


Automatic Pocket Welt Machine with laser

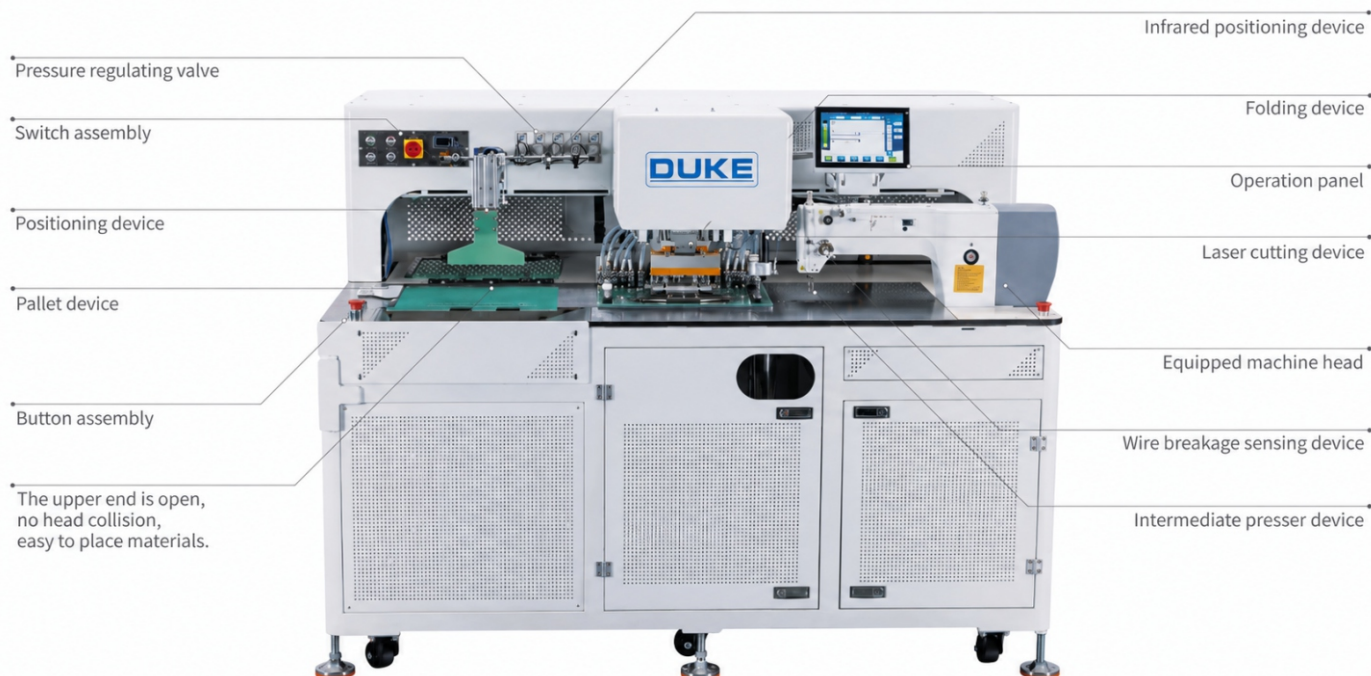

Function Overview

- 1 Simple operation, no experienced operator required, and fast learning speed.
- 2 One-step pocket opening process with no manual bag turning or pressing, improving efficiency.
- 3 Pocket sewing speed: 15–45 seconds per piece, depending on the process and operator loading speed.
- 4 Equipped with a middle presser device for stable and efficient sewing, producing neater stitches and helping reduce faults such as skipped stitches and broken needles.
- 5 External folding structure, suitable for making narrower pocket openings.
- 6 Sewing pocket size range: width 6–40 mm; length 100–260 mm.
- 7 Integrated circulating tray structure for stable, safe, and reliable operation, helping prevent collision faults.
- 8 Microcomputer-controlled adjustment allows easy switching between thick and thin fabrics without manual fixture debugging.
- 9 Upper and lower pressure feet independently press the material in both directions, ensuring stable and accurate folding.
- 10 The material folds in alignment with the table, giving a stable structure and reducing frequent machine adjustments.
- 11 Spacious operating area with a clear line of sight for more comfortable and convenient operation.
- 12 The air suction and ironing device accurately positions the cut pieces and delivers high efficiency.

Application Range


Capable of sewing 30+ pocket styles, shirt plackets, trouser zipper slits, and more. Applications and process capabilities continue to expand.




1. Single-lip Pocket
2. Double-lip Pocket
3. Large-Small Double-lip Pocket
4. Triangle-flap Double-lip Pocket
5. Double-lip Pocket with Flap
6. D-Shaped Reinforced Single-lip Pocket
7. Inclined Inner Single-lip Pocket
8. Triangle Reinforced Single-lip Pocket
9. X-Shaped Reinforced Single-lip Pocket
10. Inclined Outer Reinforced Single-lip Pocket
11. X-Shaped Reinforced Zipper Pocket




12. Zipper Pocket




13. Double-lip Zipper Pocket




14. Single-lip Zipper Pocket




15. Slant-mouth Single-lip Zipper Pocket



16. Single-security Flap Zipper Pocket




17. Double-security Flap Zipper Pocket





18. Single-lip Side Pocket



19. Zipper Side Pocket



20. Single-lip Zipper Side Pocket

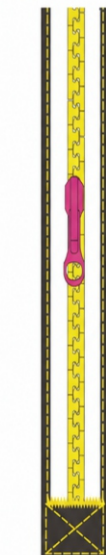

21. Zipper Placket



22. Zipper Vent



23. T-shirt Placket




24. T-shirt Placket




25. T-shirt Placket

26. Round-top Zipper Pocket




27. Round-top Zipper Pocket with Bar Tack




28. Round-top Zipper Pocket with Single Protective Flap




29. Round-top Zipper Pocket with Round Bar Tack



30. Round-head single-secure zipper pocket with bar tacks



31. Round-top dual-security zipper pocket



Model	DY G36
Pocket size	width: 6-40mm; length: 100-200mm
Equipped machine head	311 pattern machine 311
Needle used	DP × 17 (12# 14# 16#)
Needle length	1.0mm-3.5mm
Fabric positioning	Infrared spotlight line
Pocket sewing speed	15-45 seconds/piece (depending on the process and the speed of the worker placing the material)
Pocket folding method	Upward pouch and downward folding (folding bags in two or four directions at the same time)
Pocket opening method	Laser cutting method
Laser device	130W high power
Sewing working method	Putting material, laser cutting, pressing folding, pressing seam visible line, two-end reinforcement seam
Machine head sewing speed	2500-3000 sti/min
Sewing stitch programming	Operation screen input method
Stitch programming storage capacity	Can store up to 999 patterns
Thread breakage sensor	With intelligent thread break sensor
Pocket lip positioning baffle	Equipped with bag lip positioning baffle, more accurate and convenient placing of materials
Middle presser foot device	Equipped with middle presser foot, the stitching is more stable and beautiful
Presser foot lifting height	60mm-80mm
Feeding drive method	Servo motor drive (750w)
Power supply	AC 220V
Total power of equipment	1500W
Vapor pressure/air pressure consumption	0.6 Mpa(6kg/cm); 22dm/min
Occupancy area	193×138×148 cm (length×width×height)
Weight	About 650KG