

型号	Model	LS-9231C
电压	Voltage	220V 50~60Hz Single 单相
功率	Power	0.65 KW
装箱尺寸	Packing size	400*200*350 MM
净重	Net weight	4 KG
毛重	Gross weight	4.5 KG

*以上型号仅供参考，详细情况请咨询。
The above models are for reference only, please inquire for details.

*为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。
For improvement, product specifications are subject to change without notice. For safety reasons, read the manual carefully before use.

LS-9231C

修线机
Thread trimming machine



应用范围 | Application

适用各类服装工序修剪线头

Suitable for all types of garment processing process trimming line head



应用工艺 | Application process

应对不同工艺，提供标配及选配组件

Respond to different processes and provide standard and optional components

T型 刀头安装支架（标配）

T-head mounting bracket
(standard)



适用三本车拉腰车 其它机种提供选配定制支架

The is suitable for three cars Pull-up waist car Other models are available
with optional custom brackets

蜂状滤网

Bee filter



开门可见 不卡塞 易清理


Open the door and see not casserine easy to clean up

规格范围 | Specification range



功能设定 触控可视化
The function sets the touch
visualization

管理智能化~
风力 延时 刀速 清理 保养
Intelligent
Wind delay Knife speed cleaning
maintenance




导流板上下调节范围
Adjust the range down on the deflector
0 ~ 4 mm

刀片有效宽度
The effective width of the blade
35 mm

效率分析 | Efficiency analysis

110% ↑


Before 约 4.5~6s

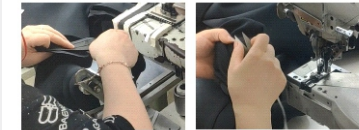

剪损风险高效率低

High shear risk and low efficiency

After 约 2~2.5s

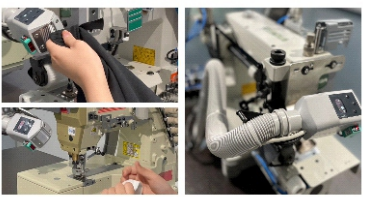

提升效率品质 避免剪损

Improve efficiency Quality Avoid shears