


We offer the best quality

RACING®

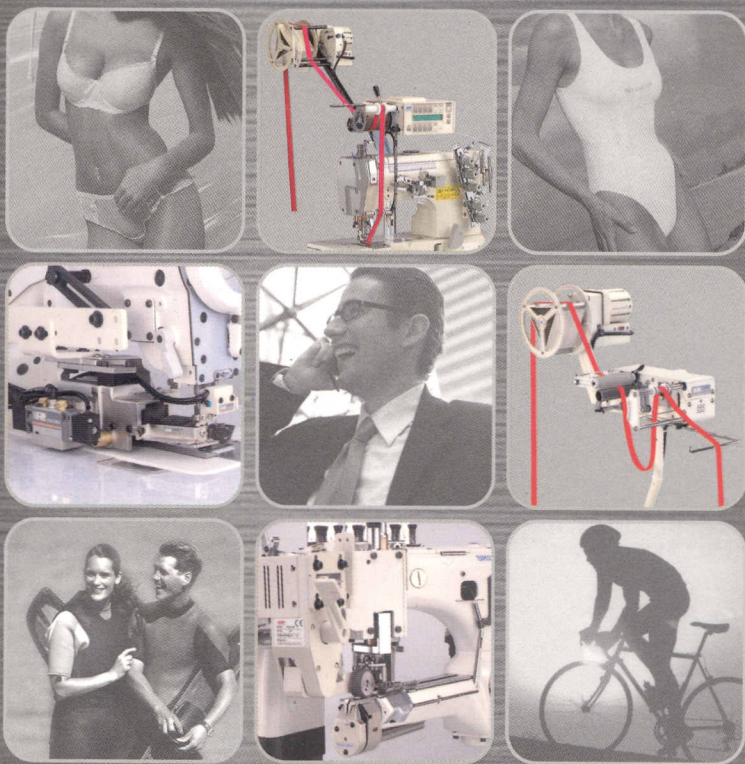

 **RACING SEWING MACHINE CO., LTD.**

Can Be Attached On Every Brand and Model RACING ATTACHMENT GENERAL CATALOGUE

目錄

CONTENTS.

電腦送帶機系列

COMPUTERIZED METERING DEVICE

MC M8	01
MC E8U	02
MCA 18	03
MC S6	04
MC 18	

拖輪系列

PULLER ATTACHMENT

PS	07
PL	
PT	
PY	08
PF	
ECV	
EFV	
PG	09
PR	
PO	
PK	
PW	10

切刀系列產品

CUTTER SERIES

TC M	12
TC A	

車縫輔助裝置系列

SUPPLEMENTARY DEVICE

MDL	13
MDK	
TFU	14
TFS	
K-1	
RTP/RTF	15
AF	
S-1/P-1	16

MC M8 系列

張力式 微電腦全方位送帶機 (主機與控制盒分離型)
Versatile Tension type computerized metering device
(The main unit is separate from the control box and display panel)

全方位功能 “隨心所欲”

VERSATILE “TO MEET ALL YOUR NEED” FUNCTION



輕薄短小 Compact Size



高效率
High Efficiency



高品質產品
High Quality



提高利潤
Increase Profit




全方位汎用型
Universal Versatility




MC M8U 上送 UPPER FEED


例一：人字車
EXAMPLE 1 : ZIG-ZAG

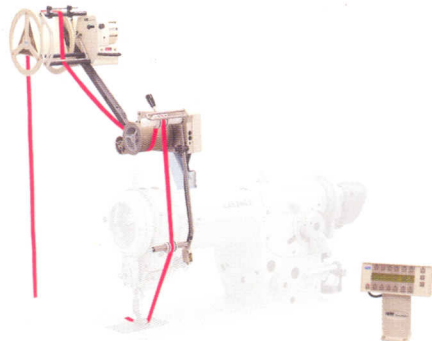

例二：飾縫車
EXAMPLE 2 : COVERSTITCH

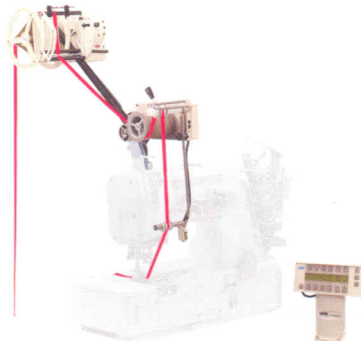


例三：包縫車
EXAMPLE 3 : OVERLOCK




MC M8S 側送 SIDE FEED

例一：人字車
EXAMPLE 1 : ZIG-ZAG

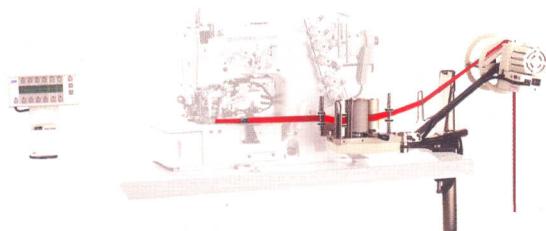


例二：飾縫車
EXAMPLE 2 : COVERSTITCH

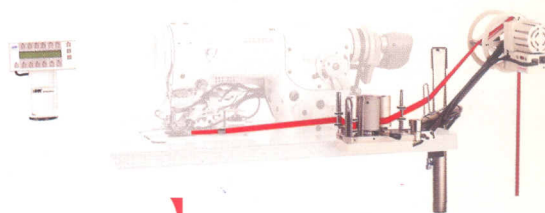


【註：MC M8U (上送) 與 MC M8S (側送) 共用
Remark : MC M8U (upper feed) and MC M8S (side feed) are interchangeable】

MC M8B 下送 BOTTOM FEED

例一：人字車
EXAMPLE 1 : ZIG-ZAG

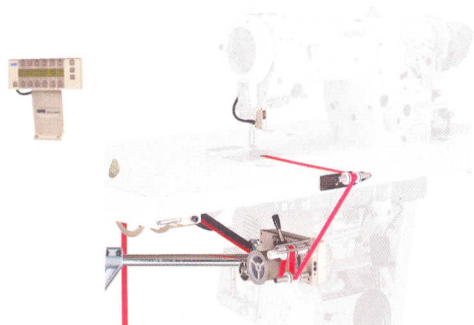

例二：飾縫車
EXAMPLE 2 : COVERSTITCH

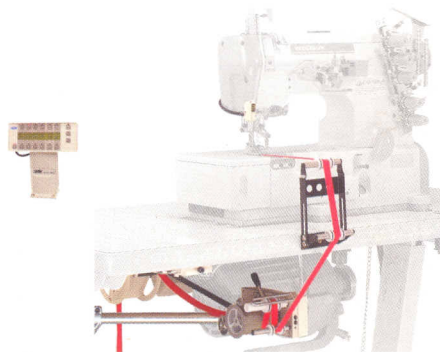


MC E8U 系列


張力式 上送專用，微電腦全方位送帶機(主機與控制盒合併型，安裝簡便)
Tension type computerized metering device for upper feed only.
(The main unit, control box and panel are all together in one unit)

MC E8U 上送 UPPER FEED


例一：人字車
EXAMPLE 1 : ZIG-ZAG

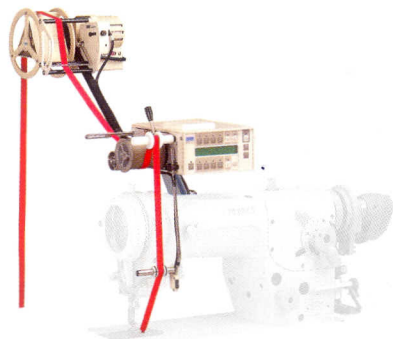

例二：節縫車
EXAMPLE 2 : COVERSTITCH



例三：包縫車
EXAMPLE 3 : OVERLOCK



配件說明

Description of accessory for MC Series



- SY ● 安裝於皮帶輪端的計數器，計算車縫的針數自動換段(選擇配件)
● Fits on the machines hand wheel to control automatic section changes(Optional Parts).




- E8 ● 膝動換段開關(標準配件)：工程換段用。
● Knee Switch(Standard) : For manual section changes.



- E10 ● LED + 手動換段(選擇配件)體積小，操作簡便。
● LED and manual section change(Optional Parts):This tiny display shows the current section being sewn and includes a switch for manual section changes.



- LED ● 換段指示燈(標準配件) 註：MCM8B(下送)不附
● Indicate Lamp (Standard Parts)
(Note : MC M8B bottom feed is not including this part)



- E9 ● 無張力開關(標準配件)
● Free Tape Function Switch(Standard Parts)



- E6-1 ● 懸吊無張力開關(選擇配件)
● Suspended switch for free tape function(Optional Parts)

訂貨說明

Order guide

MC M8 U - / SY

1 2 3

- ★ ● 微電腦多功能鬆緊帶控制裝置機型代號：
● Model for Multi-Function Computerized Elastic Metering Device :

MC M8 系 列：微電腦全方位送帶機(主機與控制盒分離型)。
MC M8 SERIES : Tension type computerized metering device for upper, bottom, side or rear feeds.
(The main unit is separate from the control box and display panel)

MC E8U 系 列：微電腦上送型(主組機與控制面板合併型，安裝簡便)。
MC E8U SERIES : Tension type computerized metering device for upper feeding only.
(The main unit, control box and panel are all together in one unit)

- ★ ● 分類：
● Feeding Type :

U : 上送
U : Upper Feeding
S : 側送
S : Side Feeding

註：MC M8U (上送)與 MC M8S (側送)共用
Remark : MC M8U (upper feed) and MC M8S (side feed)are interchangeable

B : 下送
B : Bottom Feeding

- ★ ● 配件：
● Accessory :

SY : 安裝於皮帶輪端的計數器(選擇配件)
SY : The Synchronizer Adapting in the Belt Pulley(Optional Parts)

規格表

Specifications

◎ 標準配件
Standard Parts

基座固定方式 Base Mounted place	車板 Table
工程記憶 Program & Memory	26組 每組8段(可連結，最多208段) 26 programs, 8 tensions in each program (Maximum 208 tensions after combination)
每針送帶量 Feed Range/Per Stitch	0.4~4.0mm
最高速度 MAX. Speed	可配合各種縫紉機轉速 Unlimited
SY 計數器 Stitch Counter	選擇配件 Optional
E8 膝動換段開關 Knee Switch for Manual Section Change	◎
E10 手動換段(LED+換段指示燈) Section Change by Finger (LED+Indicate Lamp)	選擇配件 Optional
LED 換段指示燈 Indicate Lamp	標準配件 (註：MCM8B 下送 不附) Standard part (Note : MC M8B bottom feed is not including this part)
E9 無張力送帶 Free Tension	◎
送帶寬度最寬 MAX. Feeding width	64mm(2 1/2" inches)
電源 Power	AC 100~240V自動切換 AC 100~240V Auto Switching

※MC M8, MC E8系列產品說明
※ MC M8, MC E8 SERIES-PRODUCT SPEC.

MCA 18 SERIES 自動切帶及送帶的功能，有27組程式及記憶，功能超強。 Auto Cutting and Re-Insert. It can Reach Different Sewing Purpose by Powerful Multi-Function with 27 Programs Memory.

- 附有切帶裝置：可縫製各種鬆緊帶製品，特別是縫製圓筒型製品的接頭，車縫中鬆緊帶可以在壓布機前自動快速切斷再重疊車縫，接頭平整美觀，車縫前後，壓布腳自動提升鬆緊帶，自動送到壓腳下待用。
- With Cutting Device: To any Elastic. Attaching Sewing. Special for Connecting the Circle Sewing. During the Sewing Operation, it Can Auto Cut the Tape Fast in front of the Presser Foot for Covering Sewing to Make the Flat and Beautiful Sewing. In the Beginning and After Finish Sewing, the Presser Foot will be Lifted Automatically. And the Elastic will be Re-Insert Into the Presser Foot to Stand By.


● 泛用型各種廠牌機型均可安裝。

● Universal mount can easily be set-up on any machine.


● 適用於泳裝、韻律裝、內衣褲...等，各種高級產品均可輕易完成。

● Ideal for attaching elastic to necks, leg openings of swimsuits or women's panties, leotards, underwear, briefs and sportswear.

MCA 18K-38 包縫車用
MCA 18K-64 FOR OVERLOCK

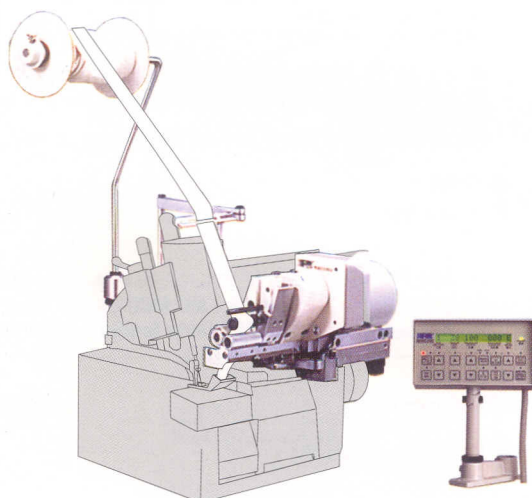

TR 鬆線裝置：MCA 18K專用(選擇配件)
Thread Release Device: For MCA 18K Only (Optional Parts)
MCA 18K-38/TR
MCA 18K-64/TR

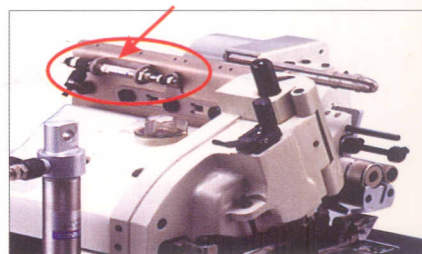


● 縫畢時可將車針的縫線放鬆便於切斷
● Release the thread for cutting thread easily after sewing.



● 適用於安裝吸入式線頭切斷裝置的包縫車
● Suitable for Overlock with Chain Cutter


MCA 18Z-19 人字車用
FOR ZIG-ZAG

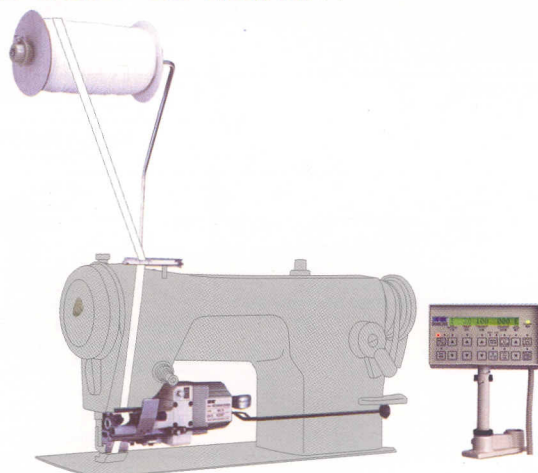

特殊機型 · 訂貨生產
AVAILABLE FOR CUSTOM-MADE

節縫車用
FOR COVERSTITCH


MCA 18C-19
MCA 18C-38
MCA 18C-64

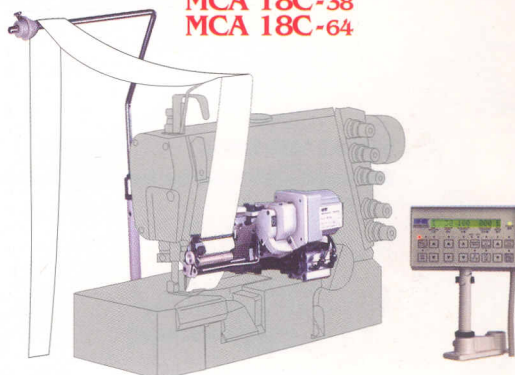


MC S6 系列

- 體積小，有六段可供選擇不同鬆緊度，送帶精確度高。
- Compact Size. Up to 6 Separate Sections are available with Precise Tension Control.
- 一般離合器馬達及定位馬達之縫紉機均可使用。
- No Matter The Motor is Clutch or Position.


MC S6Z-57 人字車用 FOR ZIG-ZAG

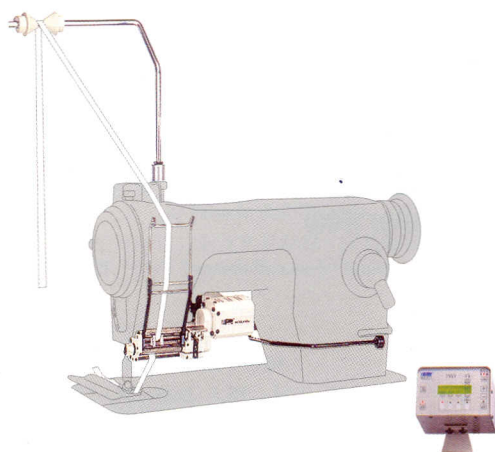


MC S6K-57 包縫車用 FOR OVERLOCK

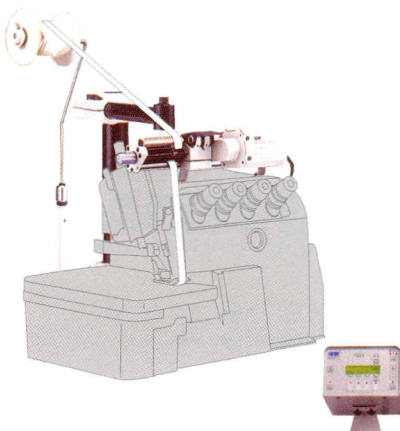


MC S6C-57 飾縫車用 FOR COVERTITCH

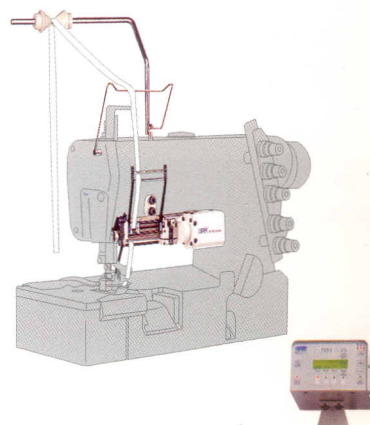

MC S6B-57 下送用 FROM BOTTOM FEED

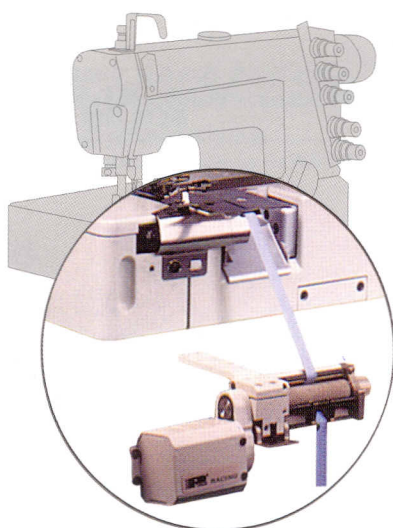


MC S6S-57 側送用 FROM SIDE FEED

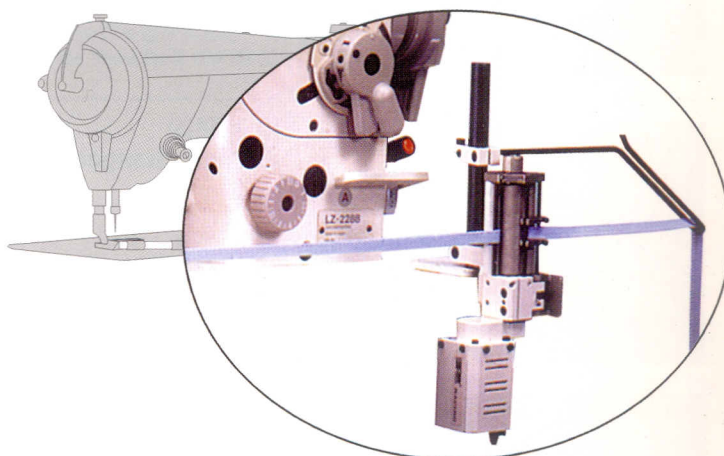


MC 18 系列

有27組程式及記憶，功能超強，可達成各種不同需求的車縫。
27 Programs Memory. It can Reach Different Sewing Purpose by Powerful Multi-Function.

MC 18Z-57 人字車用 FOR ZIG-ZAG

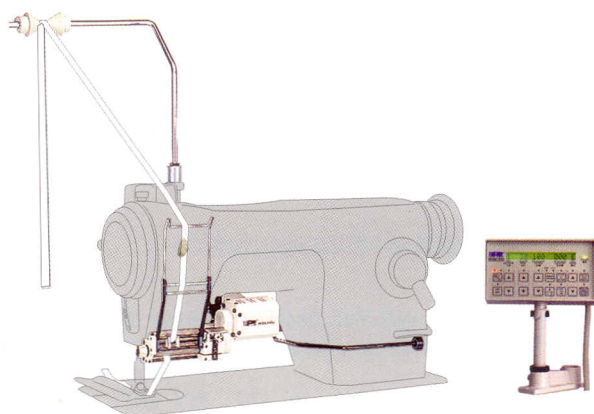


MC 18C-57 飾縫車用 FOR COVERSTITCH

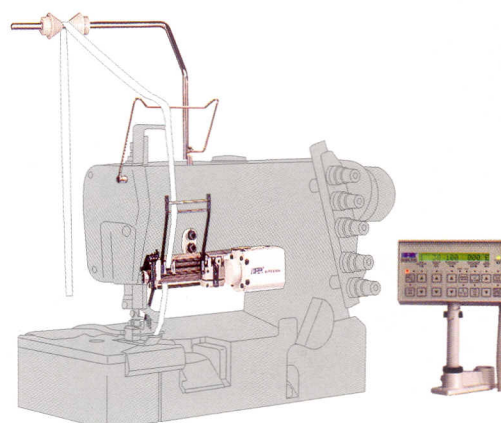

※請參照第5、6頁產品說明
※ PLEASE REFER TO PRODUCT SPEC. PER P. 5 & P. 6

MC S6·MC 18·MCA18系列配件說明

SERIES Description of accessory

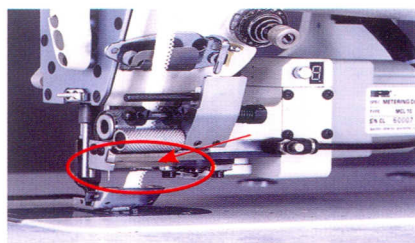


自動切帶及自動送帶 Auto Cut & Re-Insert

●縫製圓筒型製品的接頭，車縫中鬆緊帶可以在壓布腳前面自動快速切帶再重疊車縫，接頭平整美觀。車縫前後，壓布腳自動提升鬆緊帶，自動送到壓腳下待用。

●For Connecting the Cricle Sewing. During the Operation, It Can Automatically Cut the Tape Fast In Front of the Presser Foot for Covering Sewing to Make It Flat and Beautiful. In the Beginning and After Finish Sewing, the Presser Foot will be lifted Automatically. And the Elastic will be Re-Insert to the Presser Foot to Stand By.

MCA 18 系列
MCA 18 SERIES

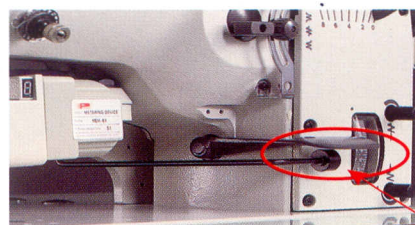

手動或自動倒針時鬆緊帶均可自動回拉。

The elastic tape can be pulled back no matter Auto or Manual Reverse Sewing.

MC S6Z, MCA 18Z, MC 18Z 系列
MC S6Z, MCA 18Z, MC 18Z SERIES




安裝於皮帶輪端的計數器

The Synchronizer Adapting on the Belt Pulley

●計算車縫針數、自動換段

●Stitch Counting for Section Change Automatically


MC S6, MCA 18, MC 18 系列
MC S6, MCA 18, MC 18 SERIES

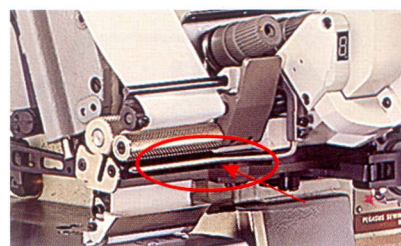

手動換段

Section changed by Finger

MCA 18 系列
MCA 18 SERIES

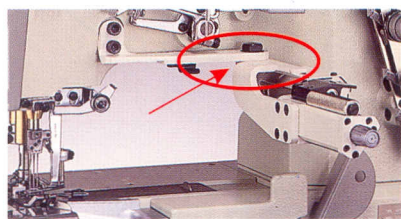

可活動基座

With Moveable Bracket


MCA 18K(MC 18Z, MCA 18Z 選擇配件)
MCA 18K(MC 18Z, MCA 18Z Optional Parts)



膝動換段

Section Changed by Knee

MC S6, MC 18系列
MC S6, MC 18 SERIES

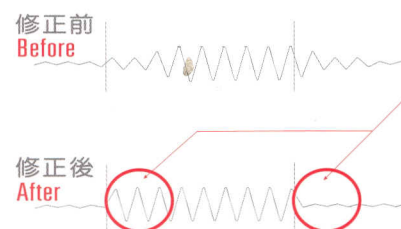

換段修正

Pre-Tension

●鬆緊帶預送及回拉：在換段時可自動偵測要預送或回拉鬆緊帶，可縫製出明確換段效果。

●Pull Back And Release The Elastic Tape: It will Pull back or Release the Elastic Tape by Sensor during Section Change. There is a Brief Effect between Sections.

MC S6Z, MCA 18Z, MC 18Z 系列
MC S6Z, MCA 18Z, MC 18Z SERIES

MCA 18 Z - 19 JUKI LZ2280N-7

1

2

3

4

5

1 ●微電腦多功能鬆緊帶控制裝置機型代號：
●Model for Multi-Function Computerized Elastic Metering Device：

MC S6: 體積小，有六段可供選擇不同鬆緊度，送帶精確度高，各種高級產品均可輕易完成。
MC S6 : Compact Size. Up to 6 Separate Sections are available with Precise Tension Control. Easy to Complete the quality Perfectly.

MCA 18: 附自動切帶及送帶功能，有27組程式及記憶，其中有5組程式可設定18段，22組可設定9段不同鬆緊度，功能超強，可達成各種不同需求的車縫。
MCA 18 : 27 Programs Memory With Auto-Cutting and Re-Insert. 5 Programs are for 18 Sections and 22 Programs are for 9 Sections. Can Reach Different Sewing Purpose by Powerful Multi-Function.

MC 18: 有27組程式及記憶，其中有5組程式可設定18段，22組可設定9段不同鬆緊度，功能超強，可達成各種不同需求的車縫。
MC 18 : 27 Programs Memory. 5 Programs are for 18 Sections and 22 Programs are for 9 Section. Can Reach Different Sewing Purpose by Powerful Multi-Function.

2 ●分類：
●Sewing Machine Type：

Z: 人字車用
Z : Zig-Zag
B: 下送 (MC S6專用)
B : Bottom Feeding (Only for MC S6)

K: 包縫車用
K : Overlock
S: 側送 (MC S6專用)
S : Side Feeding (Only For MC S6)

C: 飾縫車用
C : Coverstitch Machine

3 ●送帶寬度：
●Feeding Width (MAX)(inch)：

19 : 19mm(3/4")
38 : 38mm(1 1/2")
57 : 57mm(2 1/4")
64 : 64mm(2 1/2")

4 ●按裝之針車廠牌機型：
●Adaptable Sewing Machine Brand and Model

5 ●自動切線及附屬配件編號：
●Auto Thread Trimmer or Other Attachment Device Number

TR: 包縫車用 鬆線裝置: 適用於包縫機，裝有吸入式線頭切斷裝置，縫畢時可將縫線放鬆便於吸入線頭 (選擇配件)
TR : Release Device : Suitable For Overlock With Chain-Cutter and Vacuum. It Can Suck the Thread Easily after finishing the Sewing.(Optional Part)

SY: 安裝於皮帶輪端的計時器
SY : The Synchronizer Adapting on the Belt Pulley

規格表
Specification List

機能 Function	機型 Model	MC S6 系列 Series					MCA 18 系列 Series		MC 18 系列 Series	
	MC S6Z	MC S6K	MC S6C	MC S6B	MC S6S	MCA 18Z	MCA 18K	MC 18Z	MC 18C	
基座固定方式 Bracket Mounted place	機頭 Machine Head	車板 Table	機頭 Machine Head	車板 Table		機頭 Machine Head				
自動切帶及送帶 Auto Cut and Re-Insert						○				
工程設定 Program Set	6 段 6 Sections					5組18段，22組9段 5 Programs for 18 Sections , 22 Programs for 9 Sections				
記憶 Memory	○									
送帶量 (mm) Feed Range (mm)/PER STITCH	0.4~3.8					0.4~3.6				
自動換段・計數器 Auto Section Change Counter	○									
最高速度 MAX. Speed	6000/rpm (鬆緊帶寬度小於40mm、針目每針小於3.5mm/針) (The MAX. Width for Tape is 40mm. The MAX. Sitch/Per. is 3.5mm)									
膝動換段 Section Change by Knee	○							○		
手動換段 Section Change by Finger						○				
LED 換段指示燈 LED Indicate lamp						○				
無張力送帶 Free Tension	○									
換段修正 Pre-Tension	○					○		○		
速度補償(可調式) Compensation (Adjustable)	○									
電源 Power						AC100~240V自動切換 AC 100~240V AUTO SWITCHING				


※MC S6, MC 18, MCA 18系列產品說明
※MC S6, MC 18, MCA 18 SERIES-PRODUCT SPEC.

拖輪系列產品 PULLER ATTACHMENT


提昇品質與產量必備利器

Necessary Attachment to Improve Efficiency and Upgrade the Quality

PS 小輪、單針、雙針車用 (標準型) FOR SINGLE OR TWIN NEEDLE (REGULAR) SMALL ROLLER

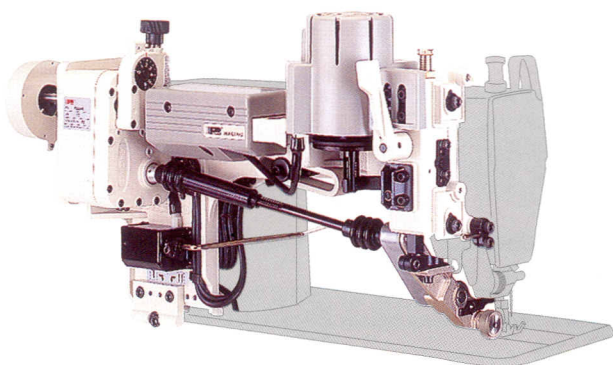


- 拖輪不用時可以提升
- Disengage roller if not needed




- 獨特設計，拖輪與車針距離超近，適合薄物，短距離即彎弧縫製。
- Extremely close pulling, facilitates curve and short sewing on thin materials.

PL 單針、雙針車用 (標準型) FOR SINGLE OR TWIN NEEDLE (REGULAR)

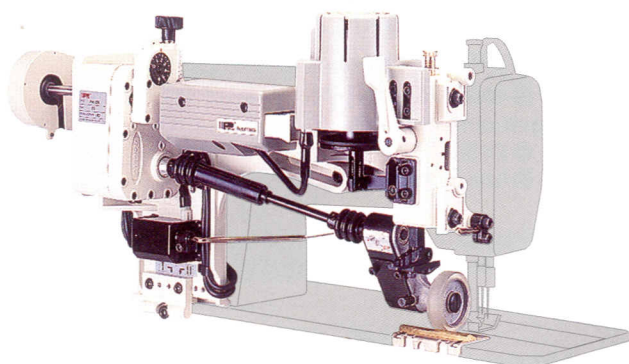


- 寬廣的操作空間
- With Large Space for Operation




- 具多種選擇性拖輪，能適應不同質料之車縫。
- With various optional rollers for different kinds of materials.

PL-S1 飾縫車用 FOR FLAT BED COVERSTITCH

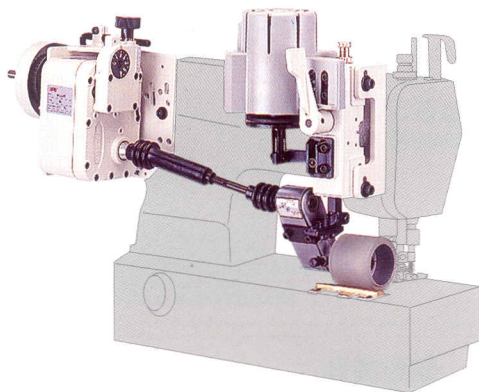


PL-S2 筒型飾縫車用 FOR CYLINDER BED COVERSTITCH

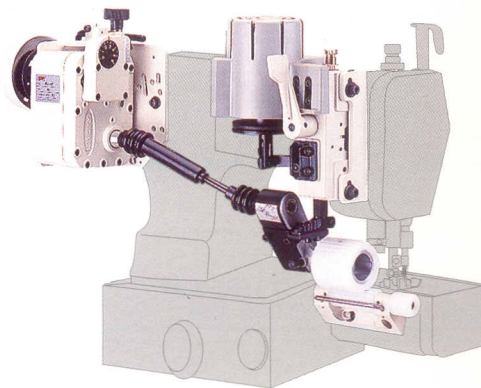


PT 單針、雙針車用 · 上下輪驅動 (標準型) FOR SINGLE OR TWIN NEEDLE WITH UPPER AND LOWER ROLLERS (REGULAR)

PT-H 單針、雙針車用 · 上下輪驅動 (厚物型) (變速機P-1) FOR SINGLE OR TWIN NEEDLE WITH UPPER AND LOWER ROLLERS (HEAVY DUTY) (Transmission P-1)

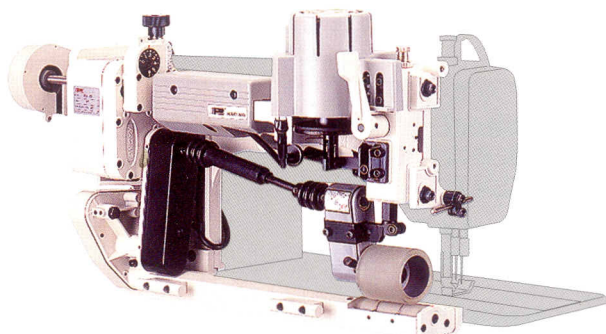


PT-L 長臂型 · 接受訂貨生產 FOR LONG ARM, AVAILABLE FOR CUSTOM-MADE

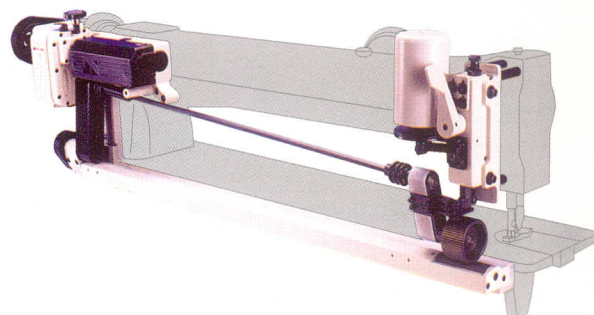


拖輪系列產品

PULLER ATTACHMENT


PY 單針、雙針車用・上下輪驅動
FOR SINGLE OR TWIN NEEDLE WITH UPPER AND LOWER ROLLERS

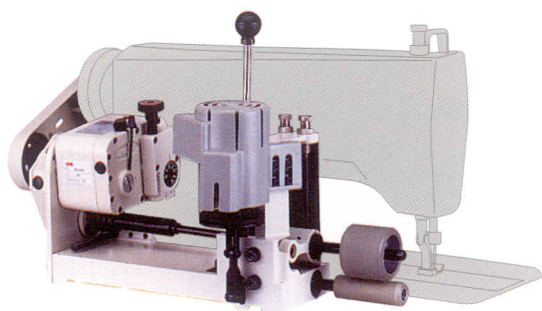

PY-SP 前拉式(義大利麵專用)
FRONT PULLER
(For spaghetti sewing)

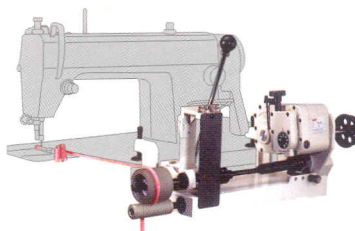


PY-C 飾縫車用
FOR COVERSTITCH




PF 腕型車用
FOR FEED-OFF-THE-ARM (REGULAR)


PF-H 腕型車用(厚物型)(變速機P-1)
FOR FEED-OFF-THE-ARM(HEAVY DUTY)(Transmission P-1)

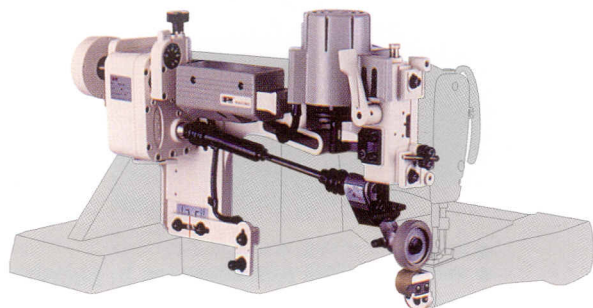

● 附下輪
● With lower roller




ECV 電動式自動切線裝置(選擇配件)
Electronic chain cutter (Optional Parts)




註：ECV裝置可單獨購買
Remark: The ECV device can be ordered individually.

PF-HB 厚物・極厚物用皮帶式拖輪(附厚物專用 1/4" 針距組)
BELT PULLER FOR HEAVY TO EXTREMELY HEAVY DUTY MATERIAL.
(With exclusive 1/4" gauge set for heavy material)


PF-RB 一般布料用皮帶式拖輪
BELT PULLER FOR REGULAR FABRIC.

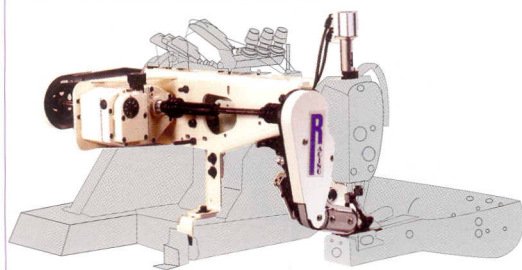

PF-HB/ECV/AF
PF-RB/ECV/AF



ECV 電動式自動切線裝置
Electronic chain cutter




註：ECV裝置可單獨購買
Remark: The ECV device can be ordered individually.


AF 氣壓式壓腳裝置
Pneumatic presser foot



PF-E 四針六線車用(電子式)
PF-E For Feed-Off-the-Arm Flatseamer(Electronic type)

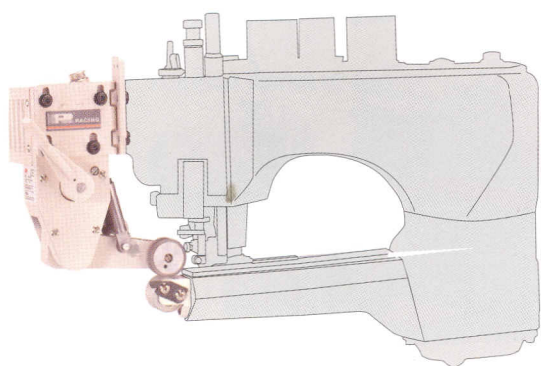

PF-E/EFV
附電動式自動切線裝置
With electronic chain cutter

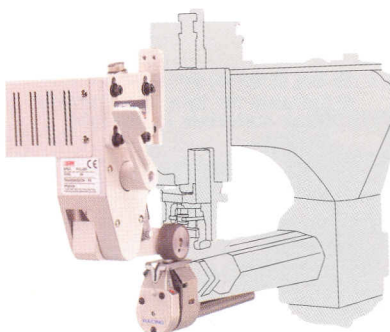

EFV 電動式自動切線裝置
Electronic chain cutter




註：EFV裝置可單獨購買
Remark: The EFV device can be ordered individually.

需空壓設備
Air compressor required

※請參照第10、11頁產品說明
※ PLEASE REFER TO PRODUCT SPEC. PER P.10 & P.11

拖輪系列產品 PULLER ATTACHMENT

PG 包縫車用・小輪(薄物用) FOR OVERLOCK WITH SMALL ROLLER(For thin material)

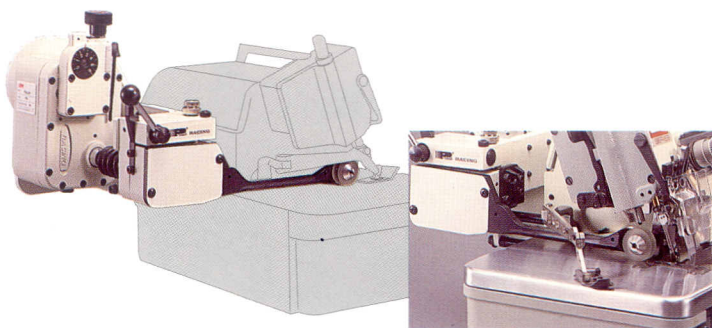


【本拖輪不能裝在附有水平或垂直式自動切線裝置的包縫車上
This puller is unable to install onto overlock machine with either vertical or horizontal automatic thread-chain cutter.】


PG 系列所需要的基本空間 Space Limitation For PG Series

- 適用機型：
●Available Models：


例：
Example：
JUKI MO 3000,6000
PEGASUS EX,MX,M
BROTHER N,V
YAMATO AZ 8000,6000
SIRUBA 757H,K

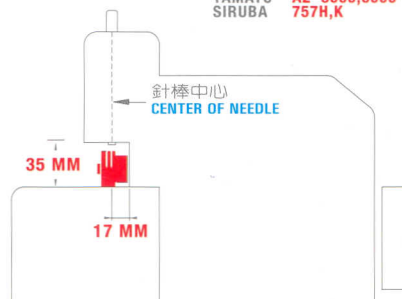

PR 包縫車用・皮帶後送(薄物用) FOR OVERLOCK WITH REAR DRIVE BELT(For thin material)

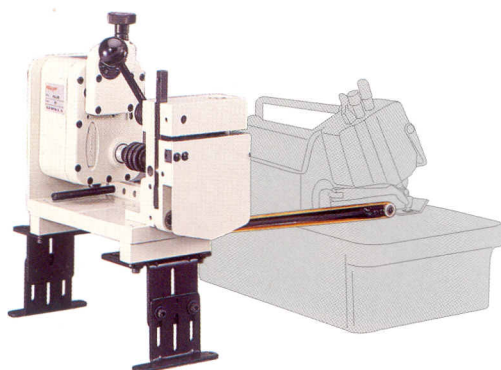


- 不受空間限制，各種廠牌機型均可安裝。
●Suitable for every machine without space limitation.

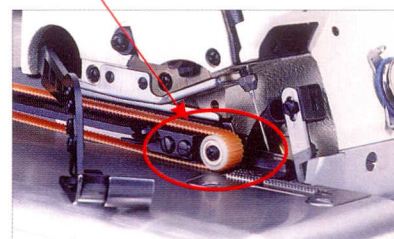


- 獨特設計，皮帶與車針距離超近。
- 適用於柔軟光滑、易皺之薄物。
- Close proximity of rear drive belt and needle improves sewing performance.
- Suitable for silky and easy-pucker thin materials.

PO 包縫車用・上皮帶送 FOR OVERLOCK WITH TOP DRIVE BELT

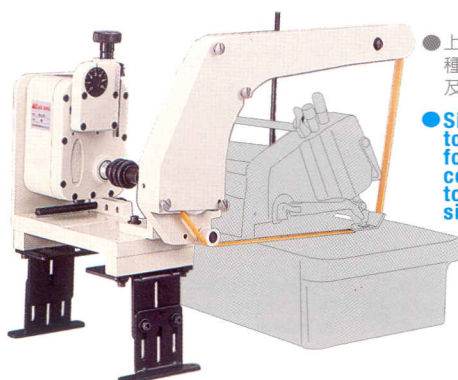


- 上皮帶驅動，適用於各種編織毛領、多層艱澀及易滑之布料。
- Simple installation with top drive belt. Suitable for different knitting collars, multi-layer tough abrasive and silky materials.

PO-F 包縫車用(有領T恤專用)附氣動式包邊器 FOR OVERLOCK (FOR SEWING THE COLLAR OF KNIT SHIRT) WITH AIR TYPE FOLDER

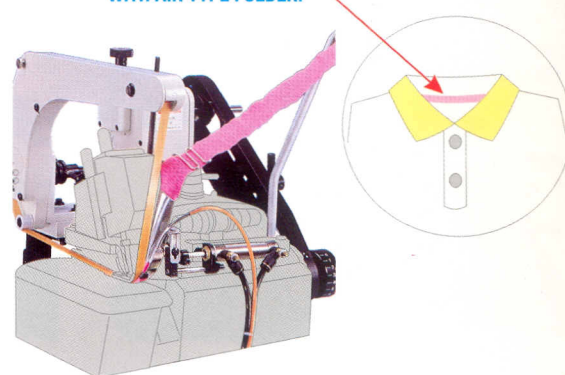

PK 包縫車用・上下輪驅動 FOR OVERLOCK WITH UPPER AND LOWER ROLLERS

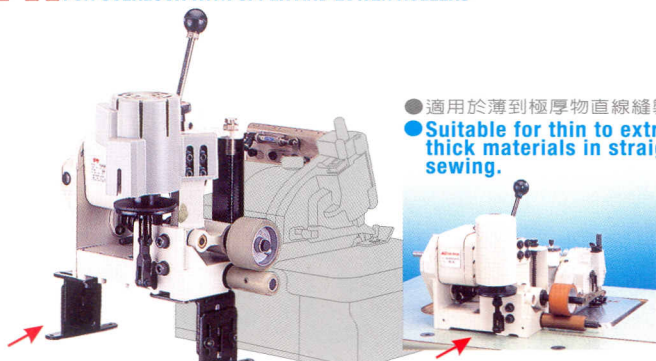


- 適用於薄到極厚物直線縫製。
- Suitable for thin to extremely thick materials in straight sewing.

●浮出式
●Floating type


●下沉式
●Submerged type

PK-SP 前拉式(義大利麵專用) FRONT PULLER (FOR SPAGHETTI SEWING)

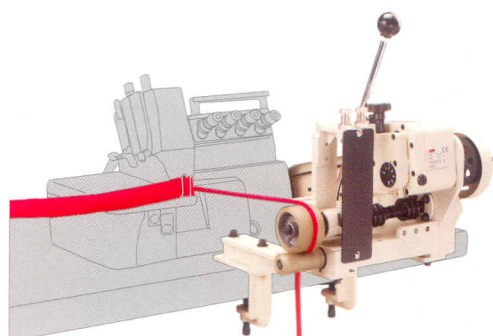


拖輪系列產品 PULLER ATTACHMENT

PW 手臂可動型盲縫車用(適用於潛水衣布料)
FOR BLINDSTITCH MACHINE WITH MOVEABLE ARM
(Suitable for diving-suit material)

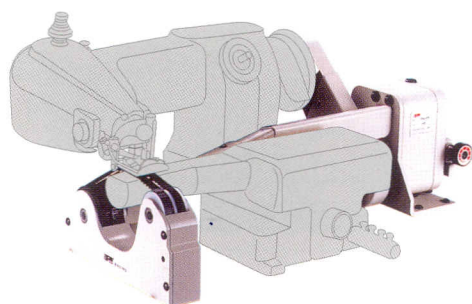



PW-L 手臂可動長臂型盲縫車用(適用於潛水衣布料)
FOR LONG ARM BLINDSTITCH MACHINE WITH MOVEABLE ARM
(Suitable for diving-suit material)

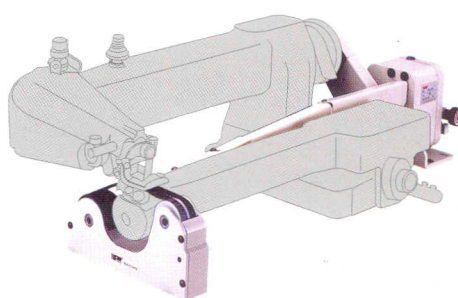

特殊機型・訂貨生產 Custom-made Order

範例
EXAMPLE

JUKI DSC-246

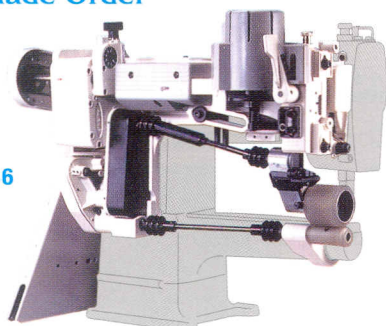

拖輪系列配件說明 Description of accessory for Puller Series

●PW、PR、PG、PO不附電控提昇組
●The roller Lifter is not included for PW, PR, PG, PO.

拉布輪提昇組：當縫紉機壓布腳提昇或自動、手動回針時，拉布輪會同時提昇。
(附有二組輸入接點，可接收自動或觸動回針及壓布腳自動提升電磁鐵信號。)

Roller Lifter : The Roller Will be lifted at the same time as the Presser Foot is lifted by Auto, Manual or Reverse Sewing.
(with two Plug sets which can connect with all Manual and Auto-Reverse signal.)

【允許此配件不在購買範圍，不需要此配件時在訂單上註明『不需要拉布輪自動提昇組』，可節省採購成本。
It allows you 『Not Buying the Roll Lifter』, in order to save your cost. Please indicate us on the order, if you do not need the Roller Lifter.】


電動提昇組：
(標準配件)

**Solenoid Lifter ;
(Regular Parts)**




氣動提昇組：
(選擇配件)


**Pneumatic Lifter :
(Optional Parts)**




E3 回針開關
E3 Reverse Switch




E4 回針開關
E4 Reverse Switch



E5 膝動開關
E5 Knee Switch




E6 懸吊開關
E6 Suspension Switch



B 座：適用於針車背部有回針電磁鐵
B Base : In case the Reverse Solenoid is at the back of Machine.


例、
EX. PL-B P5535 BROTHER LT2-8842-403

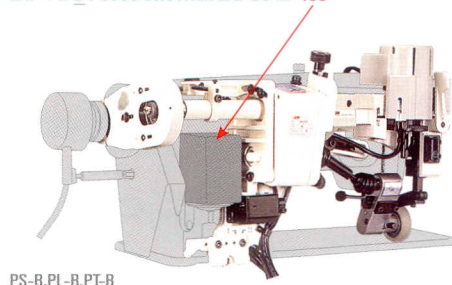

PS-B, PL-B, PT-B

AK 移位組：適用於針車背部有壓布腳電動提升電磁鐵
AK Relocation Set : In case the Auto-Lifter Solenoid in the back of Machine.

例、
EX. PL-AK P5535 JUKI DDL-555N-AK

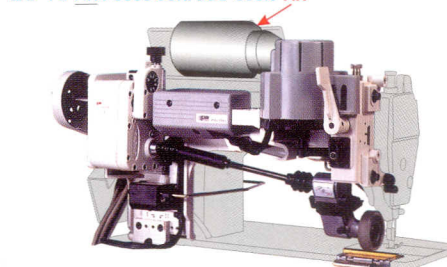

JUKI AK-34 35 84 85 88 89

需空壓設備
Air compressor required

※拖輪系列產品說明
※PULLER SERIES-PRODUCT SPEC.

拖輪訂貨說明
PULLER Order Guide

PL P 5515 BROTHER LT2 B842 - 401

1 ●機型代號說明
●Puller Model Table

4 ●安裝之針車廠牌機型
●Adaptable Sewing Machine Brand and Model
5 ●自動切線及附屬配件編號
●Auto Thread Trimmer or Other Attachment Device No.

機型 MODEL	適用針車 ADAPTABLE MACHINE	說明 DESCRIPTION
PS	單針、雙針 Single or Twin Needle	輪徑25MM，輪子與車針距離僅28-30MM，適用於薄布料短距離車縫 Diameter 25mm, 28~30mm Between Needle and Roller. For Short Thin Material, Curve and Short Sewing
PL	單針、雙針 Single or Twin Needle	輪徑55MM，輪子與車針距離50MM以上，適用於一般厚、薄布料 Diameter 55mm, More than 50mm Between Needle and Roller. For General Material.
PL-S1	節縫車 Flat Bed Coverstitch	專用基座，輪徑55MM，輪子與車針距離65MM以上，適用於一般厚、薄布料 Special Bracket, Diameter 55mm, More than 65mm Between Needle and Roller. For General Material.
PL-S2	筒型節縫車 Cylinder Bed Coverstitch	專用基座，附下輪，輪徑55MM，輪子與車針距離65MM以上，適用於一般厚、薄布料 Special Bracket, Lower Roller and Diameter 55mm, More than 65mm Between Needle and Roller. For General Material.
PT	單針、雙針 Single or Twin Needle	上下輪驅動拉力特強，輪徑55MM，輪子與車針距離130MM以上，適用於薄物到極厚物，長距離車縫 Powerful Upper and Lower Rollers, Diameter 55mm, More than 130mm Between Needle and Roller. For General Material.
PT-H		為厚物專用 Same As PT. For Heavy Material.
PT-L		為長臂型 Same As PT. For Long Arm.
PF	腕型車用 Feed-Off-Arm	輪徑55MM，輪子與車針距離60MM以上，為一般布料用 Diameter 55mm, More than 60mm Between Needle and Roller. For General Material.
PF-H		為厚物專用，功能同PF Same As PF. For Heavy material.
PF-HB	腕型車用 Feed-Off-Arm	厚物，極厚物用皮帶式拖輪 Belt Puller for Heavy to Extremely Heavy duty material.
PF-RB		一般布料用皮帶式拖輪 Belt Puller for REGULAR fabric.
PF-E	四針六線車用 Feed-Off-the-Arm Flatseamer	電子式拖輪，輪徑 32mm，輪子與車針距離為 52mm，適用於一般布料 Electronic puller, Diameter 32 mm, 52 mm between needle and roller. For regular material.
PY	單針、雙針 Single or Twin Needle	固定於車板，功能同PT Fix on Table. Same As PT Puller.
PY-C	節縫車 Coverstitch	固定於車板，功能同PT Fix on Table. Same As PT Puller.
PY-SP	前拉式單針車 Flatbed, Front Puller.	義大利縫專用，固定於車板 Special for Spaghetti Sewing. Fix on Table.
PW	手臂可動型盲縫車用 Blind Stitch With Moveable Arm	皮帶式下送料，適用於潛水衣布料 Drive Belt Feed. For Diving Suit Material.
PW-L		長臂型用 Same As PW. For Long Arm.
PG	包縫車用 Overlook	小輪輪徑28MM，適用於薄物布料 Diameter 28mm Roller. For Thin Material.
PR	包縫車用 Overlook	齒形皮帶後送，適用於薄物布料 Feeding By Timing Belt. For Thin Material.
PO	包縫車用 Overlook	齒形上皮帶送，適用於各種編織多層、艱澀及易滑布料 Feeding By Timing Belt. For Multi-Layer Tough Abrasive and Silky Material.
PO-F	包縫車用 Overlook	POLO領專用，附包邊器，膝部氣動開關及左右活動導布器 Special For Knit Shirt Collars. With Knee Pneumatic Switch to Act the Moveable Folder Right or Left Side.
PK	包縫車用 Overlook	上下輪驅動拉力特強，輪徑55MM，輪子與車針距離200MM以上，適用於薄到極厚物長距離車縫 Powerful Upper and Lower Rollers, Diameter 55mm Roller. More than 200mm Between Needle and Roller. For Thin to heavy duty.
PK-SP	前拉式包縫車專用 Overlock, Front Puller.	義大利縫專用 Special for Spaghetti Sewing.

2 ●輪子材質與外型
●Roller Material & Figures

代號 Code	P	S	T
材質 Material	PU 平面 Polyurethane Plain	鐵齒面 Steel Teeth	塑膠齒面 Plastic Teeth
外型 Figure			

※PS、PG、PO 帶式規格不適用
※Not For PW、PR、PO Series With Belt Driven Type

3 ●輪子規格
●Roller Sizes

D	材質 Diameter	W	寬度 Width
上輪 Upper roller	55	15,35,50	
	25	10,15	(PS專用) (PS only)
	32	15	(PF-E專用) (PF-E only)
下輪 Lower roller	25	60	(PK專用) (PK only)
	25	80	(PT、PY專用) (PT, PY only)
	30	22	(PF、PF-E專用) (PF, PF-E only)

※PW、PR、PO 帶式規格不適用
※Not For PW、PR、PO Series With Belt Driven Type

拖輪規格表
PULLER Specification List


機型 Model	PS PS-B	PL PL-B	PL-S1	PL-S2	PT PT-H PT-L	PY PY-C PY-SP	PF PF-H PF-HB PF-RB	PW PW-L	PG	PR	PO PO-F	PK PK-SP
功能 Function												
驅動別 Driven Way	上輪 Upper Roller	上輪 Upper Roller	上輪 Upper Roller	上輪 Upper Roller	上下輪 Upper & Lower Rollers	上下輪 Upper & Lower Rollers	上輪 Upper Roller	下皮帶 Lower Belt	上輪 Upper Roller	後皮帶 Rear Belt	上皮帶 Upper Belt	上下輪 Upper & Lower Rollers
變速機規格 (間歇性) Transmission Type (Intermittent)	P-2	P-2	P-2	P-2	PT:P-2 PT-H:P-1 PT-L:P-1	P-2	PF:P-2 PF-H:P-1 PF-HB:P-2 PF-RB PF-E: motor	P-1	P-2	P-2	P-1	P-2
拉布輪與車針距離 (最小) mm The distance Between the Roller and Needle(MIN.)mm	28	50	65	65	130	150	PF,PF-H: 60 PF-HB: 45 PF-RB: 25 PF-E: 52	——	40	40	——	200
拉布輪規格 (標準配件) Roller Type (Regular)	P2510	P5515	P5550	T5550 T2560	P5550 P2580	P5550K P2580K	PF: P5515 PF-H: S6015 PF-HB/RB: 210L PF-E: P3215	180XL037	P2811	335DMXL08	475DMXL10	P5535K P2560K
拉引長度 (mm) Puller Length (mm)	0.3~6	0.3~6	0.3~6	0.3~6	0.3~8	0.3~6	PF: 0.3~6 PF-H: 0.3~8 PF-E: 0.3~3.5	0.3~6	0.3~6	0.3~6	0.3~6	0.3~6
最高縫速 (連續車縫/間歇車縫) Sewing MAX. Speed (Continuous/Intermittent)	4000/6000				PT:4000/6000 PT-H: 3000/4000 PT-L:	4000/6000	PF :4000/6000 PF-RB : PF-H :3000/4000 PF-HB : PF-E :3000/3500	3000/4000	4000/6000			
電源 Power	AC 100~240V 自動切換 AC 100~240V AUTO SWITCHING											

※拖輪系列產品說明
※PULLER SERIES-PRODUCT SPEC.


氣動式切帶系列產品 Pneumatic Tape Cutter Series

特殊規格接受訂貨生產
Special specification Available for custom-made

TC M-L25/F

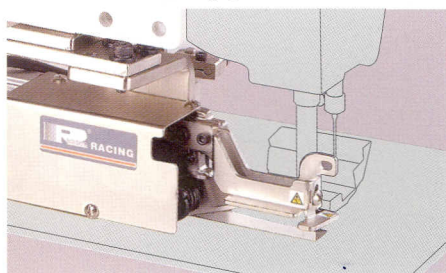

TC A-M45/F

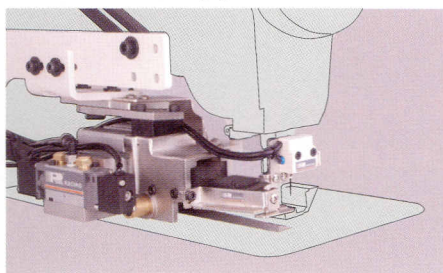

TC M-H50/C



訂貨說明 Order Guide


TC M - L25 / F
1 2 3

1 ●切帶方式 ●Tape Cutting Way

M :

- 觸動式切帶
●Manual Cutting Switch

E8 :
膝蓋觸動 (標準配備)
Knee switch
(regular parts)



E11 :
左手觸動 (選擇配備)
Left manual switch
(optional parts)




E12 :
右手觸動 (選擇配備)
Right manual switch
(optional parts)



A :

- 光電感測式自動切帶：可自動前、後切帶。含E8膝蓋觸動式切帶 (選擇配件：左、右手觸動式切帶)
- Auto Cutting by Photo-sensor:
Cut before and finish sewing material automatically. Including E8 Knee Cutting Switch
(Optional parts : Left or Right manual switch)

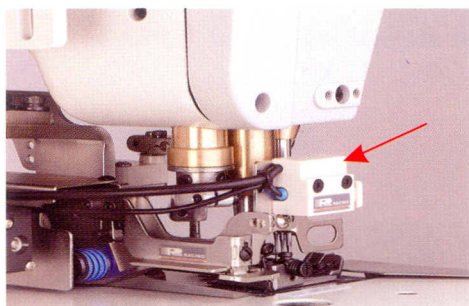

控制面板
Control panel




光電感測式自動切帶

Auto Cutting by Photo-sensor

前切 Start cut



前、後切 Start & End cut



2 ●切刀規格代號 ●Item No. of cutter


代號 Item No.		切帶寬度 mm Tape Width mm	※ 切帶能力 ※ Cutting Capability	
L25	快速切刀 Fast Tape Cutter	薄物用 Light	25 (刃長35) (blade 35)	1 層 Layer
M45	快速切刀 Fast Tape Cutter	中物用 Medium	45 (刃長55) (blade 55)	4 層 Layers
H50		厚物用 Heavy	50 (刃長60) (blade 60)	10 層 Layers

* 切帶能力是以14盎司的布料 (工作氣壓：5kg/cm²) 為準，謹供參考，購買時要以實際布料狀況為準。


* Cutting Capability is based on 14oz of material for your reference only. (Operating pressure : 5kg/cm²) Please consider the exact material condition before ordering.

3 ●安裝針車 ●Sewing Machine type


- F ●平床車用基座
●Bracket for Flatbed Machine

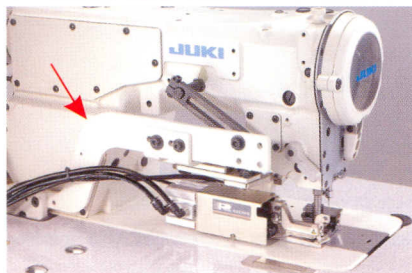

- C ●飾縫車用基座
●Bracket for Coverstitch Machine

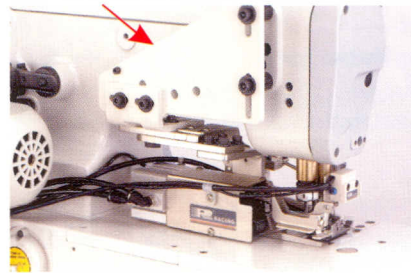

- 可活動基座 (標準配件)
●Moveable bracket (standard parts)

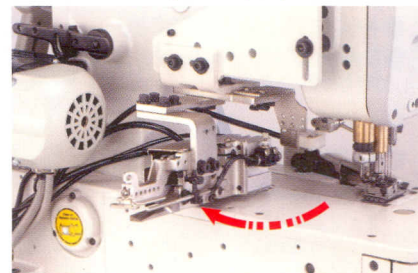

需空壓設備
Air compressor required

車縫輔助裝置系列 SUPPLEMENTARY DEVICE




MD series

機械式鬆緊帶調節裝置


Mechanical Metering Device for Elastic Tape

It pulls a great deal by
Working with Racing device


MDL 31-2 人字車用專用型 (基座固定於機頭上) FOR SPECIFIC ZIG-ZAG (Base is mounted on the machine head)

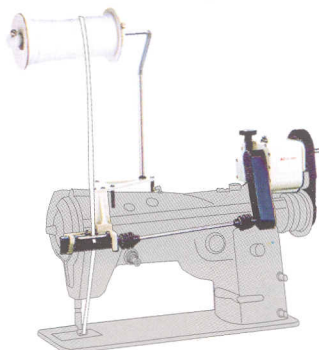


MDL 30-2 飾縫車用 (基座固定於機頭上) FOR COVERSTITCH (Base is mounted on the table)

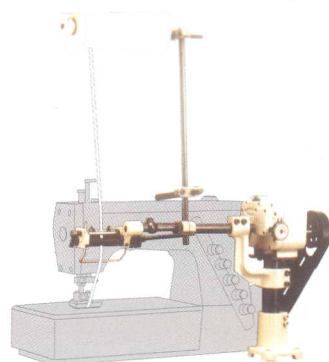

MDK 61-2 包縫車專用型 (基座固定於機頭上) FOR SPECIFIC OVERLOCK (Base is mounted on the machine head)

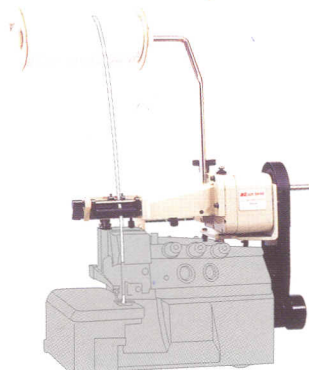

MDK 60-2 包縫車 (基座固定於車板上) FOR OVERLOCK (Base is mounted on the table)

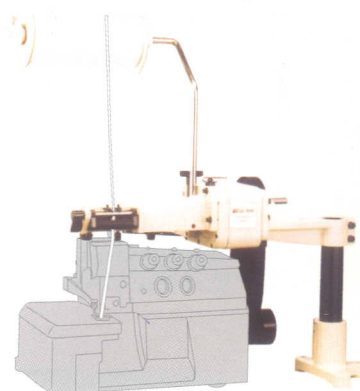

MD 訂貨說明 Order Guide

MD L 31 2 JUKI LZ2280N - 7

1 ● 機械式鬆緊帶調節機
● Mechanical Metering Device for Elastic Tape

2 ● 分類 :
● Sewing Machine Type :

L : 平床車用 K : 包縫車用
L : Flatbed Machine K : Overlock

3 ● 代號 :
● Code :

30.60 基座固定於車板上
30.60 Base is mounted on the table
31.61 基座固定於機頭上
31.61 Base is mounted on the machine head.

4 ● 送帶寬度 :
● Feeding Width :
2 : 2"(50mm)
4 : 4"(100mm)


5 ● 安裝縫紉機廠牌機型
● Adaptable Sewing Machine and Model

6 ● 自動切線及附屬配件編號
● Auto Thread Trimmer or Other Attachment Device Number


車縫輔助裝置系列 SUPPLEMENTARY DEVICE

TFU 16-3 上送型送料機，送料寬度 70mm
Upper Tape Feeder, Feed Width 70mm
TFU 16-8 上送型送料機，送料寬度 200mm
Upper Tape Feeder, Feed Width 200mm

機械式防止打結裝置 (標準配備)
Mechanical Untangling Device (Regular parts).



● 能將箱內之鬆緊帶、橡皮帶，加予抖動，
以避免糾纏打結。
● To untangle the twisted elastic Tape or cord
from the box.

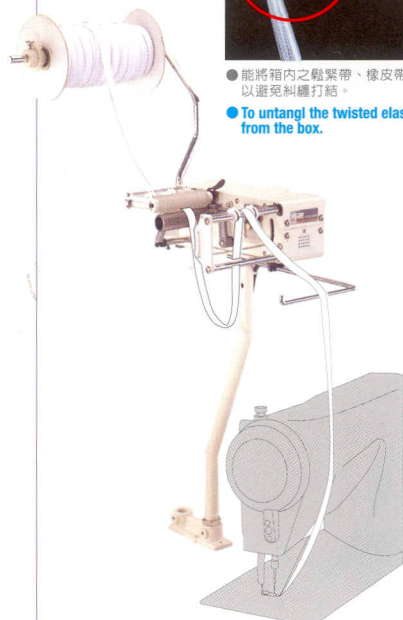


TFU 16-3/UT-2
上送型送料機 (附電動型防
止打結裝置)，送料寬度 70mm
Upper Tape Feeder (with untangling
motor device), Feed Width 70mm

UT-2 ● TFU 16-3專用
● TFU 16-3 Only.




● 旋轉式能更有效防止鬆緊帶打結及糾纏。
● To untangle the twisted or gathered elastic
tape by Motor.

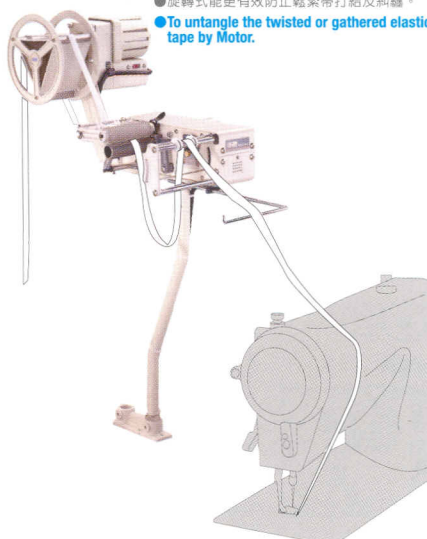


TFU 16-3/AD
三組主機，可同時送料1~3條
Triple main device to feed 1~3 Tapes
at the same time.

● 例 愛迪達運動服。
● Example: Adidas sportswear.

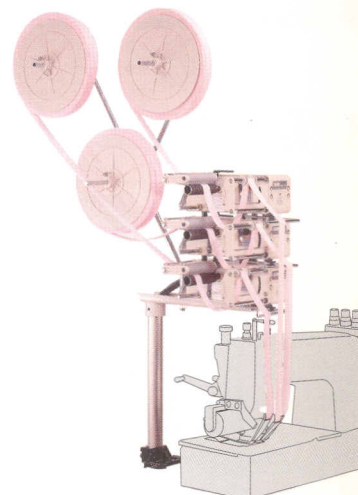

TFS 26-3 側送型送料機，送料寬度 70mm
Side Tape Feeder, Feed Width 70mm
TFS 26-8 側送型送料機，送料寬度 200mm
Side Tape Feeder, Feed Width 200mm

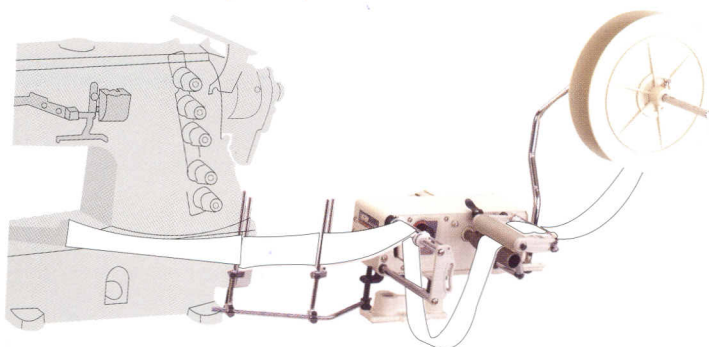

K-1 模版製作機
Pattern Cutting Machine



領子
COLLAR



領子
COLLAR




袖口
CUFF




專用配件
Special Accessory


針板
Needle Plate



送齒
Feed Dog



押腳
Presser Foot






高效率省力裝置 Hi-Efficiency Labor Saving Device

RTP 氣動型滾輪擴張裝置
Pneumatic Roller Tension Device




RTF 固定型滾輪擴張裝置
Fixed Roller Tension Device



AF 10 復歸型氣動開關
Pneumatic cycle switch




動作圖示
ACTION DIAGRAM



AF 20 保持型氣動開關
Pneumatic hold switch



動作圖示
ACTION DIAGRAM

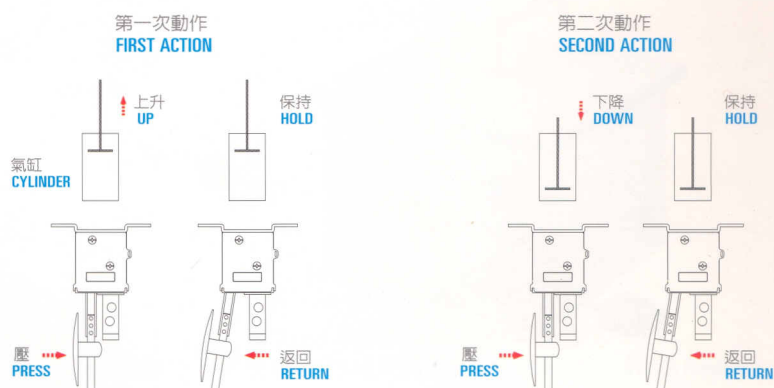


變速機 TRANSMISSON

	機型 Model	S-1	P-1	P-2
	入力軸轉數 (最高) Input Shaft RPM (MAX.SPEED)	2000	3000	3000
	出力軸轉數 (最高) Output Shaft RPM (MAX.SPEED)	430	225	450
	扭力 (kg/cm) Torque(kg/cm)	12	15	15
	重量 (kgs) Weight(kgs)	2	2	2

S-1 A W D - a b c
 1 2 3 4 5


尺寸圖
Specification

單位: mm
Unit: mm

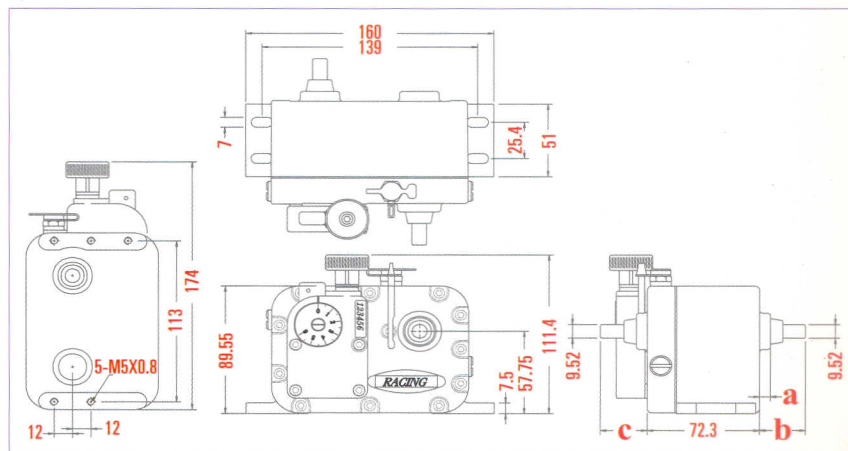


● 變速機型
● Transmission Type


S-1 連續性變速機 Continuous Transmission

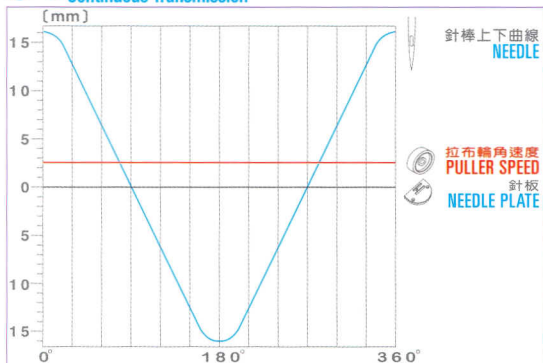


P-1 1:1 間歇性變速機 1:1 Intermittent Transmission

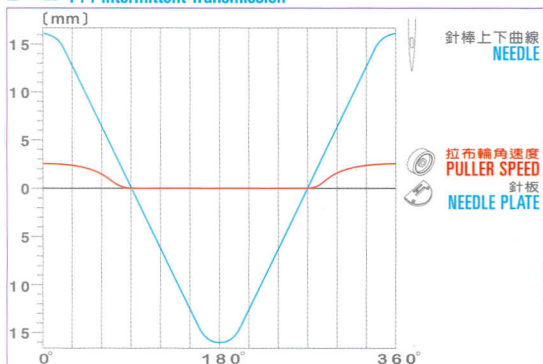


P-2 2:1 間歇性變速機 2:1 Intermittent Transmission

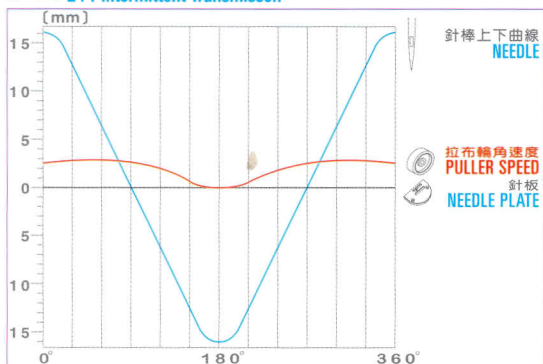

● 出力軸旋轉方向
● Rotation of Output Shaft

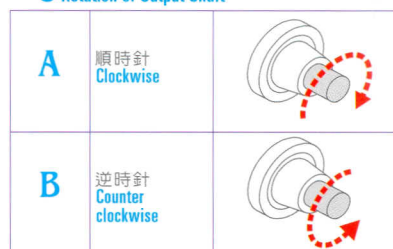

● 變速機出力軸規格
● Specification List of Input/Output Shaft



● 固定座
● Mounting Base


W	有固定座 With Base (a:7mm)	
N	無固定座 Without Base	

★ 標準品
★ Standard Type

單位: mm
Unit: mm

機型 Type	a	b	c
S-1	★ 7	30	30
	7	88	18
	7	88	30
P-1 P-2	7	102	24
	30	102	54
	★ 30	102	24
	86	182	24
	126	182	24
	126	182	54
	86	182	24
	7	52	24

● 入力/出力軸位置
● Location of Input/Output Shaft

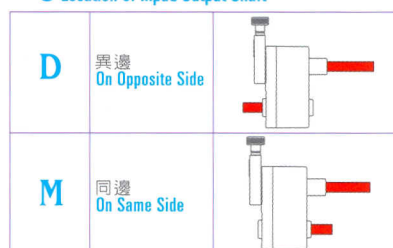



瑞爾興工業有限公司
RACING SEWING MACHINE CO., LTD.

台北縣新莊市五股工業區五權二路8號
WU KU INDUSTRY AREA, NO.8 WU CHUNG 2 RD.,
SHIN CHUANG CITY, TAIPEI COUNTY, TAIWAN.
TEL: 886-2-22981051 FAX: 886-2-22997877
<http://www.racing-tw.com> E-mail: info@racing-tw.com