

Client name: Hair Sir

Address:

House Specifications

House Length (m):	100
House Width (m):	18
Eave Height:	6.9
Ridge Height (m) :	
Birds/ House:	98112
Feed Line/ tier/ row:	1
Drinking line/ tier/ row	1
Wall material:	
House Beam Interval:	
cage aisle width	
sidewall aisle width	

Cage Specifications:

Equipment Length(m):	93
Number of rows.:	6
Number of tiers:	8
Number of 1206mm segments per row:	73
Number of segments per house:	438
Unit W (m):	0.603
Unit Depth (m):	0.65
Unit Height (m):	0.64
Density (bird/cage):	7
cm ² per bird	559.93

电压 415 50HZ, 3phase

Layer Cage system Summary

Description	Qty (House)	Unit Price(CNY)	Total Amount(CNY)
1.1. Main Feed Loading System	1	51,085.54	51,085.54
1.2. Vibration motor for Silo	1	952.62	952.62
1.3.BH Silo Weighing System	1	8,598.60	8,598.60
2.Hopper Trolley Feeding System	1	234,859.17	234,859.17
3. Layer Cage	1	2,030,179.82	2,030,179.82
4. Catwalk system	1	264,302.11	264,302.11
5. Egg Collection System	1	321,267.21	321,267.21
6. 1Central Egg Collecting System (5th house)	1	29,510.94	29,510.94
7.1 Nipple Drinking System	1	109,676.82	109,676.82
7.2 Water flushing controller and cable	1	10,376.46	10,376.46
7.3 Drinking system- Water level alarm system for each line	1	4,428.15	4,428.15
8. Cross Manure Cleaning System	1	28,028.98	28,028.98
9. Manure Cleaning Lifting System	1	15,763.41	15,763.41
10. Fan-(direct drive) (House NO.1)	1	157,632.64	157,632.64
11. Air Inlet	1	26,118.38	26,118.38
12.1 Cooling Pad system- PVC Bottom Gutter (gable wall)	1	26,107.16	26,107.16
12.2 Cooling Pad system- PVC Bottom Gutter (side wall)	1	72,200.89	72,200.89
13.1. Panel Door (gable wall)	1	31,166.02	31,166.02
13.2. Panel Door (side wall) (House NO.1)	1	76,011.91	76,011.91

14. Lighting system(Non-dimmable)	1	41,398.84	41,398.84
15. Electrical Control System	1	193,724.32	193,724.32
16.Cable System （House NO.1）	1	167,705.79	167,705.79
17. Poultry lot system （5th layer house） for free	1	6,323.94	6,323.94
Total GOODS VALUE(CNY):			3,907,419.00
Total GOODS VALUE(CNY): 22% discount			3,047,800.00
Supervision Installation for free	house	1	0.00
Inland Charge	40HQ	12	4800.00
Total Price Qingdao Port, China(CNY): （Include Supervision Installation charge ）			3,105,400.00

Note: 1. This quotation is based on single product price.

2.The cage is suitable for the birds over 70 day-aged or weighing more than 900g.

3. Supervision Installation of Big Herdsman for free. but the buyer is in charge of Big Herdsman's engineer's food and accommodation.

DETAILED ITEMS

1.1. Main Feed Loading System



This system drives the feed to move inside the feed pipe by the rotating auger, so as to send feed to inside hopper; there is a feed sensor at the end of feed line, which controls the start and stop of motor automatically.

CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CT010008	Silo(feed density 0.65t-m³)	BH-33.8m³（17.6 ton -21.9 ton） OD 3600mm, height 6600mm 8 legs	1	unit	1. 料塔注意 只Logo显示 Big Herdsman ,不能显示 中文
CT010015	Weighing accessories	Galvanized sheet silo 3668	1	unit	
CT010041	Feed dispensor	PE	1	set	
CT010043	Silo transforming adapter	PP	1	set	
CT010361	Boot	Φ125 stainless steel ， double outlets same direction	1	set	
CT010409	Feed line fixed parts		1	set	
CL010008	Soft support		2	set	
Main feed line 125					
CI170050	Drive system 125	1.5kw, 415V50HZ3p	4	set	
CT010261	Motor connection box	Φ125	2	set	
CT010269	Rain shield	fiberglass	2	unit	
CT010105	Feed sensor		6	unit	
CT010257	Feed drop	Φ125 hot galv.	24	set	
CT010262	Relay hopper	stainless steel 304	2	unit	
CT010256	Main feed line125	Φ125 PVC pipe+auger	80	m	
	125 curved pipe	PA6 +30% glass fiber φ125	16	unit	

CL010013	Feed line fixed parts	Hot galv.	18	set	
Total EXW /1 house:					51,085.54

1.2. Vibration motor for Silo



CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
	Vibration motor	/	1	set	
Total EXW /1 house:					952.62

1.3.BH Silo Weighing System




CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CLE10028	Weighing controller	BH1809	1	unit	
CLE10037	Load cell	BHN-D5T	8	unit	
CT010045	Soft connector and accessories	BH	1	set	
CLE10023	Cable and accessories	BH	1	set	
Total EXW / house:					8,598.60

Remarks: 1.The distance between weighing controller and load cell is supposed to be no more than 30m.

2.Hopper Trolley Feeding System


Hopper trolley feeds evenly, which ensures a uniform feeding, and a high body weight uniformity. The feed distributor can turn over the feed to ensure that the feed is not piled up or no previous feed exists. The hopper trolley has a low energy consumption and low maintenance rate.The hopper and feeder are separated or contact with plastic parts, which can effectively avoid wear of the feeder.The V-type feeder is used, and side feed and moldy and accumulated feed can be avoided, so as not to affect the health of chickens.



CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CT000000	Hopper trolley	8 tiers, 70kg per hopper 0.75kw 1 set per row, 0.4kw2sets per row, 415v 50hz 3p.	6	set	
CL020076	Steel wire	φ6.0mm PP coated	3762	m	
CL020064	Rail for hopper trolley	2mm,Q235	384	set	
Total EXW / house:					234,859.17

3. Layer Cage

The Big Herdsman BH600 commercial layer cage system can meet the highest requirements of users in the aspects of animal health, laying performance, environmental factors, etc. The cage body is of the stacked structure and can be designed with 3-12 tiers according to the customer's requirements.

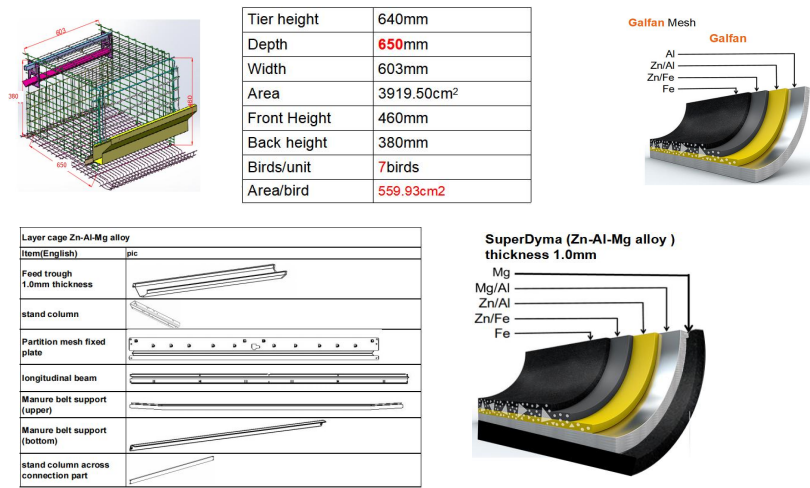

CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CL030074	Front tensioning kit	φ114 screw roll, with inner scraper	48	set	cage frame Zn-Al-Mg alloy
CL030545	Front tensioning frame	8 tiers	6	set	
	Rear driving part	8 tiers, 1.1kw 4 sets per row, 415v 50hz 3p	6	set	
CL030463	Cage frame	8 tiers Zn-Al-Mg alloy frame include stand column, Partition mesh fixed plate, longitudinal beam, Manure belt support (upper), Manure belt support (bottom), stand column across connection part	438	set	
CL030638	Baffle plate		7008	set	
CL030299	Mesh	8 tiers	438	set	
CL030819	Feed through	Thickness 1.0mm, Zn-Al-Mg	8451.648	m	
CL030605	Manure cleaning belt 1.2	PP	8784	m	
CL030272	Flatbed cart		4	set	
CL030269	Operation cart	4 tiers	4	set	
Total EXW / house:					2,030,179.82

4. Catwalk system

The catwalk is made of steel grille, pressure-welded and hot-dip galvanized, and connected by plug-in connection. The catwalk is 2.5 meters long, and the aisle catwalk is supported by zinc-free hot-dip galvanized bending parts. The catwalk has high strength, strong anti-corrosion ability, and durability, ventilation, lighting, heat dissipation, anti-skid performance; front and rear catwalk support platforms, stairs, rear drive guardrails, stair guardrails are hot-dip galvanized, safe, firm, stable, durable, and high in strength.



CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
----------	------	-------	------	------	--------------

CL030289	Catwalk	Steel grating	943	M ²	
CT000000	Aisle floor support		1	set	
CL030290	Platform support and stair in front and rear part	square tube welded hot galv. steel wire	1	set	
Total EXW / house:					264,302.11

Remarks: 1. The supporting steel beams on the side walls and gables should be responsible by customers.

2.The quotation exclude the slat grille on side wall cooling pad and dog house.

5. Egg Collection System

The in-house egg collection mainly includes the egg collecting belt, horizontal egg transmission part and egg lifting part. After the layers lay the eggs, the eggs roll onto the egg collection belt from the cage bottom wire. The horizontal egg transmission part drives the egg collecting belt and the eggs on the egg collecting belt to enter the egg lifting part tire by tier. After the eggs are turned over at the egg lifting upper part, the eggs enter the central egg collecting system or in-house manual egg picking table to complete the in-house egg collection.



CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CL040005	Horizontal egg transmission part		48	set	变频
CL040003	Egg slot	Hopper trolley feeding	48	set	
	Chain wheel box	8 tiers, 0.4kw 2set per row, 415v 50hz 3p	6	set	
	Egg lifting part	8 tiers, 0.4kw 1set per row, 415v 50hz 3p	6	set	
CL040007	Manual egg collecting table		6	set	
CL040002	Egg collecting belt	W=95mm solid domestic	17664	m	
Total EXW / house:					321,267.21

Remark:All Egg Belts to be able to be speed controlled whenever required.

6. 1Central Egg Collecting System (5th house)

The central egg collecting system can be designed for corner, slope, etc. according to the requirements of the chicken farm, which is flexible to meet various terrain requirements.






CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
C1700040	Central egg collecting system	Straight line	38	m	
CLE10008	Visual recognition counter		1	set	
CLE10015	Control box	BH	1	set	
CLE10024	Cable and accessories	BH	1	set	
CL040062	Egg deflector	570mm	6	set	
Total EXW / house:					29,510.94

7.1 Nipple Drinking System

The nipple drinking system features simple & reliable structure, good water supply & sealing.

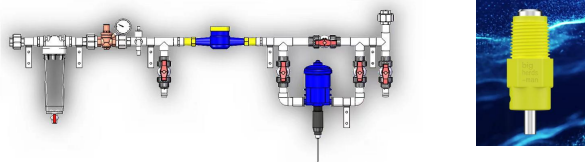


CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CL060001	Water front kit(1set)	φ32 pipe	2	set	自动反冲 黄色饮水乳头
CL060007	Electronic water gauge	φ32 pipe	2	set	
CL060009	Main water inlet tube (1set)	φ32 pipe	2	set	
CL060049	Medicator	1-5%	2	set	
CL060013	Entry kit	BH	48	set	
CL060015	Automatic recoil water pressure regulator kit	Single outlet	48	set	
CL060018	Regulator mounting and connecting assembly		48	set	
	Cage drinking line	12 nipple per 3.616m, 4 nipple per segment, yellow nipple	4136.832	m	
CL060036	V shape water trough	4.82m per unit	895	unit	
CL060044	Glue and accessories		48	set	
CL060043	End drain assembly		48	set	
Total EXW / house:					109,676.82

7.2 Water flushing controller and cable



CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CLE10050	Water level flush controller	BH1552 include cable	1	set	
Total EXW / house:					10,376.46


7.3 Drinking system- Water level alarm system for each line



CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CLE10005	Water level alarm		1	set	
Total EXW / house:					4,428.15

Remarks: The customer needs to reserve the power supply at the front of the customer's house, and the quotation includes the cable from the front to back ends of the customer's house.

8. Cross Manure Cleaning System



Automatic manure removal system outside cage ,with the frames fully galvanized. Natural rubber conveyor belts are placed to ensure a fast manure discharge speed.

CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CL050042	Manure channel cover		1	unit	
CT000000	Driving unit	2.2kw, 415v 50hz 3p	1	set	
CL050004	Cross transmission device	Belt W=0.6m	19.2	m	
Total EXW / house:					28,028.98

Remark: The oblique manure trough is against the side wall of house.

9. Manure Cleaning Lifting System

Automatic manure removal system outside cage ,with the frames fully galvanized. Natural rubber conveyor belts are placed to ensure a fast manure discharge speed.




CODE	NAME	SPEC.	QTY.	UNIT	Total Amount
------	------	-------	------	------	--------------

CT000000	Driving unit	2.2kw, 415v 50hz 3p	1	set
CL050020	Manure cleaning lifting device,L=11.2m		1	set
CL050030	Manure cleaning conveyer belt	Belt W=0.6m	21.62	m
Total EXW / house:				15,763.41

Remark: The height of manure dropping point to the flat is 3.3 m,with 28°tilt angle. (The road is level with the floor of the house) .

10. Fan-(direct drive) (House NO.1)



Ventilation design	Tunnel
Calculation:	
Cross section of room	124m ²
Calculated exhaust fan capacity	2010891m ³ /h
Calculated average air speed	4.52m/s
Calculated negative pressure(tunnel)	59.3Pa

BH50直驱拢风筒 (BH50 Fan-H0)							
负压 Static Pressure(pa)	0pa	12pa	25pa	50pa	62pa	75pa	bess# NO.
风量 Airflow (m ³ /h)	52500	50500	48400	44000	41100	37900	22179
能效比VER (m ³ /h)/w	25.7	24.2	22.9	20.4	18.9	17.4	

CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
	50" cone fan	1.5kw, China brand motor, direct drive	48	set	风机拢风筒 左右收窄 上下不收窄
CT020158	Accessories for fan sealing		48	set	
Total EXW /1 house:					157,632.64

- Remarks: 1. All holes in building for fans, minimum ventilation inlets and tunnel inlets to be provided by building contractor.
2. All holes for fans, minimum ventilation inlets and tunnel inlets to be framed and sealed (air tight) and the cost thereof is customer's account.
3. Excludes All Frames.

11. Air Inlet

The Air inlet system adjusts the indoor wind speed and volume according to the opening of the Air inlet so as to achieve the ventilation and cooling effect.




CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CT030192	Side wall long air inlet	Open size:1200mm*270mm	90	set	
CT030087	Rain cover for side wall long air inlet	For 1.2m long air inlet, 412*370*1340	90	set	
CL070010	Air inlet sealing glue	The gap is less than 5mm	90	set	
CT030097	Auto motor (manual control available)		1	set	
CBE10078	Manual switch		1	set	
CT030099	Suspension and traction accessories		2	set	
Total EXW /1 house:					26,118.38

Remarks: Air inlet sealing adopts glass glue or polystyrene foam. If the gap on site is above 5mm, the sealing cost has to be added accordingly.

12.1 Cooling Pad system- PVC Bottom Gutter (gable wall)

(add on type)

Cooling pad is mainly used for poultry house cooling and humidification. The mode of "cooling pad-negative pressure fan" is mainly used, and the working principle goes like that: The cooling process of the cooling pad is completed in its core "cooling pad paper". When the outdoor hot air is sucked into the cooling pad paper covered with cooling water by the fan, the cooling water will be transformed from liquid to gaseous water molecules, which absorb a large amount of heat energy in the air, so that the temperature of the air drops rapidly. After being mixed with indoor hot air, it will be discharged outdoors by the negative pressure fan.



one side coating
black

Cooling pad Height

Cooling pad Length

Cooling pad Height

Cooling pad Length

Gable wall 2.5

16.8

Side wall

Sides Qty 2

Sides Qty

CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CT030021	Cooling pad paper	δ=0.15m, angle: 45°45, one side black	85.008	M ²	
CL070049	Water trough (including upper frame and lower frame)	Associated with 0.15 pad, only lower water trough is pvc	33.6	linear meter	
CT030002	Aluminium alloy side frame	Associated with 0.15 pad	10.24	M	
CT030016	Reinforcing piece		33.6	M	
CT030190	Water recycle system		33.6	M	
CT030008	Filter	Black	2	set	
	Self-priming pump	1.1kw415V 50HZ 3P 2.1A,water quality requirement PH6.5-8.5	2	set	
CL070024	Self-priming pump fixed part		2	set	
CT030017	Cool pad sealing material charge	BH	17	set	
Total EXW / house:					26,107.16

Remarks: 1. All holes in building for fans, minimum ventilation inlets and tunnel inlets to be provided by building contractor.

2. All holes for fans, minimum ventilation inlets and tunnel inlets to be framed and sealed (air tight) and the cost thereof is customer's account.

3. Excludes All Frames.

12.2 Cooling Pad system- PVC Bottom Gutter (side wall)

(add on type)

Cooling pad is mainly used for poultry house cooling and humidification. The mode of "cooling pad-negative pressure fan" is mainly used, and the working principle goes like that: The cooling process of the cooling pad is completed in its core "cooling pad paper". When the outdoor hot air is sucked into the cooling pad paper covered with cooling water by the fan, the cooling water will be transformed from liquid to gaseous water molecules, which absorb a large amount of heat energy in the air, so that the temperature of the air drops rapidly. After being mixed with indoor hot air, it will be discharged outdoors by the negative pressure fan.



one side coating
black

Cooling pad Height

Cooling pad Length

Cooling pad Height

Cooling pad Length

Gable wall

Side wall 2.5

24

Sides Qty

Sides Qty 4

CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CT030021	Cooling pad paper	δ=0.15m, angle: 45°45, one side black	242.88	M ²	
CL070049	Water trough (including upper frame and lower frame)	Associated with 0.15 pad, only lower water trough is pvc	96	linear meter	
CT030002	Aluminium alloy side frame	Associated with 0.15 pad	20.48	M	
CT030016	Reinforcing piece		96	M	
CT030190	Water recycle system		96	M	
C0000480	Filter	Black	4	set	
	Self-priming pump	1.5kw 415V 50HZ 3P 2.1A,water quality requirement PH6.5-8.5	4	set	
CL070024	Self-priming pump fixed part		4	set	
CT030017	Cool pad sealing material charge	BH	48	set	
Total EXW / house:					72,200.89

Remarks: 1. All holes in building for fans, minimum ventilation inlets and tunnel inlets to be provided by building contractor.

2. All holes for fans, minimum ventilation inlets and tunnel inlets to be framed and sealed (air tight) and the cost thereof is customer's account.

3. Excludes All Frames.

13.1. Panel Door (gable wall)

Baffle is installed at the inner air inlet of cooling pad system. It can be closed in cold weather for heat preservation, and used for adjusting the air inlet opening degree and the direction of fresh air during ventilation in summer.



Board size: 0.65

Opening Length: 16.8

Tier Qty: 3

Sides Qty: 2

subsection: 2

CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CT030113	FRP sandwich panel	FRP sandwich panel, EPS foaming M15-H50	66.69	M ²	
CT030116	Aluminum alloy margin cover	Aluminum alloy, for H50	220.8	M	
CT030117	Sealing strip	EPDM	231.84	M	
CT030110	Frame and fixing parts	Gable wall	297.2	M	
CT030185	Adjusting arm system		72	set	
CT030119	Panel door accessories	single tier	100.8	m	
	Auto motor (manual control available)	0.55KW, 3p 415V 50HZ	2	set	
CBE10078	Manual switch		2	set	
Total EXW/ house					31,166.02

13.2. Panel Door (side wall) (House NO.1)

Baffle is installed at the inner air inlet of cooling pad system. It can be closed in cold weather for heat preservation, and used for adjusting the air inlet opening degree and the direction of fresh air during ventilation in summer.



Board size: 0.65

Opening Length: 24

Tier Qty: 3

Sides Qty: 4

subsection: 2

CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CT030113	FRP sandwich panel	FRP sandwich panel, EPS foaming M15-H50	189.54	M ²	
CT030116	Aluminum alloy margin cover	Aluminum alloy, for H50	614.4	M	
C0000507	Sealing strip	EPDM	645.12	M	
CT030117	Frame and fixing parts	Sidewall	628.8	M	
C0000508	Adjusting arm system		168	set	
CT030119	Panel door accessories	single tier	288	m	
	Auto motor (manual control available)	0.55KW, 3p 415V 50HZ	4	set	
CBE10078	Manual switch		4	set	
Total EXW/ house					76,011.91

14. Lighting system(Non-dimmable)



CODE	NAME	SPEC.	QTY.	UNIT	Total Amount
CLE10052	Lighting	Without bulb、waterproof lamp fixture	14	set	2. 41m/bulb
	LED bulb	Non-dimmable	562	unit	
CLE10019	LED bulb	Non-dimmable, used for front&back	26	unit	
Total EXW / house:					41,398.84

Remarks: 1..Lighting standard for layer: no less than 20lux (test points are 1.7 meters directly below the bulb), colour temperature 2800-3000k.

2.If you do not buy our bulbs, please specify:

- 1) Customers need to choose a standard E27 screw port, waterproof LED bulb lamp, the bulb lamp power is 12W and below, and the E27 screw port and the lamp body are smoothly transitioned, and there is no platform between the screw port and the lamp body.
- 2) Customers need to choose LED lights that support leading-edge phase-cutting or trailing-edge phase-cutting. Because the performance and parameters of dimming lamps produced by various manufacturers are inconsistent, it cannot be guaranteed to be fully compatible with our dimming power supply, and the brightness may be different (AC modulation Optical system).
- 3) Avoid choosing incandescent or tungsten lamps, otherwise the waterproof lamp socket will be burned.Our company is not responsible for direct or indirect losses due to the loss caused by the customer choosing the bulb lamp that does not meet the above requirements.

15. Electrical Control System


BH9200 controller is a special layer environment controller, which can automatically control multiple sets of fan, but according to control the operation of the wind generator day age, automatically control, lighting, cooling pump (cooling pad) , air inlet and curtain, such as equipment, has a unique air inlet control system, fine cooling function, day and night mode, 3D interface display and other functions, and access to BH IOT system.



CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CLE10061	Climate controller 9200	10", for layer cage	1	unit	
CTE10037	Negative Pressure Module		1	unit	
CTE10034	Temperature sensor	BH	13	set	
CTE10035	Humidity sensor	BH	1	set	
CTE10040	CO2 sensor	Domestic	1	set	
CBE10077	Negative pressure meter		1	set	
CI160003	Smart alarm	sound & light alarm (only batteries provided by the user)	1	set	
CTE10034	Temp. sensor	BH	1	set	
CLE10009	Control cabinet	Climate controller+egg collection, incl.Frequency converter	1	set	
CLE10011	Control cabinet	feed collection	1	set	
CLE10013	Control cabinet	fan	1	set	
CLE10014	Control cabinet	manure cleaning	1	set	
	Isolator	For fan,Manure clean system, hopper trolley	92	set	
Total EXW / house:					193,724.32

Remarks: The customer needs to reserve the power supply at the front of the customer's house, and the quotation includes the cable from the front to back ends of the customer's house.

16.Cable System （House NO.1）

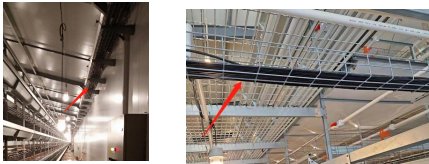

CODE NO.	NAME	SPEC.	QTY.	UNIT	Total Amount
CLE10051	Cable trough	grill	1	set	
CLE10022	Cable and wire and accessories		1	set	
Total EXW / house:					167,705.79

Remarks: The customer needs to reserve the power supply at the front of the customer's house, and the quotation includes the cable from the front to back ends of the customer's house.

17. Poultry lot system （5th layer house）for free



CODE NO	NAME	SPEC.	QTY.	UNIT	Total Amount
CLE10058	Data collector	BH FarmNet	1	unit	
CTE10117	Alarm modules	BH1603	1	unit	
CLE10059	Optical network equipment	BH FarmNet	1	unit	
CLE10060	Communication cables and accessories		1	set	
Total EXW / house:					6,323.94

Remark: 1.Buyer should arrange the local operator or network company to fuse the fiber.Buy need provide one UPS power supply by local due to ocean transportation limit

Terms and Condition:

- 1 Price in CNY and Quantity stated above. Any additional equipment and service, the price will be increased accordingly.
- 2 **Payment:** 30% down payment of contract total amount by TT shall be made in one week after signing the contract. 70% balance is made by TT or L/C before shipment. In case of partial shipment, the balance shall be paid in installments.
- 3 **Production period:**60 working days after receiving down payment.
- 4 **Installation:**
The quotation does not include installation and civil works. Big Herdsman's engineer(s) can be dispatched to the project site as the request of the buyer. The engineer(s) will be responsible for supervision of installation, testing and training for free. the buyer is in charge of Big Herdsman's engineer's food and accommodation.
- 5 **Price adjustment:**
If the exchange rate and/or the purchase price for raw materials of steel and/or plastics, increasing after the signing date of the contract(starting point) by more than 5%, the seller is entitled to demand to increase the sales prices.
- 6 **Freight:**
The quoted freight charge is subject to the BH's actual cost. BH reserves the right to increase the freight charge in case the market price soaring.
- 7 **Price validity:** 21days.
- 8 **Electrical Power Quality (permitted range):**
415V 50Hz, 3P, voltage fluctuation permitted range $\pm 7\%$
- 9 **Important reminders:**
a. The buyer is supposed to distribute cable wires into distribution box in operation room. Any electrical device or instrument damaged due to voltage exceeding the permitted range, Big Herdsman will not be responsible for the loss.
b. The output power of fan will be influenced by the pressure in bird house, and they are positive correlation. Please select proper transformer and cable as per upper limit of fan working load and reserve some allowance, Big Herdsman will not be responsible for equipment damage caused by unmatched transformer and cable selected by the buyer.
- 10 According to the definition of the international Maritime Dangerous Goods (IMDG)Code, the installation materials within the scope of the code shall be provided by the customer-self. This quotation list also does not include these materials.(like as Glue adhesive,foamed adhesive,paint,lubricating oil,battery etc.)