

Agrumi-Gel s.r.l.	COMUNICAZIONE INTERNA	M 01.03
-------------------	-----------------------	---------

Data 02/04/2024

Ricetta n.77 - Richiesta di produz. 73

Emesso da: Laboratorio

OGGETTO: Trasmissione ordine di produzione

LOTTO DA PRODURRE	SLNB 7/24 PF	Contratto N° 12
CLIENTE	F.R.D.P. FRANCE RECHERCHE ET DEVELOPPEMENT	
PRODOTTO:	SLNB - Succo di Limone Biologico NFC	
KG.	20736	CAMPIONE N°
TIPO IMBALLO	Jerry cans - 18	TARA 18 N° 1152
TIPO SACCHI		MISURA N°
TIPO PALLET	fumigata	MISURA 100 x 120 fumi N° 288
REGETTA	X	VELOFILM X SIGILLI
N.ETICHETTE OGNI IMBALLO		TIPO PASTORIZZAZIONE Tubolare
Note:		

RIMANENZA	Lavaggio	
KG.	0	SLNB 7/24 PF LAV
TIPO IMBALLO		TARA N° 0.00
ETICHETTE		N°
RIMANENZA	Rimanenza - Prodotto finito da rilavorare	
KG.	2060	SLNB 7/24 PF RIM
TIPO IMBALLO		TARA 200 N° 10.30
ETICHETTE		N°

Documenti Allegati:

MODULO RILEVAMENTO COSTI E DATI DI PRODUZIONE
 MODULO RILEVAMENTO COSTI E DATI DI PRODUZIONE + FORMULAZIONE
 CHECK-LIST/CONTROLLO DI PRODUZIONE E CONFEZIONAMENTO
 CONSEGNA ETICHETTE E SIGILLI
 MODULO RILEVAZIONE TEMPERATURE PASTORIZZAZIONE

M 09.12 01
 M 09.12 03
 D 10.05 A
 D 10.06
 M 09.10


Destinatari:

Addetto Reparto Prodotti Finiti M01.03
 Addetto Triturazione M09.12 02
 Addetto Movimentazione Cella M09.12 01

06	19/06/2023	AGGIORNAMENTO	ELSA LIGA	SALVATORE RIZZO
Rev.	Data	Motivo della revisione	Emesso da	Approvato da

I moduli allegati dovranno essere compilati in ogni loro parte. Ad avvenuta esecuzione dell'attività lavorativa e consegnati firmati al sig. **Settineri David**, il quale avrà cura di consegnarlo al sig. **La Malfa Lorenzo**, il quale provvederà a scaricare dal magazzino i prodotti dei quali lui è responsabile e consegnare gli interi documenti all'ufficio accettazione

Agrumi-Gel s.r.l.										MODULO RILEVAMENTO COSTI E DATI DI PRODUZIONE										M 09.12 03																																																											
PRODOTTI: Succo di Limone Biologico NFC										CLIENTE: F.R.D.P. FRANCE RECHERCHE										DATA PRODUZIONE 26/03/2024																																																											
KG. 20736										LOTTO SLNB 7/24 PE										CAMPIONE N.																																																											
LOTTO PRODOTTI										Q.TA' PREVISITA										Q.TA' EFFETTIVA		TINO 1		TINO 2		TINO 3		TINO 4																																																			
SLNB-E 6/23										N° FUSTI										TARA		TOT.		PREVENTIVO		EFFETTIVO		PREVENTIVO		EFFETTIVO																																																	
SLNB 3/24										85,00										200		17000		5000,00																																																							
TOTALE										22000												22000,00																																																									
N°										CONFEZIONATI COME PF										RIMANENZA CONFEZIONATA IN N°										LAVAGGIO IN N°										FUSTI																																							
TIPO IMBALLO										DA										KG. NETTI CADAUNO										CON N°										SACCHI										LOTTO										TIPO																			
LOTTO IMBALLO																																								IMBALLO																																							
APPORRE N°										ETICHETTE PER OGNI										SISTEMARE IL CARICO SU N°										PALLET																				MISURA																													
REGETTA										VELOFILM										SIGILLI																																																											
NOTE																																																																															
PARTE DA COMPILARE A CURA DELL' ADDETTO PRODOTTI FINITI																																																																															
1. PREPARAZIONE BLENDING										OPERATORE 1:										DATA										DALLE ORE:										ALLE ORE:										CCP 4 PH BLENDING:																													
PULIZIA FILTRO INIZIALE										FIRMA OPERATORE										PRESENZA COPRI ESTRANEI NEL FILTRO										FIRMA OPERATORE										TIPO FILTRO:										FORATA:										*IN CASO DI FILTRAZIONE CON FILTRO MILLIPORE ALLEGARE SCONTRINO INTEGRITY TEST																			
SI NO										SI NO										SI NO										SI NO										SI NO										SI NO										SI NO										SI NO									
PULIZIA FILTRO FINALE										FIRMA OPERATORE										In caso di presenza di corpi estranei nel filtro postfiltrazione far pervenire il copro estranei a LAB per identificazione										PRESSIONE D'ESERCIZIO INIZIALE										PRESSIONE D'ESERCIZIO FINALE																																							
SI NO										SI NO										SI NO										SI NO										SI NO										SI NO										SI NO										SI NO									
CCP 2 INTEGRITA' FILTRO INIZIALE										DATA										ORA										FIRMA OPERATORE										FIRMA RESPONSABILE																																							
SI NO										SI NO										SI NO										SI NO										SI NO										SI NO										SI NO										SI NO									
CCP 2 INTEGRITA' FILTRO FINALE										DATA										ORA										FIRMA OPERATORE										DATA, ORA E FIRMA AVVENUTO CONTROLLO																																							
SI NO										SI NO										SI NO										SI NO										SI NO										SI NO										SI NO										SI NO									
19										01/06/2023										AGGIORNAMENTO										ELSA LIGA										SALVATORE RIZZO																																							
REV.										DATA										MOTIVO DELLA REVISIONE										EMESSO DA:										APPROVATO DA:																																							

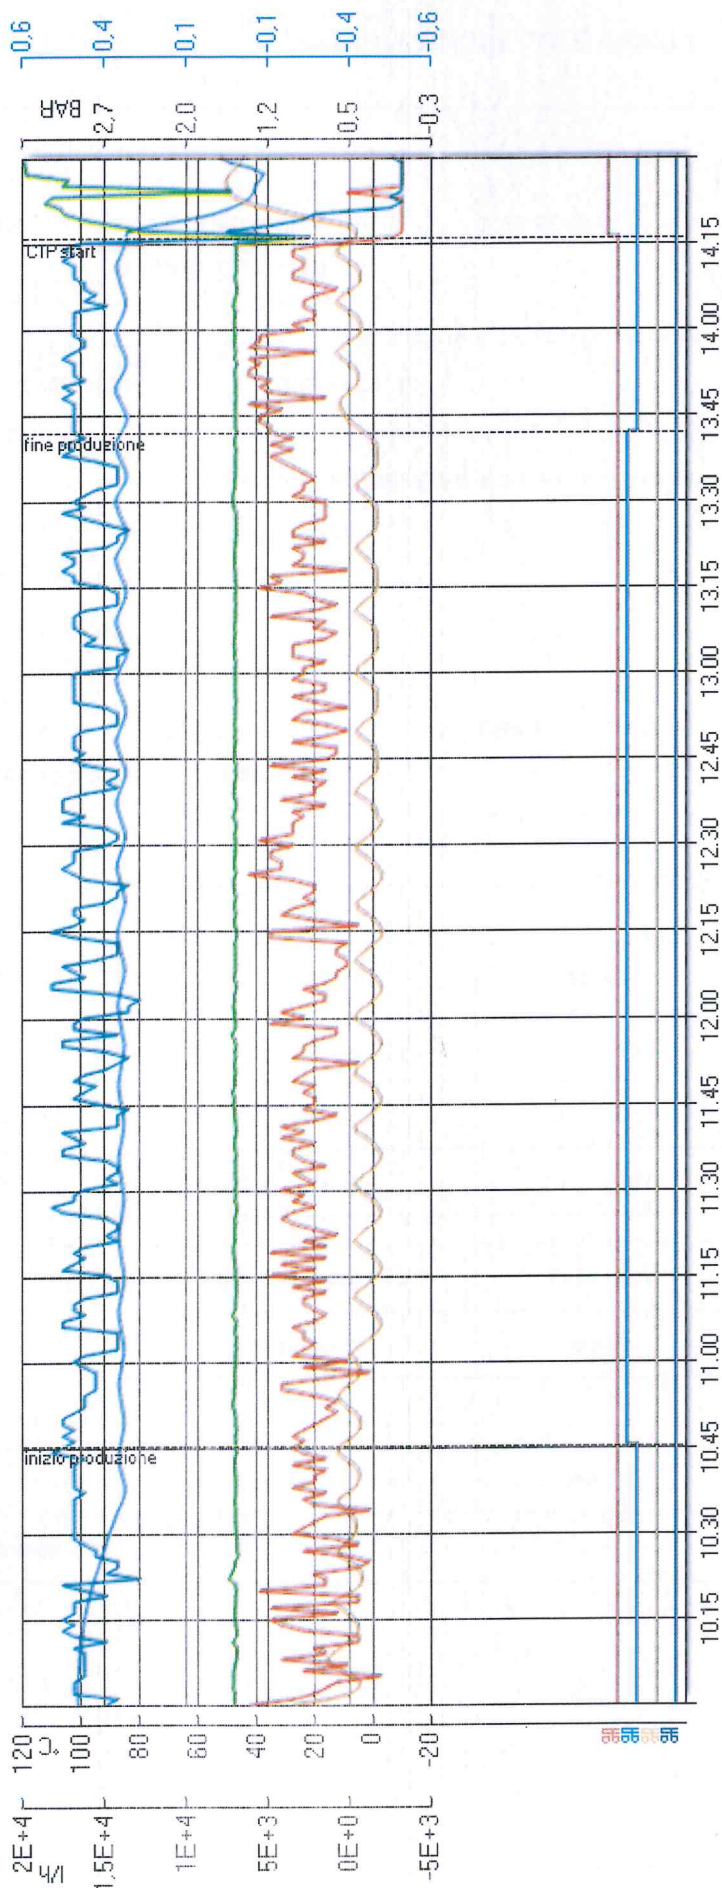

02/04/2024	
☒ REG-PST-TUB (REG-PST-TUB):	☒ REG-PST-TUB (REG-PST-TUB):
☒ TEMP.PAST-TIT (°C)	☒ TEMP.PAST-TIT (°C)
☒ REG-PST-TUB (REG-PST-TUB):	☒ REG-PST-TUB (REG-PST-TUB):
☒ TEMP.USCITA-TST (°C)	☒ TEMP.USCITA-TST (°C)
☒ REG-PST-TUB (REG-PST-TUB):	☒ REG-PST-TUB (REG-PST-TUB):
☒ P3T-P4T (BAR)	☒ P3T-P4T (BAR)
☒ REG-PST-TUB (REG-PST-TUB):	☒ REG-PST-TUB (REG-PST-TUB):
☒ P3T-P2T (BAR)	☒ P3T-P2T (BAR)
☒ REG-PST-TUB (REG-PST-TUB):	☒ REG-PST-TUB (REG-PST-TUB):
☒ PORTATA (m³/h)	☒ PORTATA (m³/h)
☒ REG-PST-TUB (REG-PST-TUB):	☒ REG-PST-TUB (REG-PST-TUB):
☒ Low TIT steriliz	☒ Low TIT steriliz

Tavola di corrispondenza

Noi REDA S.p.A.
Via Piave, 9
36033 Isola Vicentina (VI)

dichiariamo che:

le soste relative all'impianto "Pastorizzatore Tubolare 7.000 l/h succhi di agrumi" con numero di serie 3075/06 sono:

- **SOSTA A:** Lunga 4,10 mt. Con tubazioni aventi Ø interno 67mm., il volume totale è pari a **14,5 litri**.
Il volume calcolato è $(7000 \text{ l/h} / 3600 \text{ sec}) * 6 \text{ sec.} = \textbf{11,66 litri}$
- **SOSTA B:** Lunga 4,06 mt. Con tubazioni aventi Ø interno 67mm., il volume totale è pari a **14,3 litri**.
Il volume calcolato è $(7000 \text{ l/h} / 3600 \text{ sec}) * 6 \text{ sec.} = \textbf{11,66 litri}$

1. Sosta A = 6 secondi.
2. Sosta A+B = 12 secondi.

Le lunghezze delle soste sono state misurate realmente sull'impianto.

LUOGO E DATA:	RAPPRESENTANTE LEGALE:
<u>Isola Vicentina, 17/02/2015</u>	<u>Rag. Frigo Giorgio</u>

FDA Recommended Pasteurization Time/Temperatures

For apple juice at pH values of 4.0 or less, FDA recommends the following thermal processes to achieve a 5-log reduction for oocysts of *Cryptosporidium parvum*. Because this parasite is believed to be more heat resistant than *E. coli* O157:H7, these parameters will also control bacterial pathogens.

160 degrees F for at least 6 seconds
 165 degrees F for at least 2.8 seconds,
 170 degrees F for at least 1.3 seconds,
 175 degrees F for at least 0.6 seconds, or
 180 degrees F for at least 0.3 seconds

71.7 degrees C (161 degrees F) for 15 seconds (milk pasteurization) is also considered adequate.

Remember to set your Operational Limit higher to assure you meet your Critical Limit!

The complete section on validation of pasteurization treatments for juice is excerpted below from the Juice Hazards Guide

5.2 Validated Pasteurization Treatments for Juice

At this time there are some published studies on pasteurization processes for controlling pathogens in juice that we can comment on to assist you in developing your HACCP plan.

Study #1 Summary: A study done by the NFPA (7) has resulted in a recommended general thermal process of 3 seconds at 71.1 degrees C (160 degrees F), for achieving a 5-log reduction for *E. coli* O157:H7, *Salmonella*, and *Listeria monocytogenes* in fruit juices. The efficacy of this process was measured using single strength apple, orange, and white grape juices adjusted to a pH of 3.9. The authors noted that a pH in the range of 3.6 to 4.0 has been reported as a non-significant variable in the heat resistance of *E. coli* O157:H7. The authors also noted that the heat resistance of these vegetative bacterial pathogens might be considerably greater at pH values of 4.0 and higher. This process assumes that the pathogens will have increased thermal resistance due to their being acid-adapted.

Study #2 Summary: A study done at the University of Wisconsin (8) has shown that treatments of 68.1 degrees C (155 degrees F) for 14 seconds (recommended treatment conditions in Wisconsin) and 71.1 degrees C (160 degrees F) for 6 seconds (recommended treatment conditions in New York) are capable of achieving a 5-log reduction of acid adapted *E. coli* O157:H7 in apple cider (pH values of 3.3 and 4.1). The Wisconsin study also confirmed the adequacy of the treatment conditions of the NFPA study (71.1 degrees C (160 degrees F) for 3 seconds) for achieving a 5-log reduction for *E. coli* O157:H7 in apple cider.

FDA Comments/Recommendations: We believe that the process recommended in the NFPA study is adequate to ensure a 5-log reduction of the three stated vegetative bacterial pathogens, (*E. coli* O157:H7, *Salmonella* and *Listeria monocytogenes*) at juice pH values comparable to those in the study. However, other validation studies may be needed for juices that have pH values greater than 4.0. We also believe that either of the processes evaluated in the University of Wisconsin study is adequate to ensure a 5-log reduction of the three stated bacterial pathogens, (*E. coli* O157:H7, *Salmonella*, and *Listeria monocytogenes*) (at juice pH values comparable to those in the study) if any of these pathogens are the pertinent microorganism in your juice.

Neither of these two studies evaluated thermal processes for achieving a 5-log reduction for oocysts of the protozoan parasite *Cryptosporidium parvum* that has been a cause of illness outbreaks associated with the consumption of apple juice. In fact, the thermal destruction of *Cryptosporidium parvum* oocysts has not been as widely studied in the published literature as it has for the vegetative bacterial pathogens; however, the available scientific literature suggests that *Cryptosporidium parvum* (9) oocysts may be more resistant to thermal processing than the three vegetative bacterial pathogens. Therefore, we recommend that you consider *Cryptosporidium parvum* to be the pertinent microorganism when you are establishing a HACCP plan for apple juice.

For apple juice at pH values of 4.0 or less, we are recommending the following thermal processes to achieve a 5-log reduction for oocysts of *Cryptosporidium parvum* (in addition to the three aforementioned vegetative bacterial pathogens) based upon a conservative evaluation of the available scientific data;

160 degrees F for 6 seconds (recommended treatment conditions in New York),
165 degrees F for 2.8 seconds,
170 degrees F for 1.3 seconds,
175 degrees F for 0.6 seconds, or
180 degrees F for 0.3 seconds

Also, while it appears that *Cryptosporidium parvum* may be more resistant to thermal processing than the vegetative bacterial pathogens noted, in view of the limited data on the thermal destruction of *Cryptosporidium parvum*, processors may designate both *E. coli* O157:H7 and *Cryptosporidium parvum* as the pertinent microorganism in their HACCP plans for apple juice, and use one of the recommended thermal processes given above for the a 5-log reduction of *Cryptosporidium parvum* oocysts, until more definitive data become available on the relative resistance to thermal processing of these two pathogens.

We also believe that the process that is typically carried out for milk pasteurization, 71.7 degrees C (161 degrees F) for 15 seconds, is adequate to achieve a 5-log reduction of oocysts of *Cryptosporidium parvum* and the aforementioned three vegetative bacterial pathogens when this process is used for apple juice (at juice pH values of 4.0 or less).