


PART, NO-

2		
1		
NO MODIFICATION		

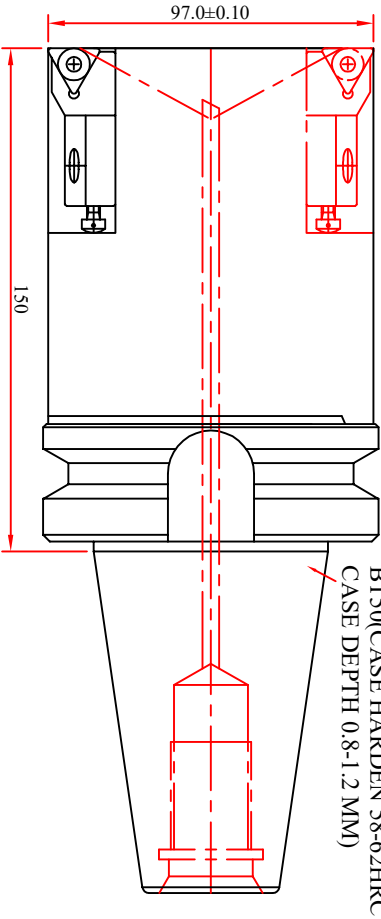

DESCRIPTION:-SPL ROUGHING BORING BAR OF DIA 97.0,GPL-150.0,BT-50

THROUGH COOLANT

NOTES:-

- 1) DIMN. TOLERANCE ON FIX POKETE ± 0.05
- 2) THROUGH COOLENT IS PROVIDED.
- 3) BORING BAR WILL BE BALANCED AT 3000 RPM WITHIN 2.5 mg.

3		0
2	VC	0
1	0	

SR NO		DESCRIPTION	QTY	AK TOOLINGS			
6				CUSTOMER		KASTURY ASHT	
5				SHIPMENT &-BILL		HARIOM	
4	-		0	DRG. NO. AK/DRG/09431			
3	-		0				
2	CARTRIDGE - STFCR 12CA16	02					
1	INSERT- TCM1T 16T308	02		DESCRIPTION:-SPL ROUGHING BORING BAR OF DIA 97.0,GPL-150,BT-			
DRAWN		M/K	PO NO.	—			
CHD.BY.			DATE	17/03/2024			

SR NO	DESCRIPTION	QTY	UNIT	AMOUNT
1	PRODUCTION OF AN AUTODESK EDUCATIONAL PRODUCT	1	UNIT	1000000