


**PART, NO-**

2		
1		
NO MODIFICATION		

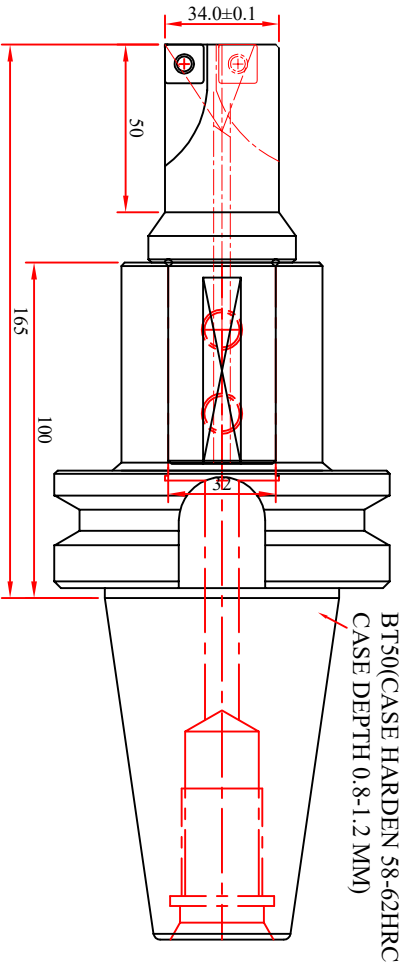


DESCRIPTION:-SPL SPOT FACE OF DIA 34.0X60 FL,GPL-165.0,BT-50,SLA-32

THROUGH COOLANT

NOTES:-

- 1) DIM. TOLERANCE ON FIX POKETE  $\pm 0.05$
- 2) THROUGH COOLENT IS PROVIDED.
- 3) BORING BAR WILL BE BALANCED AT 3000 RPM WITHIN 2.5 mg.

3		0
2	VC	0
1	0	

SR NO					DESCRIPTION					QTY														
1					INSERT- SPMG 110408					02														
2																								
3					-																			
4					-																			
5																								
6																								
AK TOOLINGS																								
DRG. NO. AK/DRG/09427										CUSTOMER					KASTURY,ASHI									
										SHIPMENT &-BILL					HARIOM									
DESCRIPTION:-SPL SPOT FACE OF DIA 34.0X60 FL,GPL-165.0,BT-50,SL.																								
					DRAWN					M.K					PO NO.					—				
					CHD.BY.										DATE					17/03/2024				

# AK TOOLINGS

CUSTOMER	KASTURY, ASHT
SHIPMENT &-BILL	HARIOM

**DRG. NO. AK/DRG/09427**

DESCRIPTION:-SPL SPOT FACE OF DIA 34.0X60 FL,GPL-165.0,BT-50,SL.

1 INSERT-SPMG 110408

02

SR NO.

## DESCRIPTION

OTY

**DRAWN**  
**CHD.BY.**

M.K

PO NO.	DATE
--------	------

17/03/2024