


PART, NO-

2		
1		
NO MODIFICATION	DATE	SIGN.

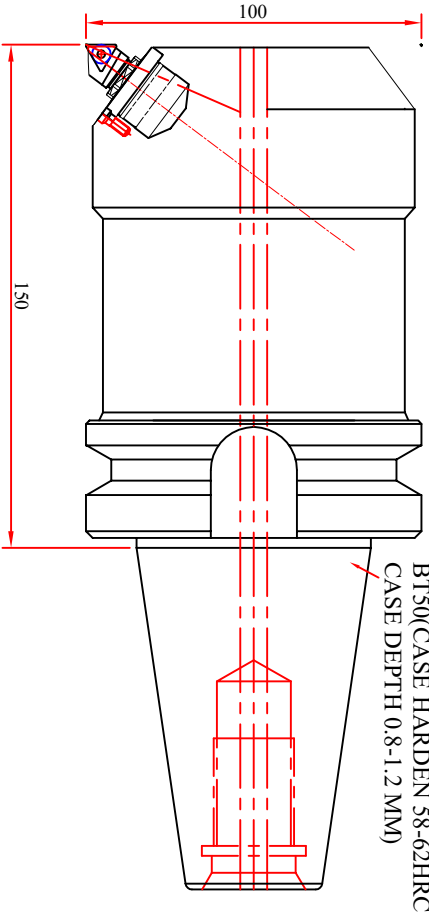


DESCRIPTION: SPL FINISH BORING BAR OF DIA Ø100.0, GPL-150.0, BT-50, WITHOUT, M.B.U.

THROUGH COOLANT

NOTES:-

- 1) DIMN. TOLERANCE ON FIX POCKETE ± 0.05
- 2) THROUGH COOLENT IS PROVIDED.
- 3) BORING BAR WILL BE BALANCED AT 3000 RPM WITHIN 2.5 mg.

3		0
2	VC	0
1	0	

SR.NO		DESCRIPTION		QTY
6				
5				
4				
3				
2	M.B.U - FLTA 1102			01
1	INSERT-TCMT 110204			02
				
DRAWN		CHKD.BY.	DATE	
M.K		PO NO.	—	
DESCRIPTION: SPL FINISH BORING BAR OF DIA Ø100.0, GPL 150.0, BT-5				
DRG. NO. AK/DRG/09433				
AK TOOLINGS			CUSTOMER	KASTURY ASHT
			SHIPMENT &-BILL	HARIOM

SR NO	DESCRIPTION	QTY
	PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT	