

ROTARY TRAY SEALER

ROTA – 3525 - MAP



Benefits

- Easy to operate.
- Accurate & variable temperature Control.
- Automatic film roll winding.
- Application customised models can also be offered.


Features

- Specially designed for Modified Atmosphere Packaging
- Easy operation via touch screen
- Quick tool change
- Standard two rotary working station
- Stainless steel & Aluminium casing.
- Integrated 2 / 3 gas mixer (optional)
- Integrated Vacuum operation (optional)

Semi automated tray sealer for Modified Atmosphere Packaging

The two station rotary tray sealers are specially designed for Modified Atmosphere Packaging. Simple interfacing, control parameters, Easy tool changing makes operation more easier.

Customisable tray formats

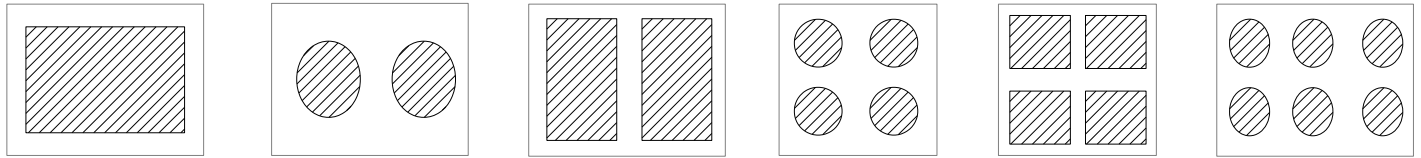

Maximum tray size : 36 x 27 cm

Technical Specifications

Technical Specifications	
Working Station	2 Working station
Type	Rotary Tray Sealer
Output Capability	2 – 6 cycles per minute (Depending upon flushing, sealing and vacuum time)
Tray Dimensions	Customisable
Temperature	Min 180° C to 220° C
Power Supply	220 V AC SINGLE PHASE / 440 V AC Three phase
Dimension (L x W x H) (mm)	Approximately (1155 x 1020 x 1440) mm
Machine Weight	Approximately 200 kg
Optional Features	
Built-in Gas Mixer	3 Gas Mixer / 2 Gas Mixer / Block Gas Mixer
Built-in Vacuum	Depending upon the customer requirements
Optional Features (Built-in digital 2 / 3 gas mixer)	
Inlet Pressure	8 – 10 bar
Accuracy	+ / - 2 % abs
Output Flow Rate	150 litres / min
Optional Features (Built-in block 2 / 3 gas mixer)	
Inlet Pressure	4 – 10 bar
Mixer Configuration	Preset mix of 2 or 3 gases
Accuracy	+ / - 2 % abs
Output Flow Rate	100 - 450 litres / min (flow proportional to inlet pressure)

ET – RTS – 2020 – 07

Specifications subject to change without prior notice



Elixir Technologies
300/2 Chamundeshwari Layout,
Doddabommasandra Main Road,
Vidyaranya, Bengaluru -560097.

+91 080 2345 6254 / 55 / 56
sales@elixirtechnologies.in
foodscience.elixir@gmail.com
www.modifiedatmospherepackaging.in