




AMB82 - PINOUT

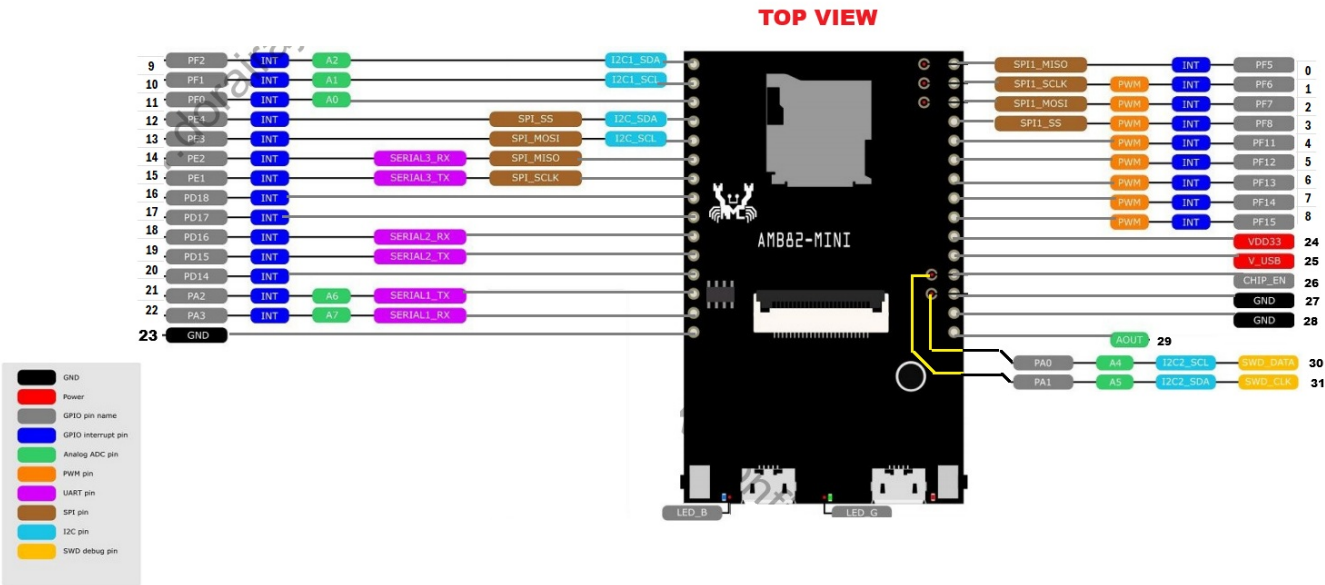


**Tx AND Rx Twisted !**

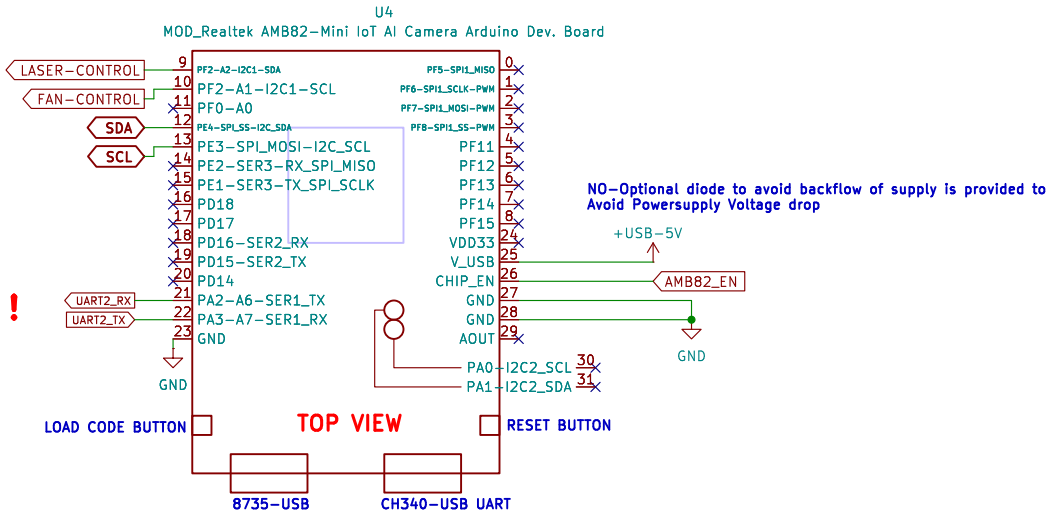


FAN CONTROL

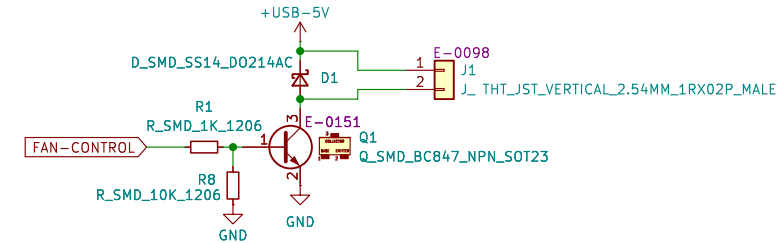


LASER CONTROL

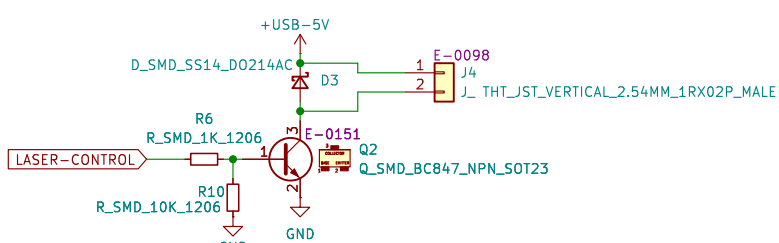


PIXTONE-I2C-CONTROL

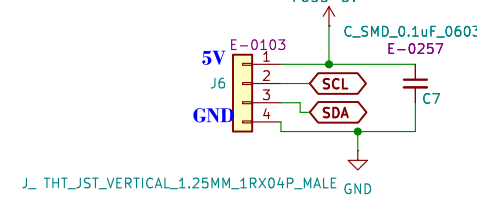


AMB82-ENABLE-DISABLE

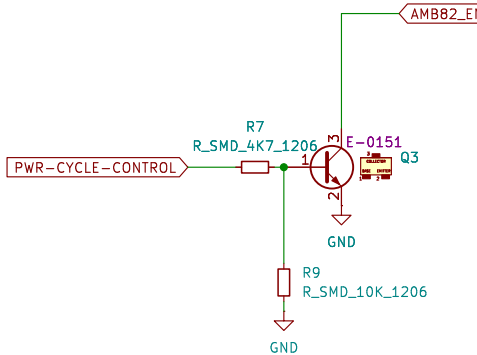

ONLY FOR POWER

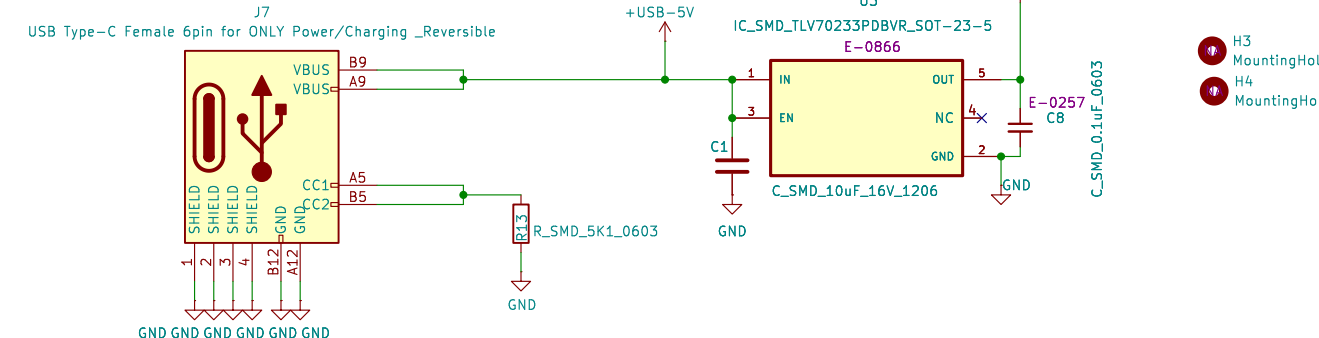

LoRA Radio

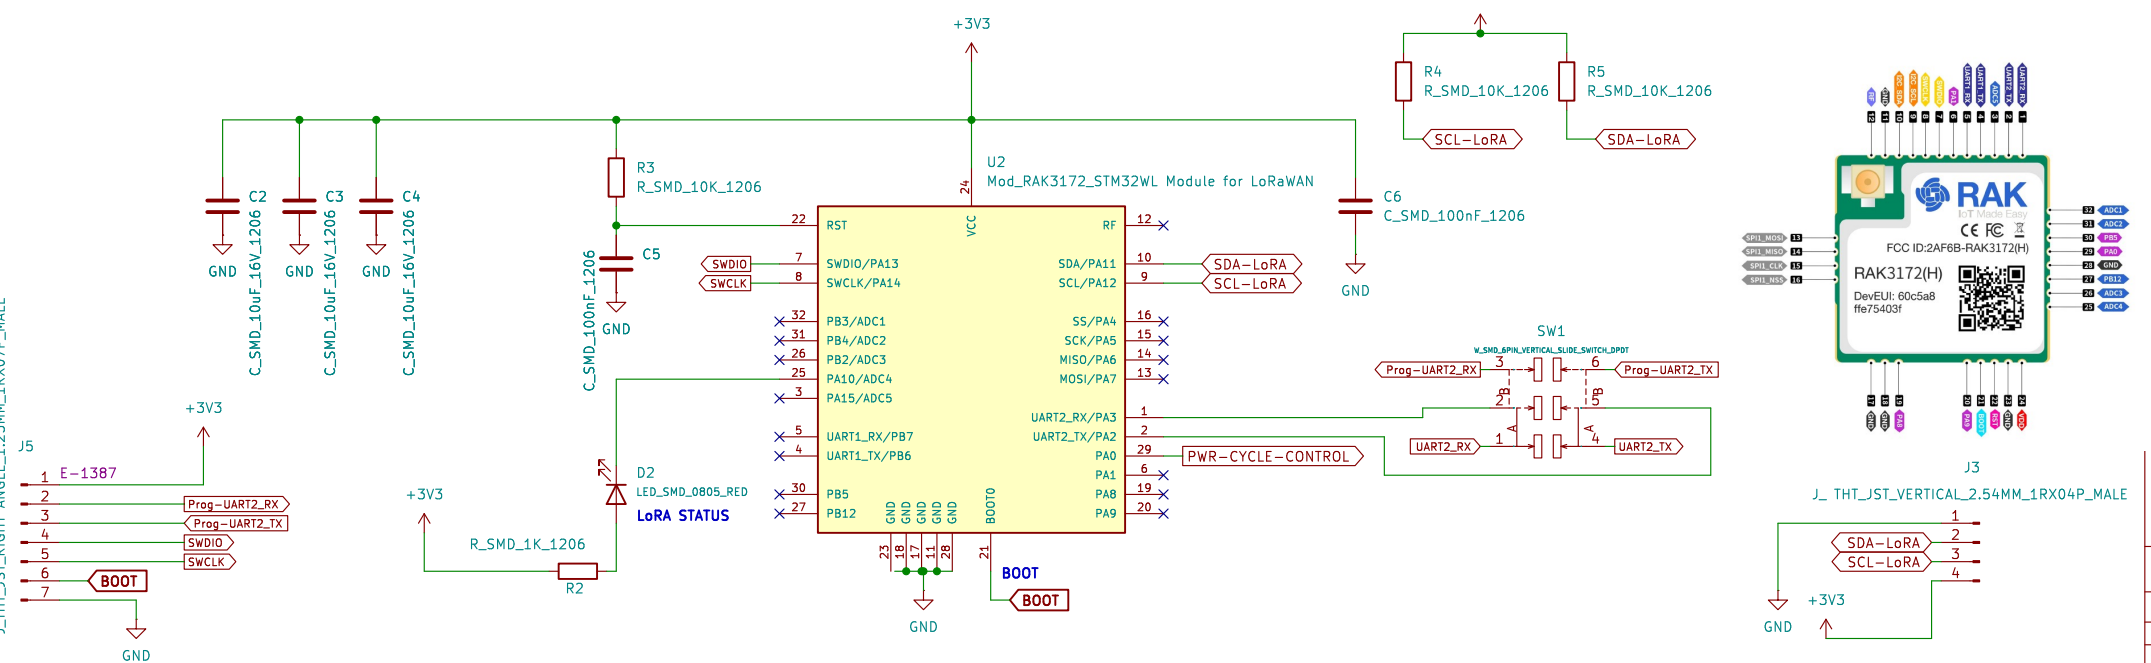

Note: Changes from V1 to V2  
1.U1 V\_USB, CHIP\_EN & GND tracks to be corrected.  
2.FAN CONTROL 10K PULL DOWN RESISTOR AT R1  
3.LASER CONTROL 10K PULL DOWN RESISTOR AT R6  
4.POWER SECTION NET +5V & +USB-5V has to be same.  
5.ALL USBs AT ONE SIDE (BACK SIDE OF ENCLOSURE)  
6.Added DPDT Switch to isolate Lora Module for programming