Cisco Packet Tracer

File Edit Options View Tools Extensions Help

Logical Physical x: 1247, y: 185

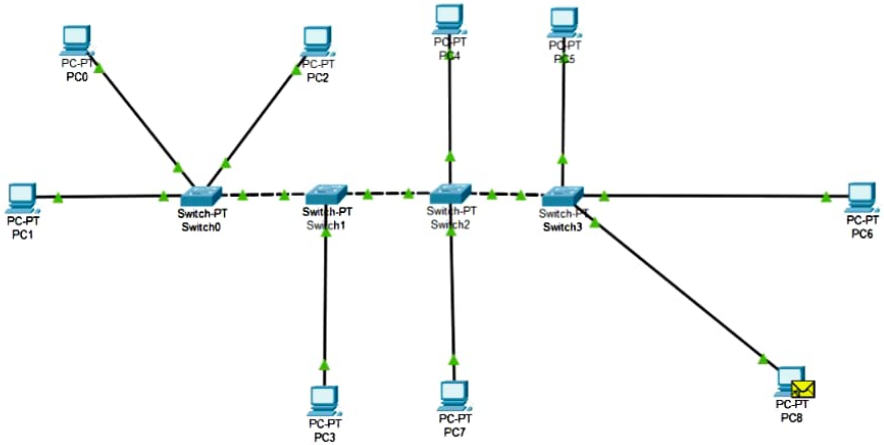

Simulation Panel

Event List

Vis	Time(sec)	Last Device	At Device	Type
	0.014	PC7	Switch2	ICMP
	0.014	Switch3	Switch2	ICMP
	0.014	Switch1	Switch2	ICMP
	0.015	Switch0	Switch1	ICMP
	0.016	Switch2	Switch1	ICMP
	0.017	Switch2	Switch3	ICMP
	0.017	Switch1	Switch2	ICMP
	0.017	--	Switch2	ICMP
	0.018	Switch1	Switch0	ICMP
	0.019	Switch2	Switch3	ICMP
	0.019	Switch3	PC8	ICMP
	0.019	--	Switch2	ICMP
	0.020	Switch0	PC1	ICMP
	0.021	Switch2	Switch3	ICMP
	0.021	Switch3	PC6	ICMP
Visible	0.023	Switch3	PC8	ICMP

Reset Simulation | Constant Delay | Captured to: 0.023 s

Play Controls

Event List Filters - Visible Events

ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, DHCP, DHCPv6, DNS, DTP, EAPOL, EIGRP, EIGRPv6, FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IPSec, ISAKMP, IoT TCP, LACP, LLDP, Meraki, NDP, NETFLOW, NTP, OSPF, OSPFv6, PAgP, POP3, PPP, PPPoED, PTP, RADIUS, REP, RIP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, TFTP, Telnet, UDP, USB, VTP

Edit Filters | Show All/None

Time: 00:13:28.324 PLAY CONTROLS: Event List Realtime Simulation

Automatically Choose Connection Type

Search

ENG IN 11:48 16-08-2023

PC0

ysical Config Desktop Programming Attributes

ommand Prompt

```
acket Tracer PC Command Line 1.0
:\>ping 11.10.11.1

inging 11.10.11.1 with 32 bytes of data:

eply from 11.10.11.1: bytes=32 time=5ms TTL=128
eply from 11.10.11.1: bytes=32 time=4ms TTL=128
eply from 11.10.11.1: bytes=32 time=6ms TTL=128
eply from 11.10.11.1: bytes=32 time=5ms TTL=128

ing statistics for 11.10.11.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
pproximate round trip times in milli-seconds:
    Minimum = 4ms, Maximum = 6ms, Average = 5ms

:\>ping 11.10.11.2

inging 11.10.11.2 with 32 bytes of data:

eply from 11.10.11.2: bytes=32 time=1ms TTL=128
eply from 11.10.11.2: bytes=32 time=2ms TTL=128
eply from 11.10.11.2: bytes=32 time<1ms TTL=128
eply from 11.10.11.2: bytes=32 time=1ms TTL=128

ing statistics for 11.10.11.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

op