

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 11.10.11.3

Pinging 11.10.11.3 with 32 bytes of data:

Reply from 11.10.11.3: bytes=32 time<1ms TTL=128
Reply from 11.10.11.3: bytes=32 time<1ms TTL=128
Reply from 11.10.11.3: bytes=32 time<1ms TTL=128
Reply from 11.10.11.3: bytes=32 time<1ms TTL=128

Ping statistics for 11.10.11.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>ping 11.10.11.2

Pinging 11.10.11.2 with 32 bytes of data:

Reply from 11.10.11.2: bytes=32 time<1ms TTL=128
Reply from 11.10.11.2: bytes=32 time<1ms TTL=128
Reply from 11.10.11.2: bytes=32 time<1ms TTL=128
Reply from 11.10.11.2: bytes=32 time<1ms TTL=128

Ping statistics for 11.10.11.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
```

☐ Top

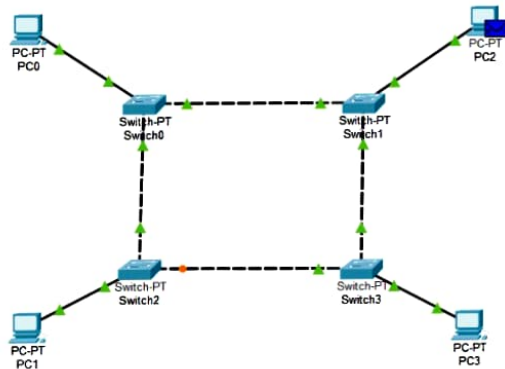

Simulation Panel

Event List

Vis	Time(sec)	Last Device	At Device	Type
	0.002	PC2	Switch1	ICMP
	0.002	-	PC2	ICMP
	0.004	PC2	Switch1	ICMP
	0.004	Switch1	Switch0	ICMP
	0.006	Switch1	Switch0	ICMP
	0.006	Switch0	PC0	ICMP
	0.008	Switch0	Switch2	ICMP
	0.009	PC0	Switch0	ICMP
	0.010	Switch2	PC1	ICMP
	0.011	Switch0	Switch1	ICMP
	0.011	PC1	Switch2	ICMP
	0.013	Switch1	PC2	ICMP
	0.013	Switch2	Switch0	ICMP
	0.015	Switch0	Switch1	ICMP
Visible	0.017	Switch1	PC2	ICMP
	1.957	-	Switch1	STP

Reset Simulation

☐ Constant DelayCaptured
1.96

Play Controls



Event List Filters - Visible Events

ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, DHCP, DHCPv6, DNS, D
 EAPOL, EIGRP, EIGRPv6, FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, IC
 ICMPv6, IPSec, ISAKMP, IoT, IoT TCP, LACP, LLDP, Meraki, NDP, NETFL
 NTP, OSPF, OSPFv6, PAgP, POP3, PPP, PPPoE, PTP, RADIUS, REP, R
 RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, T
 Telnet, UDP, USB, VTP

Edit Filters

Show All/None