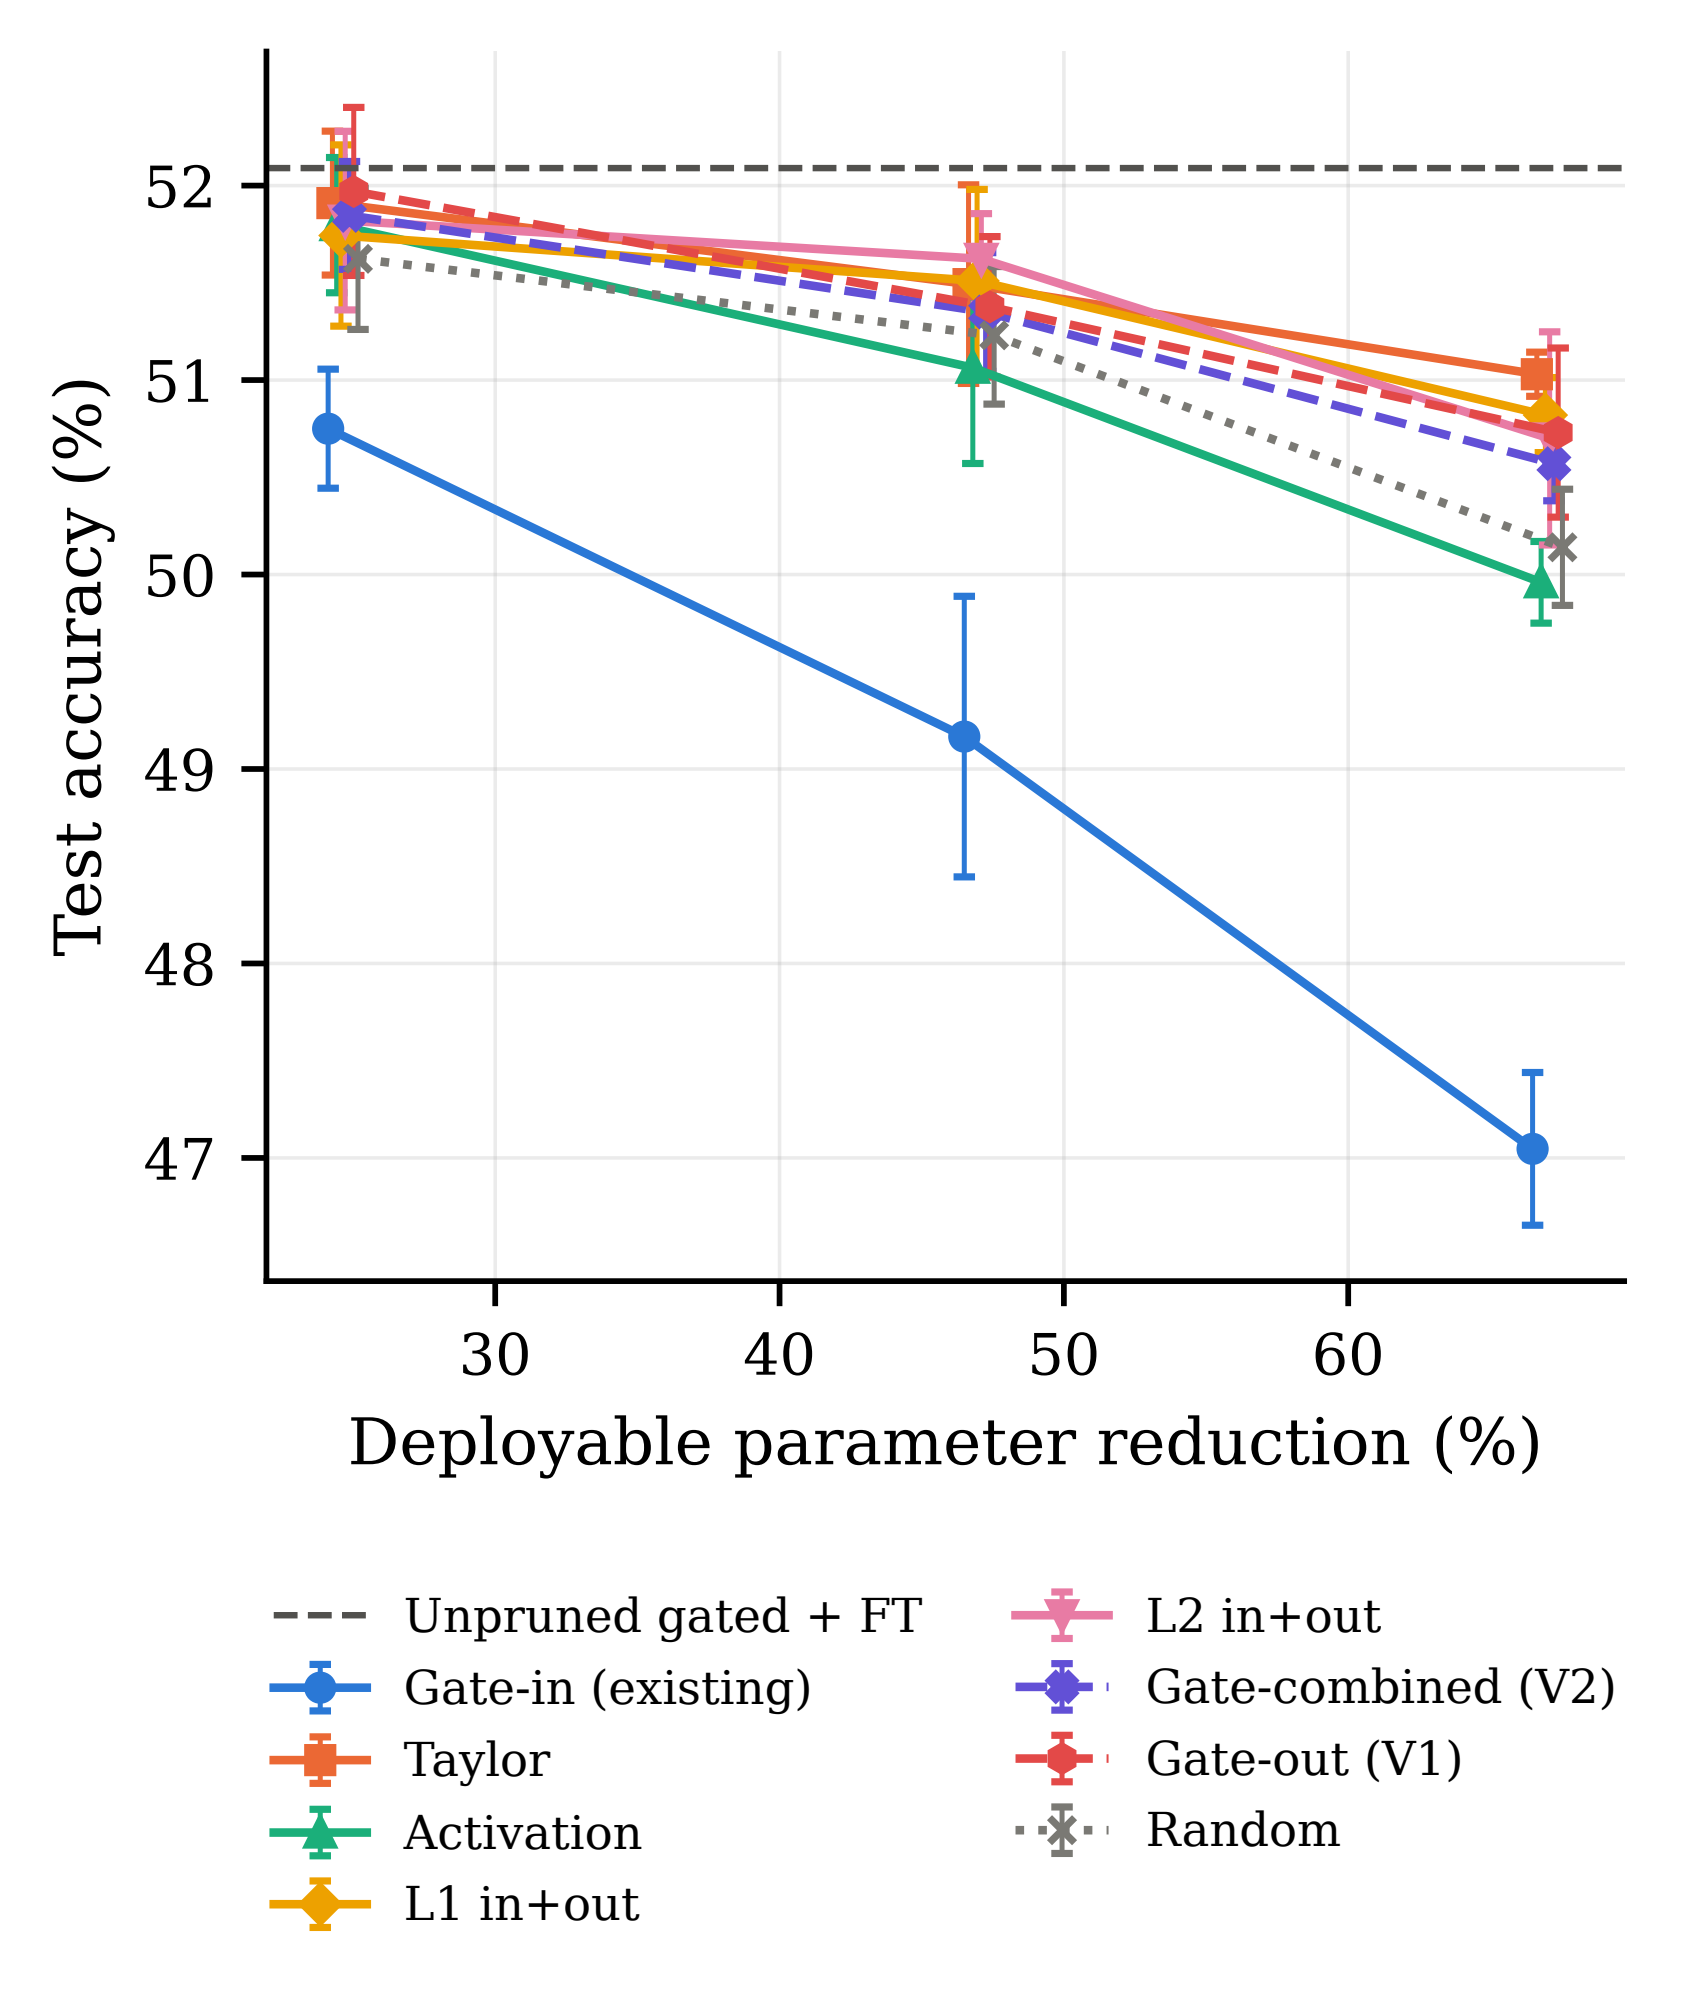
52
51
50
49
48
47
Test accuracy (%)
30
40
50
60
Deployable parameter reduction (%)
Unpruned gated + FT
Gate-in (existing)
Taylor
Activation
L1 in+out
L2 in+out
Gate-combined (V2)
Gate-out (V1)
Random