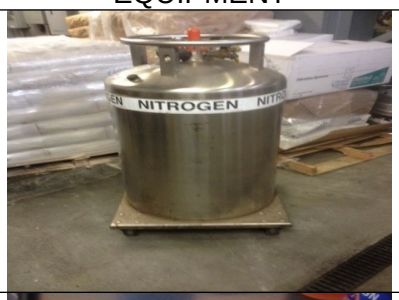
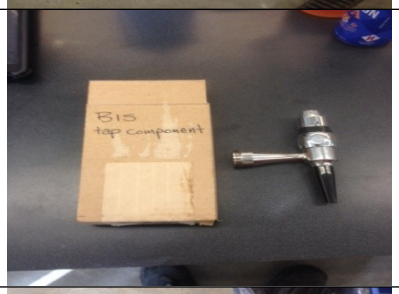
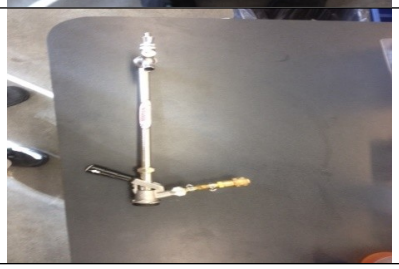
Equipment List:

EQUIPMENT	DESCRIPTION / LOCATION
	240L Dewar of Liquid Nitrogen. Usually located in its correct position for attachment(Near case packer on Can line side). If not, seek maintenance tech.
	This is a tap component for pouring nitrogenized beer, commonly referred to as a “Sparkler”. Usually located in Racker tool box.
	This is commonly referred to as a tap “tower”. You will need to install “Sparkler” as it is usually fitted with standard beer faucet attachment. Usually located in Lab.
	(Not Pictured) CBOXQC is the only instrument Harpoon owns capable of measuring nitrogen volumes in solution. Usually located in cellar on instrument rack in tunnel 1.

Document History and Approval:

Revise document history as described in the table and key below.

(Reference to following document: B1C.SOP.P001: Document Control and Approval Procedure Template)

VERSION NO.	VERSION DATE	DESCRIPTION OF CHANGE	AUTHOR NAME/PROJECT MANAGER
001			Kyle Szymanski
002	2026/10/26	Updated SOP to Newest Layout Version	Kyle Szymanski

Version Approval Number: 002

Approved by: Kyle Szymanski

Position Title: OSCI Manager

Date: 10/26/26