Automated Test Case Document

Jira Ticket: TEST2-90

Document Classification:	Company Confidential
Document Ref:	Automated Test Case Document
Version:	1.0
Date:	20/10/2026
Document Author:	Automated TEST2 Evidence Review
Document Owner:	Quality Assurance / Metricell

This document and its content is copyright of Metricell Limited @ 2026 all rights reserved. All information contained herein is the intellectual property of Metricell Limited and should be treated as confidential. Any external redistribution of reproduction of part or all of the contents in any form is prohibited unless expressly agreed with Metricell Limited in writing. Any reproduced content must include the following statement; "Part or all of the content contained herein is copyright of Metricell Limited @ 2026 all rights reserved".

Table of Contents

1 Revision History 2
2 Test Cycle Information 3
3 Test Summary 5
4 Test Cases 9
About Metricell 38

1 Revision History

Version	Date	Revision Author	Summary of Changes
[1.0]	20/10/2026	TEST2 QA Automation	Generated from TEST2 evidence review

2 Test Cycle Information

Tester:	**Automated**
Jira Ticket:	TEST2-90
Environment:	o2intelligence-v4-dev.metricell.com
Browser Details:	Google Chrome 155.0.8059.85
Date of Test:	20/10/2026
Limitations during Testing:	18 blocked; 0 inconclusive criterion(s). Reviewed attempt-002 against all 21 canonical criteria. Call points retrieval was reported to return HTTP 500, blocking data-dependent checks; the unavailable legacy configuration also blocks complete restoration verification. Direct screenshots support the selector/default and MOS legend-shape checks and contradict 5G NSA exclusion. Criterion 1: Selectable Call points could not be obtained. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 1: The first PNG save returned ENOENT because the screenshot directory did not exist; created the handoff screenshot directory and restarted this criterion at the launcher before capturing its initial state. Criterion 3: Metric-specific marker values/colours require returned Call points. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 4: No selected result or marker identities were available to compare across Colour By changes. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 5: No multi-call marker or per-metric valid-sample counts were available for the legacy calculations. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 6: Legend colours and descending thresholds were observed, but exact CSR boundary classification could not be exercised on returned data. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 6: Captured the final legend/map state and actual GIS URL; exact marker boundaries were blocked by the reproduced Call points failure. Criterion 7: All three MOS legends showed the required four colours and explicit intervals, including 4 ≤ MOS ≤ 5. Exact marker boundary classification was not testable without data. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 8: No result with missing MOS

	samples or out-of-band MOS values could be selected; unavailable/substitution behaviour was not testable. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 9: The visible CSR legend uses circles, triangles, diamonds and pentagons for the named generations, and a separate black-square No Service category. Mapping of actual generation-0 results and the fixed category definition was not independently established. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 9: Read the actual GIS URL; actual generation-0 data membership could not be established. Criterion 11: The complete assertion includes matching actual boundary behaviour, which requires data at the limits. That prerequisite was unavailable; fixed-definition editing and all legend limit behaviours were not exercised in this criterion. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 12: No Call markers were available to establish that legend edits update the matching points or remain specific across layer instances. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 14: Neither a single-result nor a multi-result Call marker could be selected. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 15: A populated Call cluster results table could not be opened, so required columns were not verified. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 16: No cluster table rows were obtainable to test sorting on each available column. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 17: No cluster row with a stable PointID was obtainable to test separate detail tabs and retained scope. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 18: No selected Call result with related service information could be obtained. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 20: No Call result with missing duration could be identified or selected to request its details. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Criterion 21: No selectable PointID or successful prior detail state was available to test stale data handling when point/service detail retrieval fails. GET /api/platform/automobile/call/points returned HTTP 500 on the initial Call load and again on a controlled fresh launcher-to-GIS load. This is an HTTP failure, not a settled empty result. No visible HTTP error banner was exposed. Call points, stable PointIDs and associated detail fixtures could not be obtained. Defects (No.) counts directly contradicted criteria, not unique Jira bugs; blockers and inconclusive evidence count as zero.
Overall review outcome:	Blocked
Browser URL(s) recorded after criteria:	https://o2intelligence-v4-dev.metricell.com/gis; https://o2intelligence-v4-dev.metricell.com/launcher

3 Test Summary

Area of test	Pass	Fail	Defects (No.)
1. With Automobile Call results available, selecting the Call layer displays the results as selectable map points.	N	N	0
2. The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.	Y	N	0
3. For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.	N	N	0
4. Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.	N	N	0
5. For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.	N	N	0
6. The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.	N	N	0

Metricell Limited © 2026 – Refer to Title Page
Commercial in Confidence

Area of test	Pass	Fail	Defects (No.)
7. Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.	N	N	0
8. When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.	N	N	0
9. The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.	N	N	0
10. The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.	Y	N	0
11. Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.	N	N	0
12. Editing a metric's customisable bands, labels, marker size, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.	N	N	0

Area of test	Pass	Fail	Defects (No.)
13. Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.	N	N	0
14. Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.	N	N	0
15. The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.	N	N	0
16. Each available column in the cluster results table can be sorted.	N	N	0
17. Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.	N	N	0
18. When a selected result has related service information, its Service Details tab can be opened.	N	N	0
19. Call technology legends and filters include 2G, 3G, 4G, and 5G SA and exclude 5G NSA.	N	Y	1
20. Requesting details for a selected result with no duration displays a clear no-data message.	N	N	0
21. When point or service details cannot be returned, the selected item does not show stale detail data.	N	N	0

4 Test Cases

Each test maps to a criterion and decisive browser evidence. Inconclusive results are reported as Failed.


4.1 Tests

Preconditions:	V4 access and ticket conditions.	***Associated Requirements:***	Ticket criteria below.	Automation Notes:	Screenshots below each criterion; full log retained locally.


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
1.0.0	With Automobile Call results available, selecting the Call layer displays the results as selectable map points.	With Automobile Call results available, selecting the Call layer displays the results as selectable map points.	criterion-1-after-select-call.png shows Call selected; criterion-1-after-add-call.png and criterion-1-final.png show its legend but no selectable Call points. Results report a repeated HTTP 500 from GET /api/platform/automobile/call/points; available Call data could not be obtained. The map does not establish a settled empty dataset. Evidence: E01, E02, E03, E04	Blocked



Criterion 1 evidence: With Automobile Call results available, selecting the Call layer displays the results as selectable map points.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E01 - Before select call (criterion-1-before-select-call.png)

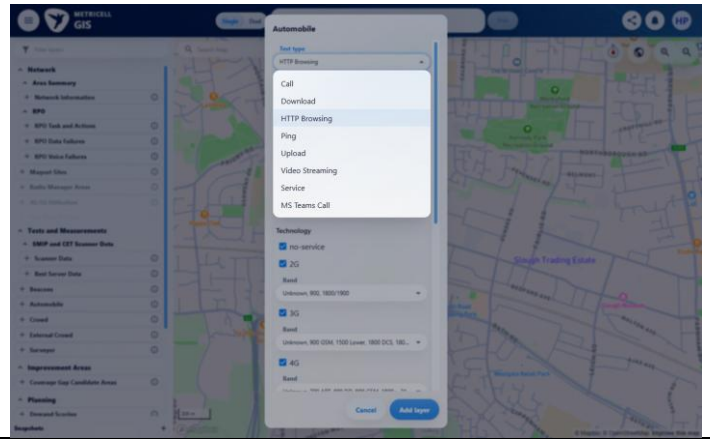

E02 - After select call (criterion-1-after-select-call.png)

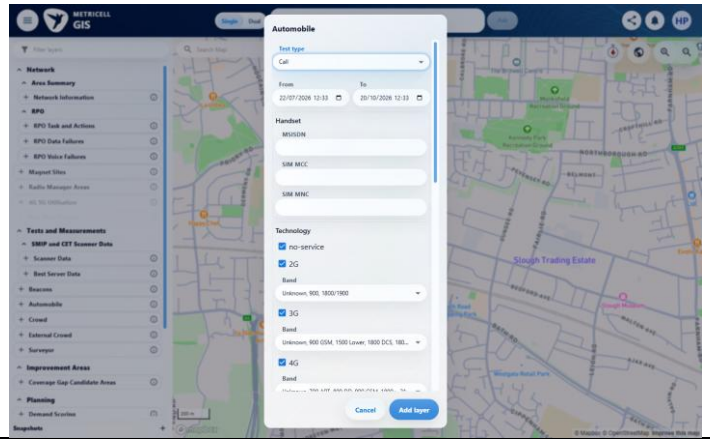


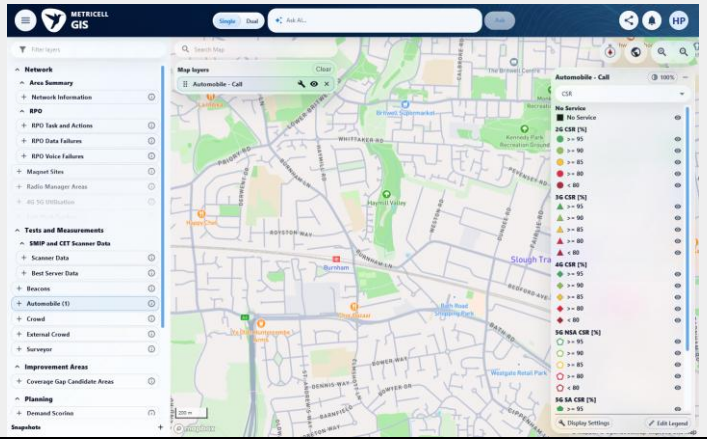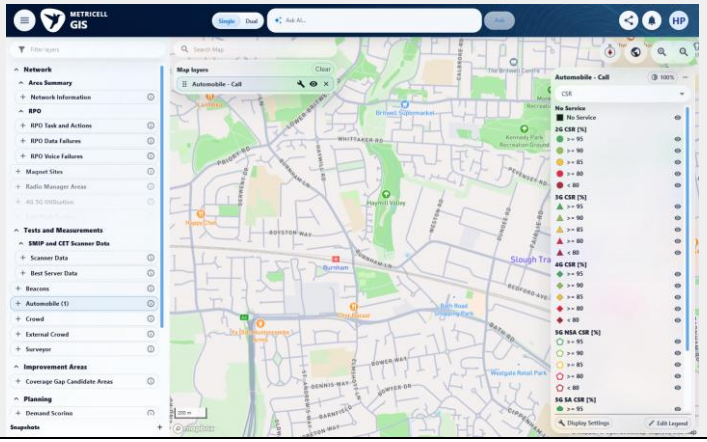ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 1 continued: With Automobile Call results available, selecting the Call layer displays the results as selectable map points. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E03 - After add call (criterion-1-after-add-call.png)**  **E04 - Final (criterion-1-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
2.0.0	The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.	The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.	criterion-2-after-reset-own-call-layer.png establishes removal of the prior layer; criterion-2-fresh-layer-dialog.png and criterion-2-after-fresh-call-choice.png show creation of a fresh Call layer. criterion-2-fresh-default-csr.png shows CSR before any metric selection, and criterion-2-final.png lists CSR, Downlink MOS, Uplink MOS and Estimated MOS. Evidence: E05, E06, E07, E08, E09, E03, E10	Passed





Criterion 2 evidence: The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E05 - Before reset own call layer (criterion-2-before-reset-own-call-layer.png)

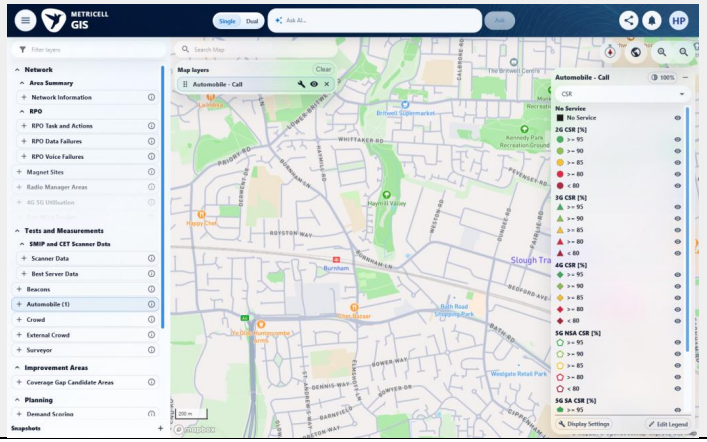


E06 - After reset own call layer (criterion-2-after-reset-own-call-layer.png)

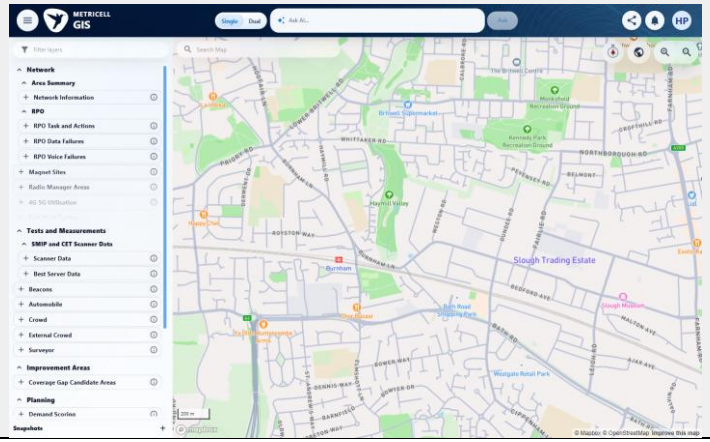

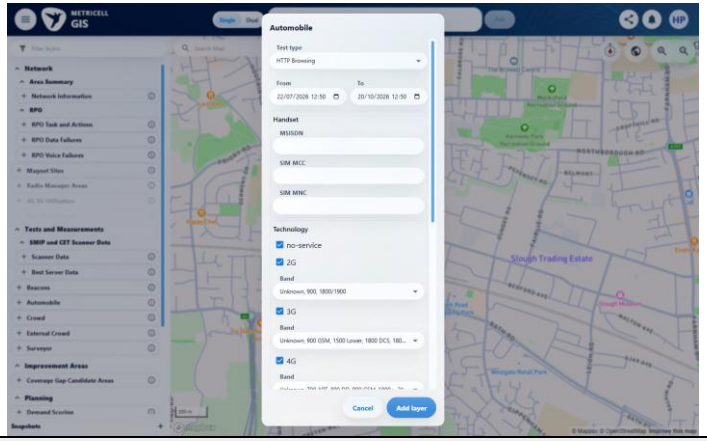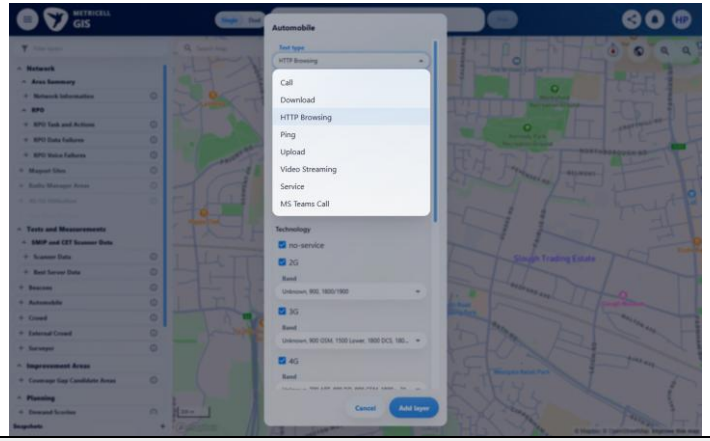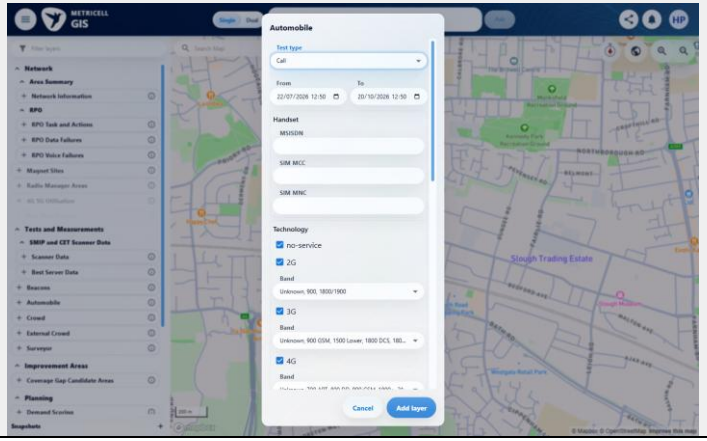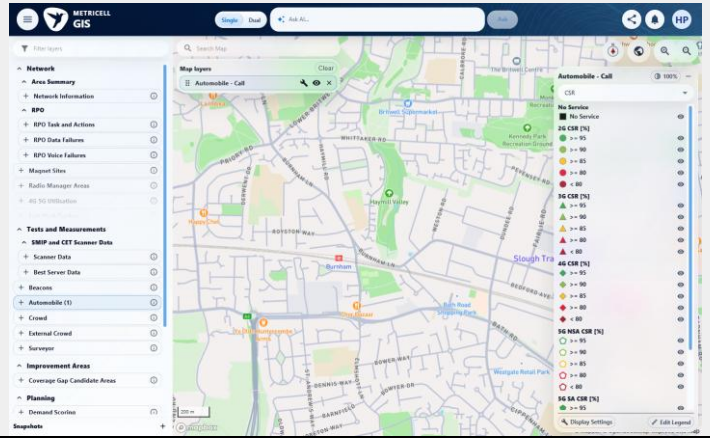ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 2 continued: The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E07 - Fresh layer dialog (criterion-2-fresh-layer-dialog.png)**  **E08 - Before fresh call choice (criterion-2-before-fresh-call-choice.png)** 				
Criterion 2 continued: The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E09 - After fresh call choice (criterion-2-after-fresh-call-choice.png)**  **E03 - Fresh default csr (criterion-2-fresh-default-csr.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 2 continued: The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E10 - Final (criterion-2-final.png)**				

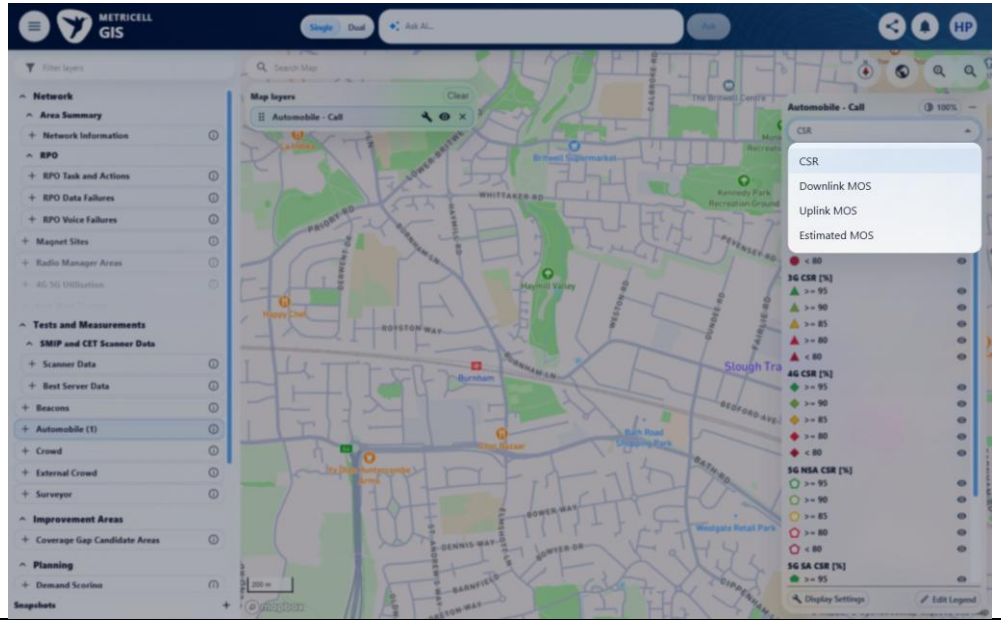


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
3.0.0	For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.	For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.	criterion-3-initial.png shows the launcher only. The reported Call points HTTP 500 prevented metric-specific marker comparisons; marker values, matching legend behaviour and units across all choices were not exercised. Evidence: E11	Blocked

Criterion 3 evidence: For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.

Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-3-initial.png)

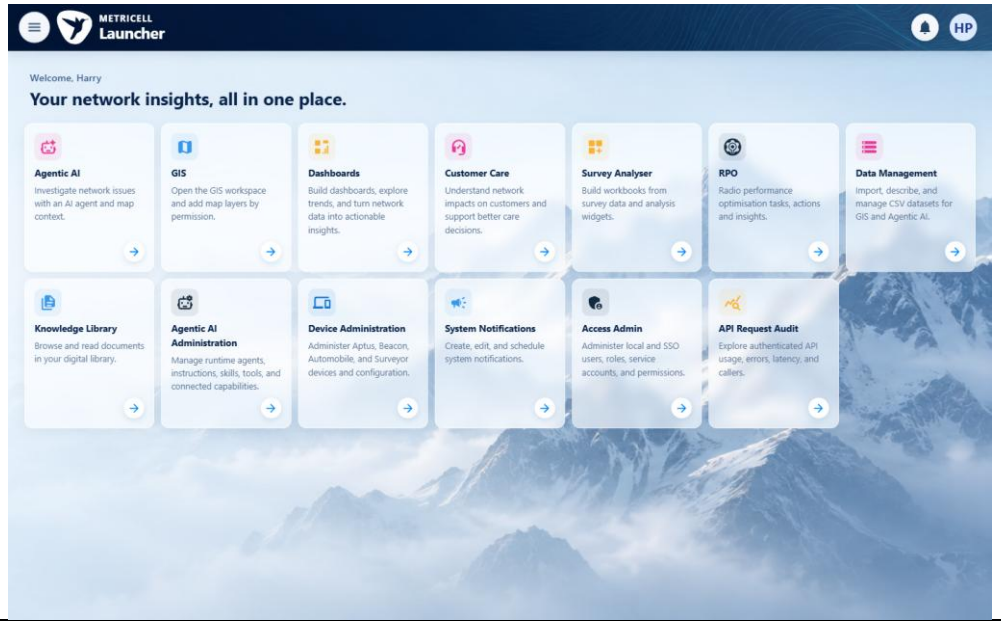

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
4.0.0	Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.	Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.	criterion-4-initial.png shows the launcher only. Call points retrieval was reported to fail with HTTP 500, leaving no marker identities or selected result for the required before/change/after preservation comparison. Evidence: E11	Blocked

Criterion 4 evidence: Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-4-initial.png)

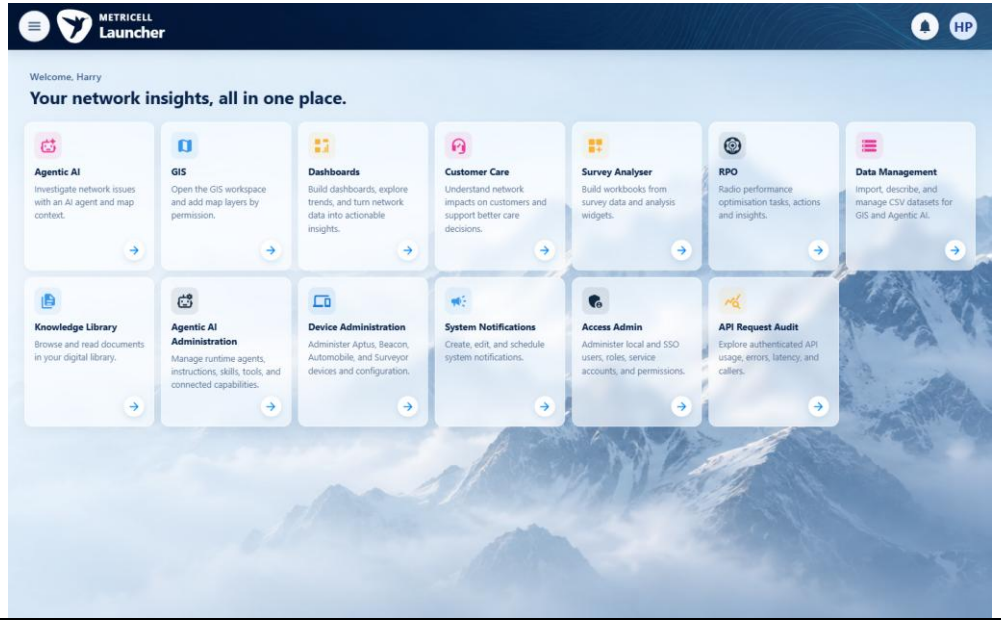

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
5.0.0	For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.	For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.	criterion-5-initial.png shows the launcher only. The reported Call points HTTP 500 prevented obtaining a multi-call marker, call outcome counts and separate MOS sample counts needed to verify the calculations and zero-denominator case. Evidence: E11	Blocked

Criterion 5 evidence: For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-5-initial.png)

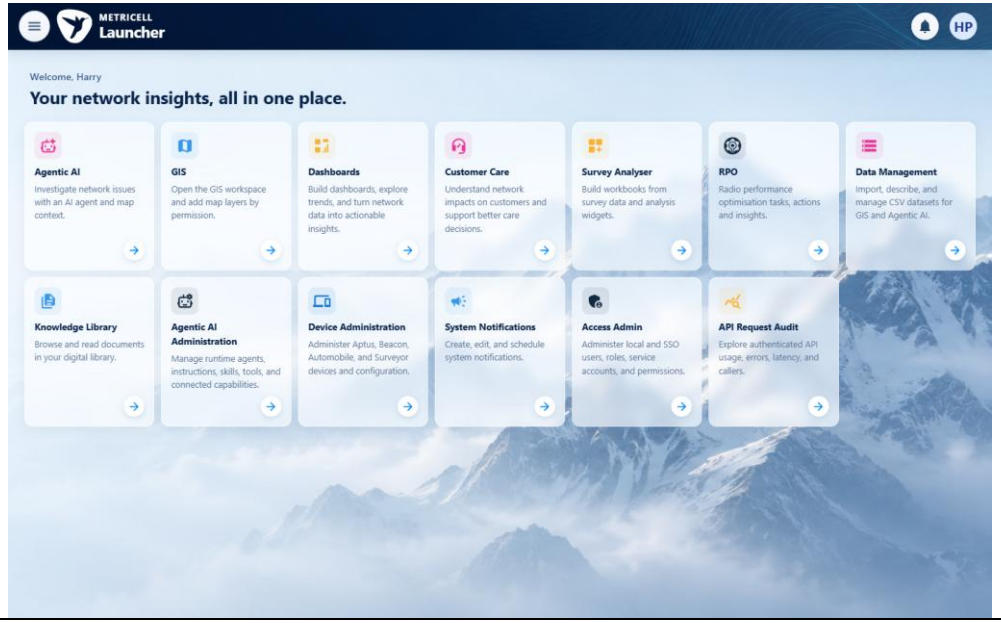

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
6.0.0	The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.	The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.	criterion-6-final.png shows descending CSR thresholds and the five visible band colours. The reported Call points HTTP 500 prevented exact-boundary marker checks; legend labels alone do not establish classification at the boundaries. Evidence: E05	Blocked

Criterion 6 evidence: The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E05 - Final (criterion-6-final.png)

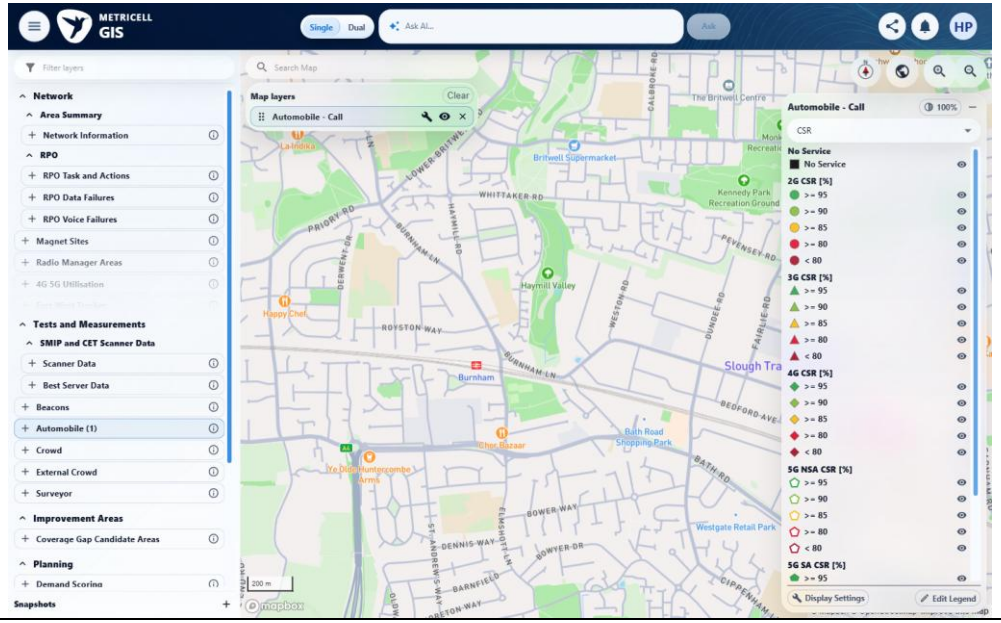


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
7.0.0	Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.	Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.	criterion-7-after-downlink-mos.png, criterion-7-after-uplink-mos.png and criterion-7-final.png show all three MOS legends with descending intervals, four colours and inclusive upper bound 5. Exact-boundary data classification remained blocked by the reported Call points HTTP 500. Evidence: E05, E12, E13, E14	Blocked


Criterion 7 evidence: Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.




Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E05 - Before downlink mos (criterion-7-before-downlink-mos.png)

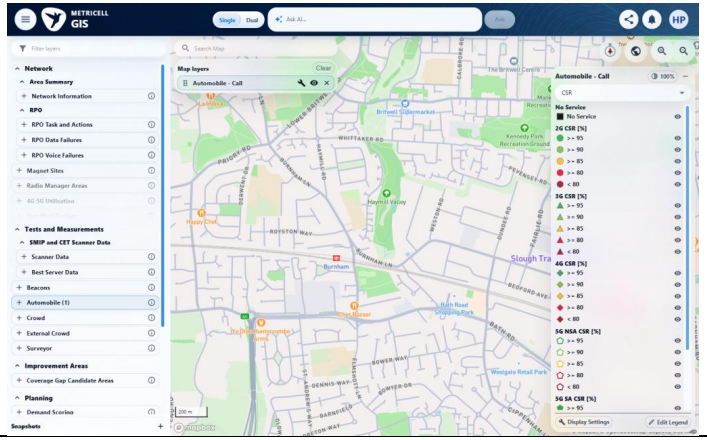

E12 - Before uplink mos (criterion-7-before-uplink-mos.png)

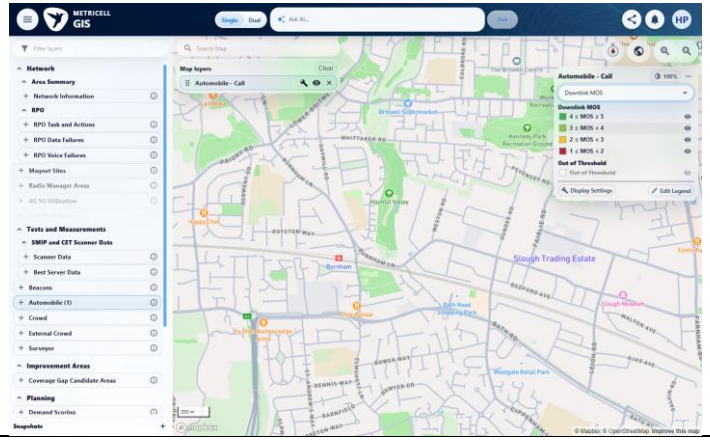


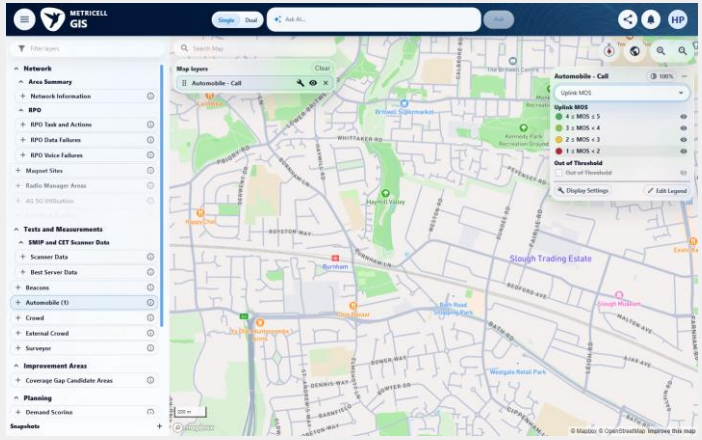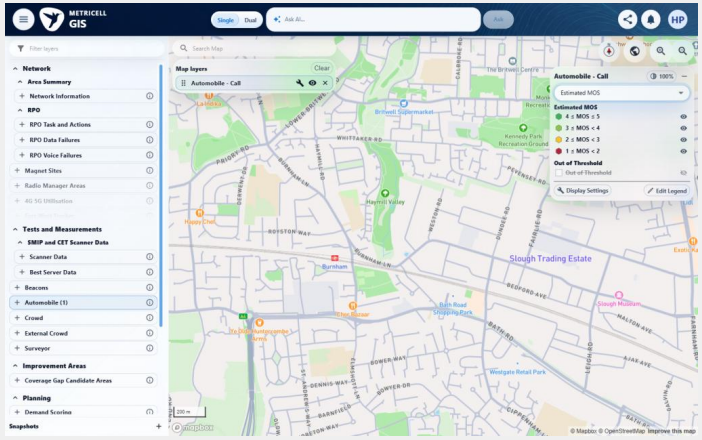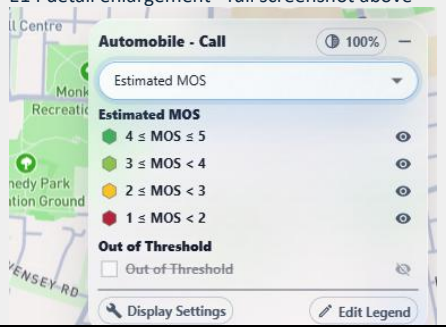ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 7 continued: Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E13 - Before estimated mos (criterion-7-before-estimated-mos.png)**  E13 detail enlargement - full screenshot above  	**E14 - Final (criterion-7-final.png)**  E14 detail enlargement - full screenshot above  			

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
8.0.0	When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.	When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.	criterion-8-initial.png shows the launcher only. The reported Call points HTTP 500 prevented selecting results with missing samples or out-of-band values, so unavailable values, substitution and category behaviour could not be checked. Evidence: E11	Blocked

Criterion 8 evidence: When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-8-initial.png)

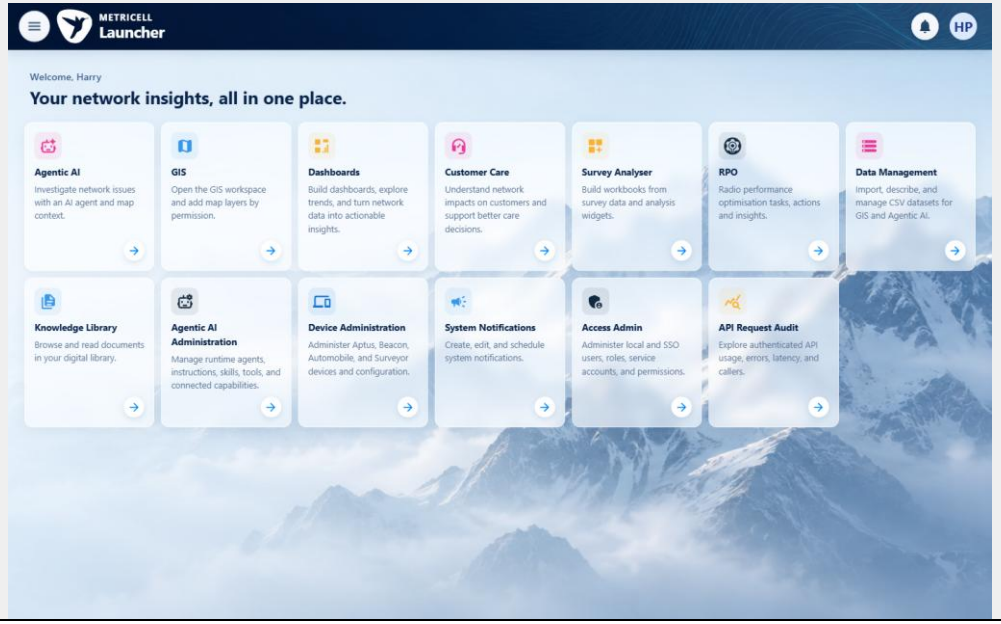


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
9.0.0	The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.	The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.	criterion-9-legend-top.png shows No Service separately with a black square, 2G circles, 3G triangles and 4G diamonds; criterion-9-final.png shows 5G SA pentagons. The reported Call points HTTP 500 prevented generation-0 data verification, and no category-edit sequence establishes immutability. Evidence: E05, E15	Blocked

Criterion 9 evidence: The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E05 - Legend top (criterion-9-legend-top.png)

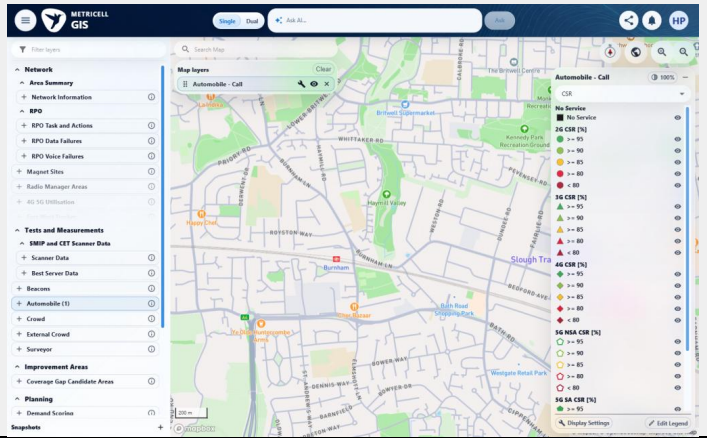


E15 - Final (criterion-9-final.png)

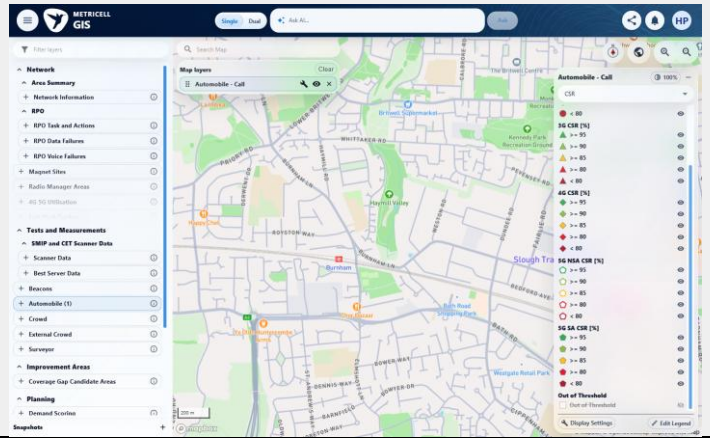


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
10.0.0	The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.	The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.	criterion-10-before-downlink-mos.png shows the CSR baseline. criterion-10-after-downlink-mos.png shows square Downlink bands, criterion-10-after-uplink-mos.png shows circular Uplink bands, and criterion-10-after-estimated-mos.png and criterion-10-final.png show hexagonal Estimated bands. Each selected metric has its own single metric heading rather than repeated generation groups. Evidence: E05, E16, E13, E17, E14	Passed



Criterion 10 evidence: The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis


E05 - Before downlink mos (criterion-10-before-downlink-mos.png)

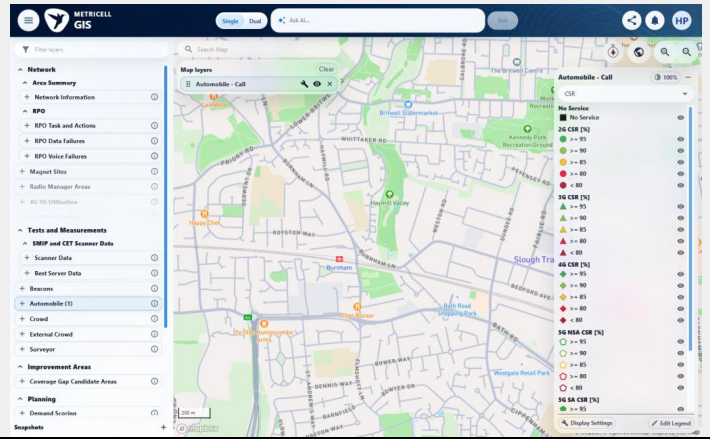

E16 - Before uplink mos (criterion-10-before-uplink-mos.png)

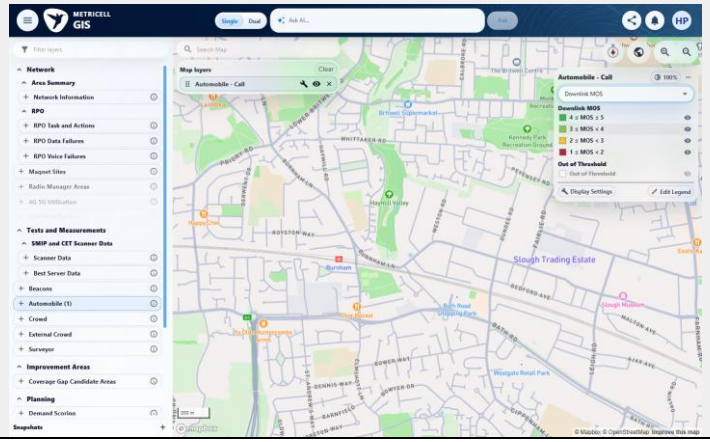

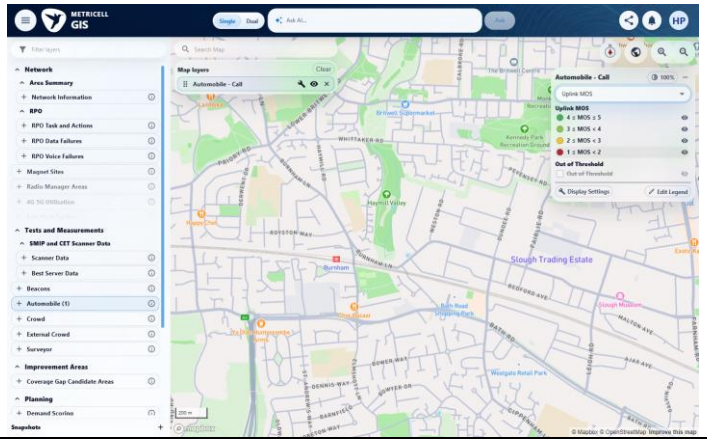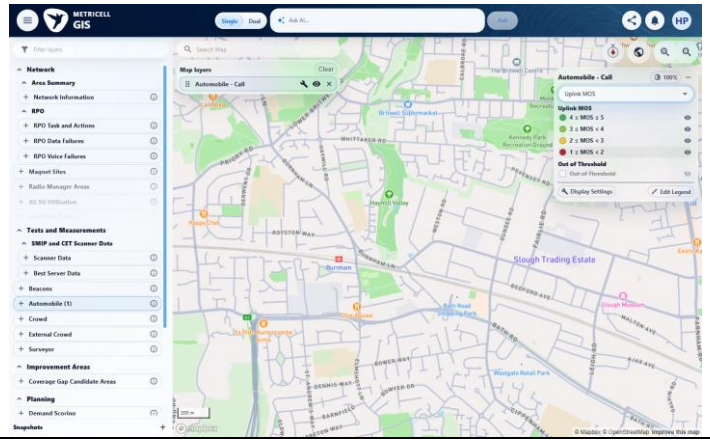
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 10 continued: The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E13 - After uplink mos (criterion-10-after-uplink-mos.png)**  **E17 - Before estimated mos (criterion-10-before-estimated-mos.png)** 				

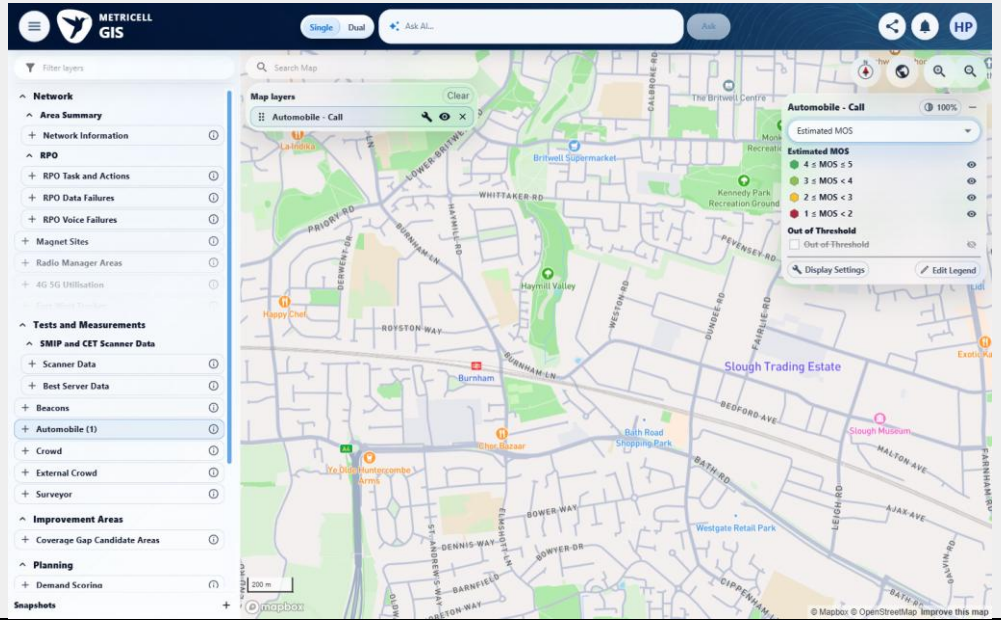ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 10 continued: The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E14 - Final (criterion-10-final.png)**				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
11.0.0	Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.	Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.	criterion-11-initial.png shows the launcher only. Fixed category definitions, default limits and label agreement with actual boundary classification were not exercised; boundary results were unavailable because Call points retrieval reportedly returned HTTP 500. Evidence: E11	Blocked

Criterion 11 evidence: Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-11-initial.png)

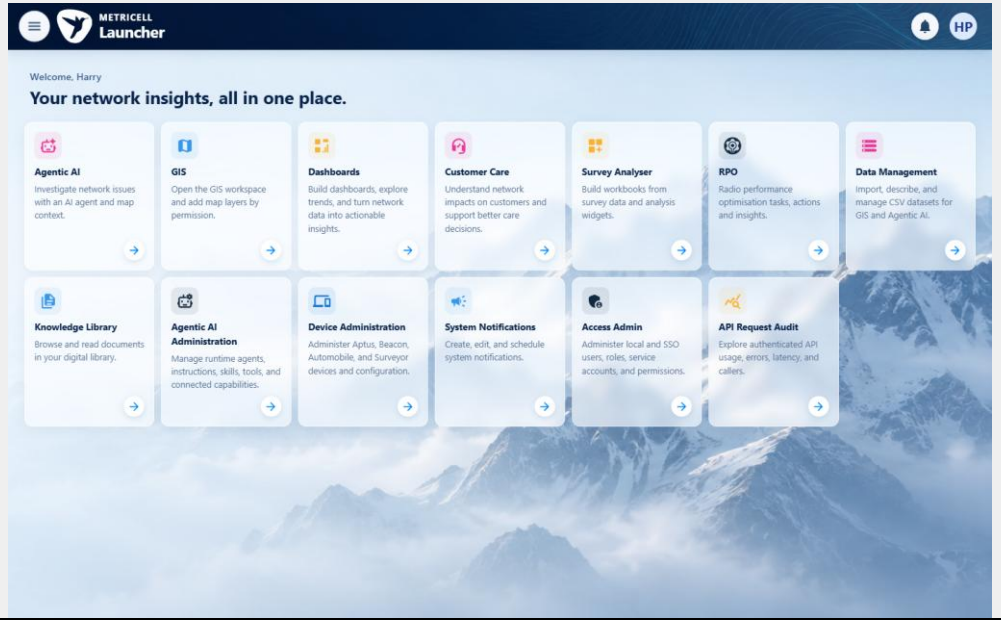

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
12.0.0	Editing a metric's customisable bands, labels, marker size, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.	Editing a metric's customisable bands, labels, marker size, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.	criterion-12-initial.png shows the launcher only. Call markers were unavailable following the reported points HTTP 500, preventing the required edited-marker comparison and metric/layer isolation sequence; immutable category controls were not exercised. Evidence: E11	Blocked

Criterion 12 evidence: Editing a metric's customisable bands, labels, marker size, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-12-initial.png)

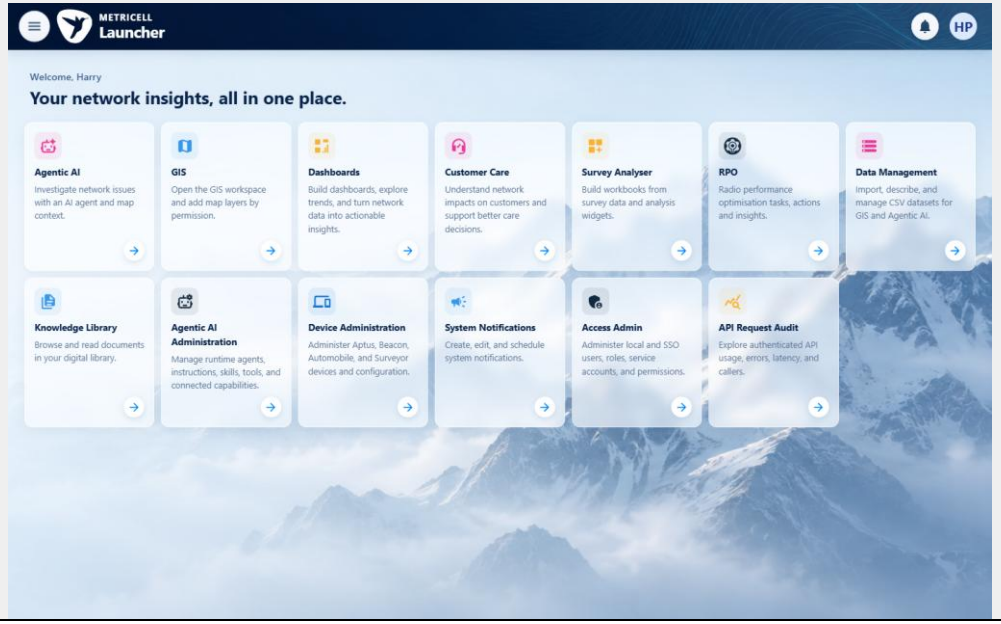


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
13.0.0	Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.	Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.	criterion-13-before-select-uplink.png and criterion-13-after-select-uplink.png show CSR changed to Uplink MOS, followed by the launcher in criterion-13-after-return-launcher.png. criterion-13-final.png retains the Uplink selector/legend but still shows map loading. No legacy saved configuration without Colour By was available, and edited legend restoration was not exercised; a complete settled restoration is not proved. Evidence: E05, E17, E18, E19	Blocked



Criterion 13 evidence: Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E05 - Before select uplink (criterion-13-before-select-uplink.png)

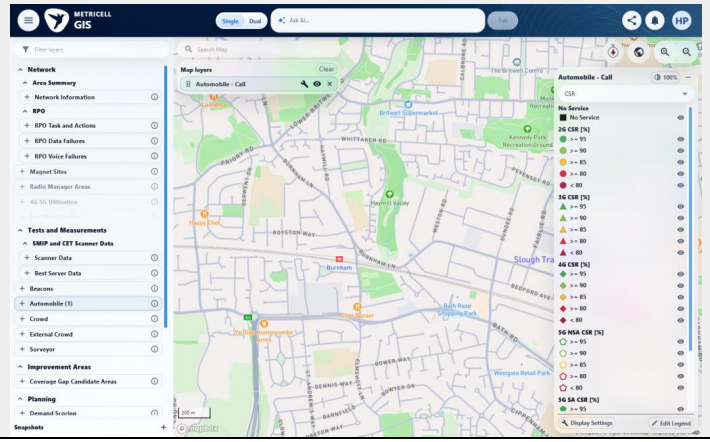

E17 - After select uplink (criterion-13-after-select-uplink.png)

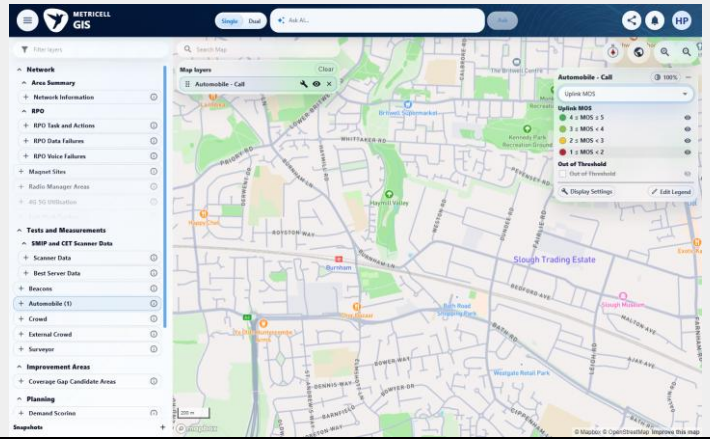


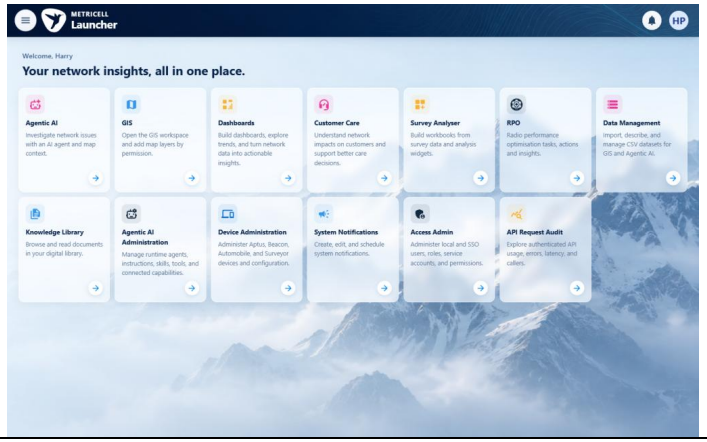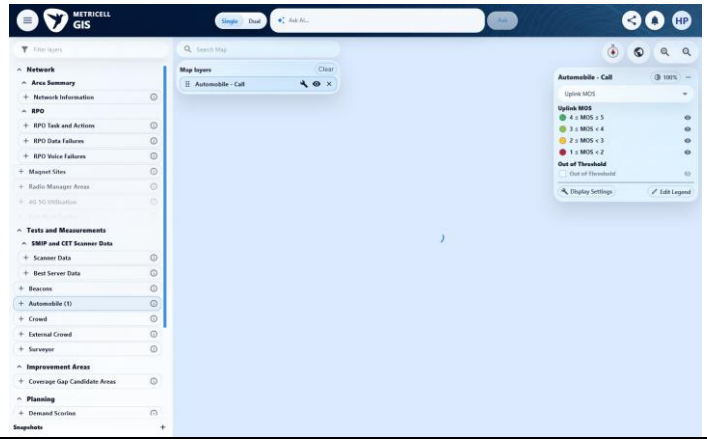ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 13 continued: Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E18 - After return launcher (criterion-13-after-return-launcher.png)**  **E19 - Final (criterion-13-final.png)**  			

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
14.0.0	Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.	Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.	criterion-14-initial.png shows the launcher only. No selectable single-result or clustered Call markers were available after the reported points HTTP 500, preventing both detail-opening journeys and visibility checks. Evidence: E20	Blocked

Criterion 14 evidence: Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E20 - Initial (criterion-14-initial.png)

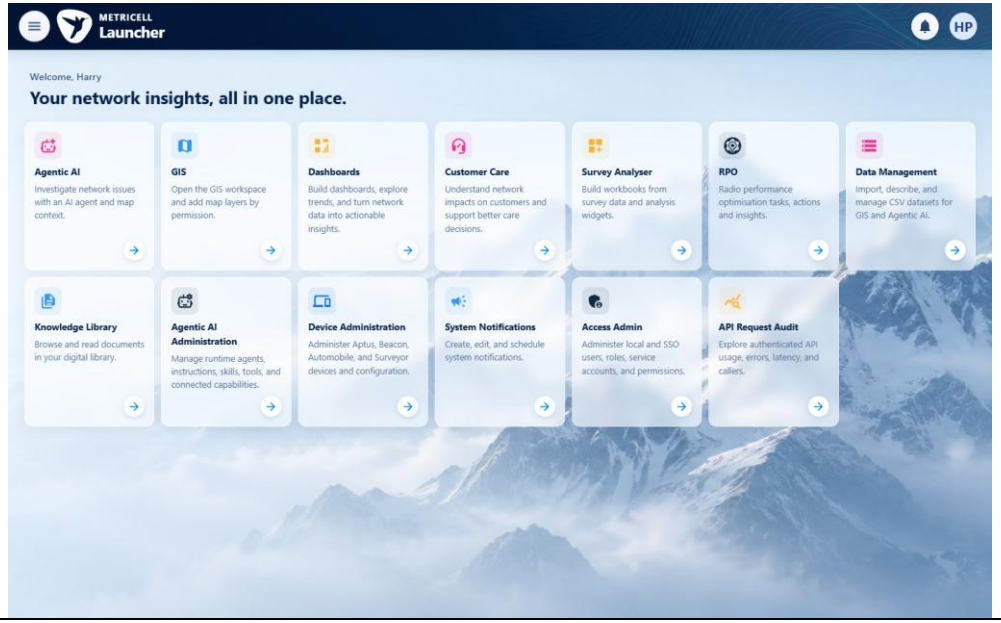

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
15.0.0	The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.	The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.	criterion-15-initial.png shows the launcher only. The reported Call points HTTP 500 prevented opening a cluster table, so the required columns could not be inspected. Evidence: E11	Blocked

Criterion 15 evidence: The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-15-initial.png)

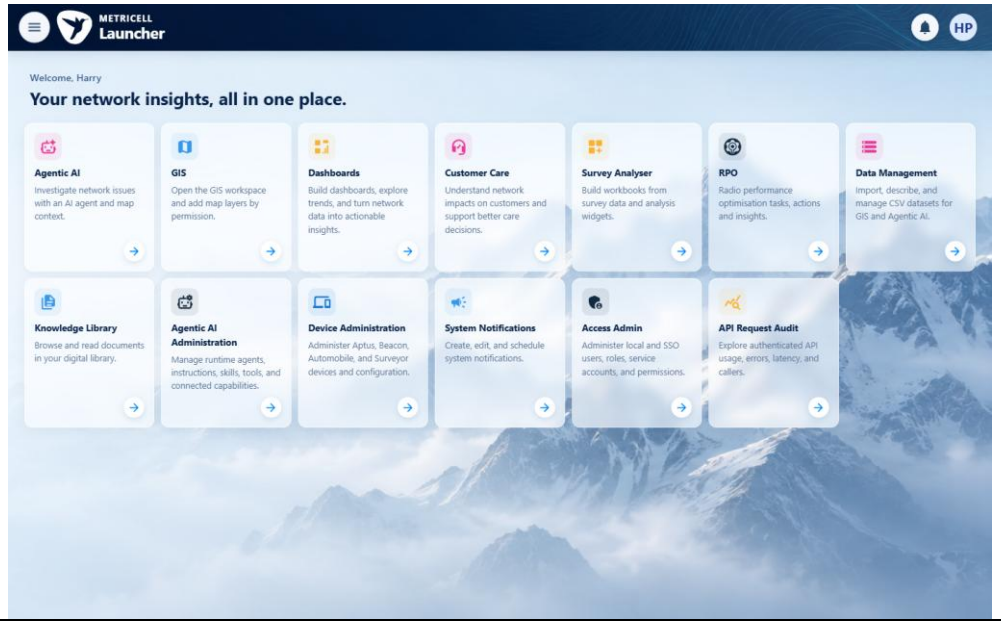

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
16.0.0	Each available column in the cluster results table can be sorted.	Each available column in the cluster results table can be sorted.	criterion-16-initial.png shows the launcher only. The reported Call points HTTP 500 prevented obtaining a populated cluster table needed to verify each column's sort behaviour. Evidence: E18	Blocked

Criterion 16 evidence: Each available column in the cluster results table can be sorted.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher

E18 - Initial (criterion-16-initial.png)

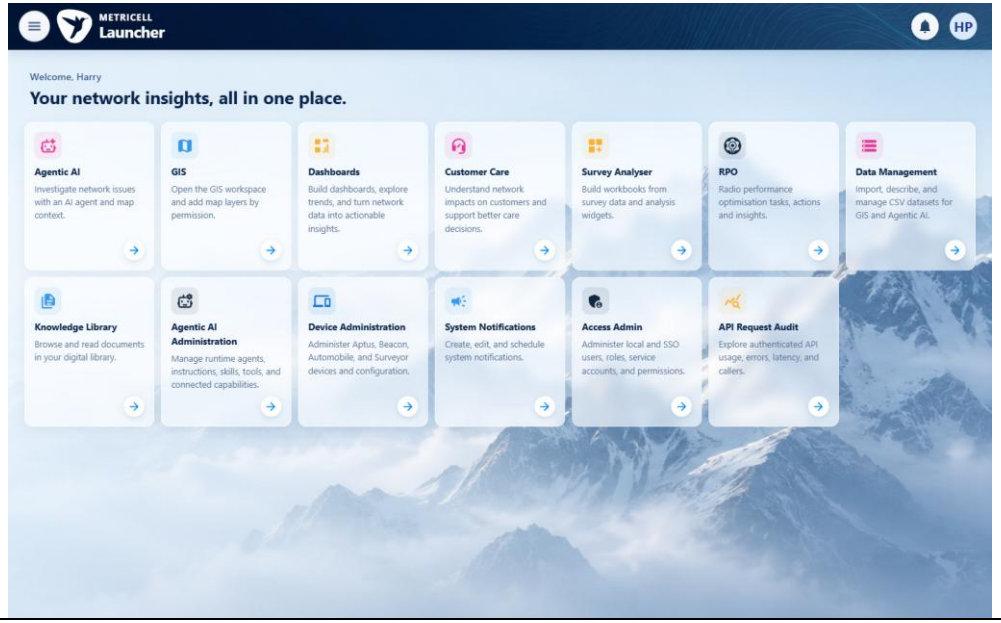


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
17.0.0	Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.	Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.	criterion-17-initial.png shows the launcher only. The reported Call points HTTP 500 left no cluster row or stable PointID for exact-result tab selection, cluster retention and time/filter restoration checks. Evidence: E11	Blocked

Criterion 17 evidence: Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.

Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-17-initial.png)

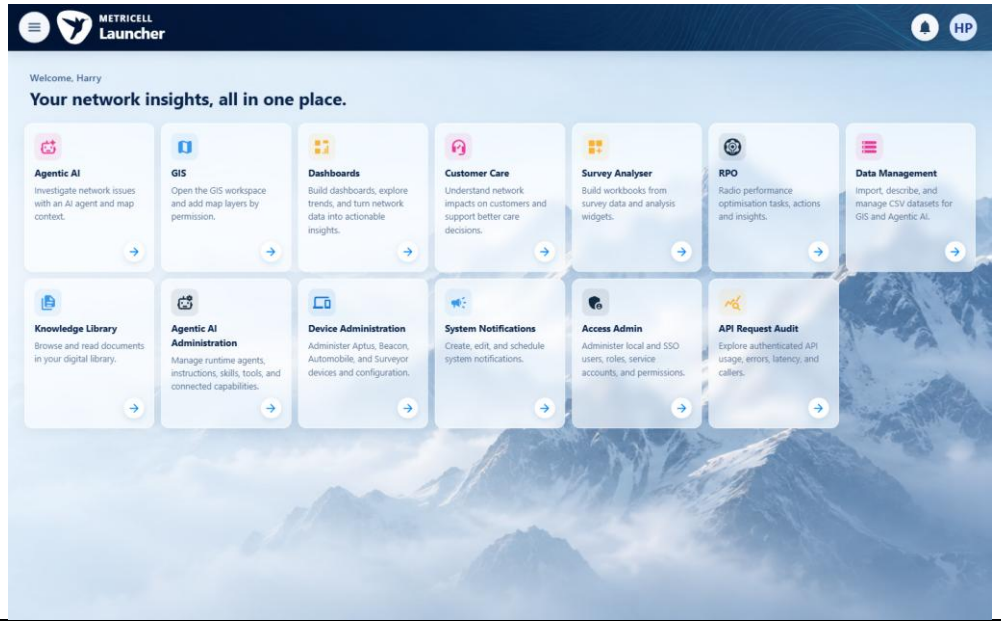

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
18.0.0	When a selected result has related service information, its Service Details tab can be opened.	When a selected result has related service information, its Service Details tab can be opened.	criterion-18-initial.png shows the launcher only. No selectable Call result with related service information was obtainable after the reported points HTTP 500; service drill-down could not be exercised. Evidence: E11	Blocked

Criterion 18 evidence: When a selected result has related service information, its Service Details tab can be opened.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-18-initial.png)

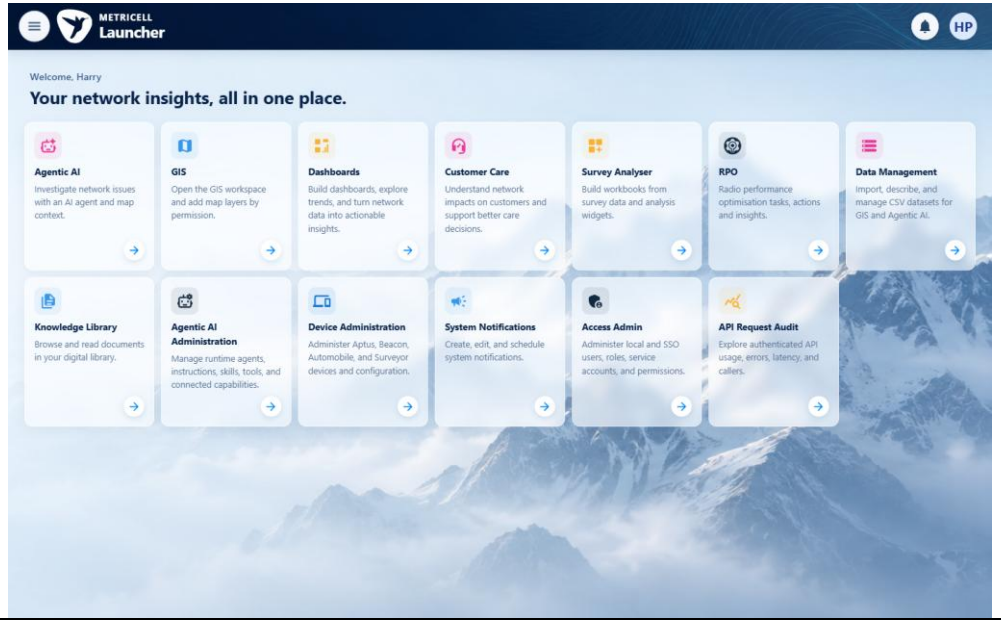


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
19.0.0	Call technology legends and filters include 2G, 3G, 4G, and 5G SA and exclude 5G NSA.	Call technology legends and filters include 2G, 3G, 4G, and 5G SA and exclude 5G NSA.	criterion-19-before-configure-call.png directly shows a 5G NSA CSR [%] legend group. criterion-19-final.png shows Configure Automobile - Call with 2G, 3G, 4G, 5G SA and a checked 5G NSA filter. The visible 5G NSA legend and filter contradict the required exclusion. Evidence: E05, E21	Failed

Criterion 19 evidence: Call technology legends and filters include 2G, 3G, 4G, and 5G SA and exclude 5G NSA.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E05 - Before configure call (criterion-19-before-configure-call.png)

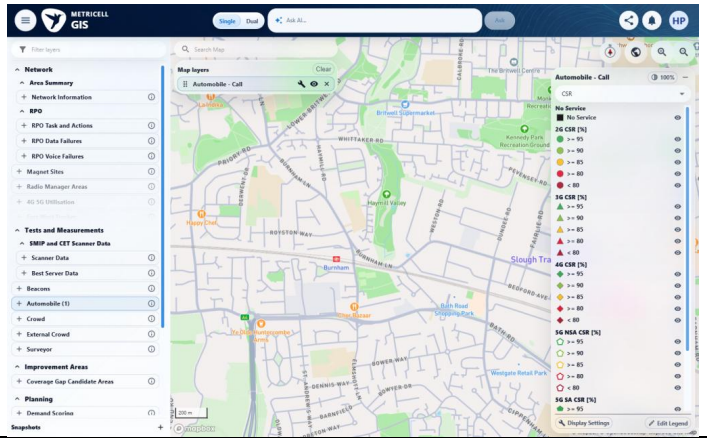


E21 - Final (criterion-19-final.png)

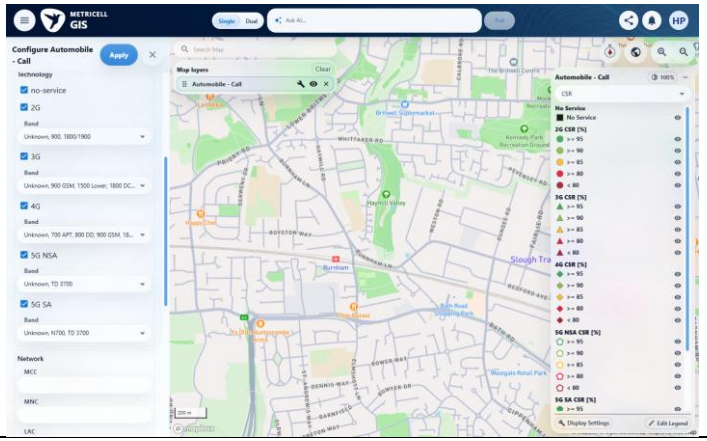

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
20.0.0	Requesting details for a selected result with no duration displays a clear no-data message.	Requesting details for a selected result with no duration displays a clear no-data message.	criterion-20-initial.png shows the launcher only. The reported Call points HTTP 500 prevented identifying and selecting a result without duration, so its requested-detail message could not be checked. Evidence: E11	Blocked

Criterion 20 evidence: Requesting details for a selected result with no duration displays a clear no-data message.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher


E11 - Initial (criterion-20-initial.png)

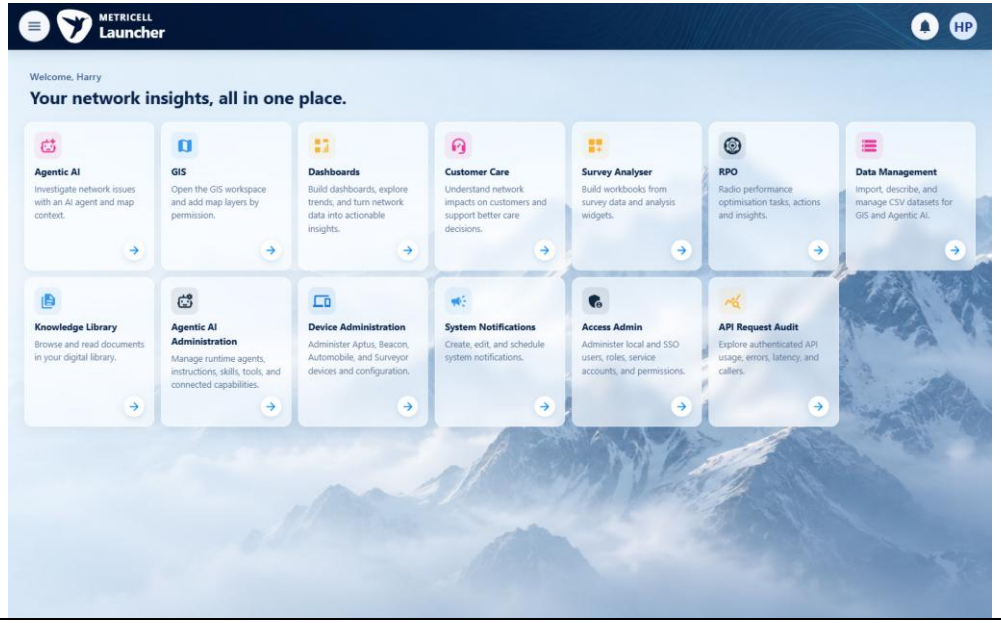

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
21.0.0	When point or service details cannot be returned, the selected item does not show stale detail data.	When point or service details cannot be returned, the selected item does not show stale detail data.	criterion-21-initial.png shows the launcher only. The reported Call points HTTP 500 prevented establishing a prior successful detail state and then a failed point/service retrieval; stale-detail handling was not exercised. Evidence: E11	Blocked


Criterion 21 evidence: When point or service details cannot be returned, the selected item does not show stale detail data.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/launcher

E11 - Initial (criterion-21-initial.png)

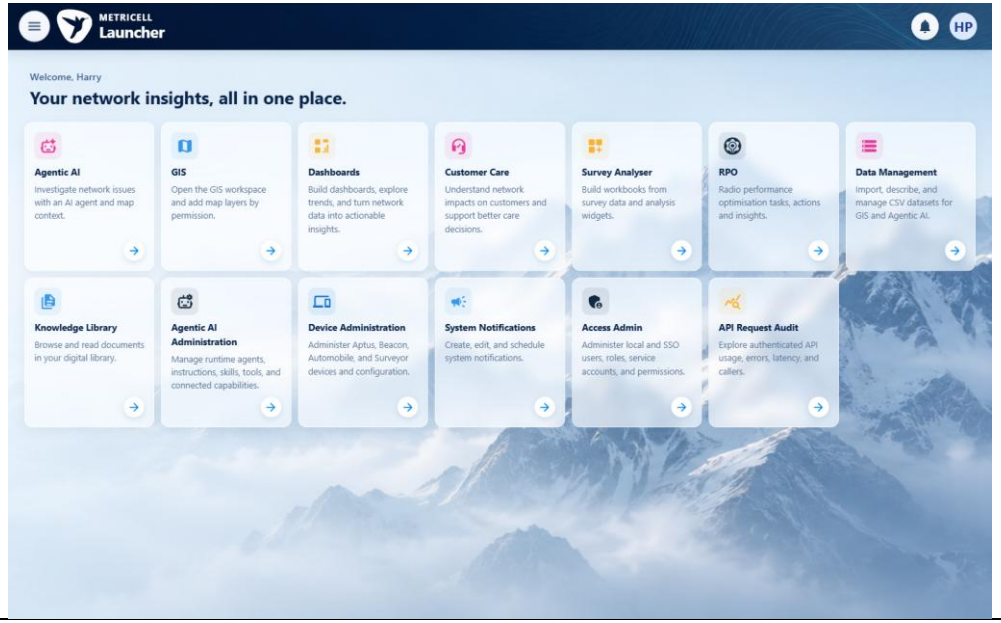


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Supporting setup captures - full attempt evidence remains in the local evidence folder				

E22 - After open gis (criterion-2-after-open-gis.png)

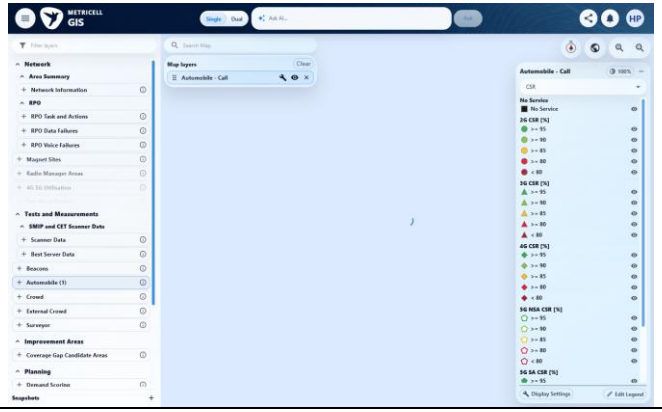

E23 - After open gis (criterion-6-after-open-gis.png)

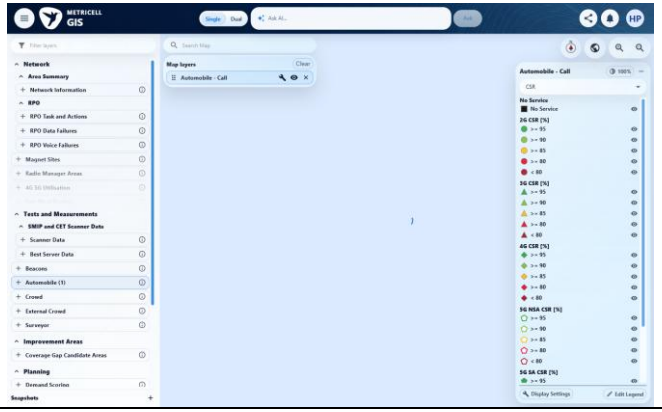

metricell
Better Connected

About Metricell

Metricell is on a mission to deliver connectivity. We work with our customers to design, deliver and manage wireless communication networks – with a shared ambition of achieving flawless network experience. We've been responsible for many first-to-market products, and our technology is characterised by the relentless pursuit of automation and digitalisation.

Our geospatial intelligence tools traverse a wide variety of business processes – from Test & Measurement to Customer Experience Management – and we're pioneers in Crowdsourcing and Digital Self Care. Our technology is today in use by a range of customers; thousands of their personnel; and millions of subscribers worldwide.

Find out more at www.metricell.com

