Automated Test Case Document

Jira Ticket: TEST2-90

Document Classification:	Company Confidential
Document Ref:	Automated Test Case Document
Version:	1.0
Date:	04/11/2026
Document Author:	Automated TEST2 Evidence Review
Document Owner:	Quality Assurance / Metricell

This document and its content is copyright of Metricell Limited @ 2026 all rights reserved. All information contained herein is the intellectual property of Metricell Limited and should be treated as confidential. Any external redistribution of reproduction of part or all of the contents in any form is prohibited unless expressly agreed with Metricell Limited in writing. Any reproduced content must include the following statement; "Part or all of the content contained herein is copyright of Metricell Limited @ 2026 all rights reserved".

Table of Contents

1 Revision History 2
2 Test Cycle Information 3
3 Test Summary 4
4 Test Cases 6
About Metricell 38

1 Revision History

Version	Date	Revision Author	Summary of Changes
[1.0]	04/11/2026	TEST2 QA Automation	Generated from TEST2 evidence review

2 Test Cycle Information

Tester:	**Automated**
Jira Ticket:	TEST2-90
Environment:	o2intelligence-v4-dev.metricell.com
Browser Details:	Google Chrome 156.0.8078.48
Date of Test:	04/11/2026
Limitations during Testing:	Blocked criterion(s): 5. See the assessment below each criterion. Unverified criterion(s): 3, 6, 7, 8, 11, 13, 14. See the assessment below each criterion. Criteria 21 used simulated UI conditions; see their assessments. Inconclusive evidence is reported as Failed, but is not a confirmed application defect.
Overall review outcome:	Blocked
Browser URL(s) recorded after criteria:	https://o2intelligence-v4-dev.metricell.com/gis

3 Test Summary

Area of test	Pass (Y/N)	Fail (Y/N)	Blocked (Y/N)	Defect No
1. With Automobile Call results available, selecting the Call layer displays the results as selectable map points.	Y	N	N	0
2. The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.	Y	N	N	0
3. For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.	N	Y	N	0
4. Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.	Y	N	N	0
5. For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.	N	N	Y	0
6. The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.	N	Y	N	0
7. Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.	N	Y	N	0
8. When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.	N	Y	N	0
9. The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.	Y	N	N	0
10. The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.	Y	N	N	0
11. Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.	N	Y	N	0
12. Editing a metric's customisable bands, labels, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.	Y	N	N	0
13. Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.	N	Y	N	0

Metricell Limited © 2026 – Refer to Title Page
Commercial in Confidence

Area of test	Pass (Y/N)	Fail (Y/N)	Blocked (Y/N)	Defect No
14. Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.	N	Y	N	0
15. The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.	Y	N	N	0
16. Each available column in the cluster results table can be sorted.	Y	N	N	0
17. Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.	Y	N	N	0
18. When a selected result has related service information, its Service Details tab can be opened.	Y	N	N	0
19. Call technology legends and filters include 2G, 3G, 4G, 5G NSA, and 5G SA.	Y	N	N	0
20. Requesting details for a selected result with no duration displays a clear no-data message.	Y	N	N	0
21. When point or service details cannot be returned, the selected item does not show stale detail data.	Y	N	N	0

4 Test Cases

Each test maps to a criterion and decisive browser evidence. Inconclusive results are reported as Failed.


4.1 Tests

Preconditions:	V4 access and ticket conditions.	***Associated Requirements:***	Ticket criteria below.	Automation Notes:	Screenshots below each criterion; full log retained locally.


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
1.0.0	With Automobile Call results available, selecting the Call layer displays the results as selectable map points.	With Automobile Call results available, selecting the Call layer displays the results as selectable map points.	criterion-1-final.png shows Automobile - Call map points; criterion-1-selected-point-final.png shows a selected point opening a Call test tab. Reported requests use /api/platform/automobile/call/points and /call/cluster-details, matching the confirmed Automobile/Call scope. Evidence: E01, E02	Passed

Criterion 1 evidence: With Automobile Call results available, selecting the Call layer displays the results as selectable map points.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E01 - Final (criterion-1-final.png)

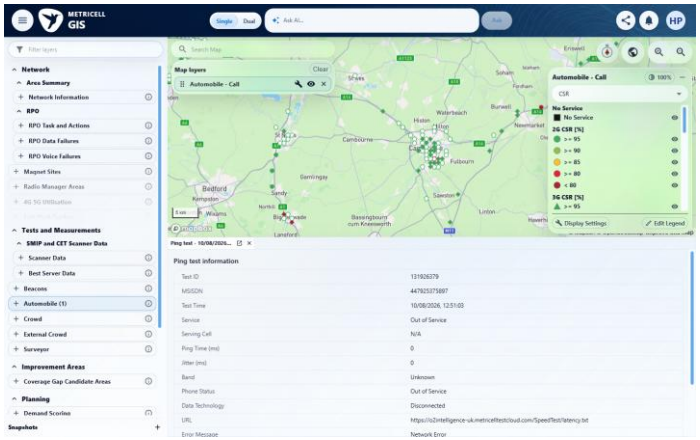


E02 - Selected point final (criterion-1-selected-point-final.png)

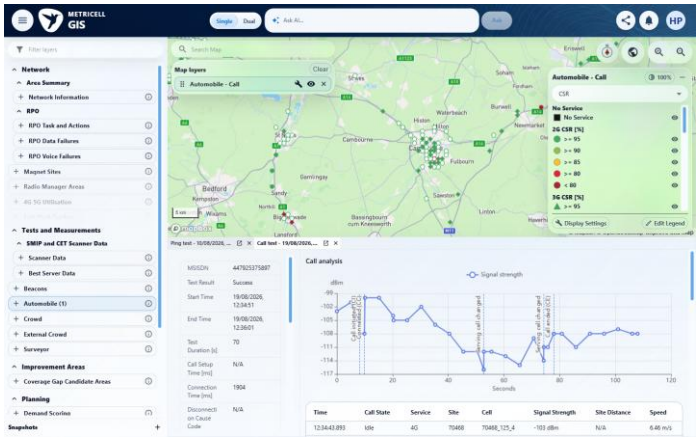


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
2.0.0	The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.	The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.	criterion-2-after-apply-call.png and criterion-2-before-colour-options.png show initial CSR; criterion-2-after-colour-options.png visibly lists CSR, Downlink MOS, Uplink MOS and Estimated MOS. Evidence: E03, E04	Passed

Criterion 2 evidence: The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E03 - Before colour options (criterion-2-before-colour-options.png)

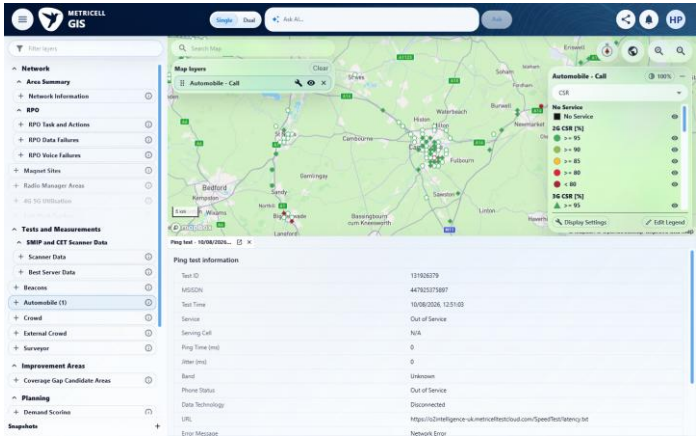


E04 - After colour options (criterion-2-after-colour-options.png)

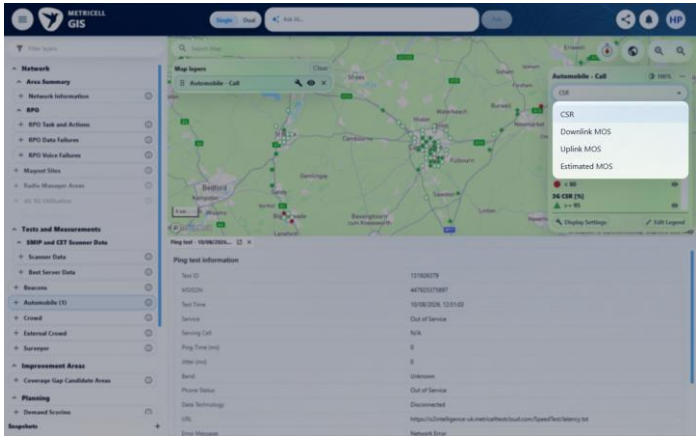


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
3.0.0	For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.	For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.	4 November targeted check: the same genuine aggregate has CSR 80 and dedicated Estimated MOS 1; its marker changes from red #E61733 to dark red #AE1A32 with the selected metric. Matching titles and units remain evidenced. Two bounded map searches and the voice-quality-tested filter found no usable Downlink or Uplink MOS example (the filter returned zero in both scopes). Their source-value association remains inconclusive; this does not establish that no such record exists anywhere in the database. Evidence: E05, E06	Failed

Criterion 3 evidence: For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E05 - Nov4 csr source (criterion-3-nov4-csr-source-ebd3325b-6120-4474-a2a0-d0011413771e.png)

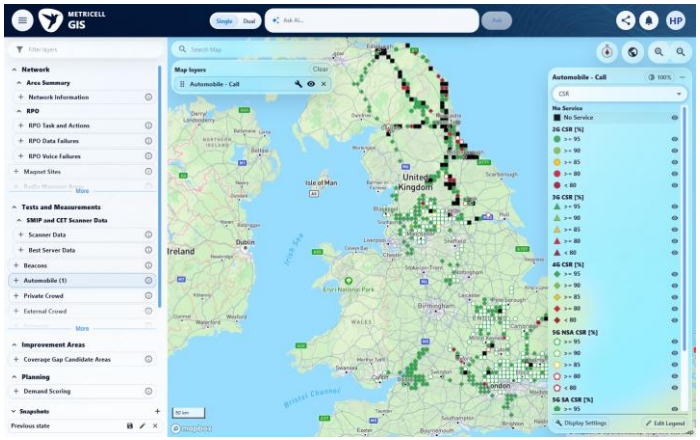


E06 - Nov4 estimated source (criterion-3-nov4-estimated-source-36fae177-0a2b-479e-b220-ce0883dc421d.png)

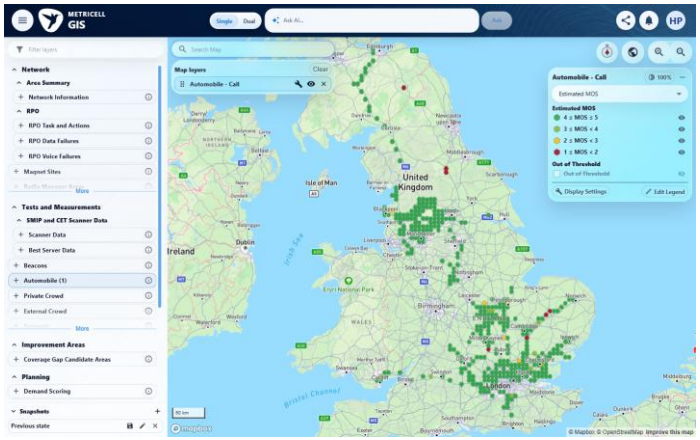


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
4.0.0	Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.	Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.	Focused follow-up, 3 November 2026: CSR → Downlink MOS → Uplink MOS → Estimated MOS → CSR retained Call PointID 132668390. Settled before/after comparisons match all 33 controls and both date fields, including site 508424 and all technology choices. The one-aggregate scoped point set and CSR category visibility were unchanged. This checks preservation of the existing authorised set, not a multi-account permissions audit. Evidence: E07, E08, E09, E10, E11	Passed



Criterion 4 evidence: Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis


E07 - Followup baseline (criterion-4-followup-baseline-358c2f68-08ad-4a12-a614-1dcc9f1e5467.png)

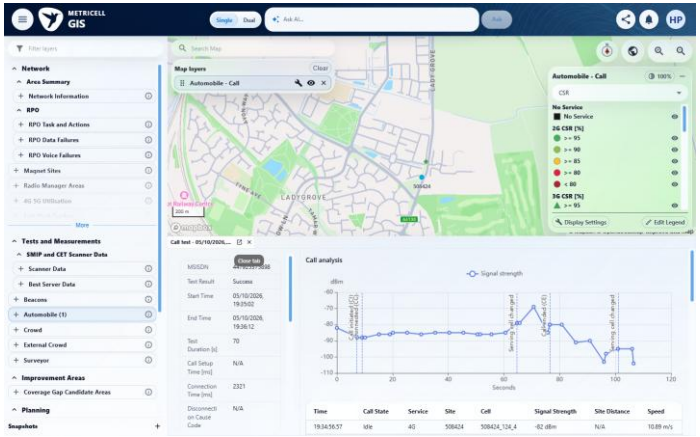

E08 - Followup downlink (criterion-4-followup-downlink-171721c6-e674-49c0-bf20-3e43a17aa844.png)

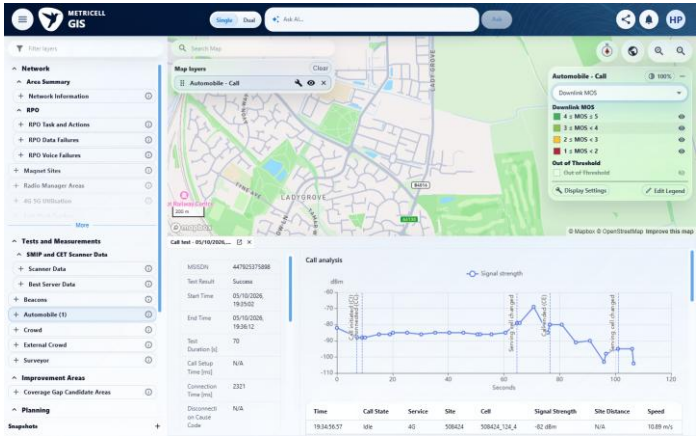

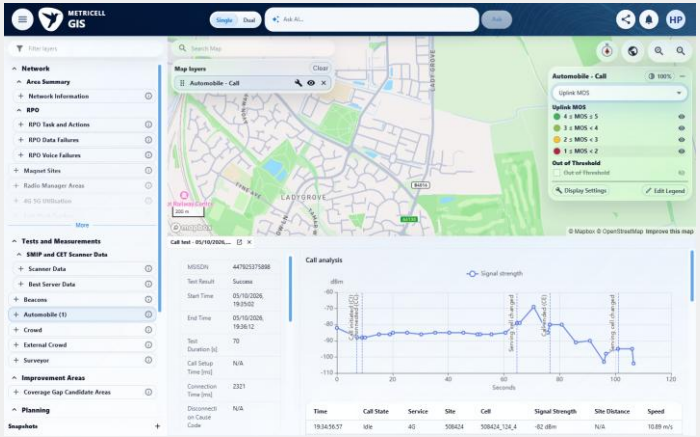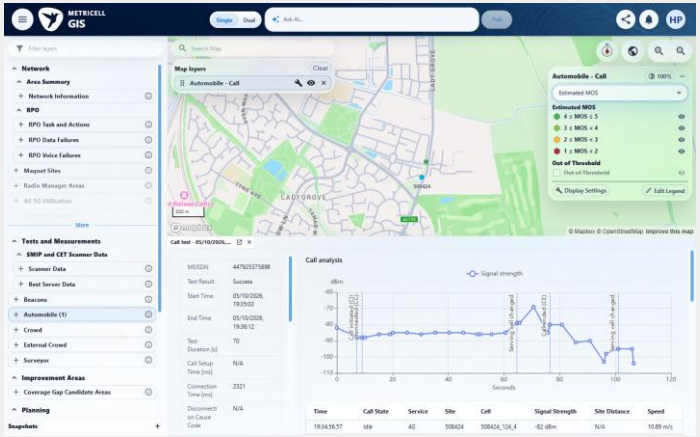
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 4 continued: Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E09 - Followup uplink (criterion-4-followup-uplink-cbf51479-4b8e-46ca-af08-7ff806ad31de.png)**  **E10 - Followup estimated (criterion-4-followup-estimated-0fd9ef0d-10af-4ab6-873e-329ac0d5e5c0.png)** 				

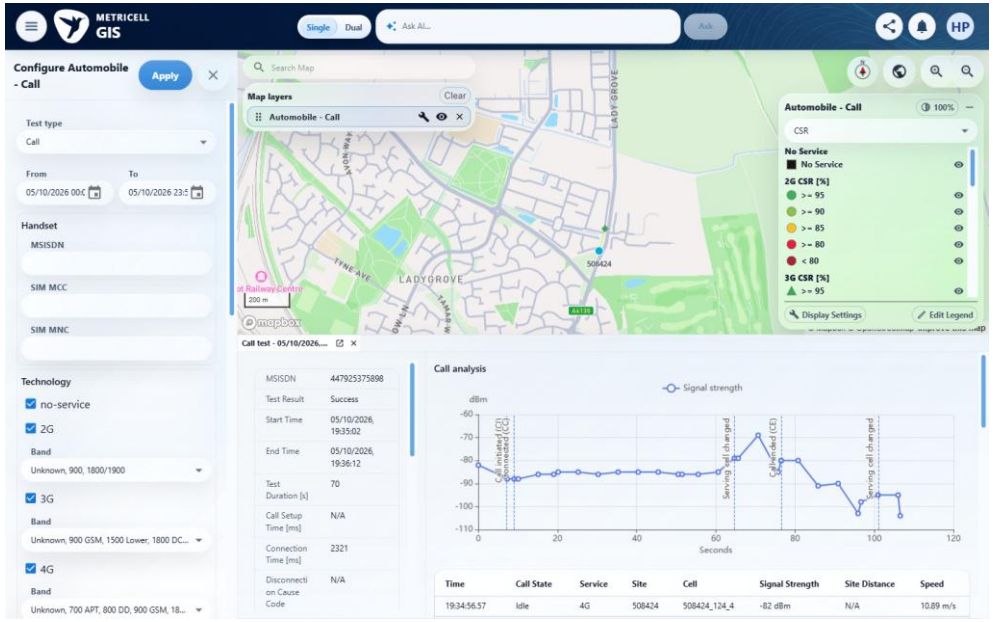ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 4 continued: Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E11 - Followup settled scope (criterion-4-followup-settled-scope-2052b50b-516d-4cf3-8b96-8f9596cb15e4.png)** 

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
5.0.0	For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.	For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.	The original calculation check used an aggregate resolving to one Call. The continuation found a genuine two-row cluster for sorting, so multi-call data is not wholly unavailable. It still does not provide the mixed-outcome component counts, separate valid MOS sample counts, unequal weighting and zero-denominator fixtures needed to verify every required calculation branch. Evidence: E12	Blocked

Criterion 5 evidence: For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis


E12 - After aggregate selection (criterion-5-after-aggregate-selection.png)

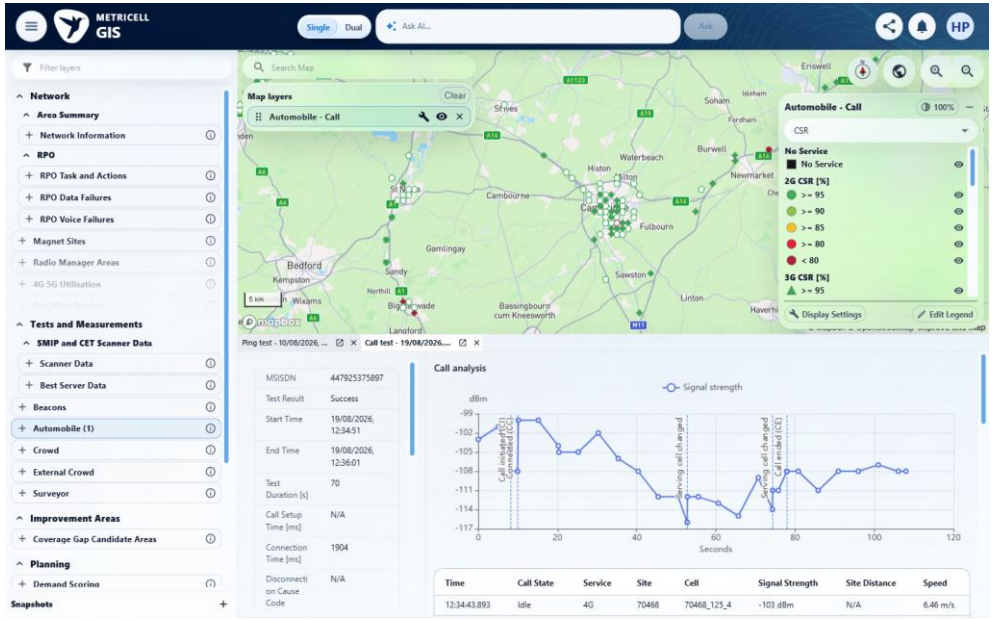


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
6.0.0	The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.	The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.	All five CSR generation sections have the exact required default colour codes and numeric limits 0 to 100. Genuine aggregates at 80% and 90% show red #E61733 and light green #86BE42 respectively, correctly using the higher band. Selected aggregate identities and original screenshot pixels are recorded privately. Exact 85% and 95% examples were absent from the examined map responses, so those runtime boundary branches remain unverified. Evidence: E13, E14, E15	Failed


Criterion 6 evidence: The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E13 - Nov4 csr editor (criterion-6-nov4-csr-editor-c0aa903e-6b2d-4640-a584-47abcf15487a.png)

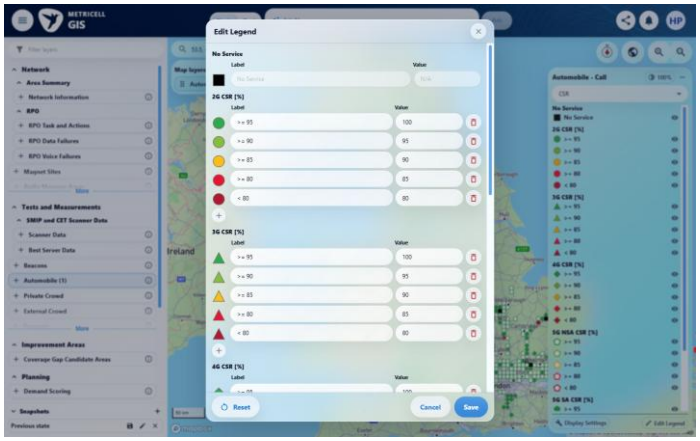

E14 - Nov4 boundary80 map (criterion-6-nov4-boundary80-map-7a9323c5-da89-450a-8617-834acddd0d3b.png)

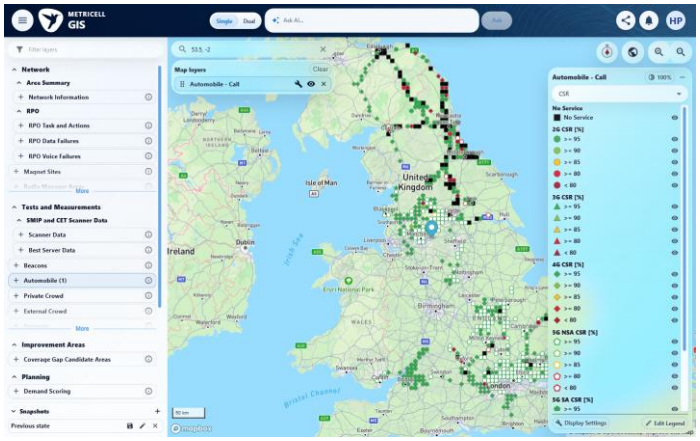


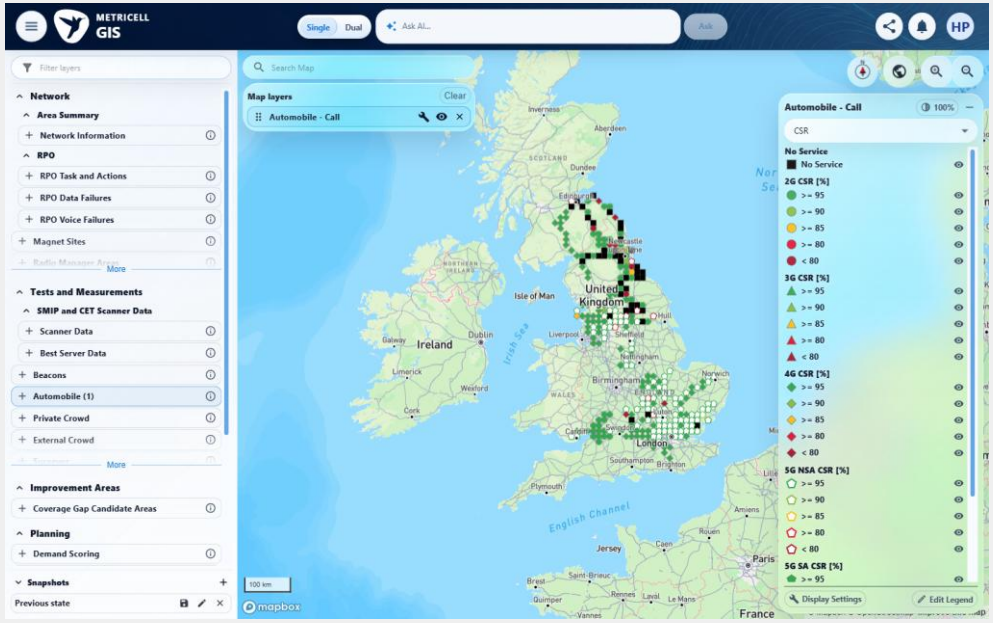ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 6 continued: The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E15 - Nov4 boundary90 map (criterion-6-nov4-boundary90-map-6a8093d4-0e1f-4728-9417-c04011317cc5.png)** 


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
7.0.0	Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.	Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.	Downlink, Uplink and Estimated MOS editors have the required exact colour codes, descending values and limits 1 to 5. A genuine aggregate with Estimated MOS exactly 4 was identified and its cluster identity checked. Nearby green markers overlap, so the attempted pixel selection does not independently isolate that aggregate's boundary classification. No exact 2, 3 or 5 examples were found in the examined responses. Full runtime boundary behaviour remains inconclusive. Evidence: E16, E17, E18, E06, E19	Failed



Criterion 7 evidence: Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis


E16 - Nov4 downlink editor (criterion-7-nov4-downlink-editor-401260b0-2549-4237-82e0-1f170d774a28.png)

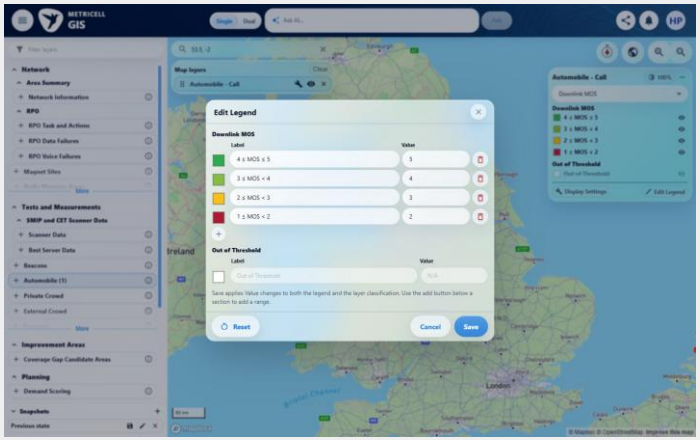

E17 - Nov4 uplink editor (criterion-7-nov4-uplink-editor-df051bd6-8801-4b91-99cf-4dc14da8ba1f.png)

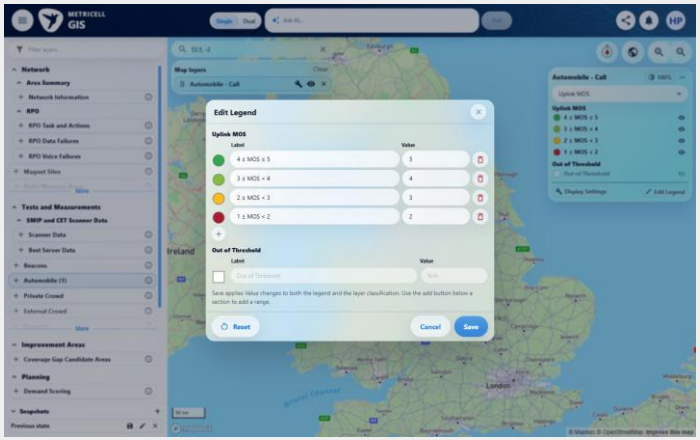

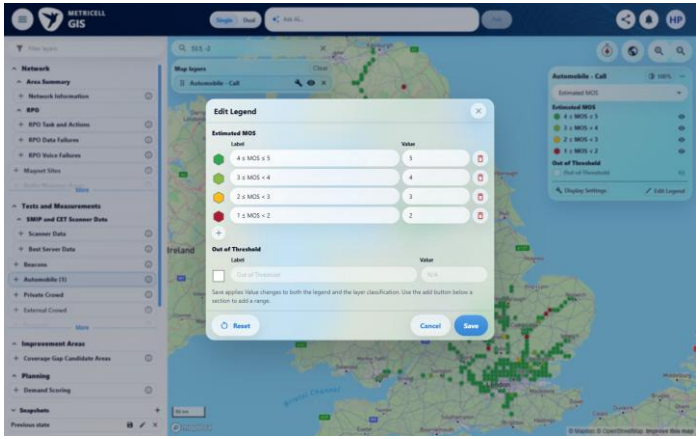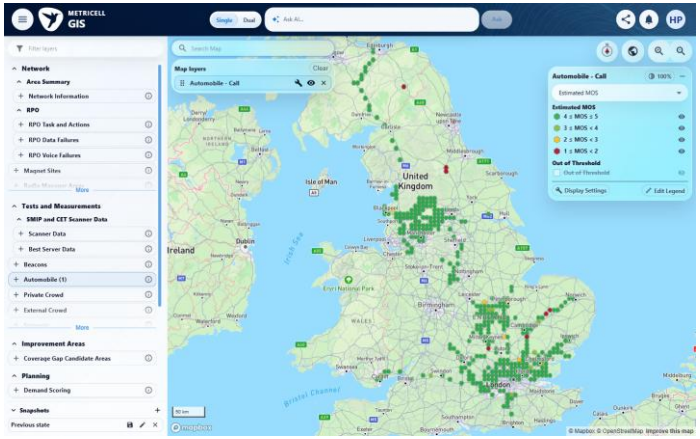
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 7 continued: Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E18 - Nov4 estimated editor (criterion-7-nov4-estimated-editor-cbc35930-925a-4fa0-8f61-daa483d68ff8.png)** 			**E06 - Nov4 estimated boundary4 (criterion-7-nov4-estimated-boundary4-bd0773fa-3f16-46c5-9191-947e9dc1a840.png)** 	

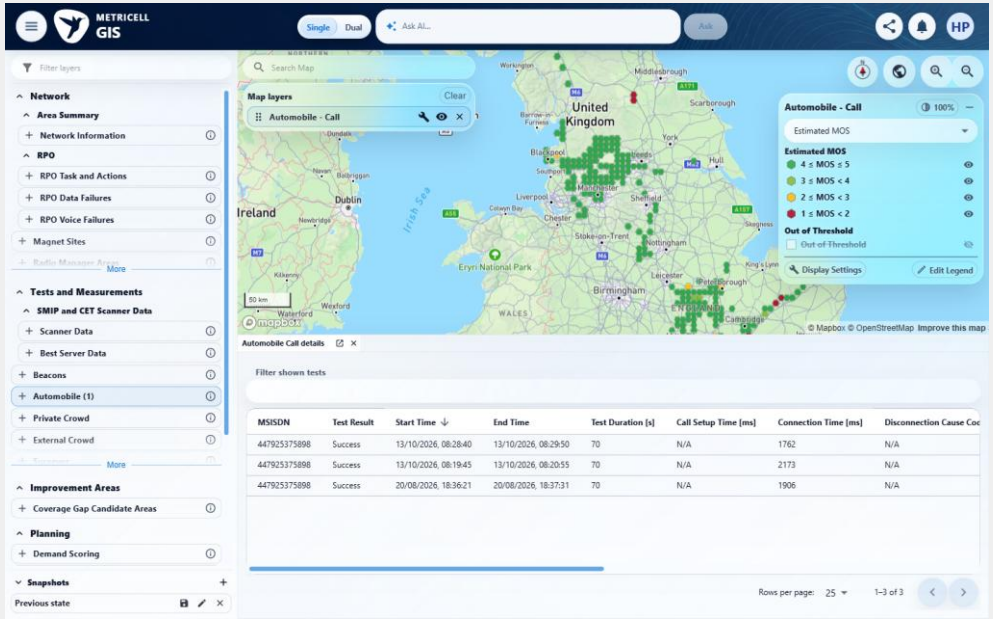ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 7 continued: Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E19 - Nov4 boundary4 selected (criterion-7-nov4-boundary4-selected-6d985659-d9d1-4b90-8d16-63674df357ba.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
8.0.0	When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.	When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.	Earlier evidence establishes that unavailable Downlink/Uplink MOS is not substituted with zero or Estimated MOS, and the white category is initially hidden. The targeted search inspected 608 aggregate observations and then 294 at a broader zoom/current date scope; these overlap. Neither response contained an Estimated MOS value outside 1 to 5, and the voice-quality-tested filter returned no usable sample. The genuine out-of-range classification branch remains unverified. Evidence: E20, E21	Failed
Criterion 8 assessment: Testing notes: Earlier evidence establishes that unavailable Downlink/Uplink MOS is not substituted with zero or Estimated MOS, and the white category is initially hidden. The targeted search inspected 608 aggregate observations and then 294 at a broader zoom/current date scope; these overlap. Neither response contained an Estimated MOS value outside 1 to 5, and the voice-quality-tested filter returned no usable sample. The genuine out-of-range classification branch remains unverified. Switched to Downlink; a click in its hidden-marker state opened no detail and the wait timed out.				

Criterion 8 evidence: When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E20 - Missing mos details (criterion-8-missing-mos-details.png)

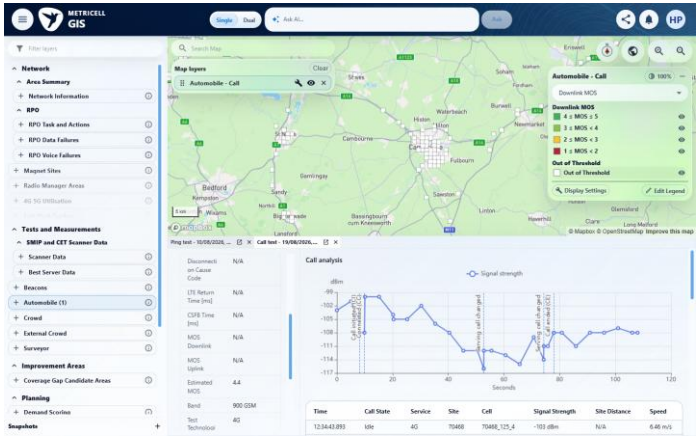


E21 - After show unavailable (criterion-8-after-show-unavailable.png)

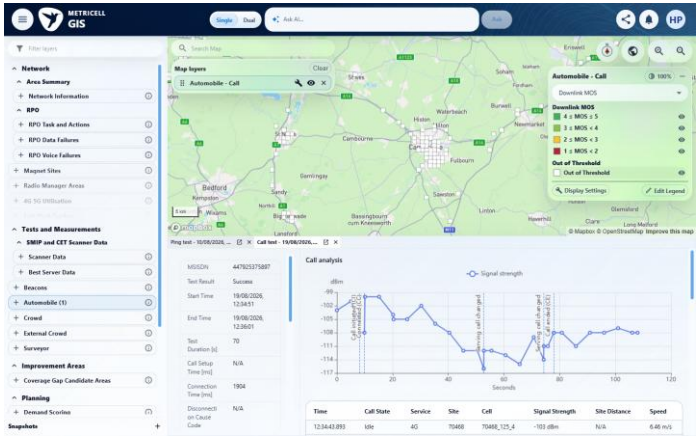


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
9.0.0	The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.	The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.	criterion-9-after-shape-editor.png shows 2G circles, 3G triangles and a separate black-square No Service with greyed definition fields. criterion-9-5g-shapes.png and final.png show a 4G diamond and 5G SA pentagons. The additional NSA section is assessed under criterion 19. Evidence: E22, E23	Passed

Criterion 9 evidence: The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E22 - After shape editor (criterion-9-after-shape-editor.png)

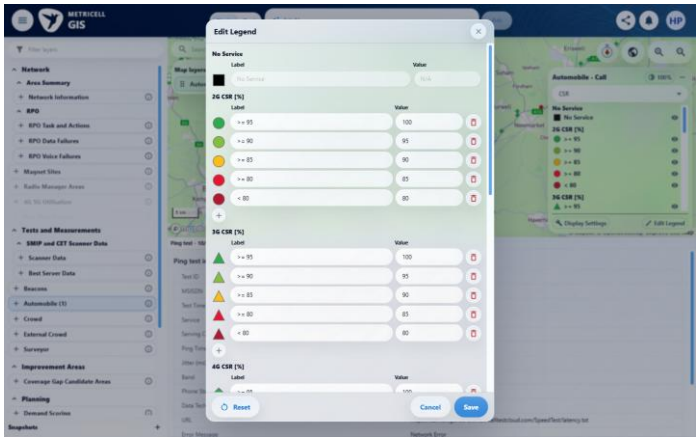


E23 - Final (criterion-9-final.png)

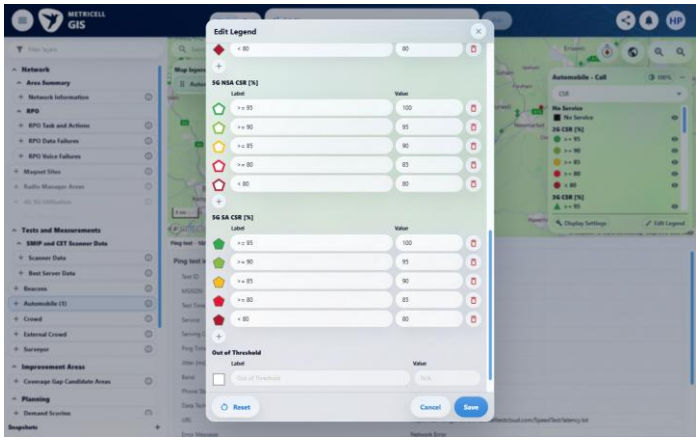


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
10.0.0	The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.	The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.	criterion-10-after-downlink.png, after-uplink.png and after-estimated.png visibly show squares, circles and hexagons respectively, grouped by the chosen MOS metric. Evidence: E24, E25, E26	Passed


Criterion 10 evidence: The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E24 - After downlink (criterion-10-after-downlink.png)

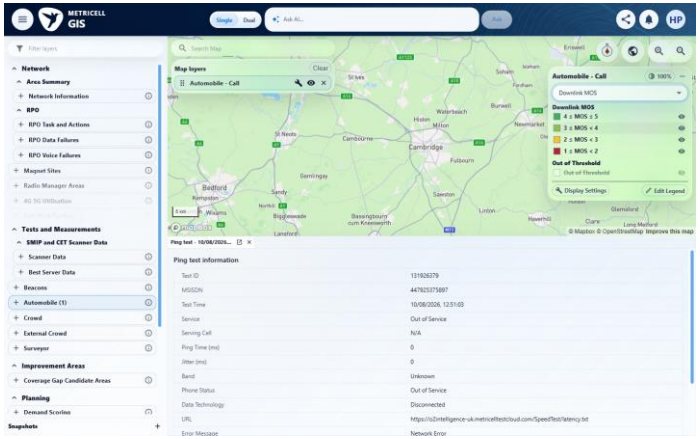

E25 - After uplink (criterion-10-after-uplink.png)

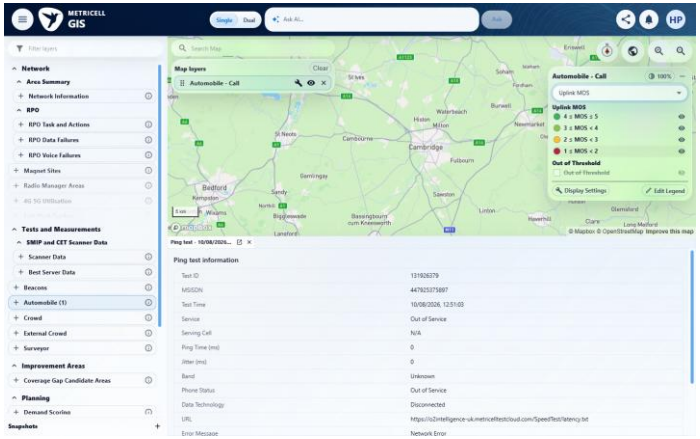


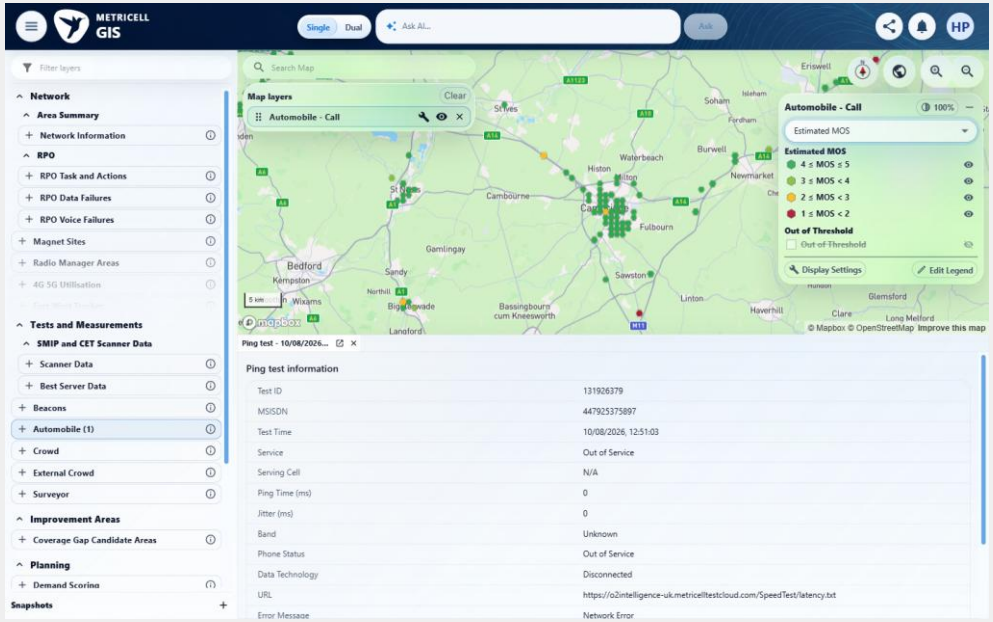ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 10 continued: The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E26 - After estimated (criterion-10-after-estimated.png)**  				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
11.0.0	Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.	Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.	The CSR editor confirms descending bands and limits 0 to 100; all three MOS editors confirm descending bands and limits 1 to 5. Out of Threshold is white, its label/value fields are disabled, and its existing hidden-default evidence is retained. CSR 80/90 classification is now evidenced. Agreement at the remaining exact CSR/MOS boundaries is still incomplete, so the full criterion remains inconclusive. Evidence: E27, E28	Failed

Criterion 11 evidence: Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E27 - Nov4 csr fixed (criterion-11-nov4-csr-fixed-336ff97f-f541-4110-9496-3bb59db4025d.png)

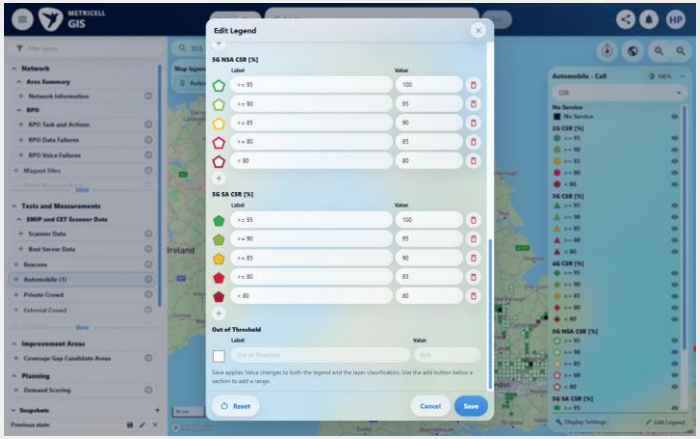


E28 - Nov4 mos fixed (criterion-11-nov4-mos-fixed-b3f2fc9c-01ca-476c-aeae-3ed58833395f.png)

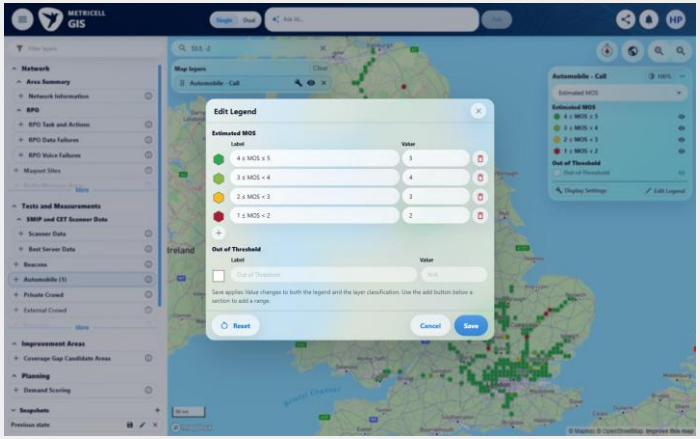


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
12.0.0	Editing a metric's customisable bands, labels, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.	Editing a metric's customisable bands, labels, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.	Band/label edits and category visibility changes update the Call layer, as shown by the retained earlier visible-marker and hide/show sequence. The continuation verifies instance isolation: a temporary Estimated MOS label and 4.5 threshold on map A did not alter map B's default label or threshold 4. Switching A to Uplink MOS hid the custom label; returning to Estimated MOS retained it. Fixed category label/value controls remain immutable. All temporary edits and the extra layer were removed. Marker size was removed from VM2ST-100 by its owner and is outside the current criterion. Evidence: E29, E30, E31, E32	Passed



Criterion 12 evidence: Editing a metric's customisable bands, labels, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis



E29 - After close saved editor (criterion-12-after-close-saved-editor.png)


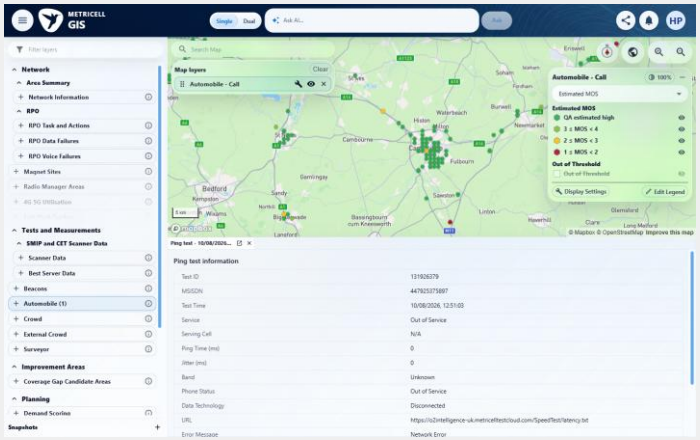


E30 - After hide category (criterion-12-after-hide-category.png)

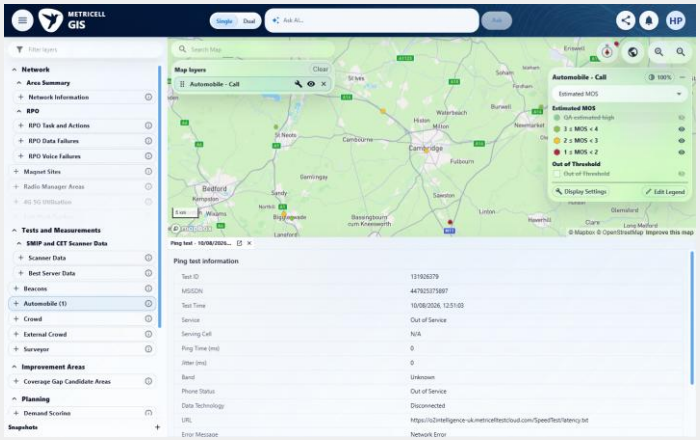

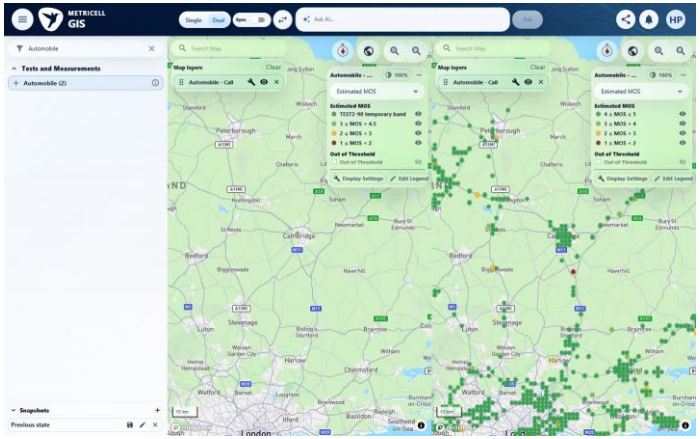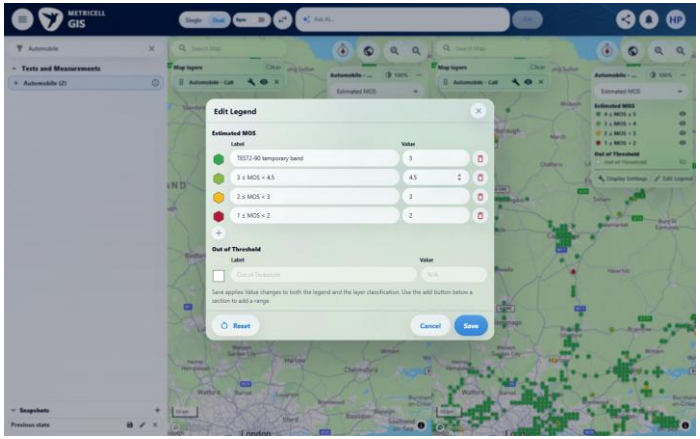ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 12 continued: Editing a metric's customisable bands, labels, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E31 - Continue edited (criterion-12-continue-edited-fbd67b67-0a6e-4e45-9fe4-790e812bb7b8.png)**  **E32 - Continue returned (criterion-12-continue-returned-6f3781b5-da38-4ddf-872a-b7766e196ce2.png)** 				

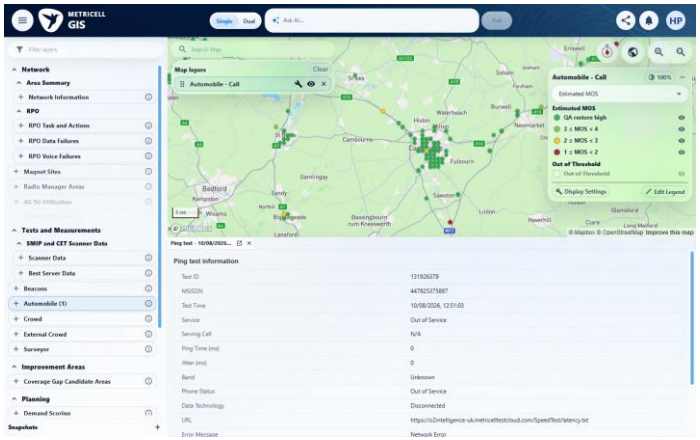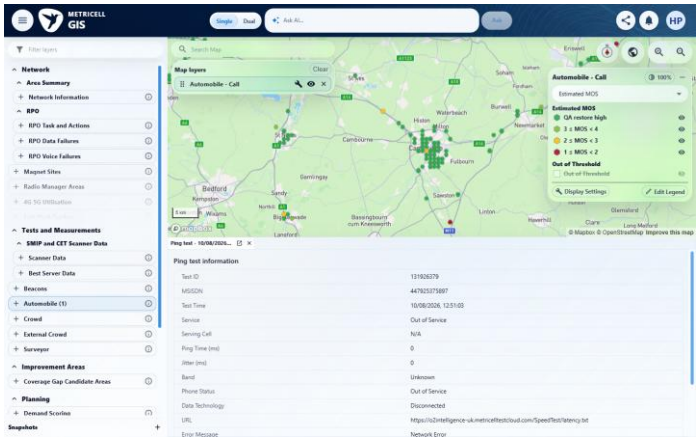
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
13.0.0	Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.	Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.	criterion-13-after-edit-label.png is the saved Estimated MOS/custom-label baseline; restore-launcher.png records leaving GIS and restored-layer.png plus final.png prove the matching metric and label returned. Initial CSR configuration does not independently establish a restored saved configuration with its Colour By choice absent; that fallback branch remains unverified. Evidence: E33, E34	Failed
Criterion 13 evidence: Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E33 - After edit label (criterion-13-after-edit-label.png)**  **E34 - Restored layer (criterion-13-restored-layer.png)** 				
14.0.0	Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.	Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.	criterion-14-after-single-point.png shows a direct Call detail tab; after-nearby-point.png and final.png show the two-row Automobile Call cluster retaining that tab. The single/cluster journey is evidenced, but the asserted existing group-based visibility is not independently demonstrated. Evidence: E12, E35	Failed
Criterion 14 assessment: Testing notes: A tool approval timeout interrupted the first cleanup call; the subsequent cleanup retry succeeded.				

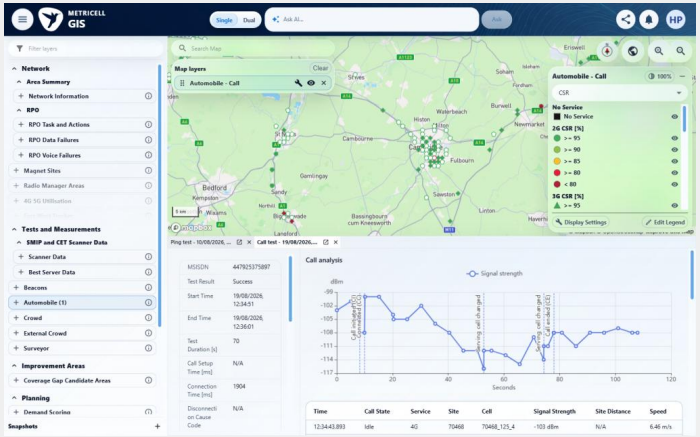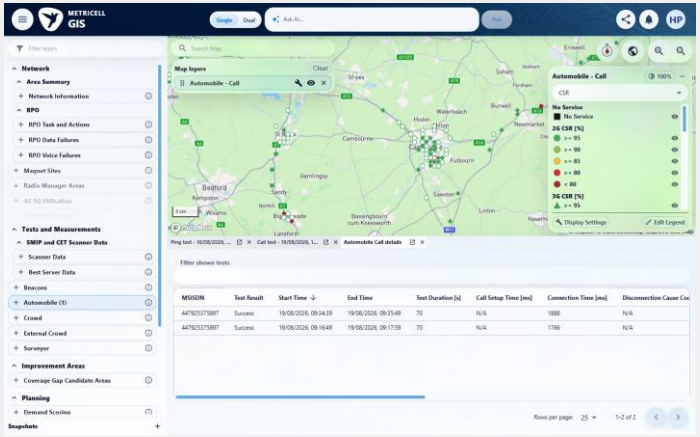ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 14 evidence: Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E12 - After single point (criterion-14-after-single-point.png)**  **E35 - After nearby point (criterion-14-after-nearby-point.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
15.0.0	The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.	The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.	criterion-15-after-cluster.png and middle-columns.png expose the first eight required headings through Disconnection Cause Code; last-columns.png and final.png expose LTE Return Time through Call End Serving Cell, covering all 17 fields. The middle-columns filename still shows the initial horizontal viewport. Evidence: E36, E37	Passed

Criterion 15 evidence: The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E36 - After cluster (criterion-15-after-cluster.png)

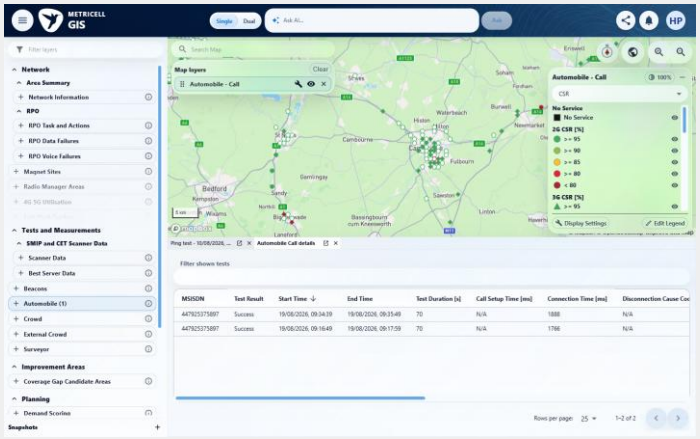


E37 - Last columns (criterion-15-last-columns.png)

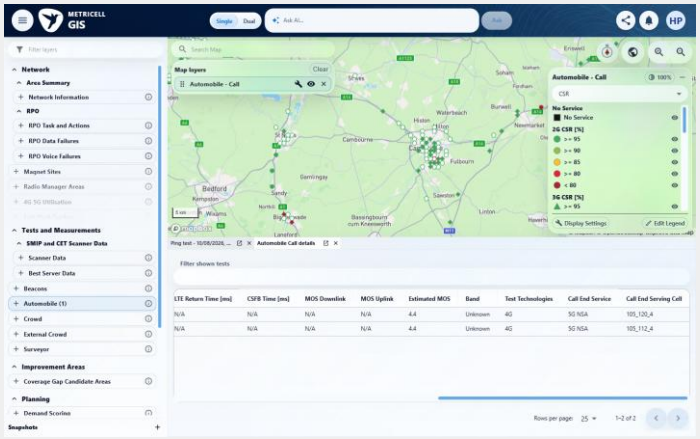


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
16.0.0	Each available column in the cluster results table can be sorted.	Each available column in the cluster results table can be sorted.	All 17 cluster columns were toggled to ascending and descending through their normal controls. The two-row cluster demonstrates actual reversal for Start Time, End Time, Connection Time and Call End Serving Cell, including 105_112_4 versus 105_120_4. Remaining fields contain equal or unavailable values; control behaviour is verified without claiming varied-value ordering for those fields. The private receipt records every column and both sort states. Evidence: E38, E39, E40	Passed


Criterion 16 evidence: Each available column in the cluster results table can be sorted.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E38 - Continue table (criterion-16-continue-table-586ba9d4-ba3b-4773-a0c4-dea84235c39b.png)

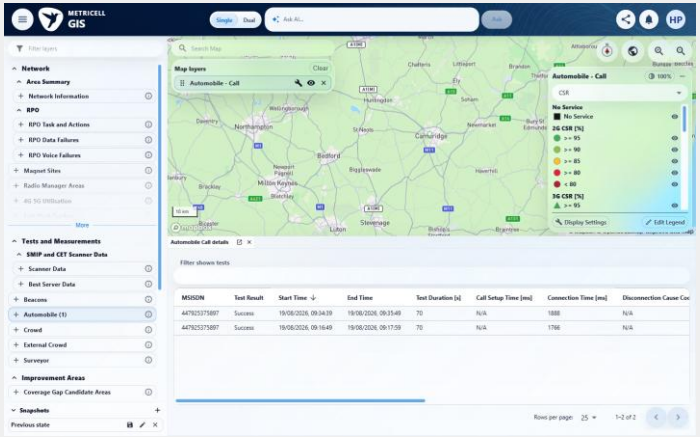

E39 - Continue last ascending (criterion-16-continue-last-ascending-44b98f3f-3124-4305-b131-e593186829c6.png)

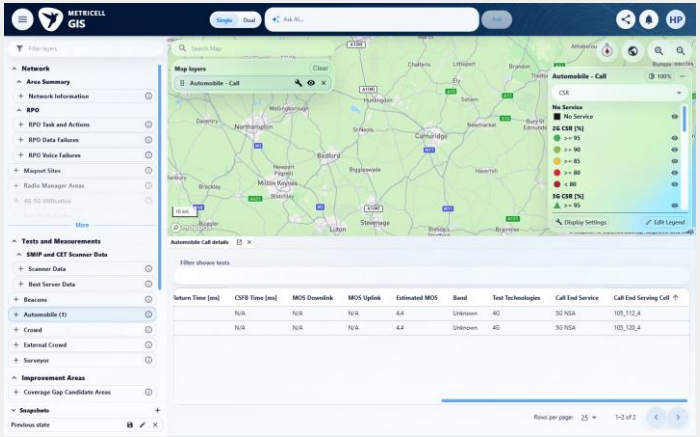


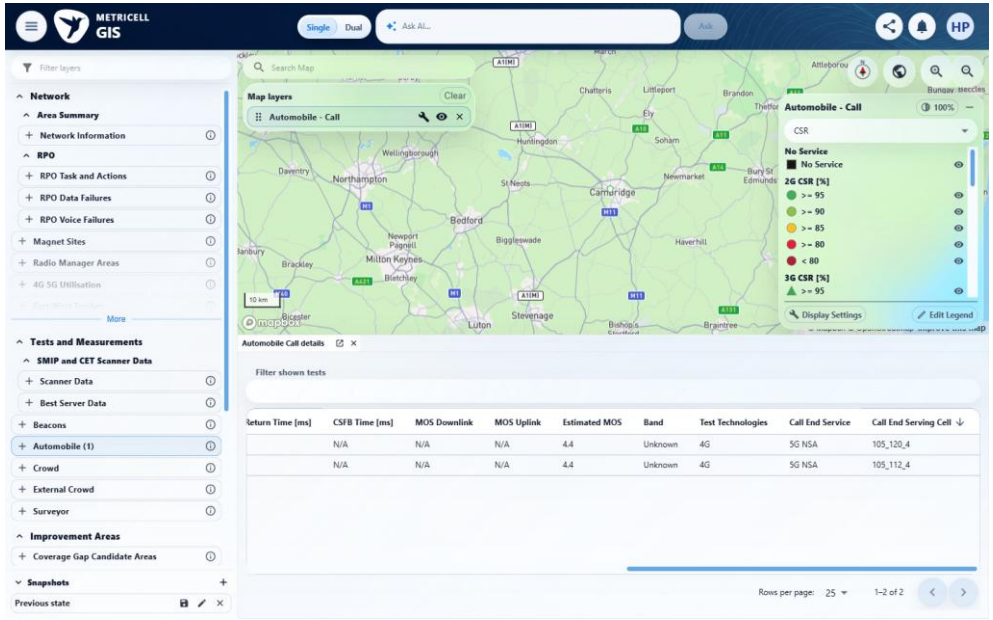ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 16 continued: Each available column in the cluster results table can be sorted. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E40 - Continue last descending (criterion-16-continue-last-descending-677115d1-5afa-46b7-9284-e1e716be0acd.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
17.0.0	Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.	Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.	Earlier cluster/row evidence establishes exact row selection and retention of the cluster tab. The continuation restores Call PointID 132668390 and its related Service sample at 5 October 2026, 19:35:03.77 after leaving GIS for the launcher. Genuine restored requests retain site 508424, the original timeFrom/timeTo, all technology choices and the sample time. Closing and reopening the Service sample retains that scope, and the visible configuration still shows 5 October 00:00–23:59. The related tab is captioned Call detail. Evidence: E36, E41, E42, E43	Passed



Criterion 17 evidence: Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E36 - Cluster (criterion-17-cluster.png)

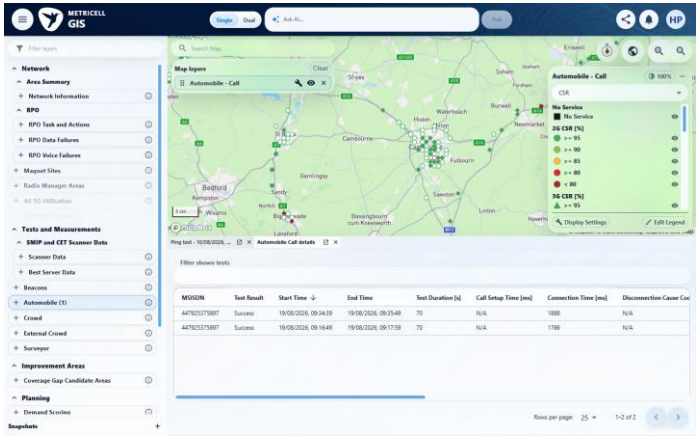

E41 - Selected row (criterion-17-selected-row.png)

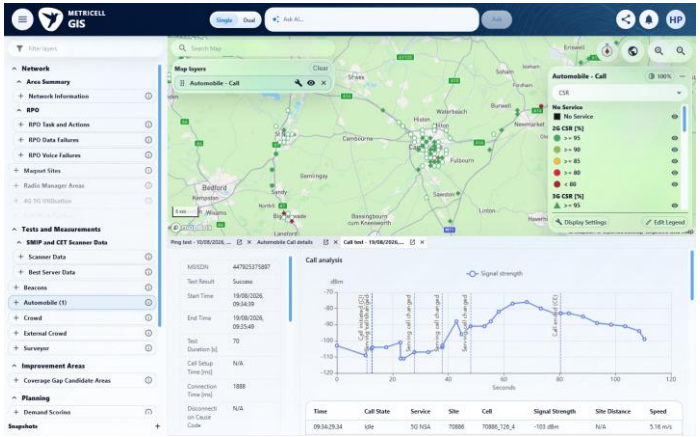


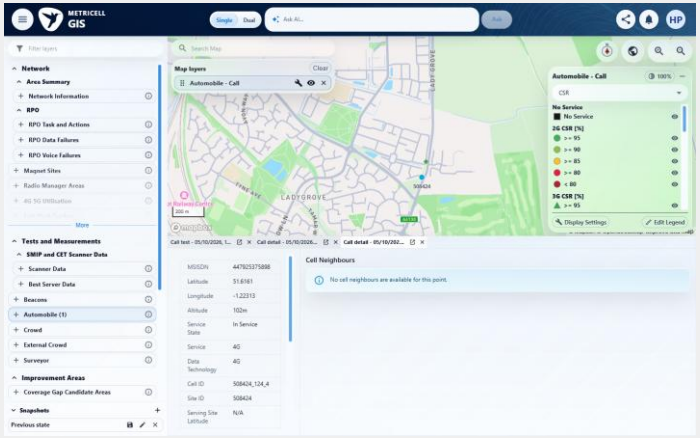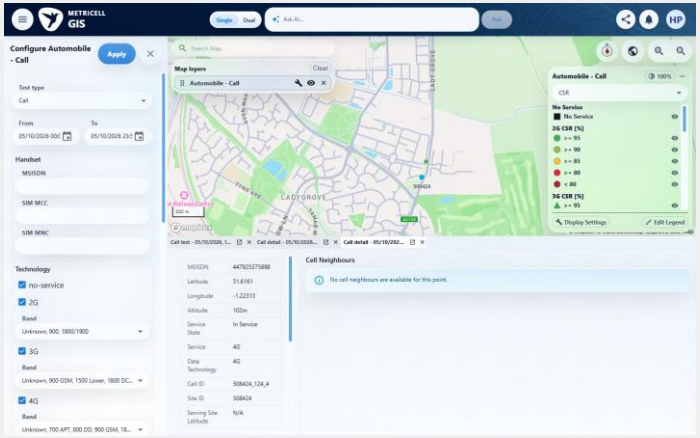ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 17 continued: Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E42 - Continue restored (criterion-17-continue-restored-98beb9c1-c775-4740-b28b-12405ddd37ae.png)**  **E43 - Continue scope (criterion-17-continue-scope-a108a27d-217f-45ee-917b-b2c910c04059.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
18.0.0	When a selected result has related service information, its Service Details tab can be opened.	When a selected result has related service information, its Service Details tab can be opened.	Selecting the genuine Call sample at 5 October 2026, 19:35:03.77 opened a separate tab containing Service state, service/data technology, coordinates and radio/site/cell fields. The genuine test-analysis request ties that content to parent PointID 132668390 and the selected sample time. The tab caption is Call detail, not Service Details; functional related Service content is verified. A null parent serviceDetails field did not mean that the sample-linked route was unavailable. Evidence: E44, E45	Passed

Criterion 18 evidence: When a selected result has related service information, its Service Details tab can be opened.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E44 - Followup before (criterion-18-followup-before-8e4c4dd0-3d46-450b-9bea-0f2fcf06cfc1.png)

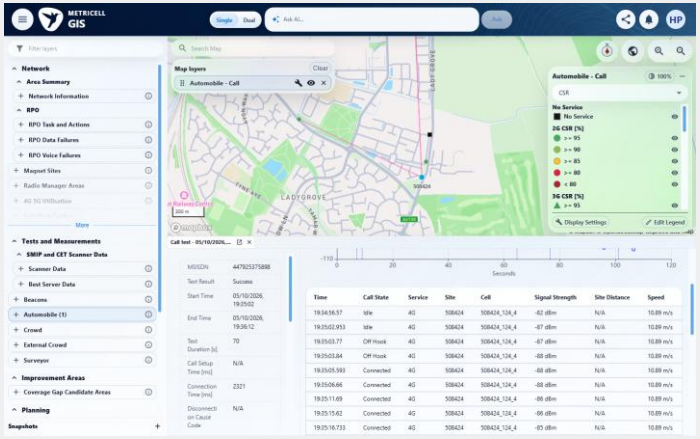


E45 - Followup final (criterion-18-followup-final-0738f160-dce2-4e32-98f6-60b0fec76010.png)

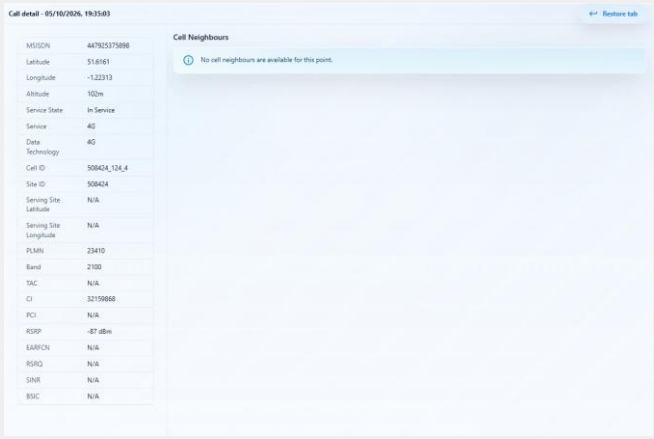


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
19.0.0	Call technology legends and filters include 2G, 3G, 4G, 5G NSA, and 5G SA.	Call technology legends and filters include 2G, 3G, 4G, 5G NSA, and 5G SA.	Under the corrected VM2ST-100/TEST2-90 scope, configuration contains checked 2G, 3G, 4G, 5G NSA and 5G SA choices, plus no-service. The CSR legend contains all five corresponding technology groups, including 5G NSA. Upper/lower configuration screenshots and the final legend demonstrate inclusion; the previous NSA-exclusion failure is obsolete. Evidence: E46, E47, E48	Passed


Criterion 19 evidence: Call technology legends and filters include 2G, 3G, 4G, 5G NSA, and 5G SA.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis


E46 - Followup tech upper (criterion-19-followup-tech-upper-a6b04fe4-e584-4216-9fd8-ab45a3656841.png)




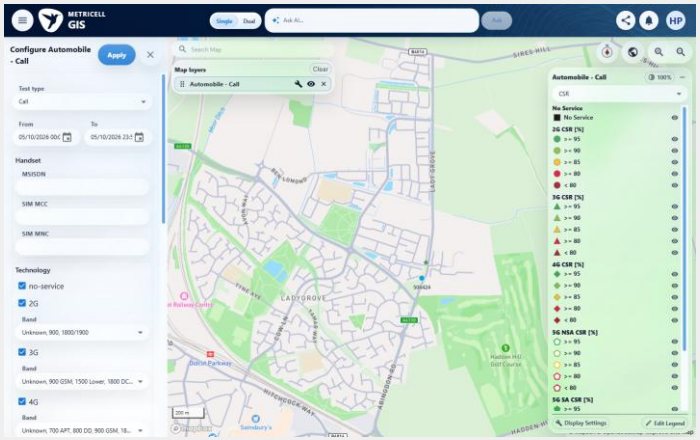




E47 - Followup tech lower (criterion-19-followup-tech-lower-5dc42121-122a-41f0-88ab-2044554c5394.png)

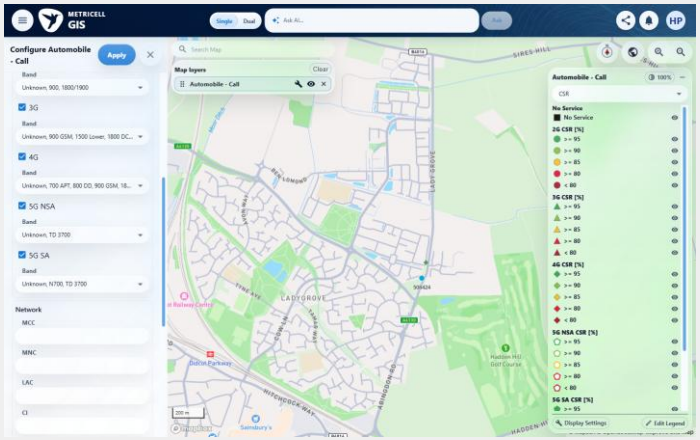

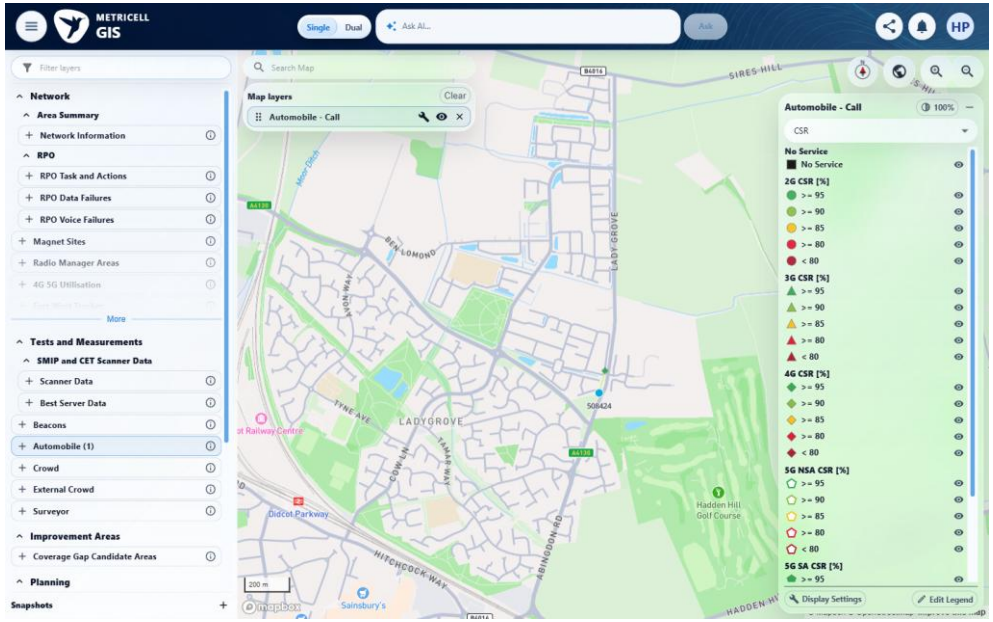ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 19 continued: Call technology legends and filters include 2G, 3G, 4G, 5G NSA, and 5G SA. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E48 - Followup final (criterion-19-followup-final-86f653c2-a183-4556-aaed-1775994ef521.png)** 				
20.0.0	Requesting details for a selected result with no duration displays a clear no-data message.	Requesting details for a selected result with no duration displays a clear no-data message.	criterion-20-no-service-selection.png, zero-duration.png and final.png show the selected Out Of Service Call with identical start/end time, Test Duration [s] 0 and a clear No data available message. The reported genuine Automobile Call detail response identifies PointID 131922311; no simulation was used. Evidence: E49	Passed
Criterion 20 assessment: Testing notes: Inspected one failed result (20.325 s), zoomed out once, then selected the actual No Service point using its observed coordinates and map centre/zoom.				

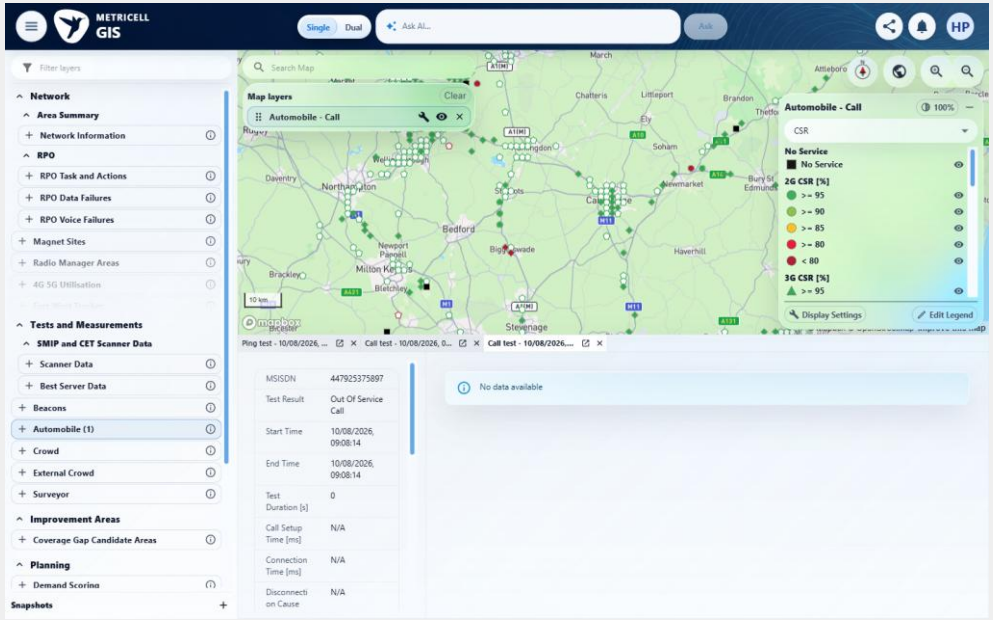ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 20 evidence: Requesting details for a selected result with no duration displays a clear no-data message. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E49 - Zero duration (criterion-20-zero-duration.png)** 				
21.0.0	When point or service details cannot be returned, the selected item does not show stale detail data.	When point or service details cannot be returned, the selected item does not show stale detail data.	The recorded check satisfied the criterion; see the assessment below. Evidence: E50, E51, E52, E53, E54, E55	Passed
Criterion 21 assessment: SIMULATED UI STATE: the prior browser-local Call-detail HTTP 503 check and this continuation's Service-analysis HTTP 503 check both remove stale details. For Service, a genuine baseline sample at 19:34:56.57 had RSRP -82 dBm; the genuine target sample at 19:35:03.77 had -87 dBm under parent PointID 132668390. Only POST /api/platform/automobile/call/test-analysis for that target was intercepted. The UI showed Unable to load Automobile test analysis with no visible detail definitions. One request matched, zero remained pending, the exact handler was removed in finally, and genuine HTTP 200 recovery restored the target. This tests UI error handling, not a real backend outage.				

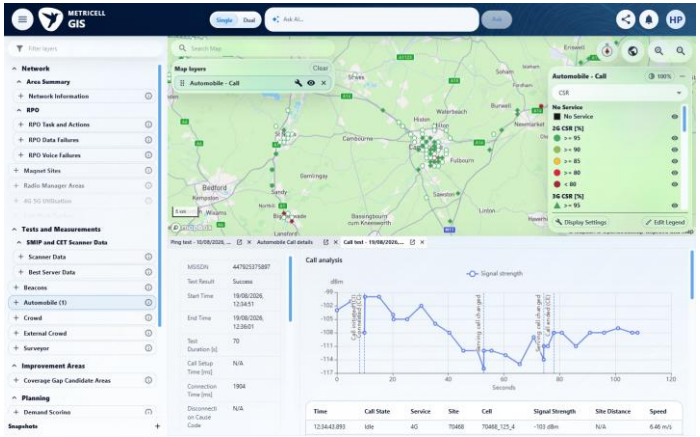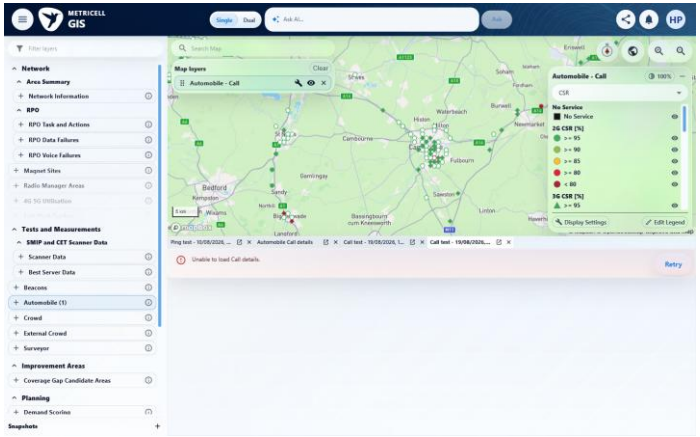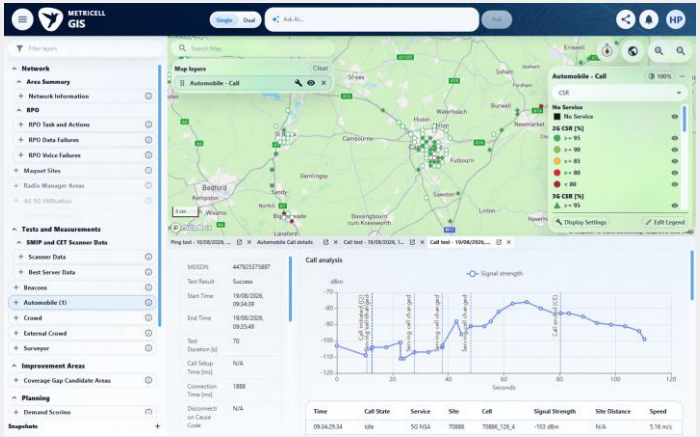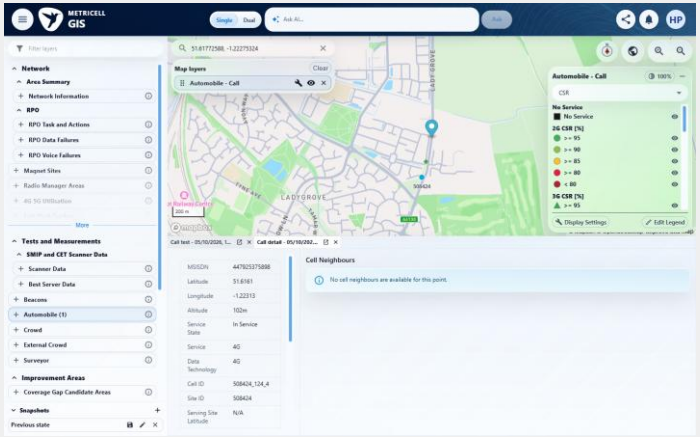ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 21 evidence: When point or service details cannot be returned, the selected item does not show stale detail data. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E50 - Distinct record baseline (criterion-21-distinct-record-baseline.png)**  **E51 - Synthetic error (criterion-21-synthetic-error.png)** 				
Criterion 21 continued: When point or service details cannot be returned, the selected item does not show stale detail data. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E52 - Genuine recovery (criterion-21-genuine-recovery.png)**  **E53 - Continue baseline (criterion-21-continue-baseline-43984079-0c05-4ab1-a848-44d6bf2a4eba.png)** 				

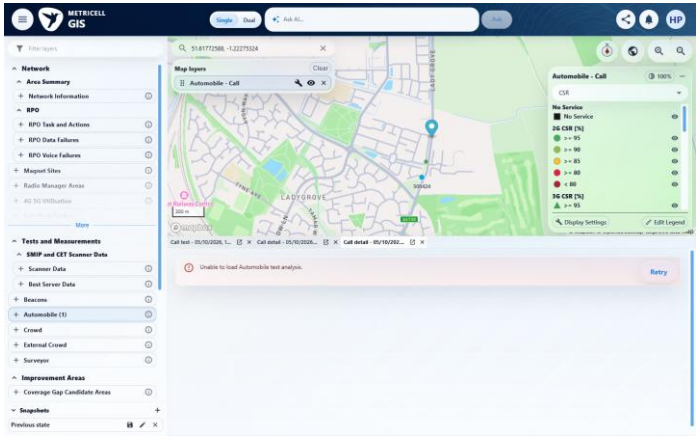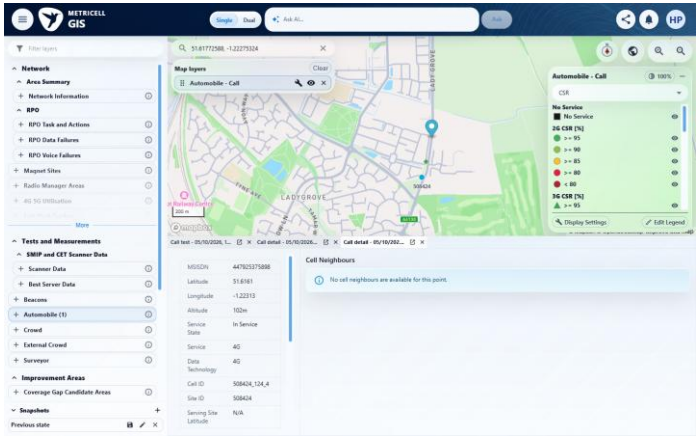ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 21 continued: When point or service details cannot be returned, the selected item does not show stale detail data. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E54 - Continue error (criterion-21-continue-error-390892eb-4a09-4c03-a9da-0ac3aec39a46.png)**  **E55 - Continue recovery (criterion-21-continue-recovery-9895e1f8-59a0-4f86-8b84-0248e0eefa5f.png)** 				

metricell
Better Connected

About Metricell

Metricell is on a mission to deliver connectivity. We work with our customers to design, deliver and manage wireless communication networks – with a shared ambition of achieving flawless network experience. We've been responsible for many first-to-market products, and our technology is characterised by the relentless pursuit of automation and digitalisation.

Our geospatial intelligence tools traverse a wide variety of business processes – from Test & Measurement to Customer Experience Management – and we're pioneers in Crowdsourcing and Digital Self Care. Our technology is today in use by a range of customers; thousands of their personnel; and millions of subscribers worldwide.

Find out more at www.metricell.com

