Automated Test Case Document

Jira Ticket: TEST2-90

Document Classification:	Company Confidential
Document Ref:	Automated Test Case Document
Version:	1.0
Date:	19/10/2026
Document Author:	Automated TEST2 Evidence Review
Document Owner:	Quality Assurance / Metricell

This document and its content is copyright of Metricell Limited @ 2026 all rights reserved. All information contained herein is the intellectual property of Metricell Limited and should be treated as confidential. Any external redistribution of reproduction of part or all of the contents in any form is prohibited unless expressly agreed with Metricell Limited in writing. Any reproduced content must include the following statement; "Part or all of the content contained herein is copyright of Metricell Limited @ 2026 all rights reserved".

Table of Contents

1 Revision History 2
2 Test Cycle Information 3
3 Test Summary 4
4 Test Cases 7
About Metricell 50

1 Revision History

Version	Date	Revision Author	Summary of Changes
[1.0]	19/10/2026	TEST2 QA Automation	Generated from TEST2 evidence review

2 Test Cycle Information

Tester:	**Automated**
Jira Ticket:	TEST2-90
Environment:	o2intelligence-v4-dev.metricell.com
Browser Details:	Google Chrome 155.0.8059.85
Date of Test:	19/10/2026
Limitations during Testing:	17 blocked; 1 inconclusive criterion(s). Reviewed all 21 criteria against attempt-001. Call data and legacy restoration prerequisites block completion; screenshots directly confirm the 5G NSA exclusion failure. Criterion 1: Waited for map load; Call points request returned HTTP 500; selectable Call results unavailable. Criterion 3: Call marker data unavailable due to HTTP 500. Criterion 4: Waited for the Call layer; its points request failed with HTTP 500, preventing a selected-result baseline. Criterion 5: Call points returned HTTP 500. No multi-call marker or underlying successful/failed/dropped call counts and independent MOS sample counts were available to verify the calculations. Criterion 5: Waited for points; observed HTTP 500. Could not obtain a multi-call marker or independently check CSR/MOS calculations. Criterion 6: CSR labels are visible, but Call points returned HTTP 500. Exact-boundary marker classification could not be verified with results at 80/85/90/95/100%. Criterion 6: No boundary result data available because points service failed. Criterion 7: Could not establish boundary fixtures because Call points service returned HTTP 500. Criterion 8: Call points returned HTTP 500; results with no valid MOS samples or out-of-band values could not be obtained. No claim of an empty results set or successful no-sample classification is made. Criterion 8: Required missing-sample and out-of-band Call fixtures unavailable due to points service error. Criterion 9: CSR displays the required 2G circle, 3G triangle, 4G diamond and 5G SA pentagon. No Service is separate and remains a black square; its label/value controls are disabled and the attempted colour-only draft could not be saved. DOM inspection confirmed shapes, but complete viewport evidence for every generation group was not established. Criterion 11: Boundary behaviour requires unavailable Call data. Criterion 12: Observed available legend editing/display controls, but could not establish Call markers for the required before/after edits comparison. Criterion 13: A legacy saved Call configuration without a Colour By choice could not be identified in the available snapshot area or supplied inputs. This fixture is required to test fallback on restoring older configurations; a new layer's default CSR does not prove it. Criterion 13: Could not identify an authorised legacy configuration without Colour By or a saved Call view fixture covering the required associated settings. Criterion 14: Could not select a single-result or clustered Call marker to exercise detail-tab workflow. Criterion 15: The required Automobile Call cluster table cannot be opened because Call points return HTTP 500. Its specified columns could not be inspected. Criterion 15: Could not obtain a multi-call marker to open the Call cluster table; existing Surveyor/HTTP tables are non-matching data. Criterion 16: No Automobile Call cluster results table is available because Call points return HTTP 500. Sorting each available Call column could not be attempted. Criterion 16: Could not obtain a Call cluster with multiple sortable records. Criterion 17: Could not establish a Call cluster row, separate Call tab, or Service tab for restoration checks. Criterion 18: Could not obtain a Call result with related Service Details; unrelated Surveyor results were not substituted. Criterion 20: Could not obtain the required no-

	duration Call result. Criterion 21: Call points returned HTTP 500 before any Call result could be selected. No established Call/Service detail baseline and selected unavailable-detail result were available to test stale-data prevention. Criterion 21: Could not establish a selected Call result with returned details, followed by a result whose point/service details cannot be returned. Inconclusive evidence is reported as Failed, but is not a confirmed application defect. Defects (No.) counts directly contradicted criteria, not unique Jira bugs; blockers and inconclusive evidence count as zero.
Overall review outcome:	Blocked
Browser URL(s) recorded after criteria:	https://o2intelligence-v4-dev.metricell.com/gis

3 Test Summary

Area of test	Pass	Fail	Defects (No.)
1. With Automobile Call results available, selecting the Call layer displays the results as selectable map points.	N	N	0
2. The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.	Y	N	0
3. For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.	N	N	0
4. Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.	N	N	0
5. For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.	N	N	0

Area of test	Pass	Fail	Defects (No.)
6. The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.	N	N	0
7. Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.	N	N	0
8. When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.	N	N	0
9. The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.	N	Y	0
10. The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.	Y	N	0
11. Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.	N	N	0
12. Editing a metric's customisable bands, labels, marker size, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.	N	N	0

Area of test	Pass	Fail	Defects (No.)
13. Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.	N	N	0
14. Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.	N	N	0
15. The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.	N	N	0
16. Each available column in the cluster results table can be sorted.	N	N	0
17. Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.	N	N	0
18. When a selected result has related service information, its Service Details tab can be opened.	N	N	0
19. Call technology legends and filters include 2G, 3G, 4G, and 5G SA and exclude 5G NSA.	N	Y	1
20. Requesting details for a selected result with no duration displays a clear no-data message.	N	N	0
21. When point or service details cannot be returned, the selected item does not show stale detail data.	N	N	0

4 Test Cases

Each test maps to a criterion and decisive browser evidence. Inconclusive results are reported as Failed.

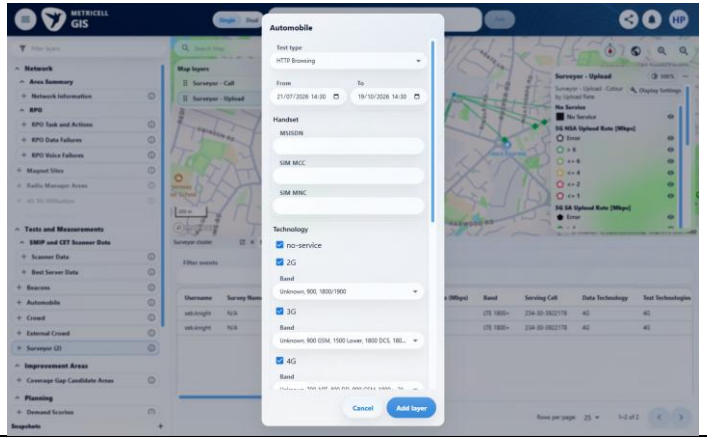
4.1 Tests

Preconditions:	V4 access and ticket conditions.	***Associated Requirements:***	Ticket criteria below.	Automation Notes:	Screenshots below each criterion; full log retained locally.


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
1.0.0	With Automobile Call results available, selecting the Call layer displays the results as selectable map points.	With Automobile Call results available, selecting the Call layer displays the results as selectable map points.	criterion-1-final.png shows an Automobile Call legend alongside Surveyor results, without a demonstrated selectable Automobile Call result. The tester reports Call points HTTP 500, blocking the required available-data prerequisite. Evidence: E01, E02, E03	Blocked


Criterion 1 evidence: With Automobile Call results available, selecting the Call layer displays the results as selectable map points.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E01 - After open automobile (criterion-1-after-open-automobile.png)



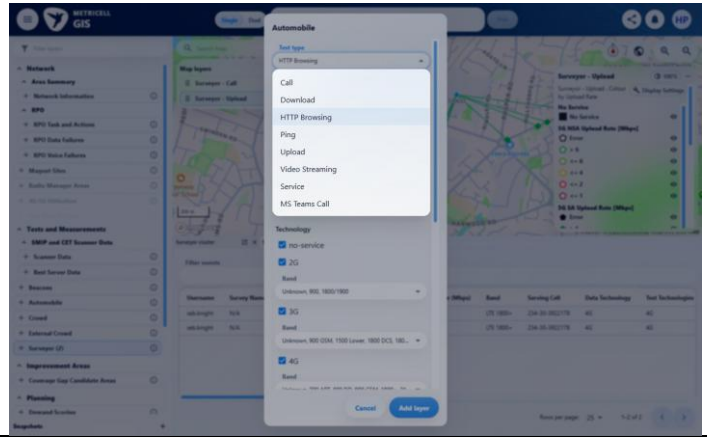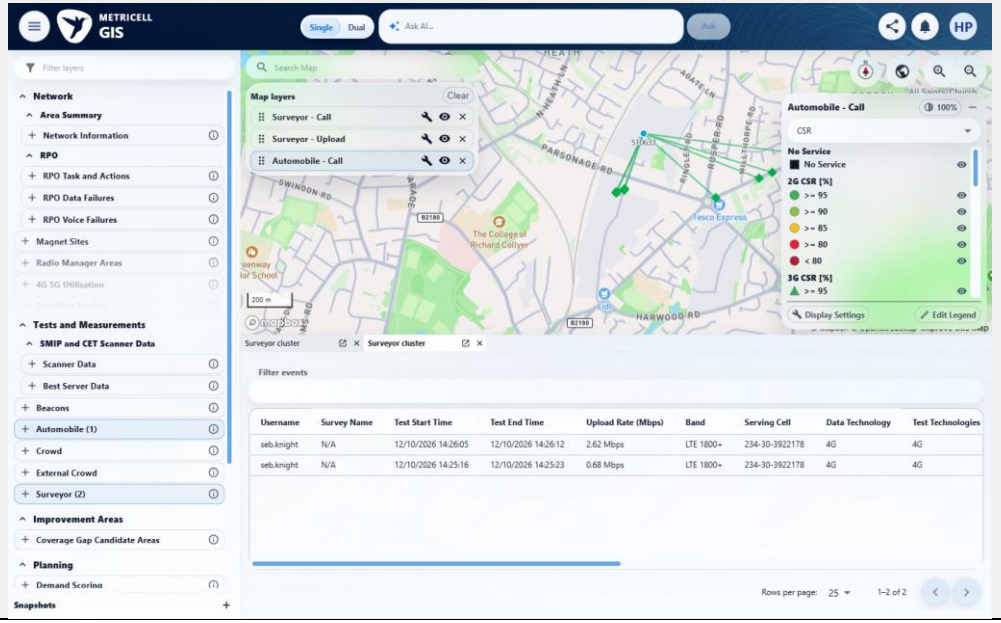E02 - Before select call (criterion-1-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 1 continued: With Automobile Call results available, selecting the Call layer displays the results as selectable map points. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E03 - Final (criterion-1-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
2.0.0	The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.	The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.	criterion-2-before-add-call.png shows a new Call configuration; criterion-2-after-add-call.png shows CSR selected before any metric change. criterion-2-final.png visibly offers CSR, Downlink MOS, Uplink MOS and Estimated MOS. Evidence: E04, E05, E06, E07	Passed



Criterion 2 evidence: The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

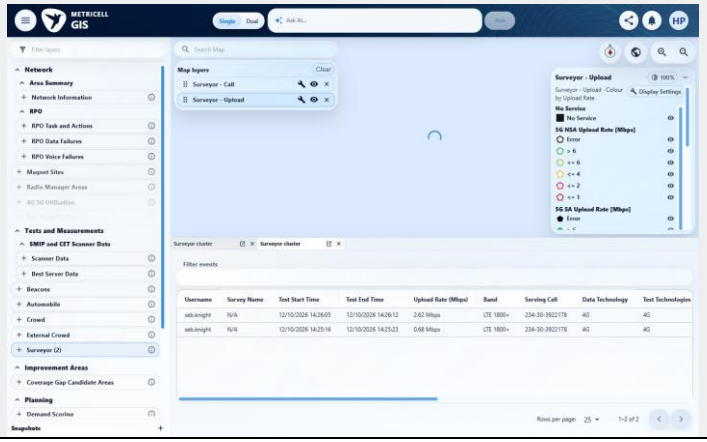E04 - Before open automobile (criterion-2-before-open-automobile.png)



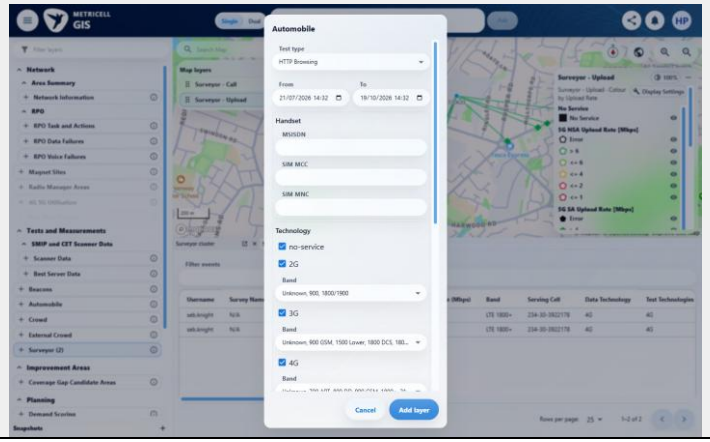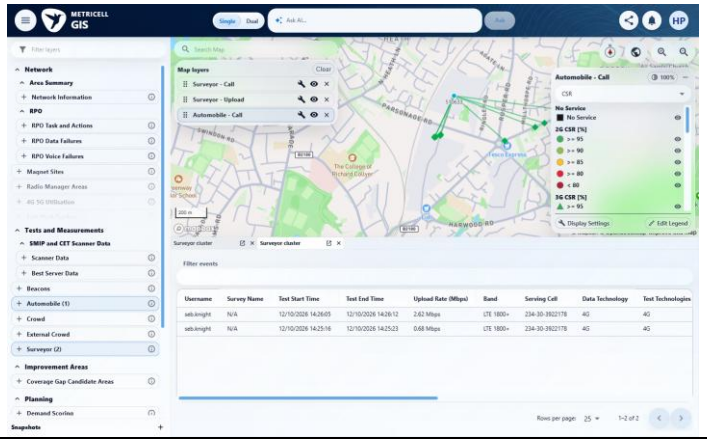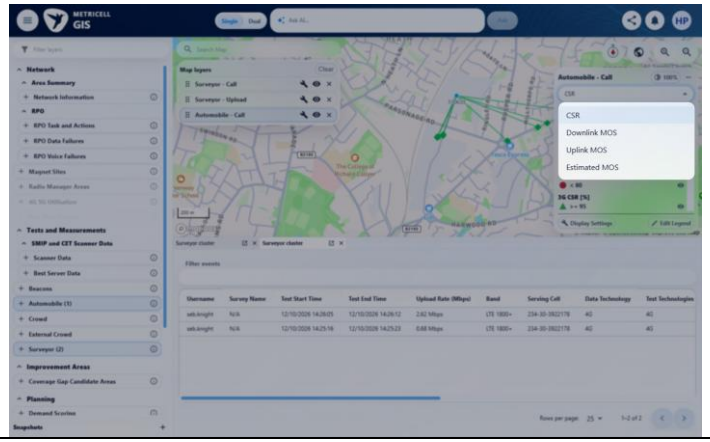E05 - Before select call (criterion-2-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 2 continued: The shared Colour By selector offers CSR, Downlink MOS, Uplink MOS, and Estimated MOS, with CSR selected by default. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E06 - After add call (criterion-2-after-add-call.png)**  **E07 - Final (criterion-2-final.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
3.0.0	For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.	For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.	criterion-3-final.png shows the Estimated MOS legend but no Call markers on the map. Reported Call points HTTP 500 prevents verifying metric-specific marker values and colours across all four modes. Evidence: E08, E09, E10, E11, E12, E13	Blocked


Criterion 3 evidence: For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores.





Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

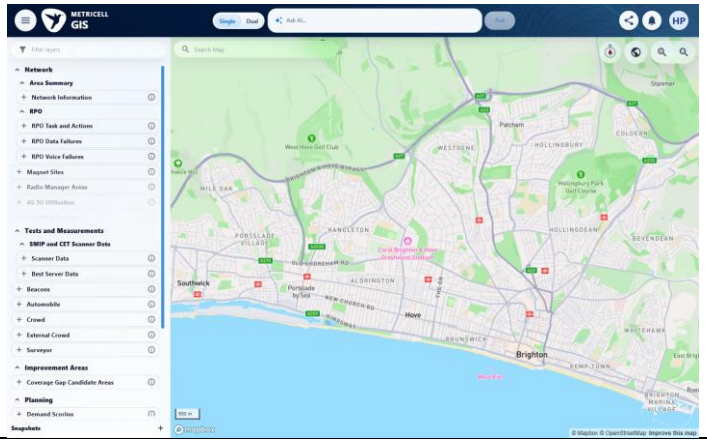E08 - Before open automobile (criterion-3-before-open-automobile.png)



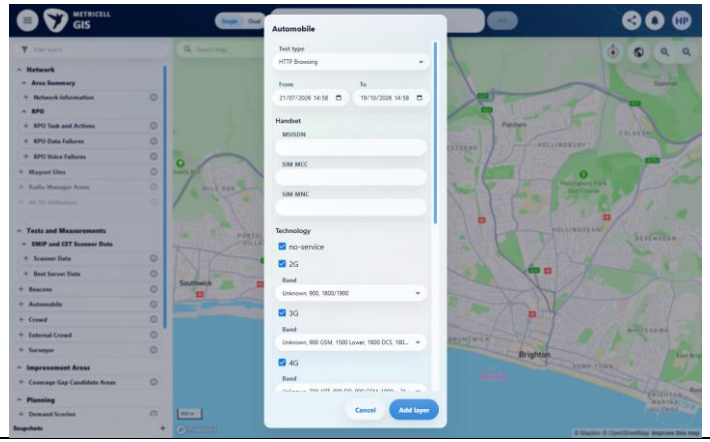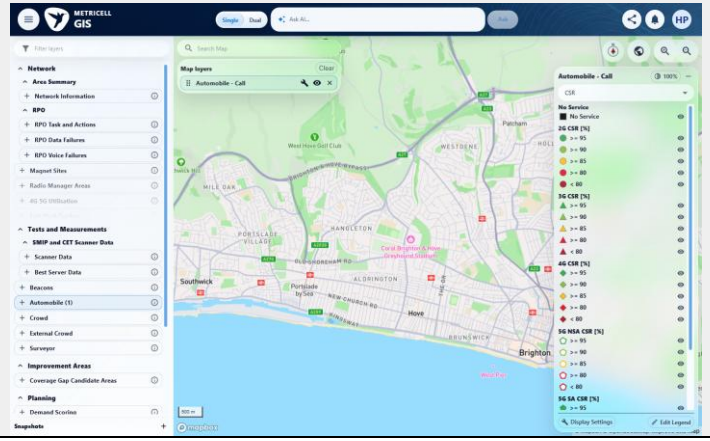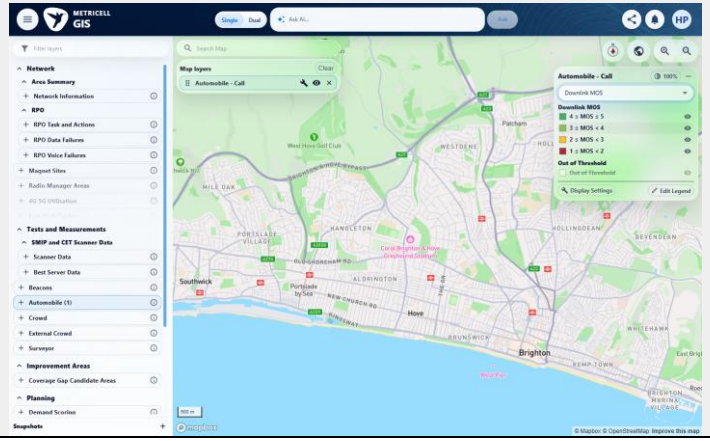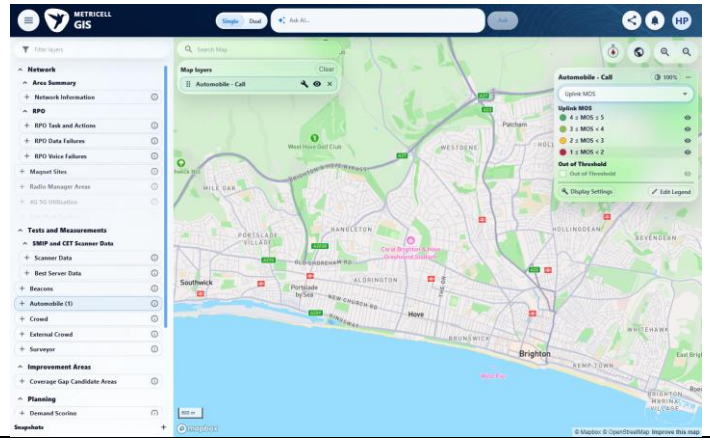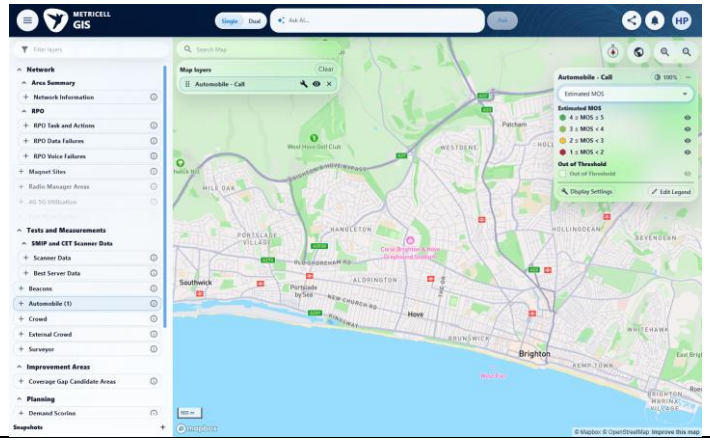E09 - Before select call (criterion-3-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 3 continued: For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E10 - After add call (criterion-3-after-add-call.png)**  **E11 - After downlink mos (criterion-3-after-downlink-mos.png)** 				
Criterion 3 continued: For each Colour By choice, visible Call markers use that metric's values and the legend shows its matching title, units, categories, and colours; CSR is shown as a percentage and MOS as dimensionless scores. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E12 - After uplink mos (criterion-3-after-uplink-mos.png)**  **E13 - Final (criterion-3-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
4.0.0	Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.	Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.	criterion-4-final.png shows a Call legend without an established selected Call result. Reported Call points HTTP 500 prevents establishing marker identities and selection for the required preservation comparison. Evidence: E08, E14, E15, E16	Blocked



Criterion 4 evidence: Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

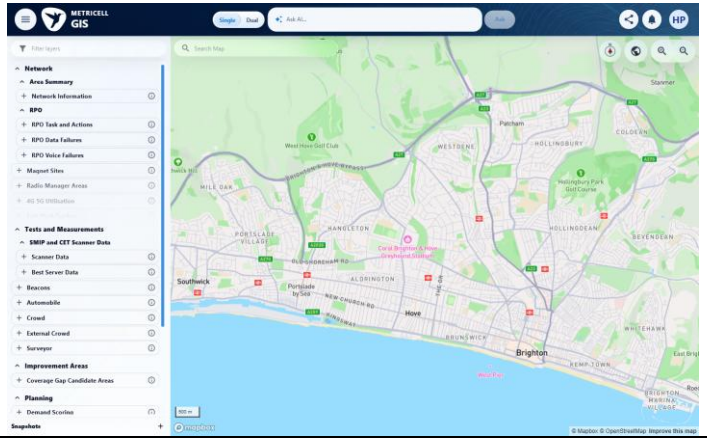E08 - Before open automobile (criterion-4-before-open-automobile.png)



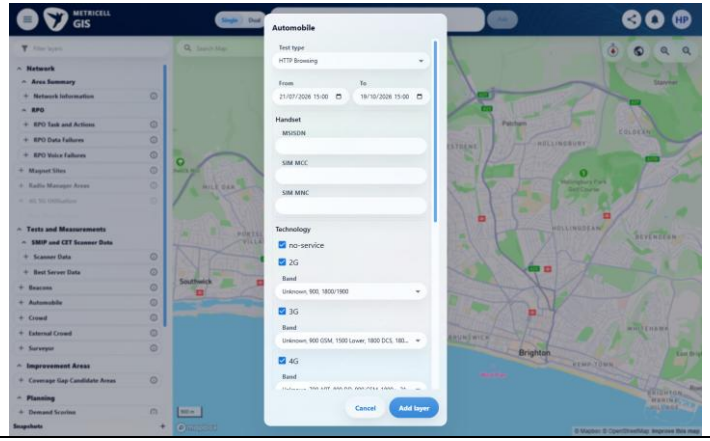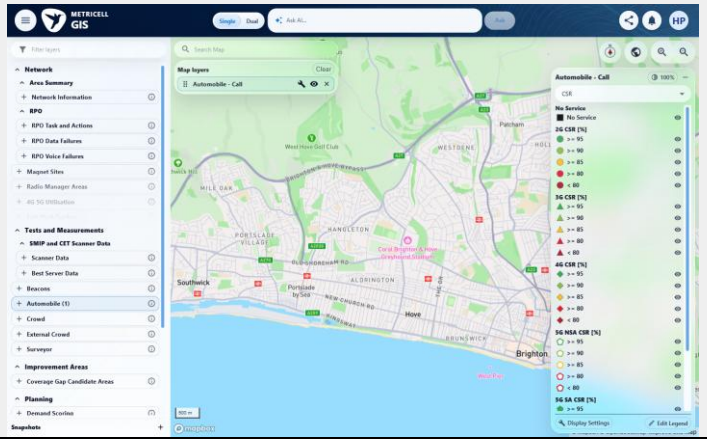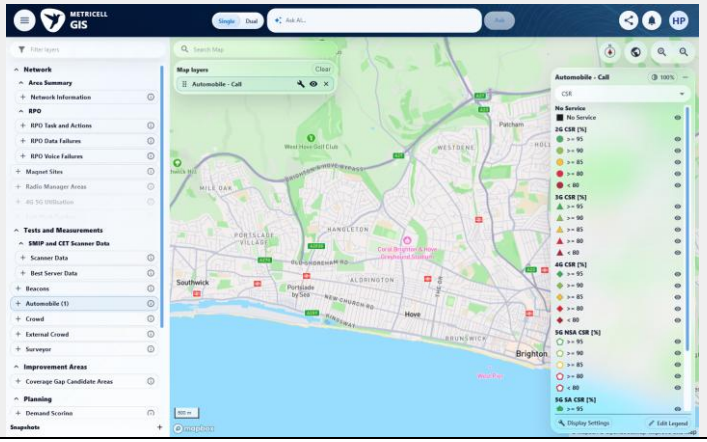E14 - Before select call (criterion-4-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 4 continued: Changing Colour By preserves the current date, filters, group visibility, marker identities, and selected result. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E15 - After add call (criterion-4-after-add-call.png)**  **E16 - Final (criterion-4-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
5.0.0	For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.	For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.	criterion-5-final.png shows the CSR legend with other layers present, without an identified multi-call marker or its counts. Reported Call points HTTP 500 leaves CSR denominators and independent MOS weighting unavailable. Evidence: E17, E18, E19, E20	Blocked

Criterion 5 evidence: For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

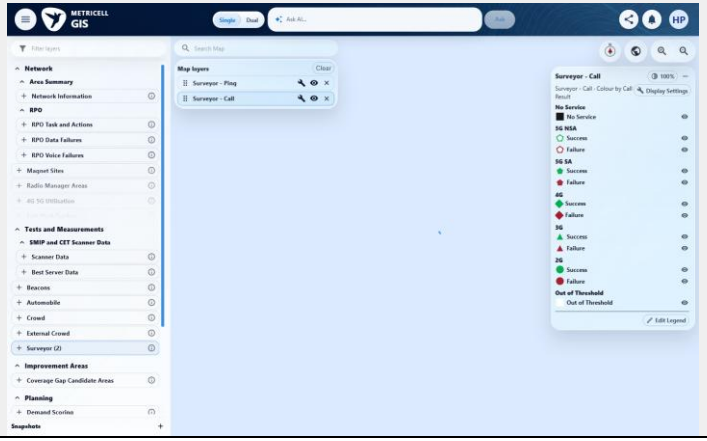E17 - Before open automobile (criterion-5-before-open-automobile.png)




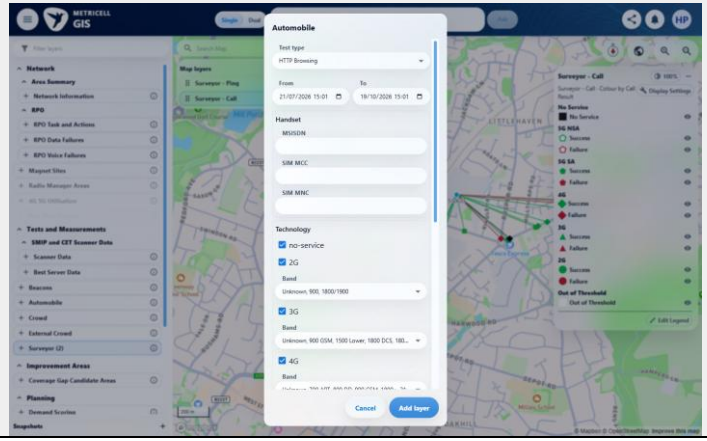E18 - Before select call (criterion-5-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 5 continued: For a marker representing multiple calls, CSR is 100 × successful calls divided by successful, setup-failed, operator-answered, no-service, and invalid calls; dropped calls are excluded and a zero denominator produces zero. Each MOS value is weighted by that metric's own valid sample count, and Estimated MOS uses its dedicated values rather than an average of Downlink and Uplink MOS. Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis				

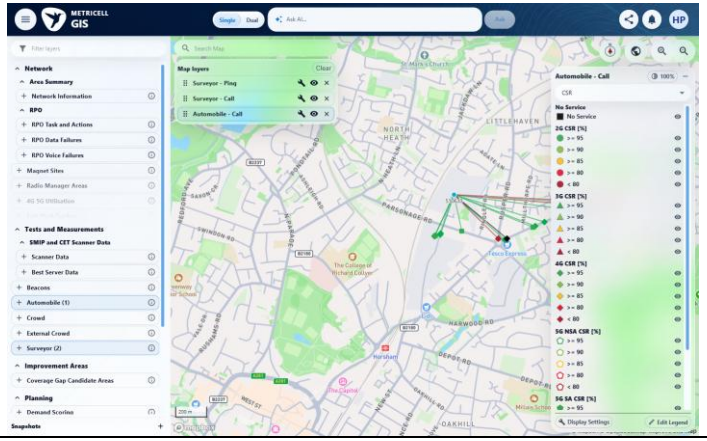E19 - After add call (criterion-5-after-add-call.png)




E20 - Final (criterion-5-final.png)

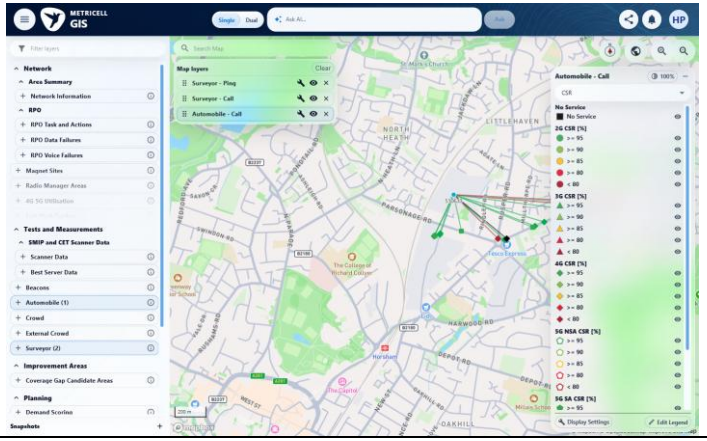


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
6.0.0	The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.	The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.	criterion-6-final.png shows descending CSR thresholds at 95, 90, 85 and 80 with coloured swatches. Reported Call points HTTP 500 prevents verifying actual classifications at exact boundaries; visible legend labels alone do not establish them. Evidence: E21, E22, E23	Blocked


Criterion 6 evidence: The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

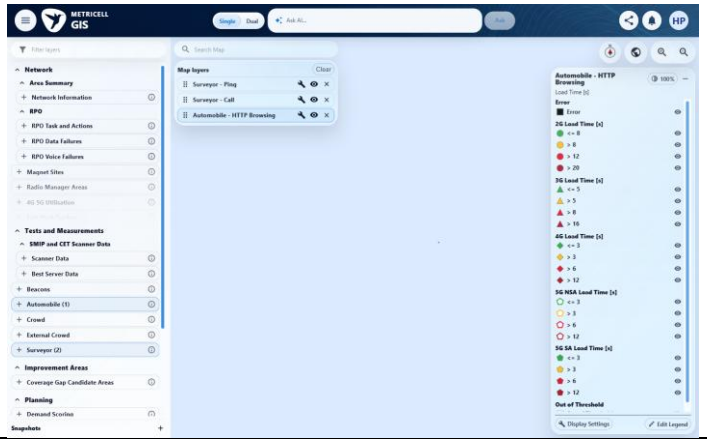E21 - Before open automobile (criterion-6-before-open-automobile.png)



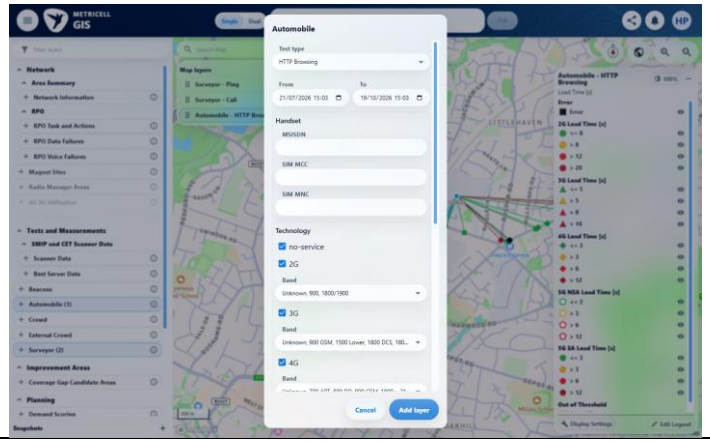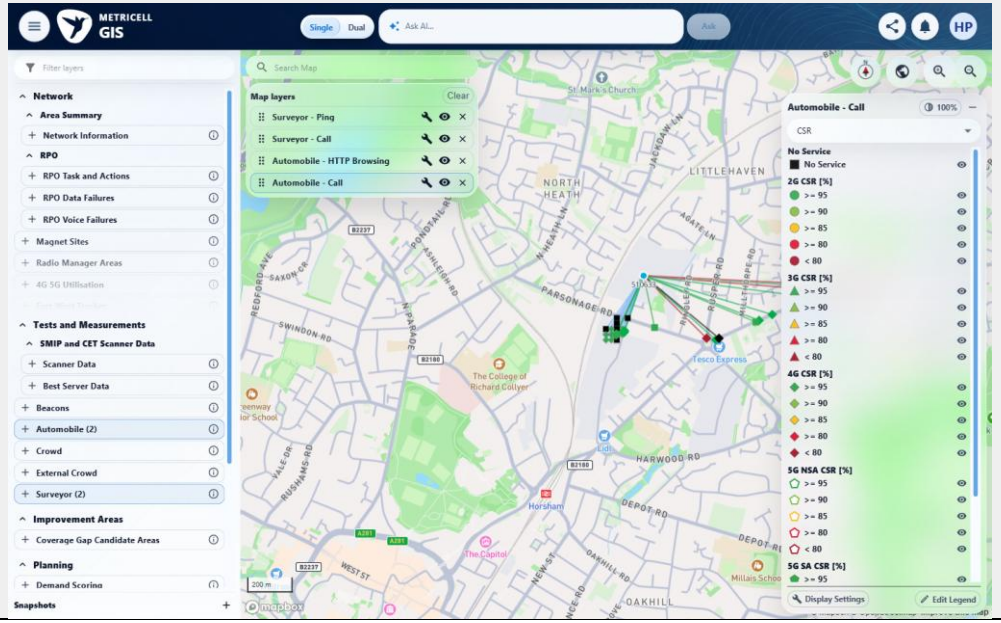E22 - Before select call (criterion-6-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 6 continued: The default CSR legend uses green #31AA4F for 95–100%, light green #86BE42 for 90–<95%, yellow #FCBF1A for 85–<90%, red #E61733 for 80–<85%, and dark red #AE1A32 for 0–<80%; exact boundaries use the higher band. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E23 - Final (criterion-6-final.png)** 

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
7.0.0	Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.	Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.	criterion-7-final.png shows Estimated MOS bands including 4 ≤ MOS ≤ 5. Reported Call points HTTP 500 prevents checking actual boundary marker classifications across the three MOS metrics. Evidence: E24, E25, E26, E27, E28, E29	Blocked


Criterion 7 evidence: Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band.





Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

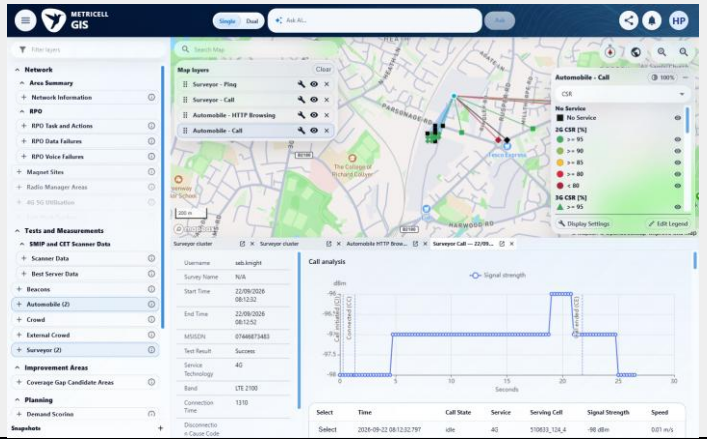E24 - Before open automobile (criterion-7-before-open-automobile.png)



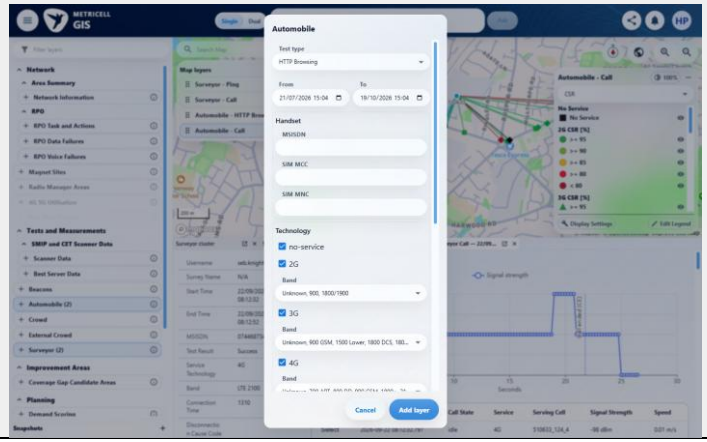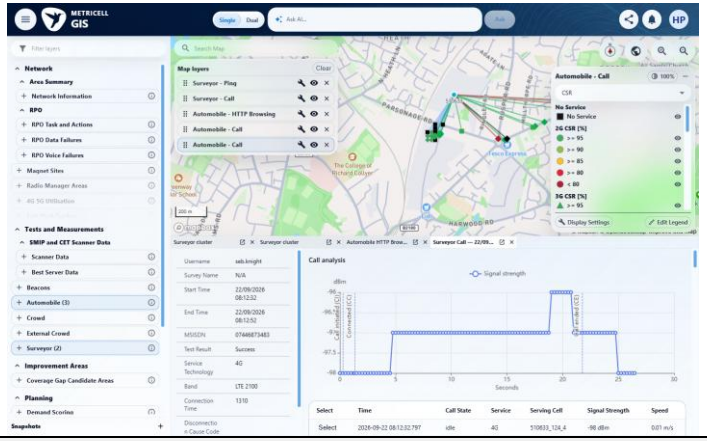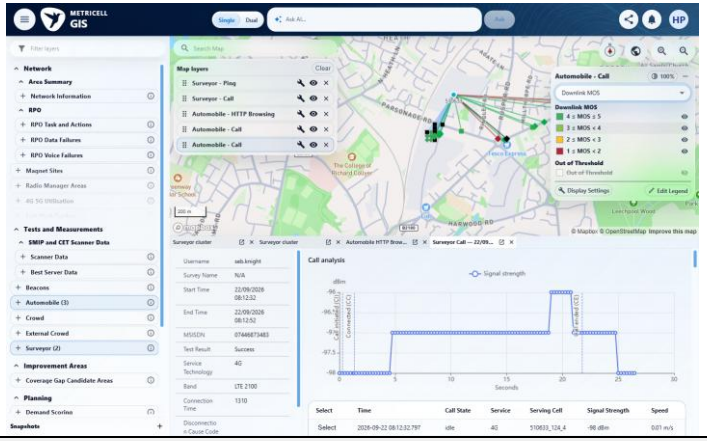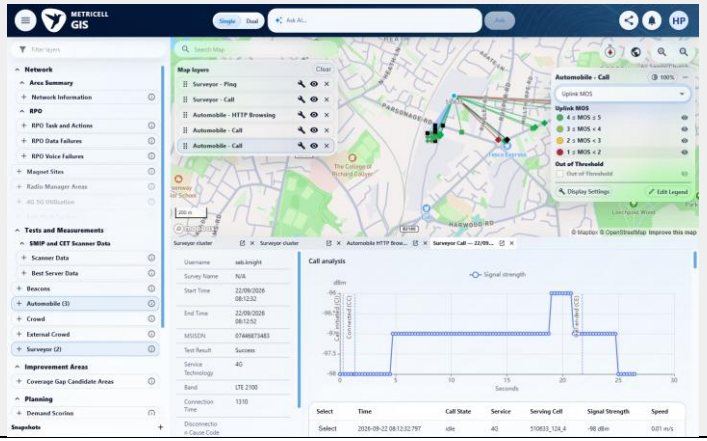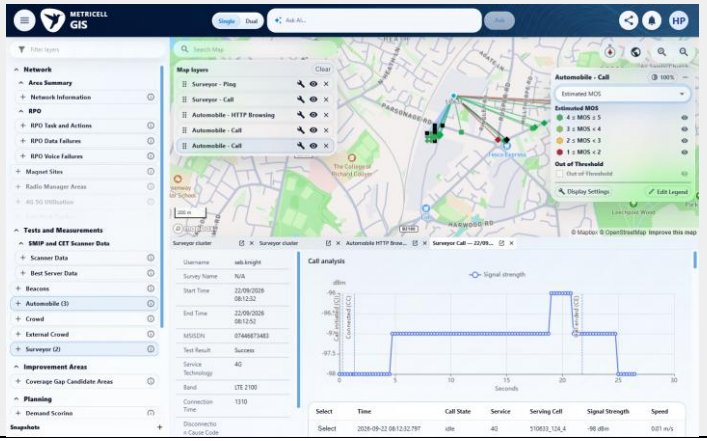E25 - Before select call (criterion-7-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 7 continued: Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E26 - After add call (criterion-7-after-add-call.png)**  **E27 - After downlink mos (criterion-7-after-downlink-mos.png)** 				
Criterion 7 continued: Each default MOS legend uses dark red #AE1A32 for 1–<2, yellow #FCBF1A for 2–<3, light green #86BE42 for 3–<4, and green #31AA4F for 4–5 inclusive; exact internal boundaries use the higher band. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E28 - After uplink mos (criterion-7-after-uplink-mos.png)**  **E29 - Final (criterion-7-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
8.0.0	When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.	When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.	criterion-8-final.png shows Downlink MOS bands and a hidden white Out of Threshold category. Reported Call points HTTP 500 prevents obtaining missing-sample and out-of-band results to assess unavailable values and substitution. Evidence: E30, E31, E26, E27	Blocked



Criterion 8 evidence: When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

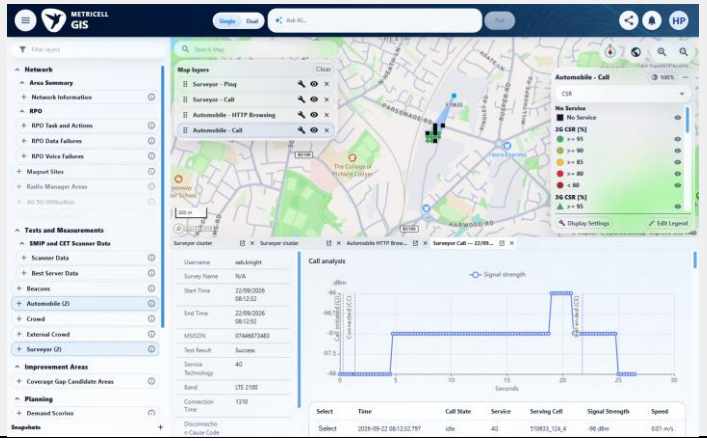E30 - Before open automobile (criterion-8-before-open-automobile.png)



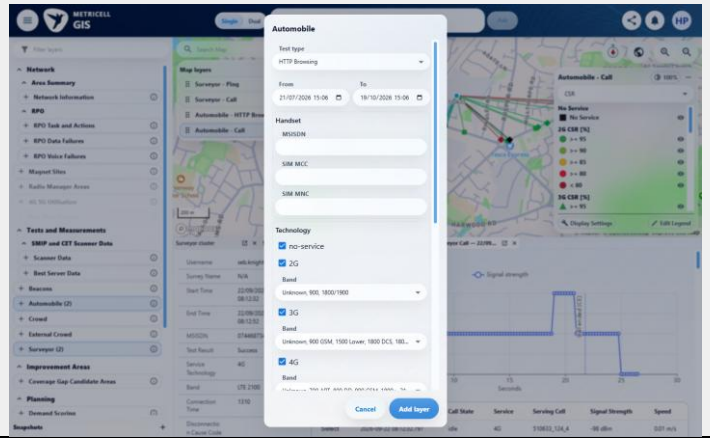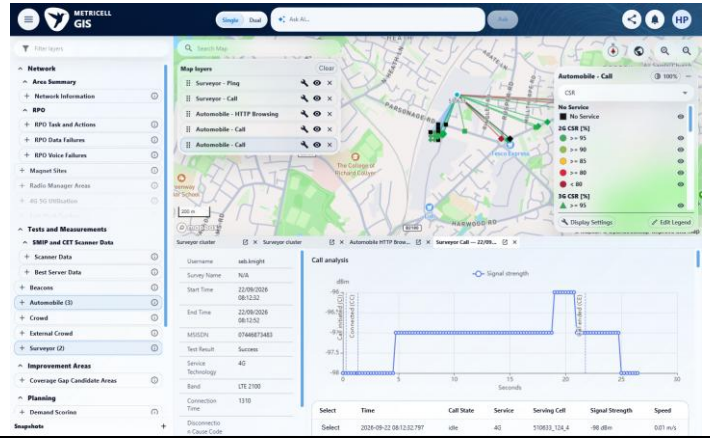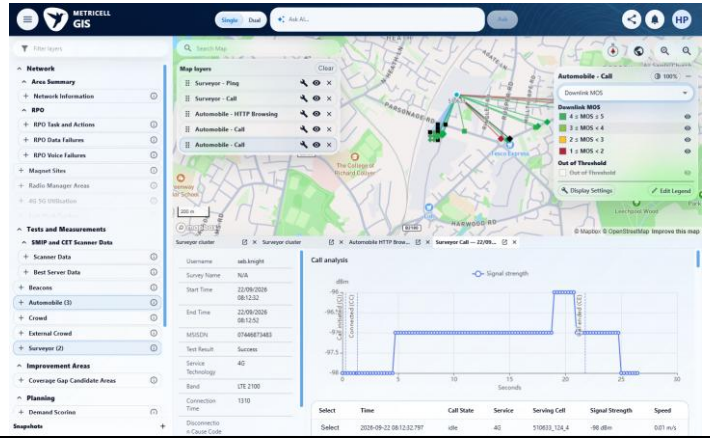E31 - Before select call (criterion-8-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 8 continued: When the selected MOS metric has no valid samples, it is unavailable rather than shown as zero or replaced by another metric; values outside its bands use the white, initially hidden Out of Threshold category, with no separate Not Tested category. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E26 - After add call (criterion-8-after-add-call.png)**  **E27 - Final (criterion-8-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
9.0.0	The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.	The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.	criterion-9-after-open-edit-legend.png and criterion-9-final.png show a separate black-square No Service category, 2G circles and 3G triangles. The criterion-owned images do not expose complete 4G and 5G SA generation groups; DOM assertions alone cannot establish the full visual requirement. Evidence: E32, E33, E34, E35, E36, E37	Failed





Criterion 9 evidence: The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

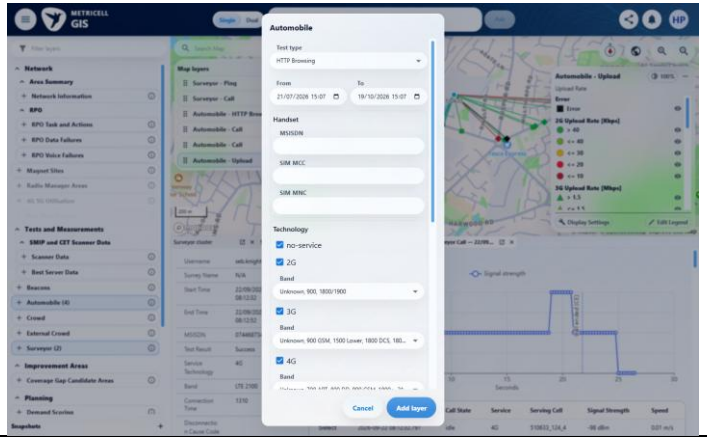E32 - Before select call (criterion-9-before-select-call.png)



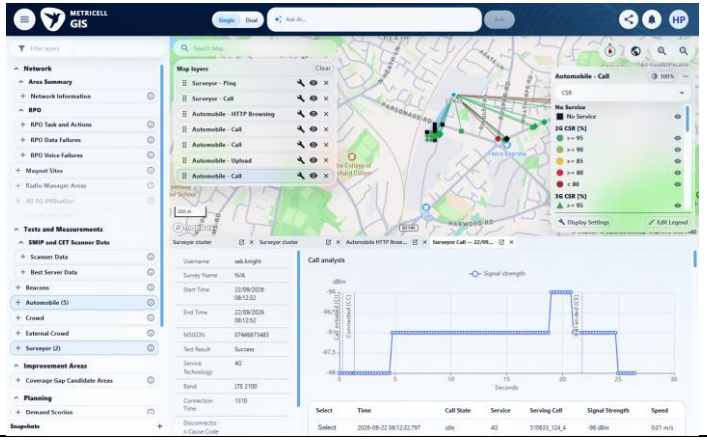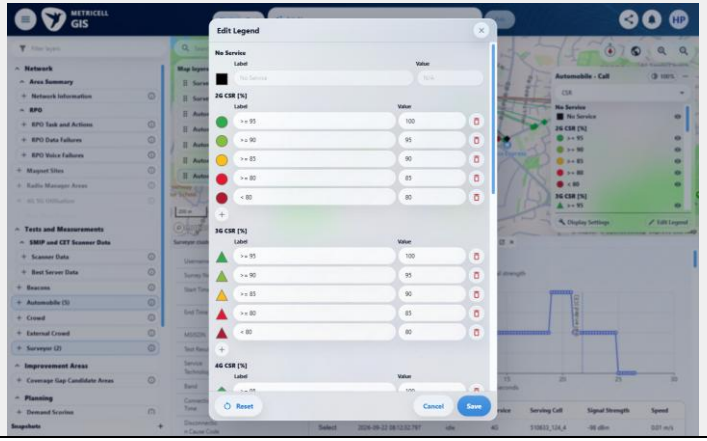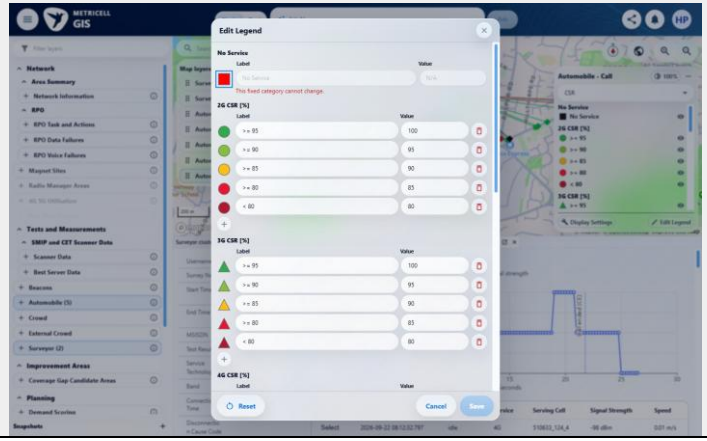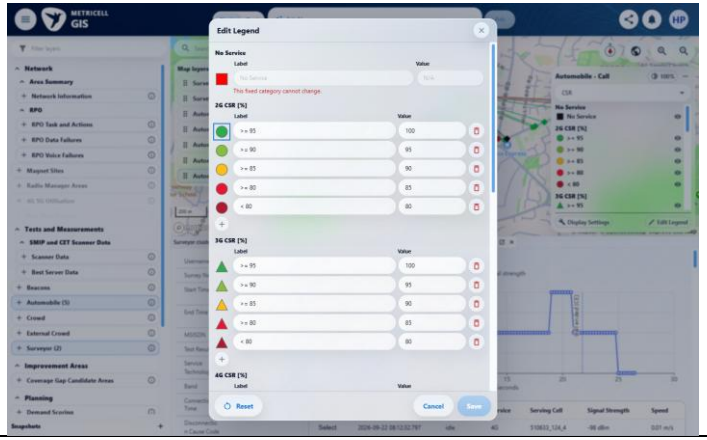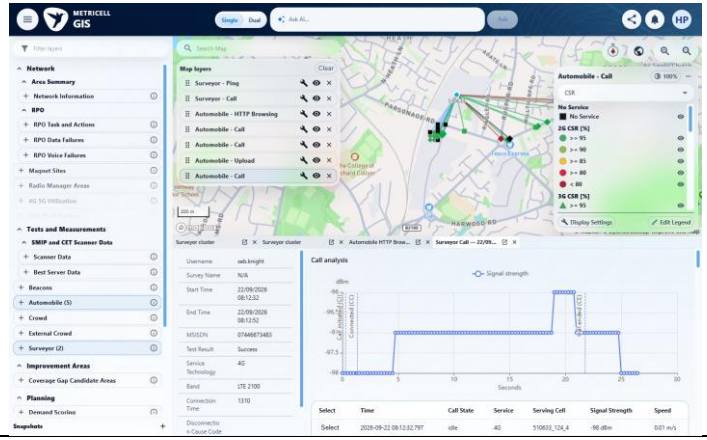E33 - After add call (criterion-9-after-add-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 9 continued: The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E34 - After open edit legend (criterion-9-after-open-edit-legend.png)**  **E35 - After change no service colour (criterion-9-after-change-no-service-colour.png)** 				
Criterion 9 continued: The CSR legend shows 2G circles, 3G triangles, 4G diamonds, 5G SA pentagons, and a fixed black-square No Service category for generation 0; No Service is separate from CSR percentage bands. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E36 - After colour attempt save disabled (criterion-9-after-colour-attempt-save-disabled.png)**  **E37 - Final (criterion-9-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
10.0.0	The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.	The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.	criterion-10-after-downlink-mos.png, criterion-10-after-uplink-mos.png and criterion-10-after-estimated-mos.png visibly show squares, circles and hexagons respectively, with a single matching metric heading in each legend. Evidence: E38, E39, E40, E41, E42, E43	Passed





Criterion 10 evidence: The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

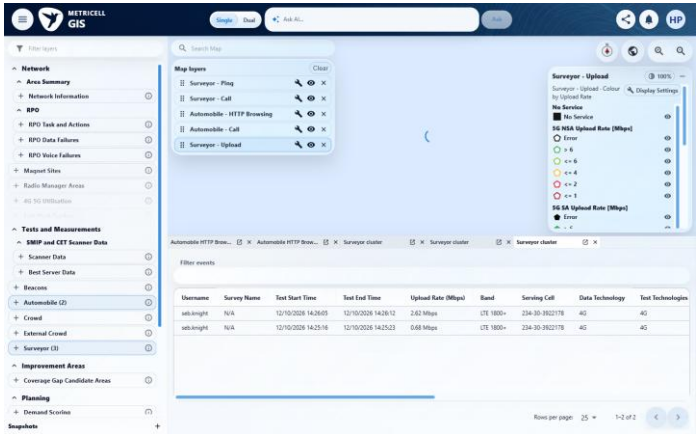E38 - Before open automobile (criterion-10-before-open-automobile.png)



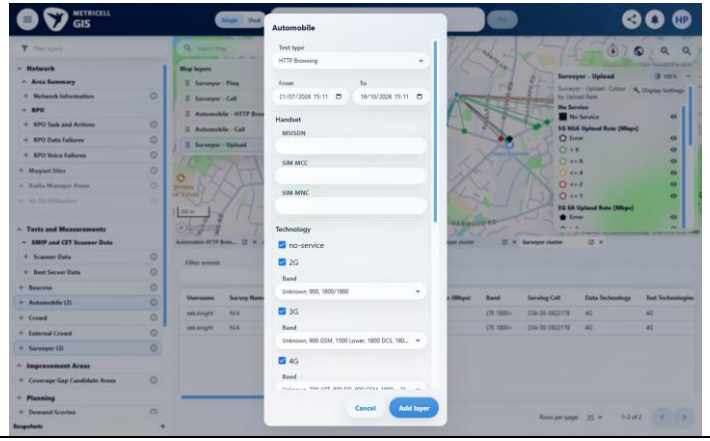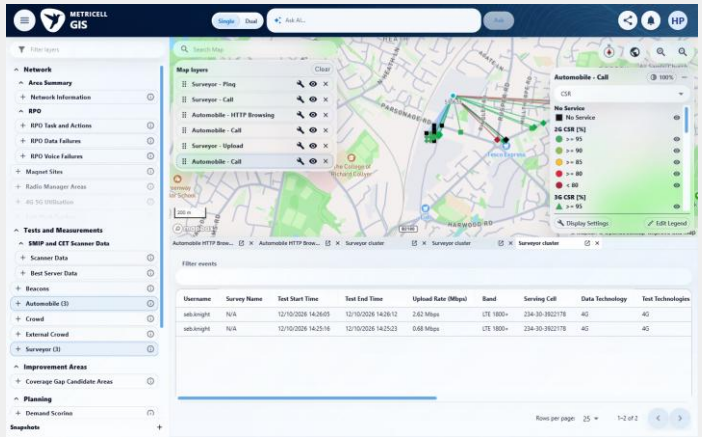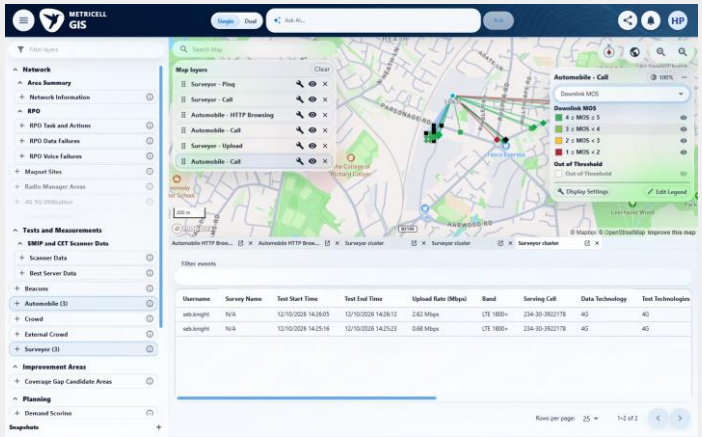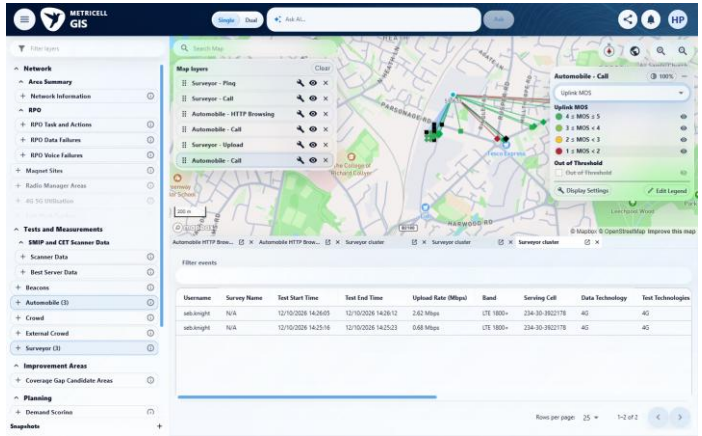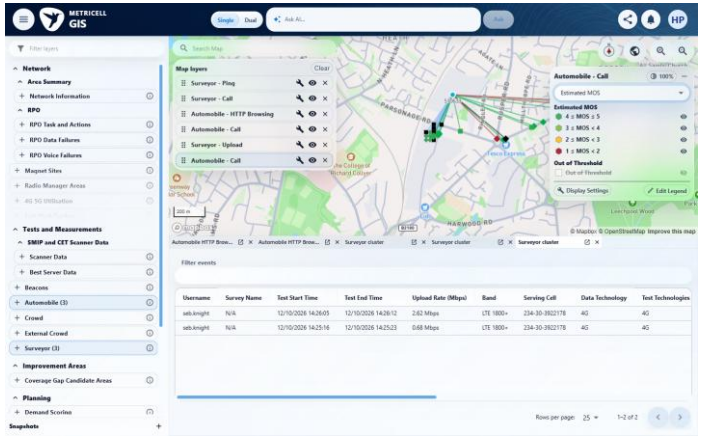E39 - Before select call (criterion-10-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 10 continued: The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E40 - After add call (criterion-10-after-add-call.png)** 			**E41 - After downlink mos (criterion-10-after-downlink-mos.png)** 	
Criterion 10 continued: The MOS legends use squares for Downlink MOS, circles for Uplink MOS, and hexagons for Estimated MOS, grouping by the selected metric. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E42 - After uplink mos (criterion-10-after-uplink-mos.png)** 			**E43 - Final (criterion-10-final.png)** 	

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
11.0.0	Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.	Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.	criterion-11-final.png shows descending Estimated MOS bands and a hidden white-square Out of Threshold category. Reported Call points HTTP 500 prevents checking agreement of displayed labels with actual boundary classification; the complete criterion cannot be established from legends alone. Evidence: E44, E45, E46, E47, E48, E49, E50, E51	Blocked


Criterion 11 evidence: Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour.





Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis


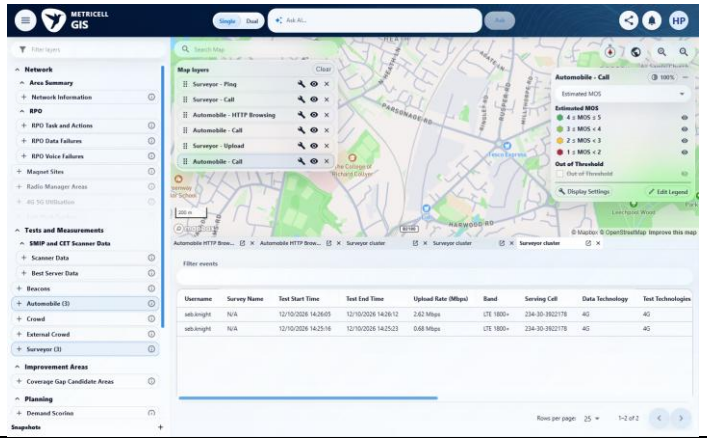
E44 - Before open automobile (criterion-11-before-open-automobile.png)



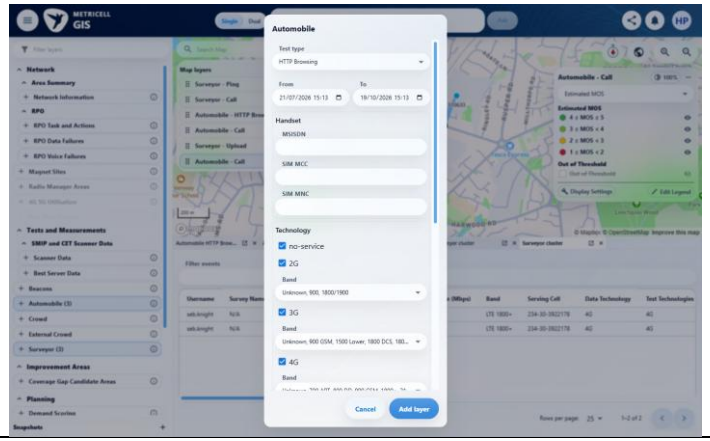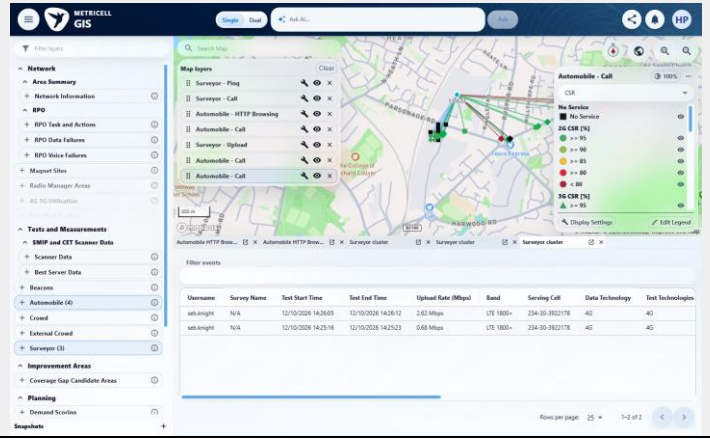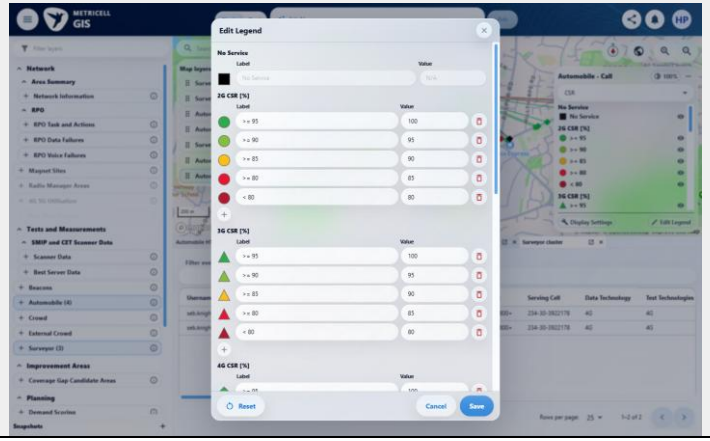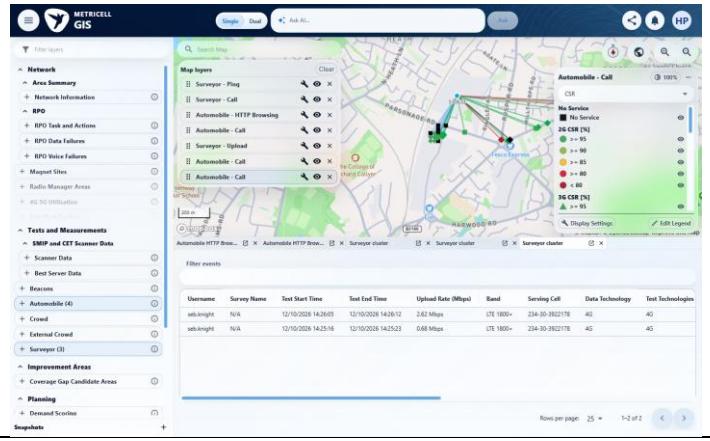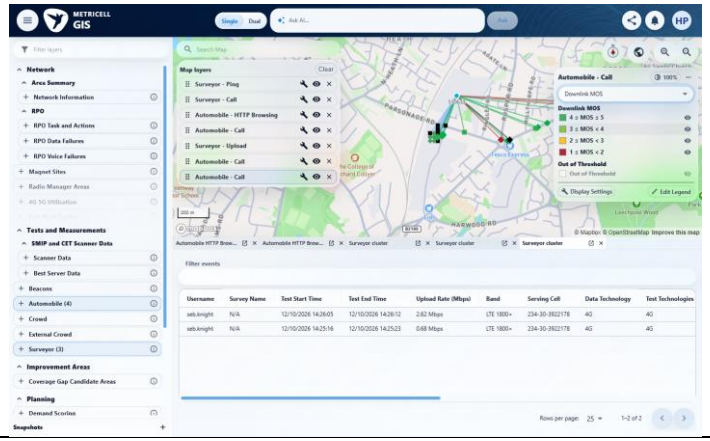E45 - Before select call (criterion-11-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 11 continued: Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E46 - After add call (criterion-11-after-add-call.png)**  **E47 - Csr edit controls (criterion-11-csr-edit-controls.png)** 				
Criterion 11 continued: Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E48 - After cancel csr edit (criterion-11-after-cancel-csr-edit.png)**  **E49 - After downlink mos (criterion-11-after-downlink-mos.png)** 				

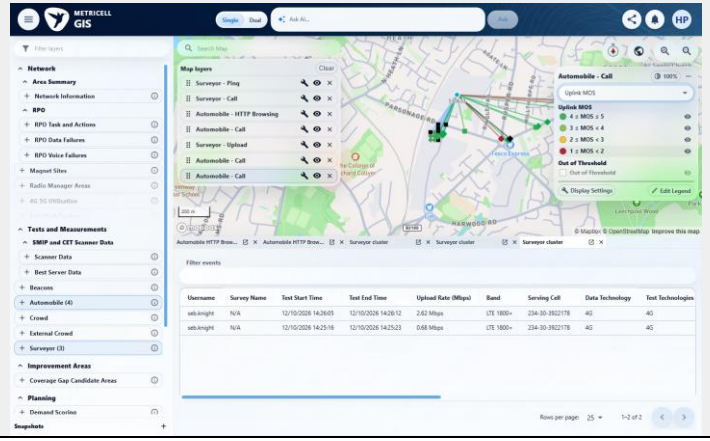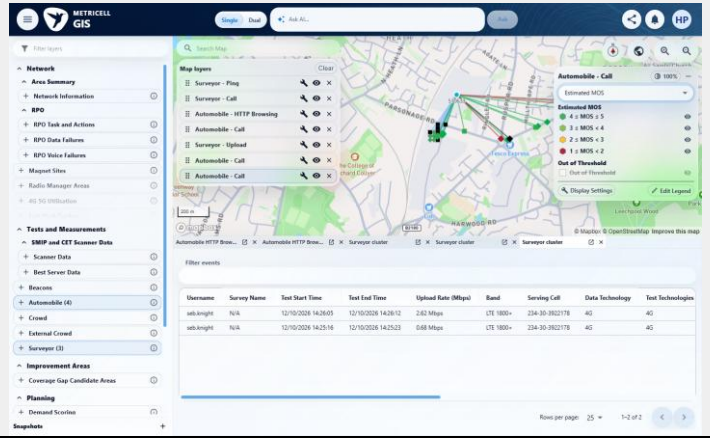ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 11 continued: Each Call legend includes a fixed white-square Out of Threshold category hidden by default; bands are ordered descending, with CSR limits 0–100 and MOS limits 1–5, and displayed labels match the boundary behaviour. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E50 - After uplink mos (criterion-11-after-uplink-mos.png)**  **E51 - Final (criterion-11-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
12.0.0	Editing a metric's customisable bands, labels, marker size, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.	Editing a metric's customisable bands, labels, marker size, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.	criterion-12-final.png shows the Call legend without an established matching Call marker baseline or completed edit sequence. Reported Call points HTTP 500 blocks marker-update and metric/layer-specific comparison. Evidence: E52, E53, E54, E55	Blocked



Criterion 12 evidence: Editing a metric's customisable bands, labels, marker size, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

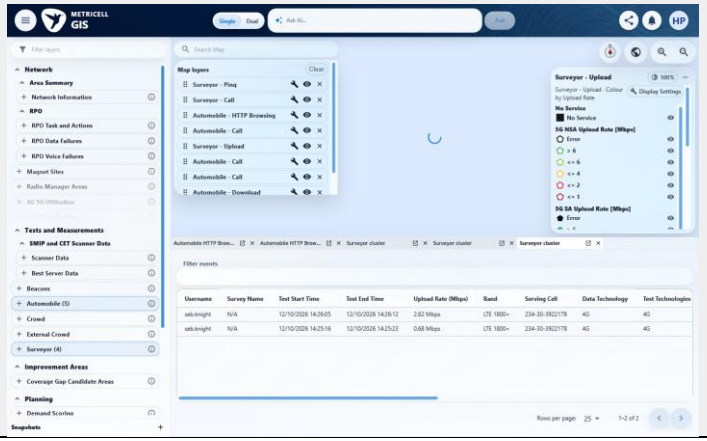E52 - Before open automobile (criterion-12-before-open-automobile.png)



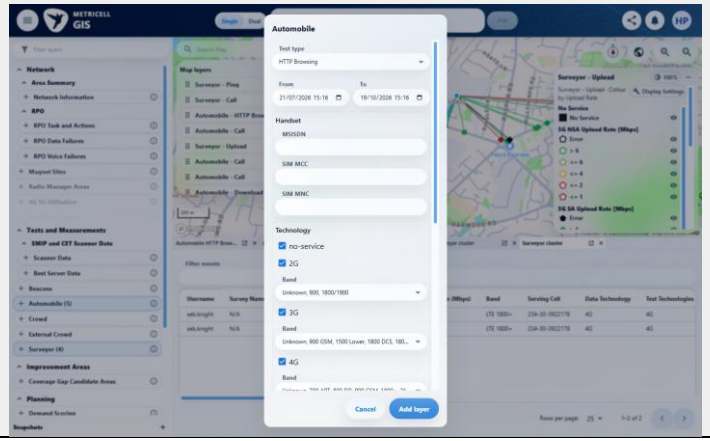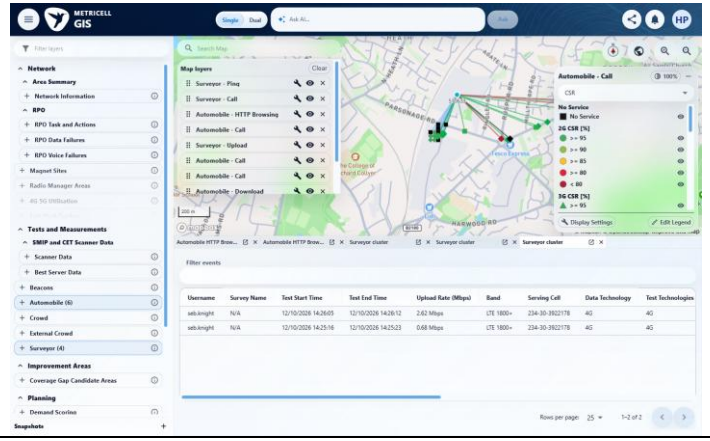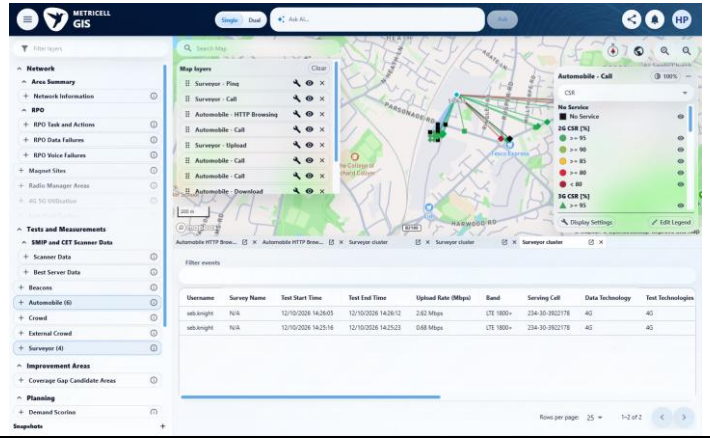E53 - Before select call (criterion-12-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 12 continued: Editing a metric's customisable bands, labels, marker size, or category visibility updates its Call markers and remains specific to that metric and layer instance when Colour By changes; No Service and Out of Threshold definitions cannot be edited. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E54 - After add call (criterion-12-after-add-call.png)**  **E55 - Final (criterion-12-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
13.0.0	Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.	Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.	criterion-13-final.png shows CSR selected, without a Call restoration sequence. The tester reports no available legacy saved Call configuration lacking Colour By; this required fallback fixture is unavailable, and a new layer's CSR selection does not prove restoration. Evidence: E56, E57, E58	Blocked

Criterion 13 evidence: Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

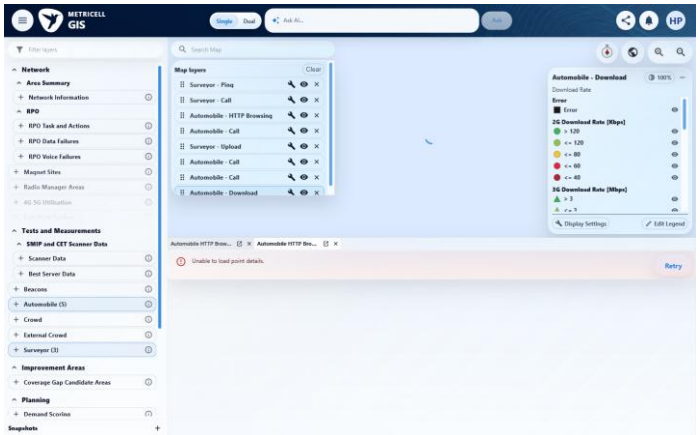
E56 - Before open automobile (criterion-13-before-open-automobile.png)



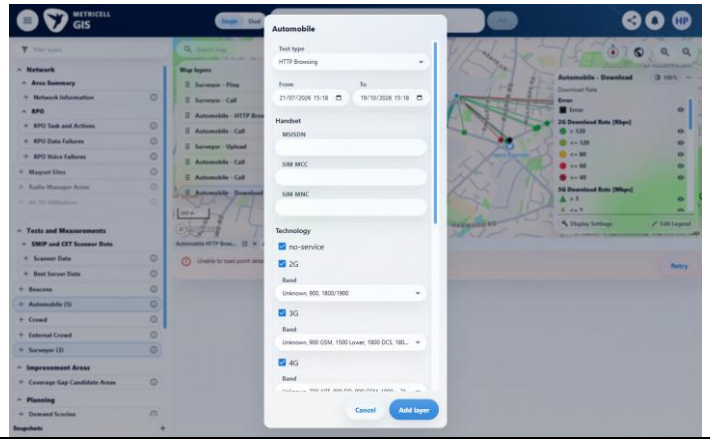E57 - Before select call (criterion-13-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 13 continued: Restoring a Call layer or saved GIS view restores its Colour By choice and associated legend settings; a saved configuration without a choice opens with CSR selected. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E58 - Final (criterion-13-final.png)**				

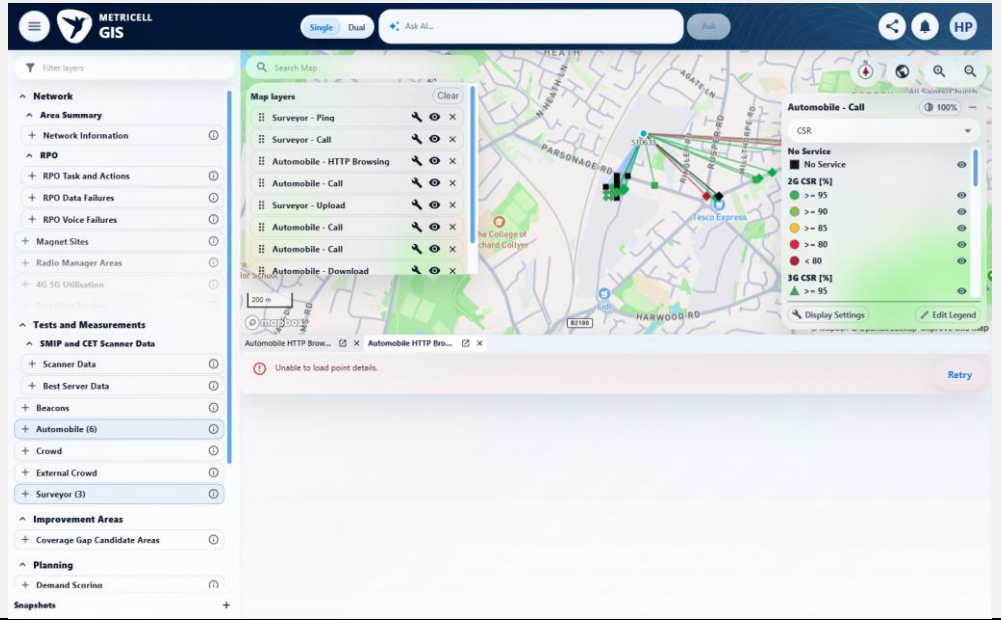


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
14.0.0	Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.	Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.	criterion-14-final.png displays Surveyor cluster content, without a demonstrated single or clustered Automobile Call selection. Reported Call points HTTP 500 blocks the required Call marker prerequisites. Evidence: E59, E60, E61, E62	Blocked



Criterion 14 evidence: Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

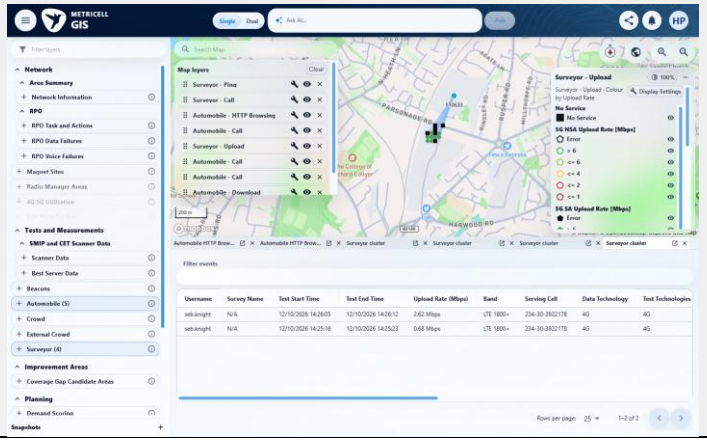E59 - Before open automobile (criterion-14-before-open-automobile.png)



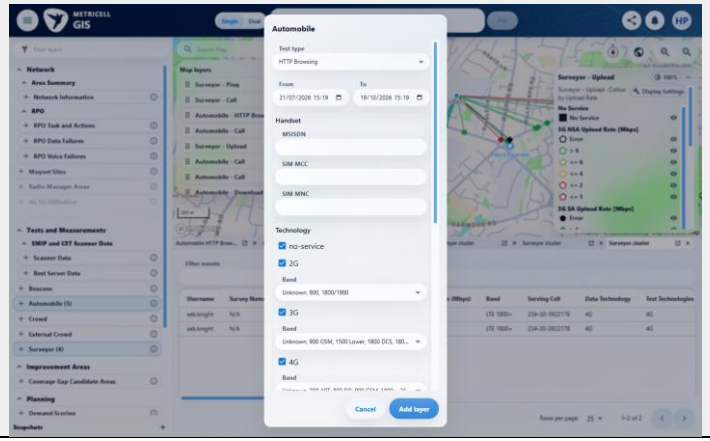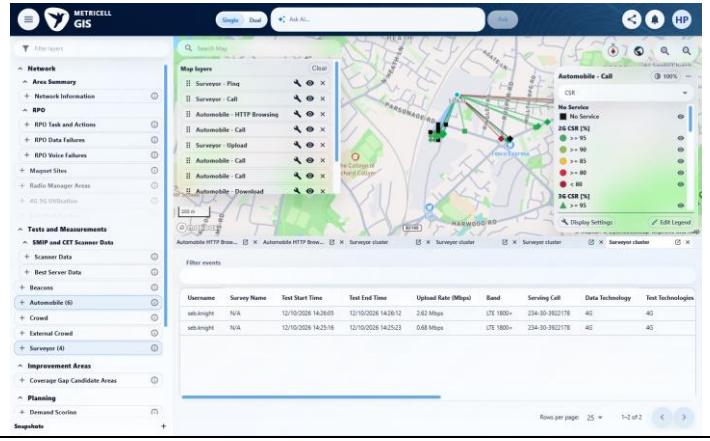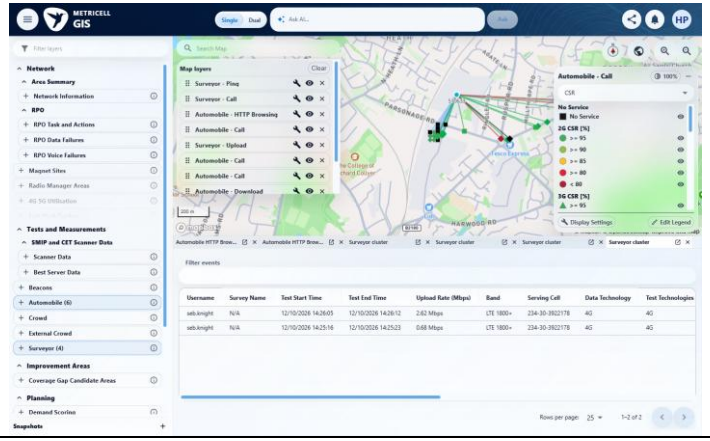E60 - Before select call (criterion-14-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 14 continued: Selecting a Call marker opens its Call detail tab directly when it represents one result, or opens a cluster results tab when it represents multiple results, following the HTTP and Download GIS workflow and existing group-based visibility. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E61 - After add call (criterion-14-after-add-call.png)**  **E62 - Final (criterion-14-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
15.0.0	The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.	The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.	criterion-15-final.png displays a Surveyor table rather than an Automobile Call cluster. Reported Call points HTTP 500 prevents opening the required Call table and inspecting its specified columns. Evidence: E59, E63, E61, E62	Blocked



Criterion 15 evidence: The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

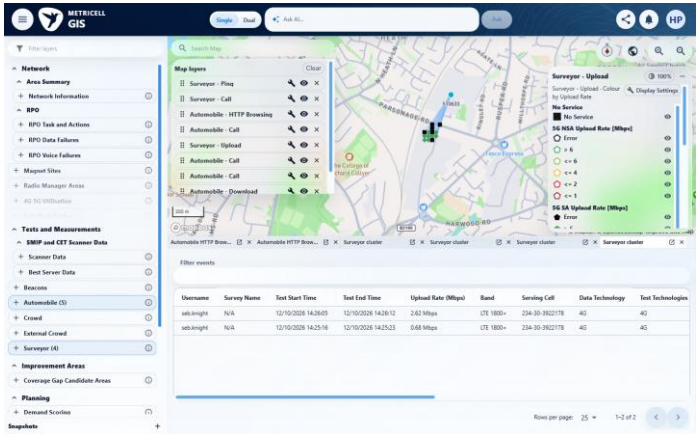E59 - Before open automobile (criterion-15-before-open-automobile.png)



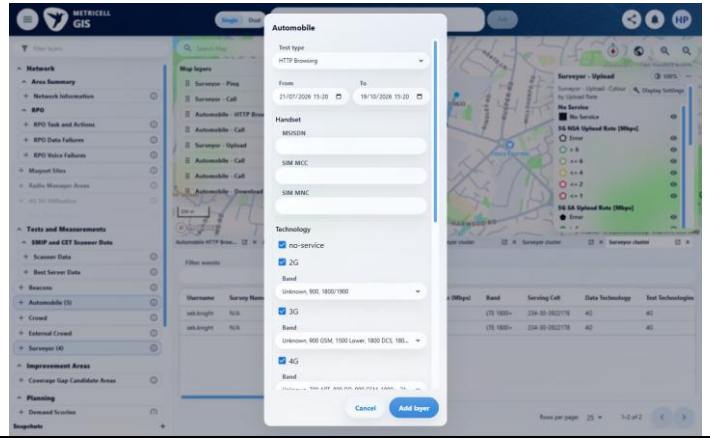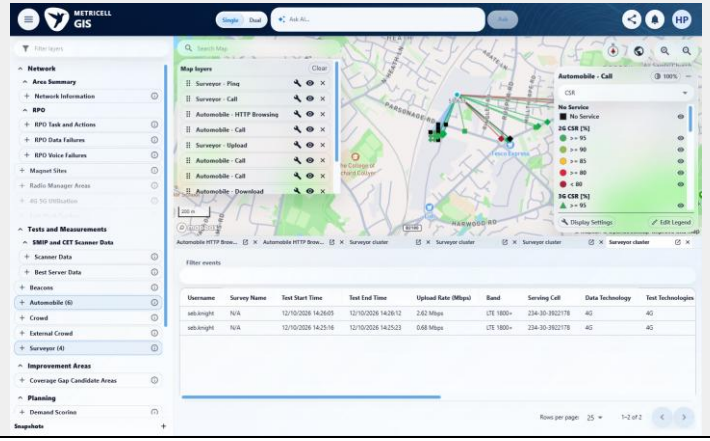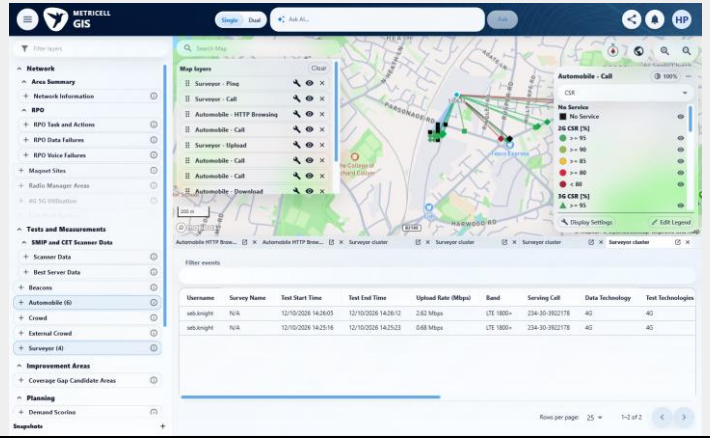E63 - Before select call (criterion-15-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 15 continued: The cluster results table displays MSISDN, Test Result, Start Time, End Time, Test Duration, Call Setup Time, Connection Time, Disconnection Cause Code, LTE Return Time, CSFB Time, MOS Downlink, MOS Uplink, Estimated MOS, Band, Test Technologies, Call End Service, and Call End Serving Cell. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E61 - After add call (criterion-15-after-add-call.png)**  **E62 - Final (criterion-15-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
16.0.0	Each available column in the cluster results table can be sorted.	Each available column in the cluster results table can be sorted.	criterion-16-final.png displays a Surveyor table, without a Call cluster table available to sort. Reported Call points HTTP 500 blocks testing each available Call column. Evidence: E59, E64, E61, E62	Blocked



Criterion 16 evidence: Each available column in the cluster results table can be sorted.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

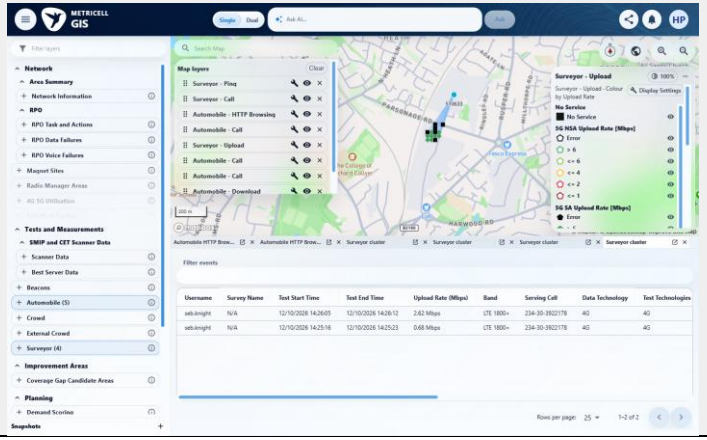E59 - Before open automobile (criterion-16-before-open-automobile.png)



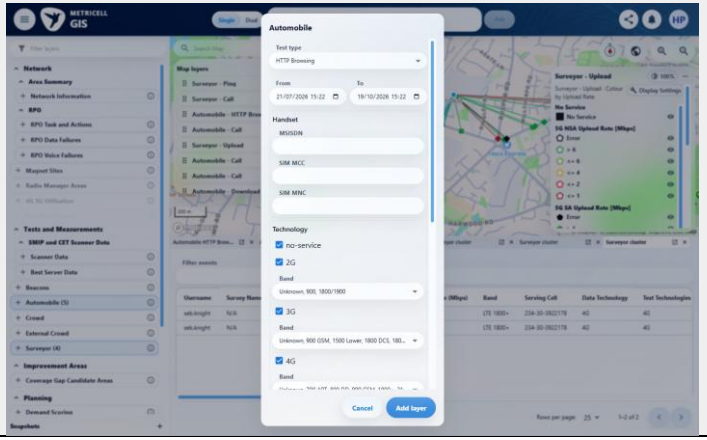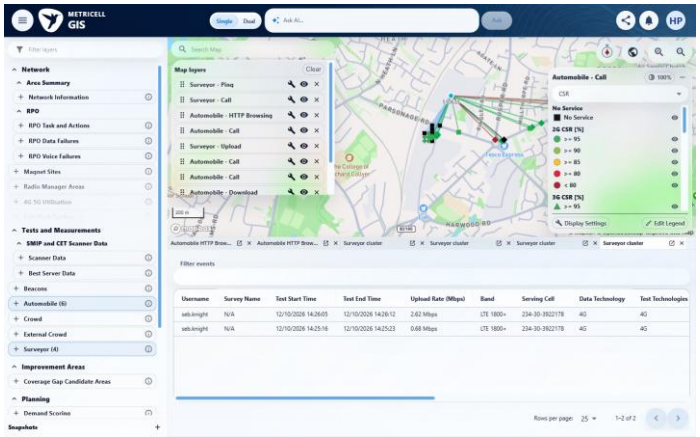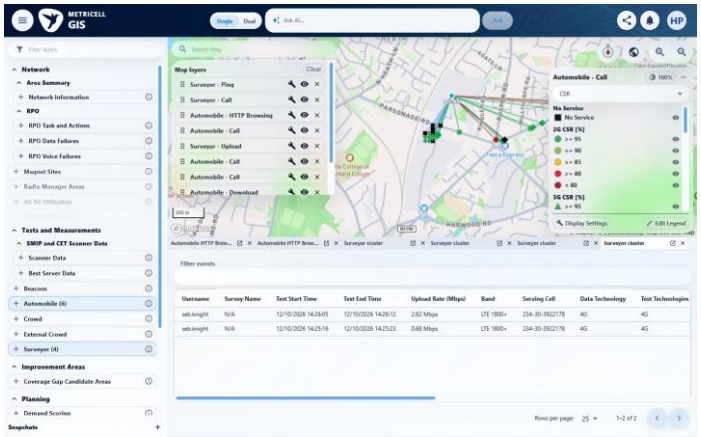E64 - Before select call (criterion-16-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 16 continued: Each available column in the cluster results table can be sorted. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E61 - After add call (criterion-16-after-add-call.png)**  **E62 - Final (criterion-16-final.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
17.0.0	Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.	Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.	criterion-17-final.png shows Surveyor cluster tabs without a demonstrated Call cluster row or exact PointID-bearing Call detail. Reported Call points HTTP 500 blocks the selection, retained cluster and Call/Service restoration sequence. Evidence: E65, E66, E61, E62	Blocked


Criterion 17 evidence: Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope.



Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

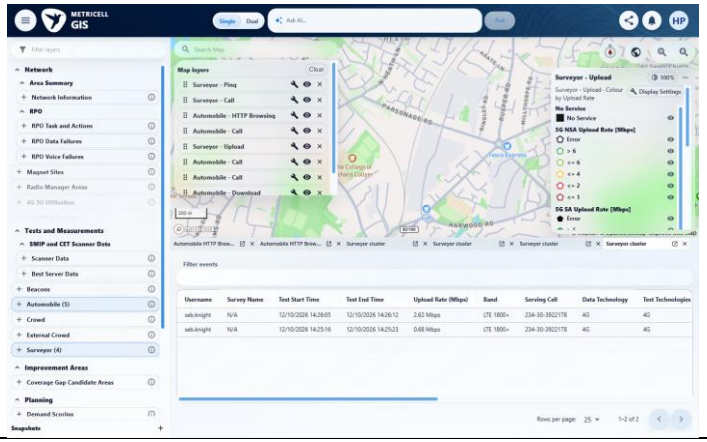E65 - Before open automobile (criterion-17-before-open-automobile.png)



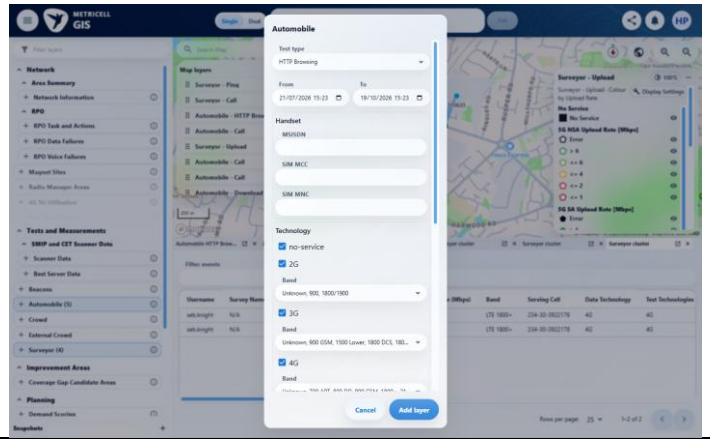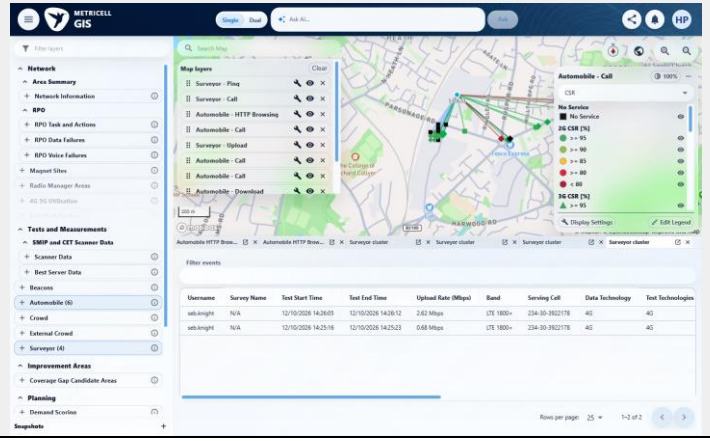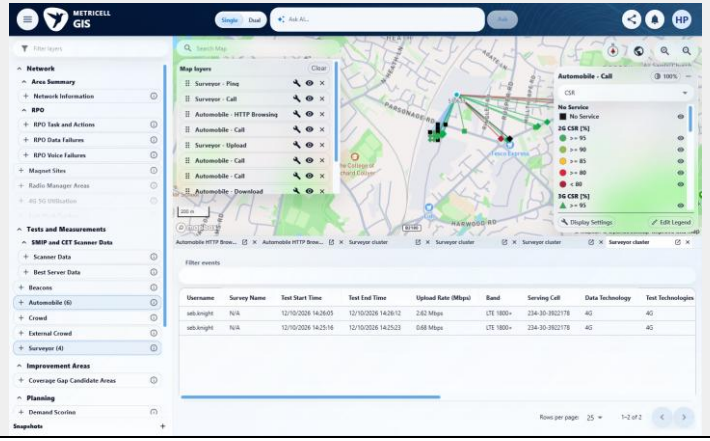E66 - Before select call (criterion-17-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 17 continued: Selecting a cluster row opens a separate Call detail tab for that row's exact PointID and keeps the cluster tab open; reopening or restoring Call and Service tabs retains the relevant time and filter scope. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E61 - After add call (criterion-17-after-add-call.png)**  **E62 - Final (criterion-17-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
18.0.0	When a selected result has related service information, its Service Details tab can be opened.	When a selected result has related service information, its Service Details tab can be opened.	criterion-18-final.png shows Surveyor cluster content without a selected Call result or related Service Details. Reported Call points HTTP 500 prevents establishing the required service-bearing Call result. Evidence: E67, E68, E61, E62	Blocked



Criterion 18 evidence: When a selected result has related service information, its Service Details tab can be opened.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

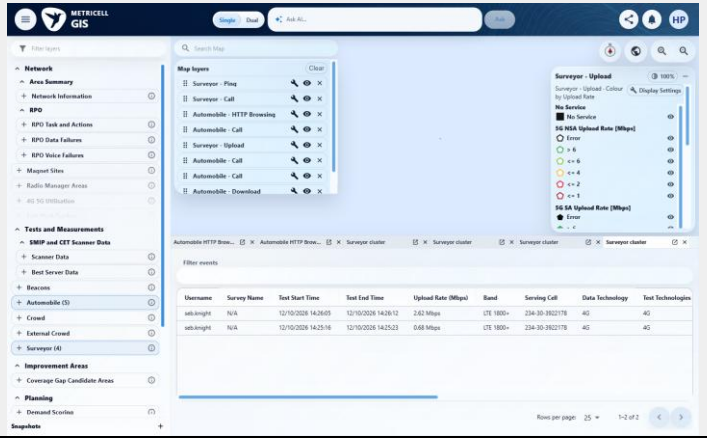E67 - Before open automobile (criterion-18-before-open-automobile.png)



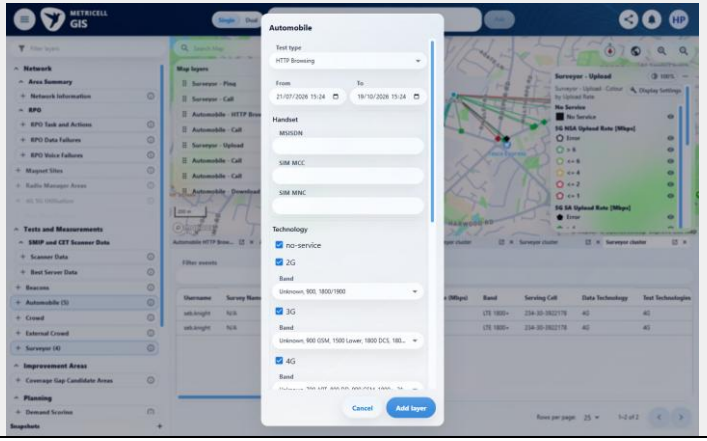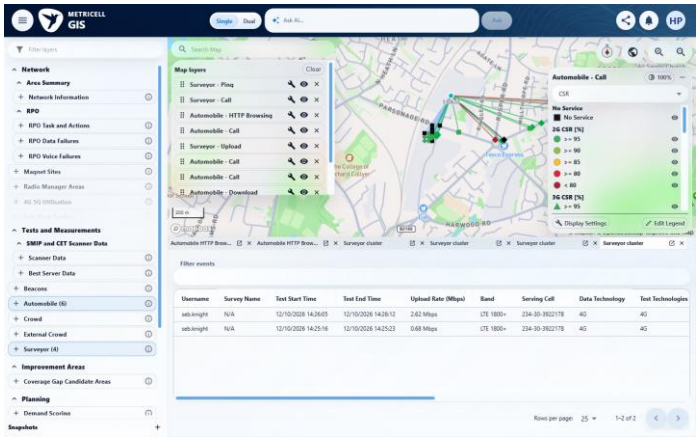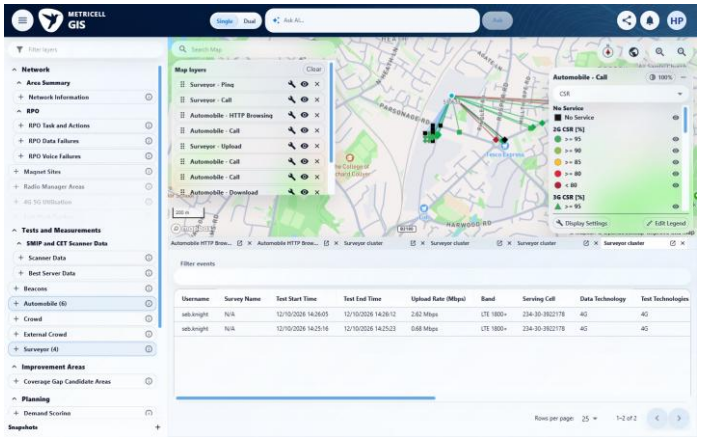E68 - Before select call (criterion-18-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 18 continued: When a selected result has related service information, its Service Details tab can be opened. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E61 - After add call (criterion-18-after-add-call.png)**  **E62 - Final (criterion-18-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
19.0.0	Call technology legends and filters include 2G, 3G, 4G, and 5G SA and exclude 5G NSA.	Call technology legends and filters include 2G, 3G, 4G, and 5G SA and exclude 5G NSA.	criterion-19-after-select-call.png establishes Call as the configured test type; criterion-19-final.png visibly includes checked 2G, 3G, 4G, 5G SA and 5G NSA filters. The 5G NSA option directly contradicts the exclusion requirement. Evidence: E59, E69, E70, E71	Failed



Criterion 19 evidence: Call technology legends and filters include 2G, 3G, 4G, and 5G SA and exclude 5G NSA.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

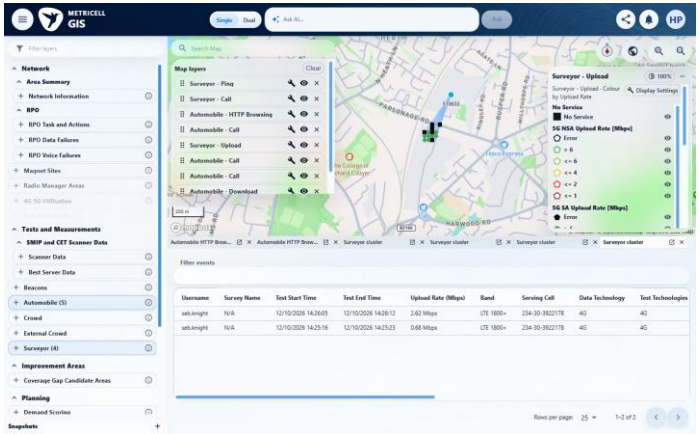E59 - Before open automobile (criterion-19-before-open-automobile.png)



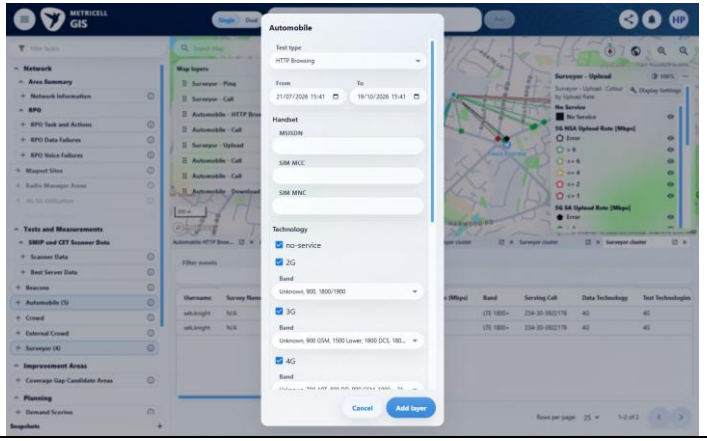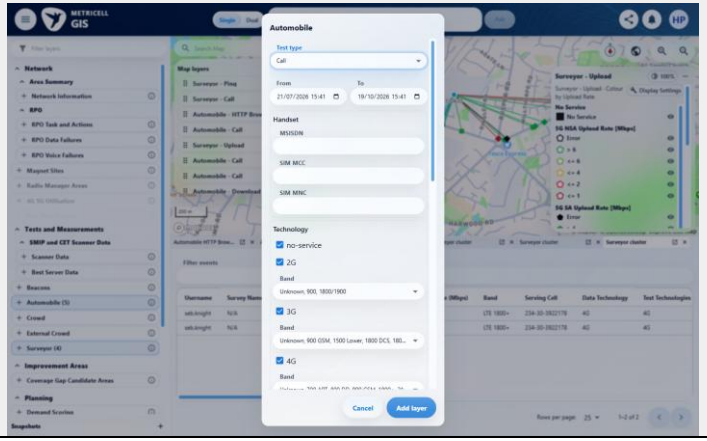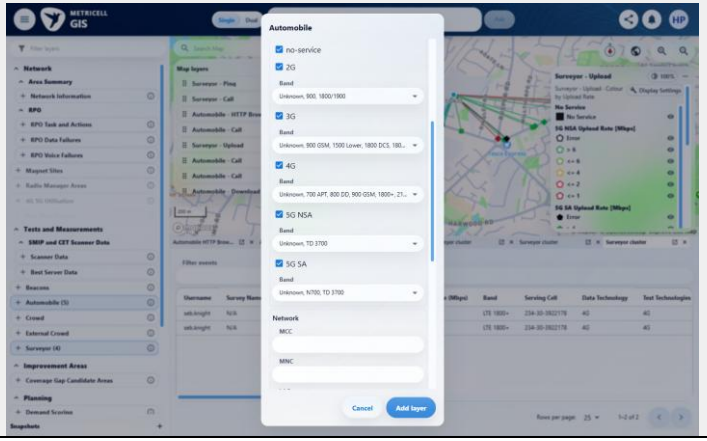E69 - Before select call (criterion-19-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 19 continued: Call technology legends and filters include 2G, 3G, 4G, and 5G SA and exclude 5G NSA. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E70 - After select call (criterion-19-after-select-call.png)**  **E71 - Final (criterion-19-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
20.0.0	Requesting details for a selected result with no duration displays a clear no-data message.	Requesting details for a selected result with no duration displays a clear no-data message.	criterion-20-final.png shows Surveyor results without a selected no-duration Call result. Reported Call points HTTP 500 blocks requesting the required result's details and checking its no-data message. Evidence: E72, E73, E74	Blocked


Criterion 20 evidence: Requesting details for a selected result with no duration displays a clear no-data message.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

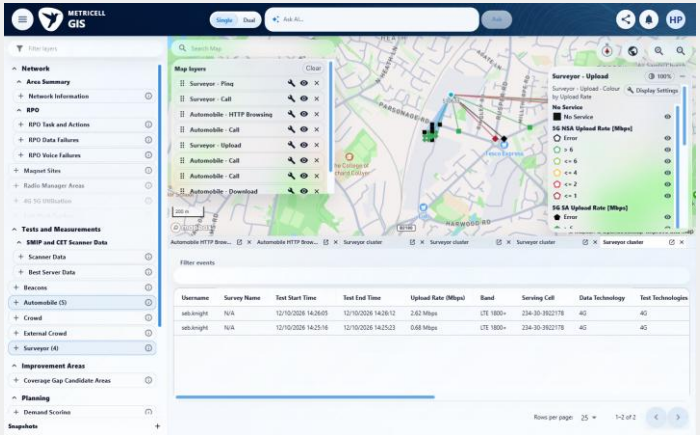E72 - Before open automobile (criterion-20-before-open-automobile.png)



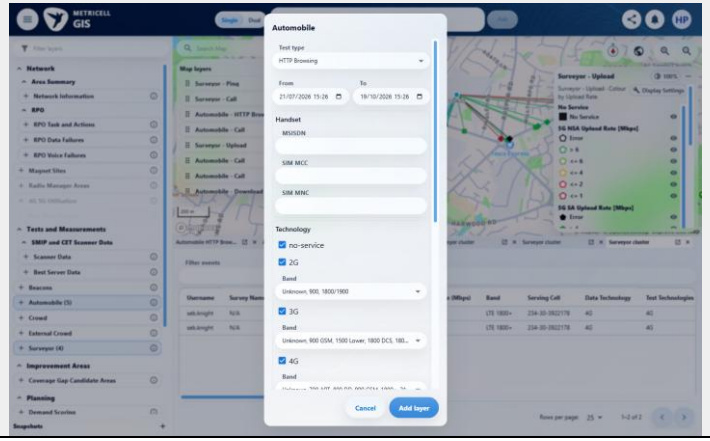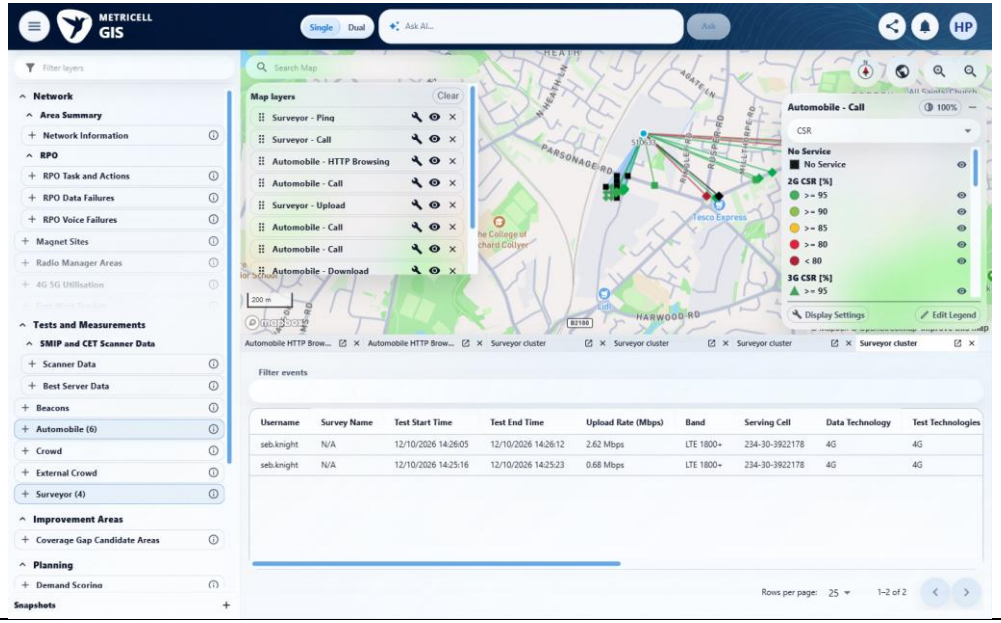E73 - Before select call (criterion-20-before-select-call.png)




ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 20 continued: Requesting details for a selected result with no duration displays a clear no-data message. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E74 - Final (criterion-20-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
21.0.0	When point or service details cannot be returned, the selected item does not show stale detail data.	When point or service details cannot be returned, the selected item does not show stale detail data.	criterion-21-final.png shows Surveyor results without a demonstrated Call/Service detail baseline followed by an unavailable-detail selection. Reported Call points HTTP 500 blocks establishing the Call results needed to assess stale-data prevention. Evidence: E59, E75, E74, E76	Blocked




Criterion 21 evidence: When point or service details cannot be returned, the selected item does not show stale detail data.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

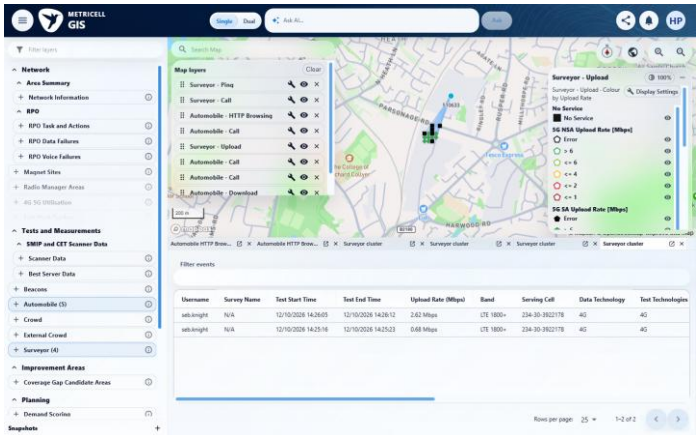E59 - Before open automobile (criterion-21-before-open-automobile.png)



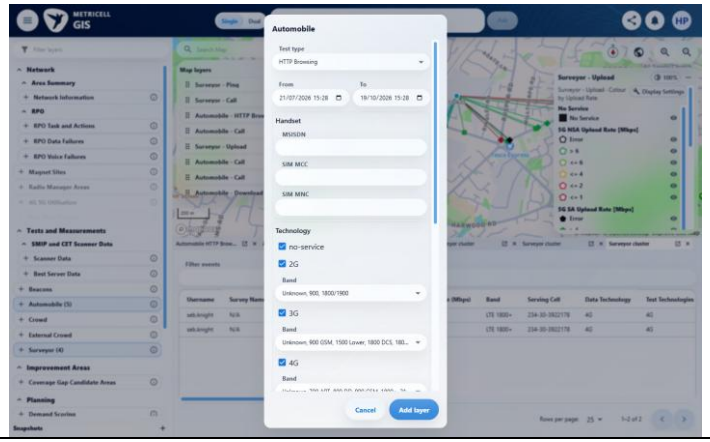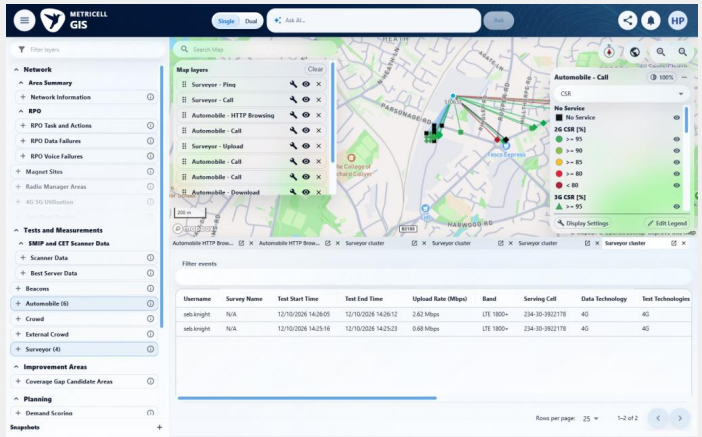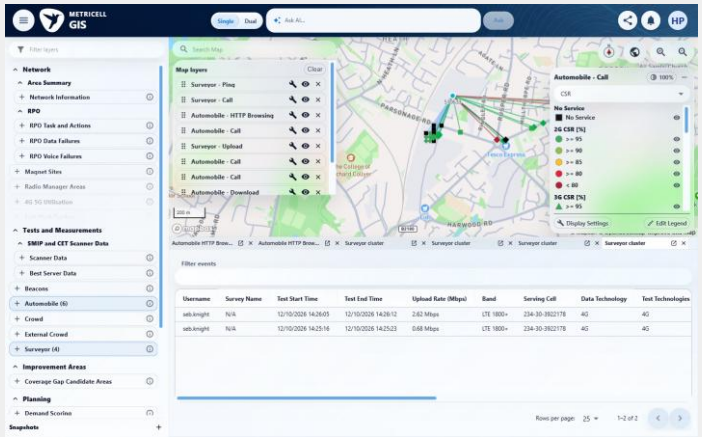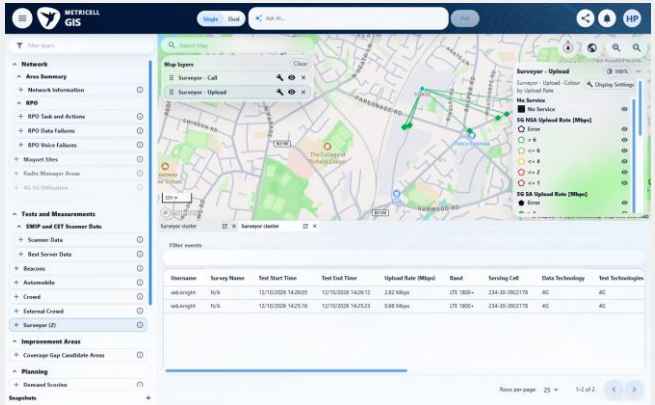E75 - Before select call (criterion-21-before-select-call.png)



ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 21 continued: When point or service details cannot be returned, the selected item does not show stale detail data. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E74 - After add call (criterion-21-after-add-call.png)**  **E76 - Final (criterion-21-final.png)** 				
Supporting setup captures - full attempt evidence remains in the local evidence folder				
E77 - After open gis (criterion-1-after-open-gis.png) 				

metricell
Better Connected

About Metricell

Metricell is on a mission to deliver connectivity. We work with our customers to design, deliver and manage wireless communication networks – with a shared ambition of achieving flawless network experience. We've been responsible for many first-to-market products, and our technology is characterised by the relentless pursuit of automation and digitalisation.

Our geospatial intelligence tools traverse a wide variety of business processes – from Test & Measurement to Customer Experience Management – and we're pioneers in Crowdsourcing and Digital Self Care. Our technology is today in use by a range of customers; thousands of their personnel; and millions of subscribers worldwide.

Find out more at www.metricell.com

