Print sheet

Generated 2026-11-11 00:10. Bed 256 x 256 x 260 mm (Bambu X2D). Masses and times are rough estimates: walls and infill per material from the settings below, volume at a typical print rate plus 2.14286 s per 0.2 mm layer, the layer time counted once per plate.

Parts

part	material	qty	print bbox mm	vol cm3	mass g	time h	overhang mm2	supports
opt_reel_bracket	PLA	1	193.5 x 40.0 x 50.0	64.3	31.3	0.62	21	no
opt_drum_dummy	PLA	1	96.0 x 96.0 x 128.0	44.7	55.5	1.21	0	no
opt_drum_saddle	PLA	1	44.0 x 82.0 x 32.4	37.5	16.7	0.35	0	no
opt_reel_spool	PLA	1	62.0 x 62.0 x 38.0	15.1	18.8	0.39	2814	yes, tree supports from the plate (2814 mm2 over 45 deg)

opt_reel_bracket: Rotated: the part's -x axis points up. OPTIONAL reel bracket (glue the spool to its face)
opt_drum_dummy: As modelled, bottom face on the bed. OPTIONAL selector drum look-alike (hollow), gear end down; sits on the drum saddle
opt_drum_saddle: As modelled, bottom face on the bed. OPTIONAL saddle for the drum look-alike
opt_reel_spool: Rotated: the part's +y axis points up. OPTIONAL storage reel look-alike (hollow spool)

Plates

plate	material	objects	mass g	time h
plate_1_PLA.3mf	PLA	4	122	2.2

Totals on the plates

material	objects	plates	mass g	filament m	time h
PLA	4	1	122	41.0	2.2


Recommended settings

PLA

- 0.4 mm nozzle, 0.2 mm layers
- 4 walls, 5 top and 5 bottom layers
- 40 % gyroid infill
- Nozzle 220 C, bed 55 to 60 C, textured PEI plate
- Door open or top vented

plate_1_PLA.3mf

PLA, 4 objects, about 122 g and 2.2 h.

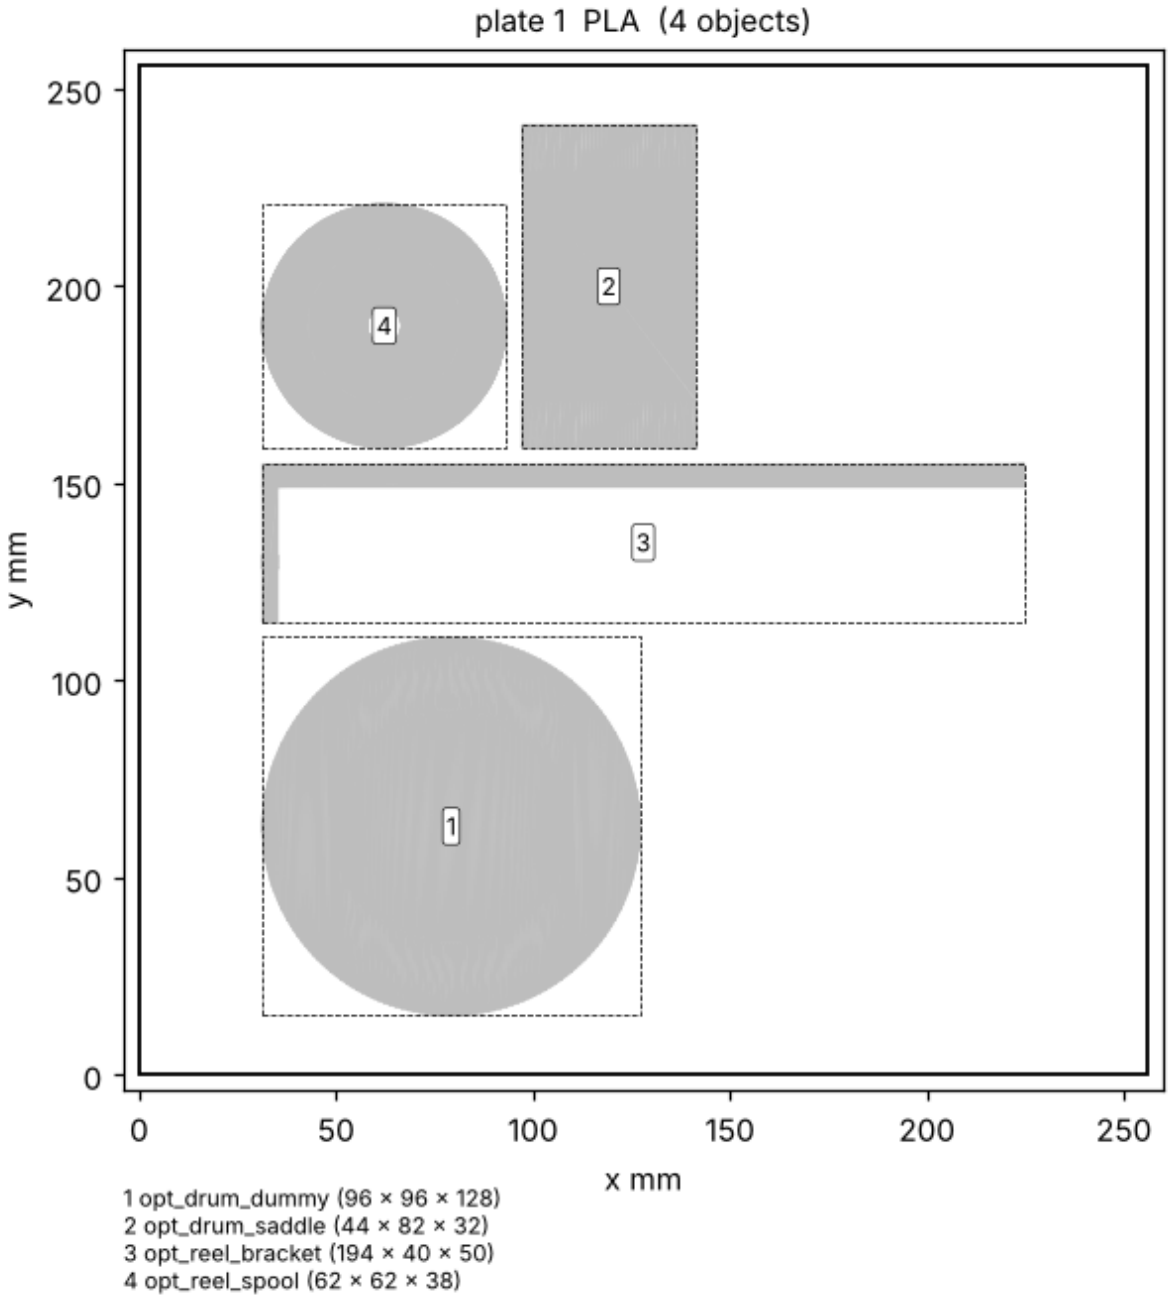

1 opt_drum_dummy (96 × 96 × 128)
2 opt_drum_saddle (44 × 82 × 32)
3 opt_reel_bracket (194 × 40 × 50)
4 opt_reel_spool (62 × 62 × 38)