Experiment 6

Student Name: Harsh Kumar   **UID: 22BCS15754**

Branch: BE-CSE   **Section/Group: FL_IOT-603 'B'**

Semester: 5th   **Date of Performance: 13/09/24**

Subject Name: Computer Networks   **Subject Code: 22CSH-312**

1. **Aim:** Configure a network using any Routing Protocol such as Distance Vector routing or Link State Routing Protocol using Packet Tracer or NS2

2. **Objective:**

- Set up basic IP addressing for the network.

- Enable a routing protocol (RIP for Distance Vector or OSPF for Link State) on the routers.

3. **Requirements:**

   - Packet Tracer.

   - Router

   - Switch

   - Wire

4. **Procedure:**

- Connect devices to the switch, and router in packet tracer.

- Assign IP addresses to each device.

- Configure RIP Routing on Routers.

- Check device communication via the router 1and router 2 and router 3.

- Select a source and destination device.

- Drag and drop a packet from the source to the destination

- Switch to Simulation mode in Packet Tracer.

- Click "Capture/Play" to start the simulation.

5. Output:
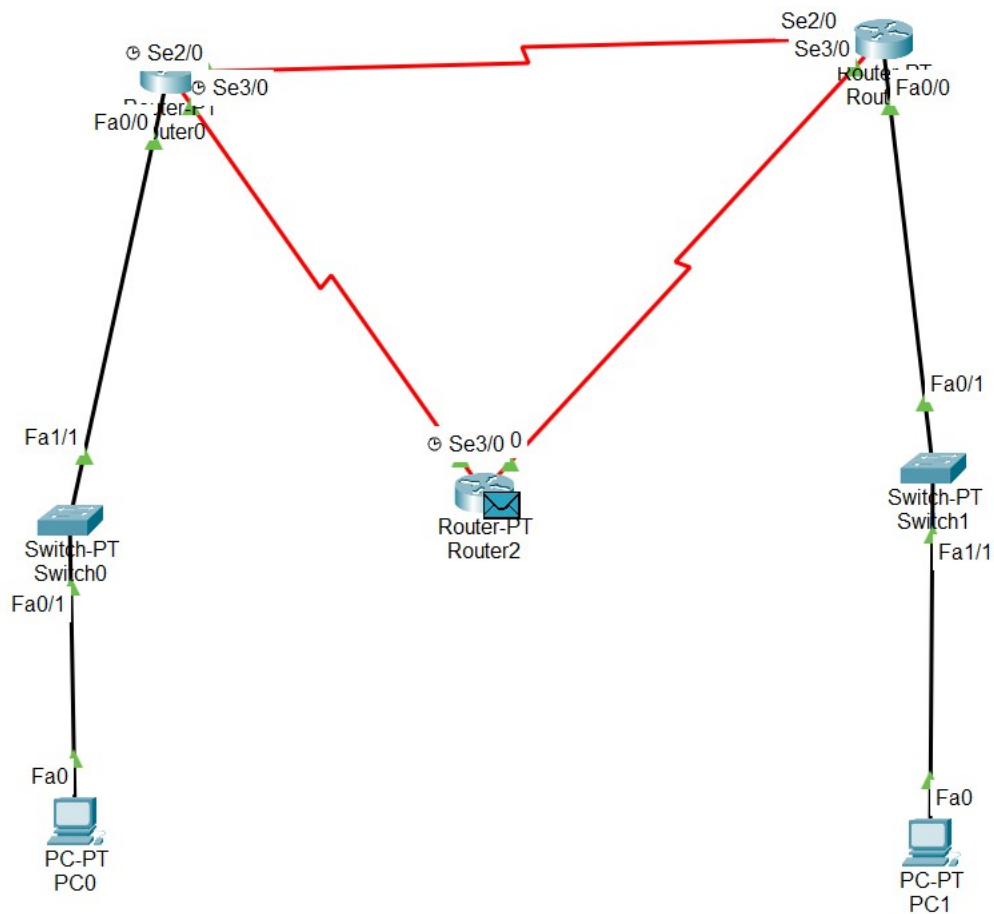
6. Learning Outcomes:

a. Learn the difference between Distance Vector (RIP) and Link State (OSPF) routing protocols.

b. Gain hands-on experience in configuring and managing routing protocols on Cisco routers using Packet Tracer.

c. Develop skills in designing, configuring, and troubleshooting networks with multiple subnets and routers.