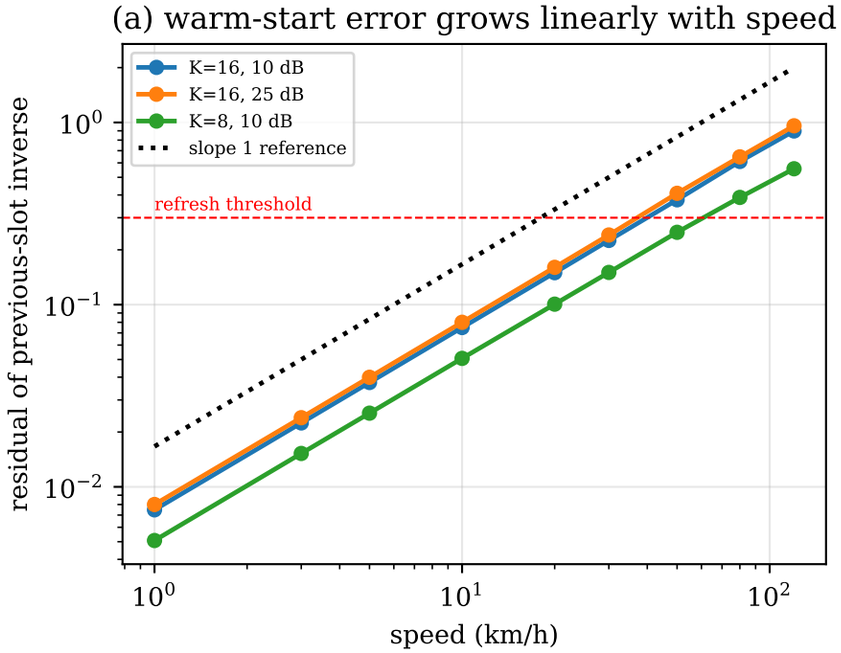
(a) warm-start error grows linearly with speed
K=16, 10 dB
K=16, 25 dB
K=8, 10 dB
slope 1 reference
refresh threshold
residual of previous-slot inverse
speed (km/h)

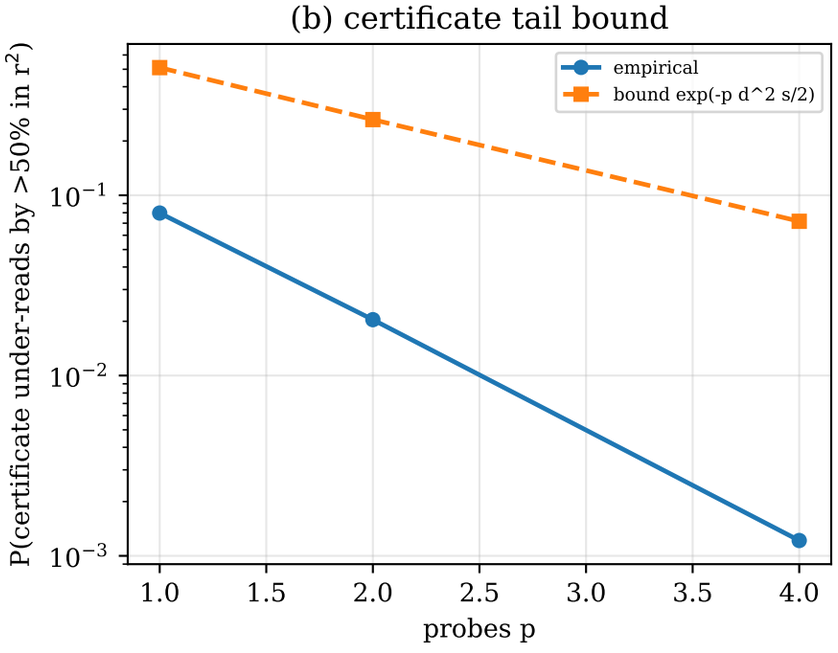
(b) certificate tail bound
empirical
bound exp(-p d^2 s/2)
P(certificate under-reads by >50% in r²)
probes p

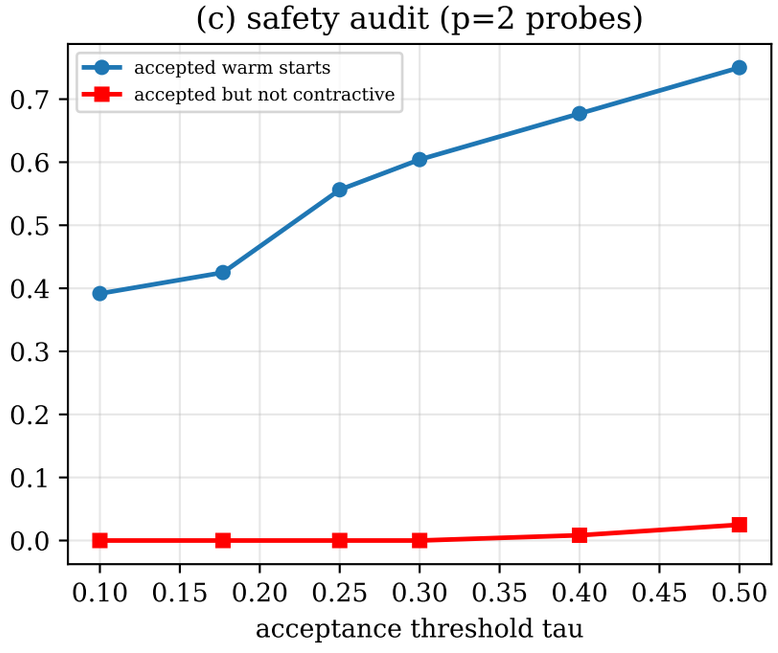
(c) safety audit (p=2 probes)
accepted warm starts
accepted but not contractive
acceptance threshold tau