


NMSE vs SNR at fixed operating points (M=64, N=1200, 12 realisations; BFP b=4, SVD/RAS r=12, CSEE K=120, b=10)

(a) NMSE vs transported Y (reference symbols)



(b) NMSE vs noiseless channel H

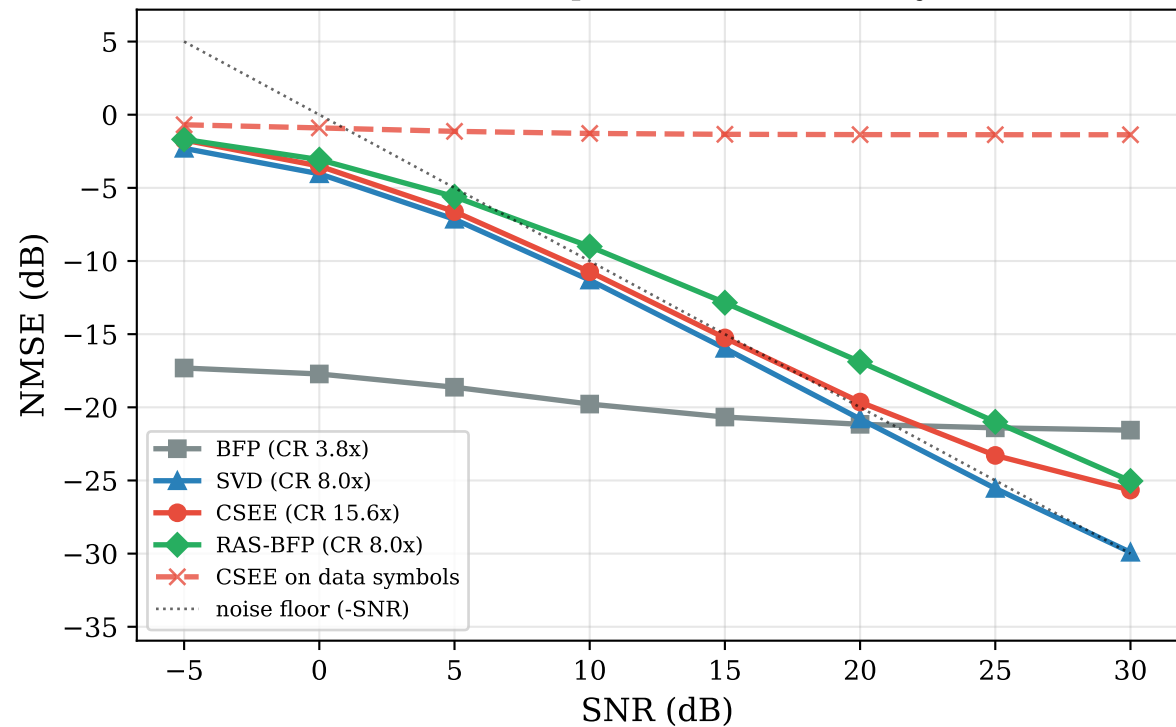