176L_dwb

process design review · 1316 steps · generated by CarbonEDA v0 on 2026-11-09 00:46 EST

1,199.6

kgCO2e per wafer start

815.7
EPW energy · 68%

87.0
MPW materials · 7%

296.8
GPW gases · 25%

wafer 300 mm · yield 1 · carbon intensity 0.43 kgCO2e/kWh · facility overhead 0.4 x tool energy
EPW 815.7 = tool 582.7 + facility overhead 233.1 kgCO2e (1,355 + 542 kWh)

flow technologies/flash/176L_dwb/176L_dwb_final.csv
layout technologies/flash/176L_dwb/176L_dwb_layout.GDS
structure images from the spx run of 2026-11-04 07:47:06

CarbonEDA parameters

config/carbon_config.yaml and materials.yaml as used for every number in this report

EPW energy

(tool + 0.4 x tool facility overhead) x 0.43 kgCO2e/kWh

process area	kWh / step	steps
Dry_etch	1.33	57
RIE	1.33	194
HAR_etch	1.33	99
WLP3_etch	5.33	2
WLP4_etch	5.33	2
WLP5_etch	2.67	2
WLP6_etch	1.33	2
Ion_implantation	1.33	26
Diffusion	1.33	42
Metallization	2	33
Wet_etch	0.28	17
Wafer_clean	0.28	212
Resist	0.28	100
CMP	0.28	40
Deposition	1.09	50
Deposition_stack	0.545	197
CVD	1.09	157
ArF-i	0.36	42
ArF	0.33	6
KrF	0.33	33
Hg	0.33	3

GPW process gases

kg x (1 - utilization) x (1 - abatement) x GWP, plus byproducts kg/kg x (1 - abatement) x GWP; defaults: utilization 1.0, abatement 0.9

area	gas	g / step	upstream*	utilization	abatement	byproducts (kg per kg gas)
CVD	NF3	2.54	12.5	0.8	0.95	CF4 0.046, C2F6 0.045, CHF3 0.025, CH2F2 0.00086,...
Deposition_stack	NF3	1.27	12.5	0.8	0.95	CF4 0.046, C2F6 0.045, CHF3 0.025, CH2F2 0.00086,...
HAR_etch	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
HAR_etch	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP3_etch	C4F8	0.641	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP3_etch	SF6	1.76	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP4_etch	C4F8	0.641	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP4_etch	SF6	1.76	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP5_etch	C4F8	0.321	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP5_etch	SF6	0.878	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP6_etch	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP6_etch	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
RIE	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
RIE	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05

* kgCO2e per kg of gas made, counted in MPW

GWP (kgCO2e per kg, 100-yr) and abatement of every gas emitted

gas	GWP	abatement
CF4	7390	0.89
C2F6	12200	0.95
C4F6	0	0.98
C4F8	10300	0.98
CHF3	14800	0.98

gas	GWP	abatement
CH2F2	675	0.98
CH3F	116	0.98
NF3	17200	0.95
SF6	22800	0.95

CarbonEDA parameters (continued)

MPW materials

blanket film over a 300 mm wafer: thickness x area x density x GWP; the wafer itself 26000 gCO2e (300 mm); yield 1

material	g/cm³	gCO2e/g
TiN	5.21	43.98
Resist	0.97	4.2
W	19.3	75.81
Ti	4.5	47.63
TaN	13.7	25.82
Cu	8.96	6.09
Co	8.9	44.5
TEOS	0.94	2.86
TiAl	3.6	29.18
Al	2.7	10.73

Step #20: Wafer

substrate · Wafer

26	26	2.2%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

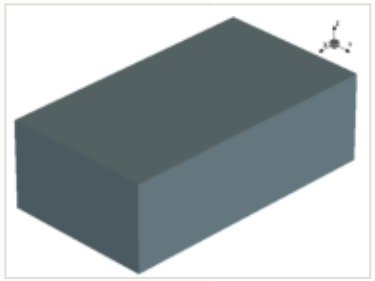

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	26 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**26 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

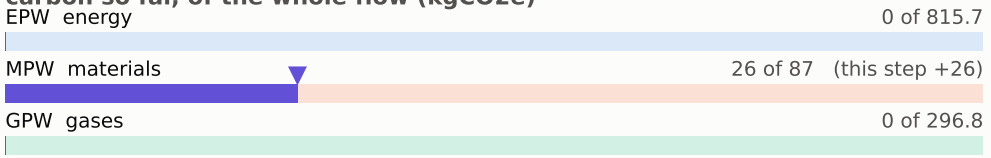

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

y cut at -0.150 µm

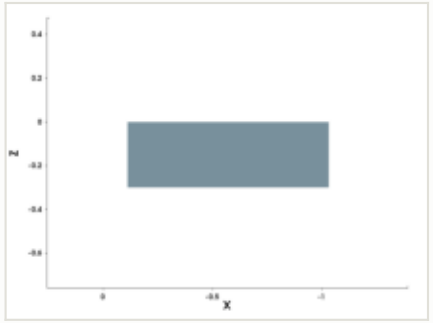

mask for this step

no mask for this step

steps by process area



materials deposited (g)

gases emitted (g)

Step #40: Wafer_clean

clean · Wafer_clean

0.169	26.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

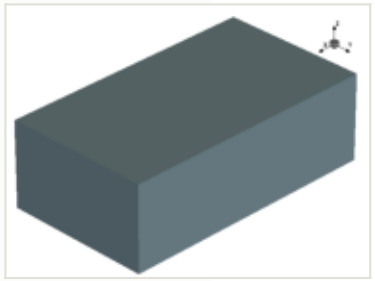

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

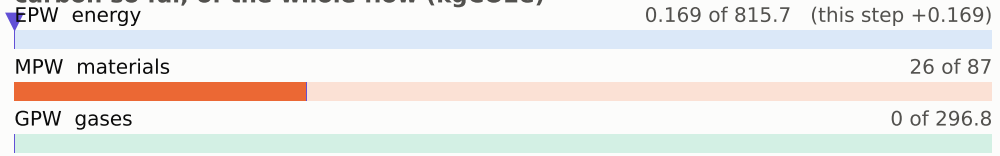

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

y cut at -0.150 µm

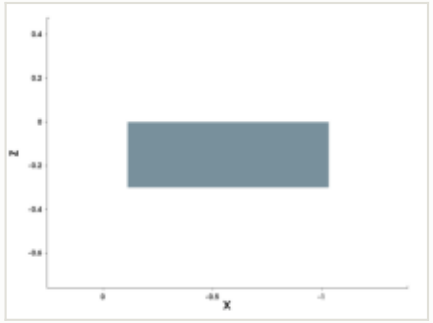

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

Step #50: Diffusion

depo_isotropic · Diffusion

0.801	27	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

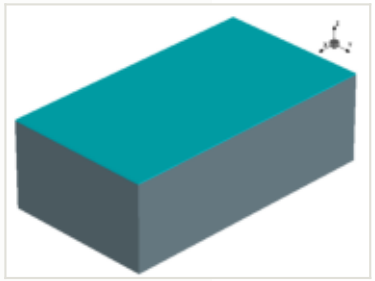

this step

process area	Diffusion
material	—
thickness	0.0035 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

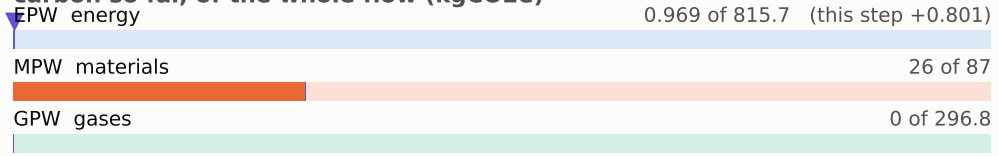

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

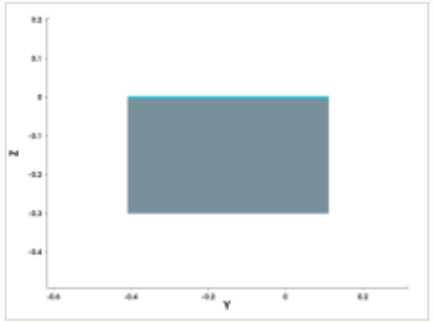

y cut at -0.150 µm

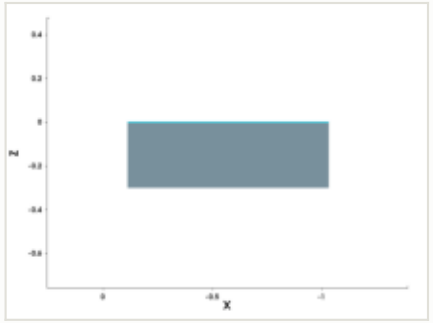

mask for this step

no mask for this step

steps by process area

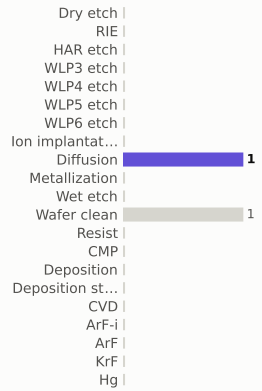

materials deposited (g)

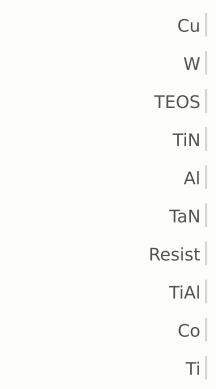

gases emitted (g)

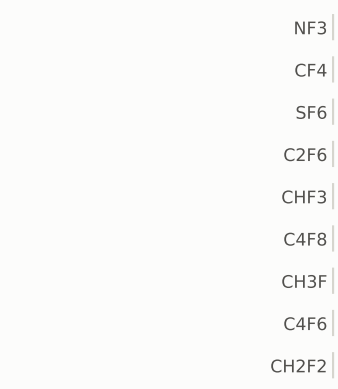

Step #60: CVD

depo_isotropic · CVD

1.31	28.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

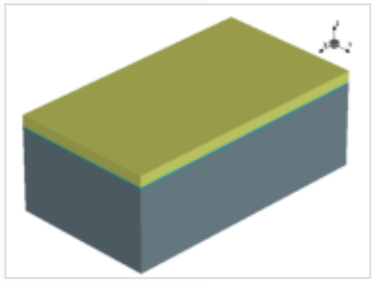

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

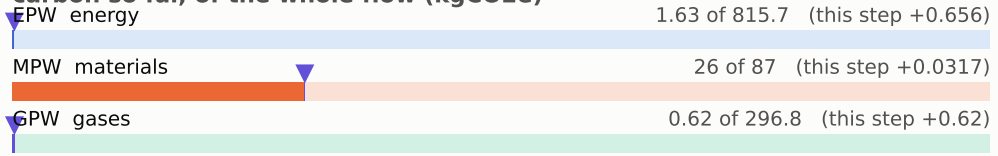

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

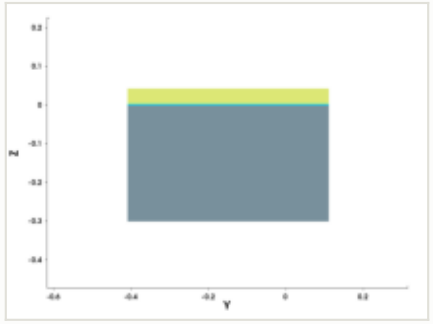

y cut at -0.150 µm

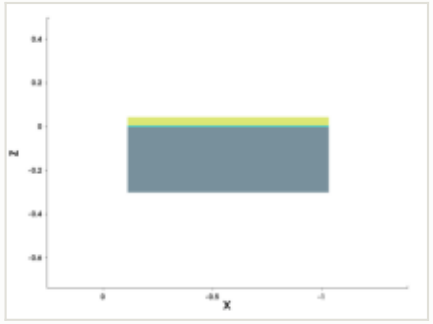

mask for this step

no mask for this step

steps by process area

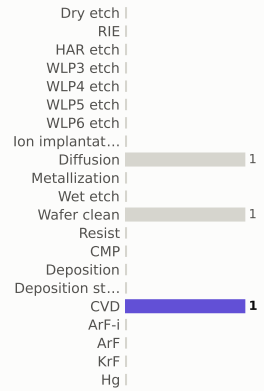

materials deposited (g)

gases emitted (g)

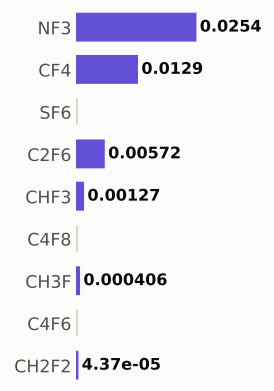

Step #70: CVD

depo_isotropic · CVD

1.31	29.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

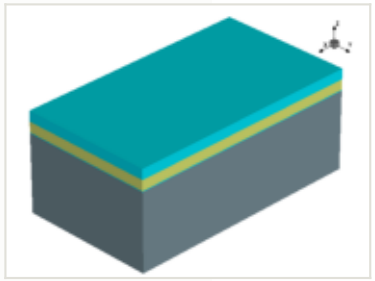

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

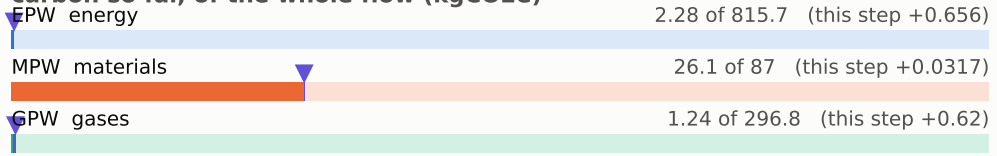

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

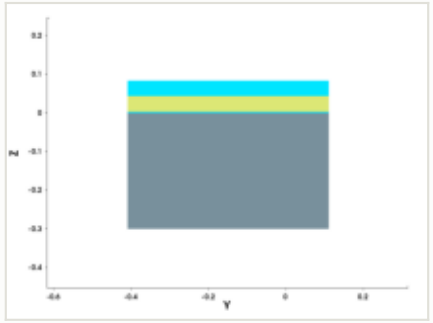

y cut at -0.150 µm

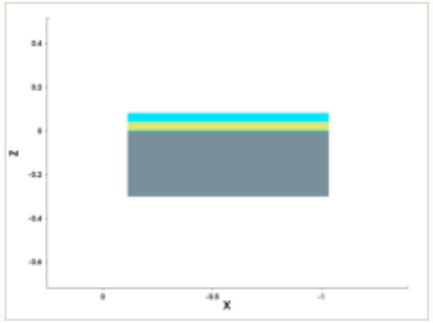

mask for this step

no mask for this step

steps by process area

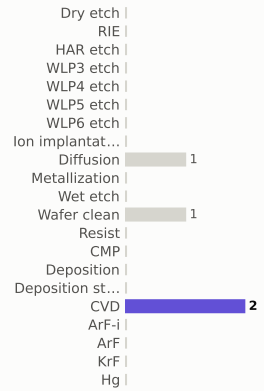

materials deposited (g)

gases emitted (g)

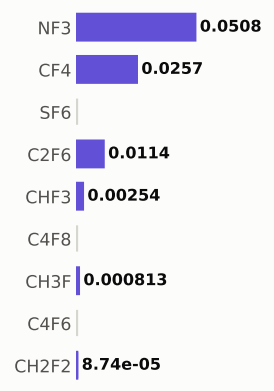

Step #80: CVD

depo_isotropic · CVD

1.31	30.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

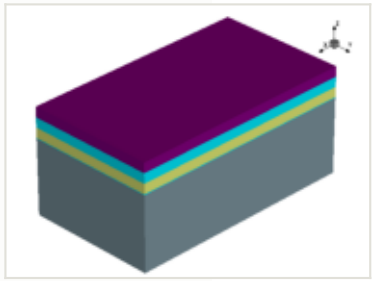

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

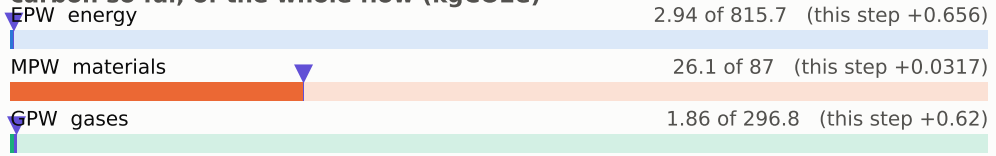

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

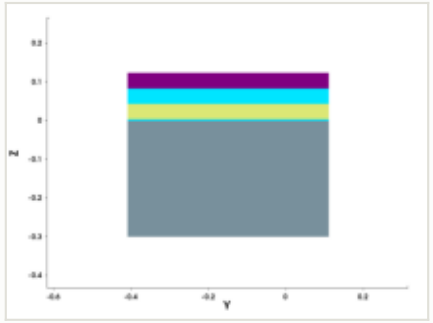

y cut at -0.150 µm

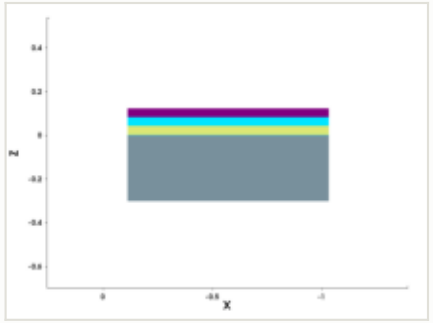

mask for this step

no mask for this step

steps by process area

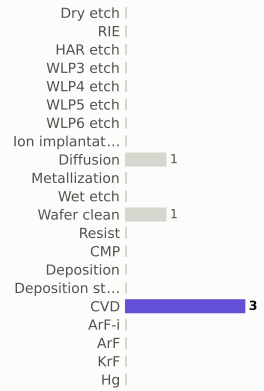

materials deposited (g)

gases emitted (g)

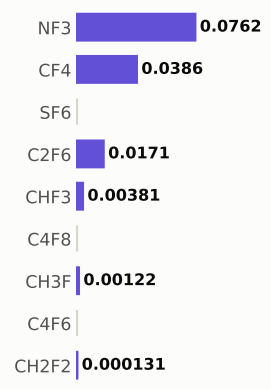

Step #90: Wet_etch

etch_isotropic · Wet_etch

0.169	31.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

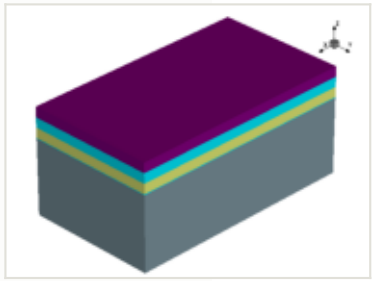

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

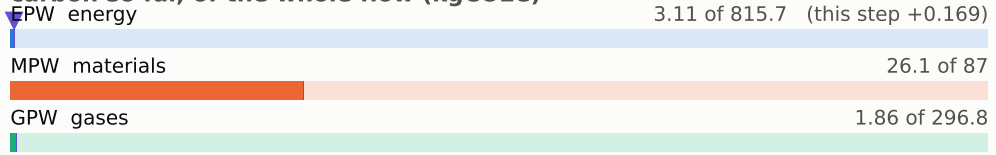

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

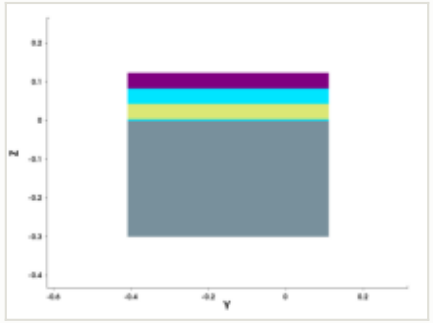

y cut at -0.150 µm

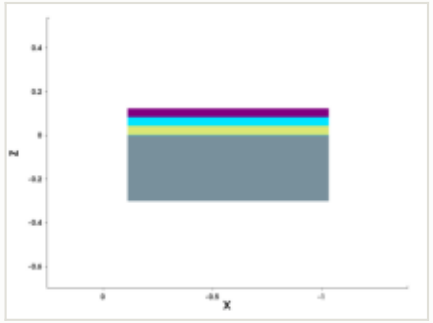

mask for this step

no mask for this step

steps by process area

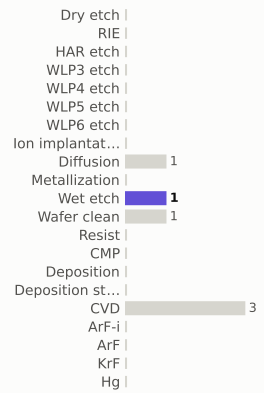

materials deposited (g)

gases emitted (g)



Step #100: Wet_etch

etch_isotropic · Wet_etch

0.169	31.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

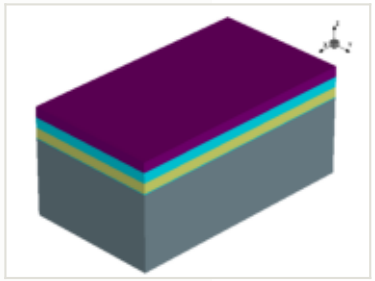

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

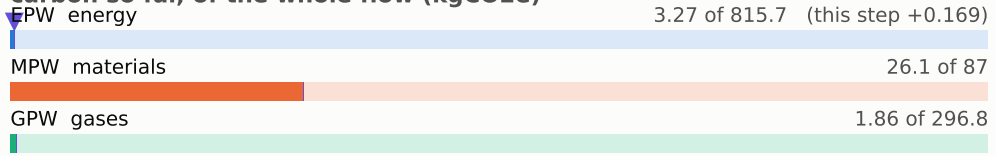

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

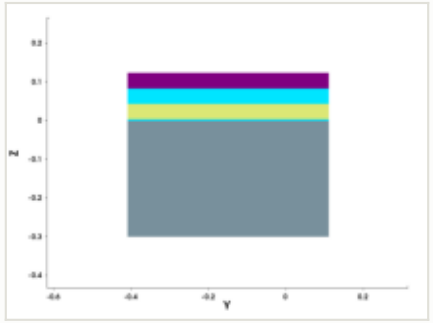

y cut at -0.150 µm

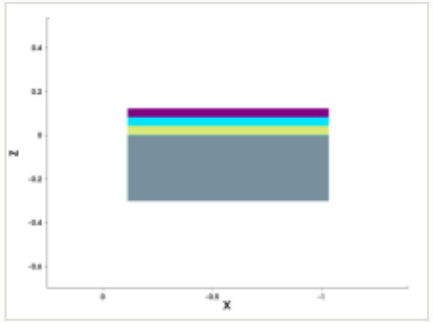

mask for this step

no mask for this step

steps by process area

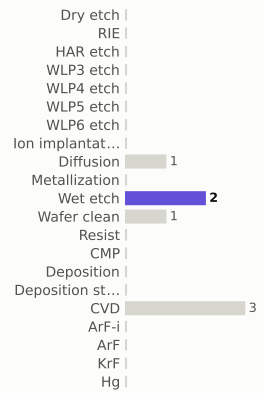

materials deposited (g)

gases emitted (g)



Step #110: Resist

depo_fill · Resist

0.169	31.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

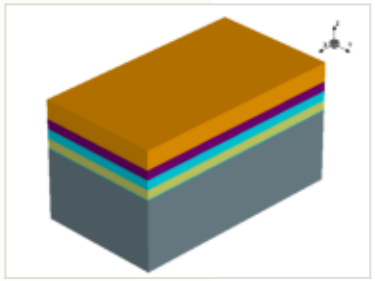

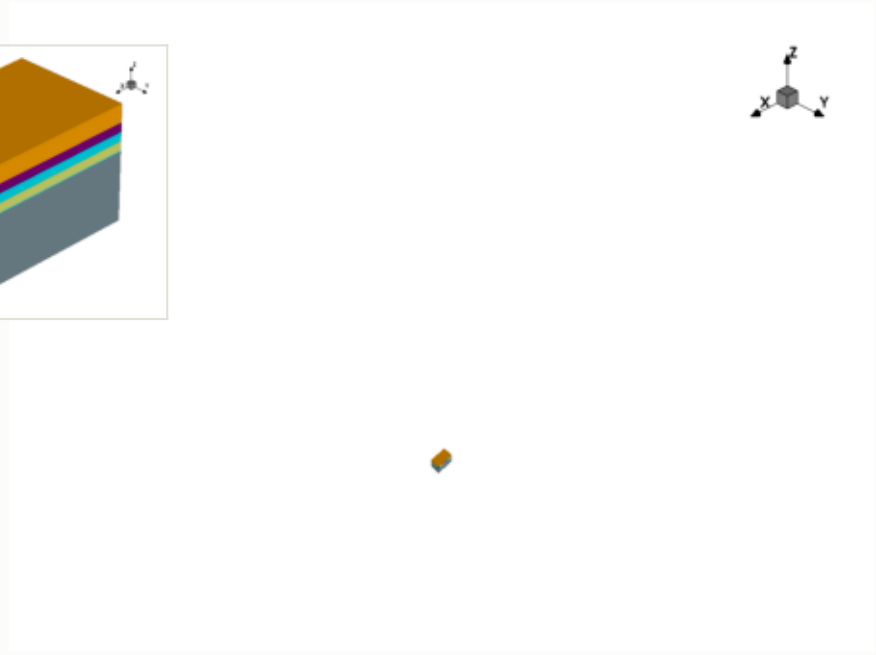

this step

process area	Resist
material	—
thickness	0.08 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

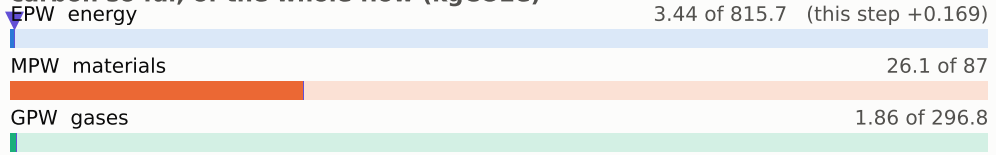

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

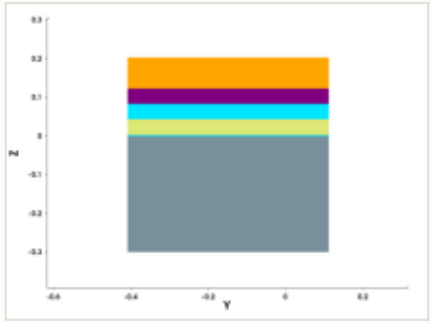

y cut at -0.150 µm

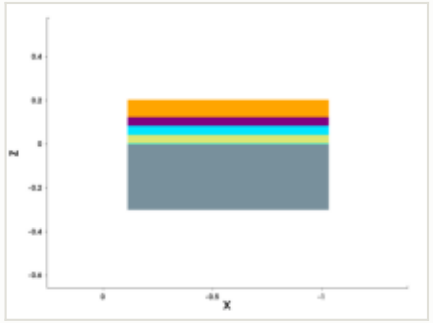

mask for this step

no mask for this step

steps by process area

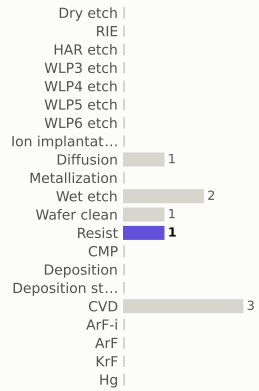

materials deposited (g)

gases emitted (g)

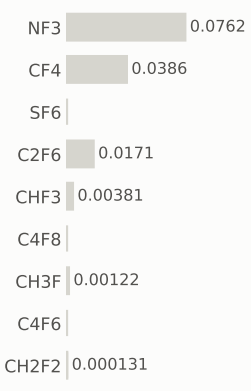

Step #120: CVD

depo_isotropic · CVD

1.31	32.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

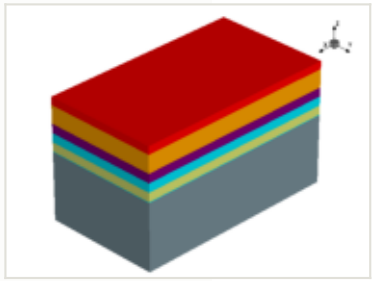

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

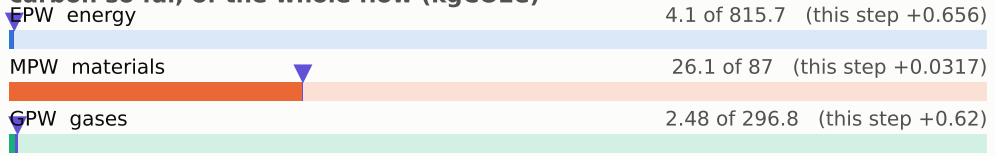

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

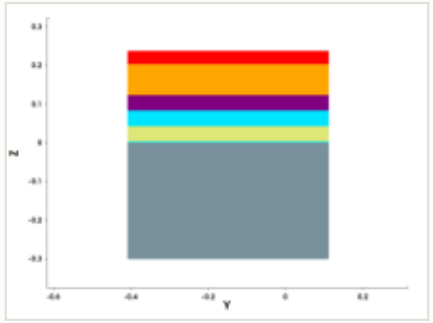

y cut at -0.150 µm

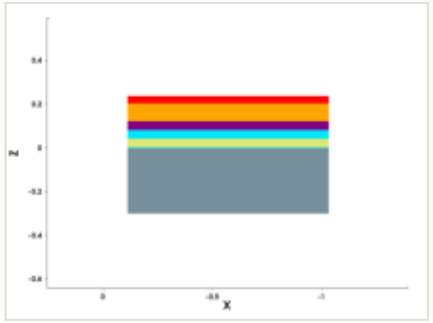

mask for this step

no mask for this step

steps by process area

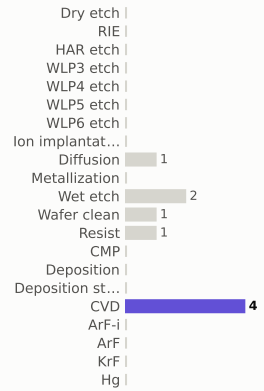

materials deposited (g)

gases emitted (g)

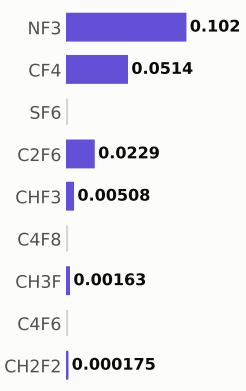

Step #130: Wafer_clean

clean · Wafer_clean

0.169	32.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

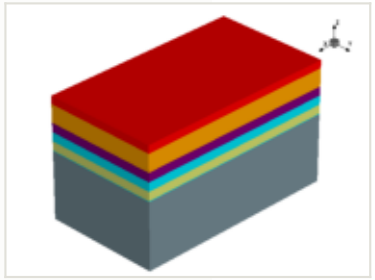

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

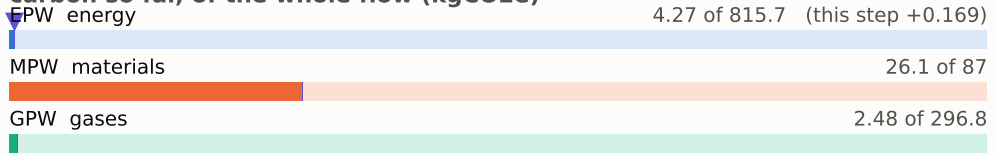

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

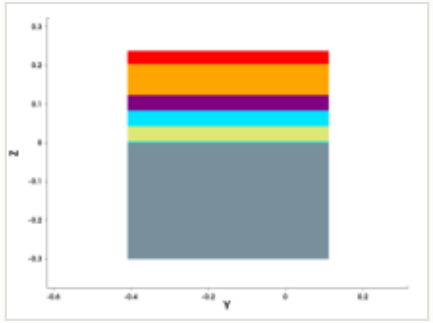

y cut at -0.150 µm

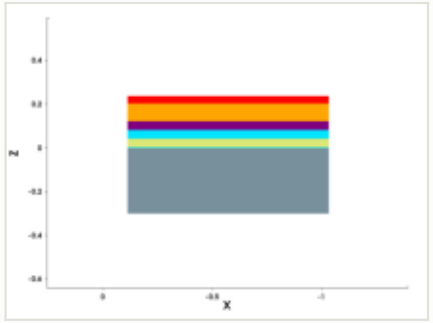

mask for this step

no mask for this step

steps by process area

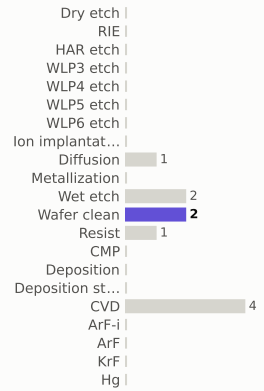

materials deposited (g)

gases emitted (g)

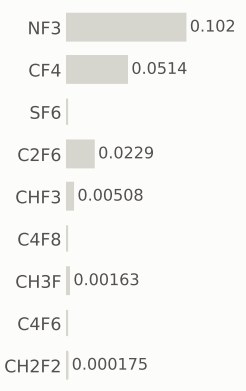

Step #140: Resist

resist · Resist

0.169	33	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

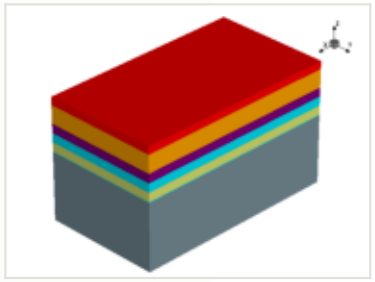

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

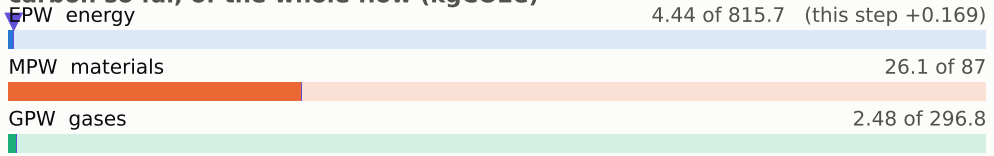

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

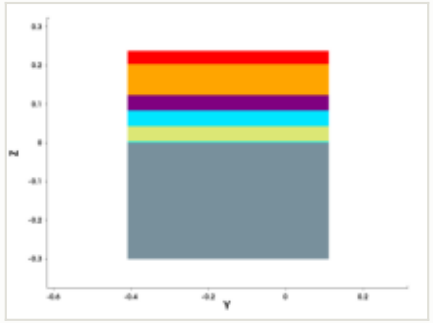

y cut at -0.150 µm

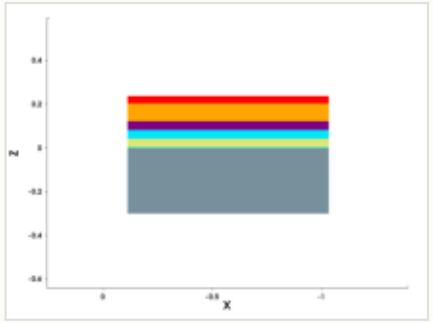

mask for this step

no mask for this step

steps by process area

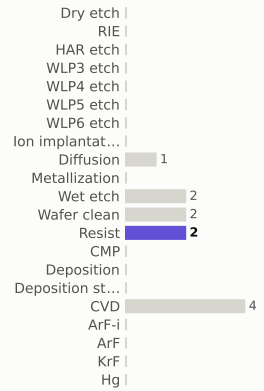

materials deposited (g)



gases emitted (g)

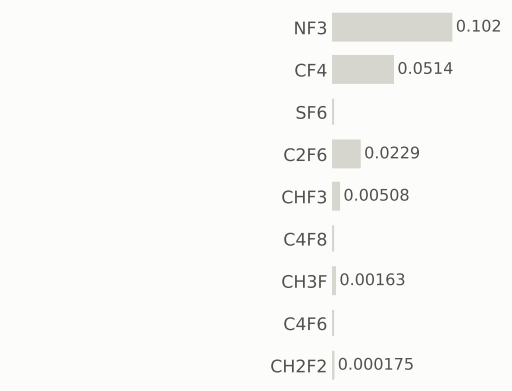

Step #150: ArF-i

litho_patterning · ArF-i

0.217	33.3	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

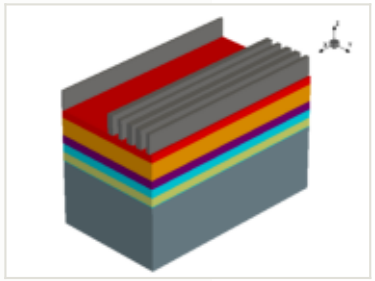

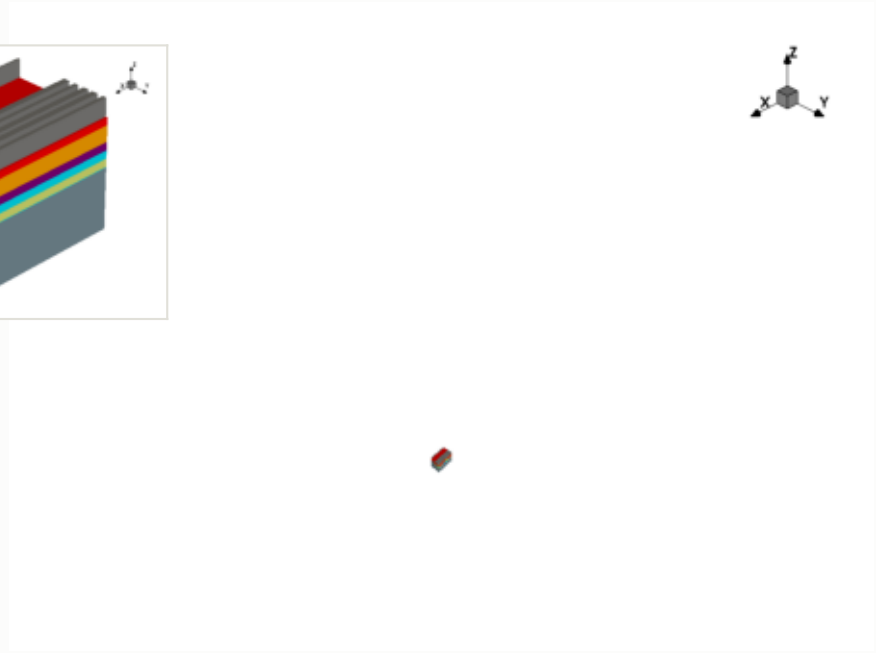

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

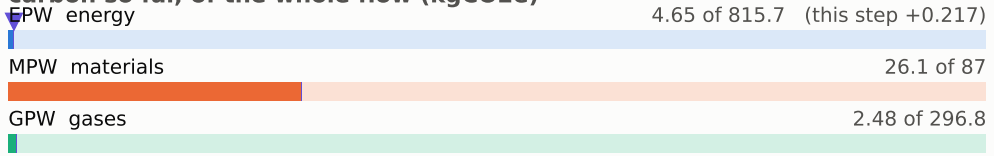

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

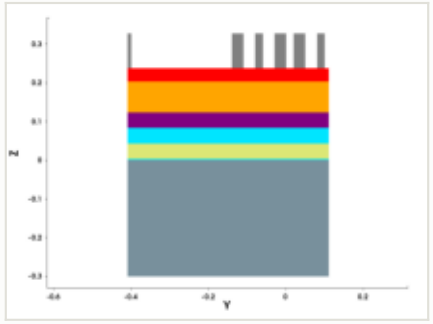

y cut at -0.150 µm

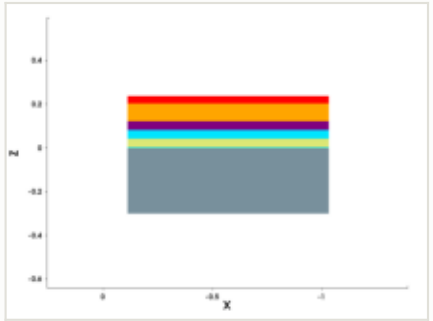

mask: layer 2401:0, positive (GDSII)

steps by process area

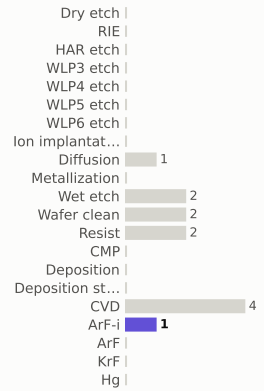

materials deposited (g)

gases emitted (g)

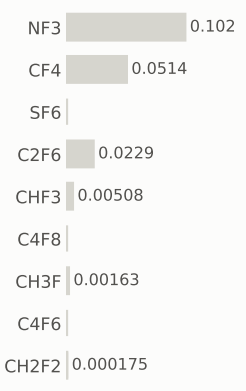

Step #160: Spx_only

etch_isotropic · Spx_only

0	33.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

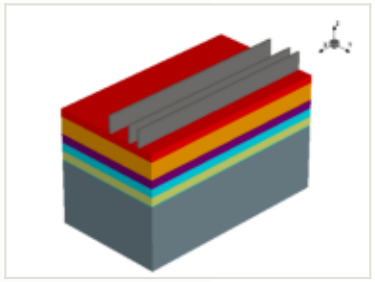

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 4.65 of 815.7

MPW materials 26.1 of 87

GPW gases 2.48 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

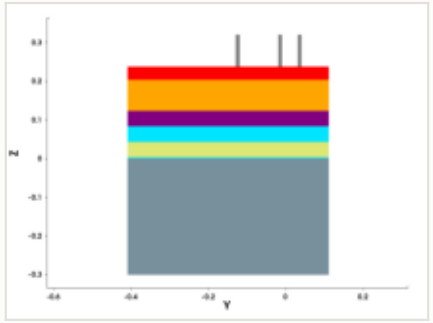

y cut at -0.150 µm

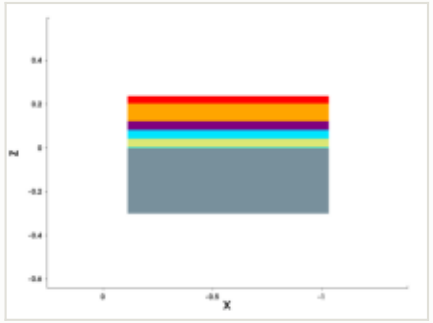

mask for this step

no mask for this step

steps by process area

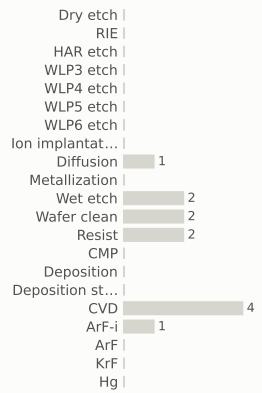

materials deposited (g)

gases emitted (g)

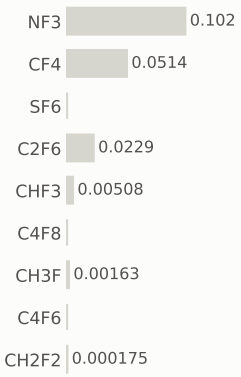

Step #170: Spx_only

etch_anisotropic · Spx_only

0	33.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

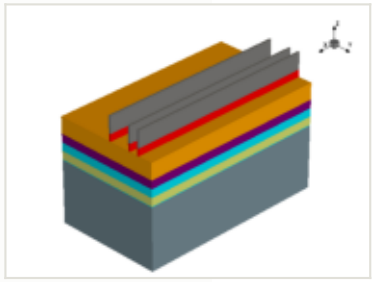

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

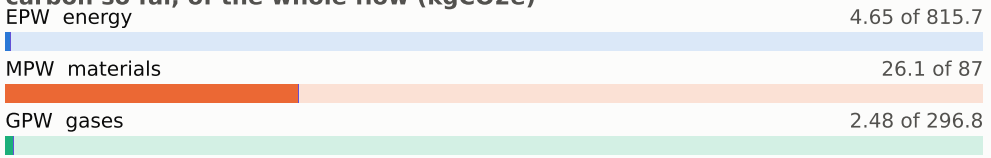

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

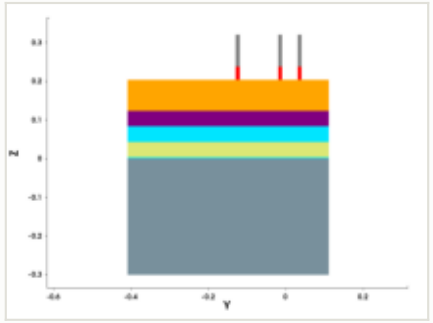

y cut at -0.150 µm

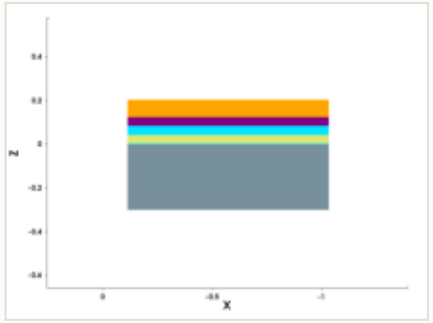

mask for this step

no mask for this step

steps by process area

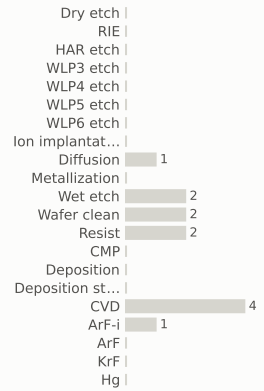

materials deposited (g)

gases emitted (g)

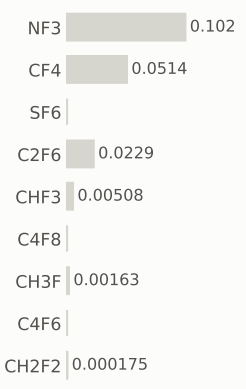

Step #180: RIE

etch_anisotropic · RIE

1.04	34.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

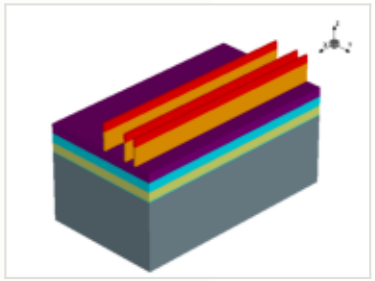

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 5.45 of 815.7 (this step +0.801)

MPW materials — 26.2 of 87 (this step +0.0571)

GPW gases — 2.67 of 296.8 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

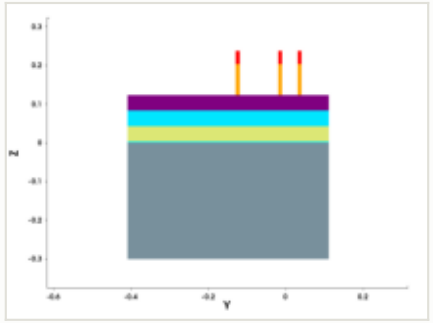

y cut at -0.150 µm

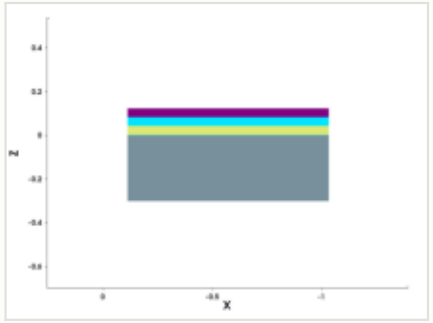

mask for this step

no mask for this step

steps by process area

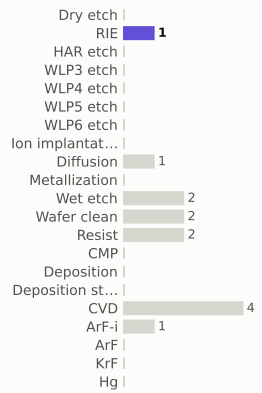

materials deposited (g)

gases emitted (g)

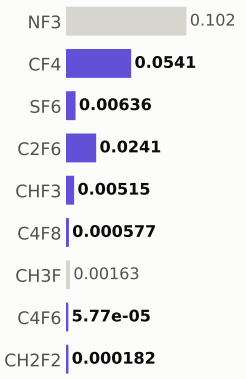

Step #190: Wafer_clean

clean · Wafer_clean

0.169	34.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

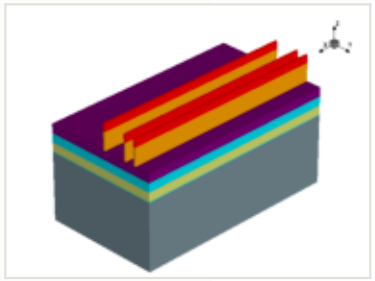

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

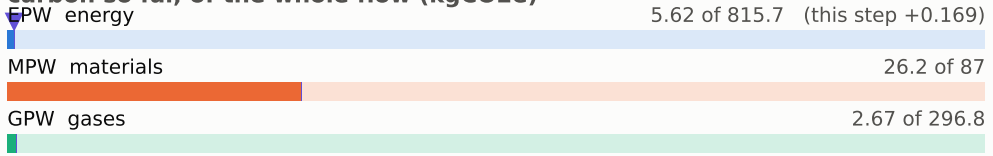

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

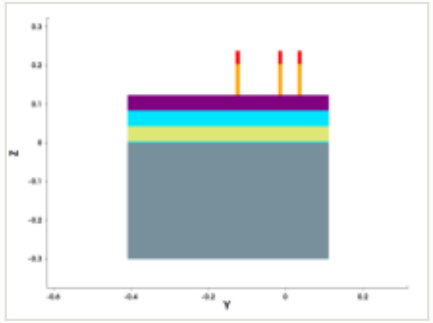

y cut at -0.150 µm

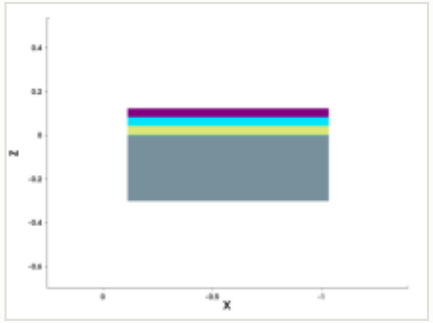

mask for this step

no mask for this step

steps by process area

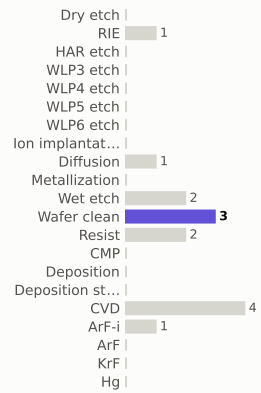

materials deposited (g)

gases emitted (g)

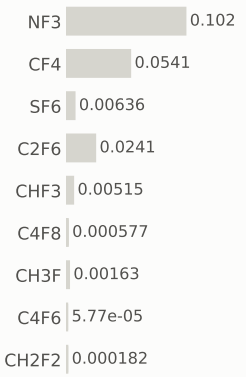

Step #200: Deposition

depo_isotropic · Deposition

0.656	35.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

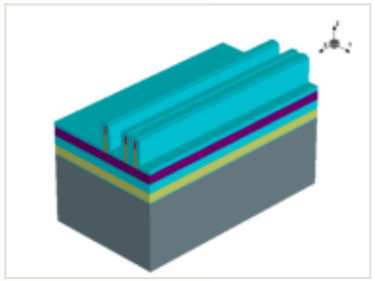

this step

process area	Deposition
material	—
thickness	0.019 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

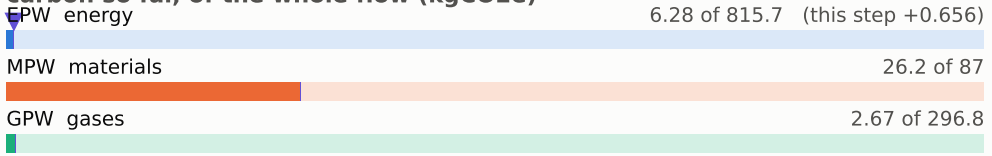

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

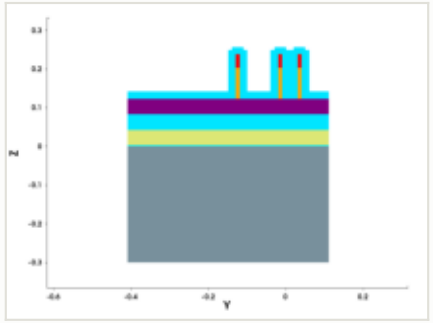

y cut at -0.150 µm

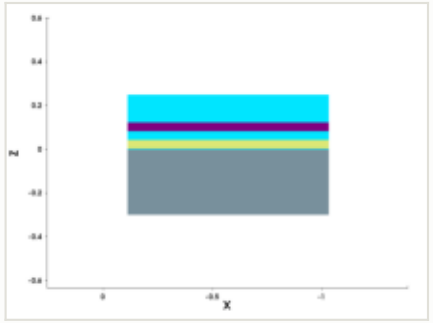

mask for this step

no mask for this step

steps by process area

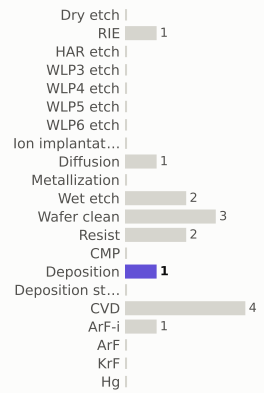

materials deposited (g)

gases emitted (g)

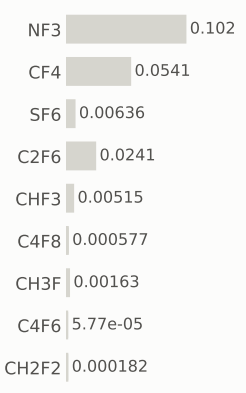

Step #210: RIE

etch_ellipsoidal · RIE

1.04	36.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

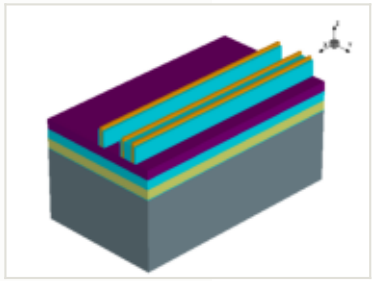

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 7.08 of 815.7 (this step +0.801)

MPW materials — 26.2 of 87 (this step +0.0571)

GPW gases — 2.86 of 296.8 (this step +0.187)

x cut at -0.570 µm

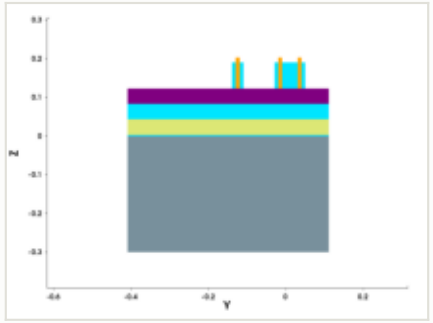

y cut at -0.150 µm

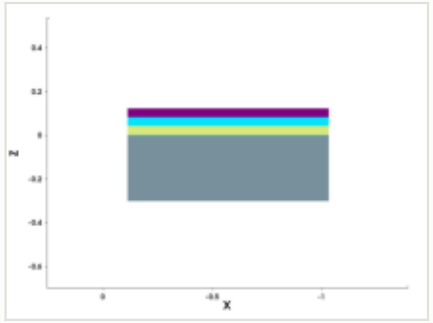

mask for this step

no mask for this step

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

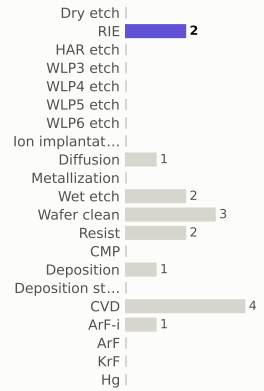

materials deposited (g)

gases emitted (g)

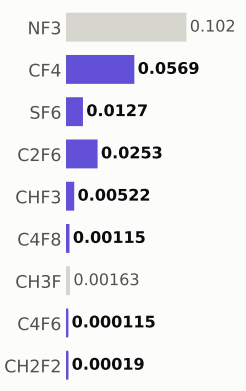

Step #220: Spx_only

etch_isotropic · Spx_only

0	36.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

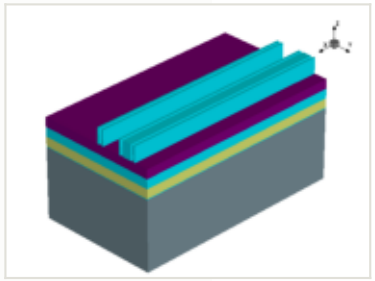

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

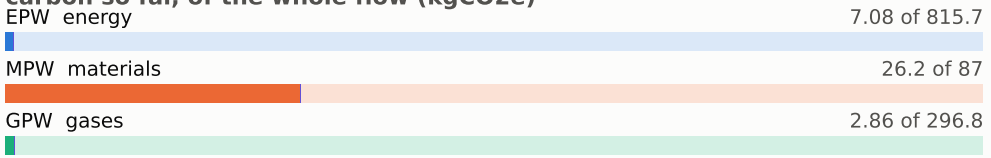

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

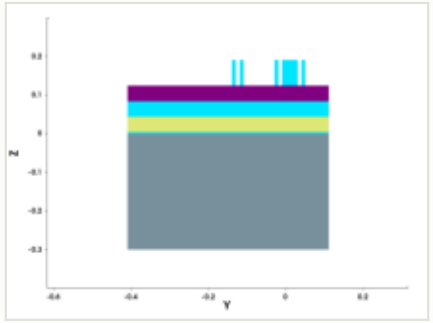

y cut at -0.150 µm

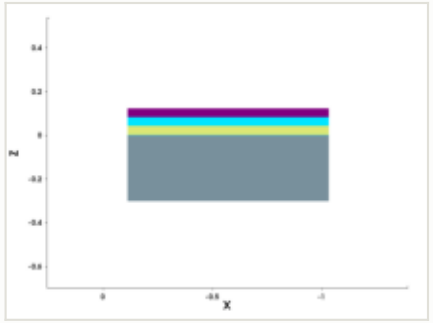

mask for this step

no mask for this step

steps by process area

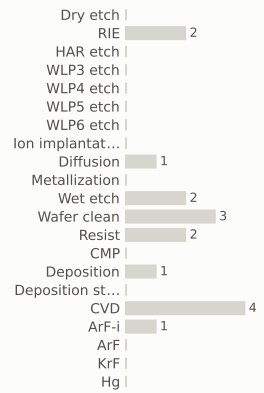

materials deposited (g)

gases emitted (g)

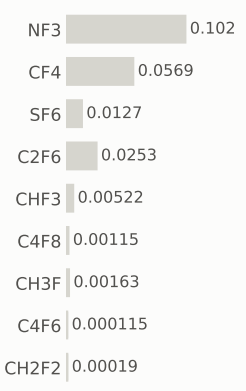

Step #230: Spx_only

etch_anisotropic · Spx_only

0	36.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

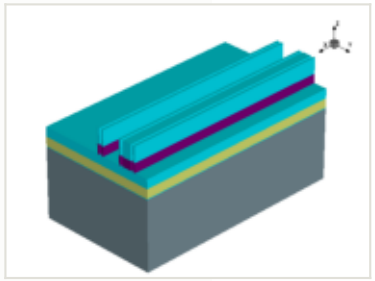

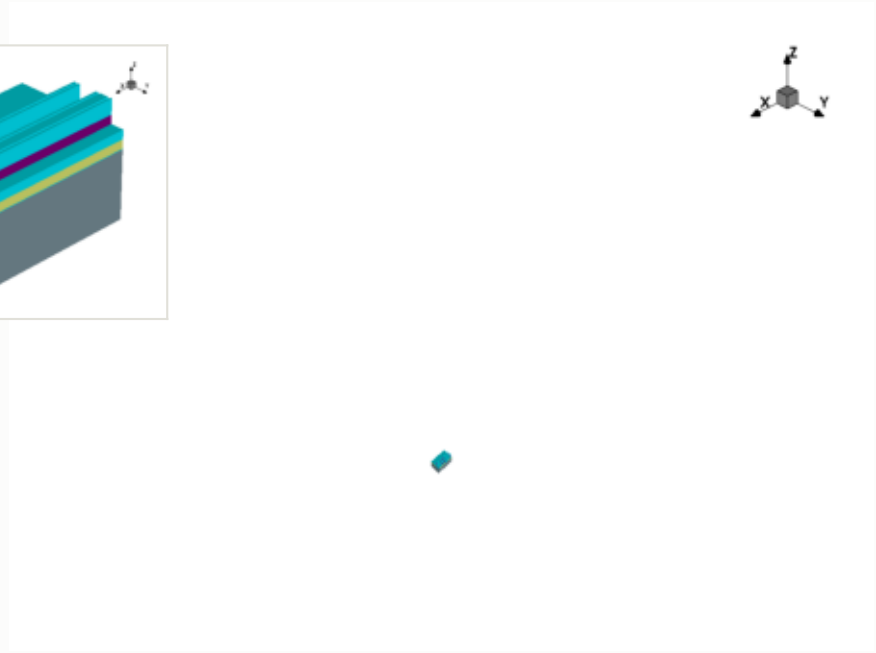

x cut at -0.570 µm

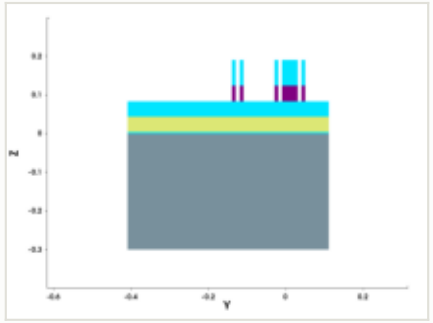

y cut at -0.150 µm

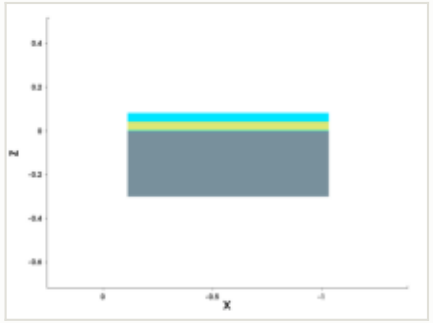

mask for this step

no mask for this step

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

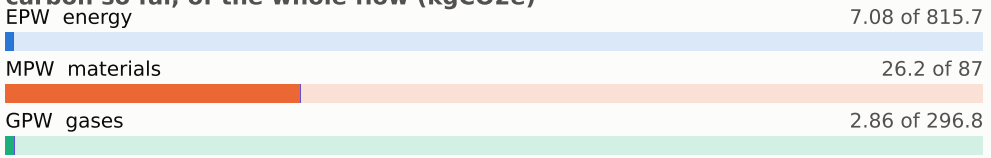

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

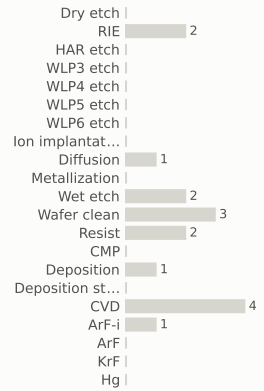

materials deposited (g)

gases emitted (g)

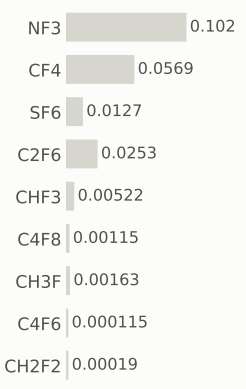

Step #240: Spx_only

etch_anisotropic · Spx_only

0	36.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

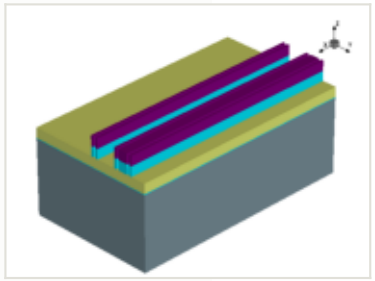

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

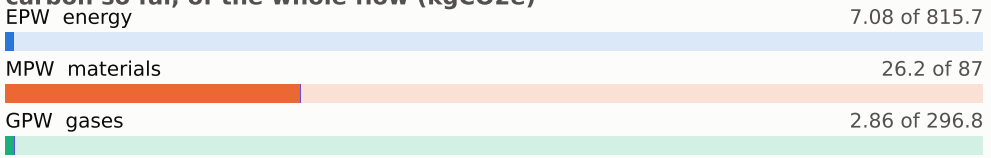

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

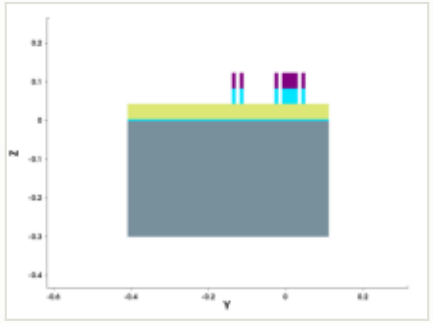

y cut at -0.150 µm

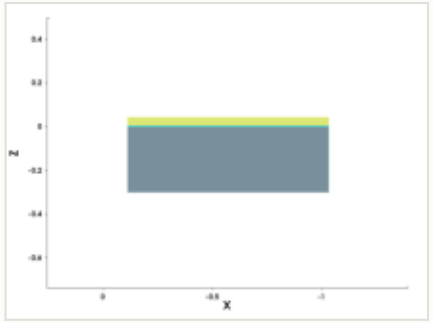

mask for this step

no mask for this step

steps by process area

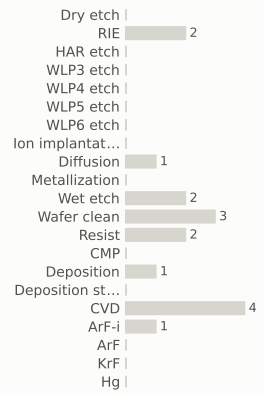

materials deposited (g)

gases emitted (g)

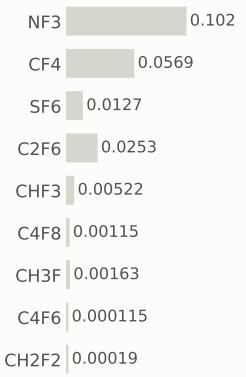

Step #250: Spx_only

etch_anisotropic · Spx_only

0	36.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

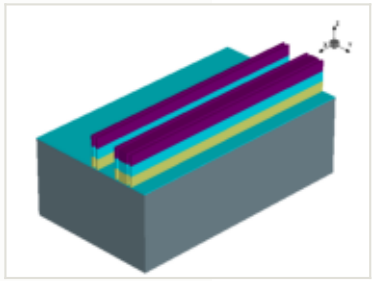

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 7.08 of 815.7

MPW materials 26.2 of 87

GPW gases 2.86 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

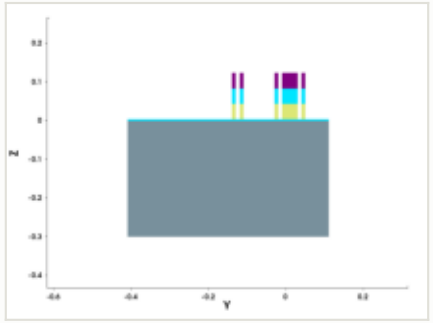

y cut at -0.150 µm

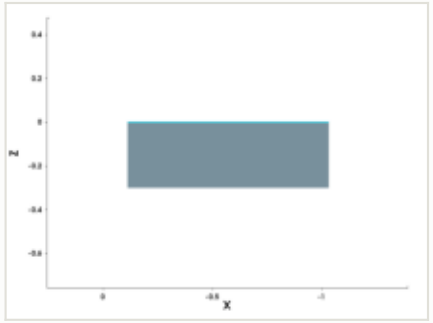

mask for this step

no mask for this step

steps by process area

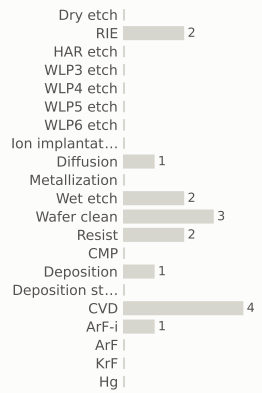

materials deposited (g)

gases emitted (g)

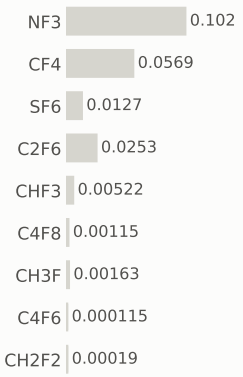

Step #260: Wafer_clean

clean · Wafer_clean

0.169	36.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

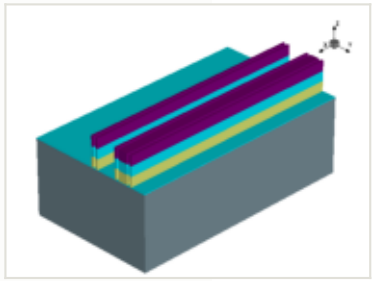

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

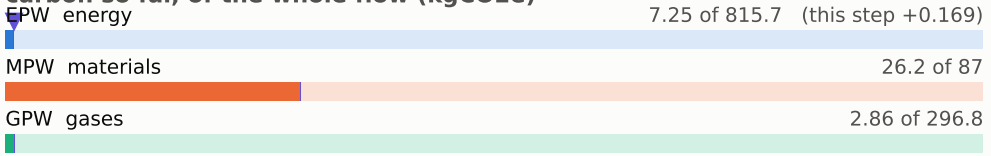

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

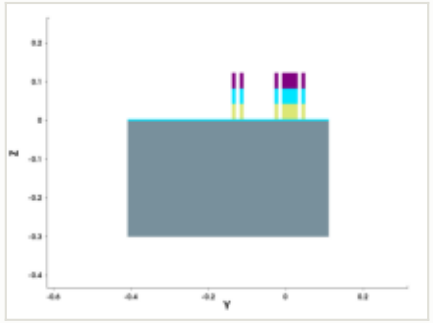

y cut at -0.150 µm

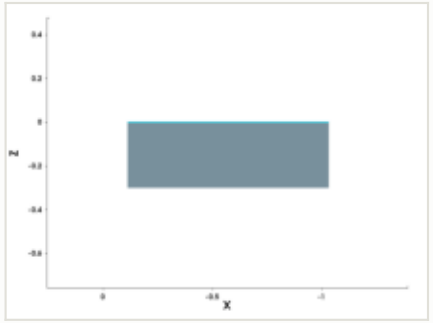

mask for this step

no mask for this step

steps by process area

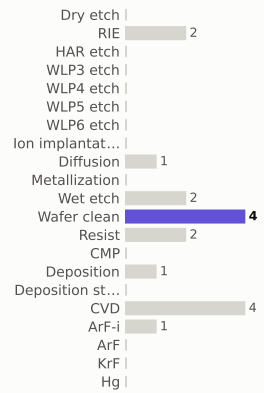

materials deposited (g)

gases emitted (g)

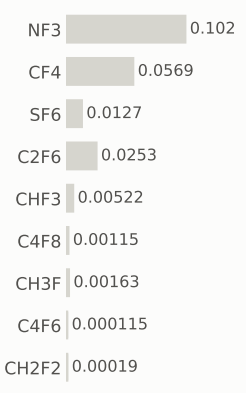

Step #270: Resist

depo_fill · Resist

0.169	36.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

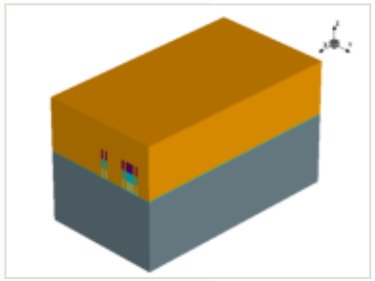

this step

process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

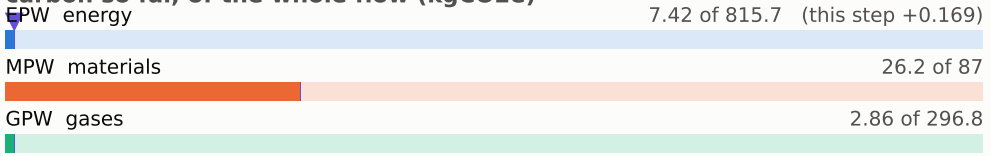

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

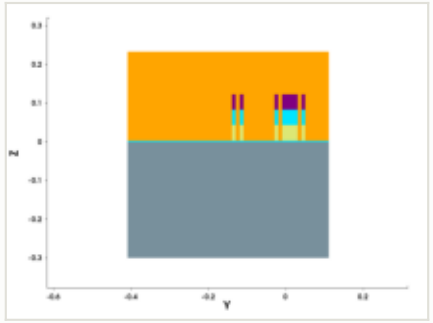

y cut at -0.150 µm

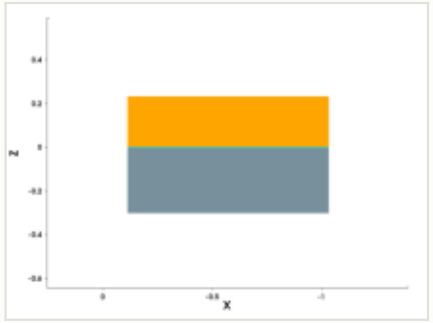

mask for this step

no mask for this step

steps by process area

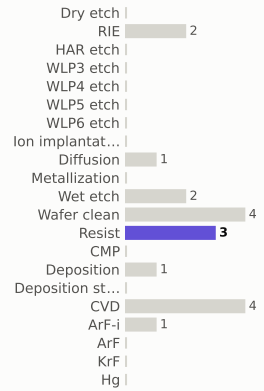

materials deposited (g)

gases emitted (g)

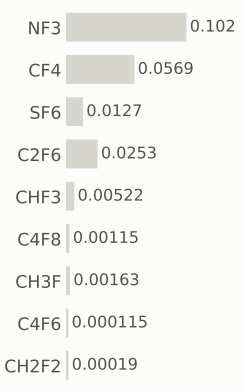

Step #280: CVD

depo_isotropic · CVD

1.31	37.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

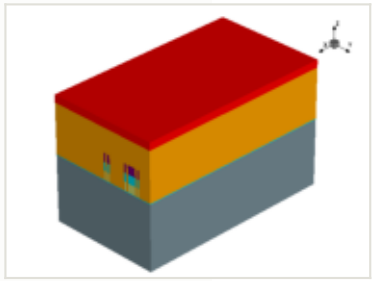

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

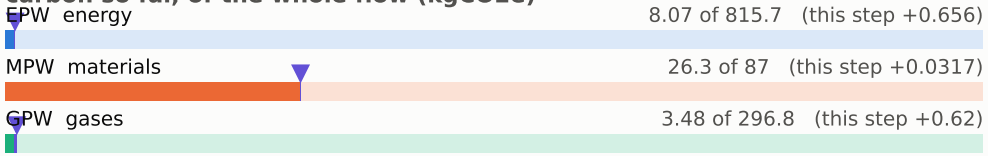

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

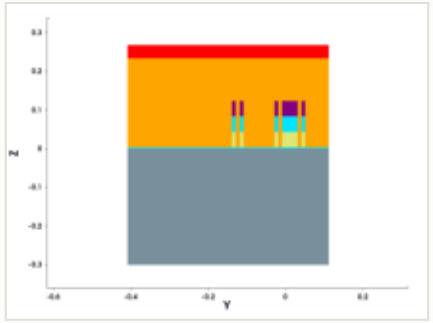

y cut at -0.150 µm

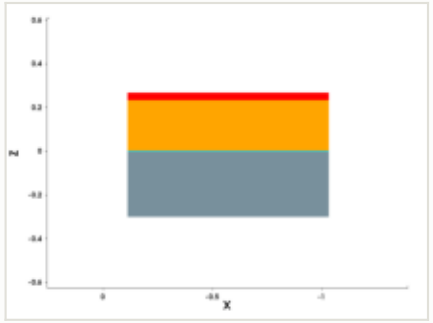

mask for this step

no mask for this step

steps by process area

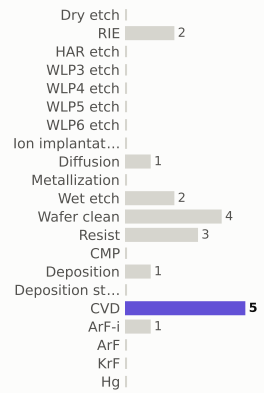

materials deposited (g)

gases emitted (g)



Step #290: Wafer_clean

clean · Wafer_clean

0.169	38	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

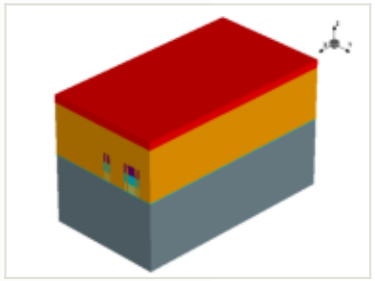

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

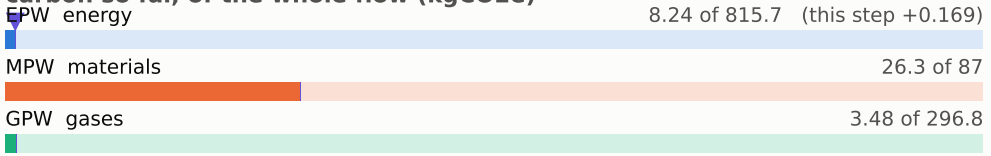

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

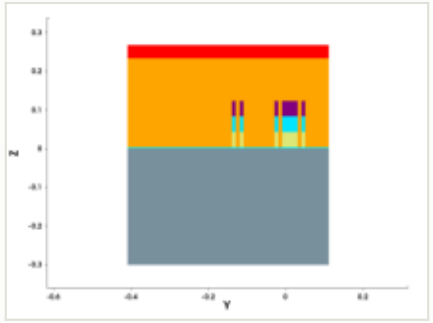

y cut at -0.150 µm

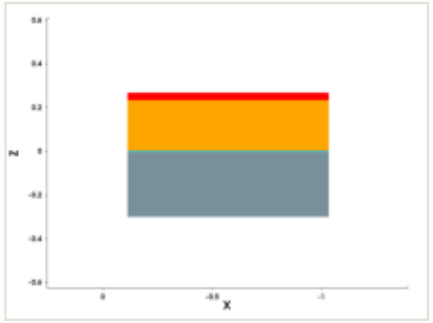

mask for this step

no mask for this step

steps by process area

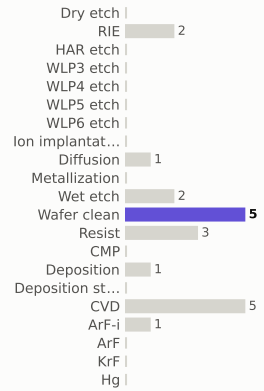

materials deposited (g)

gases emitted (g)

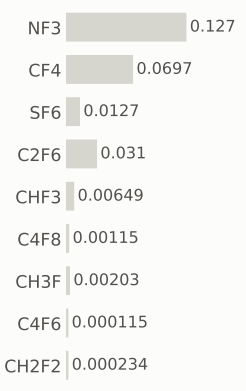

Step #300: Resist

resist · Resist

0.169	38.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

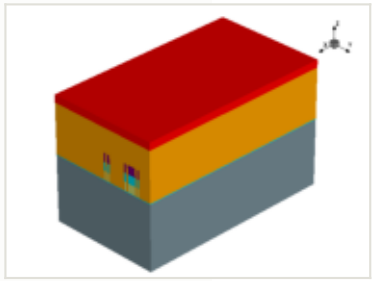

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

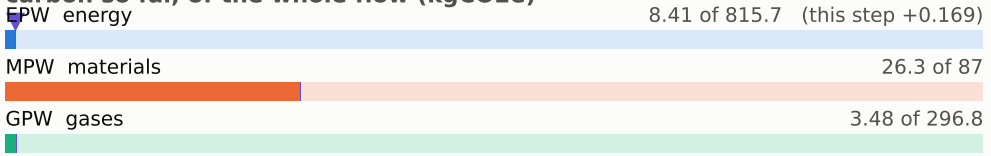

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

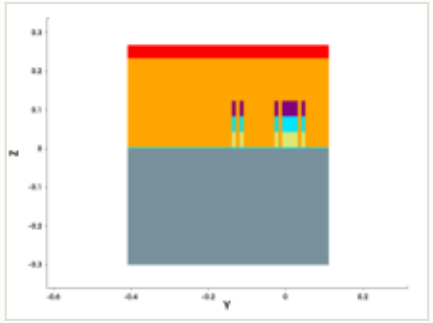

y cut at -0.150 µm

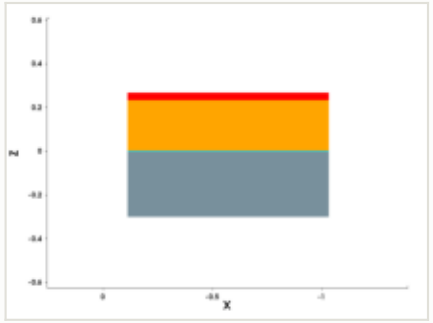

mask for this step

no mask for this step

steps by process area

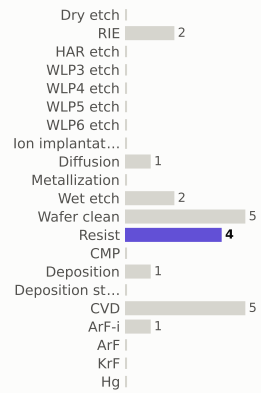

materials deposited (g)

gases emitted (g)

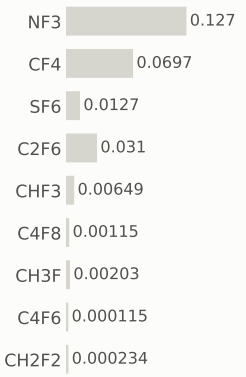

Step #310: ArF-i

litho_patterning · ArF-i

0.217	38.4	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

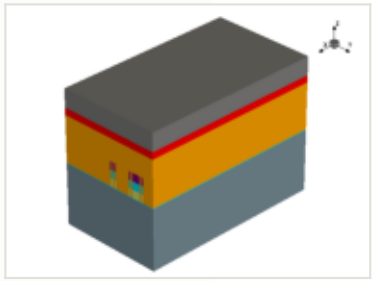

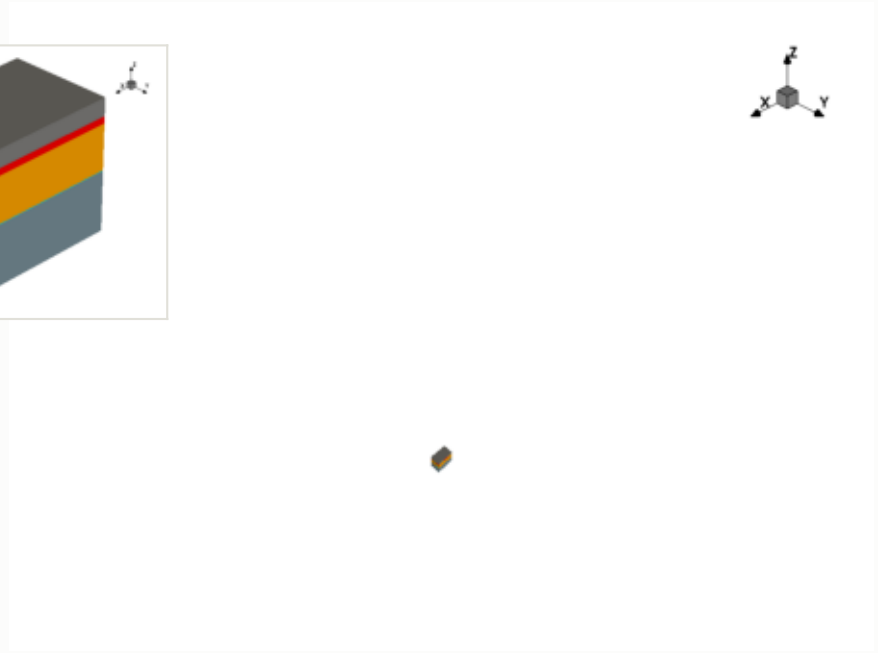

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

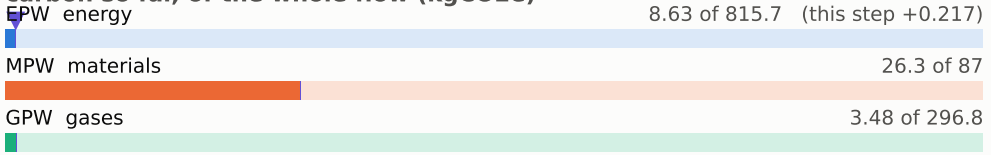

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

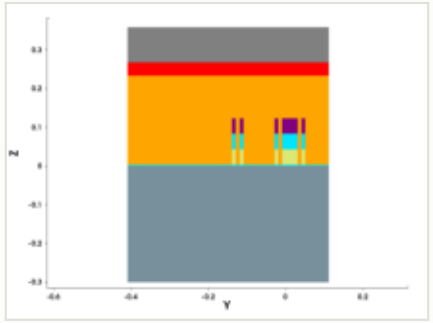

y cut at -0.150 µm

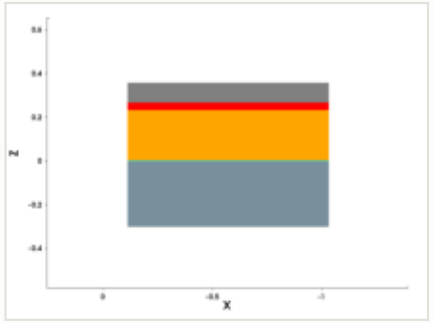

mask: layer 2039:0 (GDSII)

nothing in the clip window

steps by process area

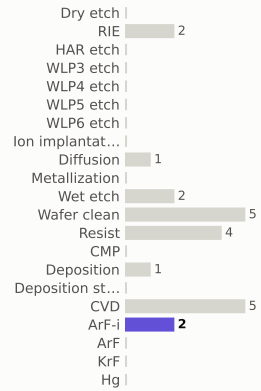

materials deposited (g)

gases emitted (g)

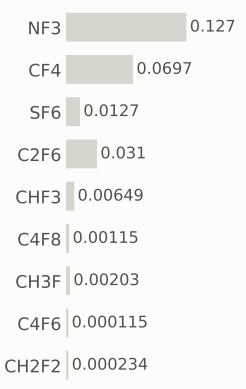

Step #320: RIE

etch_anisotropic · RIE

1.04	39.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

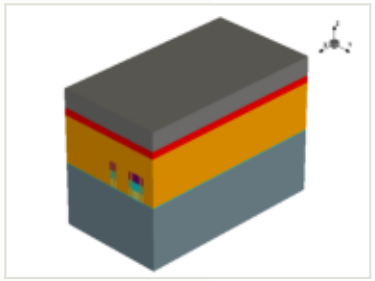

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 9.43 of 815.7 (this step +0.801)

MPW materials — 26.3 of 87 (this step +0.0571)

GPW gases — 3.66 of 296.8 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

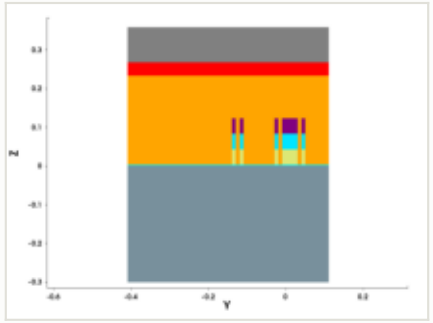

y cut at -0.150 µm

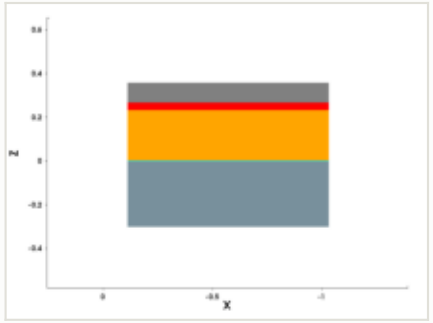

mask for this step

no mask for this step

steps by process area

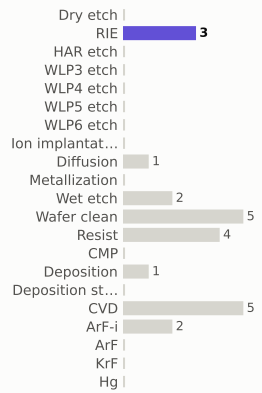

materials deposited (g)

gases emitted (g)

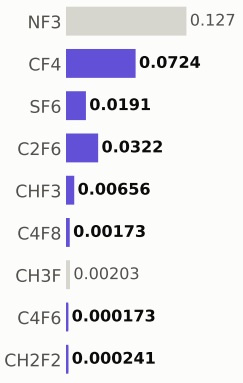

Step #330: Spx_only

etch_anisotropic · Spx_only

0	39.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

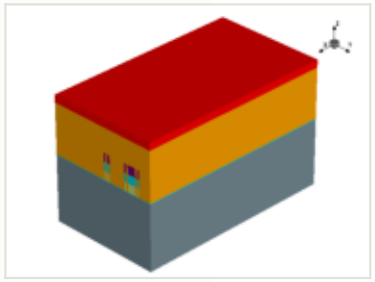

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

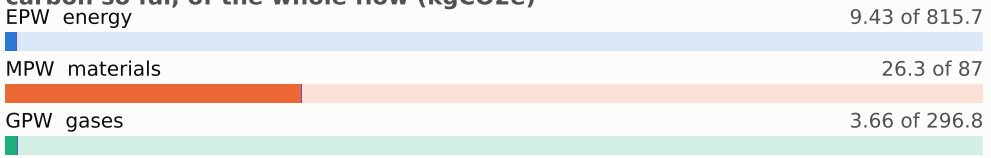

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

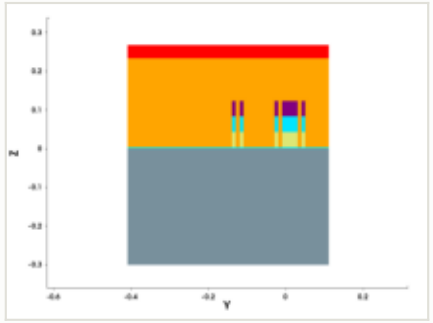

y cut at -0.150 µm

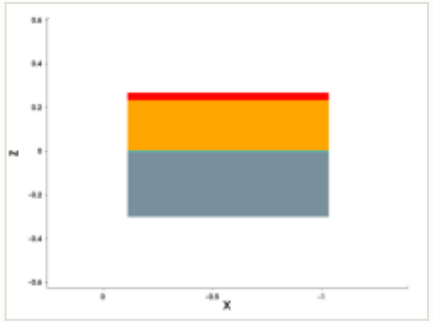

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

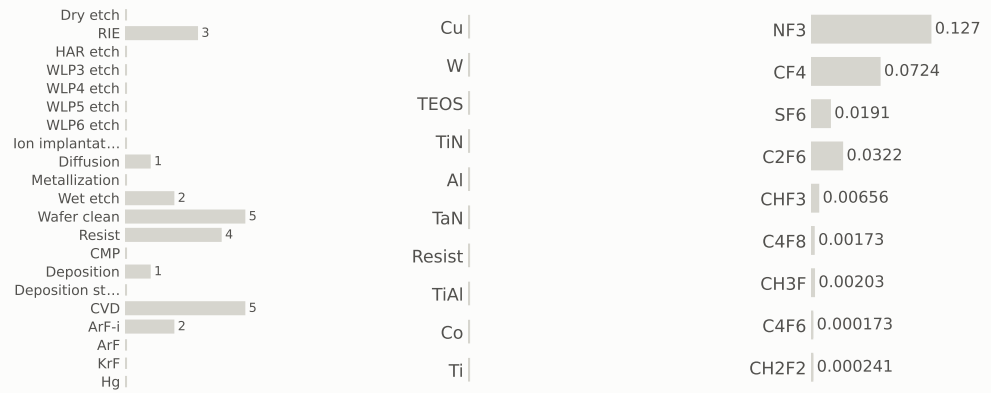

Step #340: Spx_only

etch_anisotropic · Spx_only

0	39.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

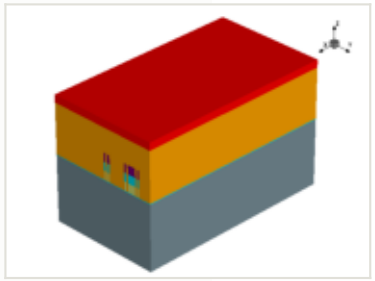

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

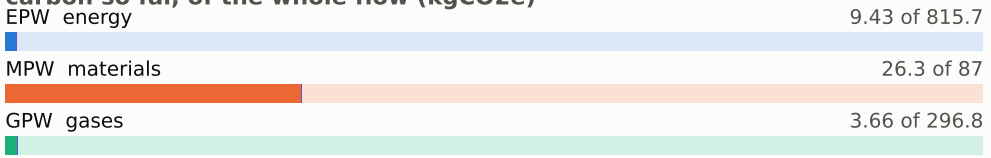

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

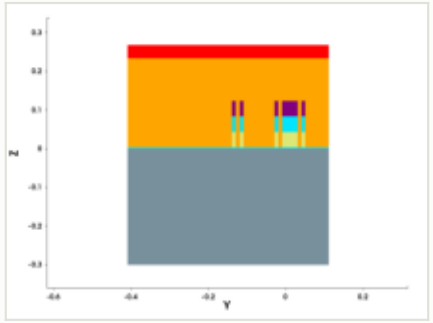

y cut at -0.150 µm

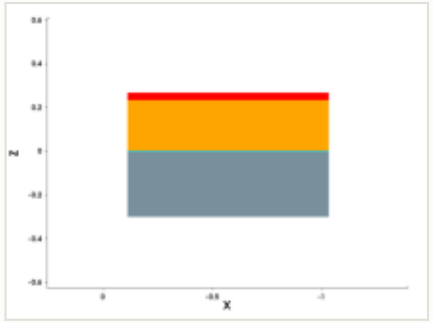

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

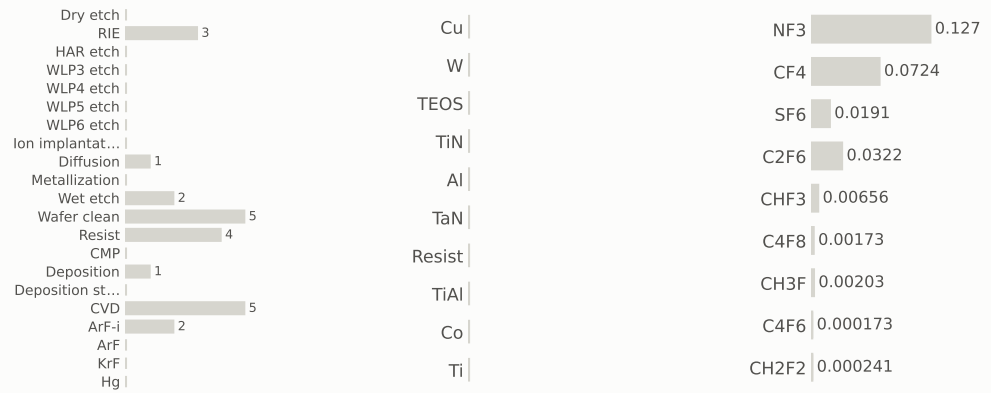

Step #350: Spx_only

etch_anisotropic · Spx_only

0	39.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

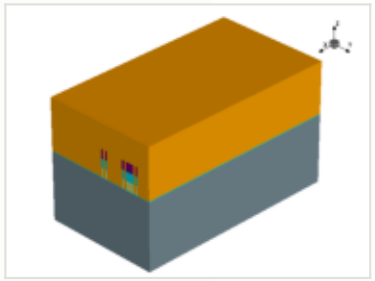

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 9.43 of 815.7

MPW materials 26.3 of 87

GPW gases 3.66 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

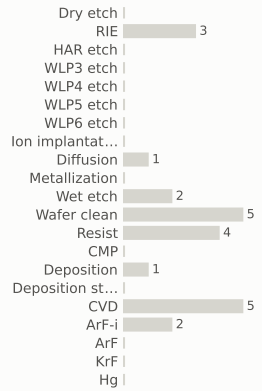

materials deposited (g)

gases emitted (g)

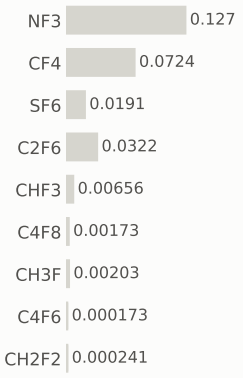

x cut at -0.570 µm

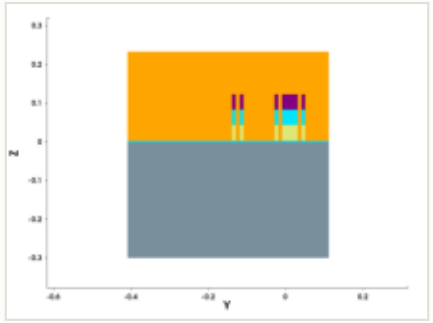

y cut at -0.150 µm

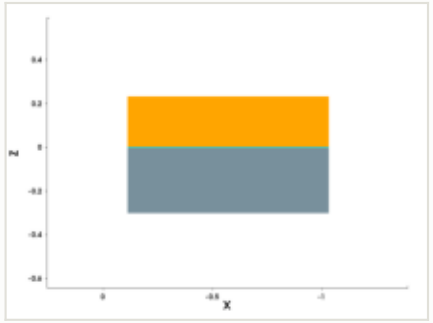

mask for this step

no mask for this step

Step #360: Spx_only

etch_anisotropic · Spx_only

0	39.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

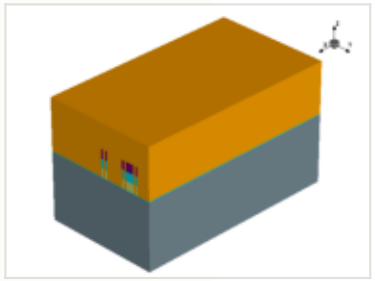

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 9.43 of 815.7

MPW materials 26.3 of 87

GPW gases 3.66 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

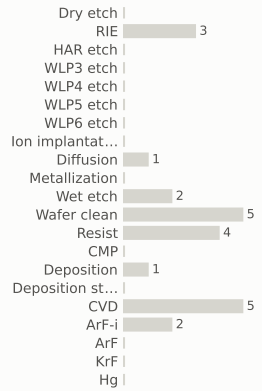

materials deposited (g)

gases emitted (g)

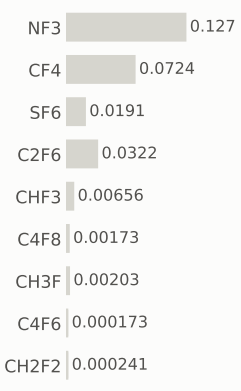

x cut at -0.570 µm

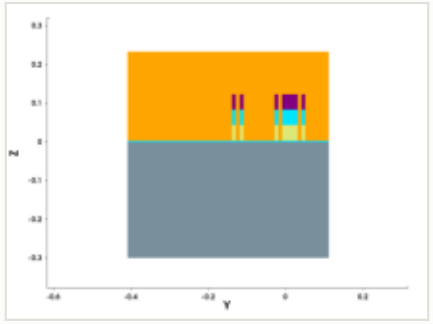

y cut at -0.150 µm

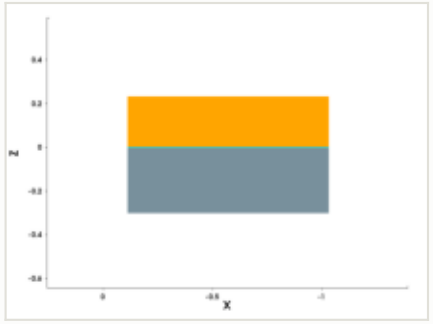

mask for this step

no mask for this step

Step #370: Spx_only

etch_strip · Spx_only

0	39.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

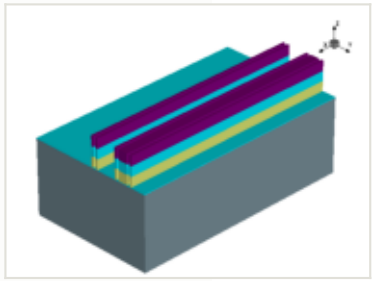

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

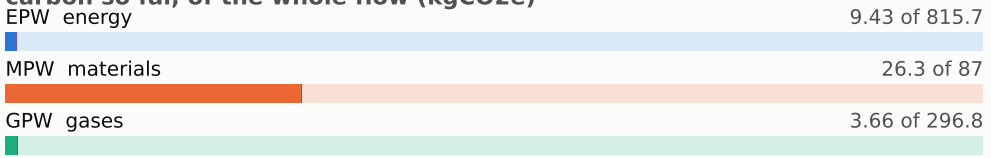

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

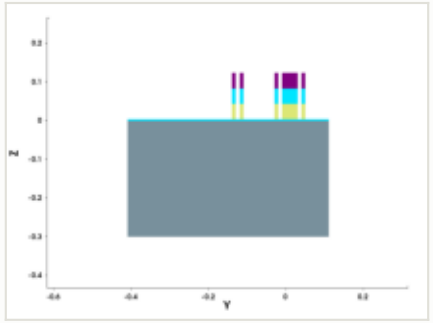

y cut at -0.150 µm

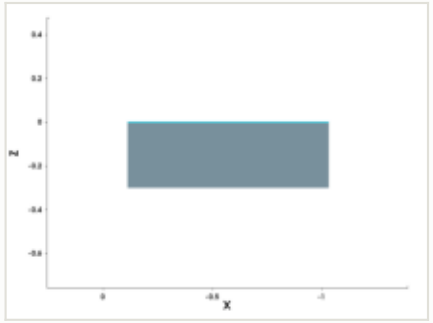

mask for this step

no mask for this step

steps by process area

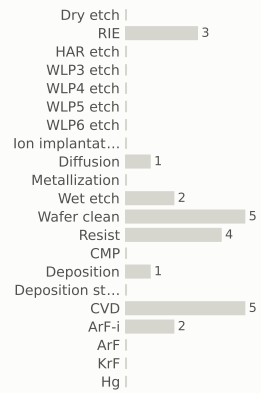

materials deposited (g)

gases emitted (g)

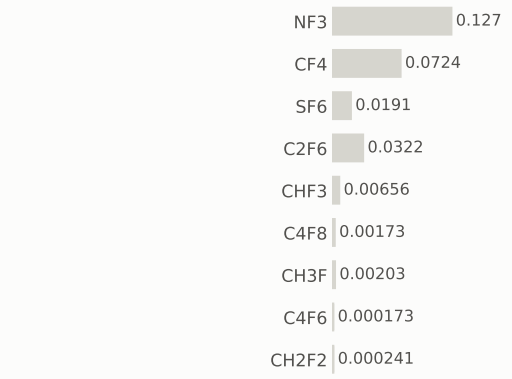

Step #380: Wafer_clean

clean · Wafer_clean

0.169	39.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

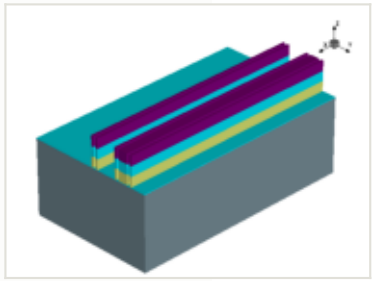

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

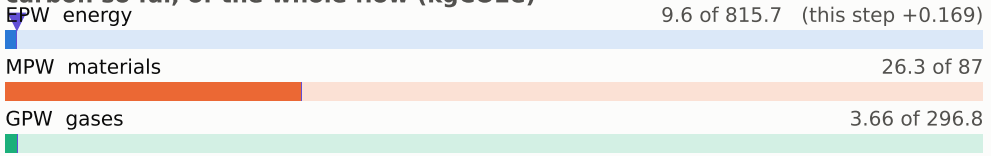

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

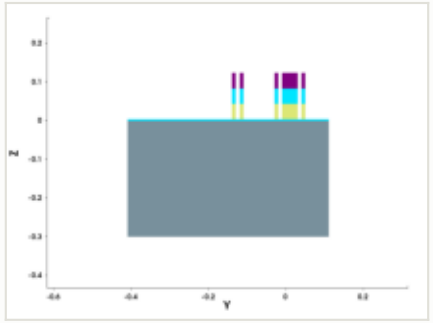

y cut at -0.150 µm

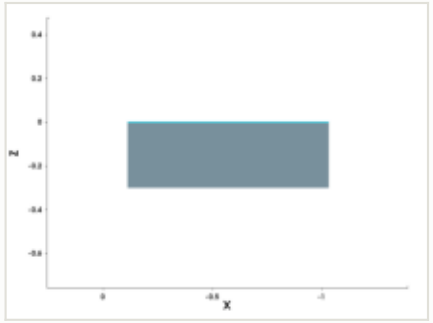

mask for this step

no mask for this step

steps by process area

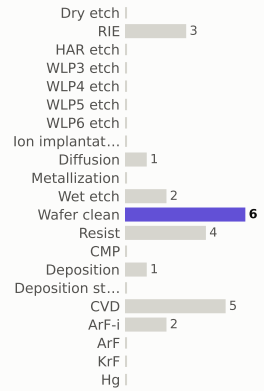

materials deposited (g)

gases emitted (g)

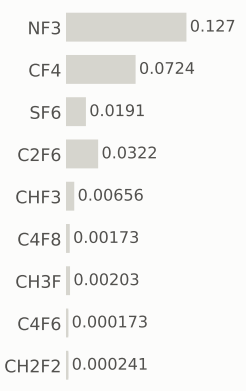

Step #390: Resist

resist · Resist

0.169	39.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

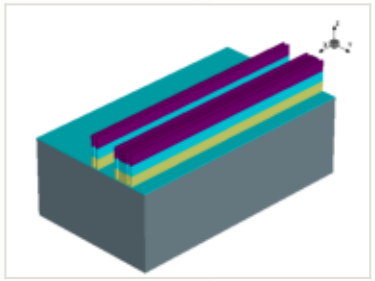

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

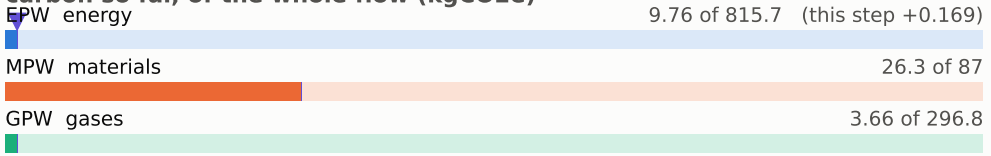

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

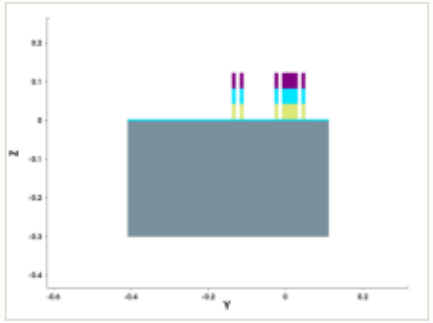

y cut at -0.150 µm

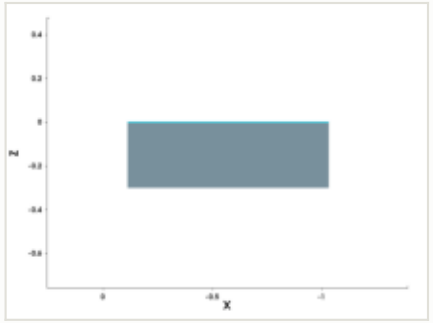

mask for this step

no mask for this step

steps by process area

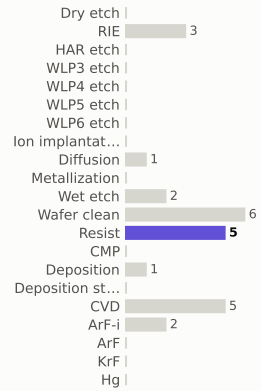

materials deposited (g)

gases emitted (g)

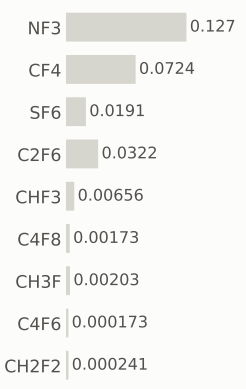

Step #400: Hg

litho_patterning · Hg

0.199	40	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

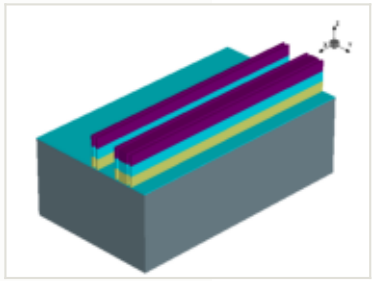

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

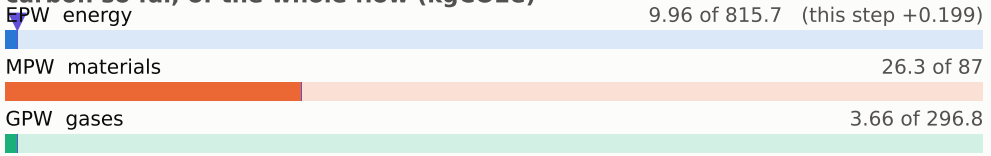

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

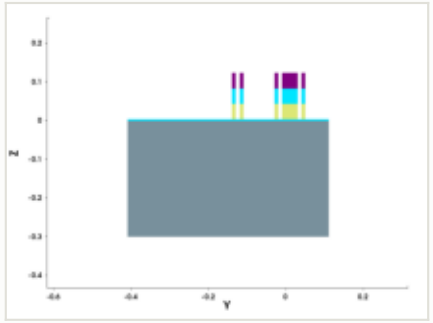

y cut at -0.150 µm

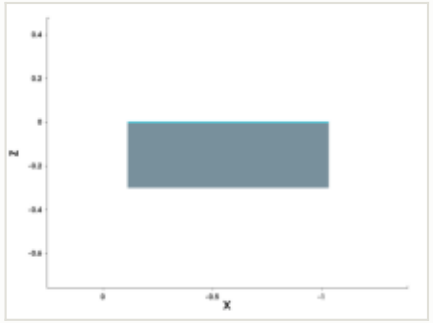

mask for this step

no mask for this step

steps by process area

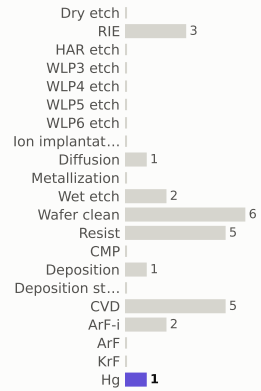

materials deposited (g)

gases emitted (g)

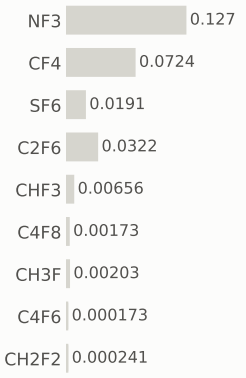

Step #410: Spx_only

etch_anisotropic · Spx_only

0	40	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

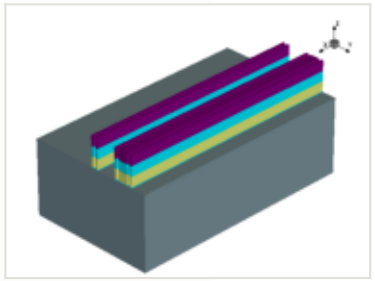

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

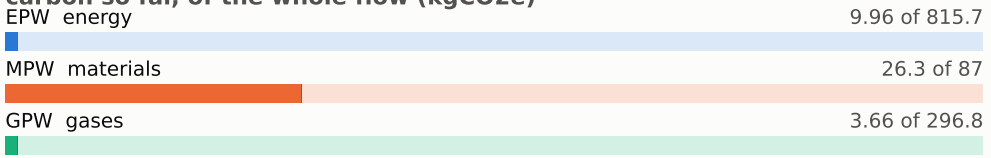

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

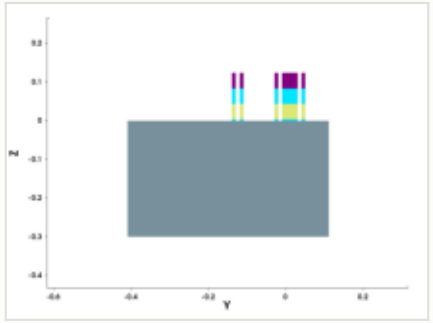

y cut at -0.150 µm

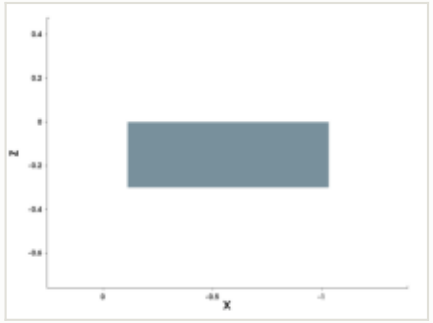

mask for this step

no mask for this step

steps by process area

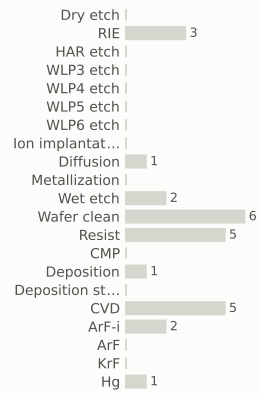

materials deposited (g)

gases emitted (g)

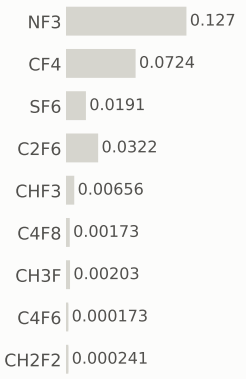

Step #420: RIE

etch_anisotropic · RIE

1.04	41	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

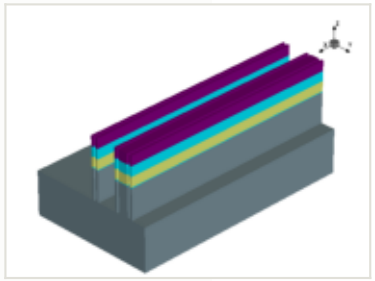

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 10.8 of 815.7 (this step +0.801)

MPW materials — 26.4 of 87 (this step +0.0571)

GPW gases — 3.85 of 296.8 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

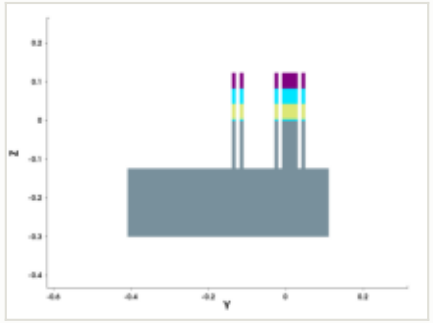

y cut at -0.150 µm

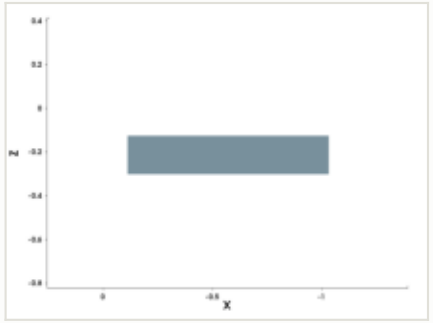

mask for this step

no mask for this step

steps by process area

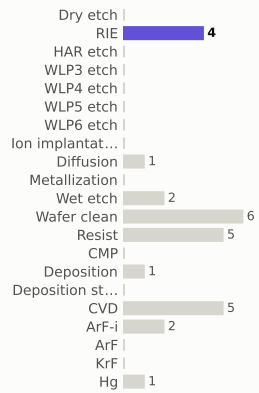

materials deposited (g)

gases emitted (g)

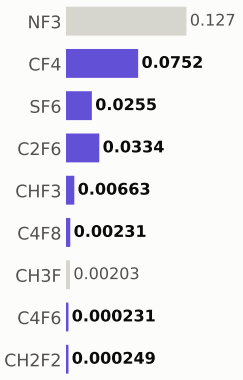

Step #430: Dry_etch

etch_isotropic · Dry_etch

0.801	41.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

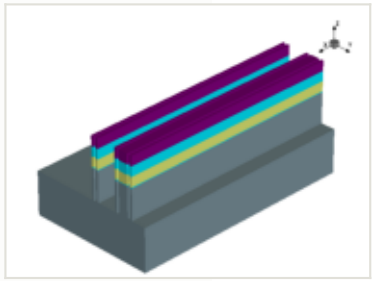

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

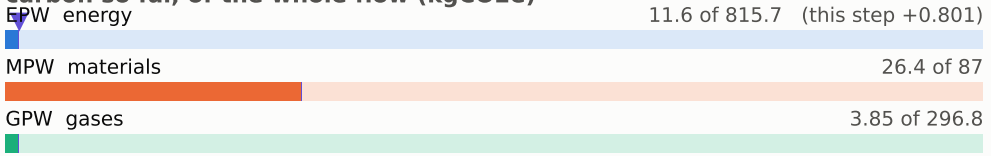

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

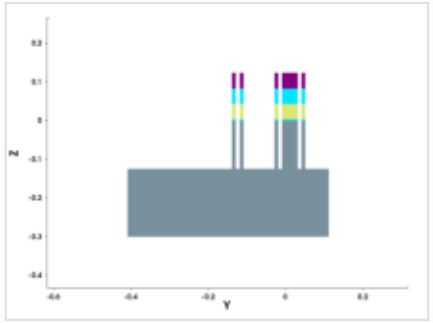

y cut at -0.150 µm

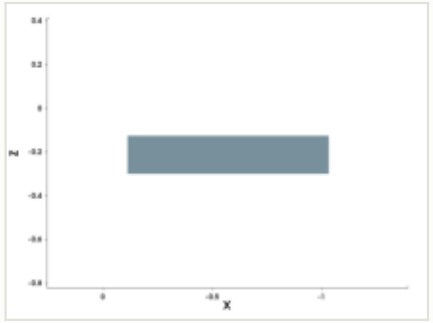

mask for this step

no mask for this step

steps by process area

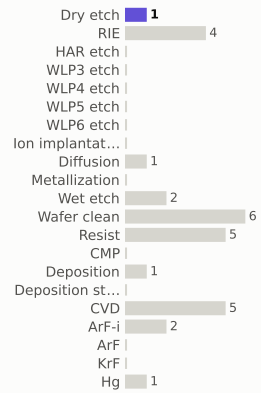

materials deposited (g)

gases emitted (g)

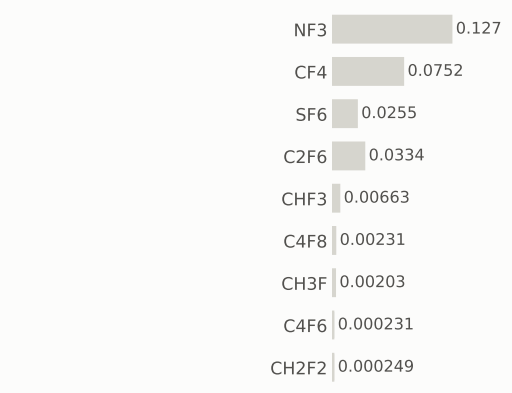

Step #440: Spx_only

etch_microloading · Spx_only

0	41.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

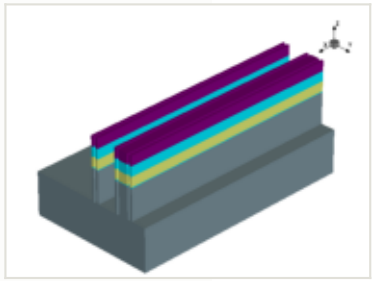

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 11.6 of 815.7

MPW materials 26.4 of 87

GPW gases 3.85 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

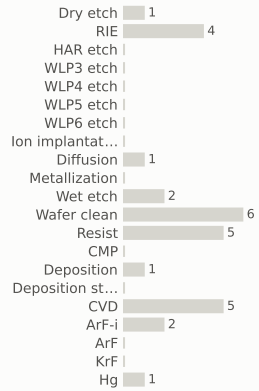

materials deposited (g)

gases emitted (g)

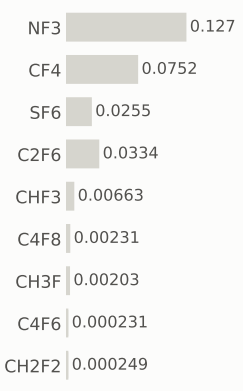

x cut at -0.570 µm

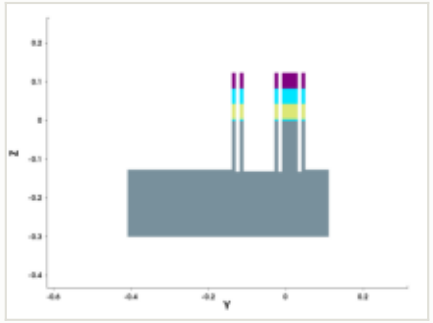

y cut at -0.150 µm

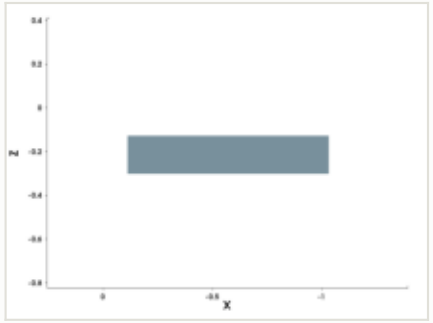

mask for this step

no mask for this step

Step #450: Spx_only

etch_isotropic · Spx_only

0	41.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

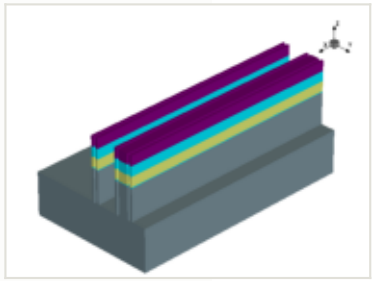

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 11.6 of 815.7

MPW materials 26.4 of 87

GPW gases 3.85 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

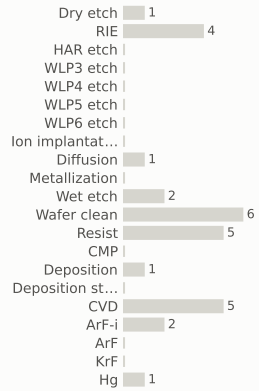

materials deposited (g)

gases emitted (g)

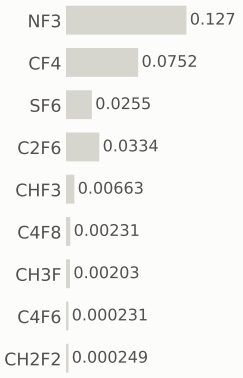

x cut at -0.570 µm

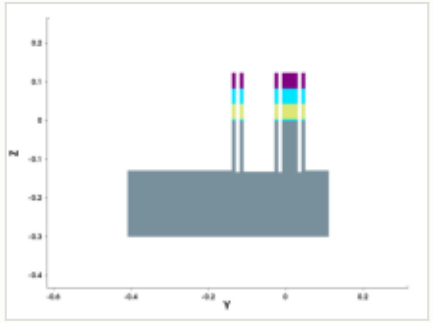

y cut at -0.150 µm

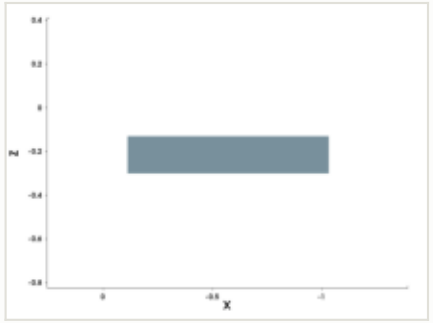

mask for this step

no mask for this step

Step #460: Spx_only

etch_strip · Spx_only

0	41.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

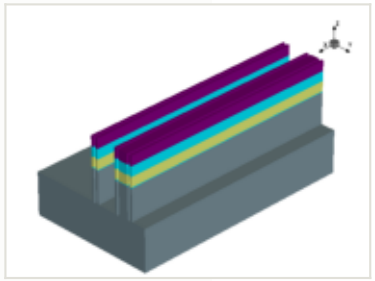

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

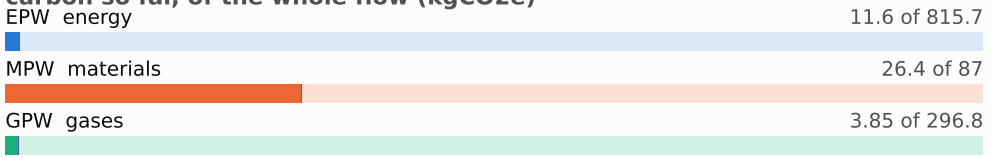

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

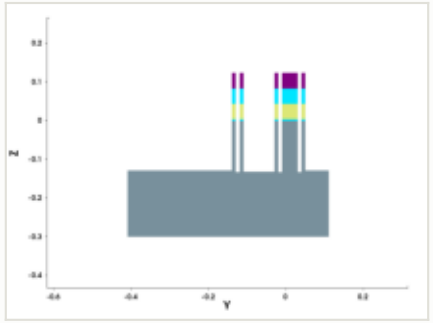

y cut at -0.150 µm

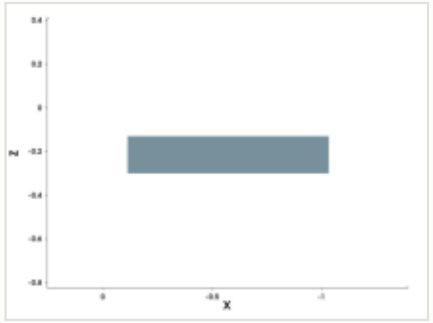

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

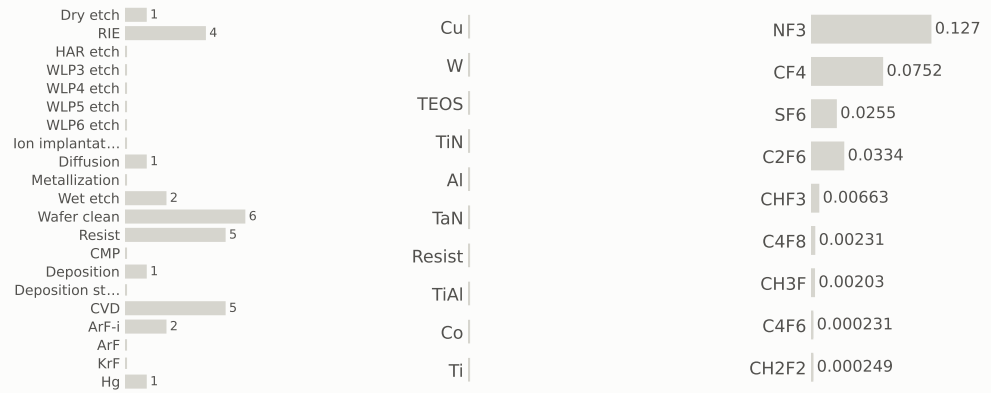

Step #470: Wafer_clean

clean · Wafer_clean

0.169	42	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

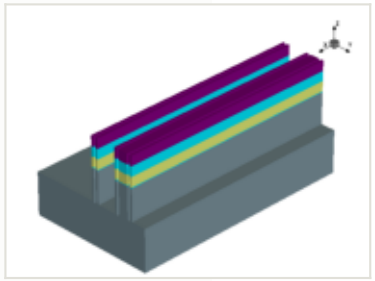

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

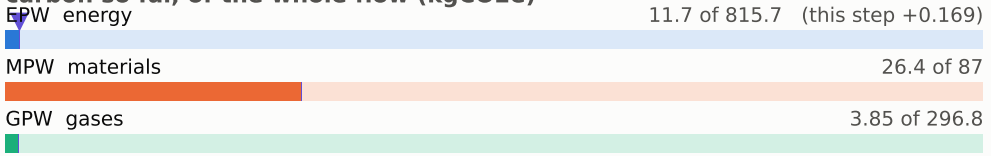

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

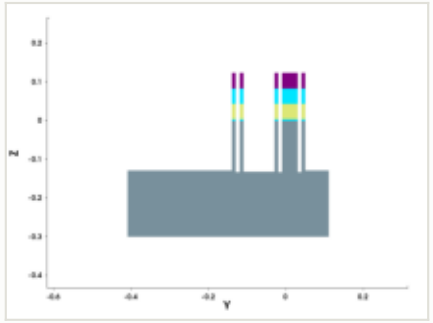

y cut at -0.150 µm

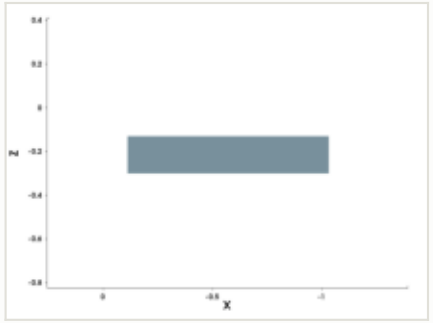

mask for this step

no mask for this step

steps by process area

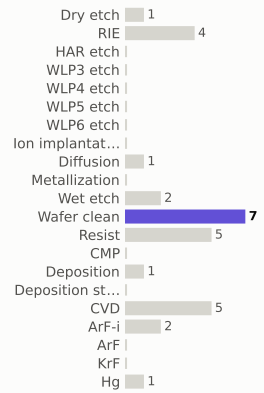

materials deposited (g)

gases emitted (g)

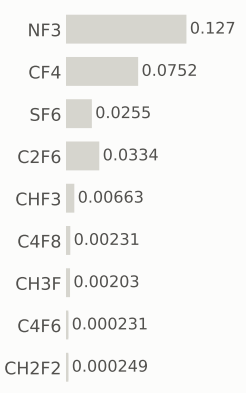

Step #480: Wafer_clean

clean · Wafer_clean

0.169	42.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

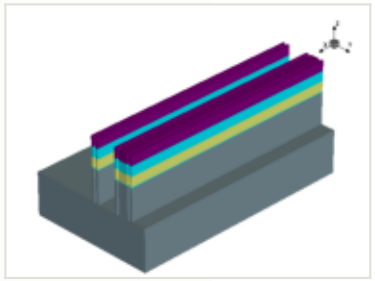

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

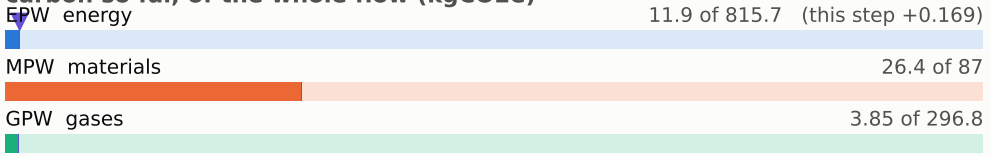

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

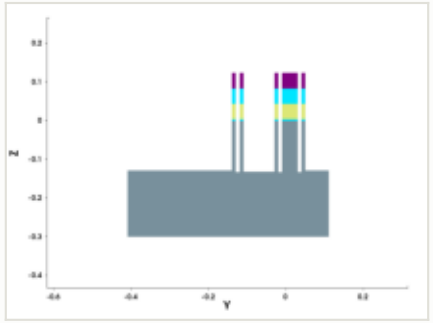

y cut at -0.150 µm

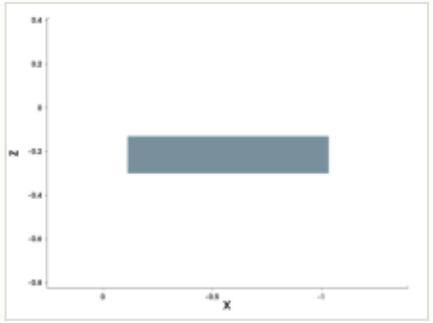

mask for this step

no mask for this step

steps by process area

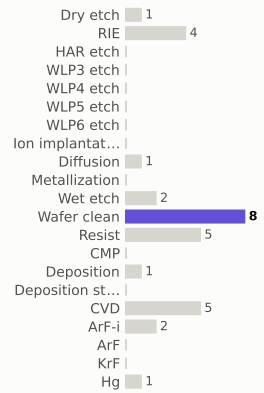

materials deposited (g)

gases emitted (g)

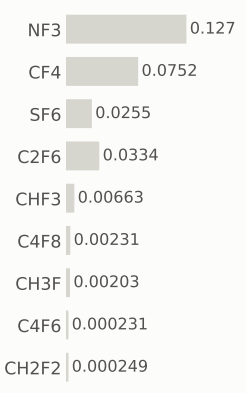

Step #490: Diffusion

depo_isotropic · Diffusion

0.801	42.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

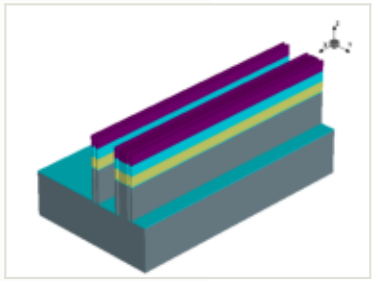

this step

process area	Diffusion
material	—
thickness	0.0035 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

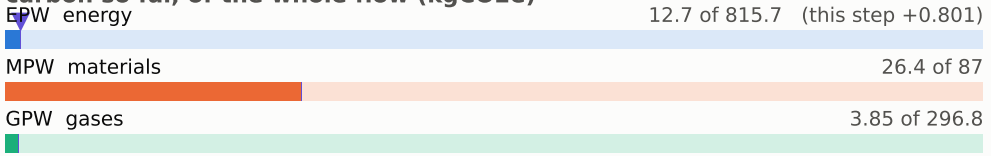

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

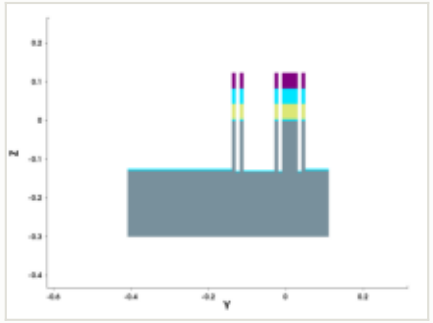

y cut at -0.150 µm

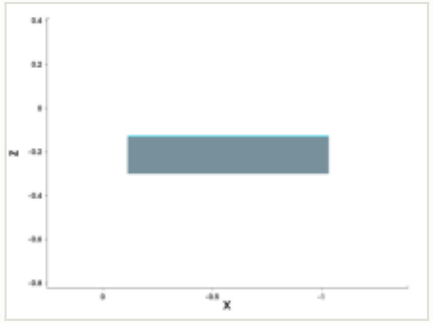

mask for this step

no mask for this step

steps by process area

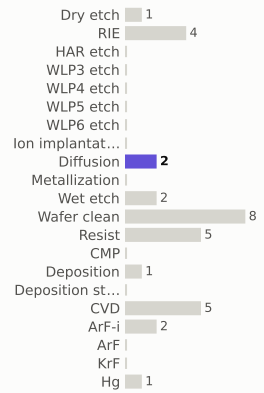

materials deposited (g)

gases emitted (g)

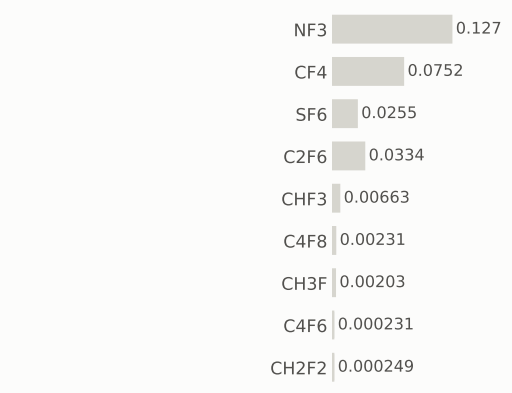

Step #500: CVD

depo_isotropic · CVD

1.31	44.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

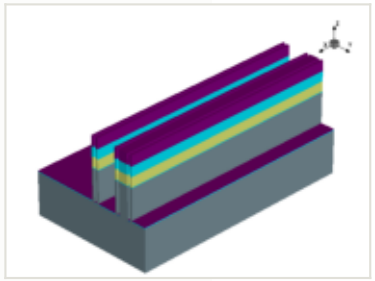

this step

process area	CVD
material	—
thickness	0.002 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

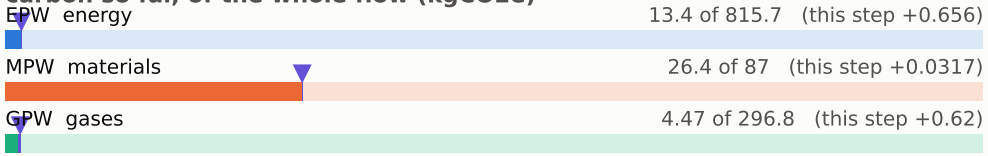

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

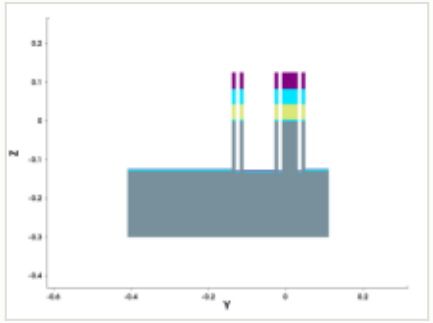

y cut at -0.150 µm

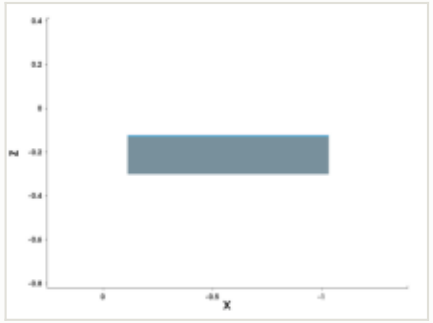

mask for this step

no mask for this step

steps by process area

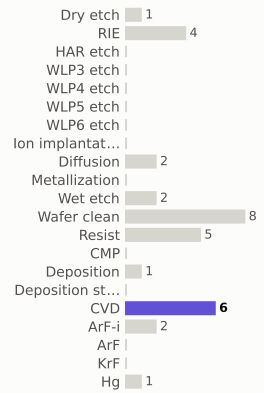

materials deposited (g)

gases emitted (g)

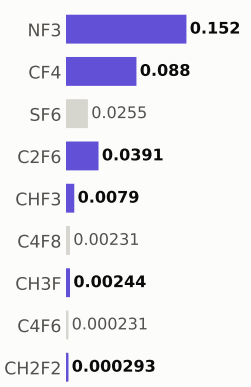

Step #510: Spx_only

etch_isotropic · Spx_only

0	44.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

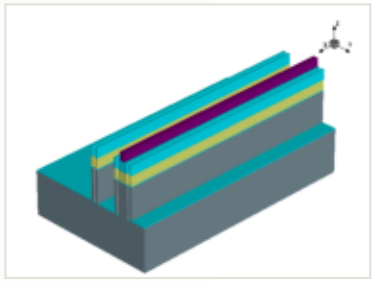

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

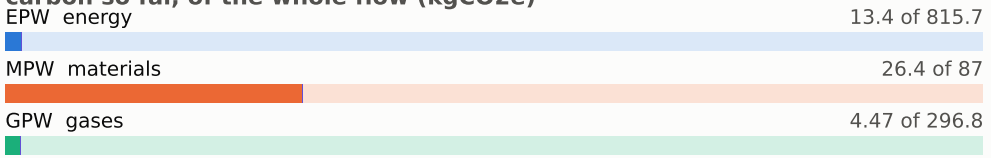

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

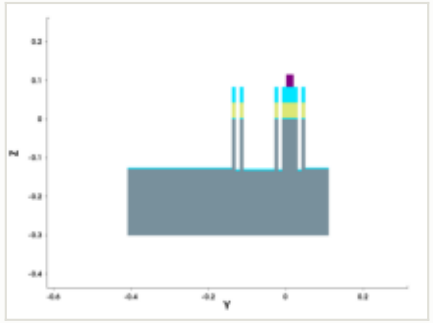

y cut at -0.150 µm

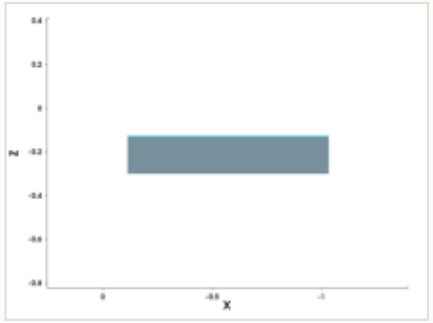

mask for this step

no mask for this step

steps by process area

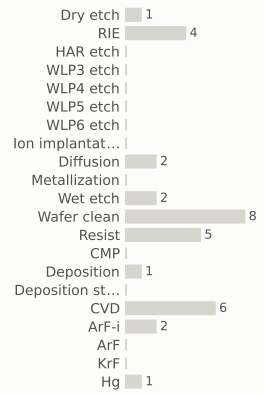

materials deposited (g)

gases emitted (g)

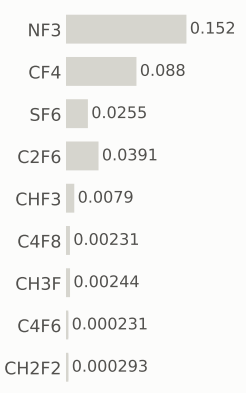

Step #520: Spx_only

depo_isotropic · Spx_only

0	44.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

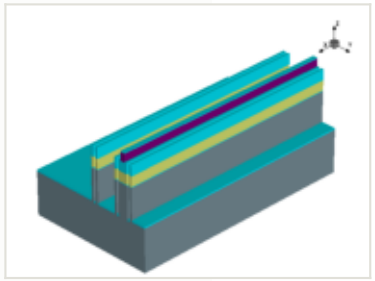

this step

process area	Spx_only
material	—
thickness	0.003 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 13.4 of 815.7

MPW materials 26.4 of 87

GPW gases 4.47 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

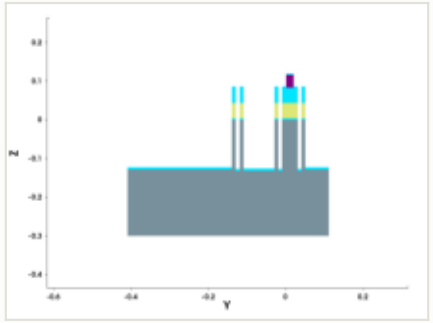

y cut at -0.150 µm

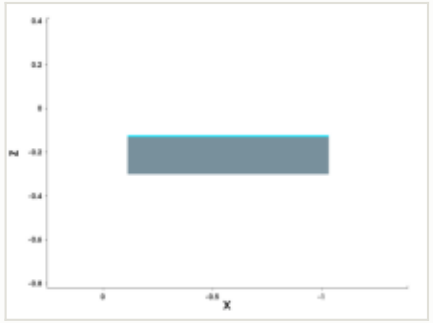

mask for this step

no mask for this step

steps by process area

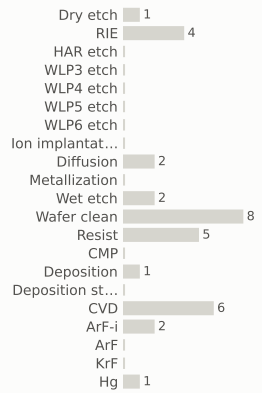

materials deposited (g)

gases emitted (g)

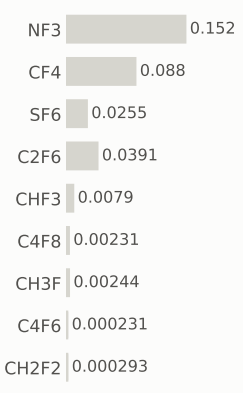

Step #530: CVD

depo_fill · CVD

1.31	45.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

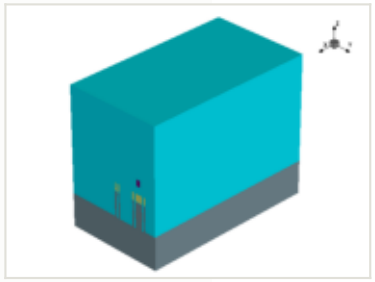

this step

process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

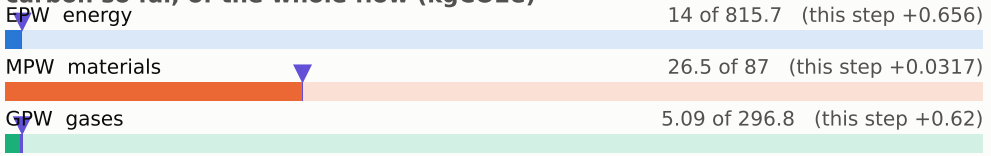

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

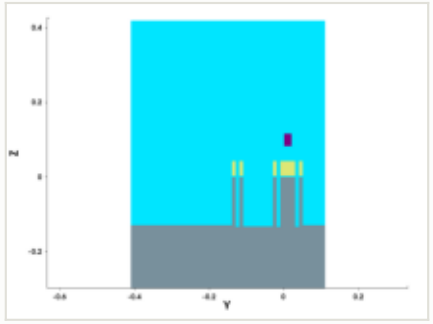

y cut at -0.150 µm

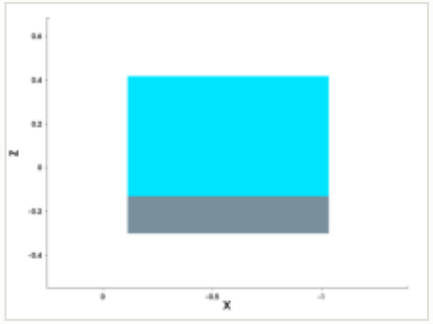

mask for this step

no mask for this step

steps by process area

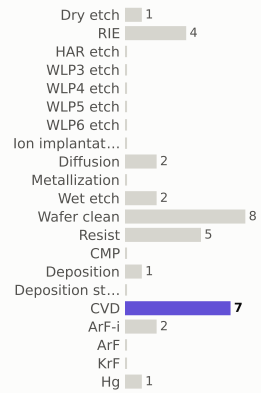

materials deposited (g)

gases emitted (g)

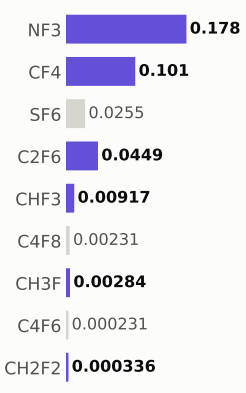

Step #540: Diffusion

anneal · Diffusion

0.801	46.4	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

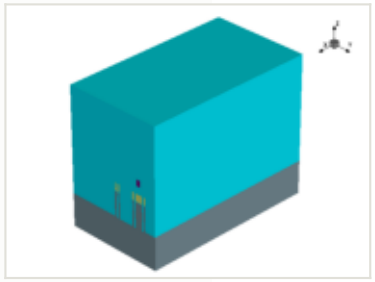

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

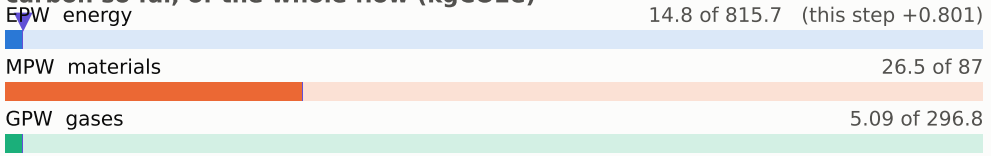

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

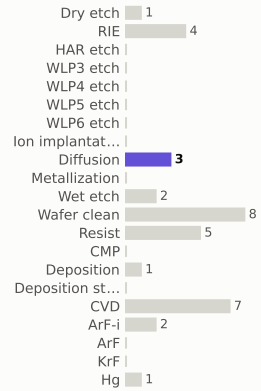

materials deposited (g)

gases emitted (g)

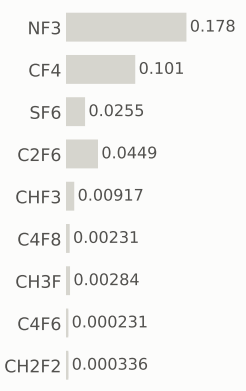

x cut at -0.570 µm

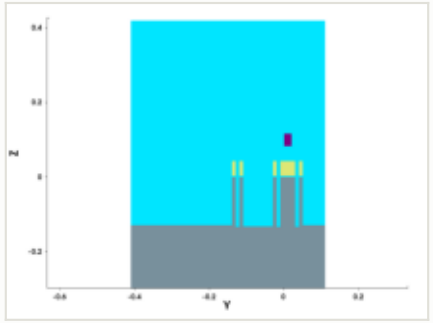

y cut at -0.150 µm

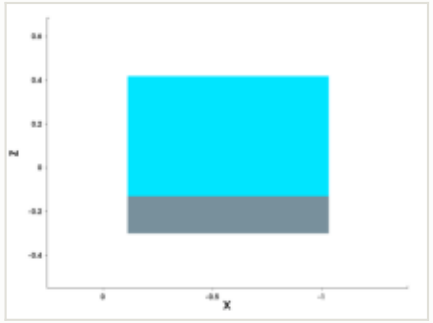

mask for this step

no mask for this step

Step #550: Diffusion

anneal · Diffusion

0.801	47.2	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

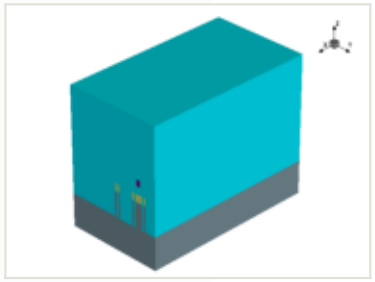

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

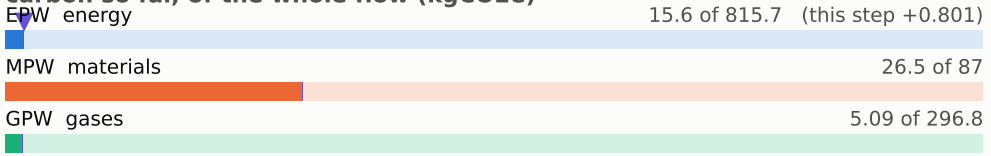

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

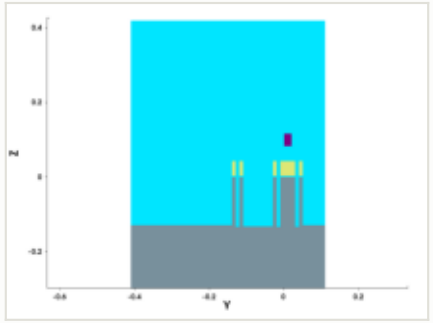

y cut at -0.150 µm

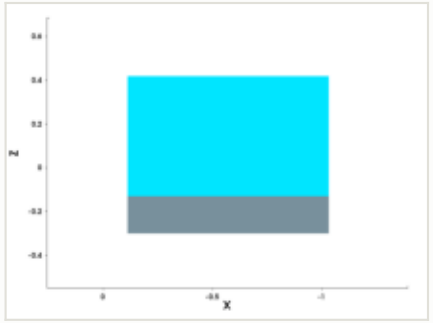

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

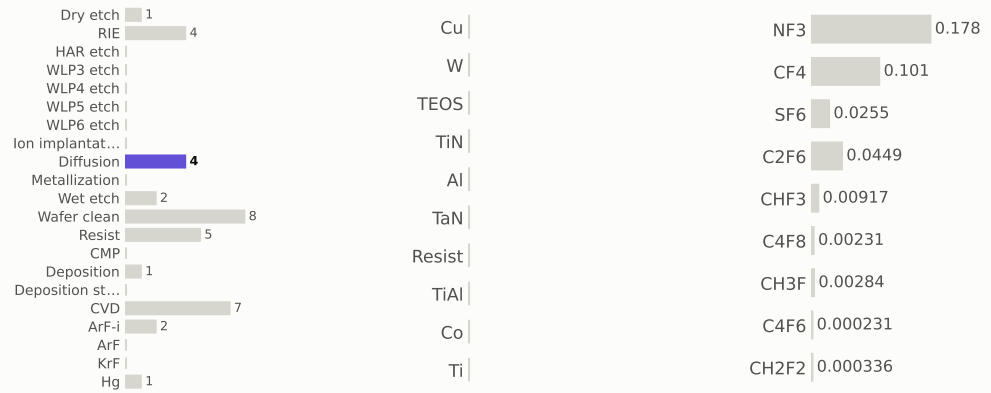

Step #560: CVD

depo_isotropic · CVD

1.31	48.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

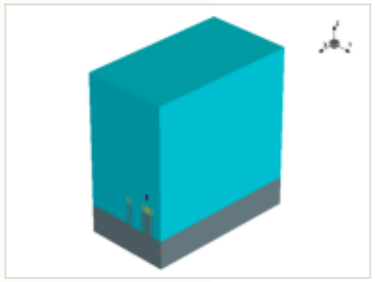

this step

process area	CVD
material	—
thickness	0.25 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 16.3 of 815.7 (this step +0.656)

MPW materials — 26.5 of 87 (this step +0.0317)

GPW gases — 5.71 of 296.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

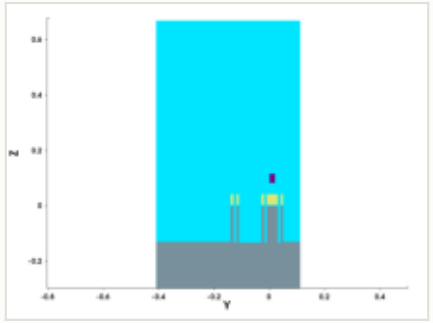

y cut at -0.150 µm

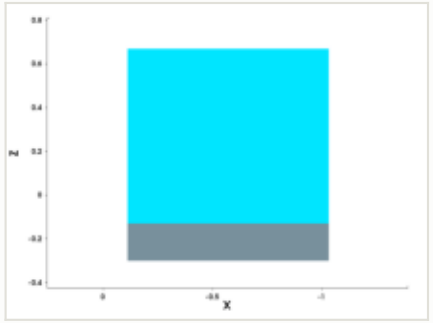

mask for this step

no mask for this step

steps by process area

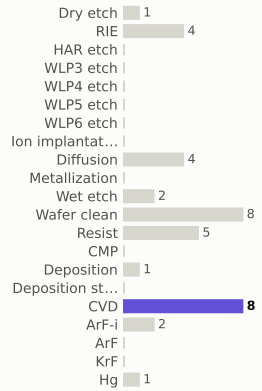

materials deposited (g)

gases emitted (g)

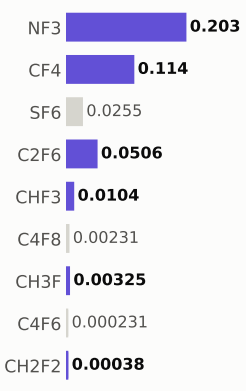

Step #570: CMP

etch_cmp · CMP

0.169	48.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

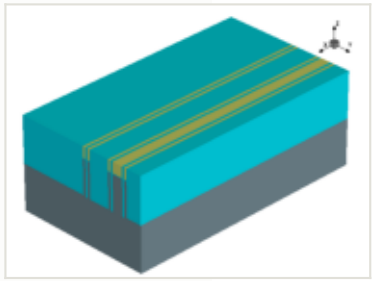

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GPW	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

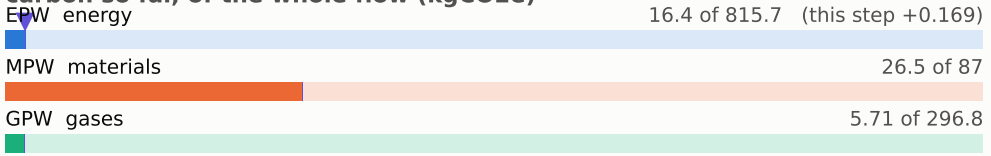

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

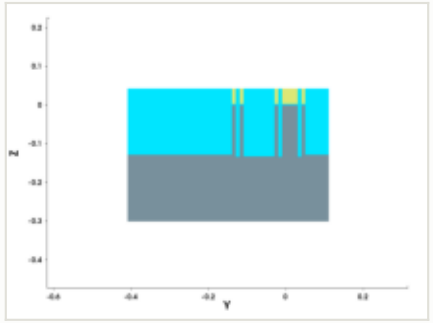

y cut at -0.150 µm

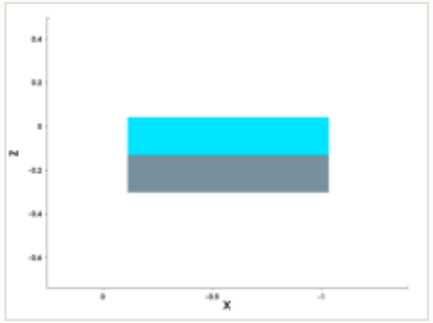

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

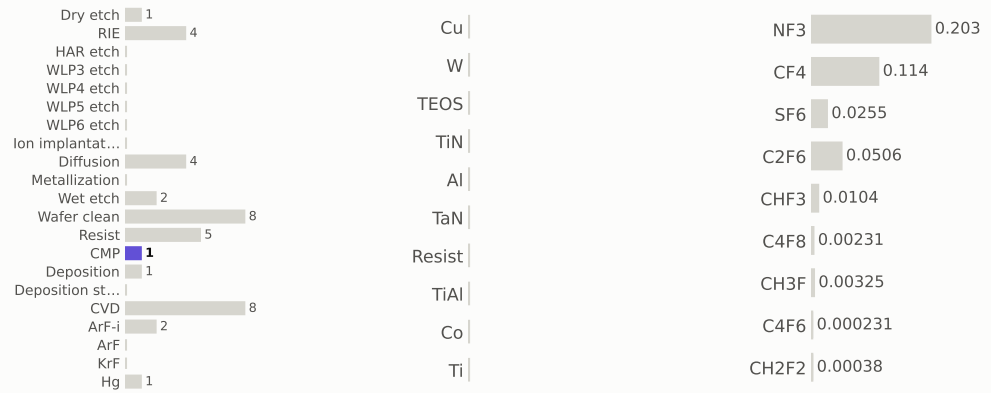

Step #580: Diffusion

anneal · Diffusion

0.801	49.4	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

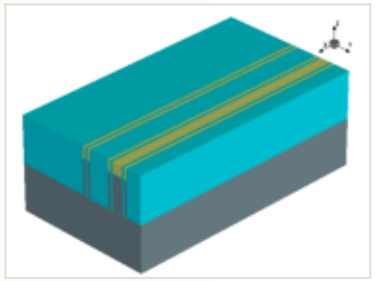

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

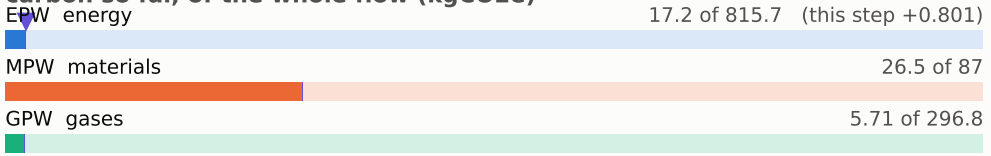

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

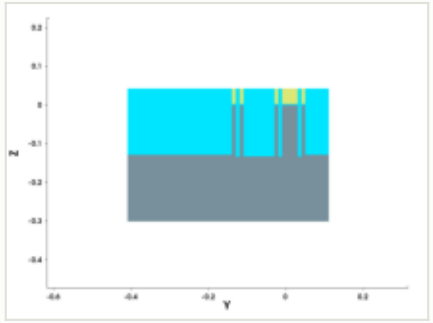

y cut at -0.150 µm

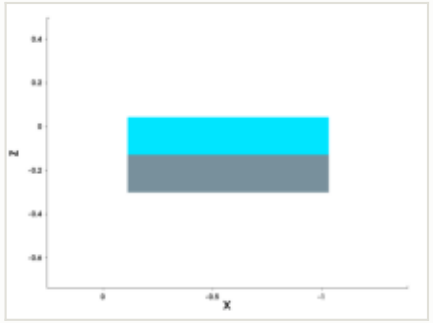

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

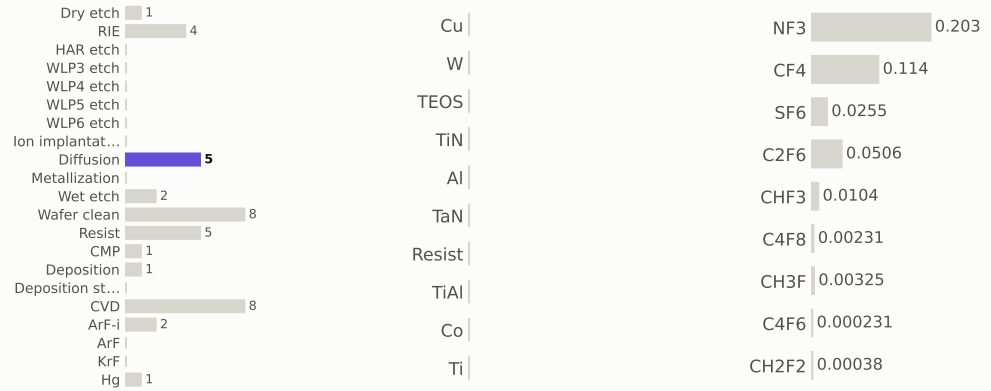

Step #590: CVD

depo_isotropic · CVD

1.31	50.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

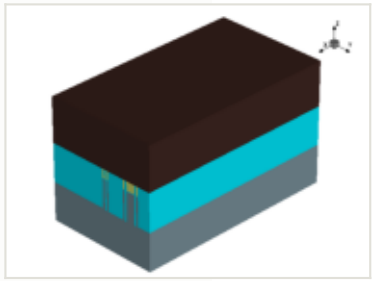

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.2 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

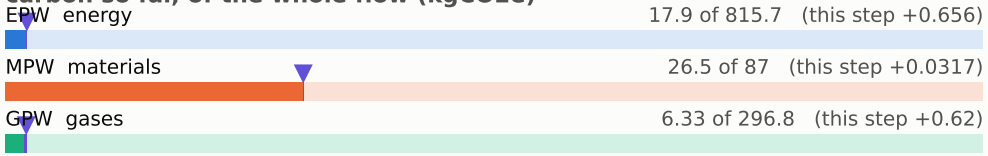

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

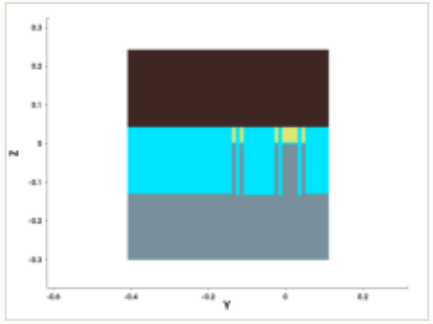

y cut at -0.150 µm

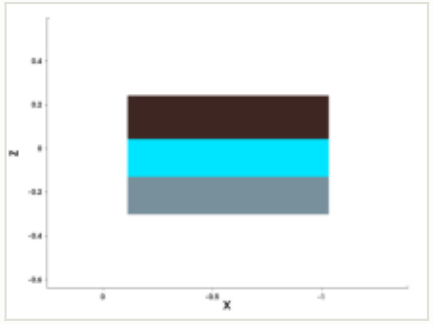

mask for this step

no mask for this step

steps by process area

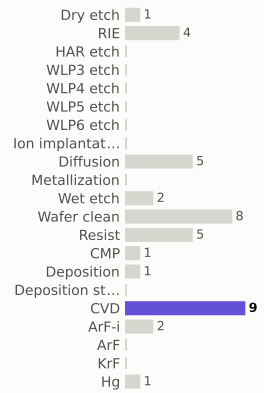

materials deposited (g)

gases emitted (g)



Step #600: RIE

etch_anisotropic · RIE

1.04	51.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

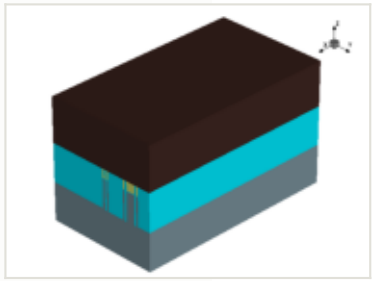

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

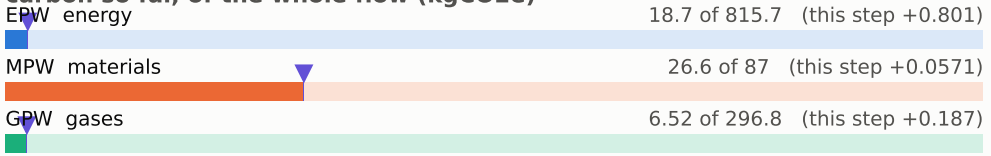

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

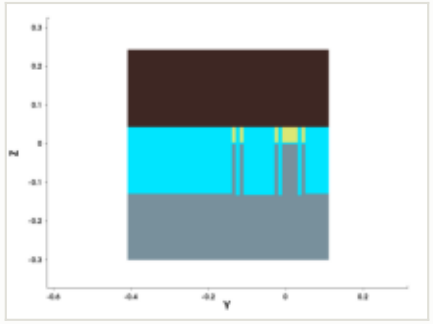

y cut at -0.150 µm

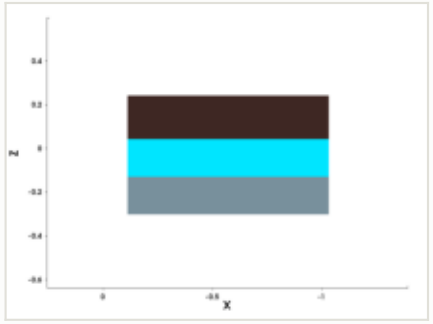

mask for this step

no mask for this step

steps by process area

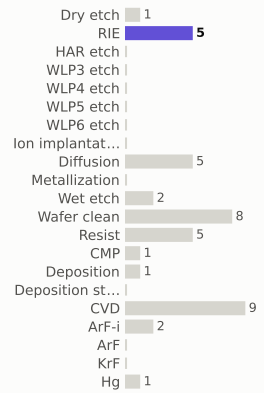

materials deposited (g)

gases emitted (g)

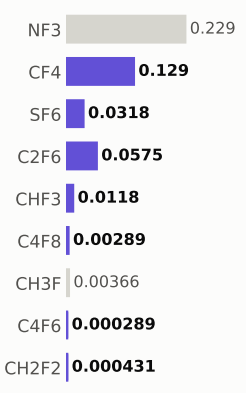

Step #610: CVD

depo_isotropic · CVD

1.31	53.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

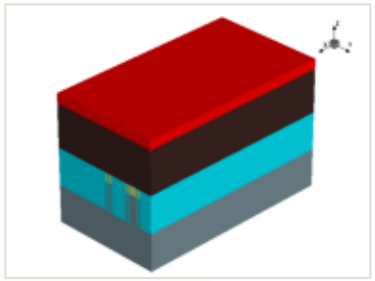

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.045 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy 19.4 of 815.7 (this step +0.656)

MPW materials 26.6 of 87 (this step +0.0317)

GPW gases 7.14 of 296.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

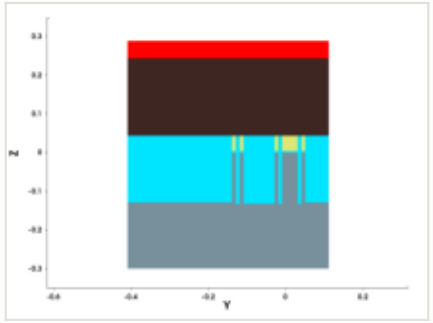

y cut at -0.150 µm

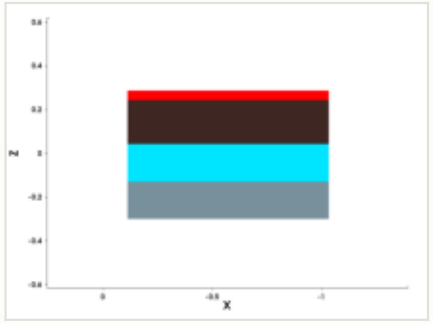

mask for this step

no mask for this step

steps by process area

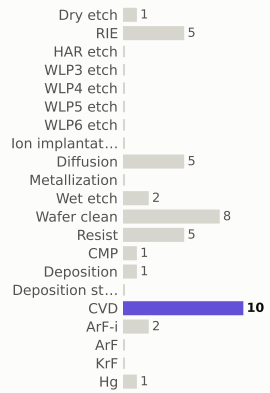

materials deposited (g)

gases emitted (g)

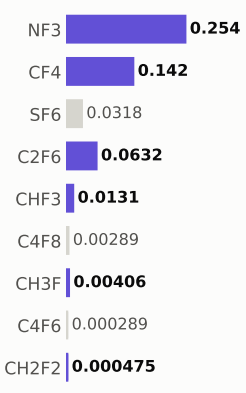

Step #620: Wafer_clean

clean · Wafer_clean

0.169	53.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

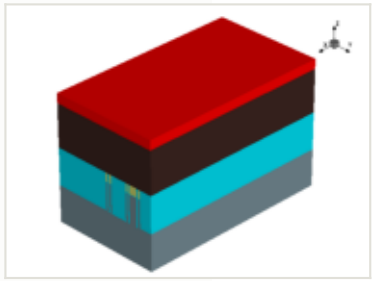

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

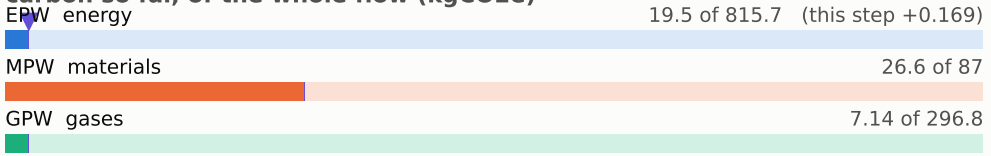

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

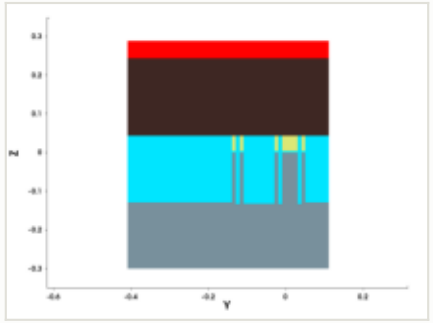

y cut at -0.150 µm

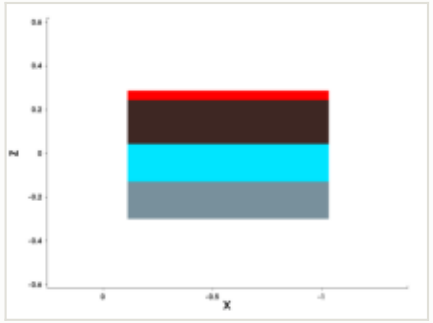

mask for this step

no mask for this step

steps by process area

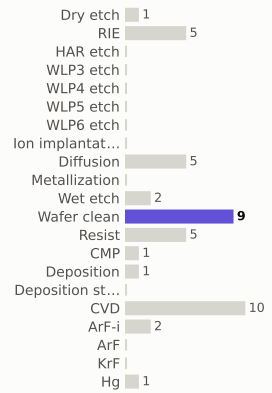

materials deposited (g)

gases emitted (g)

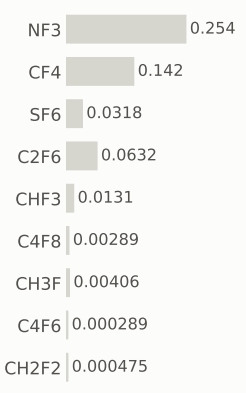

Step #630: Resist

resist · Resist

0.169	53.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

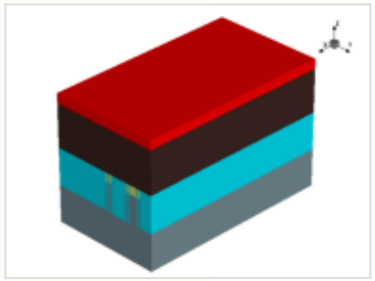

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

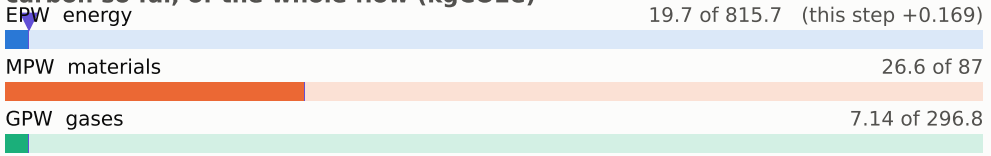

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

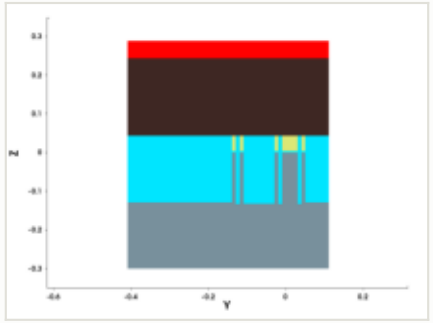

y cut at -0.150 µm

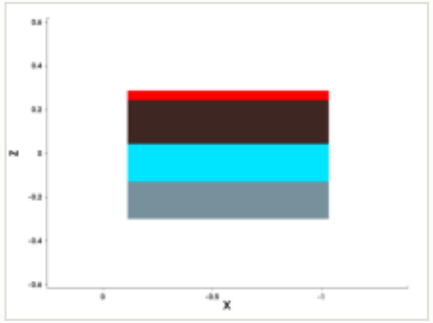

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

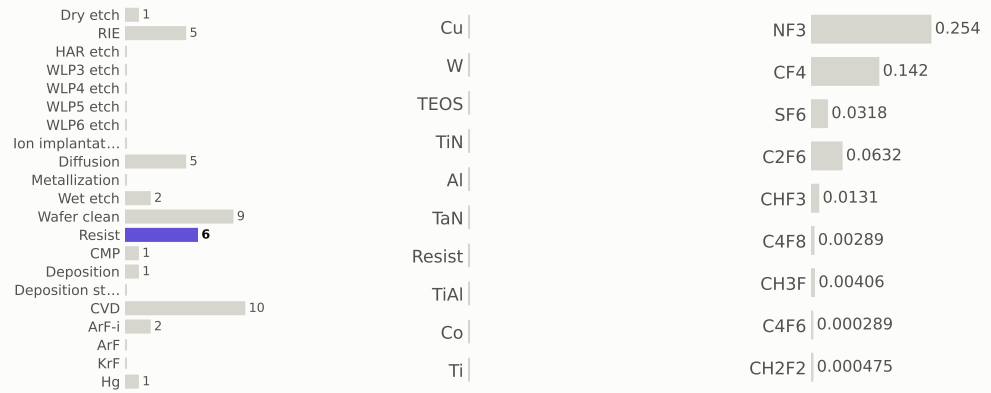

Step #640: ArF-i

litho_patterning · ArF-i

0.217	53.7	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

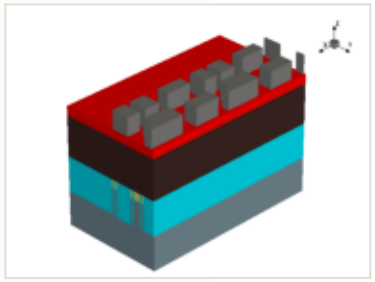

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

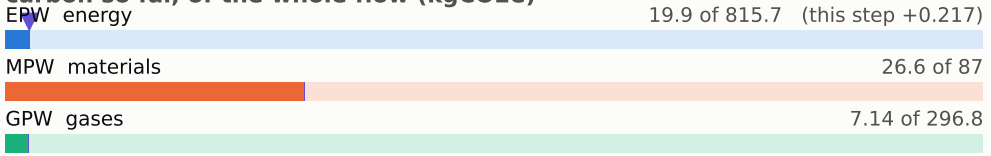

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

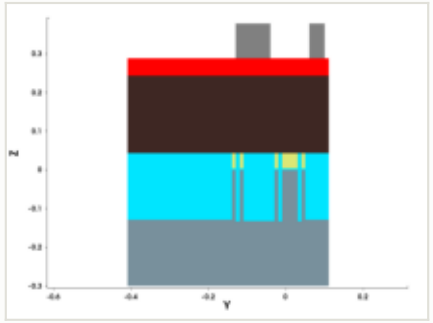

y cut at -0.150 µm

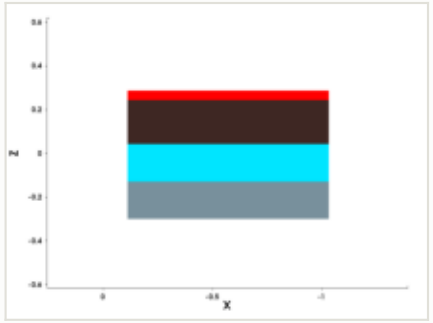

mask: layer 2011:0, positive (GDSII)

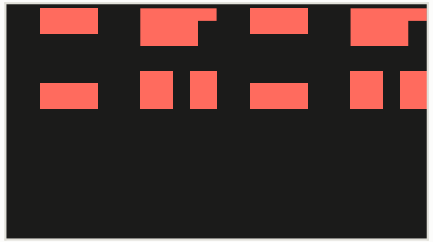

steps by process area

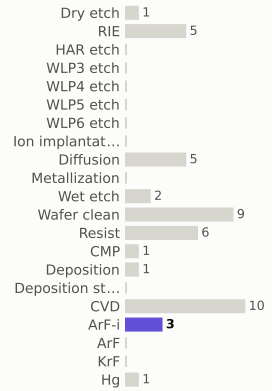

materials deposited (g)

gases emitted (g)

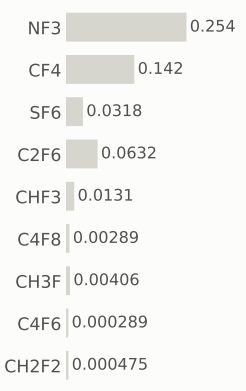

Step #650: RIE

etch_anisotropic · RIE

1.04	54.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

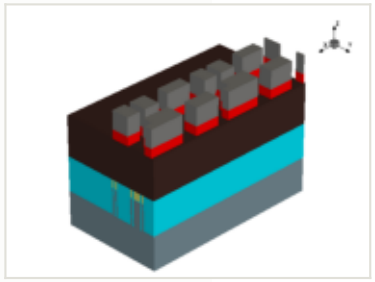

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

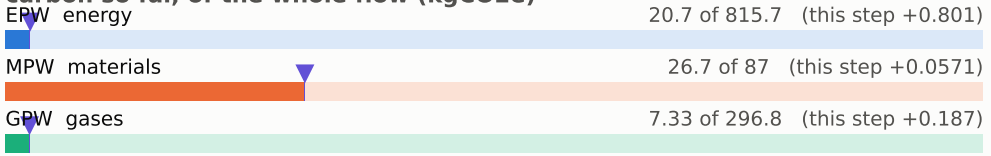

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

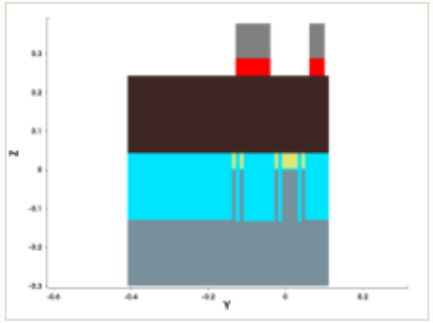

y cut at -0.150 µm

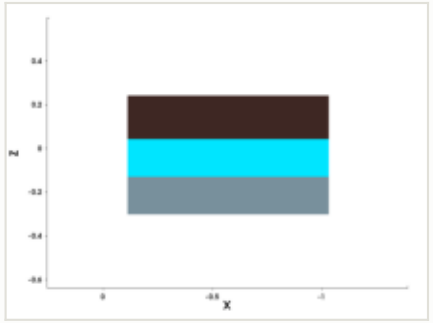

mask for this step

no mask for this step

steps by process area

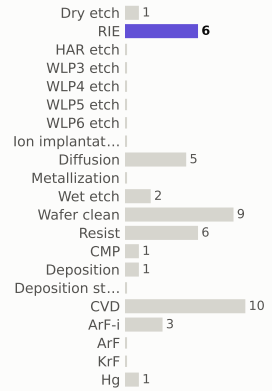

materials deposited (g)

gases emitted (g)

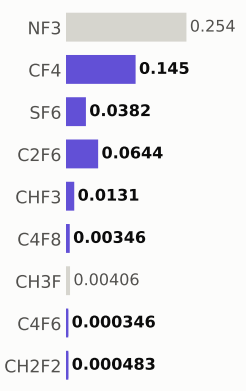

Step #660: Spx_only

etch_anisotropic · Spx_only

0	54.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

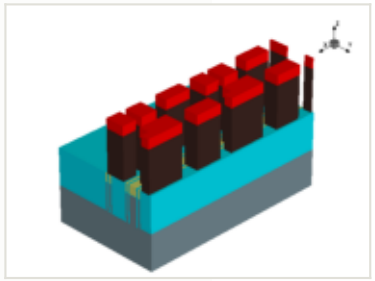

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

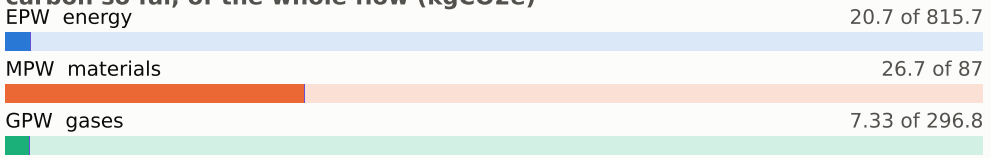

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

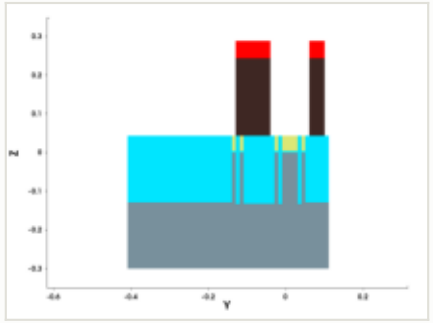

y cut at -0.150 µm

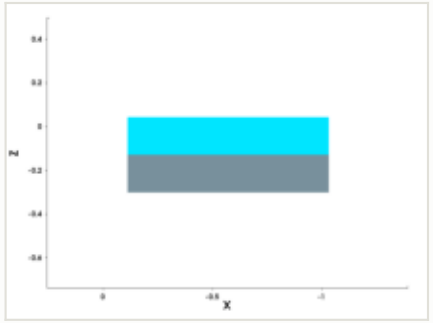

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

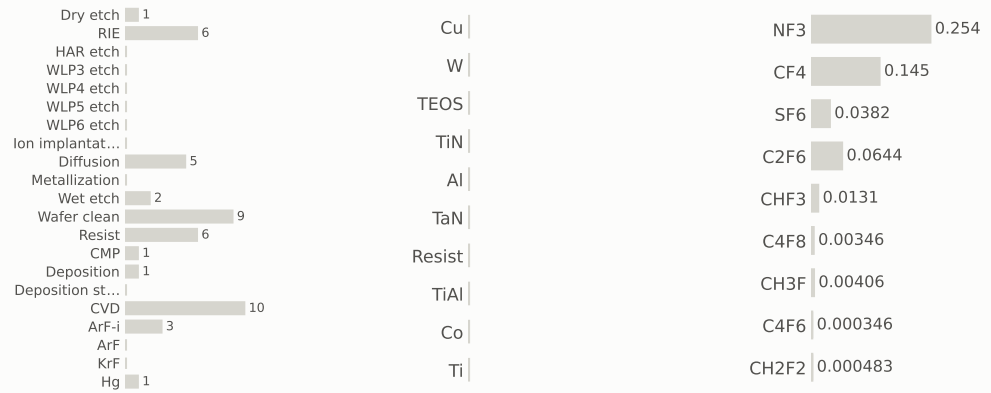

Step #670: Spx_only

etch_anisotropic · Spx_only

0	54.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

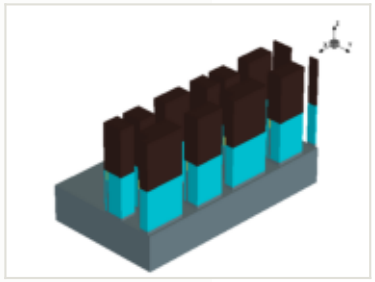

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

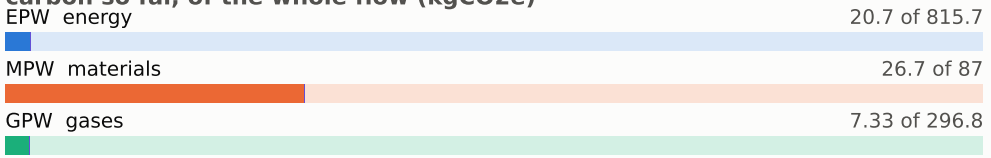

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

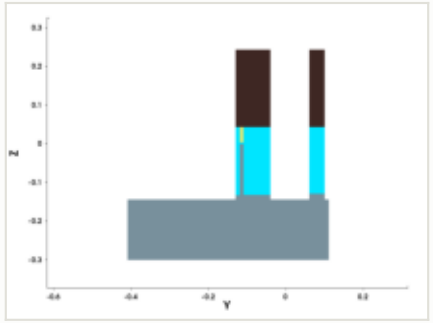

y cut at -0.150 µm

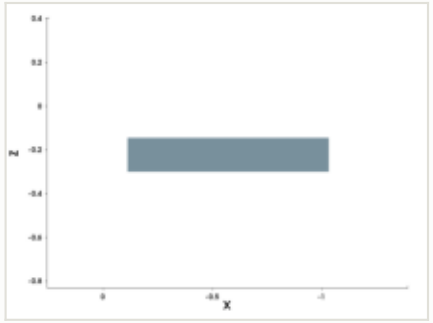

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

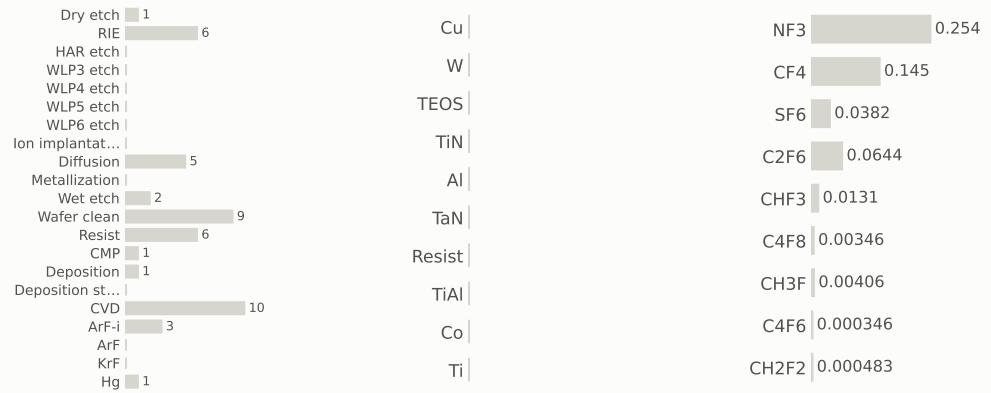

Step #680: Spx_only

etch_anisotropic · Spx_only

0	54.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

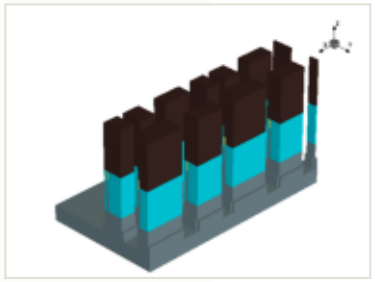

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

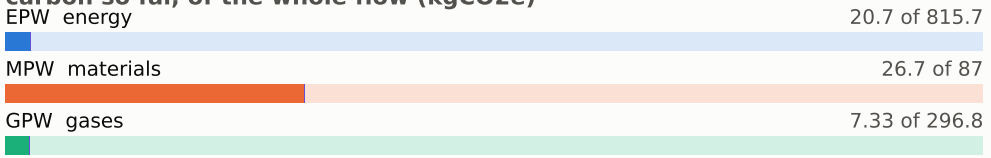

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

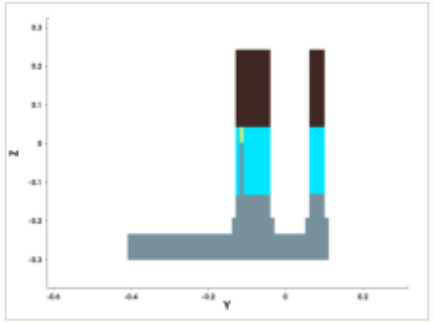

y cut at -0.150 µm

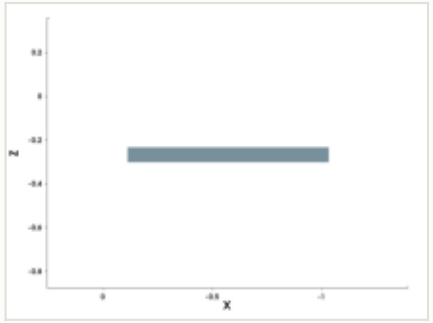

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

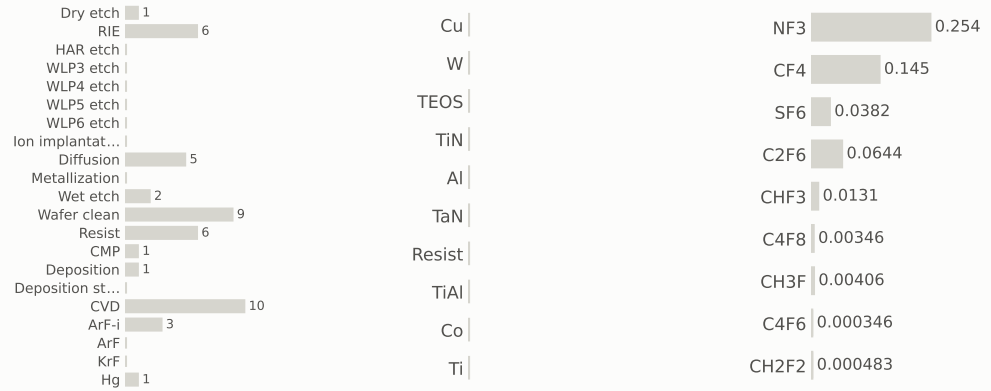

Step #690: Spx_only

etch_microloading · Spx_only

0	54.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

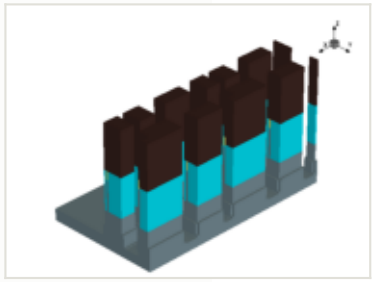

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

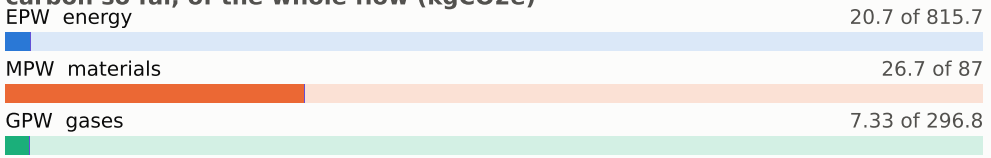

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

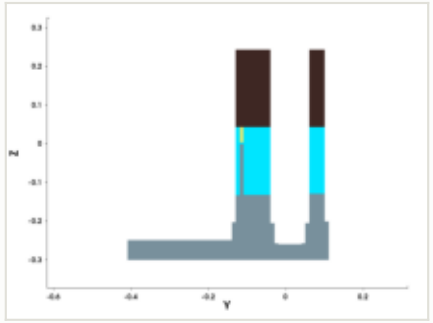

y cut at -0.150 µm

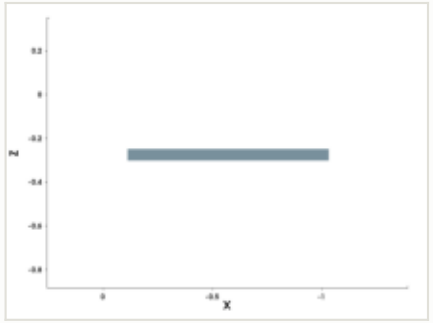

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

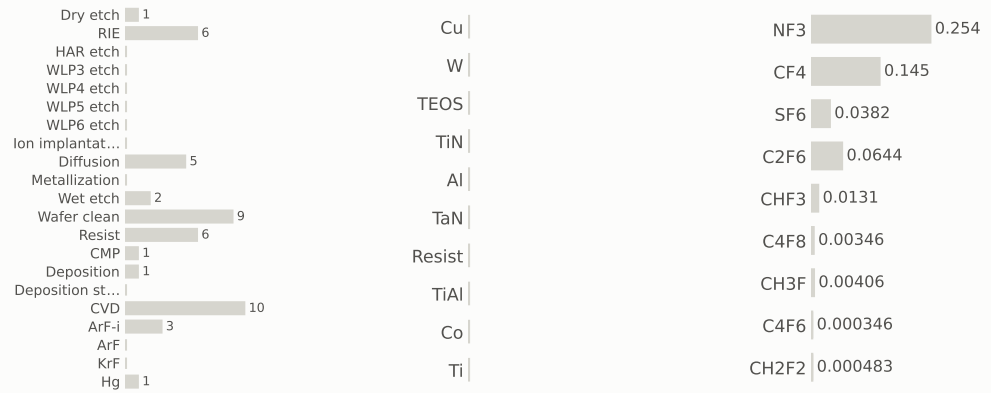

Step #700: Spx_only

etch_strip · Spx_only

0	54.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

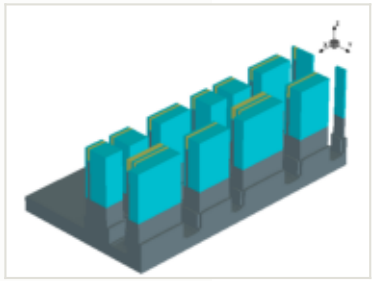

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

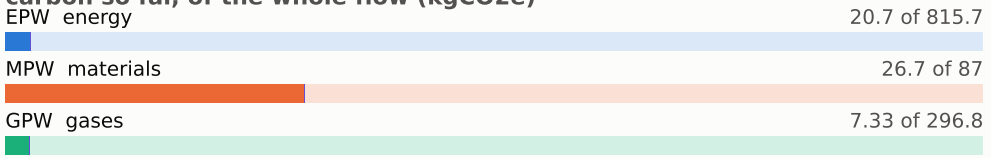

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

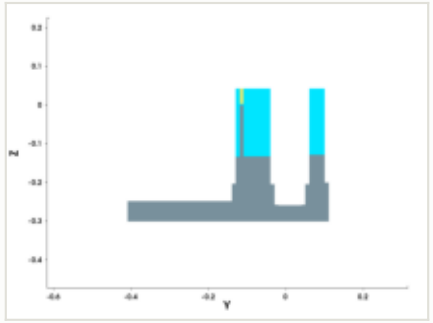

y cut at -0.150 µm

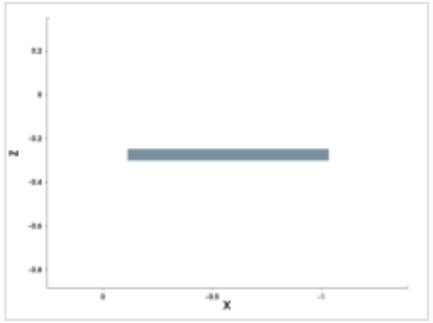

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

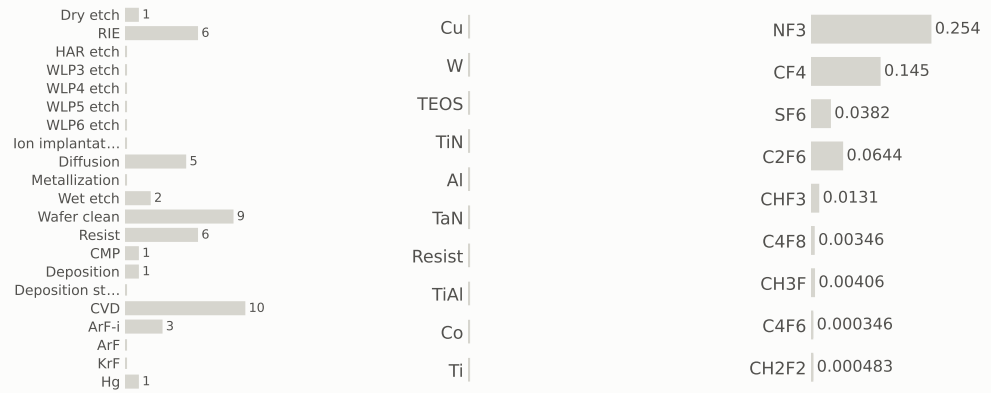

Step #710: Wafer_clean

clean · Wafer_clean

0.169	54.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

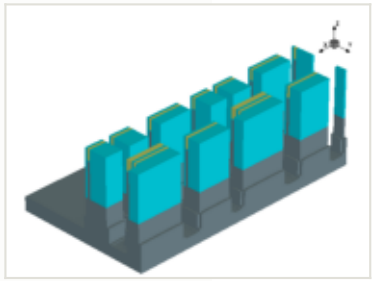

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

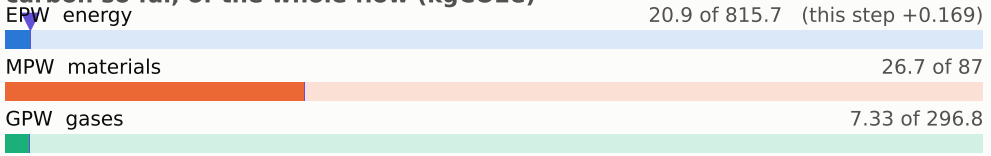

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

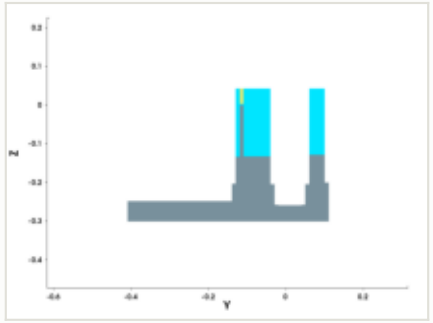

y cut at -0.150 µm

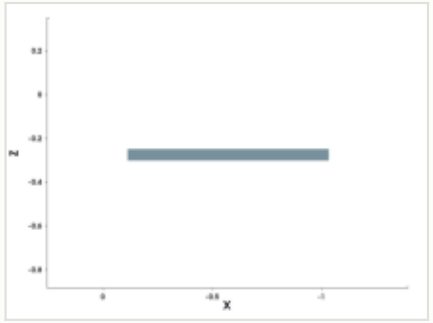

mask for this step

no mask for this step

steps by process area

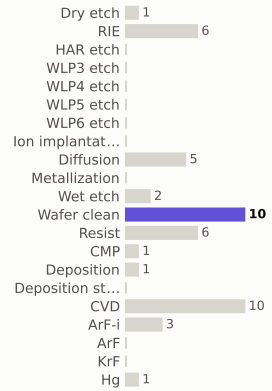

materials deposited (g)

gases emitted (g)

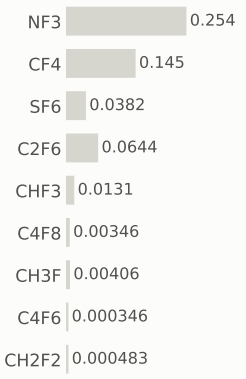

Step #720: Wafer_clean

clean · Wafer_clean

0.169	55	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

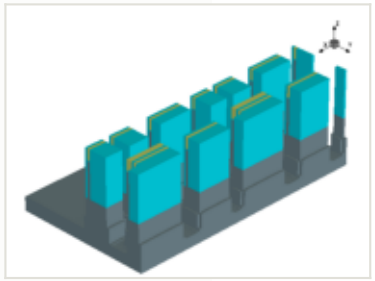

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

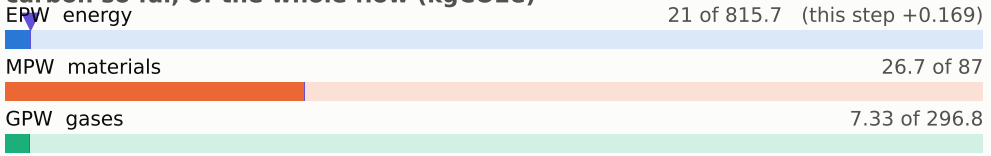

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

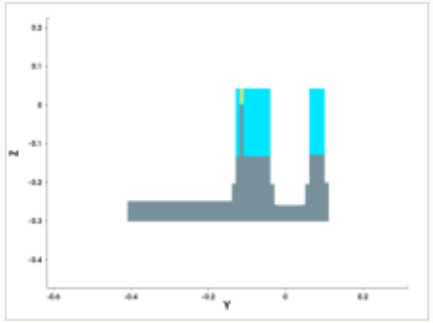

y cut at -0.150 µm

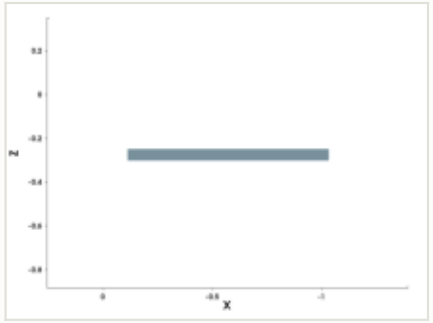

mask for this step

no mask for this step

steps by process area

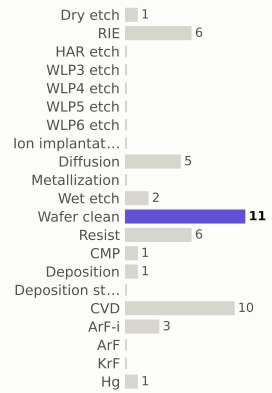

materials deposited (g)

gases emitted (g)

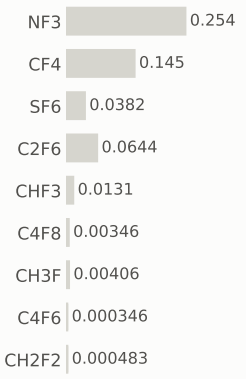

Step #730: CVD

depo_isotropic · CVD

1.31	56.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

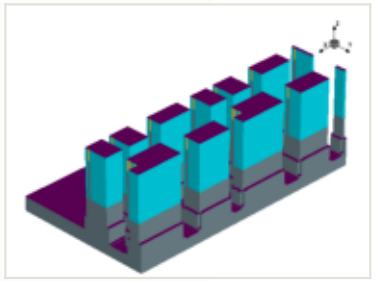

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.0015 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

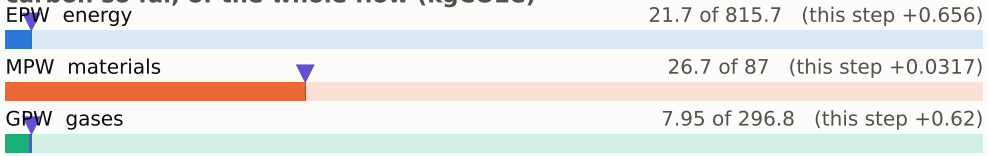

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

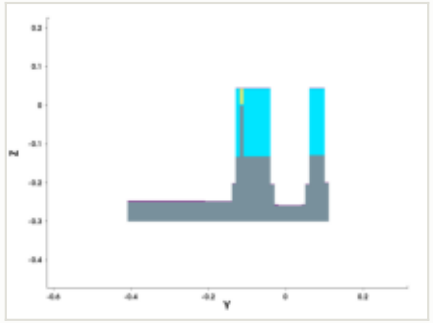

y cut at -0.150 µm

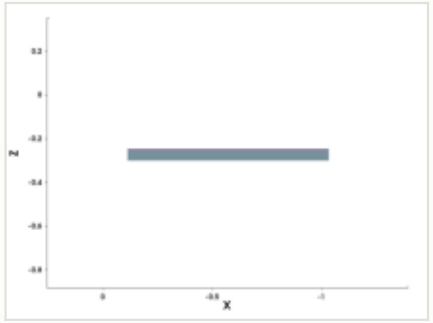

mask for this step

no mask for this step

steps by process area

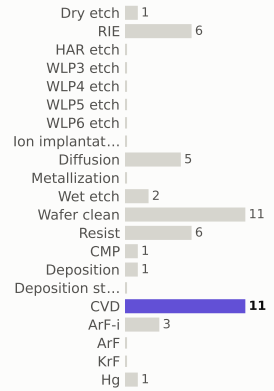

materials deposited (g)

gases emitted (g)



Step #740: Spx_only

etch_isotropic · Spx_only

0	56.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

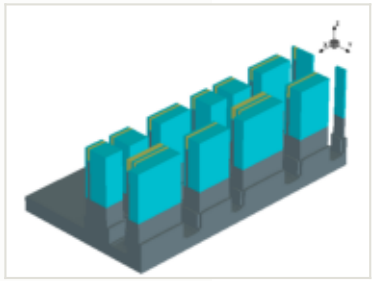

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

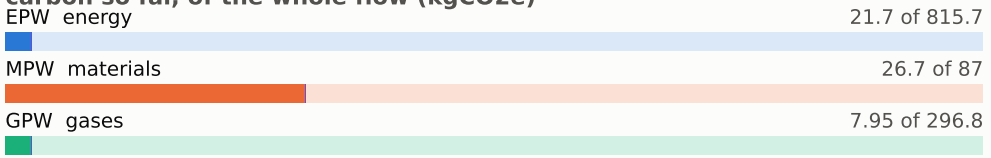

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

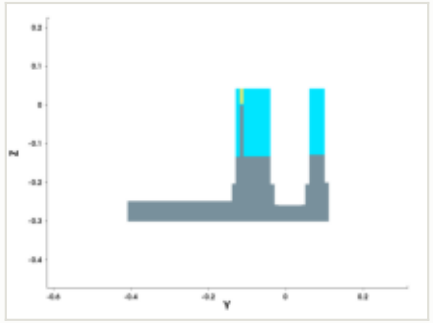

y cut at -0.150 µm

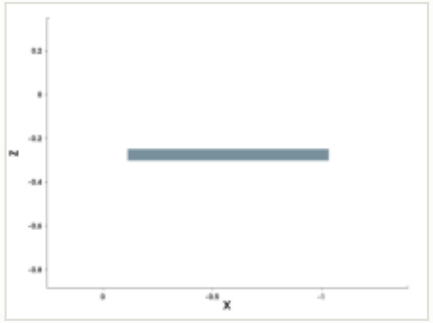

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

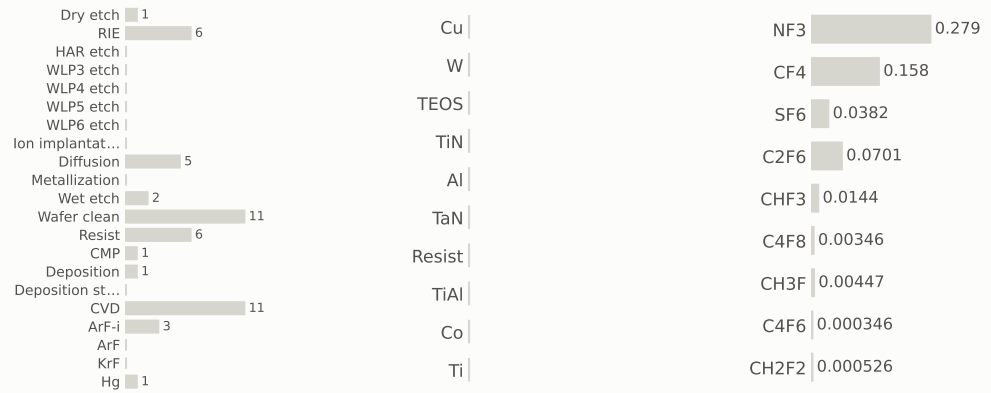

Step #750: Spx_only

depo_isotropic · Spx_only

0	56.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

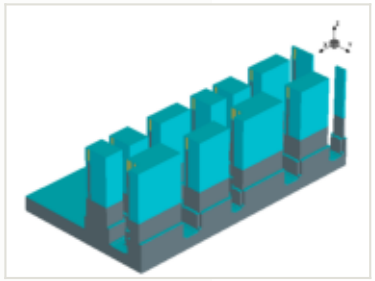

this step

process area	Spx_only
material	—
thickness	0.0015 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

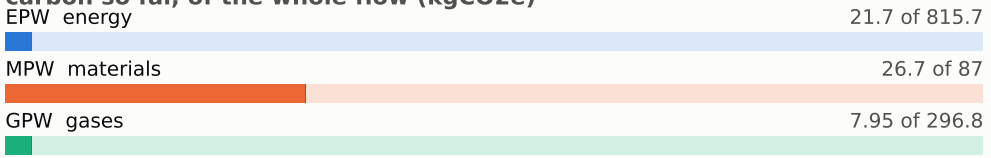

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

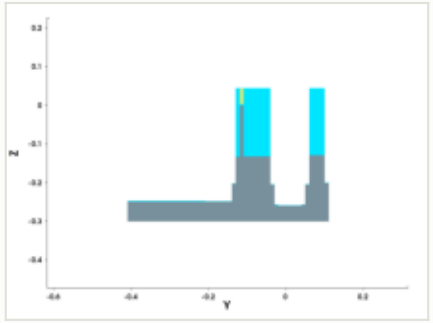

y cut at -0.150 µm

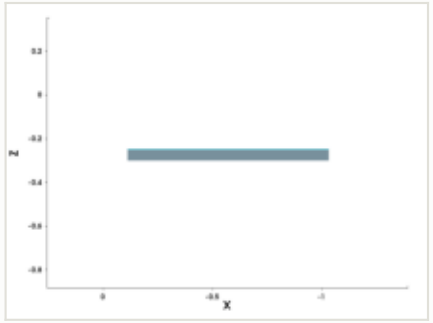

mask for this step

no mask for this step

steps by process area

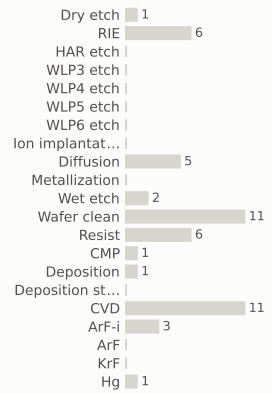

materials deposited (g)

gases emitted (g)

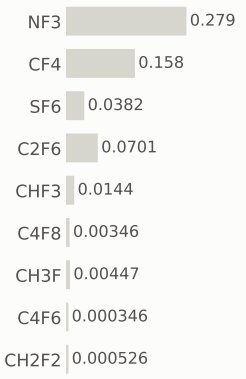

Step #760: CVD

depo_isotropic · CVD

1.31	57.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

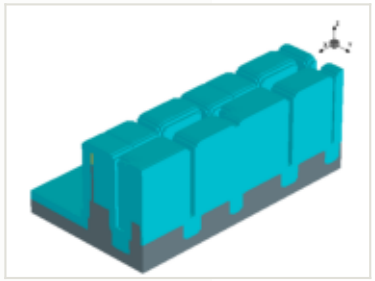

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

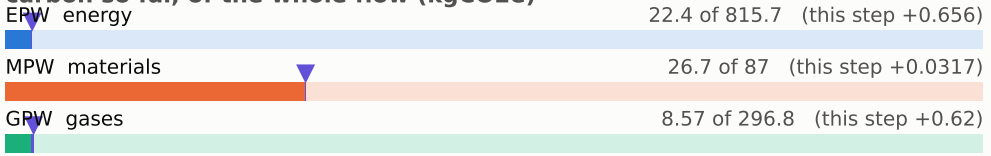

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

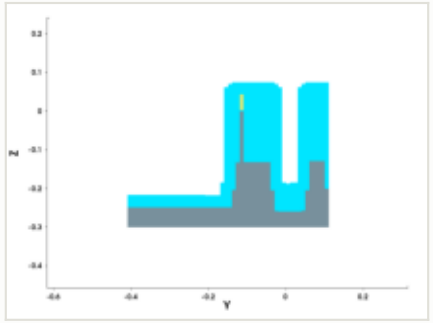

y cut at -0.150 µm

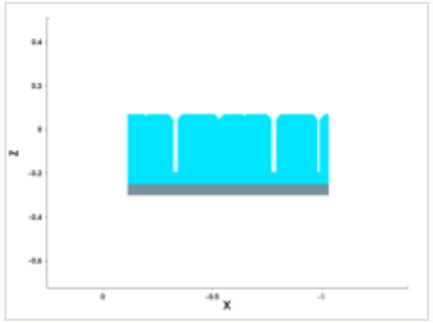

mask for this step

no mask for this step

steps by process area

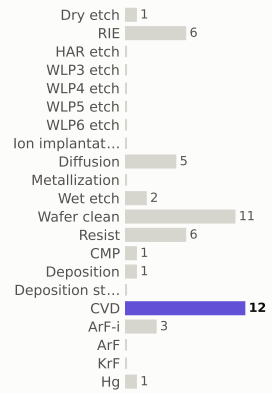

materials deposited (g)

gases emitted (g)

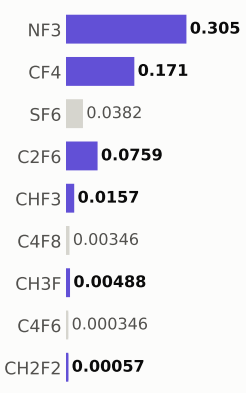

Step #770: RIE

etch_isotropic · RIE

1.04	58.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

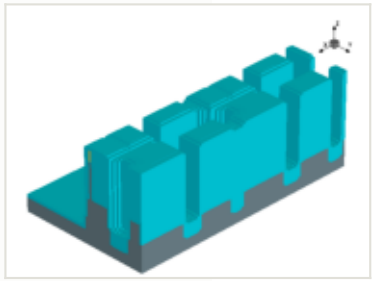

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

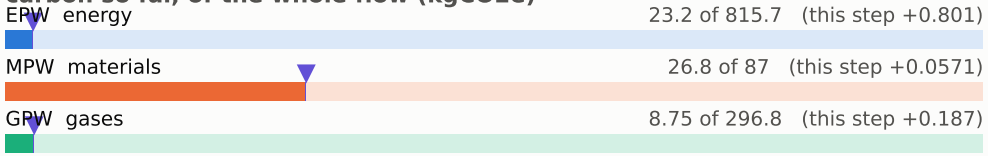

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

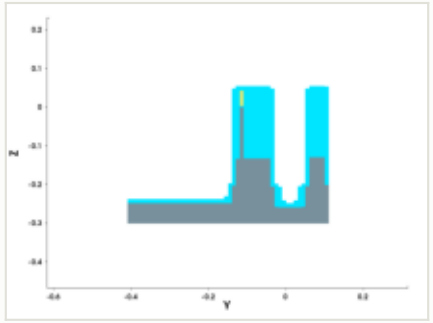

y cut at -0.150 µm

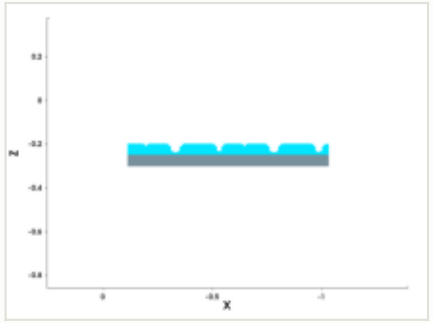

mask for this step

no mask for this step

steps by process area

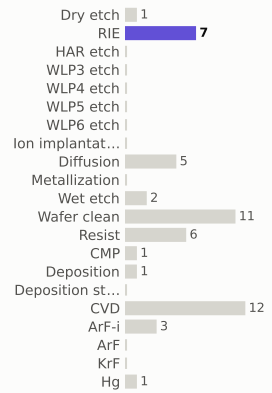

materials deposited (g)

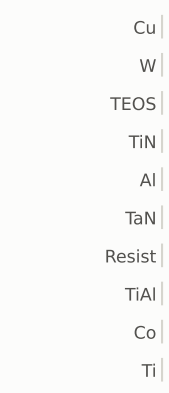

gases emitted (g)

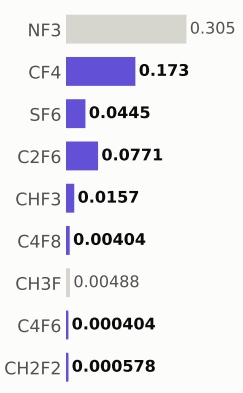

Step #780: Wafer_clean

clean · Wafer_clean

0.169	58.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

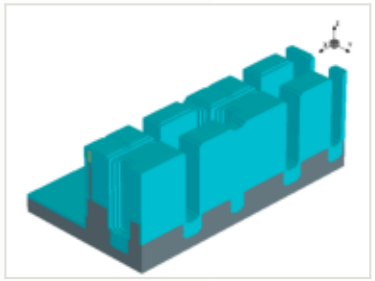

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

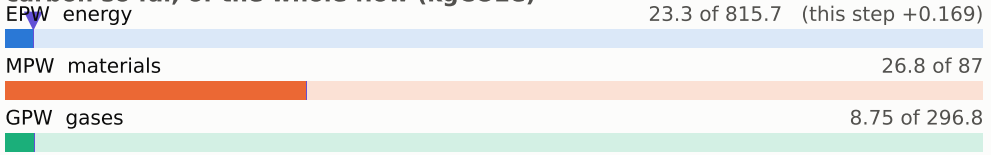

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

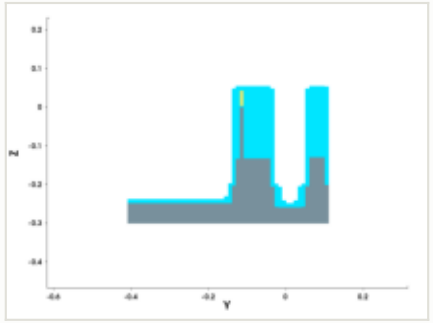

y cut at -0.150 µm

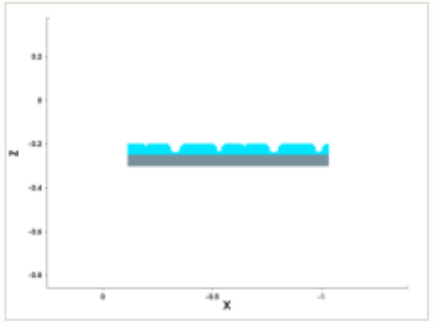

mask for this step

no mask for this step

steps by process area

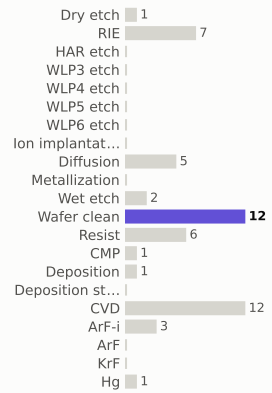

materials deposited (g)

gases emitted (g)

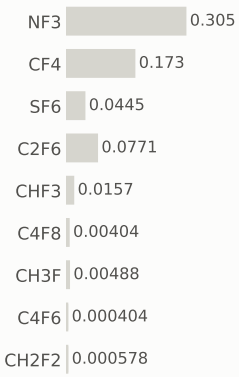

Step #790: CVD

depo_fill · CVD

1.31	60.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

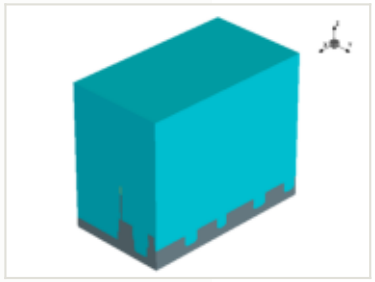

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.4 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

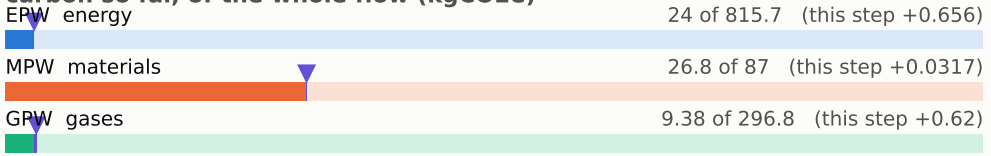

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

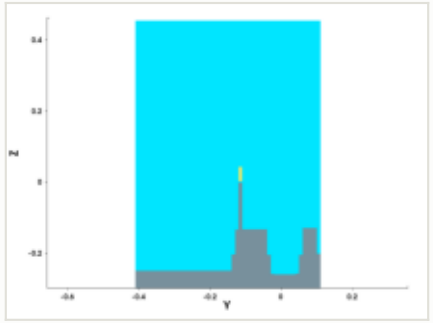

y cut at -0.150 µm

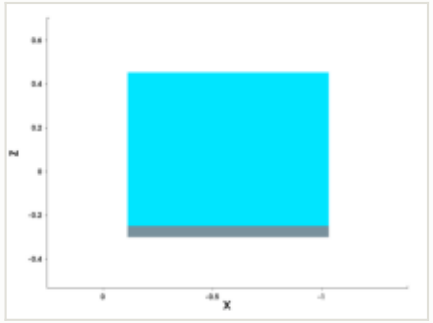

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

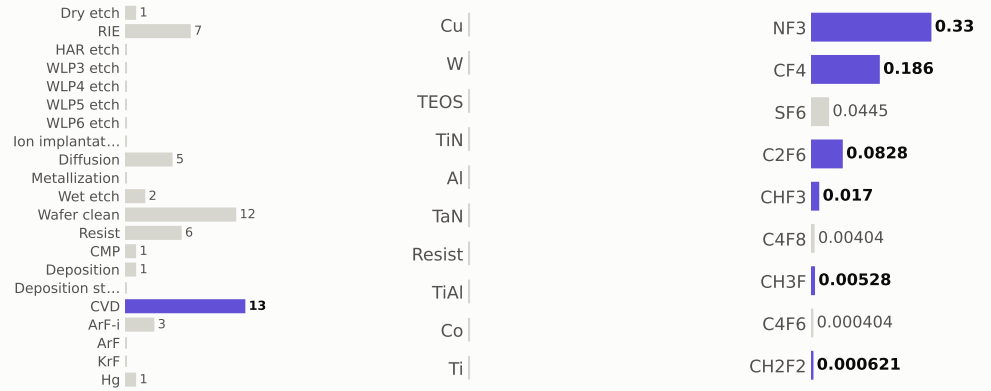

Step #800: Wafer_clean

clean · Wafer_clean

0.169	60.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

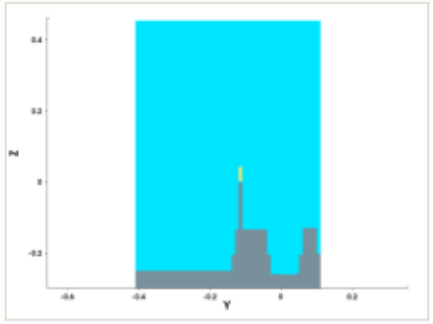

y cut at -0.150 µm

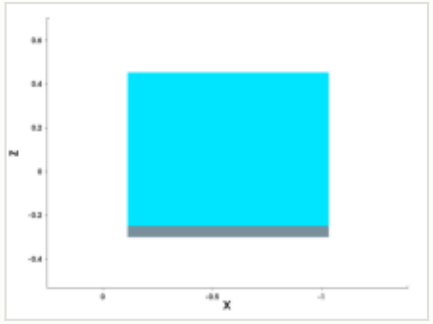

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

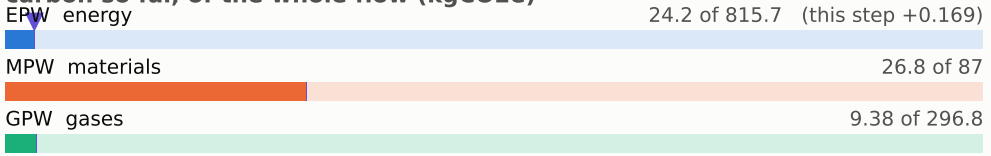

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

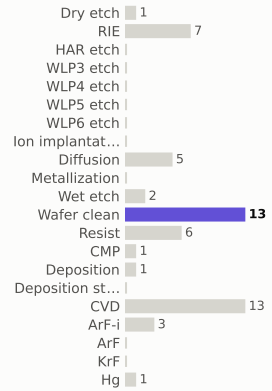

materials deposited (g)

gases emitted (g)

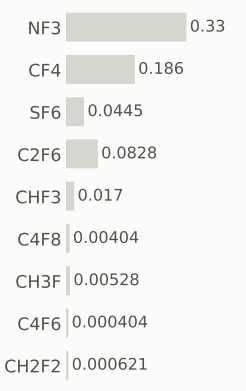

Step #810: Diffusion

anneal · Diffusion

0.801	61.1	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

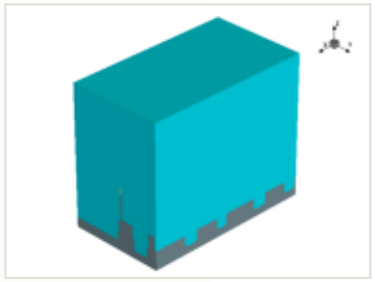

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

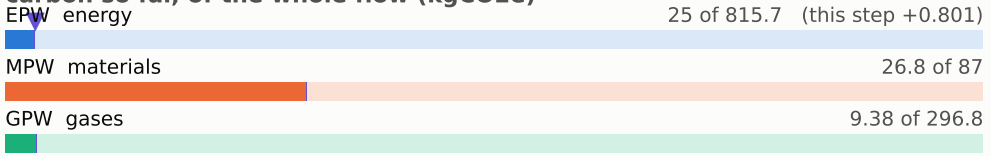

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

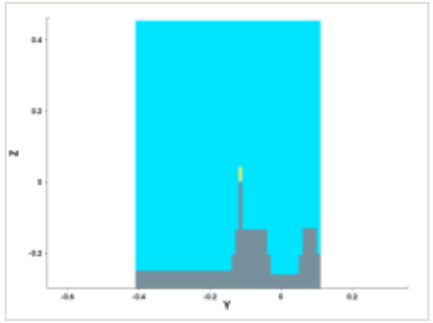

y cut at -0.150 µm

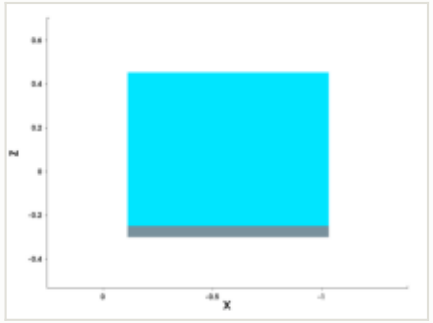

mask for this step

no mask for this step

steps by process area

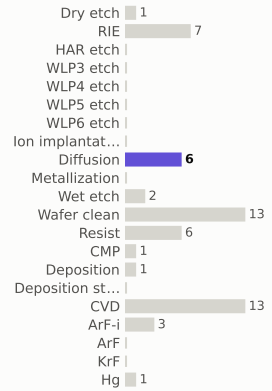

materials deposited (g)

gases emitted (g)

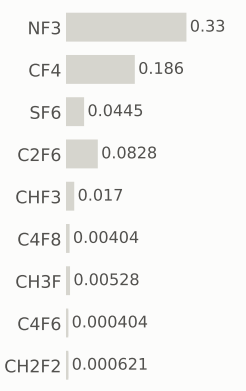

Step #820: CVD

depo_isotropic · CVD

1.31	62.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.25 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

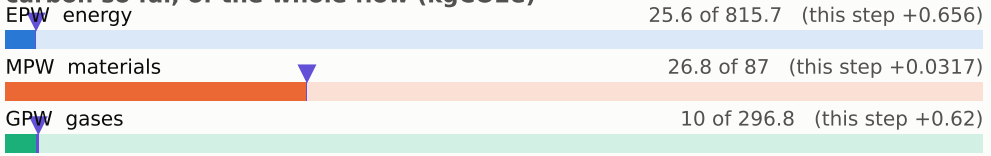

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

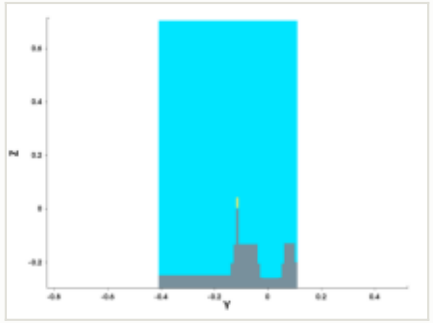

y cut at -0.150 µm

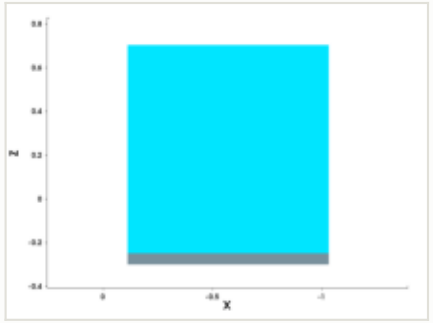

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

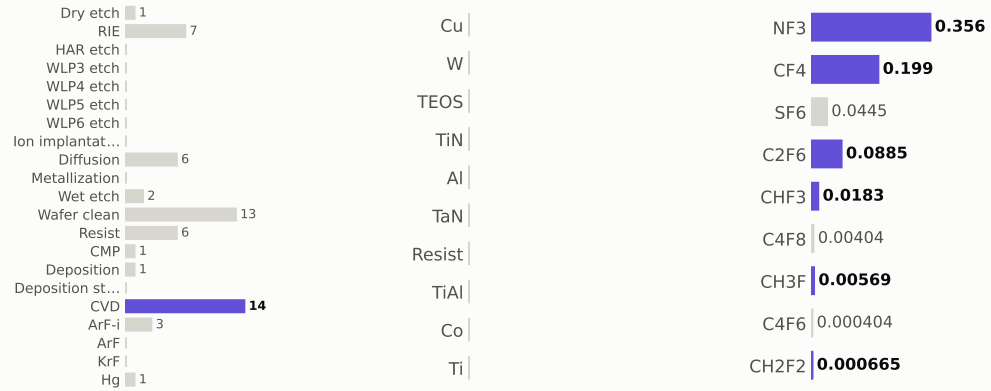

Step #830: CMP

etch_cmp · CMP

0.169	62.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

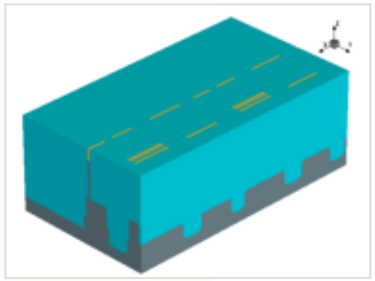

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

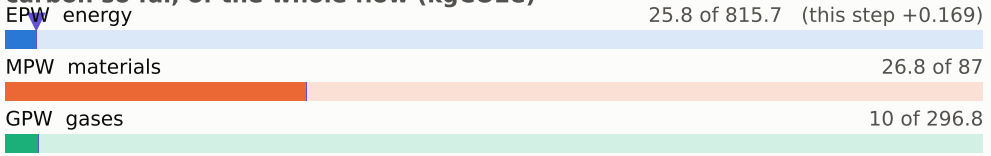

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

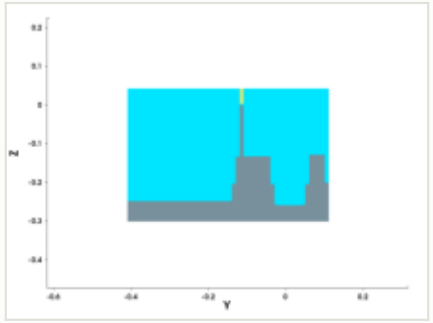

y cut at -0.150 µm

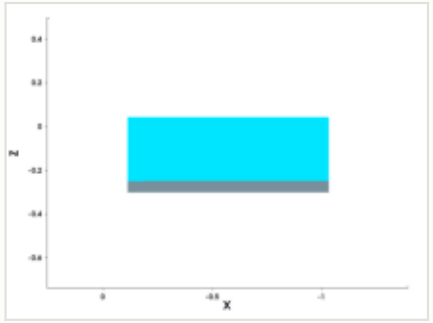

mask for this step

no mask for this step

steps by process area

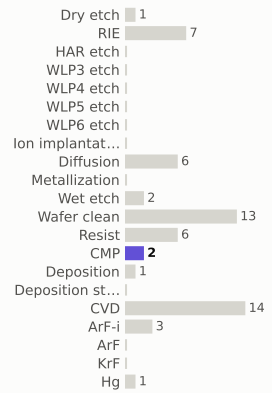

materials deposited (g)

gases emitted (g)

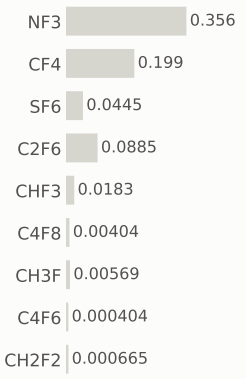

Step #840: Wafer_clean

clean · Wafer_clean

0.169	62.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

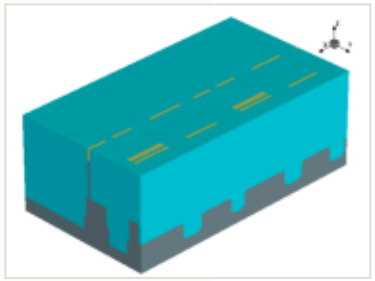

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

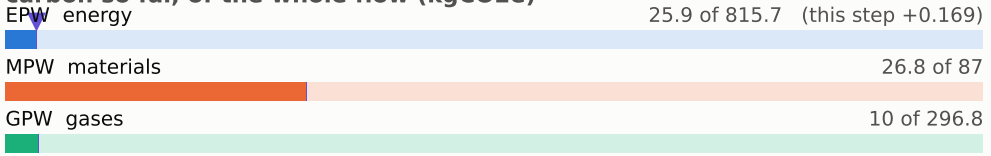

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

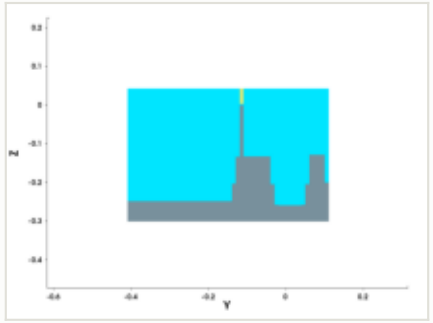

y cut at -0.150 µm

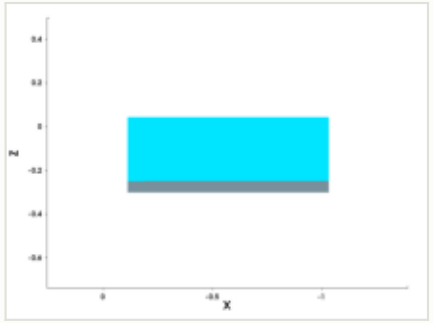

mask for this step

no mask for this step

steps by process area

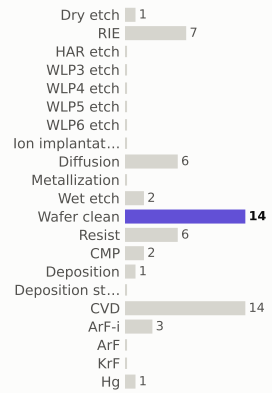

materials deposited (g)

gases emitted (g)

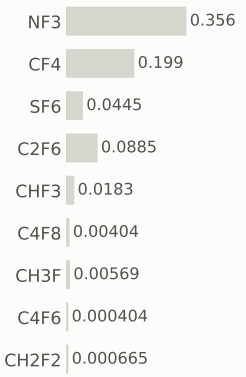

Step #850: Diffusion

anneal · Diffusion

0.801	63.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

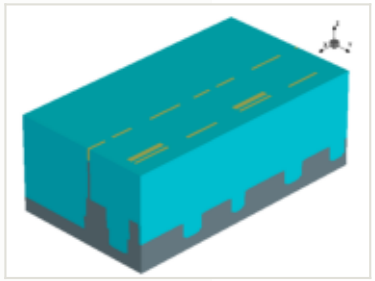

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

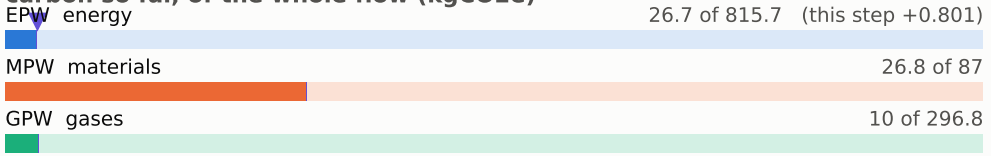

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

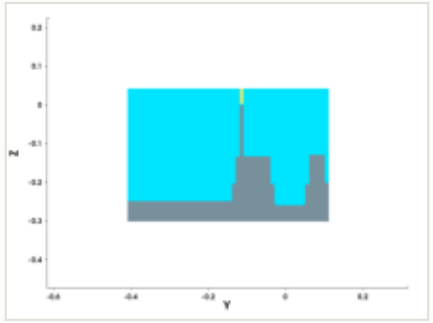

y cut at -0.150 µm

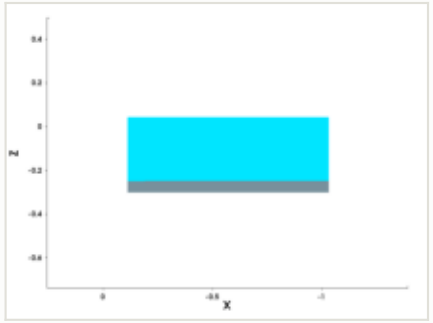

mask for this step

no mask for this step

steps by process area

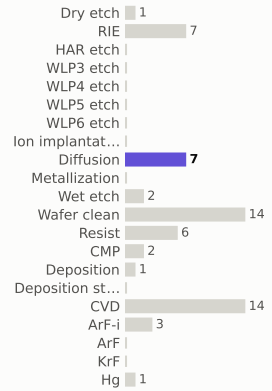

materials deposited (g)

gases emitted (g)

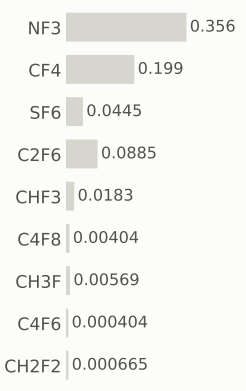

Step #860: RIE

etch_anisotropic · RIE

1.04	64.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

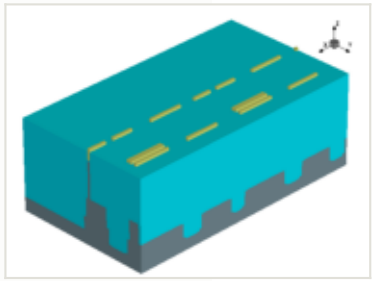

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

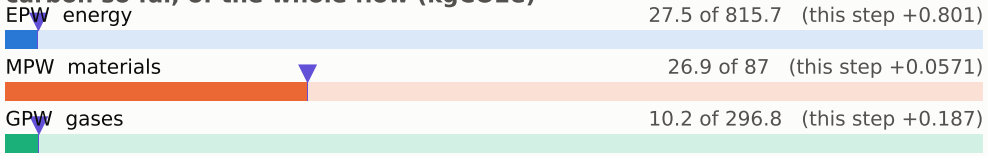

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

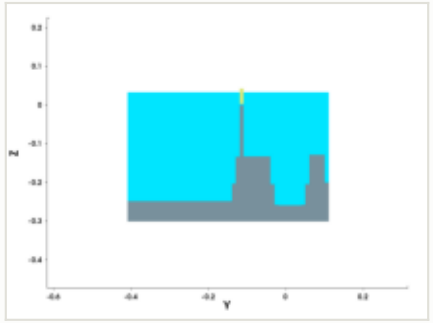

y cut at -0.150 µm

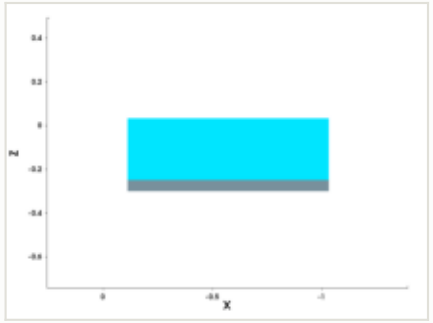

mask for this step

no mask for this step

steps by process area

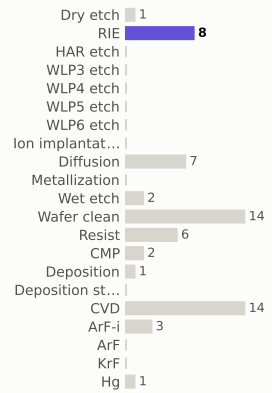

materials deposited (g)

gases emitted (g)

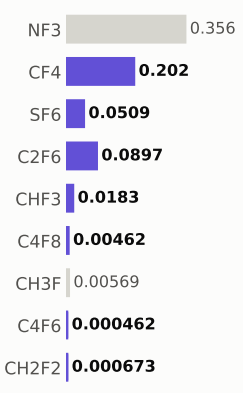

Step #870: Dry_etch

etch_strip · Dry_etch

0.801	65.4	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

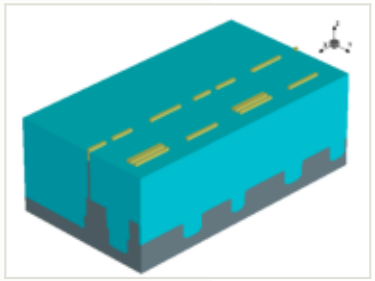

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

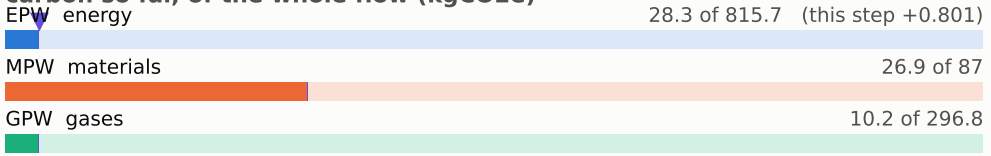

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

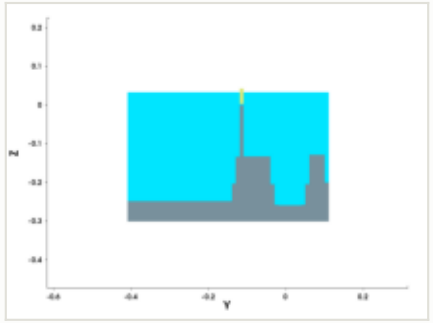

y cut at -0.150 µm

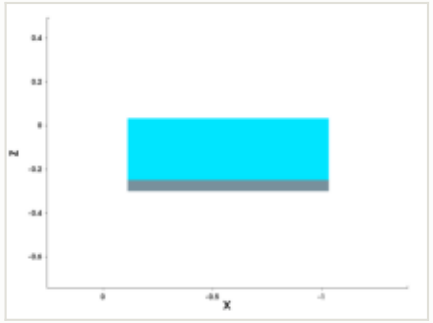

mask for this step

no mask for this step

steps by process area

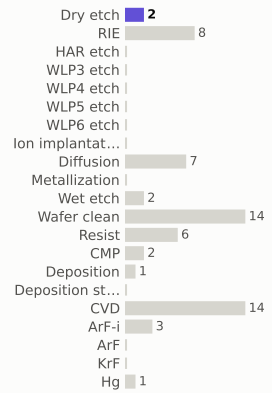

materials deposited (g)

gases emitted (g)

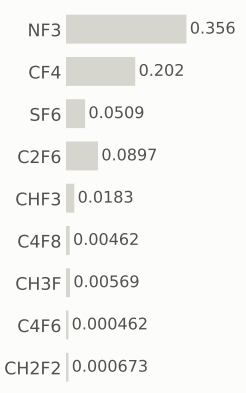

Step #880: Wafer_clean

clean · Wafer_clean

0.169	65.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

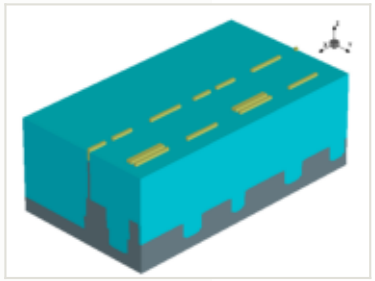

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

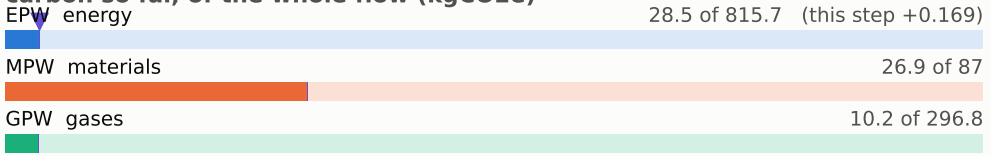

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

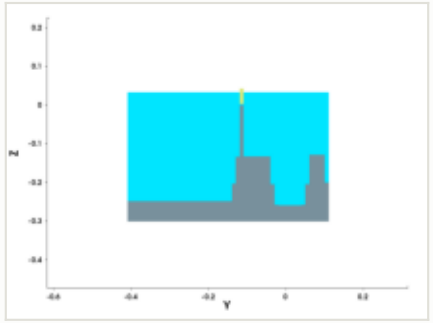

y cut at -0.150 µm

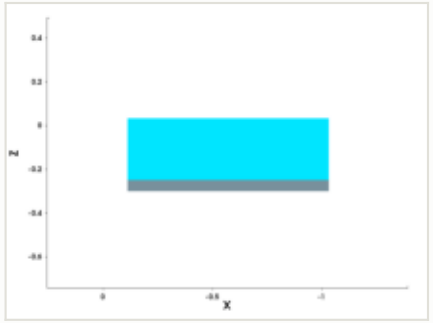

mask for this step

no mask for this step

steps by process area

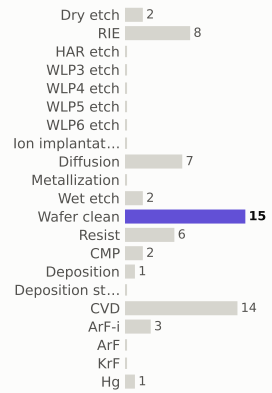

materials deposited (g)

gases emitted (g)

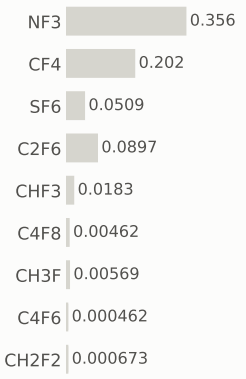

Step #890: Wet_etch

etch_isotropic · Wet_etch

0.169	65.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

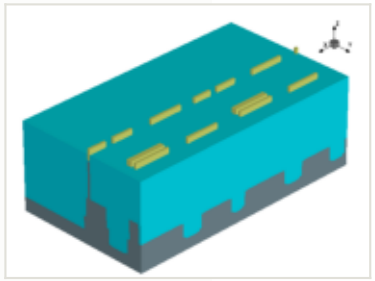

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

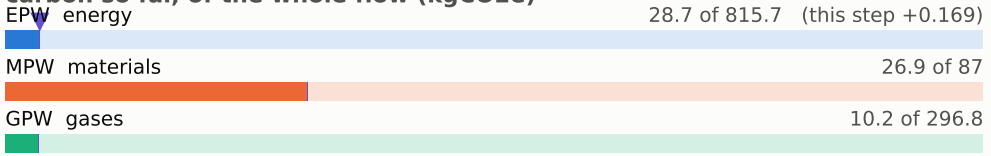

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

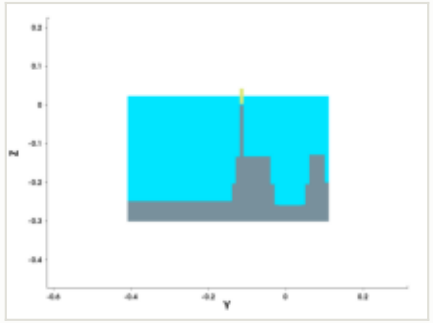

y cut at -0.150 µm

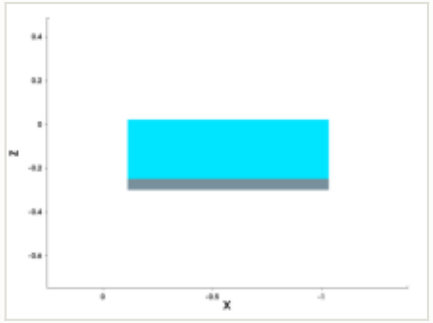

mask for this step

no mask for this step

steps by process area

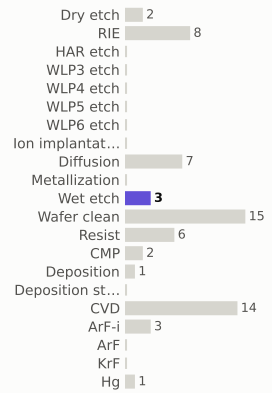

materials deposited (g)

gases emitted (g)

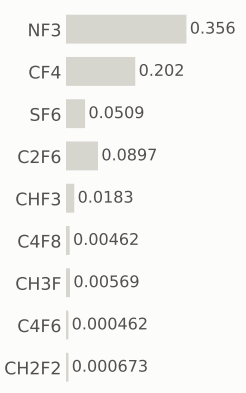

Step #900: Wet_etch

etch_microloading · Wet_etch

0.169	65.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

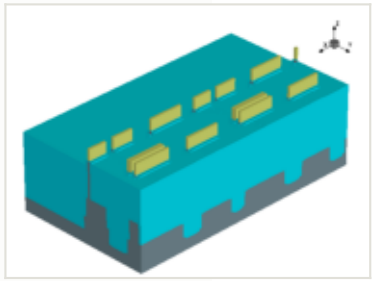

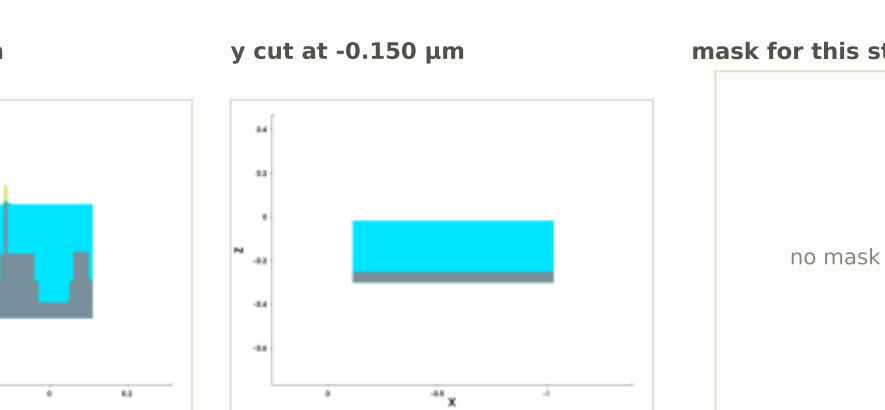

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

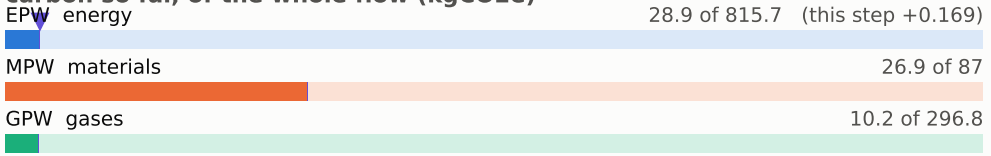

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

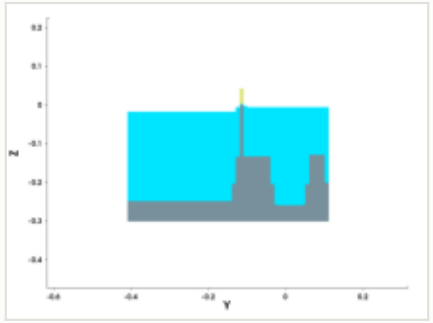

y cut at -0.150 µm

mask for this step

no mask for this step

steps by process area

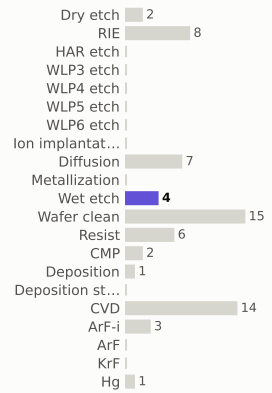

materials deposited (g)

gases emitted (g)

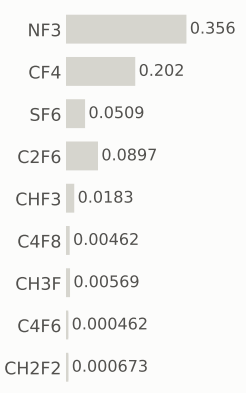

Step #910: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	66.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

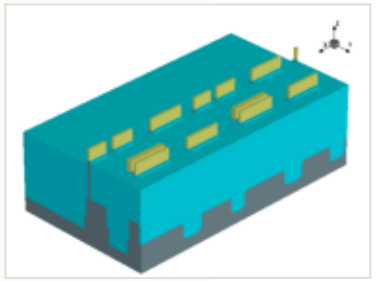

x cut at -0.570 µm

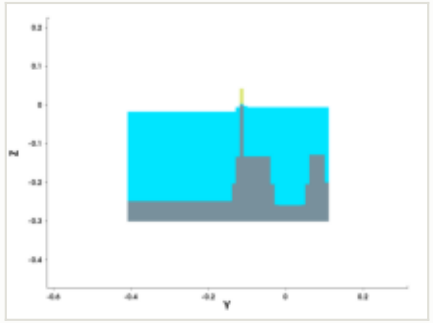

y cut at -0.150 µm

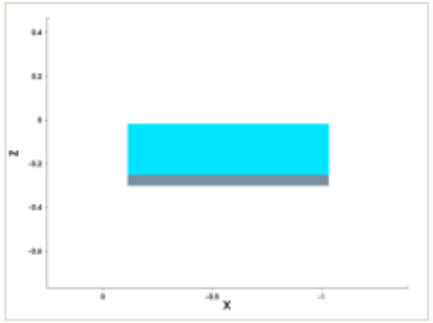

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

EPW energy 29.7 of 815.7 (this step +0.801)

MPW materials 26.9 of 87

GPW gases 10.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

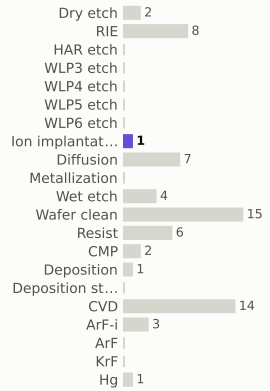

materials deposited (g)

gases emitted (g)

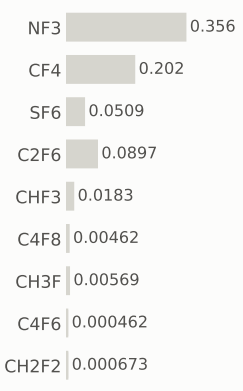

Step #920: Wafer_clean

clean · Wafer_clean

0.169	66.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

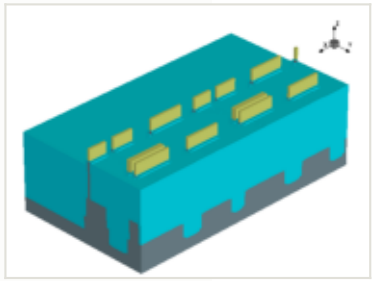

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

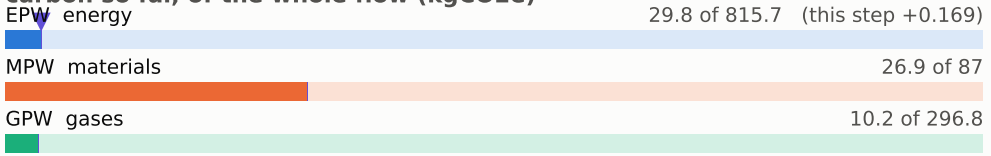

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

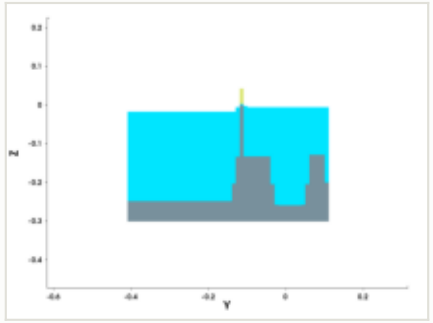

y cut at -0.150 µm

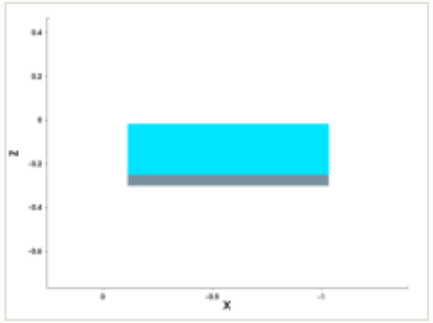

mask for this step

no mask for this step

steps by process area

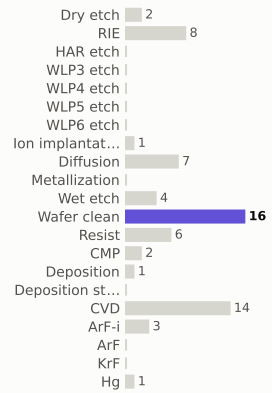

materials deposited (g)

gases emitted (g)

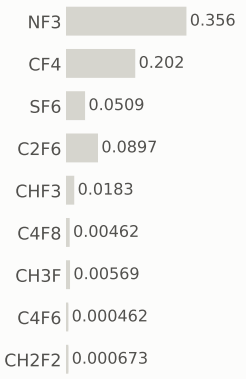

Step #930: Resist

resist · Resist

0.169	67.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

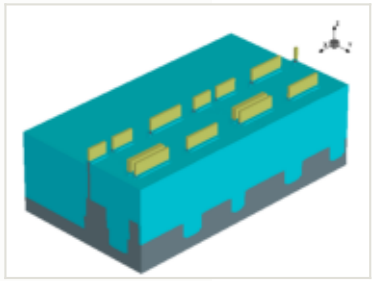

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

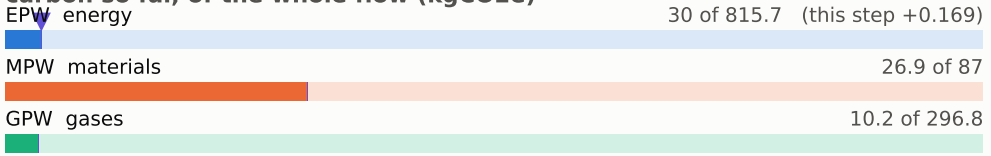

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

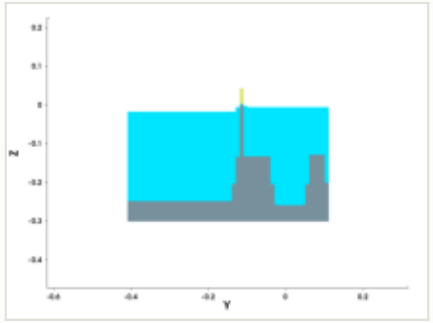

y cut at -0.150 µm

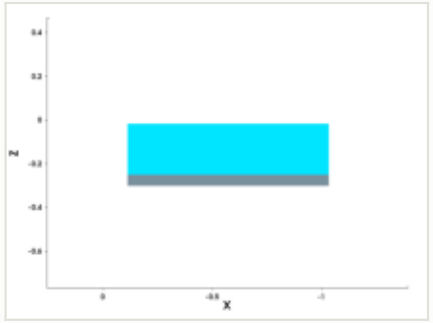

mask for this step

no mask for this step

steps by process area

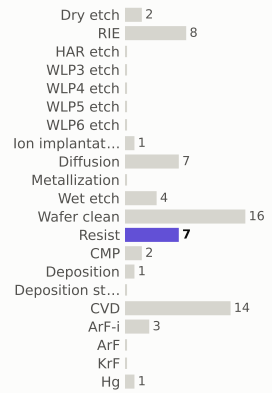

materials deposited (g)

gases emitted (g)

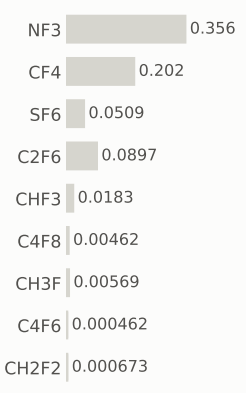

Step #940: KrF

litho_patterning · KrF

0.199	67.3	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

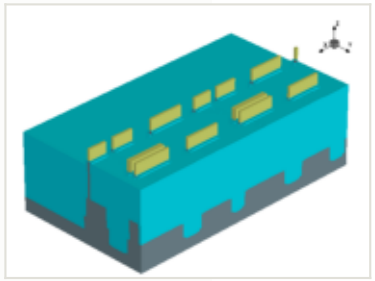

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

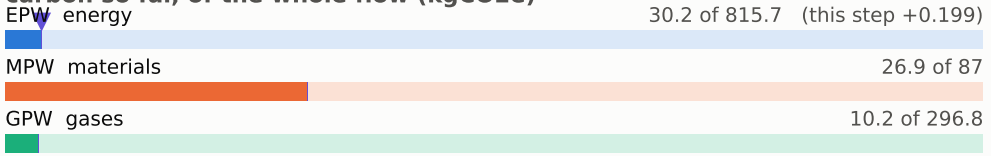

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

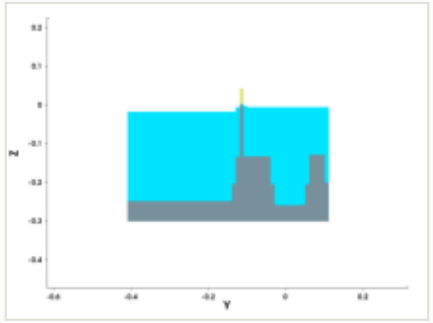

y cut at -0.150 µm

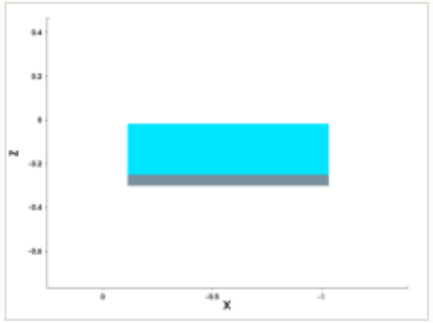

mask: layer 2100:0, positive (GDSII)

steps by process area

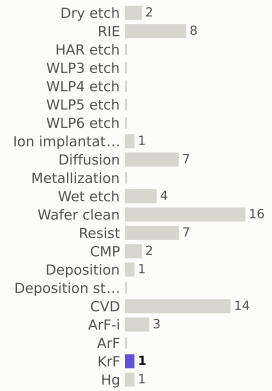

materials deposited (g)

gases emitted (g)

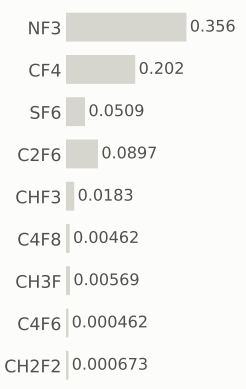

Step #950: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	68.1	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

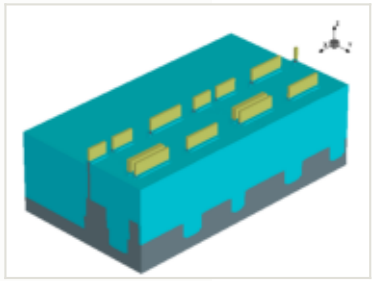

x cut at -0.570 µm

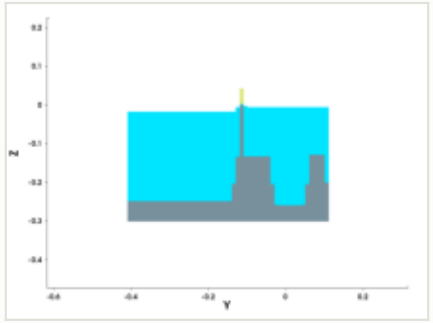

y cut at -0.150 µm

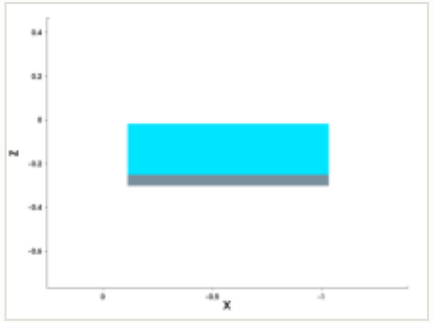

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

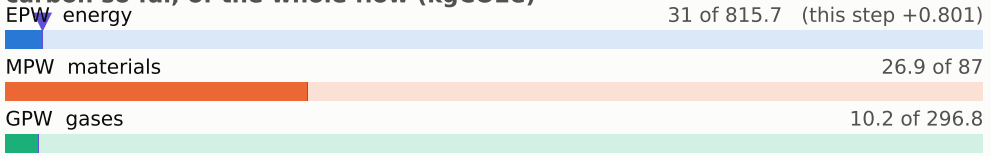

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

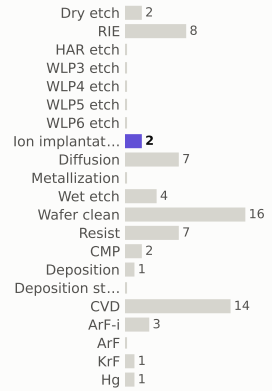

materials deposited (g)

gases emitted (g)

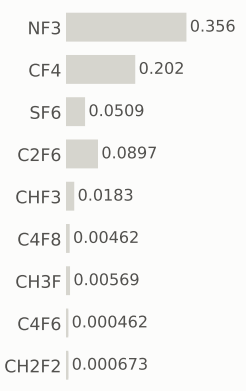

Step #960: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	68.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

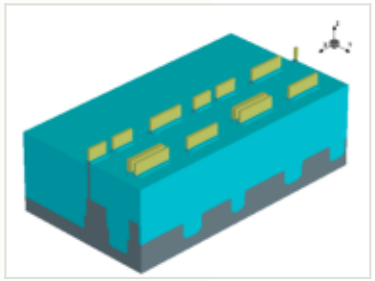

x cut at -0.570 µm

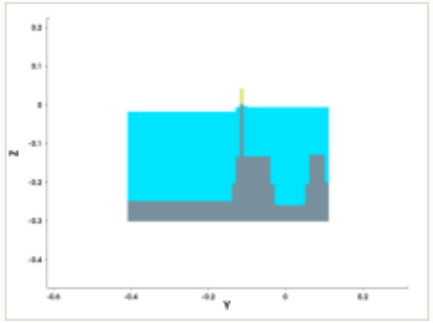

y cut at -0.150 µm

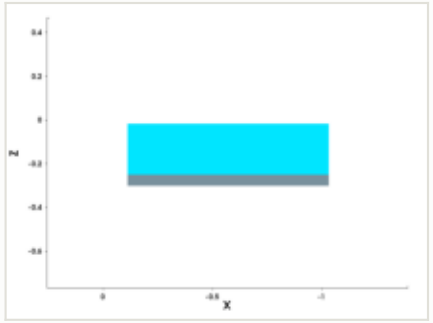

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

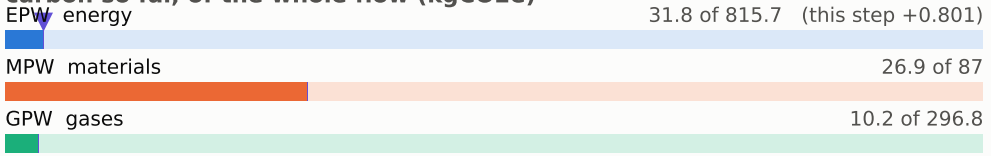

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

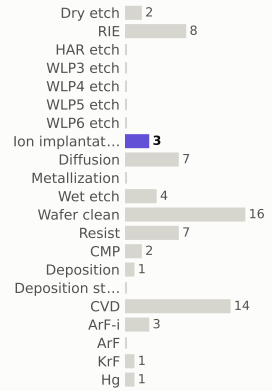

materials deposited (g)

gases emitted (g)

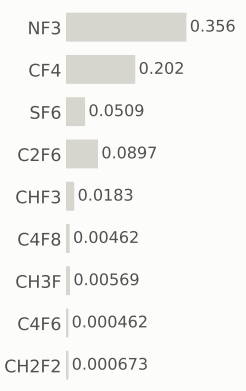

Step #970: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	69.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

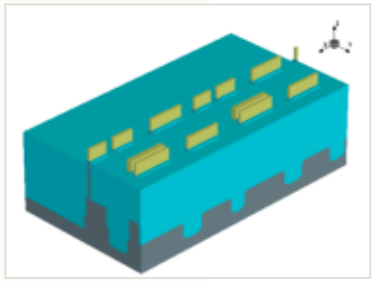

x cut at -0.570 µm

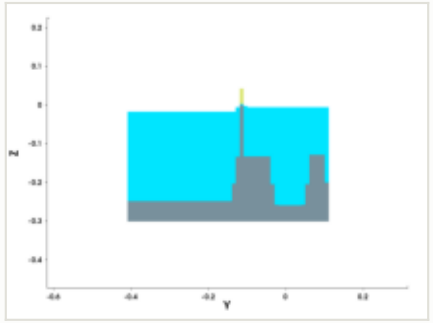

y cut at -0.150 µm

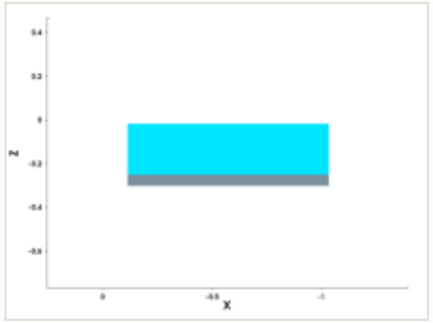

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

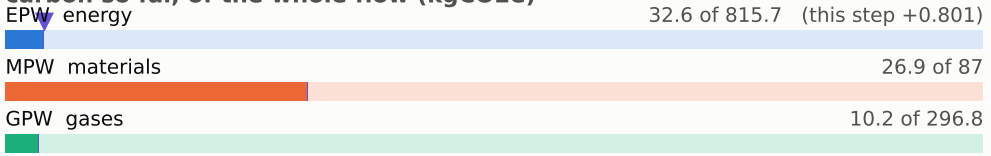

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

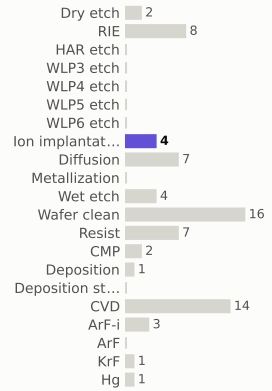

materials deposited (g)

gases emitted (g)

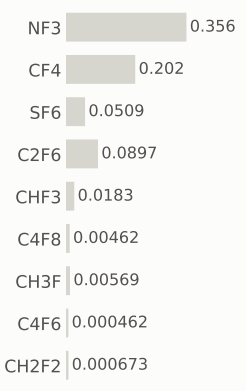

Step #980: Dry_etch

etch_strip · Dry_etch

0.801	70.5	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

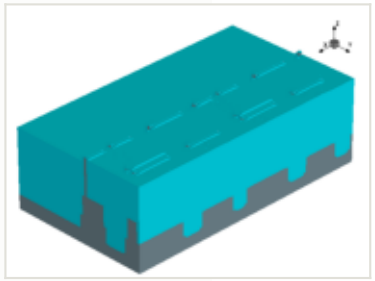

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

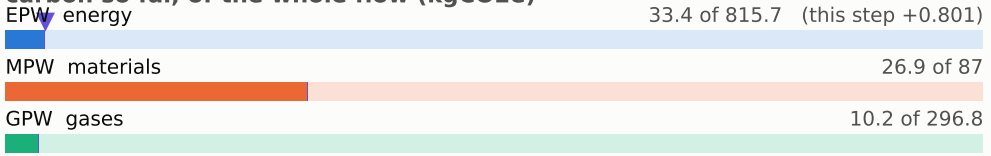

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

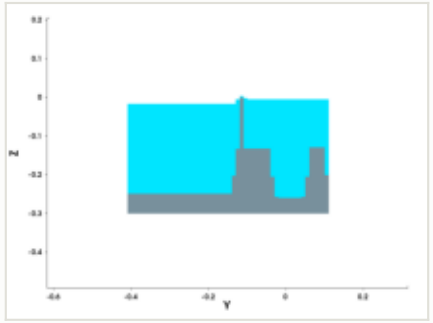

y cut at -0.150 µm

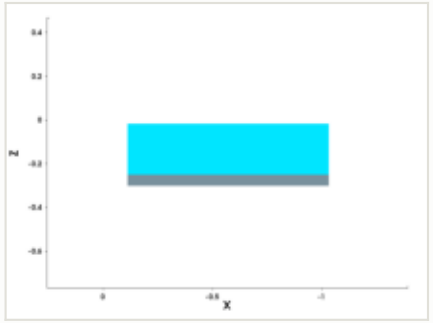

mask for this step

no mask for this step

steps by process area

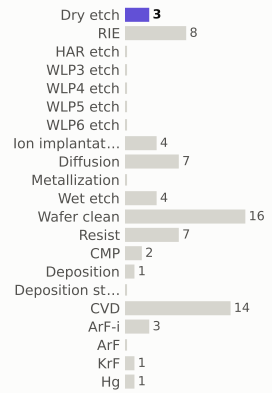

materials deposited (g)

gases emitted (g)

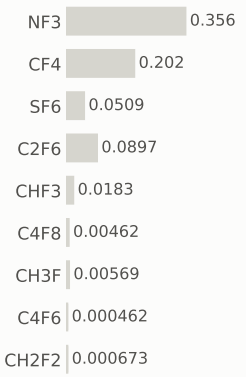

Step #990: Wafer_clean

clean · Wafer_clean

0.169	70.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

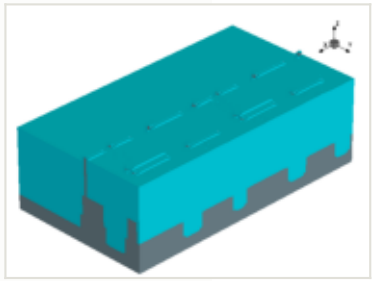

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

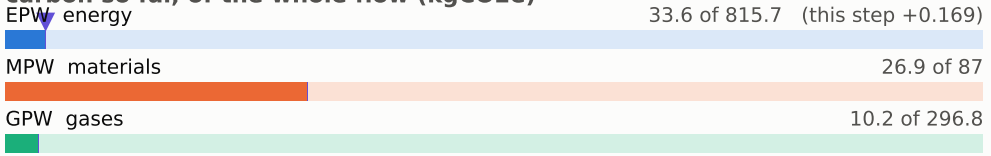

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

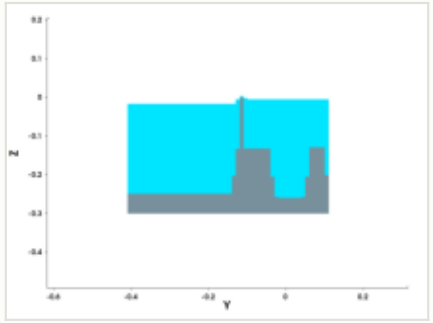

y cut at -0.150 µm

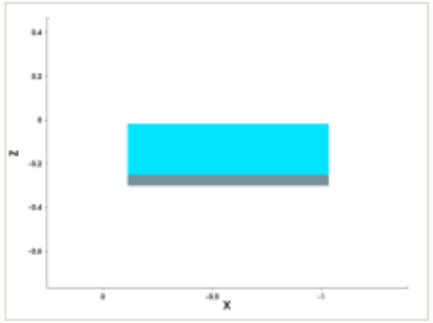

mask for this step

no mask for this step

steps by process area

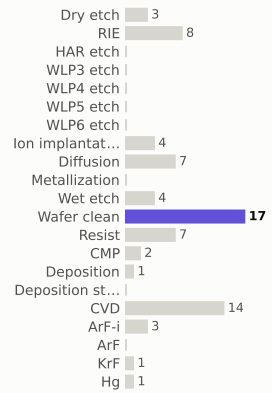

materials deposited (g)

gases emitted (g)

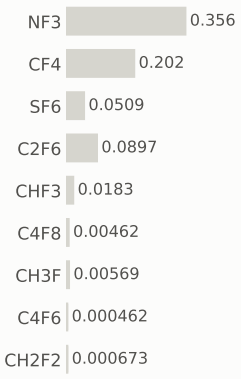

Step #1000: Resist

resist · Resist

0.169	70.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

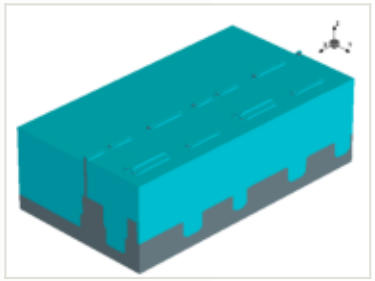

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

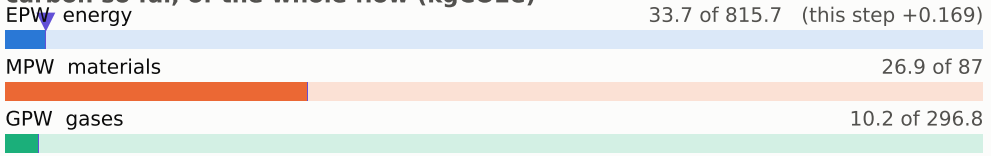

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

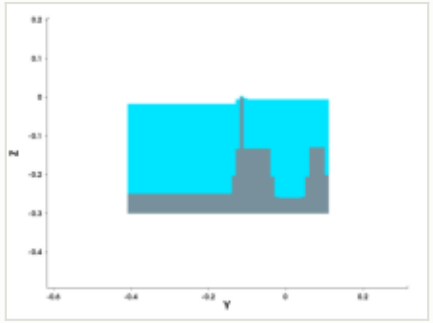

y cut at -0.150 µm

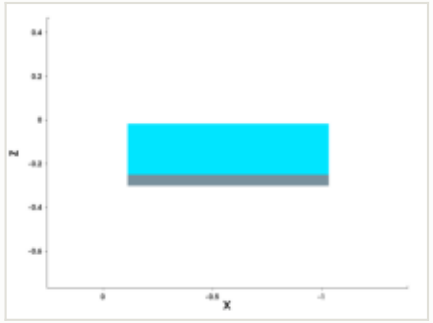

mask for this step

no mask for this step

steps by process area

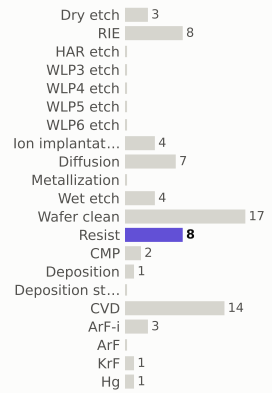

materials deposited (g)

gases emitted (g)

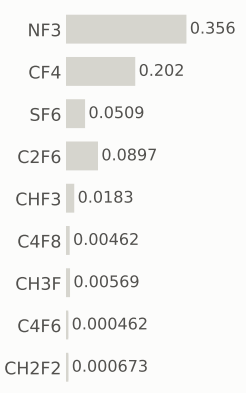

Step #1010: KrF

litho_patterning · KrF

0.199	71	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

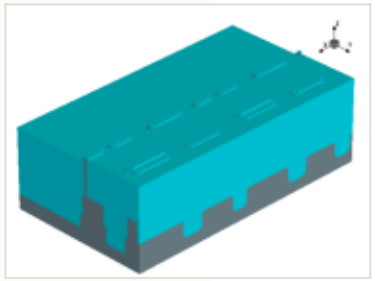

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

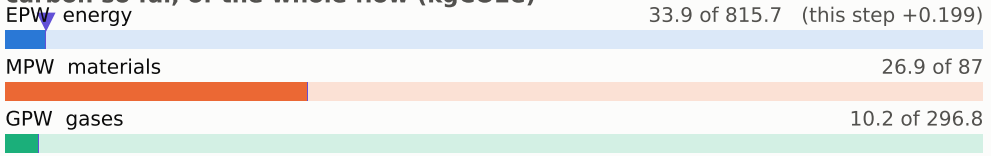

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

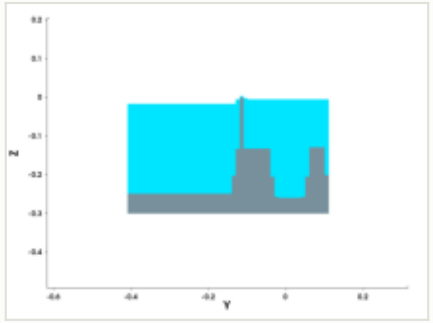

y cut at -0.150 µm

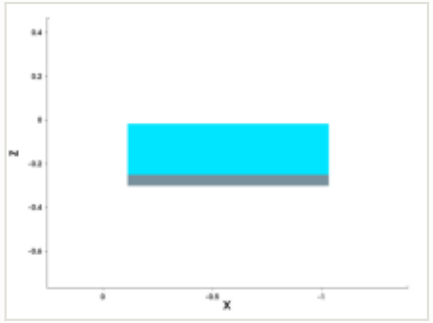

mask: layer 2100:0, positive (GDSII)

steps by process area

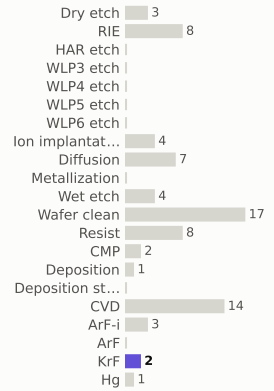

materials deposited (g)

gases emitted (g)

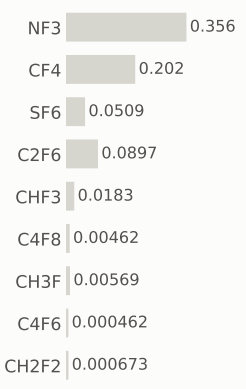

Step #1020: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	71.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

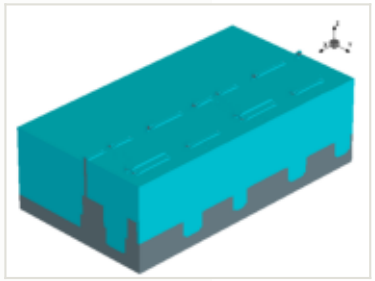

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

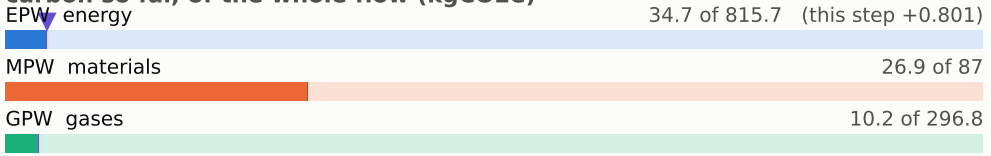

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

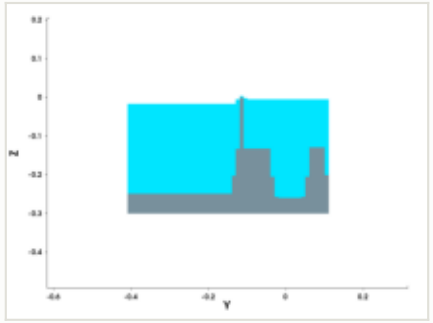

y cut at -0.150 µm

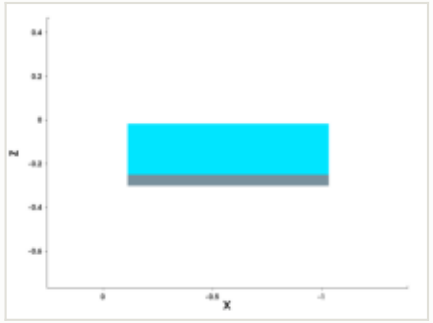

mask for this step

no mask for this step

steps by process area

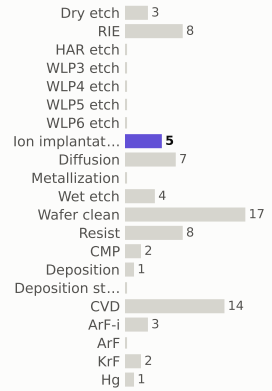

materials deposited (g)

gases emitted (g)

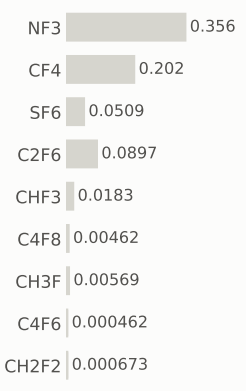

Step #1030: Dry_etch

etch_strip · Dry_etch

0.801	72.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

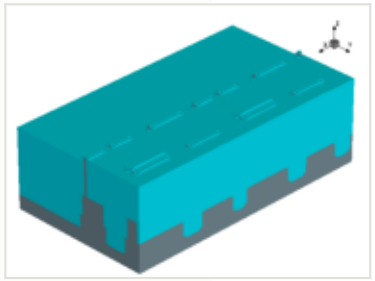

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

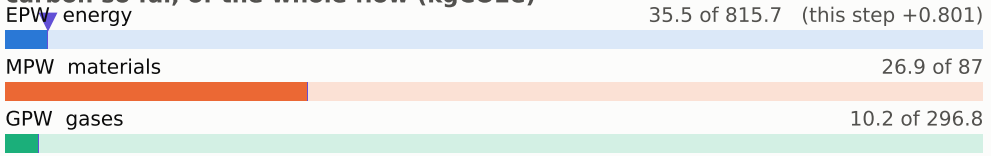

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

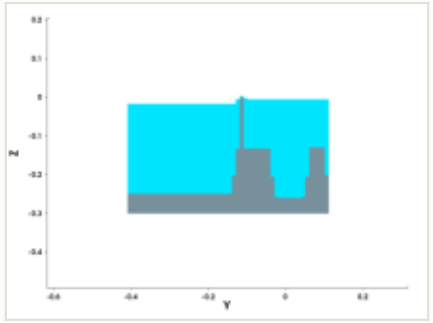

y cut at -0.150 µm

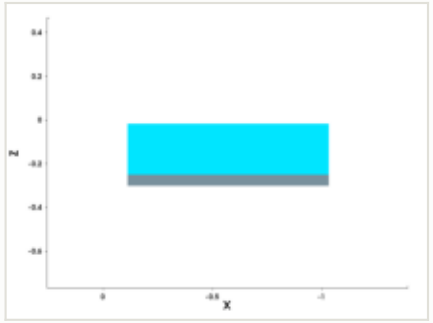

mask for this step

no mask for this step

steps by process area

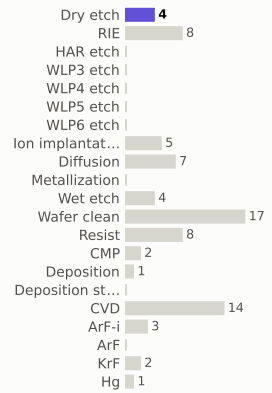

materials deposited (g)

gases emitted (g)

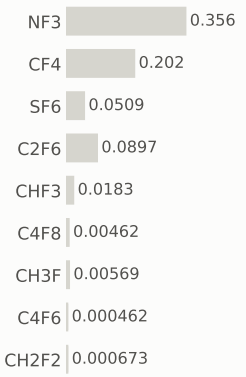

Step #1040: Wafer_clean

clean · Wafer_clean

0.169	72.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

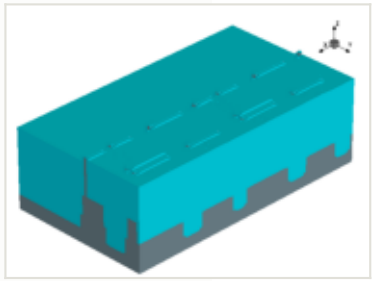

x cut at -0.570 µm

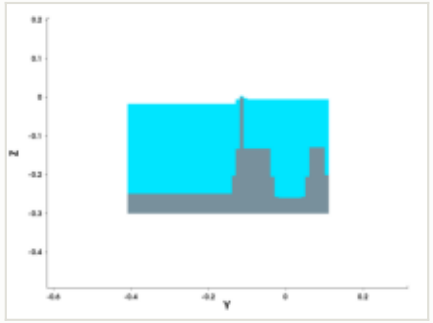

y cut at -0.150 µm

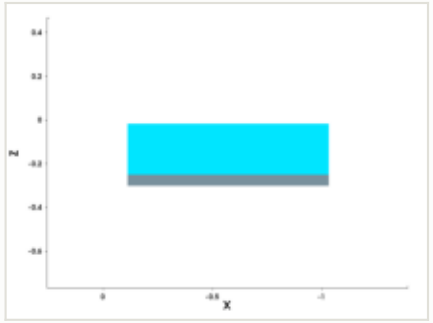

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

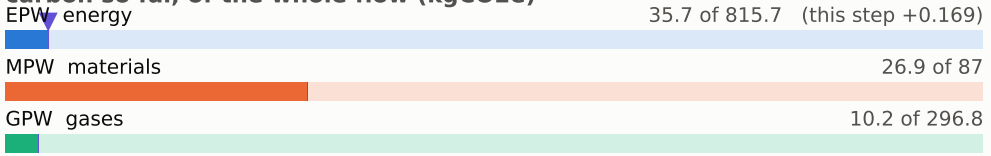

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)



Step #1050: Resist

resist · Resist

0.169	73	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

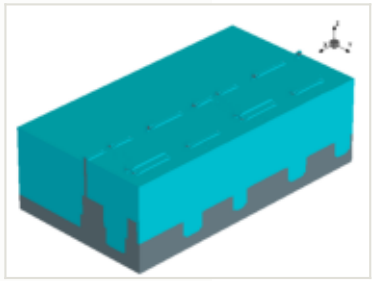

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

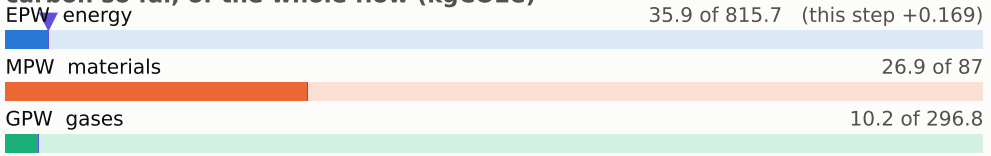

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

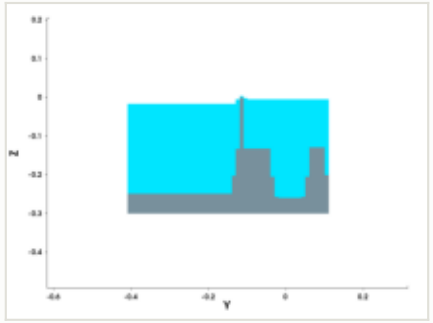

y cut at -0.150 µm

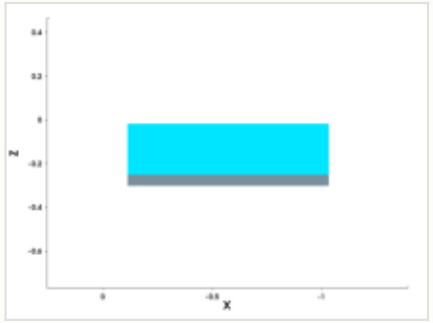

mask for this step

no mask for this step

steps by process area

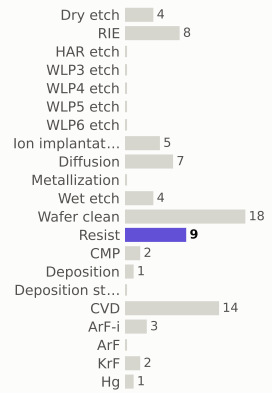

materials deposited (g)

gases emitted (g)

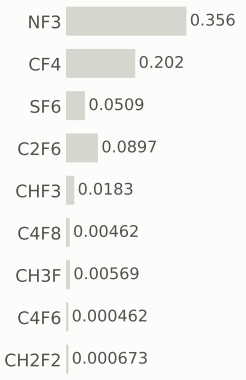

Step #1060: KrF

litho_patterning · KrF

0.199	73.1	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

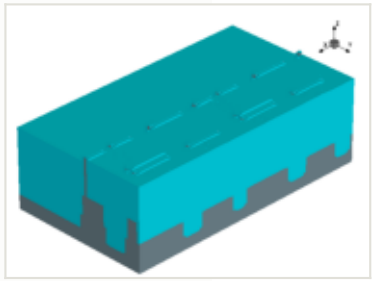

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

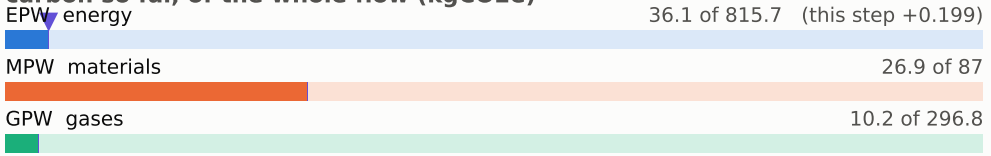

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

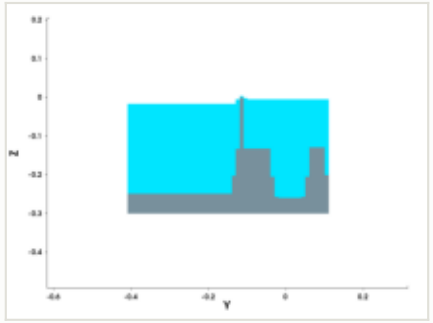

y cut at -0.150 µm

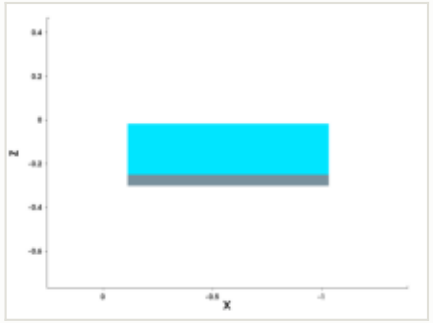

mask: layer 2100:0, positive (GDSII)

steps by process area

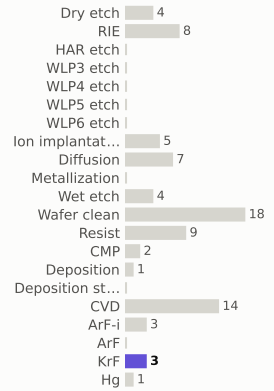

materials deposited (g)

gases emitted (g)

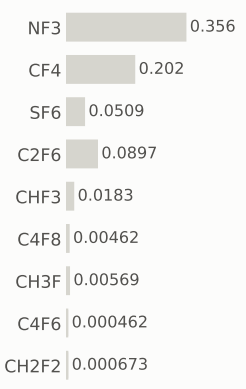

Step #1070: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	74	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

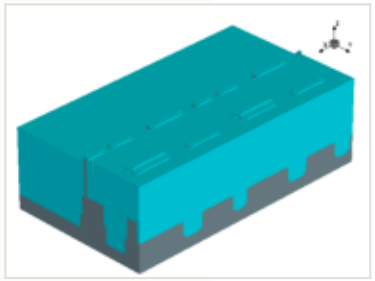

x cut at -0.570 µm

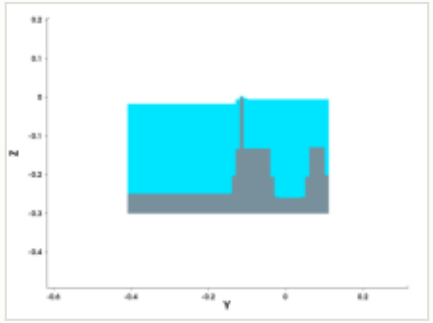

y cut at -0.150 µm

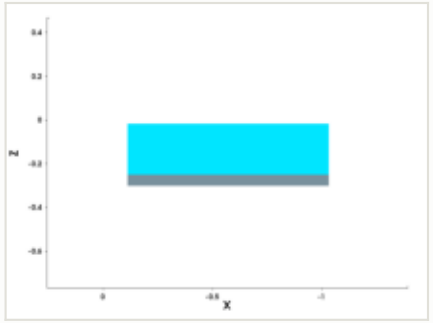

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

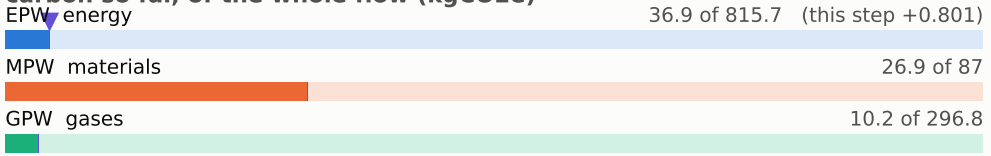

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)



Step #1080: Dry_etch

etch_strip · Dry_etch

0.801	74.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

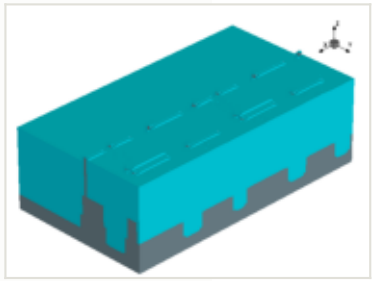

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

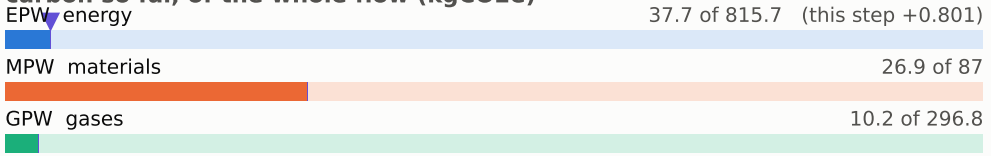

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

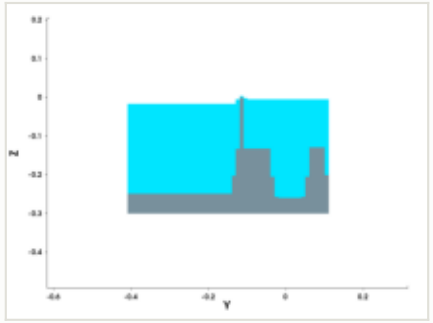

y cut at -0.150 µm

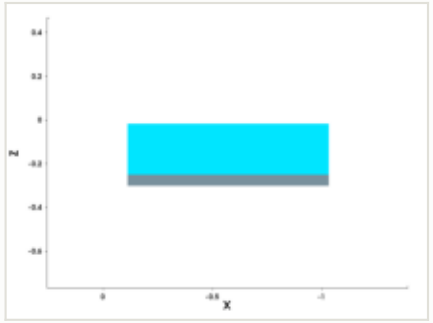

mask for this step

no mask for this step

steps by process area

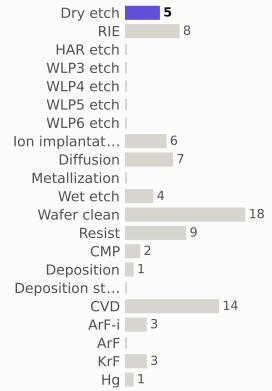

materials deposited (g)

gases emitted (g)

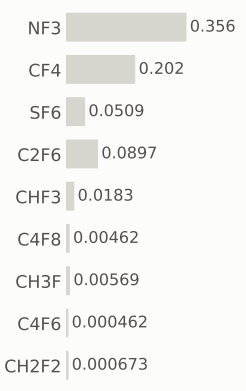

Step #1090: Wafer_clean

clean · Wafer_clean

0.169	74.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

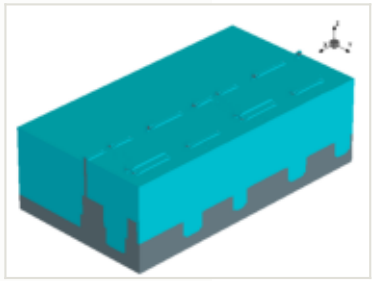

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

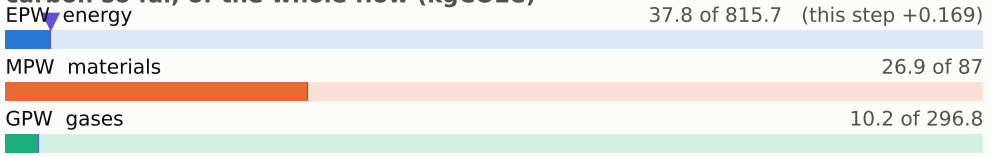

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

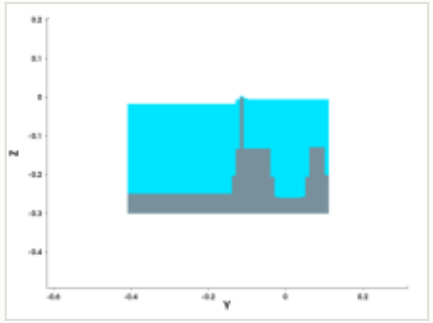

y cut at -0.150 µm

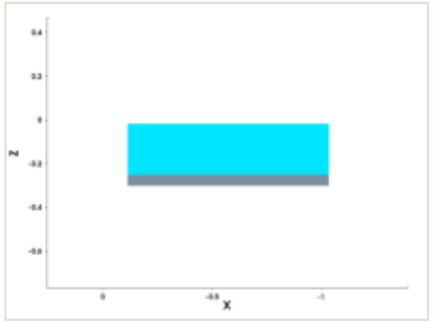

mask for this step

no mask for this step

steps by process area

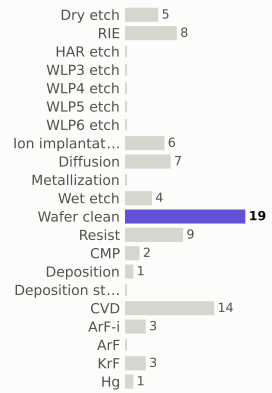

materials deposited (g)

gases emitted (g)

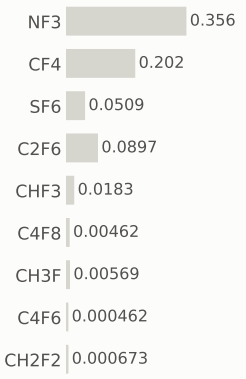

Step #1100: Resist

resist · Resist

0.169	75.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

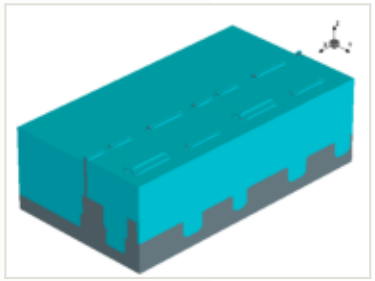

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

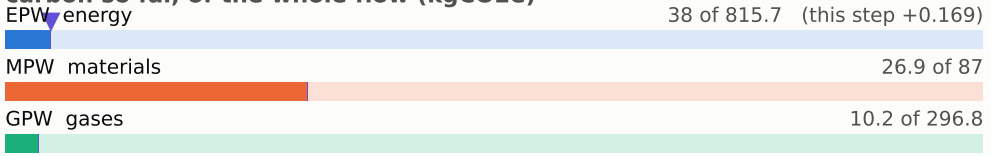

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

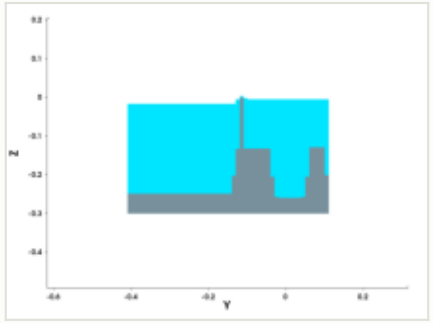

y cut at -0.150 µm

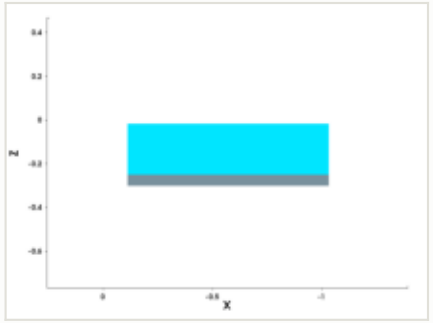

mask for this step

no mask for this step

steps by process area

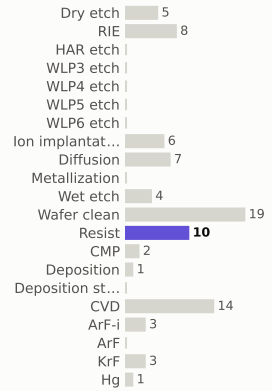

materials deposited (g)

gases emitted (g)

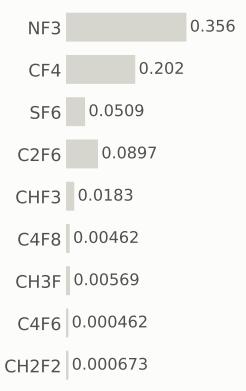

Step #1110: KrF

litho_patterning · KrF

0.199	75.3	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

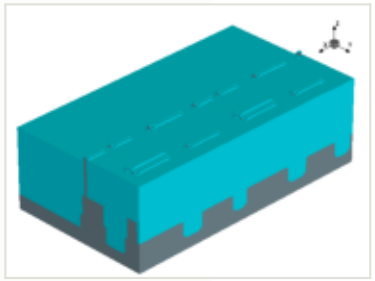

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

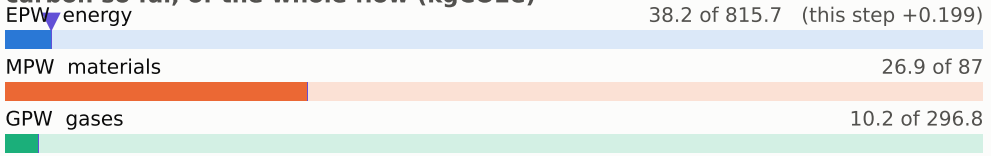

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

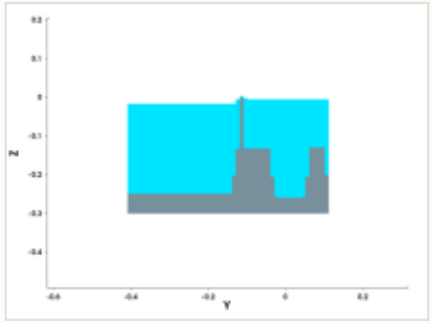

y cut at -0.150 µm

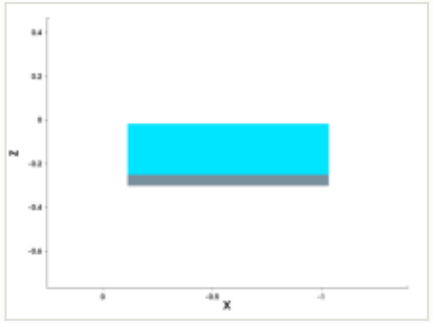

mask: layer 2100:0, positive (GDSII)

steps by process area

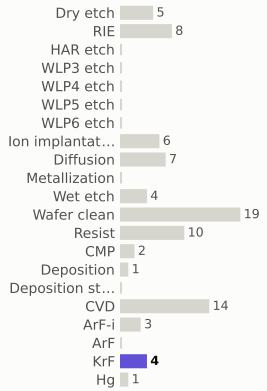

materials deposited (g)

gases emitted (g)

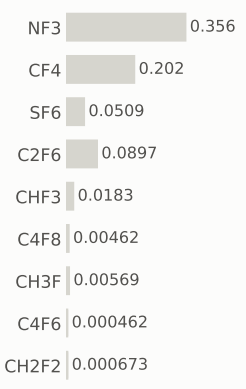

Step #1120: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	76.1	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

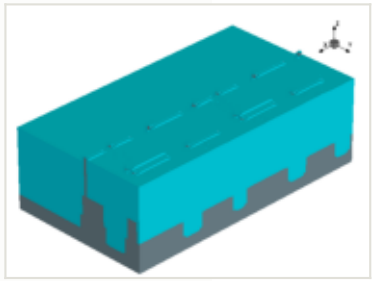

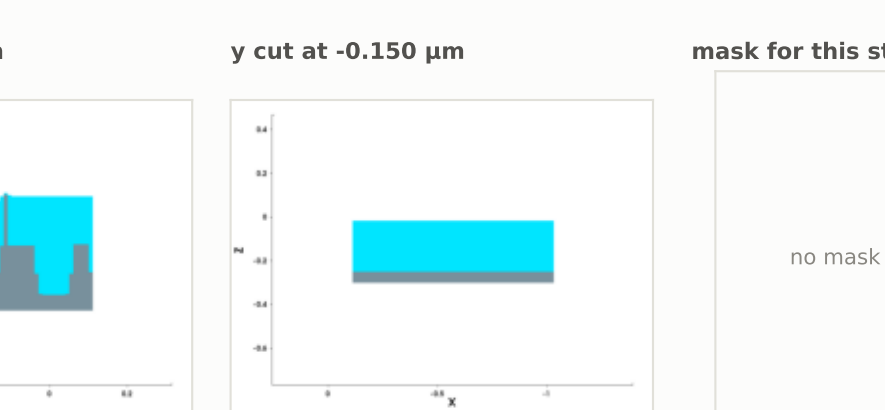

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

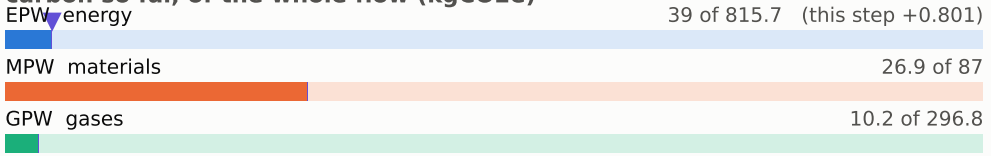

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

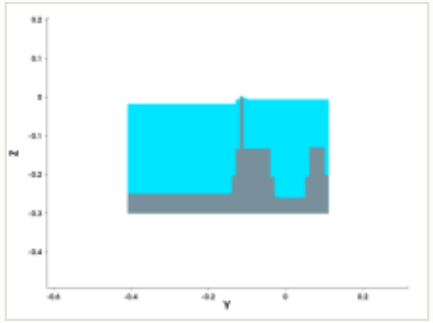

y cut at -0.150 µm

mask for this step

no mask for this step

steps by process area

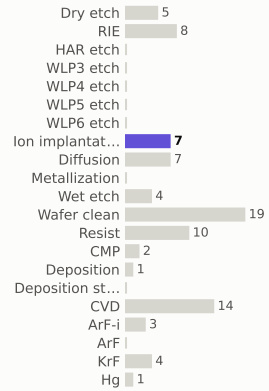

materials deposited (g)

gases emitted (g)

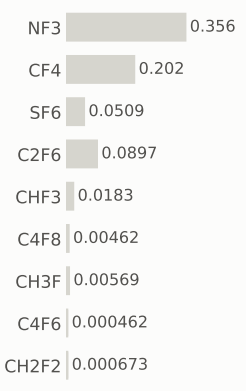

Step #1130: Dry_etch

etch_strip · Dry_etch

0.801	76.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

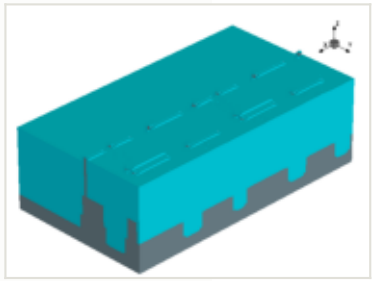

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

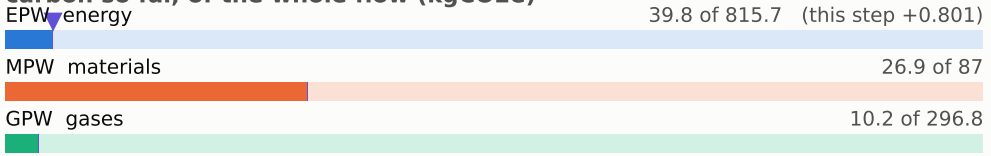

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

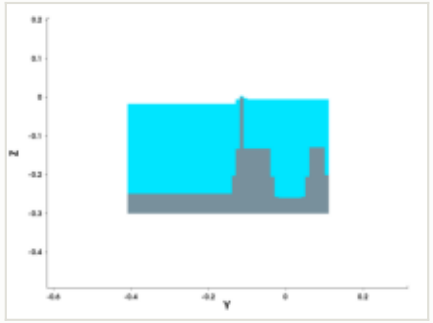

y cut at -0.150 µm

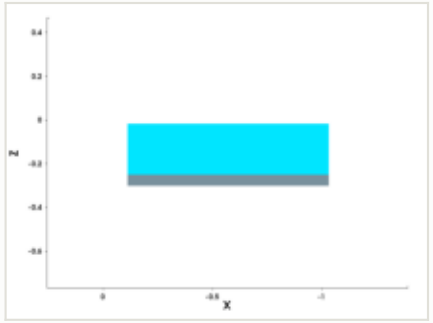

mask for this step

no mask for this step

steps by process area

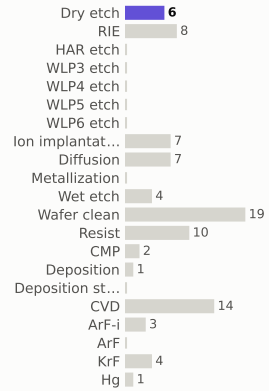

materials deposited (g)

gases emitted (g)

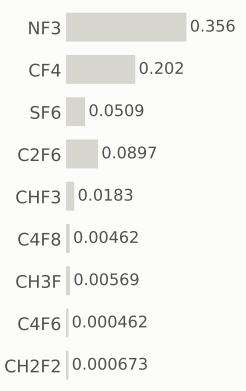

Step #1140: Wafer_clean

clean · Wafer_clean

0.169	77.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

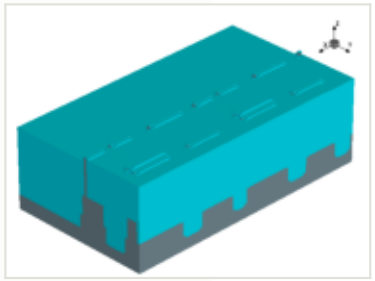

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

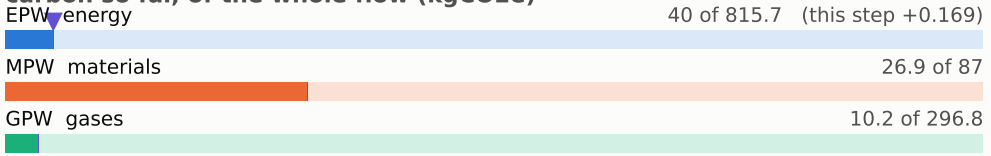

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

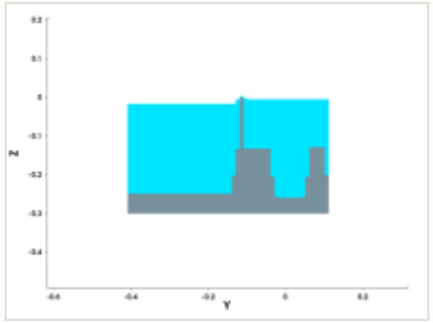

y cut at -0.150 µm

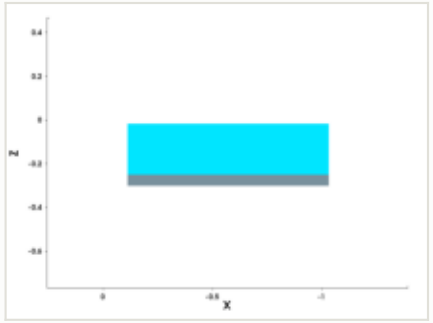

mask for this step

no mask for this step

steps by process area

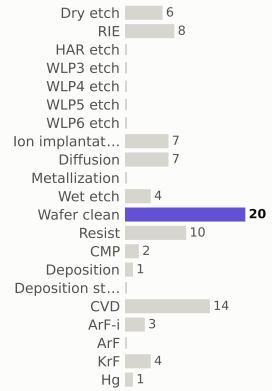

materials deposited (g)

gases emitted (g)

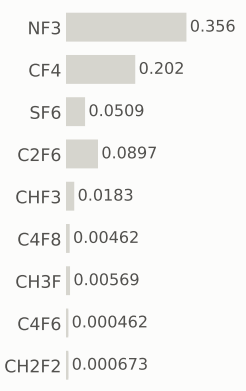

Step #1150: Resist

resist · Resist

0.169	77.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

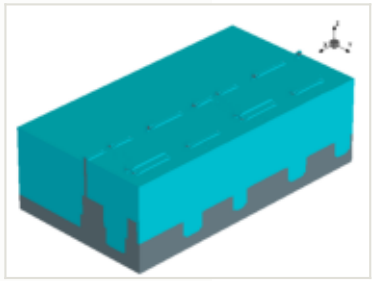

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

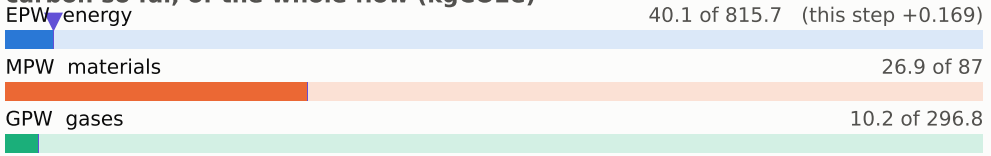

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

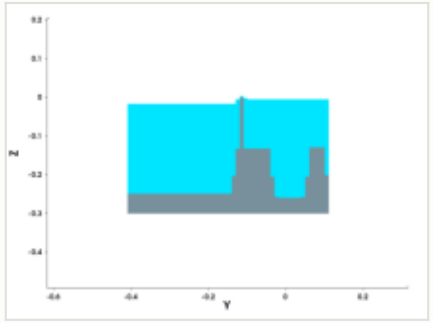

y cut at -0.150 µm

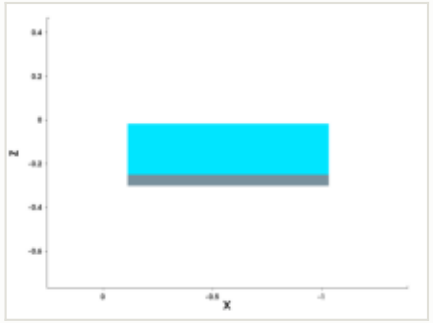

mask for this step

no mask for this step

steps by process area

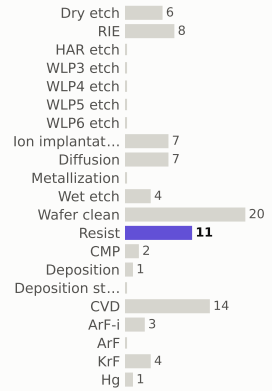

materials deposited (g)

gases emitted (g)

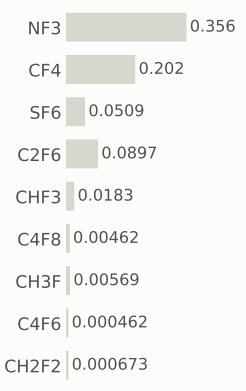

Step #1160: KrF

litho_patterning · KrF

0.199	77.4	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

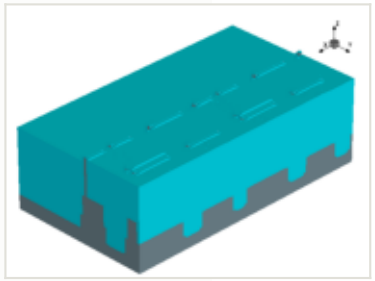

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

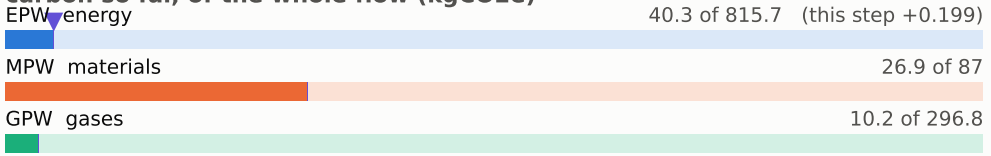

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

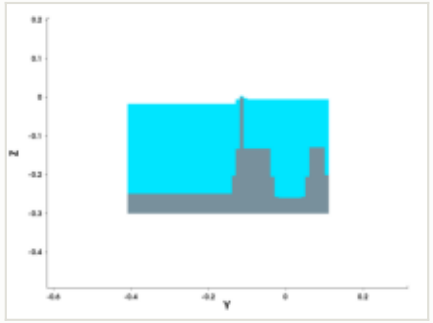

y cut at -0.150 µm

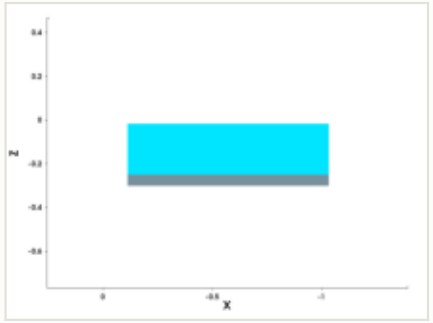

mask: layer 2100:0, positive (GDSII)

steps by process area

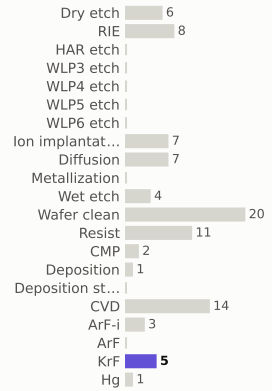

materials deposited (g)

gases emitted (g)

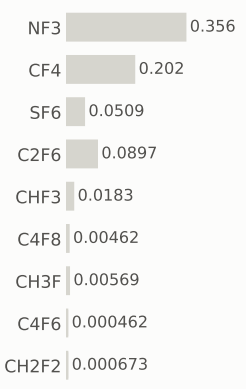

Step #1170: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	78.2	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

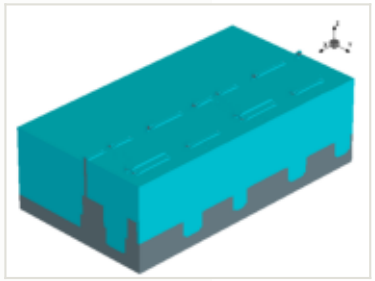

x cut at -0.570 µm

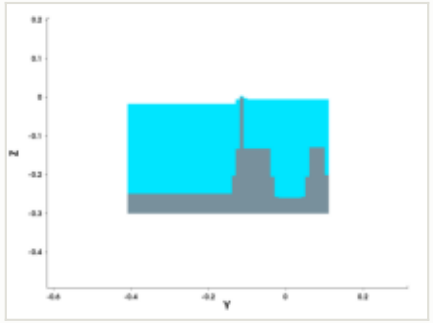

y cut at -0.150 µm

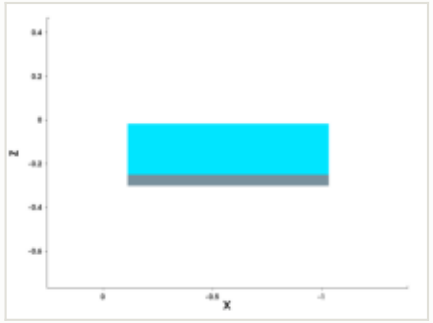

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

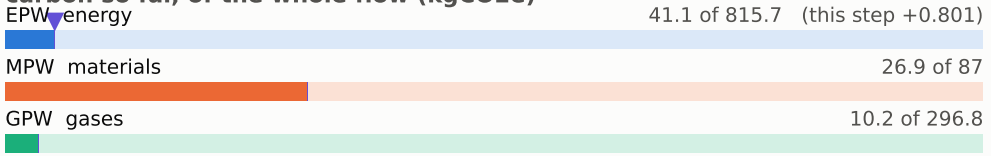

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

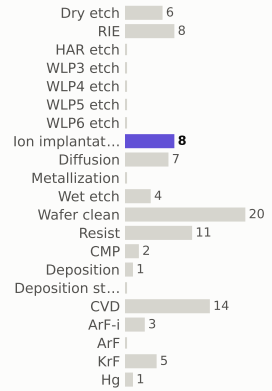

materials deposited (g)

gases emitted (g)

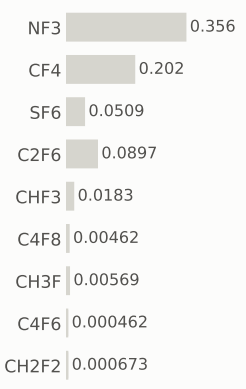

Step #1180: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	79	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

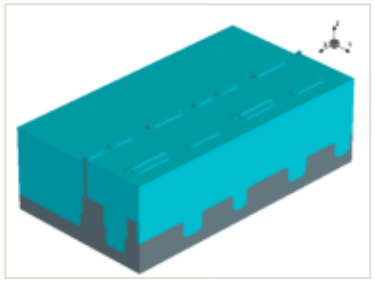

x cut at -0.570 µm

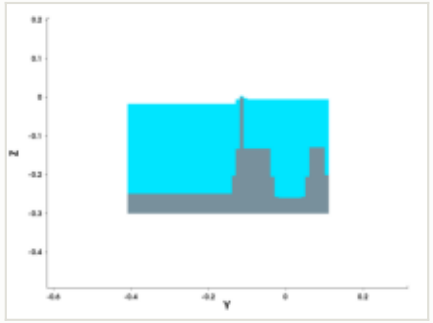

y cut at -0.150 µm

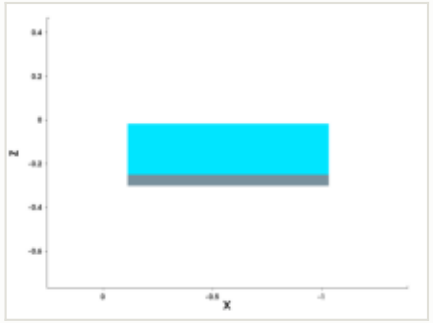

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

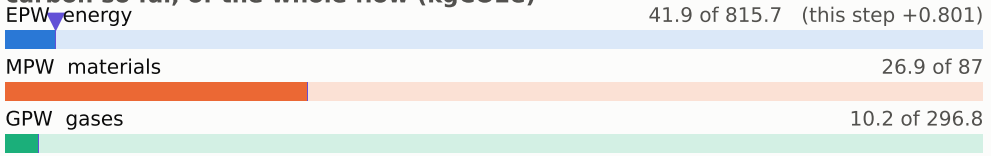

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

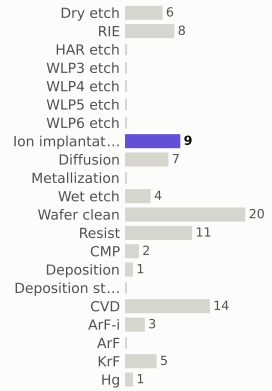

materials deposited (g)

gases emitted (g)

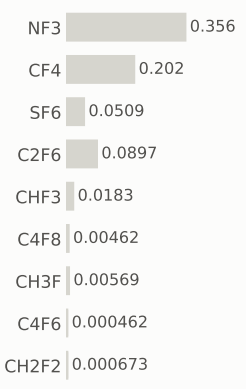

Step #1190: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	79.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

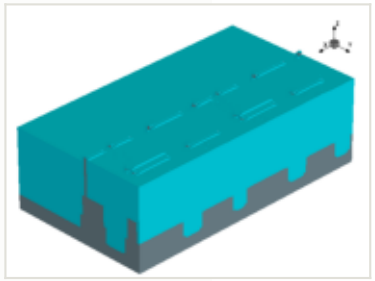

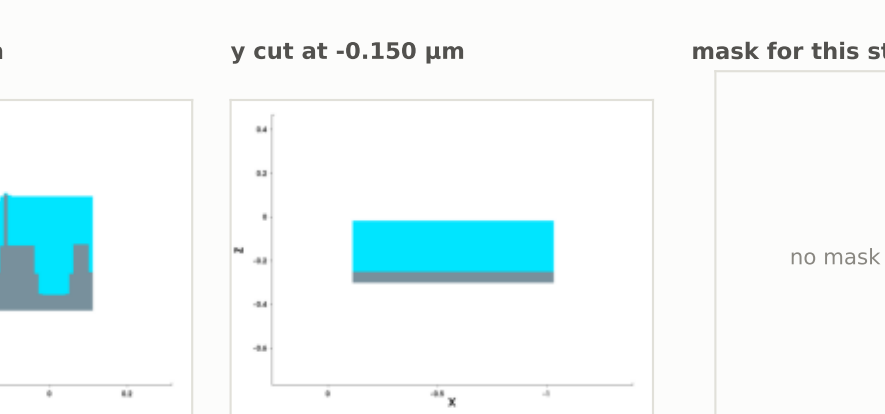

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

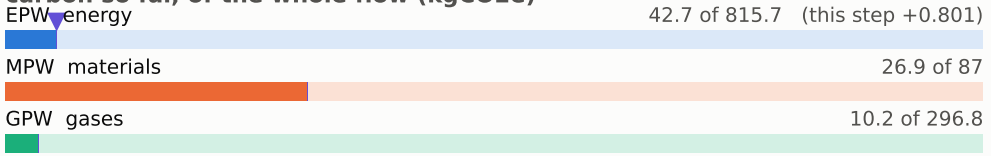

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

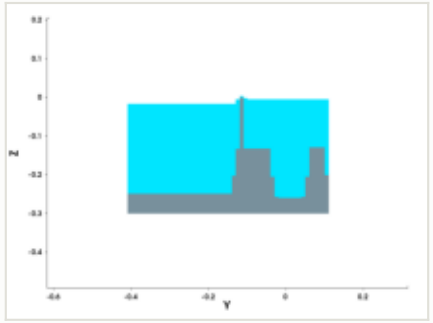

y cut at -0.150 µm

mask for this step

no mask for this step

steps by process area

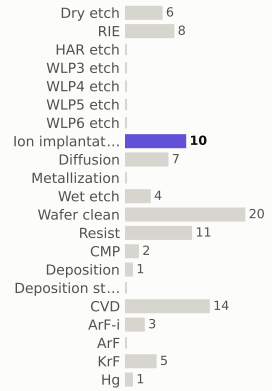

materials deposited (g)

gases emitted (g)

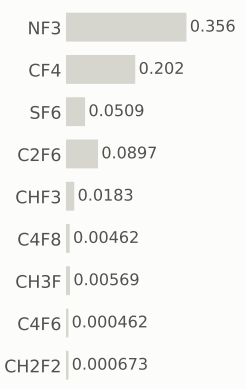

Step #1200: Dry_etch

etch_strip · Dry_etch

0.801	80.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

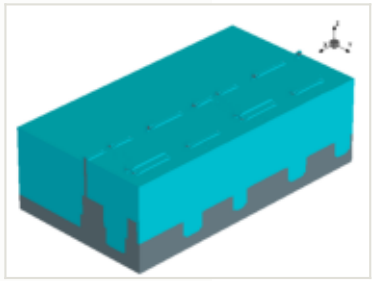

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

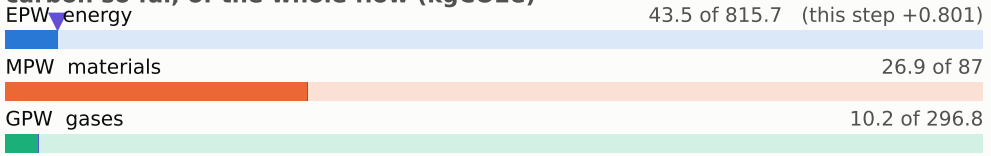

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

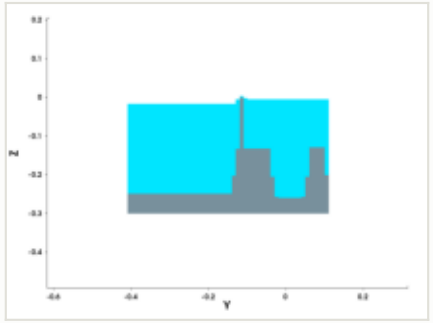

y cut at -0.150 µm

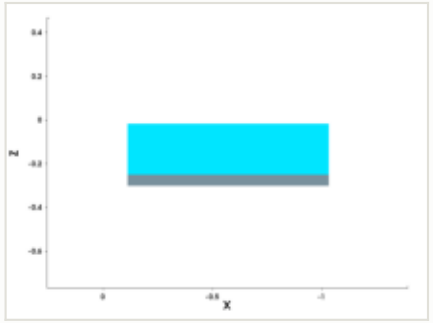

mask for this step

no mask for this step

steps by process area

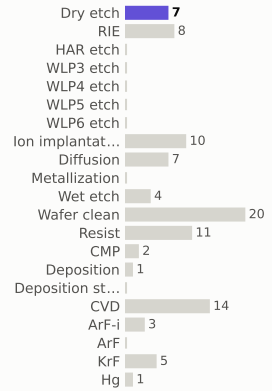

materials deposited (g)

gases emitted (g)

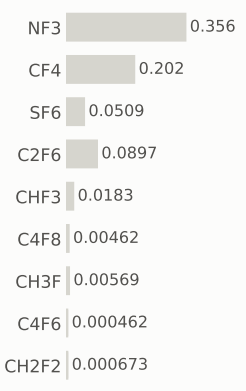

Step #1210: Wafer_clean

clean · Wafer_clean

0.169	80.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

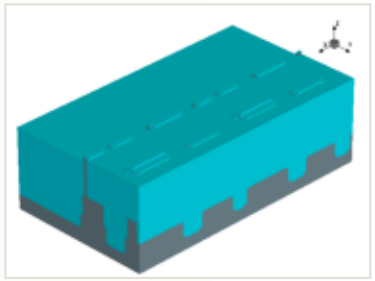

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

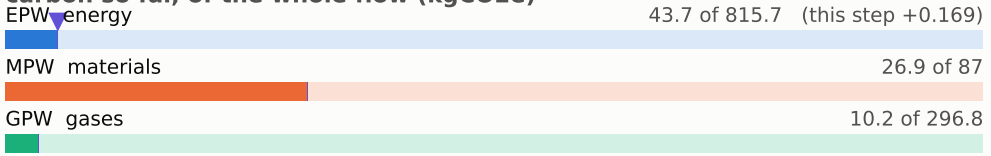

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

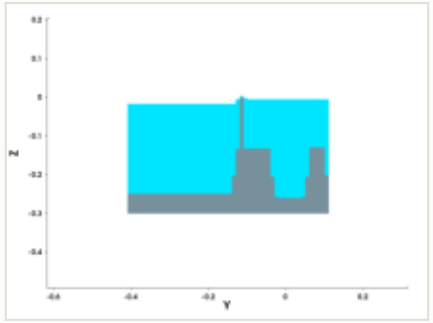

y cut at -0.150 µm

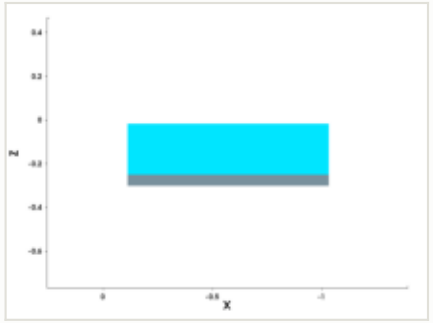

mask for this step

no mask for this step

steps by process area

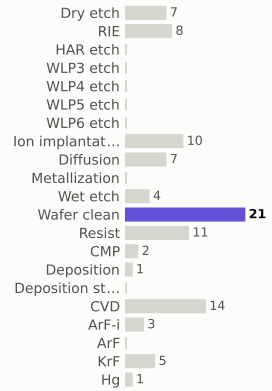

materials deposited (g)

gases emitted (g)

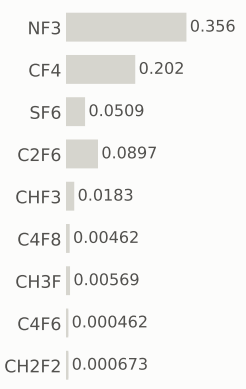

Step #1220: Resist

resist · Resist

0.169	81	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

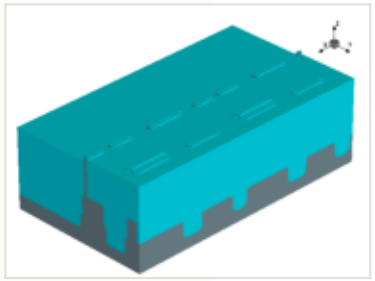

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

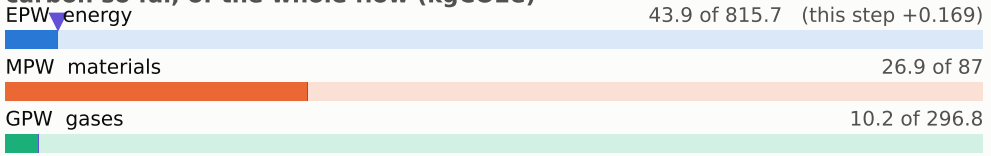

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

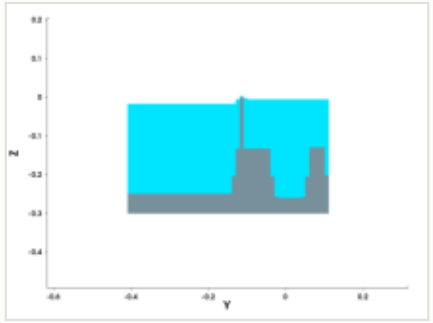

y cut at -0.150 µm

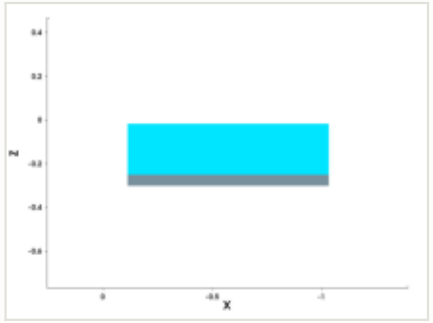

mask for this step

no mask for this step

steps by process area

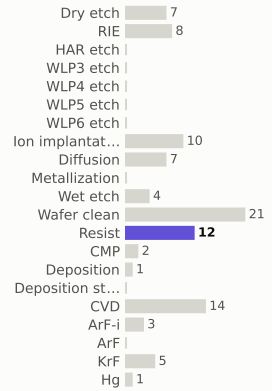

materials deposited (g)

gases emitted (g)

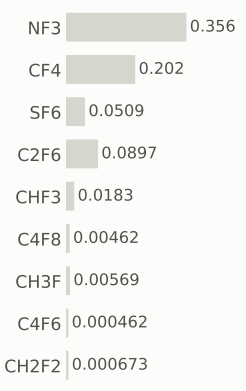

Step #1230: KrF

litho_patterning · KrF

0.199	81.2	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

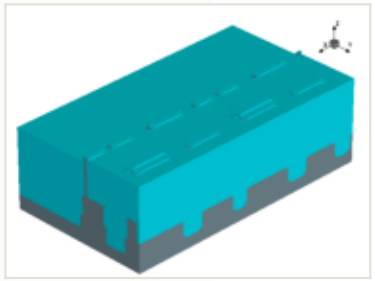

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

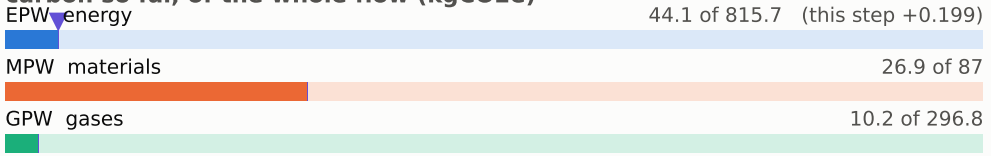

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

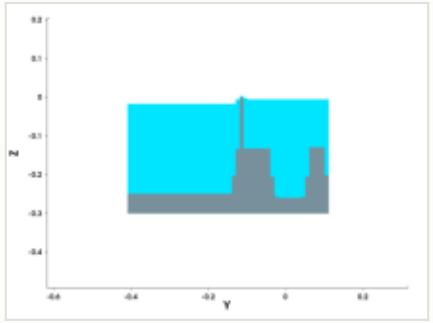

y cut at -0.150 µm

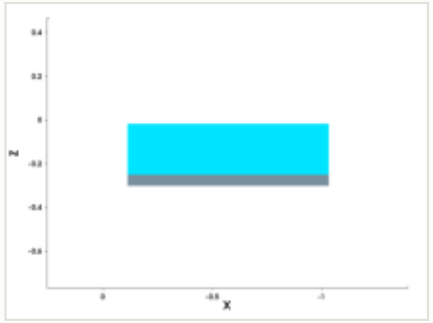

mask: layer 2100:0, positive (GDSII)

steps by process area

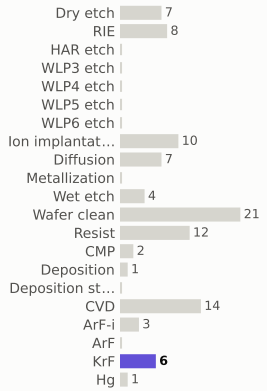

materials deposited (g)

gases emitted (g)

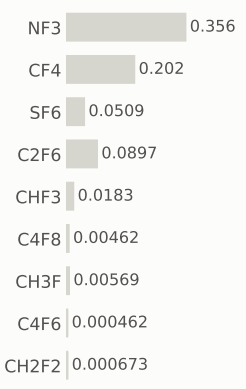

Step #1240: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	82	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

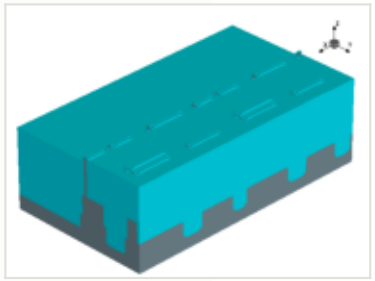

x cut at -0.570 µm

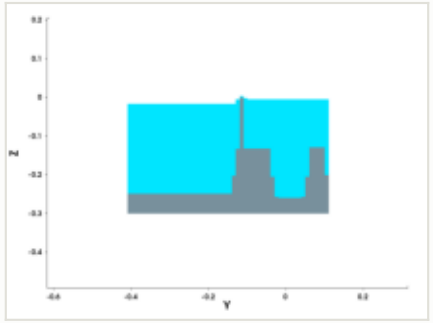

y cut at -0.150 µm

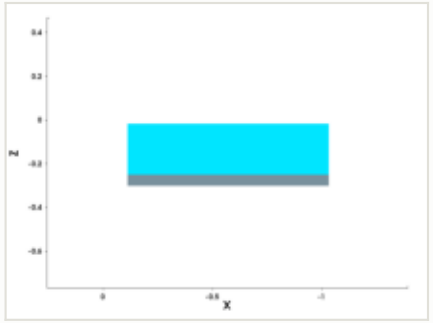

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

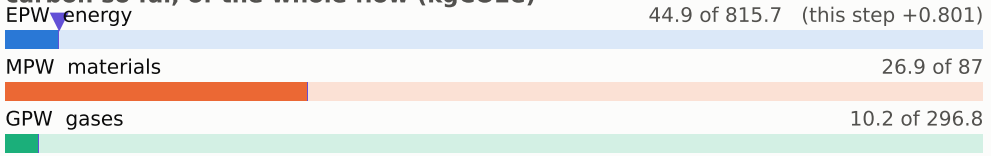

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

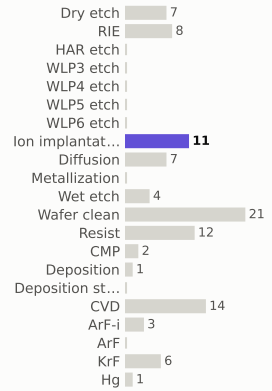

materials deposited (g)

gases emitted (g)

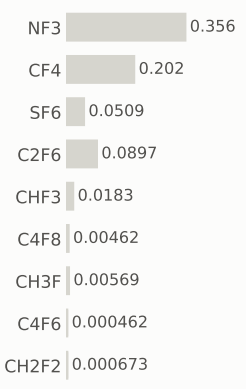

Step #1250: Dry_etch

etch_strip · Dry_etch

0.801	82.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

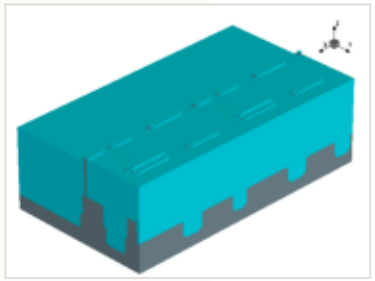

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

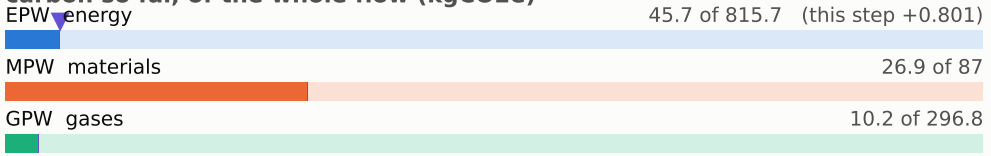

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

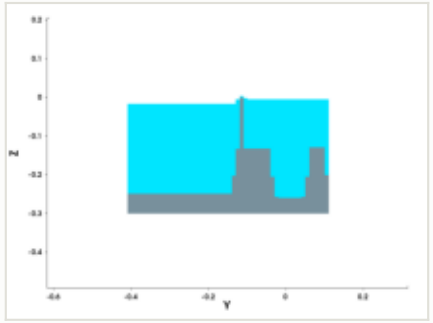

y cut at -0.150 µm

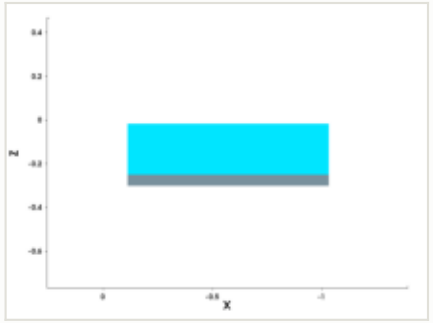

mask for this step

no mask for this step

steps by process area

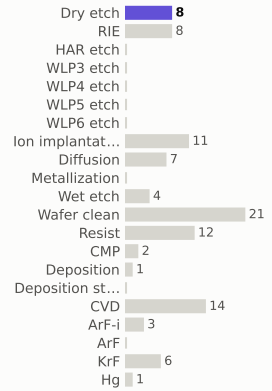

materials deposited (g)

gases emitted (g)

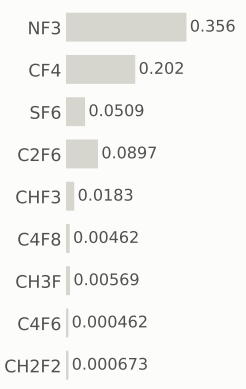

Step #1260: Wafer_clean

clean · Wafer_clean

0.169	82.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

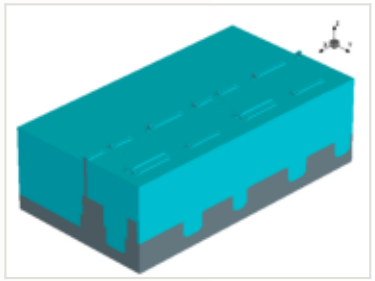

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

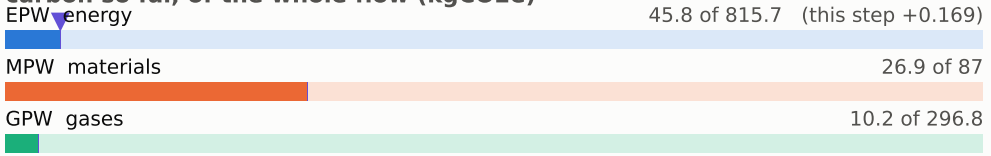

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

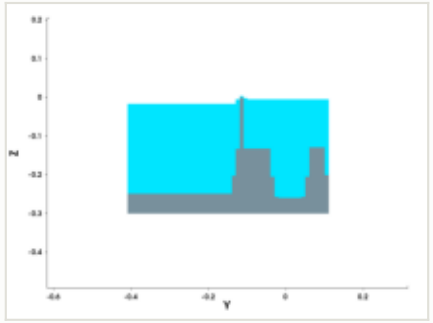

y cut at -0.150 µm

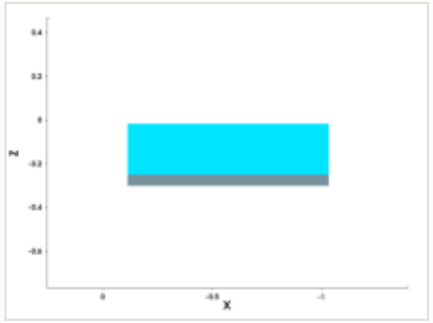

mask for this step

no mask for this step

steps by process area

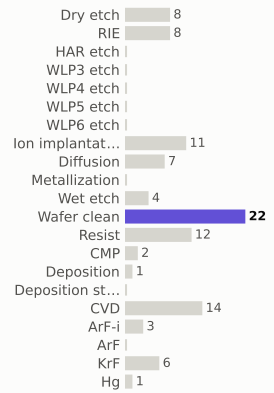

materials deposited (g)

gases emitted (g)

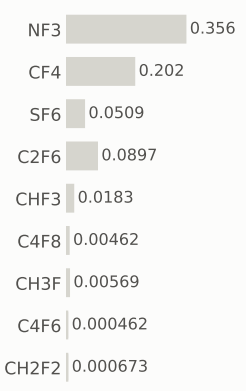

Step #1270: Resist

resist · Resist

0.169	83.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

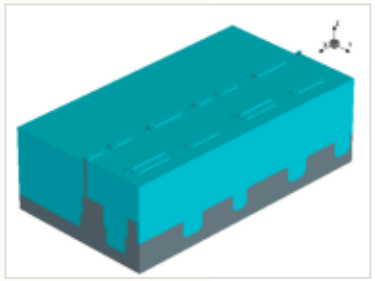

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

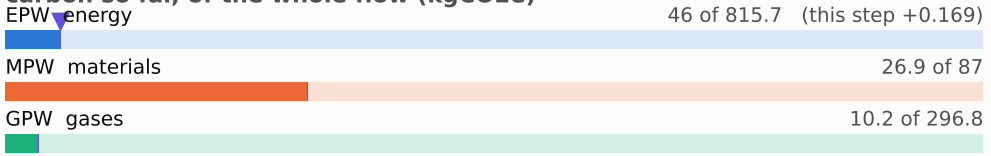

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

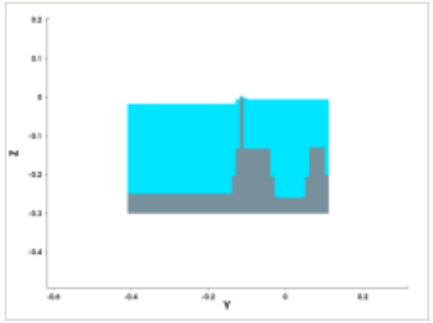

y cut at -0.150 µm

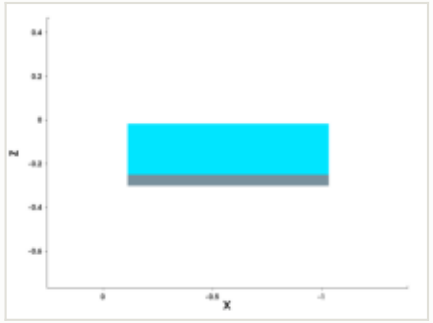

mask for this step

no mask for this step

steps by process area

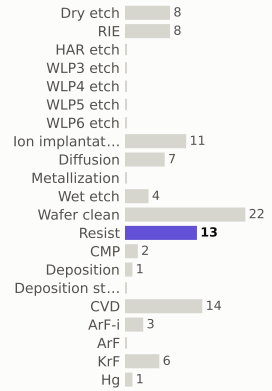

materials deposited (g)

gases emitted (g)

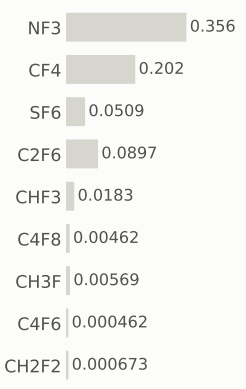

Step #1280: KrF

litho_patterning · KrF

0.199	83.3	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

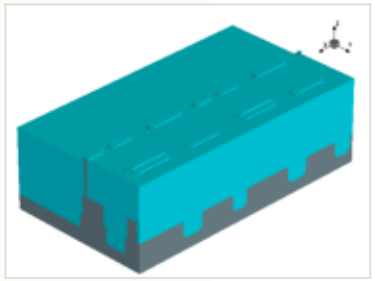

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

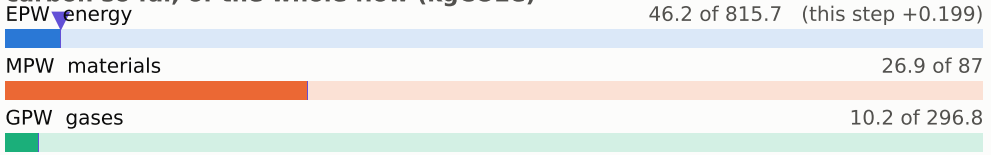

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

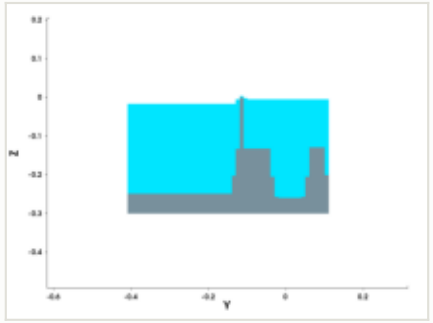

y cut at -0.150 µm

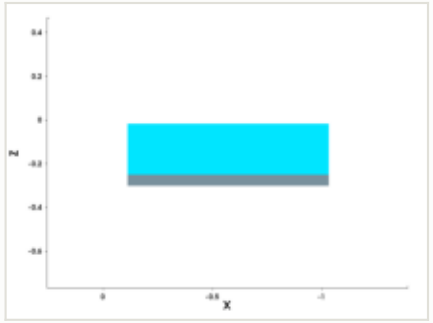

mask: layer 2100:0, positive (GDSII)

steps by process area

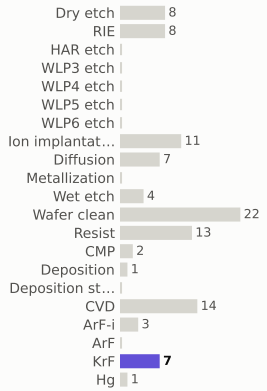

materials deposited (g)

gases emitted (g)

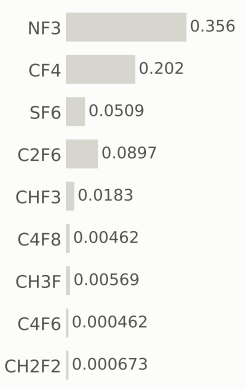

Step #1290: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	84.1	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

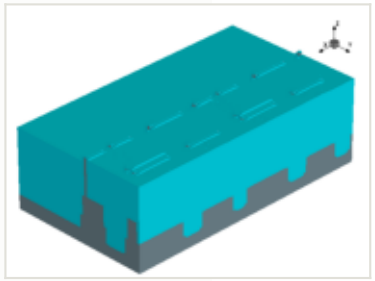

x cut at -0.570 µm

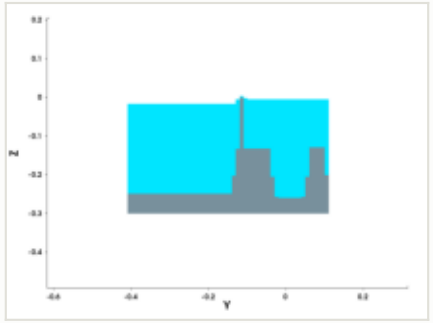

y cut at -0.150 µm

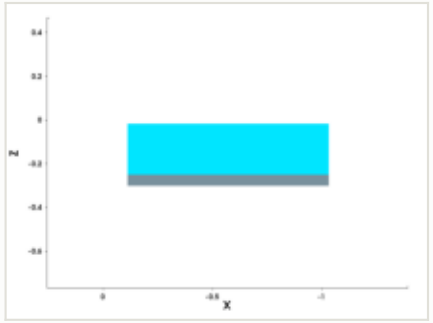

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

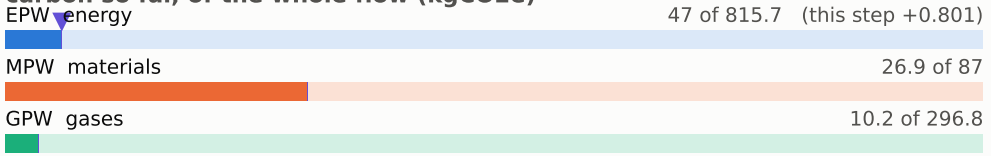

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

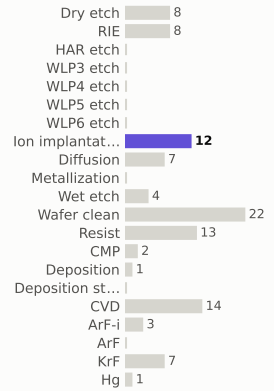

materials deposited (g)

gases emitted (g)

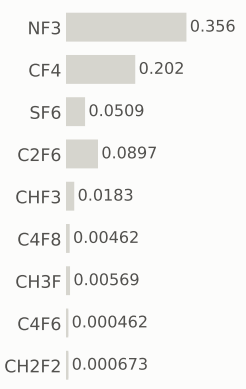

Step #1300: Dry_etch

etch_strip · Dry_etch

0.801	84.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

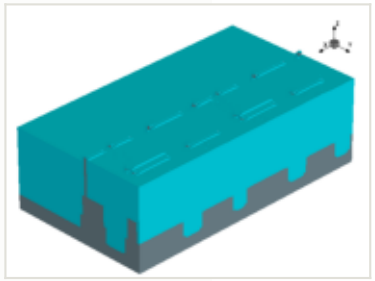

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

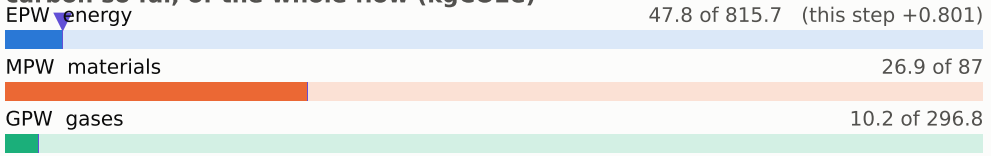

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

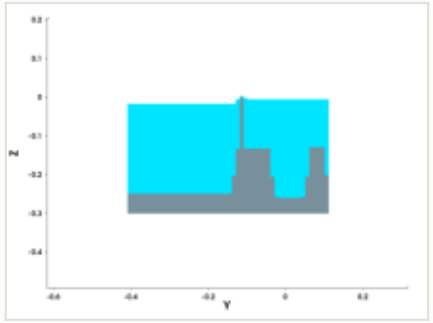

y cut at -0.150 µm

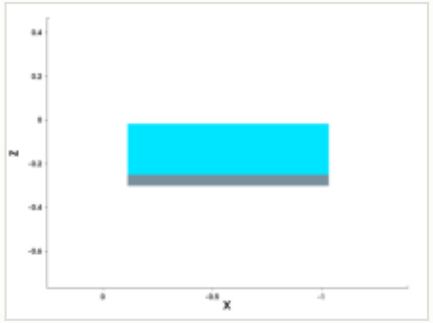

mask for this step

no mask for this step

steps by process area

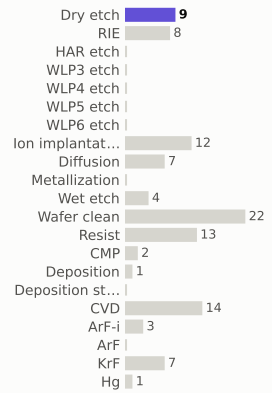

materials deposited (g)

gases emitted (g)

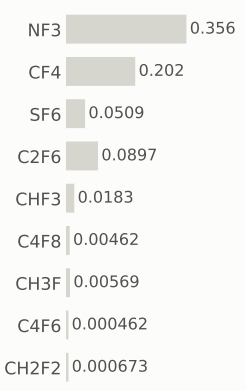

Step #1310: Wafer_clean

clean · Wafer_clean

0.169	85.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

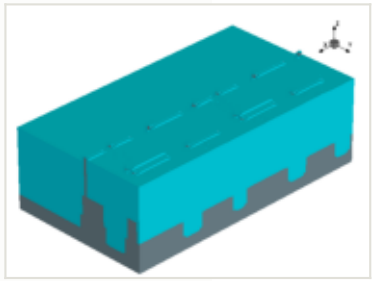

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

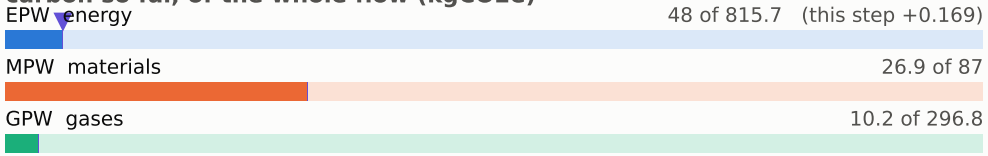

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

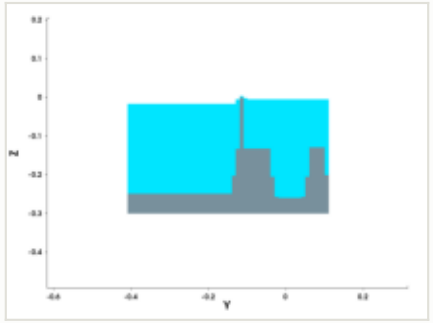

y cut at -0.150 µm

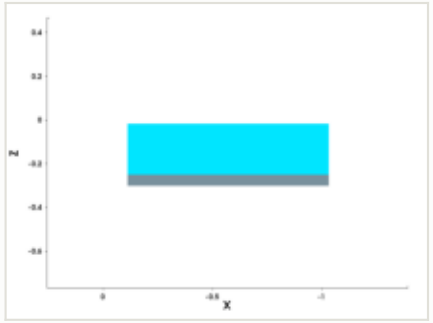

mask for this step

no mask for this step

steps by process area

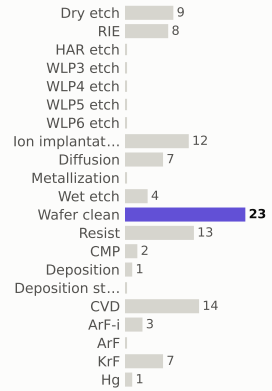

materials deposited (g)



gases emitted (g)

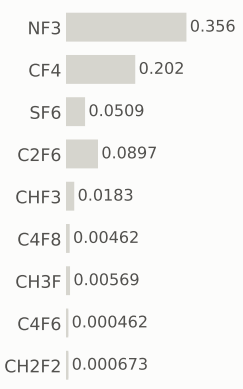

Step #1320: Resist

resist · Resist

0.169	85.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

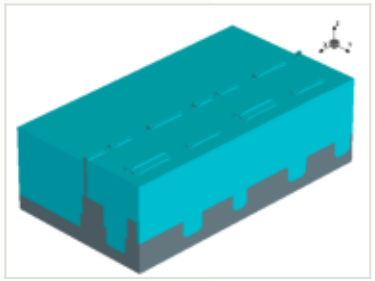

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

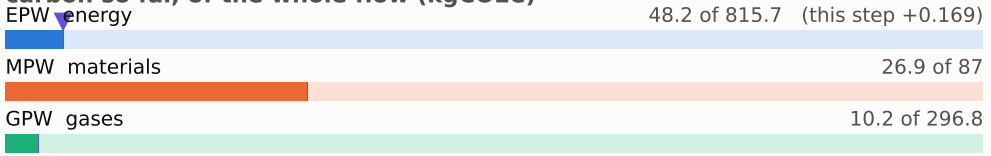

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

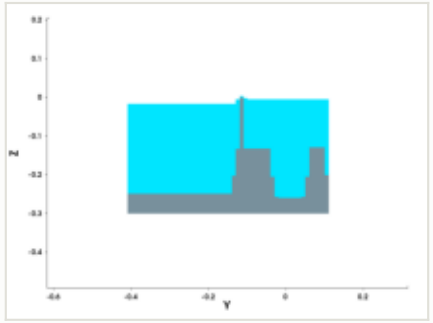

y cut at -0.150 µm

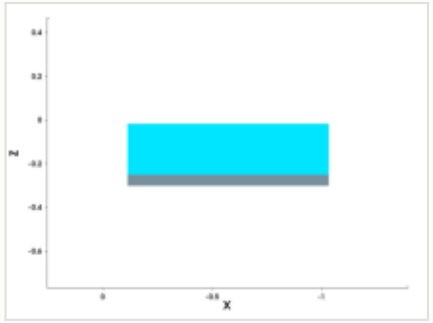

mask for this step

no mask for this step

steps by process area

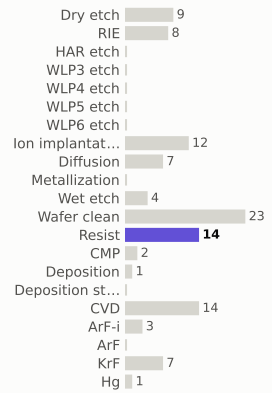

materials deposited (g)

gases emitted (g)

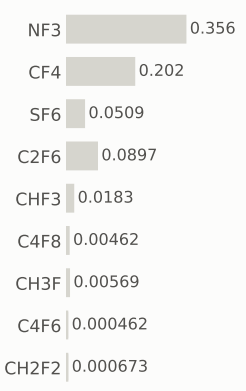

Step #1330: KrF

litho_patterning · KrF

0.199	85.4	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

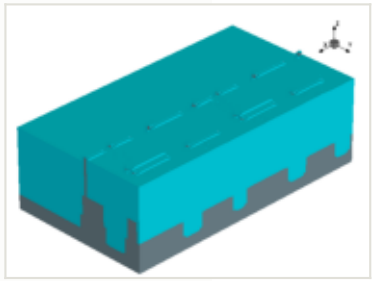

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

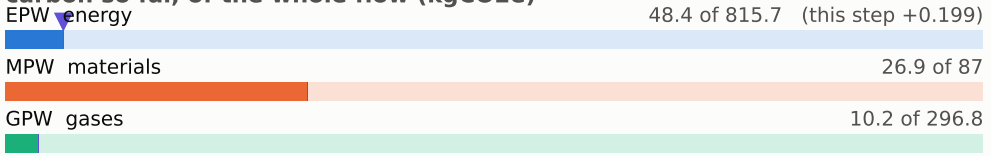

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

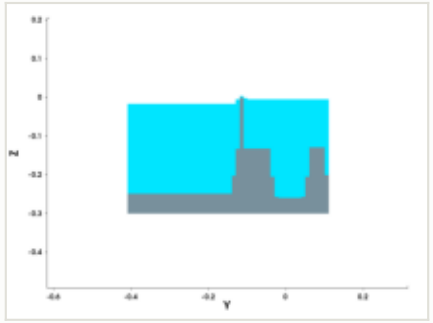

y cut at -0.150 µm

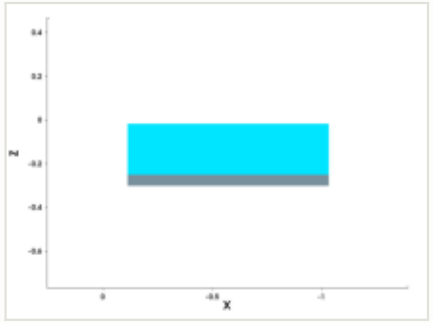

mask: layer 2100:0, positive (GDSII)

steps by process area

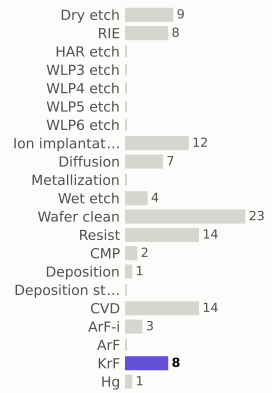

materials deposited (g)

gases emitted (g)

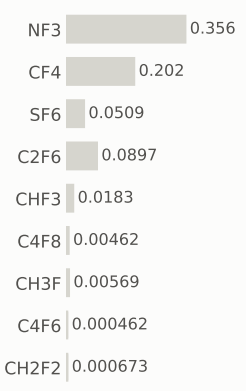

Step #1340: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	86.2	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

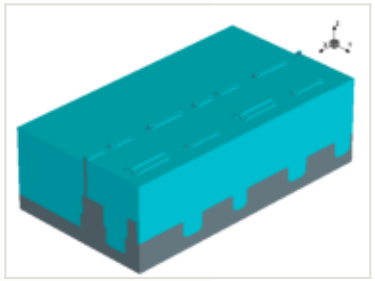

x cut at -0.570 µm

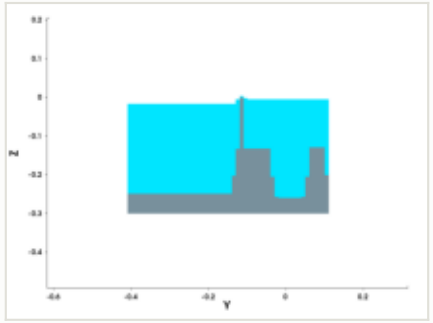

y cut at -0.150 µm

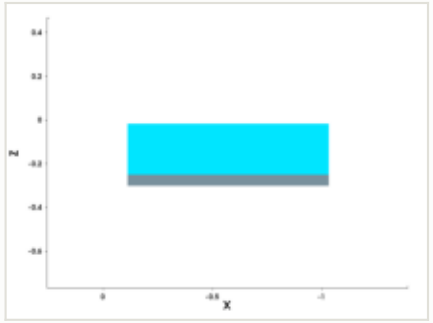

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

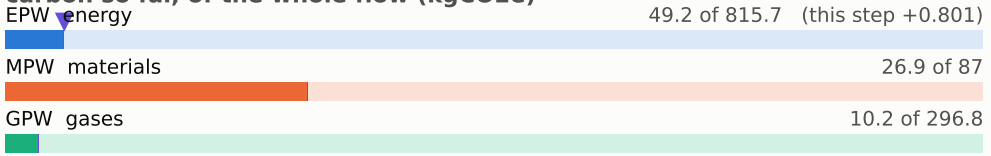

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

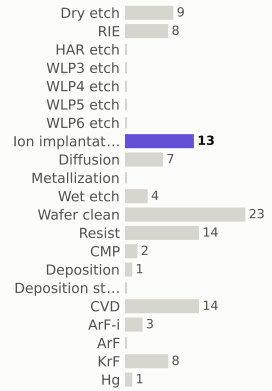

materials deposited (g)

gases emitted (g)

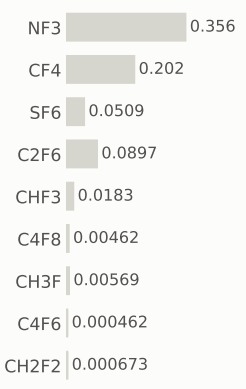

Step #1350: Dry_etch

etch_strip · Dry_etch

0.801	87	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

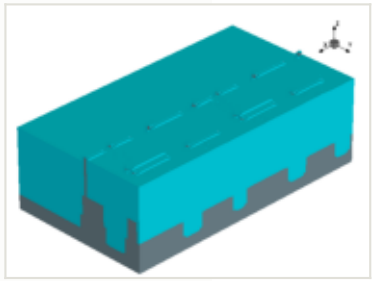

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

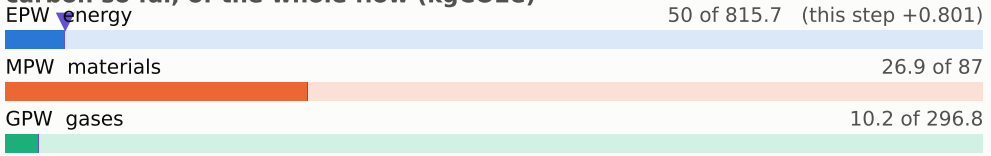

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

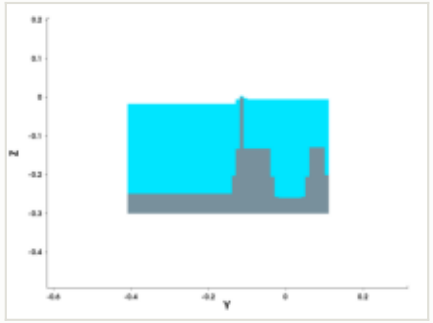

y cut at -0.150 µm

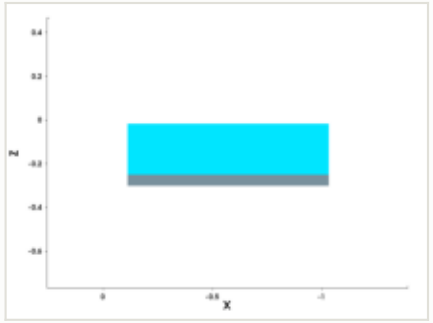

mask for this step

no mask for this step

steps by process area

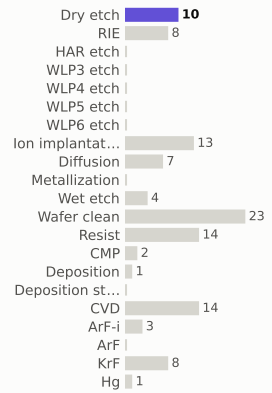

materials deposited (g)

gases emitted (g)

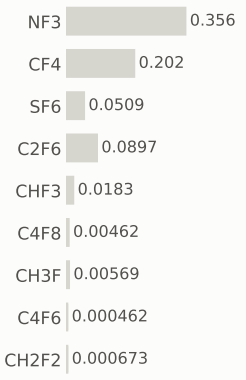

Step #1360: Wafer_clean

clean · Wafer_clean

0.169	87.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

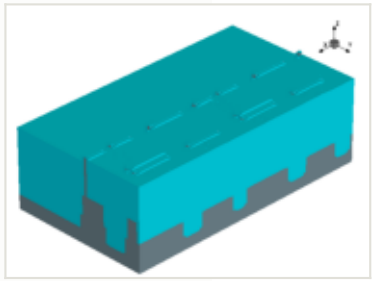

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

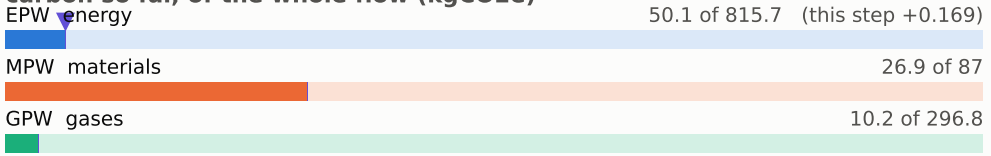

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

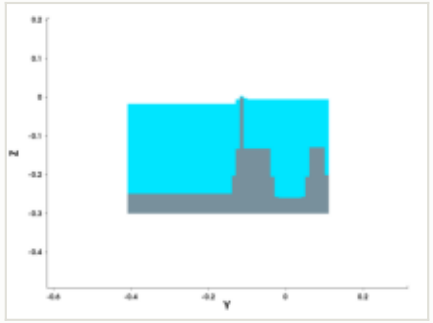

y cut at -0.150 µm

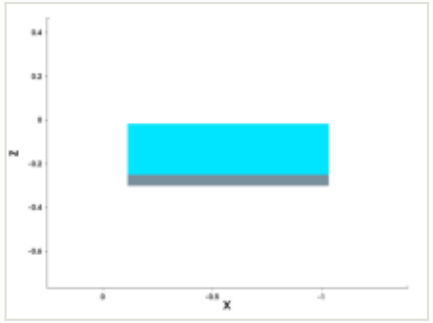

mask for this step

no mask for this step

steps by process area

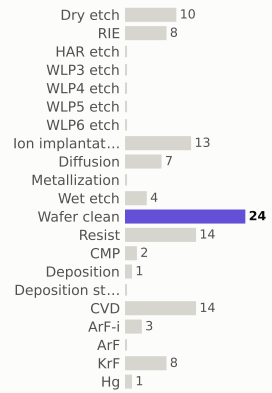

materials deposited (g)

gases emitted (g)

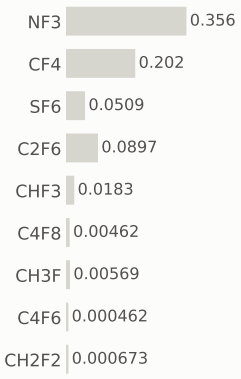

Step #1370: Resist

resist · Resist

0.169	87.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

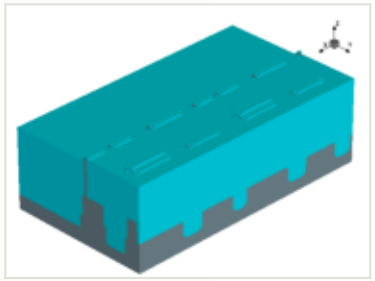

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

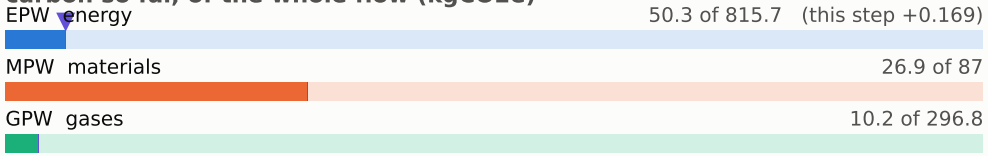

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

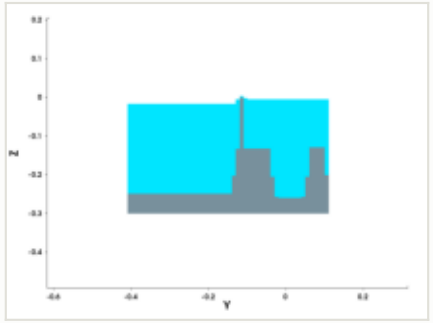

y cut at -0.150 µm

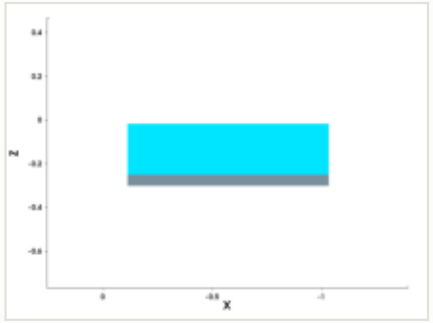

mask for this step

no mask for this step

steps by process area

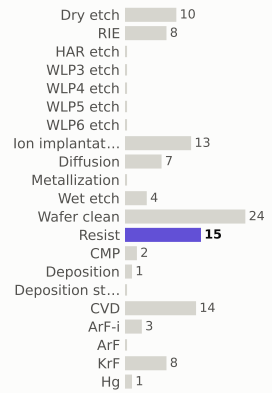

materials deposited (g)



gases emitted (g)

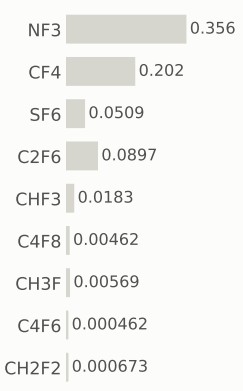

Step #1380: KrF

litho_patterning · KrF

0.199	87.6	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

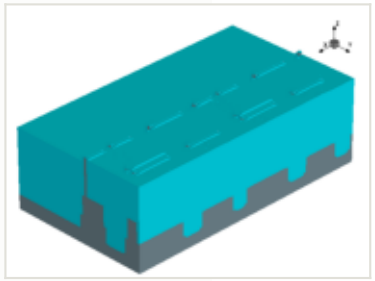

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

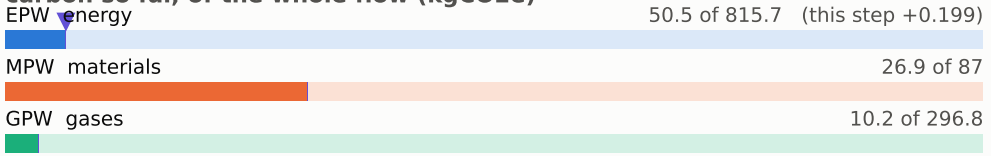

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

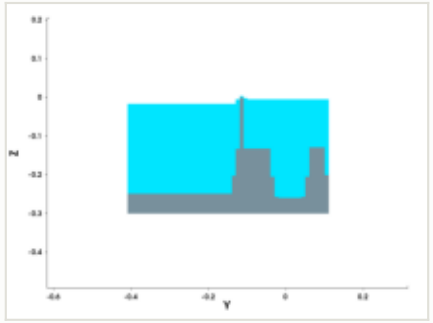

y cut at -0.150 µm

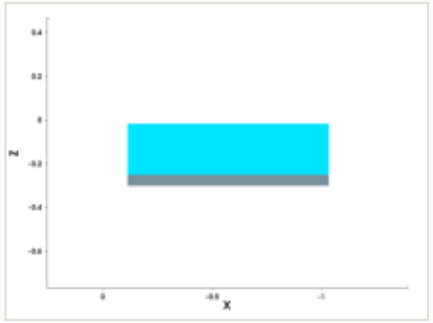

mask: layer 2100:0, positive (GDSII)

steps by process area

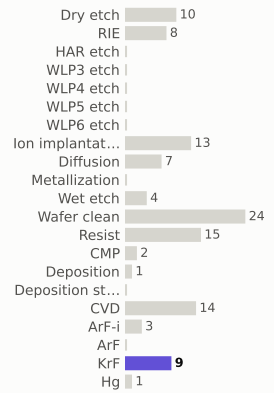

materials deposited (g)

gases emitted (g)

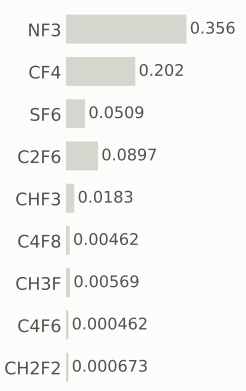

Step #1390: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	88.4	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

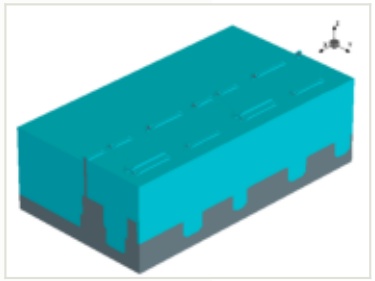

x cut at -0.570 µm

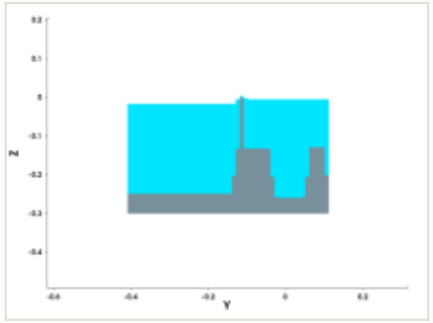

y cut at -0.150 µm

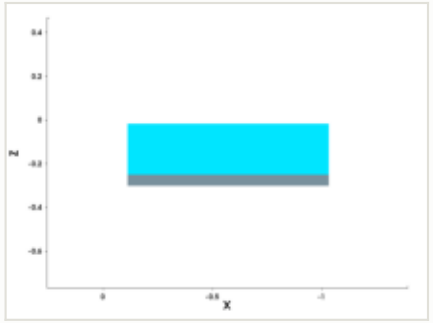

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

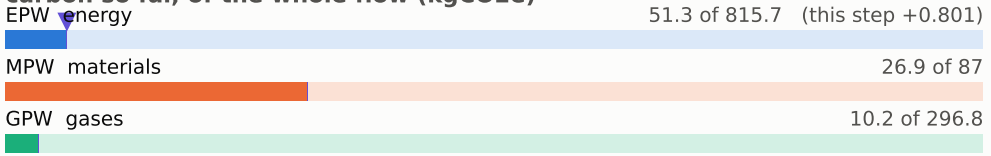

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

gases emitted (g)

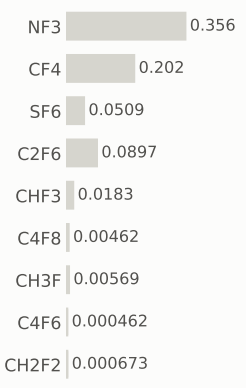

Step #1400: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	89.2	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

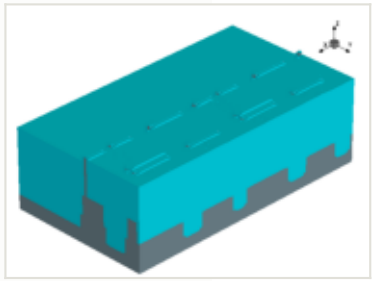

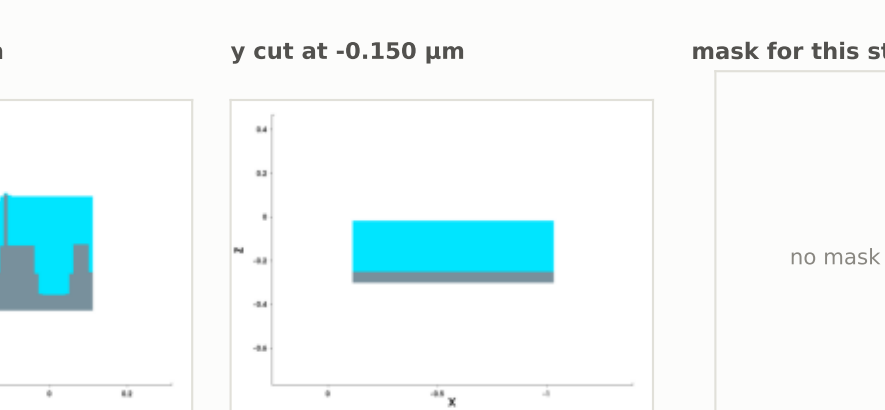

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

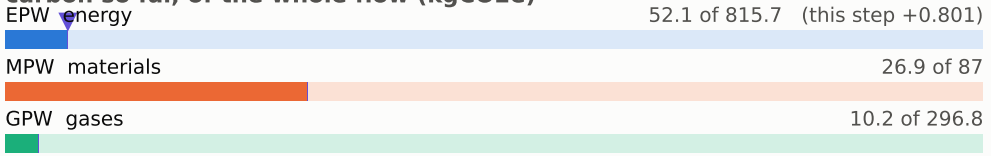

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

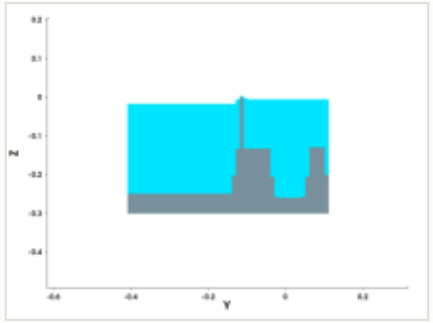

y cut at -0.150 µm

mask for this step

no mask for this step

steps by process area

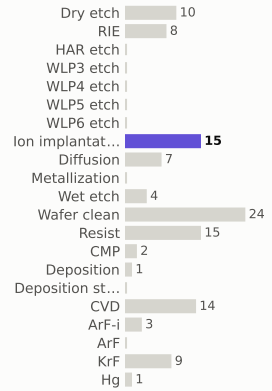

materials deposited (g)

gases emitted (g)

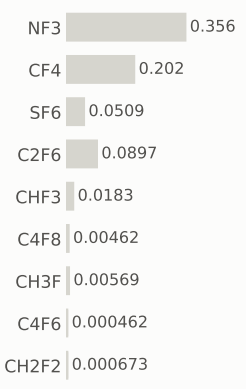

Step #1410: Dry_etch

etch_strip · Dry_etch

0.801	90	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

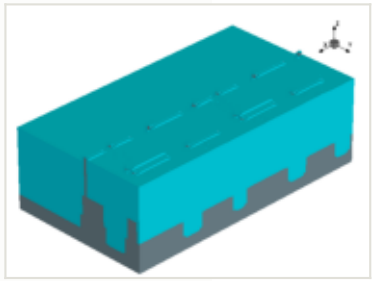

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

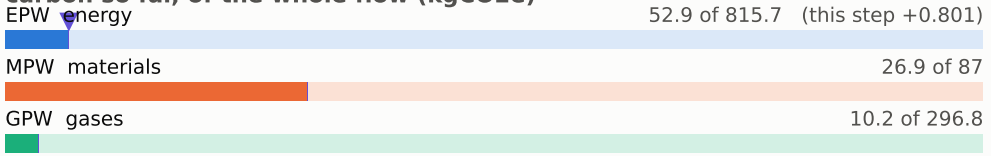

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

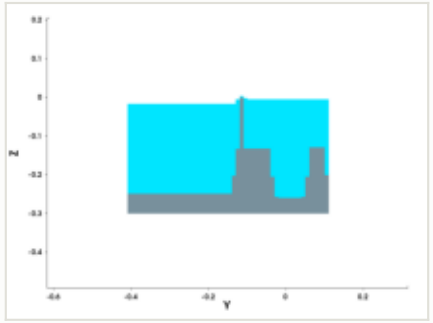

y cut at -0.150 µm

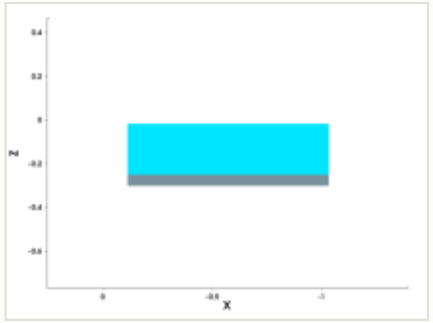

mask for this step

no mask for this step

steps by process area

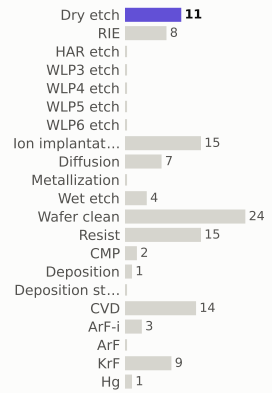

materials deposited (g)

gases emitted (g)

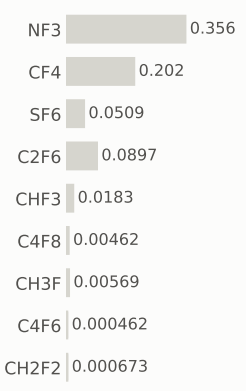

Step #1420: Wafer_clean

clean · Wafer_clean

0.169	90.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

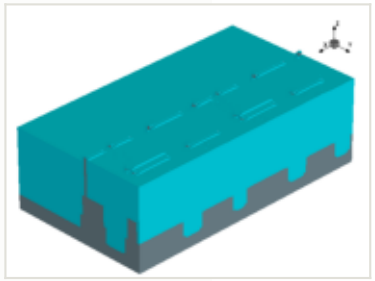

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

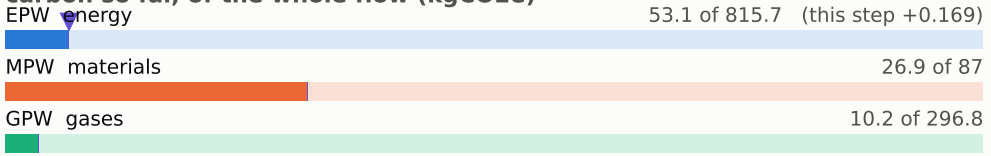

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

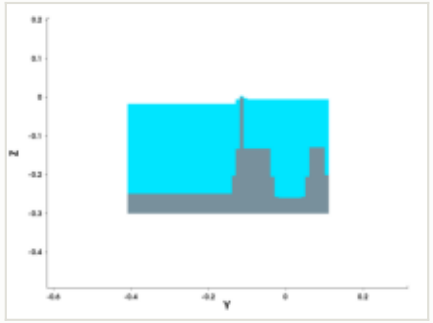

y cut at -0.150 µm

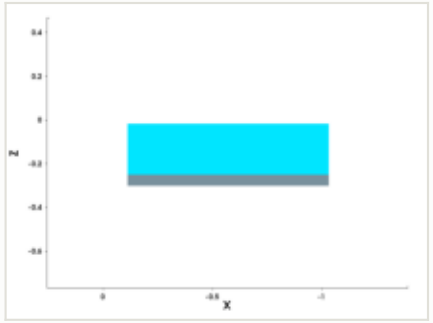

mask for this step

no mask for this step

steps by process area

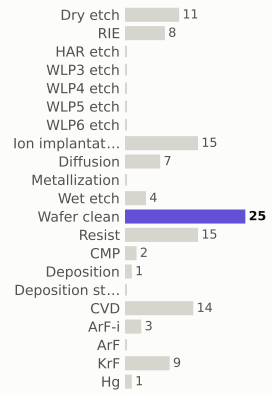

materials deposited (g)

gases emitted (g)

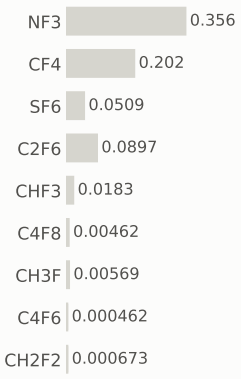

Step #1430: Resist

resist · Resist

0.169	90.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

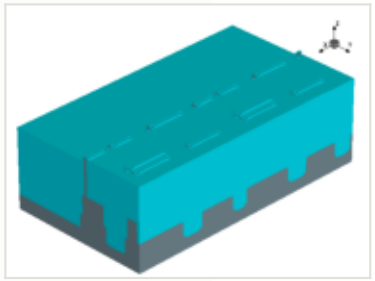

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

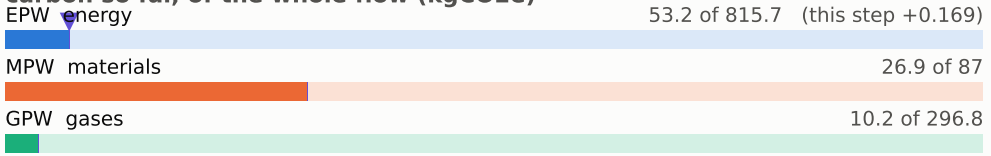

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

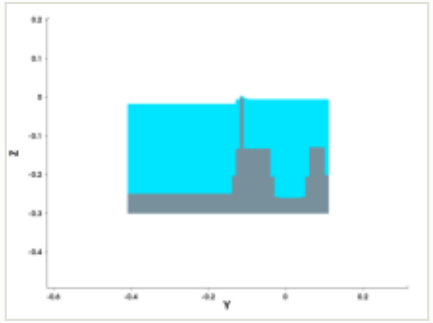

y cut at -0.150 µm

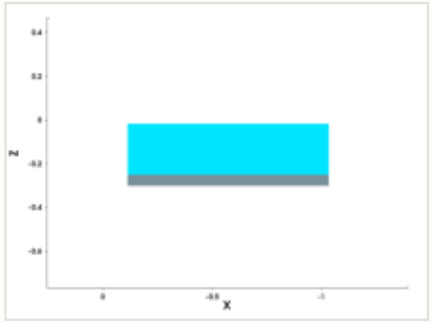

mask for this step

no mask for this step

steps by process area

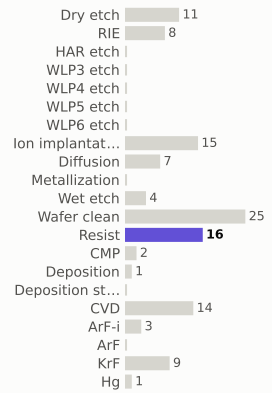

materials deposited (g)

gases emitted (g)

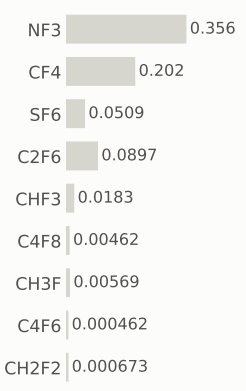

Step #1440: KrF

litho_patterning · KrF

0.199	90.5	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

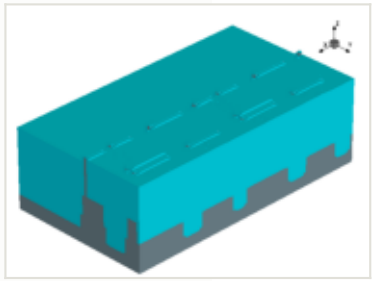

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

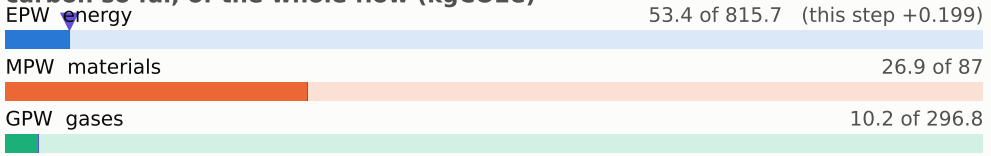

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

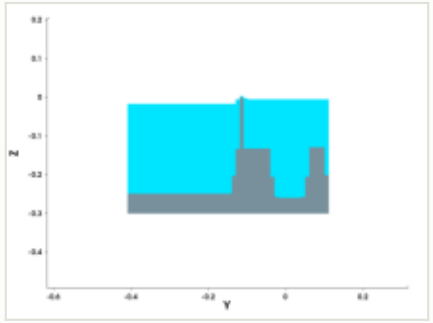

y cut at -0.150 µm

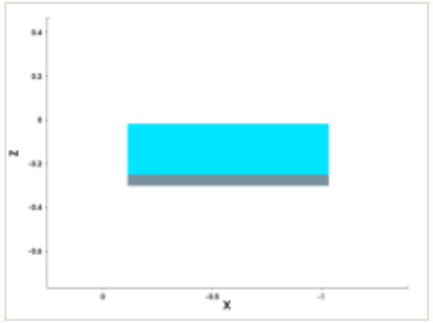

mask: layer 2100:0, positive (GDSII)

steps by process area

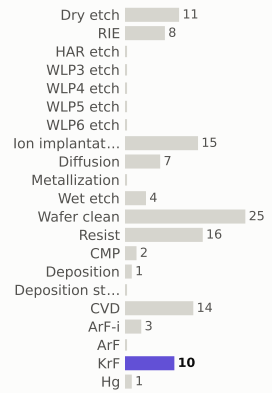

materials deposited (g)

gases emitted (g)

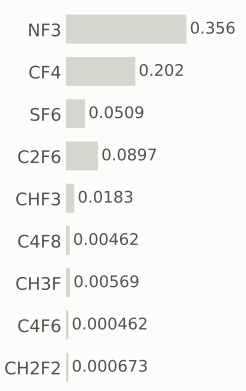

Step #1450: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	91.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

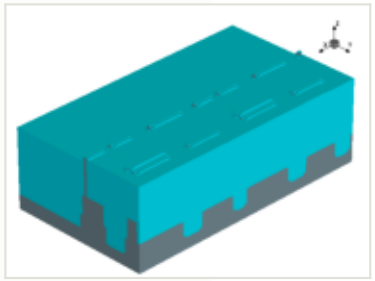

x cut at -0.570 µm

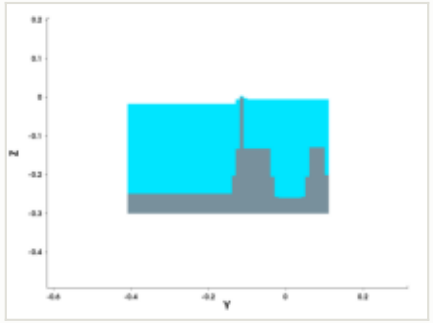

y cut at -0.150 µm

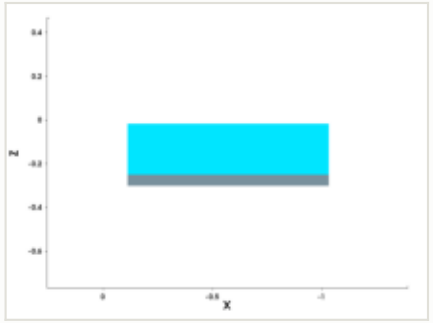

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

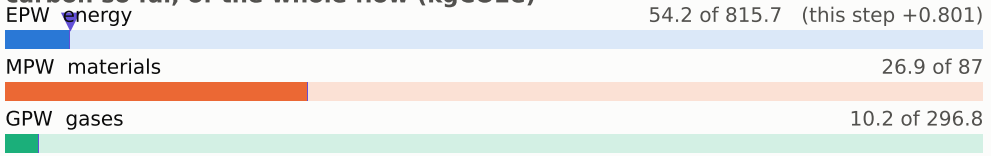

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

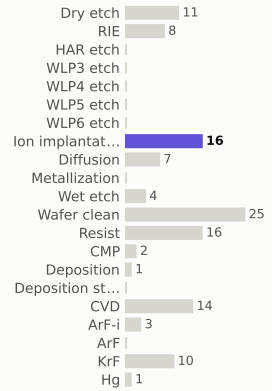

materials deposited (g)

gases emitted (g)

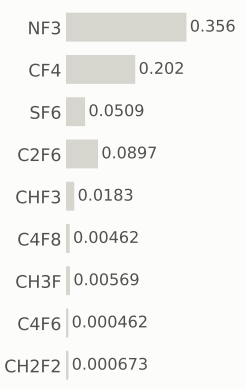

Step #1460: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	92.1	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

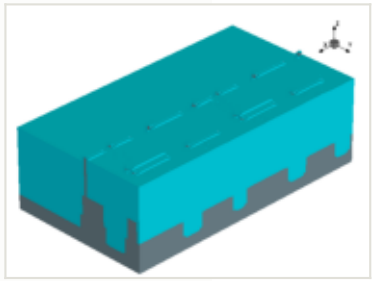

x cut at -0.570 µm

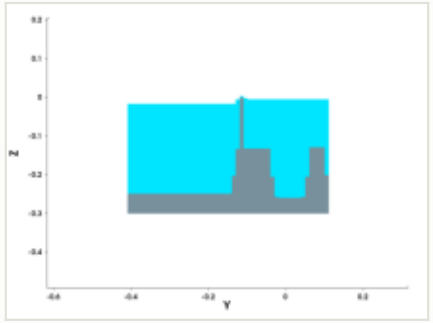

y cut at -0.150 µm

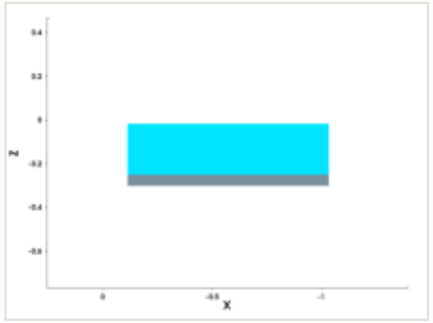

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

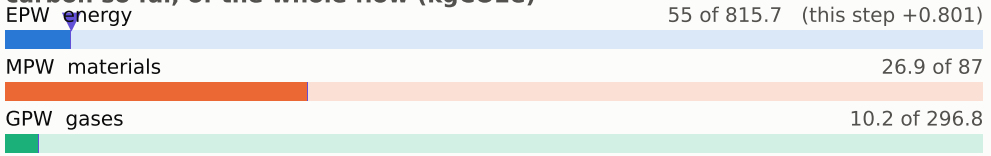

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

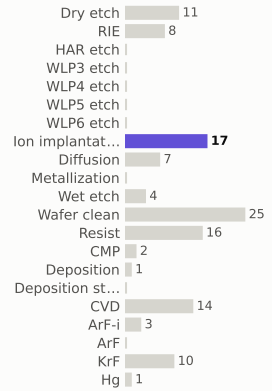

materials deposited (g)

gases emitted (g)

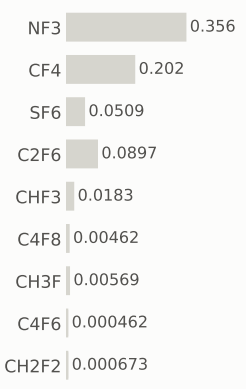

Step #1470: Dry_etch

etch_strip · Dry_etch

0.801	92.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

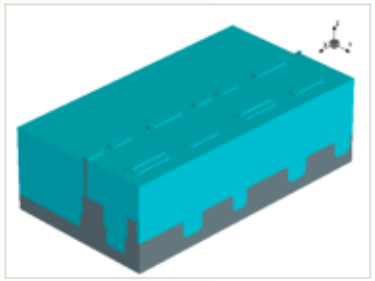

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

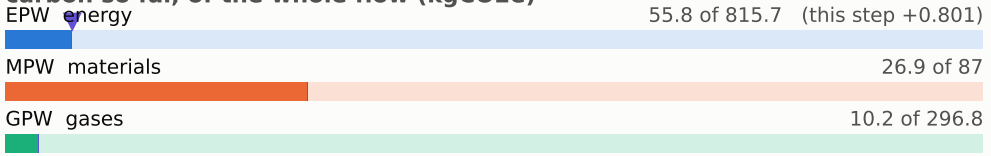

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

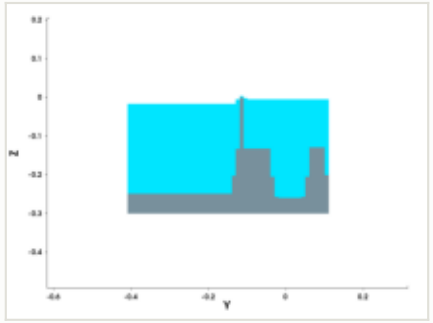

y cut at -0.150 µm

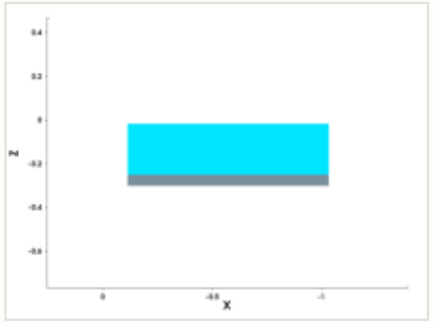

mask for this step

no mask for this step

steps by process area

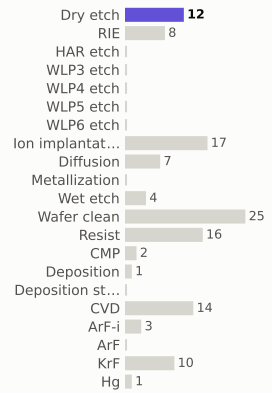

materials deposited (g)

gases emitted (g)

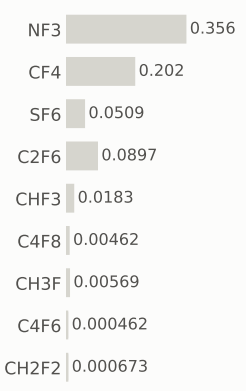

Step #1480: Wafer_clean

clean · Wafer_clean

0.169	93.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

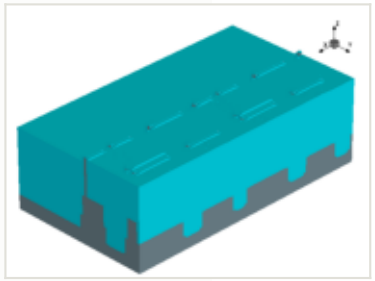

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

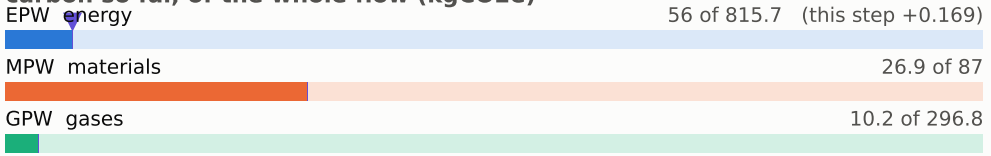

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

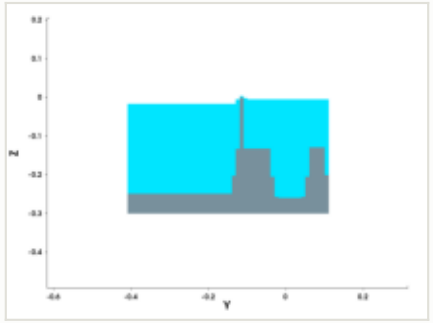

y cut at -0.150 µm

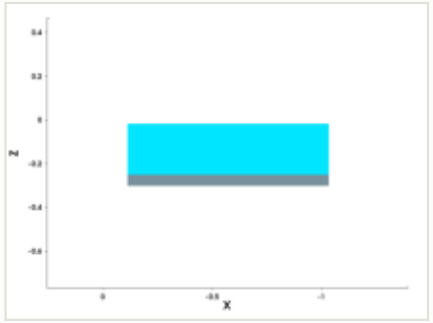

mask for this step

no mask for this step

steps by process area

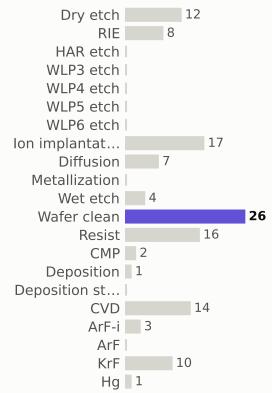

materials deposited (g)



gases emitted (g)

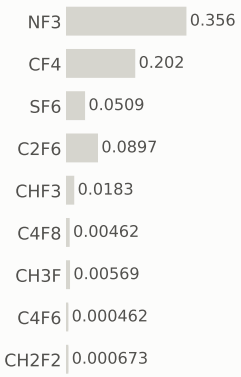

Step #1490: Diffusion

anneal · Diffusion

0.801	93.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

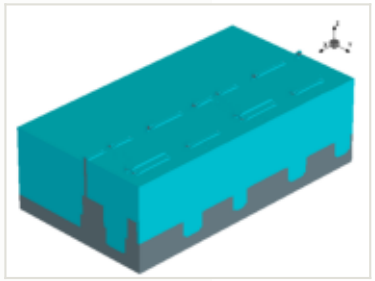

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

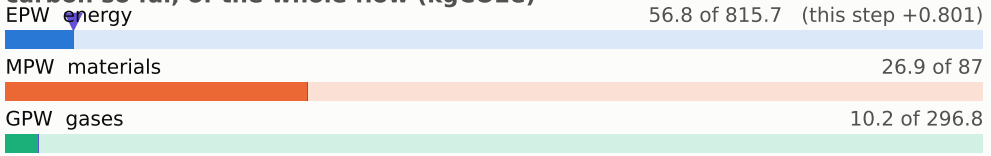

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

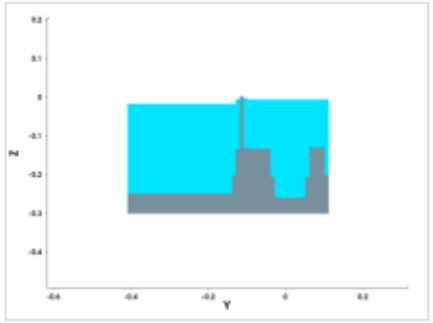

y cut at -0.150 µm

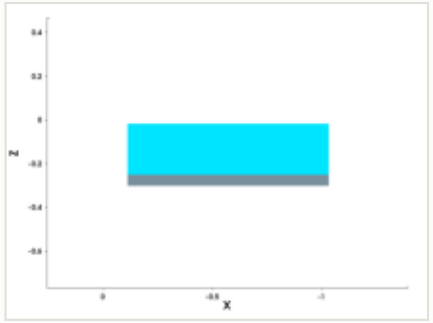

mask for this step

no mask for this step

steps by process area

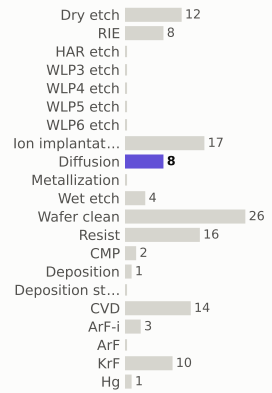

materials deposited (g)

gases emitted (g)

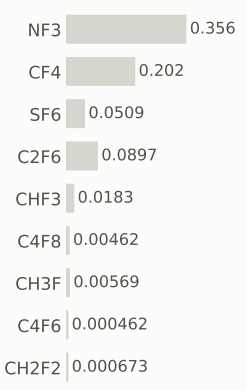

Step #1500: Dry_etch

etch_isotropic · Dry_etch

0.801	94.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

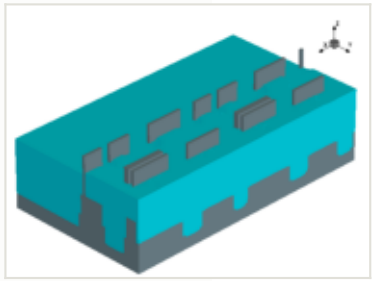

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

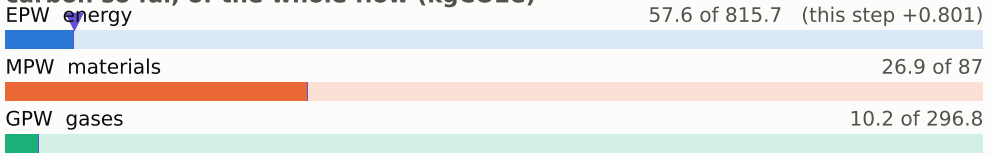

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

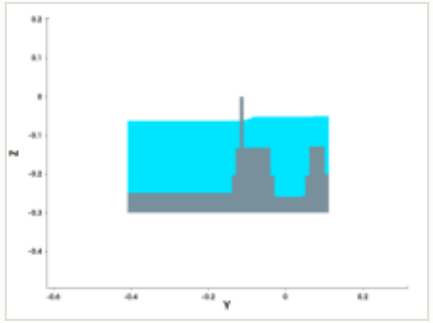

y cut at -0.150 µm

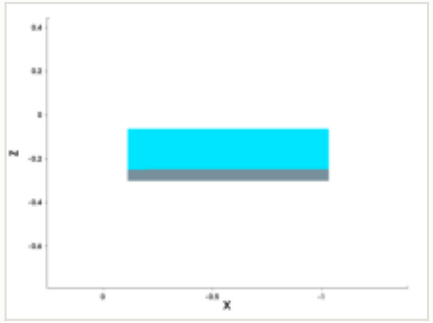

mask for this step

no mask for this step

steps by process area

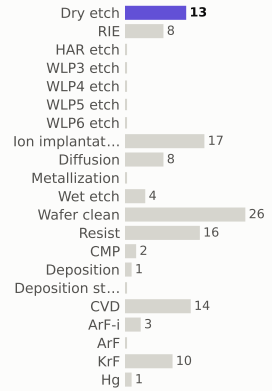

materials deposited (g)

gases emitted (g)

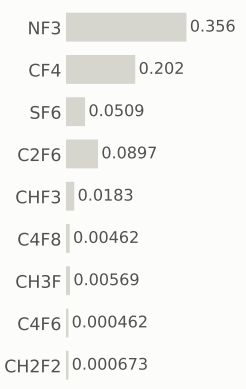

Step #1510: Spx_only

etch_isotropic · Spx_only

0	94.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

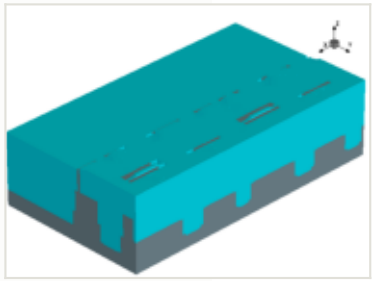

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 57.6 of 815.7

MPW materials 26.9 of 87

GPW gases 10.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

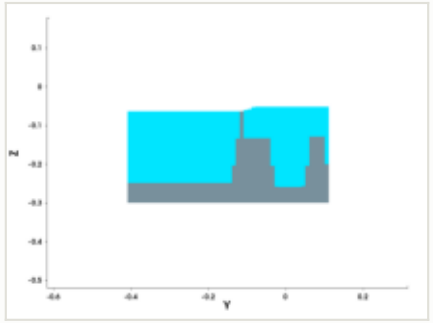

y cut at -0.150 µm

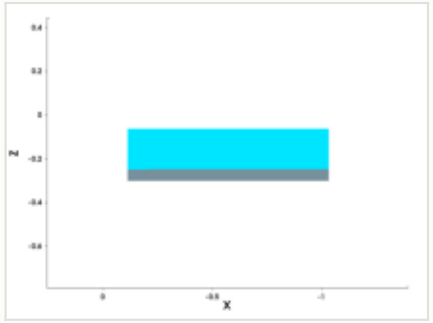

mask for this step

no mask for this step

steps by process area

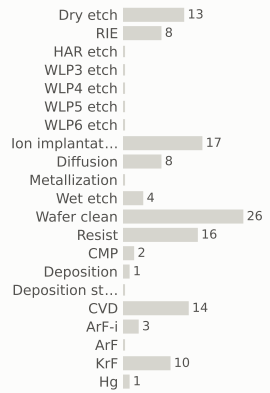

materials deposited (g)

gases emitted (g)

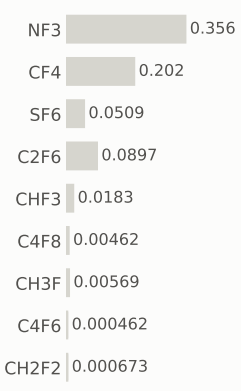

Step #1520: Wafer_clean

clean · Wafer_clean

0.169	94.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

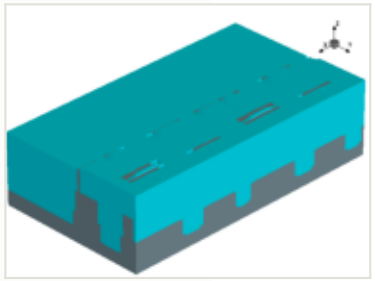

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

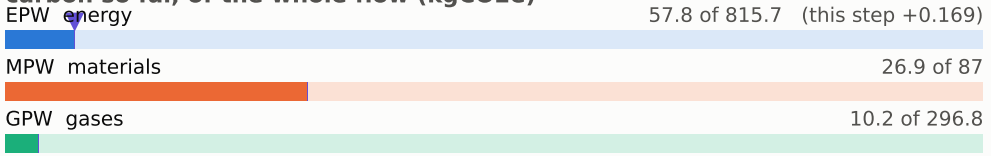

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

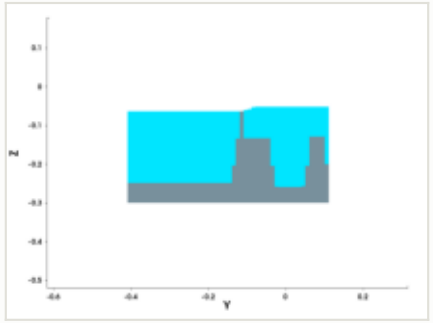

y cut at -0.150 µm

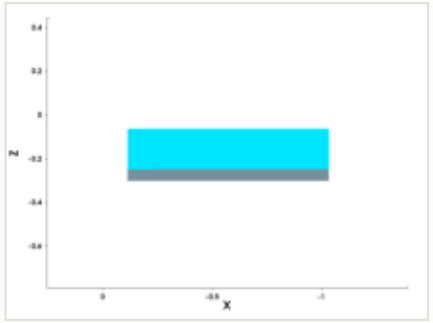

mask for this step

no mask for this step

steps by process area

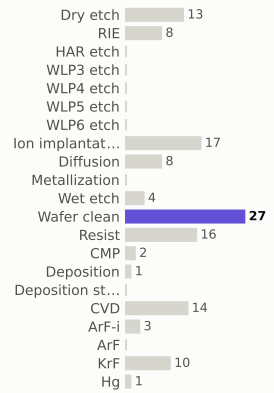

materials deposited (g)

gases emitted (g)

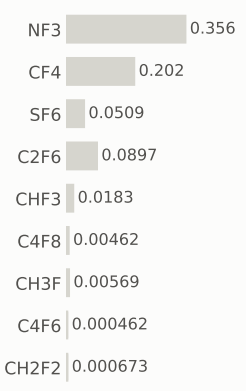

Step #1530: Diffusion

depo_isotropic · Diffusion

0.801	95.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

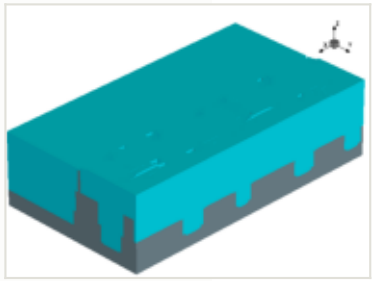

this step

process area	Diffusion
material	—
thickness	0.0034 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

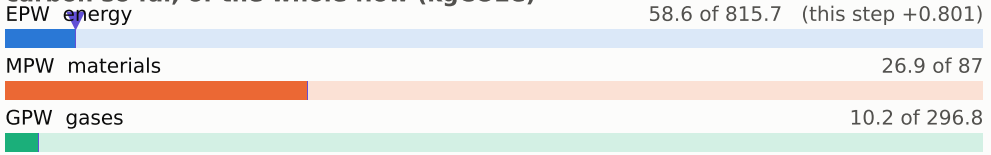

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

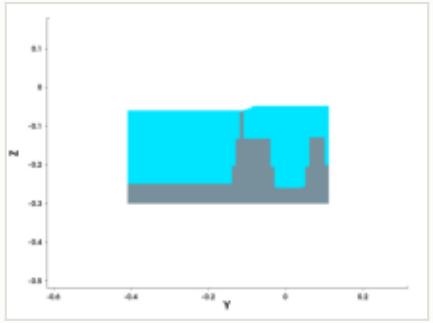

y cut at -0.150 µm

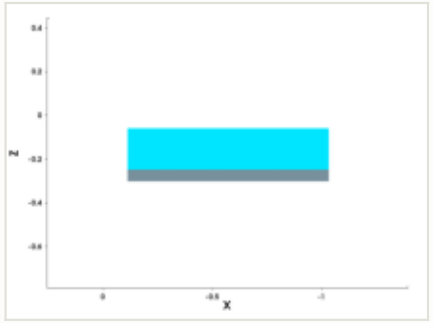

mask for this step

no mask for this step

steps by process area

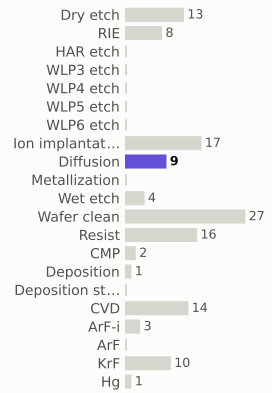

materials deposited (g)



gases emitted (g)

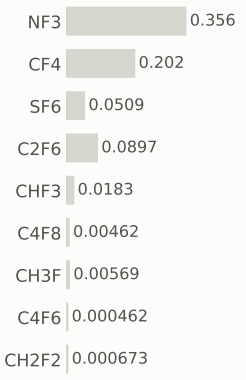

Step #1540: Dry_etch

etch_isotropic · Dry_etch

0.801	96.5	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

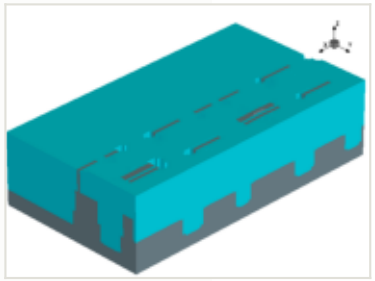

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

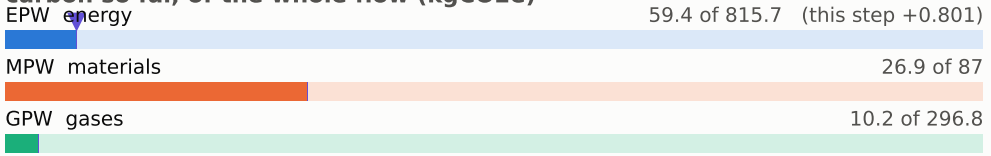

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

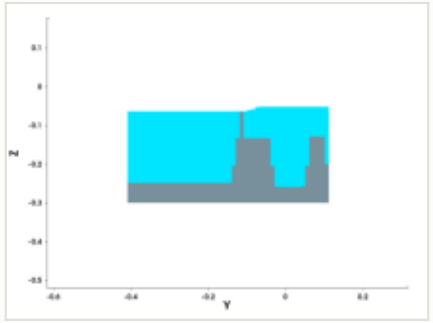

y cut at -0.150 µm

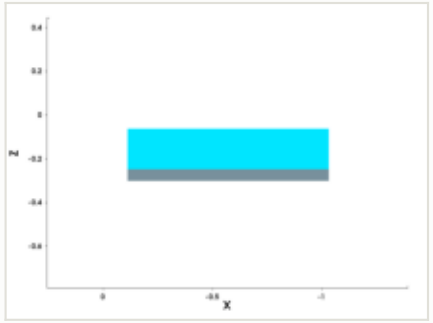

mask for this step

no mask for this step

steps by process area

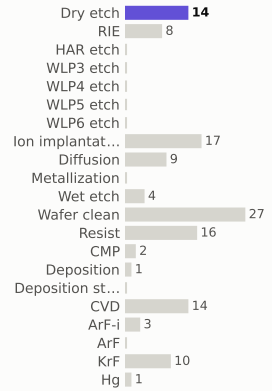

materials deposited (g)

gases emitted (g)

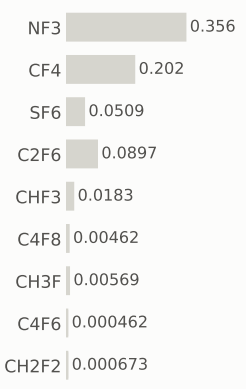

Step #1560: Diffusion

depo_isotropic · Diffusion

0.801	97.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

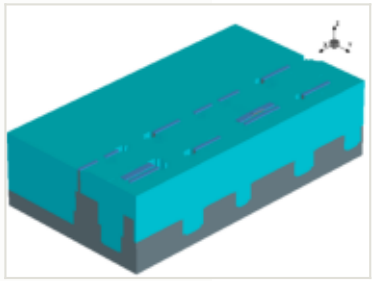

this step

process area	Diffusion
material	—
thickness	0.0034 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

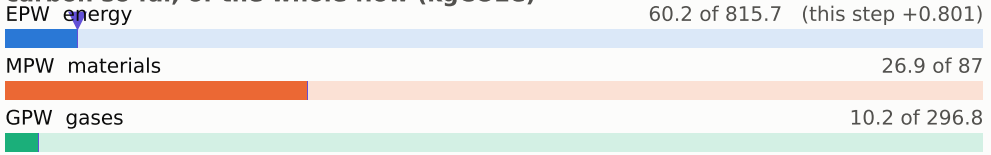

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

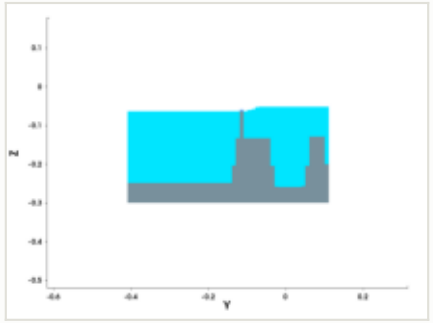

y cut at -0.150 µm

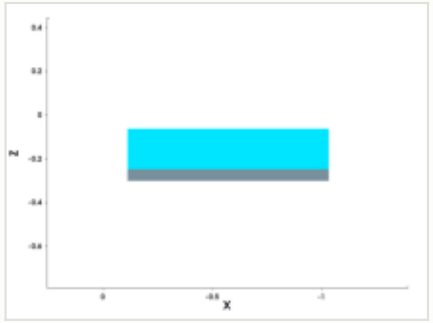

mask for this step

no mask for this step

steps by process area

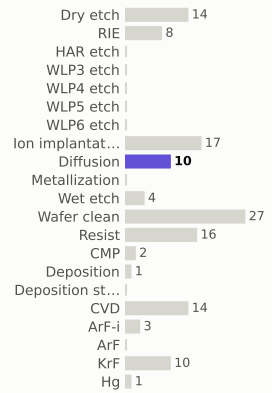

materials deposited (g)

gases emitted (g)

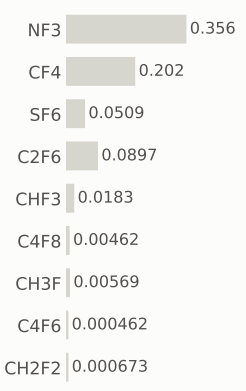

Step #1570: Spx_only

etch_isotropic · Spx_only

0	97.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

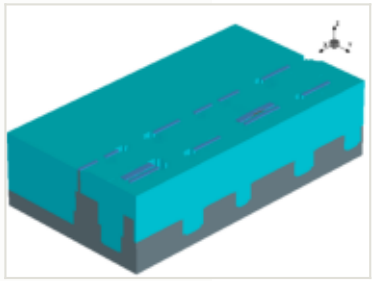

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 60.2 of 815.7

MPW materials 26.9 of 87

GPW gases 10.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

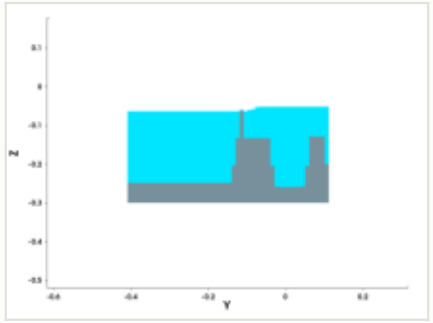

y cut at -0.150 µm

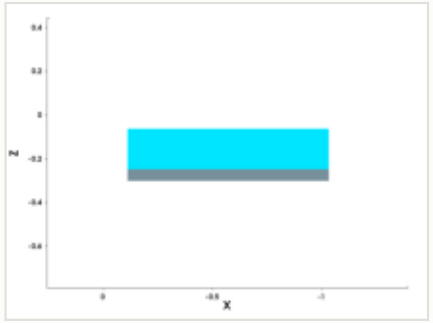

mask for this step

no mask for this step

steps by process area

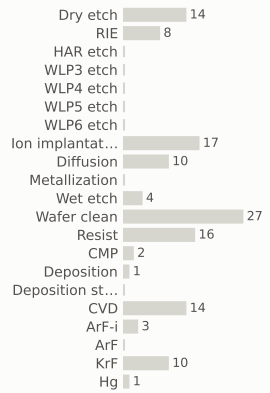

materials deposited (g)

gases emitted (g)

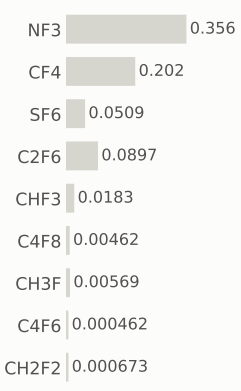

Step #1580: Spx_only

depo_isotropic · Spx_only

0	97.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

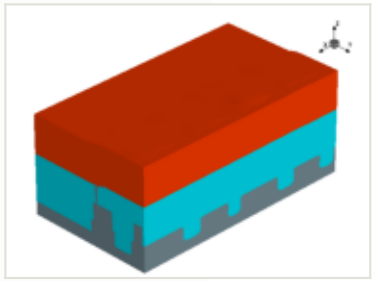

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.15 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 60.2 of 815.7

MPW materials 26.9 of 87

GPW gases 10.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

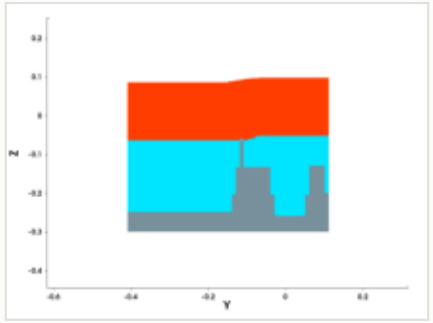

y cut at -0.150 µm

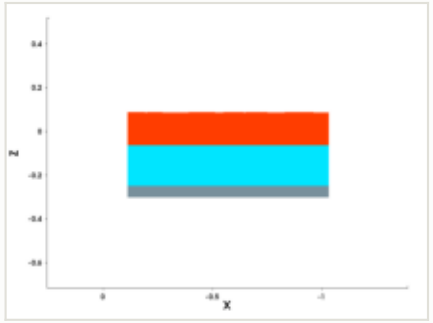

mask for this step

no mask for this step

steps by process area

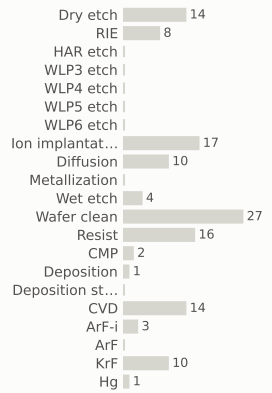

materials deposited (g)

gases emitted (g)

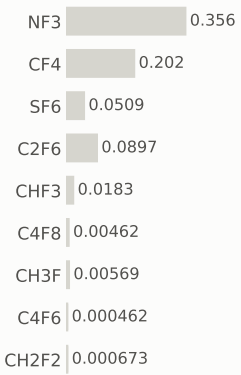

Step #1590: Diffusion

implant_ellipsoid · Diffusion

0.801	98.1	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

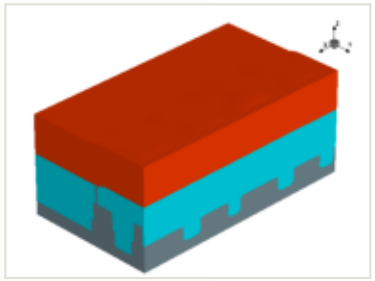

x cut at -0.570 µm

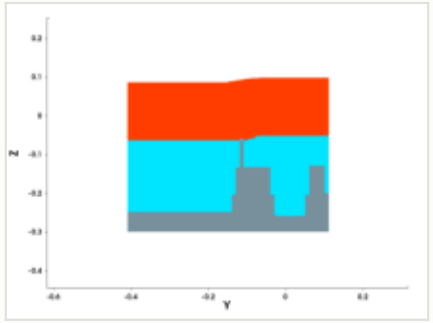

y cut at -0.150 µm

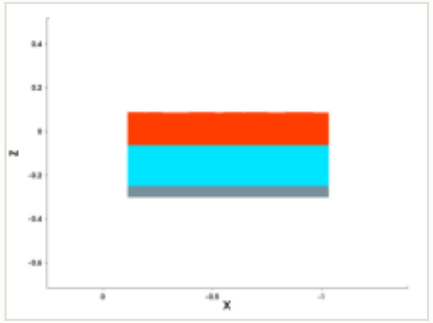

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

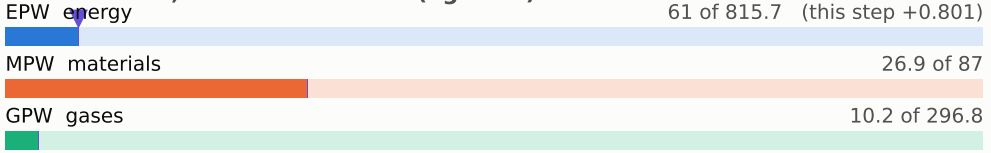

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

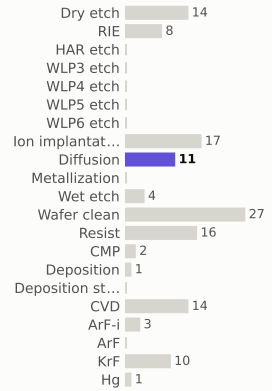

materials deposited (g)

gases emitted (g)

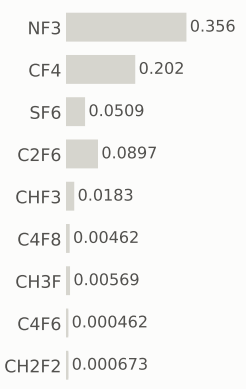

Step #1600: CVD

depo_isotropic · CVD

1.31	99.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

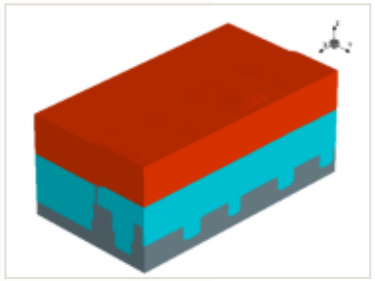

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

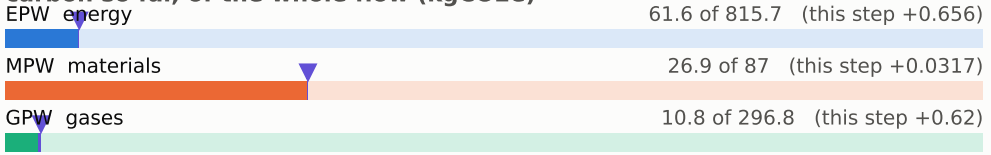

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

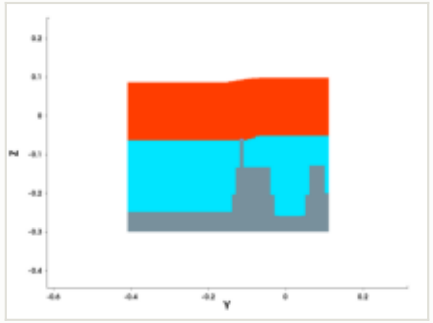

y cut at -0.150 µm

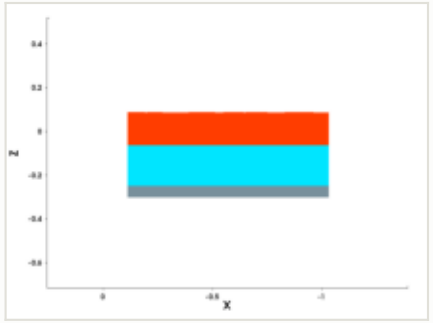

mask for this step

no mask for this step

steps by process area

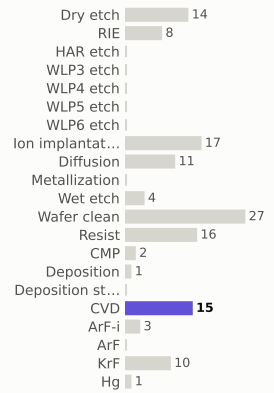

materials deposited (g)

gases emitted (g)

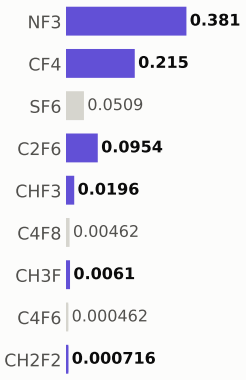

Step #1610: Wet_etch

etch_isotropic · Wet_etch

0.169	99.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

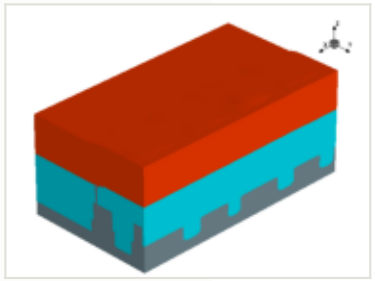

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

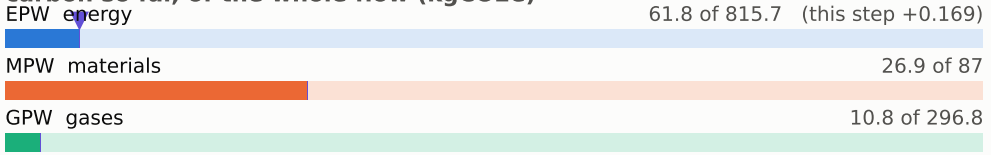

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

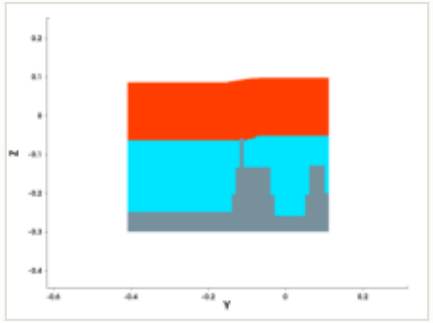

y cut at -0.150 µm

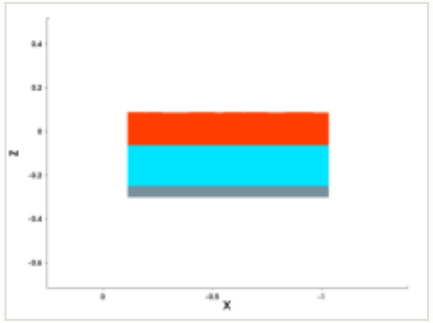

mask for this step

no mask for this step

steps by process area

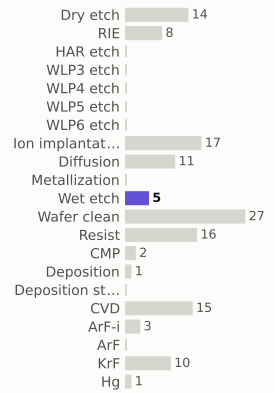

materials deposited (g)

gases emitted (g)

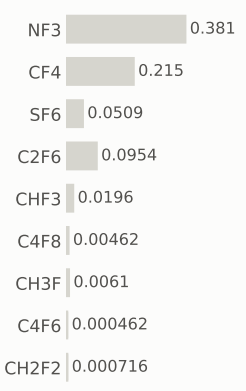

Step #1620: CMP

etch_cmp · CMP

0.169	99.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

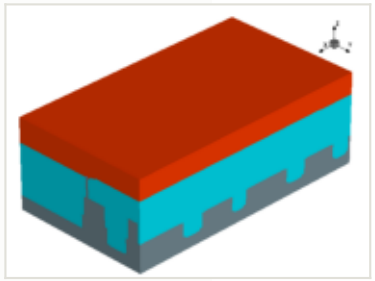

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

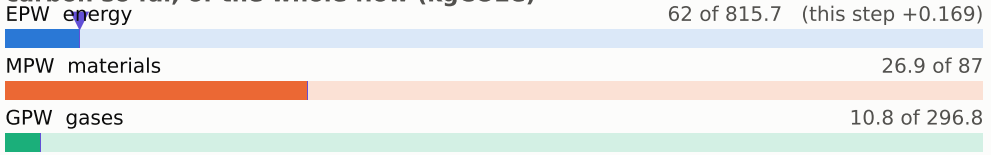

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

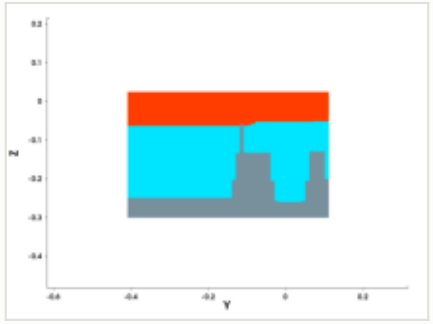

y cut at -0.150 µm

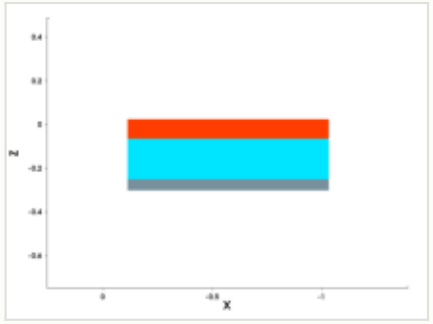

mask for this step

no mask for this step

steps by process area

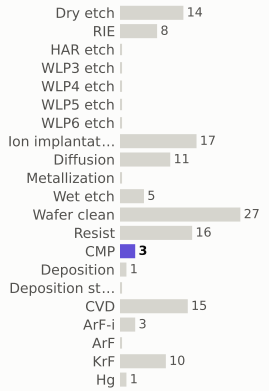

materials deposited (g)

gases emitted (g)

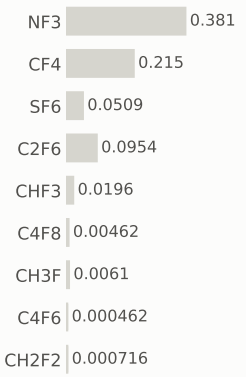

Step #1630: Spx_only

depo_isotropic · Spx_only

0	99.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

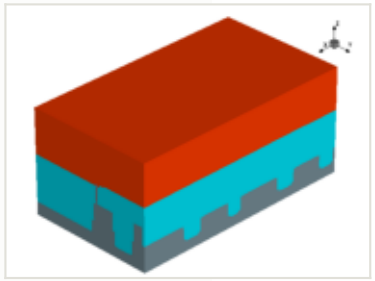

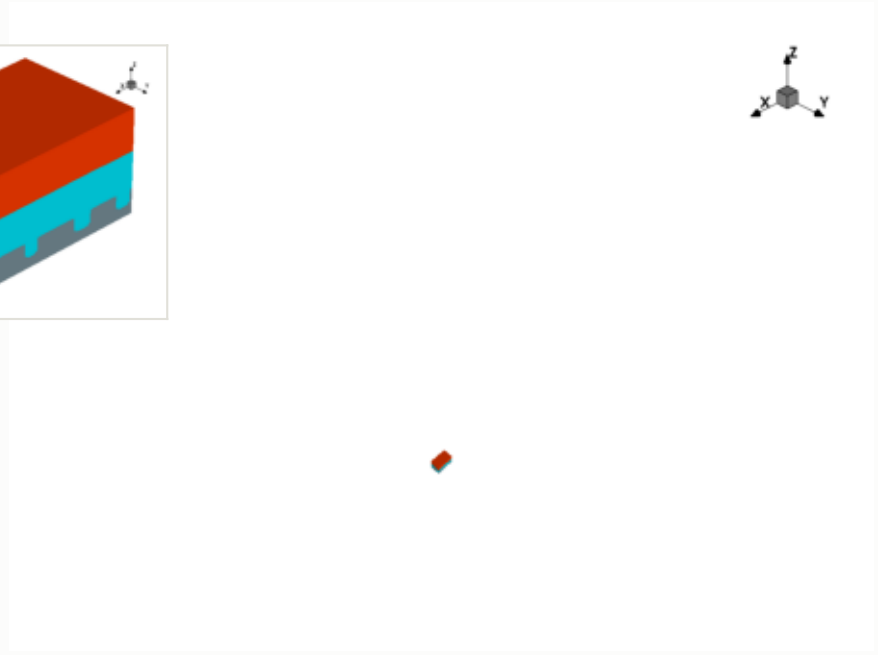

x cut at -0.570 µm

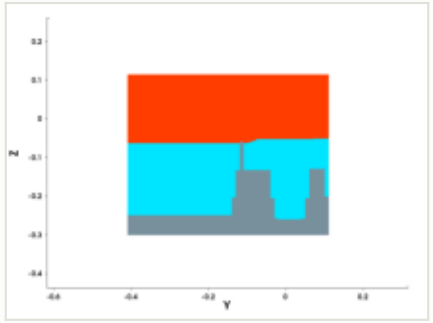

y cut at -0.150 µm

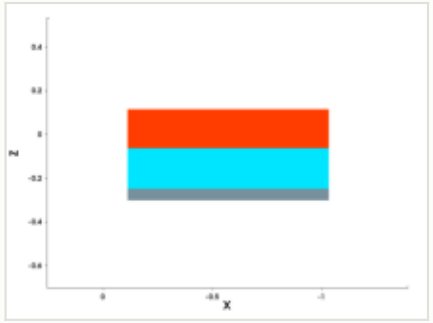

mask for this step

no mask for this step

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.09 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

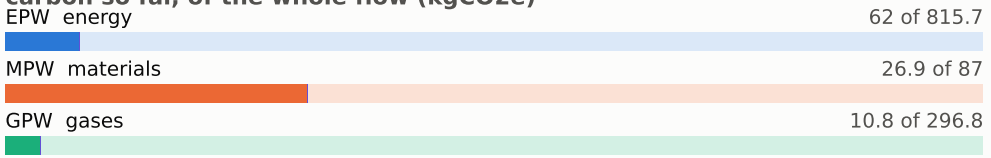

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

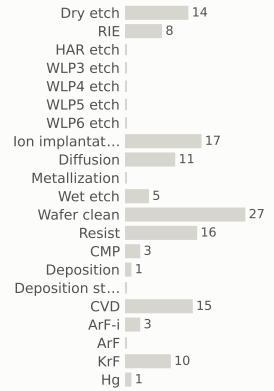

materials deposited (g)

gases emitted (g)

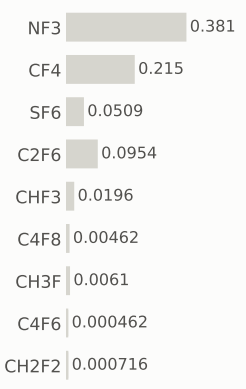

Step #1640: Wafer_clean

clean · Wafer_clean

0.169	99.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

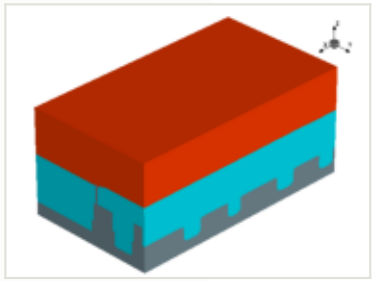

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

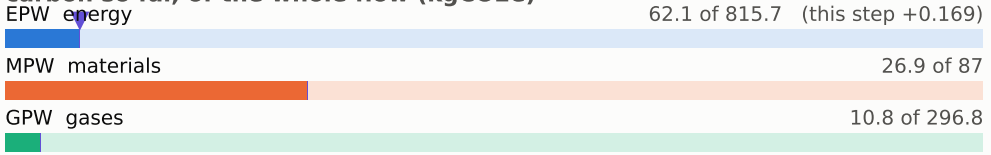

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

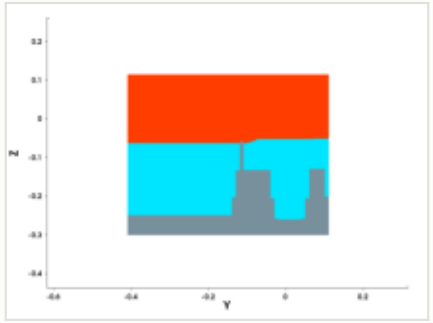

y cut at -0.150 µm

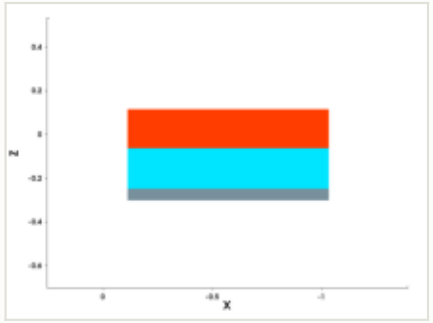

mask for this step

no mask for this step

steps by process area

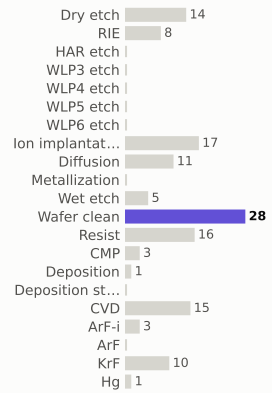

materials deposited (g)



gases emitted (g)



Step #1650: CVD

depo_isotropic · CVD

1.31	101.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

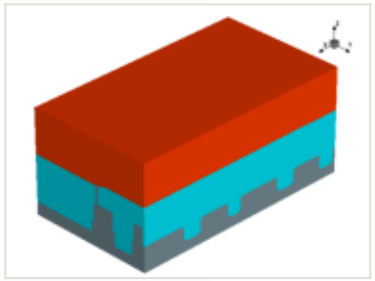

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 62.8 of 815.7 (this step +0.656)

MPW materials — 27 of 87 (this step +0.0317)

GPW gases — 11.4 of 296.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

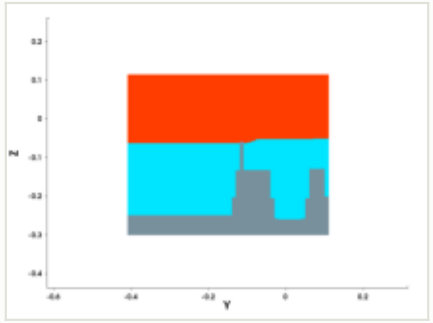

y cut at -0.150 µm

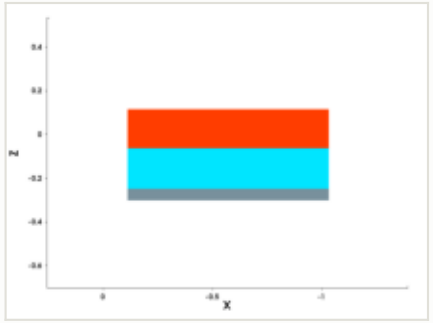

mask for this step

no mask for this step

steps by process area

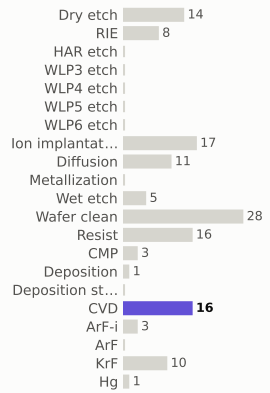

materials deposited (g)

gases emitted (g)

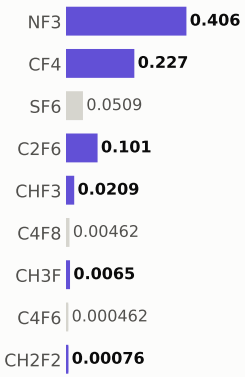

Step #1660: Wet_etch

etch_isotropic · Wet_etch

0.169	101.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

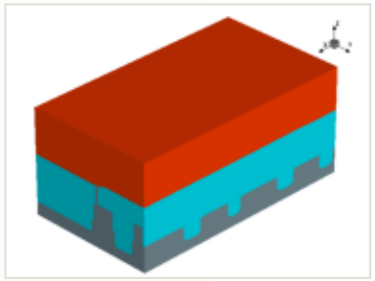

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

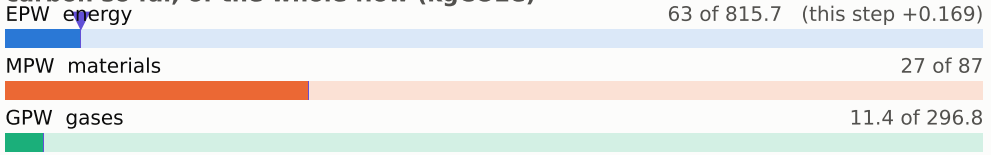

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

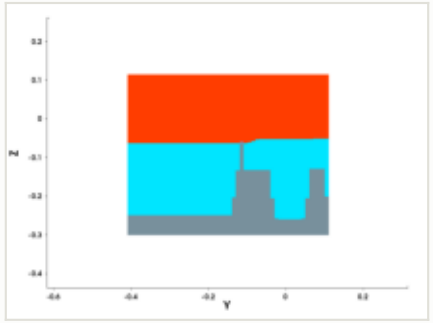

y cut at -0.150 µm

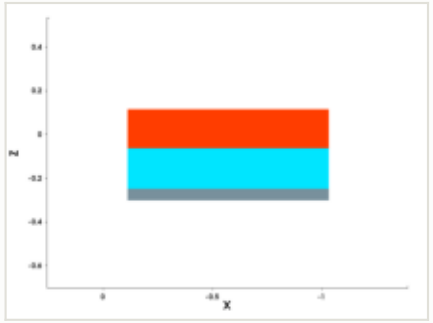

mask for this step

no mask for this step

steps by process area

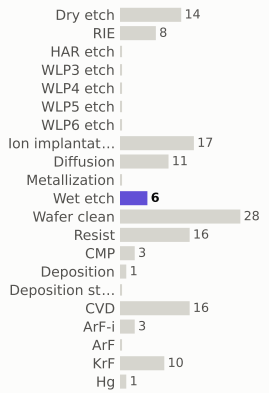

materials deposited (g)

gases emitted (g)

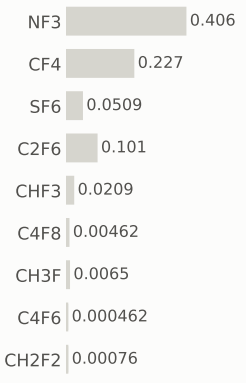

Step #1670: CMP

etch_cmp · CMP

0.169	101.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

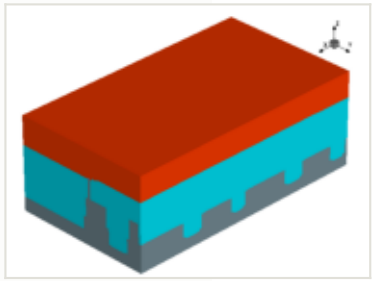

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

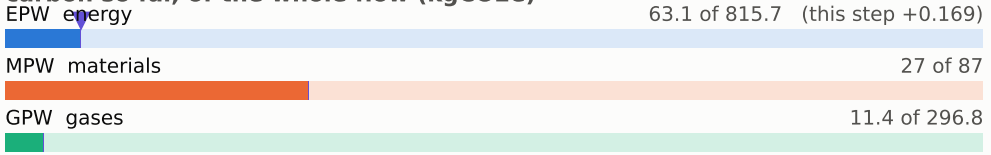

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

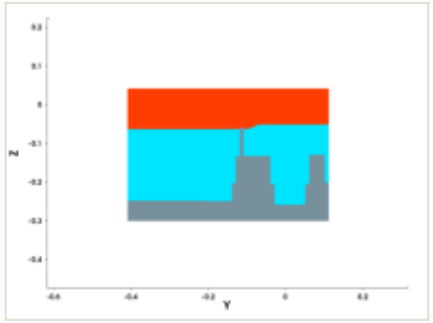

y cut at -0.150 µm

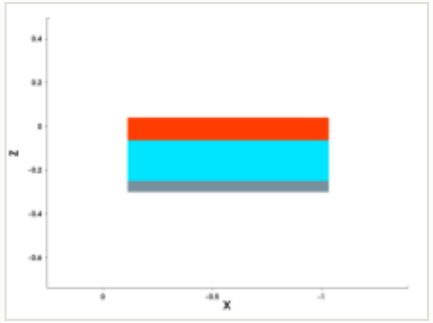

mask for this step

no mask for this step

steps by process area

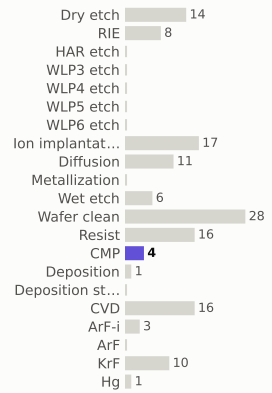

materials deposited (g)

gases emitted (g)

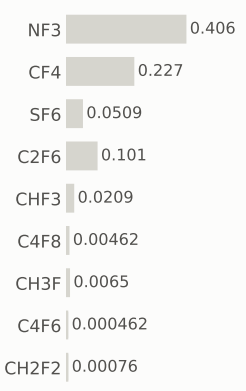

Step #1680: Wafer_clean

clean · Wafer_clean

0.169	101.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

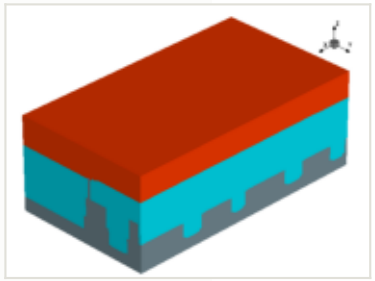

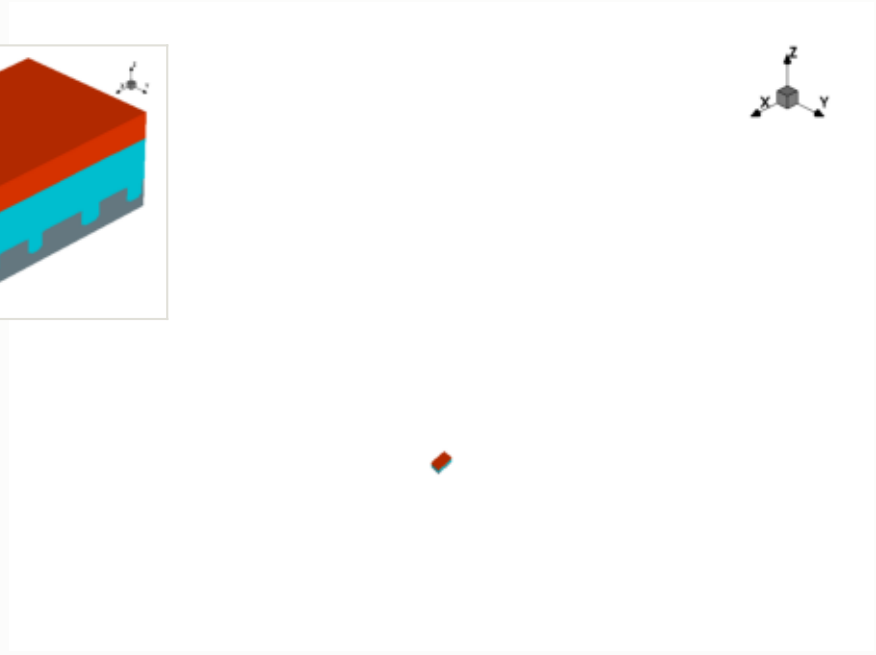

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

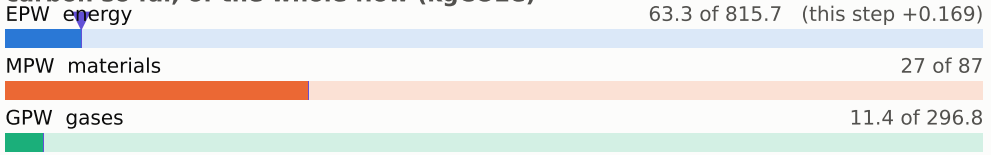

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

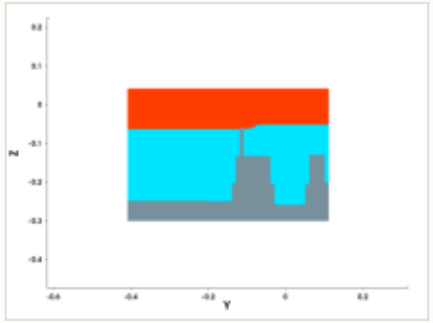

y cut at -0.150 µm

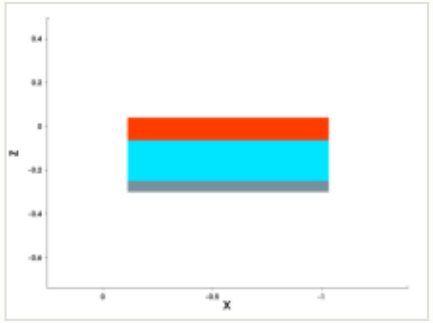

mask for this step

no mask for this step

steps by process area

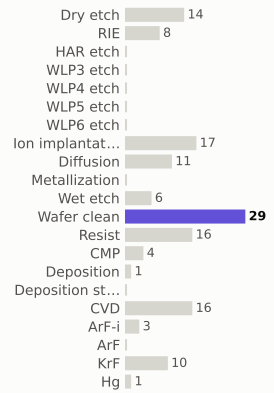

materials deposited (g)

gases emitted (g)

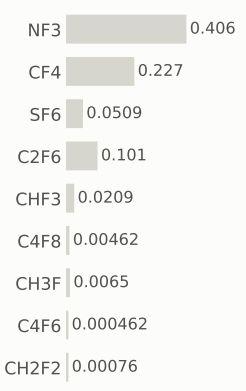

Step #1690: CVD

depo_isotropic · CVD

1.31	103.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

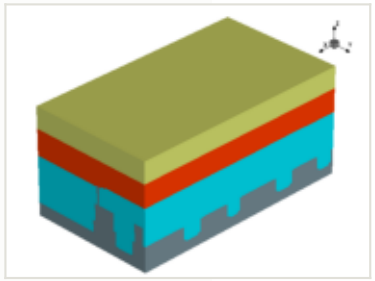

this step

process area	CVD
material	—
thickness	0.087 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 64 of 815.7 (this step +0.656)

MPW materials — 27 of 87 (this step +0.0317)

GPW gases — 12 of 296.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

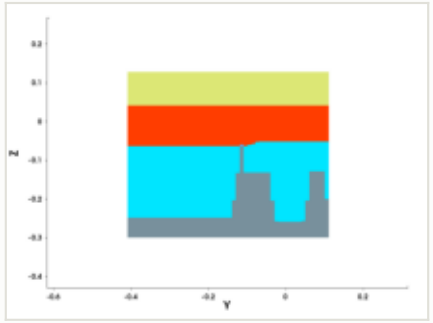

y cut at -0.150 µm

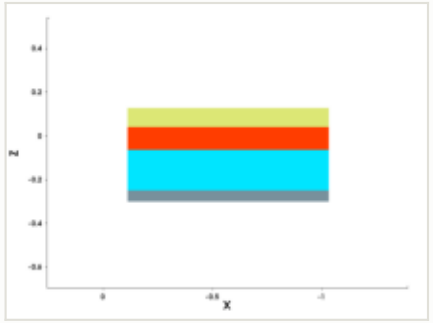

mask for this step

no mask for this step

steps by process area

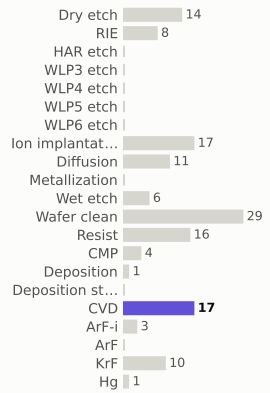

materials deposited (g)

gases emitted (g)

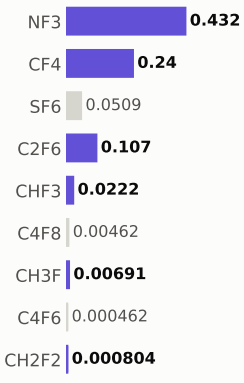

Step #1700: Wafer_clean

clean · Wafer_clean

0.169	103.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

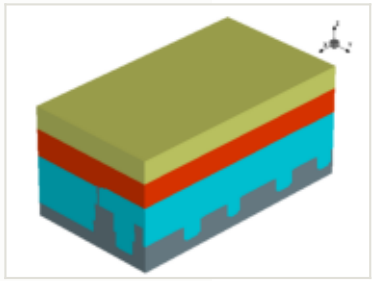

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

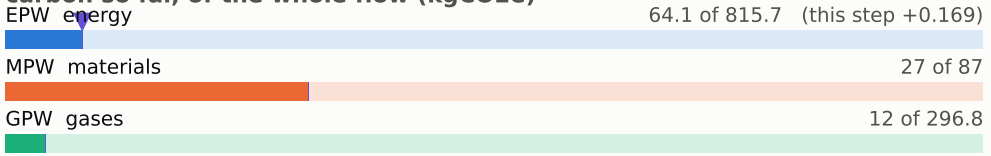

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

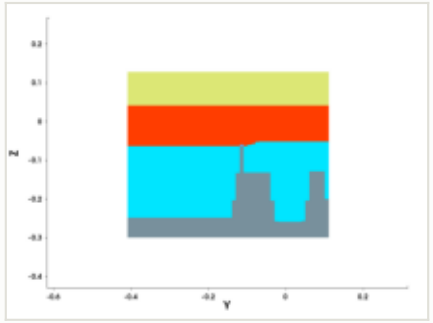

y cut at -0.150 µm

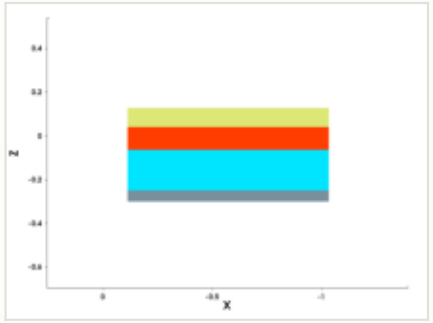

mask for this step

no mask for this step

steps by process area

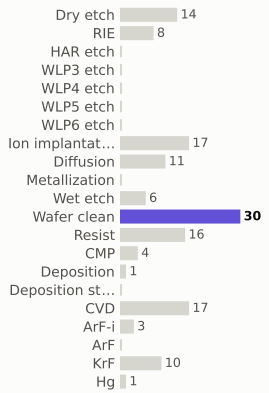

materials deposited (g)

gases emitted (g)

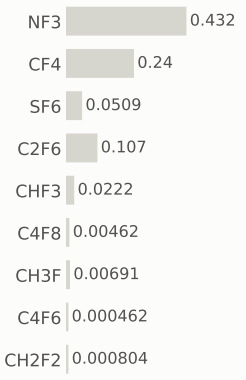

Step #1710: CVD

depo_isotropic · CVD

1.31	104.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

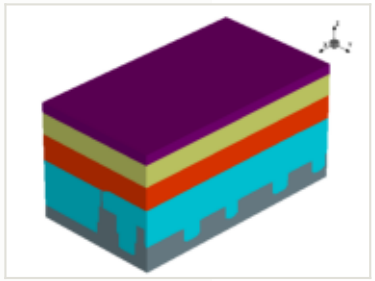

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 64.8 of 815.7 (this step +0.656)

MPW materials — 27 of 87 (this step +0.0317)

GPW gases — 12.7 of 296.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

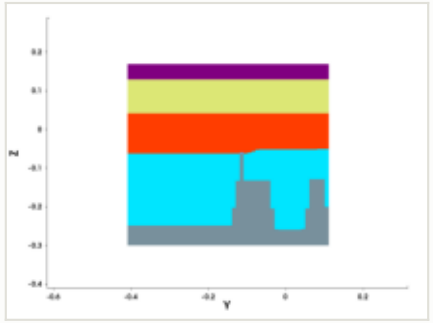

y cut at -0.150 µm

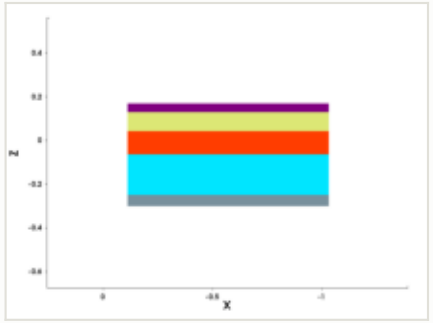

mask for this step

no mask for this step

steps by process area

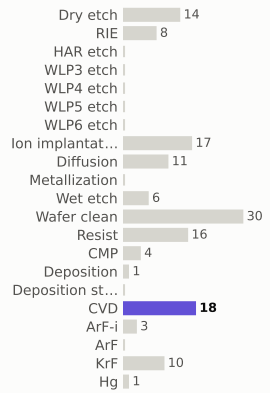

materials deposited (g)

gases emitted (g)

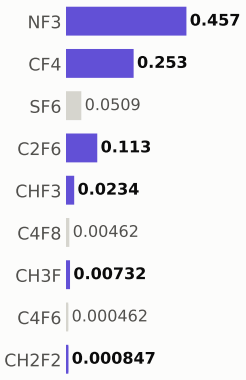

Step #1720: Resist

resist · Resist

0.169	104.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

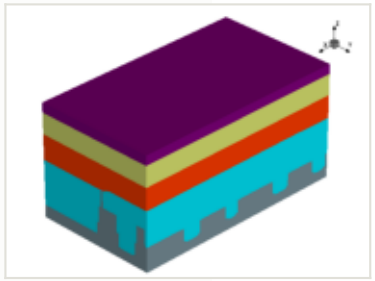

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

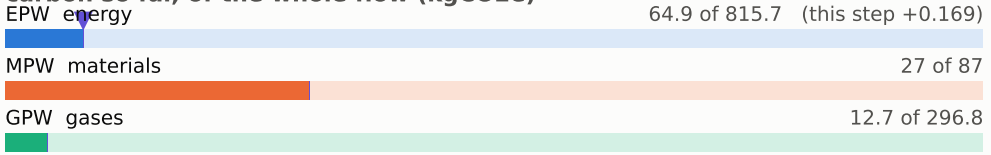

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

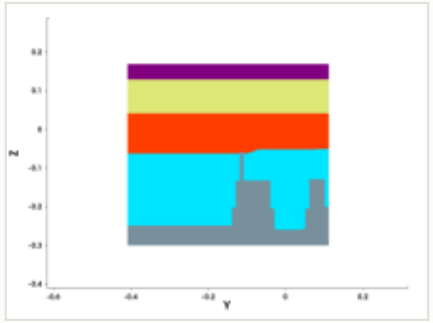

y cut at -0.150 µm

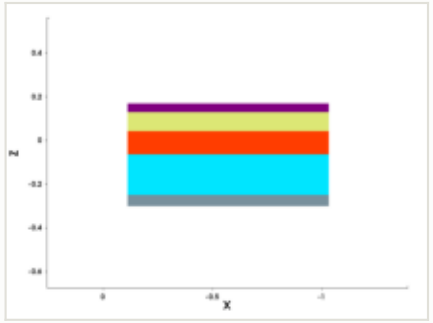

mask for this step

no mask for this step

steps by process area

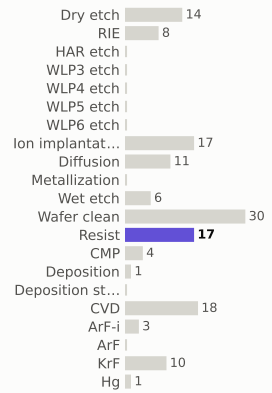

materials deposited (g)

gases emitted (g)

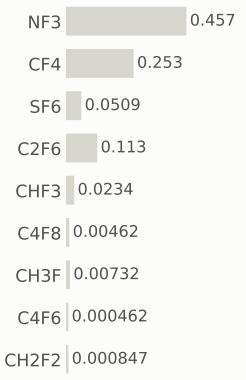

Step #1730: Resist

depo_fill · Resist

0.169	104.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

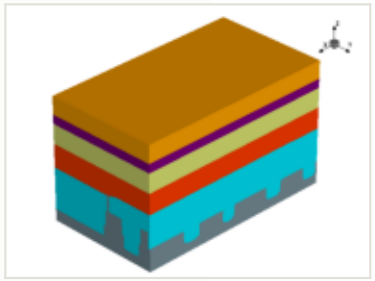

this step

process area	Resist
material	—
thickness	0.08 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

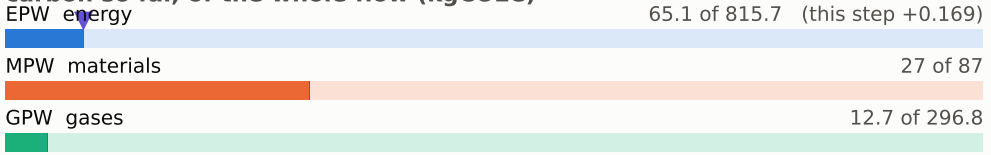

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

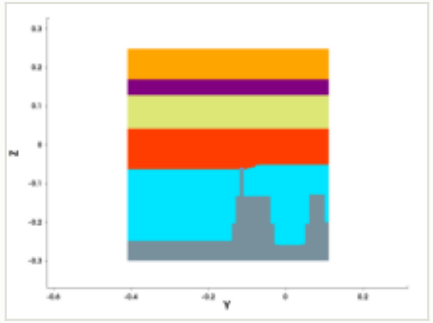

y cut at -0.150 µm

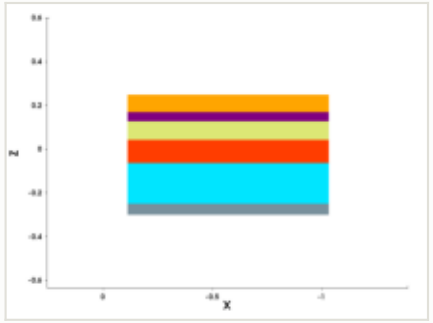

mask for this step

no mask for this step

steps by process area

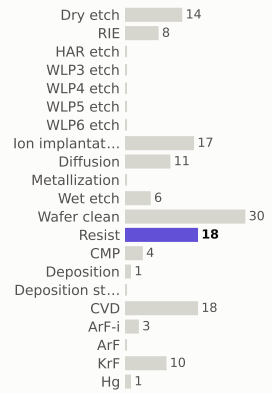

materials deposited (g)

gases emitted (g)

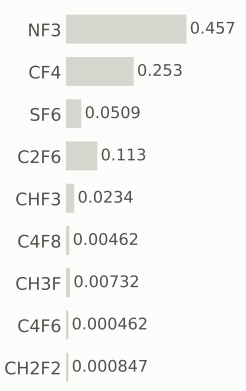

Step #1740: CVD

depo_isotropic · CVD

1.31	106.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

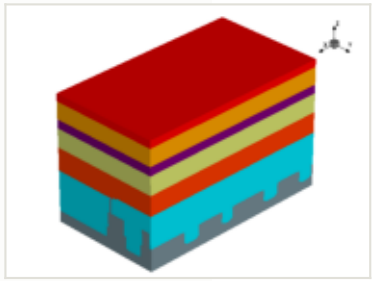

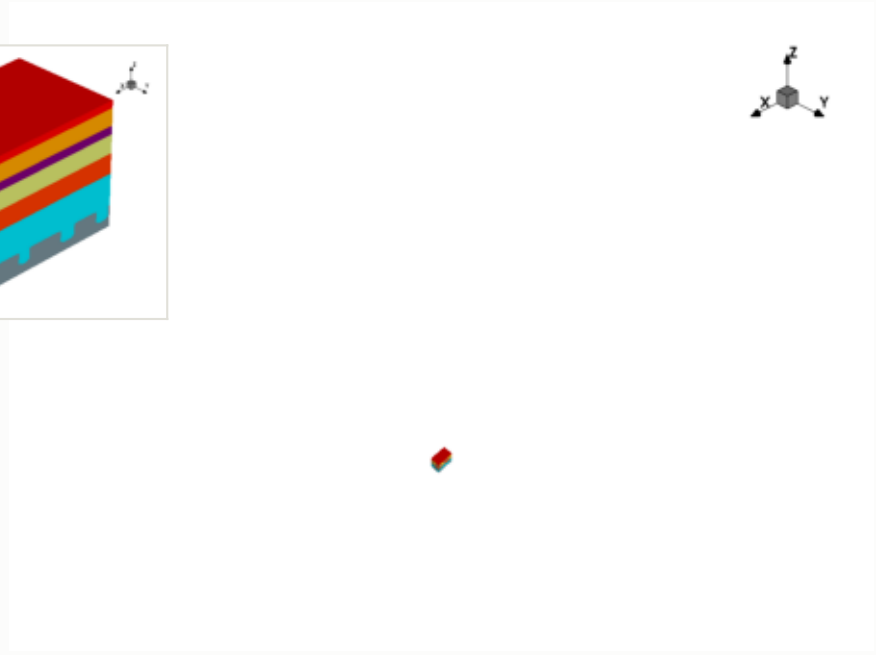

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 65.8 of 815.7 (this step +0.656)

MPW materials — 27.1 of 87 (this step +0.0317)

GPW gases — 13.3 of 296.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

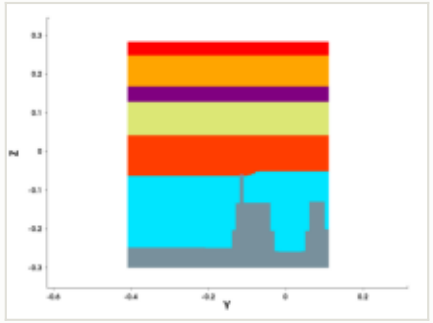

y cut at -0.150 µm

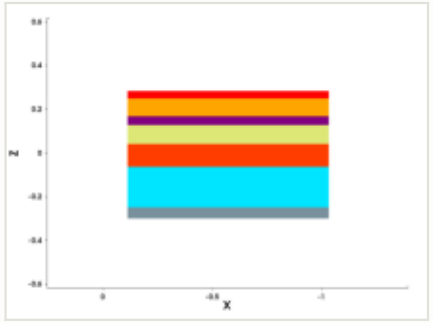

mask for this step

no mask for this step

steps by process area

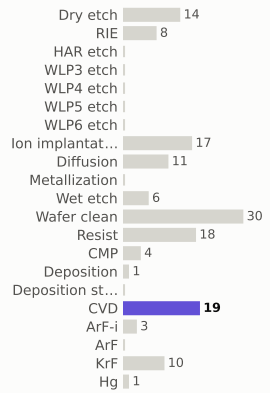

materials deposited (g)

gases emitted (g)

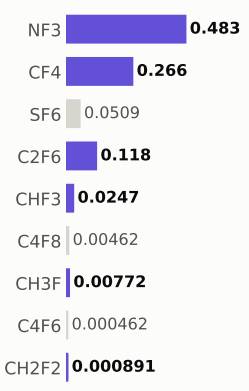

Step #1750: Wafer_clean

clean · Wafer_clean

0.169	106.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

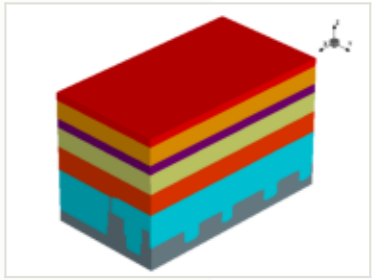

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

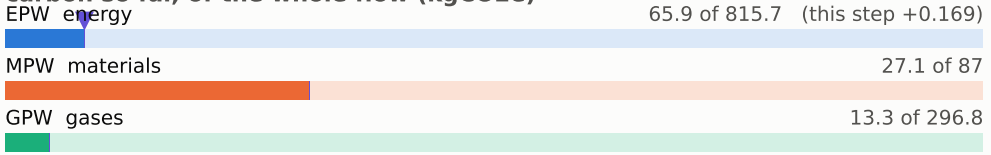

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

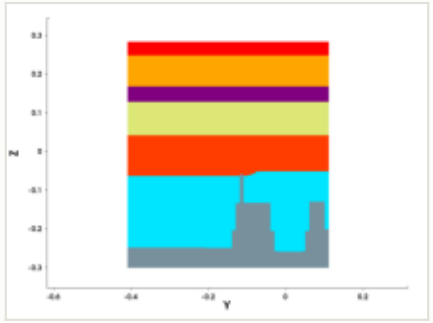

y cut at -0.150 µm

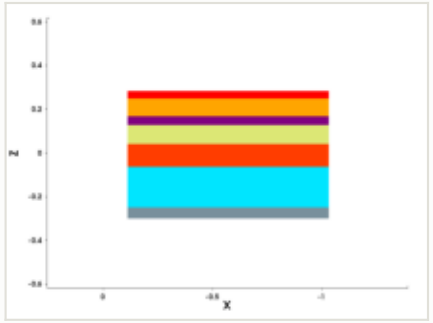

mask for this step

no mask for this step

steps by process area

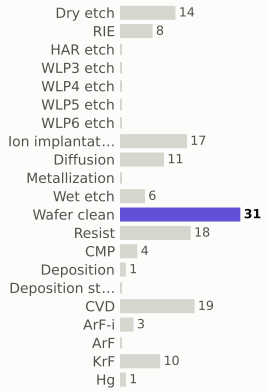

materials deposited (g)

gases emitted (g)

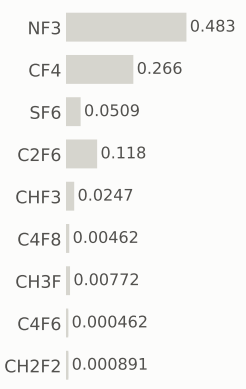

Step #1760: Resist

resist · Resist

0.169	106.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

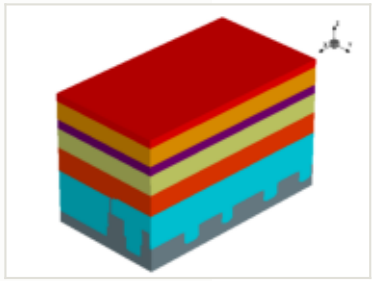

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

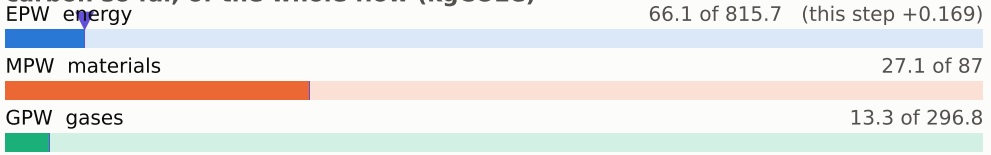

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

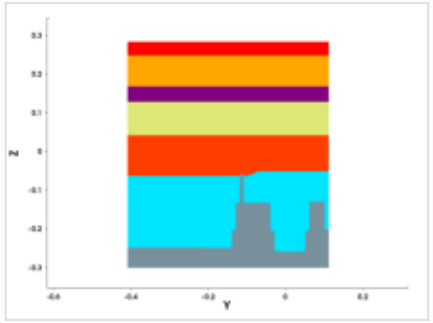

y cut at -0.150 µm

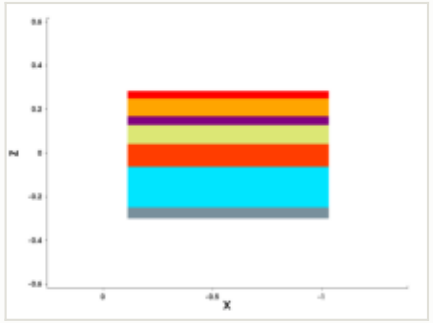

mask for this step

no mask for this step

steps by process area

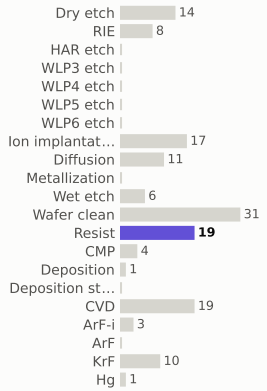

materials deposited (g)

gases emitted (g)

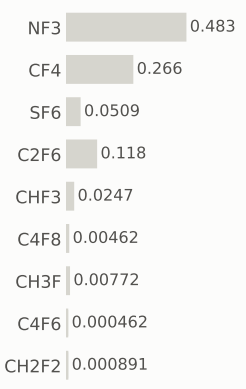

Step #1770: ArF-i

litho_patterning · ArF-i

0.217	106.7	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

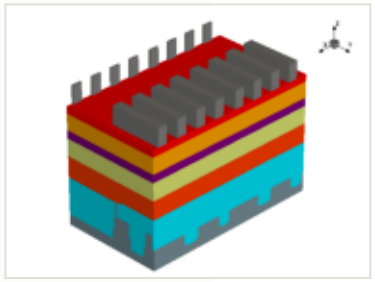

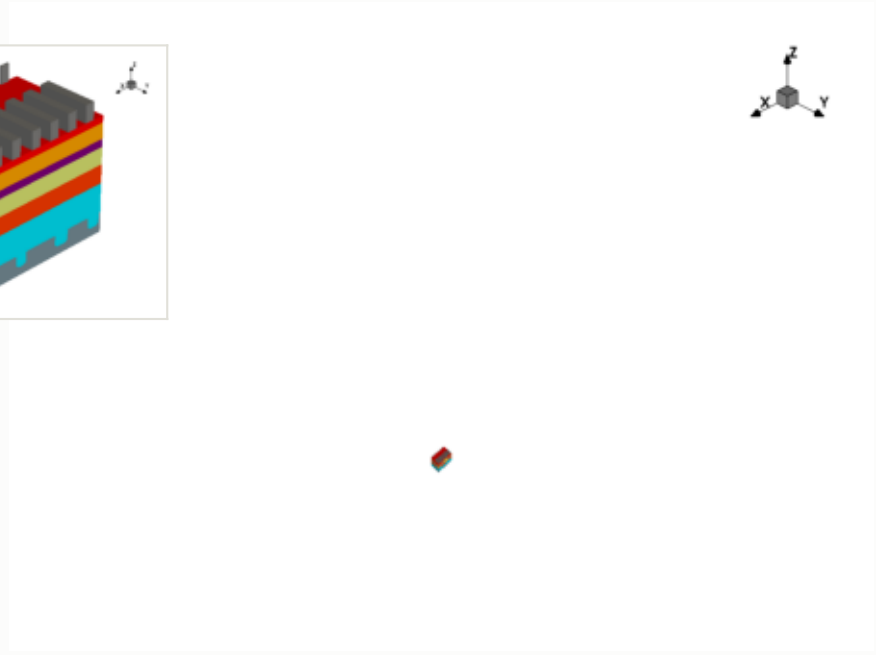

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

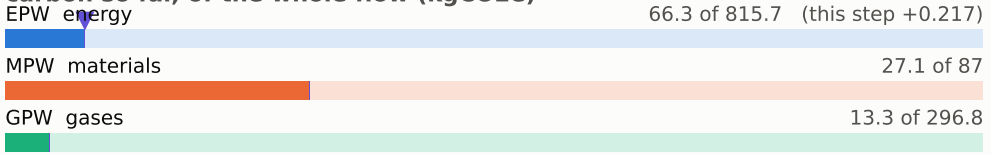

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

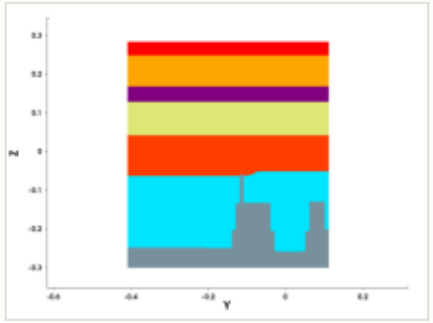

y cut at -0.150 µm

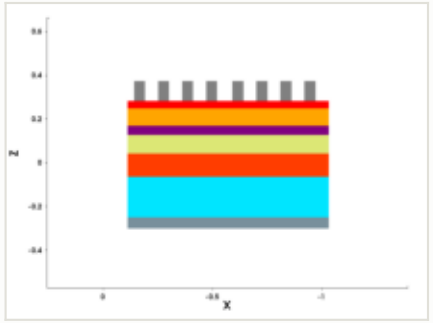

mask: layer 2400:0, positive (GDSII)

steps by process area

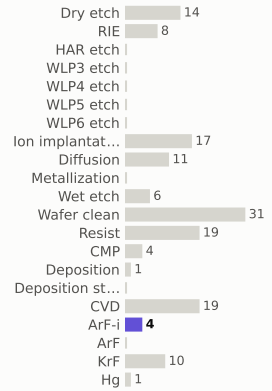

materials deposited (g)

gases emitted (g)

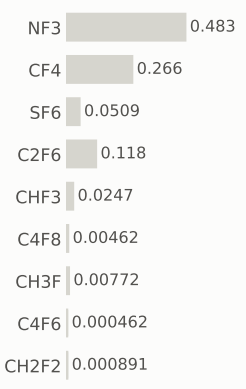

Step #1780: RIE

etch_isotropic · RIE

1.04	107.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

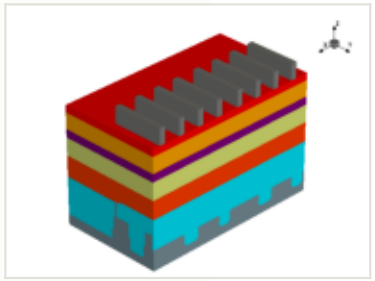

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

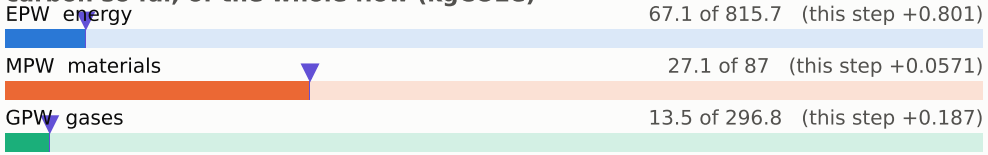

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

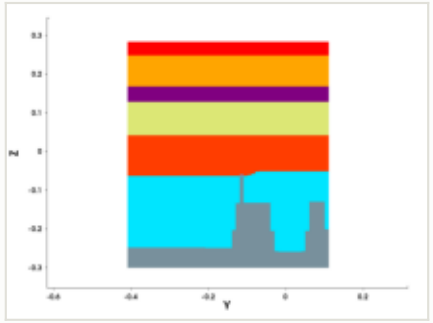

y cut at -0.150 µm

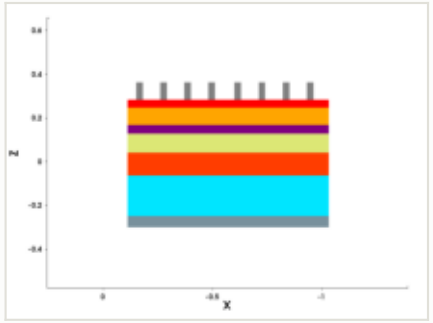

mask for this step

no mask for this step

steps by process area

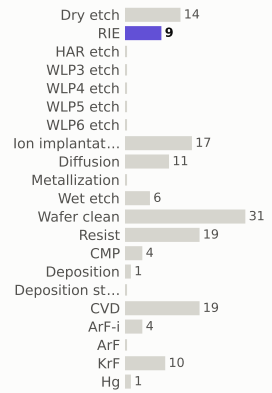

materials deposited (g)

gases emitted (g)

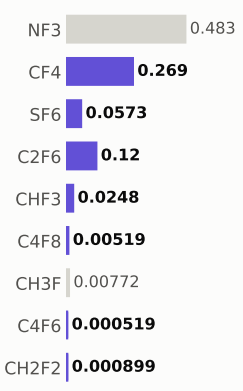

Step #1790: Spx_only

etch_anisotropic · Spx_only

0	107.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

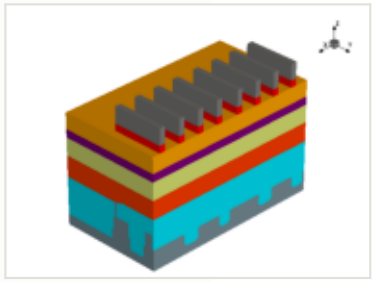

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

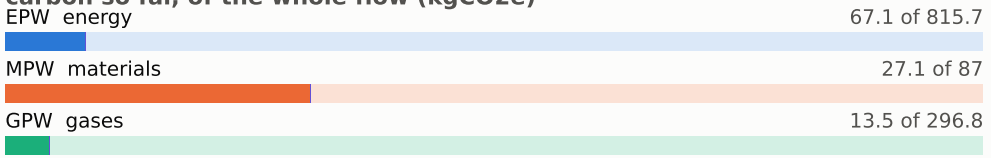

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

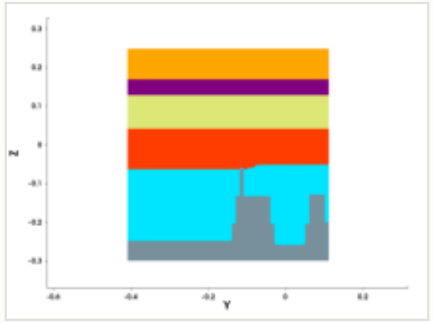

y cut at -0.150 µm

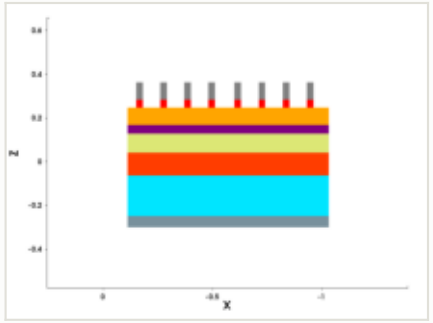

mask for this step

no mask for this step

steps by process area

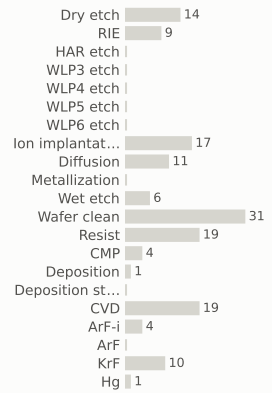

materials deposited (g)

gases emitted (g)

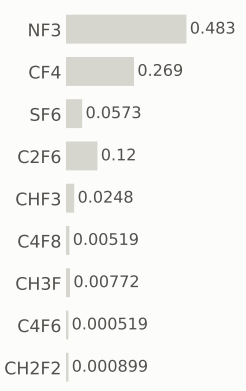

Step #1800: Spx_only

etch_anisotropic · Spx_only

0	107.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

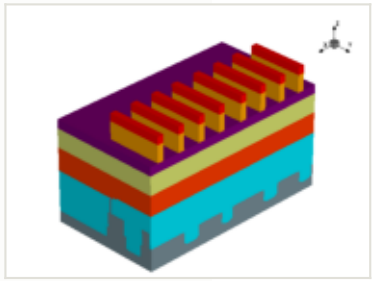

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 67.1 of 815.7

MPW materials 27.1 of 87

GPW gases 13.5 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

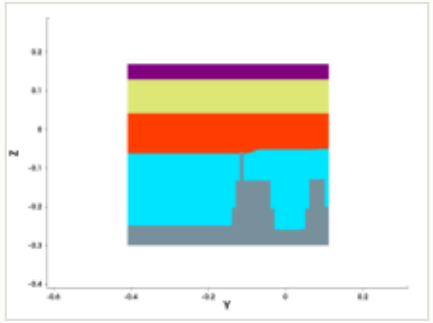

y cut at -0.150 µm

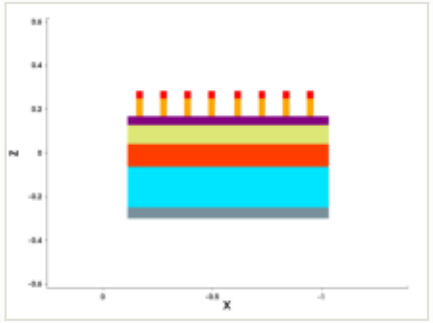

mask for this step

no mask for this step

steps by process area

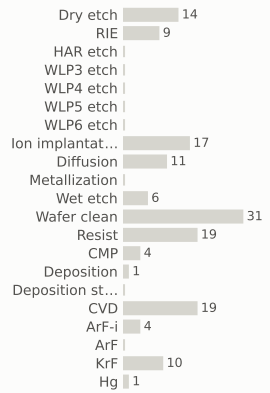

materials deposited (g)

gases emitted (g)

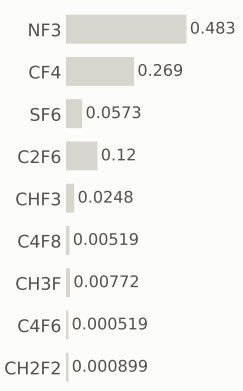

Step #1810: Wafer_clean

clean · Wafer_clean

0.169	107.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

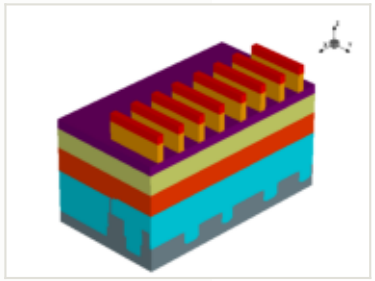

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

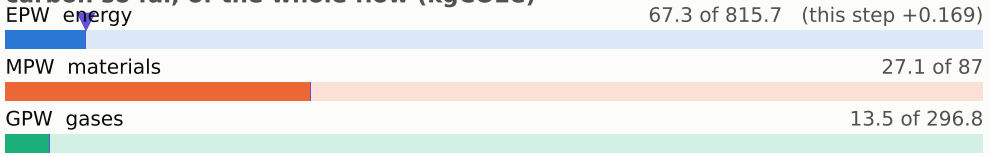

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

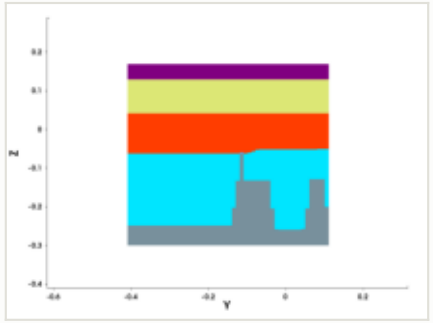

y cut at -0.150 µm

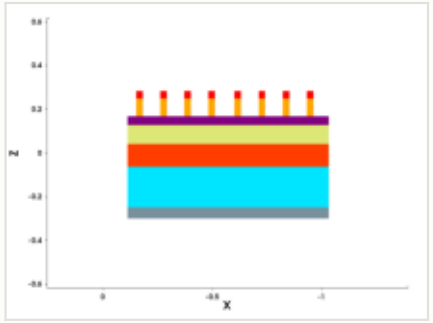

mask for this step

no mask for this step

steps by process area

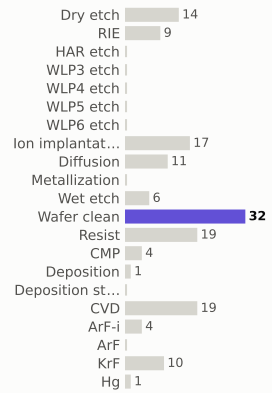

materials deposited (g)

gases emitted (g)

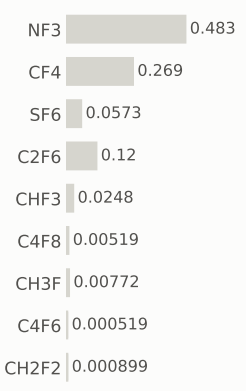

Step #1820: Deposition

depo_isotropic · Deposition

0.656	108.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

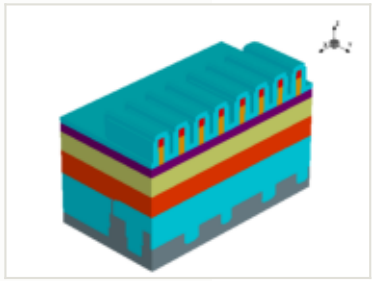

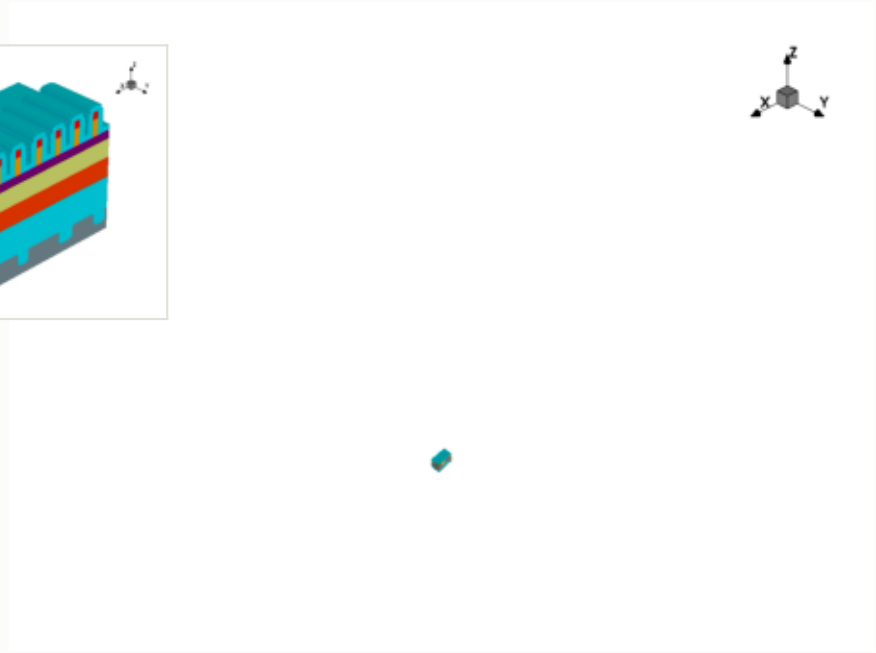

this step

process area	Deposition
material	—
thickness	0.025 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

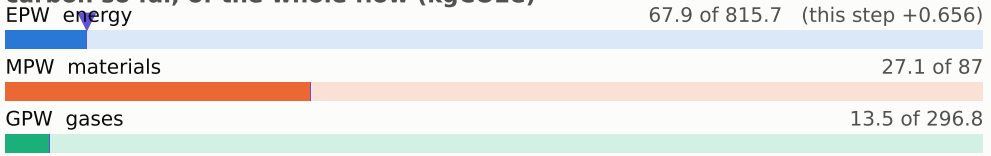

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

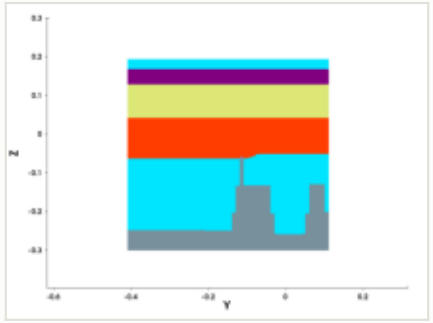

y cut at -0.150 µm

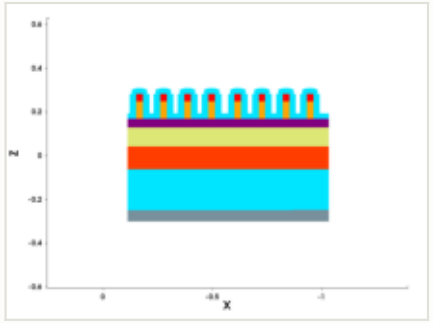

mask for this step

no mask for this step

steps by process area

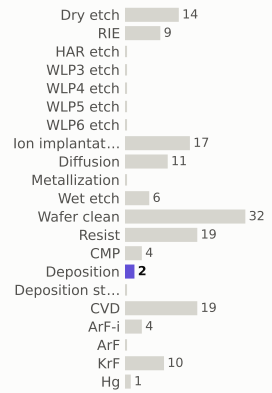

materials deposited (g)

gases emitted (g)

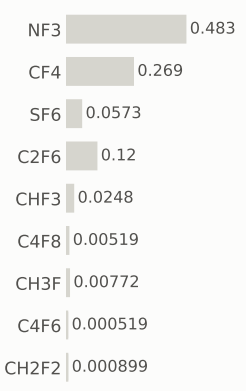

Step #1830: RIE

etch_ellipsoidal · RIE

1.04	109.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

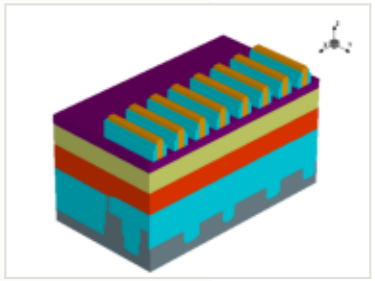

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

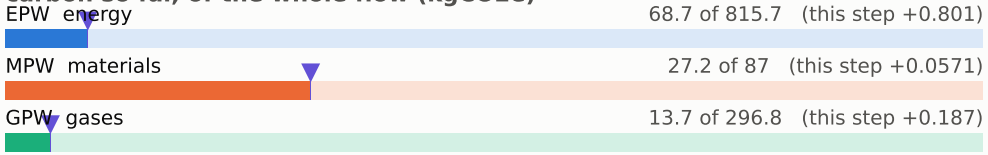

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

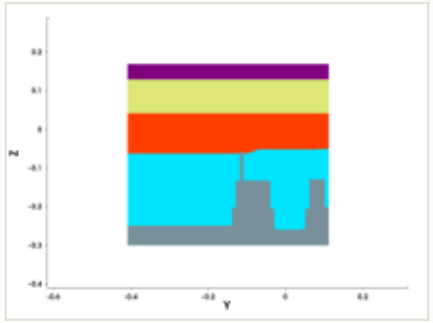

y cut at -0.150 µm

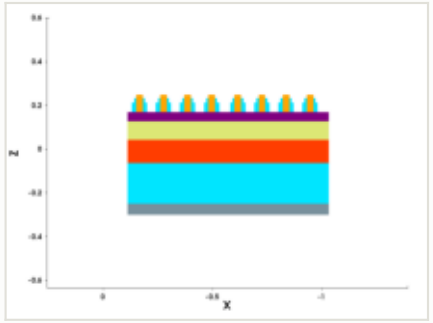

mask for this step

no mask for this step

steps by process area

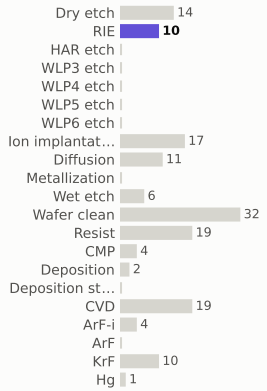

materials deposited (g)

gases emitted (g)

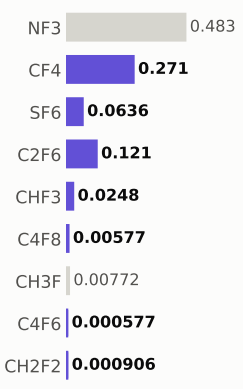

Step #1840: Spx_only

etch_isotropic · Spx_only

0	109.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

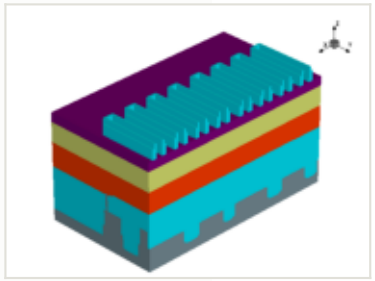

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

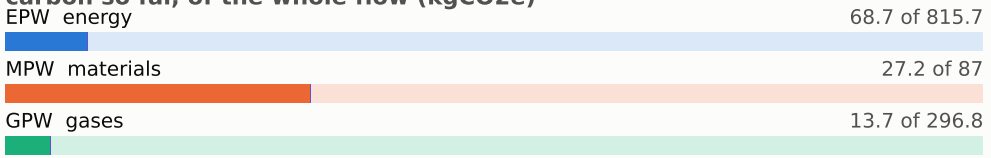

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

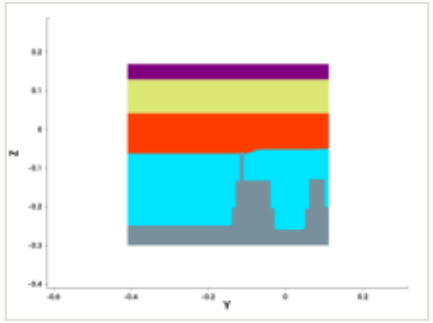

y cut at -0.150 µm

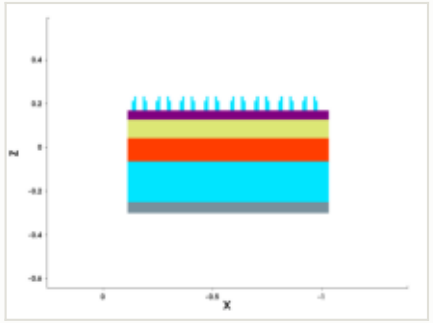

mask for this step

no mask for this step

steps by process area

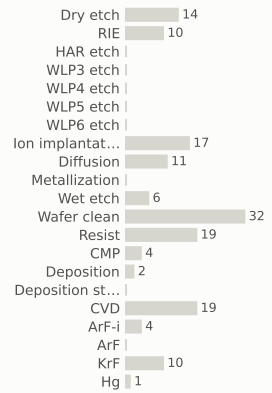

materials deposited (g)

gases emitted (g)

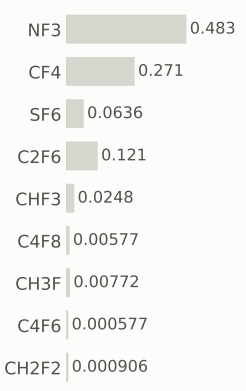

Step #1850: Wafer_clean

clean · Wafer_clean

0.169	109.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

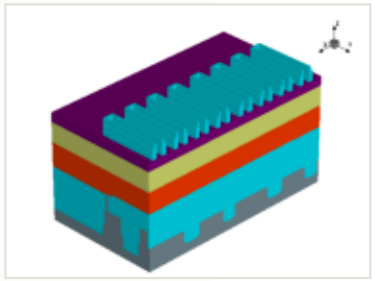

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

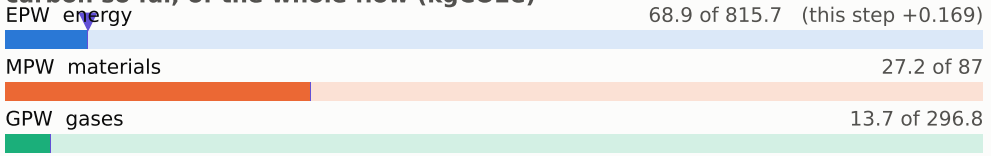

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

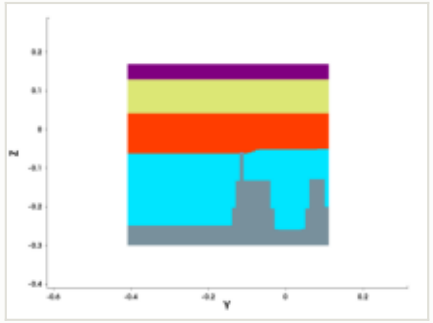

y cut at -0.150 µm

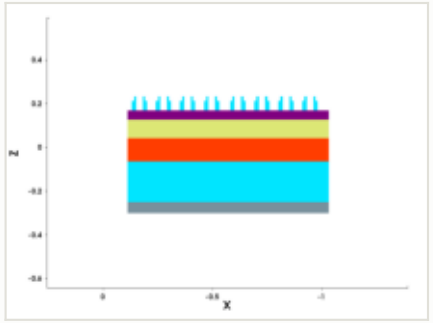

mask for this step

no mask for this step

steps by process area

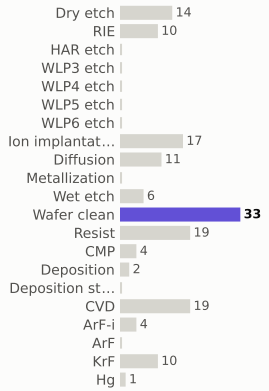

materials deposited (g)

gases emitted (g)



Step #1860: Wafer_clean

clean · Wafer_clean

0.169	109.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

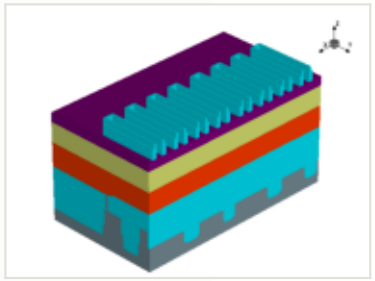

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

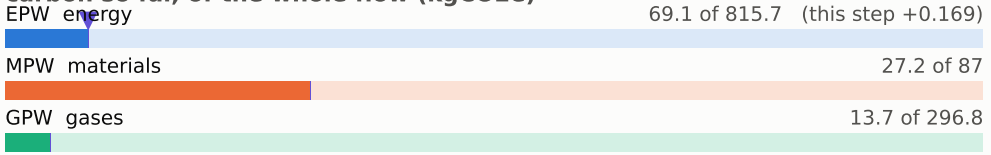

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

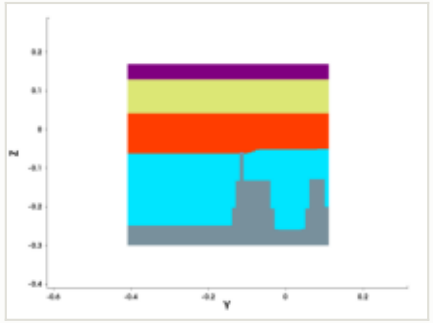

y cut at -0.150 µm

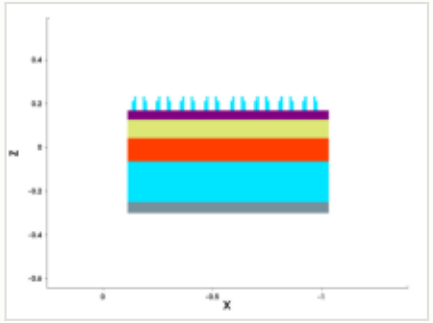

mask for this step

no mask for this step

steps by process area

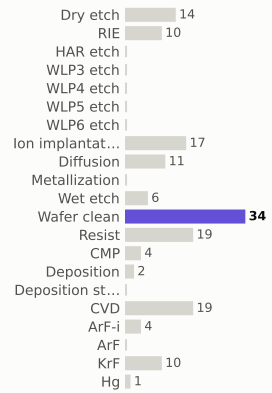

materials deposited (g)



gases emitted (g)

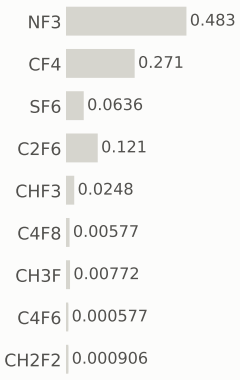

Step #1870: Resist

depo_fill · Resist

0.169	110.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

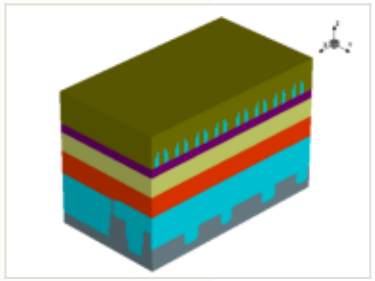

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.08 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

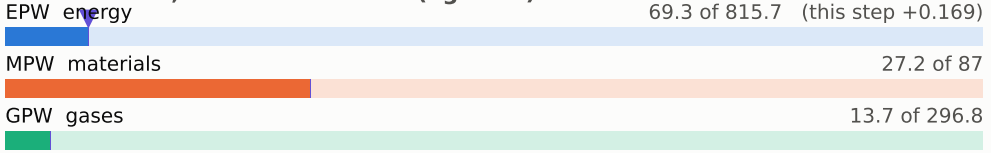

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

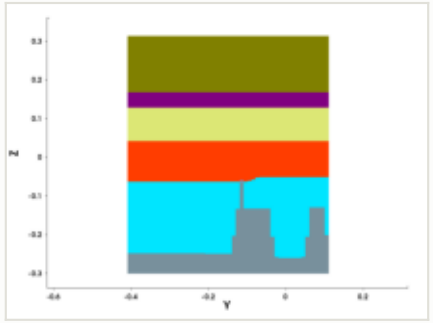

y cut at -0.150 µm

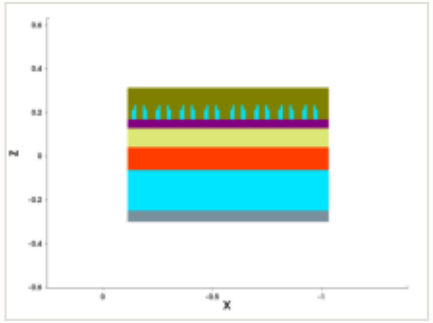

mask for this step

no mask for this step

steps by process area

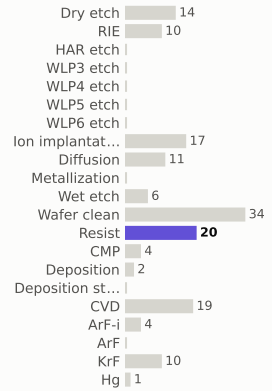

materials deposited (g)

gases emitted (g)

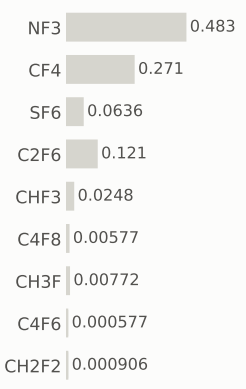

Step #1880: Spx_only

depo_fill · Spx_only

0	110.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

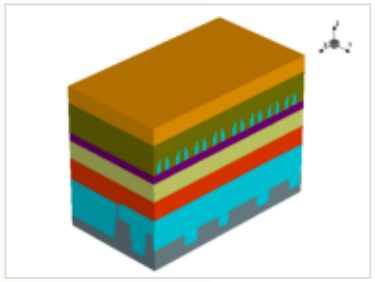

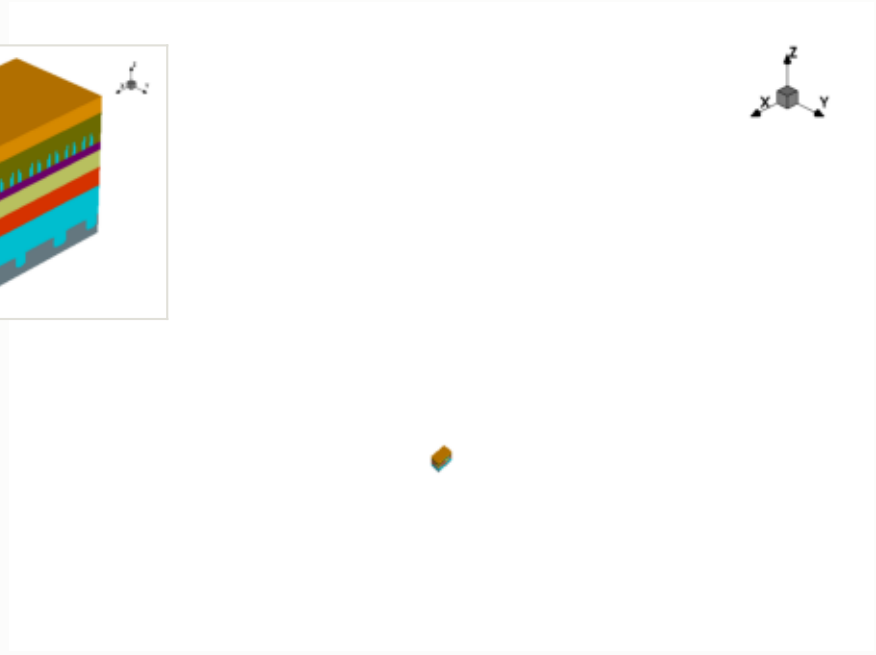

x cut at -0.570 µm

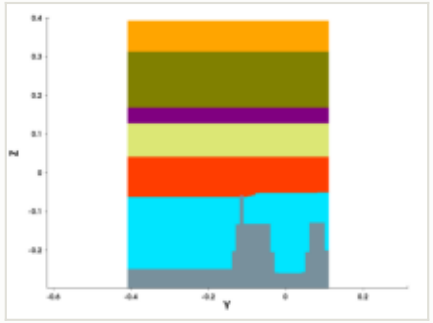

y cut at -0.150 µm

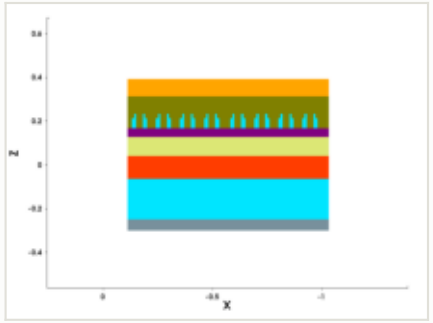

mask for this step

no mask for this step

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.08 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 69.3 of 815.7

MPW materials 27.2 of 87

GPW gases 13.7 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

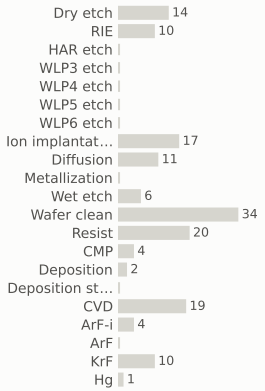

materials deposited (g)

gases emitted (g)

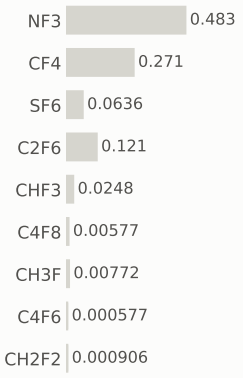

Step #1890: Resist

resist · Resist

0.169	110.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

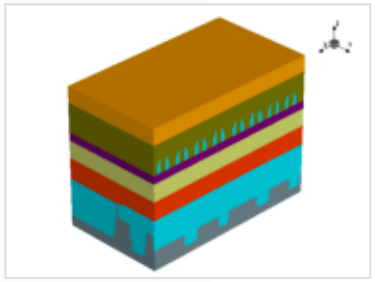

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

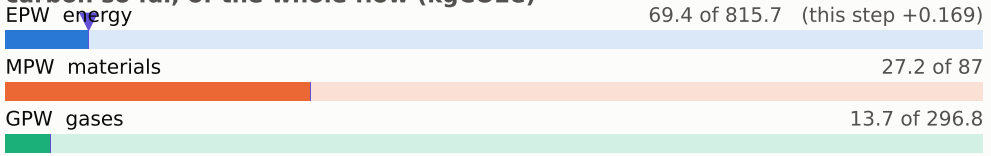

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

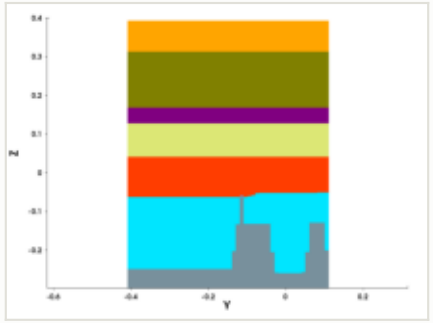

y cut at -0.150 µm

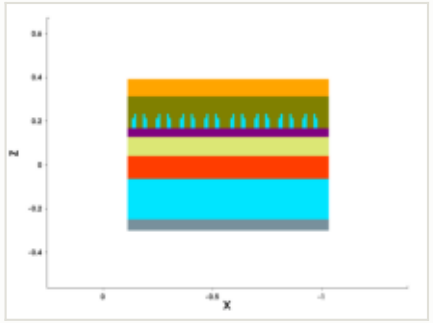

mask for this step

no mask for this step

steps by process area

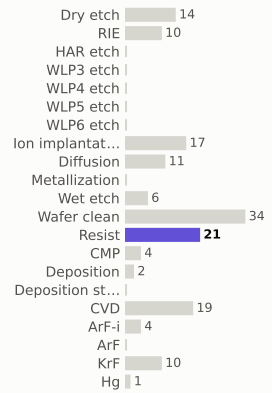

materials deposited (g)

gases emitted (g)

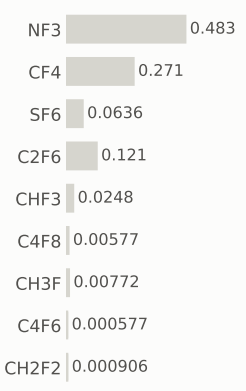

Step #1900: ArF

litho_patterning · ArF

0.199	110.5	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

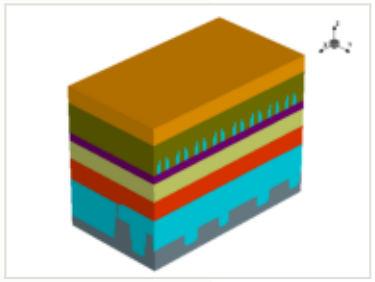

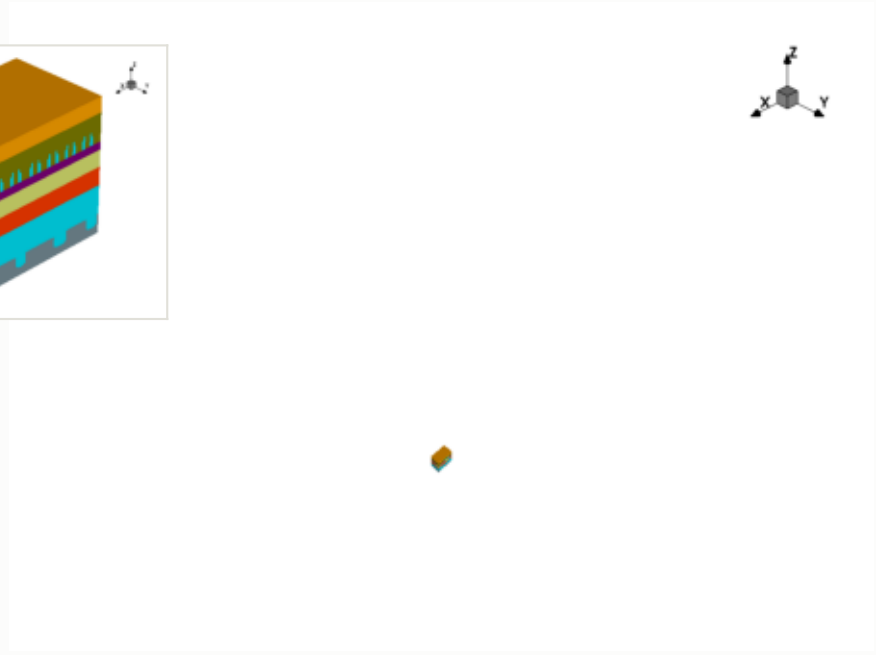

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

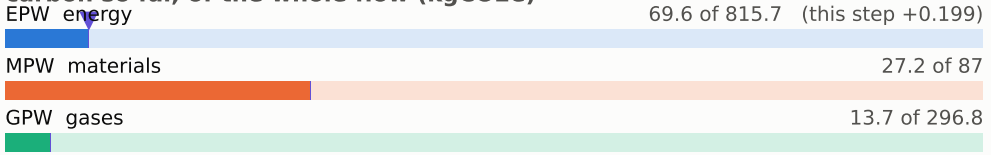

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

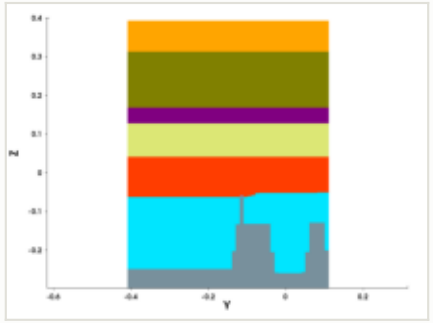

y cut at -0.150 µm

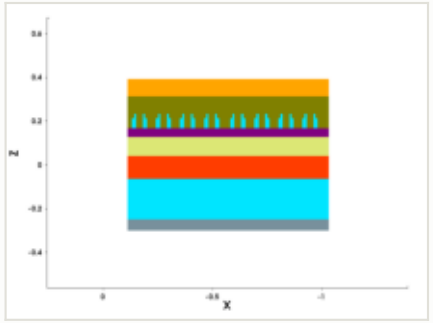

mask for this step

no mask for this step

steps by process area

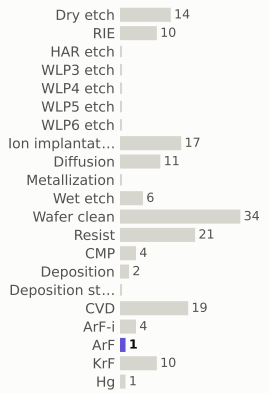

materials deposited (g)

gases emitted (g)



Step #1910: Spx_only

etch_anisotropic · Spx_only

0	110.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

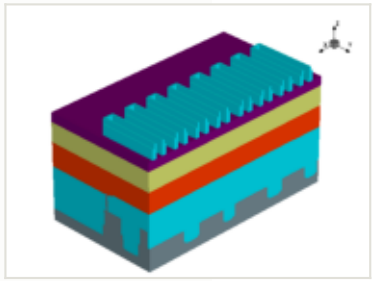

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

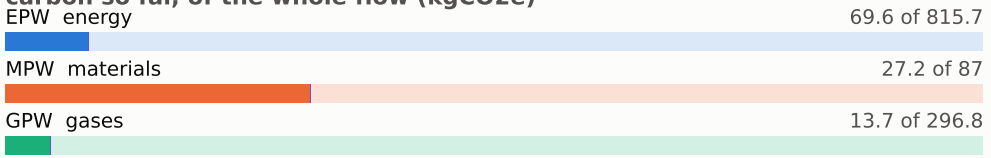

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

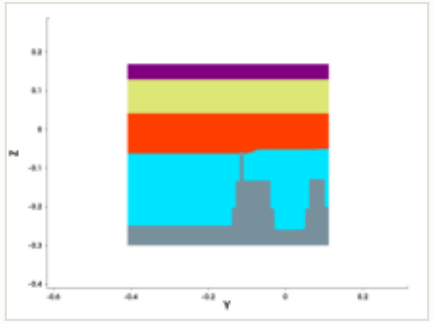

y cut at -0.150 µm

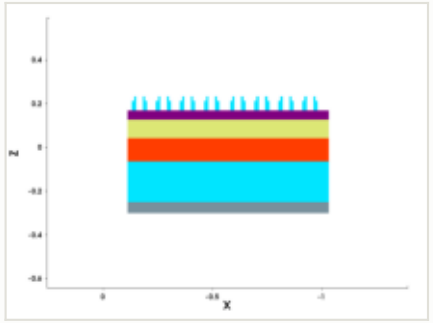

mask for this step

no mask for this step

steps by process area

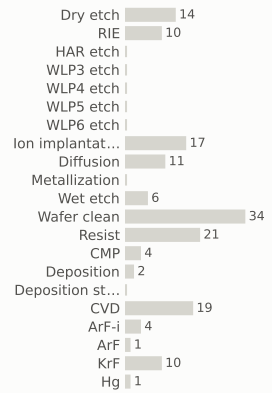

materials deposited (g)

gases emitted (g)

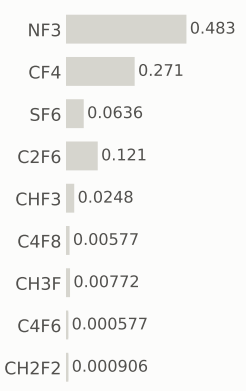

Step #1920: RIE

etch_anisotropic · RIE

1.04	111.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

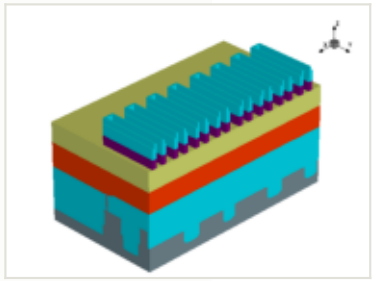

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

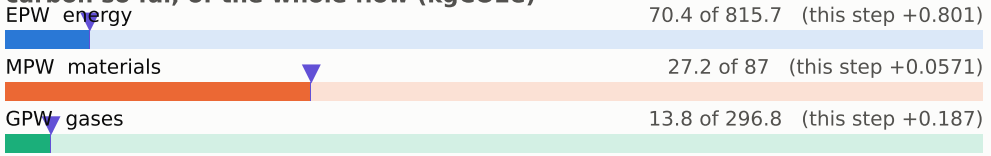

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

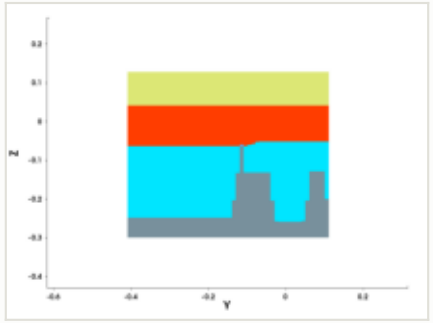

y cut at -0.150 µm

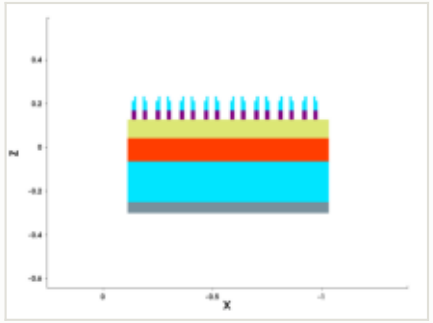

mask for this step

no mask for this step

steps by process area

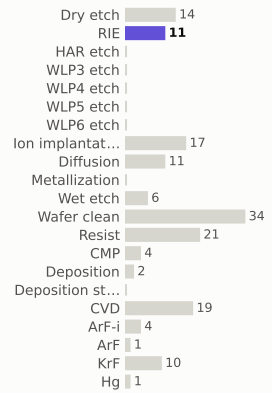

materials deposited (g)

gases emitted (g)

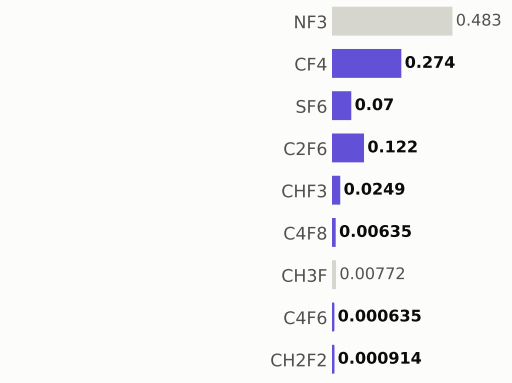

Step #1930: Spx_only

etch_anisotropic · Spx_only

0	111.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

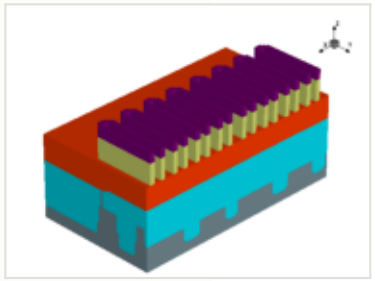

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

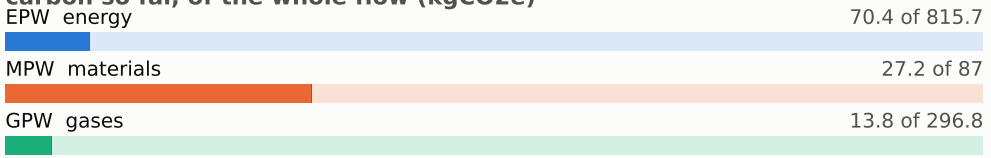

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

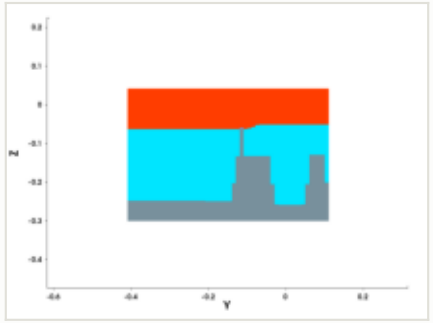

y cut at -0.150 µm

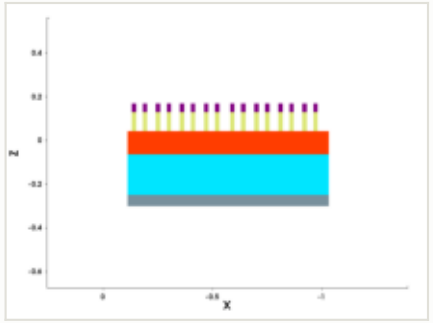

mask for this step

no mask for this step

steps by process area

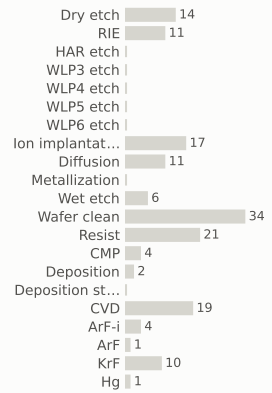

materials deposited (g)

gases emitted (g)

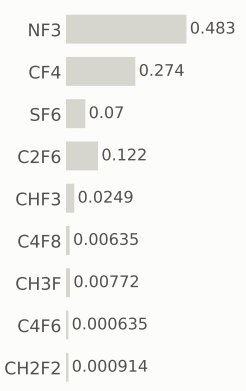

Step #1940: Spx_only

etch_strip · Spx_only

0	111.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

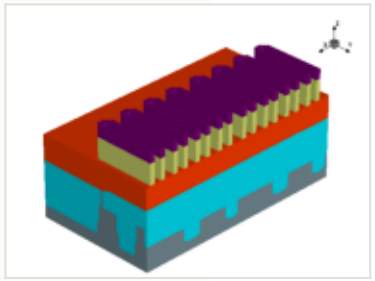

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

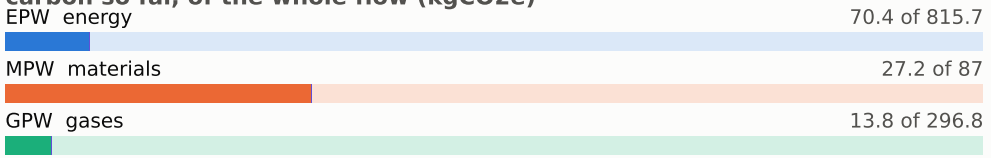

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

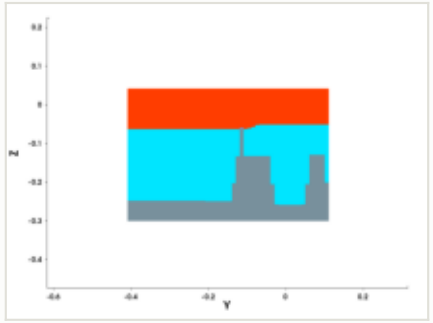

y cut at -0.150 µm

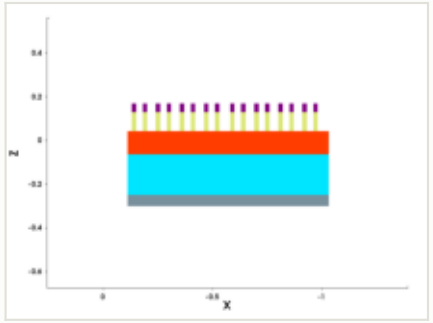

mask for this step

no mask for this step

steps by process area

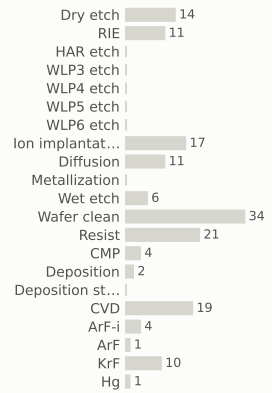

materials deposited (g)

gases emitted (g)

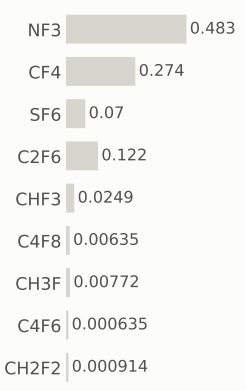

Step #1950: Wafer_clean

clean · Wafer_clean

0.169	111.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

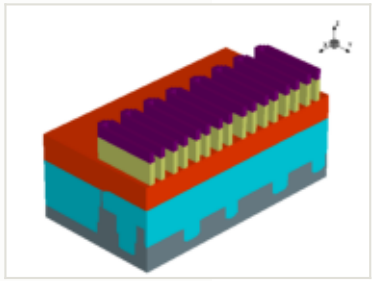

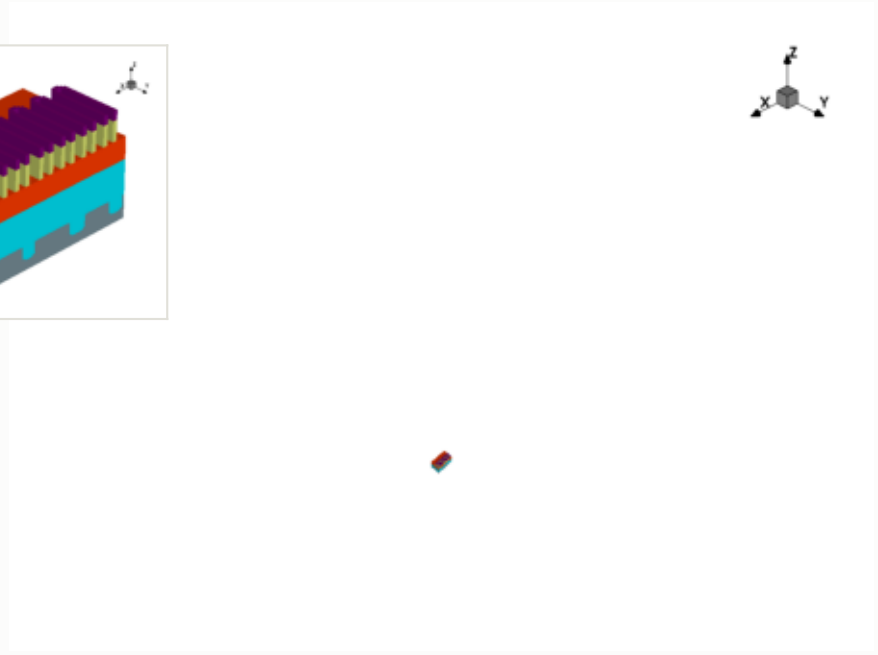

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

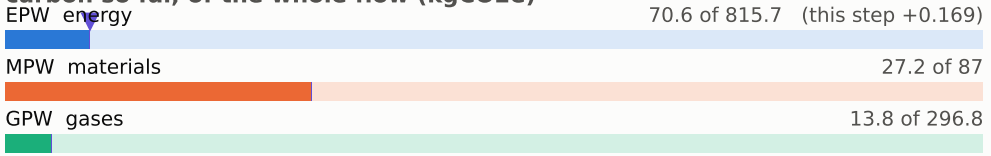

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

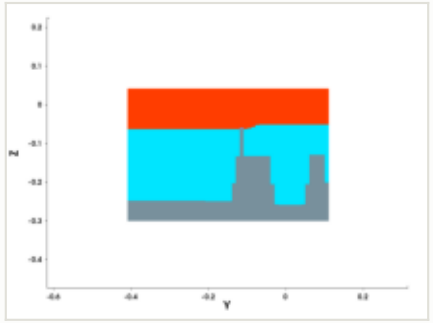

y cut at -0.150 µm

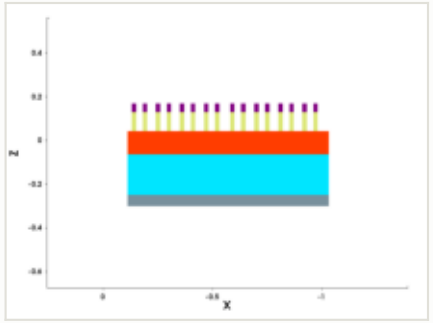

mask for this step

no mask for this step

steps by process area

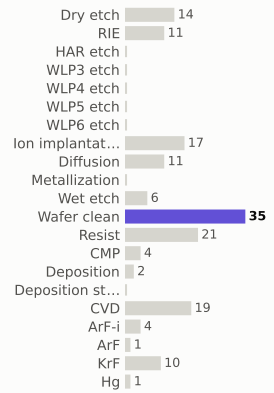

materials deposited (g)

gases emitted (g)

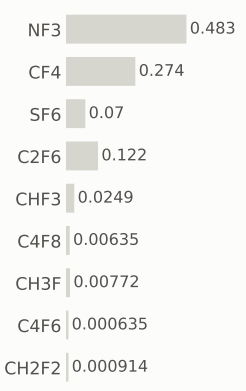

Step #1960: Resist

depo_fill · Resist

0.169	111.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

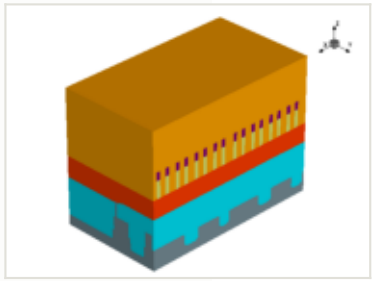

this step

process area	Resist
material	—
thickness	0.2 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

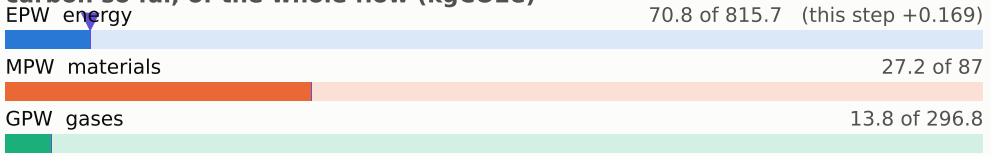

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

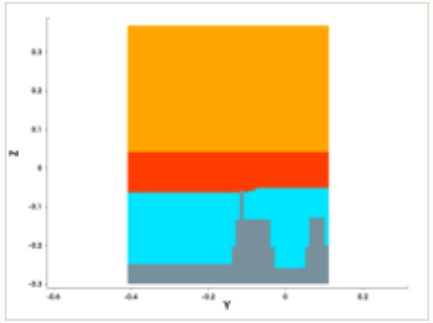

y cut at -0.150 µm

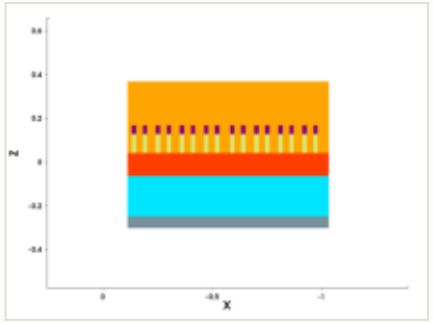

mask for this step

no mask for this step

steps by process area

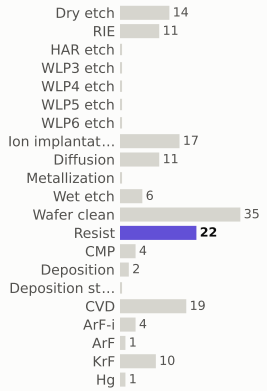

materials deposited (g)

gases emitted (g)

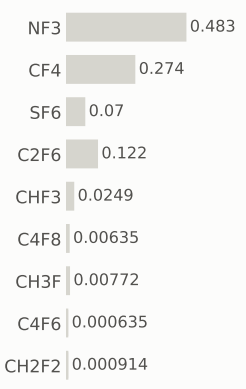

Step #1970: CVD

depo_isotropic · CVD

1.31	113.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

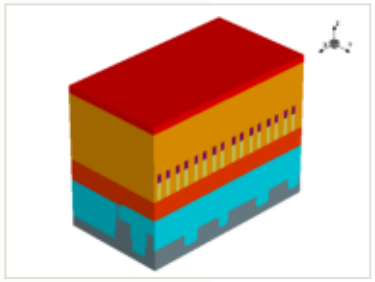

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 71.4 of 815.7 (this step +0.656)

MPW materials — 27.3 of 87 (this step +0.0317)

GPW gases — 14.5 of 296.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

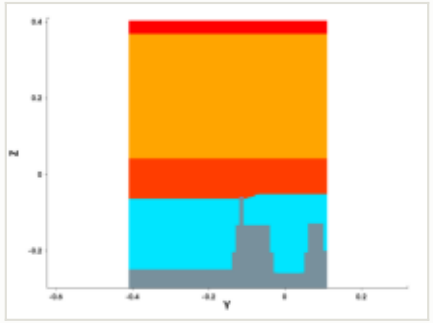

y cut at -0.150 µm

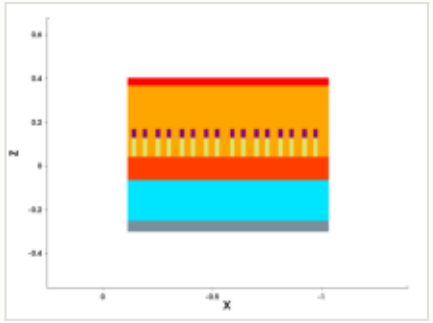

mask for this step

no mask for this step

steps by process area

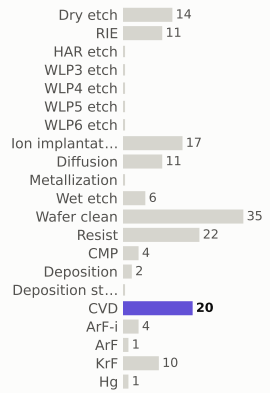

materials deposited (g)



gases emitted (g)

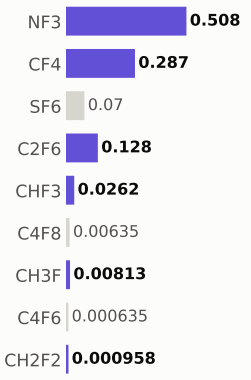

Step #1980: Wafer_clean

clean · Wafer_clean

0.169	113.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

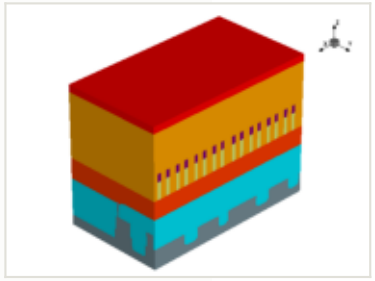

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

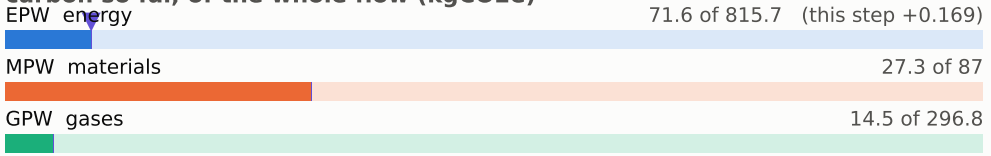

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

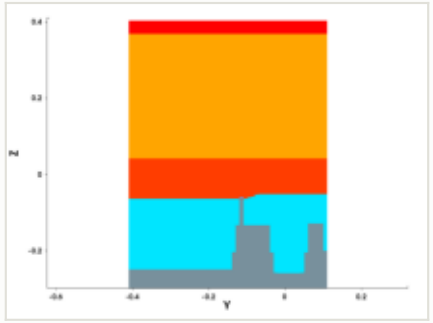

y cut at -0.150 µm

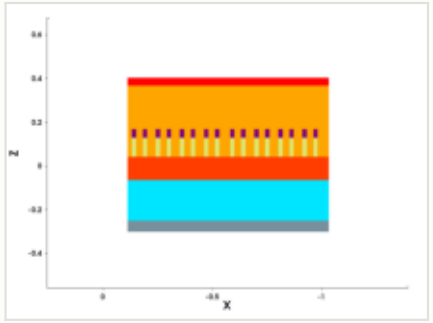

mask for this step

no mask for this step

steps by process area

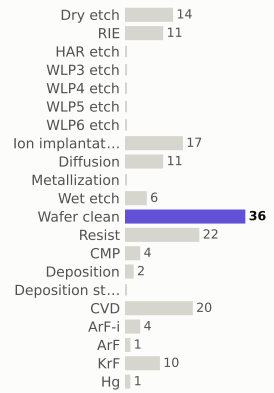

materials deposited (g)

gases emitted (g)

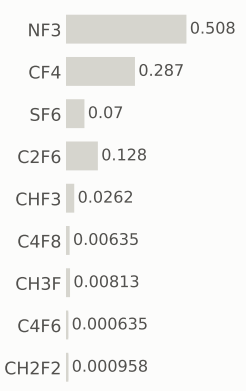

Step #1990: Resist

resist · Resist

0.169	113.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

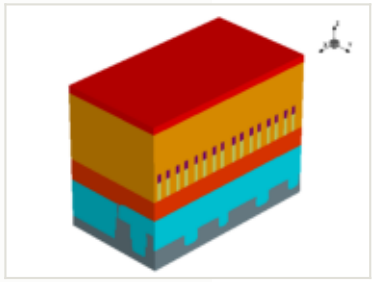

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

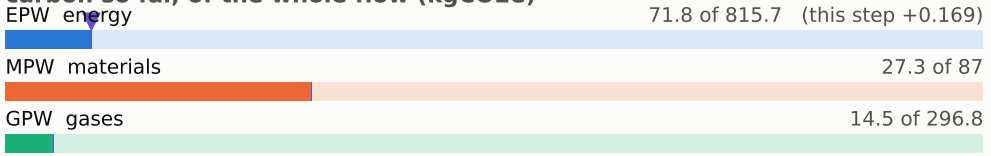

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

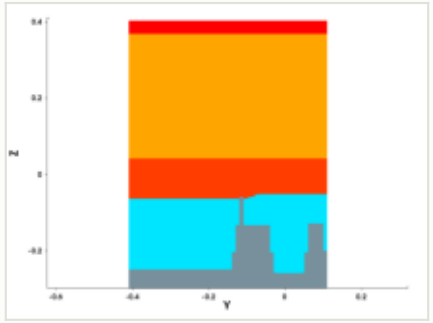

y cut at -0.150 µm

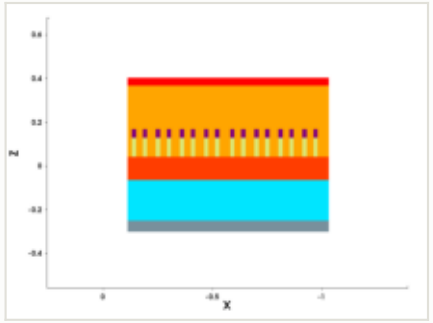

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

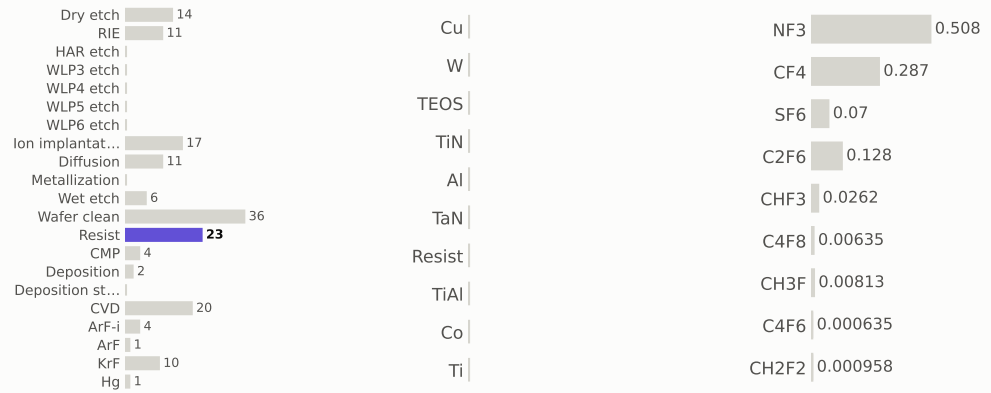

Step #2000: ArF-i

litho_patterning · ArF-i

0.217	113.7	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

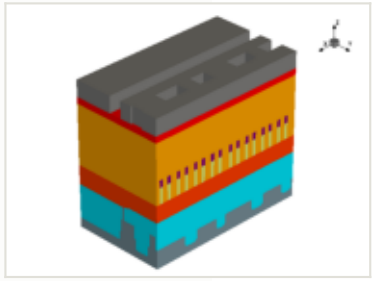

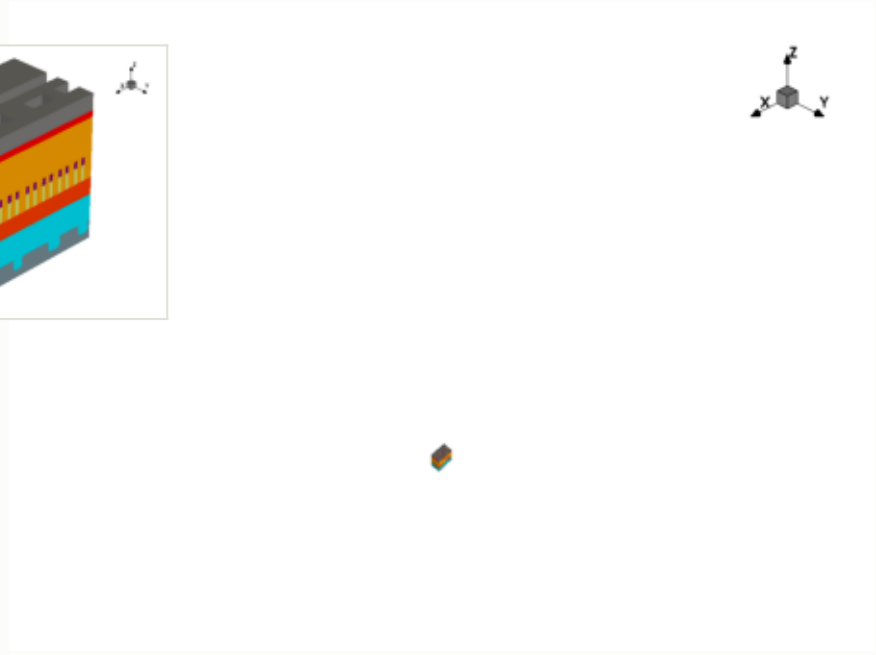

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

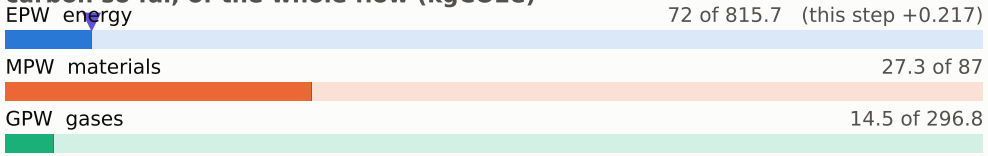

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

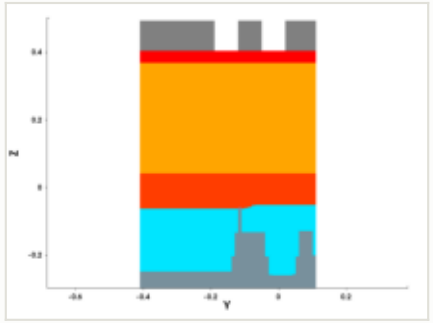

y cut at -0.150 µm

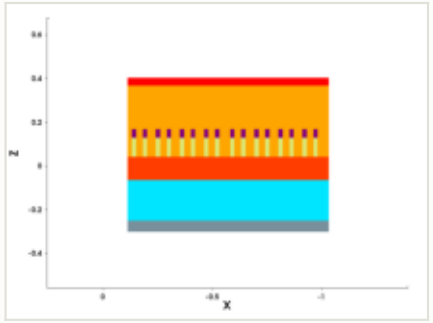

mask: layer 2010:0 (GDSII)



steps by process area

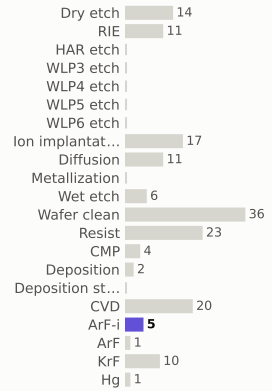

materials deposited (g)

gases emitted (g)

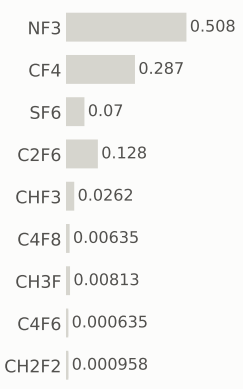

Step #2010: RIE

etch_anisotropic · RIE

1.04	114.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

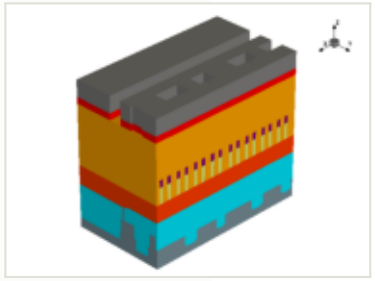

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 72.8 of 815.7 (this step +0.801)

MPW materials — 27.3 of 87 (this step +0.0571)

GPW gases — 14.7 of 296.8 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

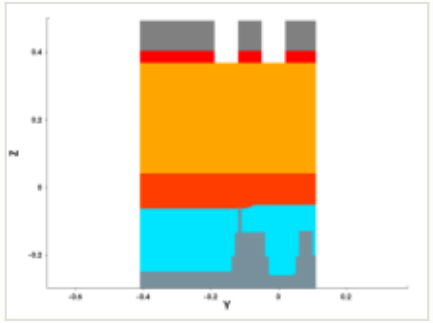

y cut at -0.150 µm

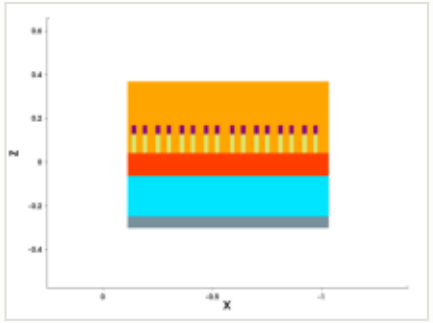

mask for this step

no mask for this step

steps by process area

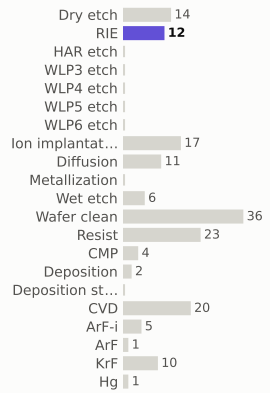

materials deposited (g)

gases emitted (g)

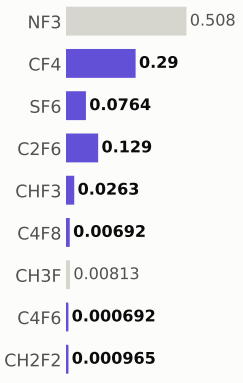

Step #2020: Wafer_clean

clean · Wafer_clean

0.169	114.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

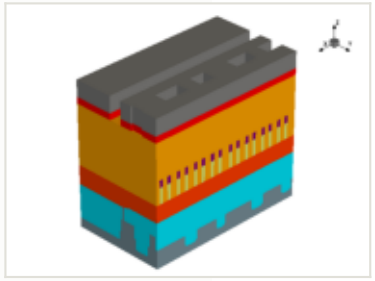

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

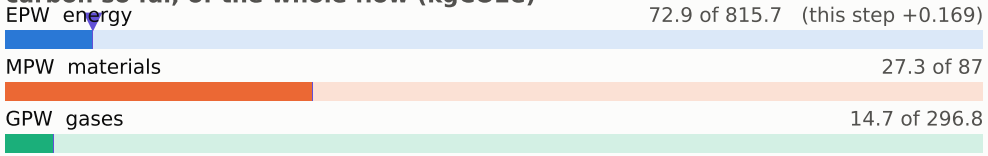

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

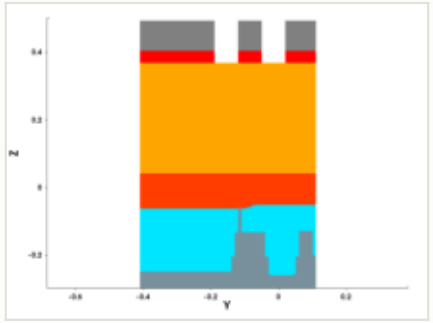

y cut at -0.150 µm

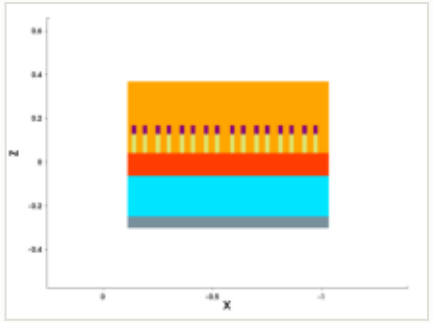

mask for this step

no mask for this step

steps by process area

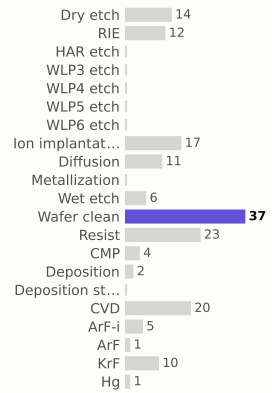

materials deposited (g)



gases emitted (g)

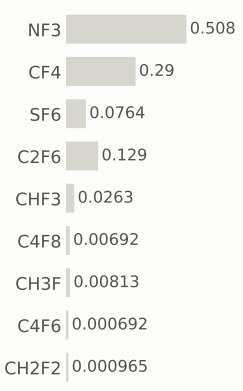

Step #2030: Deposition

depo_isotropic · Deposition

0.656	115.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

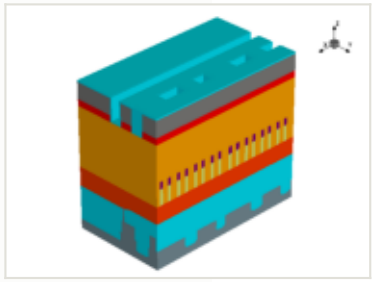

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.009 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

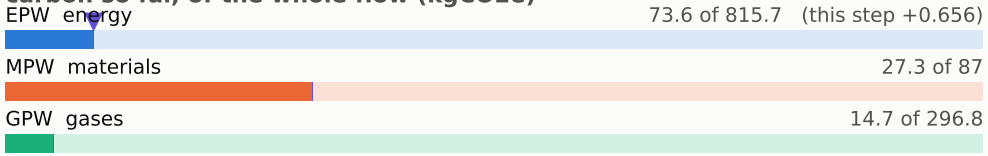

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

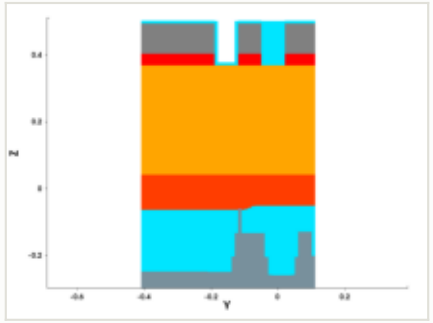

y cut at -0.150 µm

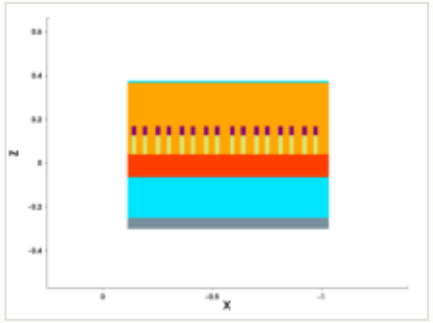

mask for this step

no mask for this step

steps by process area

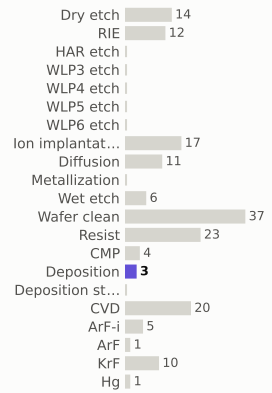

materials deposited (g)

gases emitted (g)

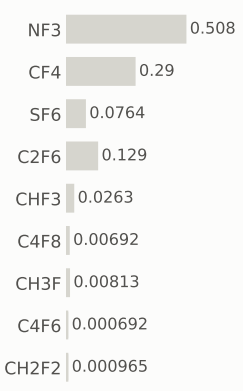

Step #2040: RIE

etch_anisotropic · RIE

1.04	116.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

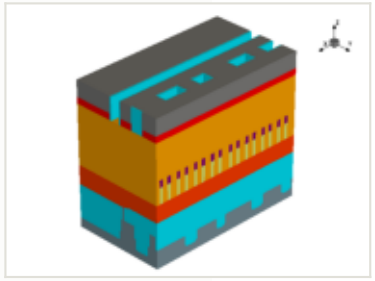

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

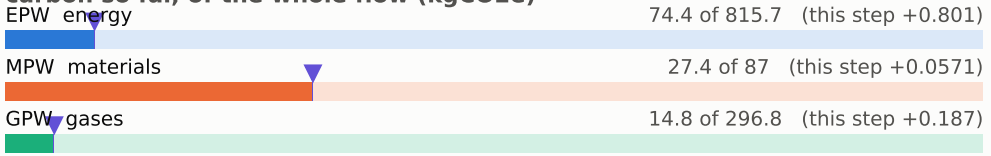

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

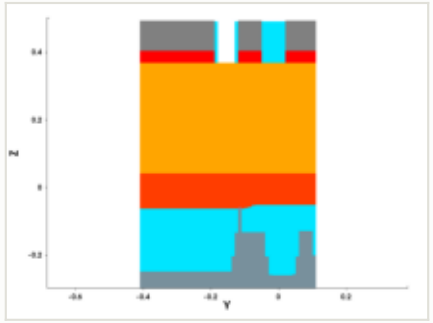

y cut at -0.150 µm

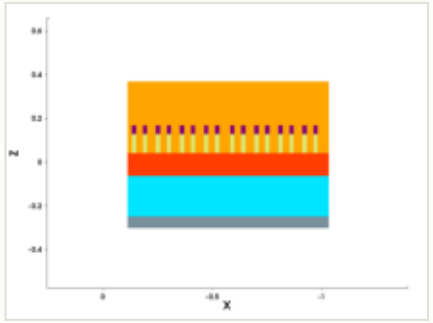

mask for this step

no mask for this step

steps by process area

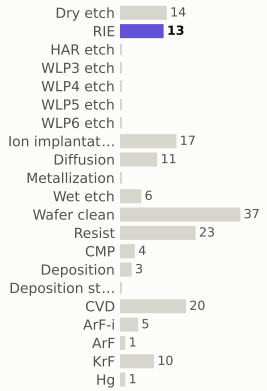

materials deposited (g)

gases emitted (g)

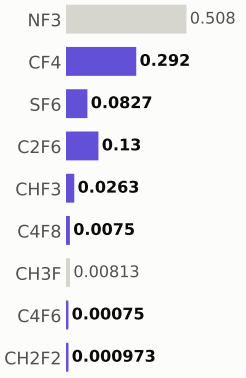

Step #2050: Spx_only

etch_anisotropic · Spx_only

0	116.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

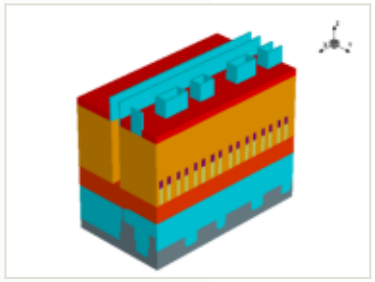

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 74.4 of 815.7

MPW materials 27.4 of 87

GPW gases 14.8 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

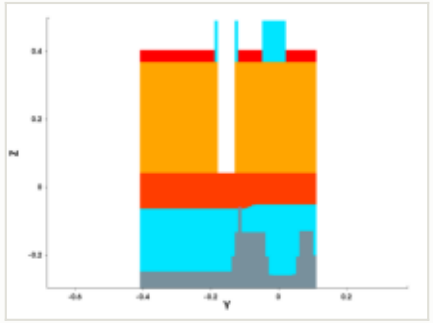

y cut at -0.150 µm

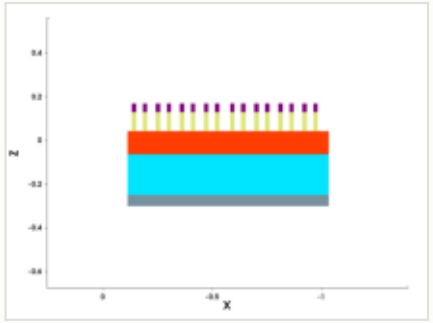

mask for this step

no mask for this step

steps by process area

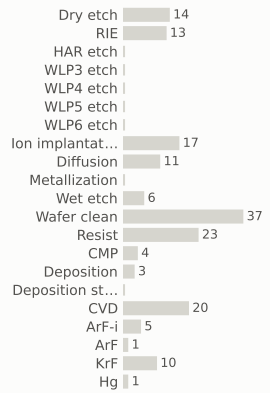

materials deposited (g)

gases emitted (g)

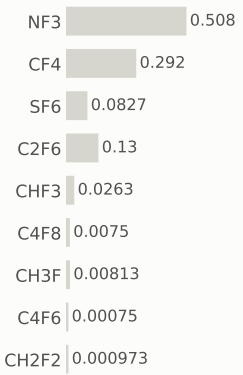

Step #2060: Spx_only

etch_anisotropic · Spx_only

0	116.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

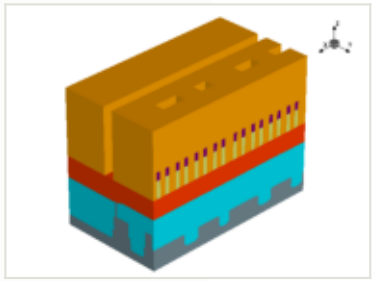

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 74.4 of 815.7

MPW materials 27.4 of 87

GPW gases 14.8 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

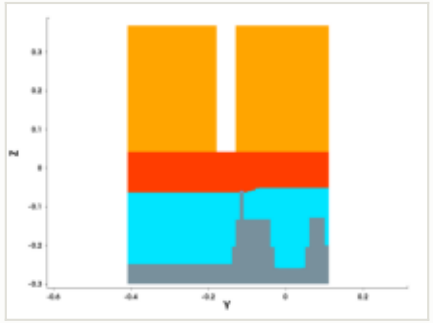

y cut at -0.150 µm

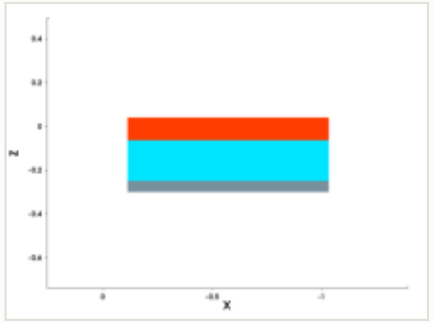

mask for this step

no mask for this step

steps by process area

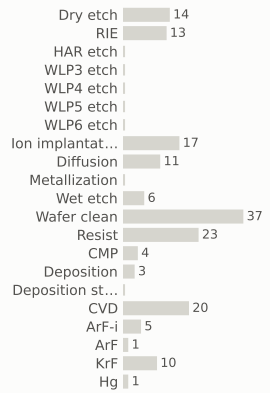

materials deposited (g)

gases emitted (g)

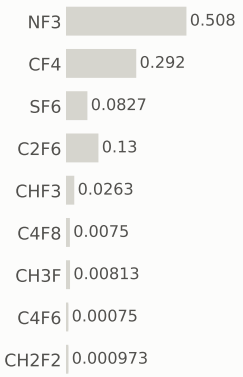

Step #2070: Spx_only

etch_strip · Spx_only

0	116.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

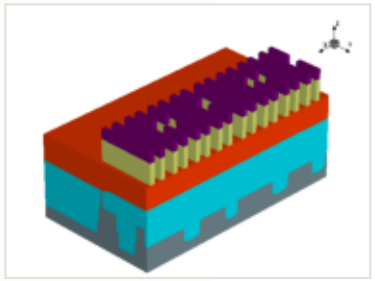

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

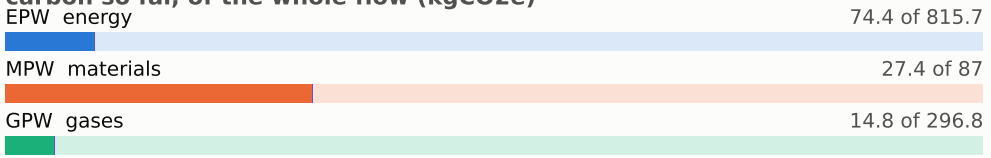

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

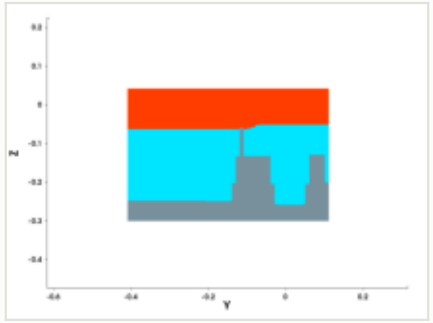

y cut at -0.150 µm

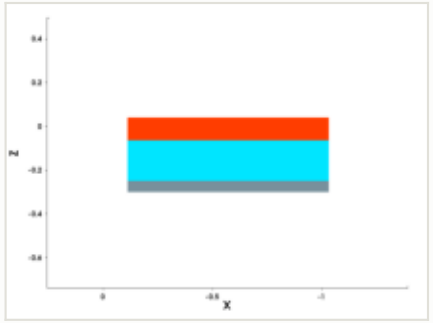

mask for this step

no mask for this step

steps by process area

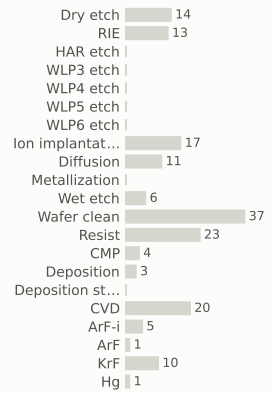

materials deposited (g)

gases emitted (g)

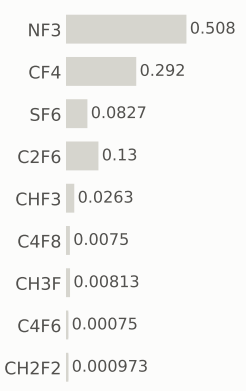

Step #2080: Wafer_clean

clean · Wafer_clean

0.169	116.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

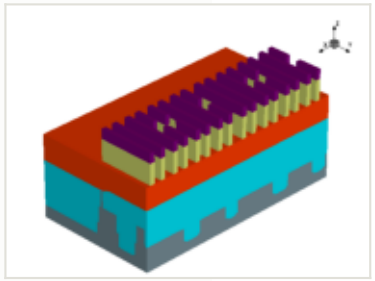

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

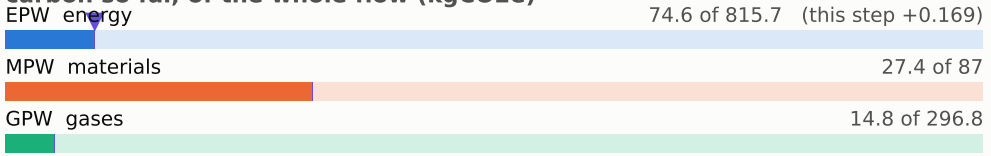

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

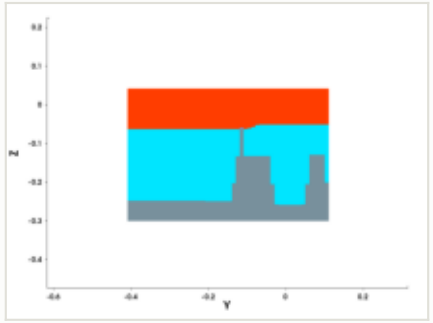

y cut at -0.150 µm

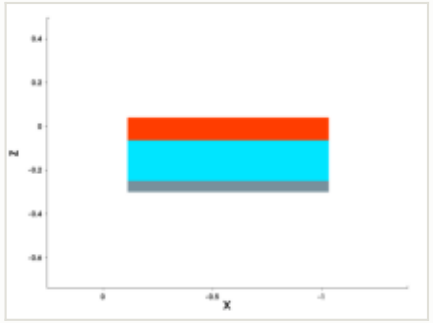

mask for this step

no mask for this step

steps by process area

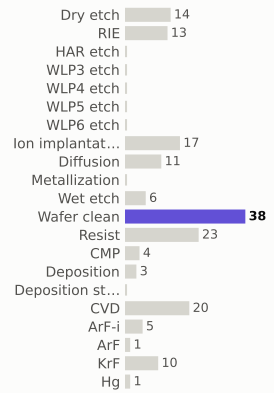

materials deposited (g)

gases emitted (g)

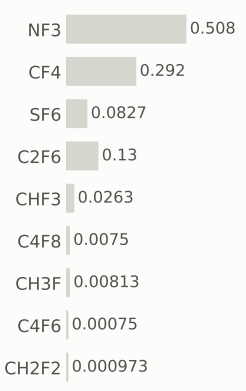

Step #2090: RIE

etch_anisotropic · RIE

1.04	117.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

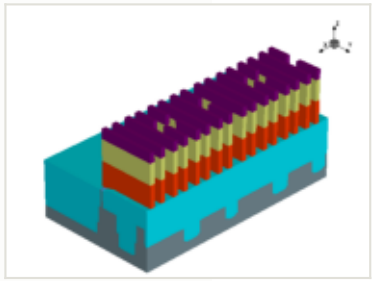

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

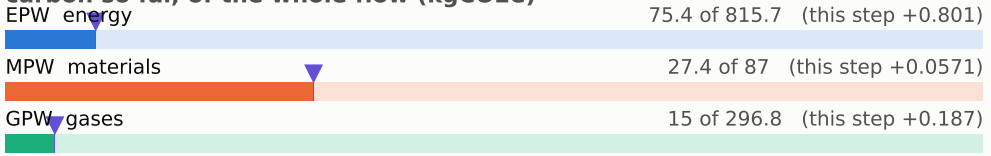

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

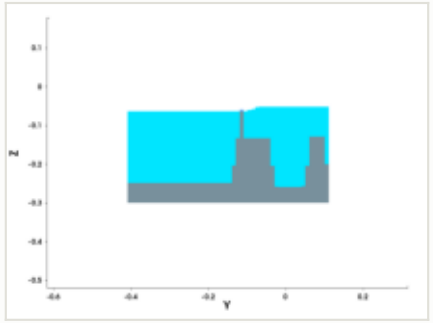

y cut at -0.150 µm

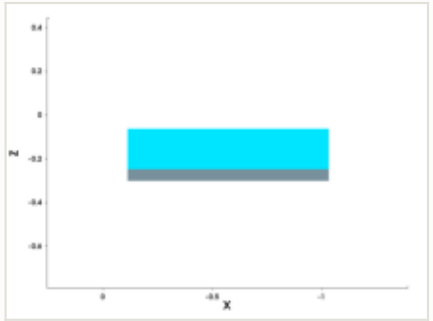

mask for this step

no mask for this step

steps by process area

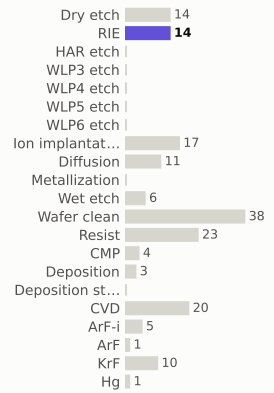

materials deposited (g)

gases emitted (g)

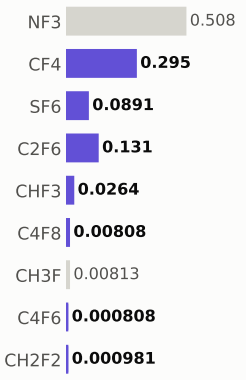

Step #2100: Spx_only

etch_isotropic · Spx_only

0	117.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

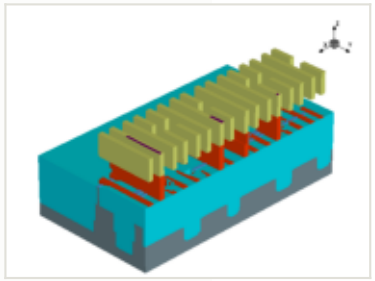

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

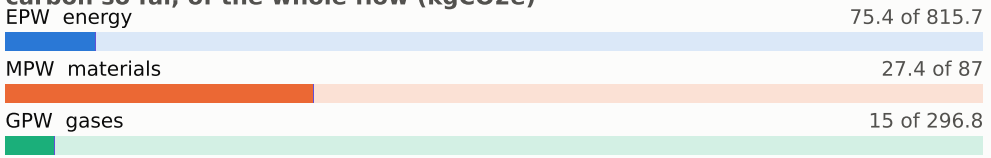

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

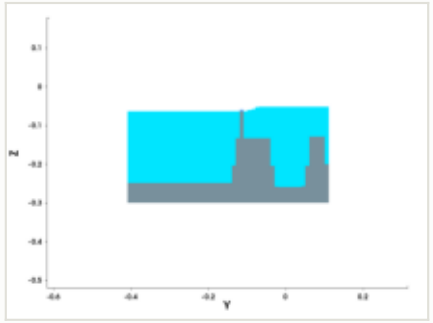

y cut at -0.150 µm

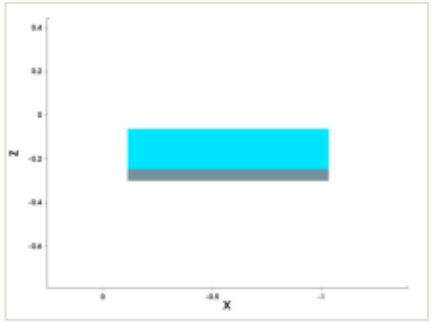

mask for this step

no mask for this step

steps by process area

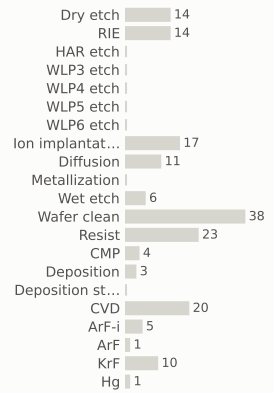

materials deposited (g)

gases emitted (g)

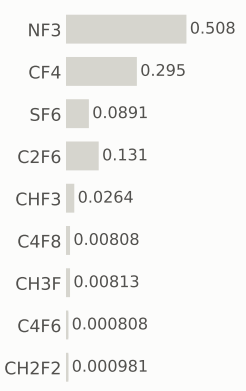

Step #2110: Spx_only

etch_cmp · Spx_only

0	117.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

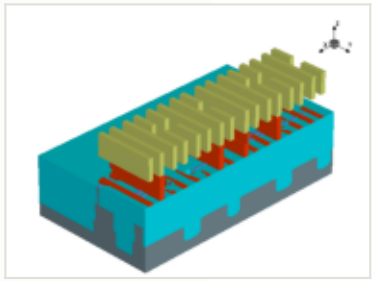

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

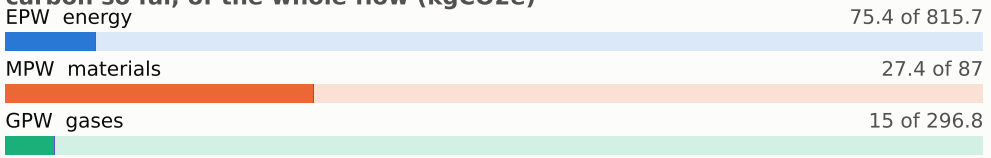

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

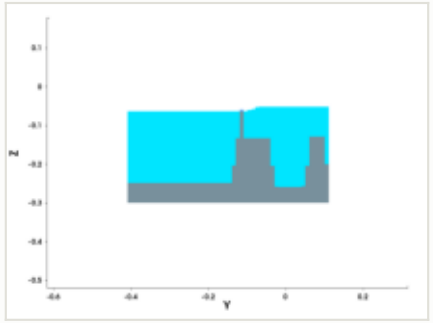

y cut at -0.150 µm

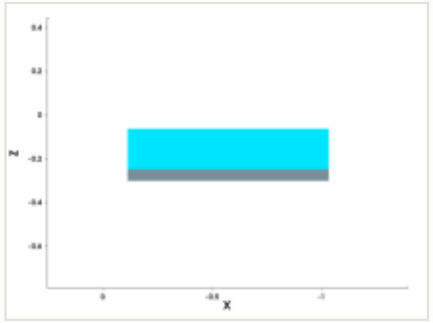

mask for this step

no mask for this step

steps by process area

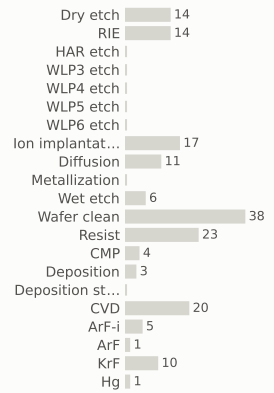

materials deposited (g)

gases emitted (g)

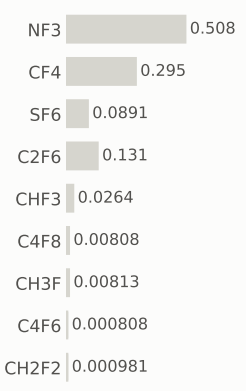

Step #2120: Spx_only

etch_isotropic · Spx_only

0	117.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

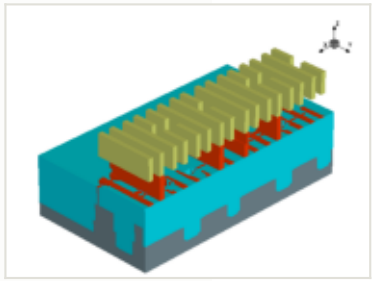

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 75.4 of 815.7

MPW materials 27.4 of 87

GPW gases 15 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

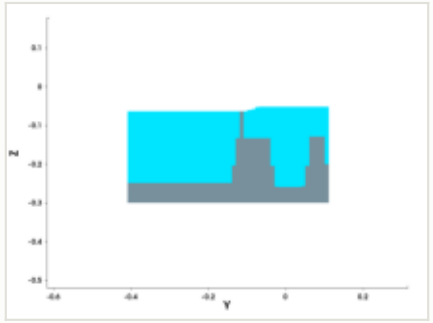

y cut at -0.150 µm

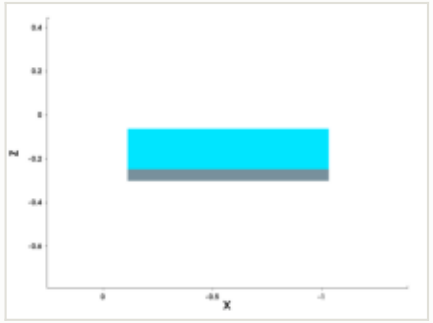

mask for this step

no mask for this step

steps by process area

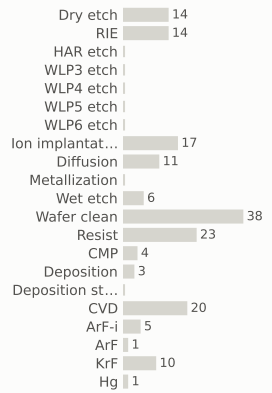

materials deposited (g)



gases emitted (g)

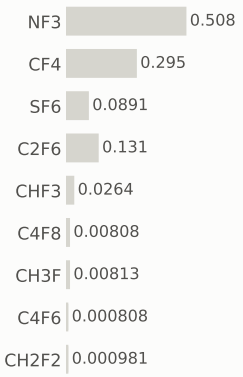

Step #2130: Wafer_clean

clean · Wafer_clean

0.169	118.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

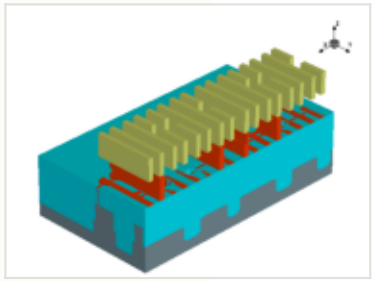

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

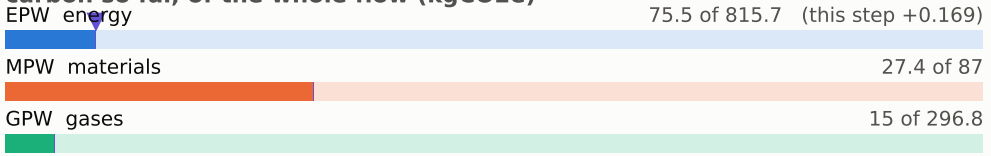

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

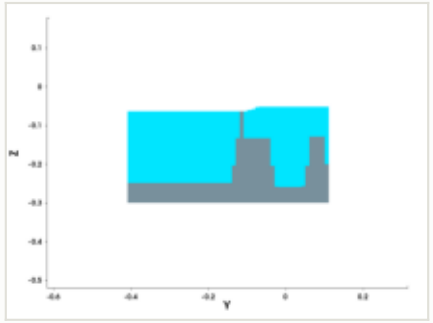

y cut at -0.150 µm

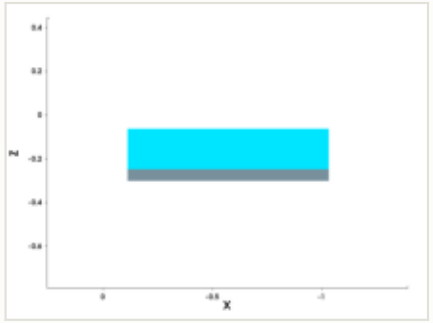

mask for this step

no mask for this step

steps by process area

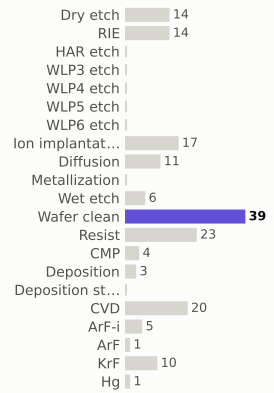

materials deposited (g)

gases emitted (g)

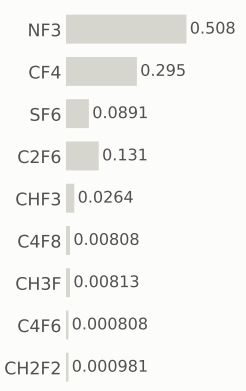

Step #2140: Wafer_clean

clean · Wafer_clean

0.169	118.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

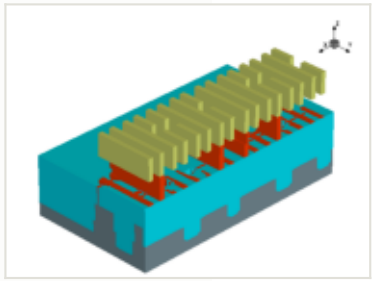

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

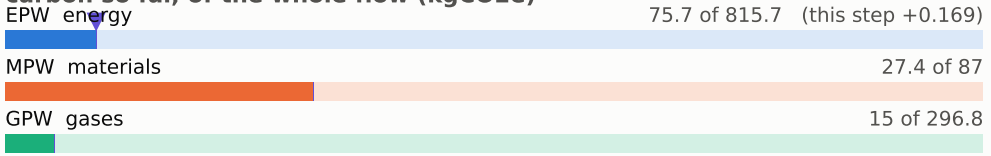

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

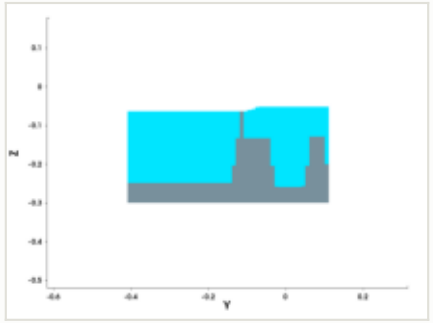

y cut at -0.150 µm

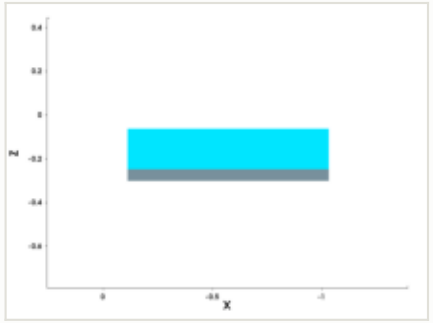

mask for this step

no mask for this step

steps by process area

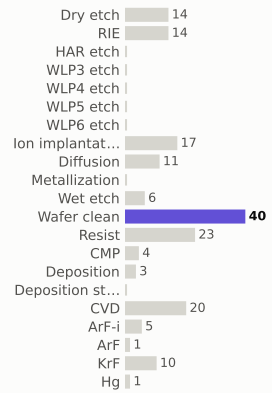

materials deposited (g)

gases emitted (g)

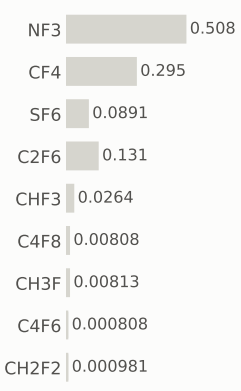

Step #2160: Deposition

depo_isotropic · Deposition

0.656	118.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

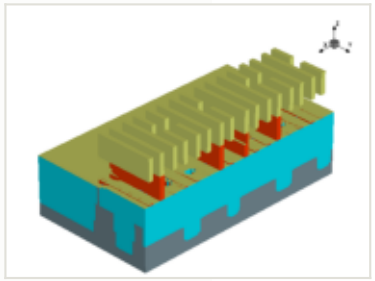

this step

process area	Deposition
material	—
thickness	0.001 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

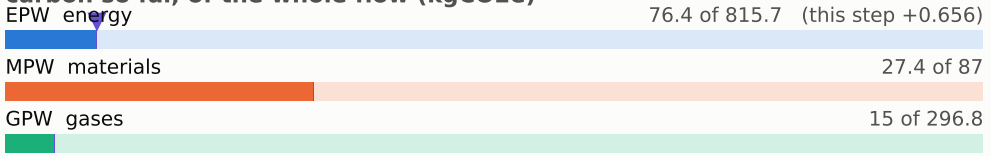

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

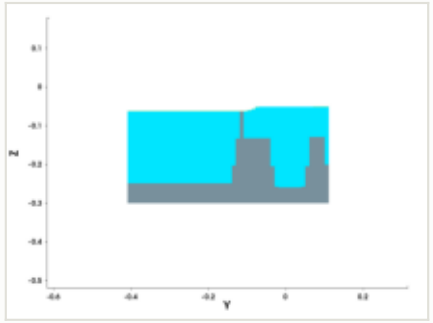

y cut at -0.150 µm

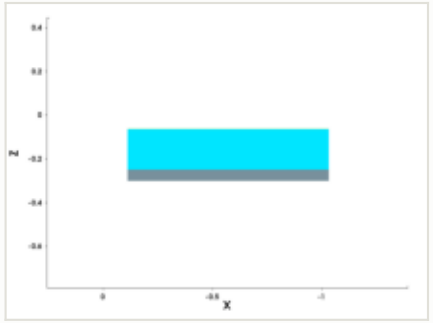

mask for this step

no mask for this step

steps by process area

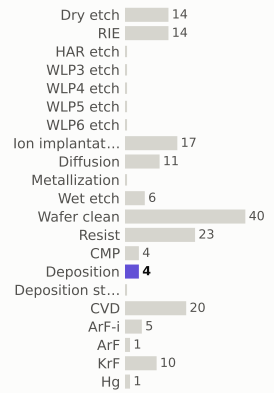

materials deposited (g)

gases emitted (g)

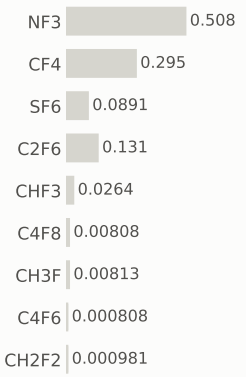

Step #2170: Deposition

depo_isotropic · Deposition

0.656	119.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

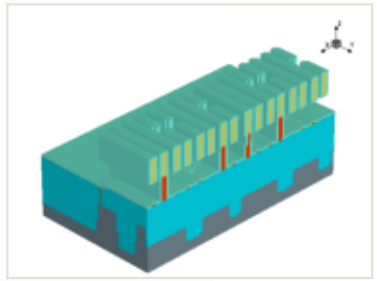

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.006 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

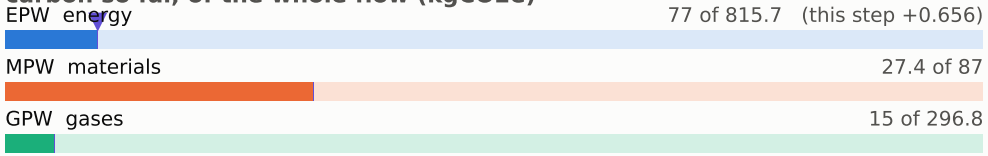

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

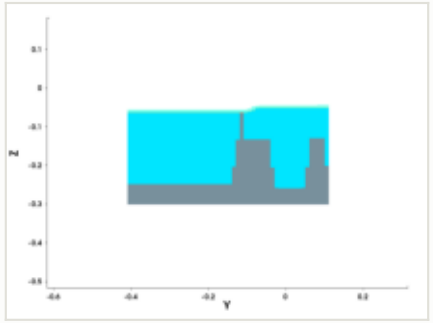

y cut at -0.150 µm

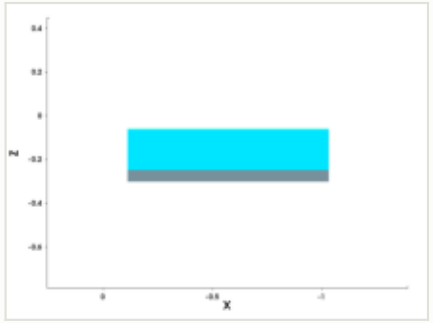

mask for this step

no mask for this step

steps by process area

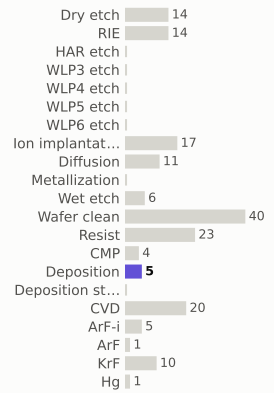

materials deposited (g)

gases emitted (g)

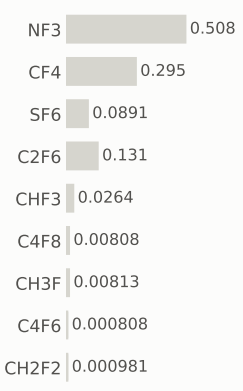

Step #2180: Deposition

depo_isotropic · Deposition

0.656	120.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

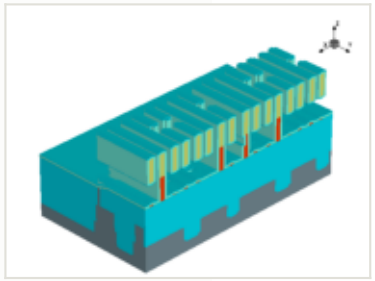

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.003 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

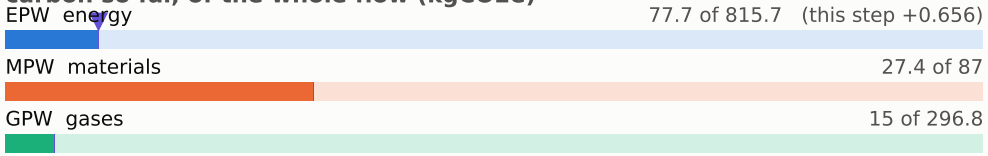

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

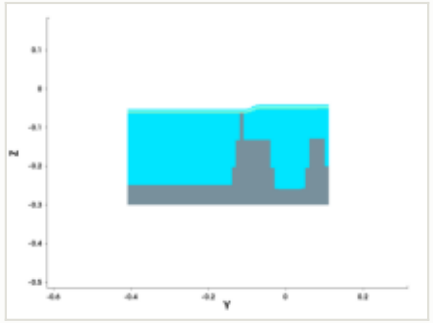

y cut at -0.150 µm

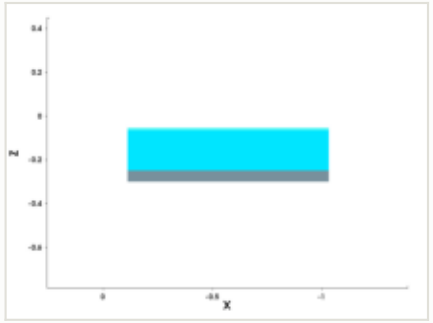

mask for this step

no mask for this step

steps by process area

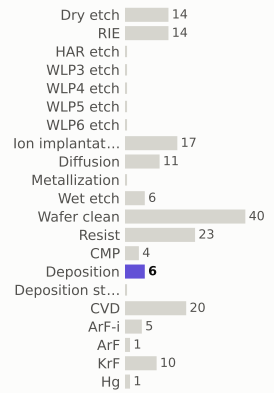

materials deposited (g)

gases emitted (g)

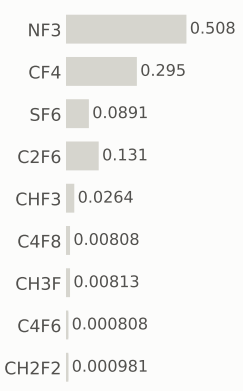

Step #2190: Resist

depo_fill · Resist

0.169	120.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

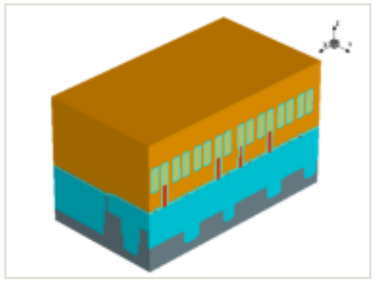

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

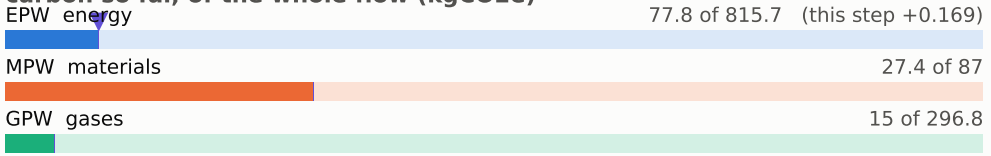

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

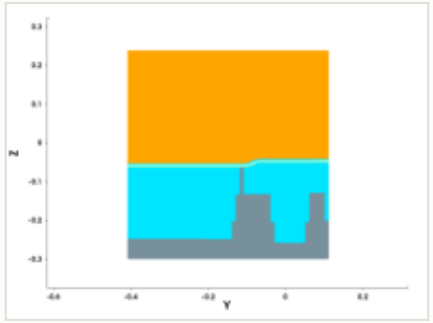

y cut at -0.150 µm

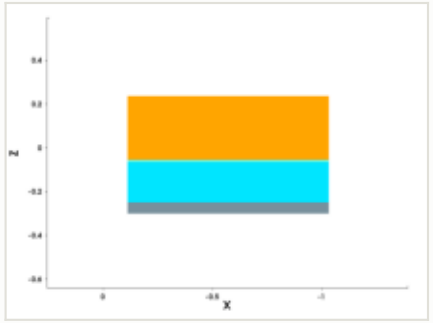

mask for this step

no mask for this step

steps by process area

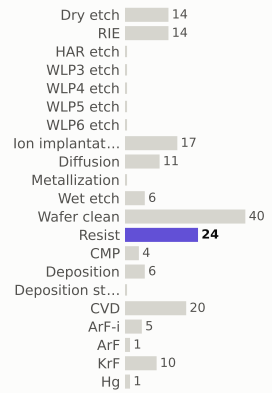

materials deposited (g)

gases emitted (g)

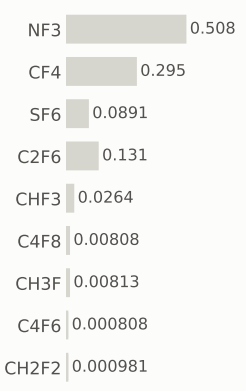

Step #2200: Deposition

depo_isotropic · Deposition

0.656	121.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

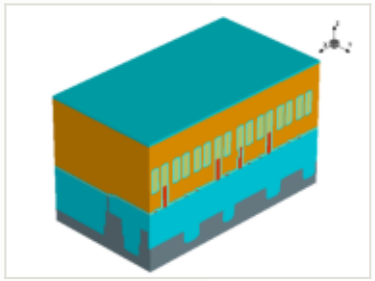

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.01 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

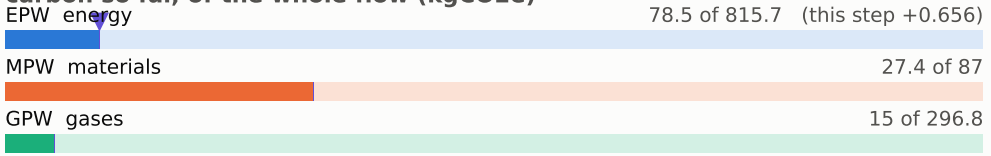

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

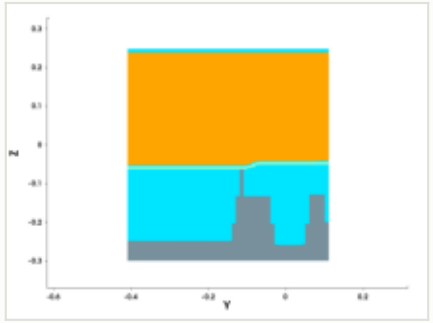

y cut at -0.150 µm

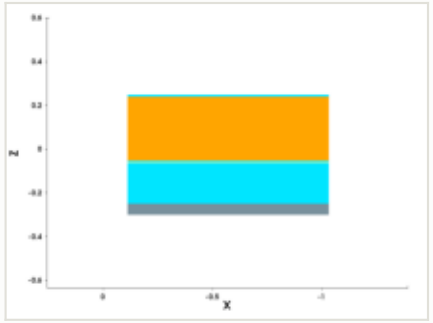

mask for this step

no mask for this step

steps by process area

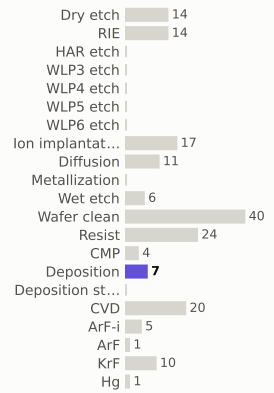

materials deposited (g)

gases emitted (g)

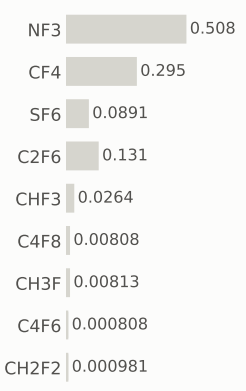

Step #2210: Wafer_clean

clean · Wafer_clean

0.169	121.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

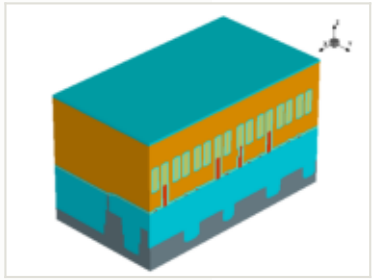

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

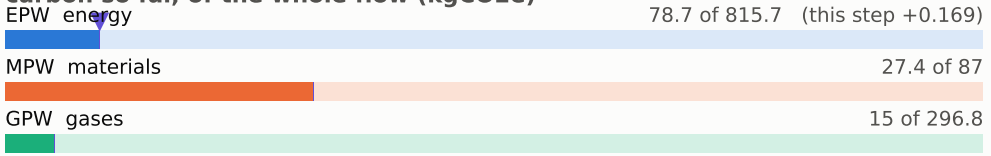

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

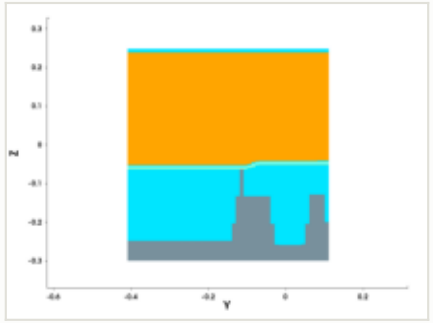

y cut at -0.150 µm

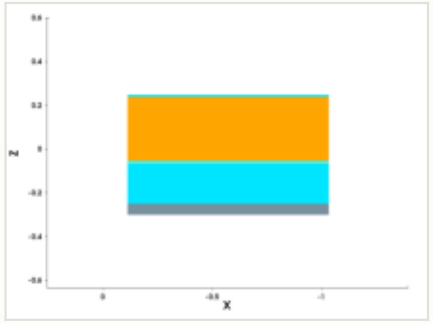

mask for this step

no mask for this step

steps by process area

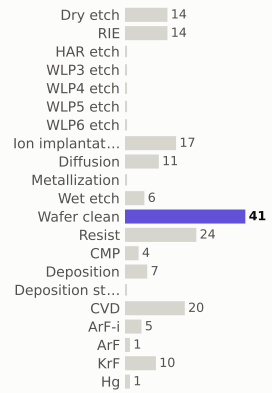

materials deposited (g)

gases emitted (g)

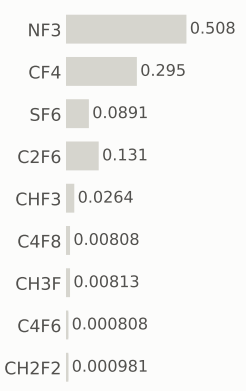

Step #2220: Resist

resist · Resist

0.169	121.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

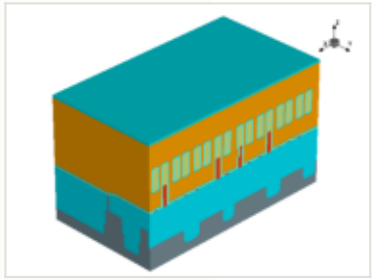

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

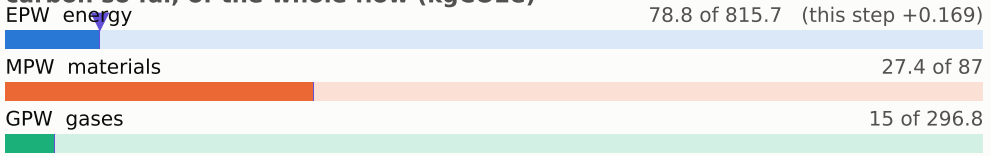

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

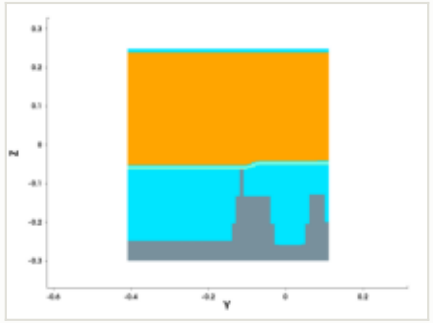

y cut at -0.150 µm

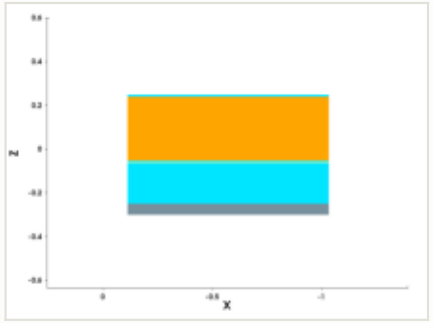

mask for this step

no mask for this step

steps by process area

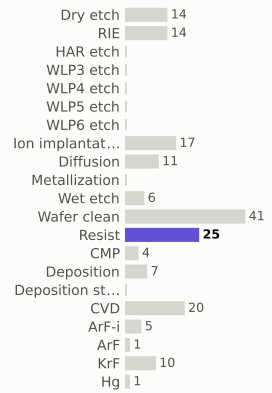

materials deposited (g)

gases emitted (g)

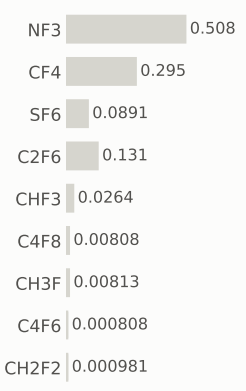

Step #2230: ArF-i

litho_patterning · ArF-i

0.217	121.5	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

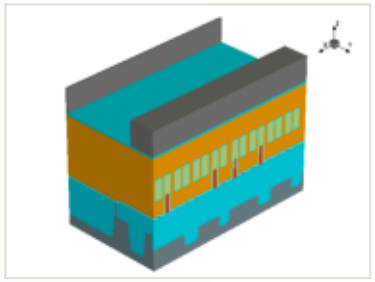

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

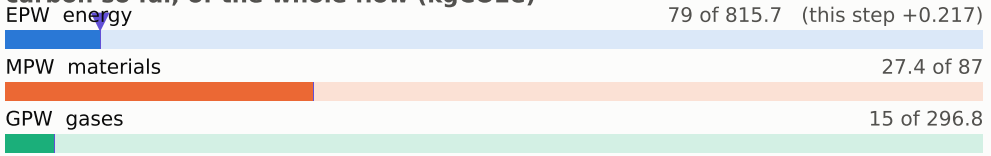

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

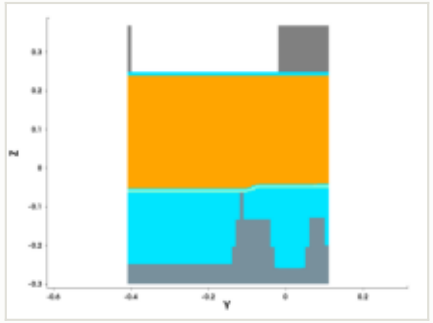

y cut at -0.150 µm

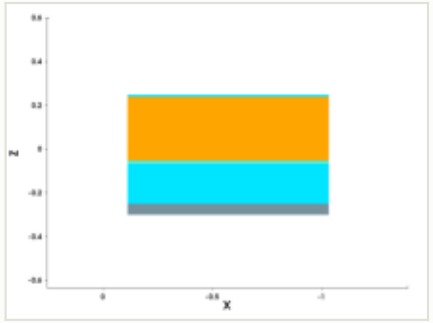

mask: layer 2013:0, positive (GDSII)

steps by process area

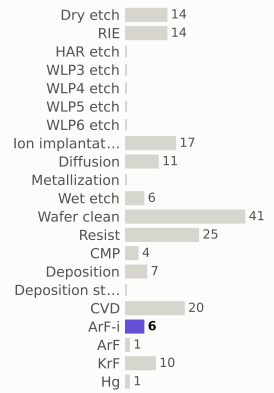

materials deposited (g)

gases emitted (g)

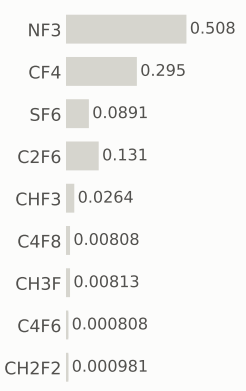

Step #2240: RIE

etch_anisotropic · RIE

1.04	122.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

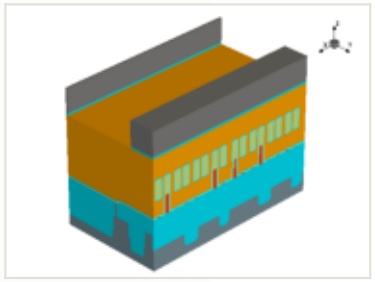

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 79.8 of 815.7 (this step +0.801)

MPW materials — 27.5 of 87 (this step +0.0571)

GPW gases — 15.2 of 296.8 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

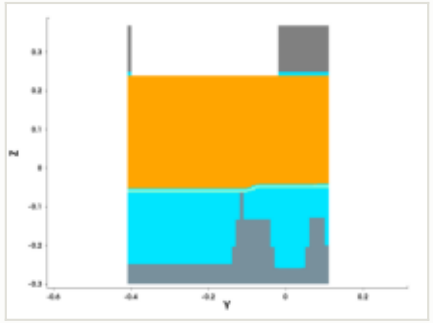

y cut at -0.150 µm

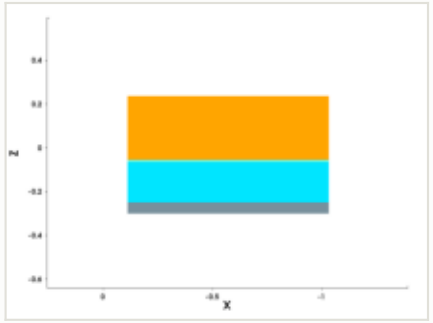

mask for this step

no mask for this step

steps by process area

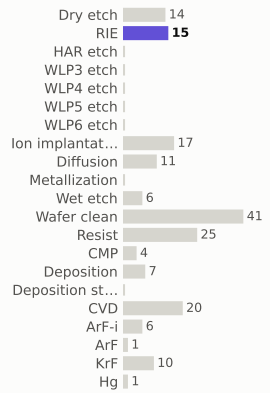

materials deposited (g)

gases emitted (g)

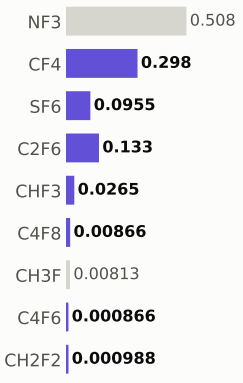

Step #2250: Spx_only

etch_anisotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

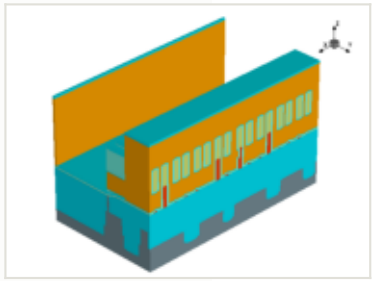

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 79.8 of 815.7

MPW materials 27.5 of 87

GPW gases 15.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

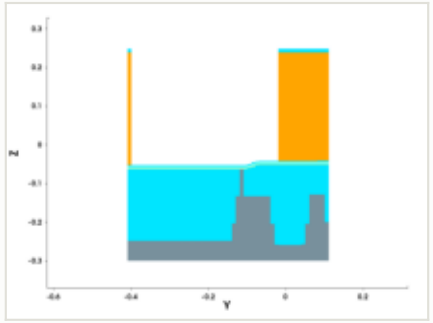

y cut at -0.150 µm

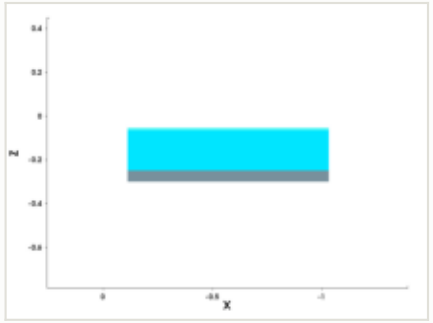

mask for this step

no mask for this step

steps by process area

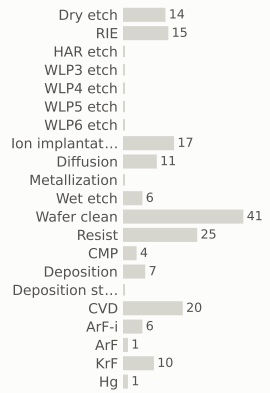

materials deposited (g)

gases emitted (g)

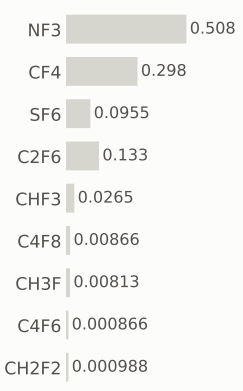

Step #2260: Spx_only

etch_isotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

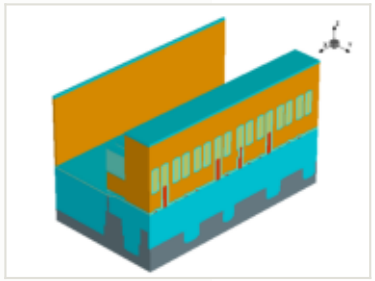

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

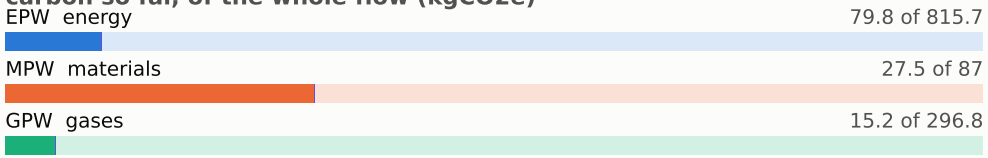

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

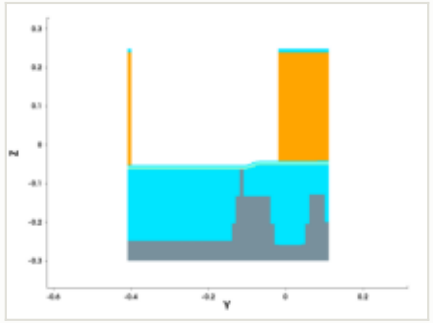

y cut at -0.150 µm

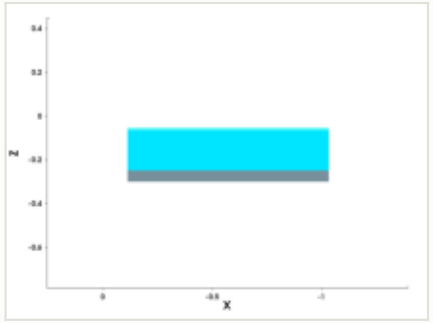

mask for this step

no mask for this step

steps by process area

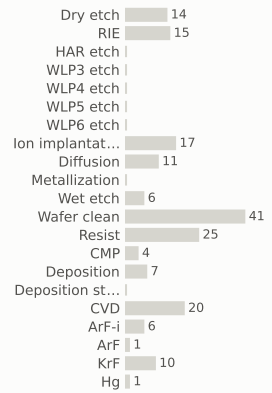

materials deposited (g)

gases emitted (g)

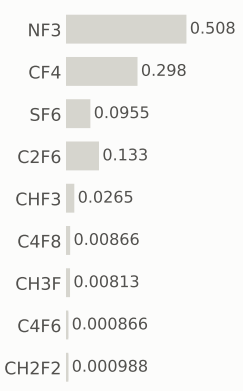

Step #2270: Spx_only

etch_anisotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

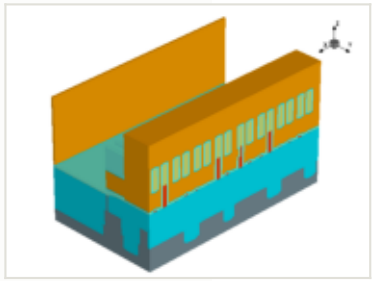

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

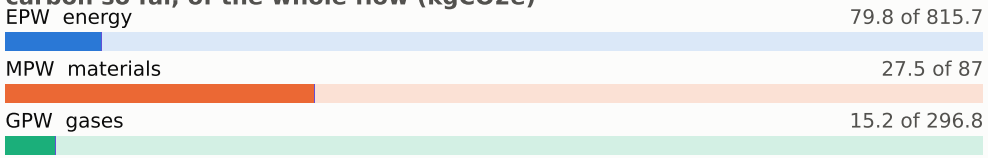

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

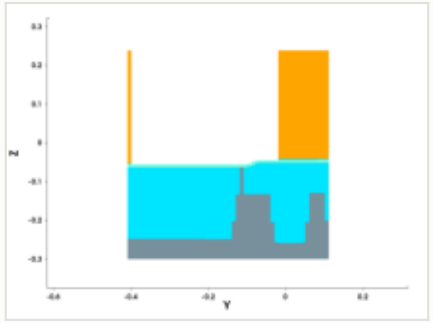

y cut at -0.150 µm

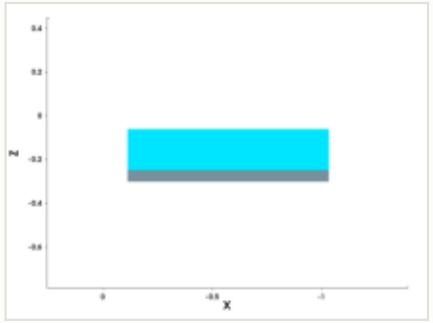

mask for this step

no mask for this step

steps by process area

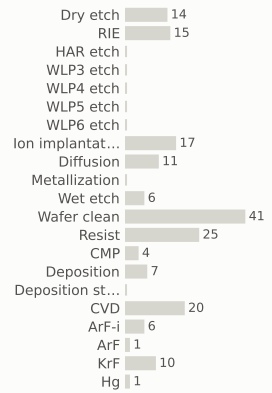

materials deposited (g)

gases emitted (g)

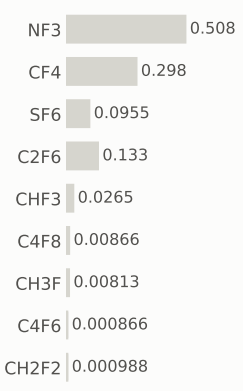

Step #2280: Spx_only

etch_isotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

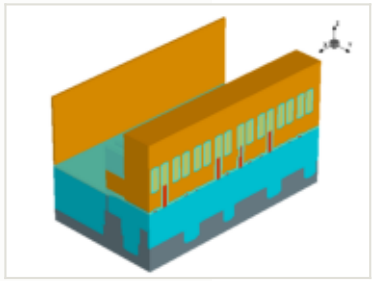

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 79.8 of 815.7

MPW materials 27.5 of 87

GPW gases 15.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

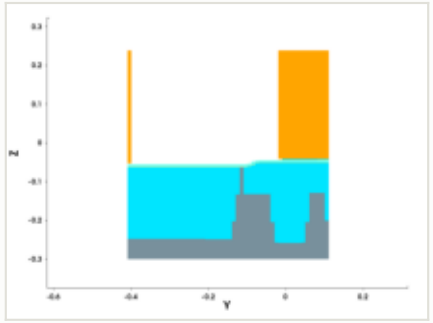

y cut at -0.150 µm

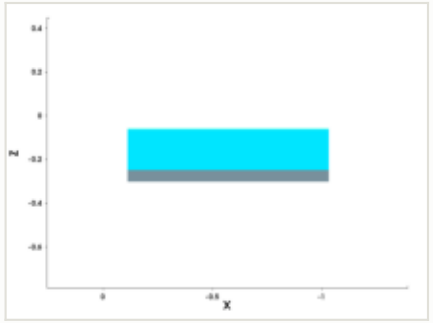

mask for this step

no mask for this step

steps by process area

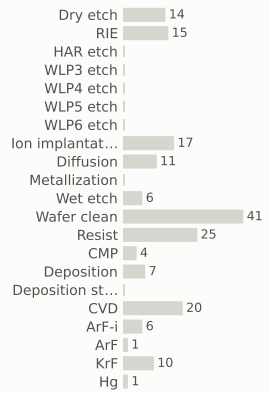

materials deposited (g)

gases emitted (g)

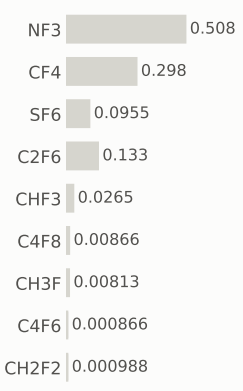

Step #2290: Spx_only

etch_anisotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

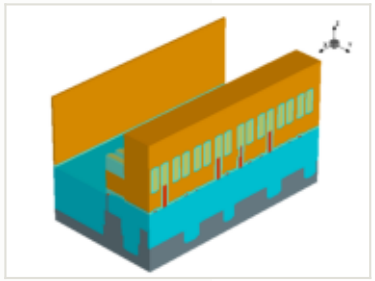

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

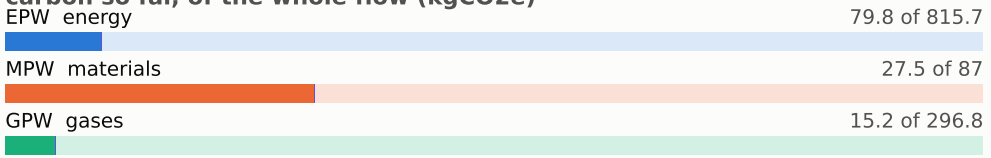

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

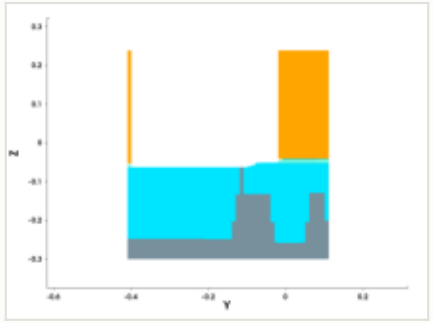

y cut at -0.150 µm

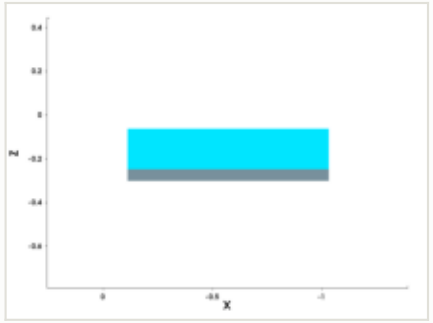

mask for this step

no mask for this step

steps by process area

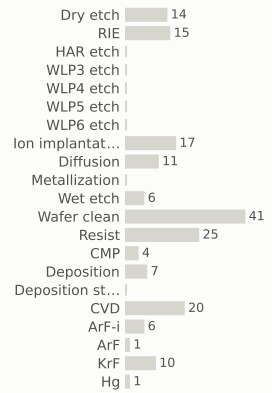

materials deposited (g)

gases emitted (g)

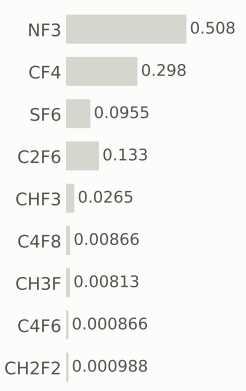

Step #2300: Spx_only

etch_anisotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

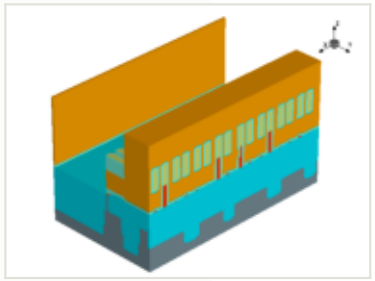

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 79.8 of 815.7

MPW materials 27.5 of 87

GPW gases 15.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

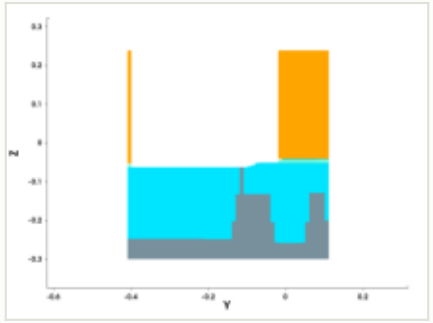

y cut at -0.150 µm

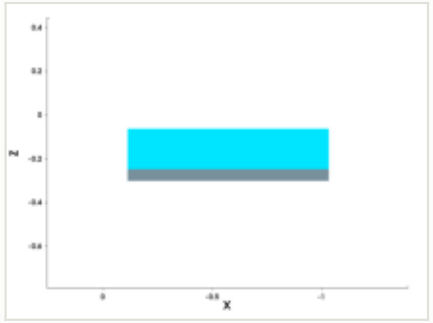

mask for this step

no mask for this step

steps by process area

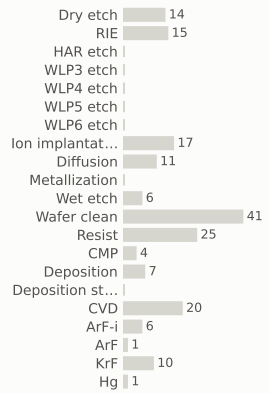

materials deposited (g)

gases emitted (g)

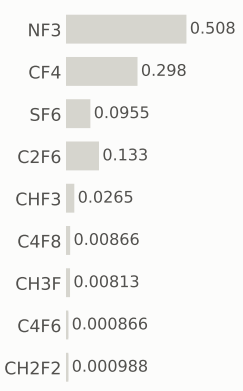

Step #2310: Spx_only

etch_anisotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

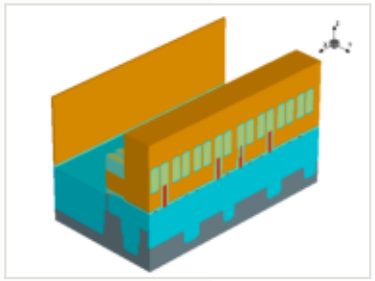

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 79.8 of 815.7

MPW materials 27.5 of 87

GPW gases 15.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

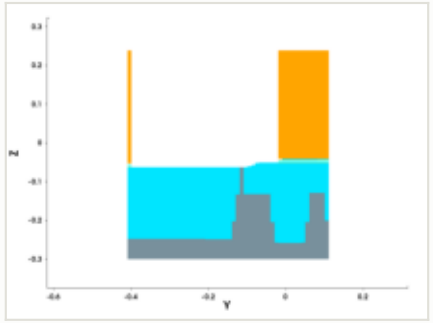

y cut at -0.150 µm

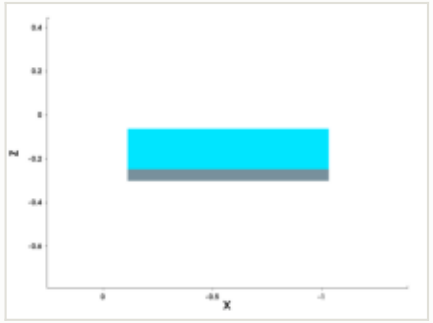

mask for this step

no mask for this step

steps by process area

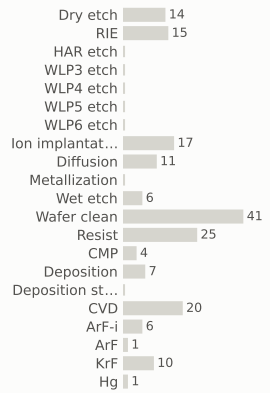

materials deposited (g)

gases emitted (g)

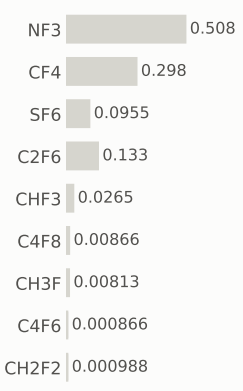

Step #2320: Spx_only

etch_microloading · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

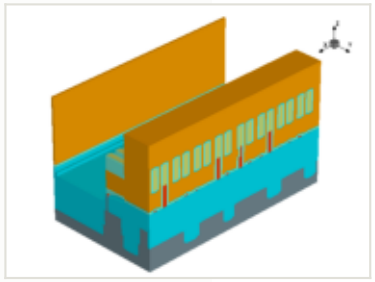

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

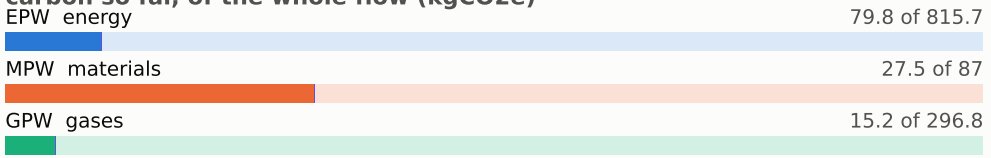

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

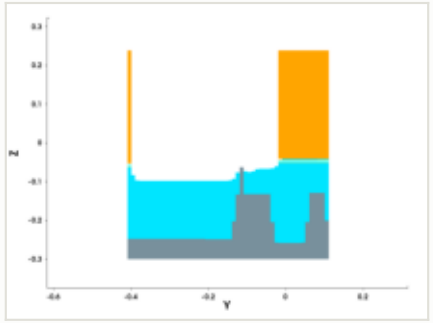

y cut at -0.150 µm

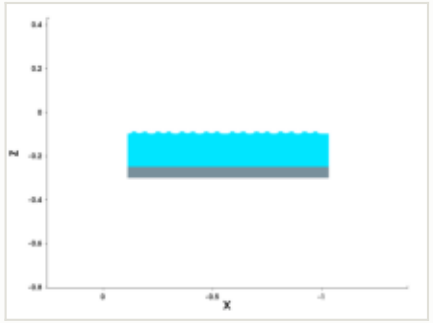

mask for this step

no mask for this step

steps by process area

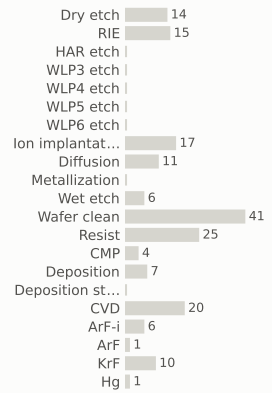

materials deposited (g)

gases emitted (g)

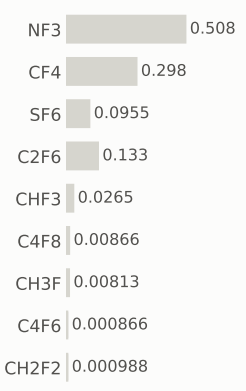

Step #2330: Spx_only

etch_anisotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

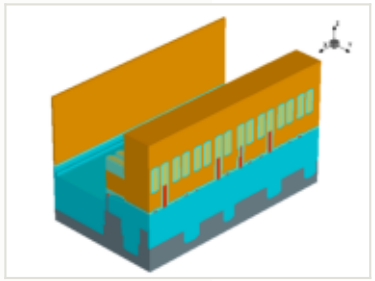

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 79.8 of 815.7

MPW materials 27.5 of 87

GPW gases 15.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

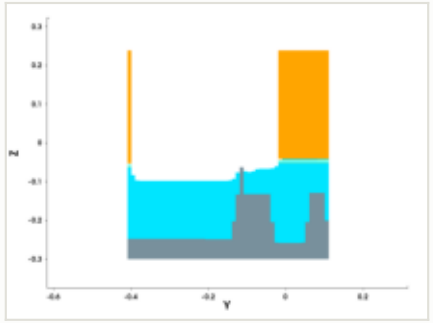

y cut at -0.150 µm

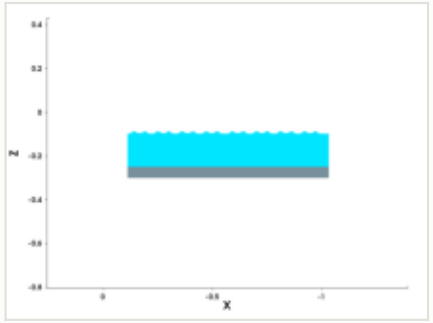

mask for this step

no mask for this step

steps by process area

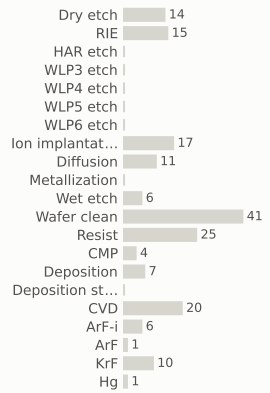

materials deposited (g)

gases emitted (g)

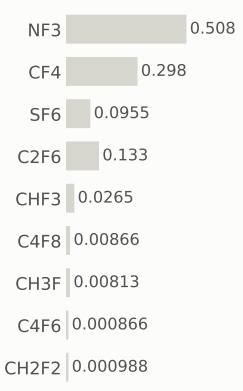

Step #2340: Spx_only

etch_isotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

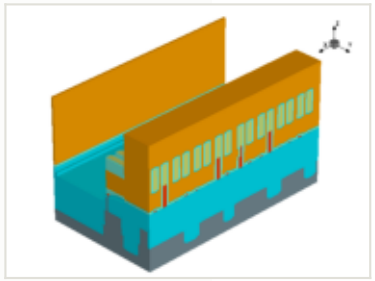

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

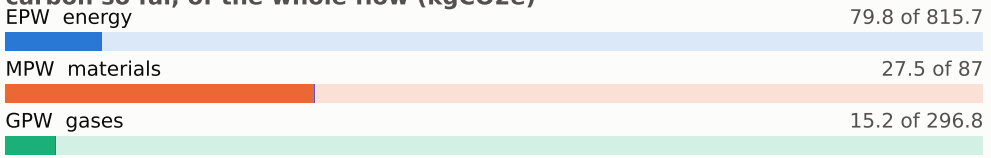

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

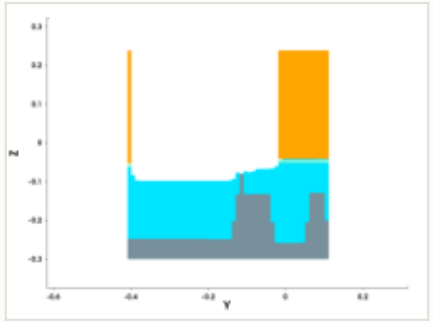

y cut at -0.150 µm

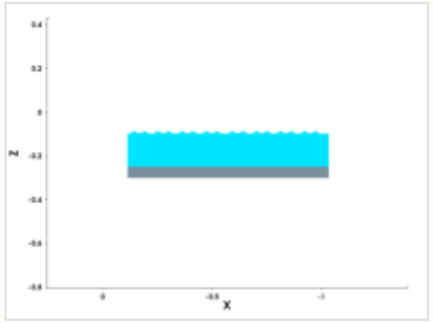

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

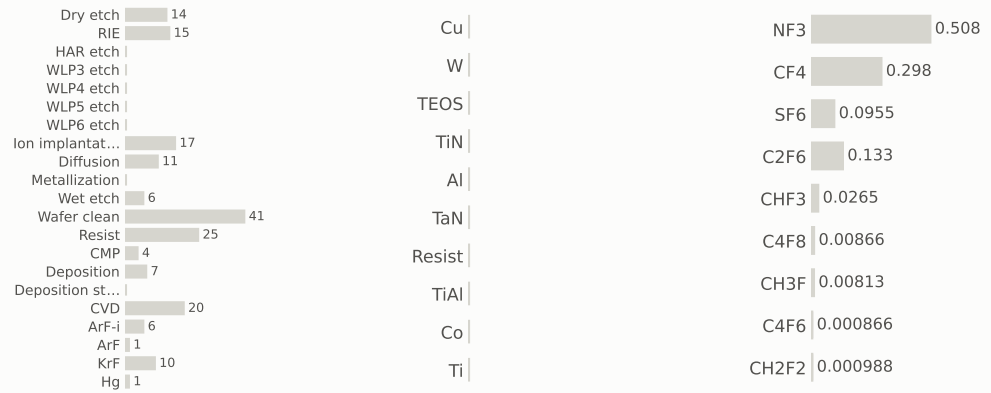

Step #2350: Spx_only

etch_anisotropic · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

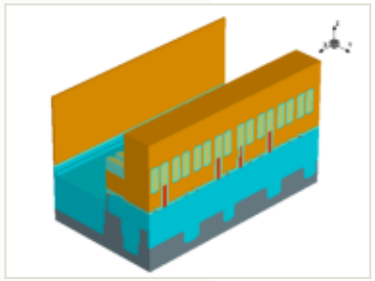

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 79.8 of 815.7

MPW materials 27.5 of 87

GPW gases 15.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

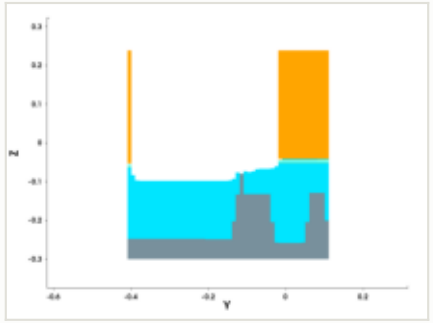

y cut at -0.150 µm

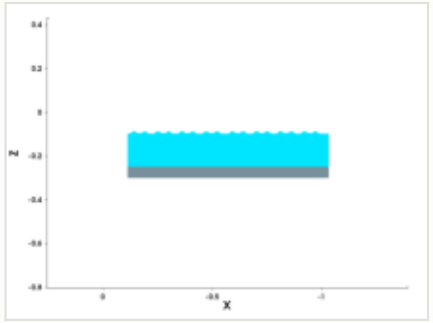

mask for this step

no mask for this step

steps by process area

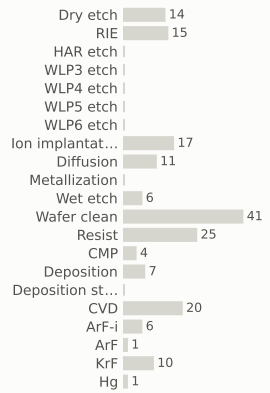

materials deposited (g)

gases emitted (g)

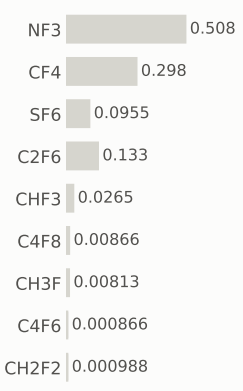

Step #2360: Spx_only

etch_strip · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

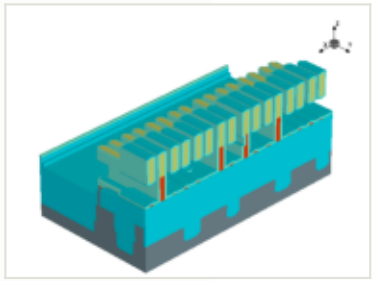

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 79.8 of 815.7

MPW materials 27.5 of 87

GPW gases 15.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

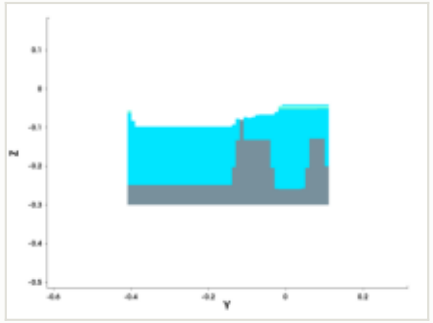

y cut at -0.150 µm

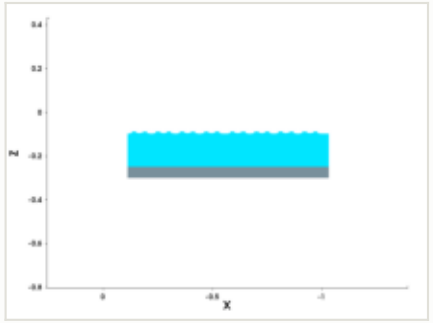

mask for this step

no mask for this step

steps by process area

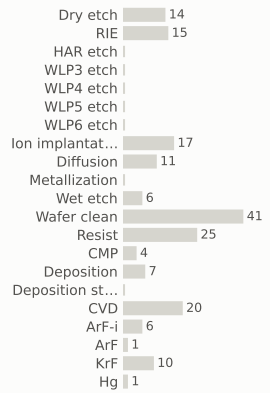

materials deposited (g)

gases emitted (g)

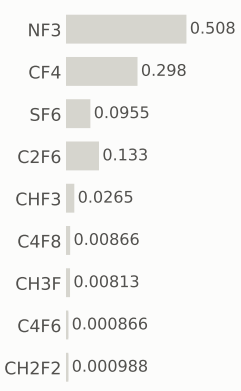

Step #2370: Spx_only

etch_ellipsoidal · Spx_only

0	122.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

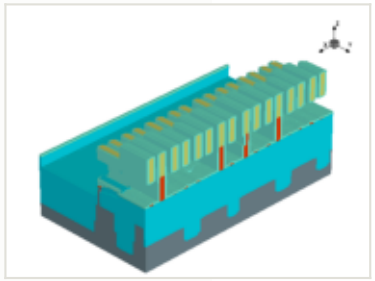

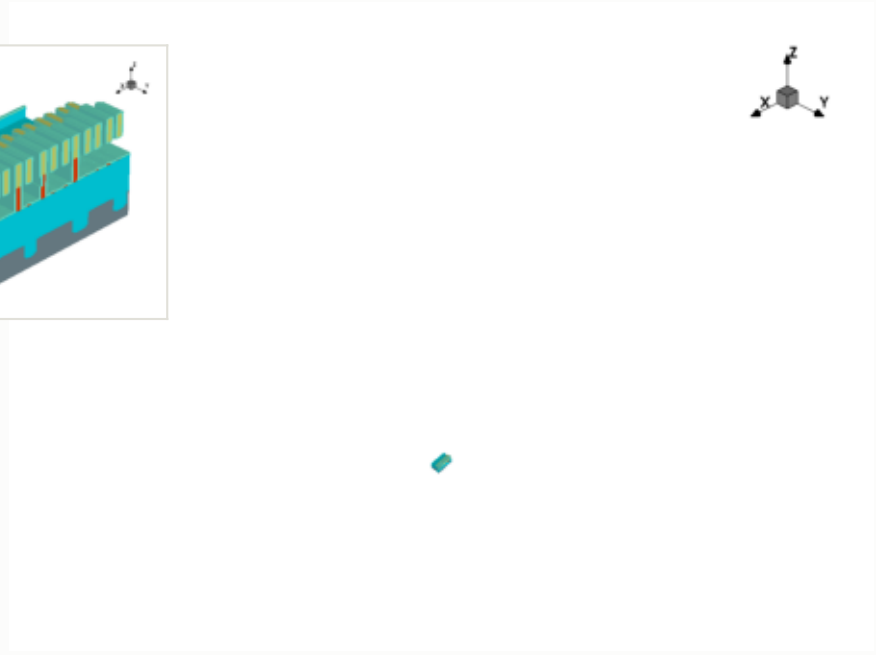

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

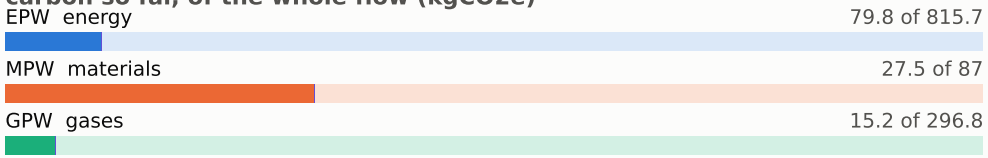

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

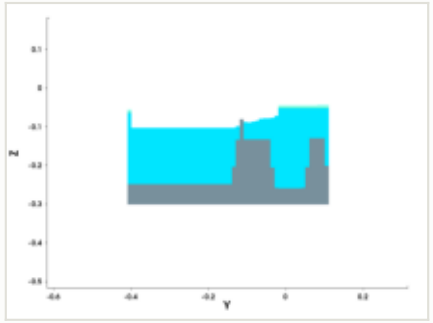

y cut at -0.150 µm

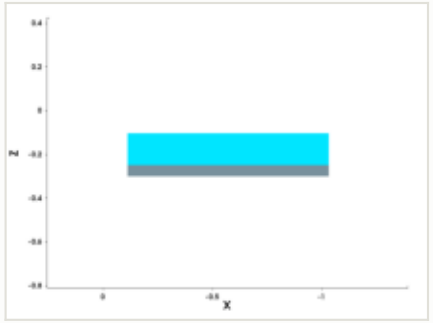

mask for this step

no mask for this step

steps by process area

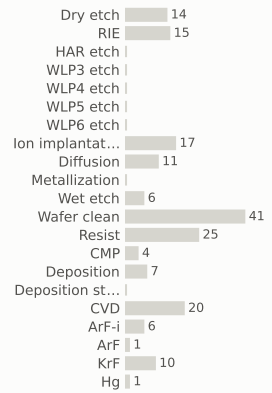

materials deposited (g)

gases emitted (g)

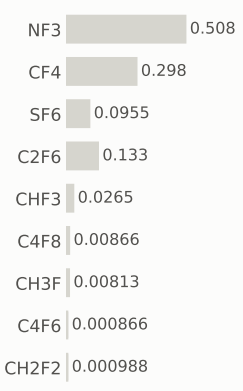

Step #2380: Wafer_clean

clean · Wafer_clean

0.169	122.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

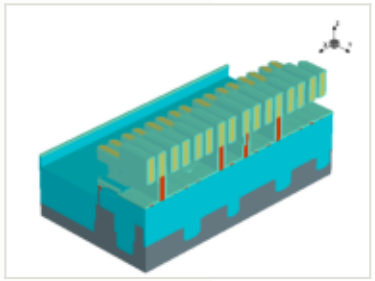

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

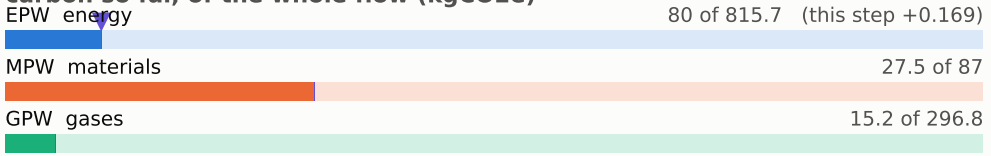

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

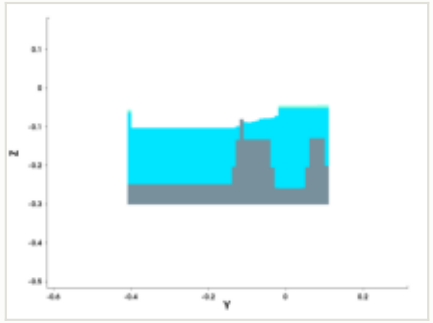

y cut at -0.150 µm

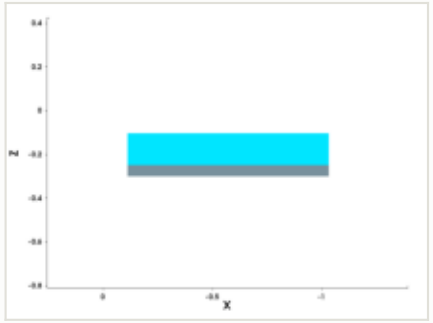

mask for this step

no mask for this step

steps by process area

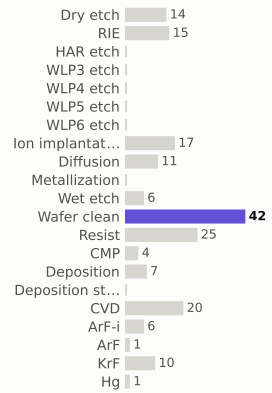

materials deposited (g)

gases emitted (g)

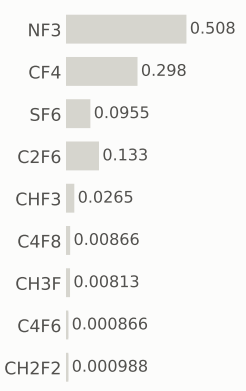

Step #2390: CVD

depo_epi · CVD

1.31	124.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

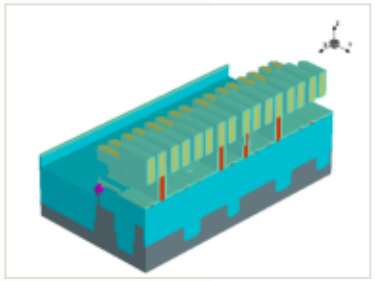

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

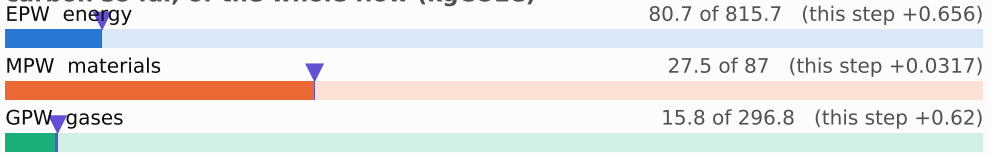

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

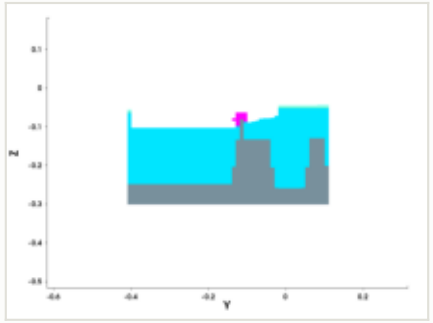

y cut at -0.150 µm

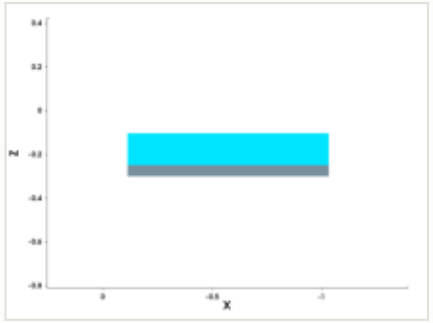

mask for this step

no mask for this step

steps by process area

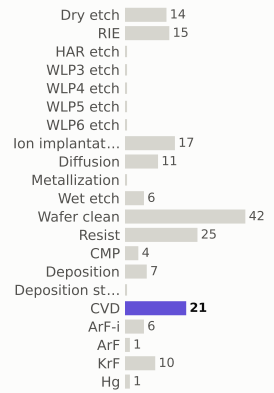

materials deposited (g)

gases emitted (g)

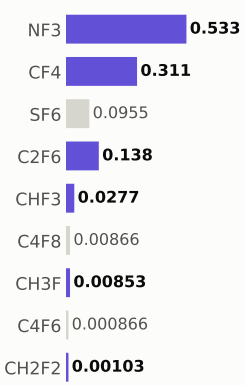

Step #2400: Spx_only

depo_epi · Spx_only

0	124.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

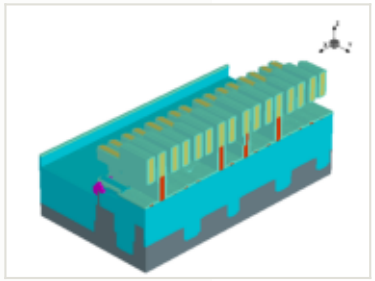

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.008 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 80.7 of 815.7

MPW materials 27.5 of 87

GPW gases 15.8 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

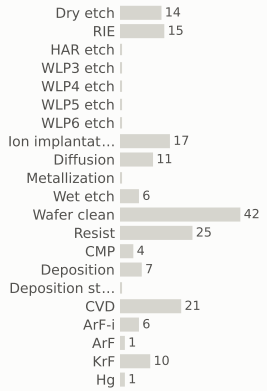

materials deposited (g)

gases emitted (g)

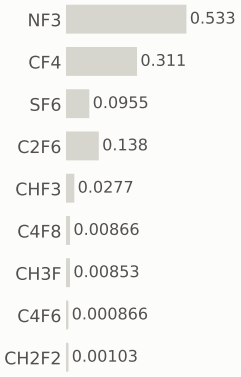

x cut at -0.570 µm

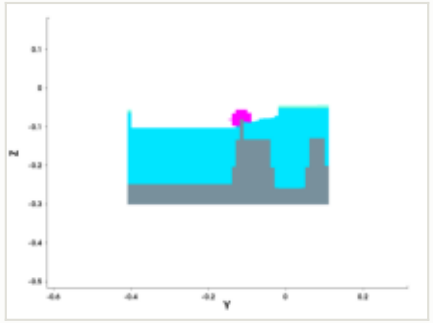

y cut at -0.150 µm

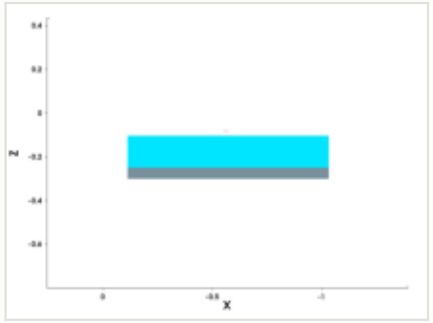

mask for this step

no mask for this step

Step #2410: Wafer_clean

clean · Wafer_clean

0.169	124.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

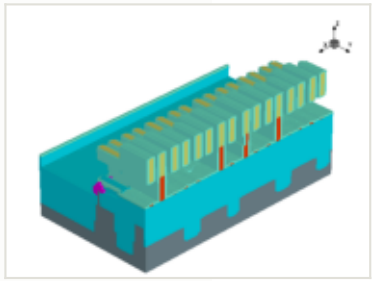

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

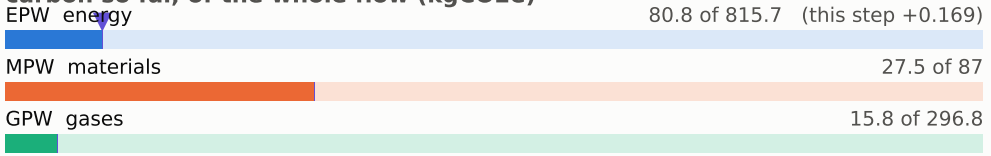

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

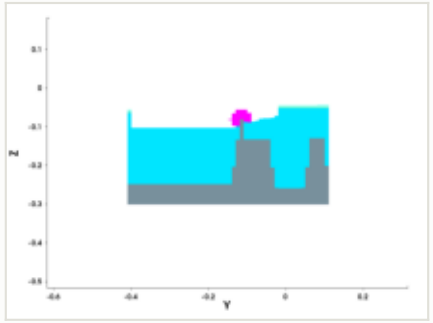

y cut at -0.150 µm

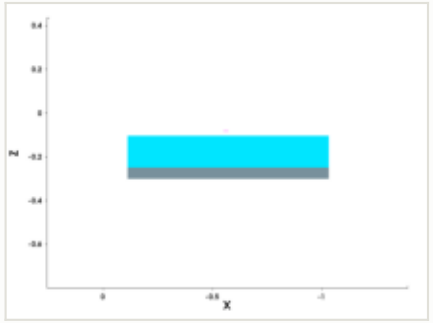

mask for this step

no mask for this step

steps by process area

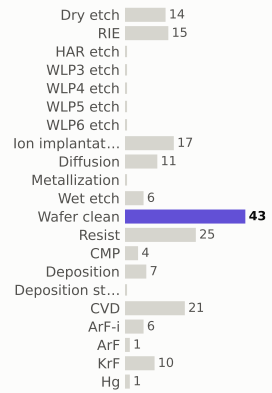

materials deposited (g)

gases emitted (g)

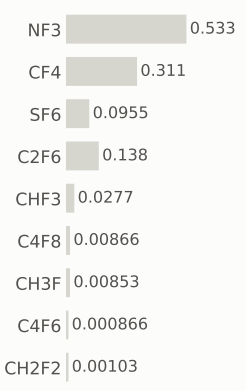

Step #2420: Deposition

depo_isotropic · Deposition

0.656	124.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

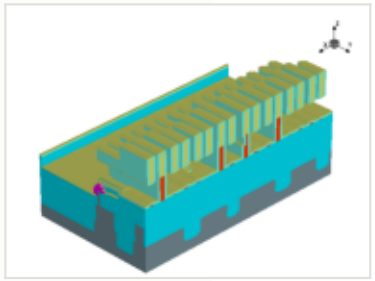

this step

process area	Deposition
material	—
thickness	0.0025 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

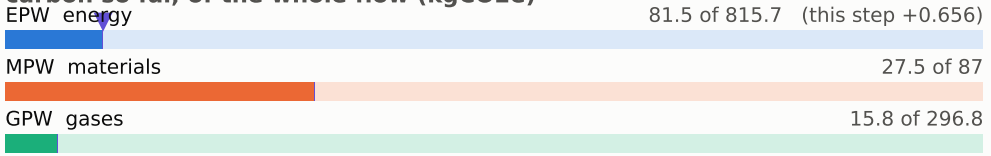

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

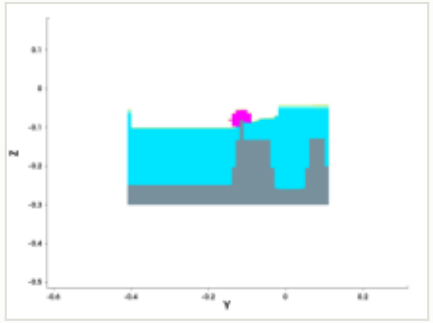

y cut at -0.150 µm

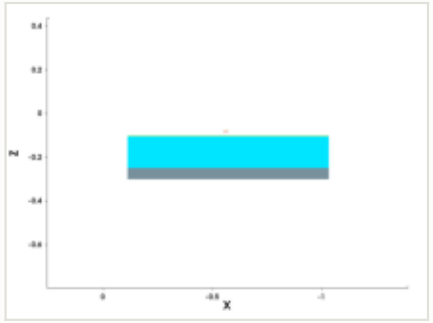

mask for this step

no mask for this step

steps by process area

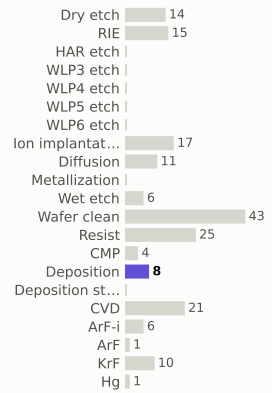

materials deposited (g)

gases emitted (g)

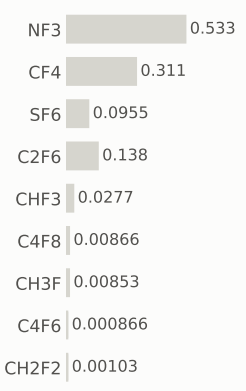

Step #2430: Resist

depo_fill · Resist

0.169	125.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

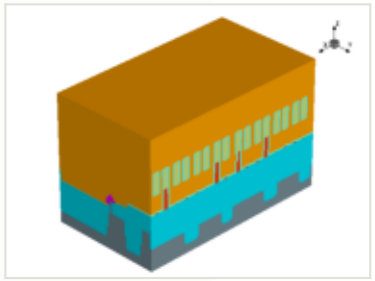

this step

process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

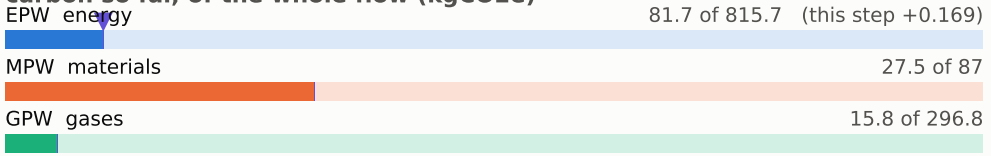

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

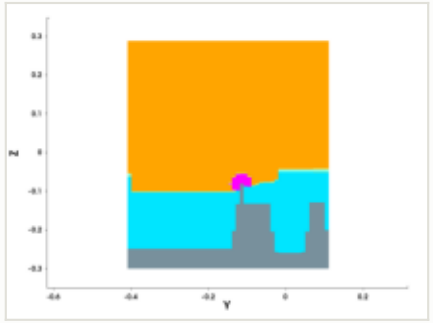

y cut at -0.150 µm

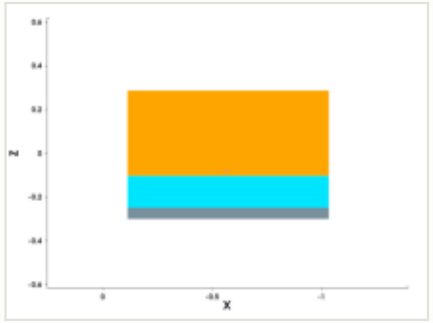

mask for this step

no mask for this step

steps by process area

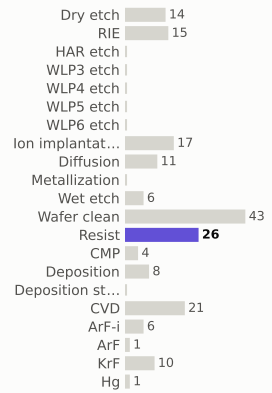

materials deposited (g)

gases emitted (g)

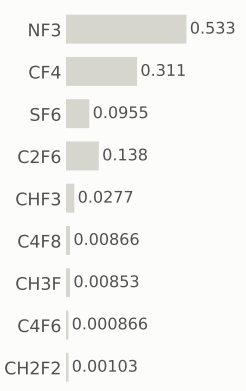

Step #2440: Deposition

depo_isotropic · Deposition

0.656	125.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

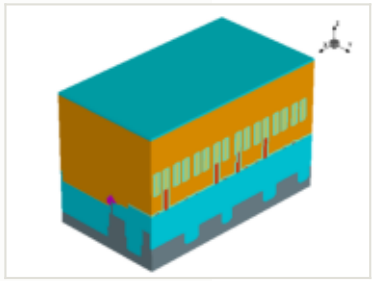

this step

process area	Deposition
material	—
thickness	0.01 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

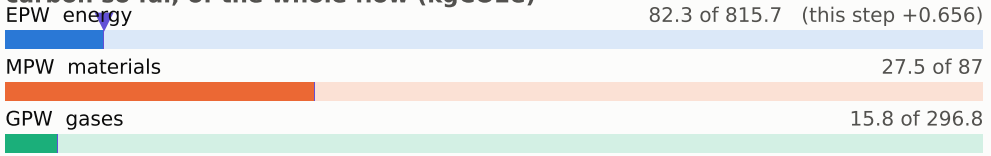

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

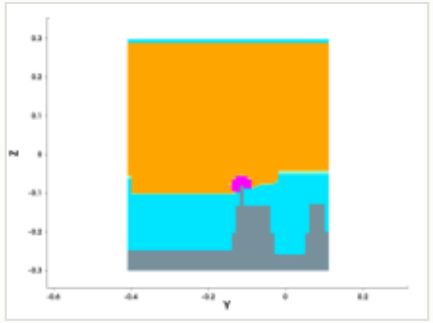

y cut at -0.150 µm

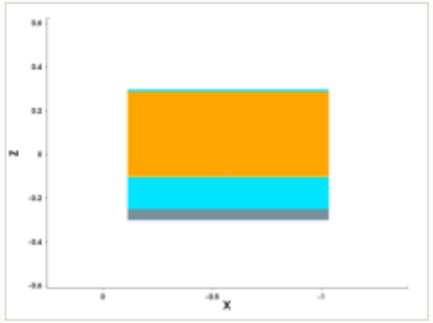

mask for this step

no mask for this step

steps by process area

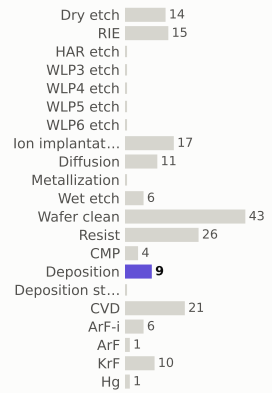

materials deposited (g)

gases emitted (g)

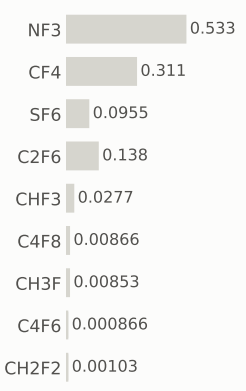

Step #2450: Wafer_clean

clean · Wafer_clean

0.169	125.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

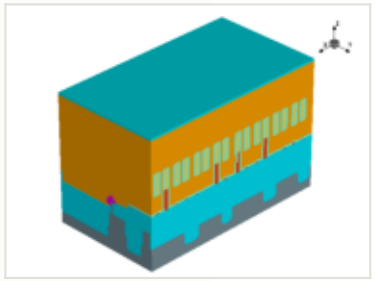

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

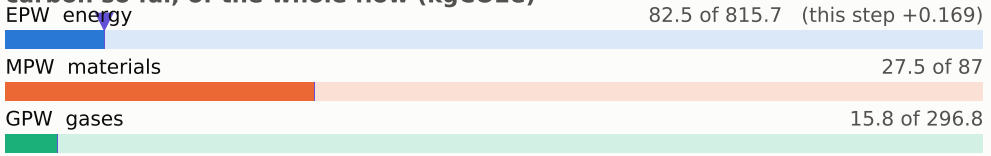

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

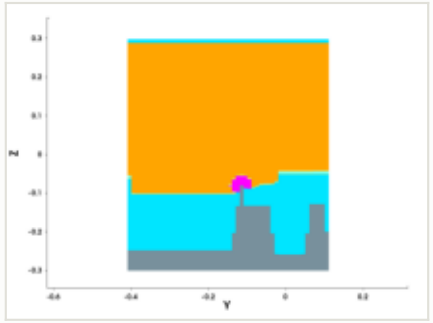

y cut at -0.150 µm

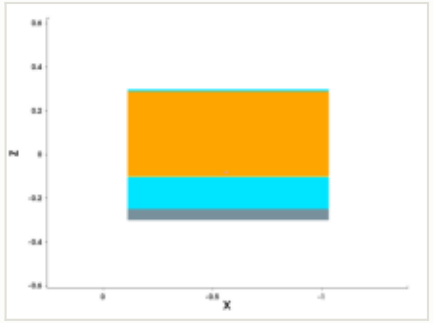

mask for this step

no mask for this step

steps by process area

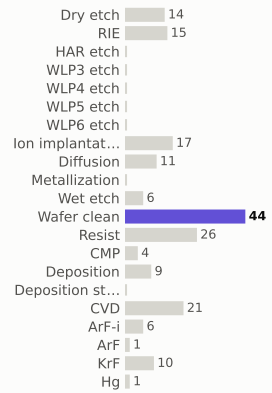

materials deposited (g)

gases emitted (g)

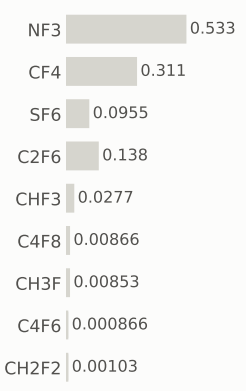

Step #2460: Resist

resist · Resist

0.169	126.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

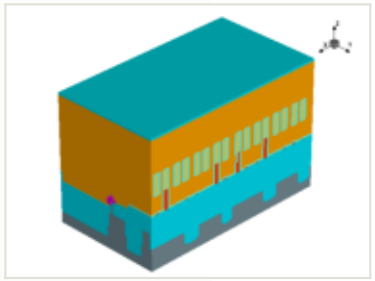

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

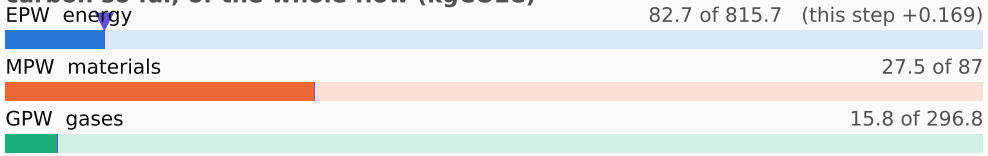

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

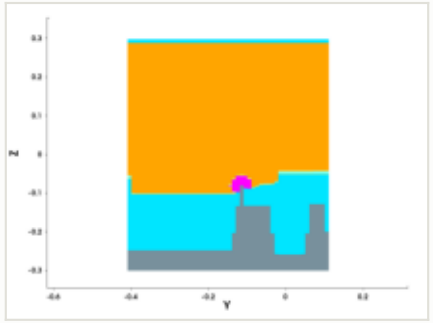

y cut at -0.150 µm

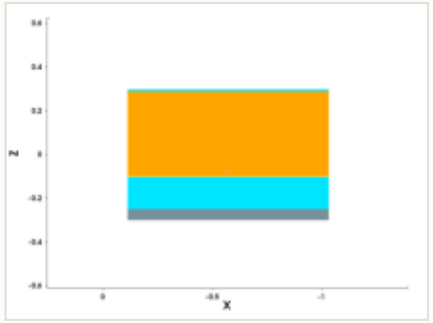

mask for this step

no mask for this step

steps by process area

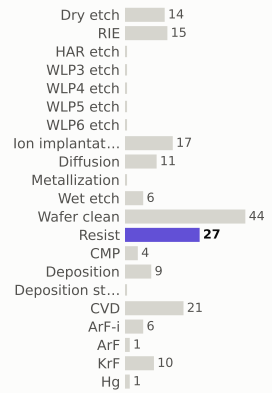

materials deposited (g)



gases emitted (g)

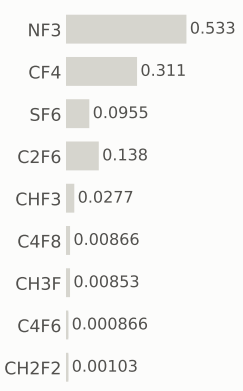

Step #2470: ArF-i

litho_patterning · ArF-i

0.217	126.2	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

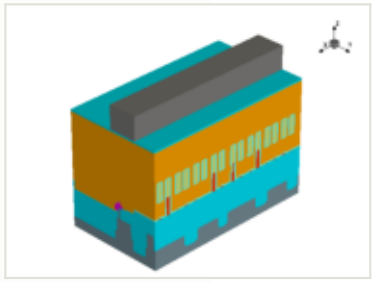

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

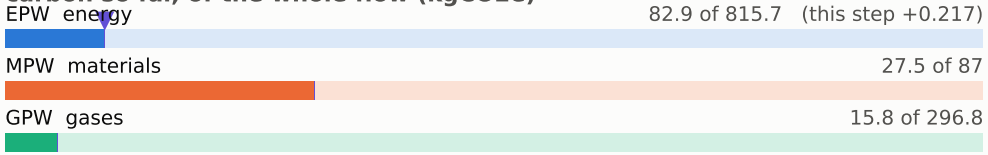

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

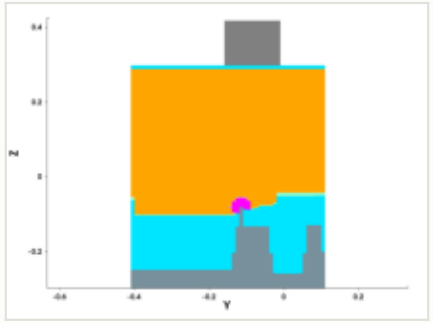

y cut at -0.150 µm

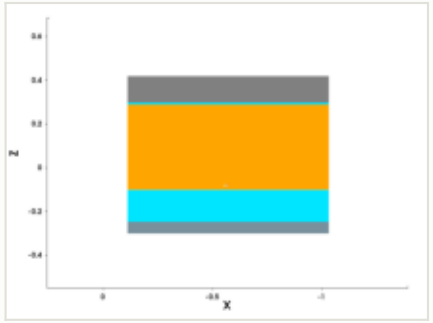

mask: layer 2012:0, positive (GDSII)

steps by process area

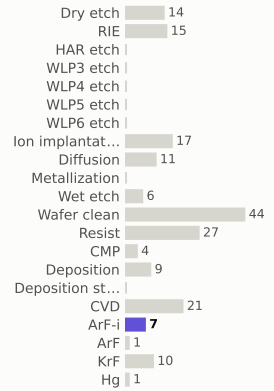

materials deposited (g)

gases emitted (g)

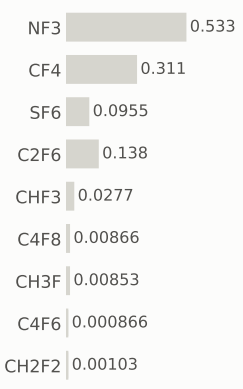

Step #2480: RIE

etch_anisotropic · RIE

1.04	127.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

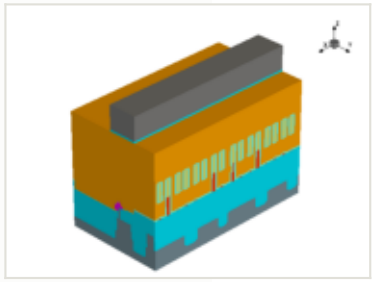

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

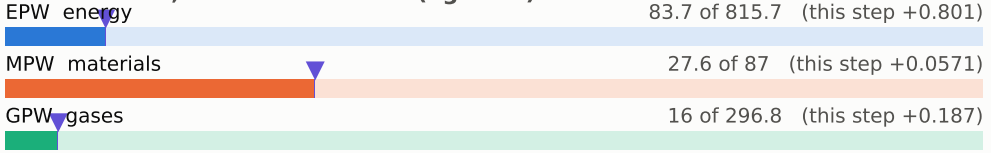

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

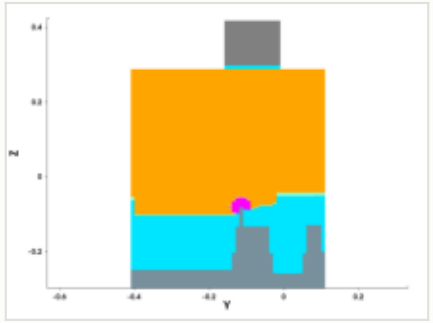

y cut at -0.150 µm

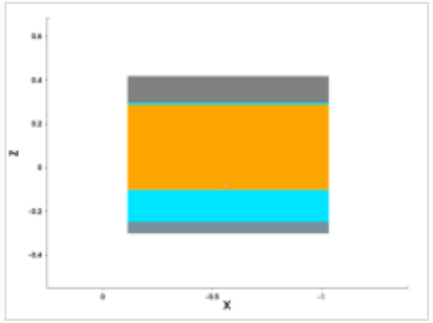

mask for this step

no mask for this step

steps by process area

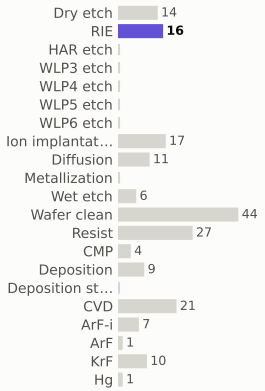

materials deposited (g)

gases emitted (g)

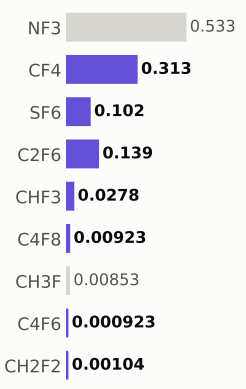

Step #2490: Spx_only

etch_anisotropic · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

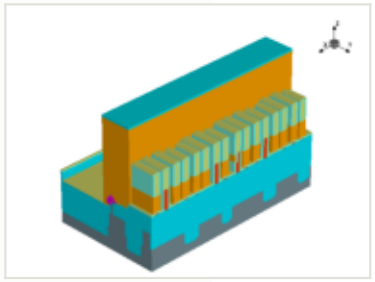

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

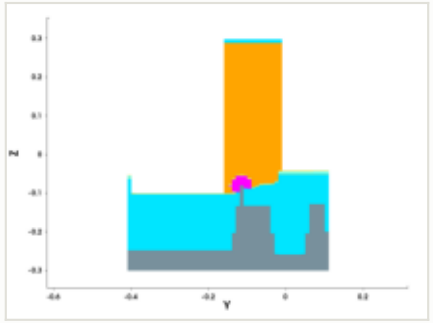

y cut at -0.150 µm

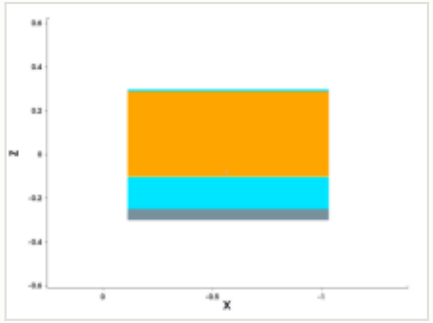

mask for this step

no mask for this step

steps by process area

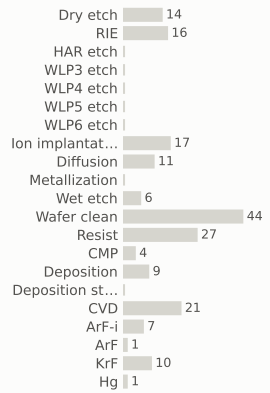

materials deposited (g)

gases emitted (g)

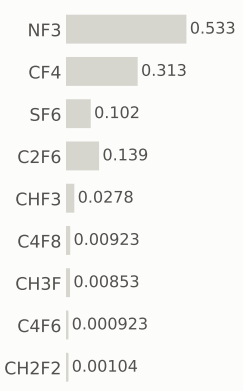

Step #2500: Spx_only

etch_isotropic · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

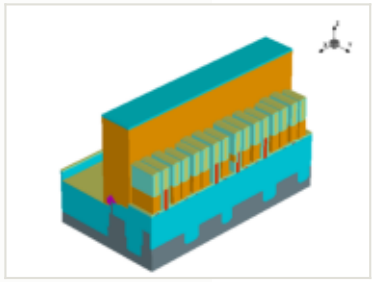

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

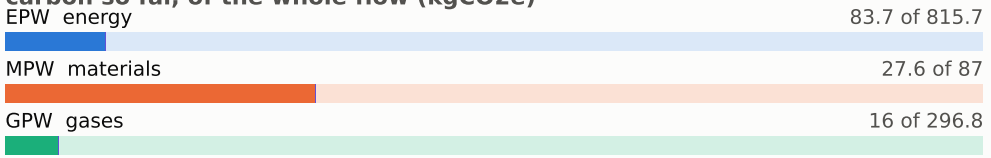

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

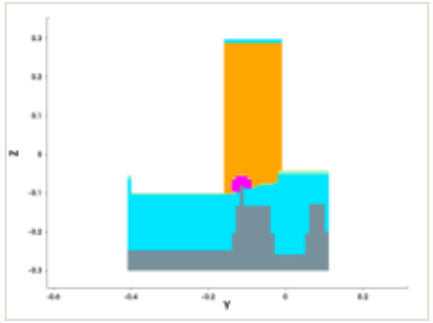

y cut at -0.150 µm

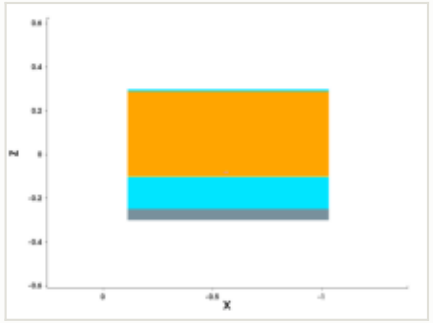

mask for this step

no mask for this step

steps by process area

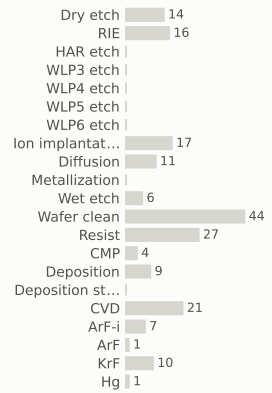

materials deposited (g)

gases emitted (g)

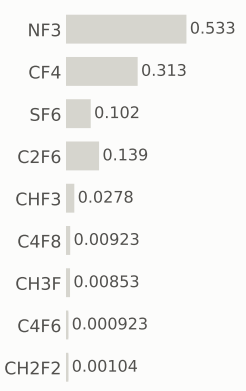

Step #2510: Spx_only

etch_anisotropic · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

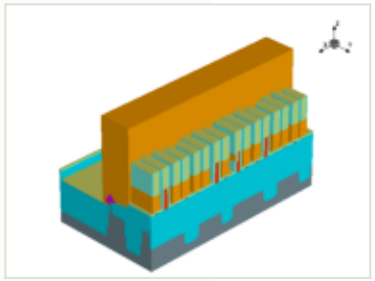

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

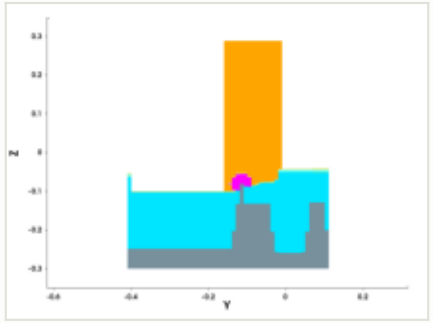

y cut at -0.150 µm

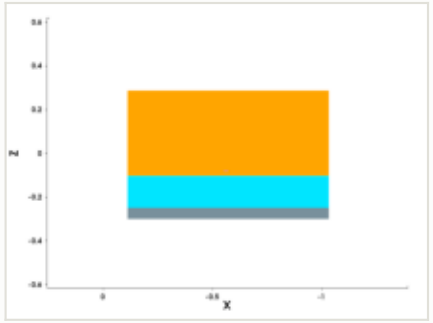

mask for this step

no mask for this step

steps by process area

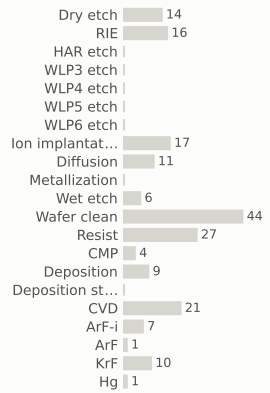

materials deposited (g)

gases emitted (g)

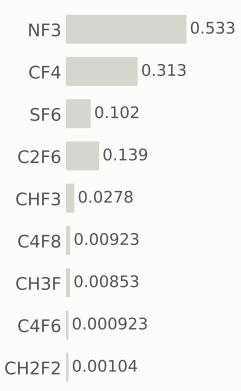

Step #2520: Spx_only

etch_anisotropic · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

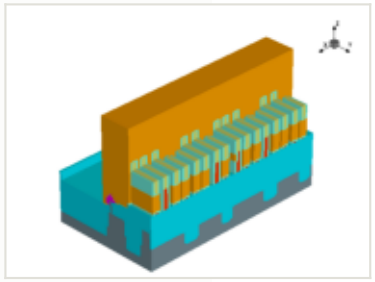

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

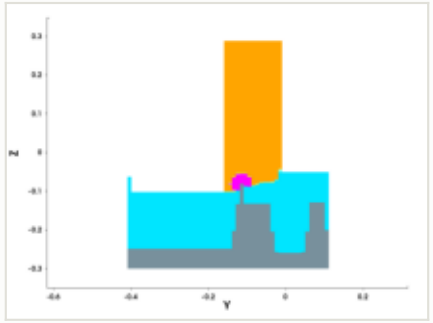

y cut at -0.150 µm

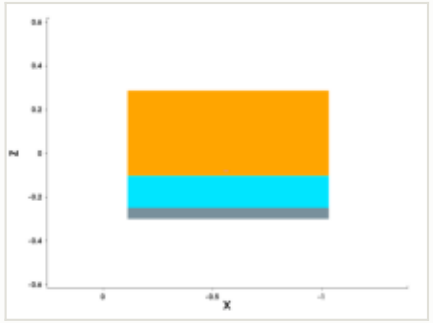

mask for this step

no mask for this step

steps by process area

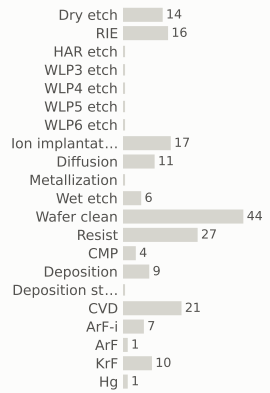

materials deposited (g)

gases emitted (g)

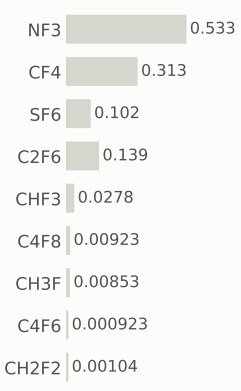

Step #2530: Spx_only

etch_anisotropic · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

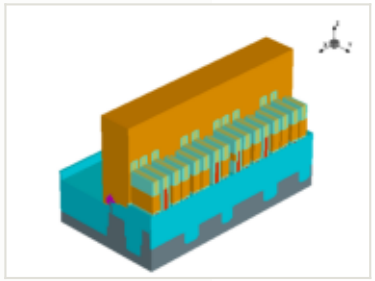

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

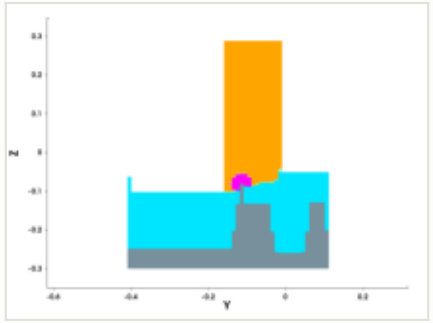

y cut at -0.150 µm

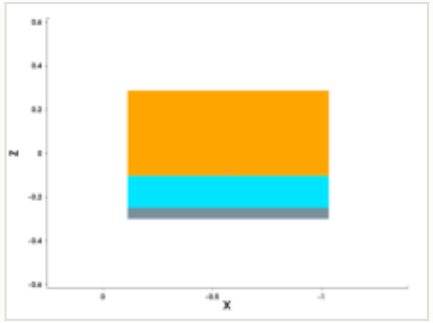

mask for this step

no mask for this step

steps by process area

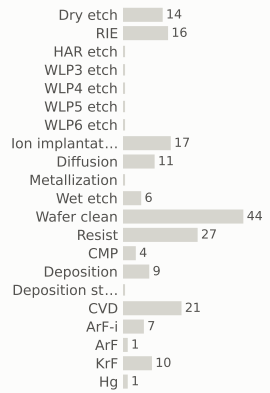

materials deposited (g)

gases emitted (g)

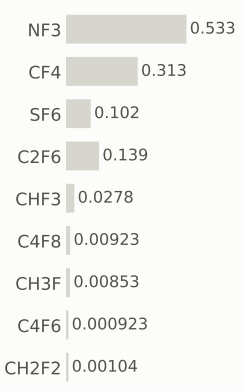

Step #2540: Spx_only

etch_anisotropic · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

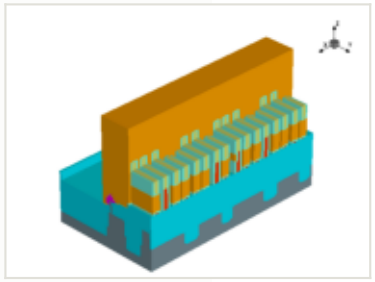

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

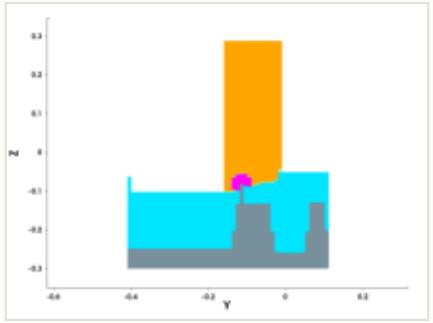

y cut at -0.150 µm

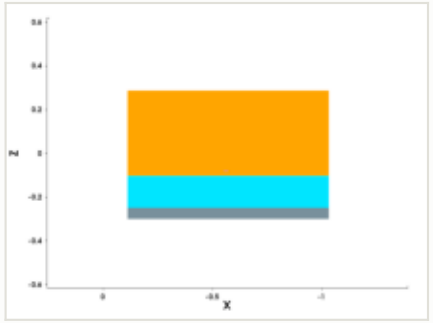

mask for this step

no mask for this step

steps by process area

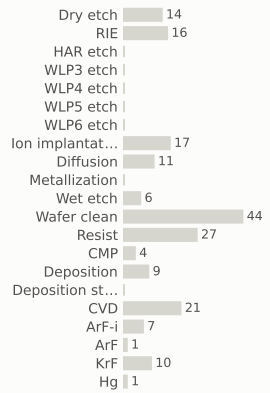

materials deposited (g)

gases emitted (g)

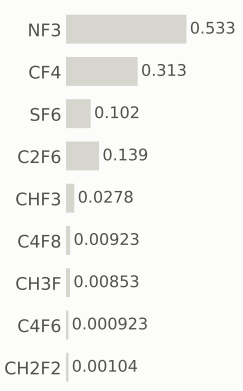

Step #2550: Spx_only

etch_microloading · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

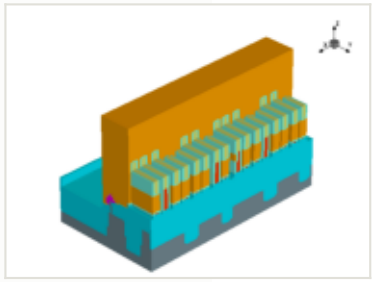

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

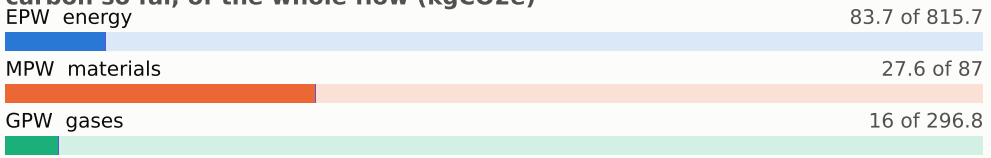

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

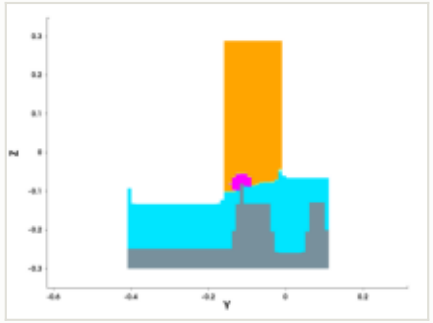

y cut at -0.150 µm

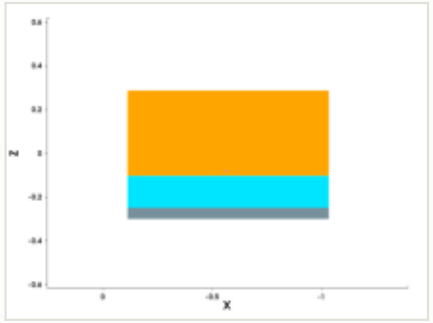

mask for this step

no mask for this step

steps by process area

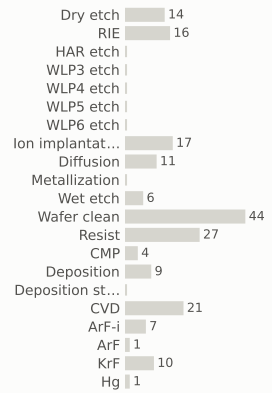

materials deposited (g)

gases emitted (g)

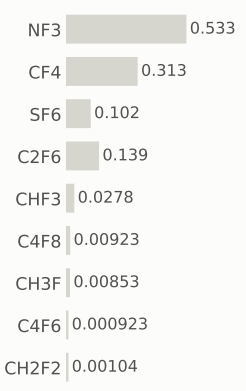

Step #2560: Spx_only

etch_anisotropic · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

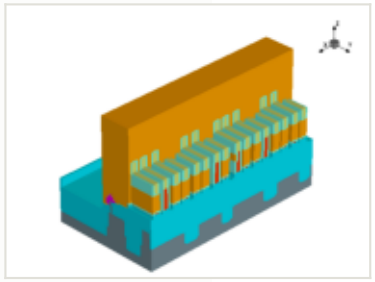

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

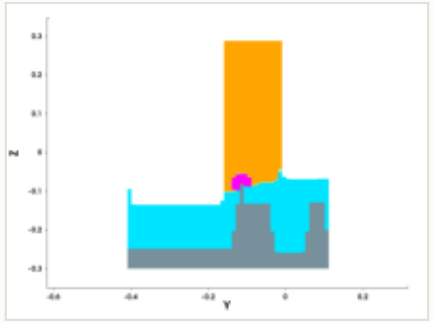

y cut at -0.150 µm

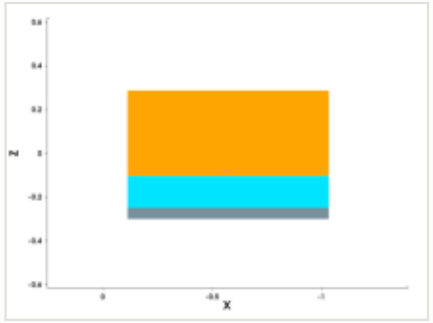

mask for this step

no mask for this step

steps by process area

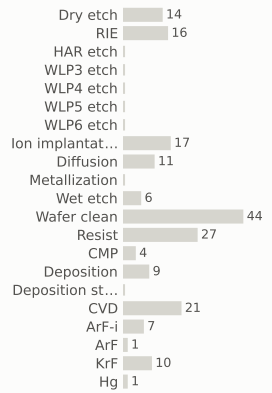

materials deposited (g)

gases emitted (g)

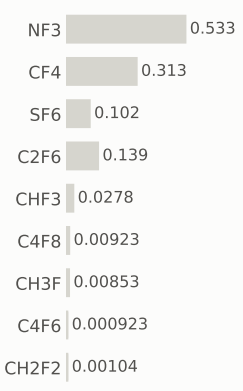

Step #2570: Spx_only

etch_isotropic · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

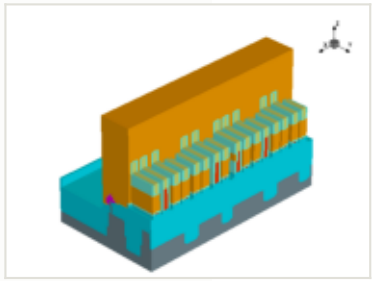

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

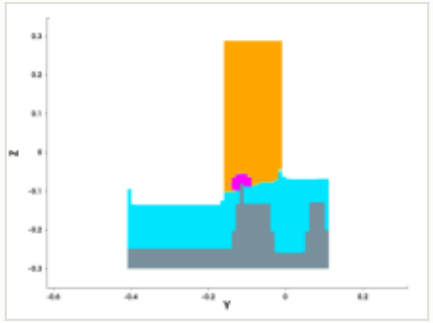

y cut at -0.150 µm

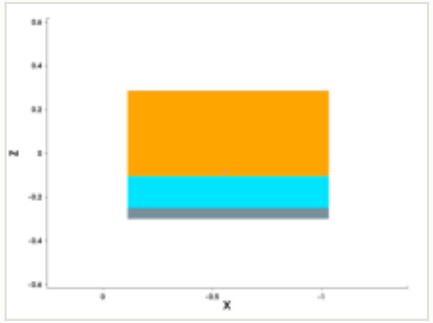

mask for this step

no mask for this step

steps by process area

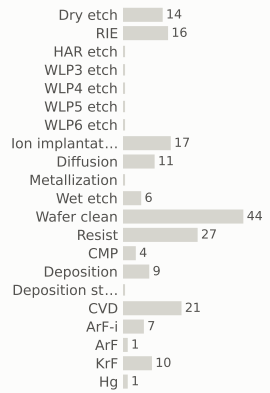

materials deposited (g)



gases emitted (g)



Step #2580: Spx_only

etch_ellipsoidal · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

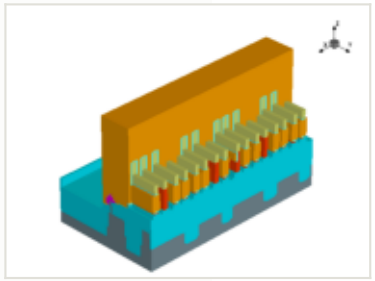

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

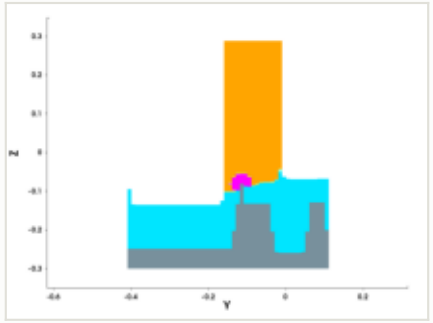

y cut at -0.150 µm

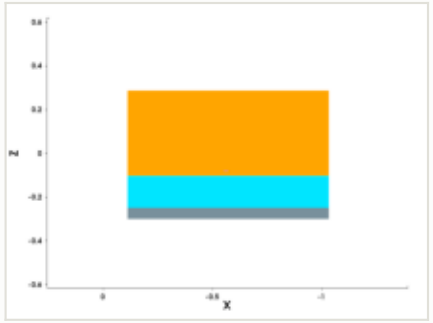

mask for this step

no mask for this step

steps by process area

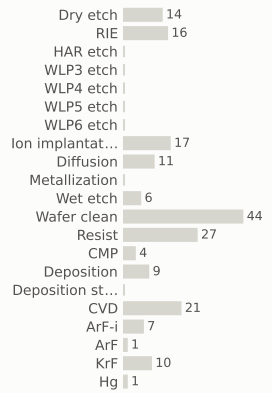

materials deposited (g)

gases emitted (g)

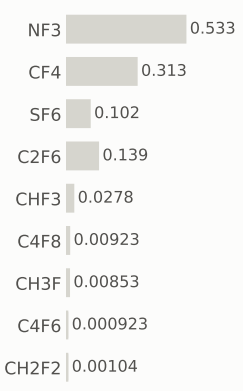

Step #2590: Spx_only

etch_strip · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

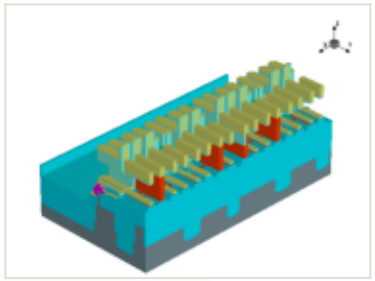

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)

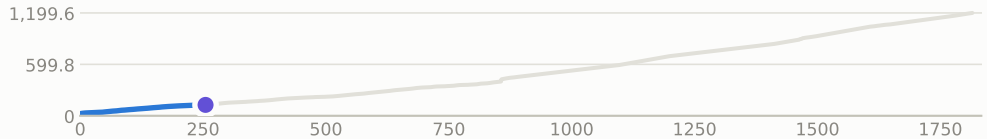

x cut at -0.570 µm

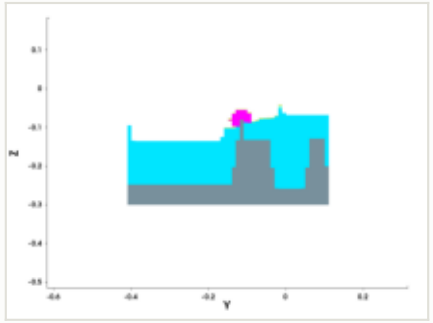

y cut at -0.150 µm

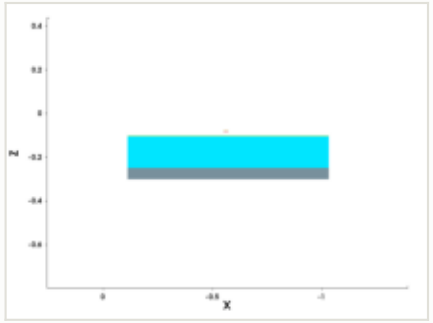

mask for this step

no mask for this step

steps by process area

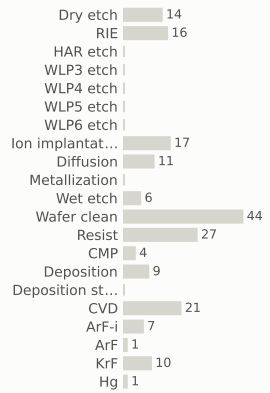

materials deposited (g)

gases emitted (g)

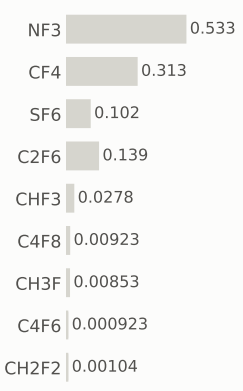

Step #2600: Spx_only

etch_ellipsoidal · Spx_only

0	127.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

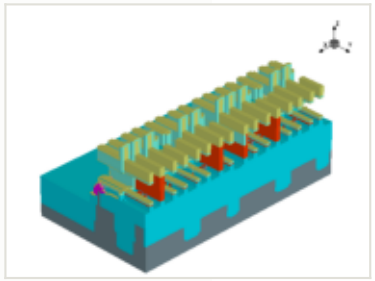

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 83.7 of 815.7

MPW materials 27.6 of 87

GPW gases 16 of 296.8

embodied carbon up to each step (kgCO2e per wafer)

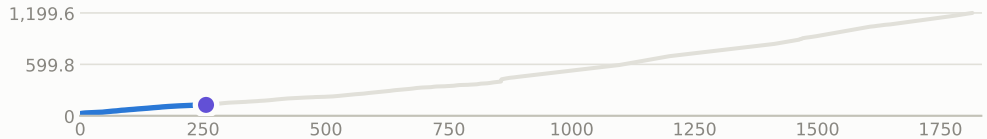

x cut at -0.570 µm

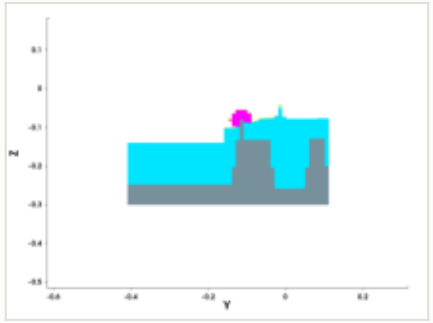

y cut at -0.150 µm

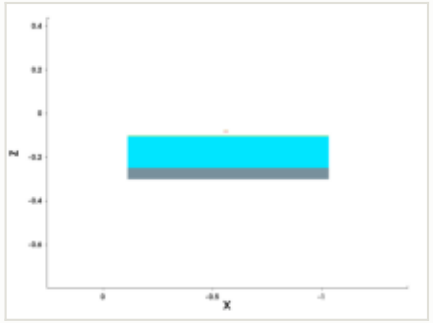

mask for this step

no mask for this step

steps by process area

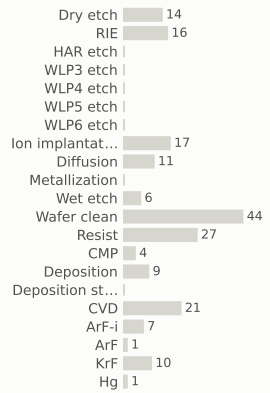

materials deposited (g)

gases emitted (g)

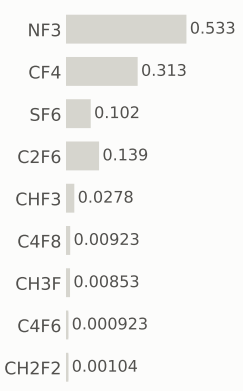

Step #2610: Wafer_clean

clean · Wafer_clean

0.169	127.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

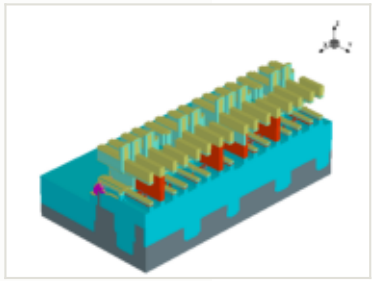

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

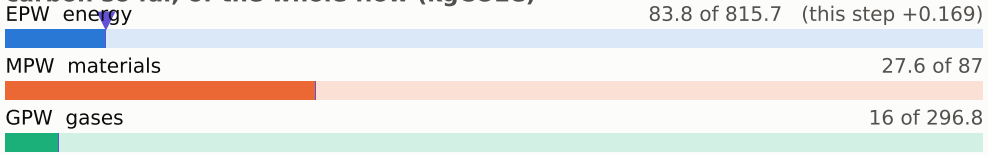

embodied carbon up to each step (kgCO2e per wafer)

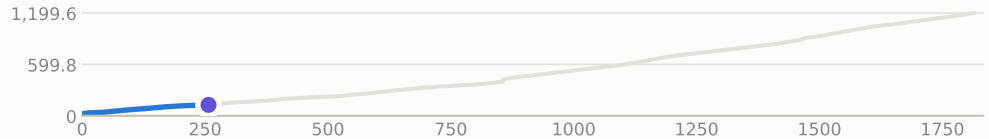

x cut at -0.570 µm

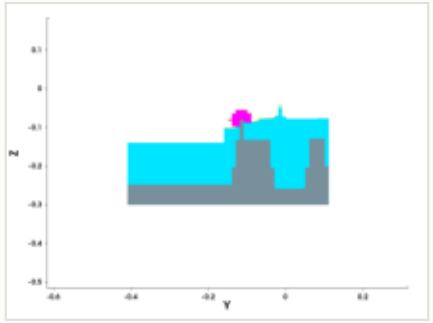

y cut at -0.150 µm

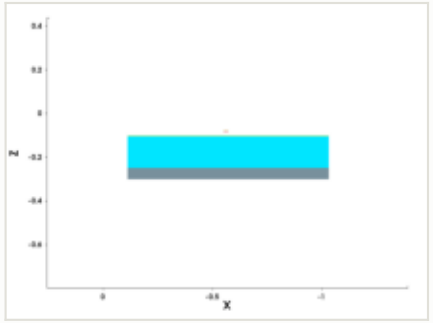

mask for this step

no mask for this step

steps by process area

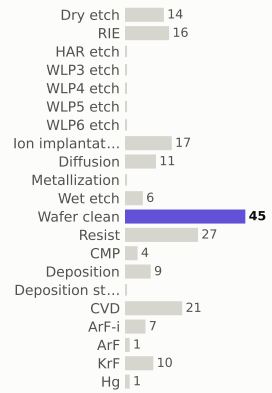

materials deposited (g)



gases emitted (g)

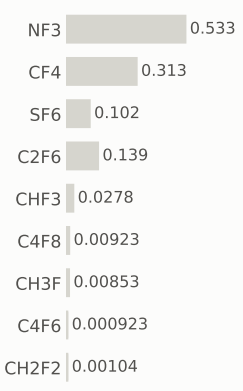

Step #2620: CVD

depo_epi · CVD

1.31	128.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

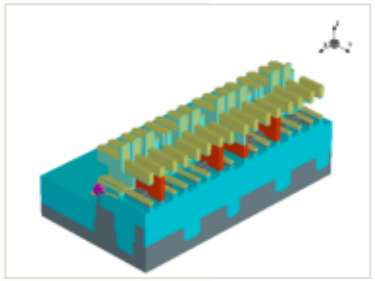

this step

process area	CVD
material	—
thickness	0.0266 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 84.5 of 815.7 (this step +0.656)

MPW materials — 27.6 of 87 (this step +0.0317)

GPW gases — 16.6 of 296.8 (this step +0.62)

embodied carbon up to each step (kgCO2e per wafer)

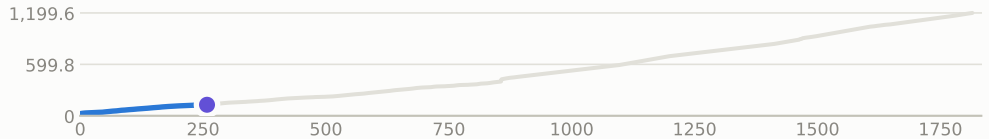

x cut at -0.570 µm

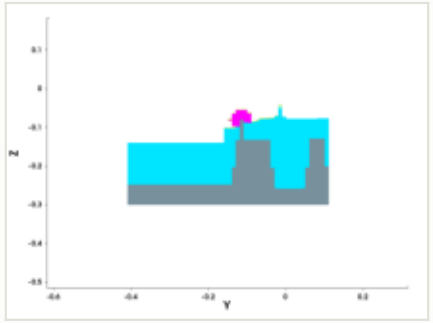

y cut at -0.150 µm

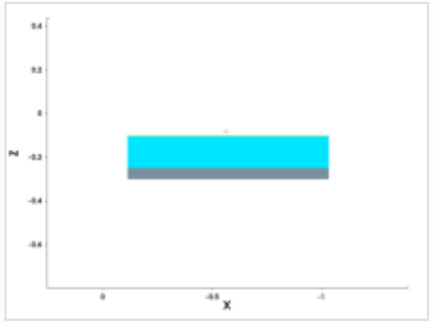

mask for this step

no mask for this step

steps by process area

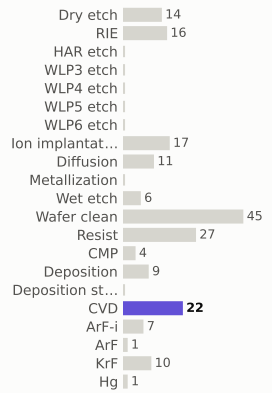

materials deposited (g)

gases emitted (g)



Step #2630: Spx_only

depo_epi · Spx_only

0	128.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

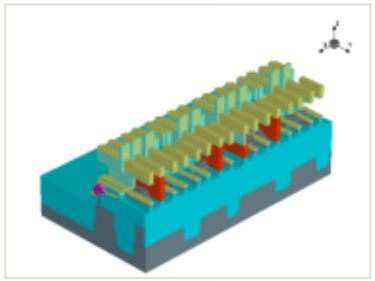

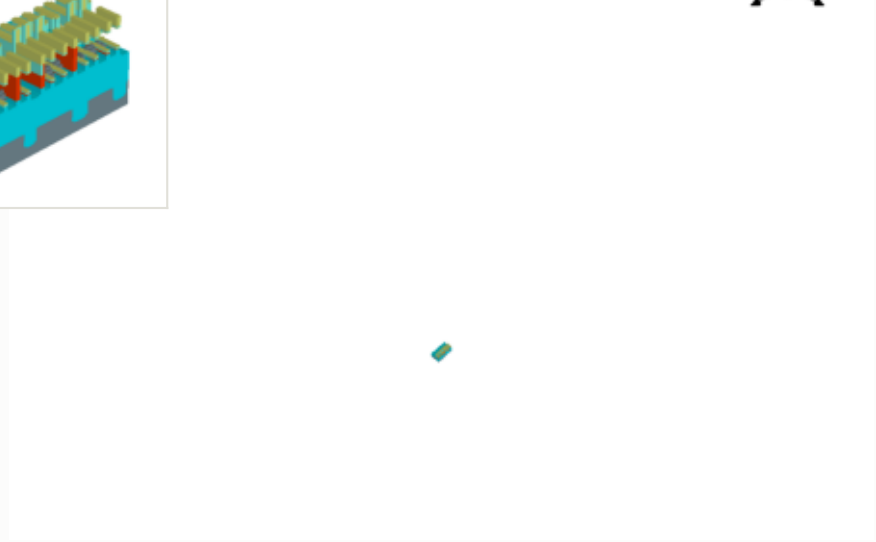

this step

process area	Spx_only
material	—
thickness	0.009 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 84.5 of 815.7

MPW materials 27.6 of 87

GPW gases 16.6 of 296.8

embodied carbon up to each step (kgCO2e per wafer)

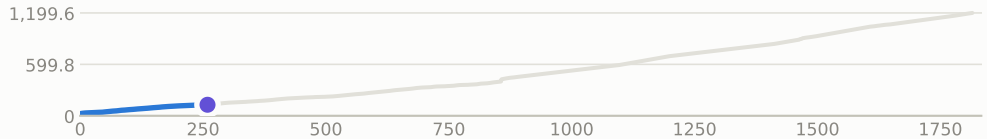

x cut at -0.570 µm

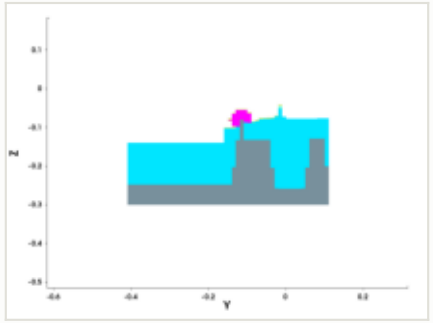

y cut at -0.150 µm

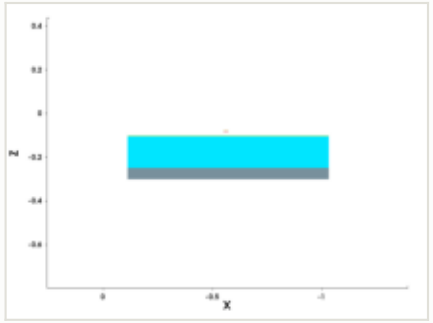

mask for this step

no mask for this step

steps by process area

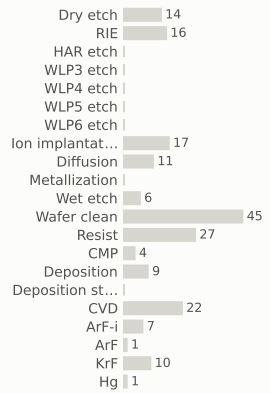

materials deposited (g)

gases emitted (g)

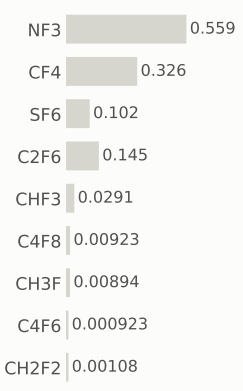

Step #2640: Wafer_clean

clean · Wafer_clean

0.169	128.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

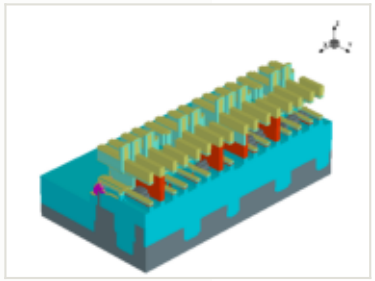

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

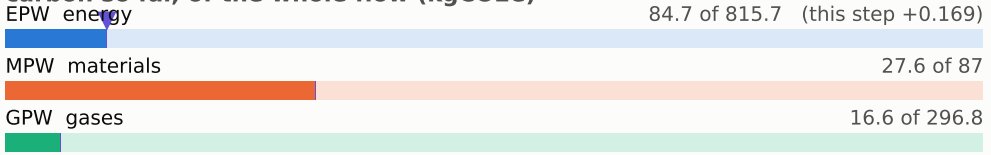

embodied carbon up to each step (kgCO2e per wafer)

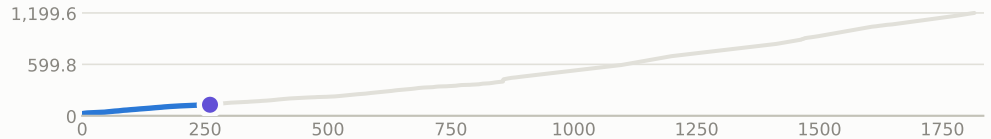

x cut at -0.570 µm

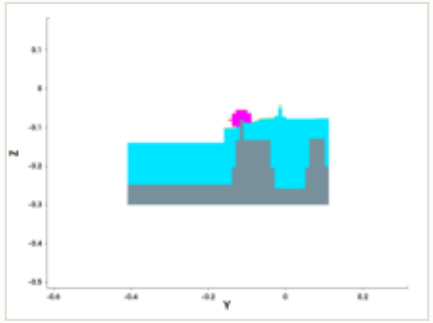

y cut at -0.150 µm

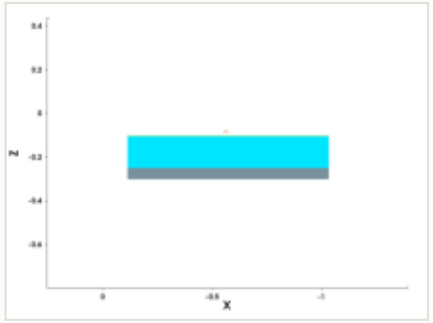

mask for this step

no mask for this step

steps by process area

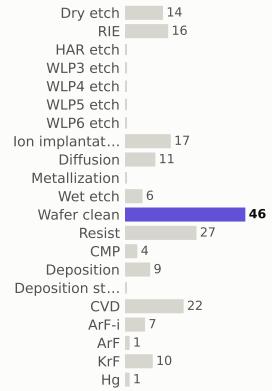

materials deposited (g)

gases emitted (g)

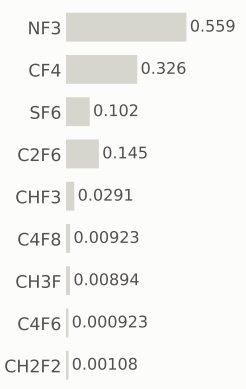

Step #2650: Deposition

depo_isotropic · Deposition

0.656	129.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

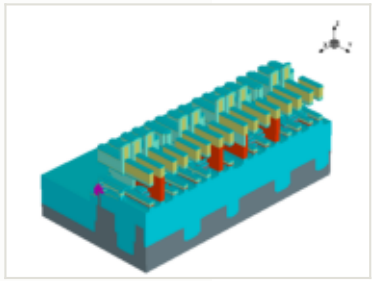

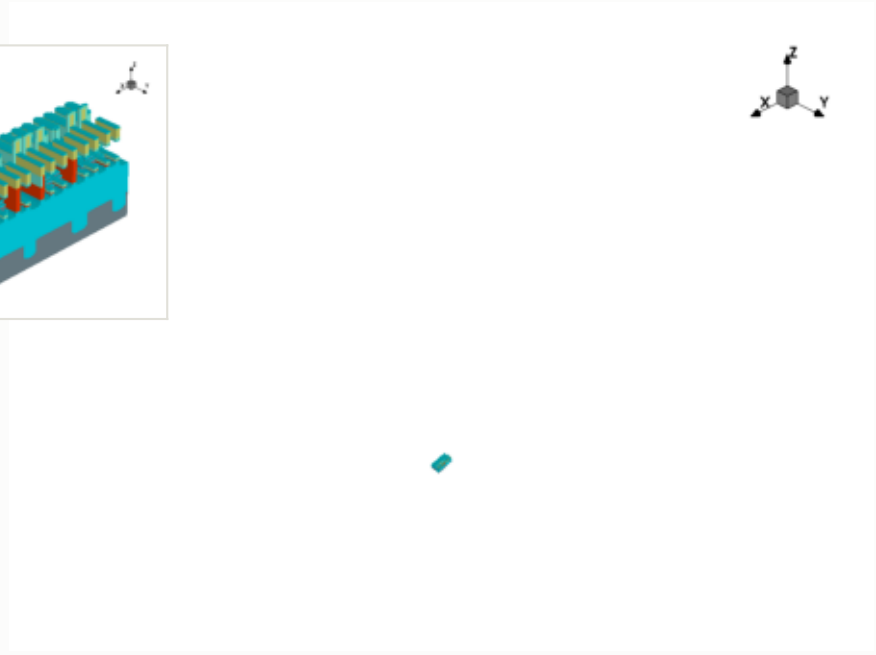

this step

process area	Deposition
material	—
thickness	0.005 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

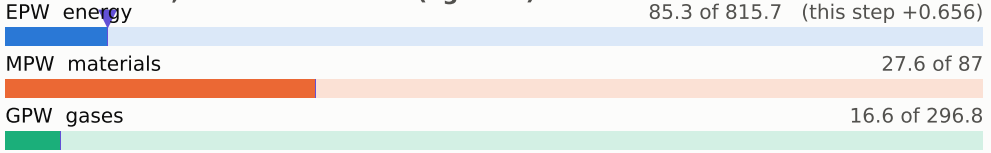

embodied carbon up to each step (kgCO2e per wafer)

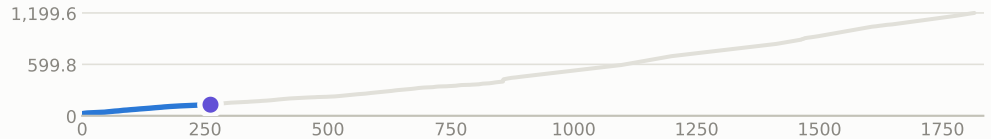

x cut at -0.570 µm

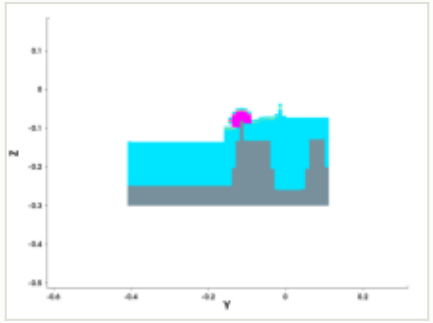

y cut at -0.150 µm

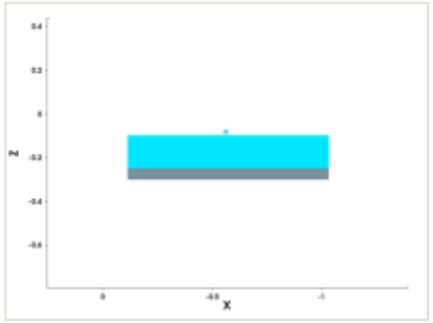

mask for this step

no mask for this step

steps by process area

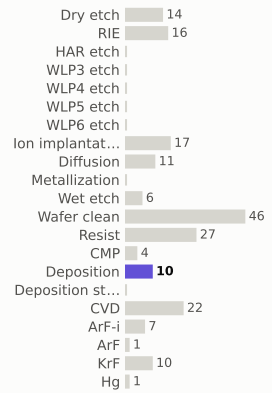

materials deposited (g)

gases emitted (g)

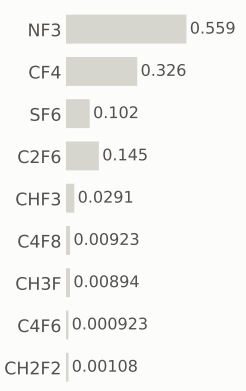

Step #2660: RIE

etch_anisotropic · RIE

1.04	130.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

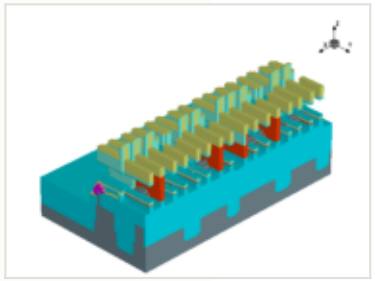

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 86.1 of 815.7 (this step +0.801)

MPW materials — 27.7 of 87 (this step +0.0571)

GPW gases — 16.8 of 296.8 (this step +0.187)

x cut at -0.570 µm

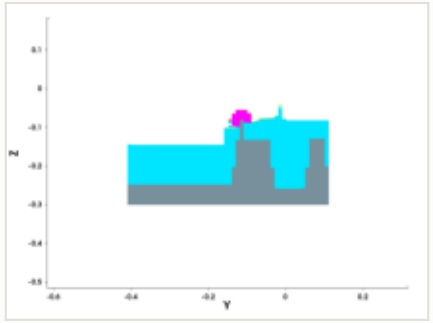

y cut at -0.150 µm

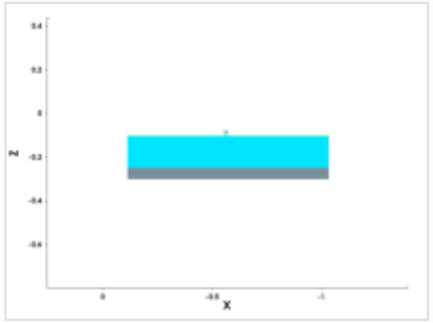

mask for this step

no mask for this step

embodied carbon up to each step (kgCO2e per wafer)

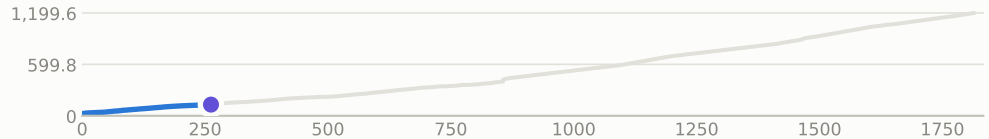

steps by process area

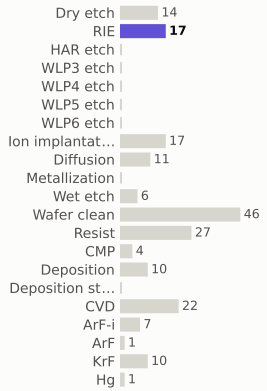

materials deposited (g)

gases emitted (g)

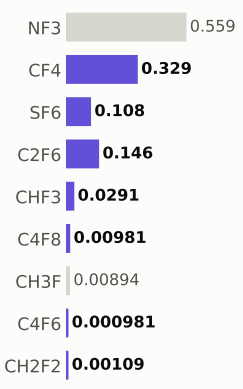

Step #2670: Wafer_clean

clean · Wafer_clean

0.169	130.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

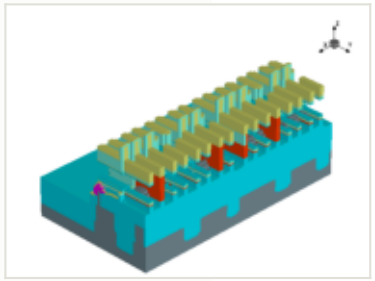

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

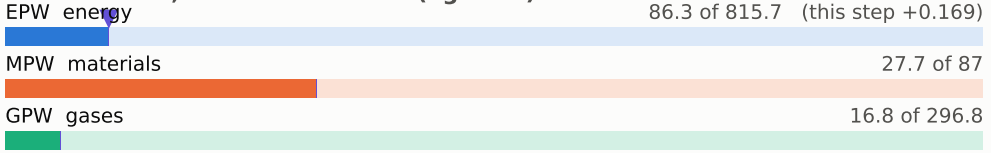

embodied carbon up to each step (kgCO2e per wafer)

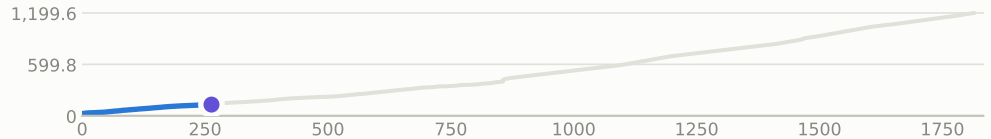

x cut at -0.570 µm

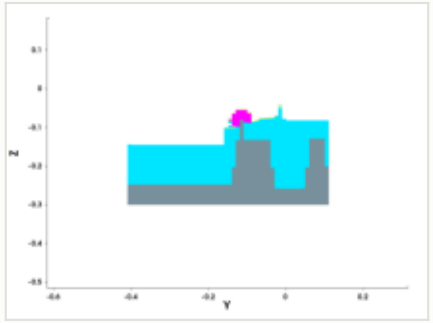

y cut at -0.150 µm

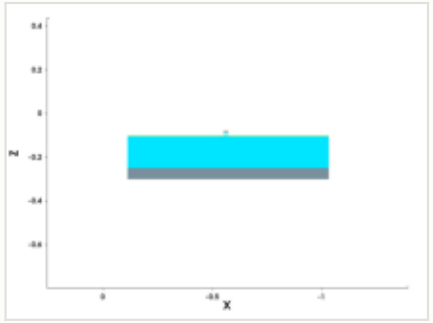

mask for this step

no mask for this step

steps by process area

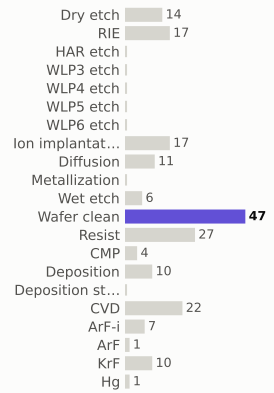

materials deposited (g)

gases emitted (g)

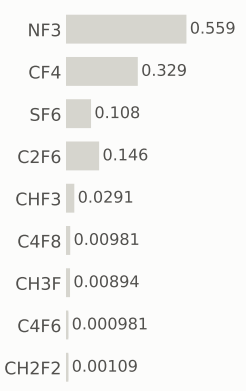

Step #2680: Resist

resist · Resist

0.169	131.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

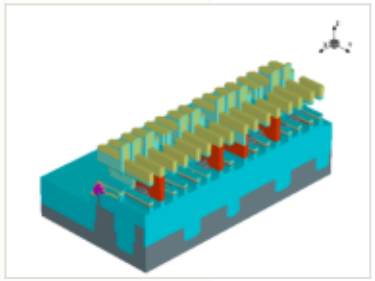

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

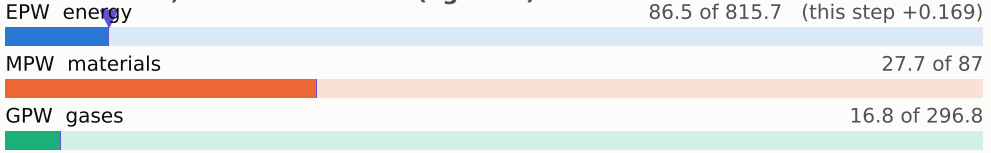

embodied carbon up to each step (kgCO2e per wafer)

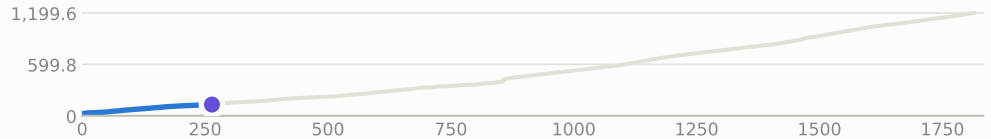

x cut at -0.570 µm

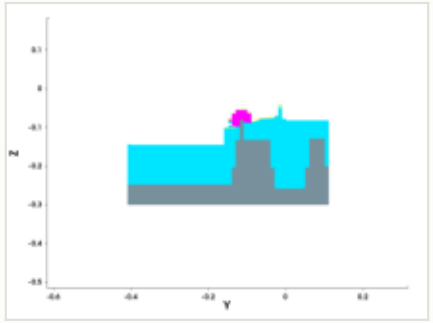

y cut at -0.150 µm

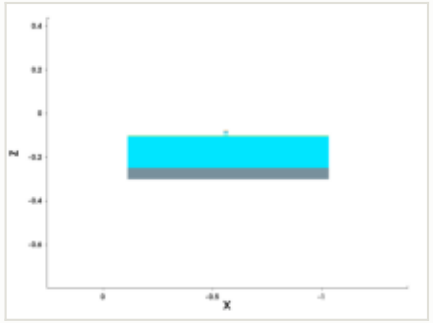

mask for this step

no mask for this step

steps by process area

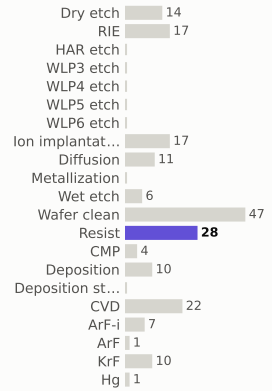

materials deposited (g)

gases emitted (g)

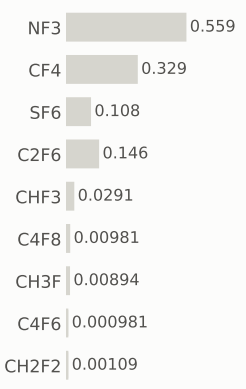

Step #2690: KrF

litho_patterning · KrF

0.199	131.2	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

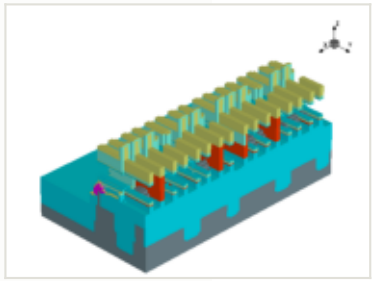

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

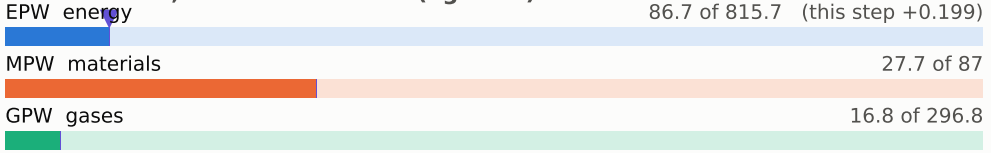

embodied carbon up to each step (kgCO2e per wafer)

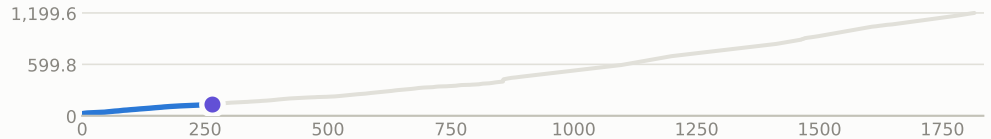

x cut at -0.570 µm

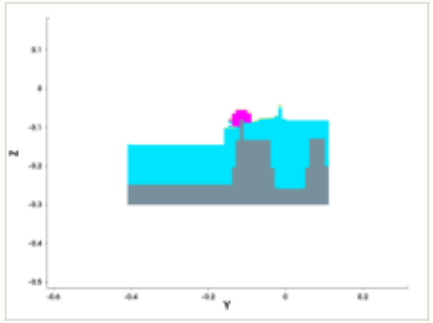

y cut at -0.150 µm

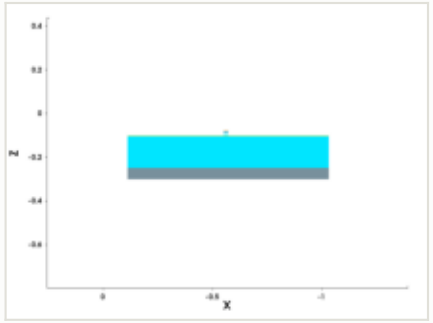

mask: layer 2100:0, positive (GDSII)

steps by process area

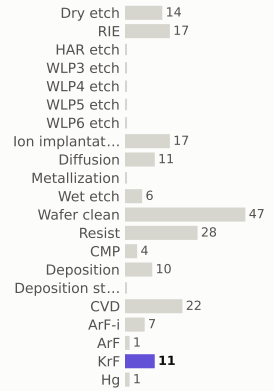

materials deposited (g)

gases emitted (g)

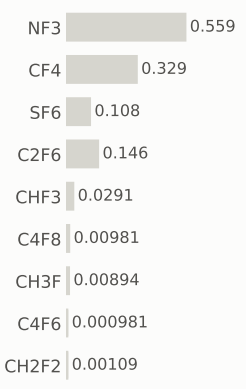

Step #2700: RIE

etch_isotropic · RIE

1.04	132.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

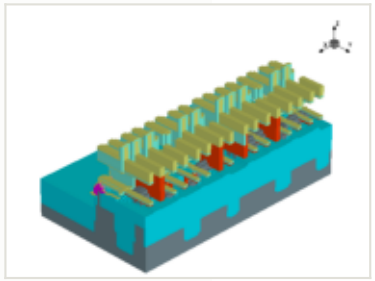

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

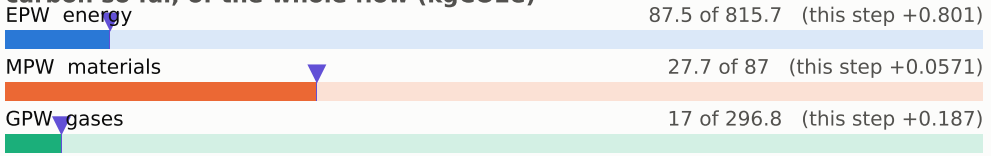

embodied carbon up to each step (kgCO2e per wafer)

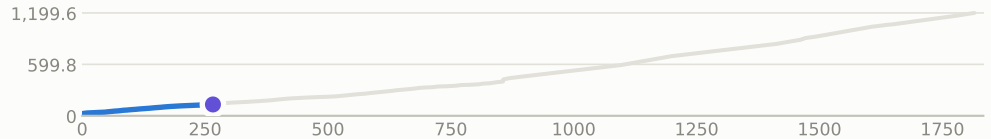

x cut at -0.570 µm

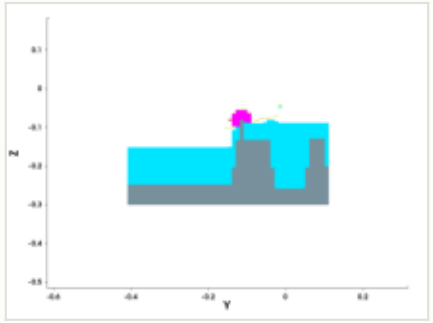

y cut at -0.150 µm

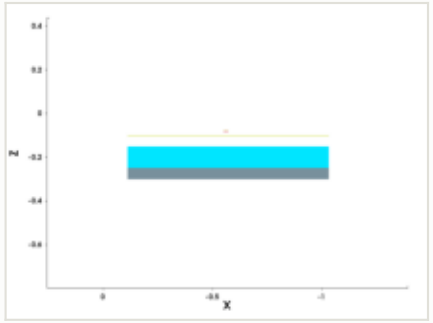

mask for this step

no mask for this step

steps by process area

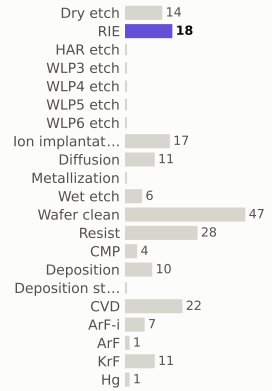

materials deposited (g)

gases emitted (g)

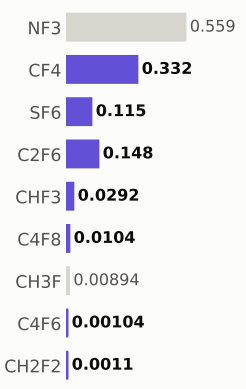

Step #2710: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	133.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

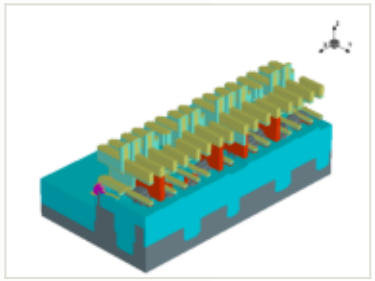

this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

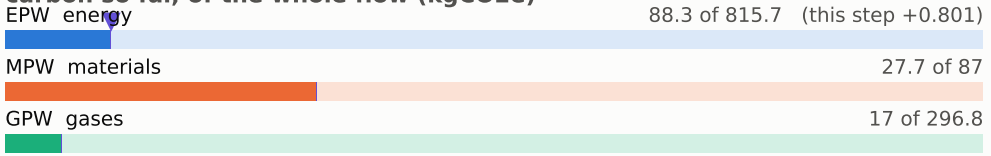

embodied carbon up to each step (kgCO2e per wafer)

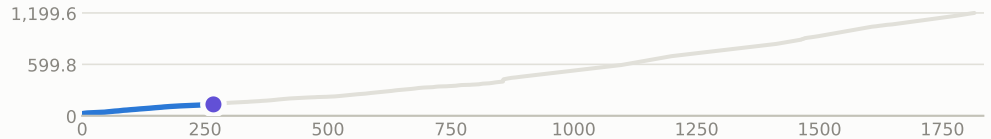

x cut at -0.570 µm

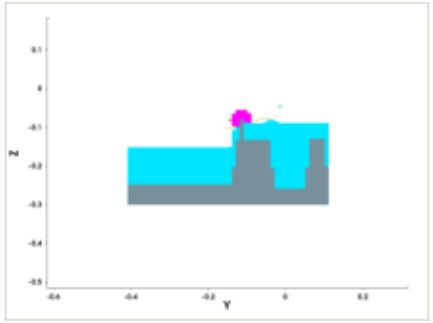

y cut at -0.150 µm

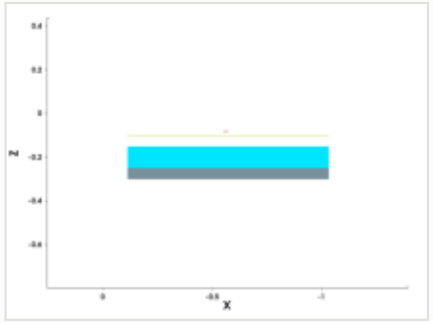

mask for this step

no mask for this step

steps by process area

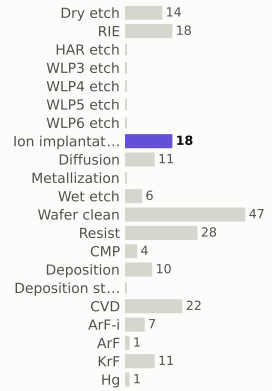

materials deposited (g)

gases emitted (g)

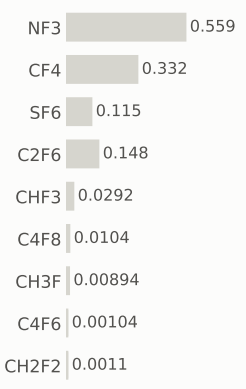

Step #2720: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	133.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

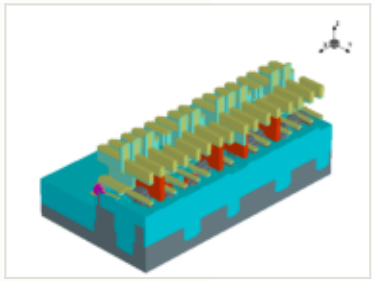

this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

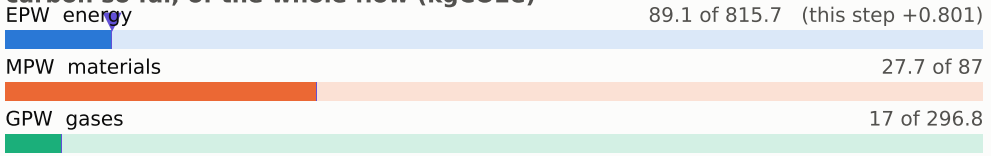

embodied carbon up to each step (kgCO2e per wafer)

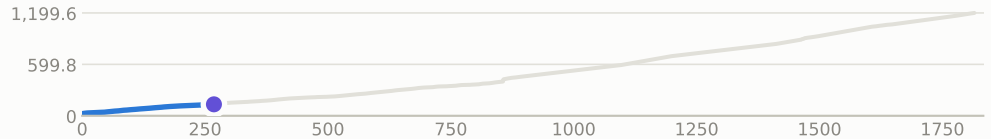

x cut at -0.570 µm

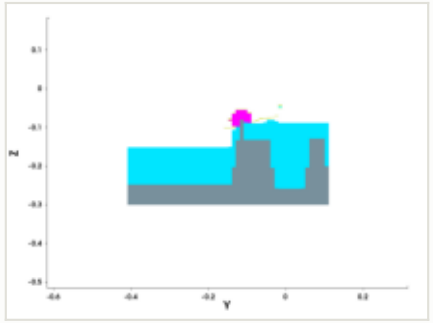

y cut at -0.150 µm

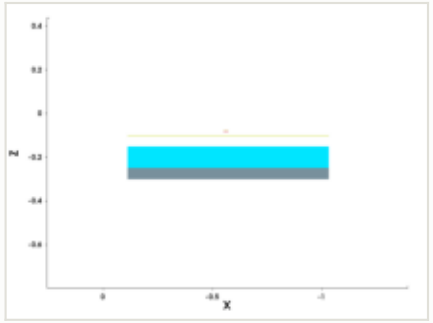

mask for this step

no mask for this step

steps by process area

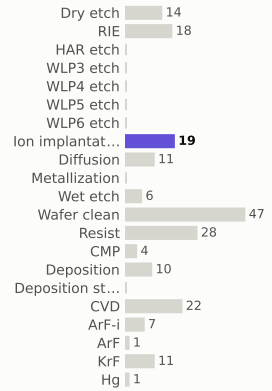

materials deposited (g)

gases emitted (g)

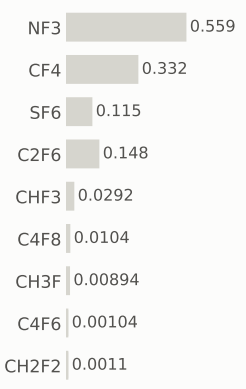

Step #2730: Dry_etch

etch_strip · Dry_etch

0.801	134.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

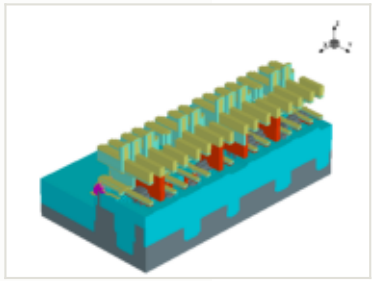

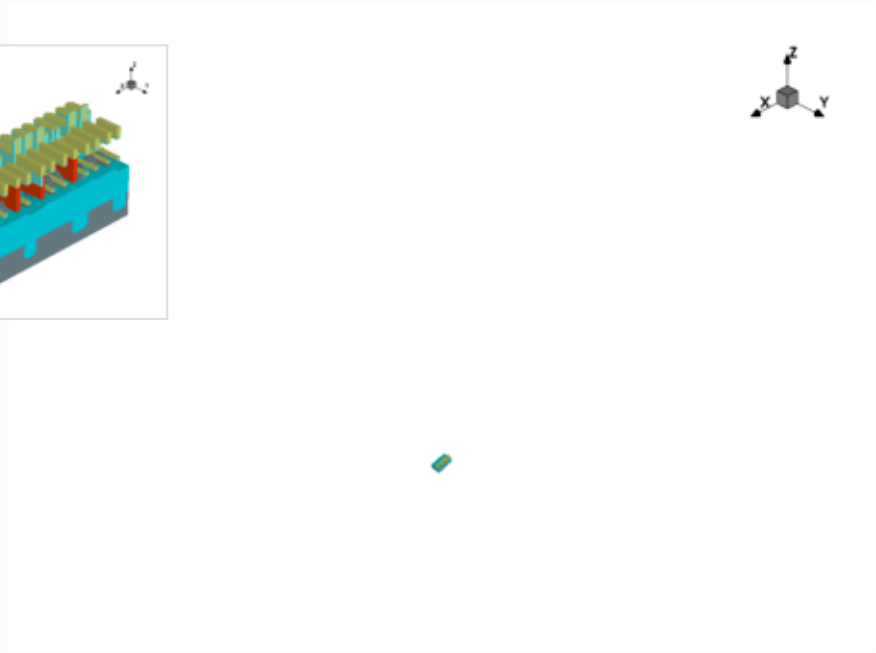

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

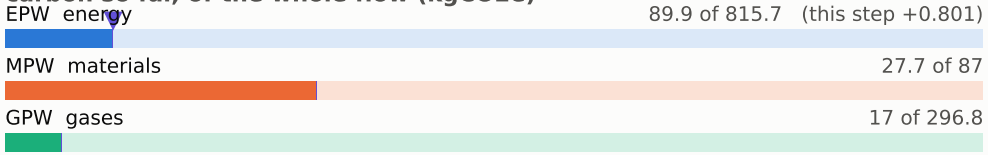

embodied carbon up to each step (kgCO2e per wafer)

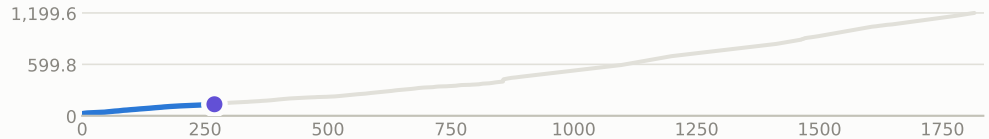

x cut at -0.570 µm

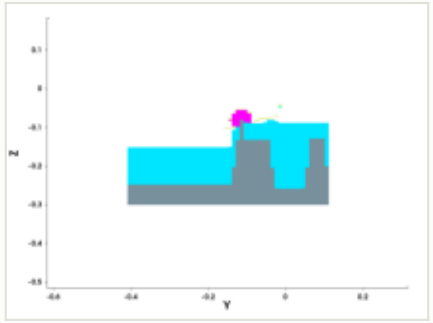

y cut at -0.150 µm

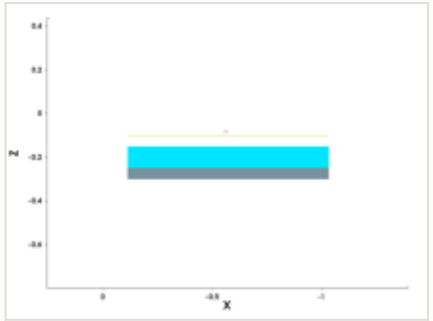

mask for this step

no mask for this step

steps by process area

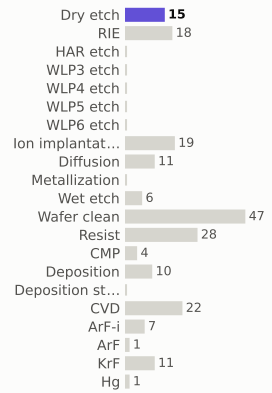

materials deposited (g)

gases emitted (g)

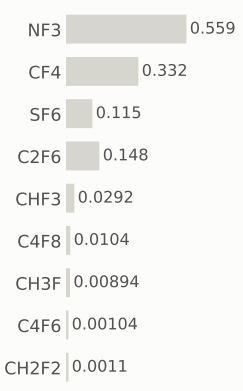

Step #2740: Wafer_clean

clean · Wafer_clean

0.169	134.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

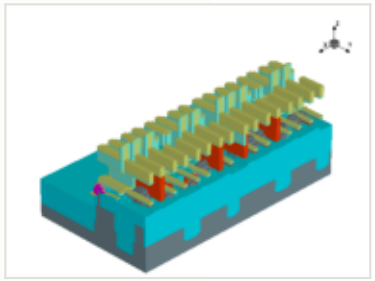

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

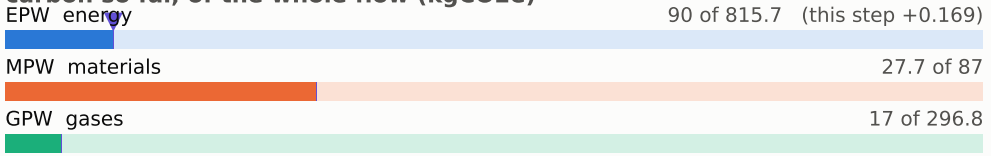

embodied carbon up to each step (kgCO2e per wafer)

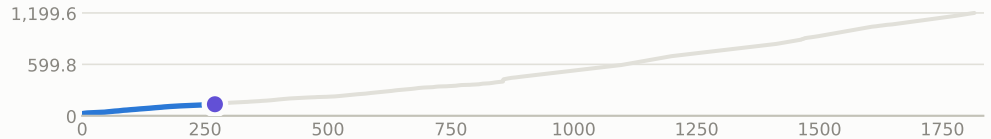

x cut at -0.570 µm

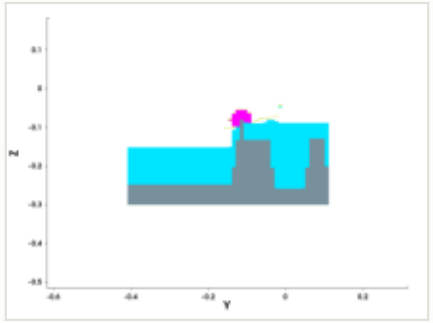

y cut at -0.150 µm

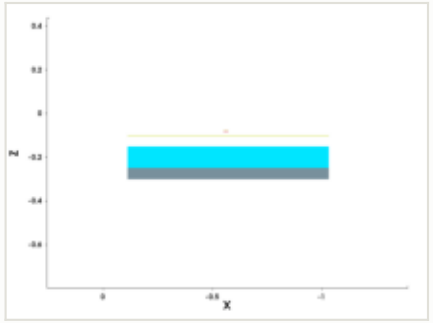

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

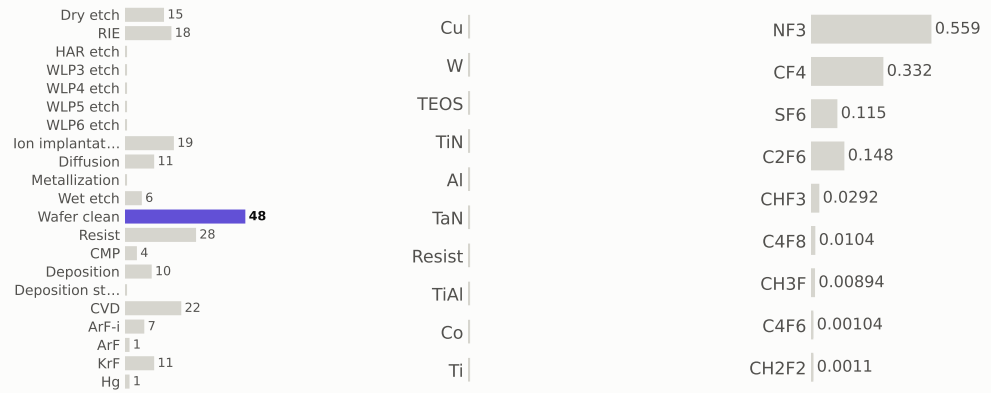

Step #2750: Resist

resist · Resist

0.169	134.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

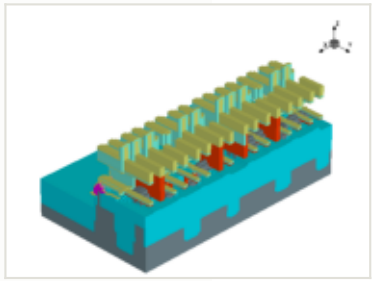

x cut at -0.570 µm

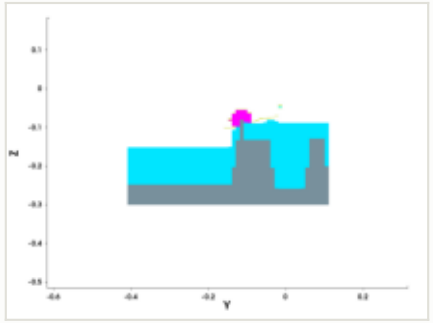

y cut at -0.150 µm

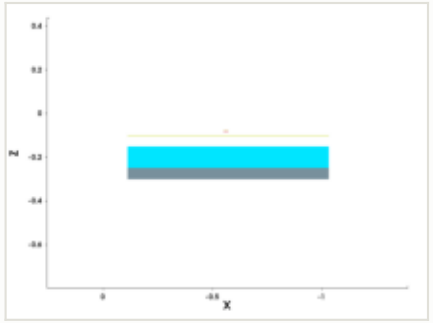

mask for this step

no mask for this step

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

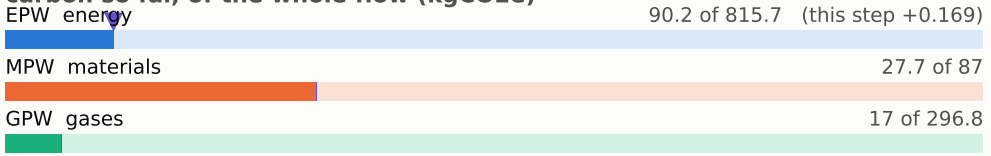

embodied carbon up to each step (kgCO2e per wafer)

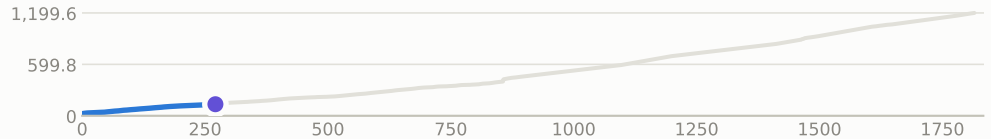

steps by process area

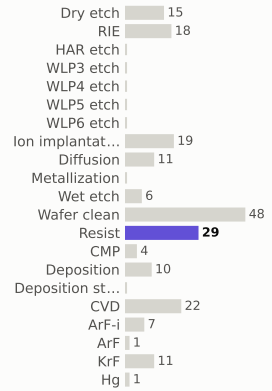

materials deposited (g)

gases emitted (g)

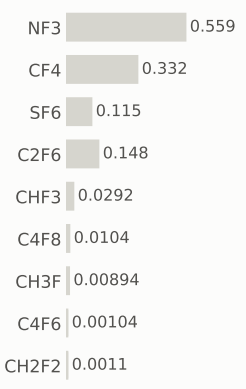

Step #2760: KrF

litho_patterning · KrF

0.199	135.1	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

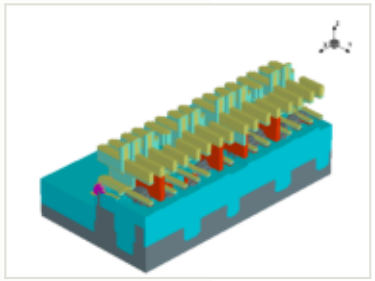

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

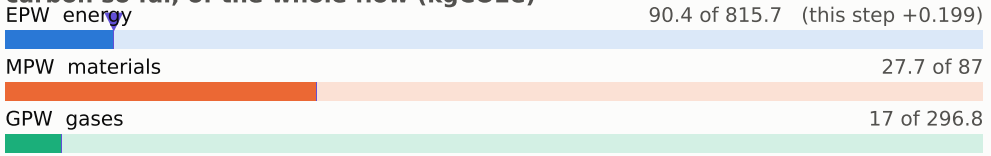

embodied carbon up to each step (kgCO2e per wafer)

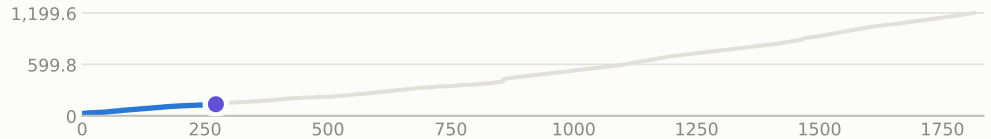

x cut at -0.570 µm

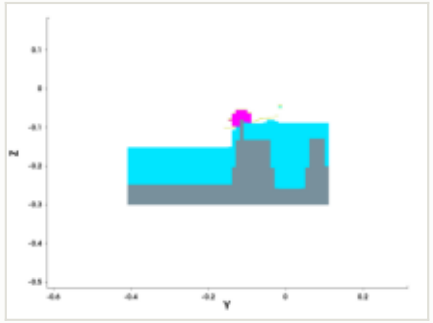

y cut at -0.150 µm

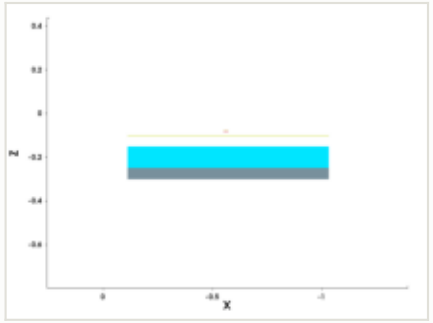

mask: layer 2100:0, positive (GDSII)

steps by process area

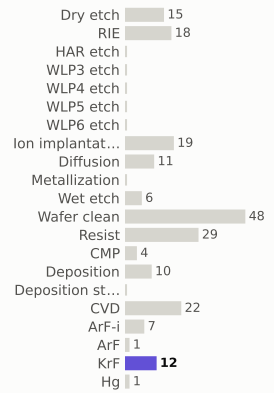

materials deposited (g)

gases emitted (g)

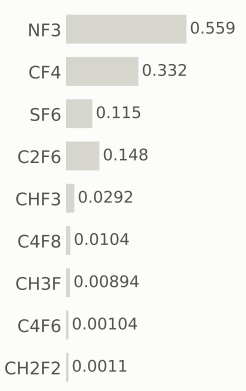

Step #2770: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	135.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

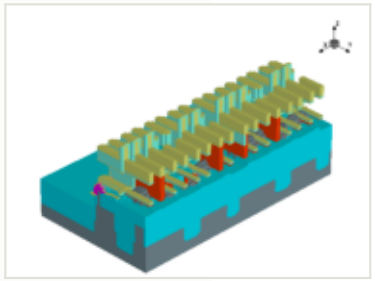

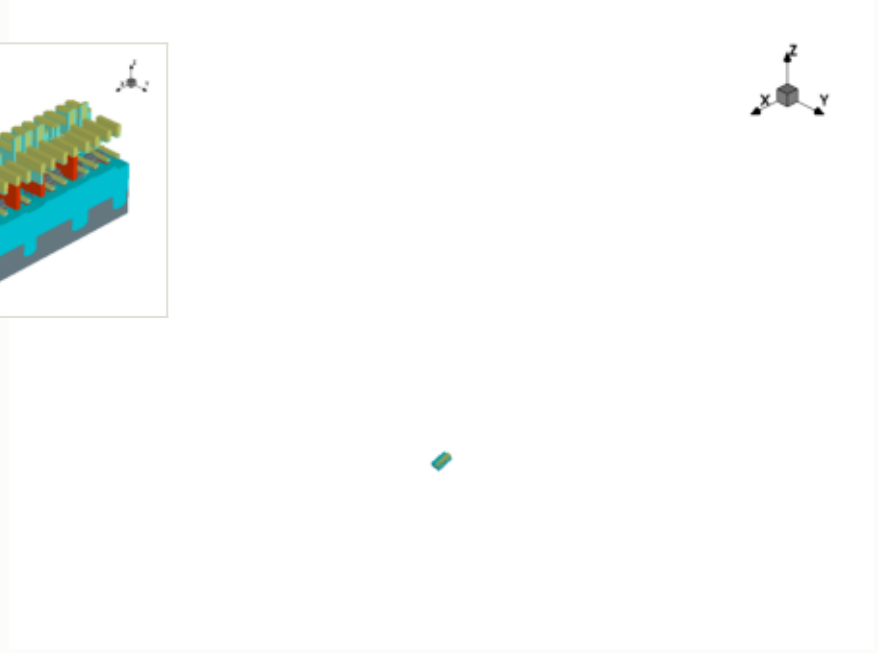

x cut at -0.570 µm

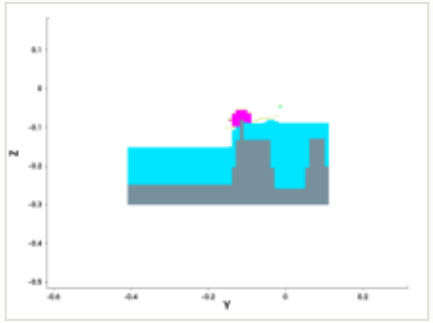

y cut at -0.150 µm

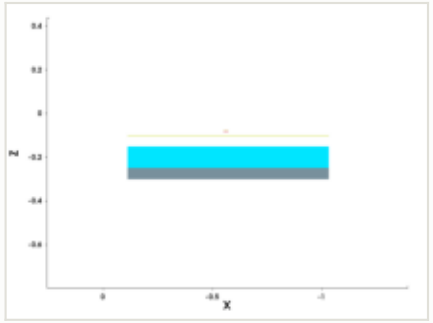

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

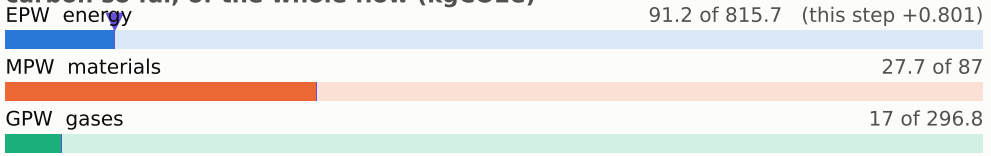

embodied carbon up to each step (kgCO2e per wafer)

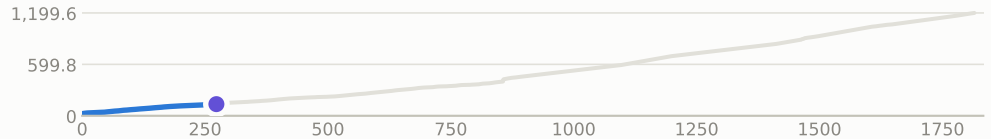

steps by process area

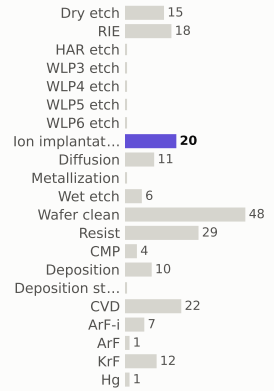

materials deposited (g)

gases emitted (g)

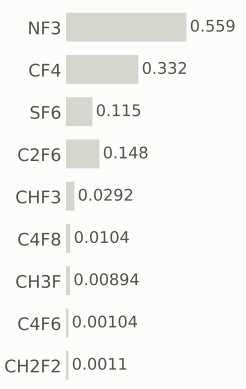

Step #2780: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	136.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

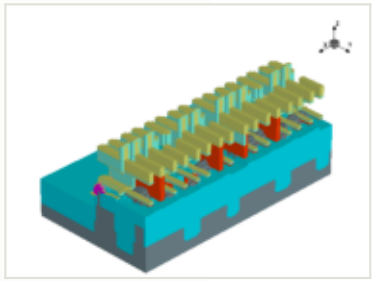

x cut at -0.570 µm

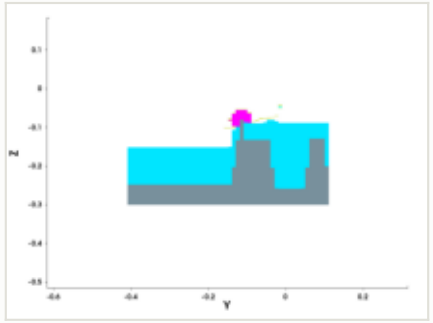

y cut at -0.150 µm

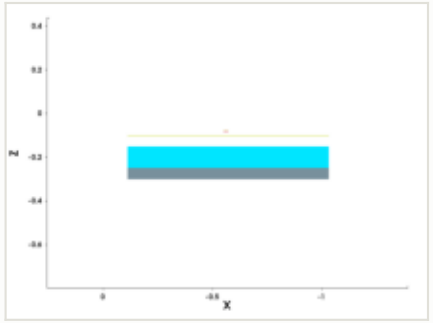

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

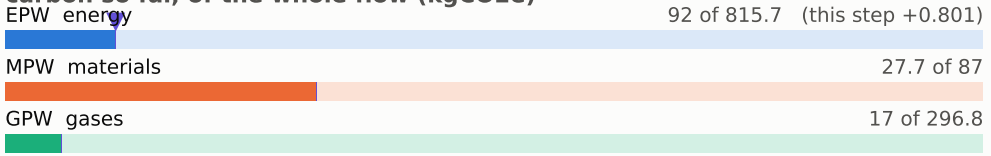

embodied carbon up to each step (kgCO2e per wafer)

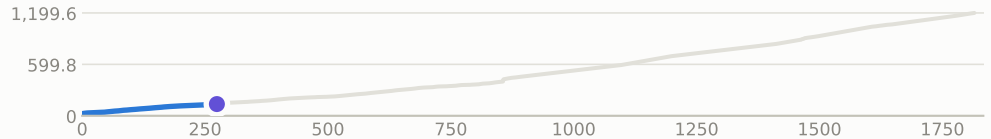

steps by process area

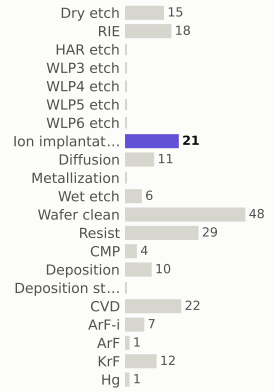

materials deposited (g)

gases emitted (g)

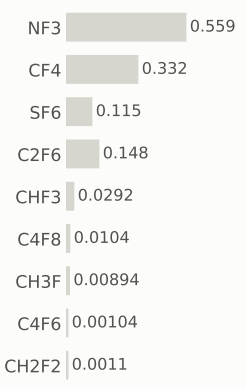

Step #2790: Dry_etch

etch_strip · Dry_etch

0.801	137.5	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

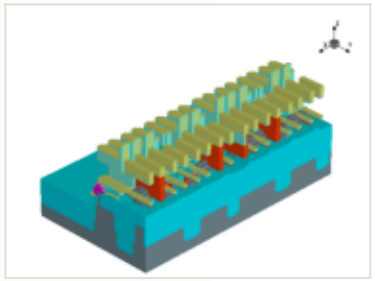

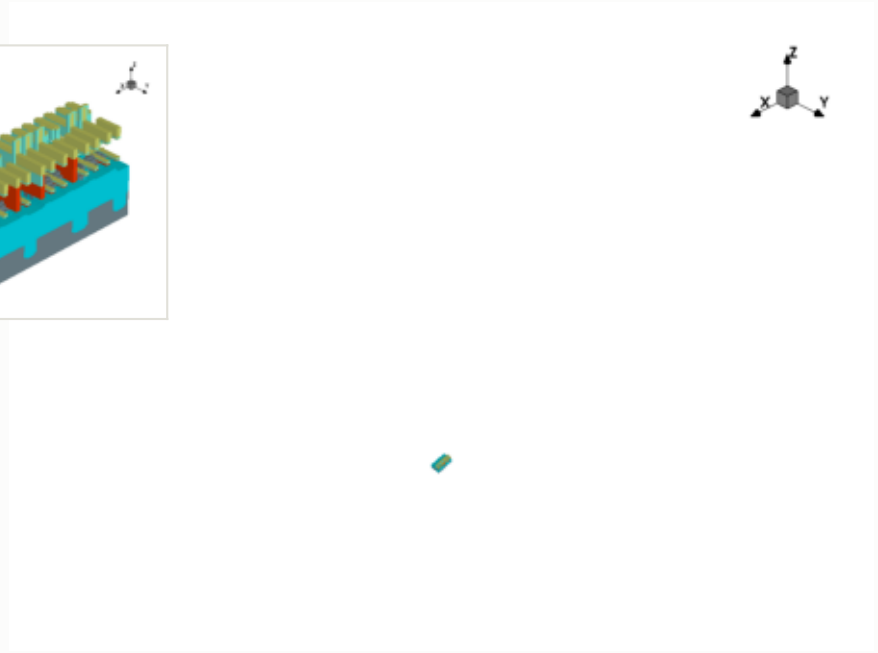

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

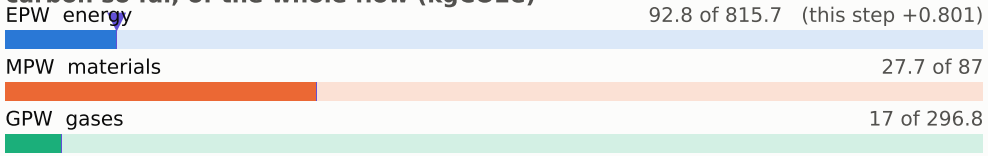

embodied carbon up to each step (kgCO2e per wafer)

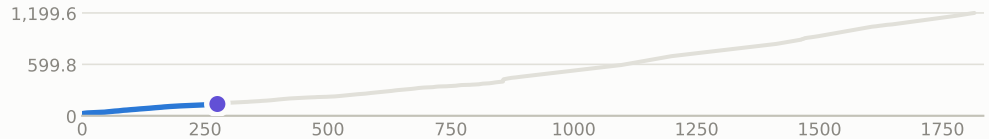

x cut at -0.570 µm

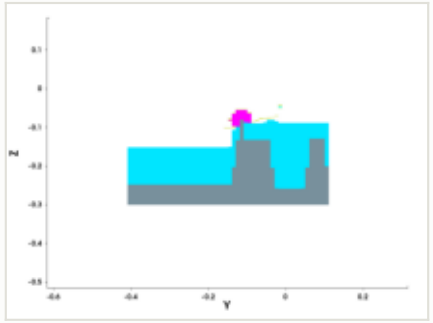

y cut at -0.150 µm

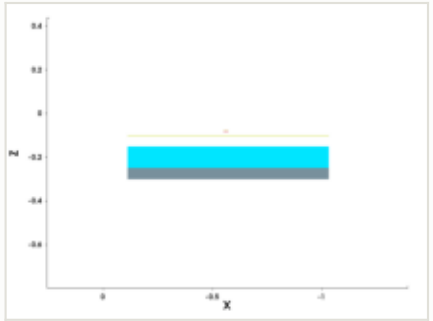

mask for this step

no mask for this step

steps by process area

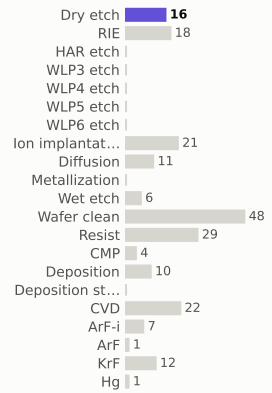

materials deposited (g)

gases emitted (g)

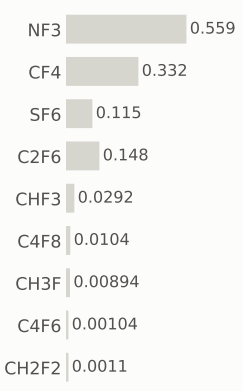

Step #2800: Wafer_clean

clean · Wafer_clean

0.169	137.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

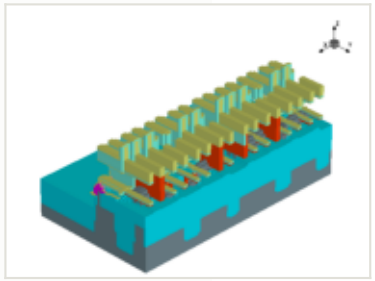

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

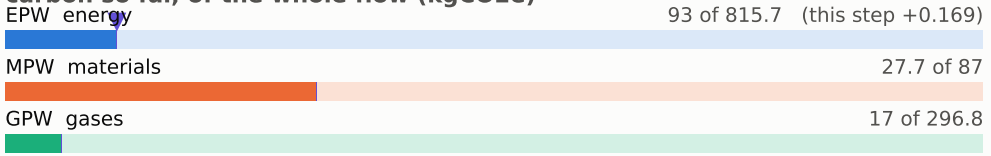

embodied carbon up to each step (kgCO2e per wafer)

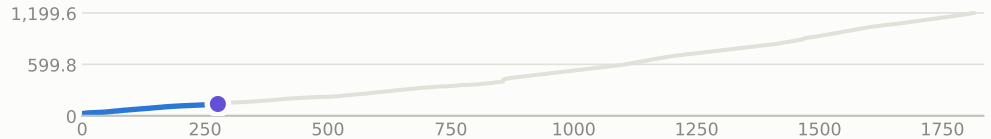

x cut at -0.570 µm

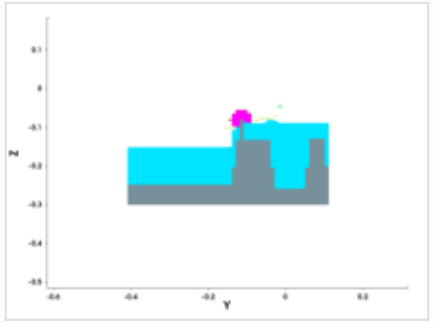

y cut at -0.150 µm

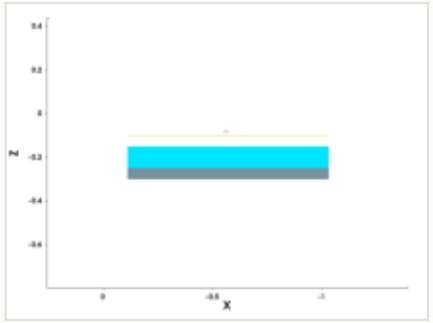

mask for this step

no mask for this step

steps by process area

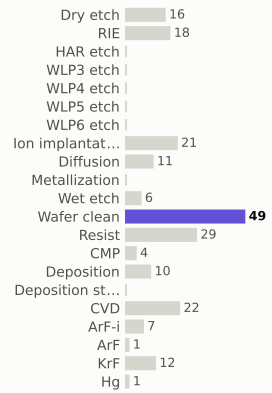

materials deposited (g)

gases emitted (g)

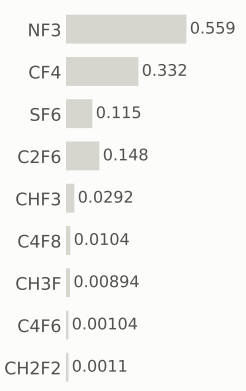

Step #2810: Resist

resist · Resist

0.169	137.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

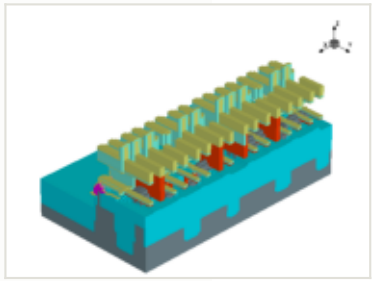

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

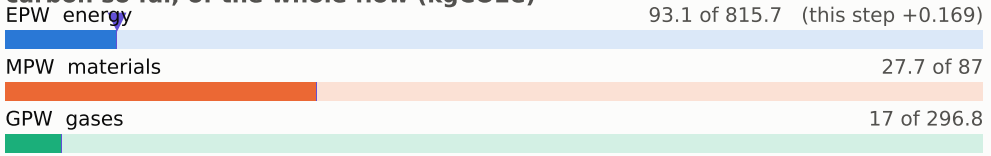

embodied carbon up to each step (kgCO2e per wafer)

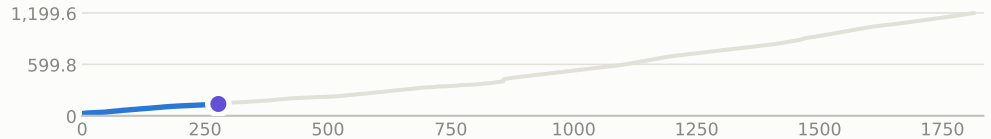

x cut at -0.570 µm

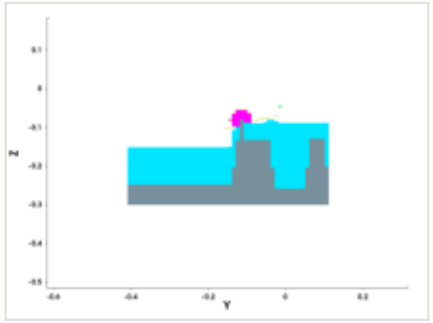

y cut at -0.150 µm

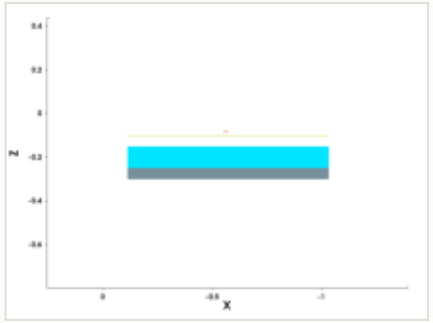

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

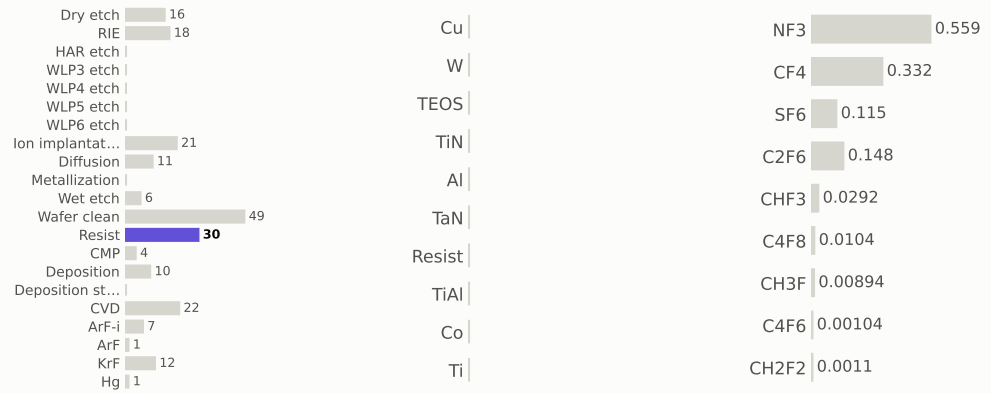

Step #2820: KrF

litho_patterning · KrF

0.199	138.1	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

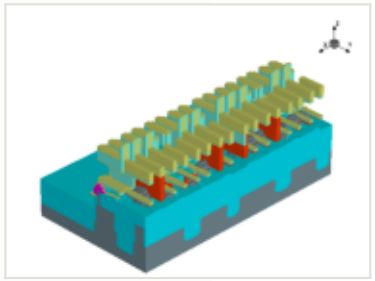

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

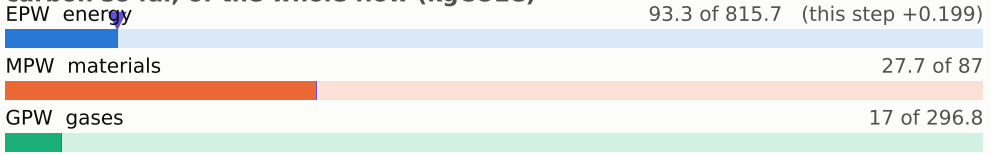

embodied carbon up to each step (kgCO2e per wafer)

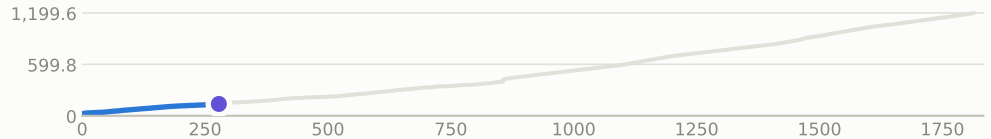

x cut at -0.570 µm

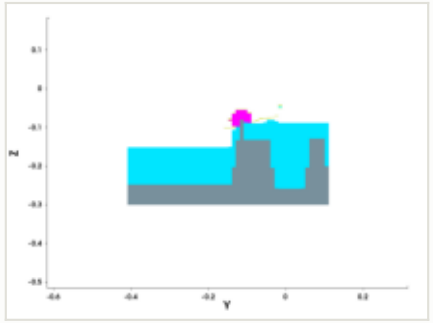

y cut at -0.150 µm

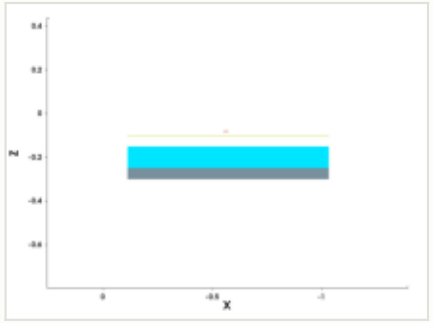

mask: layer 2100:0, positive (GDSII)

steps by process area

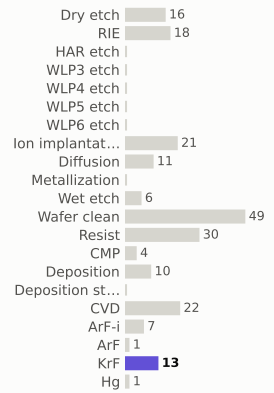

materials deposited (g)

gases emitted (g)

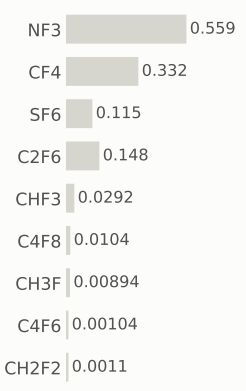

Step #2830: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	138.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

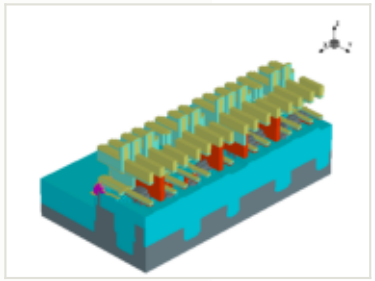

x cut at -0.570 µm

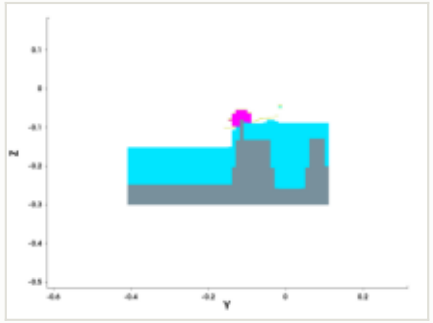

y cut at -0.150 µm

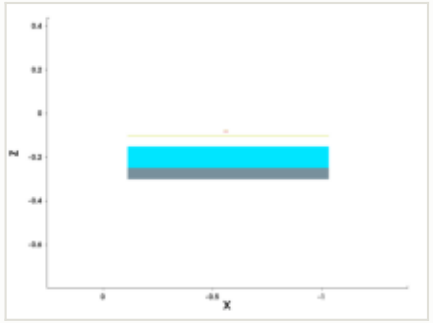

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

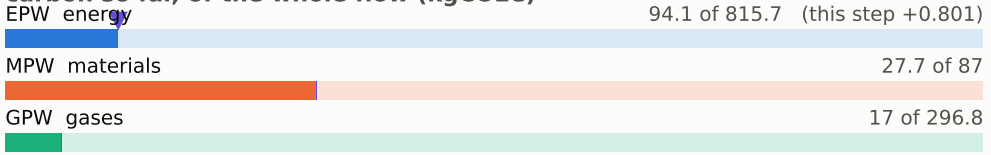

embodied carbon up to each step (kgCO2e per wafer)

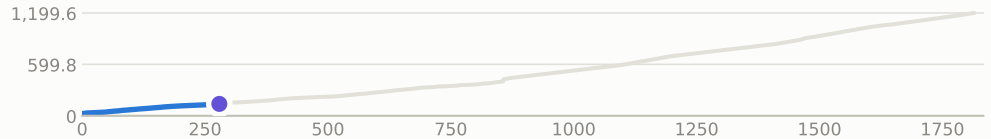

steps by process area

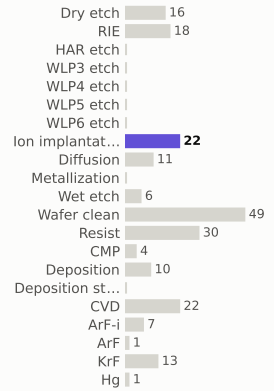

materials deposited (g)

gases emitted (g)

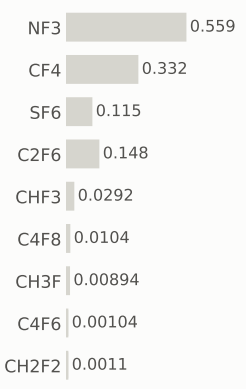

Step #2840: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	139.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

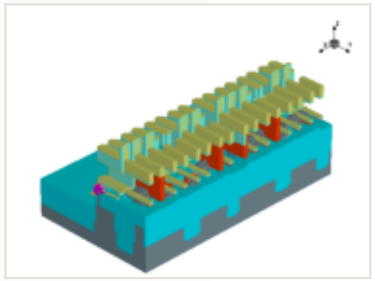

x cut at -0.570 µm

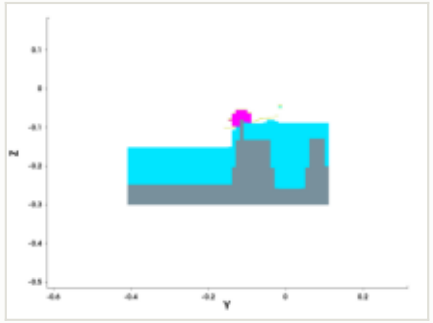

y cut at -0.150 µm

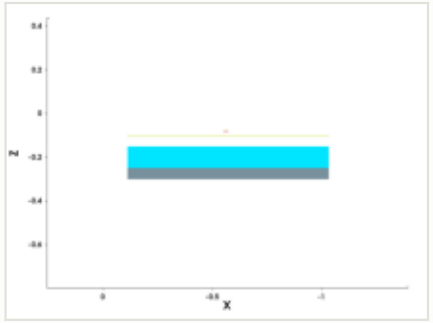

mask for this step

no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

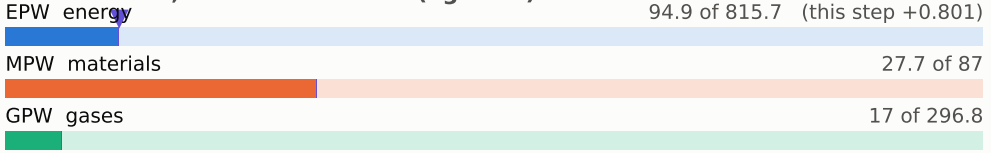

embodied carbon up to each step (kgCO2e per wafer)

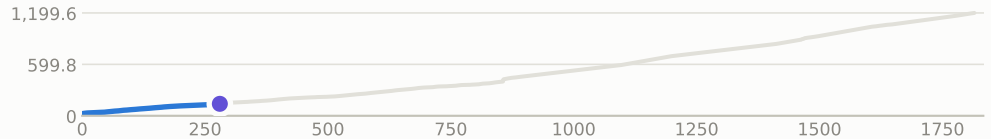

steps by process area

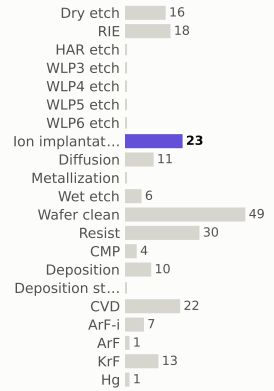

materials deposited (g)

gases emitted (g)

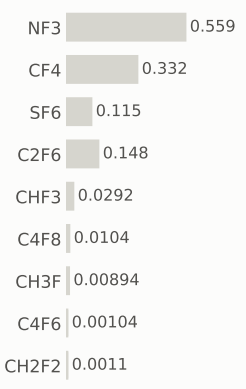

Step #2850: Dry_etch

etch_strip · Dry_etch

0.801	140.5	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

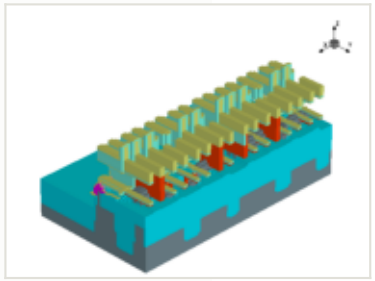

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

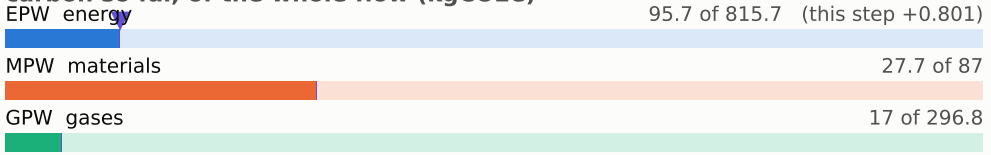

embodied carbon up to each step (kgCO2e per wafer)

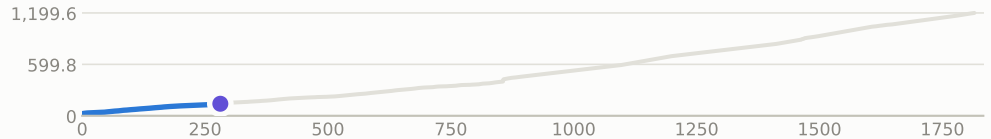

x cut at -0.570 µm

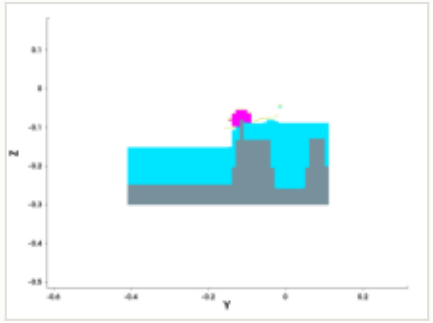

y cut at -0.150 µm

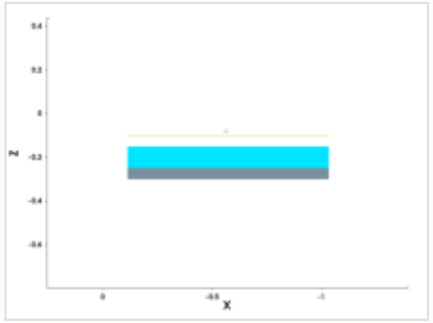

mask for this step

no mask for this step

steps by process area

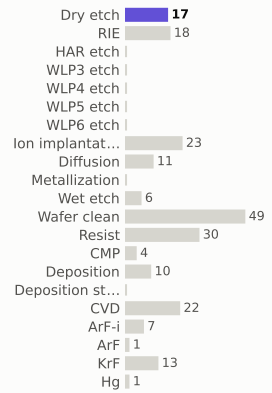

materials deposited (g)

gases emitted (g)

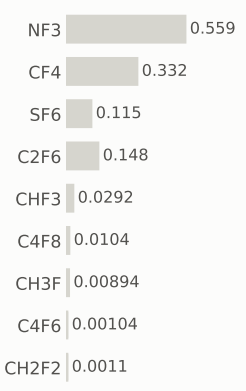

Step #2860: Wafer_clean

clean · Wafer_clean

0.169	140.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

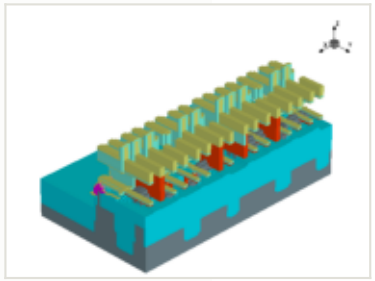

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

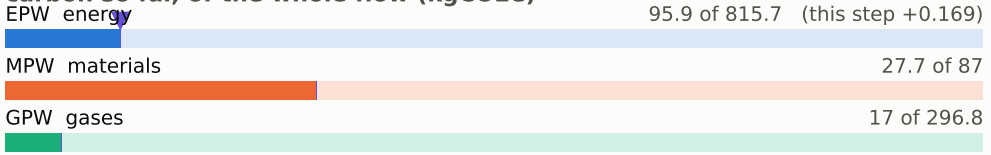

embodied carbon up to each step (kgCO2e per wafer)

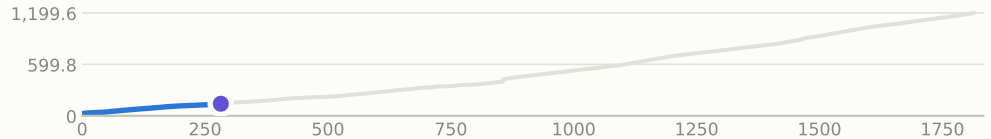

x cut at -0.570 µm

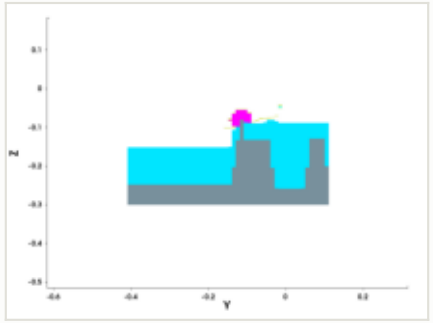

y cut at -0.150 µm

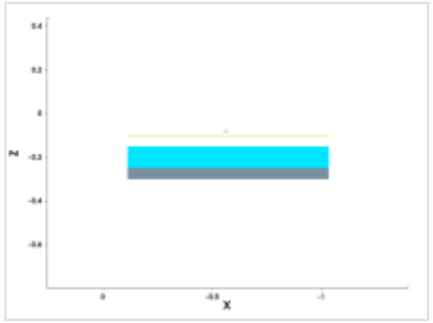

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

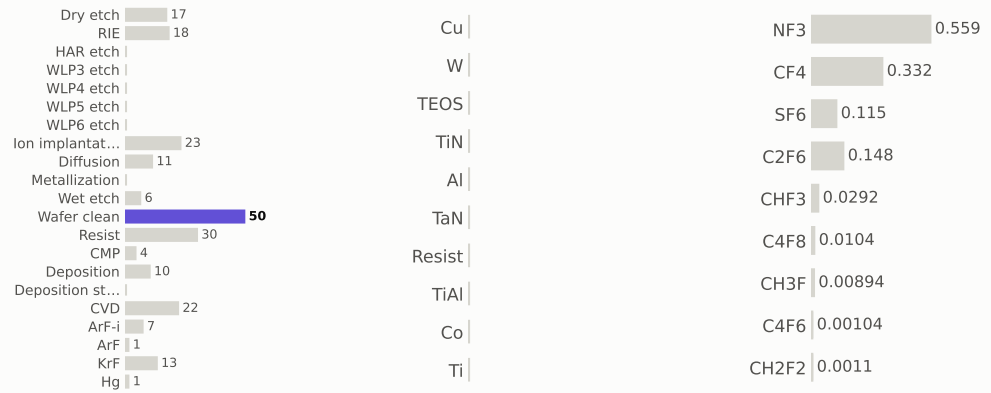

Step #2870: Diffusion

anneal · Diffusion

0.801	141.5	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

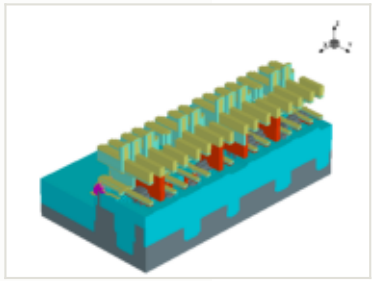

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

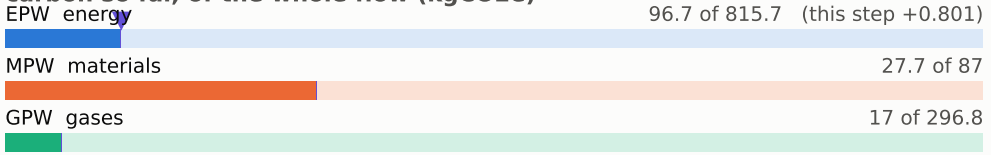

embodied carbon up to each step (kgCO2e per wafer)

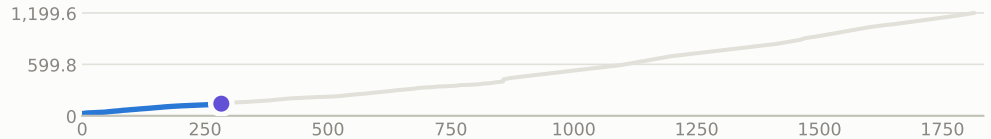

x cut at -0.570 µm

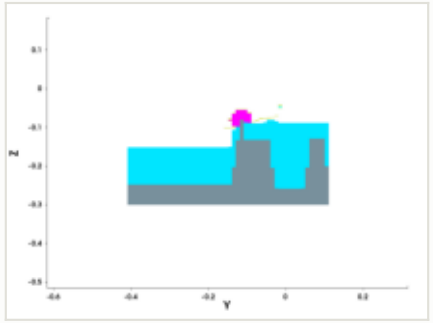

y cut at -0.150 µm

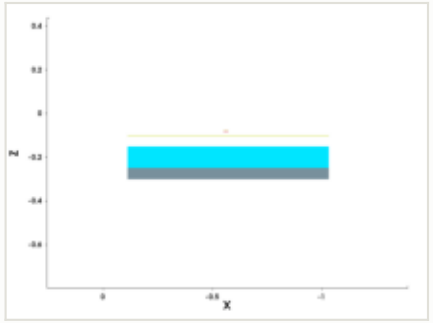

mask for this step

no mask for this step

steps by process area

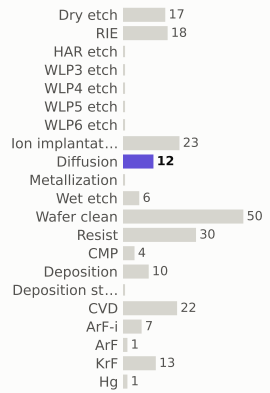

materials deposited (g)



gases emitted (g)

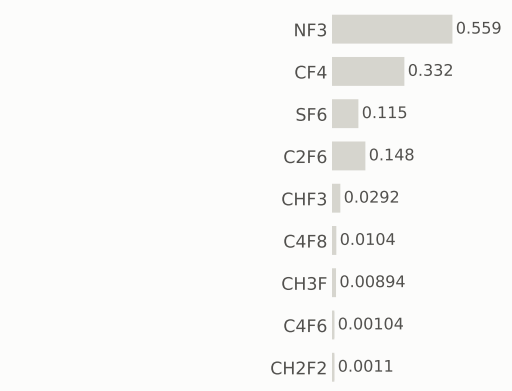

Step #2890: Wet_etch

etch_isotropic · Wet_etch

0.169	141.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

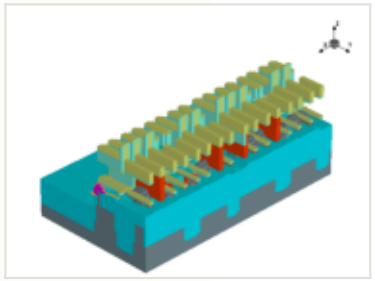

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

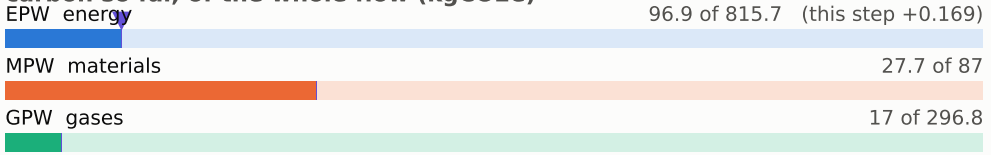

embodied carbon up to each step (kgCO2e per wafer)

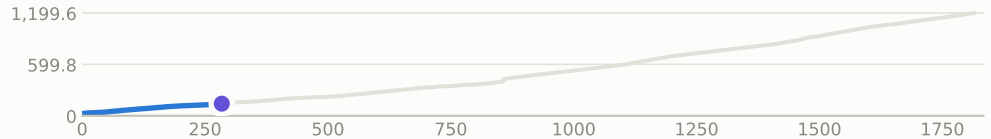

x cut at -0.570 µm

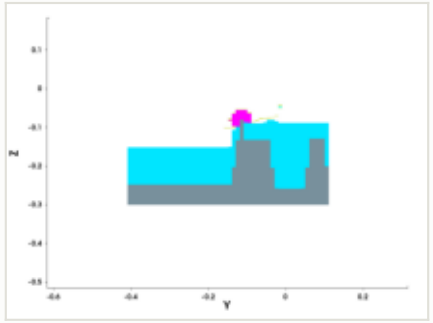

y cut at -0.150 µm

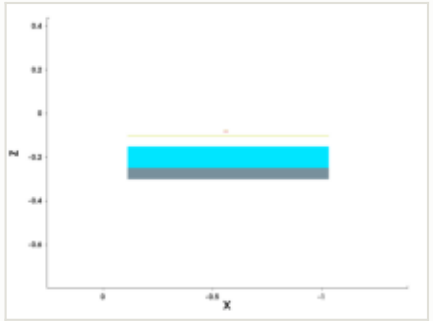

mask for this step

no mask for this step

steps by process area

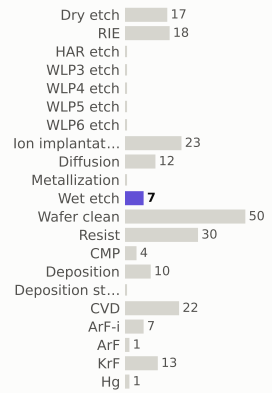

materials deposited (g)

gases emitted (g)

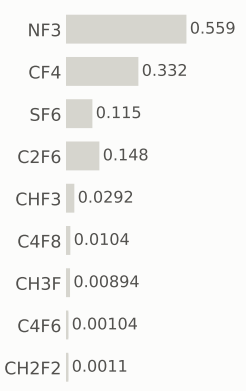

Step #2900: Deposition

depo_isotropic · Deposition

0.656	142.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

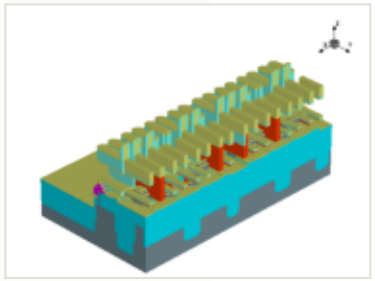

this step

process area	Deposition
material	—
thickness	0.0025 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

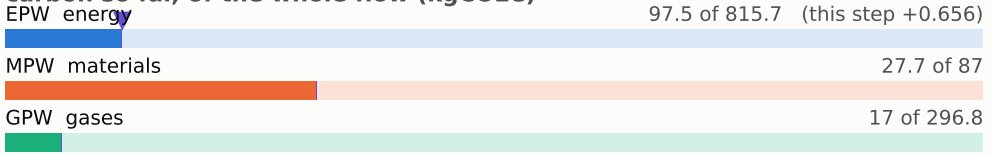

embodied carbon up to each step (kgCO2e per wafer)

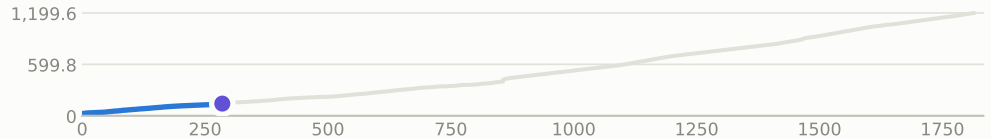

x cut at -0.570 µm

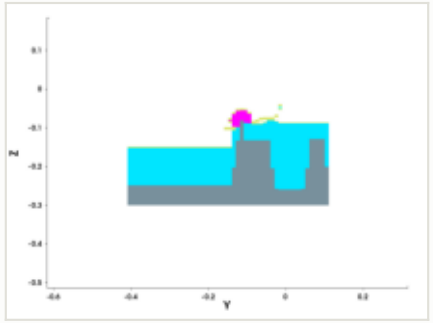

y cut at -0.150 µm

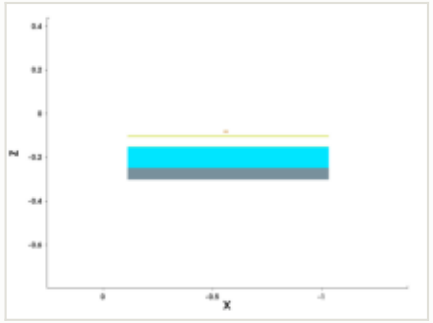

mask for this step

no mask for this step

steps by process area

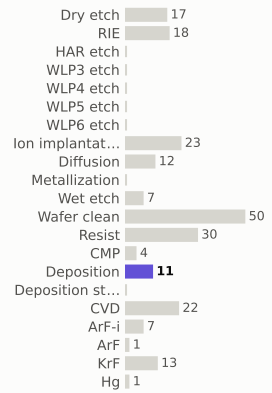

materials deposited (g)

gases emitted (g)

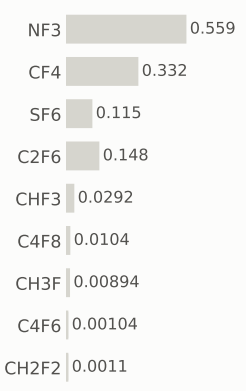

Step #2910: Deposition

depo_isotropic · Deposition

0.656	142.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

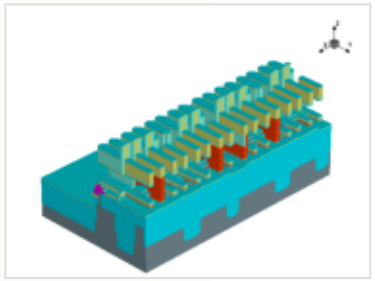

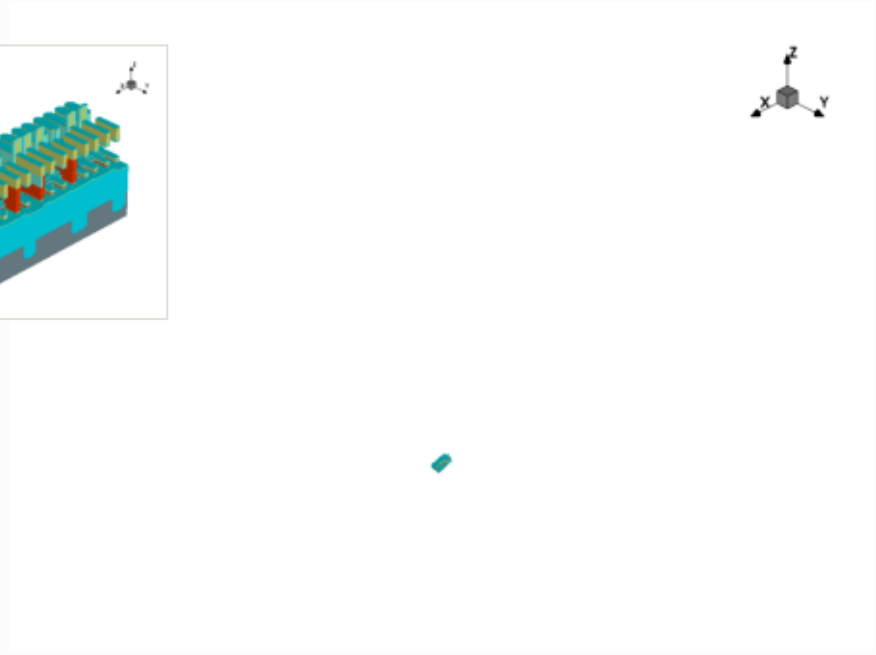

this step

process area	Deposition
material	—
thickness	0.0035 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

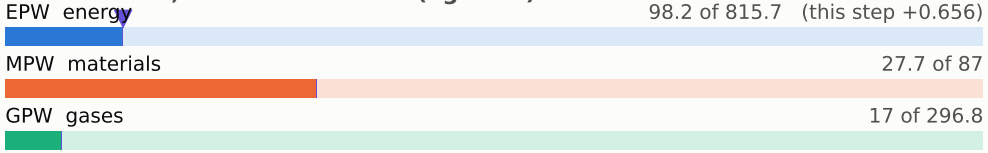

embodied carbon up to each step (kgCO2e per wafer)

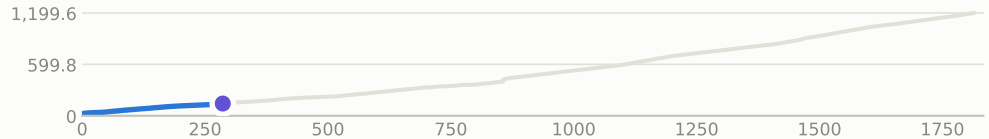

x cut at -0.570 µm

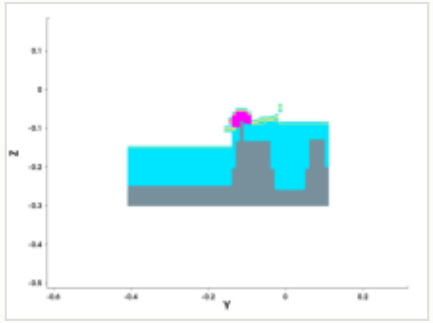

y cut at -0.150 µm

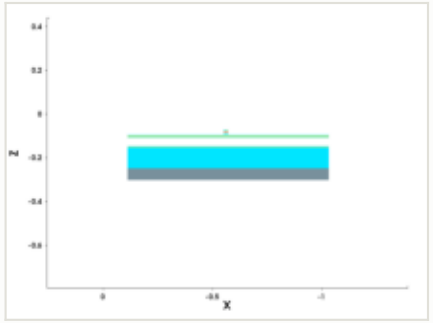

mask for this step

no mask for this step

steps by process area

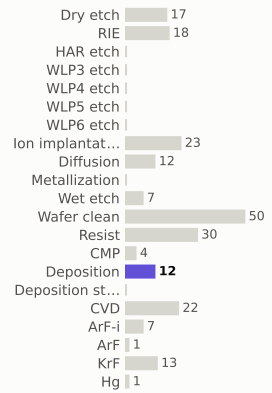

materials deposited (g)

gases emitted (g)

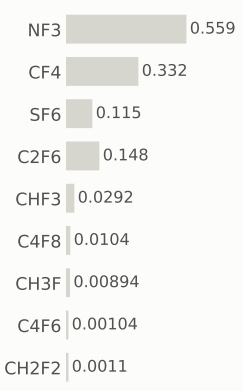

Step #2920: CVD

depo_fill · CVD

1.31	144.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

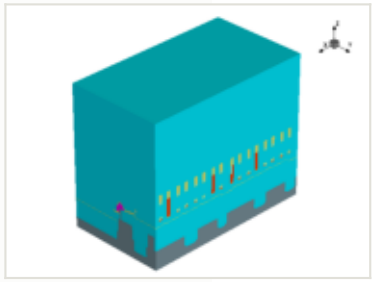

this step

process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

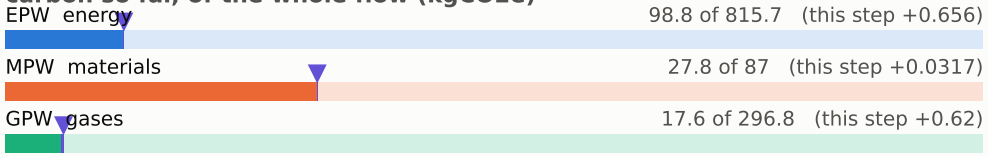

embodied carbon up to each step (kgCO2e per wafer)

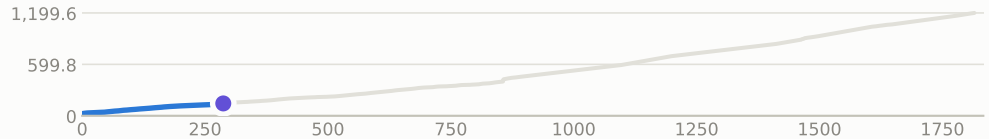

x cut at -0.570 µm

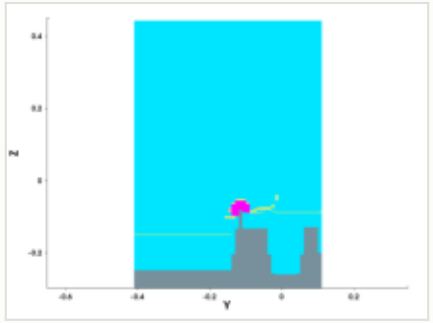

y cut at -0.150 µm

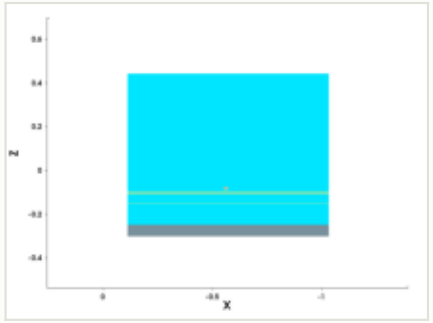

mask for this step

no mask for this step

steps by process area

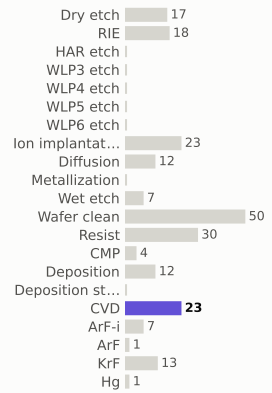

materials deposited (g)

gases emitted (g)



Step #2930: Diffusion

anneal · Diffusion

0.801	145.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

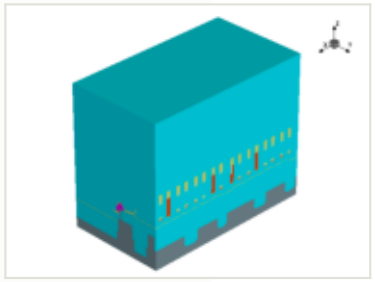

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

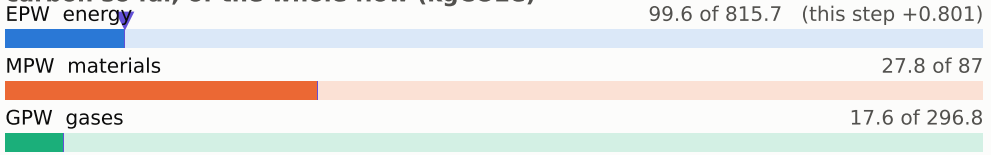

embodied carbon up to each step (kgCO2e per wafer)

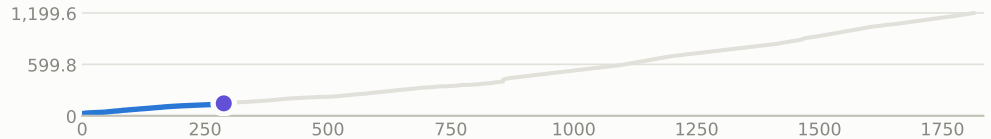

x cut at -0.570 µm

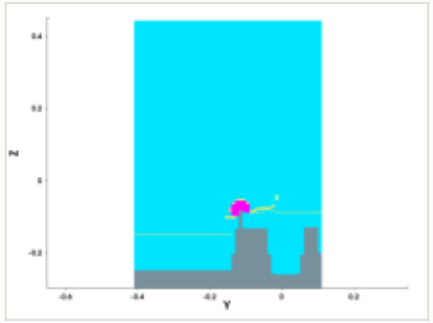

y cut at -0.150 µm

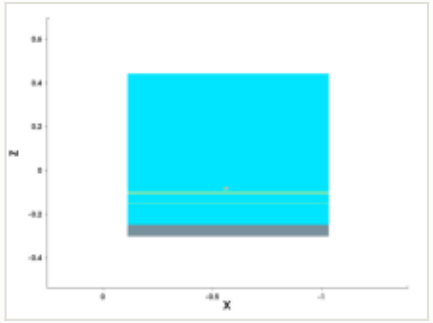

mask for this step

no mask for this step

steps by process area

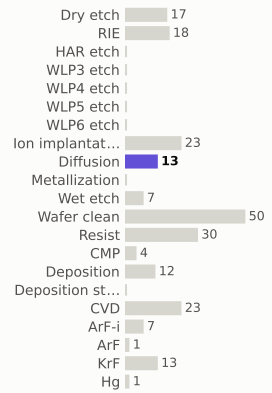

materials deposited (g)

gases emitted (g)

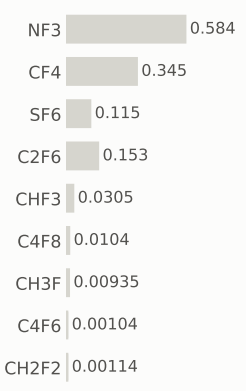

Step #2940: CVD

depo_fill · CVD

1.31	146.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

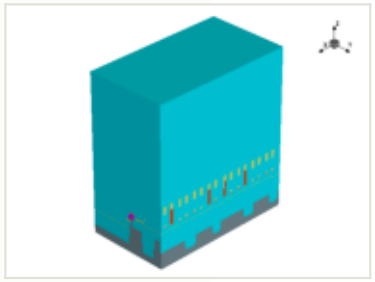

this step

process area	CVD
material	—
thickness	0.25 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

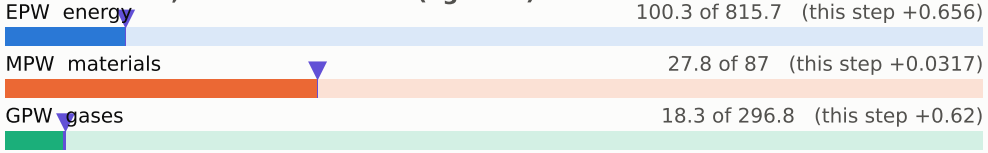

embodied carbon up to each step (kgCO2e per wafer)

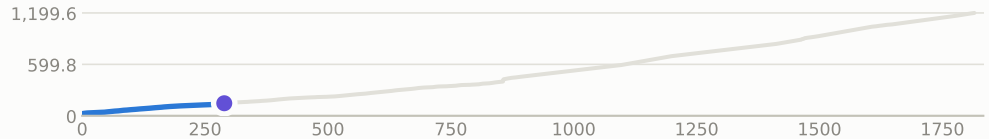

x cut at -0.570 µm

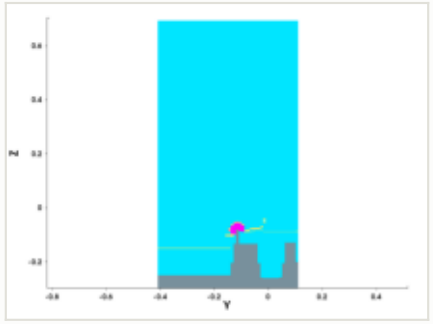

y cut at -0.150 µm

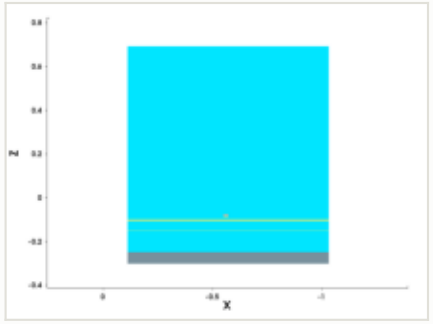

mask for this step

no mask for this step

steps by process area

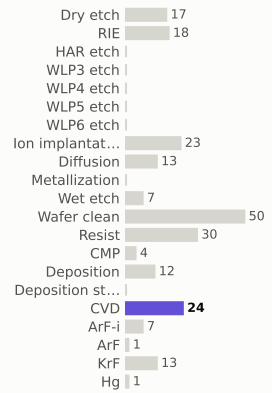

materials deposited (g)

gases emitted (g)

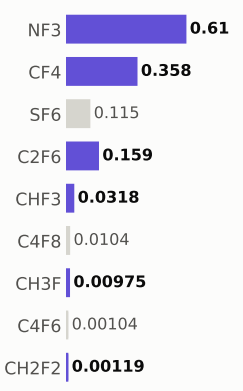

Step #2950: CMP

etch_cmp · CMP

0.169	146.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

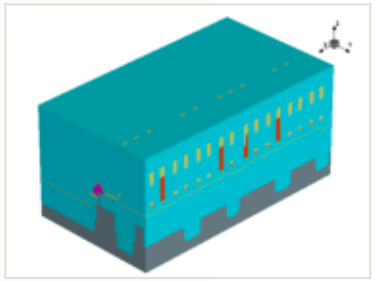

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

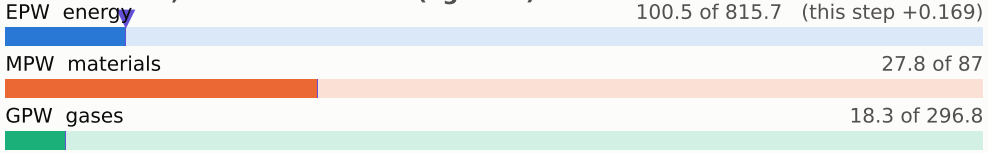

embodied carbon up to each step (kgCO2e per wafer)

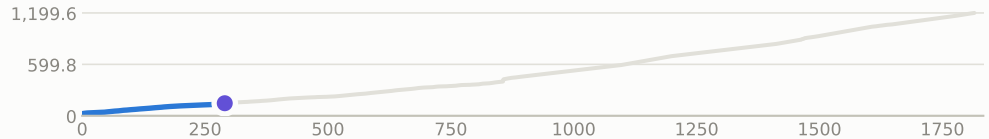

x cut at -0.570 µm

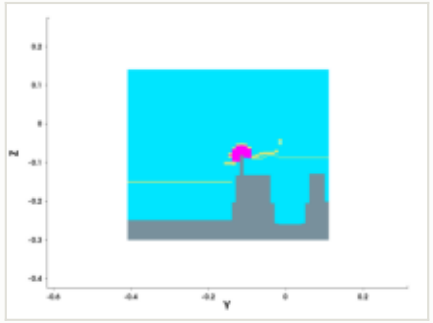

y cut at -0.150 µm

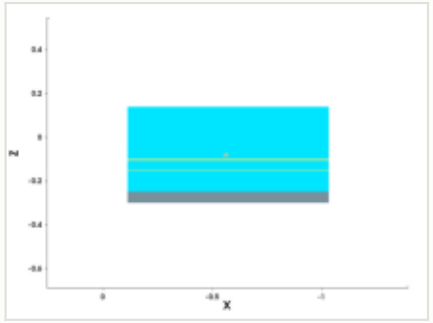

mask for this step

no mask for this step

steps by process area

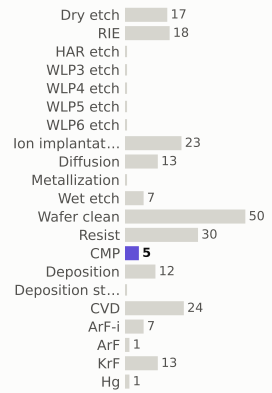

materials deposited (g)



gases emitted (g)

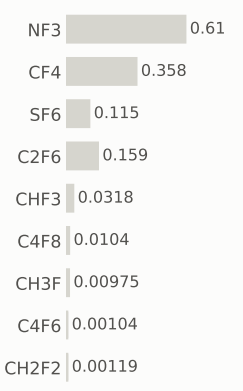

Step #2960: Dry_etch

etch_isotropic · Dry_etch

0.801	147.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

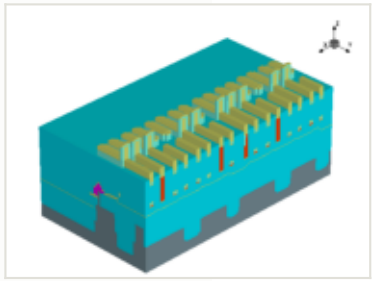

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy 101.3 of 815.7 (this step +0.801)

MPW materials 27.8 of 87

GPW gases 18.3 of 296.8

embodied carbon up to each step (kgCO2e per wafer)

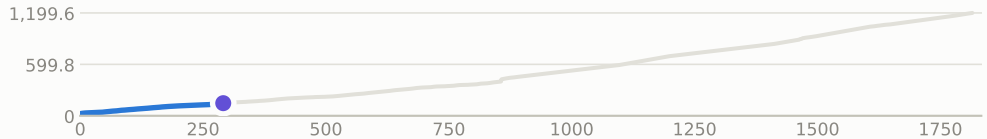

x cut at -0.570 µm

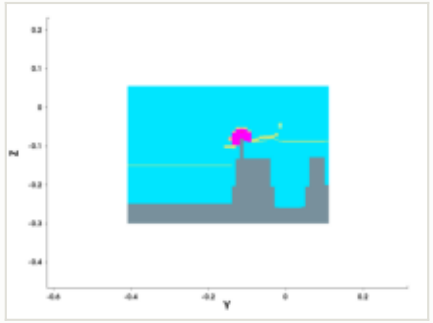

y cut at -0.150 µm

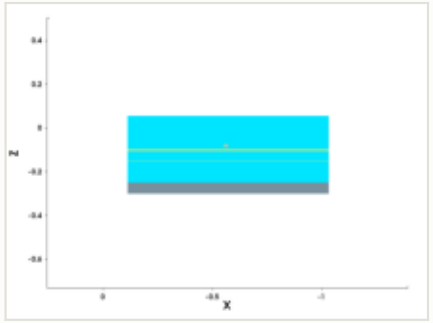

mask for this step

no mask for this step

steps by process area

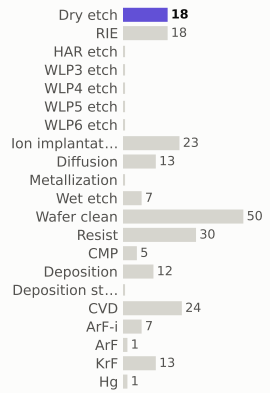

materials deposited (g)

gases emitted (g)

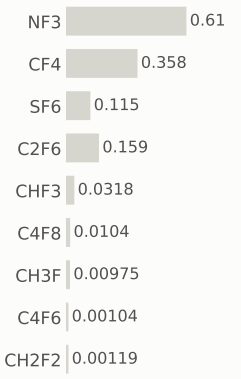

Step #2970: Wafer_clean

clean · Wafer_clean

0.169	147.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

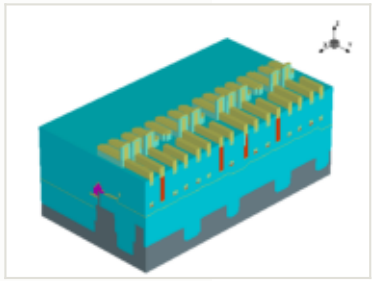

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

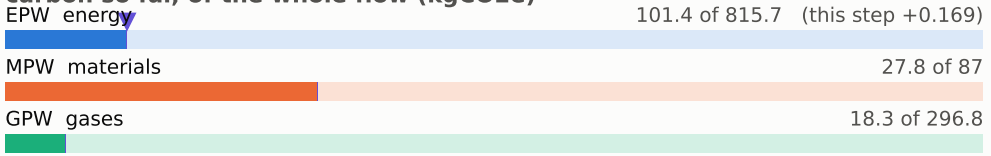

embodied carbon up to each step (kgCO2e per wafer)

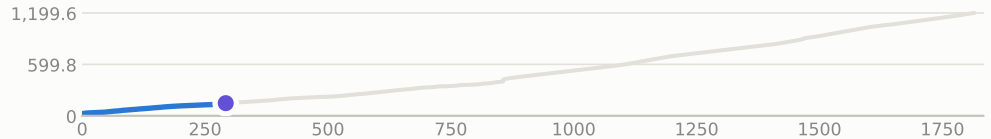

x cut at -0.570 µm

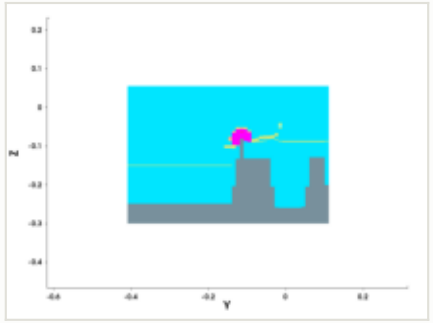

y cut at -0.150 µm

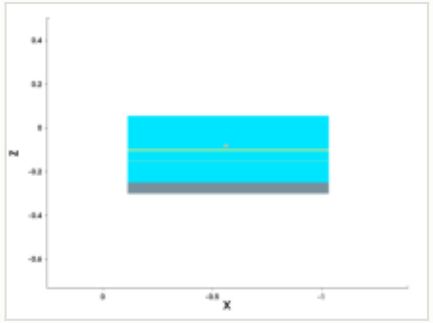

mask for this step

no mask for this step

steps by process area

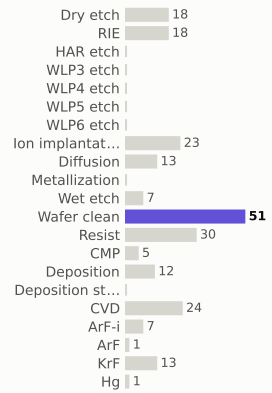

materials deposited (g)

gases emitted (g)

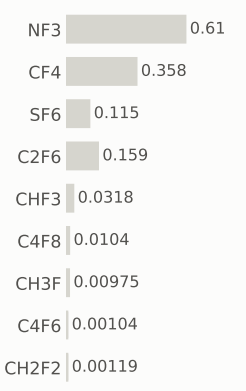

Step #2980: Deposition

depo_fill · Deposition

0.656	148.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

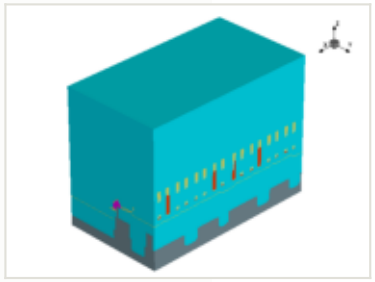

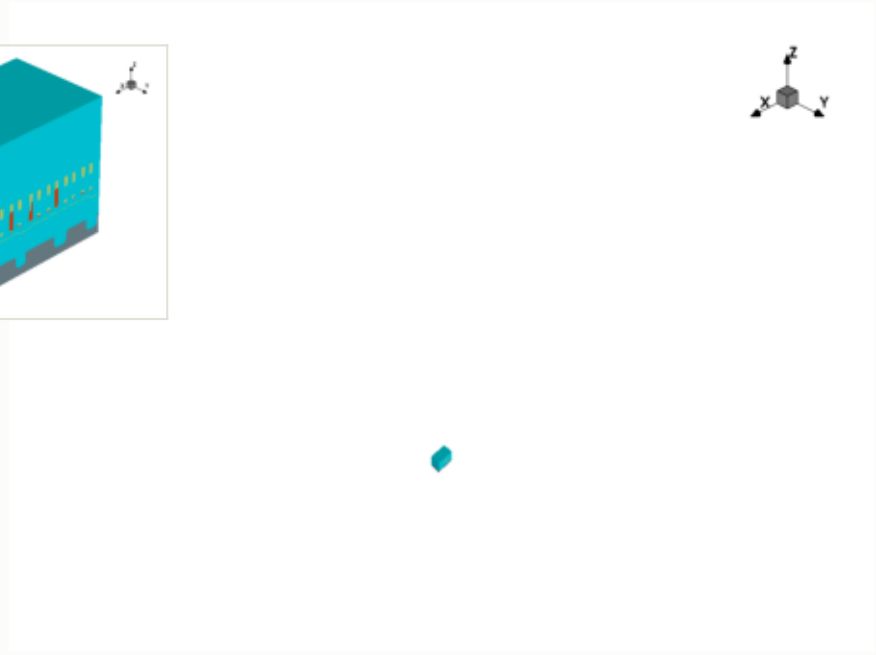

this step

process area	Deposition
material	—
thickness	0.25 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

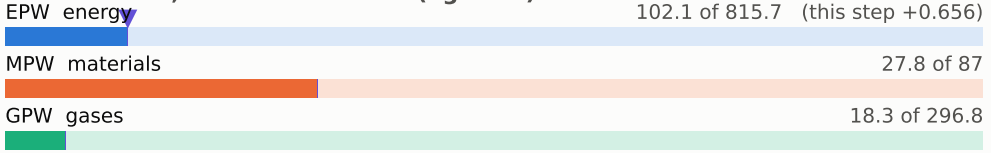

embodied carbon up to each step (kgCO2e per wafer)

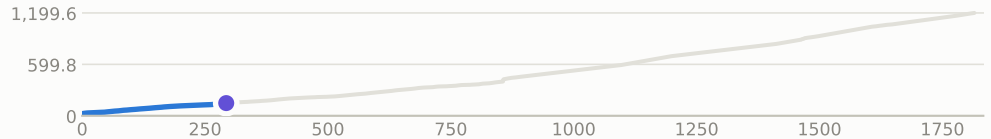

x cut at -0.570 µm

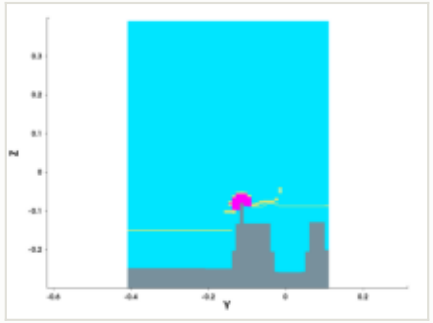

y cut at -0.150 µm

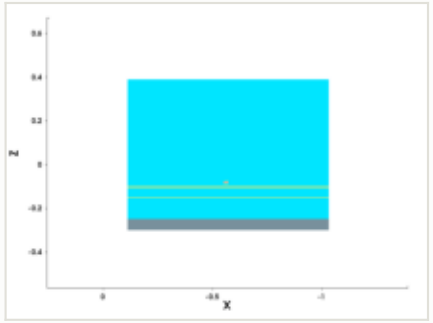

mask for this step

no mask for this step

steps by process area

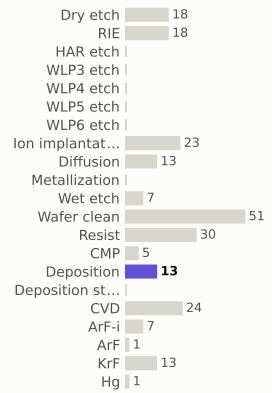

materials deposited (g)

gases emitted (g)

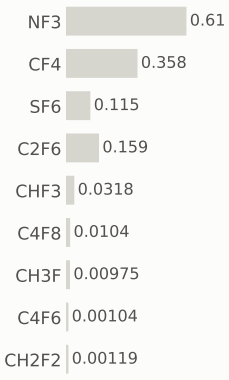

Step #2990: Wafer_clean

clean · Wafer_clean

0.169	148.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

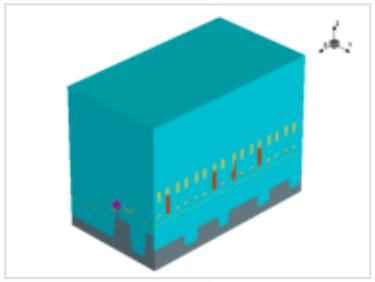

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

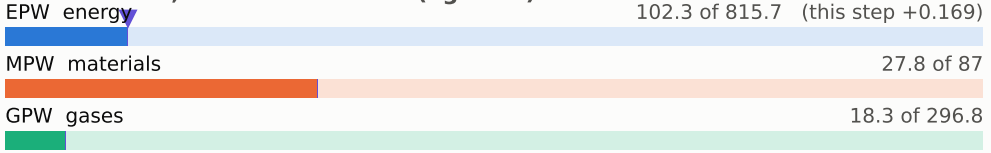

embodied carbon up to each step (kgCO2e per wafer)

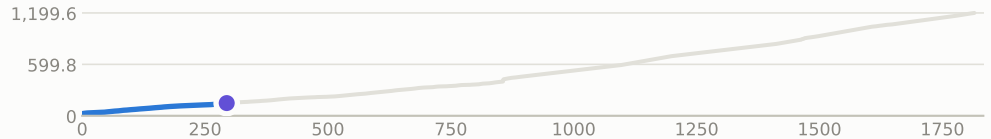

x cut at -0.570 µm

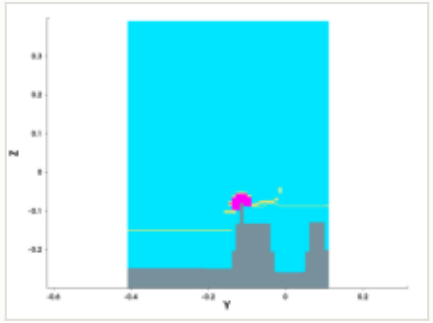

y cut at -0.150 µm

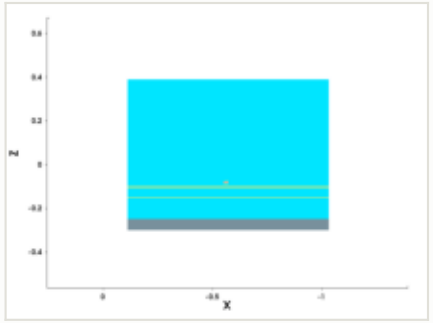

mask for this step

no mask for this step

steps by process area

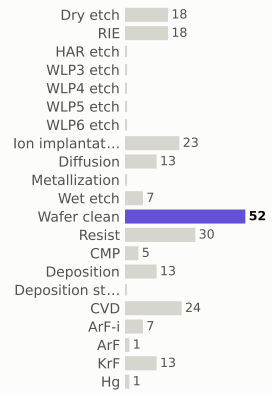

materials deposited (g)



gases emitted (g)

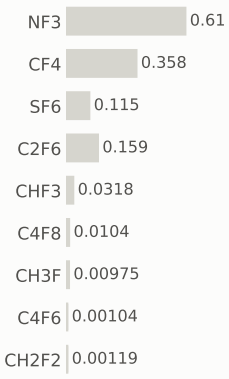

Step #3000: CMP

etch_cmp · CMP

0.169	148.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

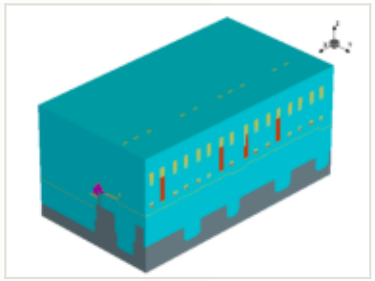

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

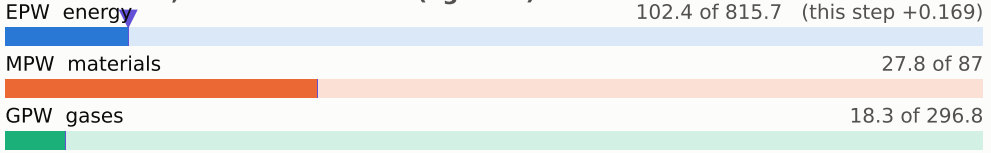

embodied carbon up to each step (kgCO2e per wafer)

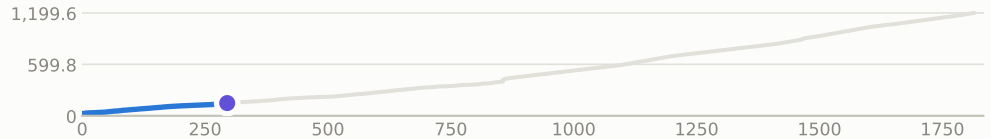

x cut at -0.570 µm

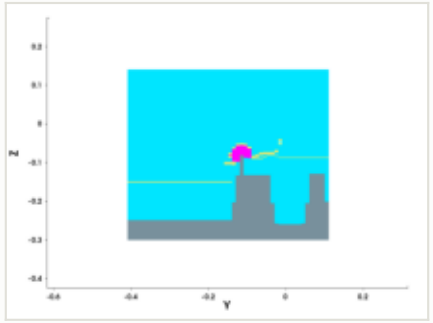

y cut at -0.150 µm

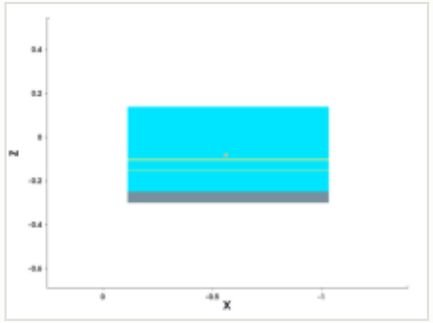

mask for this step

no mask for this step

steps by process area

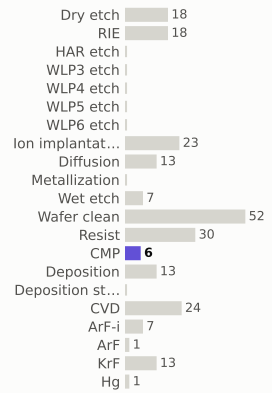

materials deposited (g)



gases emitted (g)

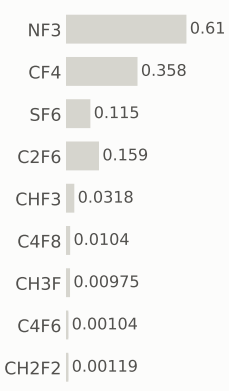

Step #3010: Resist

depo_fill · Resist

0.169	148.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

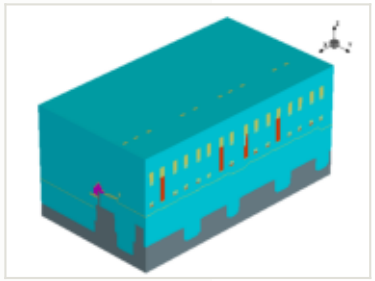

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.15 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

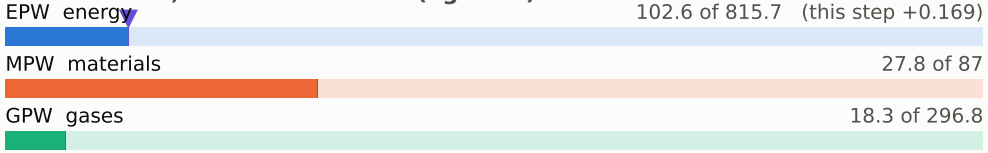

embodied carbon up to each step (kgCO2e per wafer)

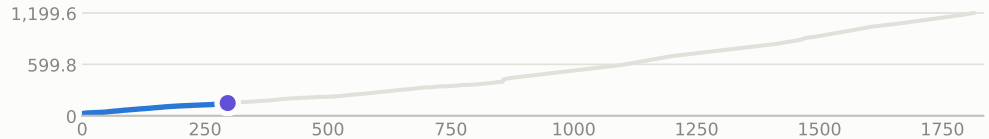

x cut at -0.570 µm

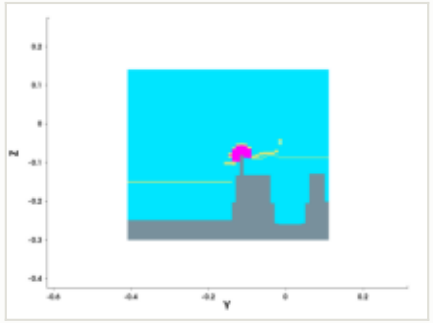

y cut at -0.150 µm

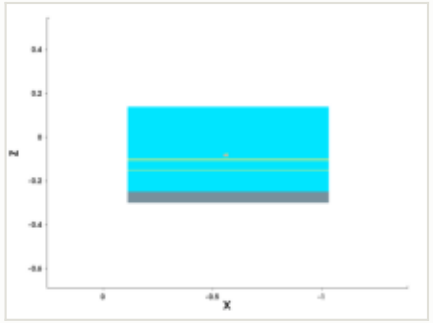

mask for this step

no mask for this step

steps by process area

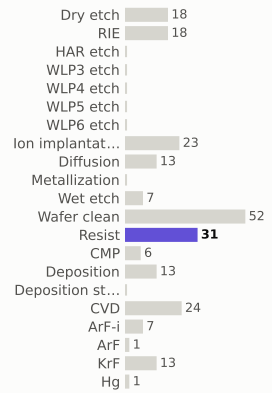

materials deposited (g)



gases emitted (g)

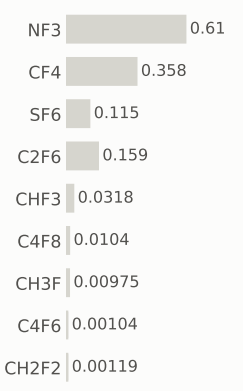

Step #3020: CVD

depo_fill · CVD

1.31	150.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

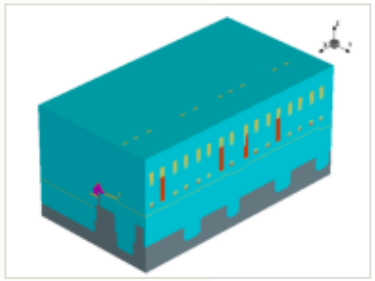

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

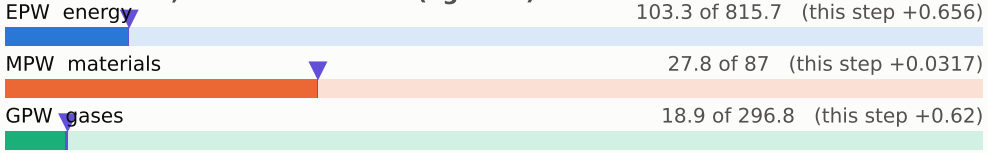

embodied carbon up to each step (kgCO2e per wafer)

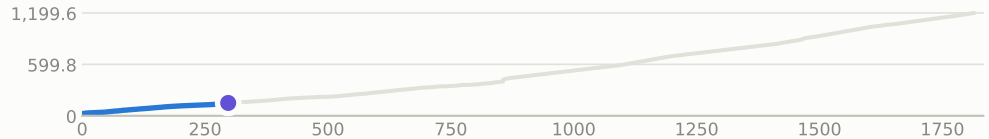

x cut at -0.570 µm

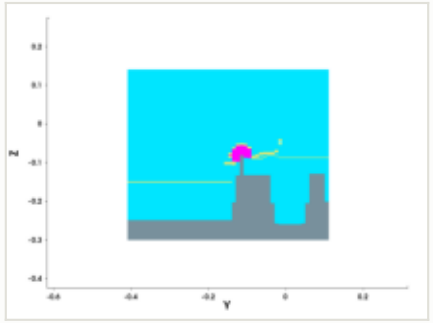

y cut at -0.150 µm

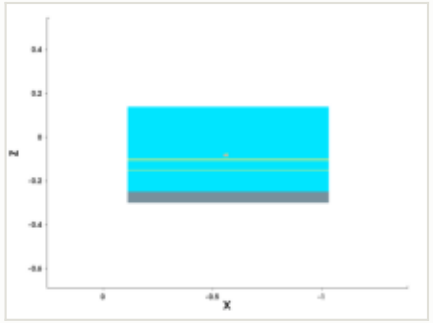

mask for this step

no mask for this step

steps by process area

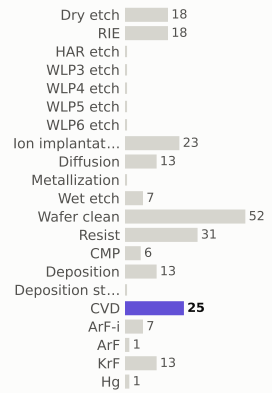

materials deposited (g)

gases emitted (g)

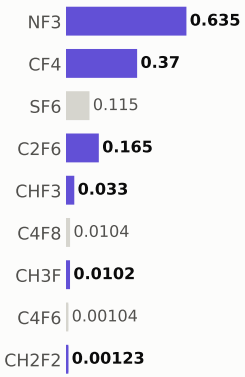

Step #3030: CVD

depo_fill · CVD

1.31	151.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

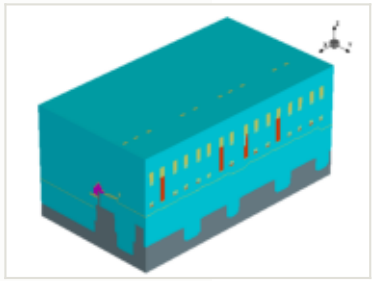

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

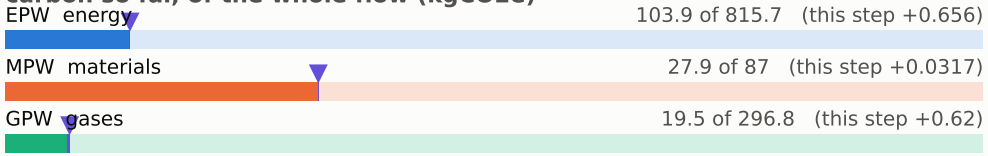

embodied carbon up to each step (kgCO2e per wafer)

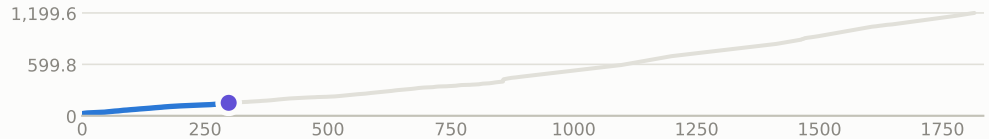

x cut at -0.570 µm

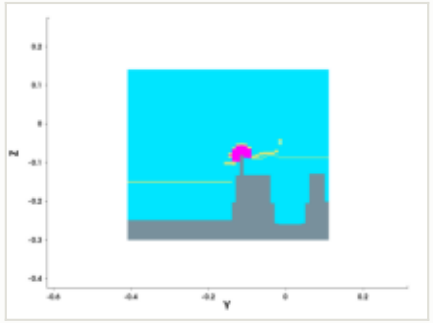

y cut at -0.150 µm

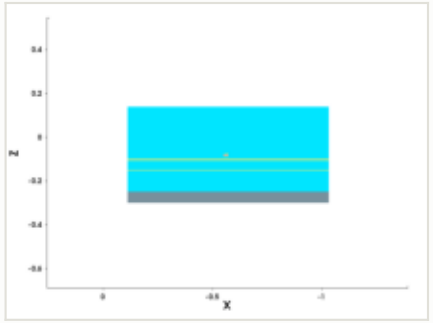

mask for this step

no mask for this step

steps by process area

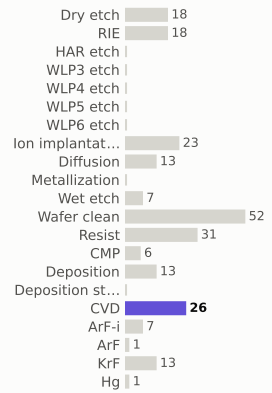

materials deposited (g)

gases emitted (g)

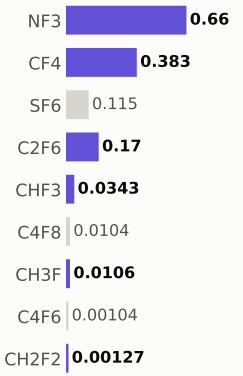

Step #3040: Resist

depo_fill · Resist

0.169	151.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

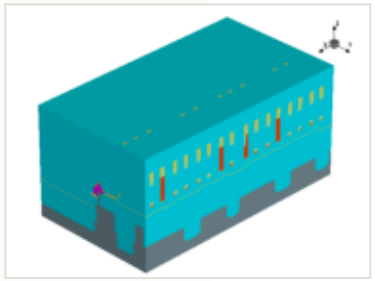

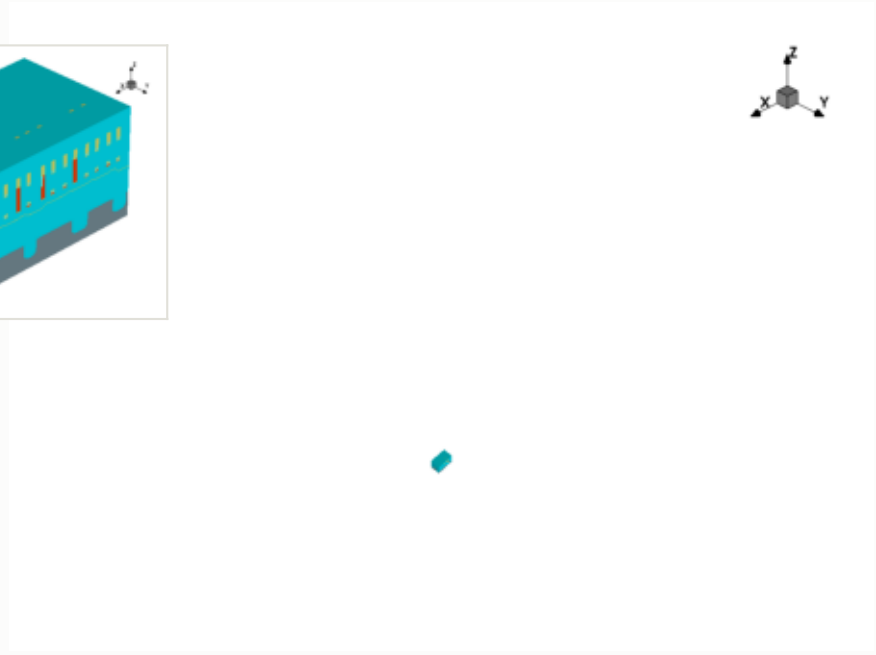

this step

process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

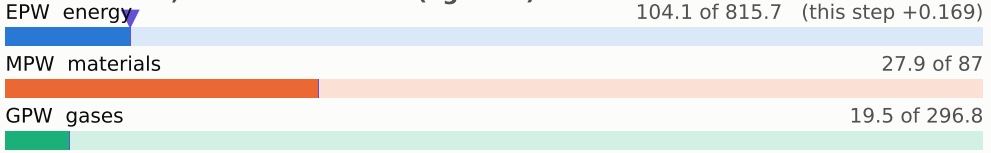

embodied carbon up to each step (kgCO2e per wafer)

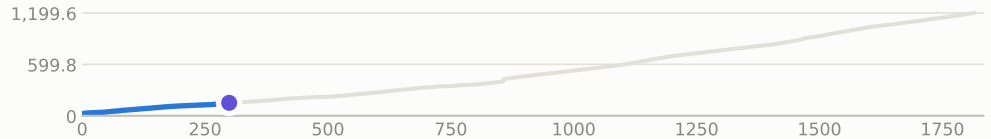

x cut at -0.570 µm

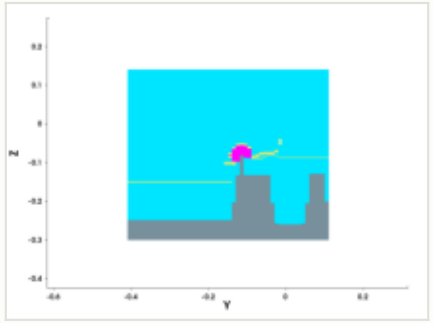

y cut at -0.150 µm

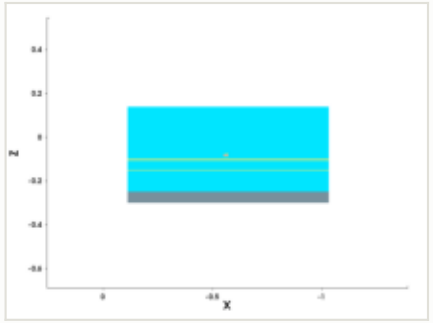

mask for this step

no mask for this step

steps by process area

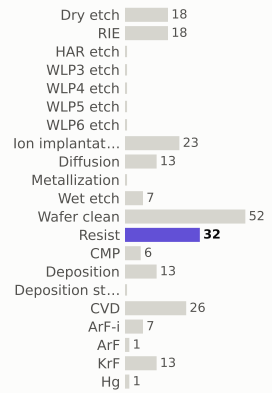

materials deposited (g)

gases emitted (g)

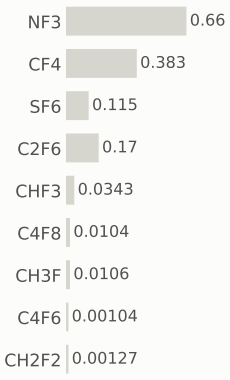

Step #3050: CVD

depo_fill · CVD

1.31	152.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

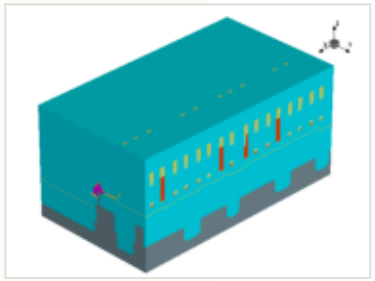

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.035 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

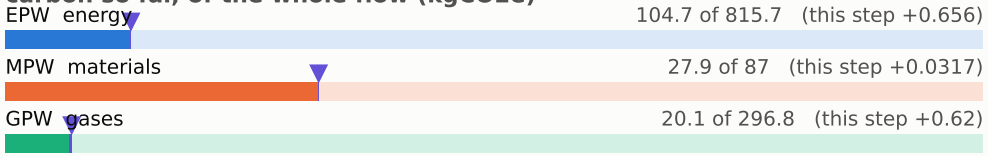

embodied carbon up to each step (kgCO2e per wafer)

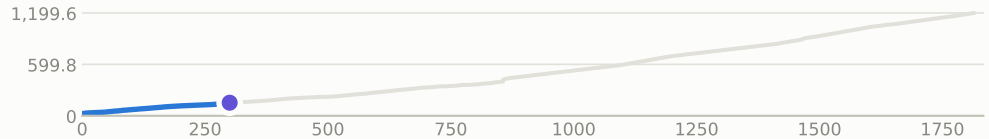

x cut at -0.570 µm

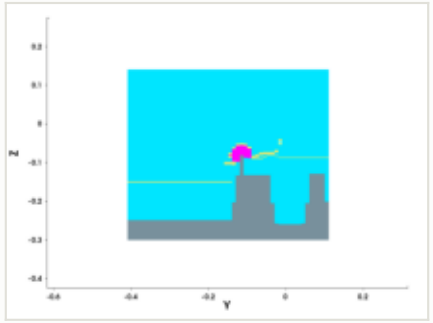

y cut at -0.150 µm

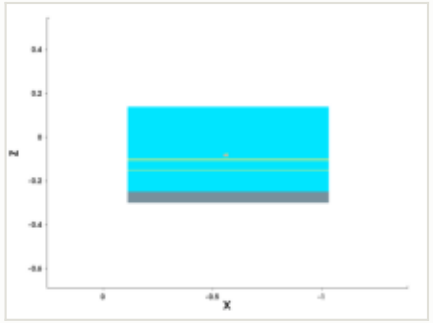

mask for this step

no mask for this step

steps by process area

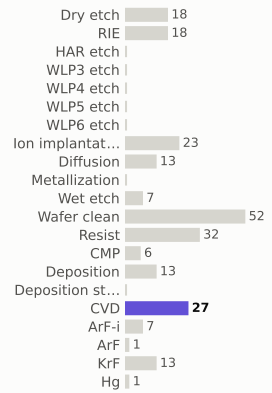

materials deposited (g)

gases emitted (g)

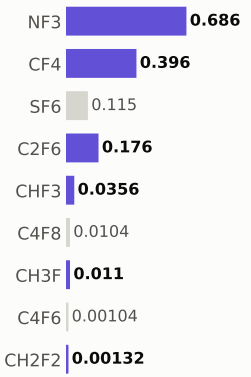

Step #3060: Wafer_clean

clean · Wafer_clean

0.169	152.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

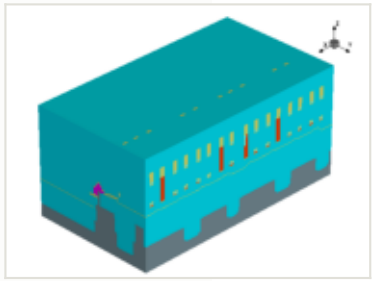

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

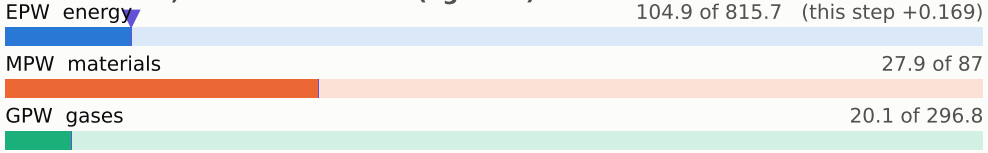

embodied carbon up to each step (kgCO2e per wafer)

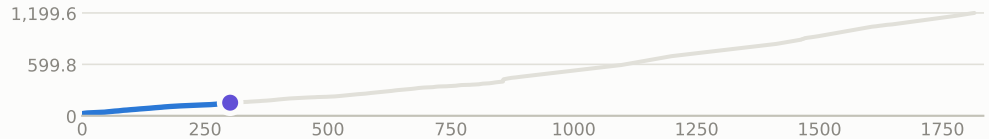

x cut at -0.570 µm

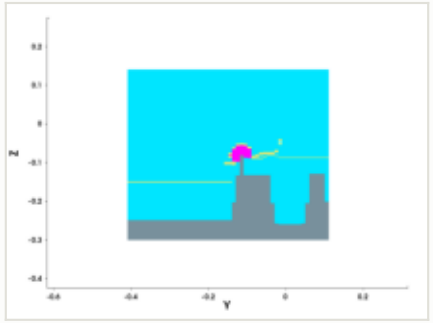

y cut at -0.150 µm

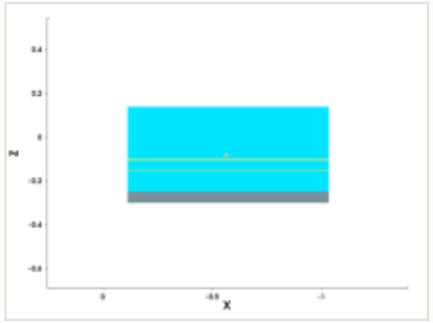

mask for this step

no mask for this step

steps by process area

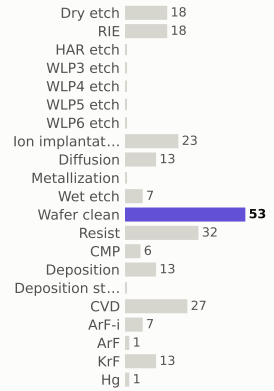

materials deposited (g)

gases emitted (g)

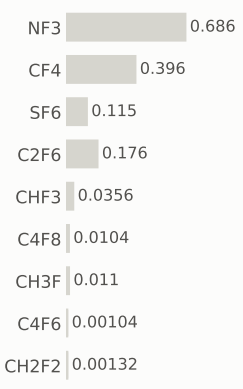

Step #3070: Resist

resist · Resist

0.169	153.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

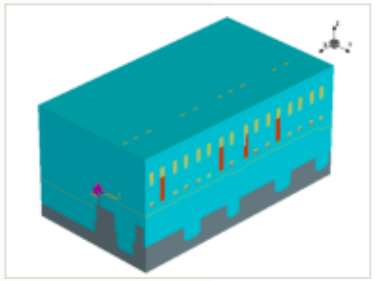

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

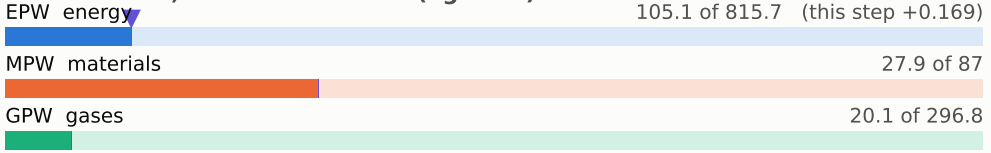

embodied carbon up to each step (kgCO2e per wafer)

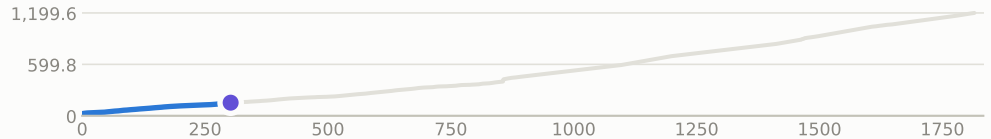

x cut at -0.570 µm

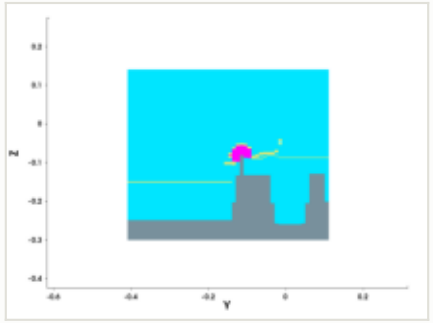

y cut at -0.150 µm

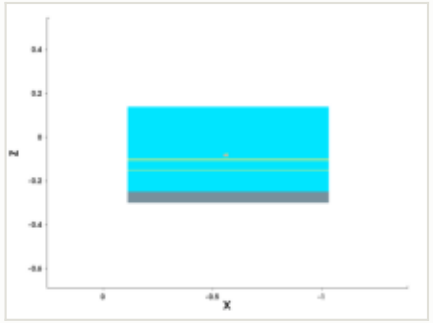

mask for this step

no mask for this step

steps by process area

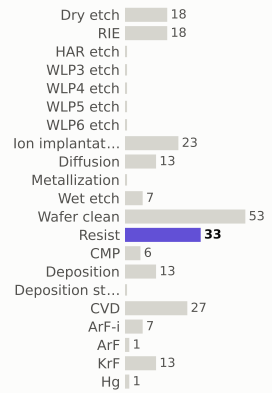

materials deposited (g)

gases emitted (g)

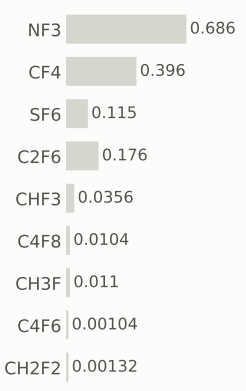

Step #3080: ArF-i

litho_patterning · ArF-i

0.217	153.3	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

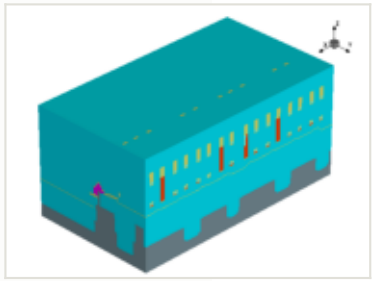

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

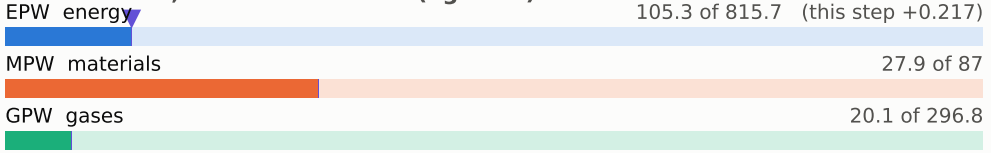

embodied carbon up to each step (kgCO2e per wafer)

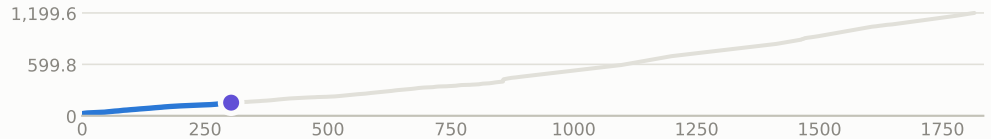

x cut at -0.570 µm

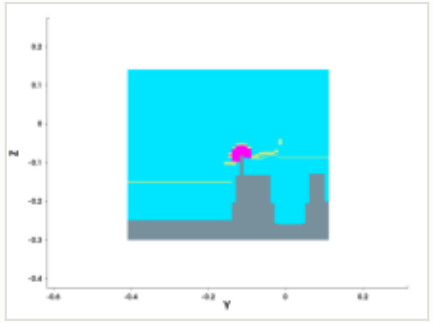

y cut at -0.150 µm

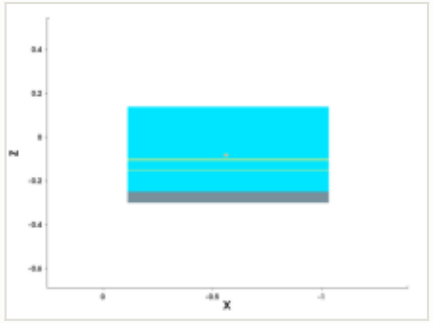

mask: layer 2088:0 (GDSII)

steps by process area

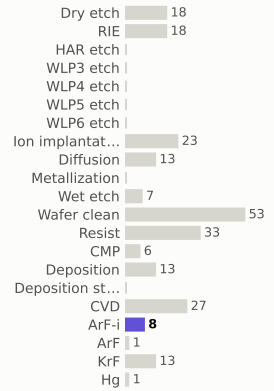

materials deposited (g)

gases emitted (g)

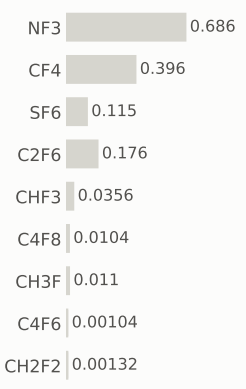

Step #3090: RIE

etch_anisotropic · RIE

1.04	154.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

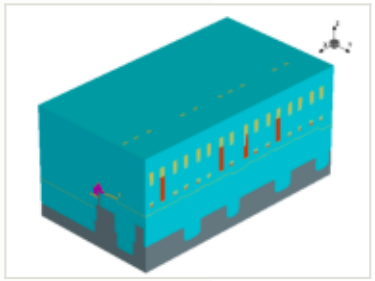

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

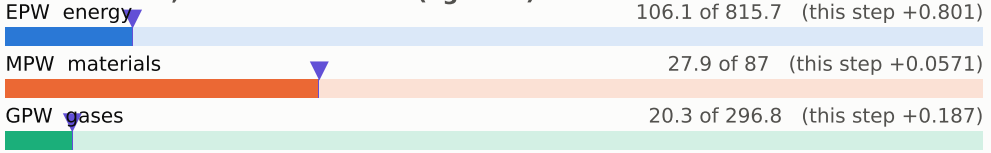

embodied carbon up to each step (kgCO2e per wafer)

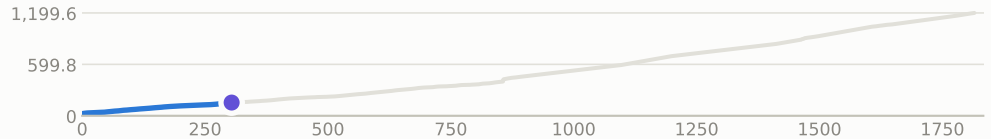

x cut at -0.570 µm

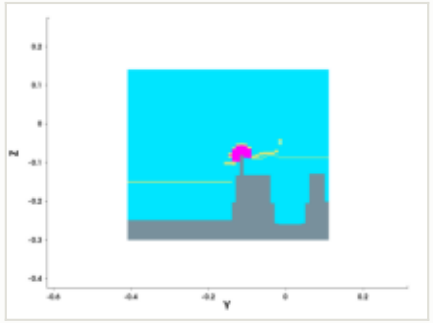

y cut at -0.150 µm

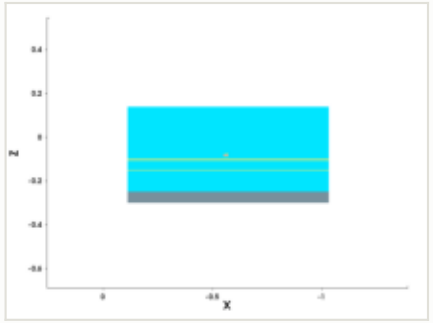

mask for this step

no mask for this step

steps by process area

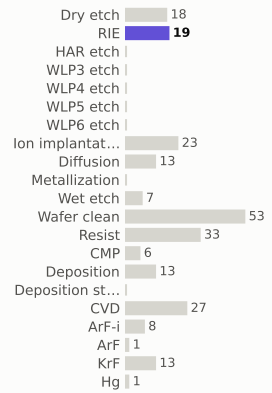

materials deposited (g)

gases emitted (g)

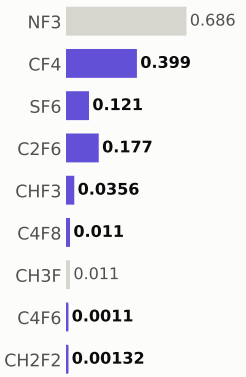

Step #3100: Spx_only

etch_anisotropic · Spx_only

0	154.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

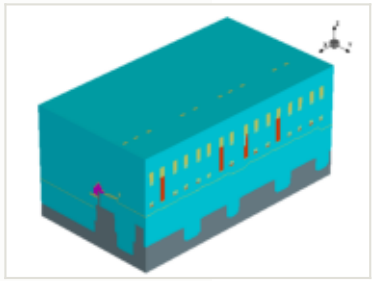

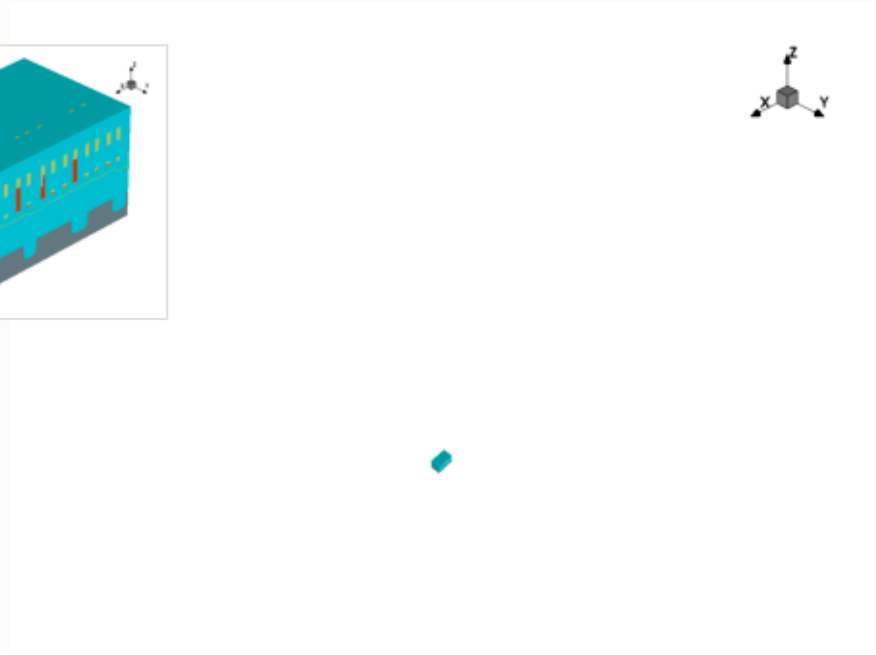

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

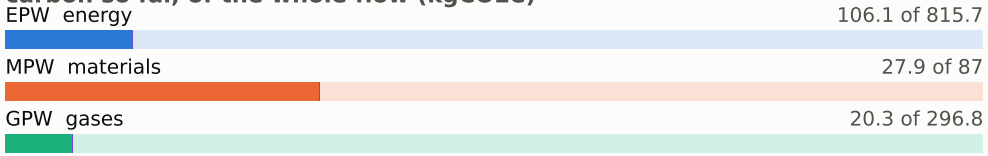

embodied carbon up to each step (kgCO2e per wafer)

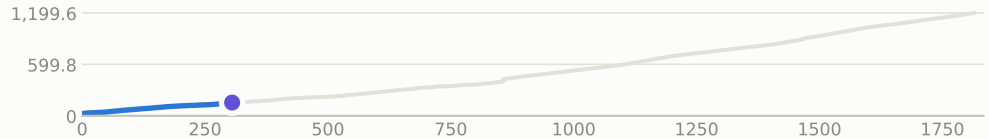

x cut at -0.570 µm

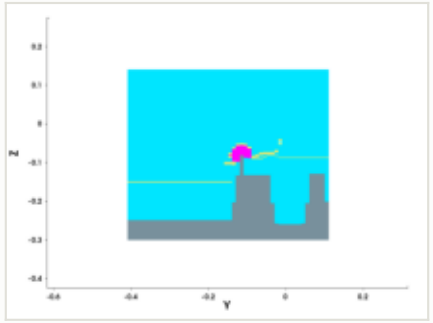

y cut at -0.150 µm

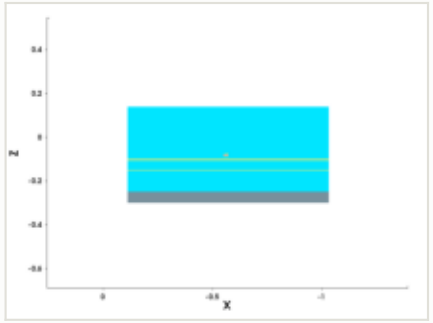

mask for this step

no mask for this step

steps by process area

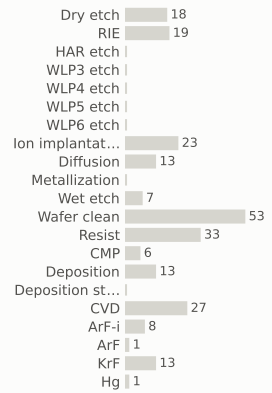

materials deposited (g)

gases emitted (g)

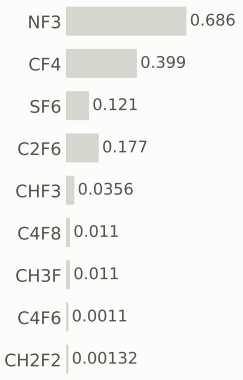

Step #3110: Spx_only

etch_anisotropic · Spx_only

0	154.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

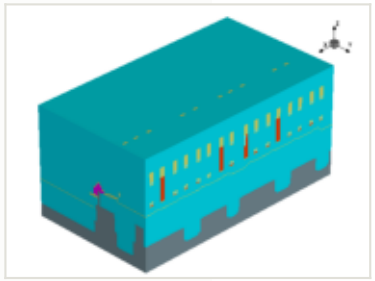

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

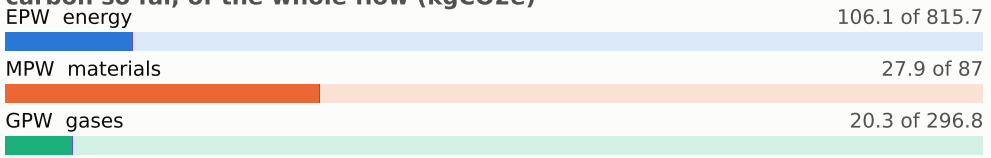

embodied carbon up to each step (kgCO2e per wafer)

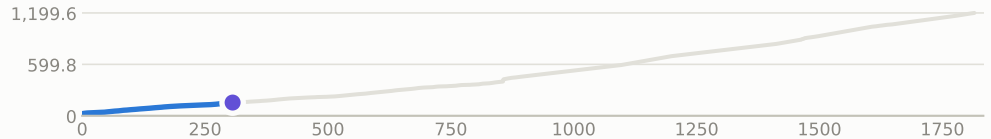

x cut at -0.570 µm

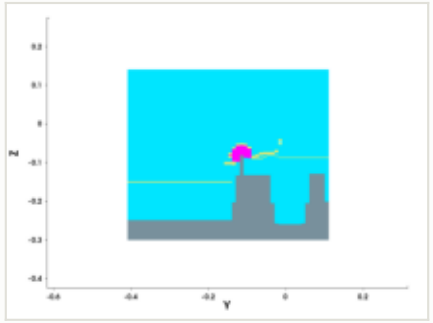

y cut at -0.150 µm

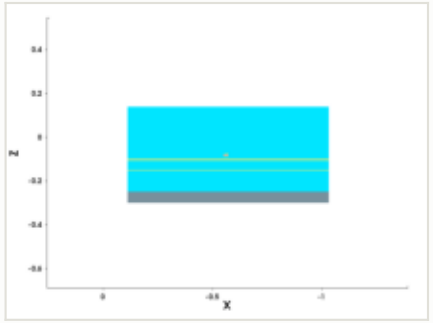

mask for this step

no mask for this step

steps by process area

materials deposited (g)

gases emitted (g)

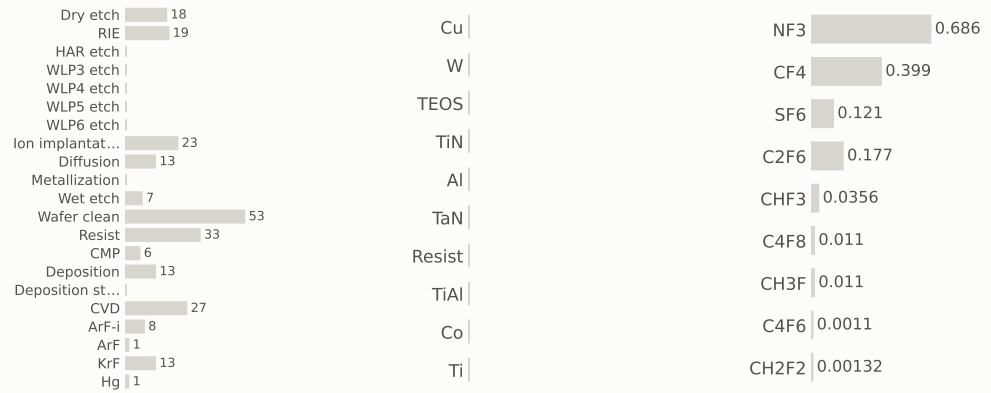

Step #3120: Spx_only

etch_strip · Spx_only

0	154.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

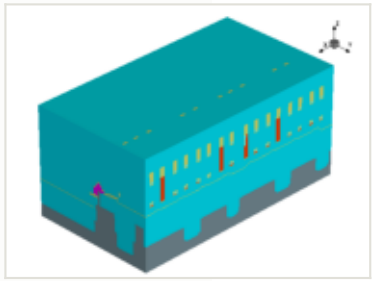

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 106.1 of 815.7

MPW materials 27.9 of 87

GPW gases 20.3 of 296.8

embodied carbon up to each step (kgCO2e per wafer)

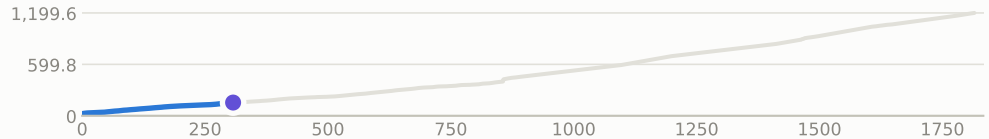

x cut at -0.570 µm

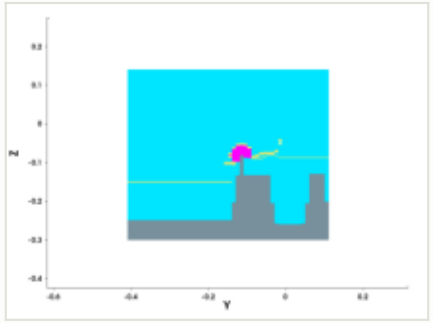

y cut at -0.150 µm

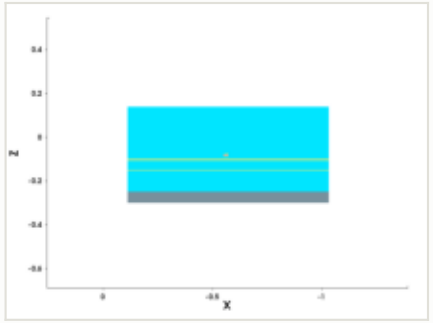

mask for this step

no mask for this step

steps by process area

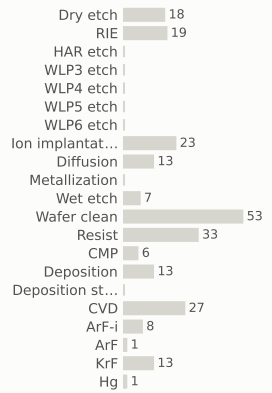

materials deposited (g)

gases emitted (g)

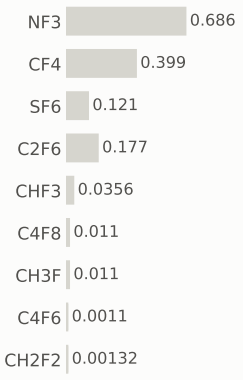

Step #3130: Wafer_clean

clean · Wafer_clean

0.169	154.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

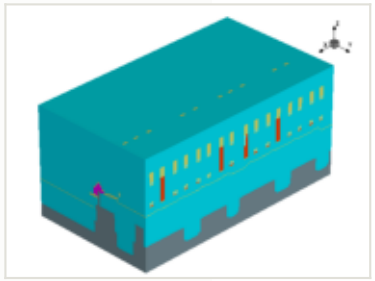

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

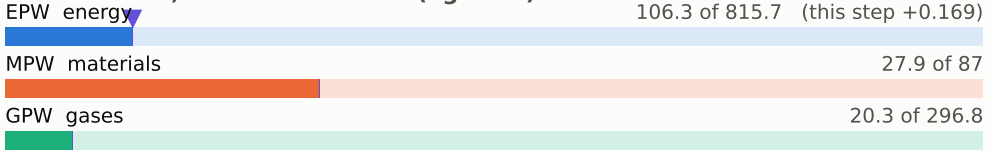

embodied carbon up to each step (kgCO2e per wafer)

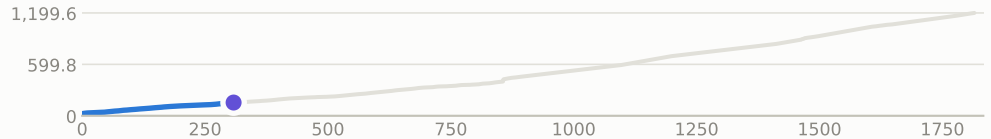

x cut at -0.570 µm

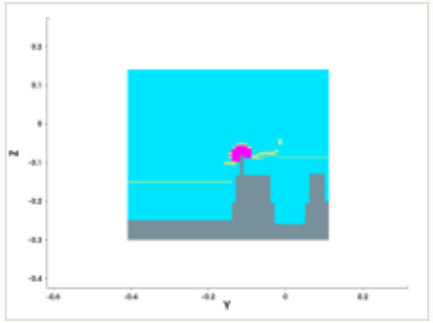

y cut at -0.150 µm

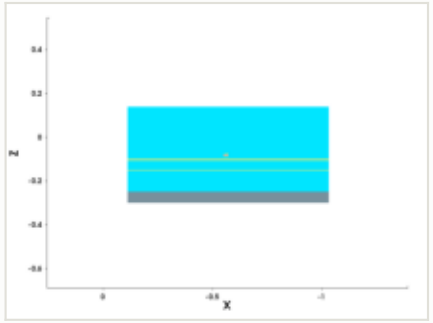

mask for this step

no mask for this step

steps by process area

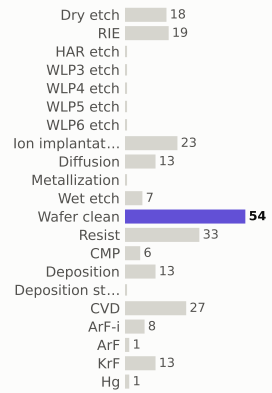

materials deposited (g)

gases emitted (g)

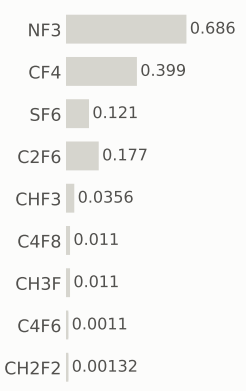

Step #3140: Resist

depo_fill · Resist

0.169	154.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

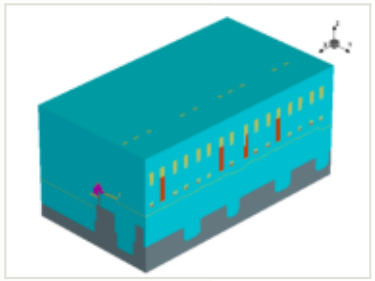

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.15 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

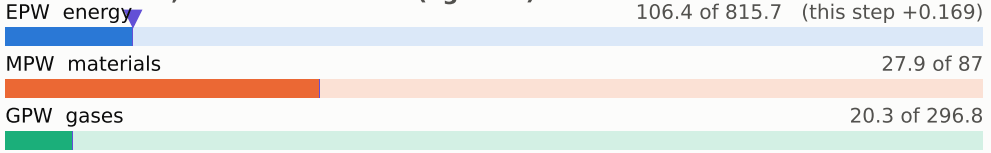

embodied carbon up to each step (kgCO2e per wafer)

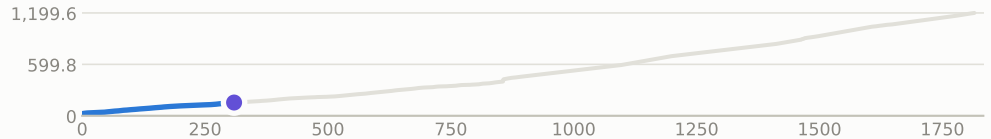

x cut at -0.570 µm

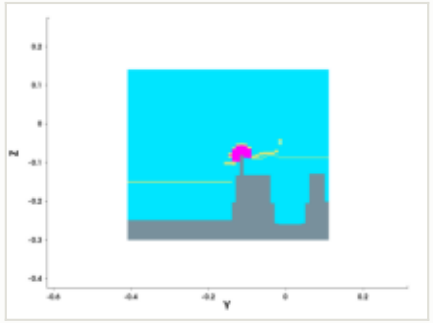

y cut at -0.150 µm

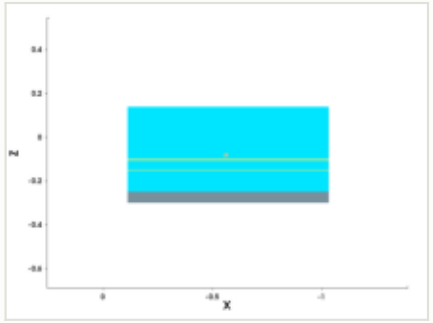

mask for this step

no mask for this step

steps by process area

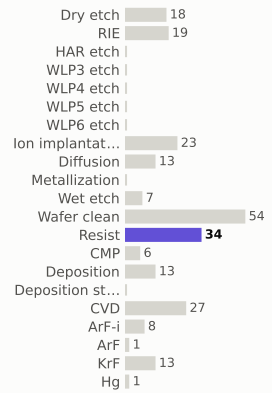

materials deposited (g)

gases emitted (g)

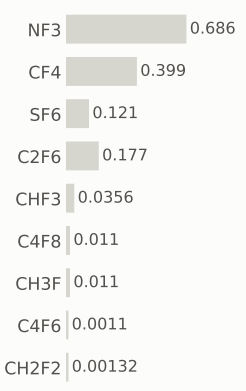

Step #3150: CVD

depo_fill · CVD

1.31	156.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

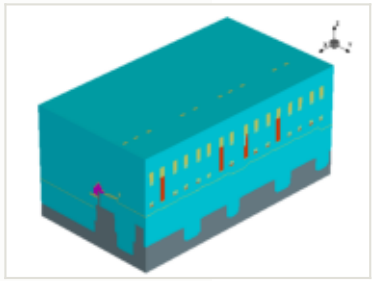

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.035 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

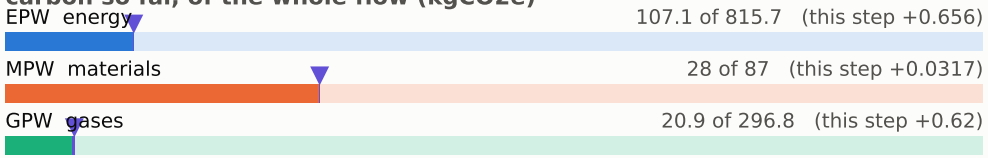

embodied carbon up to each step (kgCO2e per wafer)

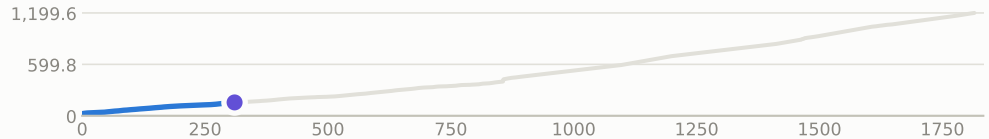

x cut at -0.570 µm

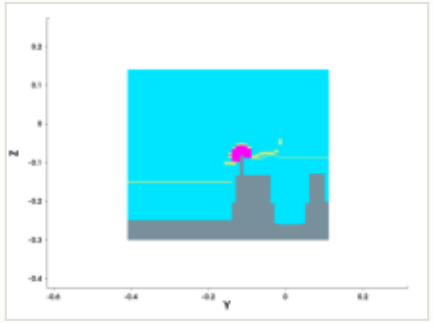

y cut at -0.150 µm

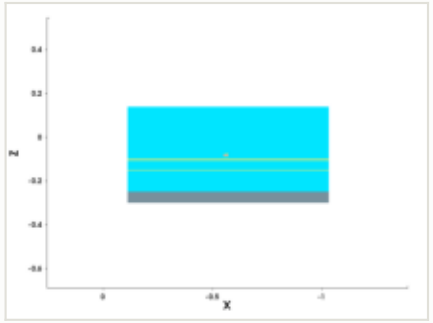

mask for this step

no mask for this step

steps by process area

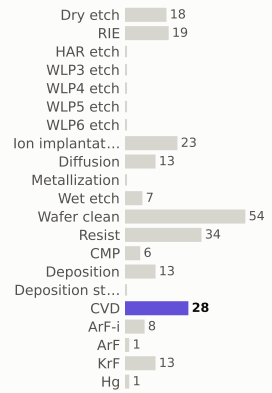

materials deposited (g)

gases emitted (g)

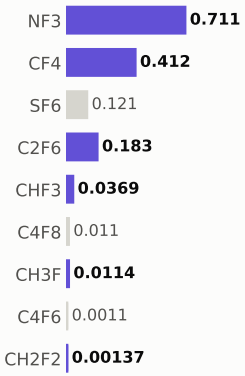

Step #3160: Wafer_clean

clean · Wafer_clean

0.169	156.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

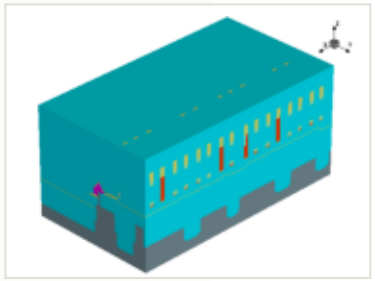

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

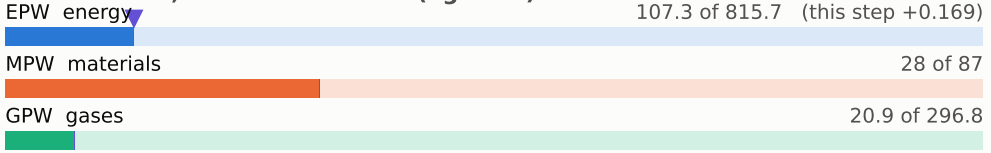

embodied carbon up to each step (kgCO2e per wafer)

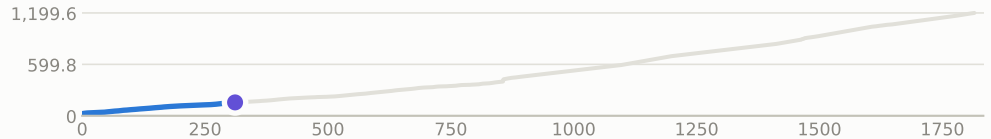

x cut at -0.570 µm

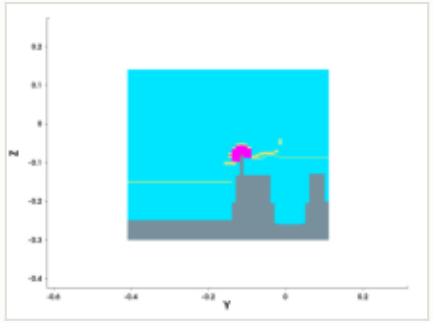

y cut at -0.150 µm

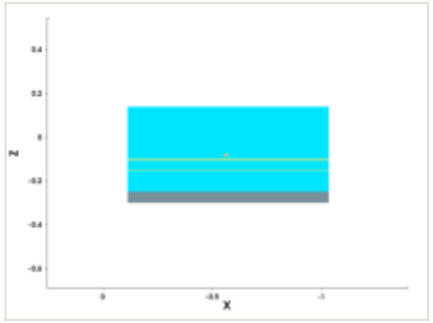

mask for this step

no mask for this step

steps by process area

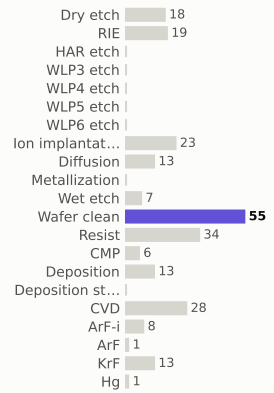

materials deposited (g)

gases emitted (g)

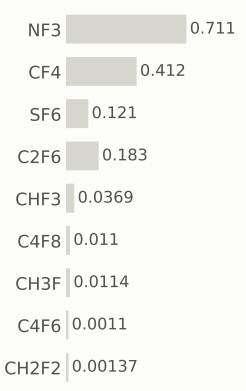

Step #3170: Resist

resist · Resist

0.169	156.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

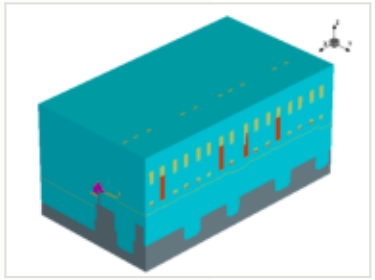

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

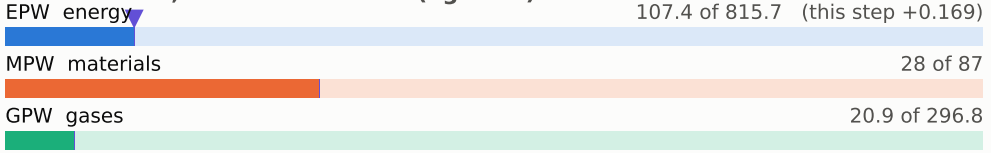

embodied carbon up to each step (kgCO2e per wafer)

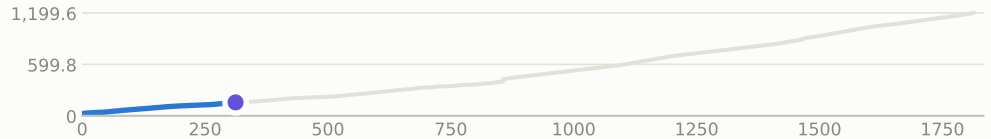

x cut at -0.570 µm

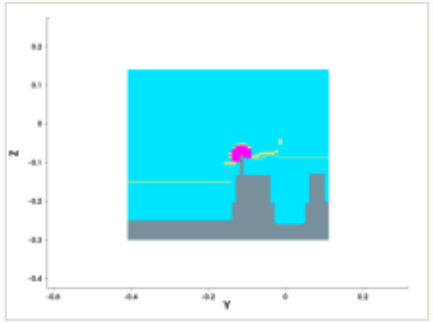

y cut at -0.150 µm

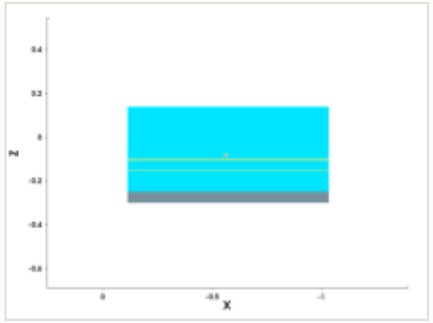

mask for this step

no mask for this step

steps by process area

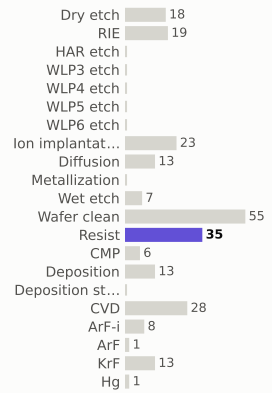

materials deposited (g)

gases emitted (g)

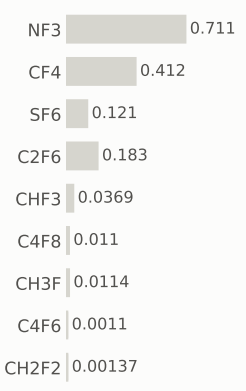

Step #3180: ArF-i

litho_patterning · ArF-i

0.217	156.5	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

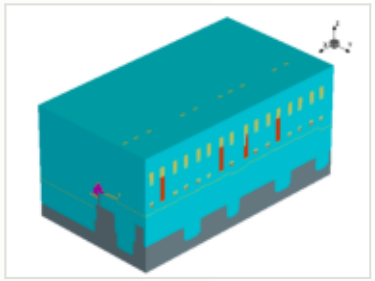

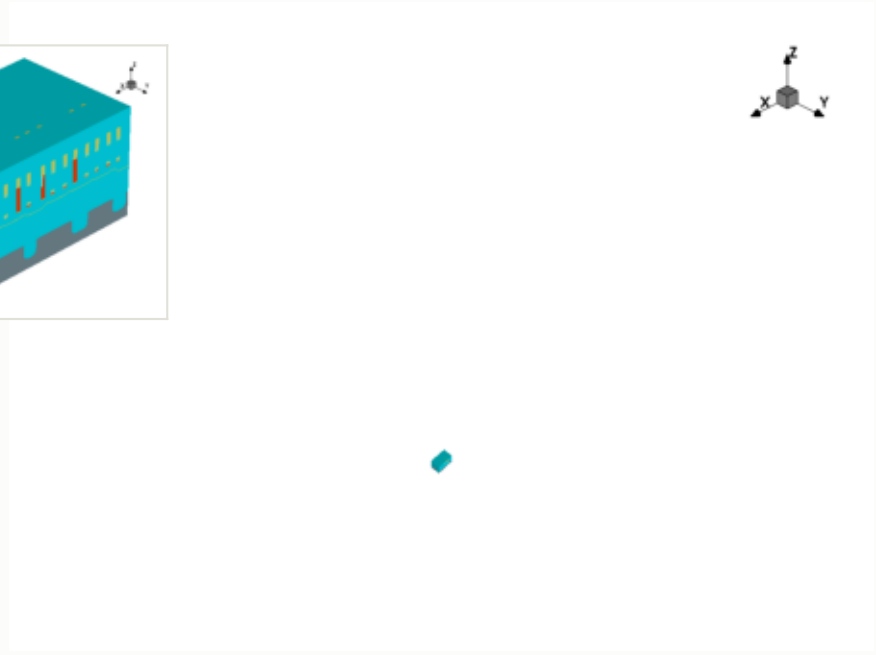

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

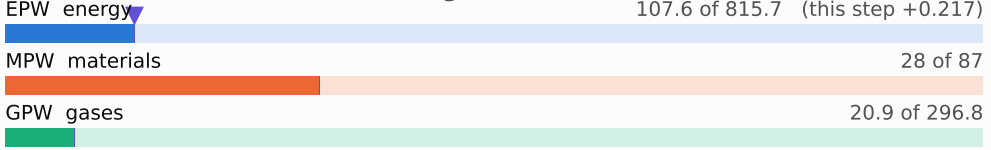

embodied carbon up to each step (kgCO2e per wafer)

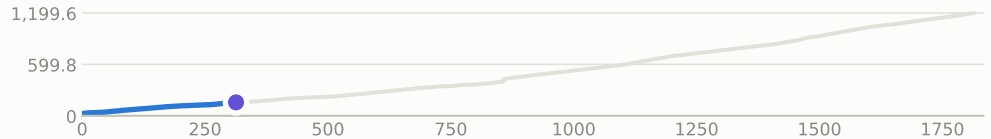

x cut at -0.570 µm

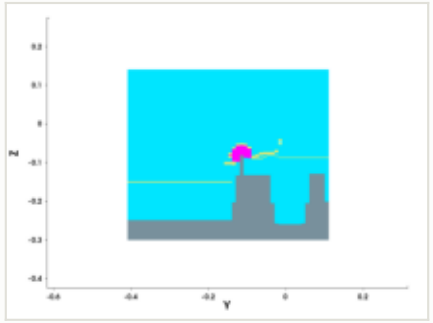

y cut at -0.150 µm

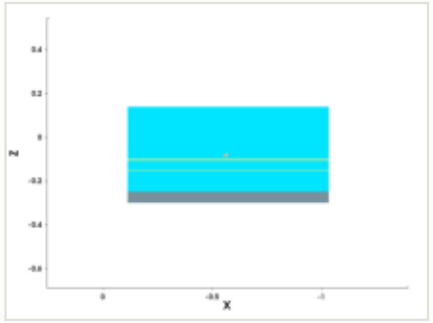

mask: layer 2088:0 (GDSII)

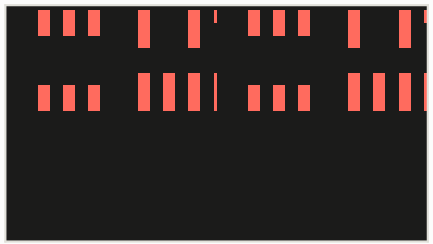

steps by process area

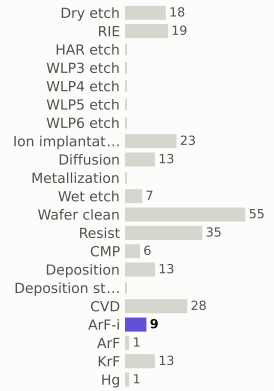

materials deposited (g)

gases emitted (g)

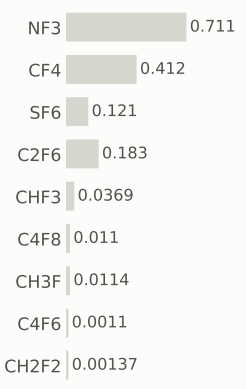

Step #3190: RIE

etch_anisotropic · RIE

1.04	157.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

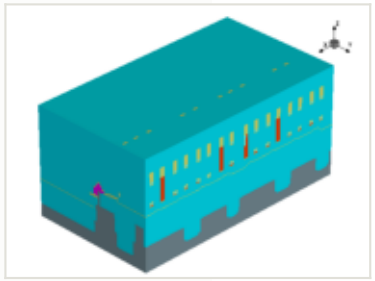

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

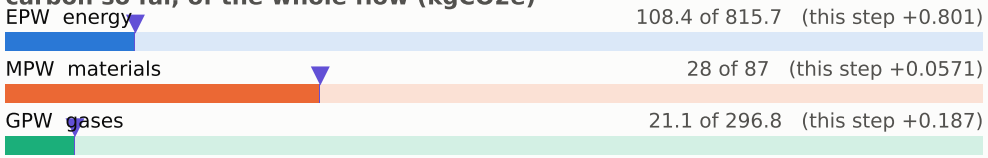

embodied carbon up to each step (kgCO2e per wafer)

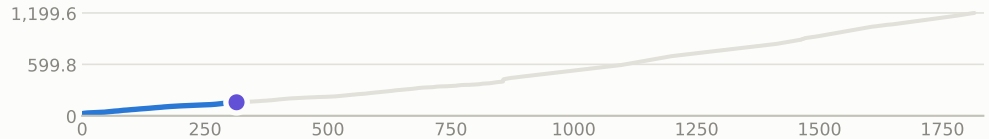

x cut at -0.570 µm

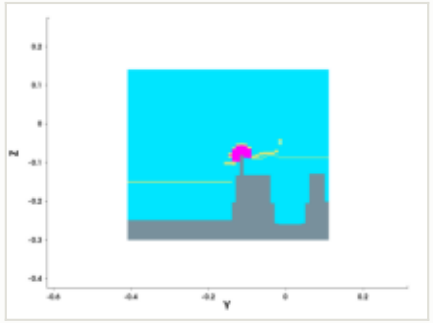

y cut at -0.150 µm

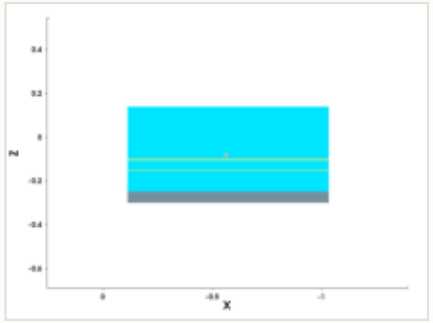

mask for this step

no mask for this step

steps by process area

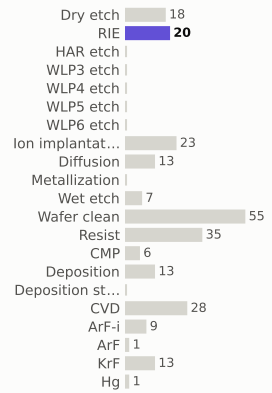

materials deposited (g)

gases emitted (g)

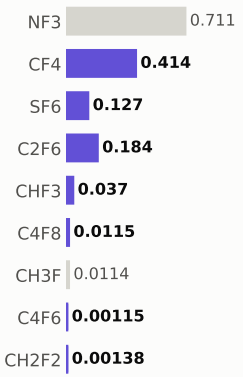

Step #3200: Spx_only

etch_anisotropic · Spx_only

0	157.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

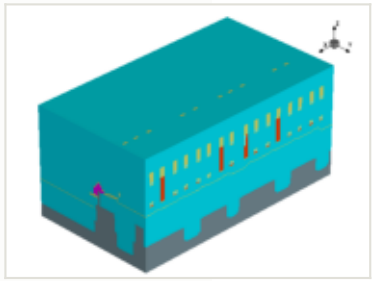

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 108.4 of 815.7

MPW materials 28 of 87

GPW gases 21.1 of 296.8

embodied carbon up to each step (kgCO2e per wafer)

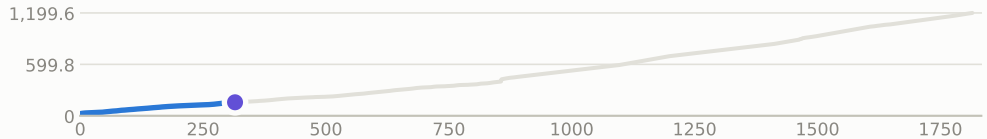

x cut at -0.570 µm

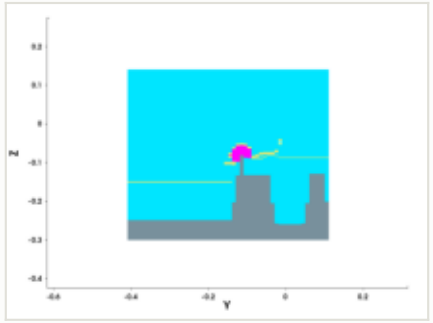

y cut at -0.150 µm

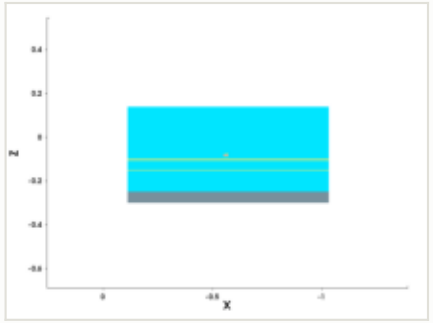

mask for this step

no mask for this step

steps by process area

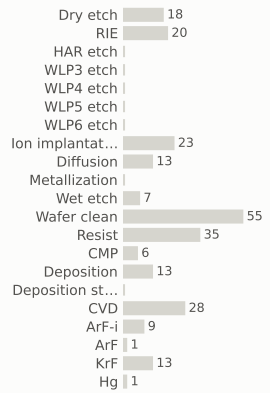

materials deposited (g)

gases emitted (g)

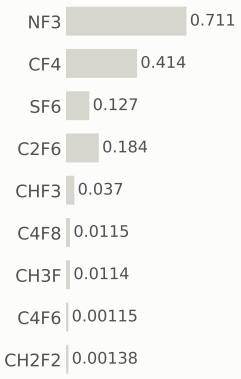

Step #3210: Spx_only

etch_anisotropic · Spx_only

0	157.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

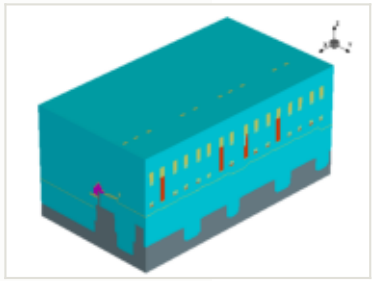

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

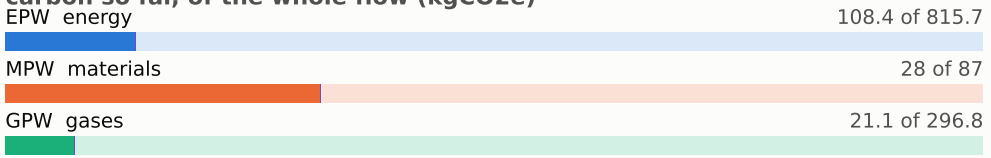

embodied carbon up to each step (kgCO2e per wafer)

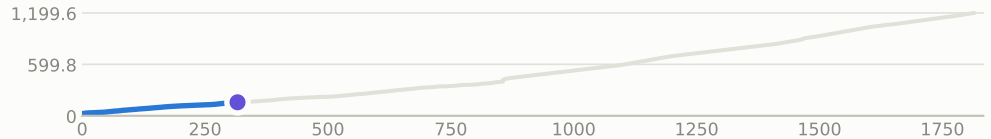

x cut at -0.570 µm

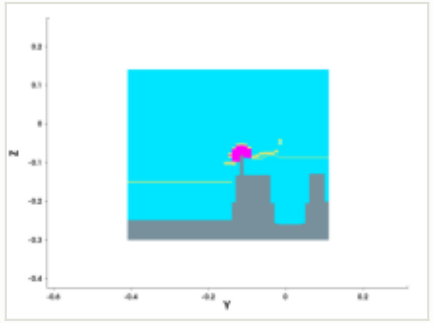

y cut at -0.150 µm

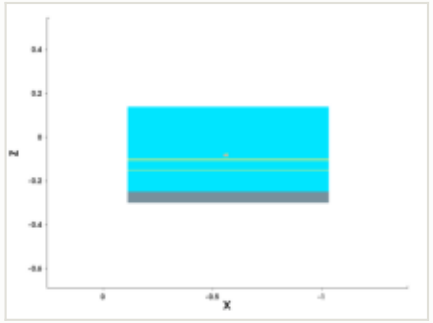

mask for this step

no mask for this step

steps by process area

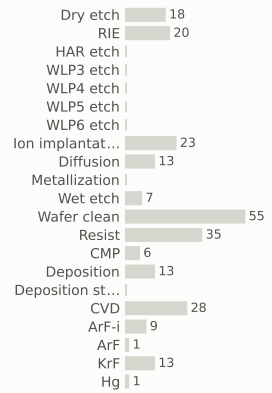

materials deposited (g)

gases emitted (g)

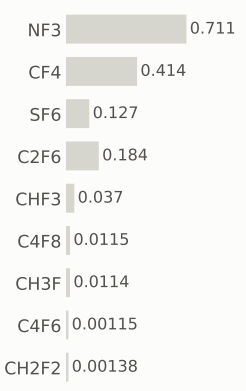

Step #3220: Spx_only

etch_strip · Spx_only

0	157.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

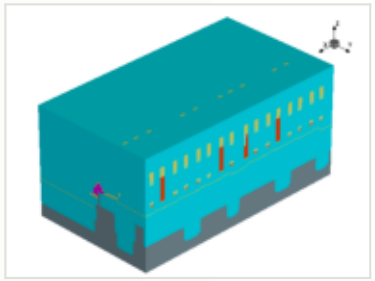

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

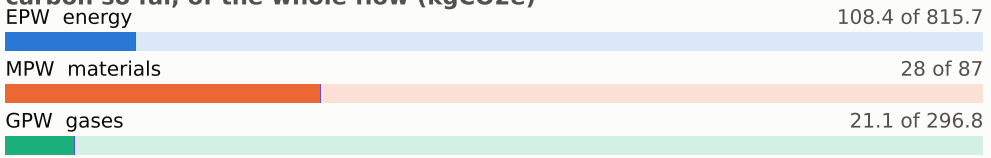

embodied carbon up to each step (kgCO2e per wafer)

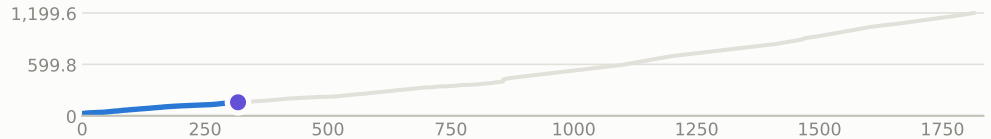

x cut at -0.570 µm

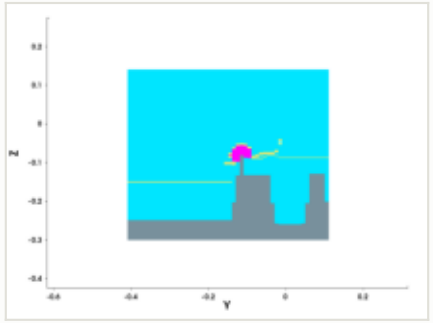

y cut at -0.150 µm

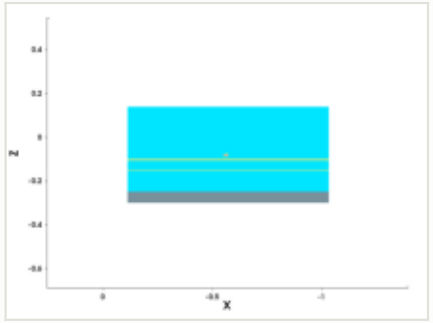

mask for this step

no mask for this step

steps by process area

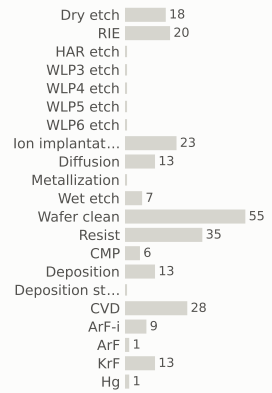

materials deposited (g)

gases emitted (g)

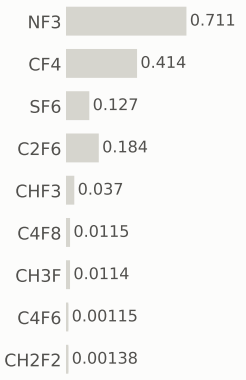

Step #3230: Spx_only

etch_anisotropic · Spx_only

0	157.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

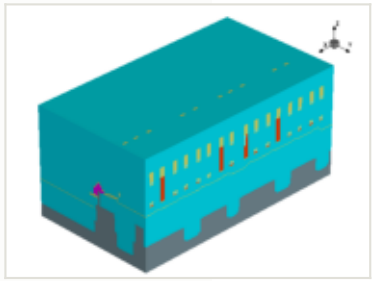

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

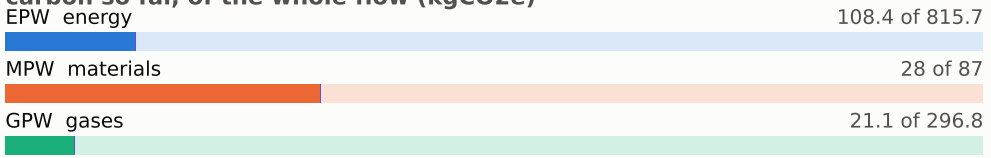

embodied carbon up to each step (kgCO2e per wafer)

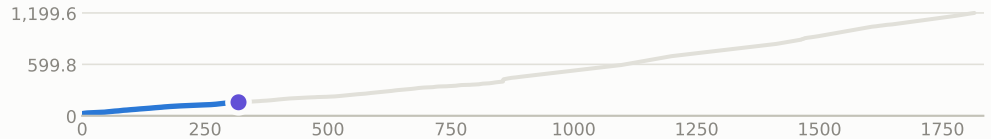

x cut at -0.570 µm

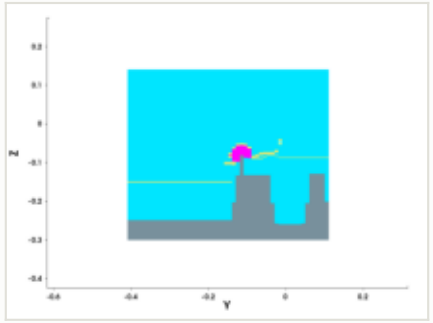

y cut at -0.150 µm

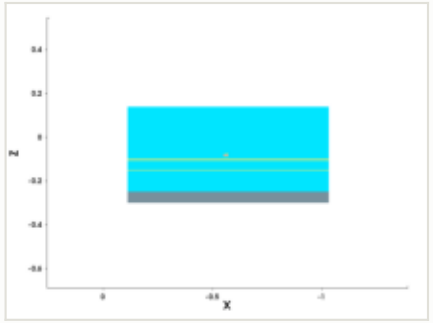

mask for this step

no mask for this step

steps by process area

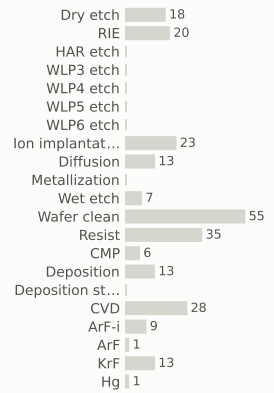

materials deposited (g)

gases emitted (g)

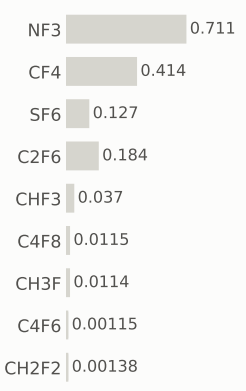

Step #3240: Spx_only

etch_anisotropic · Spx_only

0	157.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

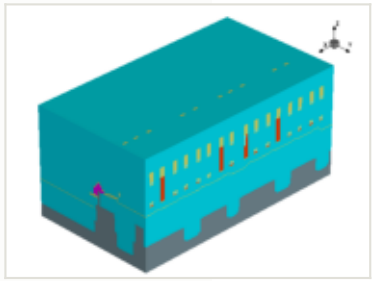

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

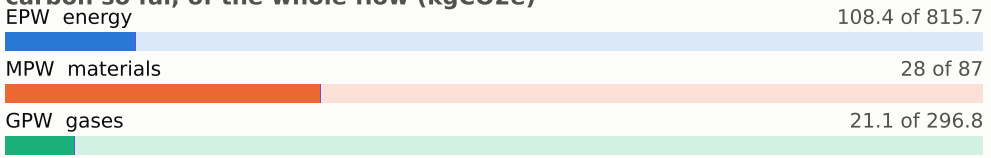

embodied carbon up to each step (kgCO2e per wafer)

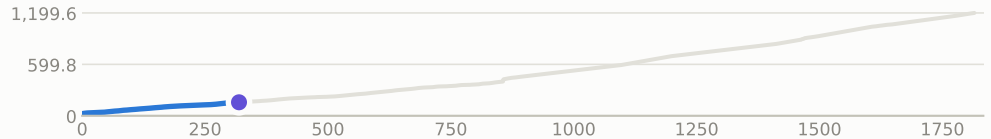

x cut at -0.570 µm

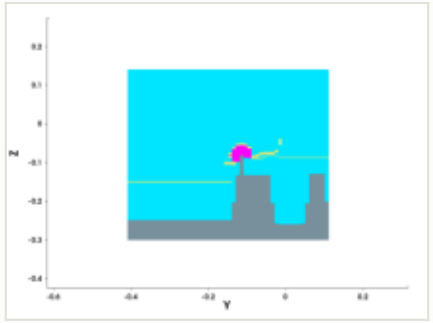

y cut at -0.150 µm

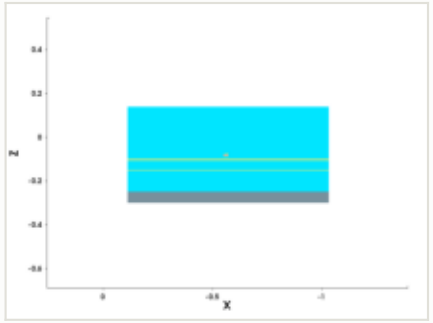

mask for this step

no mask for this step

steps by process area

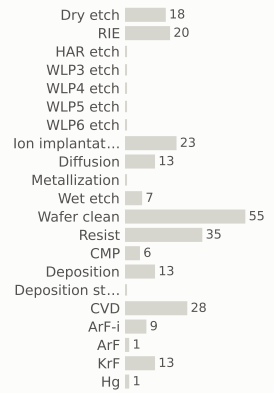

materials deposited (g)

gases emitted (g)

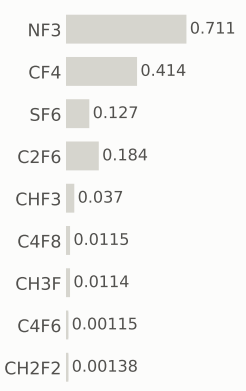

Step #3250: Spx_only

etch_anisotropic · Spx_only

0	157.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

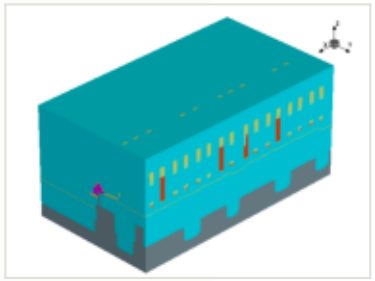

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

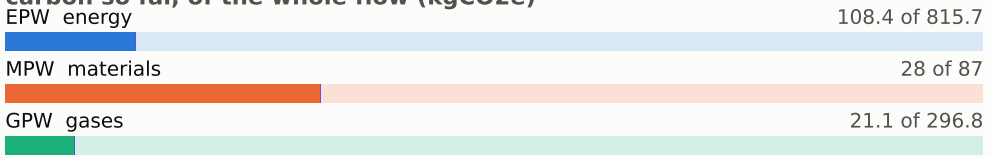

embodied carbon up to each step (kgCO2e per wafer)

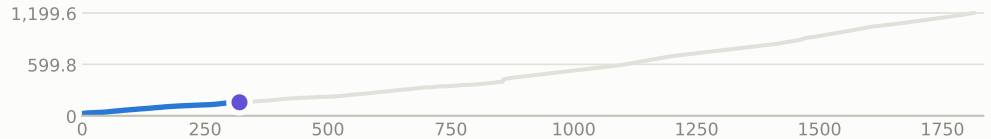

x cut at -0.570 µm

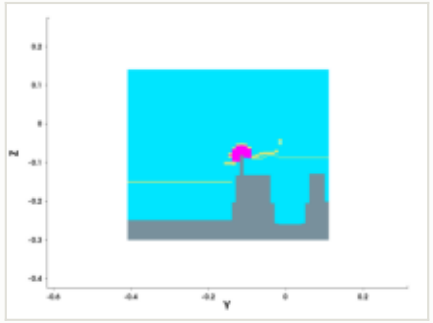

y cut at -0.150 µm

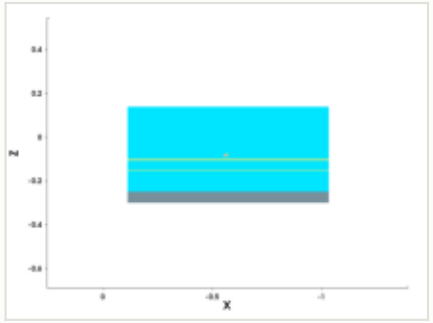

mask for this step

no mask for this step

steps by process area

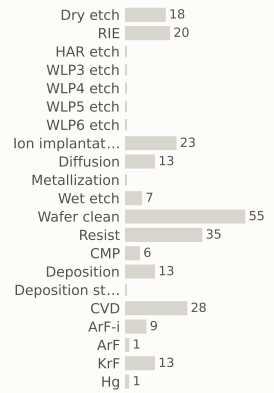

materials deposited (g)

gases emitted (g)

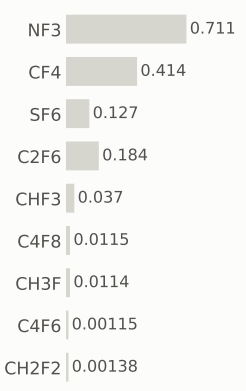

Step #3260: Spx_only

etch_microloading · Spx_only

0	157.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

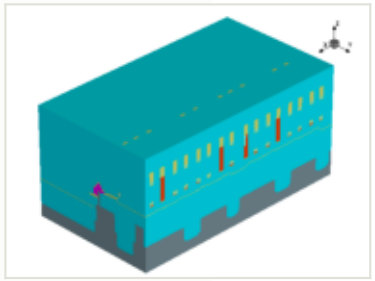

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

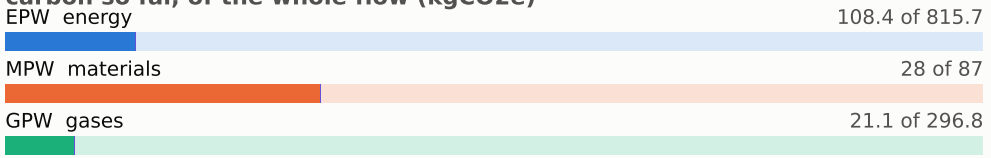

embodied carbon up to each step (kgCO2e per wafer)

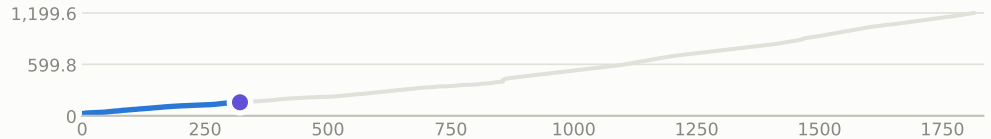

x cut at -0.570 µm

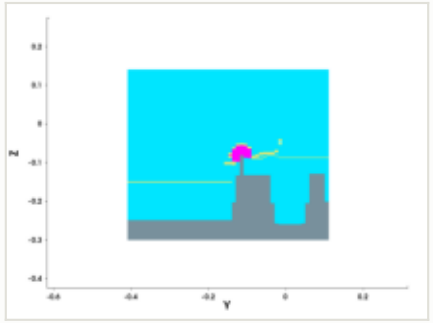

y cut at -0.150 µm

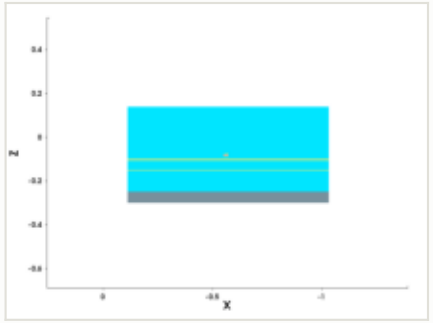

mask for this step

no mask for this step

steps by process area

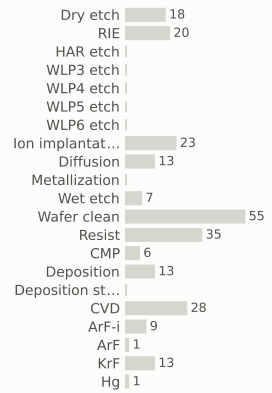

materials deposited (g)

gases emitted (g)

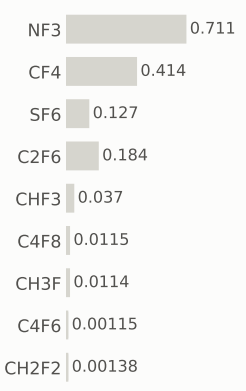

Step #3270: Spx_only

etch_ellipsoidal · Spx_only

0	157.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

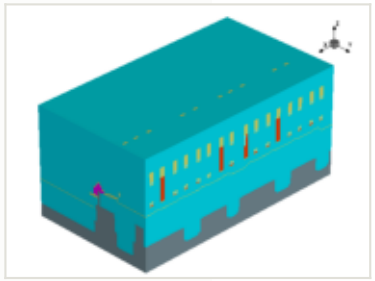

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

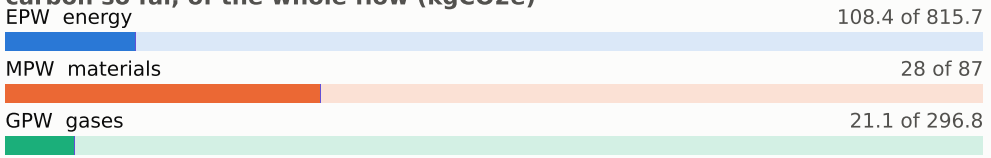

embodied carbon up to each step (kgCO2e per wafer)

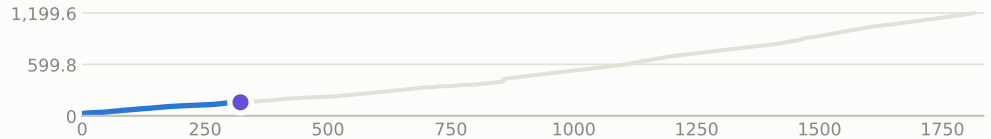

x cut at -0.570 µm

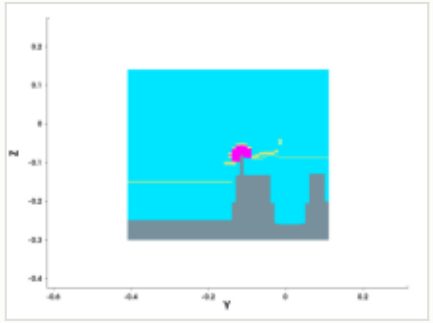

y cut at -0.150 µm

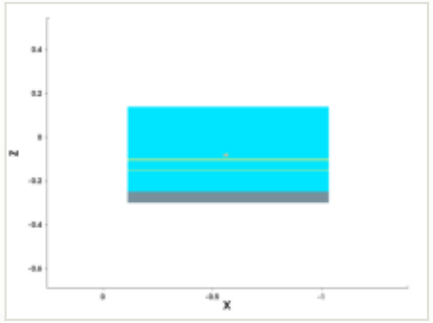

mask for this step

no mask for this step

steps by process area

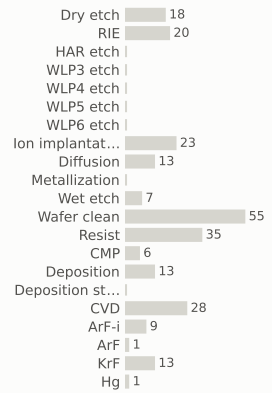

materials deposited (g)

gases emitted (g)

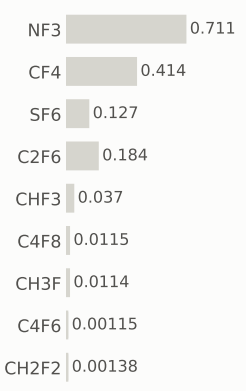

Step #3280: Wafer_clean

clean · Wafer_clean

0.169	157.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

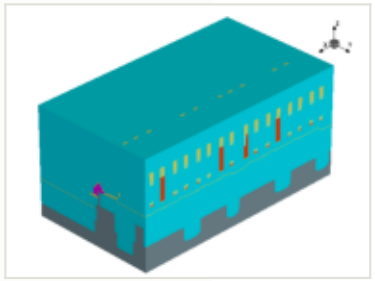

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

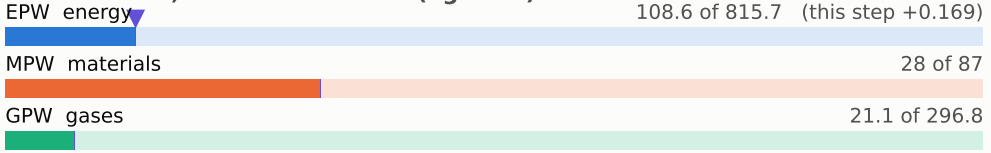

embodied carbon up to each step (kgCO2e per wafer)

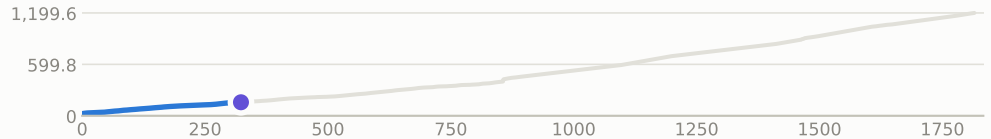

x cut at -0.570 µm

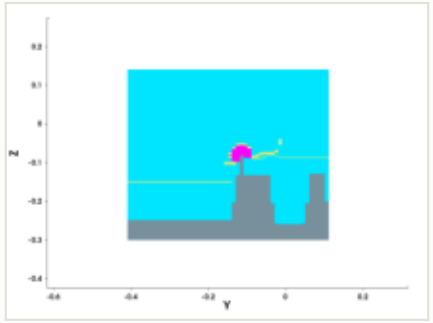

y cut at -0.150 µm

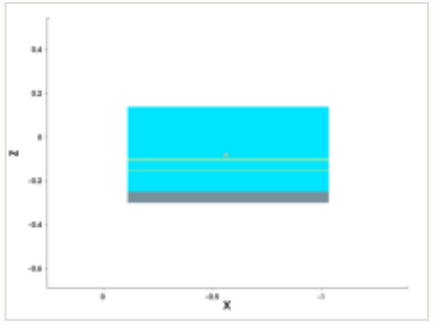

mask for this step

no mask for this step

steps by process area

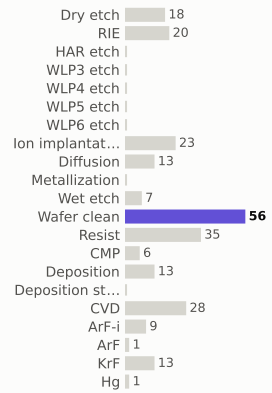

materials deposited (g)

gases emitted (g)

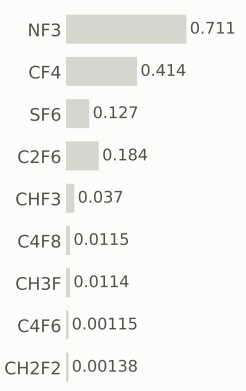

Step #3290: RIE

etch_ellipsoidal · RIE

1.04	158.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

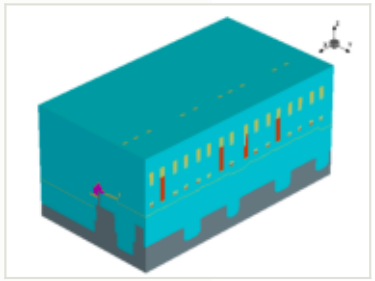

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 109.4 of 815.7 (this step +0.801)

MPW materials — 28.1 of 87 (this step +0.0571)

GPW gases — 21.3 of 296.8 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)

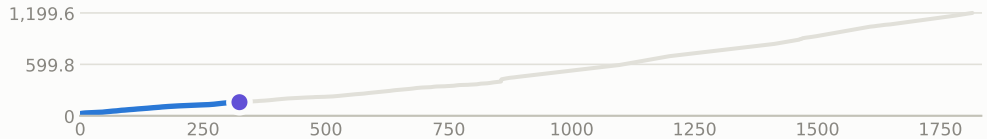

x cut at -0.570 µm

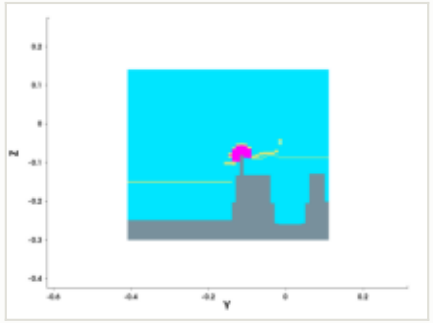

y cut at -0.150 µm

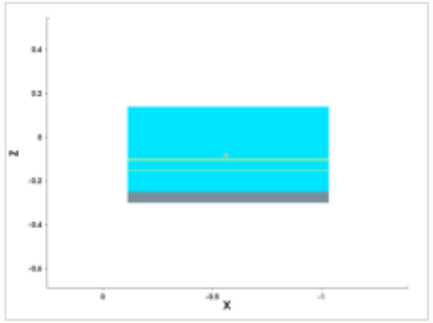

mask for this step

no mask for this step

steps by process area

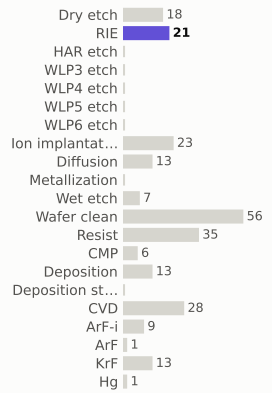

materials deposited (g)

gases emitted (g)

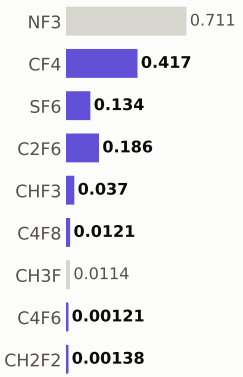

Step #3300: Spx_only

etch_isotropic · Spx_only

0	158.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

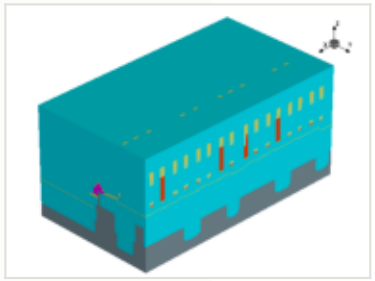

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

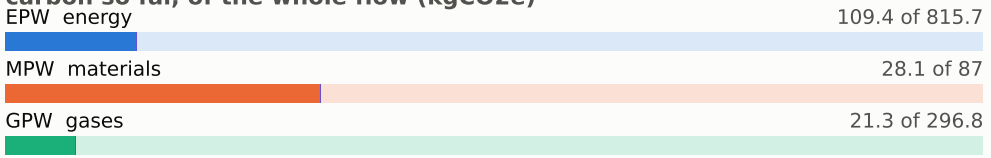

embodied carbon up to each step (kgCO2e per wafer)

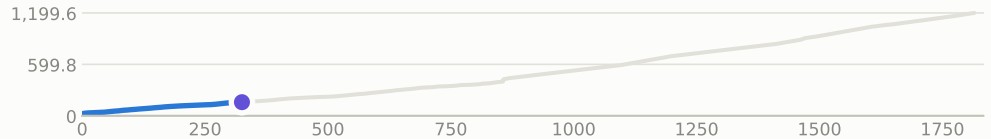

x cut at -0.570 µm

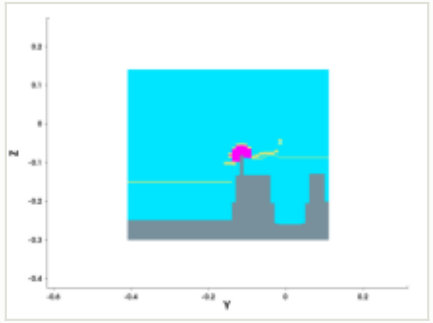

y cut at -0.150 µm

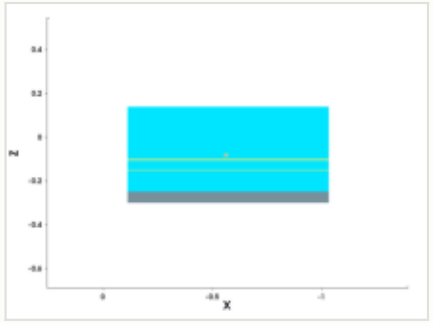

mask for this step

no mask for this step

steps by process area

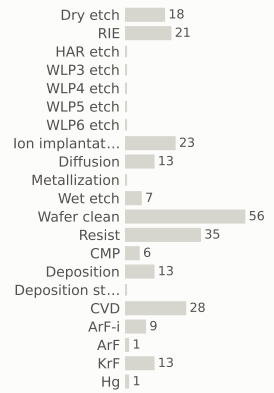

materials deposited (g)

gases emitted (g)

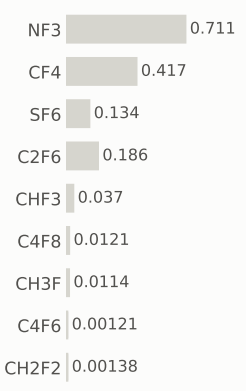

Step #3310: Spx_only

etch_strip · Spx_only

0	158.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

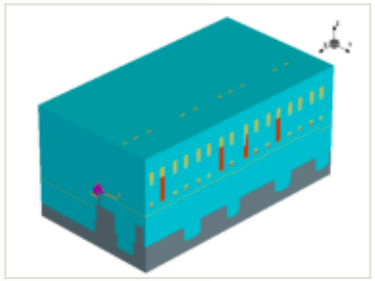

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

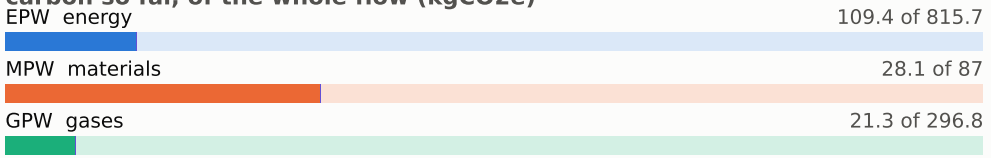

embodied carbon up to each step (kgCO2e per wafer)

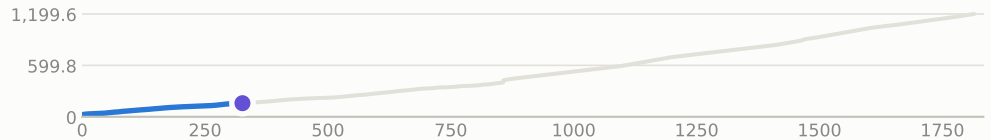

x cut at -0.570 µm

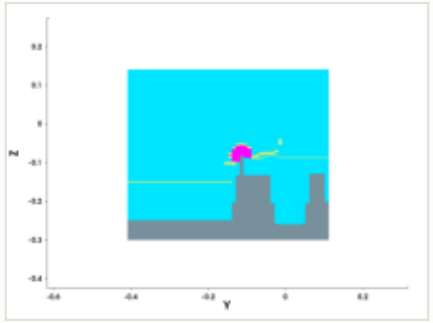

y cut at -0.150 µm

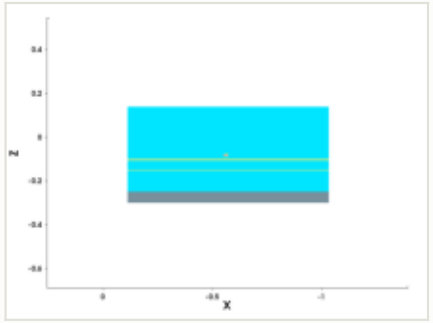

mask for this step

no mask for this step

steps by process area

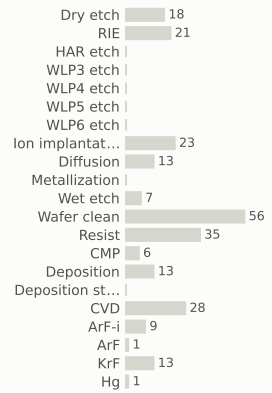

materials deposited (g)

gases emitted (g)

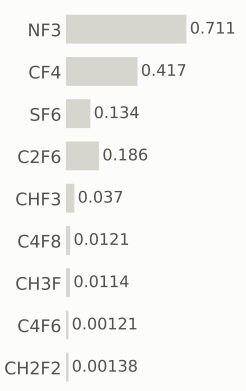

Step #3320: Wafer_clean

clean · Wafer_clean

0.169	159.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

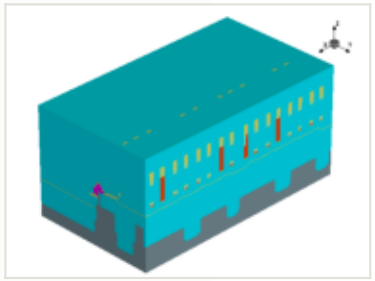

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

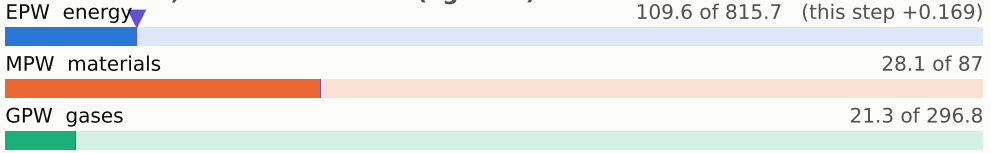

embodied carbon up to each step (kgCO2e per wafer)

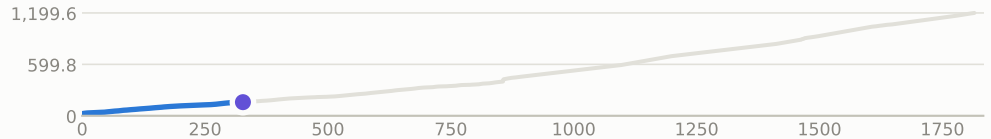

x cut at -0.570 µm

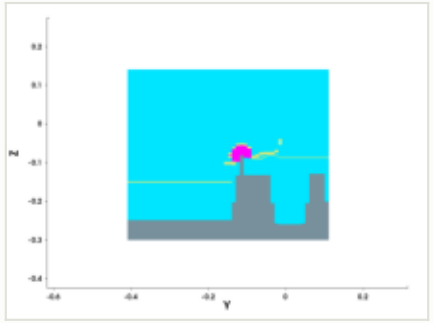

y cut at -0.150 µm

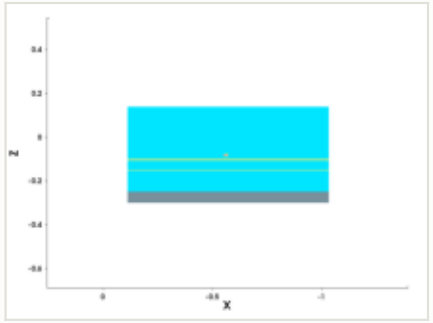

mask for this step

no mask for this step

steps by process area

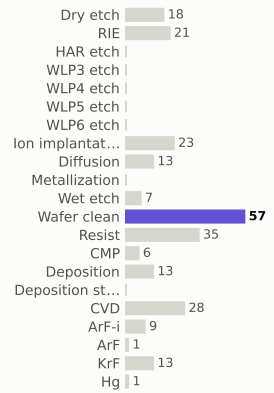

materials deposited (g)

gases emitted (g)

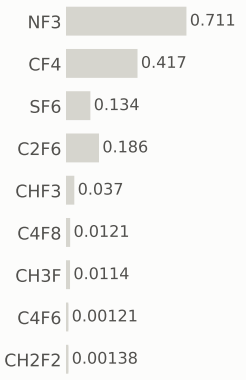

Step #3330: Dry_etch

etch_isotropic · Dry_etch

0.801	159.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

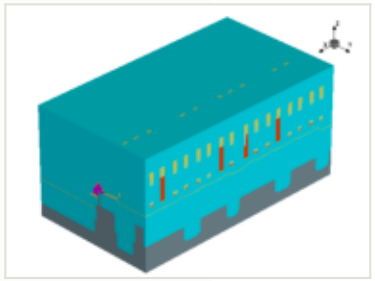

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

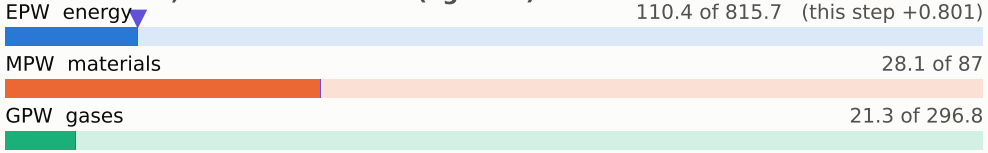

embodied carbon up to each step (kgCO2e per wafer)

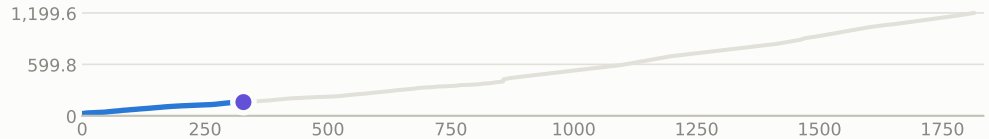

x cut at -0.570 µm

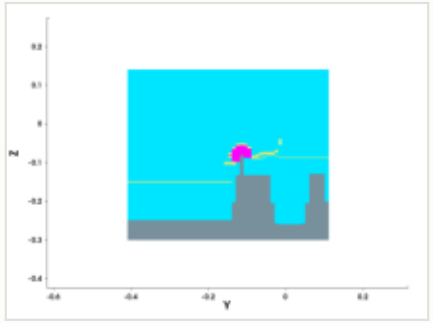

y cut at -0.150 µm

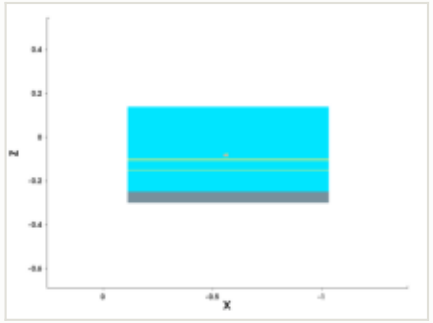

mask for this step

no mask for this step

steps by process area

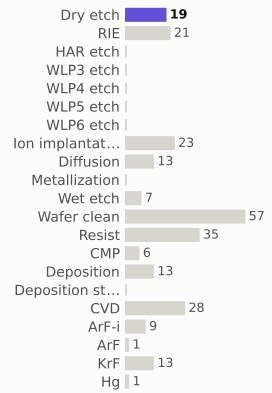

materials deposited (g)

gases emitted (g)

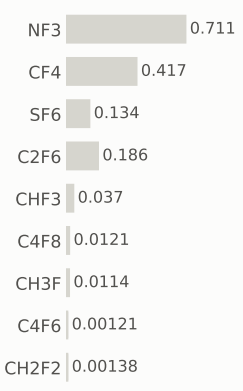

Step #3340: RIE

etch_anisotropic · RIE

1.04	160.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

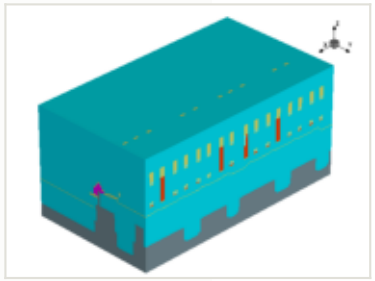

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

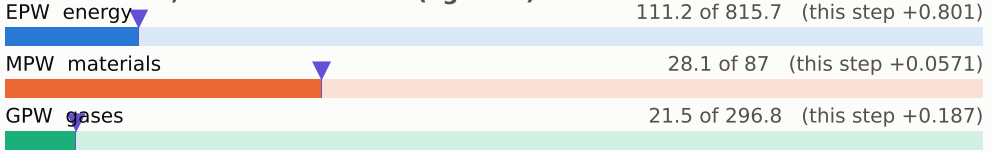

embodied carbon up to each step (kgCO2e per wafer)

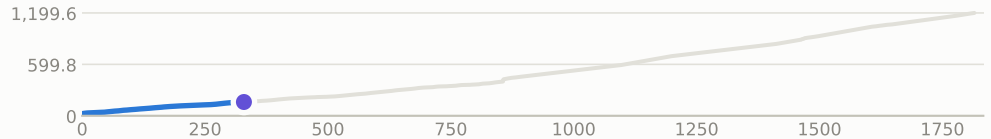

x cut at -0.570 µm

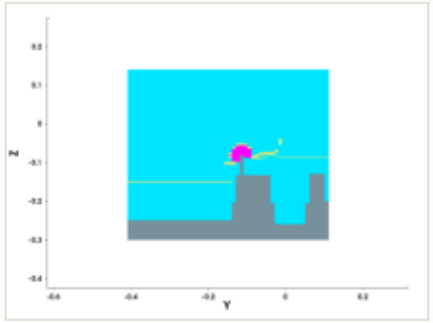

y cut at -0.150 µm

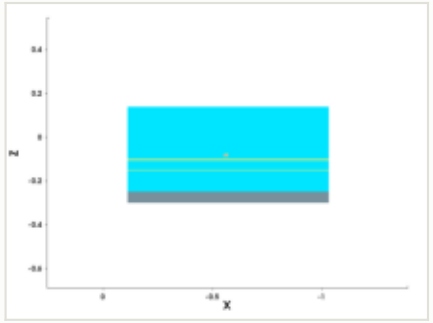

mask for this step

no mask for this step

steps by process area

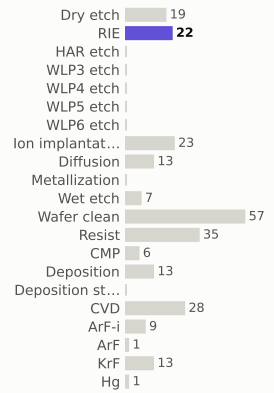

materials deposited (g)

gases emitted (g)

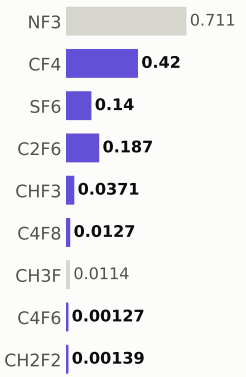

Step #3350: Spx_only

etch_microloading · Spx_only

0	160.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

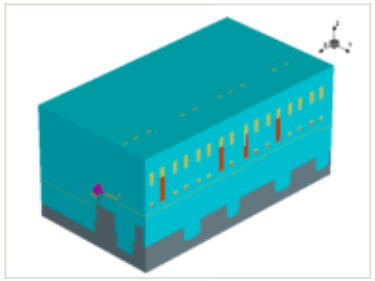

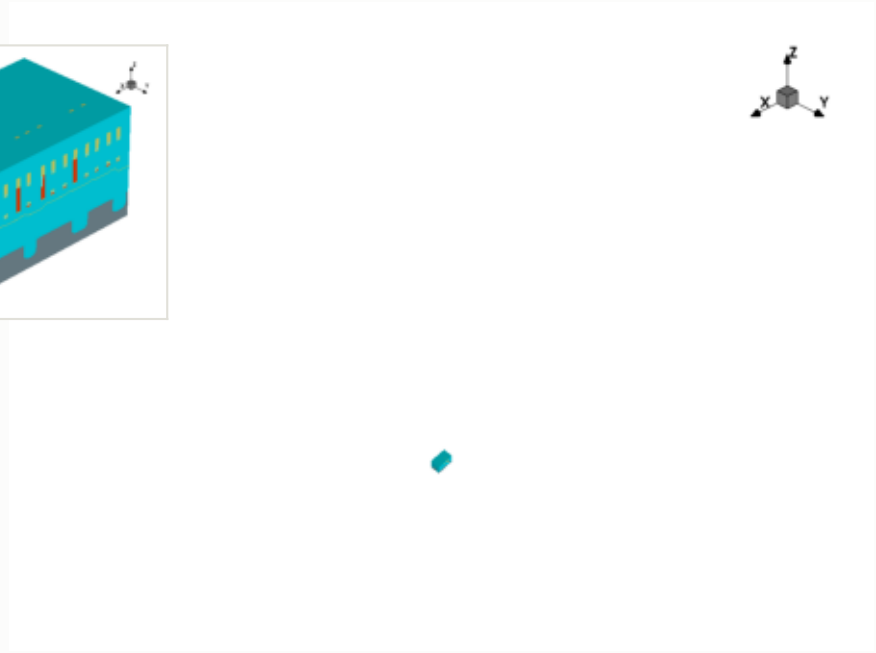

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

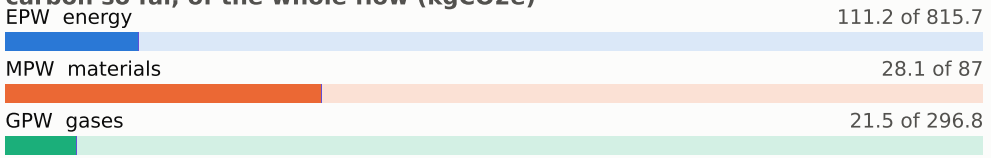

embodied carbon up to each step (kgCO2e per wafer)

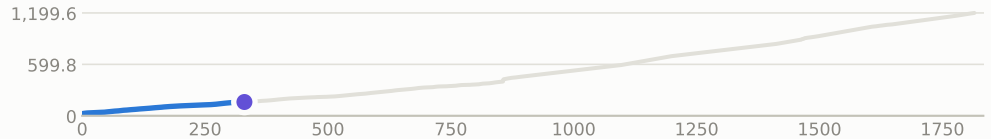

x cut at -0.570 µm

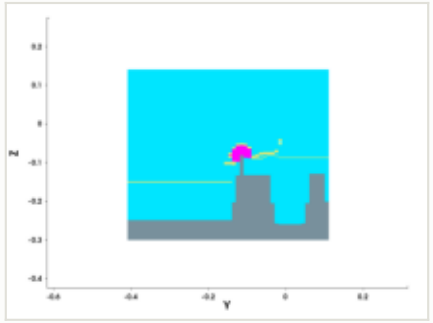

y cut at -0.150 µm

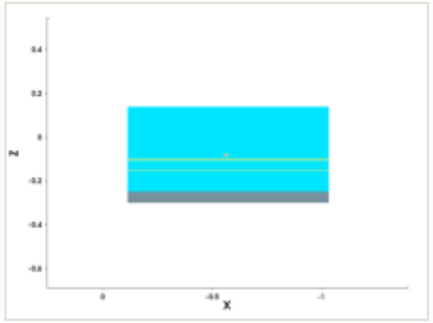

mask for this step

no mask for this step

steps by process area

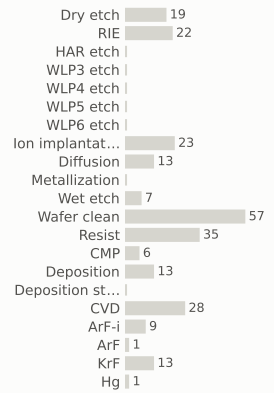

materials deposited (g)

gases emitted (g)

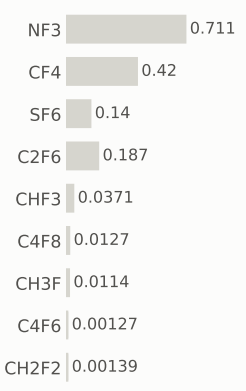

Step #3360: Spx_only

depo_isotropic · Spx_only

0	160.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

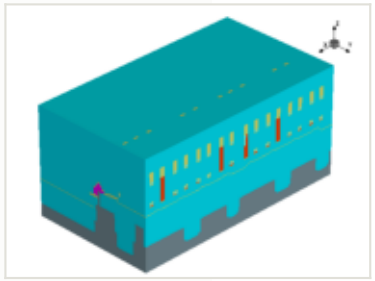

this step

process area	Spx_only
material	—
thickness	0.001 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

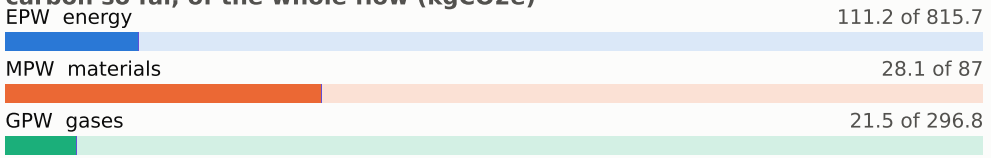

embodied carbon up to each step (kgCO2e per wafer)

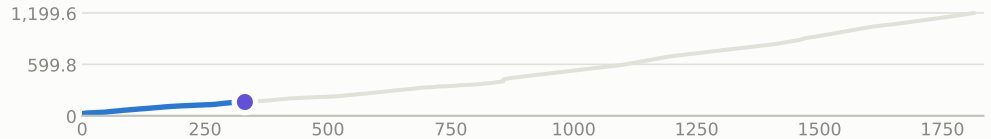

x cut at -0.570 µm

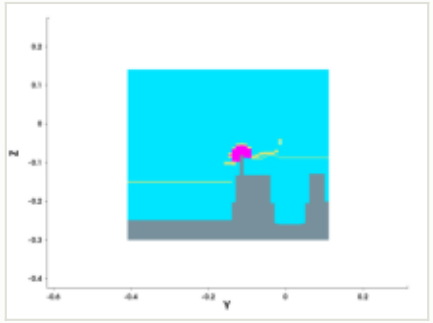

y cut at -0.150 µm

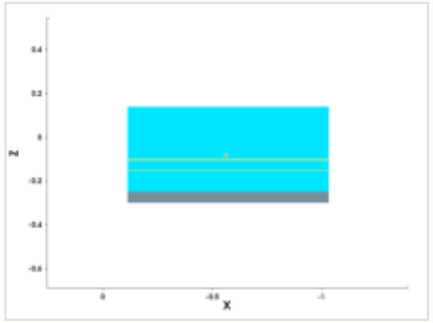

mask for this step

no mask for this step

steps by process area

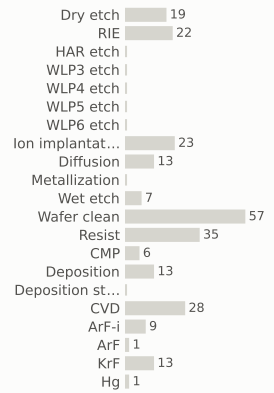

materials deposited (g)

gases emitted (g)

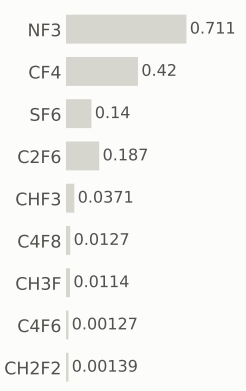

Step #3370: Wafer_clean

clean · Wafer_clean

0.169	161.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

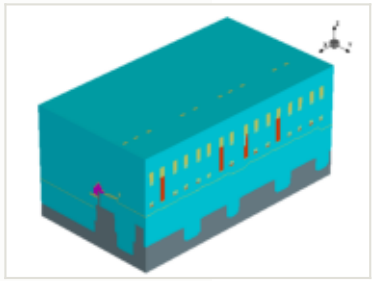

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

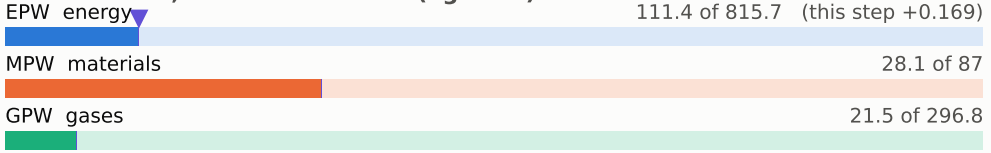

embodied carbon up to each step (kgCO2e per wafer)

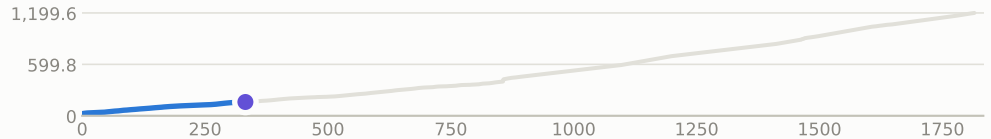

x cut at -0.570 µm

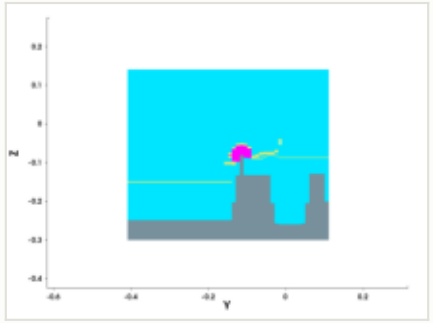

y cut at -0.150 µm

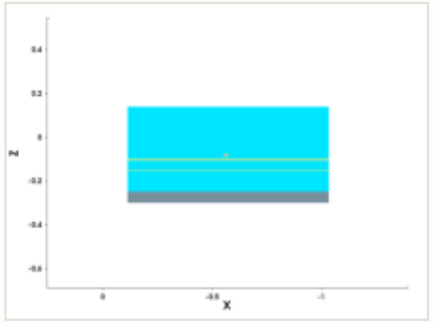

mask for this step

no mask for this step

steps by process area

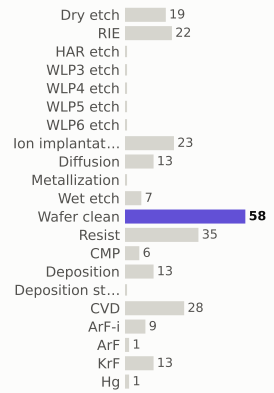

materials deposited (g)

gases emitted (g)

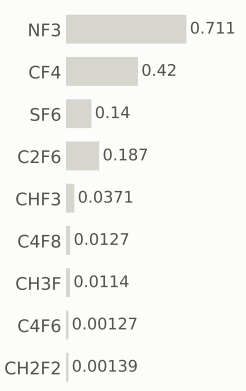

Step #3380: Wafer_clean

clean · Wafer_clean

0.169	161.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

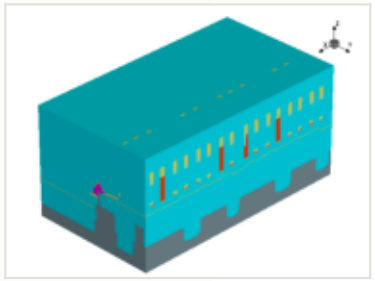

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

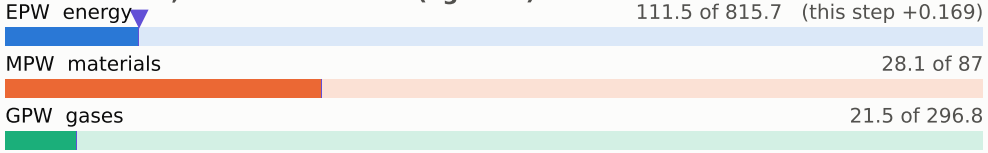

embodied carbon up to each step (kgCO2e per wafer)

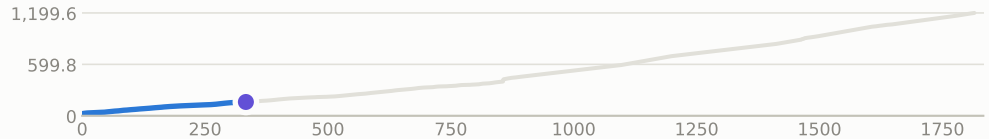

x cut at -0.570 µm

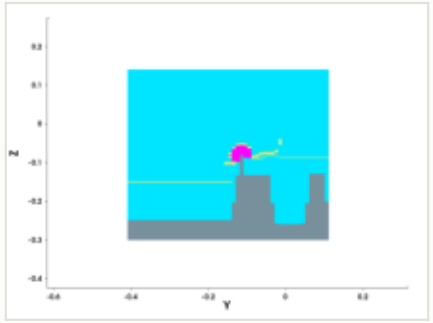

y cut at -0.150 µm

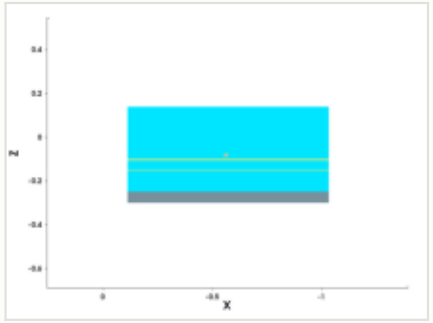

mask for this step

no mask for this step

steps by process area

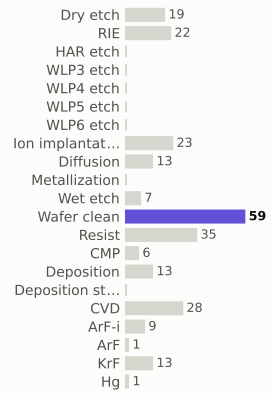

materials deposited (g)



gases emitted (g)

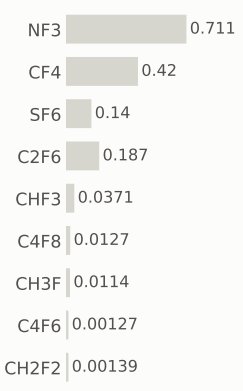

Step #3390: Deposition

depo_isotropic · Deposition

0.656	161.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

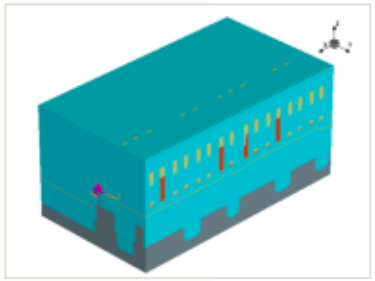

this step

process area	Deposition
material	—
thickness	0.005 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

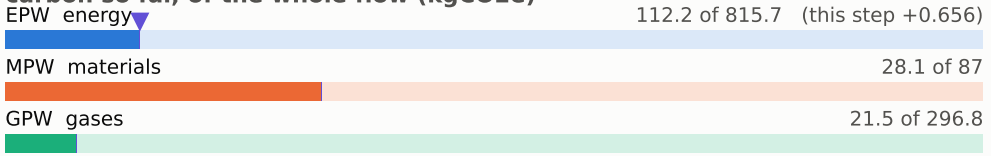

embodied carbon up to each step (kgCO2e per wafer)

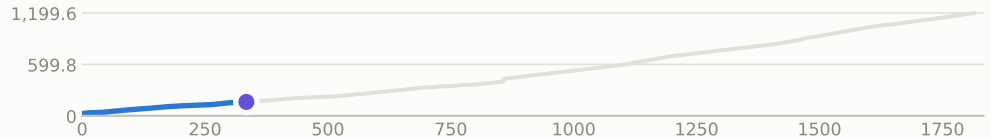

x cut at -0.570 µm

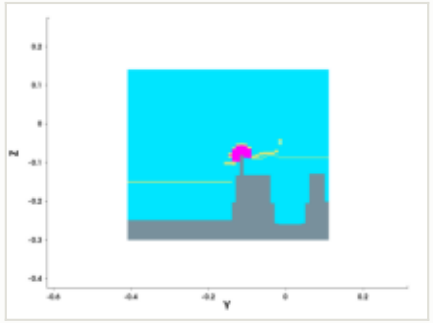

y cut at -0.150 µm

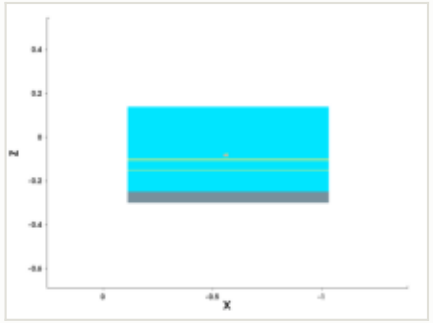

mask for this step

no mask for this step

steps by process area

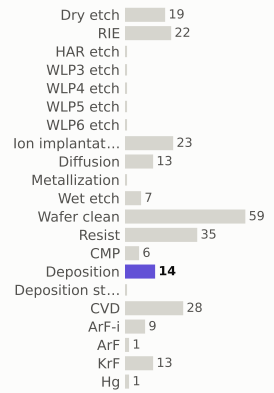

materials deposited (g)

gases emitted (g)

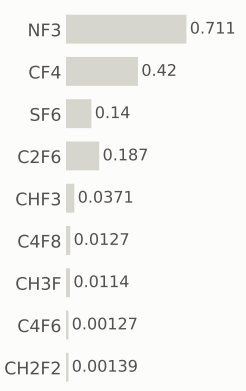

Step #3400: Deposition

depo_fill · Deposition

0.656	162.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

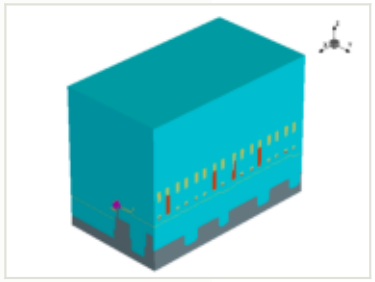

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.25 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

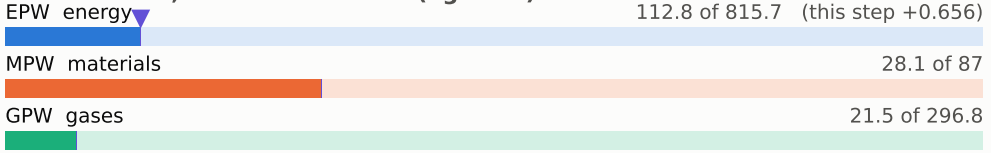

embodied carbon up to each step (kgCO2e per wafer)

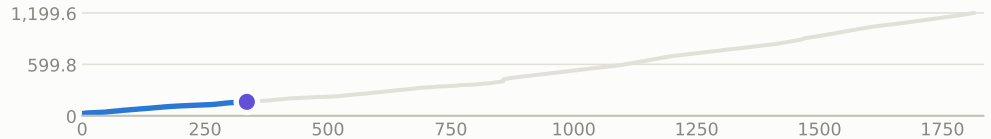

x cut at -0.570 µm

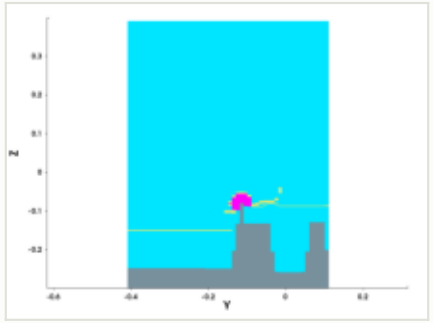

y cut at -0.150 µm

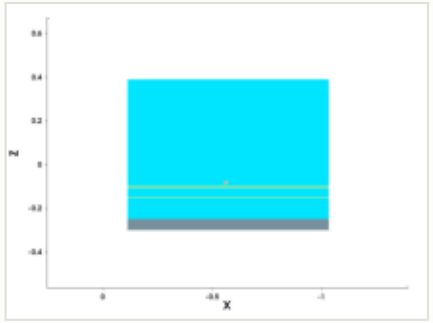

mask for this step

no mask for this step

steps by process area

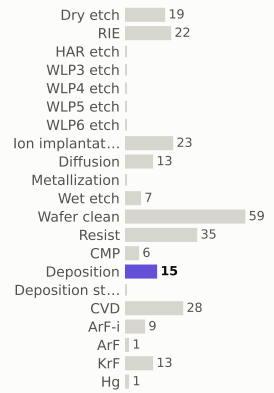

materials deposited (g)

gases emitted (g)

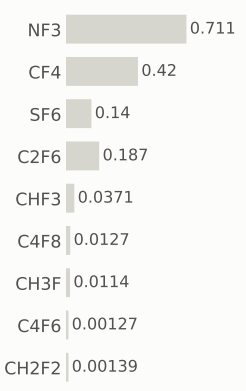

Step #3410: Wafer_clean

clean · Wafer_clean

0.169	162.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

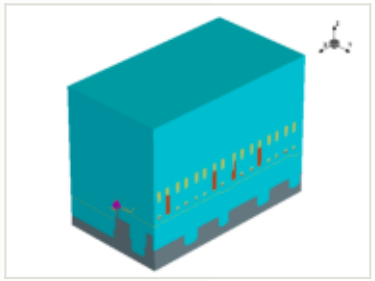

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

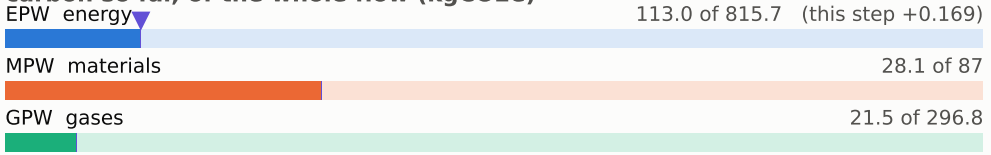

embodied carbon up to each step (kgCO2e per wafer)

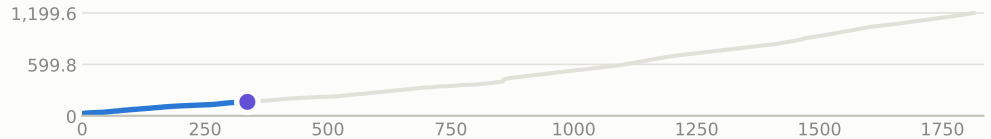

x cut at -0.570 µm

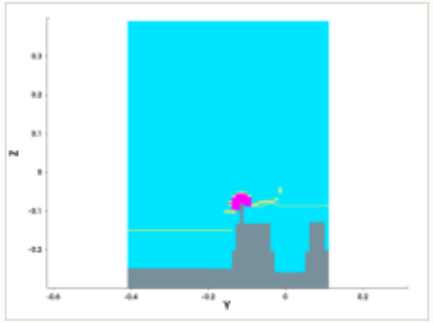

y cut at -0.150 µm

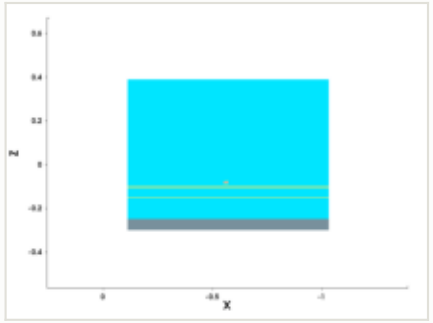

mask for this step

no mask for this step

steps by process area

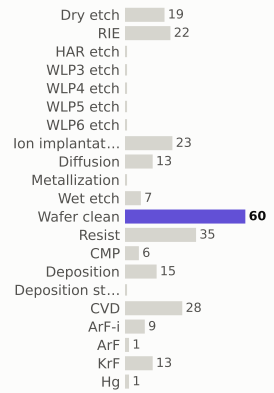

materials deposited (g)

gases emitted (g)

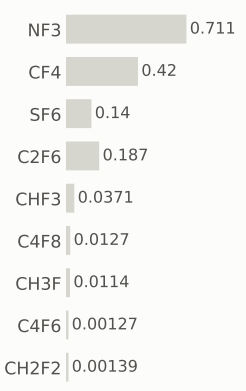

Step #3420: CMP

etch_cmp · CMP

0.169	162.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

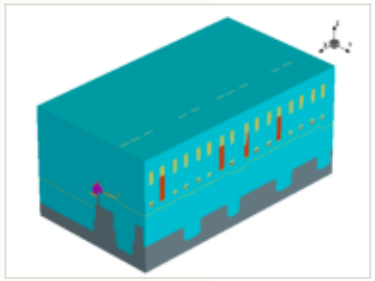

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

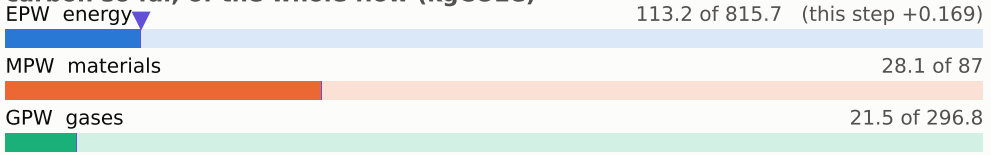

embodied carbon up to each step (kgCO2e per wafer)

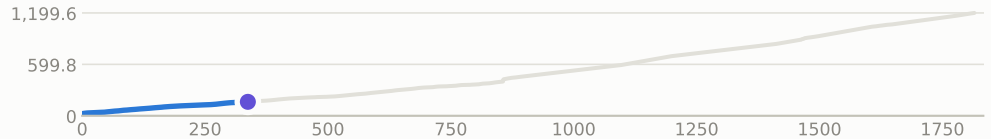

x cut at -0.570 µm

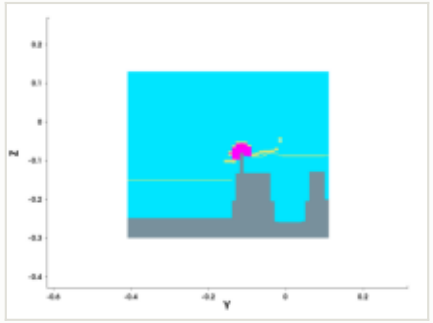

y cut at -0.150 µm

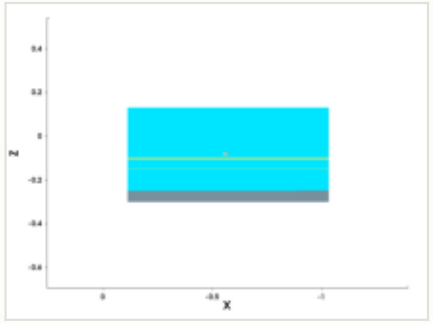

mask for this step

no mask for this step

steps by process area

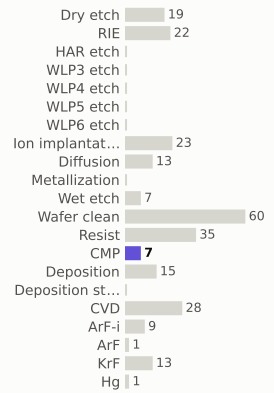

materials deposited (g)

gases emitted (g)

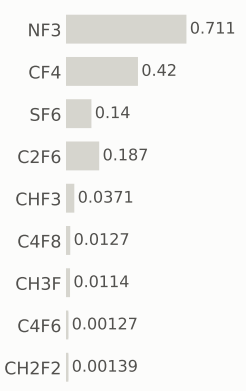

Step #3430: RIE

etch_ellipsoidal · RIE

1.04	163.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

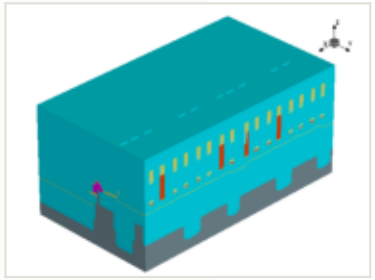

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 114.0 of 815.7 (this step +0.801)

MPW materials — 28.2 of 87 (this step +0.0571)

GPW gases — 21.7 of 296.8 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)

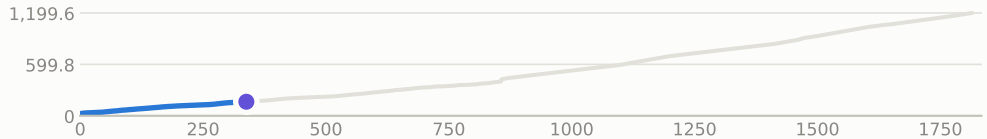

x cut at -0.570 µm

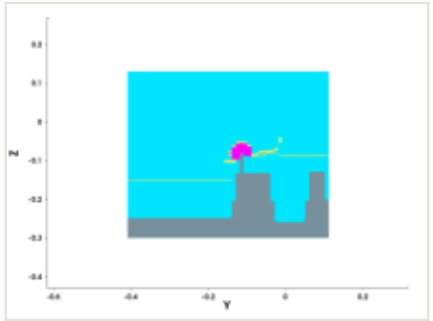

y cut at -0.150 µm

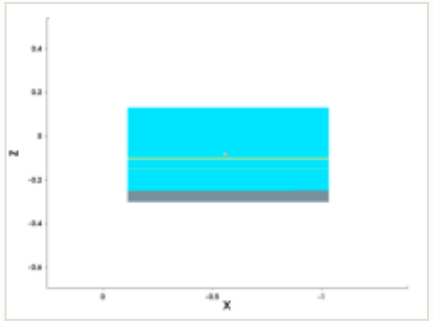

mask for this step

no mask for this step

steps by process area

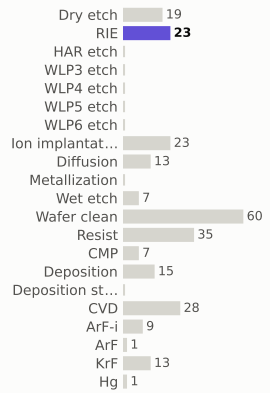

materials deposited (g)

gases emitted (g)

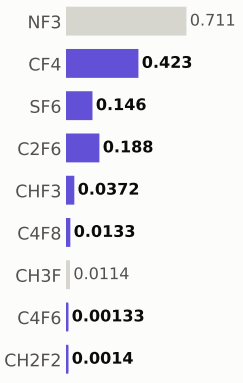

Step #3440: Wafer_clean

clean · Wafer_clean

0.169	164.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

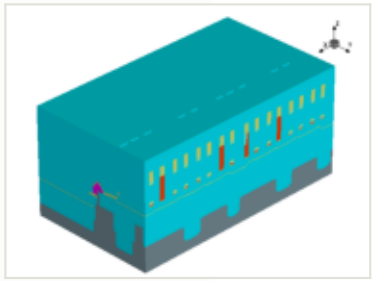

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

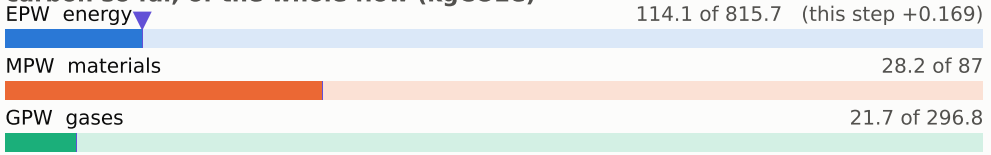

embodied carbon up to each step (kgCO2e per wafer)

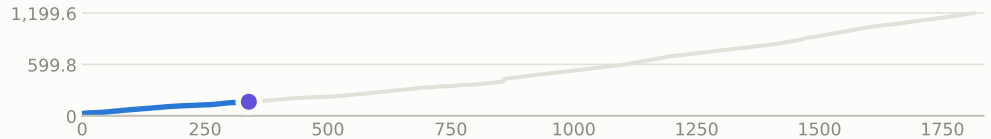

x cut at -0.570 µm

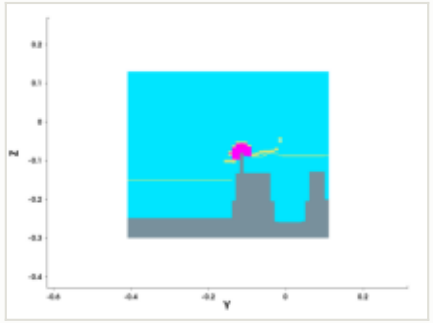

y cut at -0.150 µm

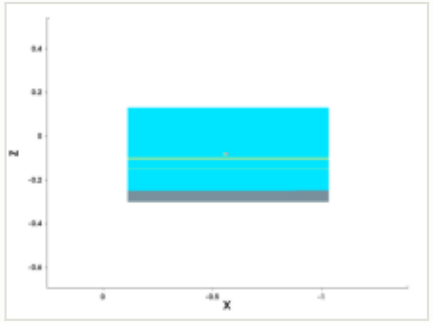

mask for this step

no mask for this step

steps by process area

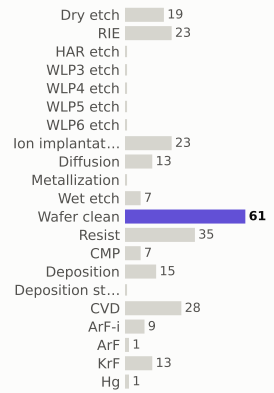

materials deposited (g)

gases emitted (g)

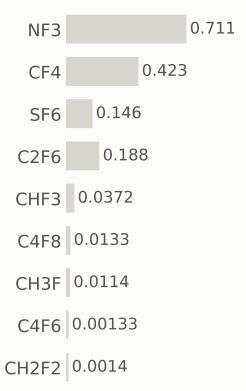

Step #3450: CMP

etch_cmp · CMP

0.169	164.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

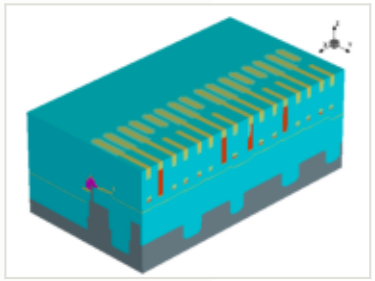

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

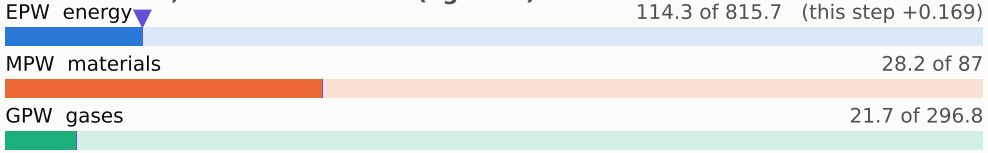

embodied carbon up to each step (kgCO2e per wafer)

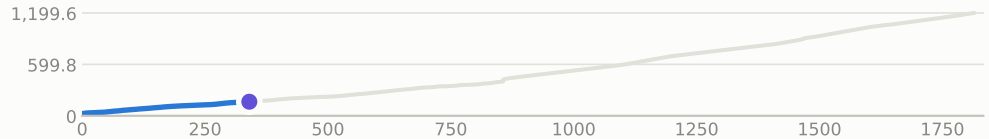

x cut at -0.570 µm

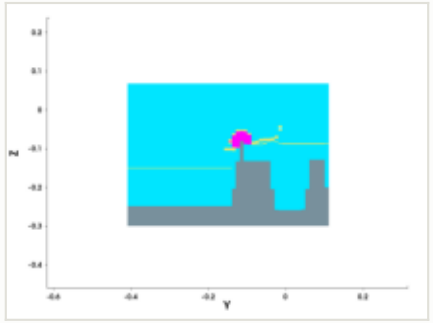

y cut at -0.150 µm

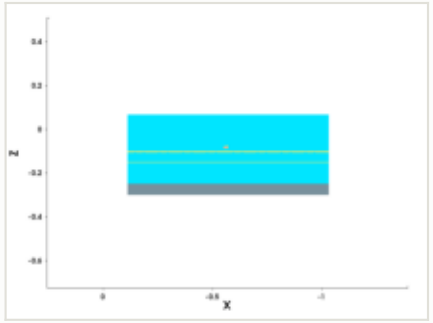

mask for this step

no mask for this step

steps by process area

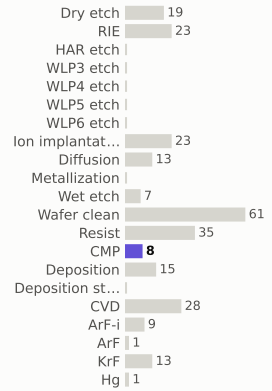

materials deposited (g)

gases emitted (g)

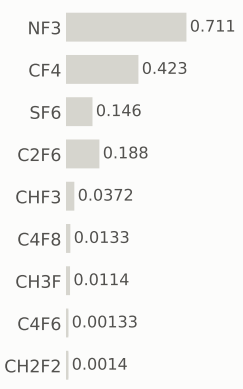

Step #3460: Spx_only

etch_anisotropic · Spx_only

0	164.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

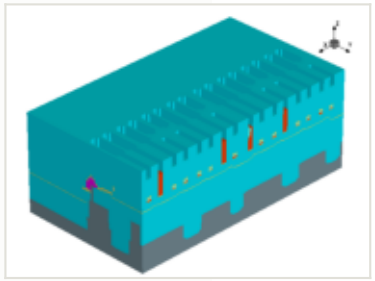

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

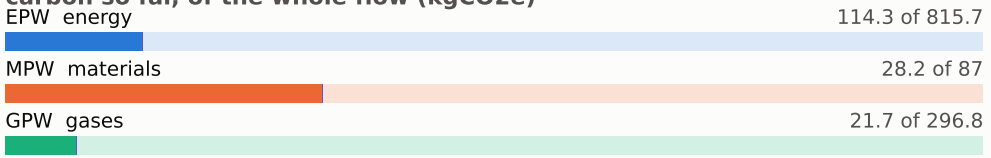

embodied carbon up to each step (kgCO2e per wafer)

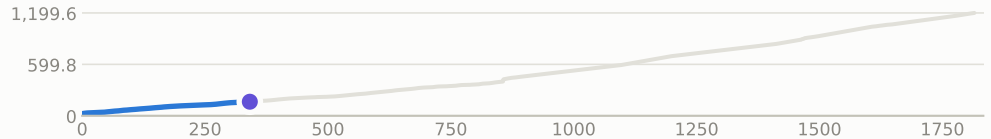

x cut at -0.570 µm

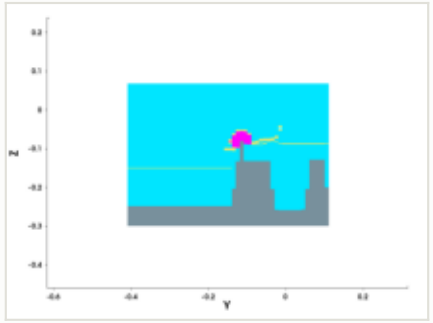

y cut at -0.150 µm

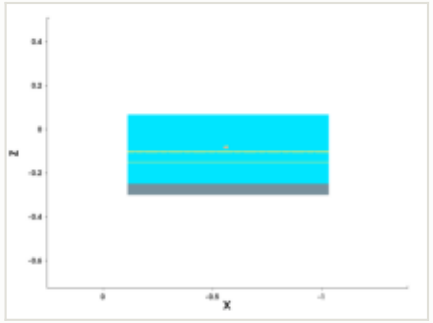

mask for this step

no mask for this step

steps by process area

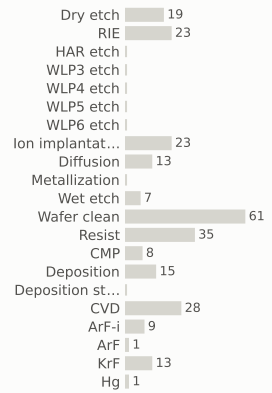

materials deposited (g)

gases emitted (g)

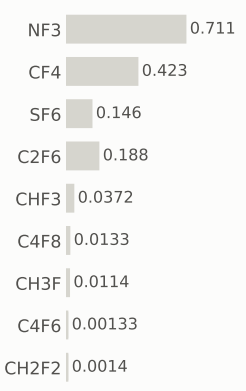

Step #3470: RIE

etch_anisotropic · RIE

1.04	165.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

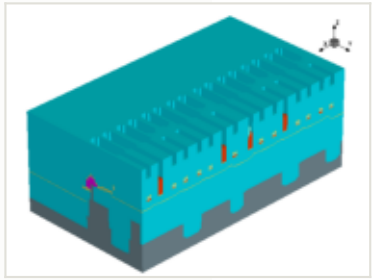

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 115.1 of 815.7 (this step +0.801)

MPW materials — 28.3 of 87 (this step +0.0571)

GPW gases — 21.9 of 296.8 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)

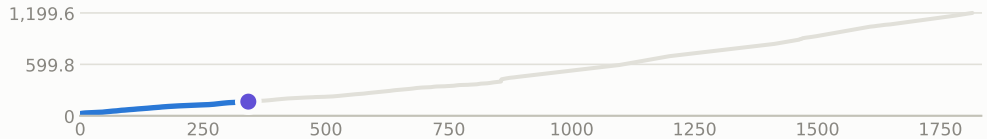

x cut at -0.570 µm

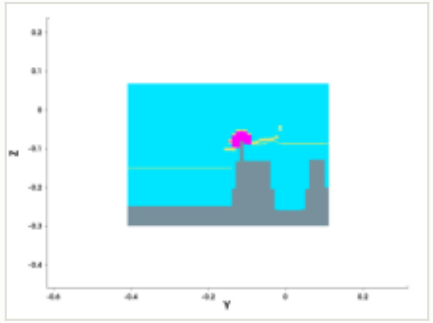

y cut at -0.150 µm

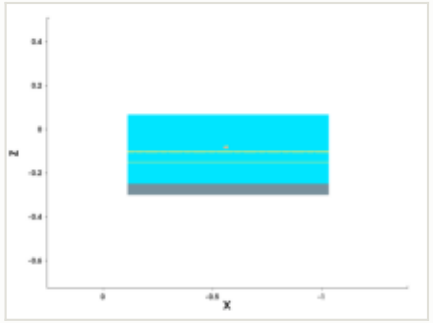

mask for this step

no mask for this step

steps by process area

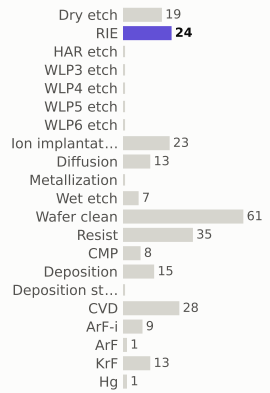

materials deposited (g)

gases emitted (g)

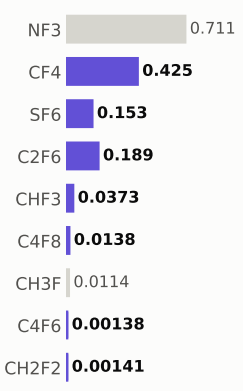

Step #3480: Wafer_clean

clean · Wafer_clean

0.169	165.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

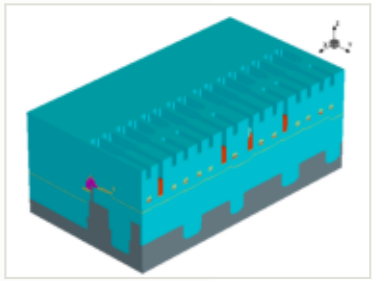

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

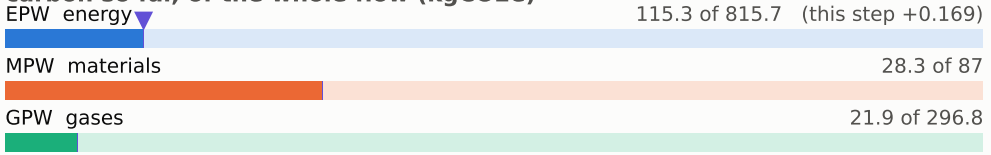

embodied carbon up to each step (kgCO2e per wafer)

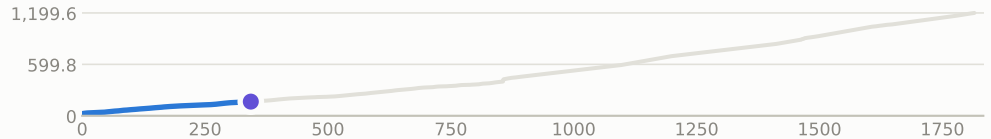

x cut at -0.570 µm

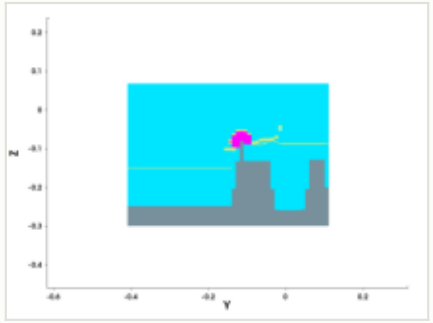

y cut at -0.150 µm

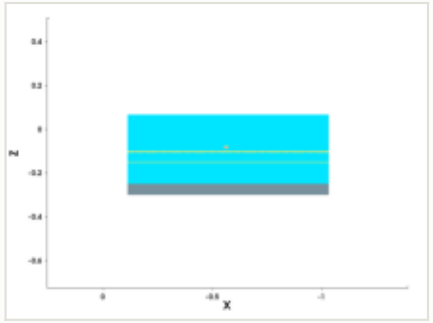

mask for this step

no mask for this step

steps by process area

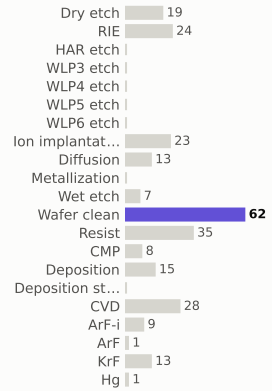

materials deposited (g)

gases emitted (g)

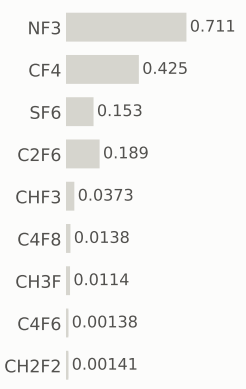

Step #3490: Wet_etch

etch_isotropic · Wet_etch

0.169	165.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

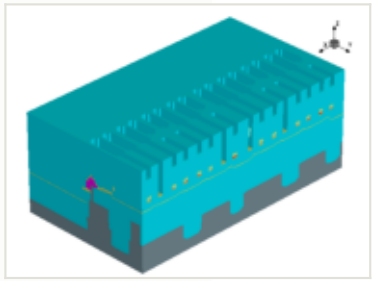

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

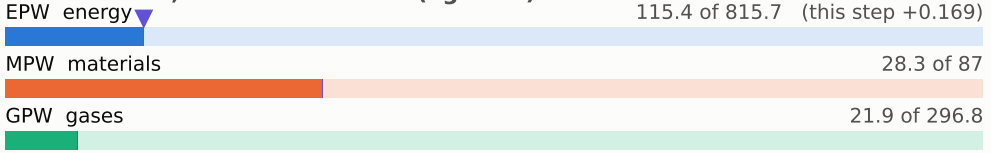

embodied carbon up to each step (kgCO2e per wafer)

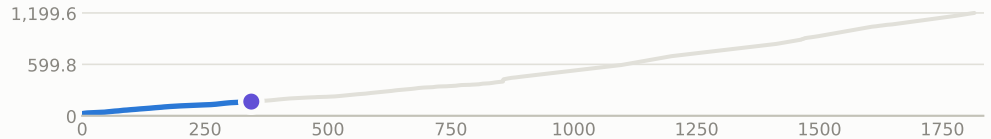

x cut at -0.570 µm

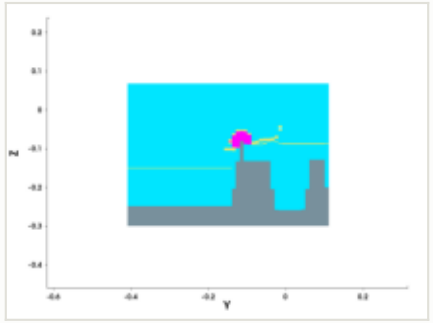

y cut at -0.150 µm

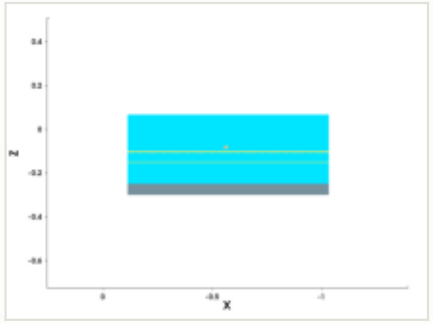

mask for this step

no mask for this step

steps by process area

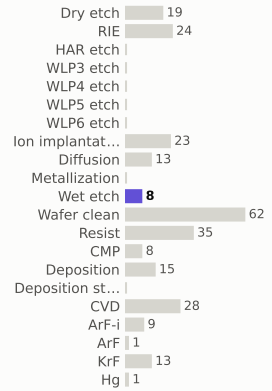

materials deposited (g)

gases emitted (g)

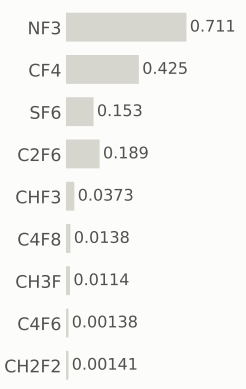

Step #3500: Spx_only

etch_isotropic · Spx_only

0	165.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

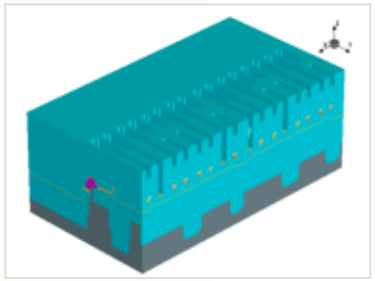

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

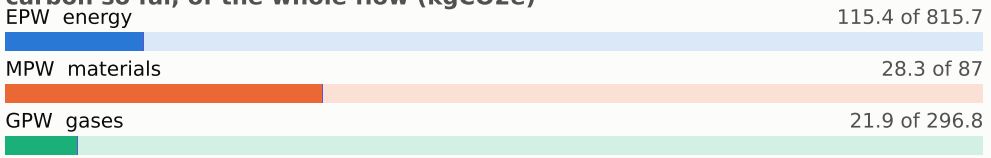

embodied carbon up to each step (kgCO2e per wafer)

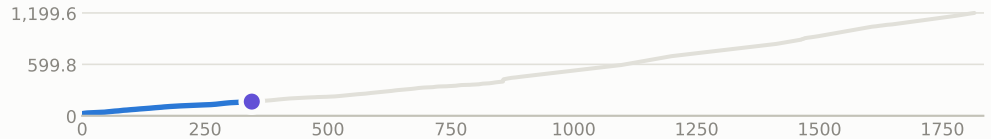

x cut at -0.570 µm

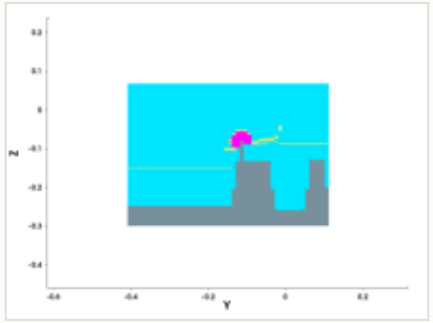

y cut at -0.150 µm

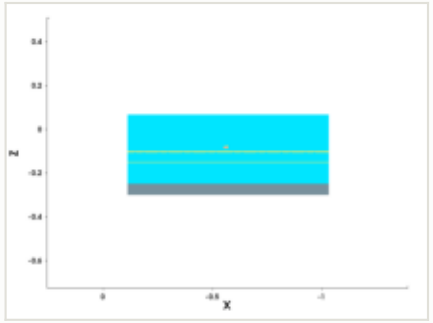

mask for this step

no mask for this step

steps by process area

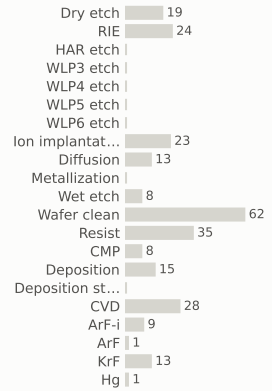

materials deposited (g)

gases emitted (g)

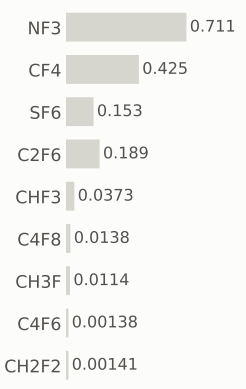

Step #3510: Spx_only

depo_isotropic · Spx_only

0	165.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

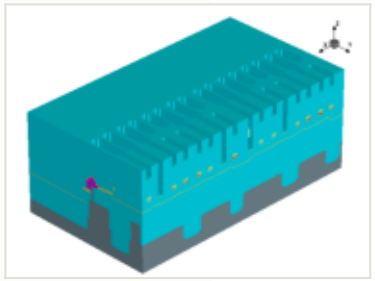

x cut at -0.570 µm

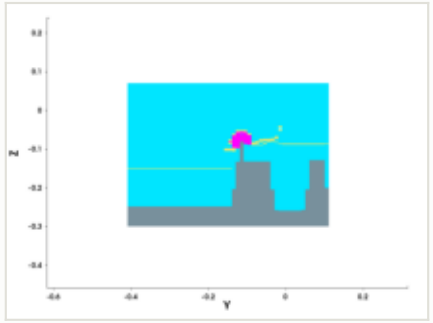

y cut at -0.150 µm

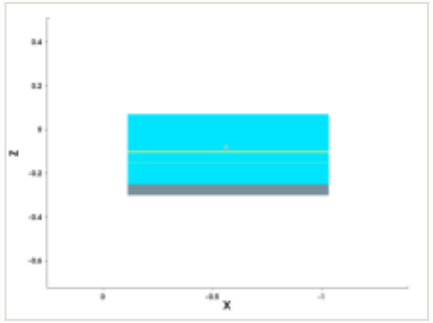

mask for this step

no mask for this step

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.002 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

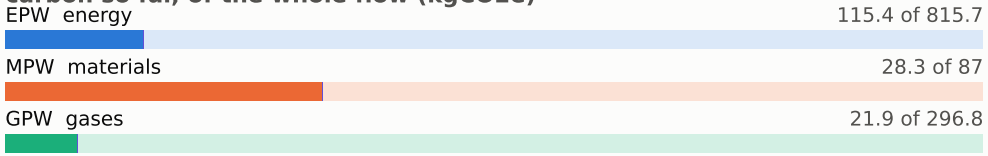

embodied carbon up to each step (kgCO2e per wafer)

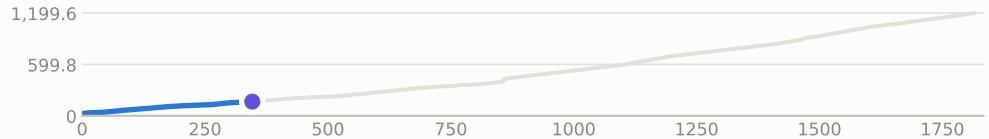

steps by process area

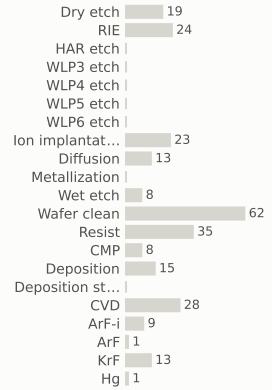

materials deposited (g)

gases emitted (g)

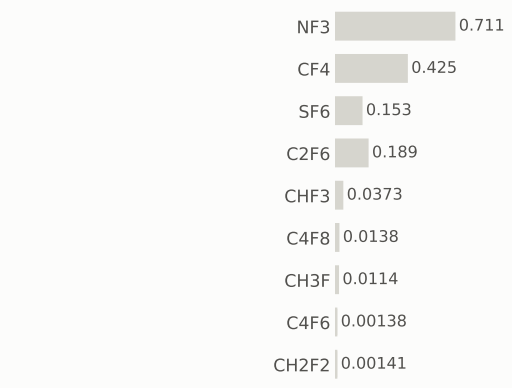

Step #3530: Deposition

depo_isotropic · Deposition

0.656	166.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

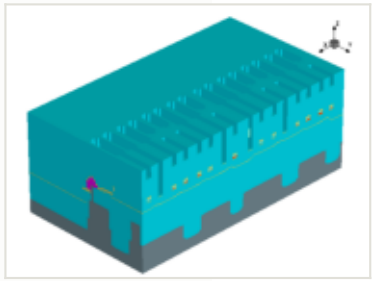

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

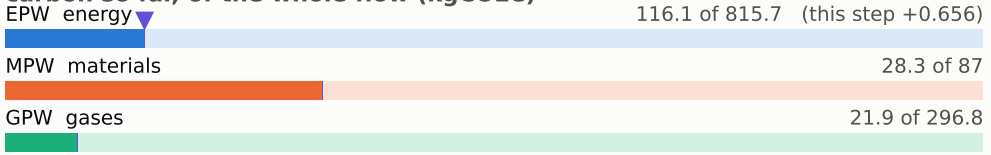

embodied carbon up to each step (kgCO2e per wafer)

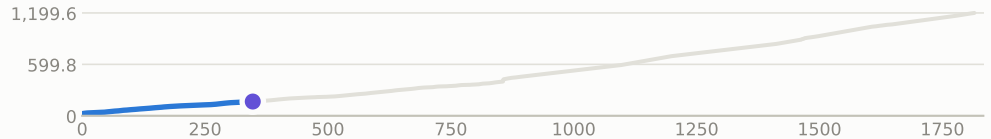

x cut at -0.570 µm

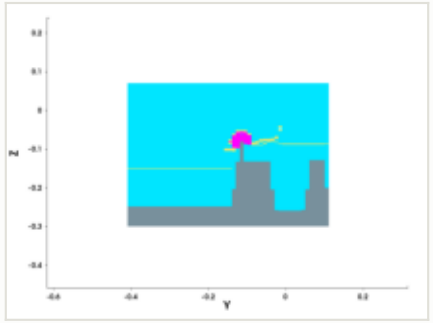

y cut at -0.150 µm

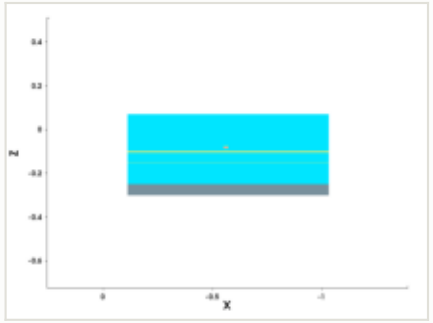

mask for this step

no mask for this step

steps by process area

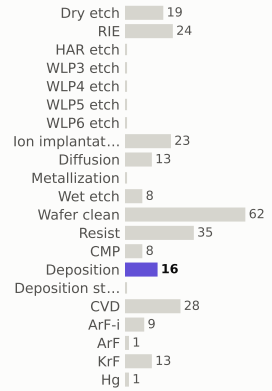

materials deposited (g)

gases emitted (g)

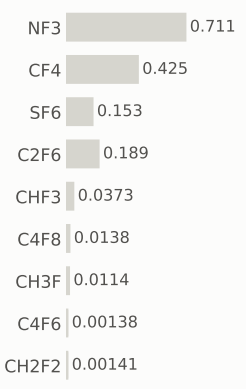

Step #3540: Resist

resist · Resist

0.169	166.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

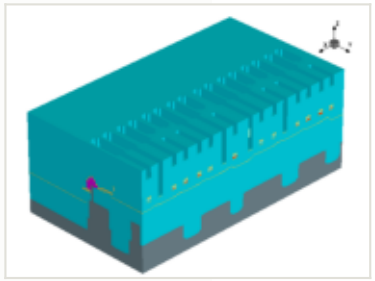

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

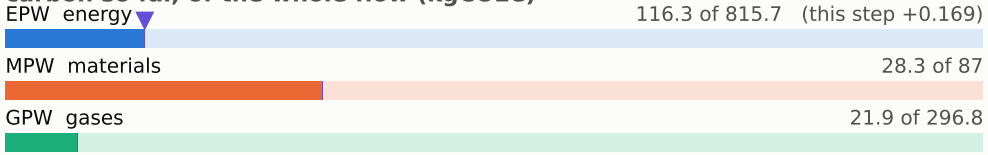

embodied carbon up to each step (kgCO2e per wafer)

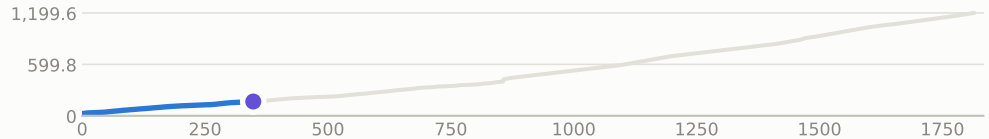

x cut at -0.570 µm

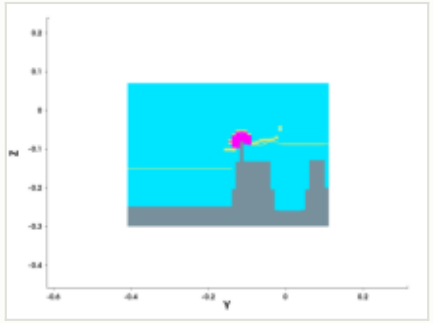

y cut at -0.150 µm

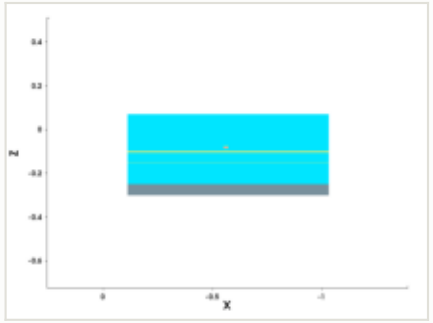

mask for this step

no mask for this step

steps by process area

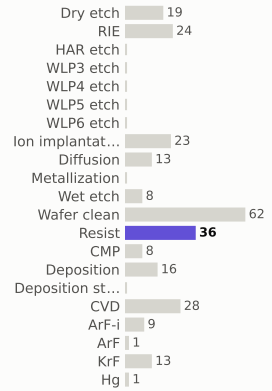

materials deposited (g)

gases emitted (g)

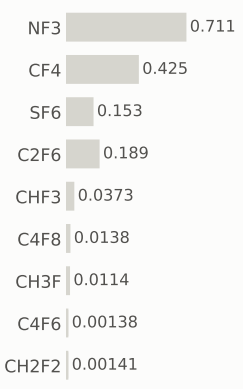

Step #3550: KrF

litho_patterning · KrF

0.199	166.6	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

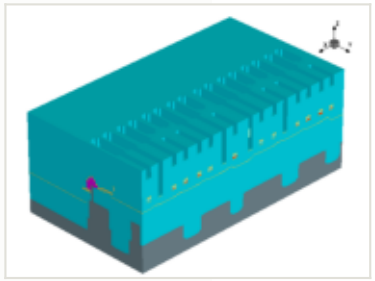

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

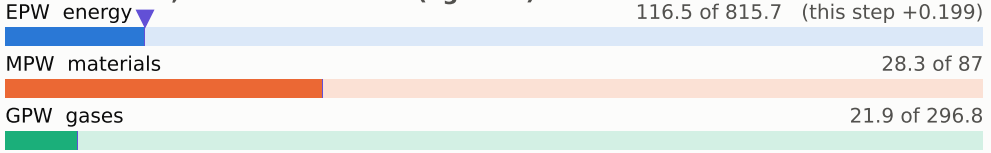

embodied carbon up to each step (kgCO2e per wafer)

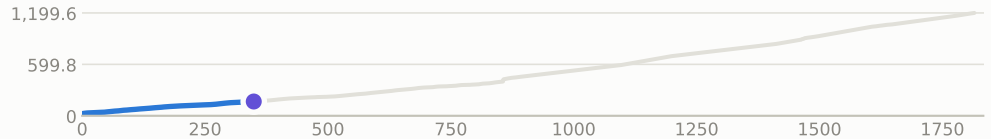

x cut at -0.570 µm

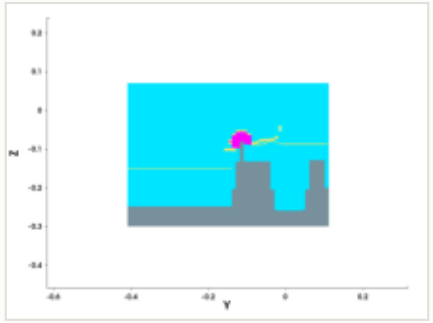

y cut at -0.150 µm

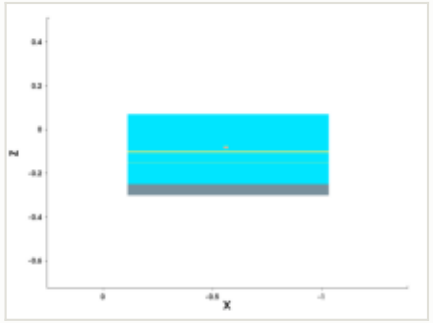

mask for this step

no mask for this step

steps by process area

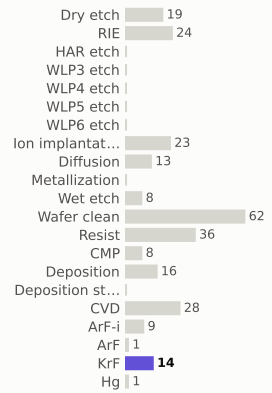

materials deposited (g)

gases emitted (g)

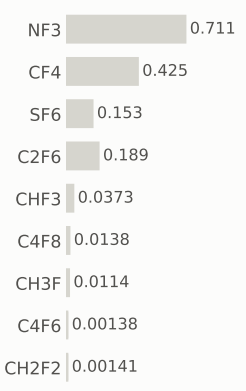

Step #3560: RIE

etch_anisotropic · RIE

1.04	167.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

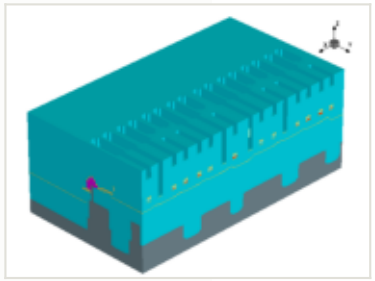

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 117.3 of 815.7 (this step +0.801)

MPW materials — 28.3 of 87 (this step +0.0571)

GPW gases — 22 of 296.8 (this step +0.187)

embodied carbon up to each step (kgCO2e per wafer)

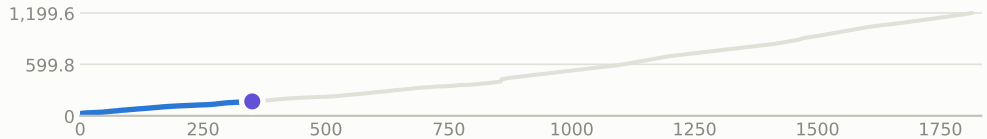

x cut at -0.570 µm

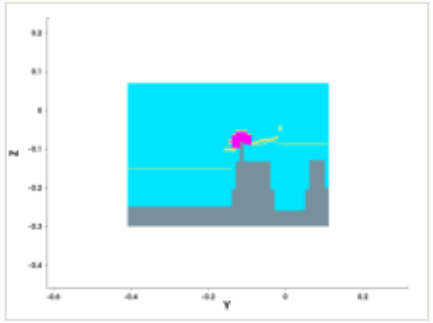

y cut at -0.150 µm

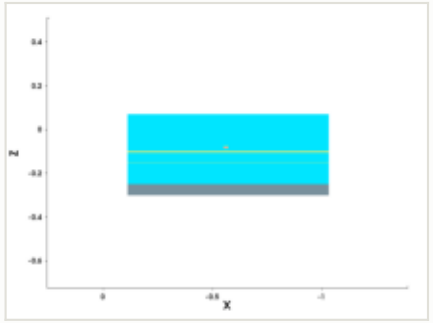

mask for this step

no mask for this step

steps by process area

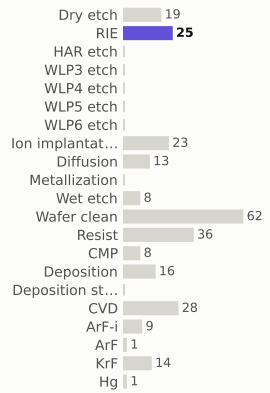

materials deposited (g)

gases emitted (g)

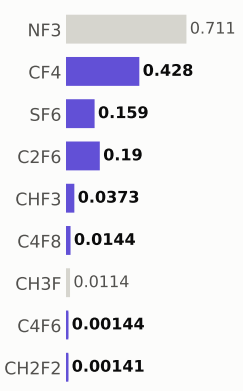

Step #3570: Wet_etch

etch_isotropic · Wet_etch

0.169	167.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

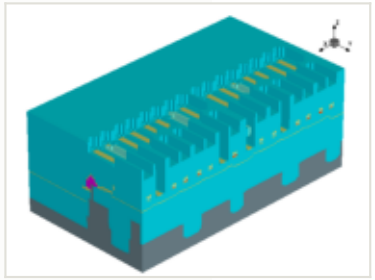

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

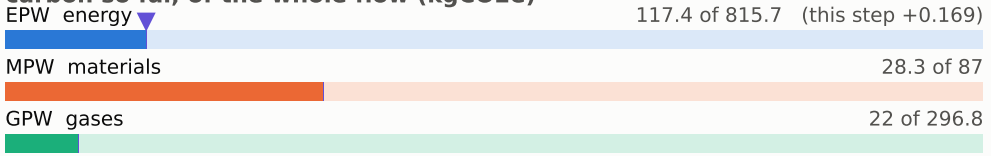

embodied carbon up to each step (kgCO2e per wafer)

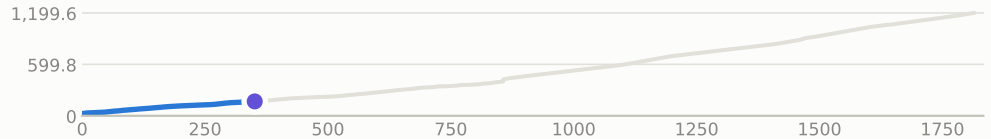

x cut at -0.570 µm

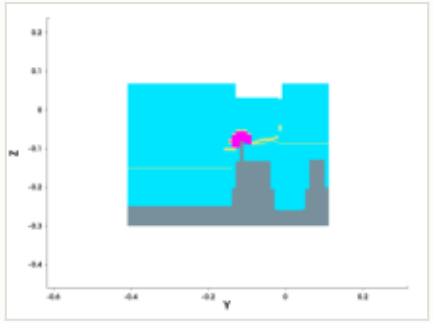

y cut at -0.150 µm

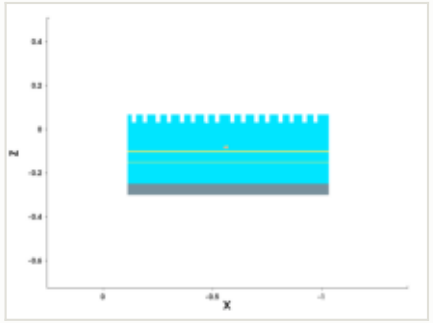

mask for this step

no mask for this step

steps by process area

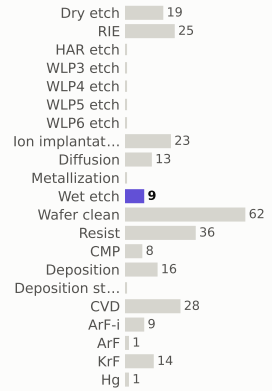

materials deposited (g)

gases emitted (g)

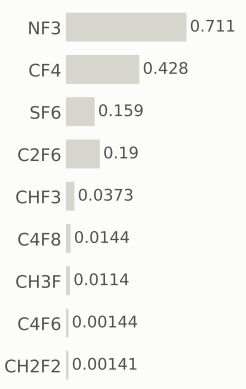

Step #3580: Dry_etch

etch_isotropic · Dry_etch

0.801	168.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

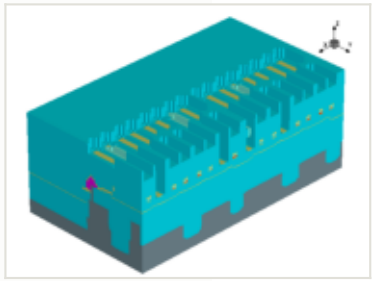

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

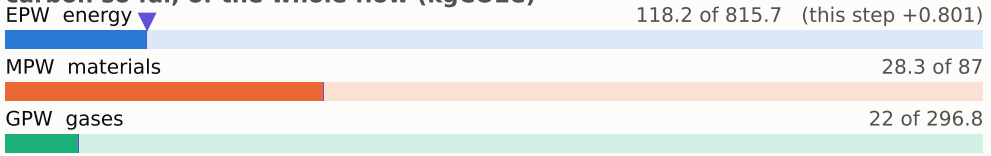

embodied carbon up to each step (kgCO2e per wafer)

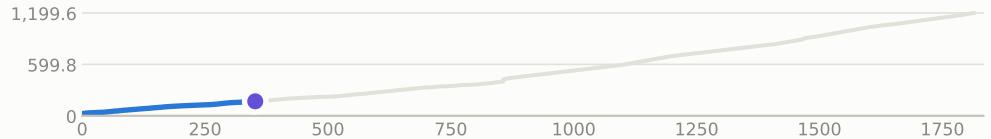

x cut at -0.570 µm

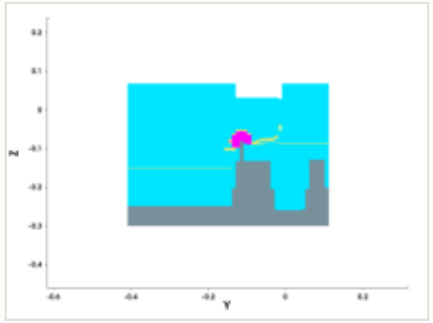

y cut at -0.150 µm

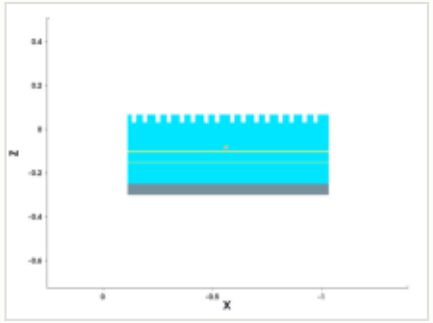

mask for this step

no mask for this step

steps by process area

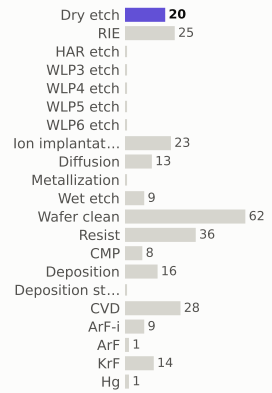

materials deposited (g)

gases emitted (g)

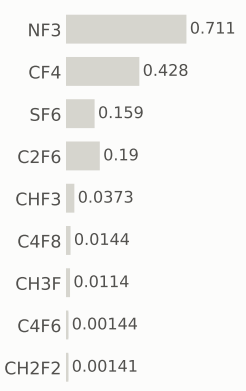

Step #3590: Spx_only

depo_isotropic · Spx_only

0	168.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

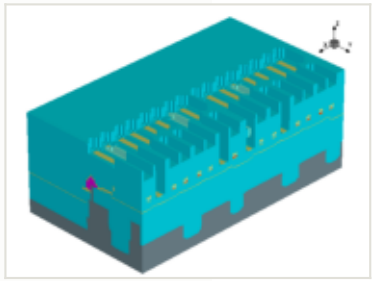

x cut at -0.570 µm

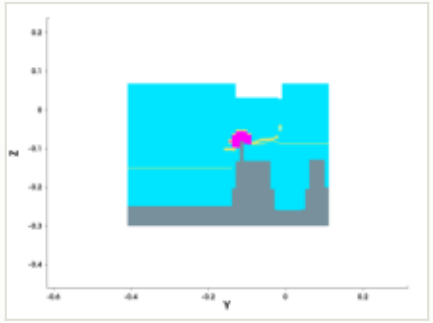

y cut at -0.150 µm

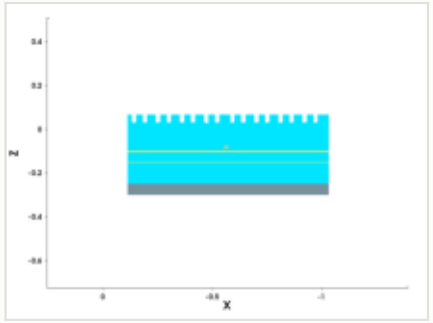

mask for this step

no mask for this step

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.001 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

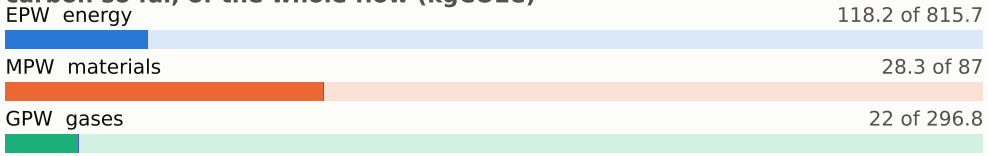

embodied carbon up to each step (kgCO2e per wafer)

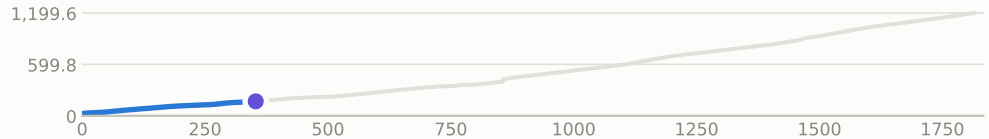

steps by process area

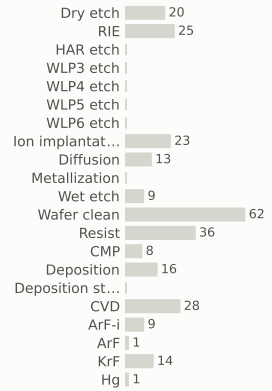

materials deposited (g)

gases emitted (g)

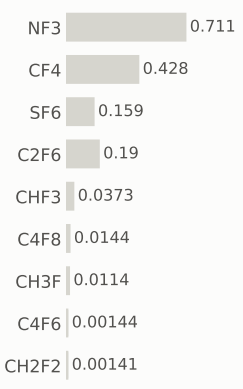

Step #3600: Wafer_clean

clean · Wafer_clean

0.169	168.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

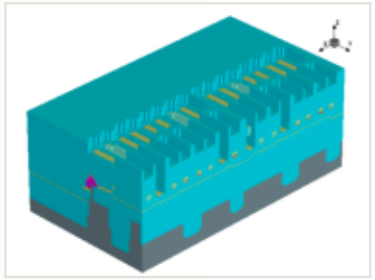

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

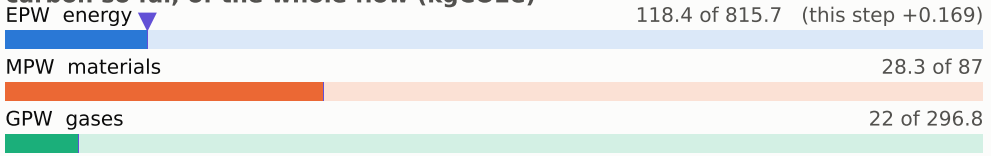

embodied carbon up to each step (kgCO2e per wafer)

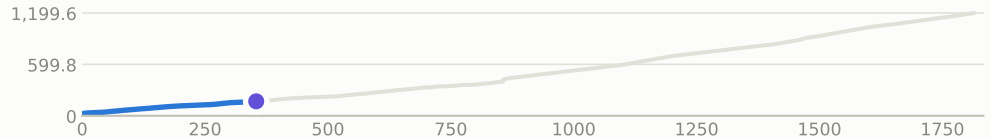

x cut at -0.570 µm

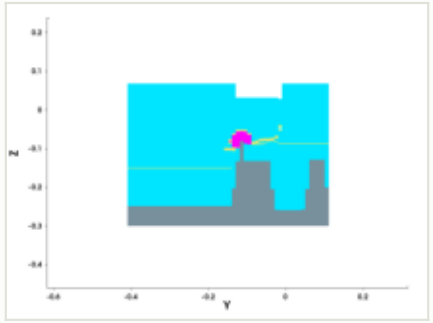

y cut at -0.150 µm

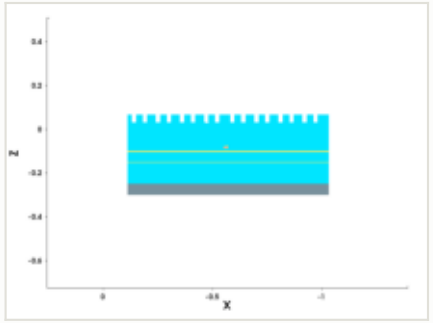

mask for this step

no mask for this step

steps by process area

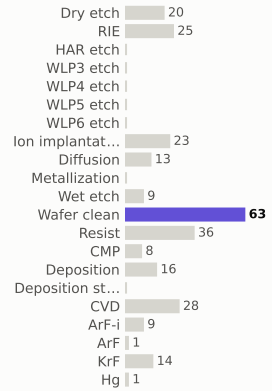

materials deposited (g)

gases emitted (g)

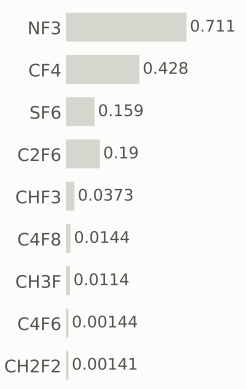

Step #3610: Wafer_clean

clean · Wafer_clean

0.169	168.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

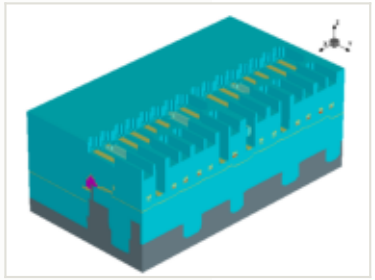

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

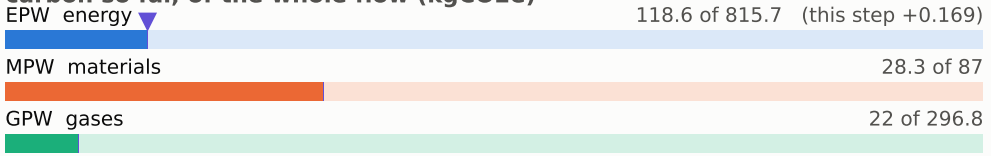

embodied carbon up to each step (kgCO2e per wafer)

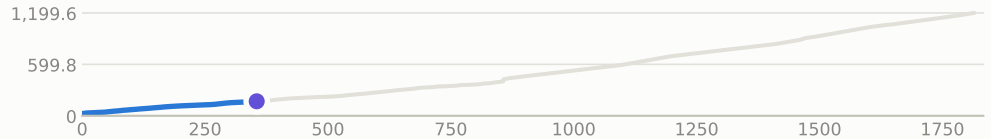

x cut at -0.570 µm

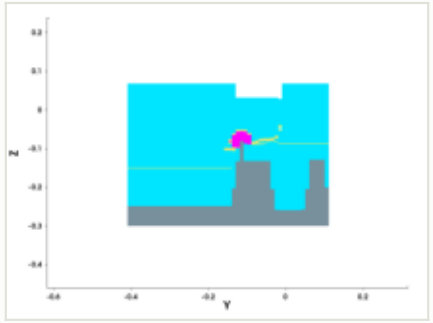

y cut at -0.150 µm

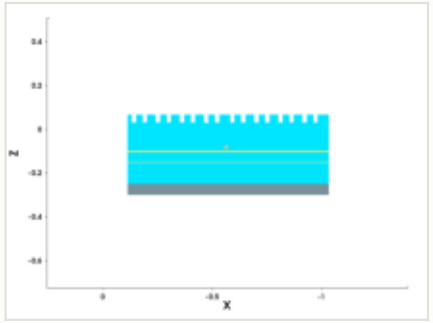

mask for this step

no mask for this step

steps by process area

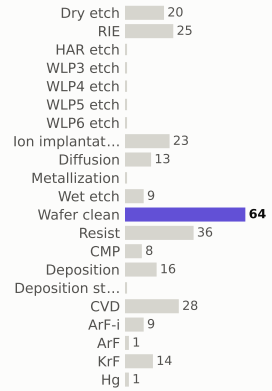

materials deposited (g)

gases emitted (g)

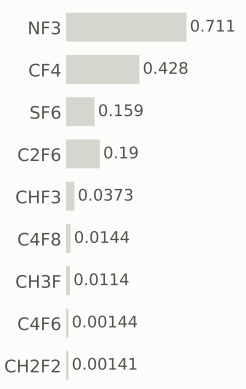

Step #3620: Wafer_clean

clean · Wafer_clean

0.169	169.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

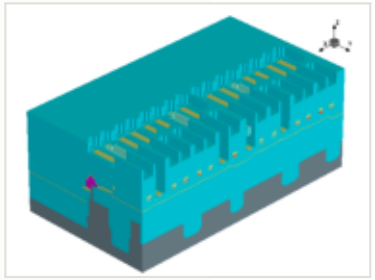

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

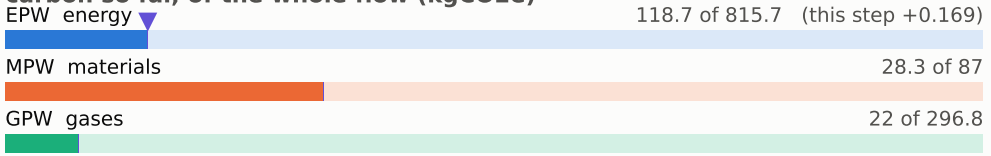

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

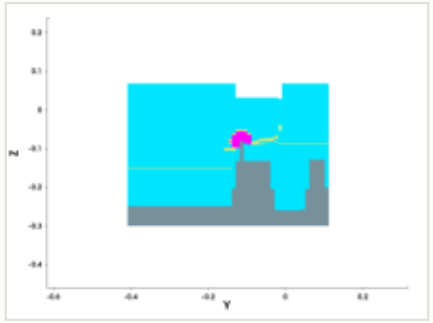

y cut at -0.150 µm

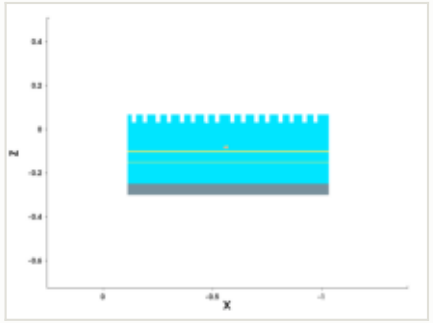

mask for this step

no mask for this step

steps by process area

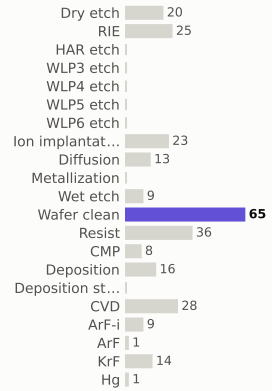

materials deposited (g)

gases emitted (g)

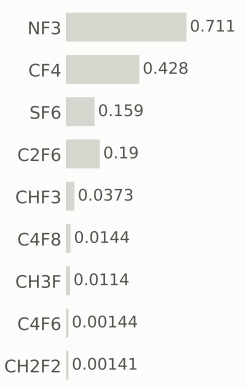

Step #3630: Deposition

depo_isotropic · Deposition

0.656	169.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

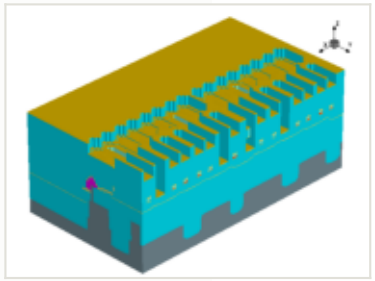

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.0015 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

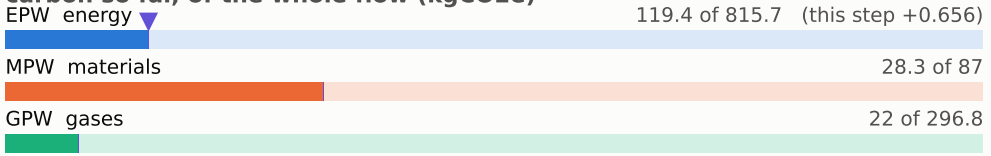

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

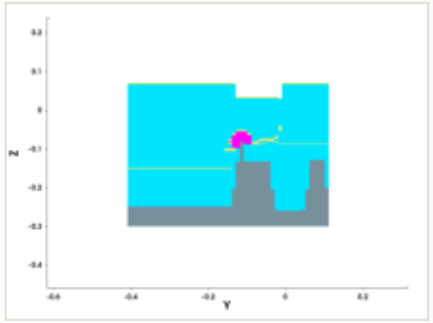

y cut at -0.150 µm

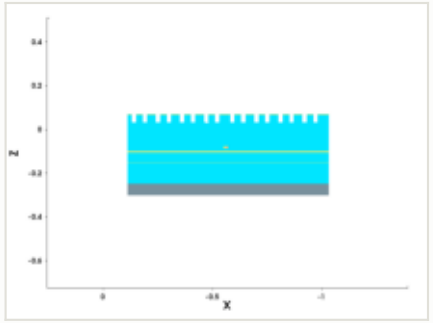

mask for this step

no mask for this step

steps by process area

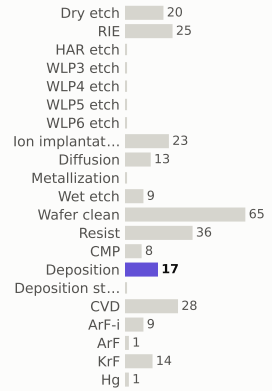

materials deposited (g)

gases emitted (g)

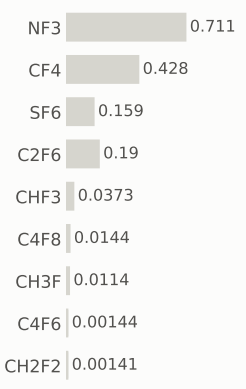

Step #3640: Diffusion

anneal · Diffusion

0.801	170.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

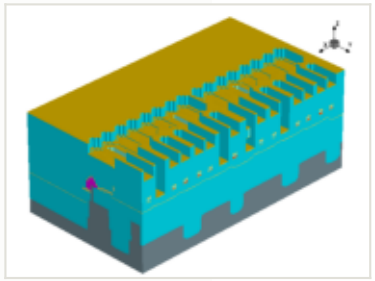

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

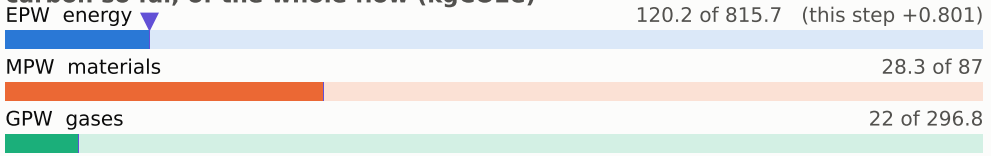

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

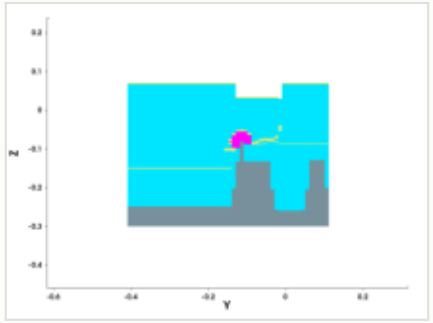

y cut at -0.150 µm

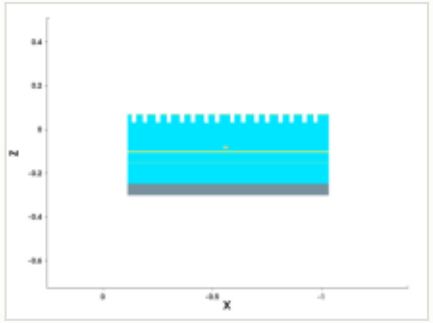

mask for this step

no mask for this step

steps by process area

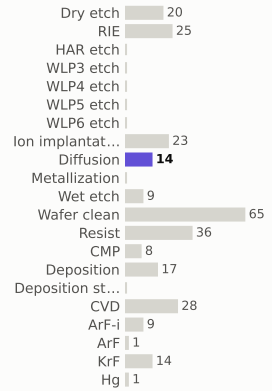

materials deposited (g)

gases emitted (g)

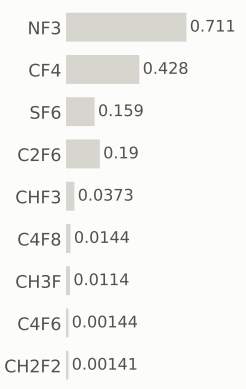

Step #3650: Deposition

depo_isotropic · Deposition

0.656	171.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

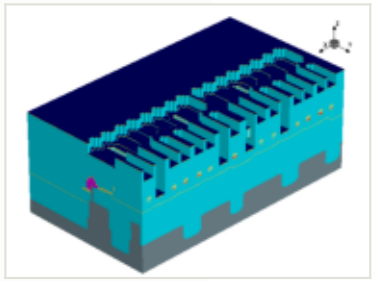

this step

process area	Deposition
material	TiN
thickness	0.001 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	1.62e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

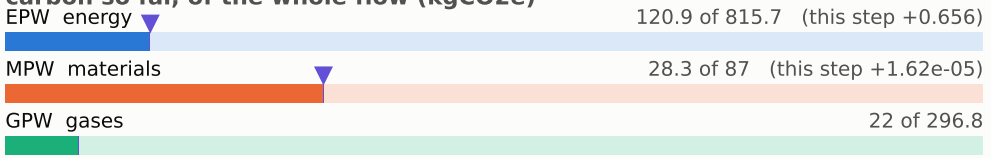

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

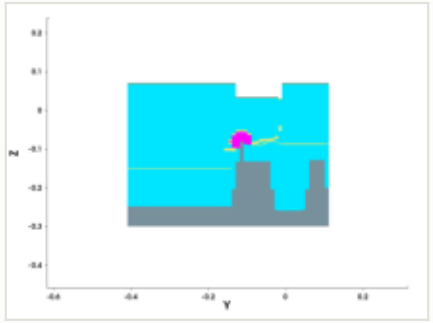

y cut at -0.150 µm

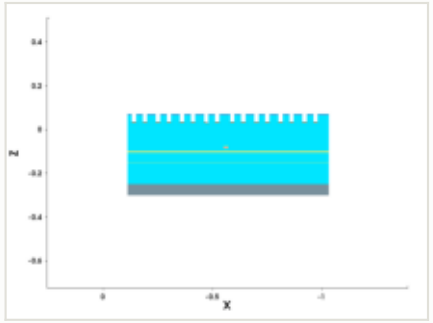

mask for this step

no mask for this step

steps by process area

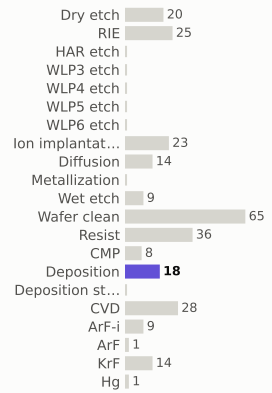

materials deposited (g)

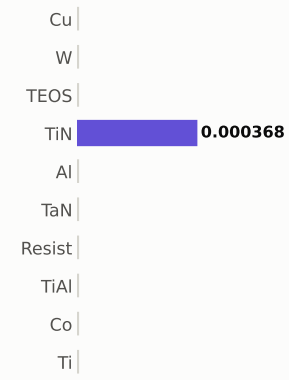

gases emitted (g)

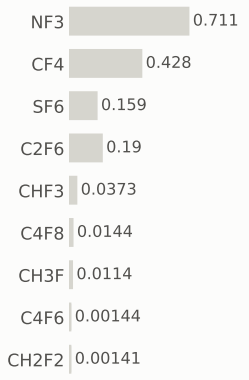

Step #3660: Spx_only

depo_fill · Spx_only

0	171.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

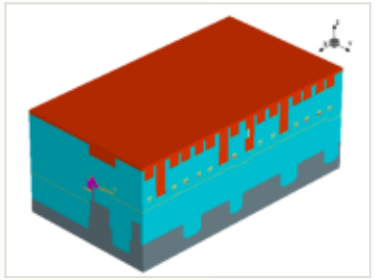

this step

process area	Spx_only
material	—
thickness	0.01 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

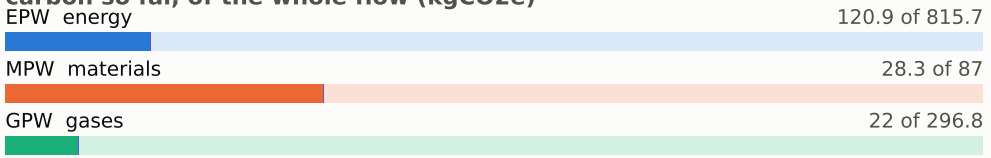

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

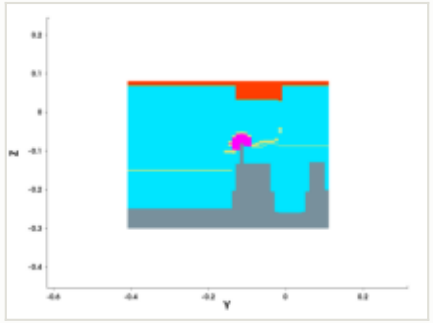

y cut at -0.150 µm

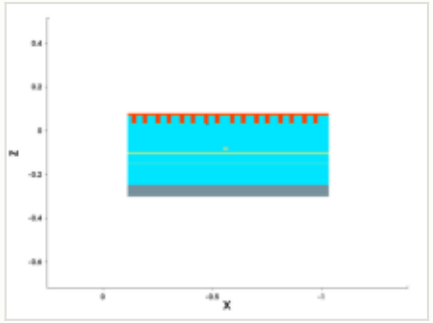

mask for this step

no mask for this step

steps by process area

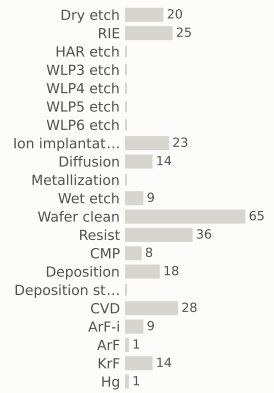

materials deposited (g)



gases emitted (g)

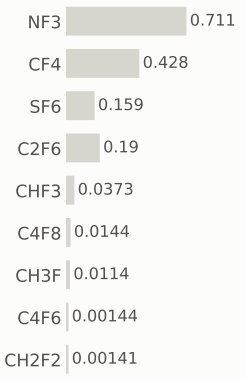

Step #3670: Wafer_clean

clean · Wafer_clean

0.169	171.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

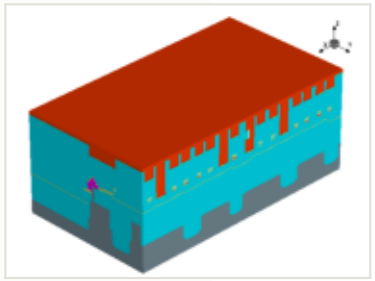

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

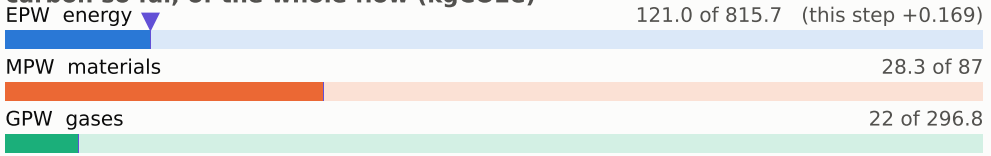

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

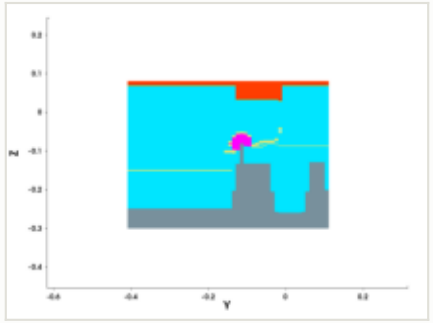

y cut at -0.150 µm

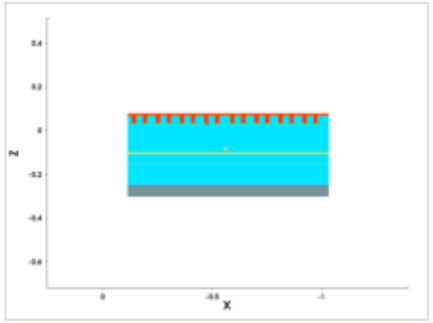

mask for this step

no mask for this step

steps by process area

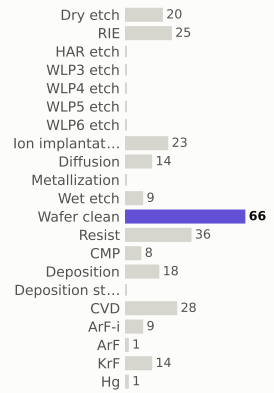

materials deposited (g)

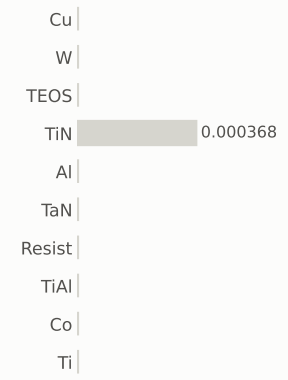

gases emitted (g)

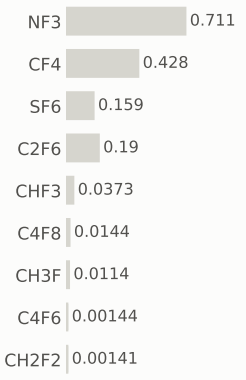

Step #3680: CVD

depo_isotropic · CVD

1.31	172.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

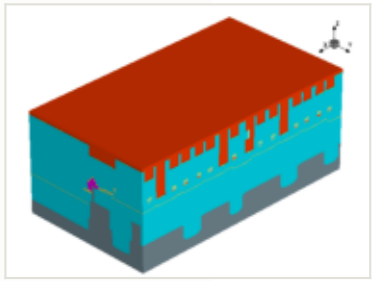

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

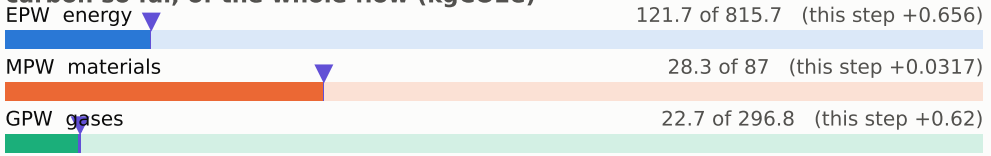

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

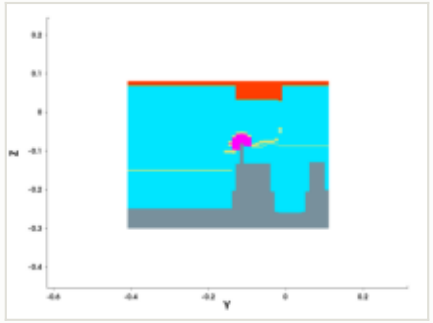

y cut at -0.150 µm

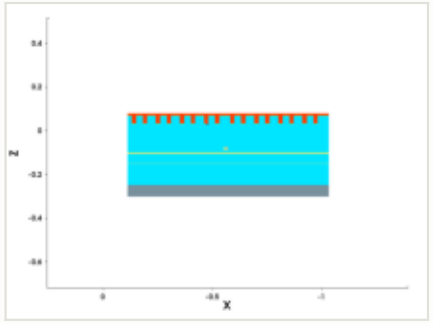

mask for this step

no mask for this step

steps by process area

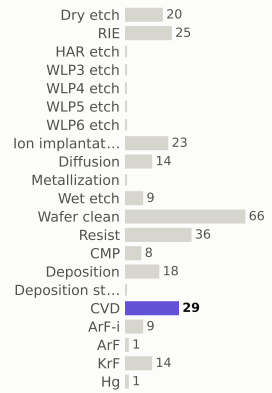

materials deposited (g)

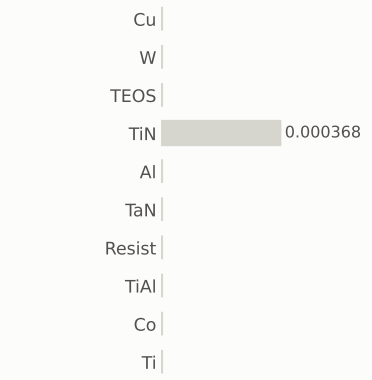

gases emitted (g)

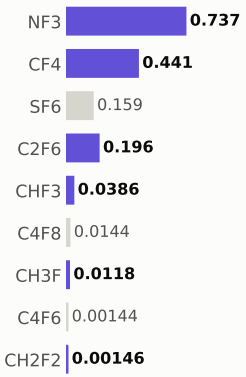

Step #3690: Wafer_clean

clean · Wafer_clean

0.169	172.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

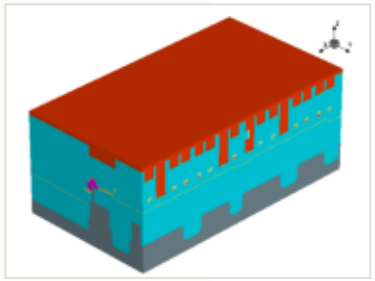

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

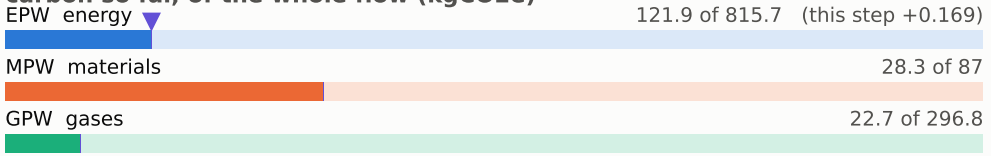

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

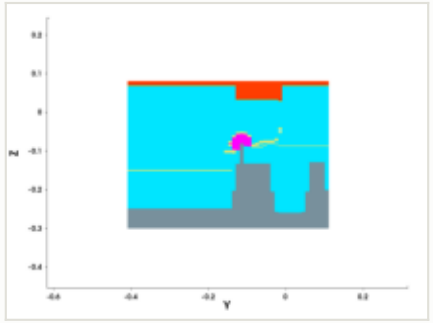

y cut at -0.150 µm

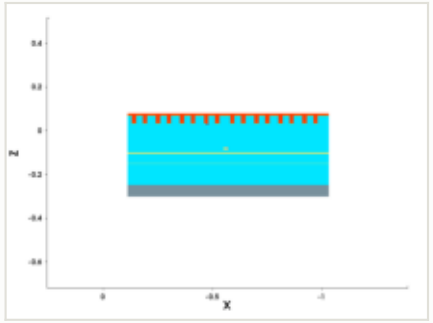

mask for this step

no mask for this step

steps by process area

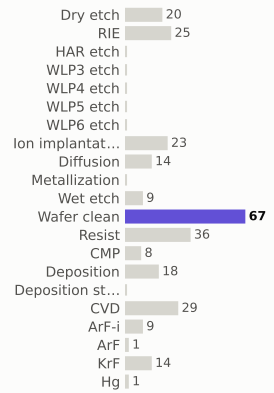

materials deposited (g)

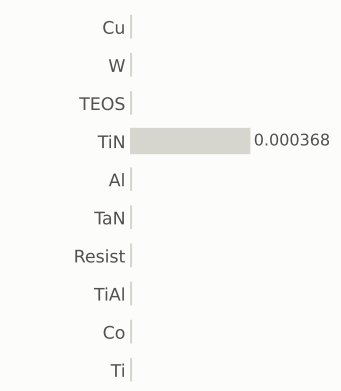

gases emitted (g)

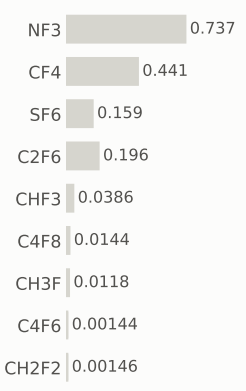

Step #3700: Diffusion

anneal · Diffusion

0.801	173.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

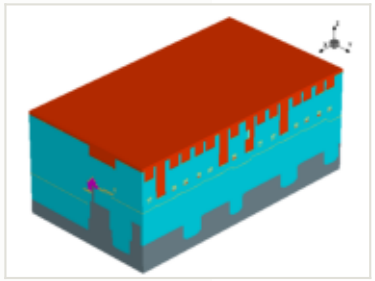

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

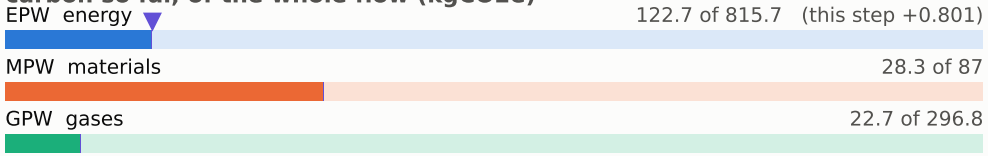

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

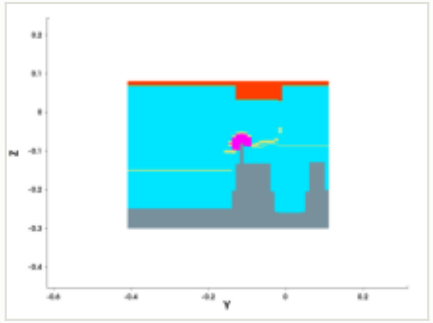

y cut at -0.150 µm

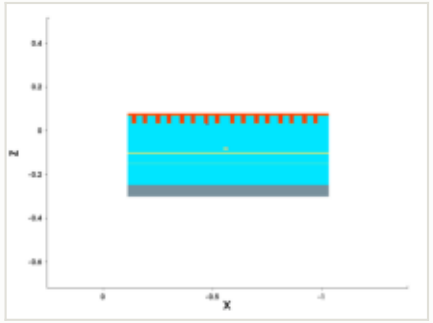

mask for this step

no mask for this step

steps by process area

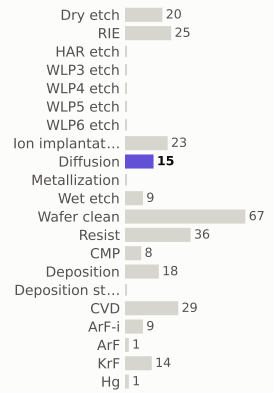

materials deposited (g)

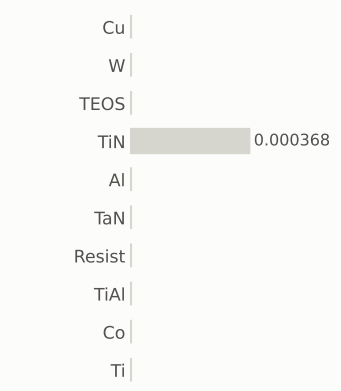

gases emitted (g)

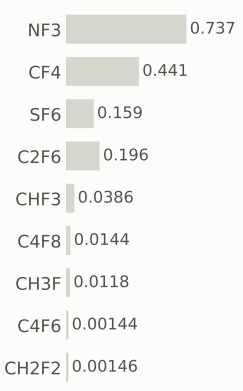

Step #3710: Wet_etch

etch_isotropic · Wet_etch

0.169	173.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

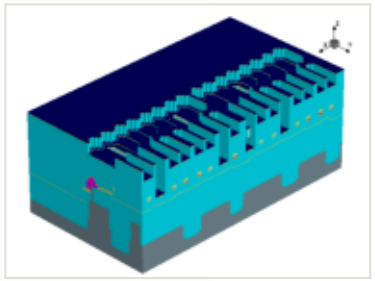

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

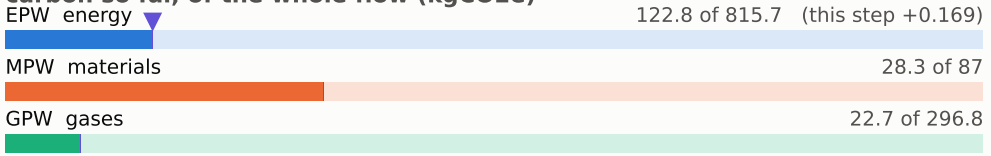

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

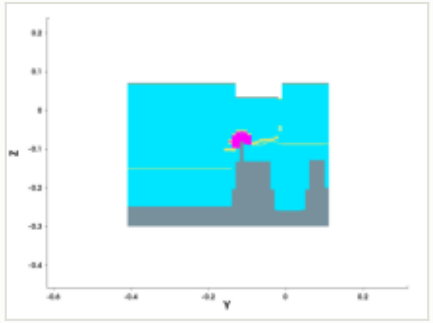

y cut at -0.150 µm

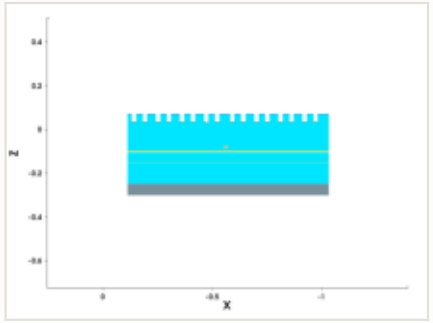

mask for this step

no mask for this step

steps by process area

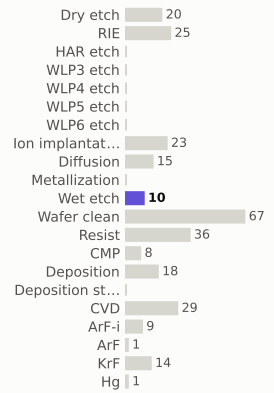

materials deposited (g)

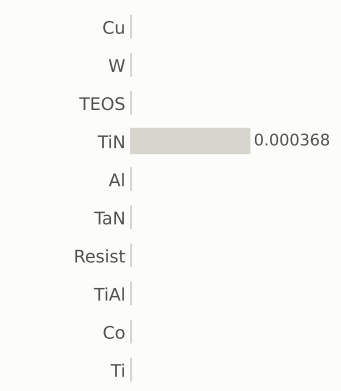

gases emitted (g)

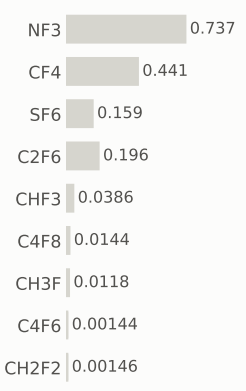

Step #3720: Spx_only

depo_isotropic · Spx_only

1.62e-05	173.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

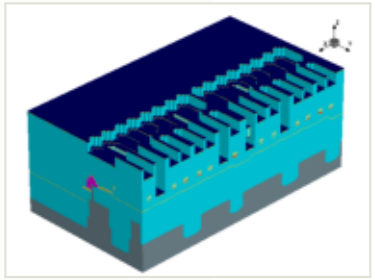

this step

process area	Spx_only
material	TiN
thickness	0.001 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	1.62e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.62e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

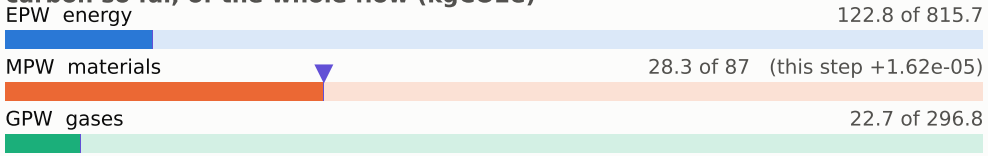

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

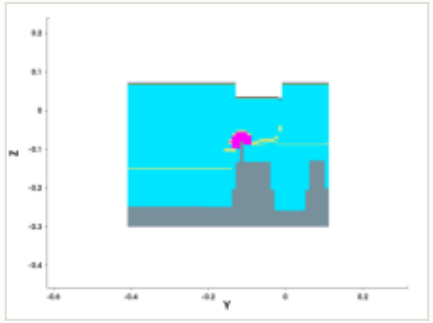

y cut at -0.150 µm

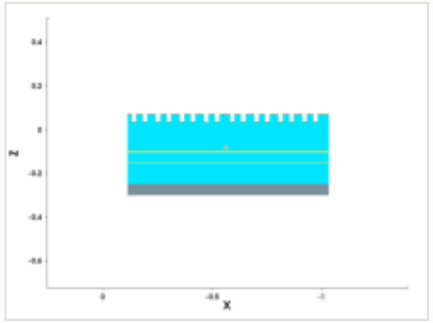

mask for this step

no mask for this step

steps by process area

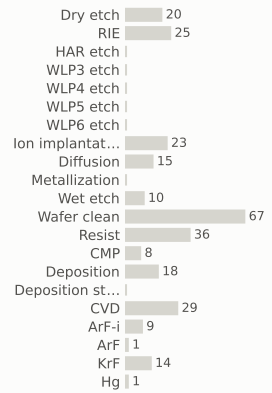

materials deposited (g)

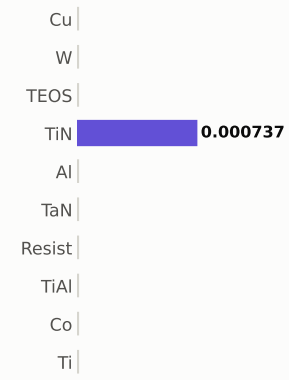

gases emitted (g)

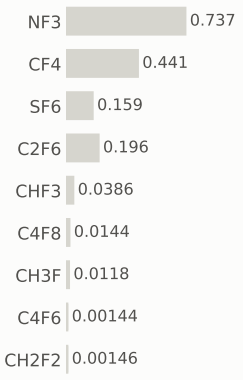

Step #3730: Wafer_clean

clean · Wafer_clean

0.169	174.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

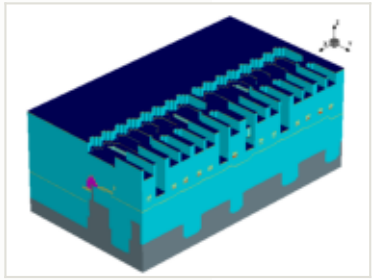

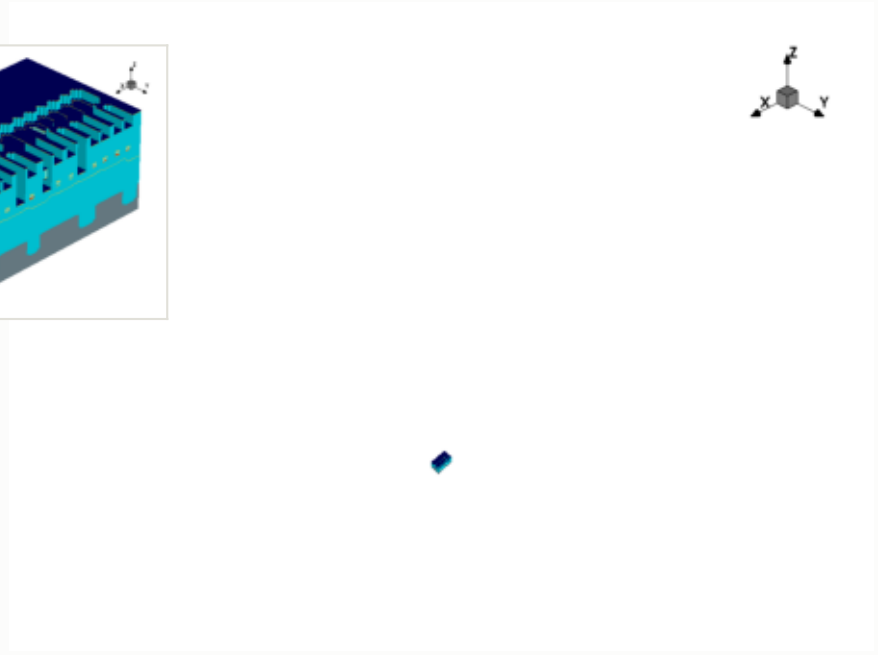

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

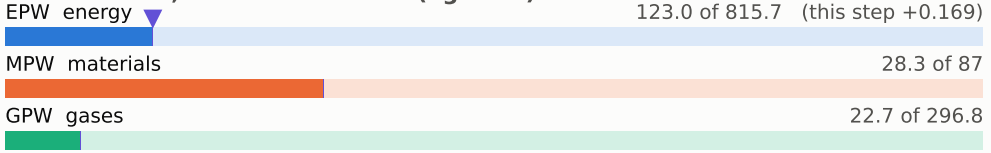

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

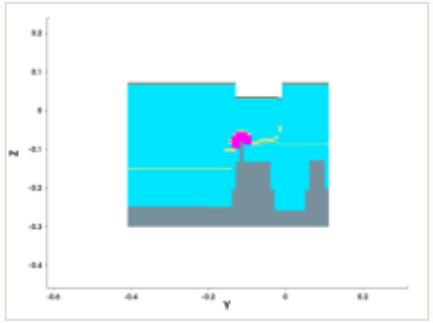

y cut at -0.150 µm

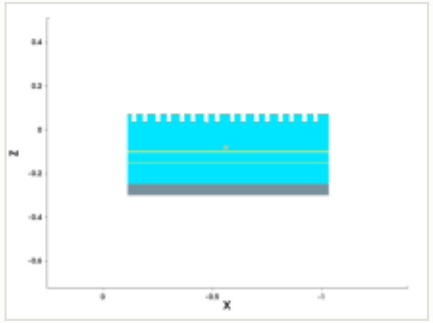

mask for this step

no mask for this step

steps by process area

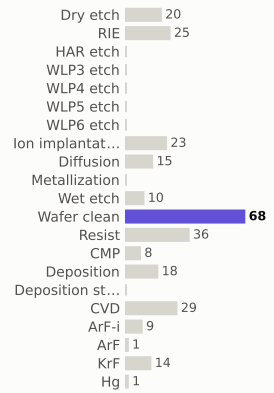

materials deposited (g)



gases emitted (g)

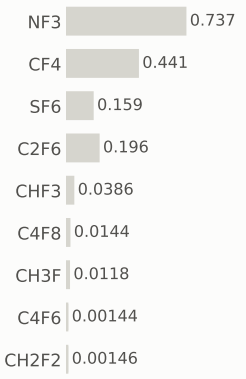

Step #3740: Deposition

depo_isotropic · Deposition

0.656	174.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

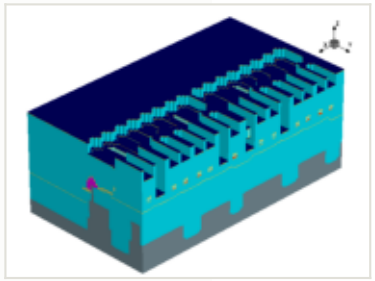

this step

process area	Deposition
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

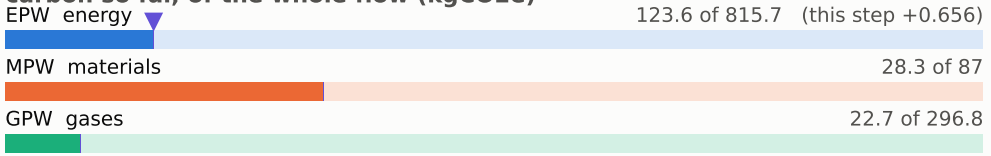

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

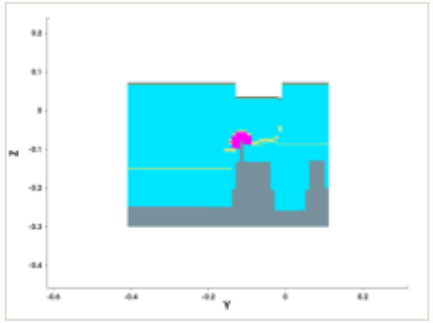

y cut at -0.150 µm

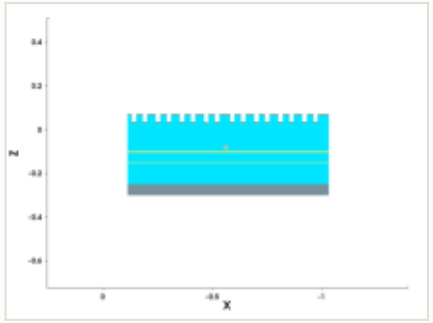

mask for this step

no mask for this step

steps by process area

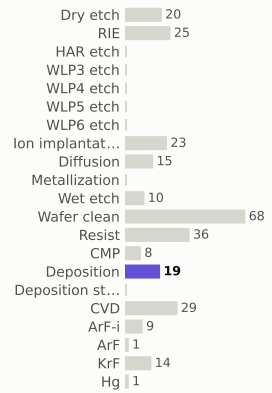

materials deposited (g)

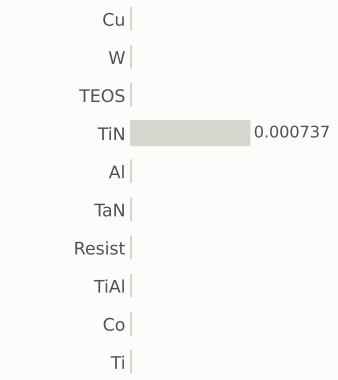

gases emitted (g)

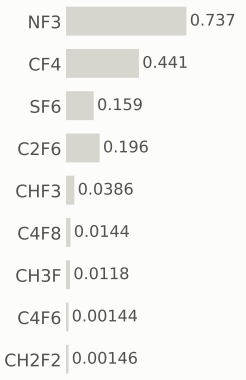

Step #3750: Wafer_clean

clean · Wafer_clean

0.169	174.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

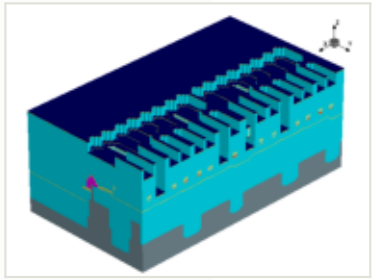

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

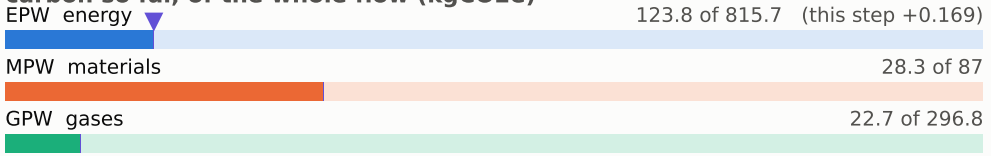

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

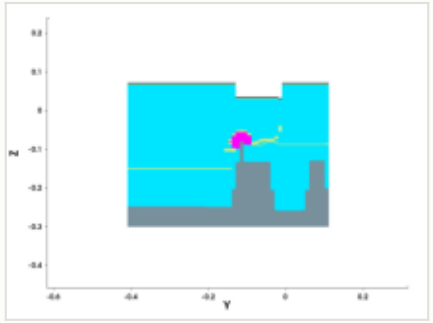

y cut at -0.150 µm

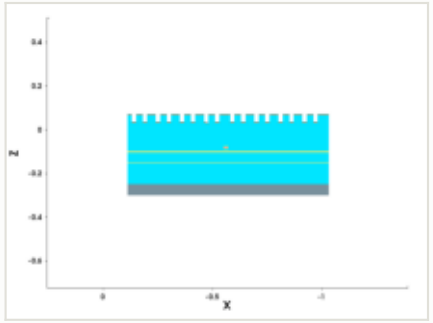

mask for this step

no mask for this step

steps by process area

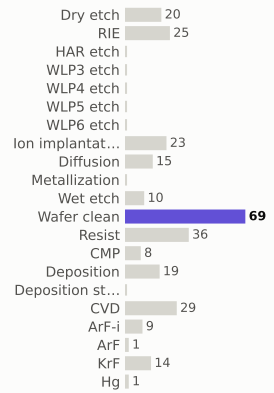

materials deposited (g)

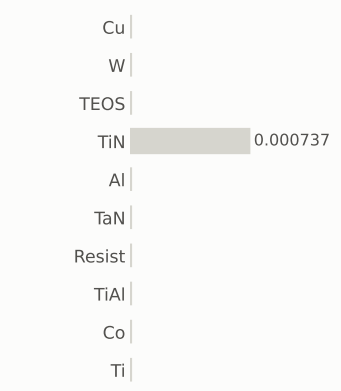

gases emitted (g)

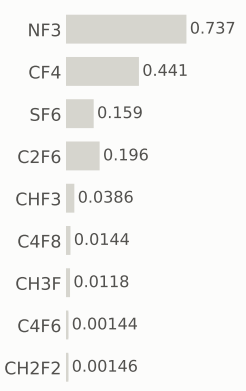

Step #3760: Deposition

depo_isotropic · Deposition

0.656	175.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

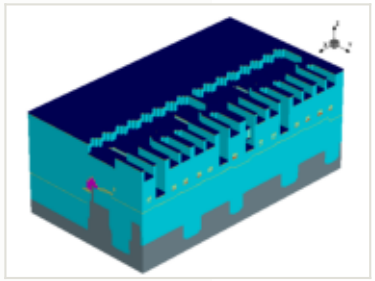

this step

process area	Deposition
material	TiN
thickness	0.003 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	4.86e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

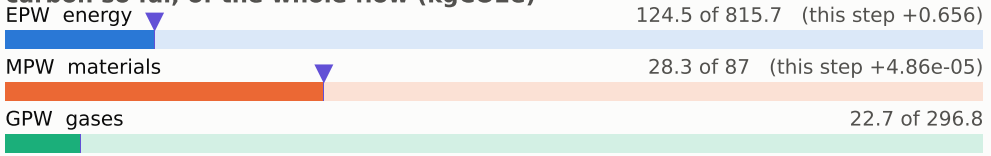

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

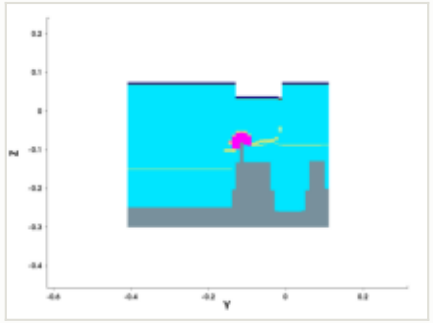

y cut at -0.150 µm

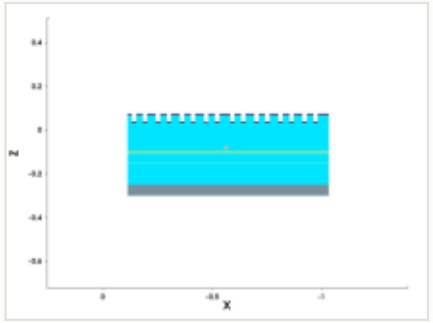

mask for this step

no mask for this step

steps by process area

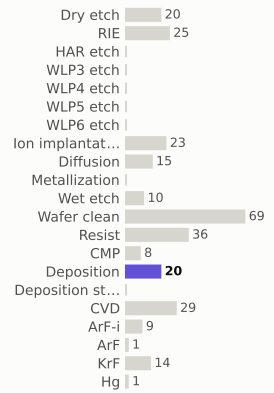

materials deposited (g)

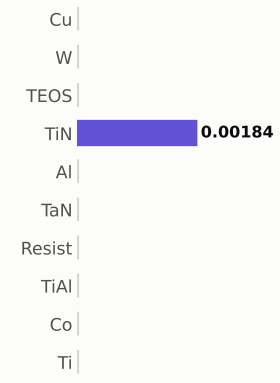

gases emitted (g)

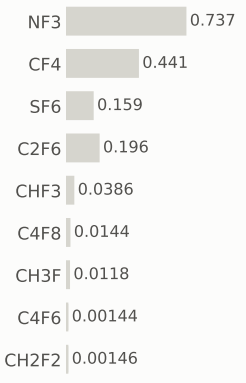

Step #3770: Spx_only

depo_fill · Spx_only

4.32e-05	175.5	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

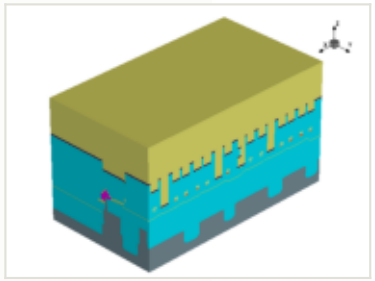

this step

process area	Spx_only
material	Resist
thickness	0.15 µm
material GWP	4.2 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	4.32e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**4.32e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

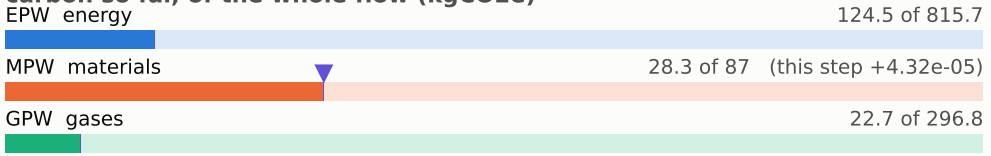

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

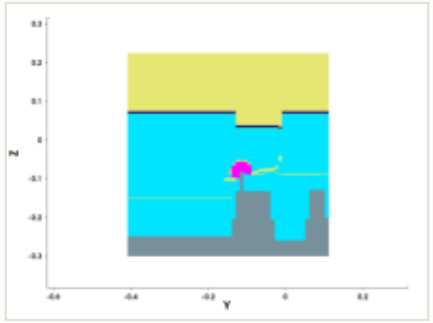

y cut at -0.150 µm

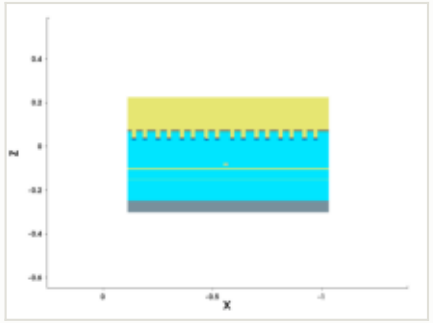

mask for this step

no mask for this step

steps by process area

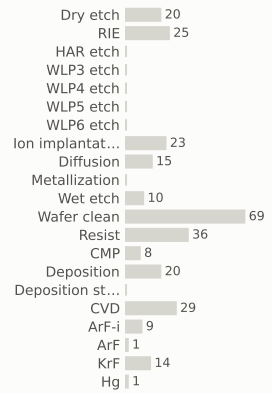

materials deposited (g)

gases emitted (g)

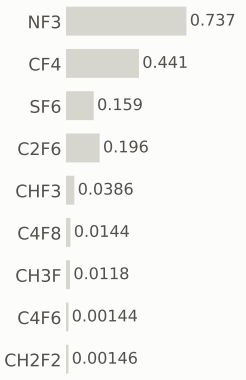

Step #3780: Wafer_clean

clean · Wafer_clean

0.169	175.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

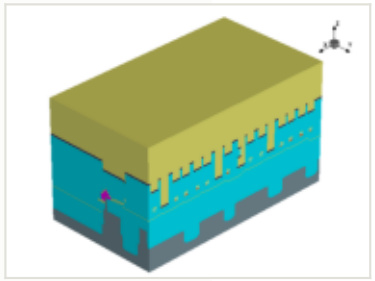

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

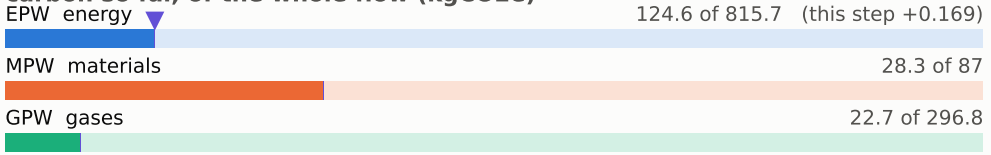

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

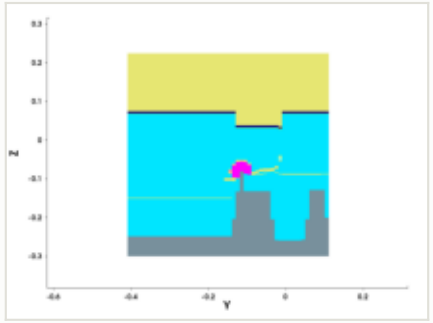

y cut at -0.150 µm

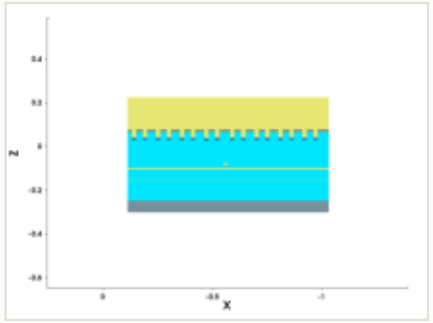

mask for this step

no mask for this step

steps by process area

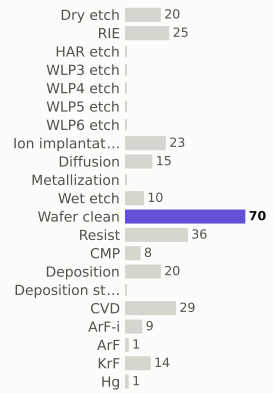

materials deposited (g)

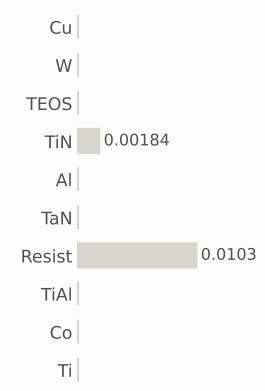

gases emitted (g)

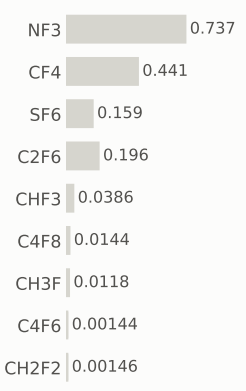

Step #3790: Resist

resist · Resist

0.169	175.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

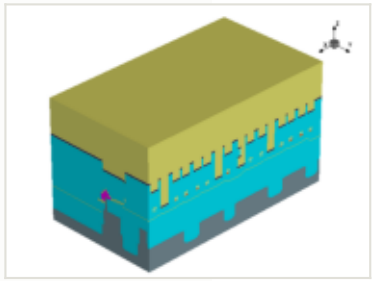

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

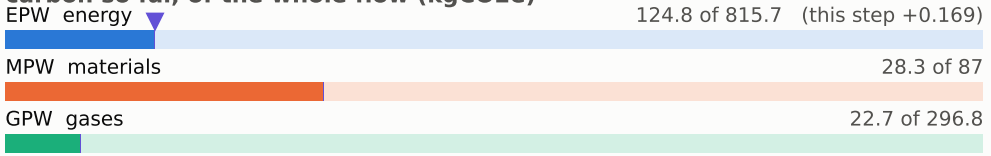

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

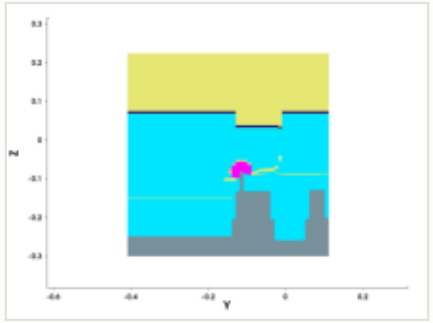

y cut at -0.150 µm

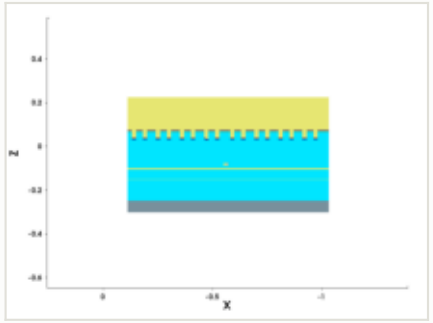

mask for this step

no mask for this step

steps by process area

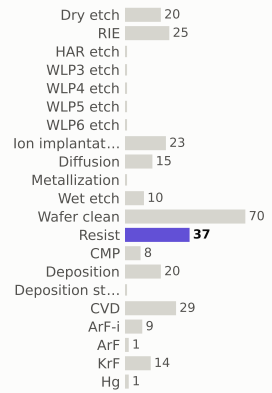

materials deposited (g)



gases emitted (g)

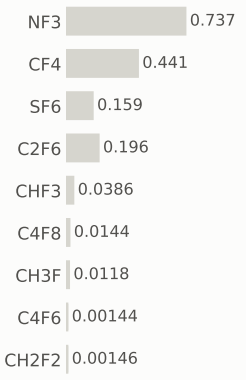

Step #3800: KrF

litho_patterning · KrF

0.199	176.0	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

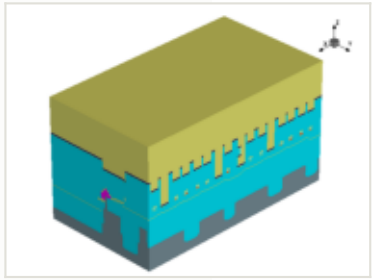

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

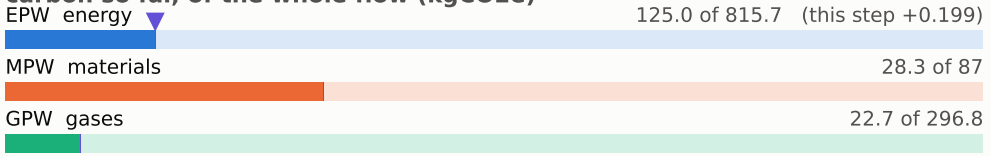

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

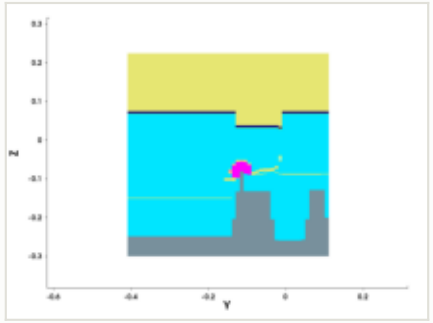

y cut at -0.150 µm

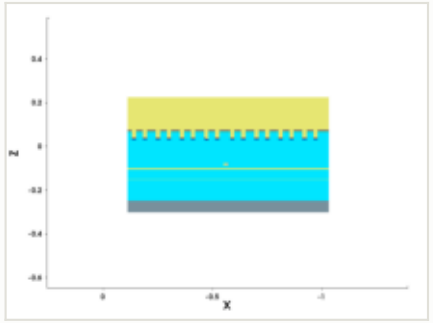

mask for this step

no mask for this step

steps by process area

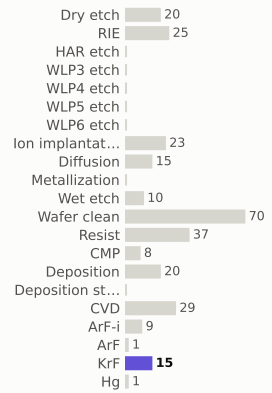

materials deposited (g)

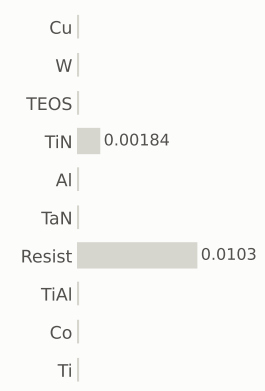

gases emitted (g)

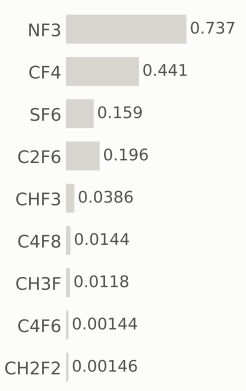

Step #3810: RIE

etch_ellipsoidal · RIE

1.04	177.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

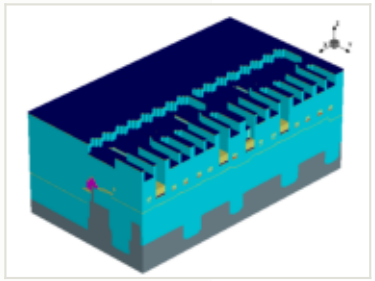

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

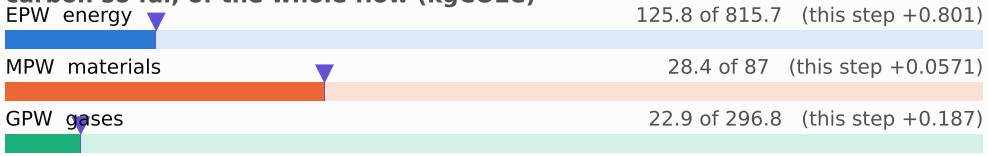

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

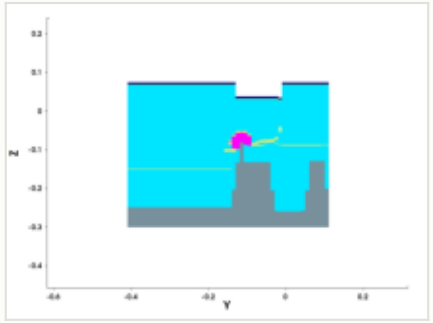

y cut at -0.150 µm

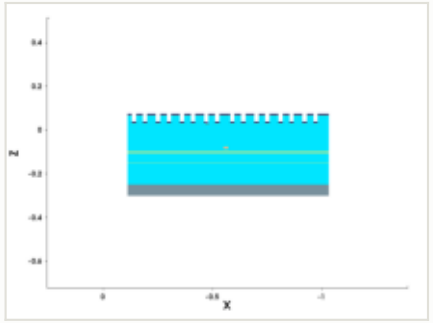

mask for this step

no mask for this step

steps by process area

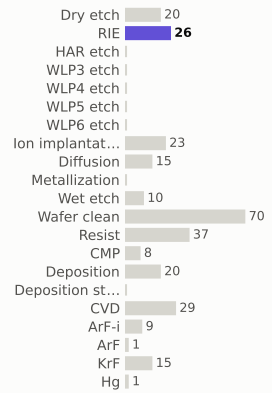

materials deposited (g)



gases emitted (g)

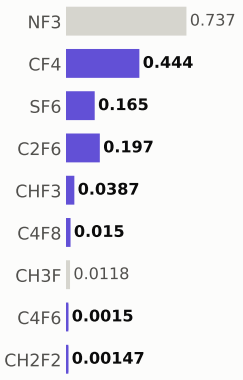

Step #3820: Dry_etch

treatment · Dry_etch

0.801	177.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

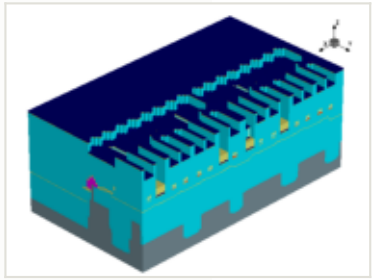

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

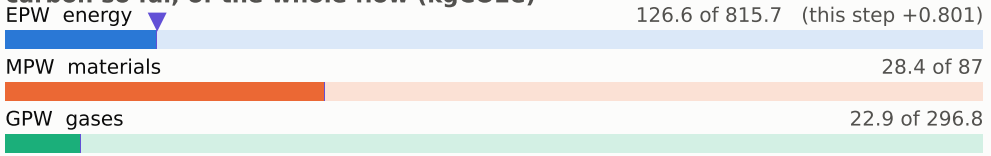

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

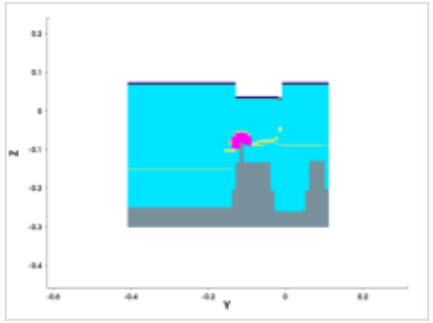

y cut at -0.150 µm

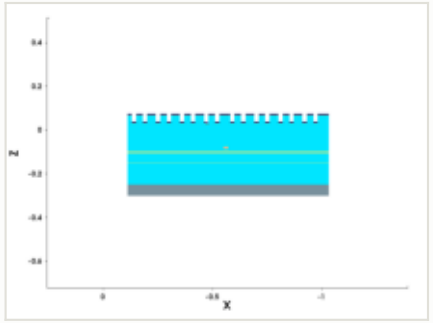

mask for this step

no mask for this step

steps by process area

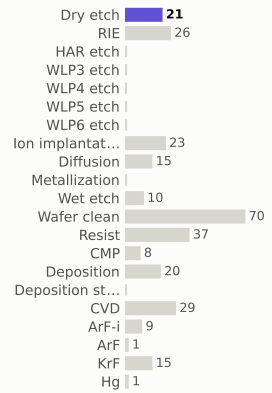

materials deposited (g)

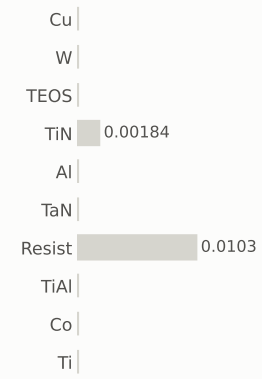

gases emitted (g)

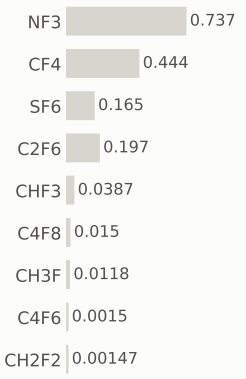

Step #3830: Wet_etch

etch_isotropic · Wet_etch

0.169	178.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

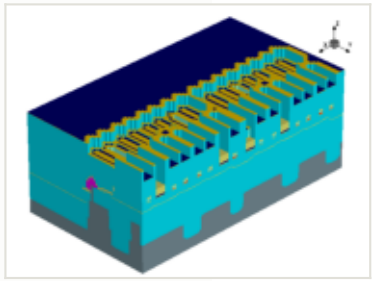

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

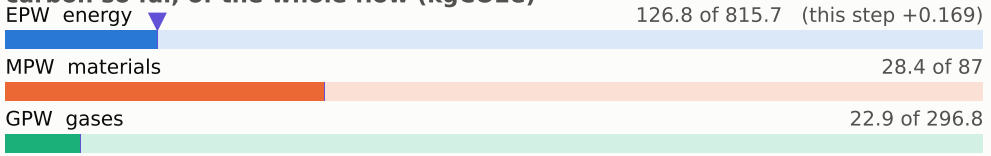

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

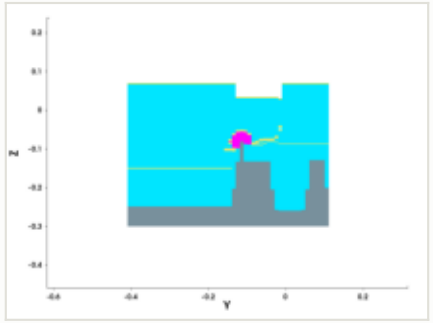

y cut at -0.150 µm

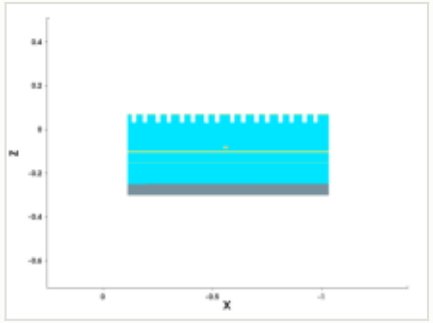

mask for this step

no mask for this step

steps by process area

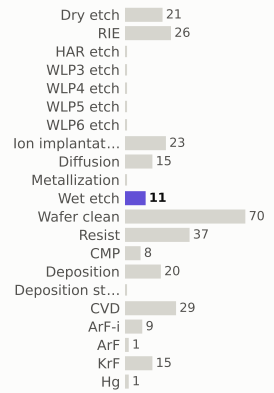

materials deposited (g)

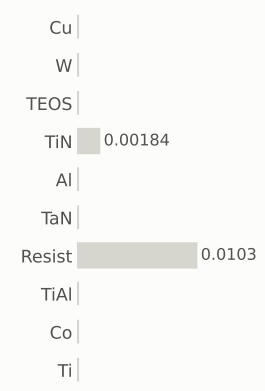

gases emitted (g)

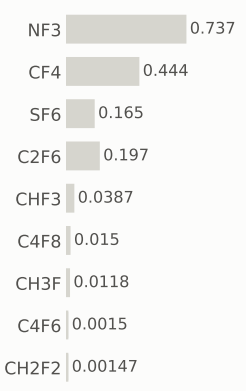

Step #3840: Dry_etch

etch_strip · Dry_etch

0.801	178.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

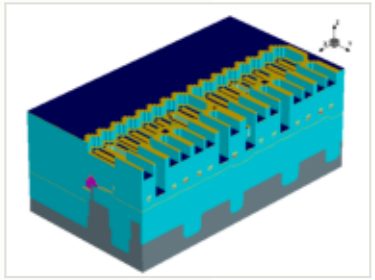

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

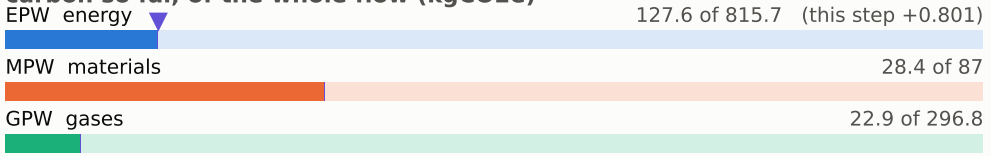

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

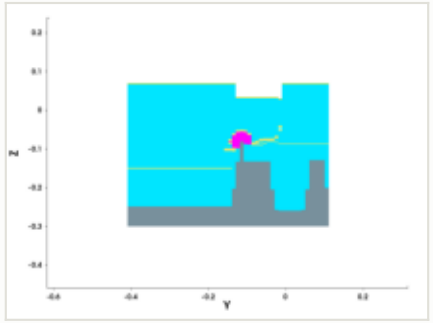

y cut at -0.150 µm

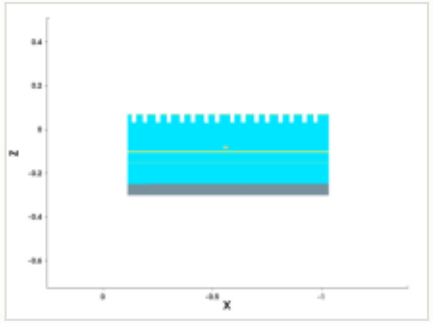

mask for this step

no mask for this step

steps by process area

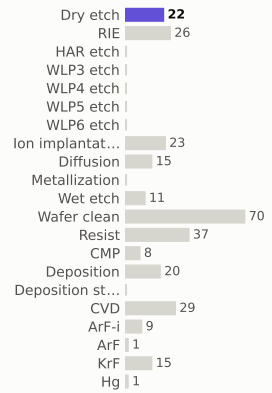

materials deposited (g)

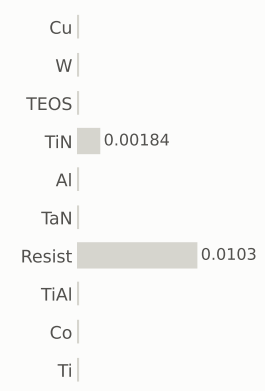

gases emitted (g)

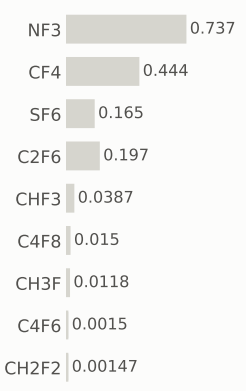

Step #3850: Spx_only

depo_fill · Spx_only

2.59e-05	178.8	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

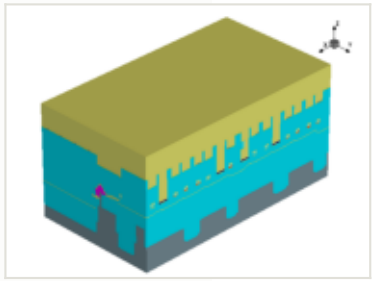

this step

process area	Spx_only
material	Resist
thickness	0.09 µm
material GWP	4.2 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	2.59e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**2.59e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

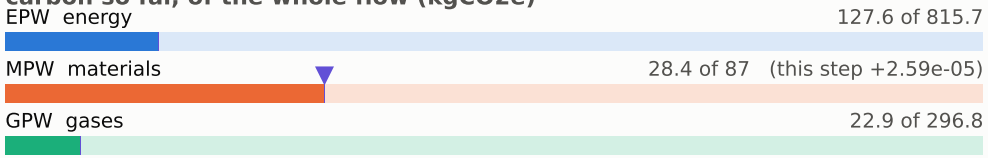

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

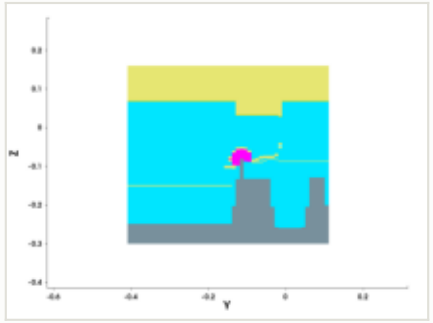

y cut at -0.150 µm

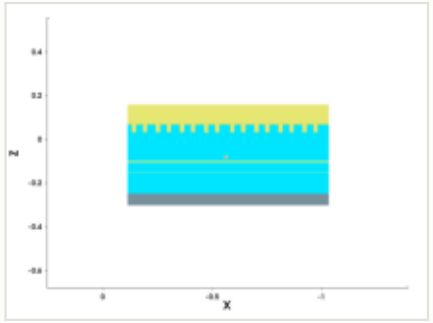

mask for this step

no mask for this step

steps by process area

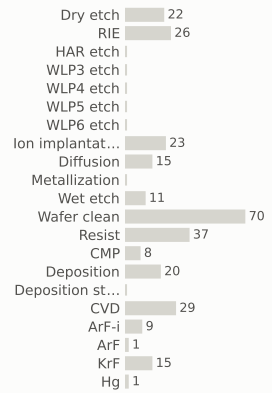

materials deposited (g)

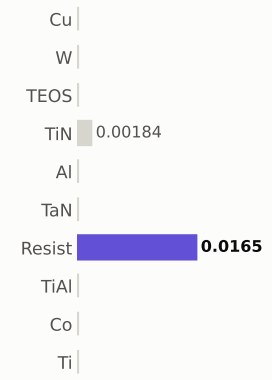

gases emitted (g)

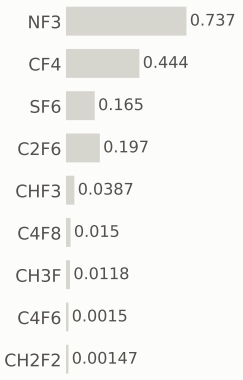

Step #3860: Resist

resist · Resist

0.169	179.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

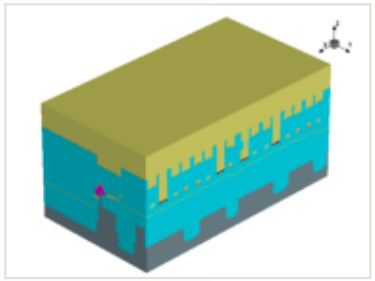

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

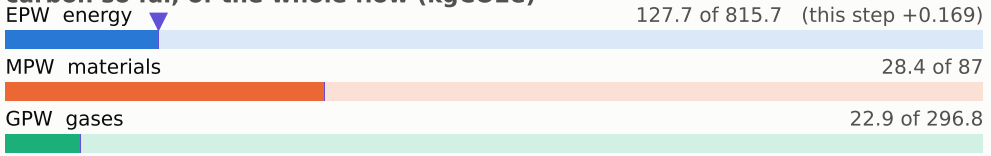

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

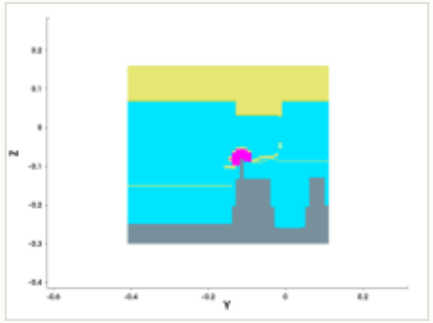

y cut at -0.150 µm

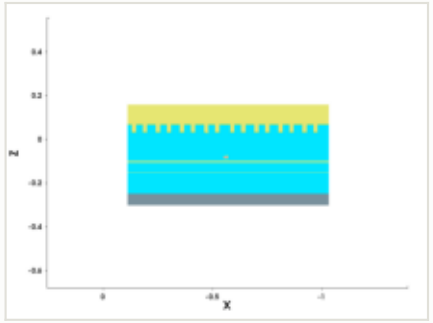

mask for this step

no mask for this step

steps by process area

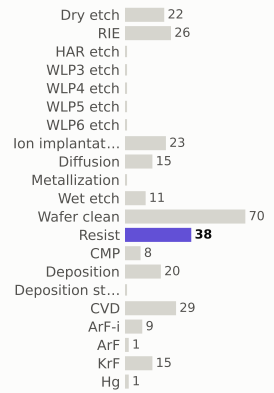

materials deposited (g)

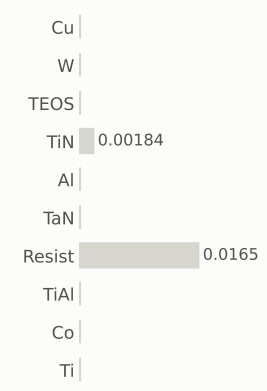

gases emitted (g)

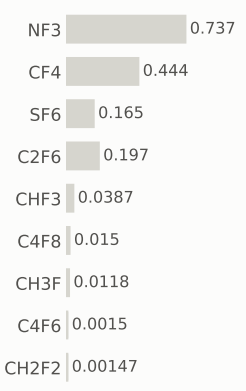

Step #3870: KrF

litho_patterning · KrF

0.199	179.2	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

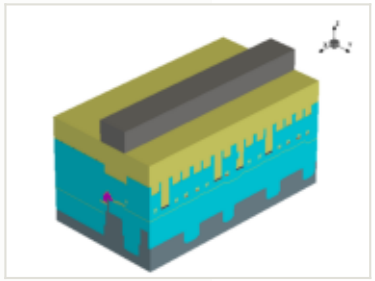

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

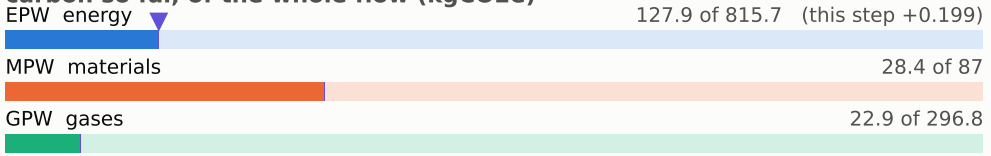

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

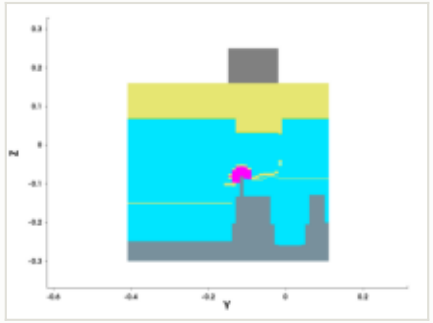

y cut at -0.150 µm

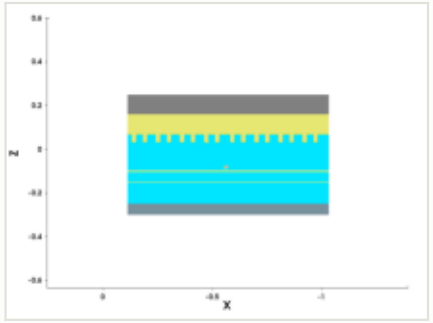

mask: layer 2012:0, positive (GDSII)

steps by process area

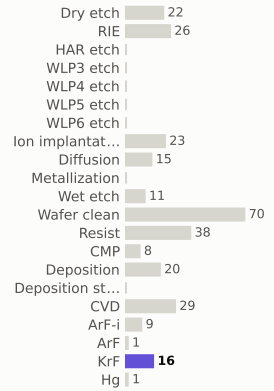

materials deposited (g)

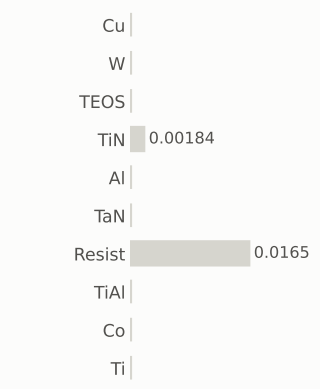

gases emitted (g)

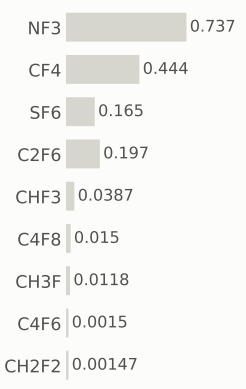

Step #3880: RIE

etch_ellipsoidal · RIE

1.04	180.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

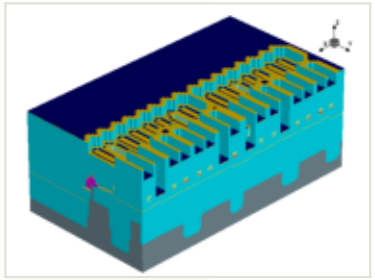

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

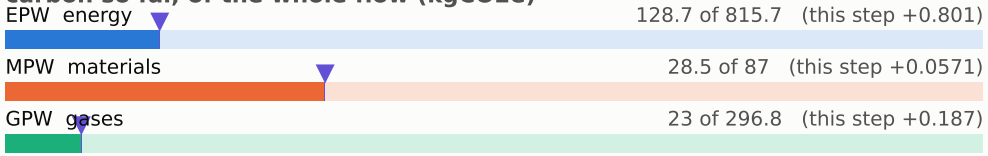

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

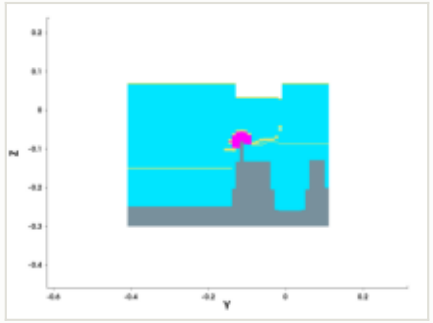

y cut at -0.150 µm

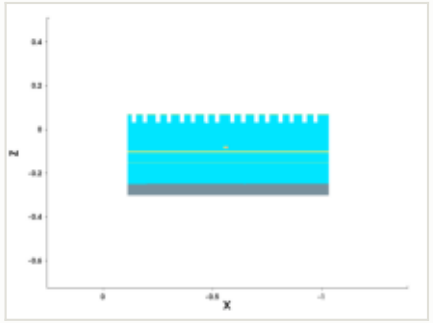

mask for this step

no mask for this step

steps by process area

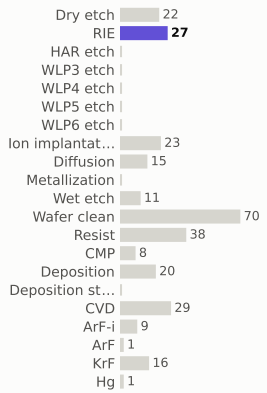

materials deposited (g)



gases emitted (g)

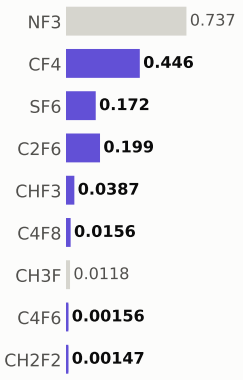

Step #3890: Wet_etch

etch_ellipsoidal · Wet_etch

0.169	180.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

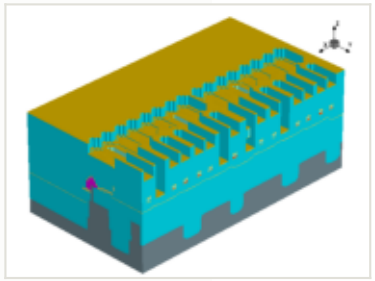

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

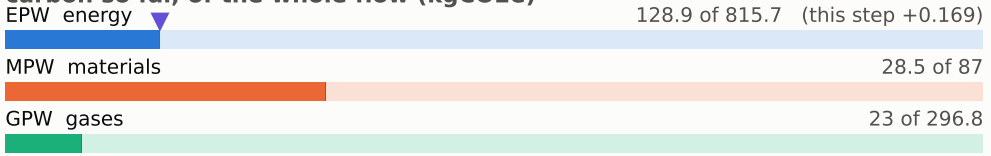

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

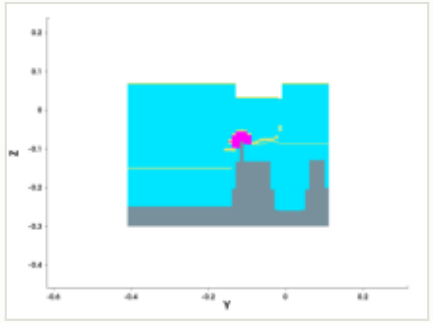

y cut at -0.150 µm

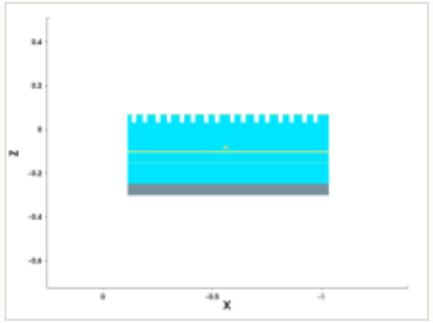

mask for this step

no mask for this step

steps by process area

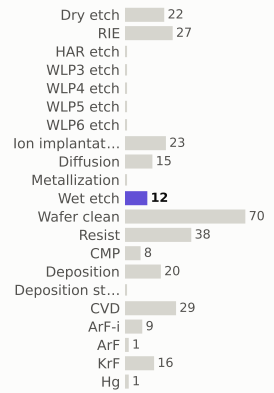

materials deposited (g)



gases emitted (g)

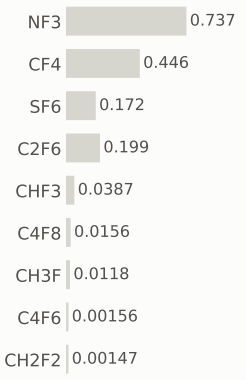

Step #3900: Dry_etch

etch_strip · Dry_etch

0.801	181.2	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

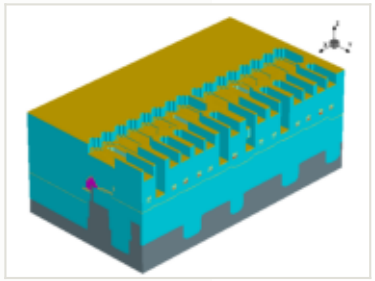

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

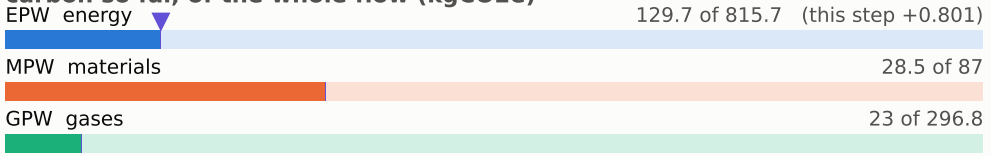

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

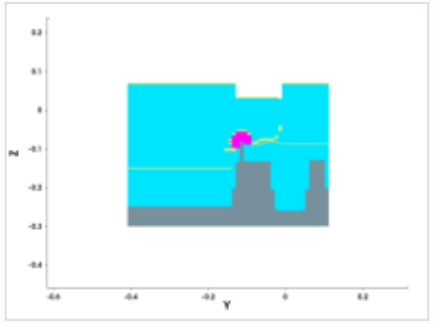

y cut at -0.150 µm

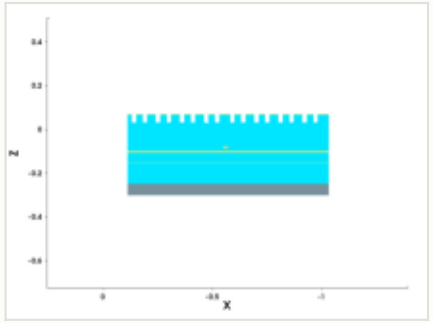

mask for this step

no mask for this step

steps by process area

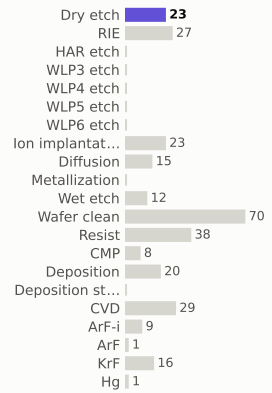

materials deposited (g)

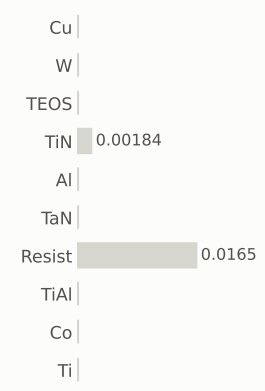

gases emitted (g)

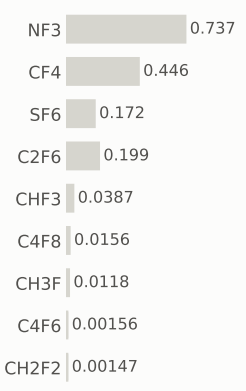

Step #3910: Wafer_clean

clean · Wafer_clean

0.169	181.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

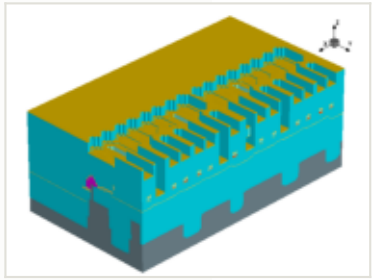

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

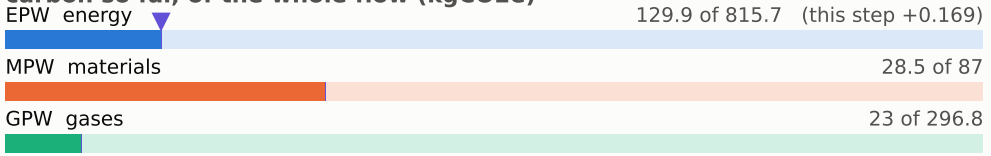

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

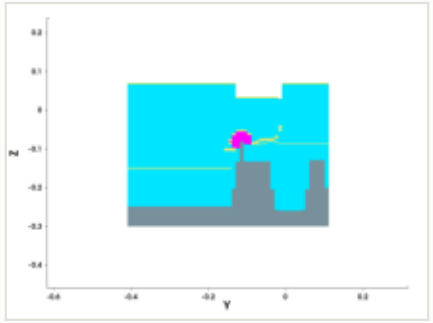

y cut at -0.150 µm

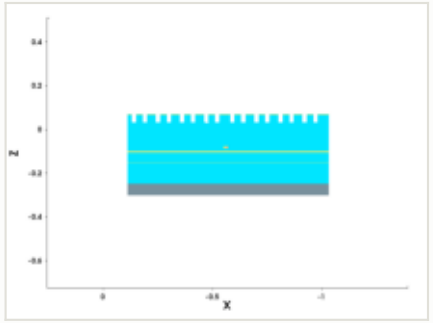

mask for this step

no mask for this step

steps by process area

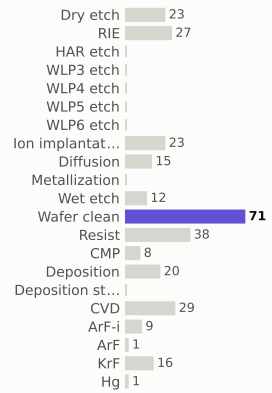

materials deposited (g)



gases emitted (g)

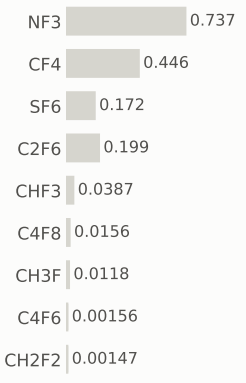

Step #3920: Deposition

depo_isotropic · Deposition

0.656	182.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

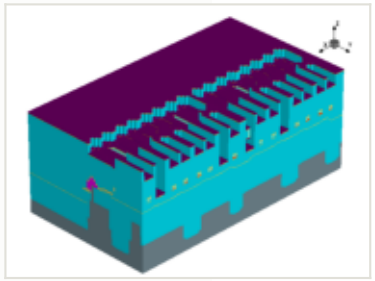

this step

process area	Deposition
material	—
thickness	0.004 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

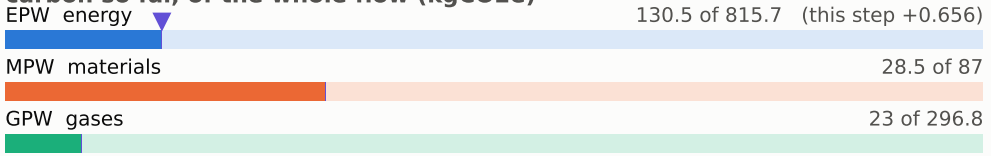

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

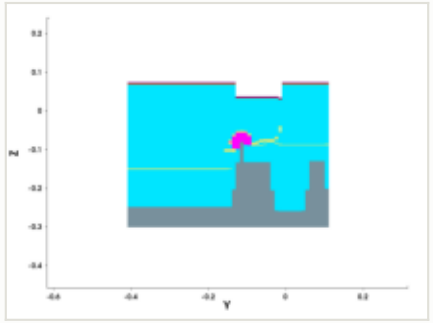

y cut at -0.150 µm

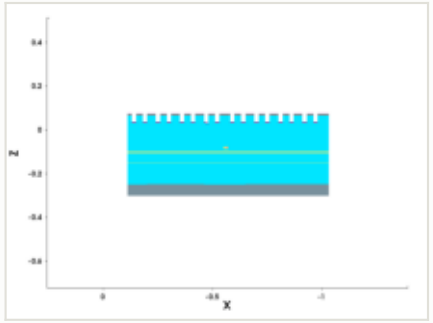

mask for this step

no mask for this step

steps by process area

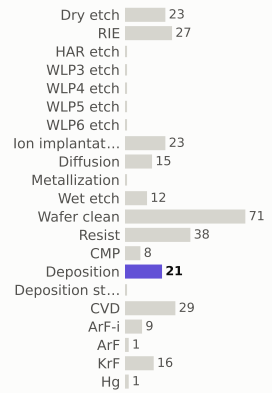

materials deposited (g)



gases emitted (g)

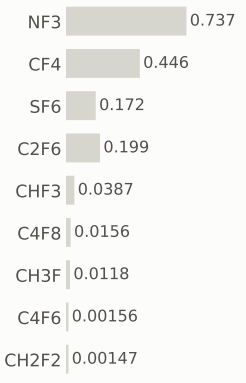

Step #3930: Deposition

depo_isotropic · Deposition

0.656	182.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

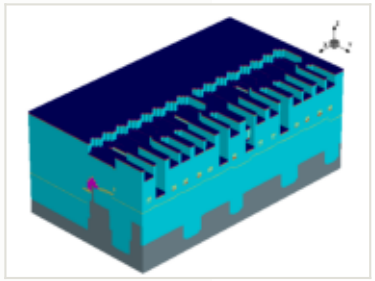

this step

process area	Deposition
material	TiN
thickness	0.003 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	4.86e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

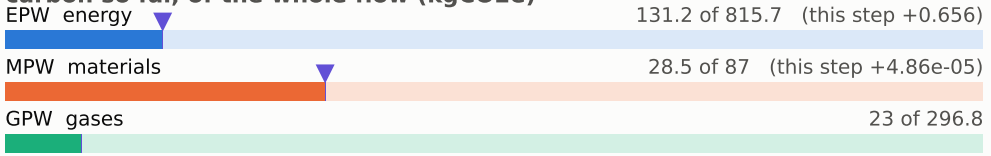

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

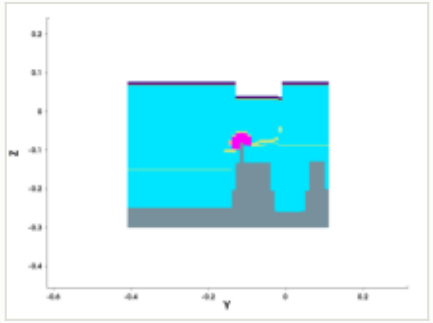

y cut at -0.150 µm

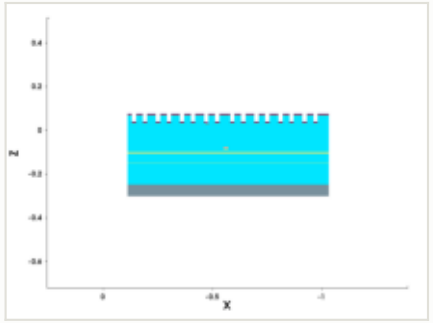

mask for this step

no mask for this step

steps by process area

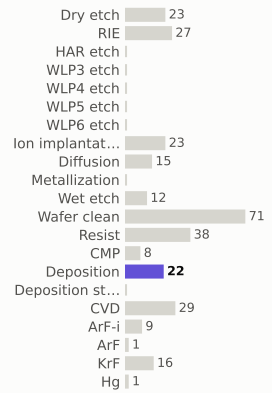

materials deposited (g)



gases emitted (g)

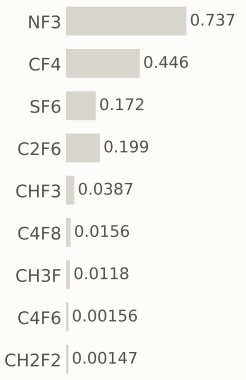

Step #3940: Wafer_clean

clean · Wafer_clean

0.169	182.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

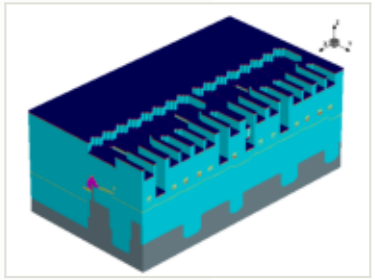

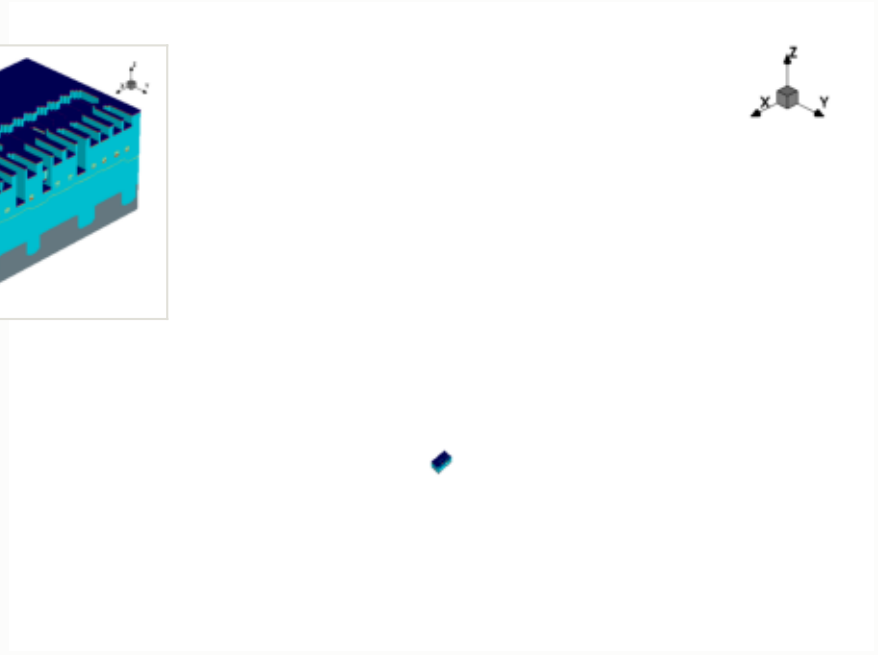

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

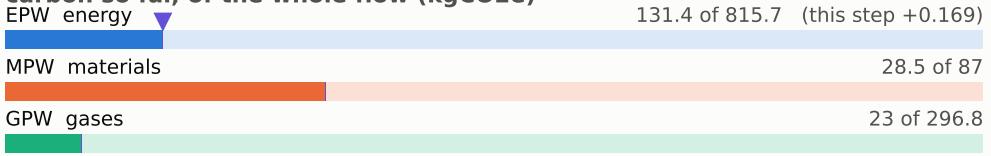

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

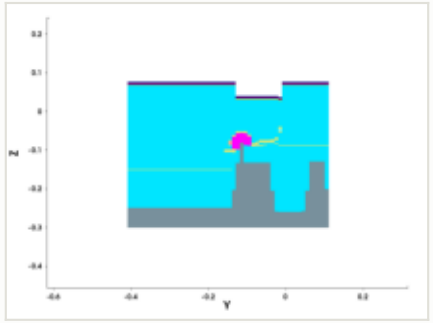

y cut at -0.150 µm

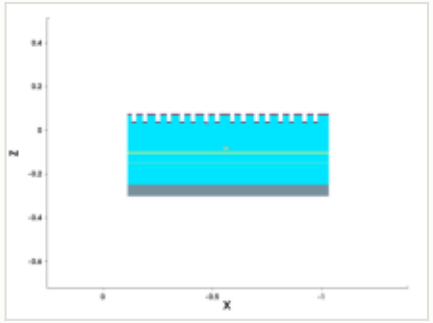

mask for this step

no mask for this step

steps by process area

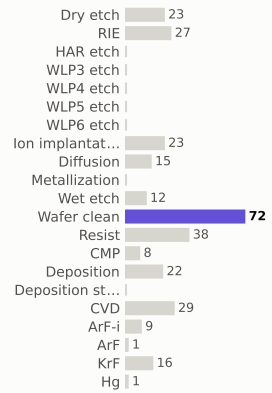

materials deposited (g)



gases emitted (g)

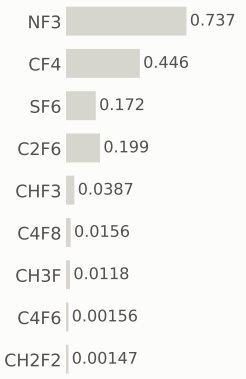

Step #3950: Metallization

depo_fill · Metallization

1.22	184.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

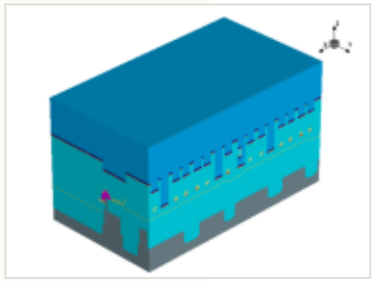

this step

process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

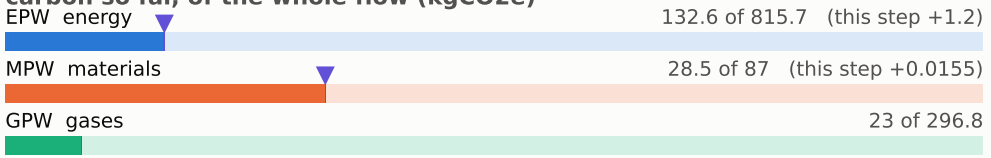

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

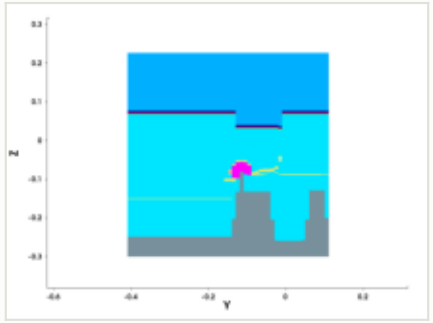

y cut at -0.150 µm

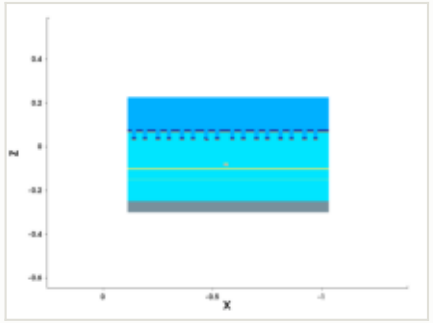

mask for this step

no mask for this step

steps by process area

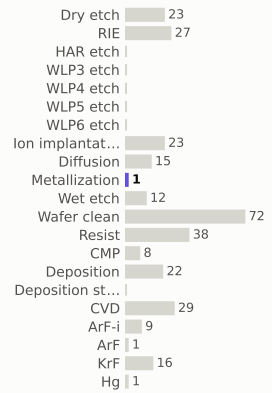

materials deposited (g)

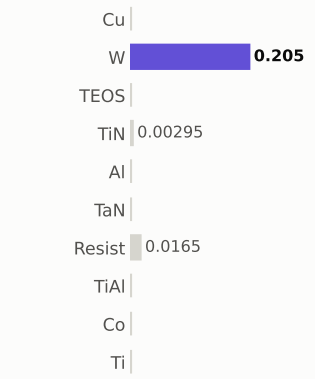

gases emitted (g)

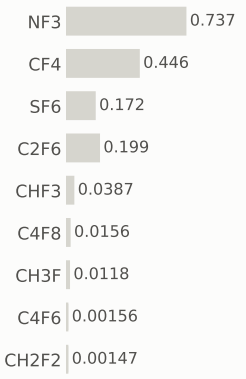

Step #3960: CMP

etch_cmp · CMP

0.169	184.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

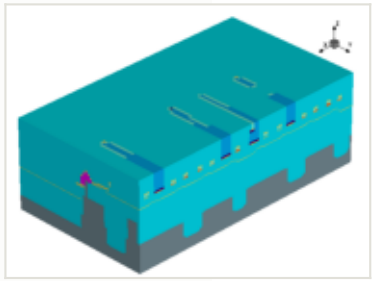

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

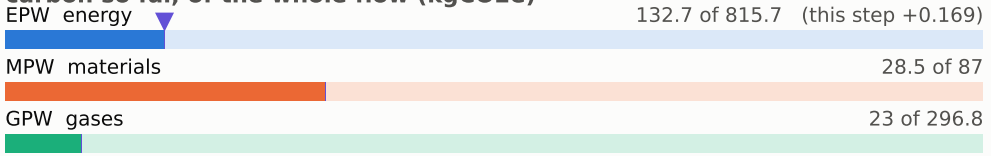

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

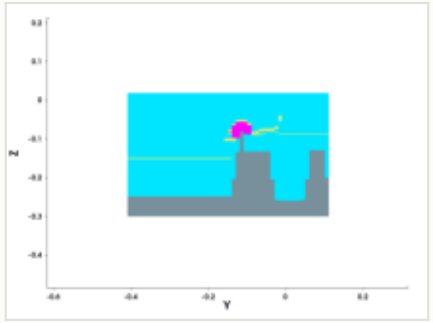

y cut at -0.150 µm

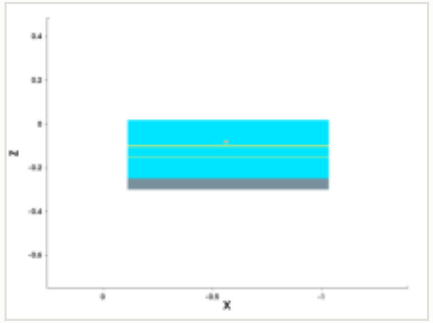

mask for this step

no mask for this step

steps by process area

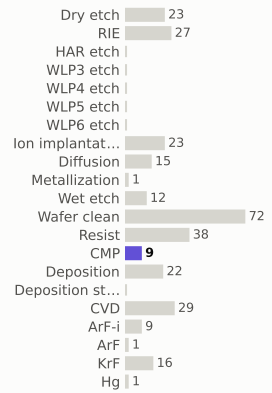

materials deposited (g)



gases emitted (g)

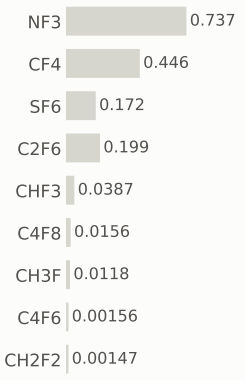

Step #3970: Dry_etch

etch_strip · Dry_etch

0.801	185.1	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

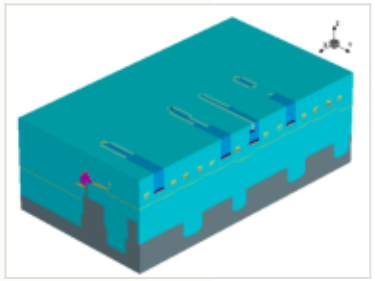

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

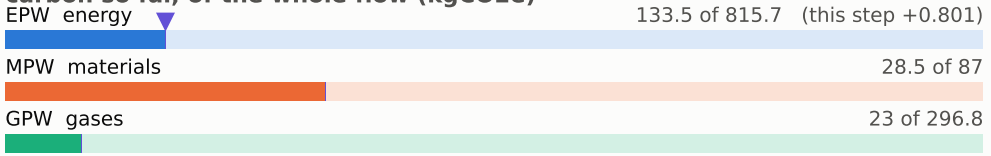

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

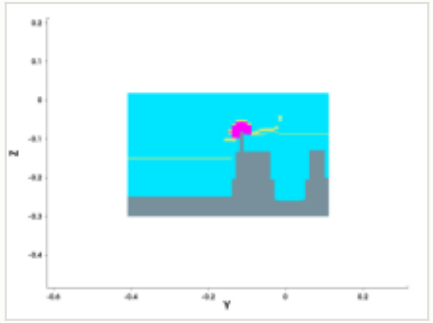

y cut at -0.150 µm

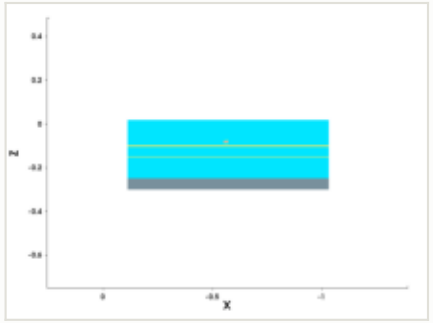

mask for this step

no mask for this step

steps by process area

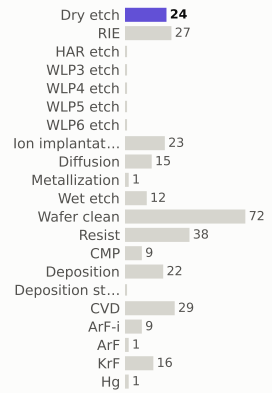

materials deposited (g)



gases emitted (g)

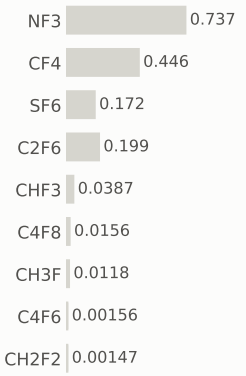

Step #3980: RIE

etch_isotropic · RIE

1.04	186.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

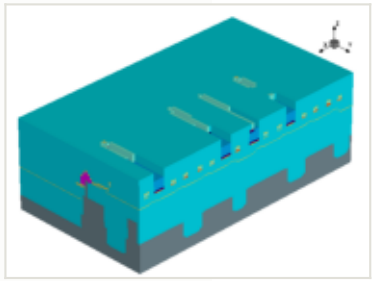

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

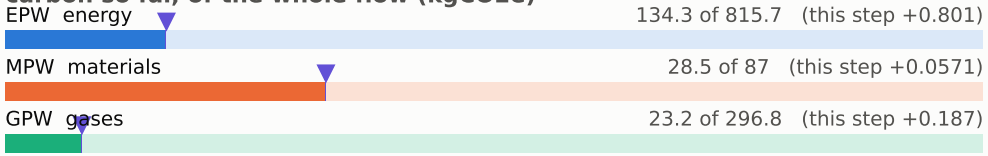

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

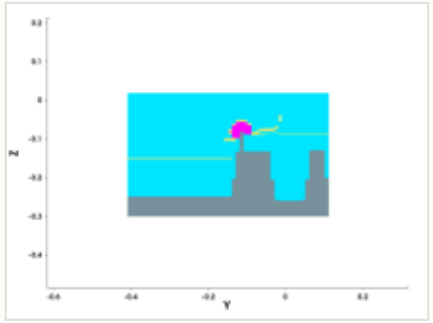

y cut at -0.150 µm

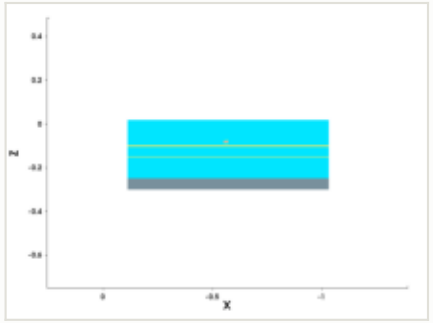

mask for this step

no mask for this step

steps by process area

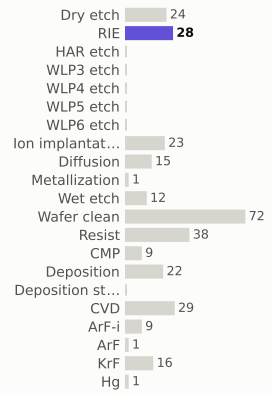

materials deposited (g)

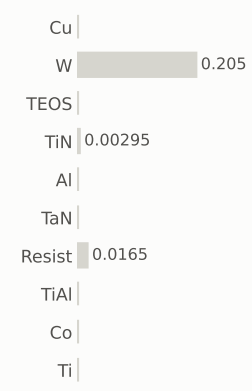

gases emitted (g)

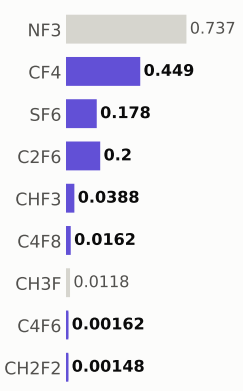

Step #3990: Dry_etch

etch_strip · Dry_etch

0.801	186.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

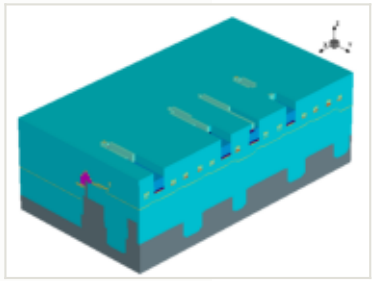

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

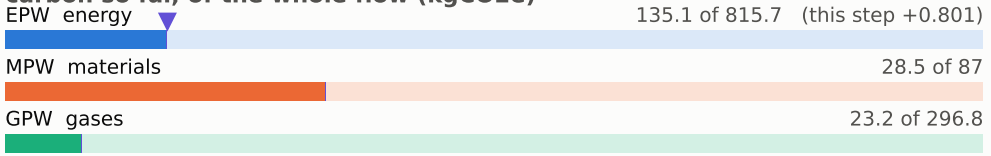

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

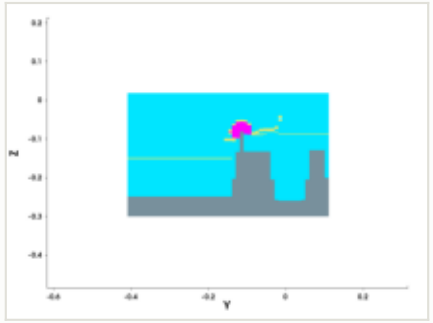

y cut at -0.150 µm

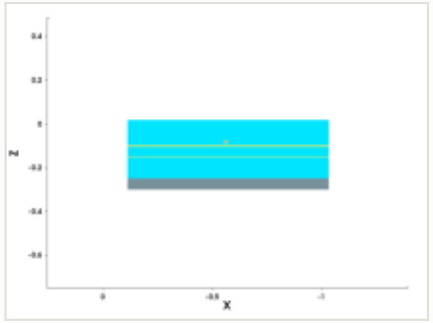

mask for this step

no mask for this step

steps by process area

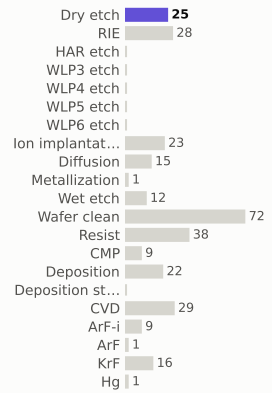

materials deposited (g)

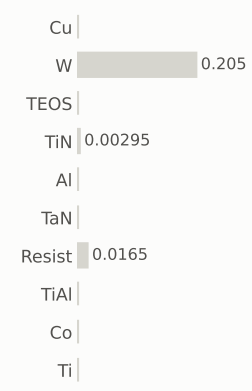

gases emitted (g)

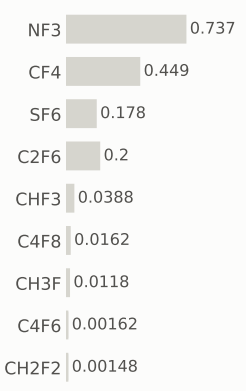

Step #4000: Wafer_clean

clean · Wafer_clean

0.169	187.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

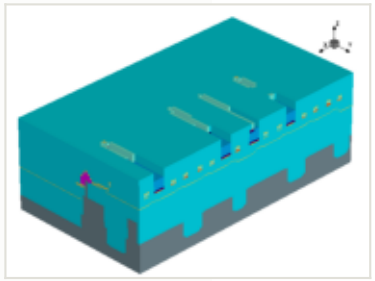

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

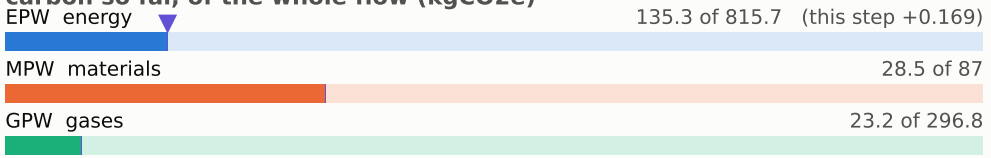

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

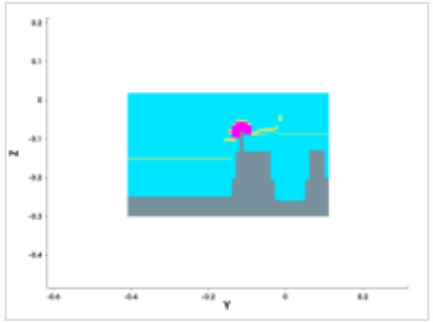

y cut at -0.150 µm

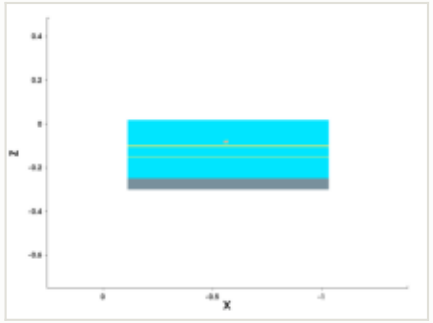

mask for this step

no mask for this step

steps by process area

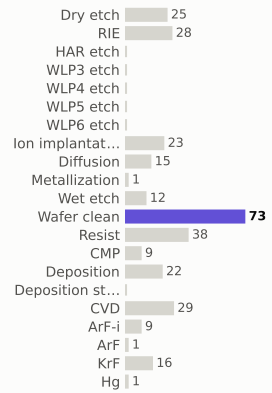

materials deposited (g)

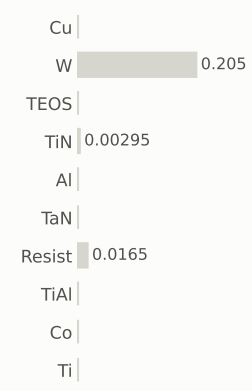

gases emitted (g)

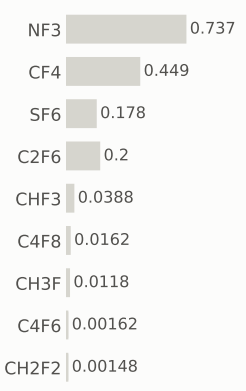

Step #4010: CVD

depo_isotropic · CVD

1.31	188.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

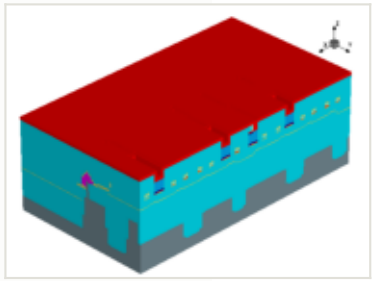

this step

process area	CVD
material	—
thickness	0.011 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

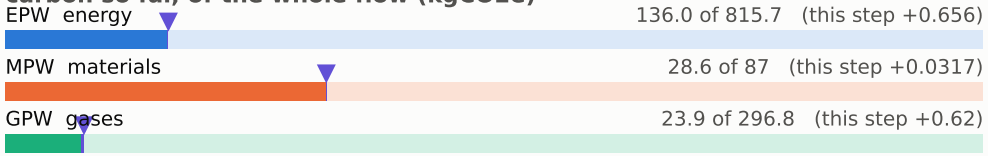

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

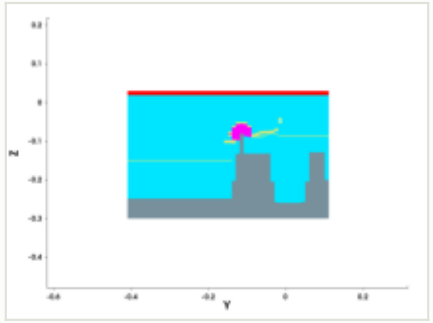

y cut at -0.150 µm

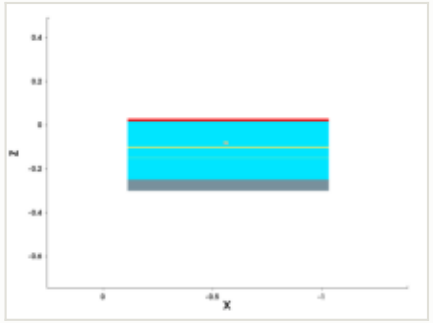

mask for this step

no mask for this step

steps by process area

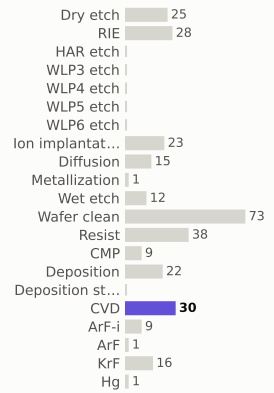

materials deposited (g)

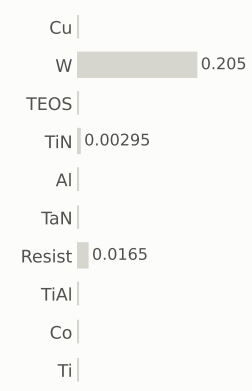

gases emitted (g)

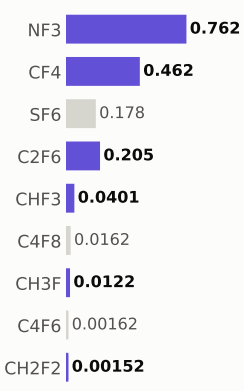

Step #4020: Wafer_clean

clean · Wafer_clean

0.169	188.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

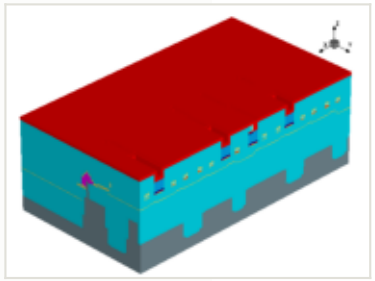

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

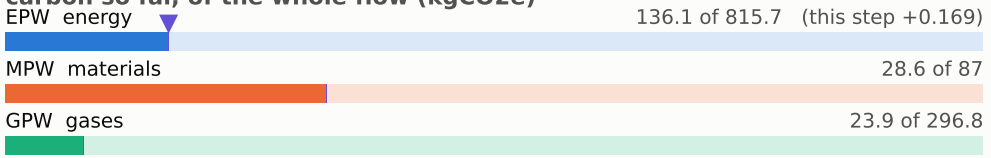

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

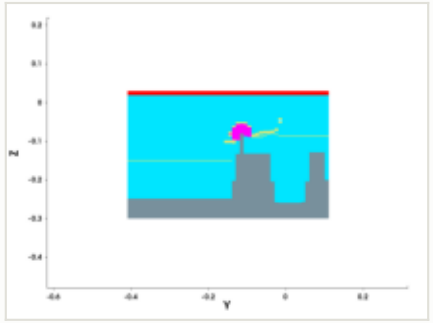

y cut at -0.150 µm

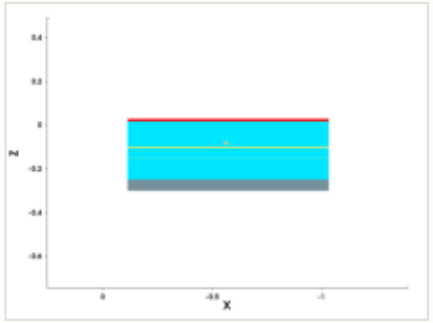

mask for this step

no mask for this step

steps by process area

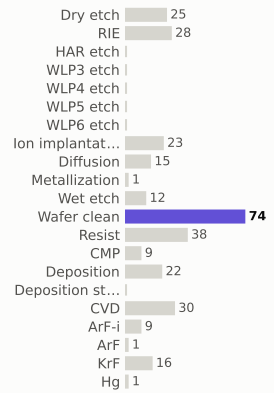

materials deposited (g)

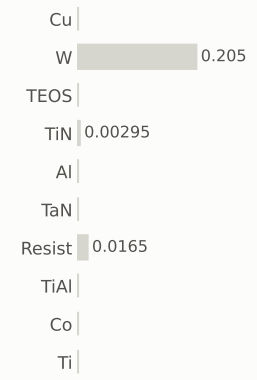

gases emitted (g)

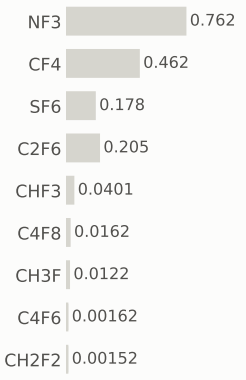

Step #4030: CMP

etch_cmp · CMP

0.169	188.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

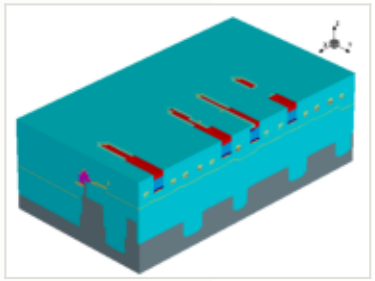

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

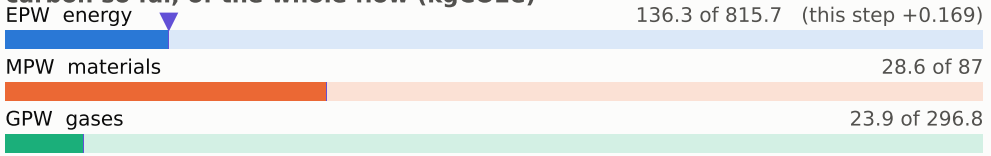

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

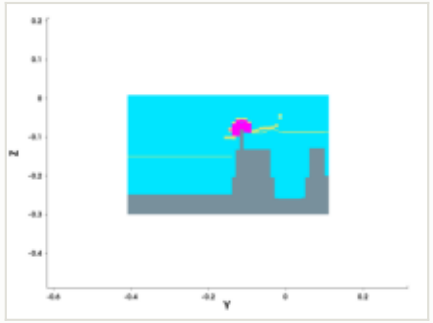

y cut at -0.150 µm

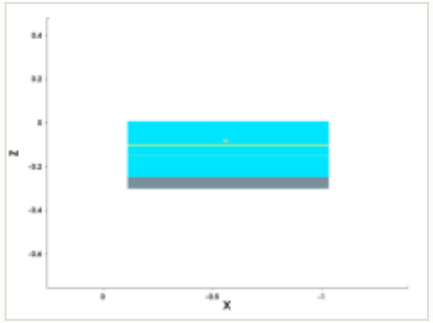

mask for this step

no mask for this step

steps by process area

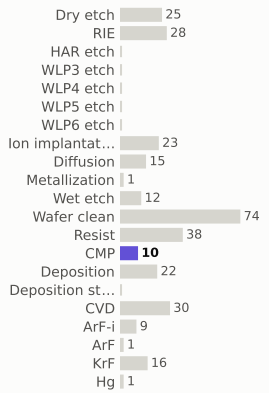

materials deposited (g)

gases emitted (g)

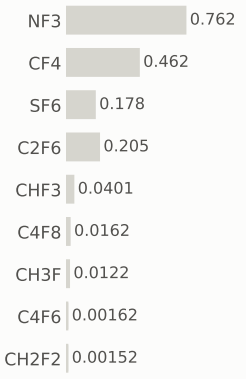

Step #4040: Wafer_clean

clean · Wafer_clean

0.169	188.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

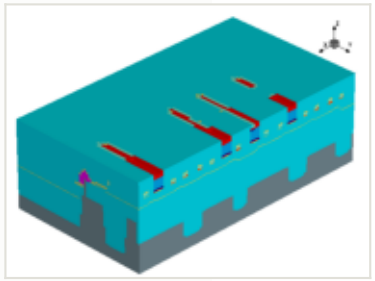

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

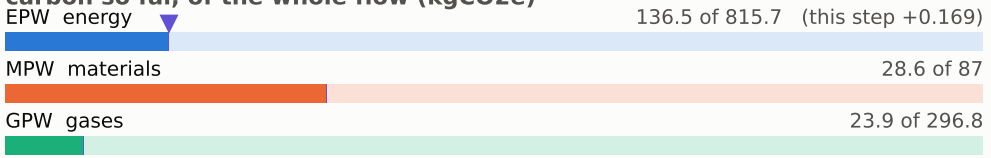

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

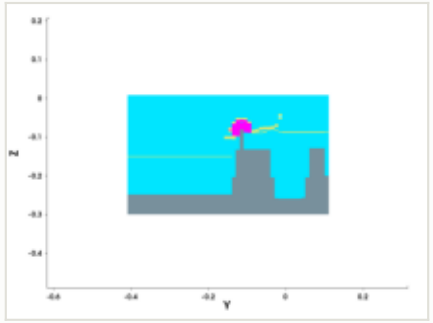

y cut at -0.150 µm

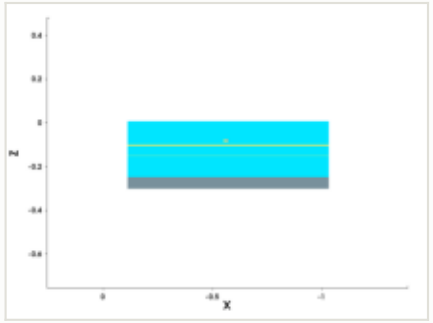

mask for this step

no mask for this step

steps by process area

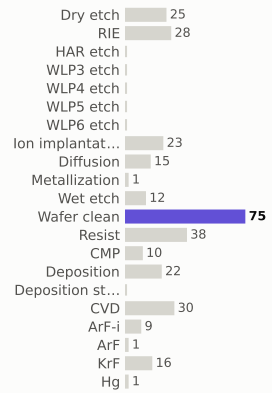

materials deposited (g)



gases emitted (g)

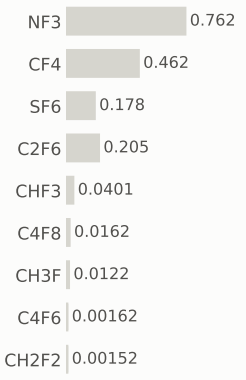

Step #4060: CVD

depo_fill · CVD

1.31	190.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

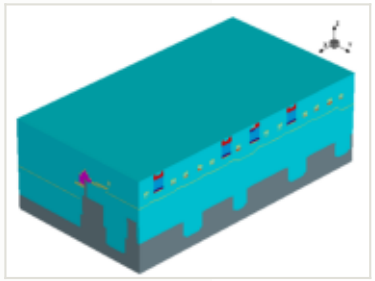

this step

process area	CVD
material	—
thickness	0.003 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

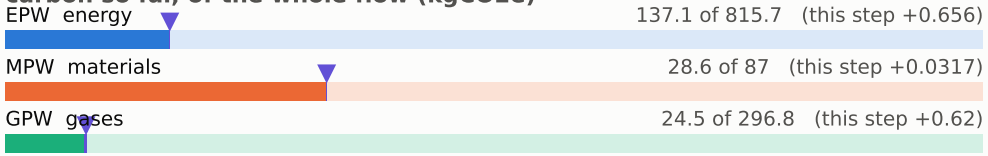

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

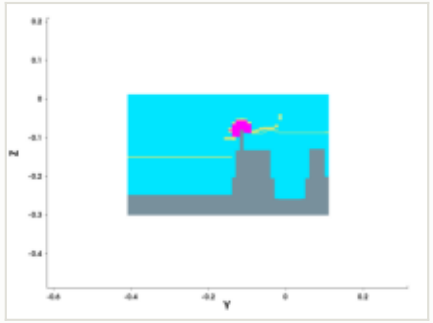

y cut at -0.150 µm

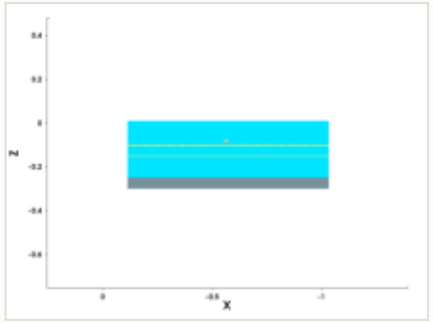

mask for this step

no mask for this step

steps by process area

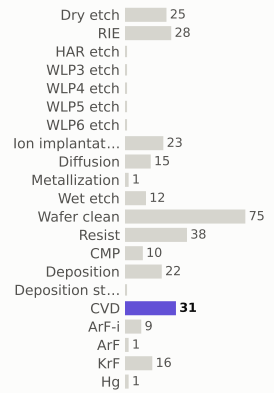

materials deposited (g)

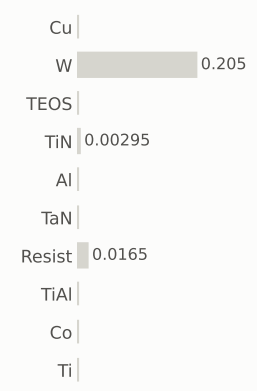

gases emitted (g)

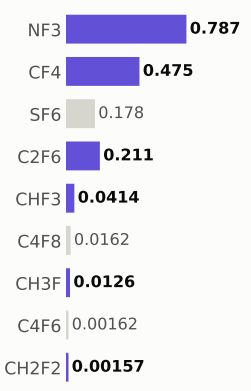

Step #4070: Deposition

depo_isotropic · Deposition

0.656	190.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

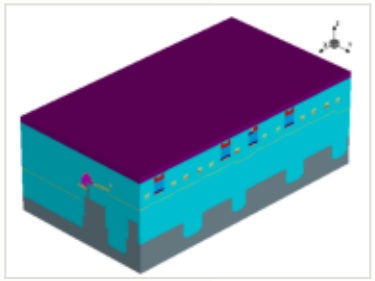

this step

process area	Deposition
material	—
thickness	0.019 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

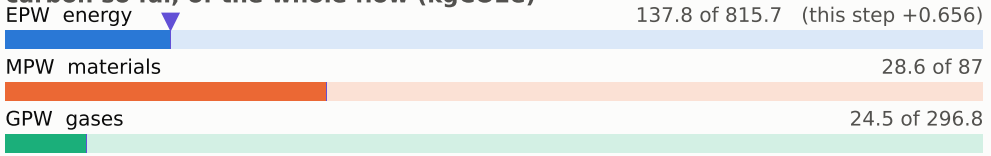

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

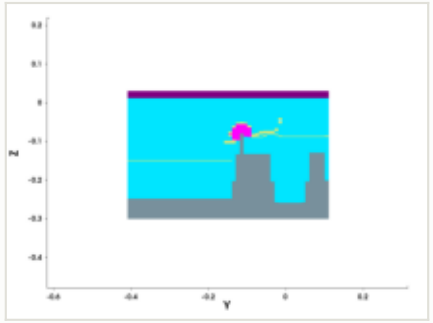

y cut at -0.150 µm

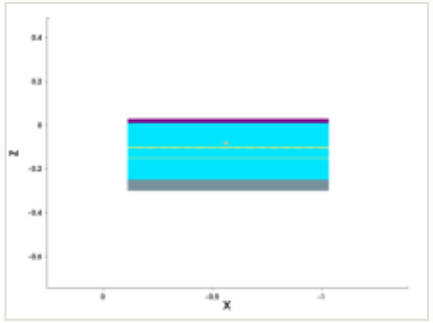

mask for this step

no mask for this step

steps by process area

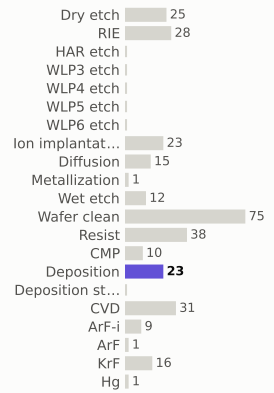

materials deposited (g)

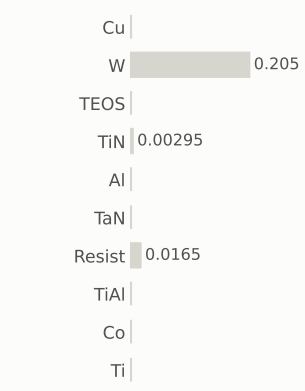

gases emitted (g)

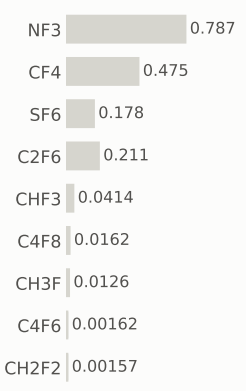

Step #4080: Wafer_clean

clean · Wafer_clean

0.169	191.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

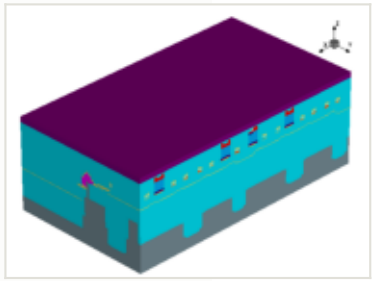

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

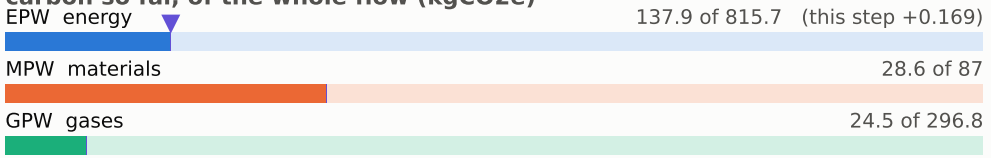

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

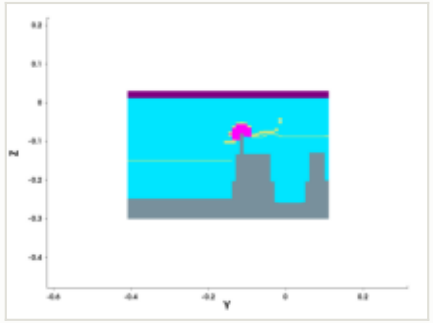

y cut at -0.150 µm

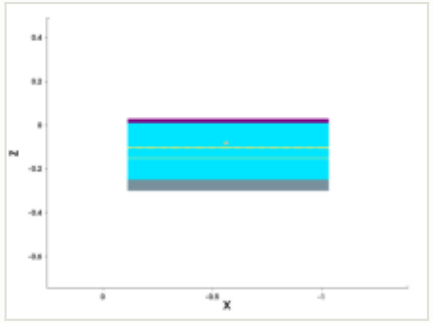

mask for this step

no mask for this step

steps by process area

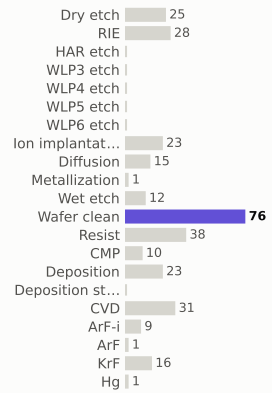

materials deposited (g)

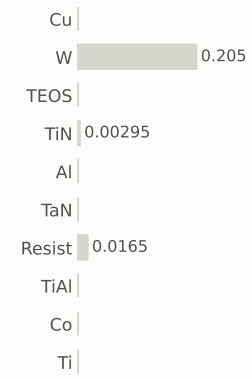

gases emitted (g)

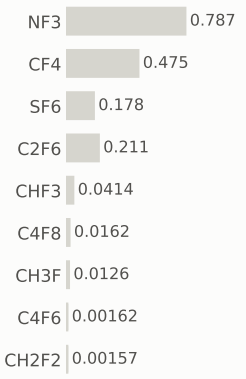

Step #4090: CVD

depo_isotropic · CVD

1.31	192.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

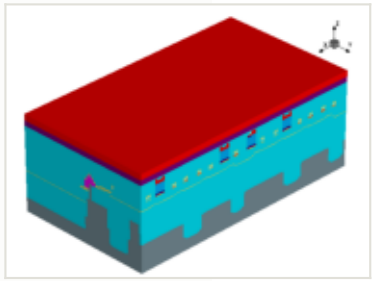

this step

process area	CVD
material	—
thickness	0.022 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

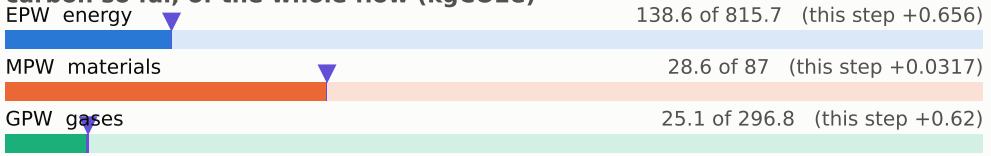

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

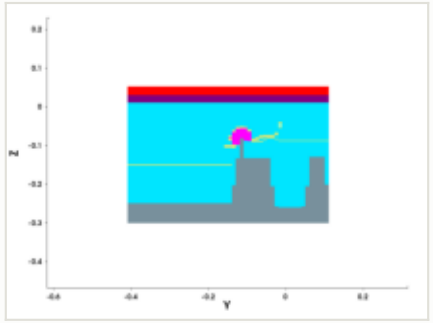

y cut at -0.150 µm

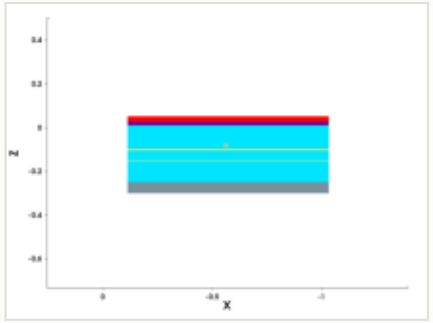

mask for this step

no mask for this step

steps by process area

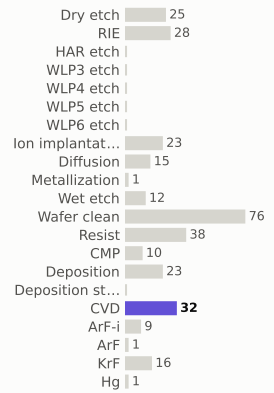

materials deposited (g)

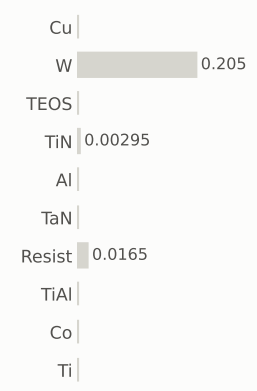

gases emitted (g)

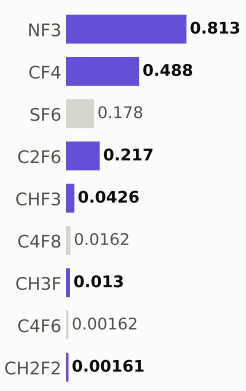

Step #4100: Spx_only

depo_fill · Spx_only

2.59e-05	192.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

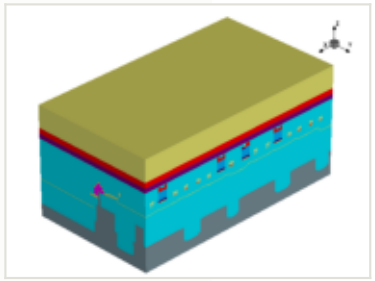

this step

process area	Spx_only	EPW	0 kgCO2e
material	Resist	EPW tool	0 kgCO2e
thickness	0.09 µm	EPW overhead	0 kgCO2e
material GWP	4.2 gCO2e/g	MPW	2.59e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**2.59e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

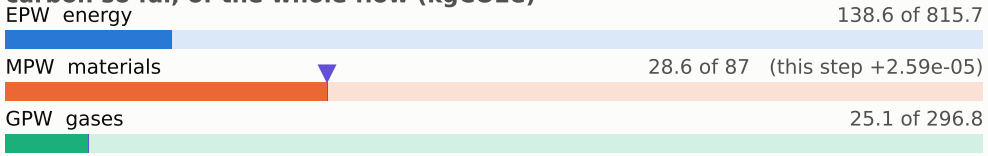

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

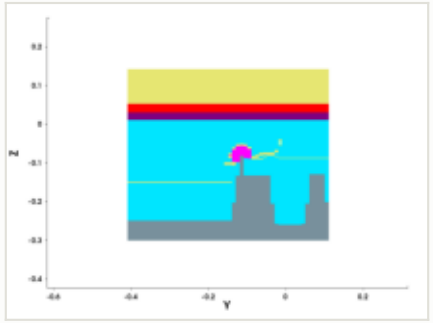

y cut at -0.150 µm

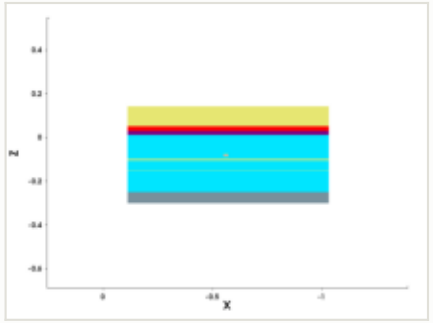

mask for this step

no mask for this step

steps by process area

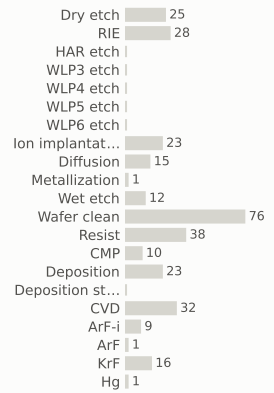

materials deposited (g)

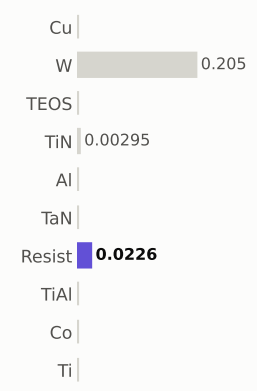

gases emitted (g)

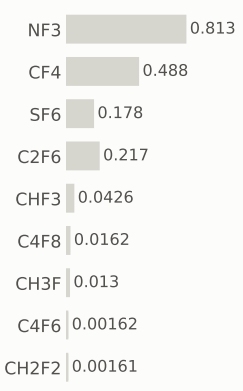

Step #4110: Resist

resist · Resist

0.169	192.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

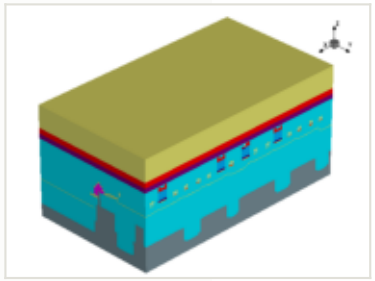

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

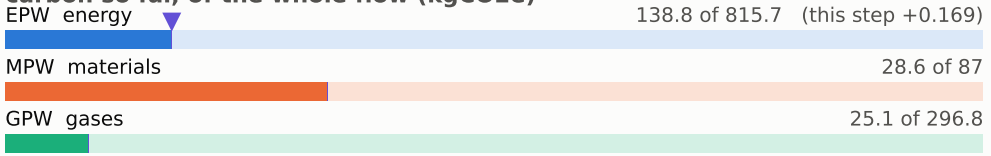

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

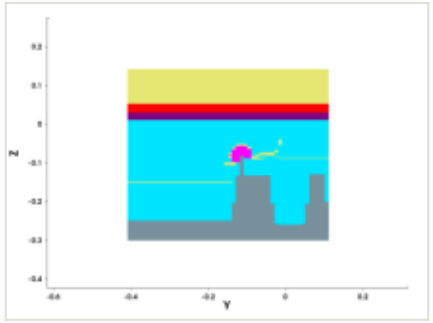

y cut at -0.150 µm

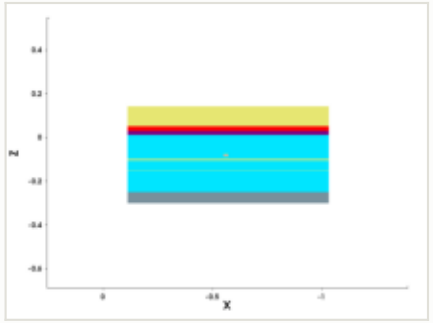

mask for this step

no mask for this step

steps by process area

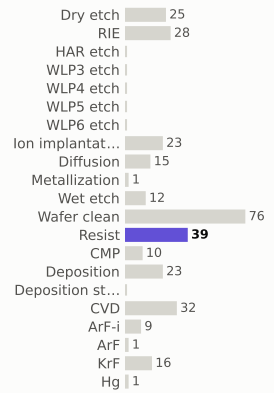

materials deposited (g)

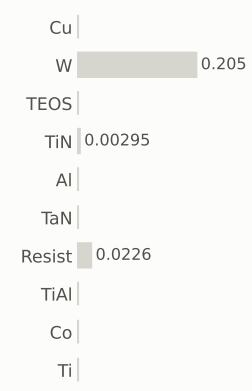

gases emitted (g)

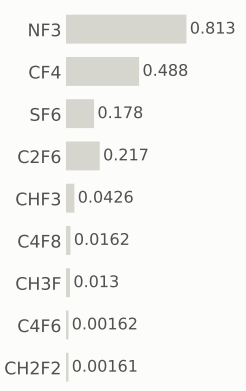

Step #4120: KrF

litho_patterning · KrF

0.199	192.7	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

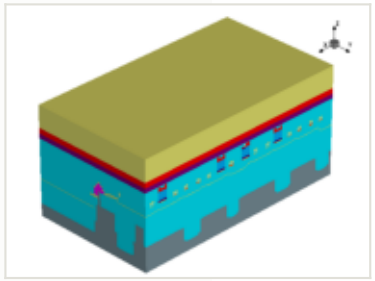

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

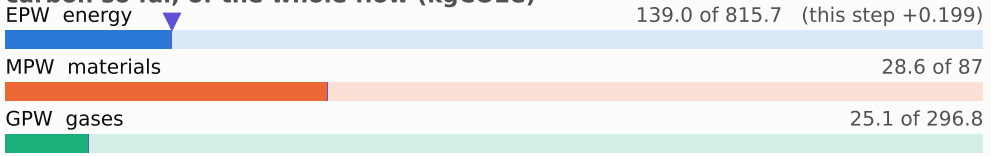

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

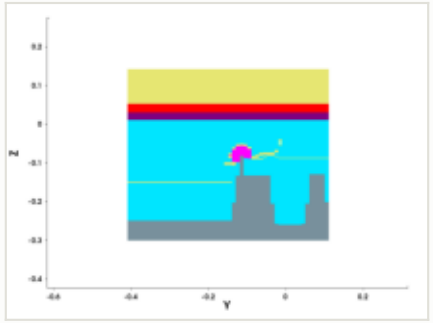

y cut at -0.150 µm

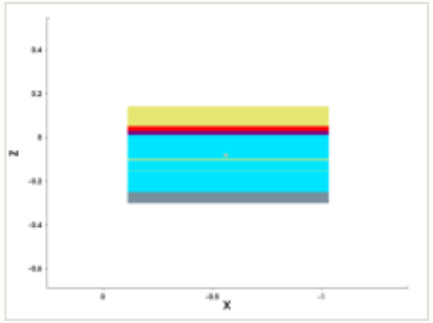

mask for this step

no mask for this step

steps by process area

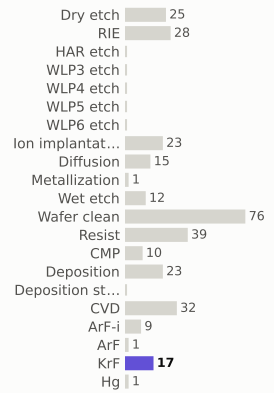

materials deposited (g)

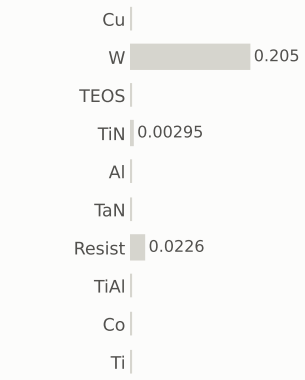

gases emitted (g)

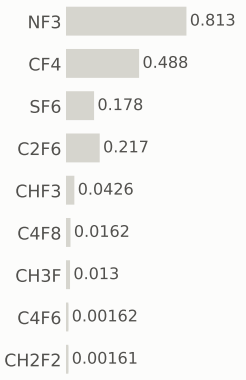

Step #4130: RIE

etch_anisotropic · RIE

1.04	193.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

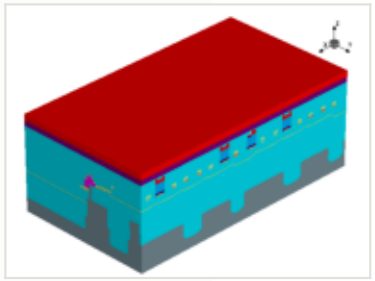

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

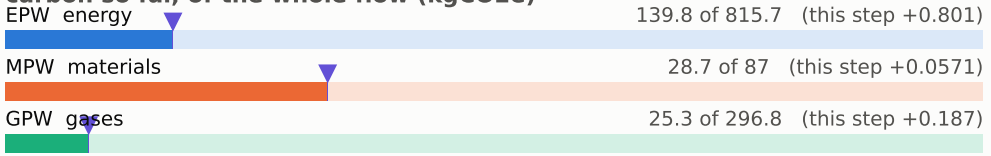

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

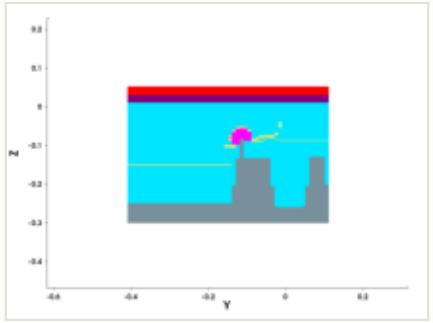

y cut at -0.150 µm

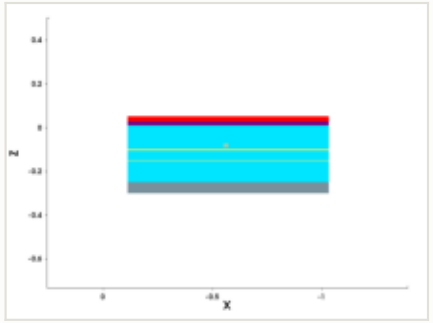

mask for this step

no mask for this step

steps by process area

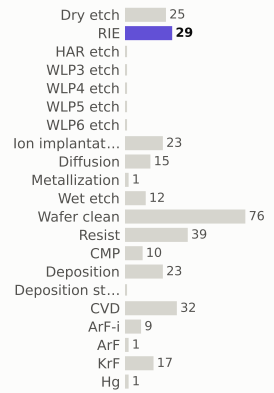

materials deposited (g)

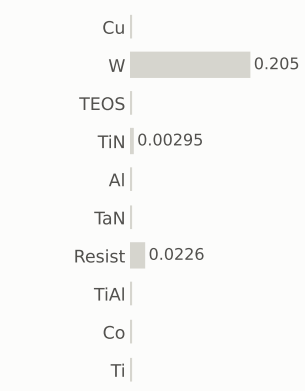

gases emitted (g)

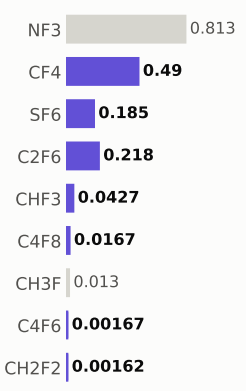

Step #4140: Spx_only

etch_anisotropic · Spx_only

0	193.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

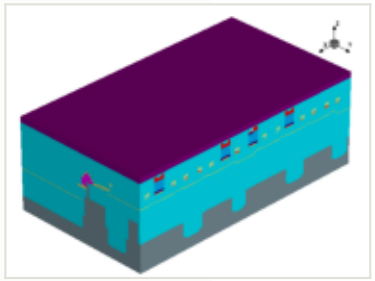

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

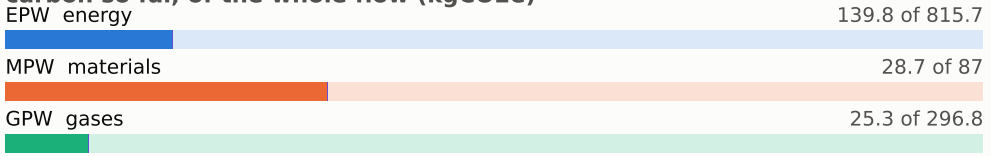

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

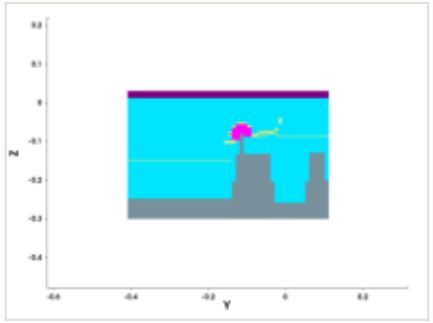

y cut at -0.150 µm

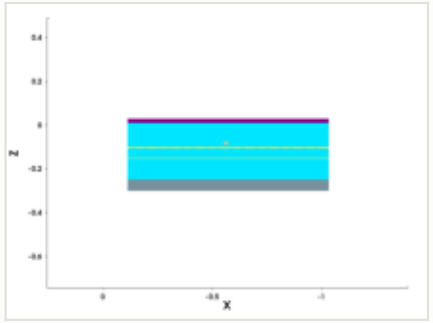

mask for this step

no mask for this step

steps by process area

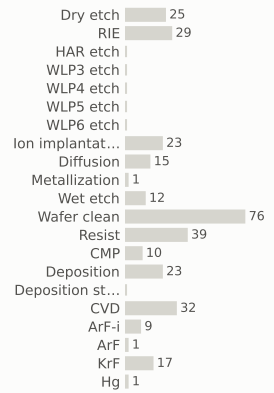

materials deposited (g)

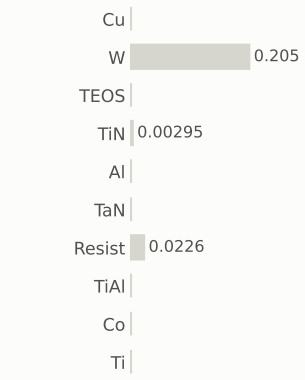

gases emitted (g)

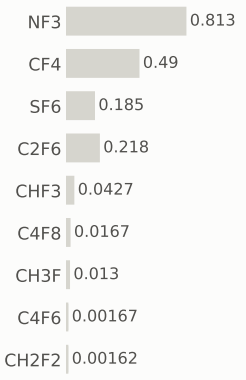

Step #4150: Dry_etch

etch_strip · Dry_etch

0.801	194.5	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

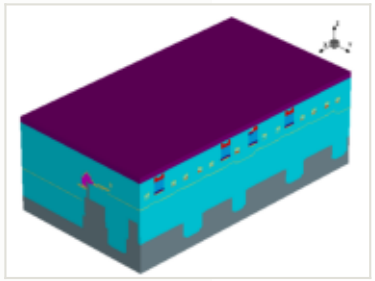

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

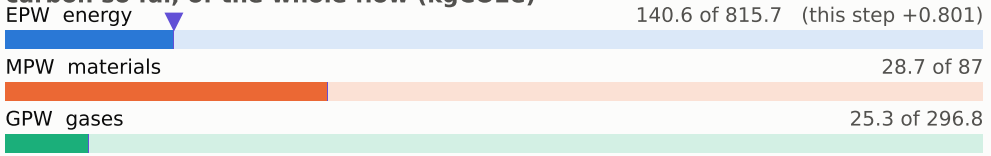

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

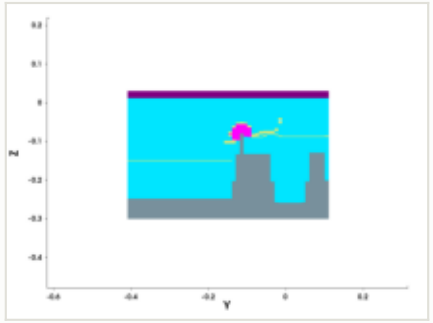

y cut at -0.150 µm

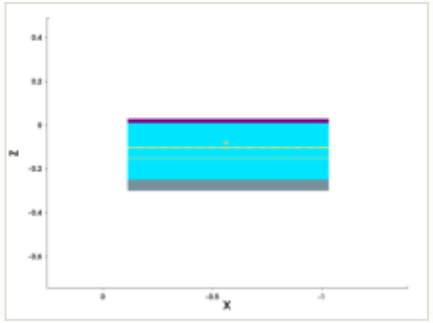

mask for this step

no mask for this step

steps by process area

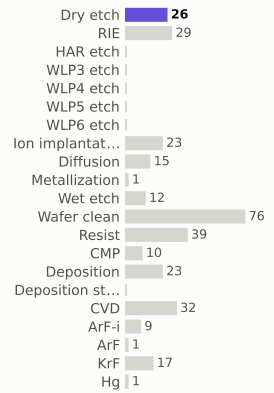

materials deposited (g)

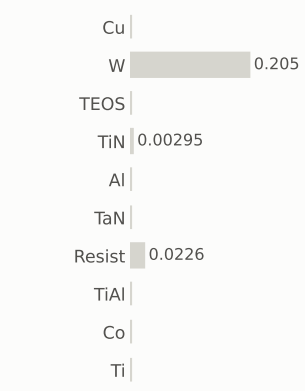

gases emitted (g)

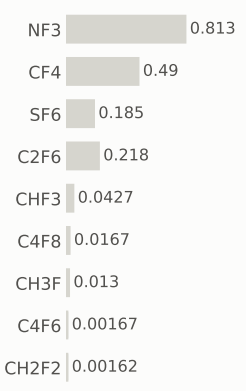

Step #4160: Spx_only

etch_anisotropic · Spx_only

0	194.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

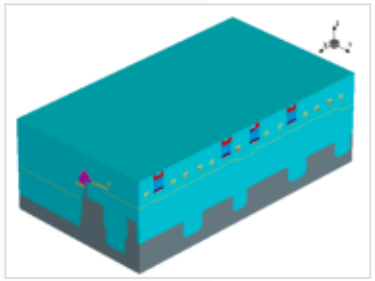

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

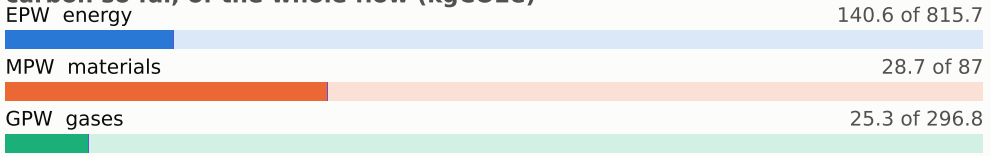

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

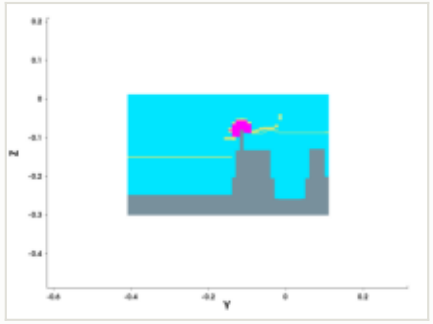

y cut at -0.150 µm

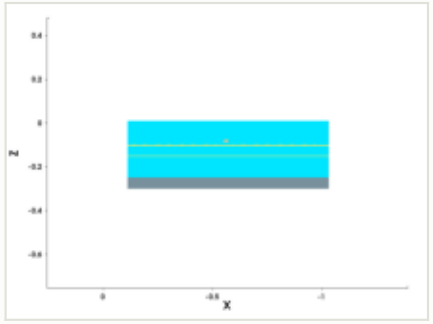

mask for this step

no mask for this step

steps by process area

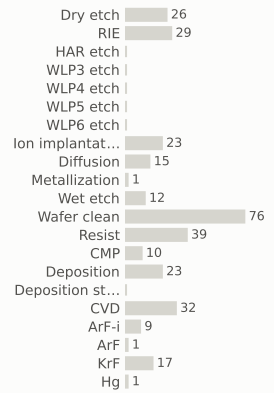

materials deposited (g)



gases emitted (g)

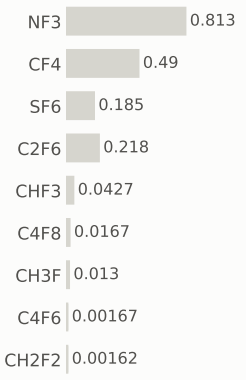

Step #4170: Wafer_clean

clean · Wafer_clean

0.169	194.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

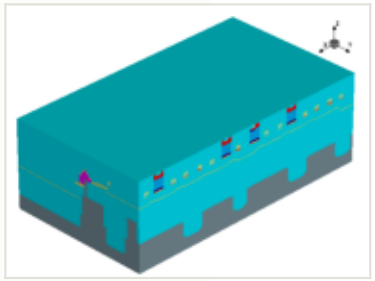

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

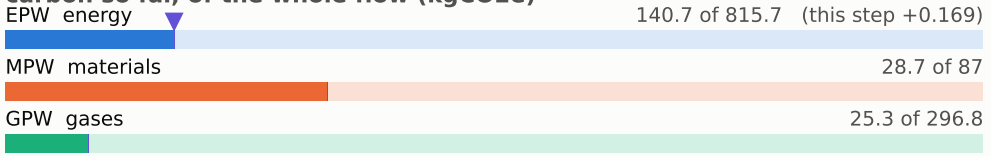

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

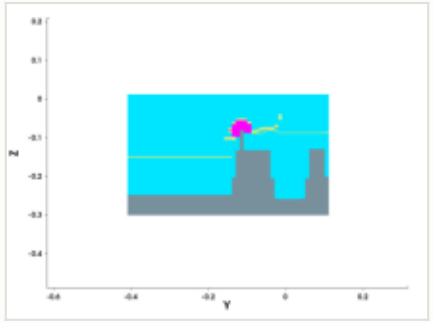

y cut at -0.150 µm

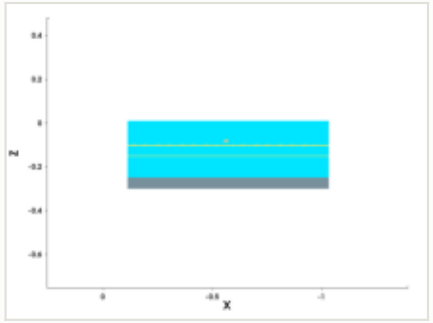

mask for this step

no mask for this step

steps by process area

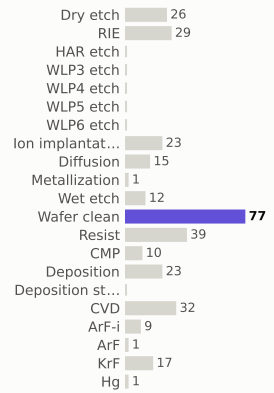

materials deposited (g)



gases emitted (g)

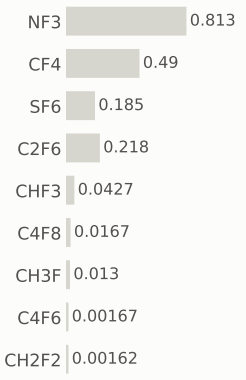

Step #4180: CVD

depo_fill · CVD

1.31	196.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

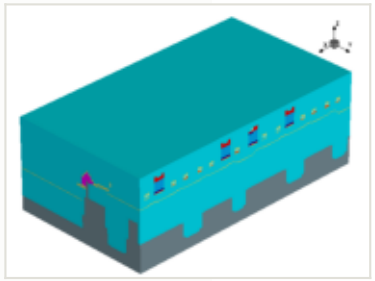

this step

process area	CVD
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

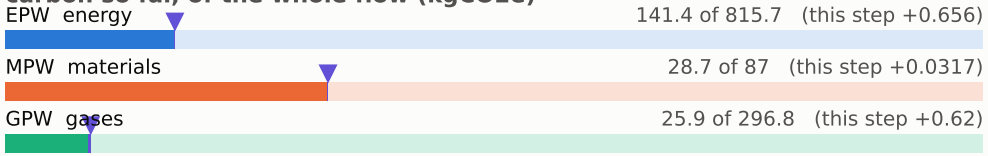

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

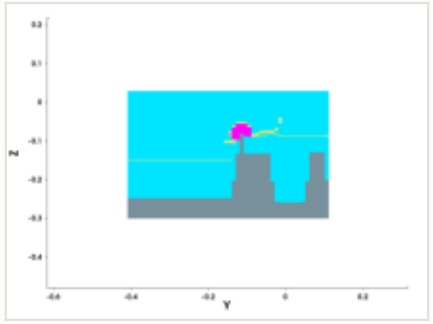

y cut at -0.150 µm

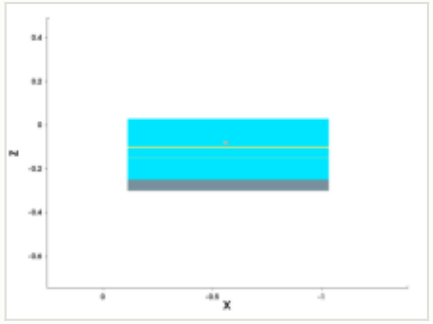

mask for this step

no mask for this step

steps by process area

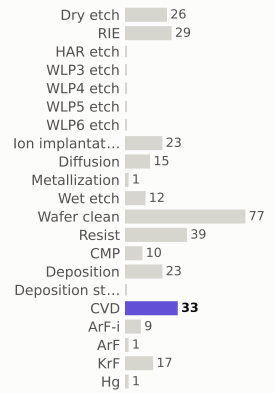

materials deposited (g)

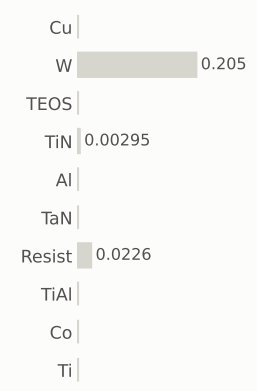

gases emitted (g)

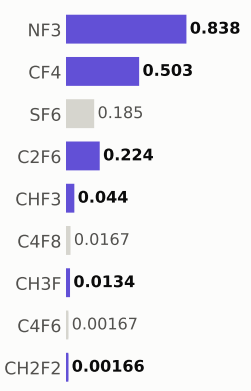

Step #4190: Spx_only

depo_fill · Spx_only

0	196.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

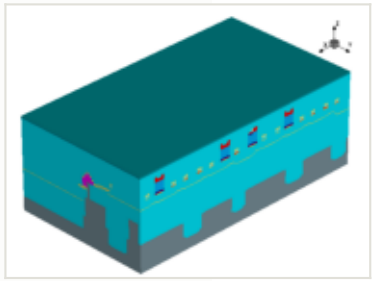

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.007 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

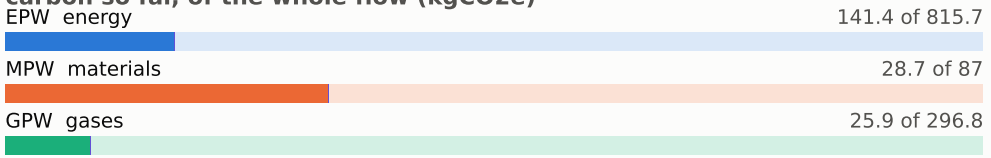

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

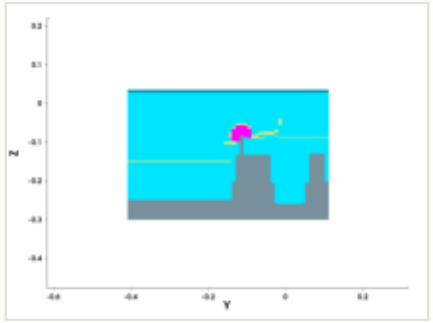

y cut at -0.150 µm

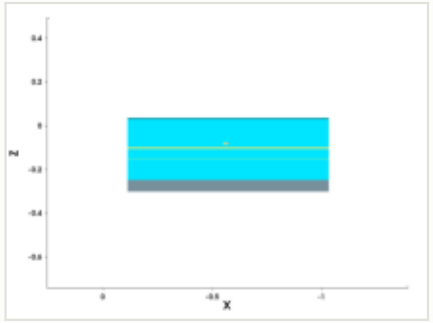

mask for this step

no mask for this step

steps by process area

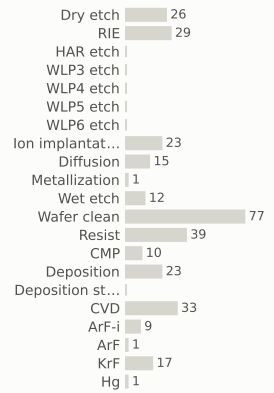

materials deposited (g)

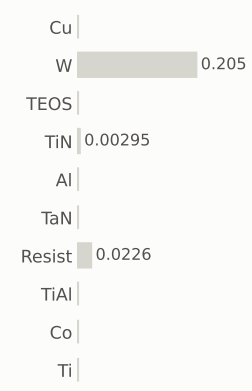

gases emitted (g)

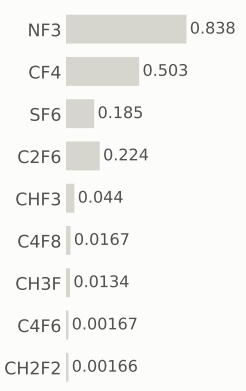

Step #4200: CVD

depo_fill · CVD

1.31	197.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

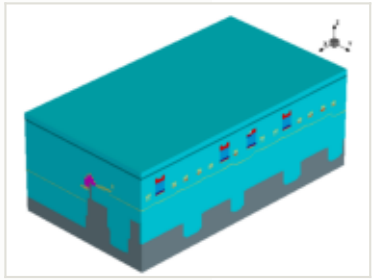

this step

process area	CVD
material	—
thickness	0.019 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

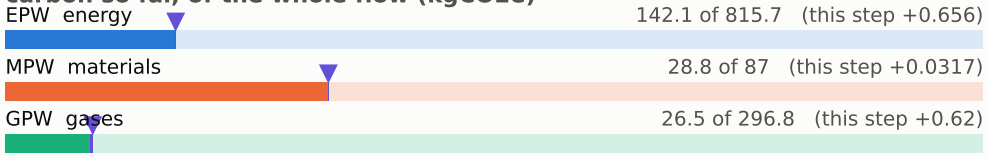

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

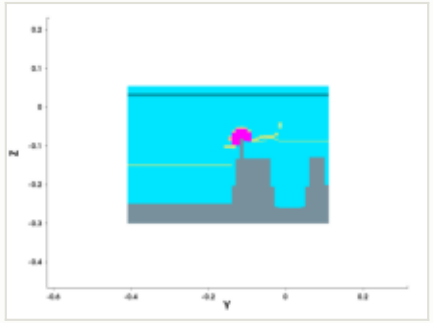

y cut at -0.150 µm

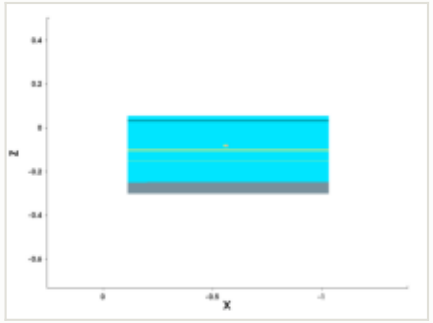

mask for this step

no mask for this step

steps by process area

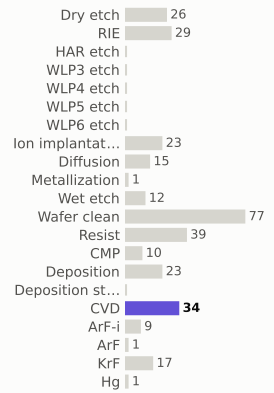

materials deposited (g)

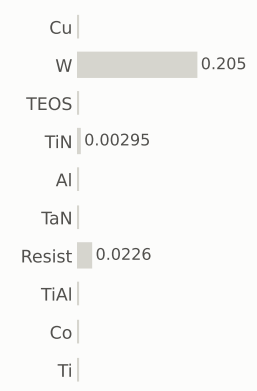

gases emitted (g)



Step #4210: Spx_only

depo_fill · Spx_only

0	197.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

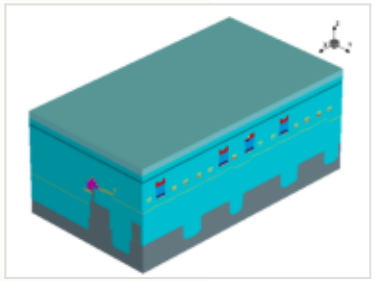

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.025 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

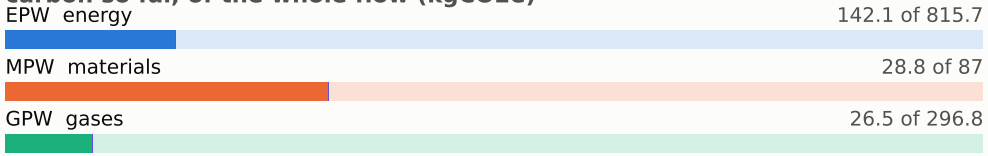

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

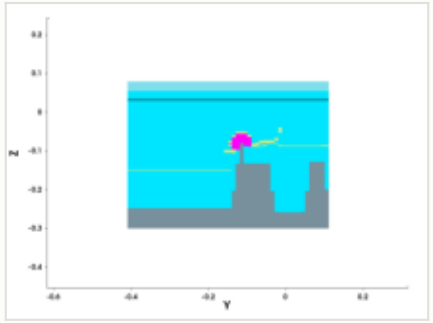

y cut at -0.150 µm

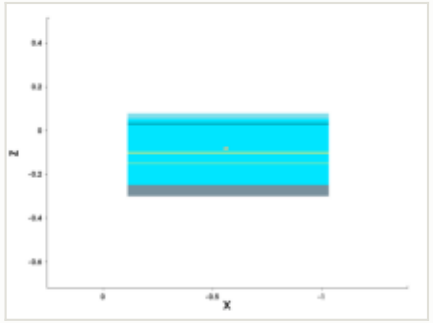

mask for this step

no mask for this step

steps by process area

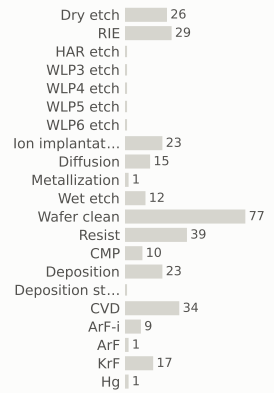

materials deposited (g)

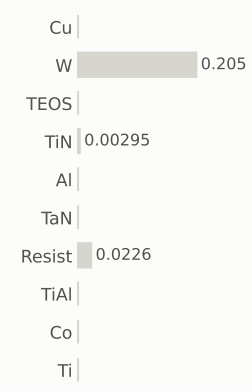

gases emitted (g)

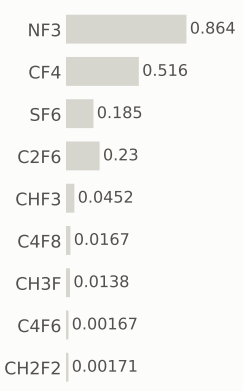

Step #4220: Resist

depo_fill · Resist

0.169	197.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

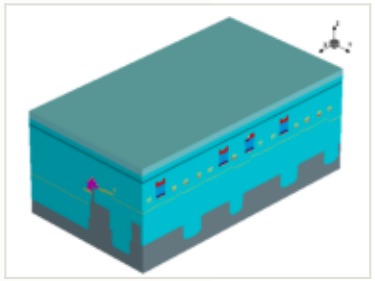

this step

process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

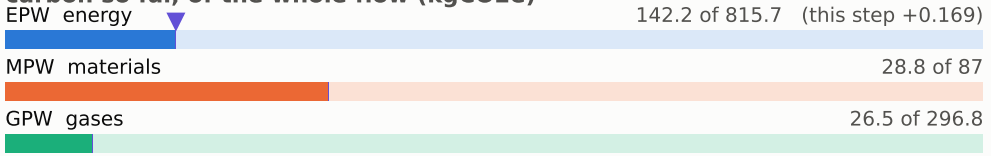

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

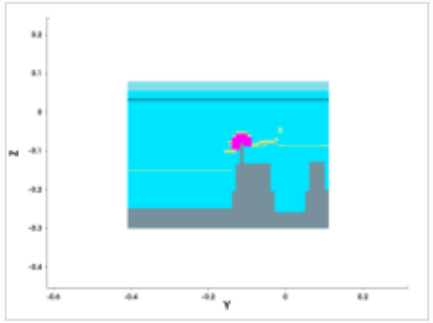

y cut at -0.150 µm

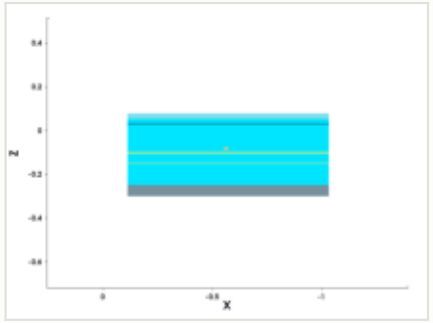

mask for this step

no mask for this step

steps by process area

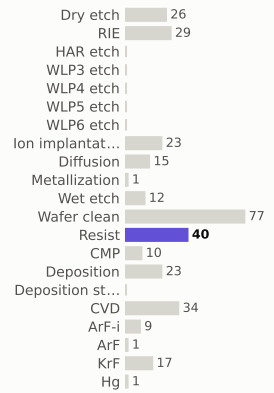

materials deposited (g)



gases emitted (g)

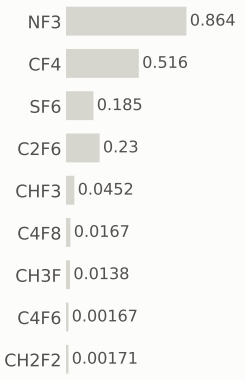

Step #4230: CVD

depo_fill · CVD

1.31	198.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

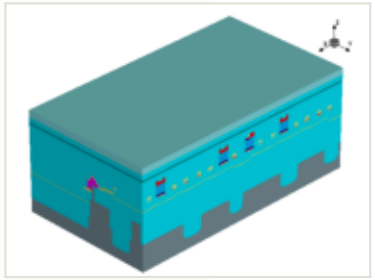

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

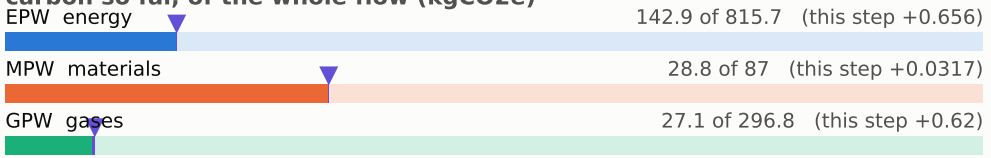

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

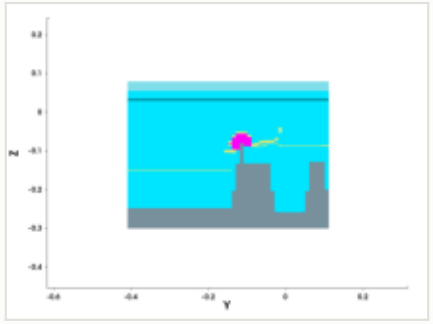

y cut at -0.150 µm

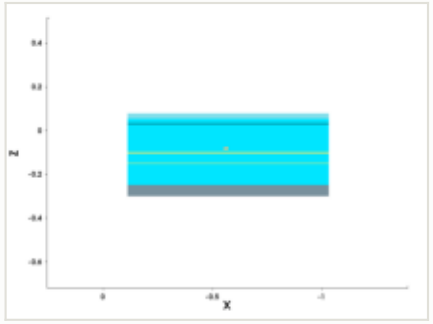

mask for this step

no mask for this step

steps by process area

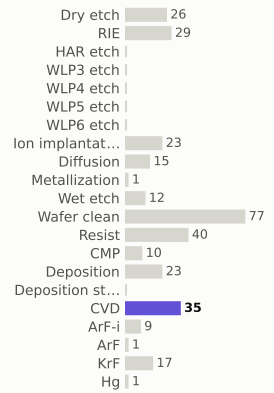

materials deposited (g)

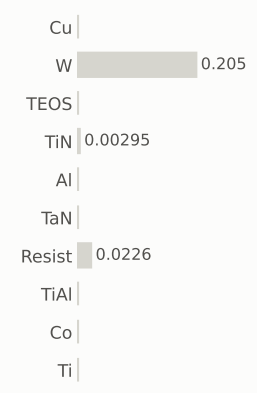

gases emitted (g)

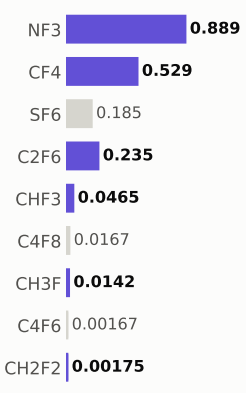

Step #4240: CVD

depo_fill · CVD

1.31	200.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

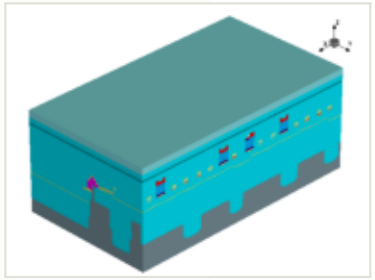

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

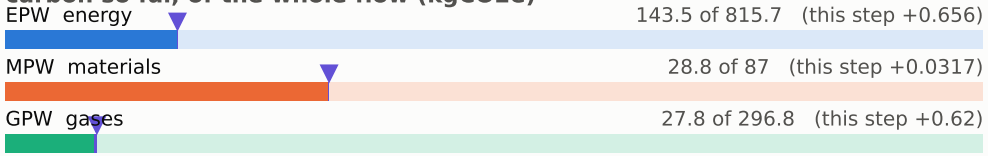

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

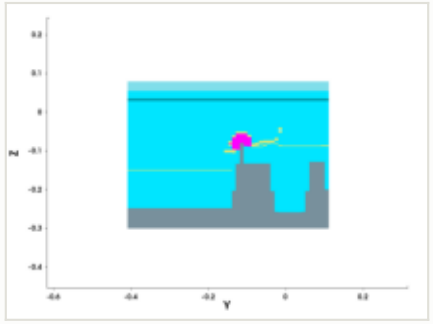

y cut at -0.150 µm

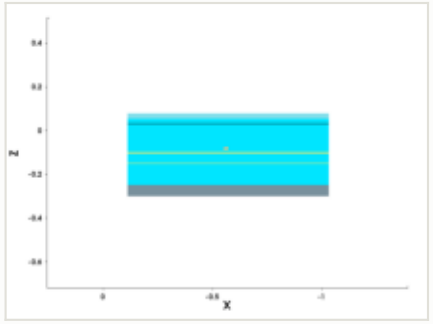

mask for this step

no mask for this step

steps by process area

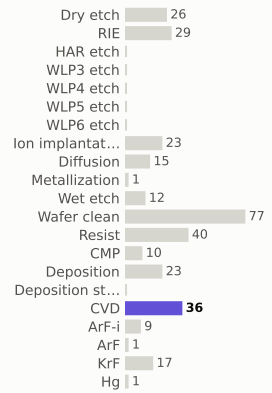

materials deposited (g)

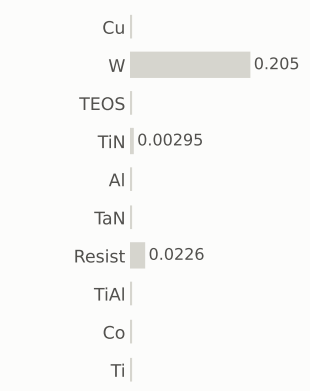

gases emitted (g)



Step #4250: Resist

depo_fill · Resist

0.169	200.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

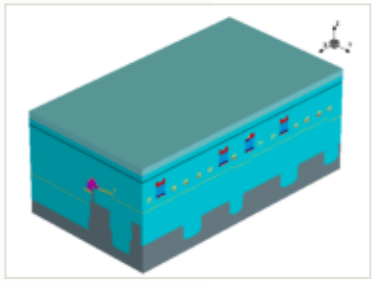

this step

process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

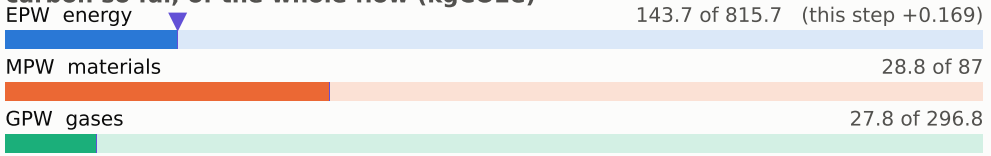

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

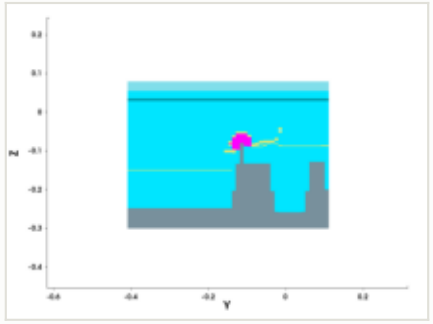

y cut at -0.150 µm

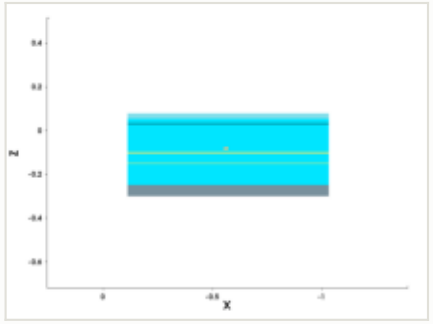

mask for this step

no mask for this step

steps by process area

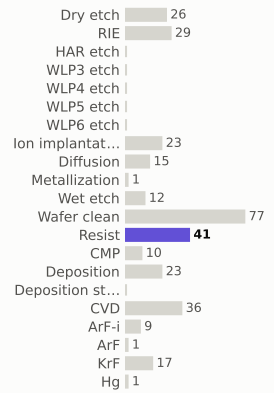

materials deposited (g)

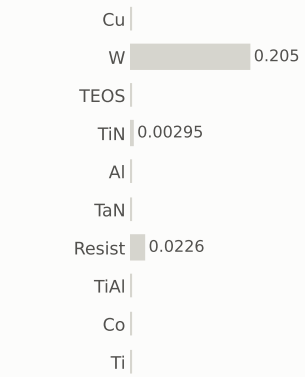

gases emitted (g)

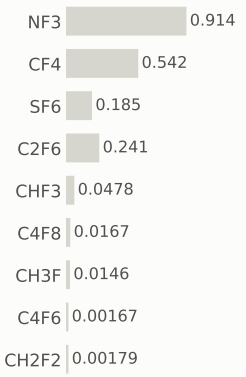

Step #4260: CVD

depo_fill · CVD

1.31	201.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

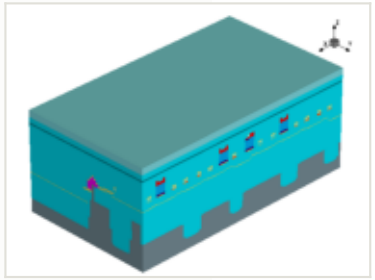

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

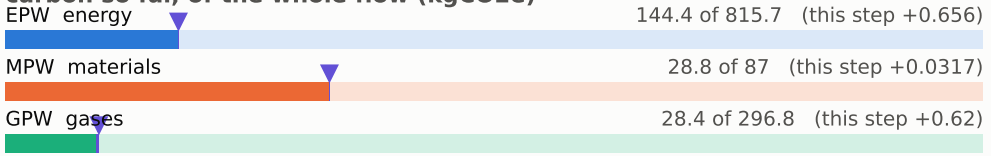

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

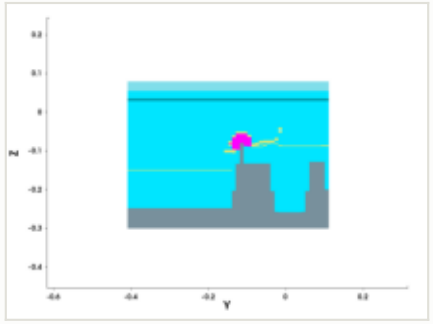

y cut at -0.150 µm

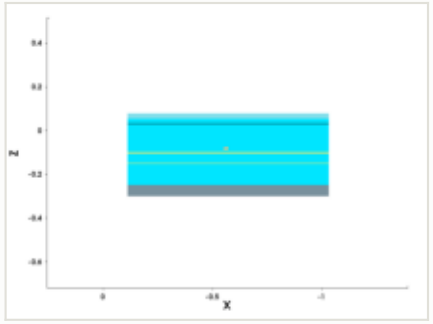

mask for this step

no mask for this step

steps by process area

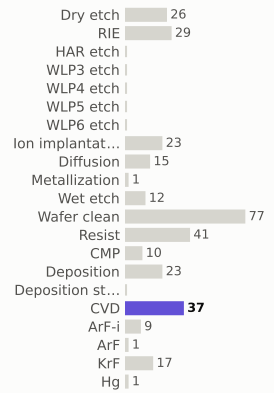

materials deposited (g)

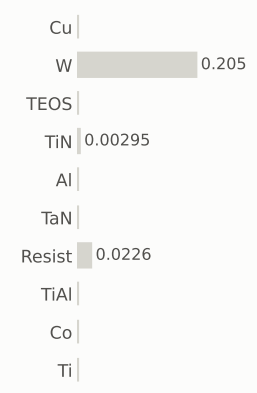

gases emitted (g)

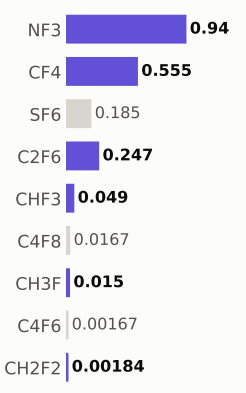

Step #4270: Wafer_clean

clean · Wafer_clean

0.169	201.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

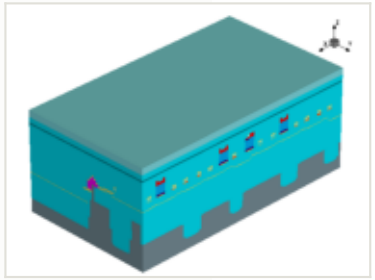

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

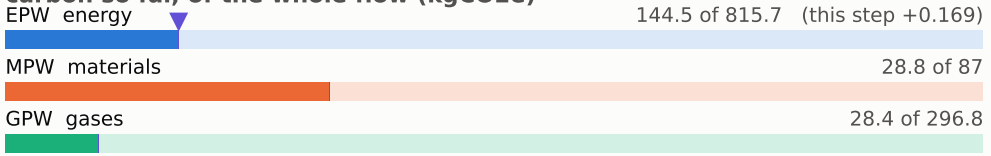

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

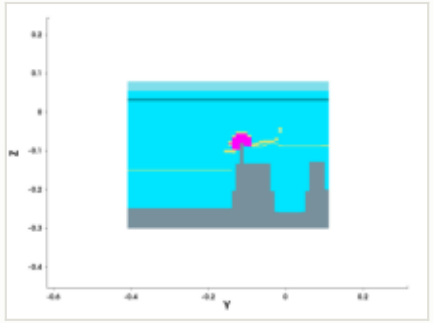

y cut at -0.150 µm

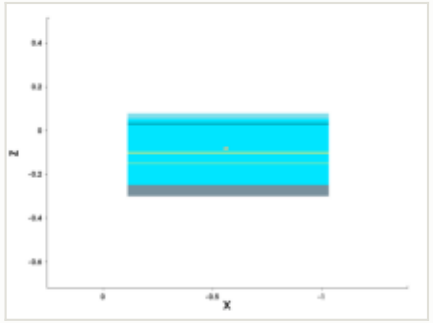

mask for this step

no mask for this step

steps by process area

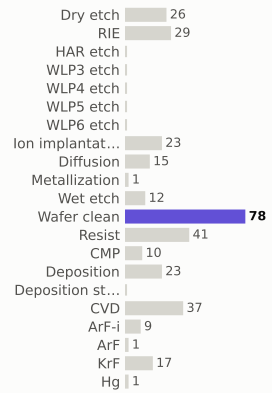

materials deposited (g)

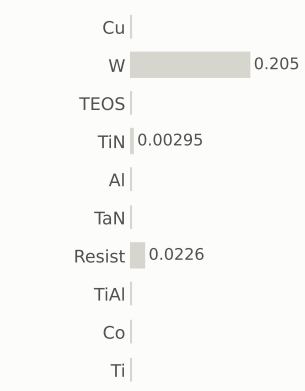

gases emitted (g)

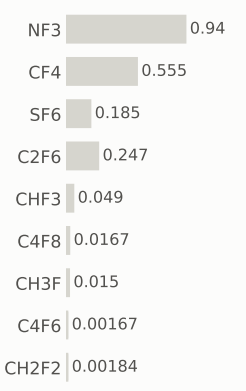

Step #4280: Resist

resist · Resist

0.169	201.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

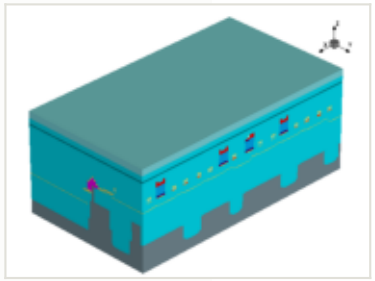

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

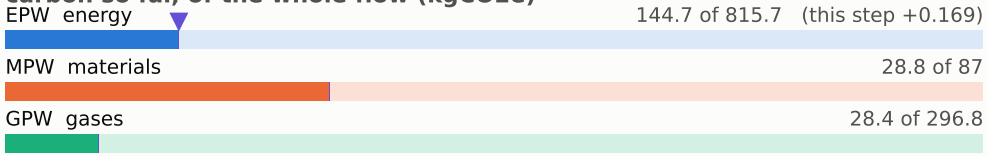

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

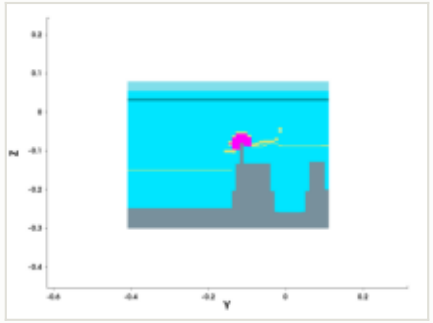

y cut at -0.150 µm

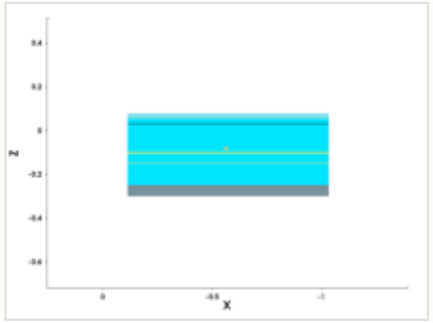

mask for this step

no mask for this step

steps by process area

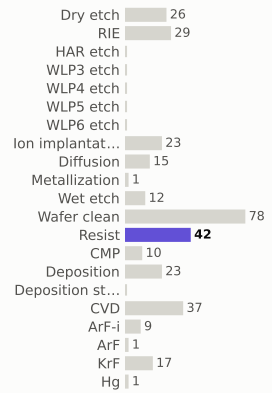

materials deposited (g)

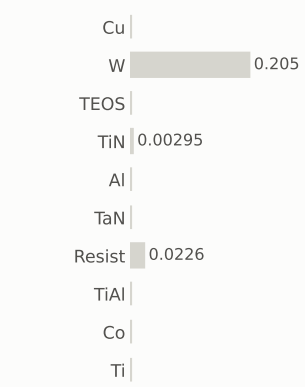

gases emitted (g)

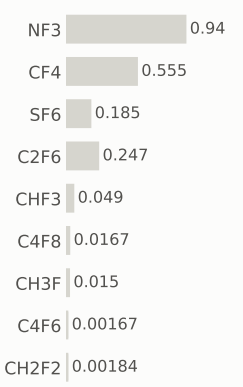

Step #4290: ArF-i

litho_patterning · ArF-i

0.217	202.1	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

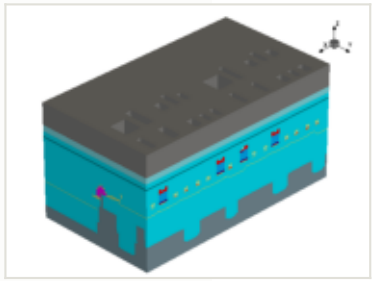

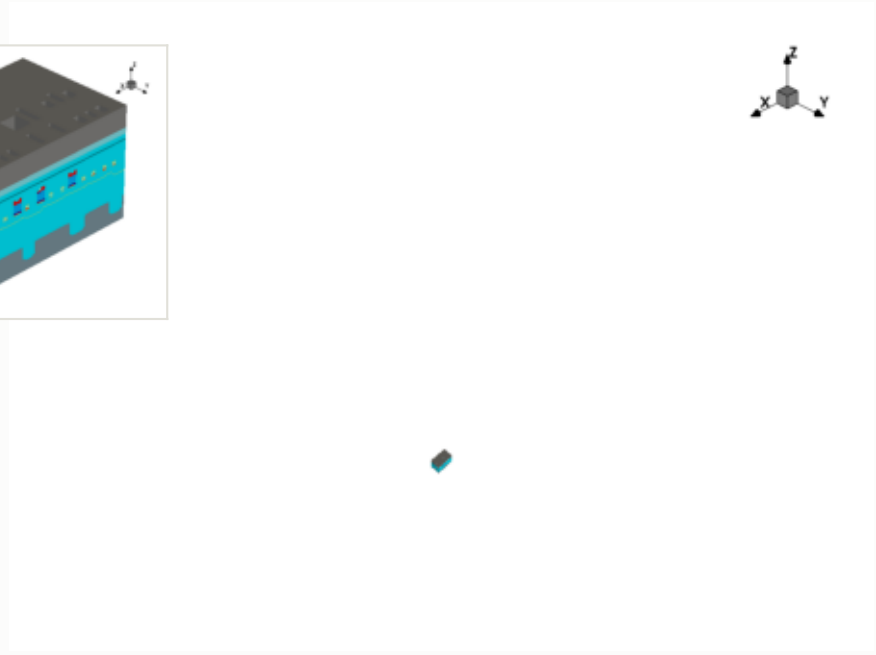

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

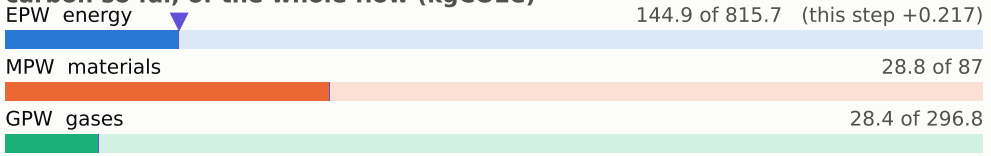

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

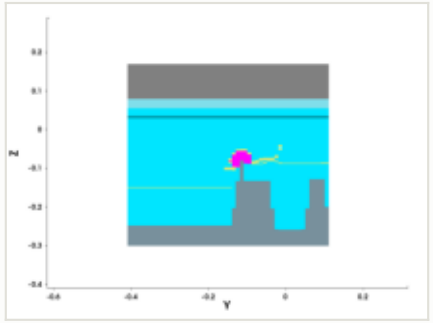

y cut at -0.150 µm

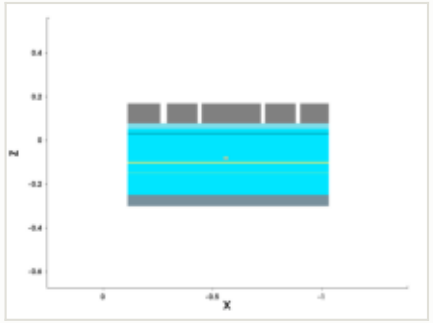

mask: layer 2017:0 (GDSII)

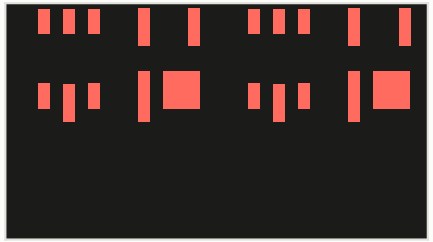

steps by process area

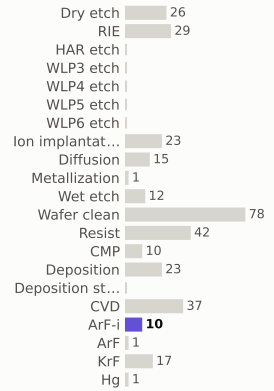

materials deposited (g)

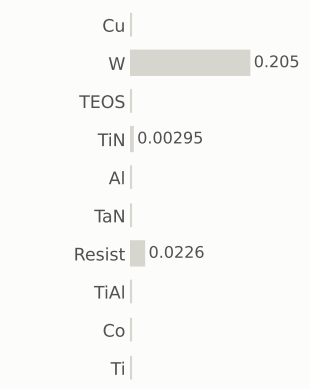

gases emitted (g)

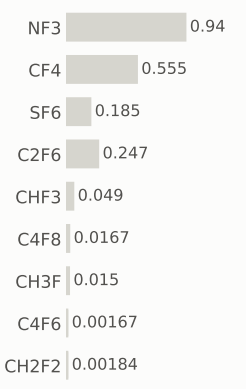

Step #4300: Spx_only

etch_anisotropic · Spx_only

0	202.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

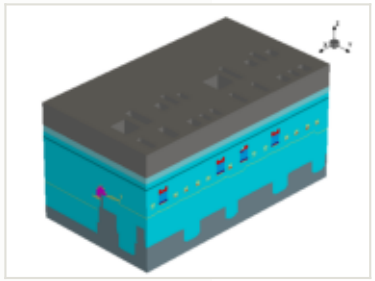

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

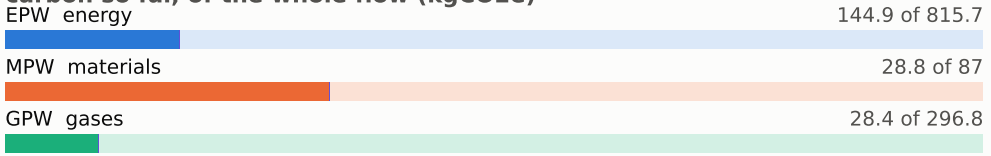

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

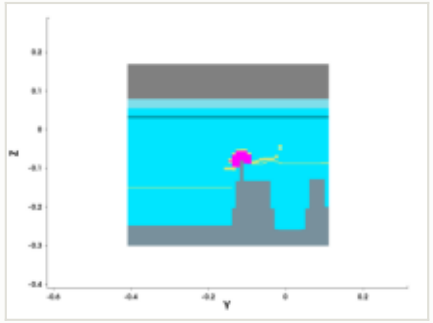

y cut at -0.150 µm

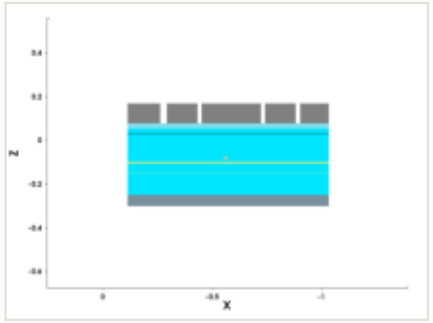

mask for this step

no mask for this step

steps by process area

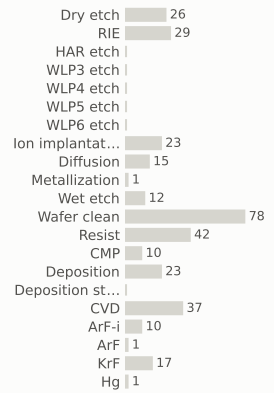

materials deposited (g)

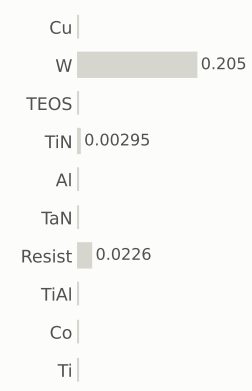

gases emitted (g)

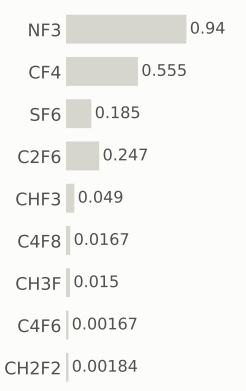

Step #4310: RIE

etch_anisotropic · RIE

1.04	203.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

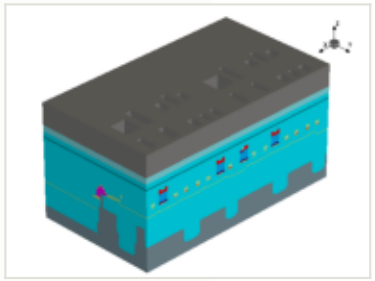

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

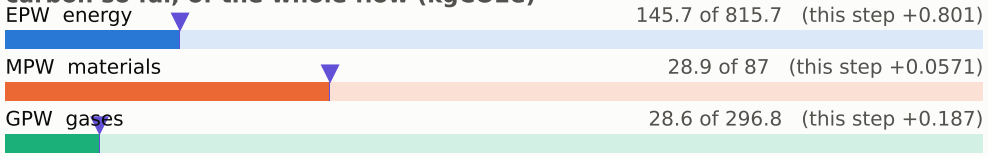

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

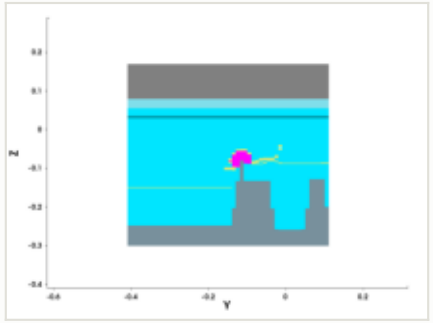

y cut at -0.150 µm

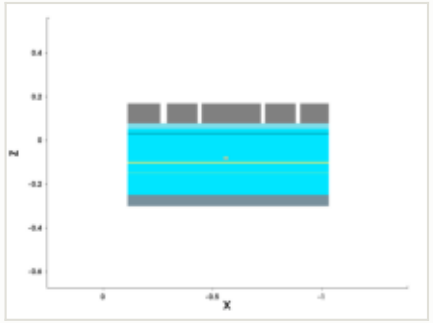

mask for this step

no mask for this step

steps by process area

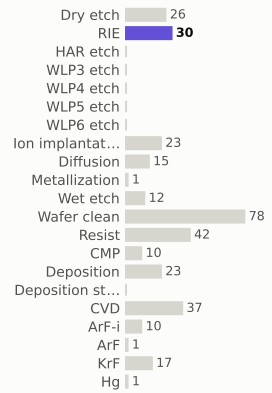

materials deposited (g)

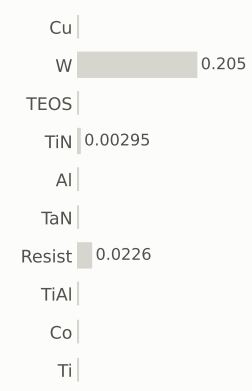

gases emitted (g)

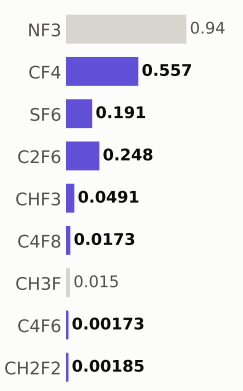

Step #4320: Spx_only

etch_anisotropic · Spx_only

0	203.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

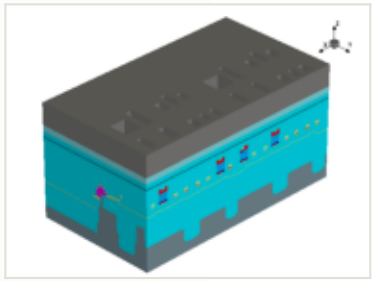

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

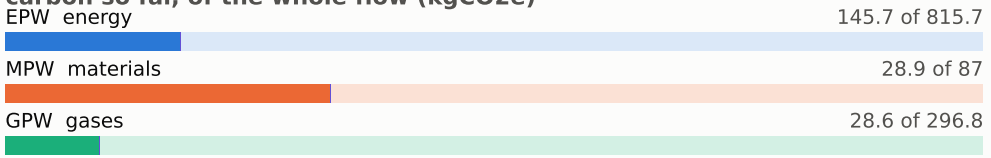

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

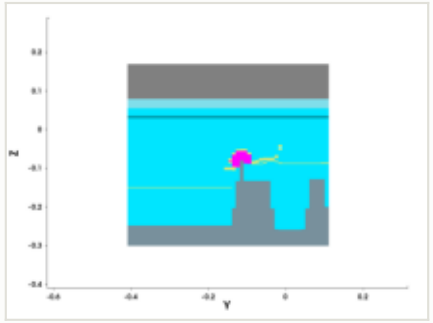

y cut at -0.150 µm

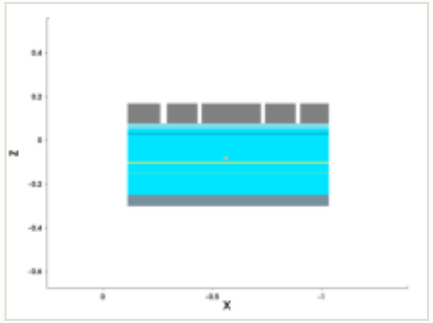

mask for this step

no mask for this step

steps by process area

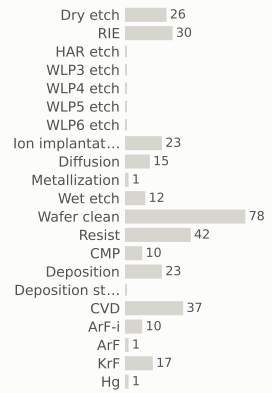

materials deposited (g)

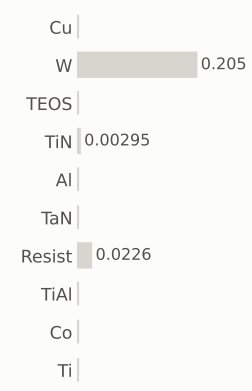

gases emitted (g)

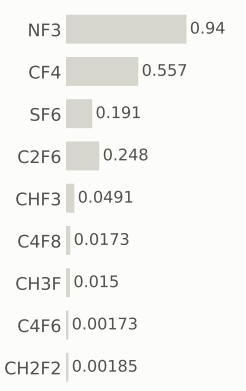

Step #4330: Spx_only

etch_strip · Spx_only

0	203.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

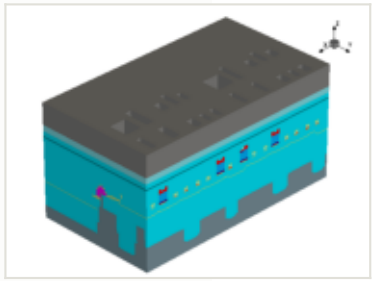

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

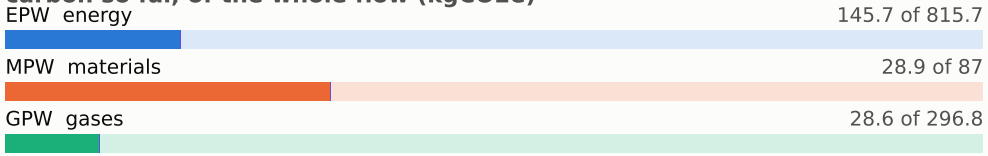

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

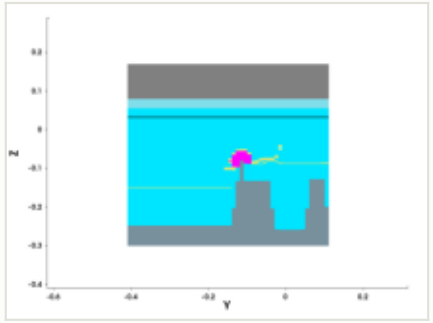

y cut at -0.150 µm

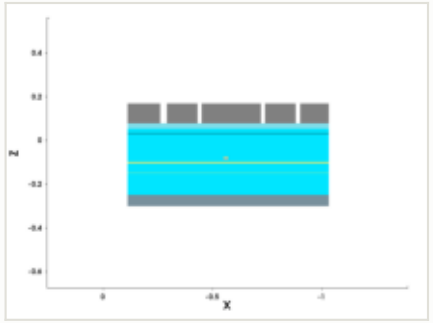

mask for this step

no mask for this step

steps by process area

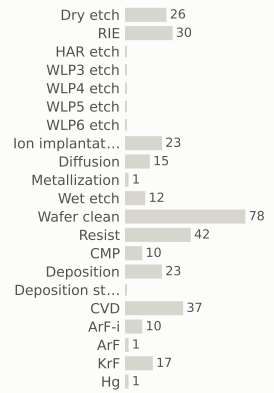

materials deposited (g)

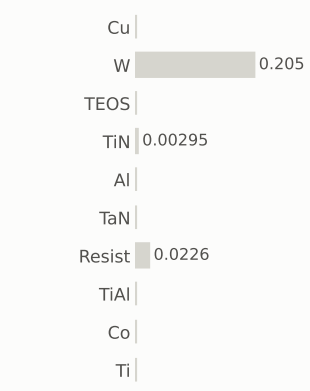

gases emitted (g)

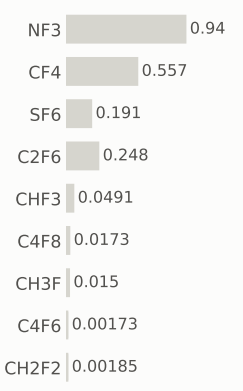

Step #4340: Wafer_clean

clean · Wafer_clean

0.169	203.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

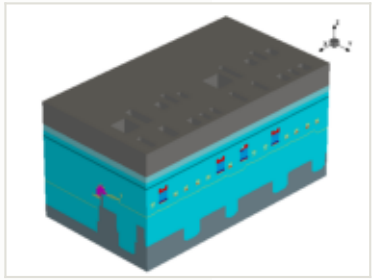

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

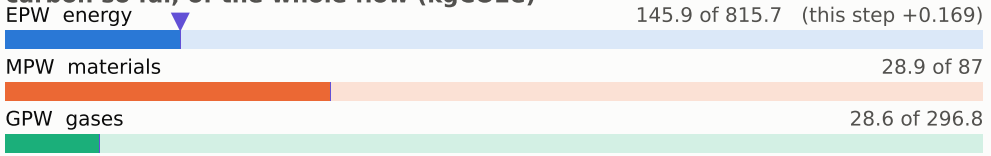

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

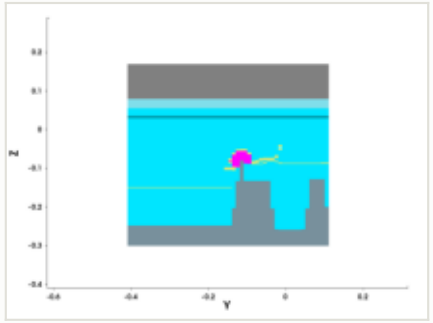

y cut at -0.150 µm

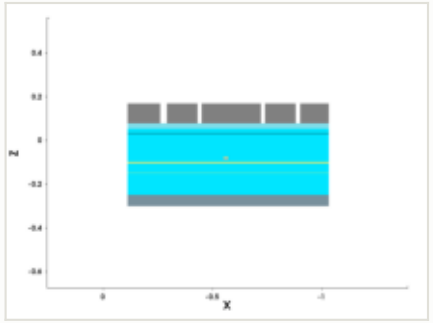

mask for this step

no mask for this step

steps by process area

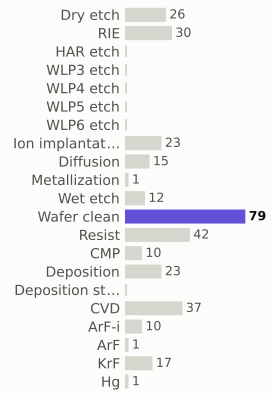

materials deposited (g)

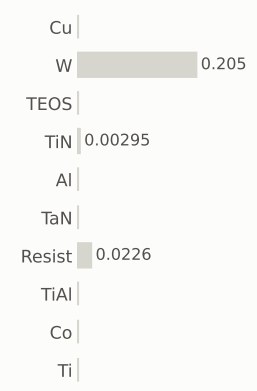

gases emitted (g)

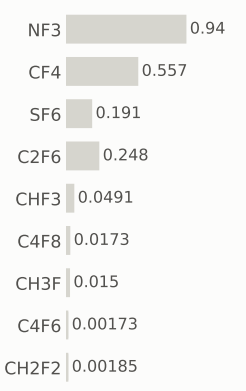

Step #4350: Resist

depo_fill · Resist

0.169	203.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

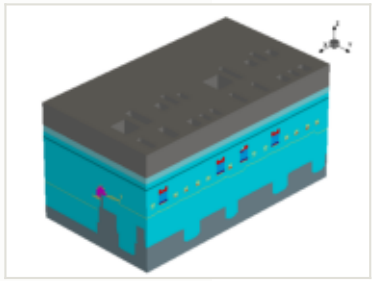

this step

process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

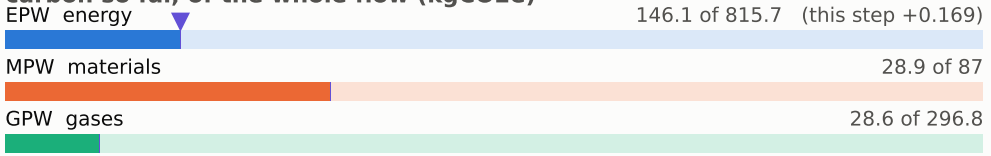

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

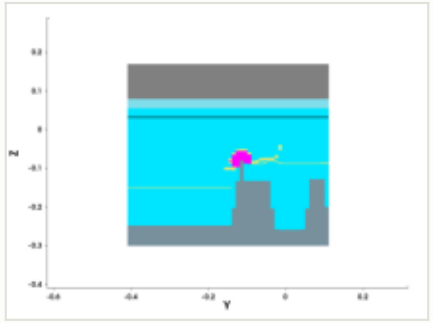

y cut at -0.150 µm

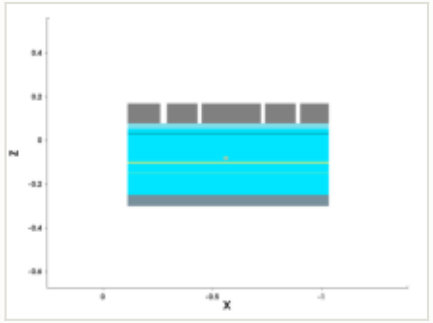

mask for this step

no mask for this step

steps by process area

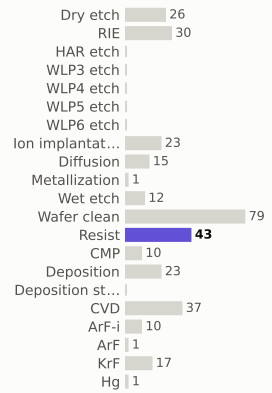

materials deposited (g)

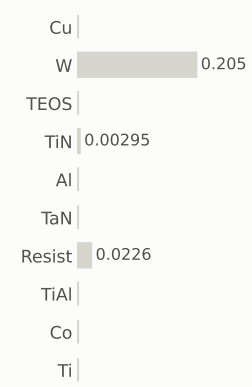

gases emitted (g)

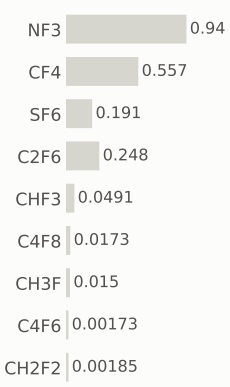

Step #4360: CVD

depo_fill · CVD

1.31	204.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

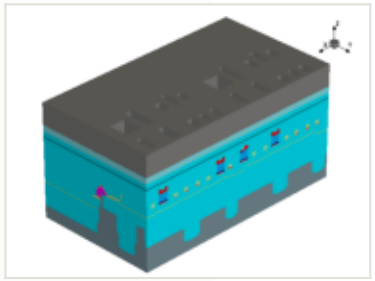

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

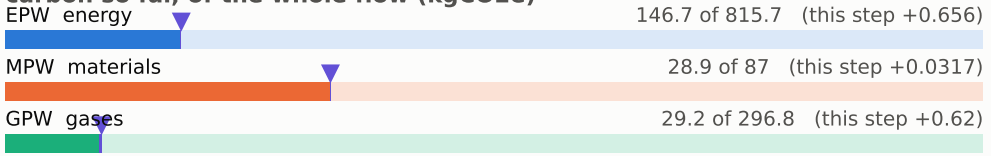

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

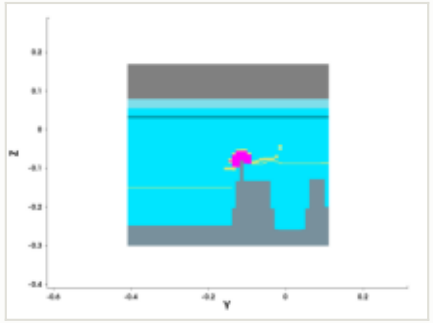

y cut at -0.150 µm

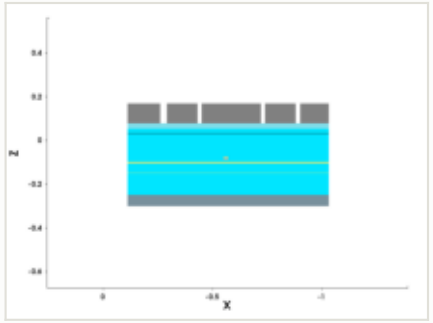

mask for this step

no mask for this step

steps by process area

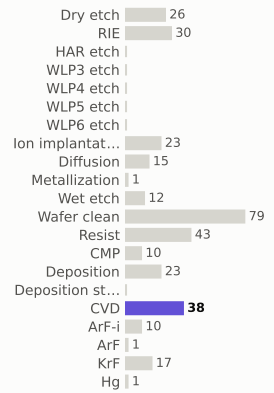

materials deposited (g)

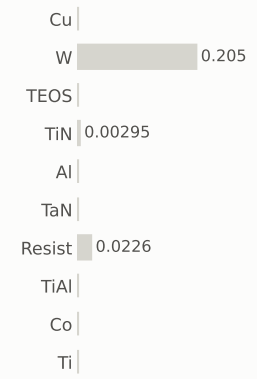

gases emitted (g)

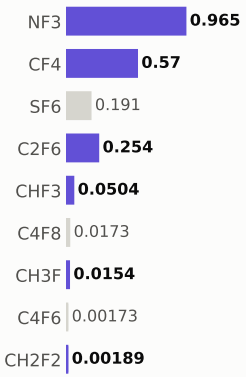

Step #4370: Wafer_clean

clean · Wafer_clean

0.169	205.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

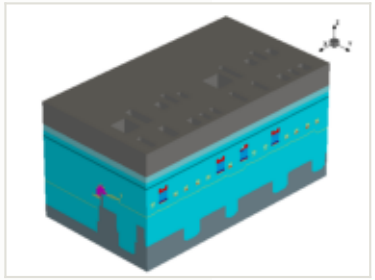

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

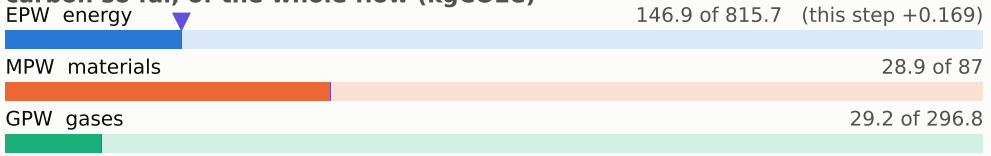

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

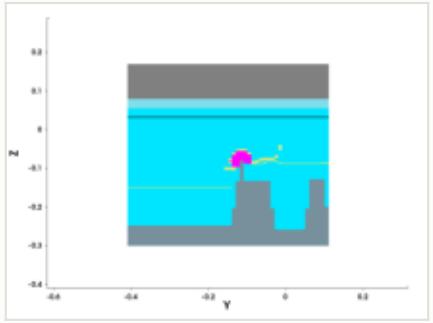

y cut at -0.150 µm

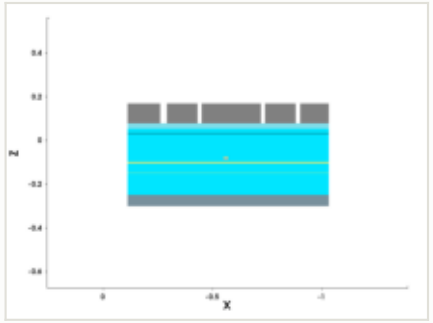

mask for this step

no mask for this step

steps by process area

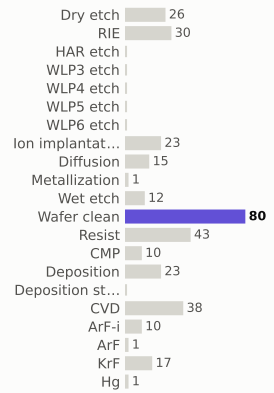

materials deposited (g)



gases emitted (g)

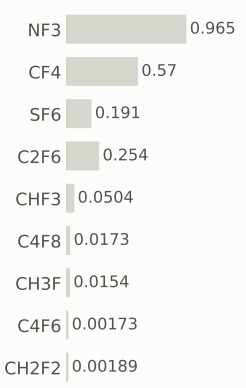

Step #4380: Resist

resist · Resist

0.169	205.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

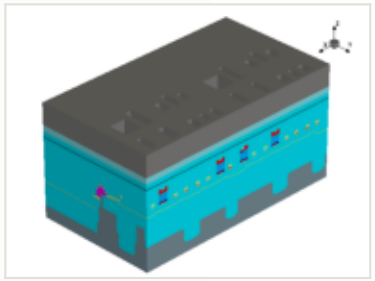

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

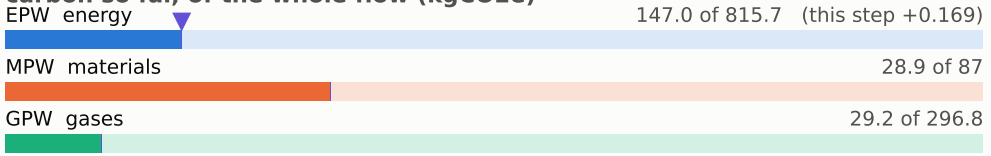

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

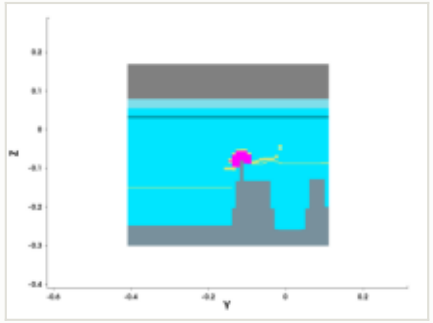

y cut at -0.150 µm

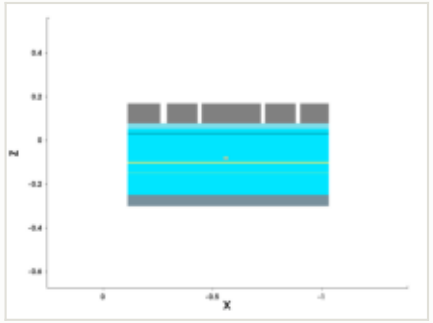

mask for this step

no mask for this step

steps by process area

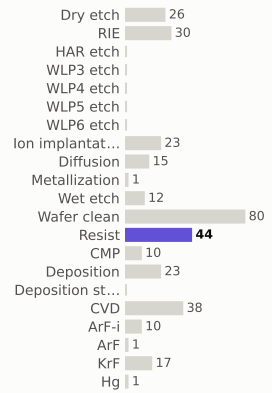

materials deposited (g)



gases emitted (g)

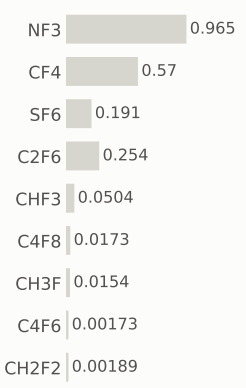

Step #4390: ArF-i

litho_patterning · ArF-i

0.217	205.4	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

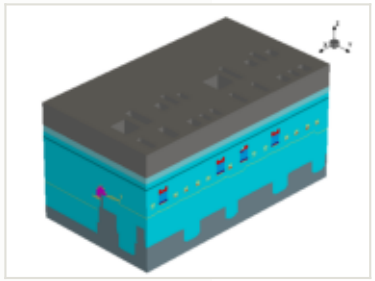

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

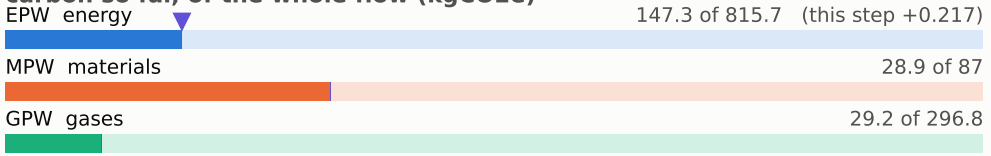

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

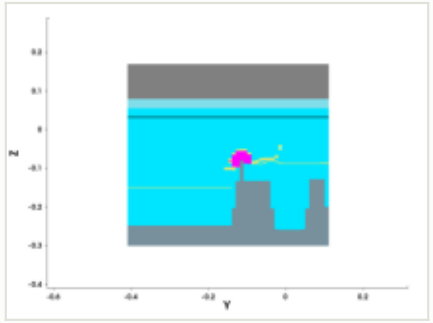

y cut at -0.150 µm

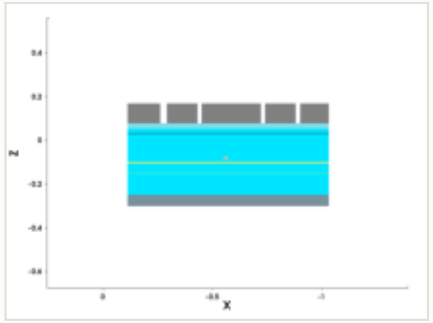

mask: layer 2017:0 (GDSII)

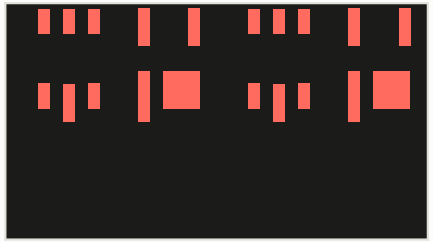

steps by process area

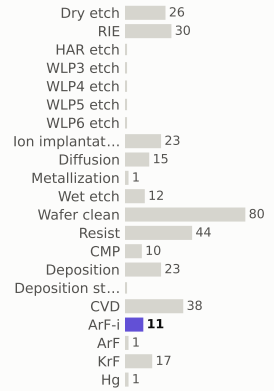

materials deposited (g)



gases emitted (g)

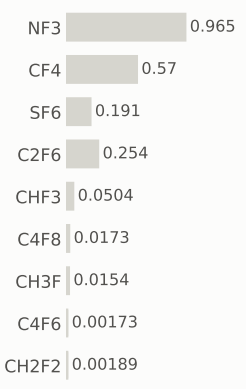

Step #4400: Spx_only

etch_anisotropic · Spx_only

0	205.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

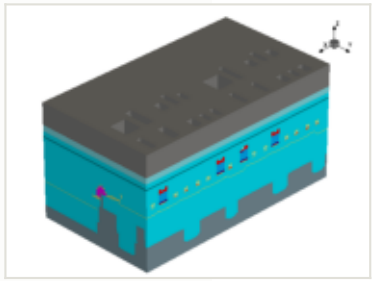

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 147.3 of 815.7

MPW materials 28.9 of 87

GPW gases 29.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

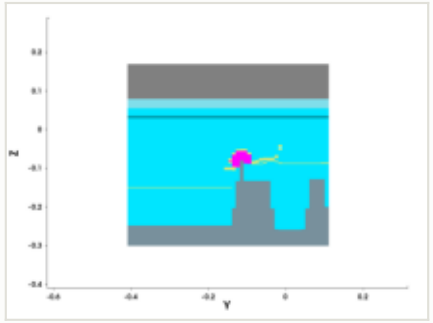

y cut at -0.150 µm

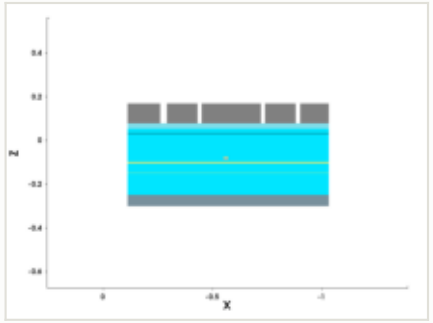

mask for this step

no mask for this step

steps by process area

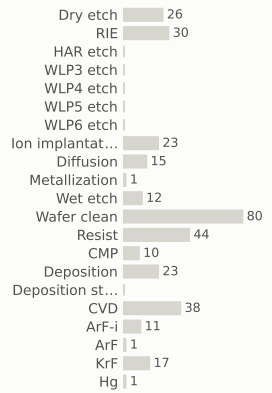

materials deposited (g)

gases emitted (g)

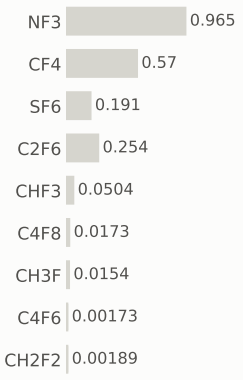

Step #4410: RIE

etch_anisotropic · RIE

1.04	206.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

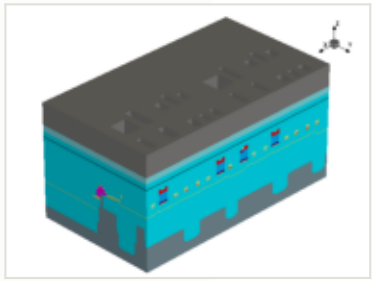

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

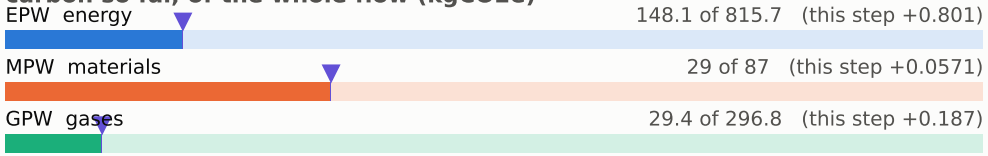

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

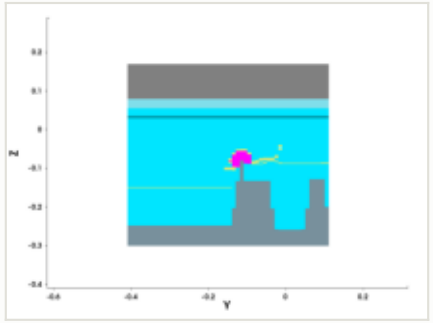

y cut at -0.150 µm

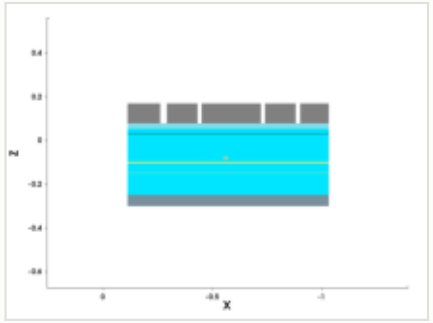

mask for this step

no mask for this step

steps by process area

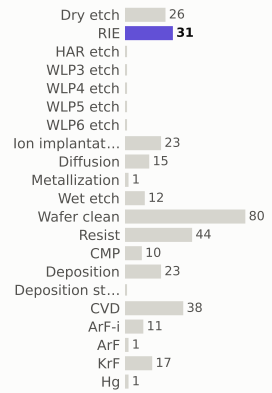

materials deposited (g)

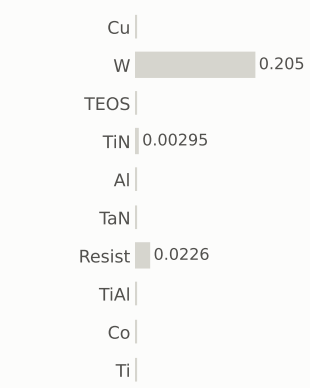

gases emitted (g)

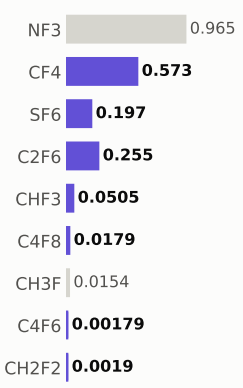

Step #4420: Spx_only

etch_anisotropic · Spx_only

0	206.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

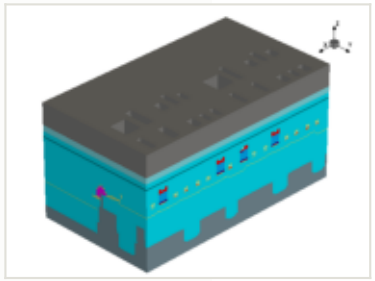

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

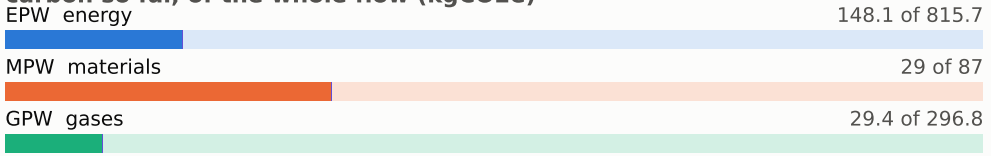

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

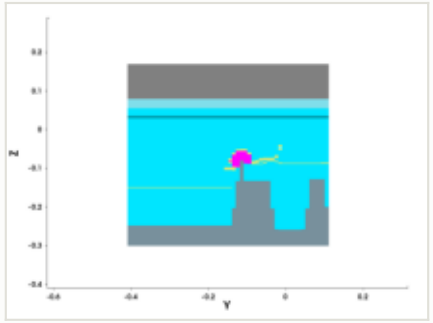

y cut at -0.150 µm

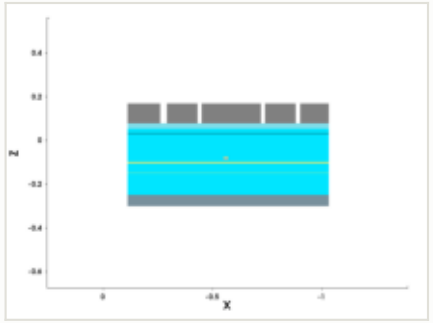

mask for this step

no mask for this step

steps by process area

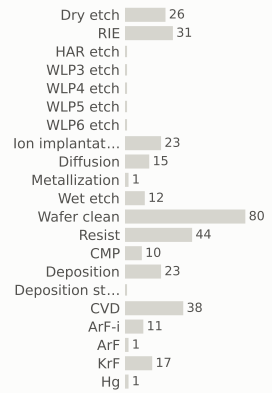

materials deposited (g)



gases emitted (g)

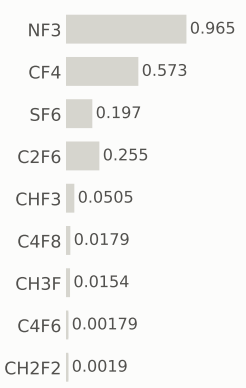

Step #4430: Spx_only

etch_strip · Spx_only

0	206.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

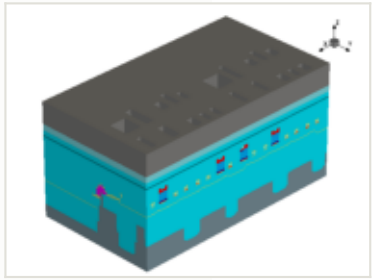

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

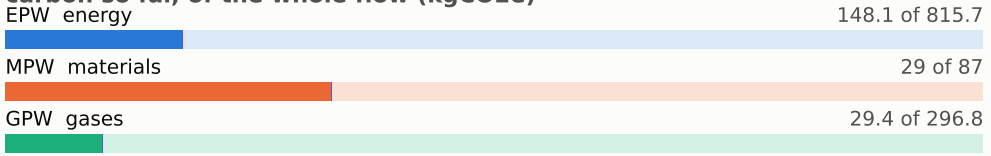

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

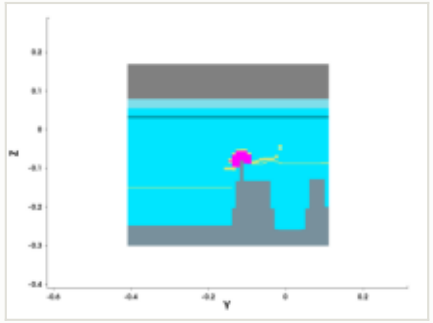

y cut at -0.150 µm

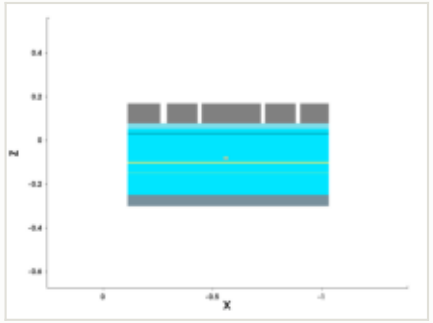

mask for this step

no mask for this step

steps by process area

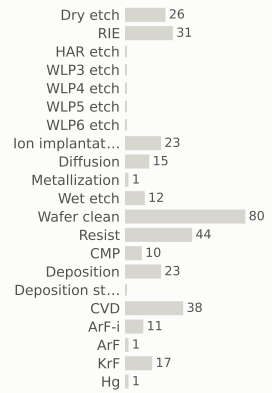

materials deposited (g)

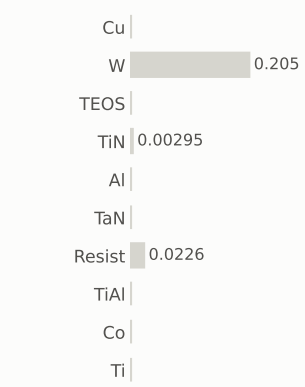

gases emitted (g)

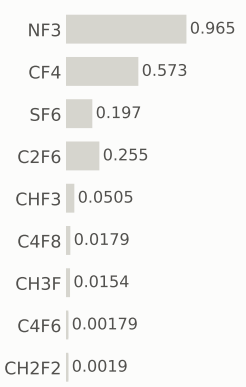

Step #4440: Wafer_clean

clean · Wafer_clean

0.169	206.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

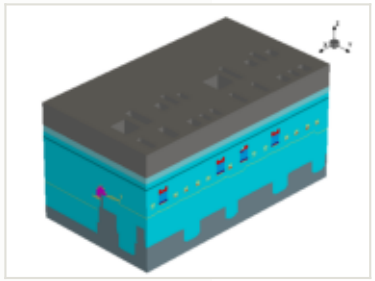

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

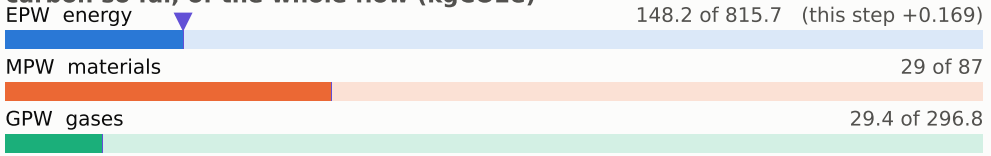

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

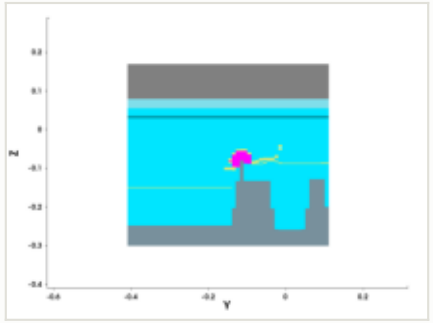

y cut at -0.150 µm

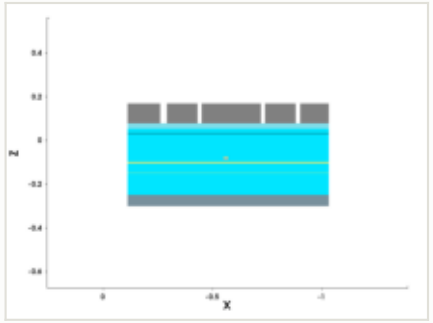

mask for this step

no mask for this step

steps by process area

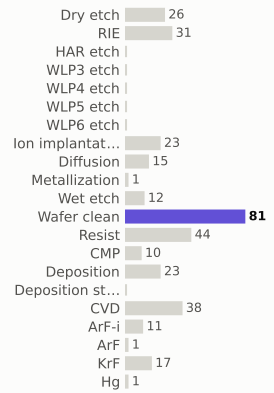

materials deposited (g)

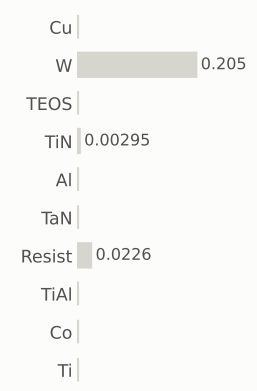

gases emitted (g)

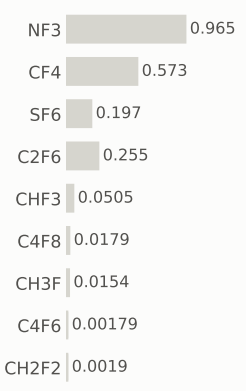

Step #4450: Resist

depo_fill · Resist

0.169	206.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

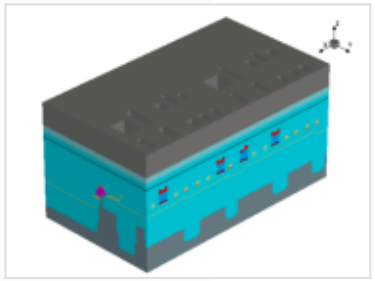

this step

process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

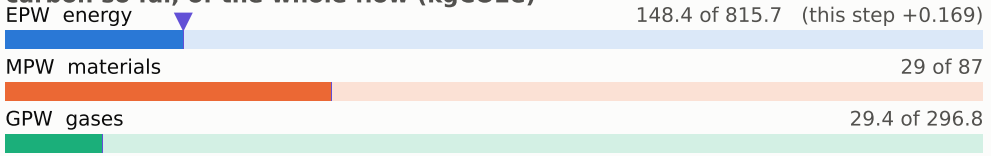

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

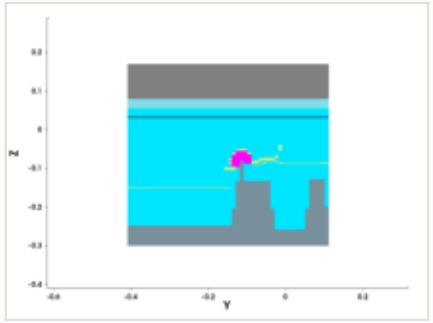

y cut at -0.150 µm

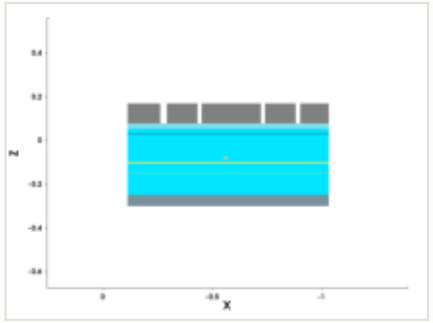

mask for this step

no mask for this step

steps by process area

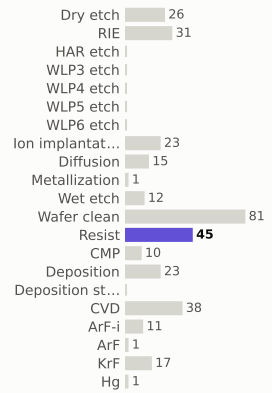

materials deposited (g)



gases emitted (g)

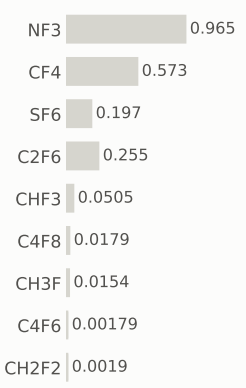

Step #4460: CVD

depo_fill · CVD

1.31	208.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

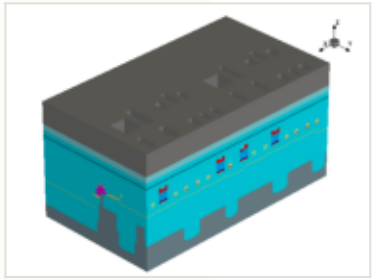

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

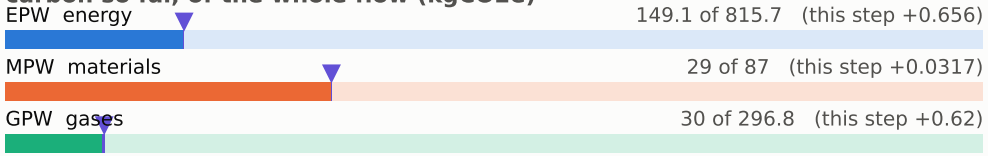

x cut at -0.570 µm

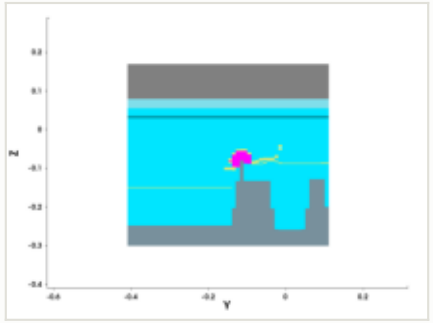

y cut at -0.150 µm

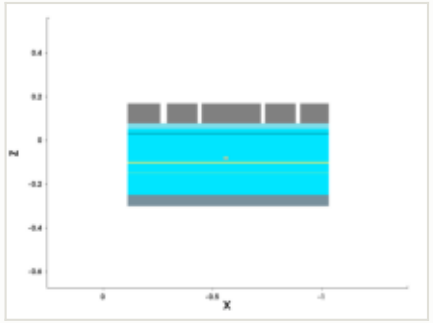

mask for this step

no mask for this step

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

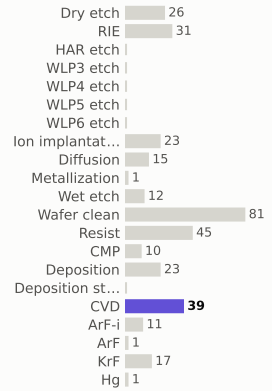

materials deposited (g)



gases emitted (g)

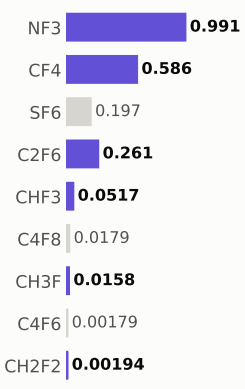

Step #4470: Wafer_clean

clean · Wafer_clean

0.169	208.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

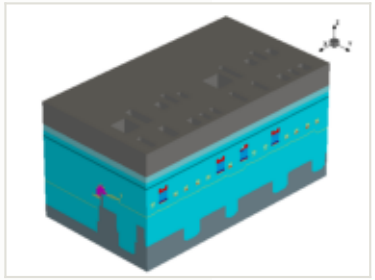

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

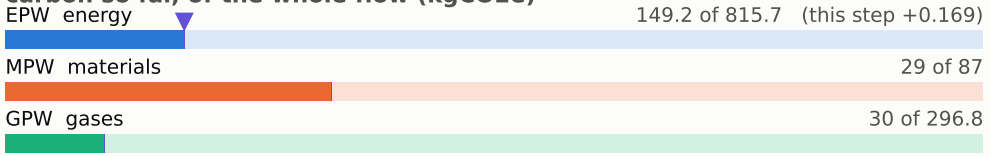

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

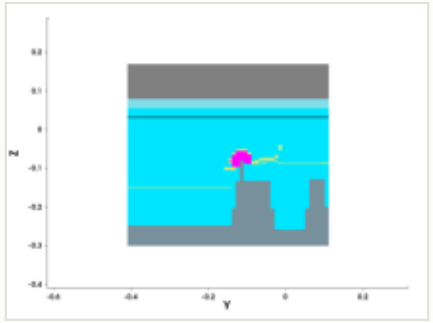

y cut at -0.150 µm

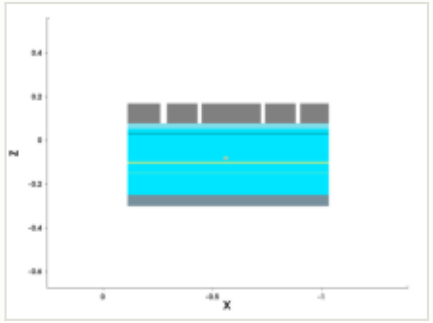

mask for this step

no mask for this step

steps by process area

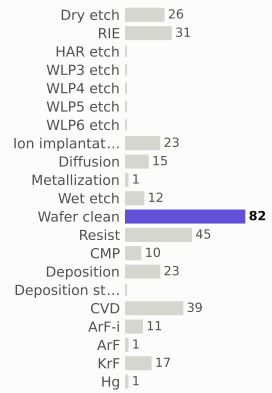

materials deposited (g)

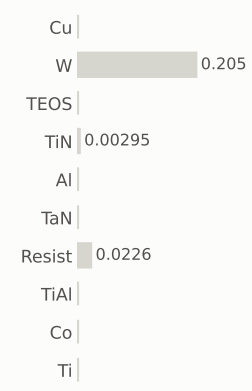

gases emitted (g)

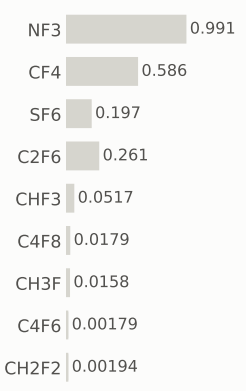

Step #4480: Resist

resist · Resist

0.169	208.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

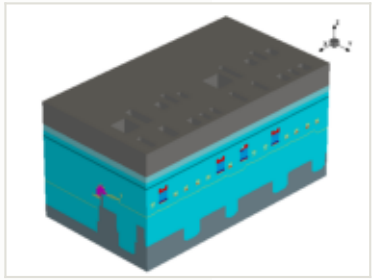

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

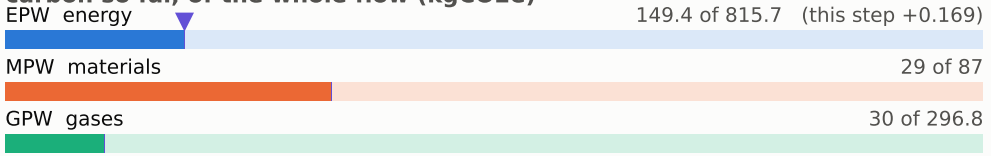

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

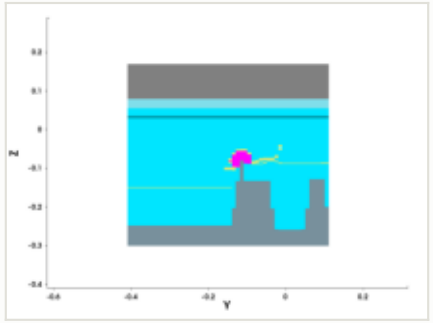

y cut at -0.150 µm

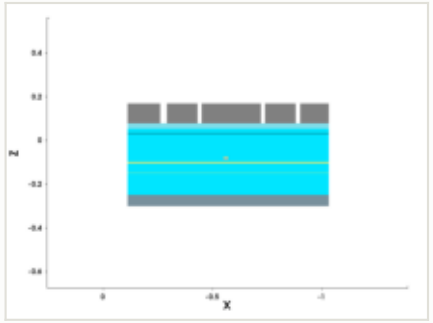

mask for this step

no mask for this step

steps by process area

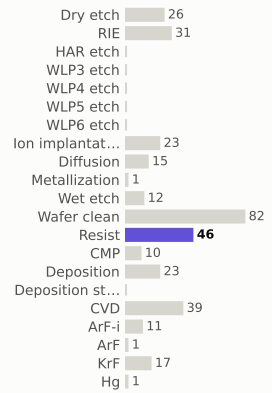

materials deposited (g)

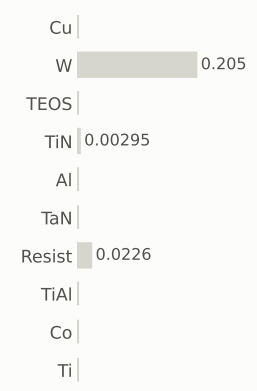

gases emitted (g)

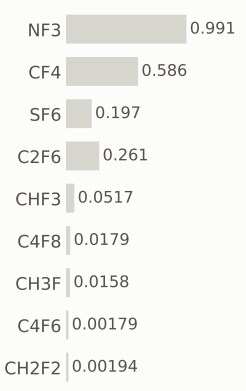

Step #4490: ArF-i

litho_patterning · ArF-i

0.217	208.6	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

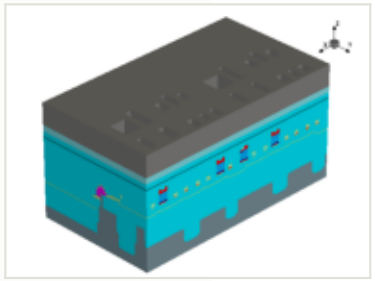

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

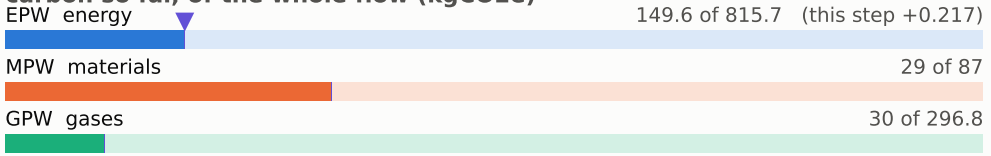

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

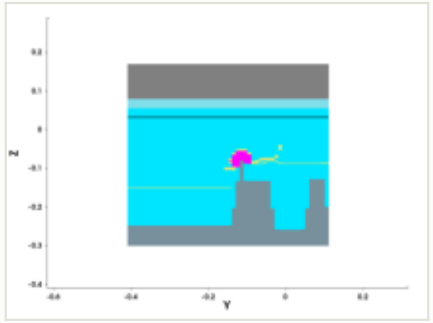

y cut at -0.150 µm

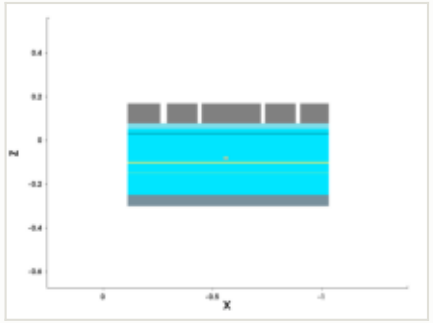

mask: layer 2017:0 (GDSII)

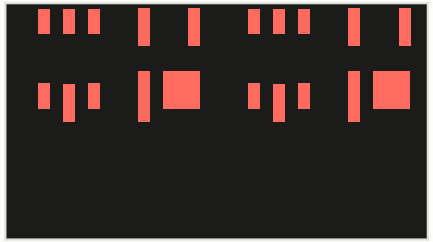

steps by process area

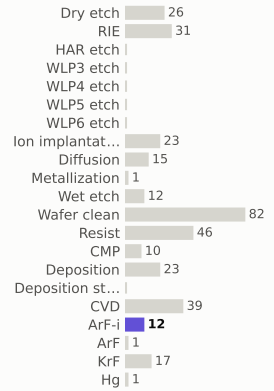

materials deposited (g)

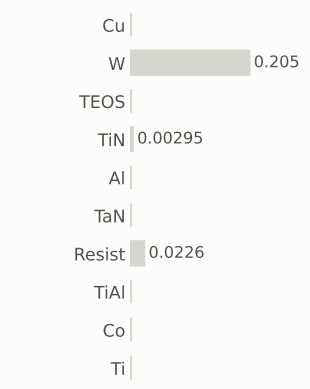

gases emitted (g)

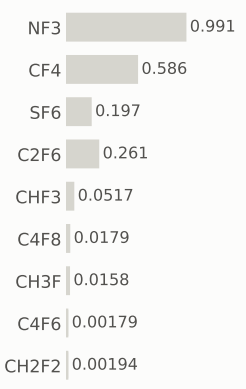

Step #4500: Spx_only

etch_anisotropic · Spx_only

0	208.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

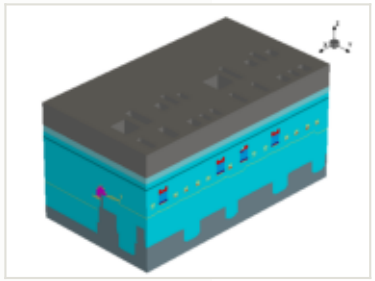

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 149.6 of 815.7

MPW materials 29 of 87

GPW gases 30 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

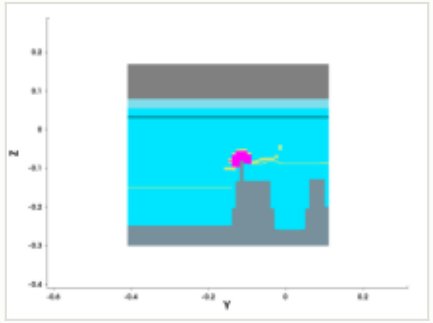

y cut at -0.150 µm

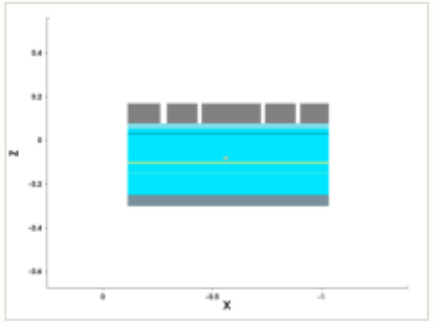

mask for this step

no mask for this step

steps by process area

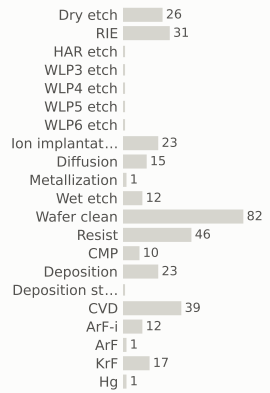

materials deposited (g)

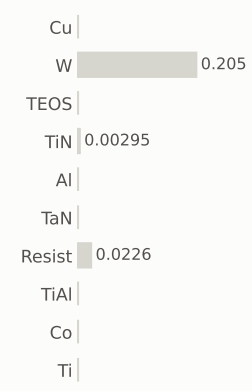

gases emitted (g)

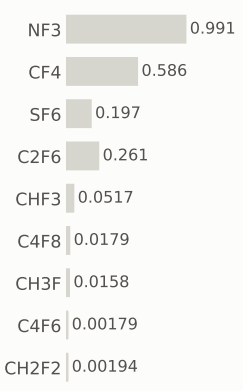

Step #4510: RIE

etch_anisotropic · RIE

1.04	209.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

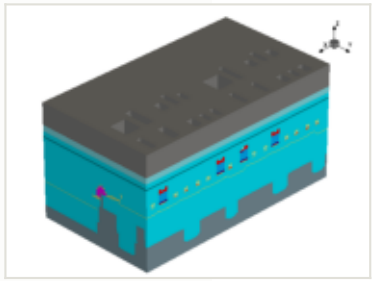

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

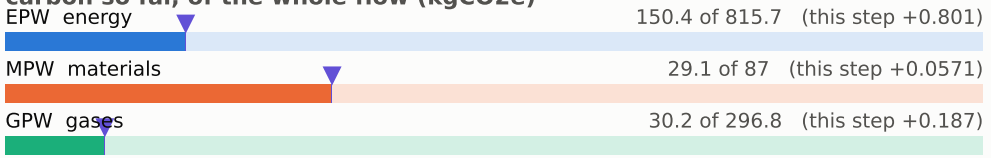

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

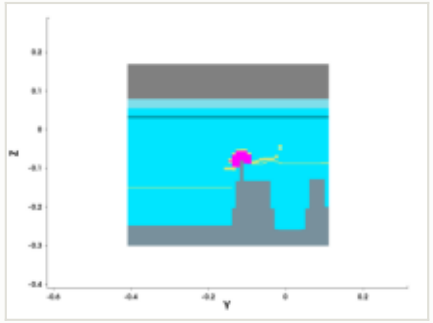

y cut at -0.150 µm

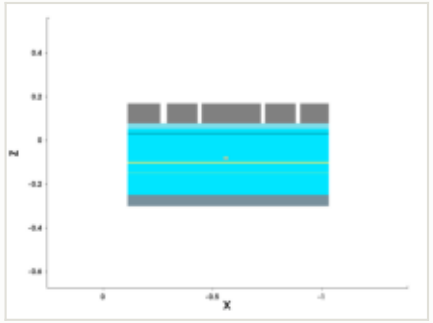

mask for this step

no mask for this step

steps by process area

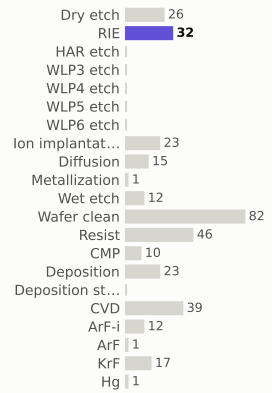

materials deposited (g)

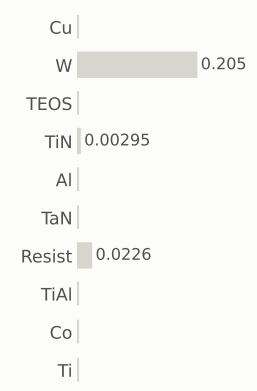

gases emitted (g)

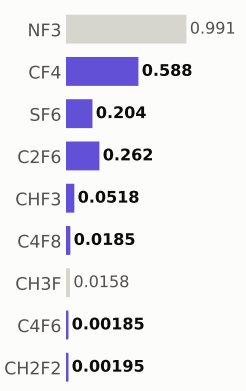

Step #4520: Spx_only

etch_anisotropic · Spx_only

0	209.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

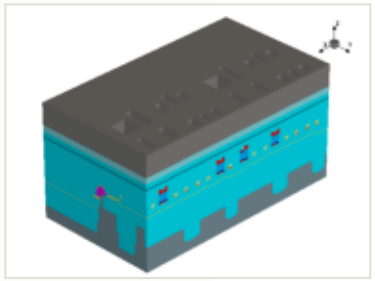

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 150.4 of 815.7

MPW materials 29.1 of 87

GPW gases 30.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

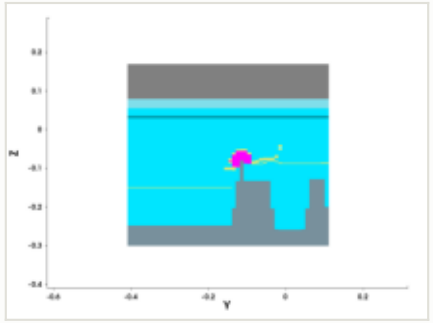

y cut at -0.150 µm

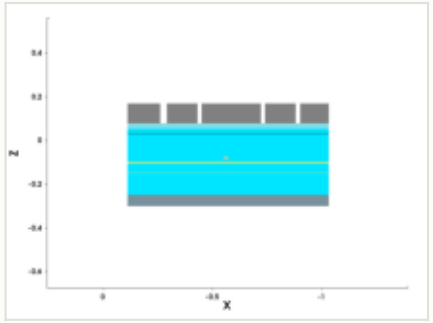

mask for this step

no mask for this step

steps by process area

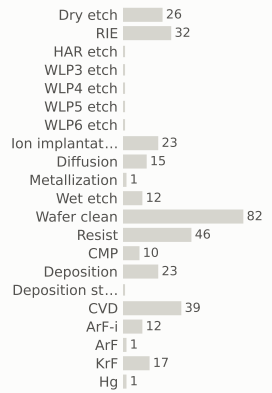

materials deposited (g)

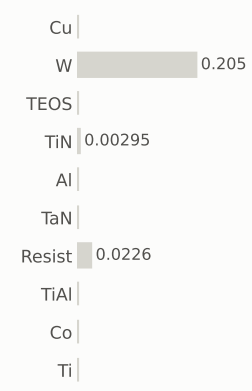

gases emitted (g)

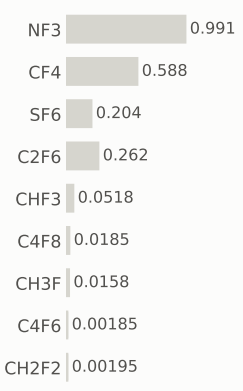

Step #4530: Spx_only

etch_strip · Spx_only

0	209.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

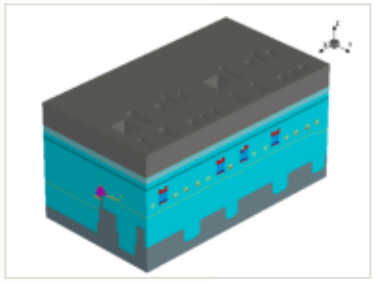

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

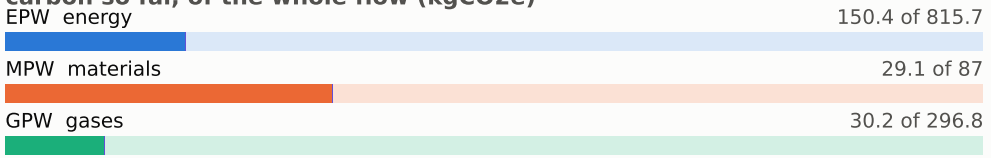

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

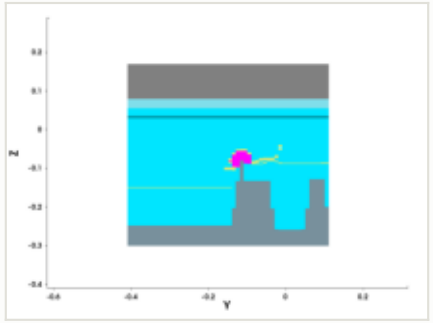

y cut at -0.150 µm

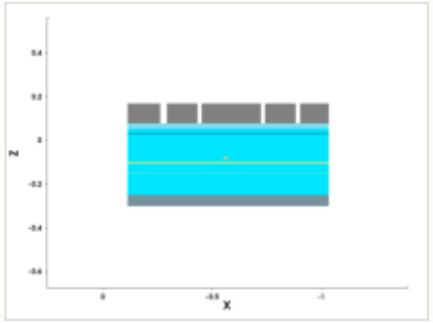

mask for this step

no mask for this step

steps by process area

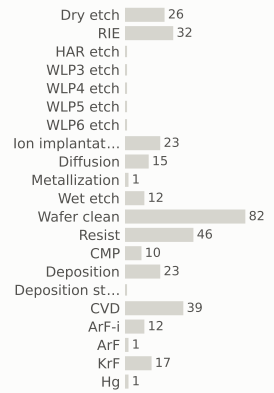

materials deposited (g)

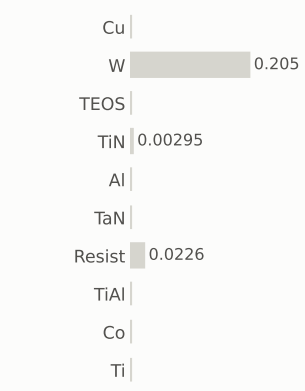

gases emitted (g)

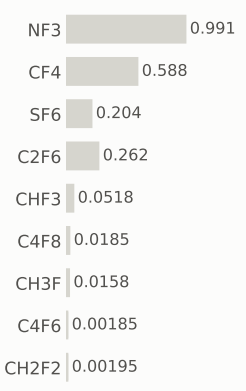

Step #4540: Wafer_clean

clean · Wafer_clean

0.169	209.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

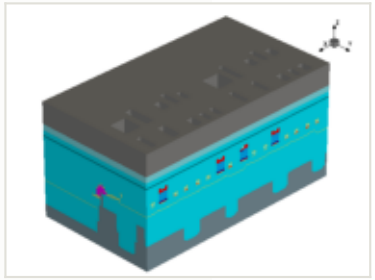

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

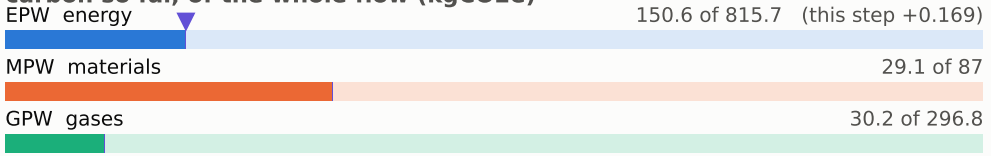

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

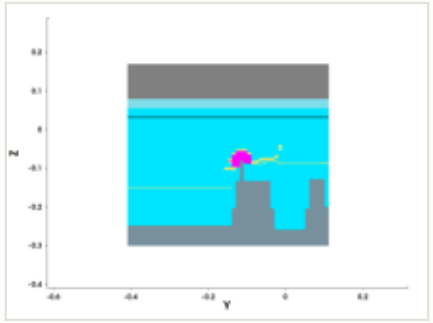

y cut at -0.150 µm

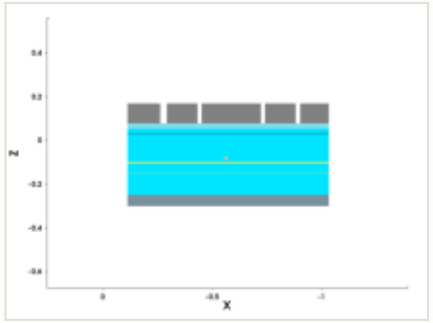

mask for this step

no mask for this step

steps by process area

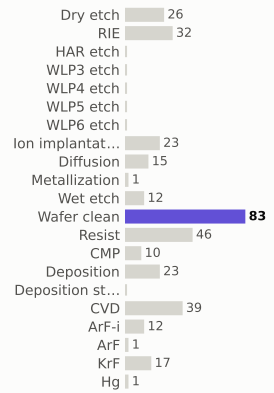

materials deposited (g)

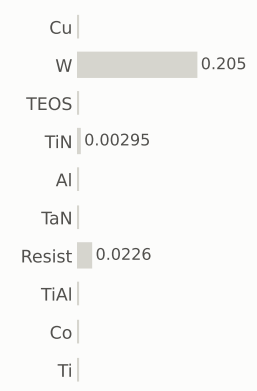

gases emitted (g)

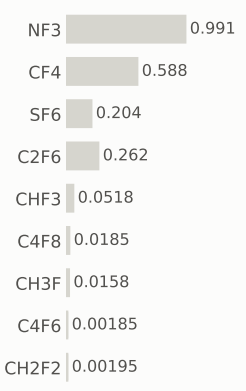

Step #4550: Resist

depo_fill · Resist

0.169	210.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

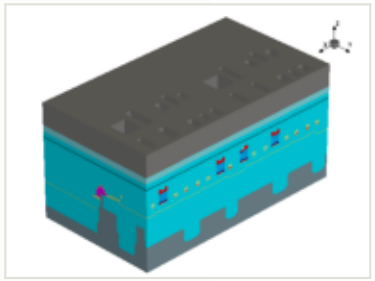

this step

process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

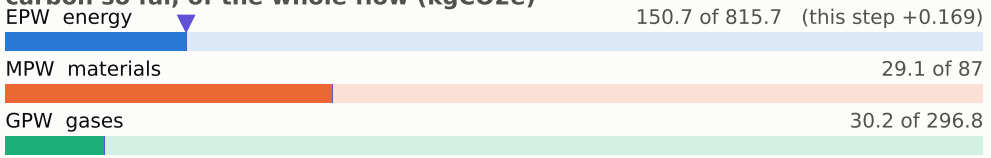

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

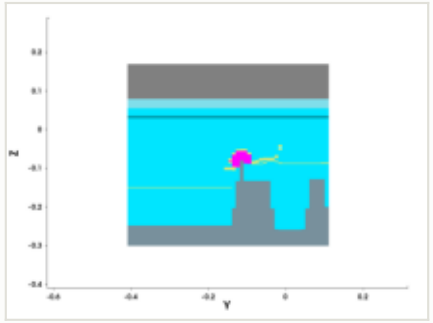

y cut at -0.150 µm

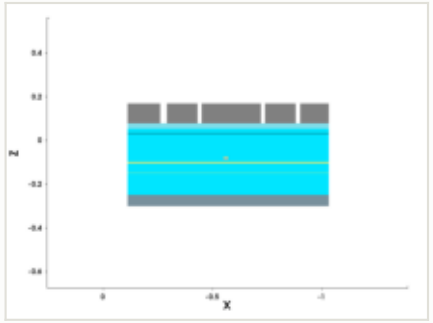

mask for this step

no mask for this step

steps by process area

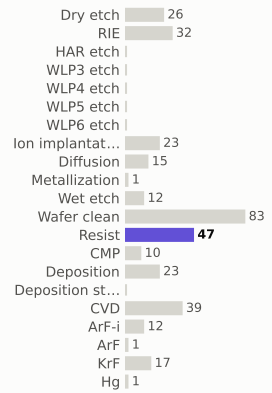

materials deposited (g)

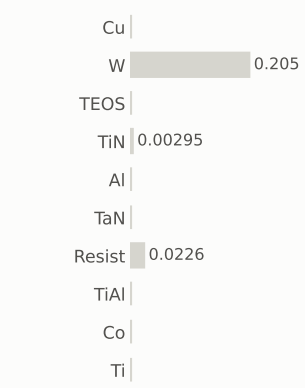

gases emitted (g)

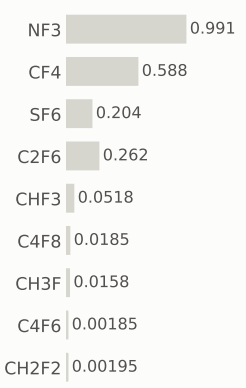

Step #4560: CVD

depo_fill · CVD

1.31	211.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

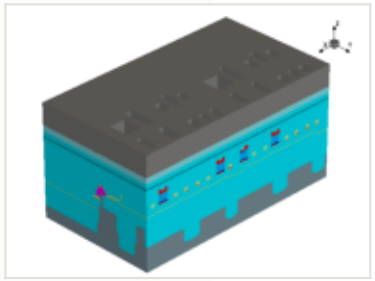

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

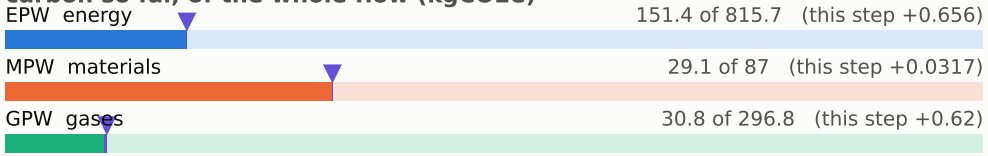

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

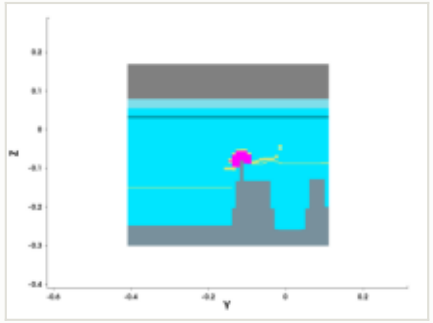

y cut at -0.150 µm

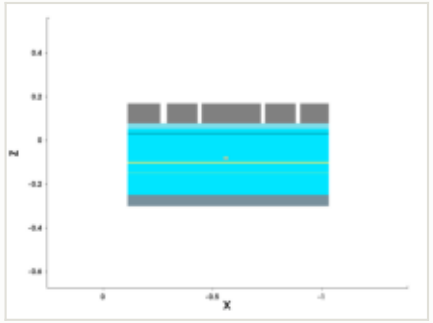

mask for this step

no mask for this step

steps by process area

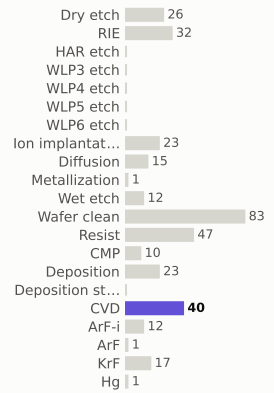

materials deposited (g)

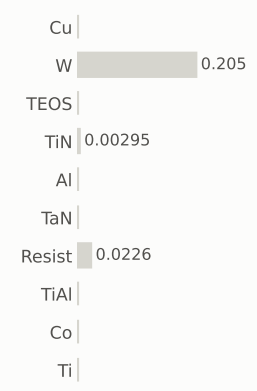

gases emitted (g)

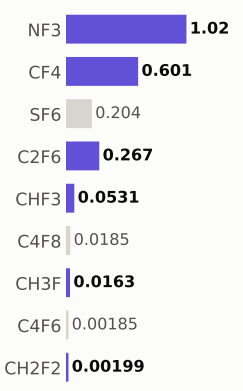

Step #4570: Wafer_clean

clean · Wafer_clean

0.169	211.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

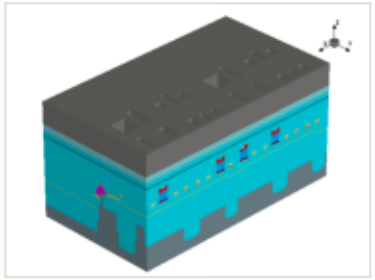

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

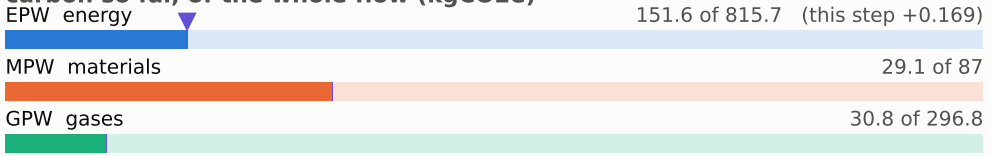

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

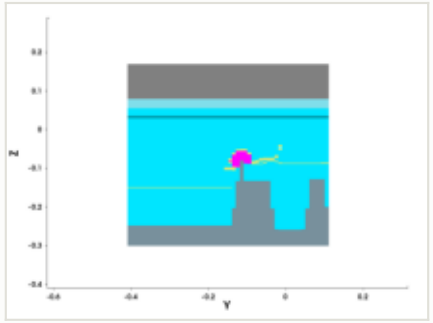

y cut at -0.150 µm

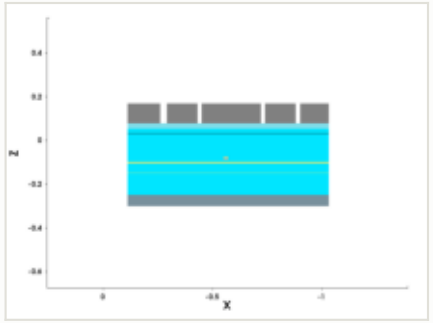

mask for this step

no mask for this step

steps by process area

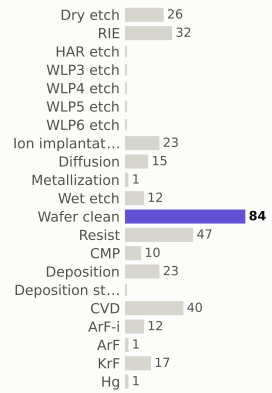

materials deposited (g)



gases emitted (g)

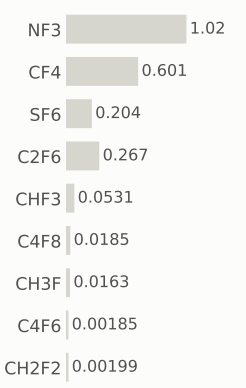

Step #4580: Resist

resist · Resist

0.169	211.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

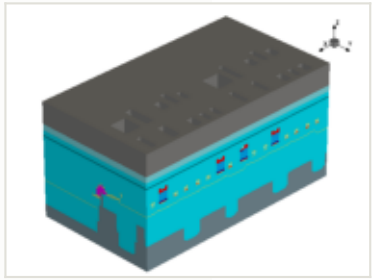

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

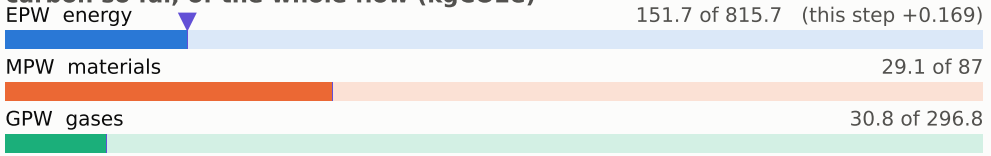

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

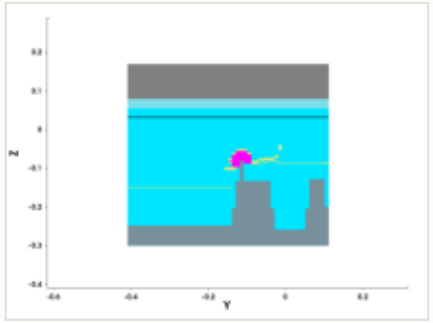

y cut at -0.150 µm

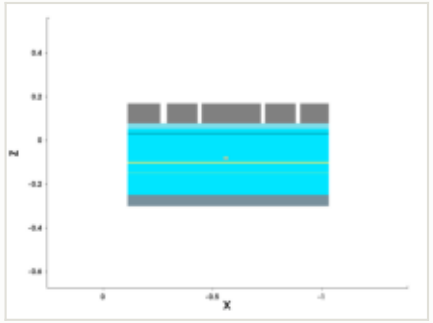

mask for this step

no mask for this step

steps by process area

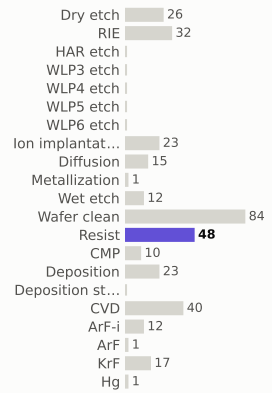

materials deposited (g)

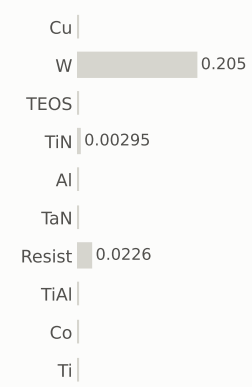

gases emitted (g)



Step #4590: ArF-i

litho_patterning · ArF-i

0.217	211.9	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

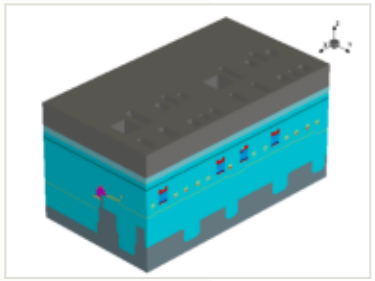

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

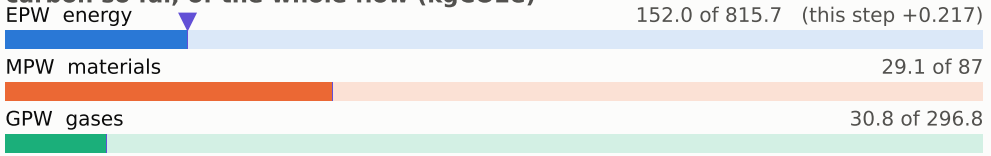

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

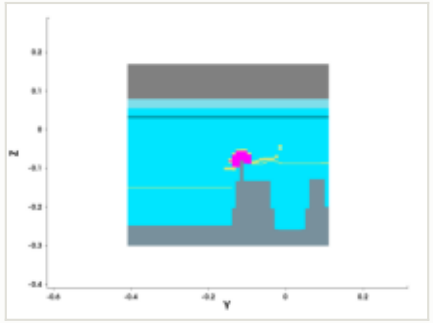

y cut at -0.150 µm

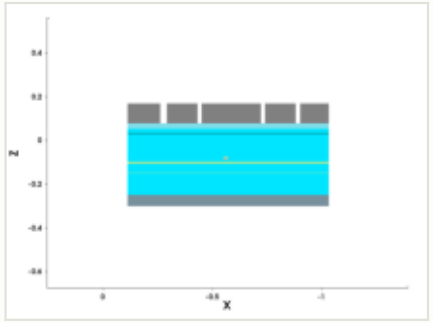

mask: layer 2017:0 (GDSII)

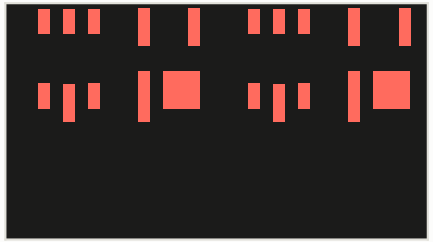

steps by process area

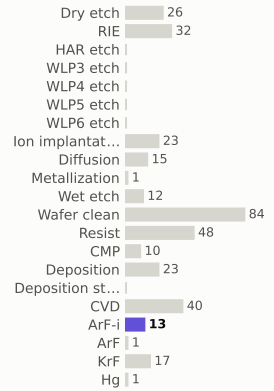

materials deposited (g)



gases emitted (g)

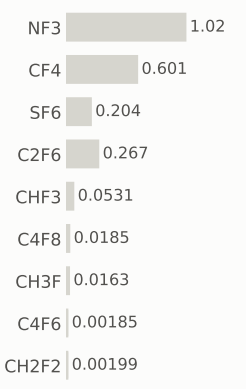

Step #4600: Spx_only

etch_anisotropic · Spx_only

0	211.9	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

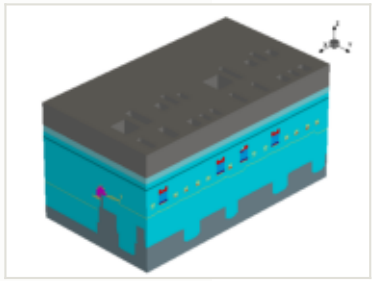

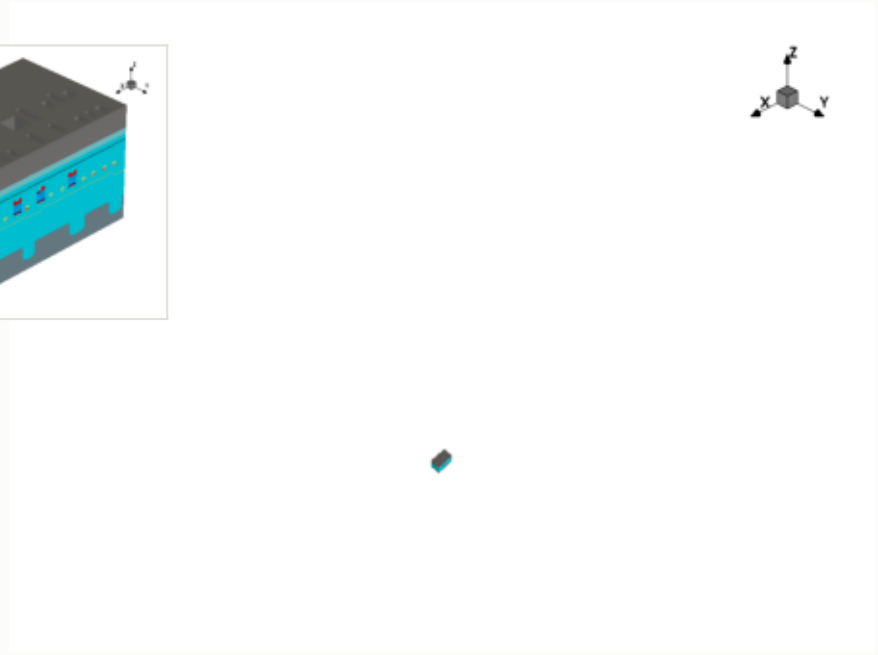

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

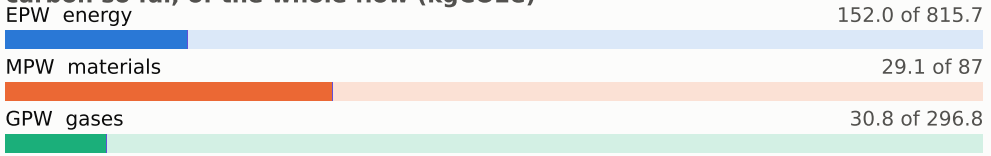

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

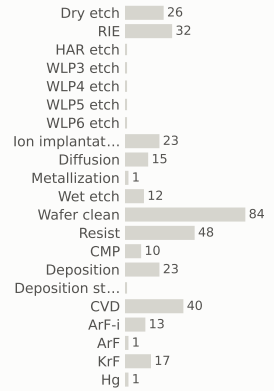

materials deposited (g)



gases emitted (g)

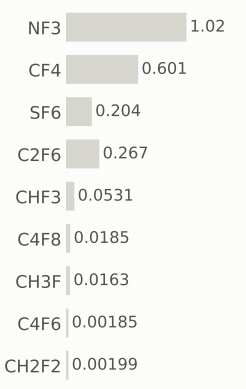

x cut at -0.570 µm

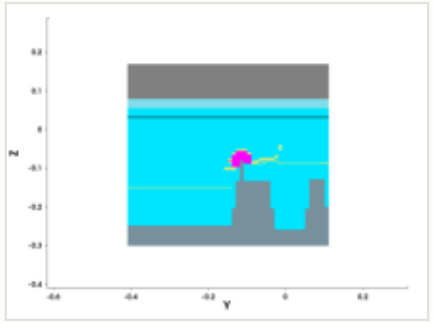

y cut at -0.150 µm

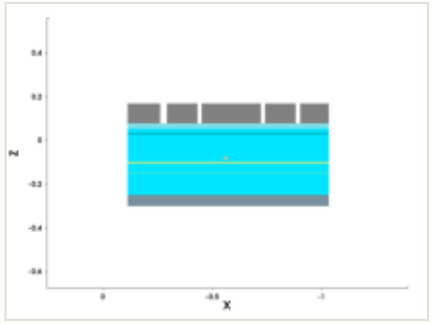

mask for this step

no mask for this step

Step #4610: Spx_only

etch_anisotropic · Spx_only

0	211.9	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

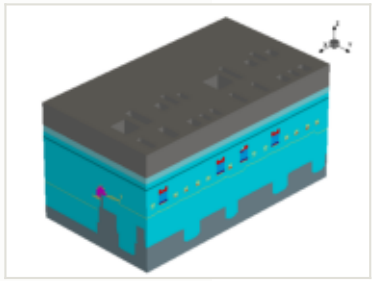

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

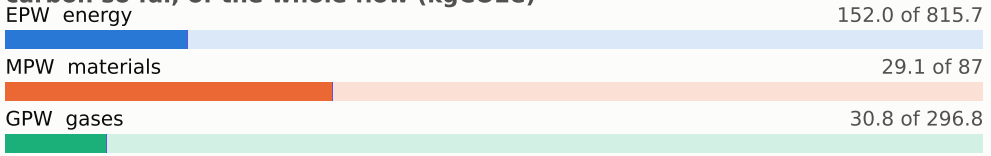

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

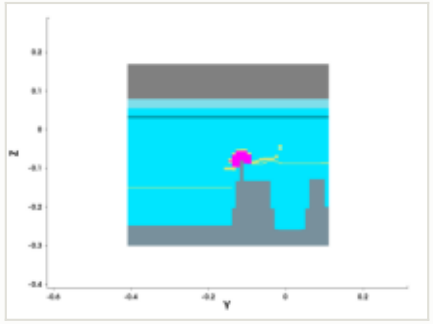

y cut at -0.150 µm

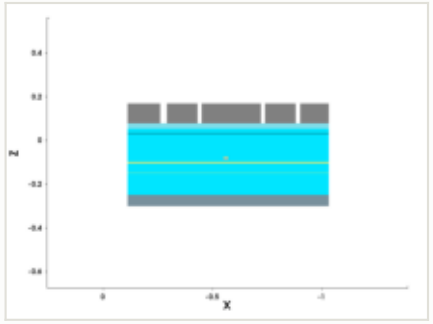

mask for this step

no mask for this step

steps by process area

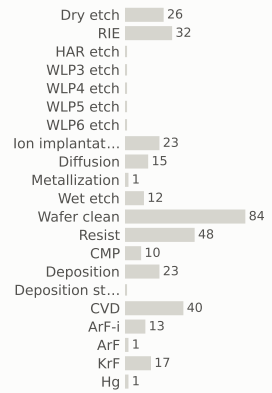

materials deposited (g)

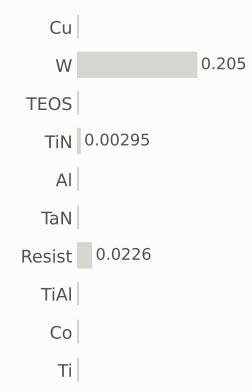

gases emitted (g)

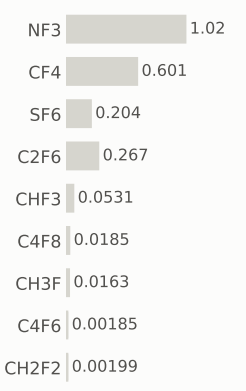

Step #4620: Spx_only

etch_anisotropic · Spx_only

0	211.9	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

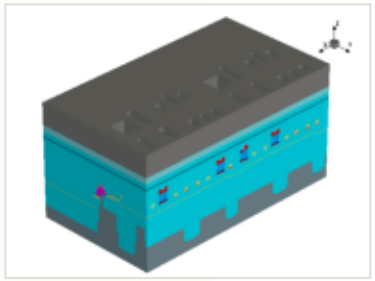

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

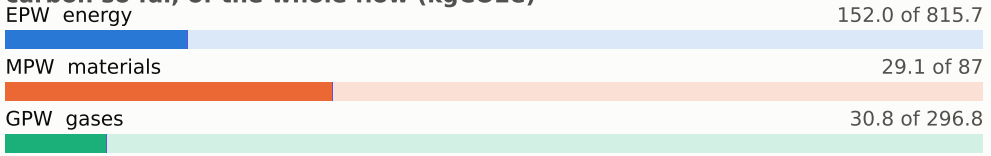

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

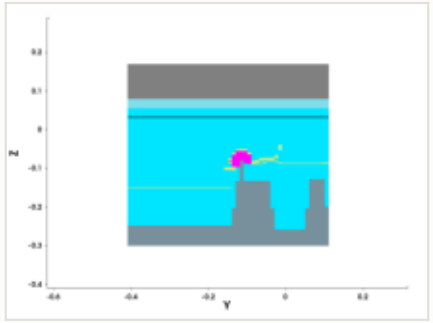

y cut at -0.150 µm

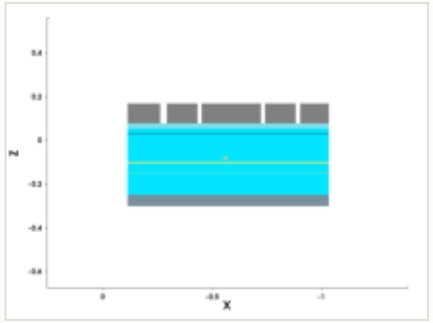

mask for this step

no mask for this step

steps by process area

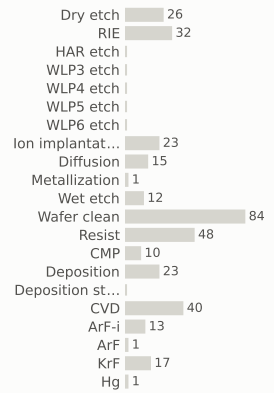

materials deposited (g)

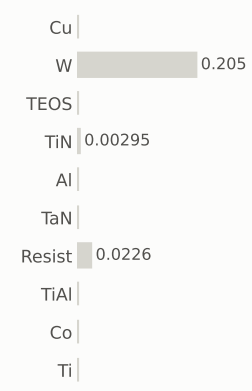

gases emitted (g)

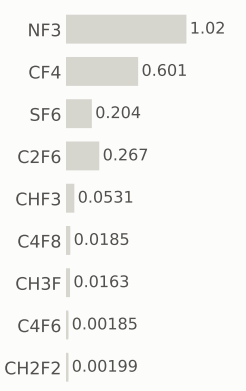

Step #4630: RIE

etch_strip · RIE

1.04	212.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

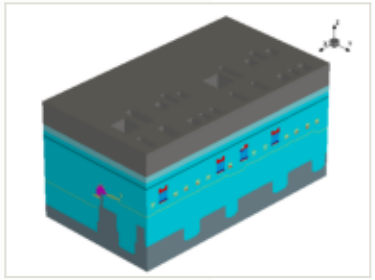

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

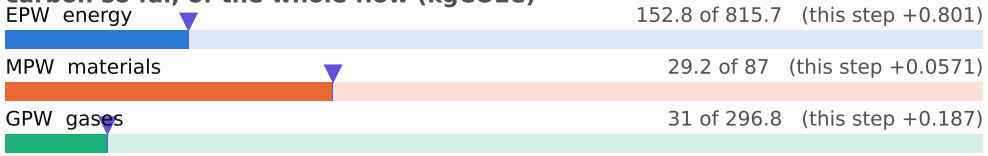

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

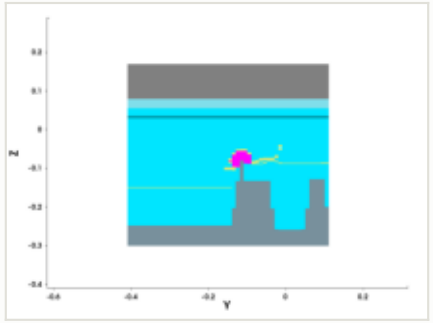

y cut at -0.150 µm

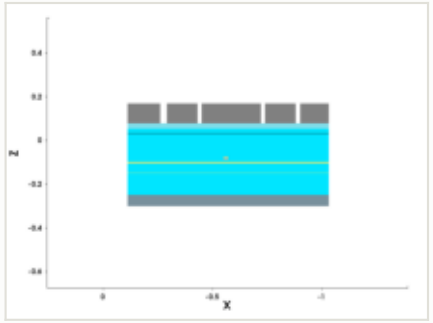

mask for this step

no mask for this step

steps by process area

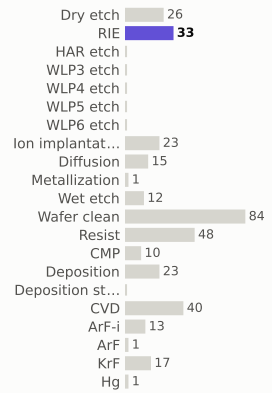

materials deposited (g)

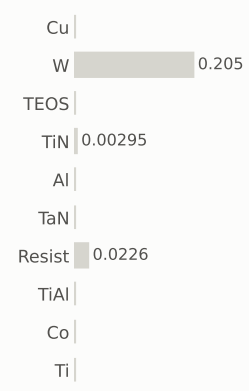

gases emitted (g)

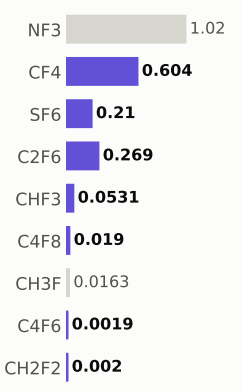

Step #4640: Spx_only

etch_anisotropic · Spx_only

0	212.9	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

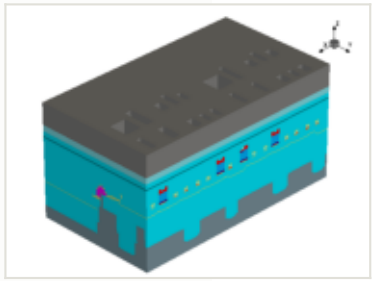

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 152.8 of 815.7

MPW materials 29.2 of 87

GPW gases 31 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

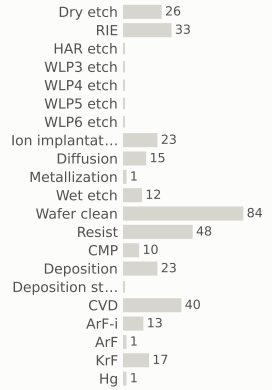

materials deposited (g)

gases emitted (g)

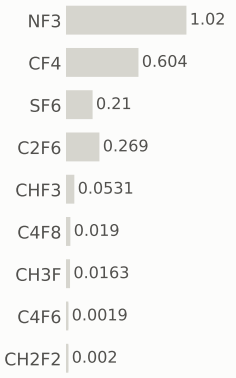

x cut at -0.570 µm

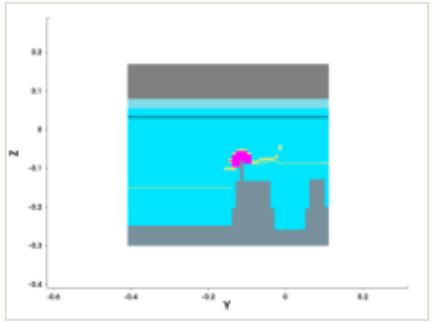

y cut at -0.150 µm

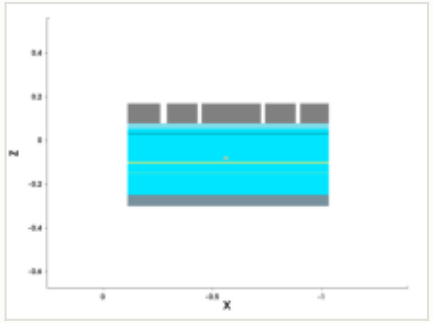

mask for this step

no mask for this step

Step #4650: Wafer_clean

clean · Wafer_clean

0.169	213.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

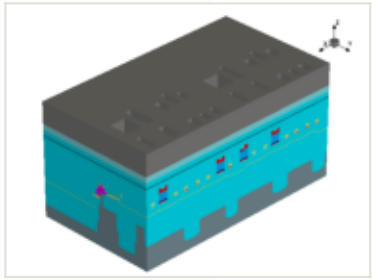

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

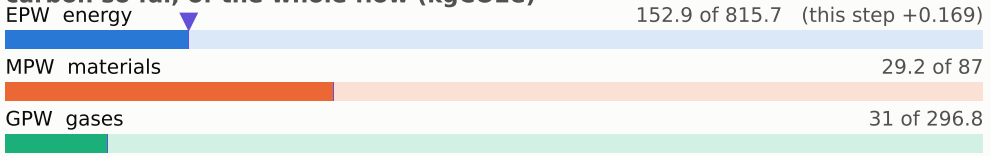

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

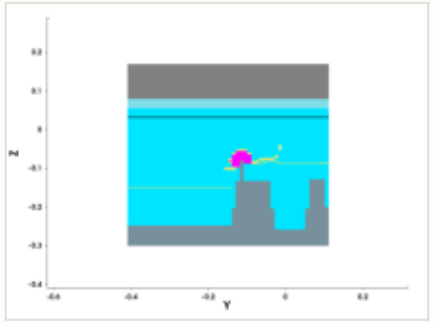

y cut at -0.150 µm

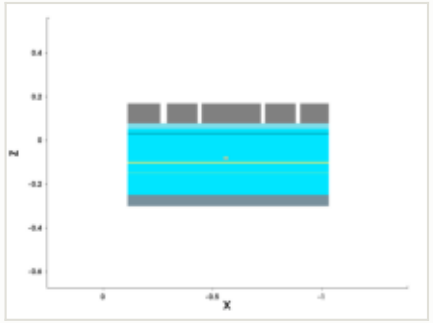

mask for this step

no mask for this step

steps by process area

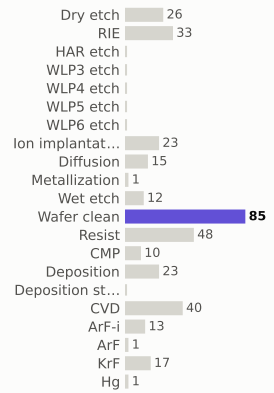

materials deposited (g)

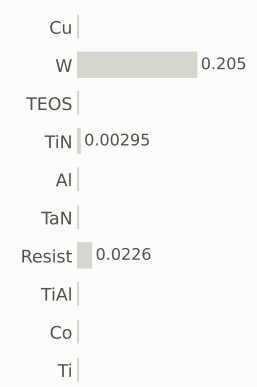

gases emitted (g)



Step #4660: RIE

etch_anisotropic · RIE

1.04	214.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

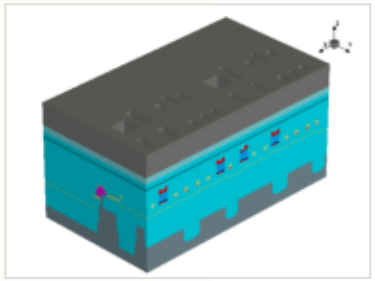

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

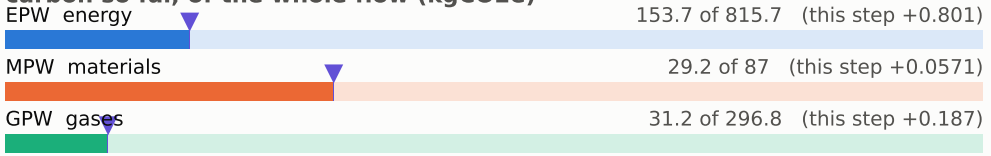

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

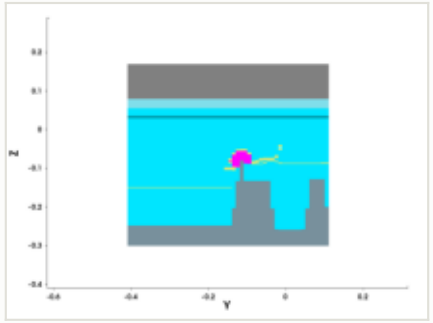

y cut at -0.150 µm

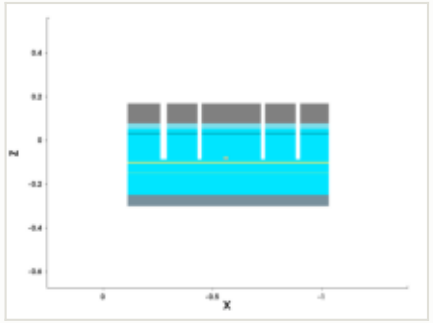

mask for this step

no mask for this step

steps by process area

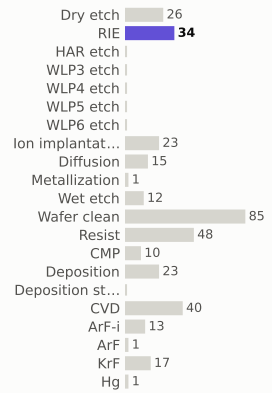

materials deposited (g)

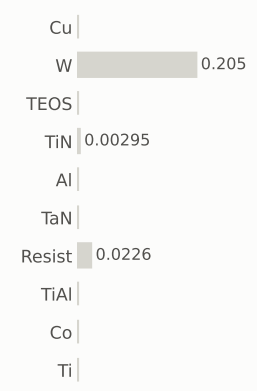

gases emitted (g)

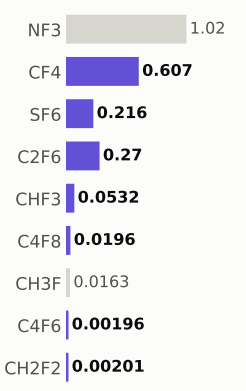

Step #4670: Spx_only

etch_anisotropic · Spx_only

0	214.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

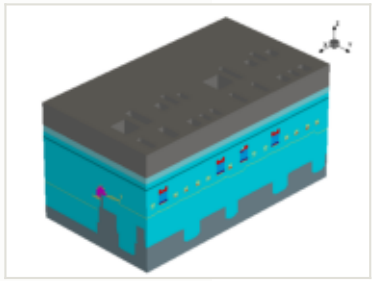

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 153.7 of 815.7

MPW materials 29.2 of 87

GPW gases 31.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

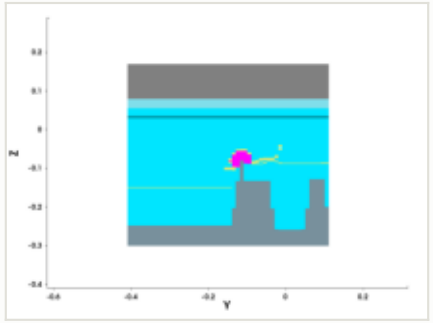

y cut at -0.150 µm

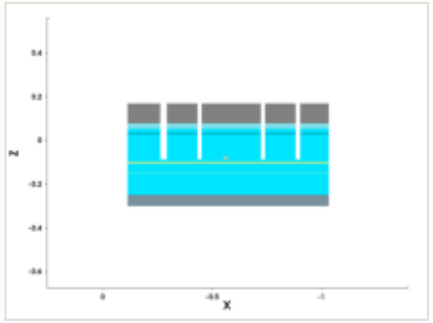

mask for this step

no mask for this step

steps by process area

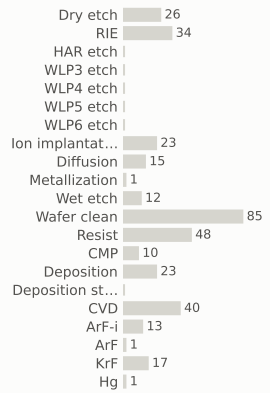

materials deposited (g)

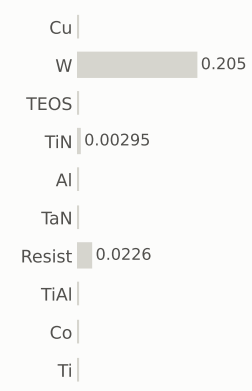

gases emitted (g)

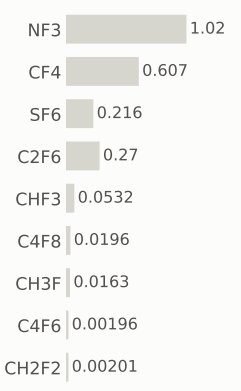

Step #4680: Spx_only

etch_anisotropic · Spx_only

0	214.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

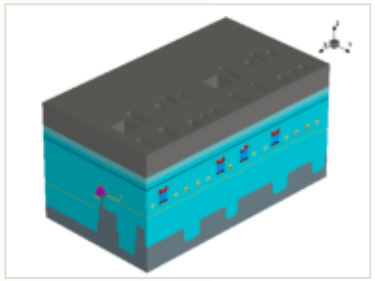

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 153.7 of 815.7

MPW materials 29.2 of 87

GPW gases 31.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

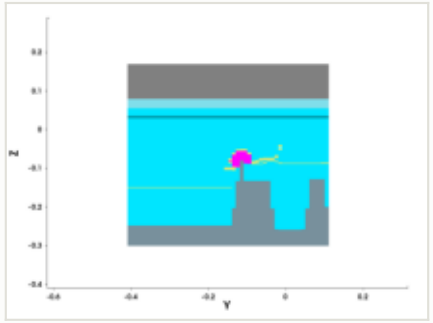

y cut at -0.150 µm

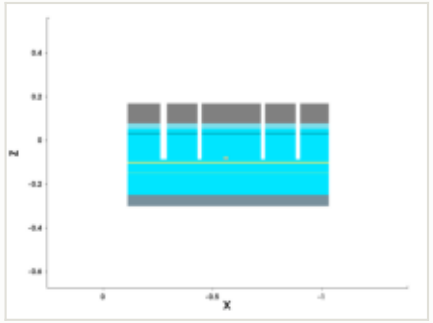

mask for this step

no mask for this step

steps by process area

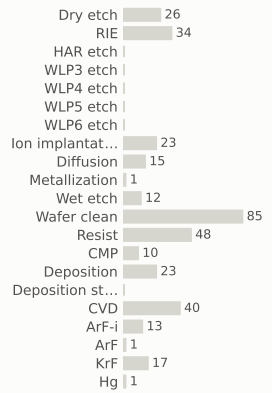

materials deposited (g)

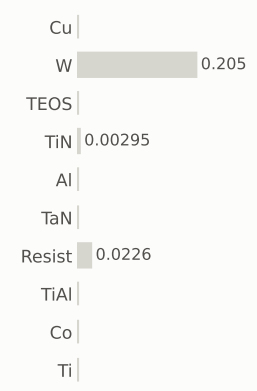

gases emitted (g)

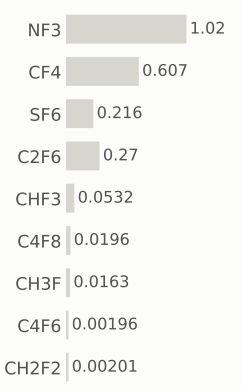

Step #4690: Spx_only

etch_anisotropic · Spx_only

0	214.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

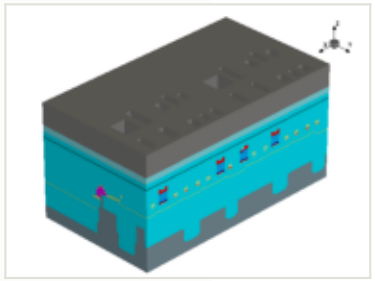

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 153.7 of 815.7

MPW materials 29.2 of 87

GPW gases 31.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

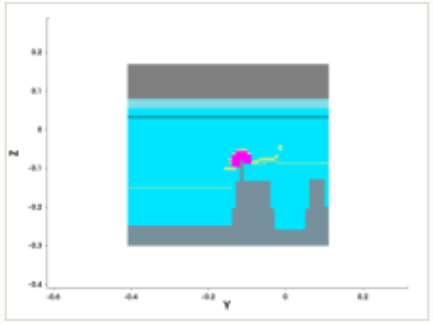

y cut at -0.150 µm

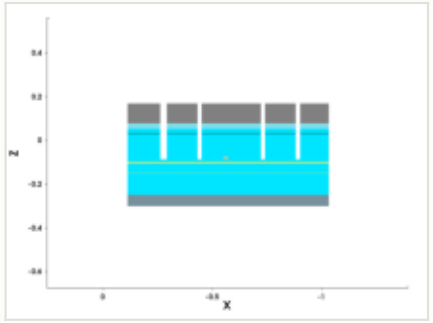

mask for this step

no mask for this step

steps by process area

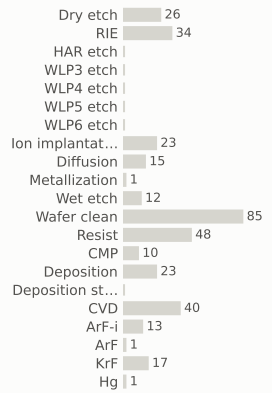

materials deposited (g)

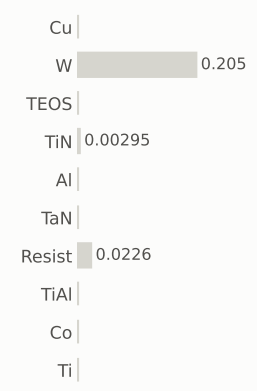

gases emitted (g)

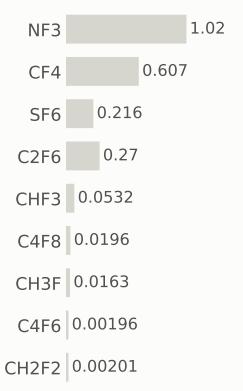

Step #4700: Spx_only

etch_anisotropic · Spx_only

0	214.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

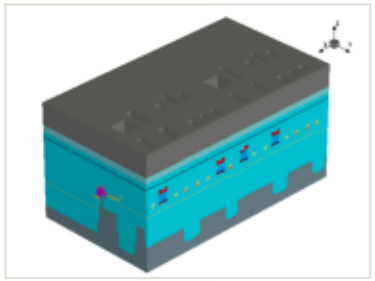

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 153.7 of 815.7

MPW materials 29.2 of 87

GPW gases 31.2 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

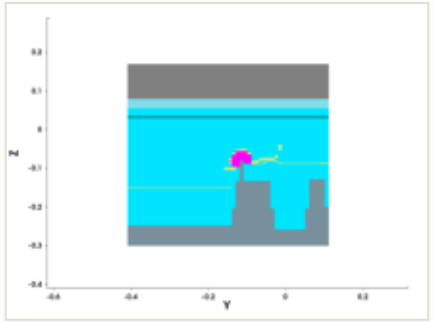

y cut at -0.150 µm

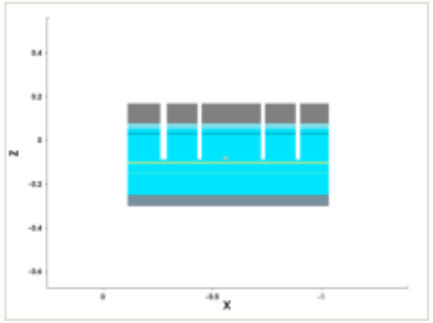

mask for this step

no mask for this step

steps by process area

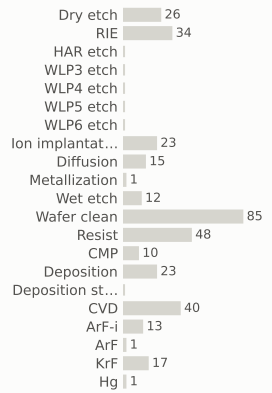

materials deposited (g)

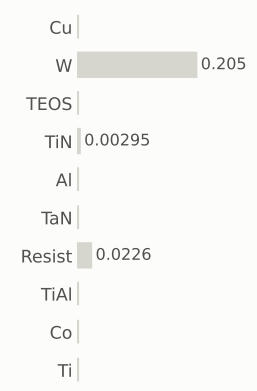

gases emitted (g)

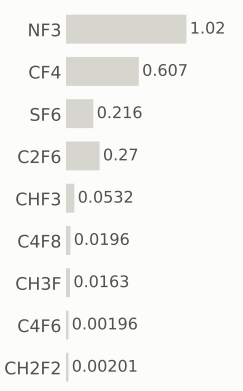

Step #4710: Spx_only

etch_anisotropic · Spx_only

0	214.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

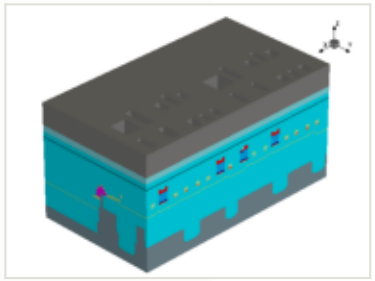

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

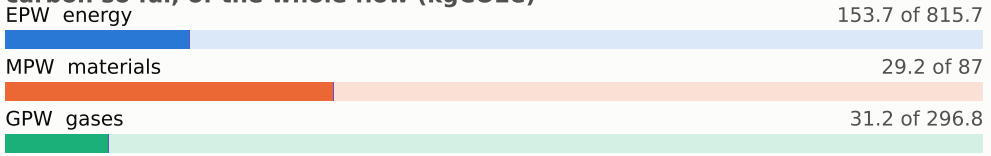

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

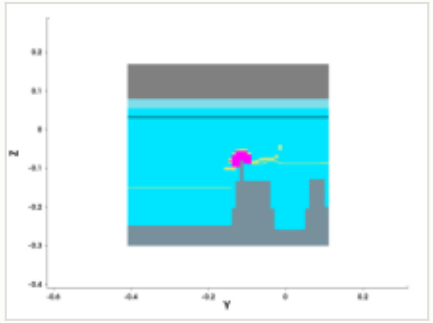

y cut at -0.150 µm

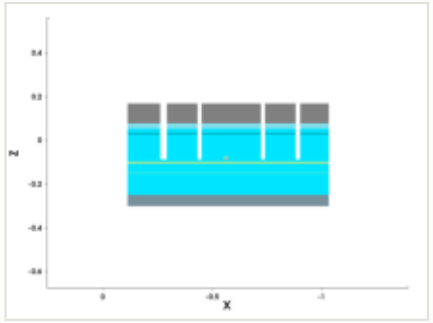

mask for this step

no mask for this step

steps by process area

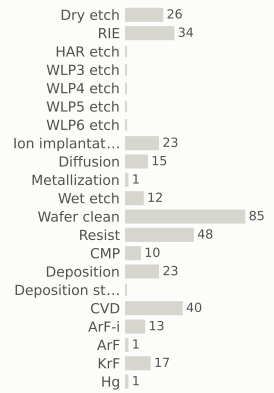

materials deposited (g)

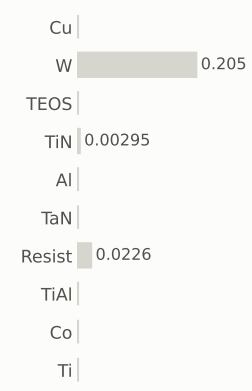

gases emitted (g)

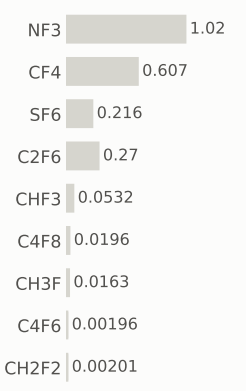

Step #4720: Spx_only

etch_anisotropic · Spx_only

0	214.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

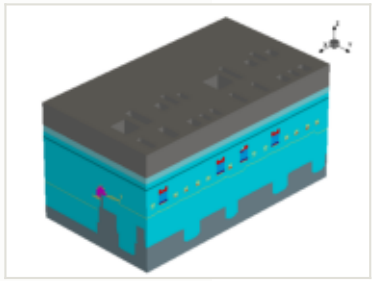

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

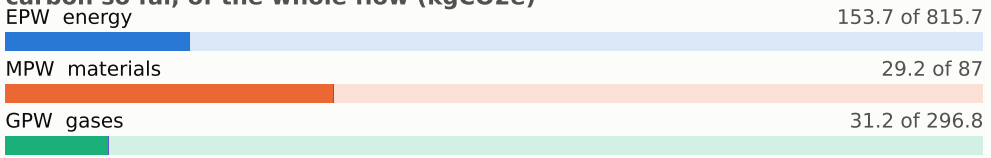

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

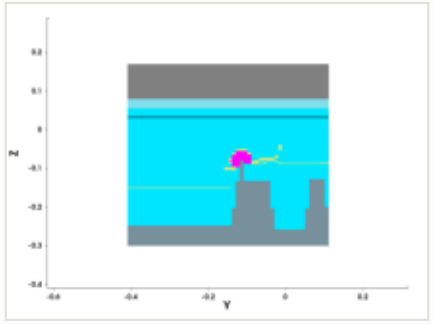

y cut at -0.150 µm

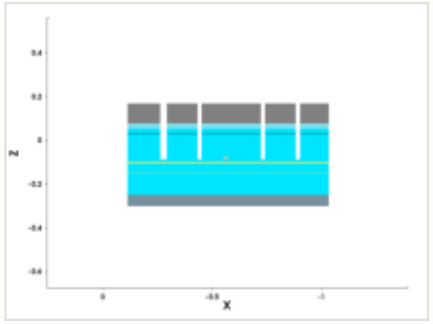

mask for this step

no mask for this step

steps by process area

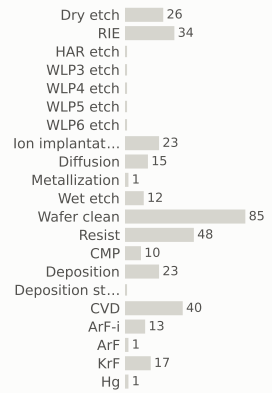

materials deposited (g)

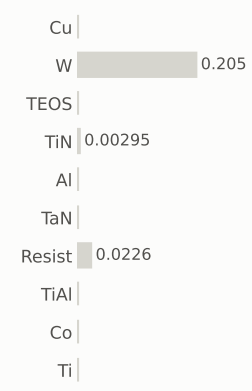

gases emitted (g)

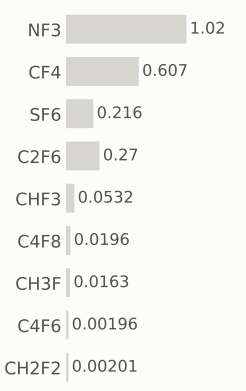

Step #4730: Spx_only

etch_anisotropic · Spx_only

0	214.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

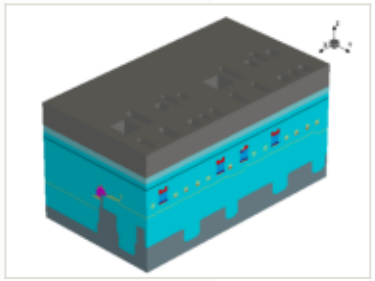

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

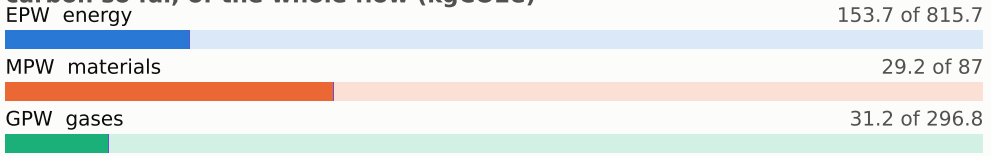

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

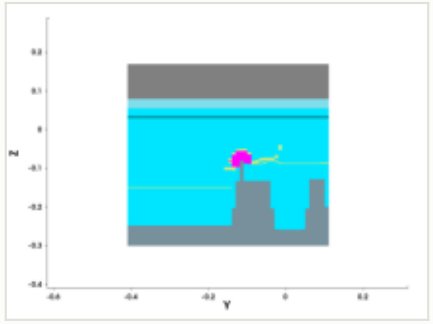

y cut at -0.150 µm

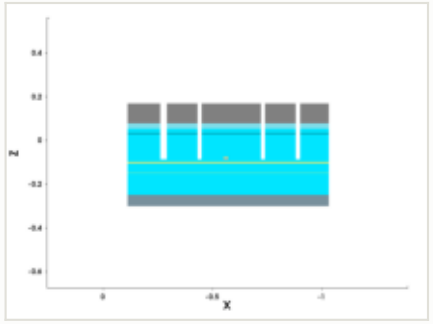

mask for this step

no mask for this step

steps by process area

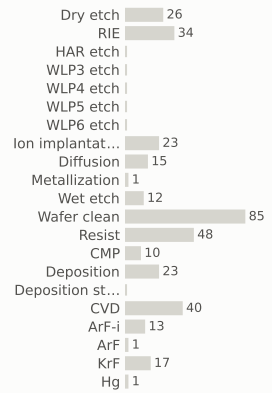

materials deposited (g)

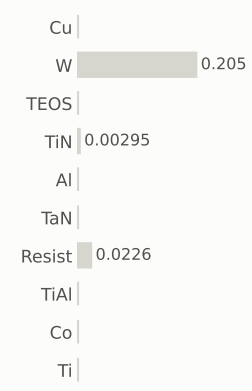

gases emitted (g)

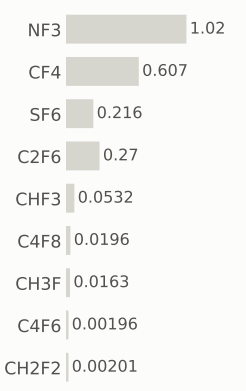

Step #4740: Spx_only

etch_strip · Spx_only

0	214.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

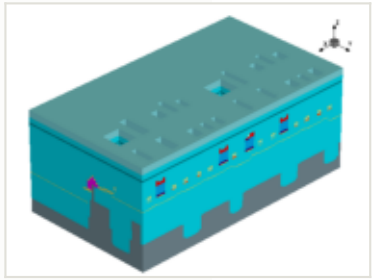

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

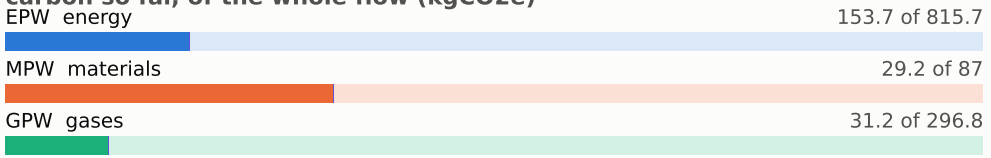

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

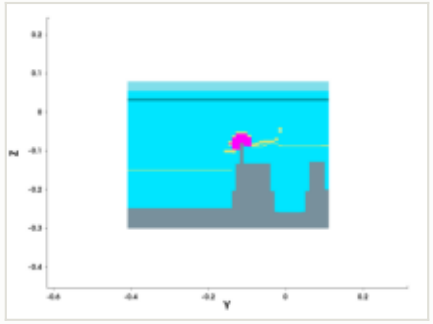

y cut at -0.150 µm

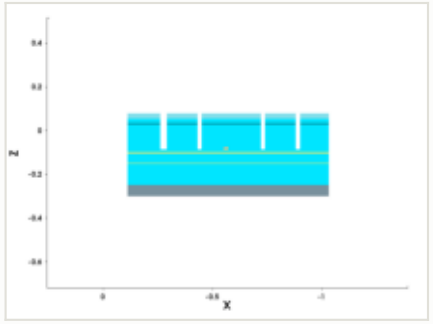

mask for this step

no mask for this step

steps by process area

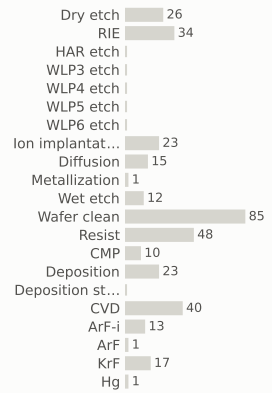

materials deposited (g)

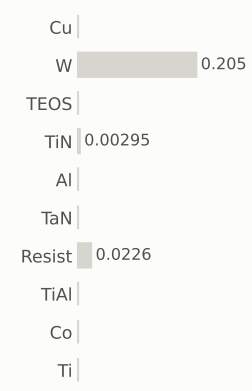

gases emitted (g)

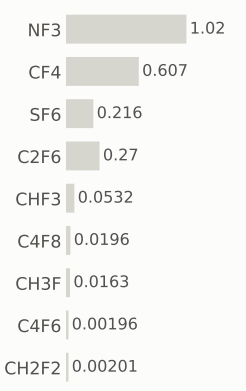

Step #4750: Wafer_clean

clean · Wafer_clean

0.169	214.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

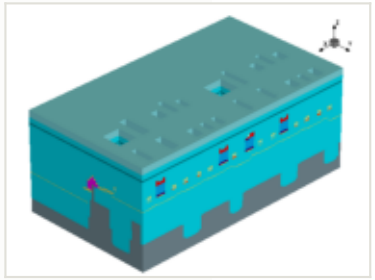

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

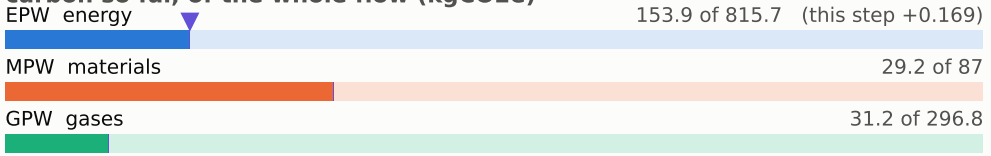

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

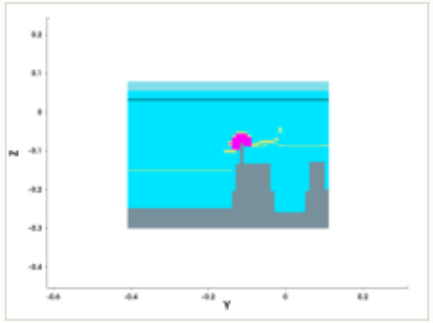

y cut at -0.150 µm

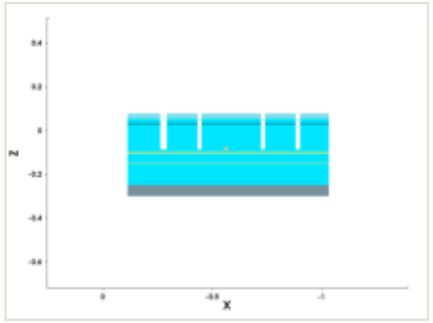

mask for this step

no mask for this step

steps by process area

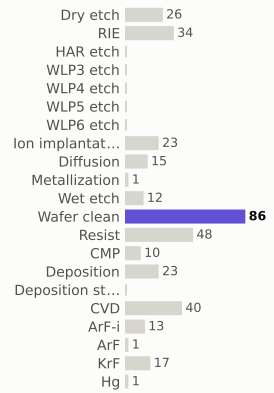

materials deposited (g)

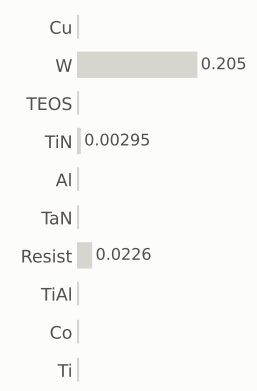

gases emitted (g)

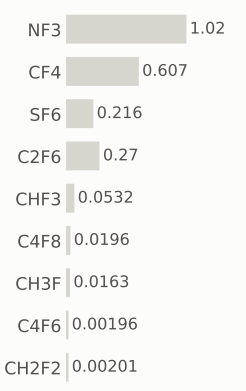

Step #4760: RIE

etch_anisotropic · RIE

1.04	215.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

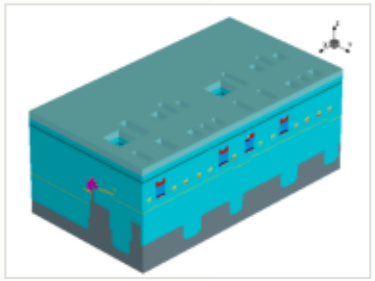

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

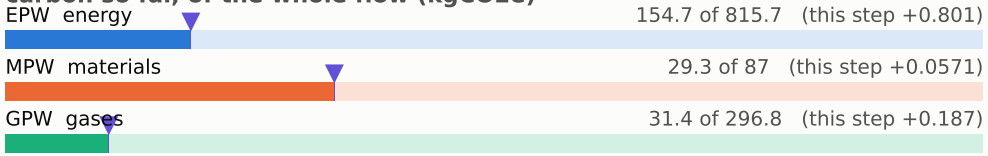

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

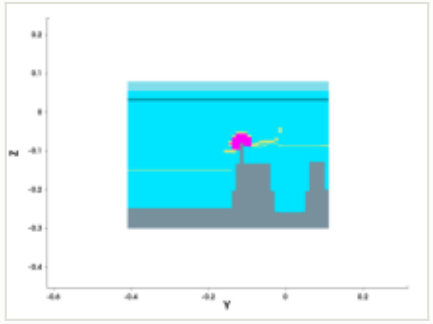

y cut at -0.150 µm

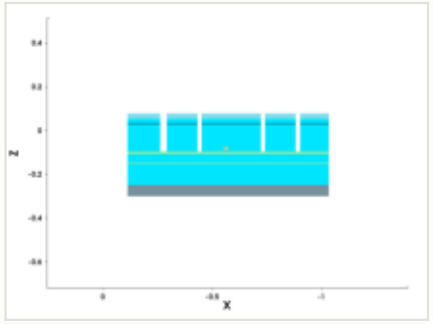

mask for this step

no mask for this step

steps by process area

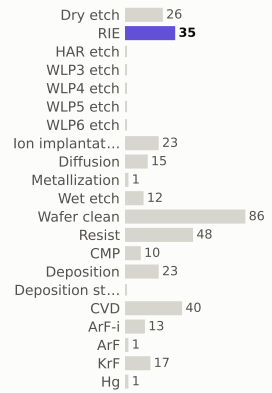

materials deposited (g)

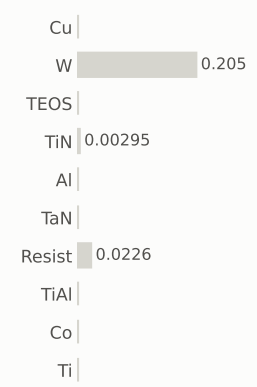

gases emitted (g)

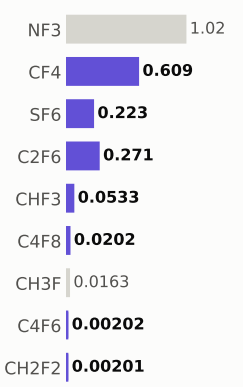

Step #4770: Wafer_clean

clean · Wafer_clean

0.169	215.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

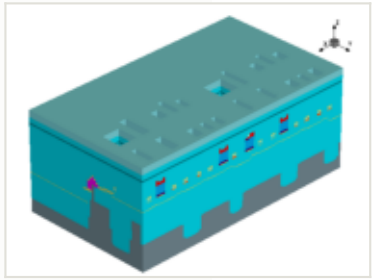

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

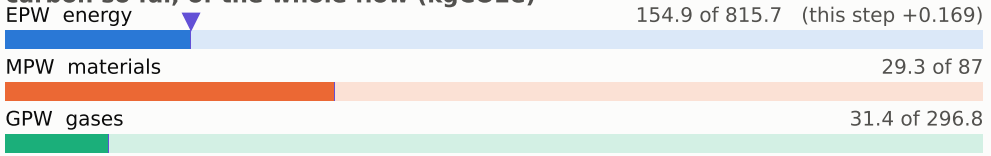

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

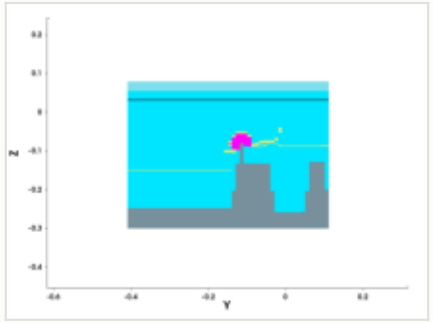

y cut at -0.150 µm

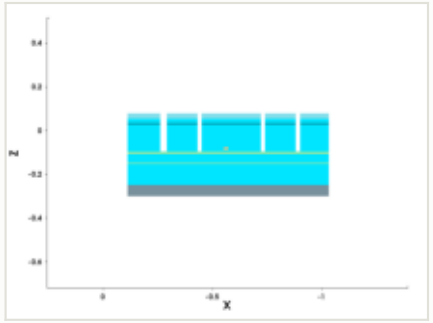

mask for this step

no mask for this step

steps by process area

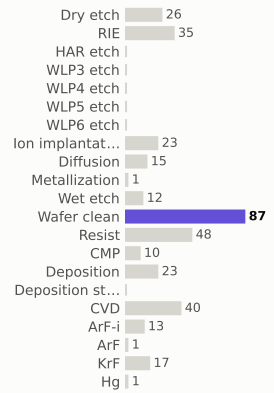

materials deposited (g)

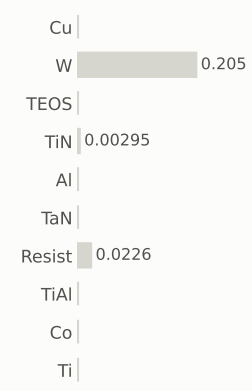

gases emitted (g)

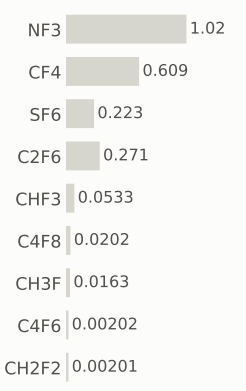

Step #4780: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	216.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

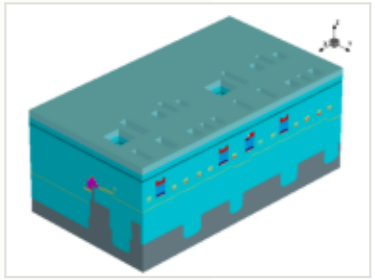

this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

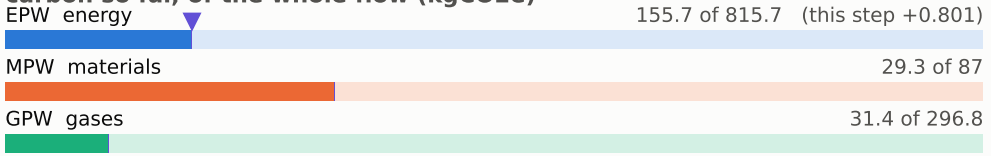

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

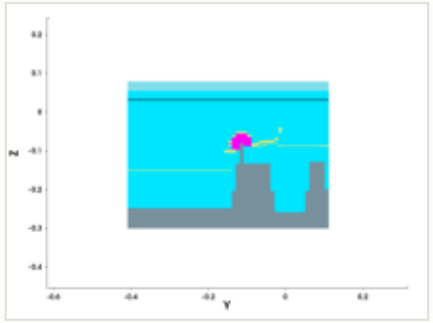

y cut at -0.150 µm

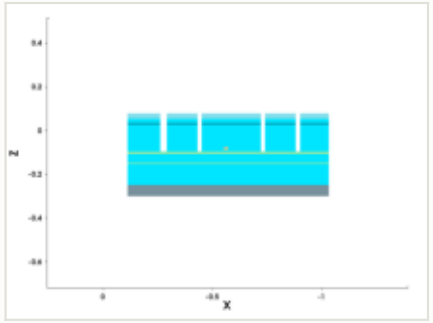

mask for this step

no mask for this step

steps by process area

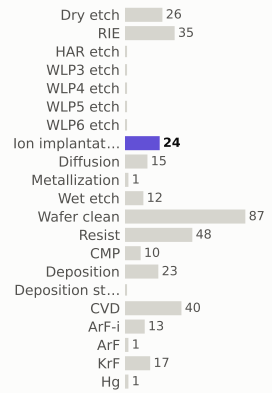

materials deposited (g)

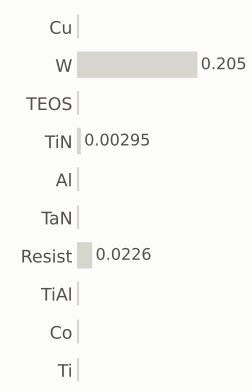

gases emitted (g)

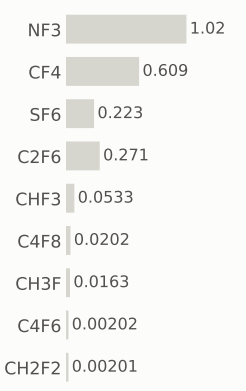

Step #4790: Wafer_clean

clean · Wafer_clean

0.169	216.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

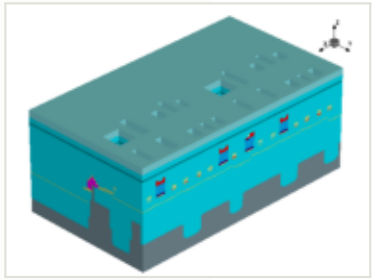

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

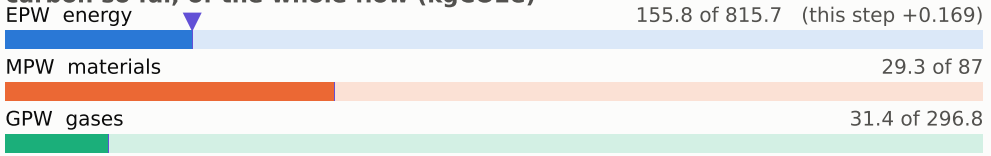

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

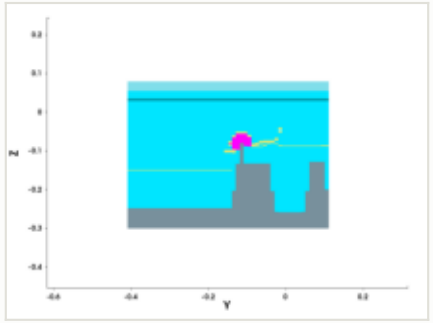

y cut at -0.150 µm

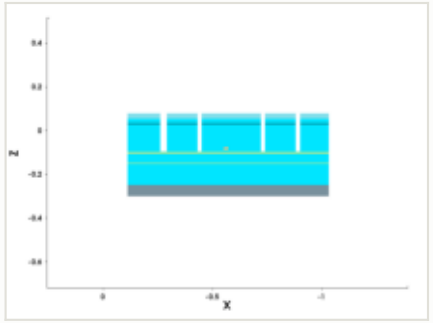

mask for this step

no mask for this step

steps by process area

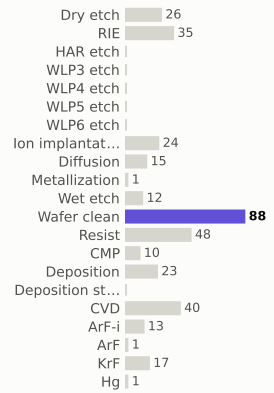

materials deposited (g)

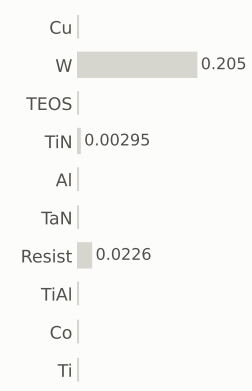

gases emitted (g)

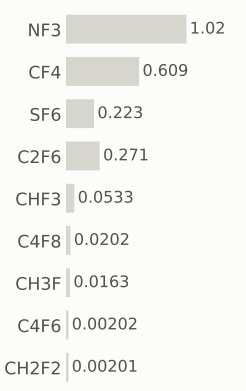

Step #4800: Resist

depo_fill · Resist

0.169	216.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

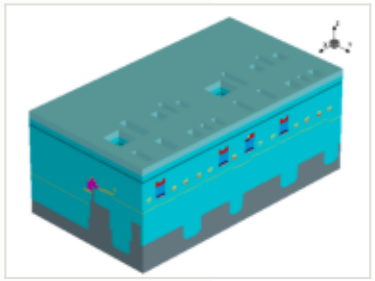

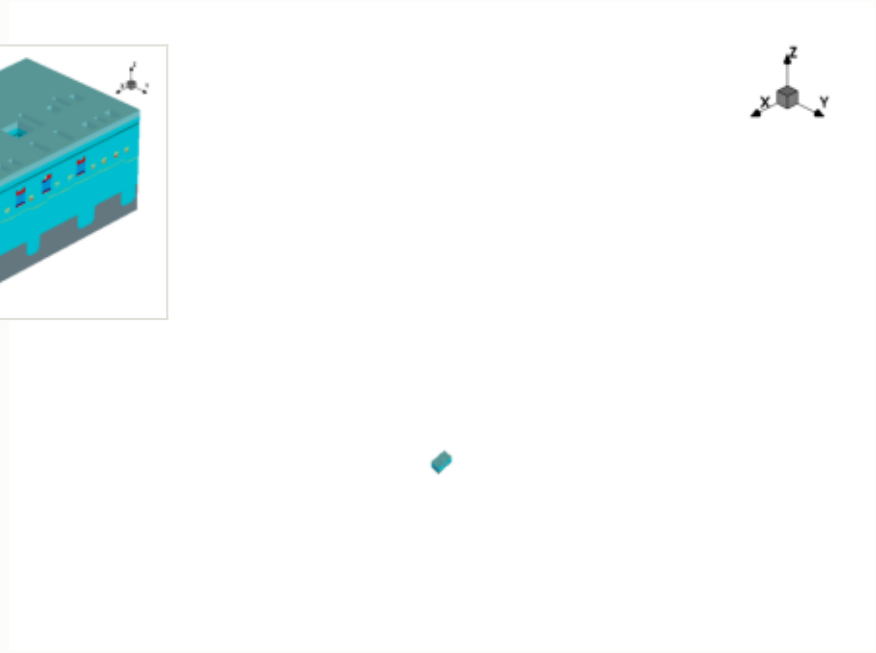

this step

process area	Resist
material	—
thickness	0.12 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

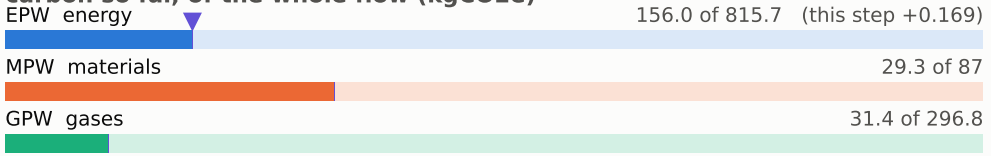

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

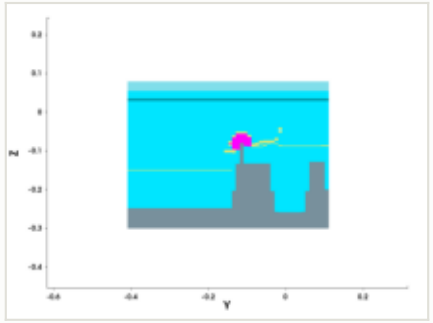

y cut at -0.150 µm

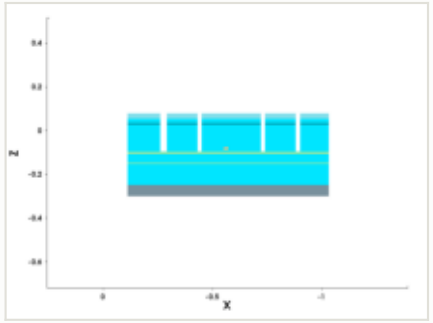

mask for this step

no mask for this step

steps by process area

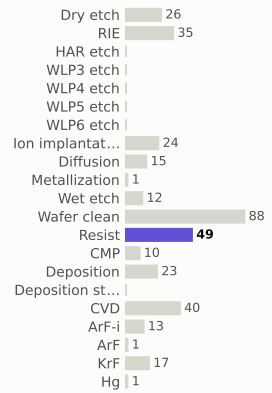

materials deposited (g)



gases emitted (g)

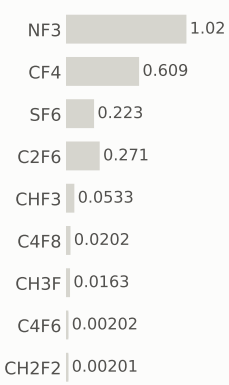

Step #4810: Spx_only

depo_fill · Spx_only

0	216.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

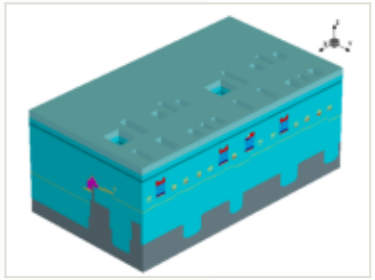

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.03 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

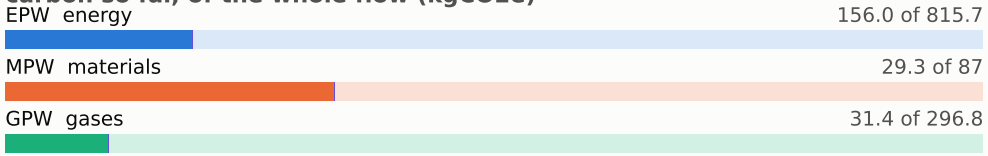

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

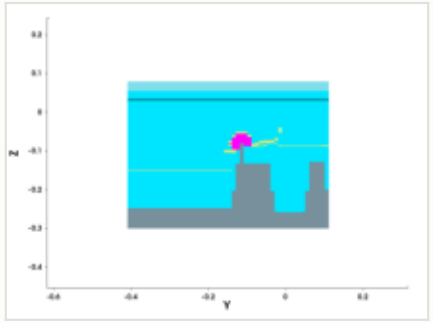

y cut at -0.150 µm

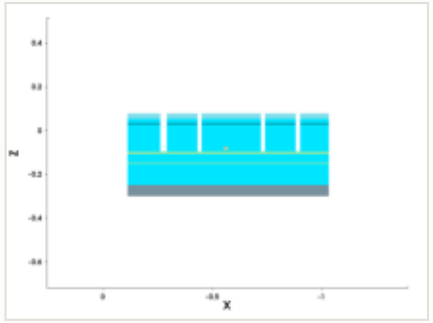

mask for this step

no mask for this step

steps by process area

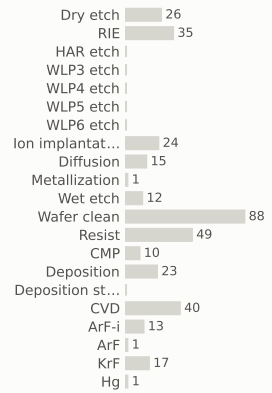

materials deposited (g)

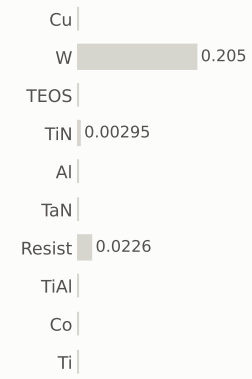

gases emitted (g)

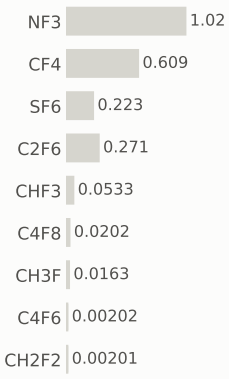

Step #4820: CVD

depo_fill · CVD

1.31	218.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

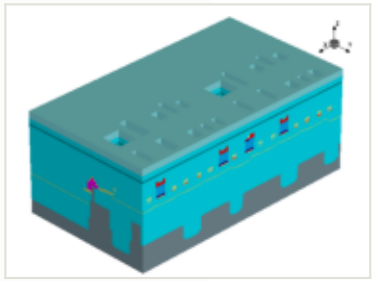

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

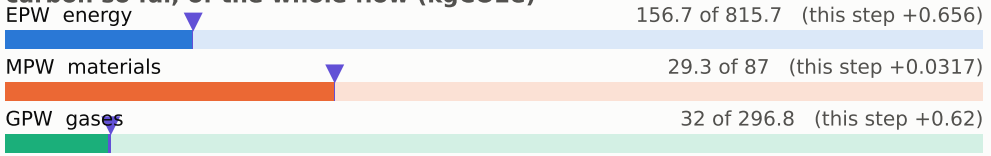

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

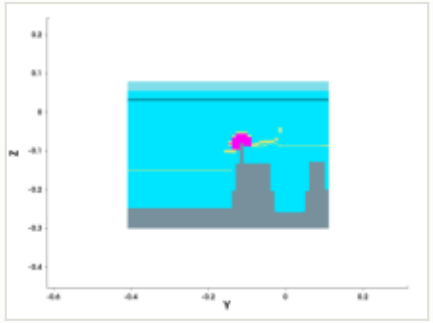

y cut at -0.150 µm

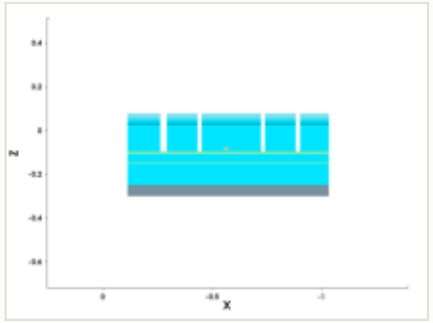

mask for this step

no mask for this step

steps by process area

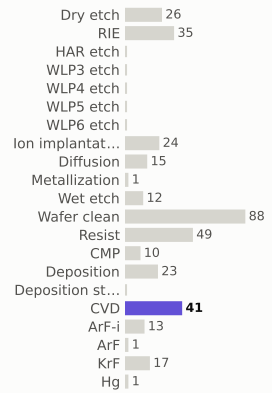

materials deposited (g)

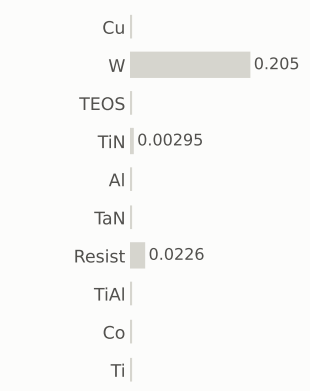

gases emitted (g)

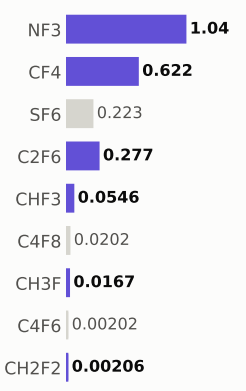

Step #4830: Wafer_clean

clean · Wafer_clean

0.169	218.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

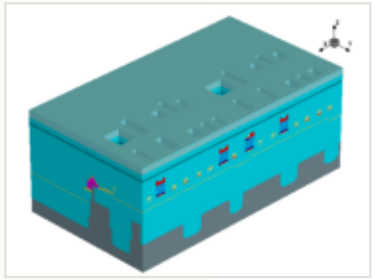

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

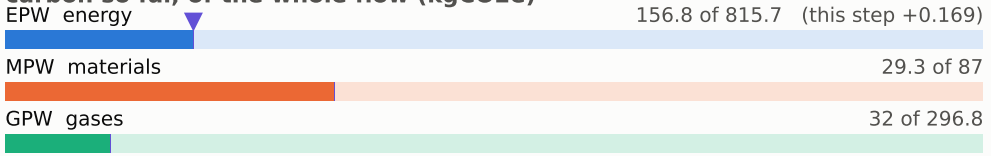

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

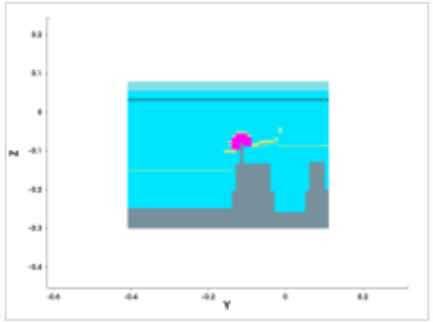

y cut at -0.150 µm

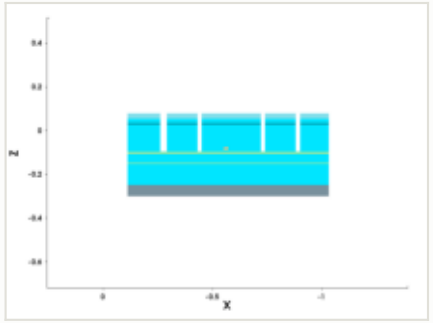

mask for this step

no mask for this step

steps by process area

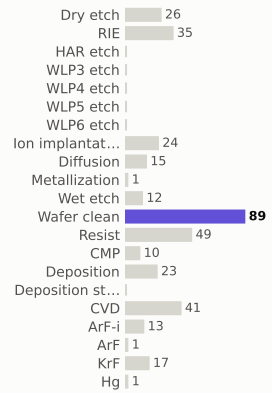

materials deposited (g)

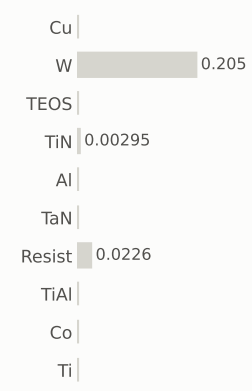

gases emitted (g)

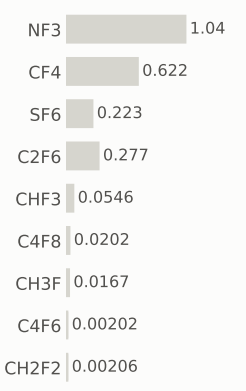

Step #4840: Resist

resist · Resist

0.169	218.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

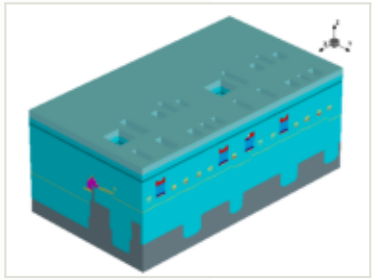

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

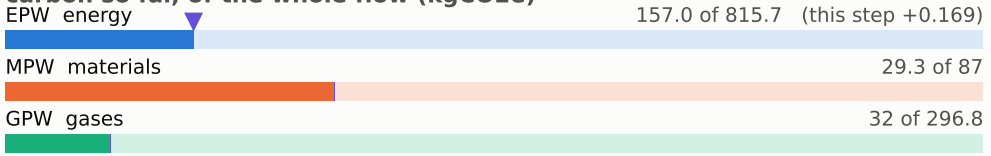

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

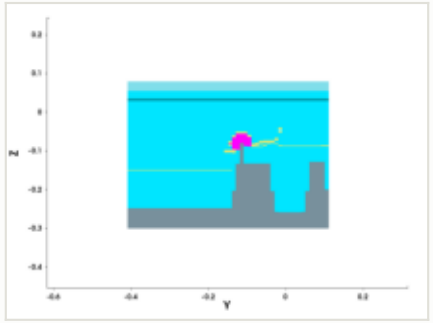

y cut at -0.150 µm

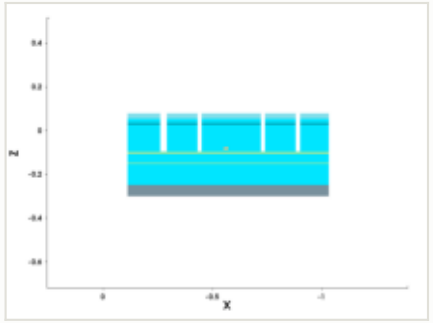

mask for this step

no mask for this step

steps by process area

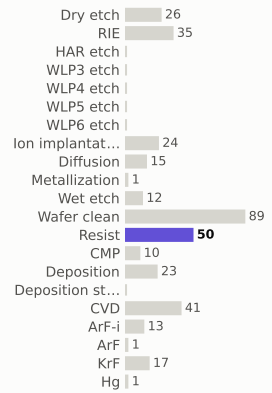

materials deposited (g)

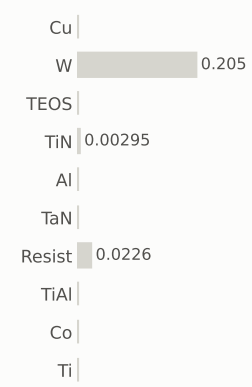

gases emitted (g)



Step #4850: ArF-i

litho_patterning · ArF-i

0.217	218.5	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

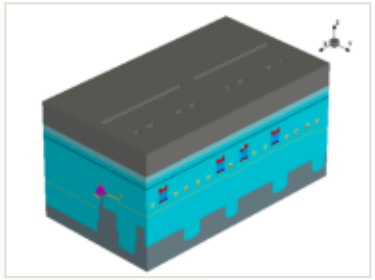

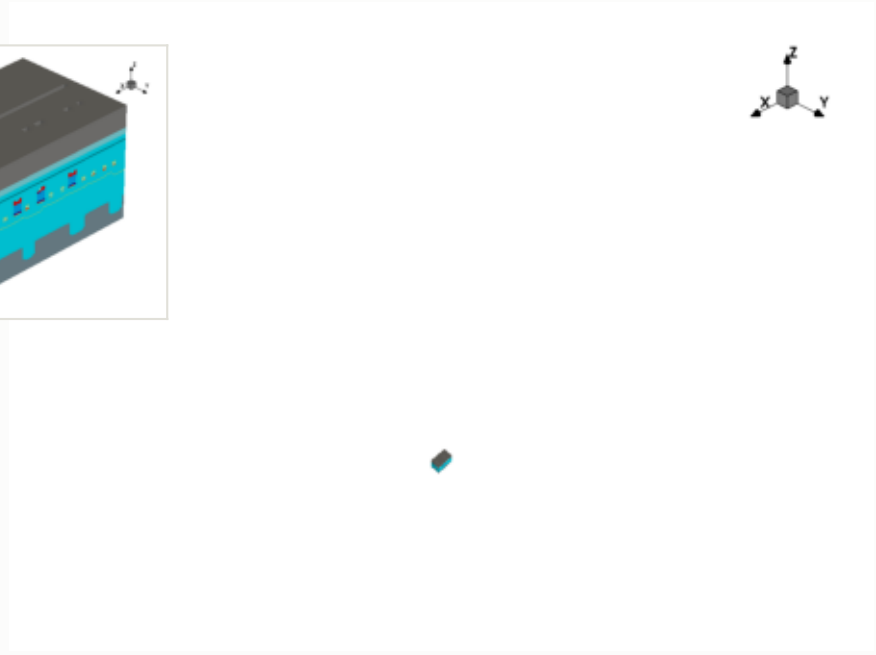

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

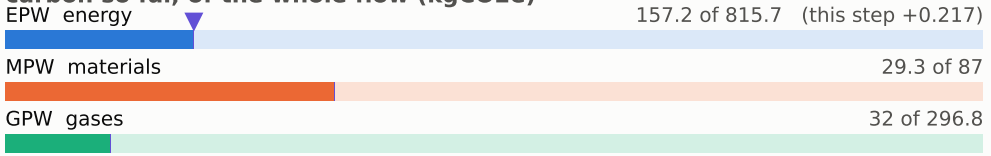

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

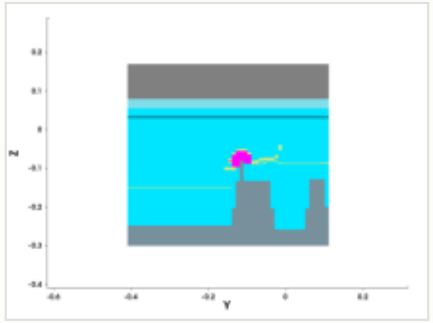

y cut at -0.150 µm

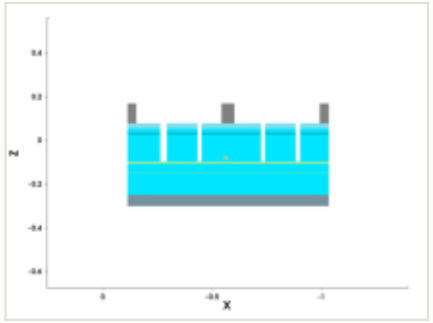

mask: layer 2016:0 (GDSII)



steps by process area

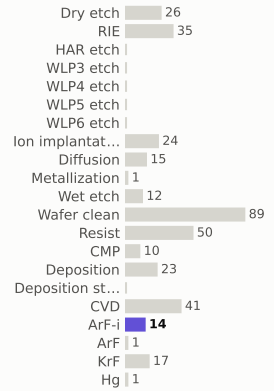

materials deposited (g)



gases emitted (g)

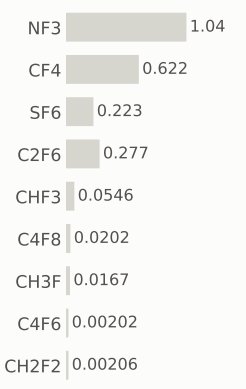

Step #4860: Spx_only

etch_anisotropic · Spx_only

0	218.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

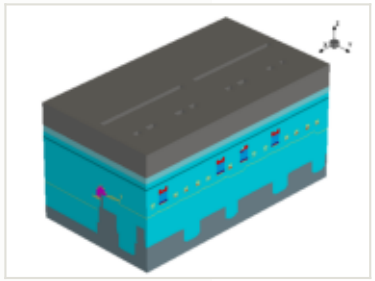

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

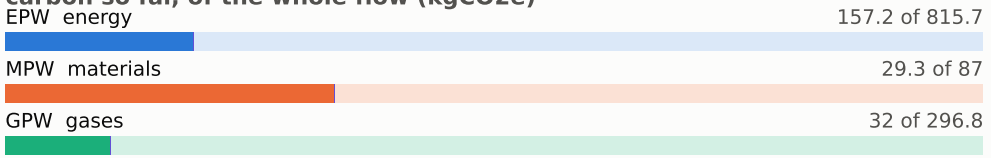

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

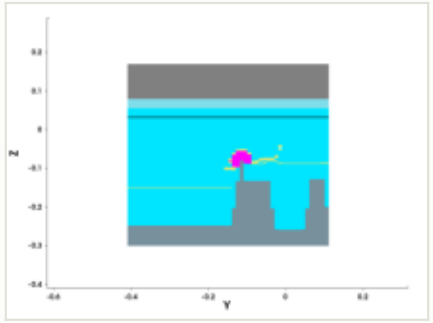

y cut at -0.150 µm

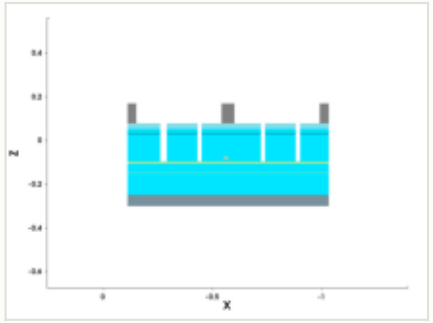

mask for this step

no mask for this step

steps by process area

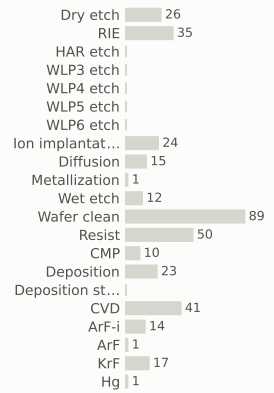

materials deposited (g)

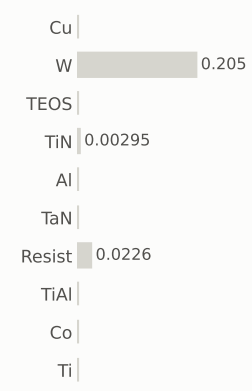

gases emitted (g)

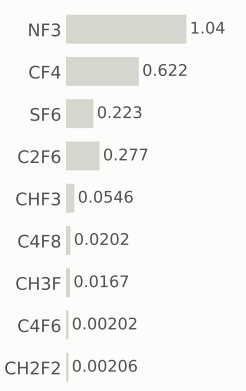

Step #4870: Spx_only

etch_anisotropic · Spx_only

0	218.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

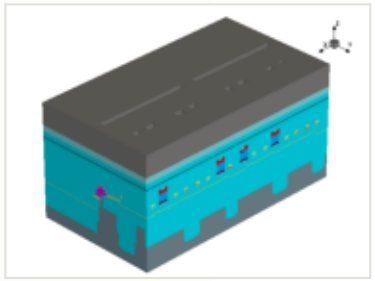

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

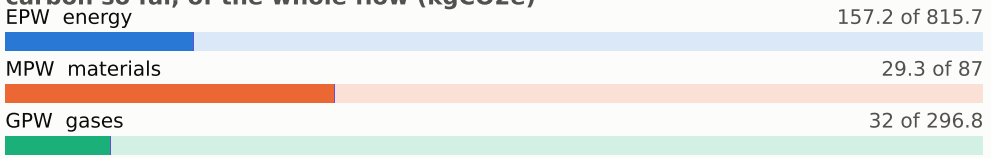

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

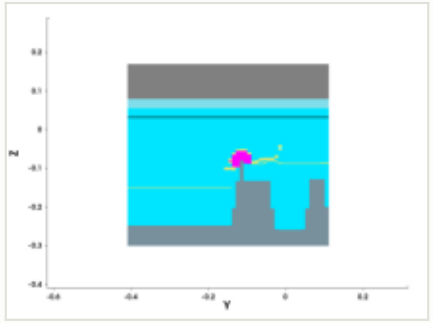

y cut at -0.150 µm

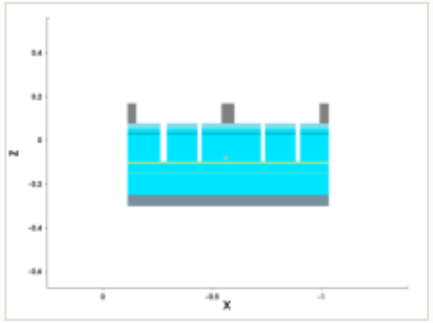

mask for this step

no mask for this step

steps by process area

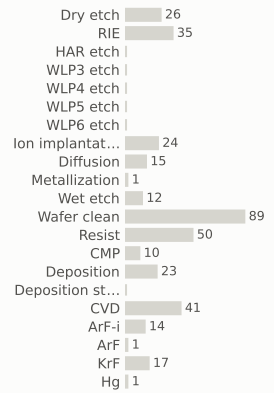

materials deposited (g)

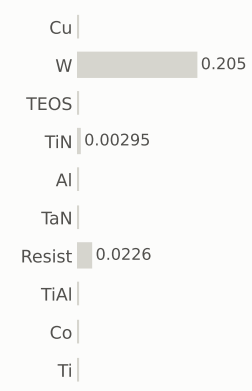

gases emitted (g)

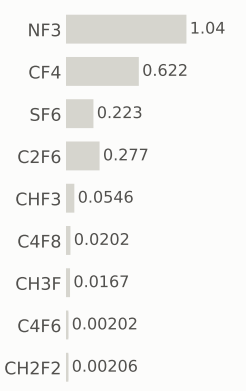

Step #4880: Spx_only

etch_anisotropic · Spx_only

0	218.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

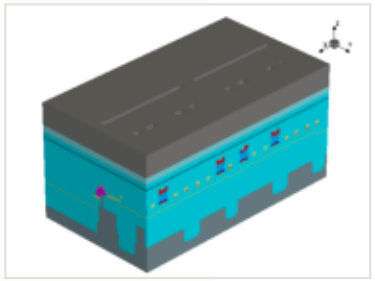

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

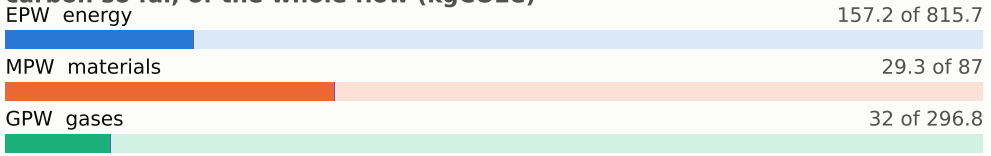

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

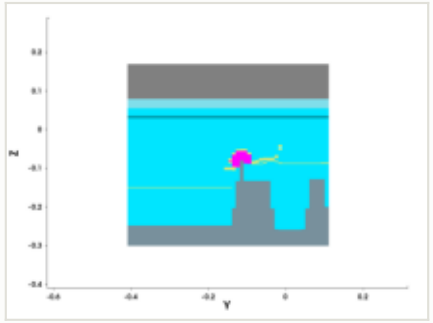

y cut at -0.150 µm

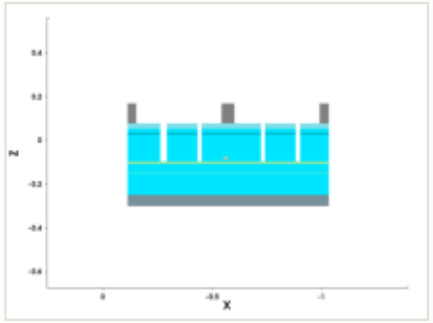

mask for this step

no mask for this step

steps by process area

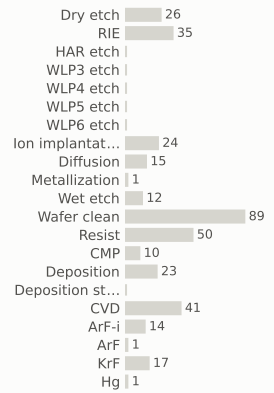

materials deposited (g)

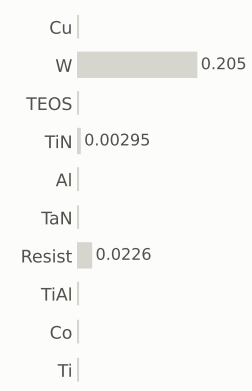

gases emitted (g)

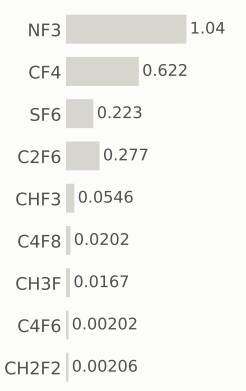

Step #4890: Spx_only

etch_anisotropic · Spx_only

0	218.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

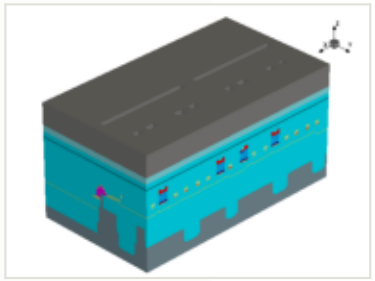

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

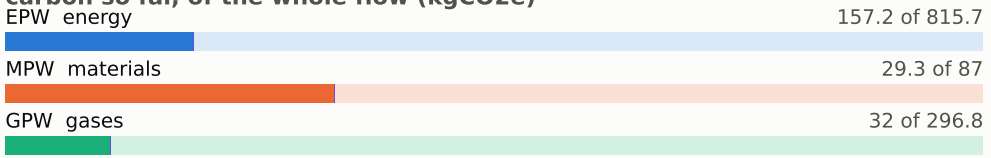

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

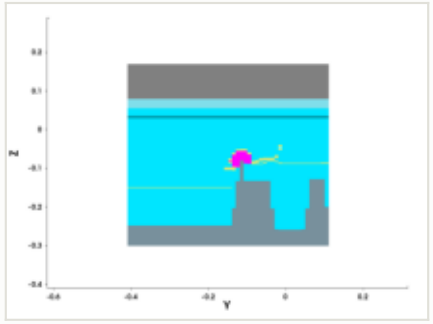

y cut at -0.150 µm

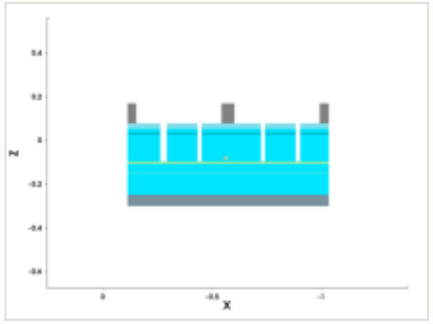

mask for this step

no mask for this step

steps by process area

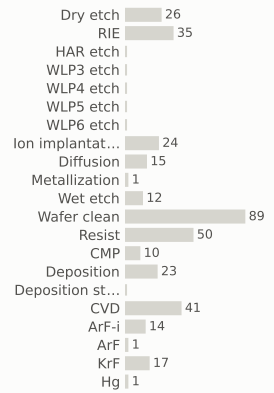

materials deposited (g)

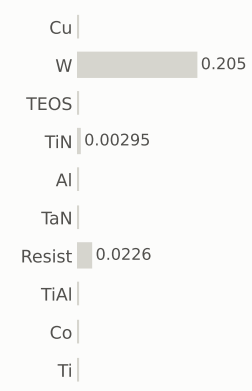

gases emitted (g)

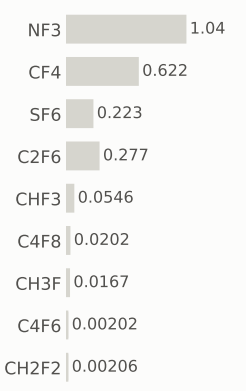

Step #4900: Spx_only

etch_anisotropic · Spx_only

0	218.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

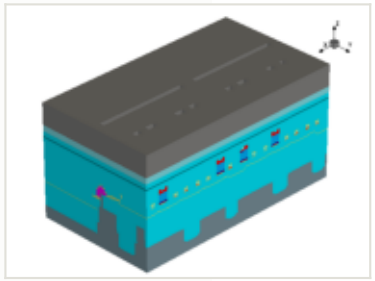

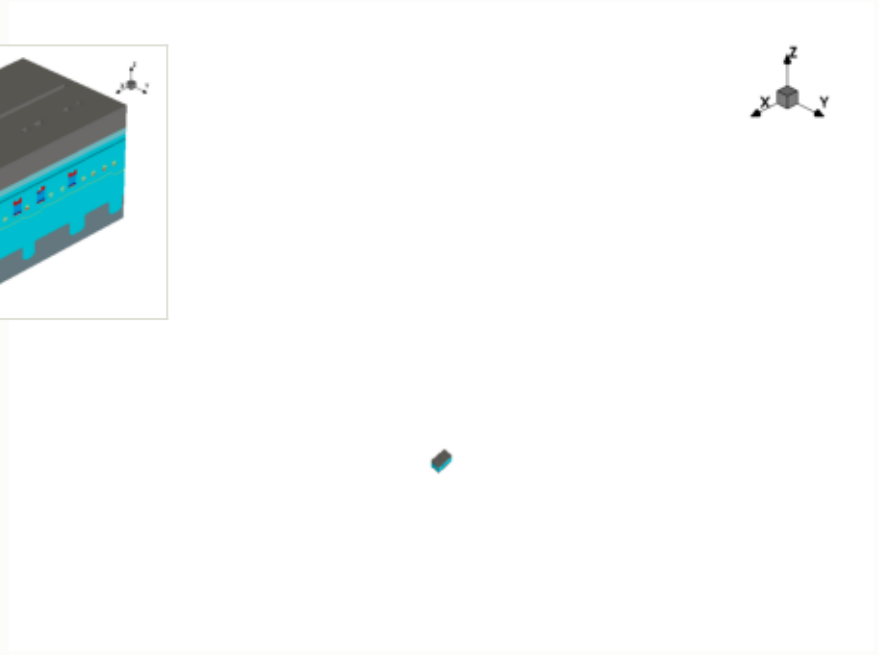

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

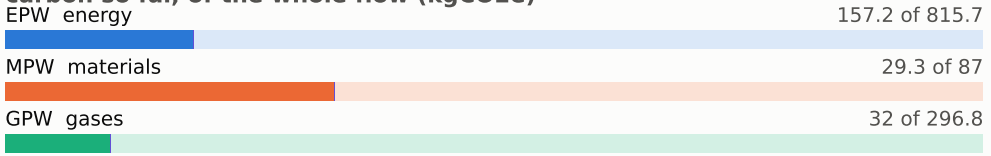

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

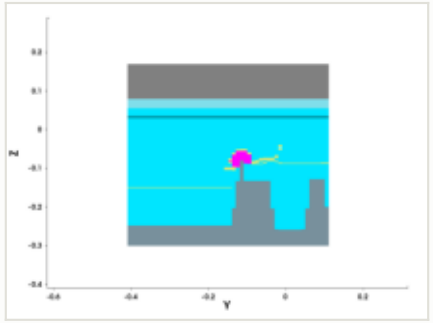

y cut at -0.150 µm

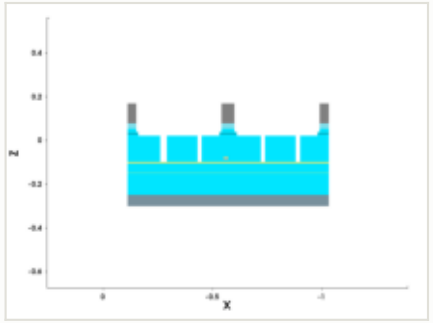

mask for this step

no mask for this step

steps by process area

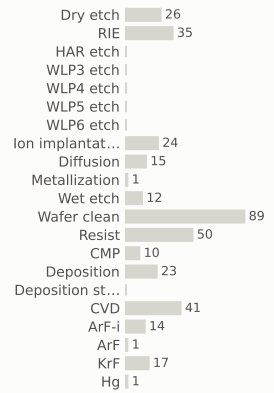

materials deposited (g)

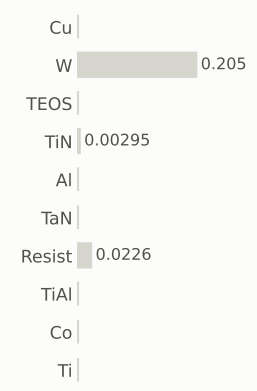

gases emitted (g)

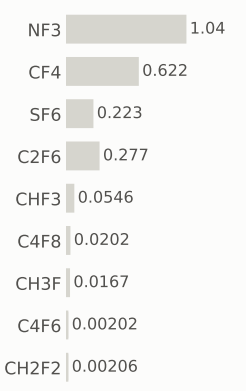

Step #4910: RIE

etch_anisotropic · RIE

1.04	219.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

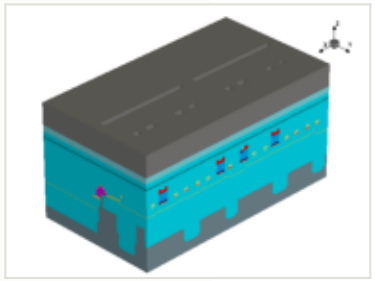

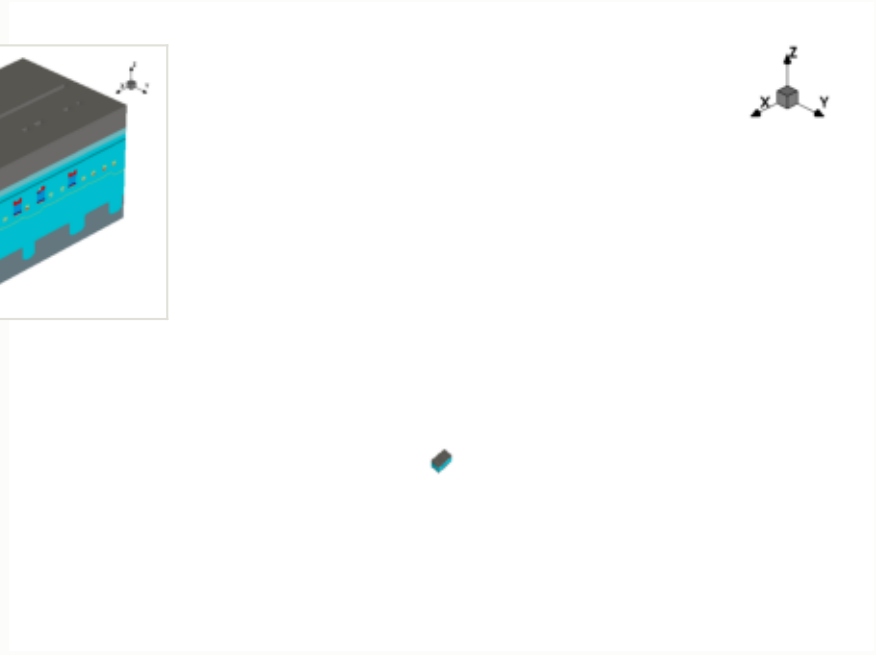

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

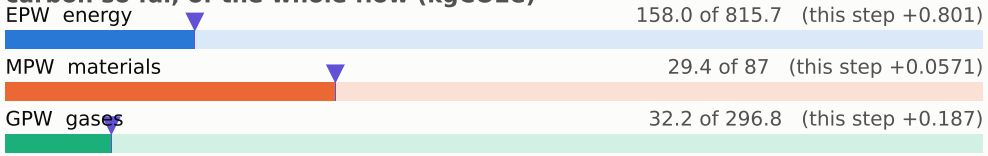

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

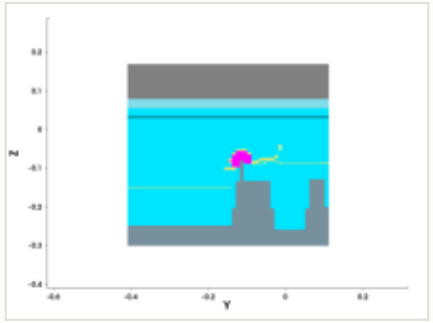

y cut at -0.150 µm

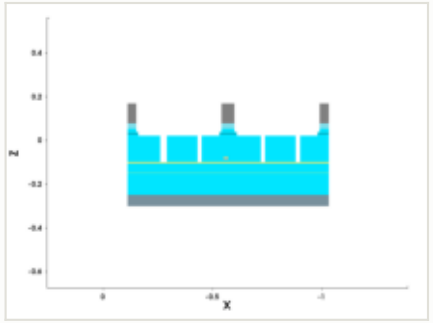

mask for this step

no mask for this step

steps by process area

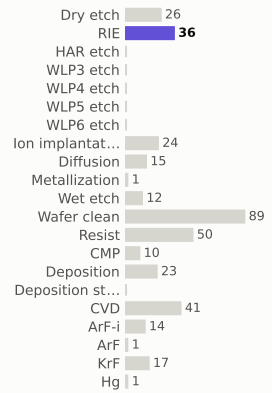

materials deposited (g)

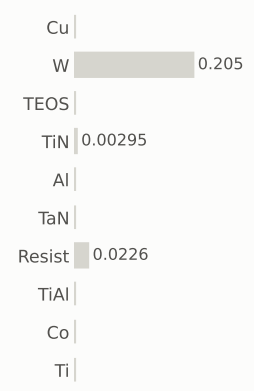

gases emitted (g)

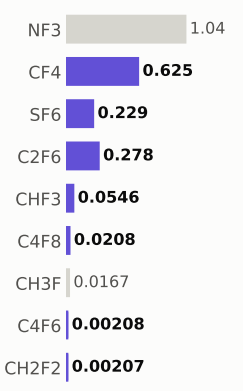

Step #4920: Spx_only

etch_strip · Spx_only

0	219.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

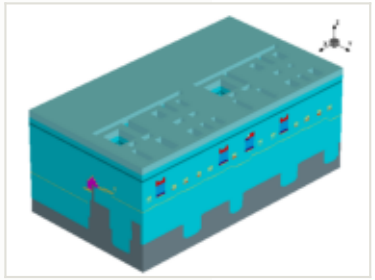

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

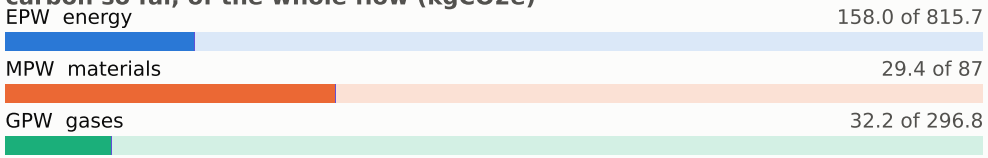

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

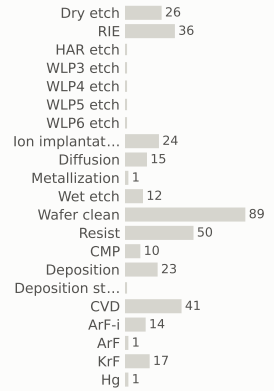

materials deposited (g)



gases emitted (g)

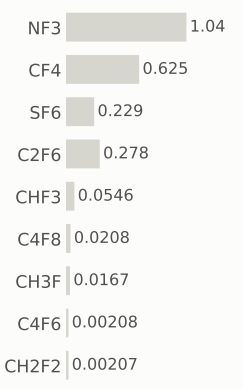

x cut at -0.570 µm

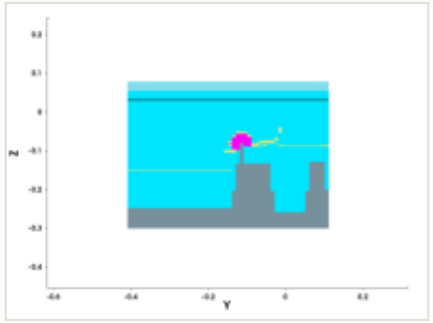

y cut at -0.150 µm

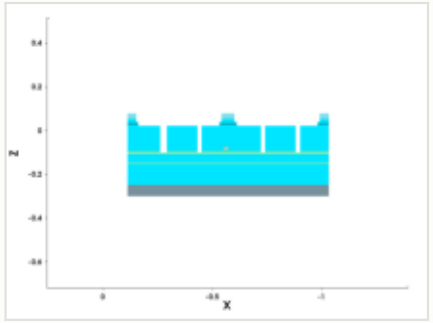

mask for this step

no mask for this step

Step #4930: Wafer_clean

clean · Wafer_clean

0.169	219.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

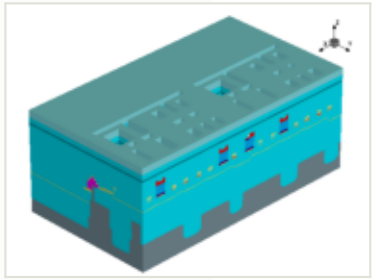

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

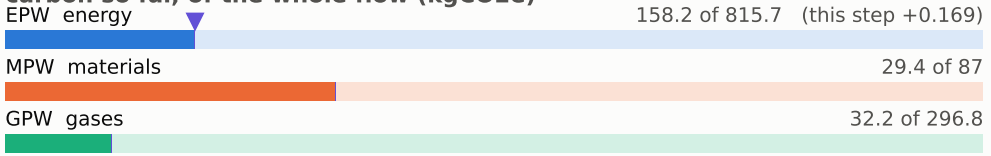

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

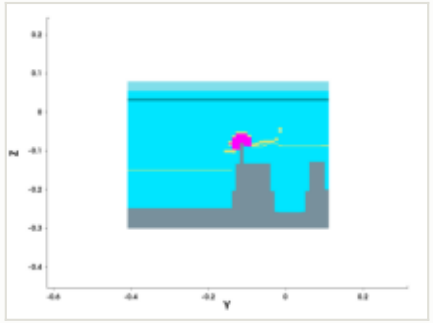

y cut at -0.150 µm

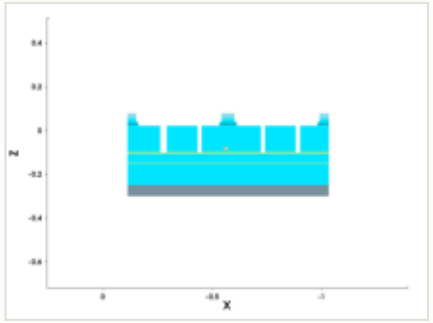

mask for this step

no mask for this step

steps by process area

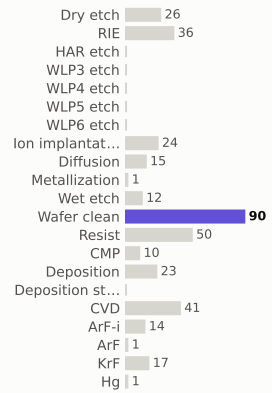

materials deposited (g)

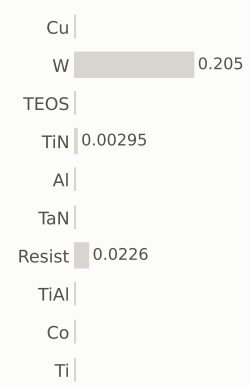

gases emitted (g)



Step #4940: Resist

depo_fill · Resist

0.169	219.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

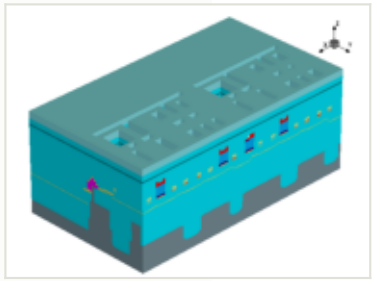

this step

process area	Resist
material	—
thickness	0.12 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

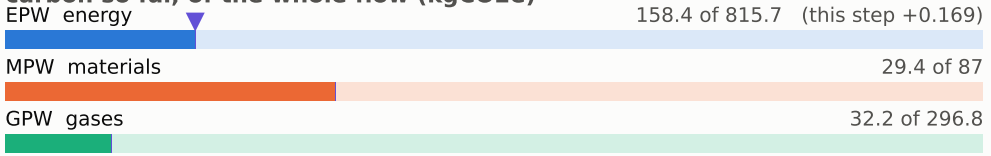

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

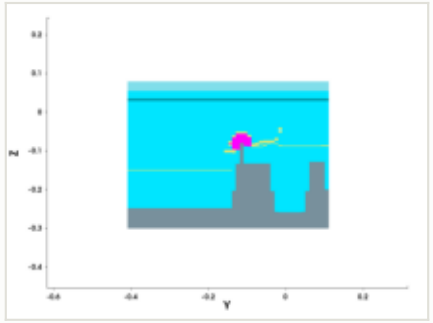

y cut at -0.150 µm

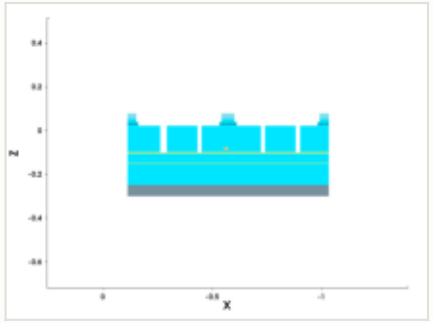

mask for this step

no mask for this step

steps by process area

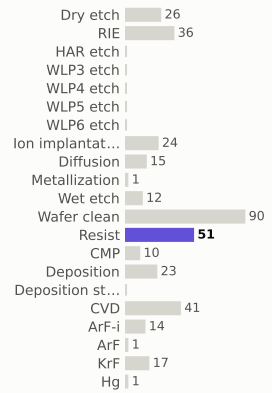

materials deposited (g)

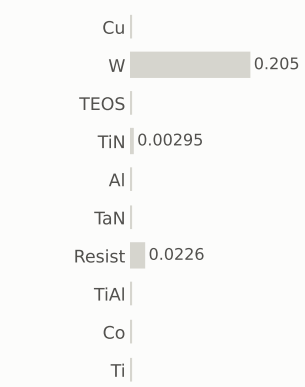

gases emitted (g)

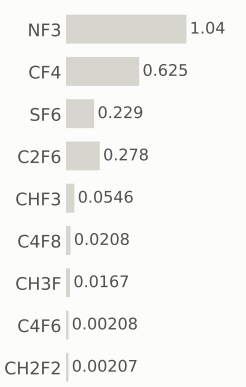

Step #4950: Spx_only

depo_fill · Spx_only

0	219.9	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

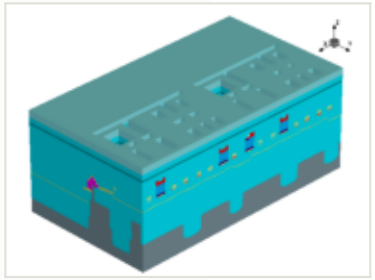

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.03 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

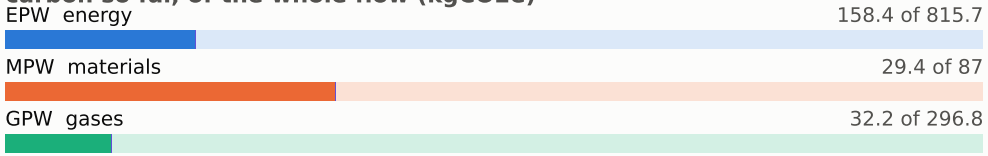

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

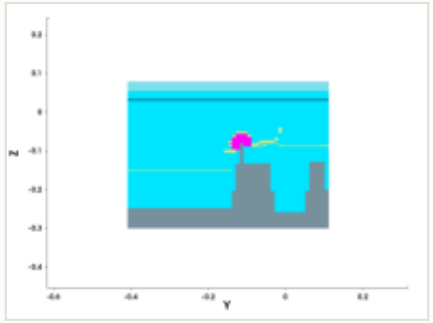

y cut at -0.150 µm

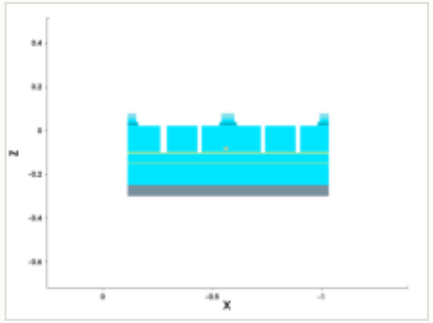

mask for this step

no mask for this step

steps by process area

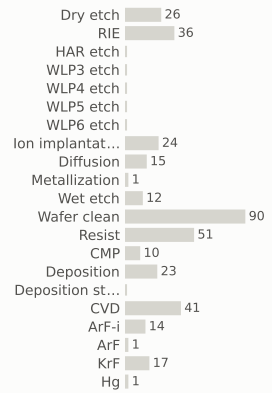

materials deposited (g)

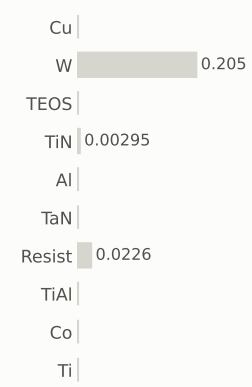

gases emitted (g)

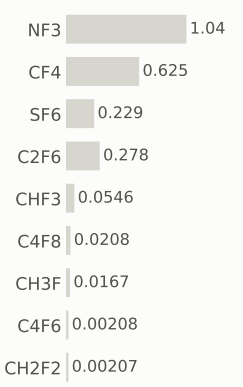

Step #4960: CVD

depo_fill · CVD

1.31	221.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

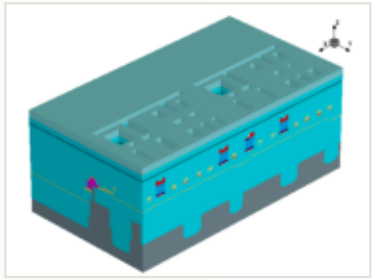

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

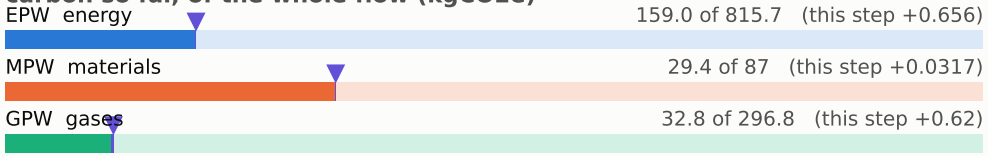

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

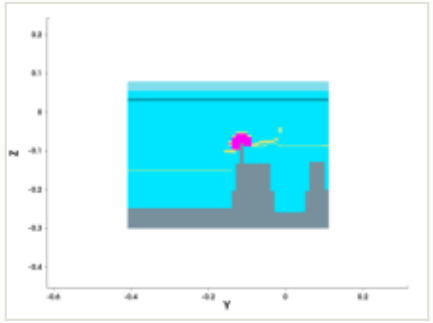

y cut at -0.150 µm

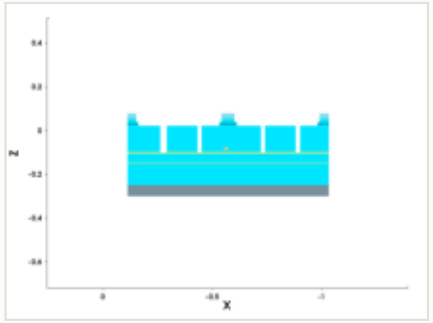

mask for this step

no mask for this step

steps by process area

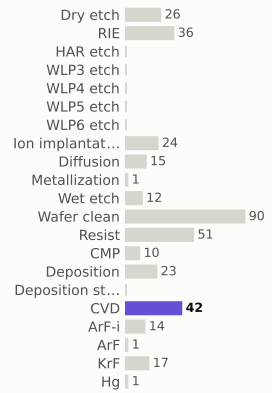

materials deposited (g)

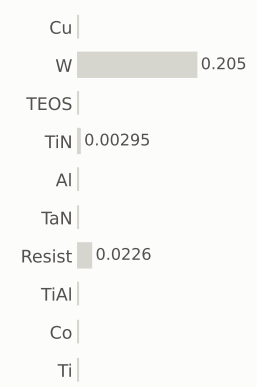

gases emitted (g)

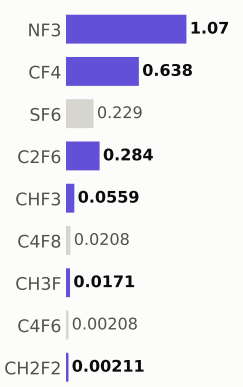

Step #4970: Wafer_clean

clean · Wafer_clean

0.169	221.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

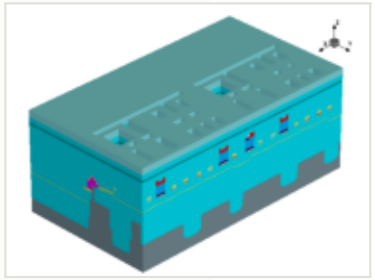

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

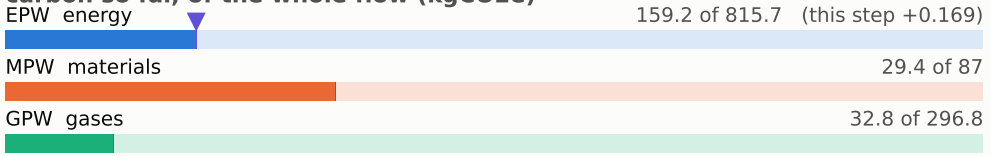

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

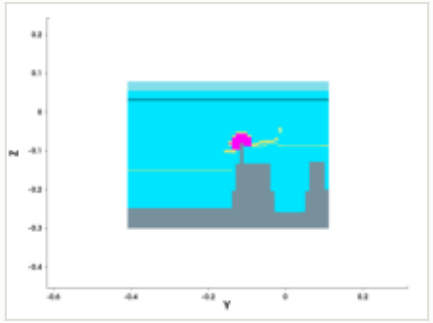

y cut at -0.150 µm

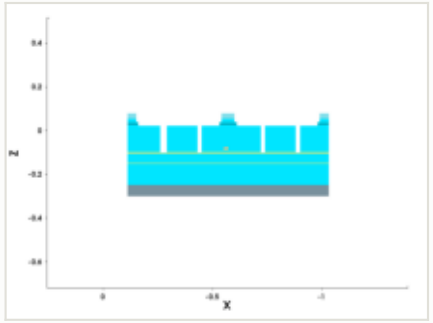

mask for this step

no mask for this step

steps by process area

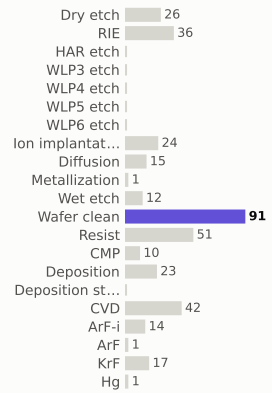

materials deposited (g)

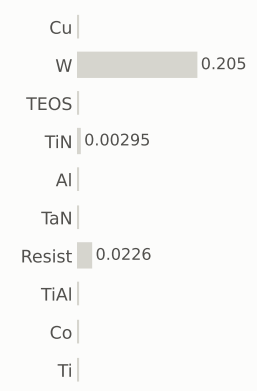

gases emitted (g)

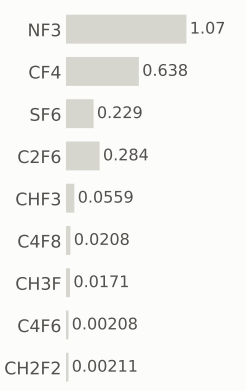

Step #4980: Resist

resist · Resist

0.169	221.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

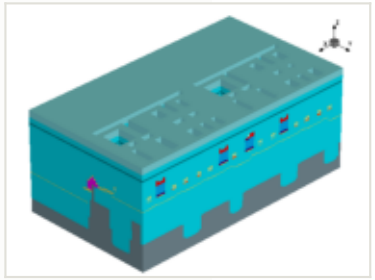

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

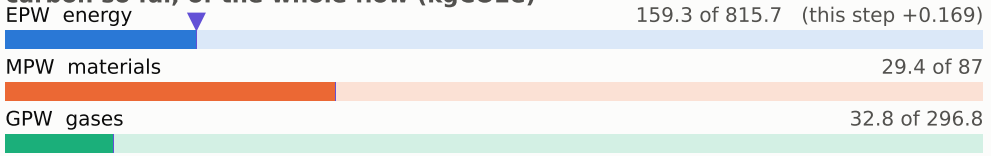

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

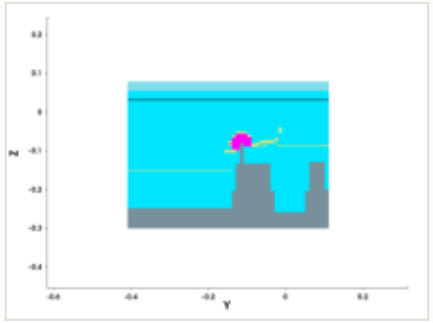

y cut at -0.150 µm

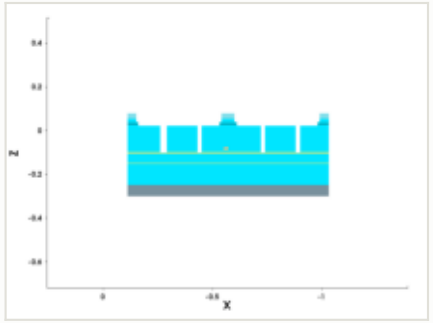

mask for this step

no mask for this step

steps by process area

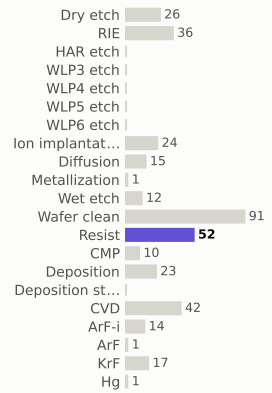

materials deposited (g)

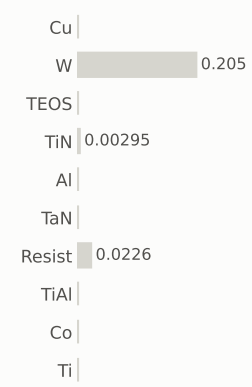

gases emitted (g)

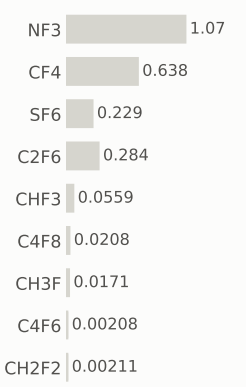

Step #4990: ArF-i

litho_patterning · ArF-i

0.217	221.8	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

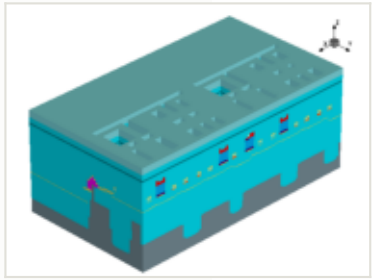

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

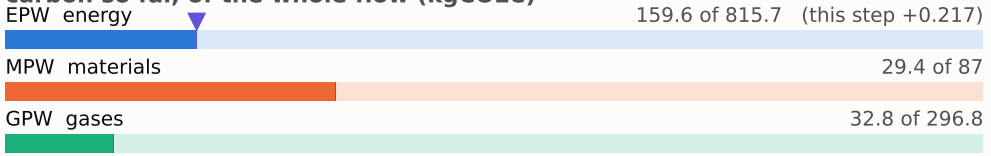

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

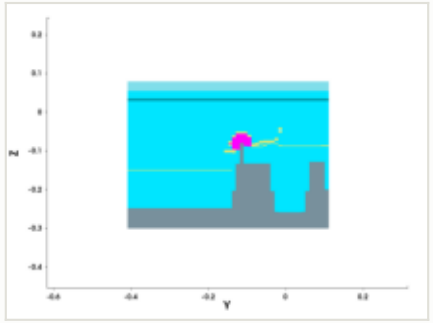

y cut at -0.150 µm

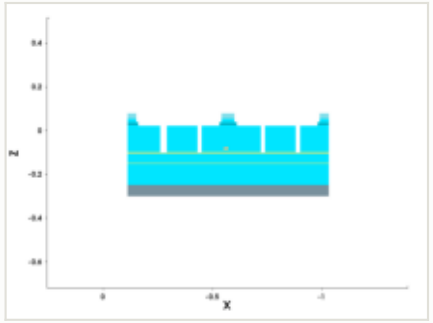

mask: layer 2016:0 (GDSII)



steps by process area

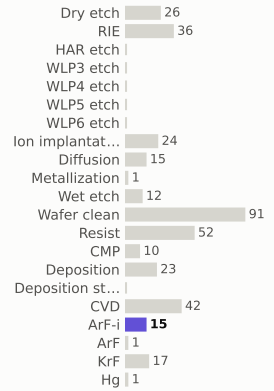

materials deposited (g)

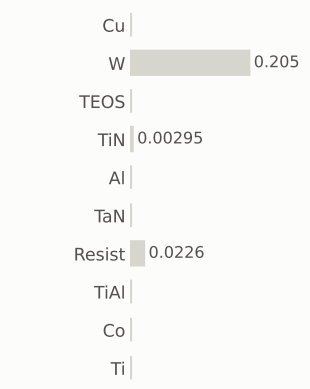

gases emitted (g)

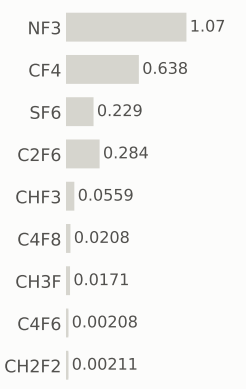

Step #5000: Spx_only

etch_anisotropic · Spx_only

0	221.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

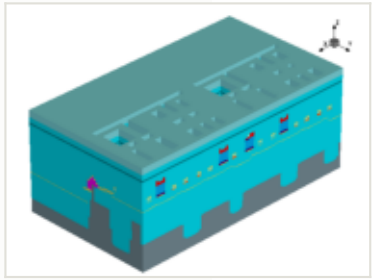

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

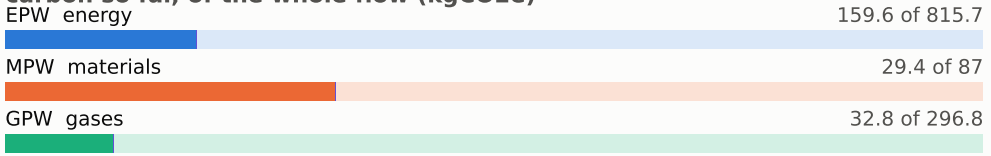

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

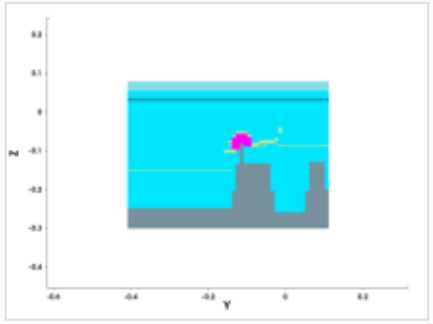

y cut at -0.150 µm

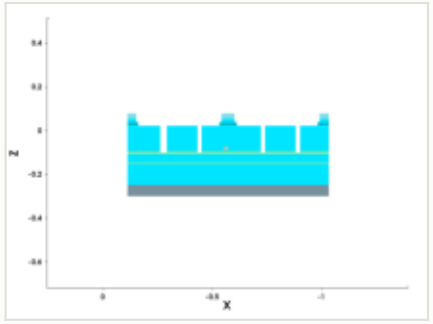

mask for this step

no mask for this step

steps by process area

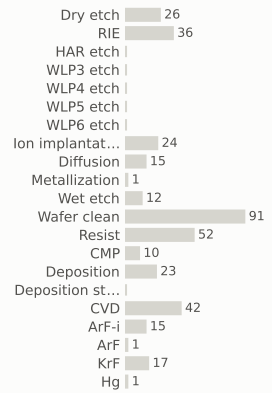

materials deposited (g)

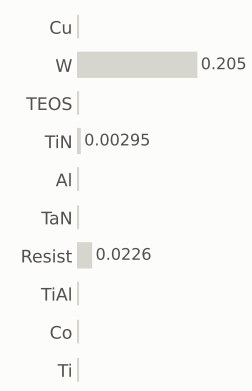

gases emitted (g)

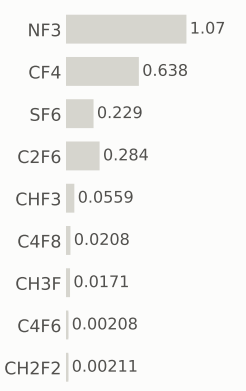

Step #5010: Spx_only

etch_anisotropic · Spx_only

0	221.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

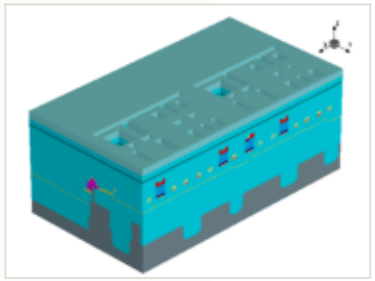

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

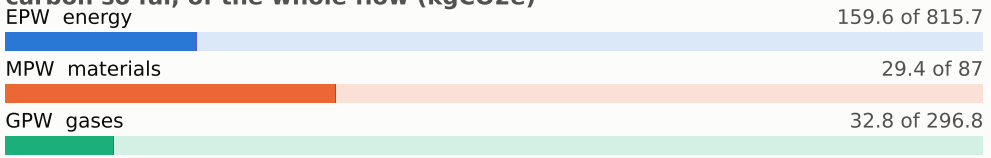

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

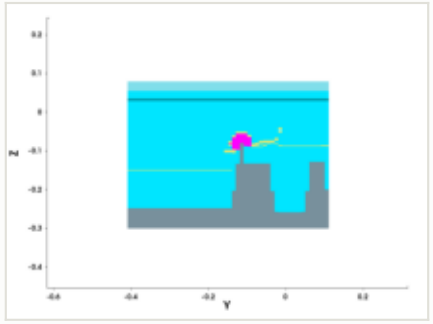

y cut at -0.150 µm

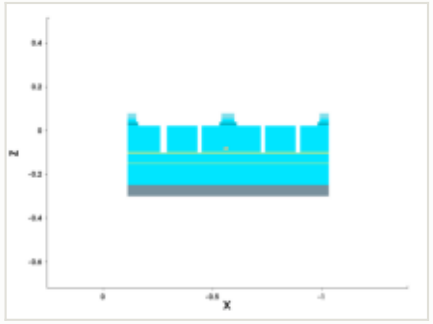

mask for this step

no mask for this step

steps by process area

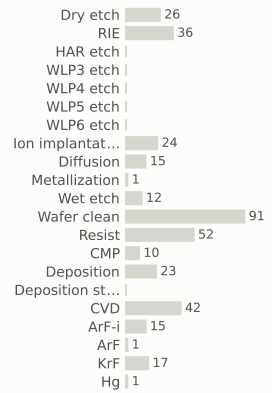

materials deposited (g)

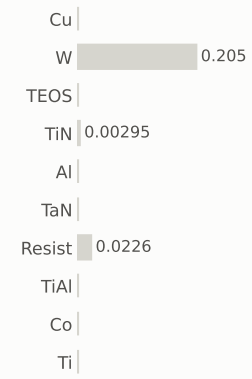

gases emitted (g)

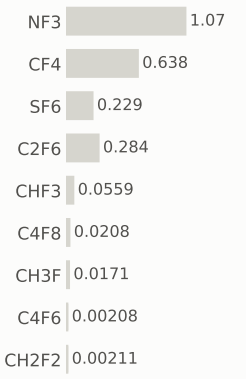

Step #5020: Spx_only

etch_anisotropic · Spx_only

0	221.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

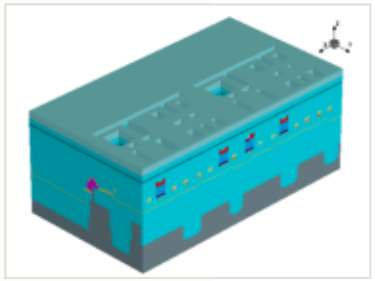

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

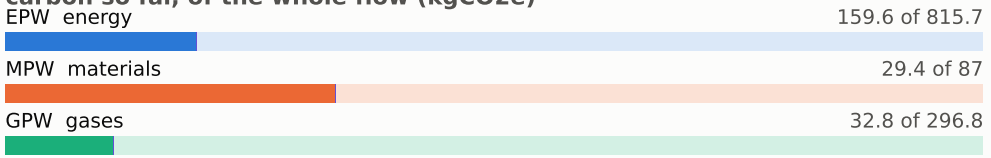

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

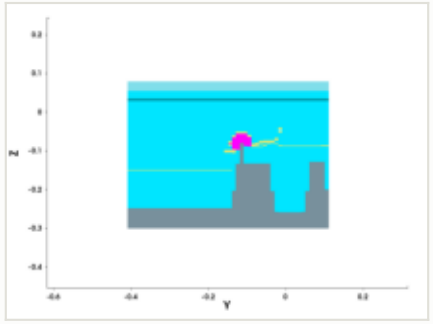

y cut at -0.150 µm

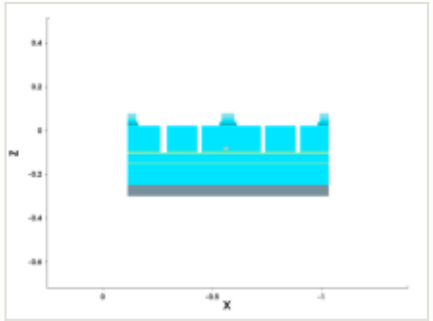

mask for this step

no mask for this step

steps by process area

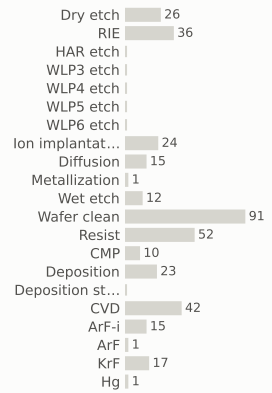

materials deposited (g)



gases emitted (g)

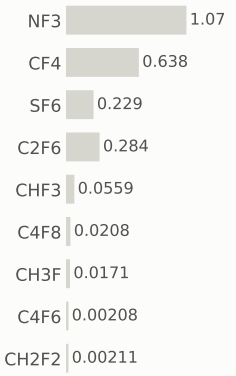

Step #5030: Spx_only

etch_anisotropic · Spx_only

0	221.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

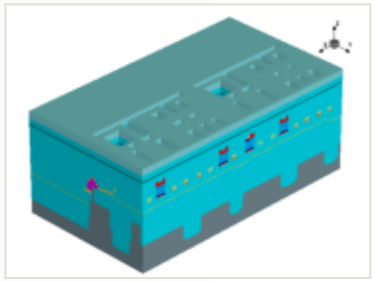

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

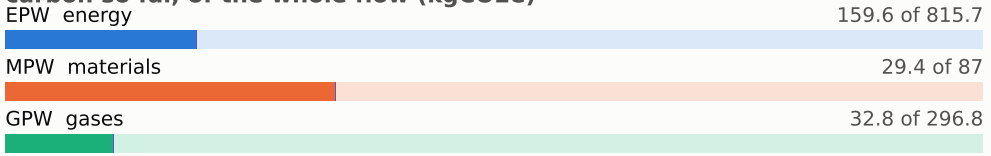

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

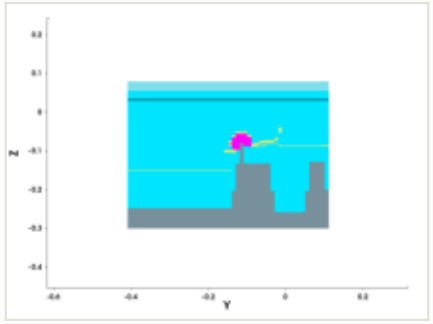

y cut at -0.150 µm

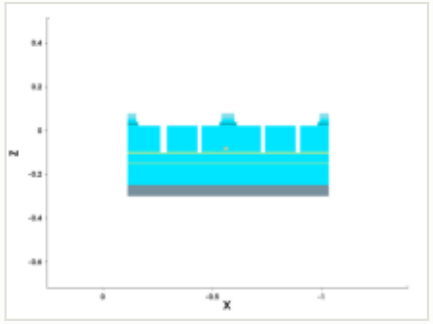

mask for this step

no mask for this step

steps by process area

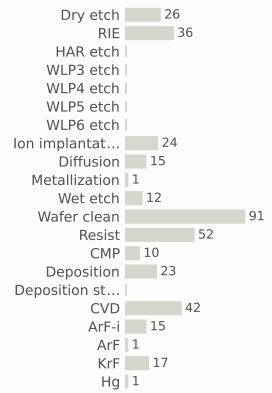

materials deposited (g)

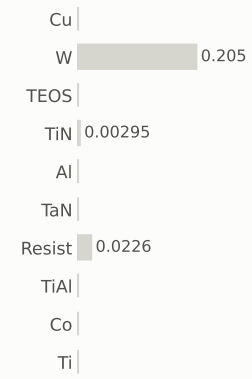

gases emitted (g)

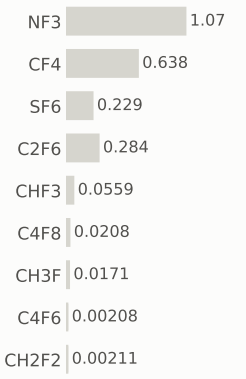

Step #5040: Spx_only

etch_anisotropic · Spx_only

0	221.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

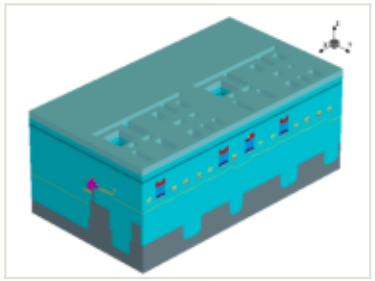

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

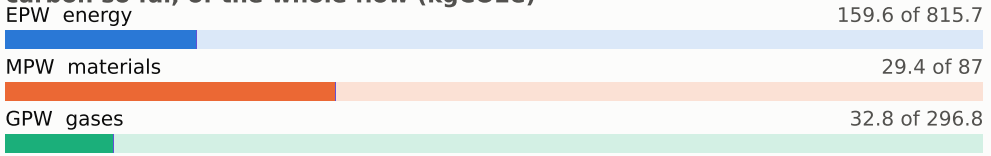

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

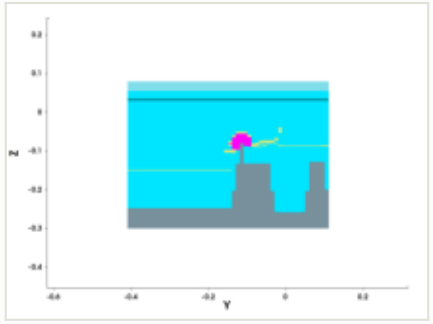

y cut at -0.150 µm

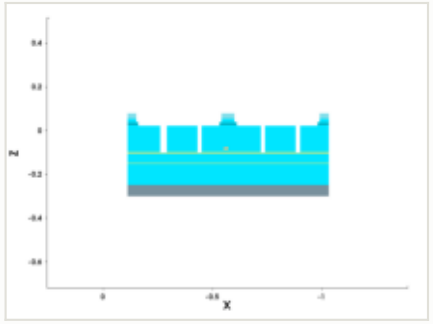

mask for this step

no mask for this step

steps by process area

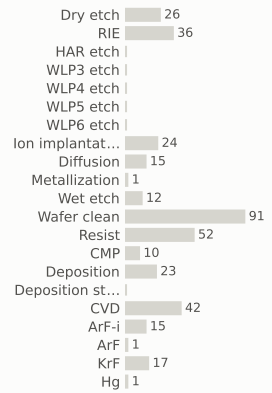

materials deposited (g)

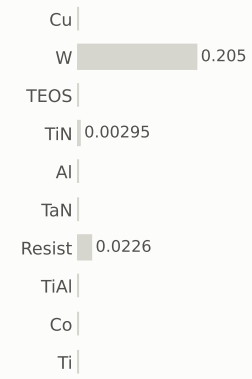

gases emitted (g)

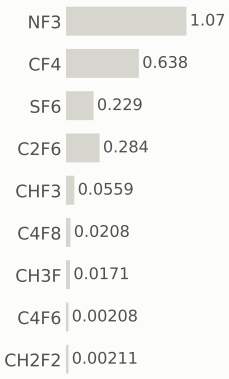

Step #5050: Spx_only

etch_ellipsoidal · Spx_only

0	221.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

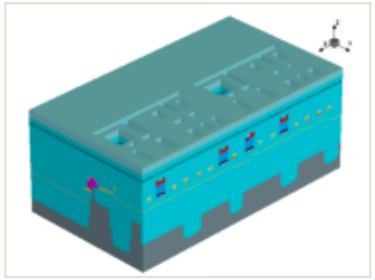

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

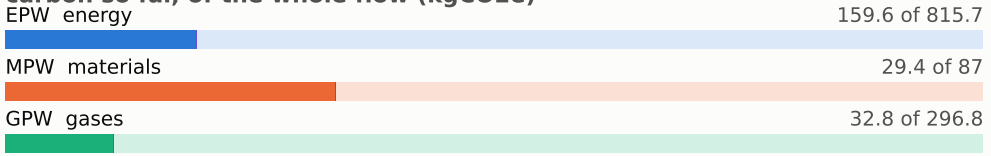

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

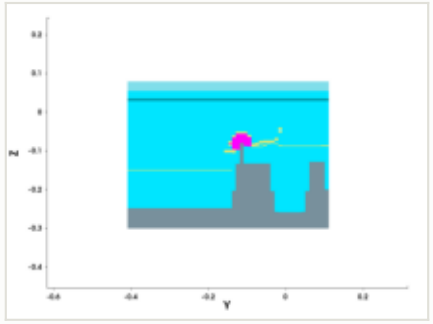

y cut at -0.150 µm

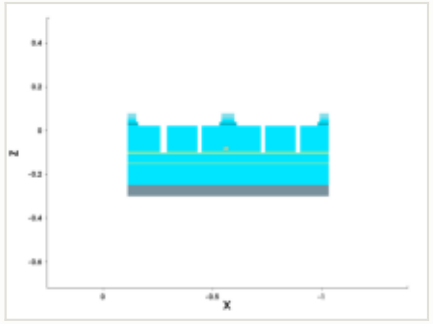

mask for this step

no mask for this step

steps by process area

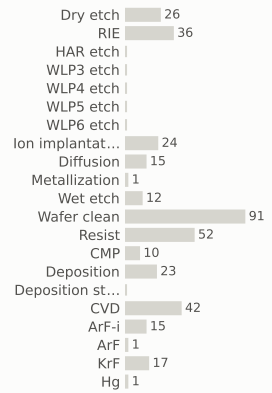

materials deposited (g)

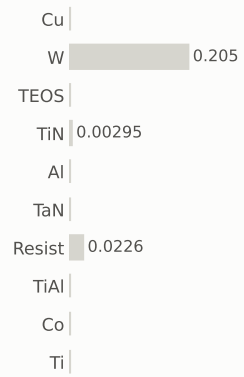

gases emitted (g)

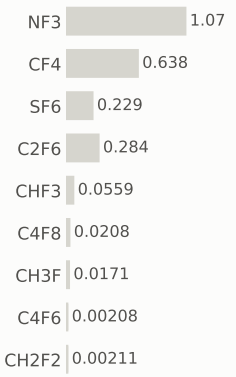

Step #5060: RIE

etch_anisotropic · RIE

1.04	222.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

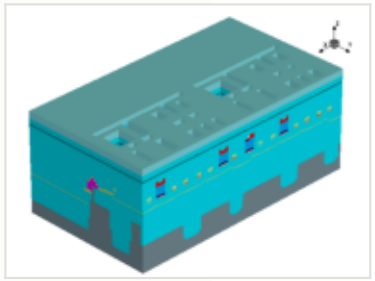

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

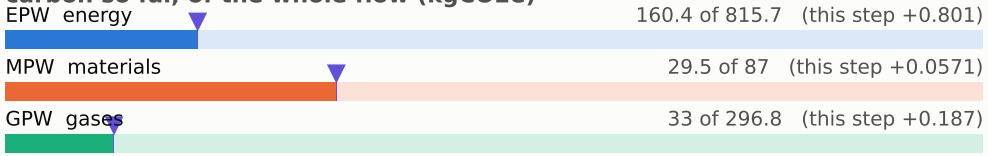

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

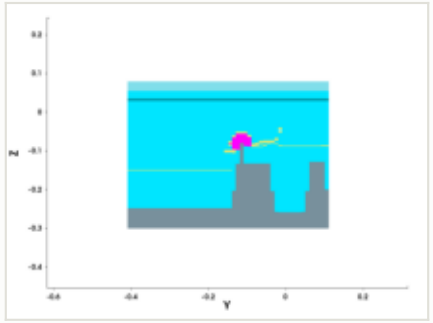

y cut at -0.150 µm

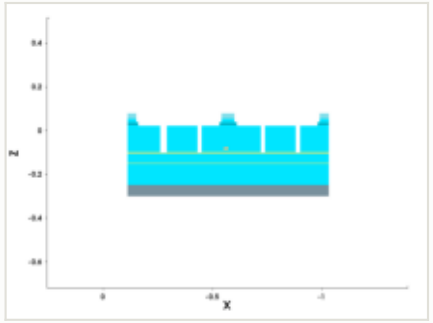

mask for this step

no mask for this step

steps by process area

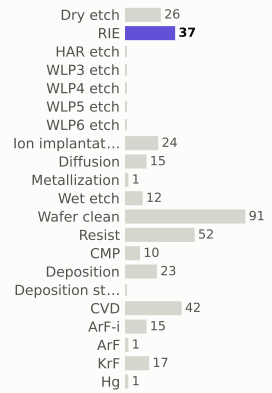

materials deposited (g)

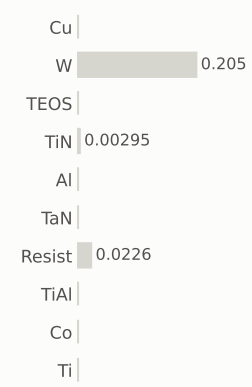

gases emitted (g)

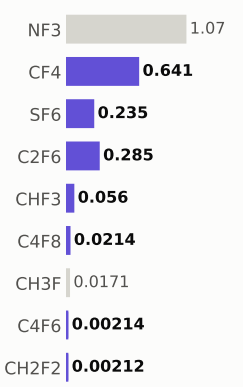

Step #5070: Spx_only

etch_strip · Spx_only

0	222.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

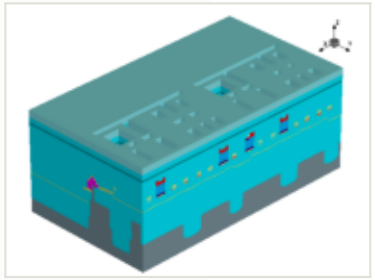

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 160.4 of 815.7

MPW materials 29.5 of 87

GPW gases 33 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

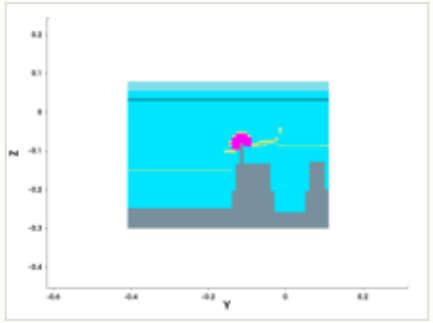

y cut at -0.150 µm

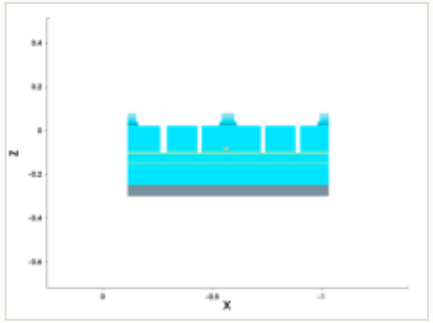

mask for this step

no mask for this step

steps by process area

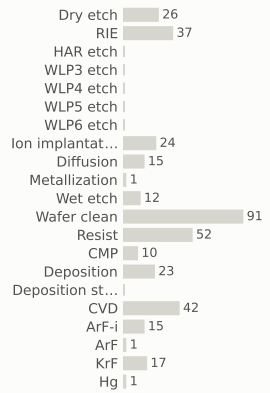

materials deposited (g)

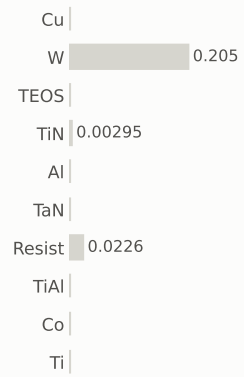

gases emitted (g)

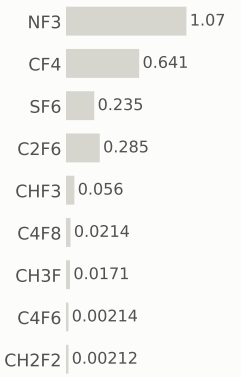

Step #5080: Wafer_clean

clean · Wafer_clean

0.169	223.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

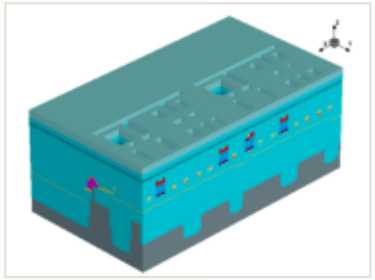

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

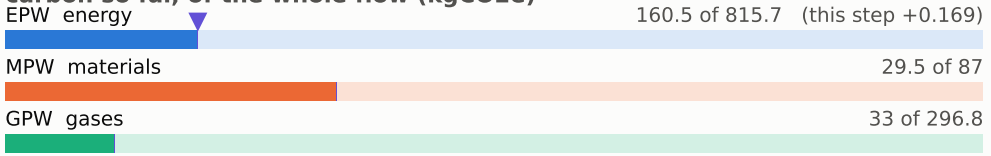

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

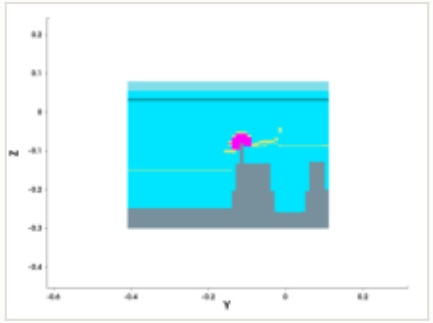

y cut at -0.150 µm

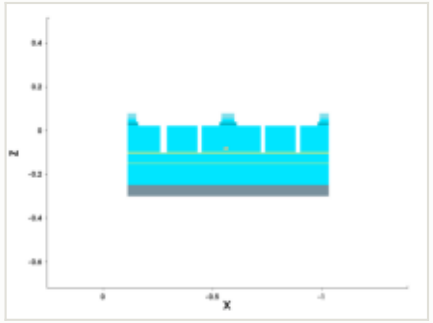

mask for this step

no mask for this step

steps by process area

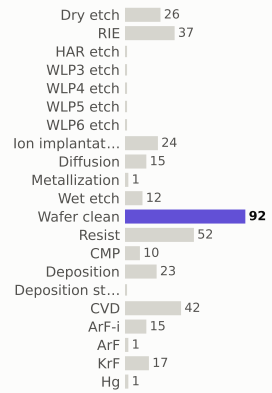

materials deposited (g)

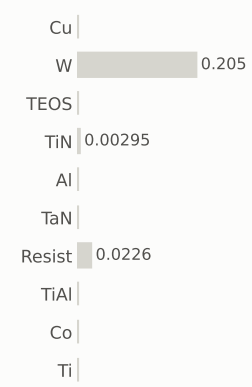

gases emitted (g)



Step #5090: Resist

depo_fill · Resist

0.169	223.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

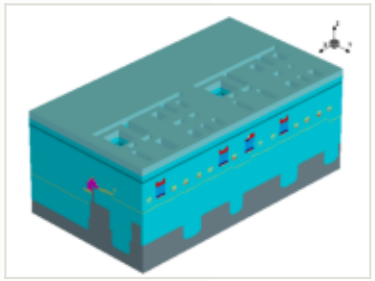

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.12 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

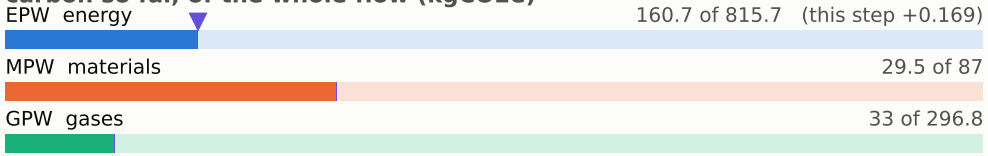

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

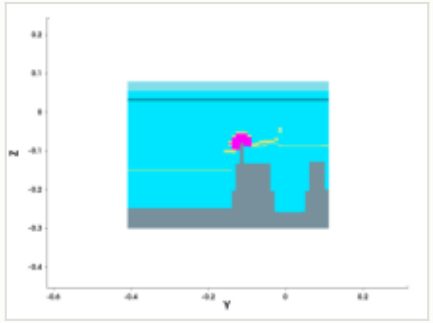

y cut at -0.150 µm

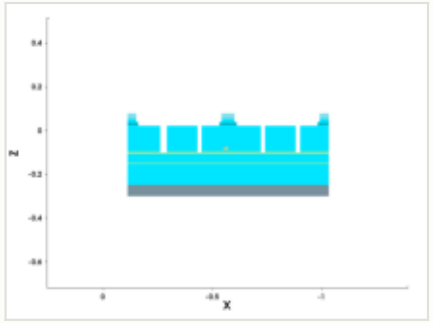

mask for this step

no mask for this step

steps by process area

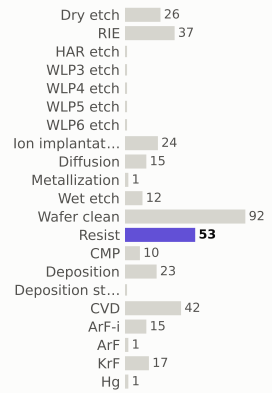

materials deposited (g)

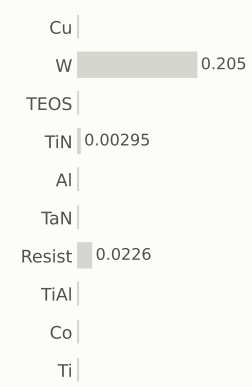

gases emitted (g)



Step #5100: Spx_only

depo_fill · Spx_only

0	223.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

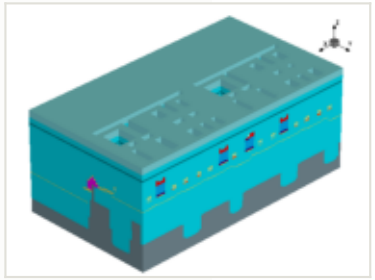

this step

process area	Spx_only
material	—
thickness	0.03 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

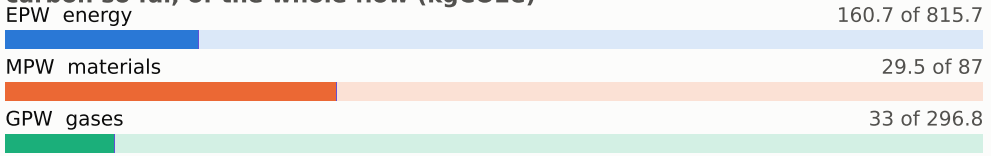

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

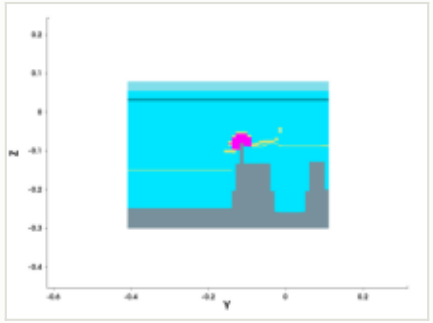

y cut at -0.150 µm

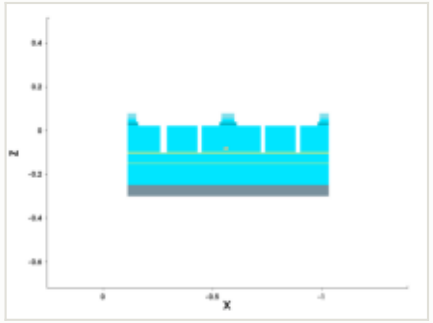

mask for this step

no mask for this step

steps by process area

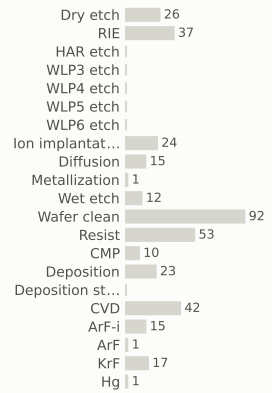

materials deposited (g)

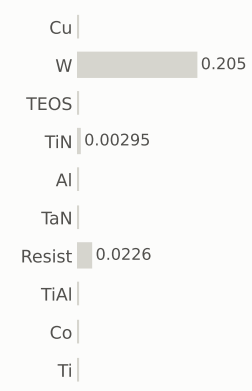

gases emitted (g)

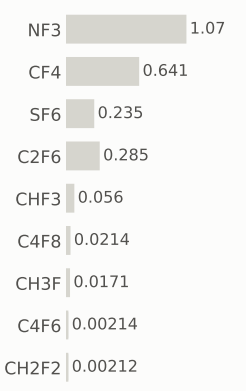

Step #5110: CVD

depo_fill · CVD

1.31	224.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

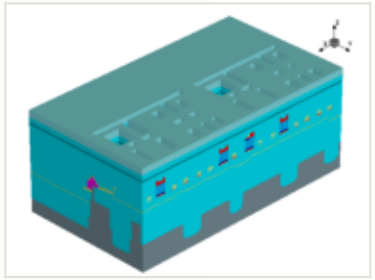

this step

process area	CVD
material	—
thickness	0.035 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

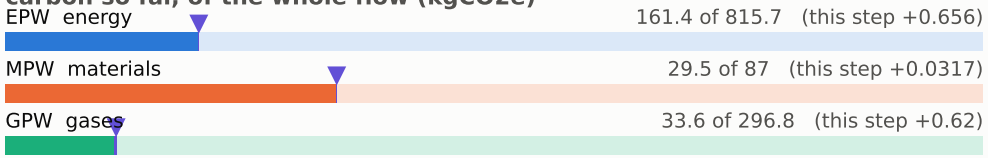

x cut at -0.570 µm

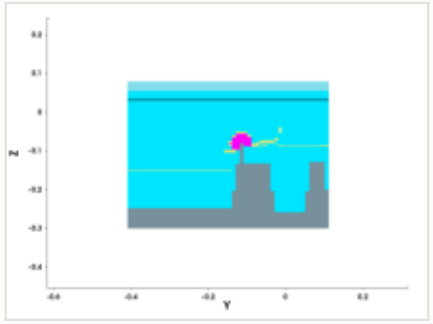

y cut at -0.150 µm

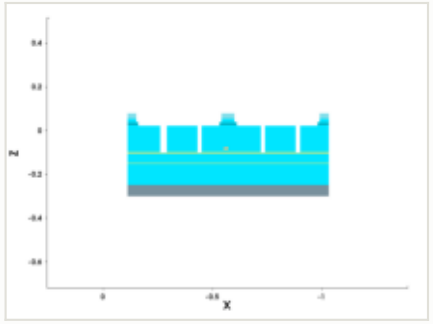

mask for this step

no mask for this step

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

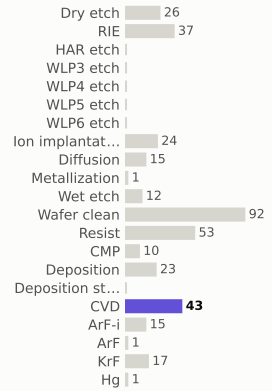

materials deposited (g)



gases emitted (g)

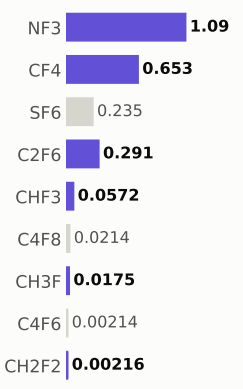

Step #5120: Wafer_clean

clean · Wafer_clean

0.169	224.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

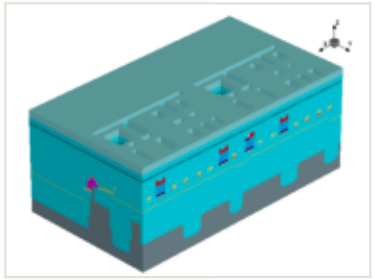

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

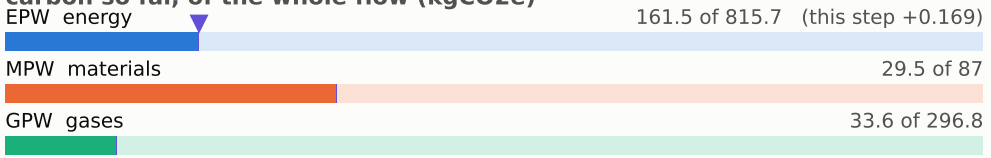

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

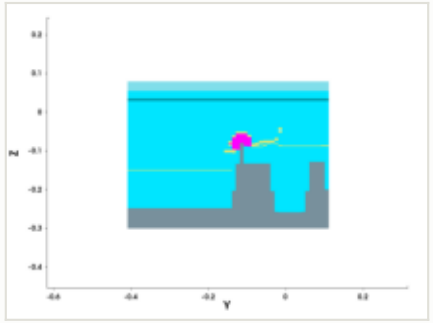

y cut at -0.150 µm

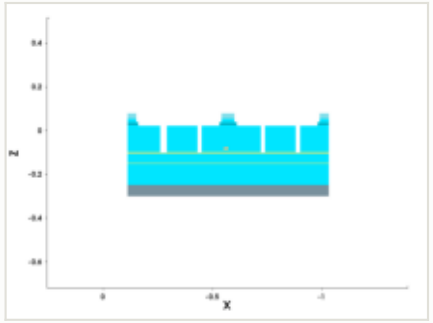

mask for this step

no mask for this step

steps by process area

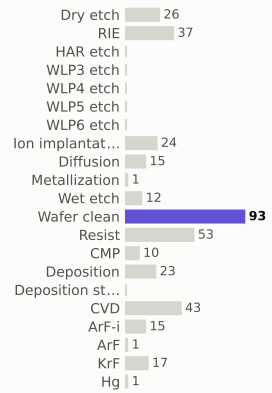

materials deposited (g)



gases emitted (g)

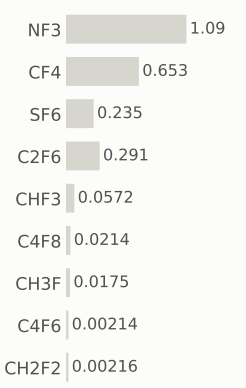

Step #5130: Resist

resist · Resist

0.169	224.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

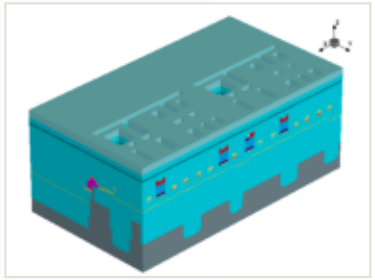

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

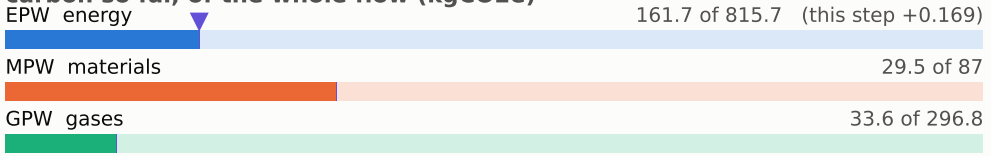

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

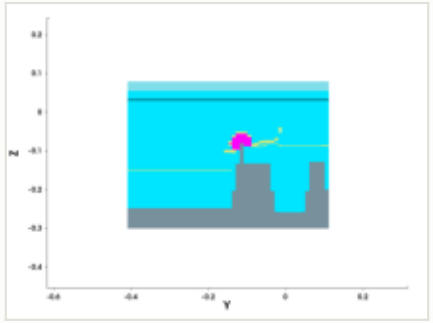

y cut at -0.150 µm

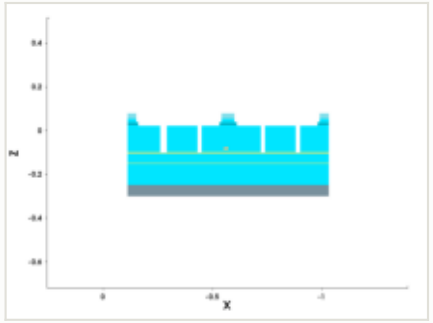

mask for this step

no mask for this step

steps by process area

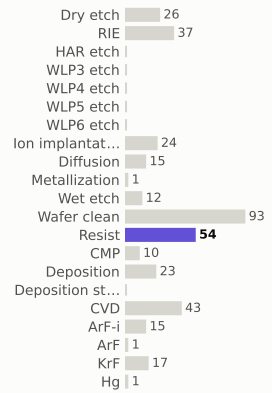

materials deposited (g)

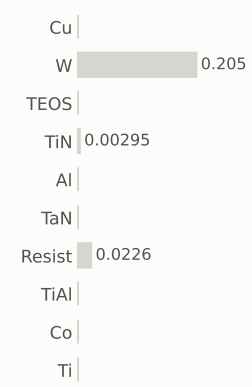

gases emitted (g)

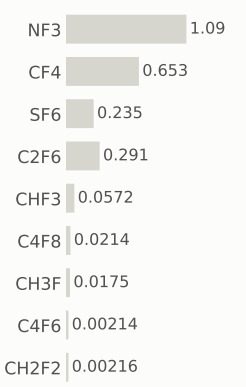

Step #5140: ArF-i

litho_patterning · ArF-i

0.217	225.0	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

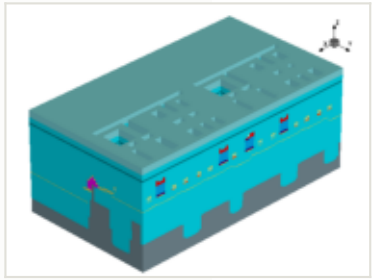

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

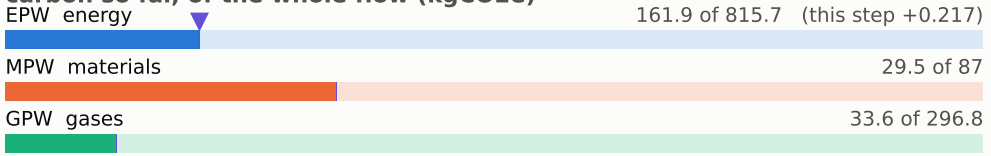

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

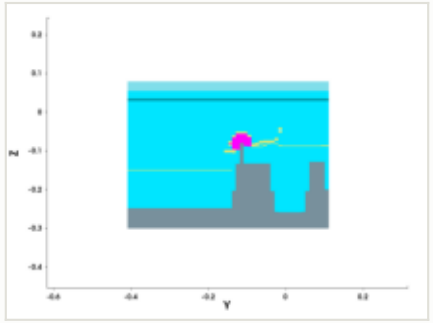

y cut at -0.150 µm

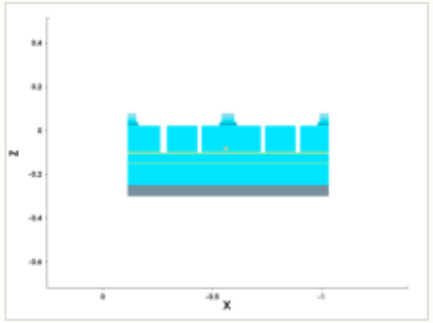

mask: layer 2016:0 (GDSII)



steps by process area

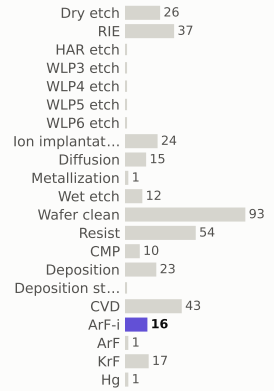

materials deposited (g)

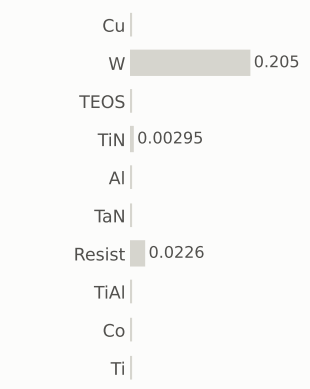

gases emitted (g)

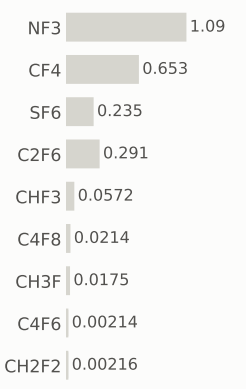

Step #5150: Spx_only

etch_anisotropic · Spx_only

0	225.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

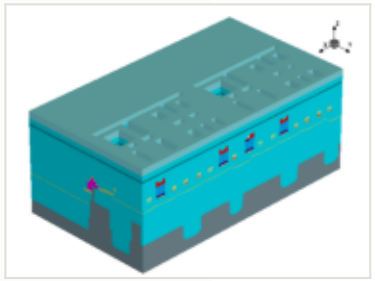

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

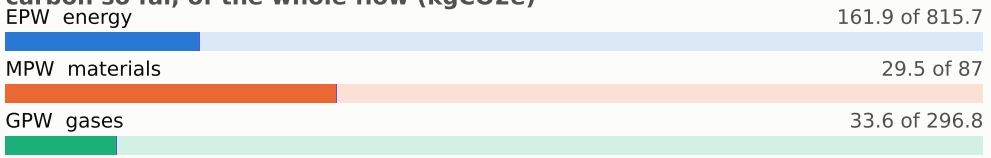

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

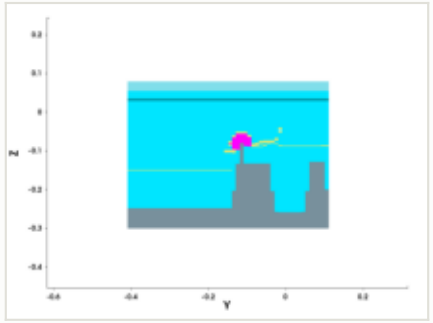

y cut at -0.150 µm

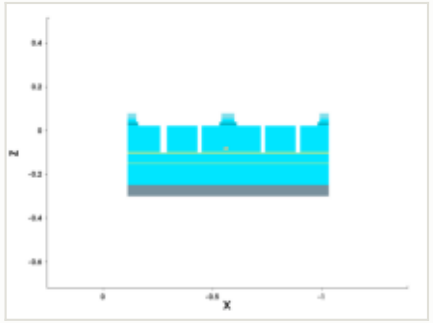

mask for this step

no mask for this step

steps by process area

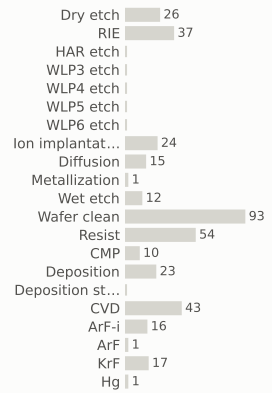

materials deposited (g)

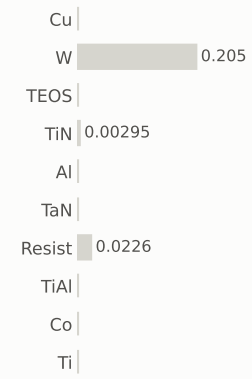

gases emitted (g)

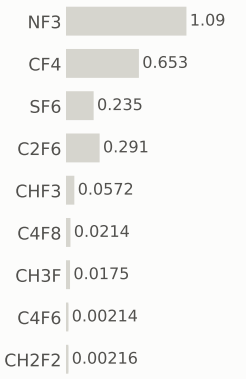

Step #5160: Spx_only

etch_anisotropic · Spx_only

0	225.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

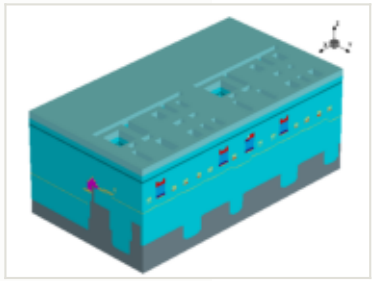

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

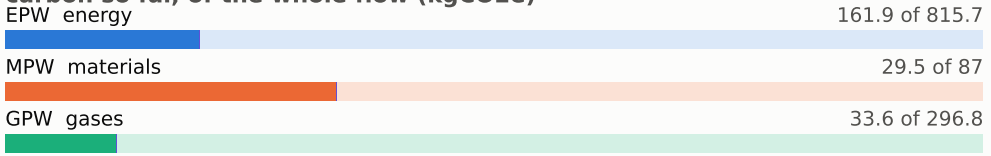

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

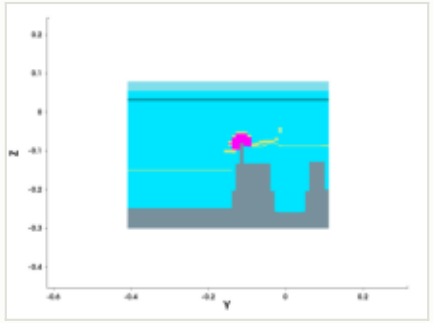

y cut at -0.150 µm

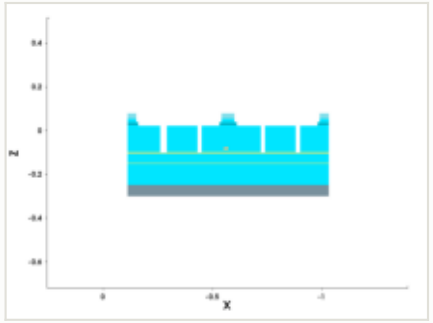

mask for this step

no mask for this step

steps by process area

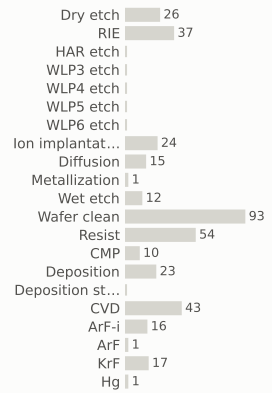

materials deposited (g)



gases emitted (g)

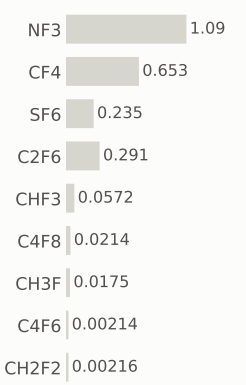

Step #5170: Spx_only

etch_anisotropic · Spx_only

0	225.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

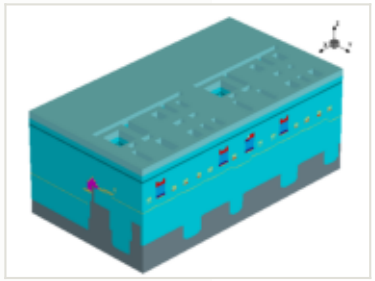

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

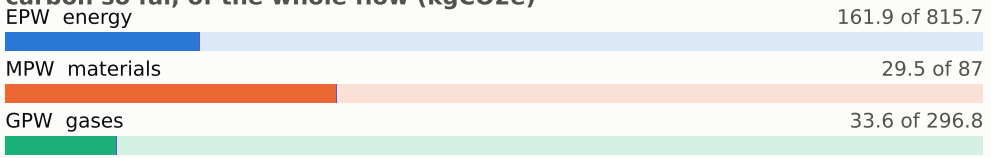

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

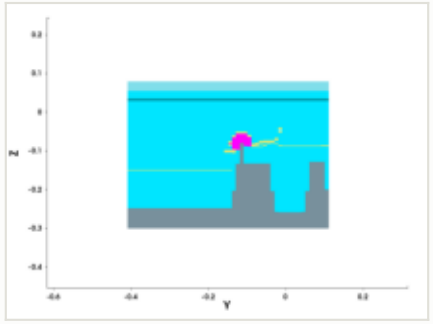

y cut at -0.150 µm

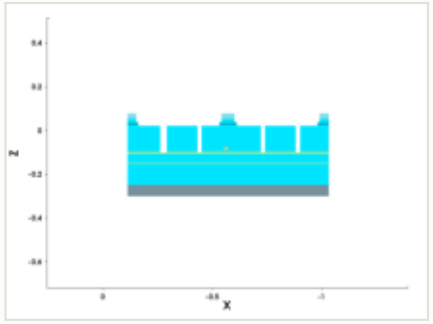

mask for this step

no mask for this step

steps by process area

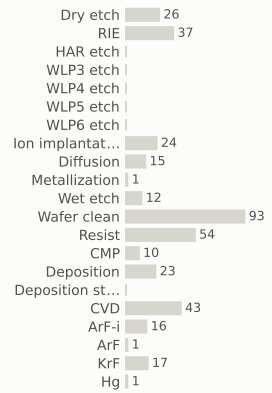

materials deposited (g)

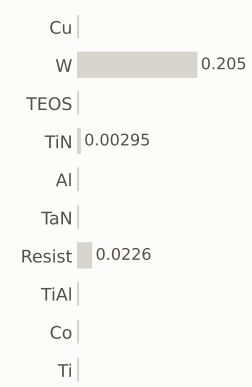

gases emitted (g)

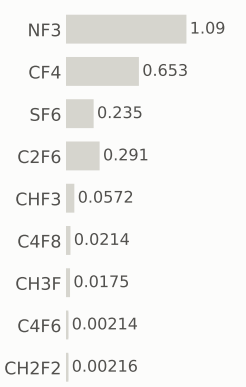

Step #5180: Spx_only

etch_anisotropic · Spx_only

0	225.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

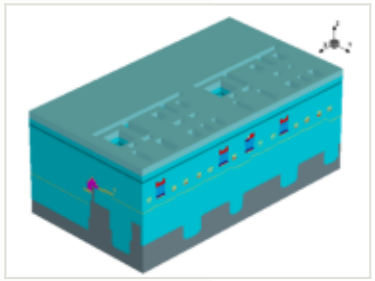

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

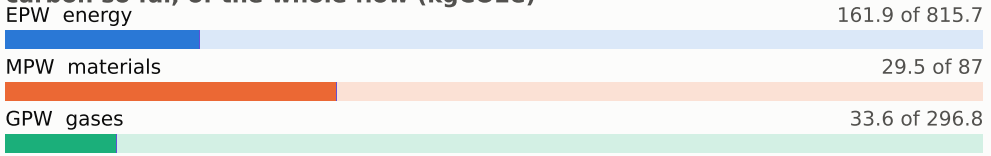

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

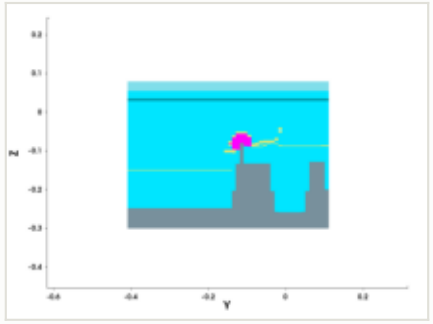

y cut at -0.150 µm

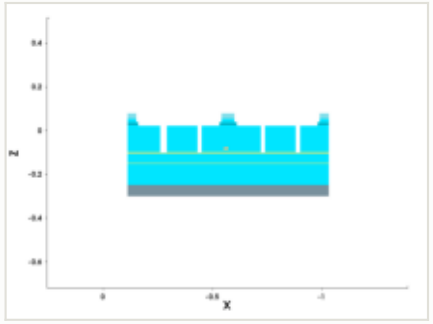

mask for this step

no mask for this step

steps by process area

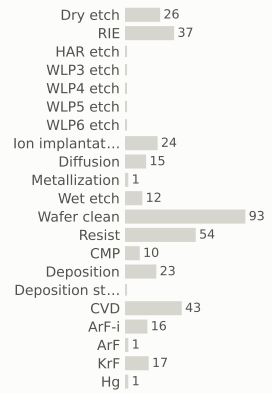

materials deposited (g)



gases emitted (g)

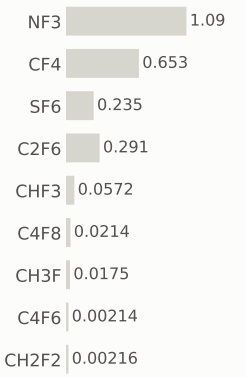

Step #5190: Spx_only

etch_anisotropic · Spx_only

0	225.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

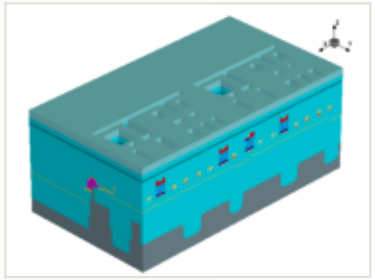

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

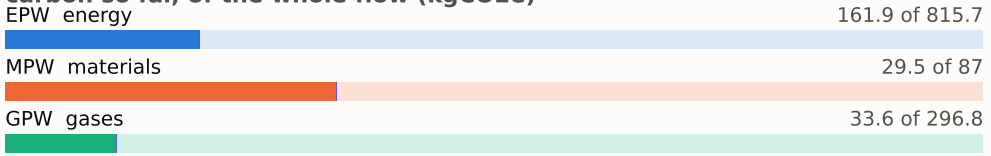

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

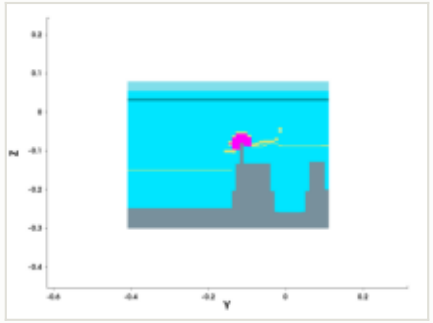

y cut at -0.150 µm

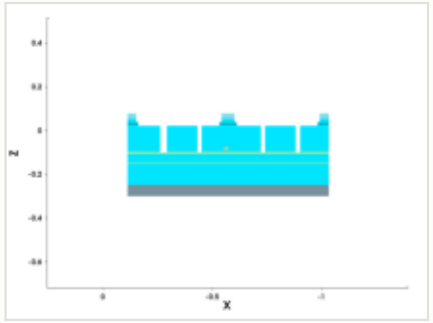

mask for this step

no mask for this step

steps by process area

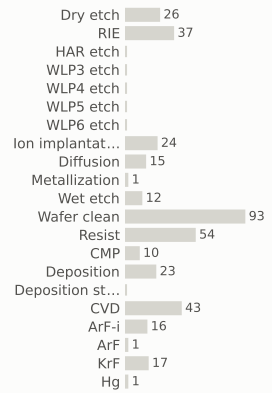

materials deposited (g)

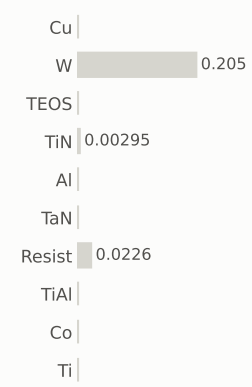

gases emitted (g)

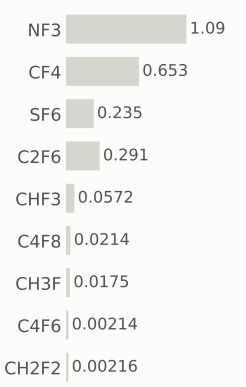

Step #5200: Spx_only

etch_ellipsoidal · Spx_only

0	225.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

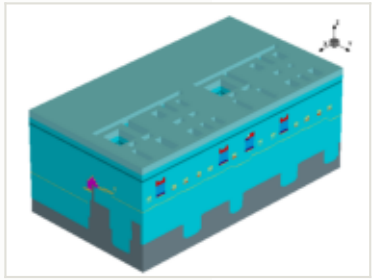

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

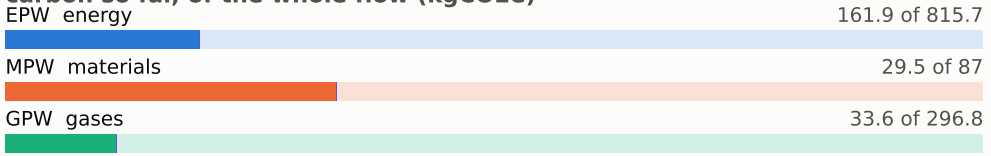

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

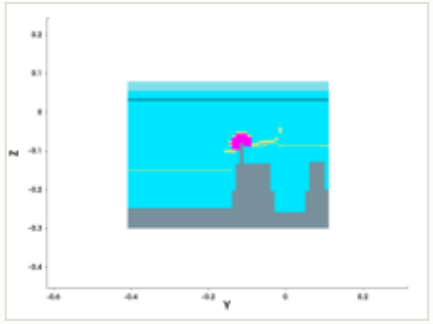

y cut at -0.150 µm

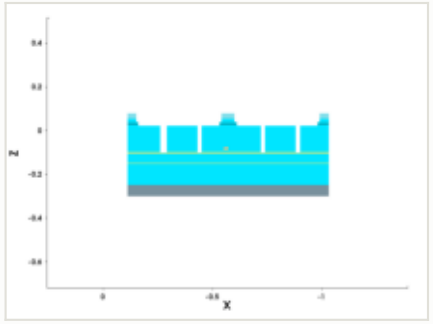

mask for this step

no mask for this step

steps by process area

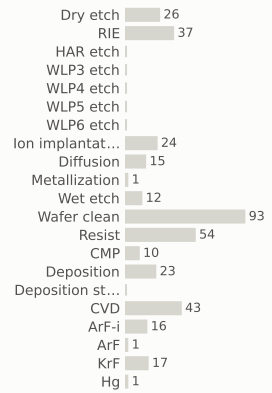

materials deposited (g)



gases emitted (g)

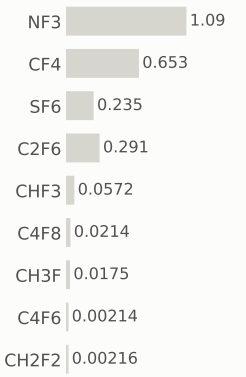

Step #5210: RIE

etch_anisotropic · RIE

1.04	226.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

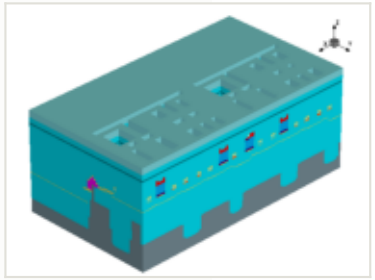

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

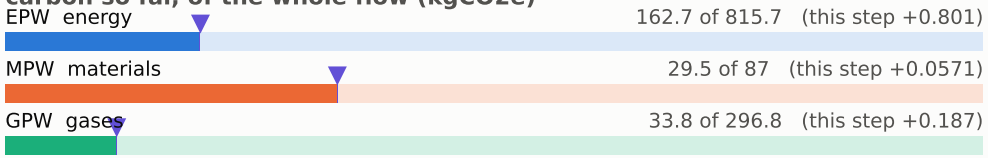

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

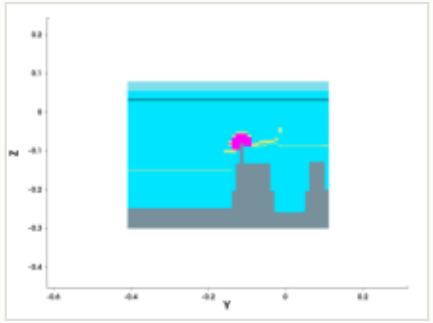

y cut at -0.150 µm

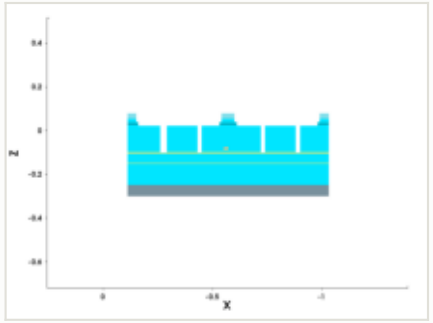

mask for this step

no mask for this step

steps by process area

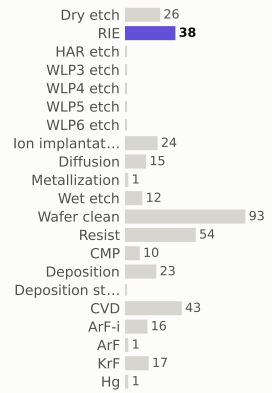

materials deposited (g)

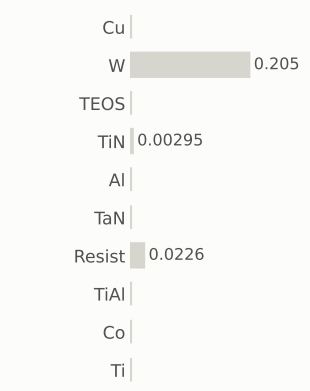

gases emitted (g)

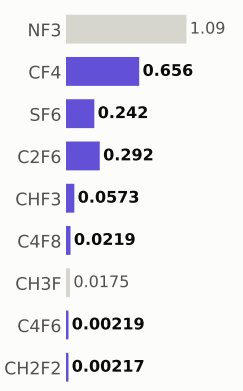

Step #5220: Dry_etch

etch_strip · Dry_etch

0.801	226.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

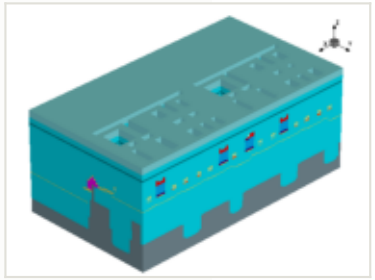

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

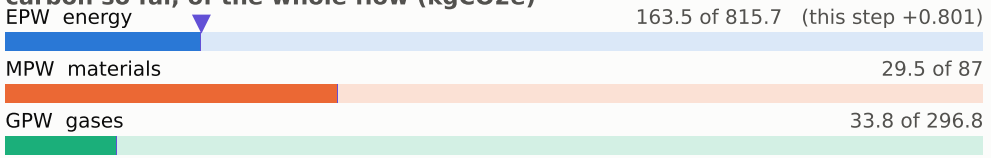

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

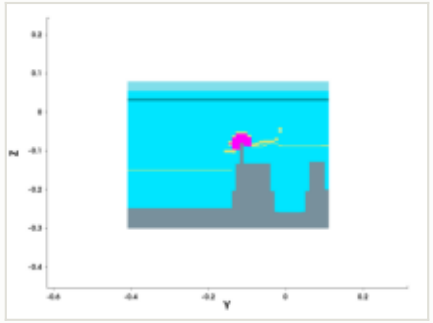

y cut at -0.150 µm

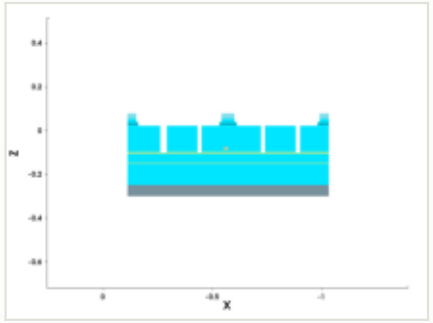

mask for this step

no mask for this step

steps by process area

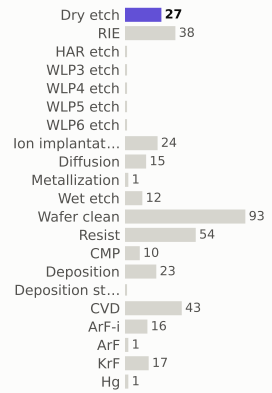

materials deposited (g)



gases emitted (g)

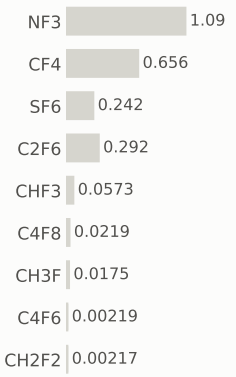

Step #5230: Spx_only

etch_anisotropic · Spx_only

0	226.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

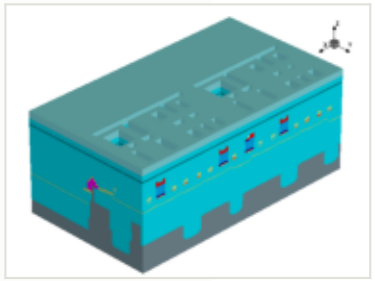

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

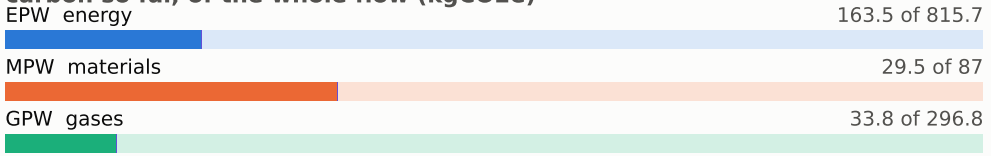

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

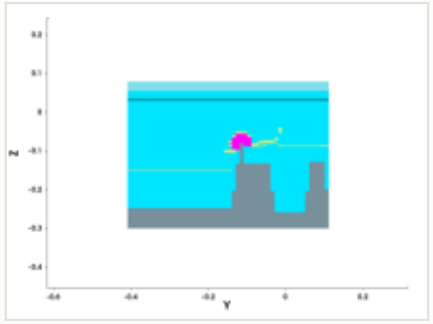

y cut at -0.150 µm

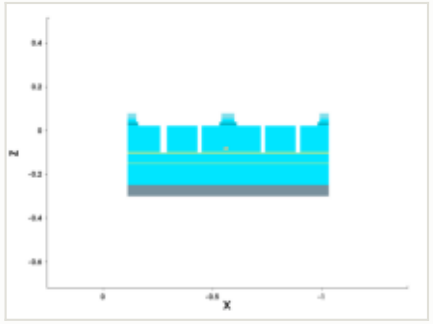

mask for this step

no mask for this step

steps by process area

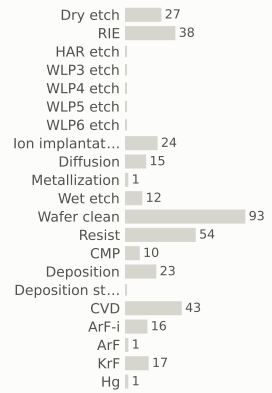

materials deposited (g)

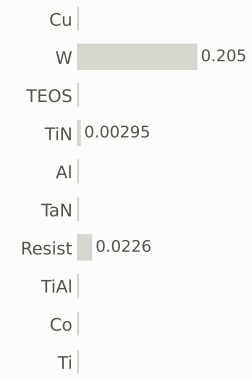

gases emitted (g)

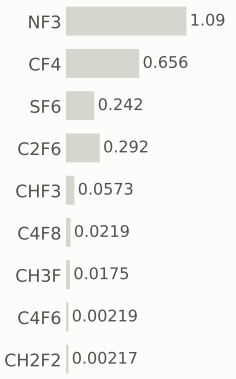

Step #5240: Spx_only

depo_isotropic · Spx_only

0	226.8	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

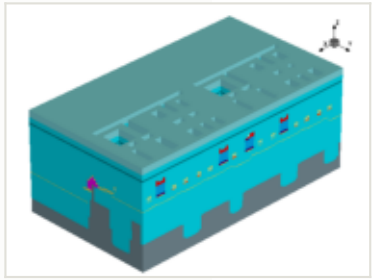

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.003 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

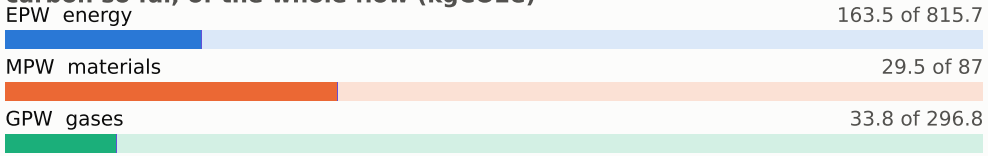

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

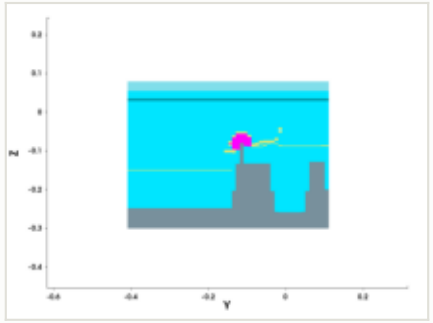

y cut at -0.150 µm

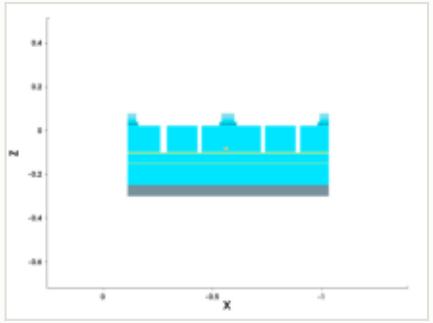

mask for this step

no mask for this step

steps by process area

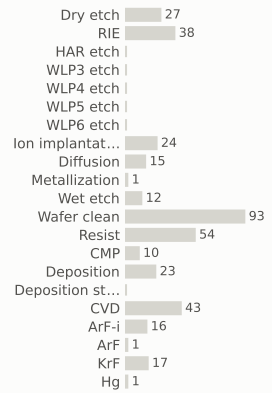

materials deposited (g)

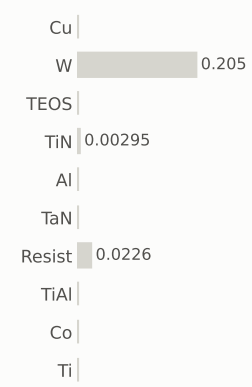

gases emitted (g)

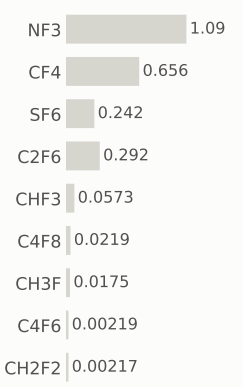

Step #5250: Wafer_clean

clean · Wafer_clean

0.169	227.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

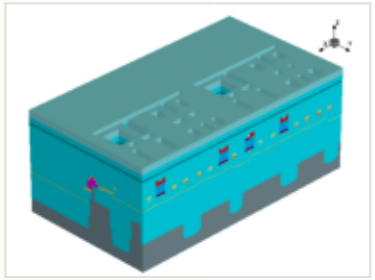

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

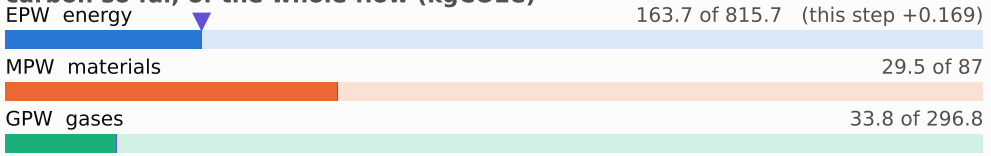

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

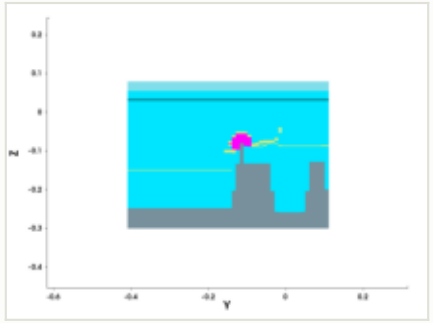

y cut at -0.150 µm

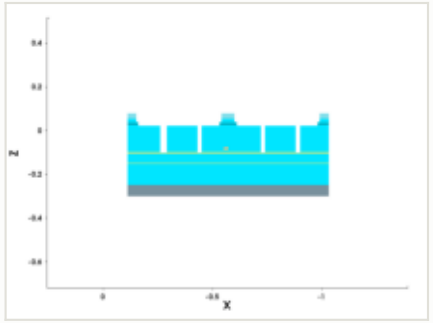

mask for this step

no mask for this step

steps by process area

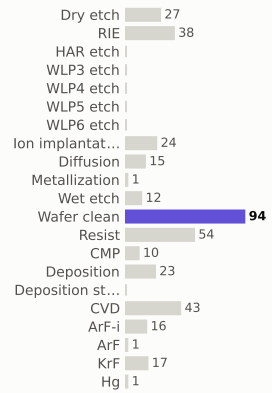

materials deposited (g)

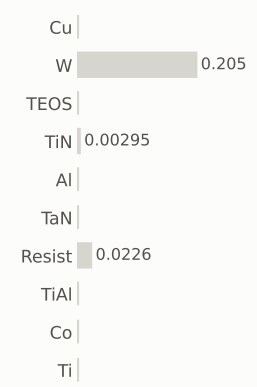

gases emitted (g)



Step #5260: Dry_etch

treatment · Dry_etch

0.801	227.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

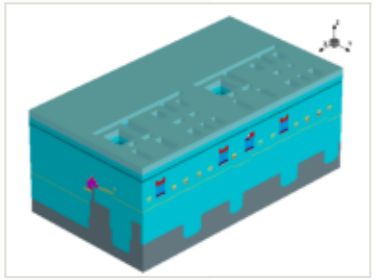

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

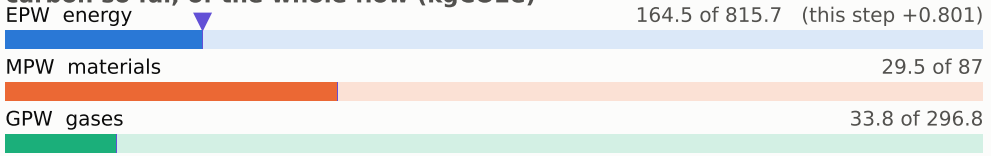

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

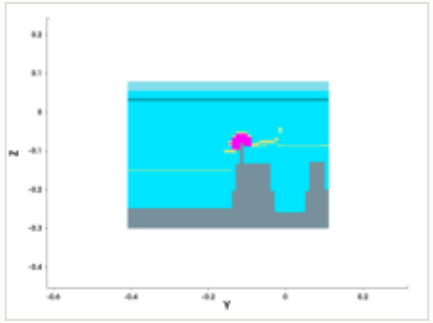

y cut at -0.150 µm

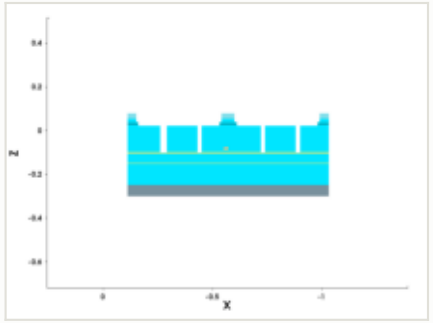

mask for this step

no mask for this step

steps by process area

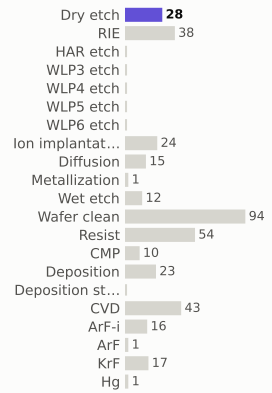

materials deposited (g)



gases emitted (g)

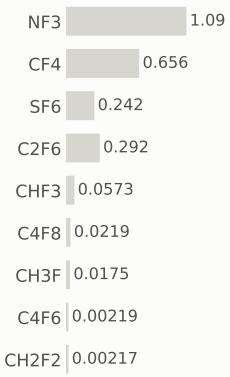

Step #5270: Metallization

depo_isotropic · Metallization

1.2	229.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

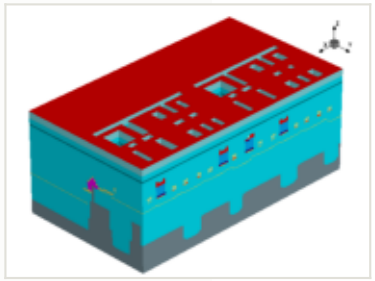

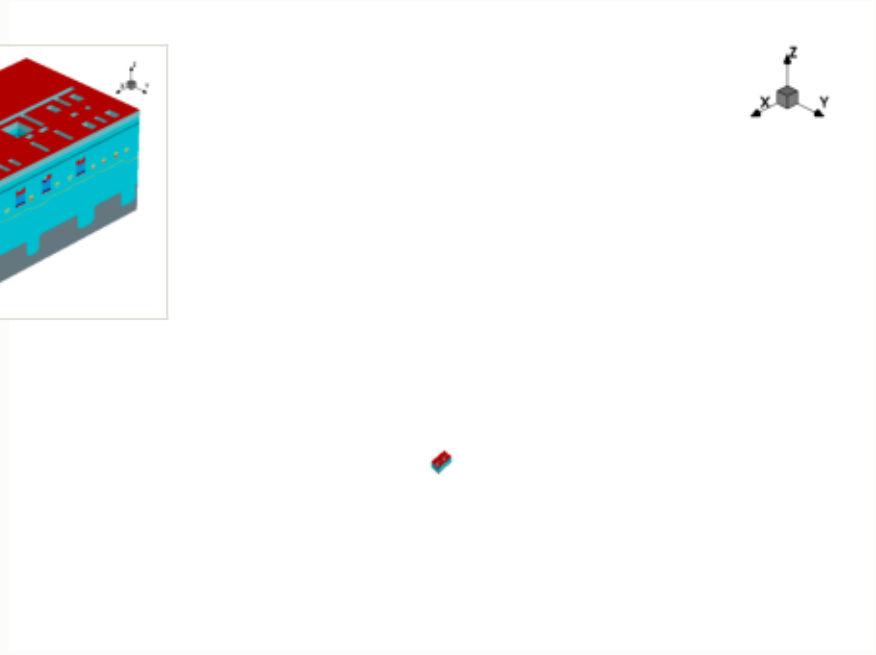

this step

process area	Metallization
material	Ti
thickness	0.001 µm
material GWP	47.6334 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	1.52e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

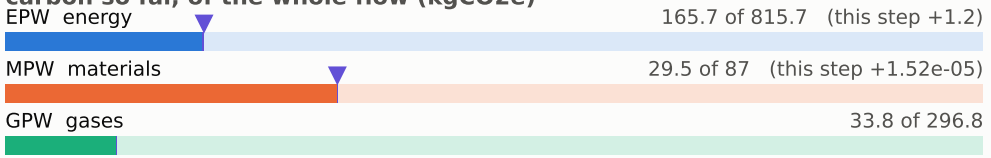

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

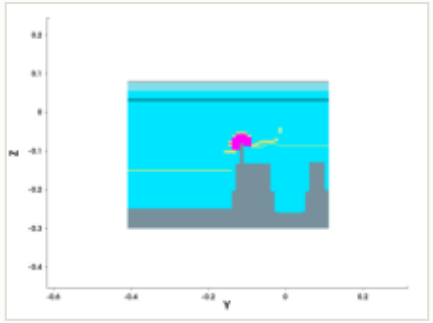

y cut at -0.150 µm

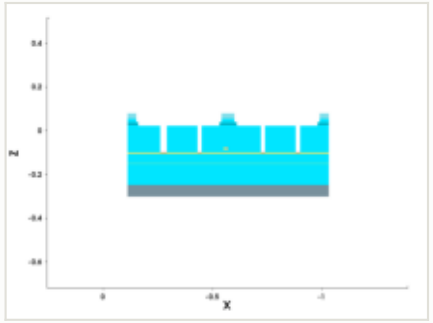

mask for this step

no mask for this step

steps by process area

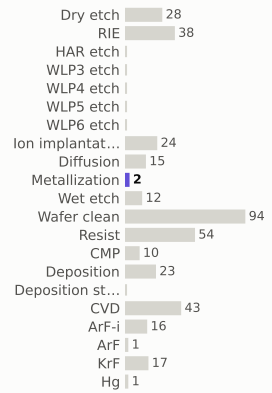

materials deposited (g)

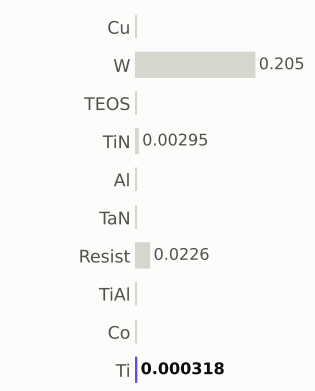

gases emitted (g)

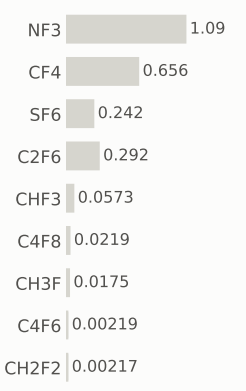

Step #5280: Spx_only

depo_isotropic · Spx_only

4.86e-05	229.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

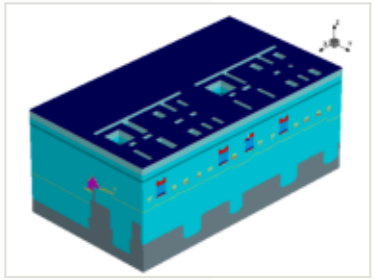

this step

process area	Spx_only
material	TiN
thickness	0.003 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	4.86e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**4.86e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

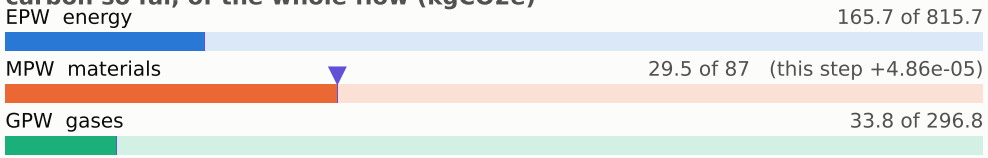

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

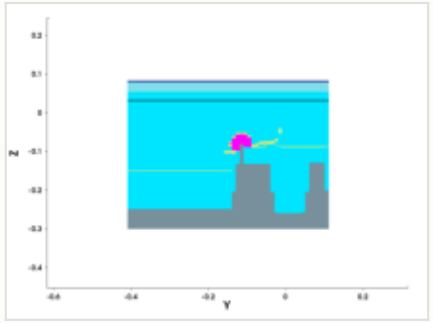

y cut at -0.150 µm

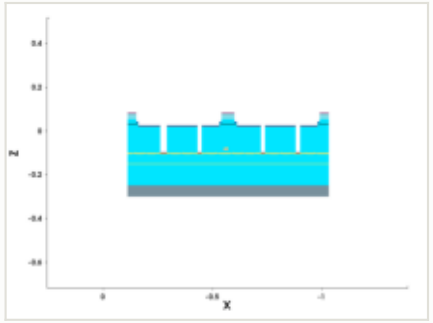

mask for this step

no mask for this step

steps by process area

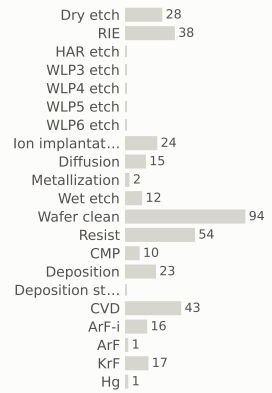

materials deposited (g)

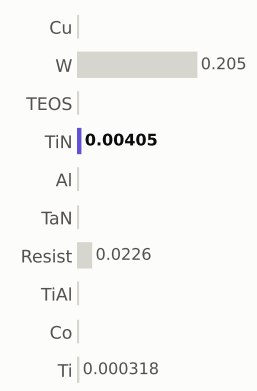

gases emitted (g)

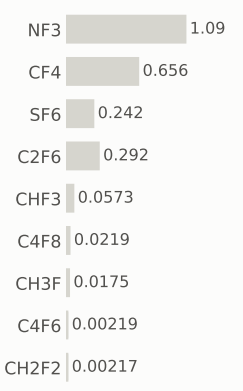

Step #5290: Wafer_clean

clean · Wafer_clean

0.169	229.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

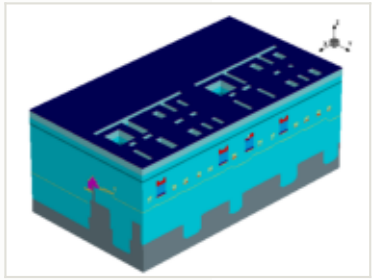

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

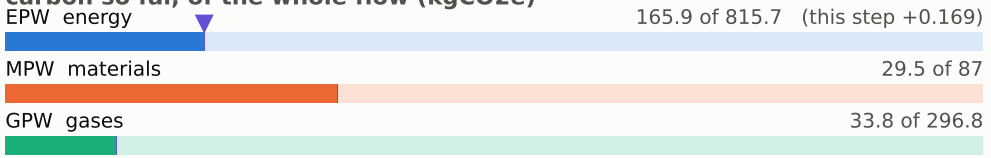

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

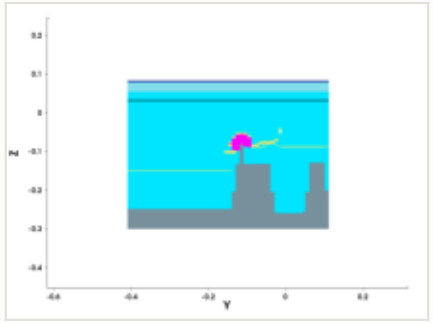

y cut at -0.150 µm

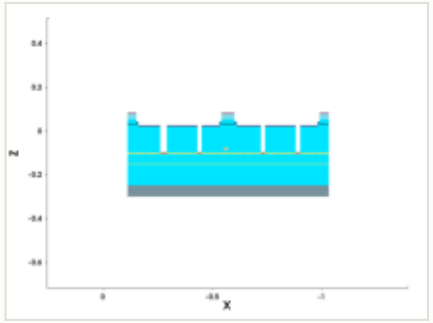

mask for this step

no mask for this step

steps by process area

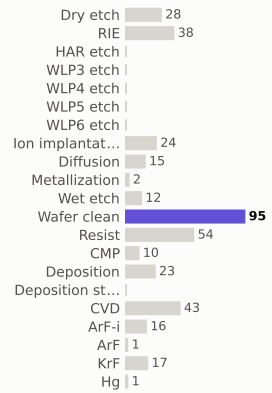

materials deposited (g)

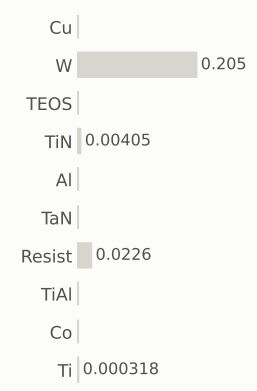

gases emitted (g)

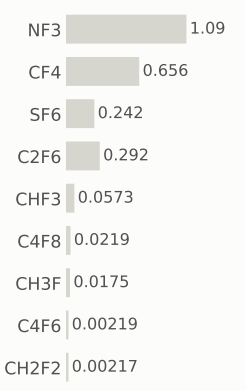

Step #5300: Diffusion

anneal · Diffusion

0.801	230.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

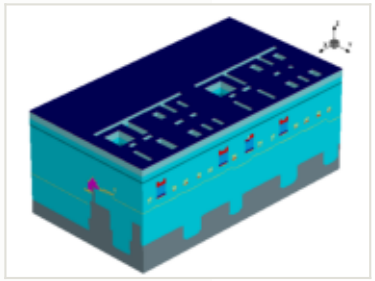

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

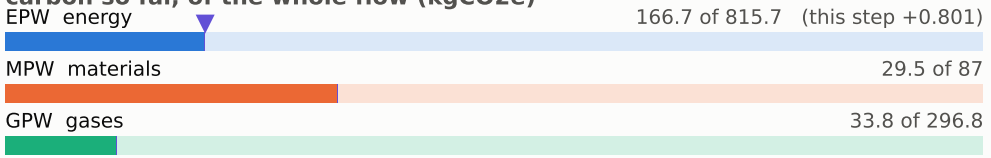

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

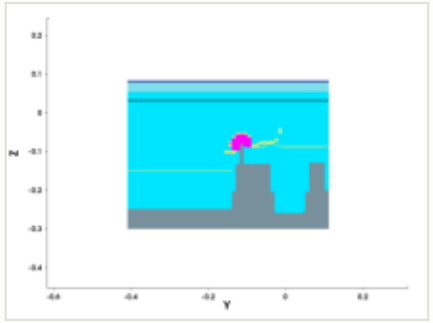

y cut at -0.150 µm

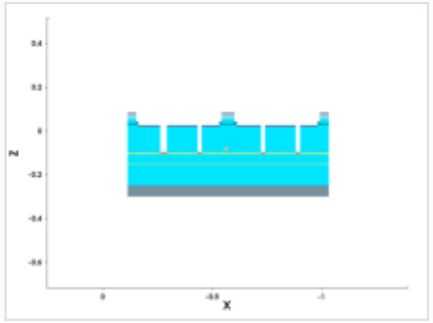

mask for this step

no mask for this step

steps by process area

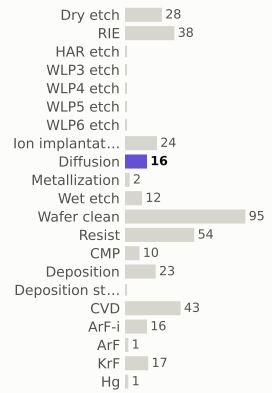

materials deposited (g)

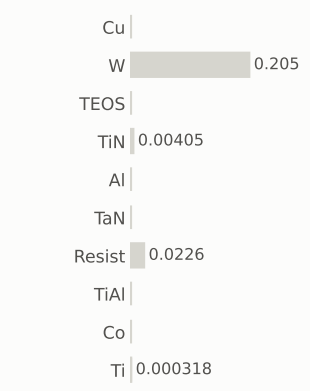

gases emitted (g)

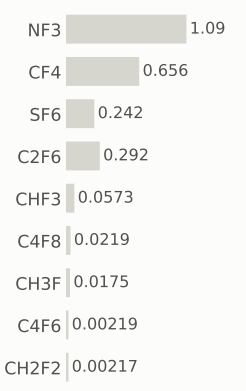

Step #5310: Metallization

depo_fill · Metallization

1.22	231.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

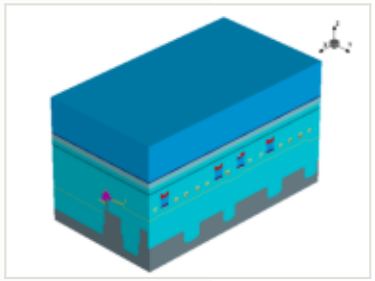

this step

process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

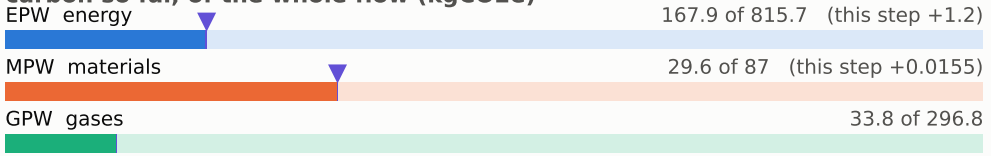

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

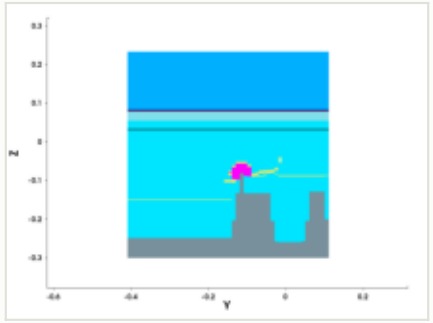

y cut at -0.150 µm

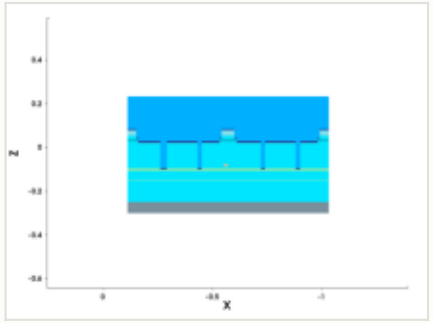

mask for this step

no mask for this step

steps by process area

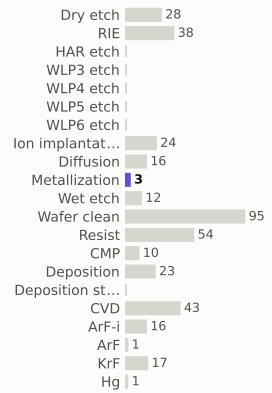

materials deposited (g)

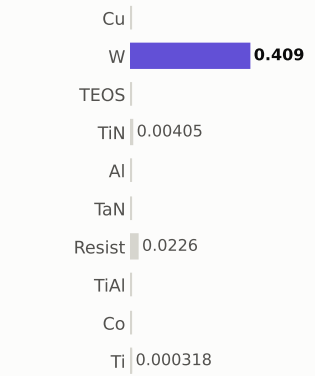

gases emitted (g)

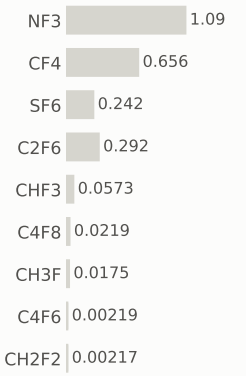

Step #5320: CMP

etch_cmp · CMP

0.169	231.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

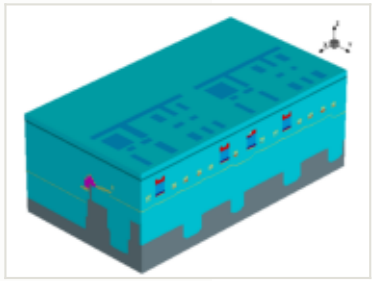

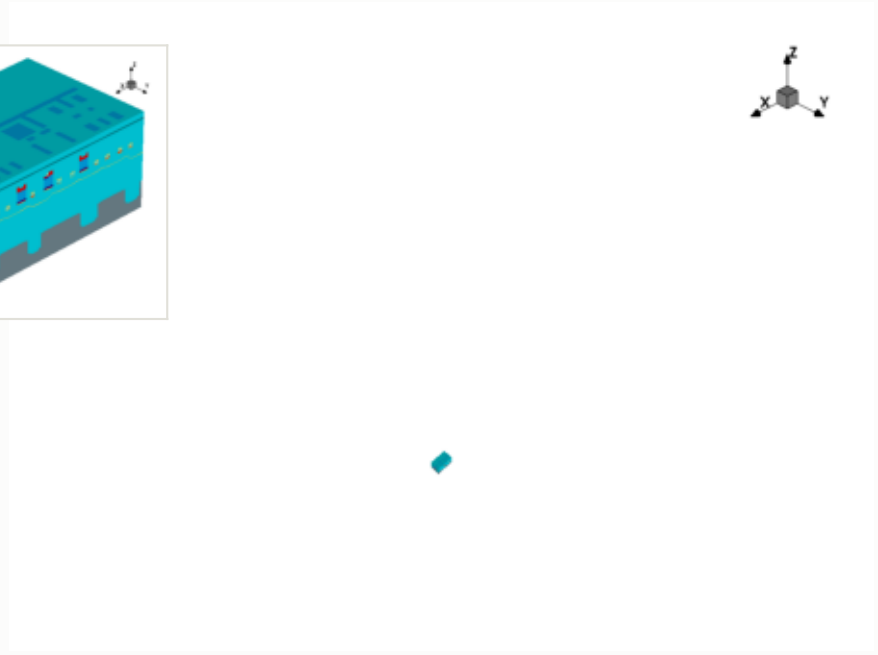

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

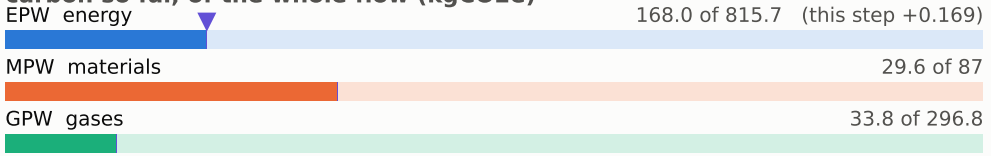

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

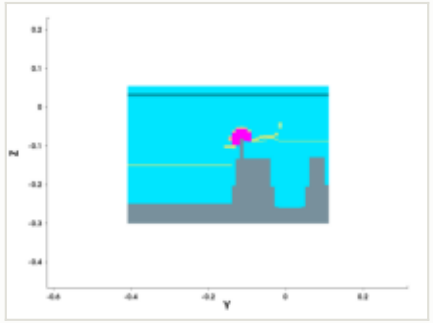

y cut at -0.150 µm

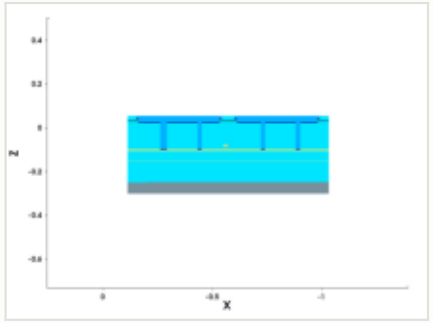

mask for this step

no mask for this step

steps by process area

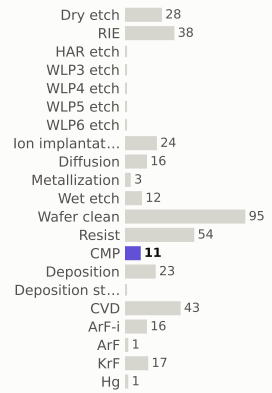

materials deposited (g)

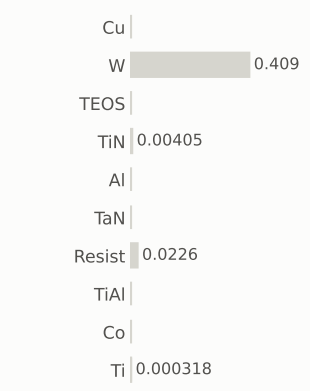

gases emitted (g)

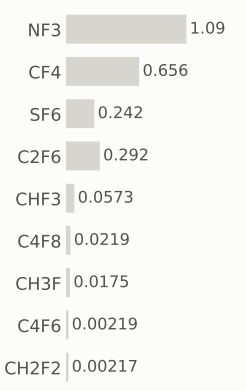

Step #5330: Diffusion

anneal · Diffusion

0.801	232.2	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

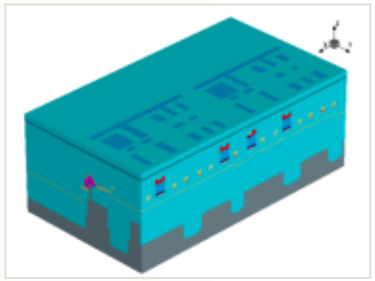

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

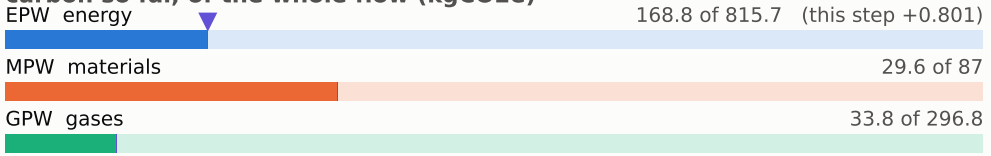

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

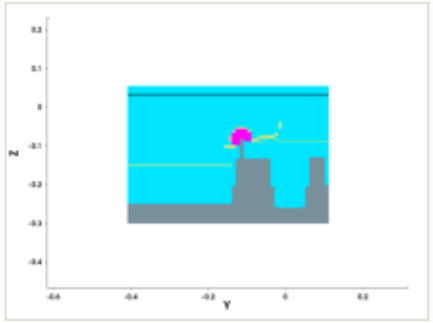

y cut at -0.150 µm

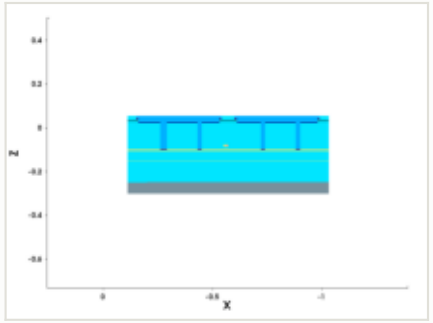

mask for this step

no mask for this step

steps by process area

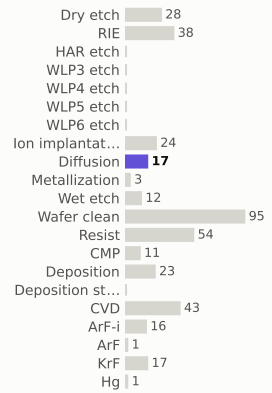

materials deposited (g)

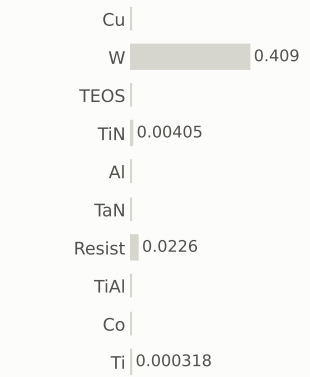

gases emitted (g)

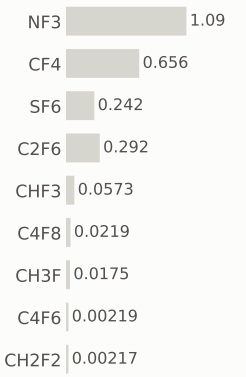

Step #5350: Deposition

depo_fill · Deposition

0.656	232.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

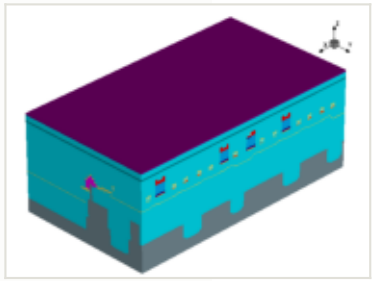

this step

process area	Deposition
material	—
thickness	0.006 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

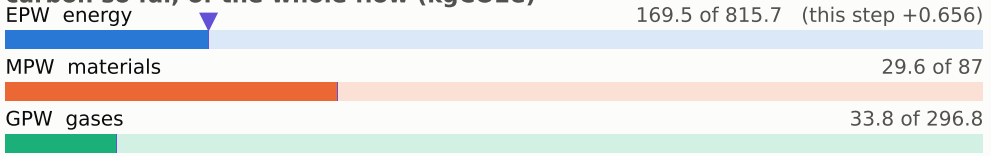

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

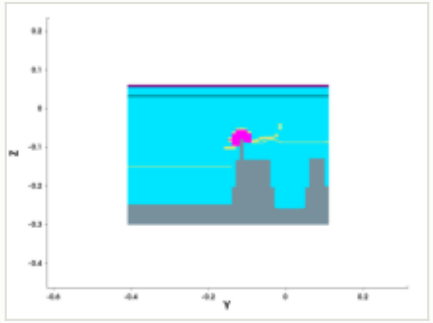

y cut at -0.150 µm

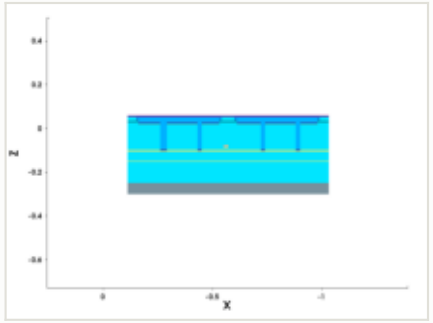

mask for this step

no mask for this step

steps by process area

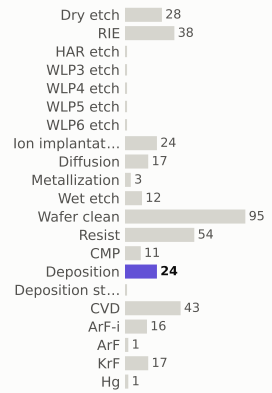

materials deposited (g)

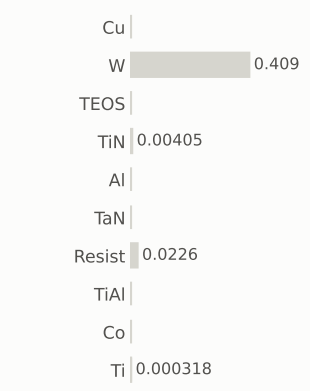

gases emitted (g)

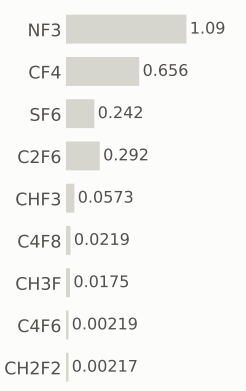

Step #5360: CVD

depo_fill · CVD

1.31	234.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

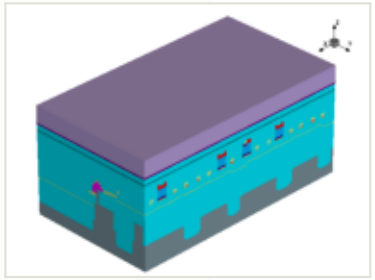

this step

process area	CVD
material	—
thickness	0.066 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

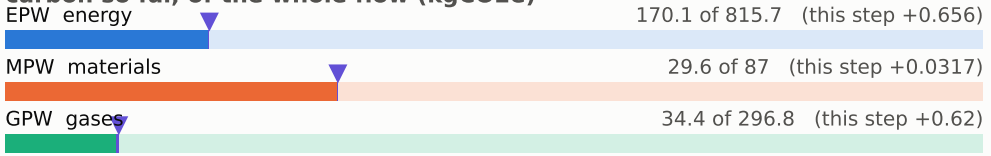

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

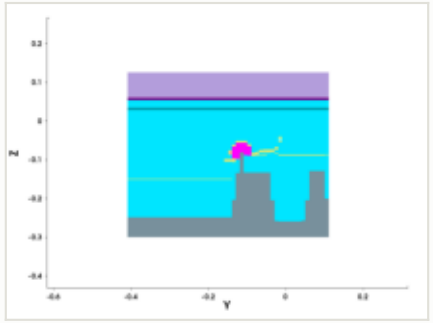

y cut at -0.150 µm

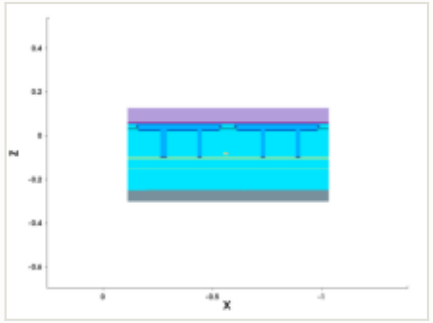

mask for this step

no mask for this step

steps by process area

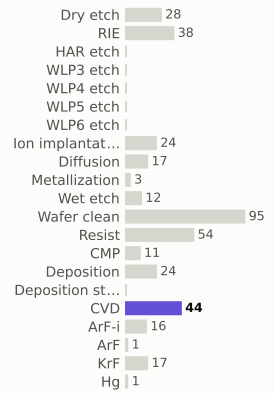

materials deposited (g)

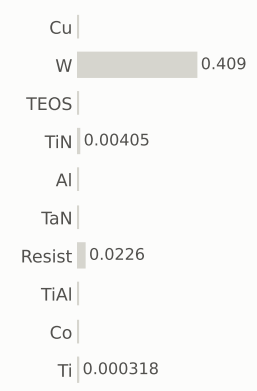

gases emitted (g)

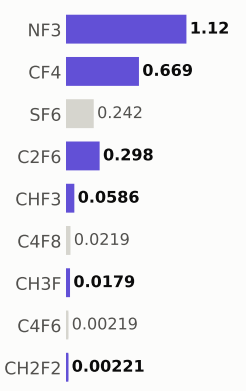

Step #5370: Diffusion

anneal · Diffusion

0.801	234.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

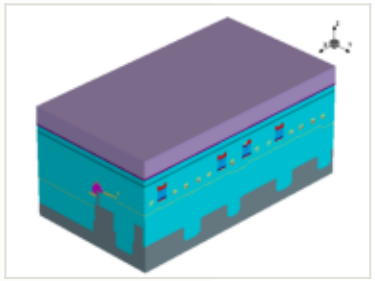

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

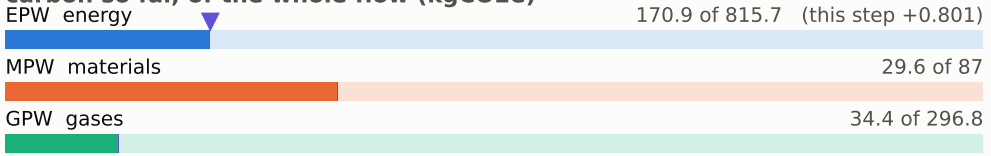

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

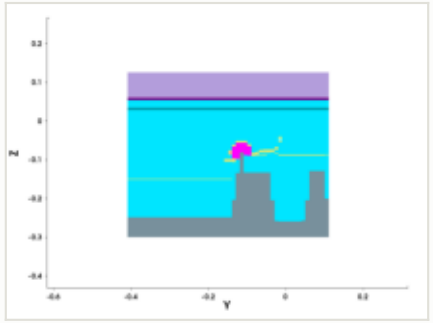

y cut at -0.150 µm

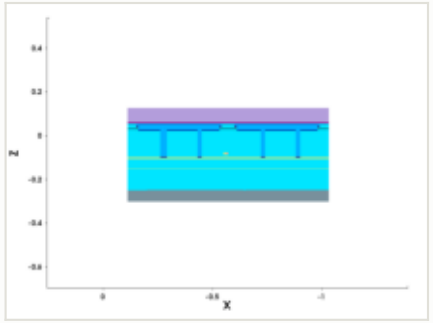

mask for this step

no mask for this step

steps by process area

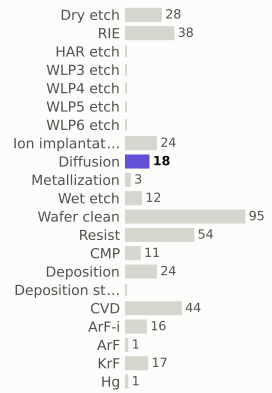

materials deposited (g)

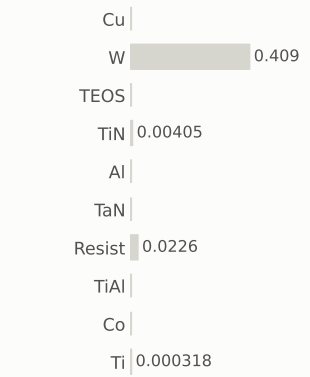

gases emitted (g)

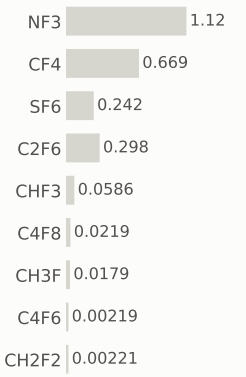

Step #5380: Wafer_clean

clean · Wafer_clean

0.169	235.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

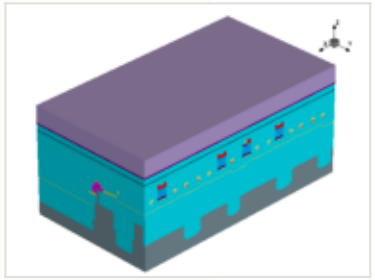

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

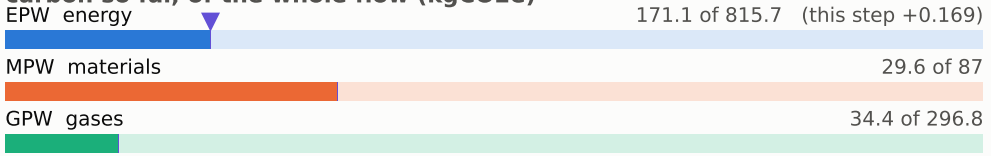

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

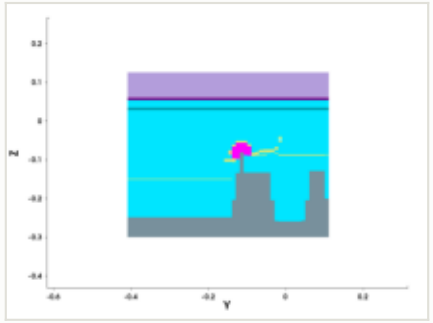

y cut at -0.150 µm

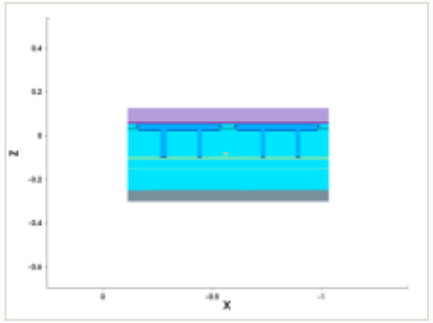

mask for this step

no mask for this step

steps by process area

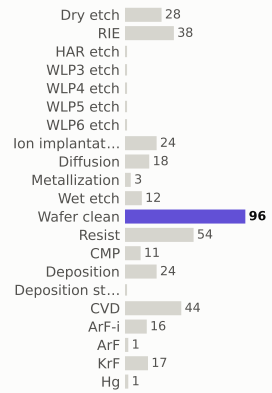

materials deposited (g)

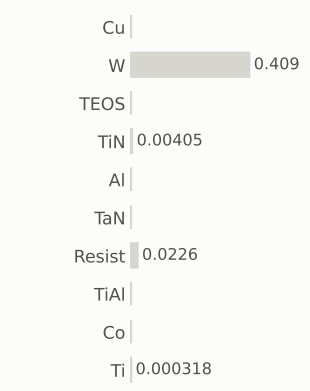

gases emitted (g)

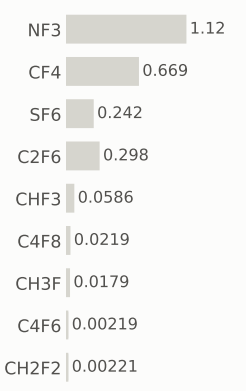

Step #5390: CVD

depo_fill · CVD

1.31	236.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

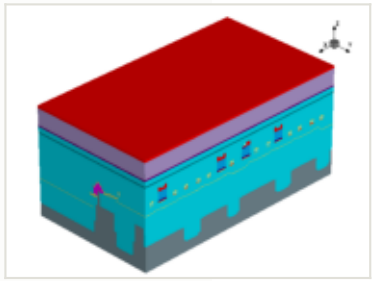

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

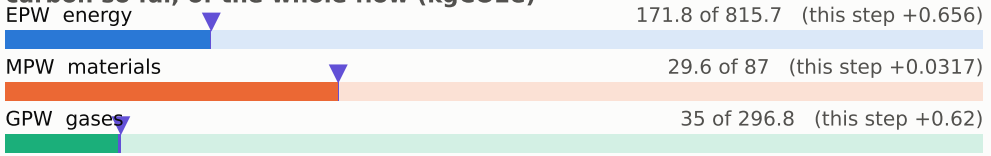

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

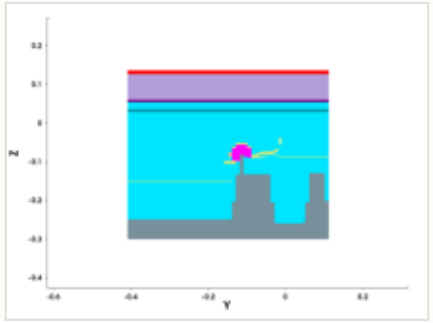

y cut at -0.150 µm

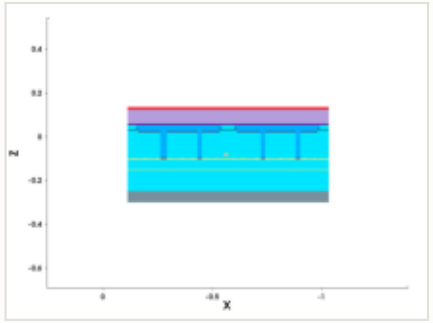

mask for this step

no mask for this step

steps by process area

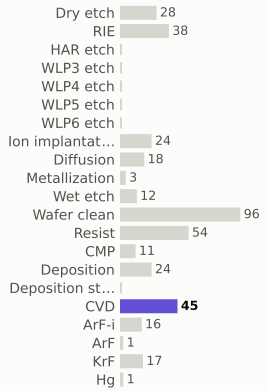

materials deposited (g)

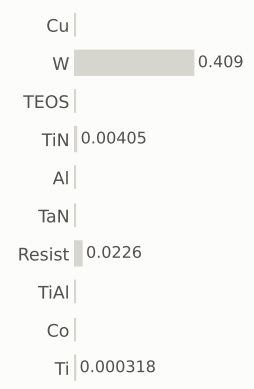

gases emitted (g)

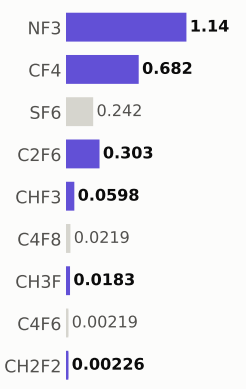

Step #5400: Deposition

depo_fill · Deposition

0.657	237.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

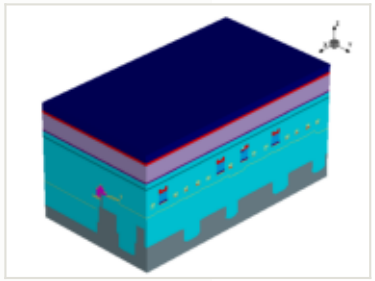

this step

process area	Deposition	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.000486 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.657 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

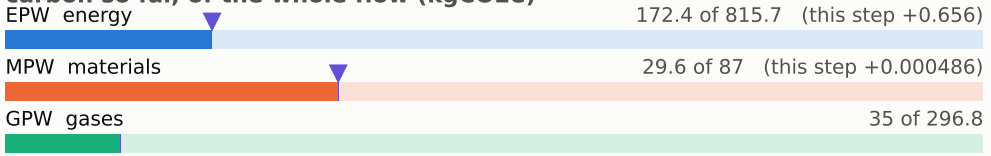

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

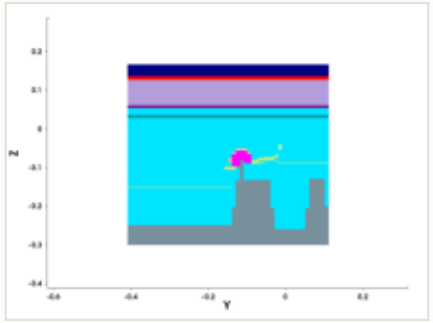

y cut at -0.150 µm

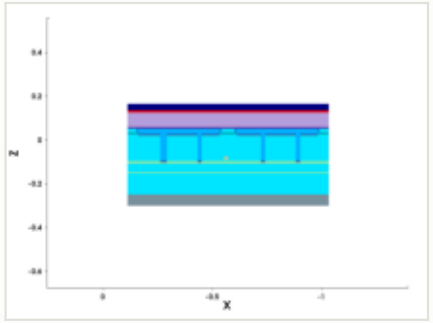

mask for this step

no mask for this step

steps by process area

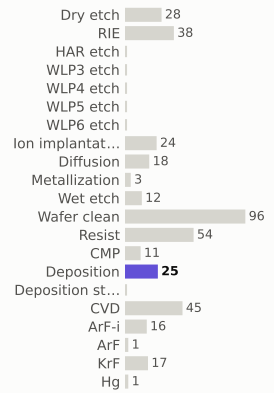

materials deposited (g)

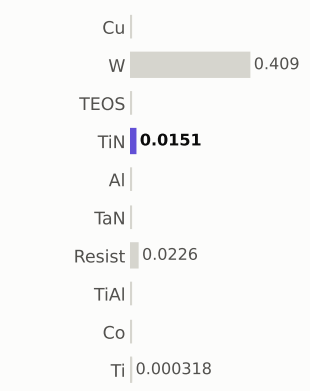

gases emitted (g)

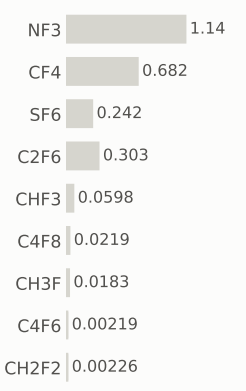

Step #5410: Wafer_clean

clean · Wafer_clean

0.169	237.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

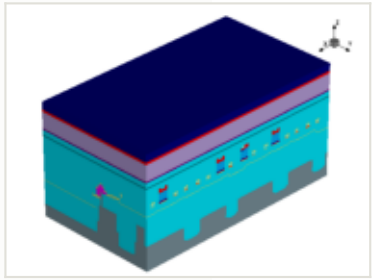

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

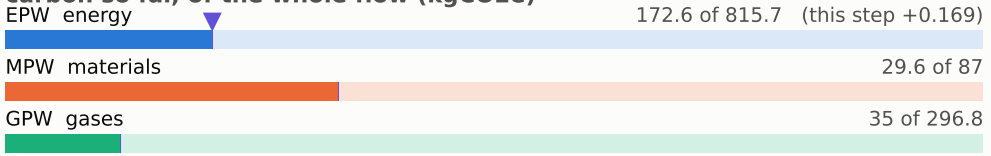

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

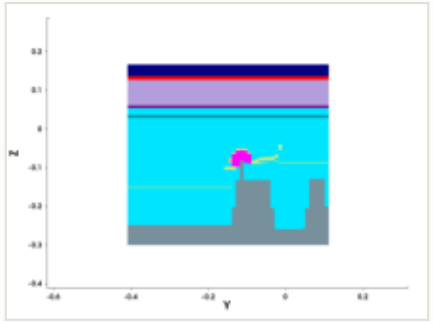

y cut at -0.150 µm

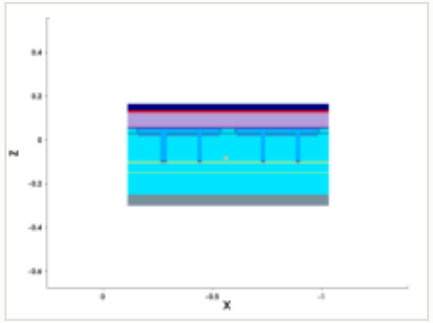

mask for this step

no mask for this step

steps by process area

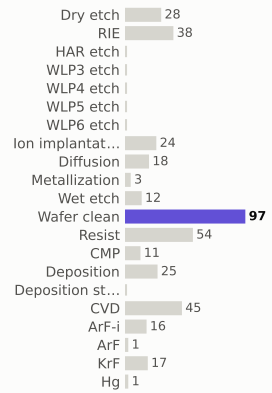

materials deposited (g)

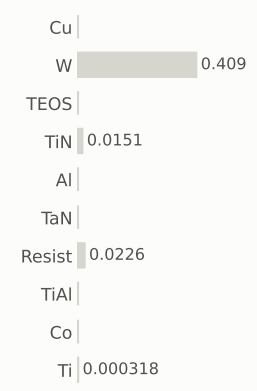

gases emitted (g)

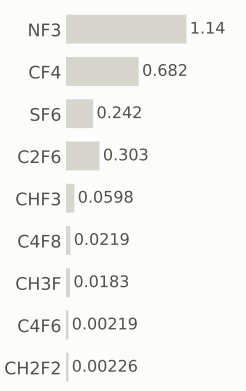

Step #5420: CVD

depo_fill · CVD

1.31	238.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

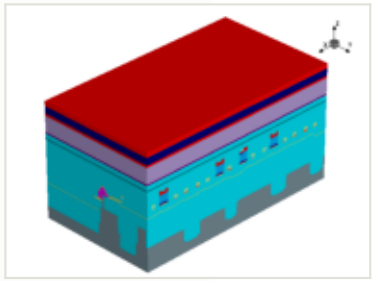

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

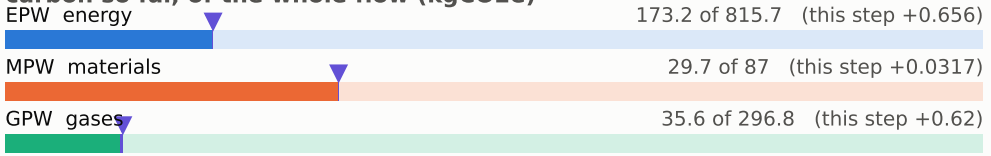

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

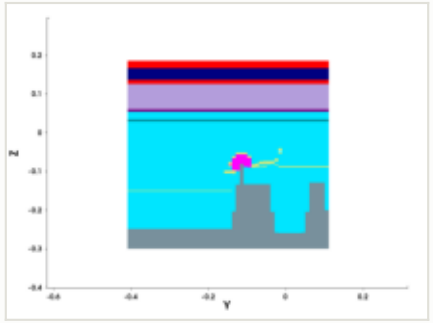

y cut at -0.150 µm

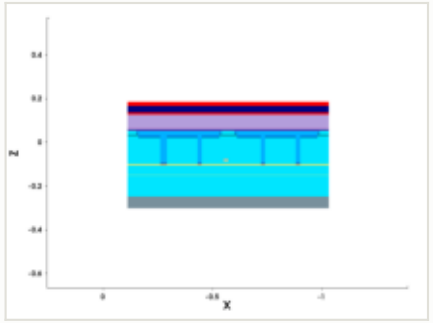

mask for this step

no mask for this step

steps by process area

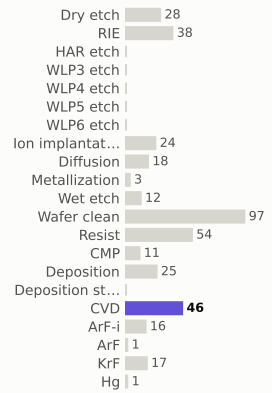

materials deposited (g)

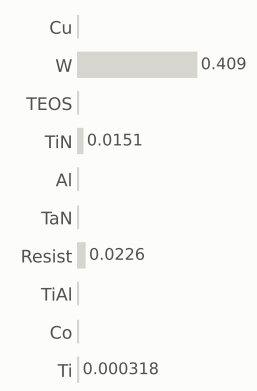

gases emitted (g)

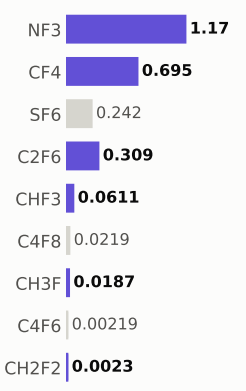

Step #5430: Resist

depo_fill · Resist

0.169	238.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

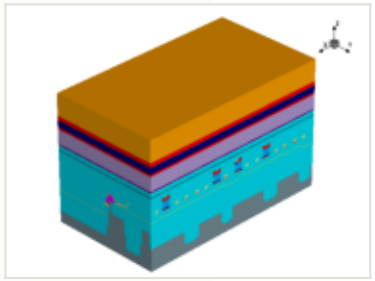

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

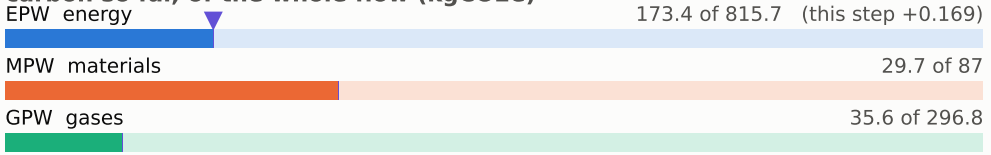

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

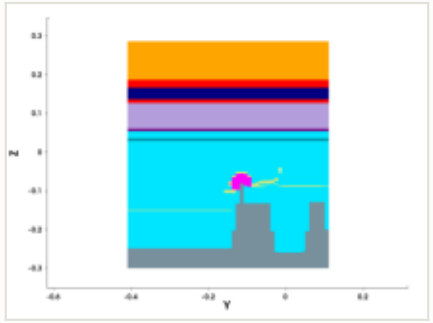

y cut at -0.150 µm

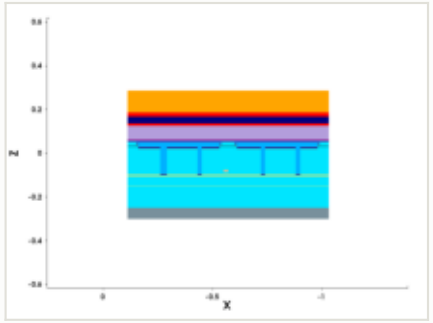

mask for this step

no mask for this step

steps by process area

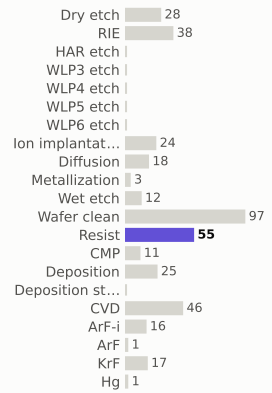

materials deposited (g)

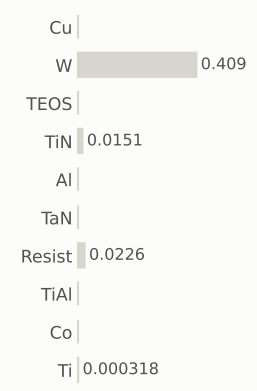

gases emitted (g)

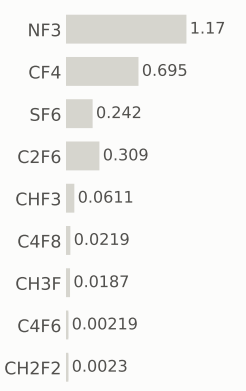

Step #5440: CVD

depo_fill · CVD

1.31	240.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

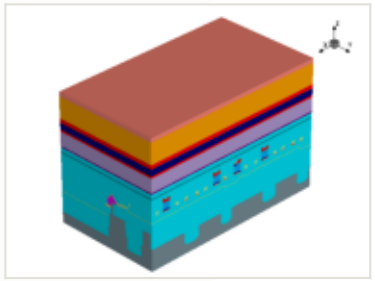

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

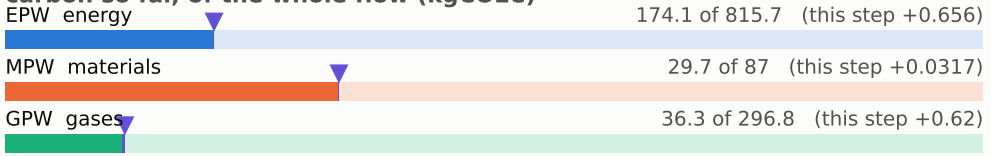

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

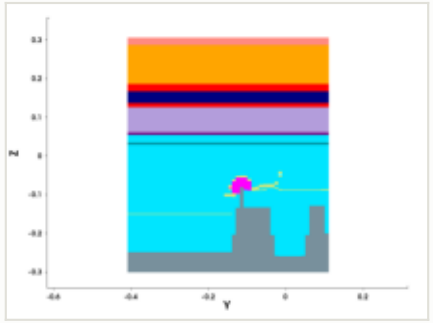

y cut at -0.150 µm

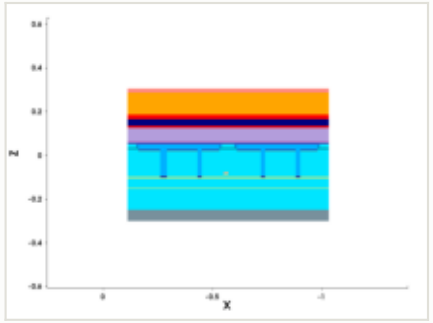

mask for this step

no mask for this step

steps by process area

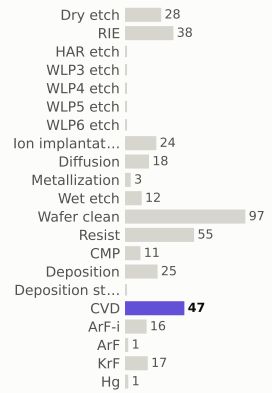

materials deposited (g)

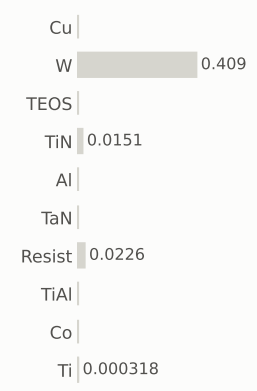

gases emitted (g)

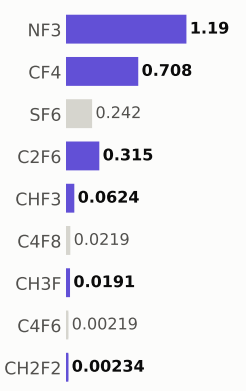

Step #5450: Wafer_clean

clean · Wafer_clean

0.169	240.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

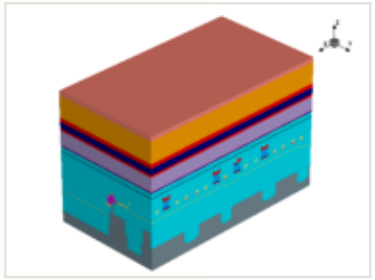

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

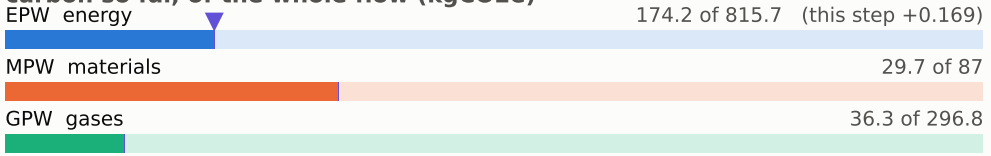

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

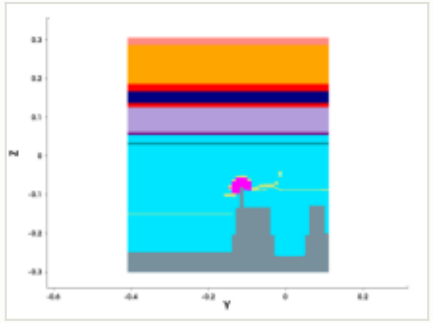

y cut at -0.150 µm

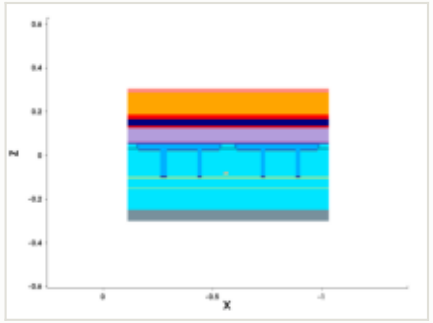

mask for this step

no mask for this step

steps by process area

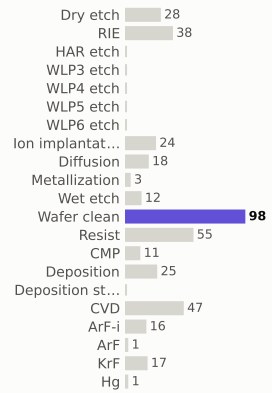

materials deposited (g)

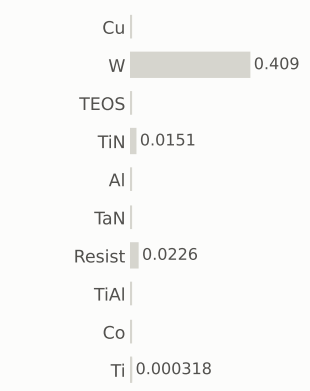

gases emitted (g)

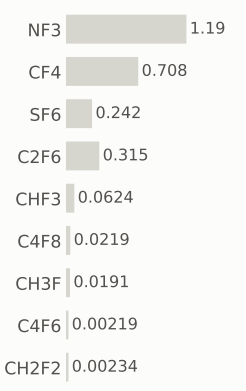

Step #5460: Resist

resist · Resist

0.169	240.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

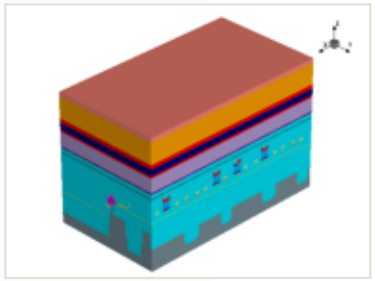

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

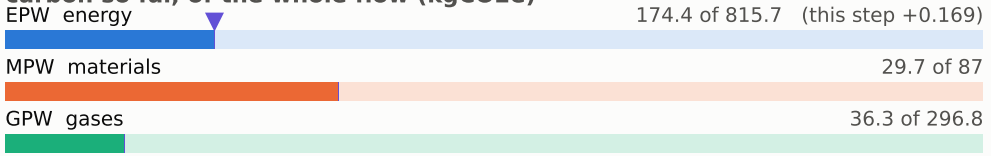

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

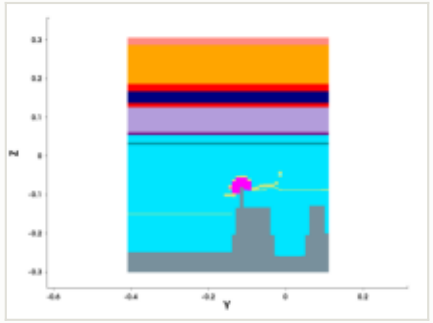

y cut at -0.150 µm

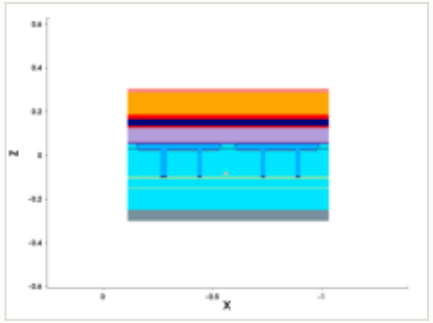

mask for this step

no mask for this step

steps by process area

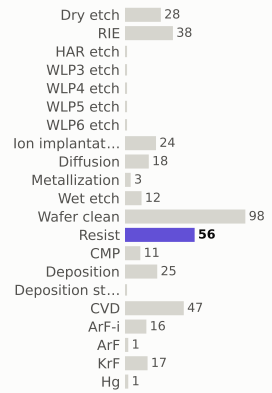

materials deposited (g)

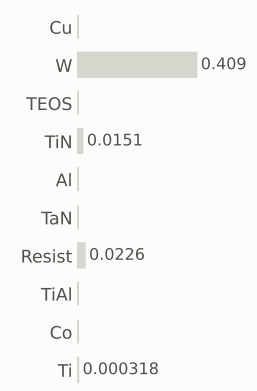

gases emitted (g)

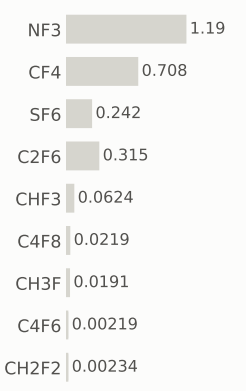

Step #5470: ArF-i

litho_patterning · ArF-i

0.217	240.6	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

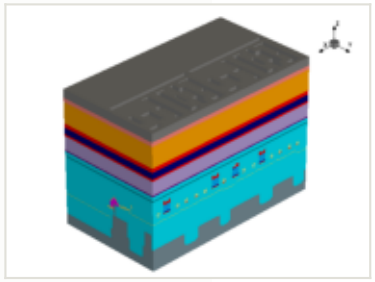

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

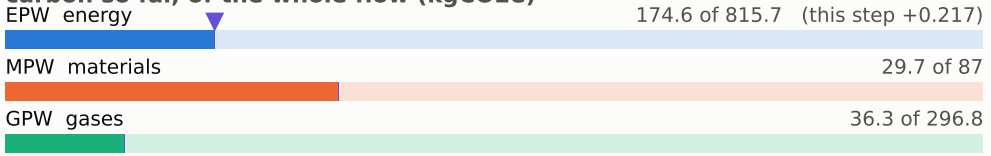

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

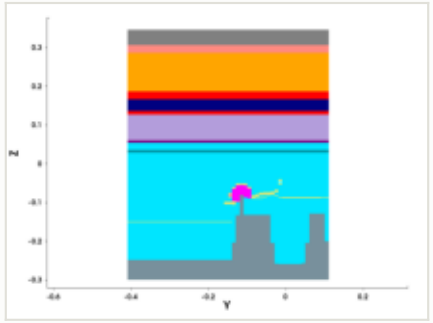

y cut at -0.150 µm

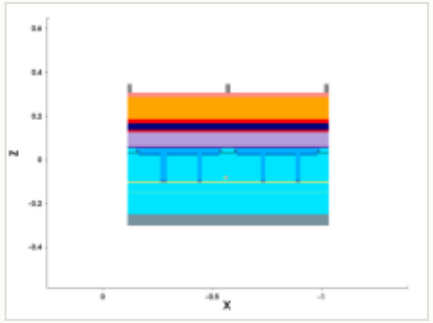

mask: layer 2019:0 (GDSII)

steps by process area

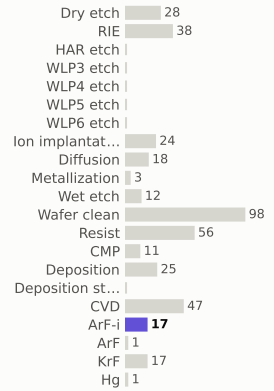

materials deposited (g)

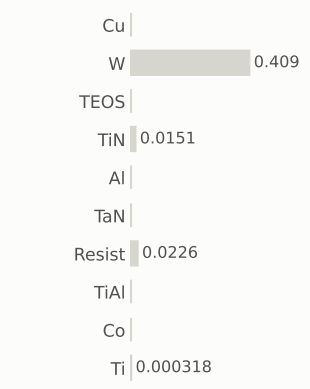

gases emitted (g)

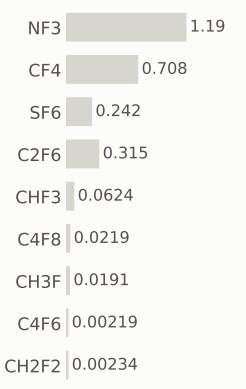

Step #5480: RIE

etch_anisotropic · RIE

1.04	241.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

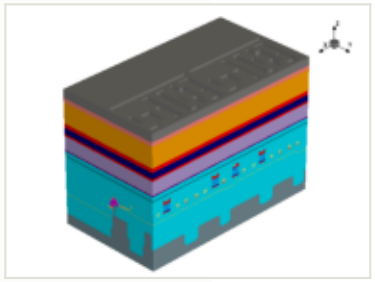

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

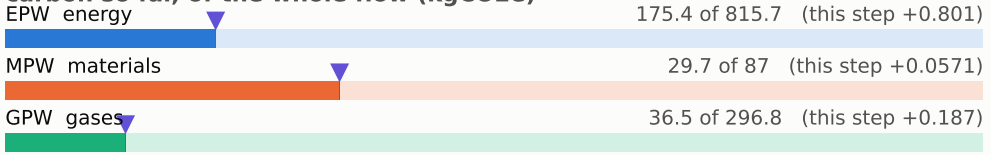

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

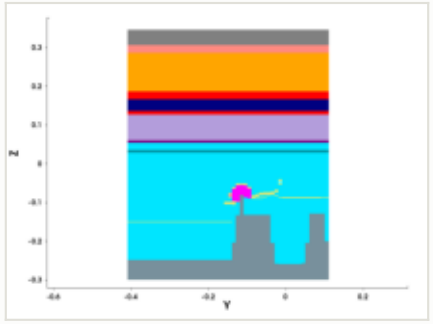

y cut at -0.150 µm

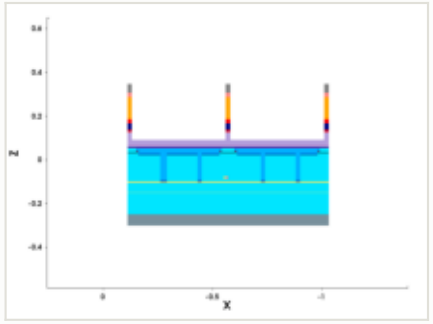

mask for this step

no mask for this step

steps by process area

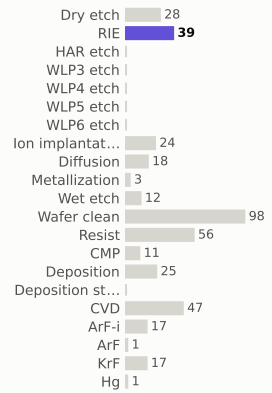

materials deposited (g)

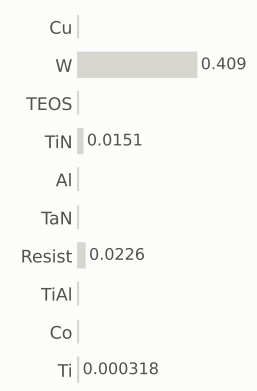

gases emitted (g)

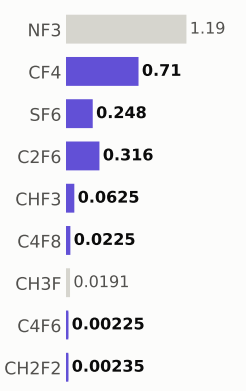

Step #5490: Wafer_clean

clean · Wafer_clean

0.169	241.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

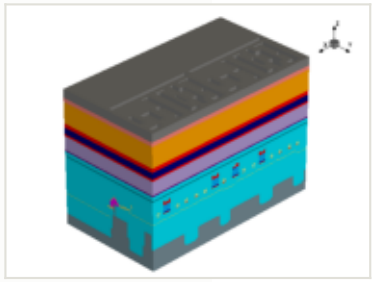

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

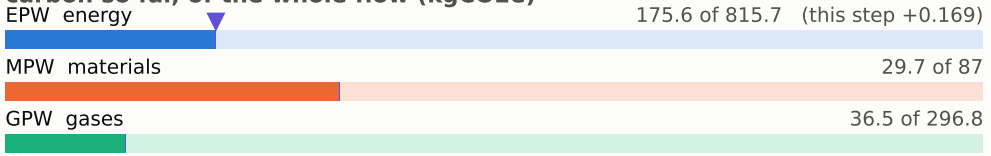

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

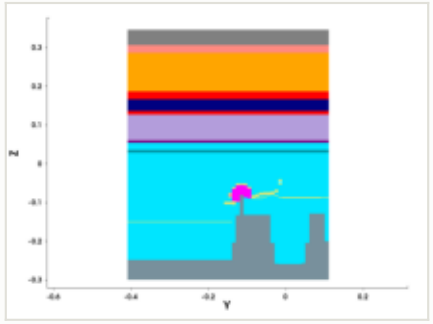

y cut at -0.150 µm

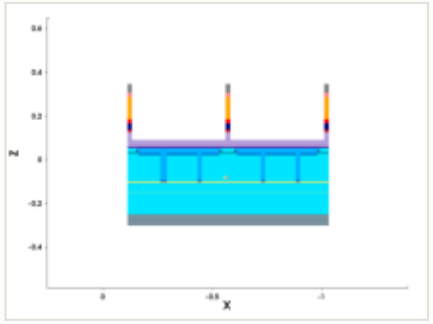

mask for this step

no mask for this step

steps by process area

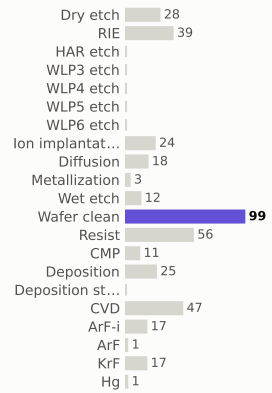

materials deposited (g)

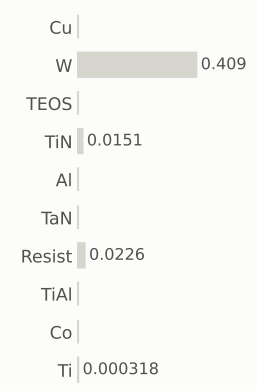

gases emitted (g)

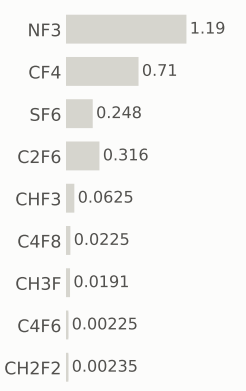

Step #5500: Resist

depo_fill · Resist

0.169	242.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

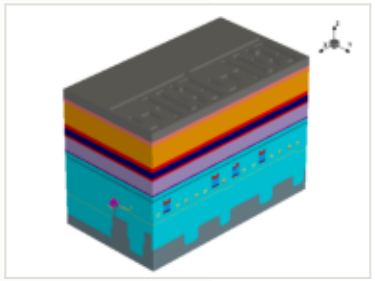

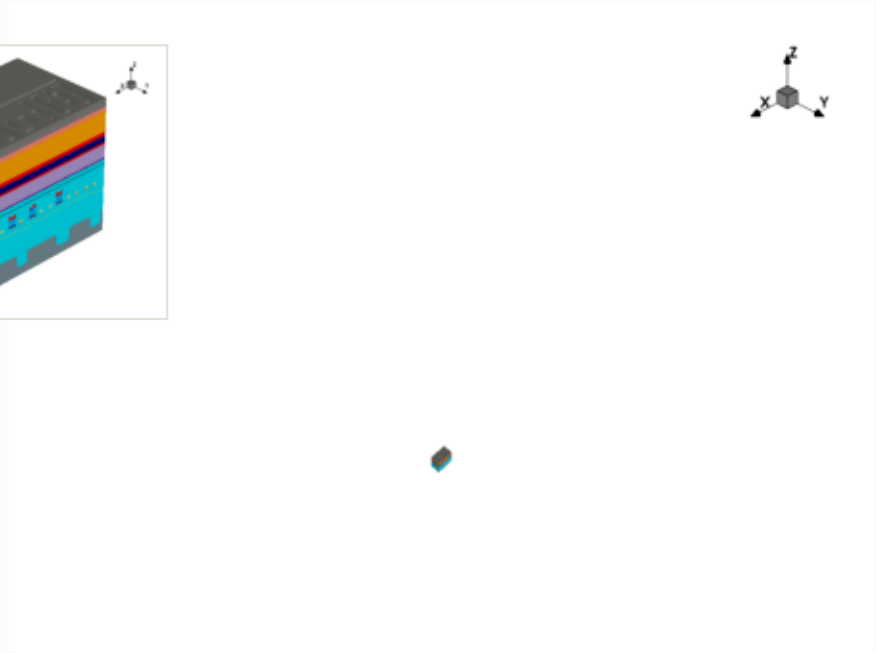

this step

process area	Resist
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

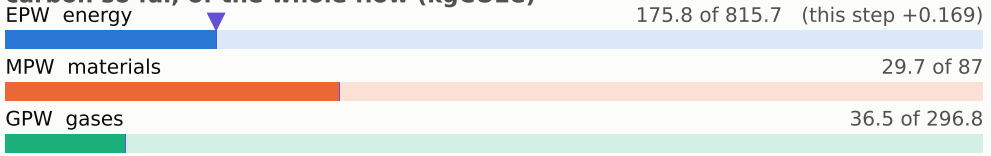

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

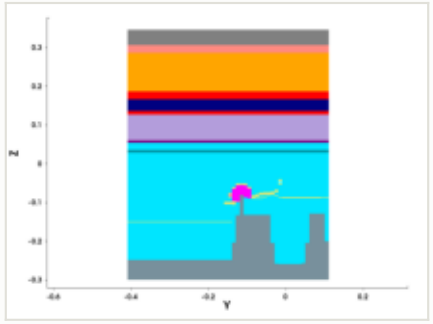

y cut at -0.150 µm

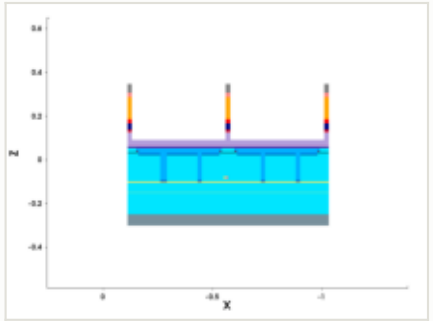

mask for this step

no mask for this step

steps by process area

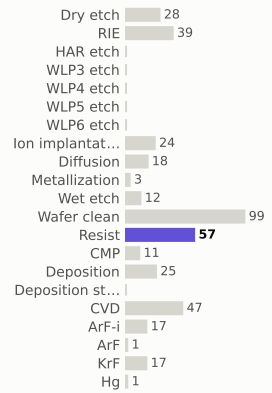

materials deposited (g)

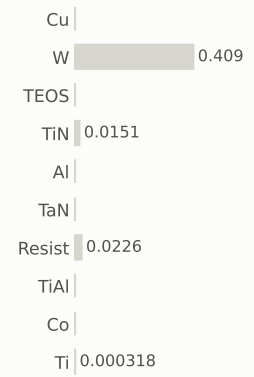

gases emitted (g)

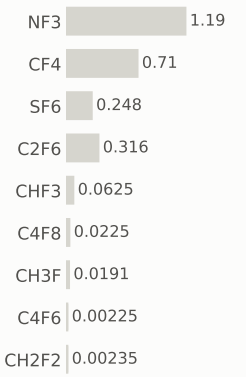

Step #5510: CVD

depo_isotropic · CVD

1.31	243.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

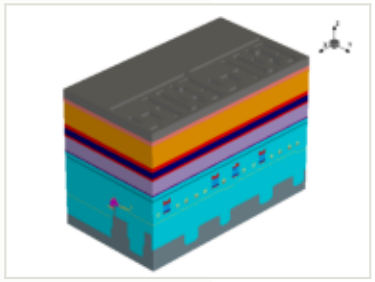

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

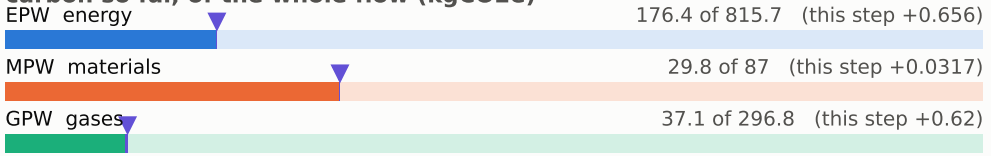

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

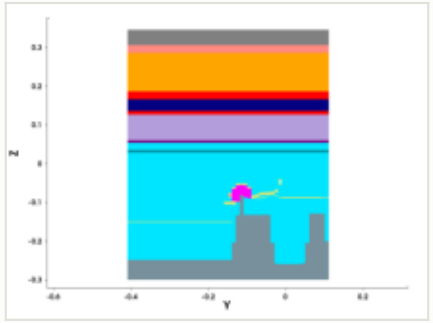

y cut at -0.150 µm

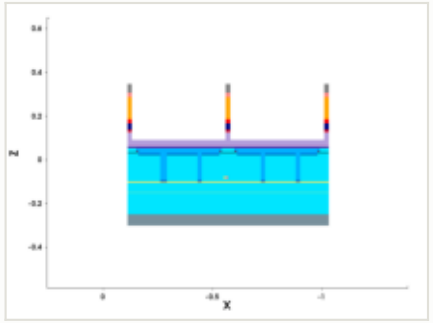

mask for this step

no mask for this step

steps by process area

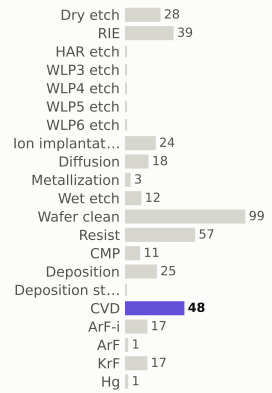

materials deposited (g)

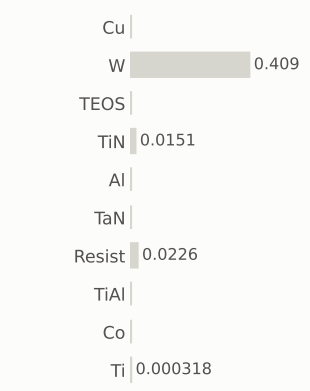

gases emitted (g)

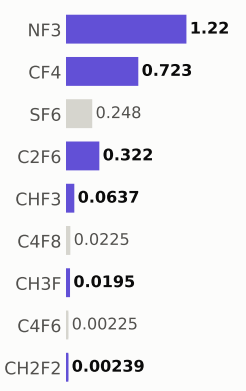

Step #5520: Wafer_clean

clean · Wafer_clean

0.169	243.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

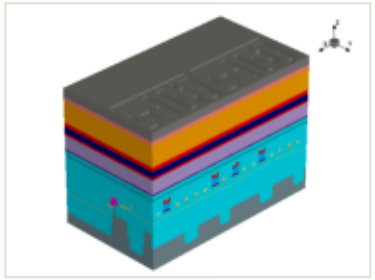

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

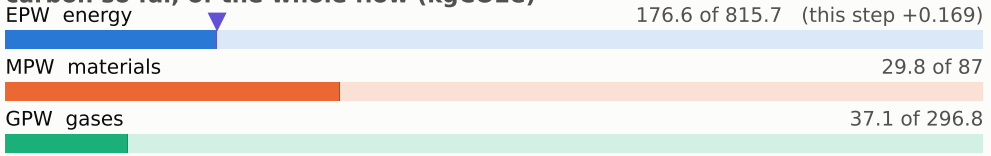

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

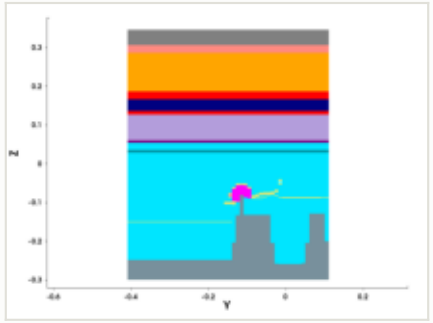

y cut at -0.150 µm

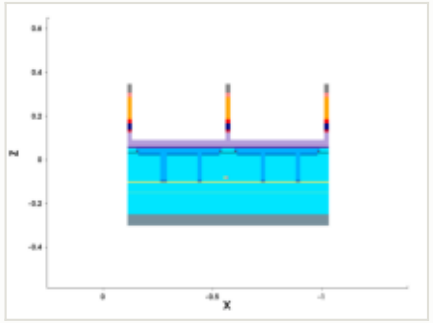

mask for this step

no mask for this step

steps by process area

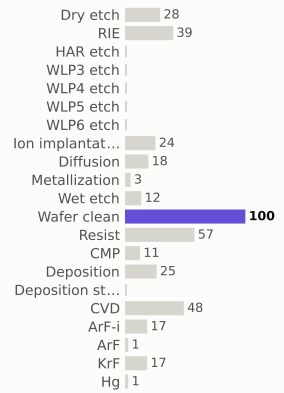

materials deposited (g)

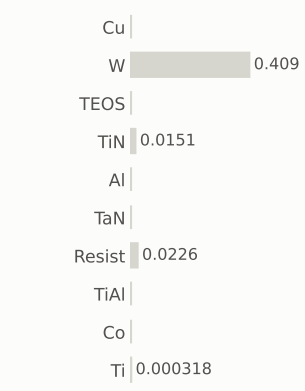

gases emitted (g)

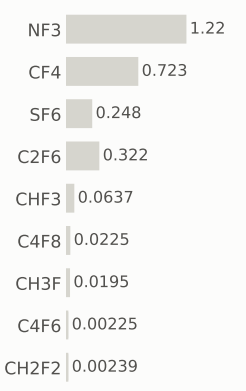

Step #5530: Resist

resist · Resist

0.169	243.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

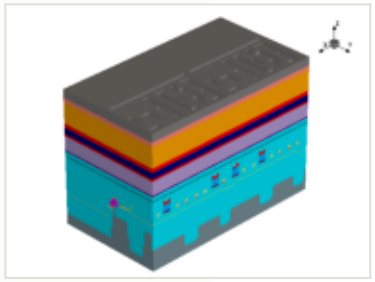

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

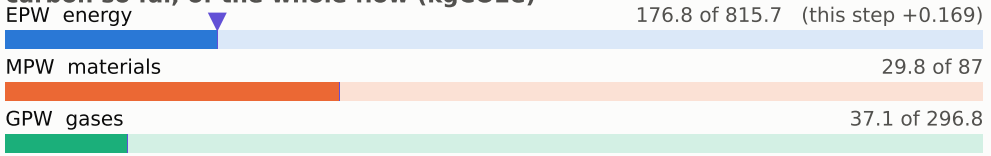

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

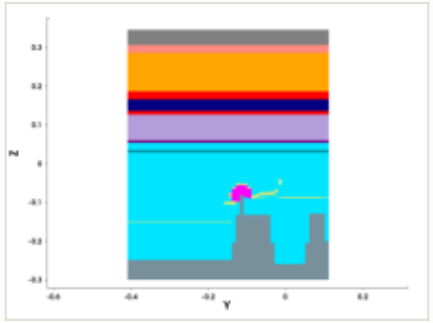

y cut at -0.150 µm

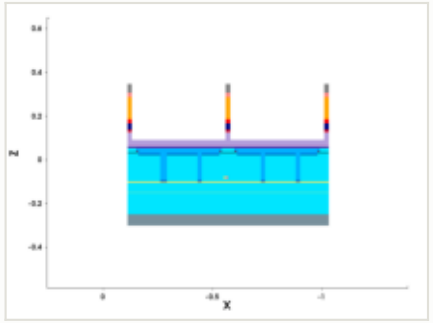

mask for this step

no mask for this step

steps by process area

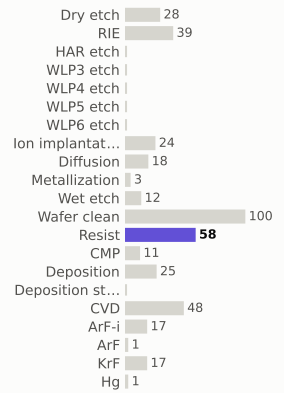

materials deposited (g)

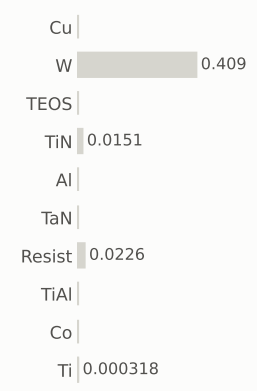

gases emitted (g)

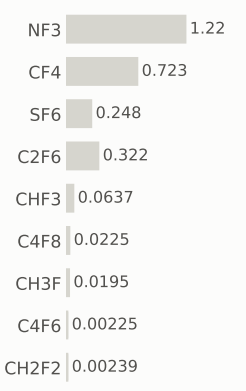

Step #5540: ArF-i

litho_patterning · ArF-i

0.217	243.8	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

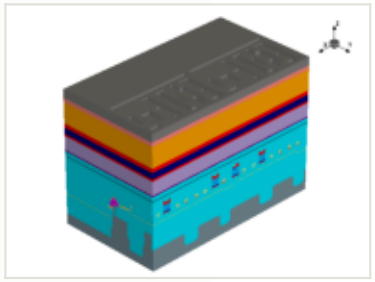

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

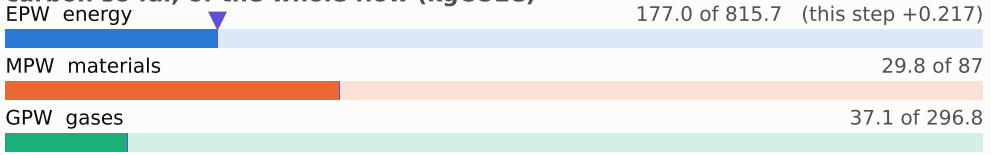

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

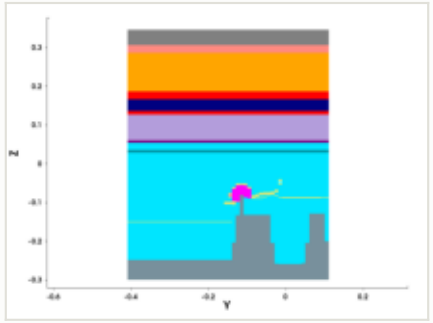

y cut at -0.150 µm

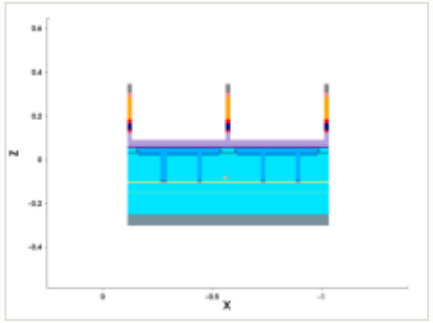

mask: layer 2100:0, positive (GDSII)

steps by process area

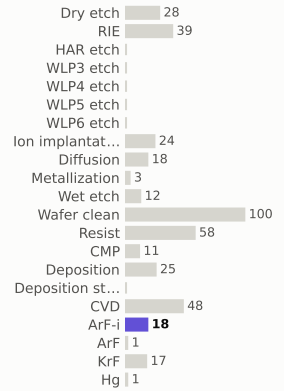

materials deposited (g)

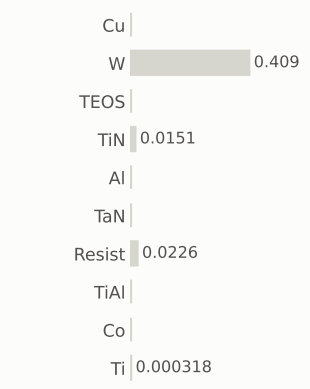

gases emitted (g)

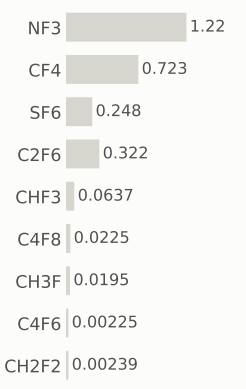

Step #5550: RIE

etch_strip · RIE

1.04	244.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

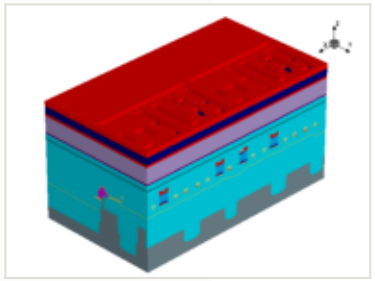

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

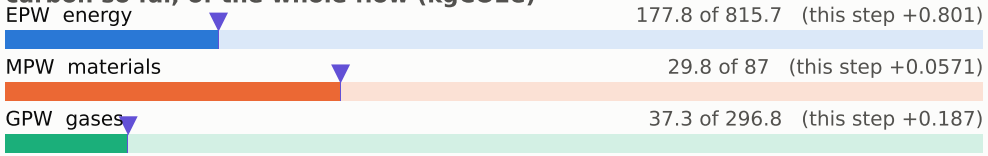

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

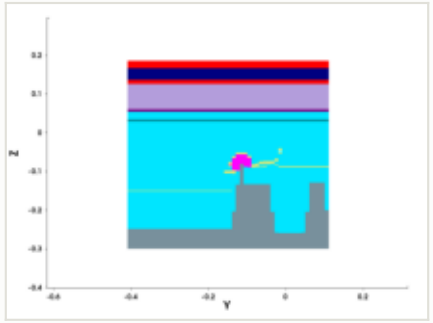

y cut at -0.150 µm

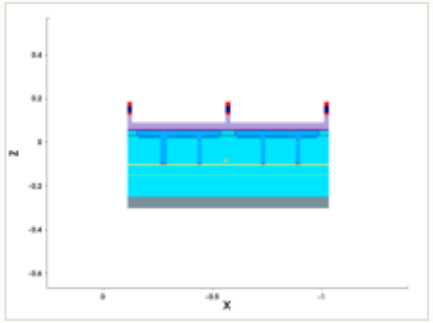

mask for this step

no mask for this step

steps by process area

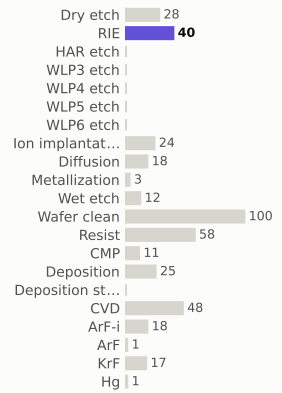

materials deposited (g)

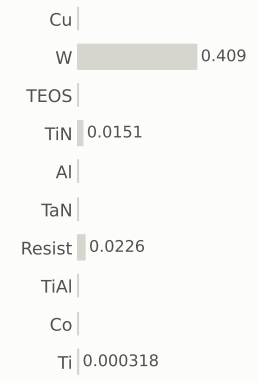

gases emitted (g)

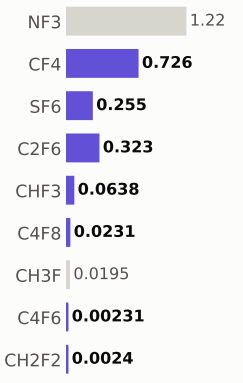

Step #5560: Wafer_clean

clean · Wafer_clean

0.169	245.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

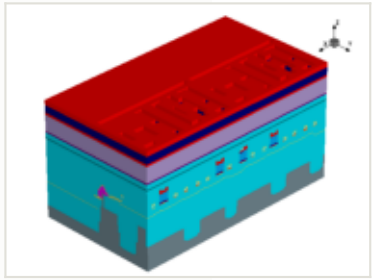

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

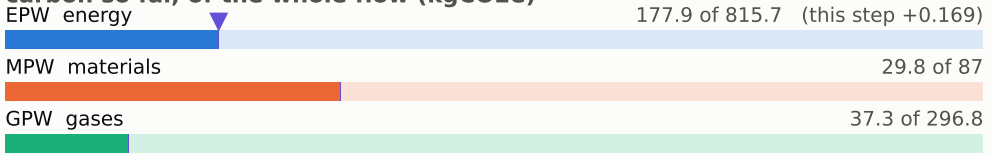

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

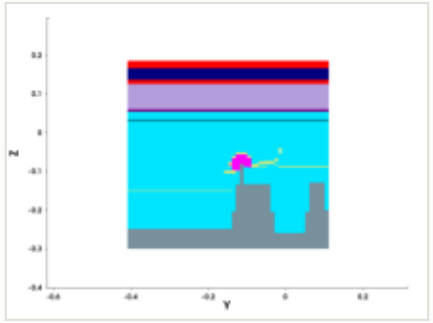

y cut at -0.150 µm

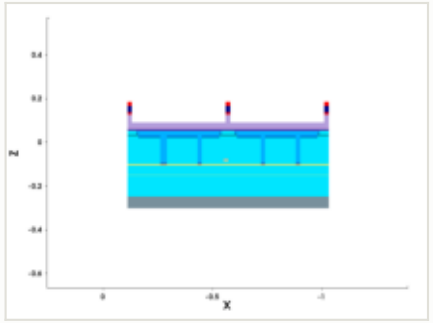

mask for this step

no mask for this step

steps by process area

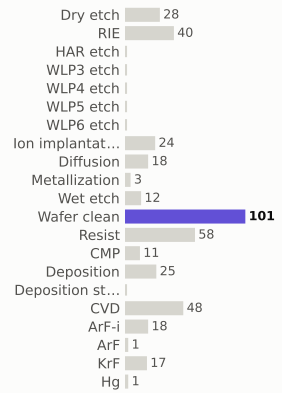

materials deposited (g)

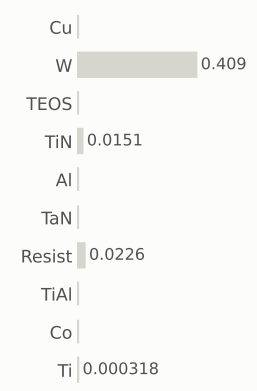

gases emitted (g)

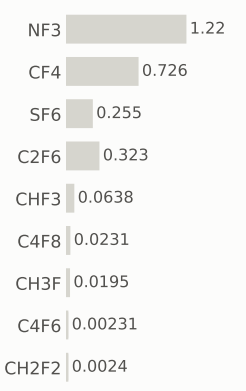

Step #5570: Resist

depo_fill · Resist

0.169	245.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

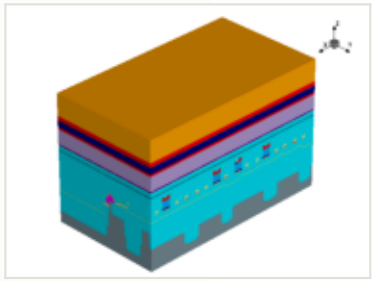

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

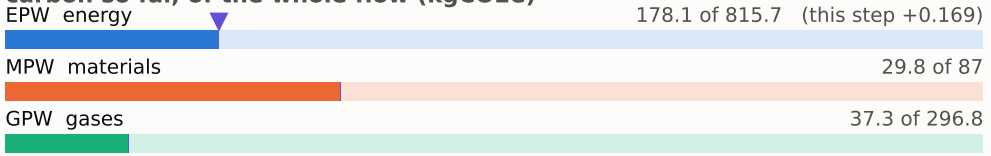

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

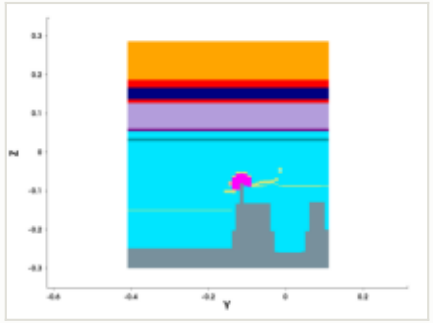

y cut at -0.150 µm

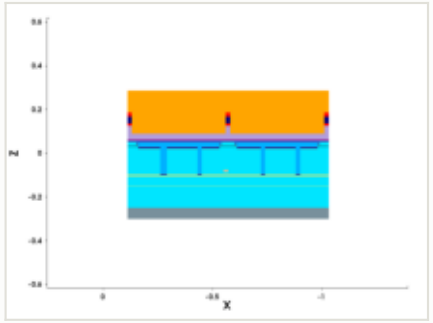

mask for this step

no mask for this step

steps by process area

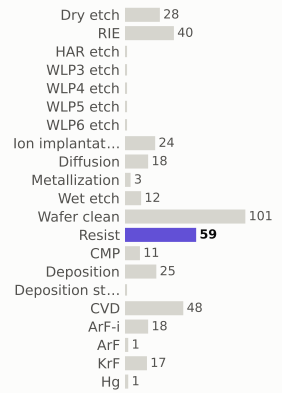

materials deposited (g)

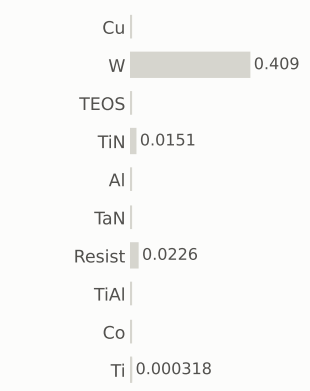

gases emitted (g)

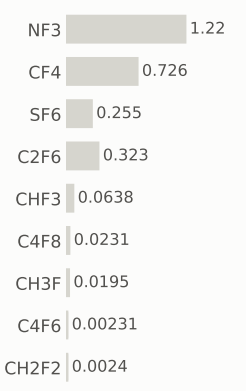

Step #5580: CVD

depo_fill · CVD

1.31	246.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

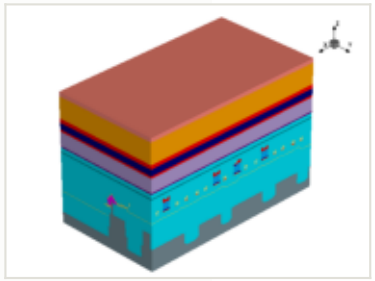

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

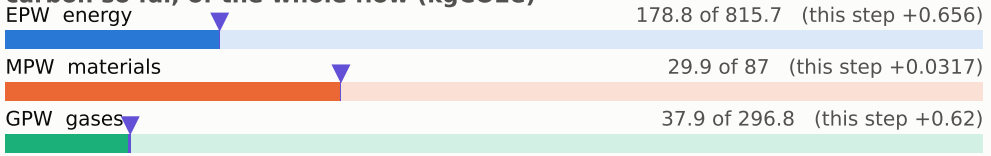

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

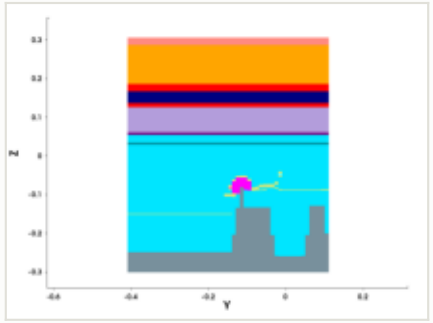

y cut at -0.150 µm

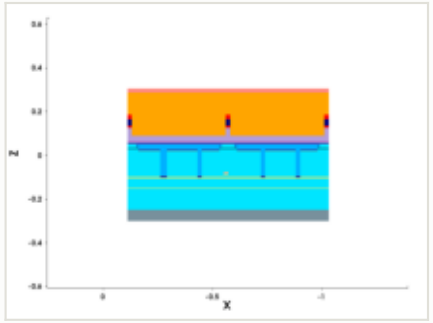

mask for this step

no mask for this step

steps by process area

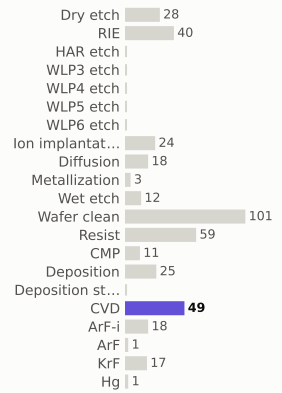

materials deposited (g)

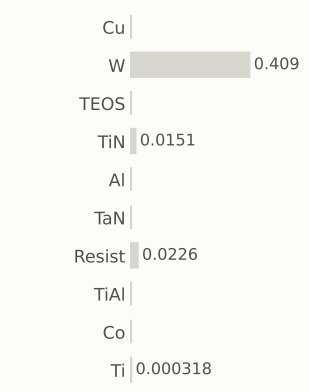

gases emitted (g)

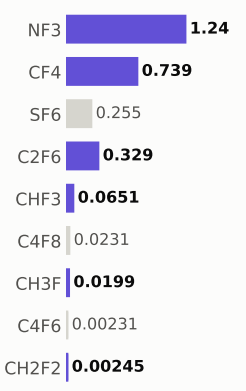

Step #5590: Wafer_clean

clean · Wafer_clean

0.169	246.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

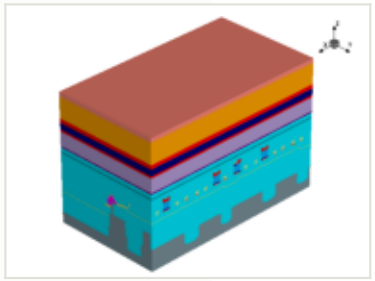

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

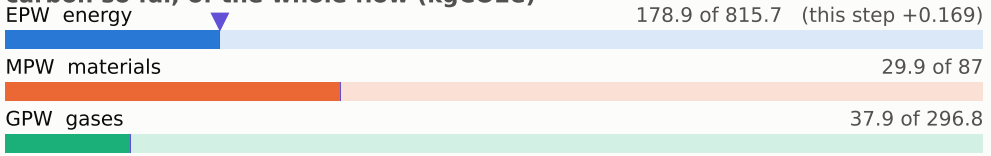

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

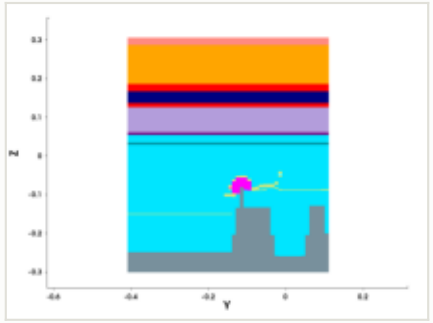

y cut at -0.150 µm

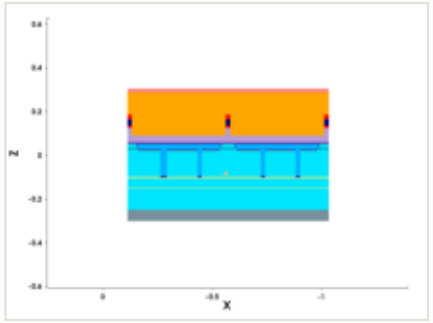

mask for this step

no mask for this step

steps by process area

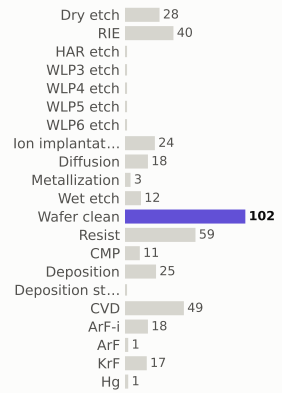

materials deposited (g)

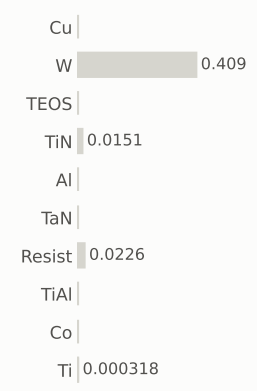

gases emitted (g)

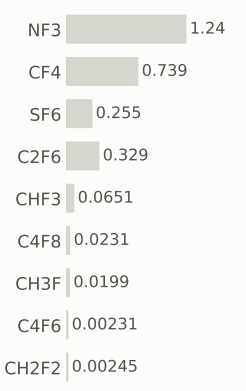

Step #5600: Resist

resist · Resist

0.169	246.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

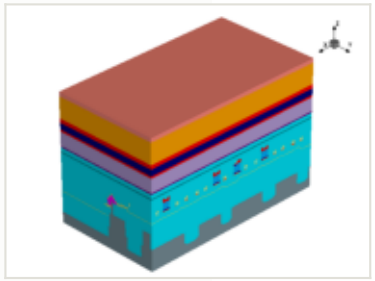

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

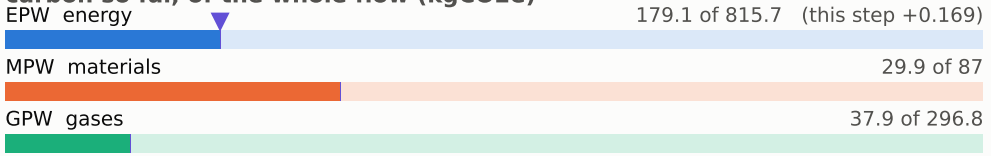

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

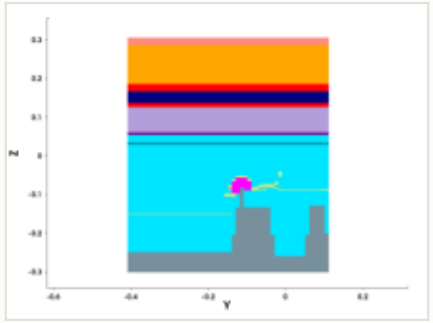

y cut at -0.150 µm

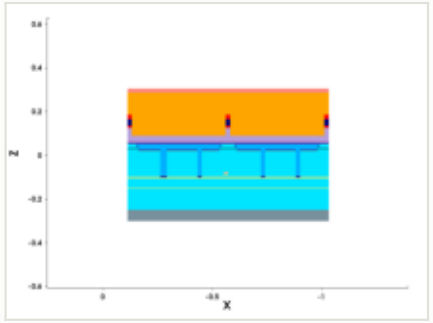

mask for this step

no mask for this step

steps by process area

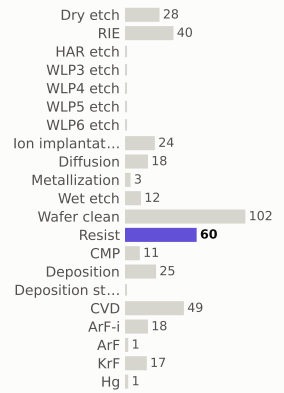

materials deposited (g)

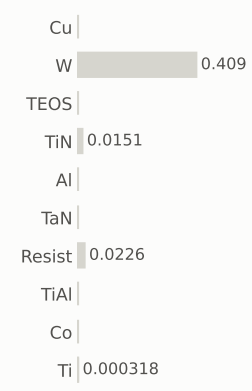

gases emitted (g)

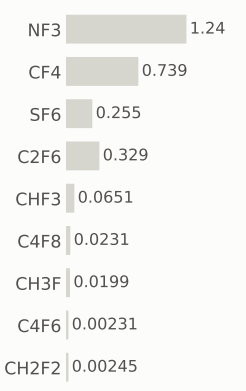

Step #5610: ArF-i

litho_patterning · ArF-i

0.217	247.1	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

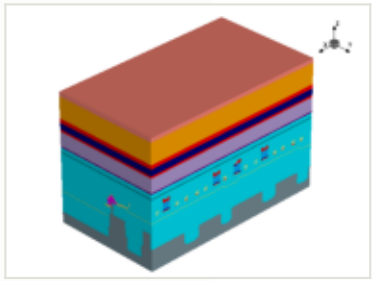

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

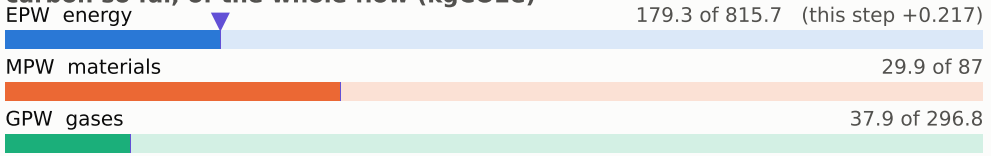

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

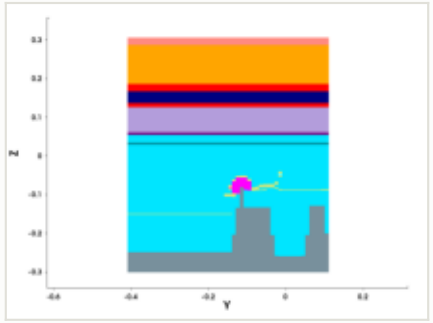

y cut at -0.150 µm

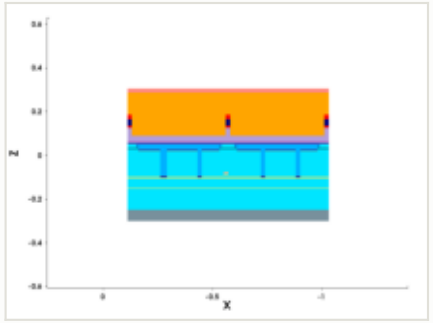

mask: layer 2100:0, positive (GDSII)

steps by process area

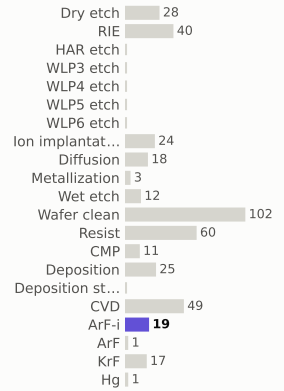

materials deposited (g)

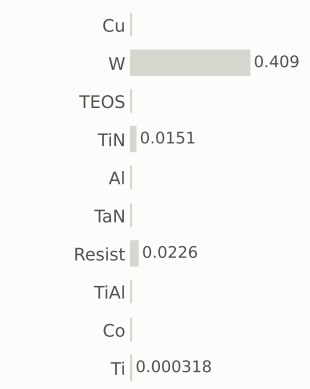

gases emitted (g)

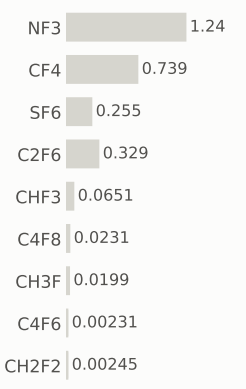

Step #5620: RIE

etch_anisotropic · RIE

1.04	248.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

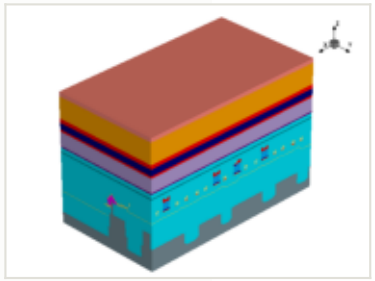

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

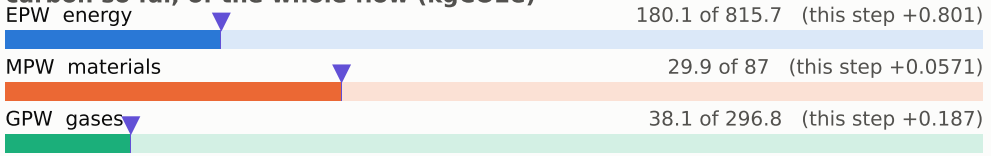

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

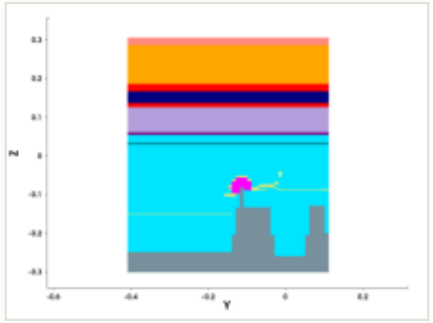

y cut at -0.150 µm

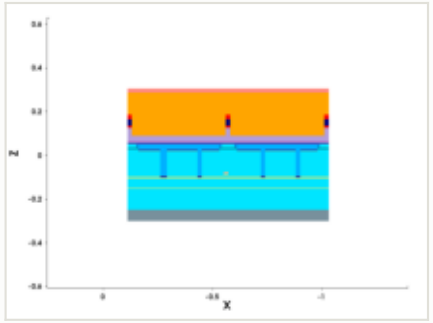

mask for this step

no mask for this step

steps by process area

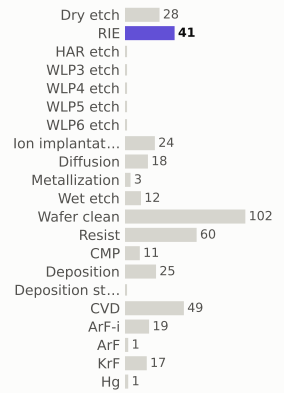

materials deposited (g)

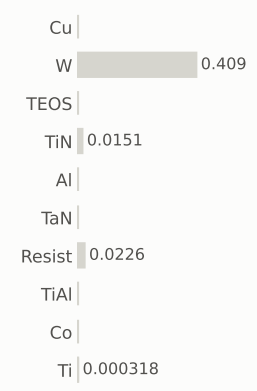

gases emitted (g)

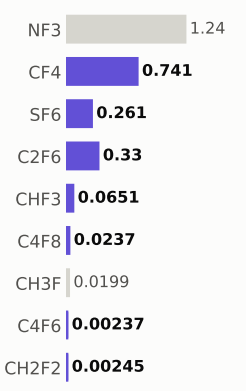

Step #5630: Wafer_clean

clean · Wafer_clean

0.169	248.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

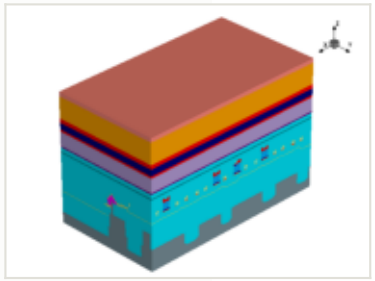

x cut at -0.570 µm

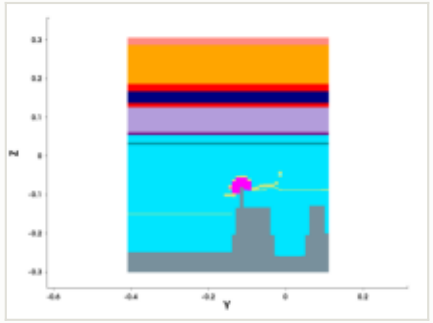

y cut at -0.150 µm

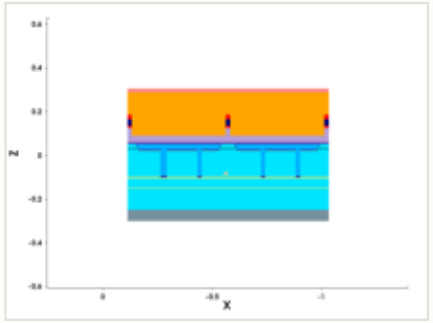

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

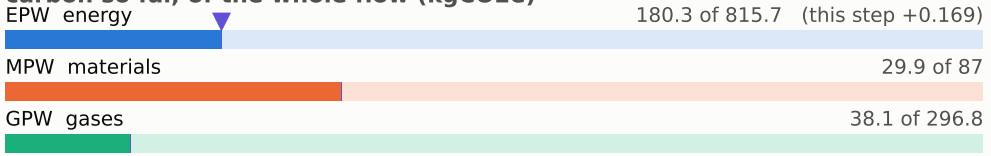

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

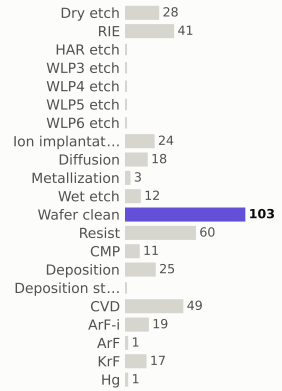

materials deposited (g)



gases emitted (g)

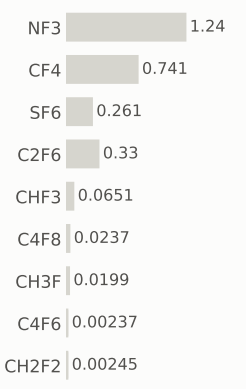

Step #5640: Resist

depo_fill · Resist

0.169	248.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

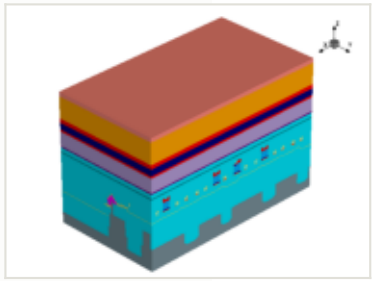

this step

process area	Resist
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

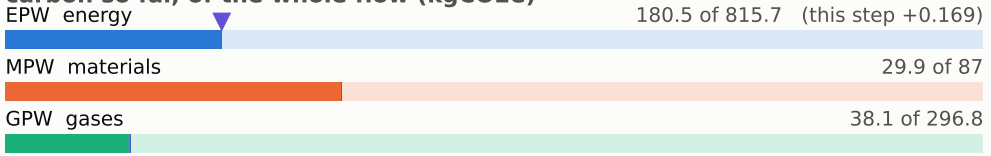

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

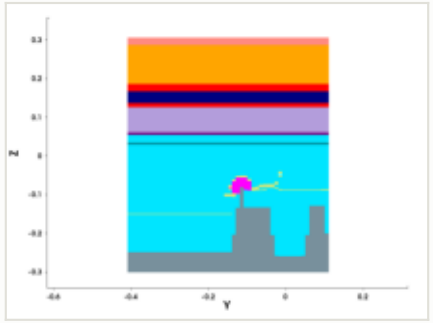

y cut at -0.150 µm

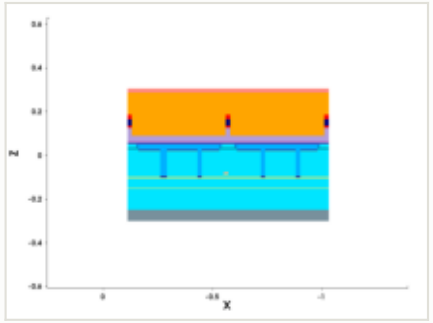

mask for this step

no mask for this step

steps by process area

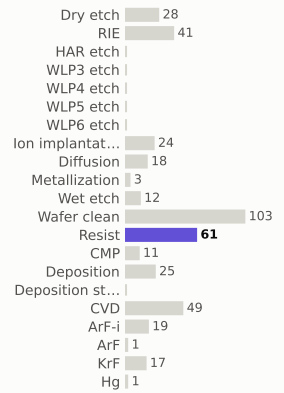

materials deposited (g)

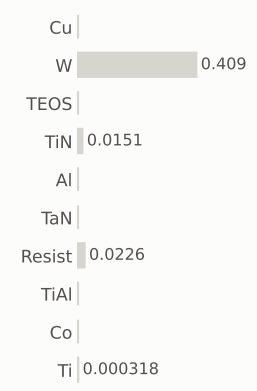

gases emitted (g)

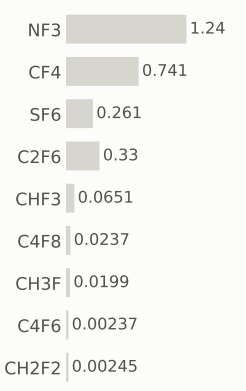

Step #5650: Deposition

depo_isotropic · Deposition

0.656	249.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

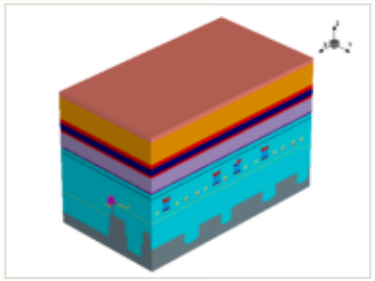

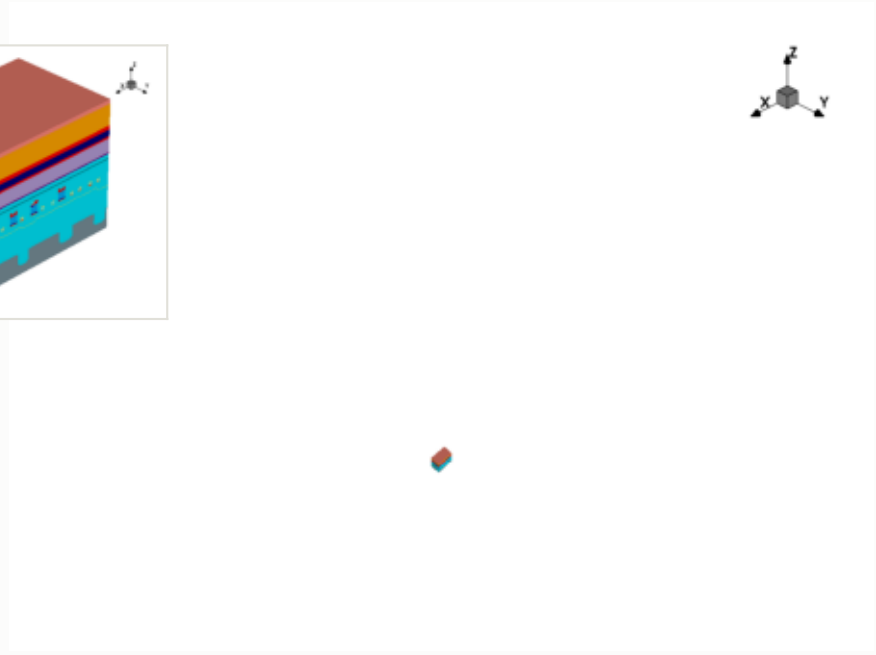

this step

process area	Deposition
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

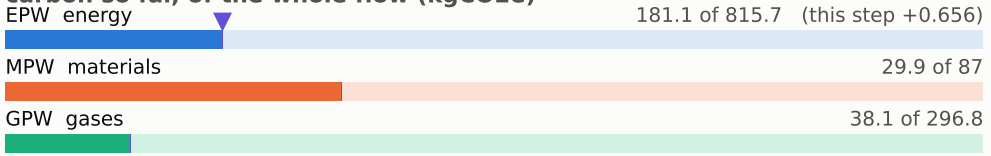

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

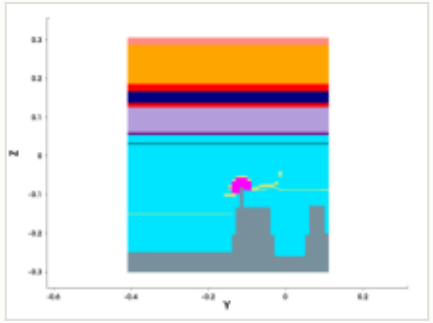

y cut at -0.150 µm

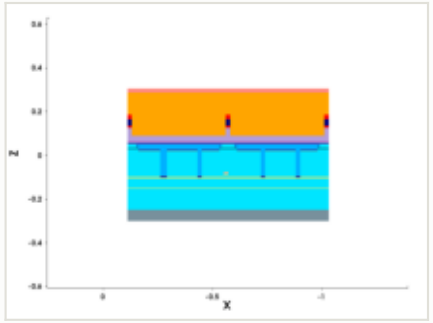

mask for this step

no mask for this step

steps by process area

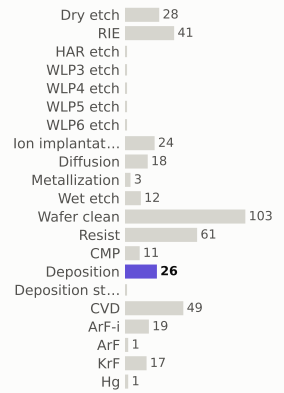

materials deposited (g)

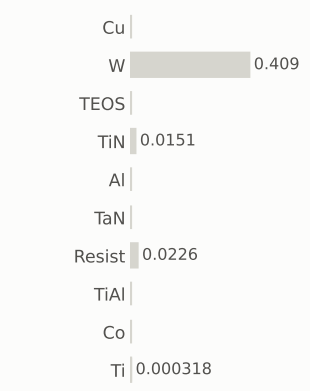

gases emitted (g)

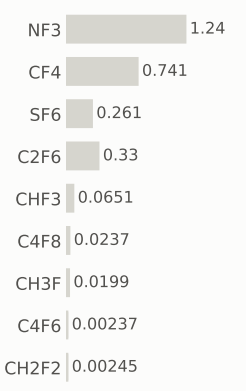

Step #5660: CVD

depo_isotropic · CVD

1.31	250.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

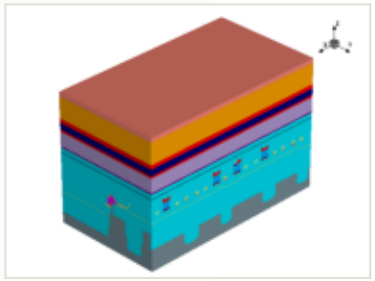

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

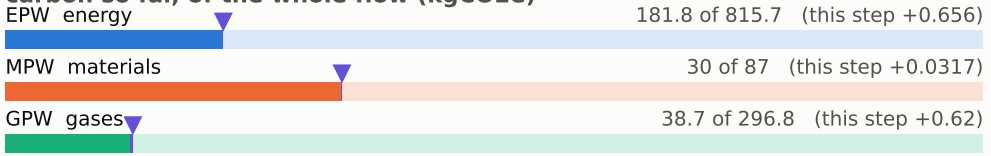

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

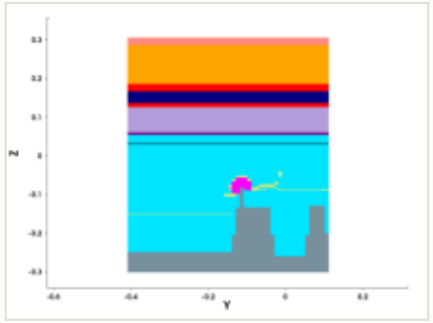

y cut at -0.150 µm

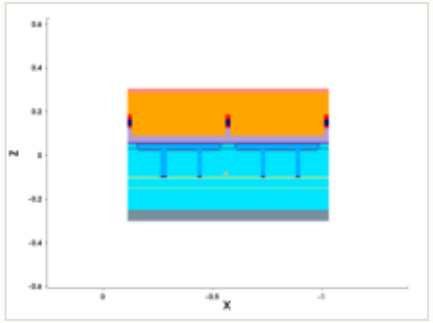

mask for this step

no mask for this step

steps by process area

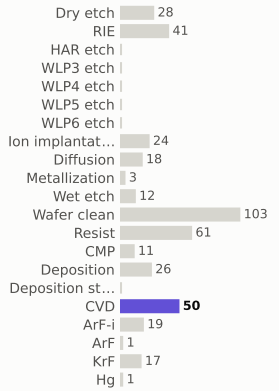

materials deposited (g)

gases emitted (g)

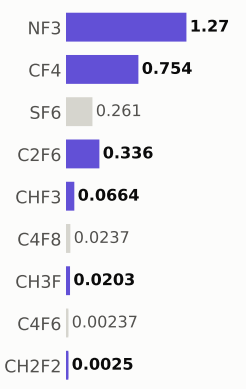

Step #5670: Resist

depo_fill · Resist

0.169	250.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

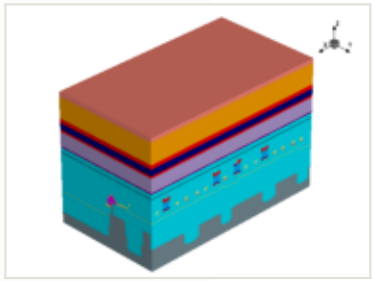

this step

process area	Resist
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

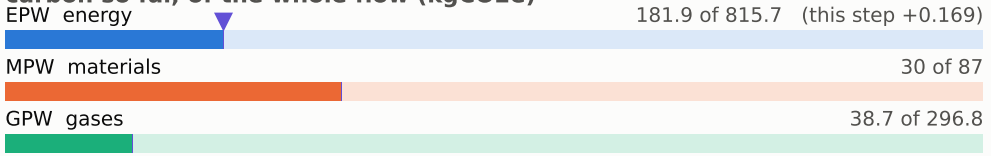

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

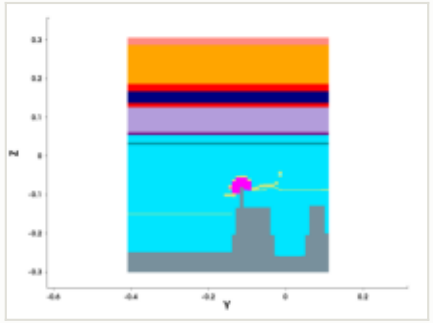

y cut at -0.150 µm

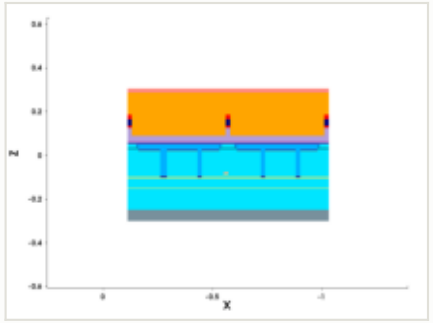

mask for this step

no mask for this step

steps by process area

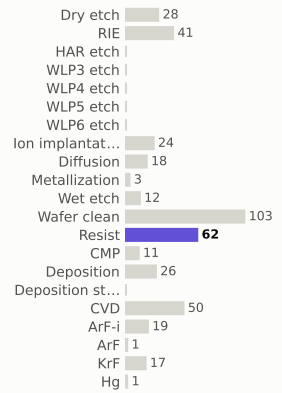

materials deposited (g)

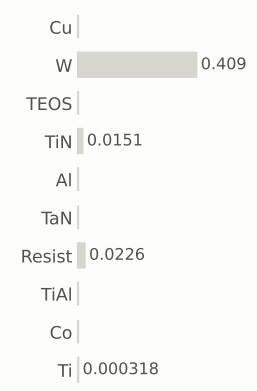

gases emitted (g)

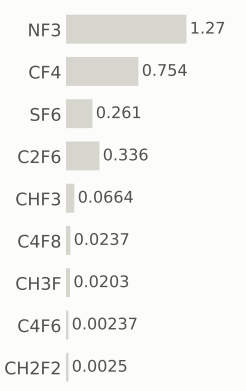

Step #5680: CVD

depo_isotropic · CVD

1.31	251.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

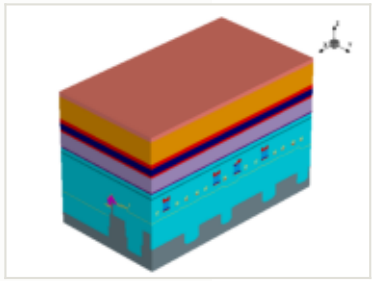

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

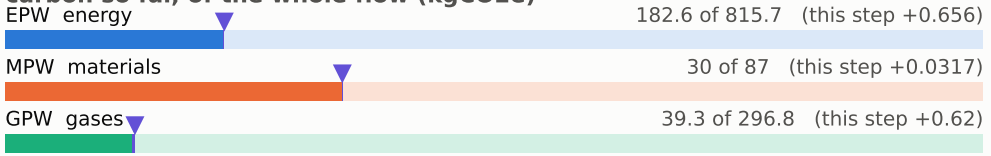

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

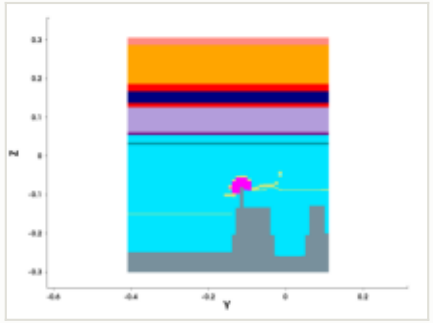

y cut at -0.150 µm

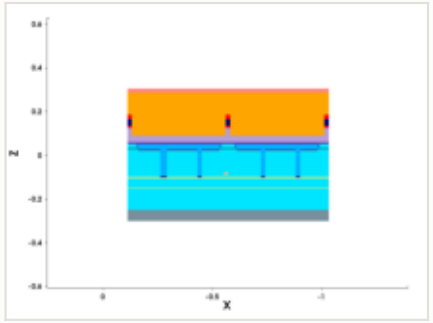

mask for this step

no mask for this step

steps by process area

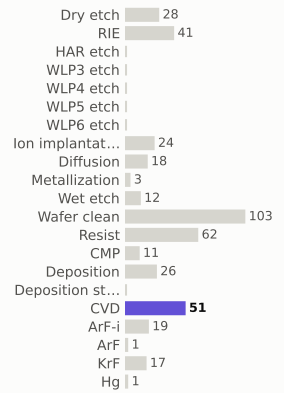

materials deposited (g)

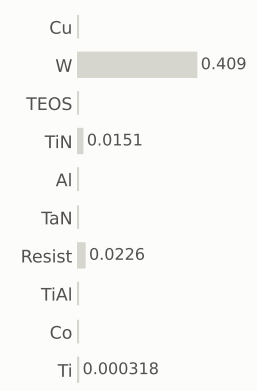

gases emitted (g)

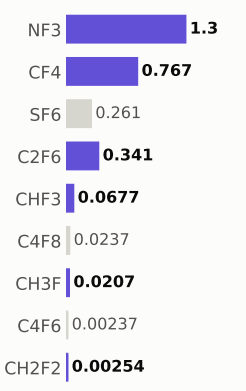

Step #5690: Wafer_clean

clean · Wafer_clean

0.169	252.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

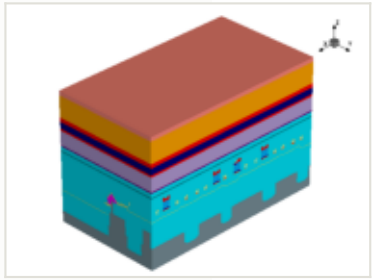

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

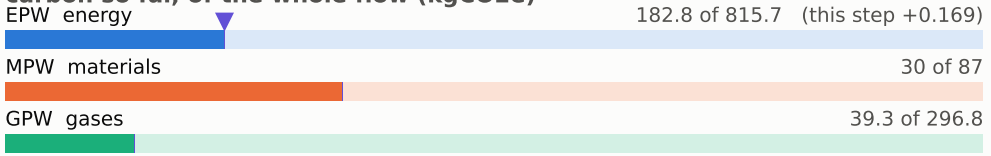

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

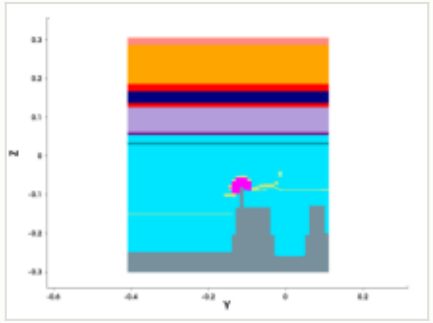

y cut at -0.150 µm

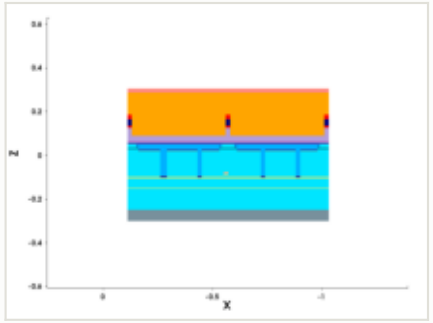

mask for this step

no mask for this step

steps by process area

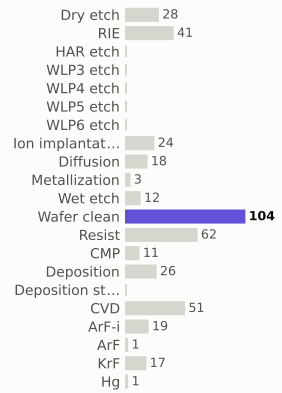

materials deposited (g)

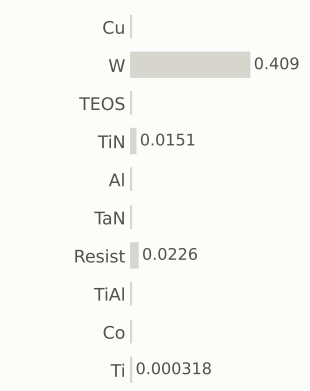

gases emitted (g)

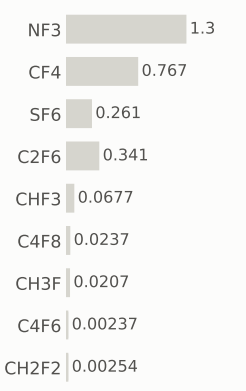

Step #5700: Resist

resist · Resist

0.169	252.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

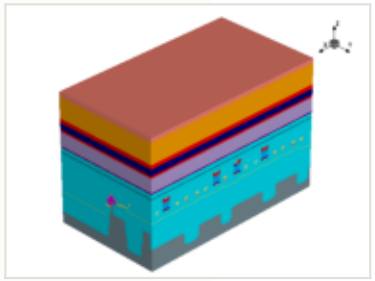

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

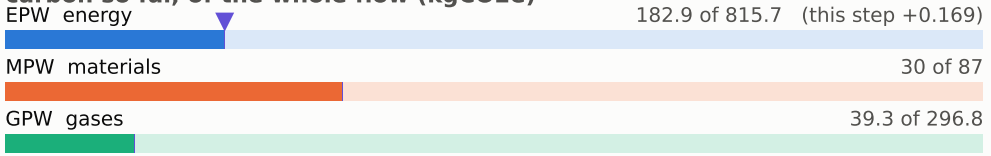

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

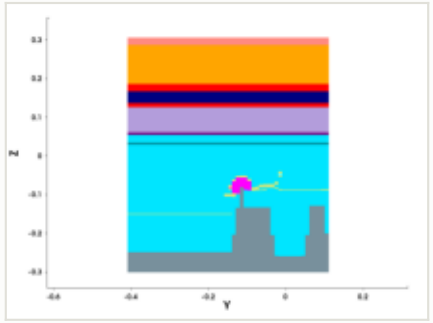

y cut at -0.150 µm

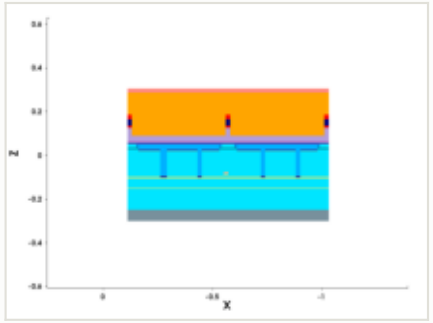

mask for this step

no mask for this step

steps by process area

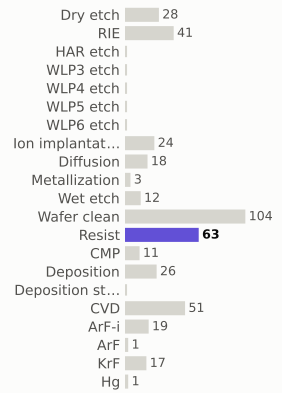

materials deposited (g)

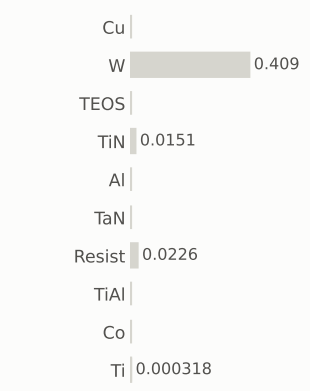

gases emitted (g)

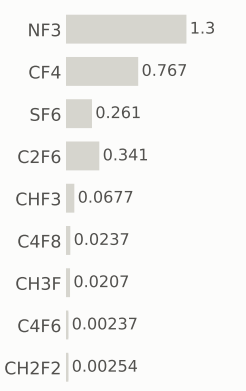

Step #5710: ArF-i

litho_patterning · ArF-i

0.217	252.4	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

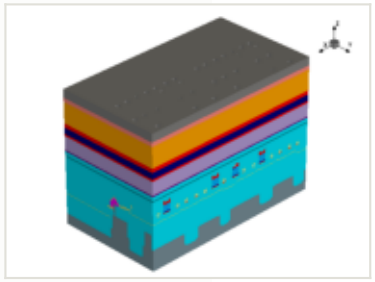

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

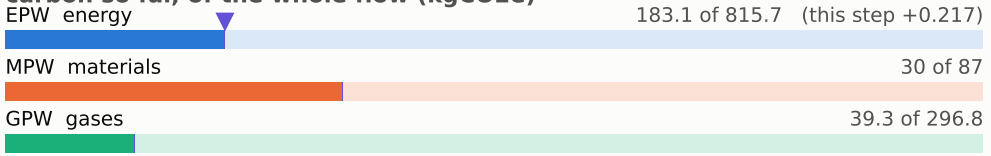

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

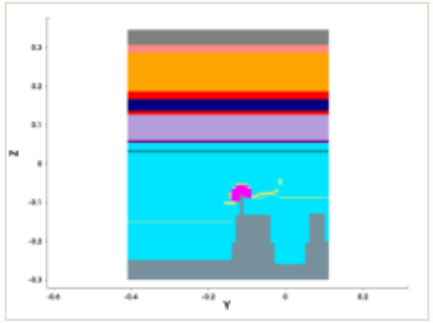

y cut at -0.150 µm

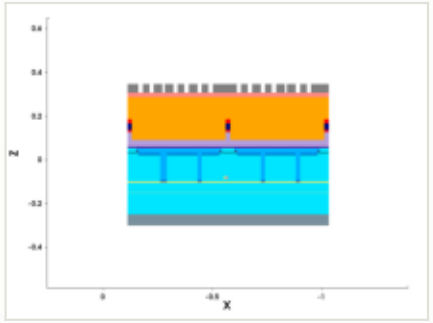

mask: layer 2018:0 (GDSII)



steps by process area

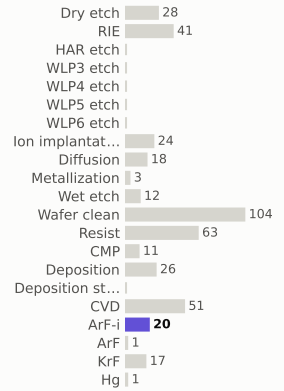

materials deposited (g)

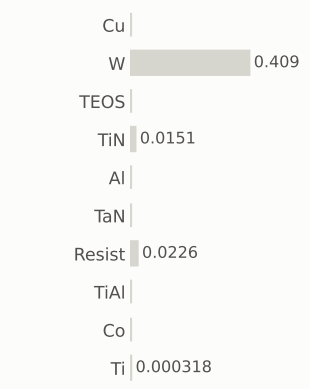

gases emitted (g)

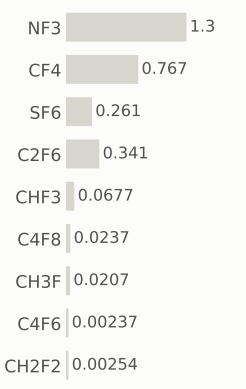

Step #5720: RIE

etch_anisotropic · RIE

1.04	253.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

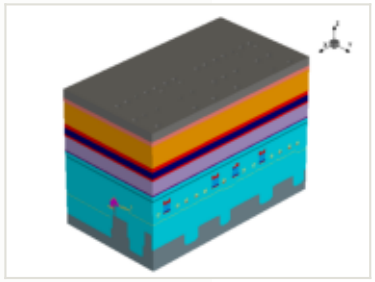

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

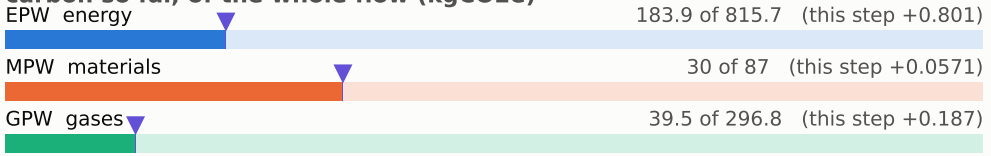

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

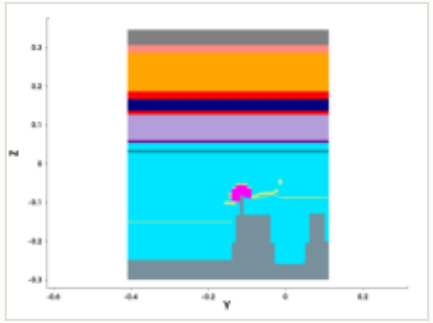

y cut at -0.150 µm

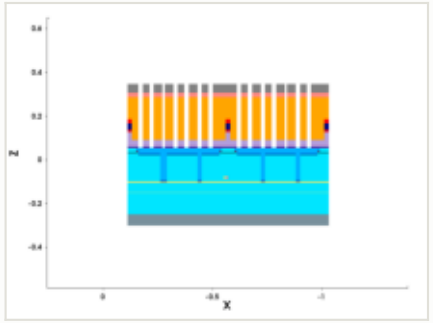

mask for this step

no mask for this step

steps by process area

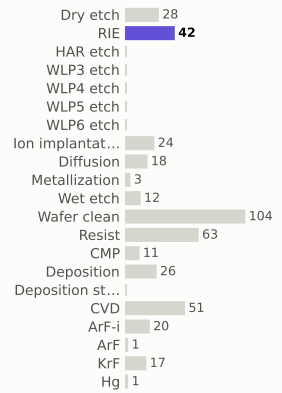

materials deposited (g)

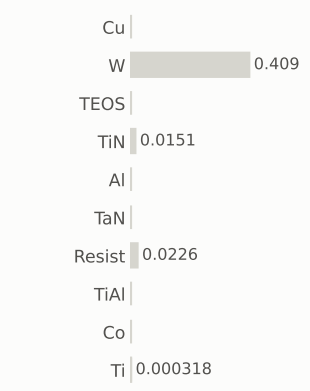

gases emitted (g)

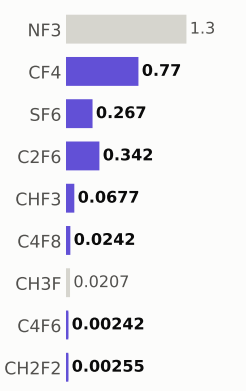

Step #5730: Wafer_clean

clean · Wafer_clean

0.169	253.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

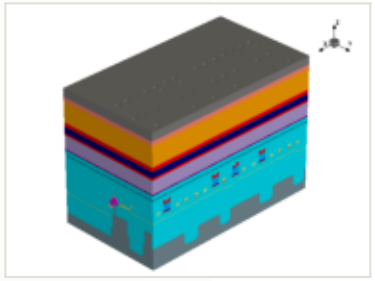

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

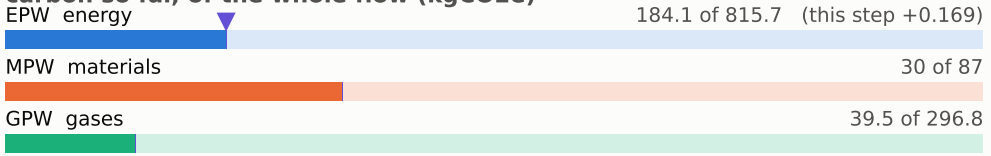

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

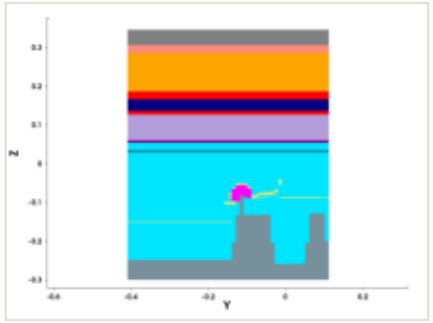

y cut at -0.150 µm

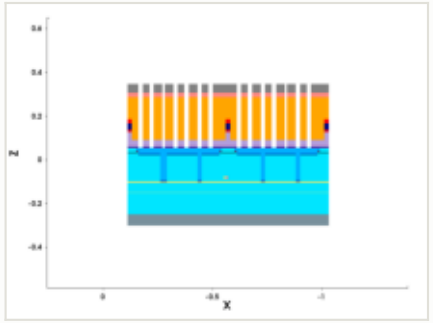

mask for this step

no mask for this step

steps by process area

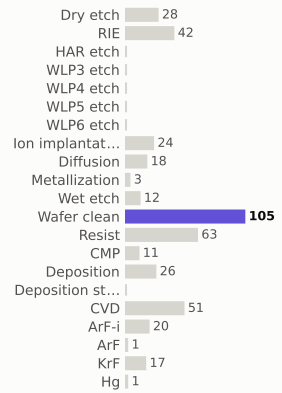

materials deposited (g)

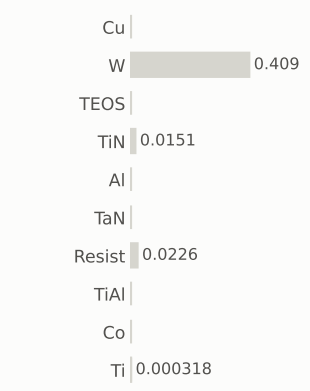

gases emitted (g)

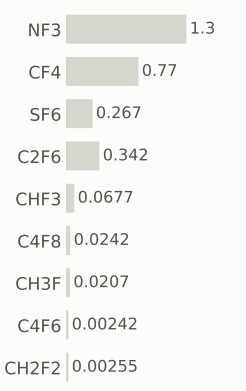

Step #5740: Resist

depo_fill · Resist

0.169	253.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

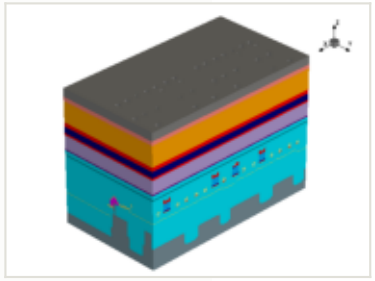

this step

process area	Resist
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

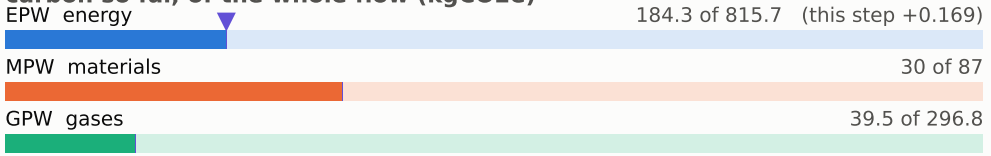

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

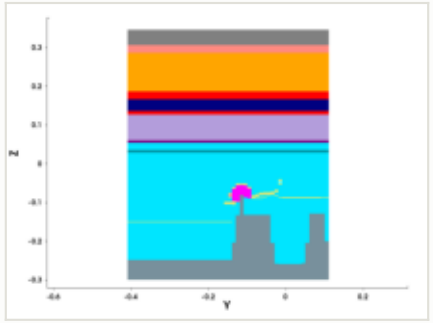

y cut at -0.150 µm

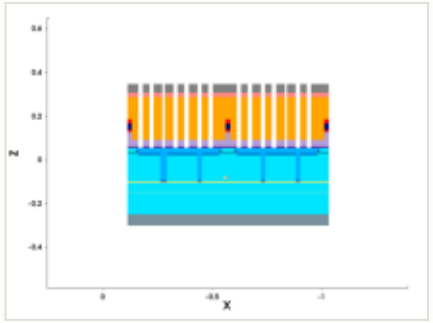

mask for this step

no mask for this step

steps by process area

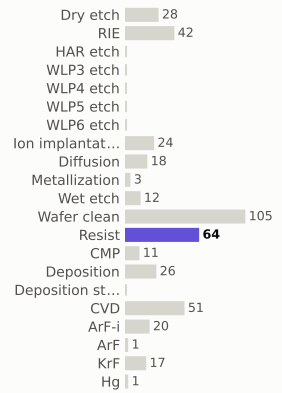

materials deposited (g)

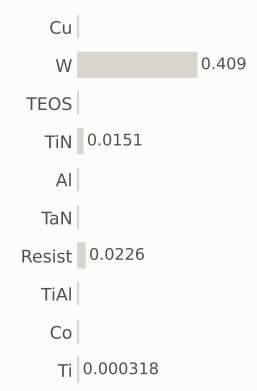

gases emitted (g)

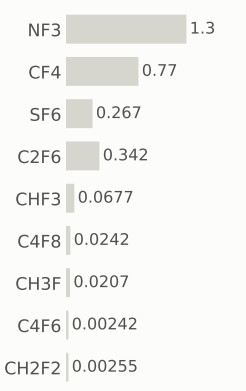

Step #5750: CVD

depo_isotropic · CVD

1.31	255.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

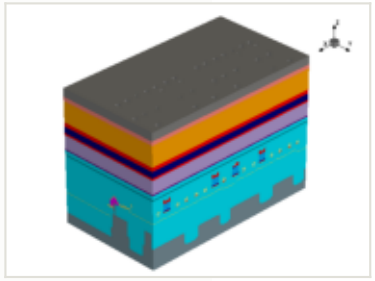

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

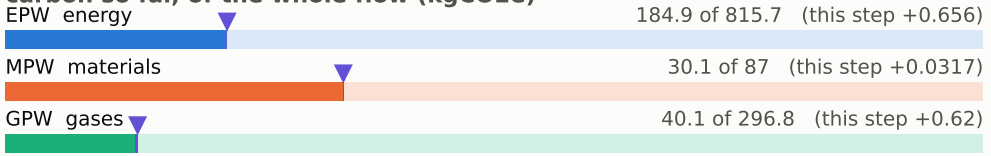

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

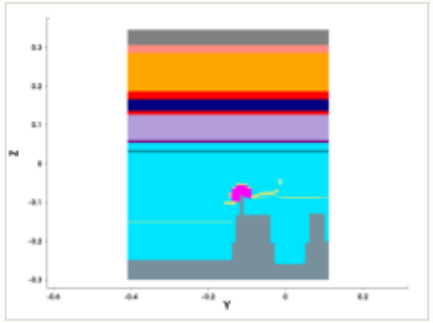

y cut at -0.150 µm

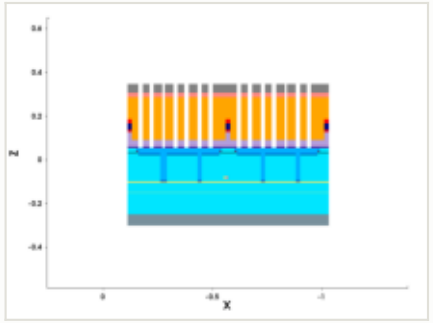

mask for this step

no mask for this step

steps by process area

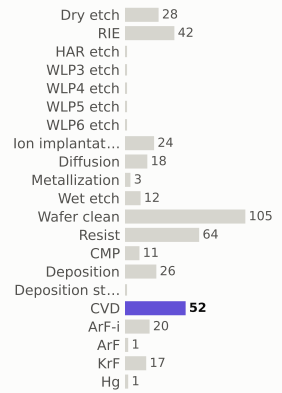

materials deposited (g)

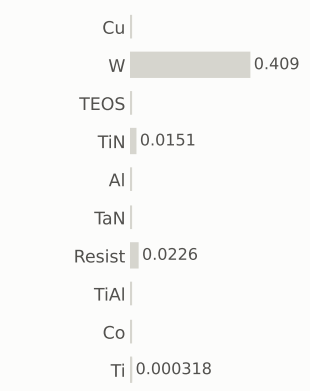

gases emitted (g)

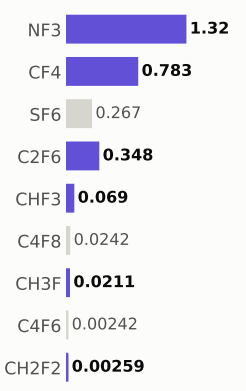

Step #5760: Wafer_clean

clean · Wafer_clean

0.169	255.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

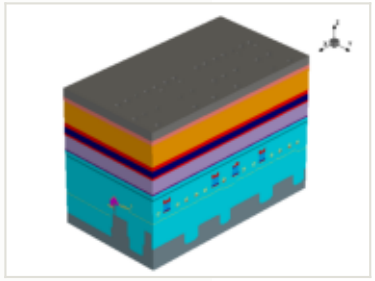

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

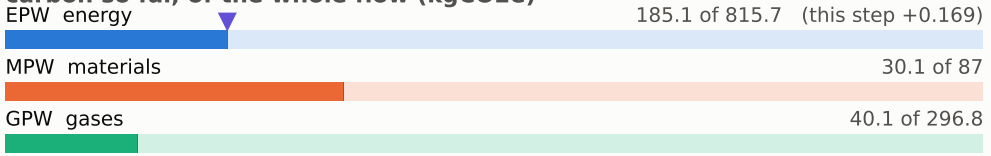

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

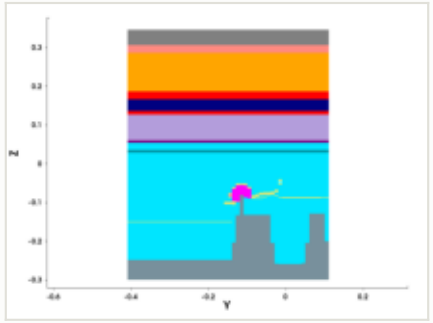

y cut at -0.150 µm

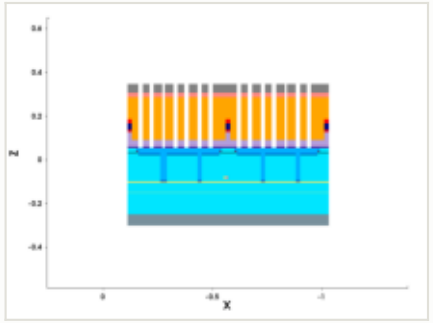

mask for this step

no mask for this step

steps by process area

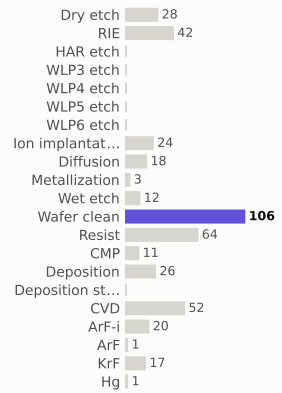

materials deposited (g)

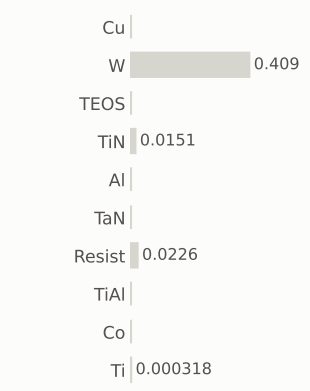

gases emitted (g)

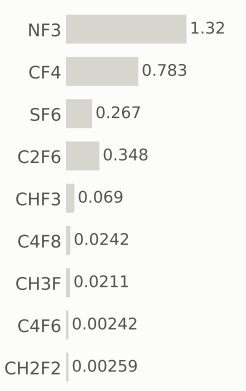

Step #5770: Resist

resist · Resist

0.169	255.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

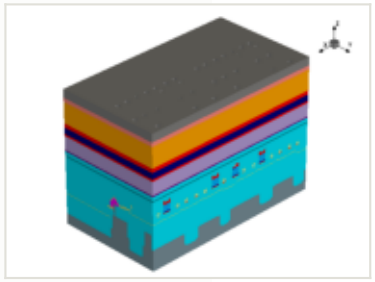

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

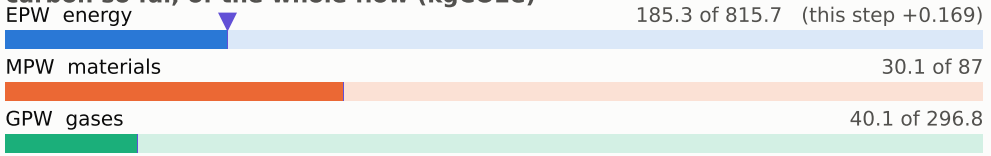

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

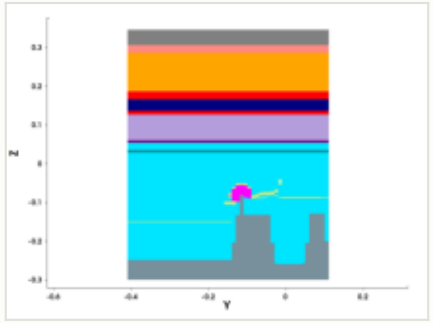

y cut at -0.150 µm

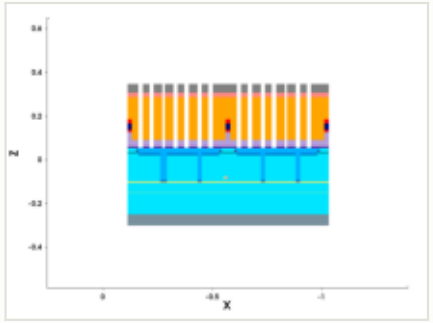

mask for this step

no mask for this step

steps by process area

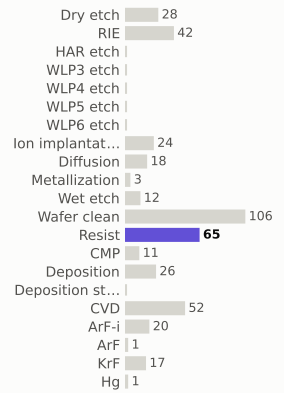

materials deposited (g)

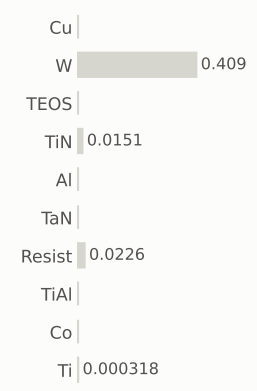

gases emitted (g)

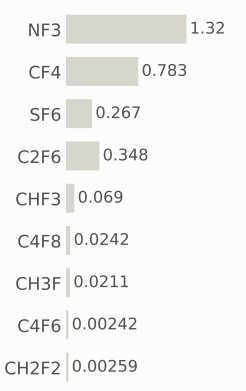

Step #5780: ArF-i

litho_patterning · ArF-i

0.217	255.7	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

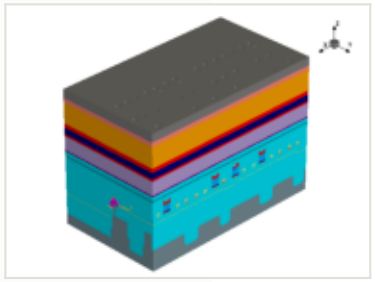

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

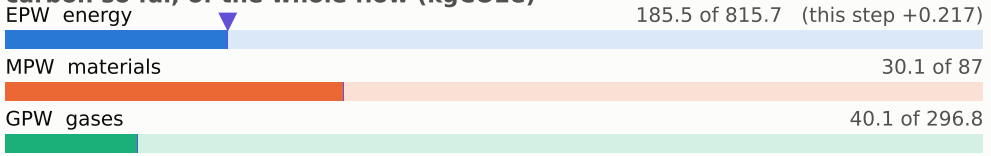

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

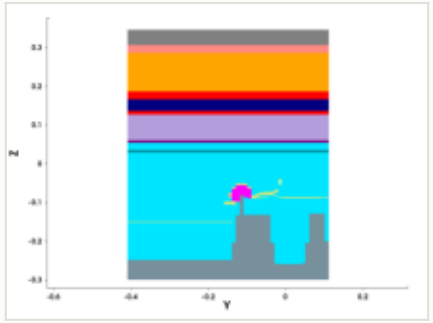

y cut at -0.150 µm

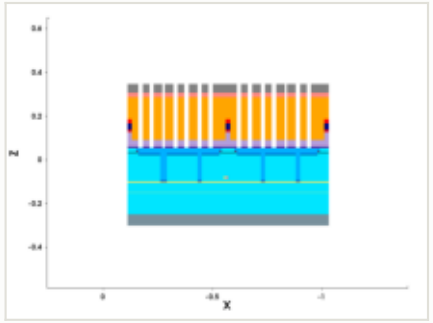

mask: layer 2100:0, positive (GDSII)

steps by process area

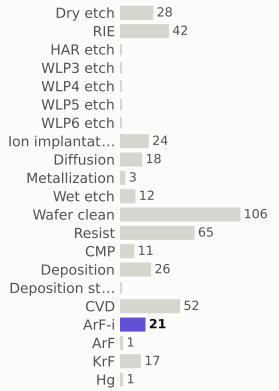

materials deposited (g)



gases emitted (g)

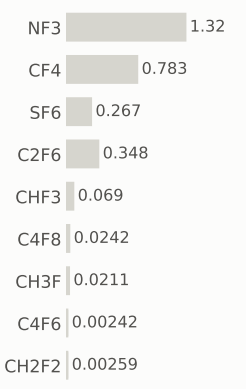

Step #5790: RIE

etch_strip · RIE

1.04	256.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

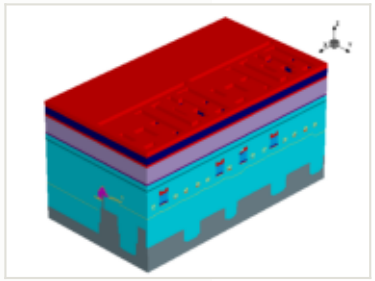

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

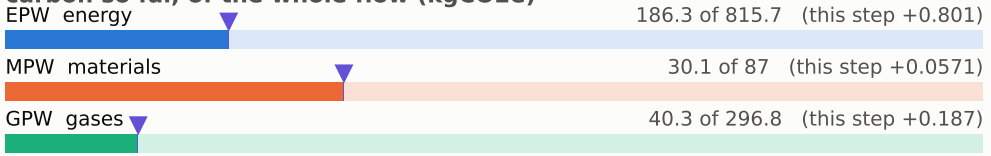

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

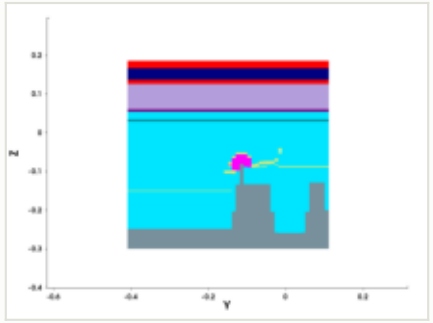

y cut at -0.150 µm

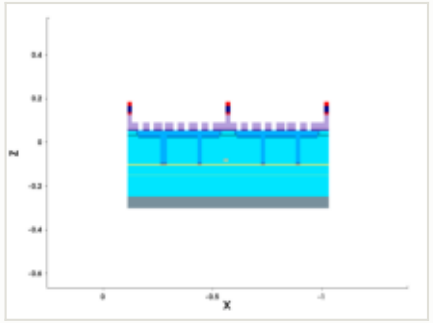

mask for this step

no mask for this step

steps by process area

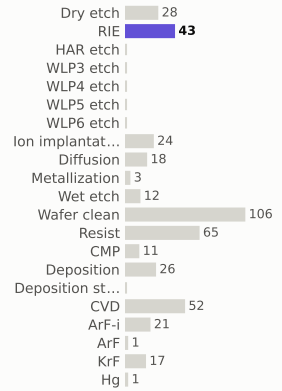

materials deposited (g)

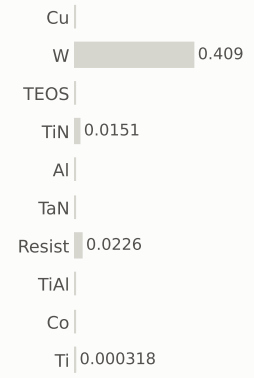

gases emitted (g)

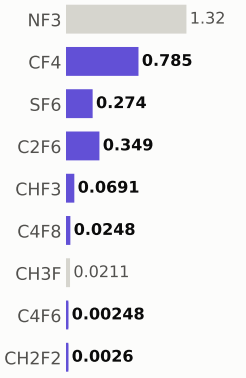

Step #5800: Wafer_clean

clean · Wafer_clean

0.169	256.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

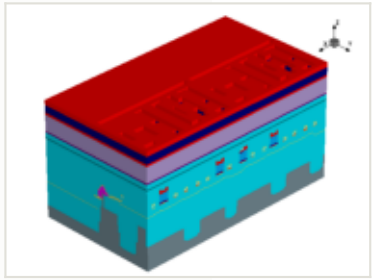

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

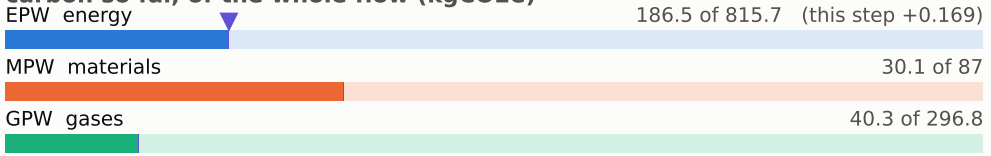

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

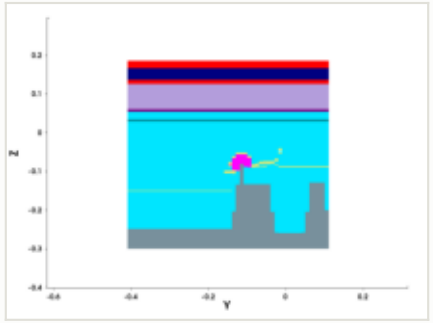

y cut at -0.150 µm

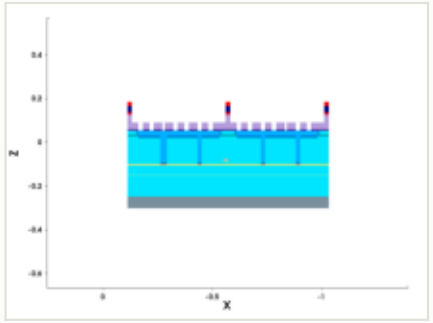

mask for this step

no mask for this step

steps by process area

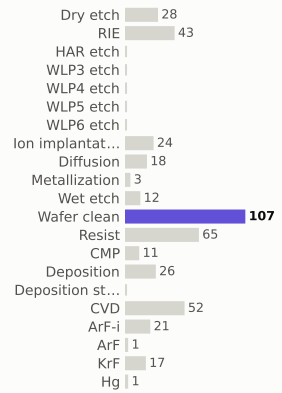

materials deposited (g)

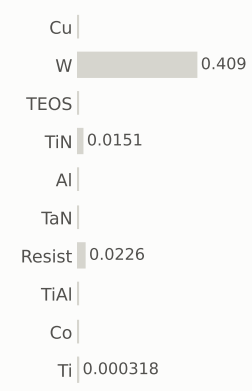

gases emitted (g)

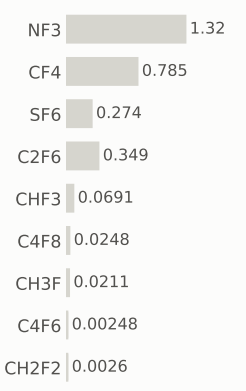

Step #5810: Resist

depo_fill · Resist

0.169	257.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

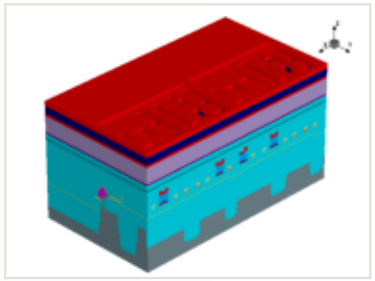

this step

process area	Resist
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

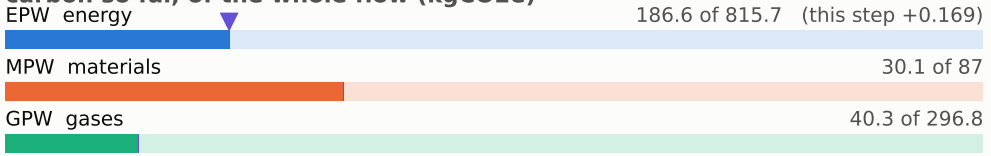

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

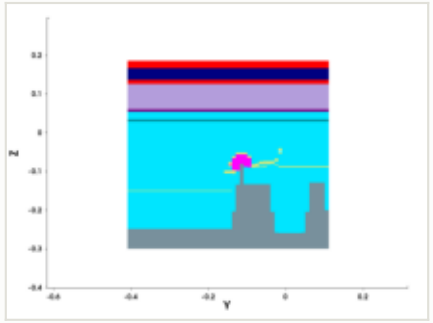

y cut at -0.150 µm

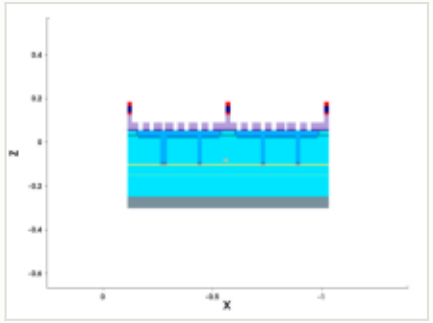

mask for this step

no mask for this step

steps by process area

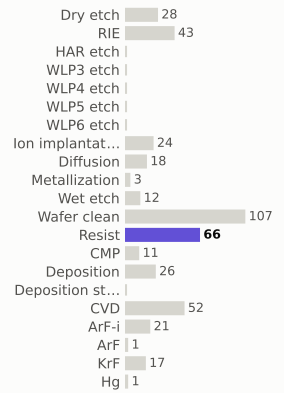

materials deposited (g)

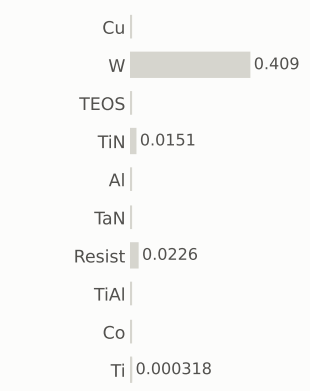

gases emitted (g)

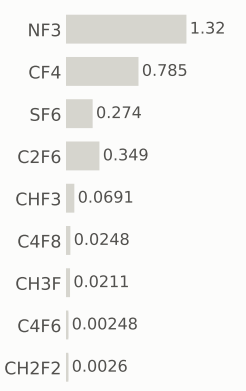

Step #5820: CVD

depo_isotropic · CVD

1.31	258.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

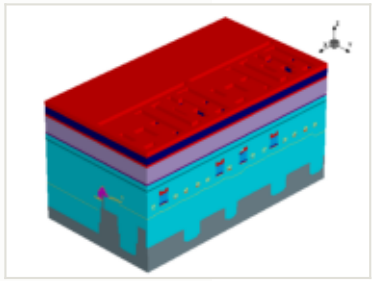

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

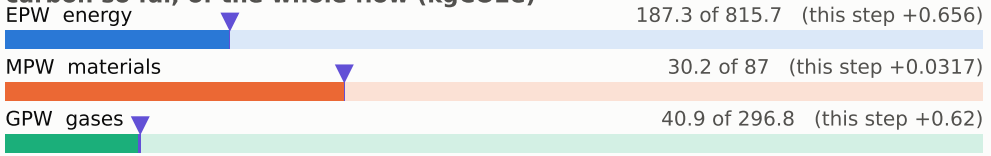

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

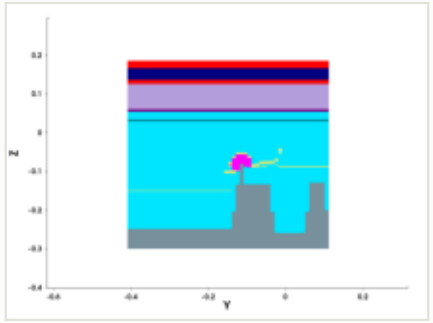

y cut at -0.150 µm

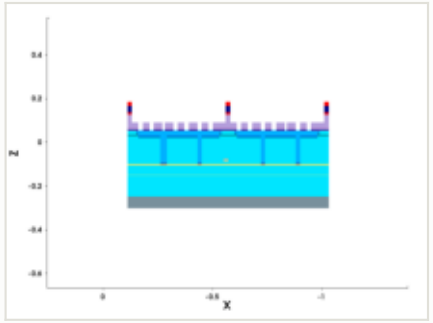

mask for this step

no mask for this step

steps by process area

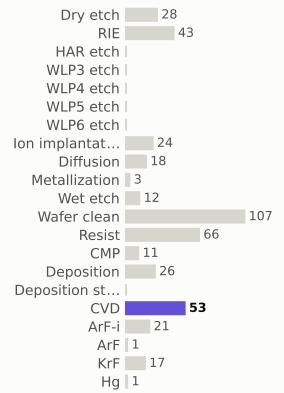

materials deposited (g)

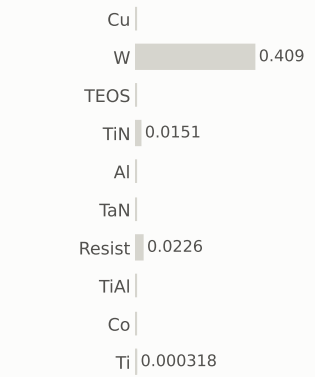

gases emitted (g)

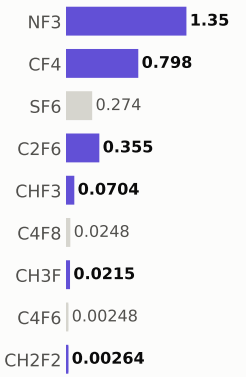

Step #5830: Wafer_clean

clean · Wafer_clean

0.169	258.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

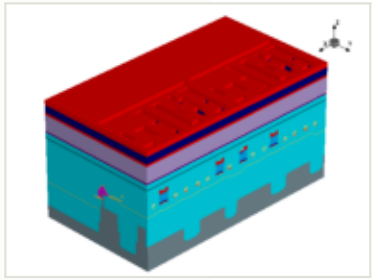

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

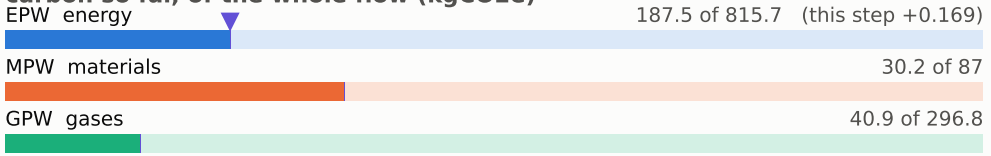

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

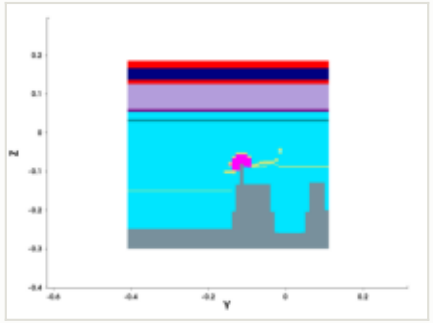

y cut at -0.150 µm

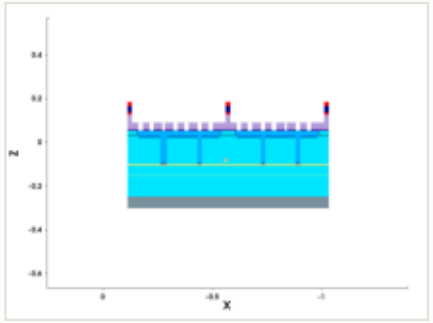

mask for this step

no mask for this step

steps by process area

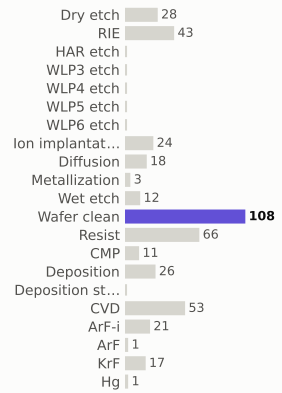

materials deposited (g)

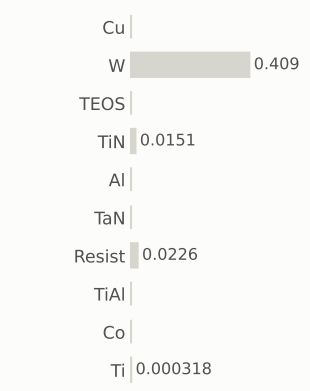

gases emitted (g)

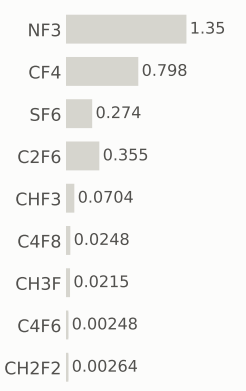

Step #5840: Resist

resist · Resist

0.169	258.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

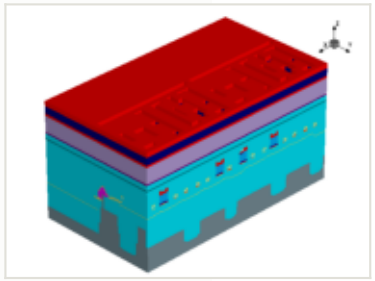

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

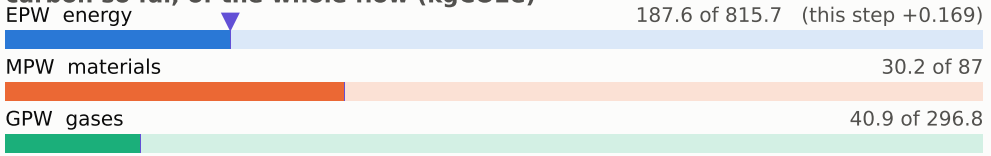

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

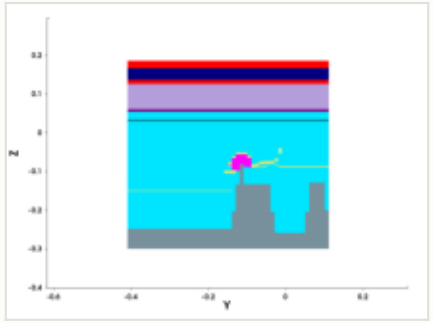

y cut at -0.150 µm

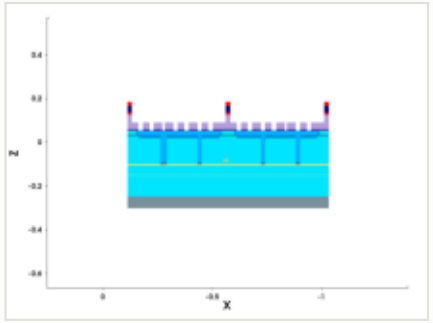

mask for this step

no mask for this step

steps by process area

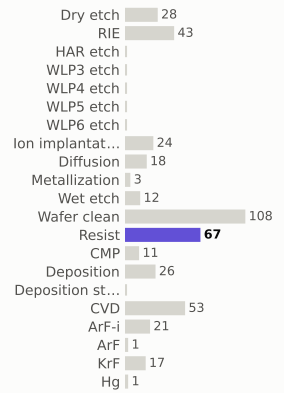

materials deposited (g)

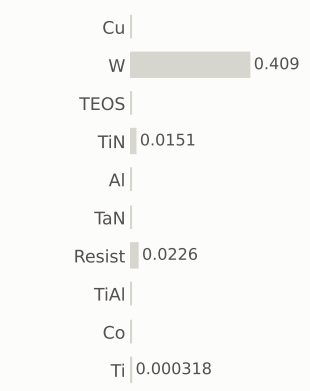

gases emitted (g)

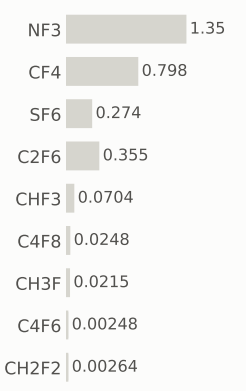

Step #5850: ArF-i

litho_patterning · ArF-i

0.217	258.9	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

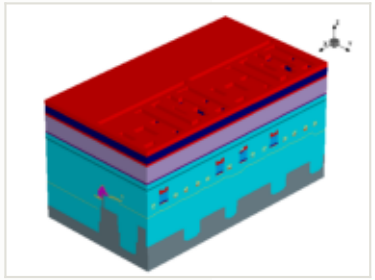

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

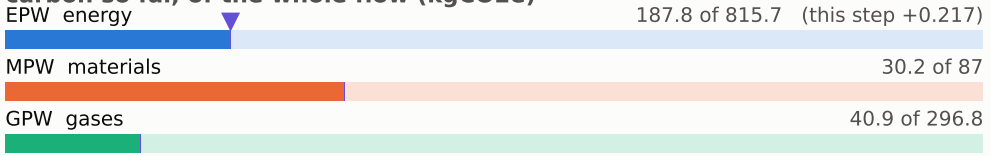

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

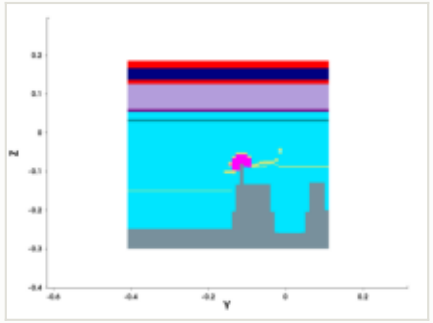

y cut at -0.150 µm

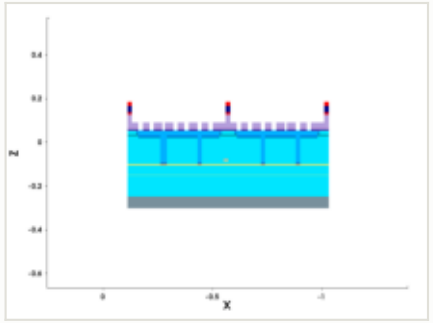

mask: layer 2100:0, positive (GDSII)

steps by process area

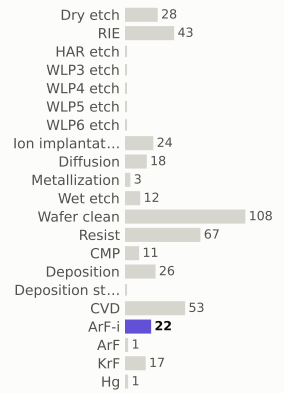

materials deposited (g)

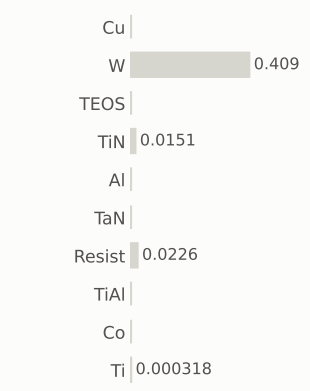

gases emitted (g)

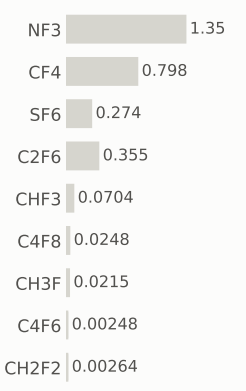

Step #5860: RIE

etch_anisotropic · RIE

1.04	260.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

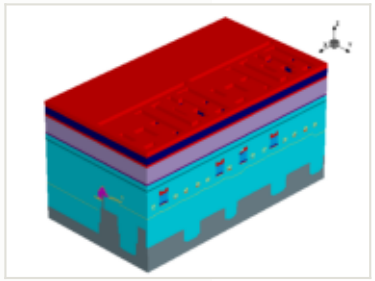

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

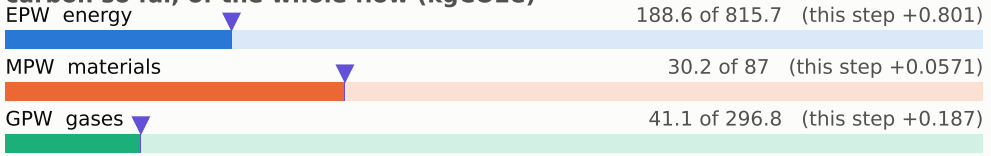

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

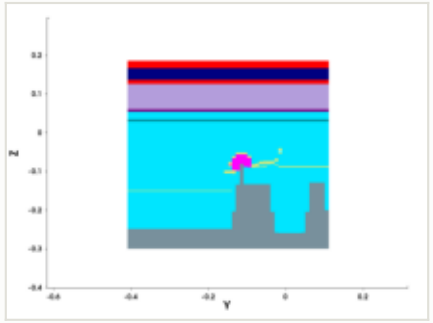

y cut at -0.150 µm

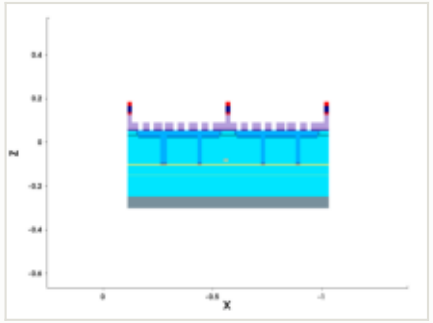

mask for this step

no mask for this step

steps by process area

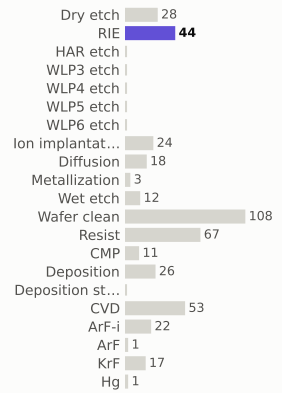

materials deposited (g)

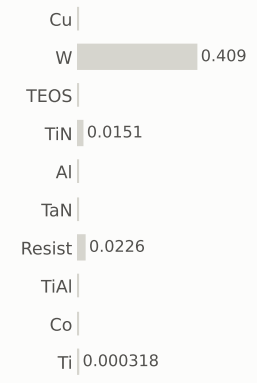

gases emitted (g)

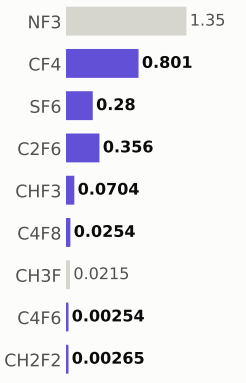

Step #5870: Wafer_clean

clean · Wafer_clean

0.169	260.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

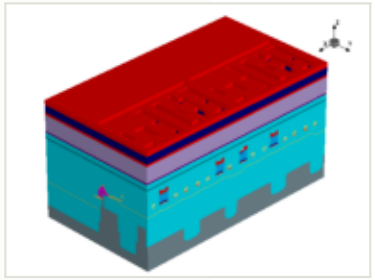

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

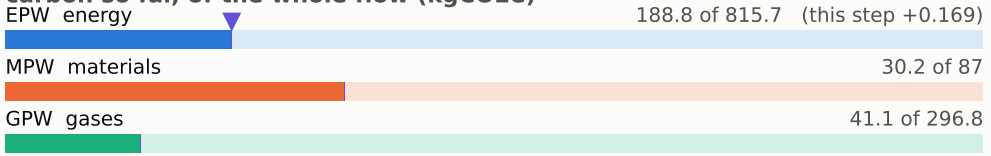

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

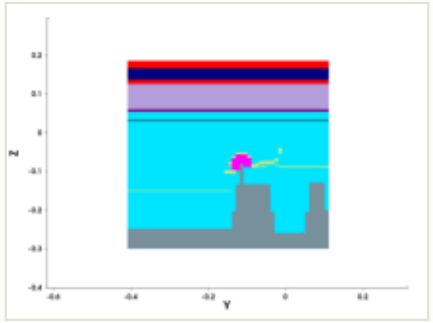

y cut at -0.150 µm

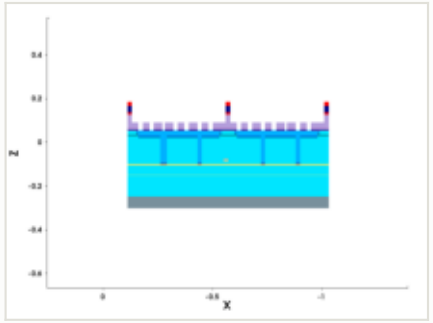

mask for this step

no mask for this step

steps by process area

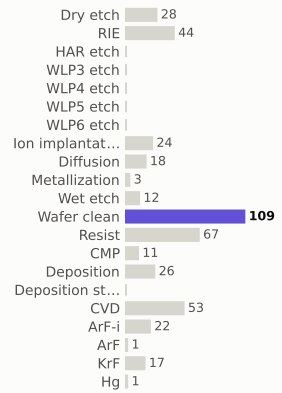

materials deposited (g)

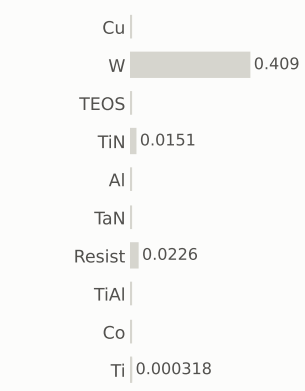

gases emitted (g)

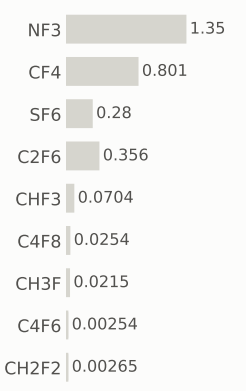

Step #5880: RIE

etch_anisotropic · RIE

1.04	261.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

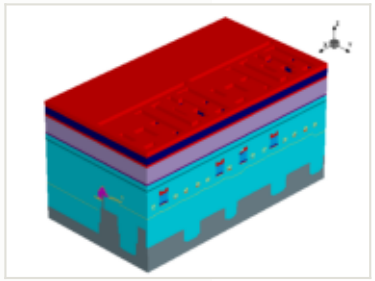

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

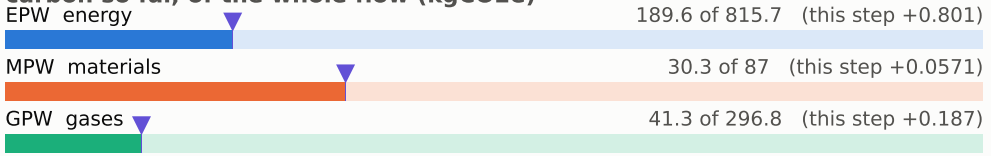

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

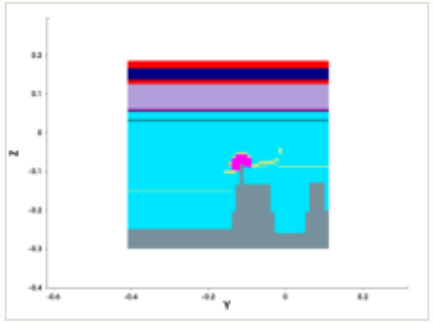

y cut at -0.150 µm

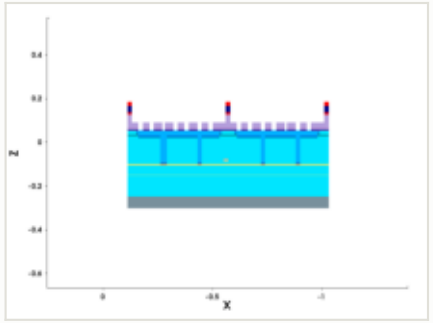

mask for this step

no mask for this step

steps by process area

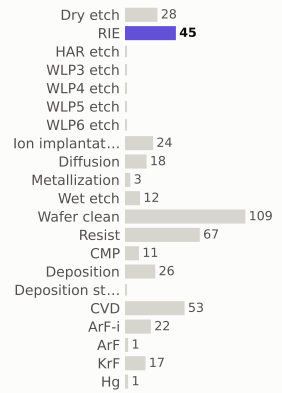

materials deposited (g)

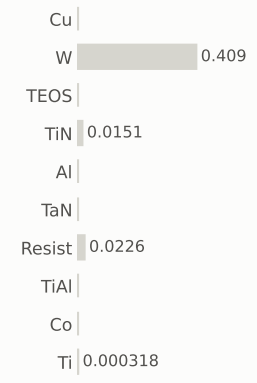

gases emitted (g)

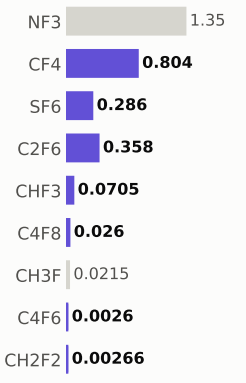

Step #5890: Wafer_clean

clean · Wafer_clean

0.169	261.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

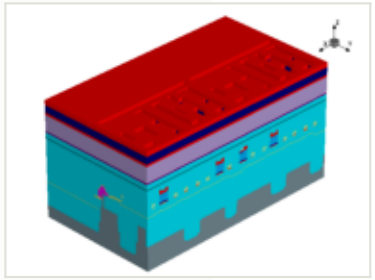

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

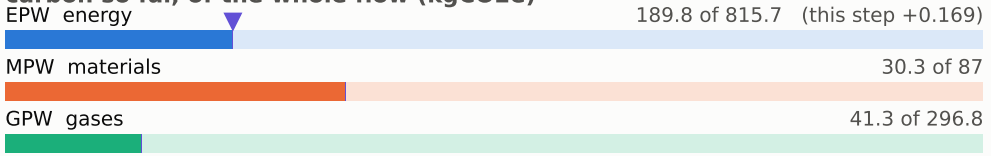

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

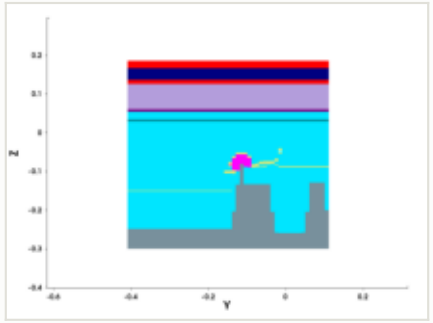

y cut at -0.150 µm

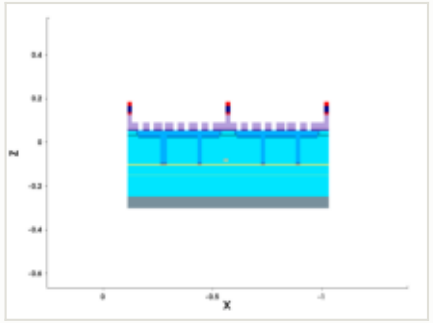

mask for this step

no mask for this step

steps by process area

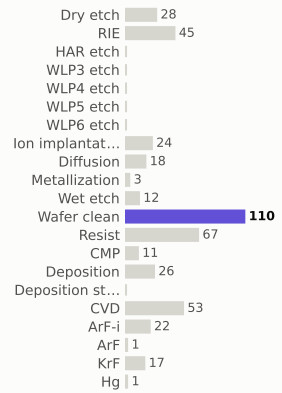

materials deposited (g)

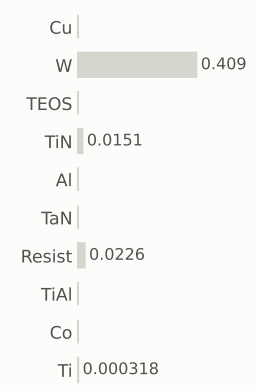

gases emitted (g)

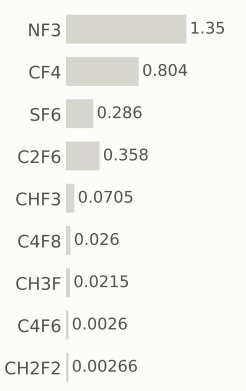

Step #5900: Metallization

depo_ellipsoidal · Metallization

1.2	262.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

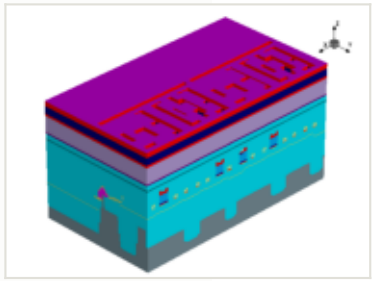

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

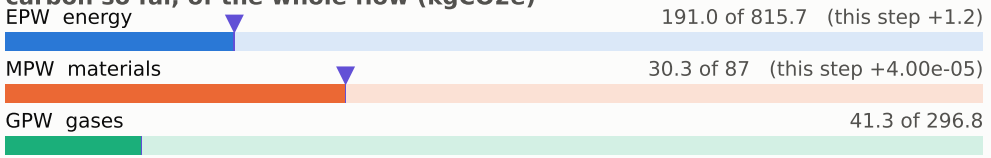

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

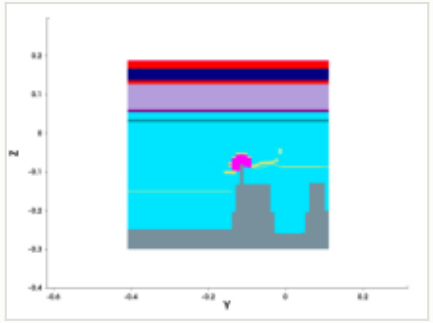

y cut at -0.150 µm

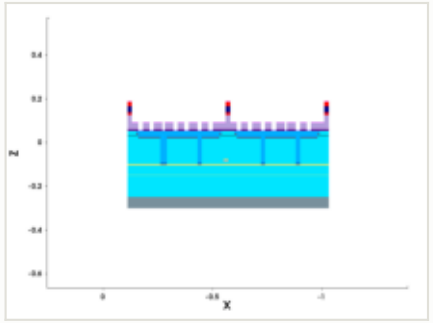

mask for this step

no mask for this step

steps by process area

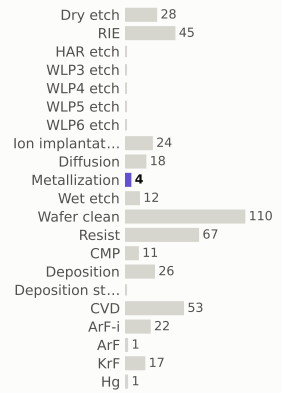

materials deposited (g)

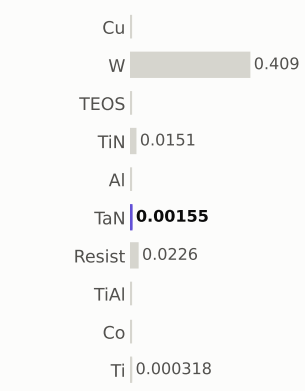

gases emitted (g)

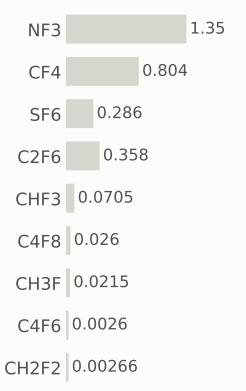

Step #5910: Metallization

depo_fill · Metallization

1.21	263.8	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

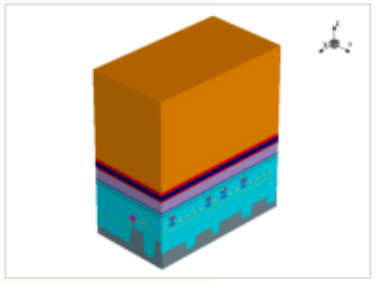

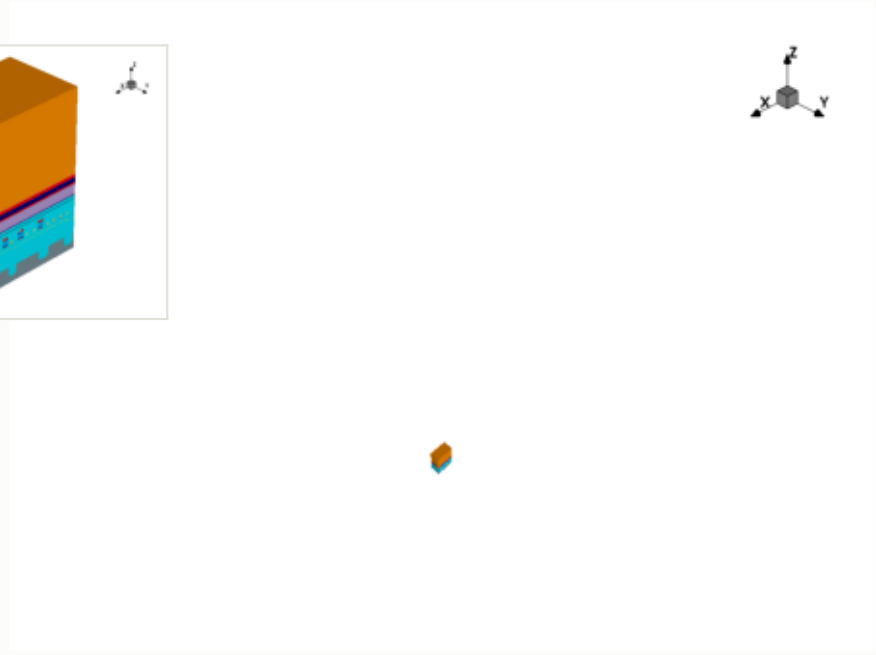

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

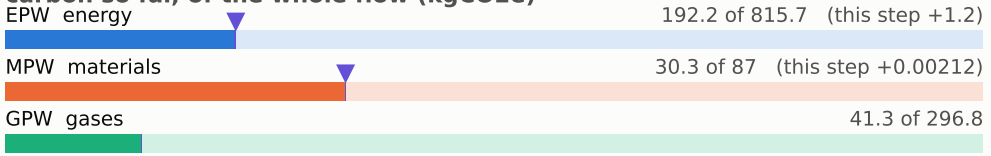

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

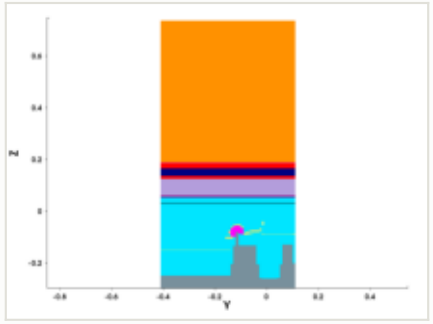

y cut at -0.150 µm

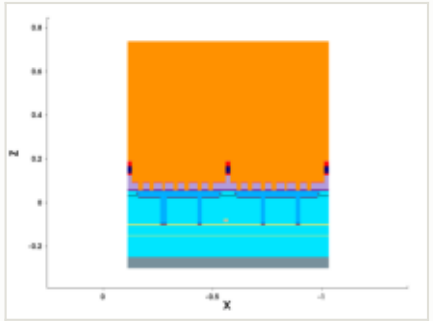

mask for this step

no mask for this step

steps by process area

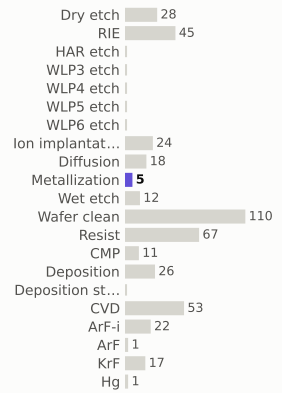

materials deposited (g)

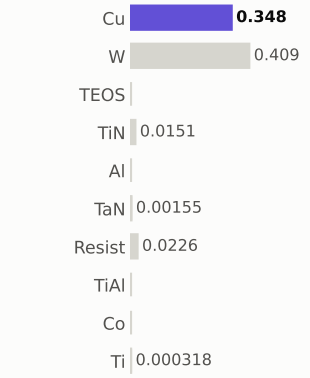

gases emitted (g)

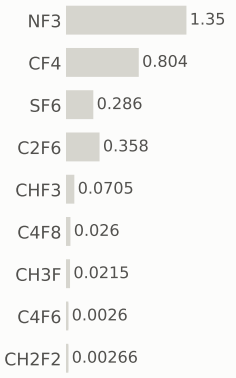

Step #5920: Diffusion

anneal · Diffusion

0.801	264.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

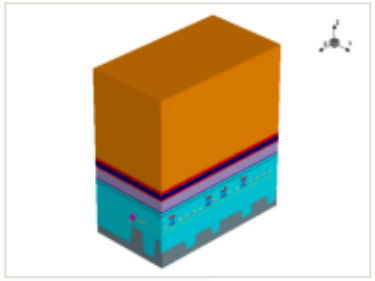

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

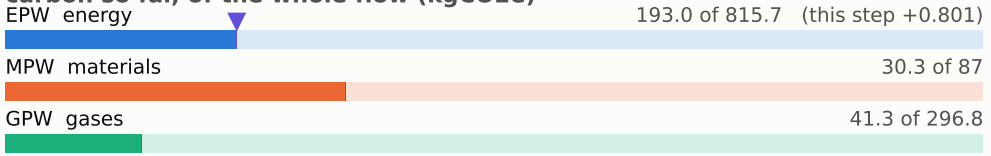

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

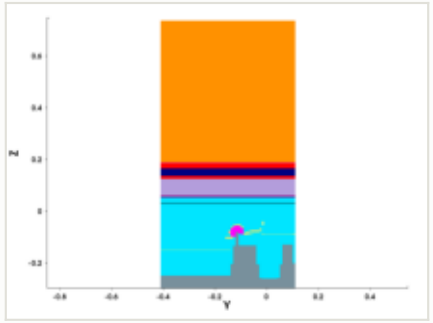

y cut at -0.150 µm

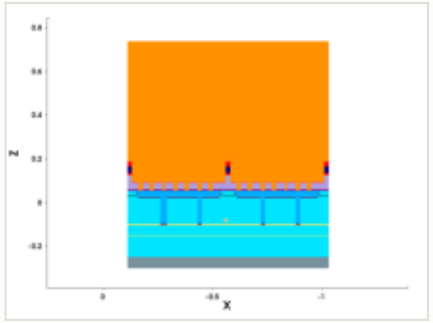

mask for this step

no mask for this step

steps by process area

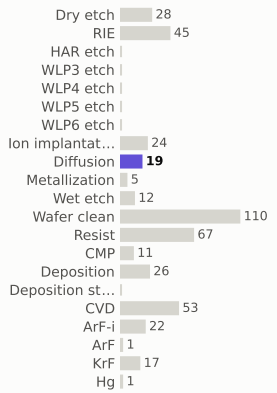

materials deposited (g)

gases emitted (g)

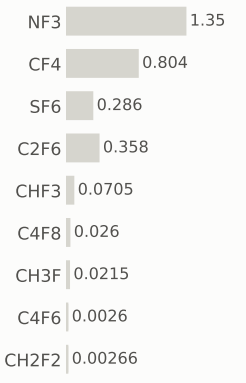

Step #5930: CMP

etch_cmp · CMP

0.169	264.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

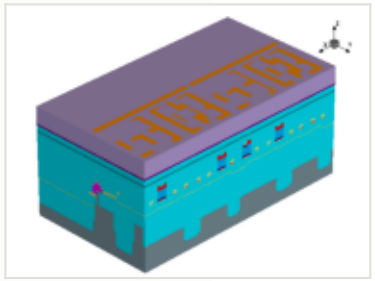

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

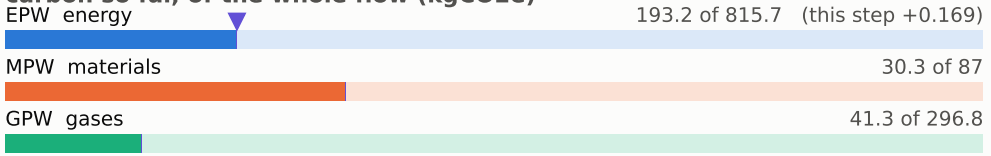

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

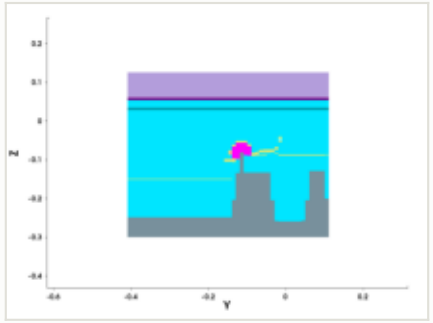

y cut at -0.150 µm

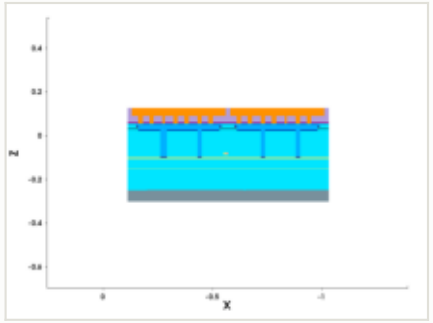

mask for this step

no mask for this step

steps by process area

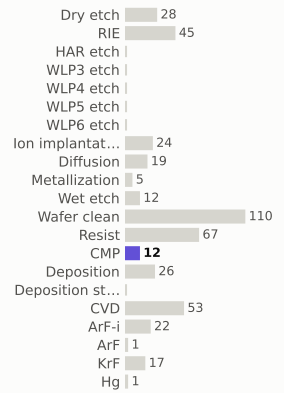

materials deposited (g)

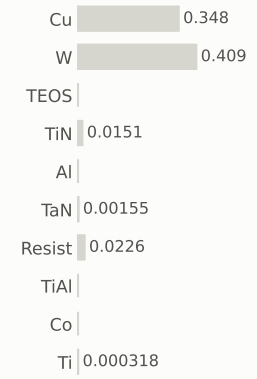

gases emitted (g)

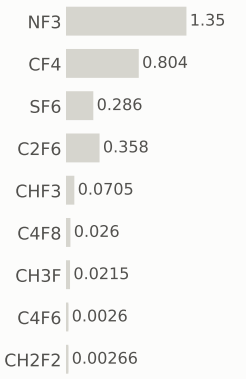

Step #5940: Wafer_clean

clean · Wafer_clean

0.169	264.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

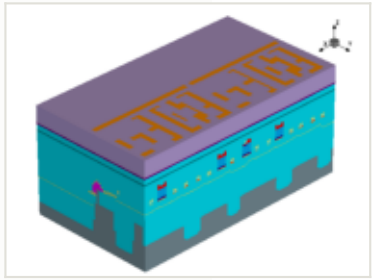

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

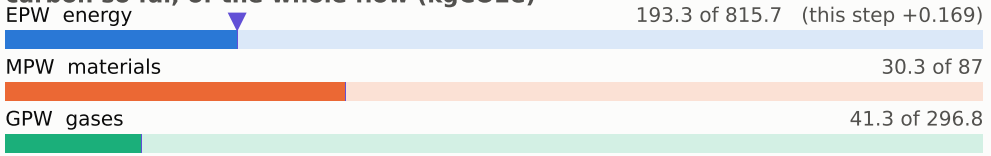

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

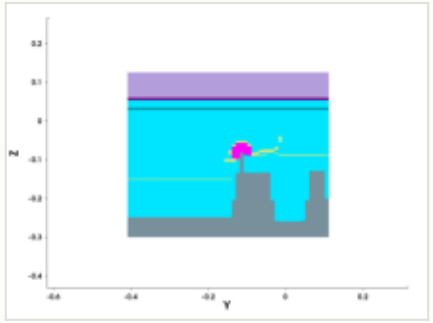

y cut at -0.150 µm

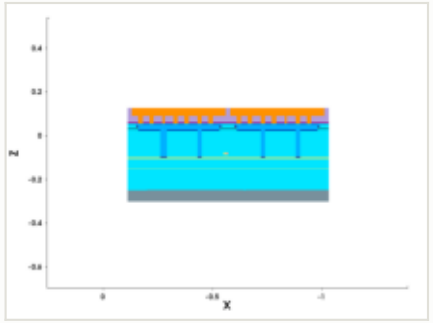

mask for this step

no mask for this step

steps by process area

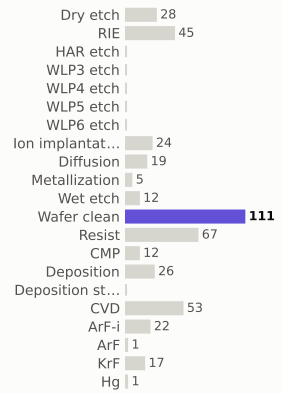

materials deposited (g)

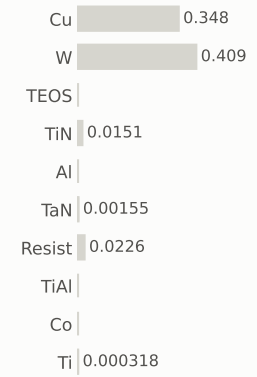

gases emitted (g)

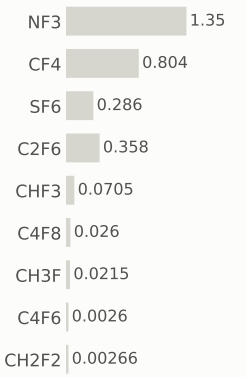

Step #5950: Metallization

depo_isotropic · Metallization

1.2	266.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

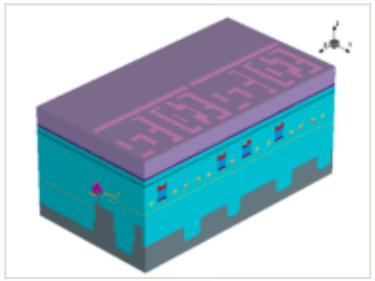

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

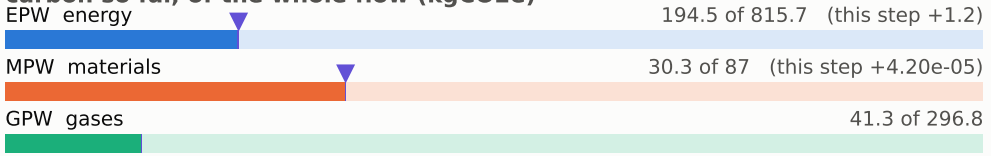

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

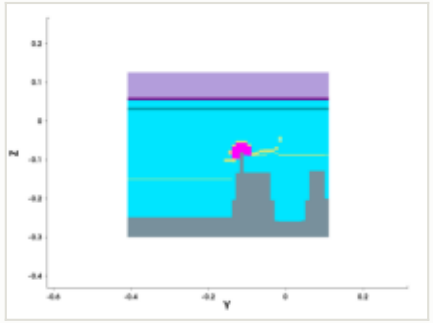

y cut at -0.150 µm

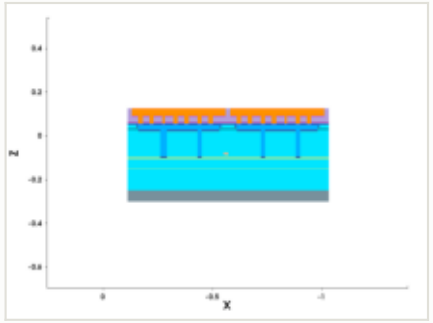

mask for this step

no mask for this step

steps by process area

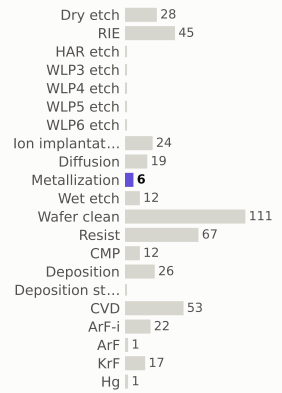

materials deposited (g)

gases emitted (g)

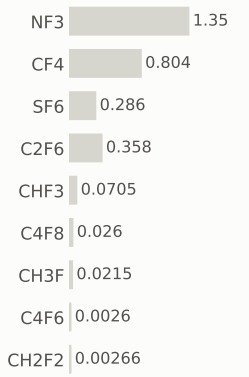

Step #5970: Deposition

depo_fill · Deposition

0.656	266.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

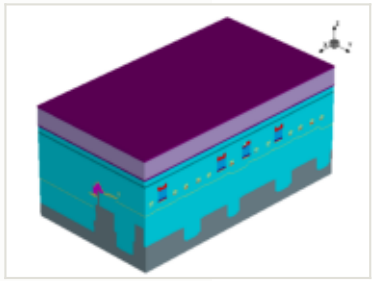

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.006 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

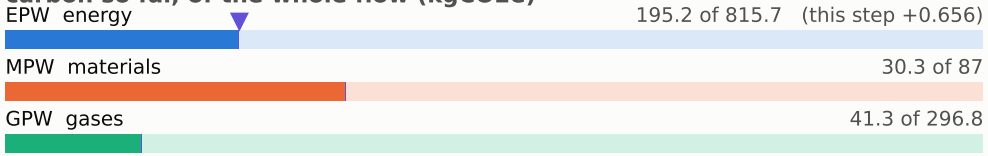

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

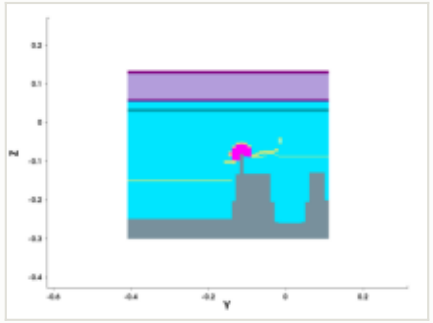

y cut at -0.150 µm

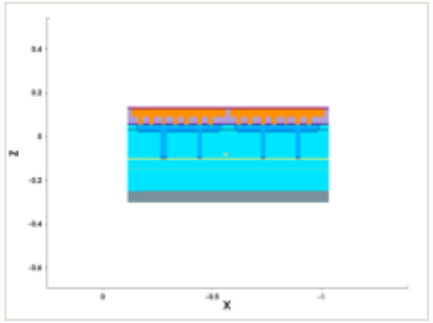

mask for this step

no mask for this step

steps by process area

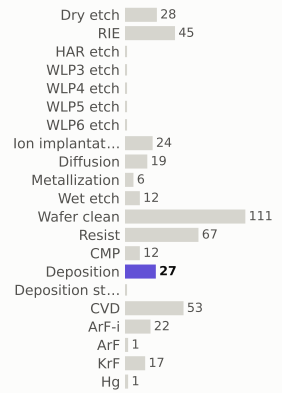

materials deposited (g)

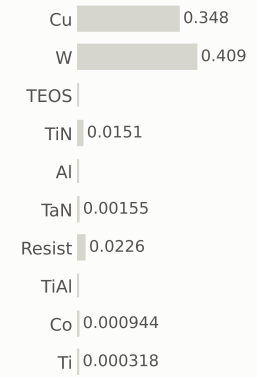

gases emitted (g)

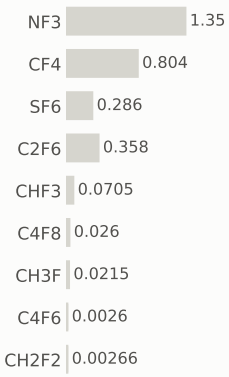

Step #5980: CVD

depo_fill · CVD

1.31	268.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

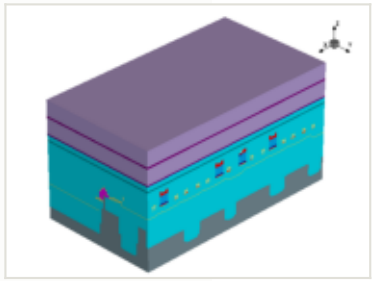

this step

process area	CVD
material	—
thickness	0.066 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

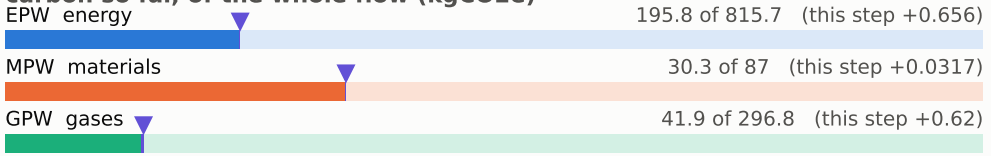

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

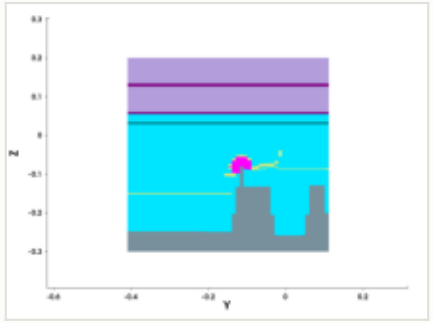

y cut at -0.150 µm

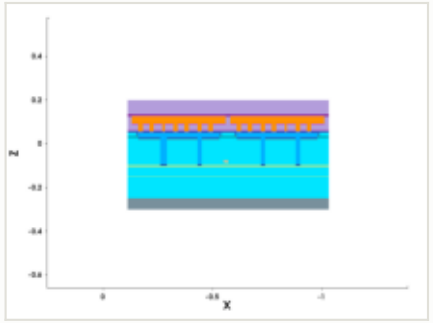

mask for this step

no mask for this step

steps by process area

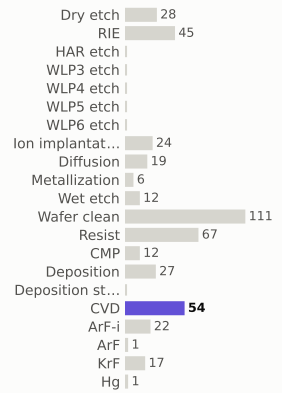

materials deposited (g)

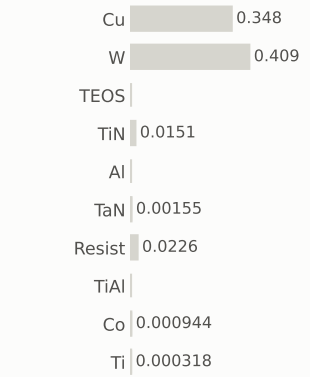

gases emitted (g)

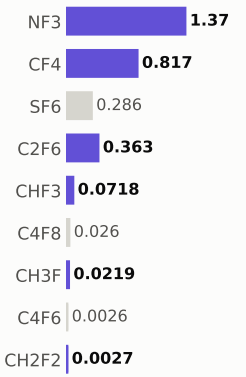

Step #5990: Diffusion

anneal · Diffusion

0.801	268.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

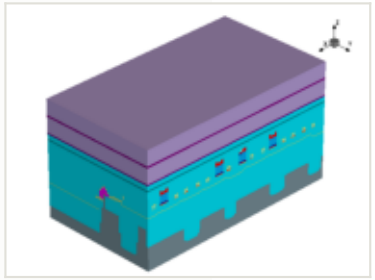

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

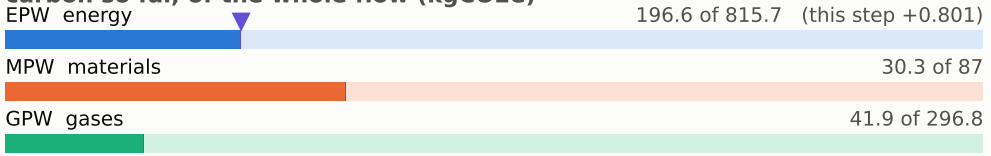

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

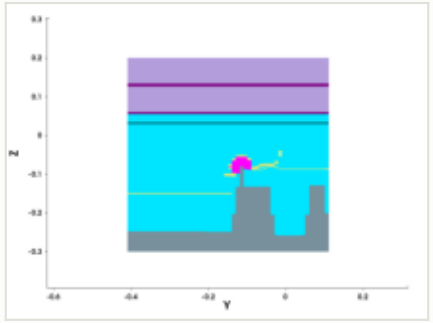

y cut at -0.150 µm

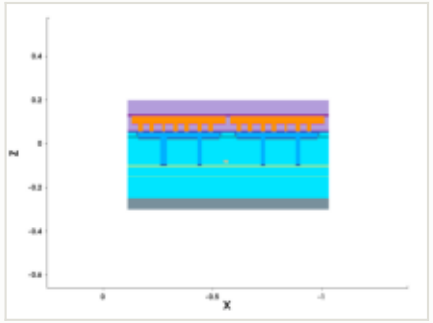

mask for this step

no mask for this step

steps by process area

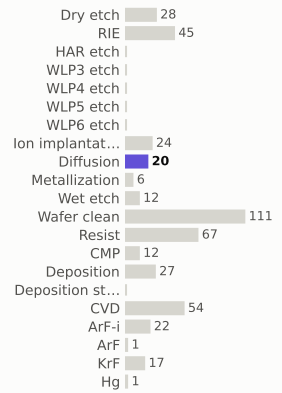

materials deposited (g)

gases emitted (g)

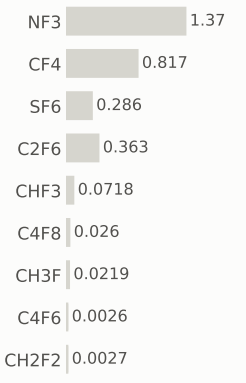

Step #6000: Wafer_clean

clean · Wafer_clean

0.169	269.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

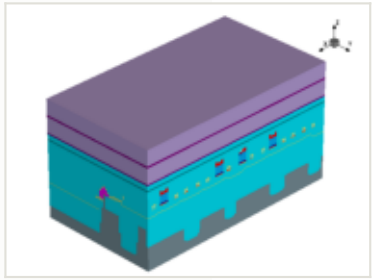

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

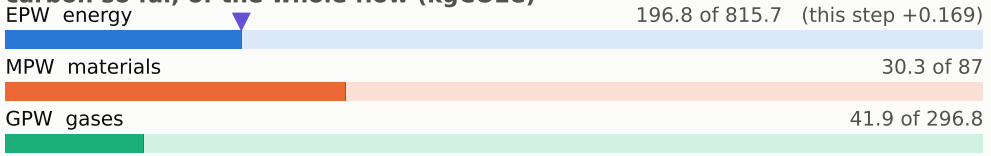

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

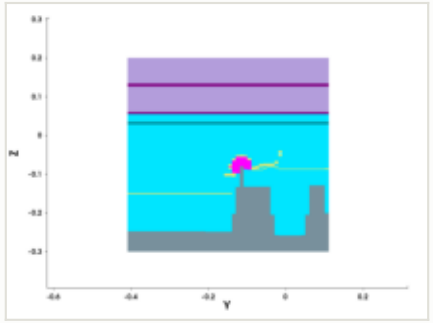

y cut at -0.150 µm

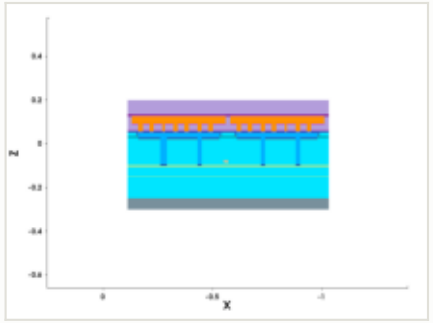

mask for this step

no mask for this step

steps by process area

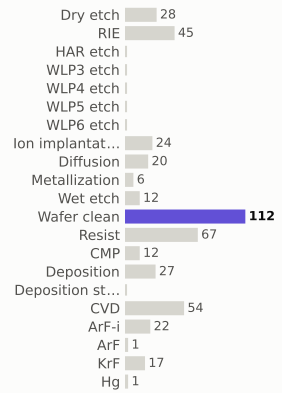

materials deposited (g)

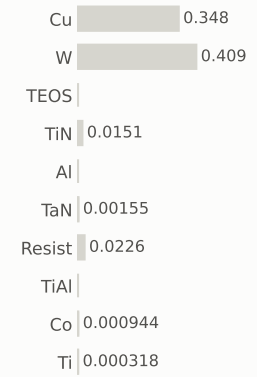

gases emitted (g)

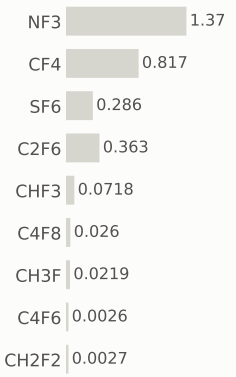

Step #6010: CVD

depo_fill · CVD

1.31	270.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

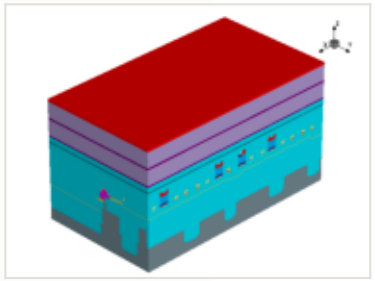

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

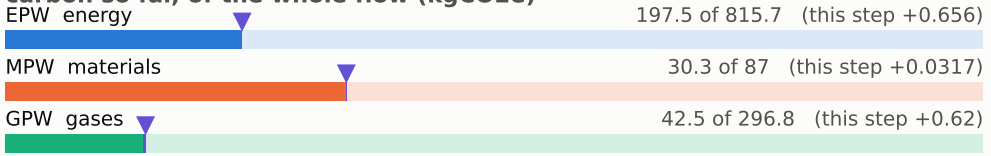

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

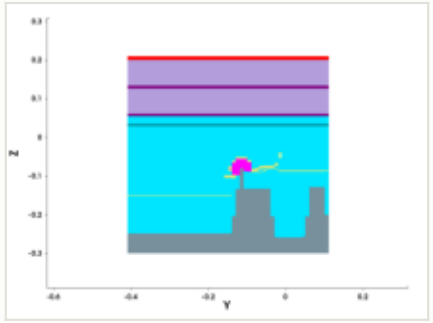

y cut at -0.150 µm

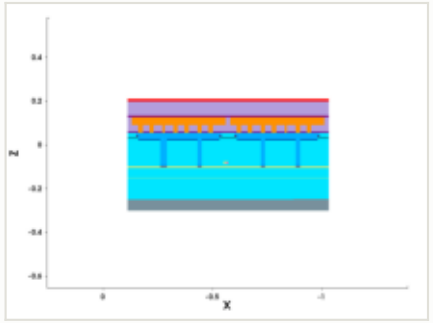

mask for this step

no mask for this step

steps by process area

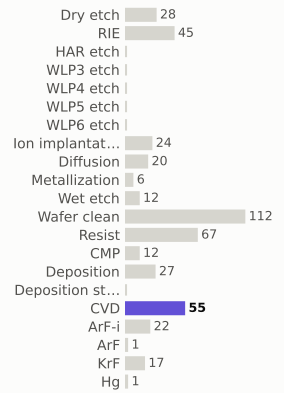

materials deposited (g)

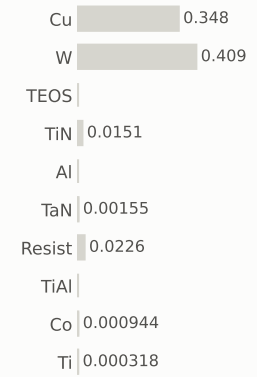

gases emitted (g)

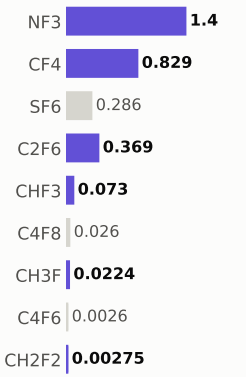

Step #6020: Deposition

depo_fill · Deposition

0.657	271.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

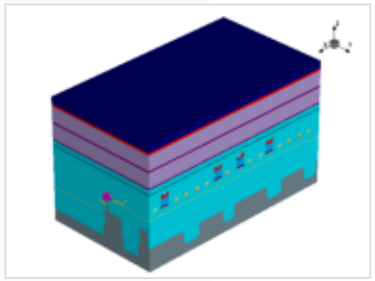

this step

process area	Deposition
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000486 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.657 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

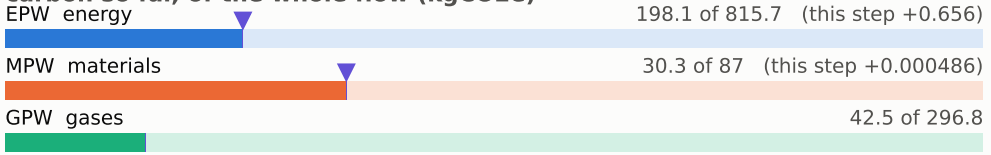

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

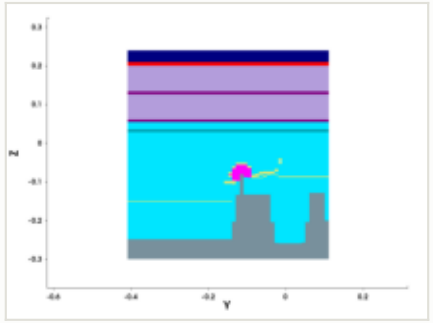

y cut at -0.150 µm

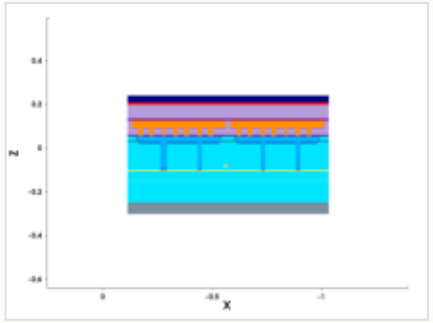

mask for this step

no mask for this step

steps by process area

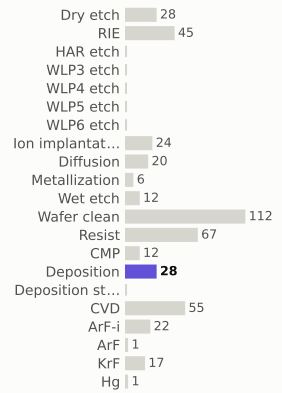

materials deposited (g)

gases emitted (g)



Step #6030: Wafer_clean

clean · Wafer_clean

0.169	271.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

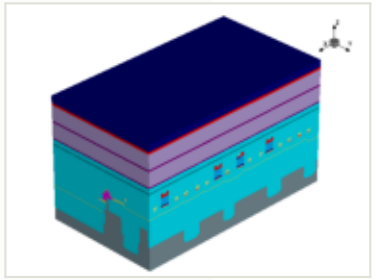

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

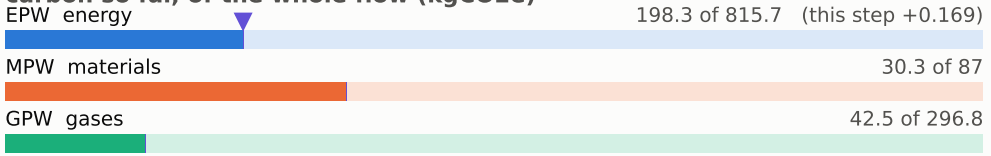

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

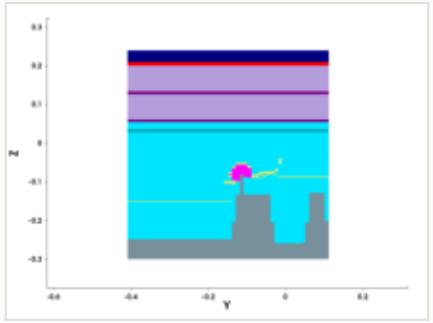

y cut at -0.150 µm

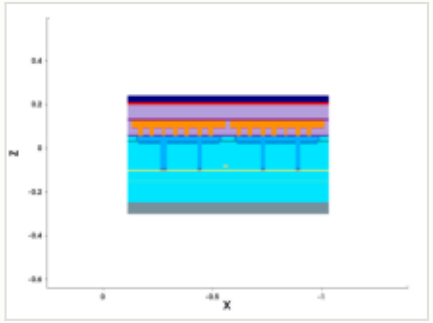

mask for this step

no mask for this step

steps by process area

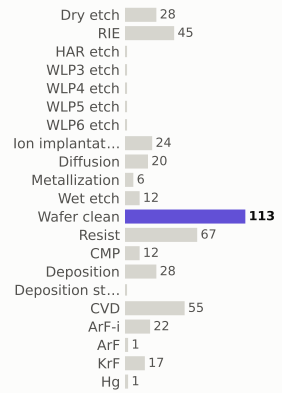

materials deposited (g)

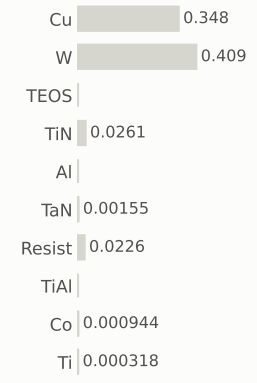

gases emitted (g)



Step #6040: CVD

depo_fill · CVD

1.31	272.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

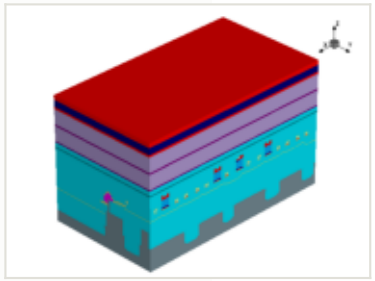

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

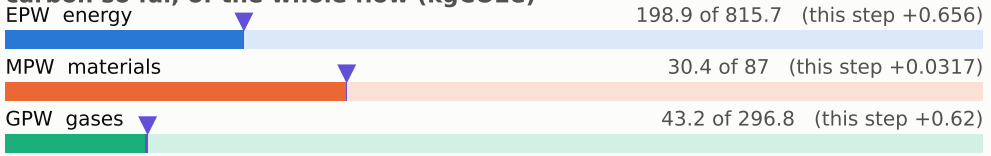

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

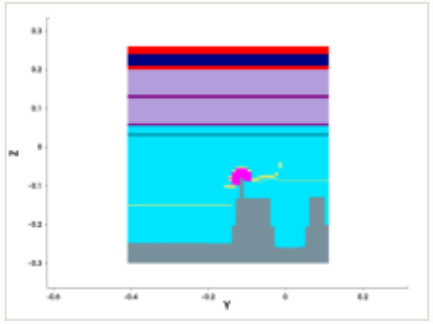

y cut at -0.150 µm

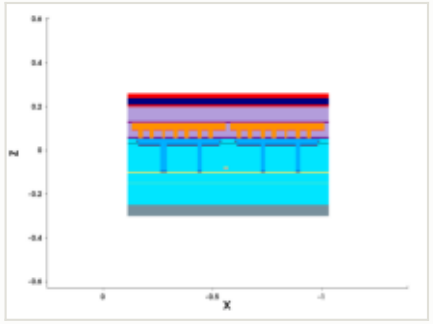

mask for this step

no mask for this step

steps by process area

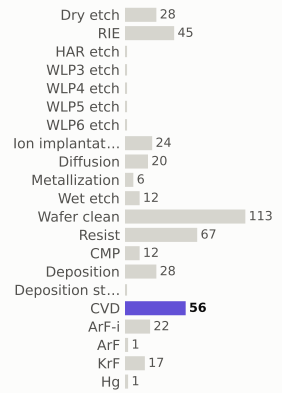

materials deposited (g)

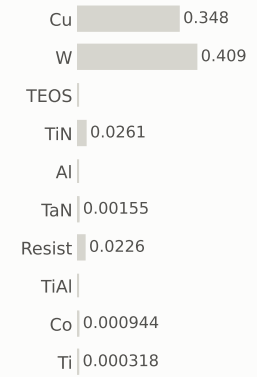

gases emitted (g)

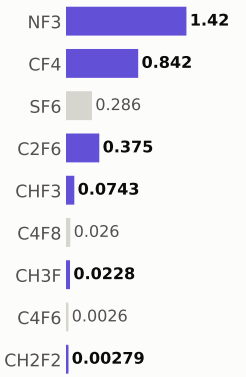

Step #6050: Resist

depo_fill · Resist

0.169	272.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

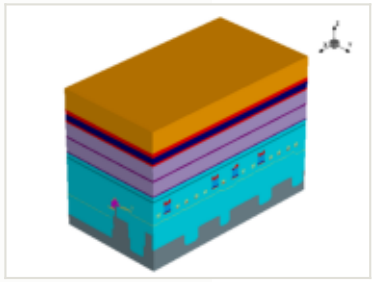

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

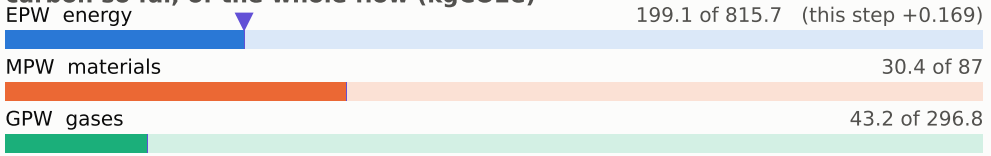

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

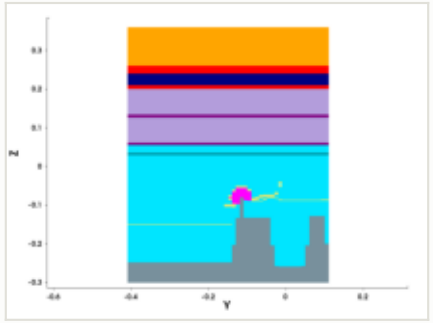

y cut at -0.150 µm

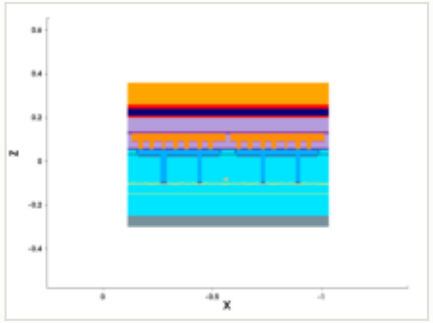

mask for this step

no mask for this step

steps by process area

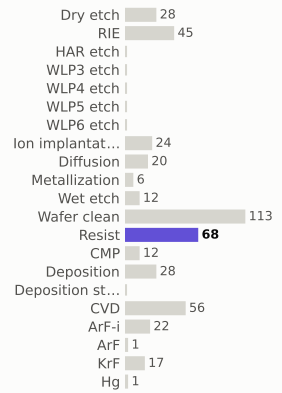

materials deposited (g)

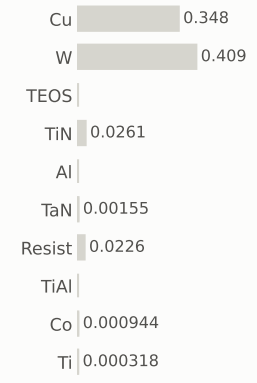

gases emitted (g)

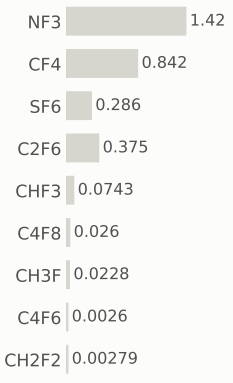

Step #6060: CVD

depo_fill · CVD

1.31	274.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

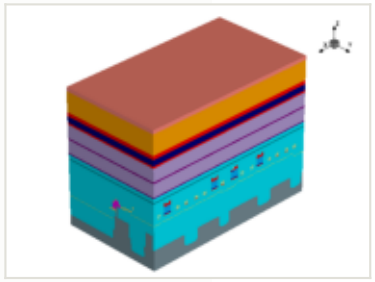

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

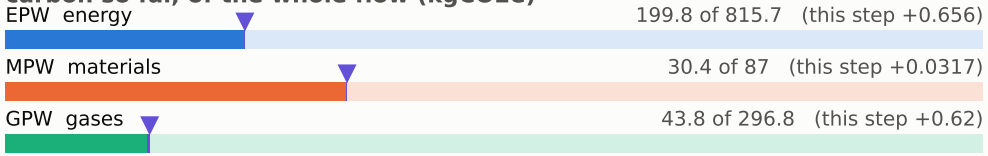

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

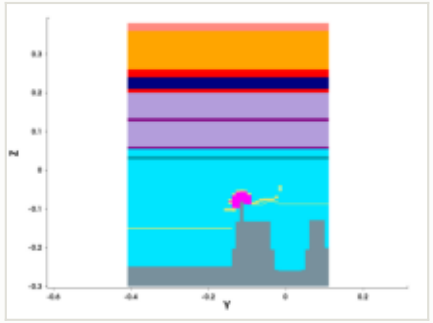

y cut at -0.150 µm

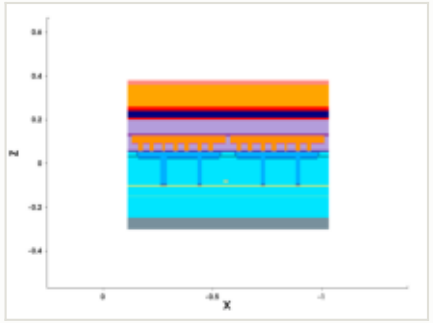

mask for this step

no mask for this step

steps by process area

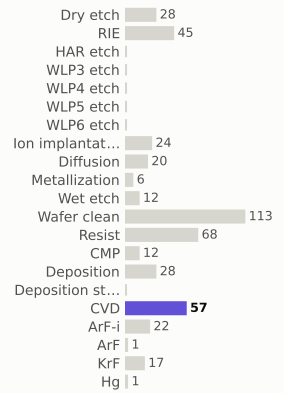

materials deposited (g)

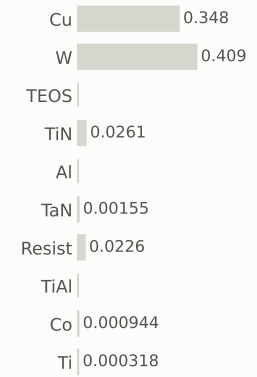

gases emitted (g)

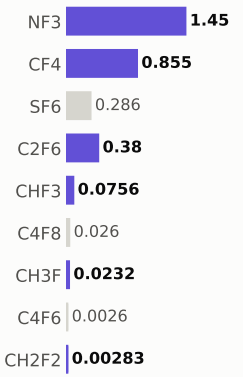

Step #6070: Wafer_clean

clean · Wafer_clean

0.169	274.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

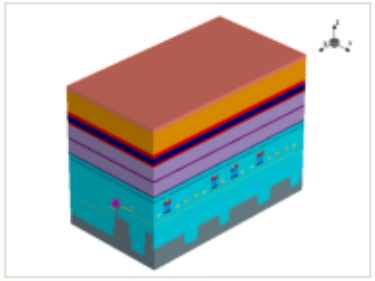

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

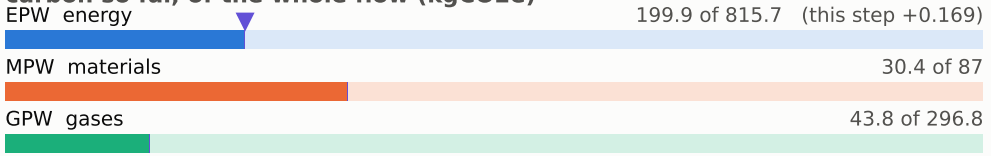

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

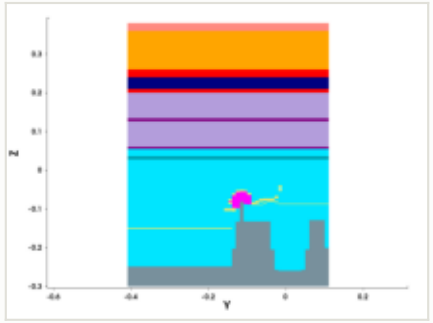

y cut at -0.150 µm

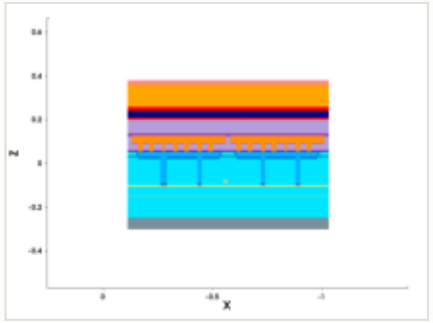

mask for this step

no mask for this step

steps by process area

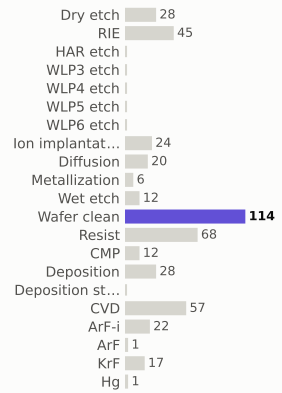

materials deposited (g)



gases emitted (g)

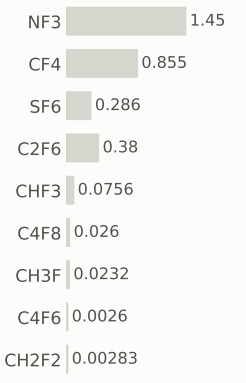

Step #6080: Resist

resist · Resist

0.169	274.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

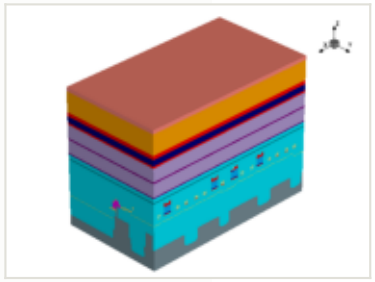

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

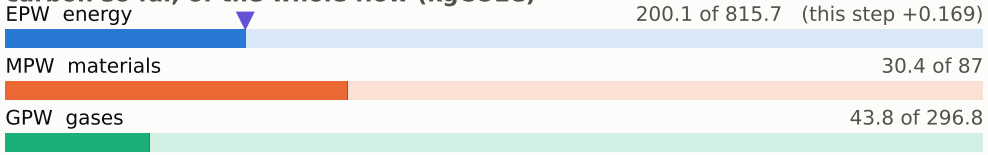

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

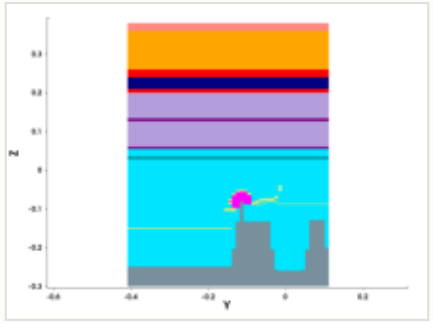

y cut at -0.150 µm

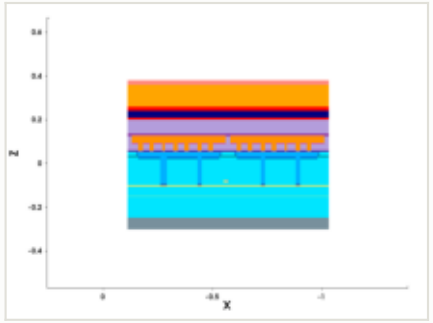

mask for this step

no mask for this step

steps by process area

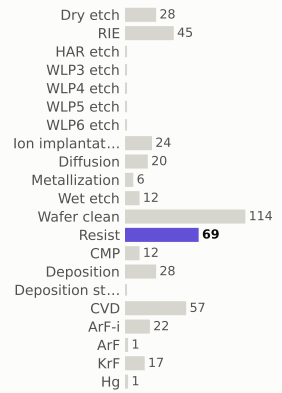

materials deposited (g)

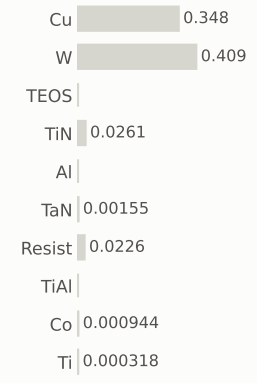

gases emitted (g)

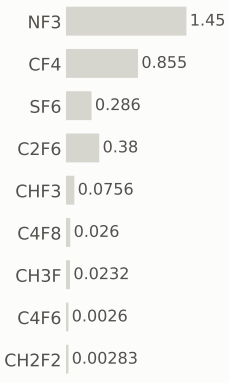

Step #6090: ArF-i

litho_patterning · ArF-i

0.217	274.5	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

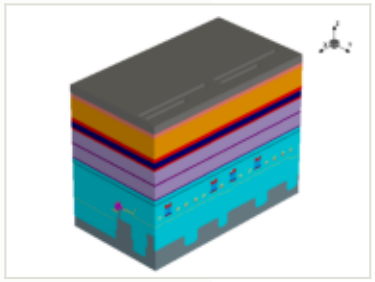

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

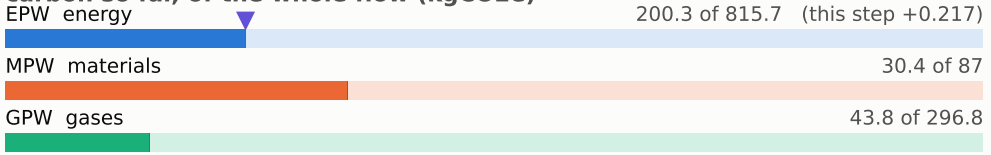

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

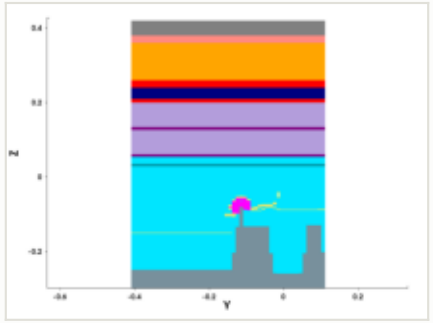

y cut at -0.150 µm

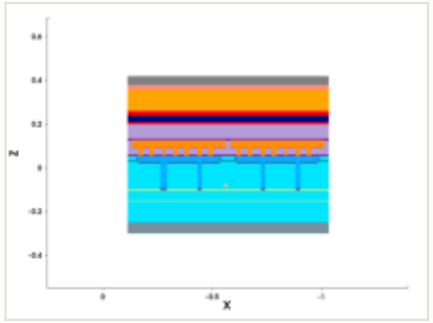

mask: layer 2020:0 (GDSII)

steps by process area

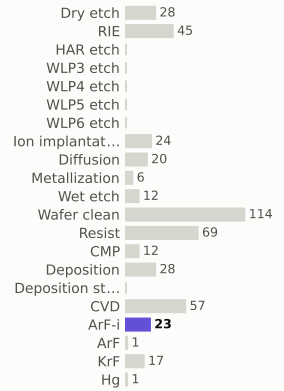

materials deposited (g)

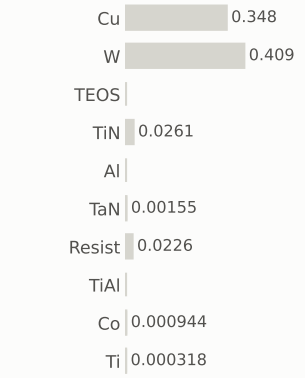

gases emitted (g)

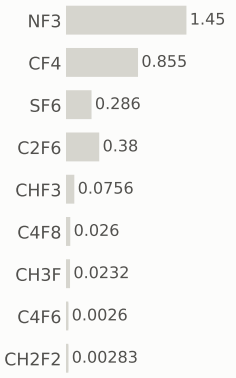

Step #6100: RIE

etch_anisotropic · RIE

1.04	275.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

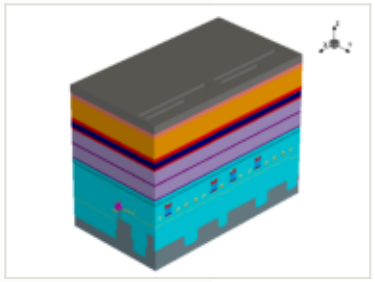

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

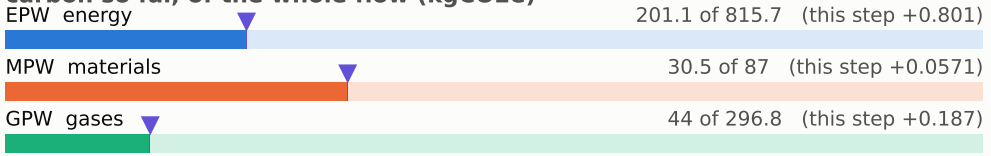

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

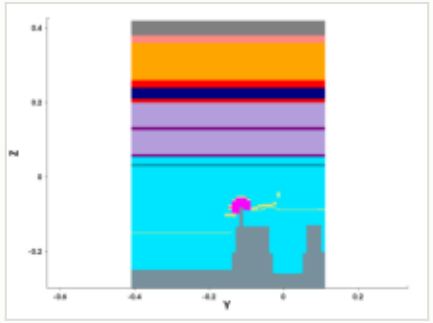

y cut at -0.150 µm

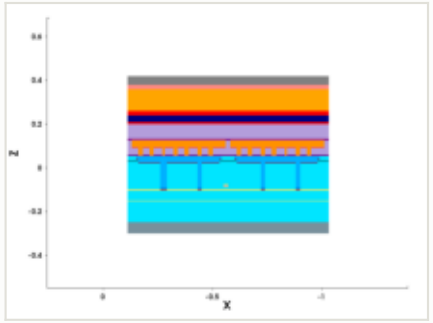

mask for this step

no mask for this step

steps by process area

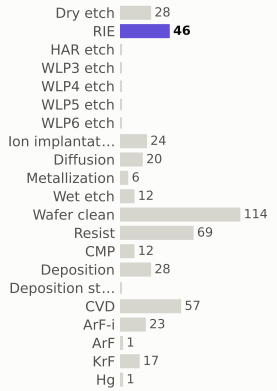

materials deposited (g)



gases emitted (g)

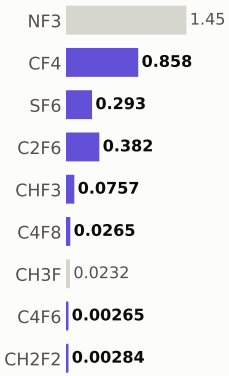

Step #6110: Wafer_clean

clean · Wafer_clean

0.169	275.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

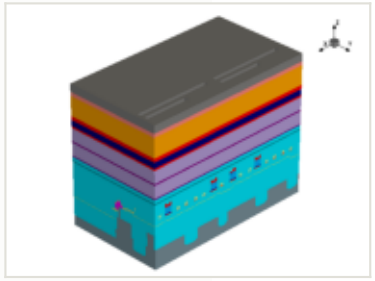

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

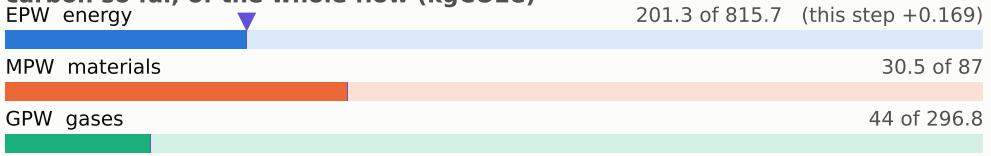

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

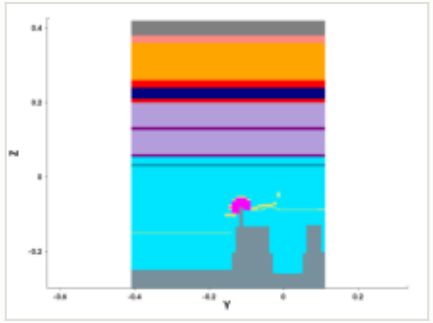

y cut at -0.150 µm

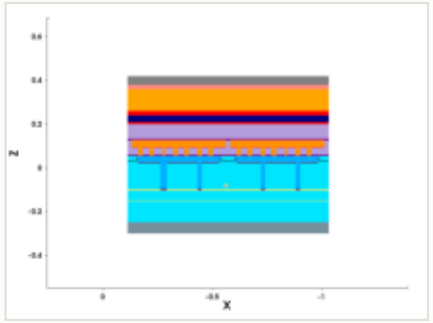

mask for this step

no mask for this step

steps by process area

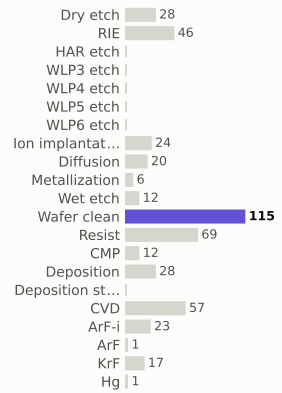

materials deposited (g)



gases emitted (g)

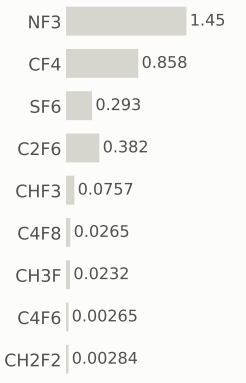

Step #6120: Resist

depo_fill · Resist

0.169	275.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

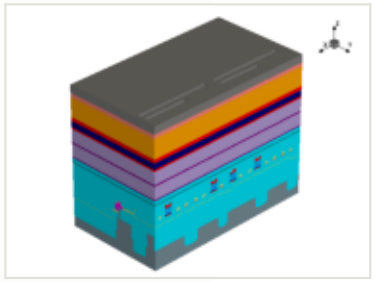

this step

process area	Resist
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

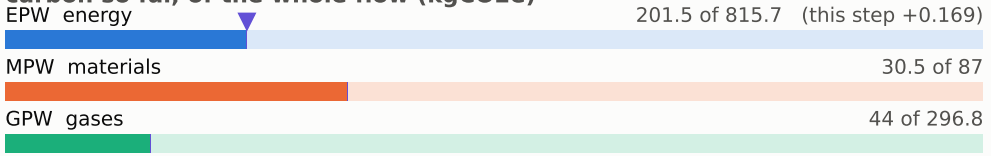

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

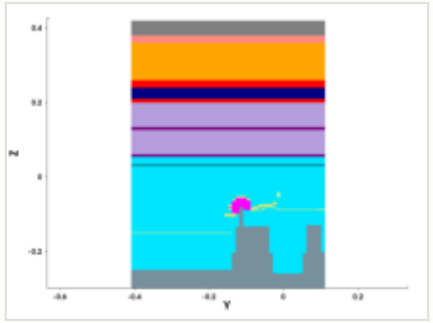

y cut at -0.150 µm

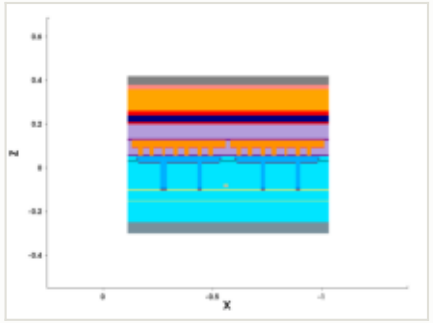

mask for this step

no mask for this step

steps by process area

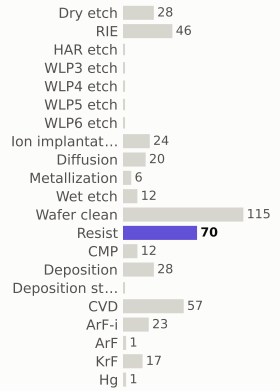

materials deposited (g)



gases emitted (g)

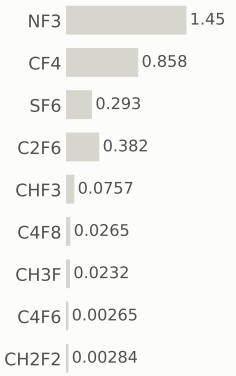

Step #6130: CVD

depo_isotropic · CVD

1.31	277.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

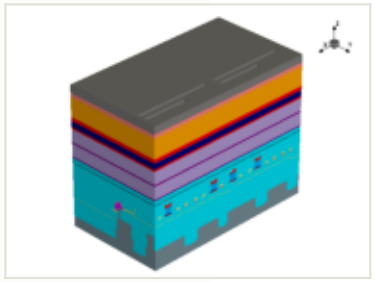

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

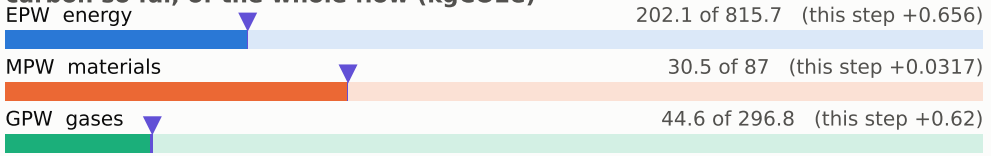

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

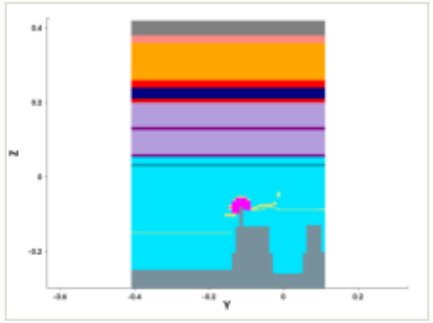

y cut at -0.150 µm

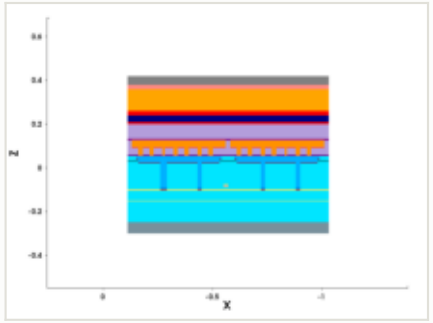

mask for this step

no mask for this step

steps by process area

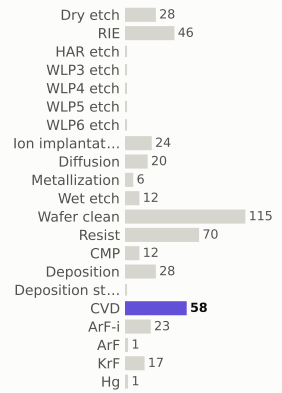

materials deposited (g)

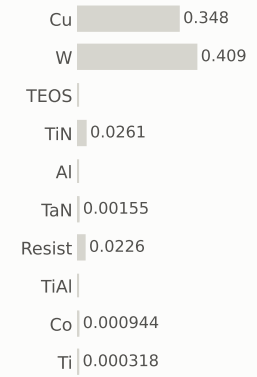

gases emitted (g)

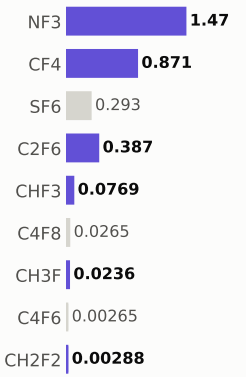

Step #6140: Wafer_clean

clean · Wafer_clean

0.169	277.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

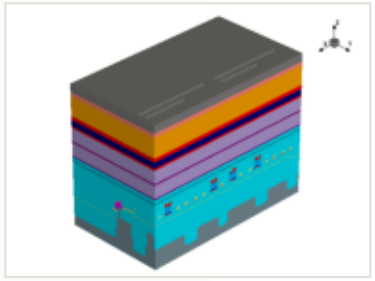

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

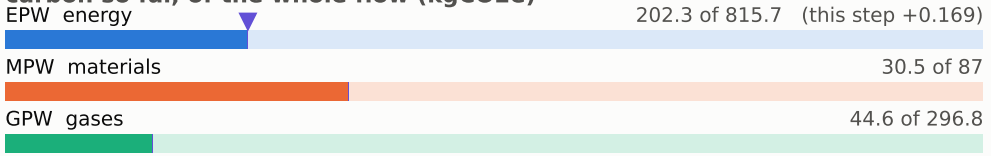

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

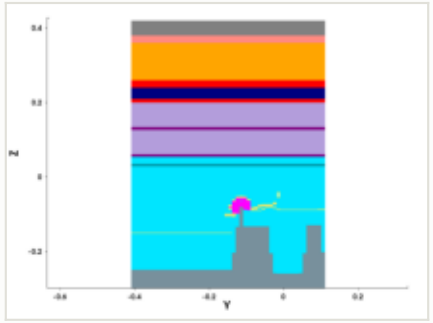

y cut at -0.150 µm

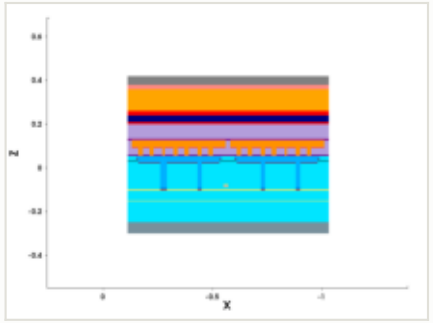

mask for this step

no mask for this step

steps by process area

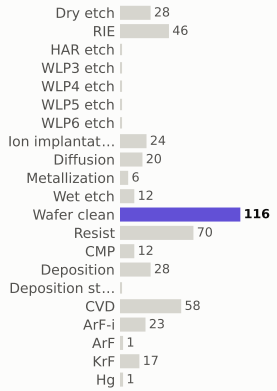

materials deposited (g)

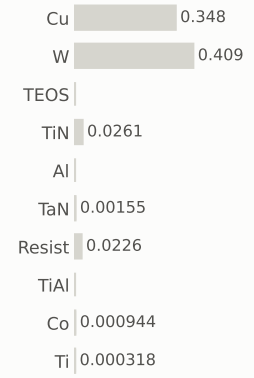

gases emitted (g)

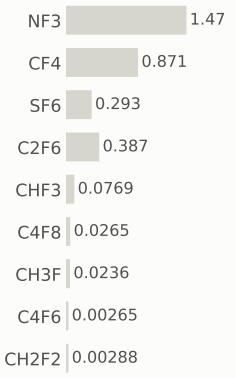

Step #6150: Resist

resist · Resist

0.169	277.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

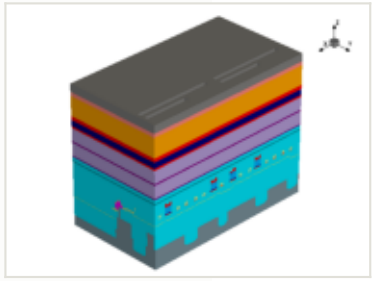

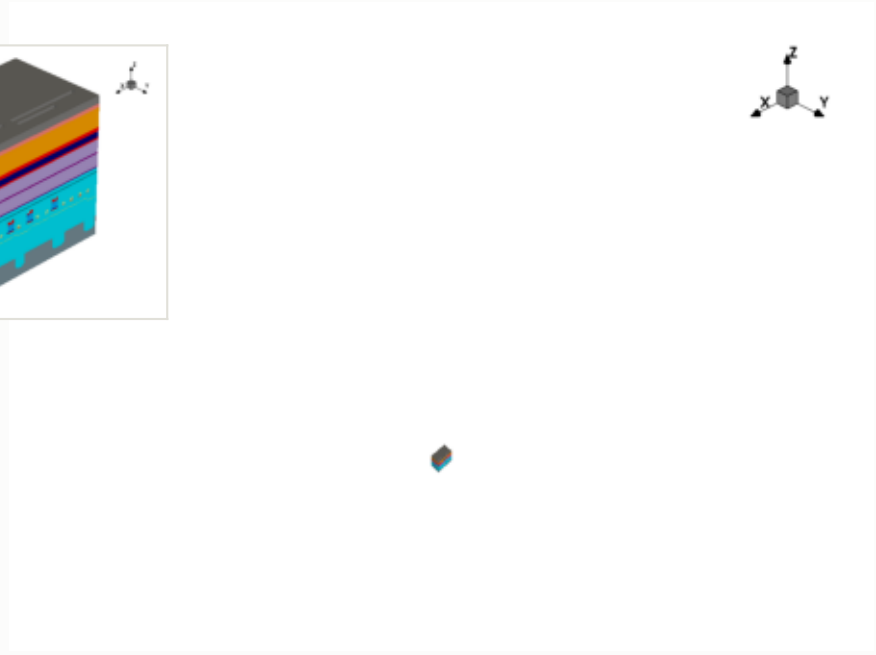

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

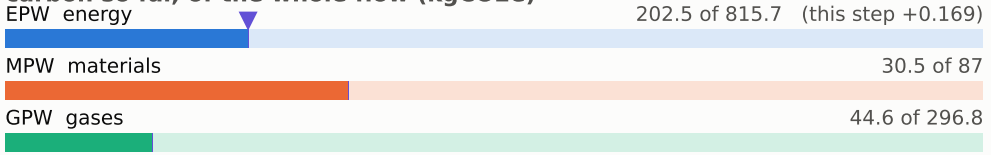

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

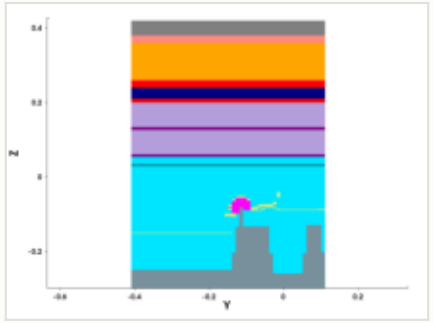

y cut at -0.150 µm

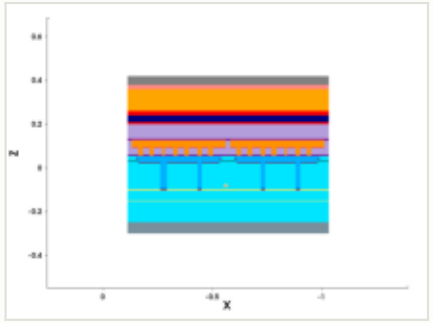

mask for this step

no mask for this step

steps by process area

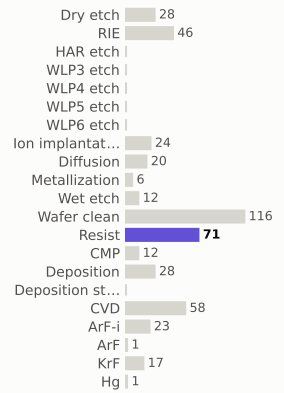

materials deposited (g)

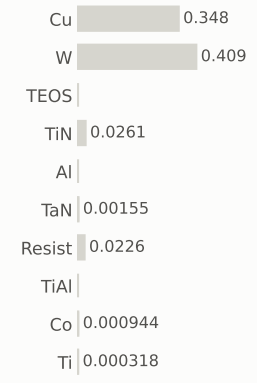

gases emitted (g)

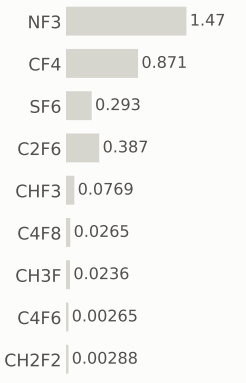

Step #6160: ArF-i

litho_patterning · ArF-i

0.217	277.8	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

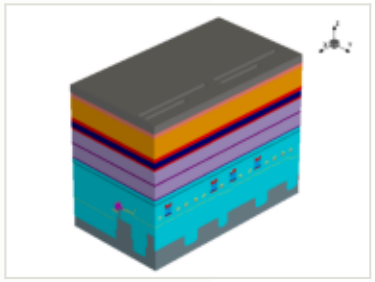

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

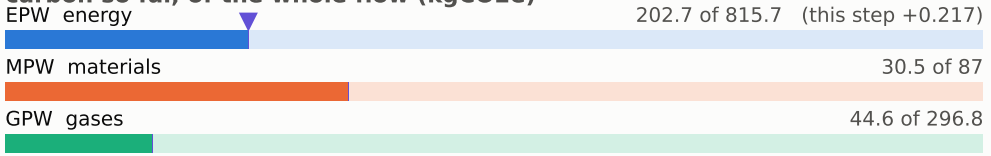

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

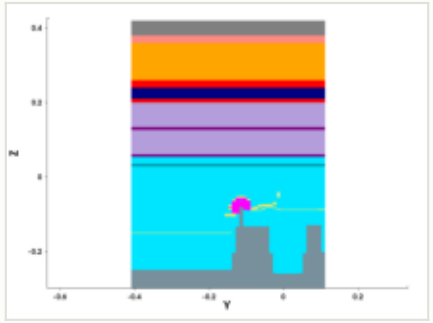

y cut at -0.150 µm

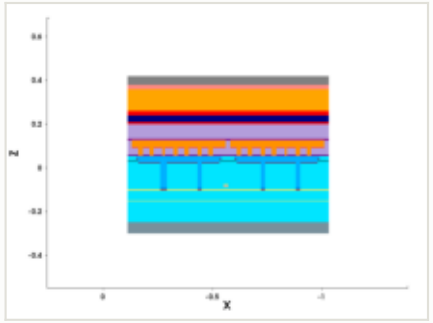

mask: layer 2100:0, positive (GDSII)

steps by process area

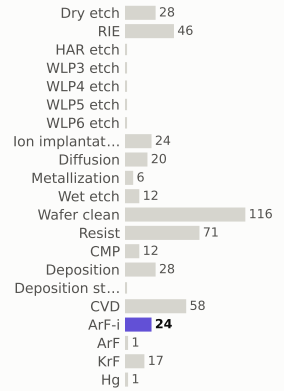

materials deposited (g)

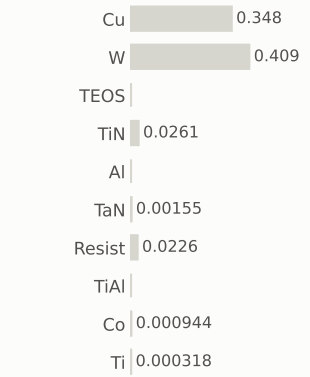

gases emitted (g)

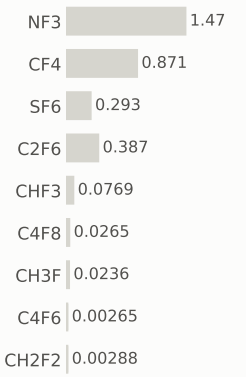

Step #6170: RIE

etch_strip · RIE

1.04	278.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

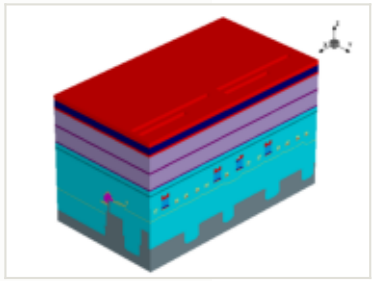

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

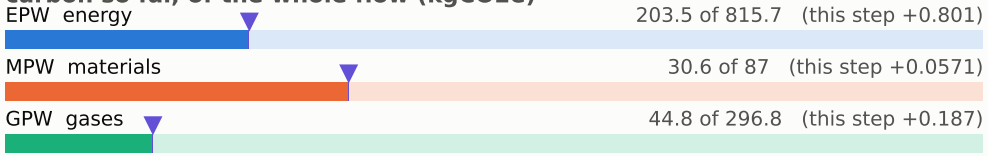

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

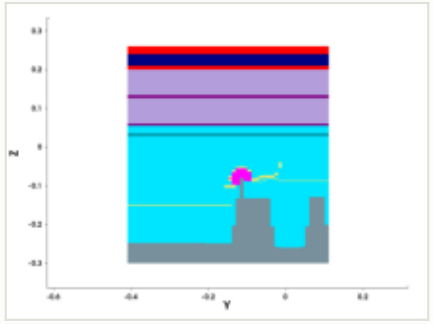

y cut at -0.150 µm

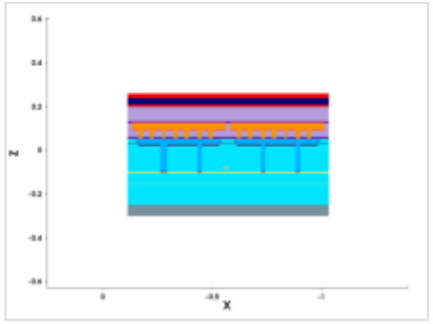

mask for this step

no mask for this step

steps by process area

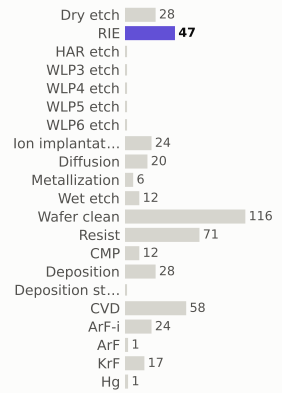

materials deposited (g)

gases emitted (g)

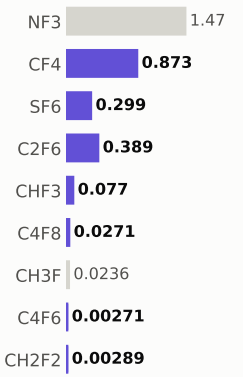

Step #6180: Wafer_clean

clean · Wafer_clean

0.169	279.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

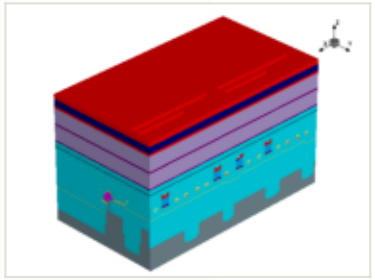

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

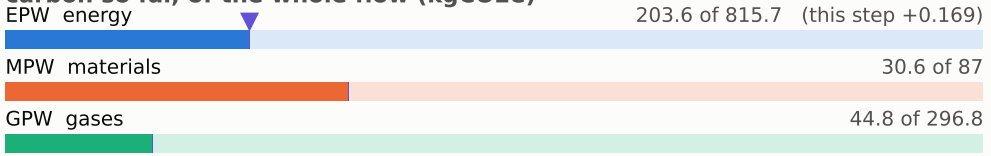

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

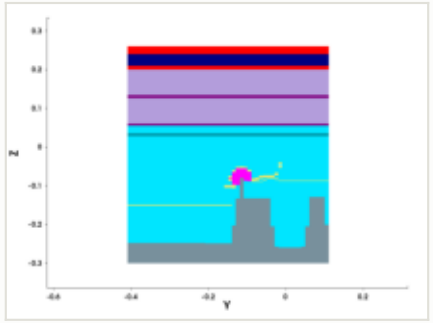

y cut at -0.150 µm

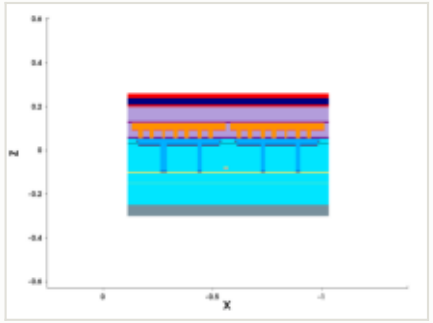

mask for this step

no mask for this step

steps by process area

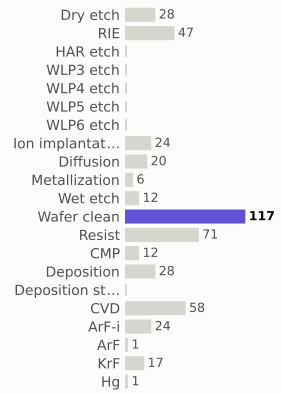

materials deposited (g)

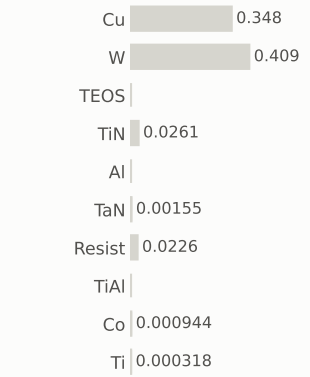

gases emitted (g)

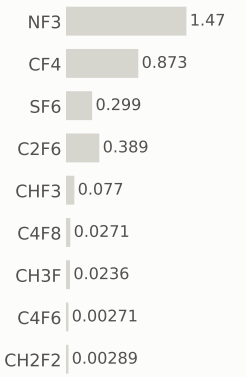

Step #6190: Resist

depo_fill · Resist

0.169	279.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

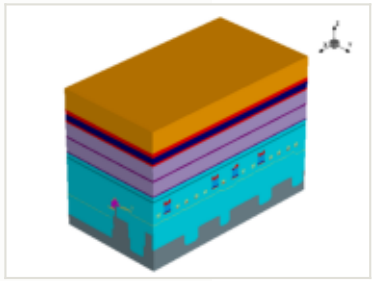

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

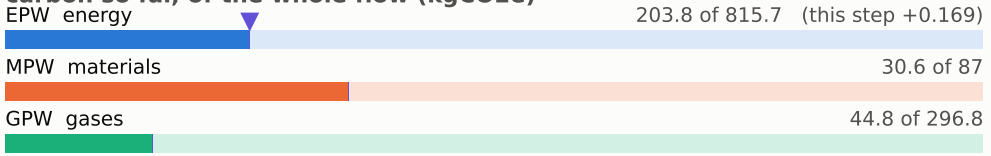

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

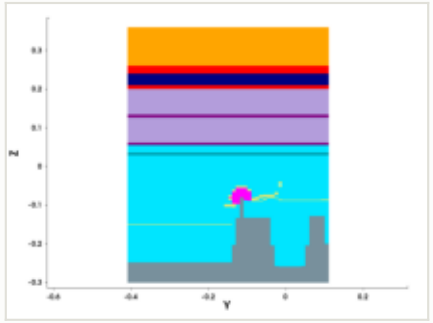

y cut at -0.150 µm

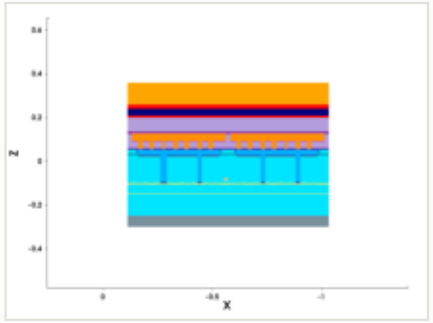

mask for this step

no mask for this step

steps by process area

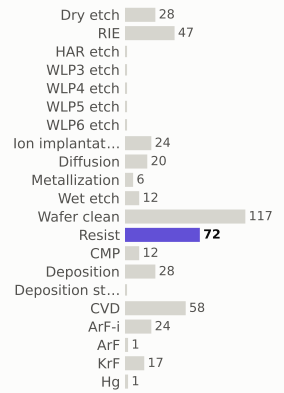

materials deposited (g)

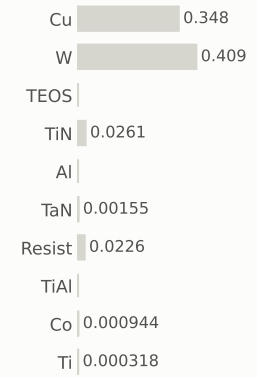

gases emitted (g)

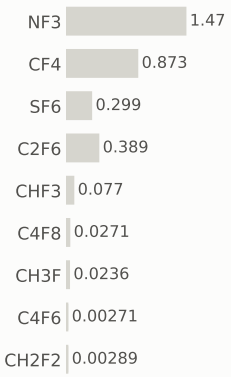

Step #6200: Deposition

depo_isotropic · Deposition

0.656	279.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

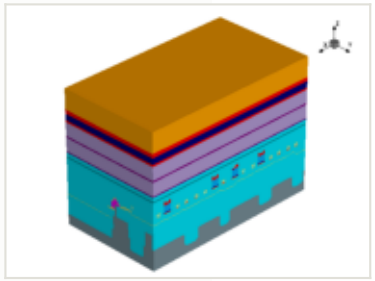

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

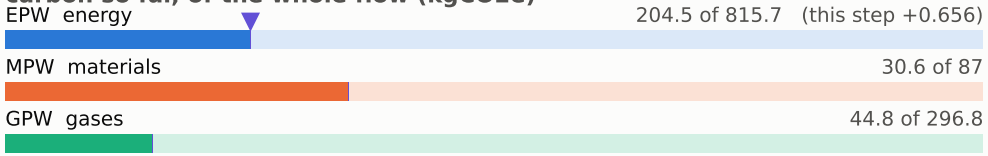

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

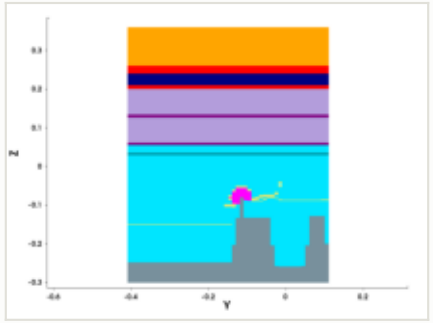

y cut at -0.150 µm

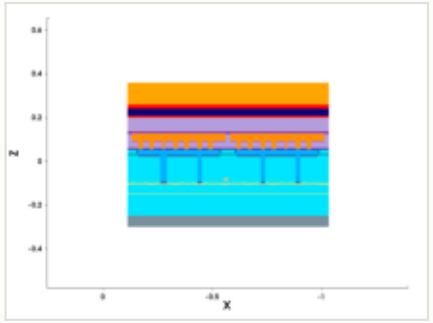

mask for this step

no mask for this step

steps by process area

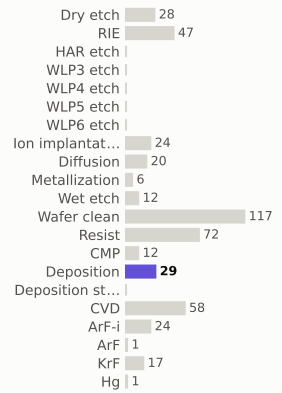

materials deposited (g)

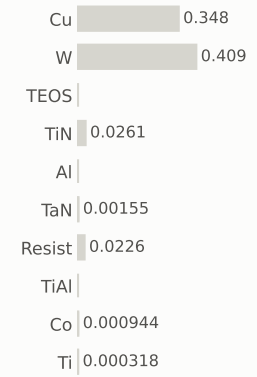

gases emitted (g)

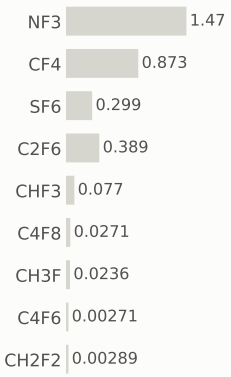

Step #6210: CVD

depo_isotropic · CVD

1.31	281.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

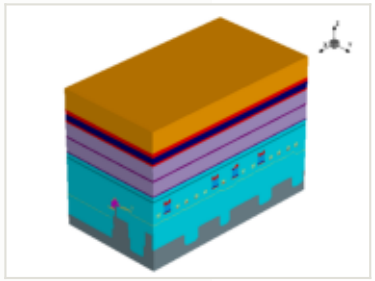

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

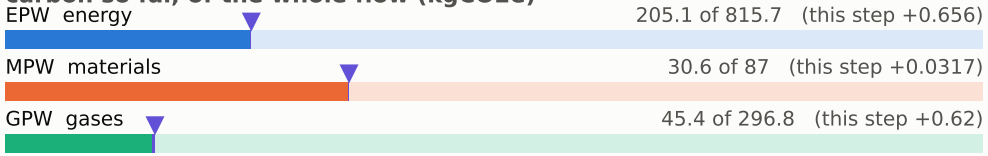

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

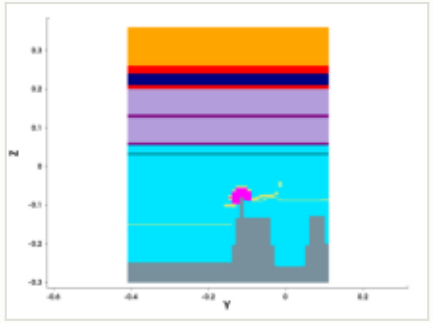

y cut at -0.150 µm

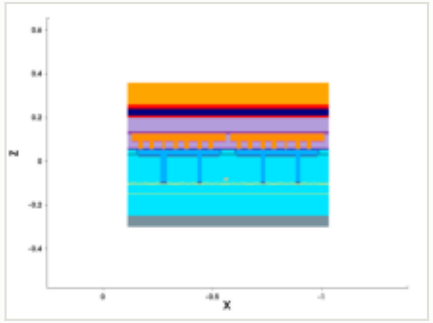

mask for this step

no mask for this step

steps by process area

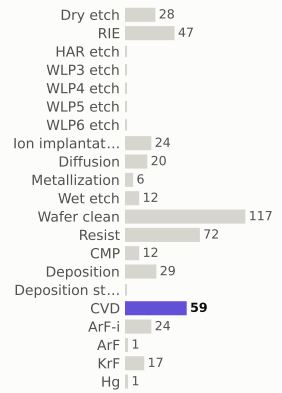

materials deposited (g)

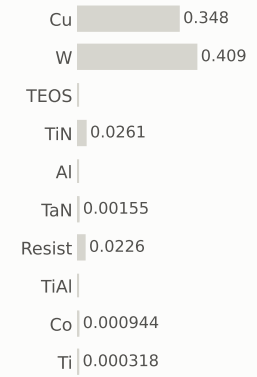

gases emitted (g)



Step #6220: Resist

depo_fill · Resist

0.169	281.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

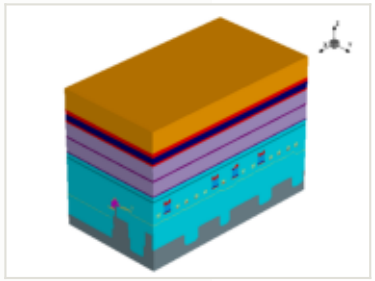

this step

process area	Resist
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

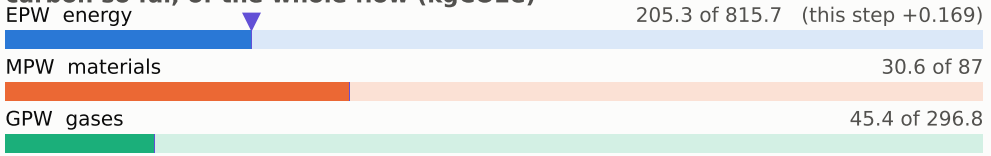

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

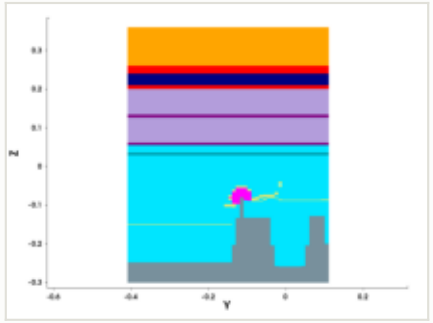

y cut at -0.150 µm

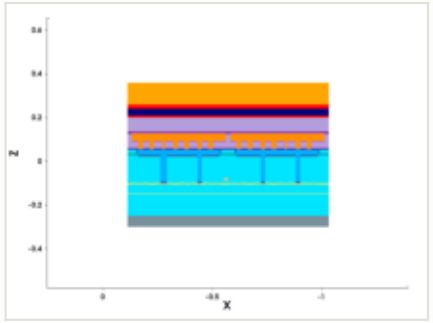

mask for this step

no mask for this step

steps by process area

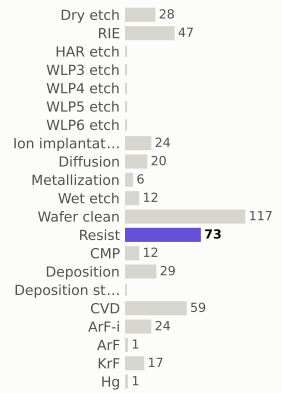

materials deposited (g)

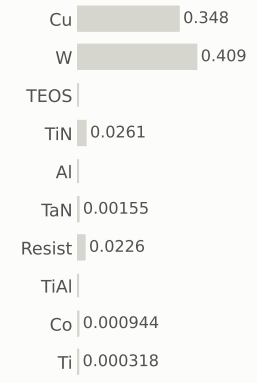

gases emitted (g)

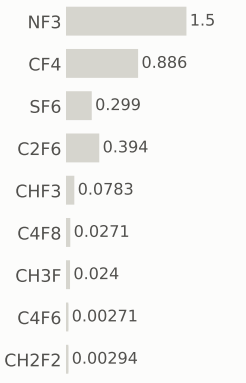

Step #6230: CVD

depo_fill · CVD

1.31	282.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

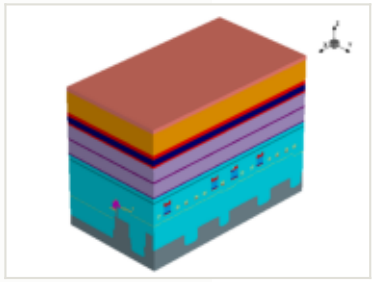

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

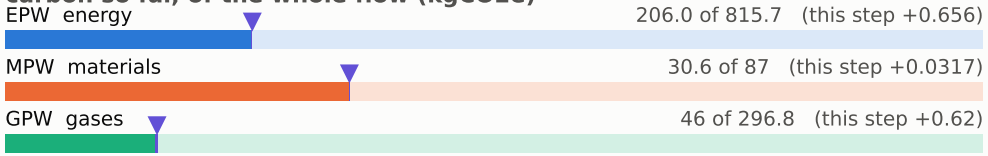

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

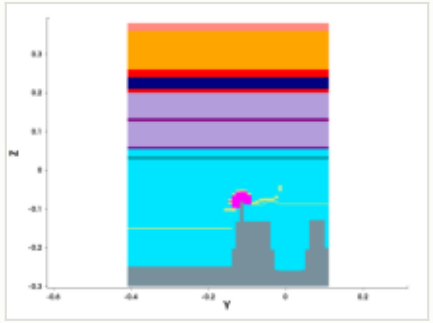

y cut at -0.150 µm

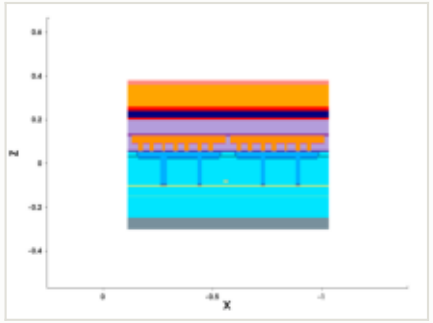

mask for this step

no mask for this step

steps by process area

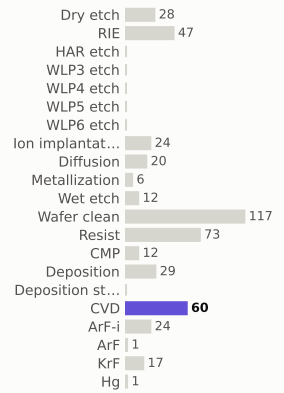

materials deposited (g)

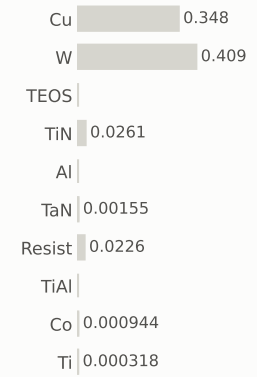

gases emitted (g)

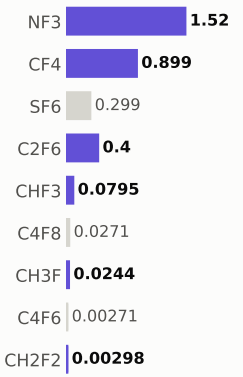

Step #6240: Wafer_clean

clean · Wafer_clean

0.169	282.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

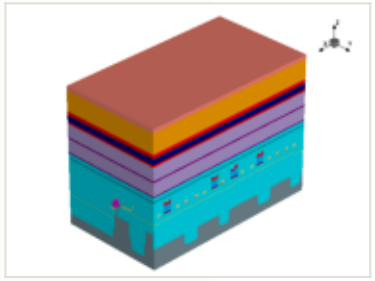

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

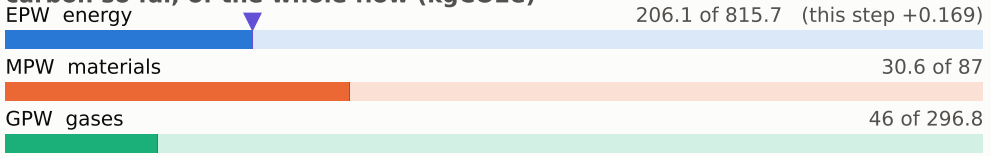

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

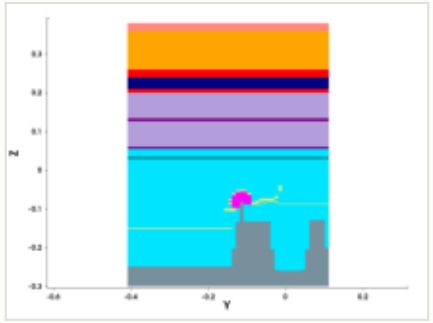

y cut at -0.150 µm

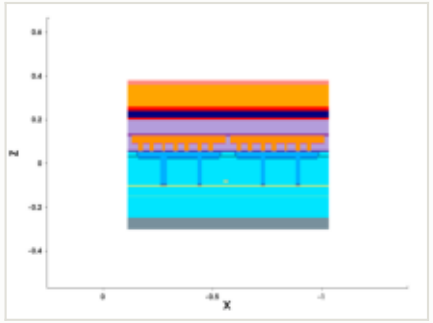

mask for this step

no mask for this step

steps by process area

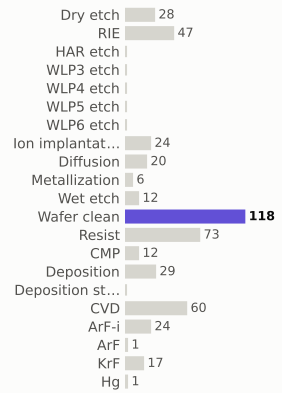

materials deposited (g)



gases emitted (g)

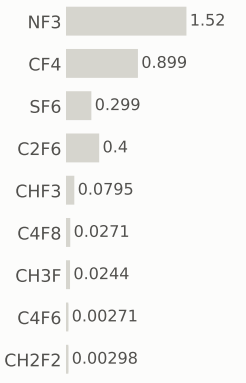

Step #6250: Resist

resist · Resist

0.169	282.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

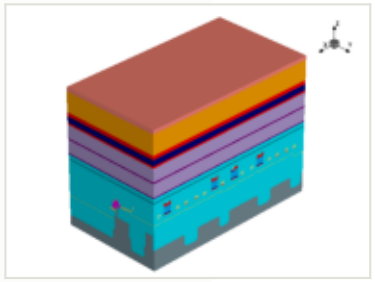

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

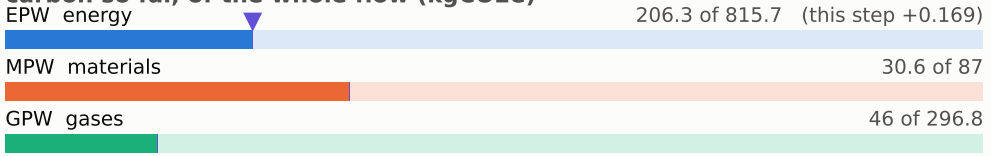

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

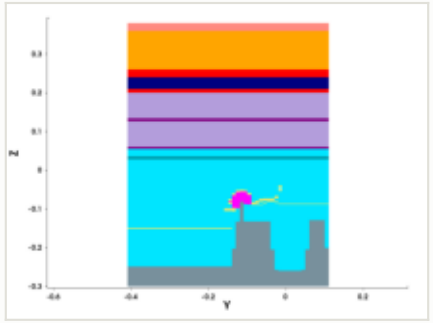

y cut at -0.150 µm

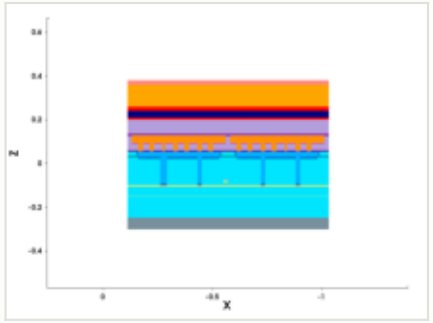

mask for this step

no mask for this step

steps by process area

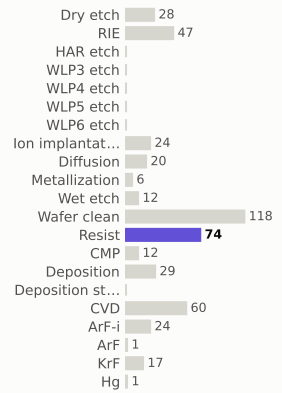

materials deposited (g)

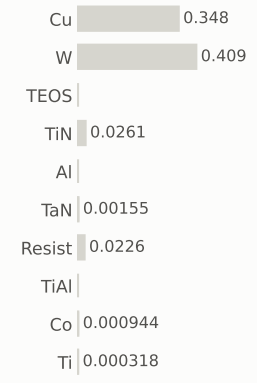

gases emitted (g)

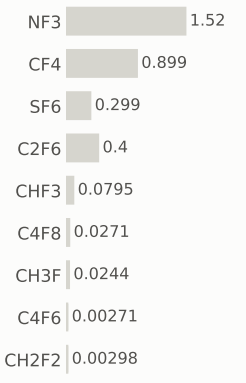

Step #6260: ArF-i

litho_patterning · ArF-i

0.217	283.1	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

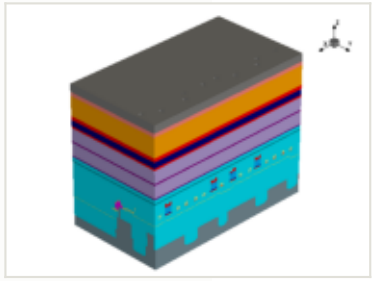

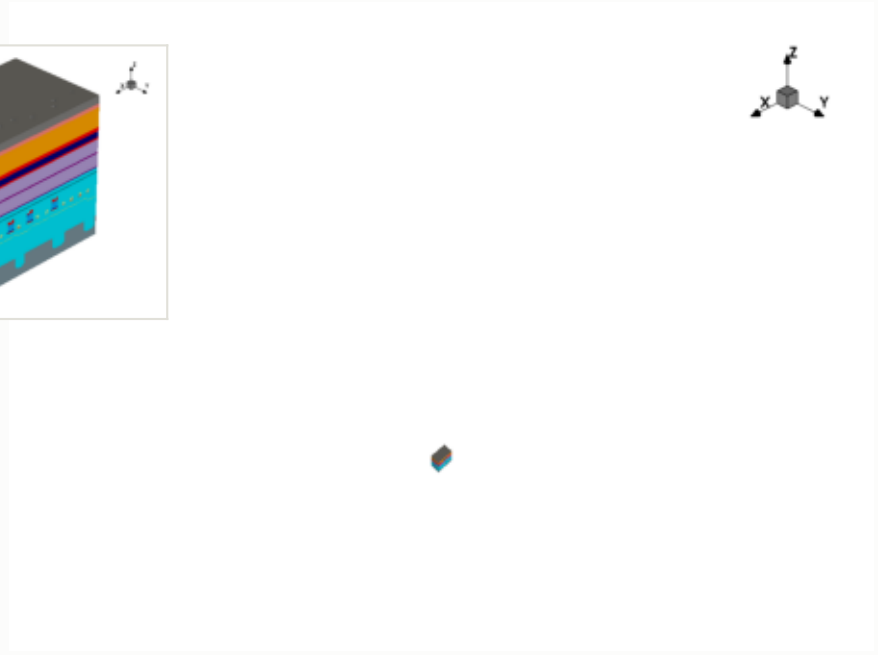

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

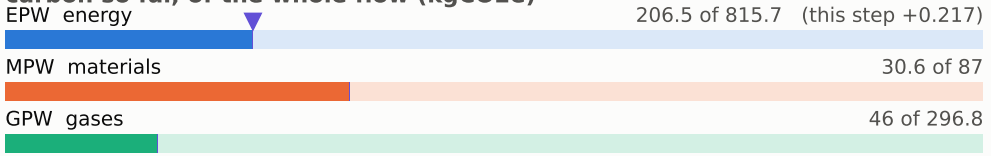

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

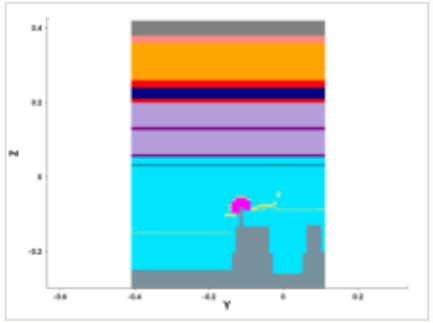

y cut at -0.150 µm

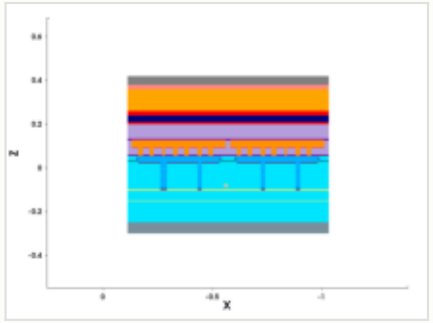

mask: layer 2021:0 (GDSII)



steps by process area

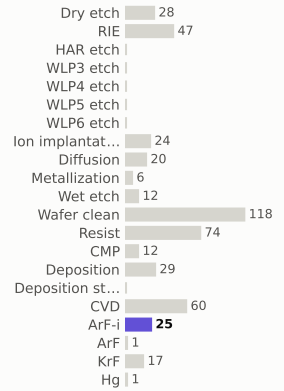

materials deposited (g)

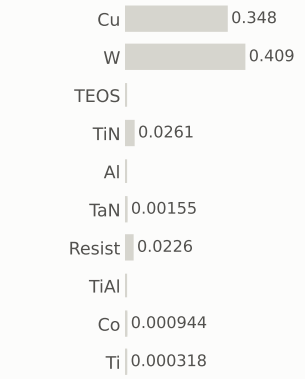

gases emitted (g)

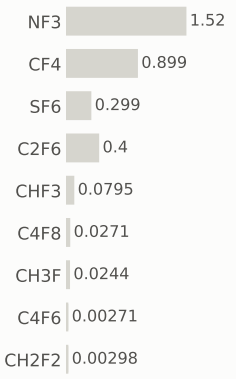

Step #6270: RIE

etch_anisotropic · RIE

1.04	284.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

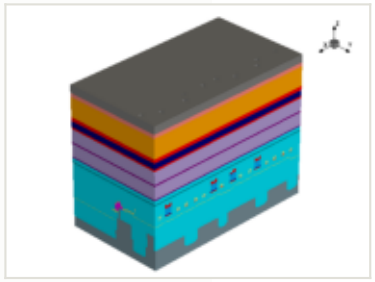

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

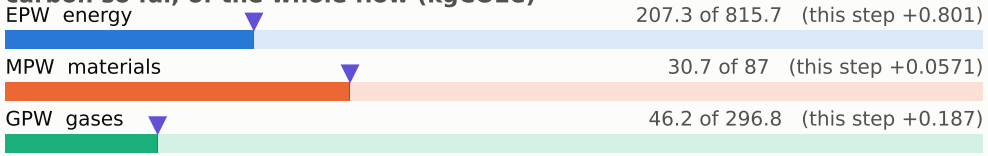

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

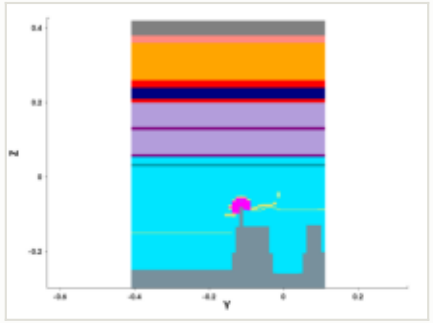

y cut at -0.150 µm

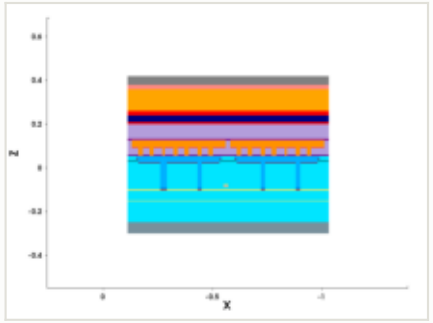

mask for this step

no mask for this step

steps by process area

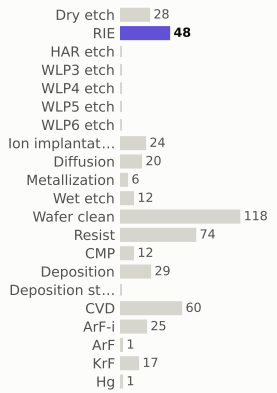

materials deposited (g)

gases emitted (g)

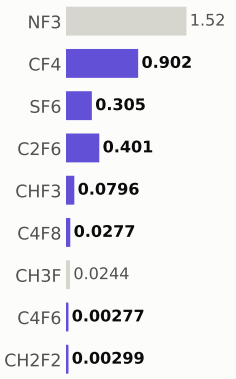

Step #6280: Wafer_clean

clean · Wafer_clean

0.169	284.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

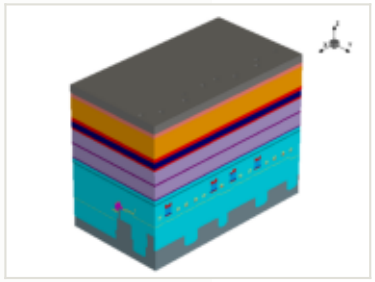

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

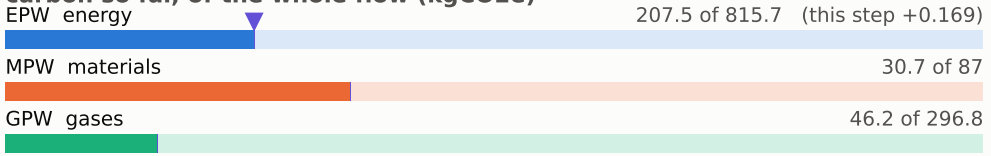

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

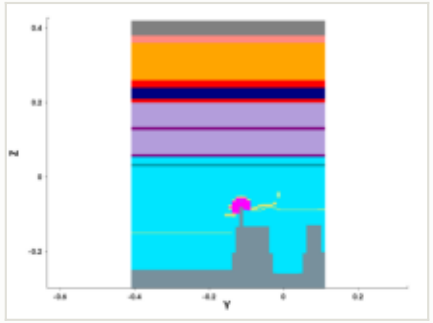

y cut at -0.150 µm

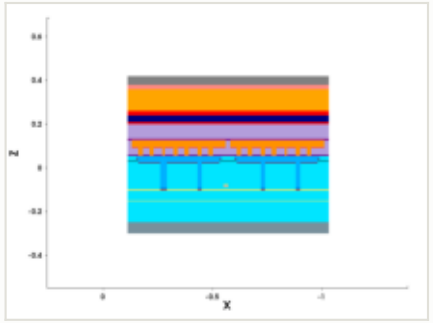

mask for this step

no mask for this step

steps by process area

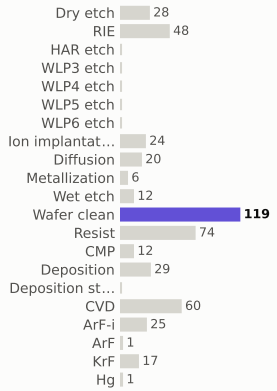

materials deposited (g)

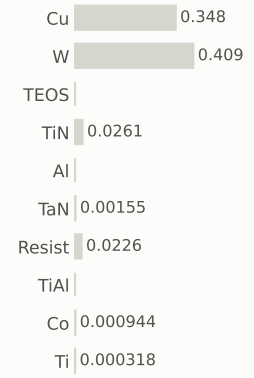

gases emitted (g)

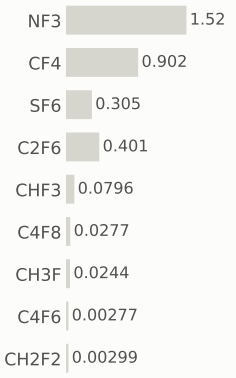

Step #6290: Resist

depo_fill · Resist

0.169	284.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

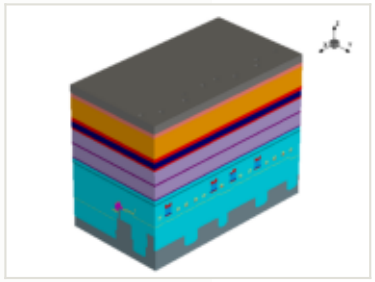

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

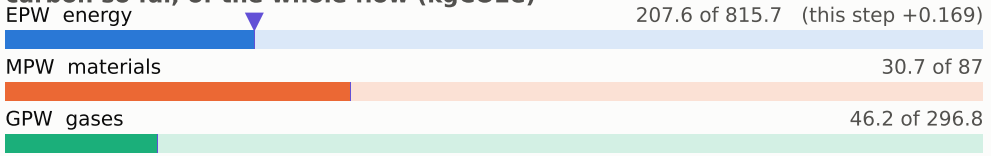

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

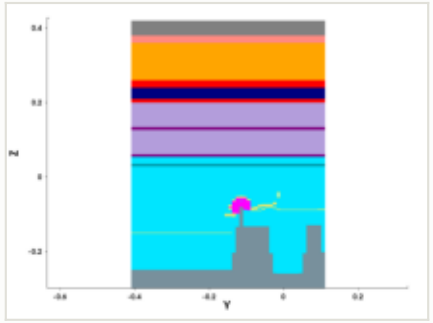

y cut at -0.150 µm

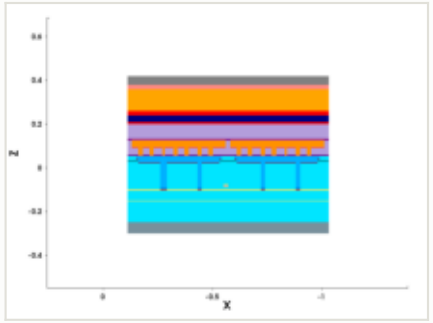

mask for this step

no mask for this step

steps by process area

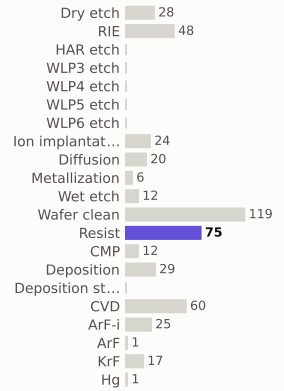

materials deposited (g)

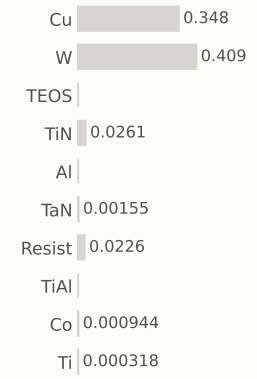

gases emitted (g)

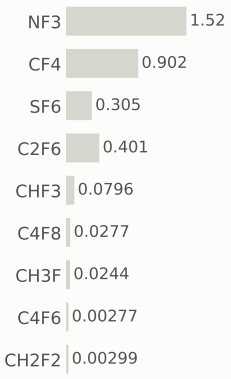

Step #6300: CVD

depo_isotropic · CVD

1.31	285.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

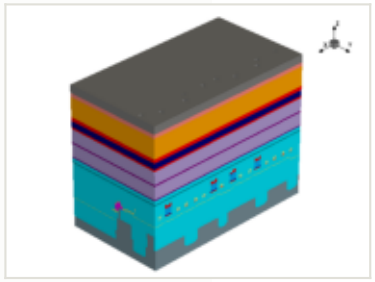

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

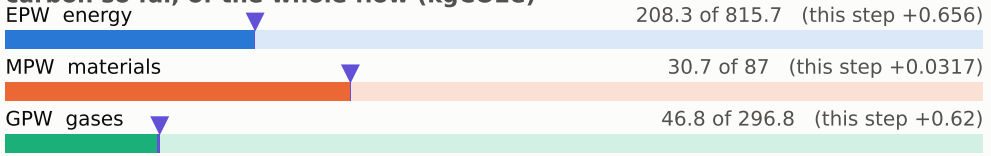

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

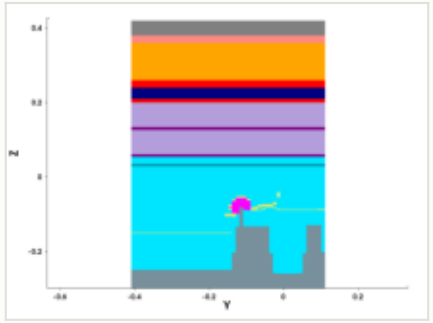

y cut at -0.150 µm

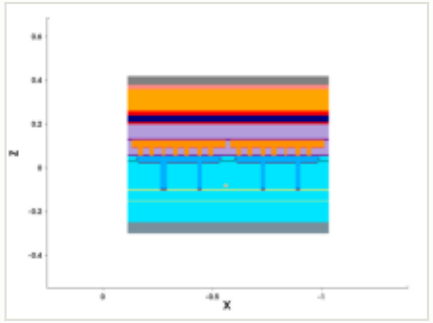

mask for this step

no mask for this step

steps by process area

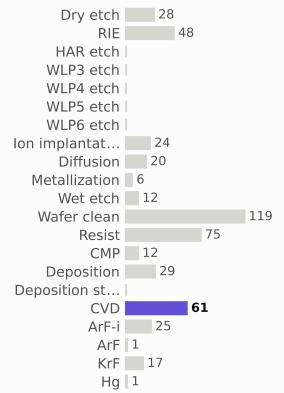

materials deposited (g)

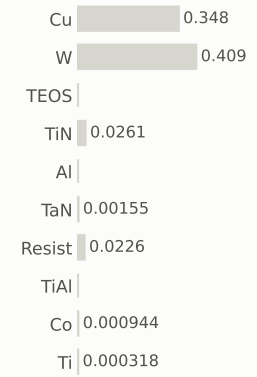

gases emitted (g)

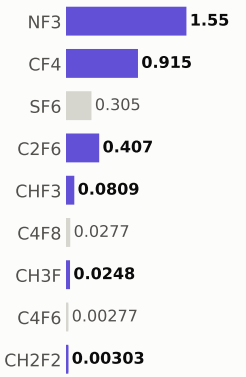

Step #6310: Wafer_clean

clean · Wafer_clean

0.169	286.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

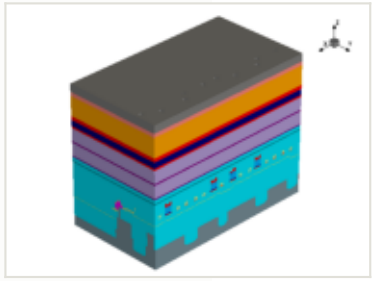

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

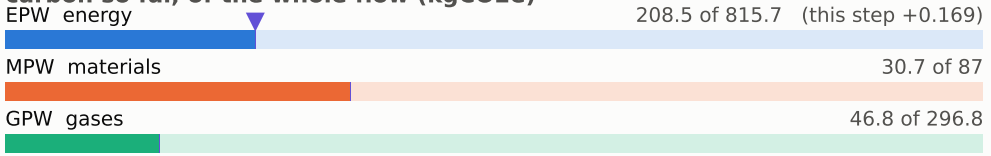

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

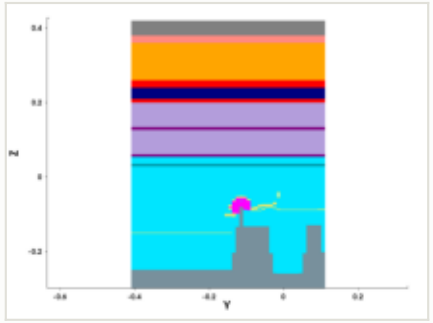

y cut at -0.150 µm

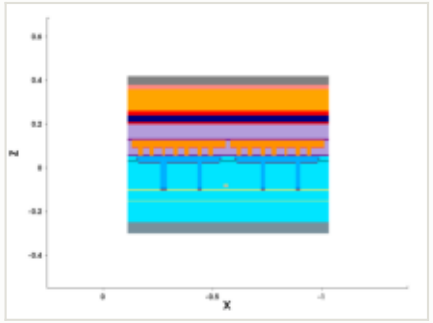

mask for this step

no mask for this step

steps by process area

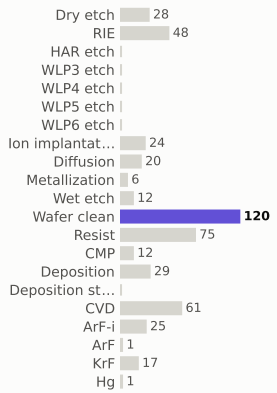

materials deposited (g)

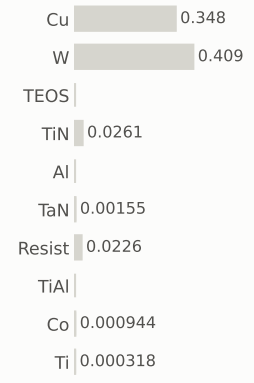

gases emitted (g)

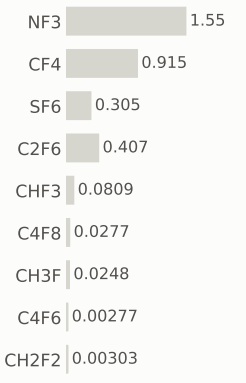

Step #6320: Resist

resist · Resist

0.169	286.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

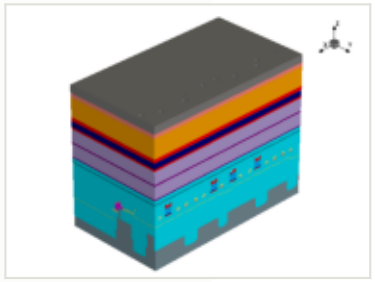

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

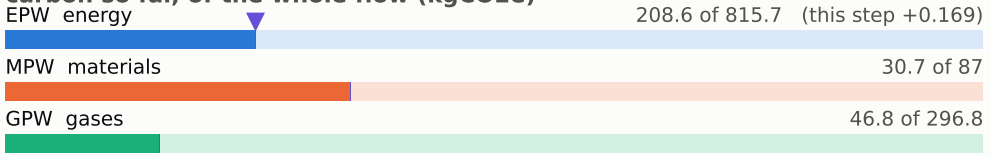

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

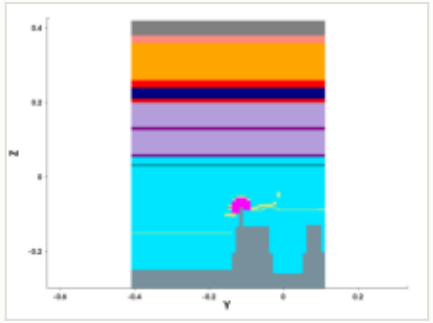

y cut at -0.150 µm

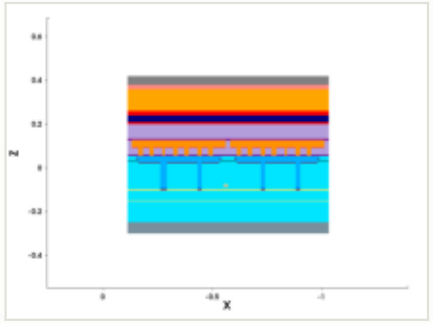

mask for this step

no mask for this step

steps by process area

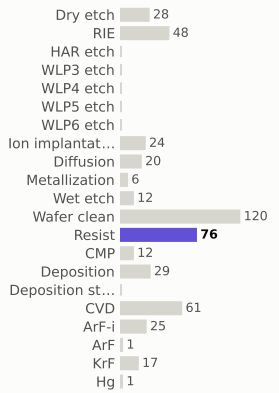

materials deposited (g)

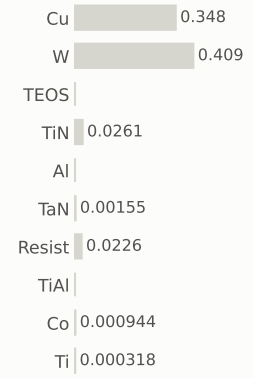

gases emitted (g)

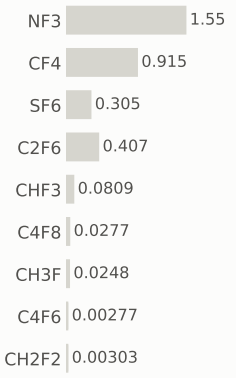

Step #6330: ArF-i

litho_patterning · ArF-i

0.217	286.4	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

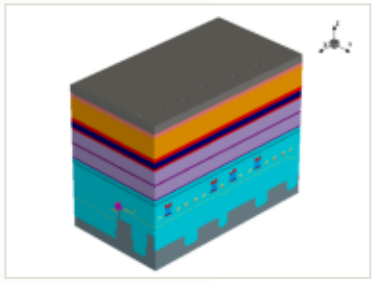

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

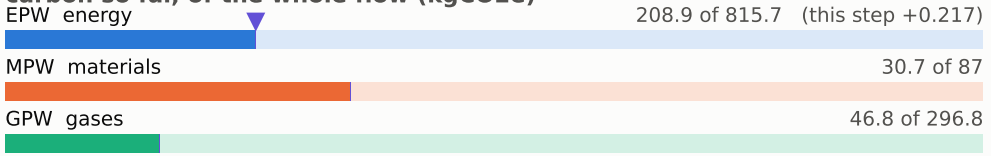

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

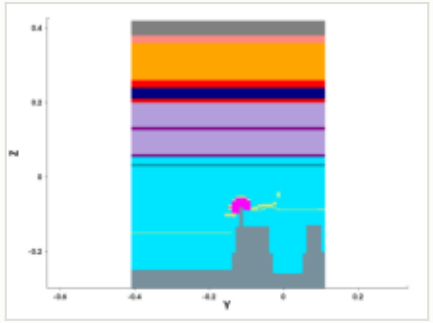

y cut at -0.150 µm

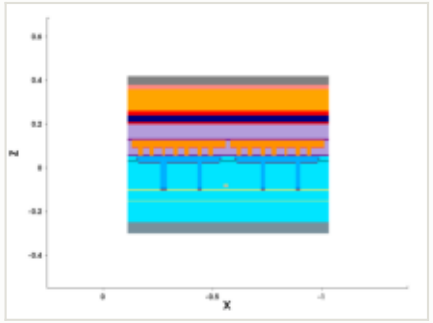

mask: layer 2100:0, positive (GDSII)

steps by process area

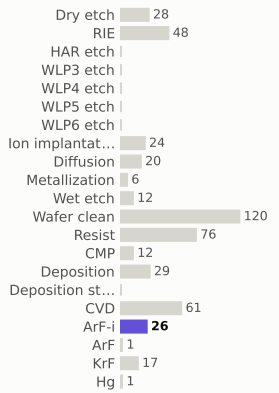

materials deposited (g)

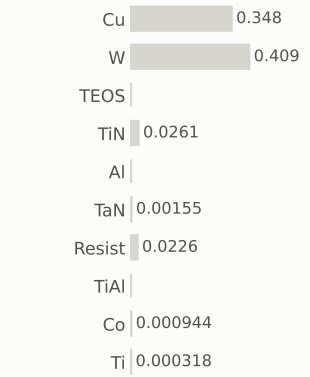

gases emitted (g)

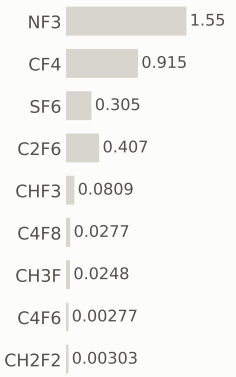

Step #6340: RIE

etch_strip · RIE

1.04	287.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

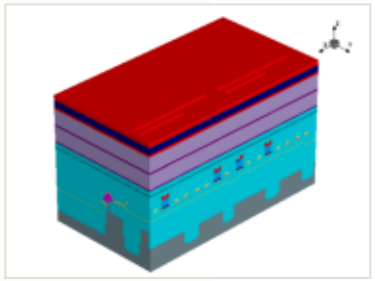

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

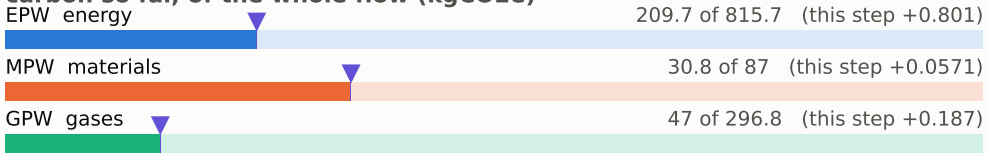

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

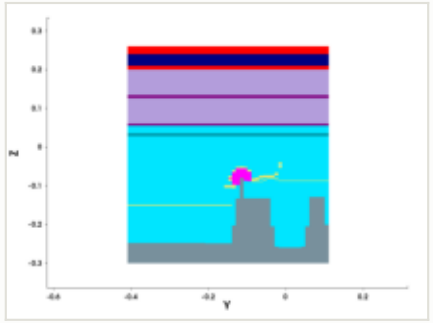

y cut at -0.150 µm

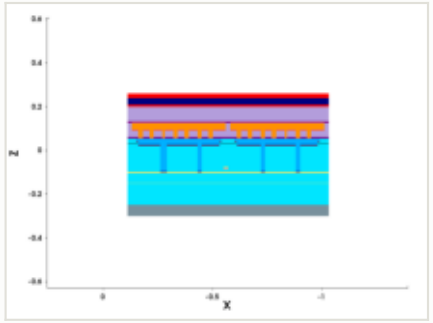

mask for this step

no mask for this step

steps by process area

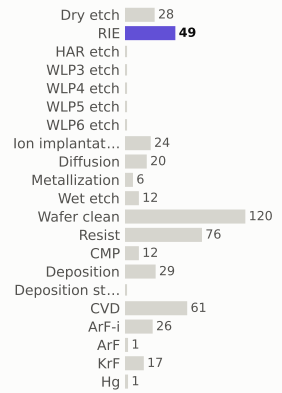

materials deposited (g)

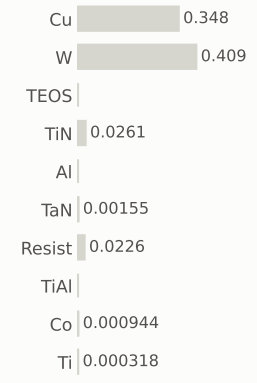

gases emitted (g)

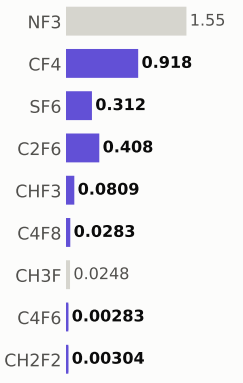

Step #6350: Wafer_clean

clean · Wafer_clean

0.169	287.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

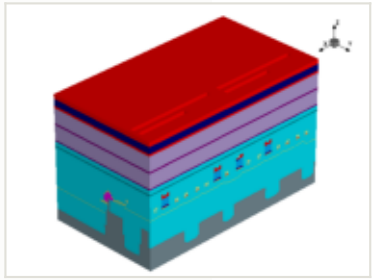

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

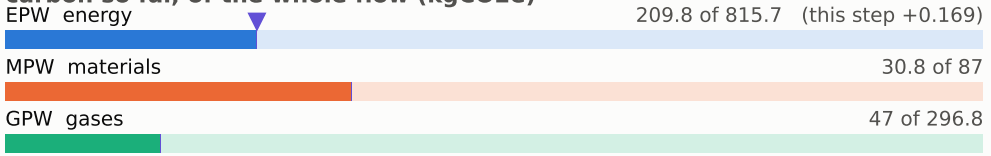

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

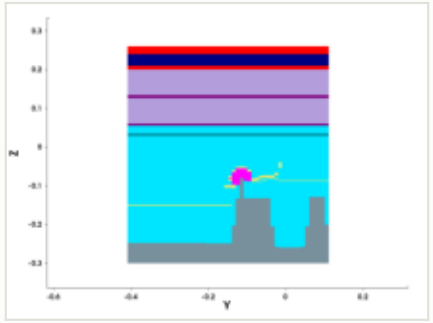

y cut at -0.150 µm

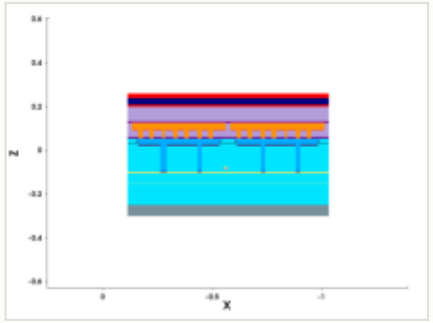

mask for this step

no mask for this step

steps by process area

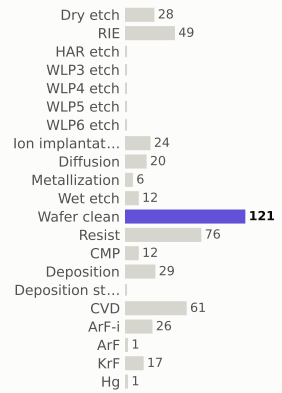

materials deposited (g)



gases emitted (g)

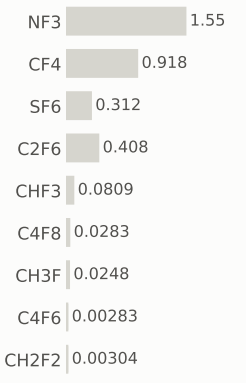

Step #6360: RIE

etch_anisotropic · RIE

1.04	288.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

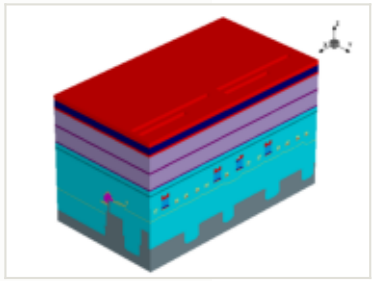

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

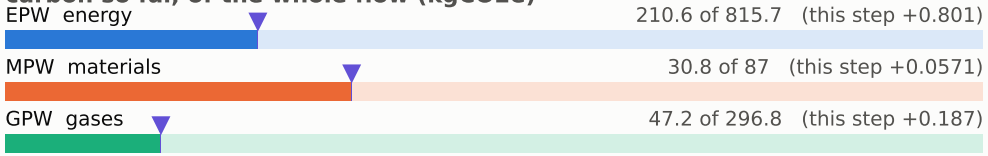

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

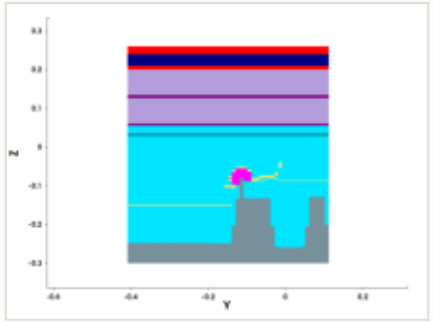

y cut at -0.150 µm

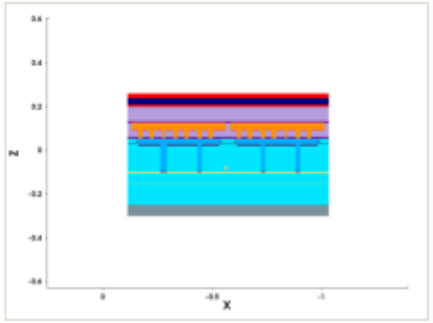

mask for this step

no mask for this step

steps by process area

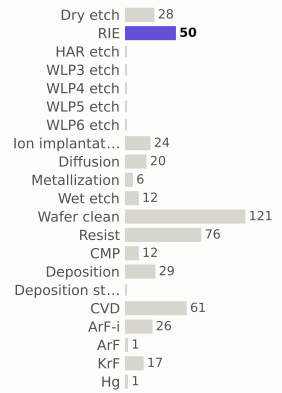

materials deposited (g)

gases emitted (g)

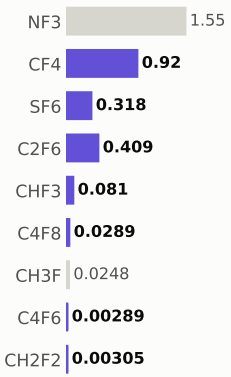

Step #6370: Wafer_clean

clean · Wafer_clean

0.169	288.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

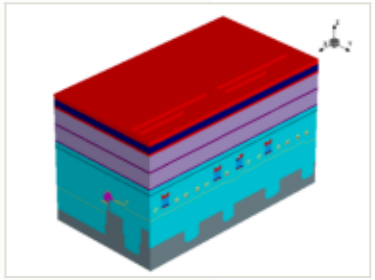

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

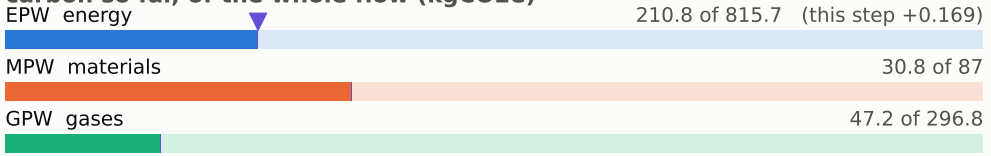

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

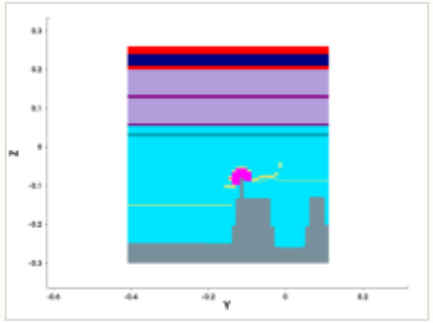

y cut at -0.150 µm

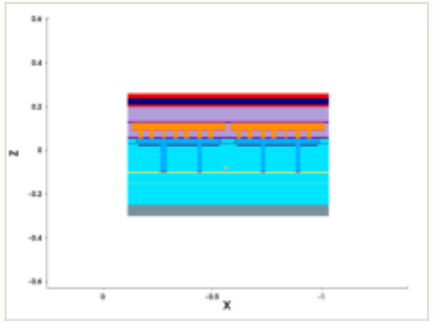

mask for this step

no mask for this step

steps by process area

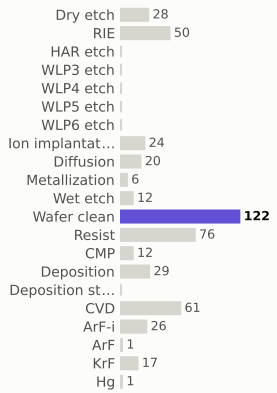

materials deposited (g)

gases emitted (g)

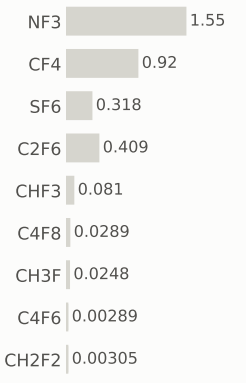

Step #6380: Metallization

depo_ellipsoidal · Metallization

1.2	290.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

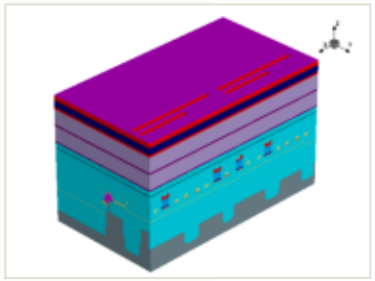

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

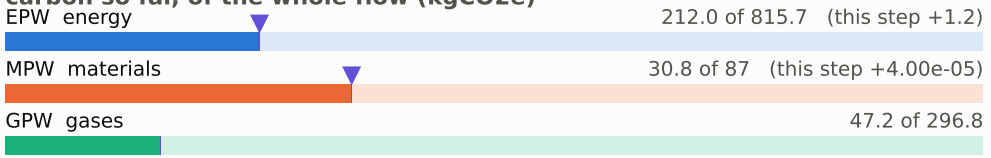

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

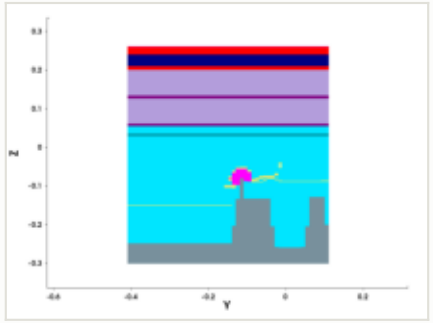

y cut at -0.150 µm

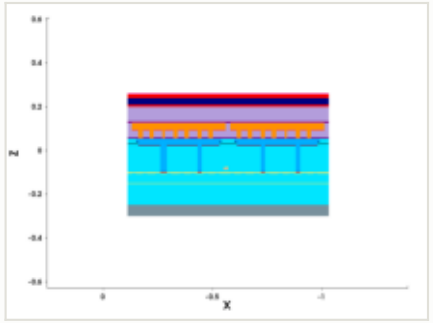

mask for this step

no mask for this step

steps by process area

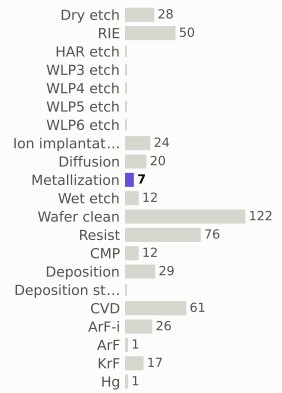

materials deposited (g)

gases emitted (g)

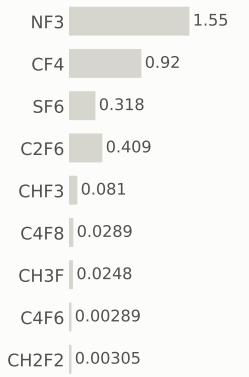

Step #6390: Metallization

depo_fill · Metallization

1.21	291.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

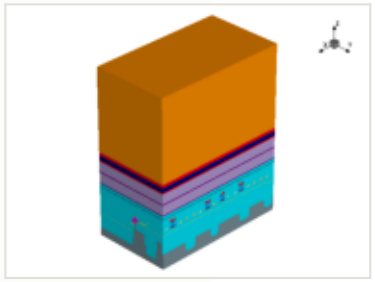

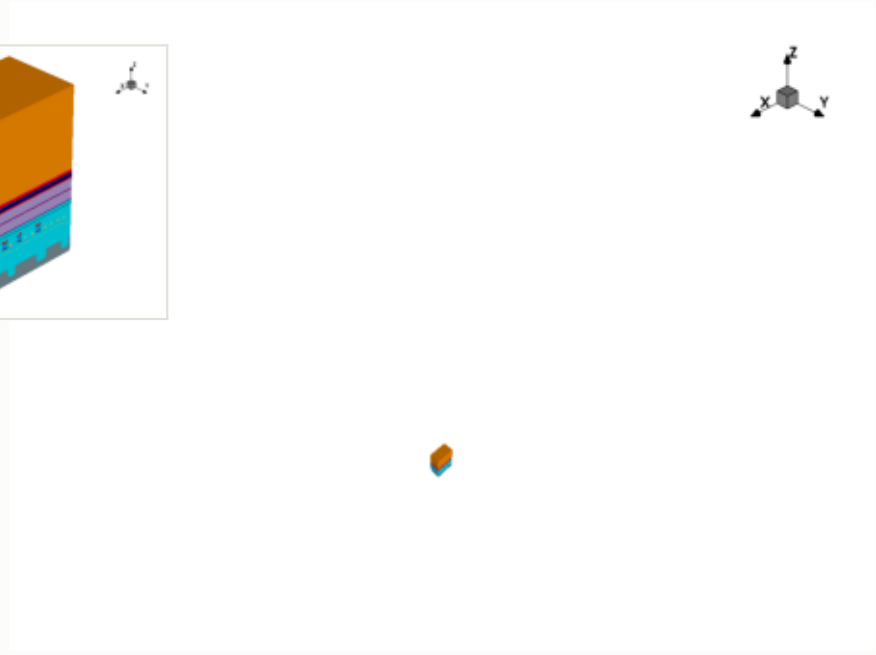

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

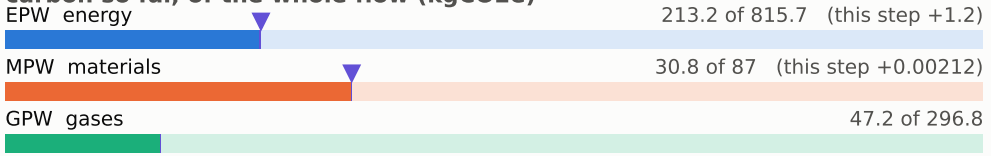

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

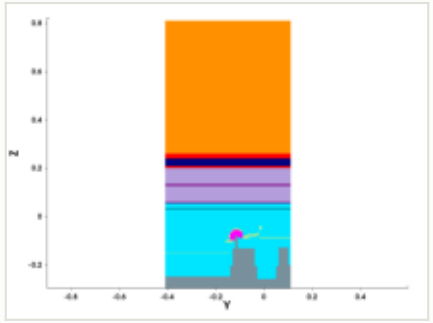

y cut at -0.150 µm

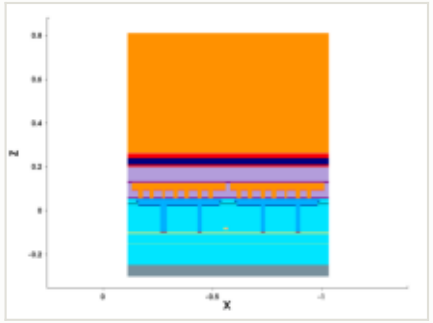

mask for this step

no mask for this step

steps by process area

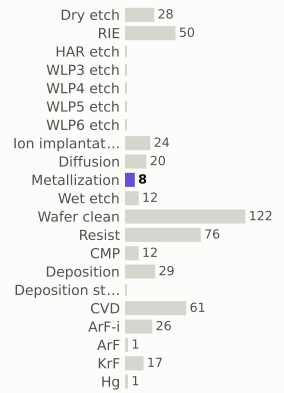

materials deposited (g)

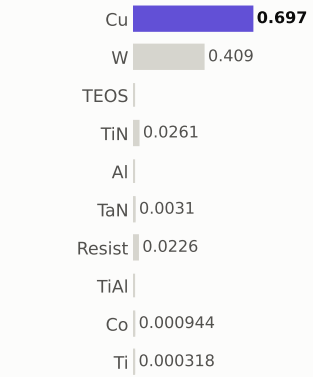

gases emitted (g)

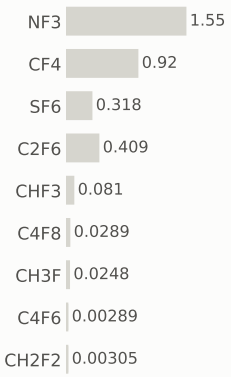

Step #6400: Diffusion

anneal · Diffusion

0.801	292.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

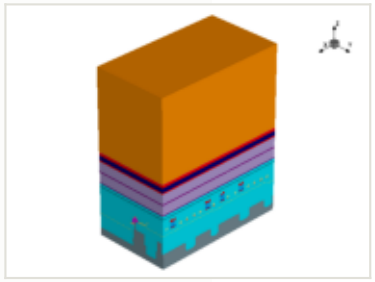

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

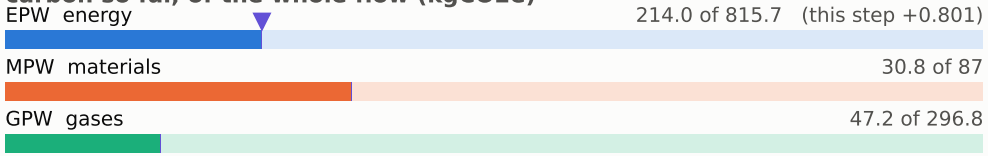

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

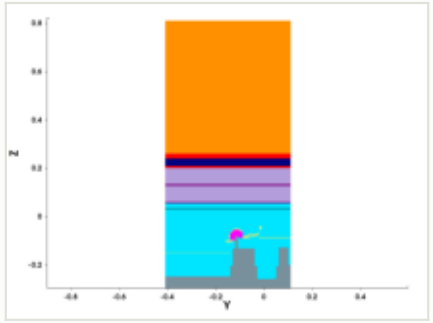

y cut at -0.150 µm

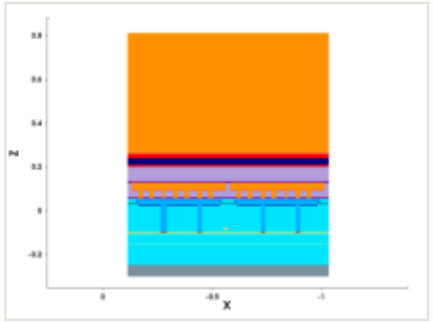

mask for this step

no mask for this step

steps by process area

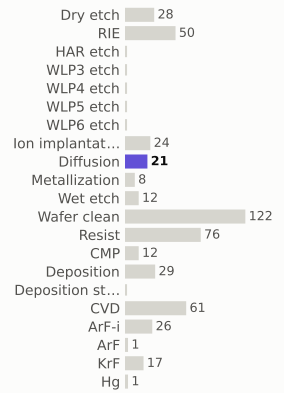

materials deposited (g)

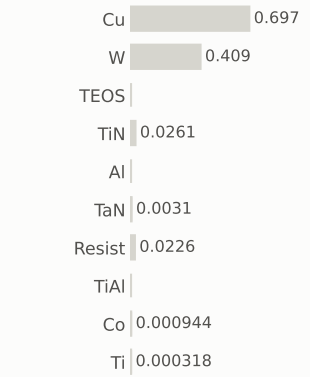

gases emitted (g)

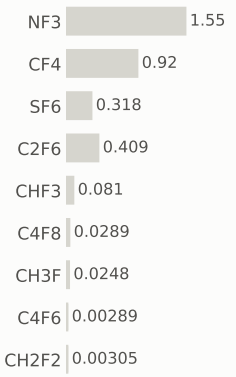

Step #6410: CMP

etch_cmp · CMP

0.169	292.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

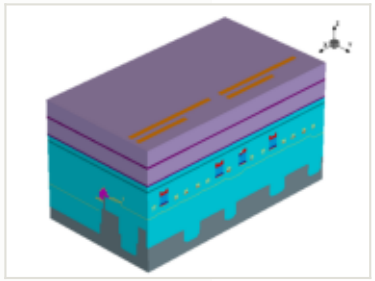

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

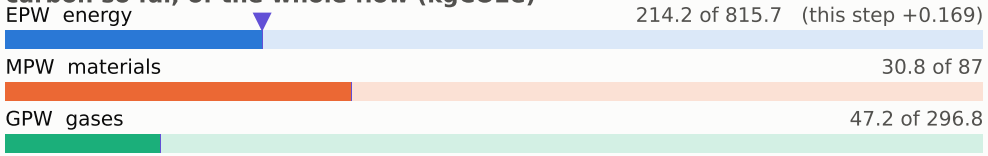

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

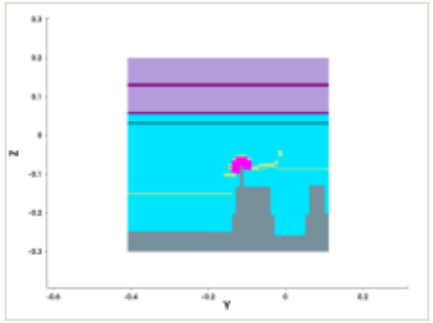

y cut at -0.150 µm

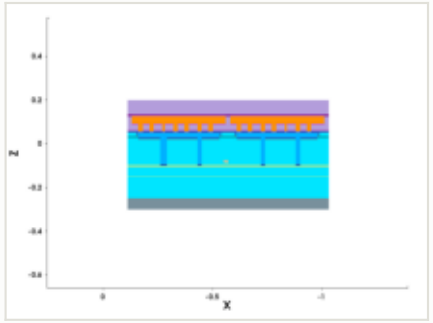

mask for this step

no mask for this step

steps by process area

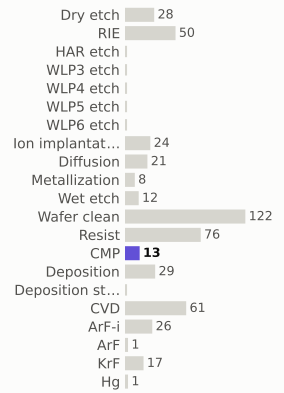

materials deposited (g)

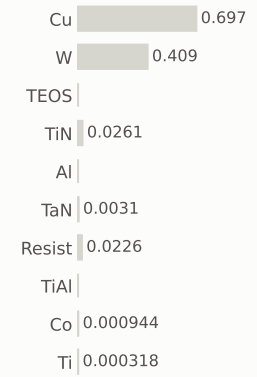

gases emitted (g)

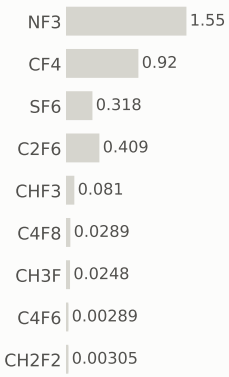

Step #6420: Wafer_clean

clean · Wafer_clean

0.169	292.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

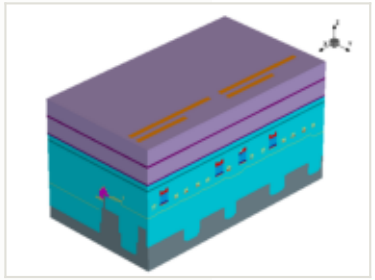

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

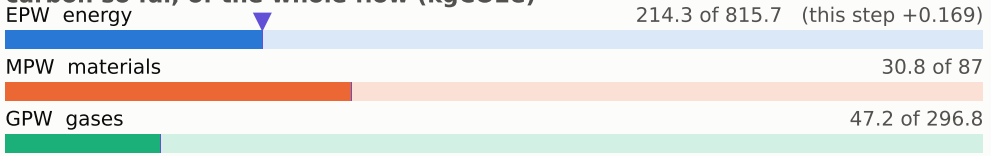

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

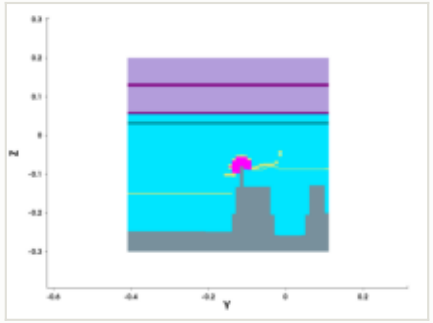

y cut at -0.150 µm

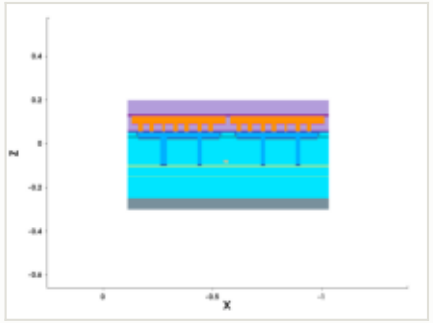

mask for this step

no mask for this step

steps by process area

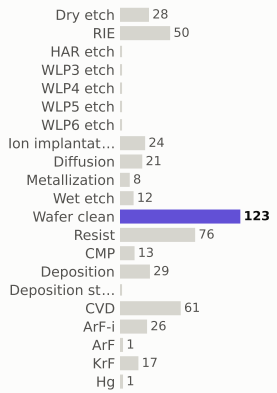

materials deposited (g)

gases emitted (g)

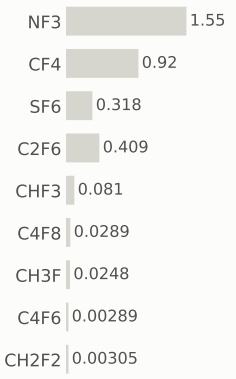

Step #6430: Metallization

depo_isotropic · Metallization

1.2	293.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

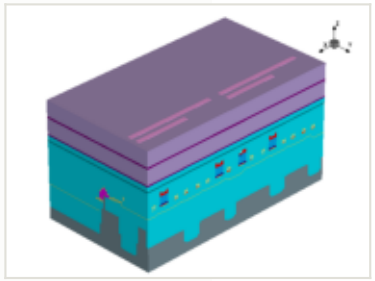

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

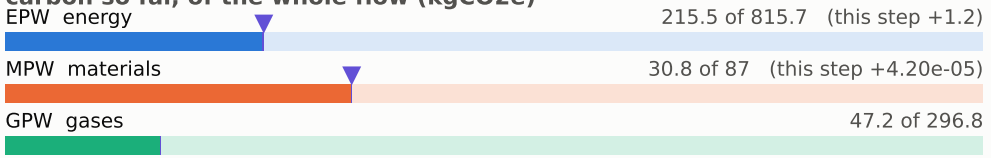

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

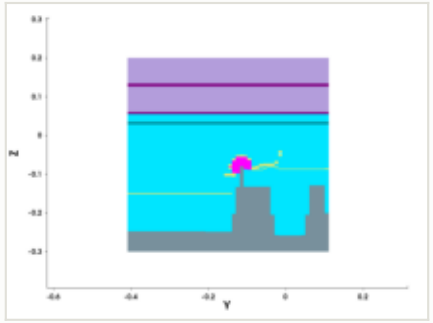

y cut at -0.150 µm

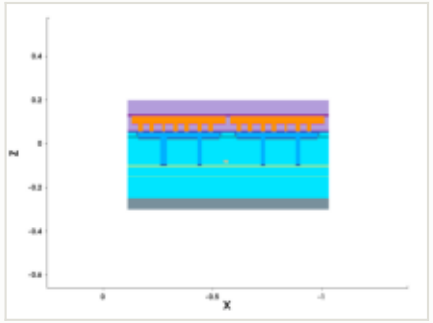

mask for this step

no mask for this step

steps by process area

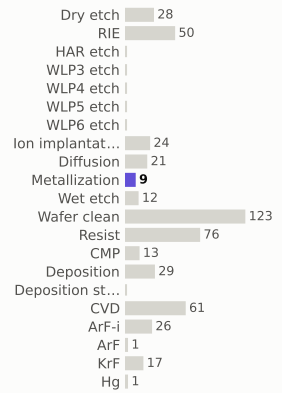

materials deposited (g)

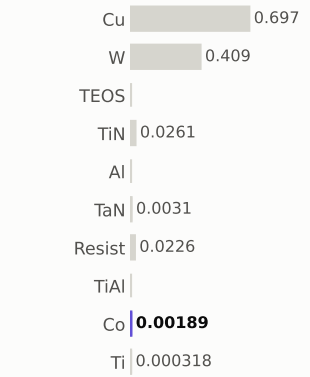

gases emitted (g)

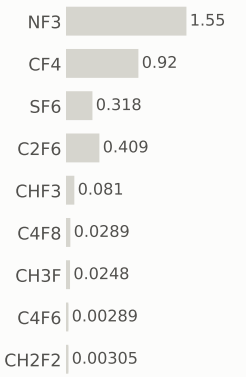

Step #6450: Deposition

depo_fill · Deposition

0.656	294.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

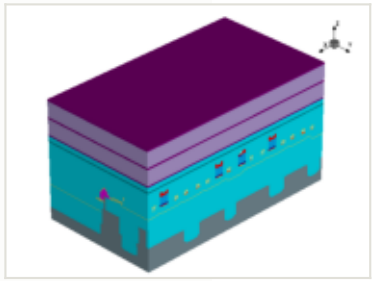

this step

process area	Deposition
material	—
thickness	0.006 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

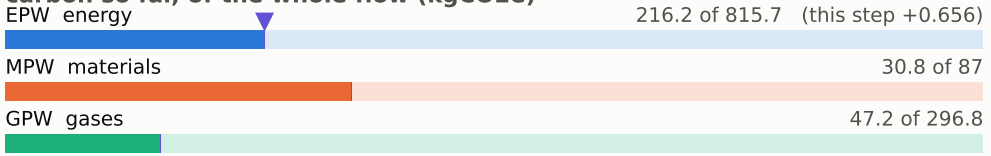

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

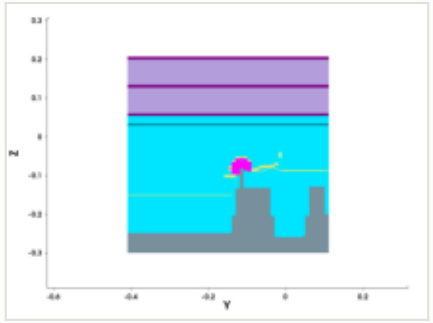

y cut at -0.150 µm

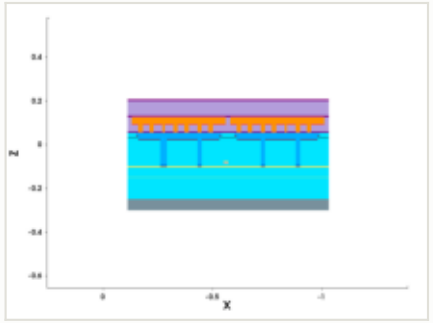

mask for this step

no mask for this step

steps by process area

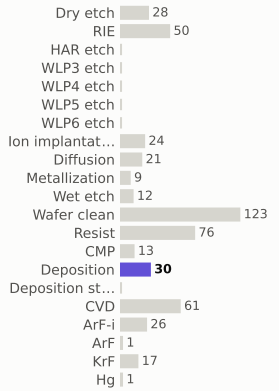

materials deposited (g)

gases emitted (g)

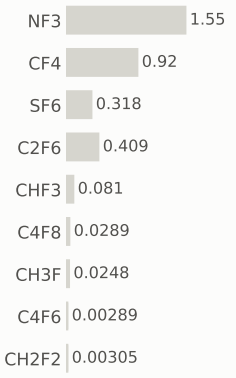

Step #6460: CVD

depo_fill · CVD

1.31	295.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

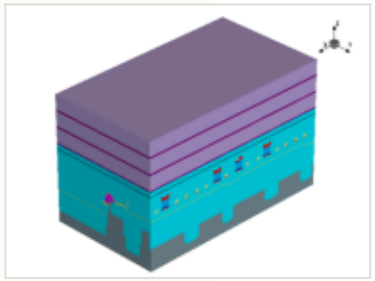

this step

process area	CVD
material	—
thickness	0.066 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

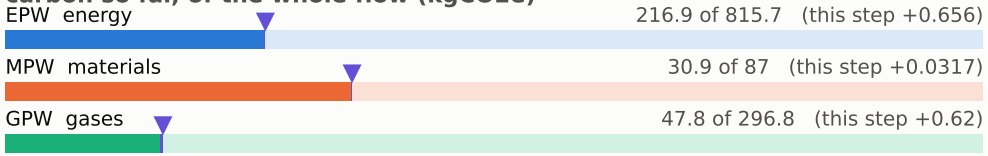

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

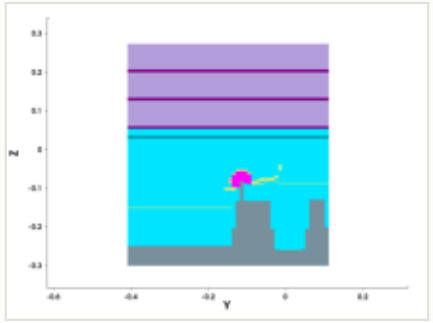

y cut at -0.150 µm

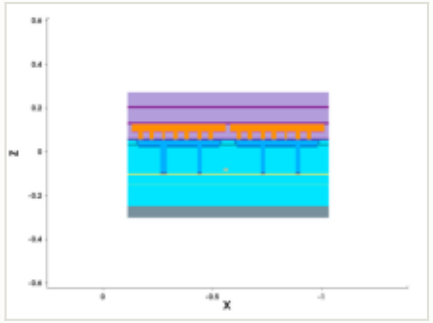

mask for this step

no mask for this step

steps by process area

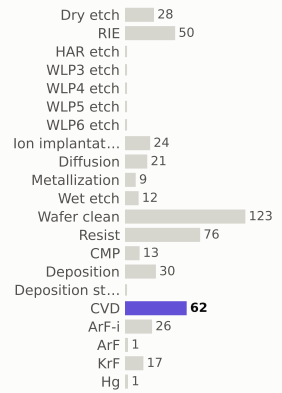

materials deposited (g)



gases emitted (g)

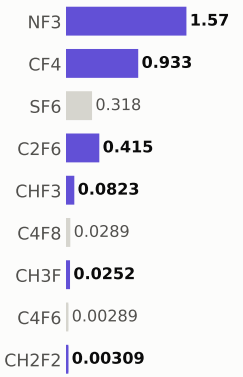

Step #6470: Diffusion

anneal · Diffusion

0.801	296.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

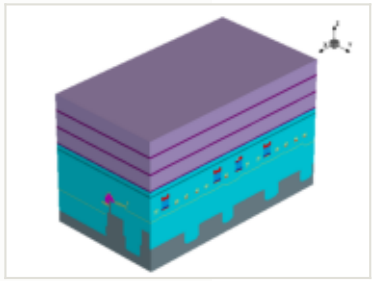

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

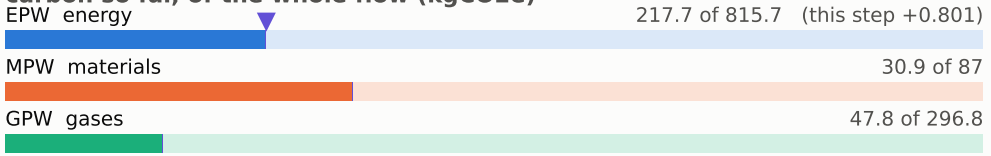

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

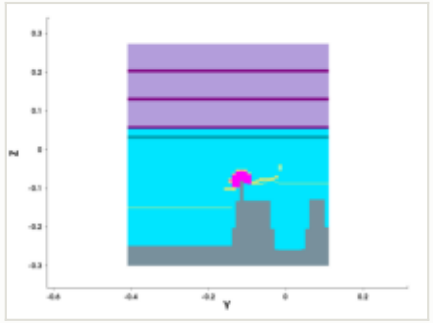

y cut at -0.150 µm

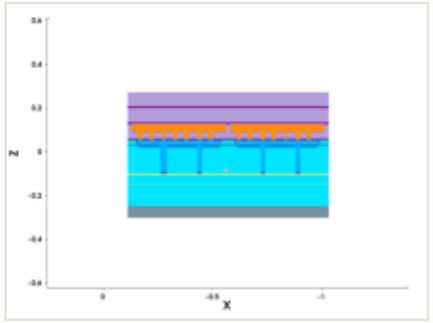

mask for this step

no mask for this step

steps by process area

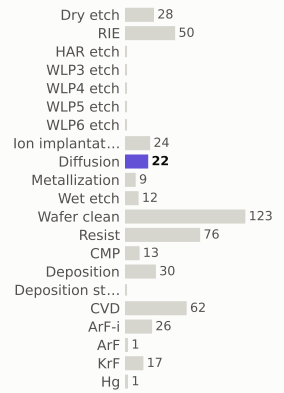

materials deposited (g)



gases emitted (g)

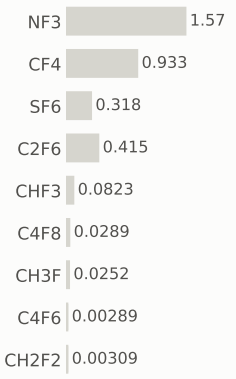

Step #6480: Wafer_clean

clean · Wafer_clean

0.169	296.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

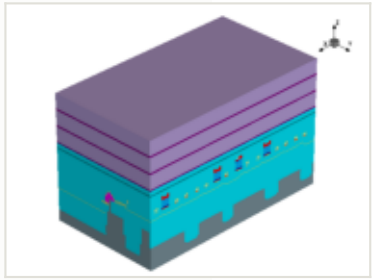

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

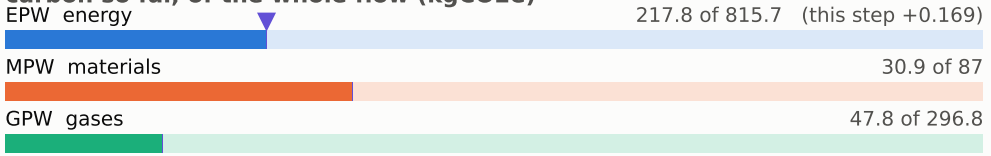

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

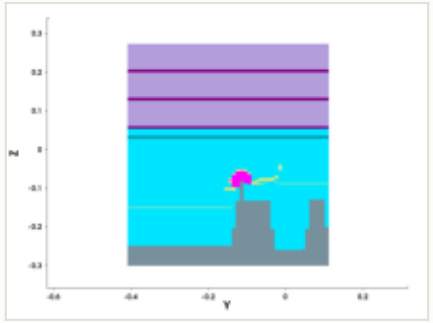

y cut at -0.150 µm

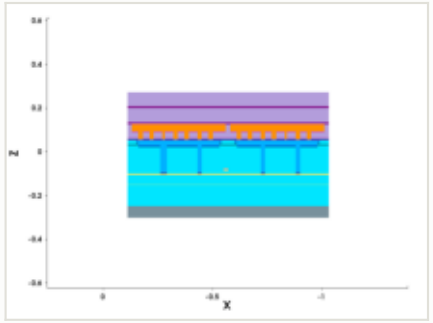

mask for this step

no mask for this step

steps by process area

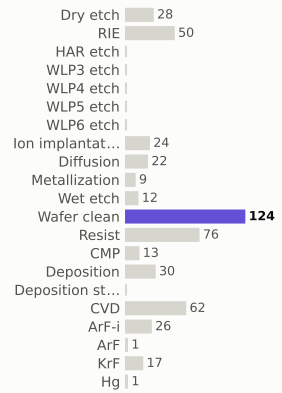

materials deposited (g)

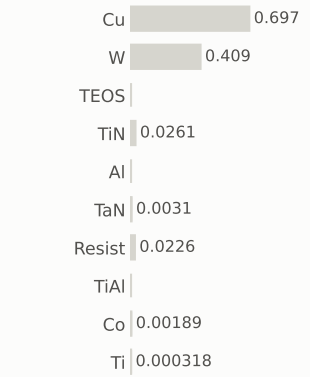

gases emitted (g)

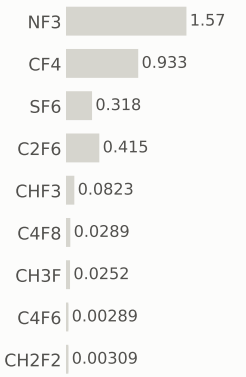

Step #6490: CVD

depo_fill · CVD

1.31	297.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

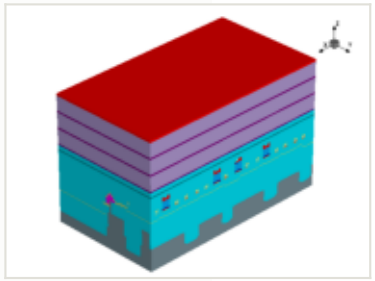

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

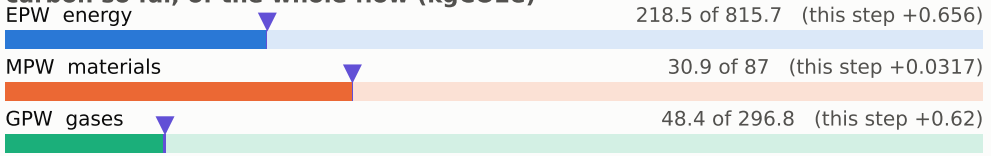

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

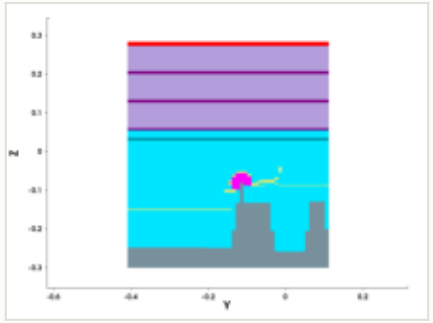

y cut at -0.150 µm

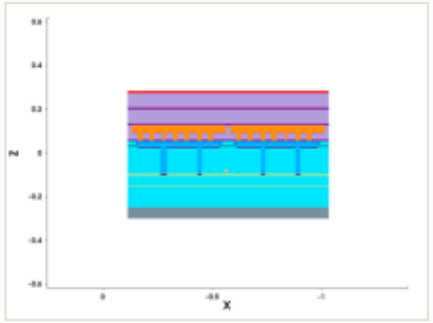

mask for this step

no mask for this step

steps by process area

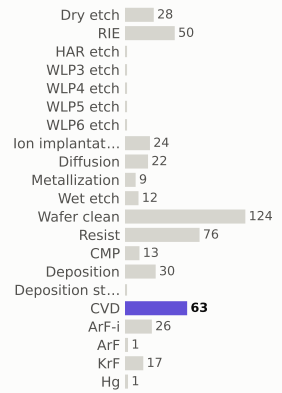

materials deposited (g)



gases emitted (g)

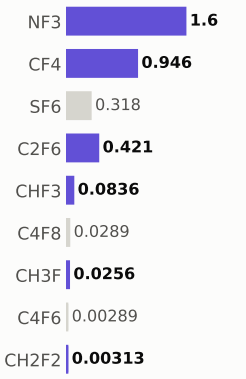

Step #6500: Deposition

depo_fill · Deposition

0.657	298.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

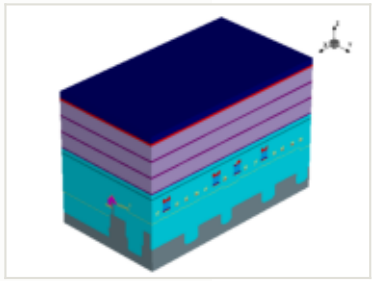

this step

process area	Deposition	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.000486 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.657 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

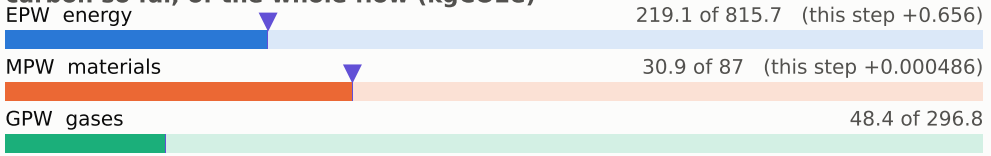

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

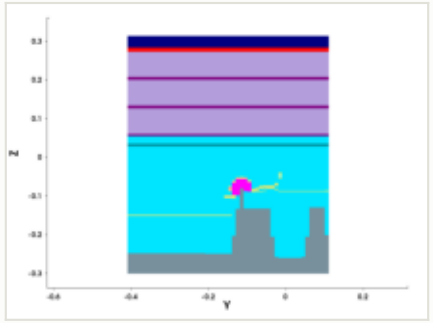

y cut at -0.150 µm

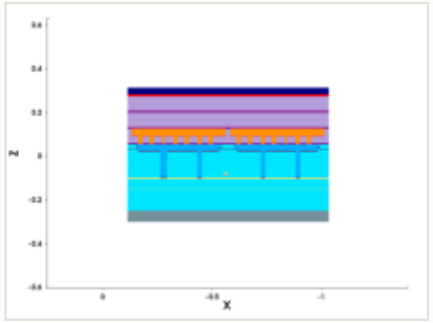

mask for this step

no mask for this step

steps by process area

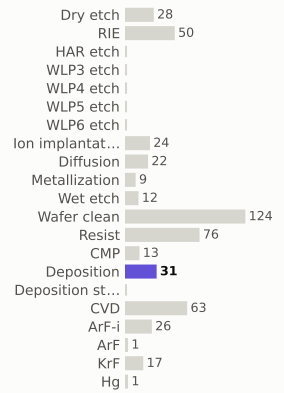

materials deposited (g)

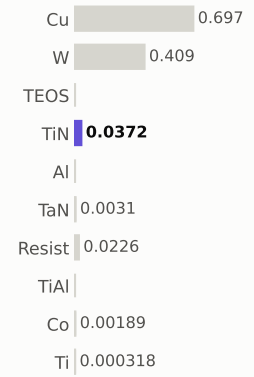

gases emitted (g)

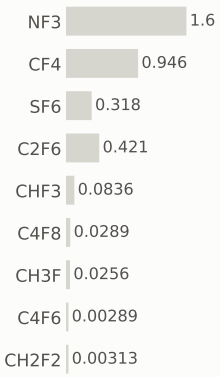

Step #6510: Wafer_clean

clean · Wafer_clean

0.169	298.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

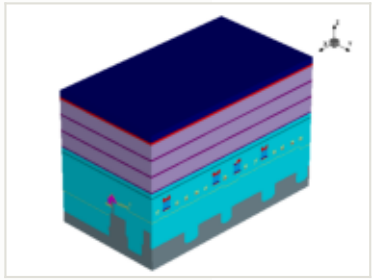

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

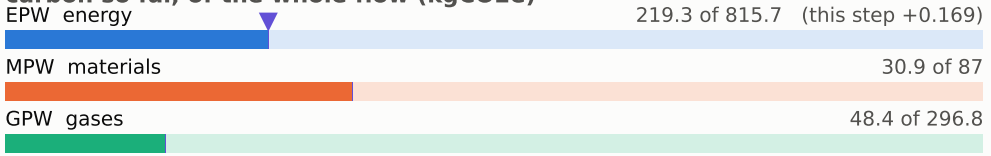

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

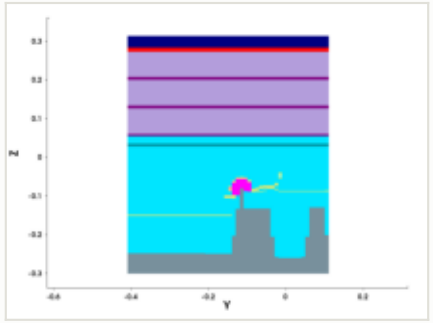

y cut at -0.150 µm

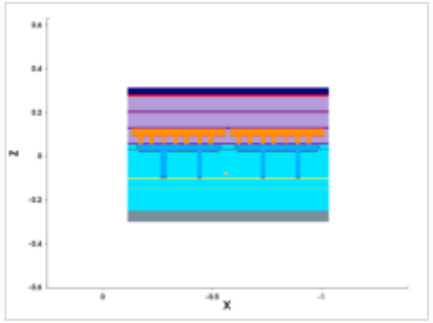

mask for this step

no mask for this step

steps by process area

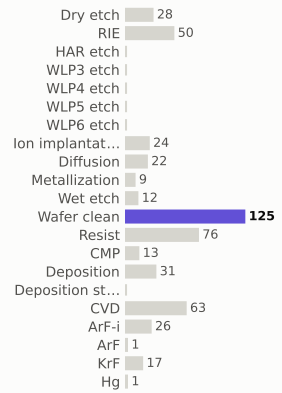

materials deposited (g)

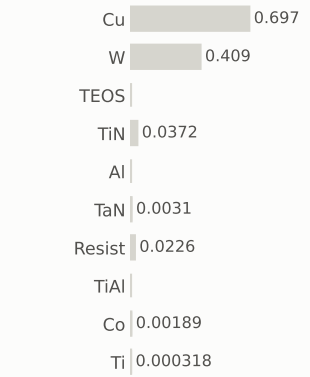

gases emitted (g)

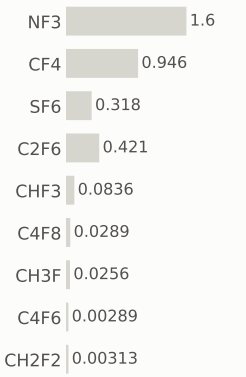

Step #6520: CVD

depo_fill · CVD

1.31	299.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

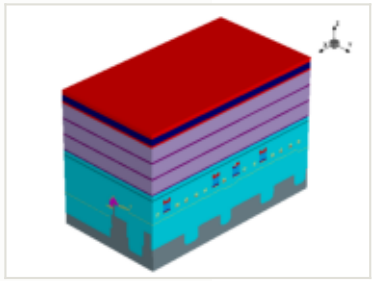

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

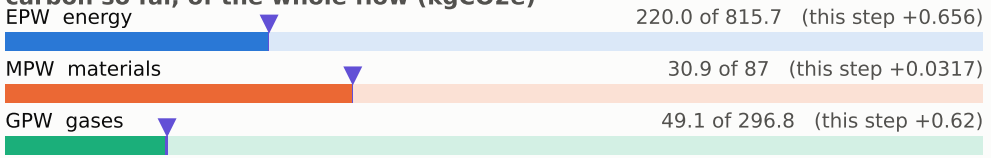

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

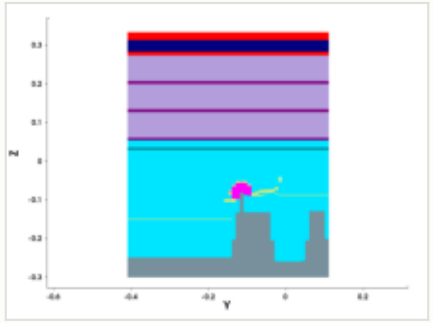

y cut at -0.150 µm

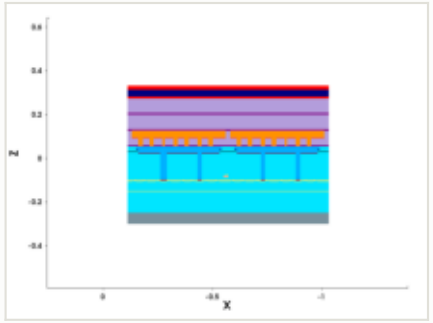

mask for this step

no mask for this step

steps by process area

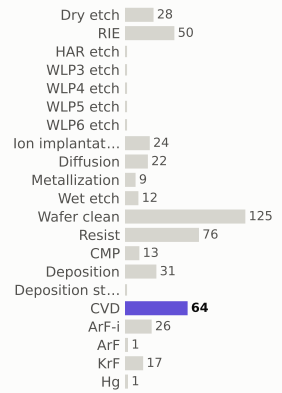

materials deposited (g)

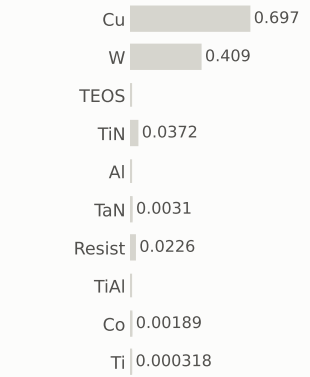

gases emitted (g)

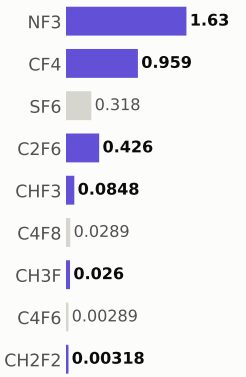

Step #6530: Resist

depo_fill · Resist

0.169	300.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

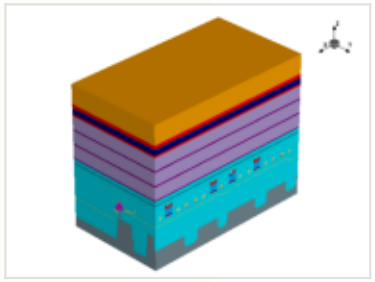

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

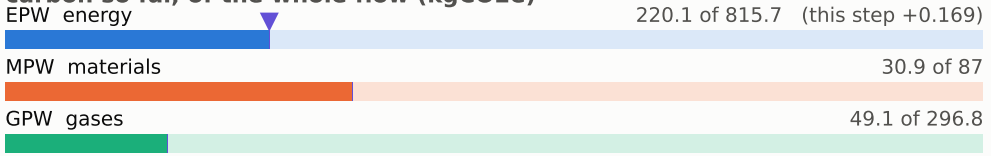

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

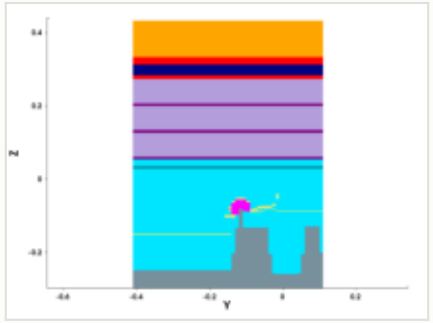

y cut at -0.150 µm

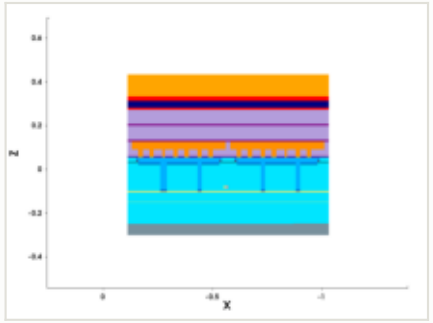

mask for this step

no mask for this step

steps by process area

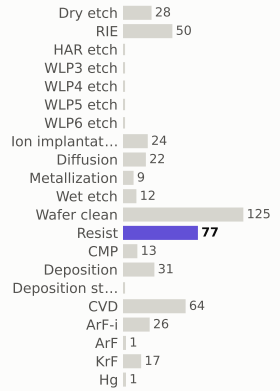

materials deposited (g)

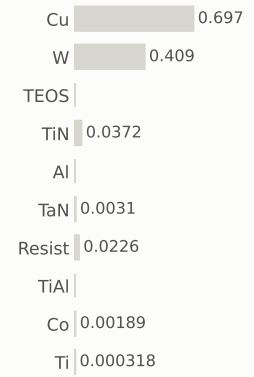

gases emitted (g)

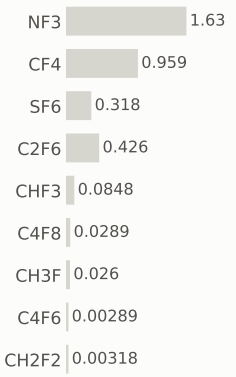

Step #6540: CVD

depo_fill · CVD

1.31	301.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

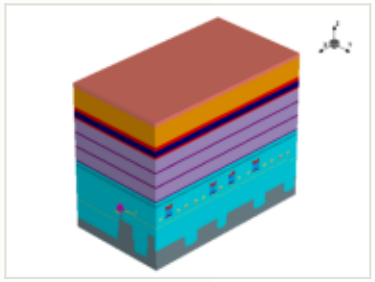

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

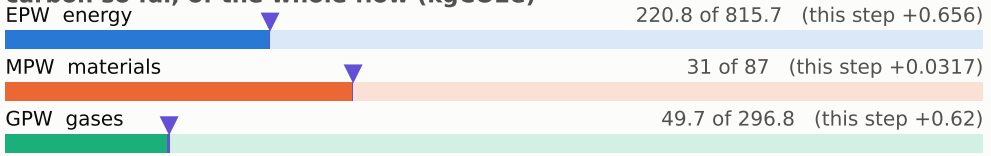

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

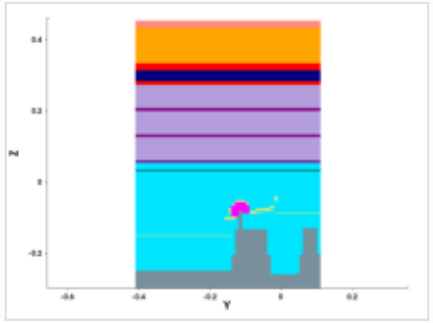

y cut at -0.150 µm

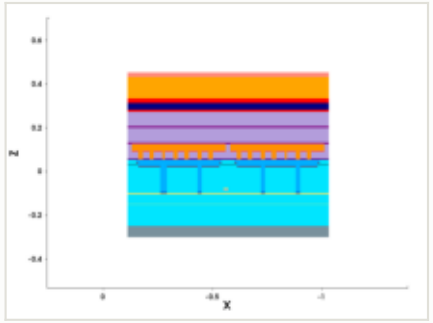

mask for this step

no mask for this step

steps by process area

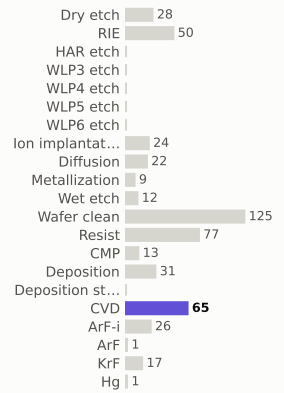

materials deposited (g)



gases emitted (g)

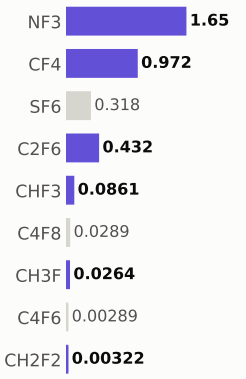

Step #6550: Wafer_clean

clean · Wafer_clean

0.169	301.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

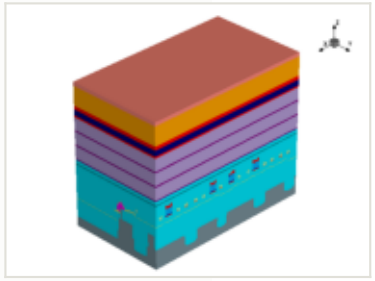

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

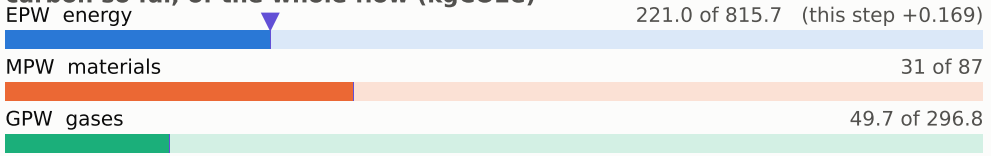

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

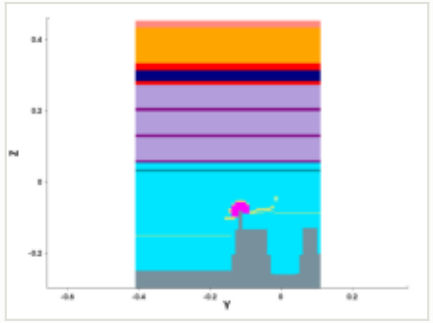

y cut at -0.150 µm

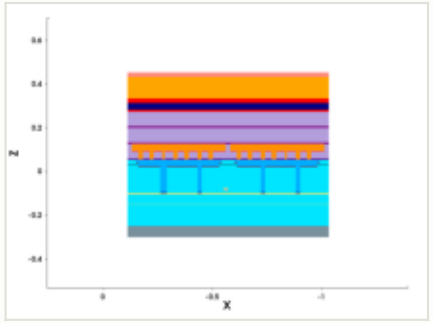

mask for this step

no mask for this step

steps by process area

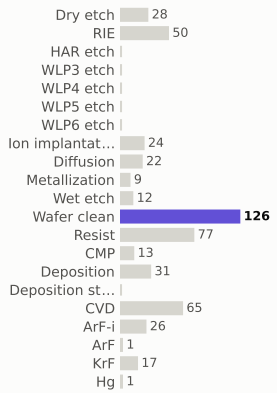

materials deposited (g)

gases emitted (g)

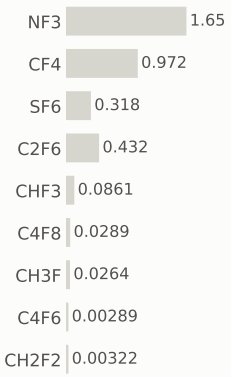

Step #6560: Resist

resist · Resist

0.169	301.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

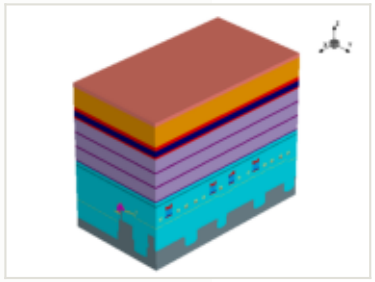

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

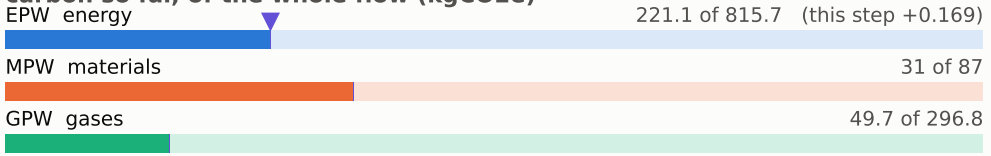

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

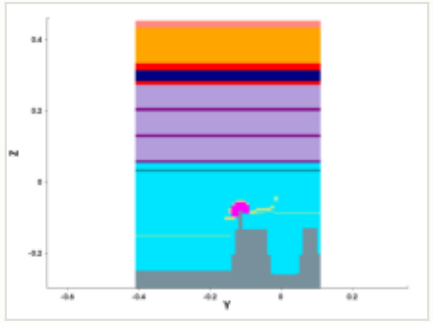

y cut at -0.150 µm

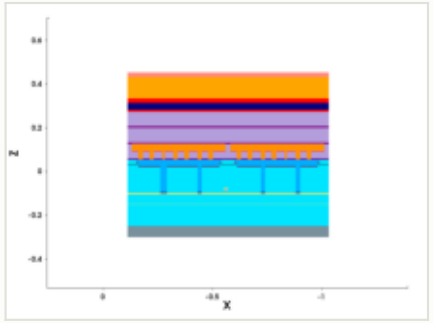

mask for this step

no mask for this step

steps by process area

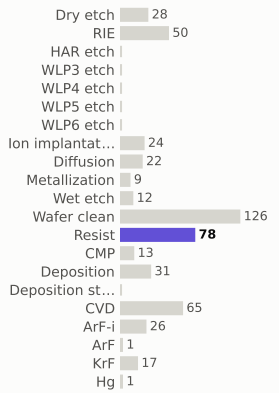

materials deposited (g)

gases emitted (g)

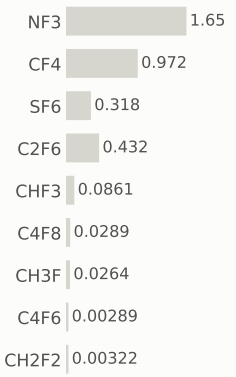

Step #6570: ArF-i

litho_patterning · ArF-i

0.217	302.0	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

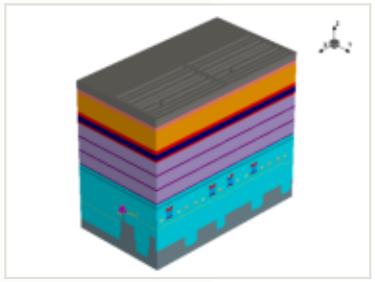

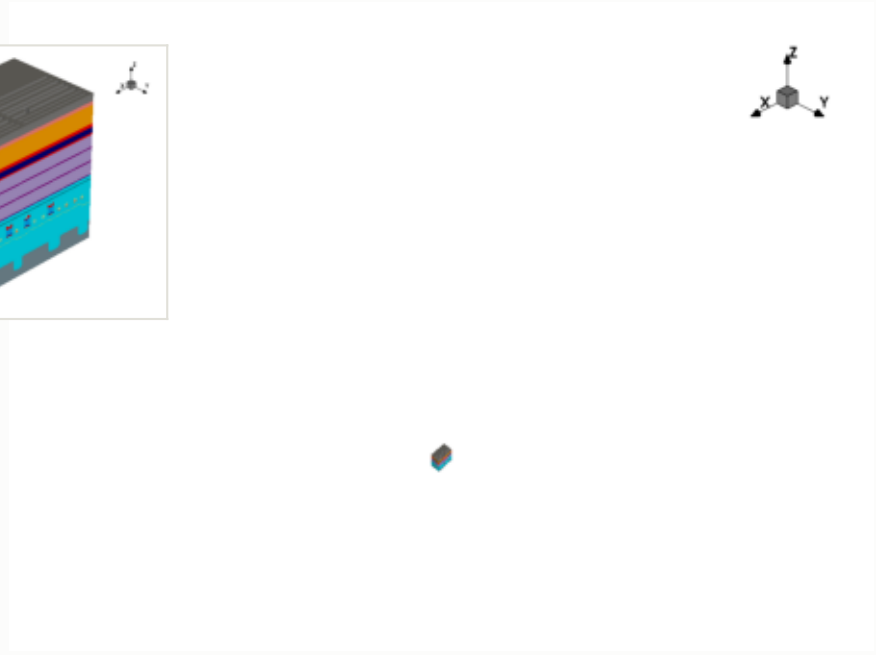

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

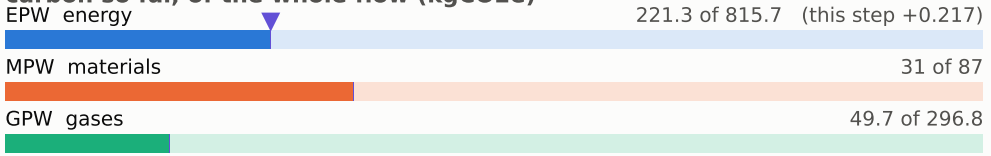

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

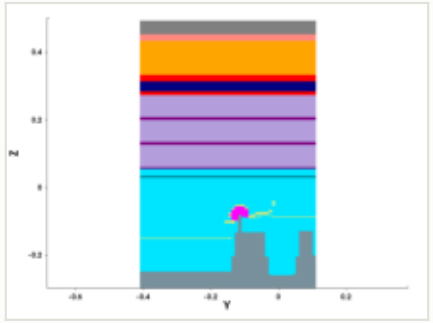

y cut at -0.150 µm

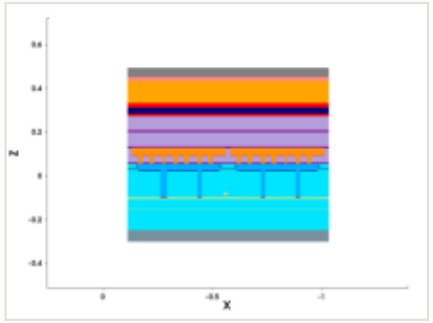

mask: layer 2030:0 (GDSII)

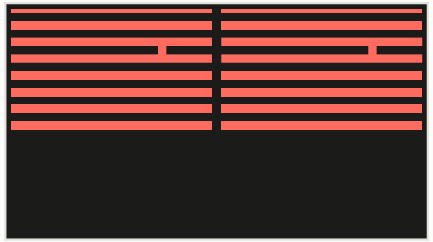

steps by process area

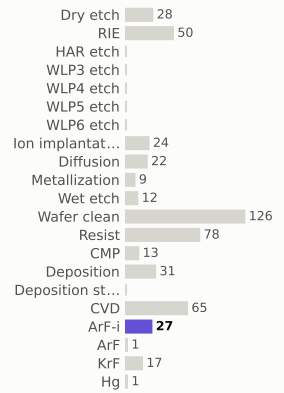

materials deposited (g)

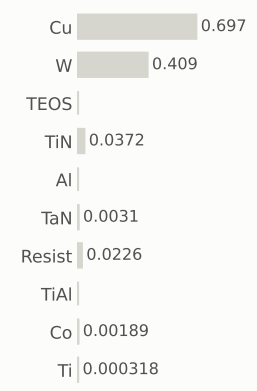

gases emitted (g)

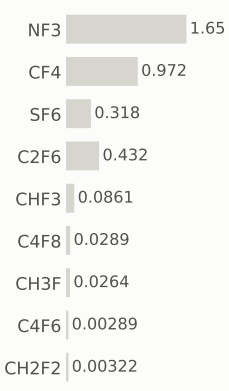

Step #6580: RIE

etch_anisotropic · RIE

1.04	303.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

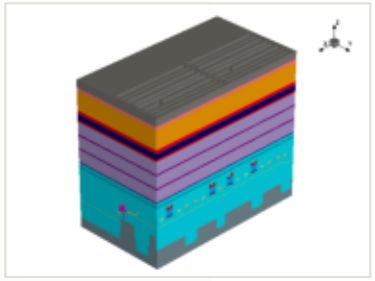

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

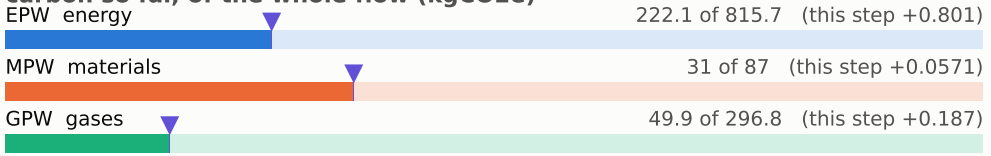

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

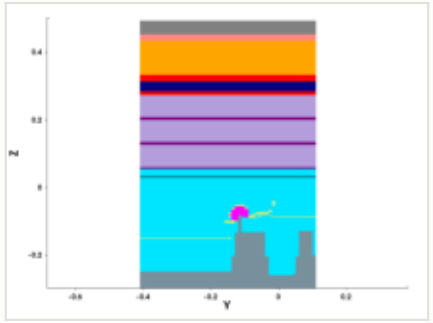

y cut at -0.150 µm

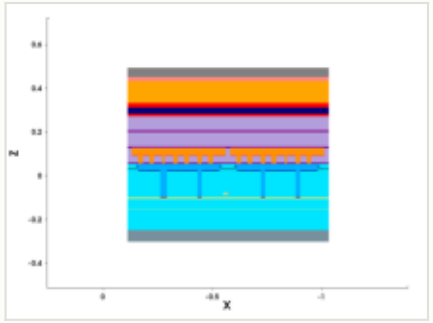

mask for this step

no mask for this step

steps by process area

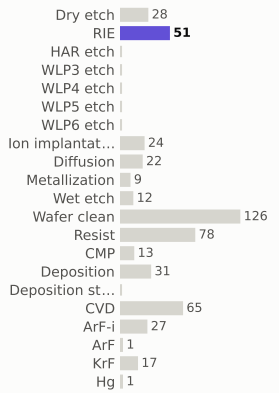

materials deposited (g)

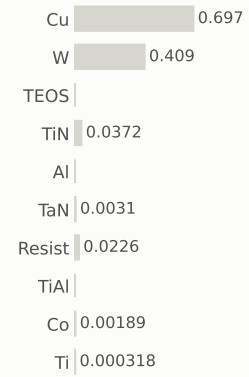

gases emitted (g)

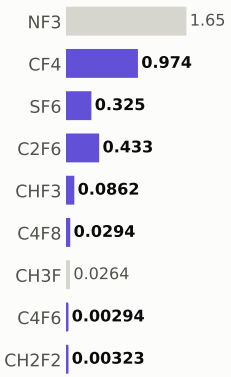

Step #6590: Wafer_clean

clean · Wafer_clean

0.169	303.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

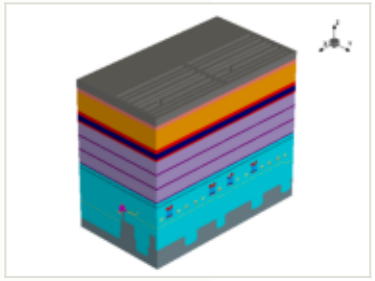

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

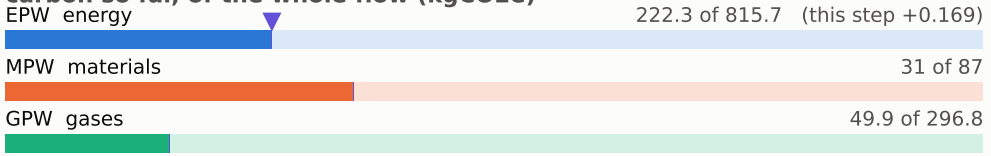

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

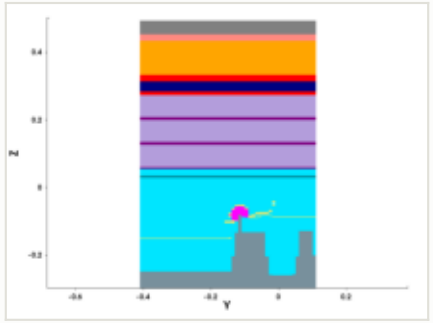

y cut at -0.150 µm

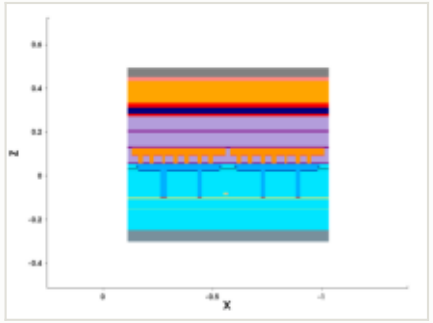

mask for this step

no mask for this step

steps by process area

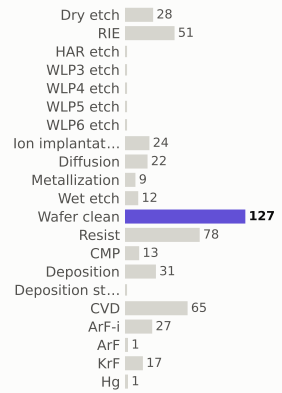

materials deposited (g)



gases emitted (g)

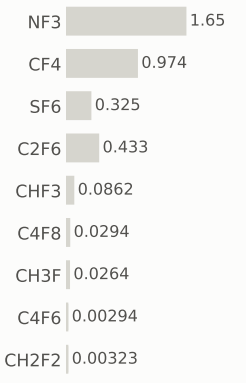

Step #6600: Resist

depo_fill · Resist

0.169	303.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

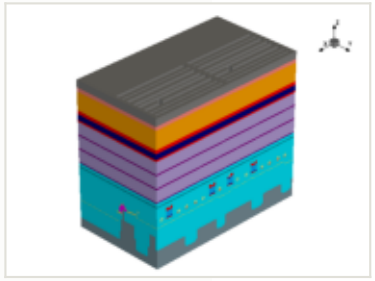

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

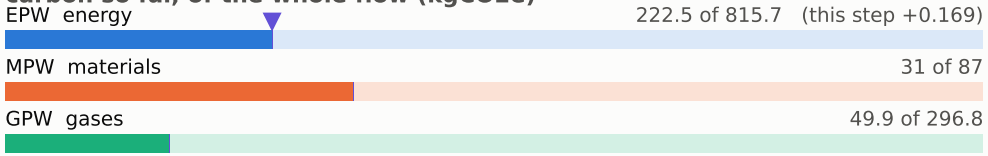

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

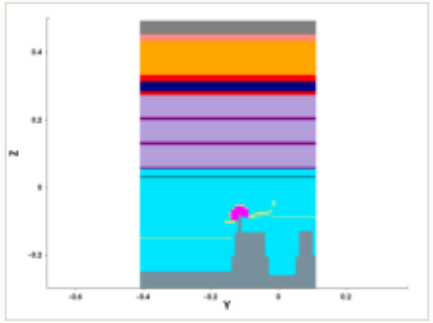

y cut at -0.150 µm

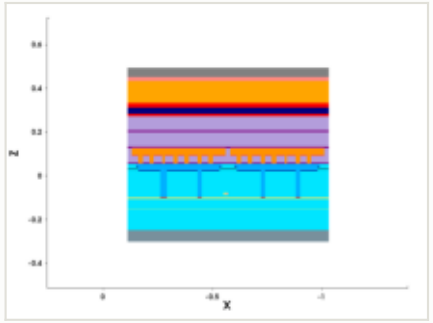

mask for this step

no mask for this step

steps by process area

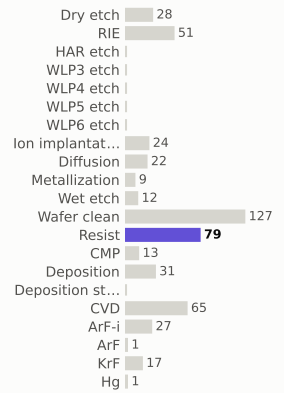

materials deposited (g)

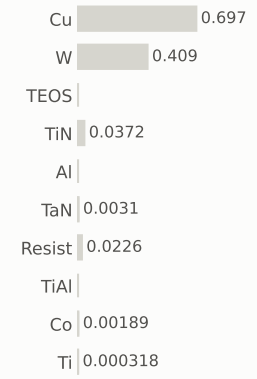

gases emitted (g)

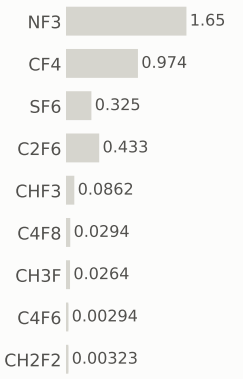

Step #6610: CVD

depo_isotropic · CVD

1.31	304.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

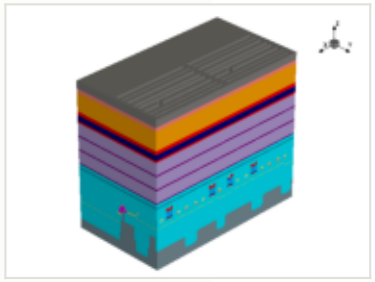

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

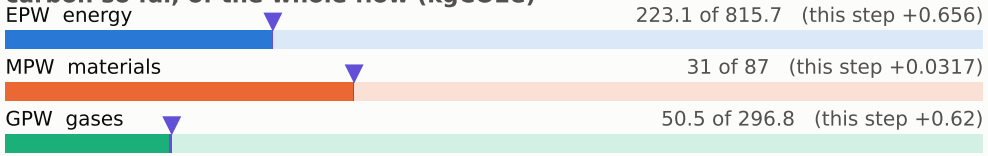

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

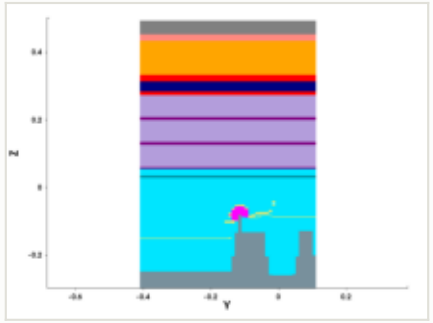

y cut at -0.150 µm

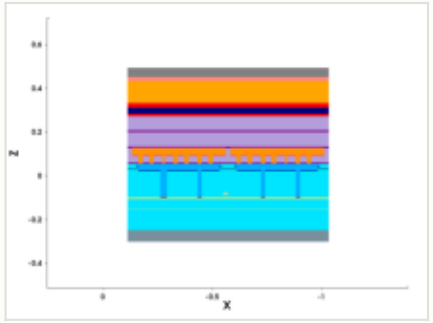

mask for this step

no mask for this step

steps by process area

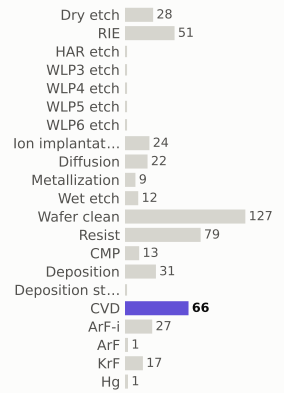

materials deposited (g)

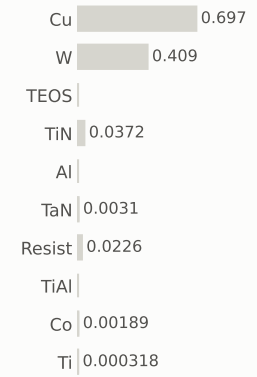

gases emitted (g)

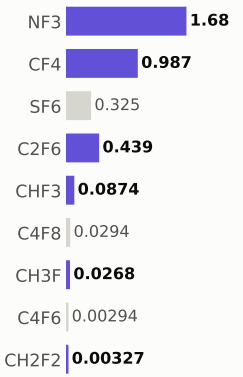

Step #6620: Wafer_clean

clean · Wafer_clean

0.169	304.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

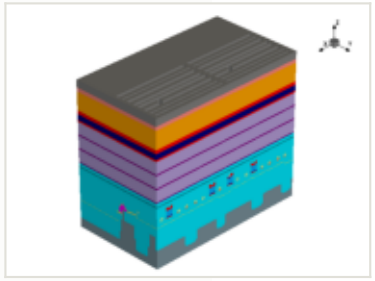

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

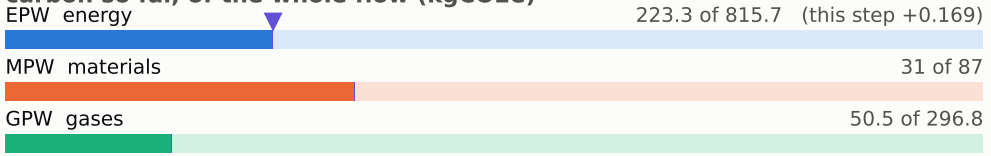

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

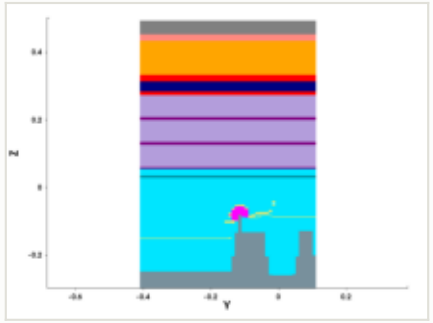

y cut at -0.150 µm

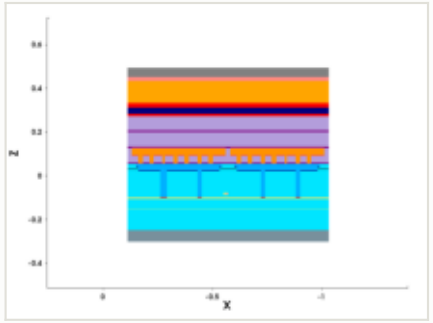

mask for this step

no mask for this step

steps by process area

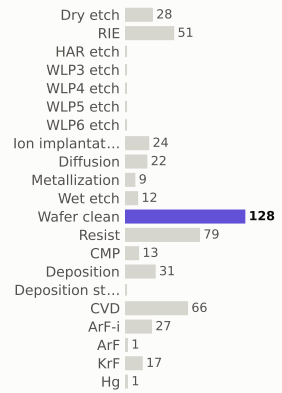

materials deposited (g)

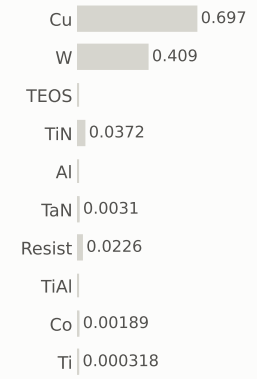

gases emitted (g)

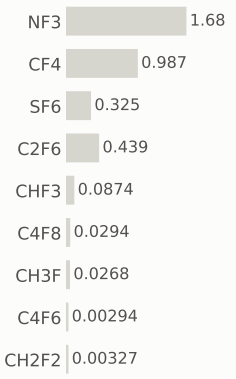

Step #6630: Resist

resist · Resist

0.169	305.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

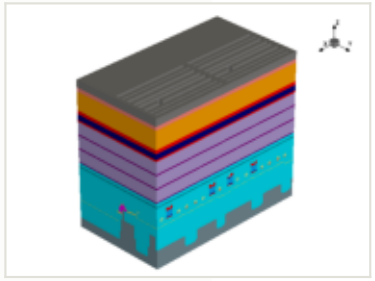

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

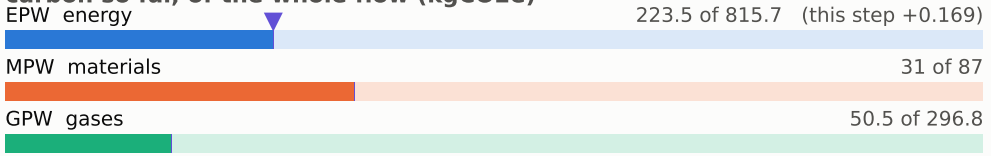

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

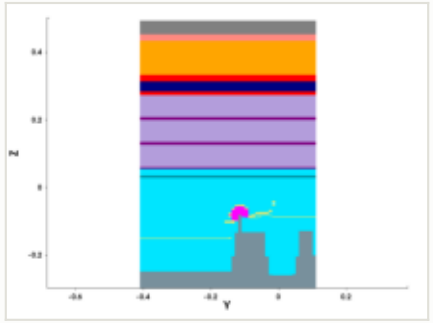

y cut at -0.150 µm

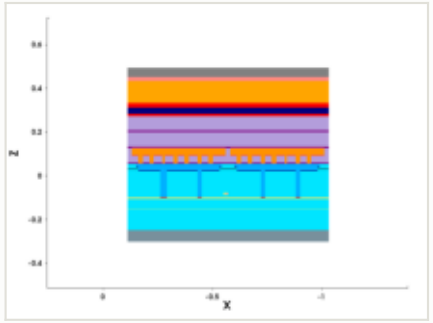

mask for this step

no mask for this step

steps by process area

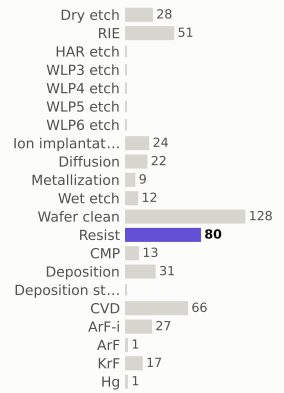

materials deposited (g)

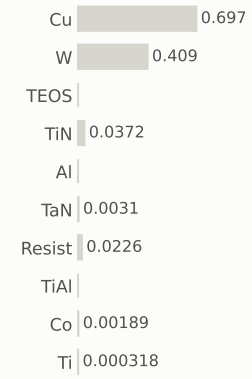

gases emitted (g)

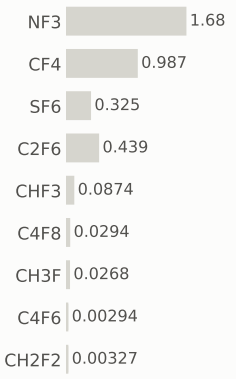

Step #6640: ArF-i

litho_patterning · ArF-i

0.217	305.2	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

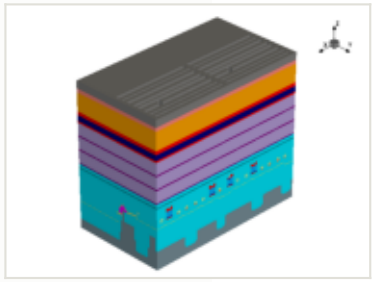

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

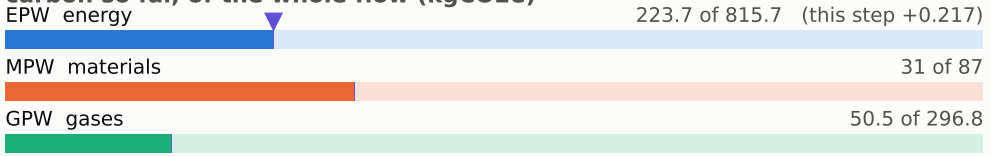

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

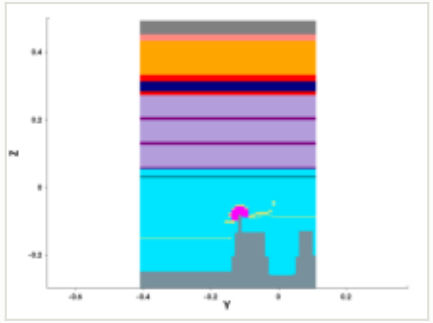

y cut at -0.150 µm

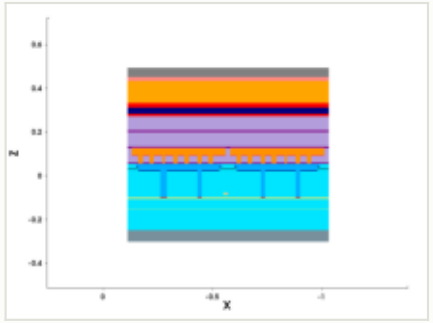

mask: layer 2100:0, positive (GDSII)

steps by process area

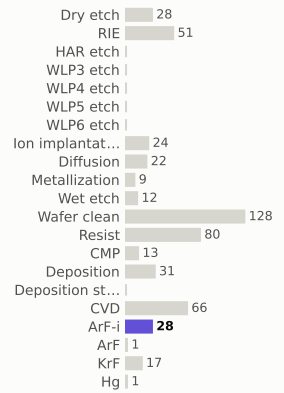

materials deposited (g)

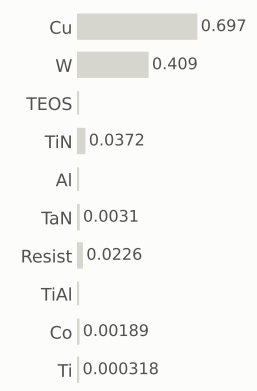

gases emitted (g)

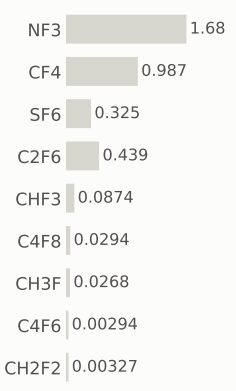

Step #6650: RIE

etch_strip · RIE

1.04	306.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

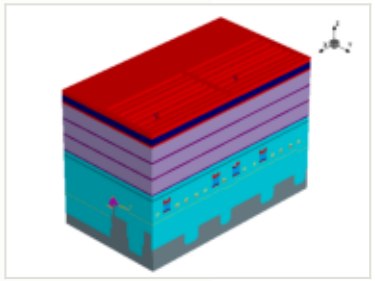

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

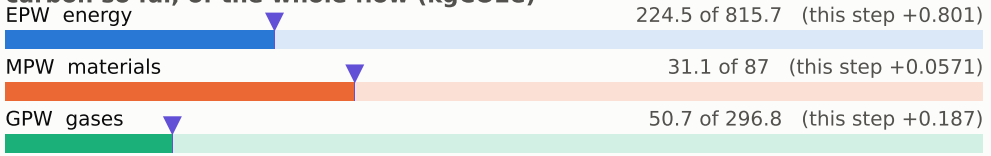

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

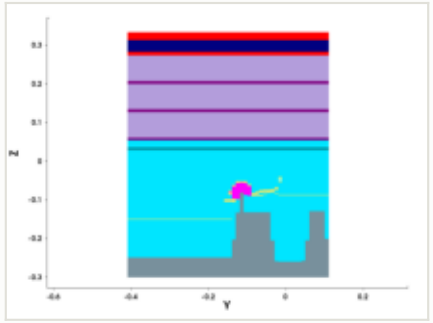

y cut at -0.150 µm

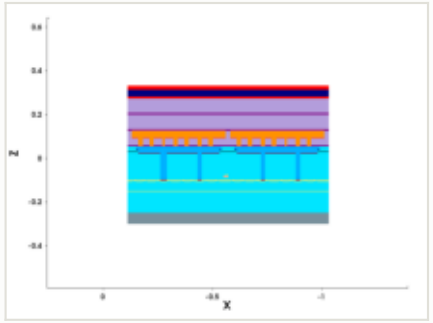

mask for this step

no mask for this step

steps by process area

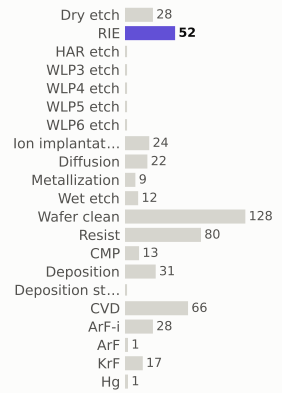

materials deposited (g)

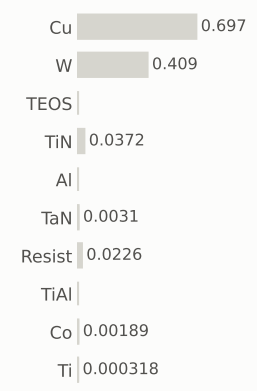

gases emitted (g)

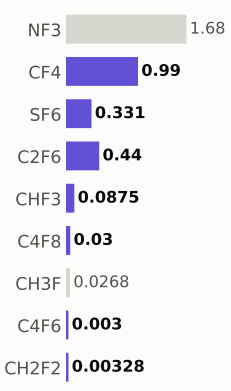

Step #6660: Wafer_clean

clean · Wafer_clean

0.169	306.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

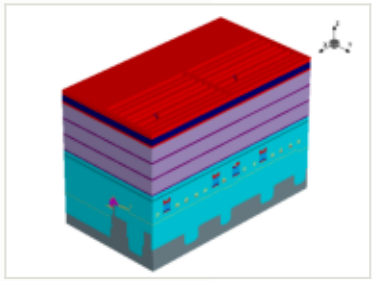

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

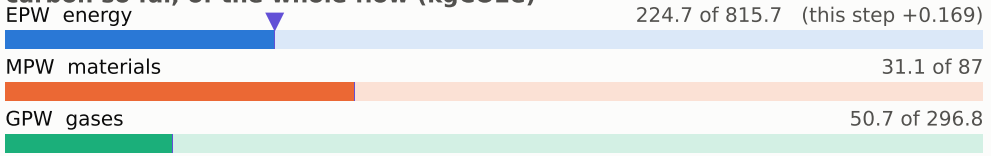

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

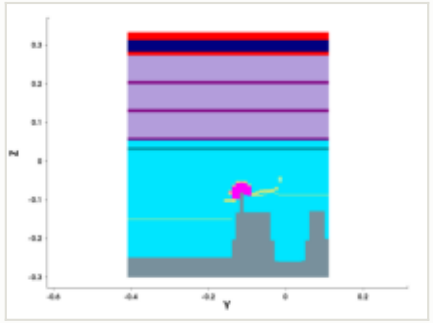

y cut at -0.150 µm

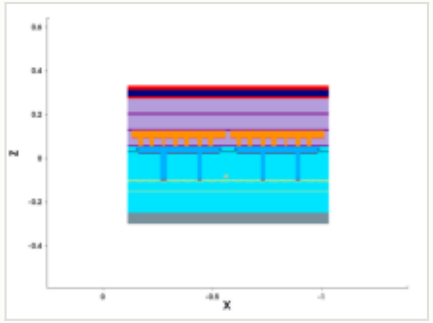

mask for this step

no mask for this step

steps by process area

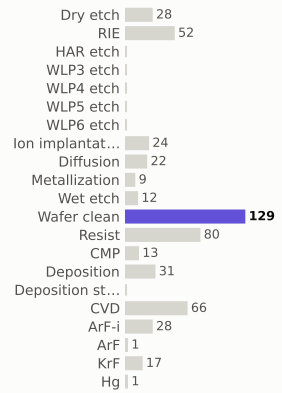

materials deposited (g)

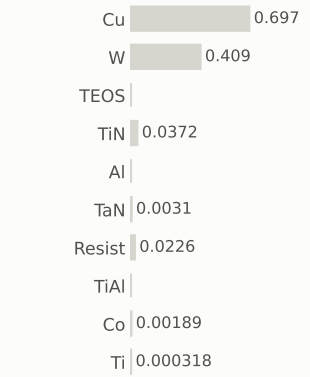

gases emitted (g)

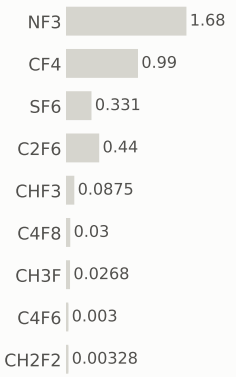

Step #6670: Resist

depo_fill · Resist

0.169	306.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

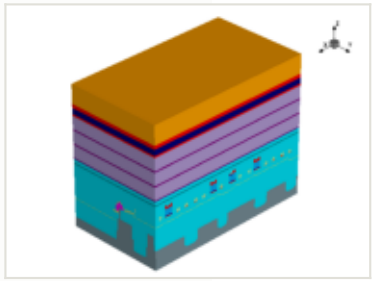

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

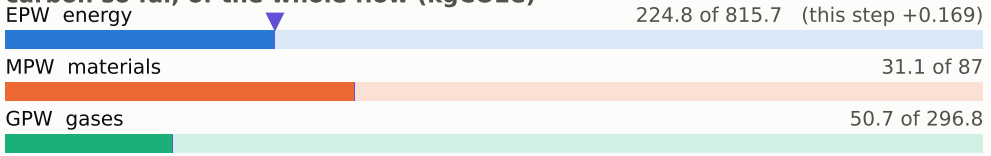

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

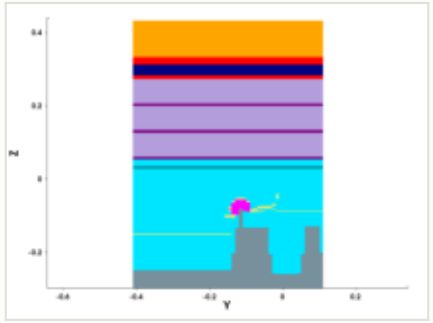

y cut at -0.150 µm

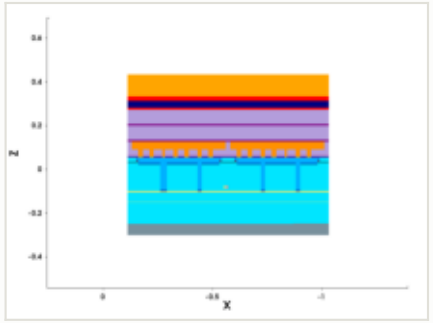

mask for this step

no mask for this step

steps by process area

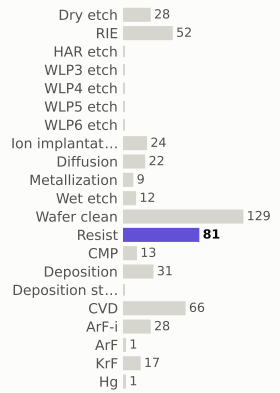

materials deposited (g)

gases emitted (g)

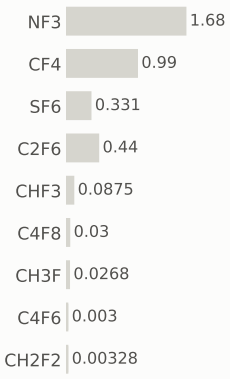

Step #6680: Deposition

depo_isotropic · Deposition

0.656	307.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

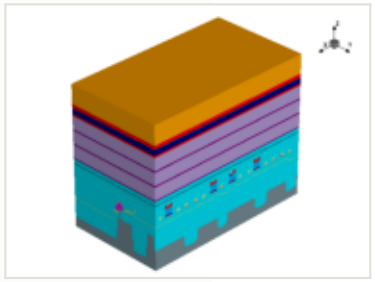

this step

process area	Deposition
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

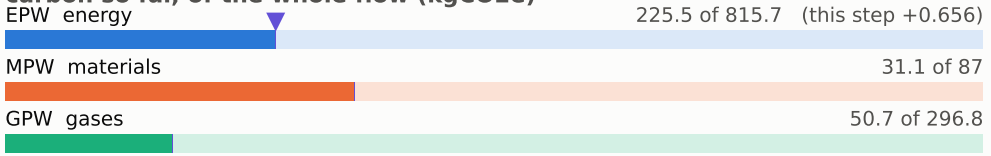

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

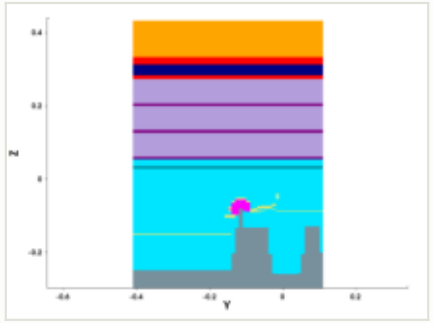

y cut at -0.150 µm

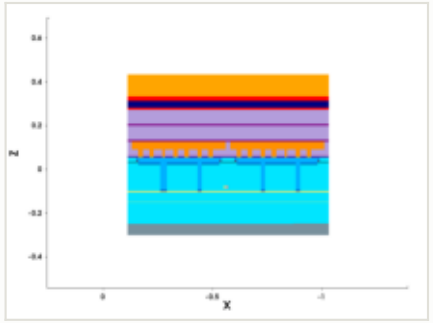

mask for this step

no mask for this step

steps by process area

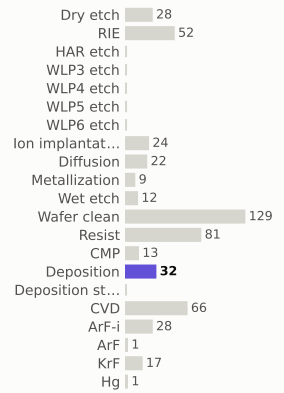

materials deposited (g)



gases emitted (g)

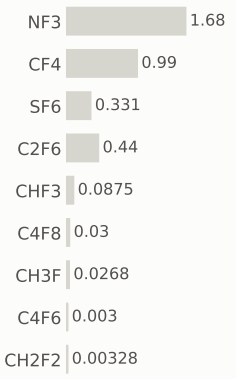

Step #6690: CVD

depo_isotropic · CVD

1.31	308.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

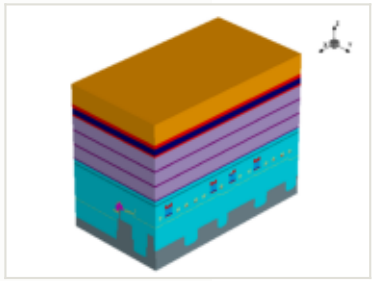

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

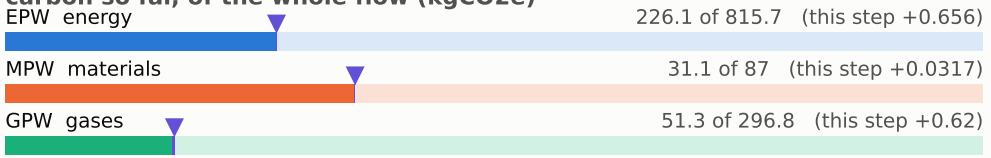

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

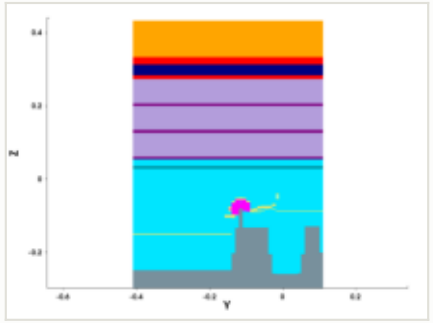

y cut at -0.150 µm

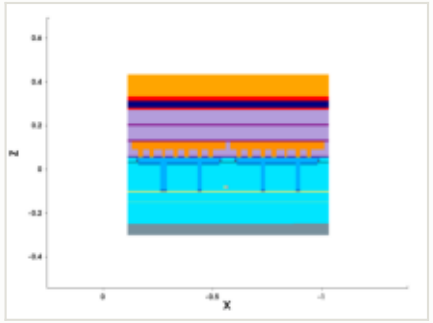

mask for this step

no mask for this step

steps by process area

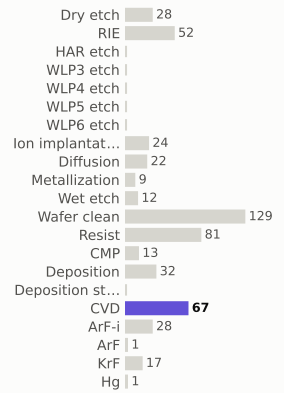

materials deposited (g)

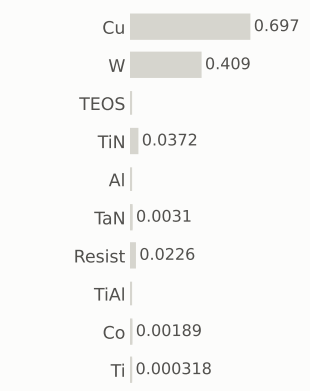

gases emitted (g)

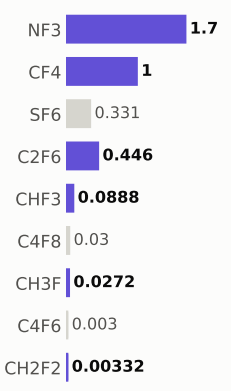

Step #6700: Resist

depo_fill · Resist

0.169	308.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

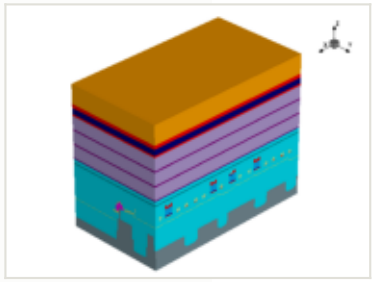

this step

process area	Resist
material	—
thickness	0 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

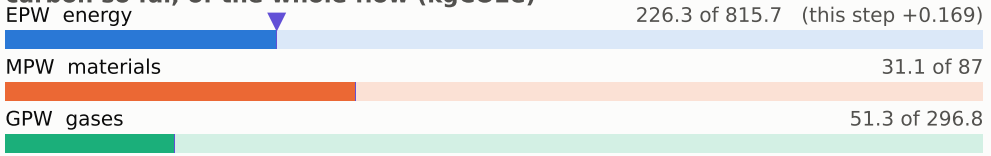

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

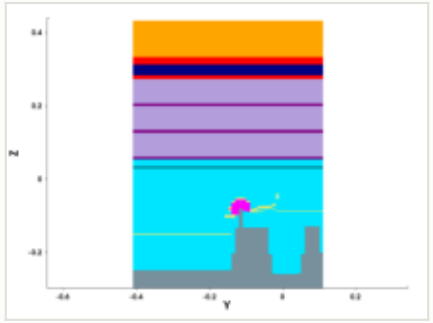

y cut at -0.150 µm

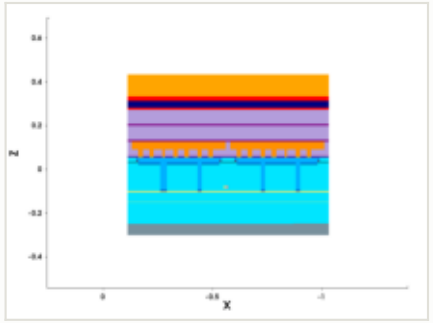

mask for this step

no mask for this step

steps by process area

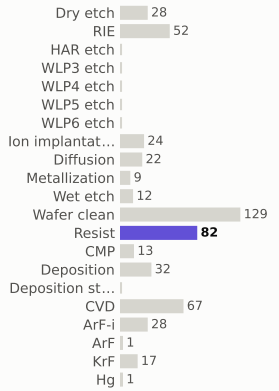

materials deposited (g)

gases emitted (g)

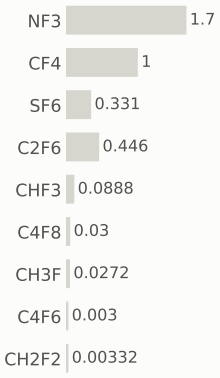

Step #6710: CVD

depo_fill · CVD

1.31	310.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

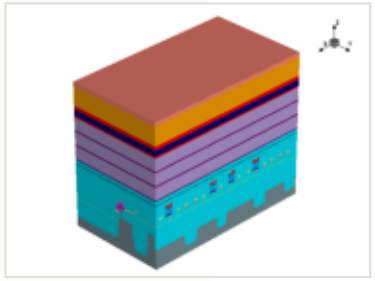

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

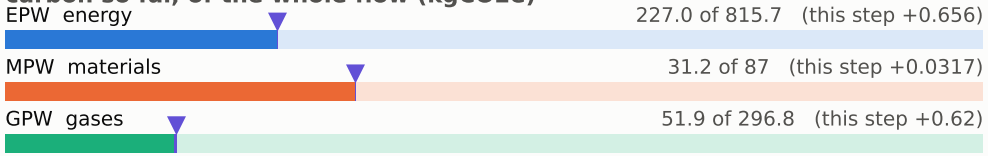

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

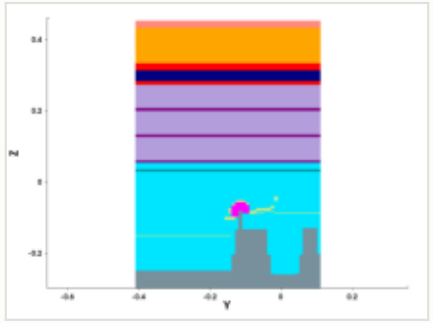

y cut at -0.150 µm

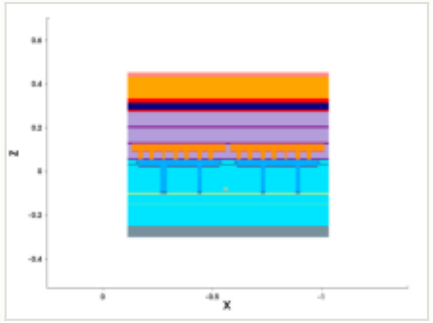

mask for this step

no mask for this step

steps by process area

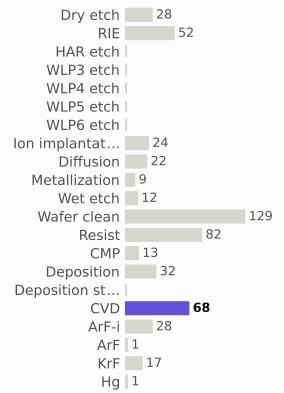

materials deposited (g)

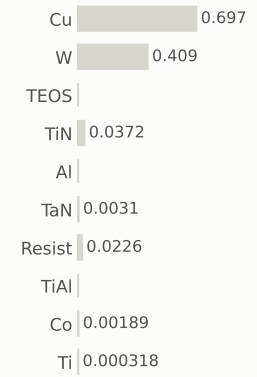

gases emitted (g)

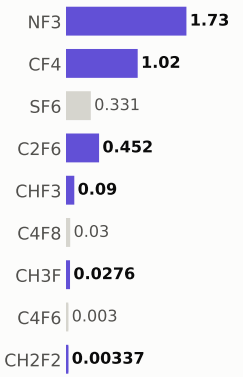

Step #6720: Wafer_clean

clean · Wafer_clean

0.169	310.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

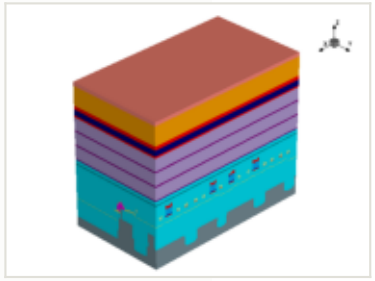

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

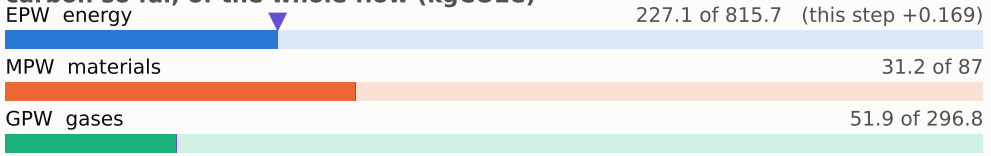

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

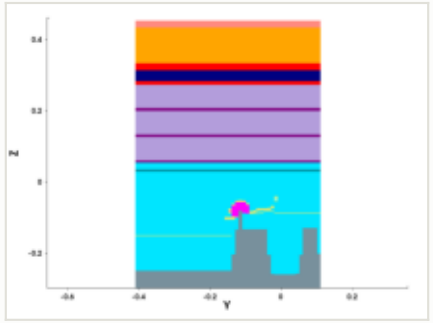

y cut at -0.150 µm

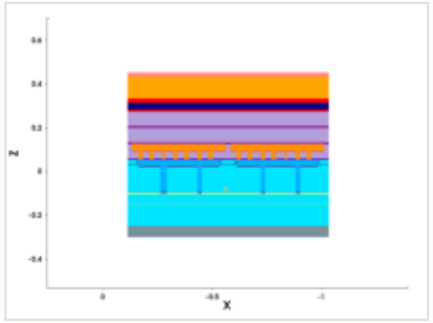

mask for this step

no mask for this step

steps by process area

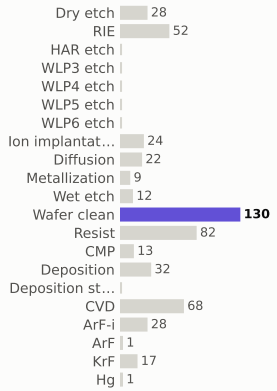

materials deposited (g)

gases emitted (g)

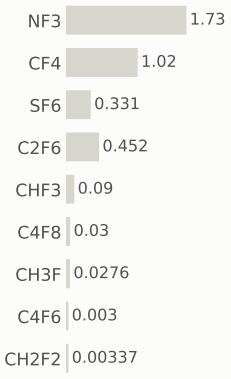

Step #6730: Resist

resist · Resist

0.169	310.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

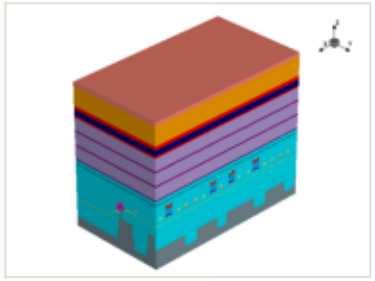

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

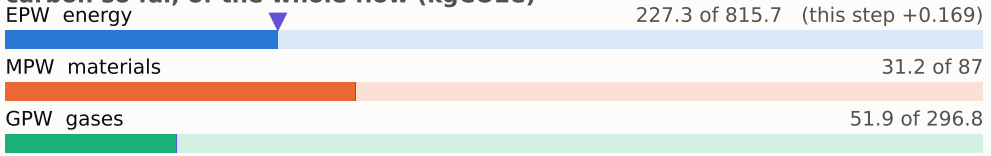

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

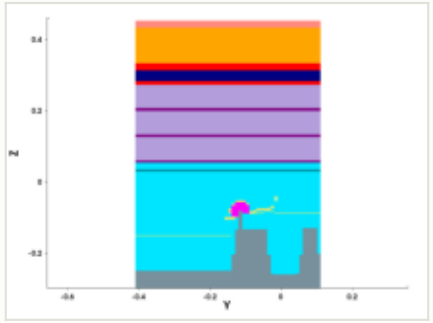

y cut at -0.150 µm

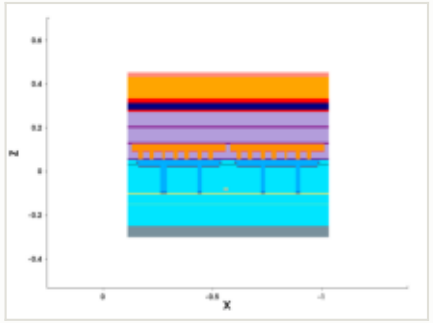

mask for this step

no mask for this step

steps by process area

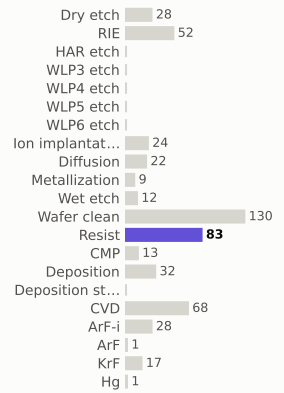

materials deposited (g)



gases emitted (g)

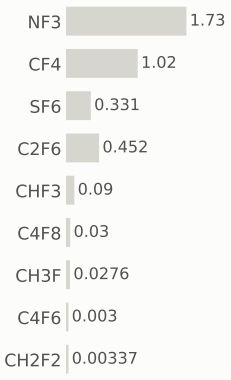

Step #6740: ArF-i

litho_patterning · ArF-i

0.217	310.6	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

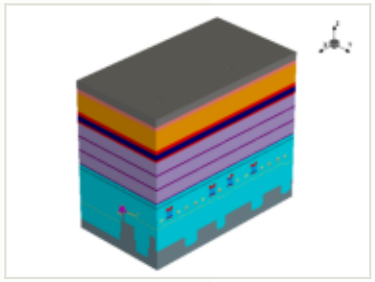

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

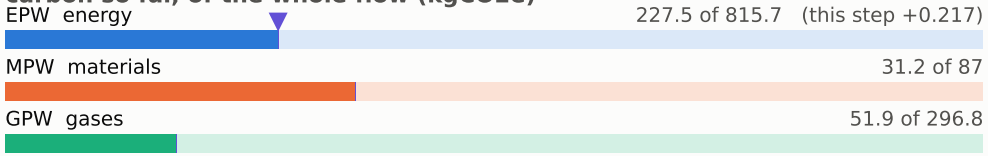

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

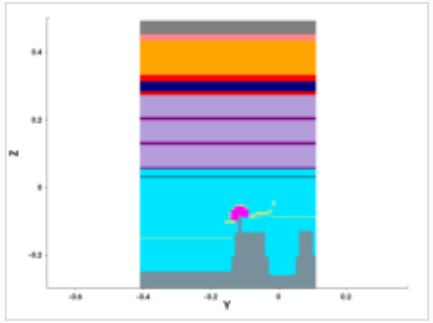

y cut at -0.150 µm

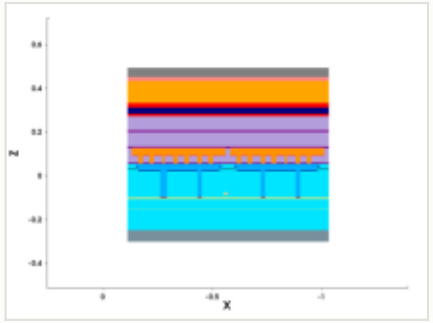

mask: layer 2025:0 (GDSII)

steps by process area

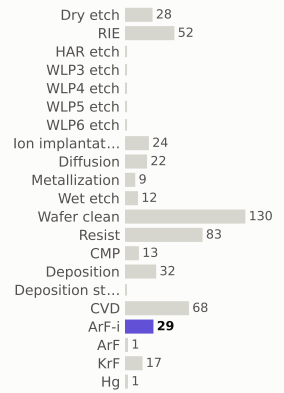

materials deposited (g)

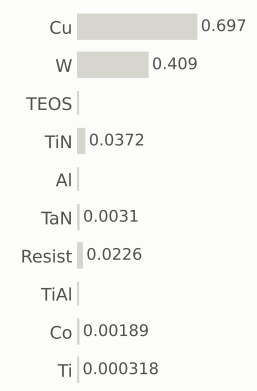

gases emitted (g)

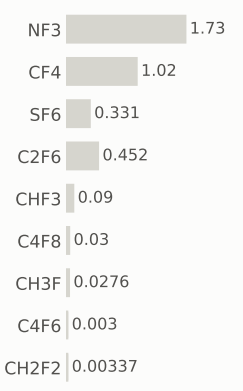

Step #6750: RIE

etch_anisotropic · RIE

1.04	311.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

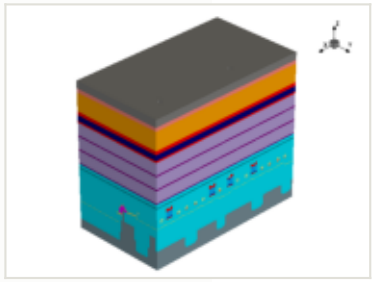

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

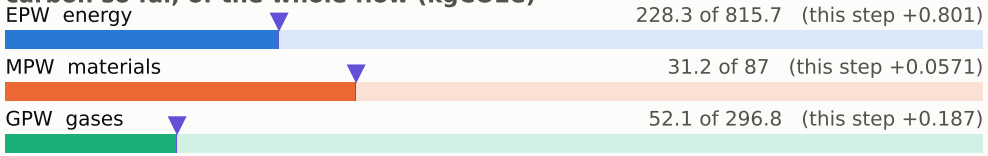

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

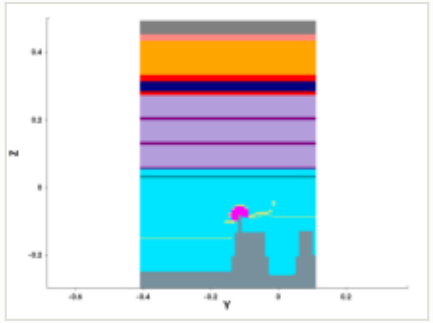

y cut at -0.150 µm

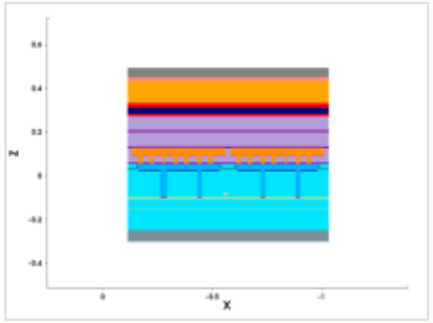

mask for this step

no mask for this step

steps by process area

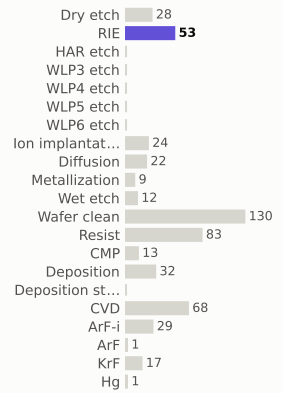

materials deposited (g)

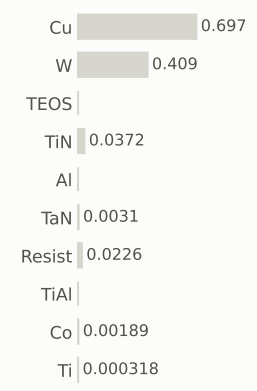

gases emitted (g)

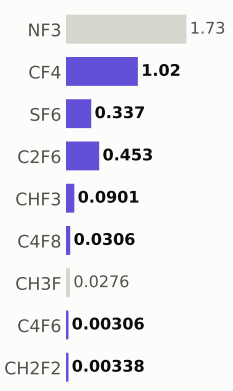

Step #6760: Wafer_clean

clean · Wafer_clean

0.169	311.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

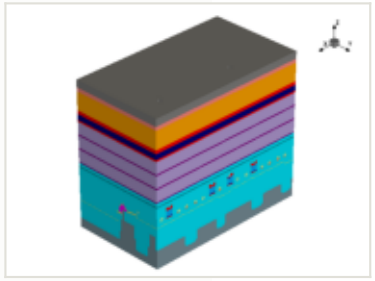

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

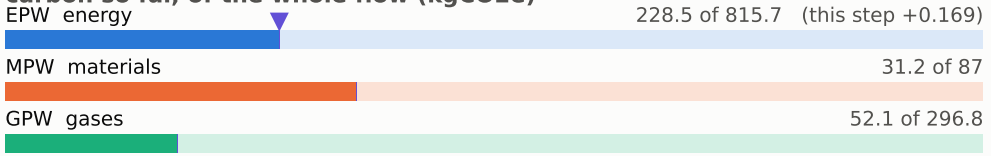

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

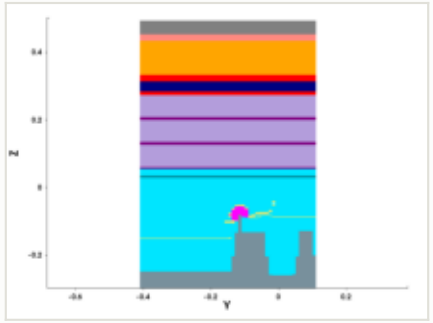

y cut at -0.150 µm

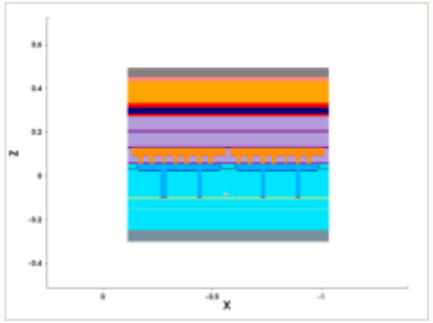

mask for this step

no mask for this step

steps by process area

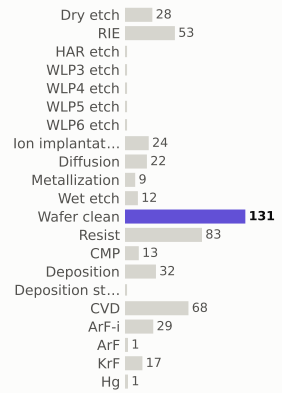

materials deposited (g)

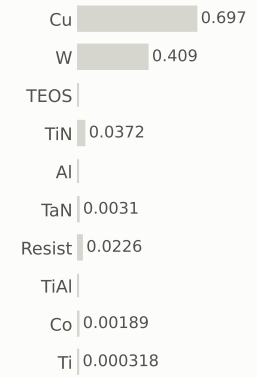

gases emitted (g)

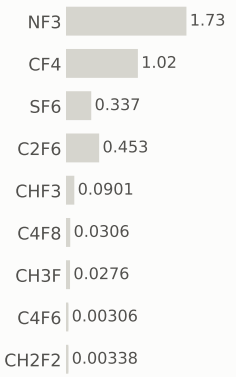

Step #6770: Resist

depo_fill · Resist

0.169	312.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

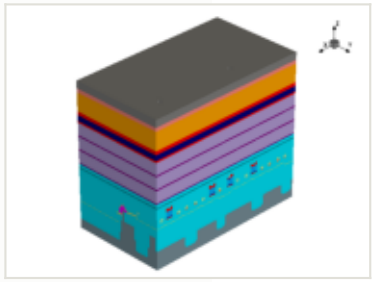

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

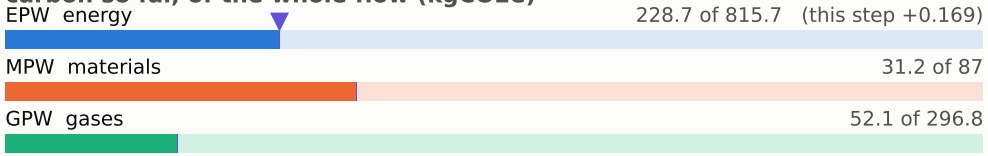

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

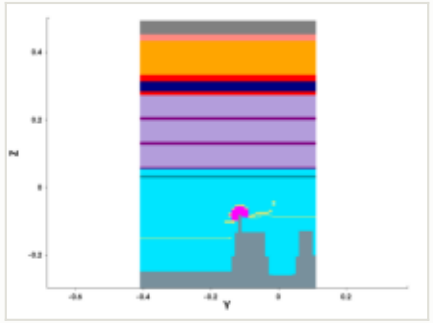

y cut at -0.150 µm

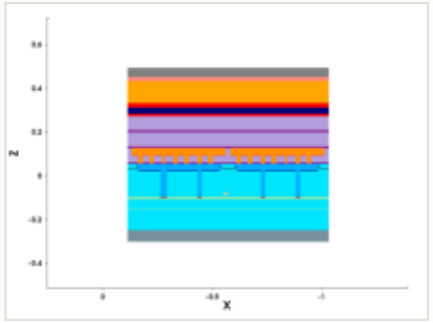

mask for this step

no mask for this step

steps by process area

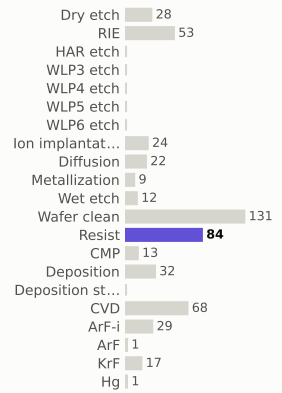

materials deposited (g)

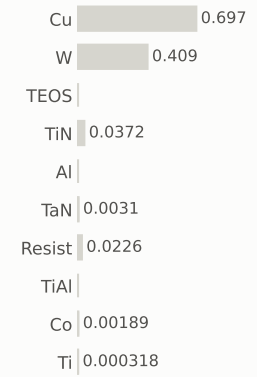

gases emitted (g)

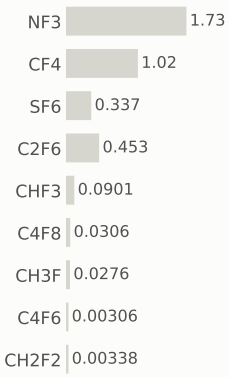

Step #6780: CVD

depo_isotropic · CVD

1.31	313.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

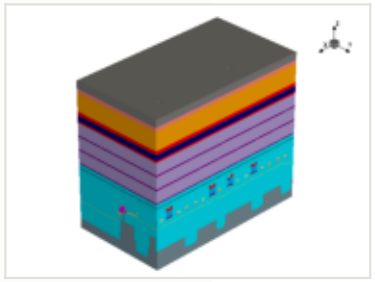

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

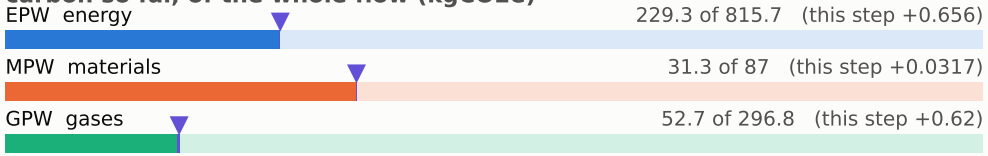

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

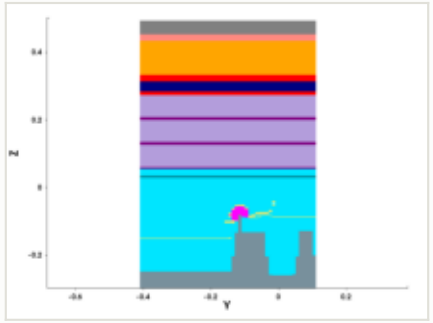

y cut at -0.150 µm

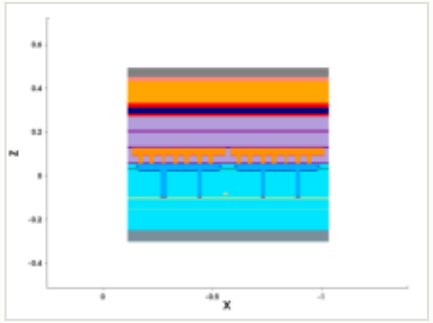

mask for this step

no mask for this step

steps by process area

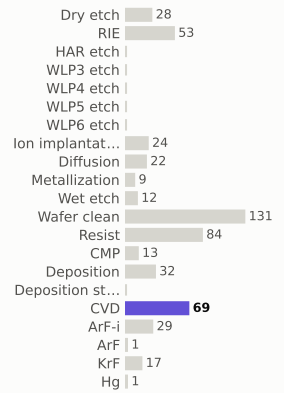

materials deposited (g)

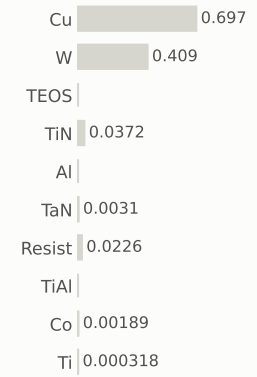

gases emitted (g)

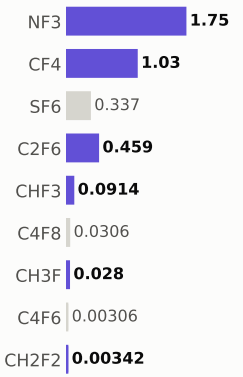

Step #6790: Wafer_clean

clean · Wafer_clean

0.169	313.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

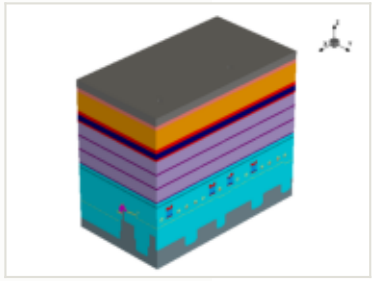

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

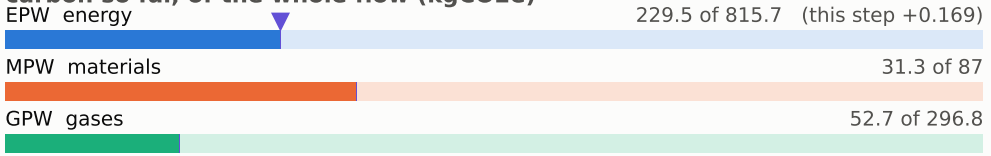

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

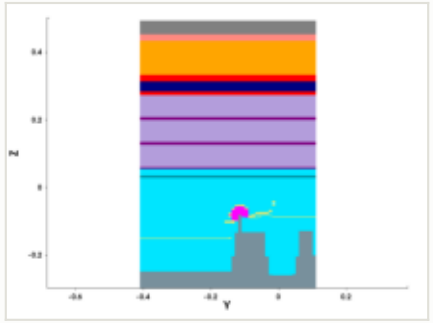

y cut at -0.150 µm

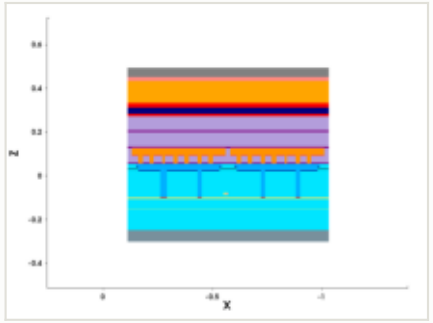

mask for this step

no mask for this step

steps by process area

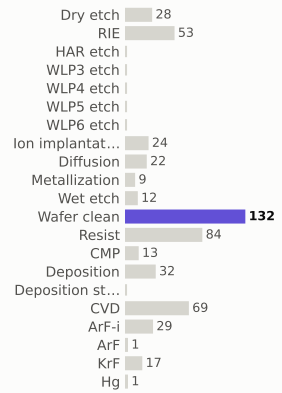

materials deposited (g)

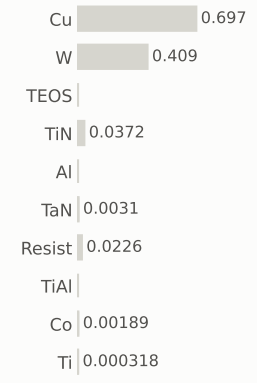

gases emitted (g)

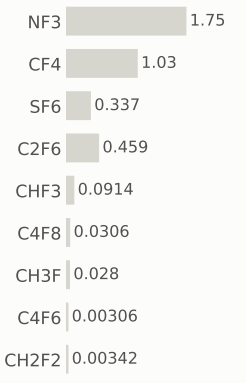

Step #6800: Resist

resist · Resist

0.169	313.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

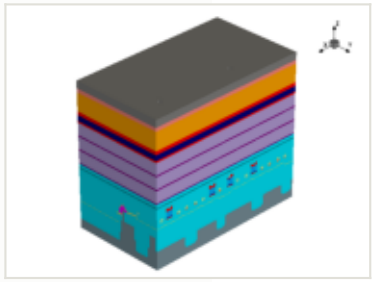

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

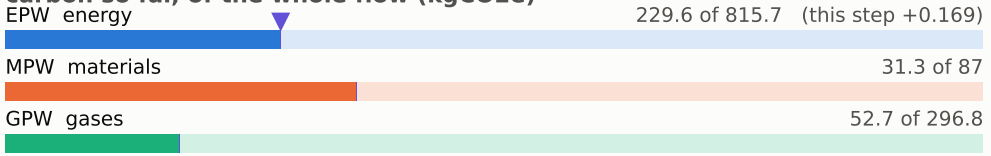

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

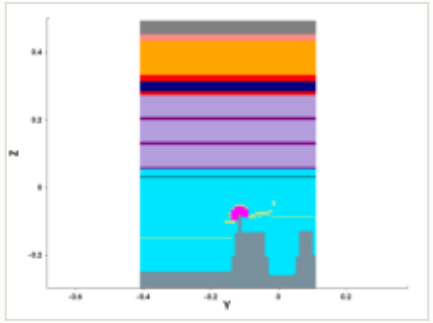

y cut at -0.150 µm

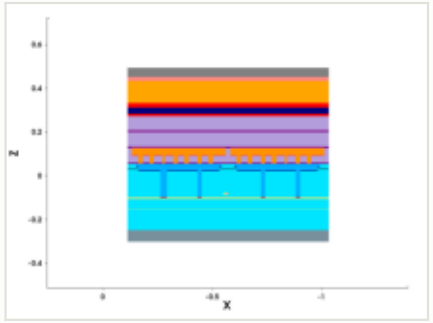

mask for this step

no mask for this step

steps by process area

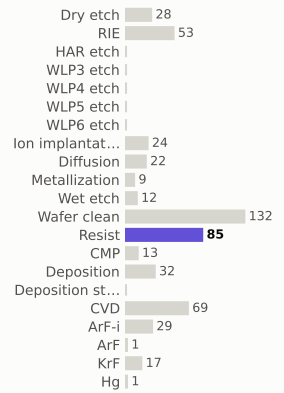

materials deposited (g)



gases emitted (g)

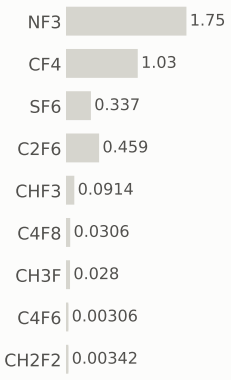

Step #6810: ArF-i

litho_patterning · ArF-i

0.217	313.8	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

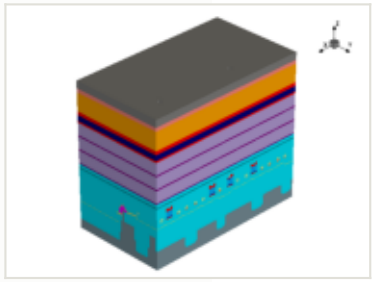

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

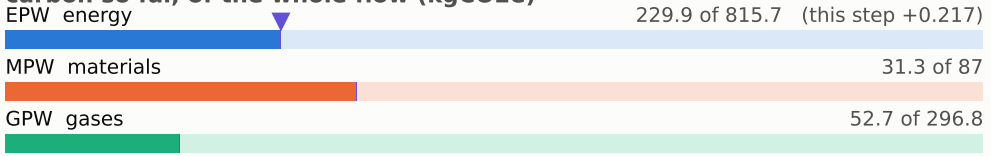

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

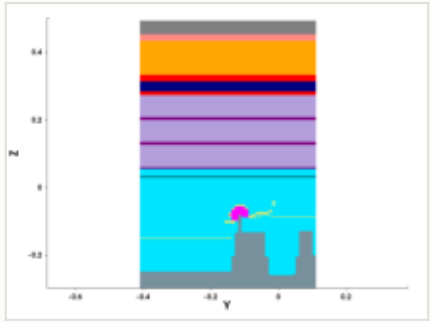

y cut at -0.150 µm

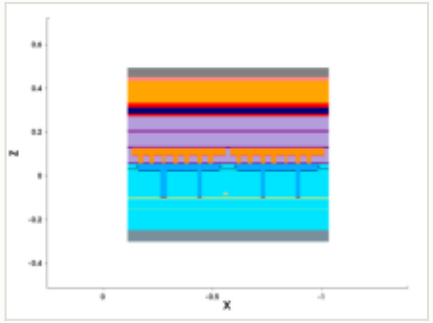

mask: layer 2100:0, positive (GDSII)

steps by process area

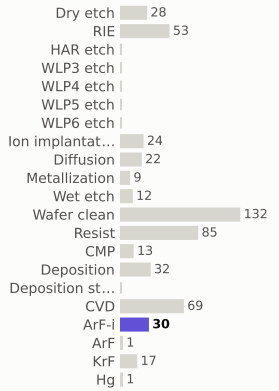

materials deposited (g)

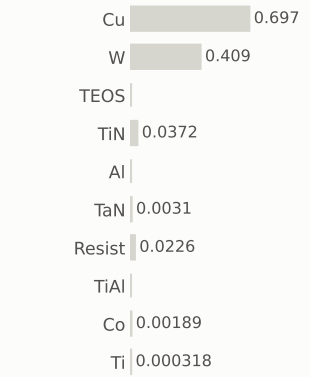

gases emitted (g)

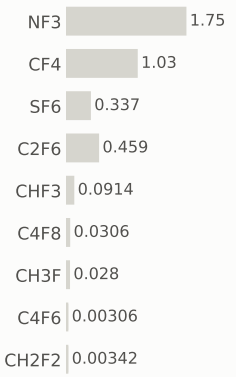

Step #6820: RIE

etch_strip · RIE

1.04	314.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

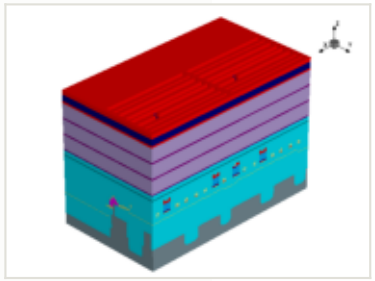

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

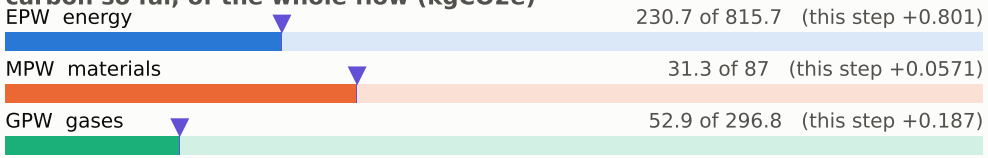

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

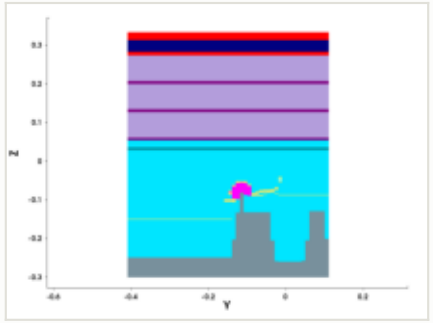

y cut at -0.150 µm

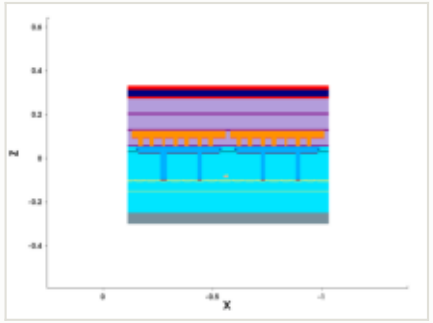

mask for this step

no mask for this step

steps by process area

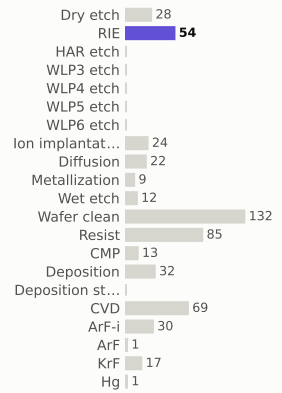

materials deposited (g)

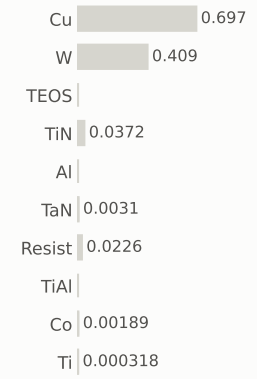

gases emitted (g)

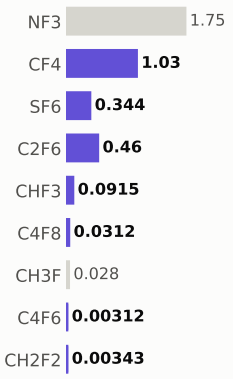

Step #6830: Wafer_clean

clean · Wafer_clean

0.169	315.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

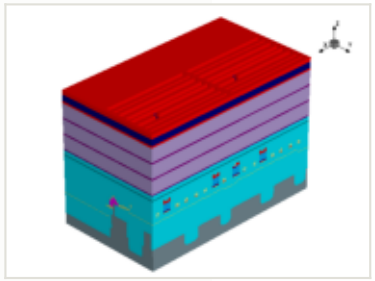

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

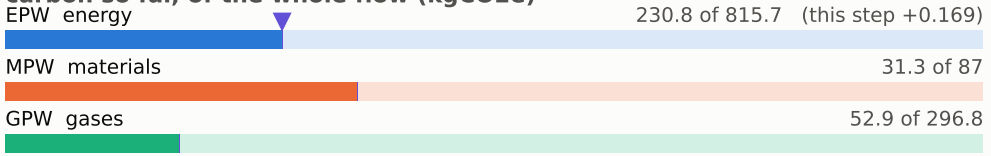

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

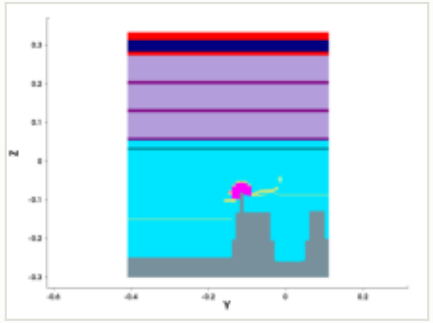

y cut at -0.150 µm

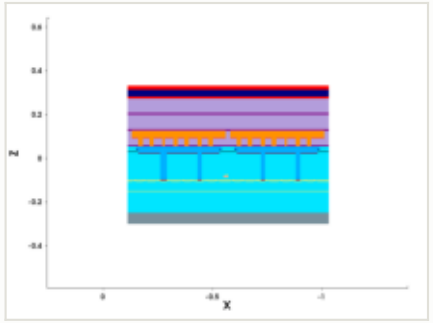

mask for this step

no mask for this step

steps by process area

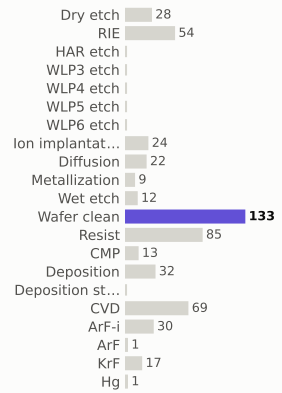

materials deposited (g)



gases emitted (g)

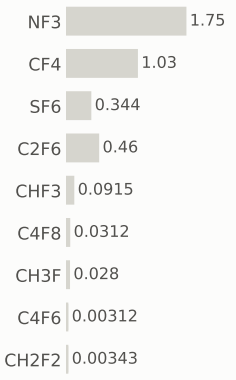

Step #6840: RIE

etch_anisotropic · RIE

1.04	316.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

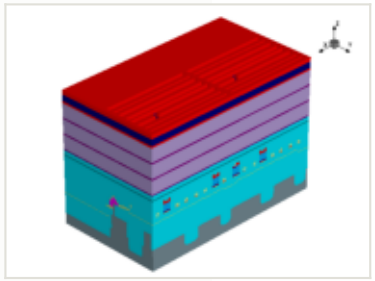

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

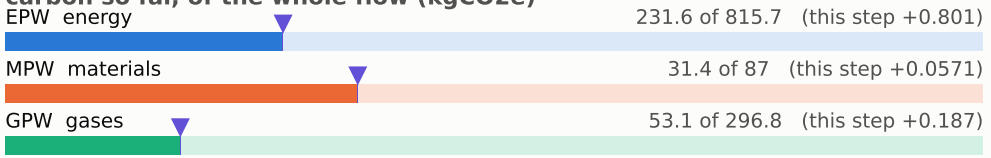

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

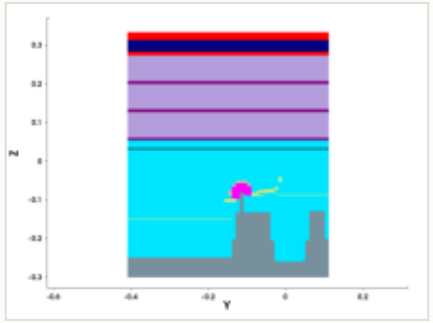

y cut at -0.150 µm

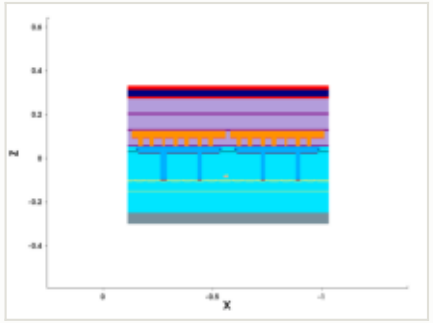

mask for this step

no mask for this step

steps by process area

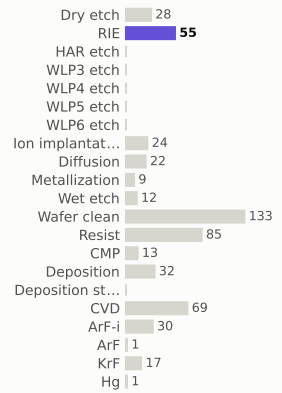

materials deposited (g)

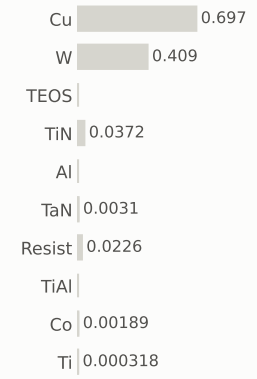

gases emitted (g)

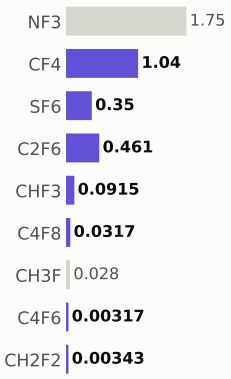

Step #6850: Wafer_clean

clean · Wafer_clean

0.169	316.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

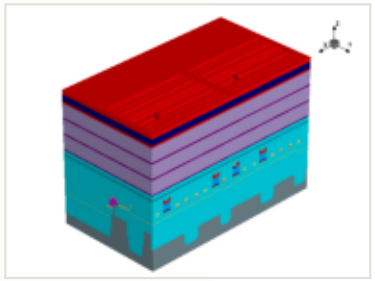

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

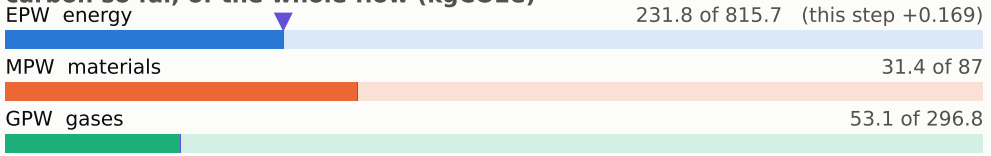

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

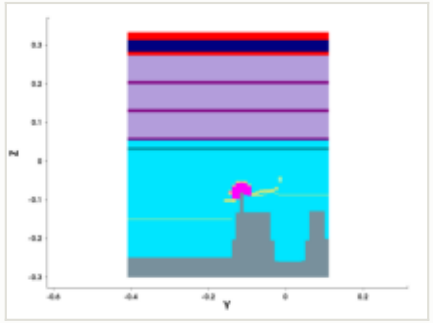

y cut at -0.150 µm

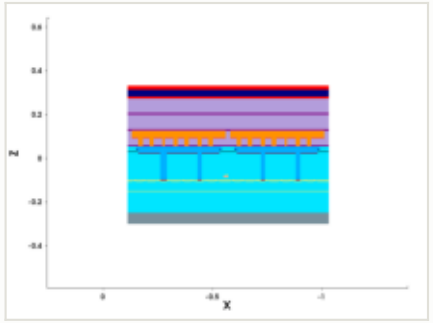

mask for this step

no mask for this step

steps by process area

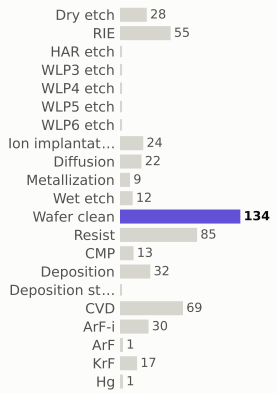

materials deposited (g)

gases emitted (g)

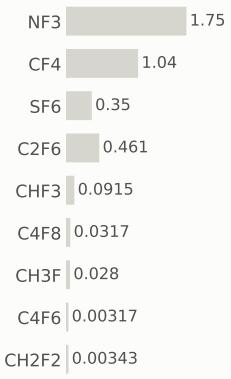

Step #6860: Metallization

depo_ellipsoidal · Metallization

1.2	317.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

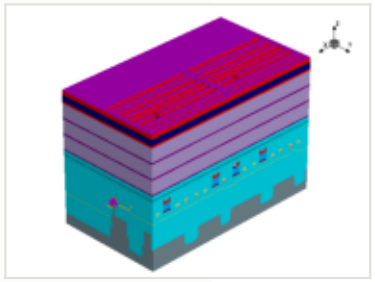

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

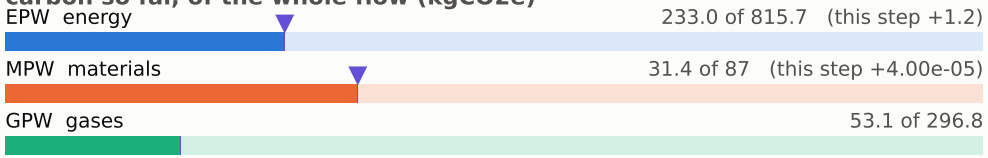

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

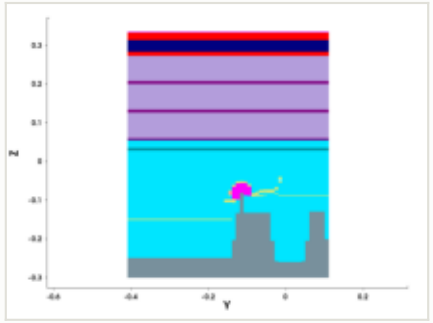

y cut at -0.150 µm

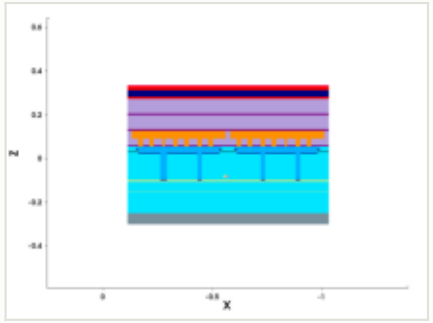

mask for this step

no mask for this step

steps by process area

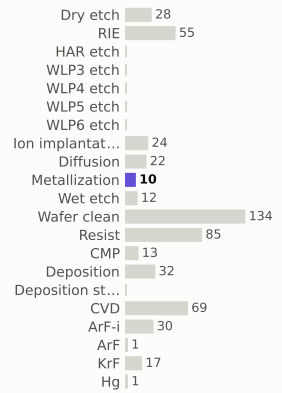

materials deposited (g)



gases emitted (g)

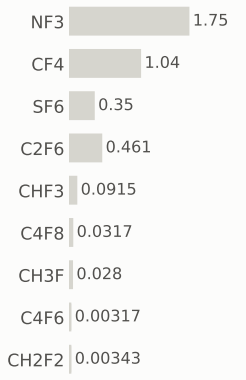

Step #6870: Metallization

depo_fill · Metallization

1.21	318.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

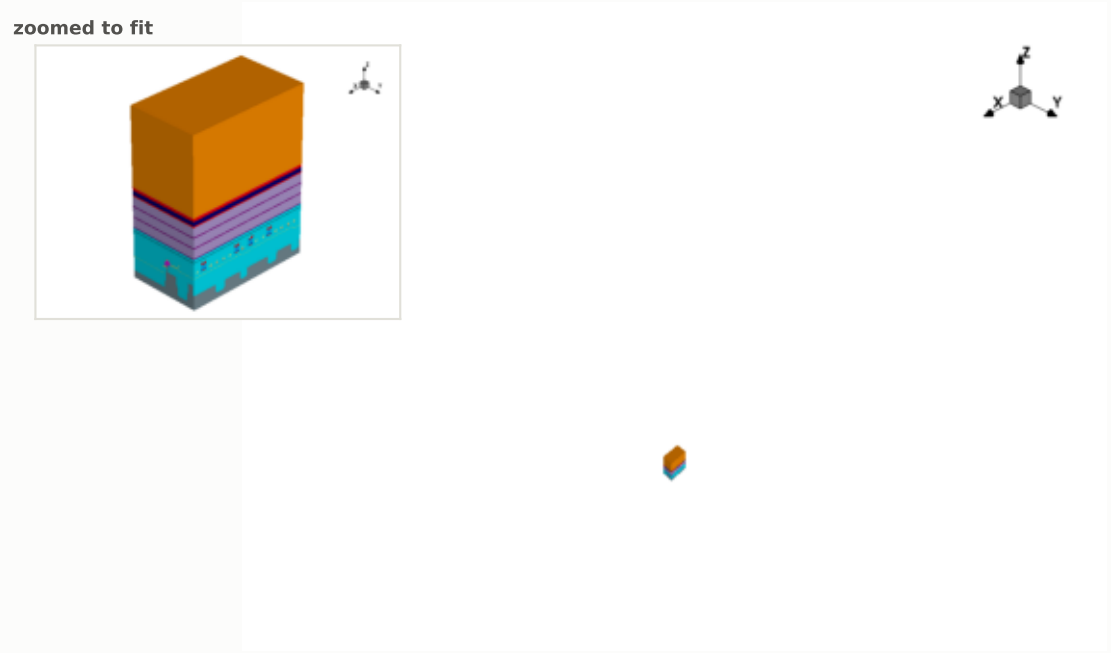

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

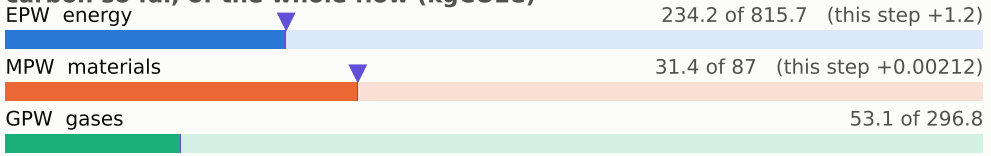

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

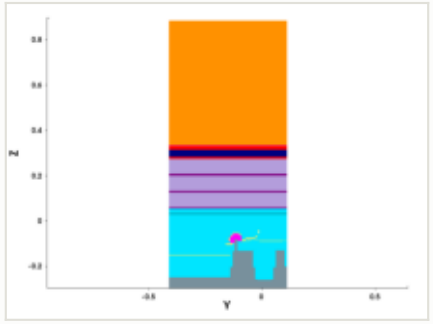

y cut at -0.150 µm

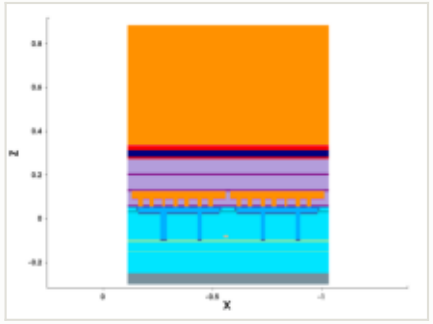

mask for this step

no mask for this step

steps by process area

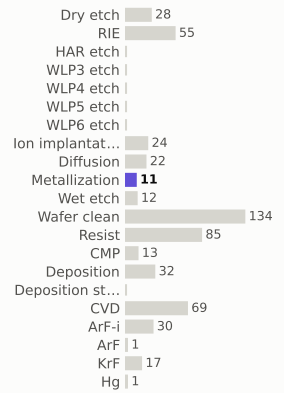

materials deposited (g)

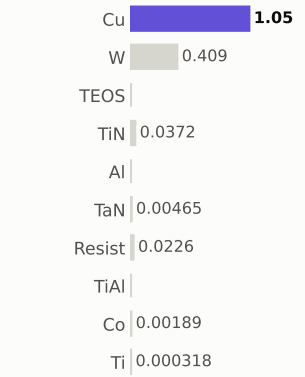

gases emitted (g)

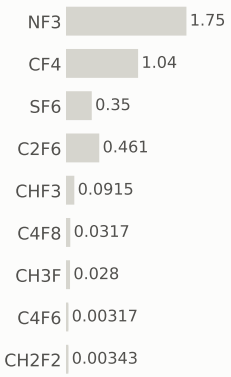

Step #6880: Diffusion

anneal · Diffusion

0.801	319.5	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

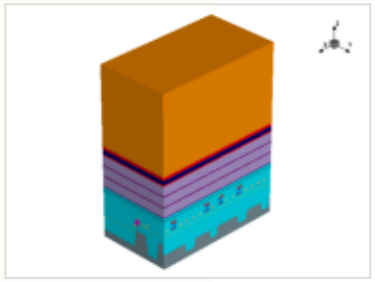

x cut at -0.570 µm

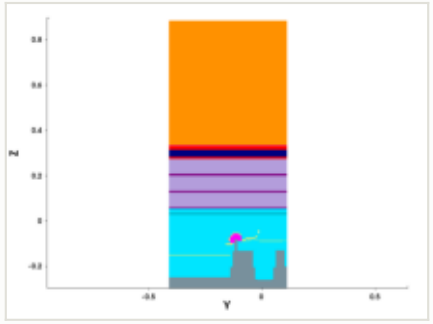

y cut at -0.150 µm

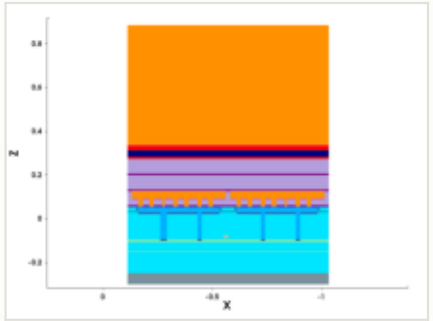

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

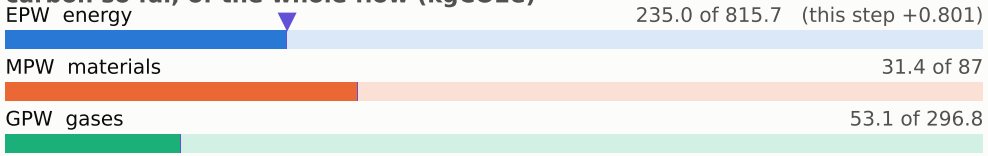

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

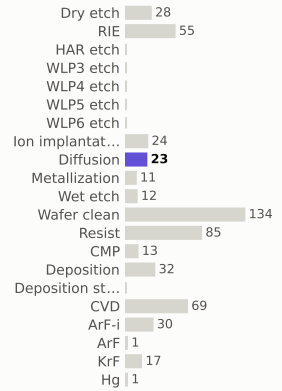

materials deposited (g)

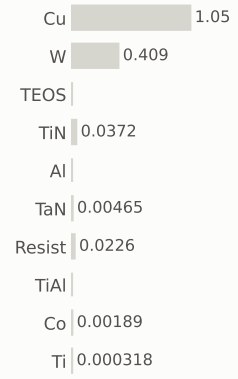

gases emitted (g)

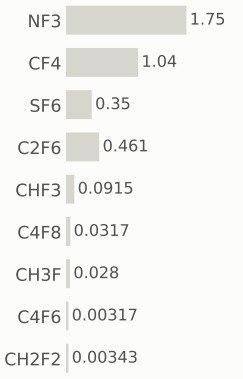

Step #6890: CMP

etch_cmp · CMP

0.169	319.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

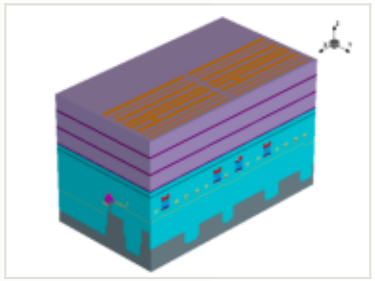

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

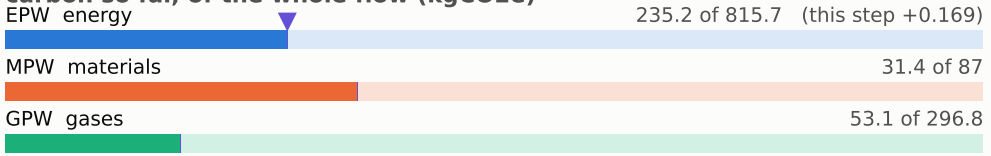

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

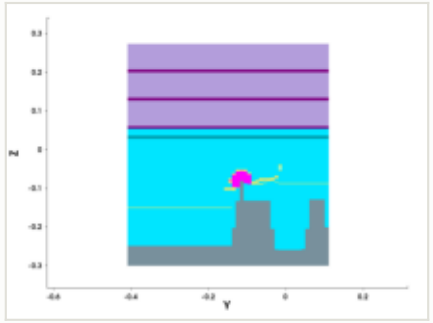

y cut at -0.150 µm

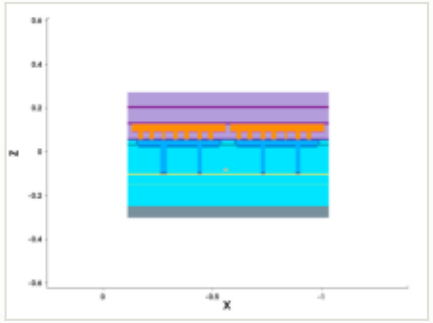

mask for this step

no mask for this step

steps by process area

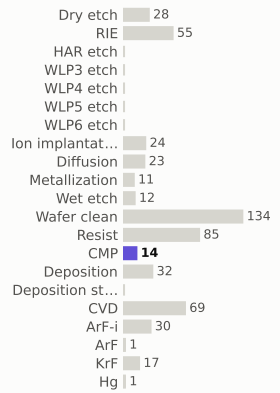

materials deposited (g)

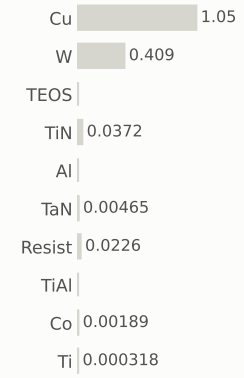

gases emitted (g)

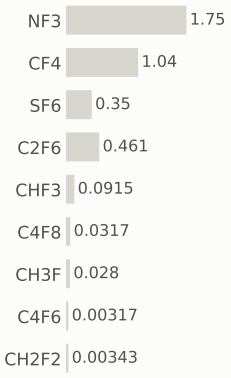

Step #6900: Wafer_clean

clean · Wafer_clean

0.169	319.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

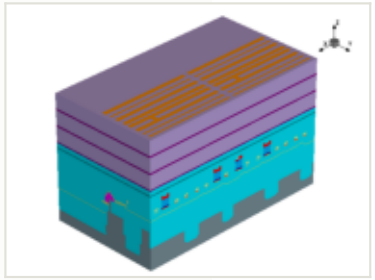

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

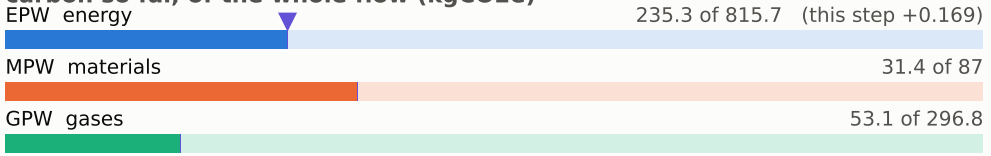

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

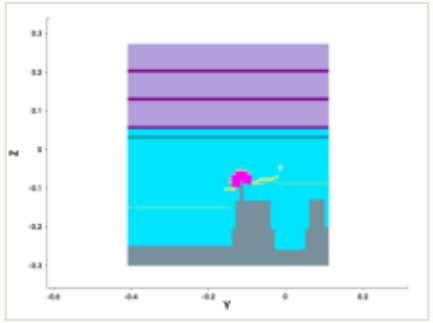

y cut at -0.150 µm

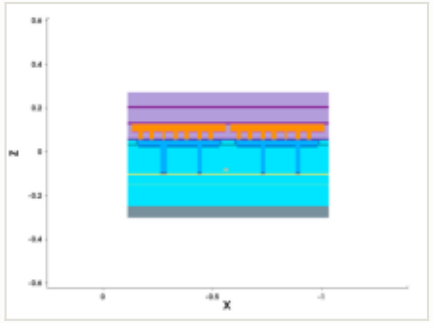

mask for this step

no mask for this step

steps by process area

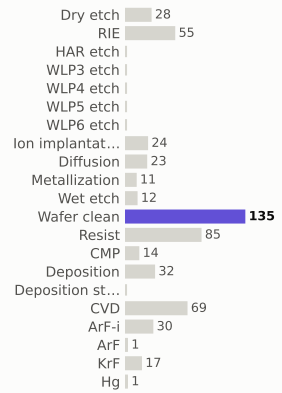

materials deposited (g)

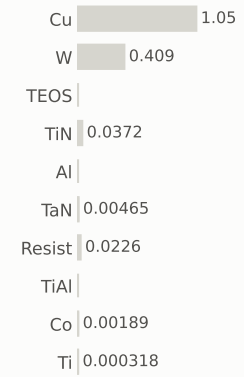

gases emitted (g)

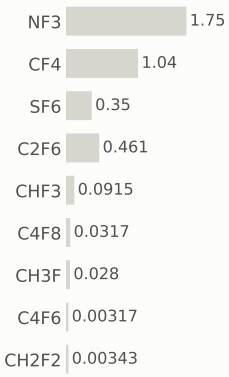

Step #6910: Metallization

depo_isotropic · Metallization

1.2	321.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

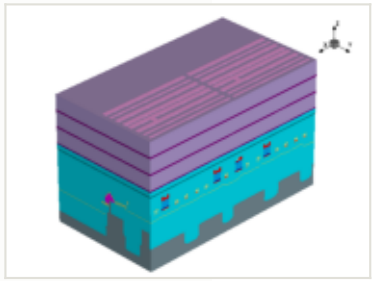

this step

process area	Metallization
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

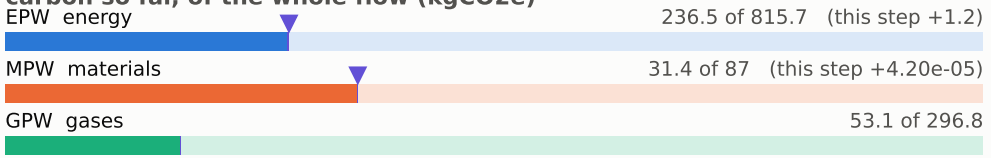

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

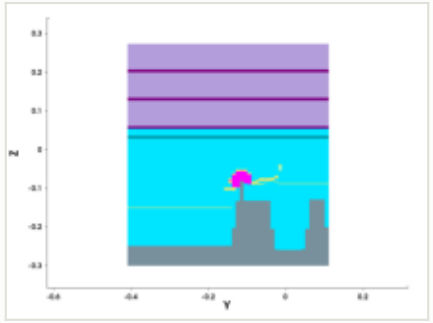

y cut at -0.150 µm

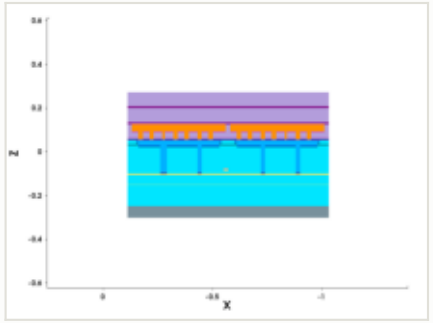

mask for this step

no mask for this step

steps by process area

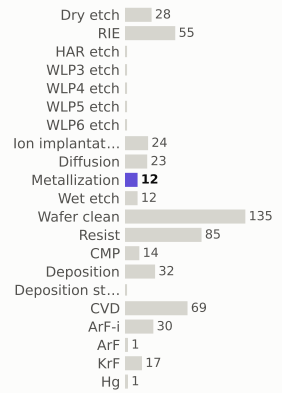

materials deposited (g)

gases emitted (g)

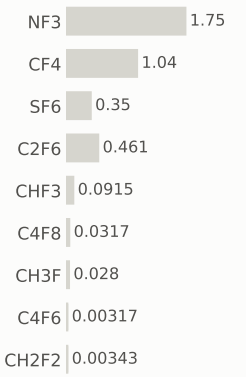

Step #6930: Deposition

depo_fill · Deposition

0.656	321.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

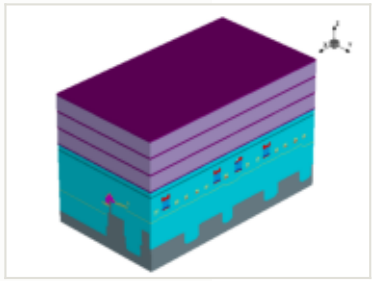

this step

process area	Deposition
material	—
thickness	0.006 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

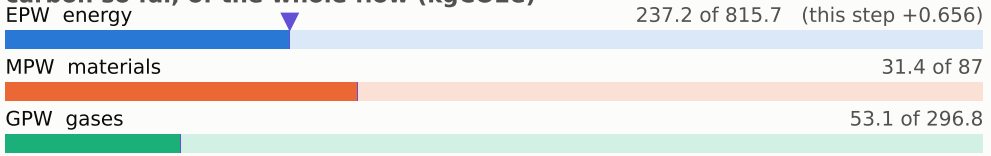

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

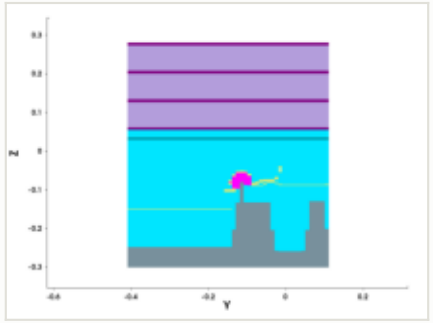

y cut at -0.150 µm

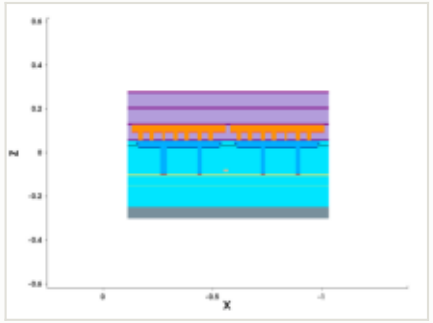

mask for this step

no mask for this step

steps by process area

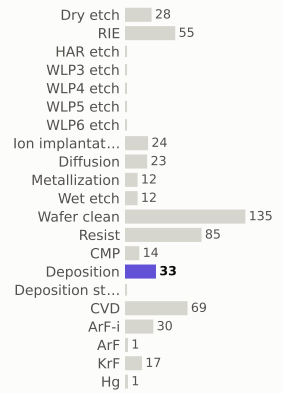

materials deposited (g)

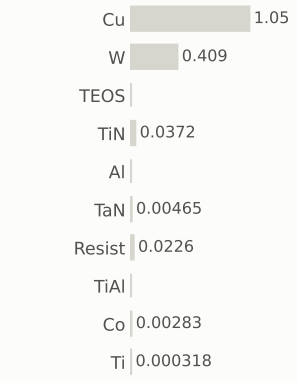

gases emitted (g)

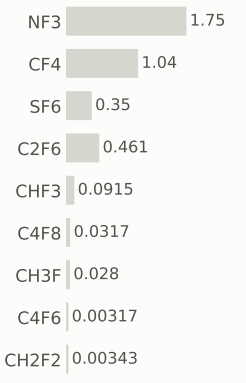

Step #6940: CVD

depo_fill · CVD

1.31	323.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

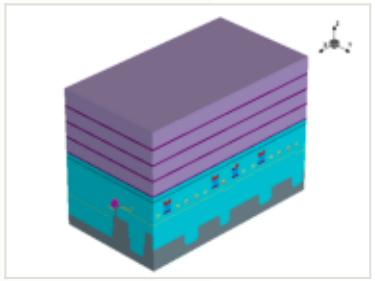

this step

process area	CVD
material	—
thickness	0.078 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

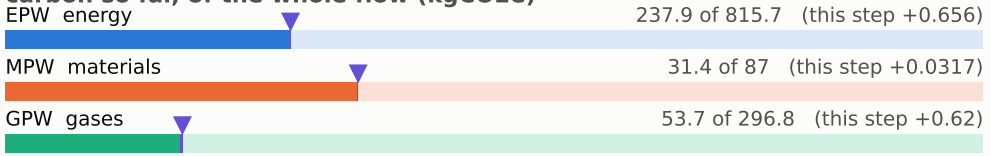

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

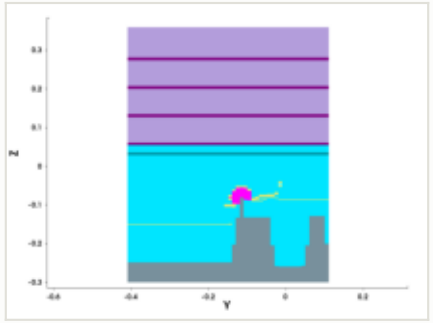

y cut at -0.150 µm

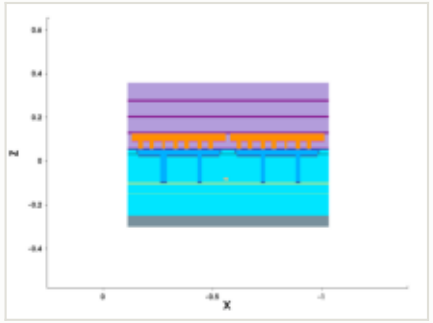

mask for this step

no mask for this step

steps by process area

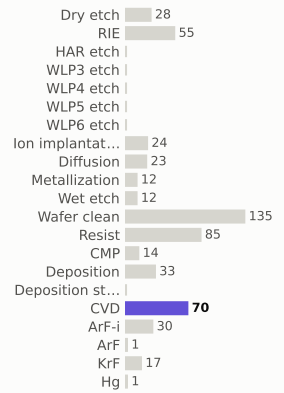

materials deposited (g)

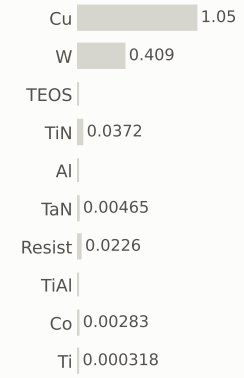

gases emitted (g)

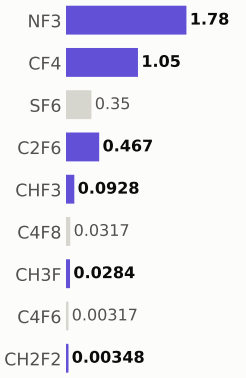

Step #6950: Diffusion

anneal · Diffusion

0.801	323.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

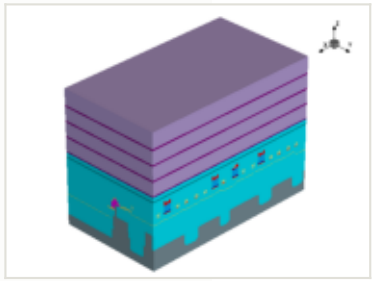

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

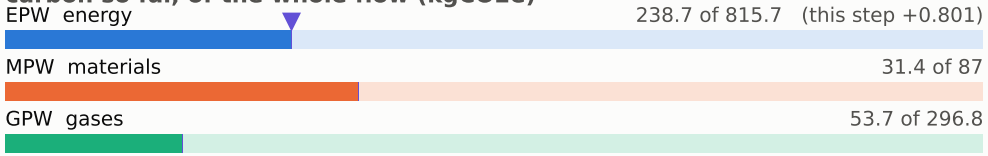

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

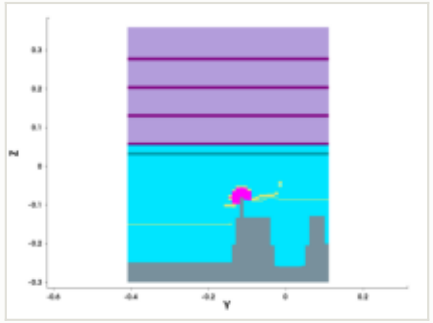

y cut at -0.150 µm

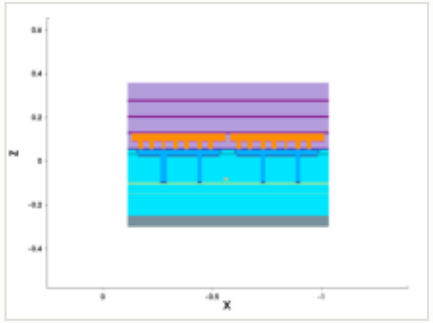

mask for this step

no mask for this step

steps by process area

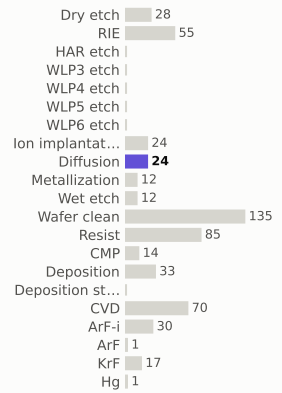

materials deposited (g)

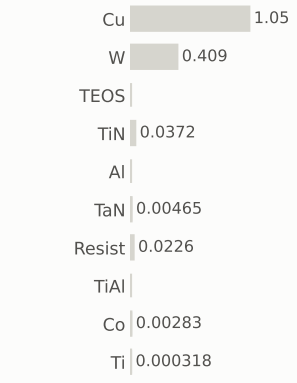

gases emitted (g)

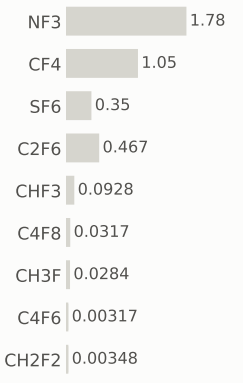

Step #6960: Wafer_clean

clean · Wafer_clean

0.169	324.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

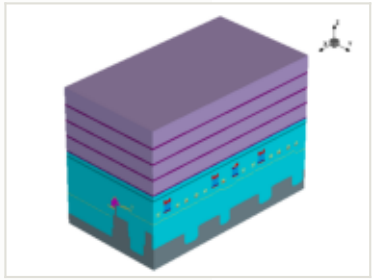

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

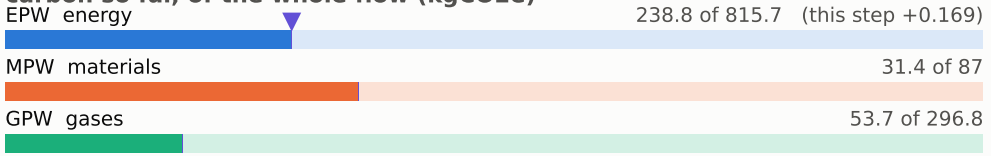

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

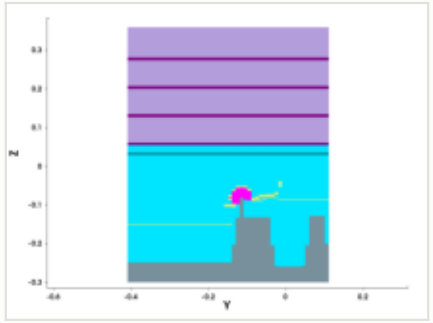

y cut at -0.150 µm

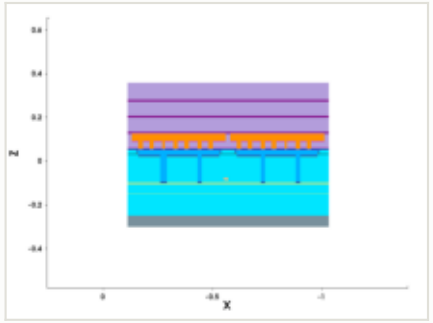

mask for this step

no mask for this step

steps by process area

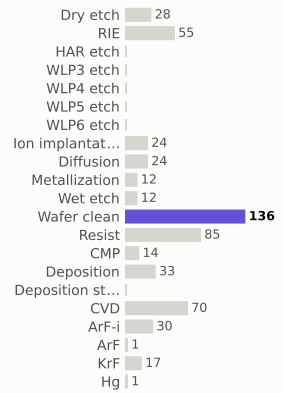

materials deposited (g)

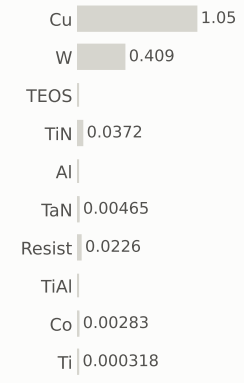

gases emitted (g)

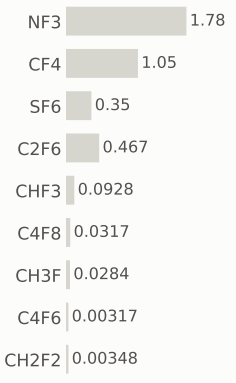

Step #6970: CVD

depo_fill · CVD

1.31	325.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

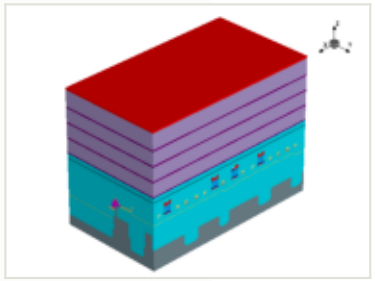

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

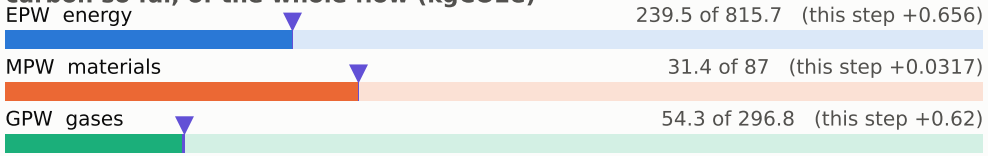

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

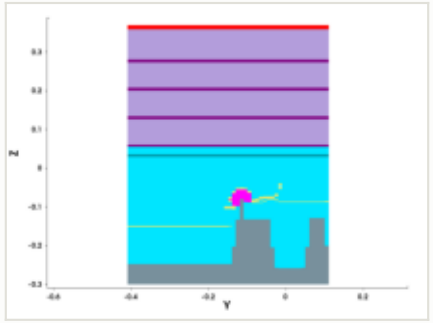

y cut at -0.150 µm

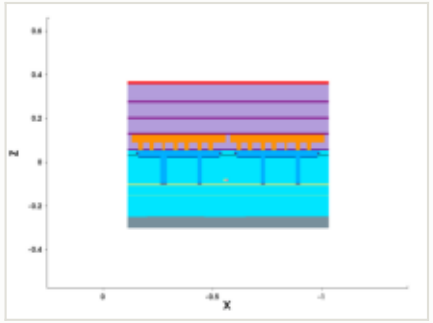

mask for this step

no mask for this step

steps by process area

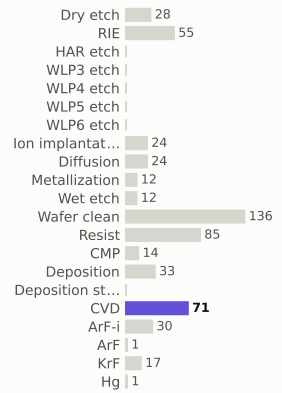

materials deposited (g)

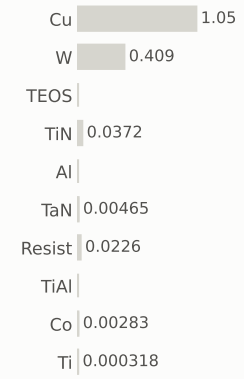

gases emitted (g)

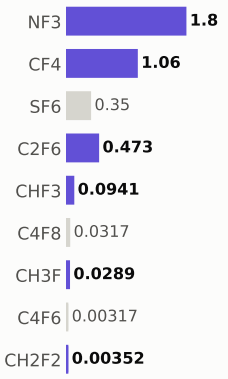

Step #6980: Deposition

depo_fill · Deposition

0.657	325.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

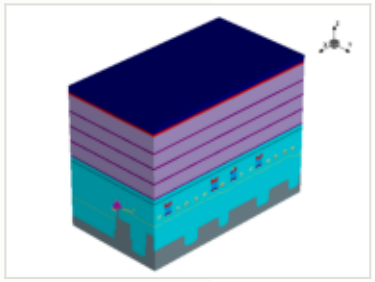

this step

process area	Deposition	EPW	0.656 kgCO2e
material	TiN	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	43.9778 gCO2e/g	MPW	0.000486 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.657 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

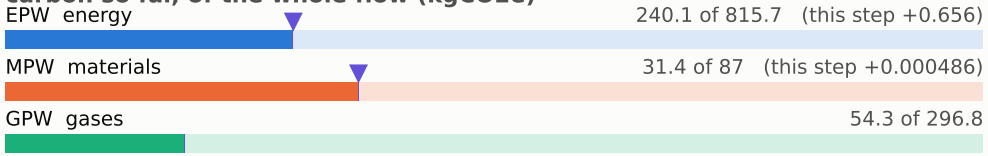

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

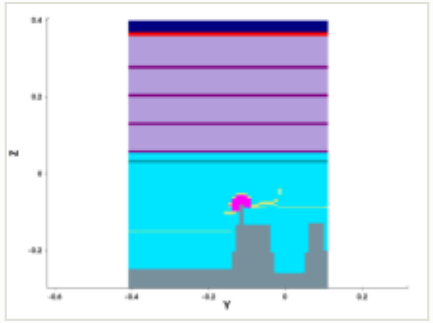

y cut at -0.150 µm

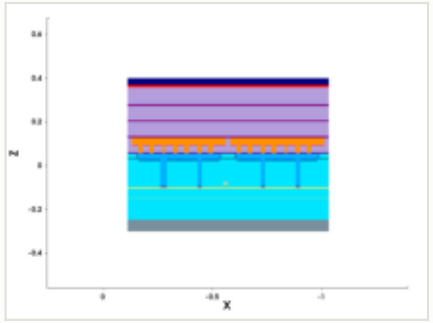

mask for this step

no mask for this step

steps by process area

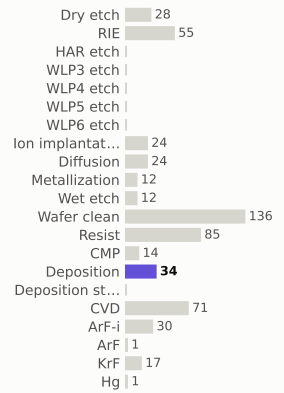

materials deposited (g)

gases emitted (g)

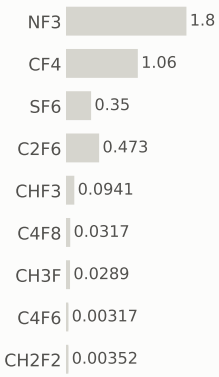

Step #6990: Wafer_clean

clean · Wafer_clean

0.169	326.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

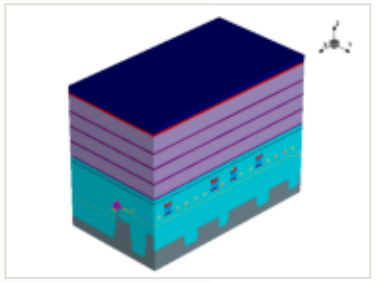

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

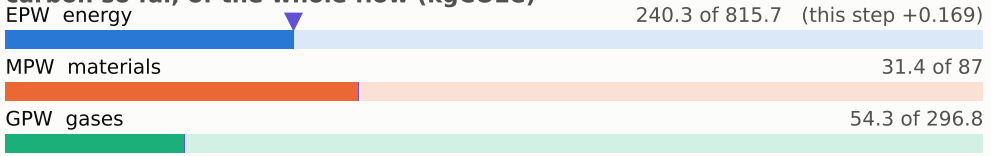

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

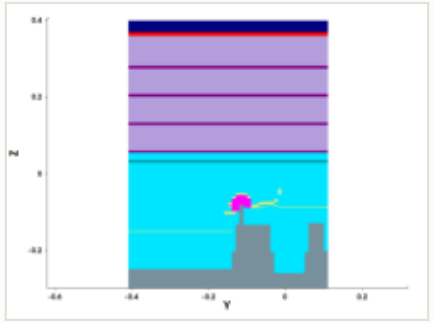

y cut at -0.150 µm

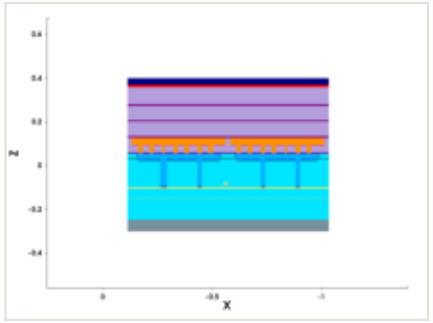

mask for this step

no mask for this step

steps by process area

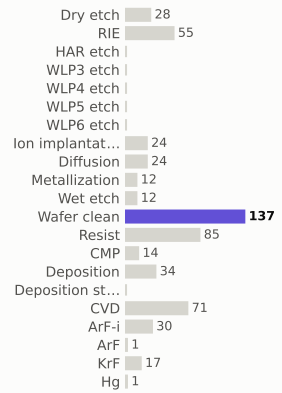

materials deposited (g)

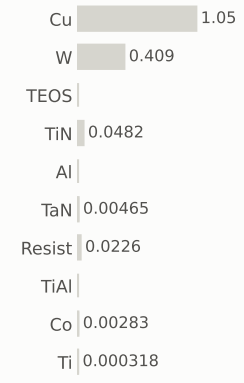

gases emitted (g)



Step #7000: CVD

depo_fill · CVD

1.31	327.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

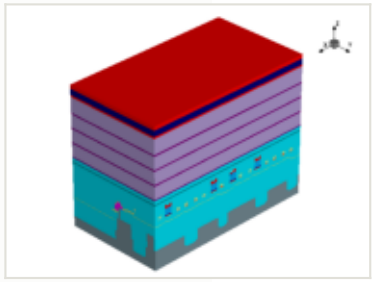

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

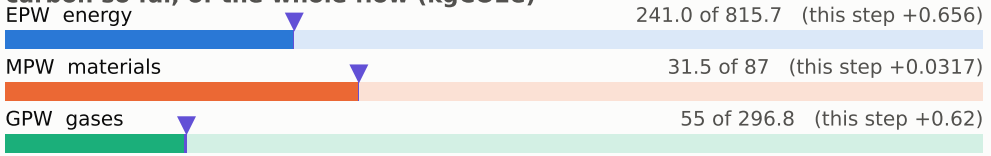

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

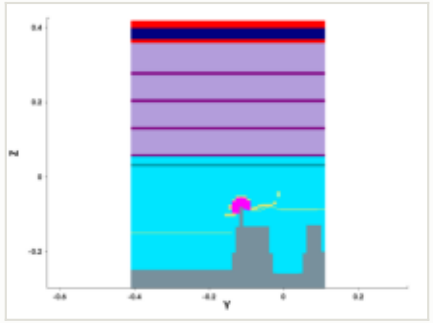

y cut at -0.150 µm

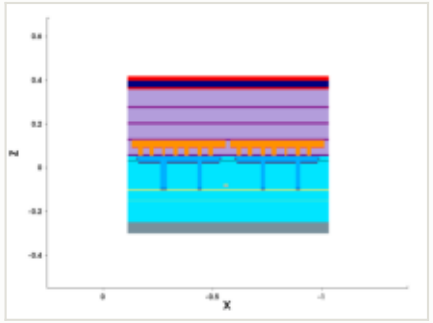

mask for this step

no mask for this step

steps by process area

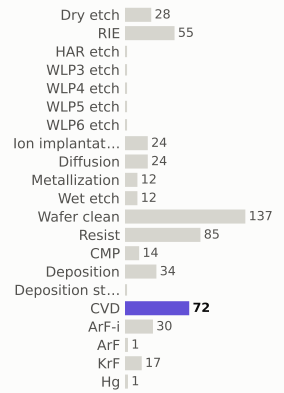

materials deposited (g)

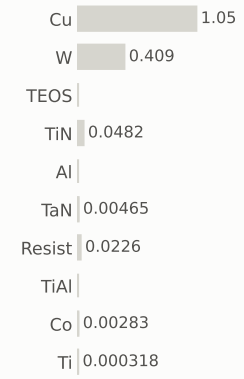

gases emitted (g)

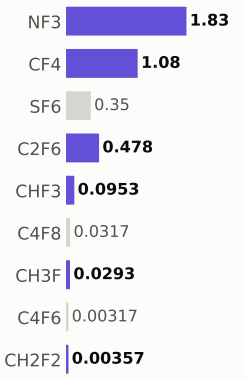

Step #7010: Spx_only

depo_fill · Spx_only

0	327.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

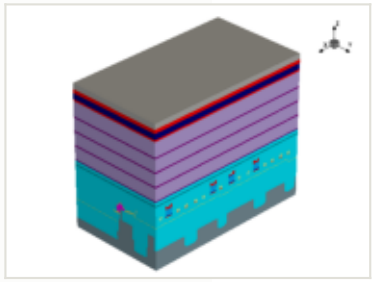

x cut at -0.570 µm

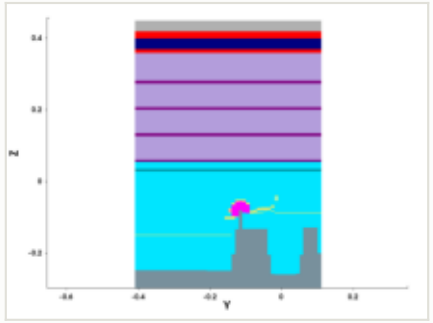

y cut at -0.150 µm

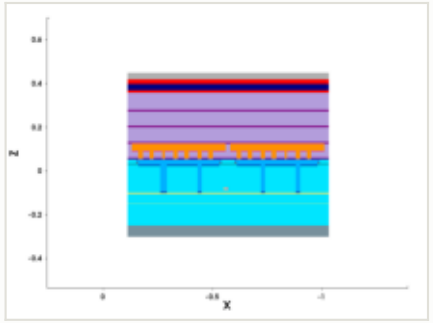

mask for this step

no mask for this step

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.03 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

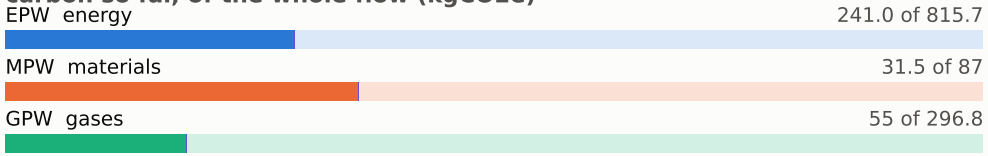

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

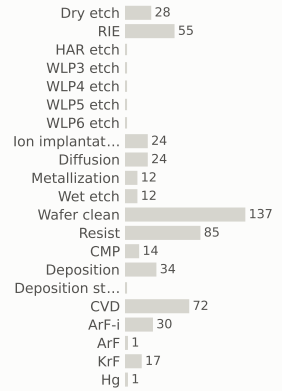

materials deposited (g)

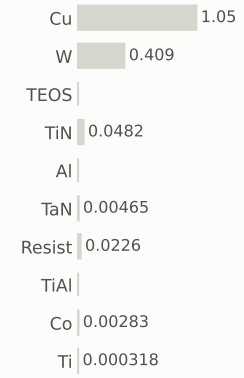

gases emitted (g)

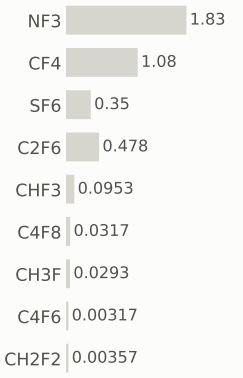

Step #7020: Resist

depo_fill · Resist

0.169	327.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

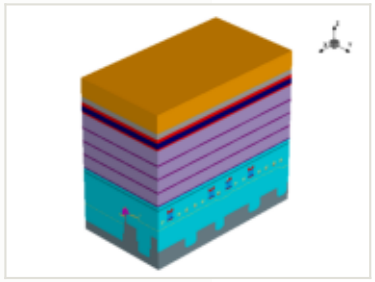

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

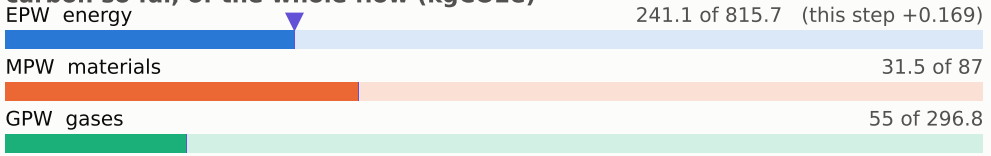

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

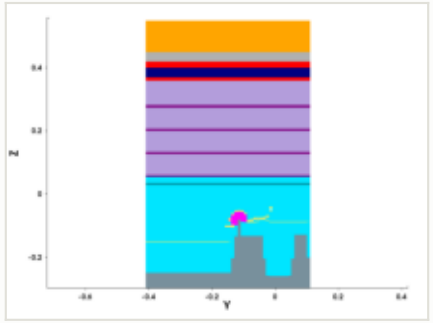

y cut at -0.150 µm

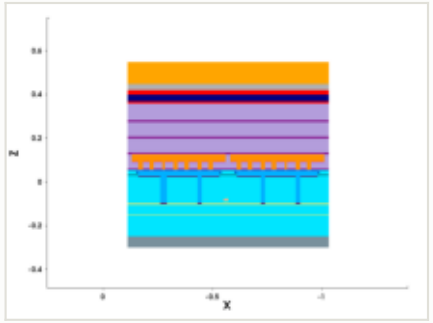

mask for this step

no mask for this step

steps by process area

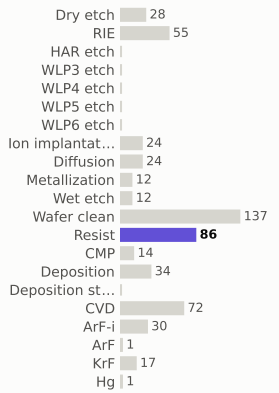

materials deposited (g)

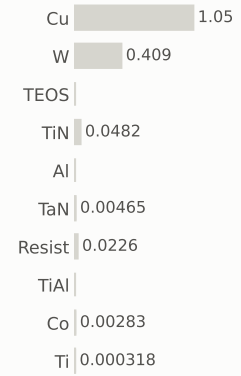

gases emitted (g)

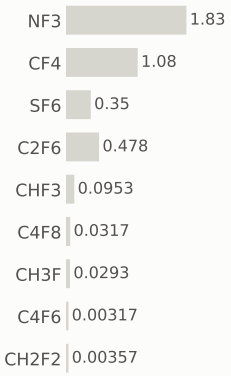

Step #7030: CVD

depo_fill · CVD

1.31	328.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

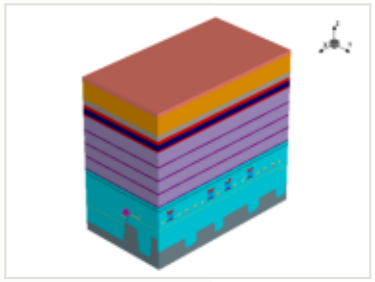

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

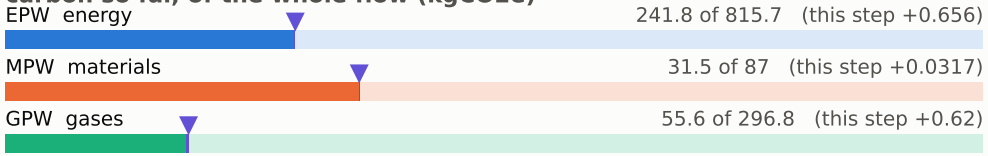

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

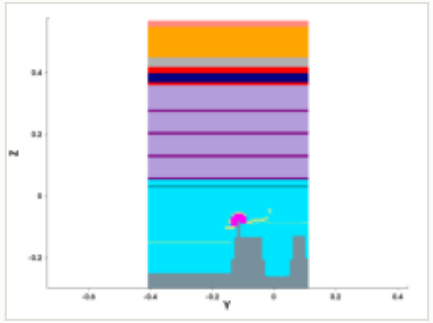

y cut at -0.150 µm

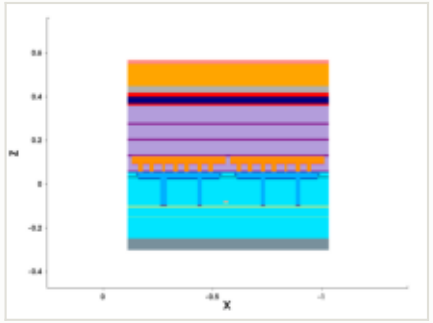

mask for this step

no mask for this step

steps by process area

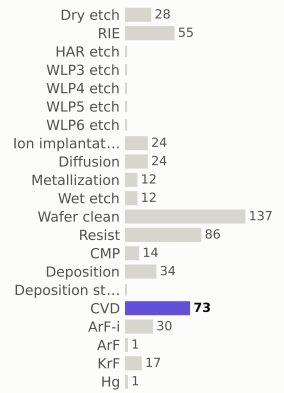

materials deposited (g)

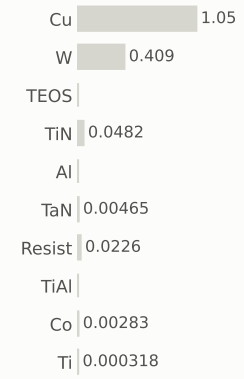

gases emitted (g)

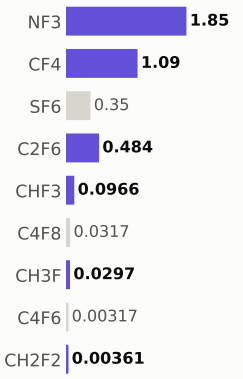

Step #7040: Wafer_clean

clean · Wafer_clean

0.169	329.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

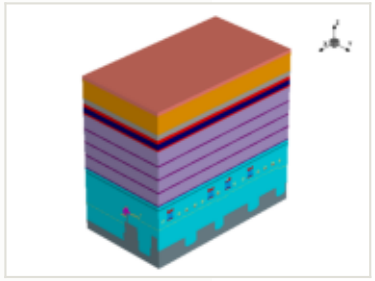

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

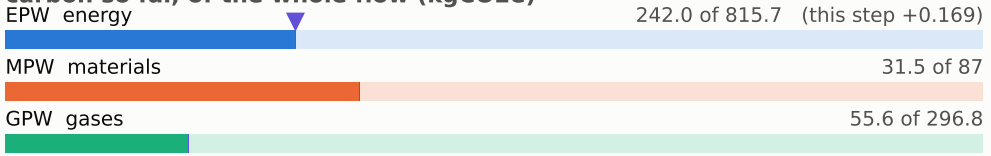

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

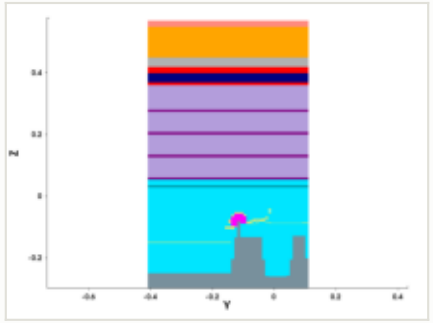

y cut at -0.150 µm

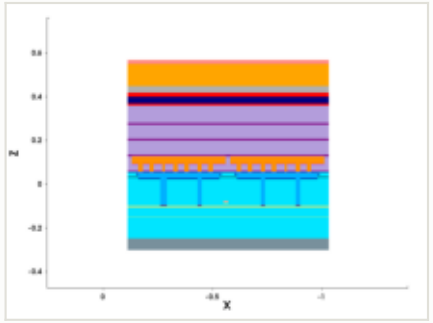

mask for this step

no mask for this step

steps by process area

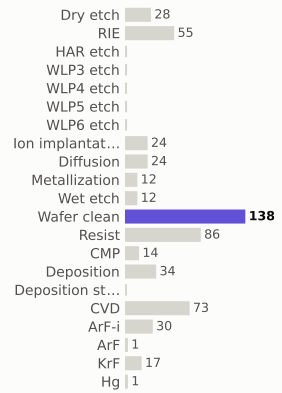

materials deposited (g)

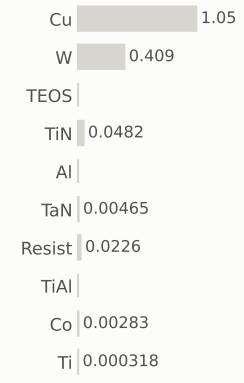

gases emitted (g)

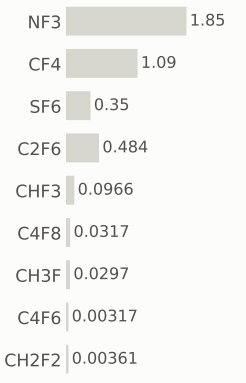

Step #7050: Resist

resist · Resist

0.169	329.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

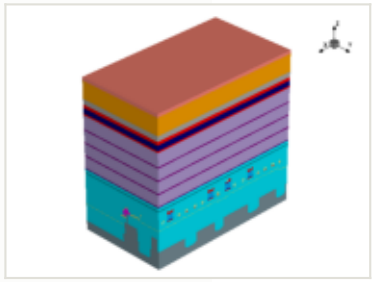

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

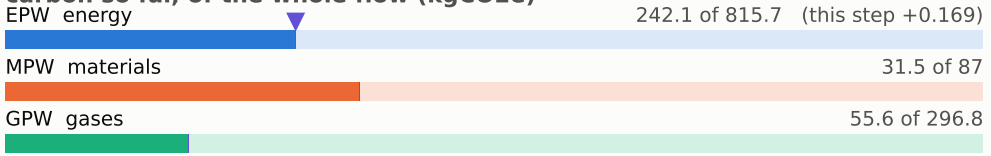

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

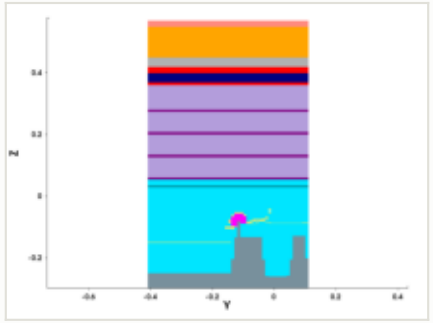

y cut at -0.150 µm

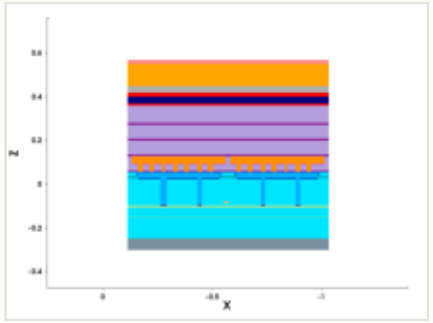

mask for this step

no mask for this step

steps by process area

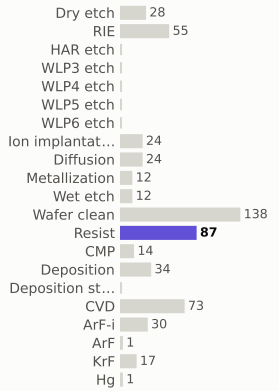

materials deposited (g)

gases emitted (g)

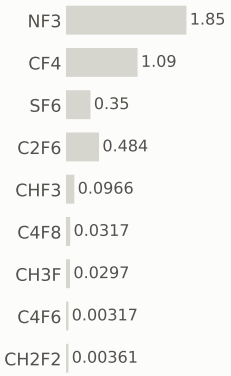

Step #7060: ArF-i

litho_patterning · ArF-i

0.217	329.4	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

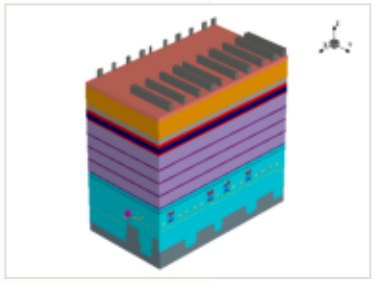

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

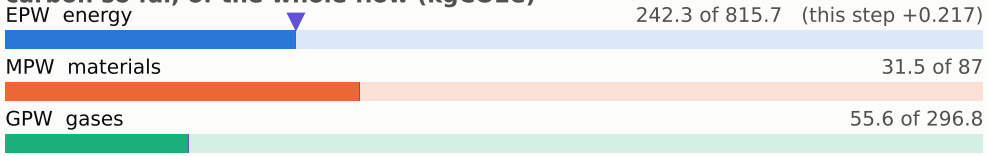

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

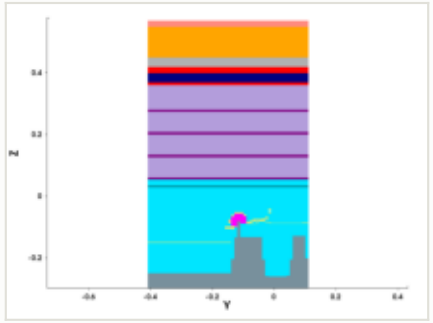

y cut at -0.150 µm

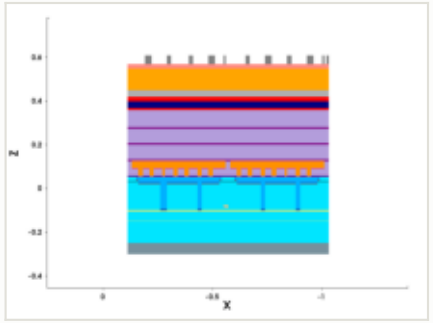

mask: layer 12401:0, positive (GDSII)

steps by process area

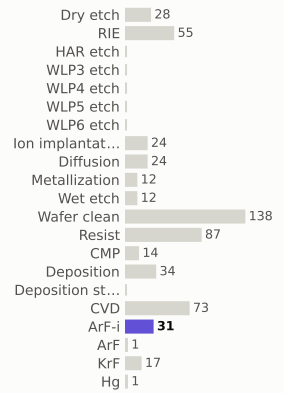

materials deposited (g)

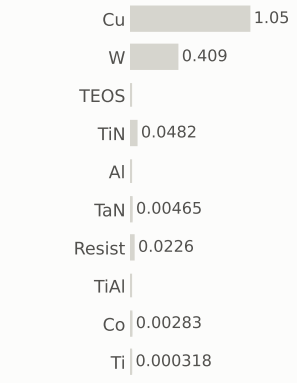

gases emitted (g)

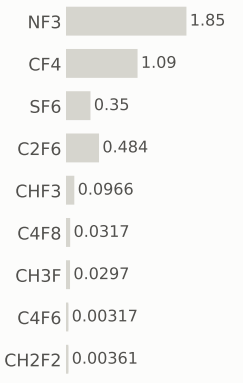

Step #7070: RIE

etch_anisotropic · RIE

1.04	330.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

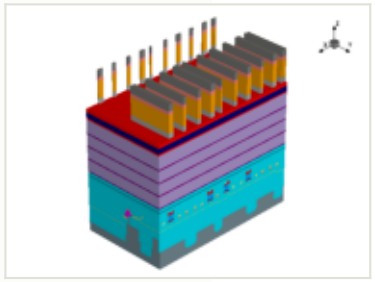

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

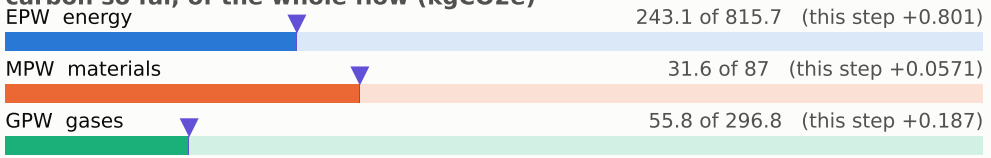

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

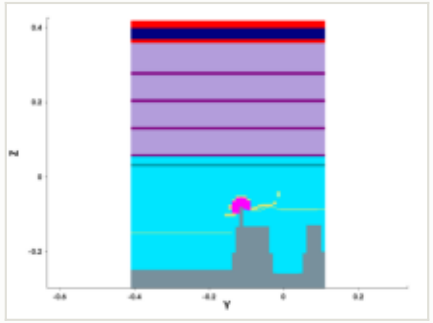

y cut at -0.150 µm

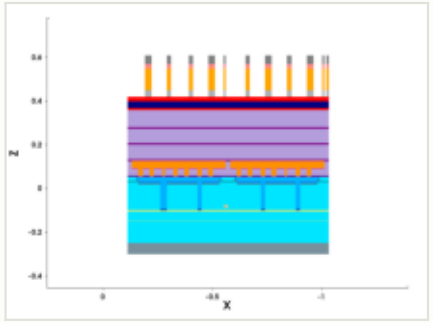

mask for this step

no mask for this step

steps by process area

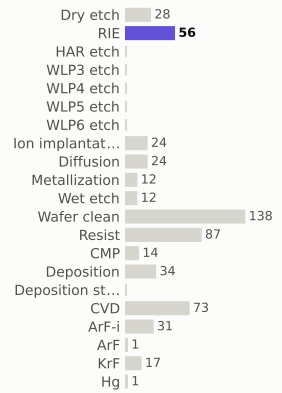

materials deposited (g)

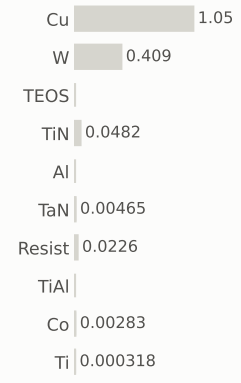

gases emitted (g)

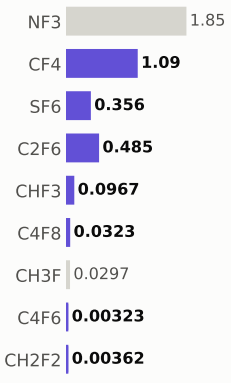

Step #7080: Spx_only

etch_strip · Spx_only

0	330.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

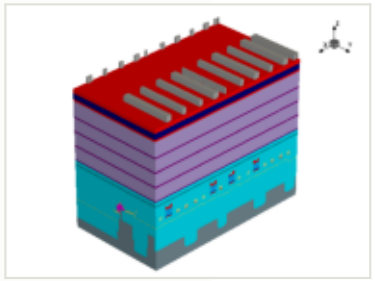

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

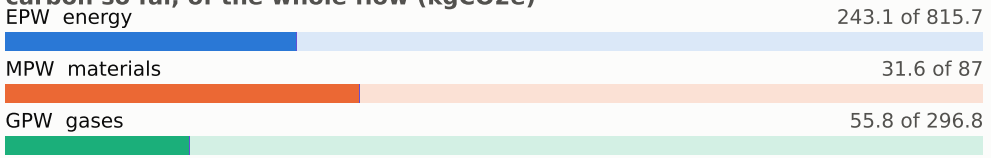

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

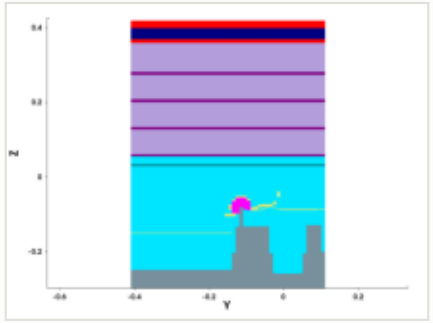

y cut at -0.150 µm

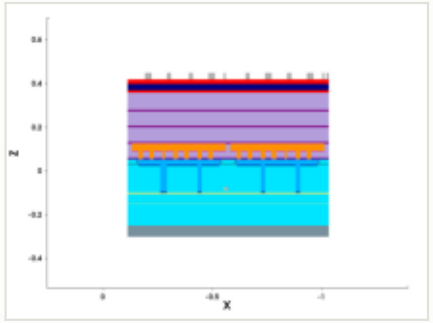

mask for this step

no mask for this step

steps by process area

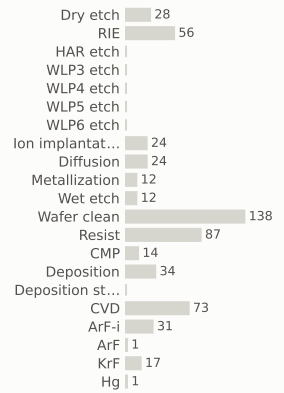

materials deposited (g)

gases emitted (g)

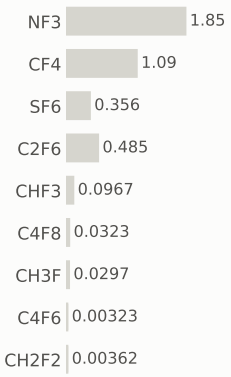

Step #7090: Spx_only

depo_isotropic · Spx_only

0	330.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

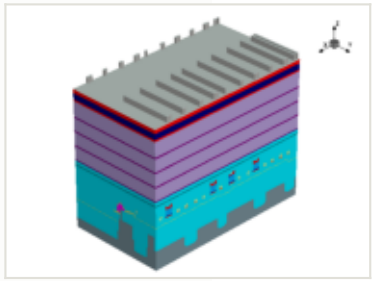

x cut at -0.570 µm

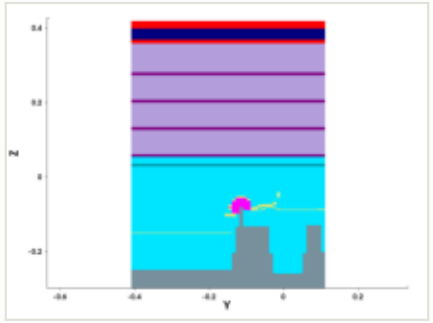

y cut at -0.150 µm

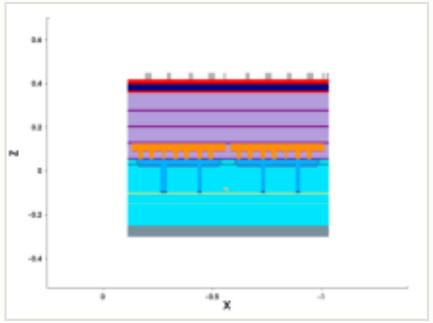

mask for this step

no mask for this step

this step

process area	Spx_only
material	—
thickness	0.001 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

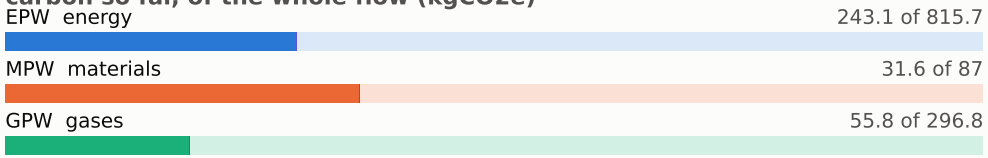

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

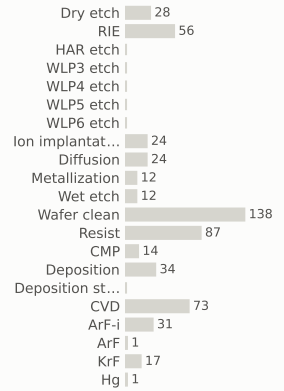

materials deposited (g)

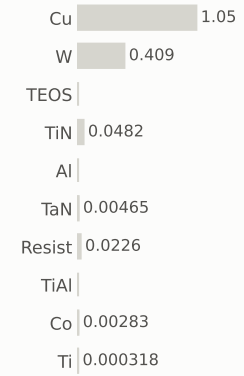

gases emitted (g)

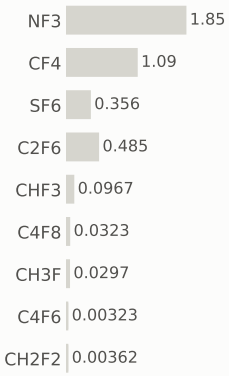

Step #7100: Spx_only

etch_anisotropic · Spx_only

0	330.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

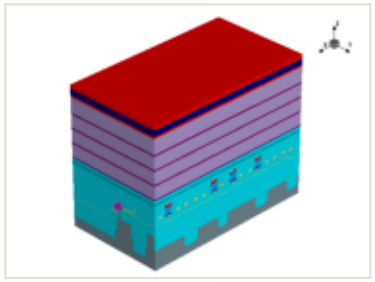

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 243.1 of 815.7

MPW materials 31.6 of 87

GPW gases 55.8 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

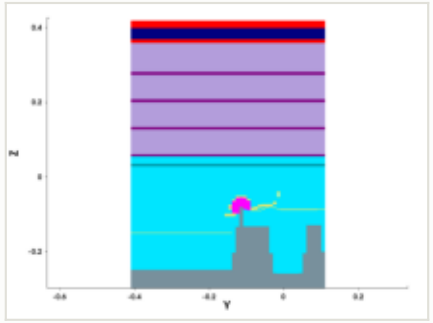

y cut at -0.150 µm

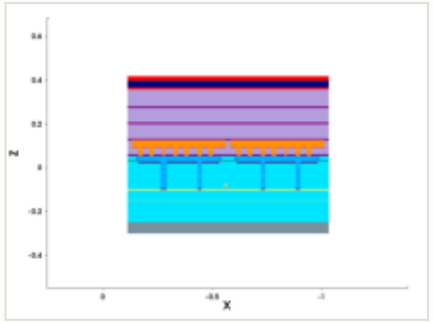

mask for this step

no mask for this step

steps by process area

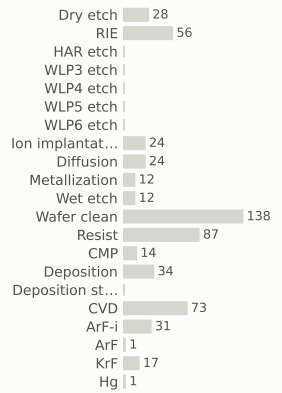

materials deposited (g)

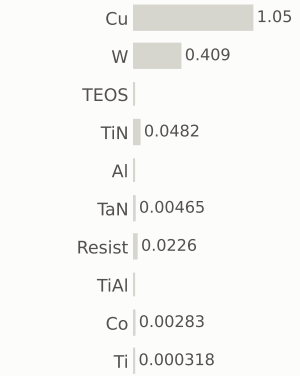

gases emitted (g)

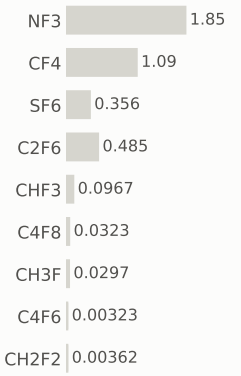

Step #7110: Spx_only

etch_strip · Spx_only

0	330.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

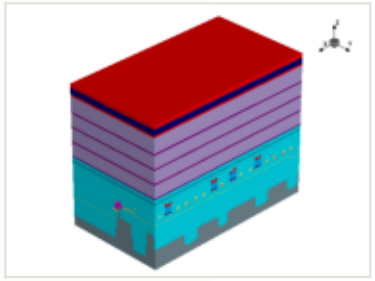

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

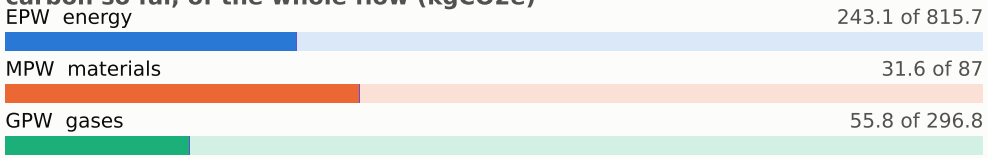

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

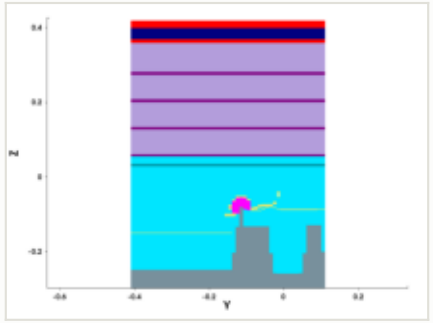

y cut at -0.150 µm

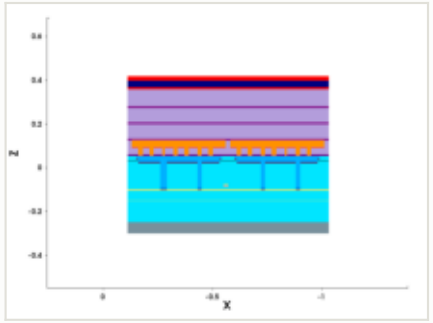

mask for this step

no mask for this step

steps by process area

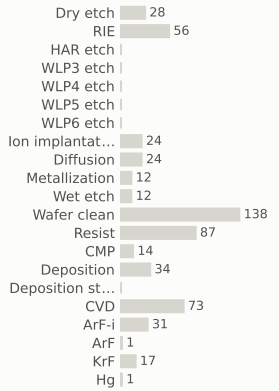

materials deposited (g)

gases emitted (g)

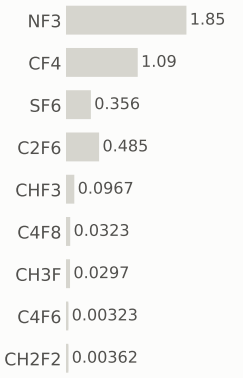

Step #7120: Spx_only

depo_fill · Spx_only

0	330.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

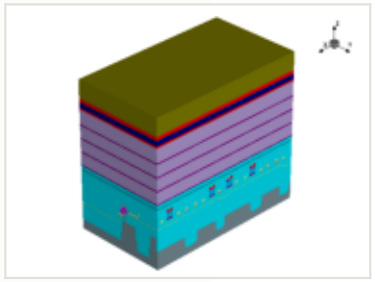

this step

process area	Spx_only
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

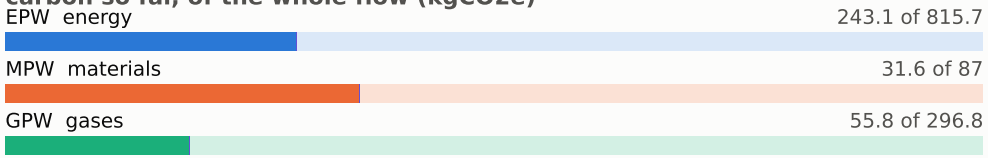

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

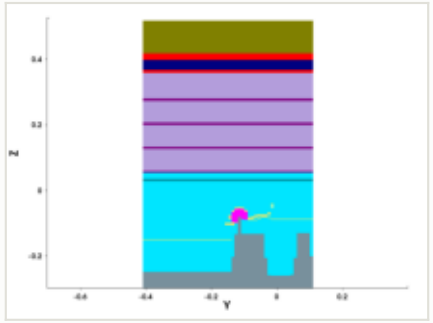

y cut at -0.150 µm

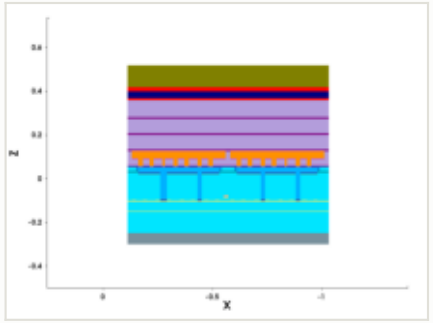

mask for this step

no mask for this step

steps by process area

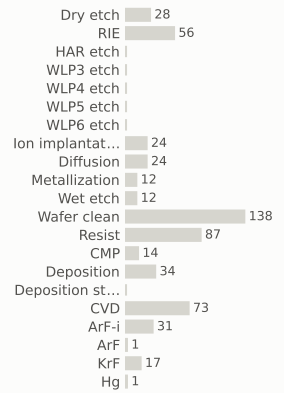

materials deposited (g)

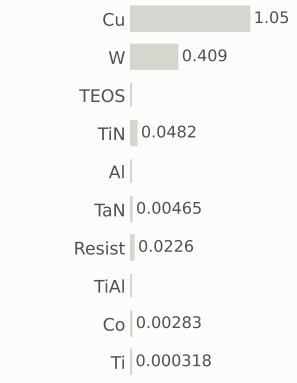

gases emitted (g)

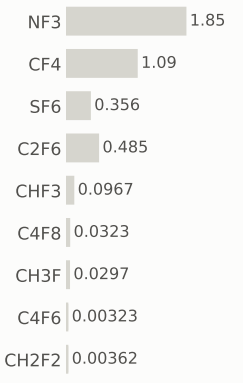

Step #7130: Spx_only

litho_patterning · Spx_only

0	330.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

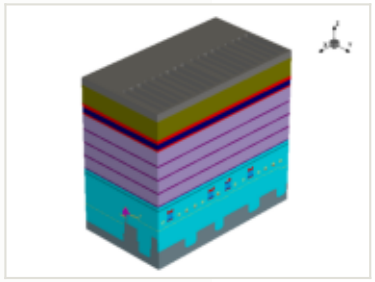

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

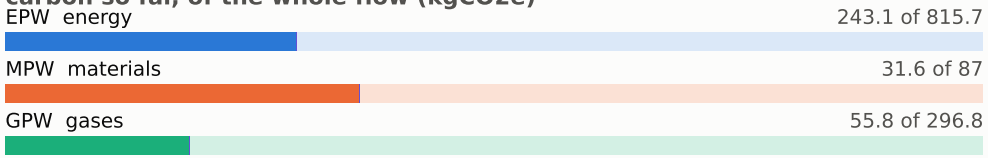

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

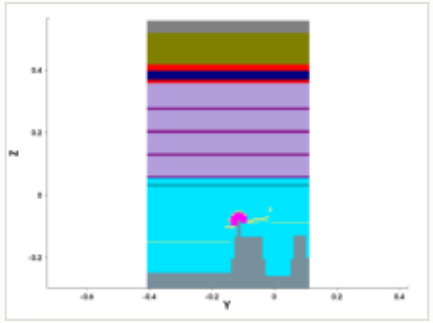

y cut at -0.150 µm

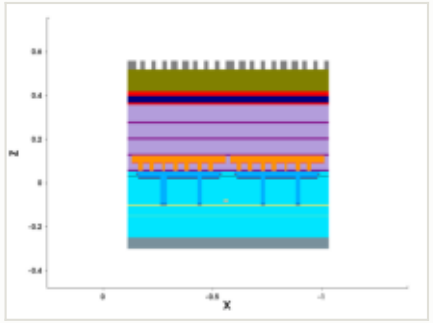

mask: layer 2040:0 (GDSII)

steps by process area

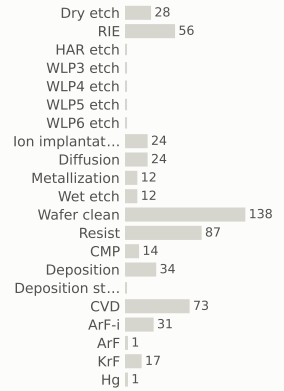

materials deposited (g)

gases emitted (g)

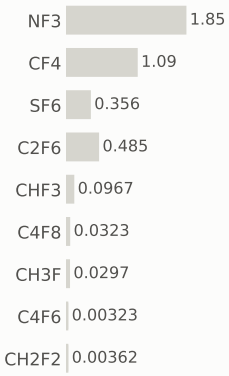

Step #7140: Spx_only

etch_anisotropic · Spx_only

0	330.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

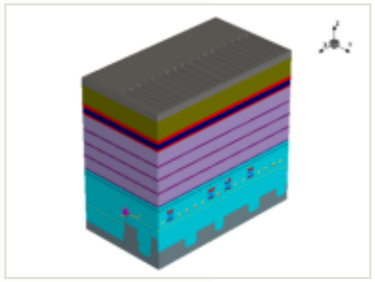

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

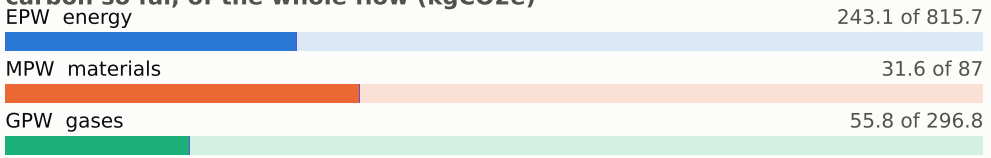

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

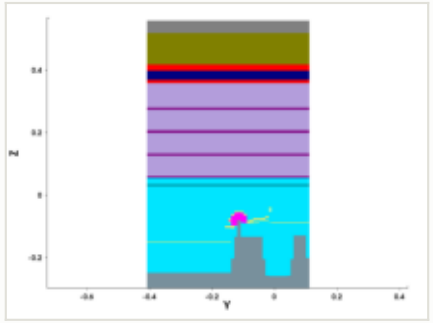

y cut at -0.150 µm

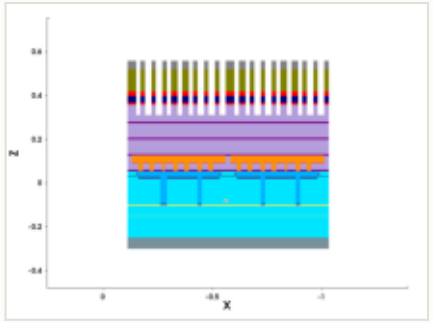

mask for this step

no mask for this step

steps by process area

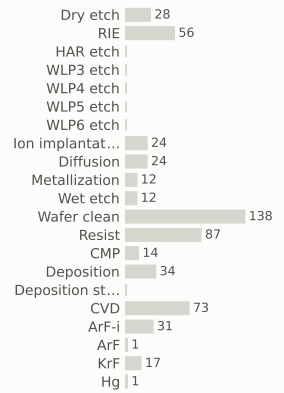

materials deposited (g)

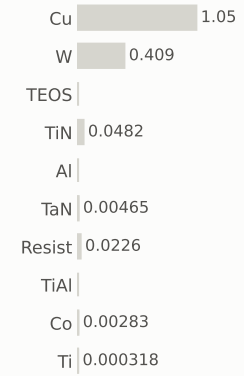

gases emitted (g)

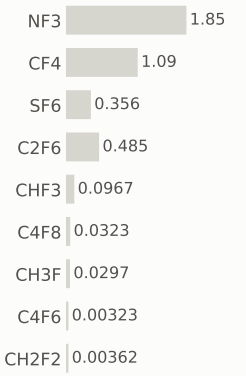

Step #7150: Spx_only

etch_strip · Spx_only

0	330.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

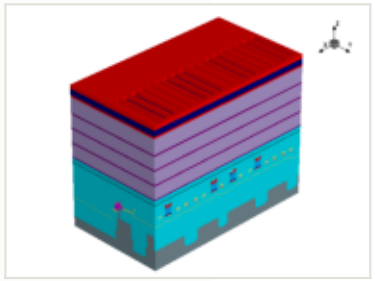

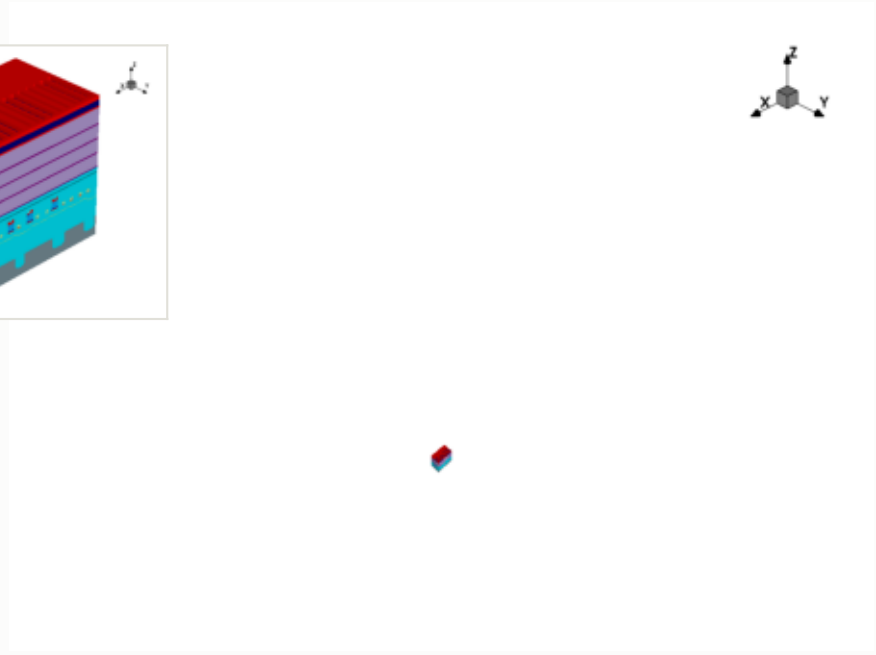

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

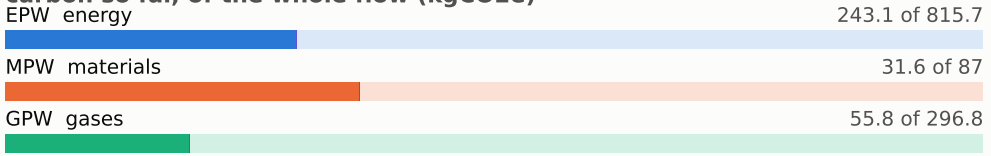

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

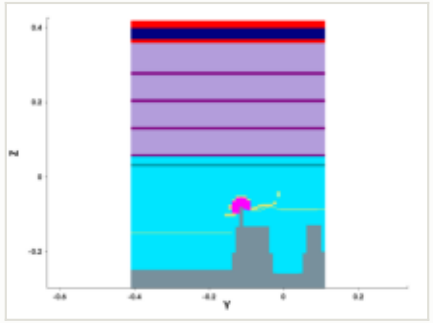

y cut at -0.150 µm

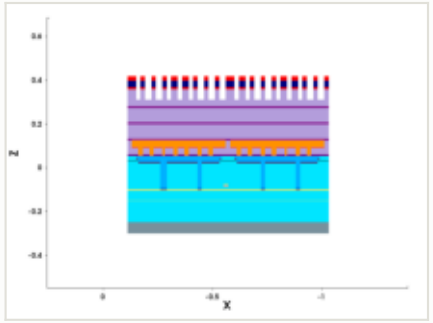

mask for this step

no mask for this step

steps by process area

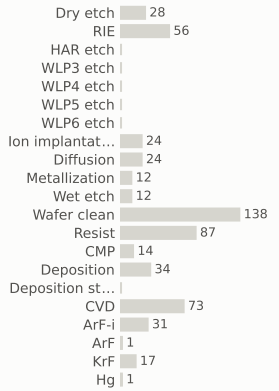

materials deposited (g)

gases emitted (g)

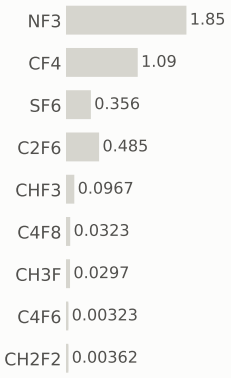

Step #7160: Wafer_clean

clean · Wafer_clean

0.169	330.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

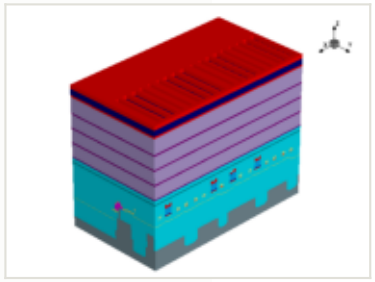

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

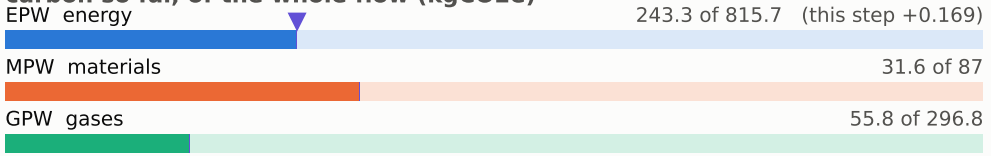

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

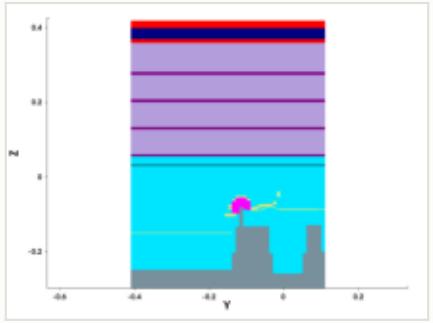

y cut at -0.150 µm

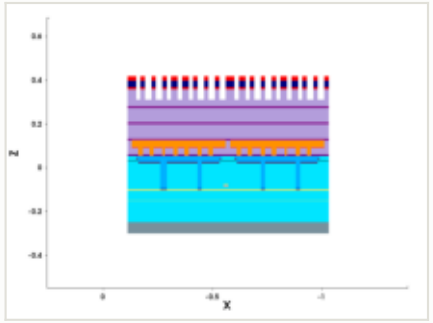

mask for this step

no mask for this step

steps by process area

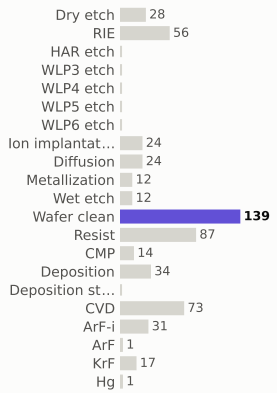

materials deposited (g)

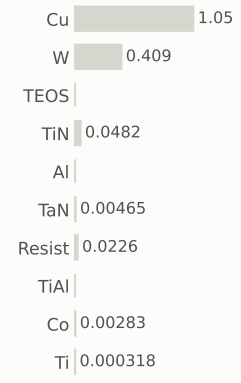

gases emitted (g)

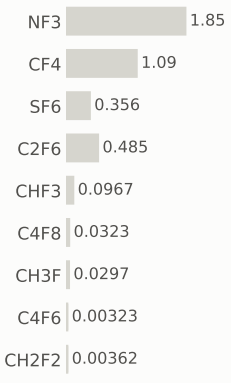

Step #7170: Resist

depo_fill · Resist

0.169	330.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

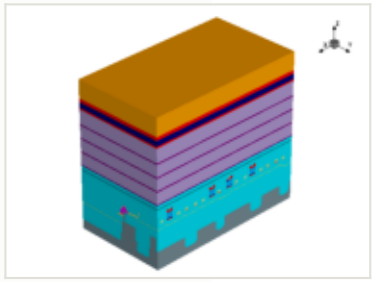

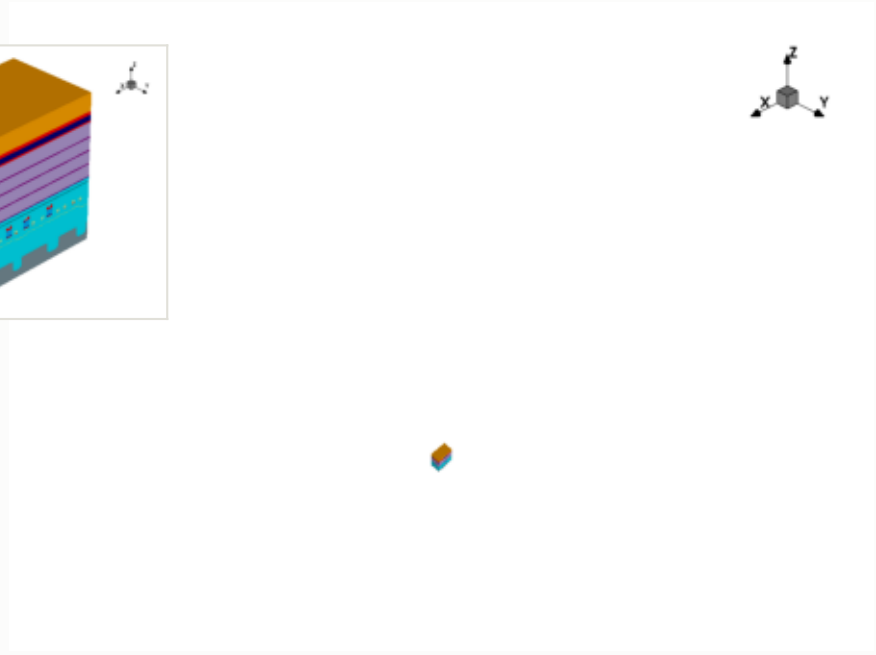

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

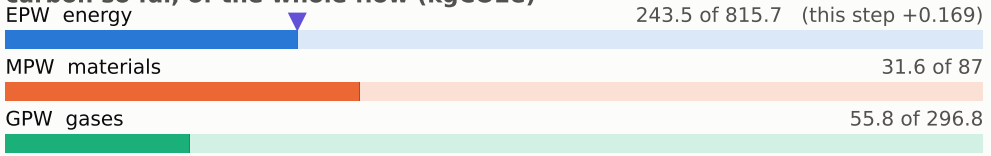

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

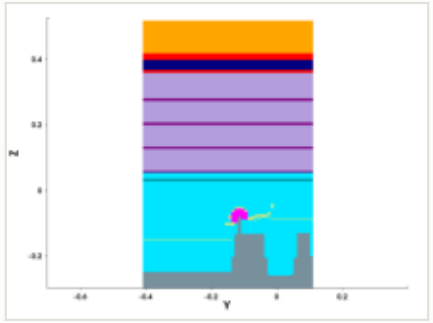

y cut at -0.150 µm

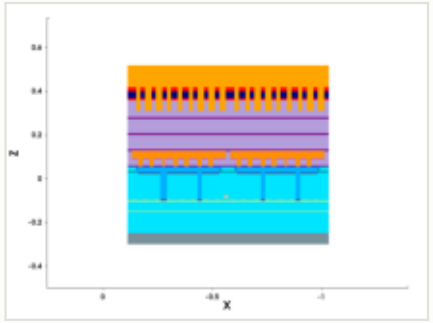

mask for this step

no mask for this step

steps by process area

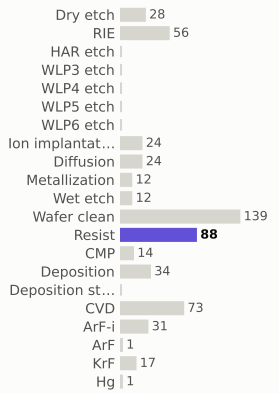

materials deposited (g)



gases emitted (g)

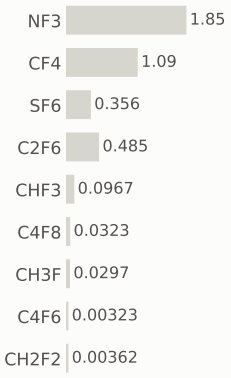

Step #7180: CVD

depo_fill · CVD

1.31	332.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

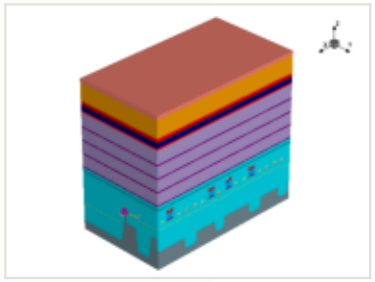

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

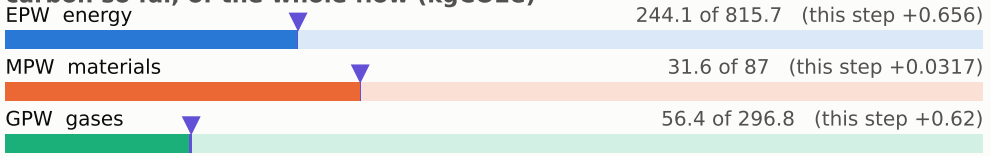

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

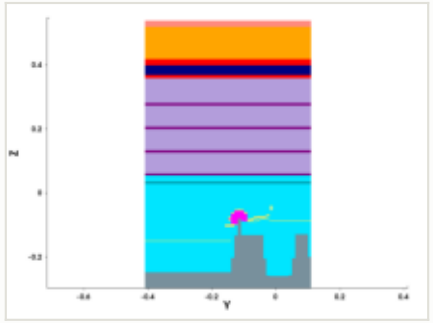

y cut at -0.150 µm

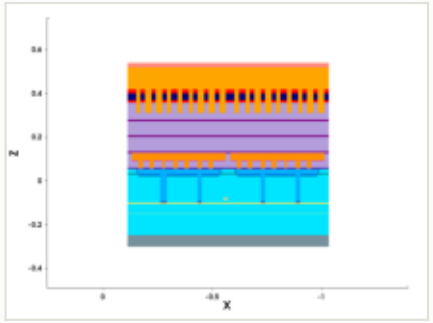

mask for this step

no mask for this step

steps by process area

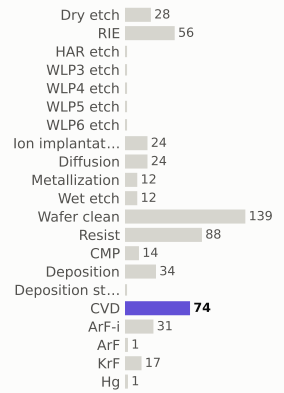

materials deposited (g)

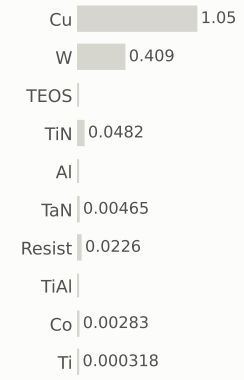

gases emitted (g)

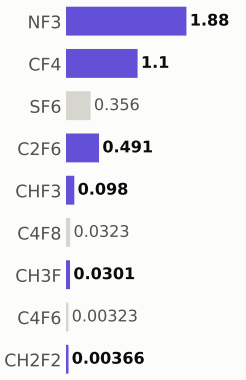

Step #7190: Wafer_clean

clean · Wafer_clean

0.169	332.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

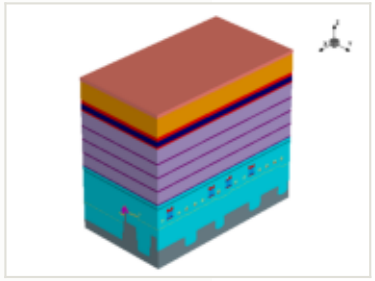

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

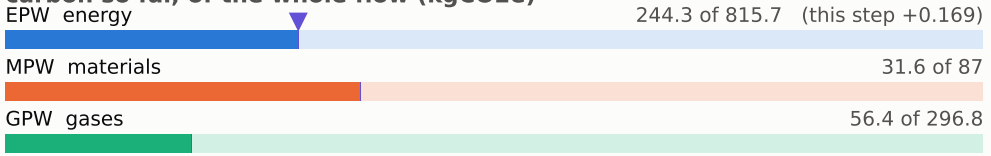

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

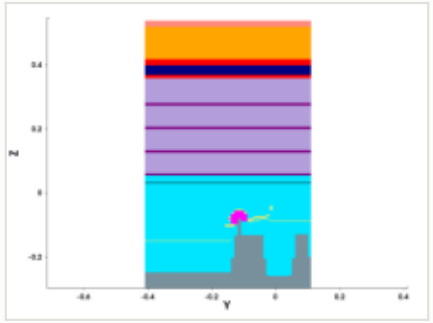

y cut at -0.150 µm

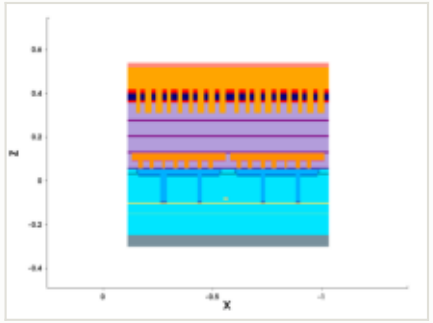

mask for this step

no mask for this step

steps by process area

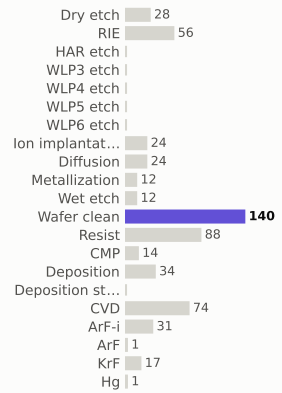

materials deposited (g)

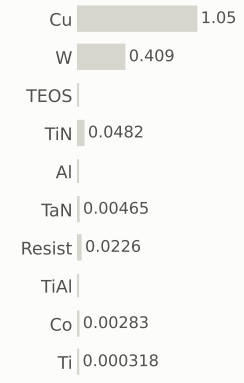

gases emitted (g)

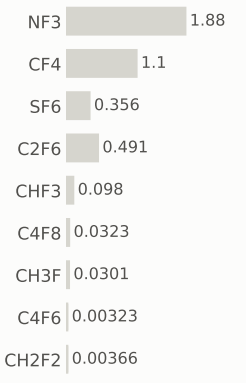

Step #7200: Resist

resist · Resist

0.169	332.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

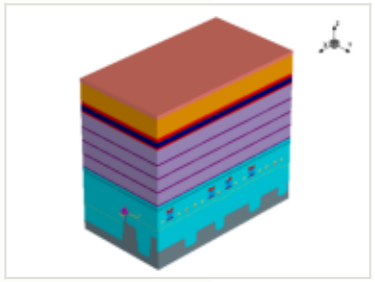

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

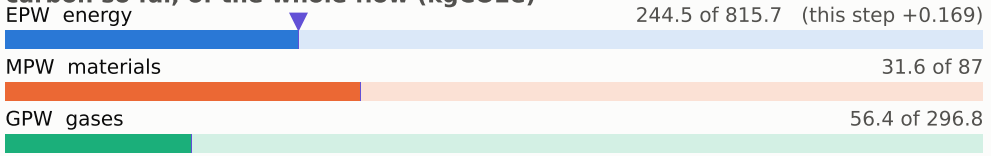

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

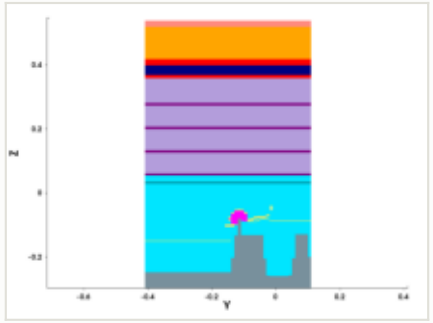

y cut at -0.150 µm

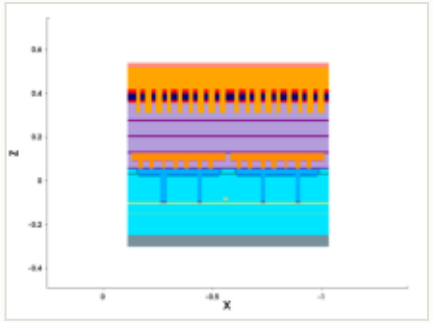

mask for this step

no mask for this step

steps by process area

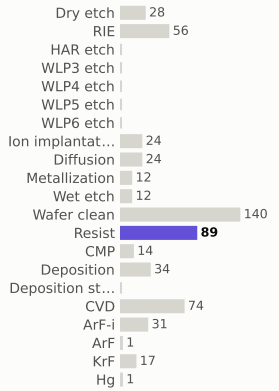

materials deposited (g)



gases emitted (g)

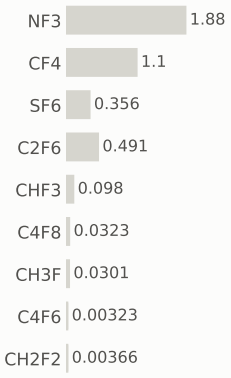

Step #7210: ArF-i

litho_patterning · ArF-i

0.217	332.7	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

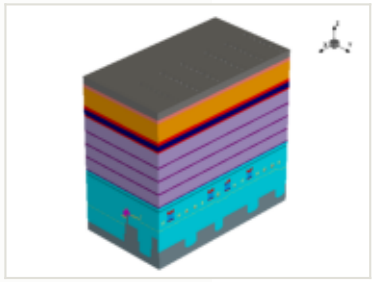

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

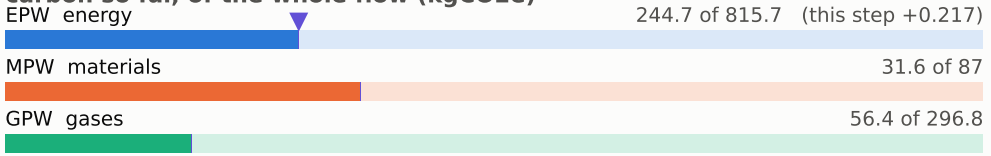

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

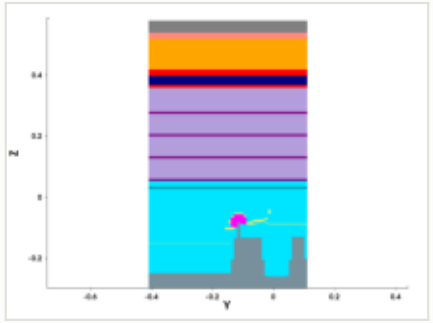

y cut at -0.150 µm

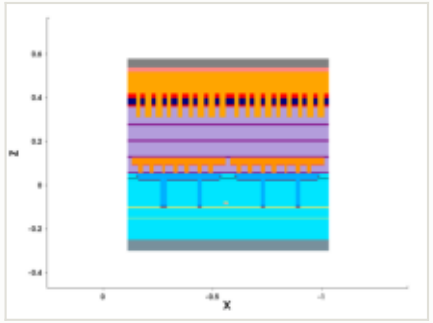

mask: layer 2035:0 (GDSII)

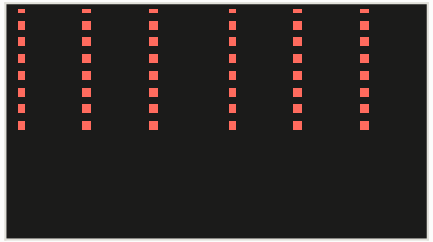

steps by process area

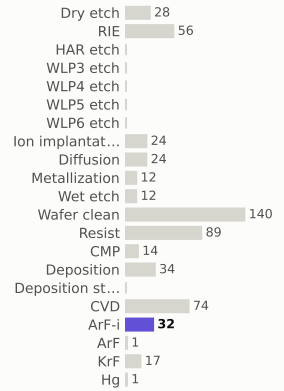

materials deposited (g)

gases emitted (g)

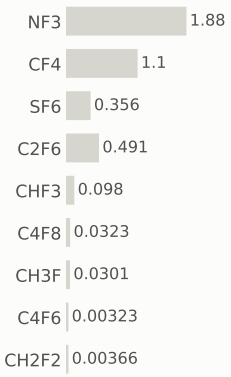

Step #7220: RIE

etch_anisotropic · RIE

1.04	333.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

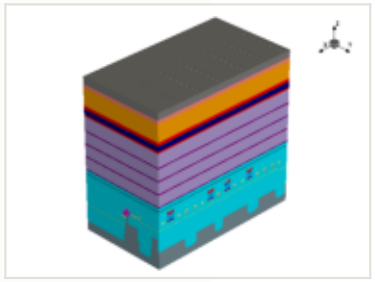

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

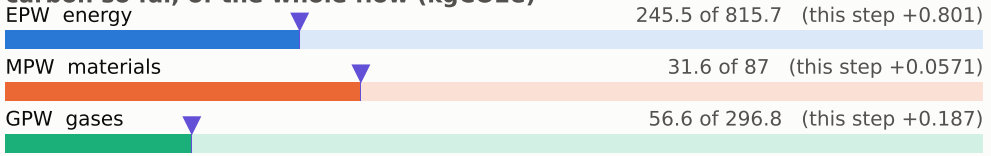

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

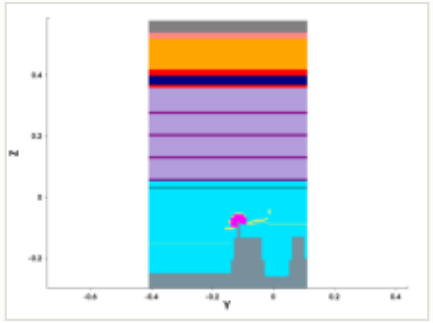

y cut at -0.150 µm

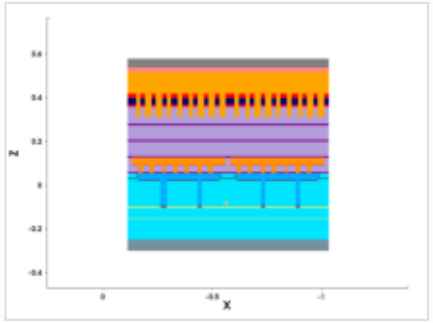

mask for this step

no mask for this step

steps by process area

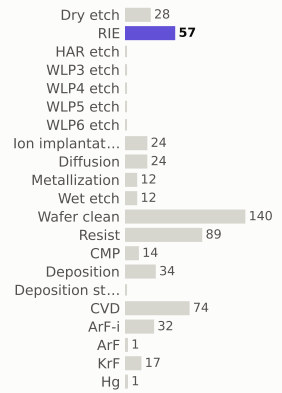

materials deposited (g)

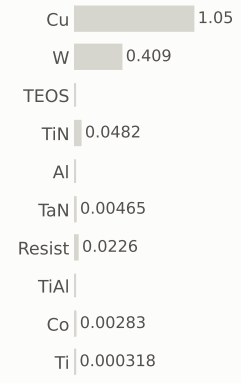

gases emitted (g)

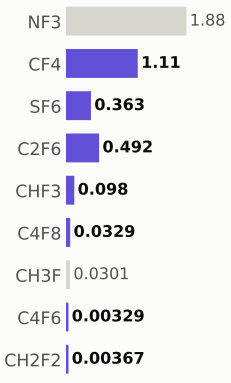

Step #7230: Spx_only

etch_strip · Spx_only

0	333.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

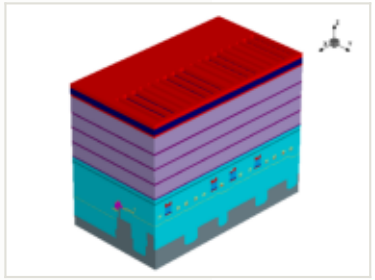

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

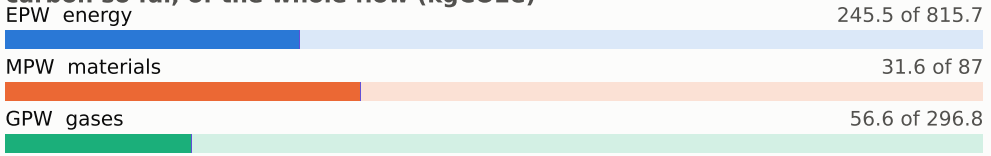

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

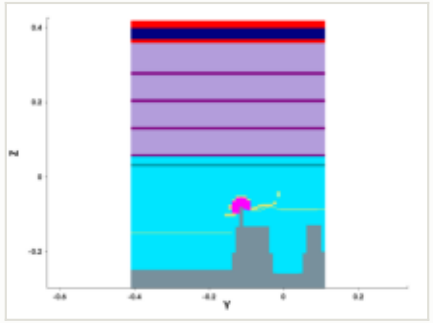

y cut at -0.150 µm

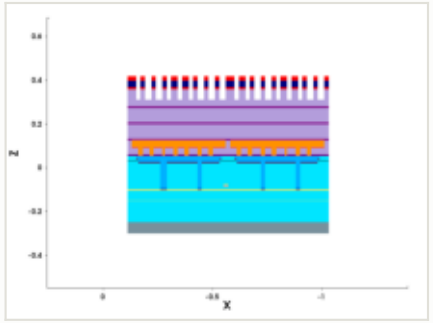

mask for this step

no mask for this step

steps by process area

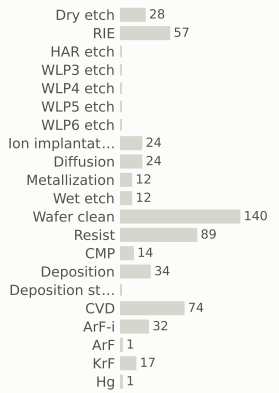

materials deposited (g)

gases emitted (g)

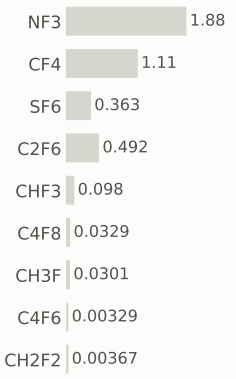

Step #7240: Wafer_clean

clean · Wafer_clean

0.169	333.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

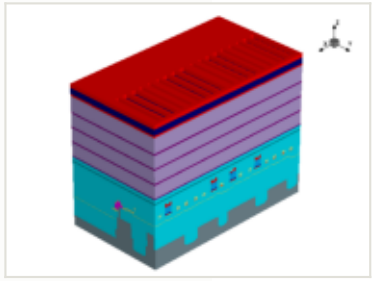

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

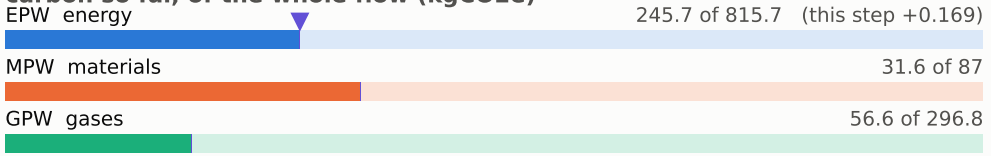

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

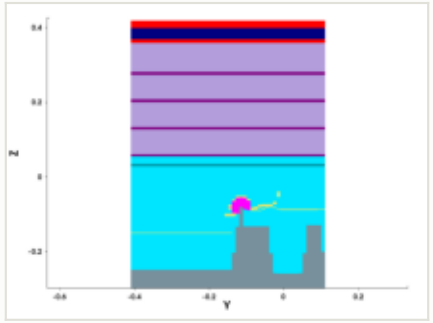

y cut at -0.150 µm

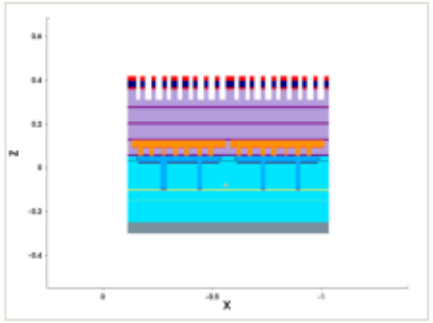

mask for this step

no mask for this step

steps by process area

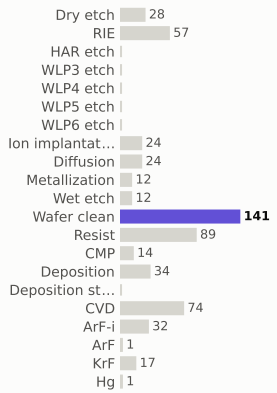

materials deposited (g)

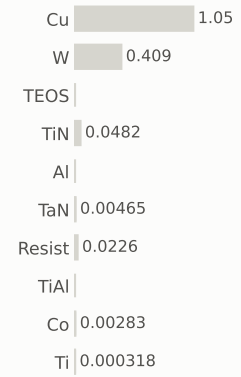

gases emitted (g)

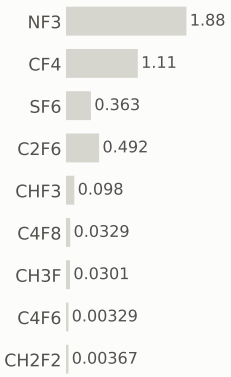

Step #7250: Metallization

depo_ellipsoidal · Metallization

1.2	335.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

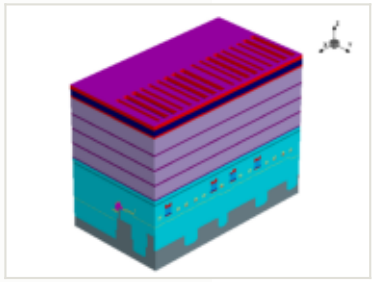

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

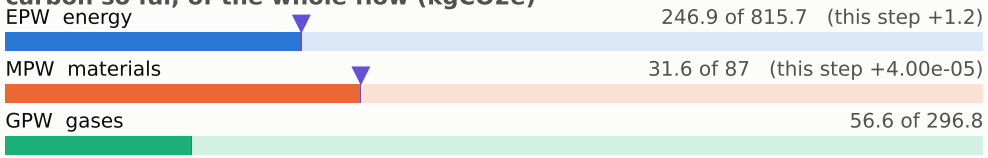

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

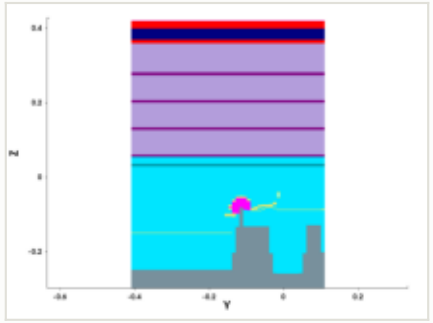

y cut at -0.150 µm

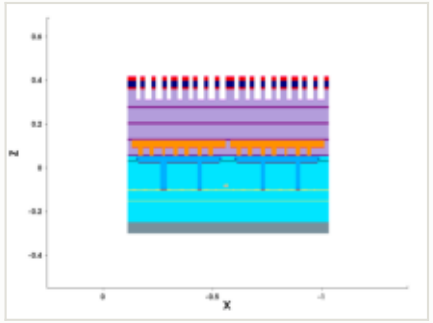

mask for this step

no mask for this step

steps by process area

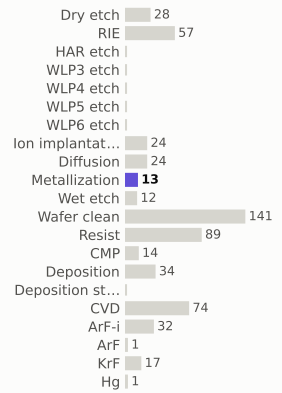

materials deposited (g)

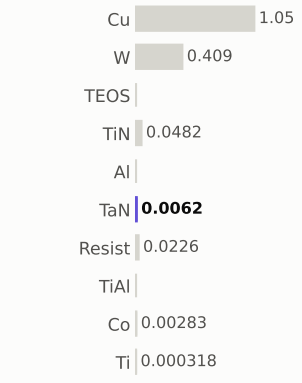

gases emitted (g)

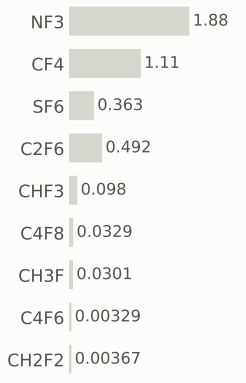

Step #7260: Metallization

depo_fill · Metallization

1.21	336.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

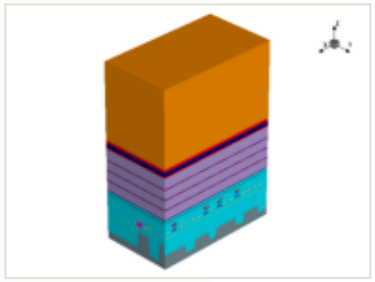

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

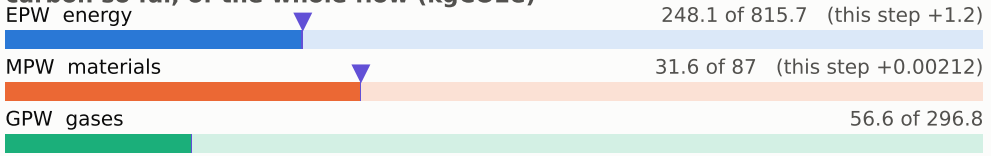

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

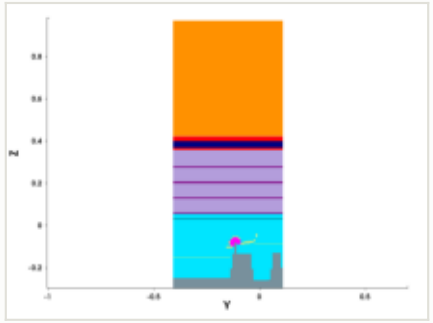

y cut at -0.150 µm

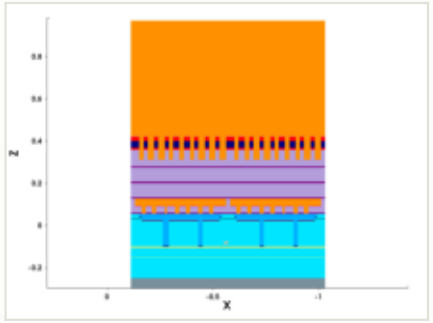

mask for this step

no mask for this step

steps by process area

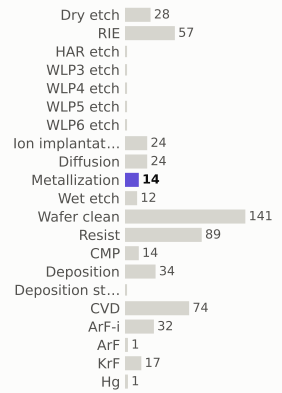

materials deposited (g)

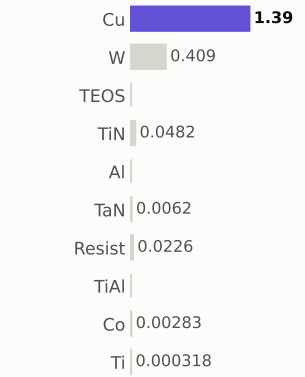

gases emitted (g)

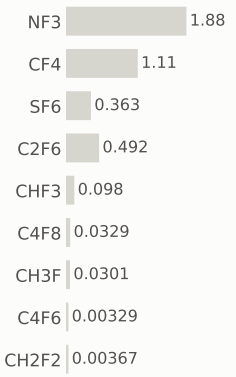

Step #7270: Diffusion

anneal · Diffusion

0.801	337.1	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

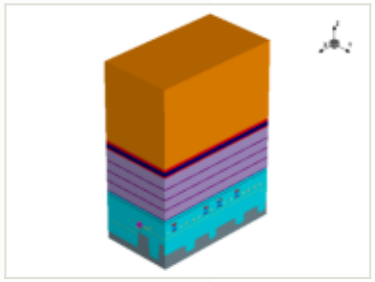

x cut at -0.570 µm

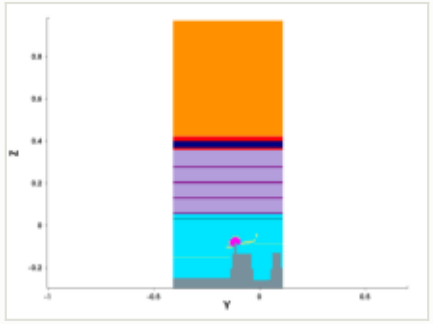

y cut at -0.150 µm

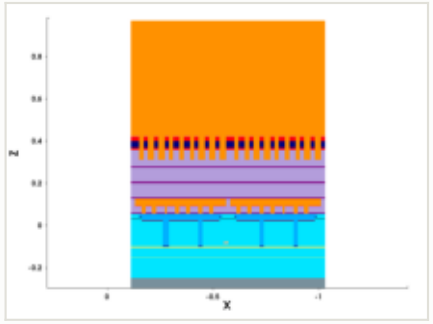

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

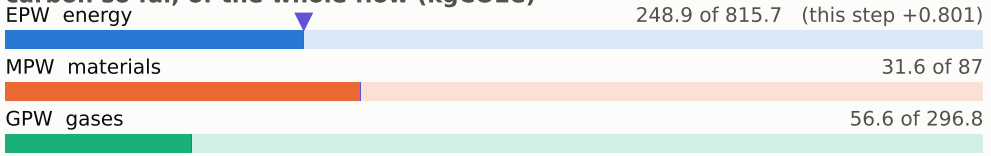

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

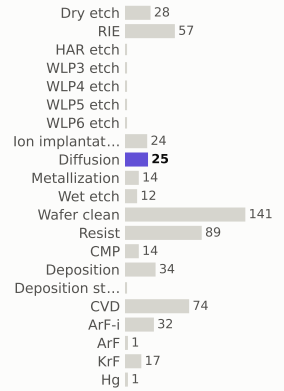

materials deposited (g)

gases emitted (g)

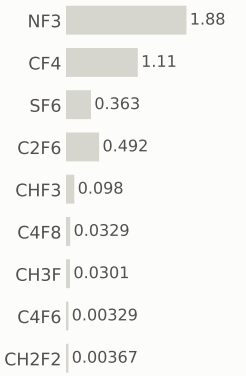

Step #7280: CMP

etch_cmp · CMP

0.169	337.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

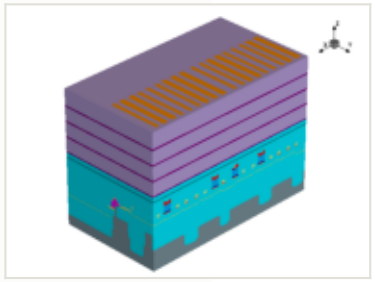

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

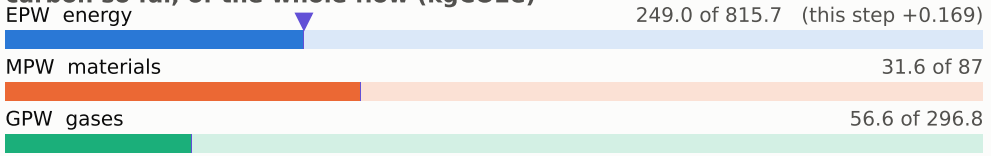

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

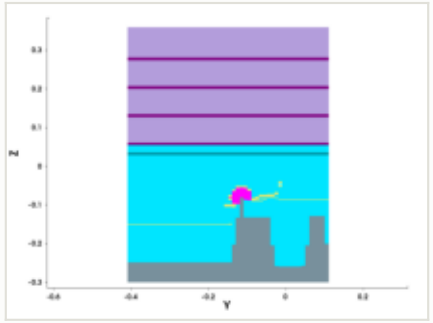

y cut at -0.150 µm

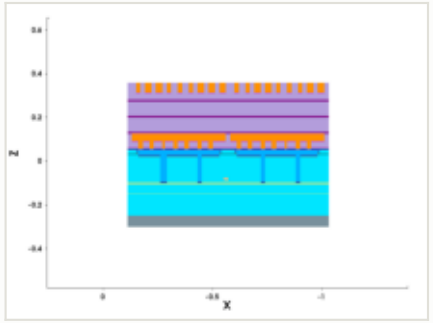

mask for this step

no mask for this step

steps by process area

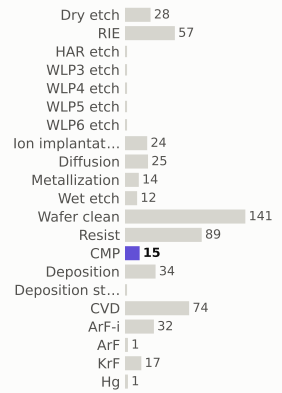

materials deposited (g)

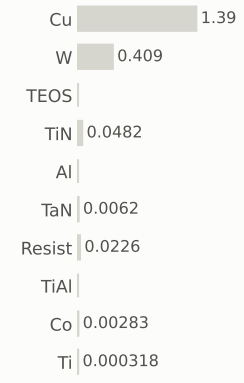

gases emitted (g)

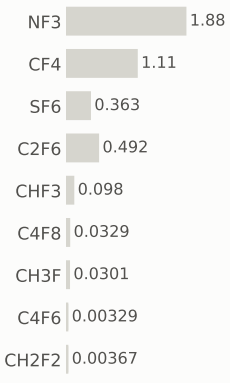

Step #7290: Spx_only

depo_isotropic · Spx_only

4.20e-05	337.3	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

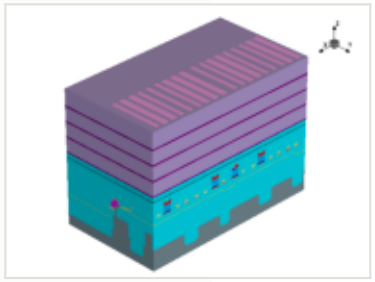

this step

process area	Spx_only
material	Co
thickness	0.0015 µm
material GWP	44.5 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	4.20e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**4.20e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

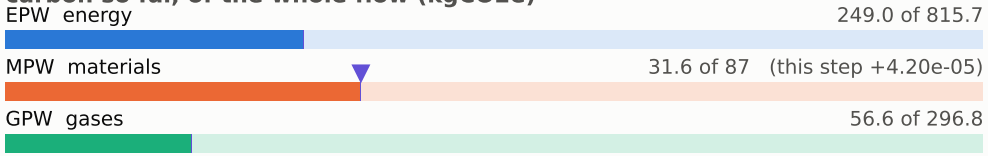

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

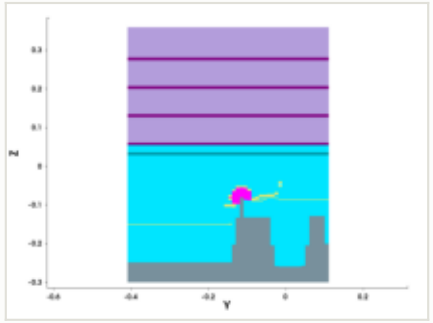

y cut at -0.150 µm

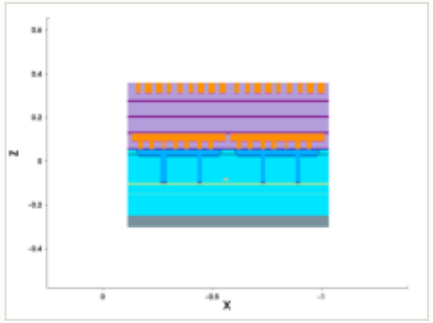

mask for this step

no mask for this step

steps by process area

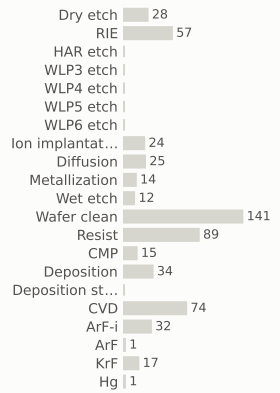

materials deposited (g)

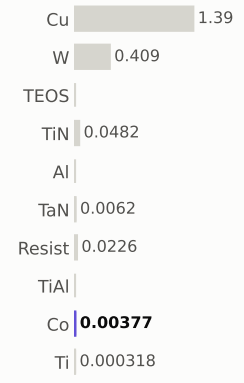

gases emitted (g)

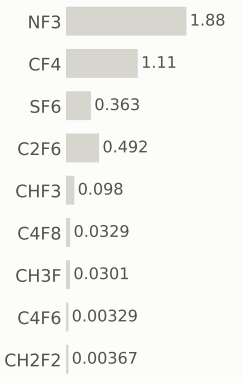

Step #7310: CVD

depo_isotropic · CVD

1.31	338.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

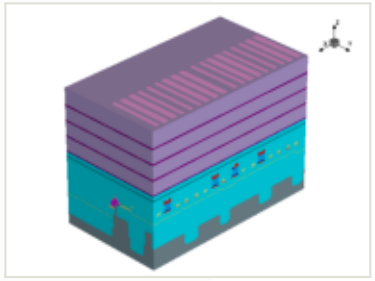

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

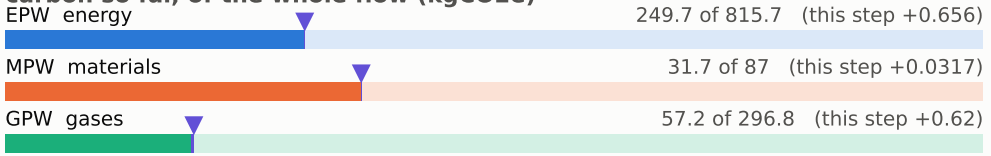

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

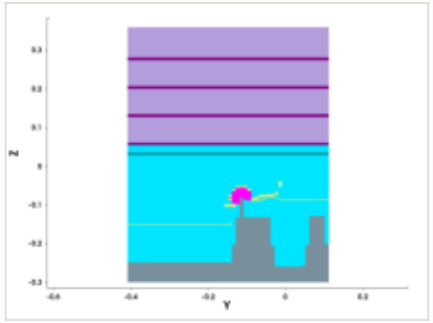

y cut at -0.150 µm

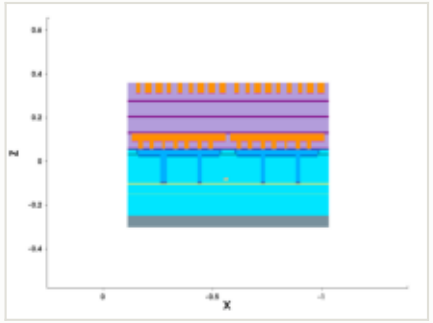

mask for this step

no mask for this step

steps by process area

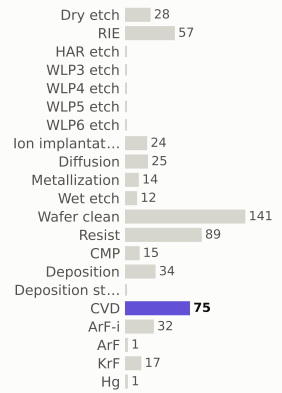

materials deposited (g)

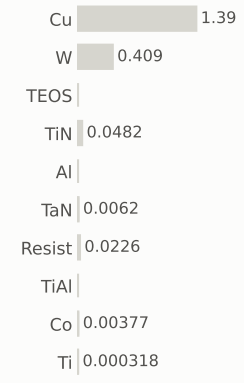

gases emitted (g)

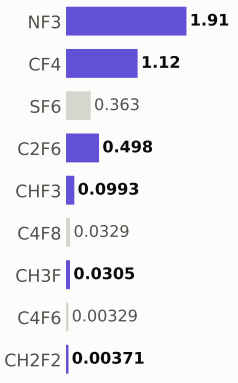

Step #7320: Spx_only

depo_fill · Spx_only

0	338.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

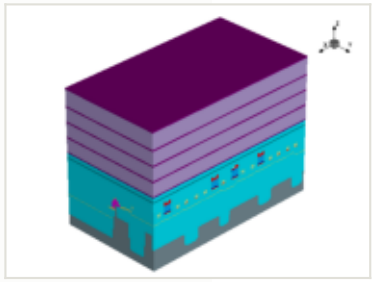

this step

process area	Spx_only
material	—
thickness	0.006 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

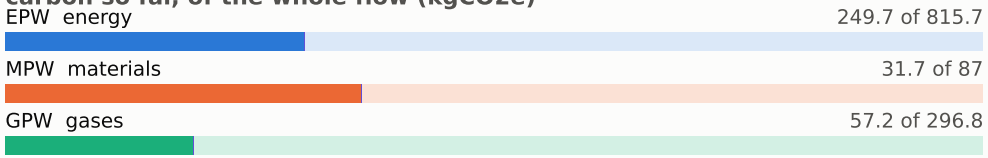

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

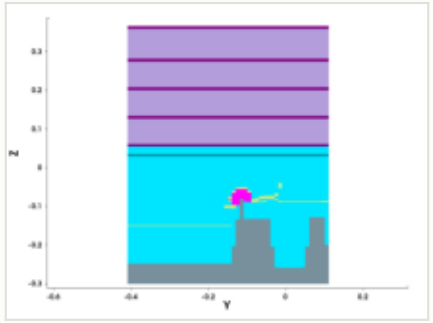

y cut at -0.150 µm

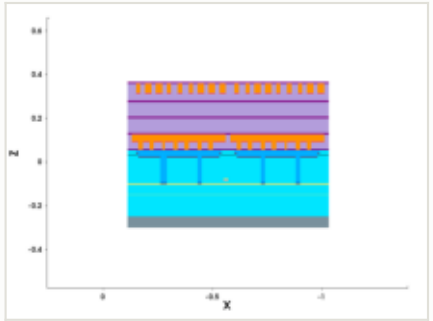

mask for this step

no mask for this step

steps by process area

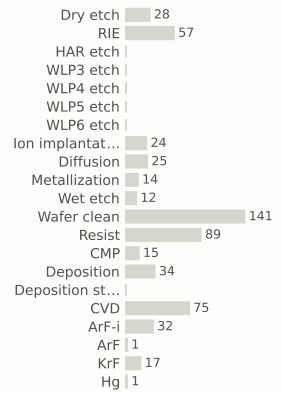

materials deposited (g)

gases emitted (g)

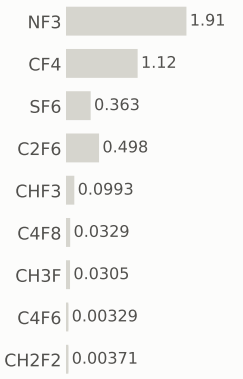

Step #7330: CVD

depo_fill · CVD

1.31	339.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

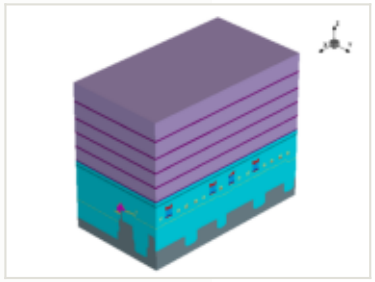

this step

process area	CVD
material	—
thickness	0.09 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

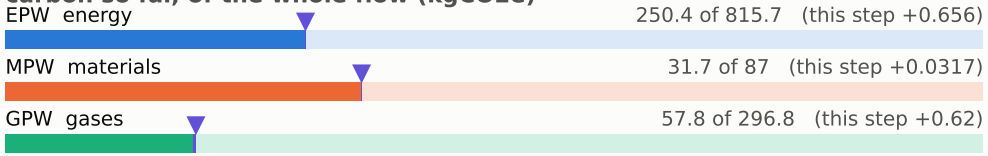

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

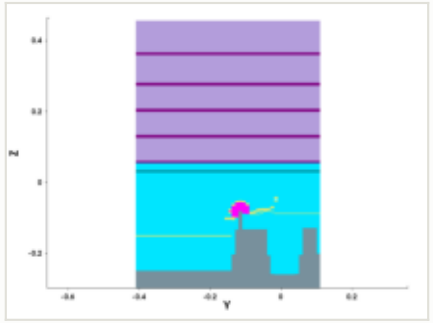

y cut at -0.150 µm

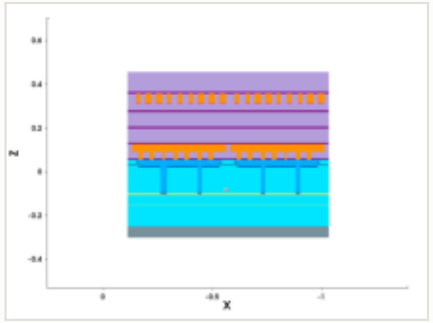

mask for this step

no mask for this step

steps by process area

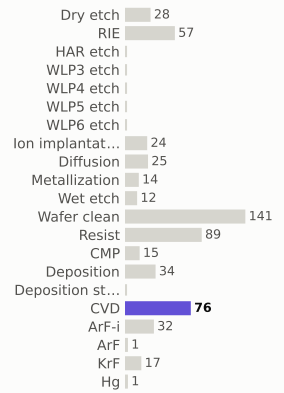

materials deposited (g)

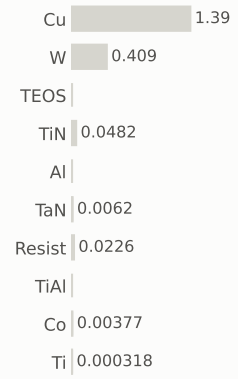

gases emitted (g)

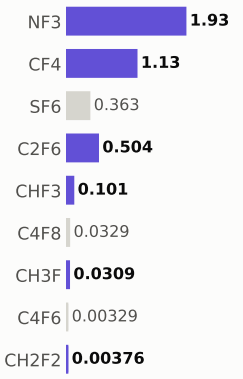

Step #7340: Diffusion

anneal · Diffusion

0.801	340.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

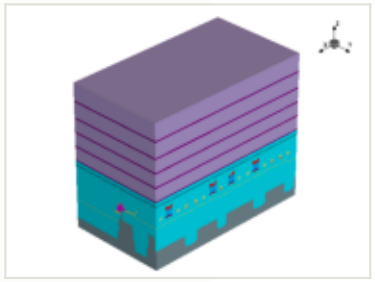

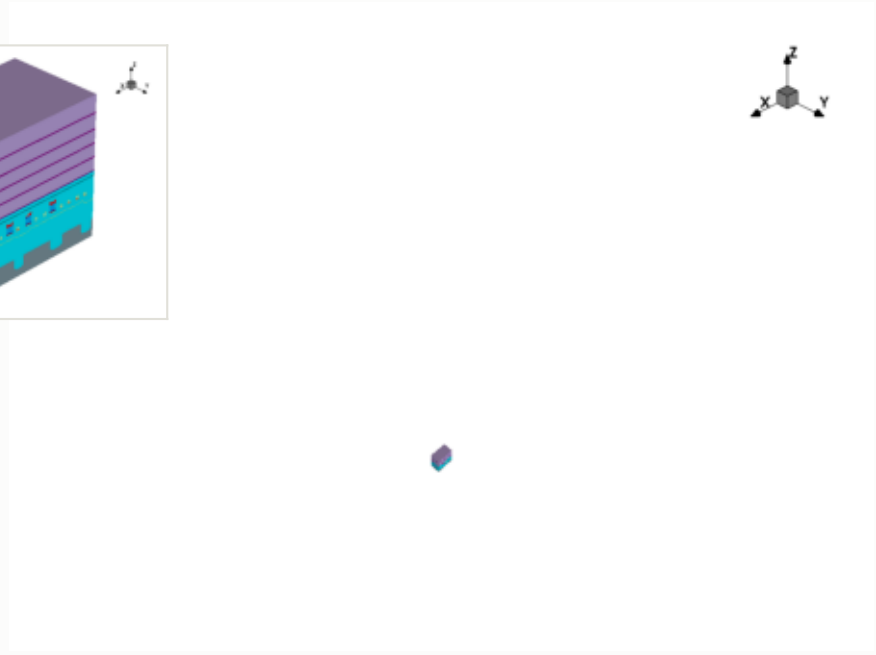

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

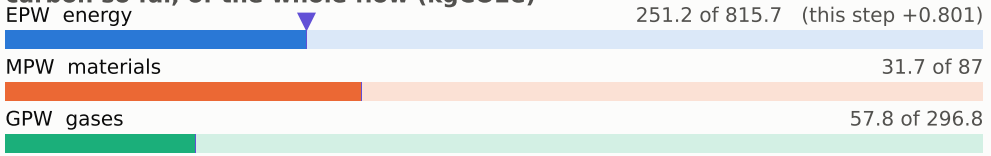

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

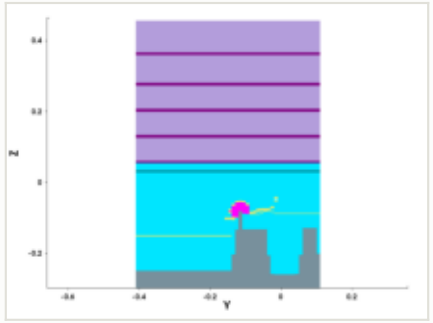

y cut at -0.150 µm

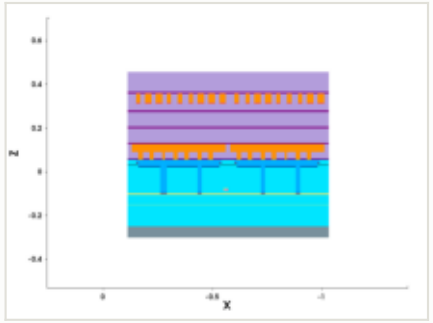

mask for this step

no mask for this step

steps by process area

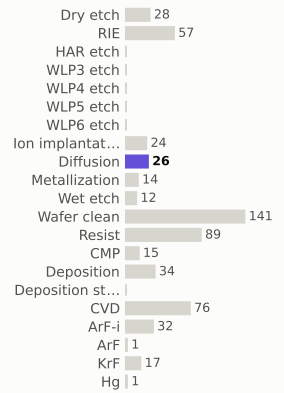

materials deposited (g)

gases emitted (g)

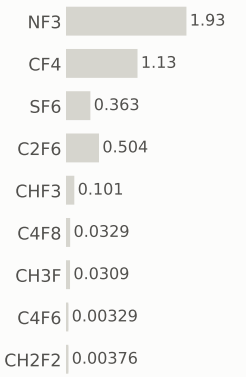

Step #7350: Wafer_clean

clean · Wafer_clean

0.169	340.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

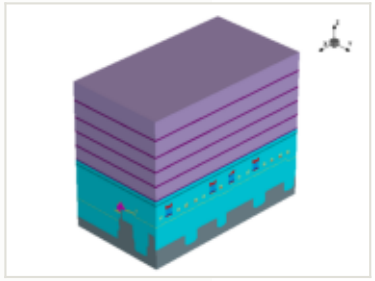

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

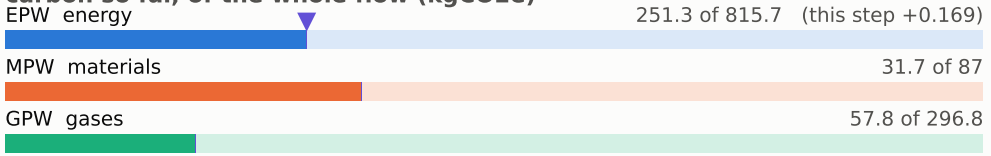

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

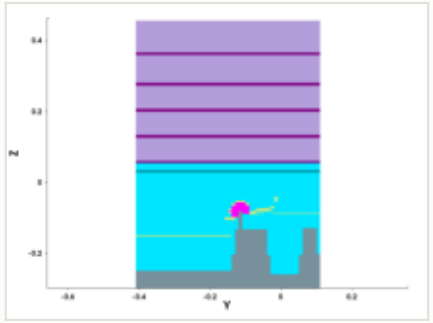

y cut at -0.150 µm

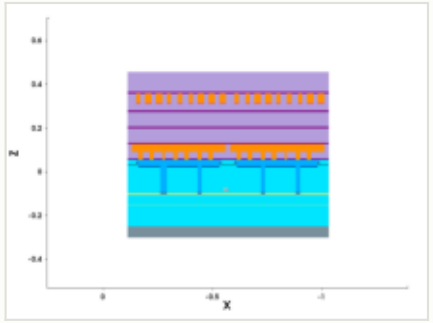

mask for this step

no mask for this step

steps by process area

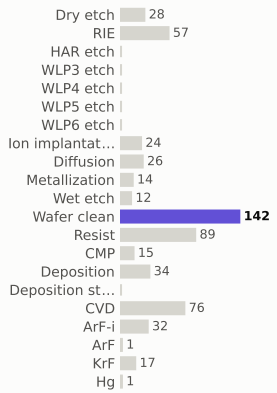

materials deposited (g)

gases emitted (g)

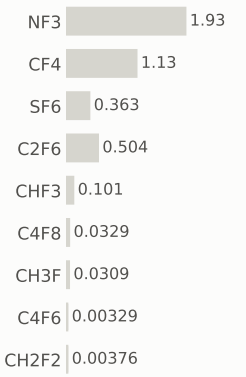

Step #7360: CVD

depo_fill · CVD

1.31	342.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

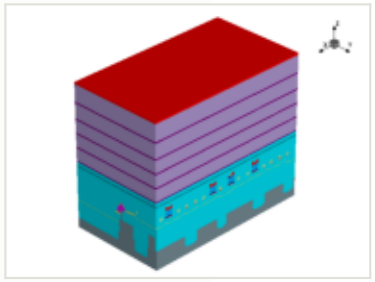

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

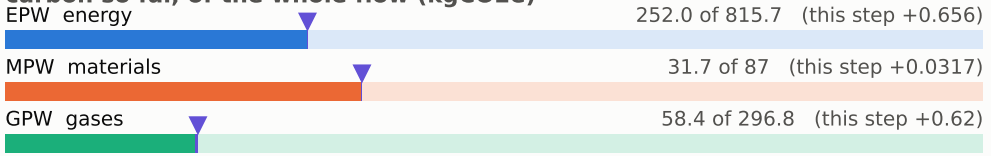

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

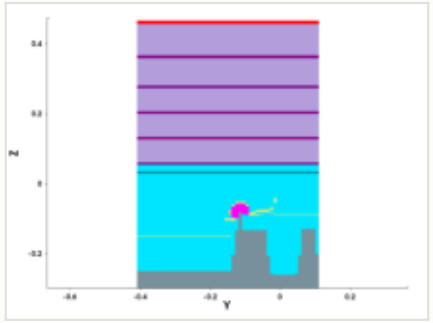

y cut at -0.150 µm

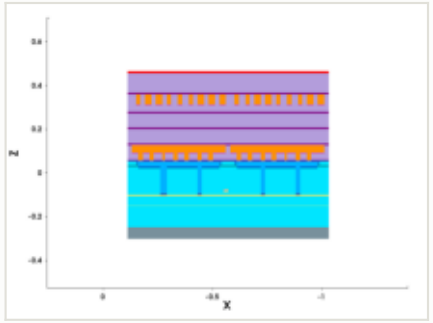

mask for this step

no mask for this step

steps by process area

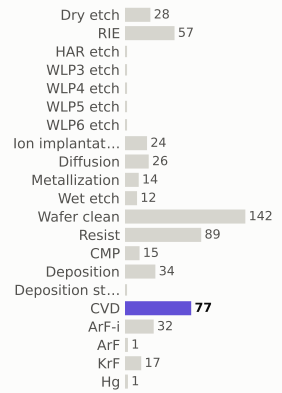

materials deposited (g)

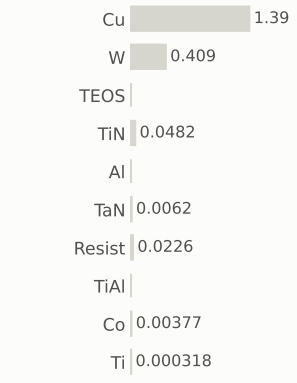

gases emitted (g)

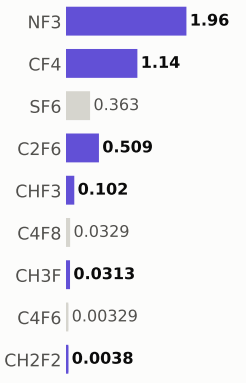

Step #7370: Spx_only

depo_fill · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

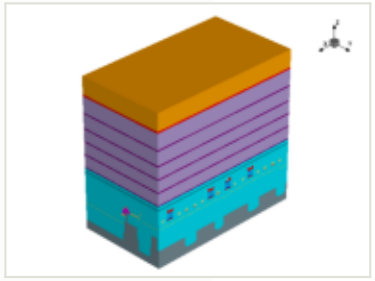

this step

process area	Spx_only
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

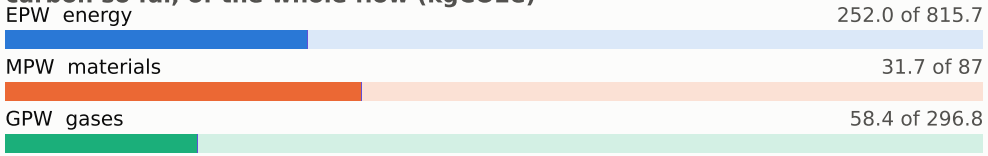

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

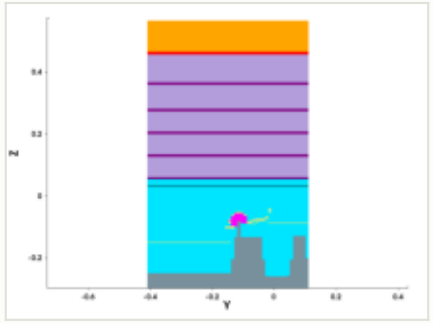

y cut at -0.150 µm

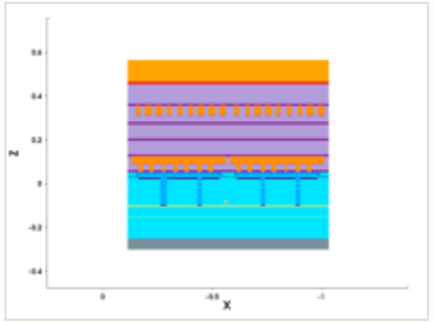

mask for this step

no mask for this step

steps by process area

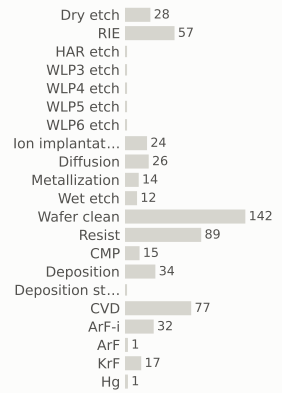

materials deposited (g)

gases emitted (g)

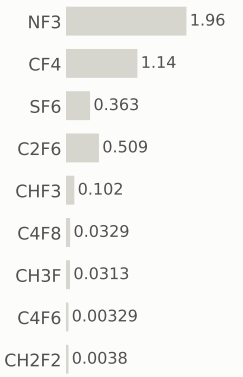

Step #7380: Spx_only

depo_fill · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

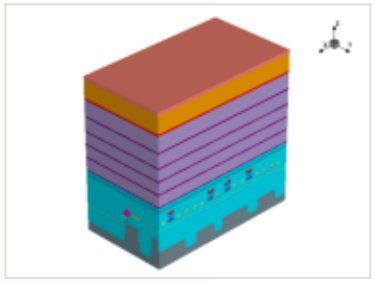

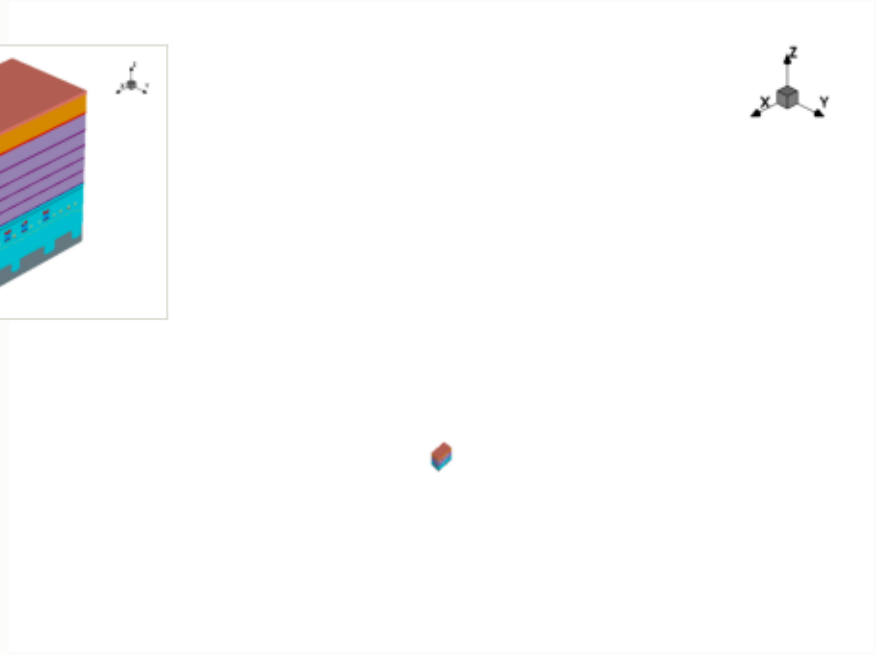

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.02 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

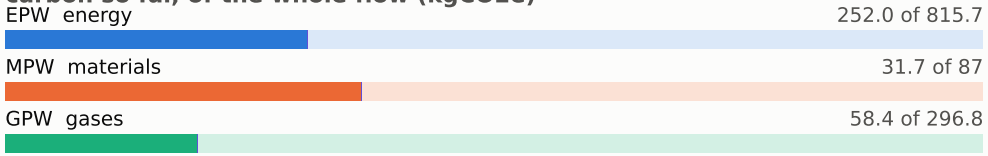

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

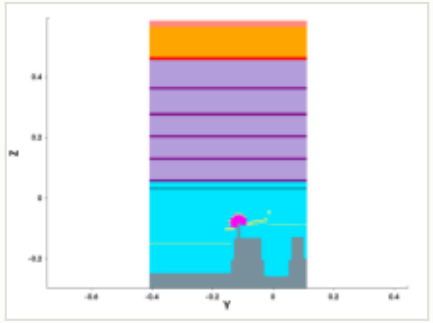

y cut at -0.150 µm

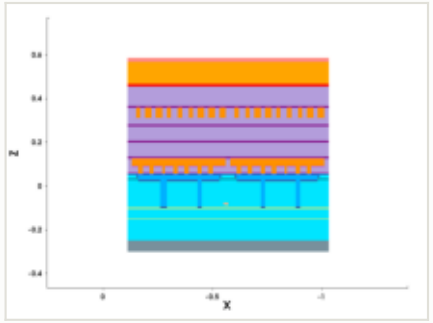

mask for this step

no mask for this step

steps by process area

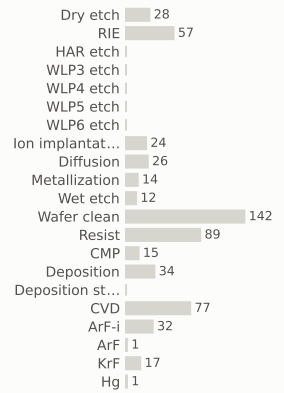

materials deposited (g)

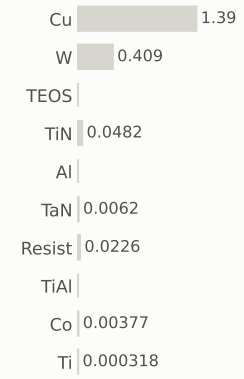

gases emitted (g)

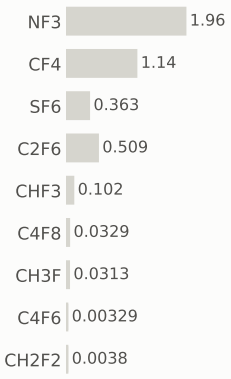

Step #7390: Spx_only

litho_patterning · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

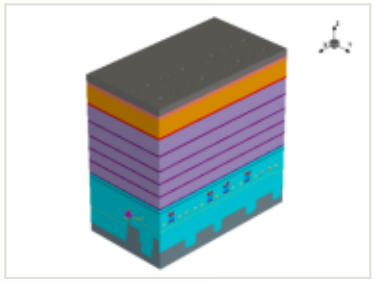

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

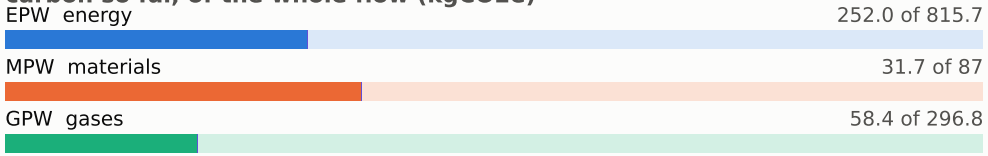

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

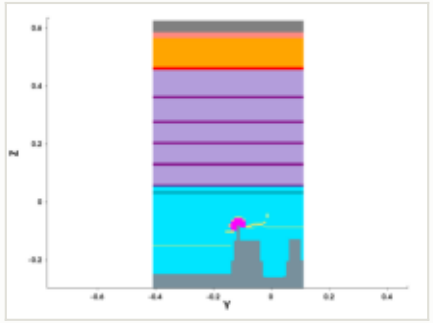

y cut at -0.150 µm

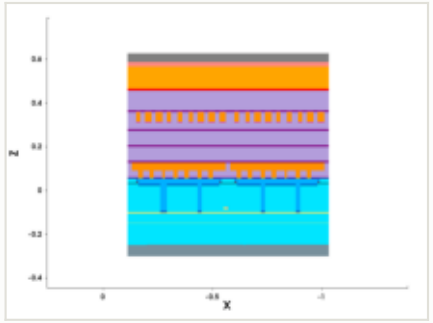

mask: layer 12451:0 (GDSII)



steps by process area

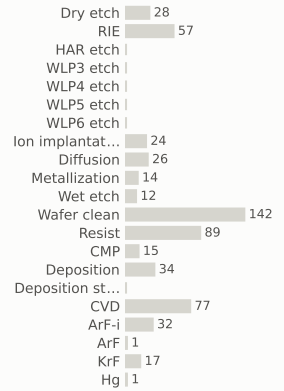

materials deposited (g)

gases emitted (g)

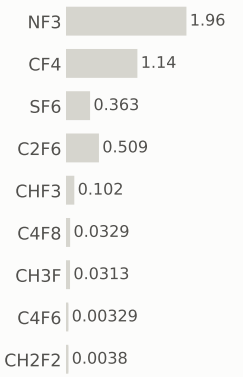

Step #7400: Spx_only

etch_anisotropic · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

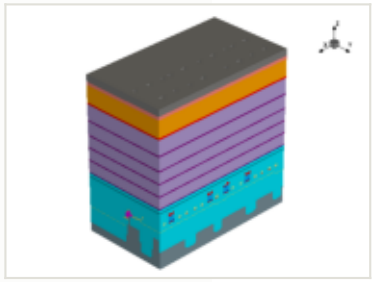

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

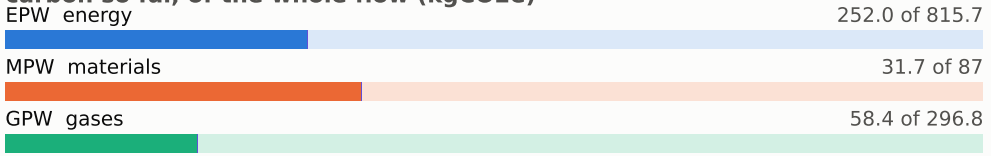

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

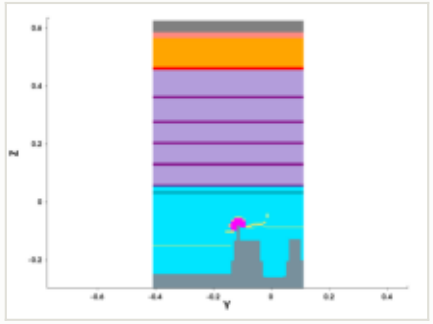

y cut at -0.150 µm

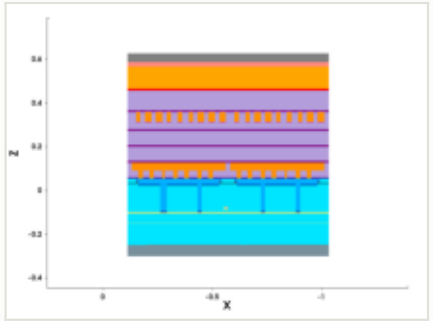

mask for this step

no mask for this step

steps by process area

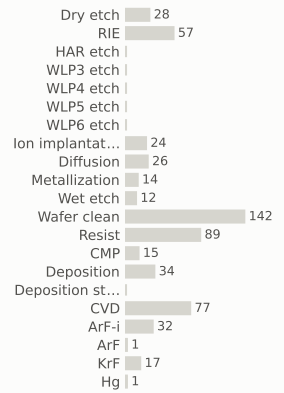

materials deposited (g)

gases emitted (g)

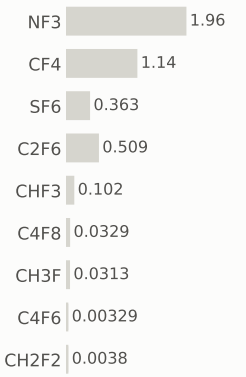

Step #7410: Spx_only

etch_strip · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

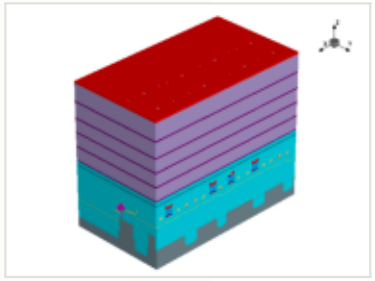

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

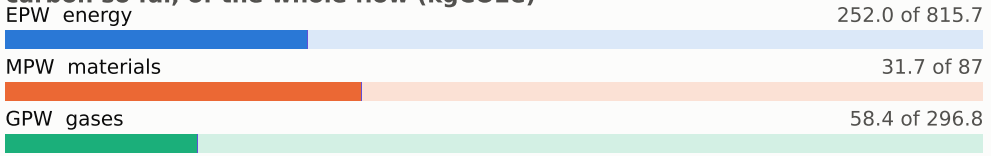

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

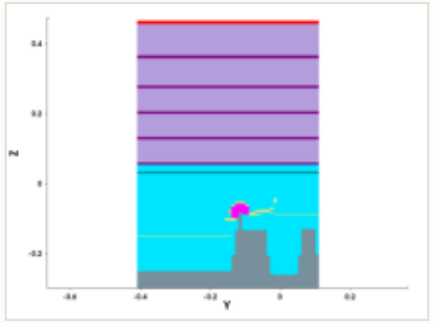

y cut at -0.150 µm

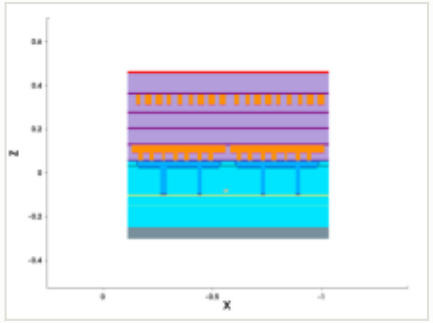

mask for this step

no mask for this step

steps by process area

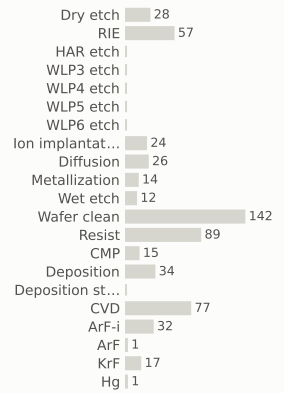

materials deposited (g)

gases emitted (g)

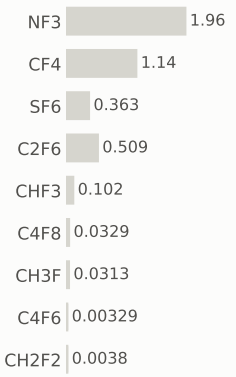

Step #7420: Spx_only

depo_fill · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

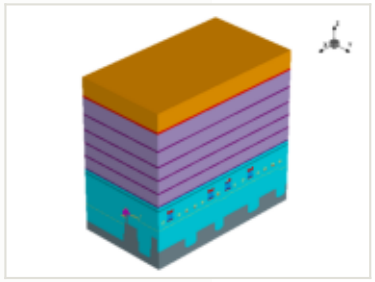

this step

process area	Spx_only
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

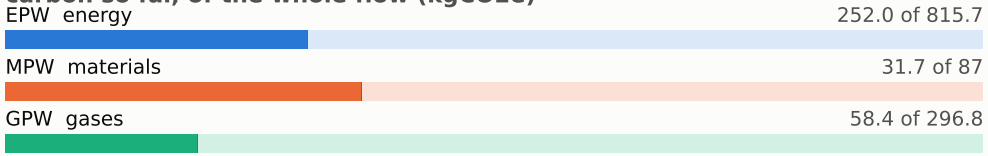

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

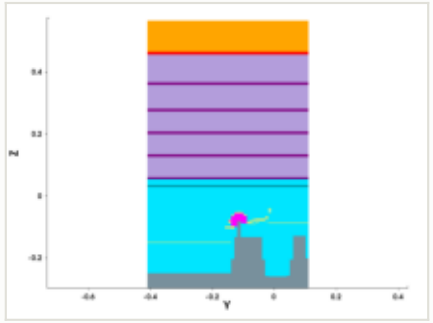

y cut at -0.150 µm

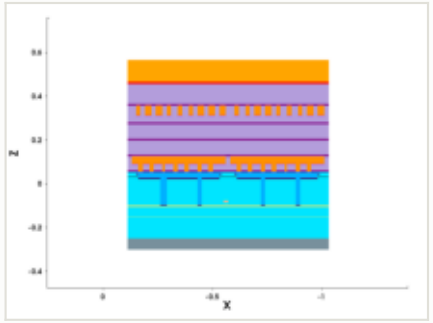

mask for this step

no mask for this step

steps by process area

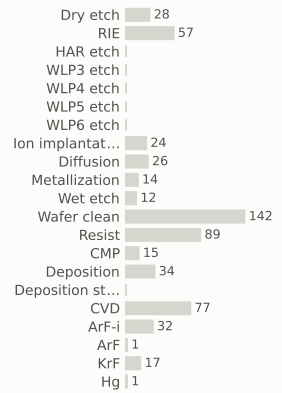

materials deposited (g)

gases emitted (g)

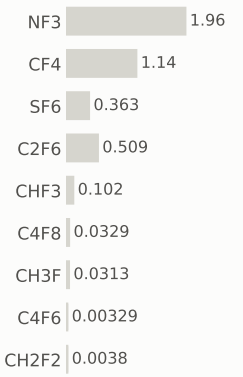

Step #7430: Spx_only

depo_fill · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

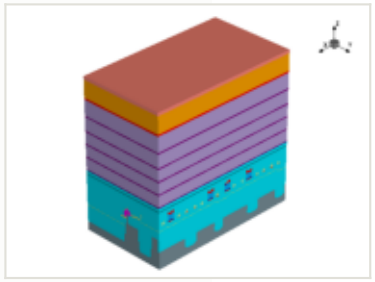

this step

process area	Spx_only
material	—
thickness	0.02 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

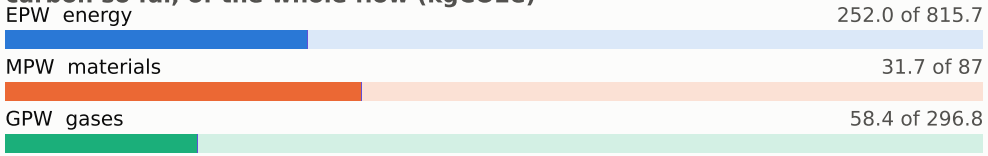

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

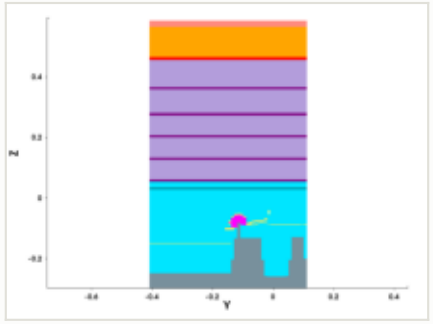

y cut at -0.150 µm

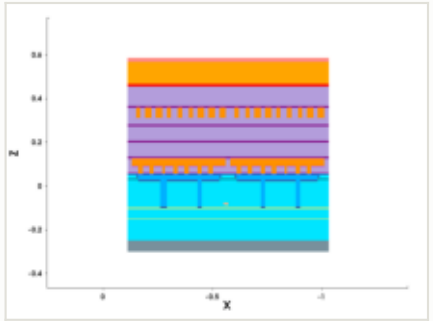

mask for this step

no mask for this step

steps by process area

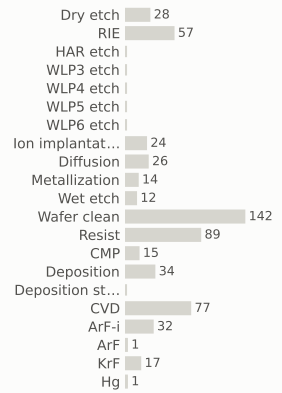

materials deposited (g)

gases emitted (g)

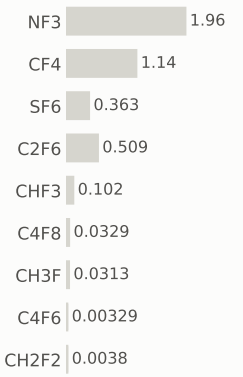

Step #7440: Spx_only

litho_patterning · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

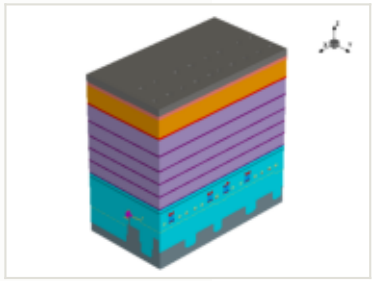

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

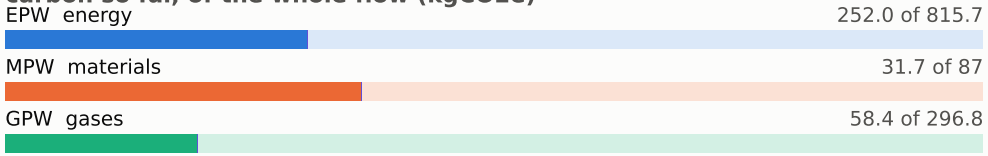

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

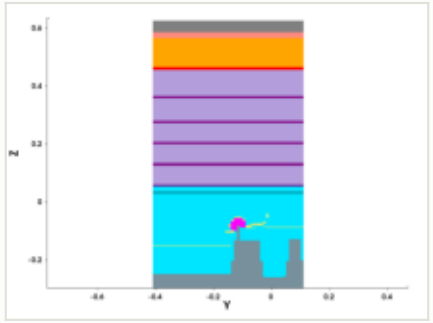

y cut at -0.150 µm

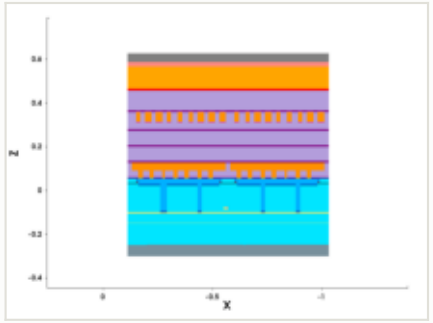

mask: layer 12452:0 (GDSII)



steps by process area

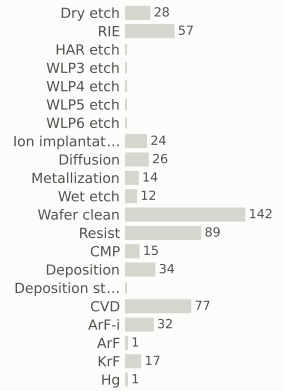

materials deposited (g)

gases emitted (g)

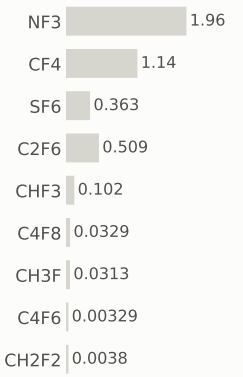

Step #7450: Spx_only

etch_anisotropic · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

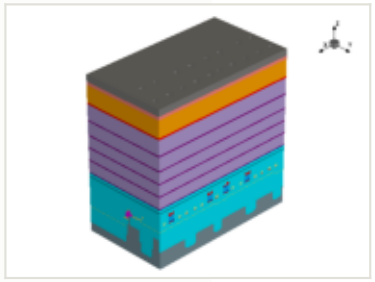

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

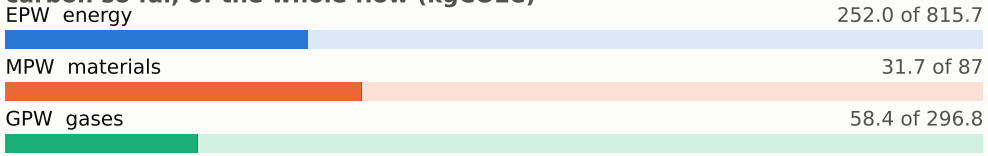

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

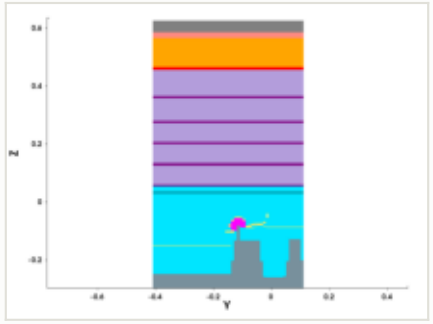

y cut at -0.150 µm

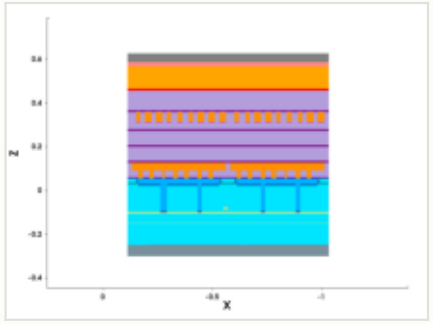

mask for this step

no mask for this step

steps by process area

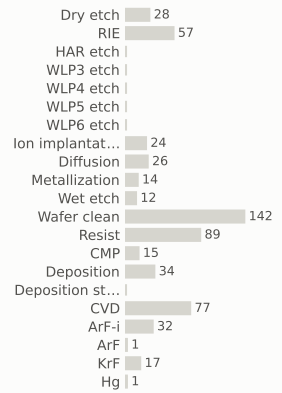

materials deposited (g)

gases emitted (g)

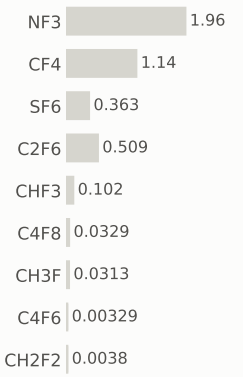

Step #7460: Spx_only

etch_strip · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

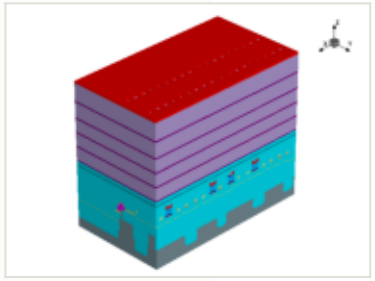

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

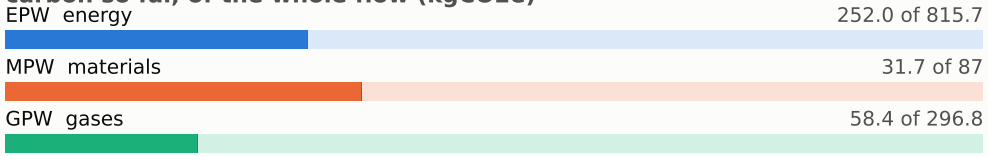

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

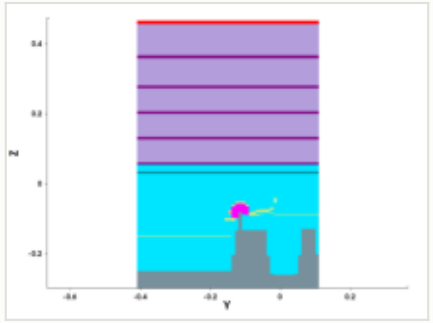

y cut at -0.150 µm

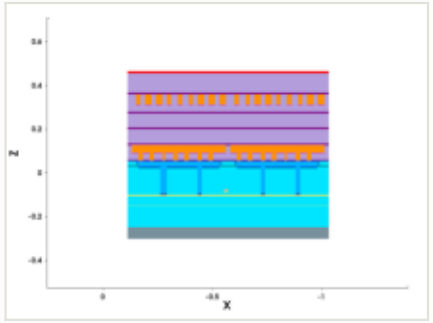

mask for this step

no mask for this step

steps by process area

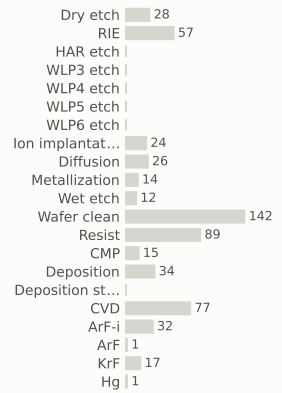

materials deposited (g)

gases emitted (g)

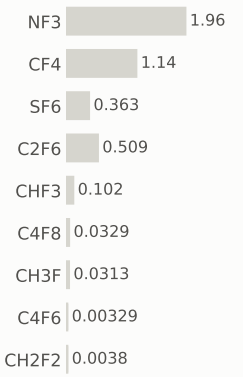

Step #7470: Spx_only

depo_ellipsoidal · Spx_only

4.00e-05	342.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

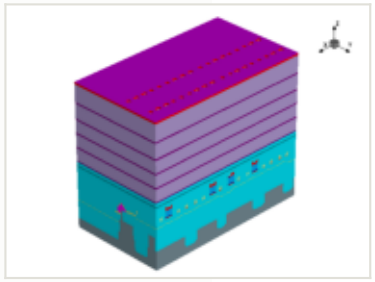

this step

process area	Spx_only
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**4.00e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 252.0 of 815.7

MPW materials 31.7 of 87 (this step +4.00e-05)

GPW gases 58.4 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

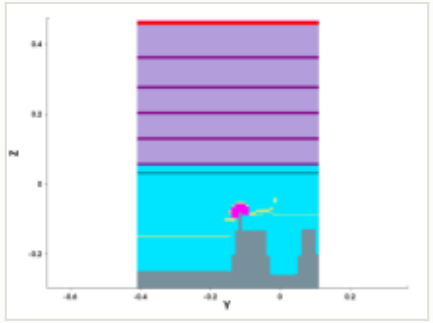

y cut at -0.150 µm

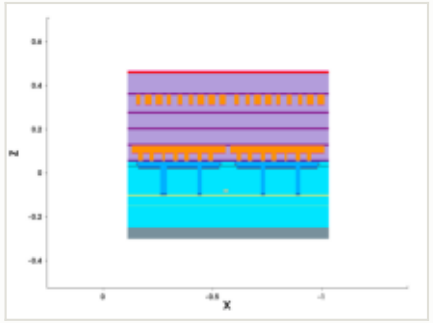

mask for this step

no mask for this step

steps by process area

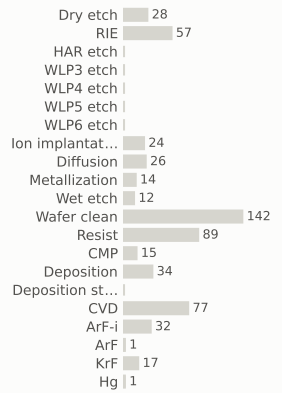

materials deposited (g)

gases emitted (g)

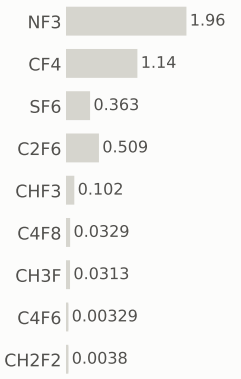

Step #7480: Spx_only

depo_fill · Spx_only

0.00212	342.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

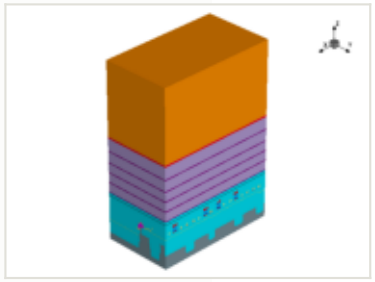

this step

process area	Spx_only
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.00212 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

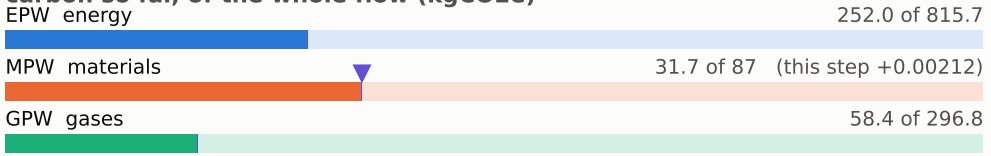

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

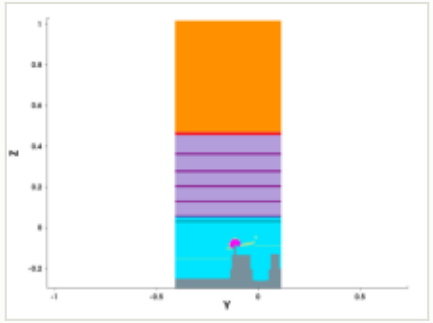

y cut at -0.150 µm

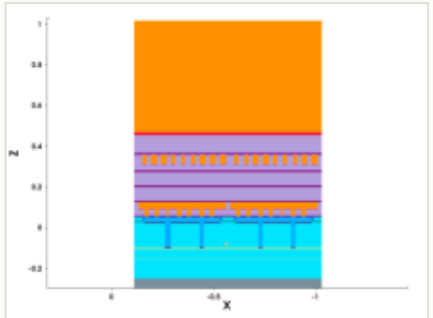

mask for this step

no mask for this step

steps by process area

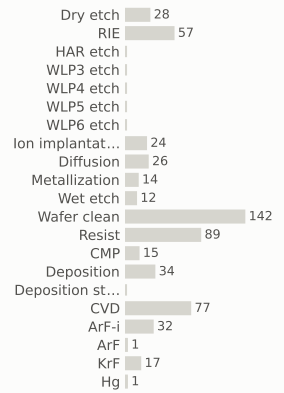

materials deposited (g)

gases emitted (g)

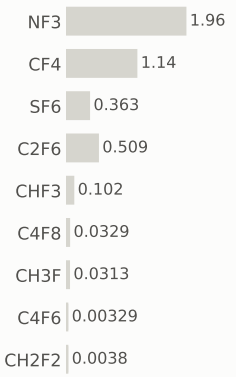

Step #7490: Spx_only

etch_cmp · Spx_only

0	342.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

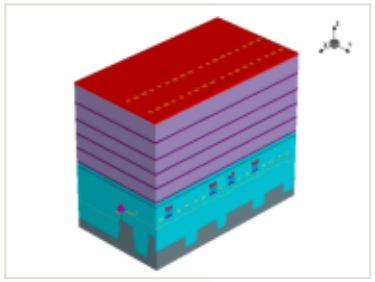

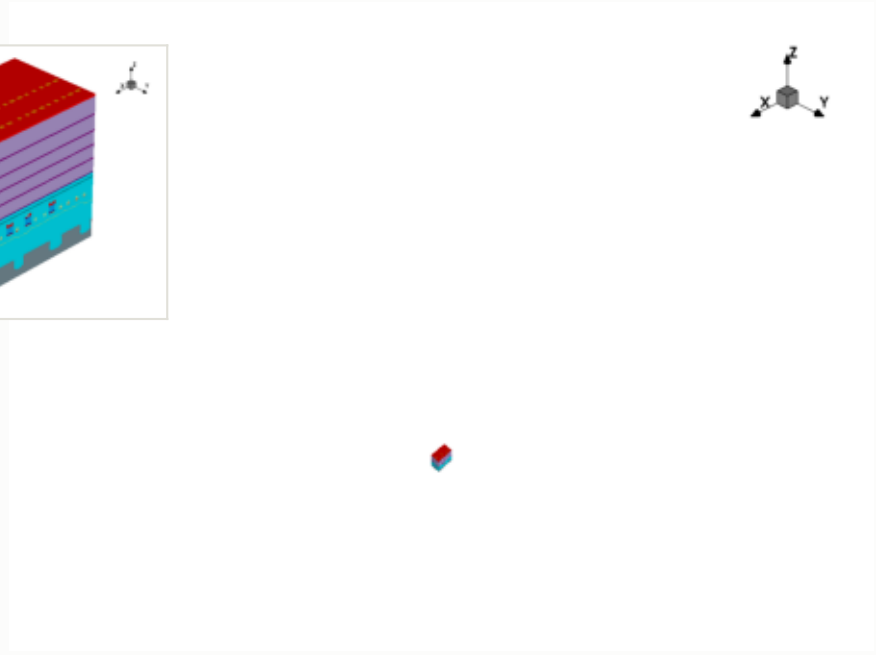

x cut at -0.570 µm

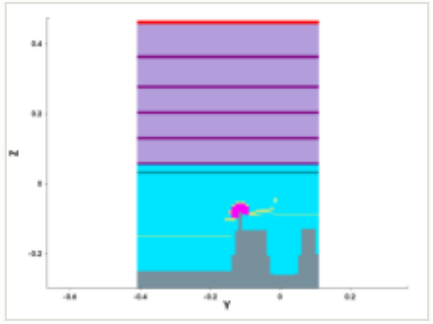

y cut at -0.150 µm

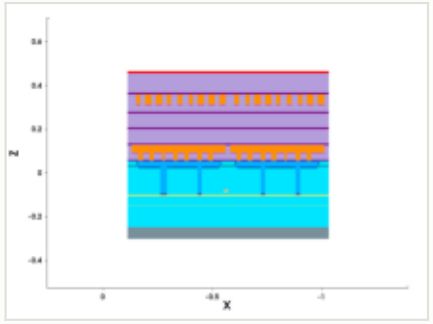

mask for this step

no mask for this step

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

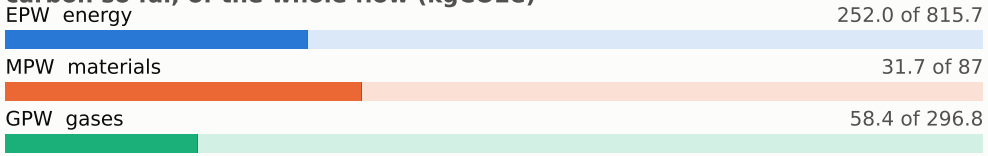

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

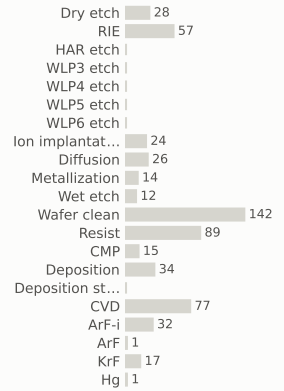

materials deposited (g)

gases emitted (g)

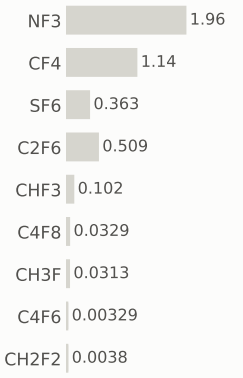

Step #7500: Deposition

depo_fill · Deposition

0.657	342.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

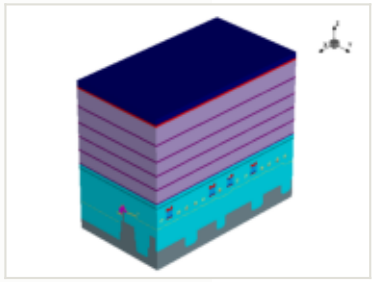

this step

process area	Deposition
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000486 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.657 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

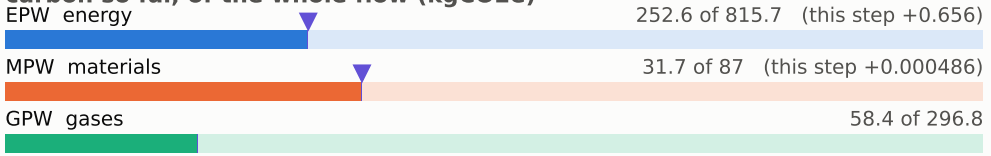

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

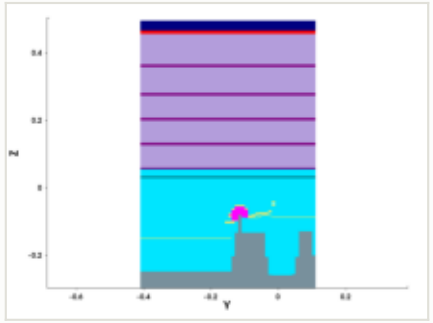

y cut at -0.150 µm

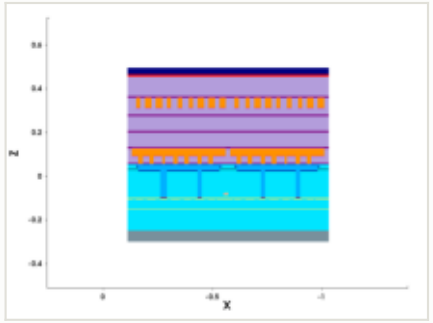

mask for this step

no mask for this step

steps by process area

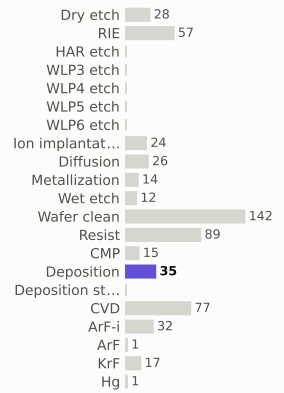

materials deposited (g)

gases emitted (g)

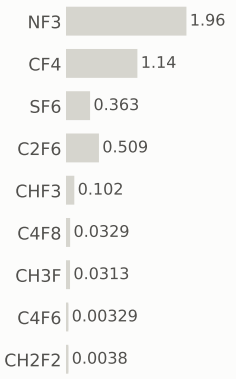

Step #7510: Wafer_clean

clean · Wafer_clean

0.169	343.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

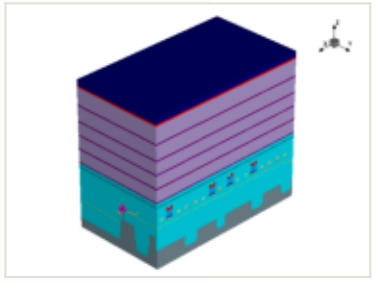

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

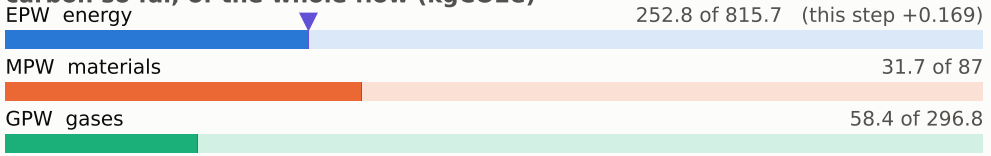

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

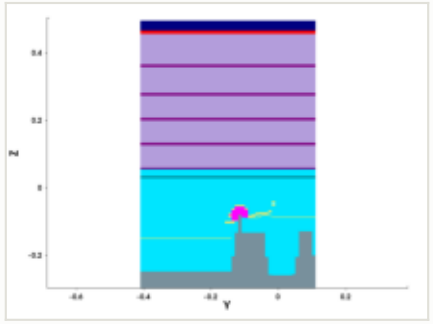

y cut at -0.150 µm

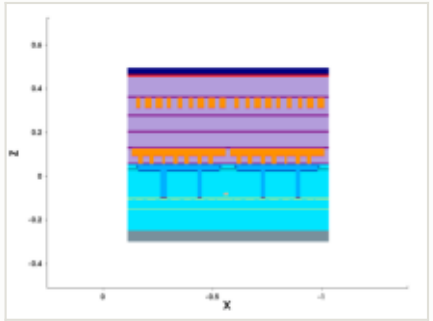

mask for this step

no mask for this step

steps by process area

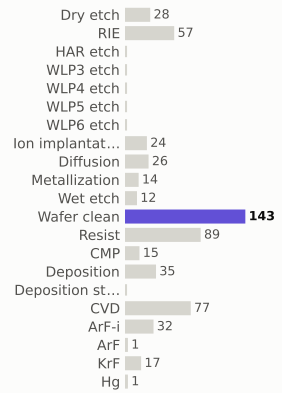

materials deposited (g)



gases emitted (g)

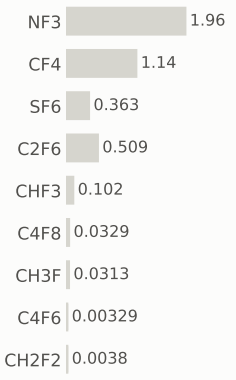

Step #7520: CVD

depo_fill · CVD

1.31	344.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

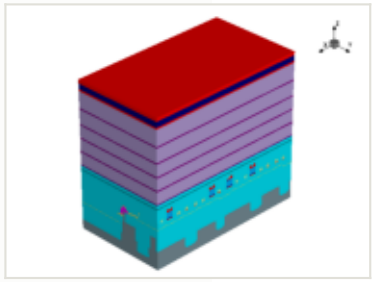

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

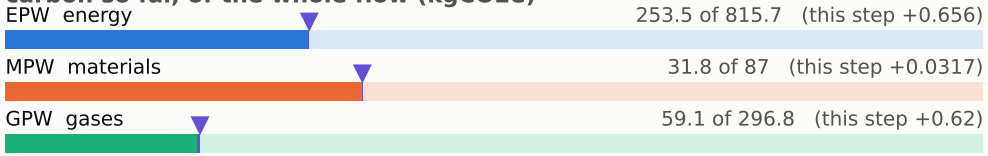

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

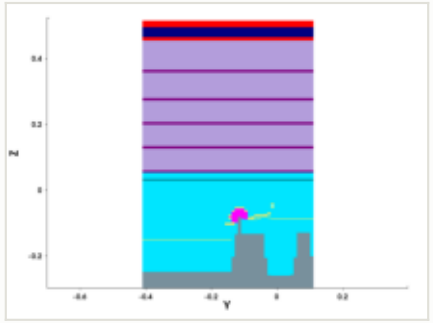

y cut at -0.150 µm

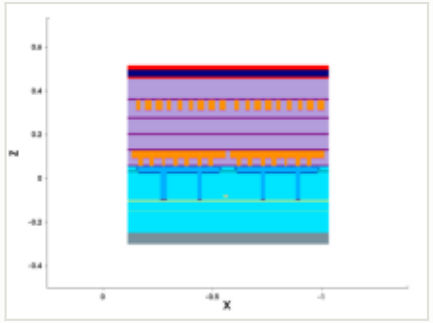

mask for this step

no mask for this step

steps by process area

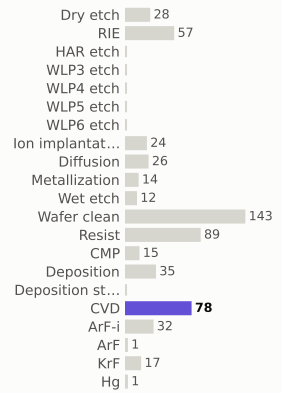

materials deposited (g)

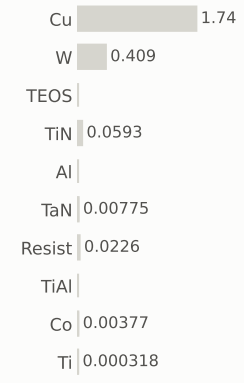

gases emitted (g)

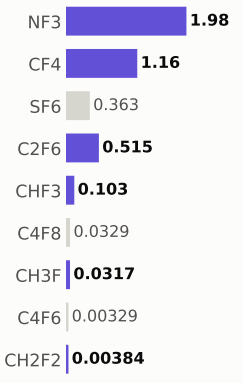

Step #7530: Spx_only

depo_fill · Spx_only

0	344.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

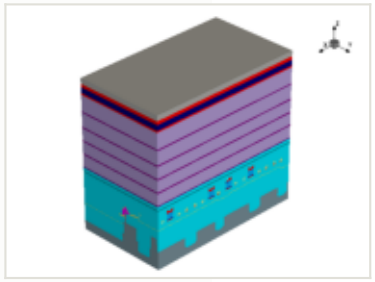

this step

process area	Spx_only
material	—
thickness	0.03 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

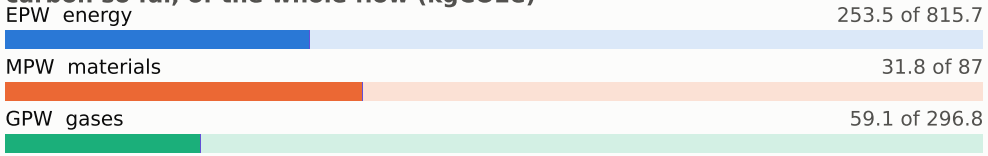

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

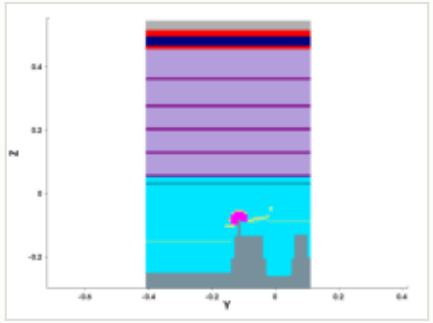

y cut at -0.150 µm

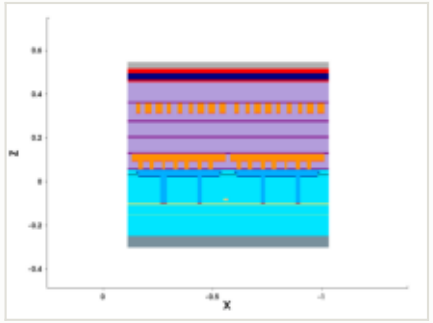

mask for this step

no mask for this step

steps by process area

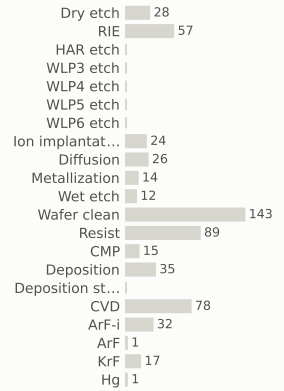

materials deposited (g)

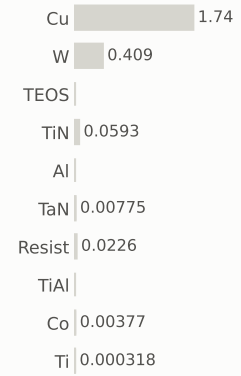

gases emitted (g)

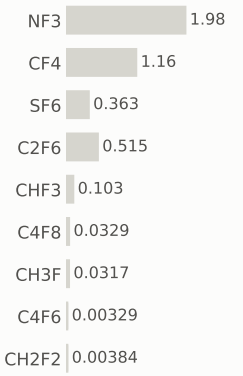

Step #7540: Resist

depo_fill · Resist

0.169	344.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

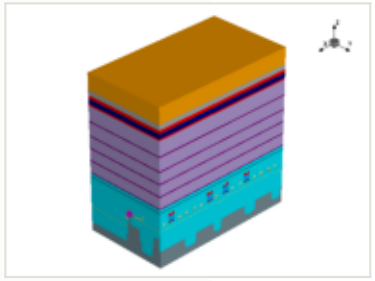

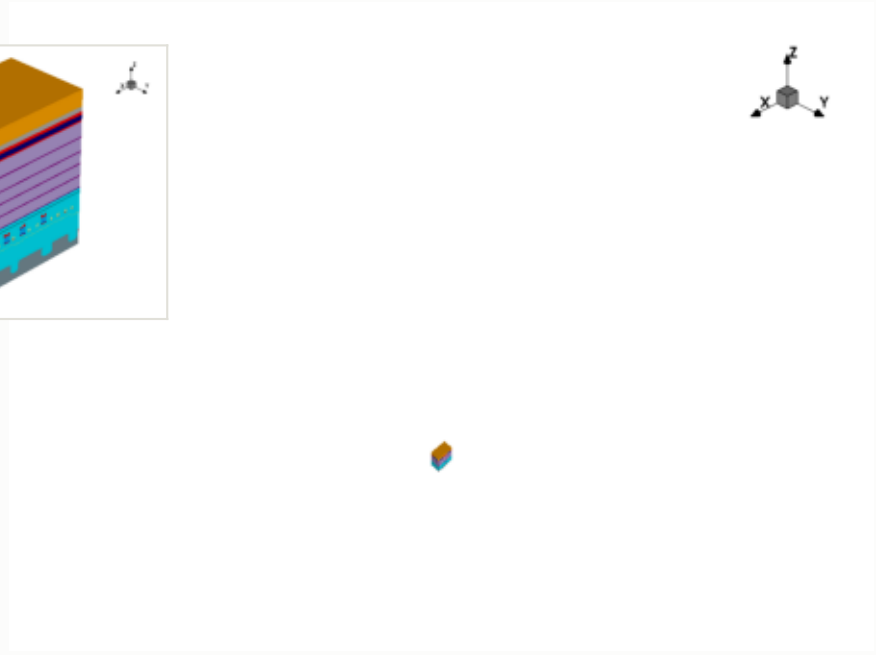

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

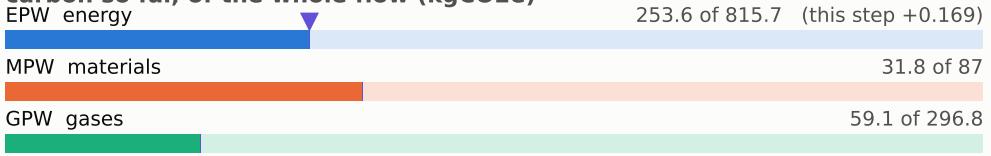

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

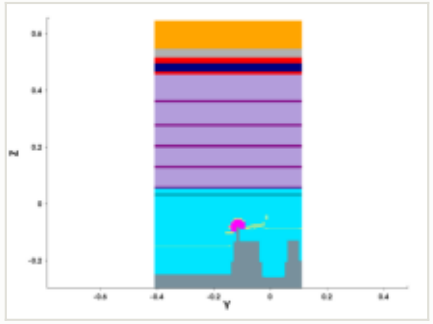

y cut at -0.150 µm

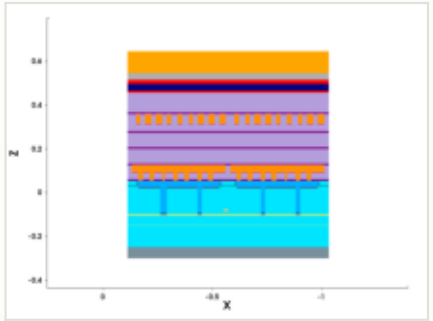

mask for this step

no mask for this step

steps by process area

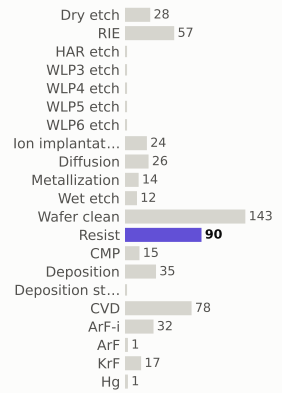

materials deposited (g)

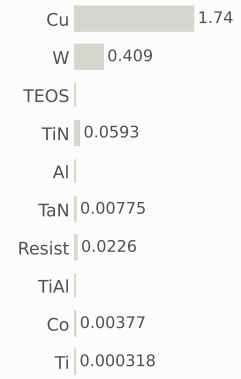

gases emitted (g)

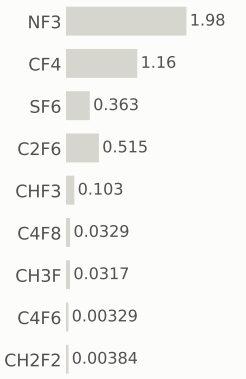

Step #7550: CVD

depo_fill · CVD

1.31	345.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

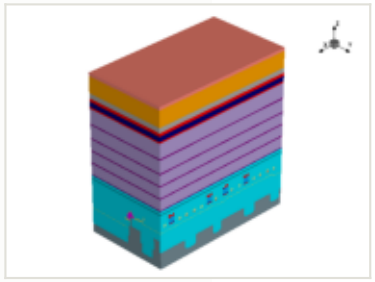

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

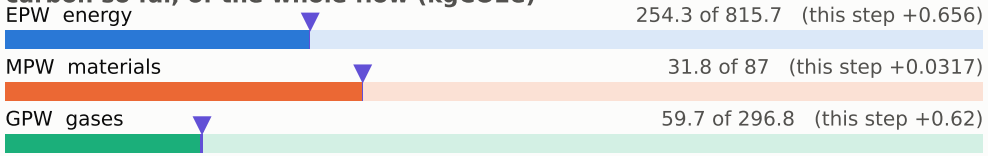

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

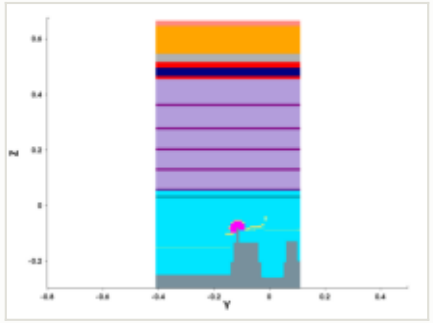

y cut at -0.150 µm

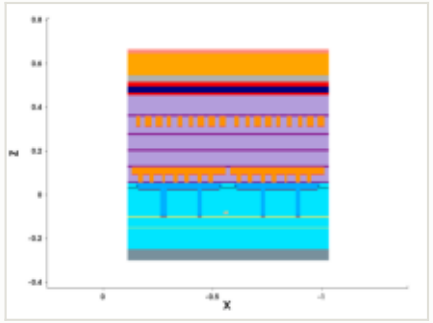

mask for this step

no mask for this step

steps by process area

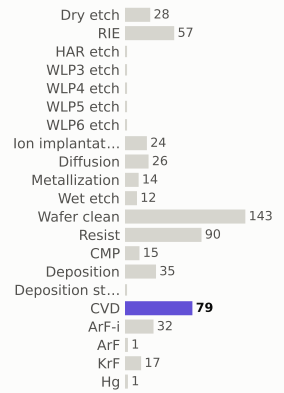

materials deposited (g)

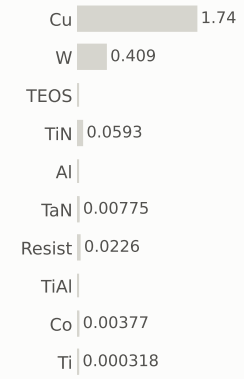

gases emitted (g)

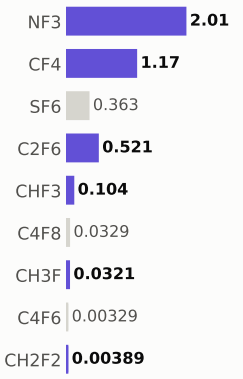

Step #7560: Wafer_clean

clean · Wafer_clean

0.169	345.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

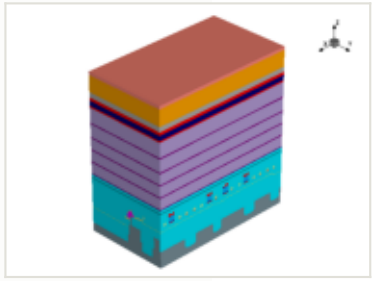

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

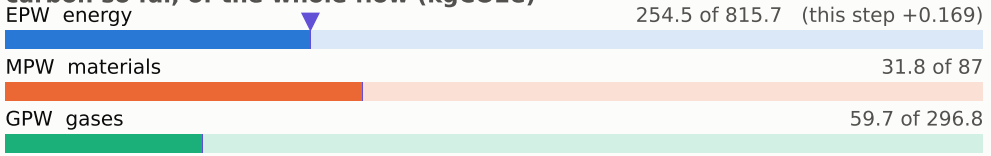

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

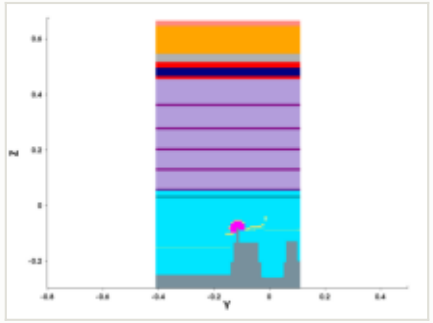

y cut at -0.150 µm

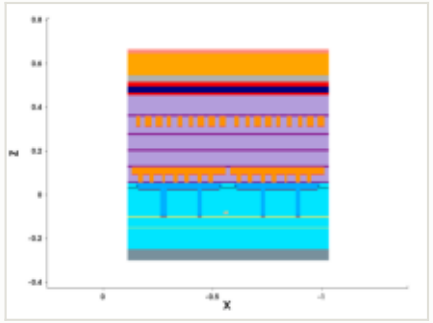

mask for this step

no mask for this step

steps by process area

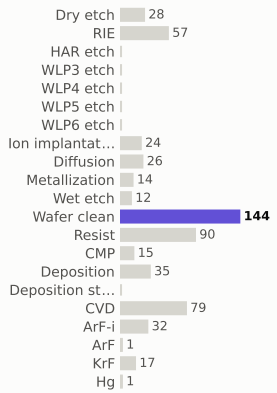

materials deposited (g)

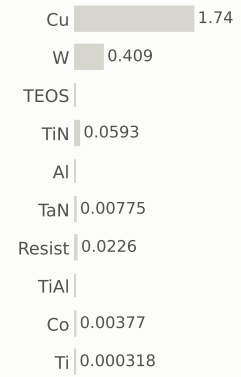

gases emitted (g)

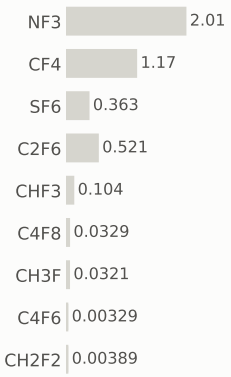

Step #7570: Resist

resist · Resist

0.169	346.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

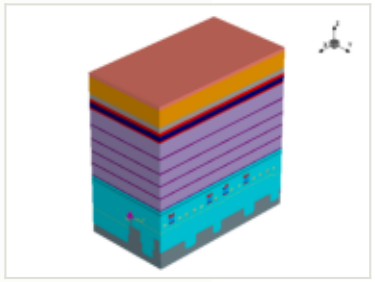

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

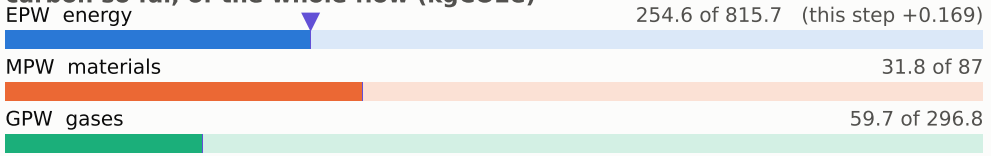

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

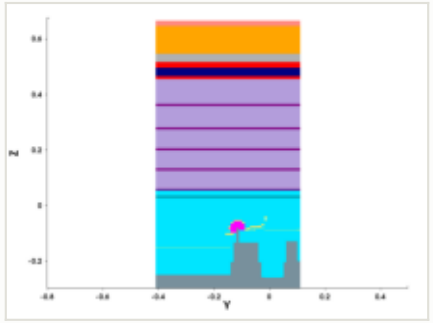

y cut at -0.150 µm

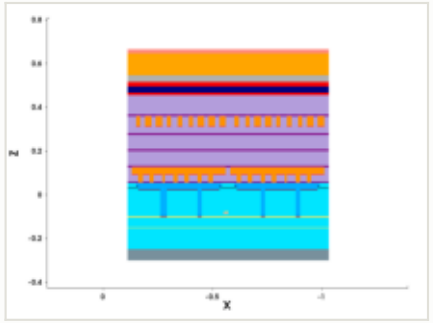

mask for this step

no mask for this step

steps by process area

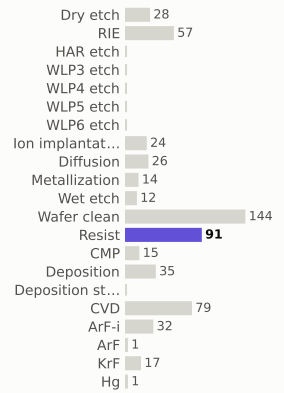

materials deposited (g)

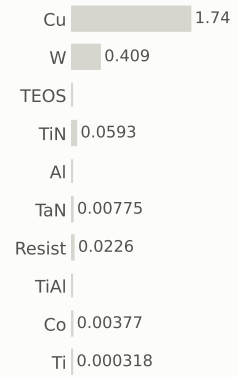

gases emitted (g)

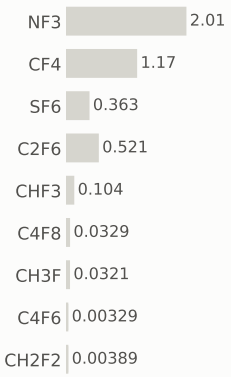

Step #7580: ArF-i

litho_patterning · ArF-i

0.217	346.3	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

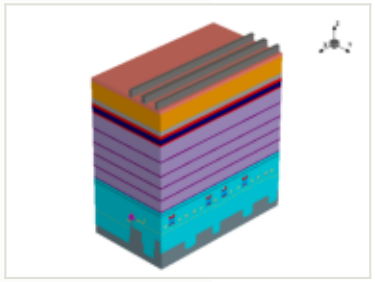

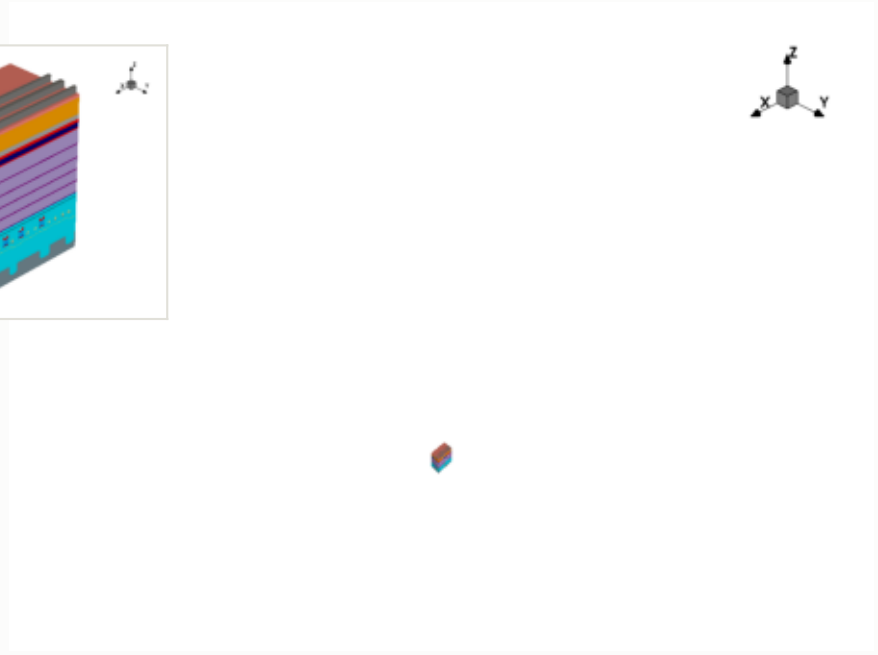

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

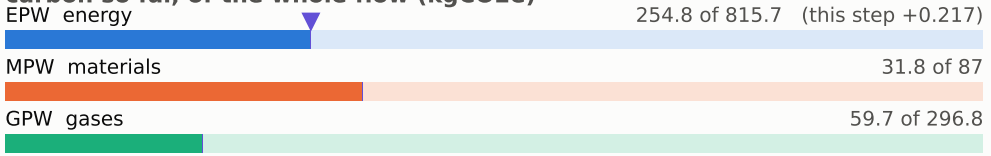

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

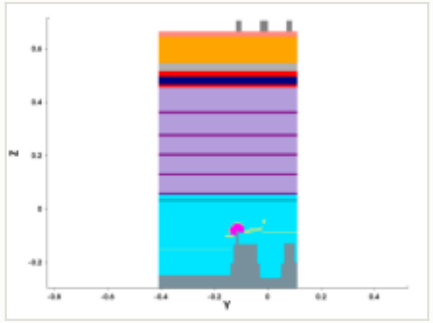

y cut at -0.150 µm

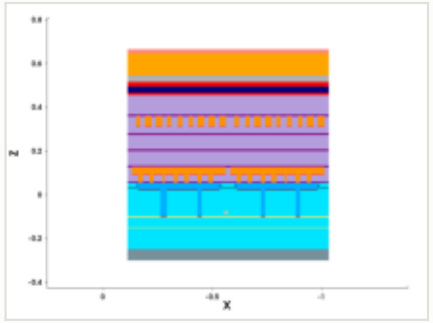

mask: layer 12501:0, positive (GDSII)

steps by process area

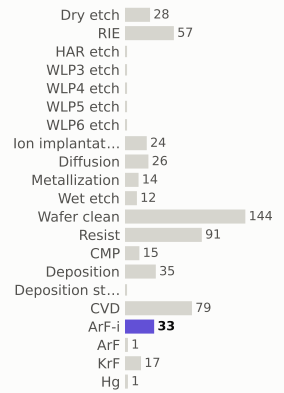

materials deposited (g)

gases emitted (g)

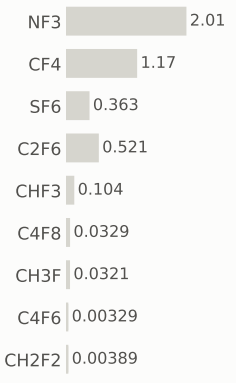

Step #7590: RIE

etch_anisotropic · RIE

1.04	347.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

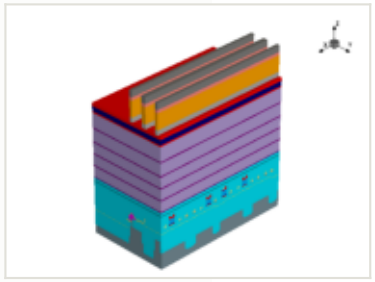

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

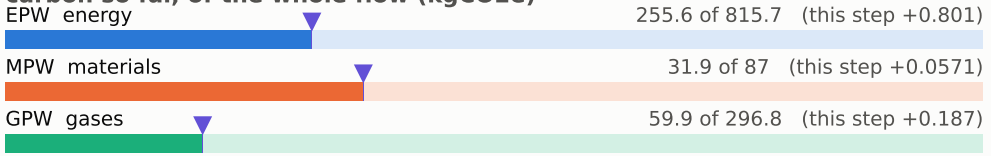

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

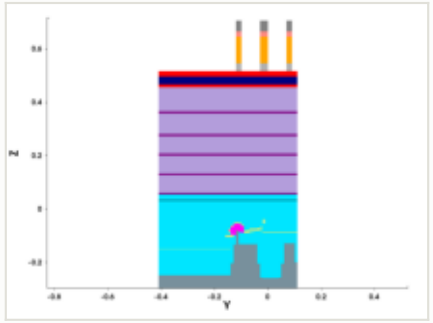

y cut at -0.150 µm

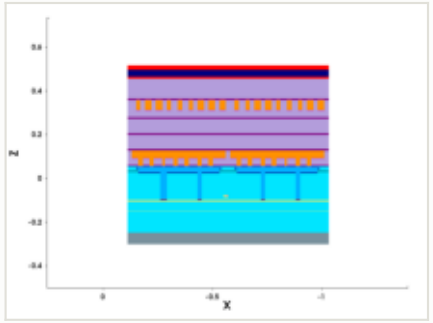

mask for this step

no mask for this step

steps by process area

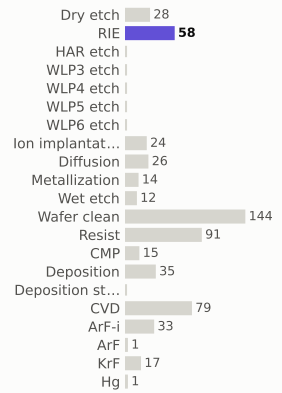

materials deposited (g)

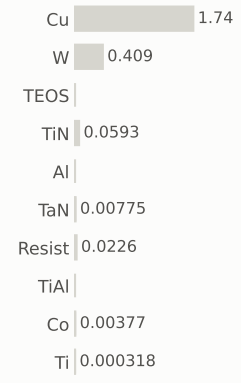

gases emitted (g)

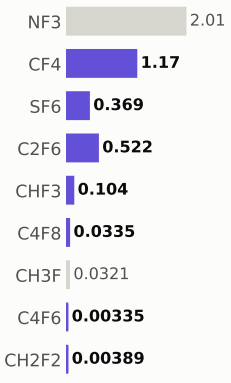

Step #7600: Spx_only

etch_strip · Spx_only

0	347.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

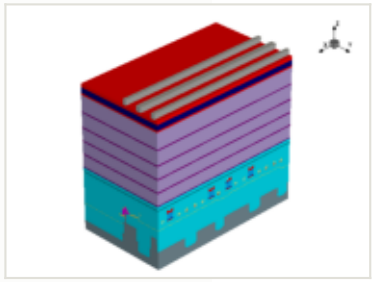

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

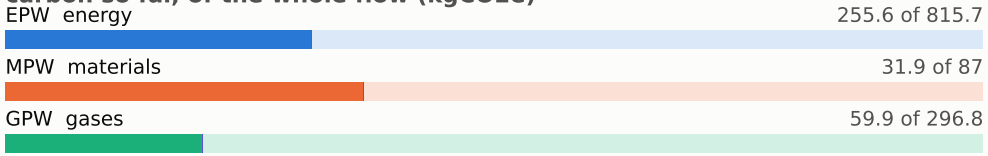

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

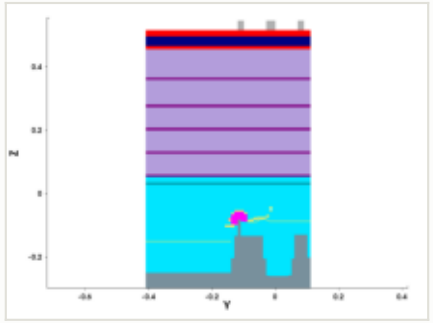

y cut at -0.150 µm

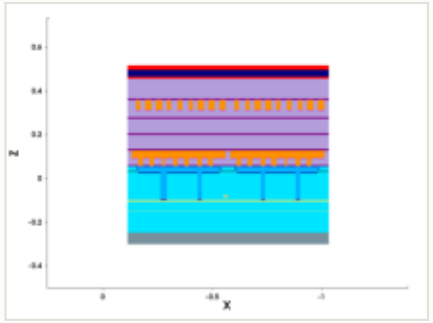

mask for this step

no mask for this step

steps by process area

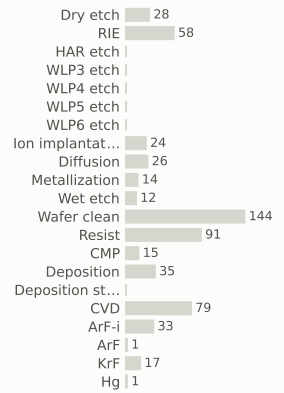

materials deposited (g)

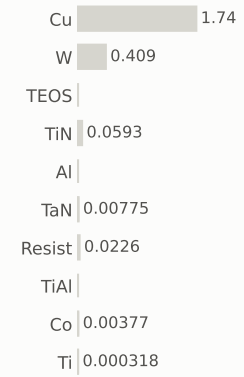

gases emitted (g)

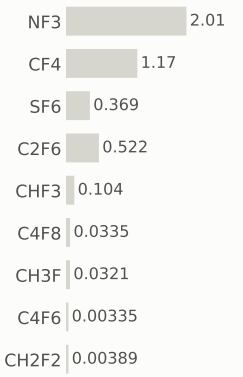

Step #7610: Spx_only

depo_isotropic · Spx_only

0	347.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

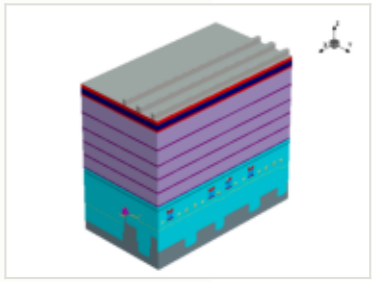

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.001 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

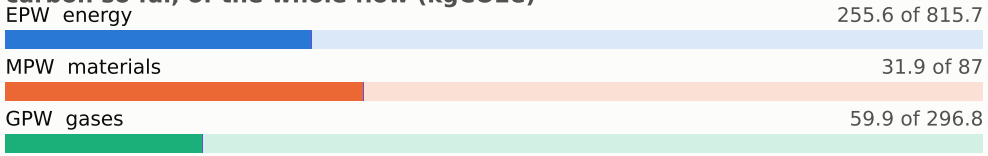

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

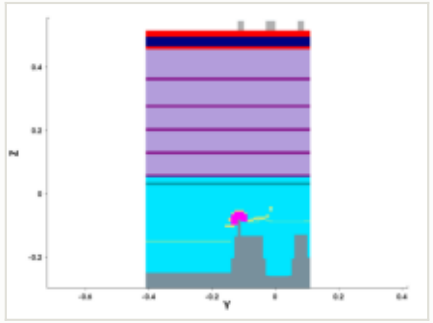

y cut at -0.150 µm

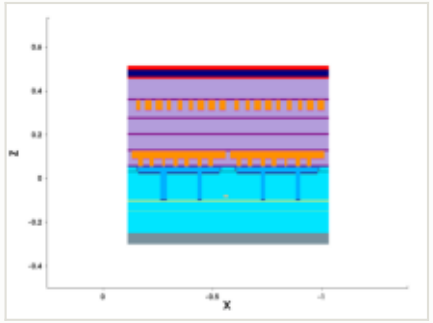

mask for this step

no mask for this step

steps by process area

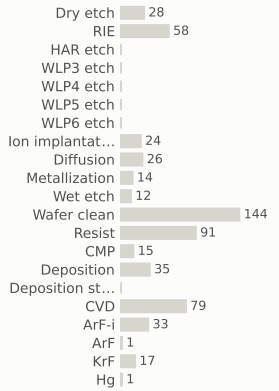

materials deposited (g)

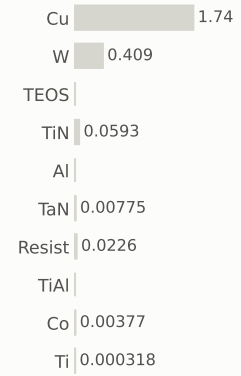

gases emitted (g)

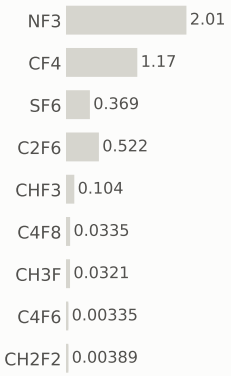

Step #7620: Spx_only

etch_anisotropic · Spx_only

0	347.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

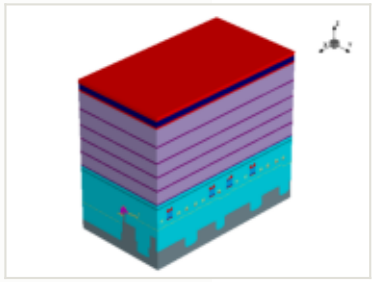

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 255.6 of 815.7

MPW materials 31.9 of 87

GPW gases 59.9 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

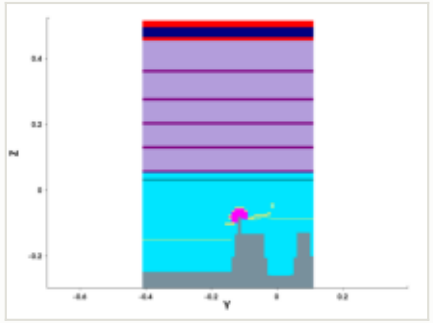

y cut at -0.150 µm

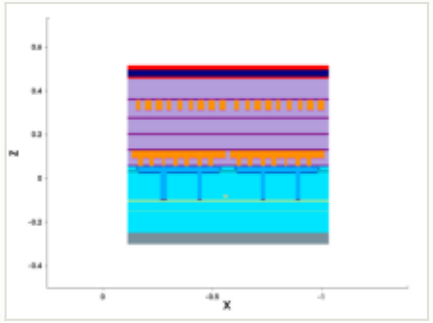

mask for this step

no mask for this step

steps by process area

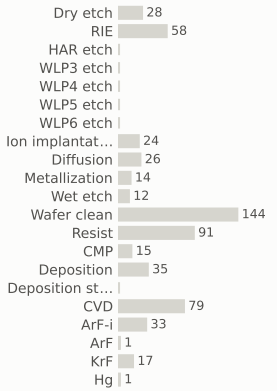

materials deposited (g)

gases emitted (g)



Step #7630: Spx_only

etch_strip · Spx_only

0	347.4	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

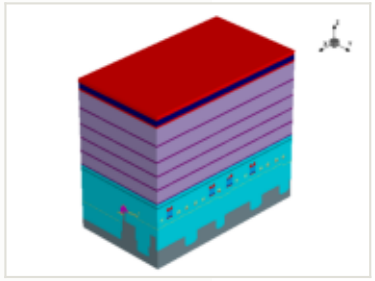

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

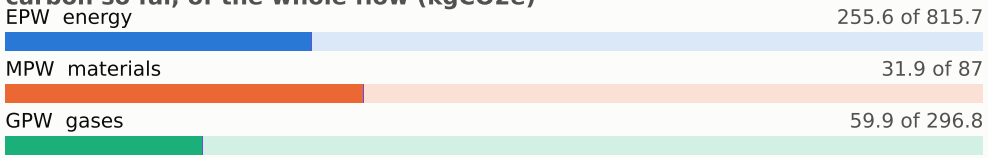

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

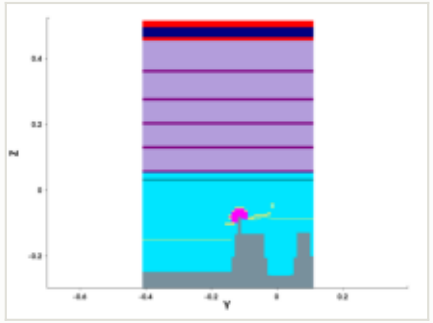

y cut at -0.150 µm

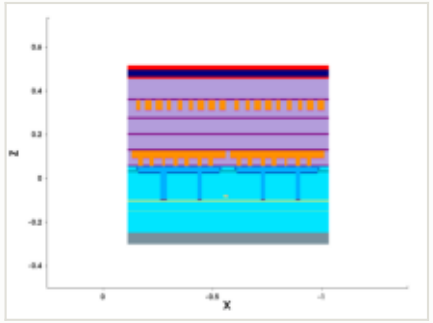

mask for this step

no mask for this step

steps by process area

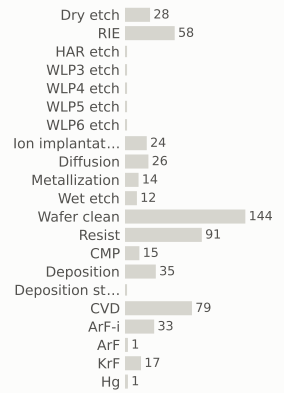

materials deposited (g)

gases emitted (g)

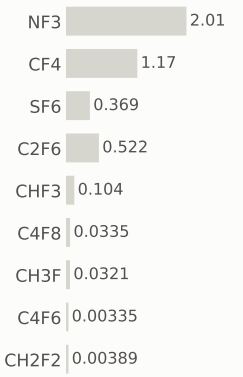

Step #7640: Wafer_clean

clean · Wafer_clean

0.169	347.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

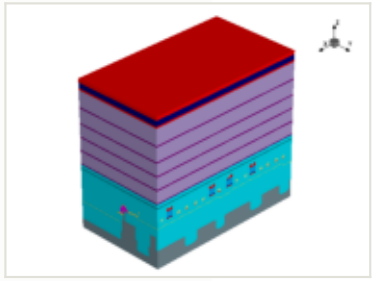

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

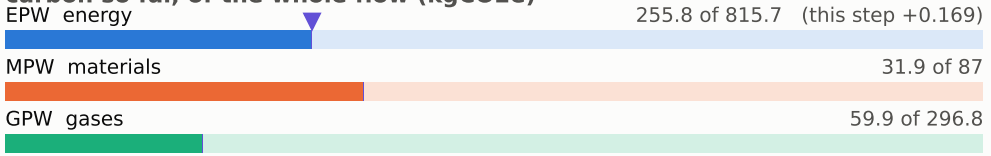

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

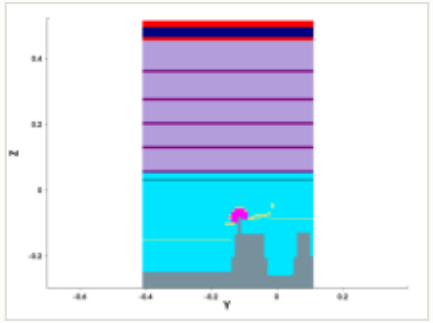

y cut at -0.150 µm

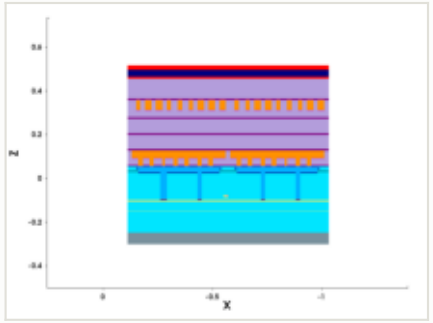

mask for this step

no mask for this step

steps by process area

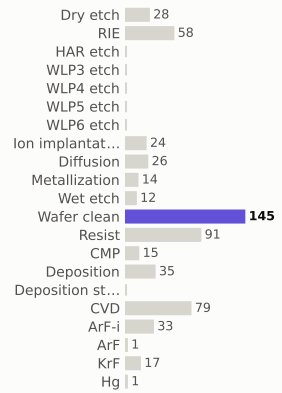

materials deposited (g)

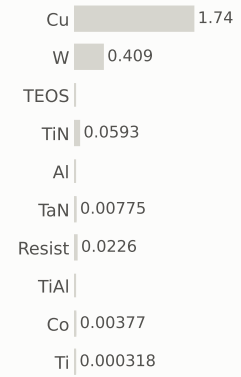

gases emitted (g)

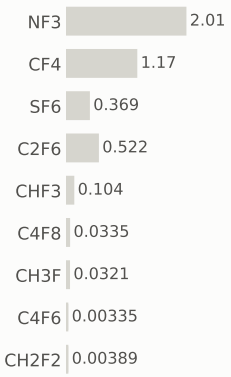

Step #7650: Resist

depo_fill · Resist

0.169	347.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

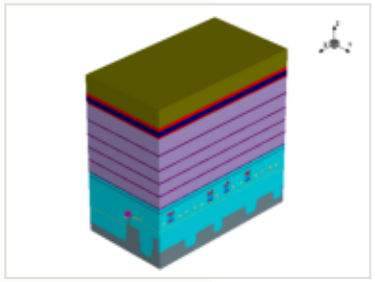

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	0.1 µm	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

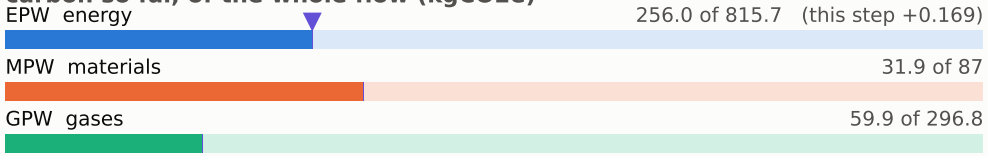

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

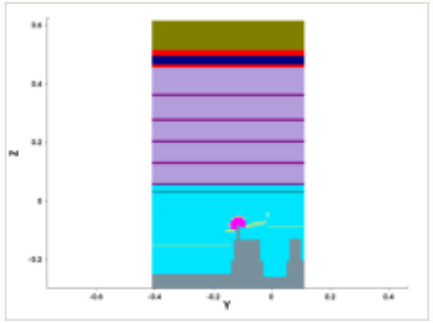

y cut at -0.150 µm

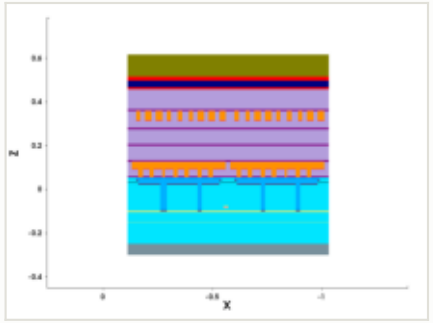

mask for this step

no mask for this step

steps by process area

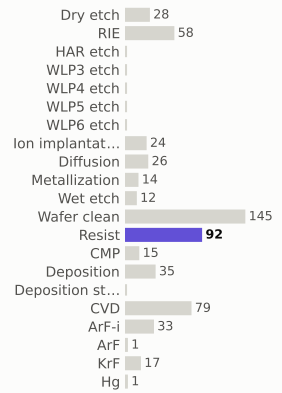

materials deposited (g)

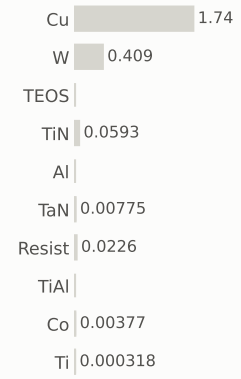

gases emitted (g)

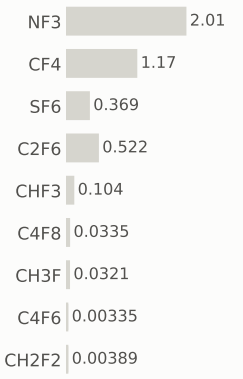

Step #7660: CVD

depo_isotropic · CVD

1.31	349.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

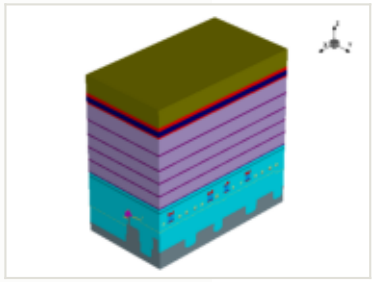

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

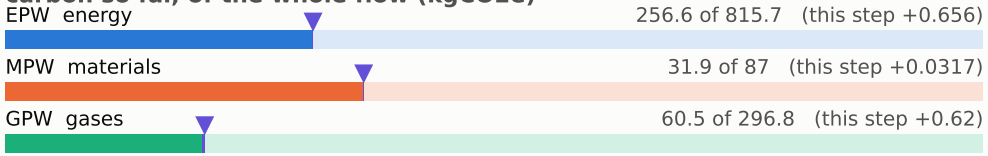

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

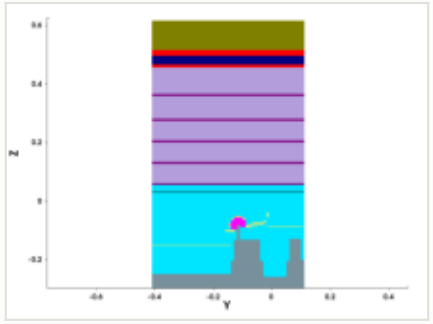

y cut at -0.150 µm

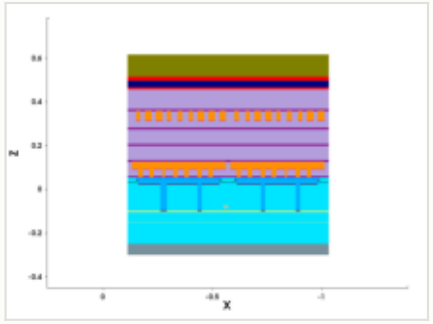

mask for this step

no mask for this step

steps by process area

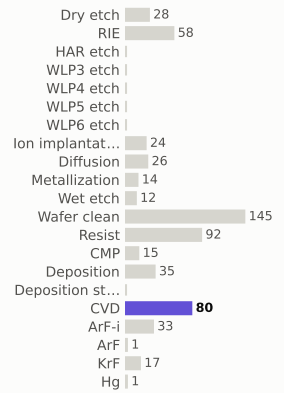

materials deposited (g)



gases emitted (g)

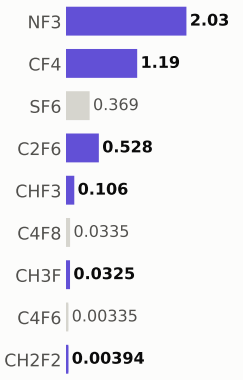

Step #7670: Wafer_clean

clean · Wafer_clean

0.169	349.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

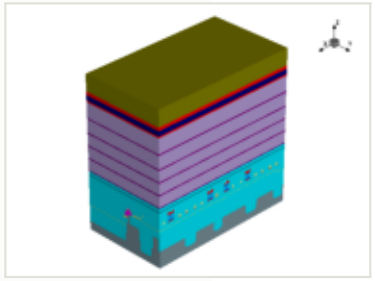

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

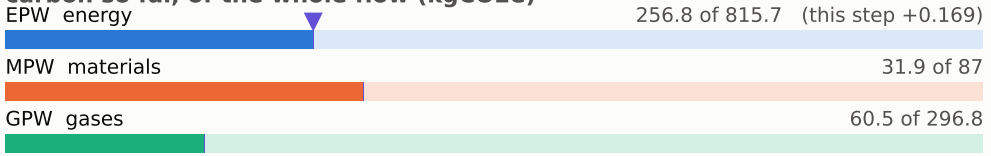

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

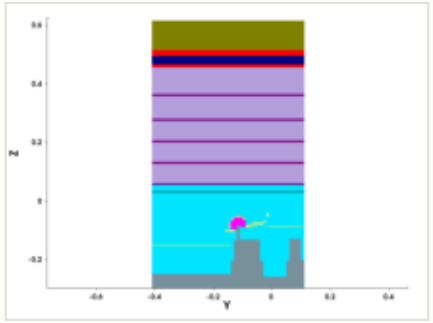

y cut at -0.150 µm

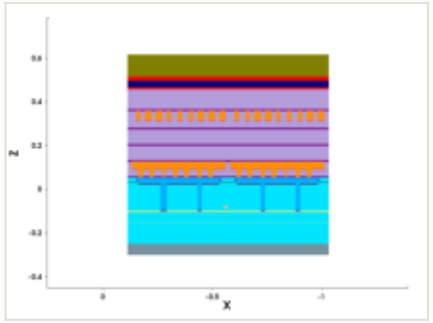

mask for this step

no mask for this step

steps by process area

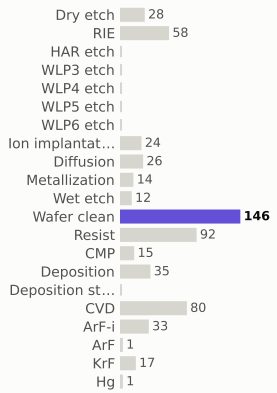

materials deposited (g)

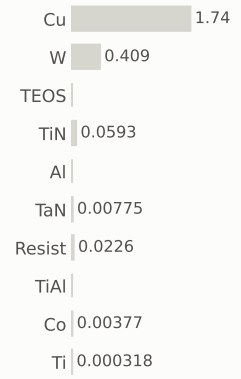

gases emitted (g)

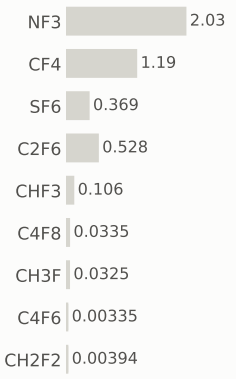

Step #7680: Resist

resist · Resist

0.169	349.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

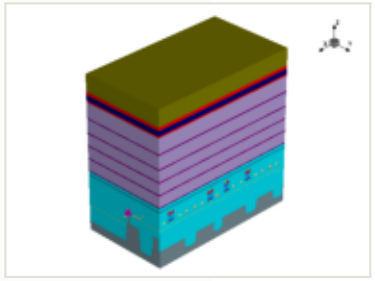

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

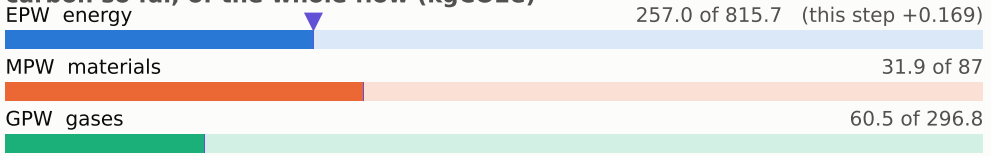

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

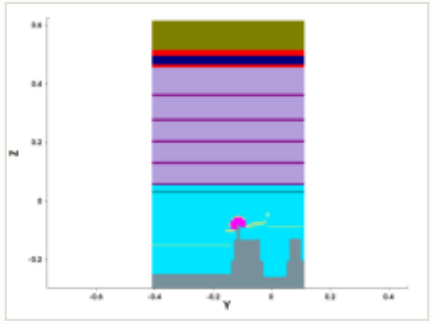

y cut at -0.150 µm

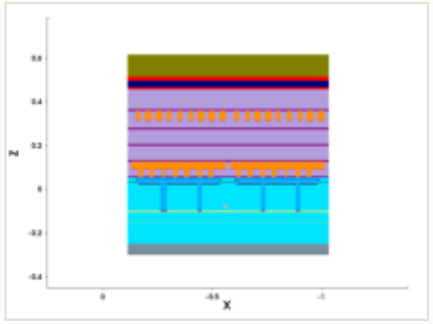

mask for this step

no mask for this step

steps by process area

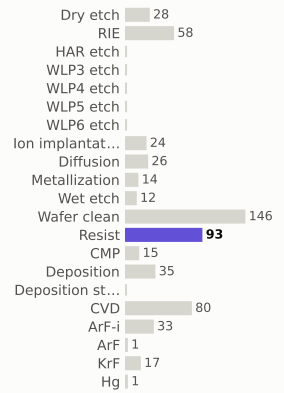

materials deposited (g)

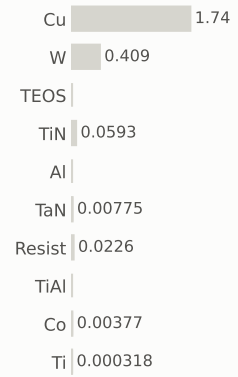

gases emitted (g)

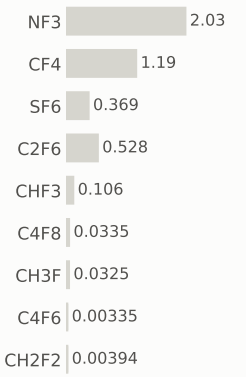

Step #7690: ArF-i

litho_patterning · ArF-i

0.217	349.6	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

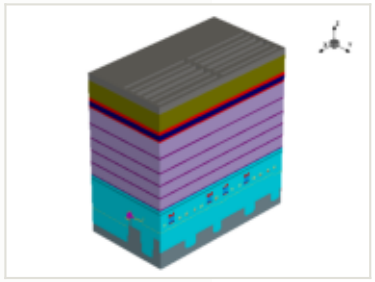

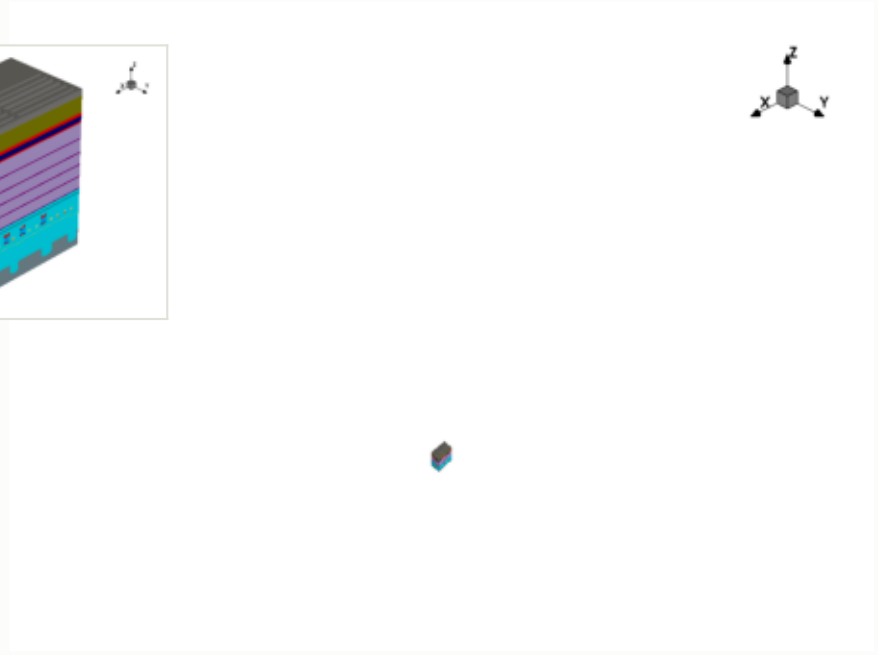

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

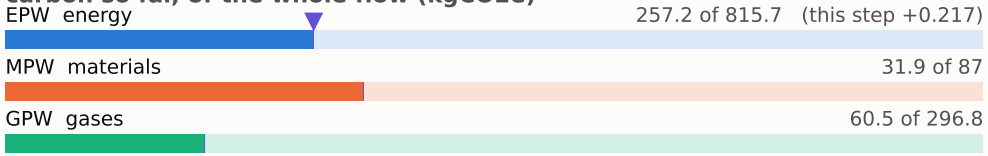

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

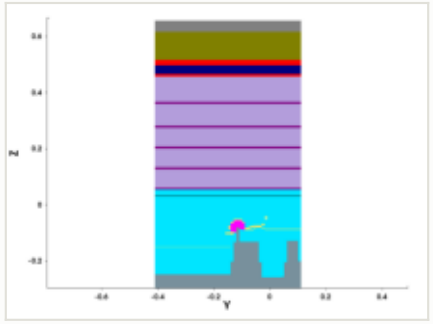

y cut at -0.150 µm

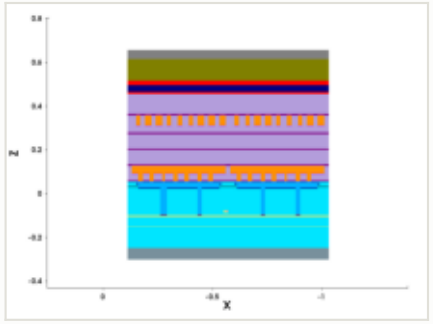

mask: layer 2050:0 (GDSII)



steps by process area

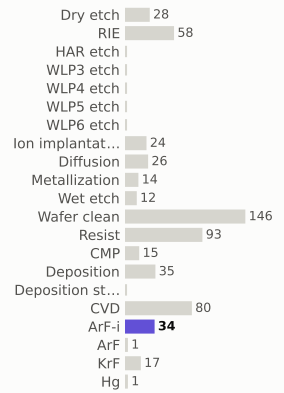

materials deposited (g)

gases emitted (g)

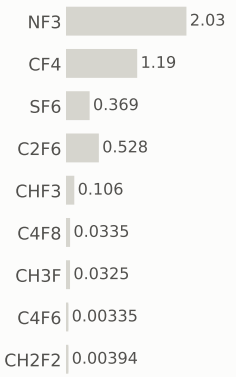

Step #7700: RIE

etch_anisotropic · RIE

1.04	350.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

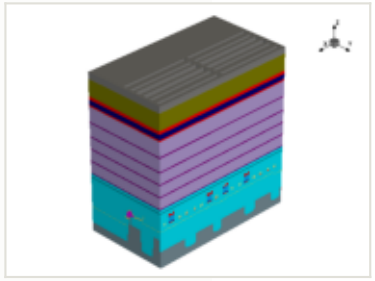

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

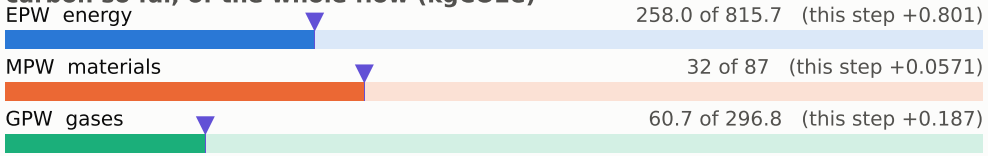

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

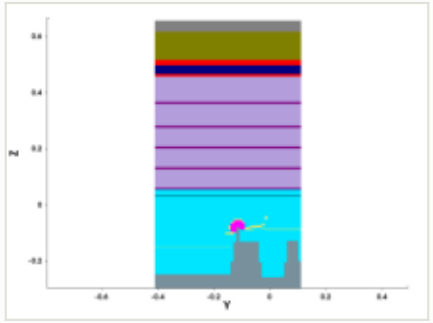

y cut at -0.150 µm

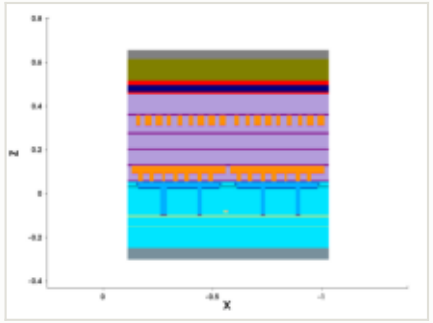

mask for this step

no mask for this step

steps by process area

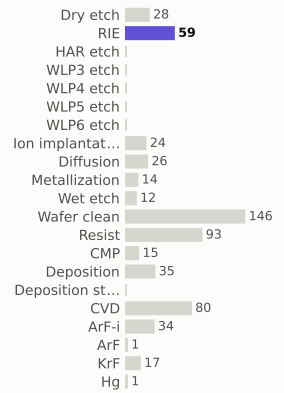

materials deposited (g)

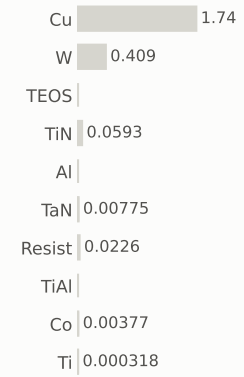

gases emitted (g)

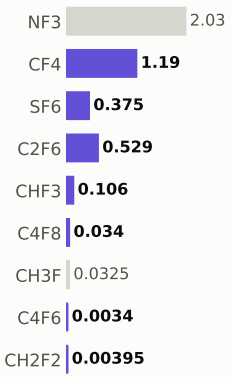

Step #7710: Spx_only

etch_strip · Spx_only

0	350.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

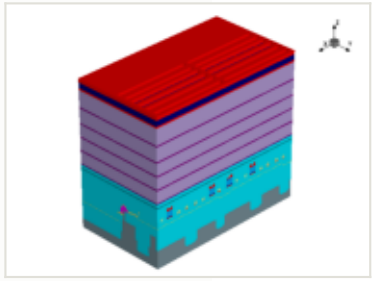

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

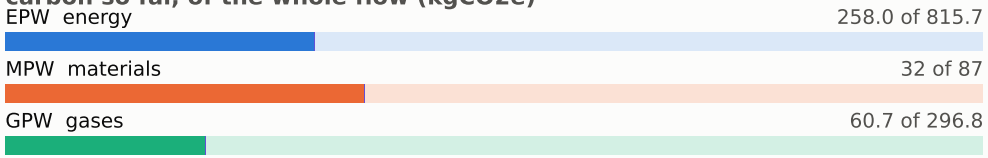

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

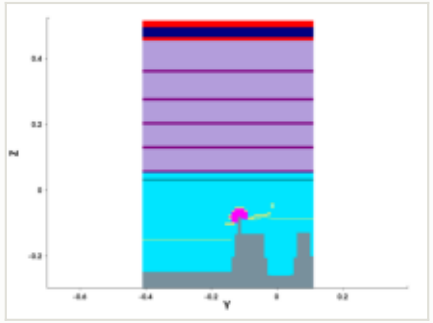

y cut at -0.150 µm

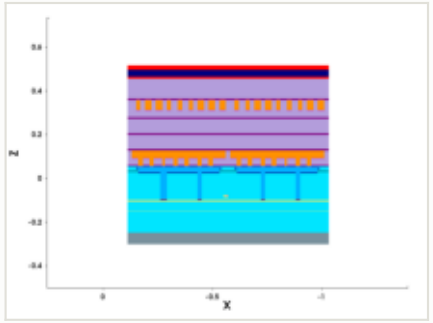

mask for this step

no mask for this step

steps by process area

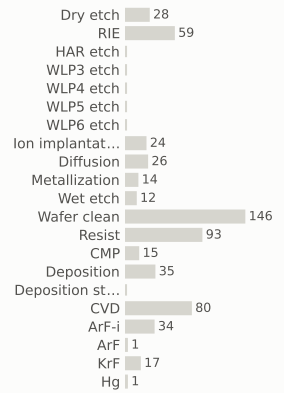

materials deposited (g)

gases emitted (g)

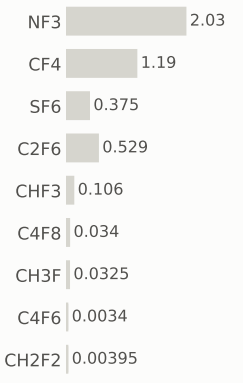

Step #7720: Wafer_clean

clean · Wafer_clean

0.169	350.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

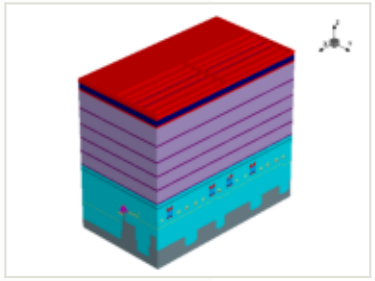

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

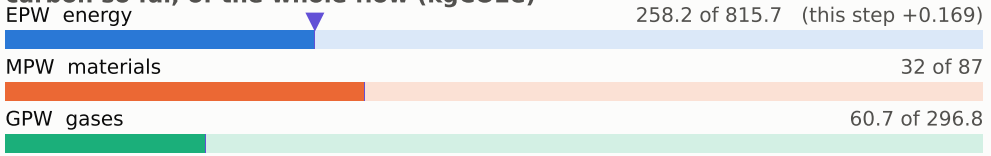

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

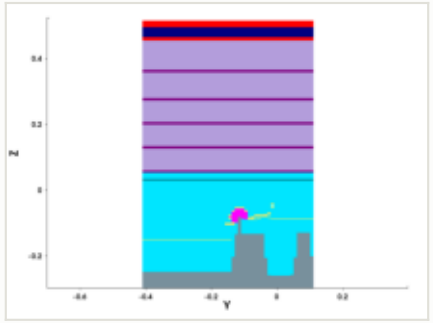

y cut at -0.150 µm

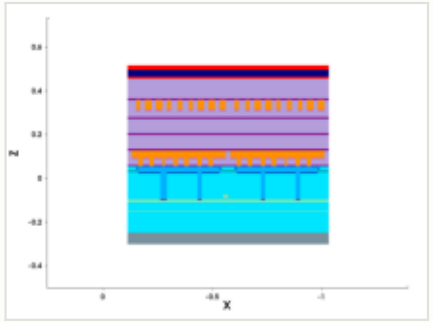

mask for this step

no mask for this step

steps by process area

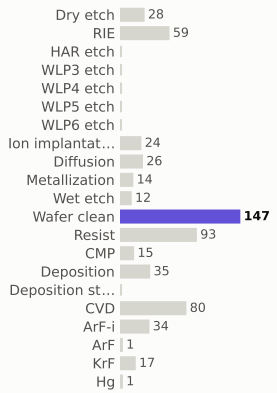

materials deposited (g)

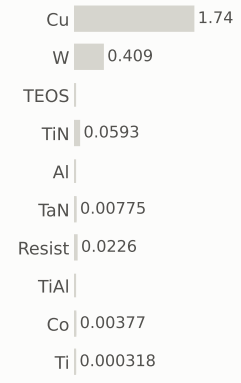

gases emitted (g)

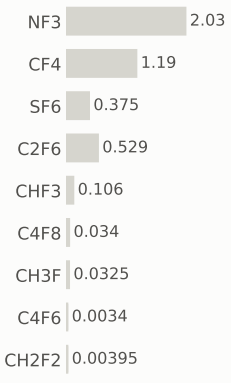

Step #7730: Metallization

depo_ellipsoidal · Metallization

1.2	352.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

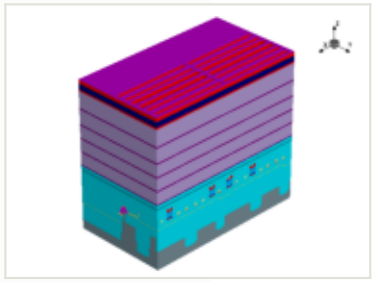

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

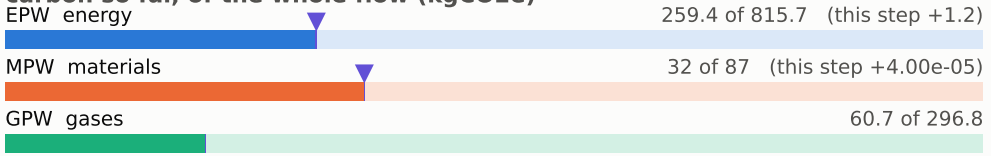

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

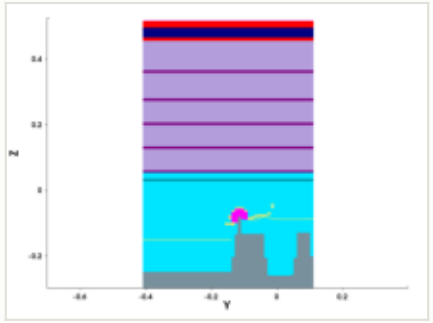

y cut at -0.150 µm

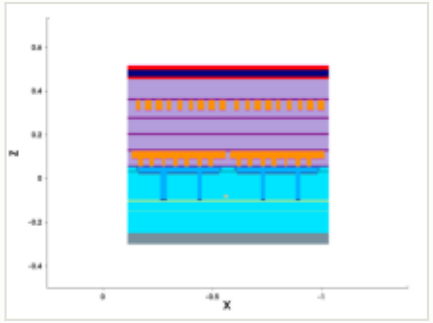

mask for this step

no mask for this step

steps by process area

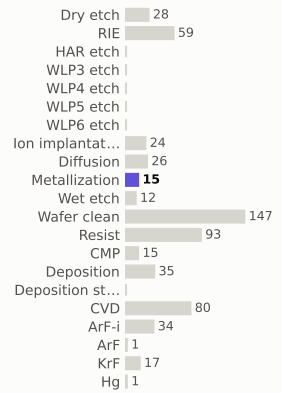

materials deposited (g)

gases emitted (g)



Step #7740: Metallization

depo_fill · Metallization

1.21	353.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

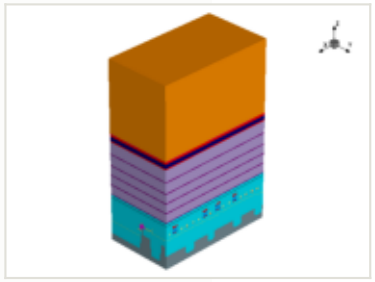

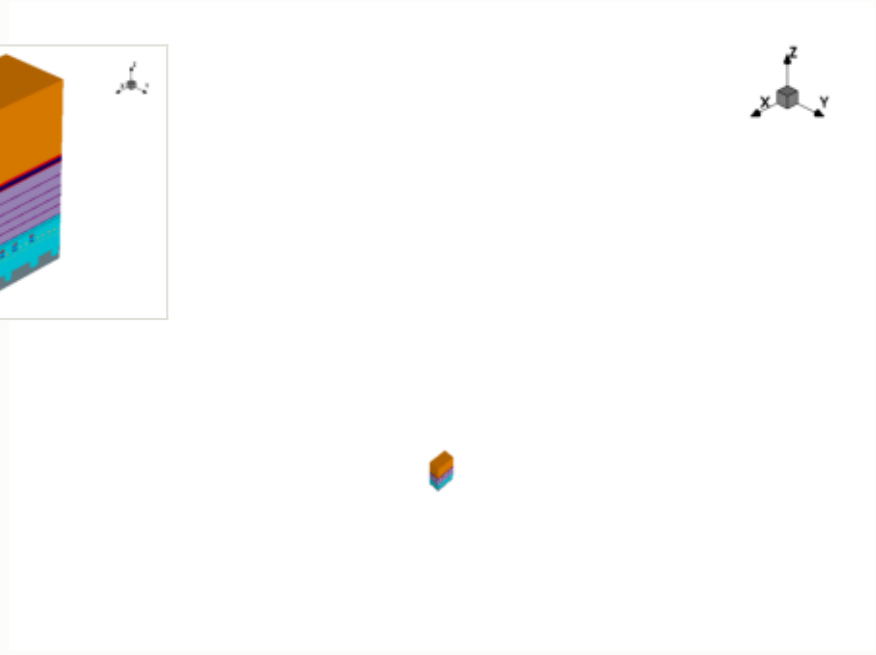

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

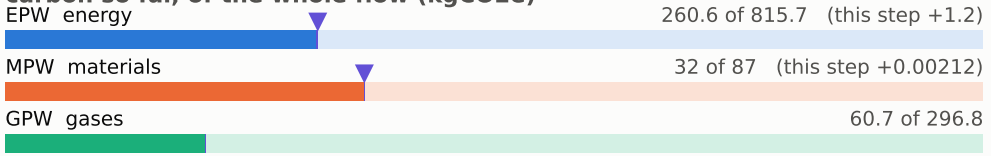

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

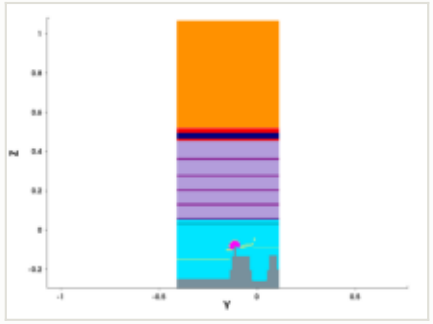

y cut at -0.150 µm

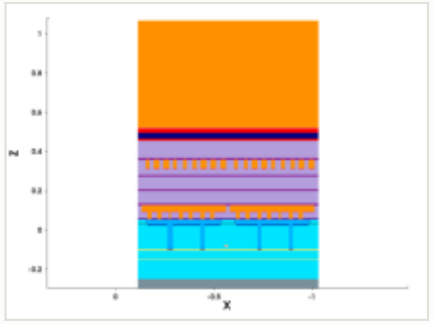

mask for this step

no mask for this step

steps by process area

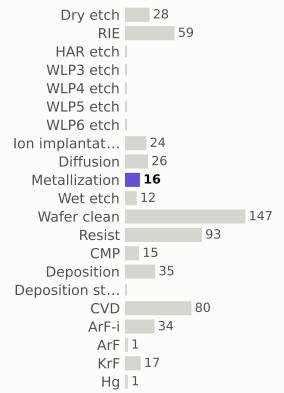

materials deposited (g)

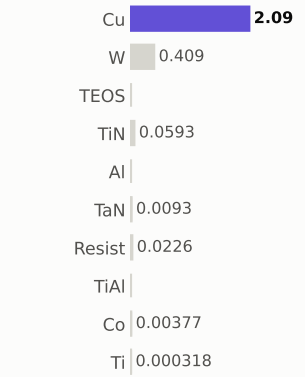

gases emitted (g)

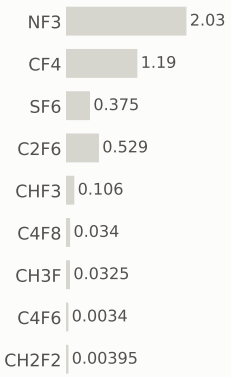

Step #7750: Diffusion

anneal · Diffusion

0.801	354.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

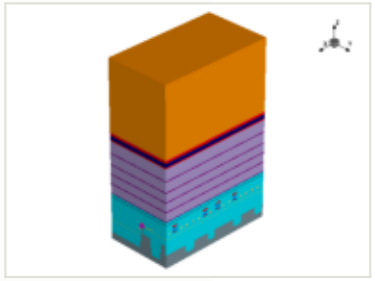

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

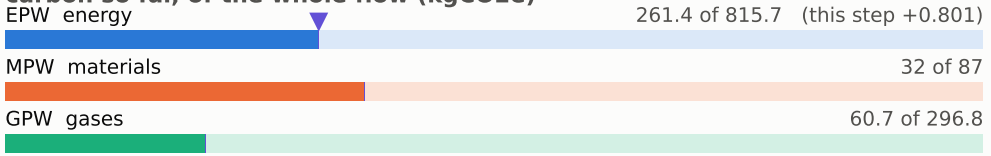

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

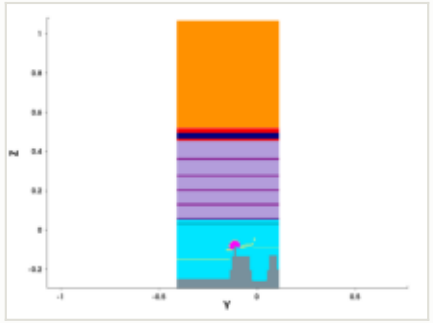

y cut at -0.150 µm

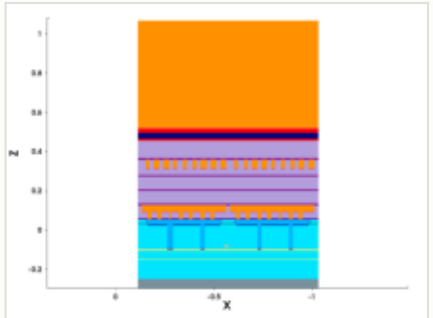

mask for this step

no mask for this step

steps by process area

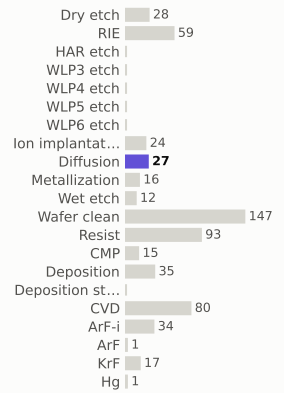

materials deposited (g)

gases emitted (g)

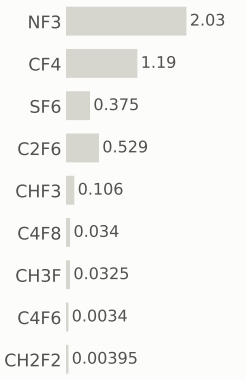

Step #7760: CMP

etch_cmp · CMP

0.169	354.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

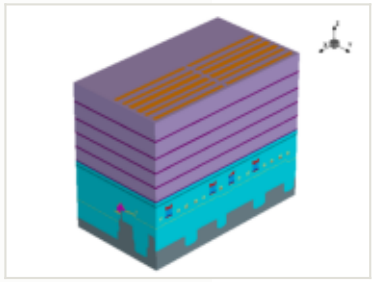

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

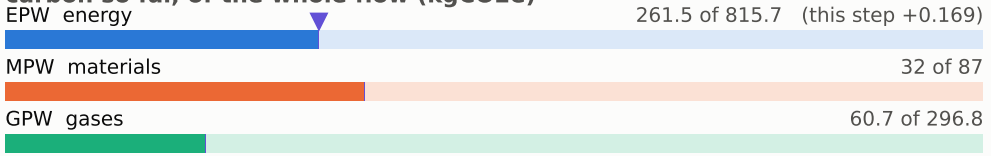

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

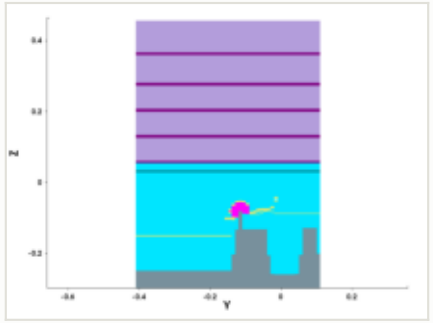

y cut at -0.150 µm

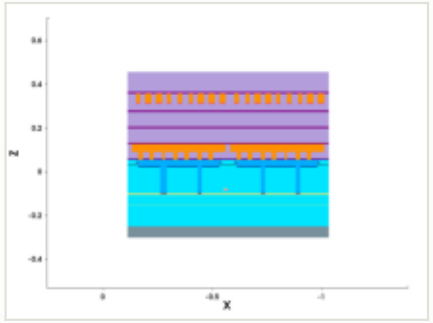

mask for this step

no mask for this step

steps by process area

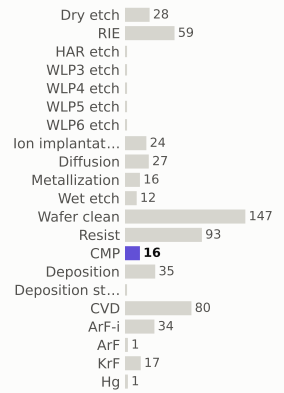

materials deposited (g)



gases emitted (g)

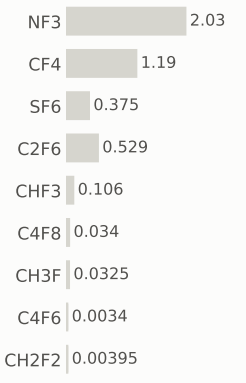

Step #7770: Spx_only

depo_isotropic · Spx_only

4.20e-05	354.2	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

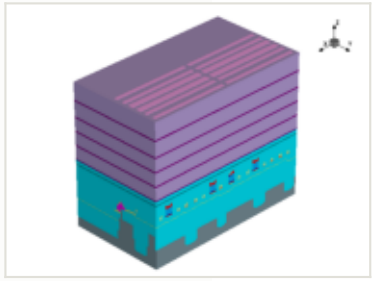

this step

process area	Spx_only	EPW	0 kgCO2e
material	Co	EPW tool	0 kgCO2e
thickness	0.0015 µm	EPW overhead	0 kgCO2e
material GWP	44.5 gCO2e/g	MPW	4.20e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**4.20e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

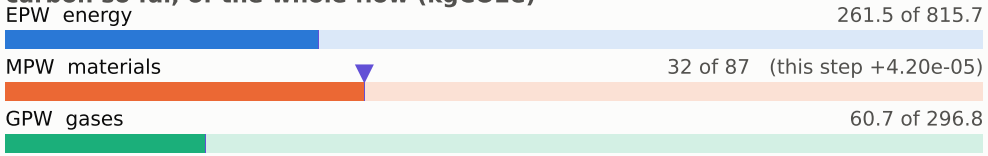

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

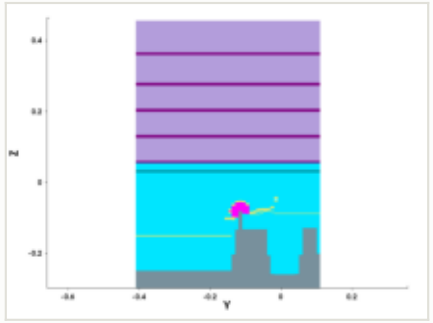

y cut at -0.150 µm

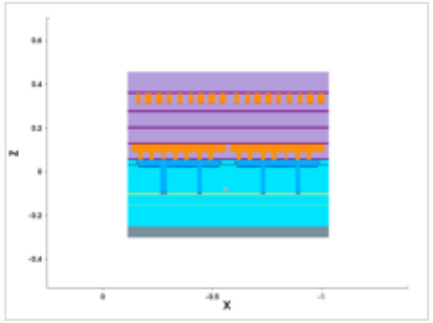

mask for this step

no mask for this step

steps by process area

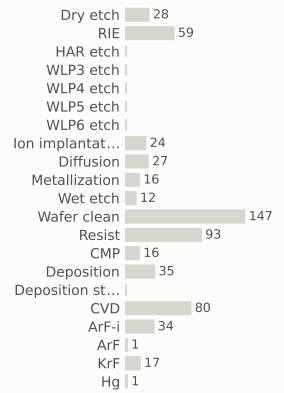

materials deposited (g)

gases emitted (g)

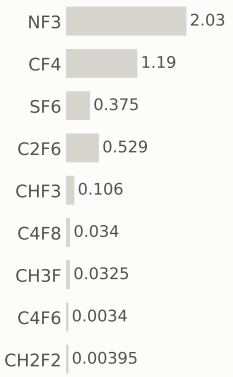

Step #7790: CVD

depo_isotropic · CVD

1.31	355.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

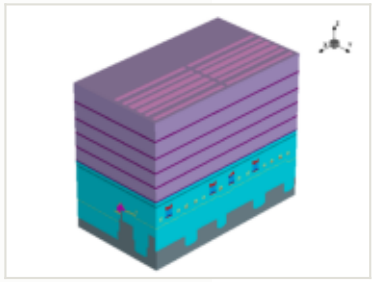

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

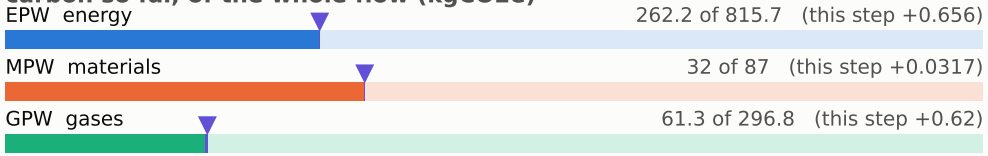

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

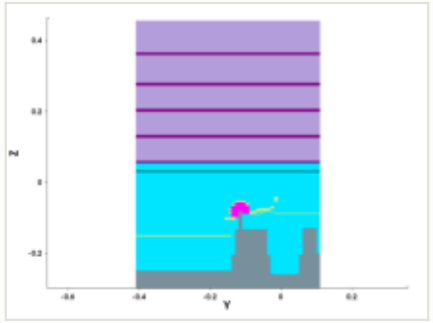

y cut at -0.150 µm

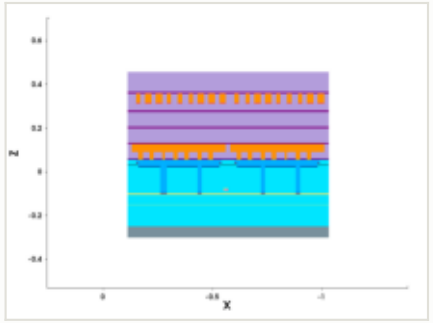

mask for this step

no mask for this step

steps by process area

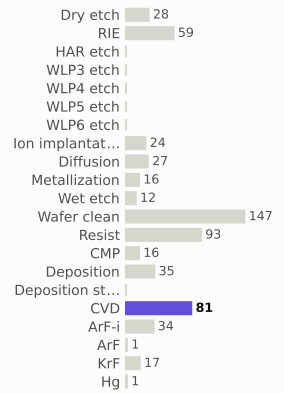

materials deposited (g)

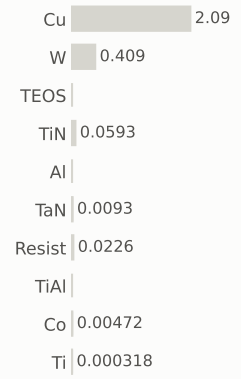

gases emitted (g)

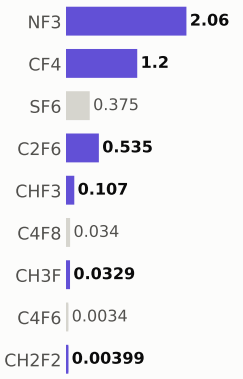

Step #7800: Spx_only

depo_fill · Spx_only

0	355.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

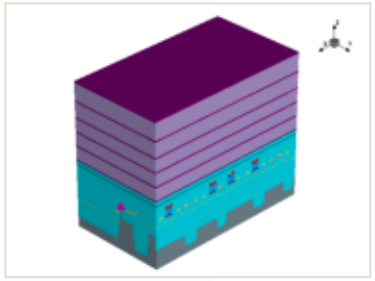

this step

process area	Spx_only
material	—
thickness	0.006 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

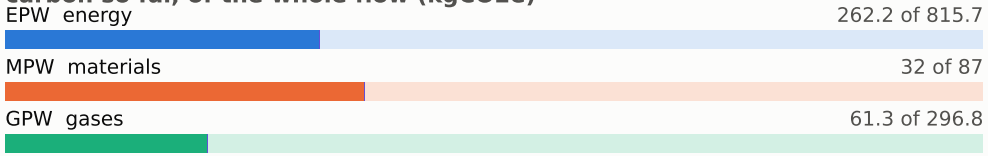

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

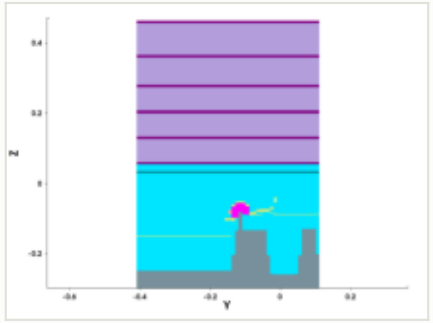

y cut at -0.150 µm

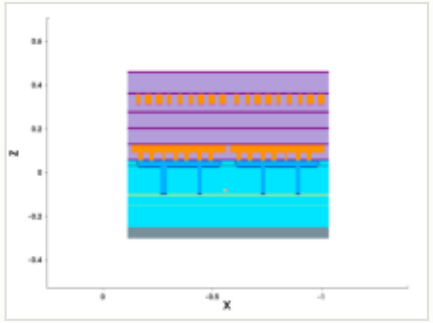

mask for this step

no mask for this step

steps by process area

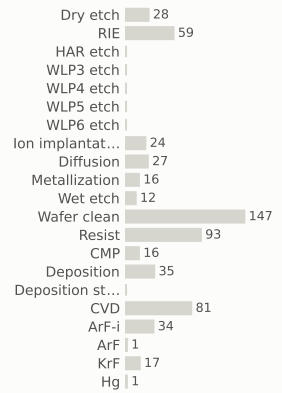

materials deposited (g)

gases emitted (g)

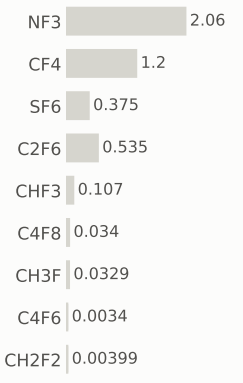

Step #7810: CVD

depo_fill · CVD

1.31	356.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

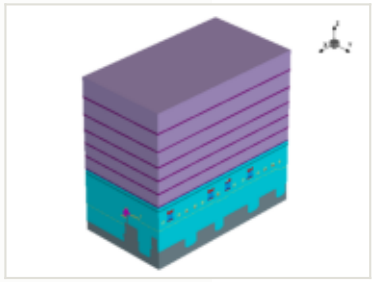

this step

process area	CVD
material	—
thickness	0.106 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

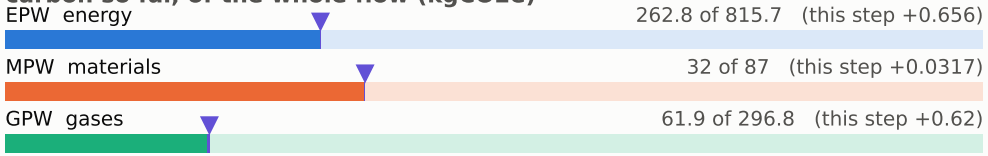

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

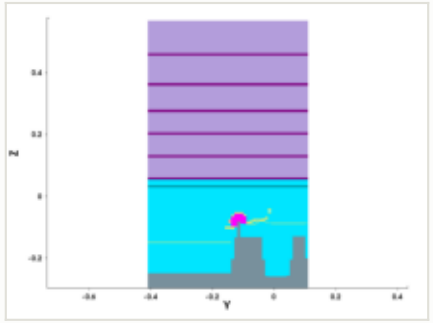

y cut at -0.150 µm

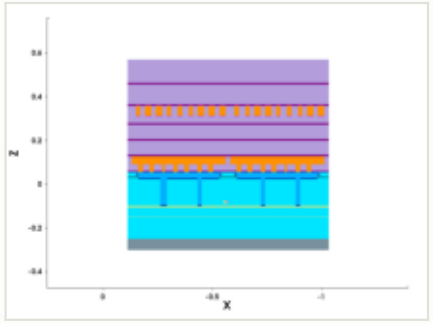

mask for this step

no mask for this step

steps by process area

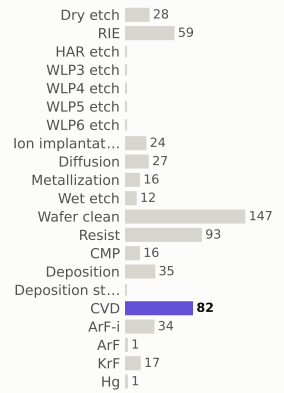

materials deposited (g)



gases emitted (g)

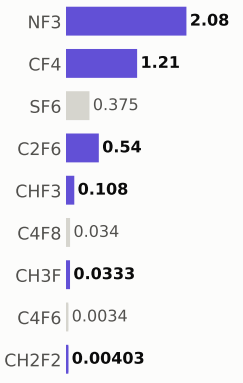

Step #7820: Diffusion

anneal · Diffusion

0.801	357.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

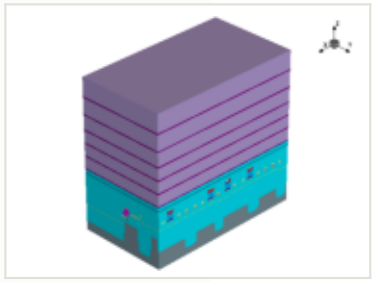

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

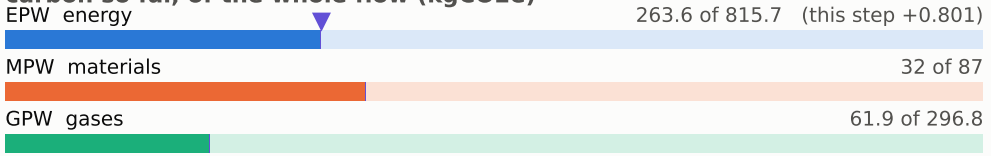

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

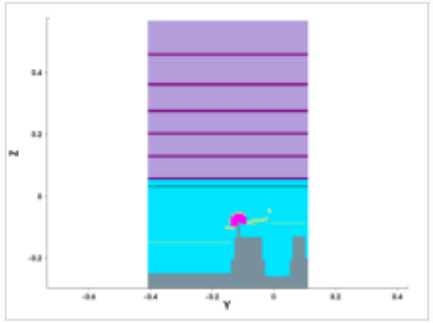

y cut at -0.150 µm

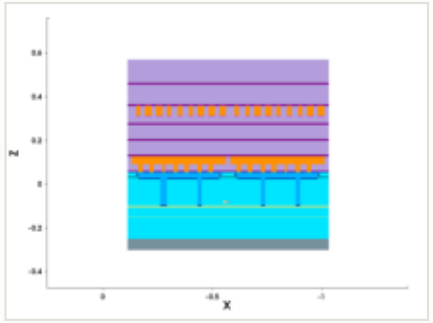

mask for this step

no mask for this step

steps by process area

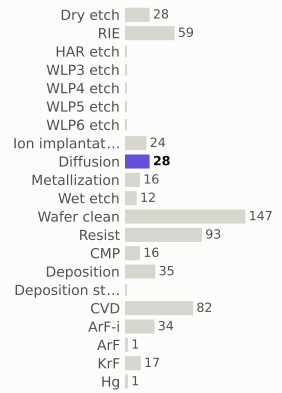

materials deposited (g)

gases emitted (g)

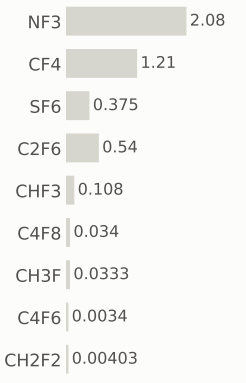

Step #7830: Wafer_clean

clean · Wafer_clean

0.169	357.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

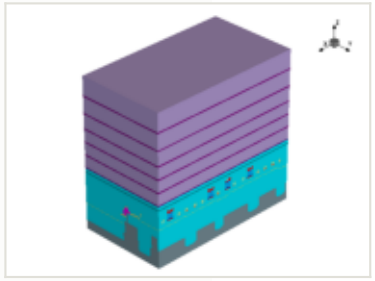

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

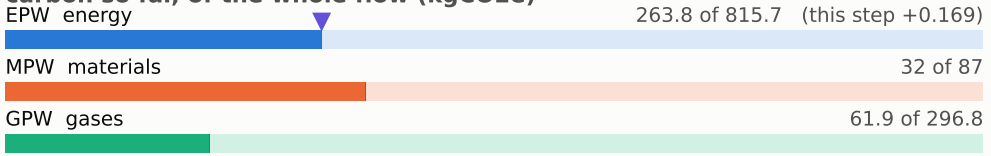

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

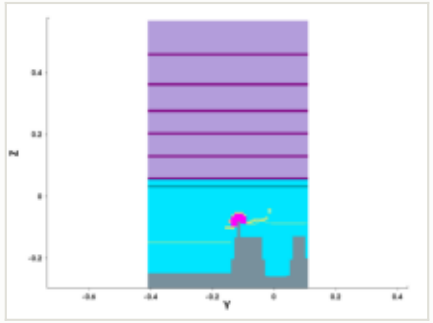

y cut at -0.150 µm

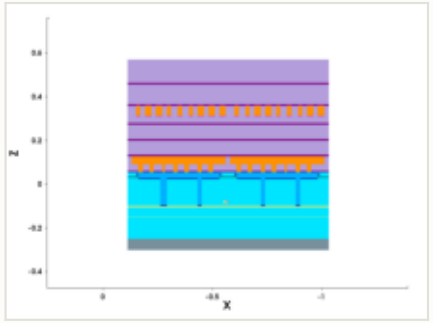

mask for this step

no mask for this step

steps by process area

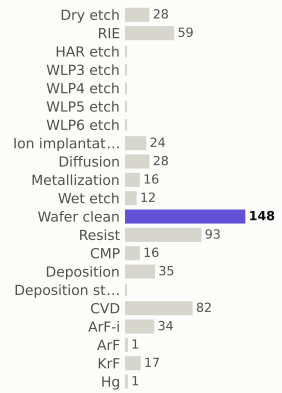

materials deposited (g)

gases emitted (g)

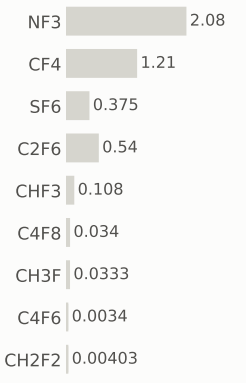

Step #7840: CVD

depo_fill · CVD

1.31	359.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

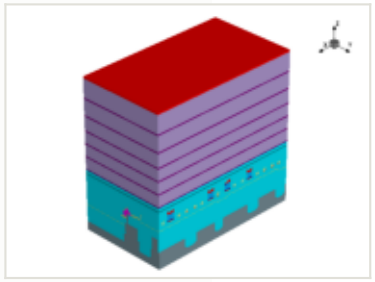

this step

process area	CVD
material	—
thickness	0.01 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

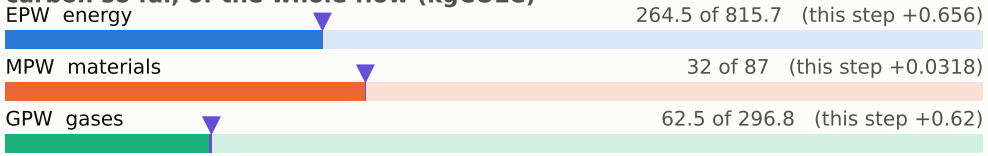

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

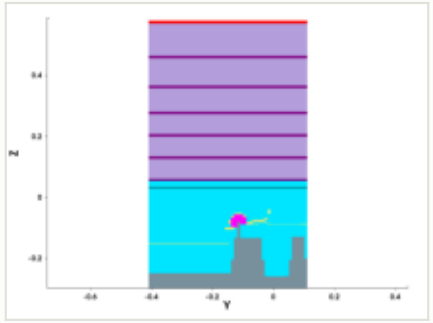

y cut at -0.150 µm

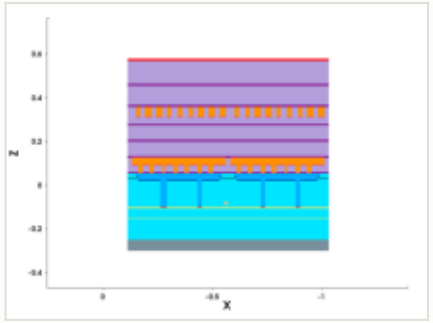

mask for this step

no mask for this step

steps by process area

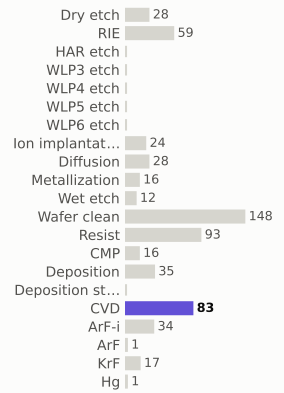

materials deposited (g)

gases emitted (g)

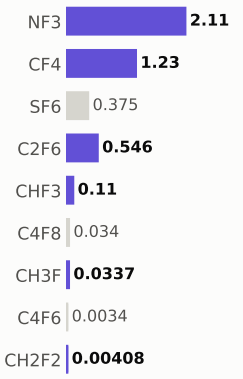

Step #7850: Spx_only

depo_fill · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

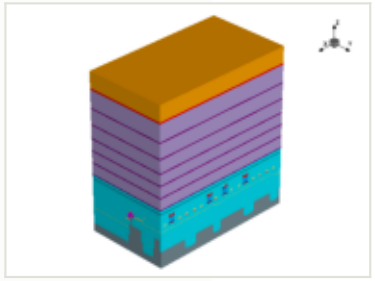

this step

process area	Spx_only
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

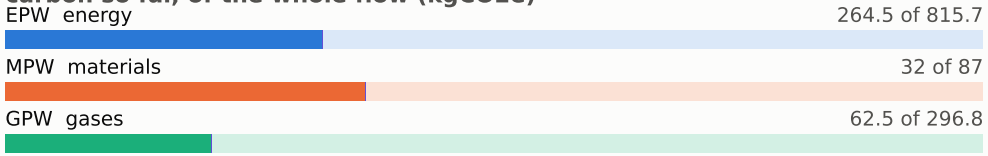

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

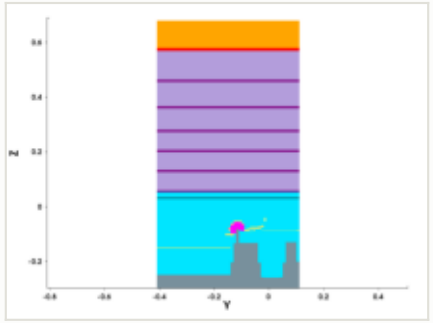

y cut at -0.150 µm

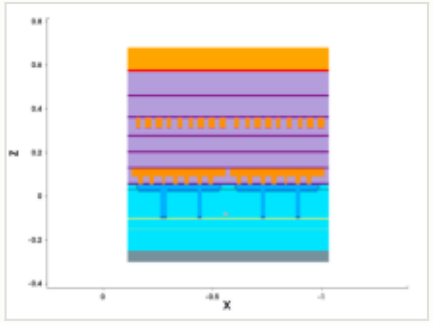

mask for this step

no mask for this step

steps by process area

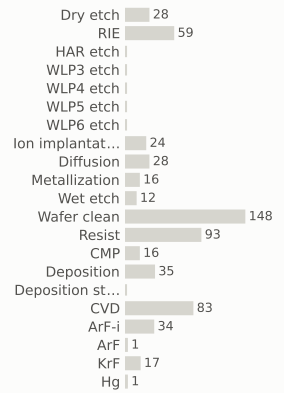

materials deposited (g)

gases emitted (g)

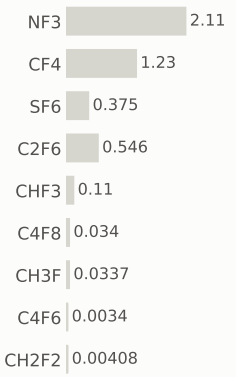

Step #7860: Spx_only

depo_fill · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

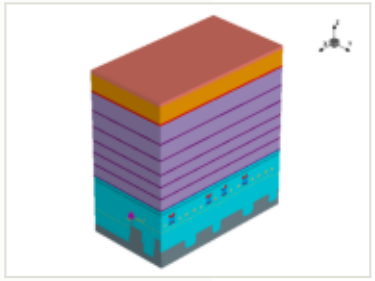

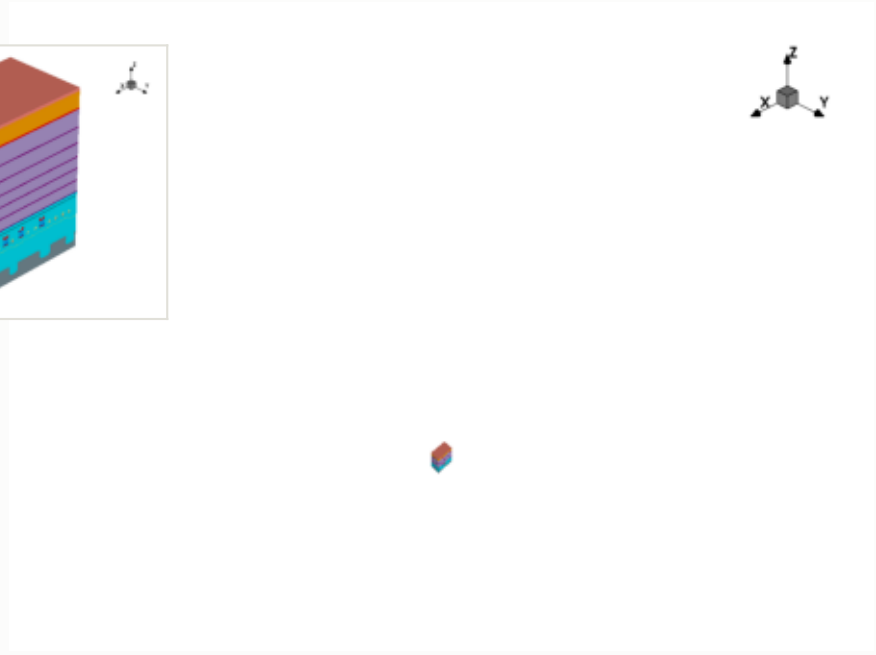

this step

process area	Spx_only
material	—
thickness	0.02 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

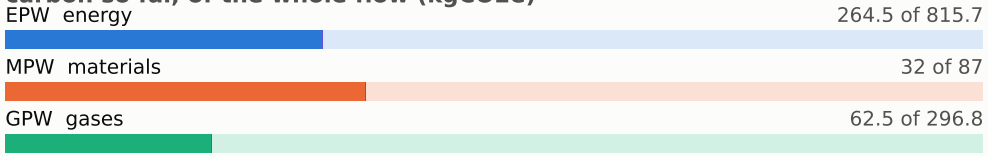

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

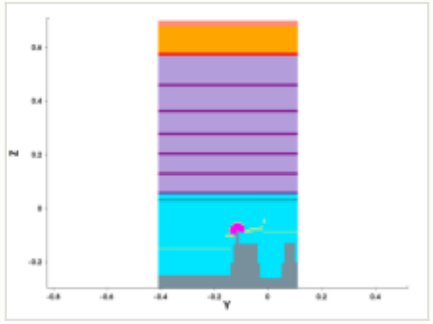

y cut at -0.150 µm

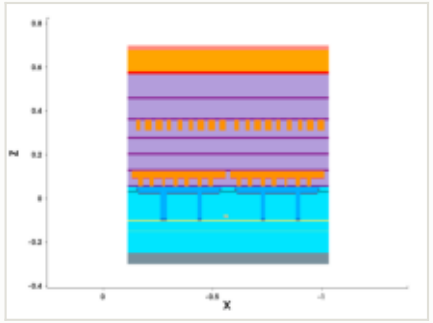

mask for this step

no mask for this step

steps by process area

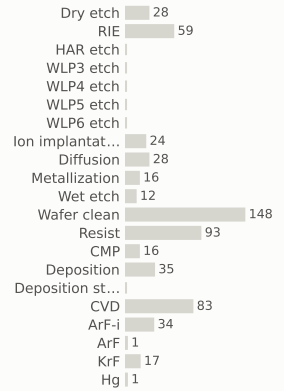

materials deposited (g)

gases emitted (g)

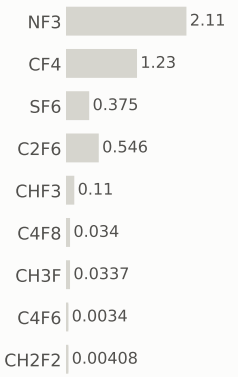

Step #7870: Spx_only

litho_patterning · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

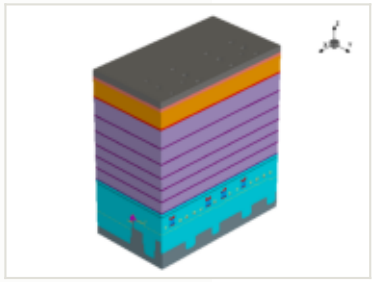

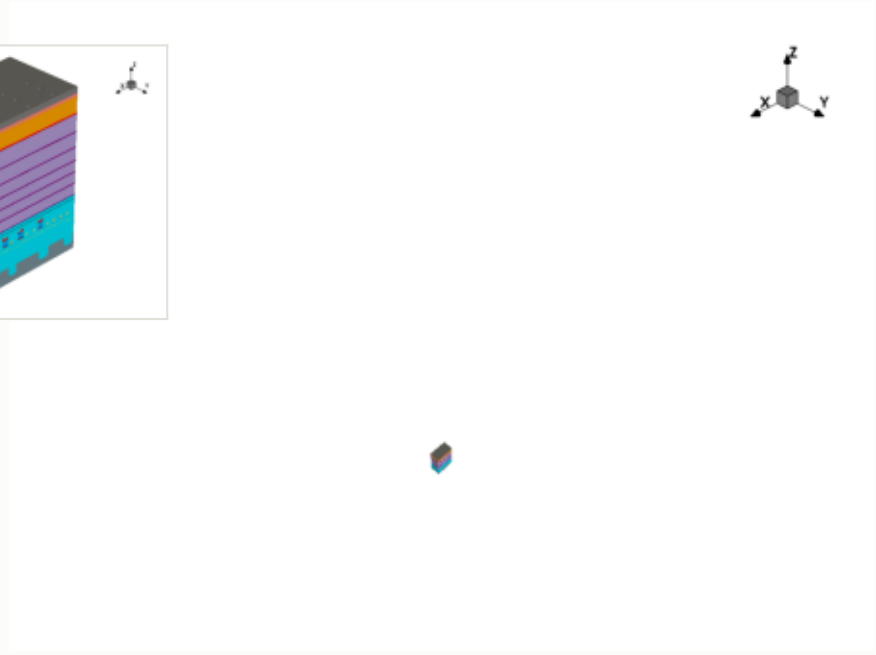

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

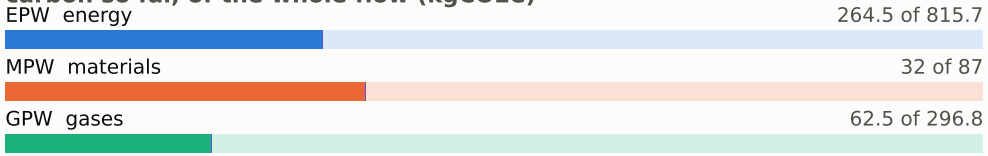

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

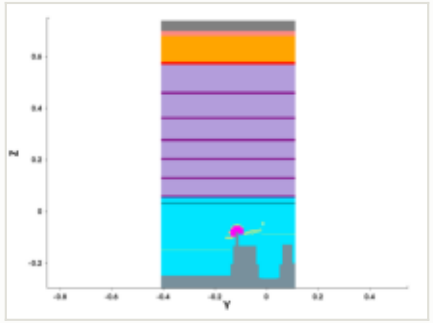

y cut at -0.150 µm

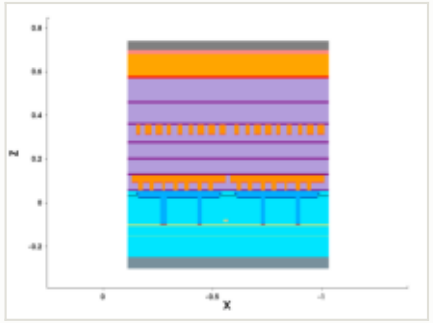

mask: layer 12551:0 (GDSII)



steps by process area

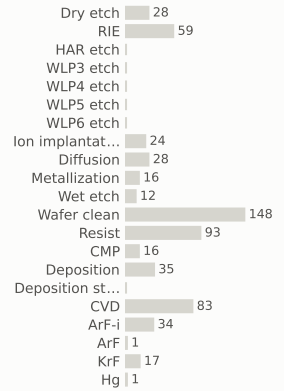

materials deposited (g)

gases emitted (g)

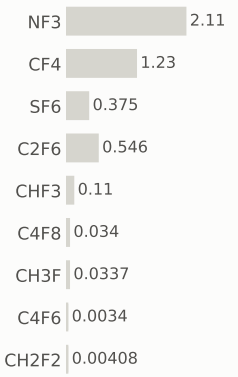

Step #7880: Spx_only

etch_anisotropic · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

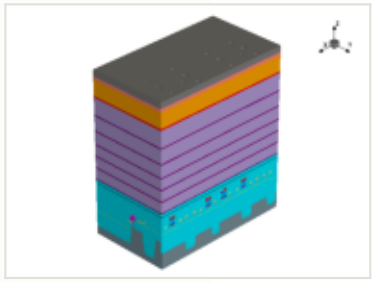

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

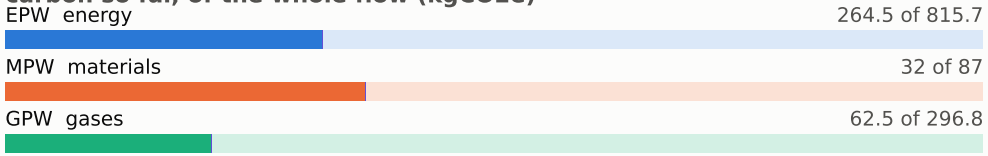

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

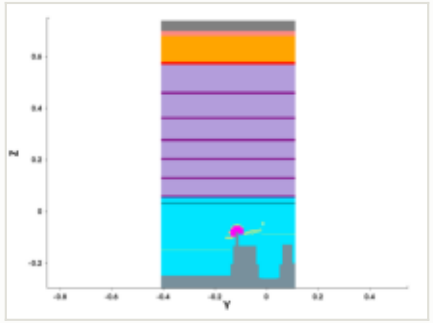

y cut at -0.150 µm

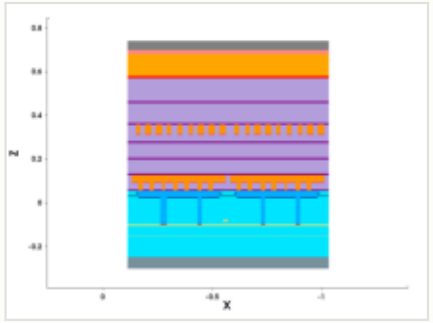

mask for this step

no mask for this step

steps by process area

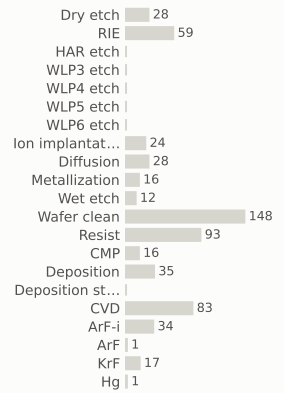

materials deposited (g)

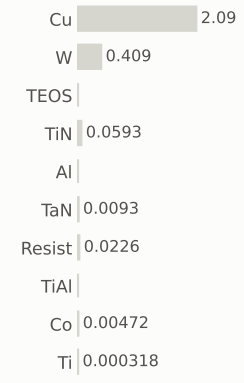

gases emitted (g)

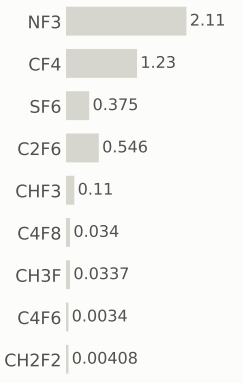

Step #7890: Spx_only

etch_strip · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

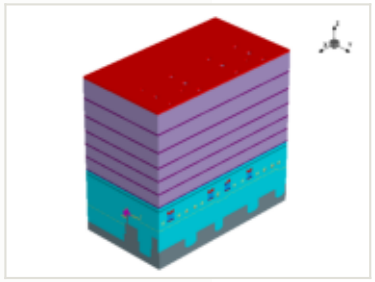

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

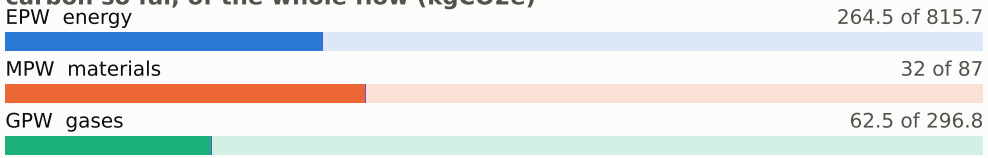

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

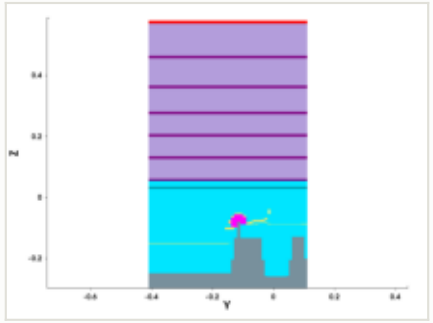

y cut at -0.150 µm

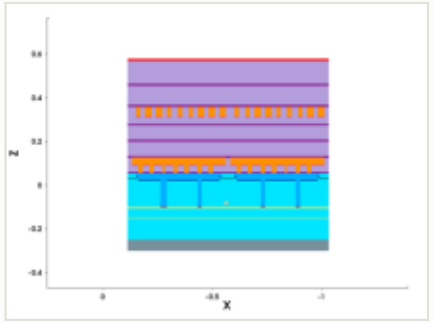

mask for this step

no mask for this step

steps by process area

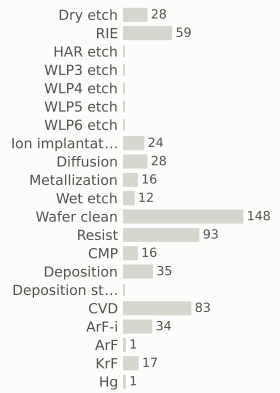

materials deposited (g)

gases emitted (g)

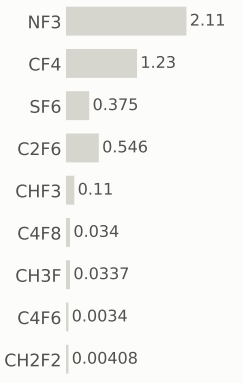

Step #7900: Spx_only

depo_fill · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

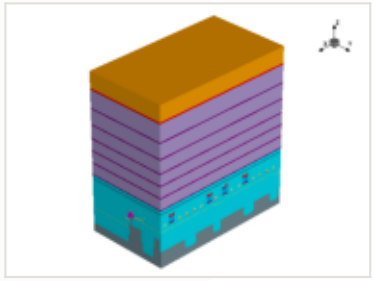

this step

process area	Spx_only
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

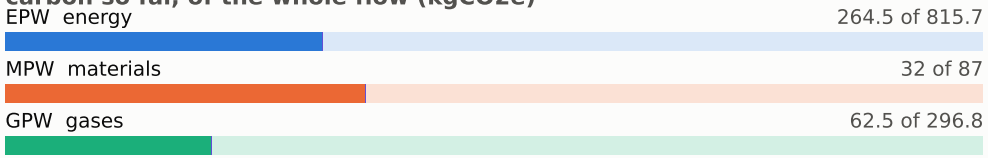

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

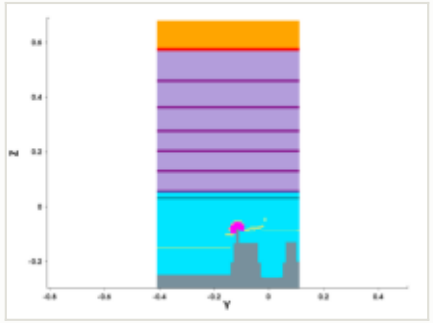

y cut at -0.150 µm

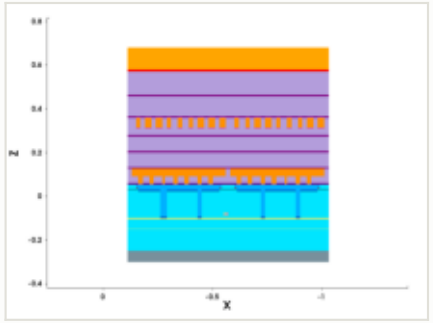

mask for this step

no mask for this step

steps by process area

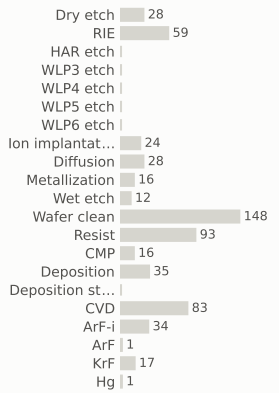

materials deposited (g)

gases emitted (g)

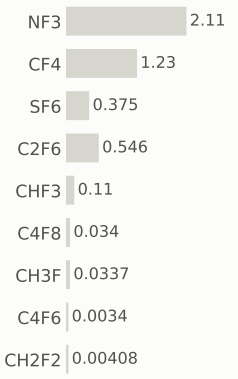

Step #7910: Spx_only

depo_fill · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

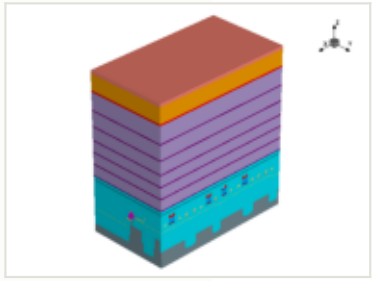

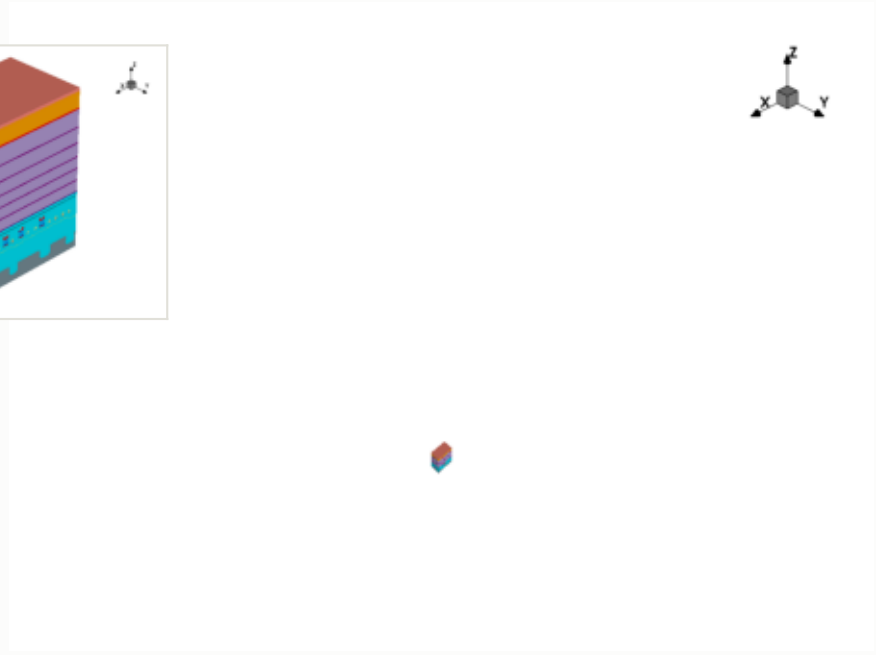

this step

process area	Spx_only
material	—
thickness	0.02 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

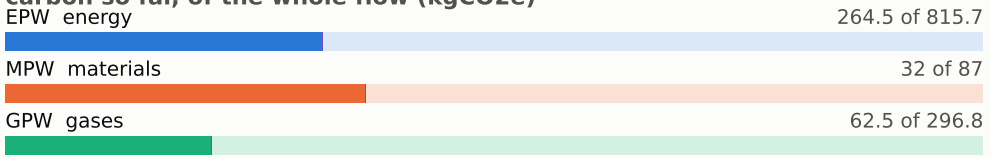

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

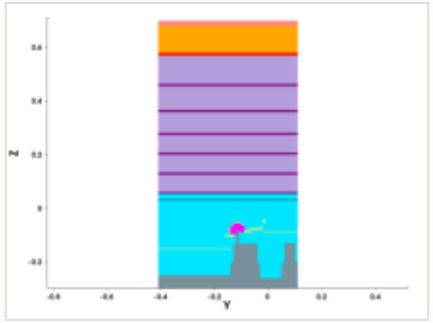

y cut at -0.150 µm

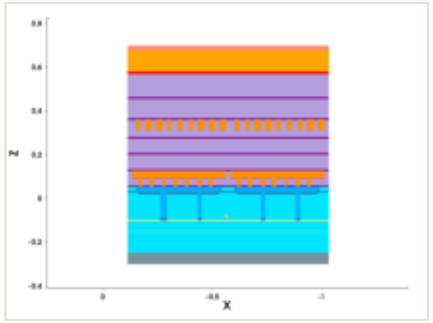

mask for this step

no mask for this step

steps by process area

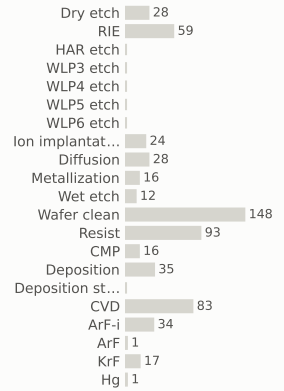

materials deposited (g)

gases emitted (g)

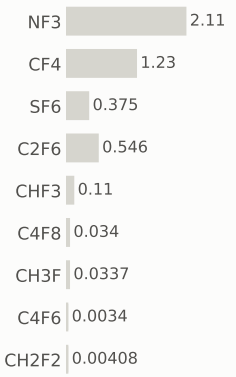

Step #7920: Spx_only

litho_patterning · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

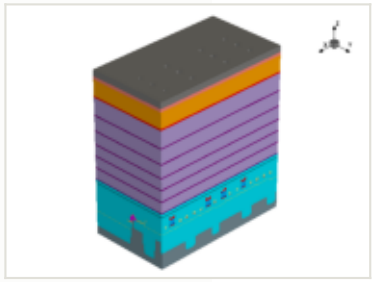

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

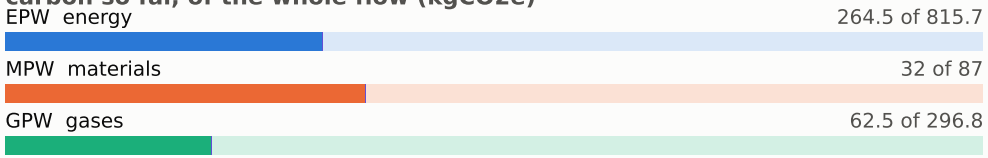

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

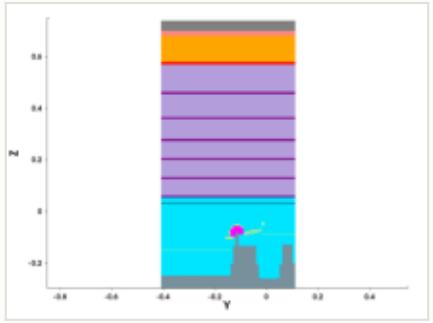

y cut at -0.150 µm

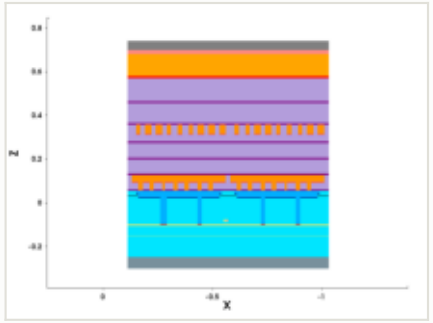

mask: layer 12552:0 (GDSII)



steps by process area

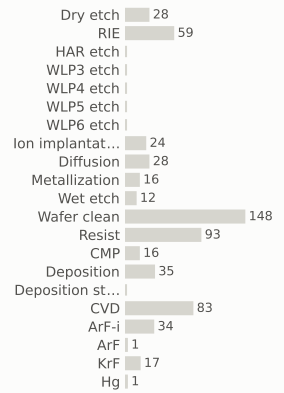

materials deposited (g)

gases emitted (g)

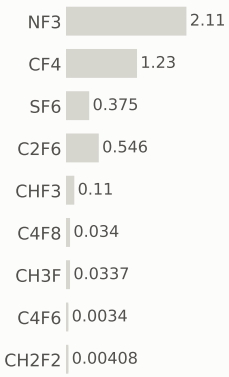

Step #7930: Spx_only

etch_anisotropic · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

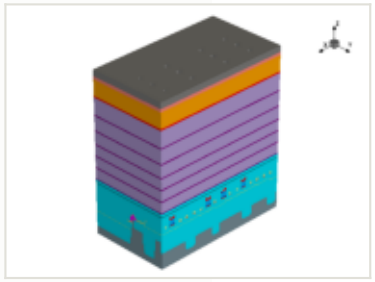

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

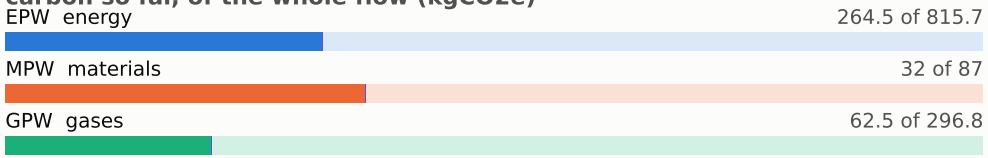

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

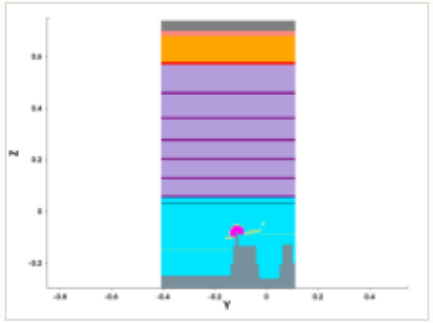

y cut at -0.150 µm

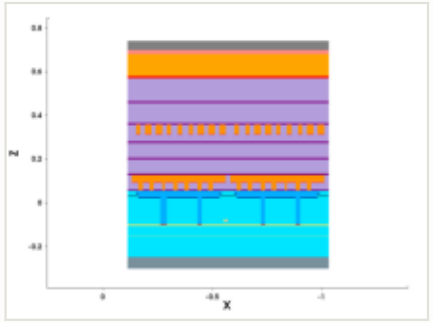

mask for this step

no mask for this step

steps by process area

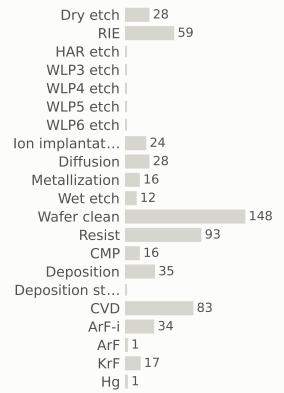

materials deposited (g)

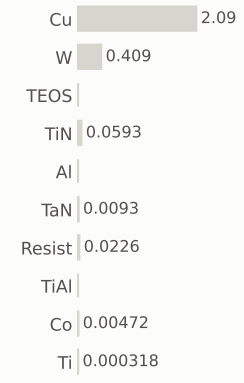

gases emitted (g)

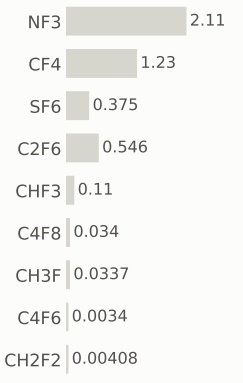

Step #7940: Spx_only

etch_strip · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

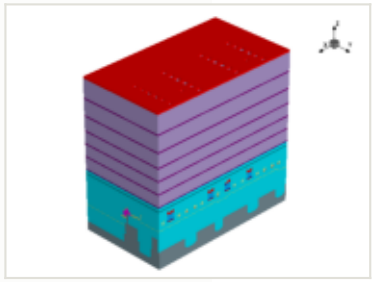

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

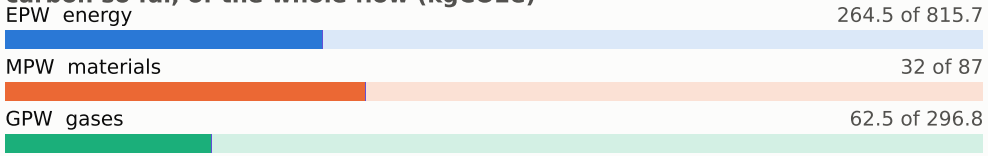

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

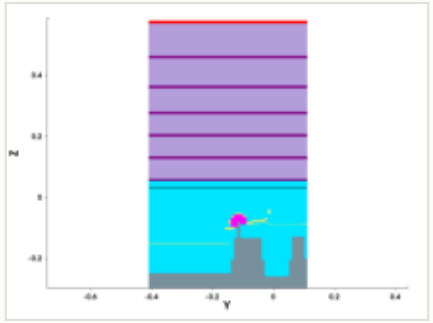

y cut at -0.150 µm

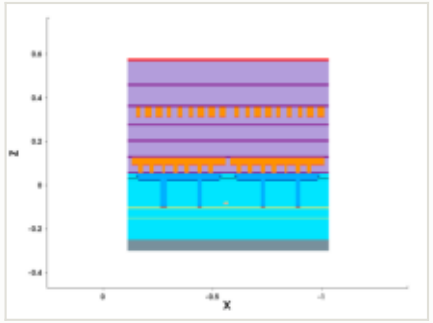

mask for this step

no mask for this step

steps by process area

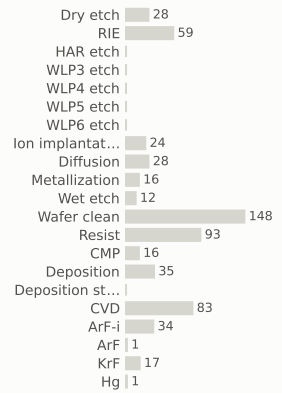

materials deposited (g)

gases emitted (g)

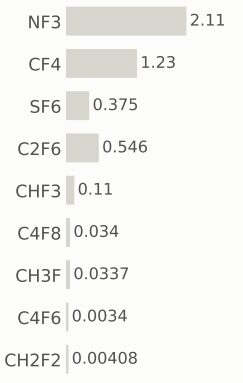

Step #7950: Spx_only

depo_ellipsoidal · Spx_only

4.00e-05	359.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

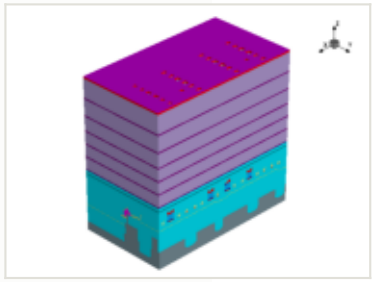

this step

process area	Spx_only
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**4.00e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

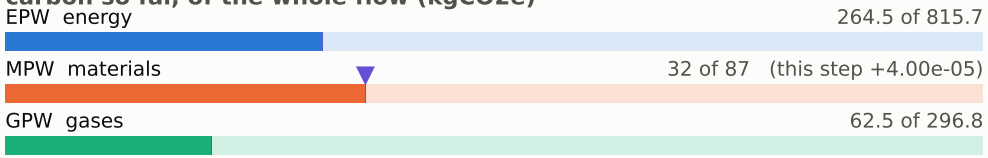

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

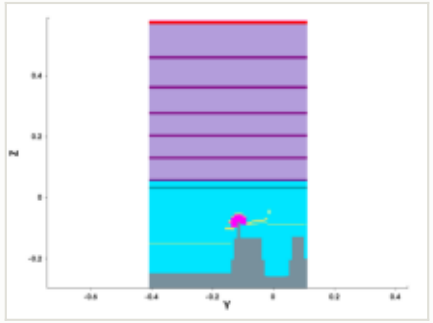

y cut at -0.150 µm

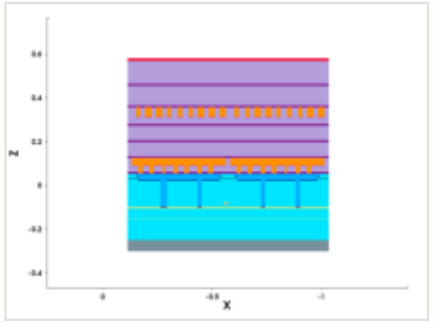

mask for this step

no mask for this step

steps by process area

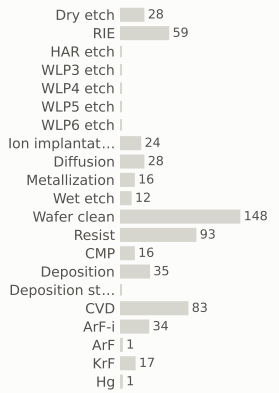

materials deposited (g)

gases emitted (g)

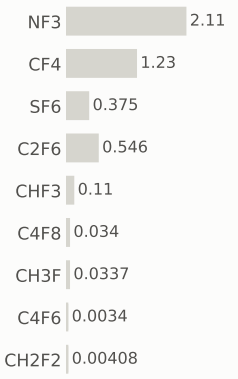

Step #7960: Spx_only

depo_fill · Spx_only

0.00212	359.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

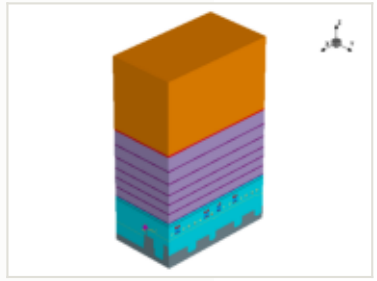

this step

process area	Spx_only
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.00212 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

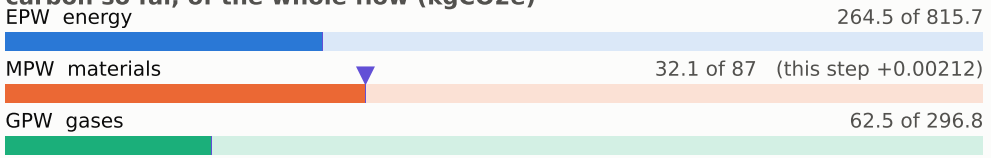

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

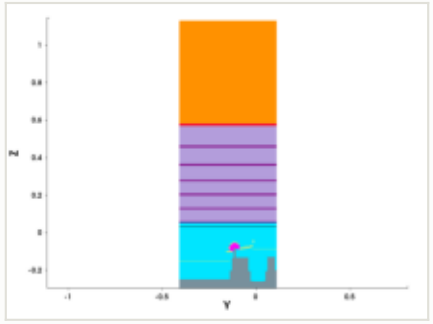

y cut at -0.150 µm

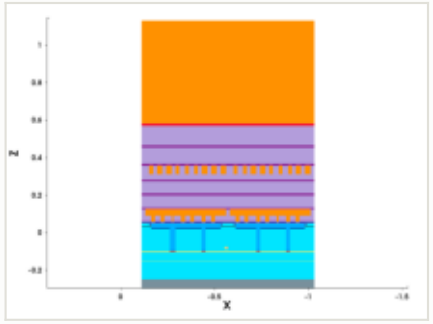

mask for this step

no mask for this step

steps by process area

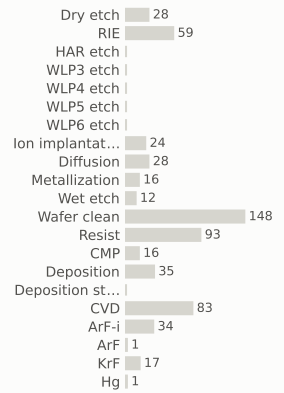

materials deposited (g)

gases emitted (g)

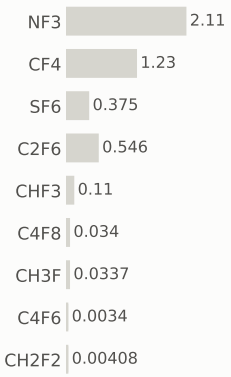

Step #7970: Spx_only

etch_cmp · Spx_only

0	359.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

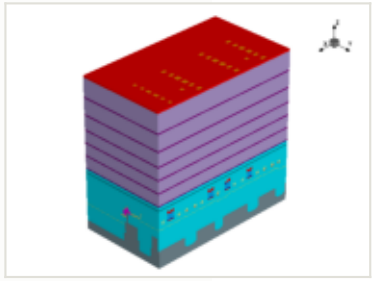

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

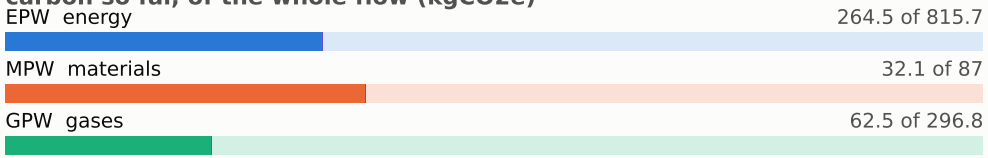

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

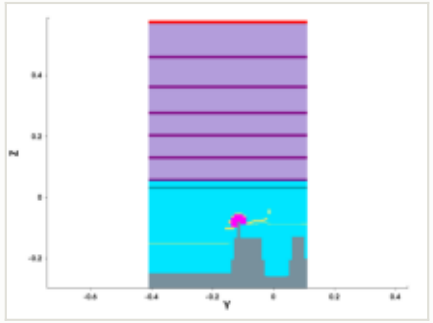

y cut at -0.150 µm

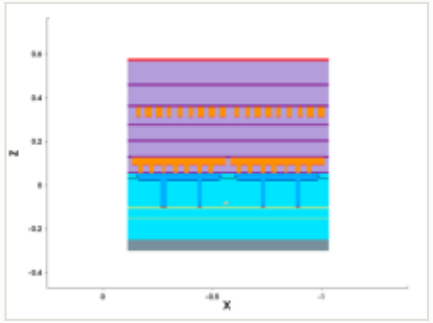

mask for this step

no mask for this step

steps by process area

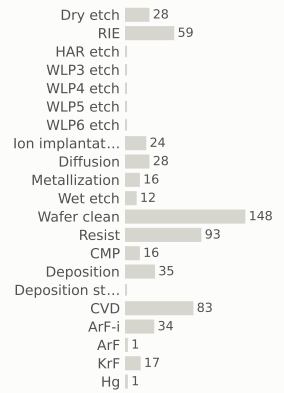

materials deposited (g)

gases emitted (g)

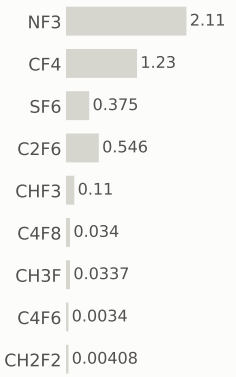

Step #7980: Deposition

depo_fill · Deposition

0.657	359.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

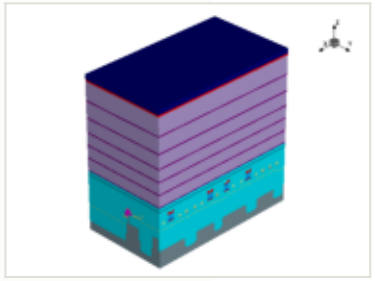

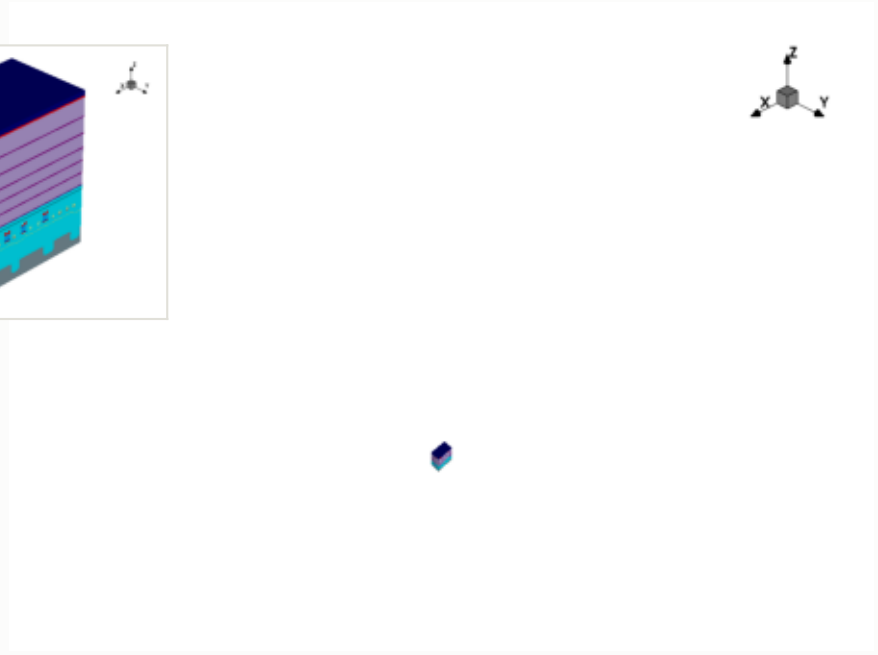

this step

process area	Deposition
material	TiN
thickness	0.03 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000486 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.657 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

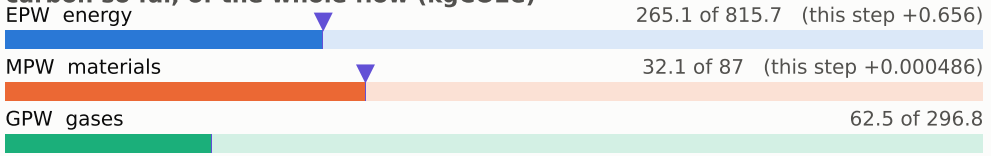

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

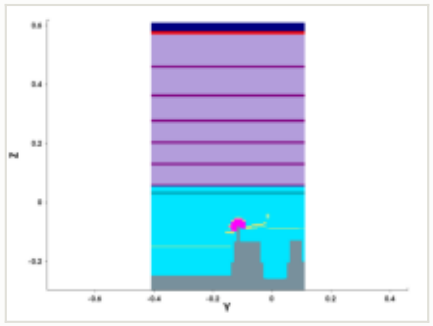

y cut at -0.150 µm

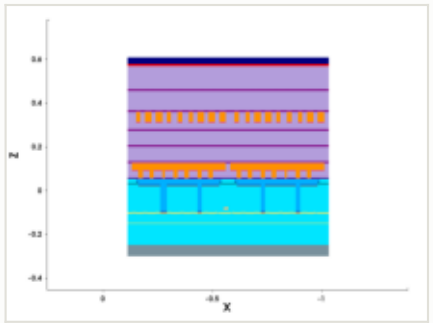

mask for this step

no mask for this step

steps by process area

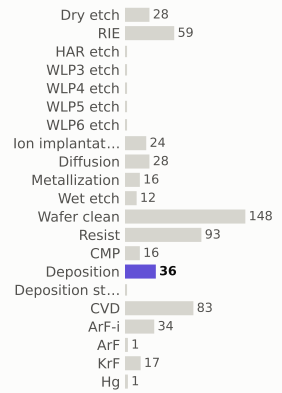

materials deposited (g)

gases emitted (g)

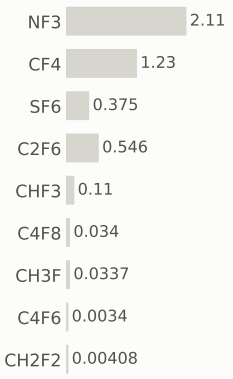

Step #7990: Wafer_clean

clean · Wafer_clean

0.169	359.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

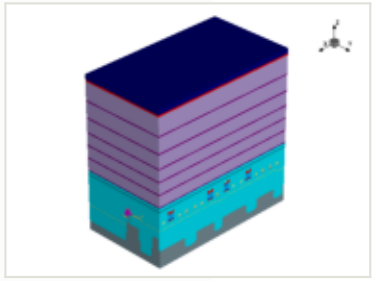

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

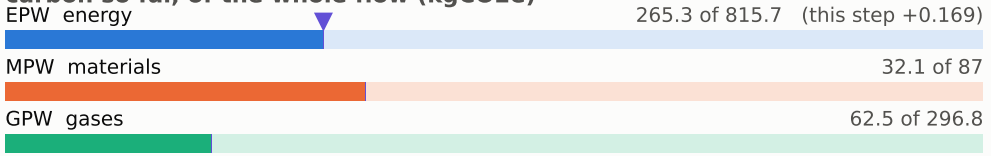

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

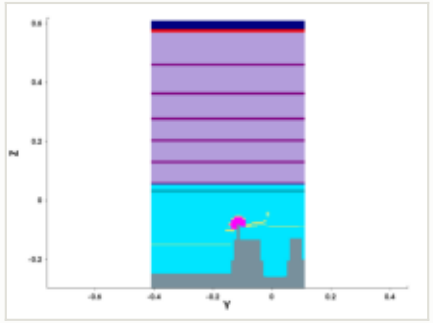

y cut at -0.150 µm

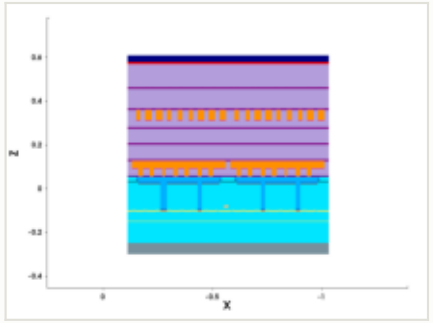

mask for this step

no mask for this step

steps by process area

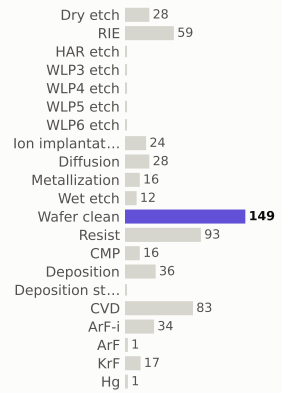

materials deposited (g)

gases emitted (g)

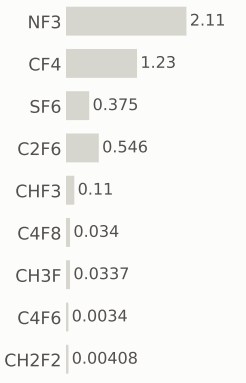

Step #8000: CVD

depo_fill · CVD

1.31	361.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

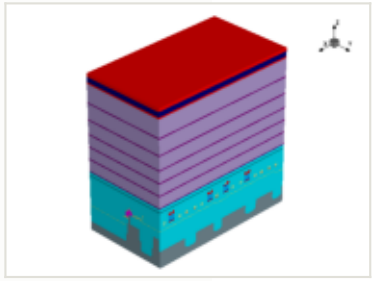

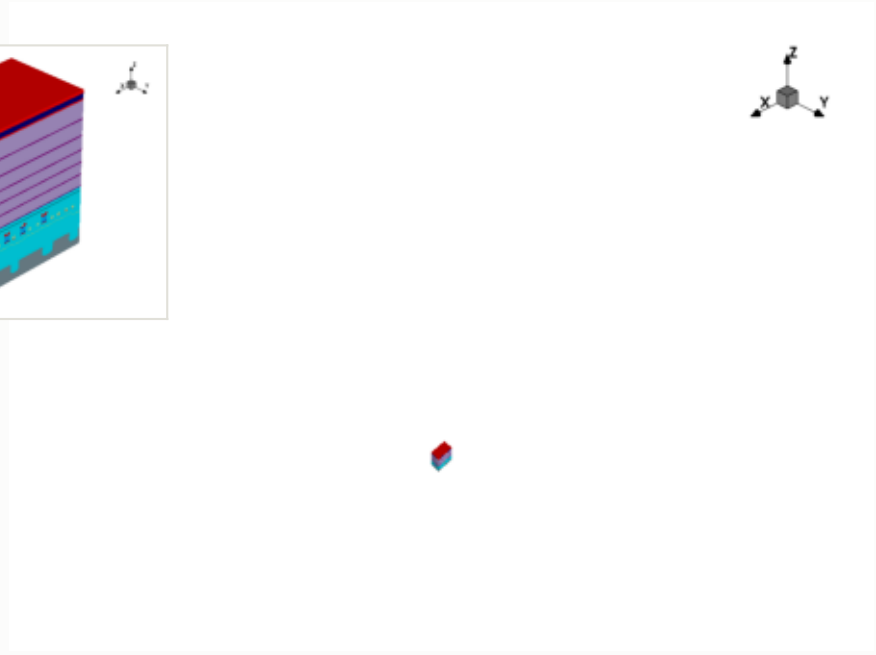

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

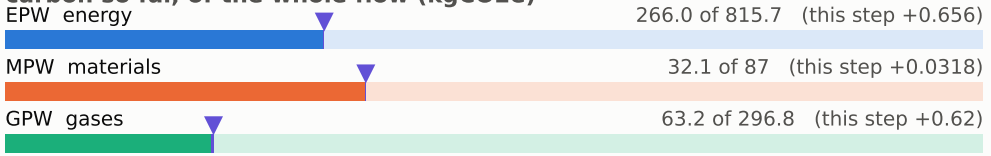

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

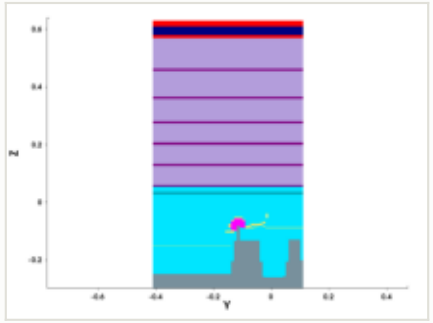

y cut at -0.150 µm

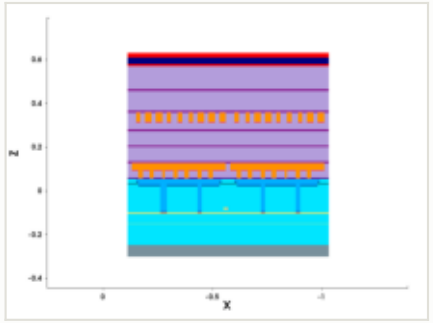

mask for this step

no mask for this step

steps by process area

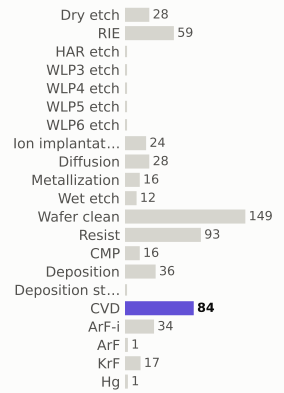

materials deposited (g)

gases emitted (g)

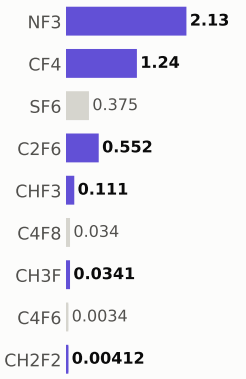

Step #8010: Spx_only

depo_fill · Spx_only

0	361.2	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

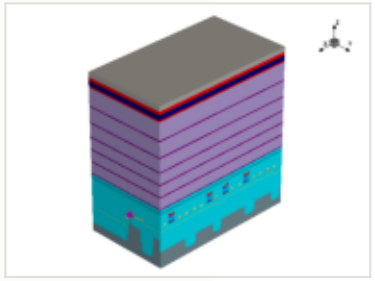

this step

process area	Spx_only
material	—
thickness	0.03 µm
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

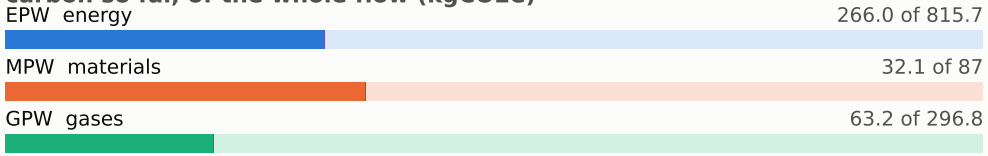

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

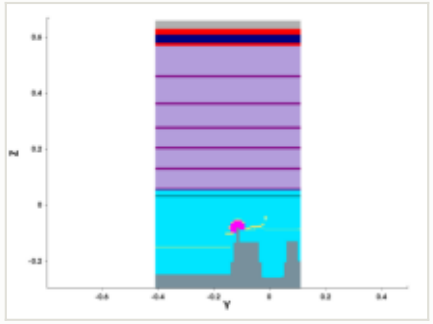

y cut at -0.150 µm

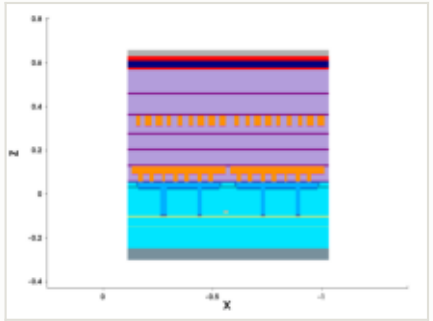

mask for this step

no mask for this step

steps by process area

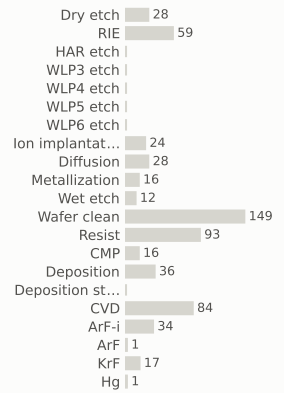

materials deposited (g)

gases emitted (g)

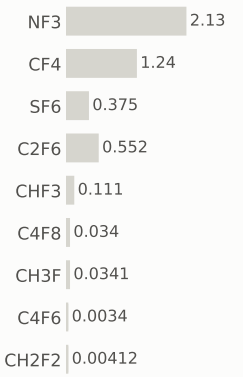

Step #8020: Resist

depo_fill · Resist

0.169	361.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

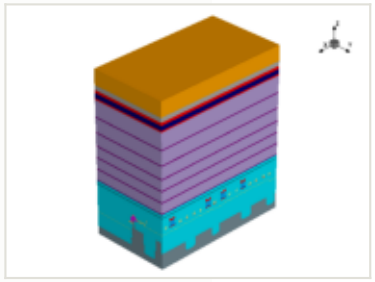

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

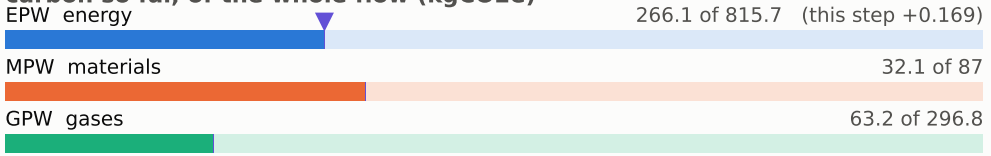

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

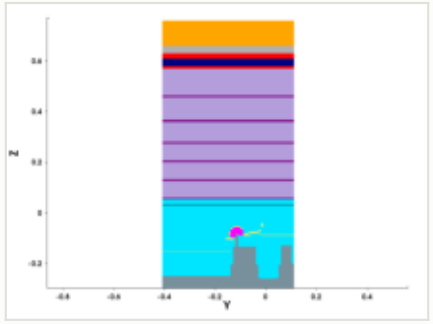

y cut at -0.150 µm

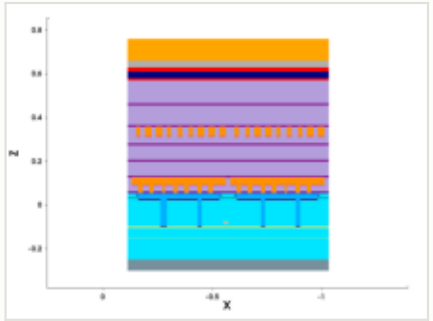

mask for this step

no mask for this step

steps by process area

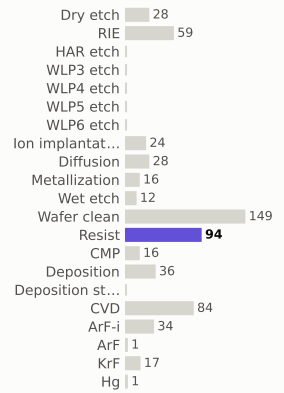

materials deposited (g)

gases emitted (g)

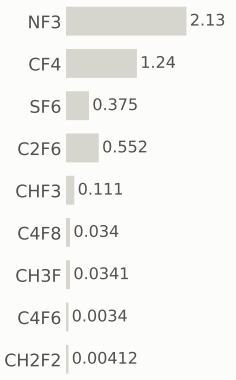

Step #8030: CVD

depo_fill · CVD

1.31	362.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

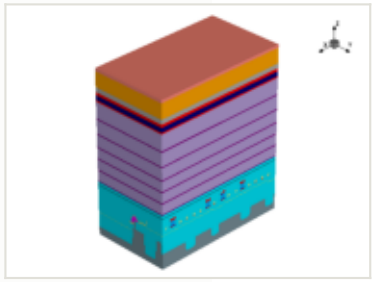

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

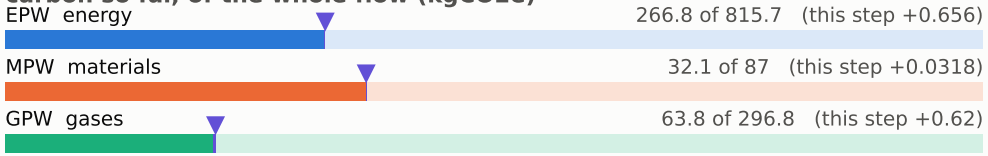

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

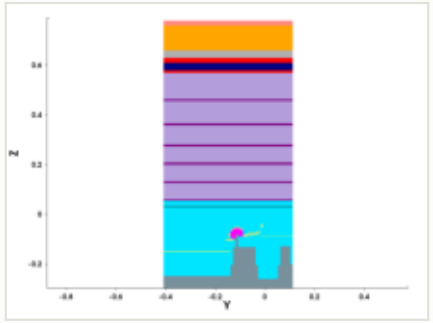

y cut at -0.150 µm

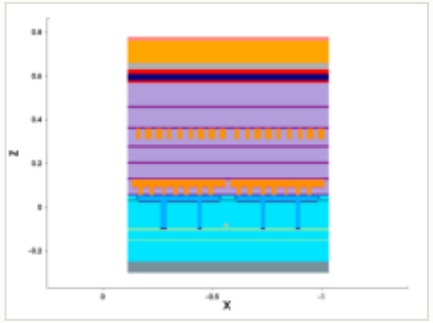

mask for this step

no mask for this step

steps by process area

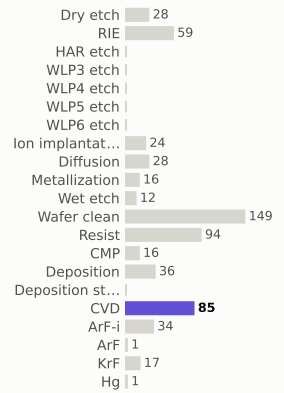

materials deposited (g)

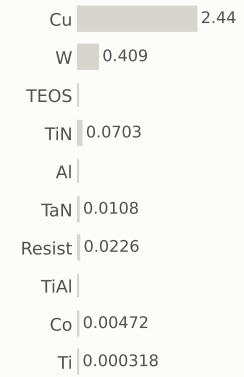

gases emitted (g)

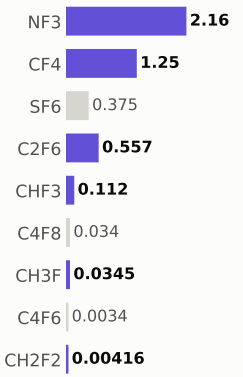

Step #8040: Wafer_clean

clean · Wafer_clean

0.169	362.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

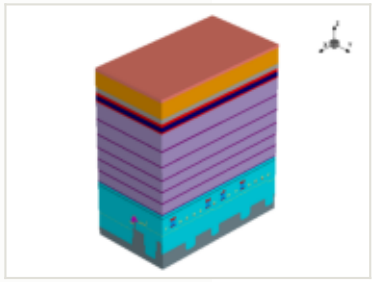

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

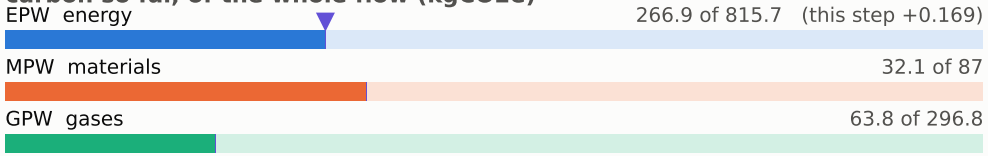

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

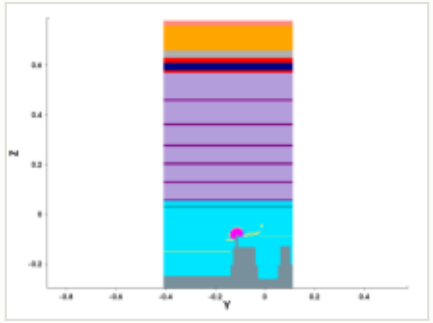

y cut at -0.150 µm

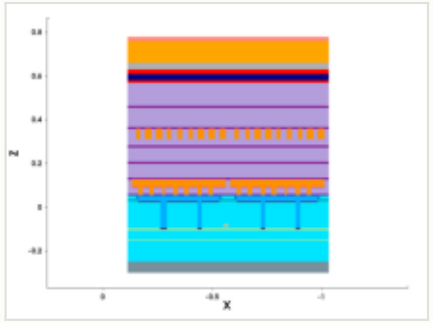

mask for this step

no mask for this step

steps by process area

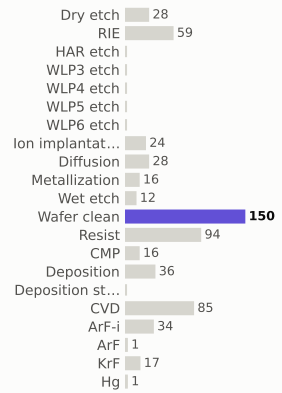

materials deposited (g)

gases emitted (g)

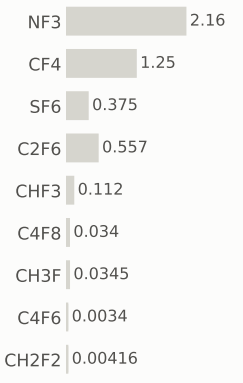

Step #8050: Resist

resist · Resist

0.169	363.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

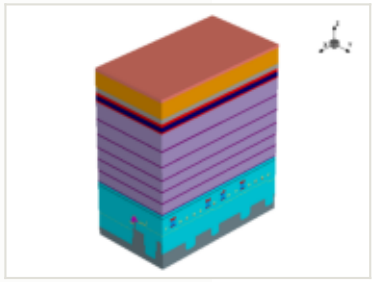

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

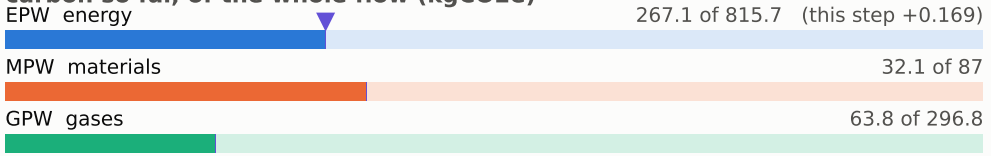

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

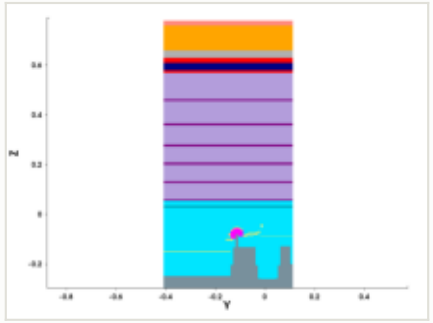

y cut at -0.150 µm

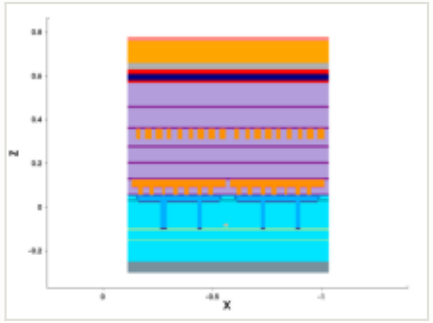

mask for this step

no mask for this step

steps by process area

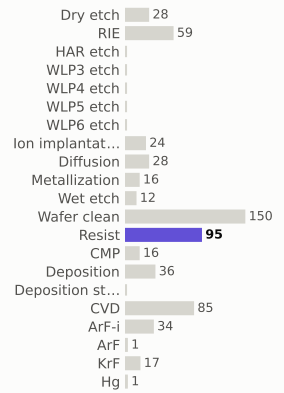

materials deposited (g)

gases emitted (g)

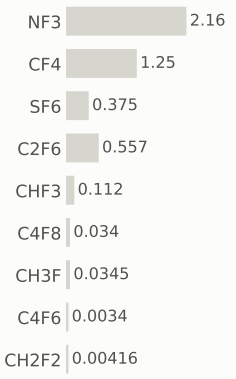

Step #8060: ArF-i

litho_patterning · ArF-i

0.217	363.2	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

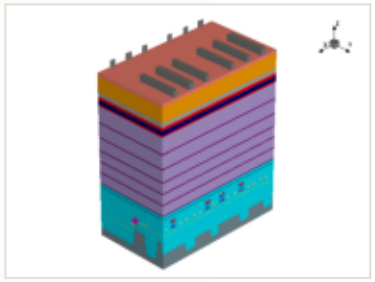

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

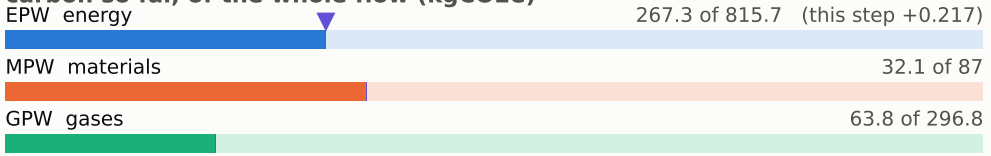

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

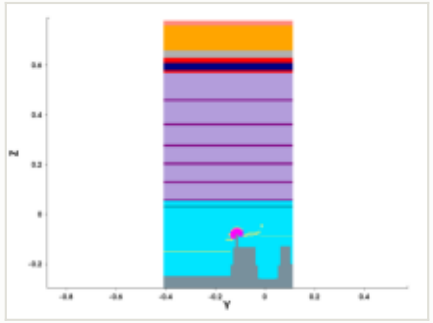

y cut at -0.150 µm

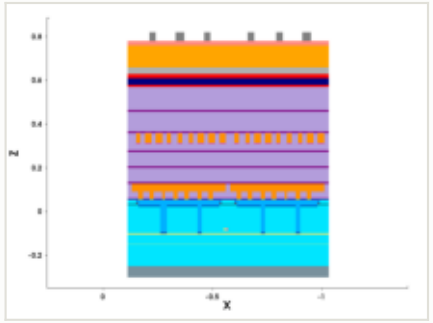

mask: layer 12601:0, positive (GDSII)

steps by process area

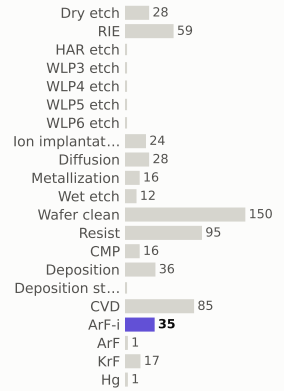

materials deposited (g)

gases emitted (g)

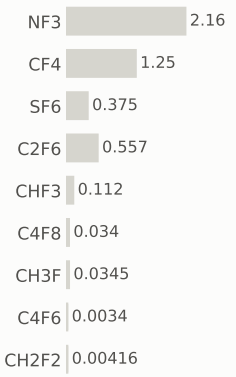

Step #8070: RIE

etch_anisotropic · RIE

1.04	364.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

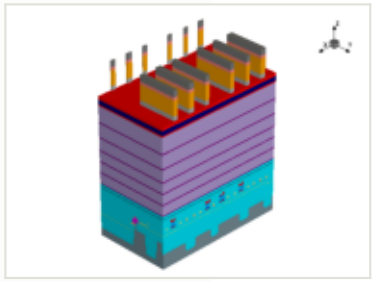

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

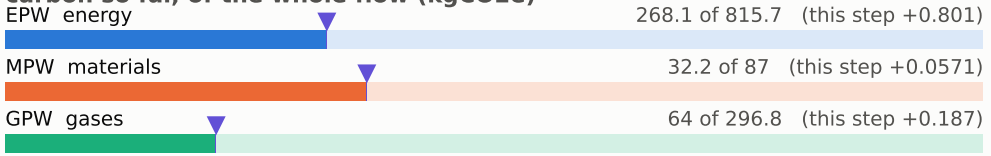

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

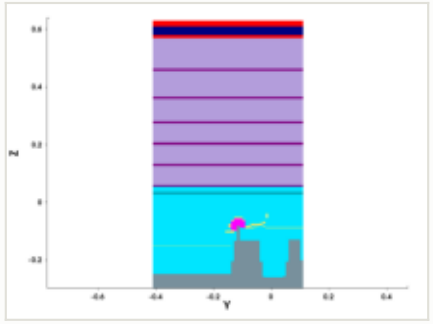

y cut at -0.150 µm

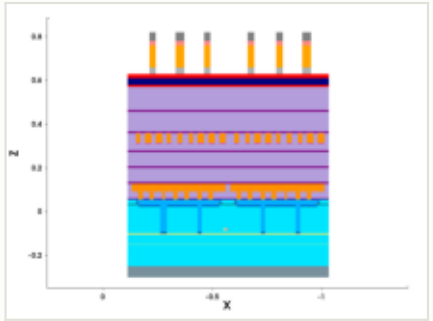

mask for this step

no mask for this step

steps by process area

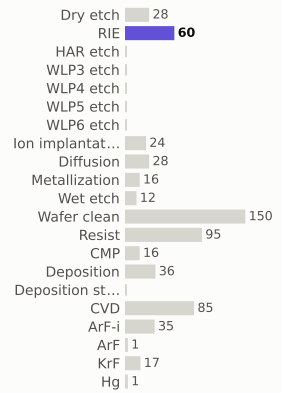

materials deposited (g)

gases emitted (g)

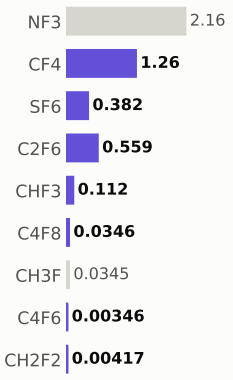

Step #8080: Spx_only

etch_strip · Spx_only

0	364.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

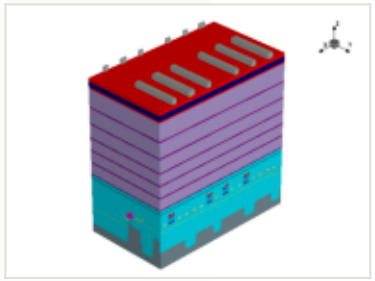

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

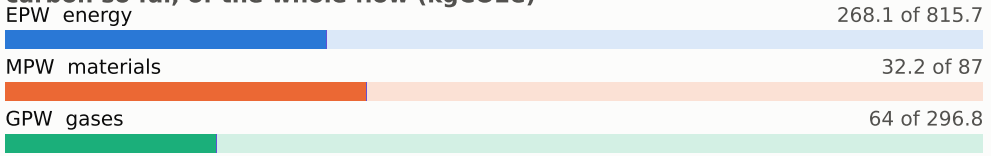

x cut at -0.570 µm

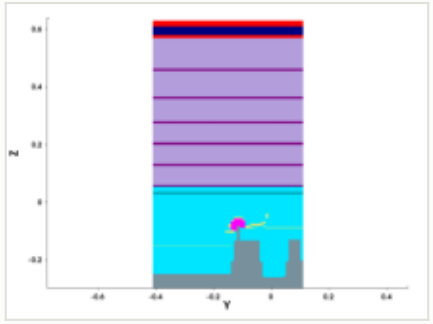

y cut at -0.150 µm

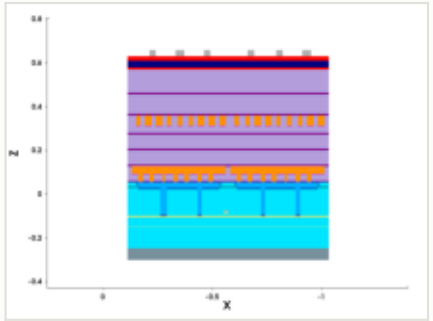

mask for this step

no mask for this step

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

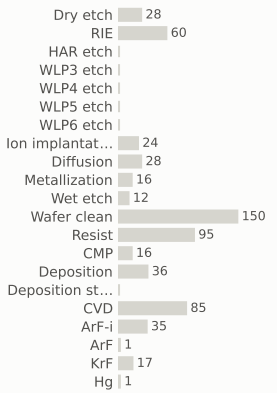

materials deposited (g)

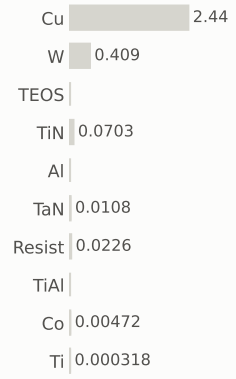

gases emitted (g)

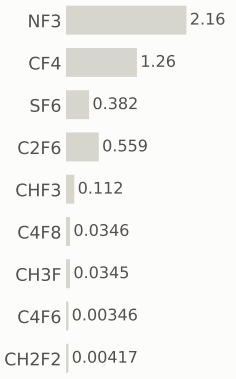

Step #8090: Spx_only

depo_isotropic · Spx_only

0	364.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

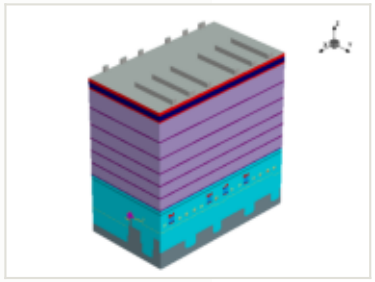

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	0.001 µm	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

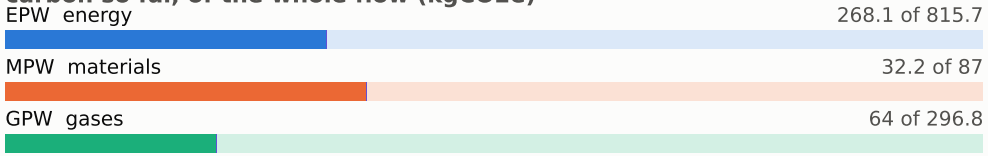

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

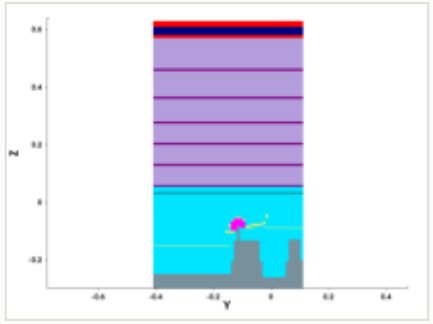

y cut at -0.150 µm

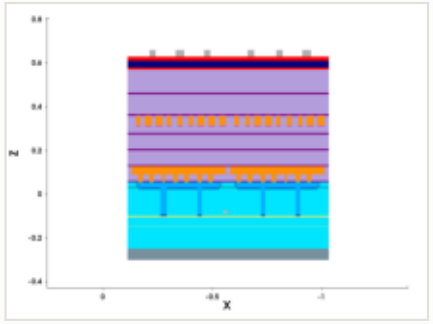

mask for this step

no mask for this step

steps by process area

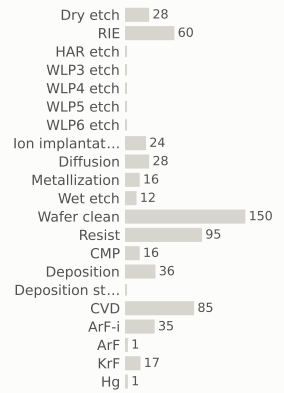

materials deposited (g)

gases emitted (g)

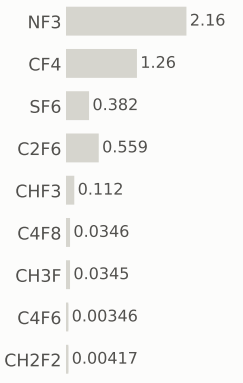

Step #8100: Spx_only

etch_anisotropic · Spx_only

0	364.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

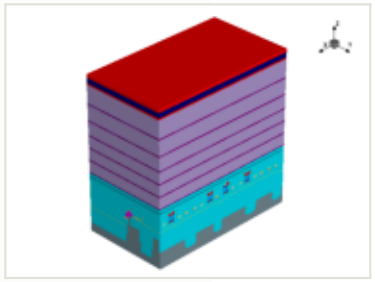

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

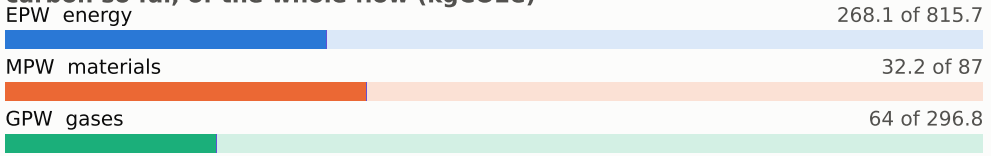

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

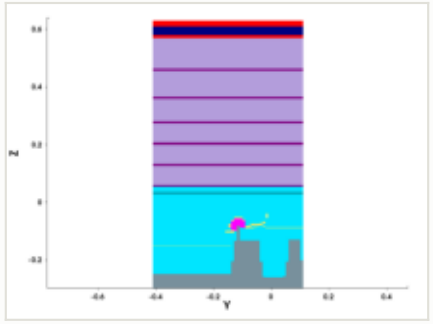

y cut at -0.150 µm

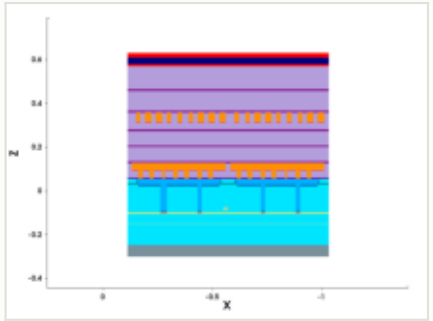

mask for this step

no mask for this step

steps by process area

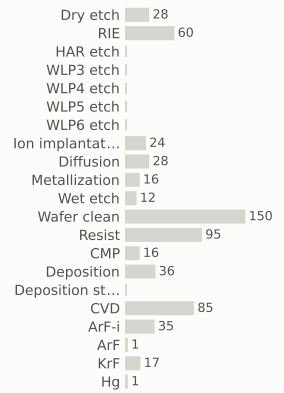

materials deposited (g)

gases emitted (g)

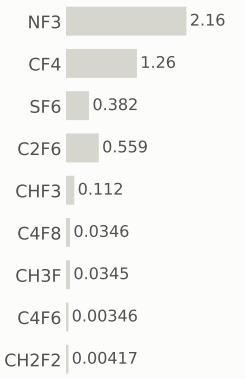

Step #8110: Spx_only

etch_strip · Spx_only

0	364.3	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

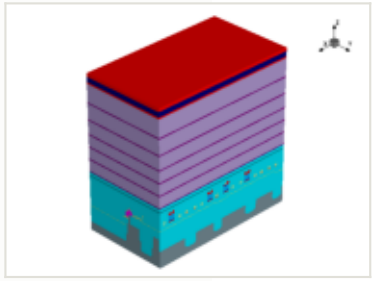

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

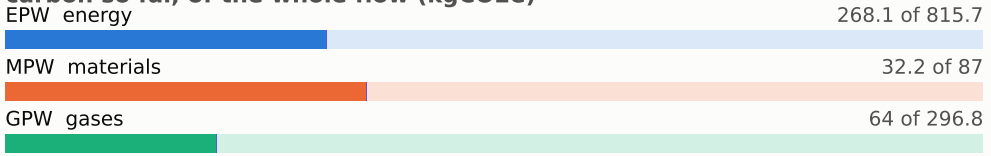

x cut at -0.570 µm

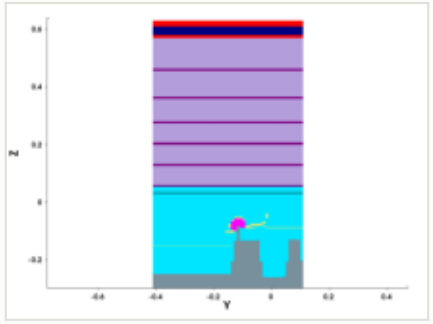

y cut at -0.150 µm

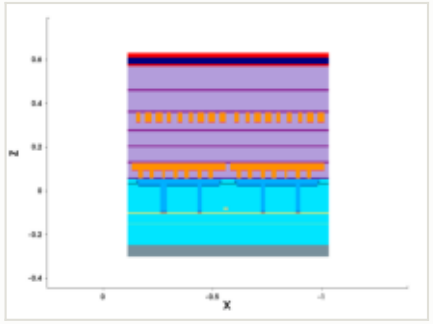

mask for this step

no mask for this step

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

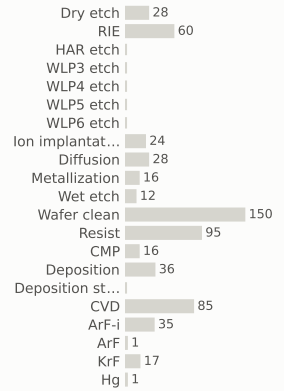

materials deposited (g)

gases emitted (g)

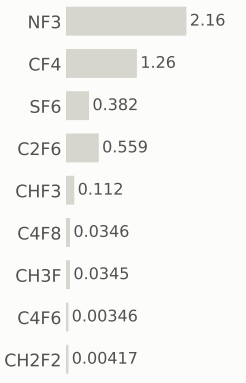

Step #8120: Wafer_clean

clean · Wafer_clean

0.169	364.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

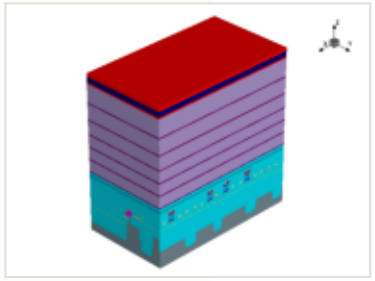

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

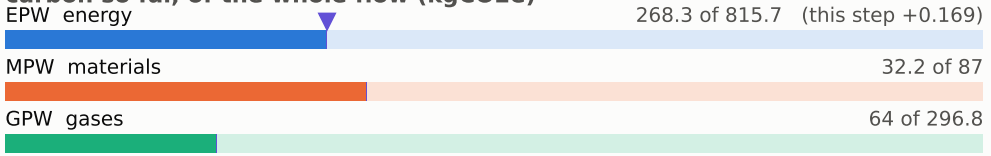

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

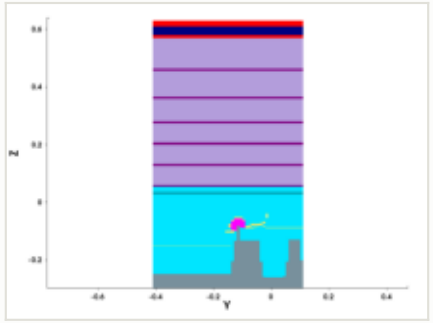

y cut at -0.150 µm

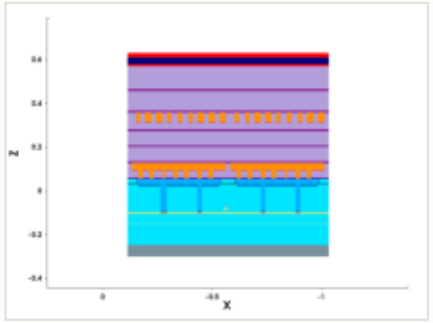

mask for this step

no mask for this step

steps by process area

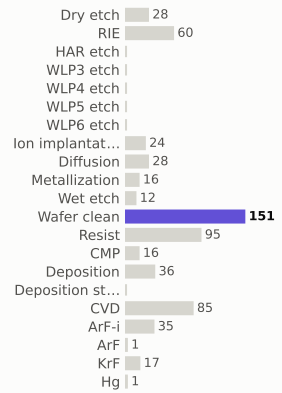

materials deposited (g)

gases emitted (g)

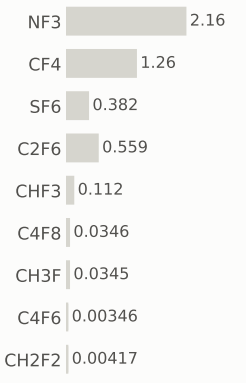

Step #8130: Resist

depo_fill · Resist

0.169	364.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

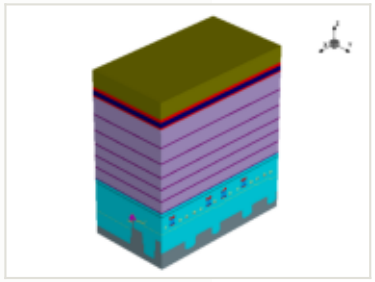

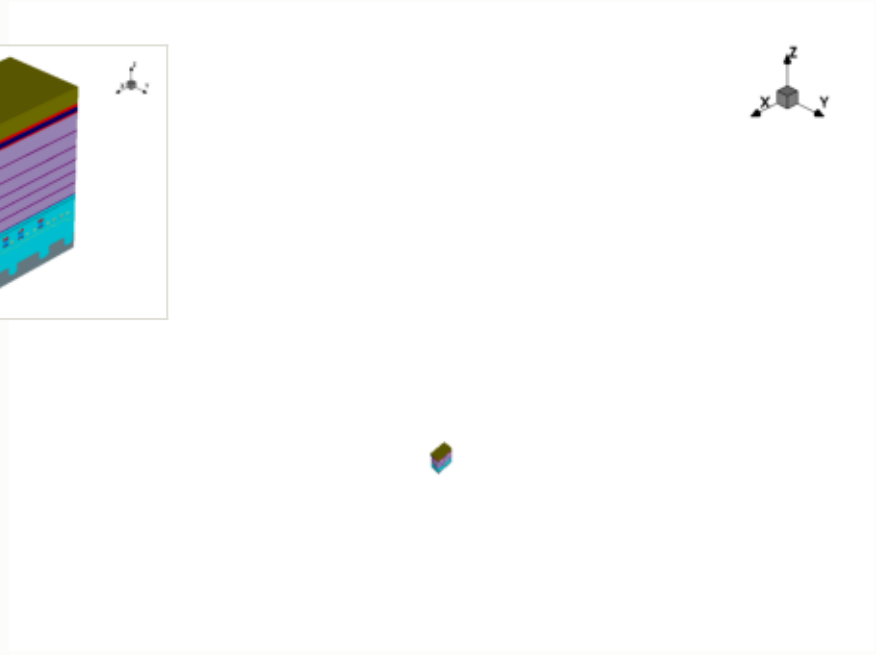

this step

process area	Resist
material	—
thickness	0.1 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

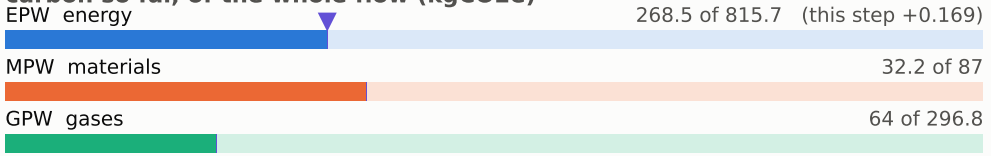

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

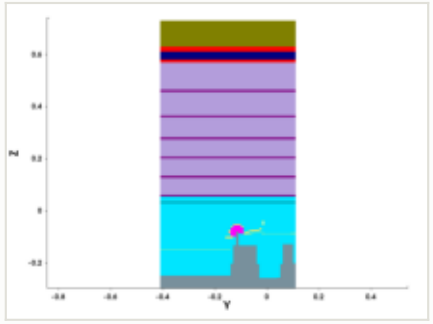

y cut at -0.150 µm

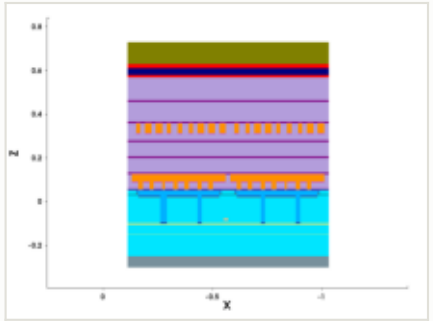

mask for this step

no mask for this step

steps by process area

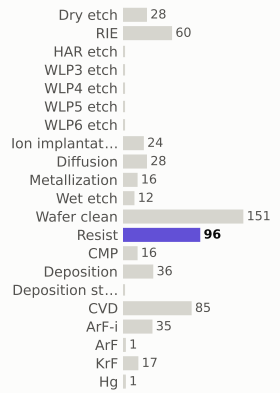

materials deposited (g)

gases emitted (g)

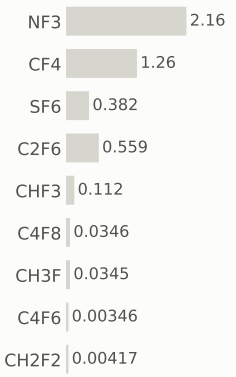

Step #8140: CVD

depo_isotropic · CVD

1.31	365.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

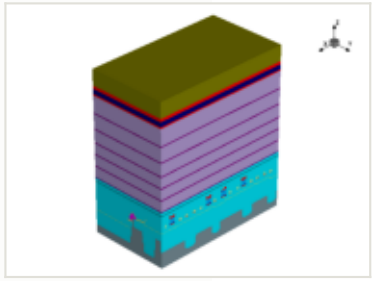

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

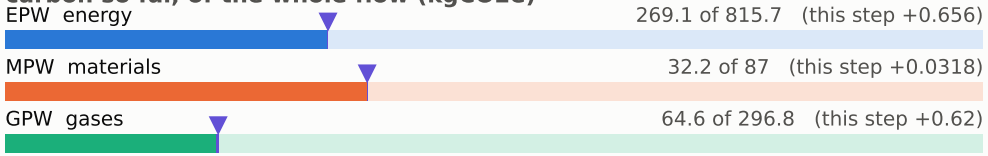

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

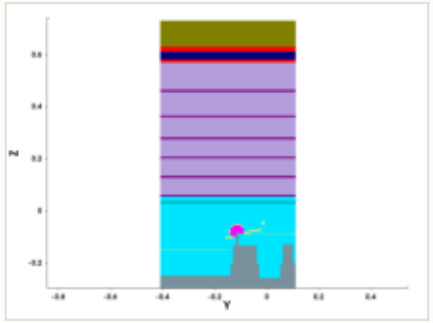

y cut at -0.150 µm

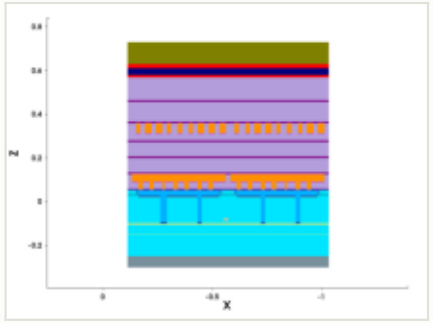

mask for this step

no mask for this step

steps by process area

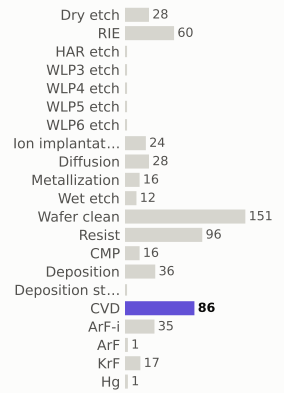

materials deposited (g)

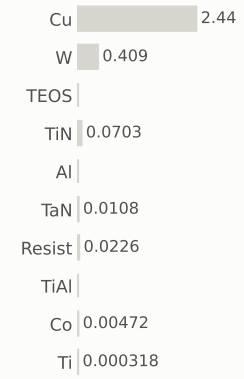

gases emitted (g)

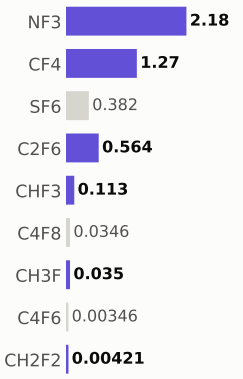

Step #8150: Wafer_clean

clean · Wafer_clean

0.169	366.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

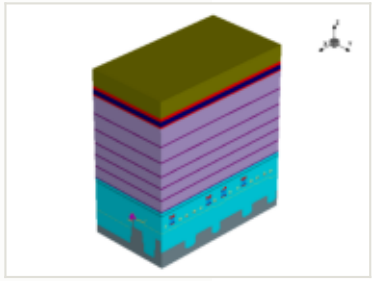

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

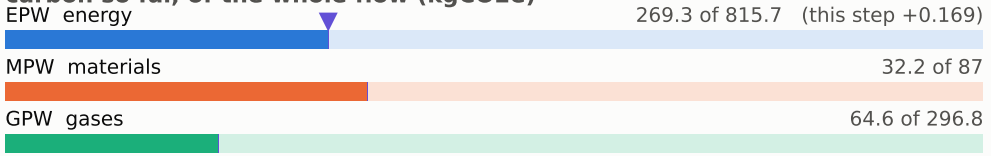

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

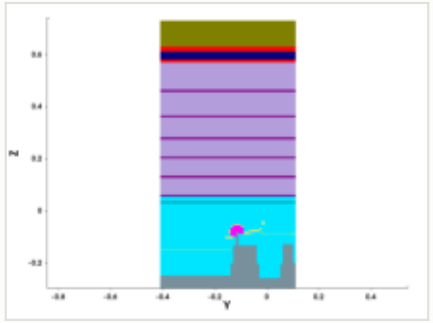

y cut at -0.150 µm

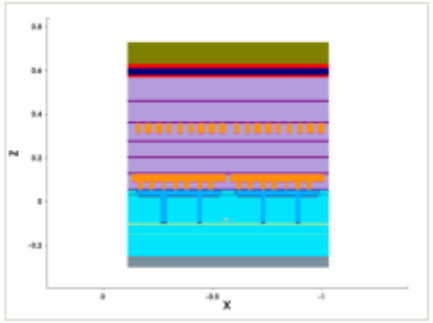

mask for this step

no mask for this step

steps by process area

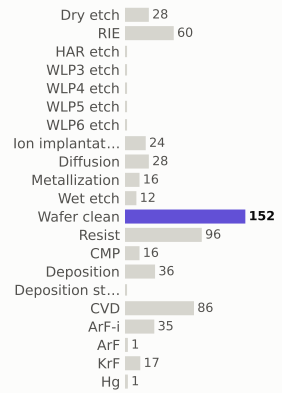

materials deposited (g)

gases emitted (g)

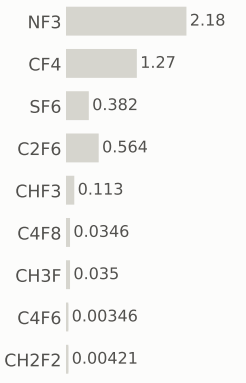

Step #8160: Resist

resist · Resist

0.169	366.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

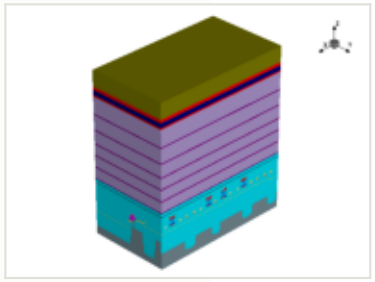

this step

process area	Resist
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

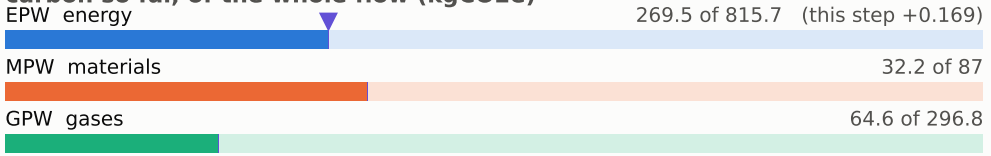

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

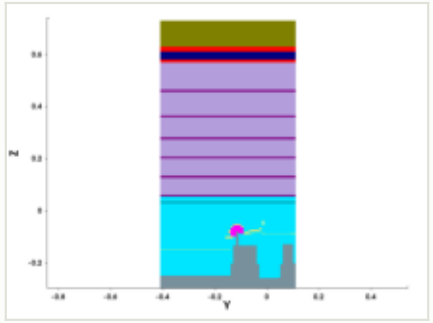

y cut at -0.150 µm

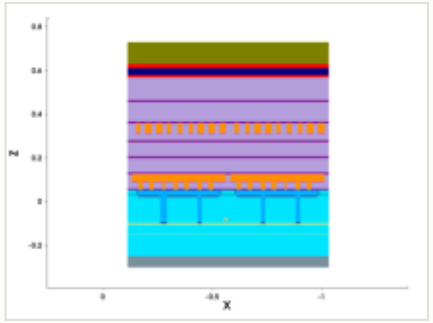

mask for this step

no mask for this step

steps by process area

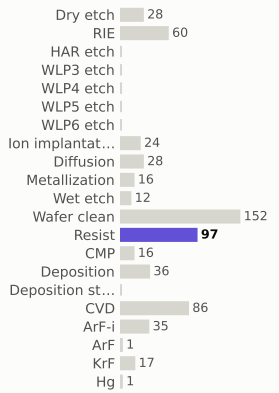

materials deposited (g)

gases emitted (g)

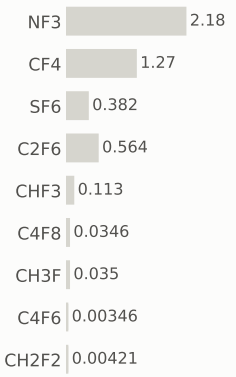

Step #8170: ArF-i

litho_patterning · ArF-i

0.217	366.5	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

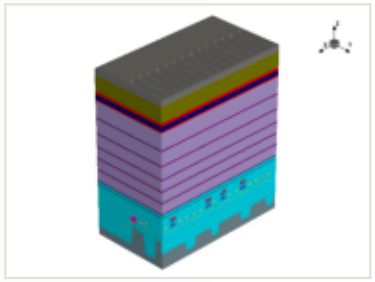

this step

process area	ArF-i	EPW	0.217 kgCO2e
material	—	EPW tool	0.155 kgCO2e
thickness	—	EPW overhead	0.0619 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.36 kWh + 0.144 overhead	embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

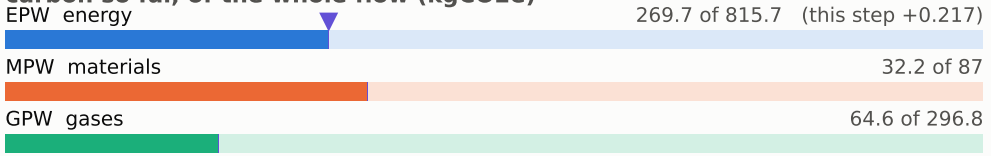

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

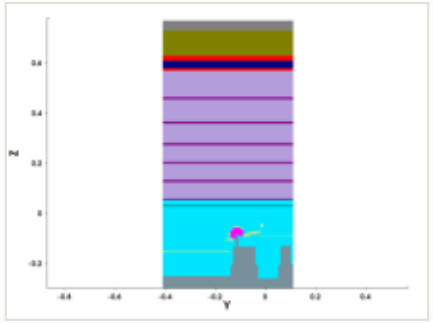

y cut at -0.150 µm

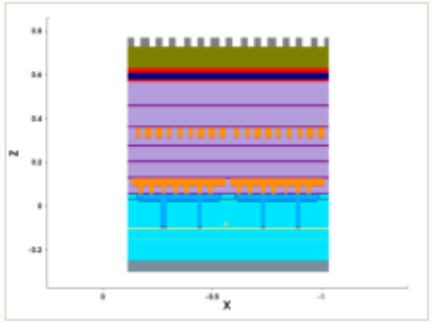

mask: layer 2060:0 (GDSII)

steps by process area

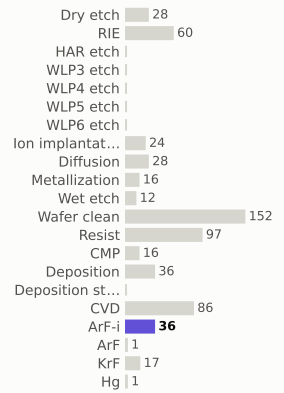

materials deposited (g)

gases emitted (g)

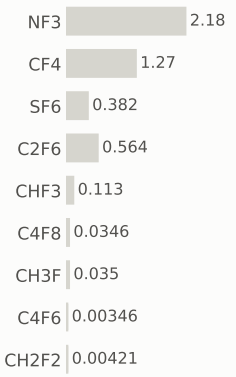

Step #8180: RIE

etch_anisotropic · RIE

1.04	367.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

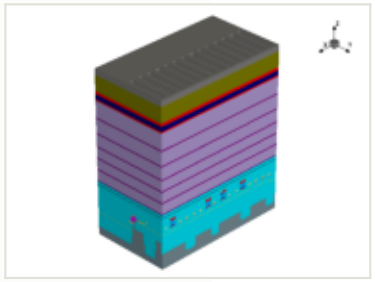

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

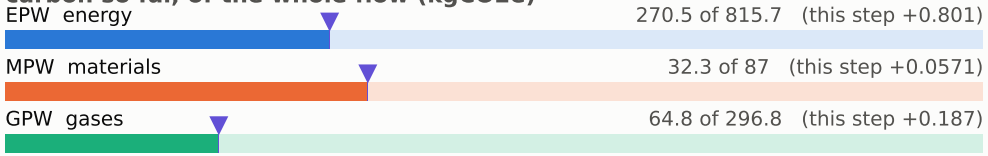

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

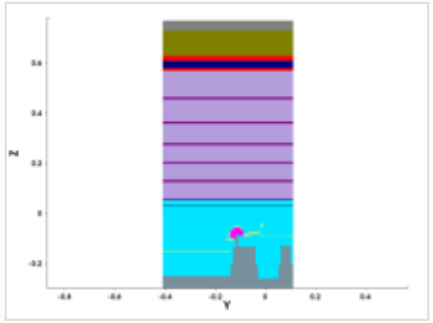

y cut at -0.150 µm

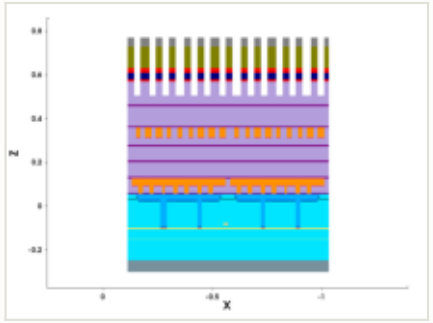

mask for this step

no mask for this step

steps by process area

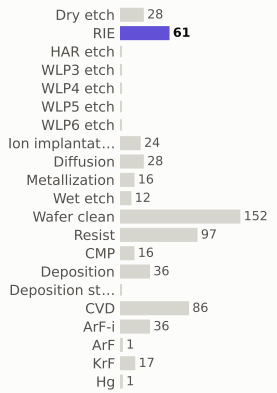

materials deposited (g)

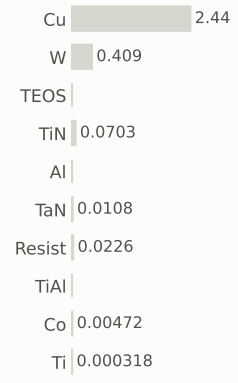

gases emitted (g)

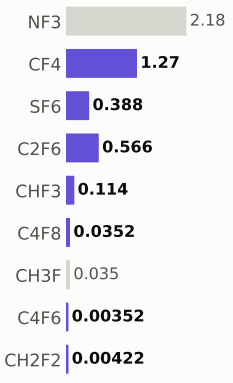

Step #8190: Spx_only

etch_strip · Spx_only

0	367.5	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

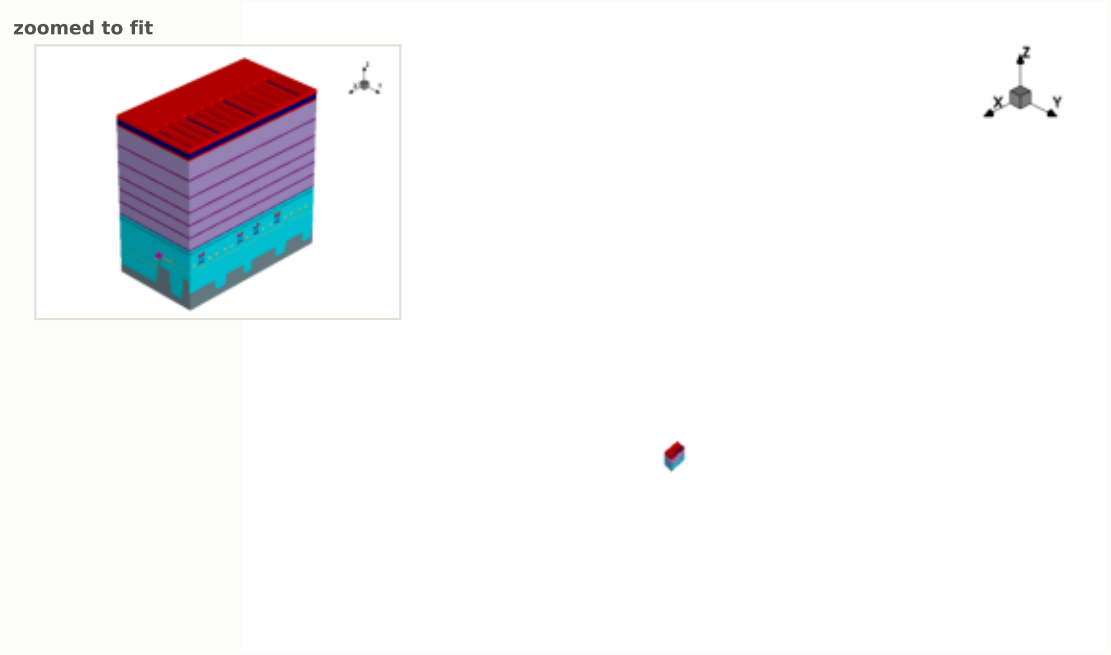

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

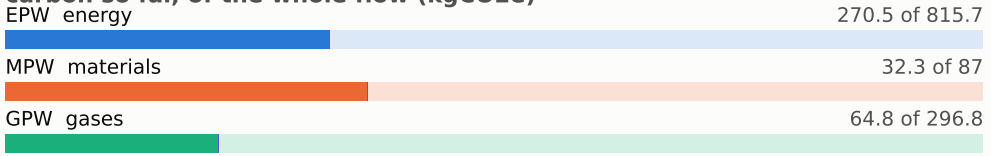

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

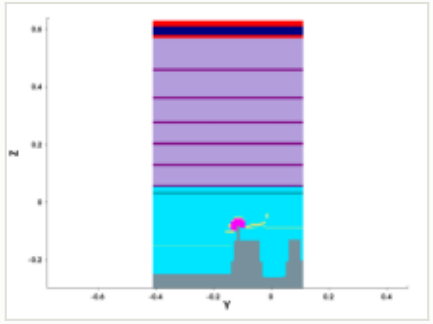

y cut at -0.150 µm

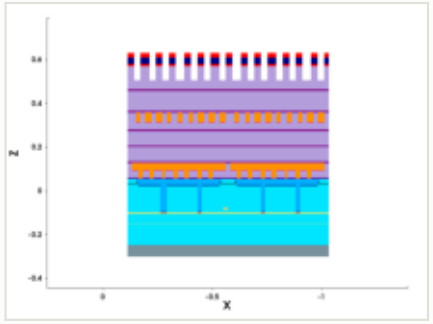

mask for this step

no mask for this step

steps by process area

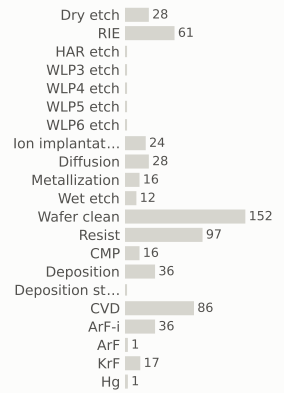

materials deposited (g)

gases emitted (g)

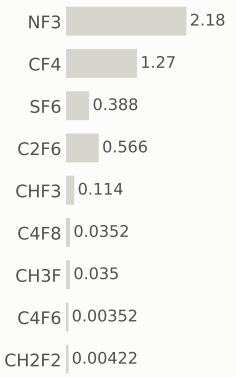

Step #8200: Wafer_clean

clean · Wafer_clean

0.169	367.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

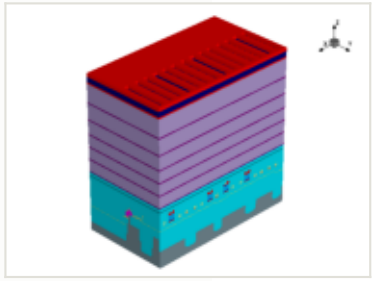

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

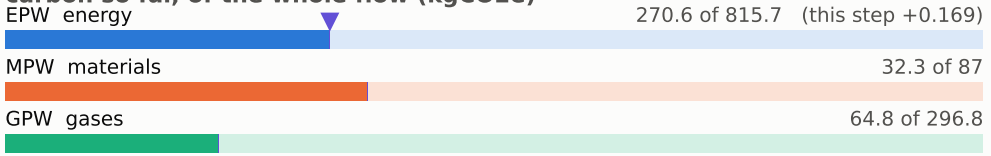

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

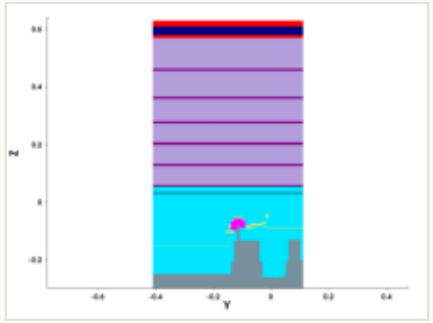

y cut at -0.150 µm

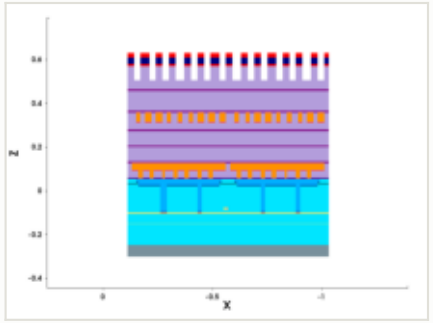

mask for this step

no mask for this step

steps by process area

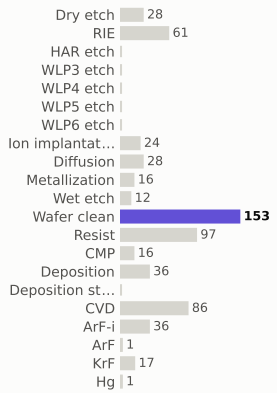

materials deposited (g)

gases emitted (g)

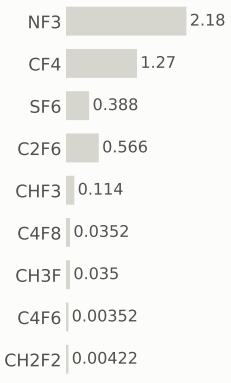

Step #8210: Metallization

depo_ellipsoidal · Metallization

1.2	368.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

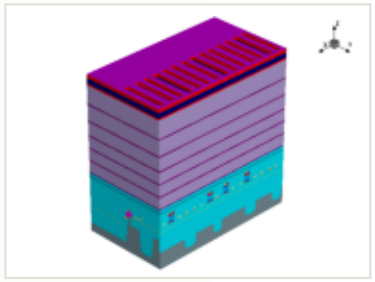

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

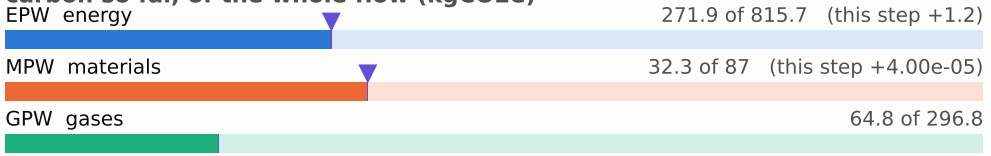

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

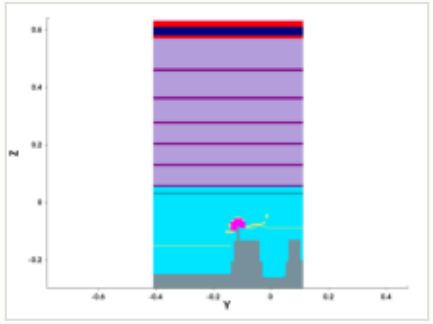

y cut at -0.150 µm

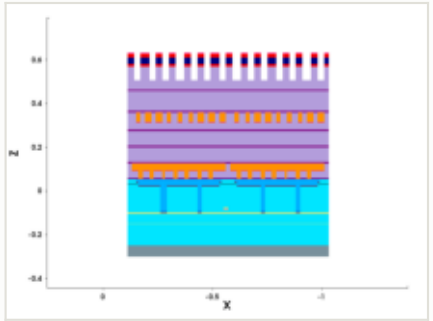

mask for this step

no mask for this step

steps by process area

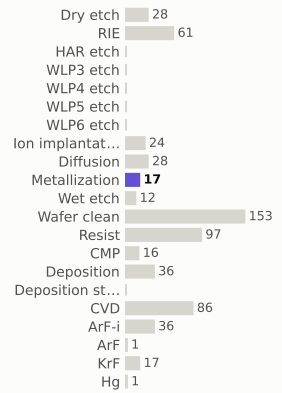

materials deposited (g)

gases emitted (g)

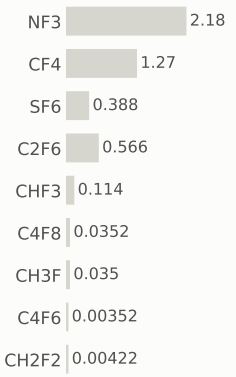

Step #8220: Metallization

depo_fill · Metallization

1.21	370.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

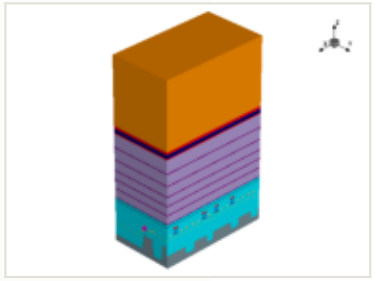

this step

process area	Metallization
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

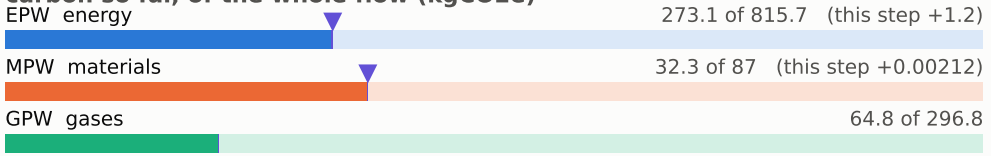

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

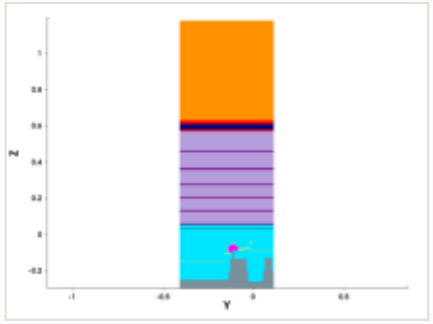

y cut at -0.150 µm

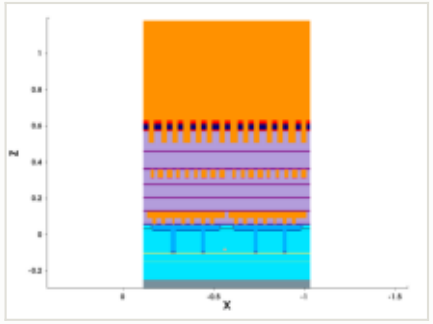

mask for this step

no mask for this step

steps by process area

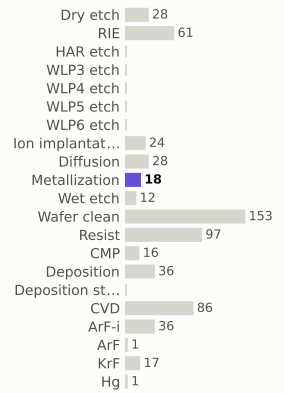

materials deposited (g)

gases emitted (g)

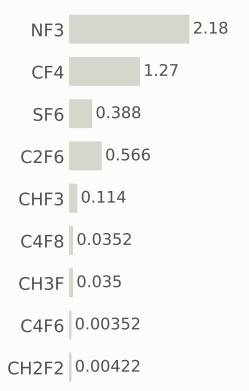

Step #8230: Diffusion

anneal · Diffusion

0.801	370.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

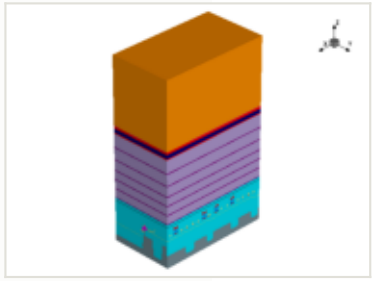

x cut at -0.570 µm

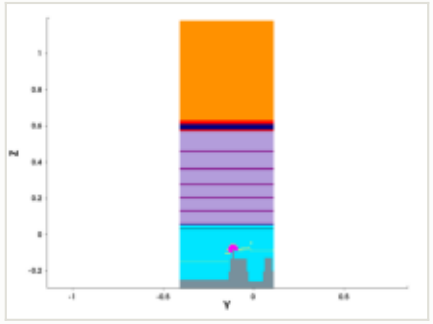

y cut at -0.150 µm

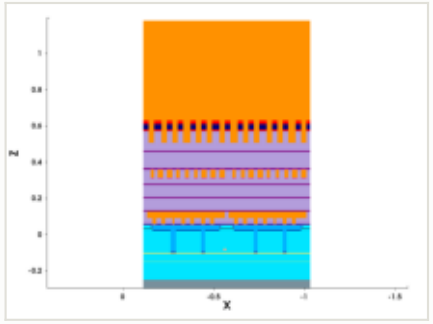

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

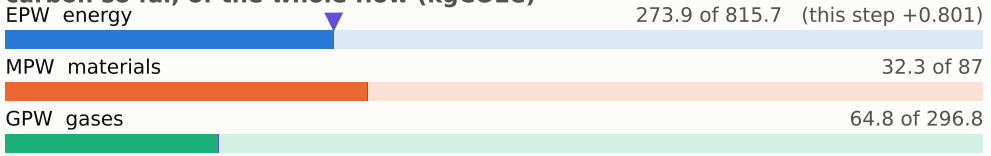

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

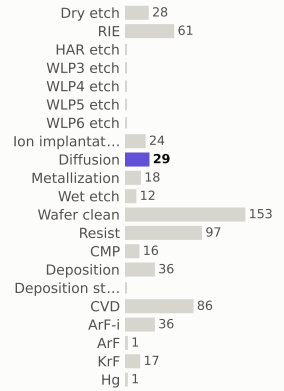

materials deposited (g)

gases emitted (g)

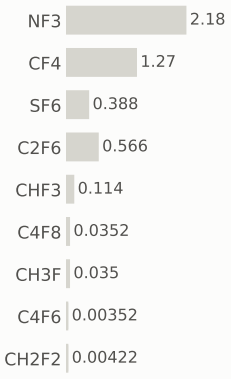

Step #8240: CMP

etch_cmp · CMP

0.169	371.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

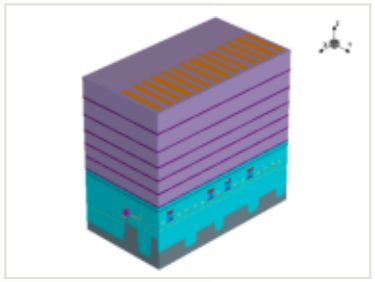

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

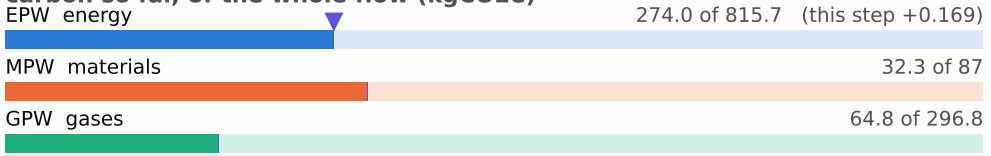

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

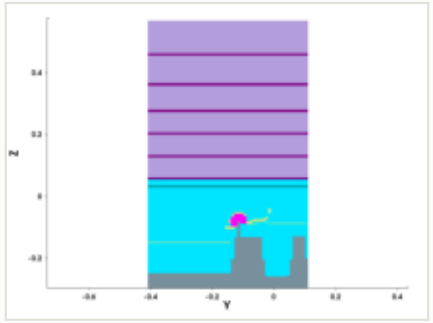

y cut at -0.150 µm

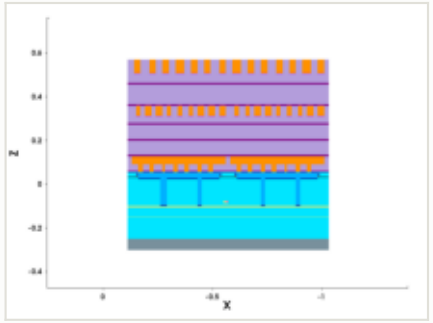

mask for this step

no mask for this step

steps by process area

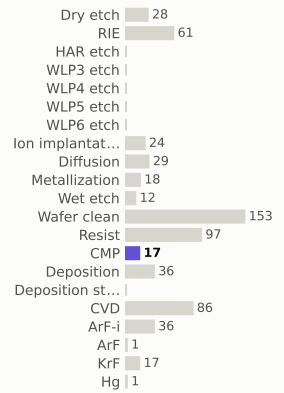

materials deposited (g)

gases emitted (g)

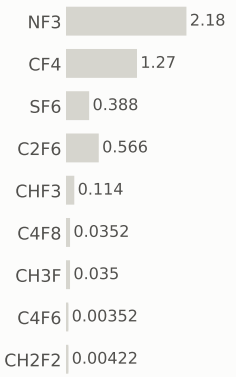

Step #8250: Spx_only

depo_isotropic · Spx_only

4.20e-05	371.1	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

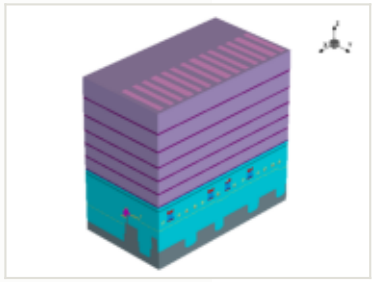

x cut at -0.570 µm

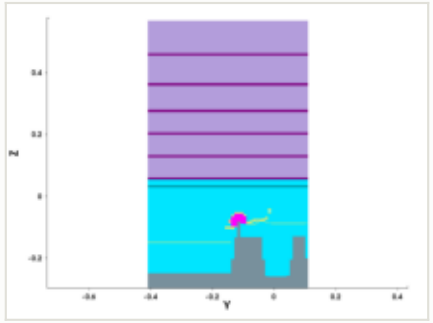

y cut at -0.150 µm

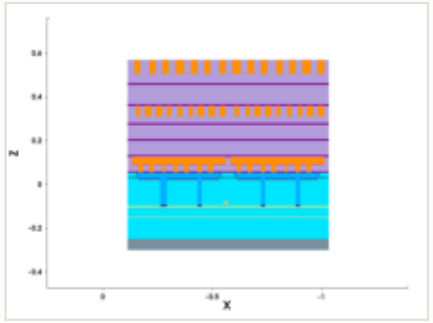

mask for this step

no mask for this step

this step

process area	Spx_only	EPW	0 kgCO2e
material	Co	EPW tool	0 kgCO2e
thickness	0.0015 µm	EPW overhead	0 kgCO2e
material GWP	44.5 gCO2e/g	MPW	4.20e-05 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**4.20e-05 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

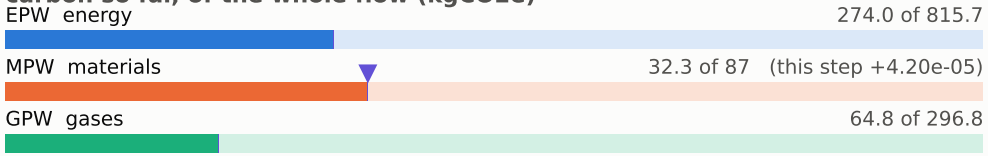

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

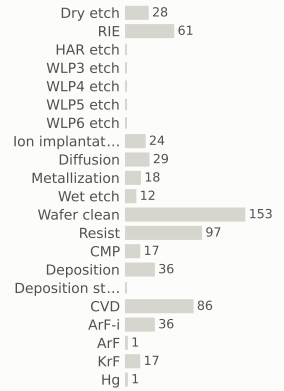

materials deposited (g)

gases emitted (g)

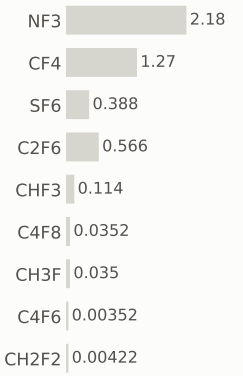

Step #8270: CVD

depo_fill · CVD

1.31	372.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

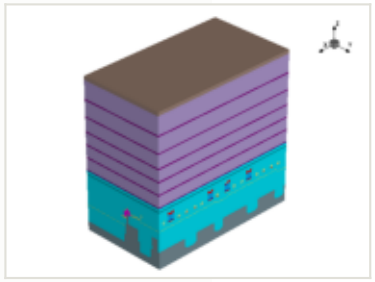

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

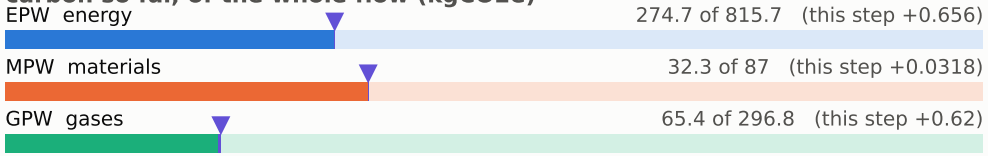

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

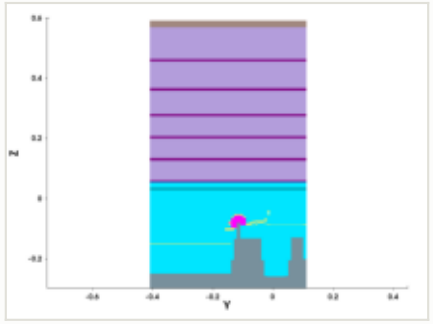

y cut at -0.150 µm

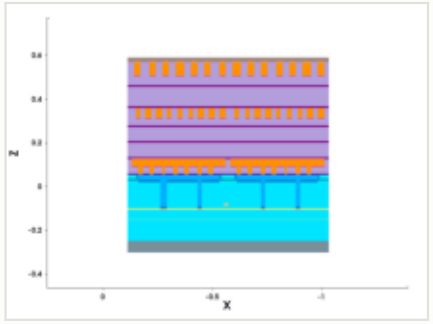

mask for this step

no mask for this step

steps by process area

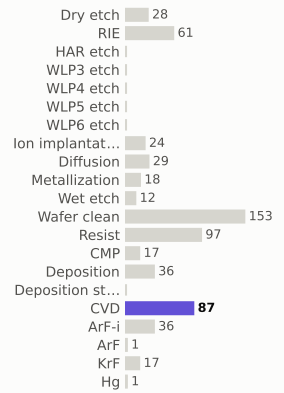

materials deposited (g)

gases emitted (g)

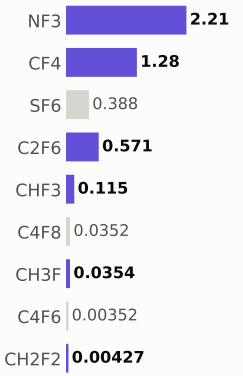

Step #8280: CVD

depo_isotropic · CVD

1.31	373.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

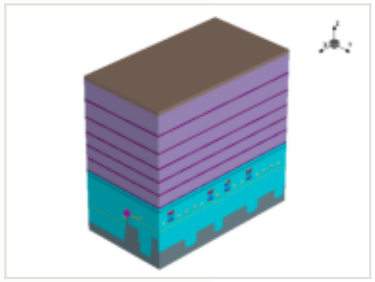

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

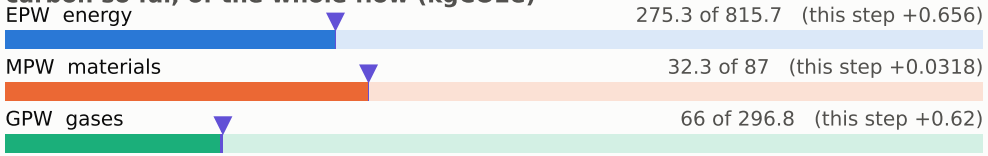

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

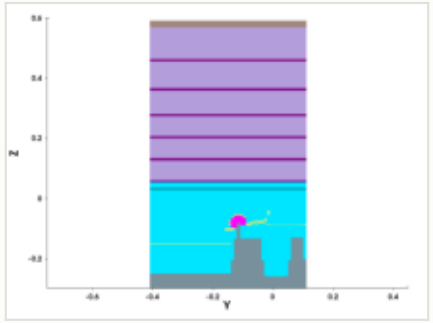

y cut at -0.150 µm

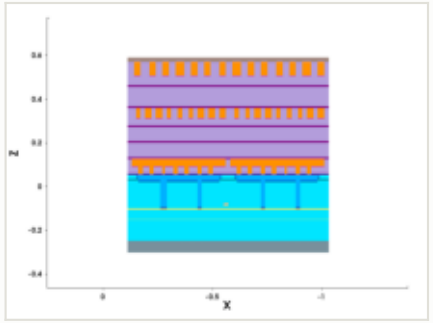

mask for this step

no mask for this step

steps by process area

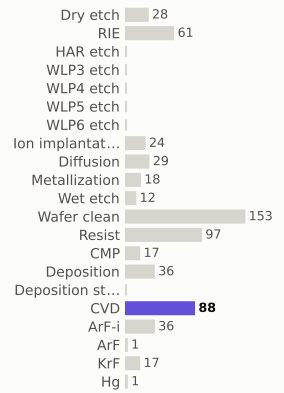

materials deposited (g)

gases emitted (g)

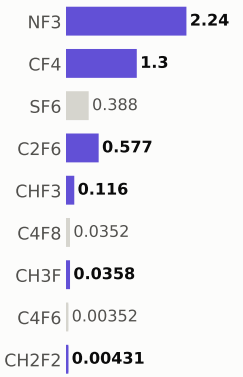

Step #8290: CVD

depo_fill · CVD

1.31	375.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

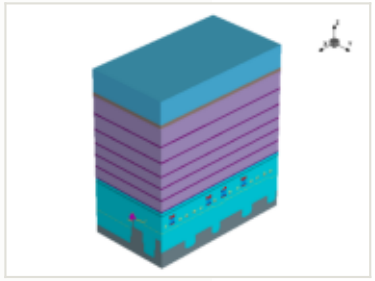

this step

process area	CVD
material	—
thickness	0.14 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

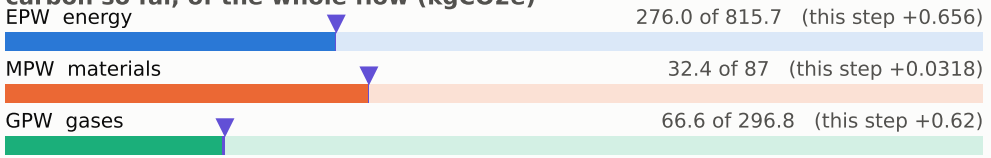

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

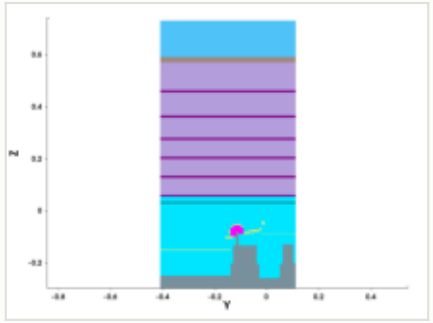

y cut at -0.150 µm

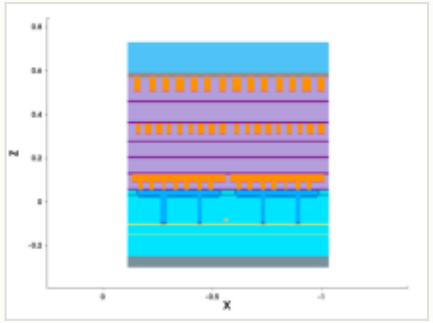

mask for this step

no mask for this step

steps by process area

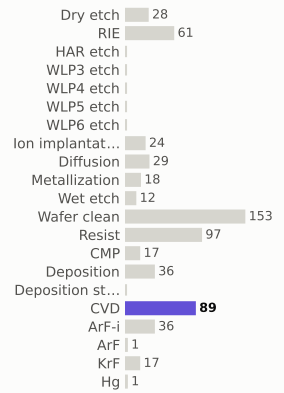

materials deposited (g)

gases emitted (g)

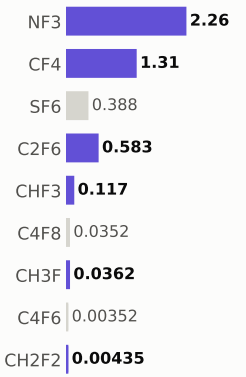

Step #8300: Spx_only

litho_patterning · Spx_only

0	375.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

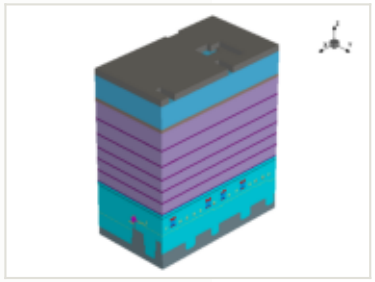

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

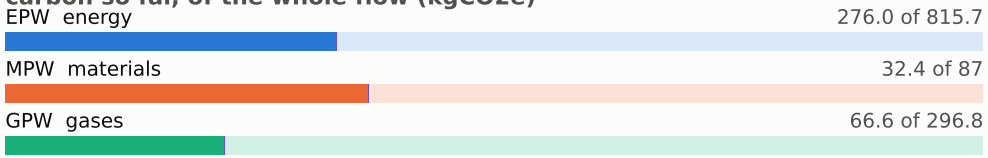

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

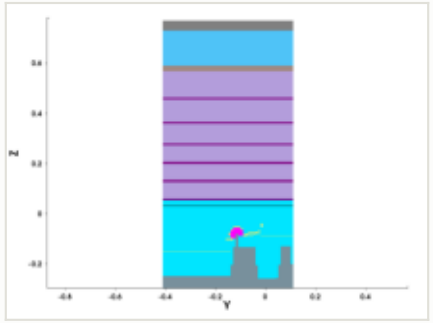

y cut at -0.150 µm

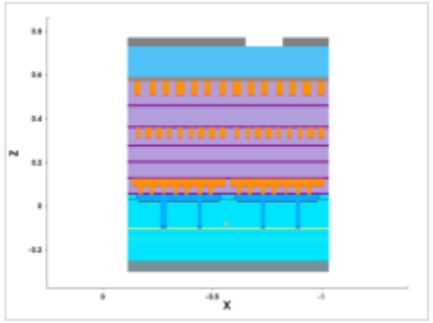

mask: layer 2900:0 (GDSII)

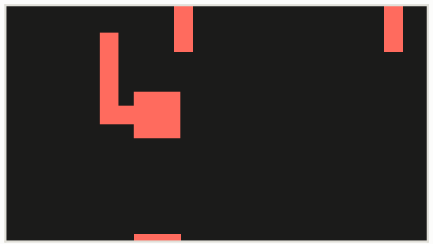

steps by process area

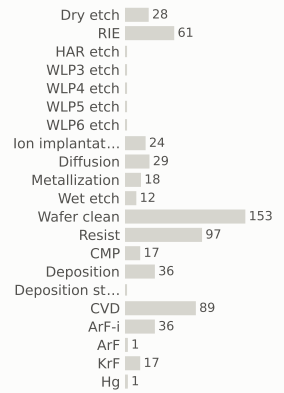

materials deposited (g)

gases emitted (g)

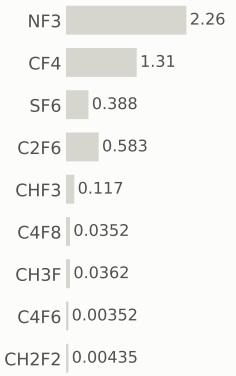

Step #8310: Spx_only

etch_anisotropic · Spx_only

0	375.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

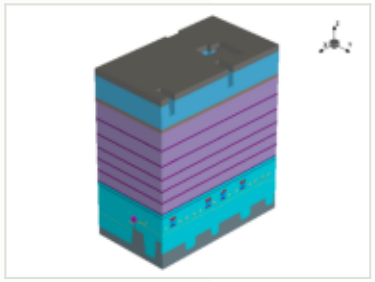

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

EPW energy 276.0 of 815.7

MPW materials 32.4 of 87

GPW gases 66.6 of 296.8

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

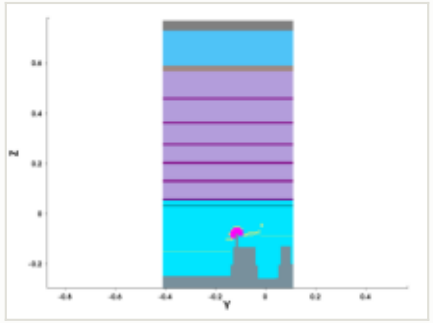

y cut at -0.150 µm

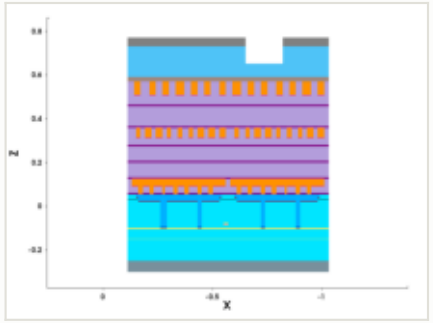

mask for this step

no mask for this step

steps by process area

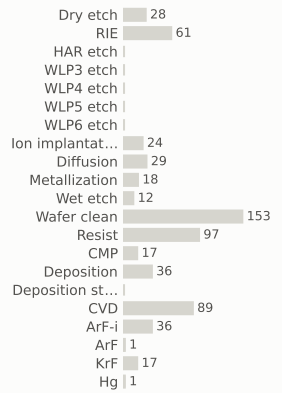

materials deposited (g)

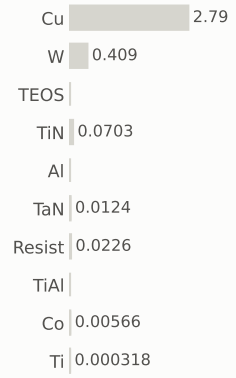

gases emitted (g)

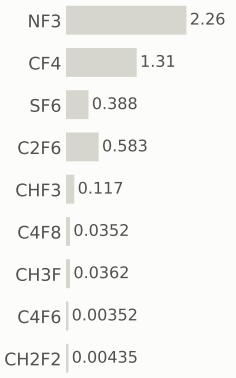

Step #8320: Spx_only

etch_strip · Spx_only

0	375.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

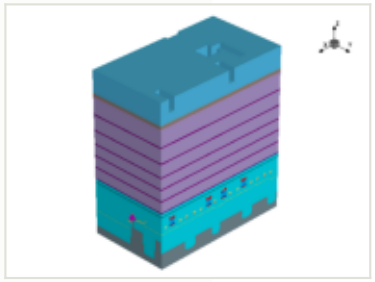

this step

process area	Spx_only	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

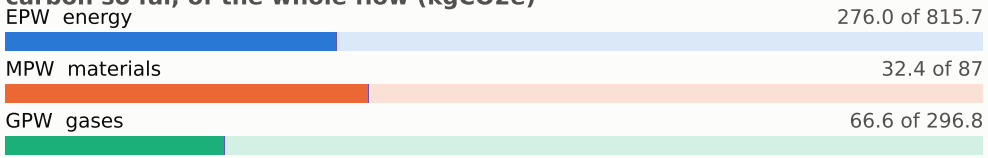

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

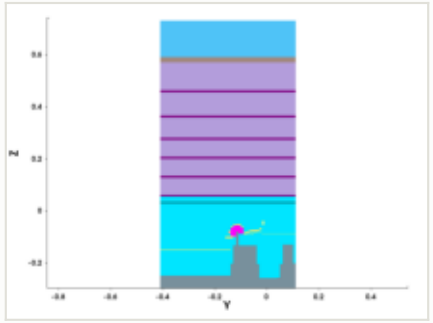

y cut at -0.150 µm

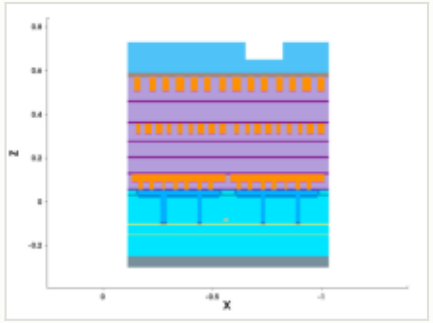

mask for this step

no mask for this step

steps by process area

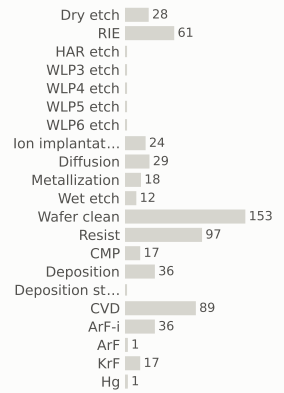

materials deposited (g)

gases emitted (g)

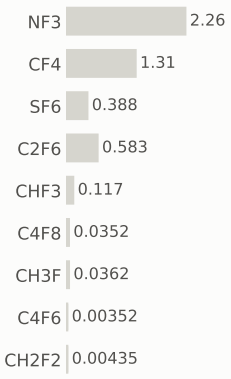

Step #8330: Wafer_clean

clean · Wafer_clean

0.169	375.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

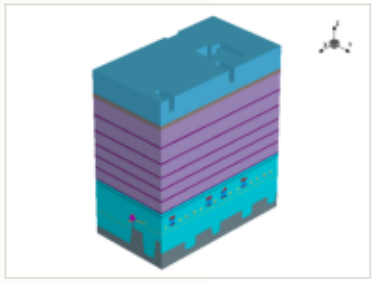

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

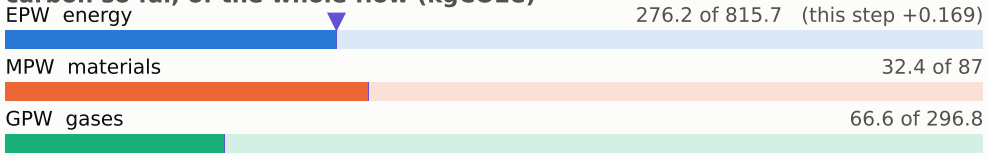

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

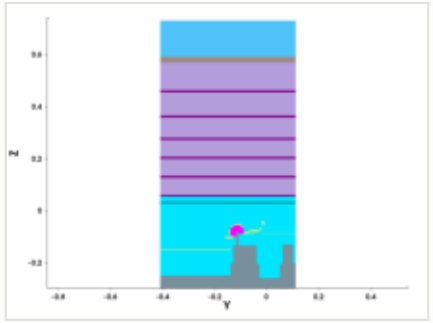

y cut at -0.150 µm

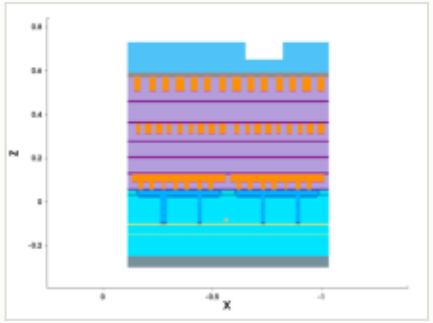

mask for this step

no mask for this step

steps by process area

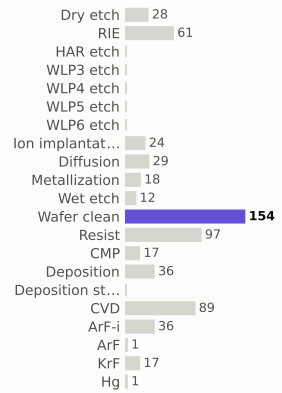

materials deposited (g)

gases emitted (g)

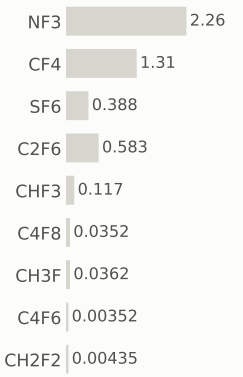

Step #8340: Resist

resist · Resist

0.169	375.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

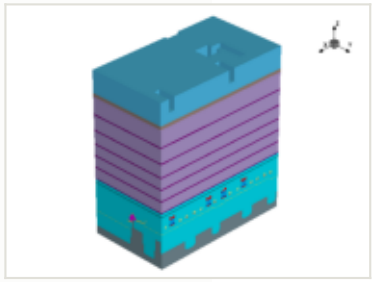

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

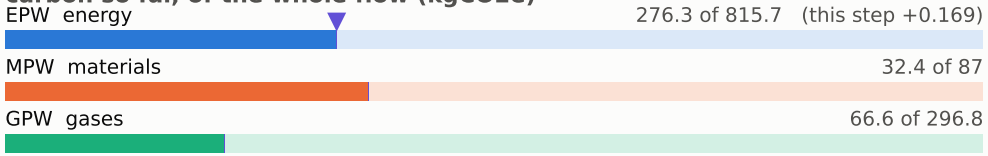

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

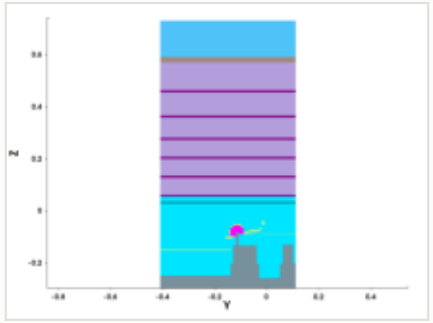

y cut at -0.150 µm

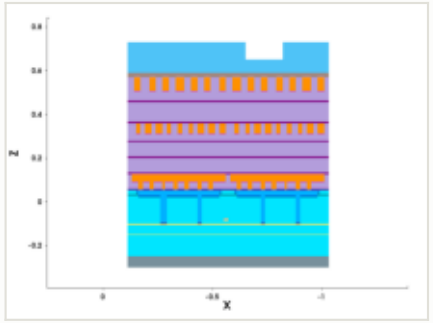

mask for this step

no mask for this step

steps by process area

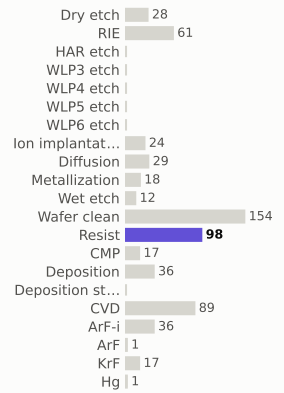

materials deposited (g)

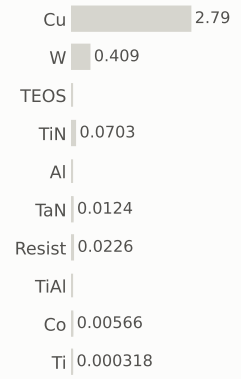

gases emitted (g)

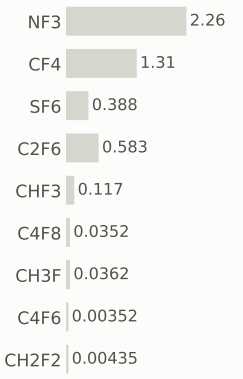

Step #8350: Hg

litho_patterning · Hg

0.199	375.5	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

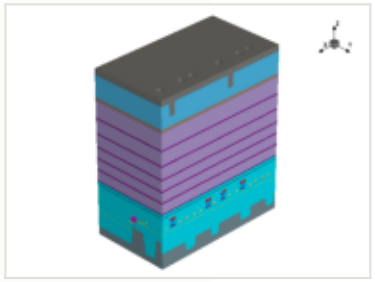

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

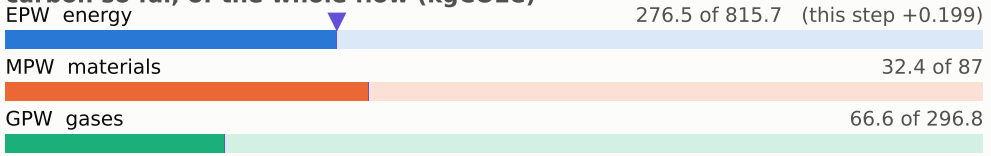

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

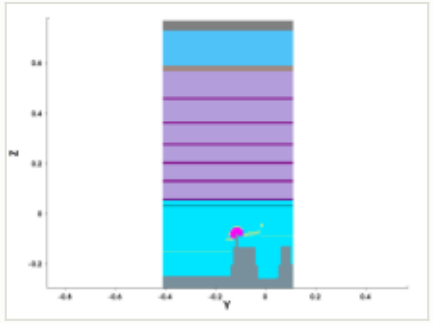

y cut at -0.150 µm

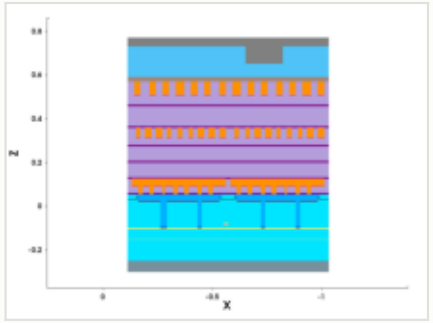

mask: layer 2085:0 (GDSII)

steps by process area

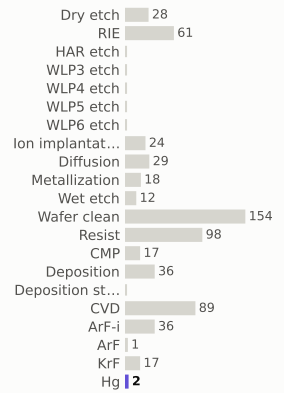

materials deposited (g)

gases emitted (g)

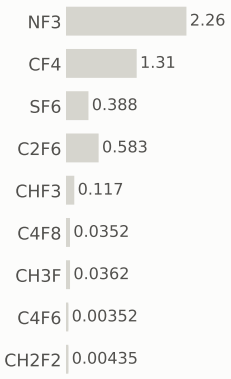

Step #8360: RIE

etch_anisotropic · RIE

1.04	376.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

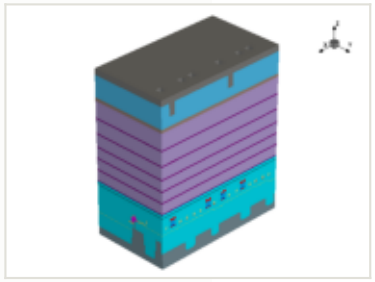

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

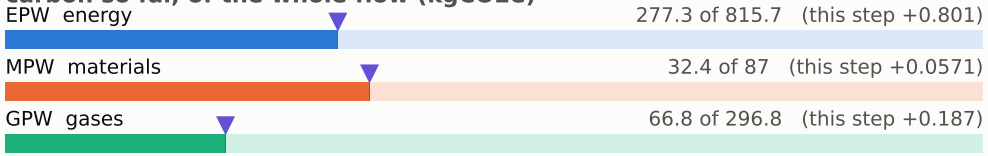

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

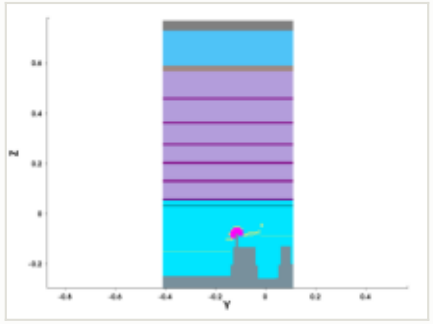

y cut at -0.150 µm

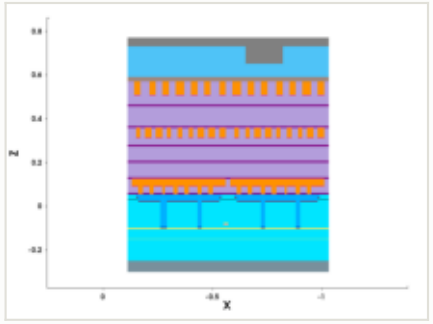

mask for this step

no mask for this step

steps by process area

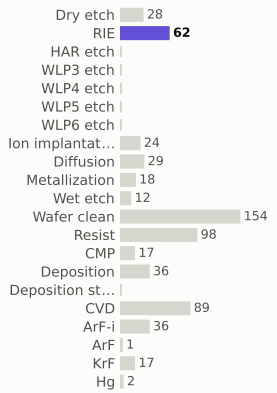

materials deposited (g)

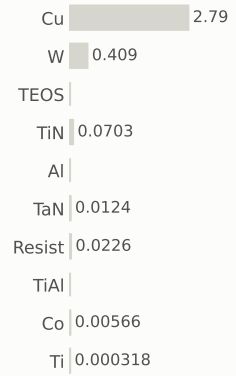

gases emitted (g)

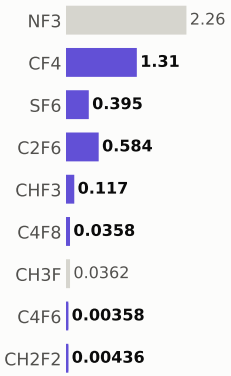

Step #8370: RIE

etch_strip · RIE

1.04	377.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

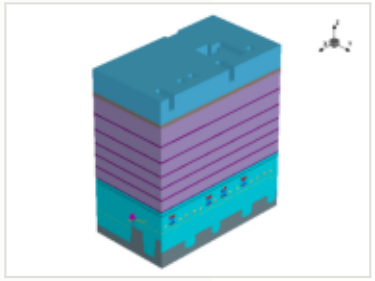

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

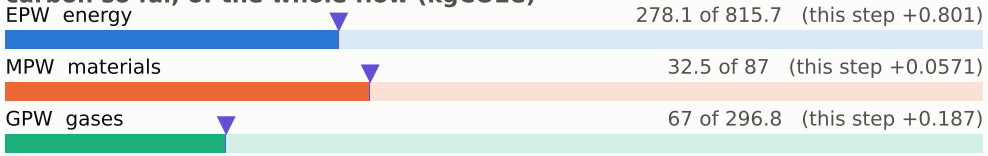

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

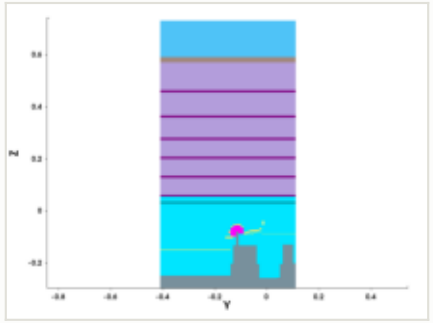

y cut at -0.150 µm

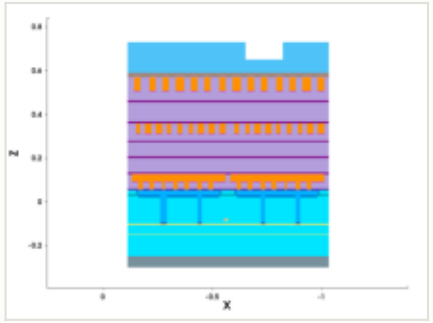

mask for this step

no mask for this step

steps by process area

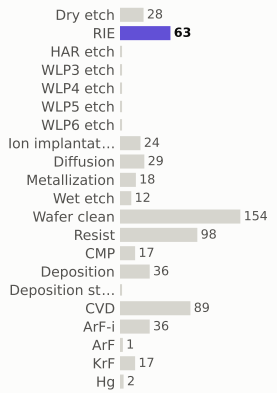

materials deposited (g)

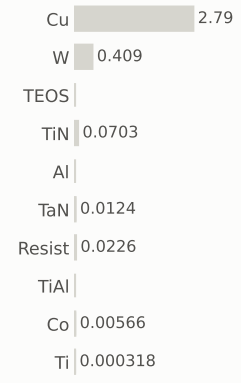

gases emitted (g)

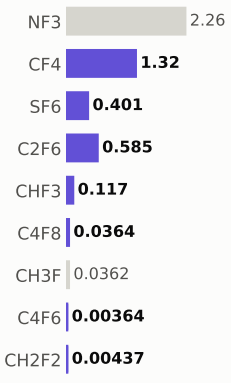

Step #8380: Wafer_clean

clean · Wafer_clean

0.169	377.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

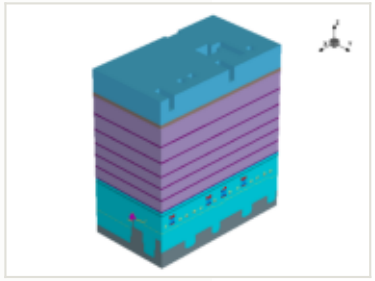

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

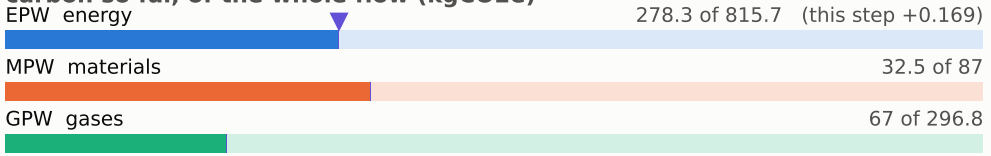

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

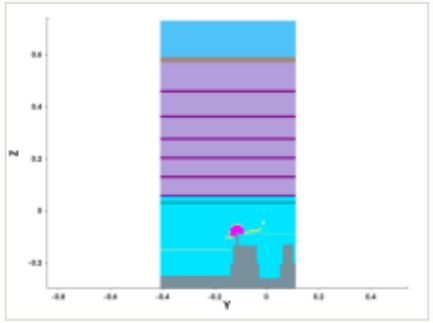

y cut at -0.150 µm

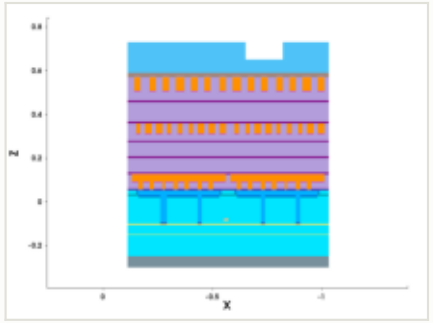

mask for this step

no mask for this step

steps by process area

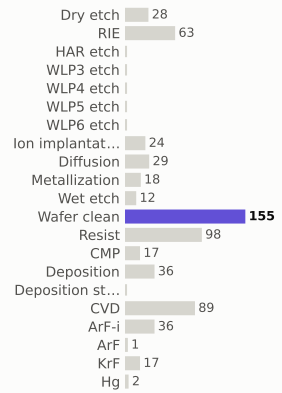

materials deposited (g)

gases emitted (g)

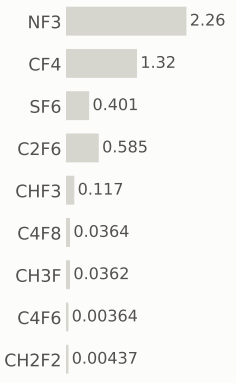

Step #8390: Metallization

depo_ellipsoidal · Metallization

1.2	379.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

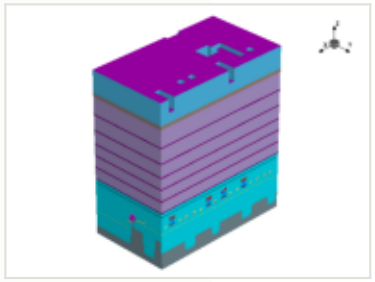

this step

process area	Metallization
material	TaN
thickness	0.0016 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.00e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

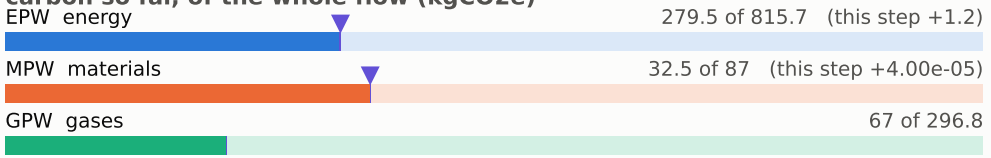

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

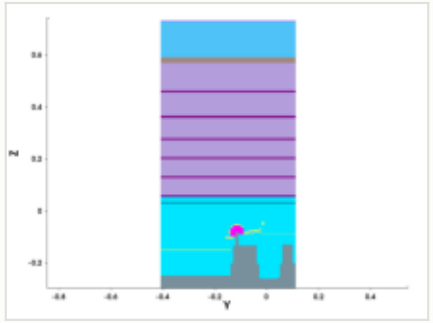

y cut at -0.150 µm

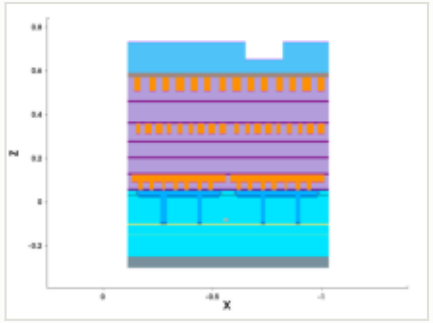

mask for this step

no mask for this step

steps by process area

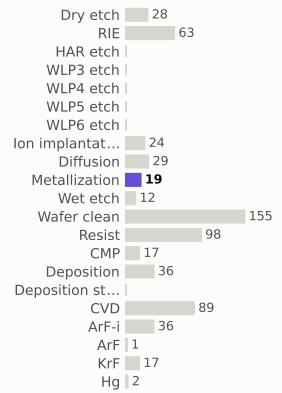

materials deposited (g)

gases emitted (g)

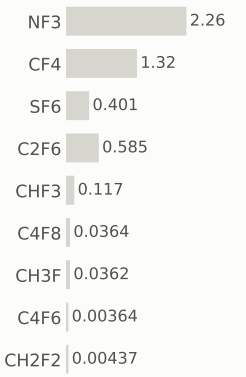

Step #8400: Spx_only

depo_fill · Spx_only

0.00212	379.0	<0.01%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

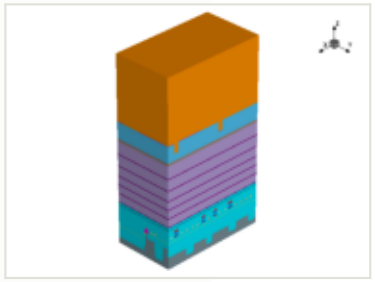

this step

process area	Spx_only
material	Cu
thickness	0.55 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0.00212 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.00212 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

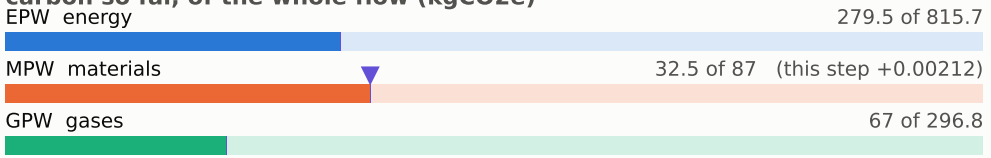

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

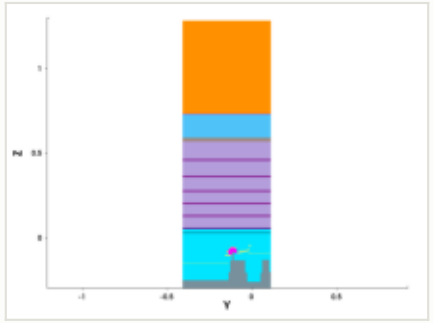

y cut at -0.150 µm

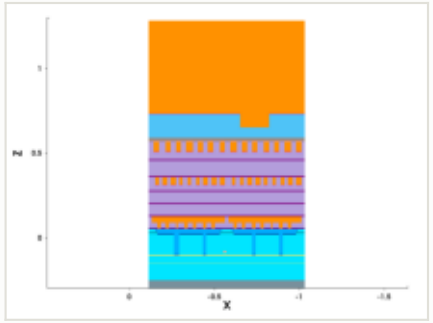

mask for this step

no mask for this step

steps by process area

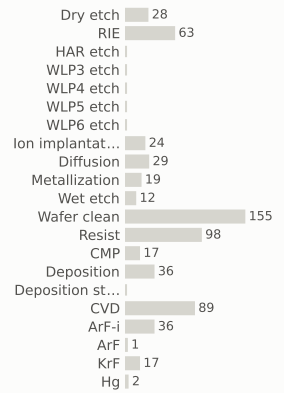

materials deposited (g)

gases emitted (g)

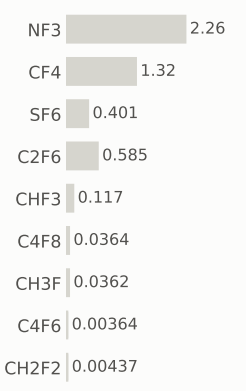

Step #8410: Spx_only

etch_cmp · Spx_only

0	379.0	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

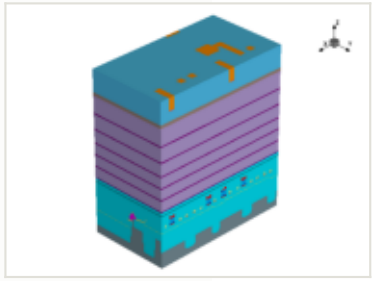

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

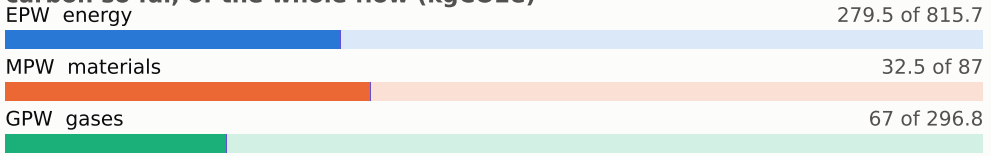

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

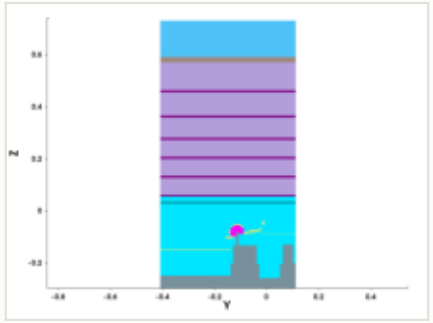

y cut at -0.150 µm

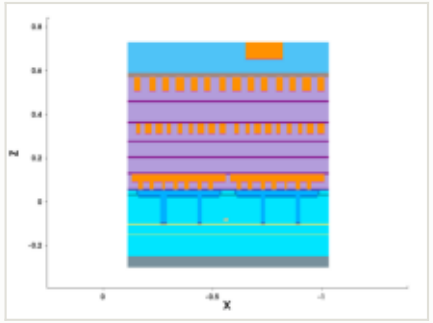

mask for this step

no mask for this step

steps by process area

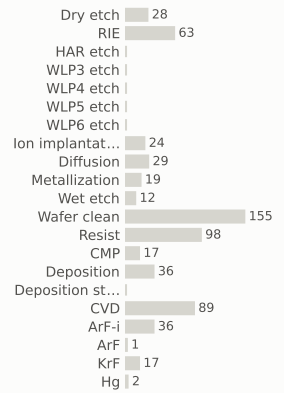

materials deposited (g)

gases emitted (g)

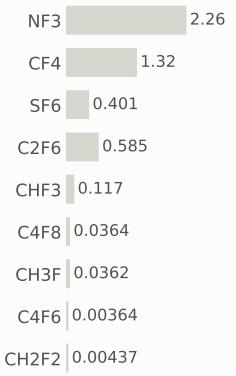

Step #8420: Resist

resist · Resist

0.169	379.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

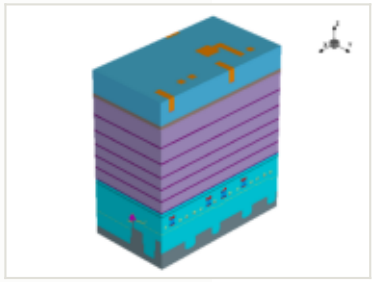

this step

process area	Resist	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

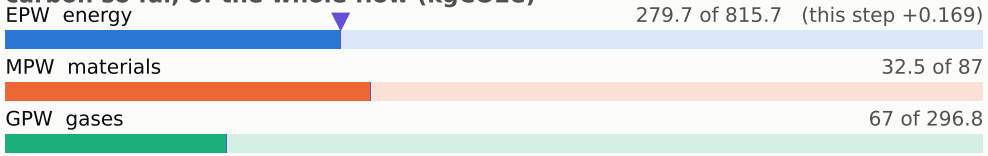

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

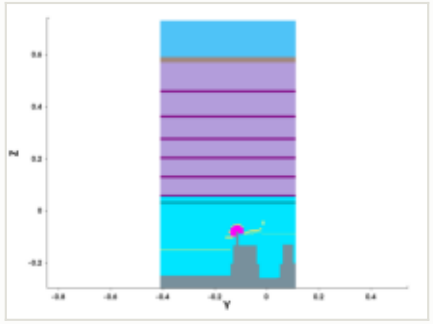

y cut at -0.150 µm

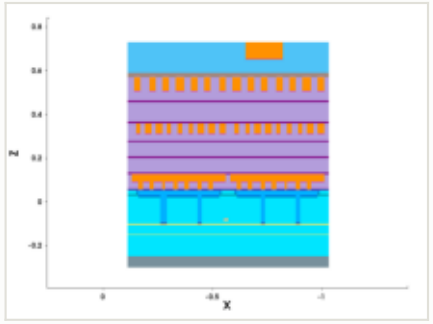

mask for this step

no mask for this step

steps by process area

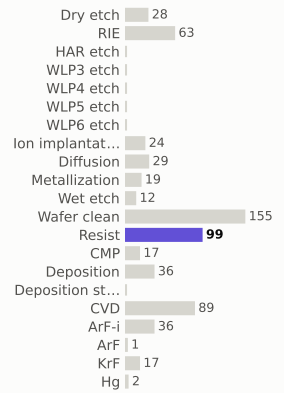

materials deposited (g)

gases emitted (g)

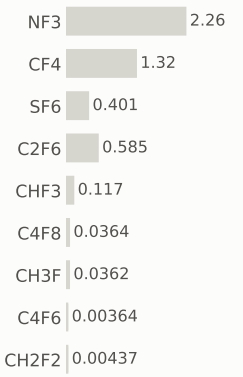

Step #8430: Hg

litho_patterning · Hg

0.199	379.3	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

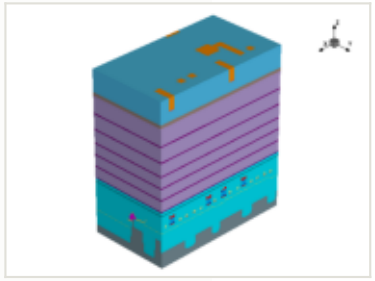

this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

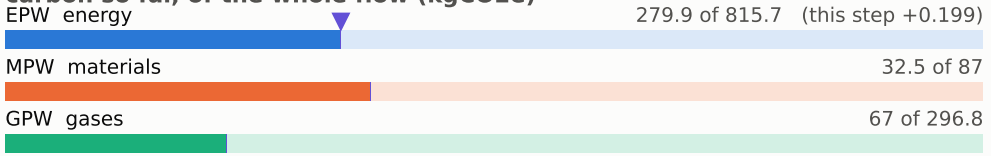

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

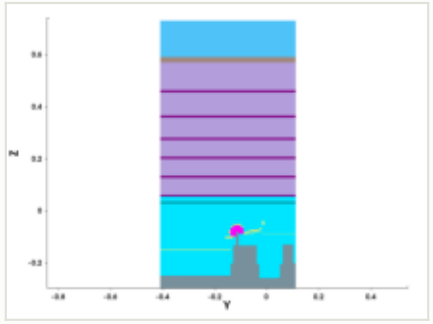

y cut at -0.150 µm

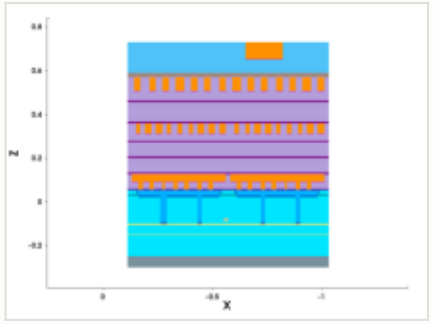

mask: layer 2900:0, positive (GDSII)

steps by process area

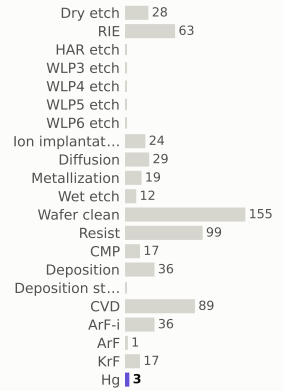

materials deposited (g)

gases emitted (g)

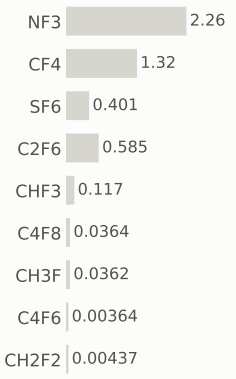

Step #8440: RIE

etch_anisotropic · RIE

1.04	380.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

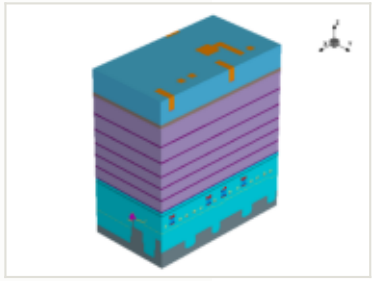

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

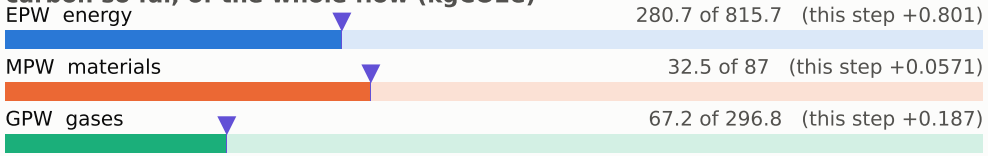

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

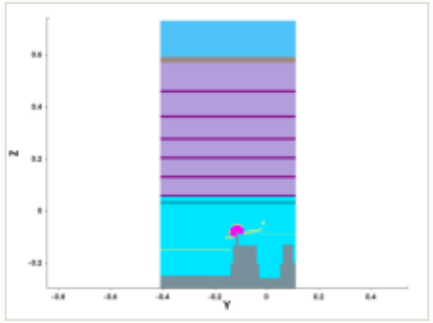

y cut at -0.150 µm

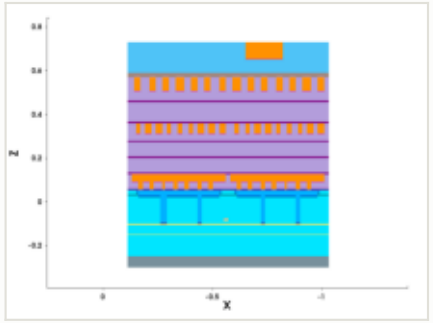

mask for this step

no mask for this step

steps by process area

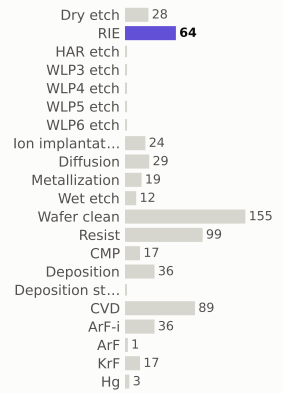

materials deposited (g)

gases emitted (g)

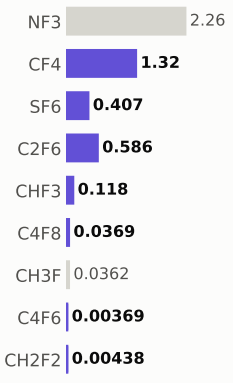

Step #8450: Wafer_clean

clean · Wafer_clean

0.169	380.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

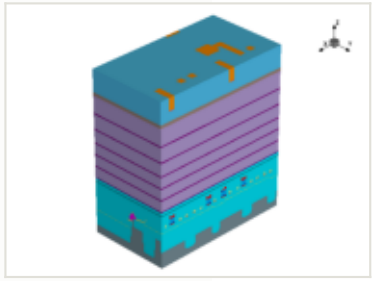

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

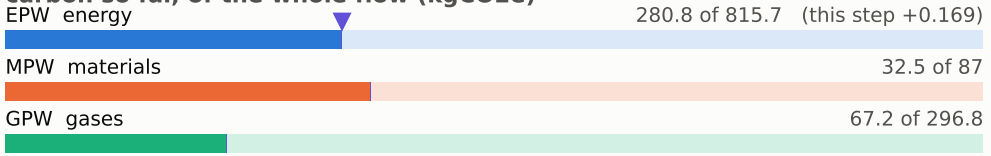

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

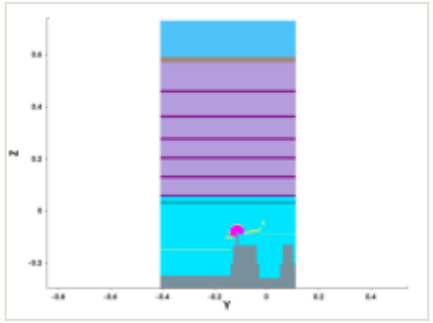

y cut at -0.150 µm

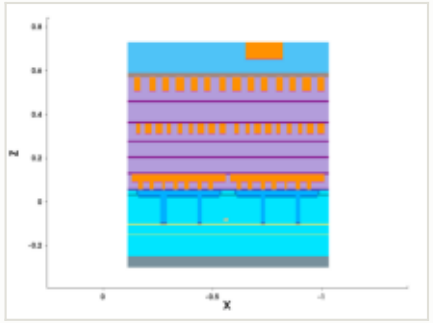

mask for this step

no mask for this step

steps by process area

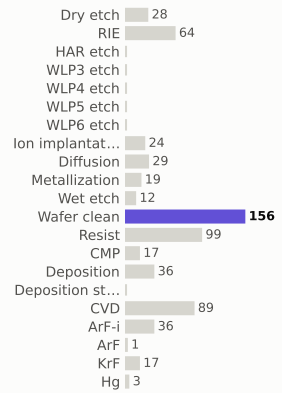

materials deposited (g)

gases emitted (g)

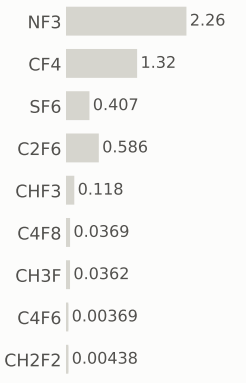

Step #8460: CVD

depo_isotropic · CVD

1.31	381.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

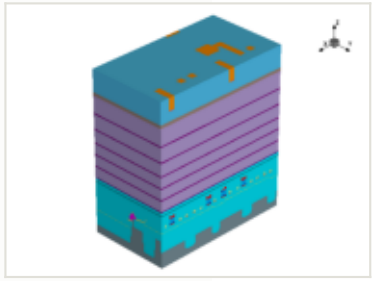

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

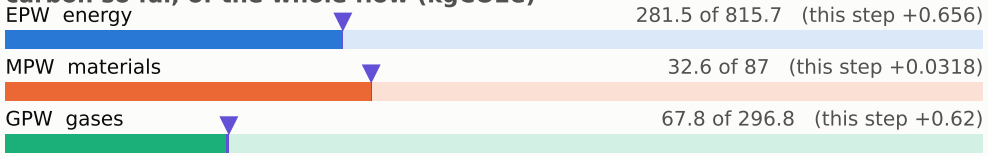

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

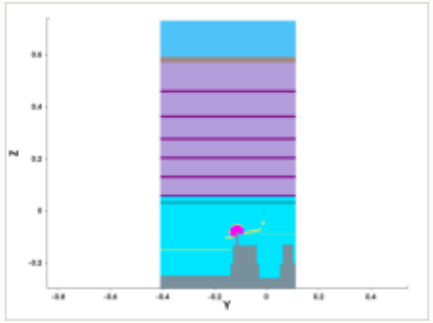

y cut at -0.150 µm

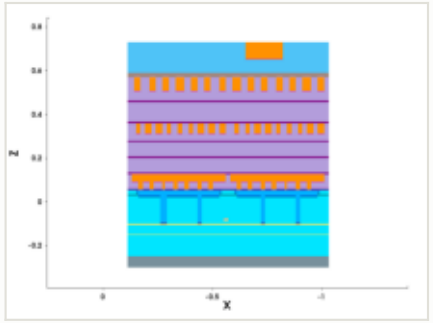

mask for this step

no mask for this step

steps by process area

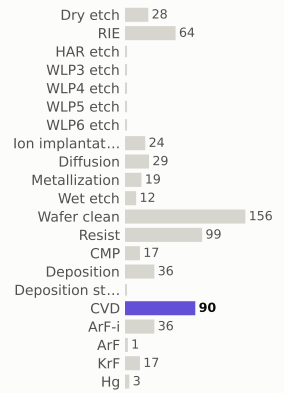

materials deposited (g)

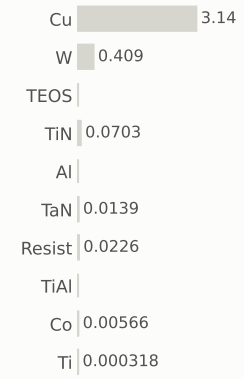

gases emitted (g)

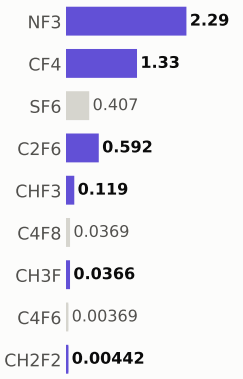

Step #8470: Diffusion

anneal · Diffusion

0.801	382.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

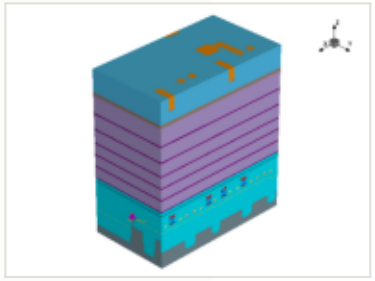

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

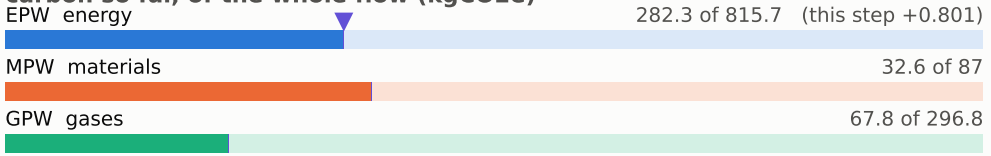

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

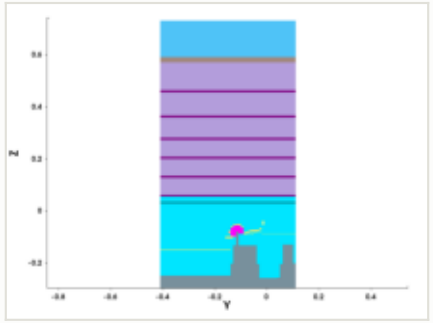

y cut at -0.150 µm

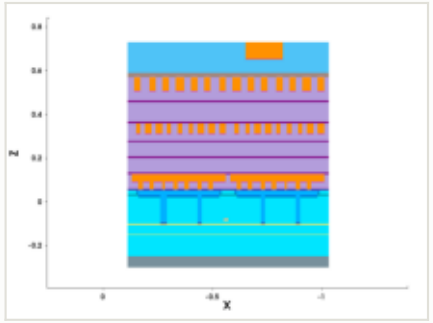

mask for this step

no mask for this step

steps by process area

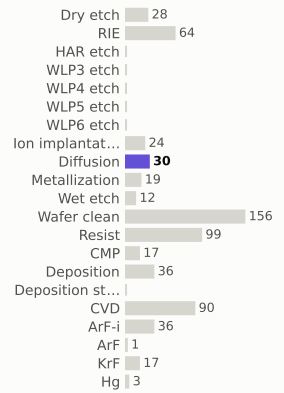

materials deposited (g)

gases emitted (g)

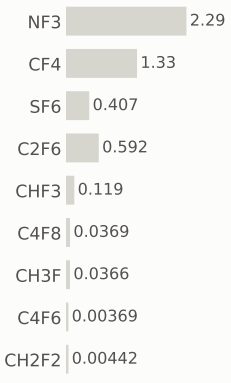

Step #8480: CVD

depo_isotropic · CVD

1.31	384.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

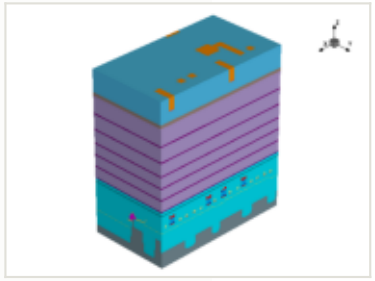

this step

process area	CVD
material	—
thickness	0 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

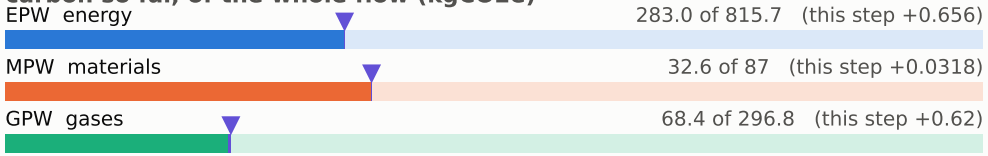

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

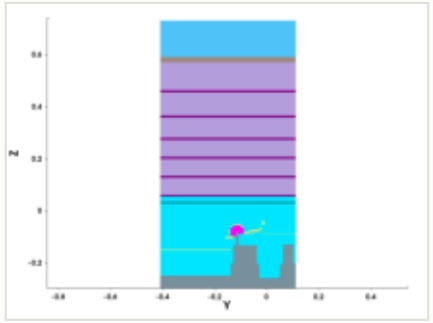

y cut at -0.150 µm

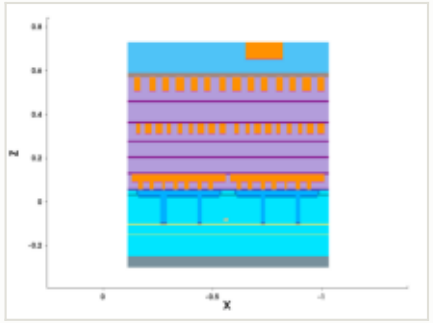

mask for this step

no mask for this step

steps by process area

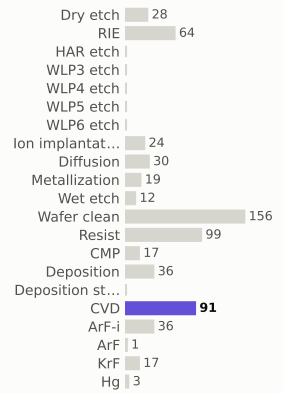

materials deposited (g)

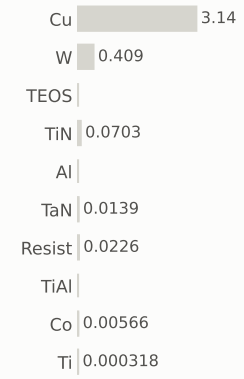

gases emitted (g)

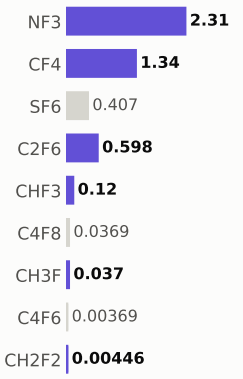

Step #8500: CVD

depo_isotropic · CVD

1.31	385.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

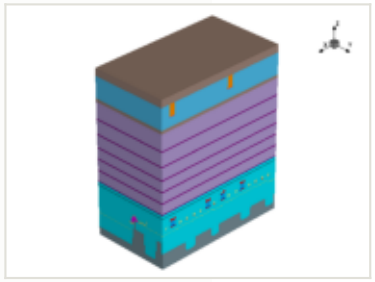

this step

process area	CVD
material	—
thickness	0.05 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

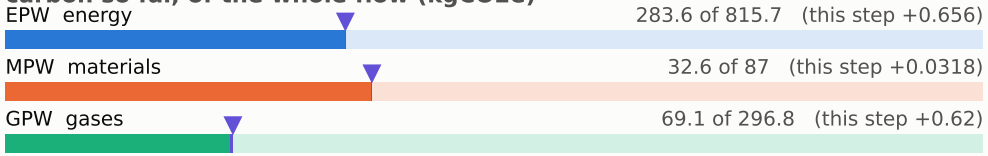

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

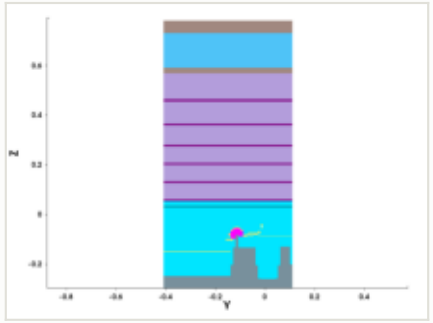

y cut at -0.150 µm

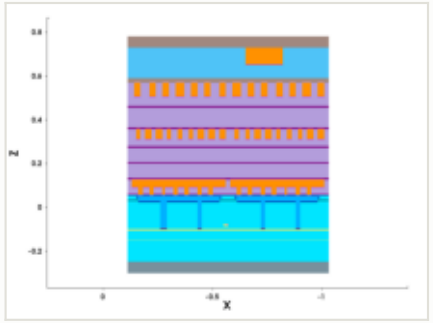

mask for this step

no mask for this step

steps by process area

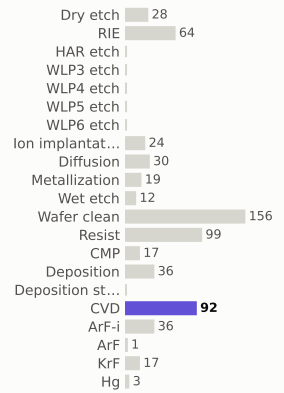

materials deposited (g)

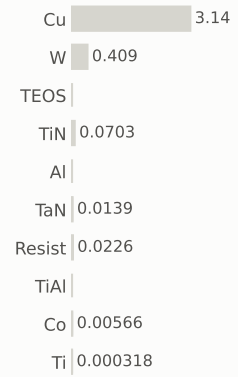

gases emitted (g)

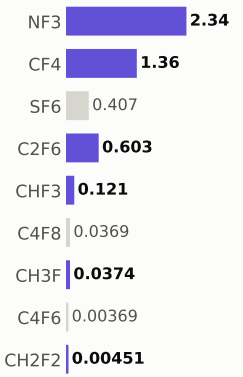

Step #8510: CVD

depo_isotropic · CVD

1.31	386.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

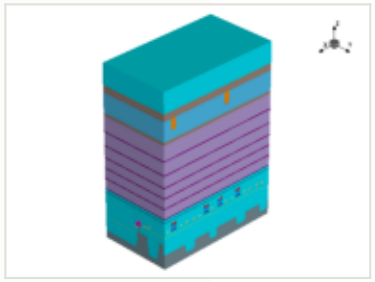

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

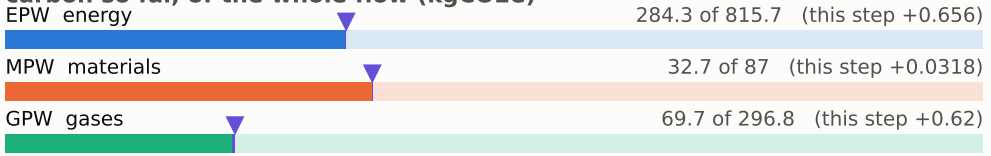

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

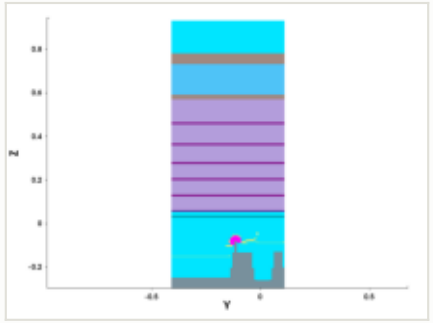

y cut at -0.150 µm

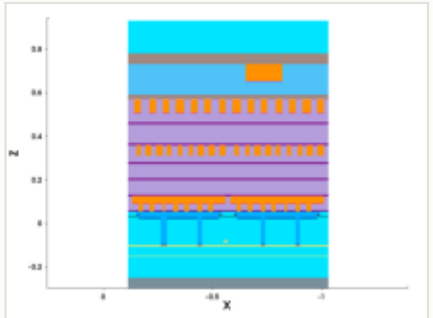

mask for this step

no mask for this step

steps by process area

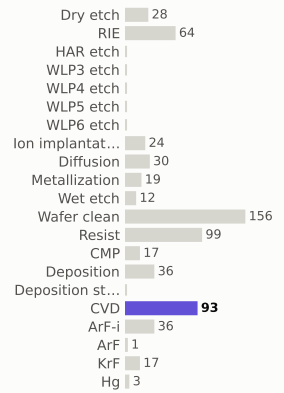

materials deposited (g)

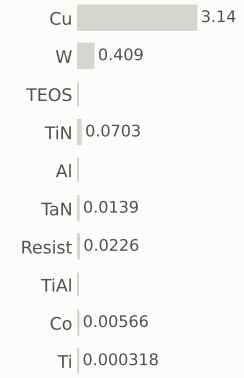

gases emitted (g)

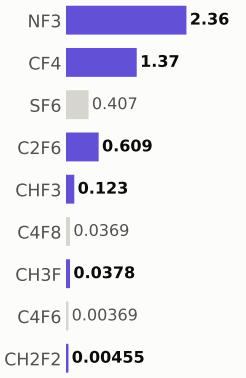

Step #8520: ArF

litho_patterning · ArF

0.199	386.8	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

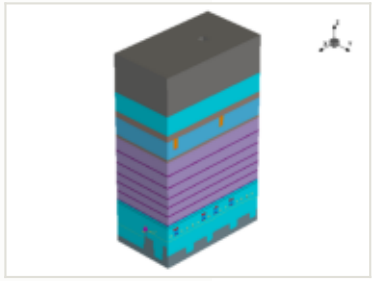

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

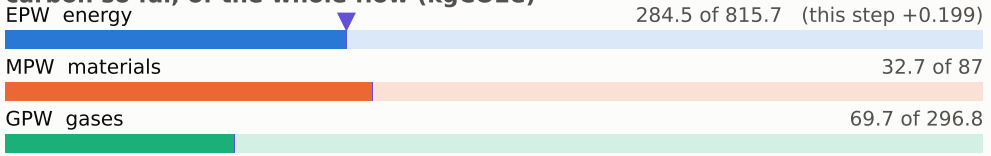

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

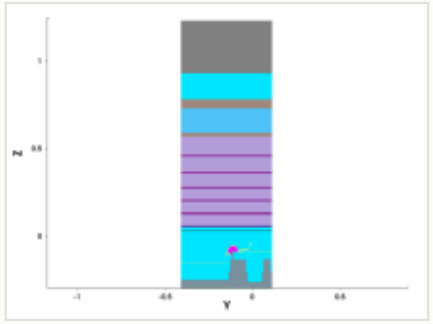

y cut at -0.150 µm

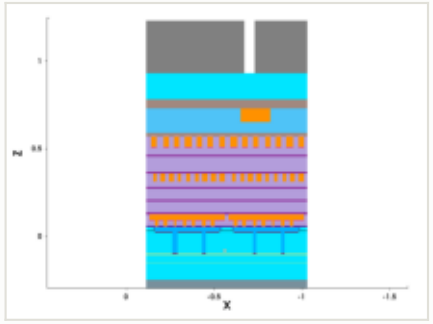

mask: layer 2905:0, negative (GDSII)



steps by process area

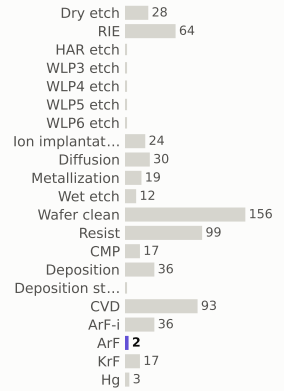

materials deposited (g)

gases emitted (g)

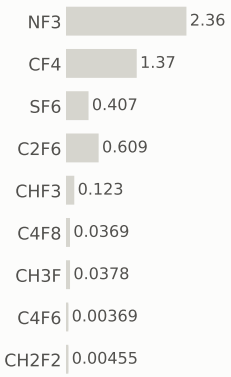

Step #8530: RIE

etch_anisotropic · RIE

1.04	387.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

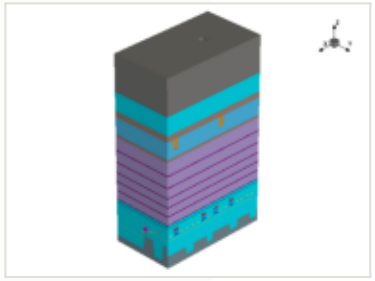

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

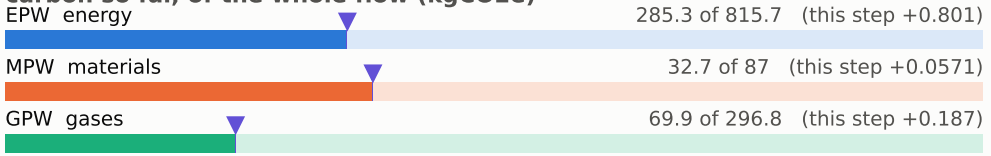

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

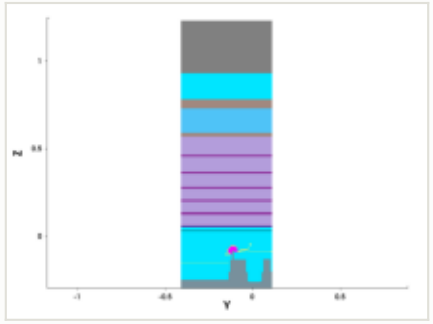

y cut at -0.150 µm

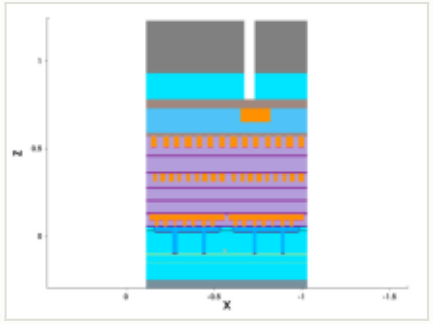

mask for this step

no mask for this step

steps by process area

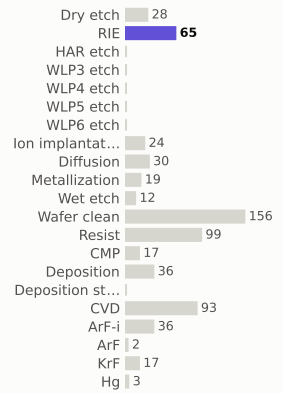

materials deposited (g)

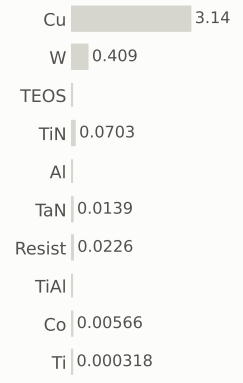

gases emitted (g)

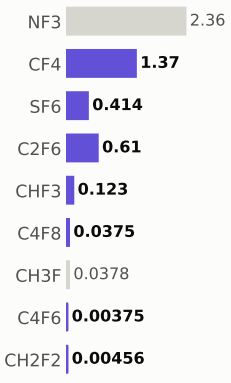

Step #8540: RIE

etch_anisotropic · RIE

1.04	388.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

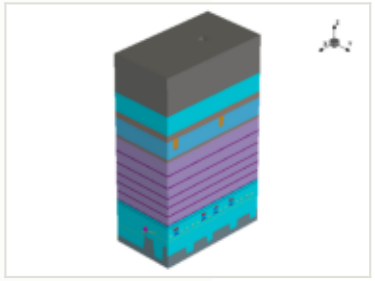

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

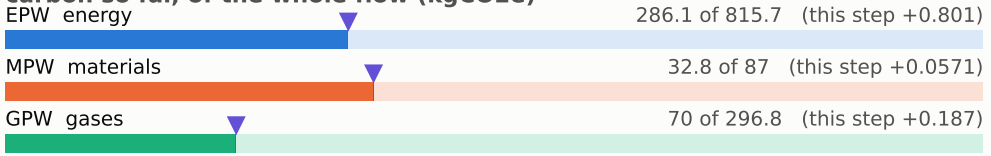

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

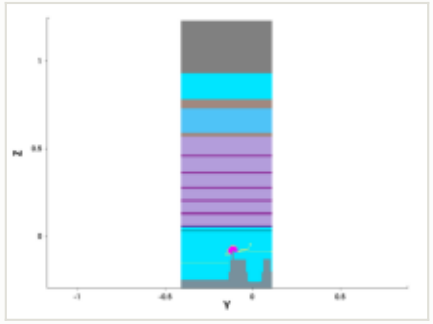

y cut at -0.150 µm

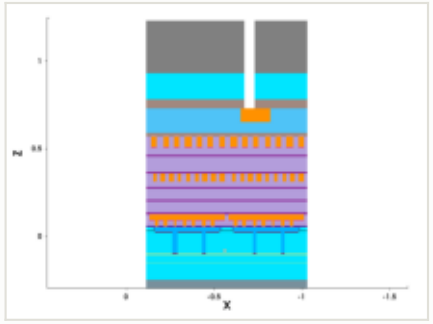

mask for this step

no mask for this step

steps by process area

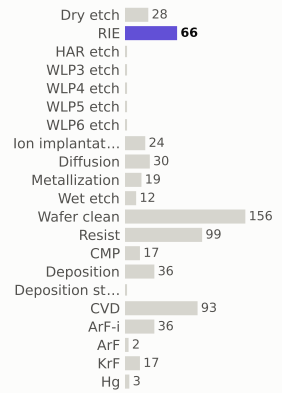

materials deposited (g)

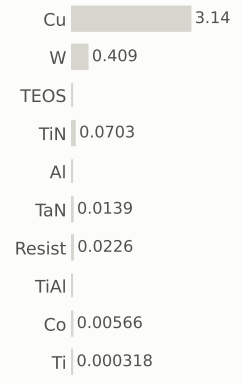

gases emitted (g)

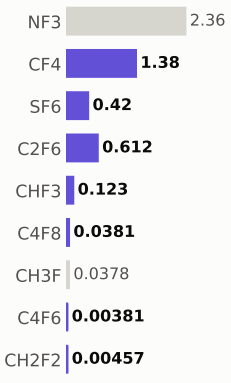

Step #8550: Dry_etch

etch_strip · Dry_etch

0.801	389.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

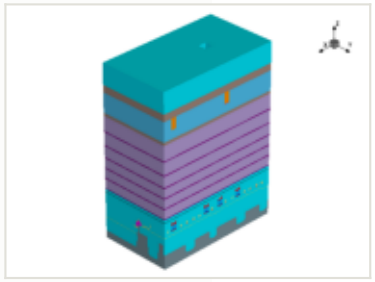

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

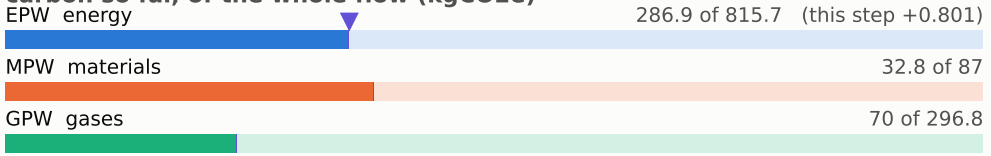

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

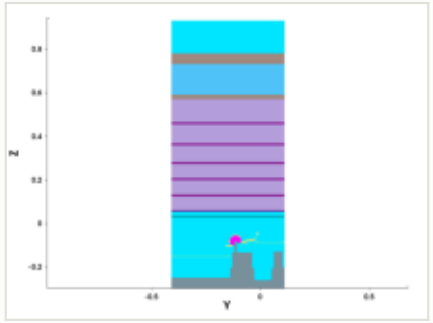

y cut at -0.150 µm

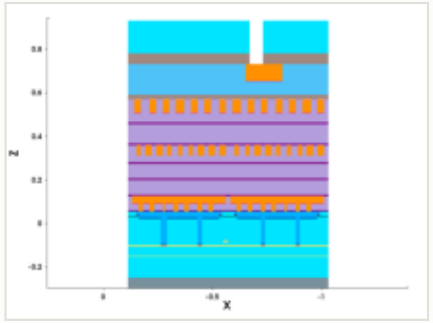

mask for this step

no mask for this step

steps by process area

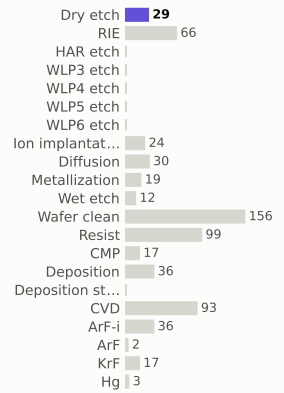

materials deposited (g)

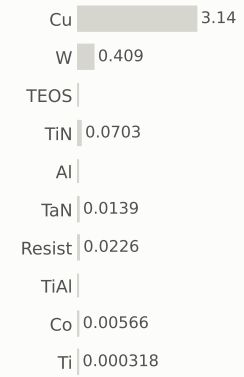

gases emitted (g)

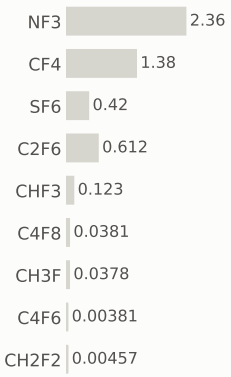

Step #8555: Wafer_clean

clean · Wafer_clean

0.169	389.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

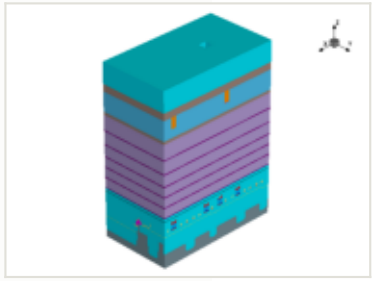

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

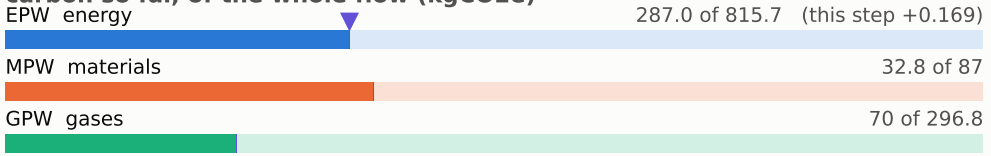

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

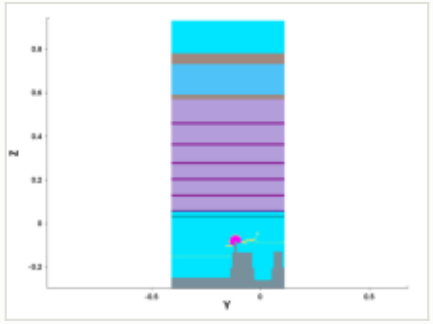

y cut at -0.150 µm

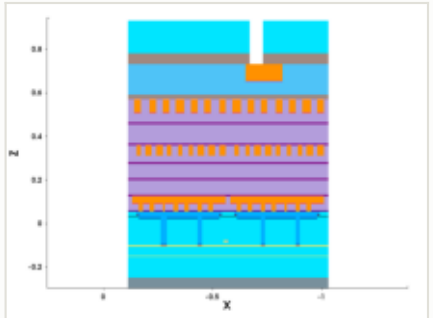

mask for this step

no mask for this step

steps by process area

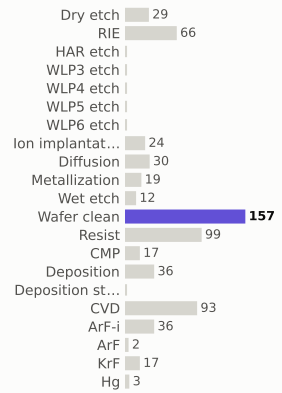

materials deposited (g)

gases emitted (g)

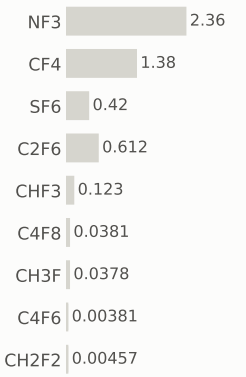

Step #8560: Deposition

depo_isotropic · Deposition

0.656	390.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

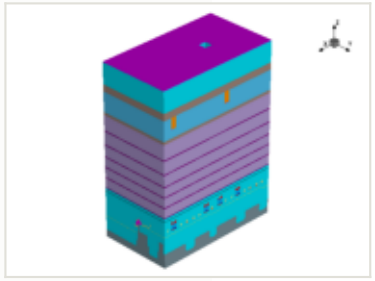

this step

process area	Deposition
material	TaN
thickness	0.003 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	7.50e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

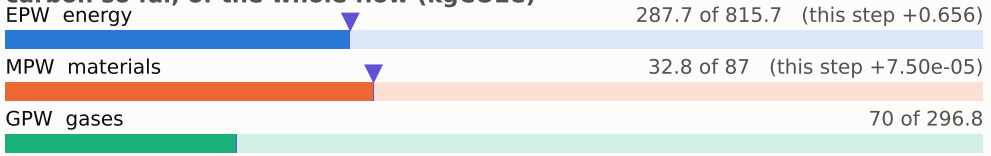

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

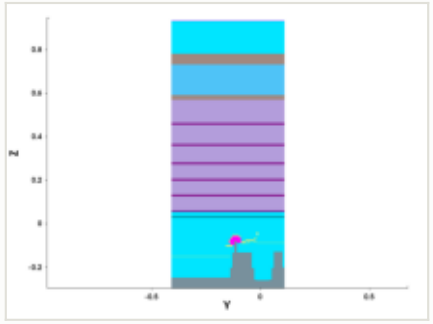

y cut at -0.150 µm

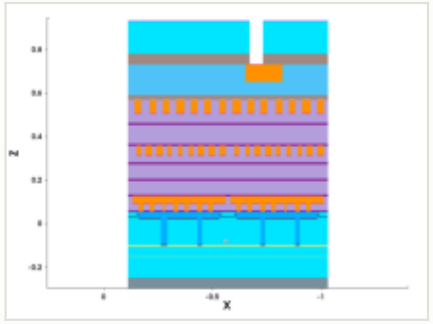

mask for this step

no mask for this step

steps by process area

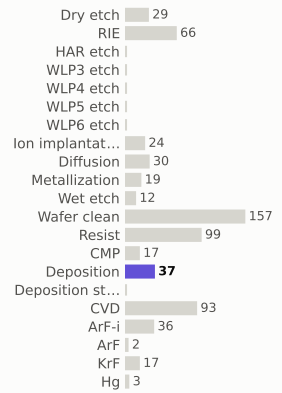

materials deposited (g)

gases emitted (g)

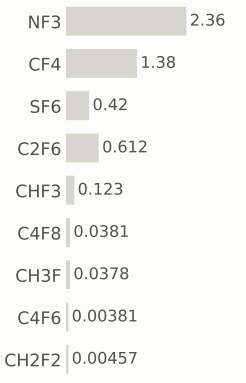

Step #8570: Metallization

depo_isotropic · Metallization

1.2	391.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

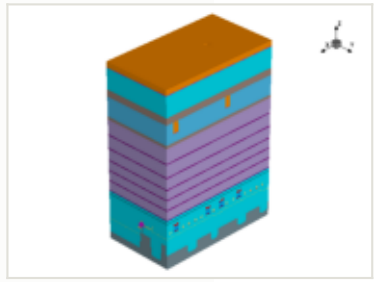

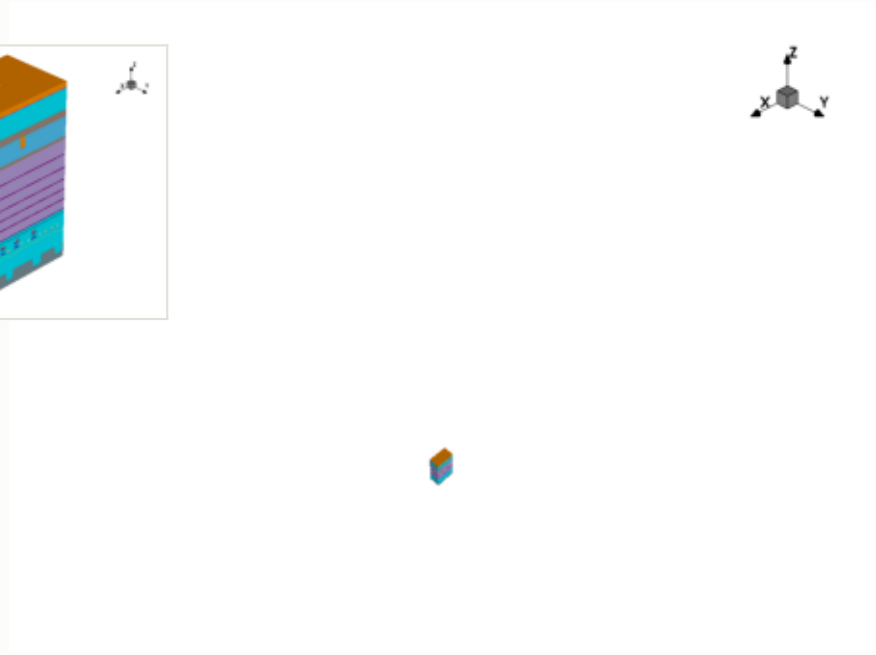

this step

process area	Metallization
material	Cu
thickness	0.04 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.000154 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

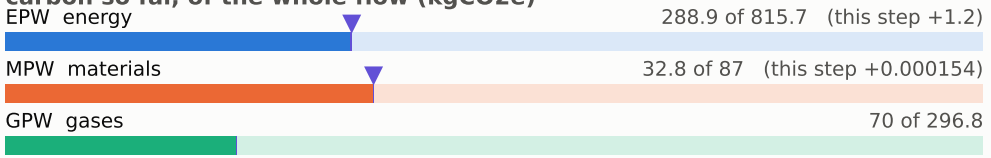

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

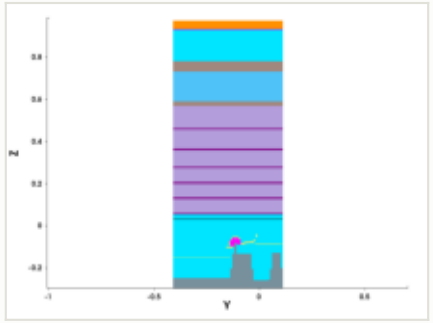

y cut at -0.150 µm

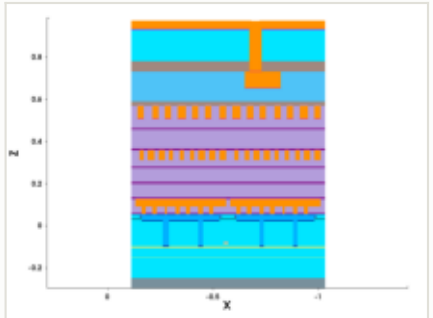

mask for this step

no mask for this step

steps by process area

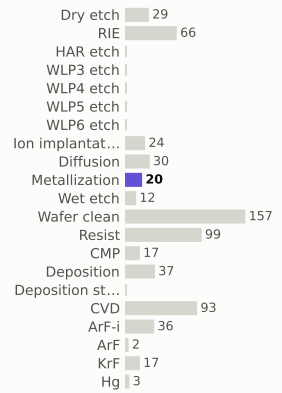

materials deposited (g)

gases emitted (g)

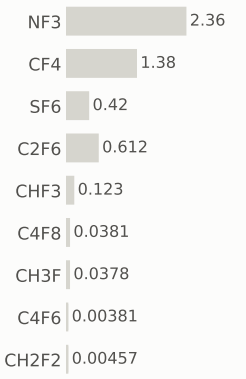

Step #8580: CMP

etch_cmp · CMP

0.169	391.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

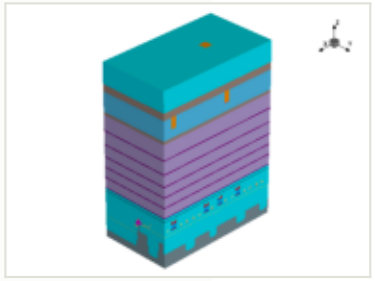

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

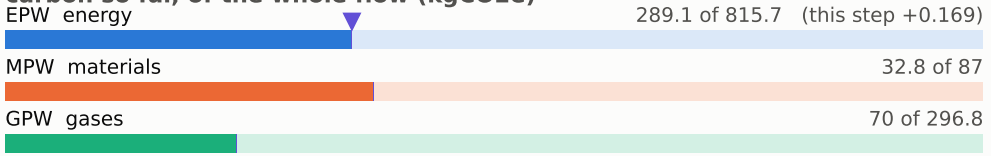

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

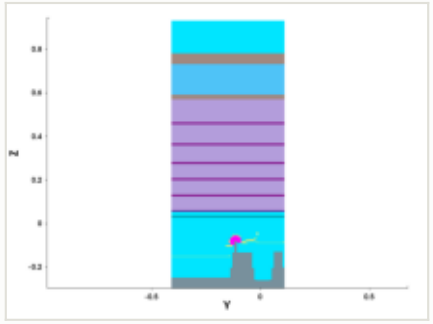

y cut at -0.150 µm

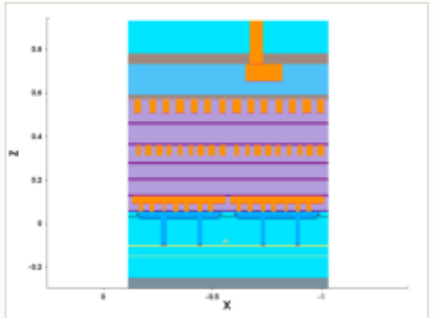

mask for this step

no mask for this step

steps by process area

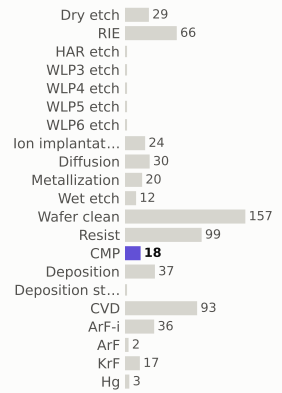

materials deposited (g)

gases emitted (g)

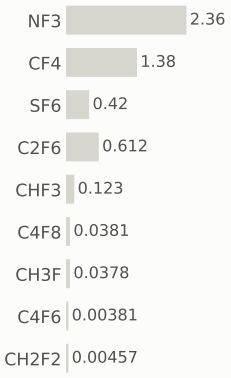

Step #8585: Wafer_clean

clean · Wafer_clean

0.169	392.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

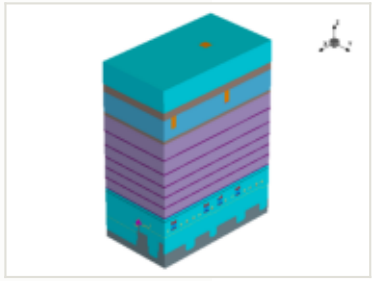

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

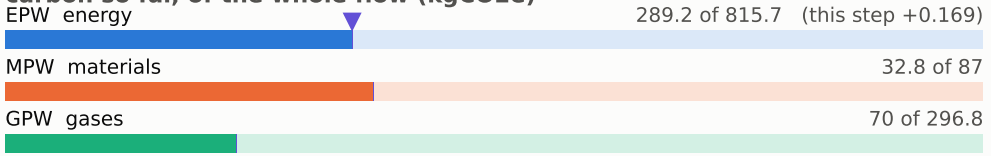

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

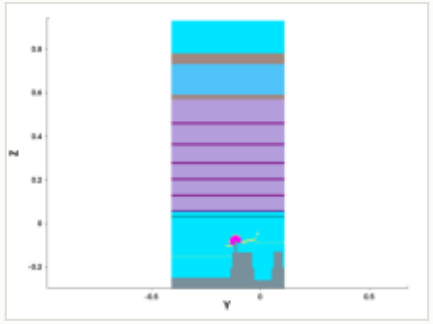

y cut at -0.150 µm

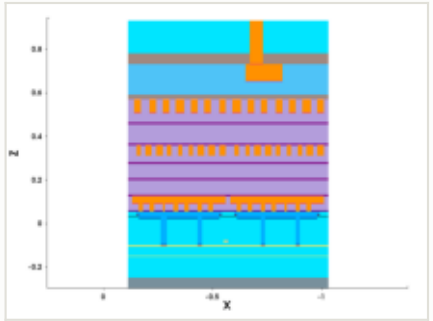

mask for this step

no mask for this step

steps by process area

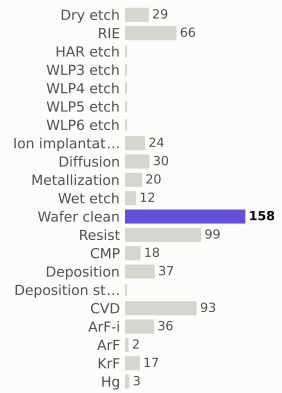

materials deposited (g)

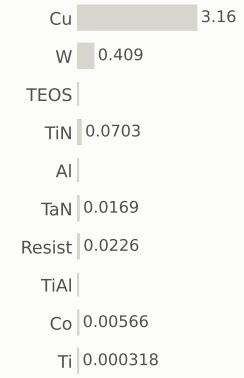

gases emitted (g)

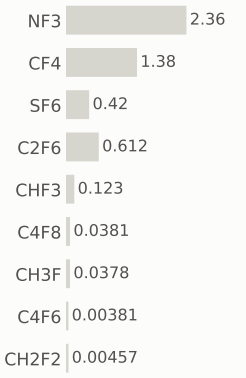

Step #8590: CVD

depo_isotropic · CVD

1.31	393.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

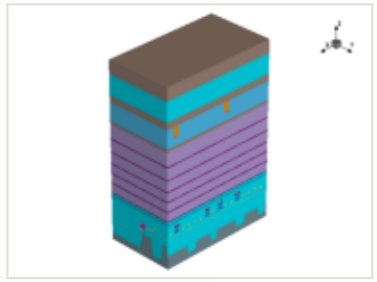

this step

process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

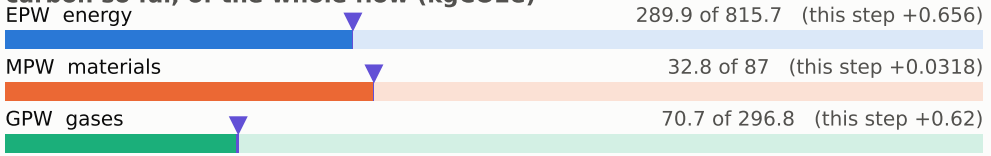

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

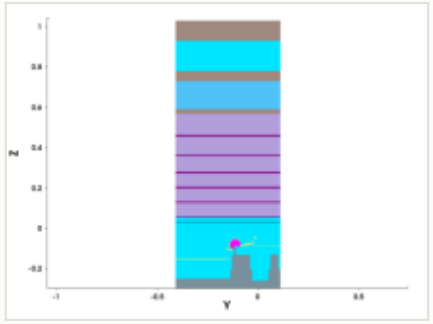

y cut at -0.150 µm

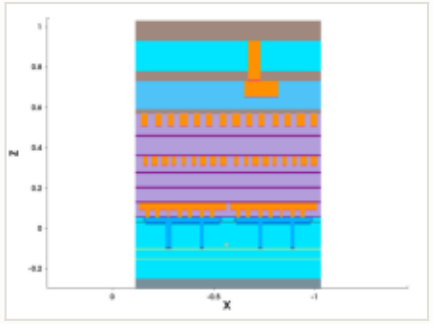

mask for this step

no mask for this step

steps by process area

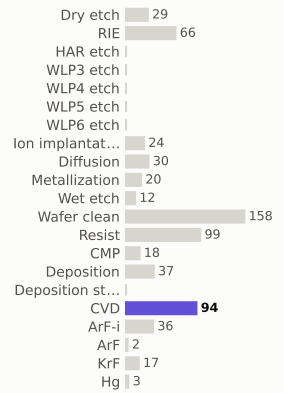

materials deposited (g)

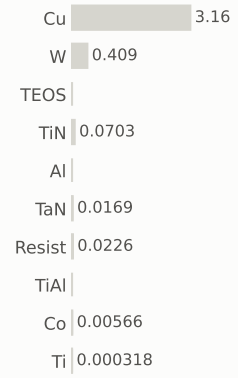

gases emitted (g)

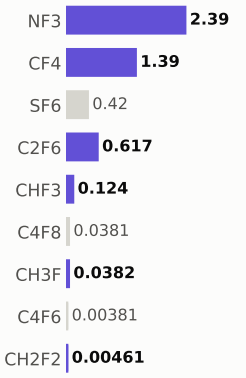

Step #8600: KrF

litho_patterning · KrF

0.199	393.6	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

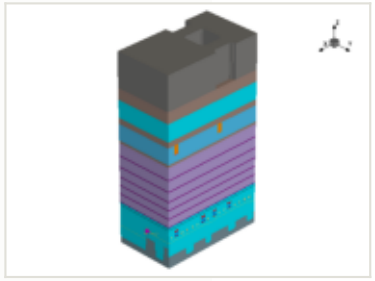

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

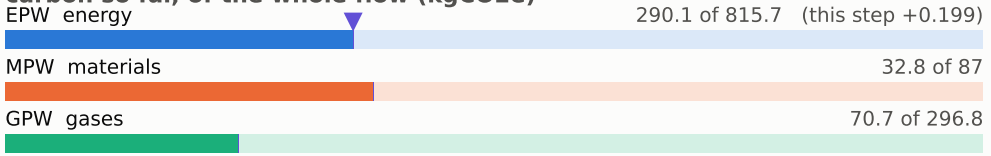

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

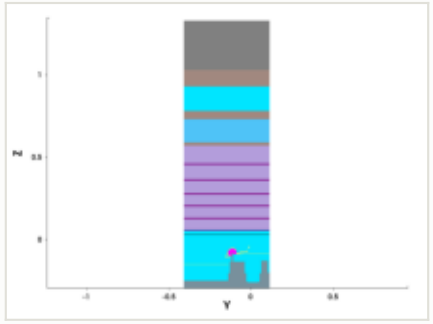

y cut at -0.150 µm

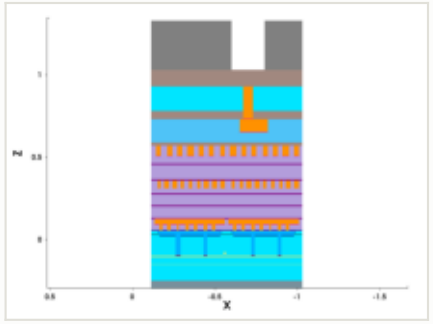

mask: layer 2910:0, negative (GDSII)

steps by process area

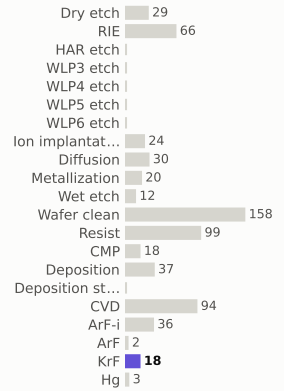

materials deposited (g)

gases emitted (g)

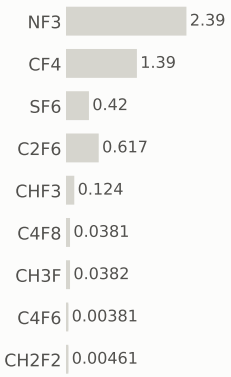

Step #8610: RIE

etch_anisotropic · RIE

1.04	394.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

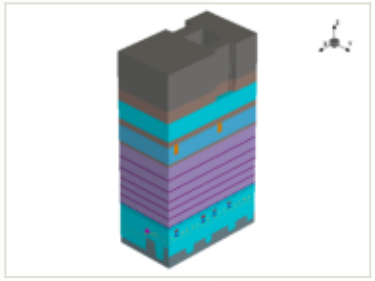

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

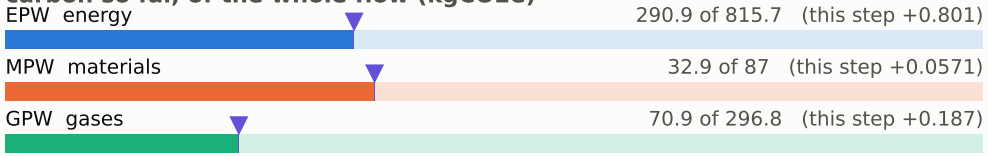

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

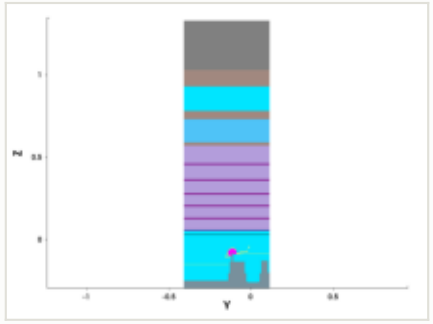

y cut at -0.150 µm

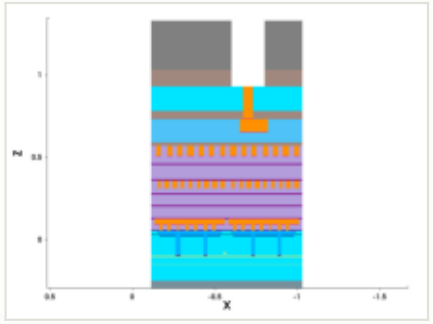

mask for this step

no mask for this step

steps by process area

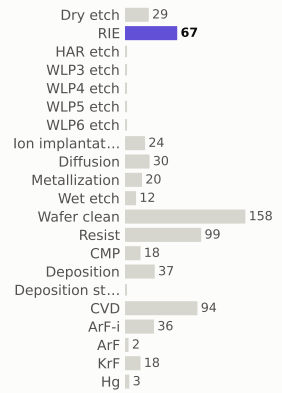

materials deposited (g)

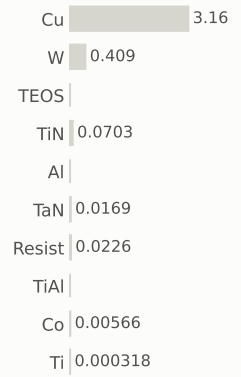

gases emitted (g)

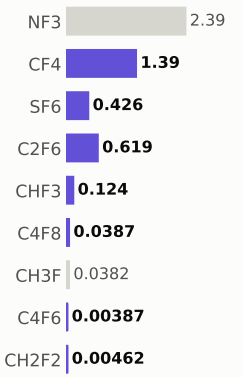

Step #8620: Dry_etch

etch_strip · Dry_etch

0.801	395.4	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

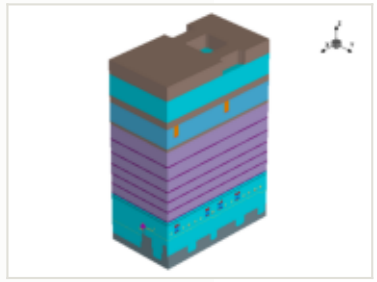

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

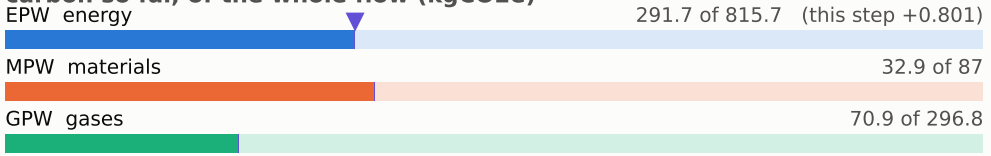

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

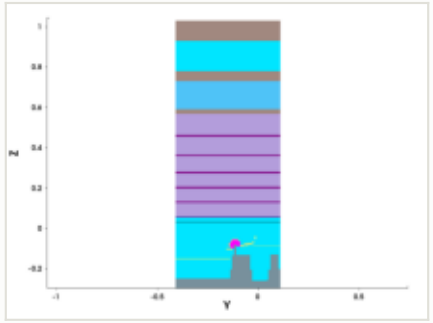

y cut at -0.150 µm

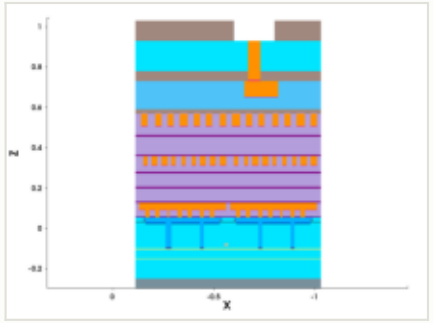

mask for this step

no mask for this step

steps by process area

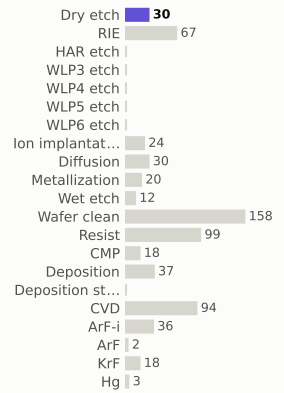

materials deposited (g)

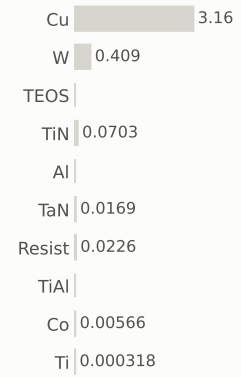

gases emitted (g)

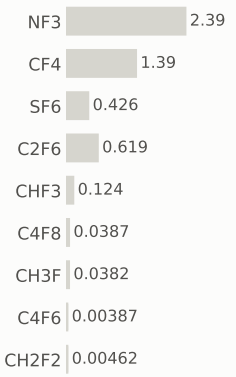

Step #8625: Wafer_clean

clean · Wafer_clean

0.169	395.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

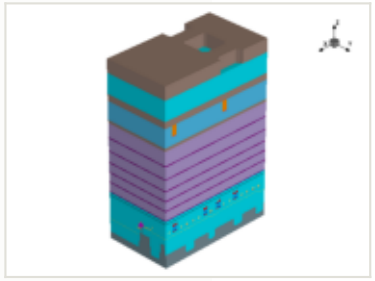

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

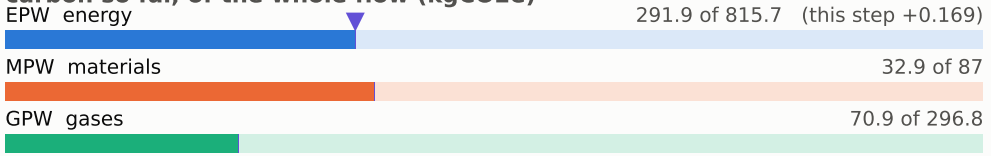

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

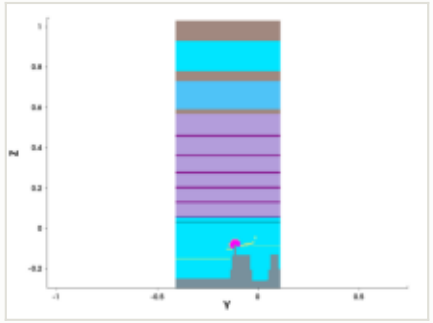

y cut at -0.150 µm

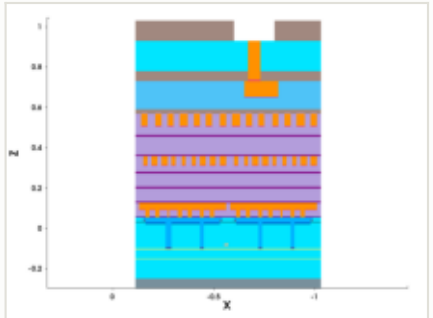

mask for this step

no mask for this step

steps by process area

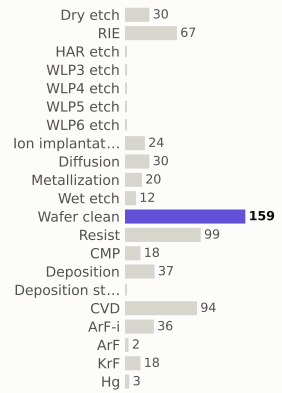

materials deposited (g)

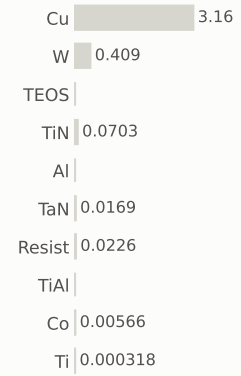

gases emitted (g)

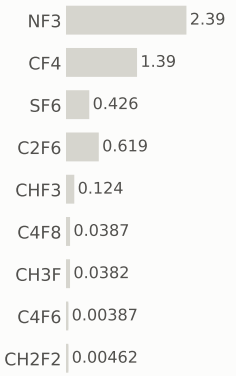

Step #8630: Deposition

depo_isotropic · Deposition

0.656	396.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

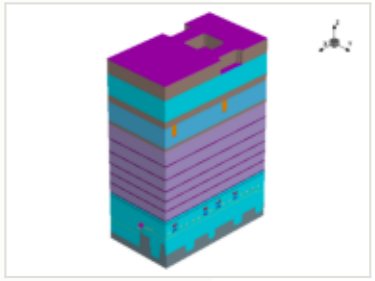

this step

process area	Deposition
material	TaN
thickness	0.005 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000125 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

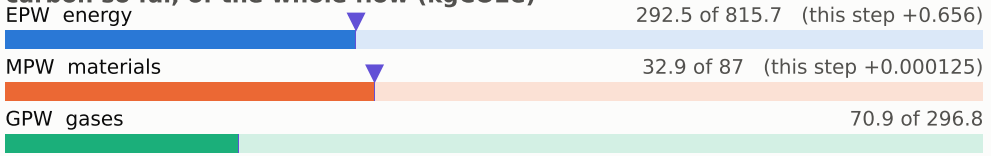

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

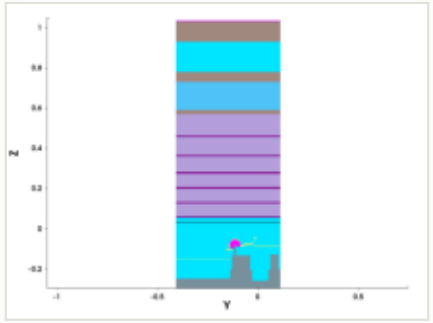

y cut at -0.150 µm

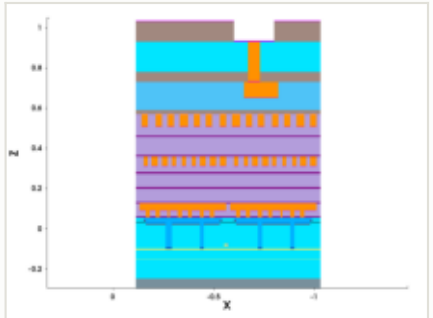

mask for this step

no mask for this step

steps by process area

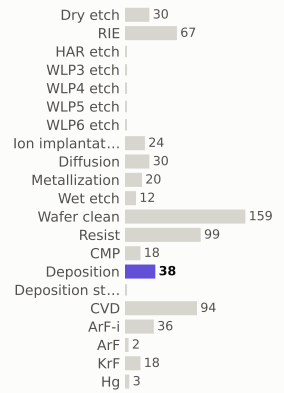

materials deposited (g)

gases emitted (g)

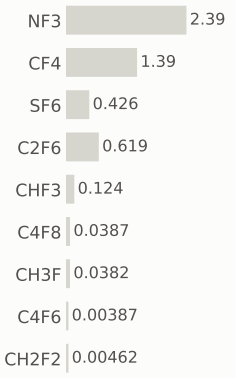

Step #8640: Metallization

depo_isotropic · Metallization

1.2	397.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

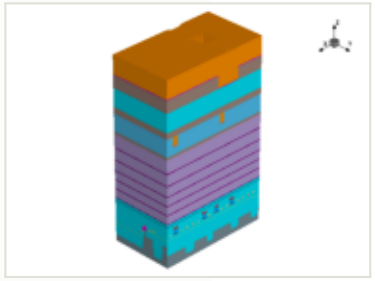

this step

process area	Metallization
material	Cu
thickness	0.15 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.000579 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

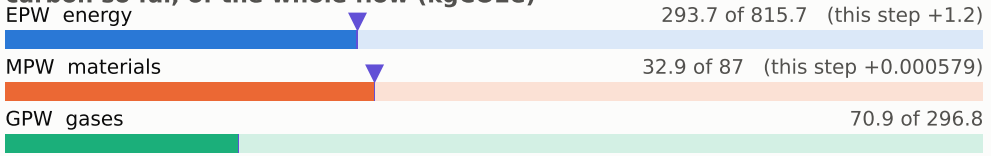

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

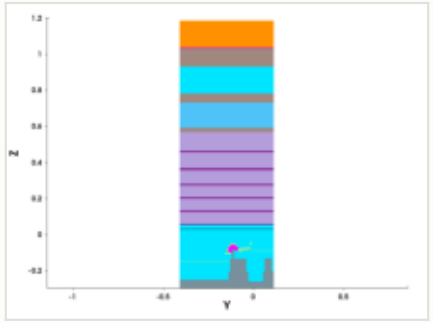

y cut at -0.150 µm

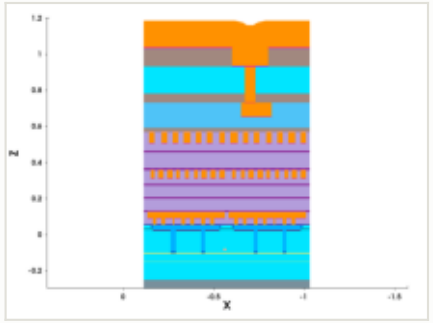

mask for this step

no mask for this step

steps by process area

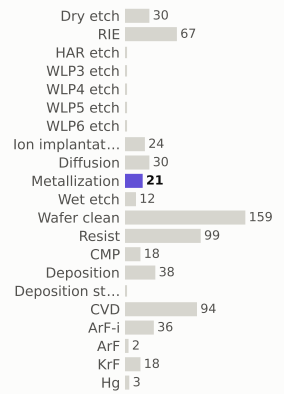

materials deposited (g)

gases emitted (g)

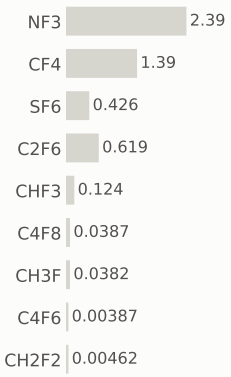

Step #8650: CMP

etch_cmp · CMP

0.169	397.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

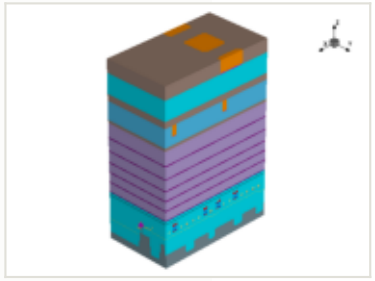

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

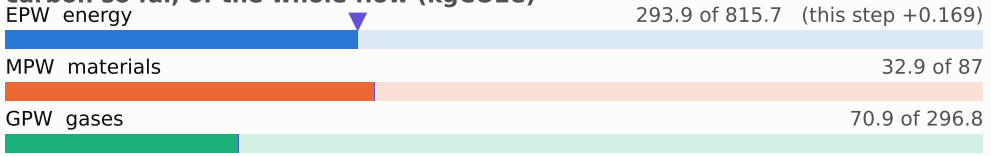

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

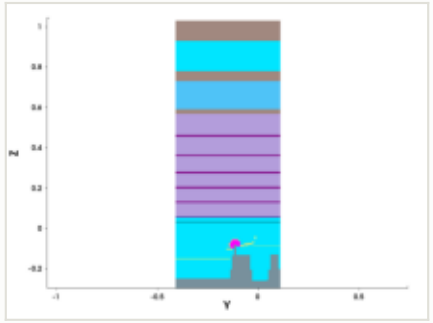

y cut at -0.150 µm

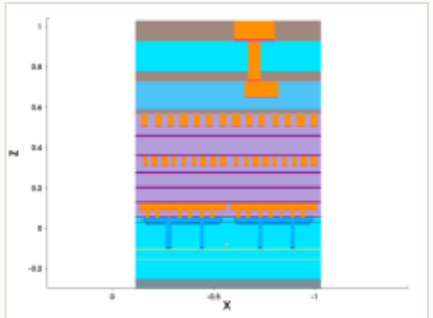

mask for this step

no mask for this step

steps by process area

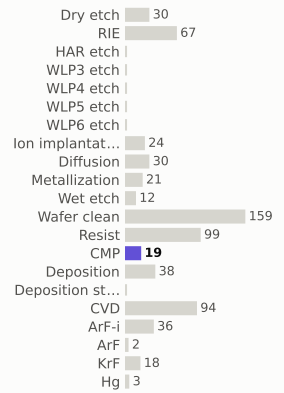

materials deposited (g)

gases emitted (g)

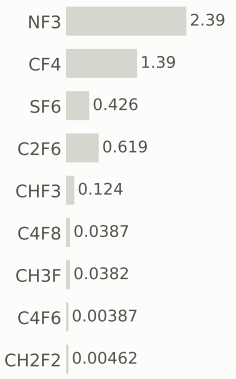

Step #8655: Wafer_clean

clean · Wafer_clean

0.169	397.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

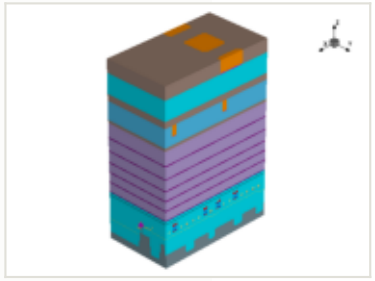

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

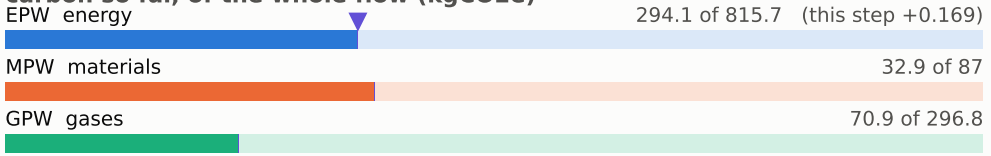

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

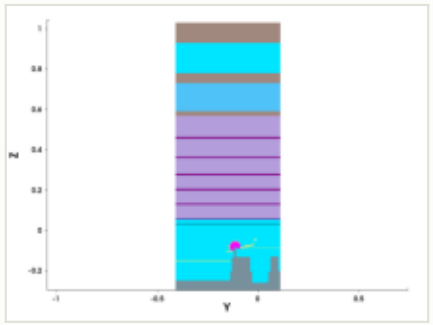

y cut at -0.150 µm

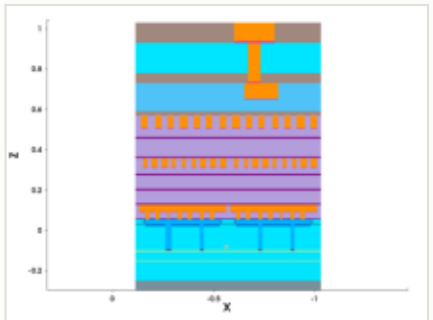

mask for this step

no mask for this step

steps by process area

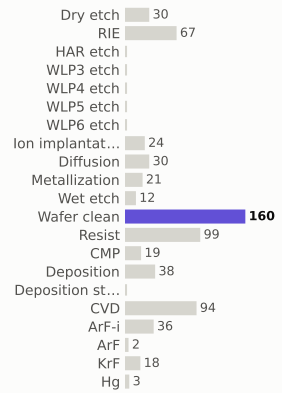

materials deposited (g)

gases emitted (g)

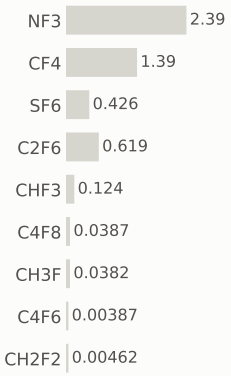

Step #8670: Diffusion

treatment · Diffusion

0.801	398.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

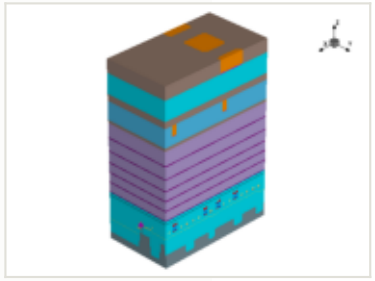

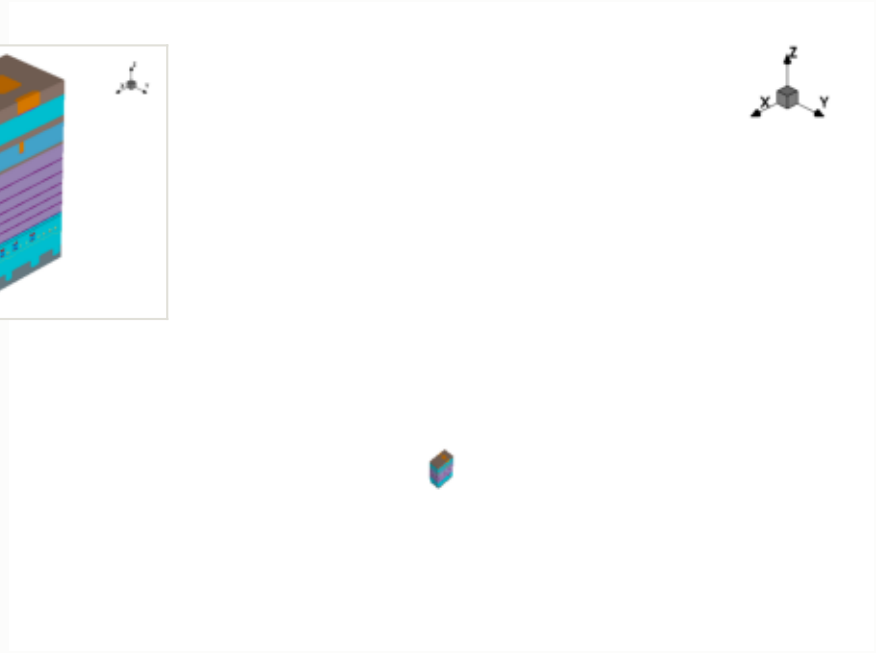

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

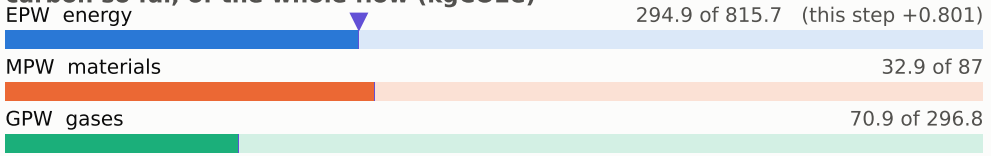

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

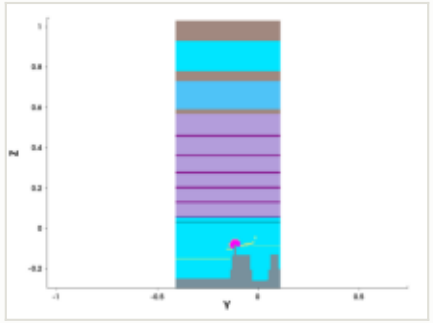

y cut at -0.150 µm

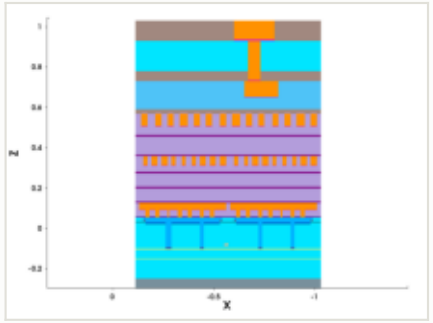

mask for this step

no mask for this step

steps by process area

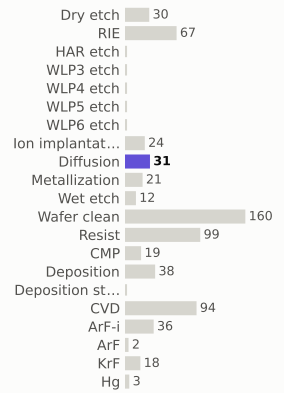

materials deposited (g)

gases emitted (g)

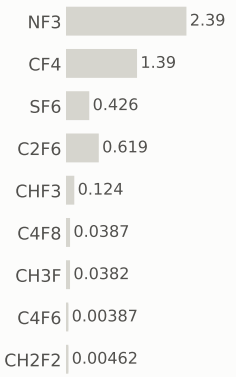

Step #8680: Diffusion

treatment · Diffusion

0.801	399.4	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

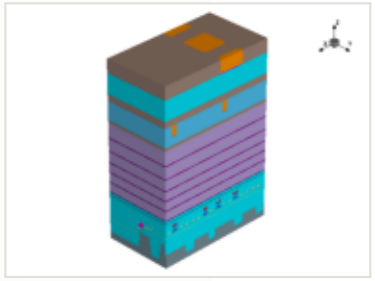

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

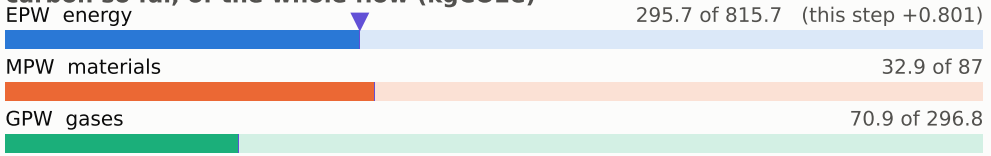

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

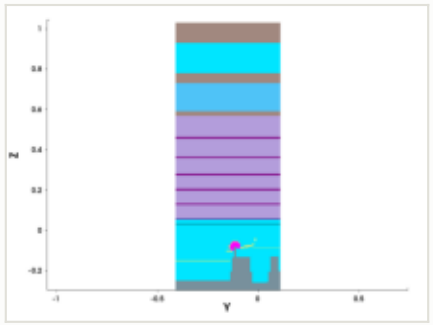

y cut at -0.150 µm

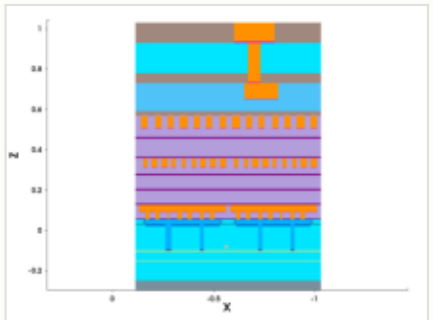

mask for this step

no mask for this step

steps by process area

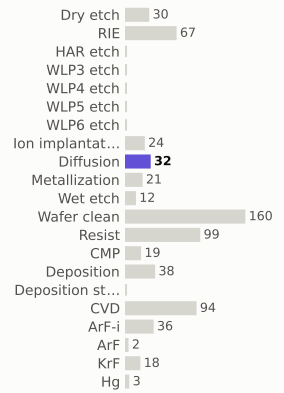

materials deposited (g)

gases emitted (g)

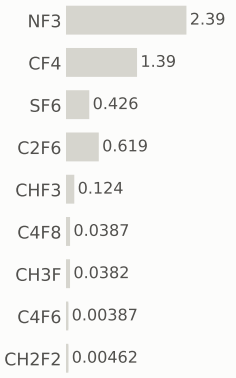

Step #14170: Wafer

substrate · Wafer

26	425.4	2.2%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	26 kgCO2e
GPW	0 kgCO2e
embodied carbon	**26 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

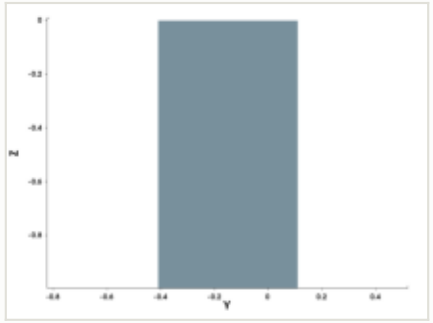

y cut at -0.150 µm

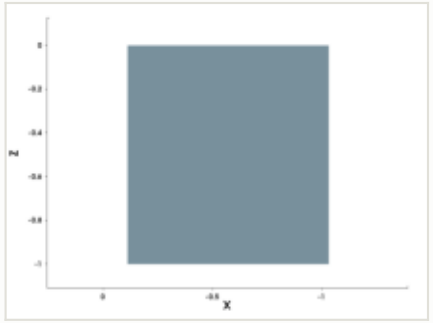

mask for this step

no mask for this step

steps by process area

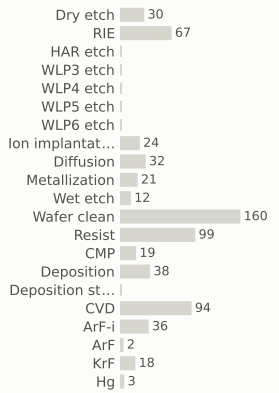

materials deposited (g)

gases emitted (g)

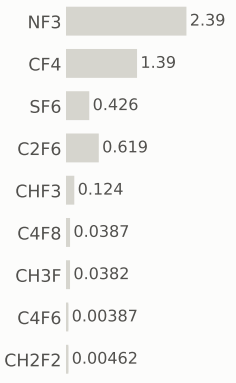

Step #14180: Dry_etch

marking · Dry_etch

0.801	426.2	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

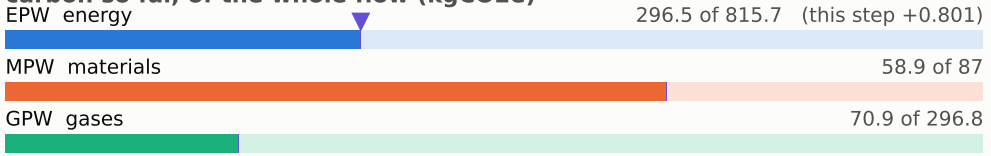

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

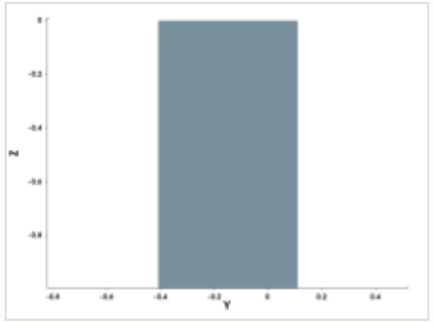

y cut at -0.150 µm

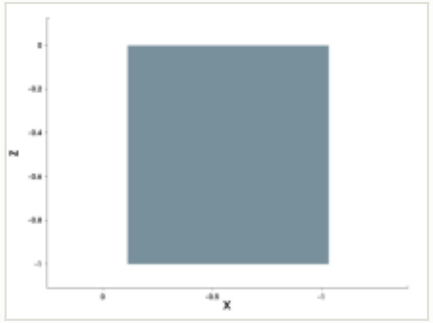

mask for this step

no mask for this step

steps by process area

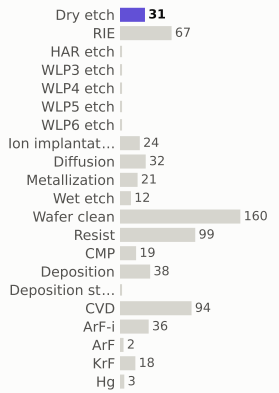

materials deposited (g)

gases emitted (g)

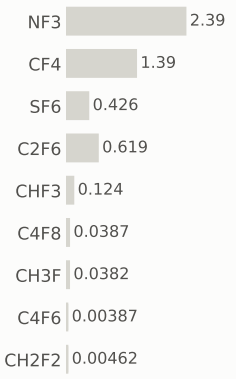

Step #14200: CVD

depo_isotropic · CVD

1.31	427.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.019 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

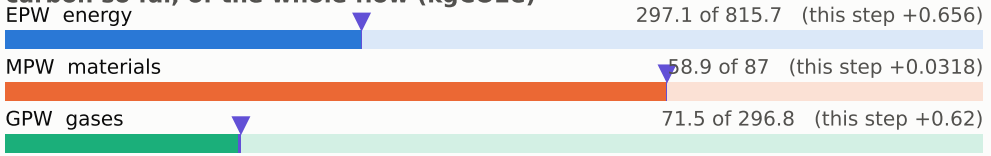

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

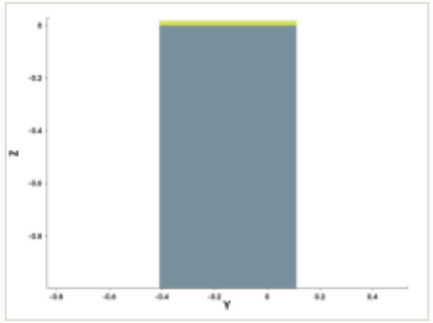

y cut at -0.150 µm

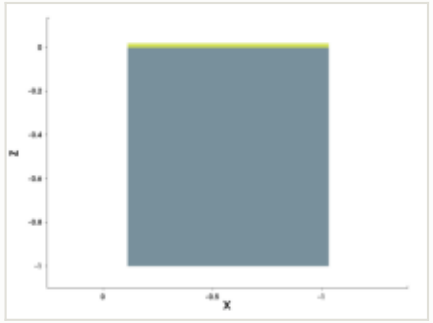

mask for this step

no mask for this step

steps by process area

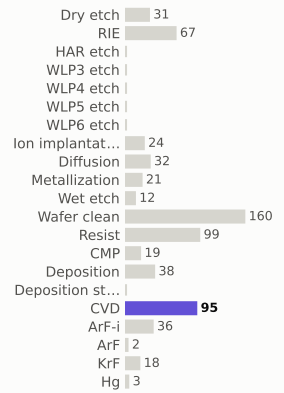

materials deposited (g)

gases emitted (g)

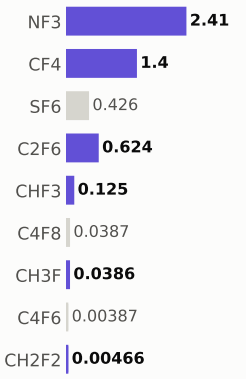

Step #14210: CVD

depo_isotropic · CVD

1.31	428.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

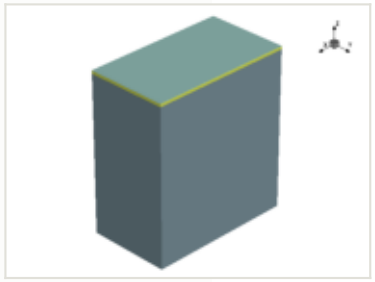

this step

process area	CVD
material	—
thickness	0.002 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

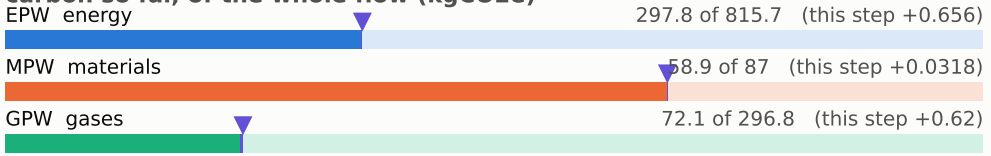

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

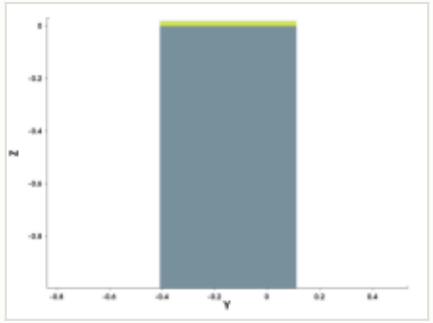

y cut at -0.150 µm

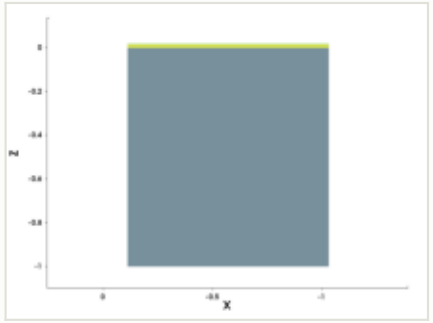

mask for this step

no mask for this step

steps by process area

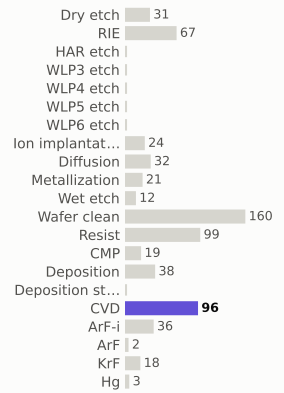

materials deposited (g)

gases emitted (g)

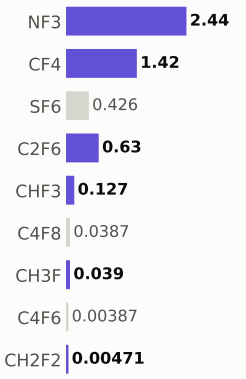

Step #14220: CVD

depo_isotropic · CVD

1.31	430.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.019 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

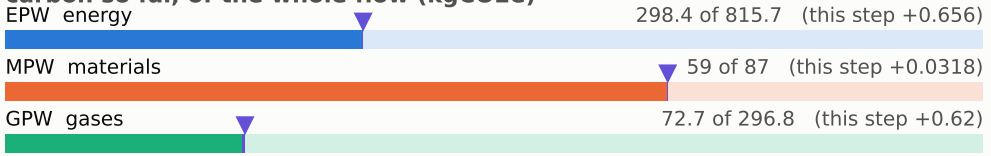

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

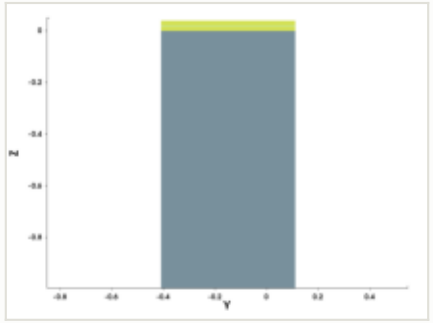

y cut at -0.150 µm

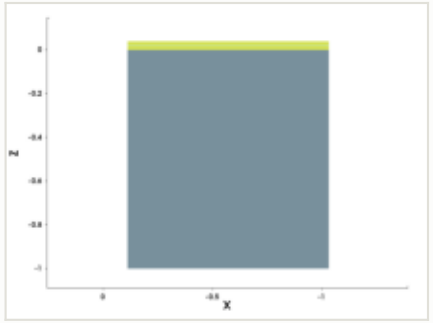

mask for this step

no mask for this step

steps by process area

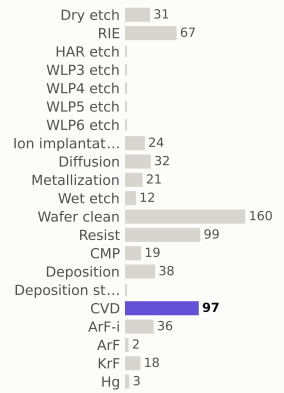

materials deposited (g)

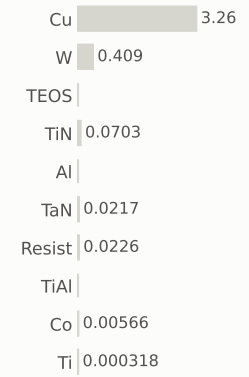

gases emitted (g)

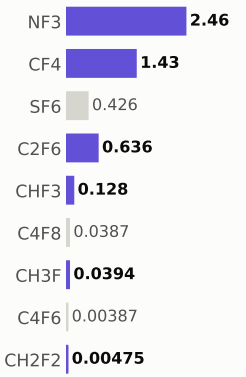

Step #14230: CVD

depo_isotropic · CVD

1.31	431.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

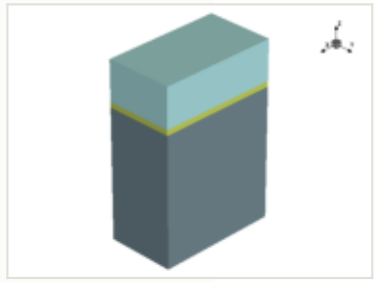

x cut at -0.570 µm

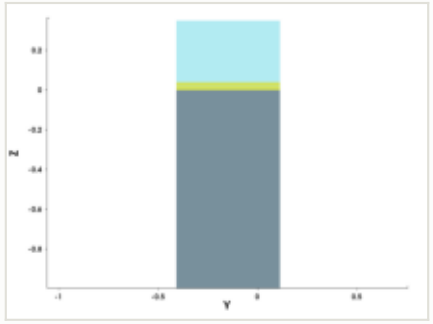

y cut at -0.150 µm

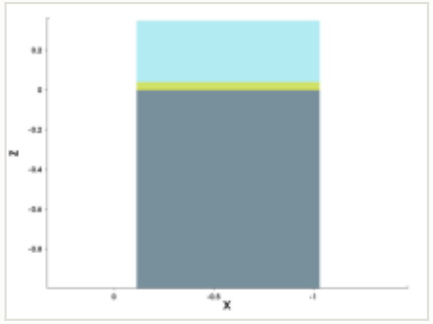

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.31 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

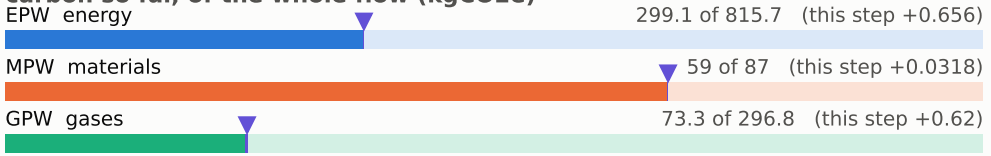

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

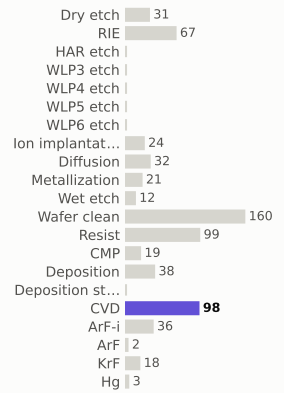

materials deposited (g)

gases emitted (g)

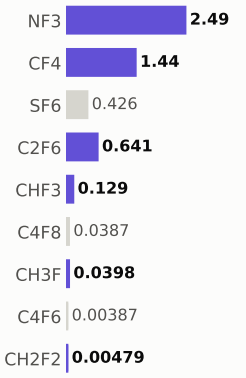

Step #14250: CVD

depo_isotropic · CVD

1.31	432.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

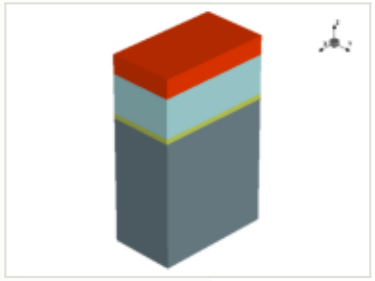

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

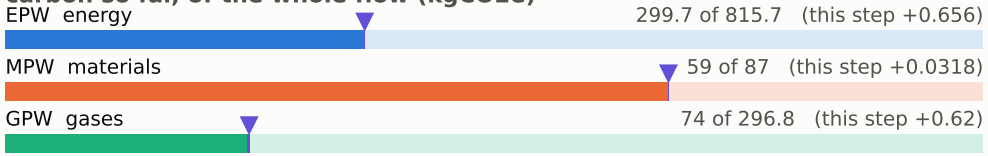

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

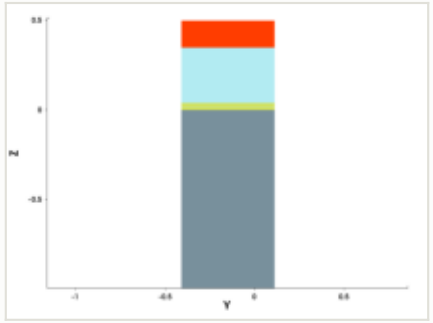

y cut at -0.150 µm

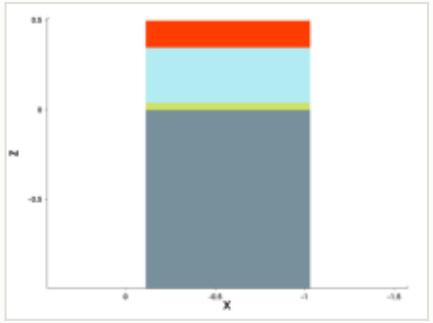

mask for this step

no mask for this step

steps by process area

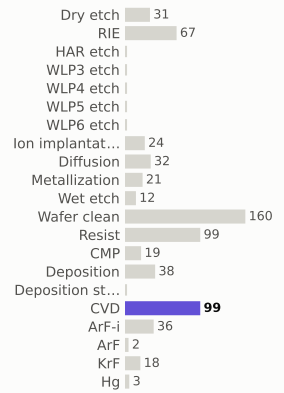

materials deposited (g)

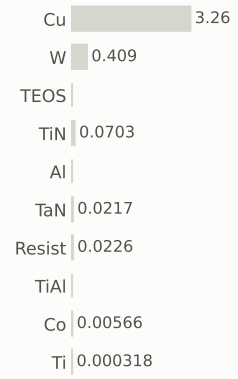

gases emitted (g)

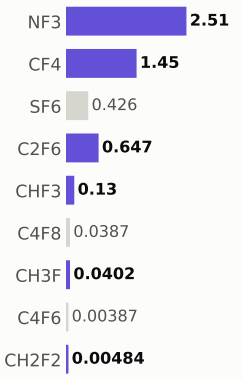

Step #14260: CVD

depo_isotropic · CVD

1.31	434.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

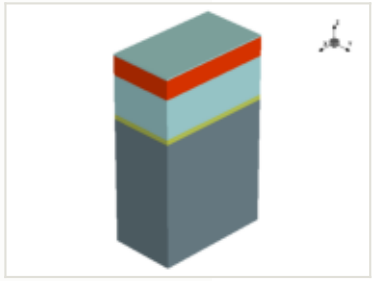

this step

process area	CVD
material	—
thickness	0.012 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

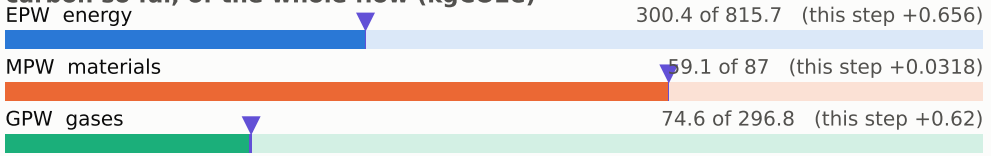

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

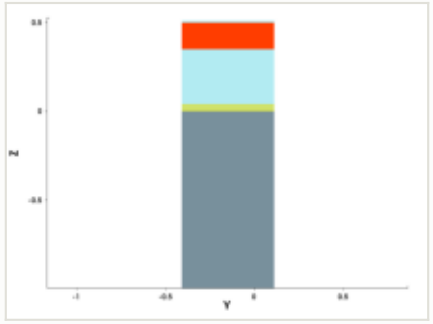

y cut at -0.150 µm

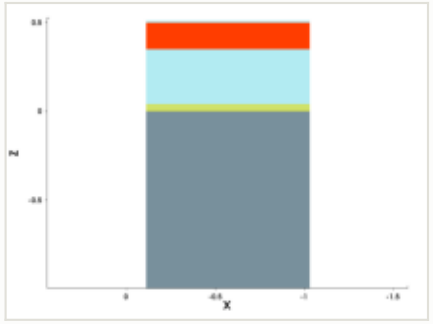

mask for this step

no mask for this step

steps by process area

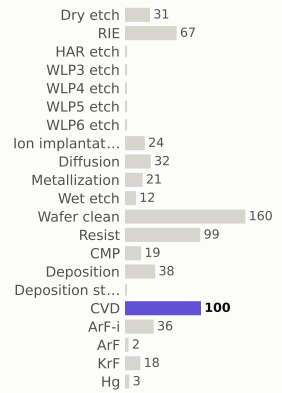

materials deposited (g)

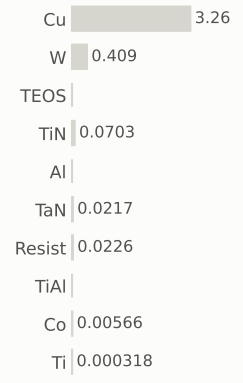

gases emitted (g)

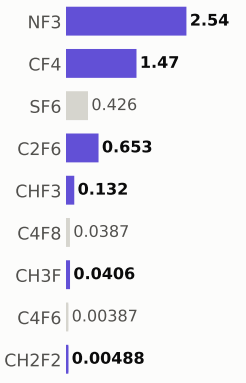

Step #14270: Diffusion

implant_ellipsoid · Diffusion

0.801	434.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

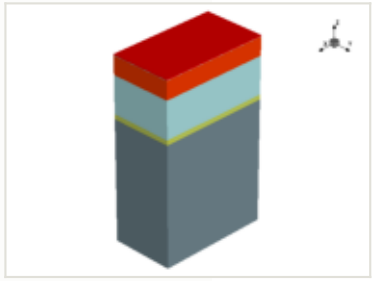

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

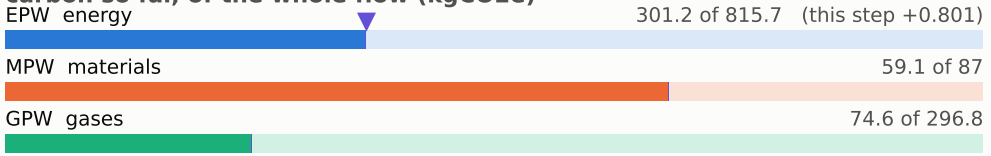

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

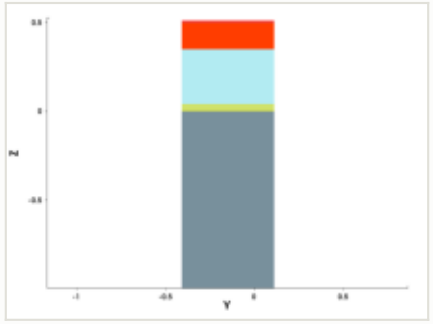

y cut at -0.150 µm

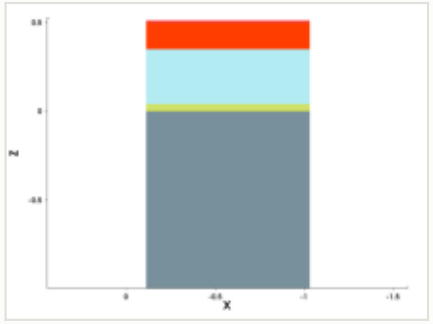

mask for this step

no mask for this step

steps by process area

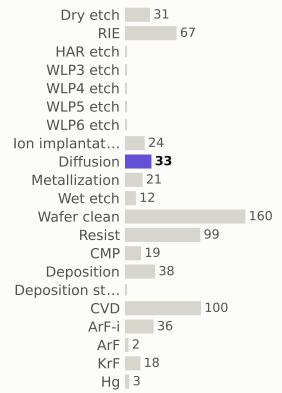

materials deposited (g)

gases emitted (g)

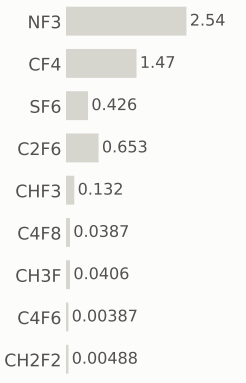

Step #14280: Diffusion

anneal · Diffusion

0.801	435.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

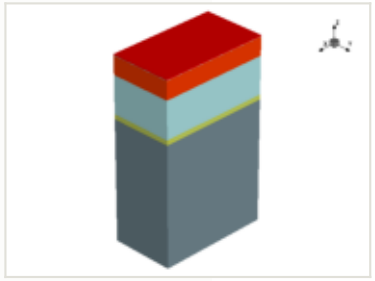

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

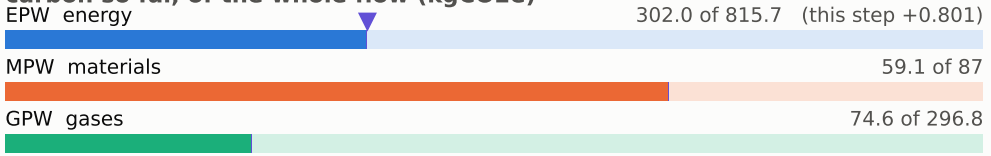

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

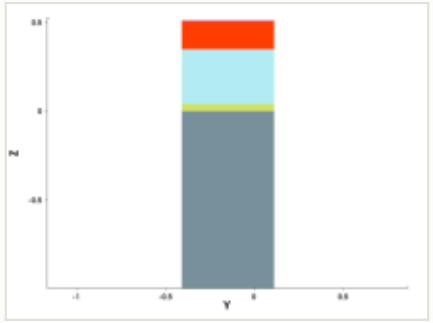

y cut at -0.150 µm

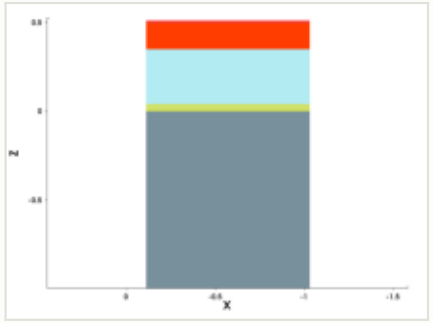

mask for this step

no mask for this step

steps by process area

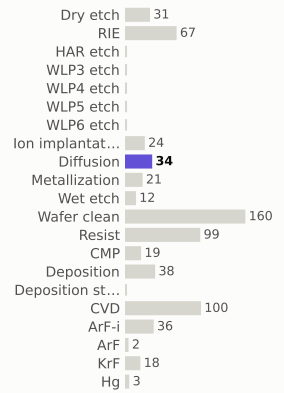

materials deposited (g)

gases emitted (g)

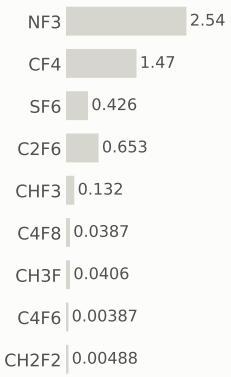

Step #14290: CVD

depo_isotropic · CVD

1.31	436.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

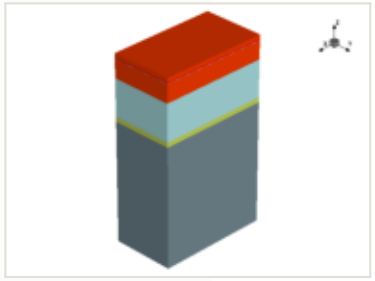

this step

process area	CVD
material	—
thickness	0.036 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

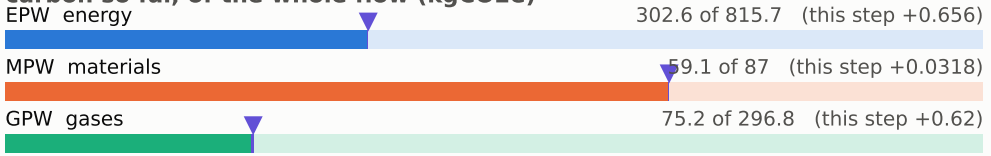

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

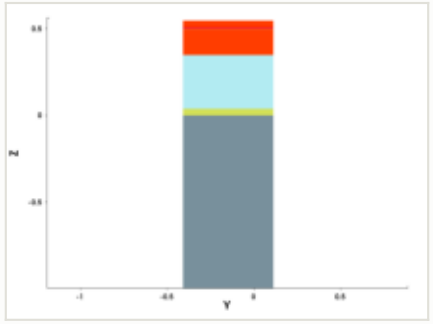

y cut at -0.150 µm

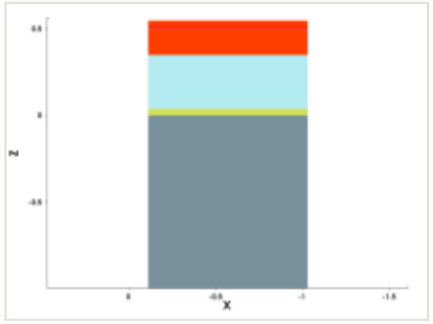

mask for this step

no mask for this step

steps by process area

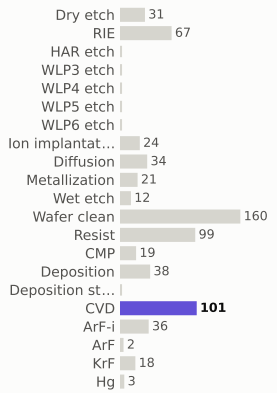

materials deposited (g)

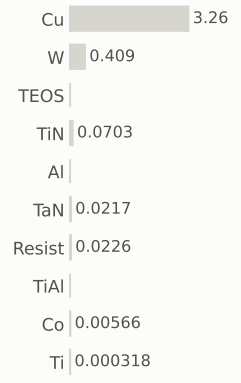

gases emitted (g)

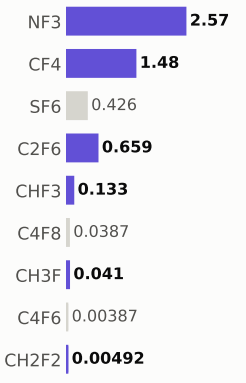

Step #14300: CVD

depo_isotropic · CVD

1.31	438.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

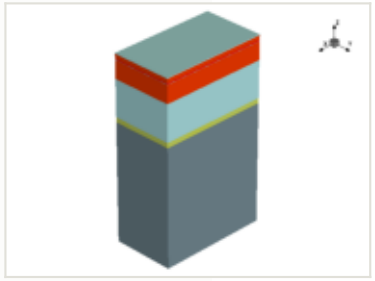

this step

process area	CVD
material	—
thickness	0.007 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

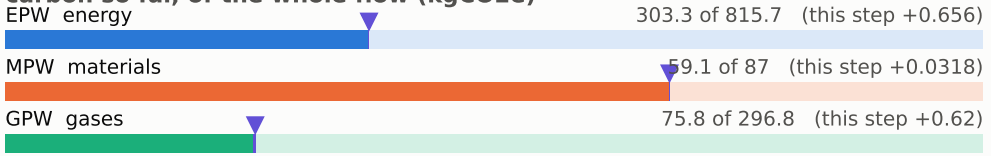

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

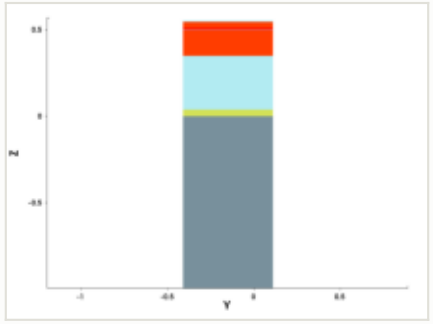

y cut at -0.150 µm

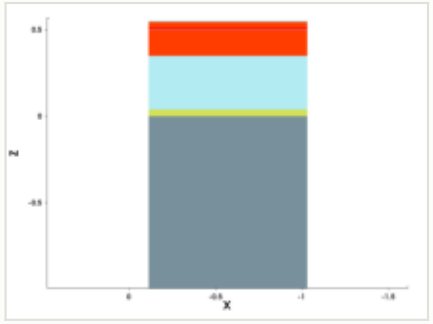

mask for this step

no mask for this step

steps by process area

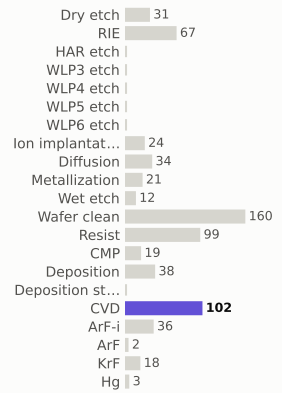

materials deposited (g)



gases emitted (g)

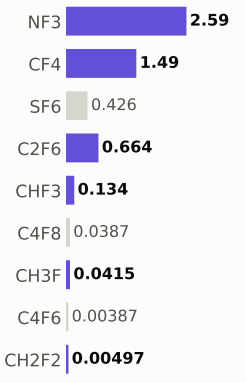

Step #14310: Diffusion

implant_ellipsoid · Diffusion

0.801	439.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

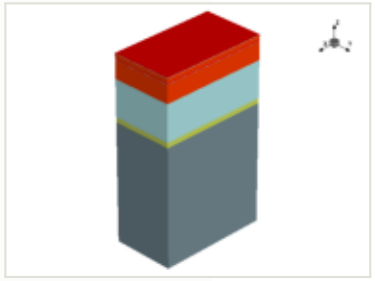

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

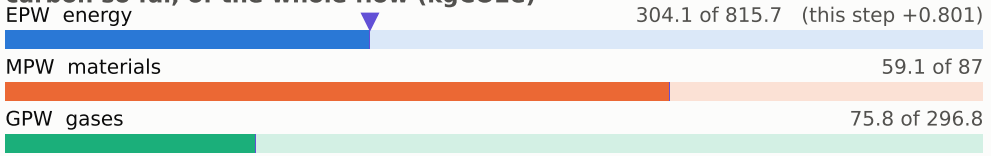

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

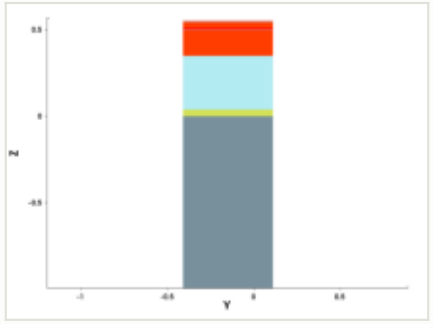

y cut at -0.150 µm

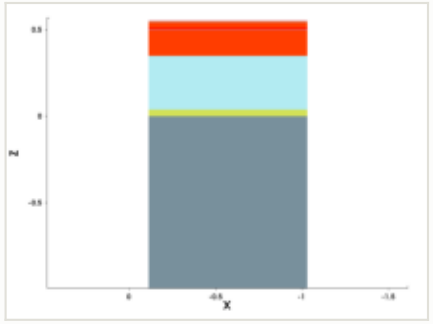

mask for this step

no mask for this step

steps by process area

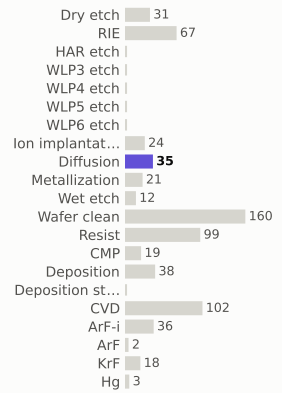

materials deposited (g)

gases emitted (g)

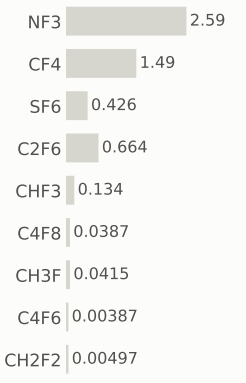

Step #14320: Diffusion

anneal · Diffusion

0.801	439.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

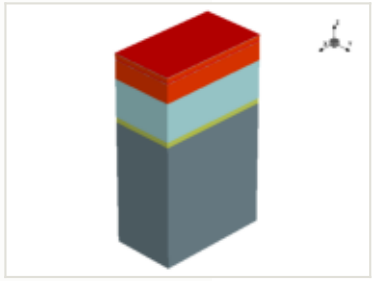

x cut at -0.570 µm

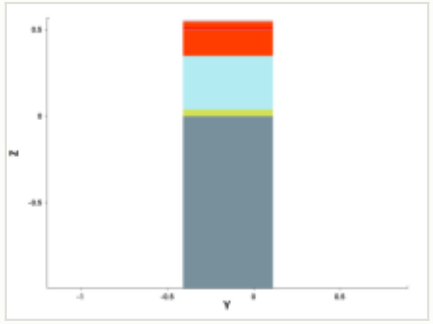

y cut at -0.150 µm

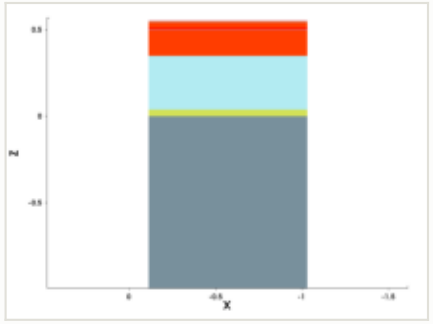

mask for this step

no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

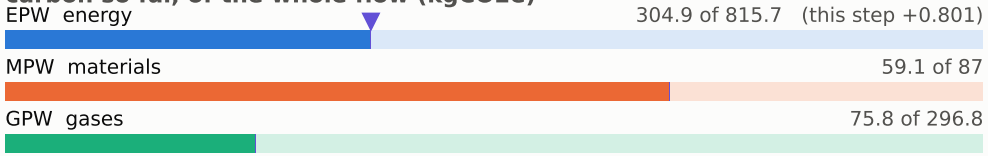

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

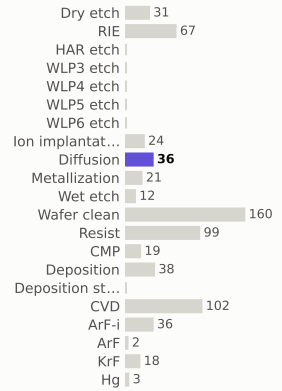

materials deposited (g)

gases emitted (g)

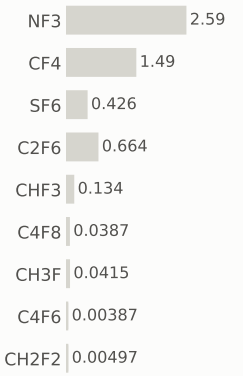

Step #14330: CVD

depo_isotropic · CVD

1.31	441.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

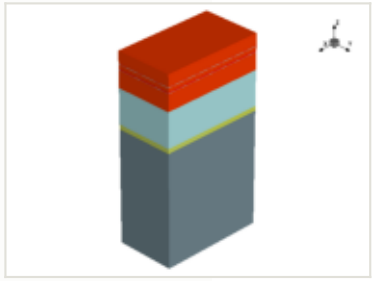

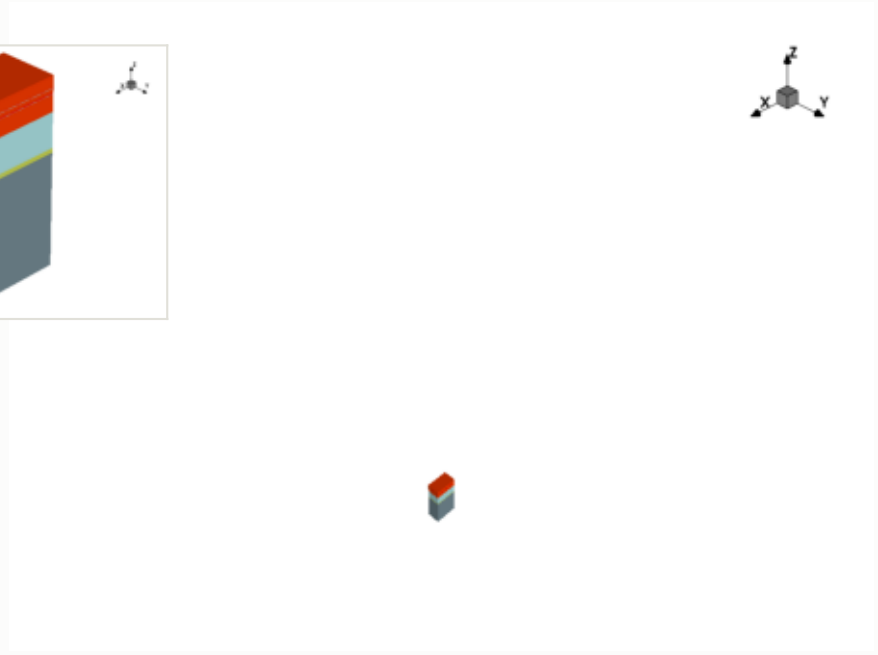

this step

process area	CVD
material	—
thickness	0.105 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

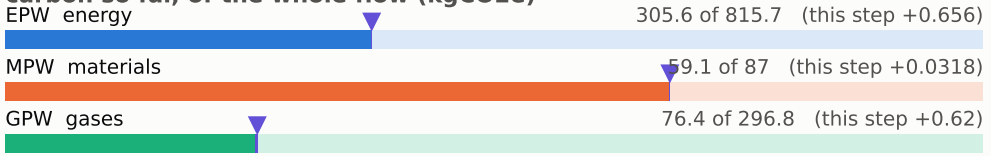

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

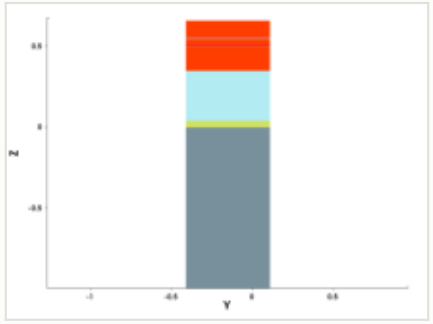

y cut at -0.150 µm

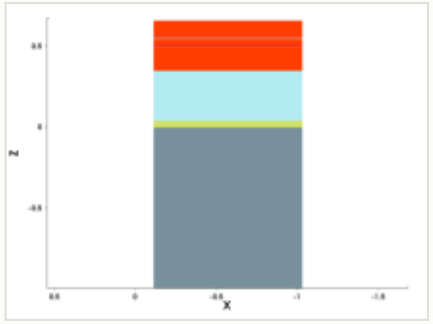

mask for this step

no mask for this step

steps by process area

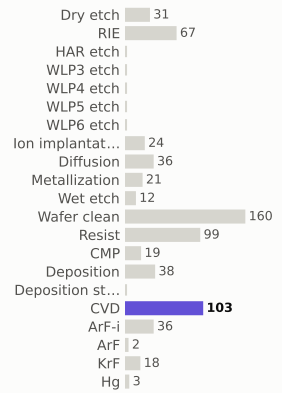

materials deposited (g)

gases emitted (g)

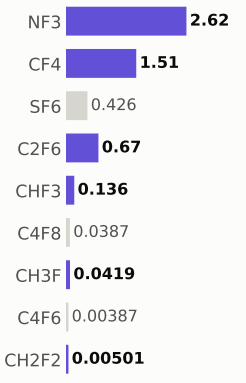

Step #14340: KrF

litho_patterning · KrF

0.199	441.3	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

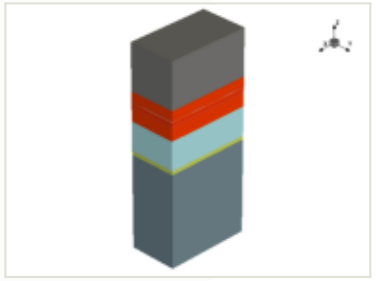

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

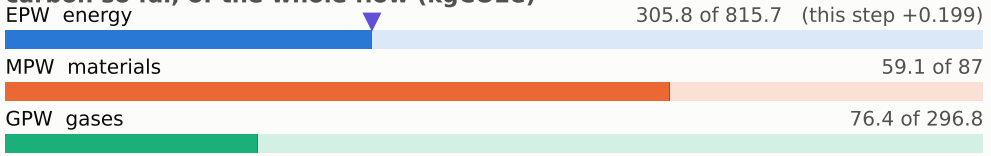

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

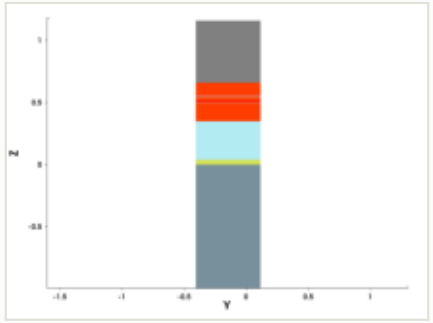

y cut at -0.150 µm

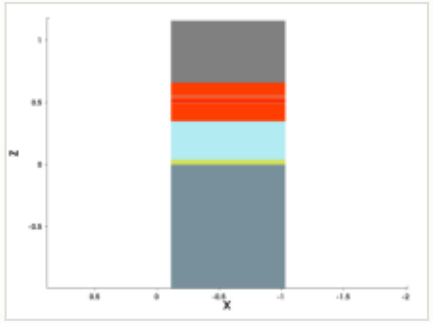

mask: layer 25:0, positive (GDSII)

steps by process area

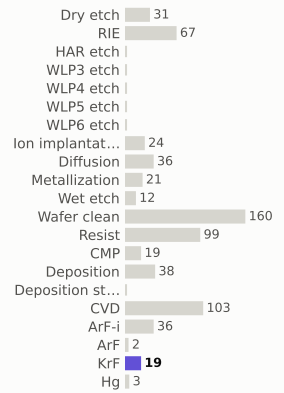

materials deposited (g)

gases emitted (g)

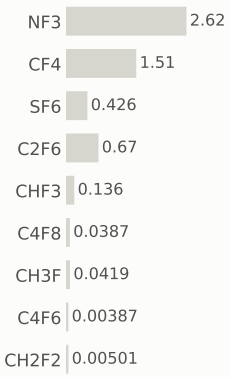

Step #14350: RIE

etch_anisotropic · RIE

1.04	442.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

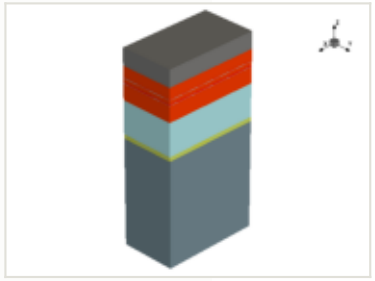

x cut at -0.570 µm

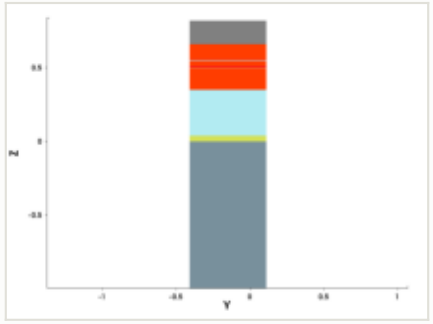

y cut at -0.150 µm

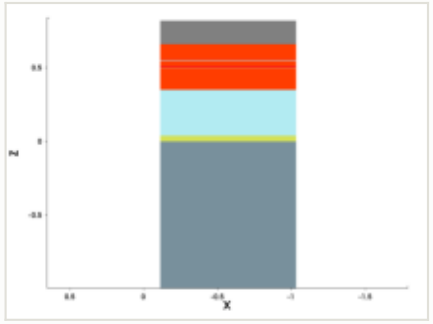

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

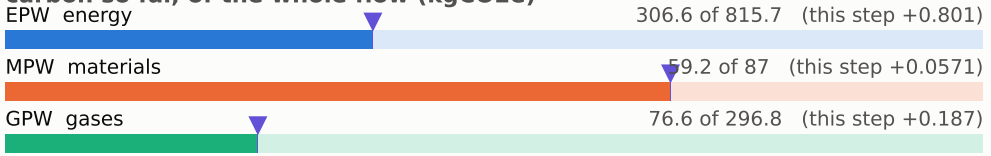

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

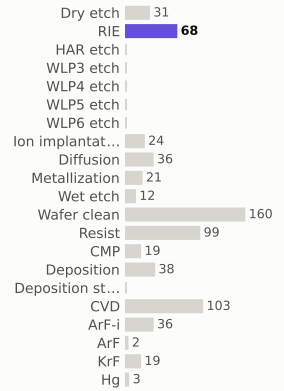

materials deposited (g)

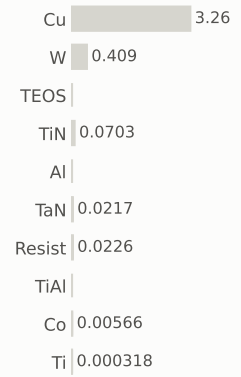

gases emitted (g)

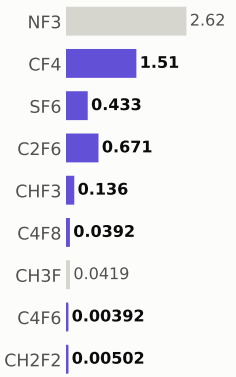

Step #14360: Dry_etch

etch_strip · Dry_etch

0.801	443.2	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

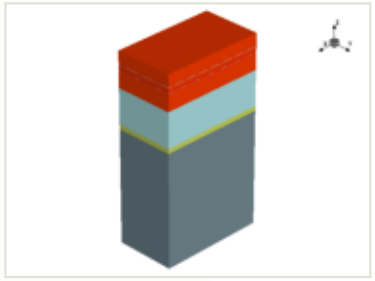

x cut at -0.570 µm

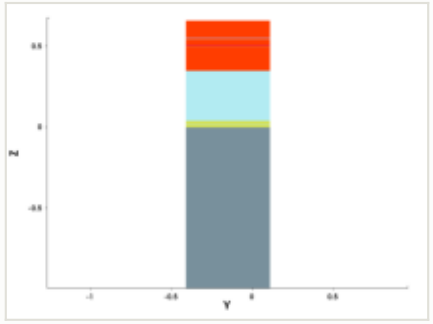

y cut at -0.150 µm

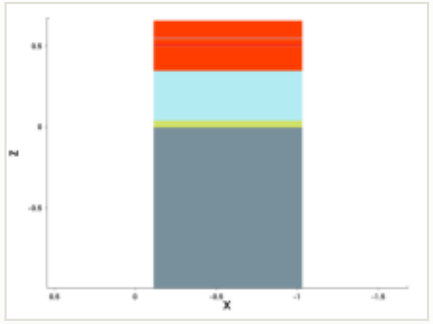

mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

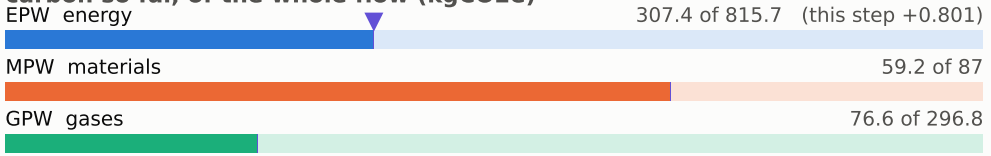

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

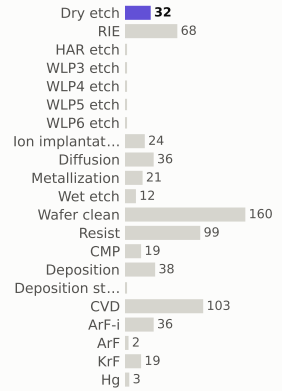

materials deposited (g)

gases emitted (g)

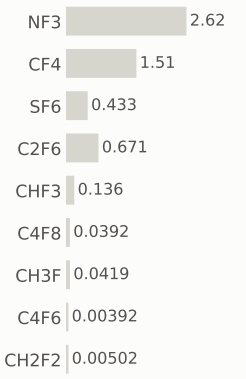

Step #14370: Wafer_clean

clean · Wafer_clean

0.169	443.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

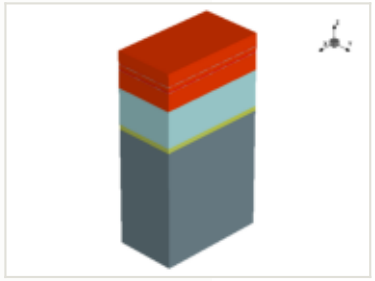

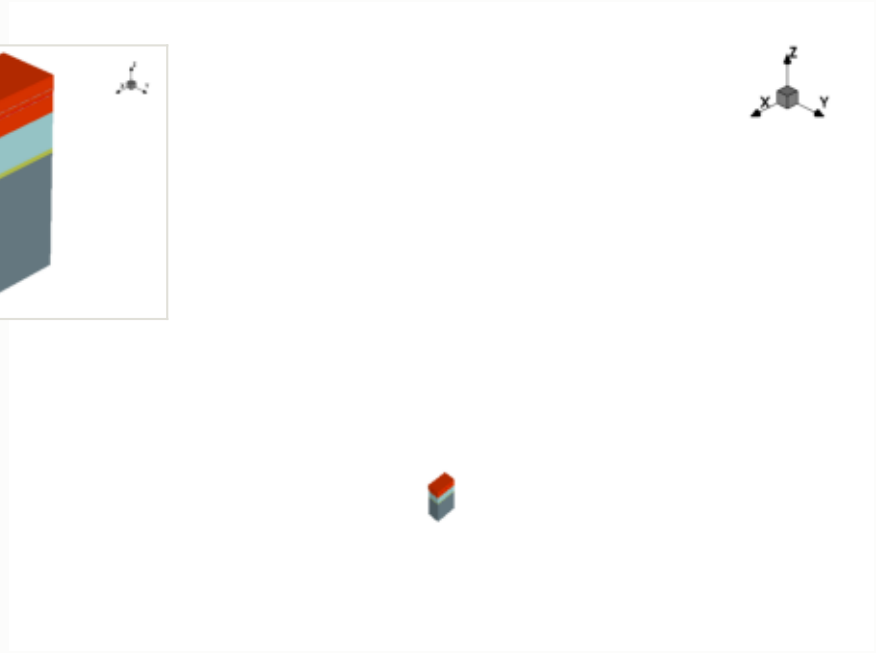

x cut at -0.570 µm

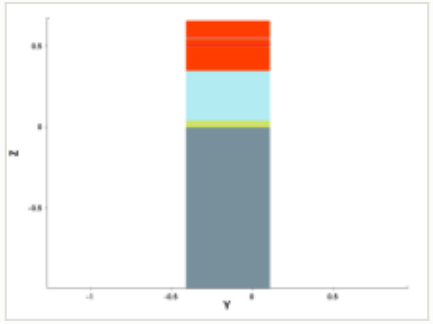

y cut at -0.150 µm

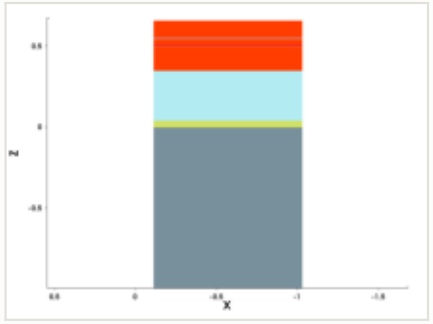

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

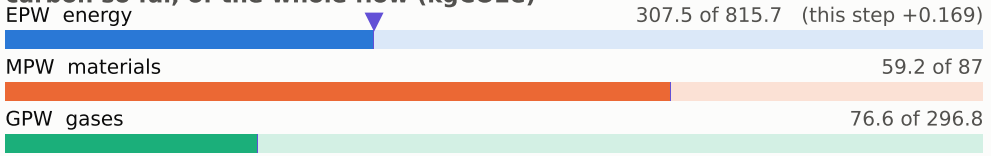

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

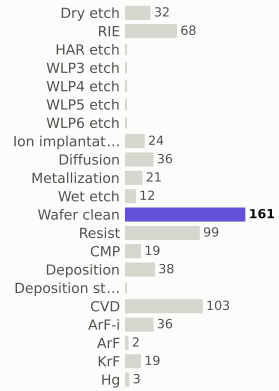

materials deposited (g)

gases emitted (g)

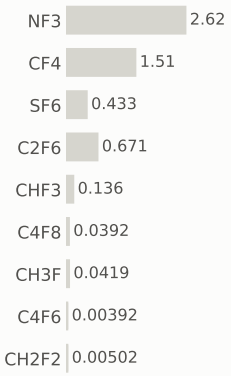

Step #14380: CVD

depo_isotropic · CVD

1.31	444.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

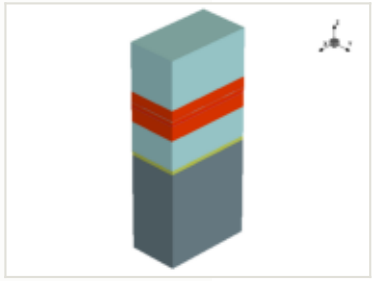

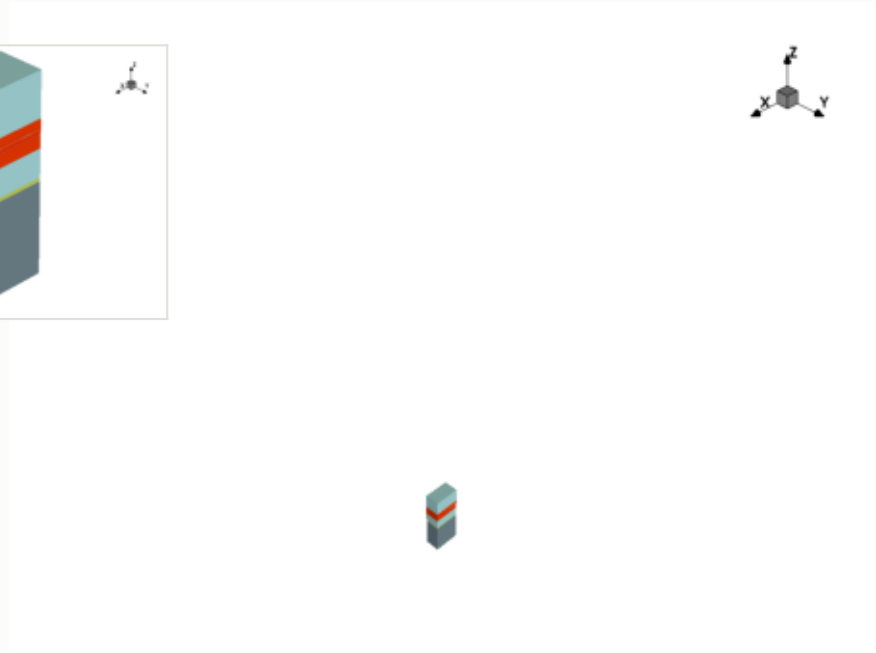

this step

process area	CVD
material	—
thickness	0.5 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

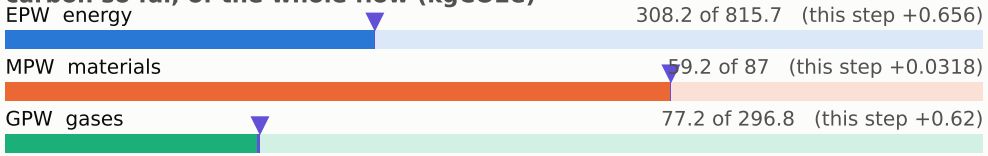

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

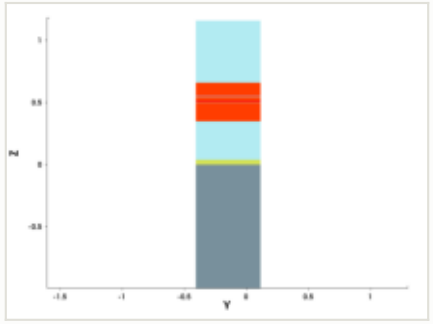

y cut at -0.150 µm

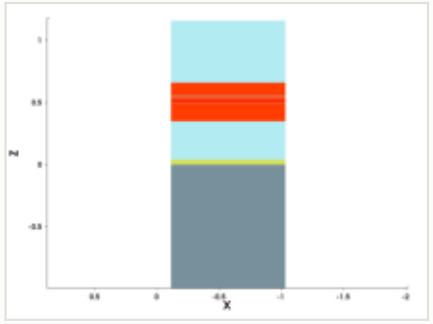

mask for this step

no mask for this step

steps by process area

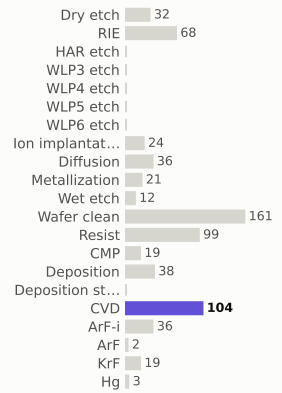

materials deposited (g)

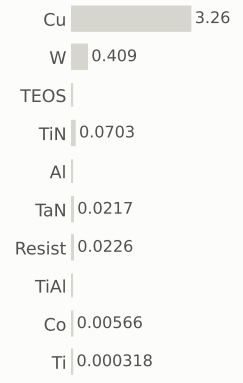

gases emitted (g)

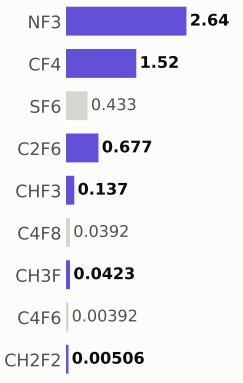

Step #14390: CMP

etch_cmp · CMP

0.169	444.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

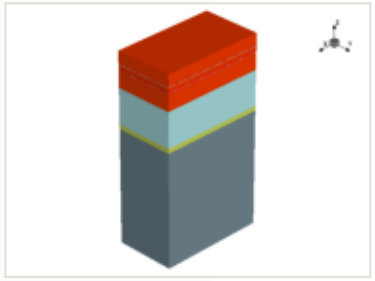

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

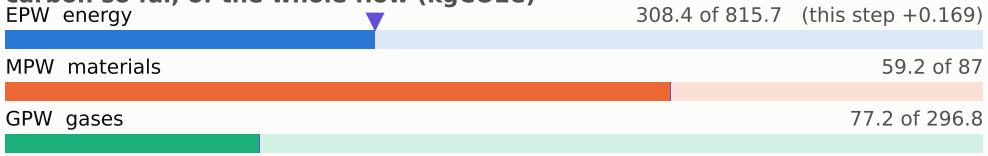

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

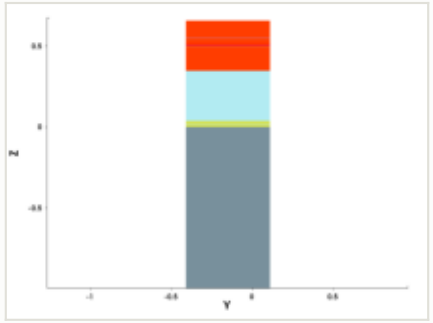

y cut at -0.150 µm

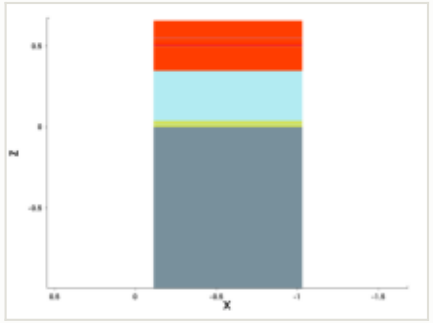

mask for this step

no mask for this step

steps by process area

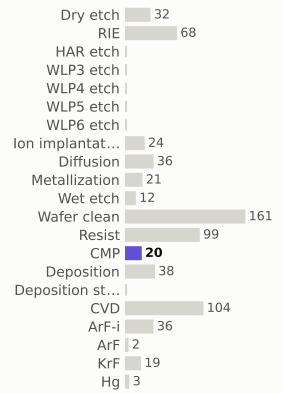

materials deposited (g)

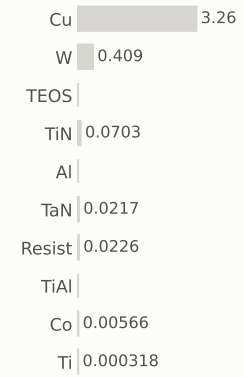

gases emitted (g)

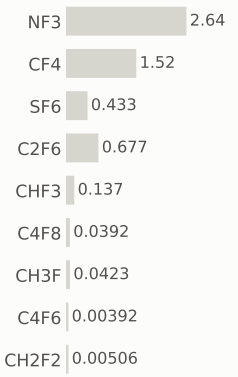

Step #14400: Wafer_clean

clean · Wafer_clean

0.169	445.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

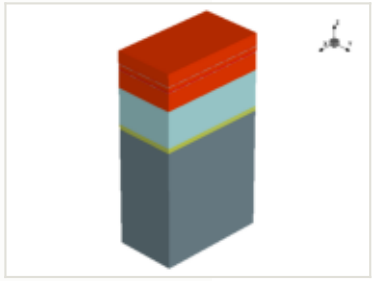

x cut at -0.570 µm

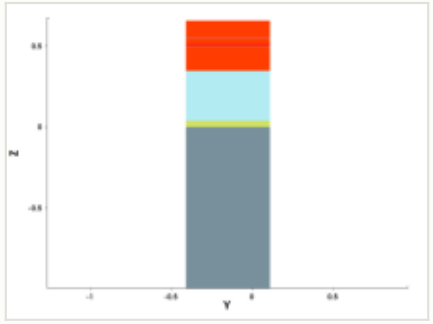

y cut at -0.150 µm

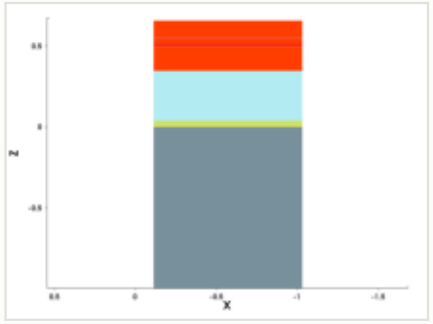

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

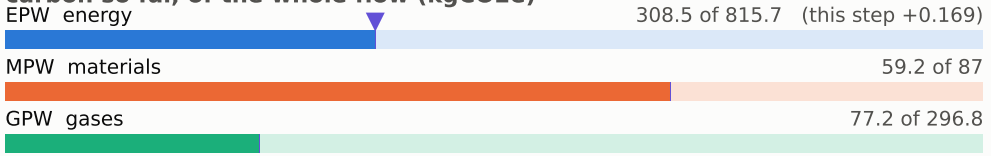

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

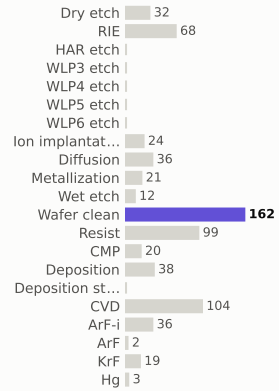

materials deposited (g)

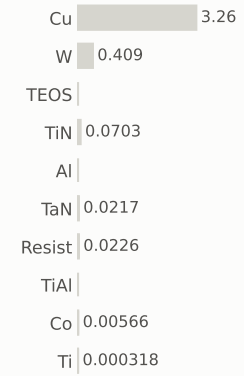

gases emitted (g)

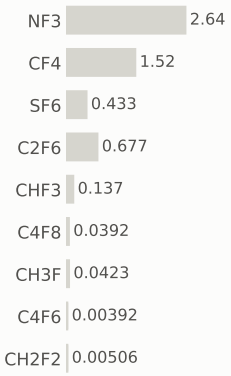

Step #14410: Wafer_clean

clean · Wafer_clean

0.169	445.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

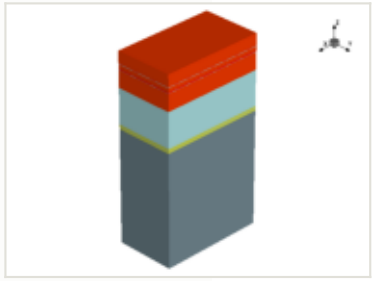

x cut at -0.570 µm

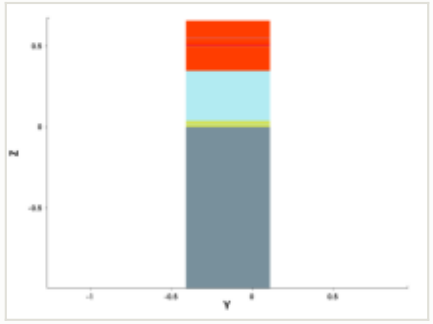

y cut at -0.150 µm

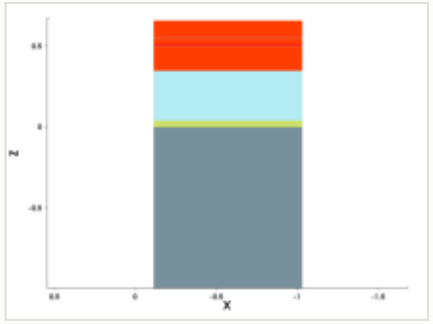

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

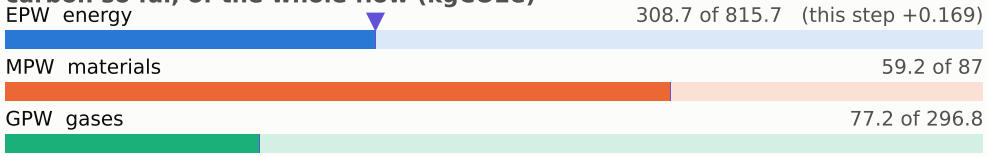

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

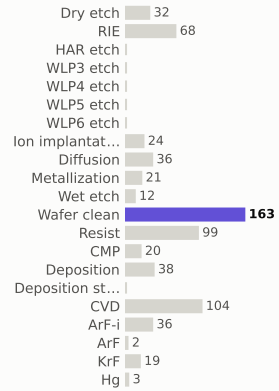

materials deposited (g)

gases emitted (g)

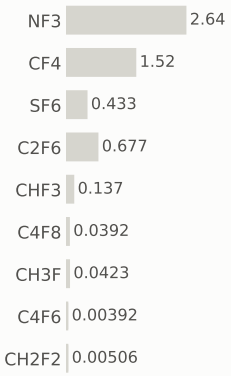

Step #14420: CVD

depo_isotropic · CVD

1.31	446.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

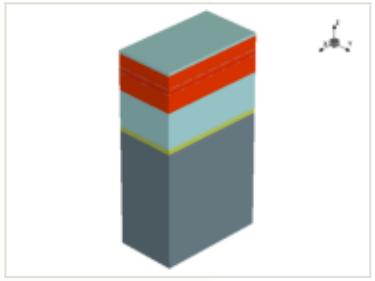

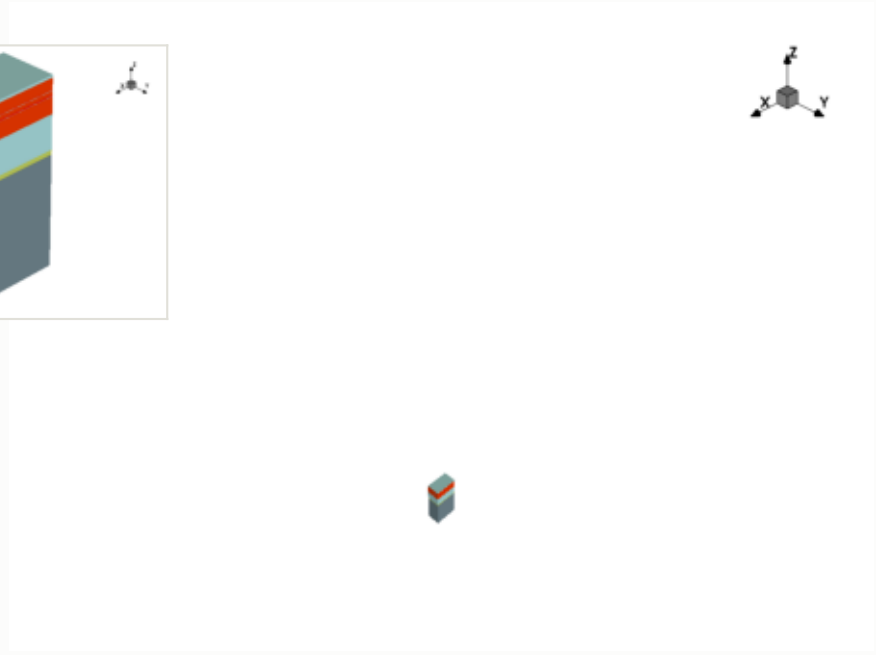

this step

process area	CVD
material	—
thickness	0.025 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

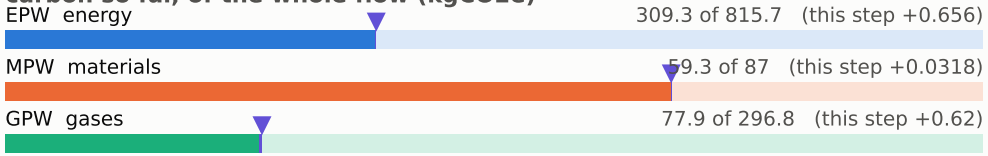

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

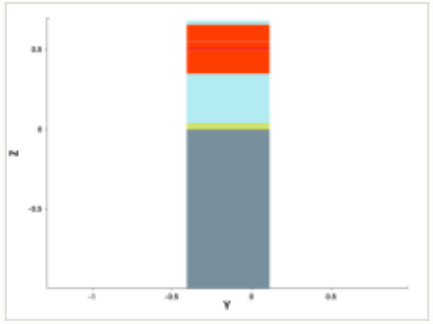

y cut at -0.150 µm

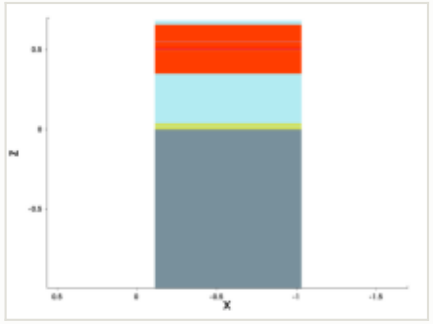

mask for this step

no mask for this step

steps by process area

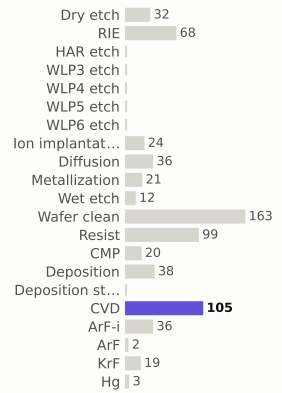

materials deposited (g)

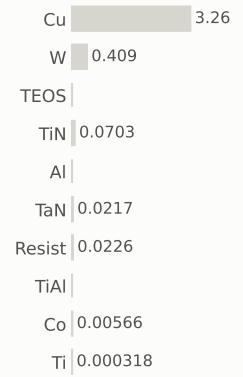

gases emitted (g)

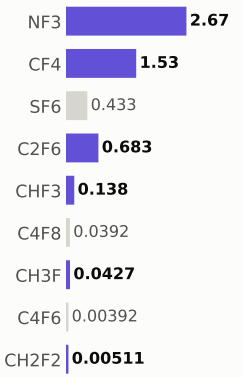

Step #14430: ArF

litho_patterning · ArF

0.199	446.7	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

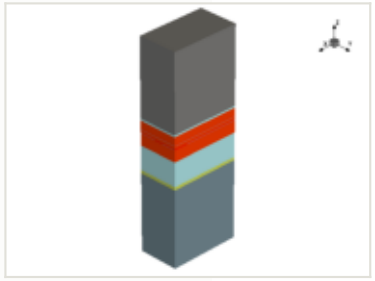

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

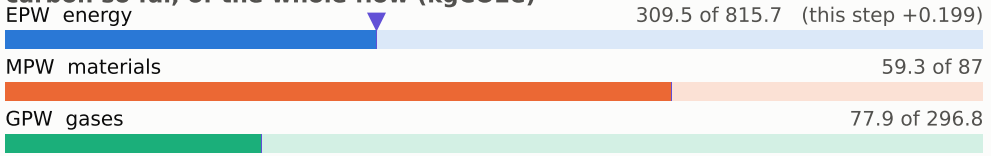

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

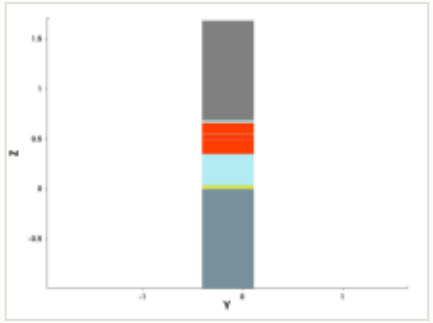

y cut at -0.150 µm

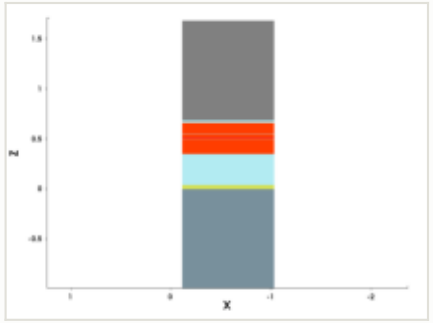

mask: layer 26:0, negative (GDSII)

nothing in the clip window

steps by process area

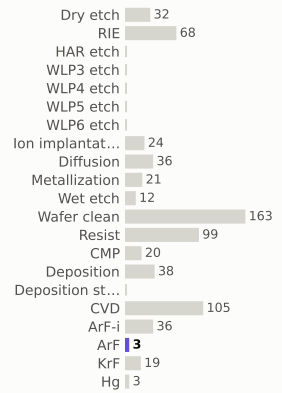

materials deposited (g)

gases emitted (g)

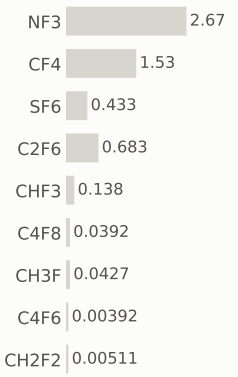

Step #14440: RIE

etch_anisotropic · RIE

1.04	447.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

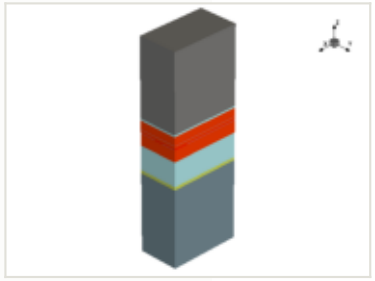

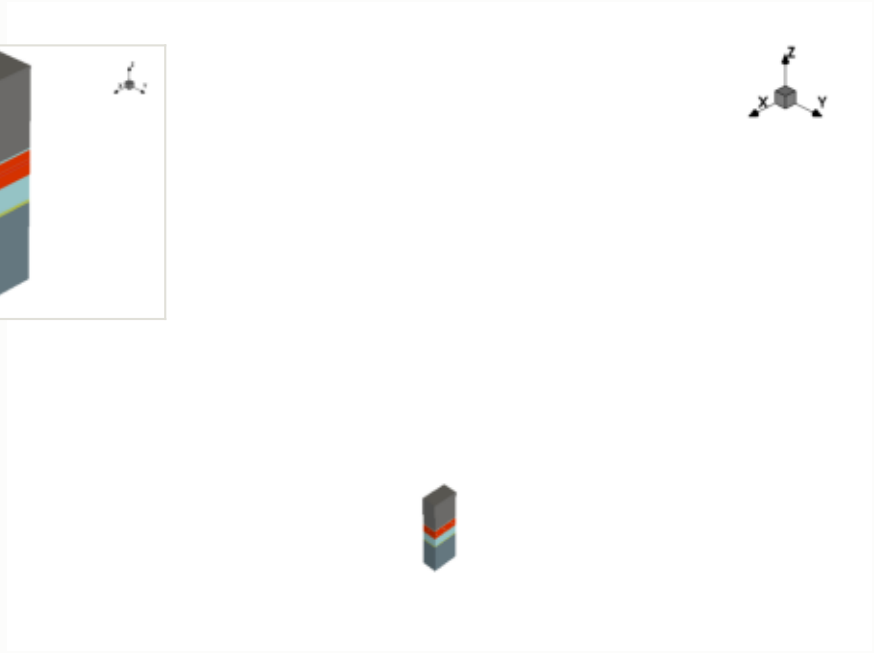

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

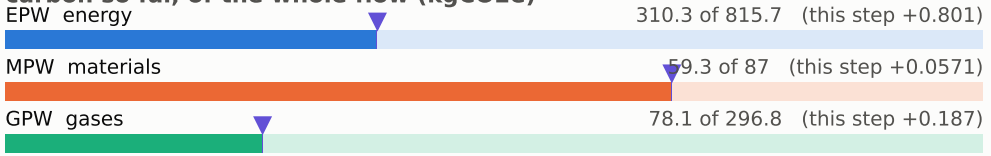

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

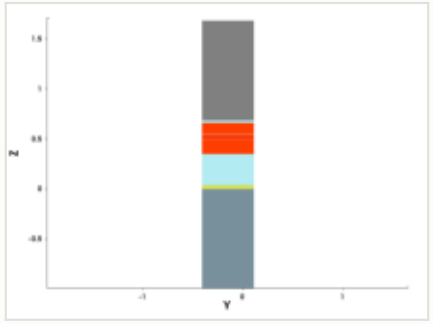

y cut at -0.150 µm

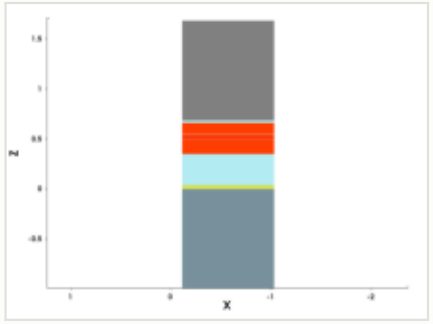

mask for this step

no mask for this step

steps by process area

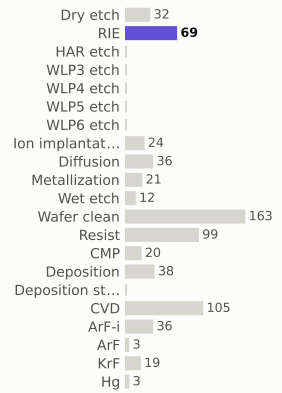

materials deposited (g)

gases emitted (g)

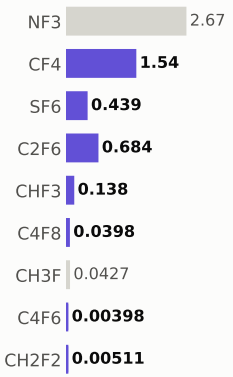

Step #14450: RIE

etch_anisotropic · RIE

1.04	448.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

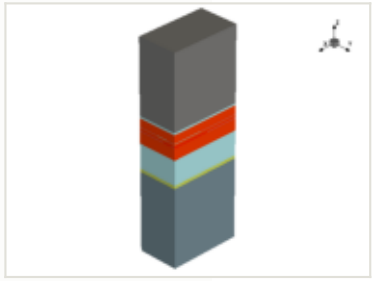

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

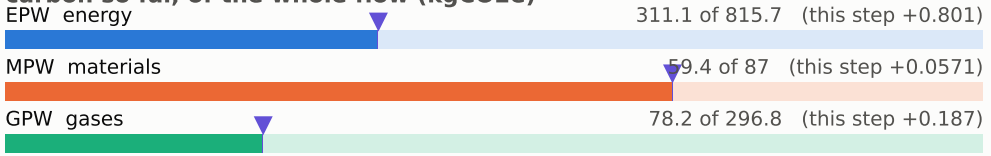

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

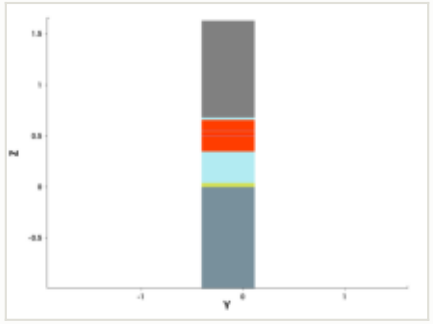

y cut at -0.150 µm

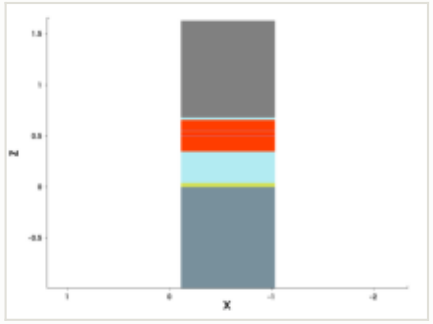

mask for this step

no mask for this step

steps by process area

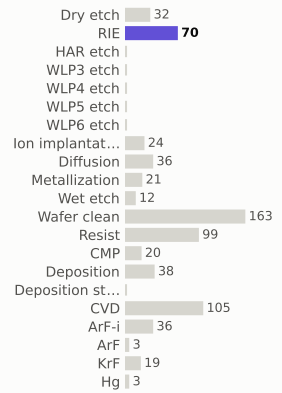

materials deposited (g)

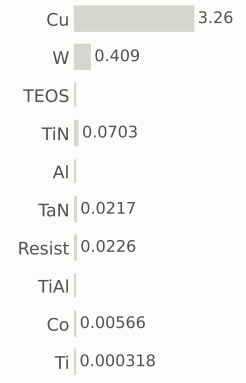

gases emitted (g)

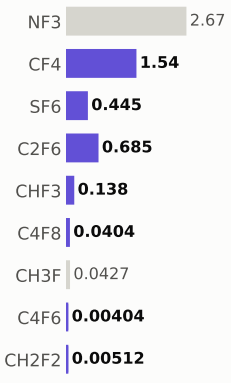

Step #14460: Dry_etch

etch_strip · Dry_etch

0.801	449.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

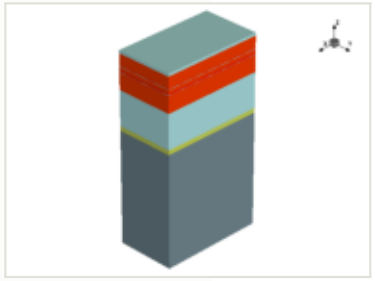

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

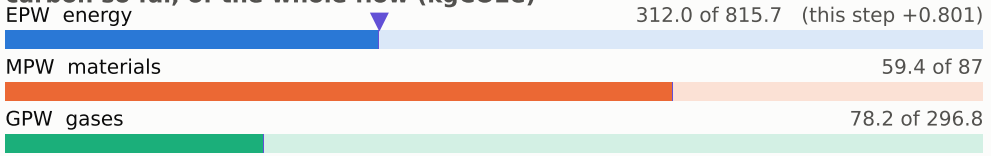

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

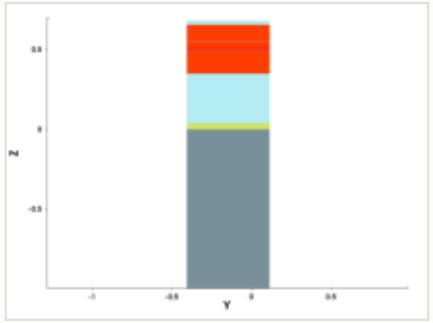

y cut at -0.150 µm

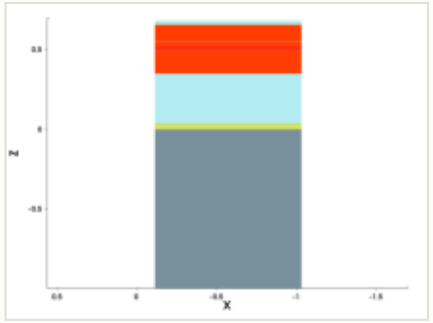

mask for this step

no mask for this step

steps by process area

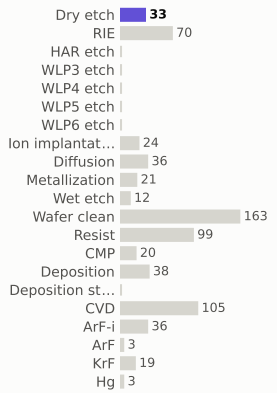

materials deposited (g)

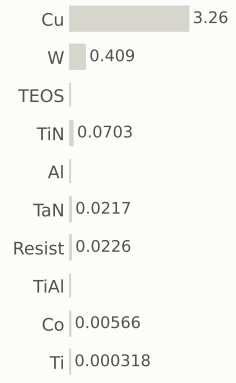

gases emitted (g)

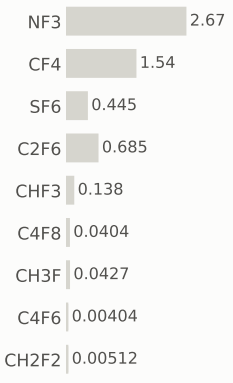

Step #14470: Wafer_clean

clean · Wafer_clean

0.169	449.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

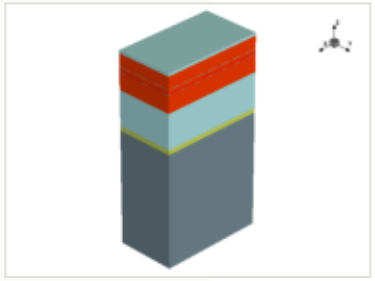

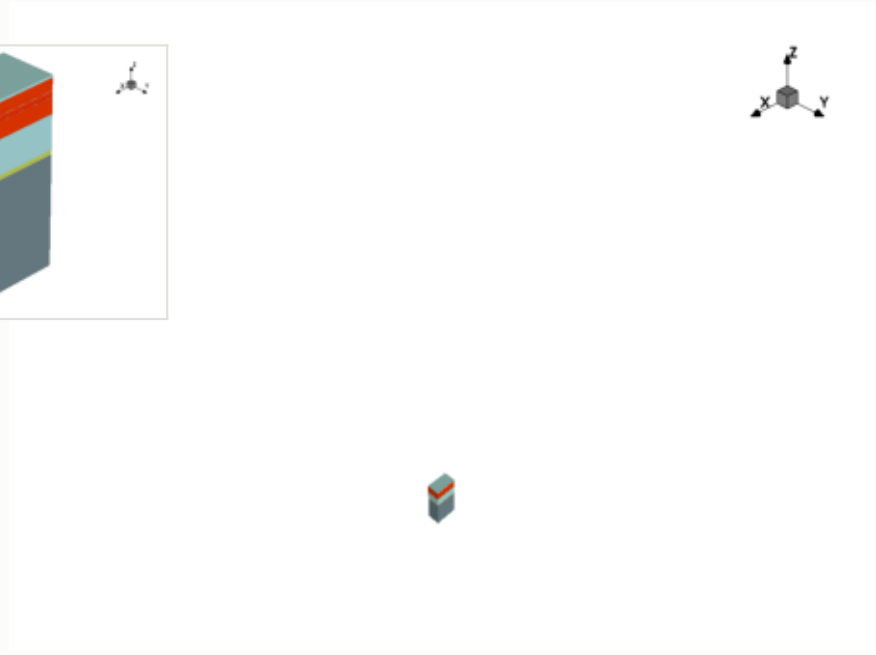

x cut at -0.570 µm

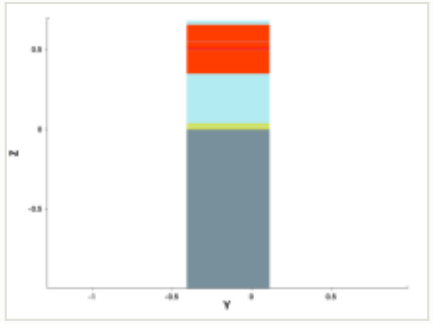

y cut at -0.150 µm

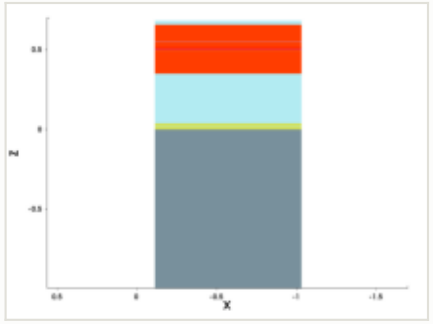

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

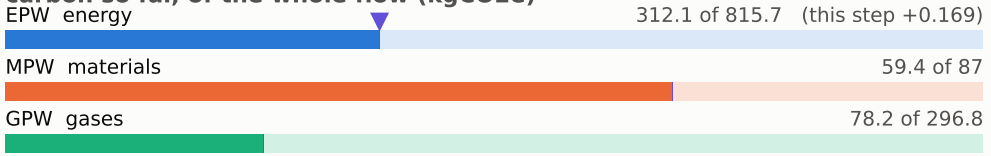

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

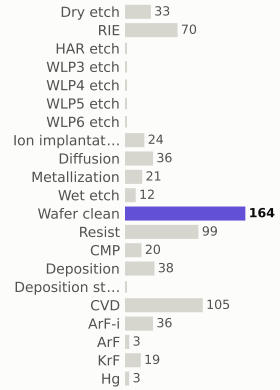

materials deposited (g)

gases emitted (g)

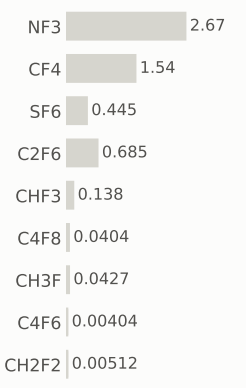

Step #14480: CVD

depo_isotropic · CVD

1.31	451.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

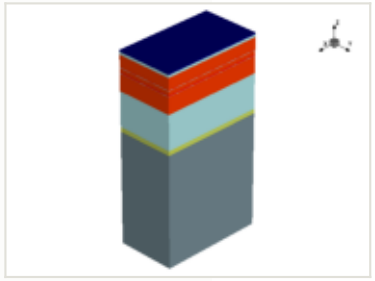

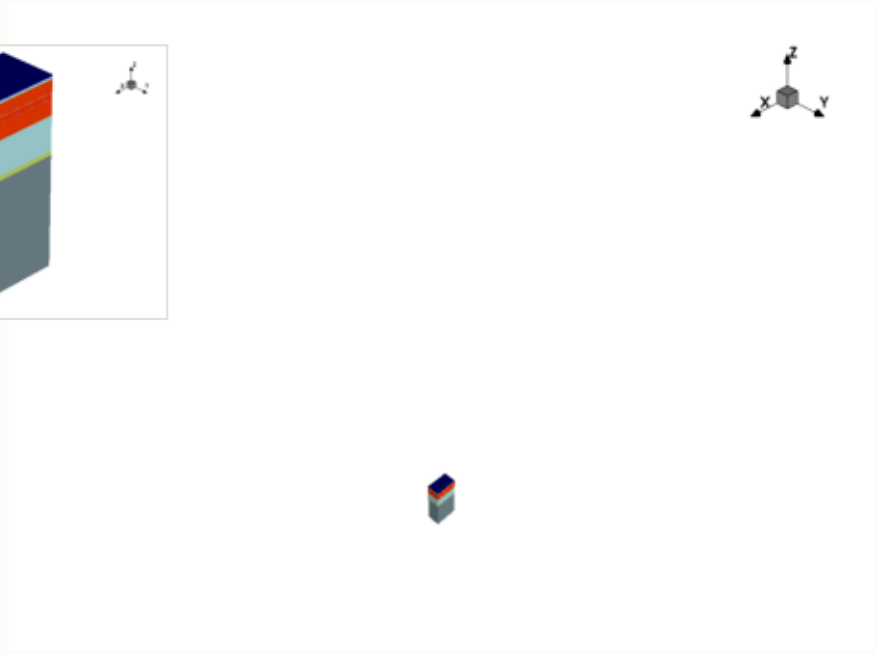

this step

process area	CVD
material	TiN
thickness	0.015 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.032 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

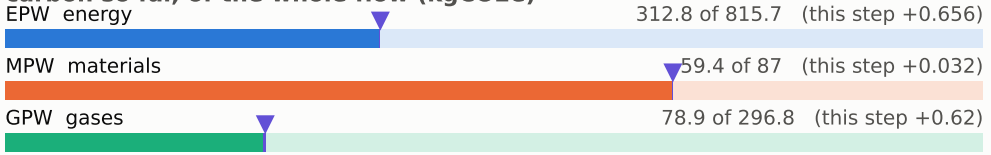

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

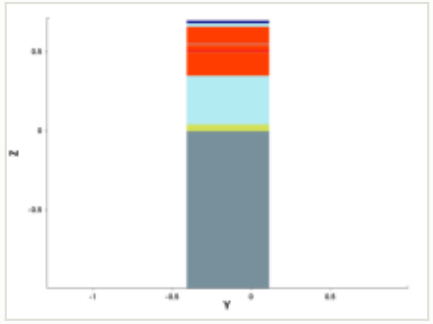

y cut at -0.150 µm

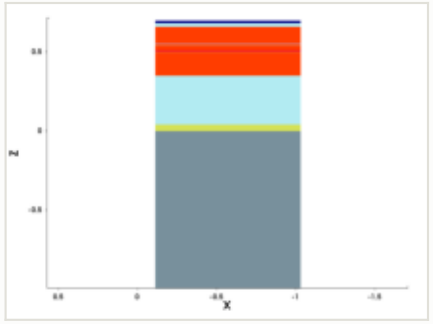

mask for this step

no mask for this step

steps by process area

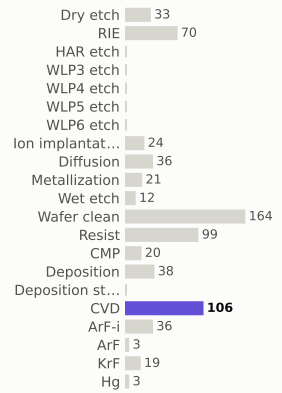

materials deposited (g)

gases emitted (g)

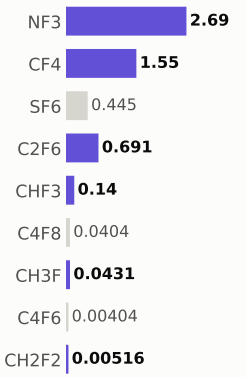

Step #14490: Metallization

depo_isotropic · Metallization

1.24	452.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

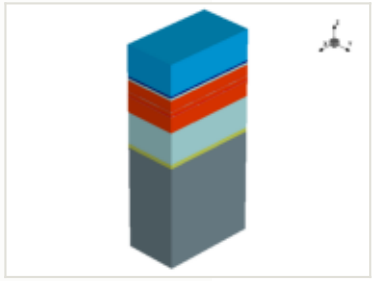

x cut at -0.570 µm

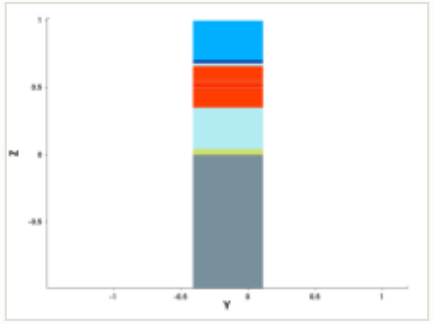

y cut at -0.150 µm

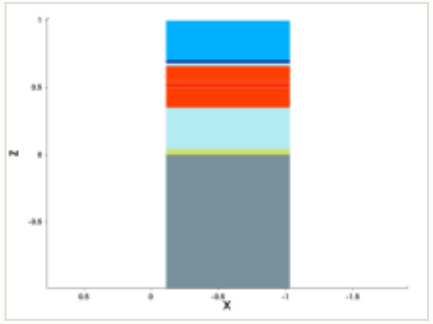

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.3 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.031 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.24 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

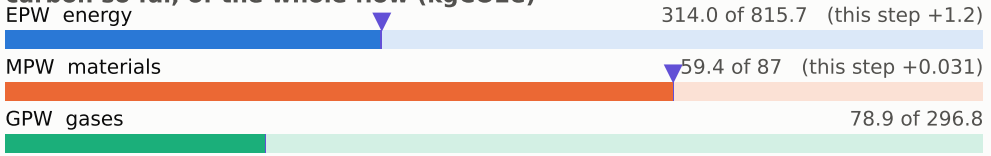

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

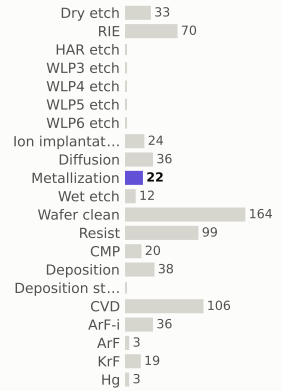

materials deposited (g)

gases emitted (g)

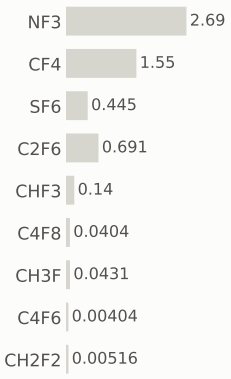

Step #14500: CMP

etch_cmp · CMP

0.169	452.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

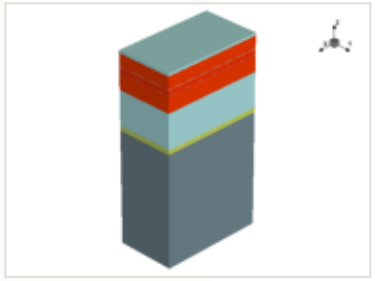

x cut at -0.570 µm

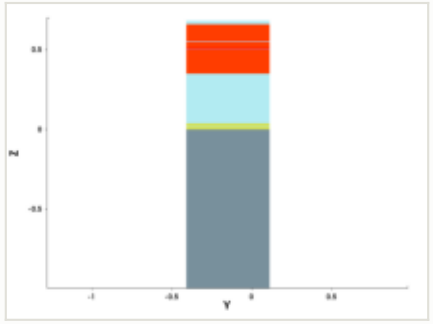

y cut at -0.150 µm

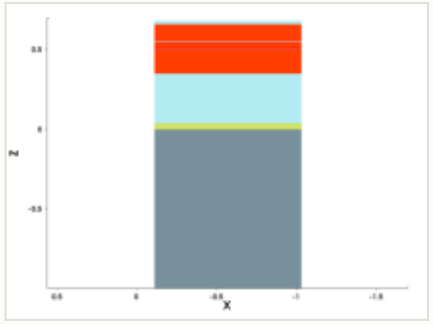

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

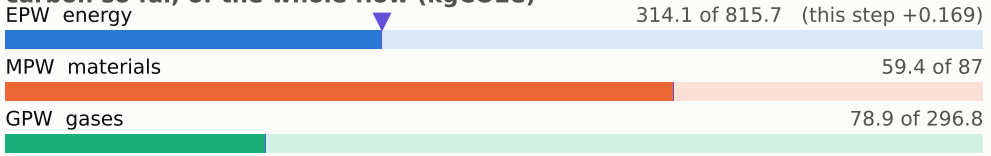

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

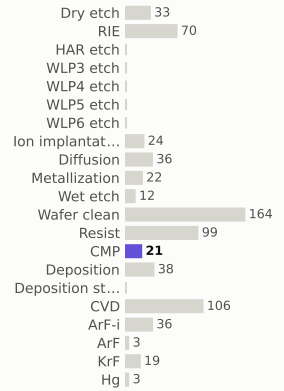

materials deposited (g)

gases emitted (g)

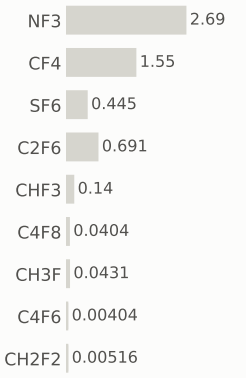

Step #14510: Wafer_clean

clean · Wafer_clean

0.169	452.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

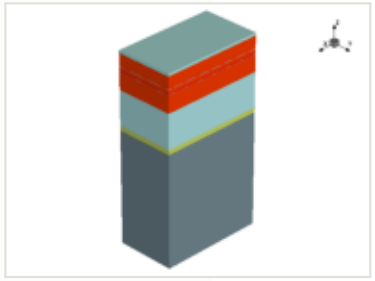

x cut at -0.570 µm

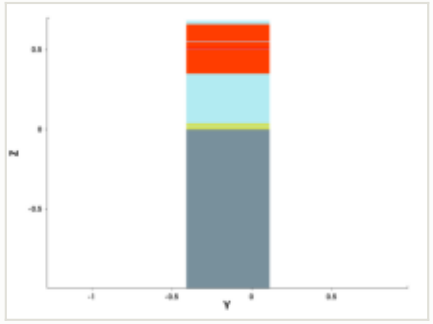

y cut at -0.150 µm

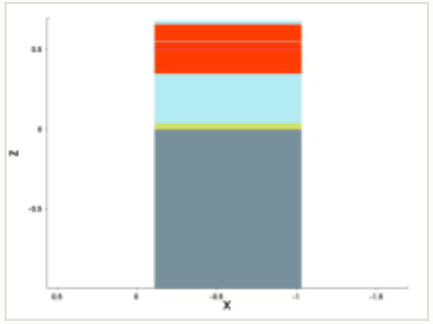

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

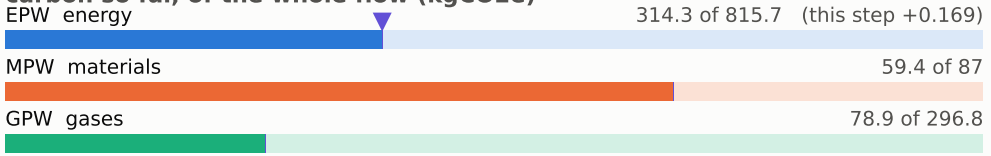

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

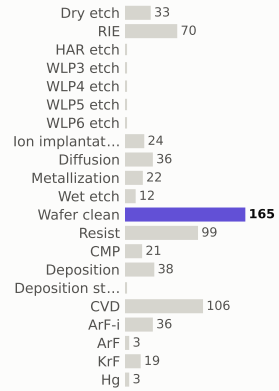

materials deposited (g)

gases emitted (g)

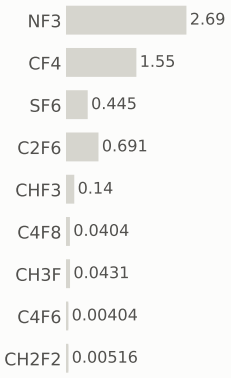

Step #14520: CVD

depo_isotropic · CVD

1.31	453.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

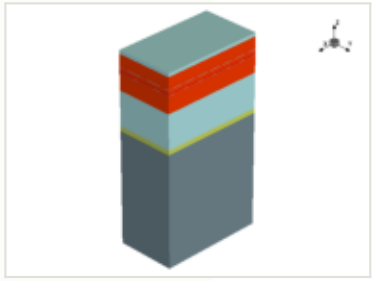

x cut at -0.570 µm

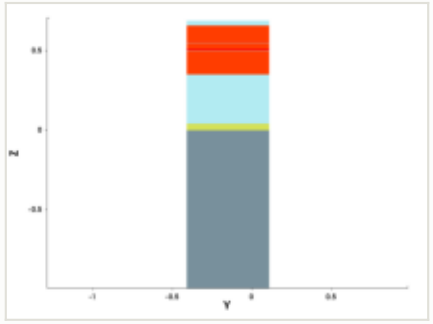

y cut at -0.150 µm

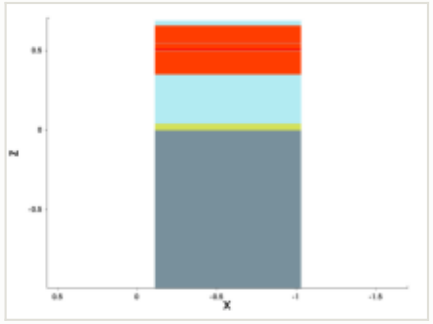

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.007 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

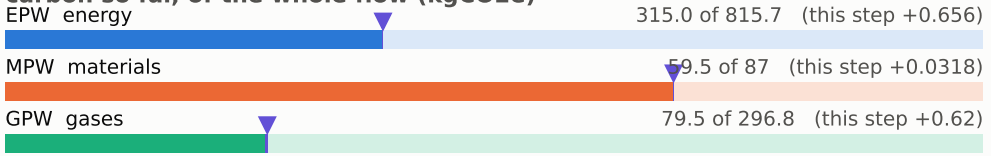

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

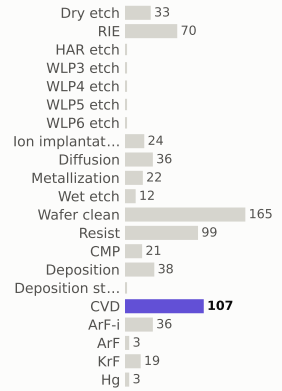

materials deposited (g)

gases emitted (g)

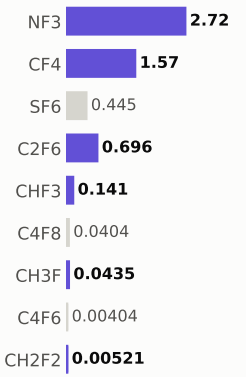

Step #14540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	454.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

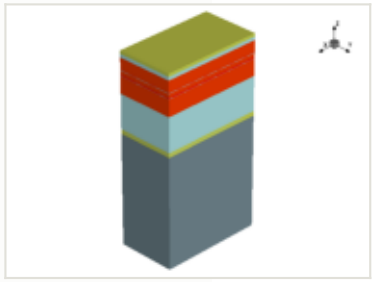

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

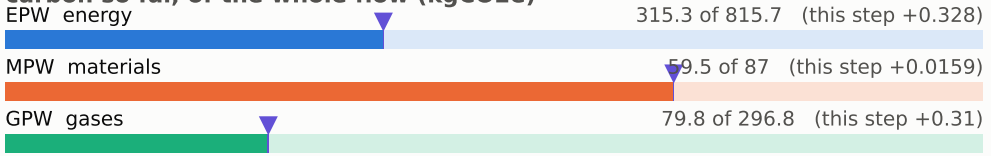

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

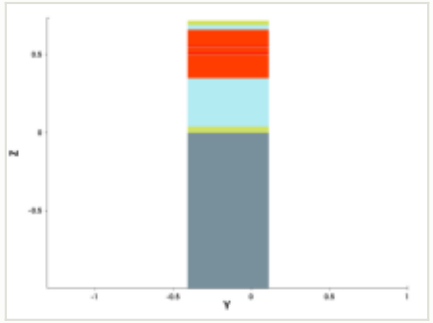

y cut at -0.150 µm

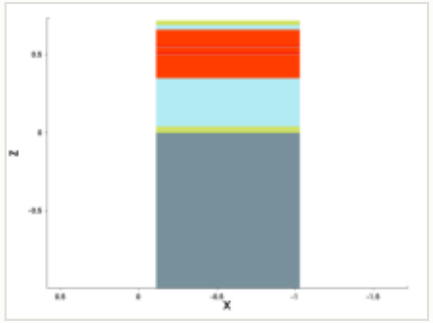

mask for this step

no mask for this step

steps by process area

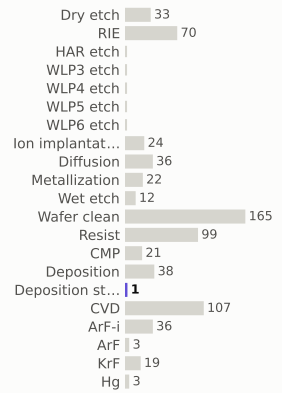

materials deposited (g)

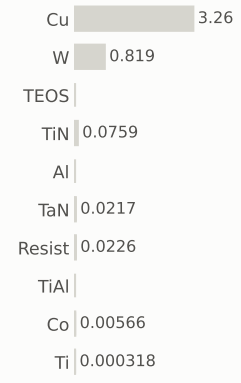

gases emitted (g)

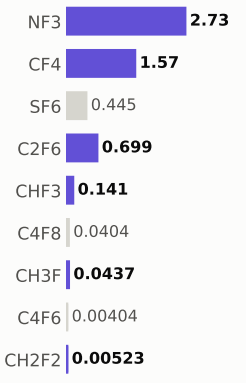

Step #14550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	455.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

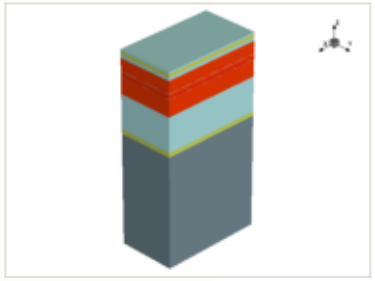

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

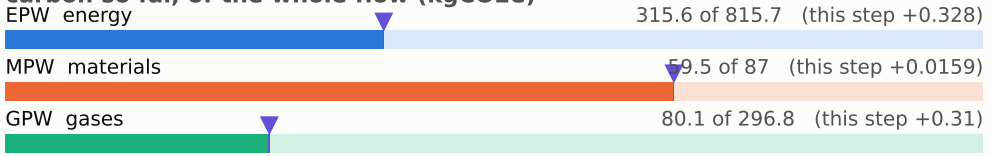

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

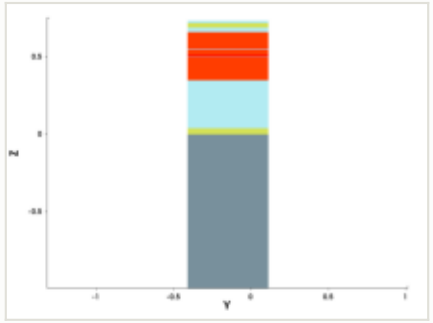

y cut at -0.150 µm

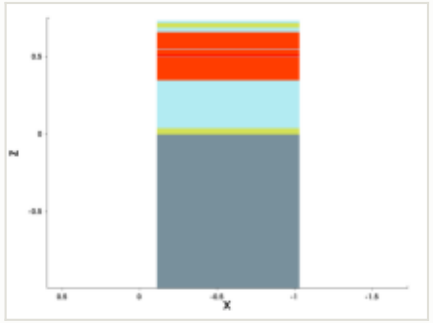

mask for this step

no mask for this step

steps by process area

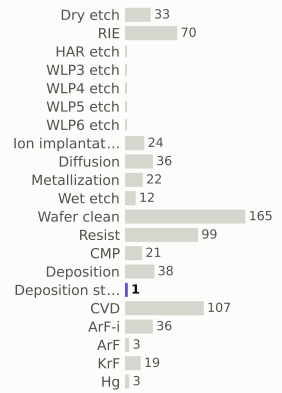

materials deposited (g)

gases emitted (g)

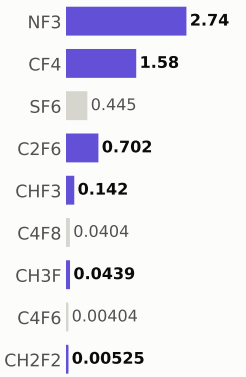

Step #14560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	455.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

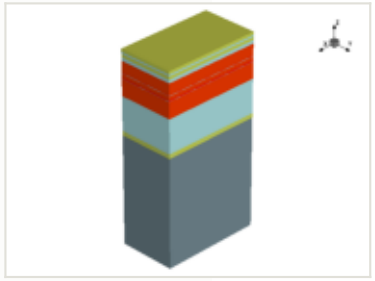

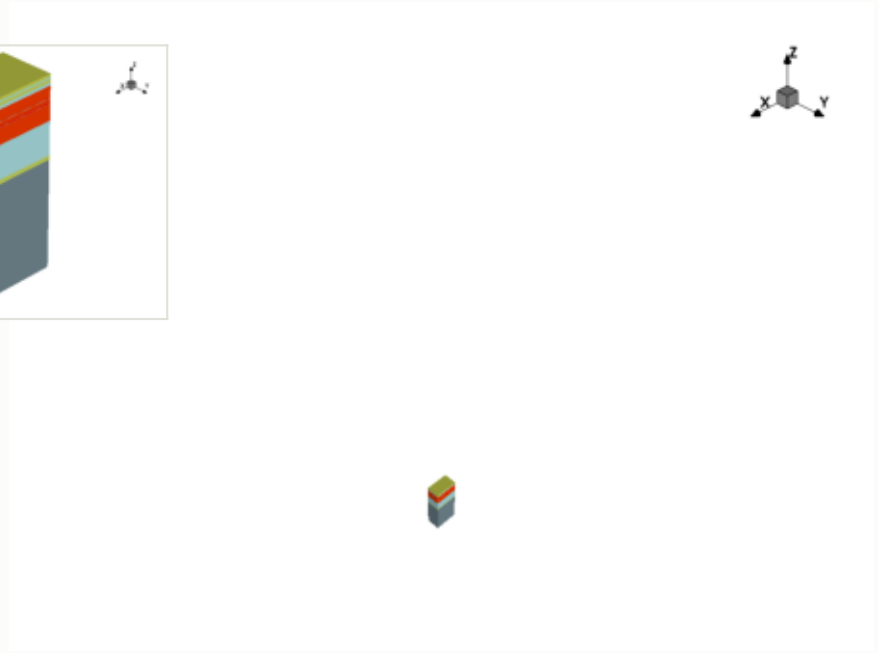

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

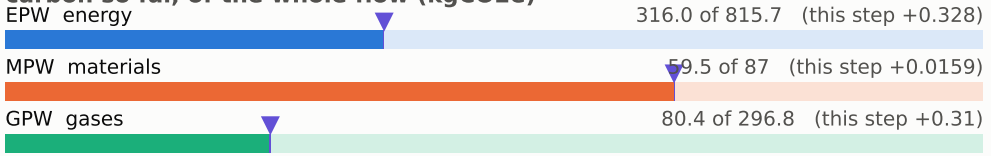

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

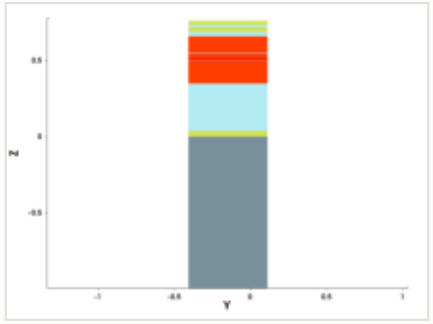

y cut at -0.150 µm

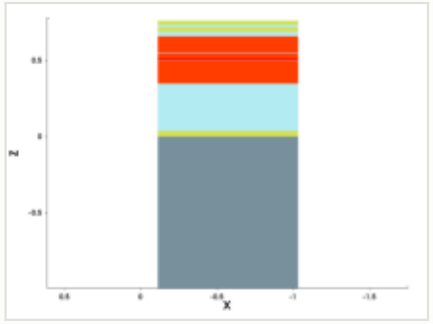

mask for this step

no mask for this step

steps by process area

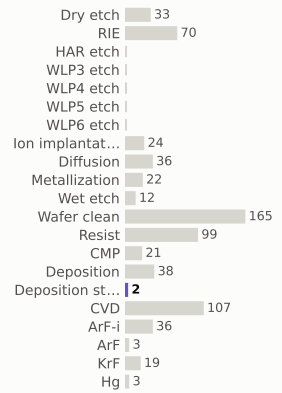

materials deposited (g)

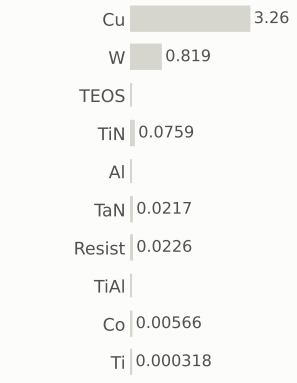

gases emitted (g)

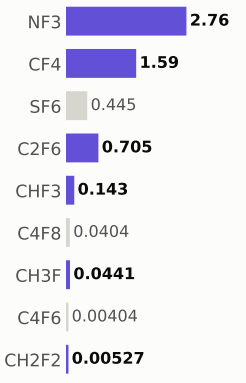

Step #14570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	456.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

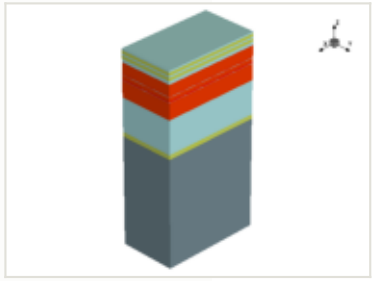

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

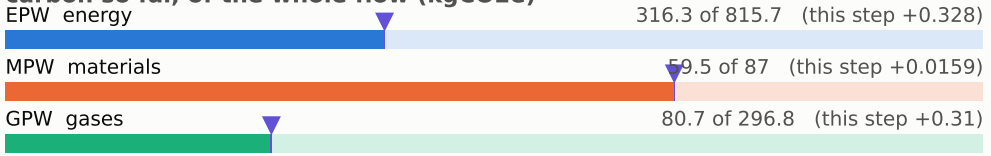

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

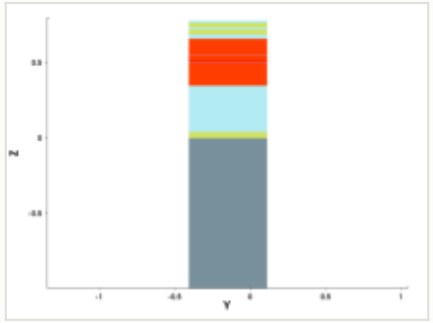

y cut at -0.150 µm

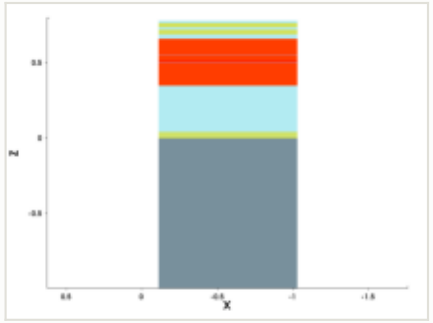

mask for this step

no mask for this step

steps by process area

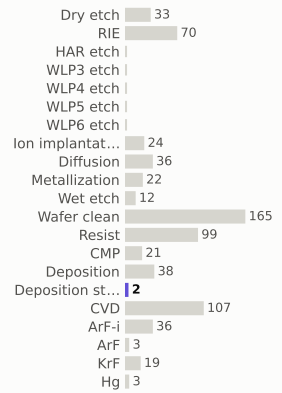

materials deposited (g)

gases emitted (g)

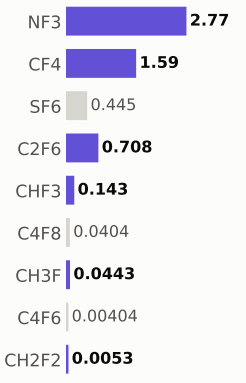

Step #14580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	457.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

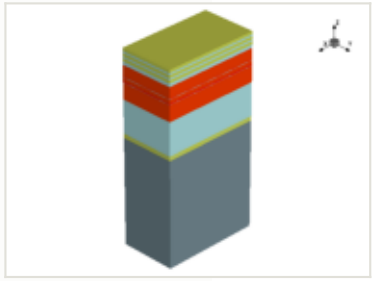

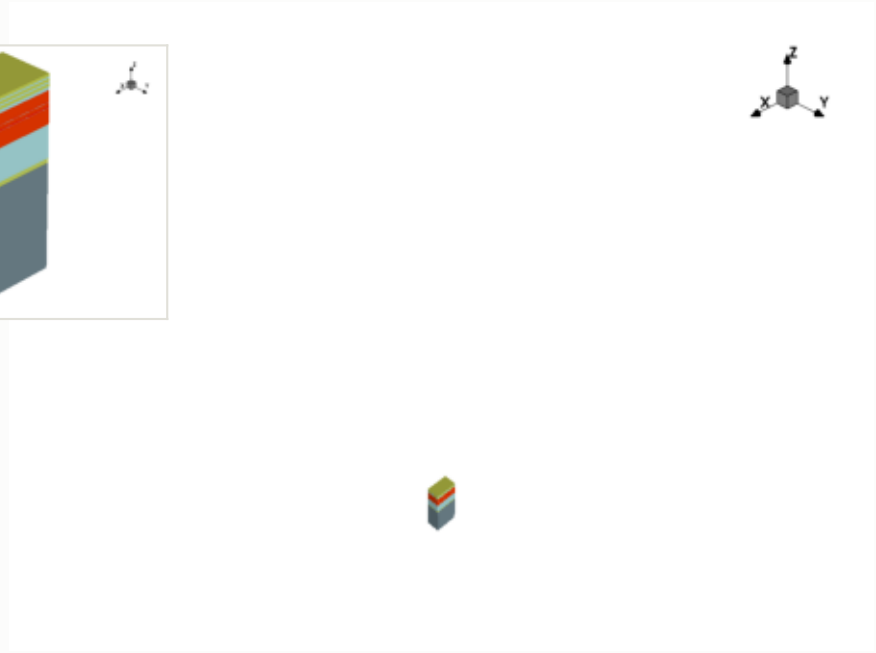

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

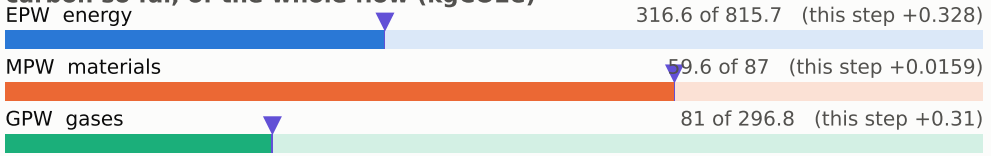

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

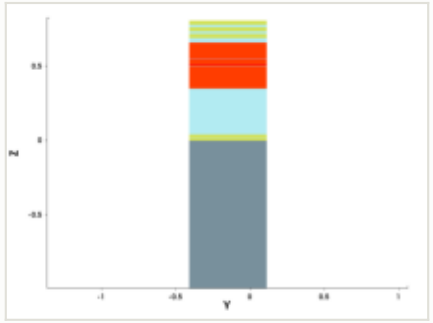

y cut at -0.150 µm

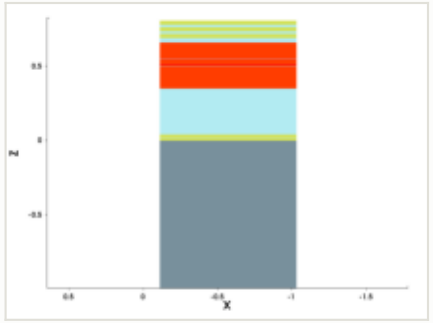

mask for this step

no mask for this step

steps by process area

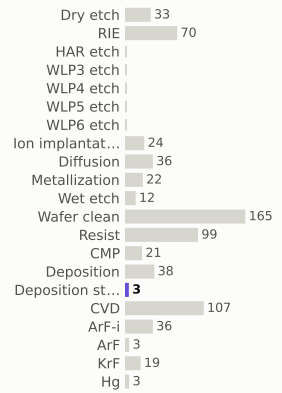

materials deposited (g)

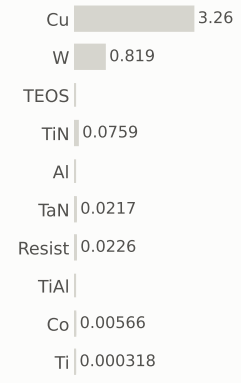

gases emitted (g)

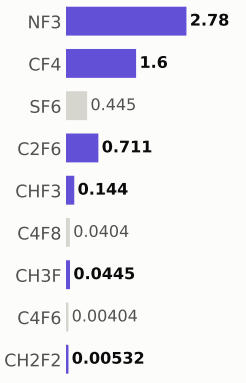

Step #14590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	457.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

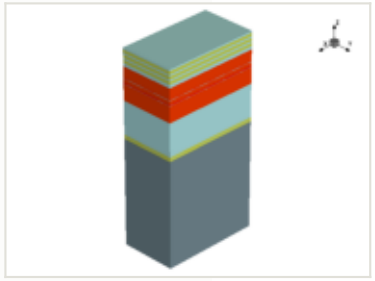

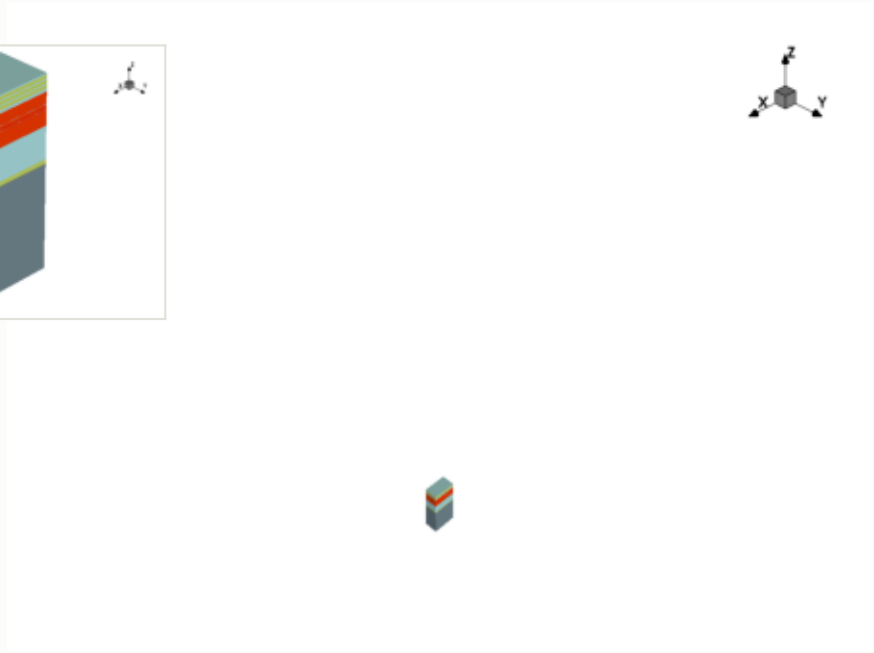

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

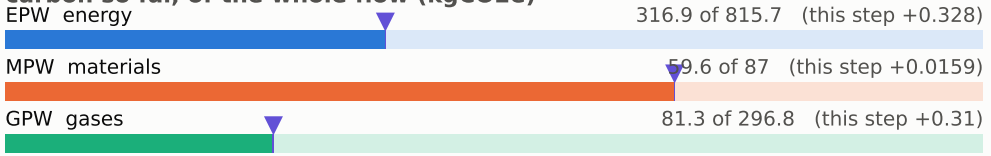

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

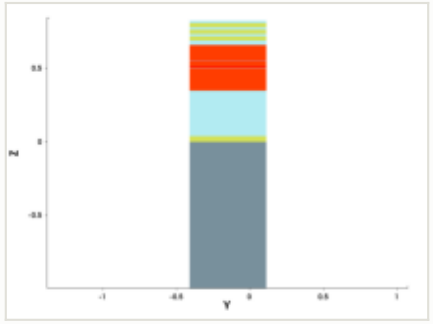

y cut at -0.150 µm

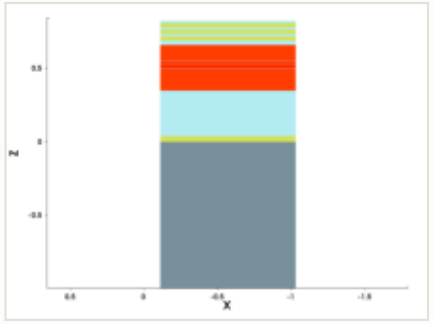

mask for this step

no mask for this step

steps by process area

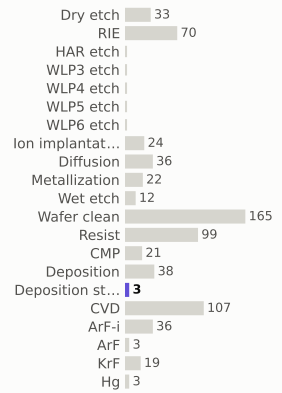

materials deposited (g)

gases emitted (g)

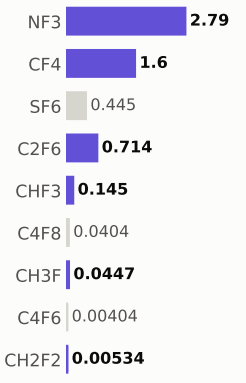

Step #14600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	458.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

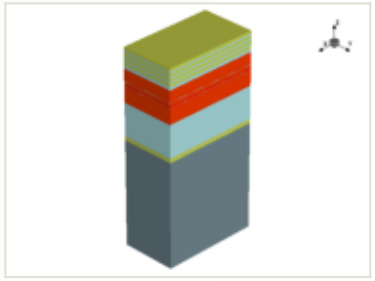

x cut at -0.570 µm

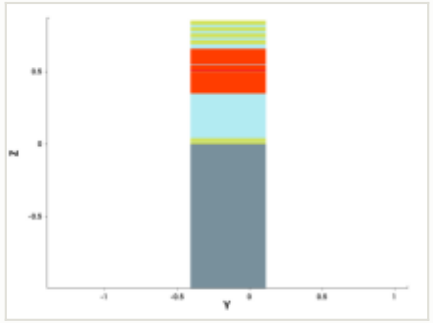

y cut at -0.150 µm

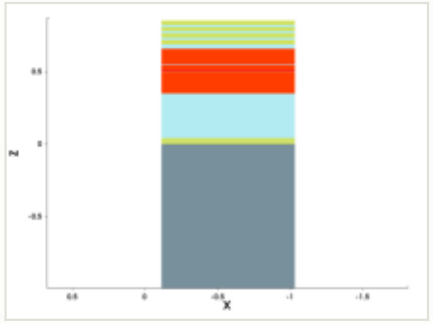

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

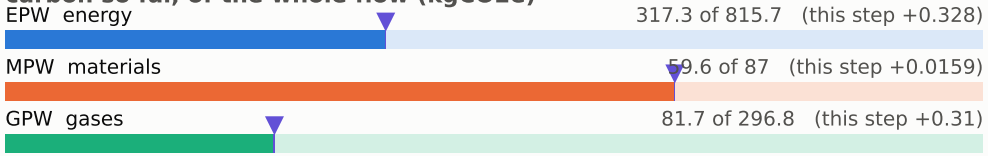

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

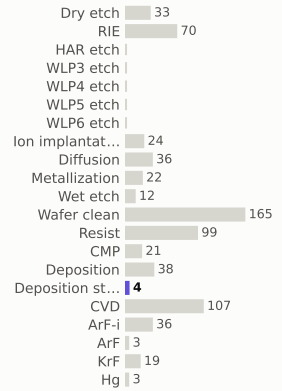

materials deposited (g)

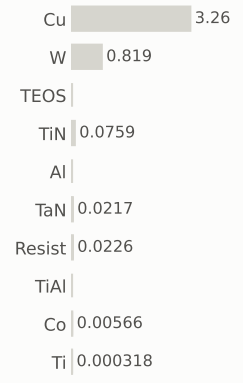

gases emitted (g)

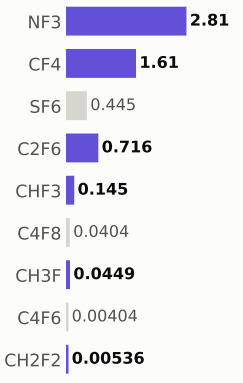

Step #14610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	459.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

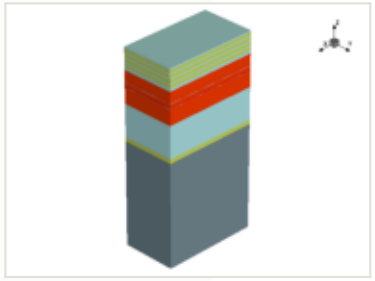

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

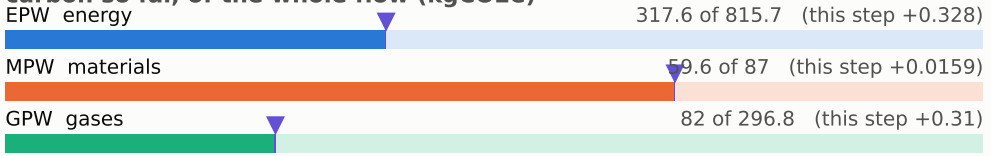

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

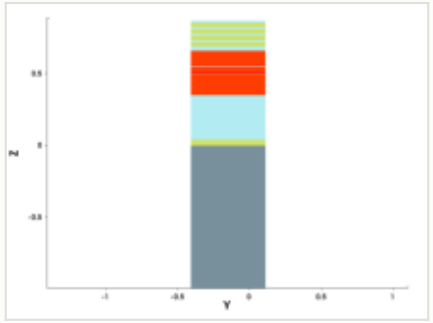

y cut at -0.150 µm

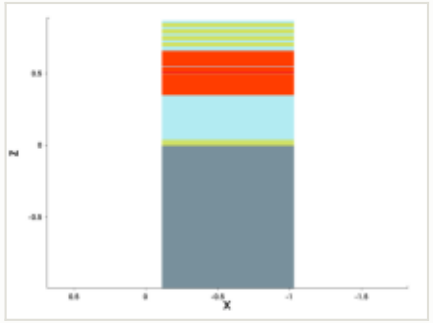

mask for this step

no mask for this step

steps by process area

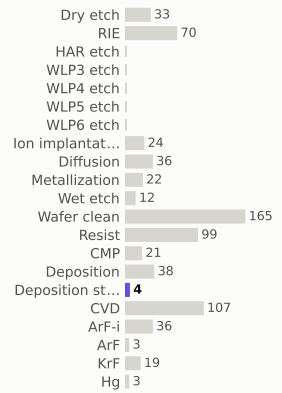

materials deposited (g)

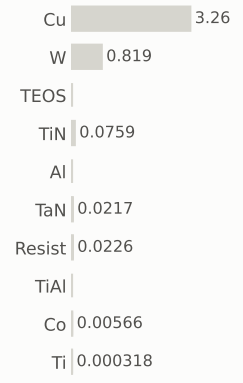

gases emitted (g)



Step #14620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	459.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

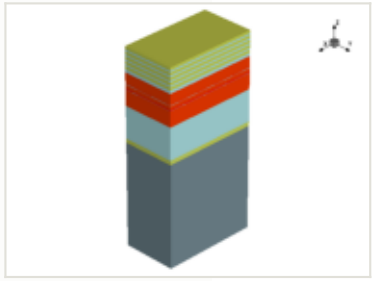

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

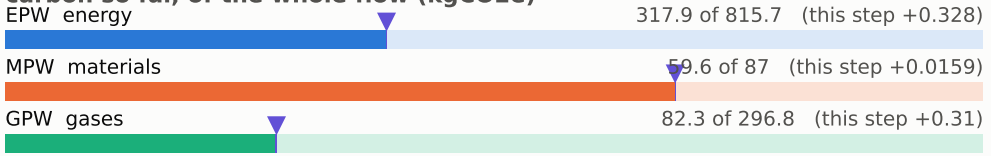

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

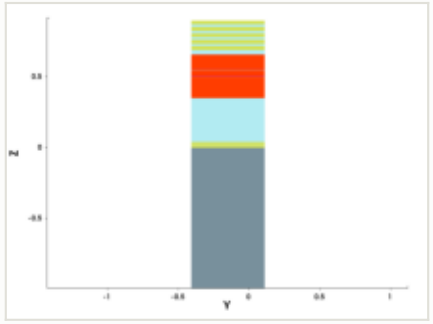

y cut at -0.150 µm

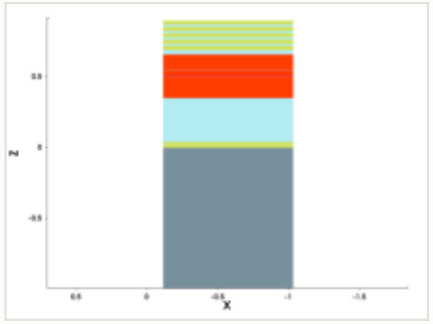

mask for this step

no mask for this step

steps by process area

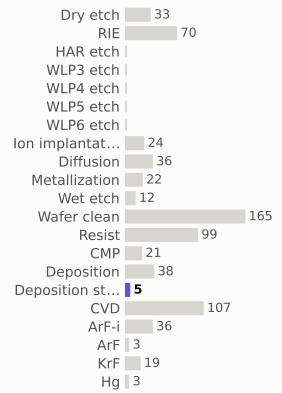

materials deposited (g)

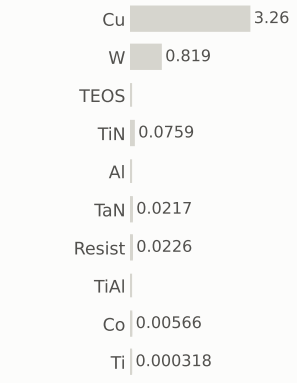

gases emitted (g)

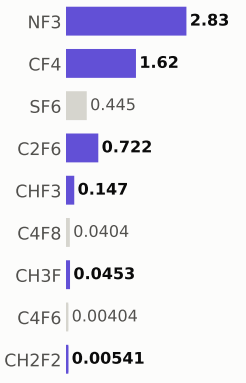

Step #14630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	460.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

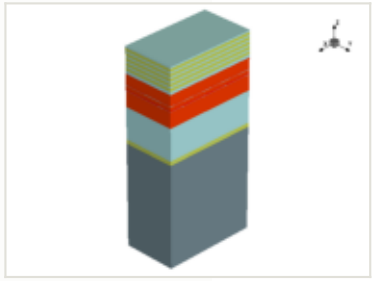

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

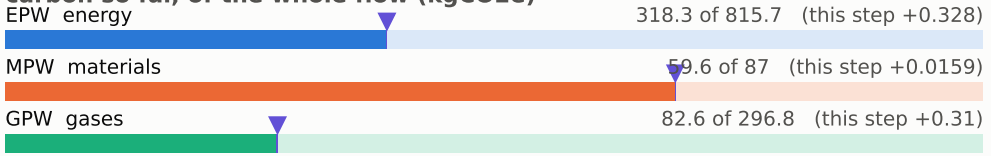

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

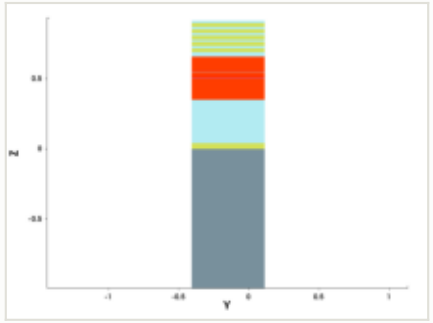

y cut at -0.150 µm

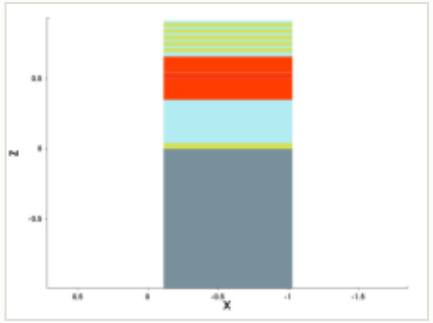

mask for this step

no mask for this step

steps by process area

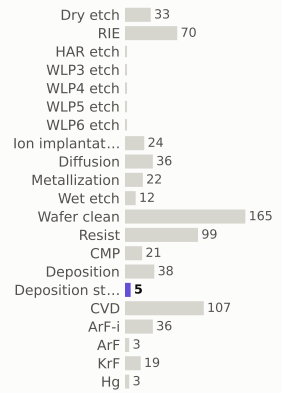

materials deposited (g)

gases emitted (g)

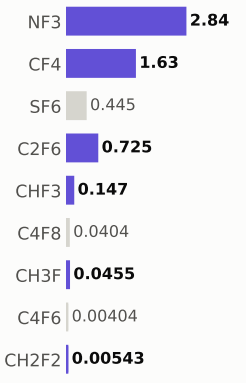

Step #14640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	461.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

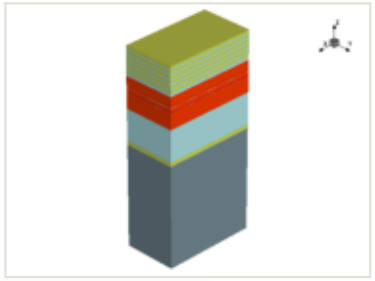

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

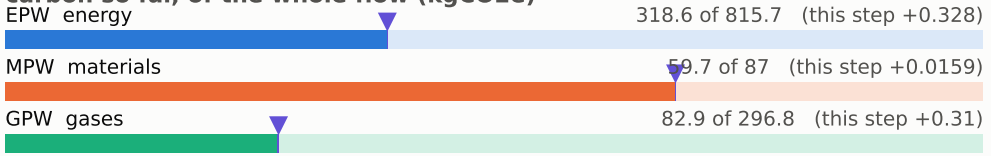

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

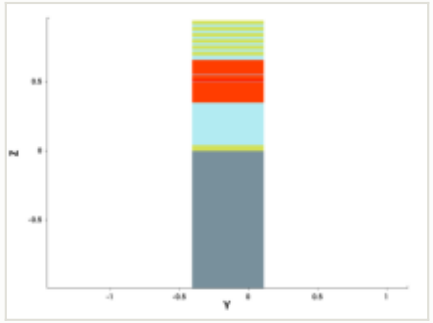

y cut at -0.150 µm

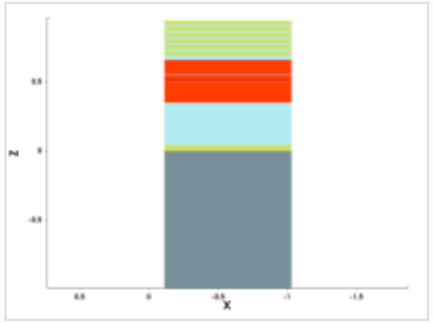

mask for this step

no mask for this step

steps by process area

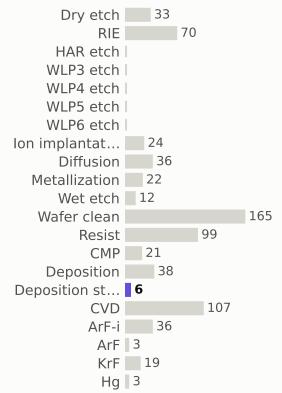

materials deposited (g)

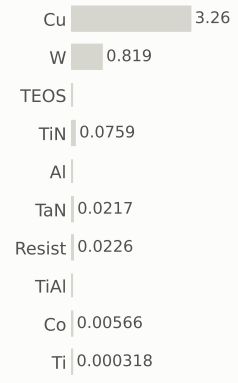

gases emitted (g)

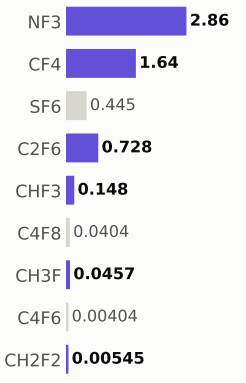

Step #14650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	461.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

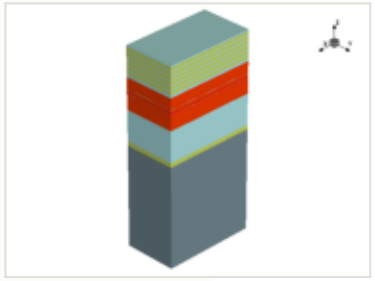

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

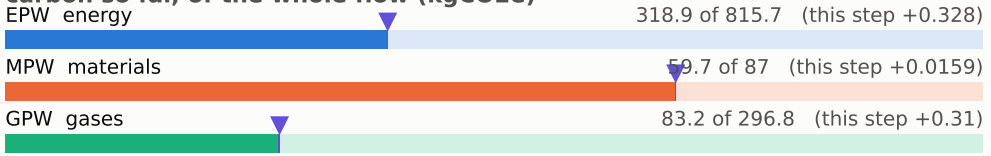

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

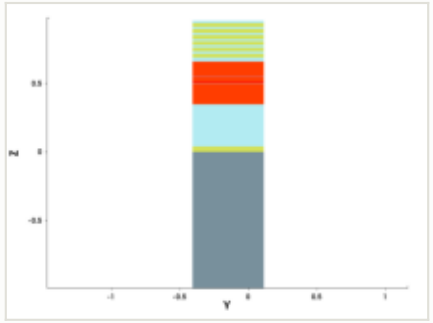

y cut at -0.150 µm

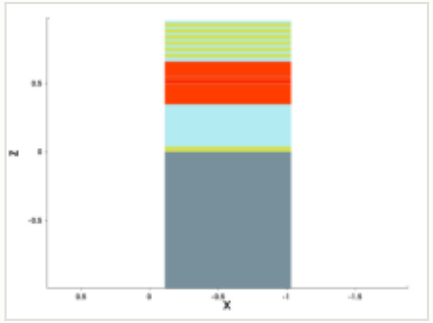

mask for this step

no mask for this step

steps by process area

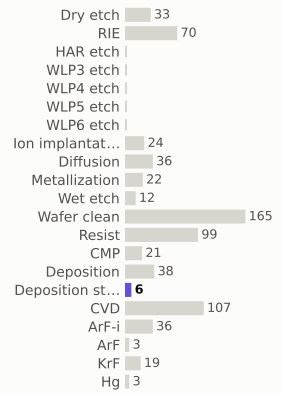

materials deposited (g)

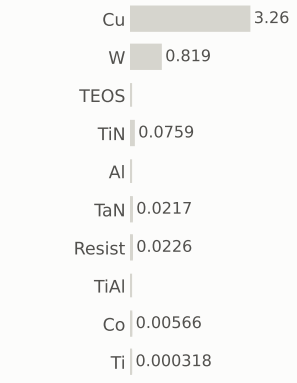

gases emitted (g)

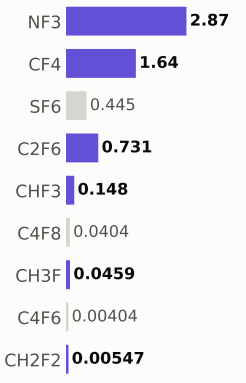

Step #14660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	462.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

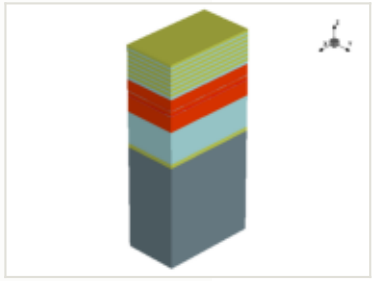

x cut at -0.570 µm

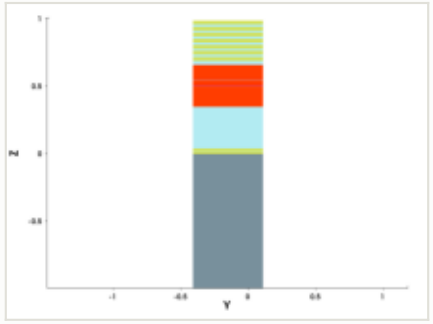

y cut at -0.150 µm

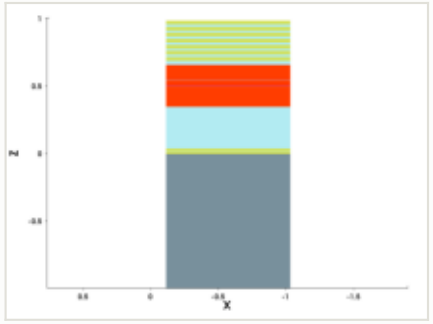

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

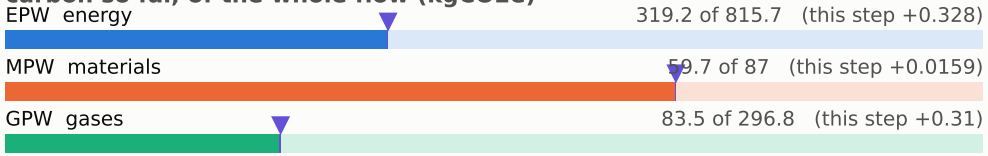

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

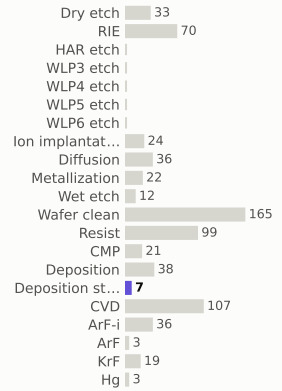

materials deposited (g)

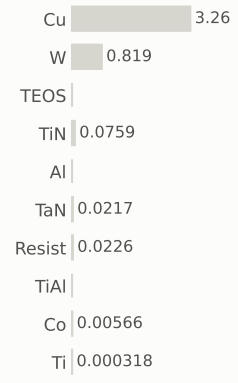

gases emitted (g)

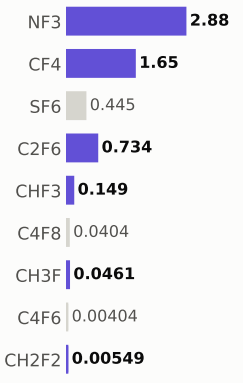

Step #14670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	463.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

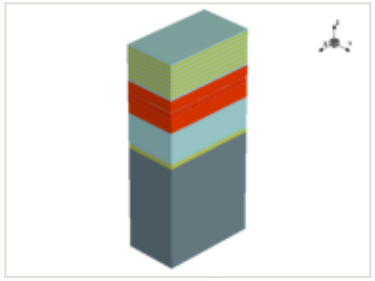

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

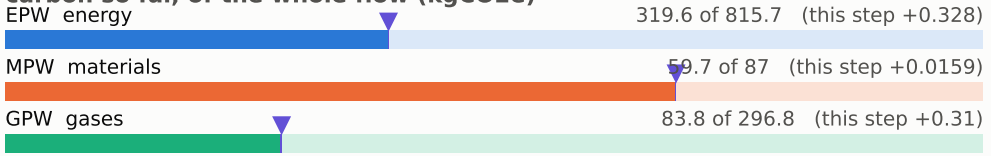

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

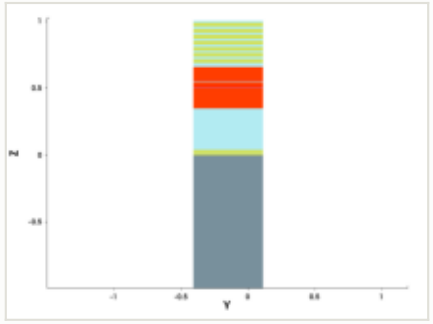

y cut at -0.150 µm

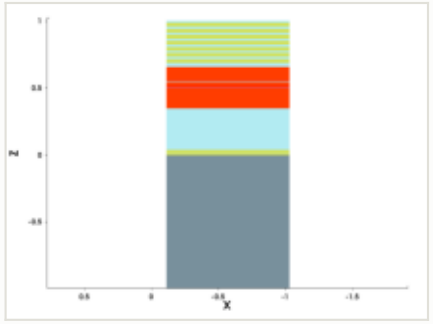

mask for this step

no mask for this step

steps by process area

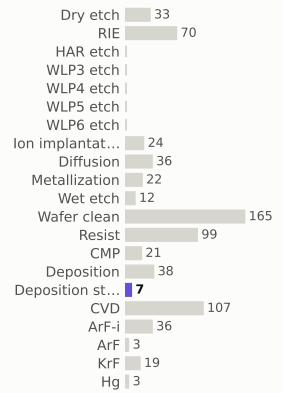

materials deposited (g)

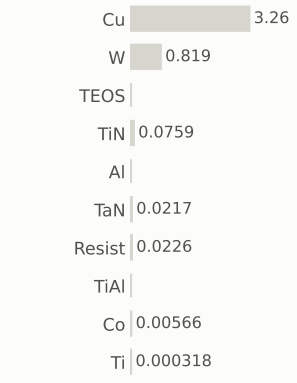

gases emitted (g)

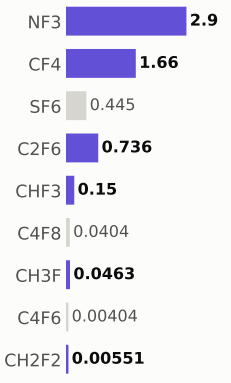

Step #14680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	463.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

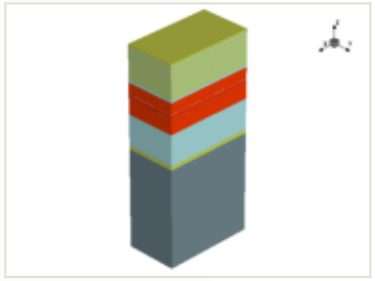

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

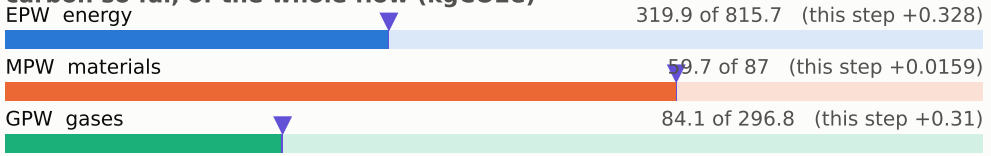

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

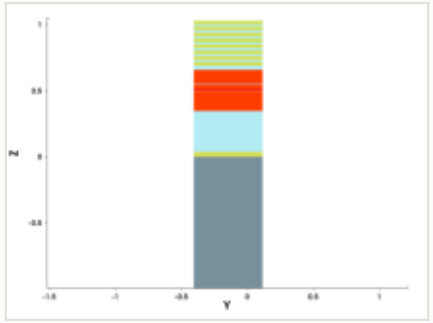

y cut at -0.150 µm

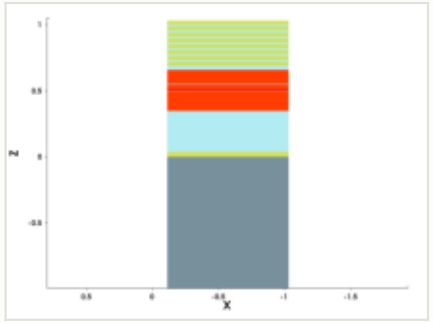

mask for this step

no mask for this step

steps by process area

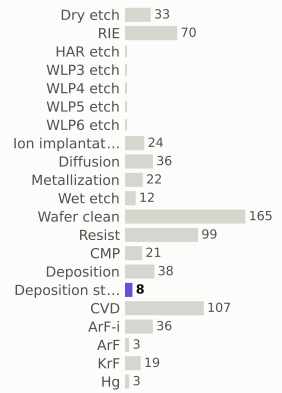

materials deposited (g)

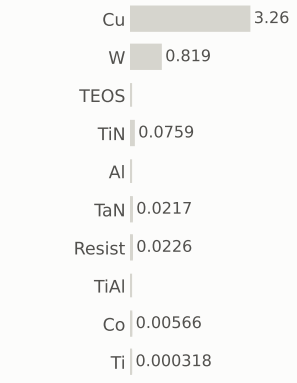

gases emitted (g)

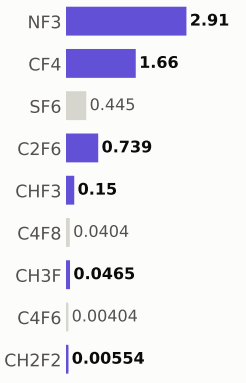

Step #14690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	464.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

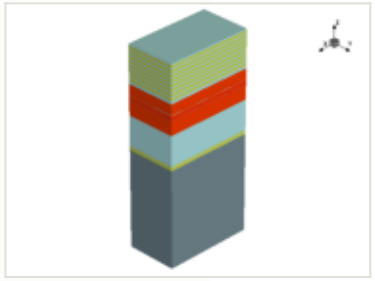

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

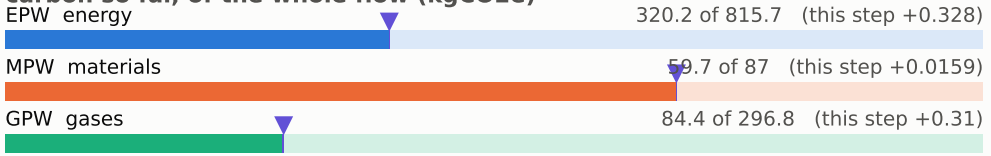

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

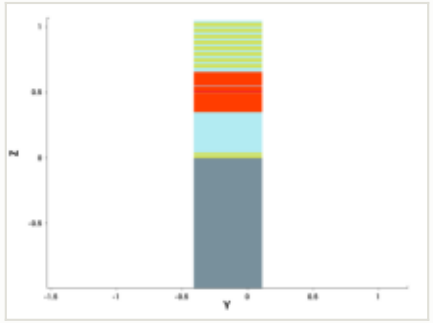

y cut at -0.150 µm

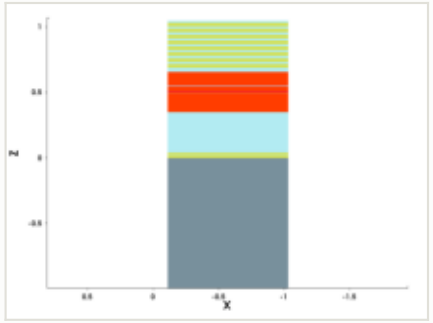

mask for this step

no mask for this step

steps by process area

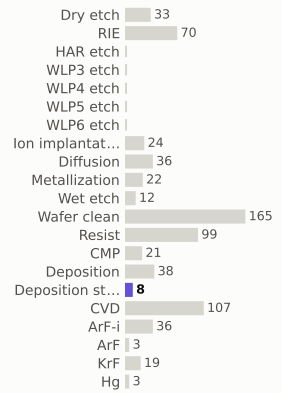

materials deposited (g)

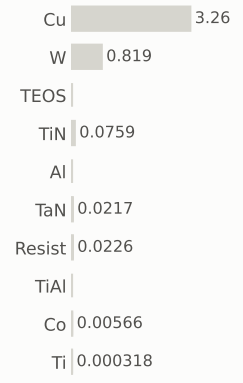

gases emitted (g)

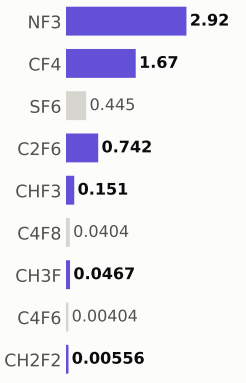

Step #14700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	465.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

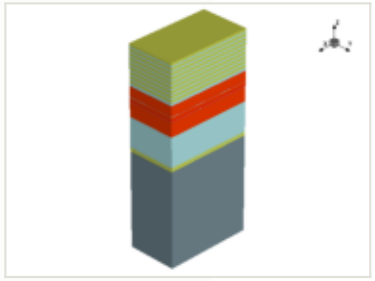

x cut at -0.570 µm

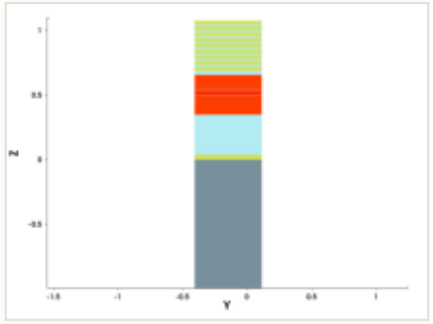

y cut at -0.150 µm

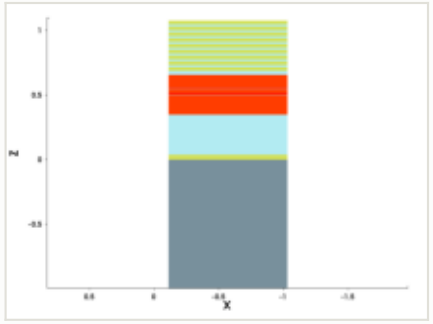

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

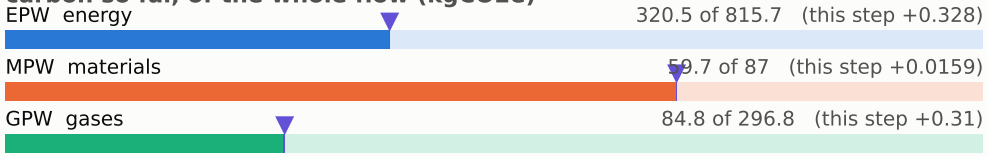

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

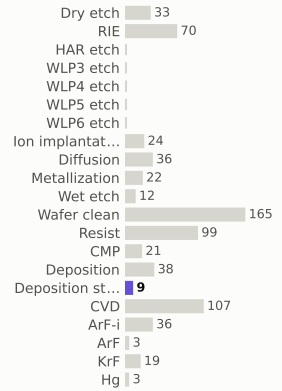

materials deposited (g)

gases emitted (g)

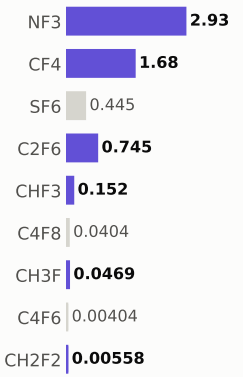

Step #14710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	465.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

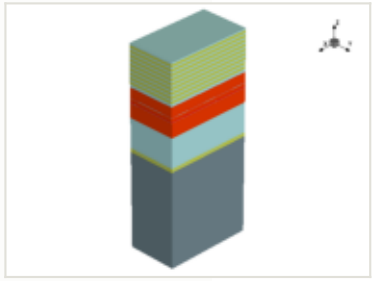

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

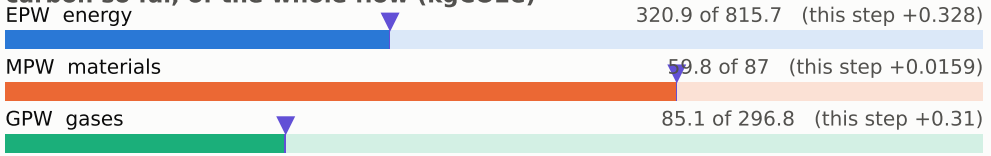

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

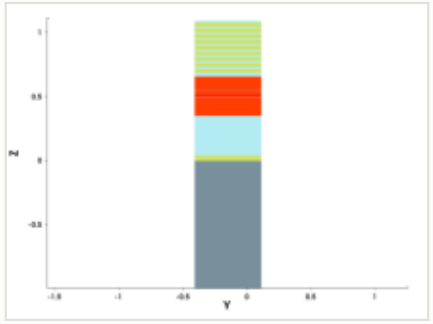

y cut at -0.150 µm

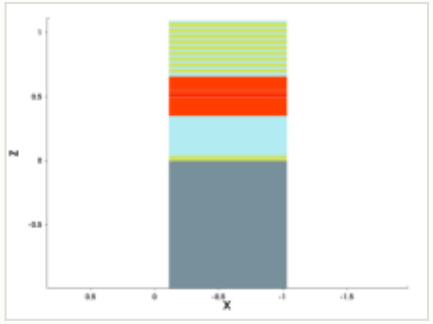

mask for this step

no mask for this step

steps by process area

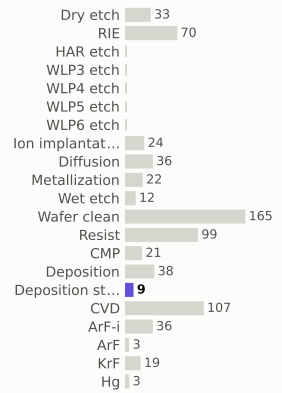

materials deposited (g)

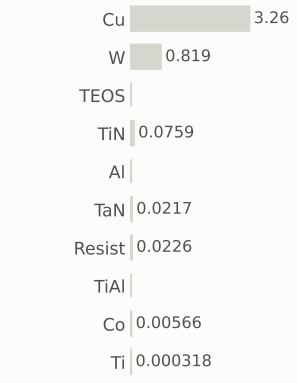

gases emitted (g)

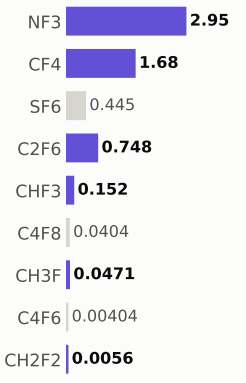

Step #14720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	466.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

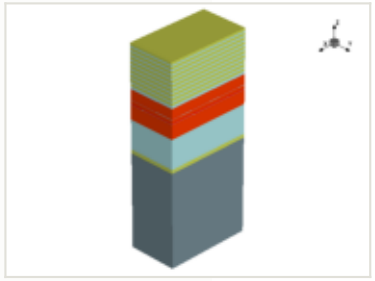

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

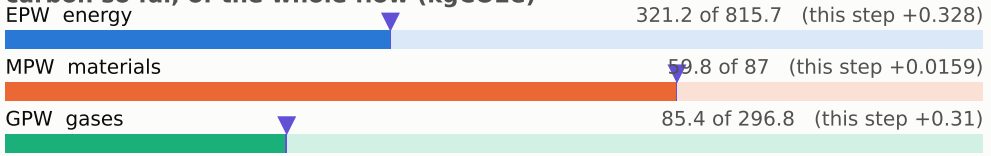

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

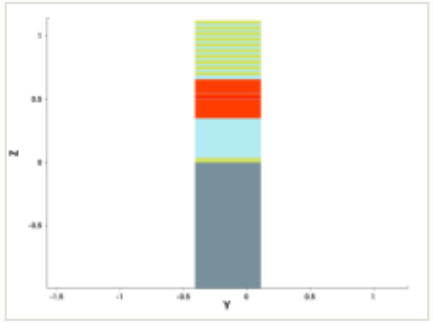

y cut at -0.150 µm

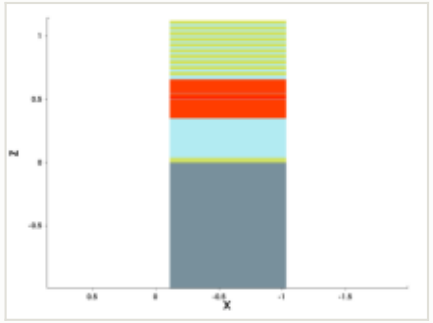

mask for this step

no mask for this step

steps by process area

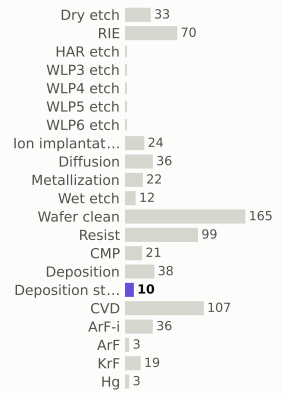

materials deposited (g)

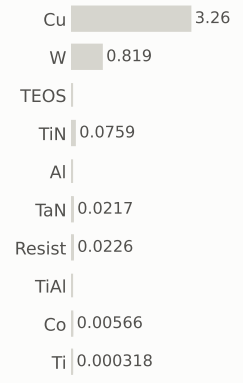

gases emitted (g)

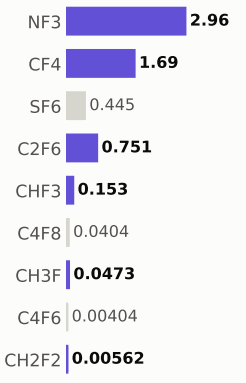

Step #14730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	467.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

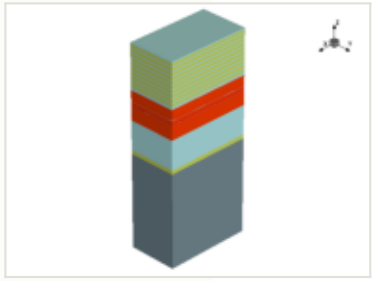

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

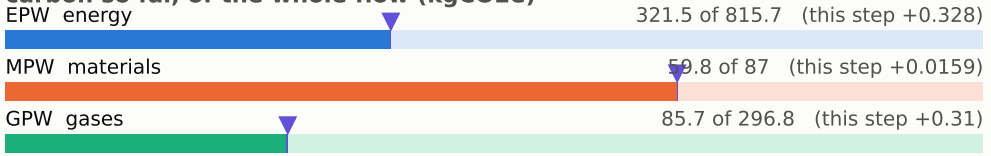

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

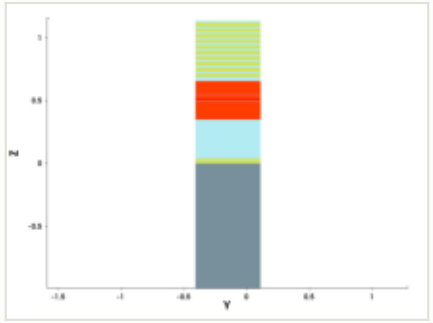

y cut at -0.150 µm

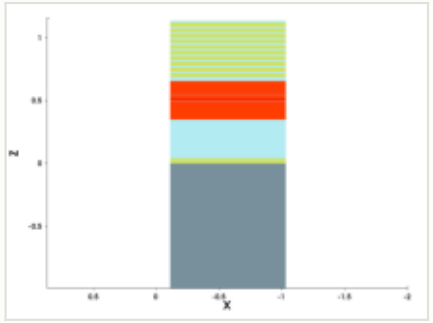

mask for this step

no mask for this step

steps by process area

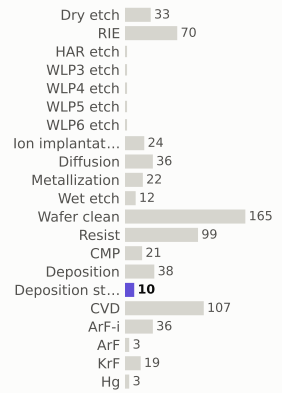

materials deposited (g)

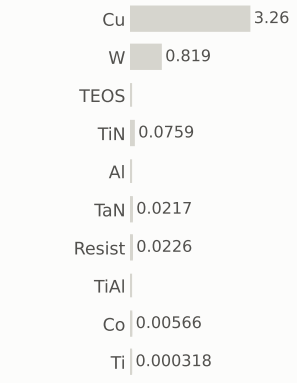

gases emitted (g)

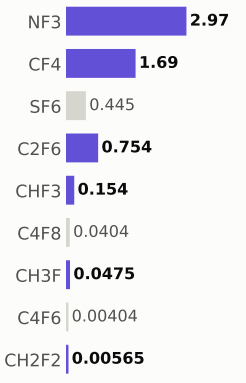

Step #14740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	467.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

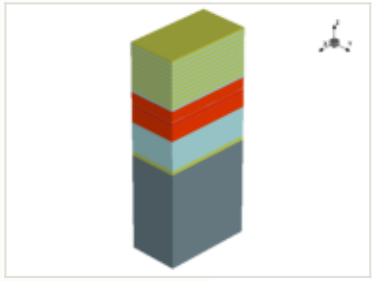

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

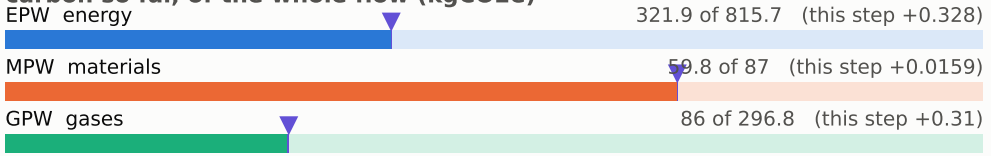

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

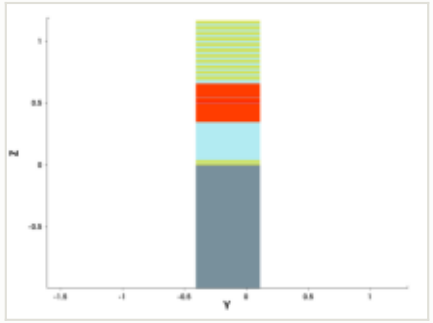

y cut at -0.150 µm

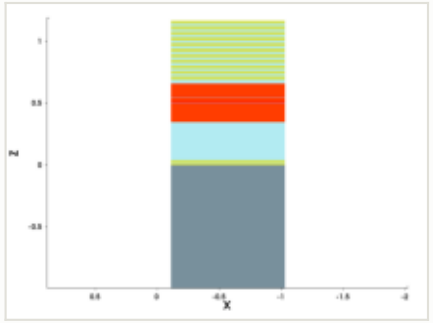

mask for this step

no mask for this step

steps by process area

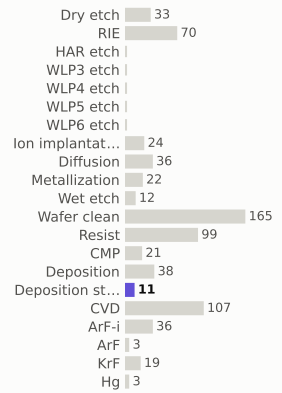

materials deposited (g)

gases emitted (g)

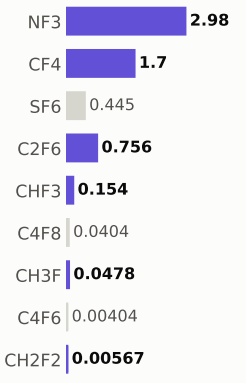

Step #14750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	468.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

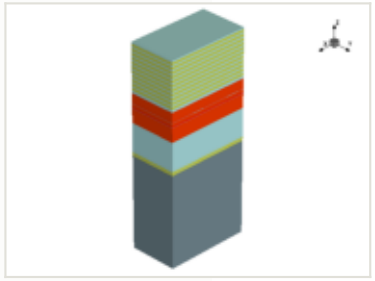

x cut at -0.570 µm

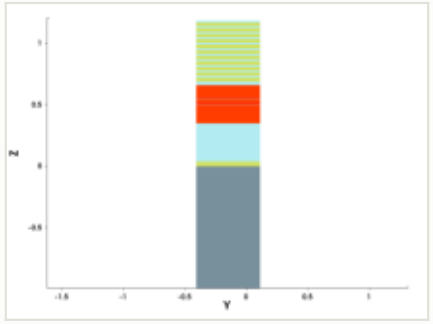

y cut at -0.150 µm

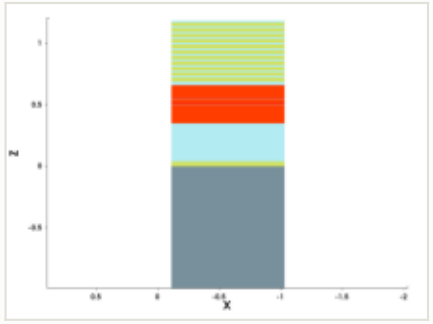

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

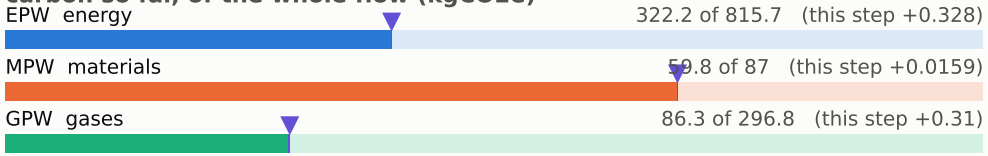

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

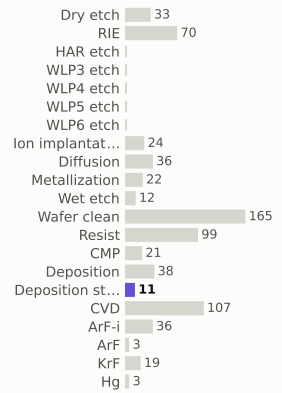

materials deposited (g)

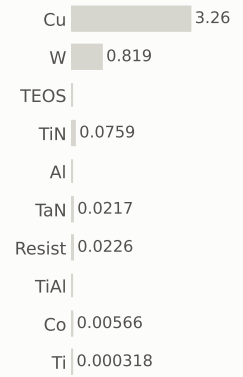

gases emitted (g)



Step #14760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	469.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

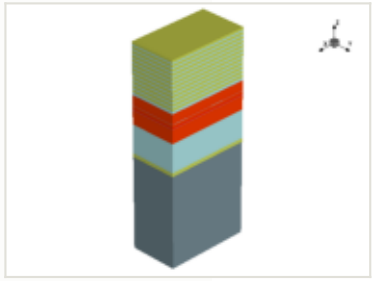

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

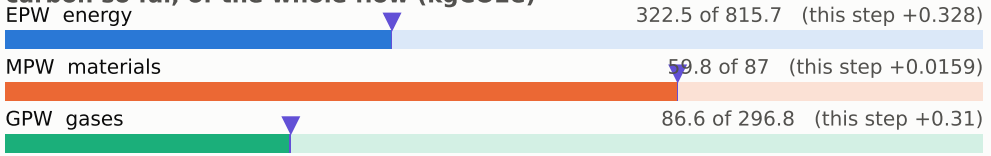

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

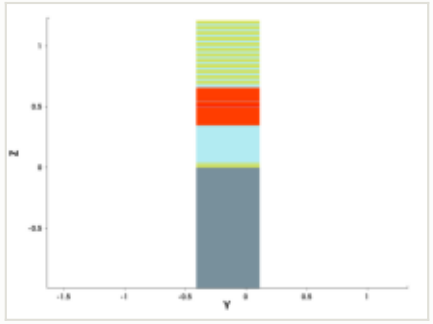

y cut at -0.150 µm

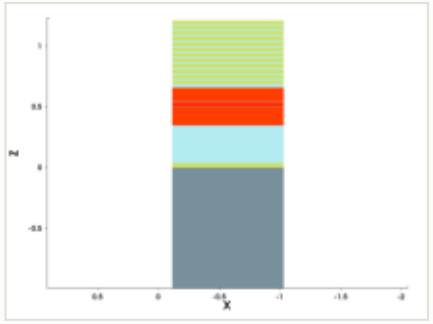

mask for this step

no mask for this step

steps by process area

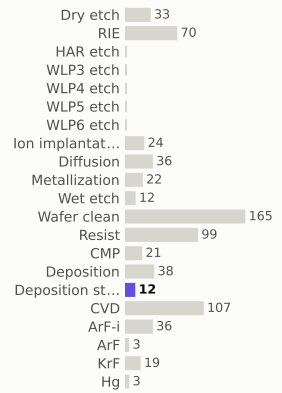

materials deposited (g)

gases emitted (g)

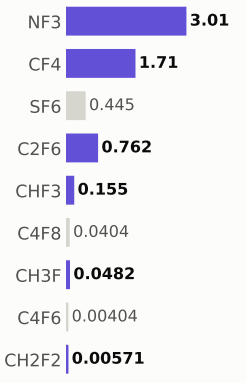

Step #14770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	469.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

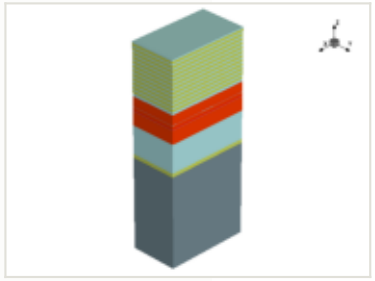

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

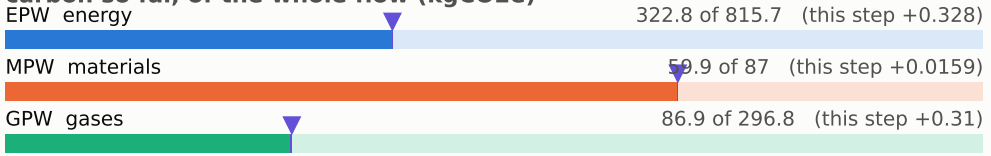

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

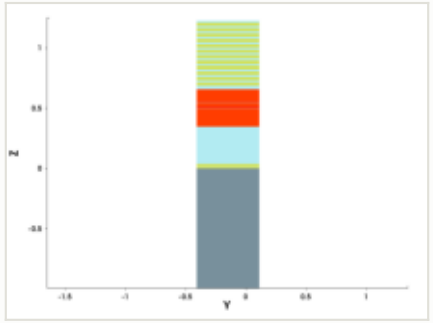

y cut at -0.150 µm

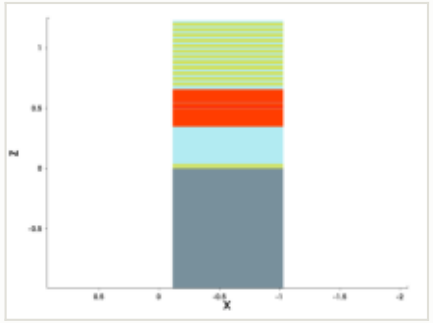

mask for this step

no mask for this step

steps by process area

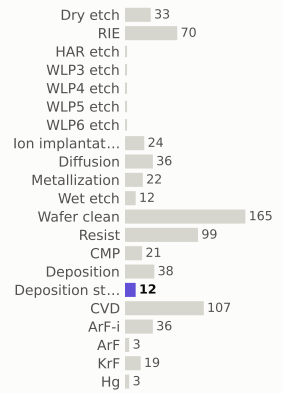

materials deposited (g)

gases emitted (g)

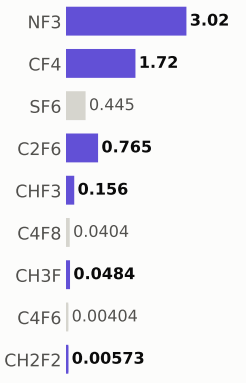

Step #14780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	470.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

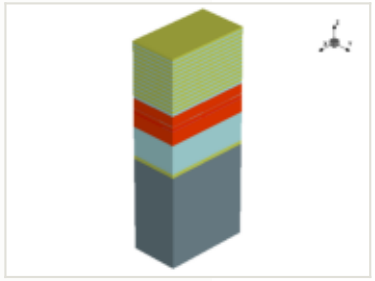

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

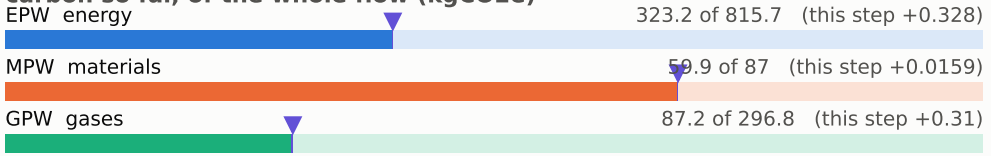

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

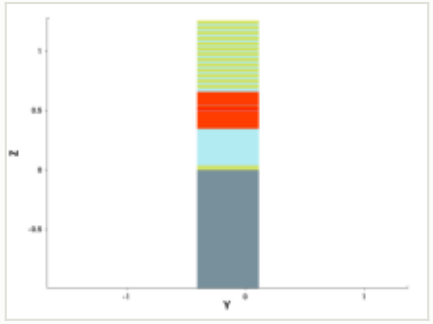

y cut at -0.150 µm

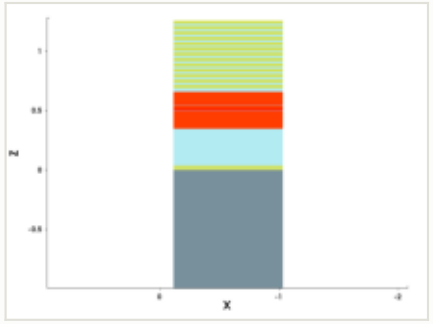

mask for this step

no mask for this step

steps by process area

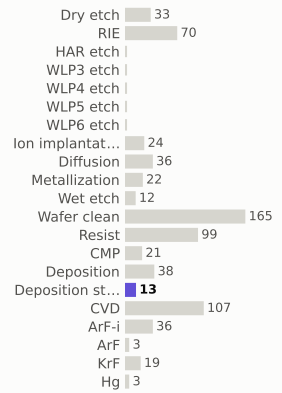

materials deposited (g)

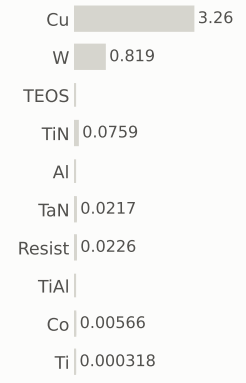

gases emitted (g)

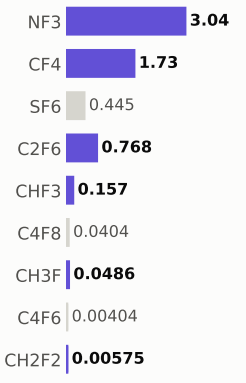

Step #14790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	470.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

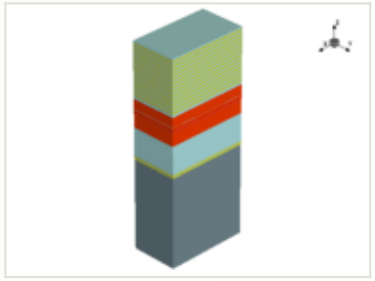

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

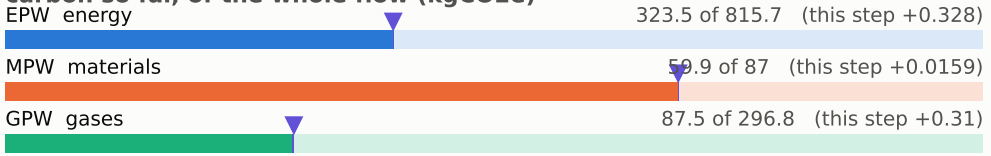

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

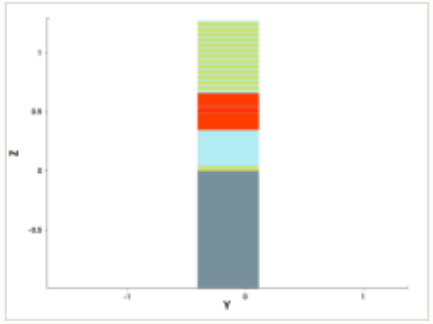

y cut at -0.150 µm

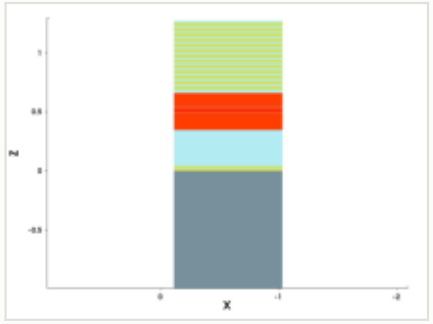

mask for this step

no mask for this step

steps by process area

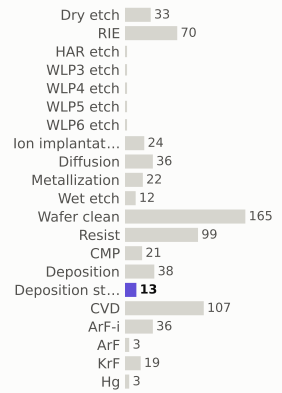

materials deposited (g)

gases emitted (g)

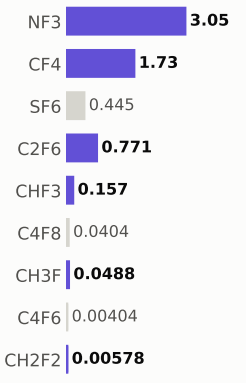

Step #14800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	471.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

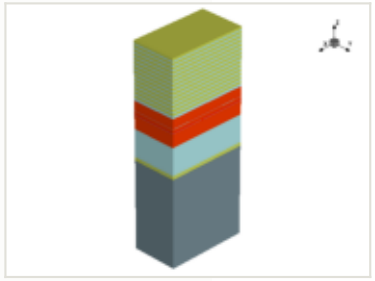

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

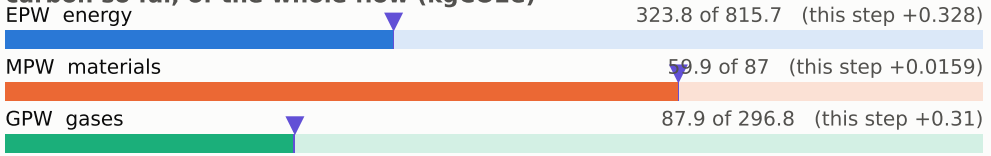

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

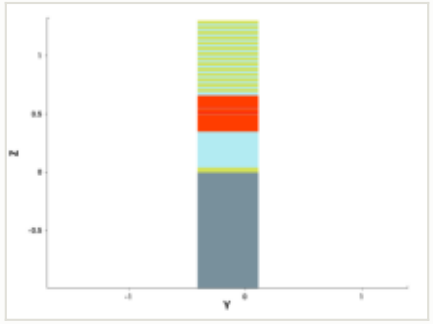

y cut at -0.150 µm

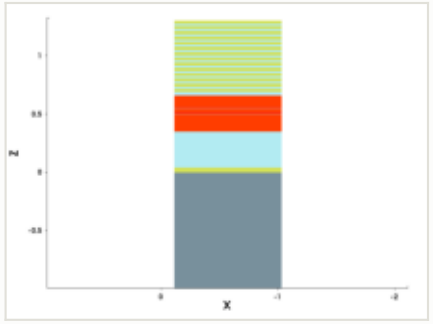

mask for this step

no mask for this step

steps by process area

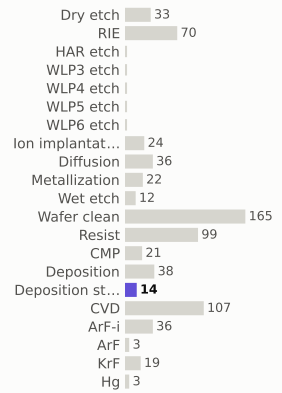

materials deposited (g)

gases emitted (g)

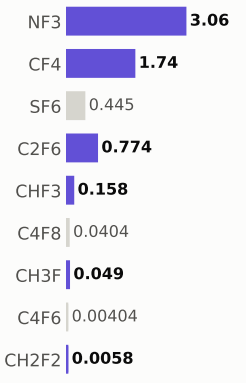

Step #14810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	472.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

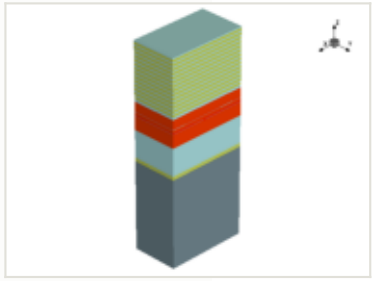

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

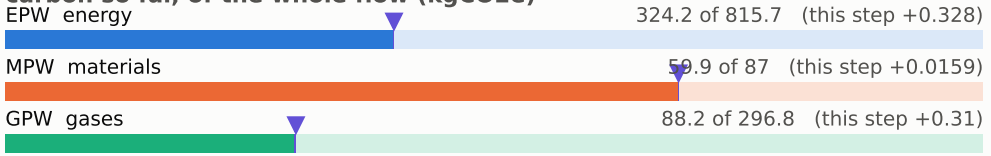

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

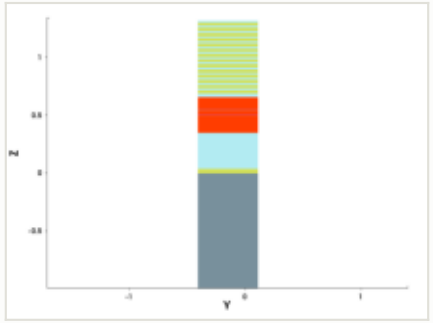

y cut at -0.150 µm

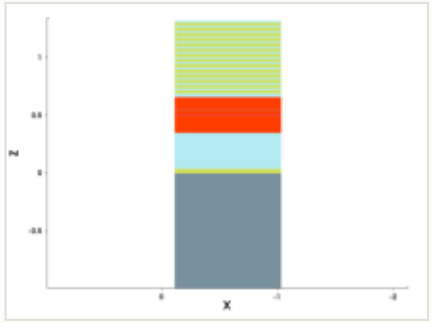

mask for this step

no mask for this step

steps by process area

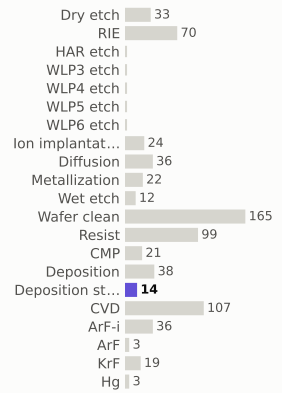

materials deposited (g)

gases emitted (g)

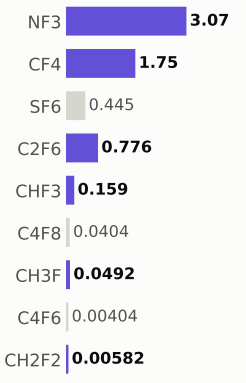

Step #14820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	472.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

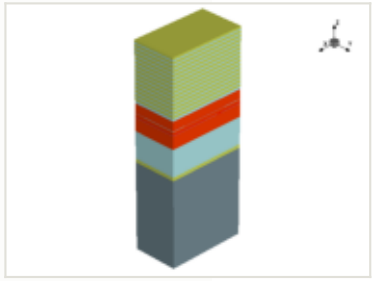

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

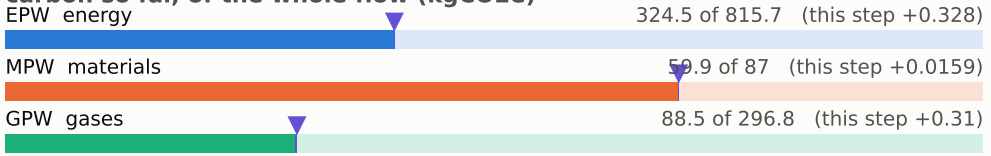

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

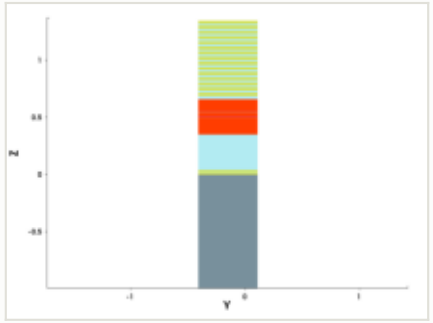

y cut at -0.150 µm

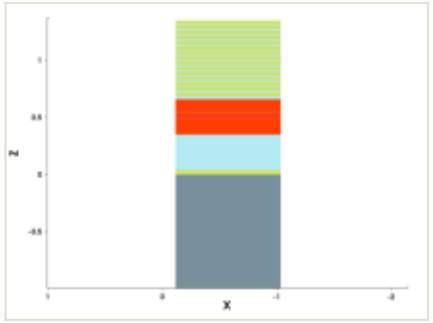

mask for this step

no mask for this step

steps by process area

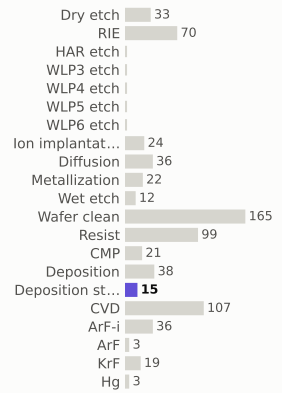

materials deposited (g)

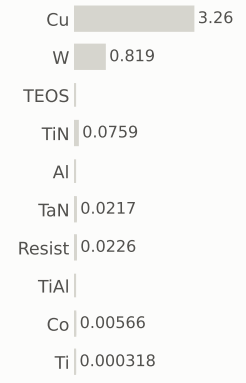

gases emitted (g)

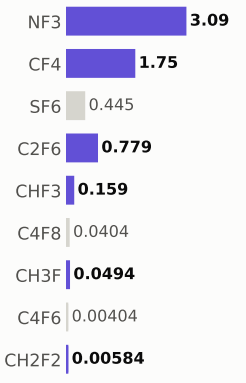

Step #14830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	473.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

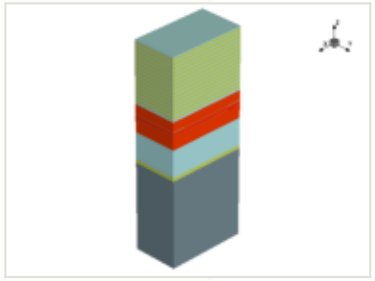

x cut at -0.570 µm

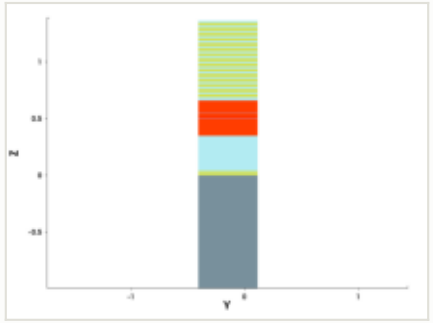

y cut at -0.150 µm

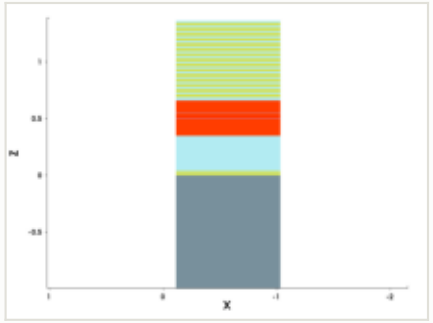

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

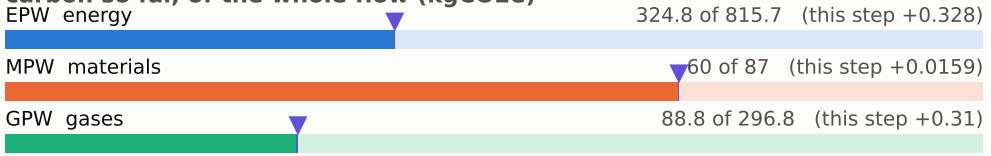

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

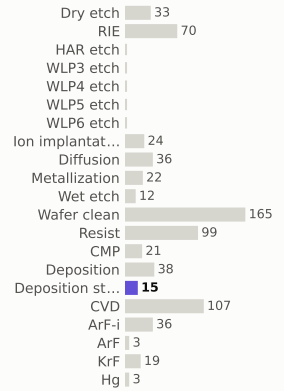

materials deposited (g)

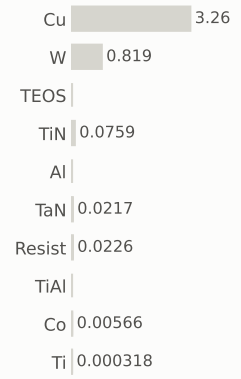

gases emitted (g)

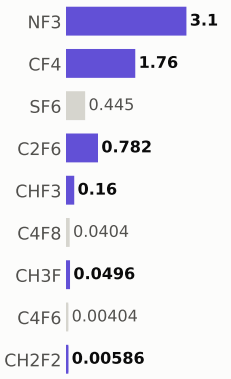

Step #14840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	474.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

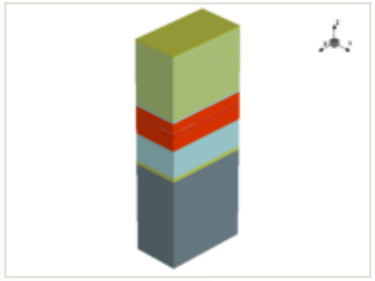

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

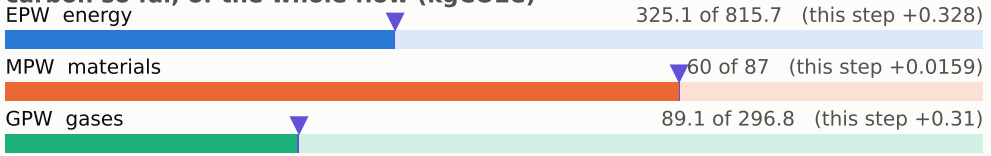

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

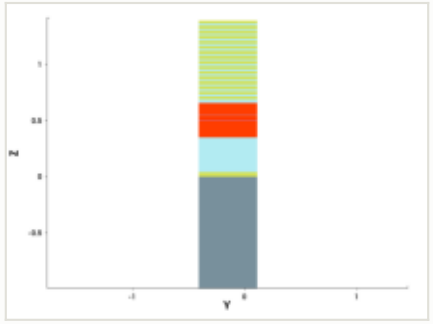

y cut at -0.150 µm

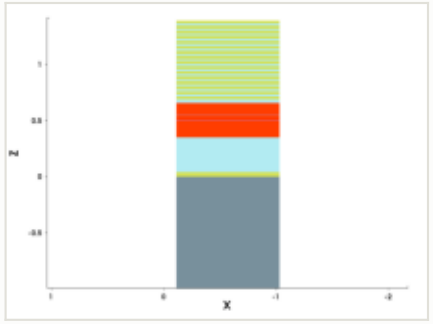

mask for this step

no mask for this step

steps by process area

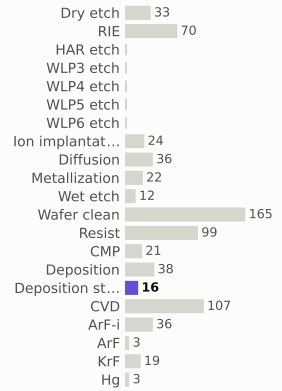

materials deposited (g)

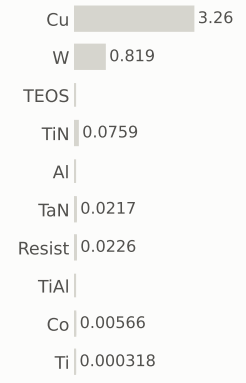

gases emitted (g)

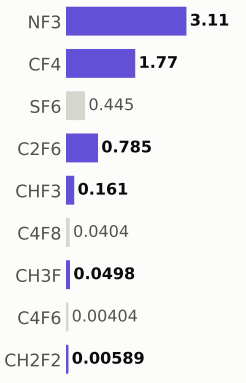

Step #14850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	474.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

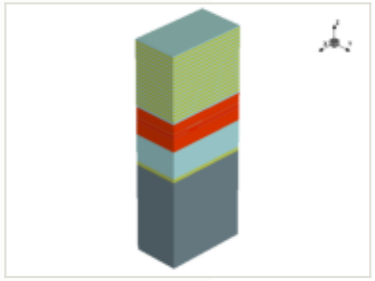

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

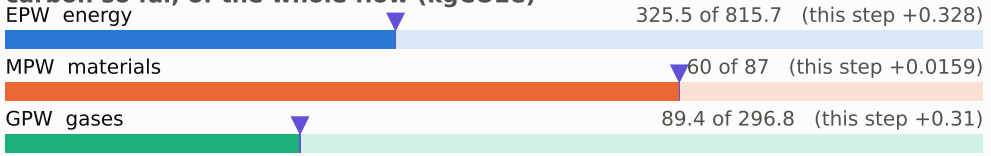

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

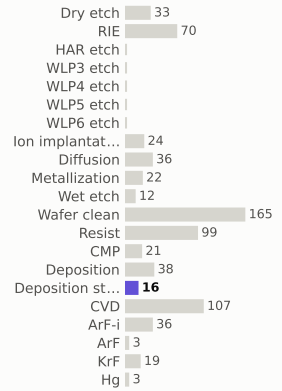

materials deposited (g)

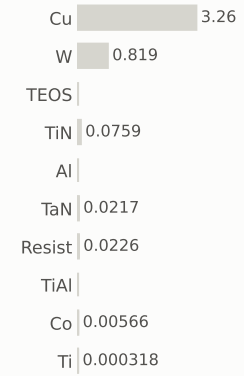

gases emitted (g)

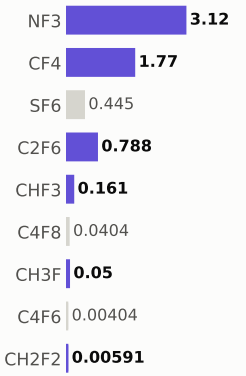

x cut at -0.570 µm

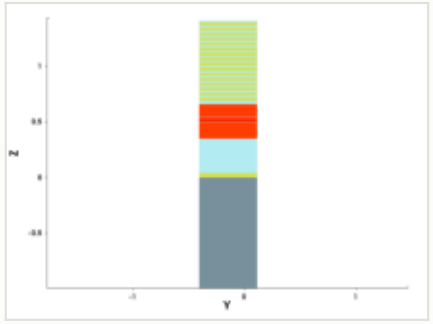

y cut at -0.150 µm

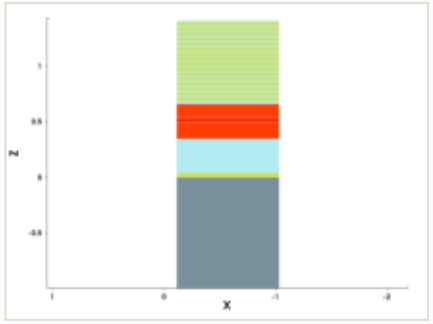

mask for this step

no mask for this step

Step #14860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	475.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

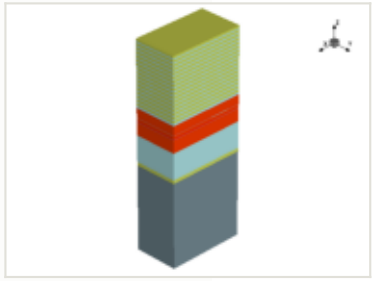

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

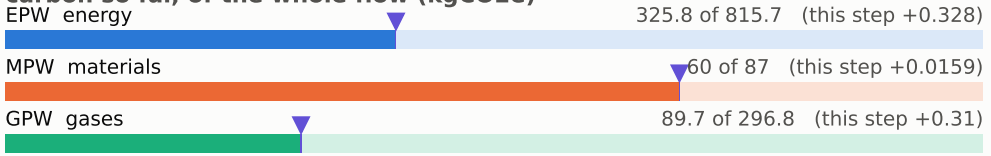

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

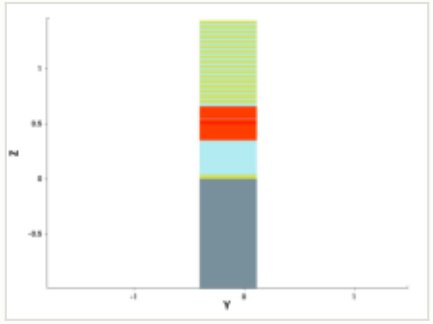

y cut at -0.150 µm

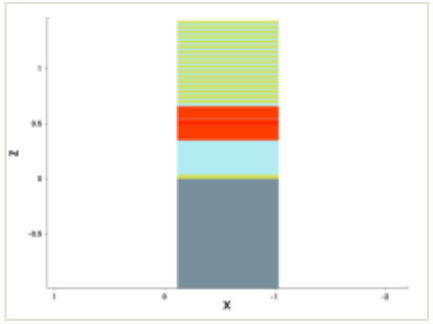

mask for this step

no mask for this step

steps by process area

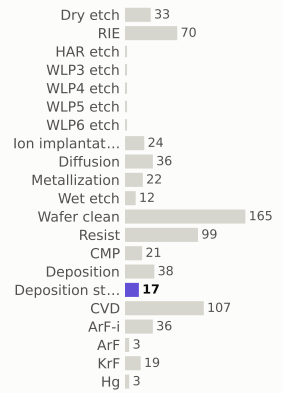

materials deposited (g)

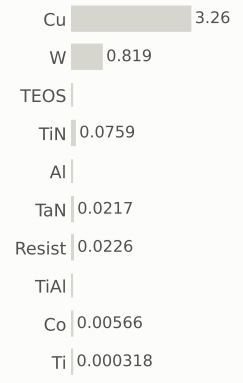

gases emitted (g)

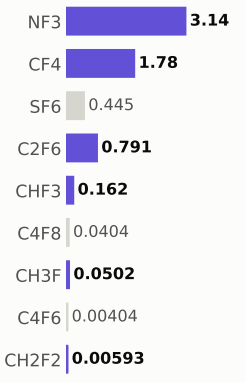

Step #14870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	476.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

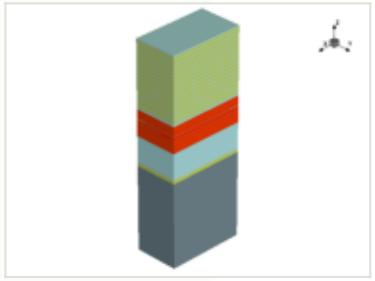

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

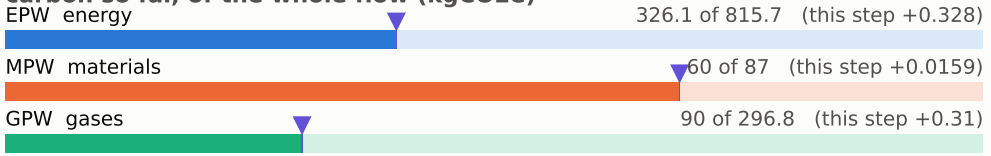

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

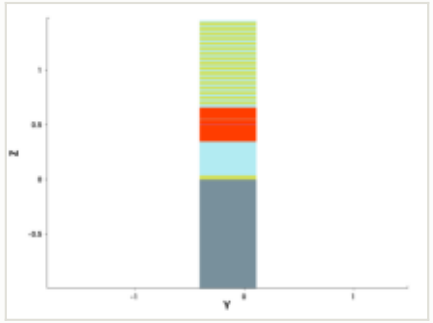

y cut at -0.150 µm

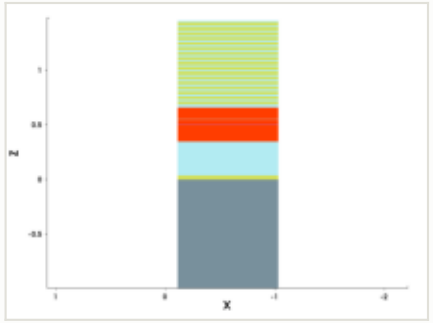

mask for this step

no mask for this step

steps by process area

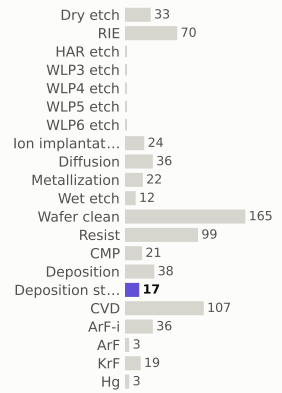

materials deposited (g)

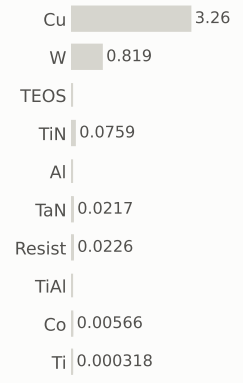

gases emitted (g)

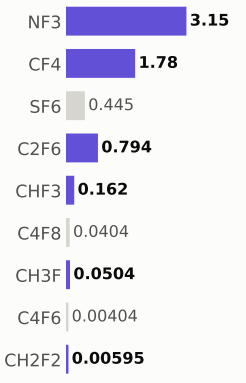

Step #14880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	476.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

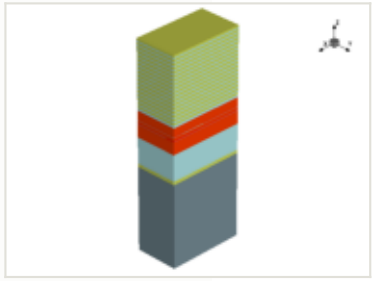

x cut at -0.570 µm

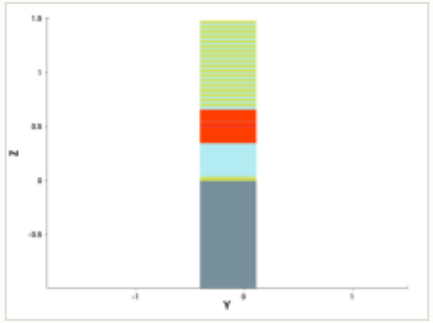

y cut at -0.150 µm

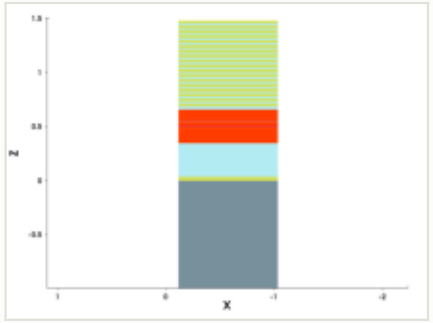

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

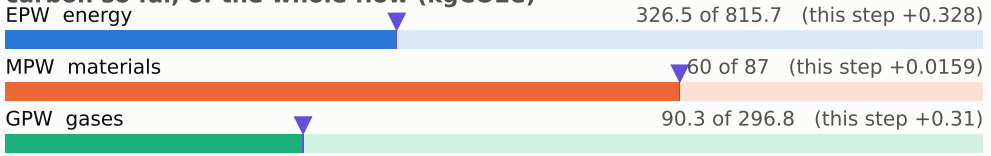

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

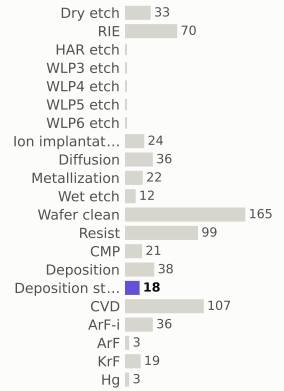

materials deposited (g)

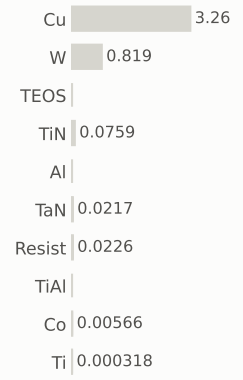

gases emitted (g)

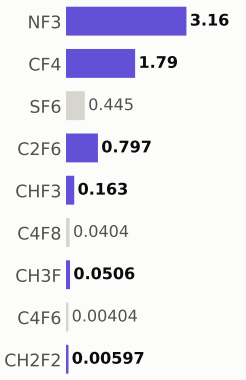

Step #14890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	477.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

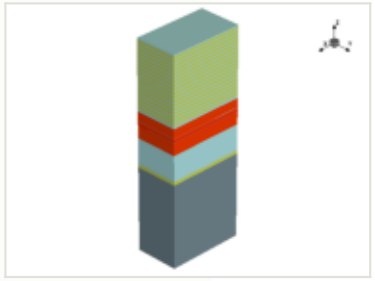

x cut at -0.570 µm

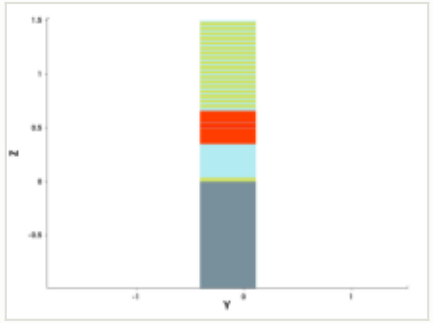

y cut at -0.150 µm

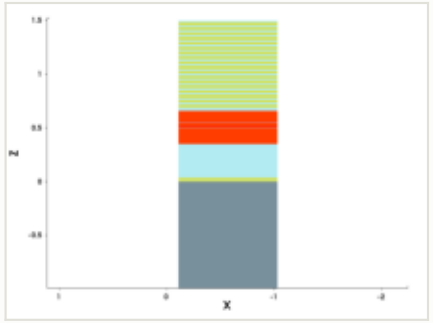

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

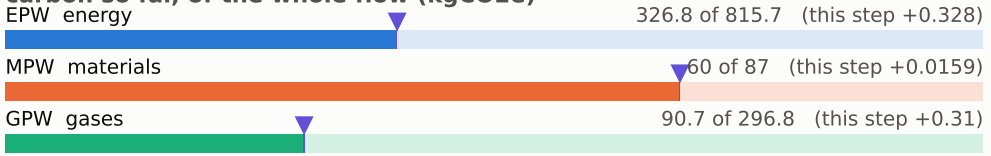

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

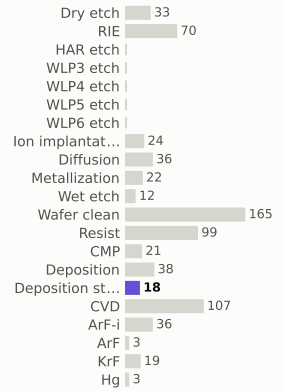

materials deposited (g)

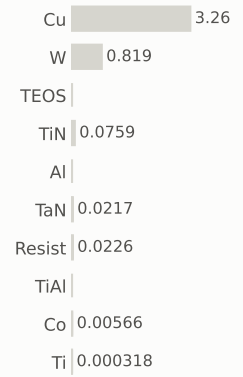

gases emitted (g)

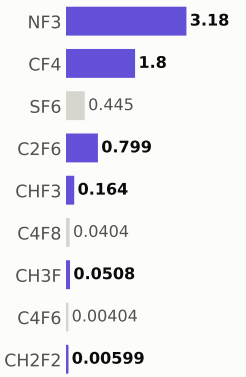

Step #14900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	478.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

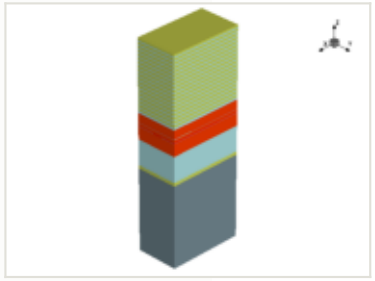

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

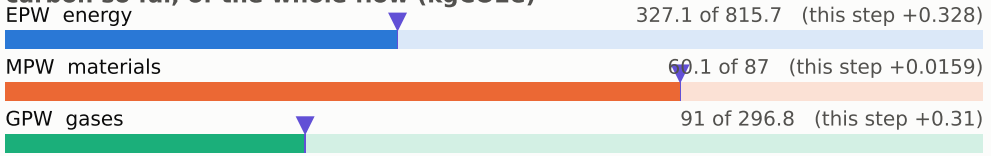

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

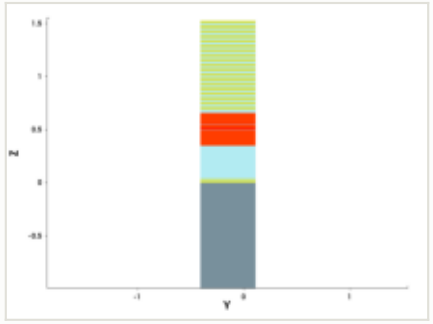

y cut at -0.150 µm

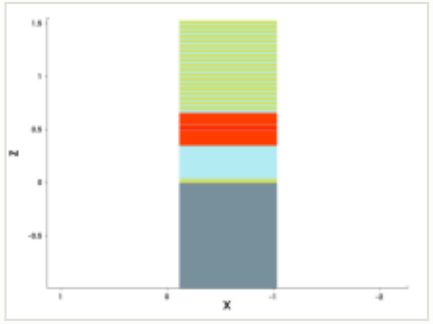

mask for this step

no mask for this step

steps by process area

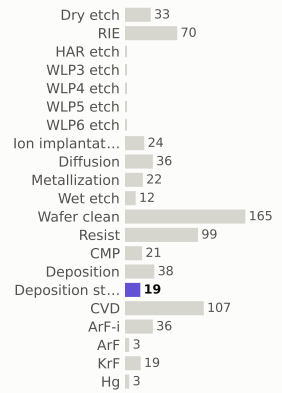

materials deposited (g)

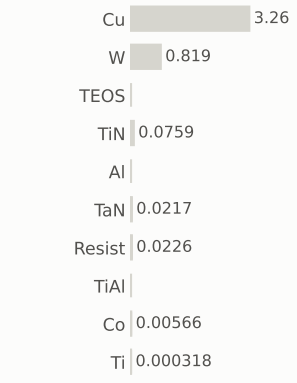

gases emitted (g)

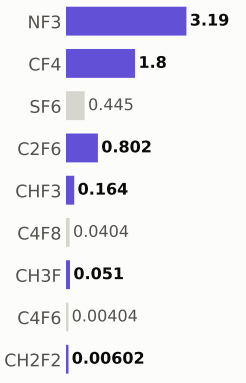

Step #14910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	478.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

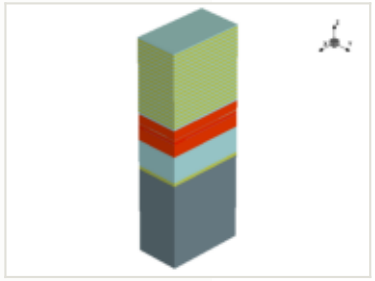

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

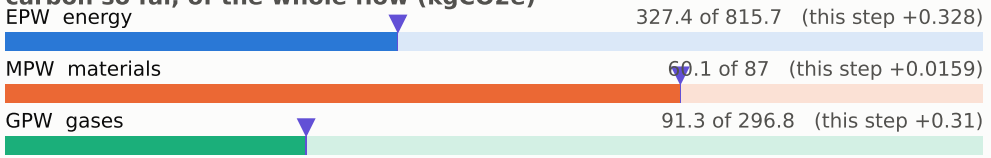

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

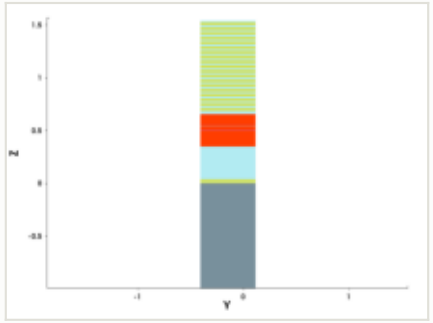

y cut at -0.150 µm

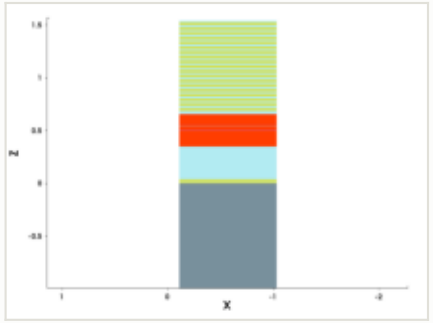

mask for this step

no mask for this step

steps by process area

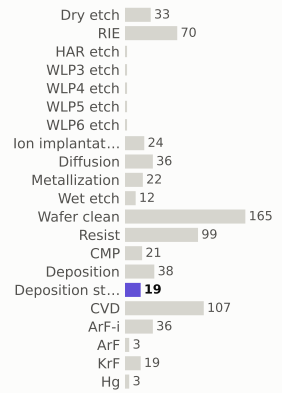

materials deposited (g)

gases emitted (g)

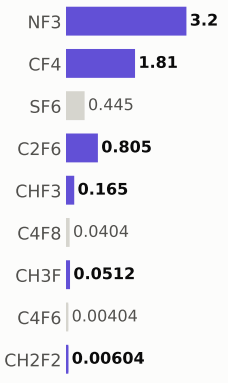

Step #14920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	479.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

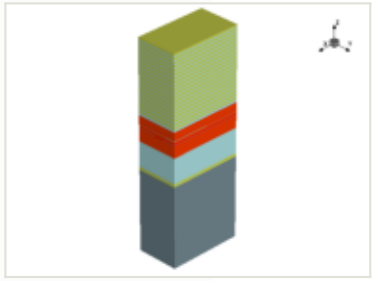

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

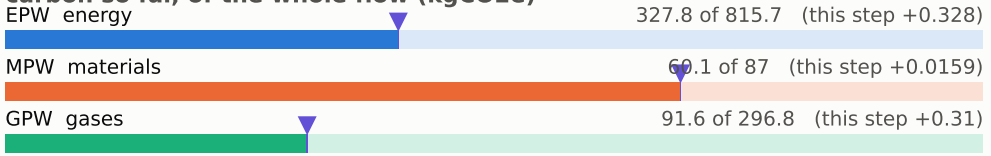

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

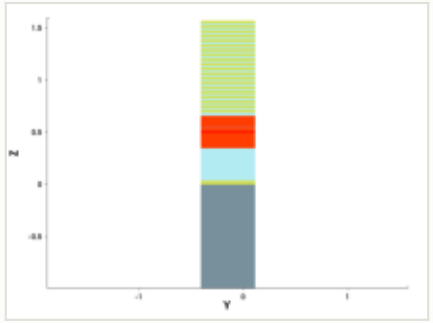

y cut at -0.150 µm

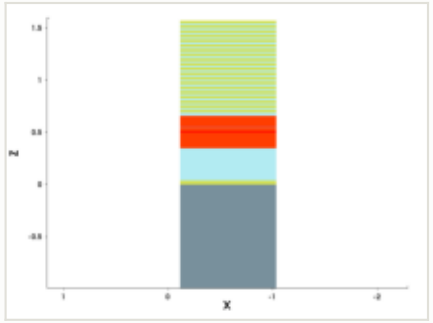

mask for this step

no mask for this step

steps by process area

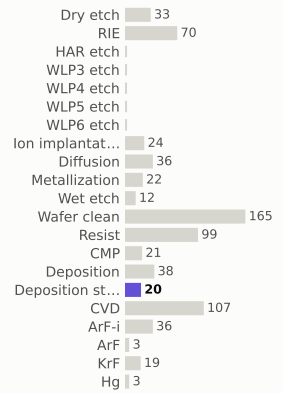

materials deposited (g)

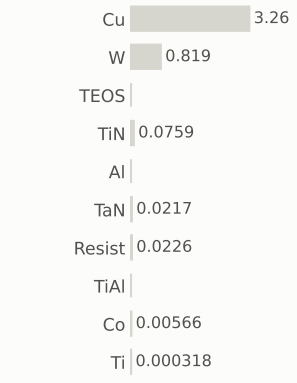

gases emitted (g)

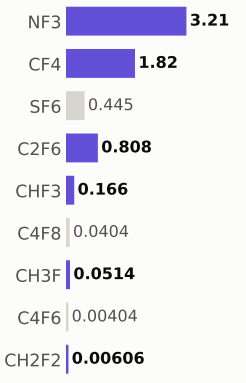

Step #14930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	480.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

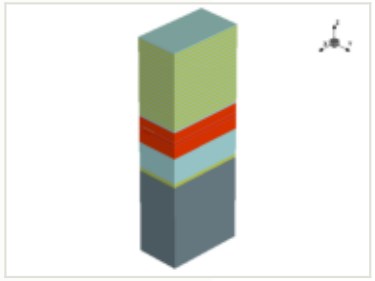

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

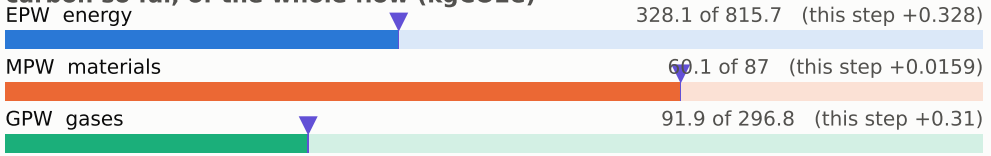

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

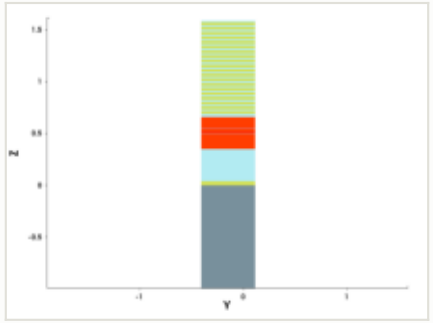

y cut at -0.150 µm

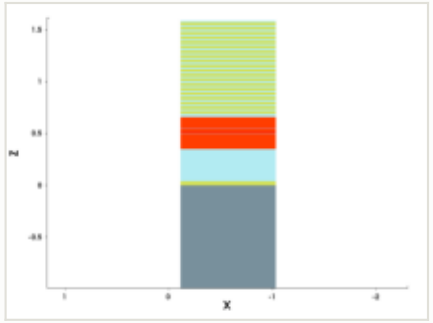

mask for this step

no mask for this step

steps by process area

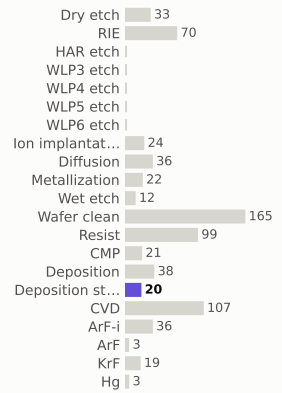

materials deposited (g)

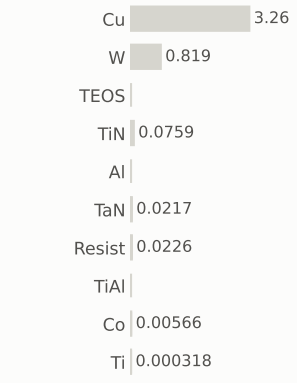

gases emitted (g)

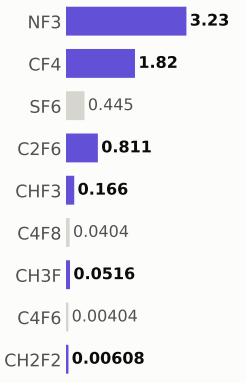

Step #14940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	480.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

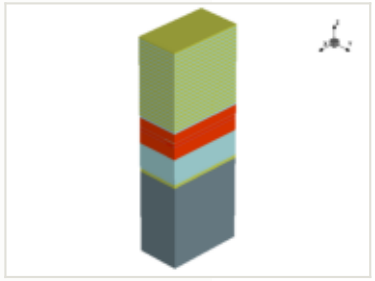

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

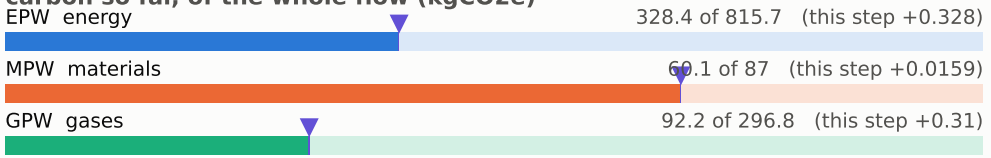

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

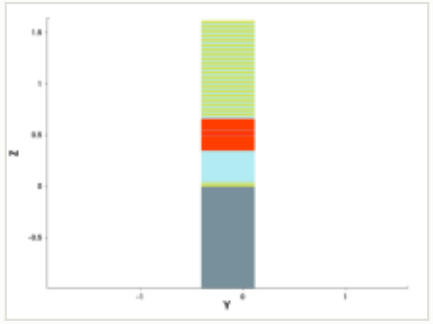

y cut at -0.150 µm

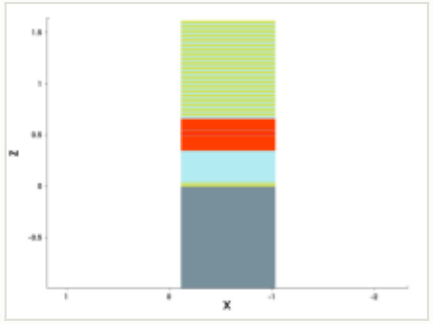

mask for this step

no mask for this step

steps by process area

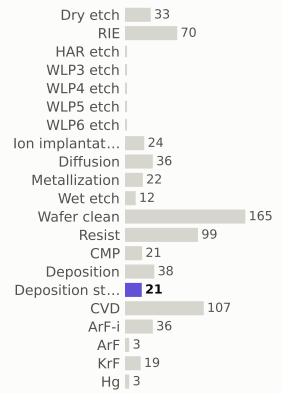

materials deposited (g)

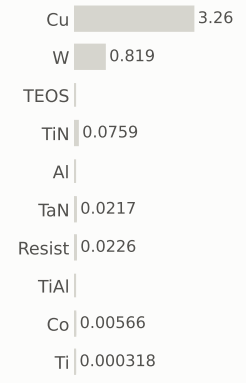

gases emitted (g)

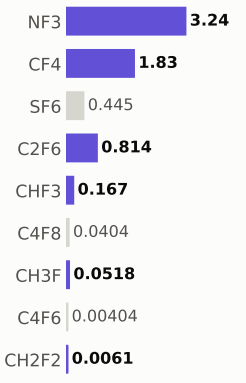

Step #14950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	481.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

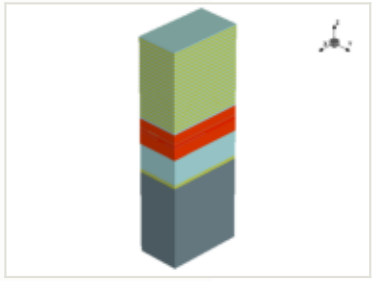

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

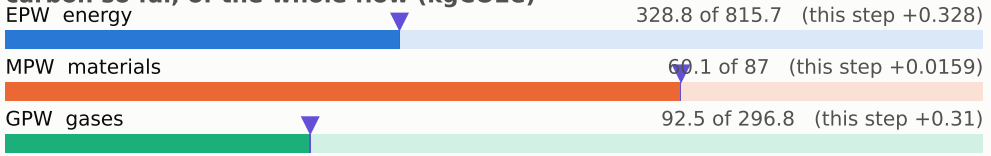

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

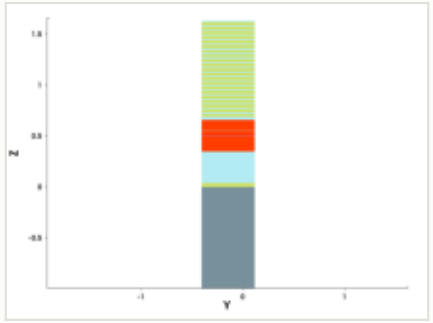

y cut at -0.150 µm

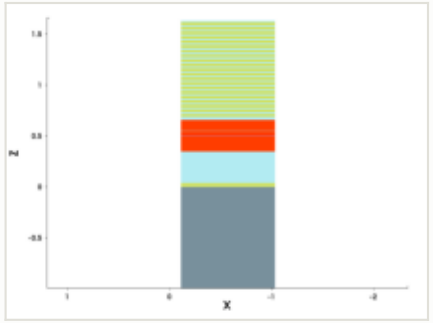

mask for this step

no mask for this step

steps by process area

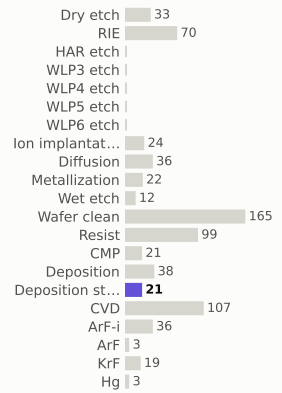

materials deposited (g)

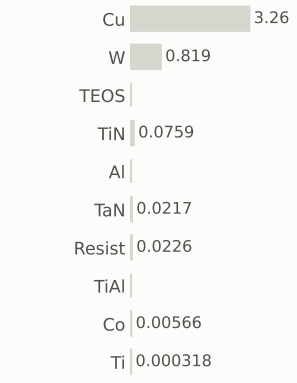

gases emitted (g)

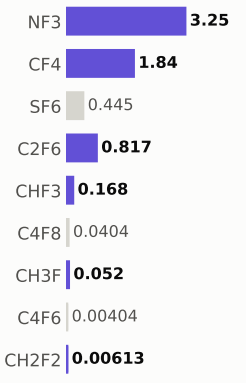

Step #14960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	482.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

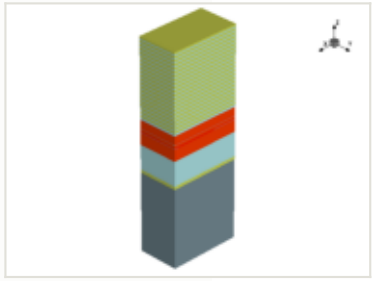

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

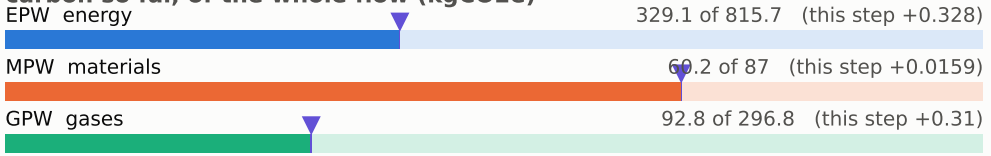

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

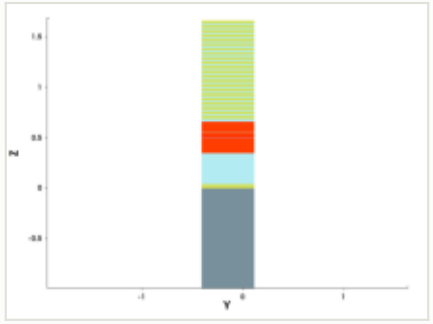

y cut at -0.150 µm

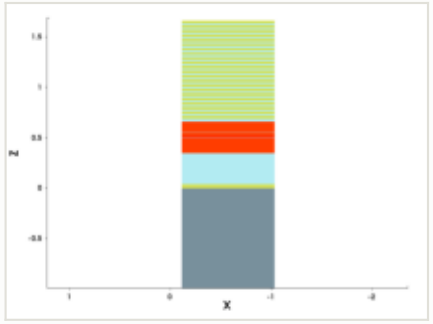

mask for this step

no mask for this step

steps by process area

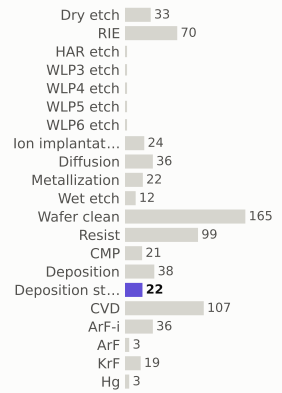

materials deposited (g)

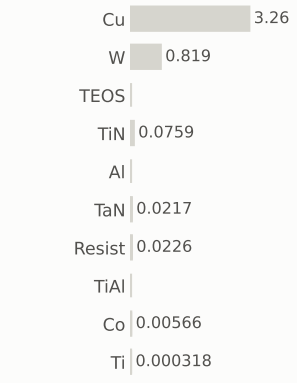

gases emitted (g)

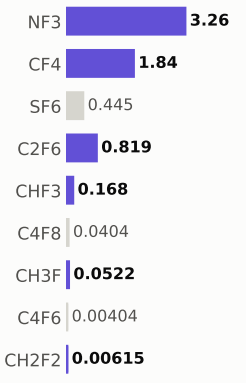

Step #14970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	482.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

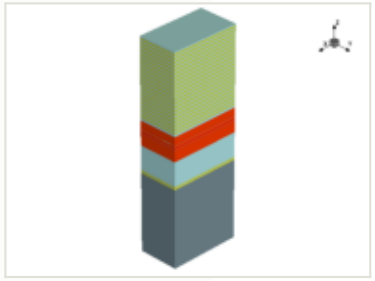

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

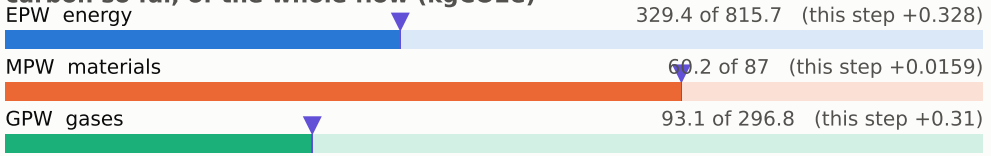

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

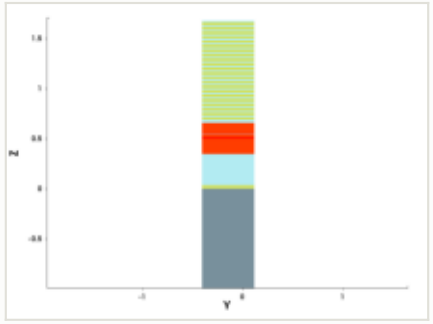

y cut at -0.150 µm

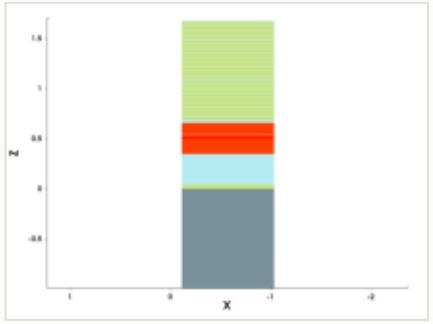

mask for this step

no mask for this step

steps by process area

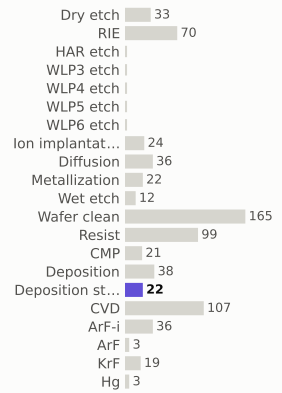

materials deposited (g)

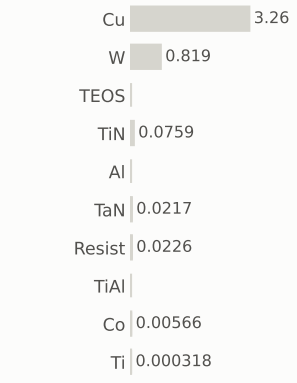

gases emitted (g)

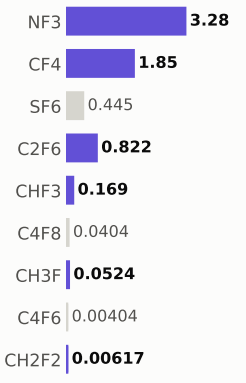

Step #14980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	483.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

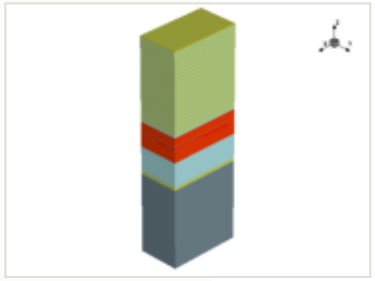

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

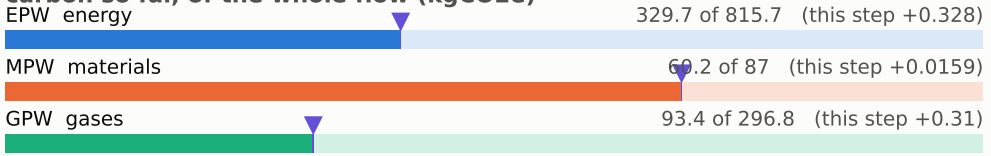

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

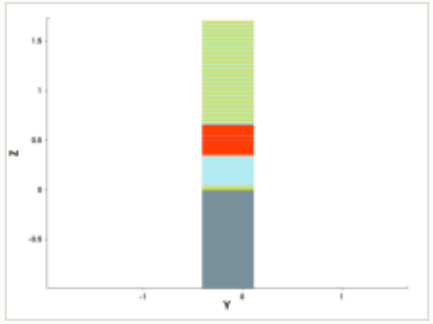

y cut at -0.150 µm

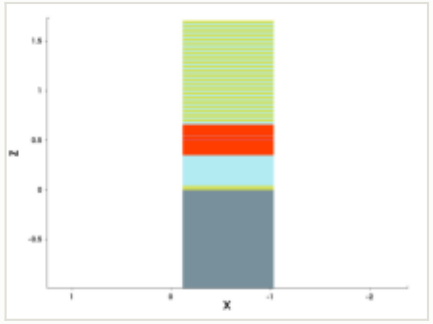

mask for this step

no mask for this step

steps by process area

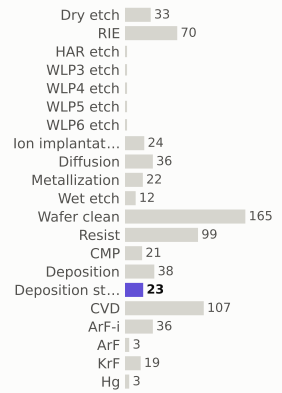

materials deposited (g)

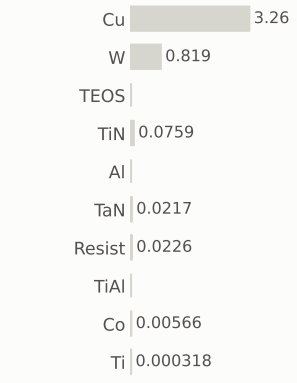

gases emitted (g)

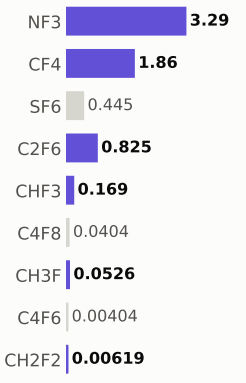

Step #14990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	484.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

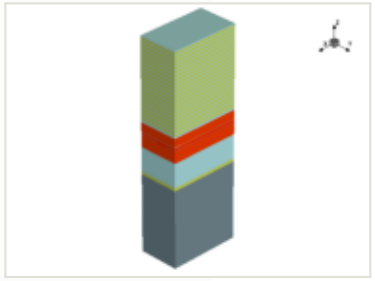

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

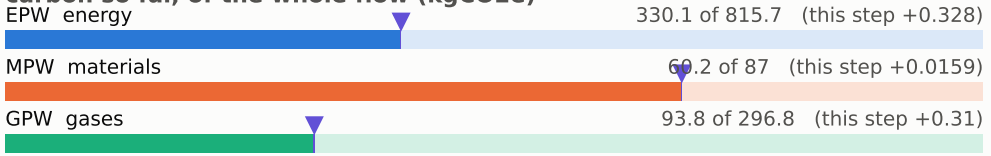

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

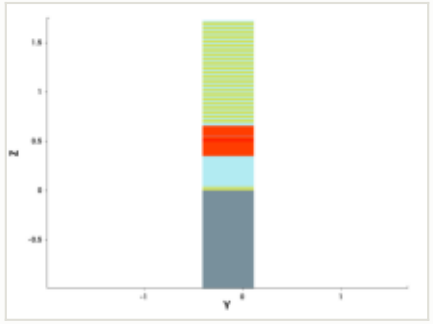

y cut at -0.150 µm

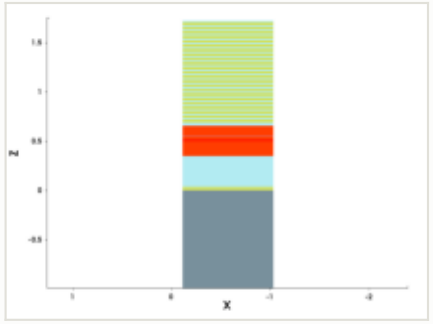

mask for this step

no mask for this step

steps by process area

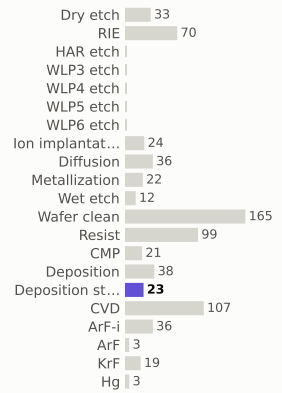

materials deposited (g)

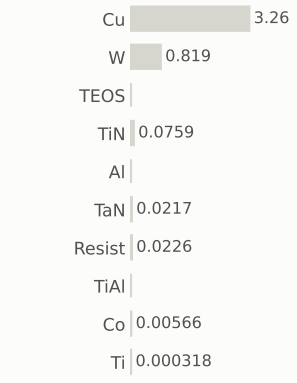

gases emitted (g)

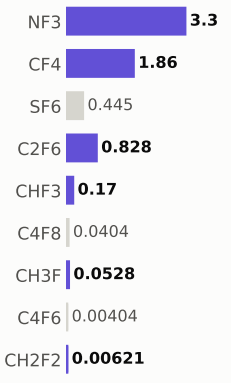

Step #15000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	484.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

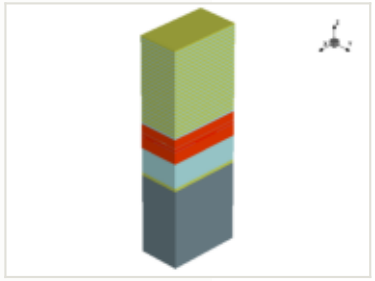

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

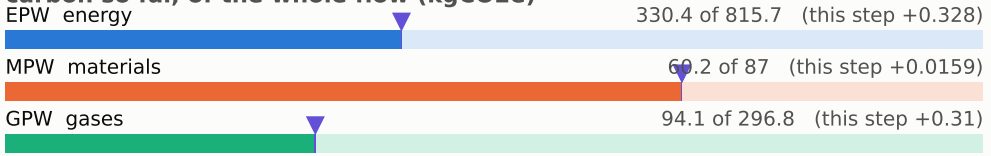

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

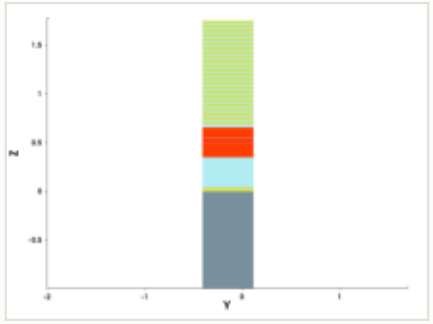

y cut at -0.150 µm

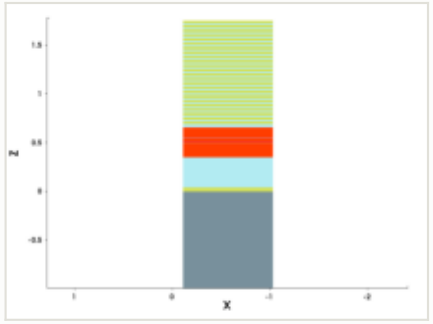

mask for this step

no mask for this step

steps by process area

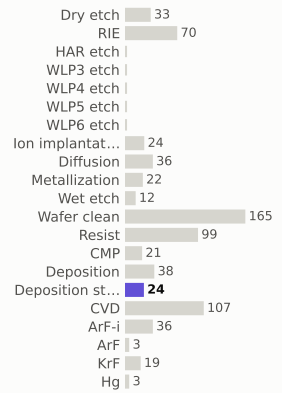

materials deposited (g)

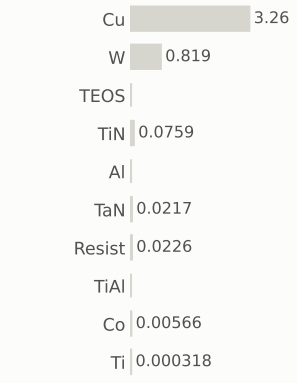

gases emitted (g)

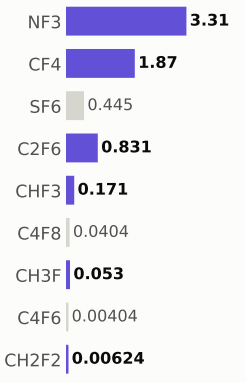

Step #15010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	485.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

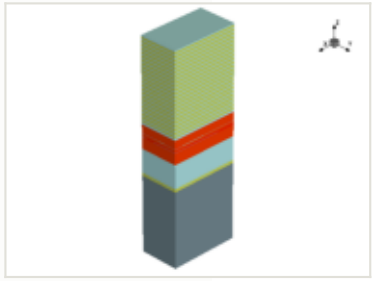

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

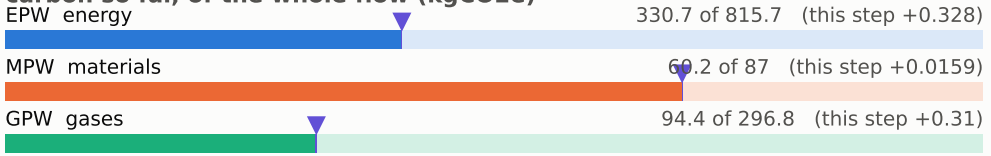

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

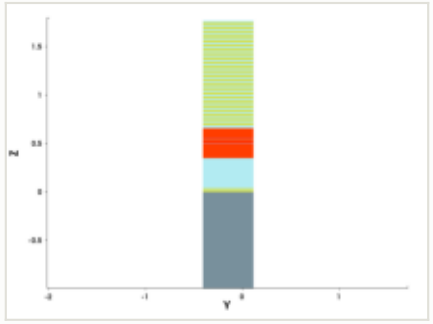

y cut at -0.150 µm

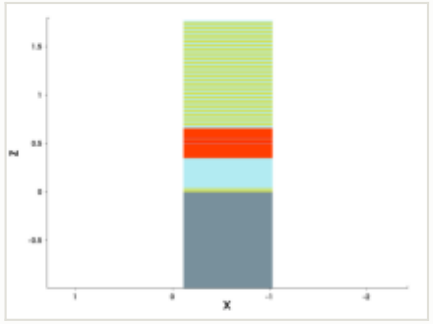

mask for this step

no mask for this step

steps by process area

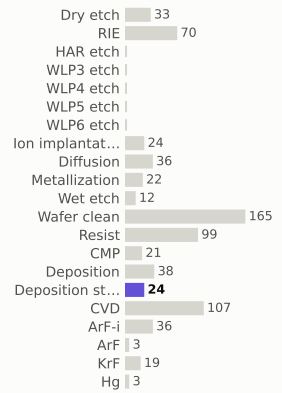

materials deposited (g)

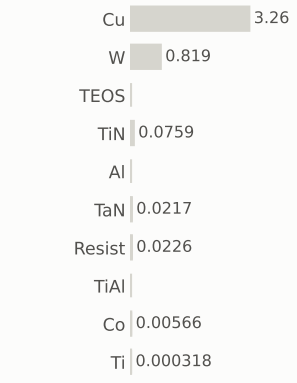

gases emitted (g)

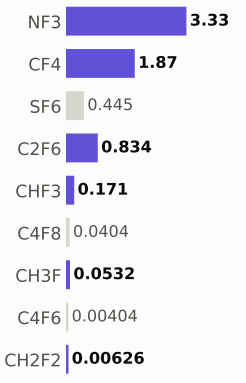

Step #15020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	486.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

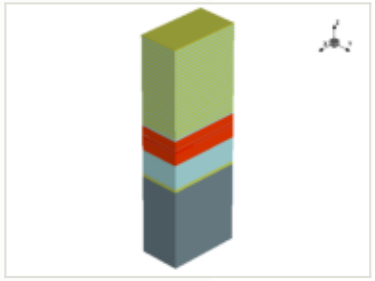

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

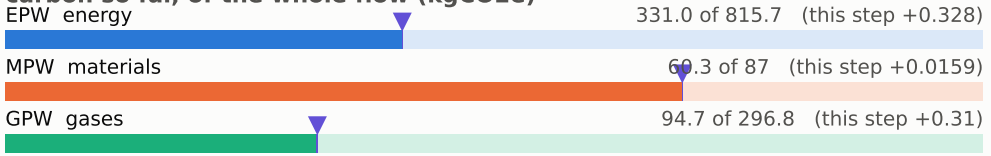

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

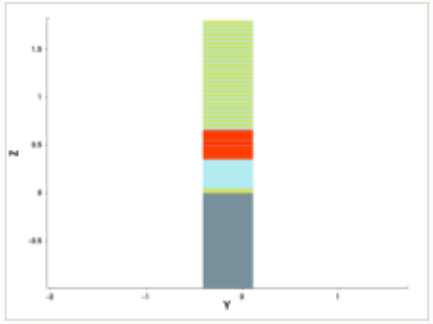

y cut at -0.150 µm

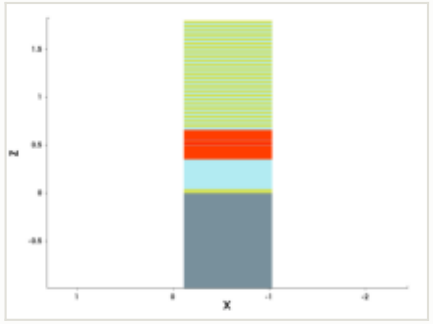

mask for this step

no mask for this step

steps by process area

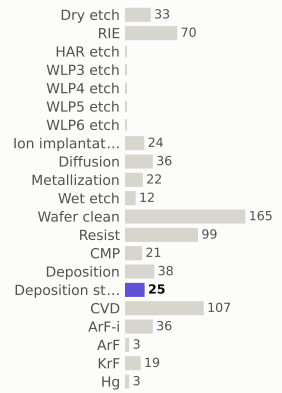

materials deposited (g)

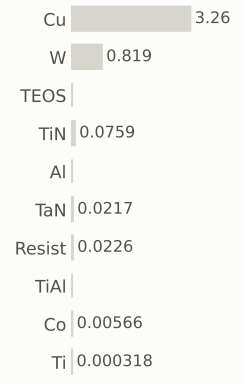

gases emitted (g)

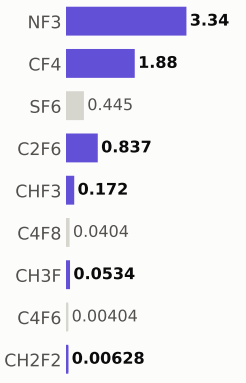

Step #15030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	486.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

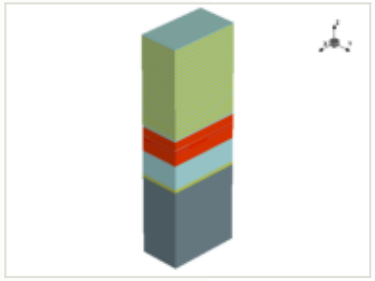

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

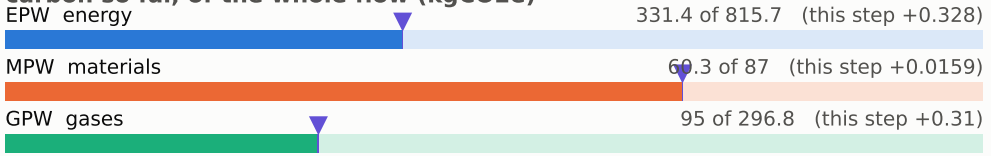

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

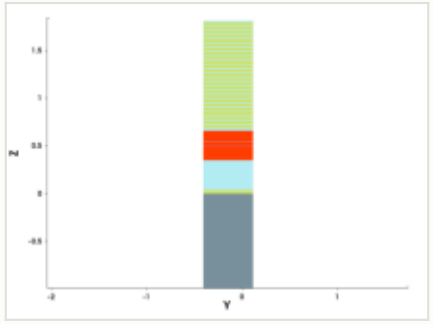

y cut at -0.150 µm

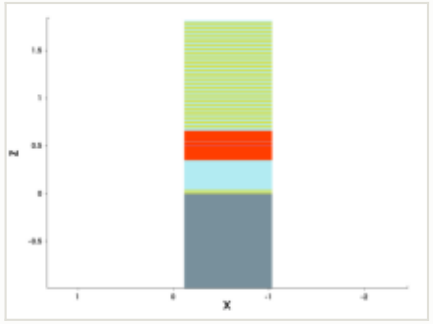

mask for this step

no mask for this step

steps by process area

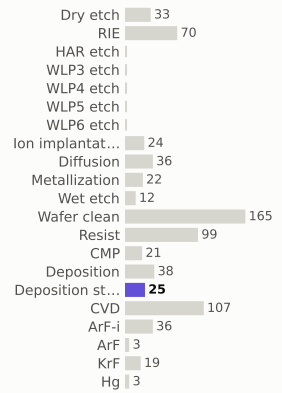

materials deposited (g)

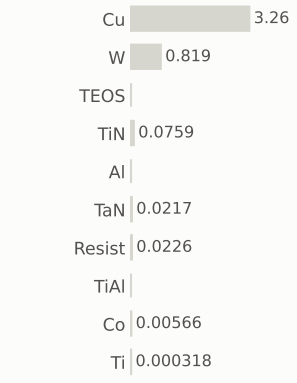

gases emitted (g)

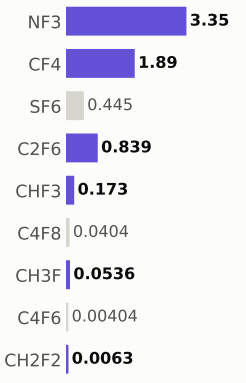

Step #15040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	487.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

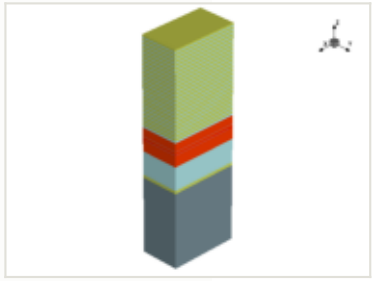

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

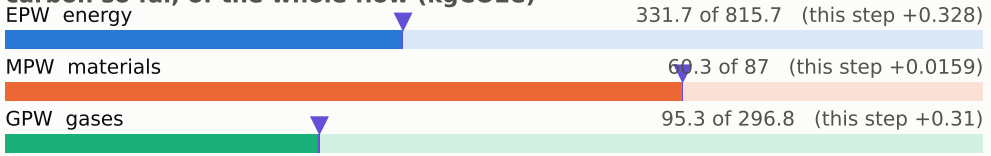

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

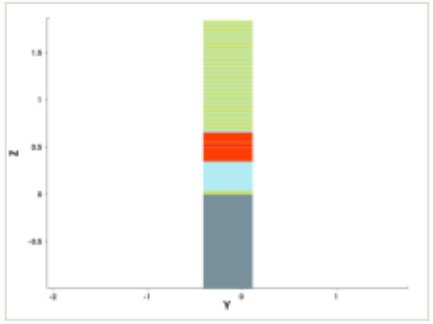

y cut at -0.150 µm

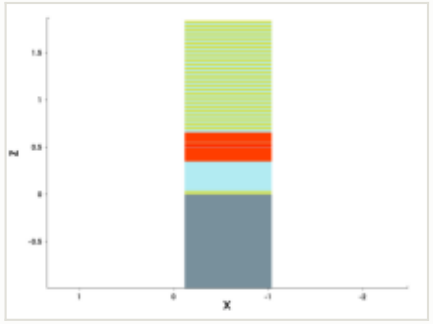

mask for this step

no mask for this step

steps by process area

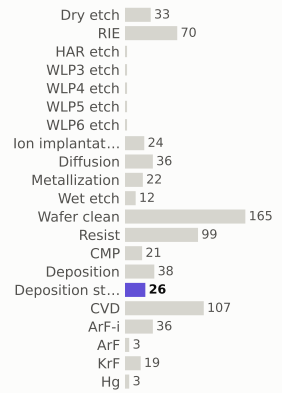

materials deposited (g)

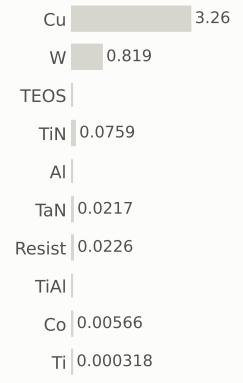

gases emitted (g)

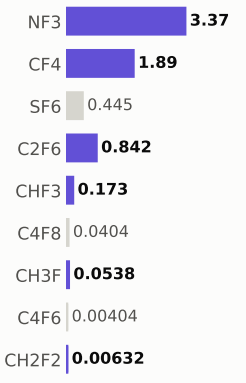

Step #15050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	488.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

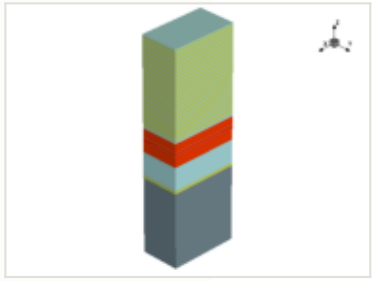

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

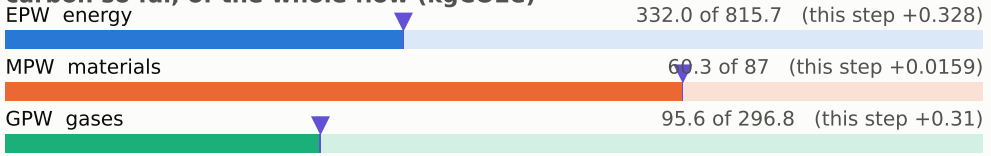

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

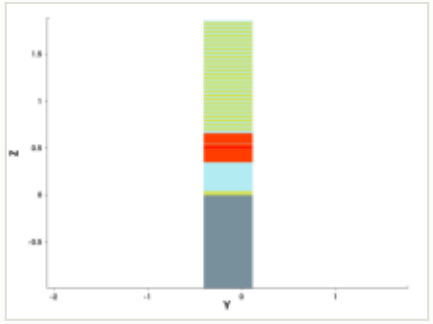

y cut at -0.150 µm

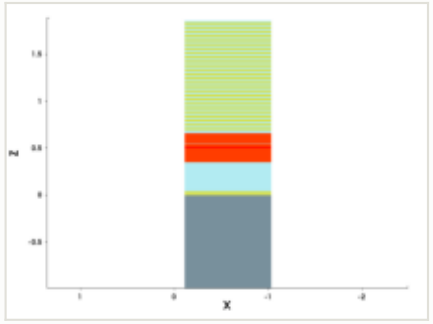

mask for this step

no mask for this step

steps by process area

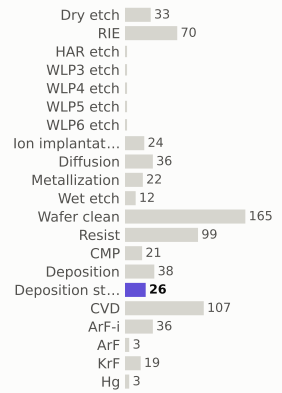

materials deposited (g)

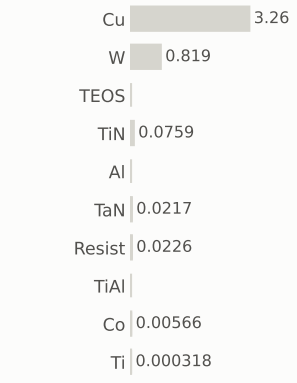

gases emitted (g)

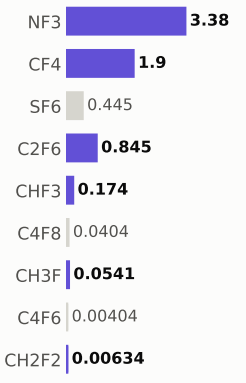

Step #15060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	488.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

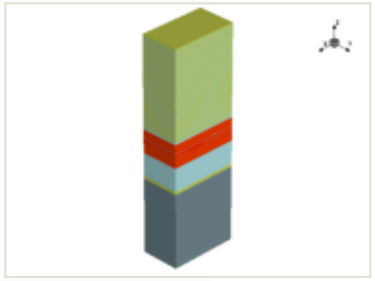

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

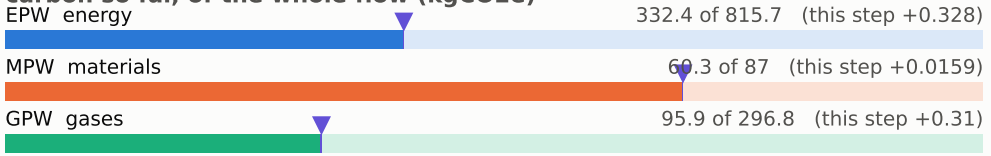

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

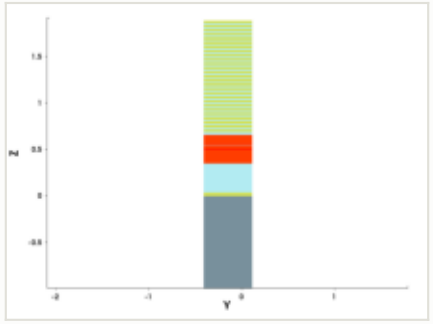

y cut at -0.150 µm

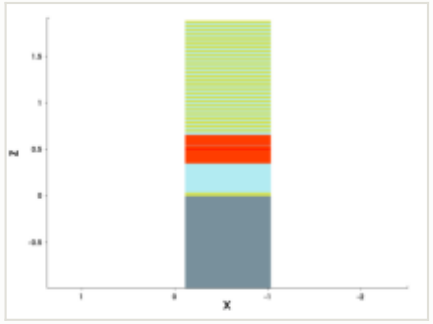

mask for this step

no mask for this step

steps by process area

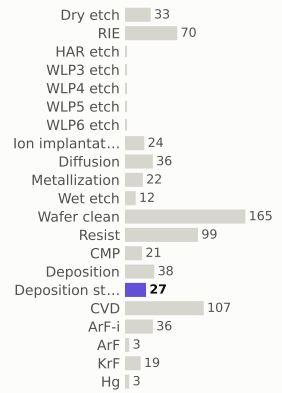

materials deposited (g)

gases emitted (g)

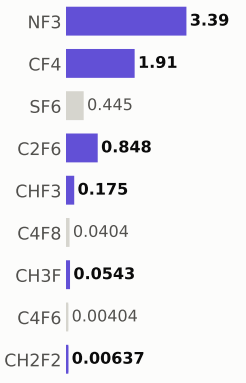

Step #15070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	489.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

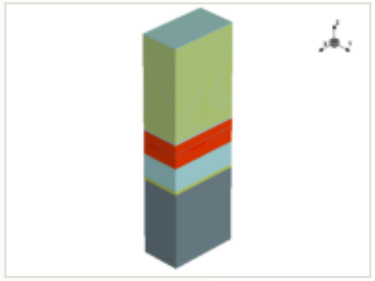

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

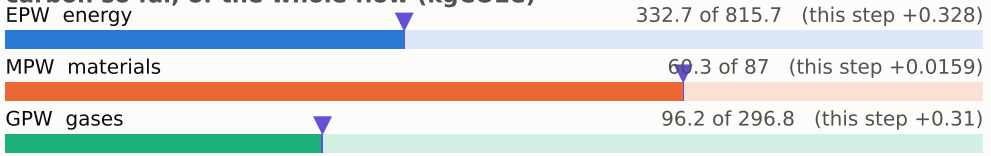

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

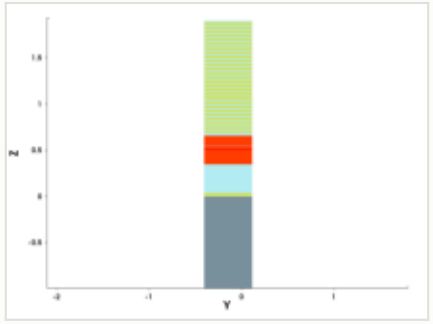

y cut at -0.150 µm

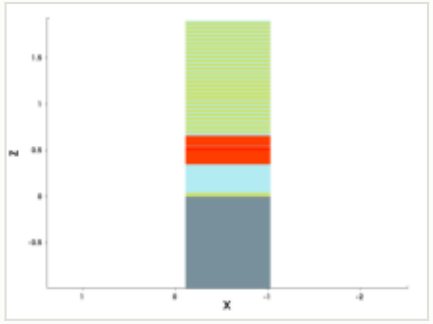

mask for this step

no mask for this step

steps by process area

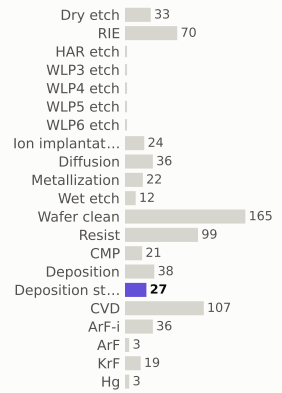

materials deposited (g)

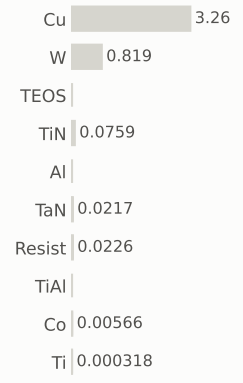

gases emitted (g)

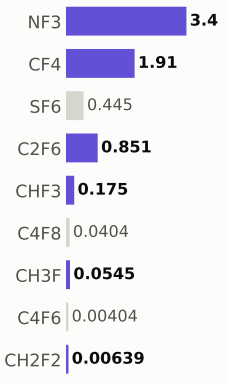

Step #15080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	489.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

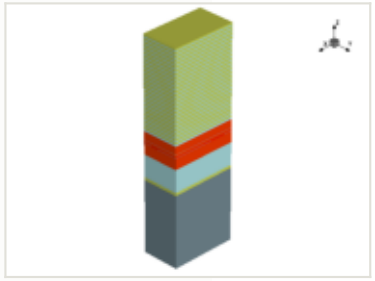



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

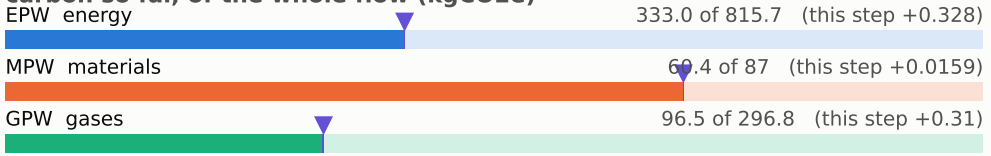

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

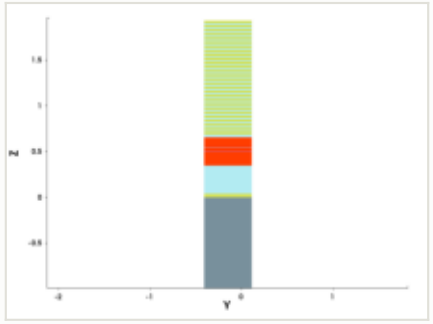

y cut at -0.150 µm

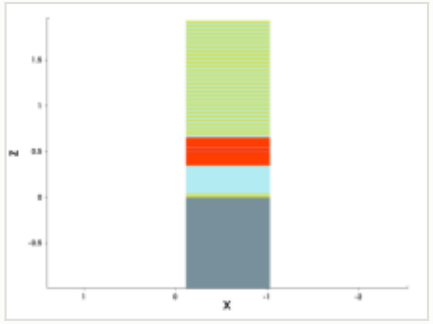

mask for this step

no mask for this step

steps by process area

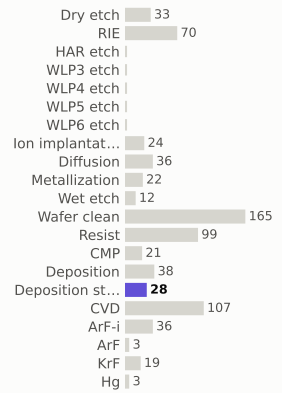

materials deposited (g)

gases emitted (g)

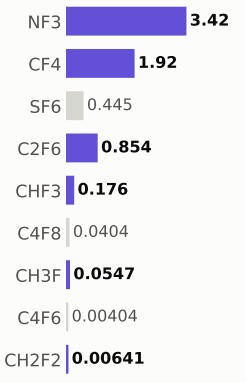

Step #15090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	490.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

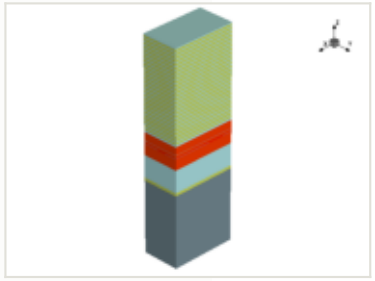

x cut at -0.570 µm

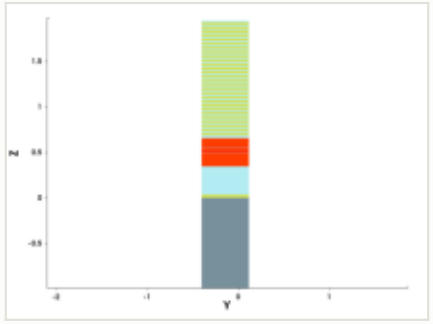

y cut at -0.150 µm

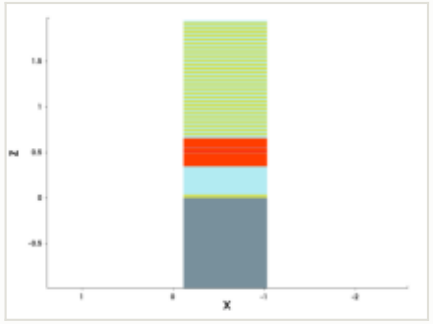

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

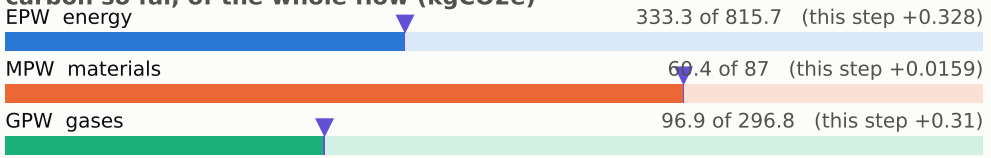

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

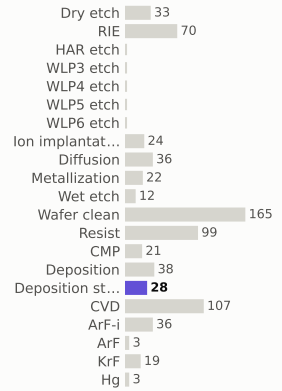

materials deposited (g)

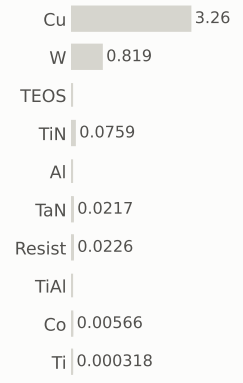

gases emitted (g)

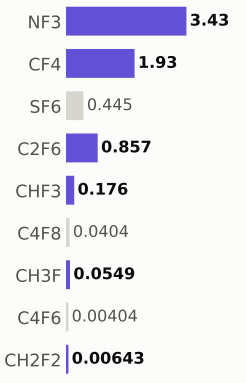

Step #15100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	491.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

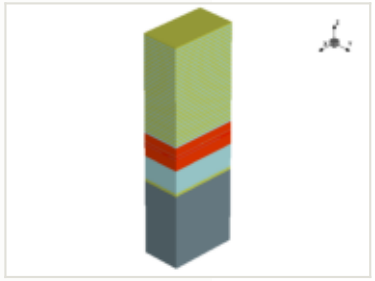



x cut at -0.570 µm

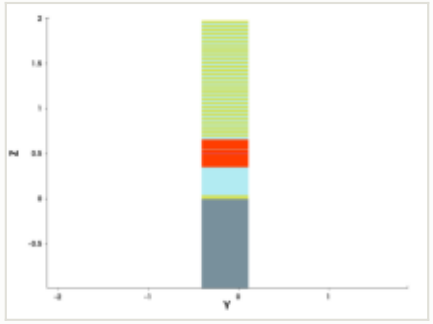

y cut at -0.150 µm

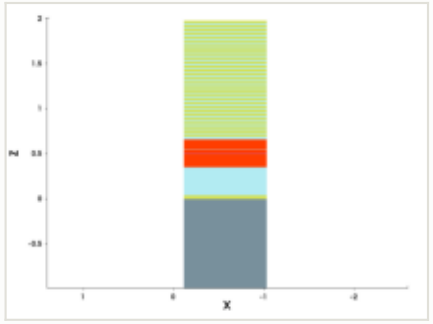

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

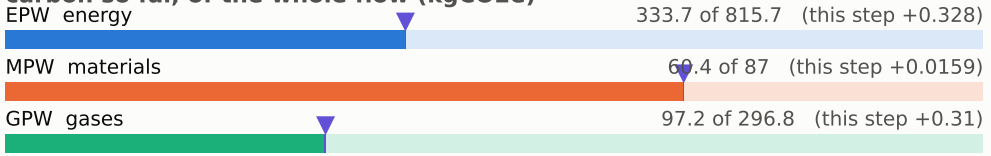

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

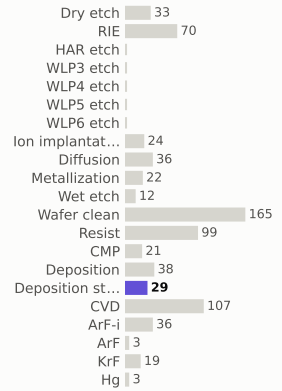

materials deposited (g)

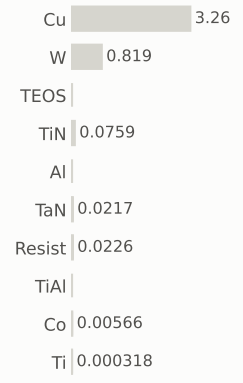

gases emitted (g)

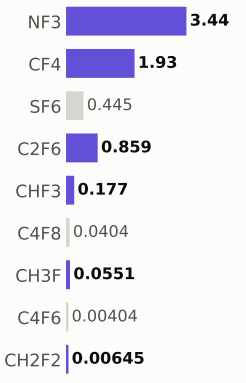

Step #15110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	491.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

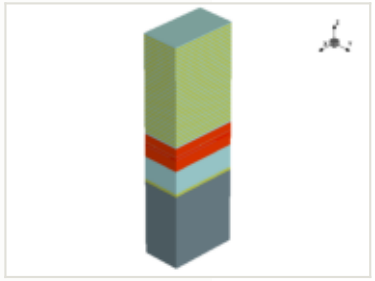



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

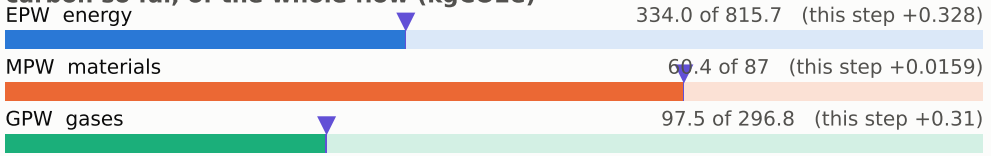

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

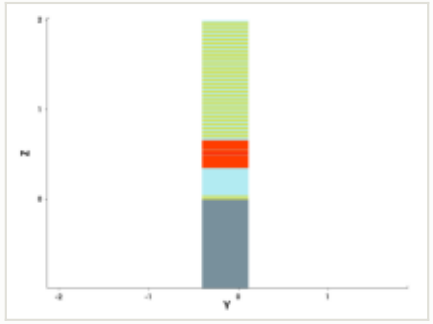

y cut at -0.150 µm

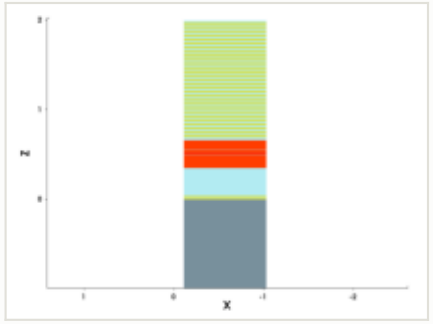

mask for this step

no mask for this step

steps by process area

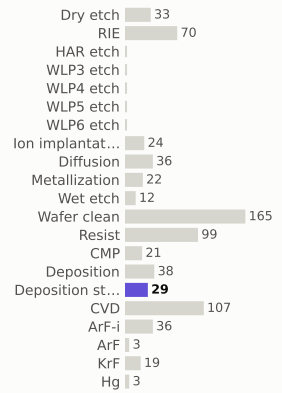

materials deposited (g)

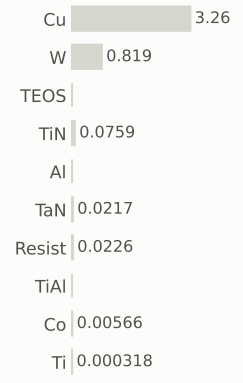

gases emitted (g)

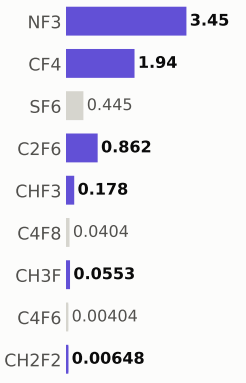

Step #15120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	492.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

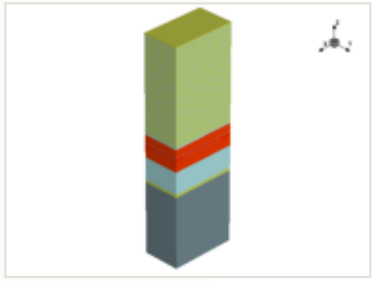



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

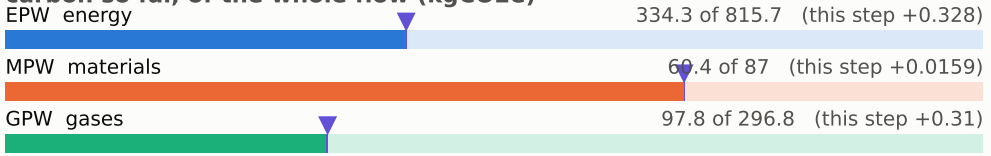

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

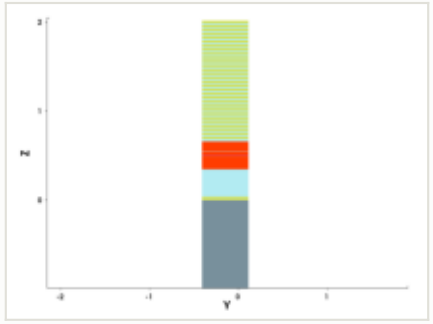

y cut at -0.150 µm

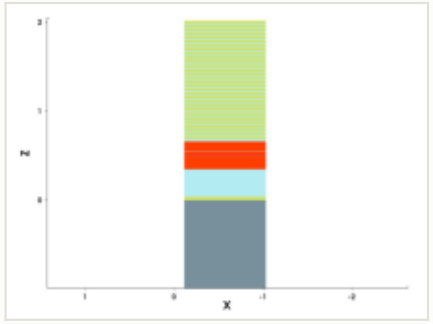

mask for this step

no mask for this step

steps by process area

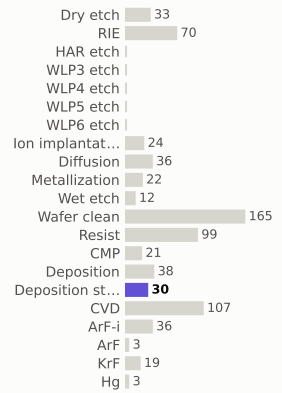

materials deposited (g)

gases emitted (g)

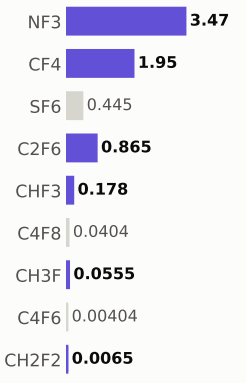

Step #15130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	493.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

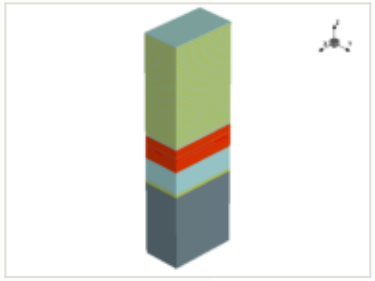

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

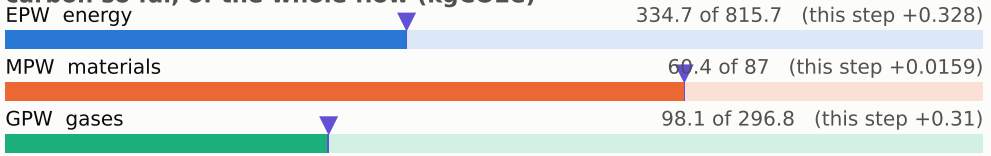

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

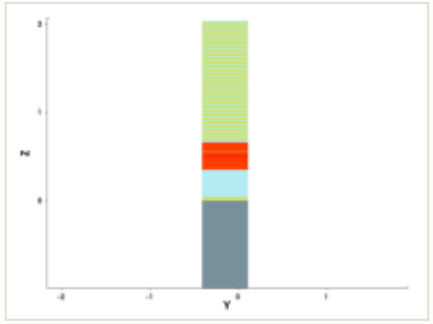

y cut at -0.150 µm

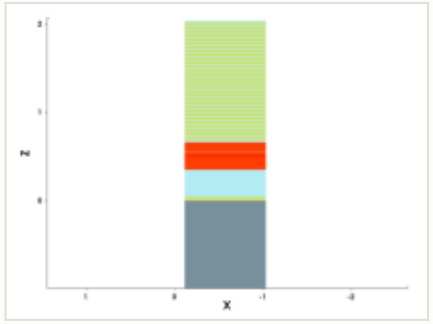

mask for this step

no mask for this step

steps by process area

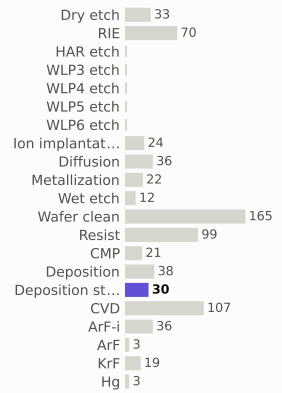

materials deposited (g)

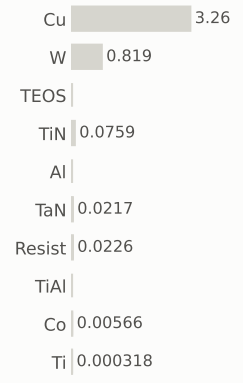

gases emitted (g)

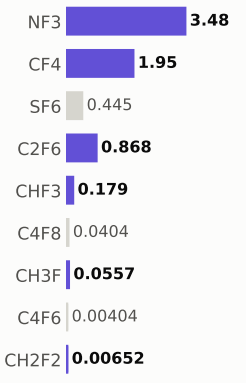

Step #15140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	493.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

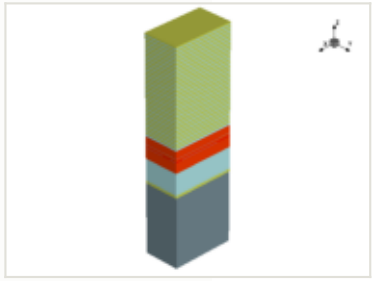



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

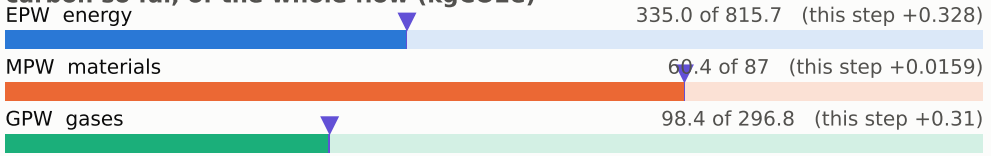

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

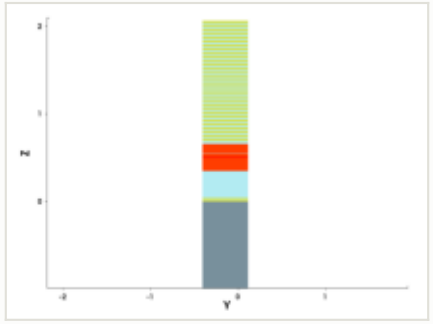

y cut at -0.150 µm

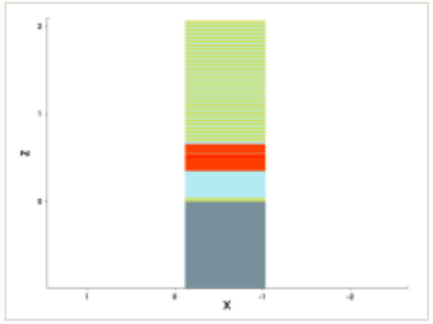

mask for this step

no mask for this step

steps by process area

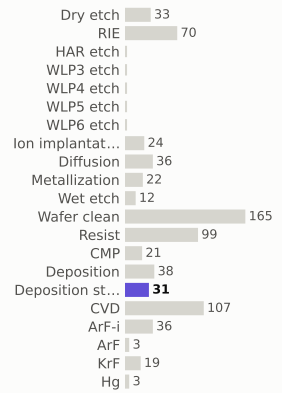

materials deposited (g)

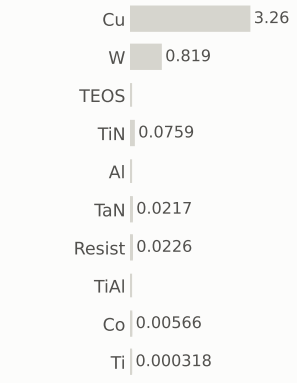

gases emitted (g)

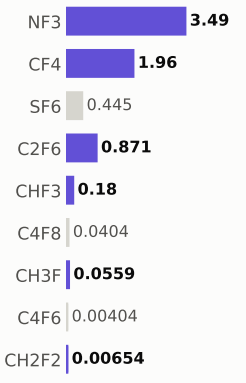

Step #15150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	494.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

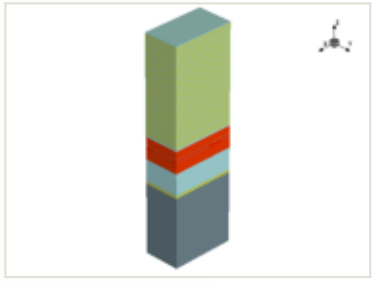

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

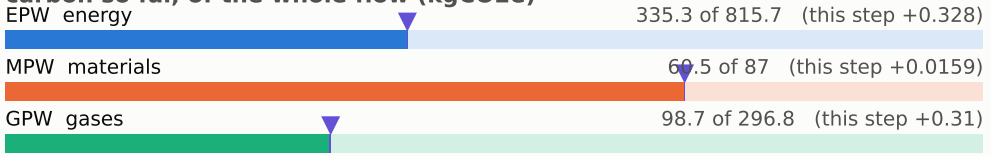

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

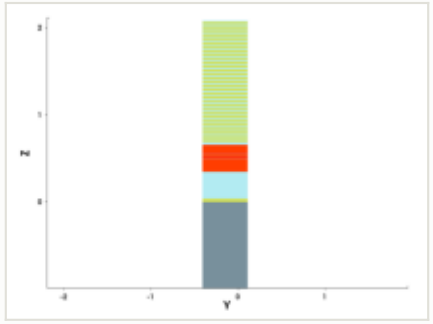

y cut at -0.150 µm

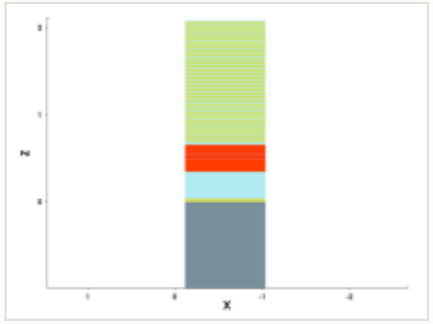

mask for this step

no mask for this step

steps by process area

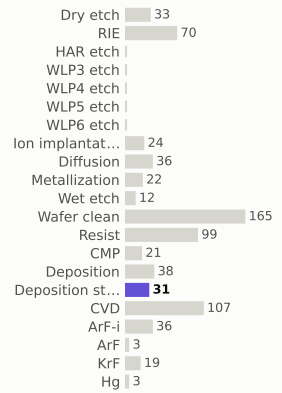

materials deposited (g)

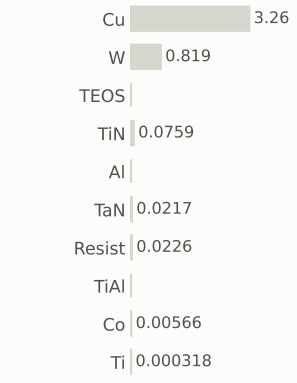

gases emitted (g)

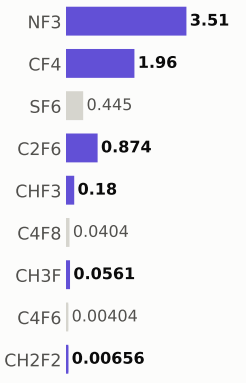

Step #15160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	495.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

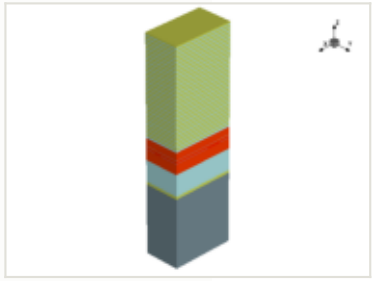



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

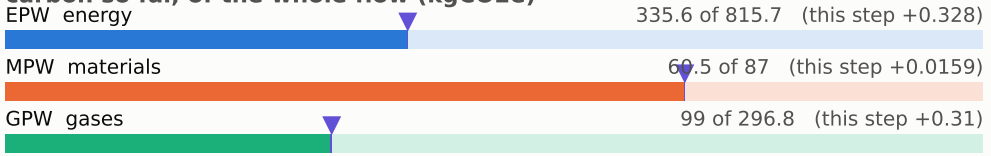

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

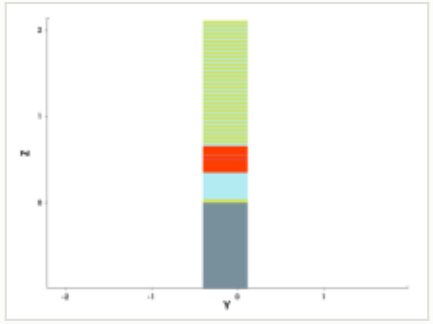

y cut at -0.150 µm

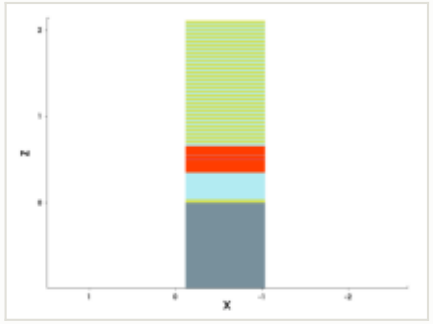

mask for this step

no mask for this step

steps by process area

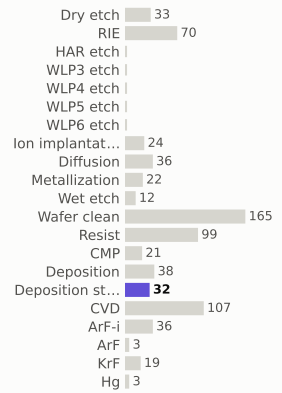

materials deposited (g)

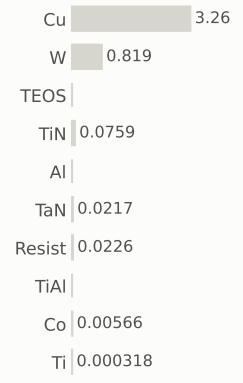

gases emitted (g)

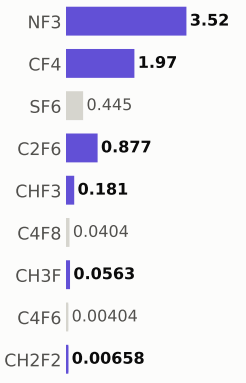

Step #15170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	495.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

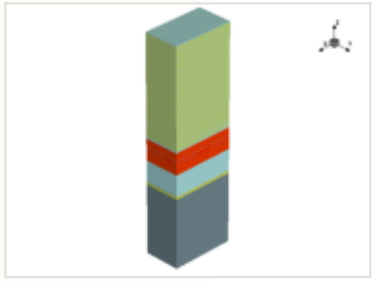



this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

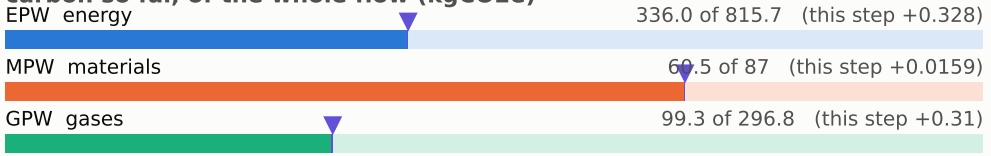

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

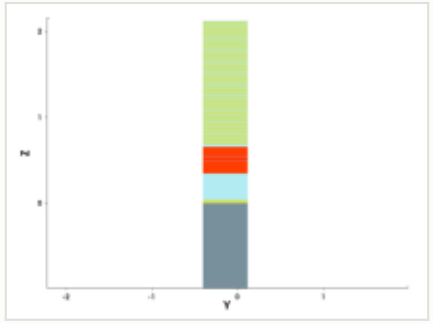

y cut at -0.150 µm

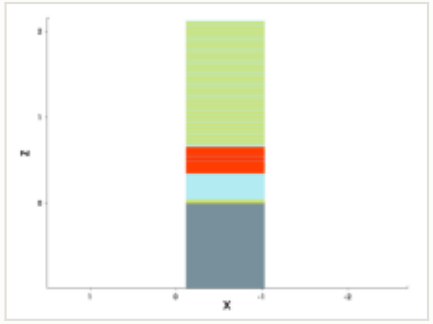

mask for this step

no mask for this step

steps by process area

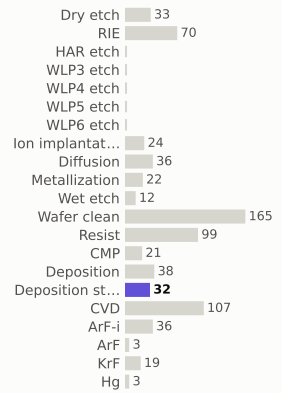

materials deposited (g)

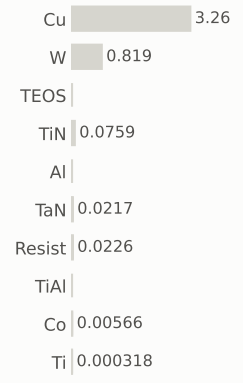

gases emitted (g)

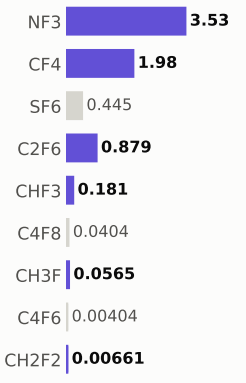

Step #15180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	496.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

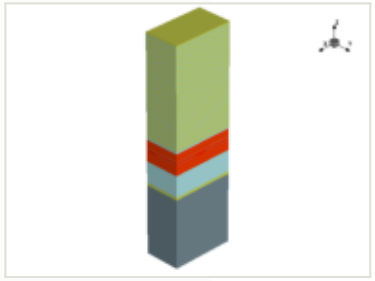



this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

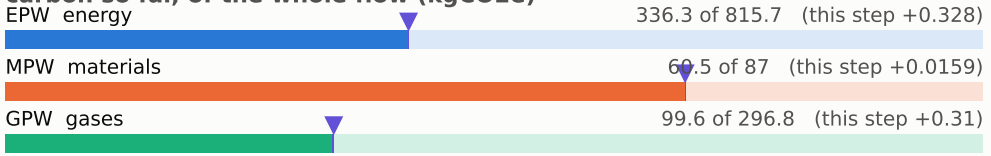

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

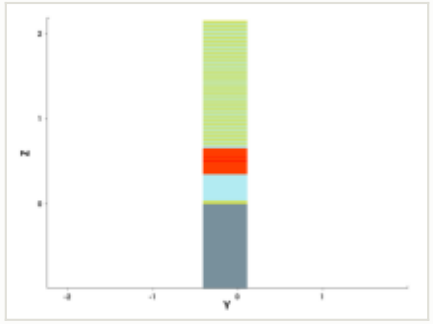

y cut at -0.150 µm

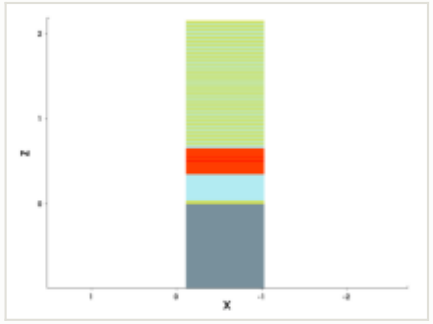

mask for this step

no mask for this step

steps by process area

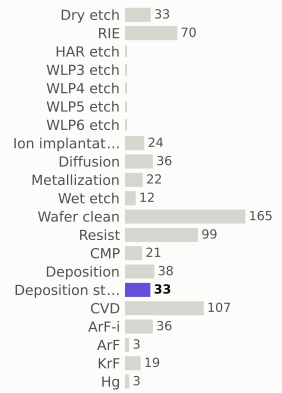

materials deposited (g)

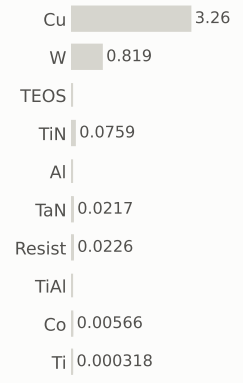

gases emitted (g)

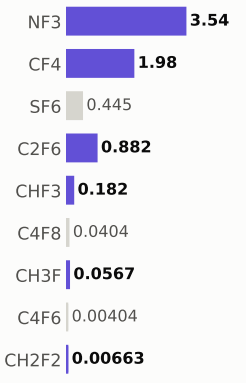

Step #15190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	497.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

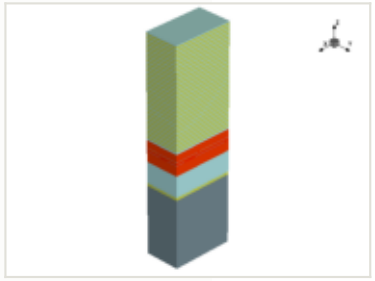

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

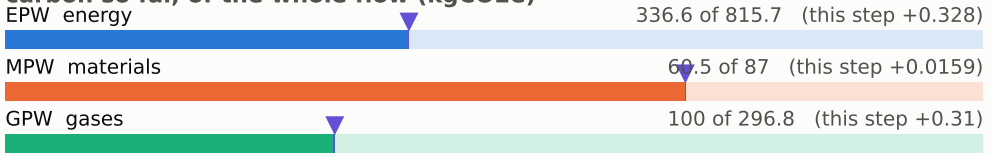

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

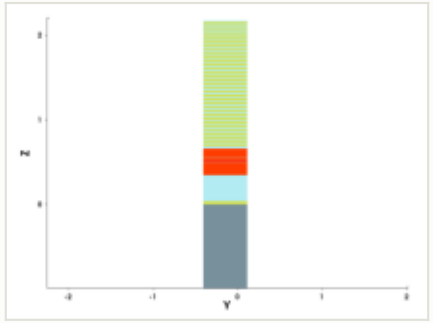

y cut at -0.150 µm

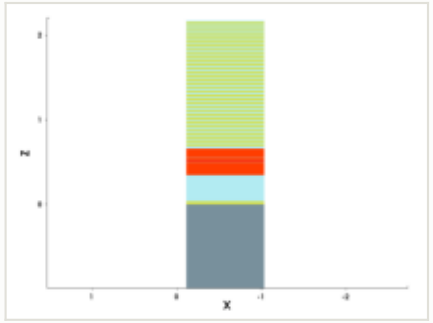

mask for this step

no mask for this step

steps by process area

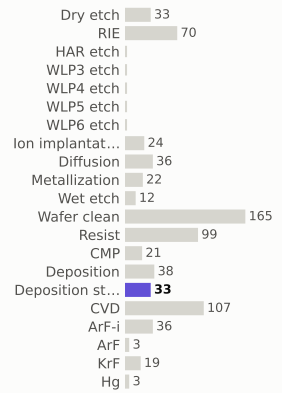

materials deposited (g)

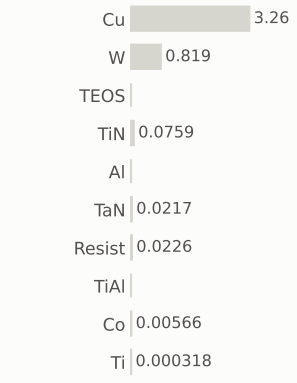

gases emitted (g)

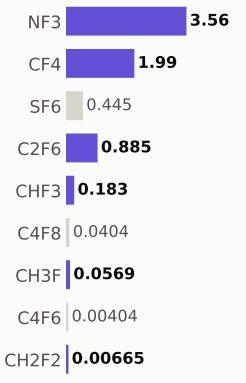

Step #15200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	497.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

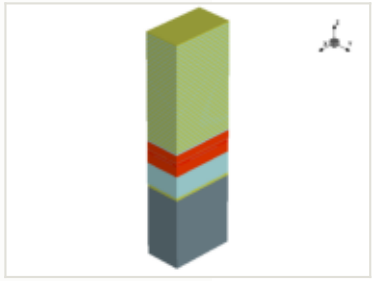

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

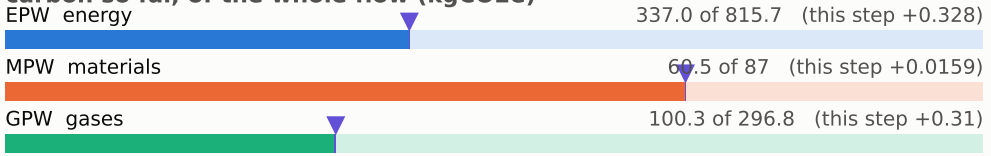

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

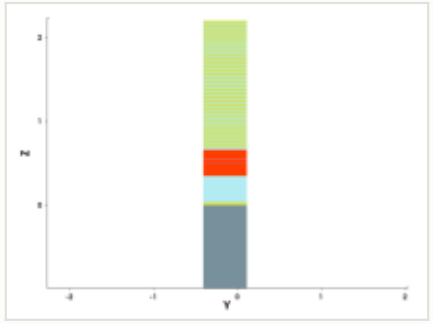

y cut at -0.150 µm

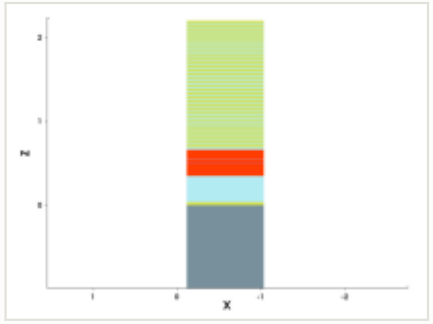

mask for this step

no mask for this step

steps by process area

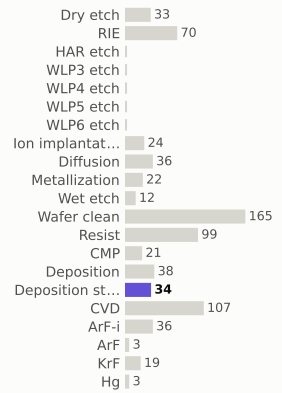

materials deposited (g)

gases emitted (g)

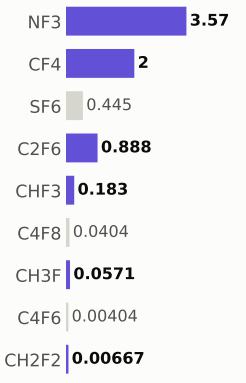

Step #15210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	498.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

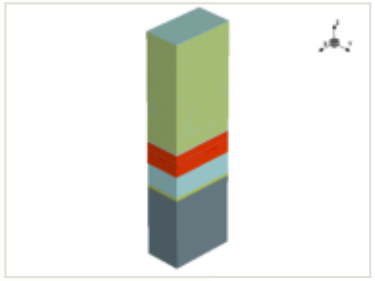

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

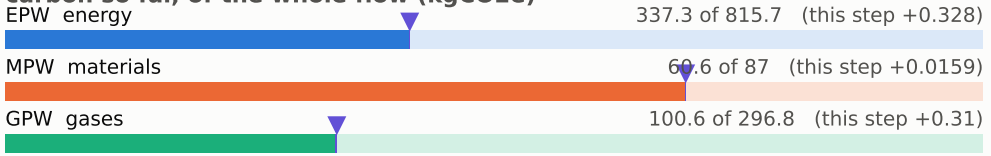

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

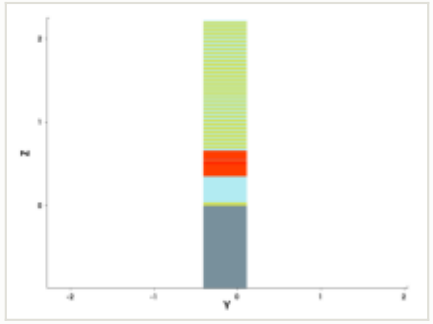

y cut at -0.150 µm

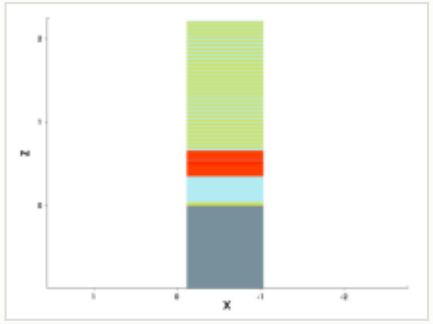

mask for this step

no mask for this step

steps by process area

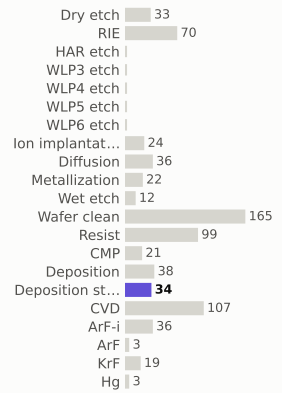

materials deposited (g)

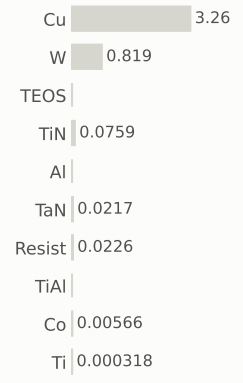

gases emitted (g)

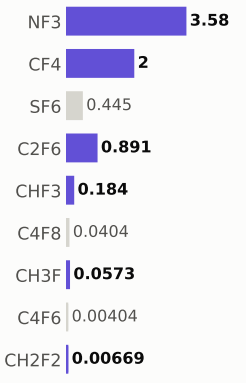

Step #15220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	499.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

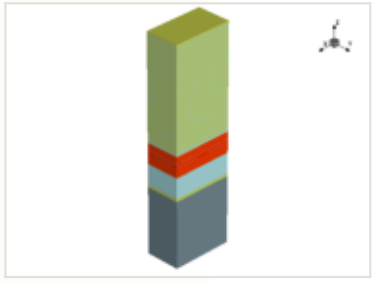

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

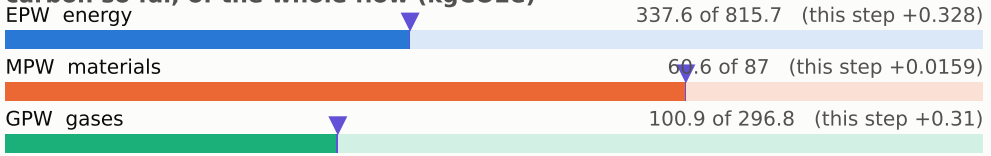

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

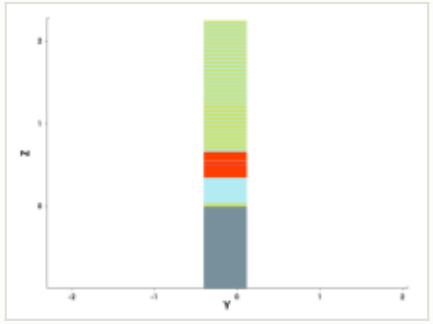

y cut at -0.150 µm

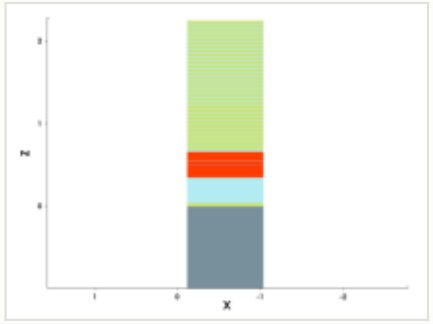

mask for this step

no mask for this step

steps by process area

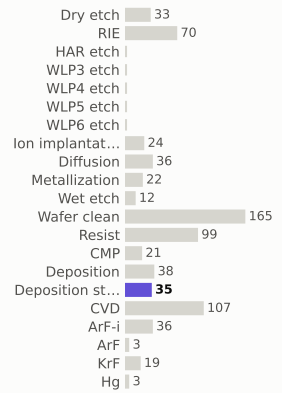

materials deposited (g)

gases emitted (g)

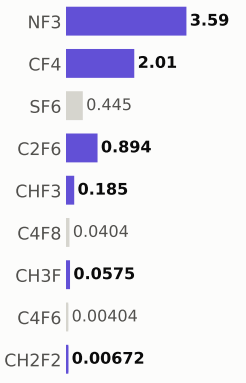

Step #15230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	499.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

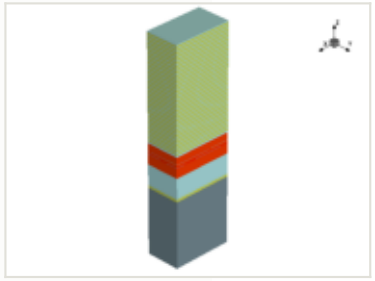

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

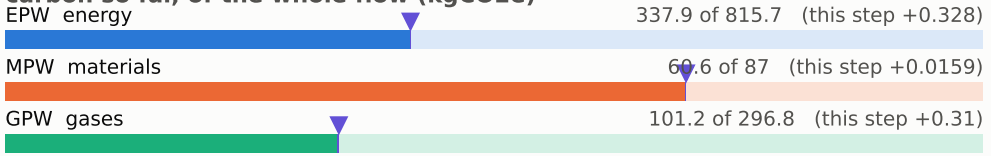

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

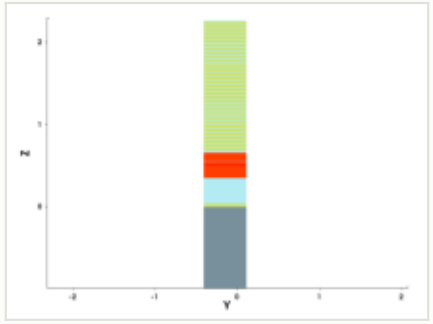

y cut at -0.150 µm

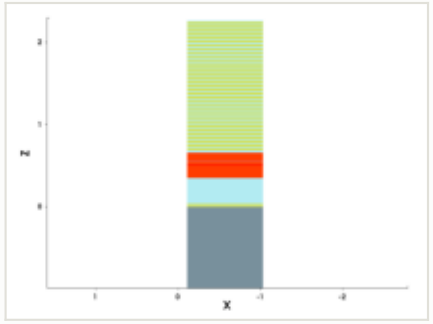

mask for this step

no mask for this step

steps by process area

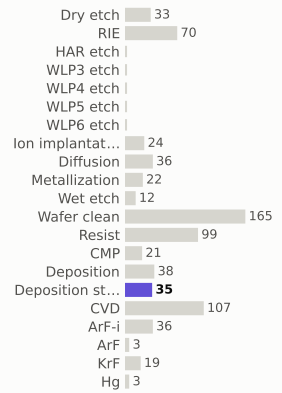

materials deposited (g)

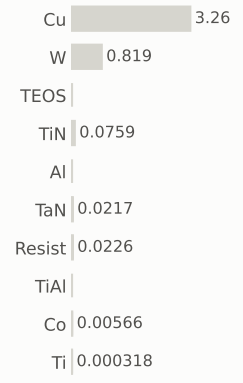

gases emitted (g)

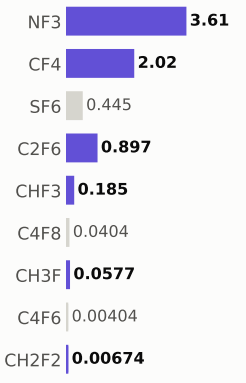

Step #15240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	500.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

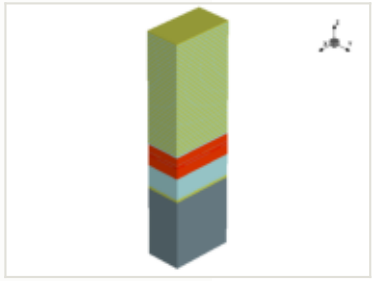

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

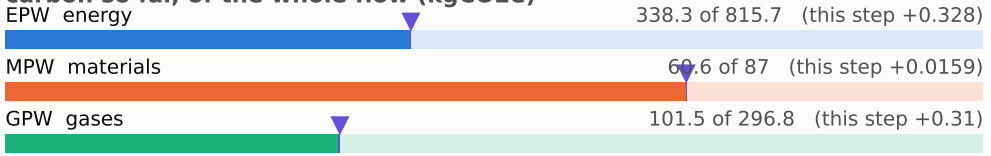

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

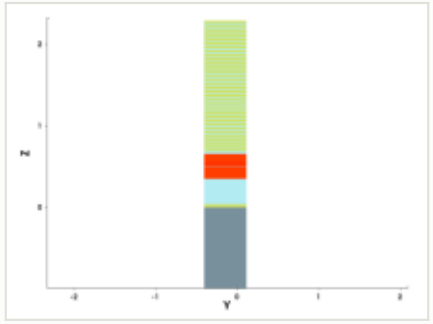

y cut at -0.150 µm

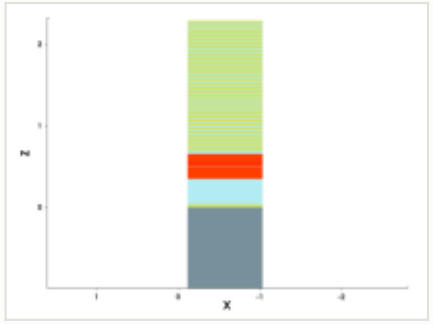

mask for this step

no mask for this step

steps by process area

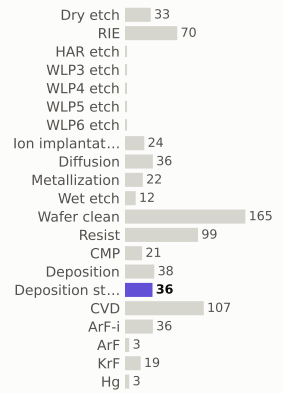

materials deposited (g)

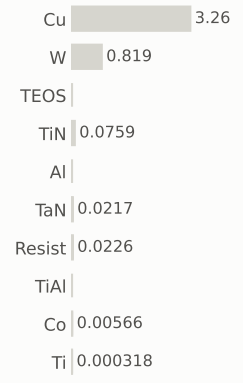

gases emitted (g)

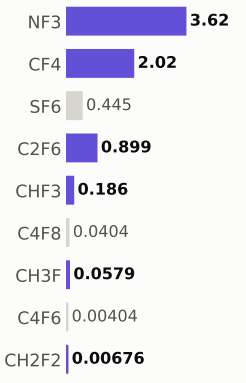

Step #15250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	501.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

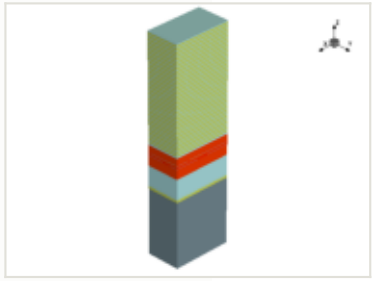

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

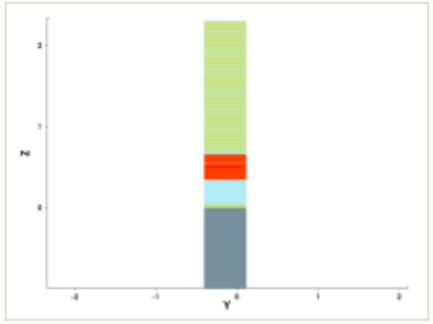

y cut at -0.150 µm

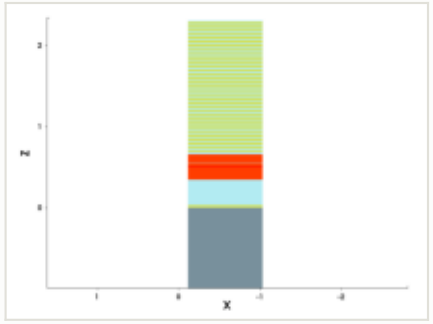

mask for this step

no mask for this step

steps by process area

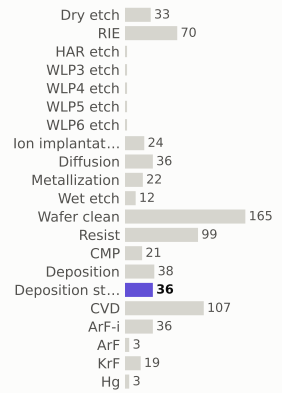

materials deposited (g)

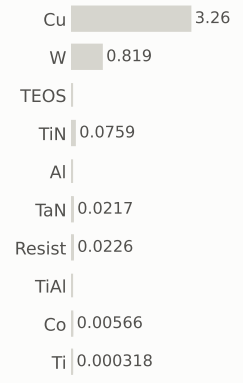

gases emitted (g)

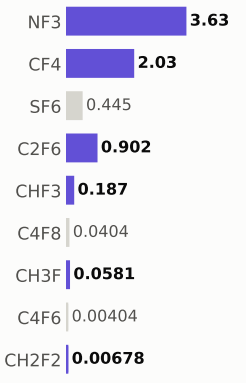

Step #15260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	501.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

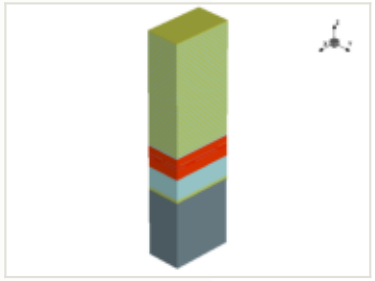

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

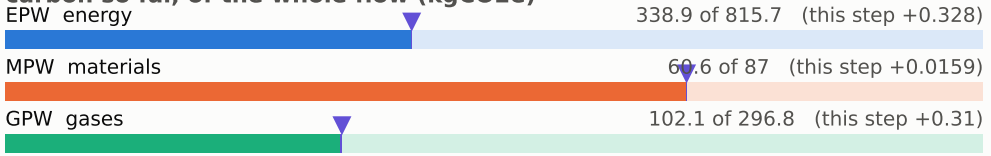

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

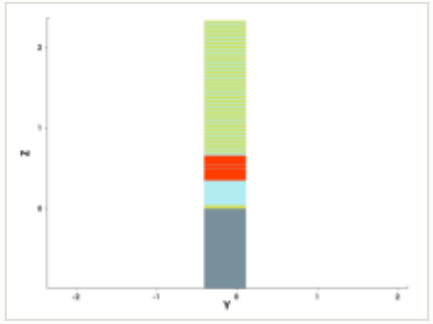

y cut at -0.150 µm

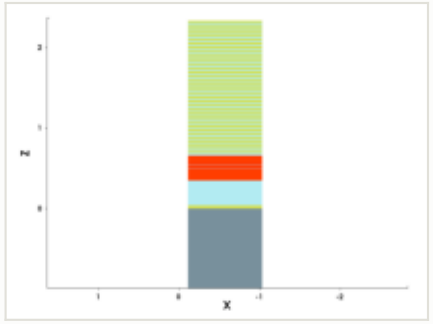

mask for this step

no mask for this step

steps by process area

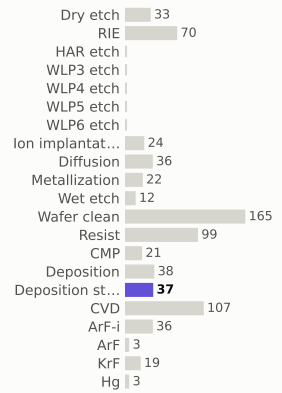

materials deposited (g)

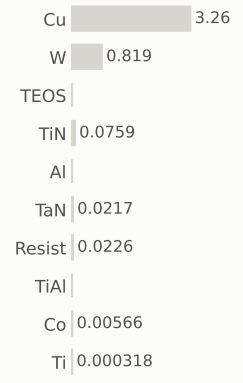

gases emitted (g)

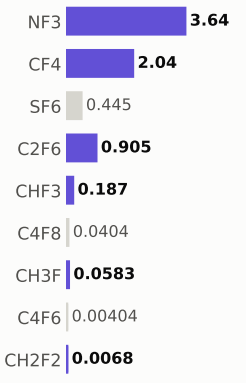

Step #15270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	502.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

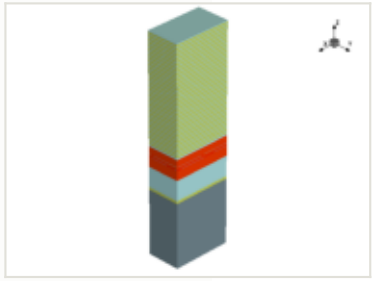

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

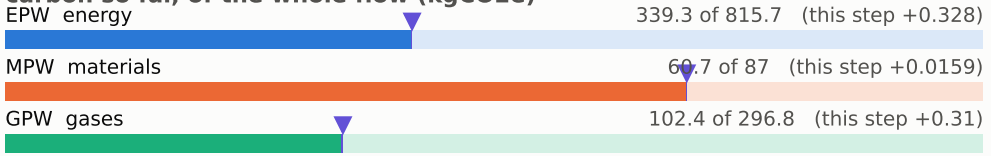

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

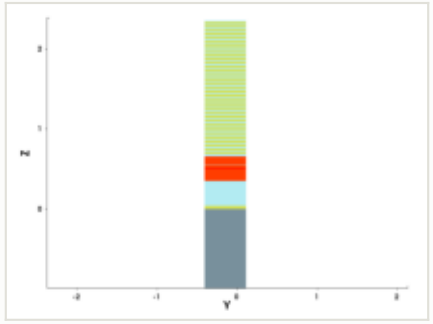

y cut at -0.150 µm

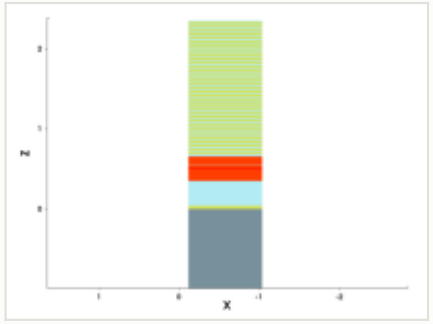

mask for this step

no mask for this step

steps by process area

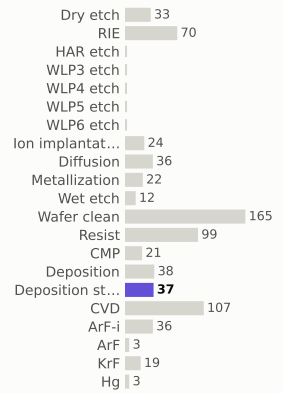

materials deposited (g)

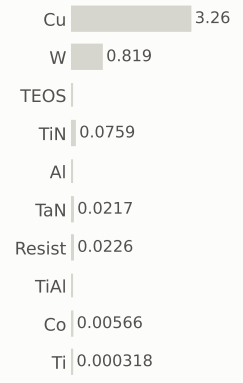

gases emitted (g)

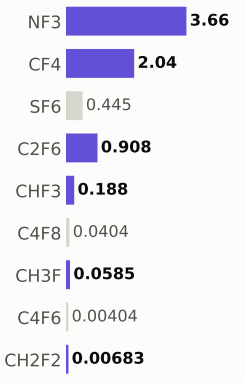

Step #15280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	503.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

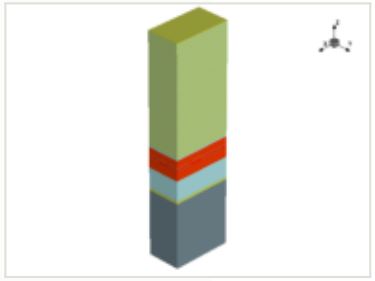

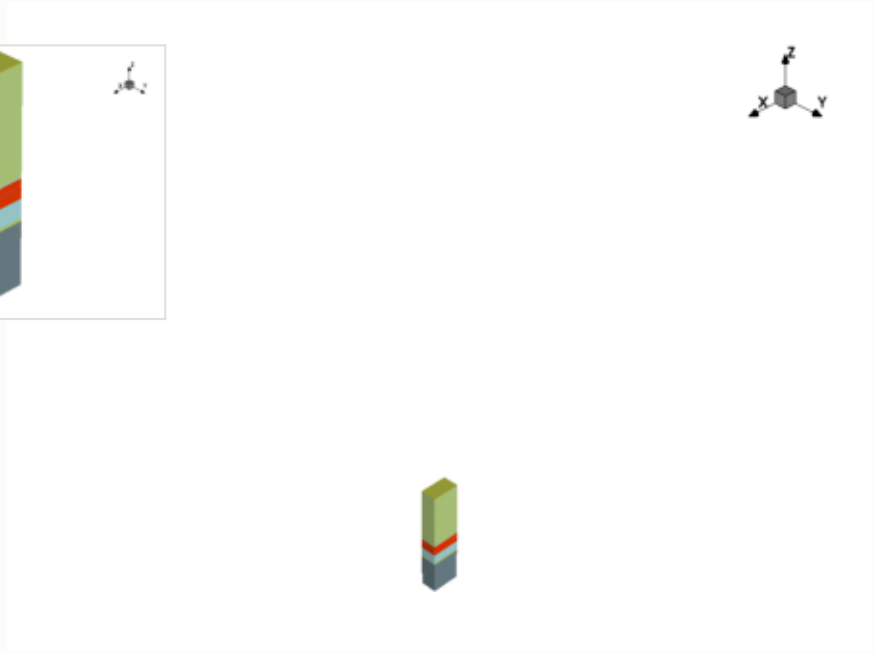

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

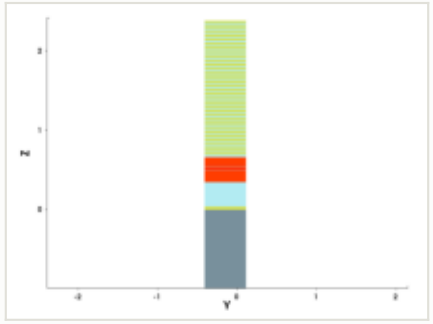

y cut at -0.150 µm

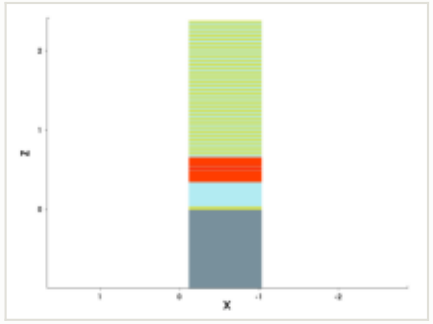

mask for this step

no mask for this step

steps by process area

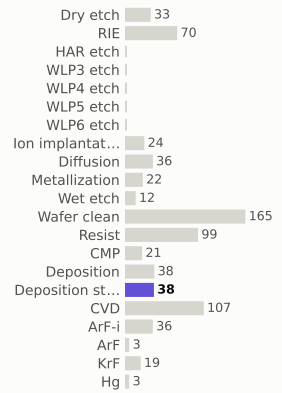

materials deposited (g)

gases emitted (g)

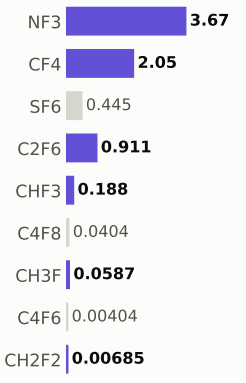

Step #15290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	503.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

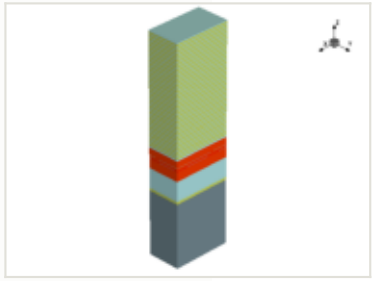

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

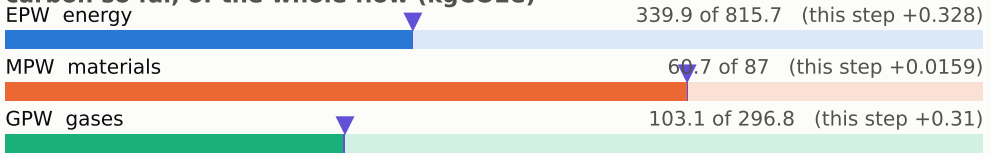

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

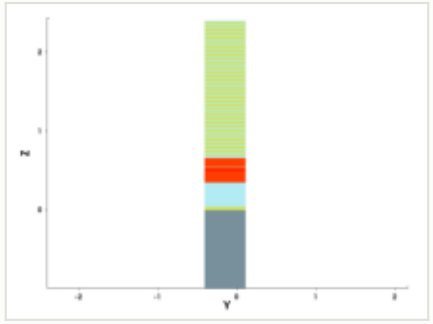

y cut at -0.150 µm

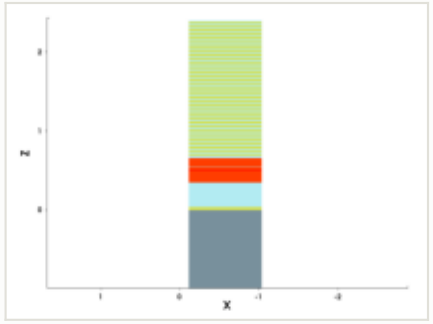

mask for this step

no mask for this step

steps by process area

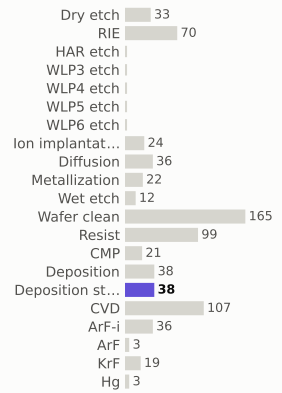

materials deposited (g)

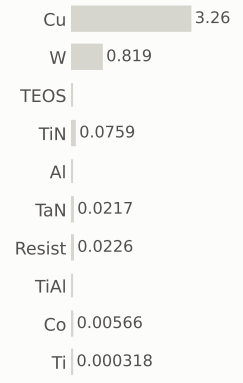

gases emitted (g)

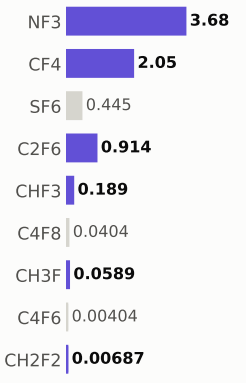

Step #15300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	504.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

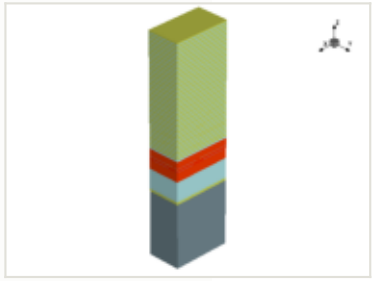

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

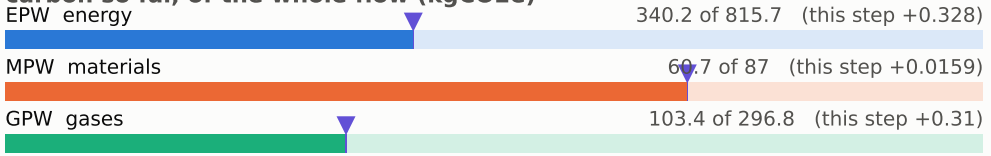

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

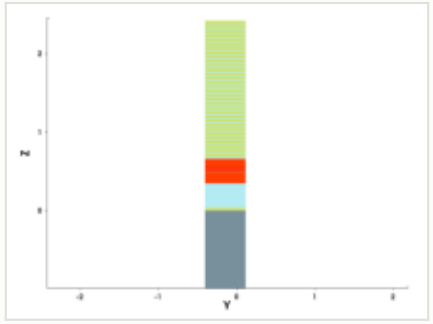

y cut at -0.150 µm

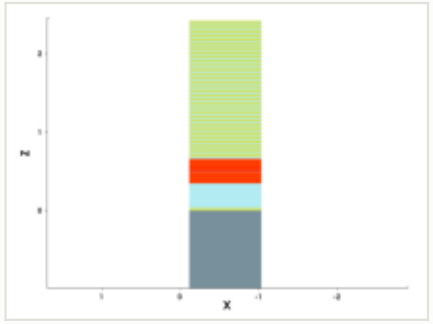

mask for this step

no mask for this step

steps by process area

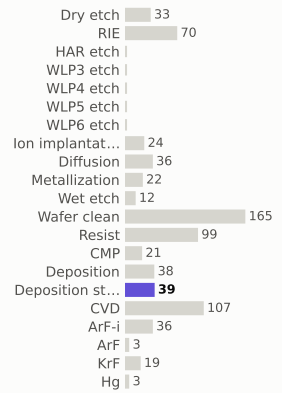

materials deposited (g)

gases emitted (g)

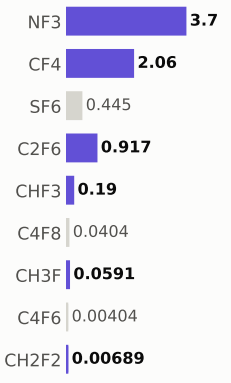

Step #15310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	505.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

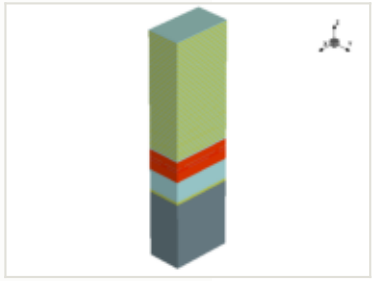

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

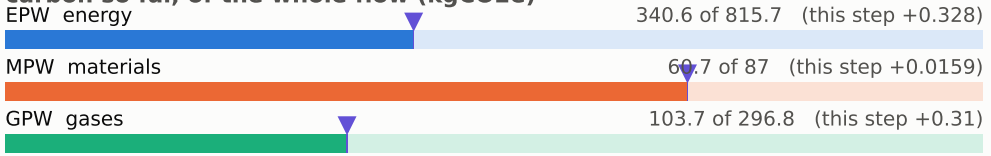

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

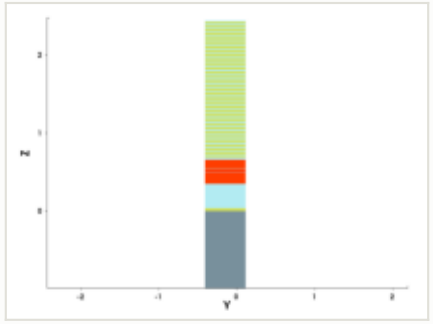

y cut at -0.150 µm

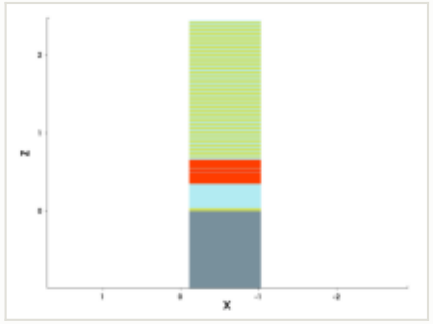

mask for this step

no mask for this step

steps by process area

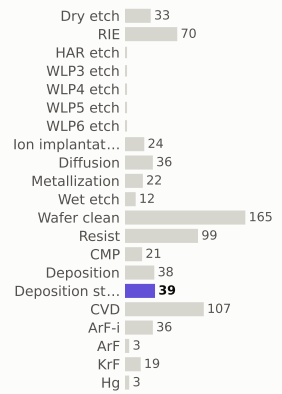

materials deposited (g)

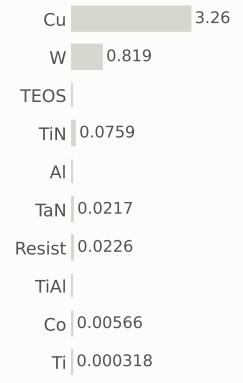

gases emitted (g)

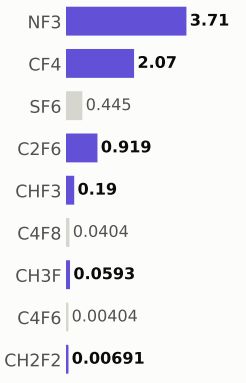

Step #15320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	505.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

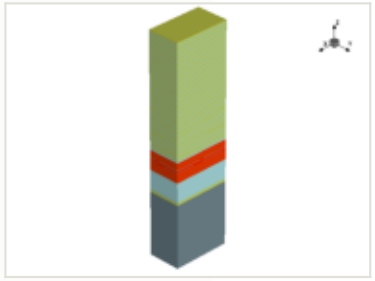

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

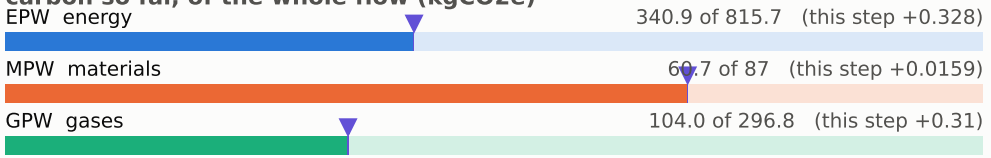

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

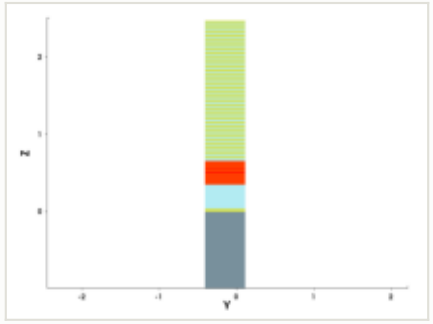

y cut at -0.150 µm

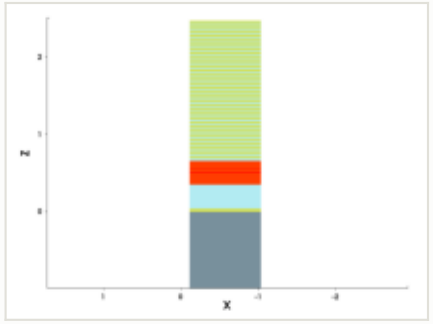

mask for this step

no mask for this step

steps by process area

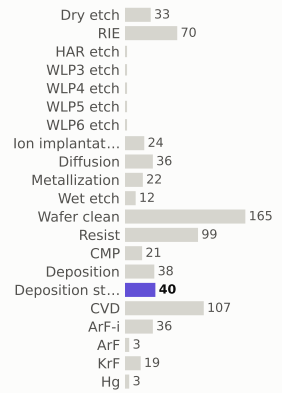

materials deposited (g)

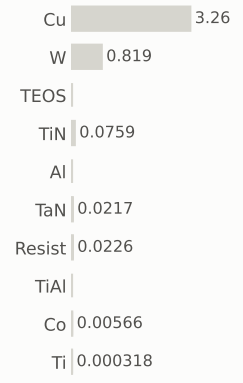

gases emitted (g)

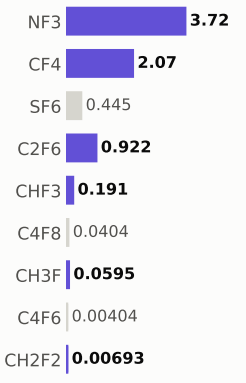

Step #15330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	506.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

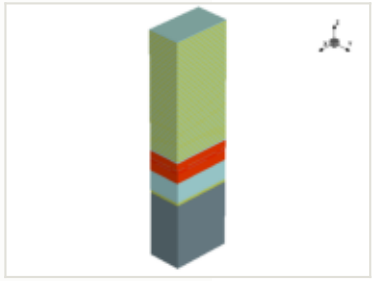

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

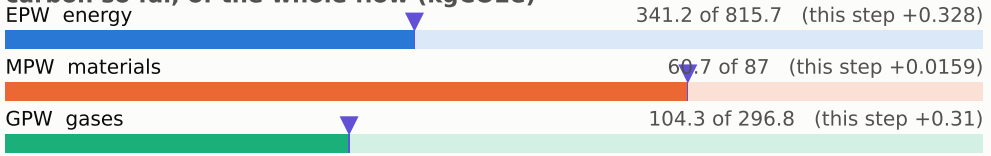

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

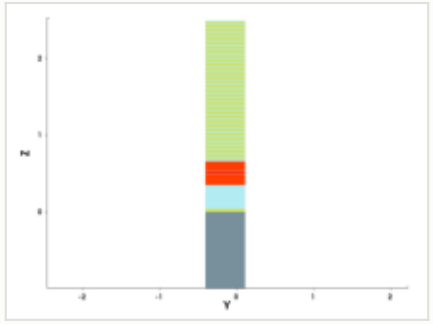

y cut at -0.150 µm

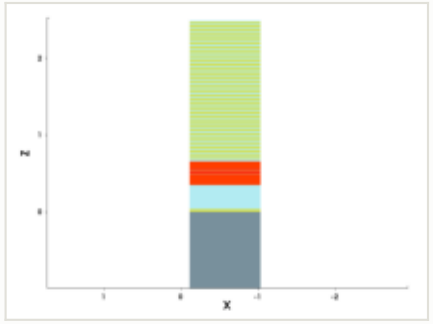

mask for this step

no mask for this step

steps by process area

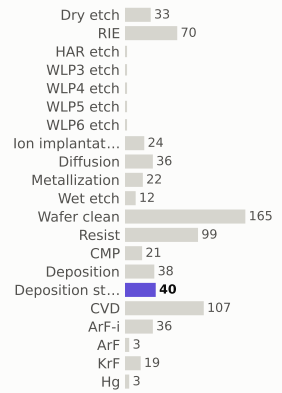

materials deposited (g)

gases emitted (g)

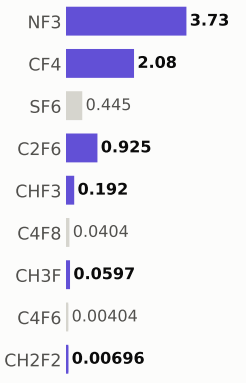

Step #15340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	506.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

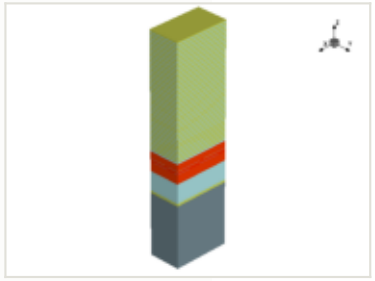

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

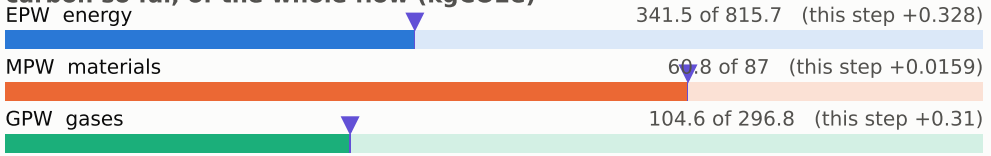

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

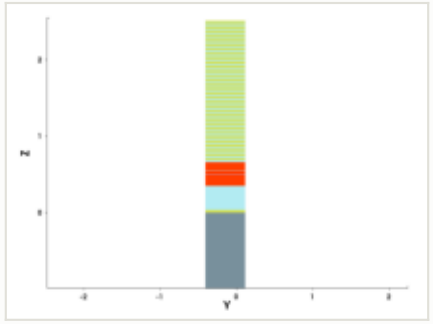

y cut at -0.150 µm

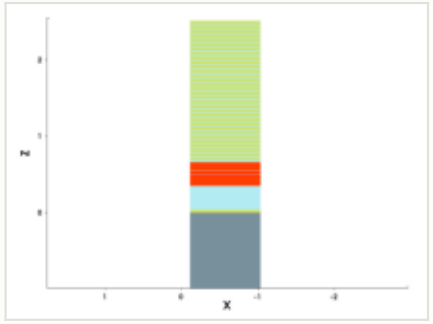

mask for this step

no mask for this step

steps by process area

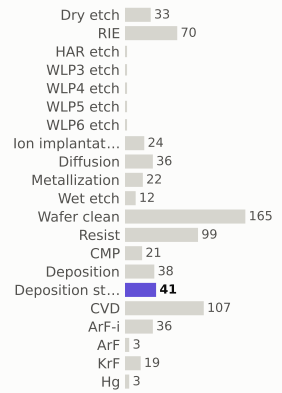

materials deposited (g)

gases emitted (g)

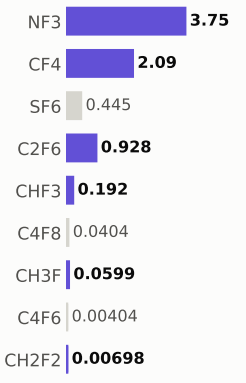

Step #15350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	507.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

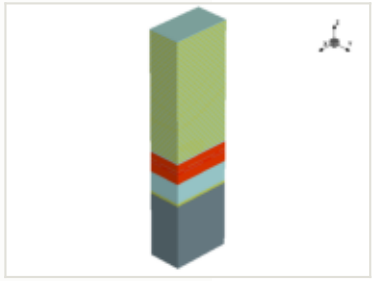

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

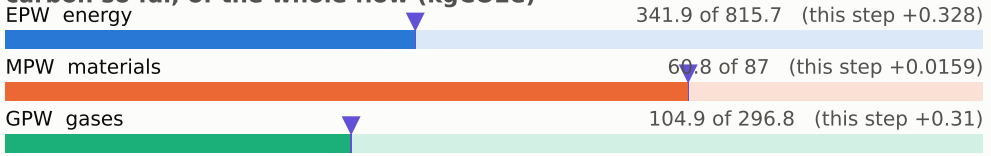

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

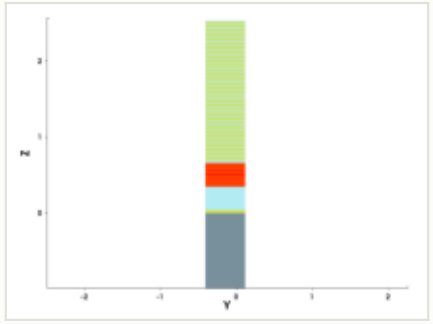

y cut at -0.150 µm

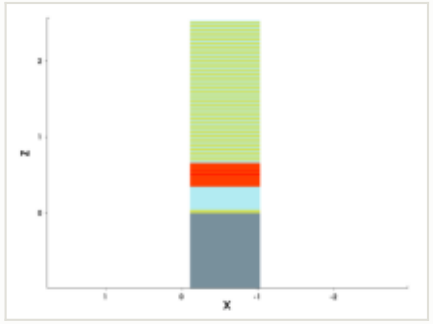

mask for this step

no mask for this step

steps by process area

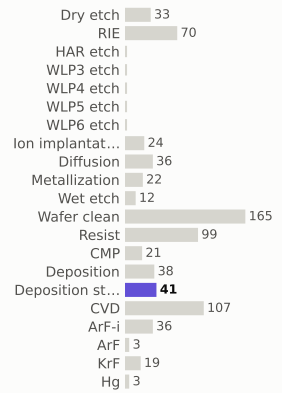

materials deposited (g)

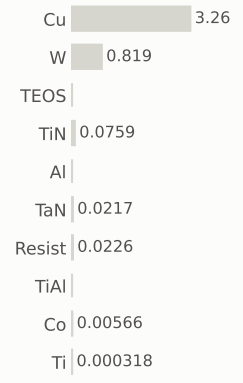

gases emitted (g)

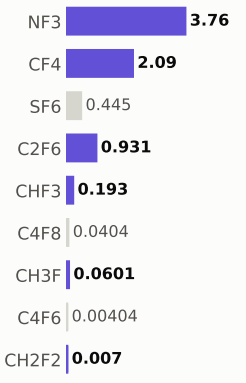

Step #15360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	508.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

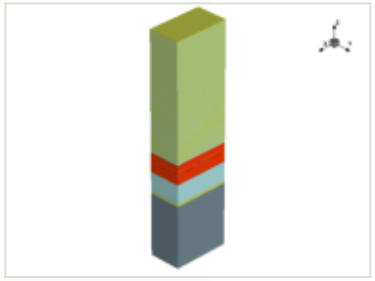

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

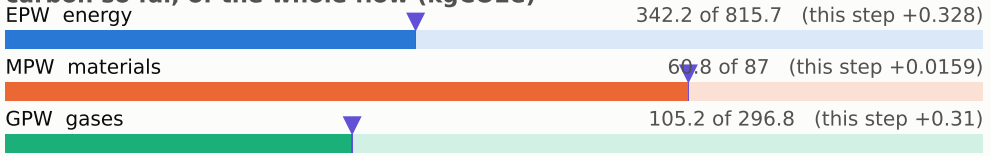

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

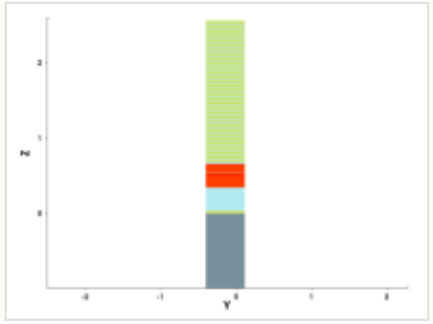

y cut at -0.150 µm

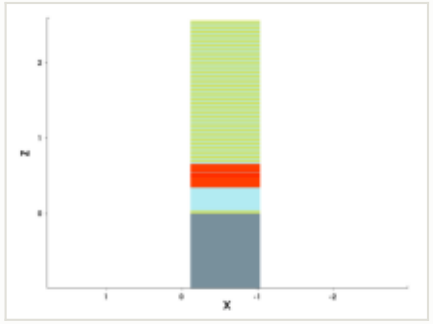

mask for this step

no mask for this step

steps by process area

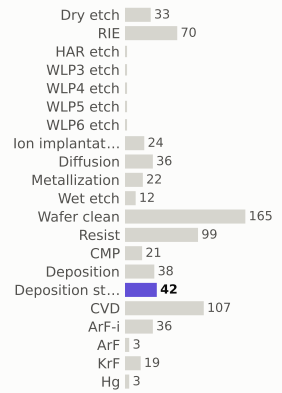

materials deposited (g)

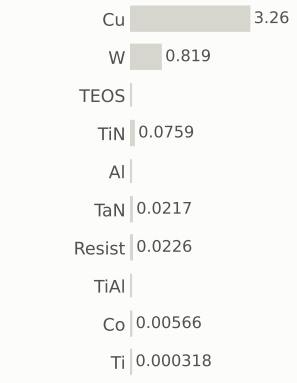

gases emitted (g)

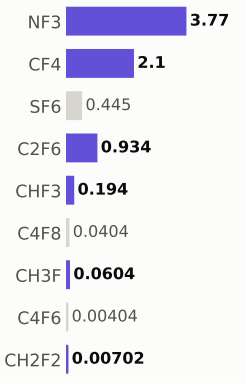

Step #15370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	508.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

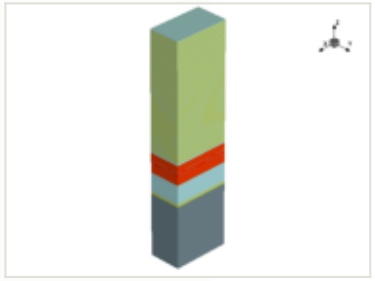

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

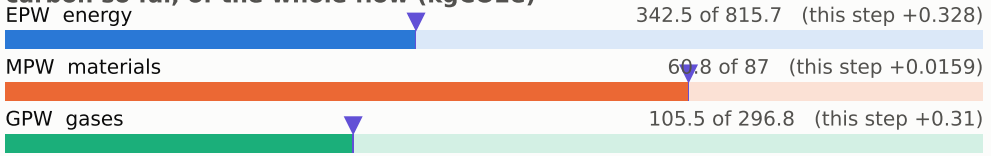

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

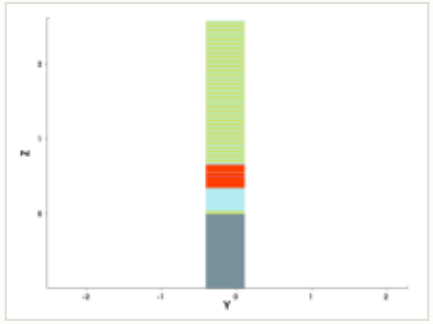

y cut at -0.150 µm

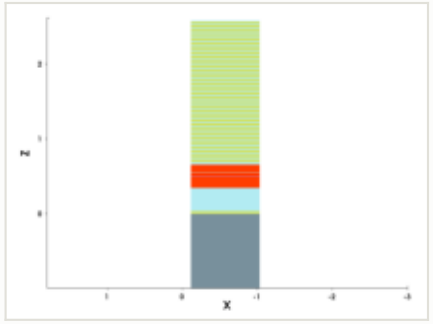

mask for this step

no mask for this step

steps by process area

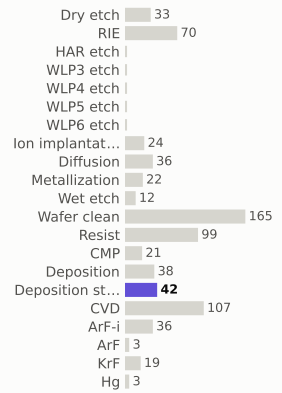

materials deposited (g)

gases emitted (g)

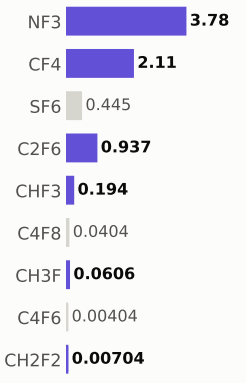

Step #15380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	509.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

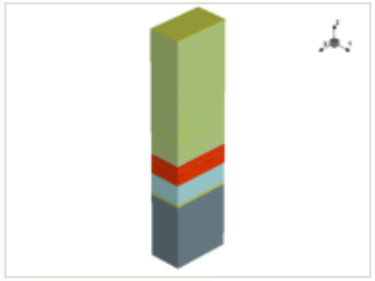

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

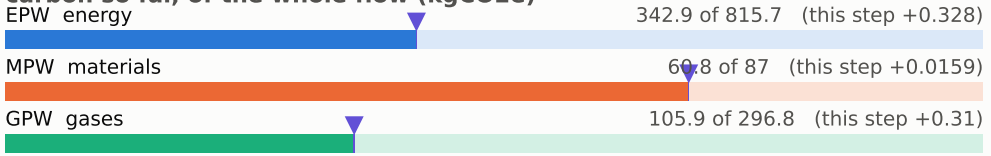

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

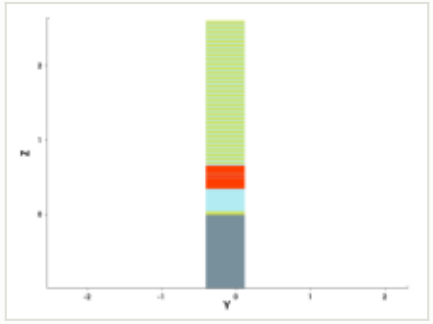

y cut at -0.150 µm

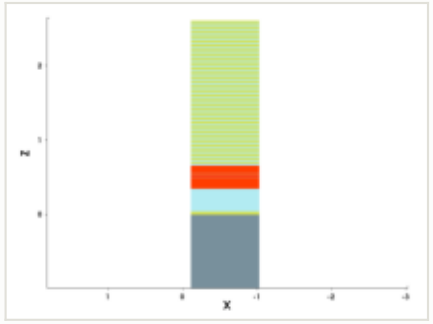

mask for this step

no mask for this step

steps by process area

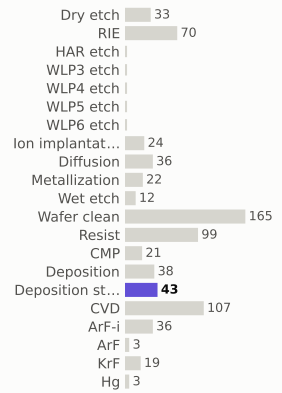

materials deposited (g)

gases emitted (g)



Step #15390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	510.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

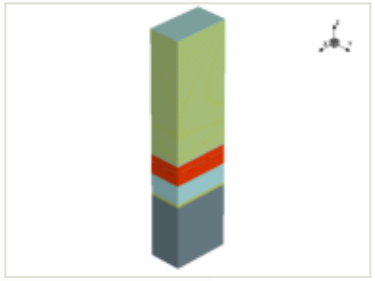

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

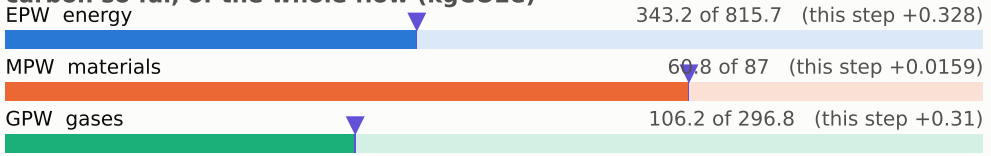

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

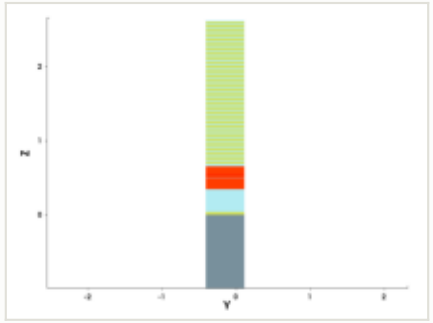

y cut at -0.150 µm

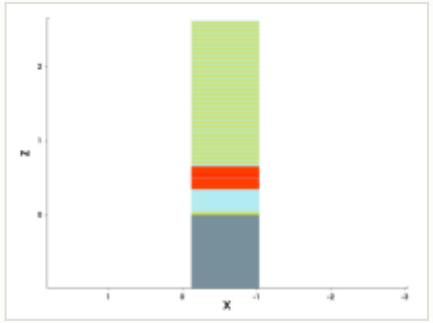

mask for this step

no mask for this step

steps by process area

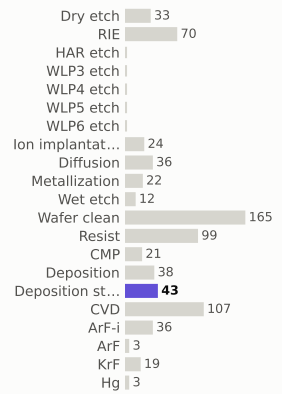

materials deposited (g)

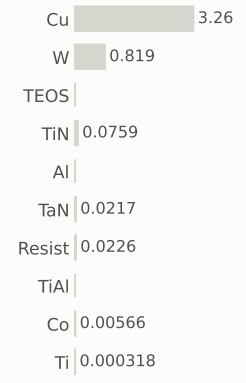

gases emitted (g)

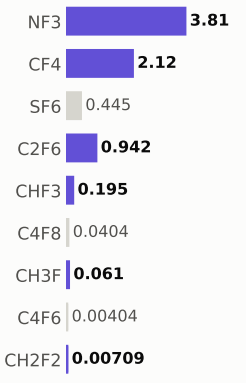

Step #15400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	510.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

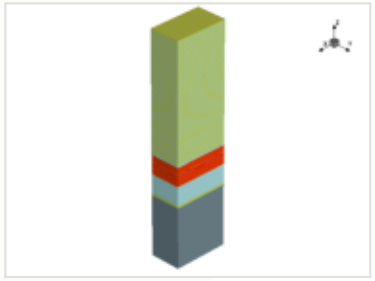

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

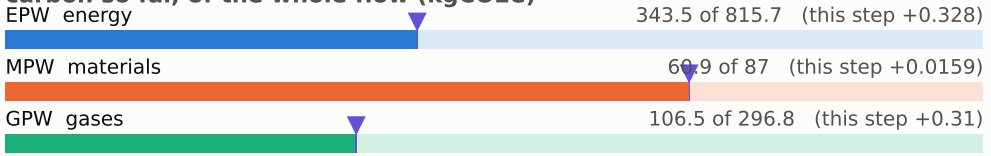

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

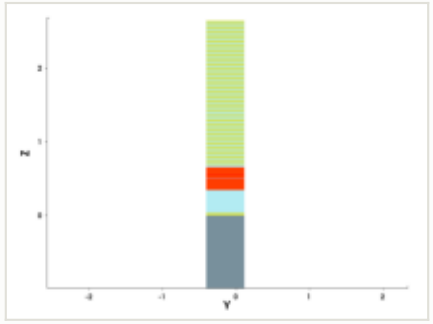

y cut at -0.150 µm

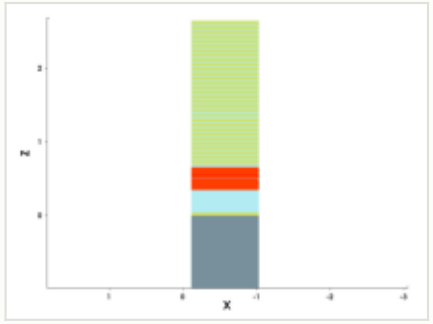

mask for this step

no mask for this step

steps by process area

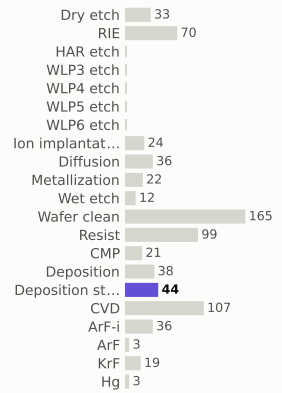

materials deposited (g)

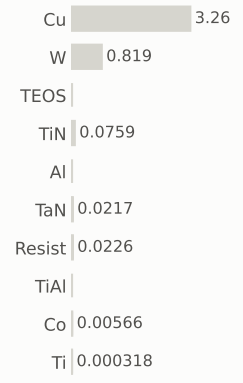

gases emitted (g)

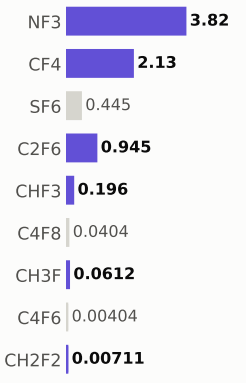

Step #15410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	511.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

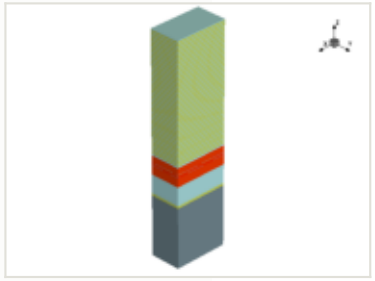

x cut at -0.570 µm

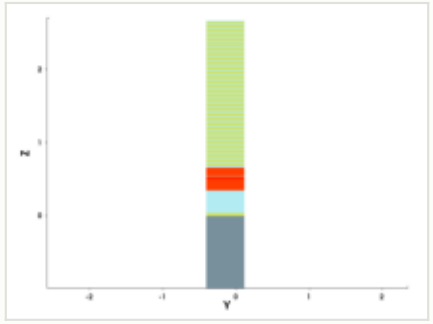

y cut at -0.150 µm

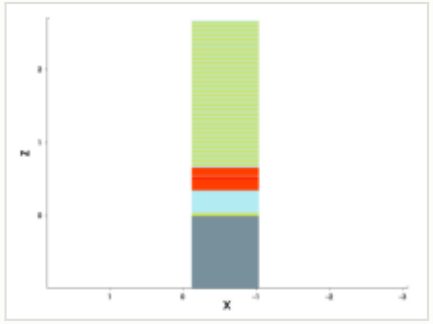

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

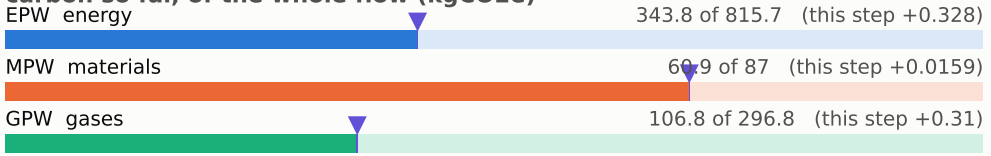

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

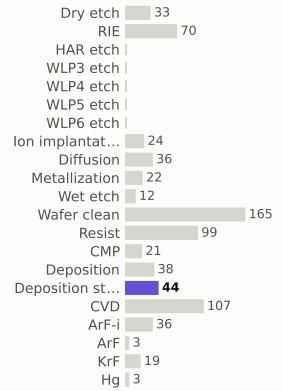

materials deposited (g)

gases emitted (g)

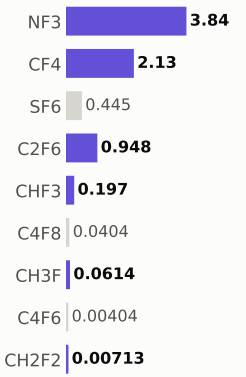

Step #15420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	512.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

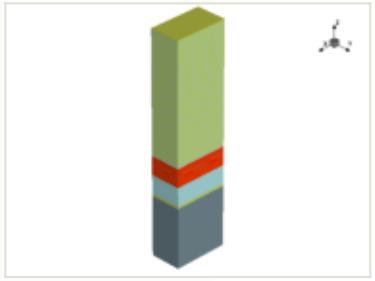

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

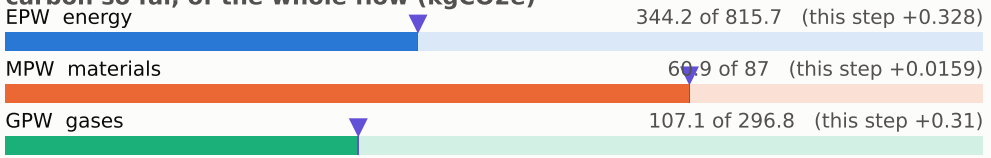

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

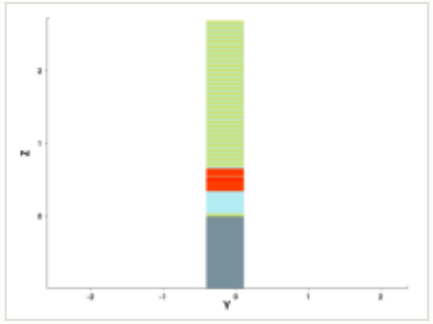

y cut at -0.150 µm

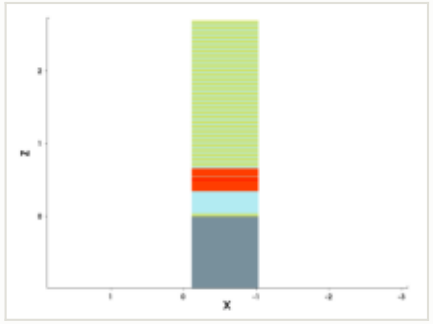

mask for this step

no mask for this step

steps by process area

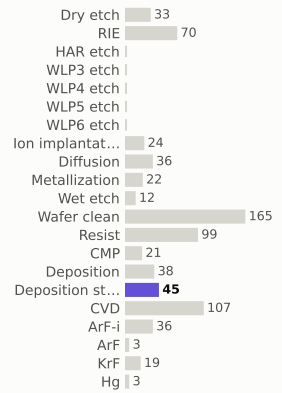

materials deposited (g)

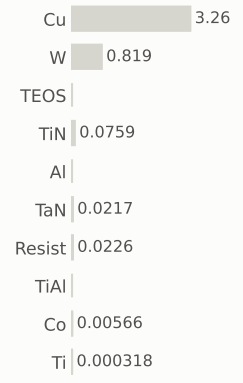

gases emitted (g)

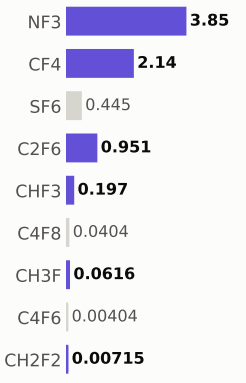

Step #15430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	512.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

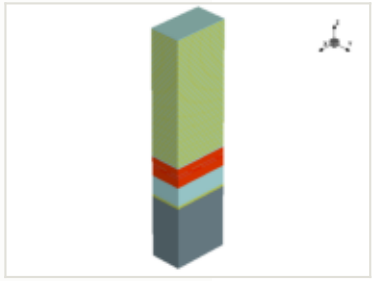

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

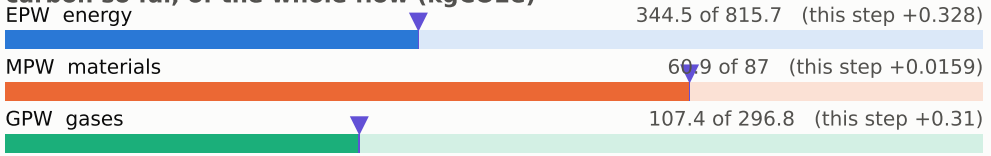

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

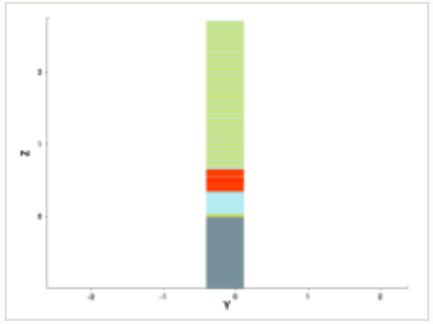

y cut at -0.150 µm

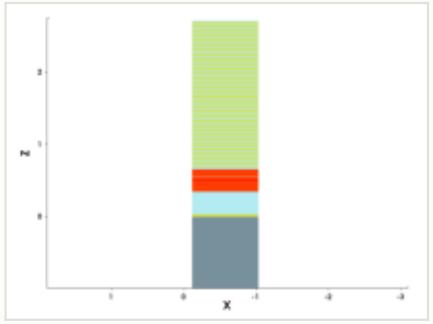

mask for this step

no mask for this step

steps by process area

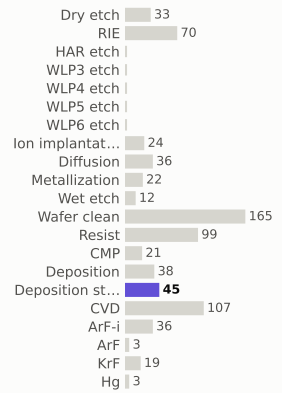

materials deposited (g)

gases emitted (g)

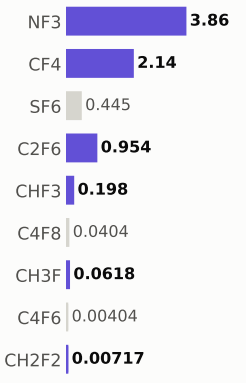

Step #15440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	513.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

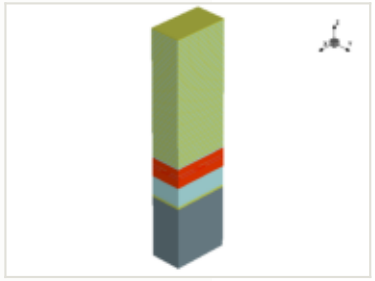

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

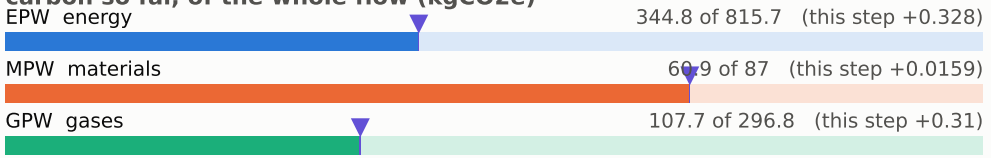

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

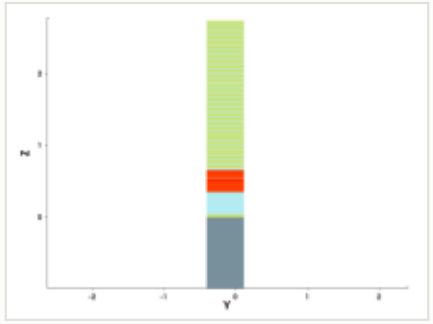

y cut at -0.150 µm

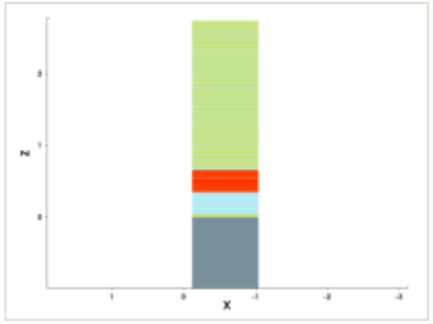

mask for this step

no mask for this step

steps by process area

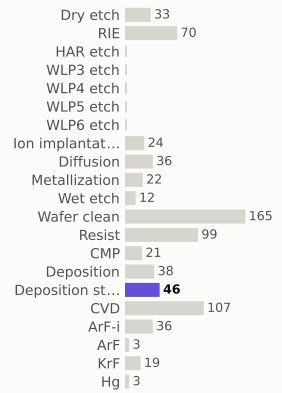

materials deposited (g)

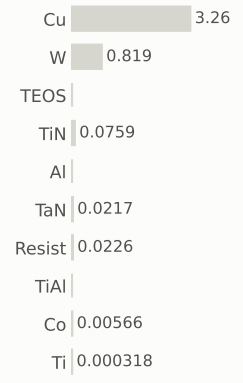

gases emitted (g)

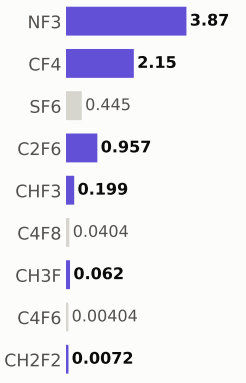

Step #15450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	514.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

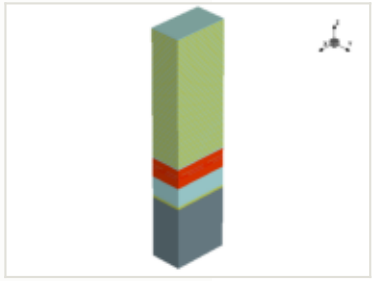

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

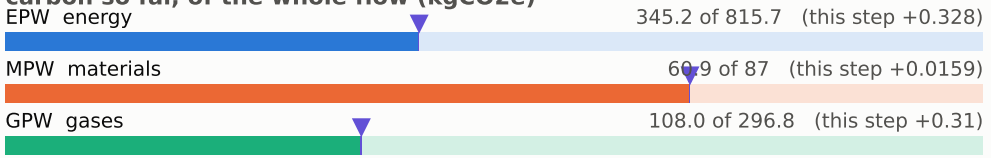

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

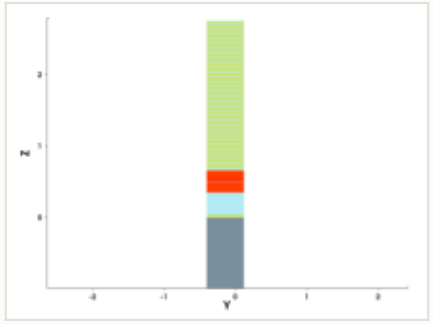

y cut at -0.150 µm

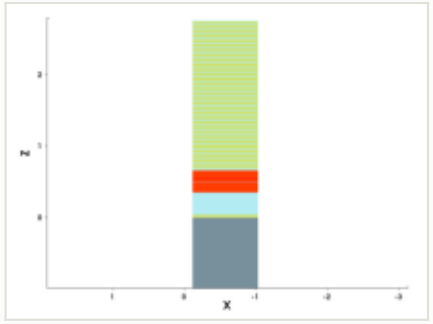

mask for this step

no mask for this step

steps by process area

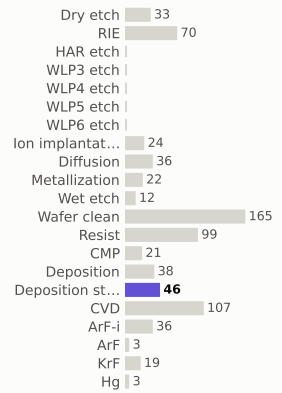

materials deposited (g)

gases emitted (g)

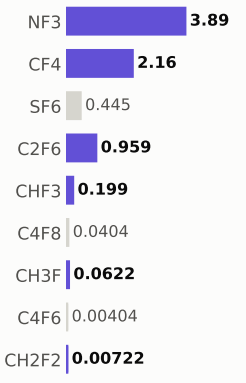

Step #15460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	514.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

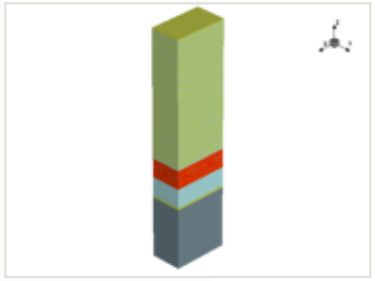

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

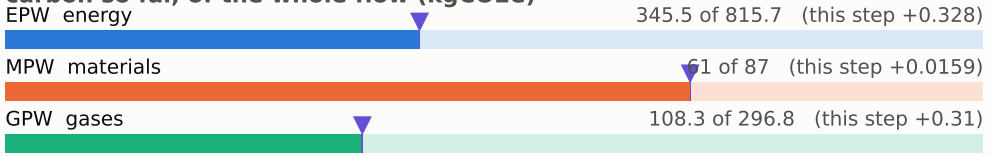

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

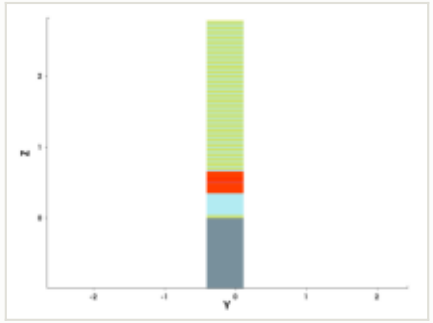

y cut at -0.150 µm

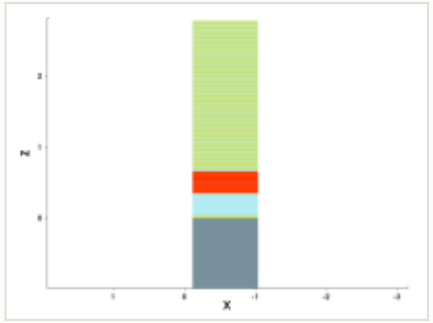

mask for this step

no mask for this step

steps by process area

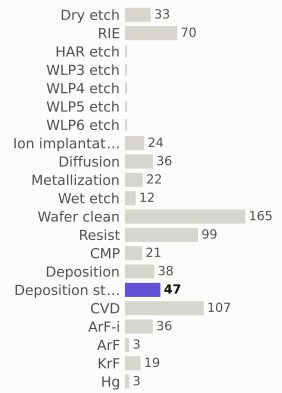

materials deposited (g)

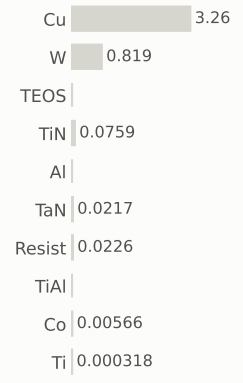

gases emitted (g)

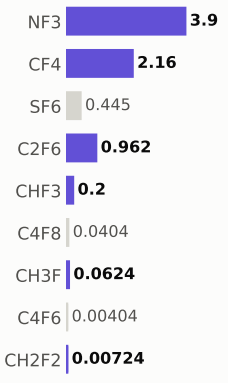

Step #15470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	515.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

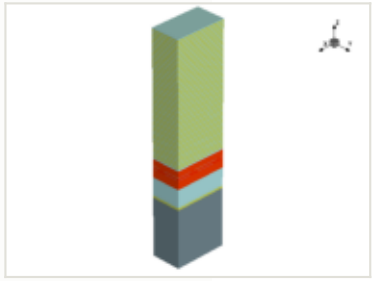

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

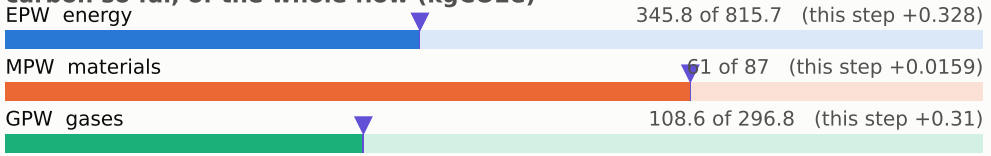

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

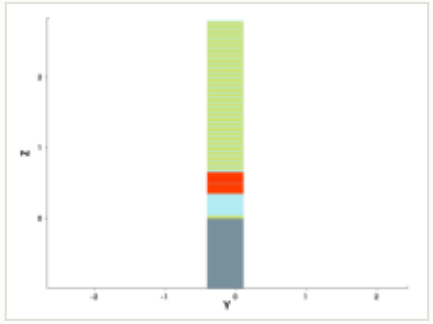

y cut at -0.150 µm

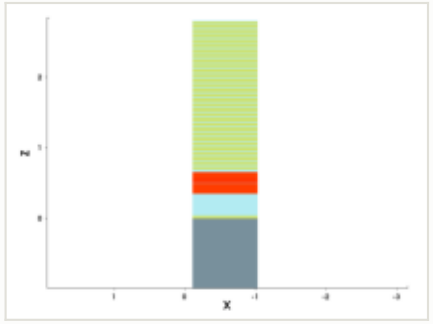

mask for this step

no mask for this step

steps by process area

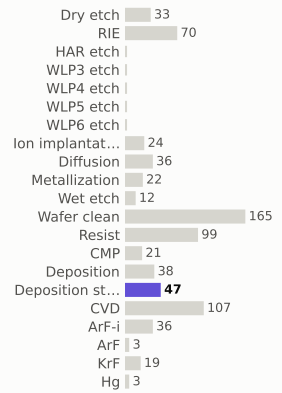

materials deposited (g)

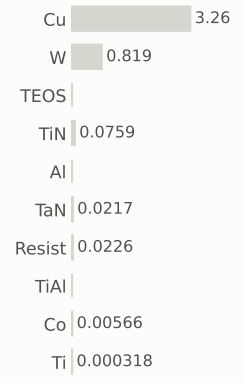

gases emitted (g)

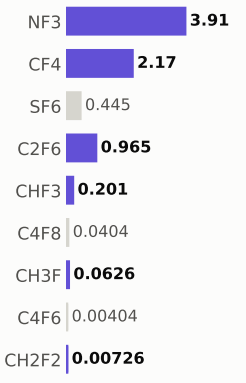

Step #15480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	516.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

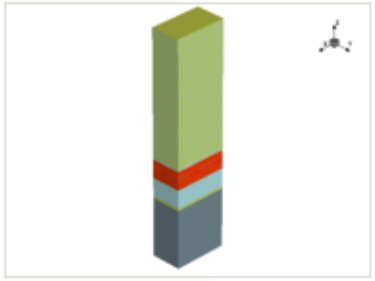

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

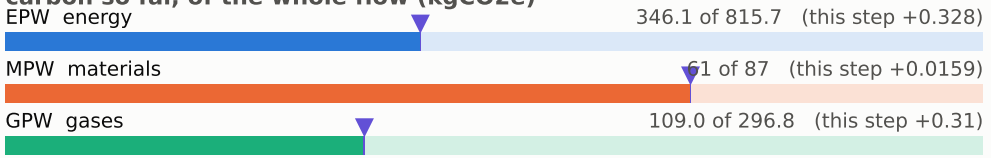

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

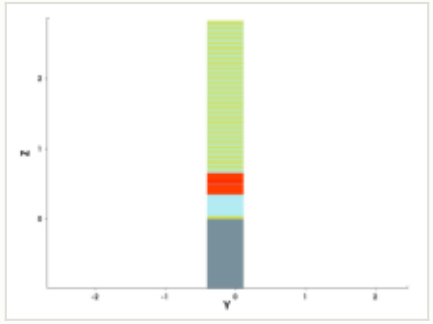

y cut at -0.150 µm

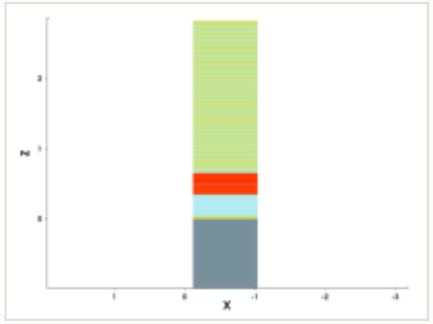

mask for this step

no mask for this step

steps by process area

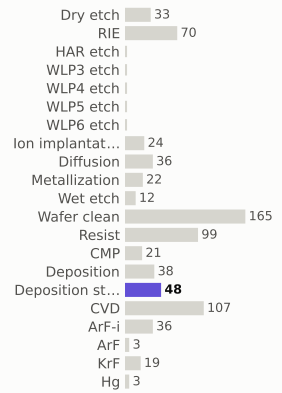

materials deposited (g)

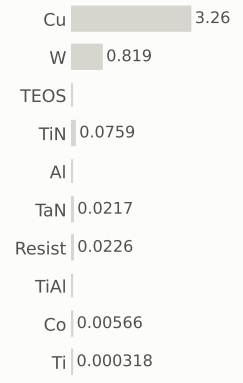

gases emitted (g)

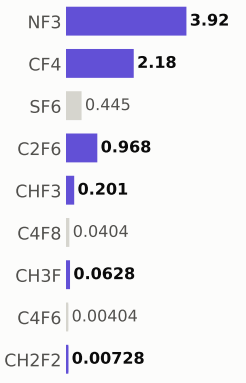

Step #15490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	516.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

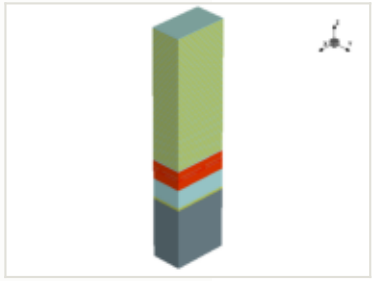

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

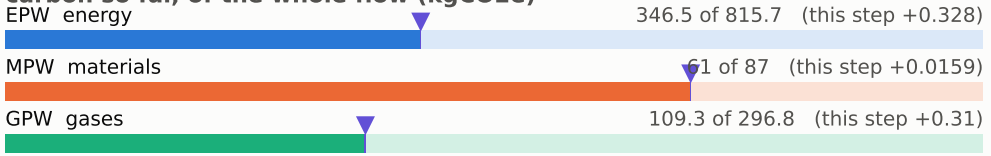

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

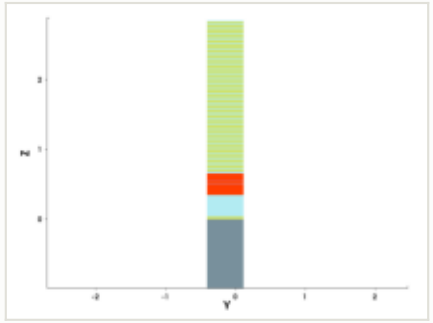

y cut at -0.150 µm

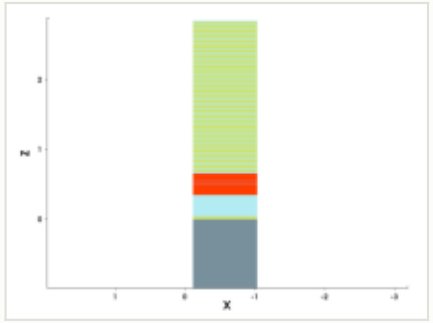

mask for this step

no mask for this step

steps by process area

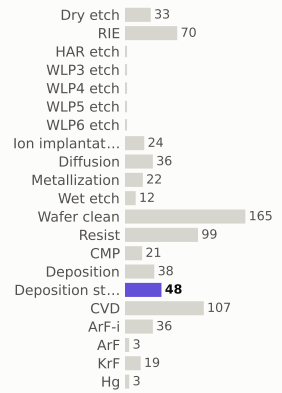

materials deposited (g)

gases emitted (g)

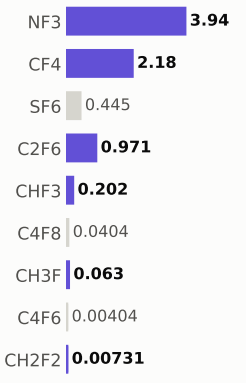

Step #15500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	517.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

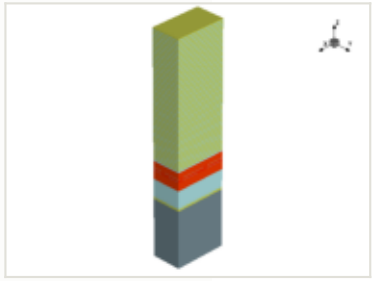

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

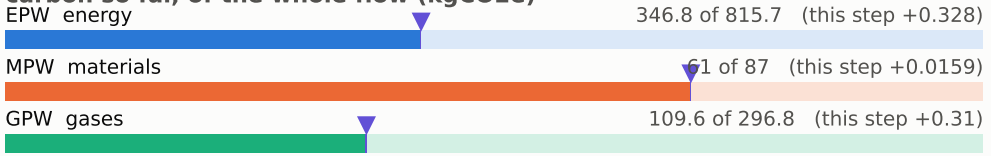

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

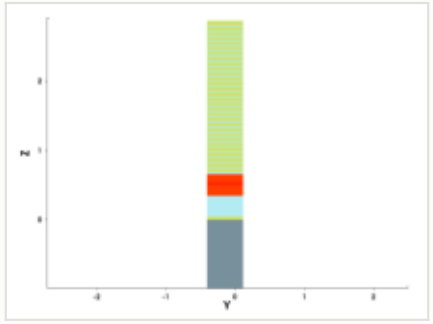

y cut at -0.150 µm

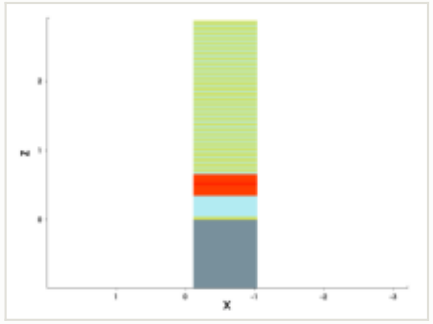

mask for this step

no mask for this step

steps by process area

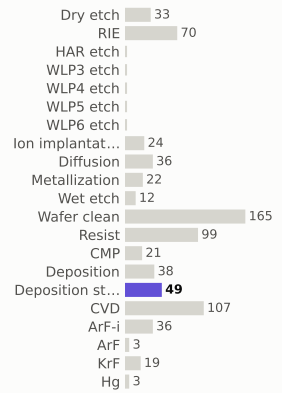

materials deposited (g)

gases emitted (g)

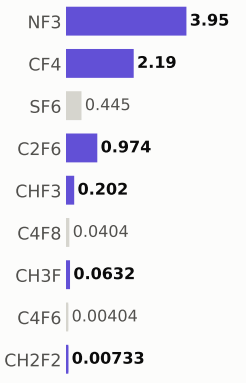

Step #15510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	518.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

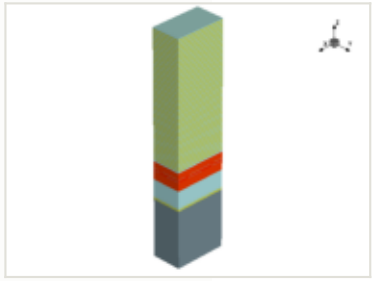

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

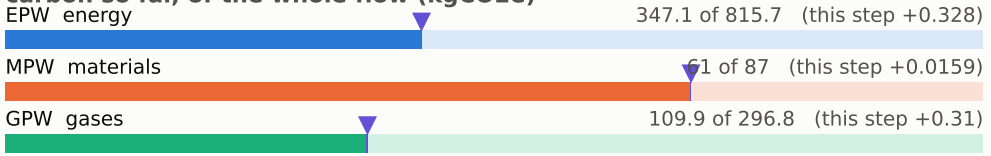

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

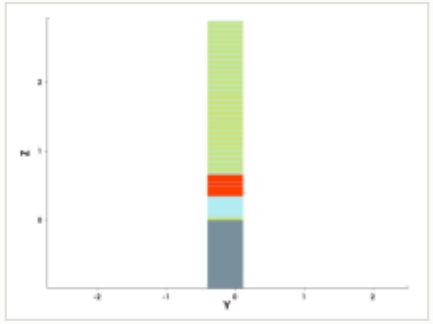

y cut at -0.150 µm

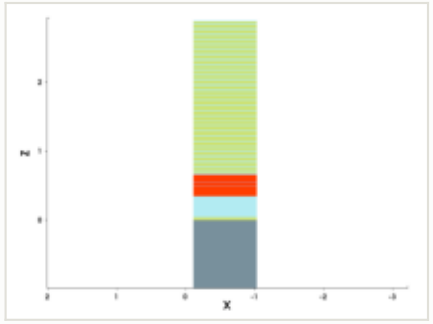

mask for this step

no mask for this step

steps by process area

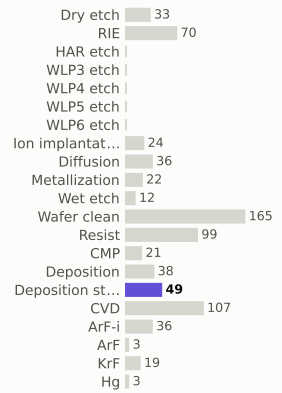

materials deposited (g)

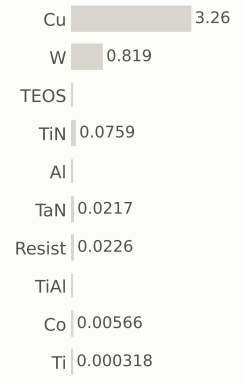

gases emitted (g)

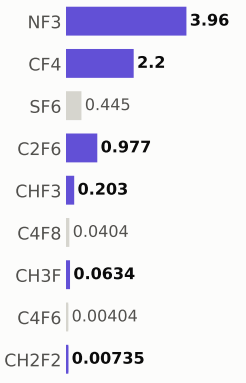

Step #15520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	518.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

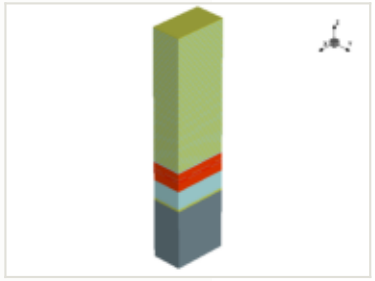

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

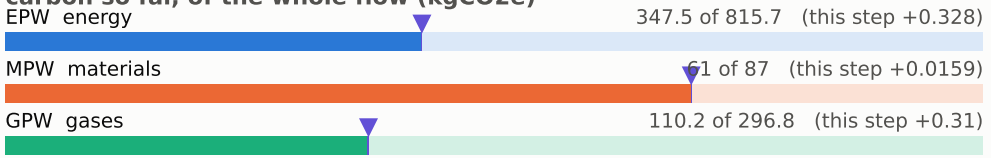

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

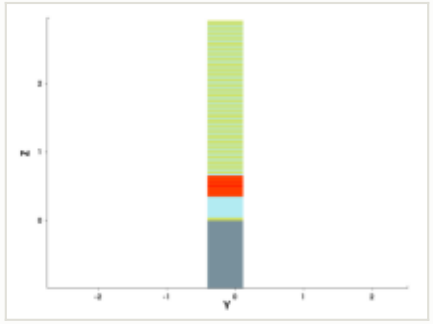

y cut at -0.150 µm

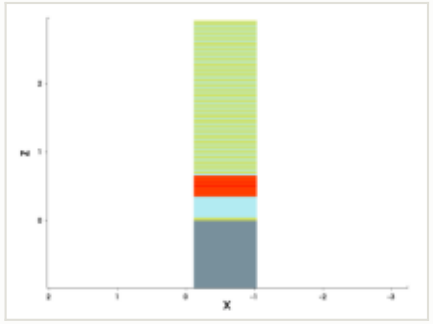

mask for this step

no mask for this step

steps by process area

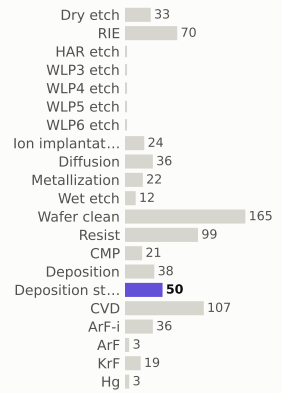

materials deposited (g)

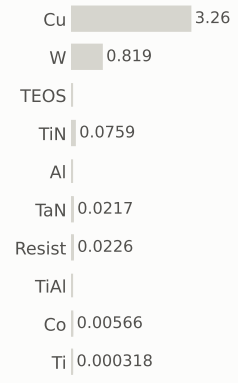

gases emitted (g)

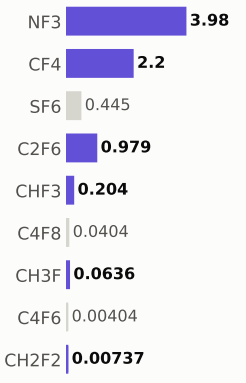

Step #15530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	519.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

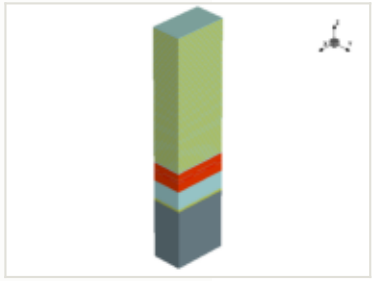

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

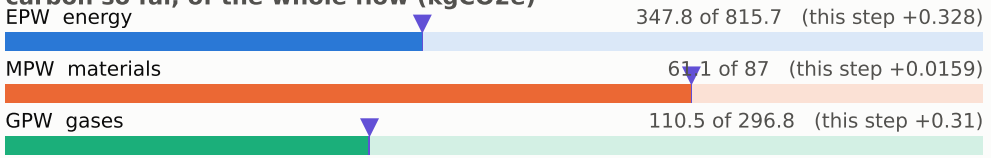

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

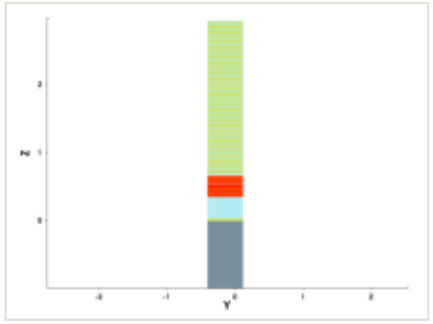

y cut at -0.150 µm

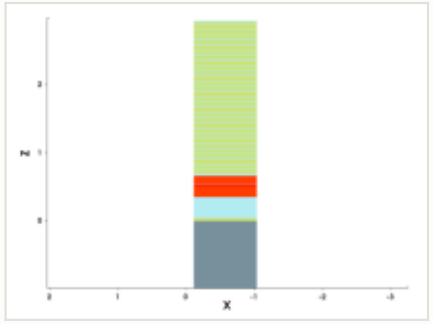

mask for this step

no mask for this step

steps by process area

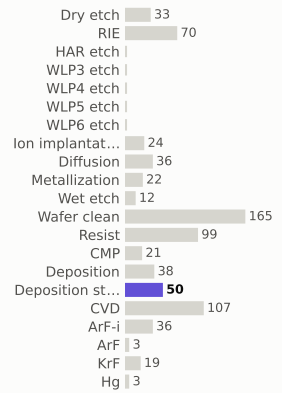

materials deposited (g)

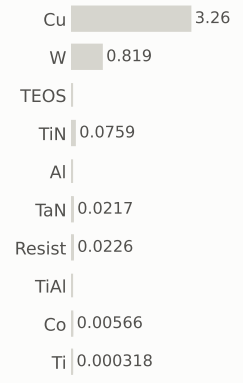

gases emitted (g)

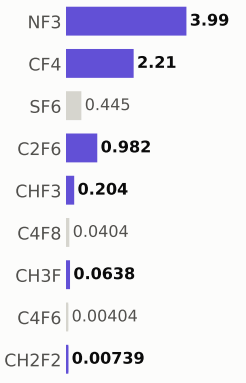

Step #15540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	520.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

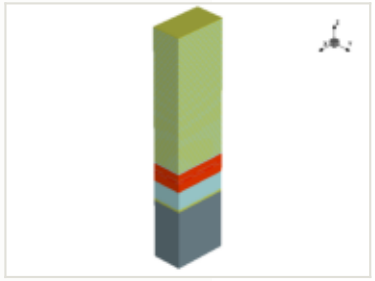

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

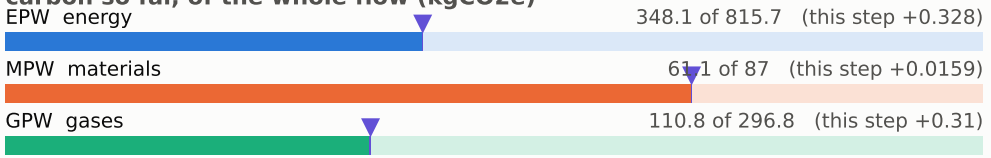

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

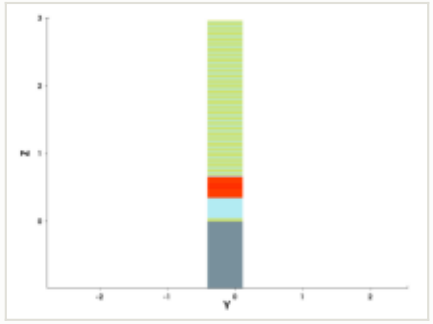

y cut at -0.150 µm

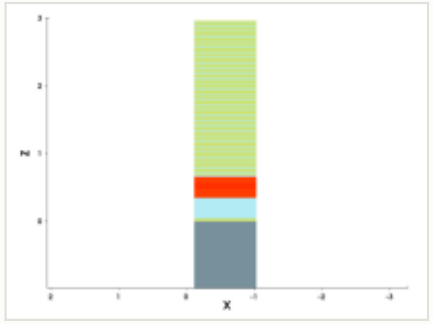

mask for this step

no mask for this step

steps by process area

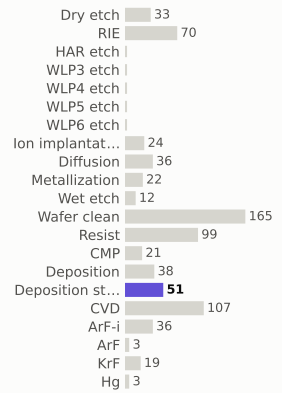

materials deposited (g)

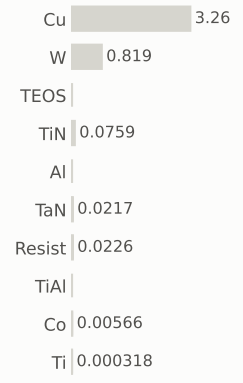

gases emitted (g)

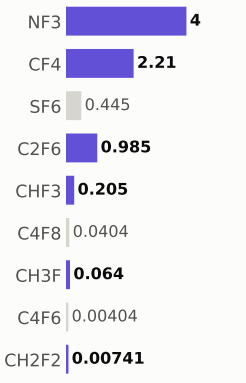

Step #15550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	520.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

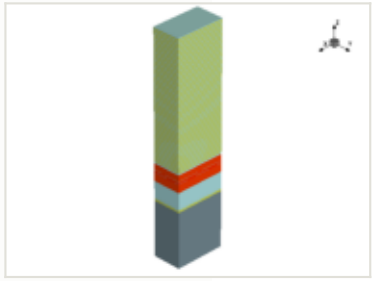

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

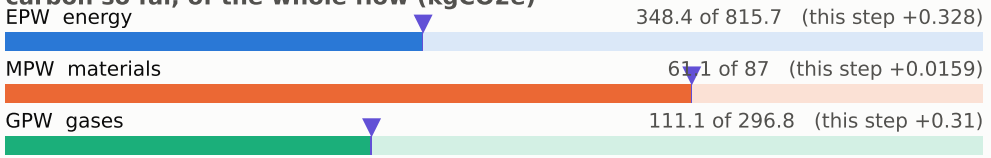

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

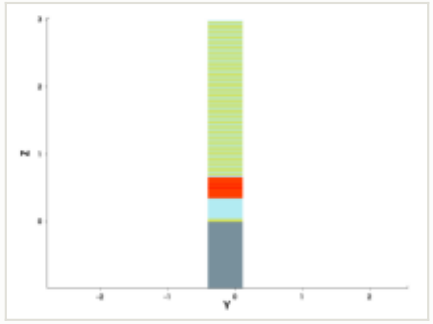

y cut at -0.150 µm

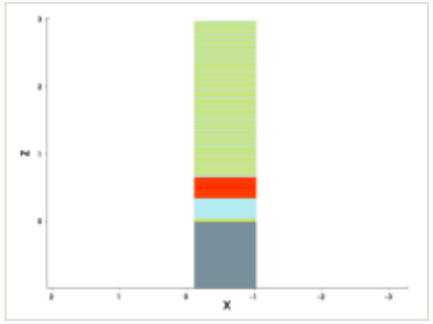

mask for this step

no mask for this step

steps by process area

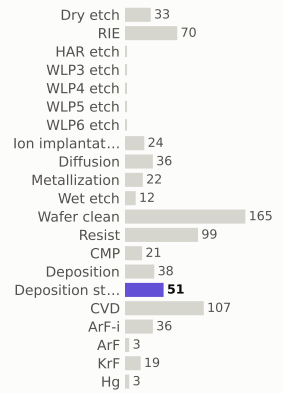

materials deposited (g)

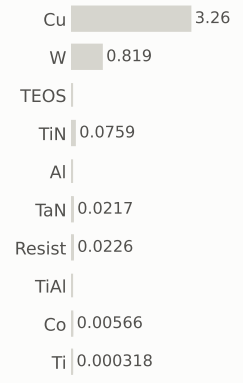

gases emitted (g)

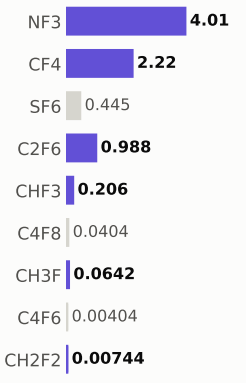

Step #15560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	521.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

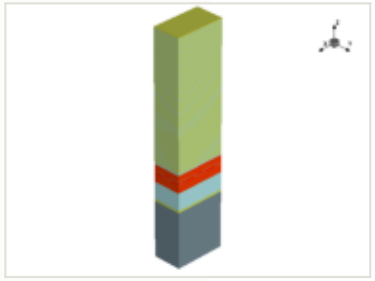

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

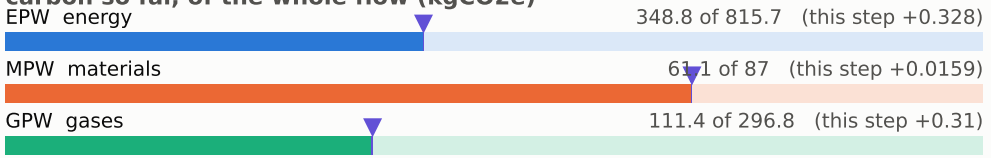

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

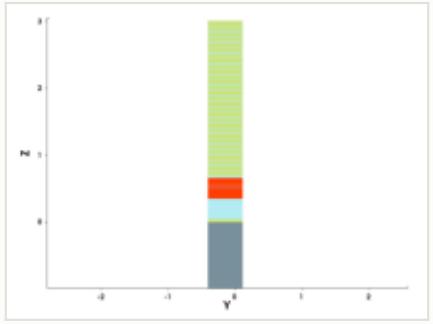

y cut at -0.150 µm

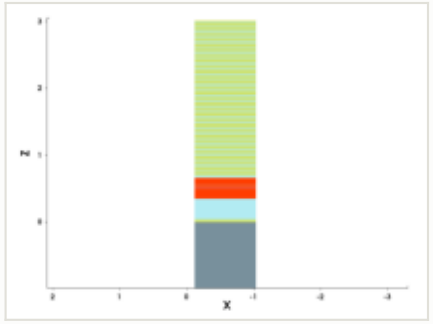

mask for this step

no mask for this step

steps by process area

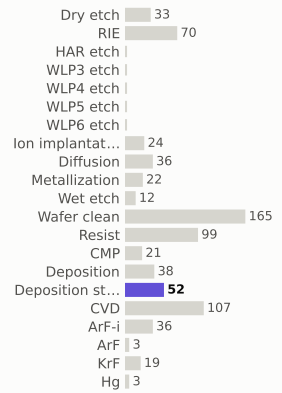

materials deposited (g)

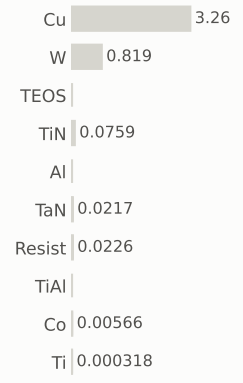

gases emitted (g)

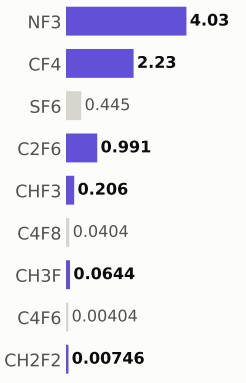

Step #15570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	522.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

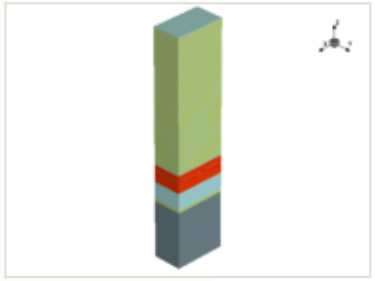

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

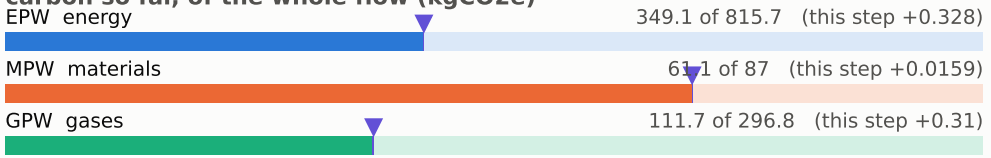

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

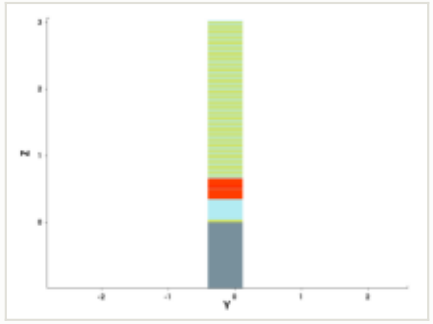

y cut at -0.150 µm

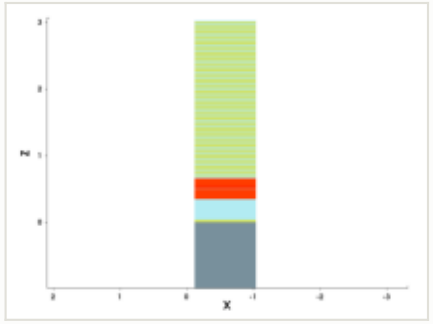

mask for this step

no mask for this step

steps by process area

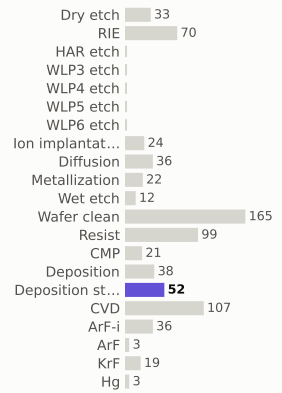

materials deposited (g)

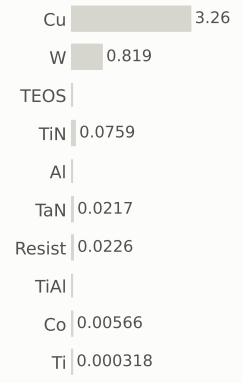

gases emitted (g)

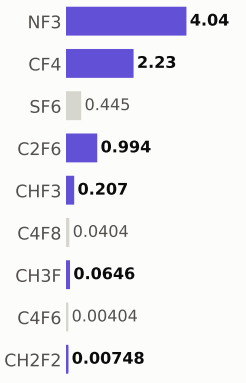

Step #15580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	522.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

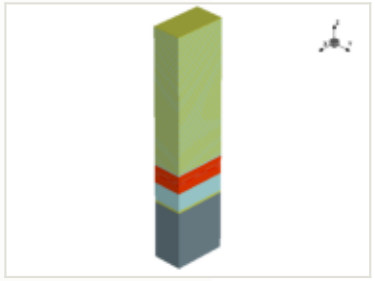

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

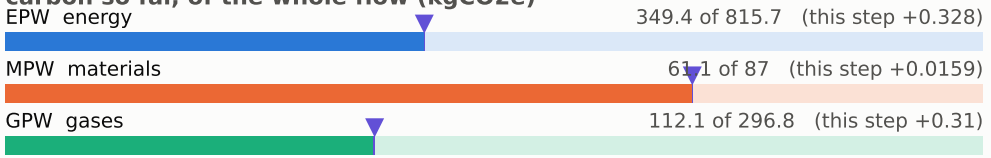

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

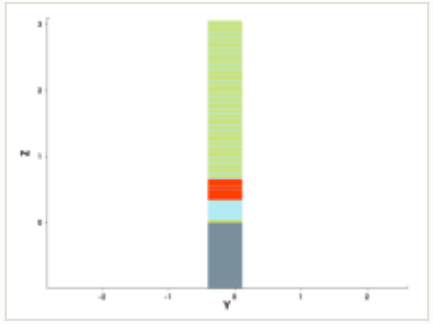

y cut at -0.150 µm

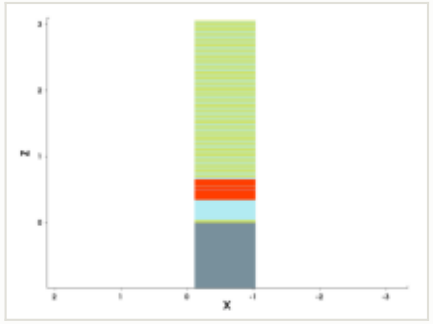

mask for this step

no mask for this step

steps by process area

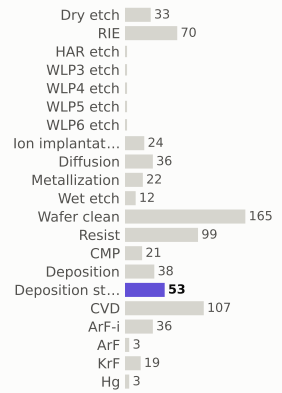

materials deposited (g)

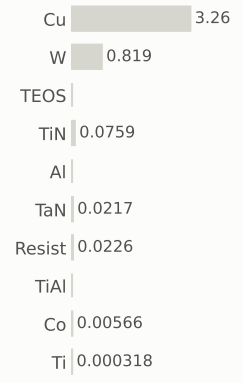

gases emitted (g)

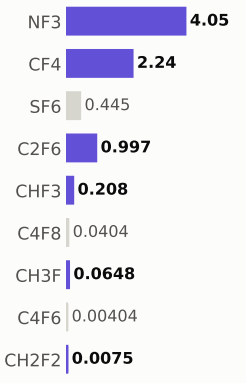

Step #15590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	523.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

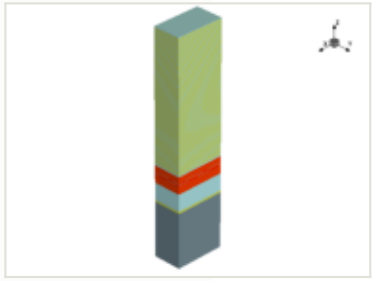

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

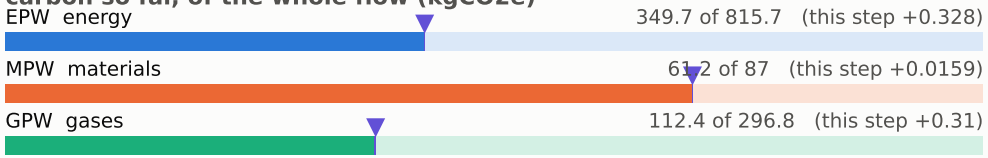

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

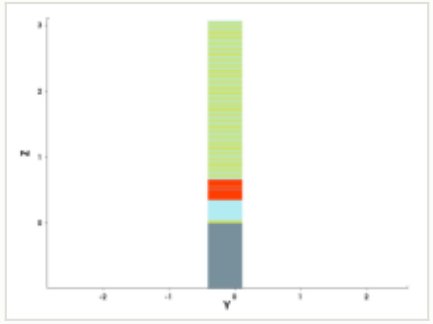

y cut at -0.150 µm

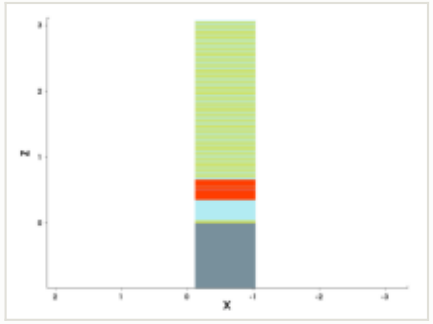

mask for this step

no mask for this step

steps by process area

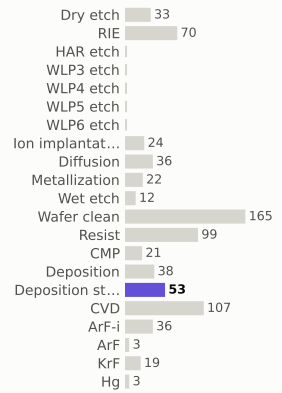

materials deposited (g)

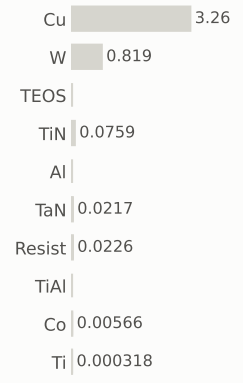

gases emitted (g)

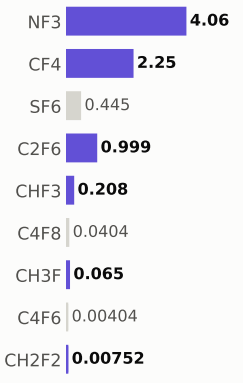

Step #15600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	523.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

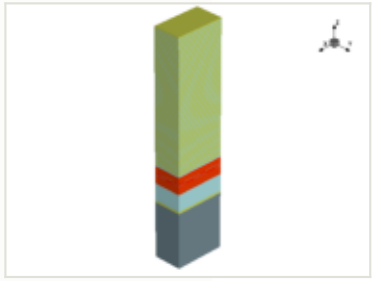

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

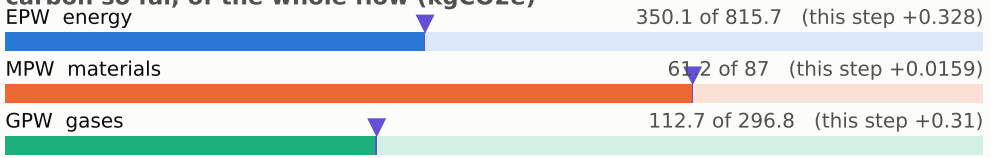

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

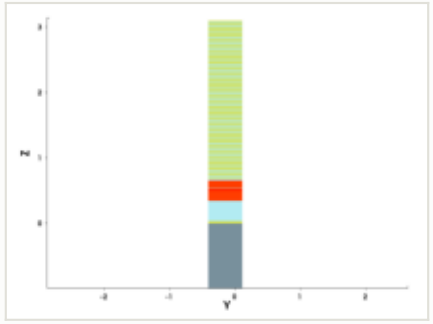

y cut at -0.150 µm

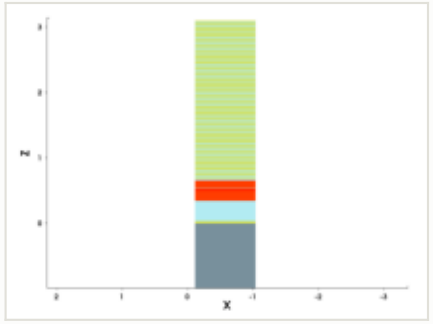

mask for this step

no mask for this step

steps by process area

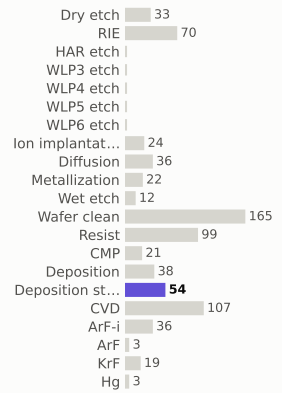

materials deposited (g)

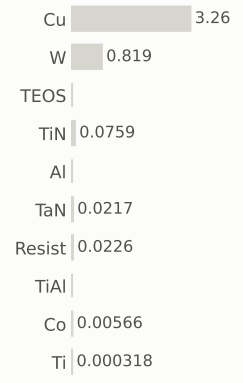

gases emitted (g)

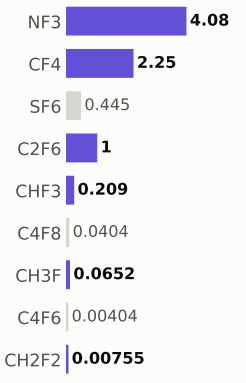

Step #15610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	524.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

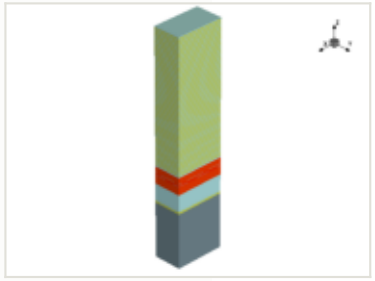

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

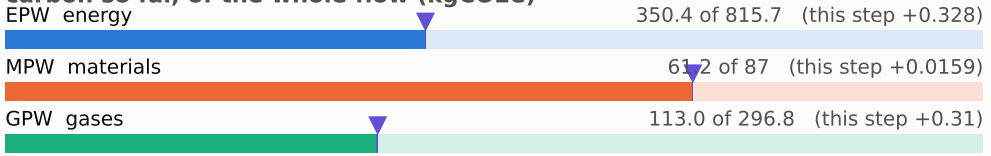

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

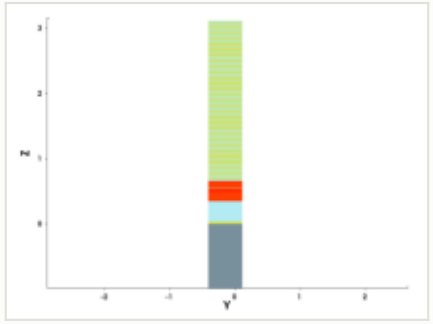

y cut at -0.150 µm

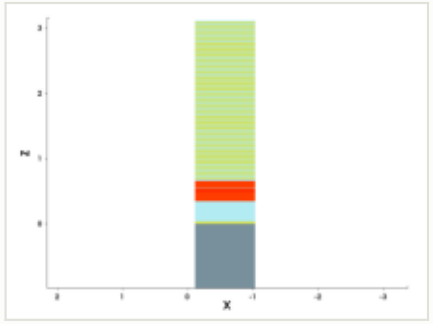

mask for this step

no mask for this step

steps by process area

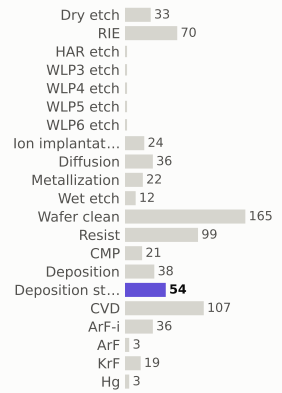

materials deposited (g)

gases emitted (g)

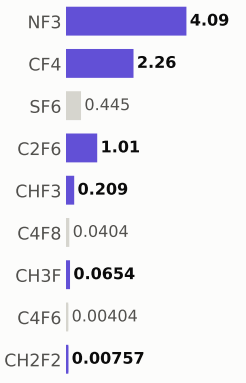

Step #15620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	525.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

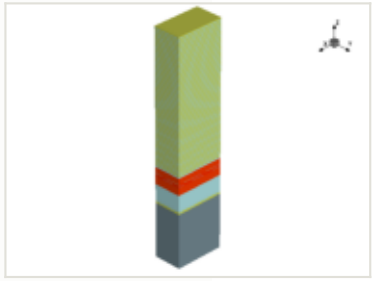

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

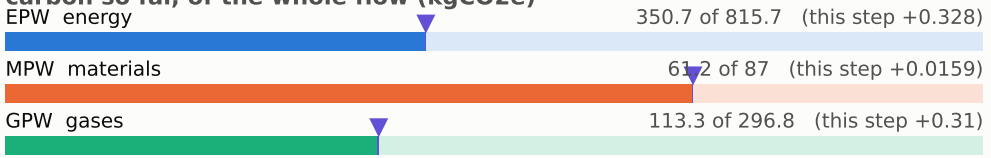

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

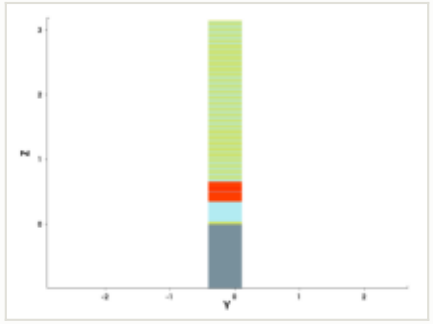

y cut at -0.150 µm

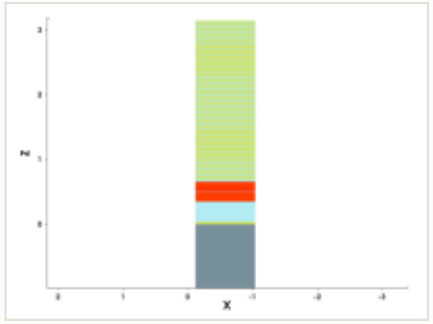

mask for this step

no mask for this step

steps by process area

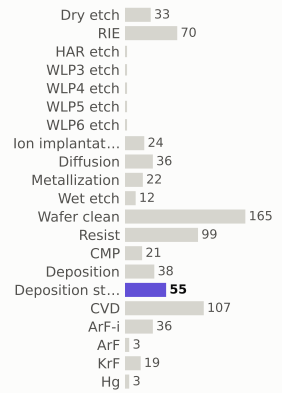

materials deposited (g)

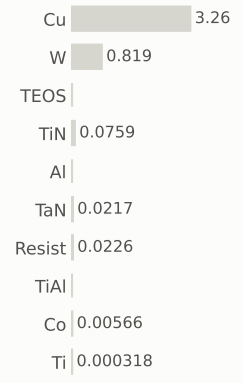

gases emitted (g)

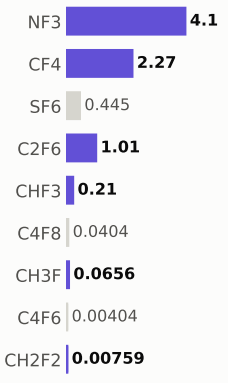

Step #15630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	525.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

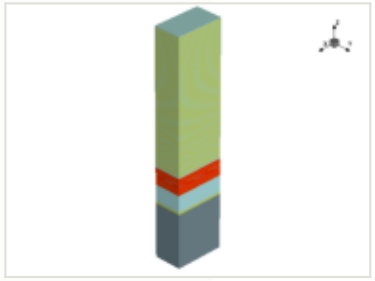

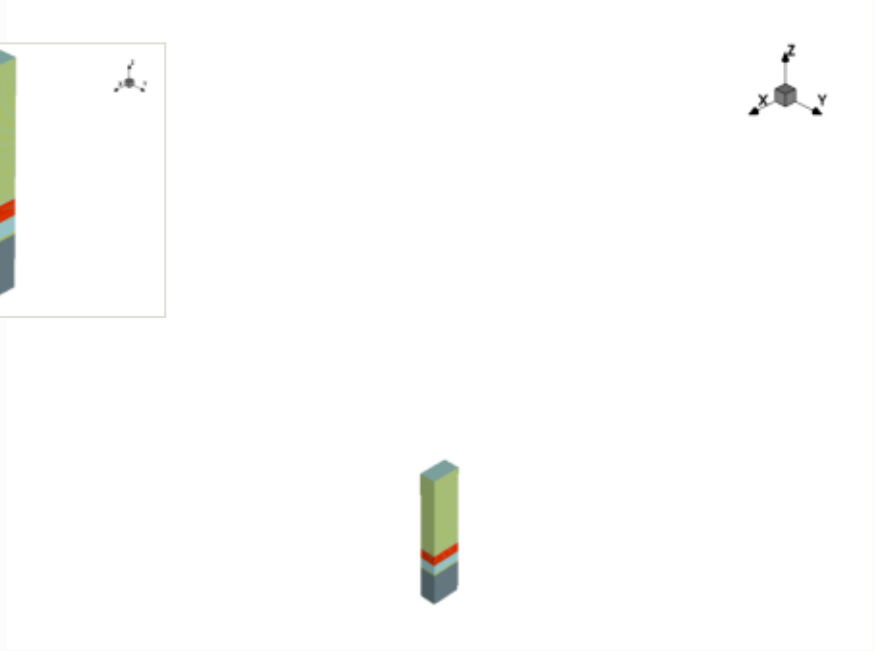

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

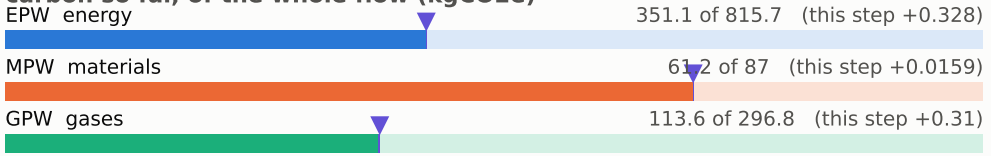

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

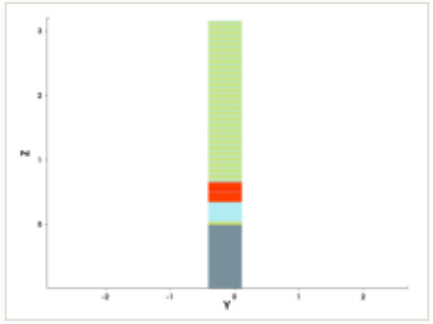

y cut at -0.150 µm

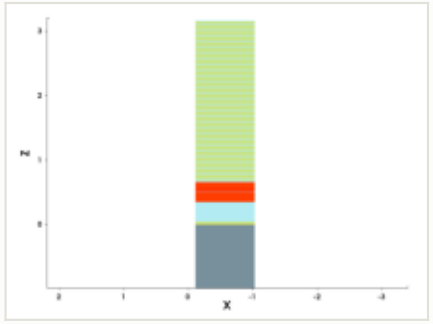

mask for this step

no mask for this step

steps by process area

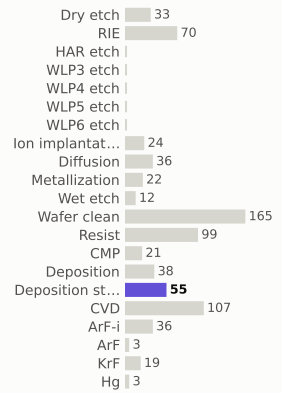

materials deposited (g)

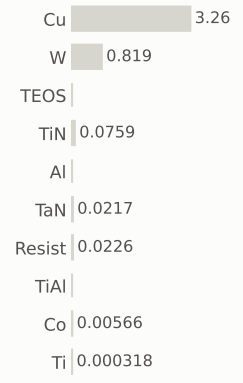

gases emitted (g)

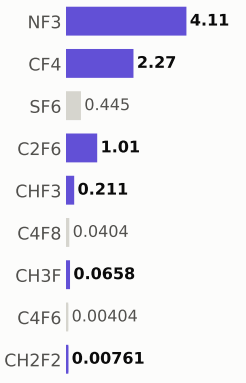

Step #15640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	526.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

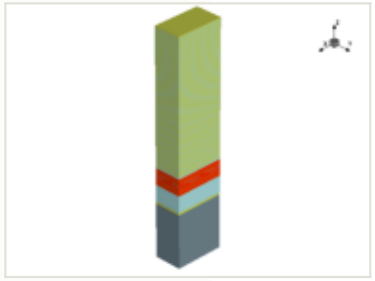

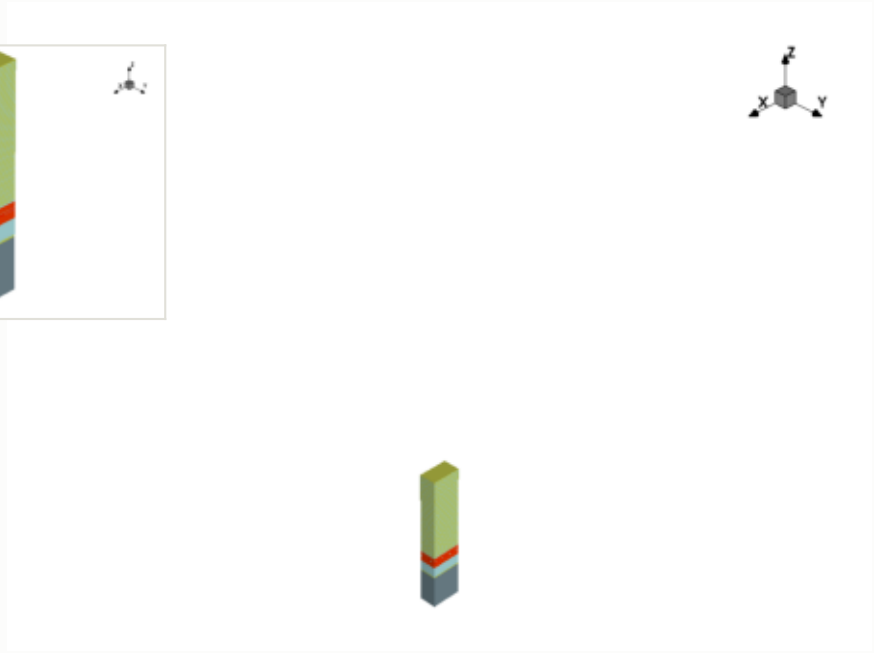

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

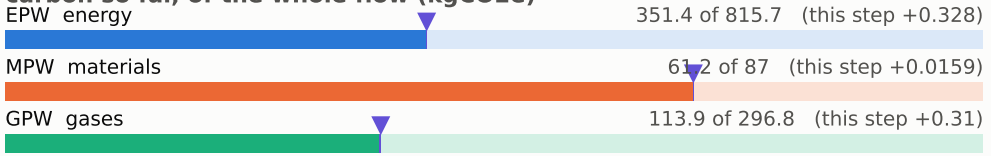

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

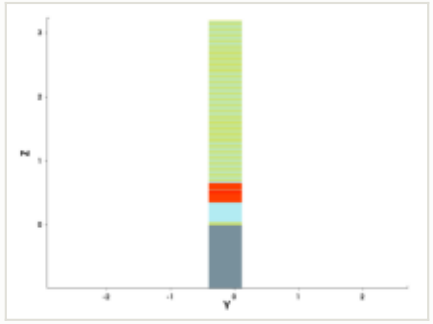

y cut at -0.150 µm

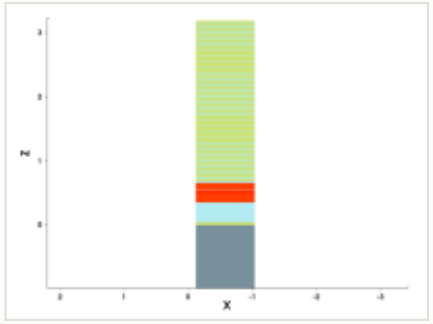

mask for this step

no mask for this step

steps by process area

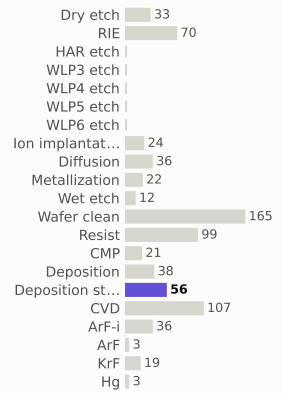

materials deposited (g)

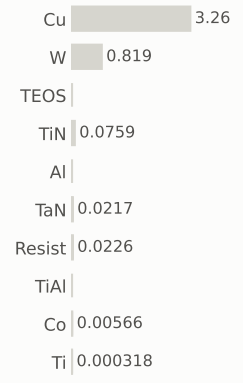

gases emitted (g)

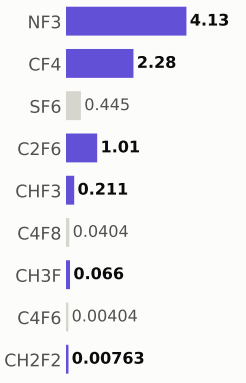

Step #15650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	527.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

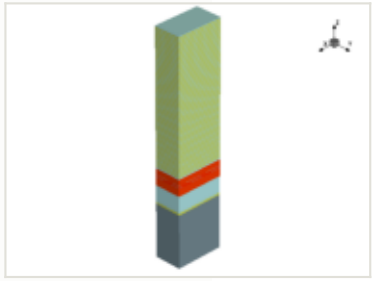

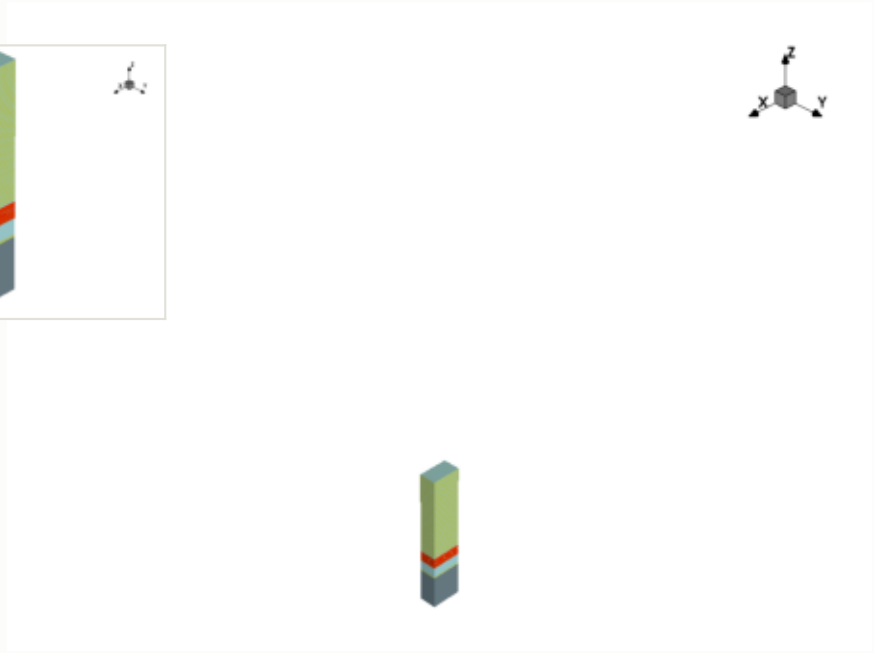

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

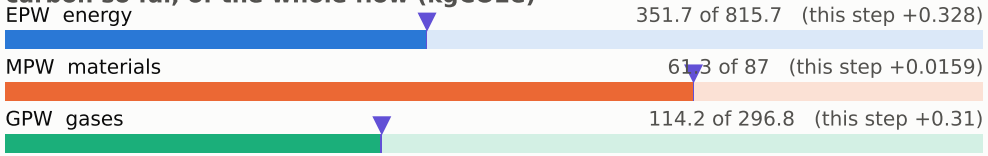

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

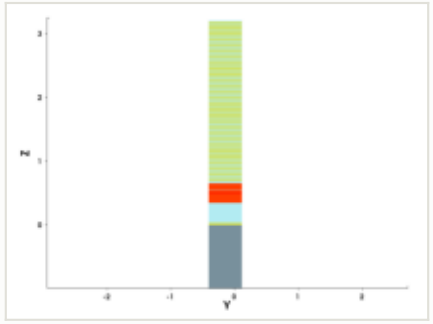

y cut at -0.150 µm

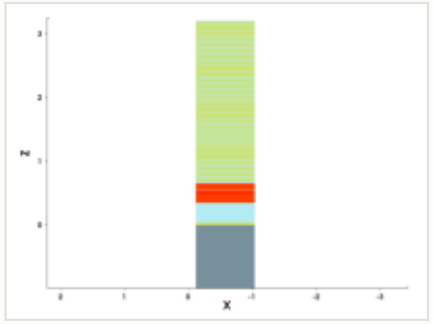

mask for this step

no mask for this step

steps by process area

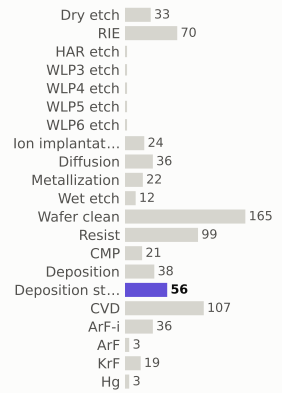

materials deposited (g)

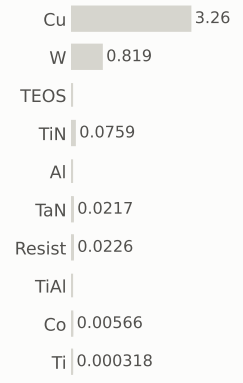

gases emitted (g)

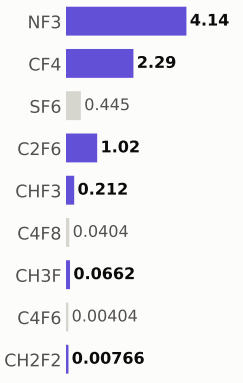

Step #15660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	527.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

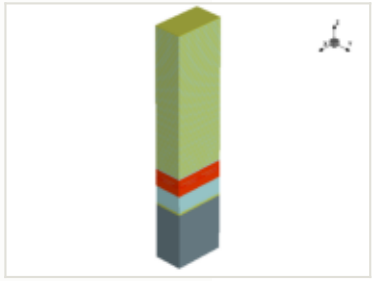

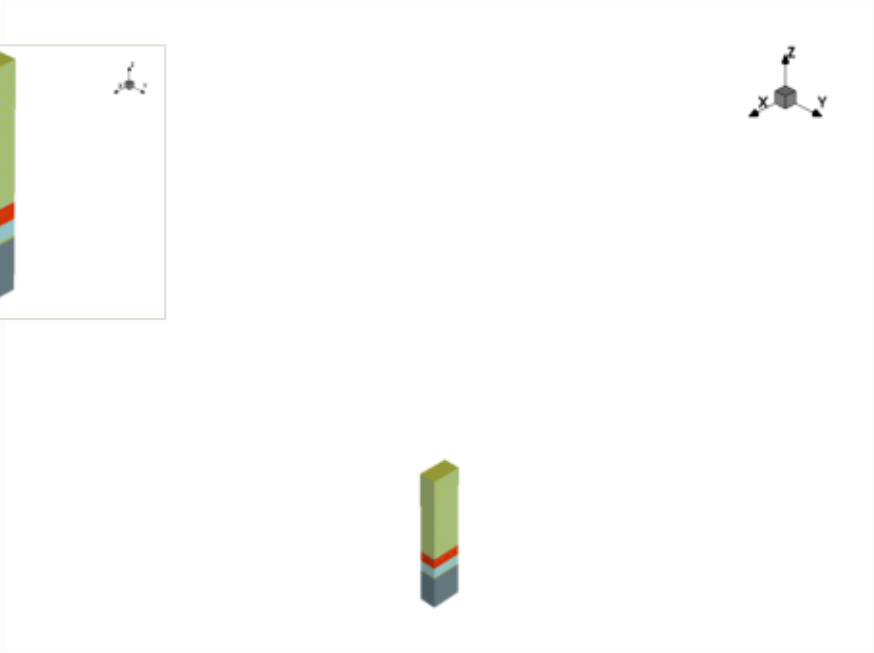

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

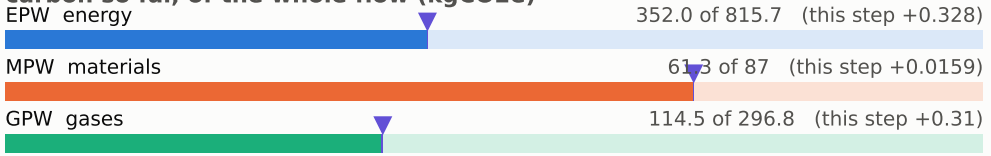

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

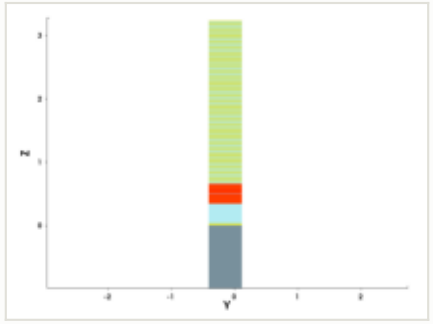

y cut at -0.150 µm

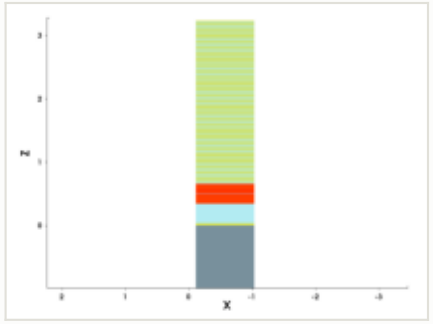

mask for this step

no mask for this step

steps by process area

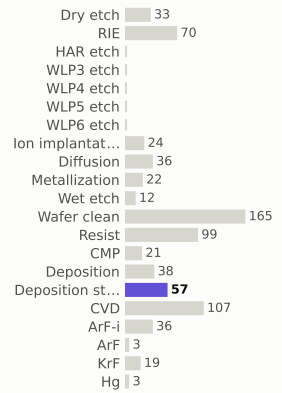

materials deposited (g)

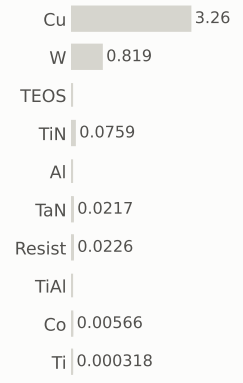

gases emitted (g)

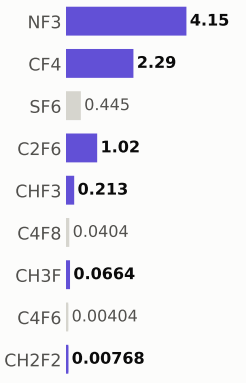

Step #15670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	528.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

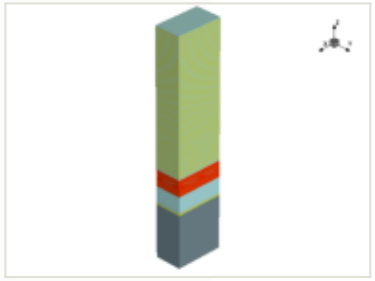

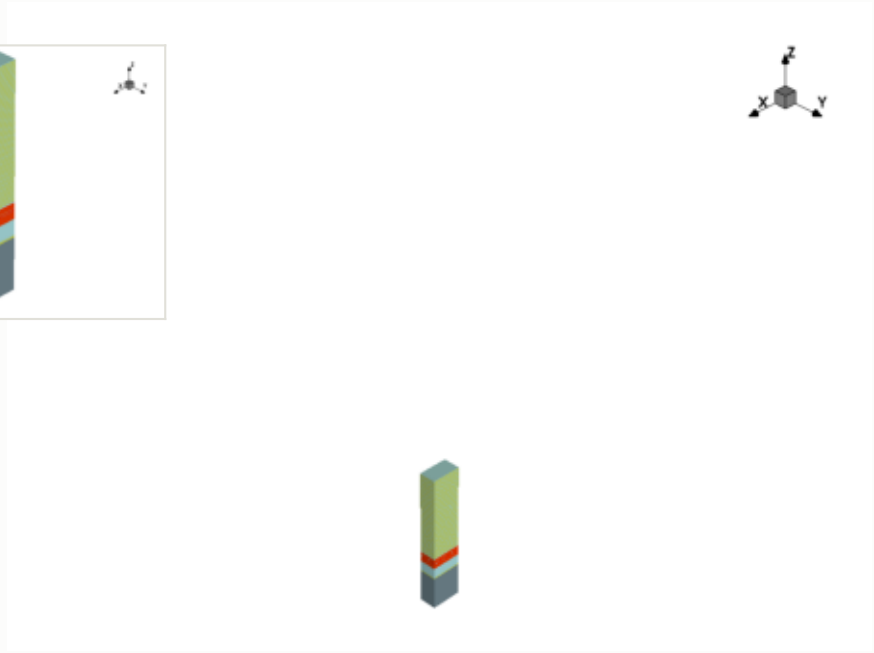

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

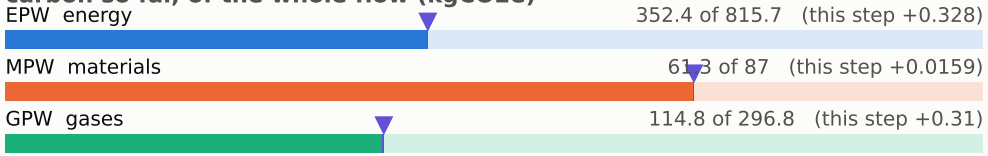

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

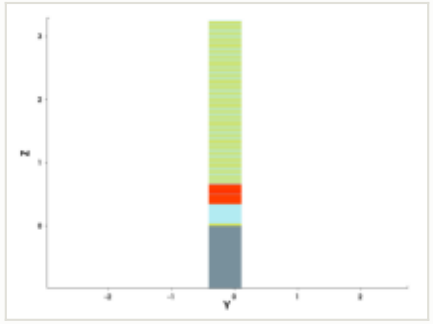

y cut at -0.150 µm

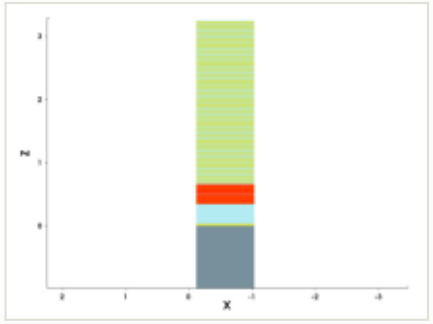

mask for this step

no mask for this step

steps by process area

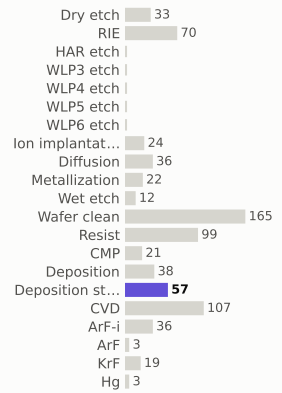

materials deposited (g)

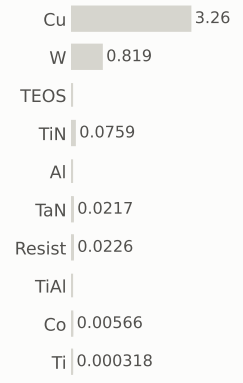

gases emitted (g)

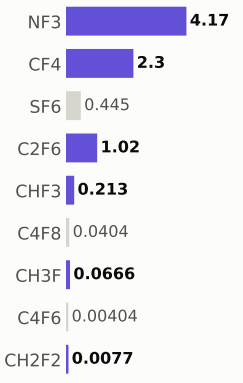

Step #15680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	529.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

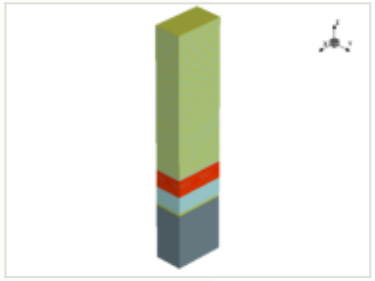

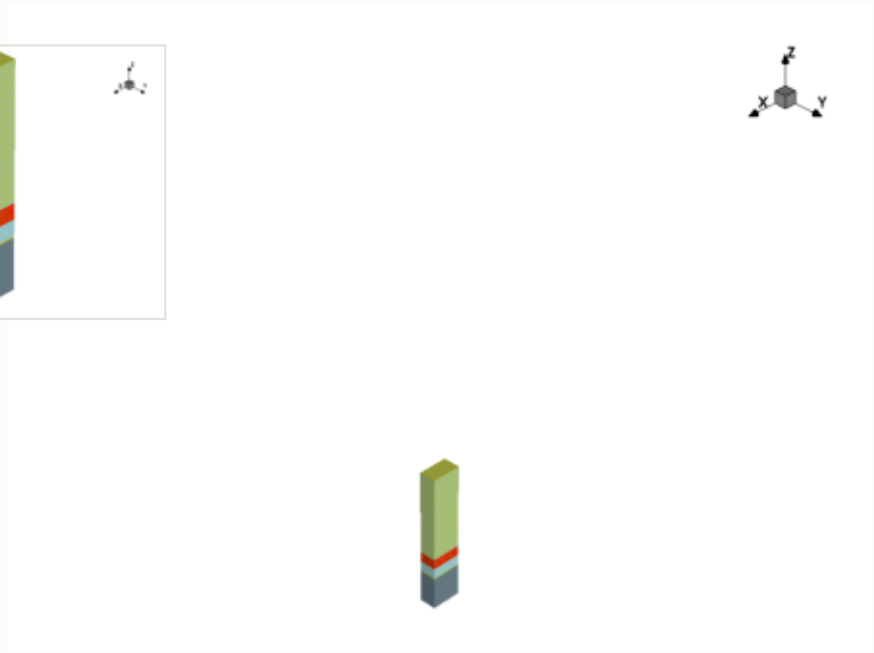

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

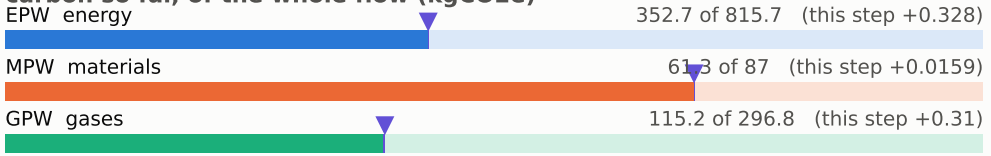

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

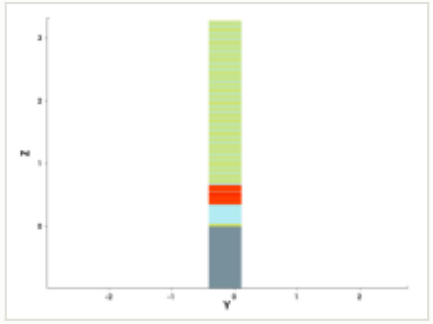

y cut at -0.150 µm

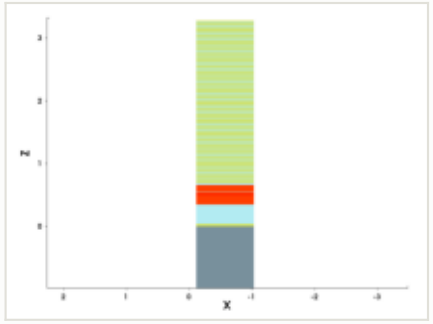

mask for this step

no mask for this step

steps by process area

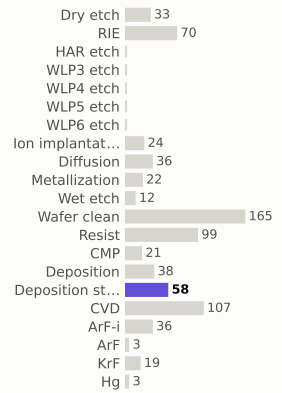

materials deposited (g)

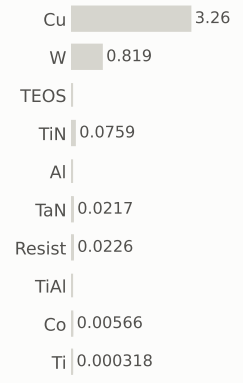

gases emitted (g)

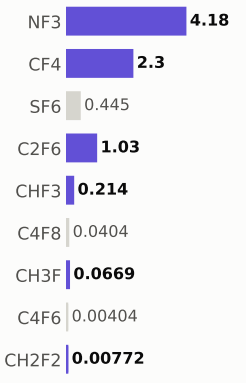

Step #15690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	529.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

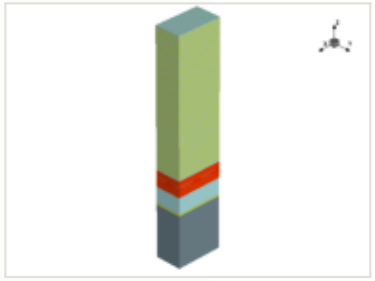

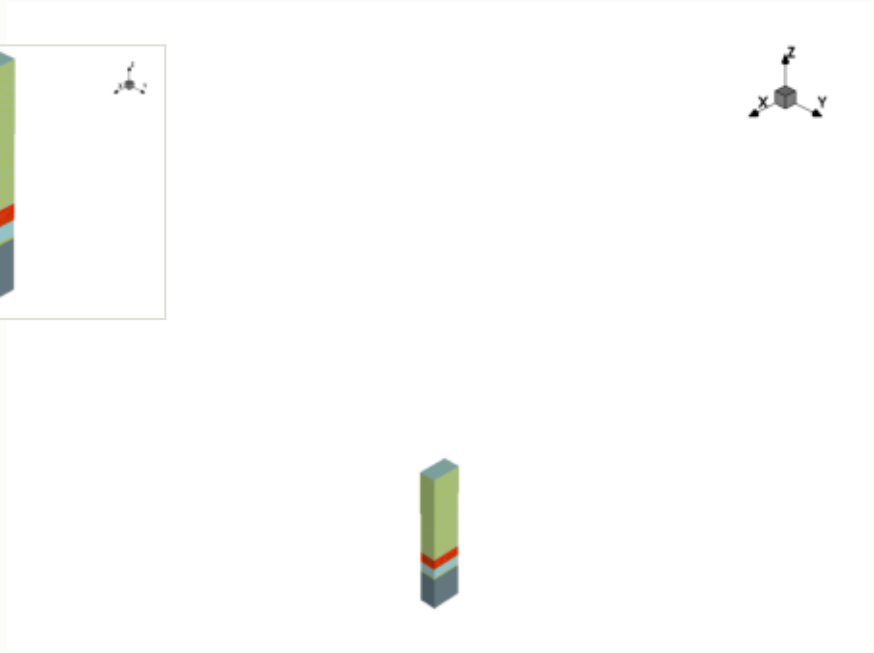

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

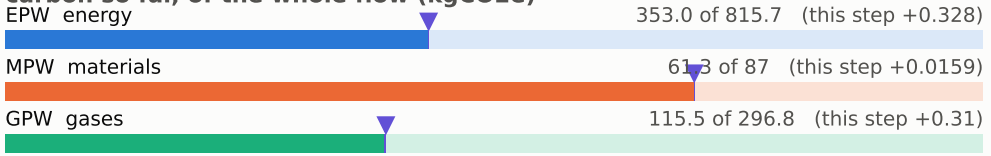

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

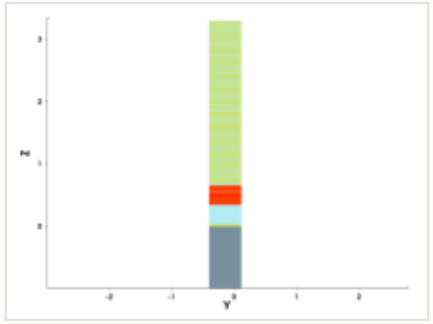

y cut at -0.150 µm

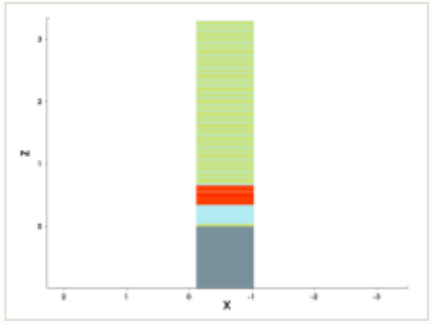

mask for this step

no mask for this step

steps by process area

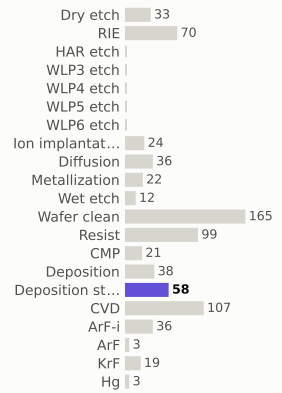

materials deposited (g)

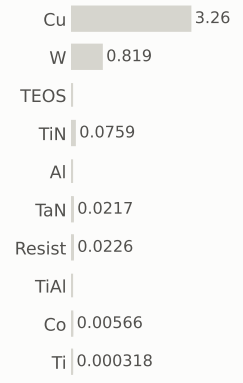

gases emitted (g)

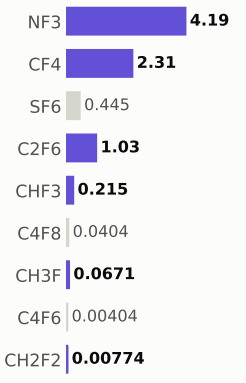

Step #15700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	530.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

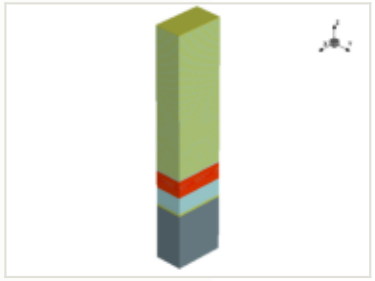

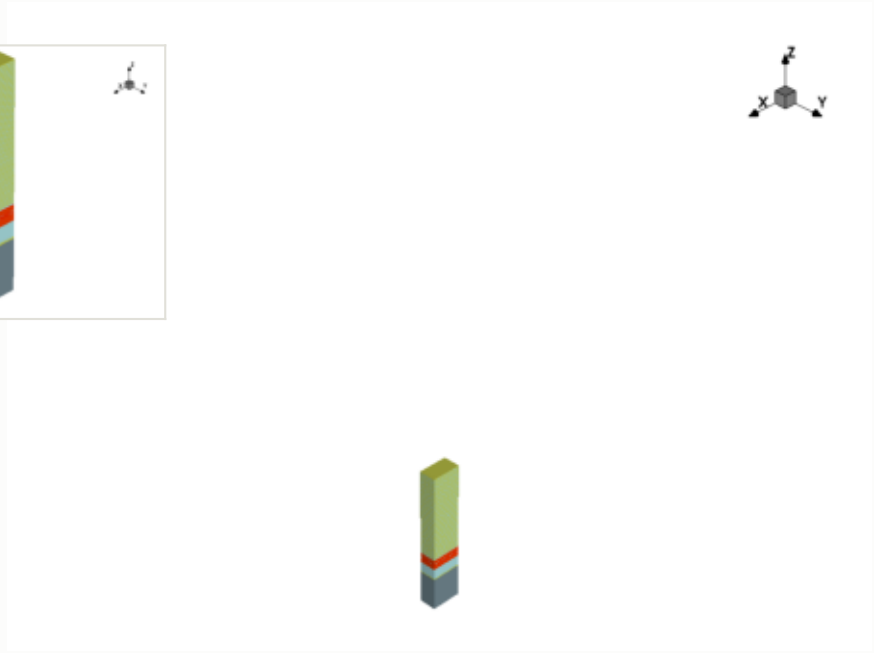

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

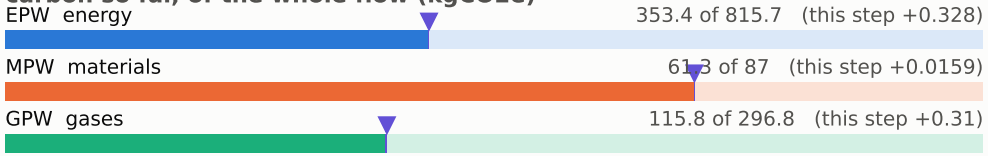

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

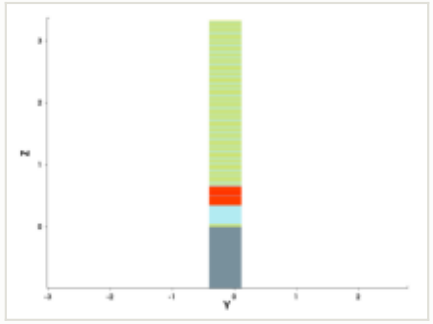

y cut at -0.150 µm

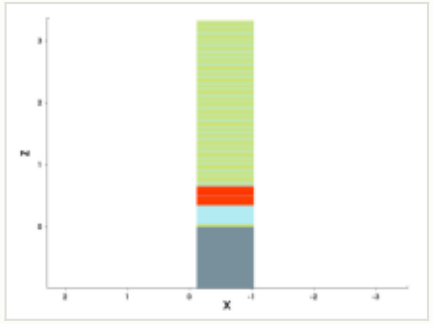

mask for this step

no mask for this step

steps by process area

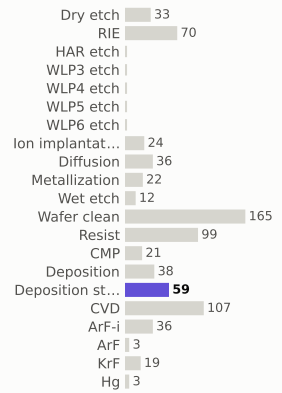

materials deposited (g)

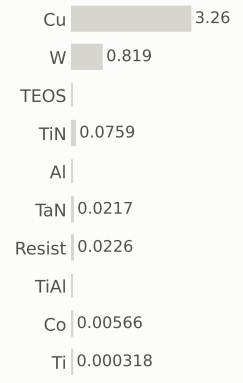

gases emitted (g)

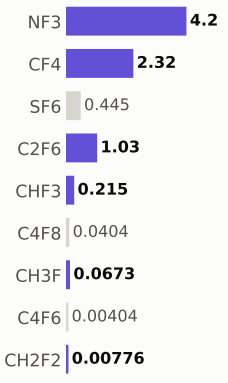

Step #15710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	531.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

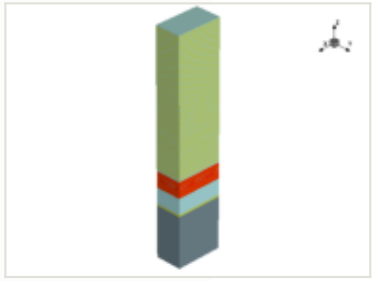

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

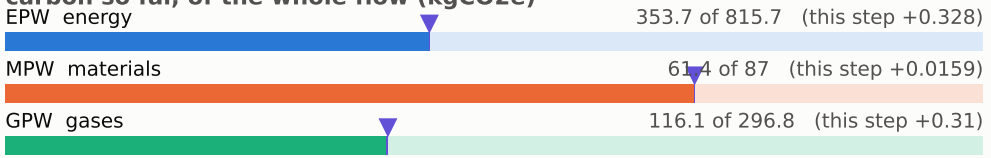

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

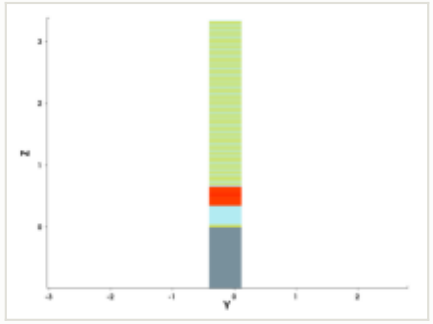

y cut at -0.150 µm

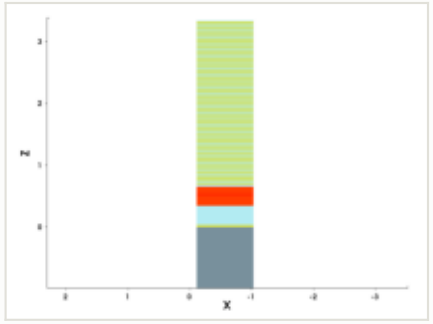

mask for this step

no mask for this step

steps by process area

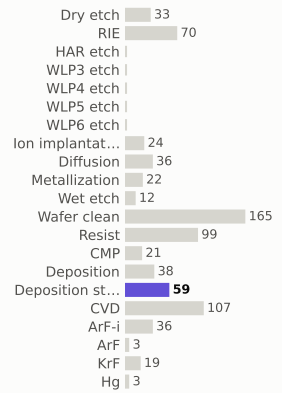

materials deposited (g)

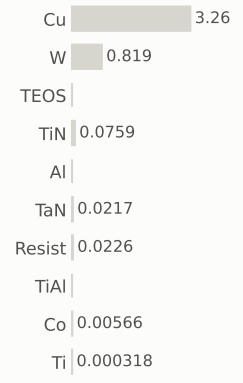

gases emitted (g)

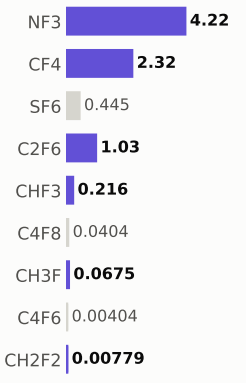

Step #15720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	531.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

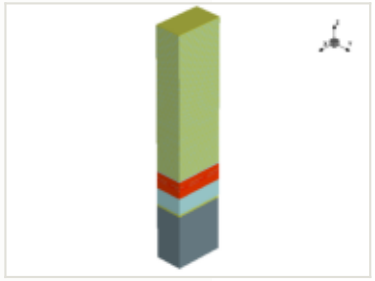

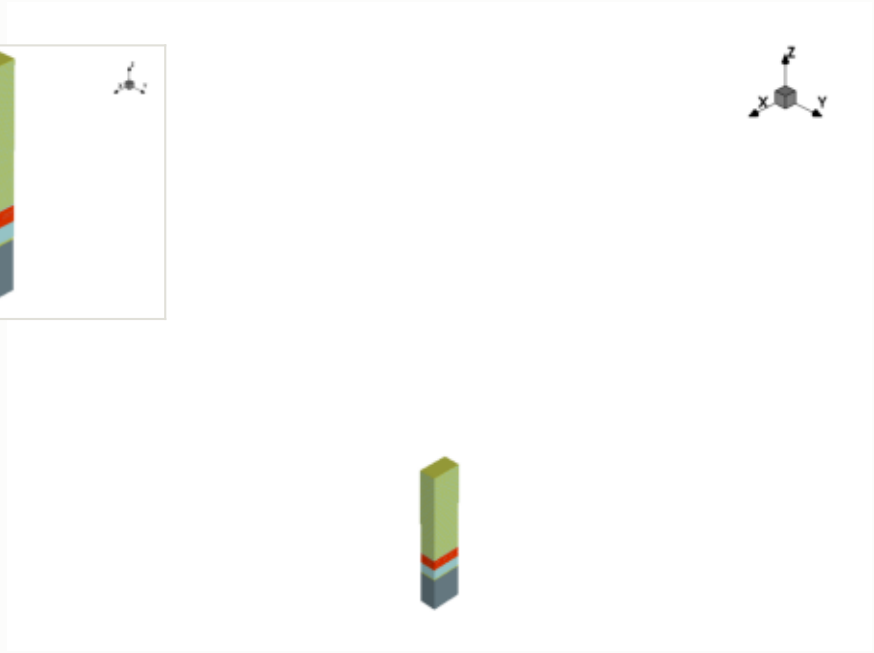

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

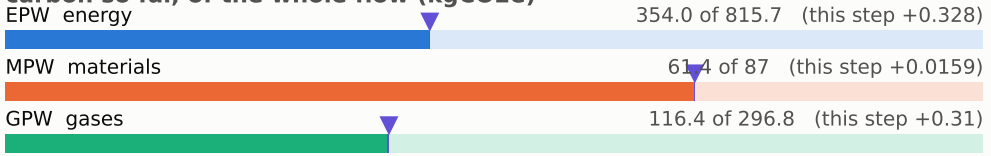

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

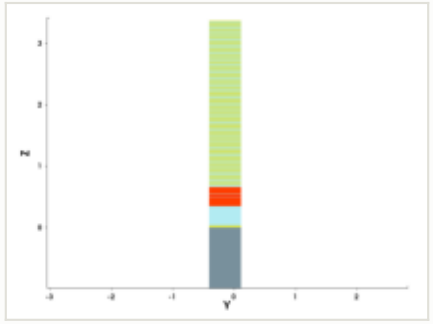

y cut at -0.150 µm

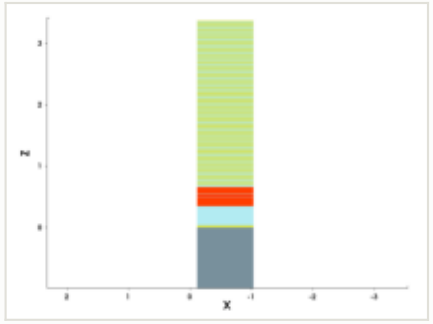

mask for this step

no mask for this step

steps by process area

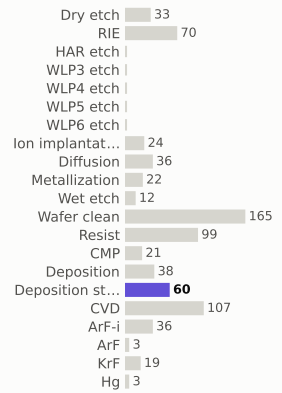

materials deposited (g)

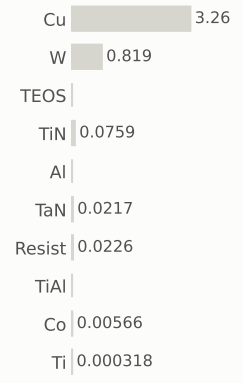

gases emitted (g)

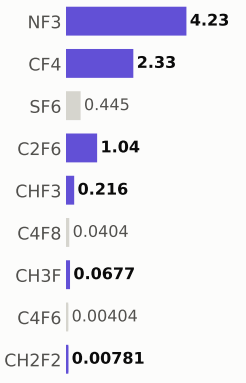

Step #15730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	532.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

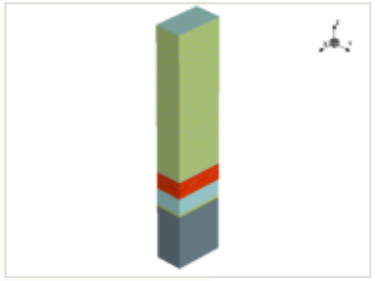

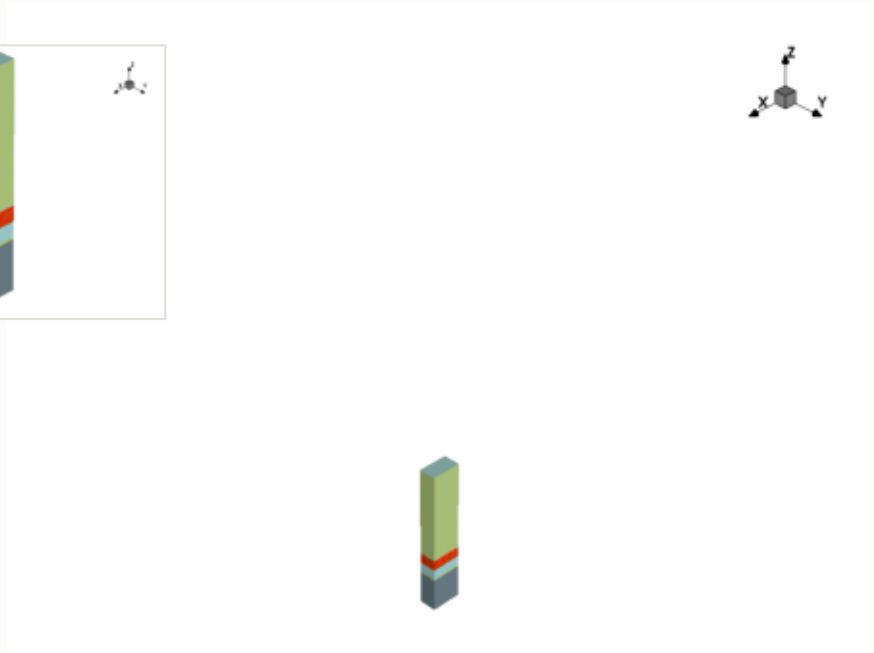

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

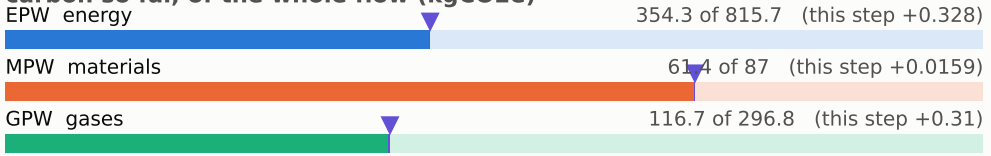

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

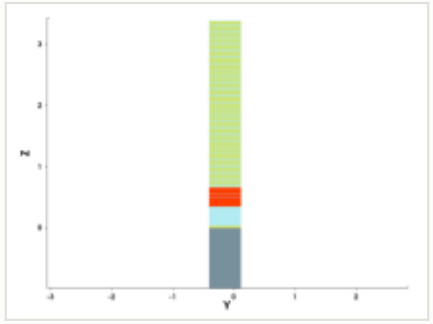

y cut at -0.150 µm

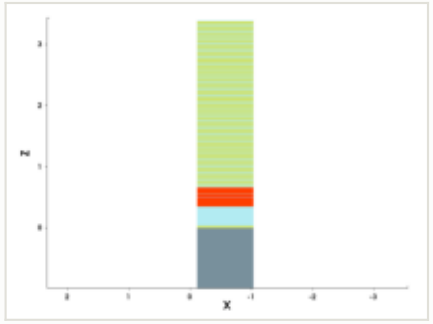

mask for this step

no mask for this step

steps by process area

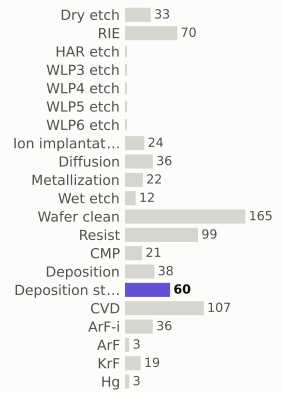

materials deposited (g)

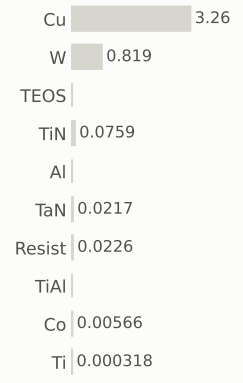

gases emitted (g)

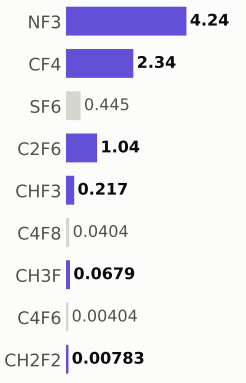

Step #15740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	533.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

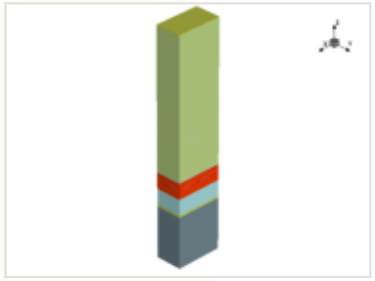

x cut at -0.570 µm

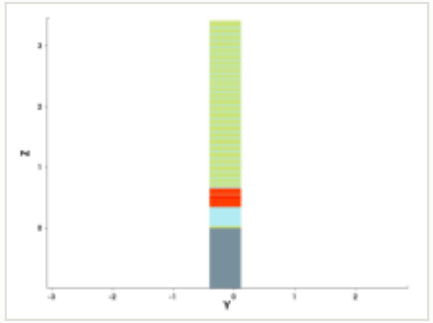

y cut at -0.150 µm

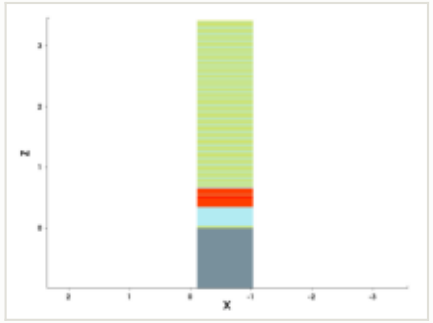

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

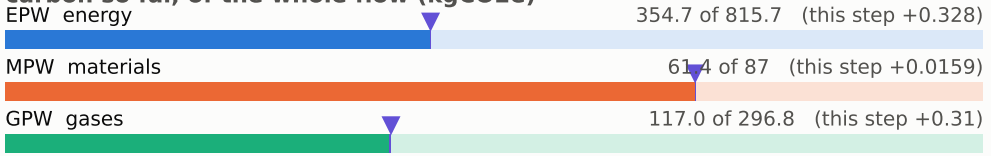

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

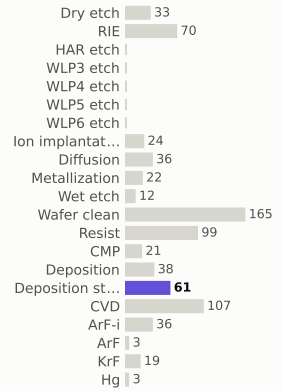

materials deposited (g)

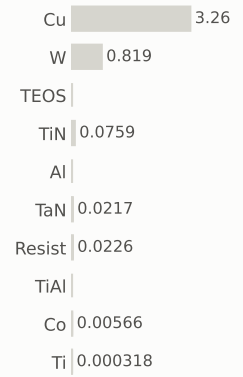

gases emitted (g)

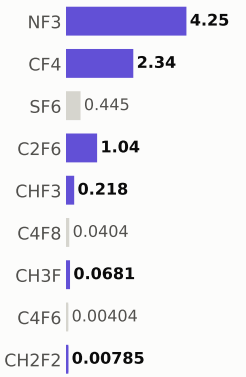

Step #15750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	533.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

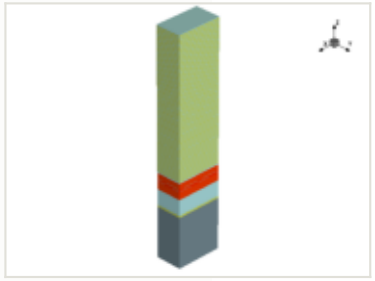

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

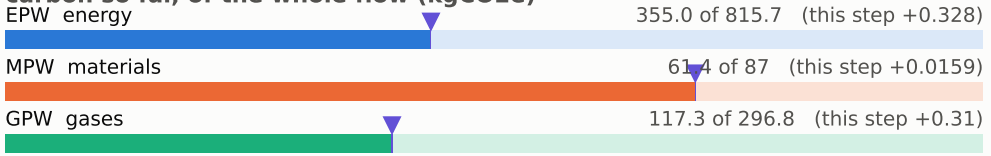

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

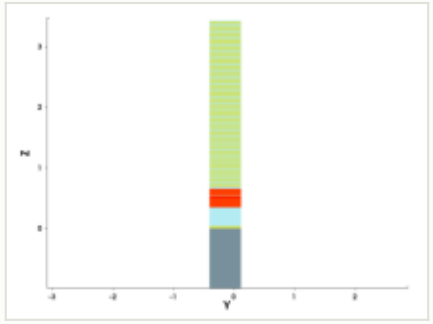

y cut at -0.150 µm

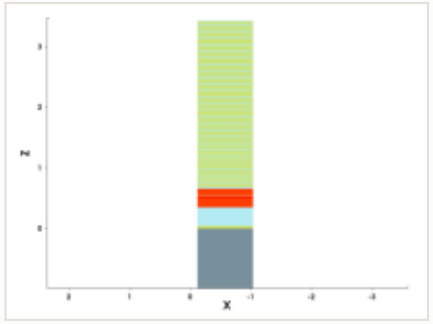

mask for this step

no mask for this step

steps by process area

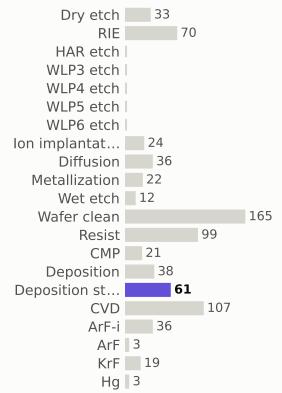

materials deposited (g)

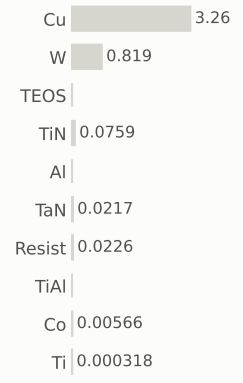

gases emitted (g)

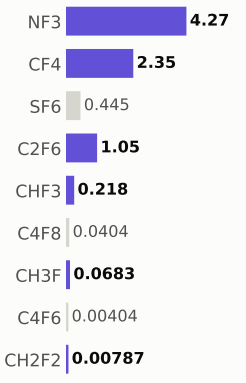

Step #15760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	534.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

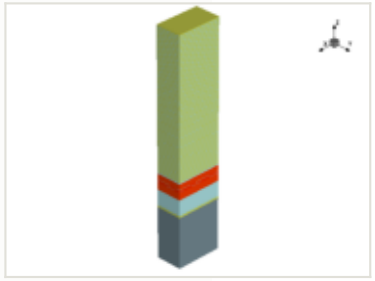

x cut at -0.570 µm

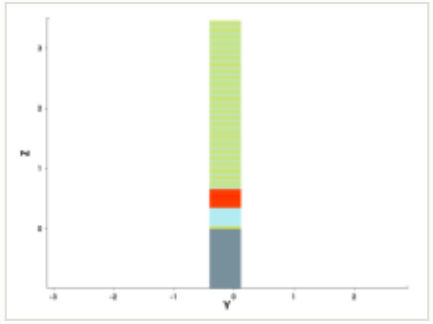

y cut at -0.150 µm

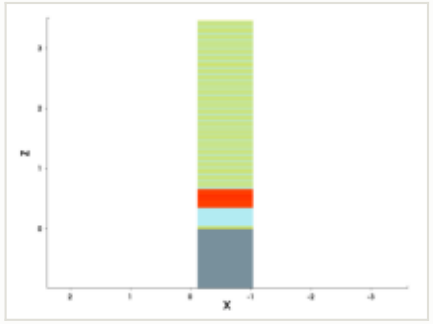

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

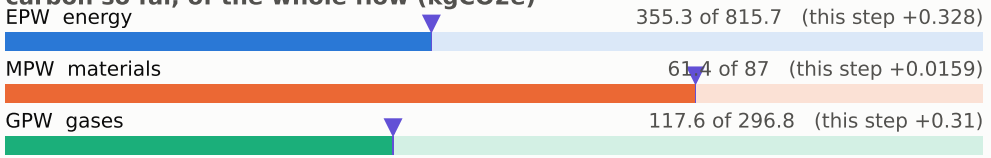

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

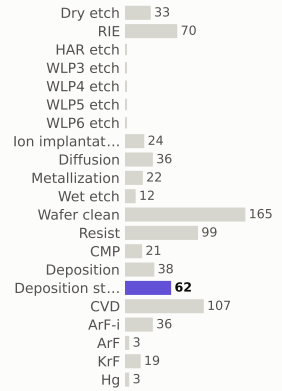

materials deposited (g)

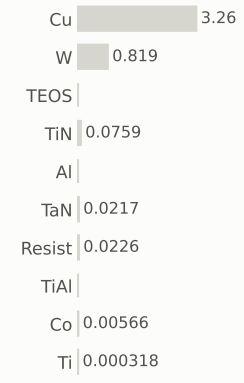

gases emitted (g)

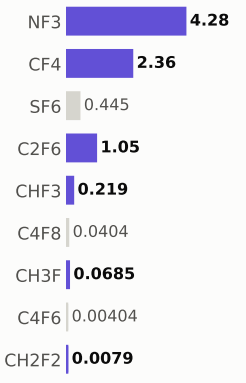

Step #15770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	535.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

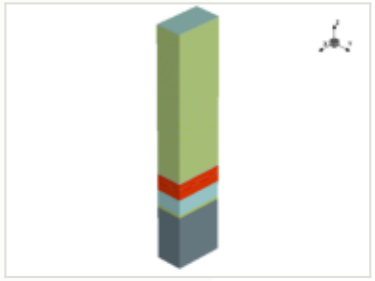

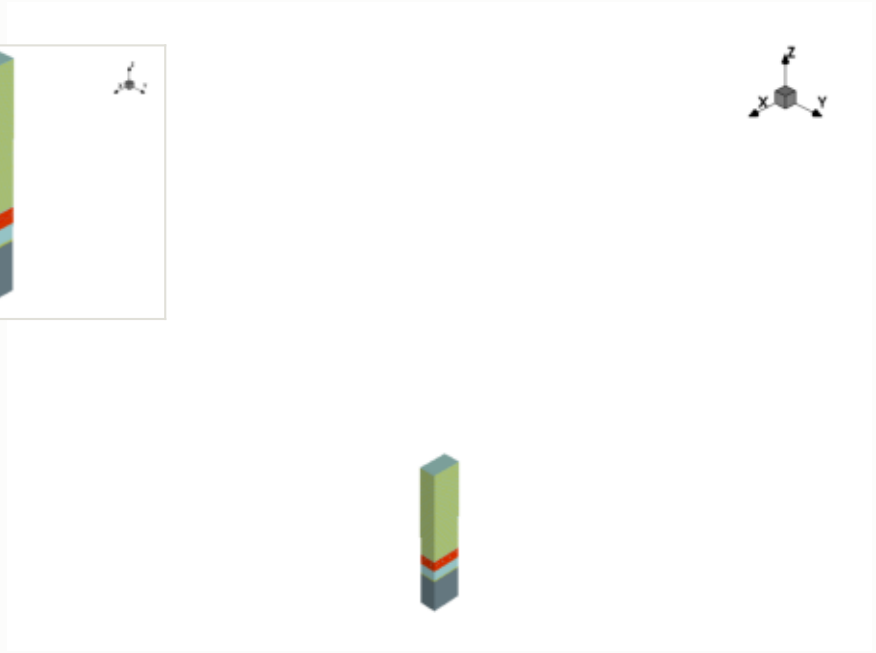

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

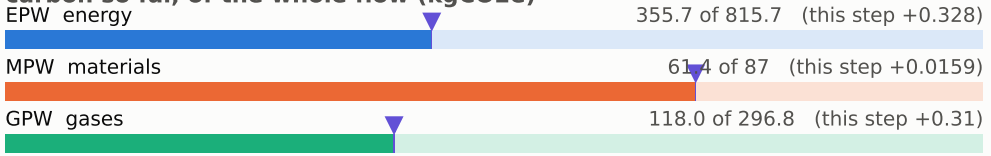

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

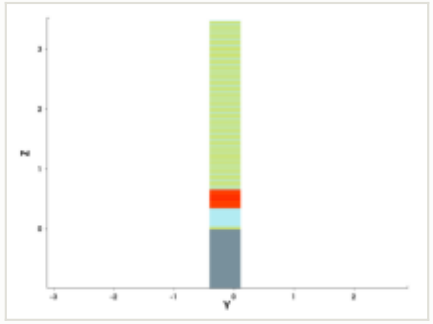

y cut at -0.150 µm

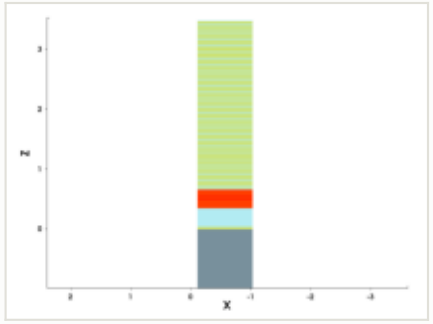

mask for this step

no mask for this step

steps by process area

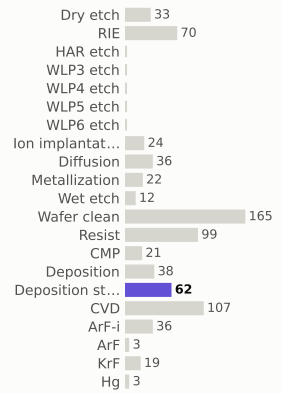

materials deposited (g)

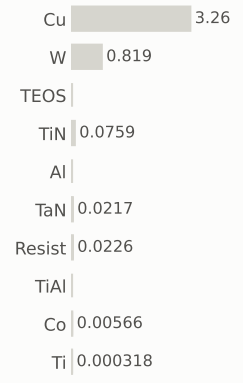

gases emitted (g)

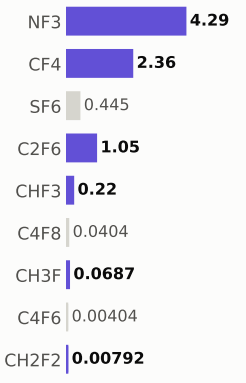

Step #15780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	535.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

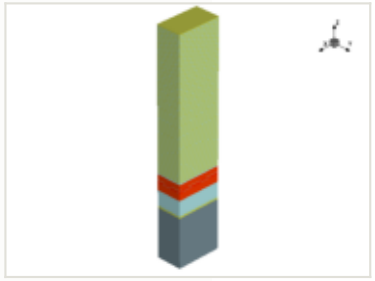

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

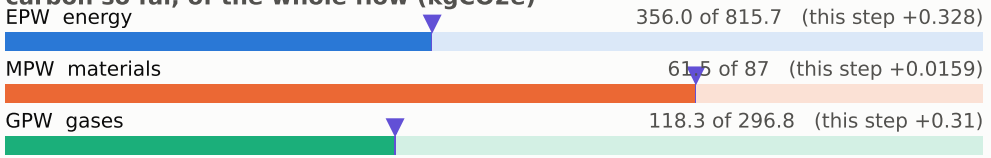

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

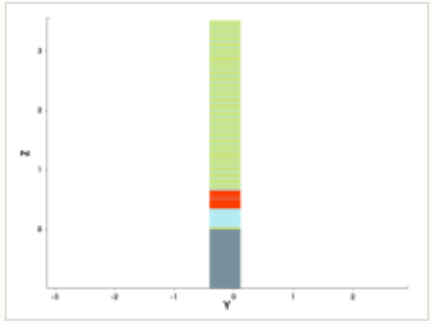

y cut at -0.150 µm

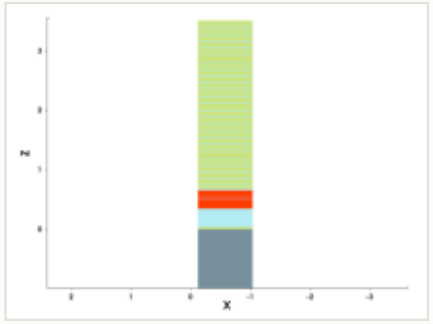

mask for this step

no mask for this step

steps by process area

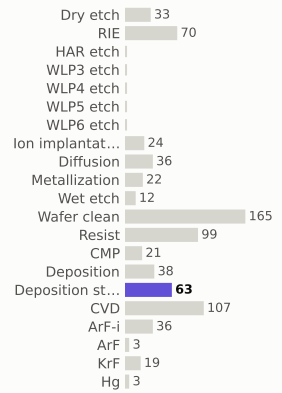

materials deposited (g)

gases emitted (g)

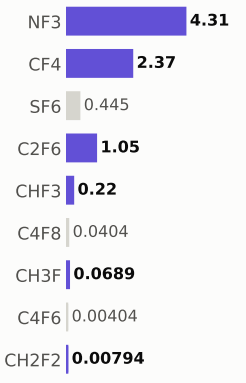

Step #15790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	536.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

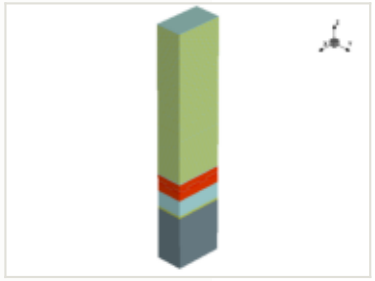

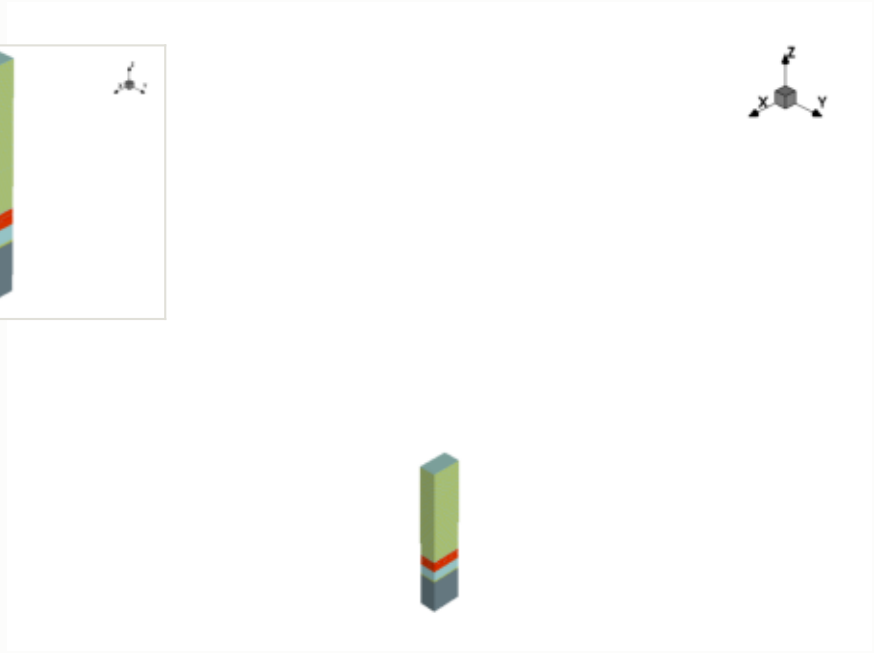

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

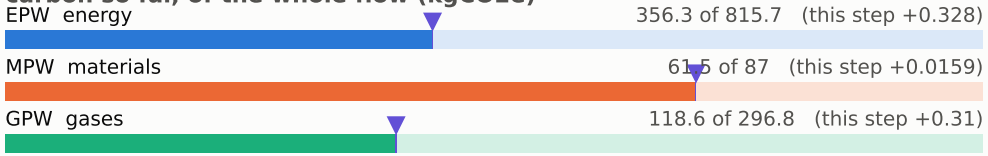

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

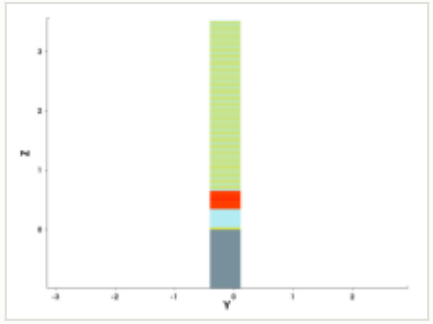

y cut at -0.150 µm

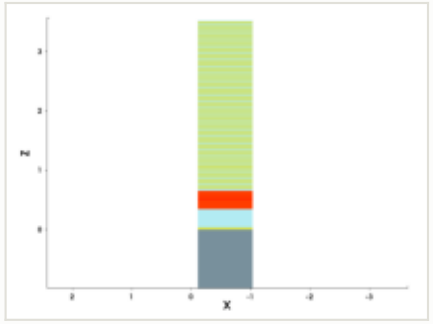

mask for this step

no mask for this step

steps by process area

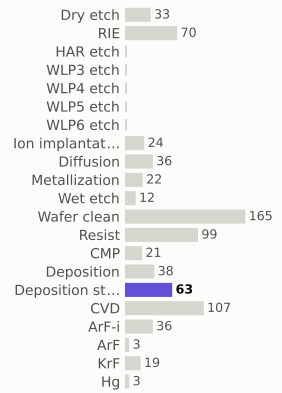

materials deposited (g)

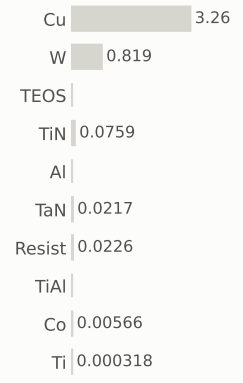

gases emitted (g)

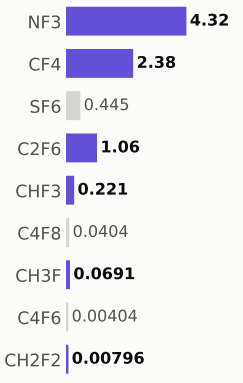

Step #15800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	537.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

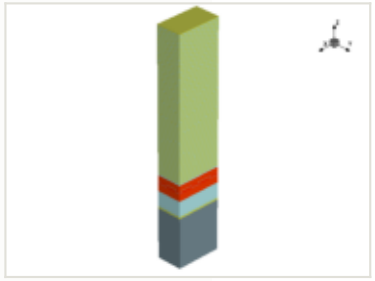

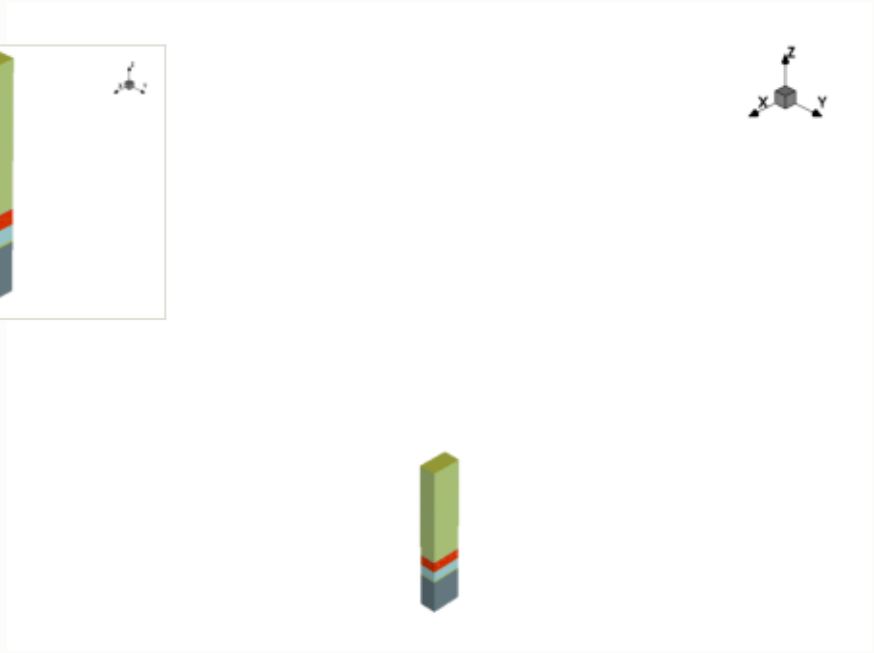

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

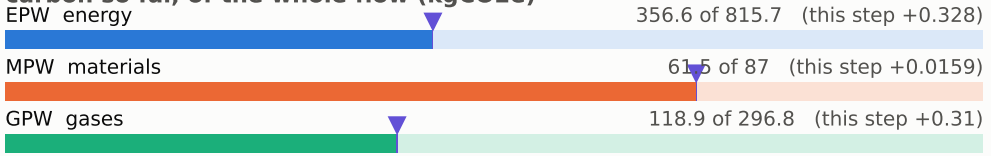

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

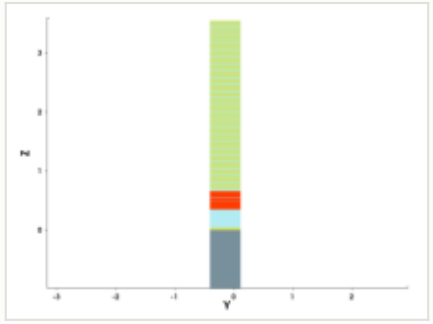

y cut at -0.150 µm

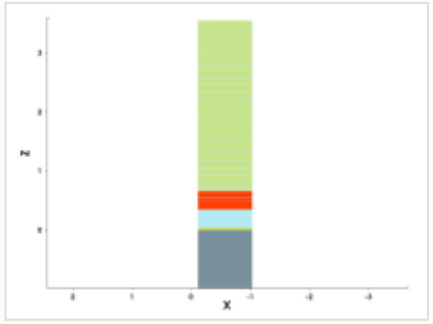

mask for this step

no mask for this step

steps by process area

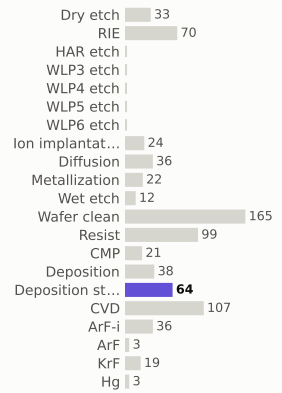

materials deposited (g)

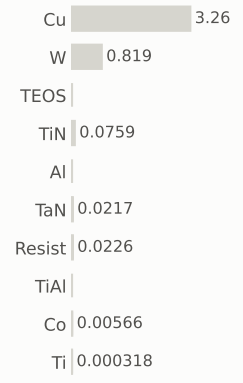

gases emitted (g)

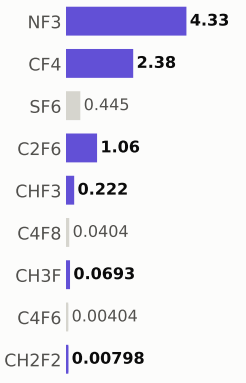

Step #15810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	537.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

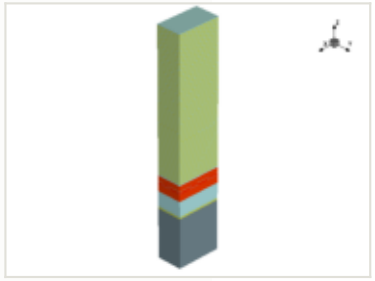

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

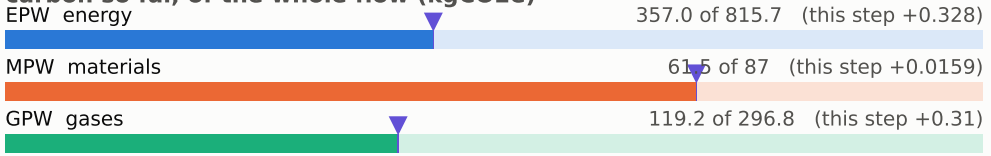

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

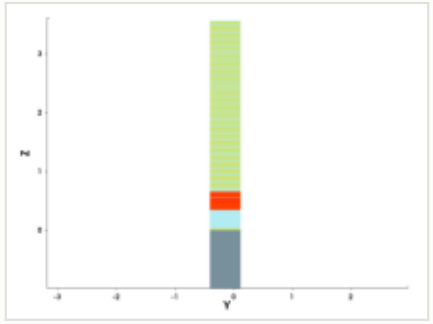

y cut at -0.150 µm

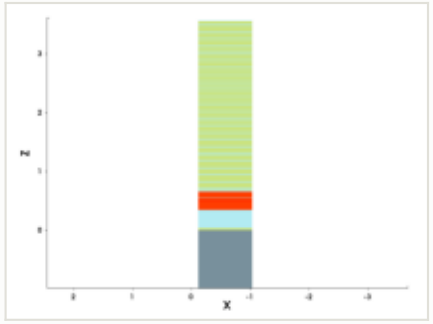

mask for this step

no mask for this step

steps by process area

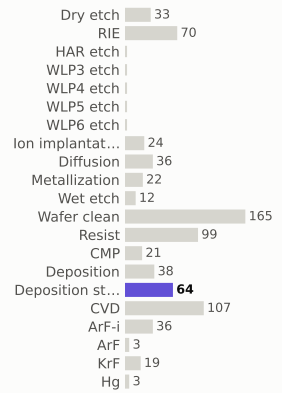

materials deposited (g)

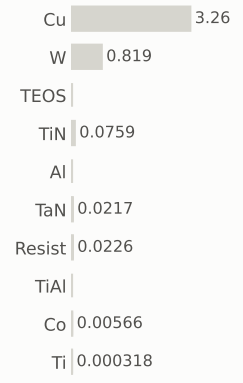

gases emitted (g)

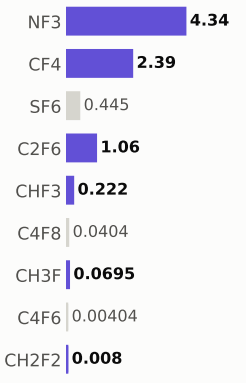

Step #15820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	538.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

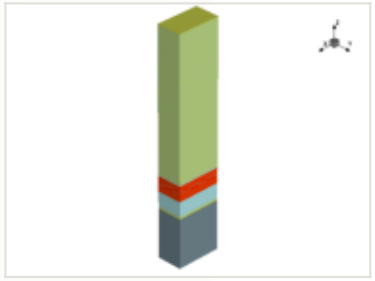

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

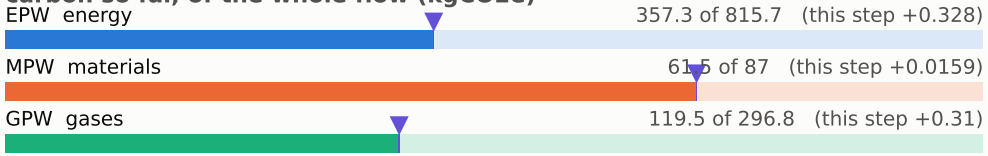

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

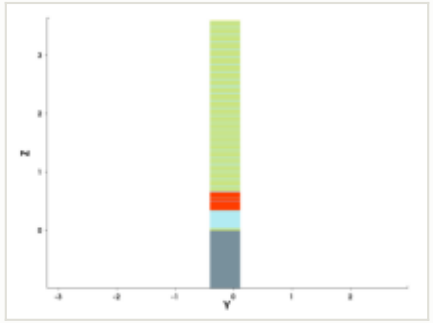

y cut at -0.150 µm

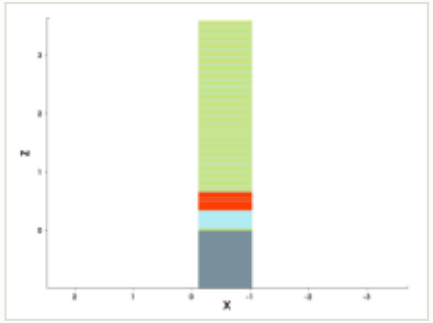

mask for this step

no mask for this step

steps by process area

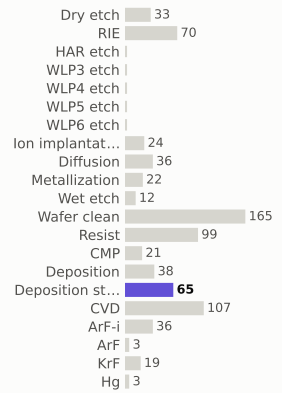

materials deposited (g)

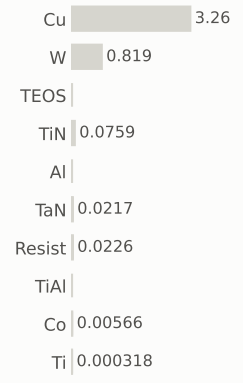

gases emitted (g)

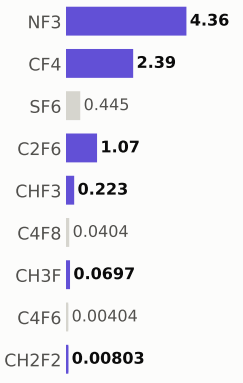

Step #15830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	539.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

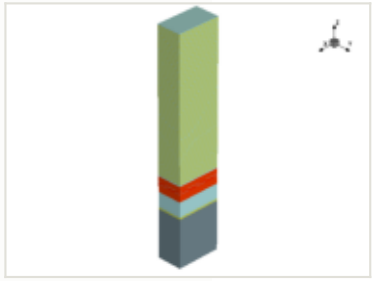

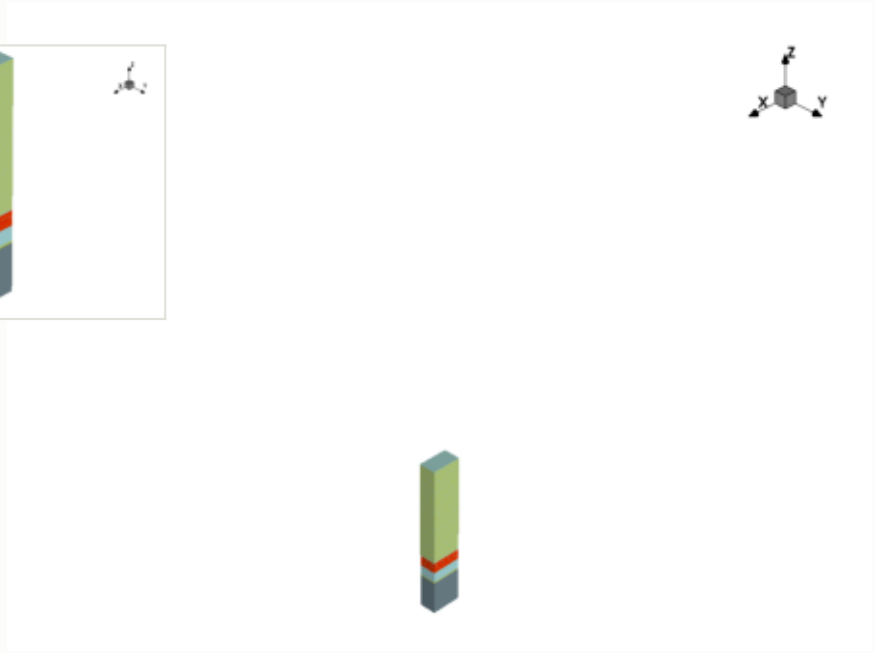

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

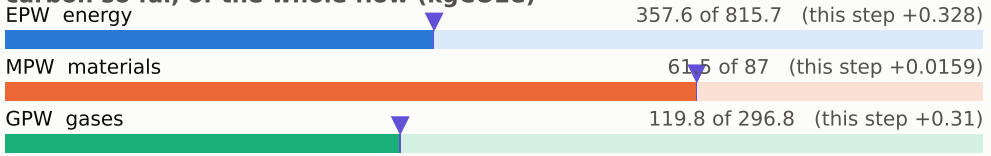

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

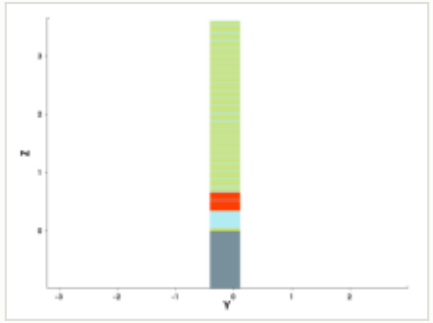

y cut at -0.150 µm

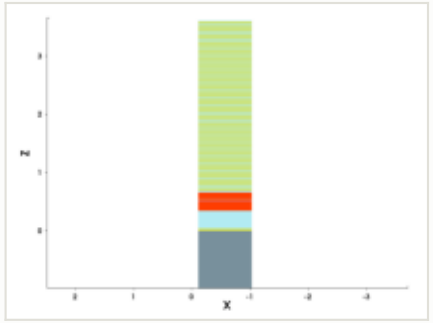

mask for this step

no mask for this step

steps by process area

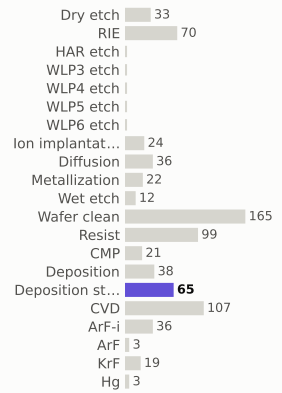

materials deposited (g)

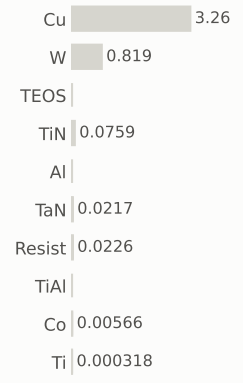

gases emitted (g)

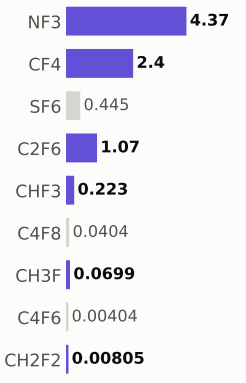

Step #15840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	539.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

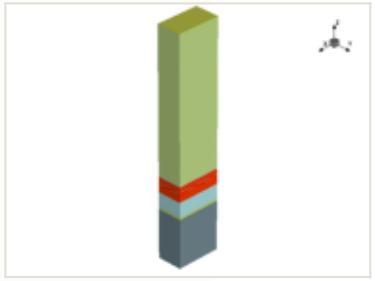

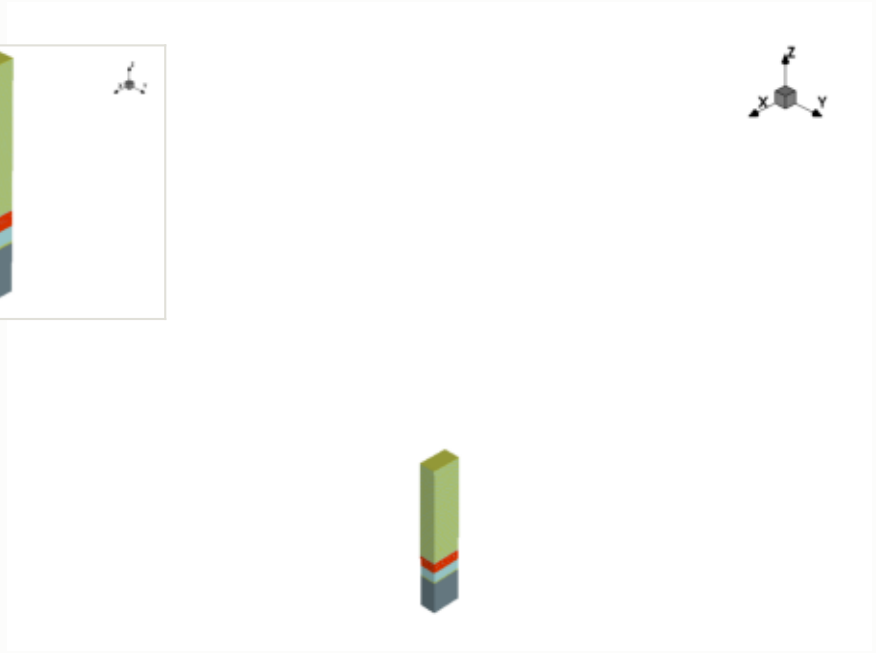

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

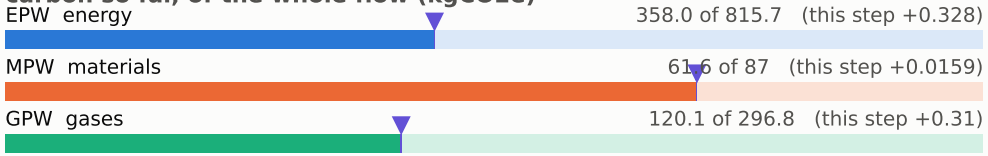

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

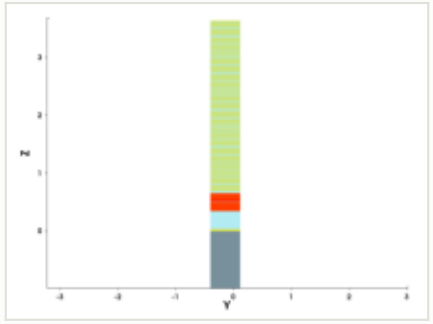

y cut at -0.150 µm

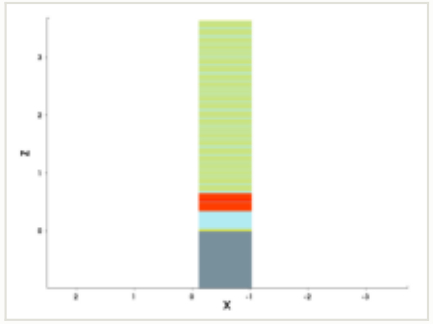

mask for this step

no mask for this step

steps by process area

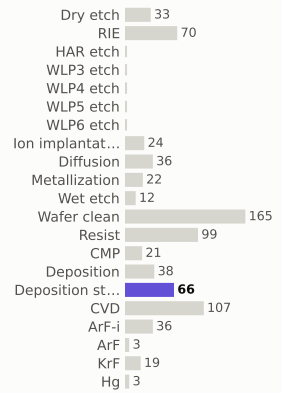

materials deposited (g)

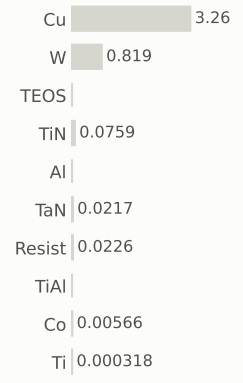

gases emitted (g)

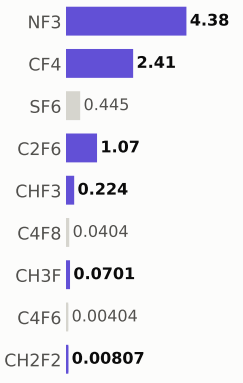

Step #15850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	540.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

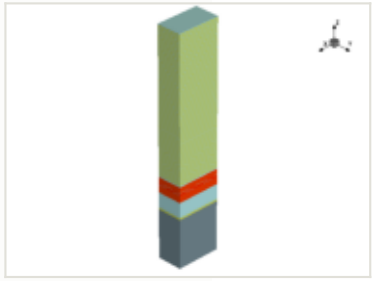

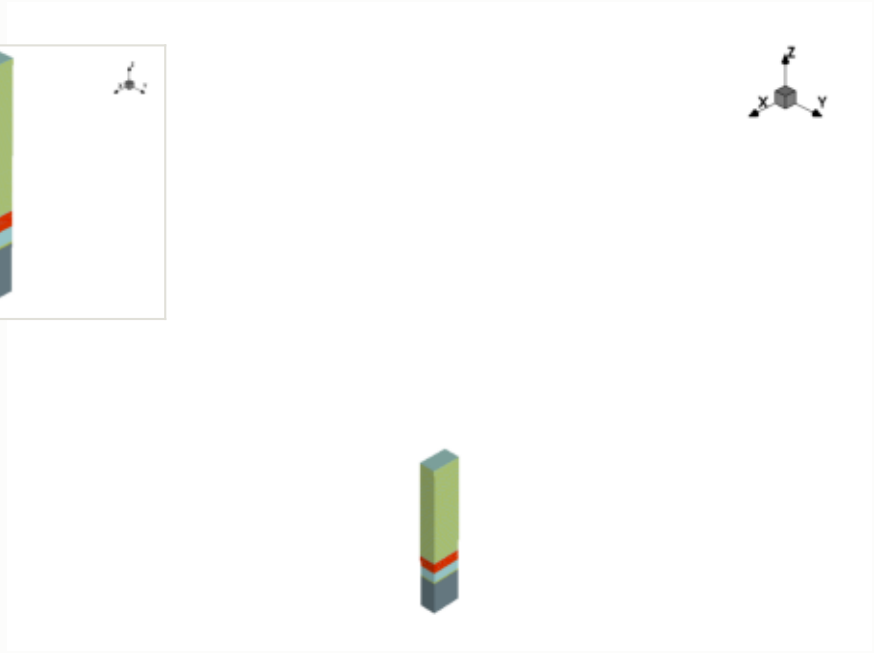

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

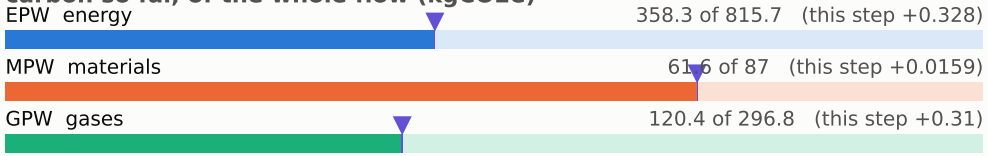

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

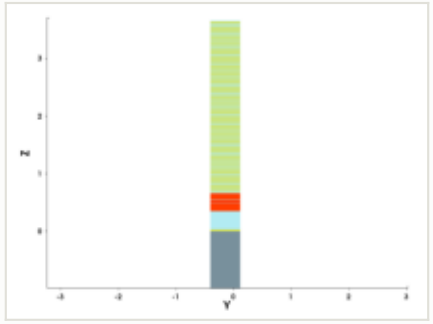

y cut at -0.150 µm

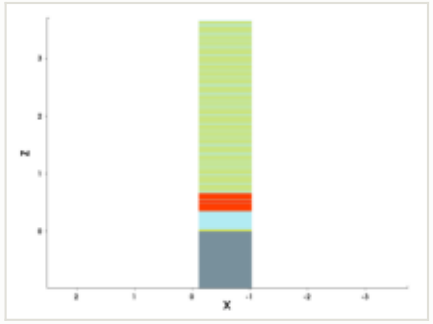

mask for this step

no mask for this step

steps by process area

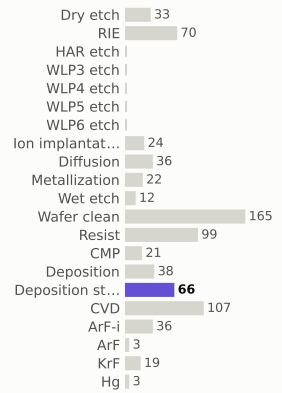

materials deposited (g)

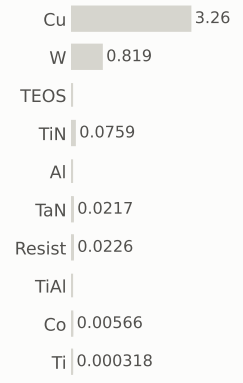

gases emitted (g)

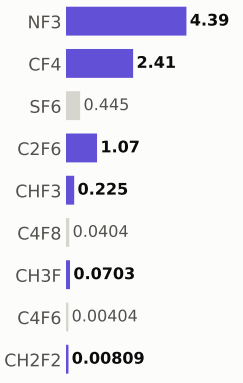

Step #15860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	540.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

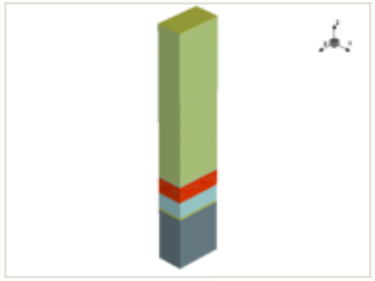

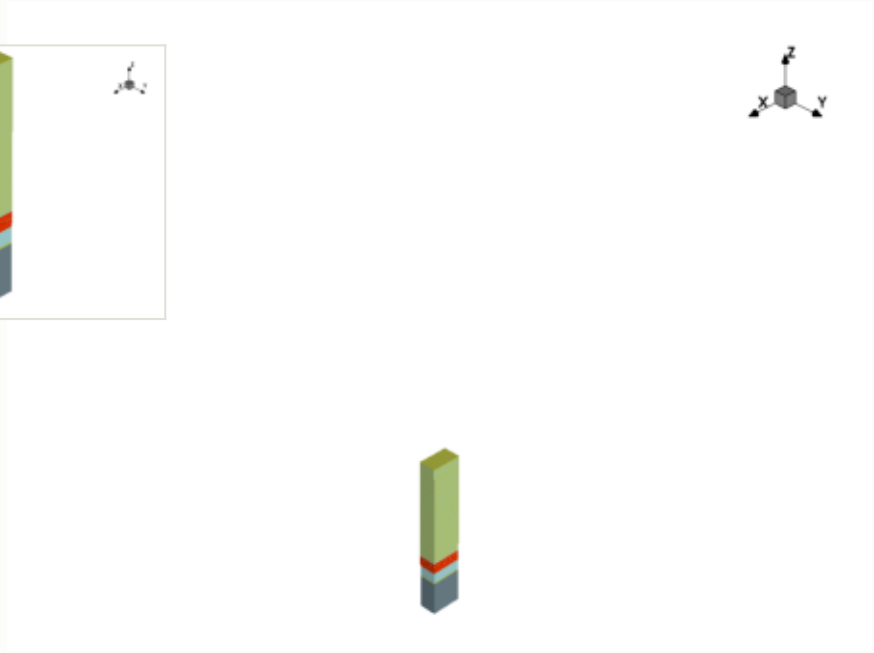

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

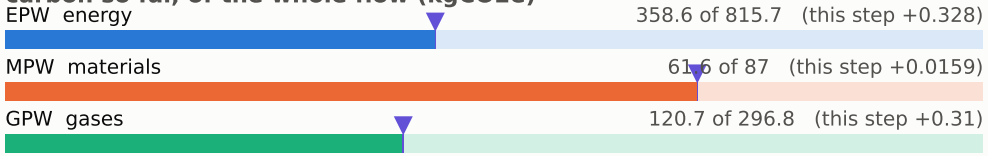

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

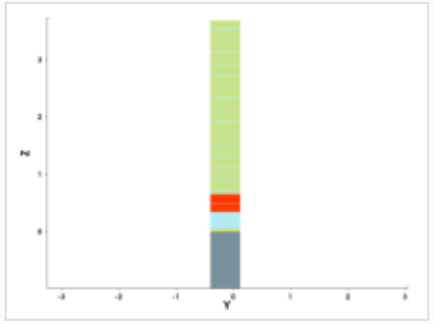

y cut at -0.150 µm

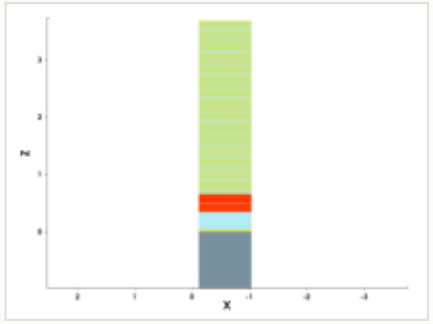

mask for this step

no mask for this step

steps by process area

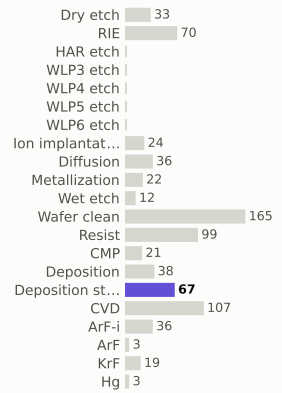

materials deposited (g)

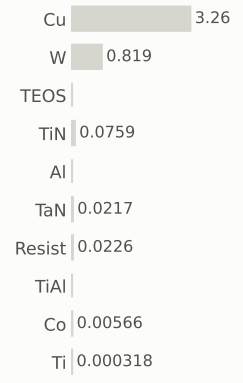

gases emitted (g)

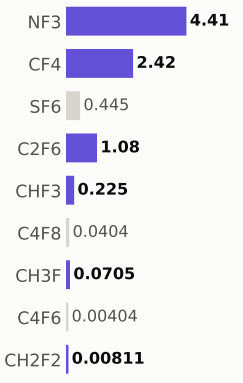

Step #15870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	541.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

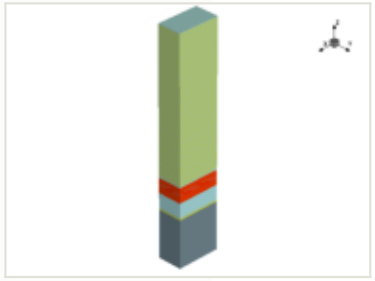

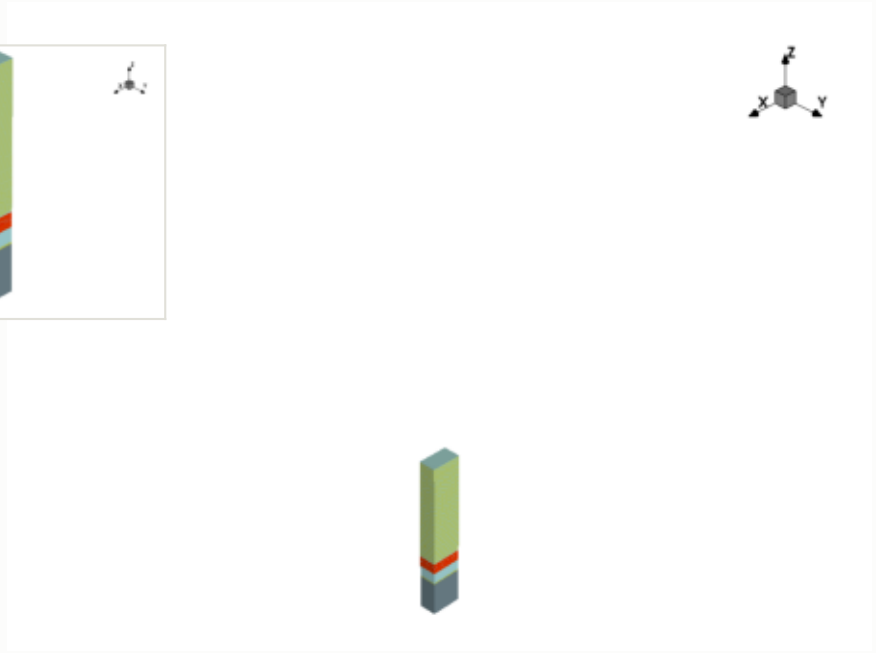

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

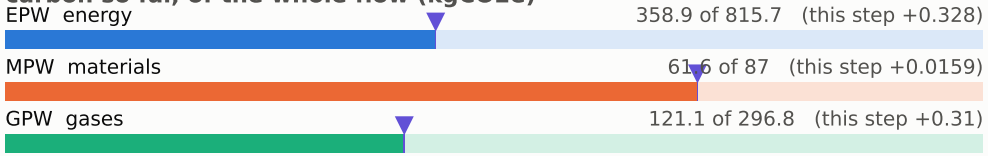

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

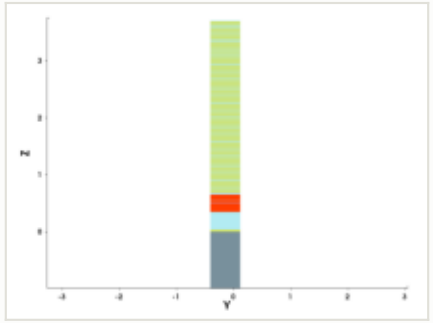

y cut at -0.150 µm

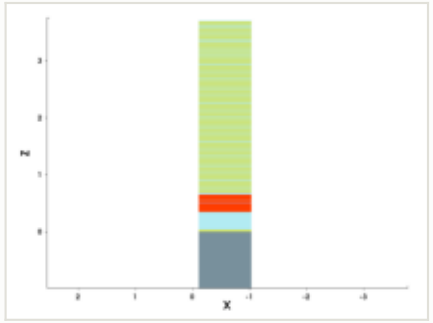

mask for this step

no mask for this step

steps by process area

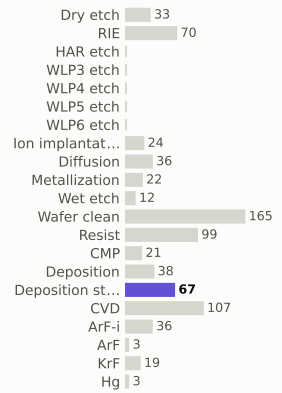

materials deposited (g)

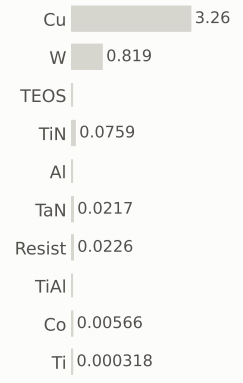

gases emitted (g)

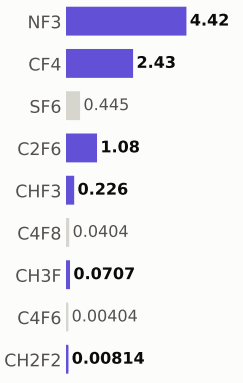

Step #15880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	542.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

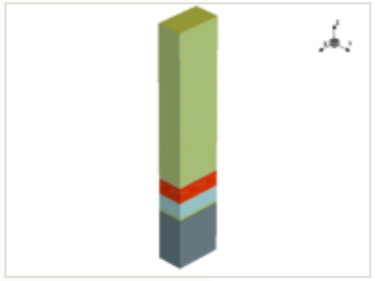

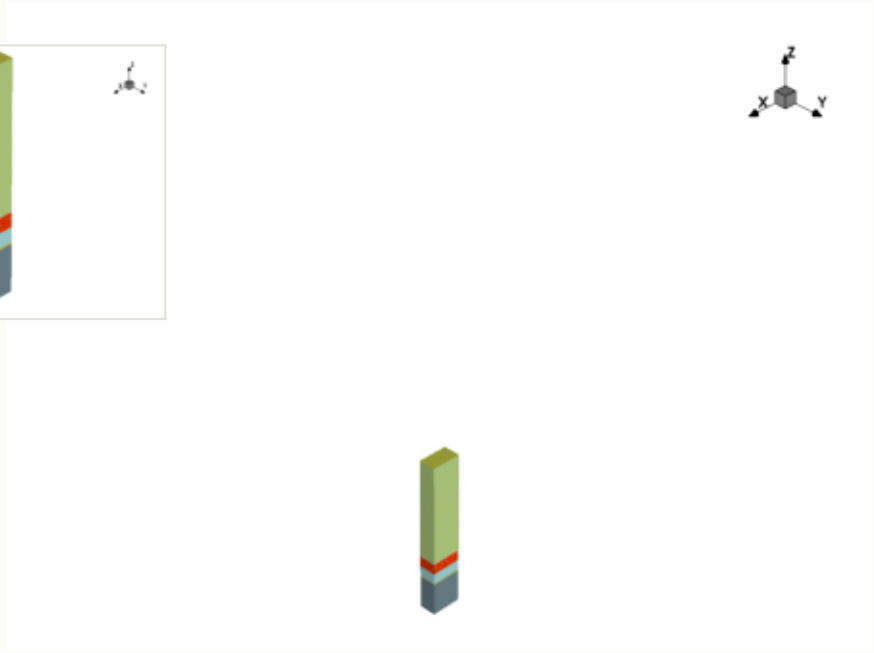

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

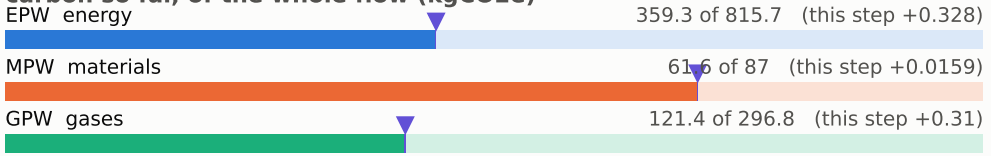

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

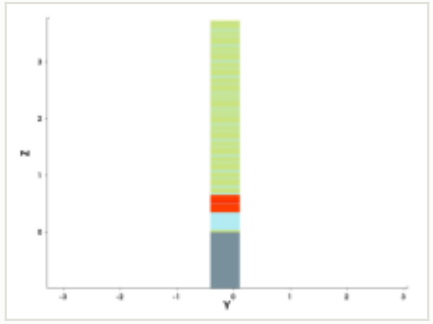

y cut at -0.150 µm

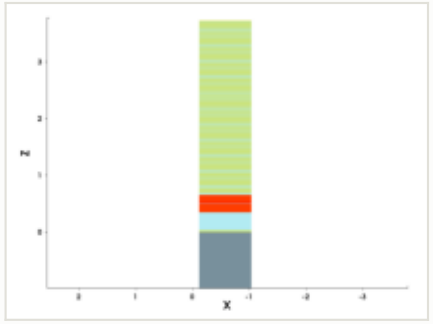

mask for this step

no mask for this step

steps by process area

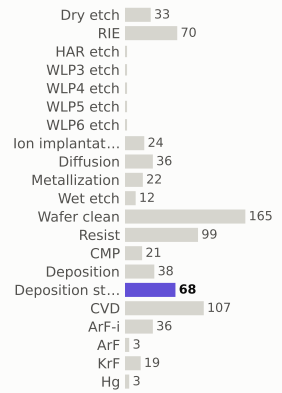

materials deposited (g)

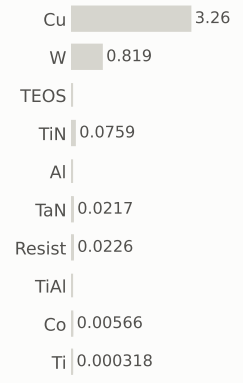

gases emitted (g)

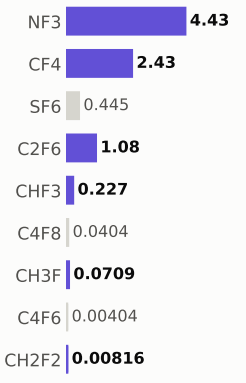

Step #15890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	542.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

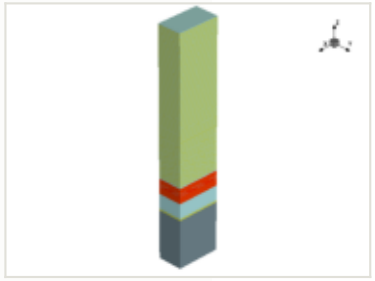

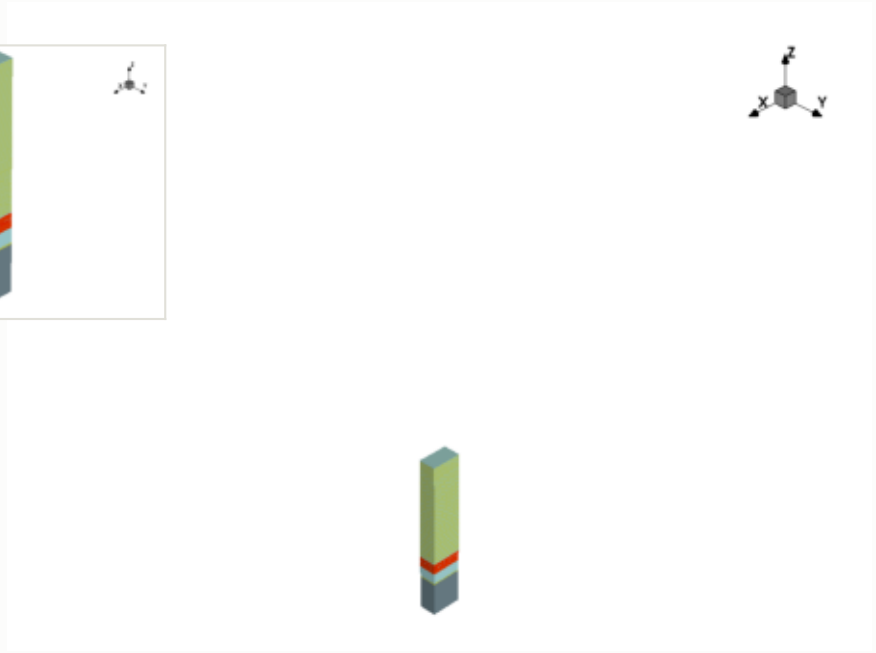

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

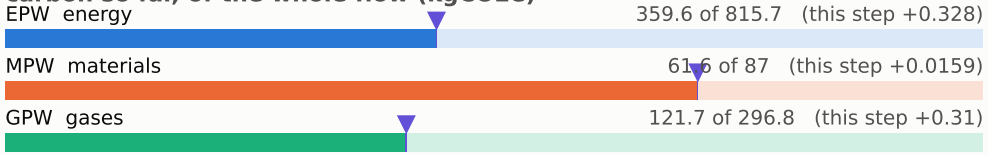

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

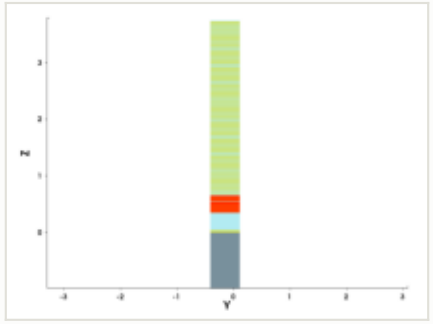

y cut at -0.150 µm

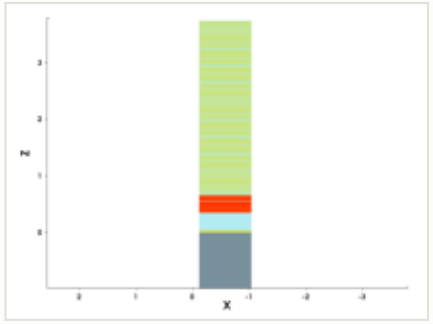

mask for this step

no mask for this step

steps by process area

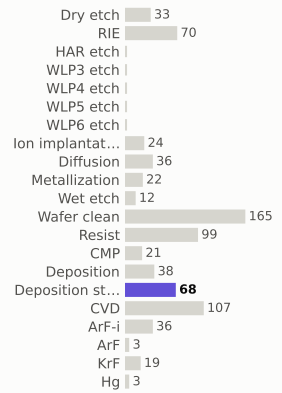

materials deposited (g)

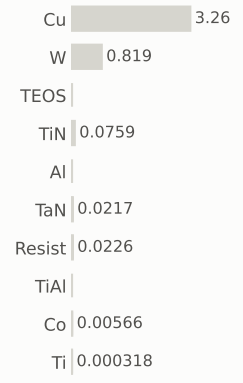

gases emitted (g)

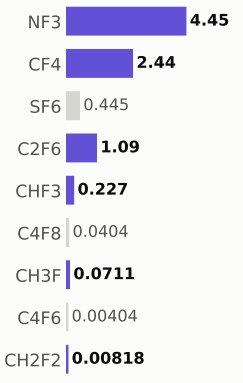

Step #15900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	543.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

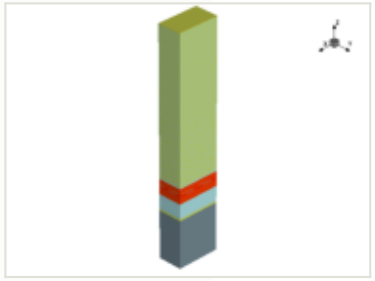

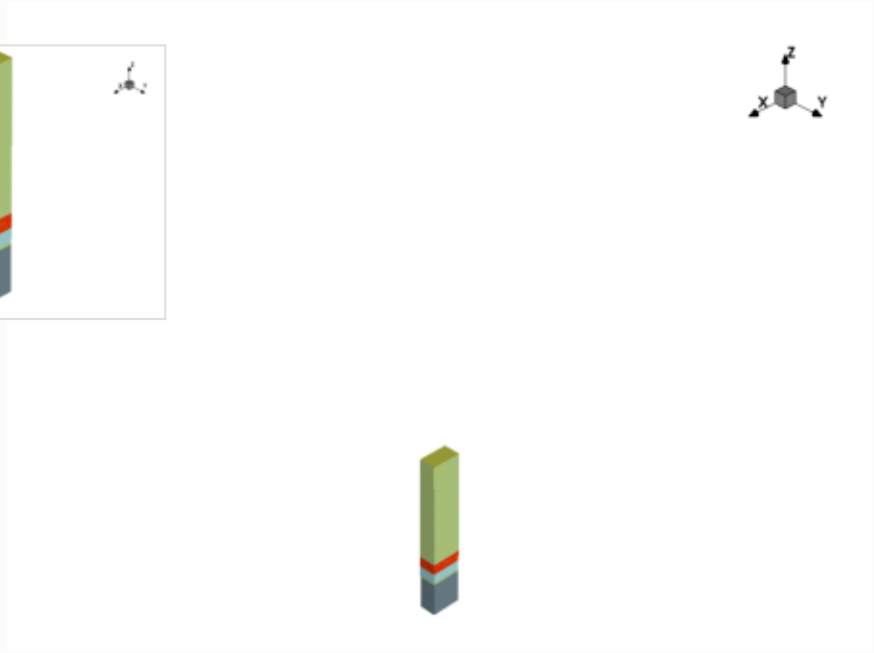

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

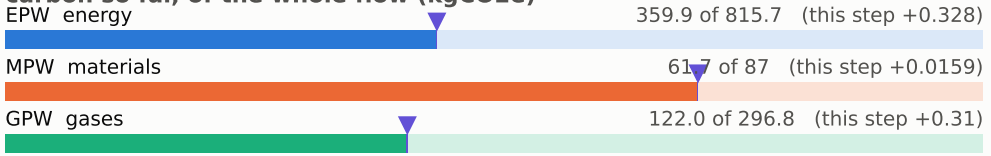

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

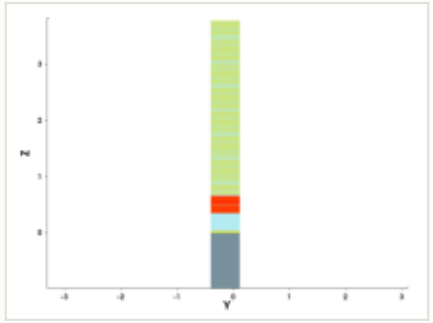

y cut at -0.150 µm

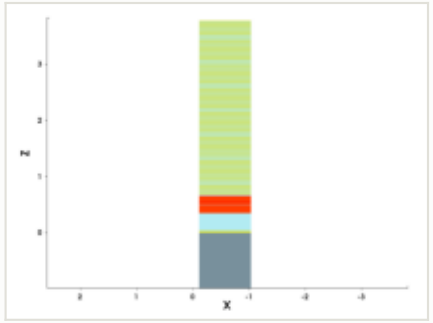

mask for this step

no mask for this step

steps by process area

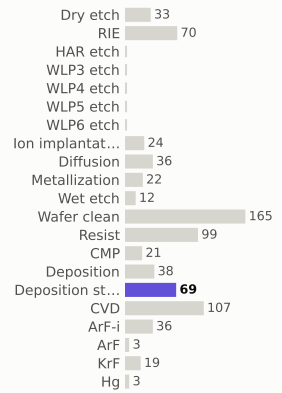

materials deposited (g)

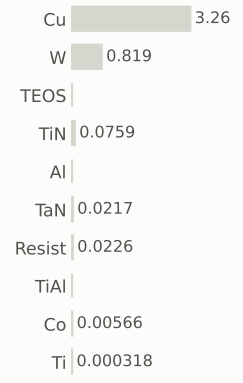

gases emitted (g)

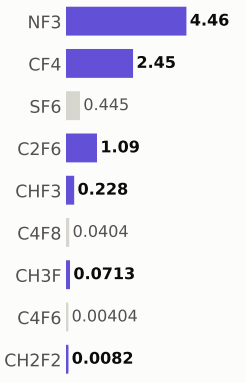

Step #15910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	544.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

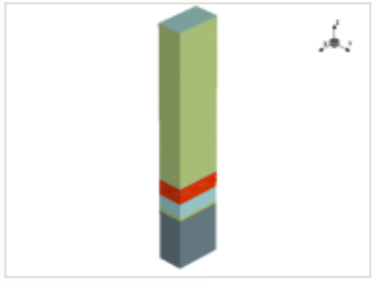

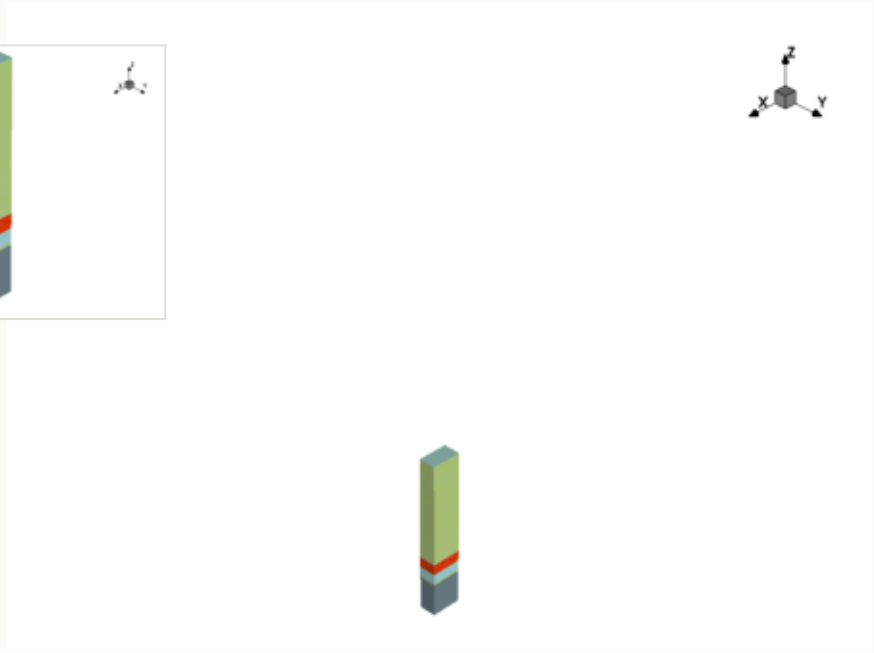

x cut at -0.570 µm

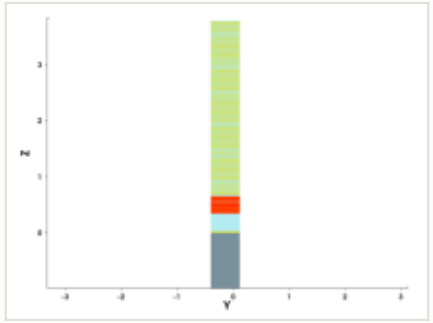

y cut at -0.150 µm

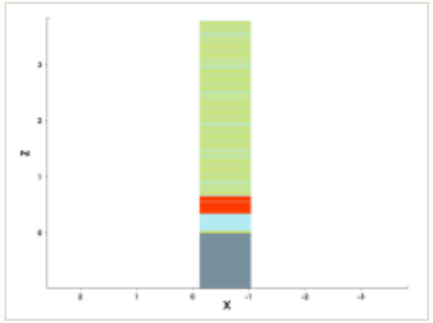

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

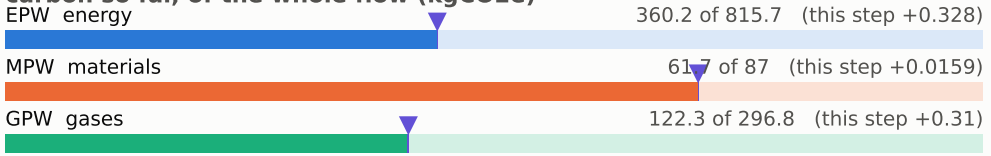

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

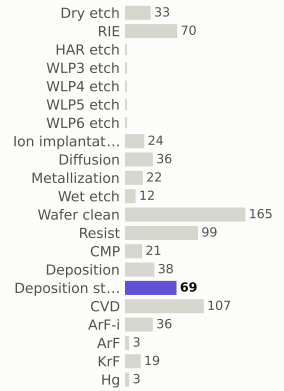

materials deposited (g)

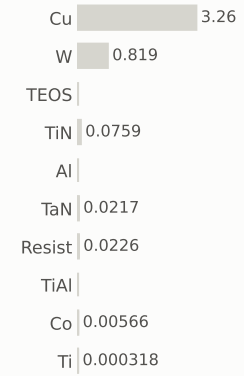

gases emitted (g)

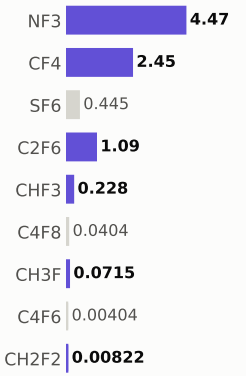

Step #15920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	544.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

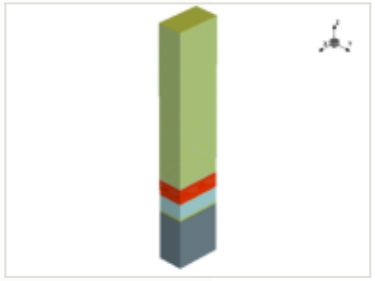

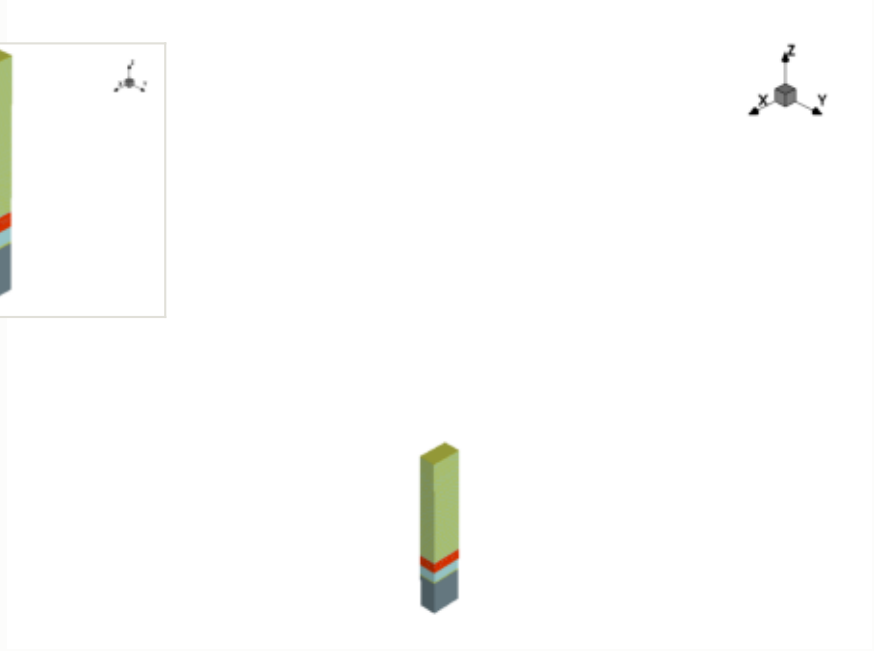

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

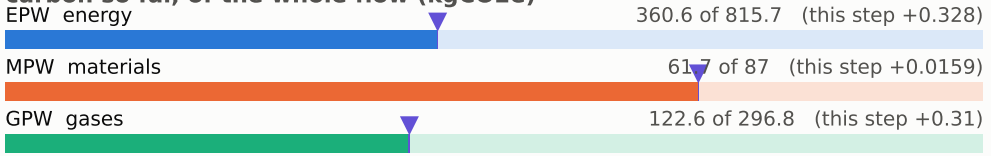

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

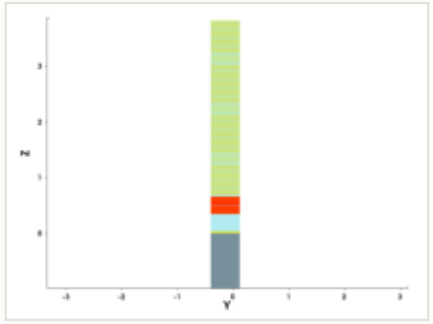

y cut at -0.150 µm

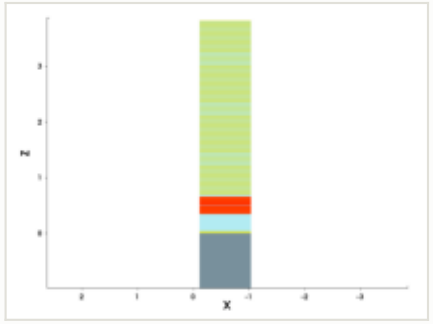

mask for this step

no mask for this step

steps by process area

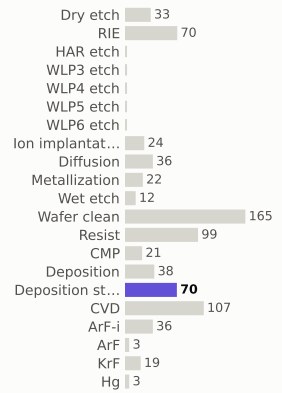

materials deposited (g)

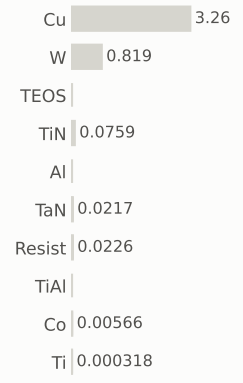

gases emitted (g)

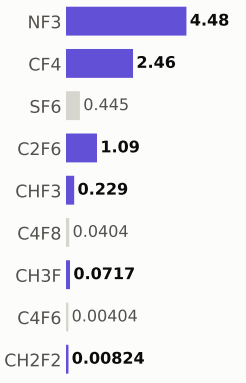

Step #15930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	545.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

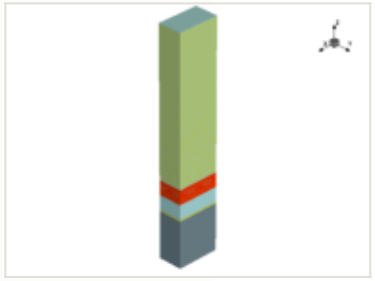

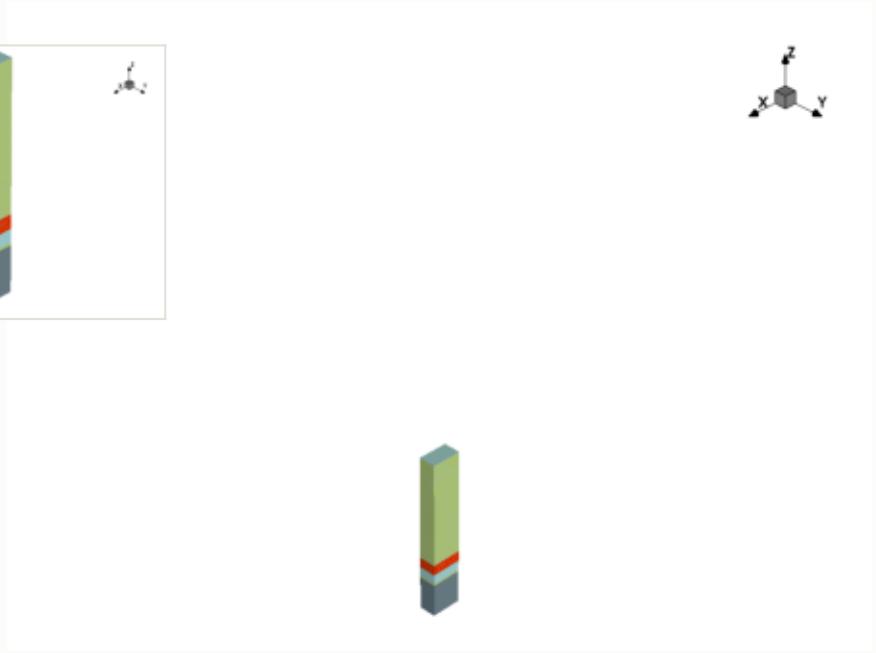

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

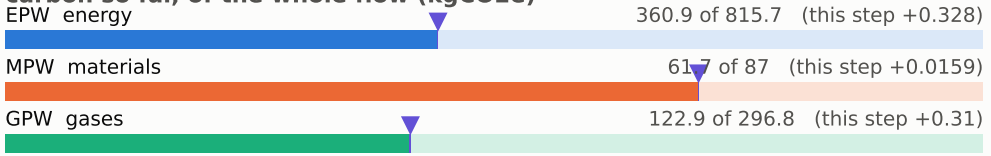

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

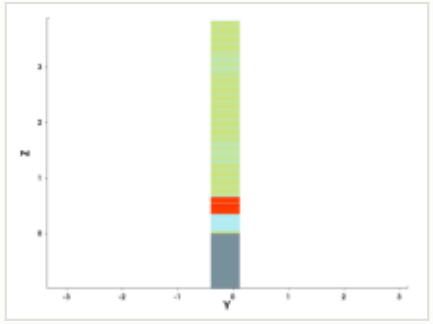

y cut at -0.150 µm

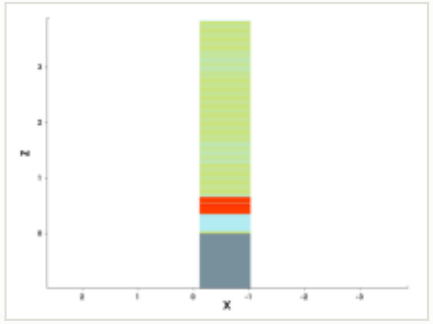

mask for this step

no mask for this step

steps by process area

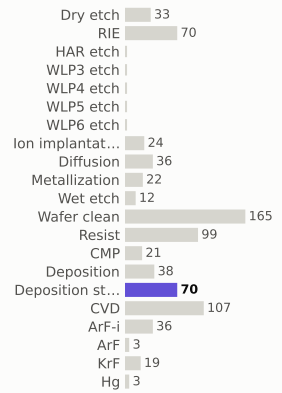

materials deposited (g)

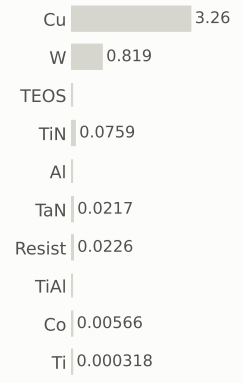

gases emitted (g)

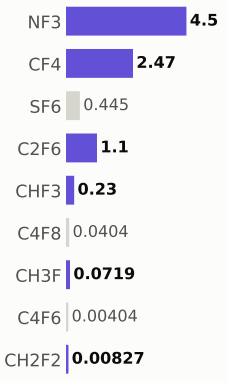

Step #15940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	546.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

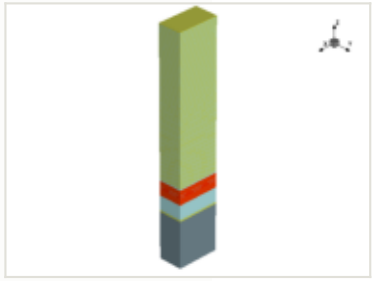

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

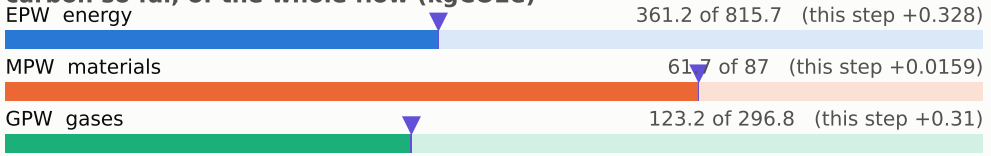

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

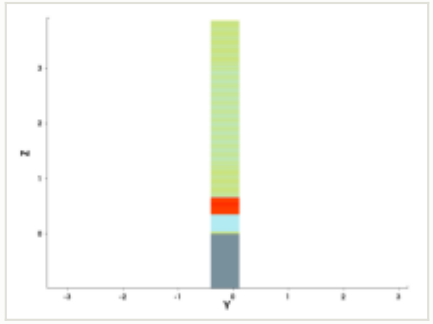

y cut at -0.150 µm

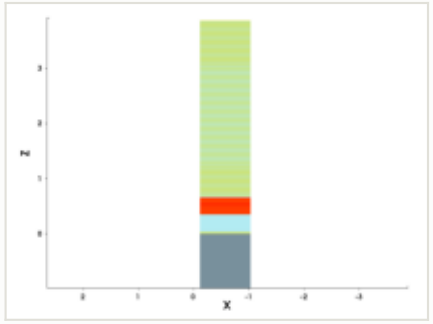

mask for this step

no mask for this step

steps by process area

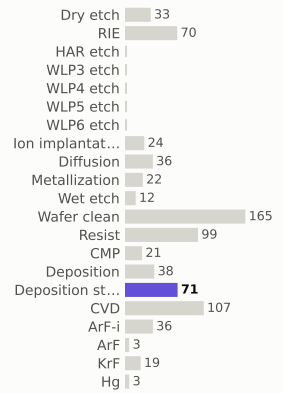

materials deposited (g)

gases emitted (g)

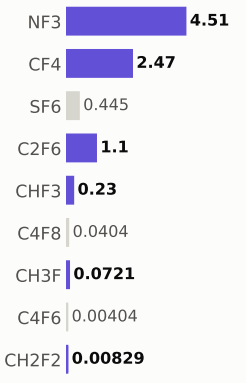

Step #15950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	546.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

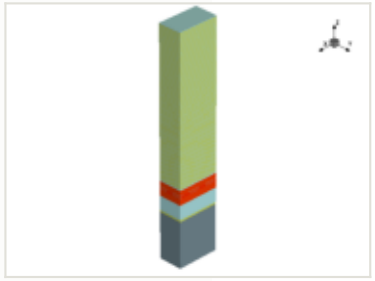

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

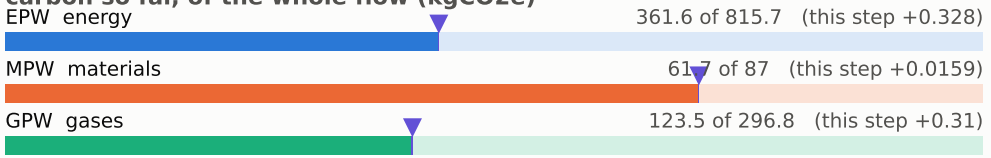

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

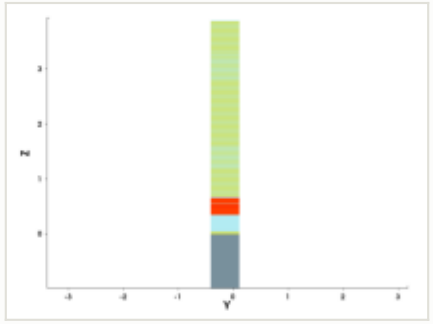

y cut at -0.150 µm

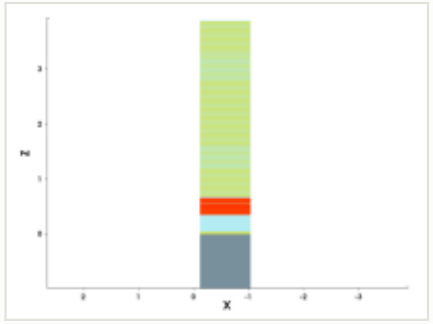

mask for this step

no mask for this step

steps by process area

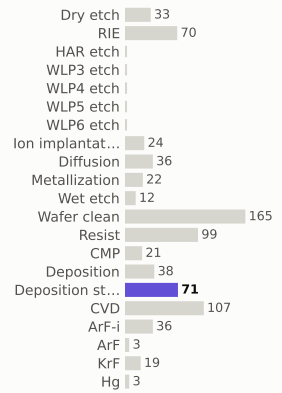

materials deposited (g)

gases emitted (g)

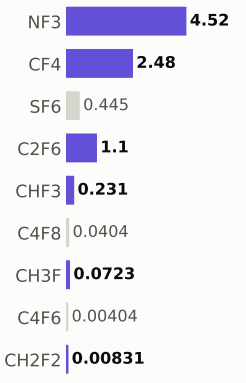

Step #15960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	547.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

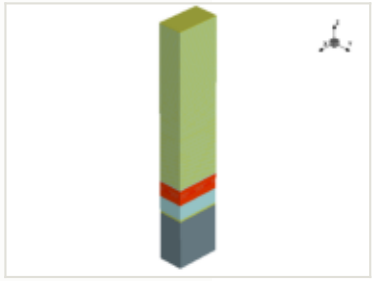

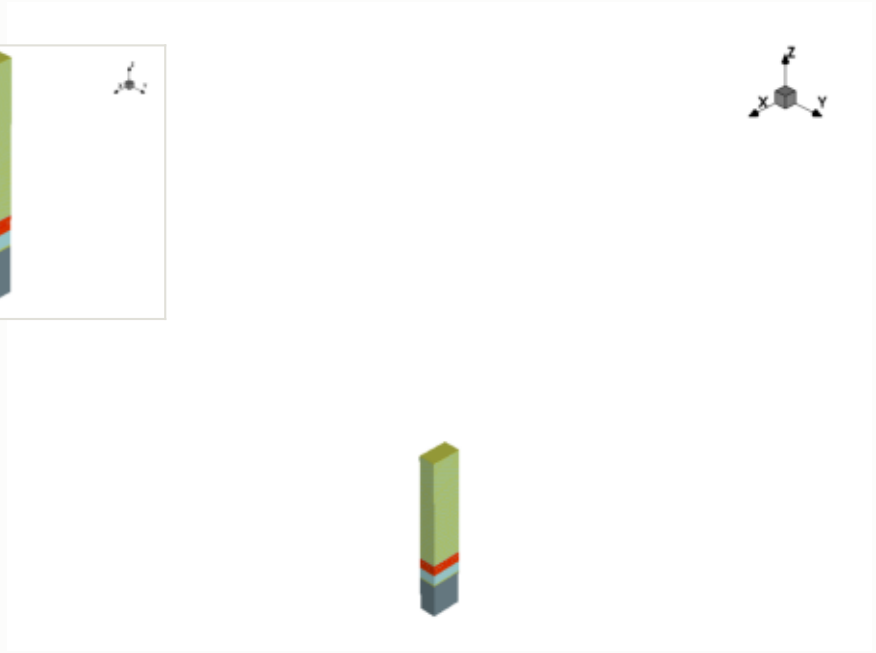

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

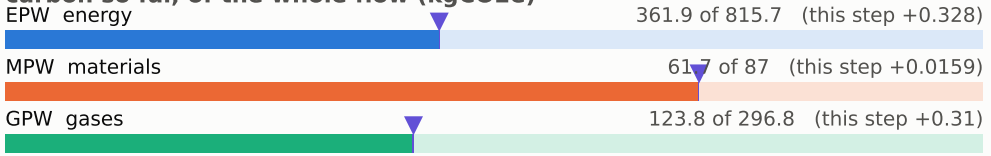

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

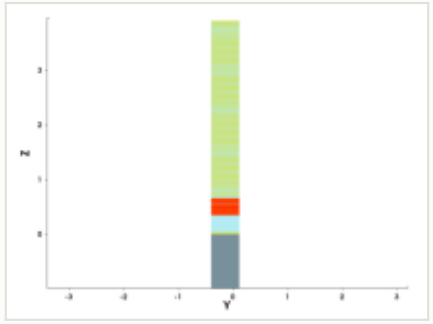

y cut at -0.150 µm

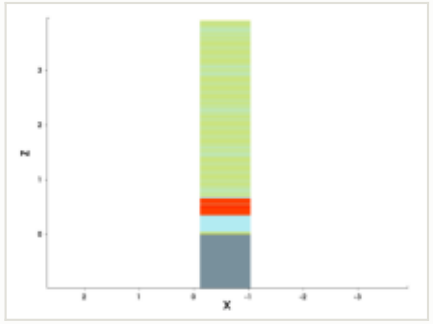

mask for this step

no mask for this step

steps by process area

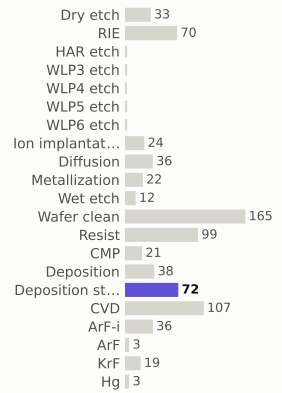

materials deposited (g)

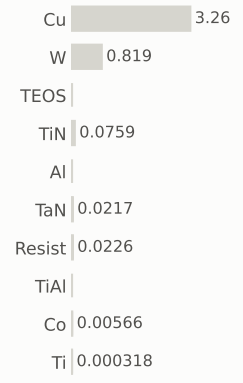

gases emitted (g)

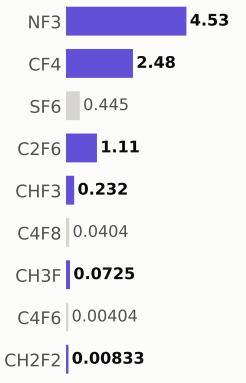

Step #15970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	548.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

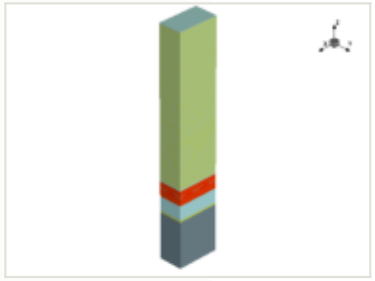

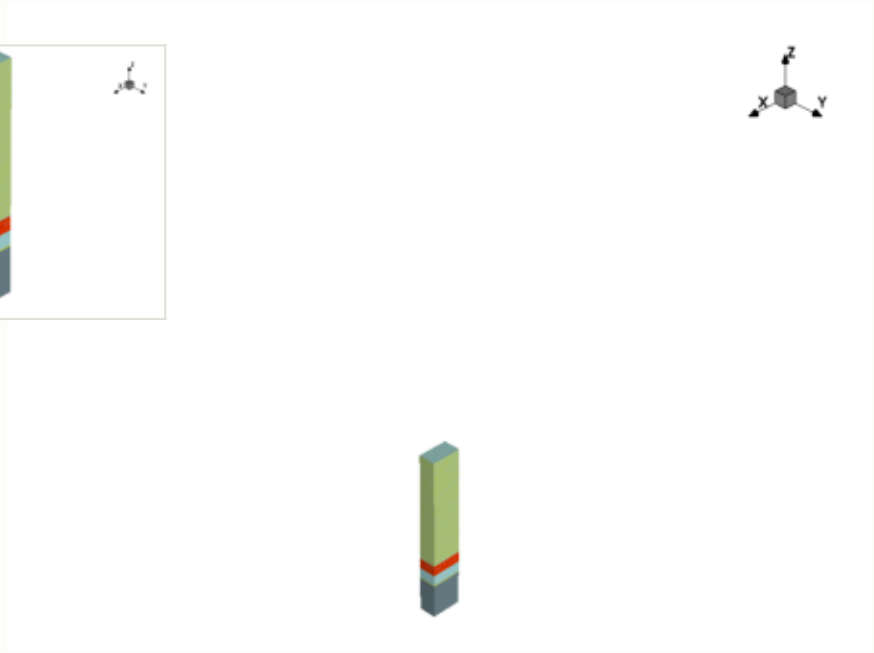

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

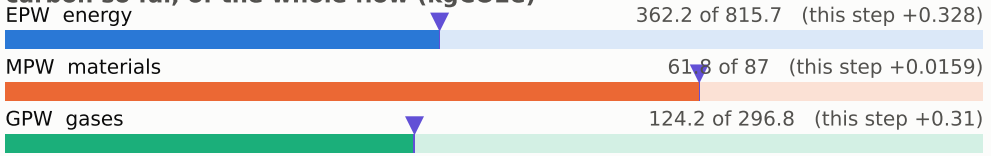

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

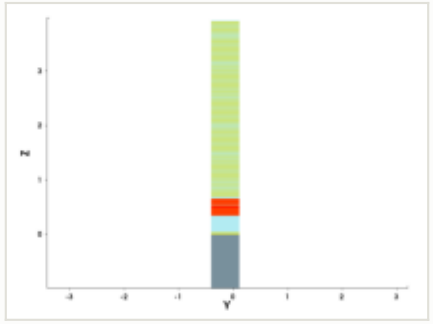

y cut at -0.150 µm

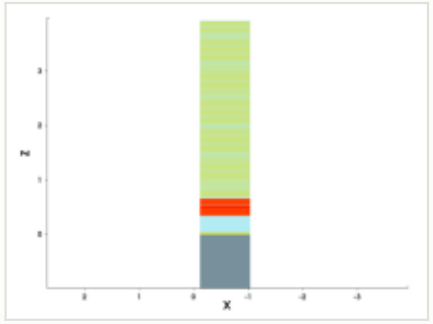

mask for this step

no mask for this step

steps by process area

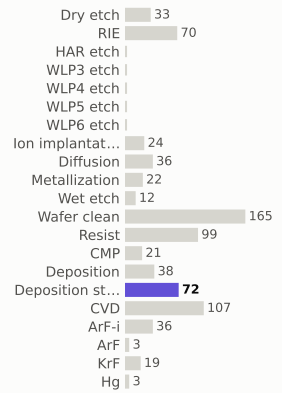

materials deposited (g)

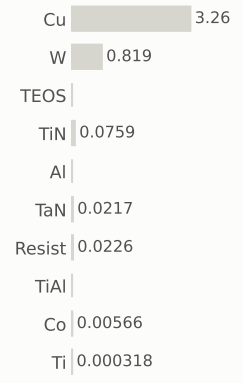

gases emitted (g)

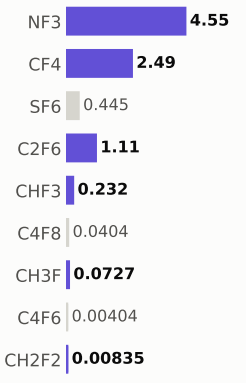

Step #15980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	548.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

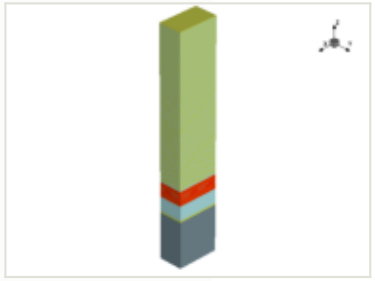

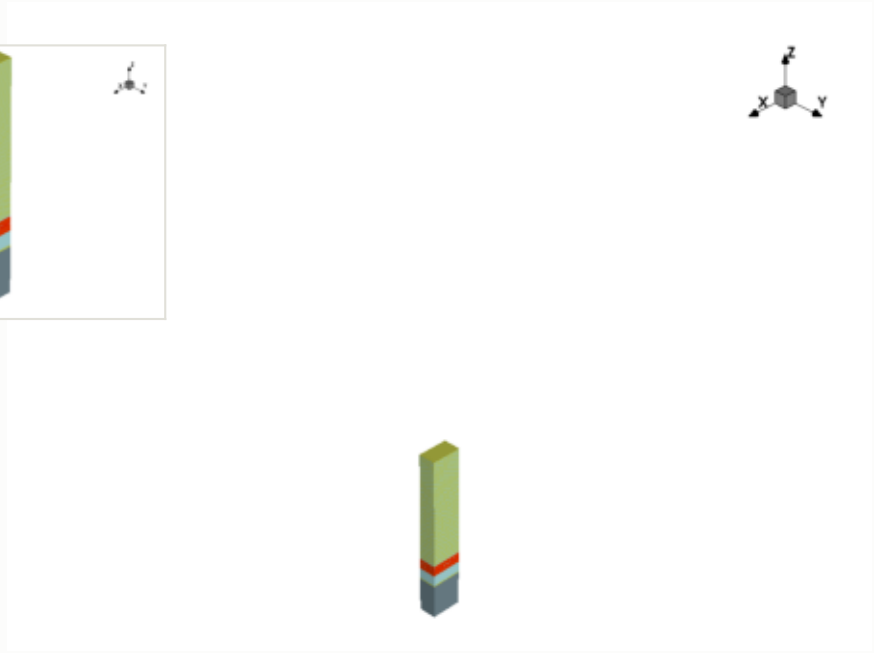

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

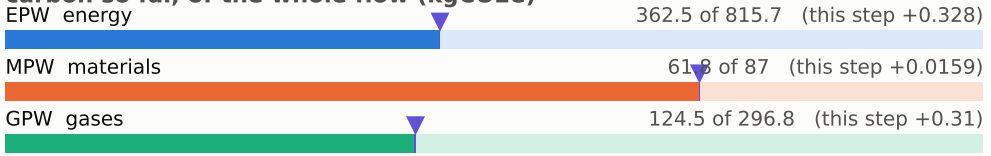

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

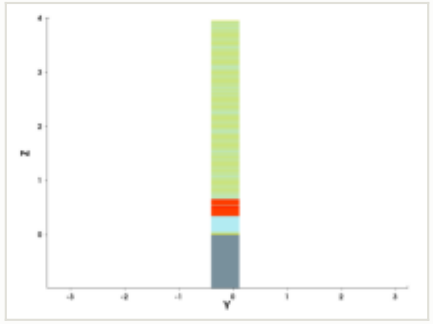

y cut at -0.150 µm

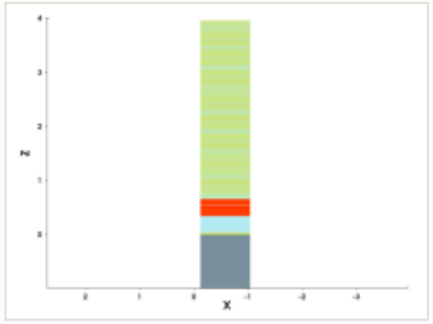

mask for this step

no mask for this step

steps by process area

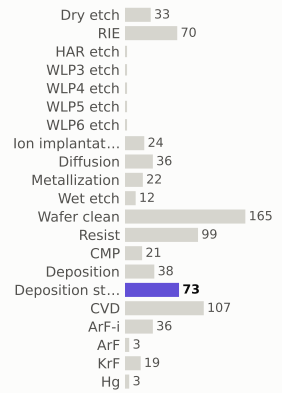

materials deposited (g)

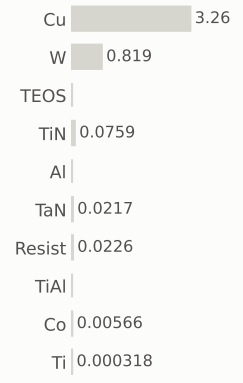

gases emitted (g)

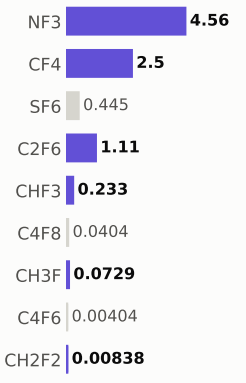

Step #15990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	549.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

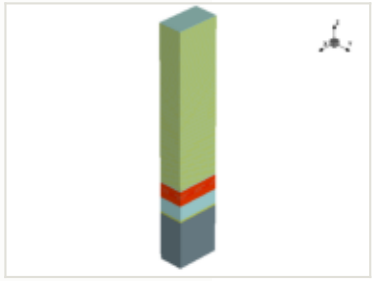

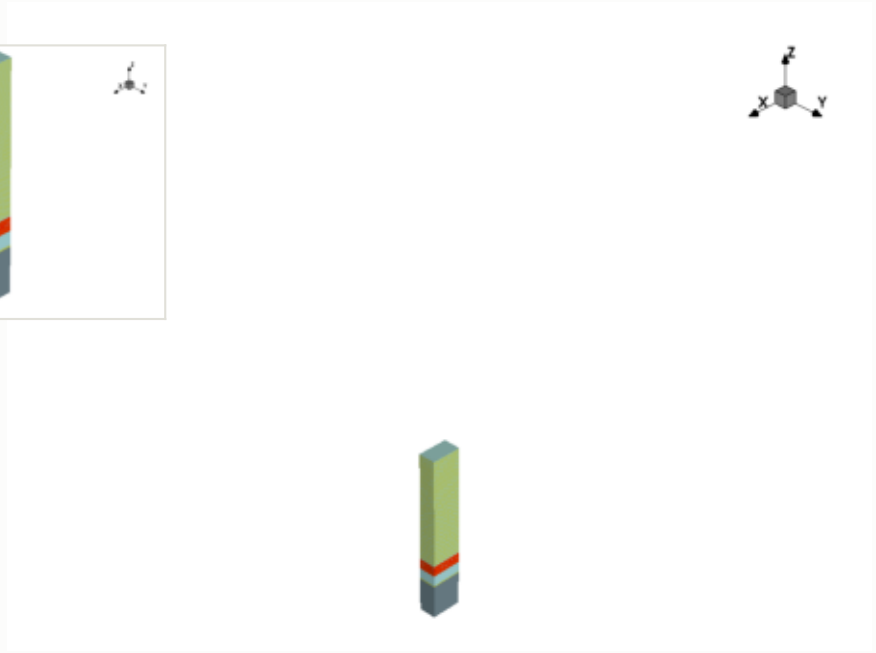

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

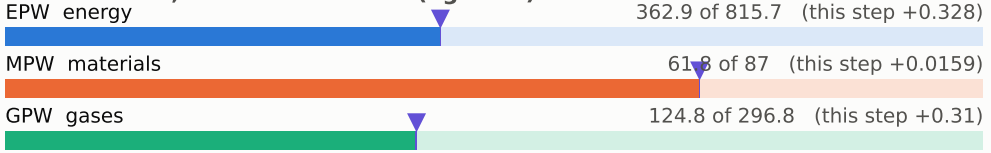

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

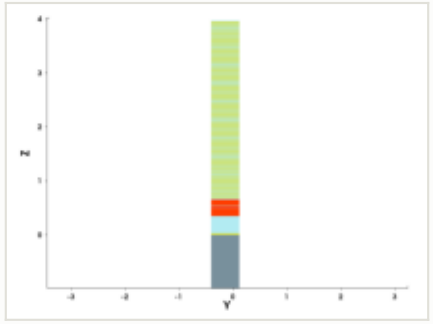

y cut at -0.150 µm

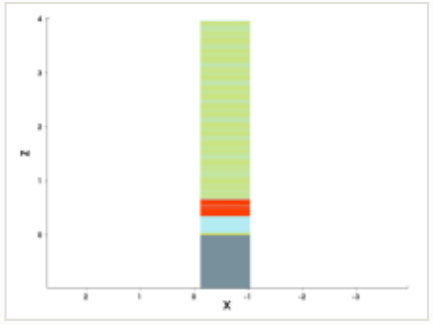

mask for this step

no mask for this step

steps by process area

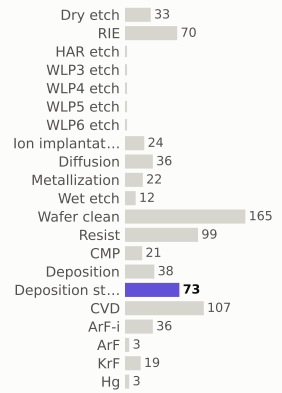

materials deposited (g)

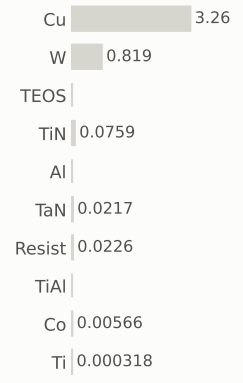

gases emitted (g)

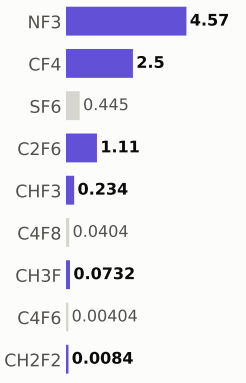

Step #16000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	550.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

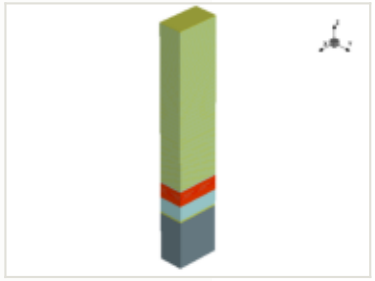

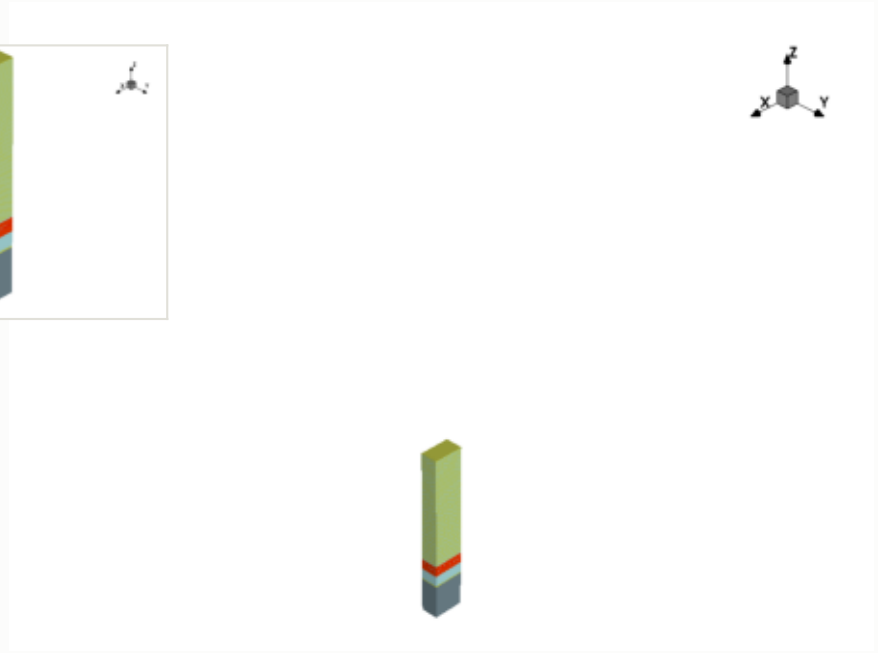

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

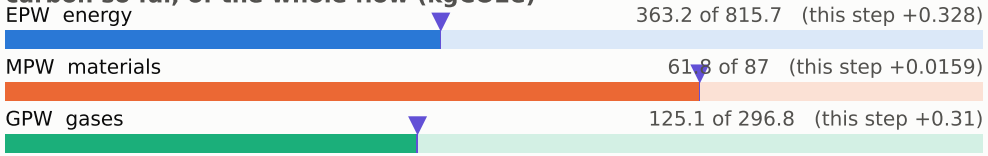

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

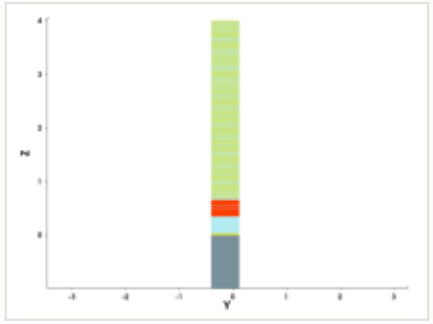

y cut at -0.150 µm

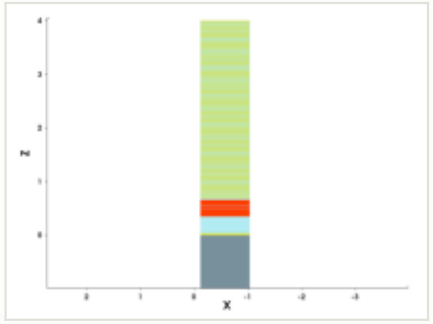

mask for this step

no mask for this step

steps by process area

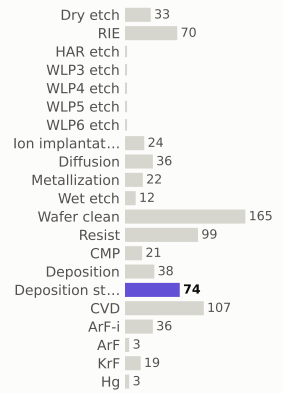

materials deposited (g)

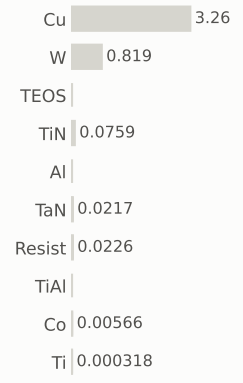

gases emitted (g)

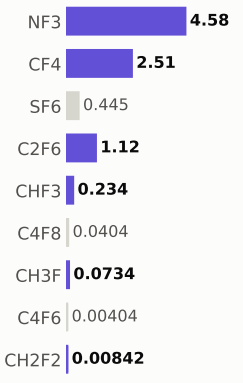

Step #16010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	550.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

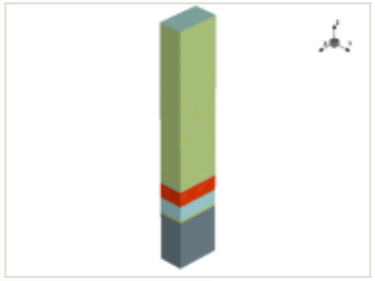

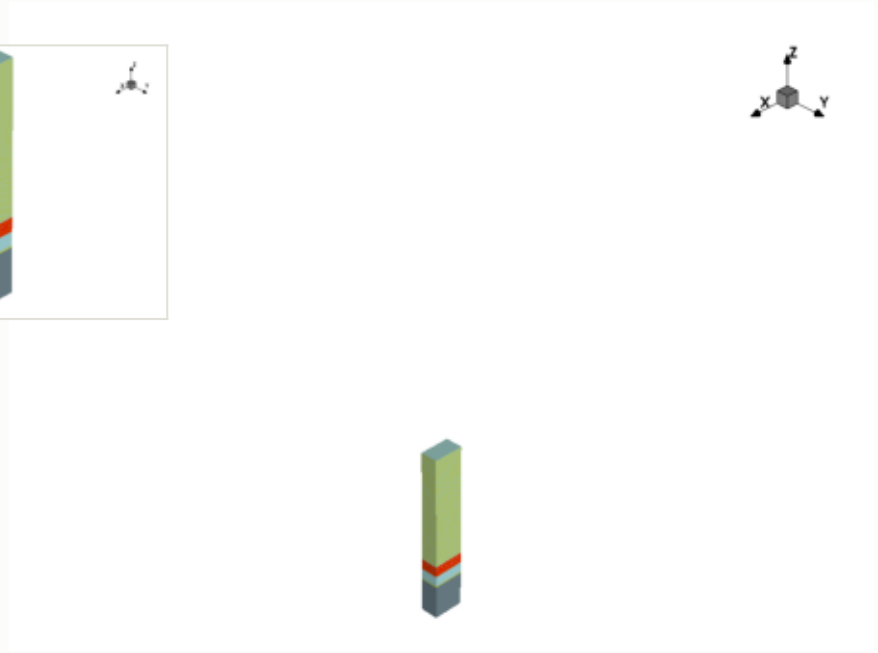

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

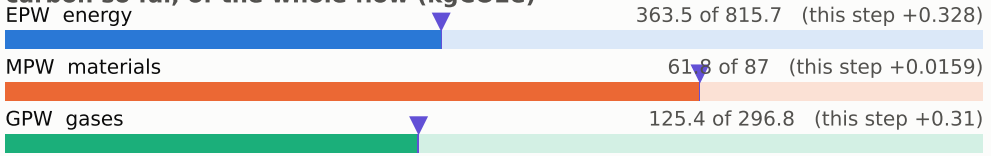

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

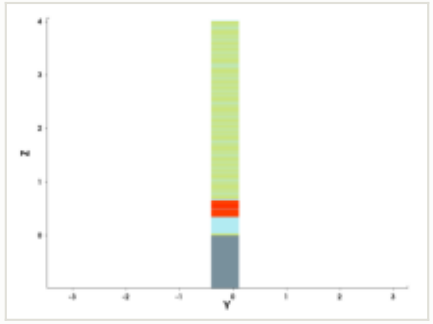

y cut at -0.150 µm

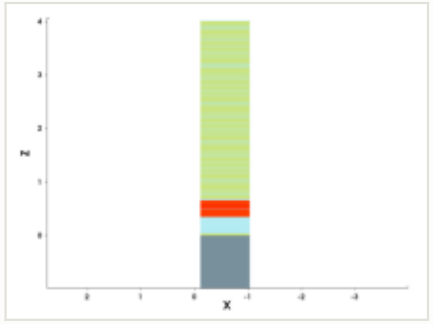

mask for this step

no mask for this step

steps by process area

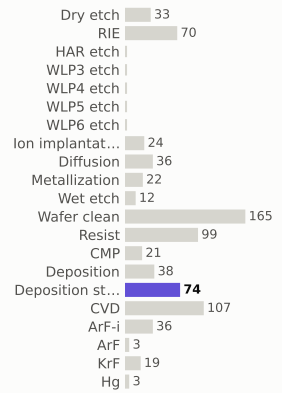

materials deposited (g)

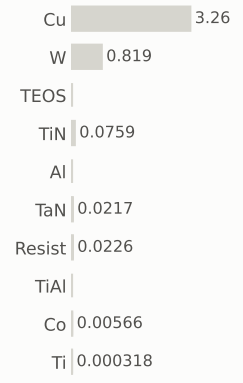

gases emitted (g)

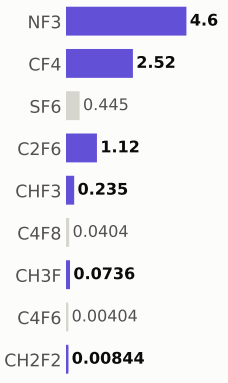

Step #16020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	551.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

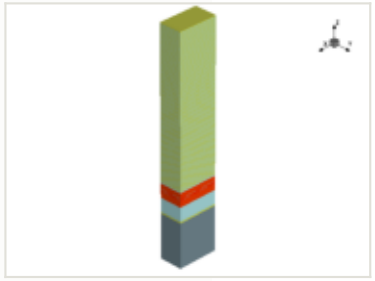

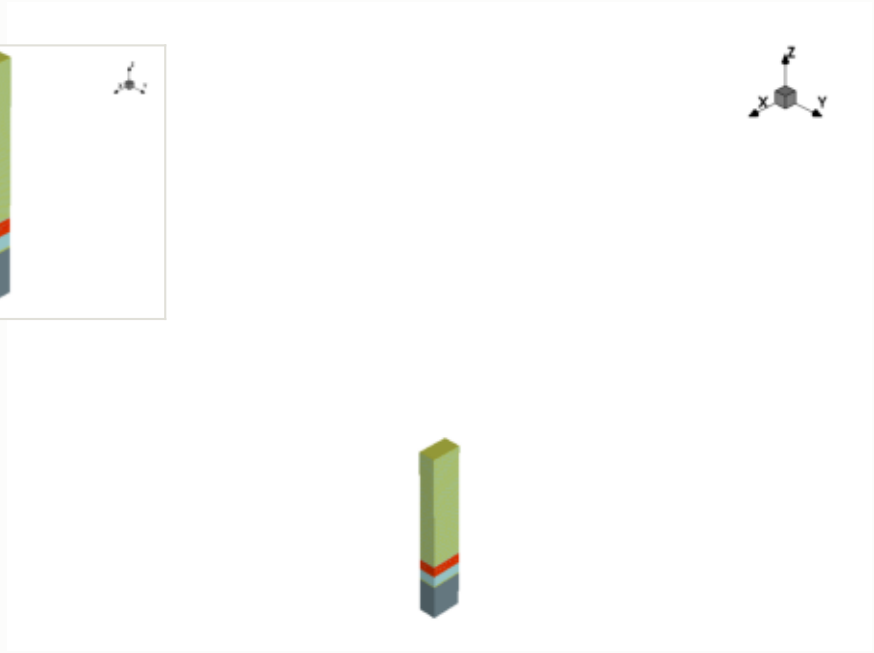

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

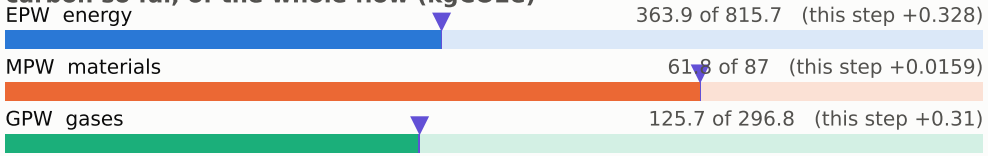

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

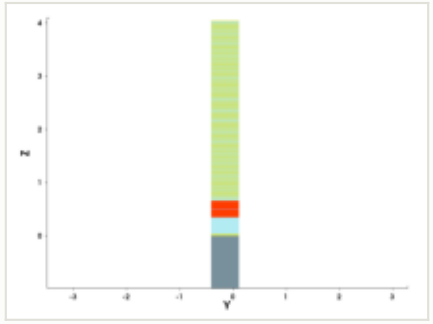

y cut at -0.150 µm

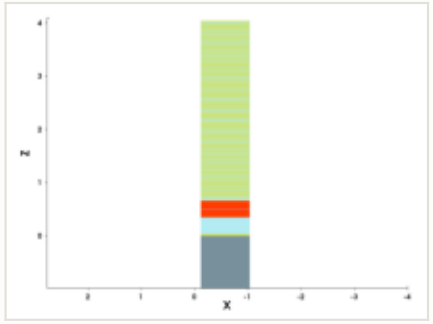

mask for this step

no mask for this step

steps by process area

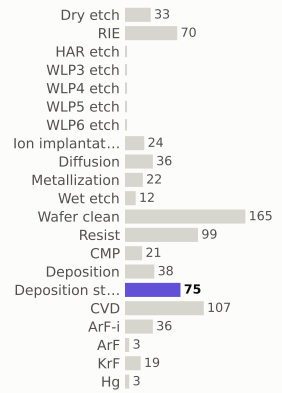

materials deposited (g)

gases emitted (g)

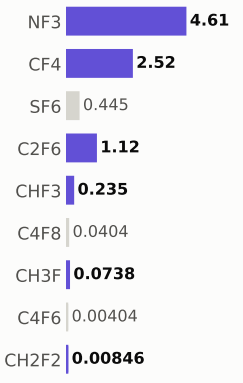

Step #16030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	552.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

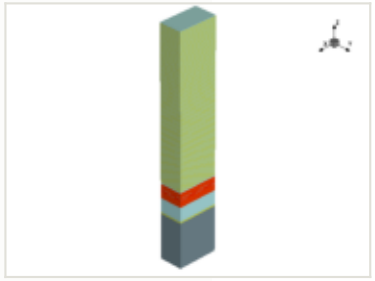

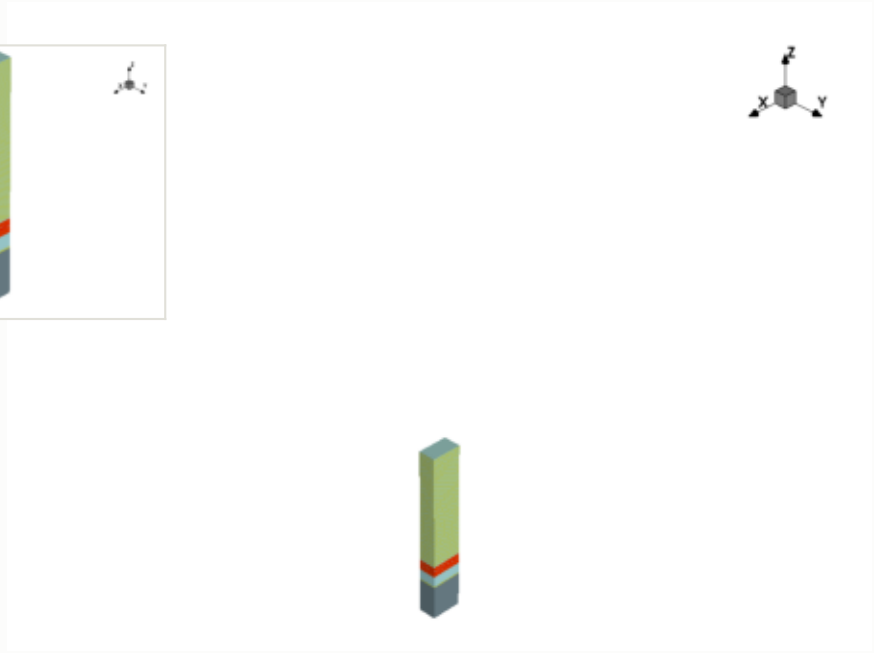

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

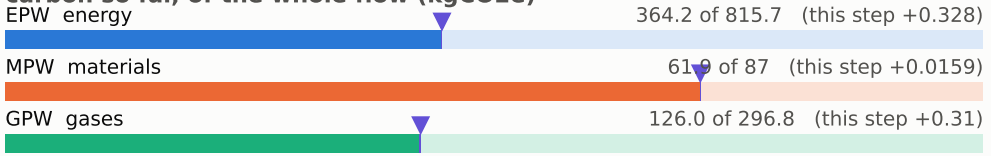

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

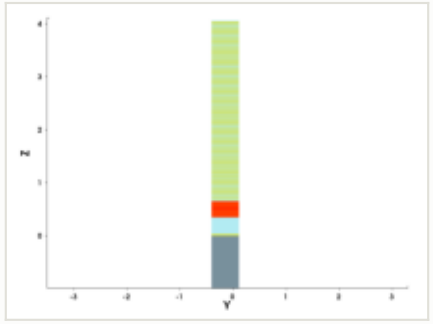

y cut at -0.150 µm

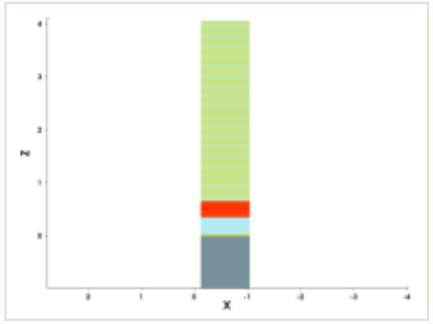

mask for this step

no mask for this step

steps by process area

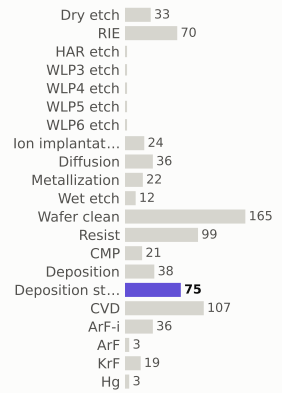

materials deposited (g)

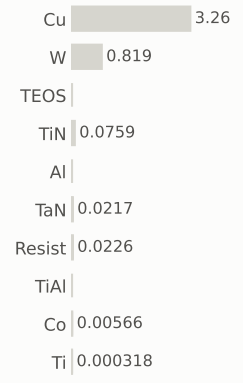

gases emitted (g)

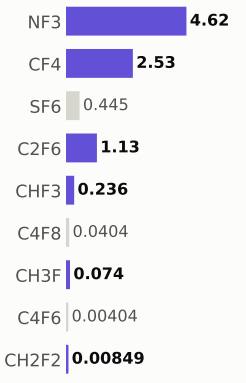

Step #16040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	552.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

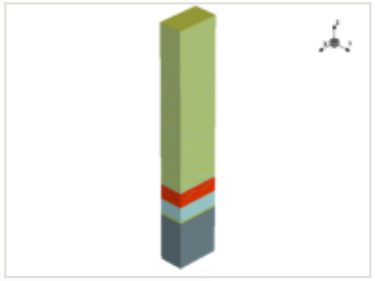

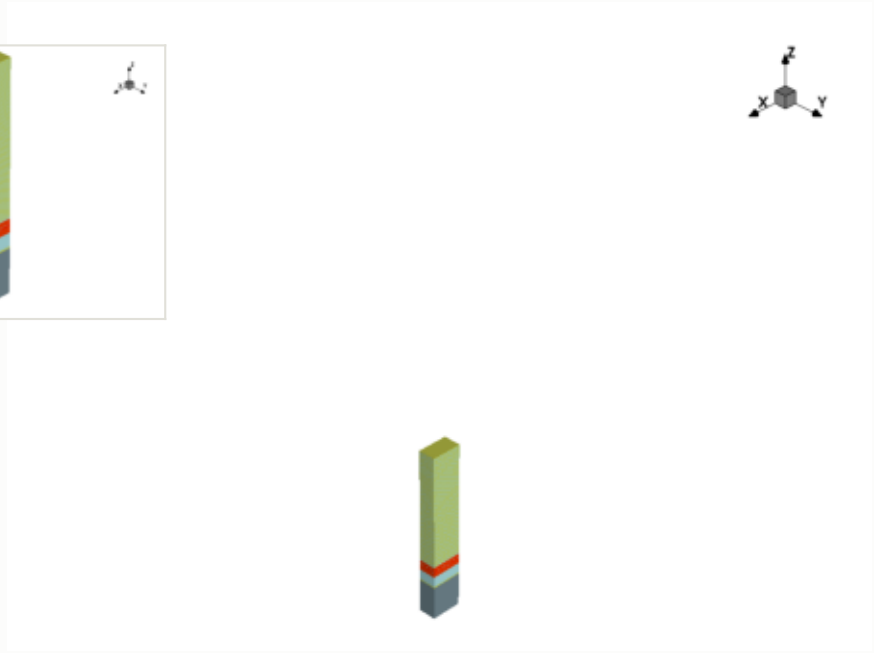

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

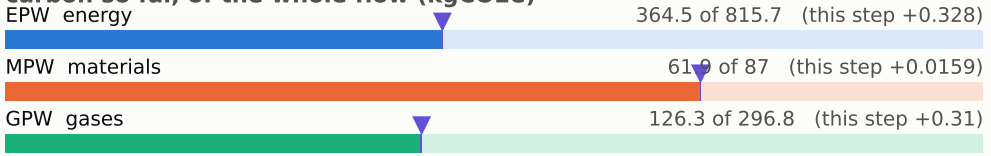

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

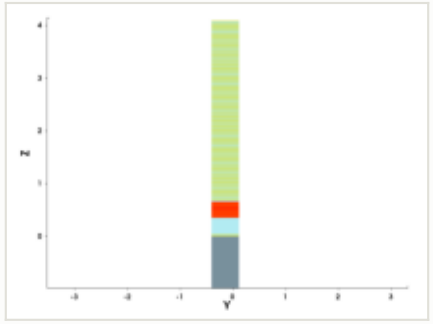

y cut at -0.150 µm

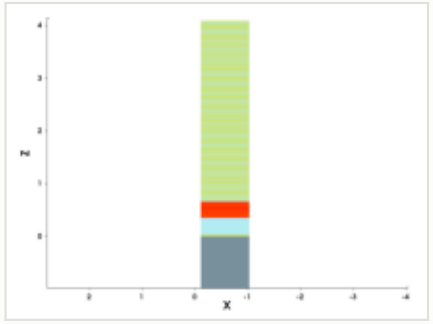

mask for this step

no mask for this step

steps by process area

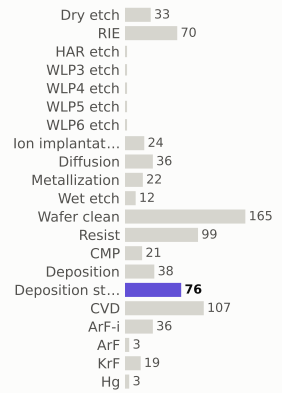

materials deposited (g)

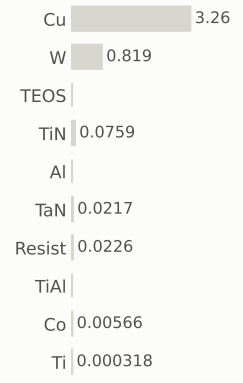

gases emitted (g)

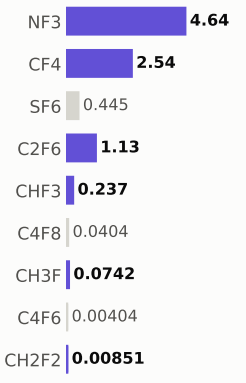

Step #16050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	553.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

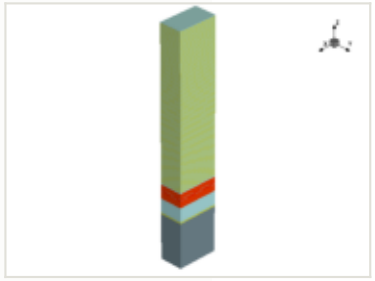

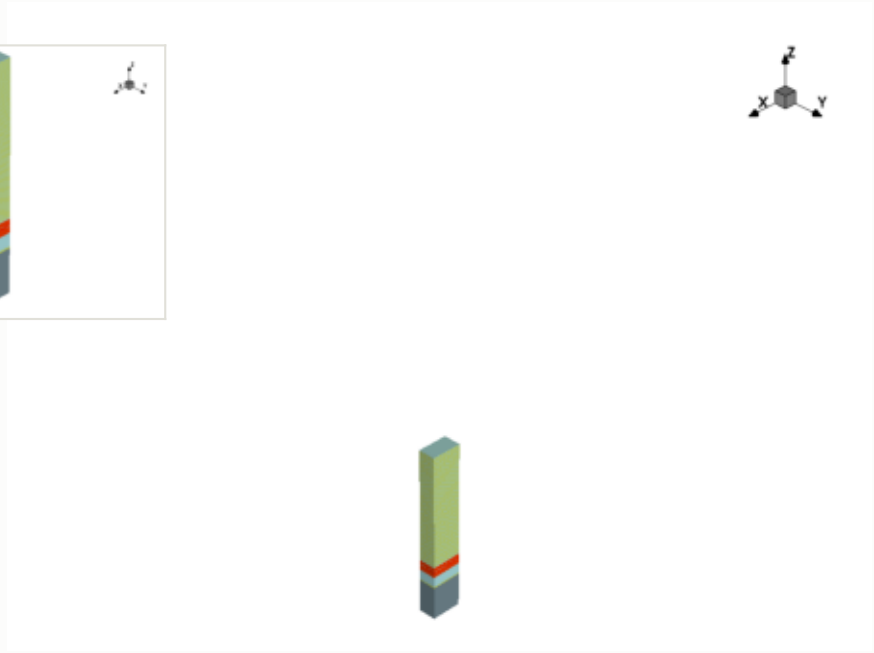

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

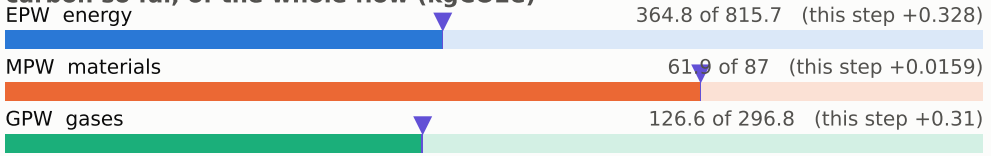

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

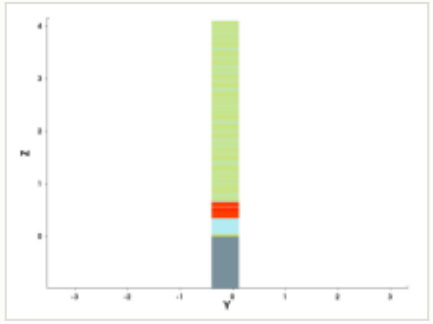

y cut at -0.150 µm

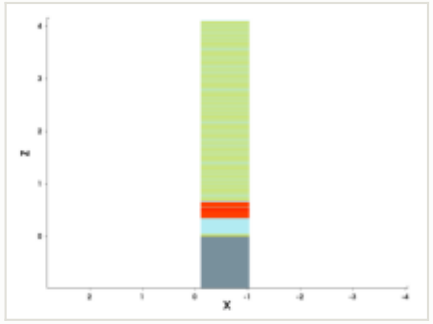

mask for this step

no mask for this step

steps by process area

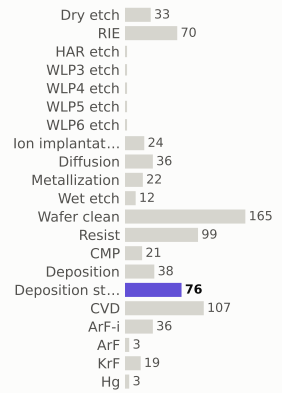

materials deposited (g)

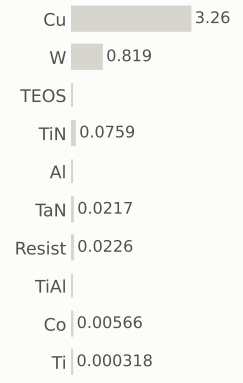

gases emitted (g)

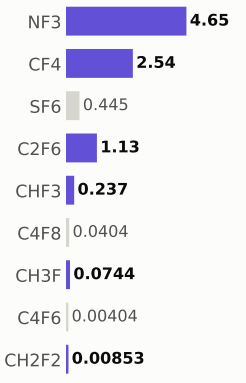

Step #16060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	554.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

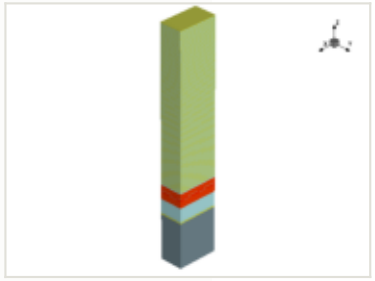

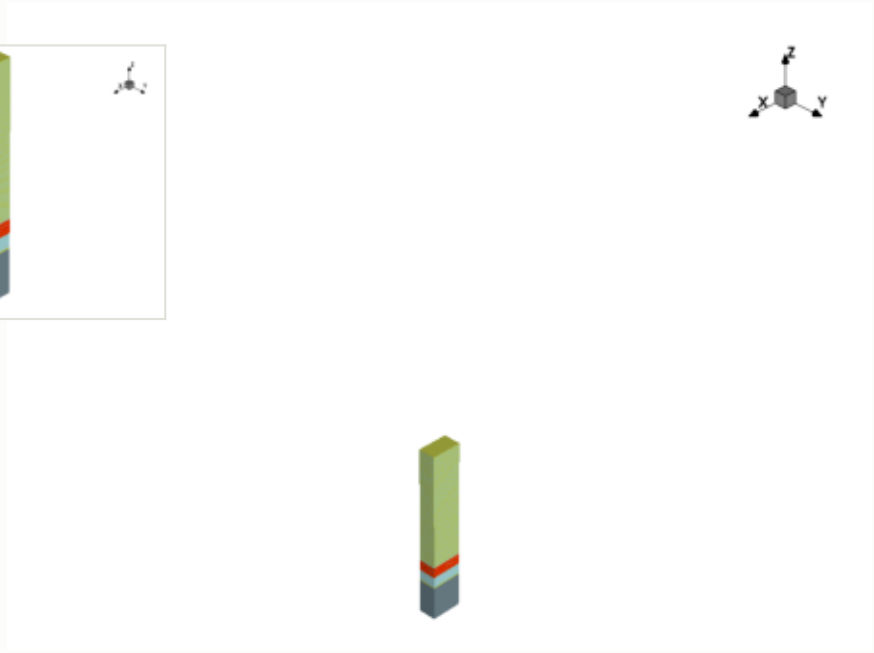

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

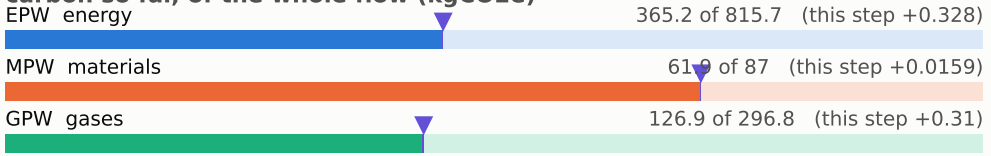

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

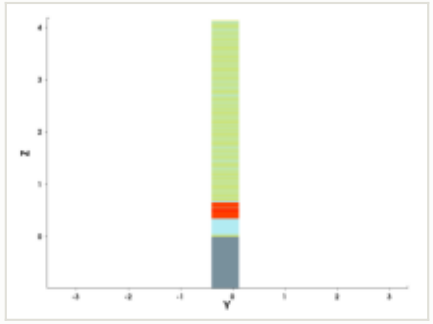

y cut at -0.150 µm

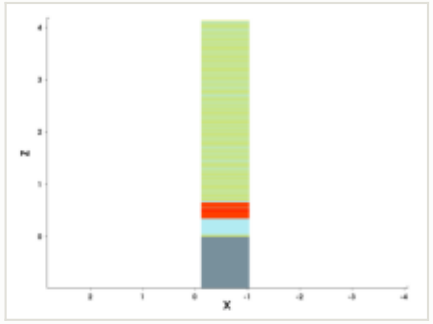

mask for this step

no mask for this step

steps by process area

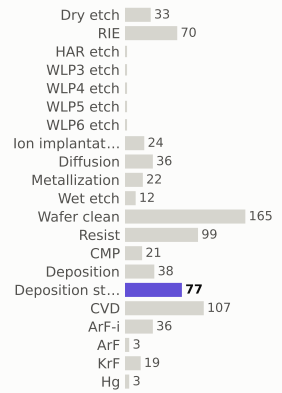

materials deposited (g)

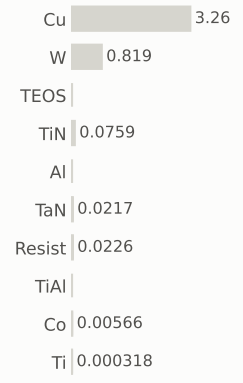

gases emitted (g)

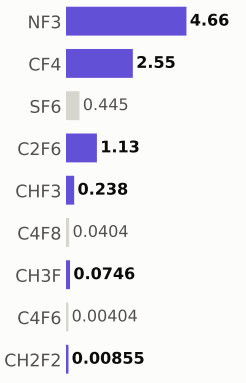

Step #16070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	554.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

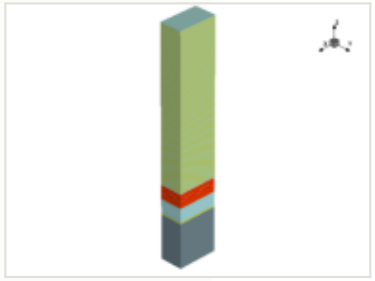

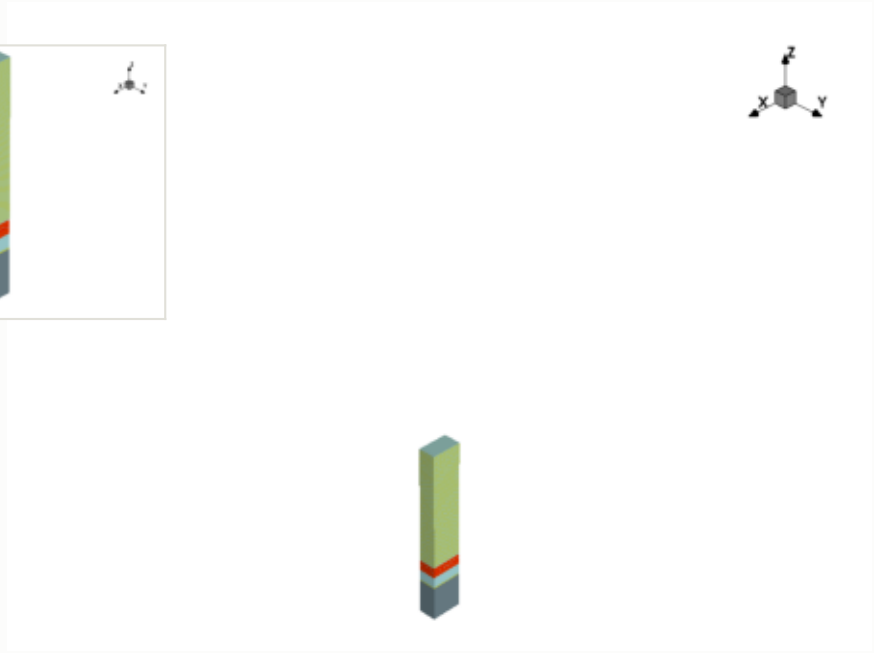

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

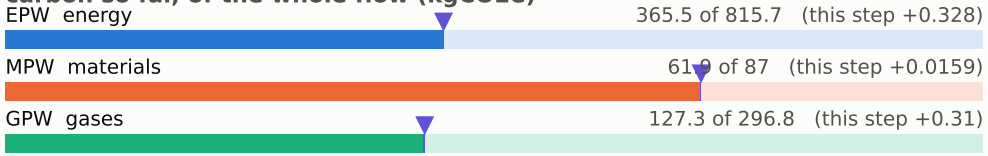

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

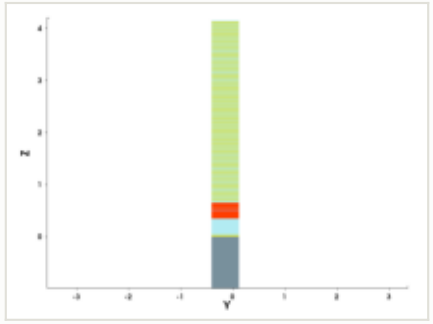

y cut at -0.150 µm

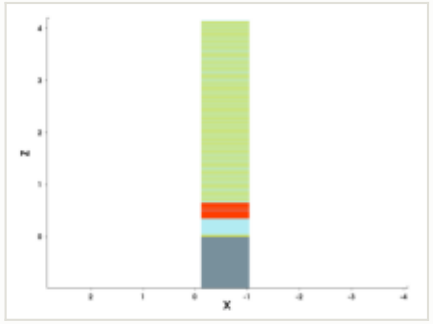

mask for this step

no mask for this step

steps by process area

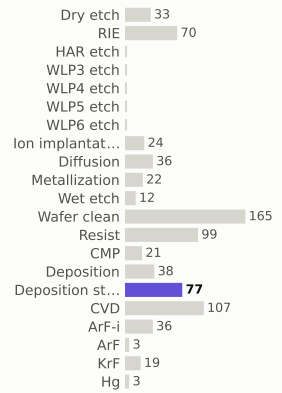

materials deposited (g)

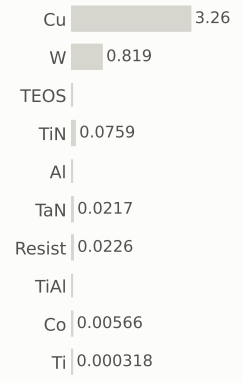

gases emitted (g)

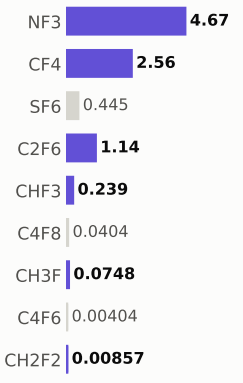

Step #16080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	555.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

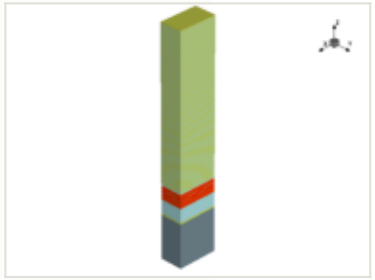

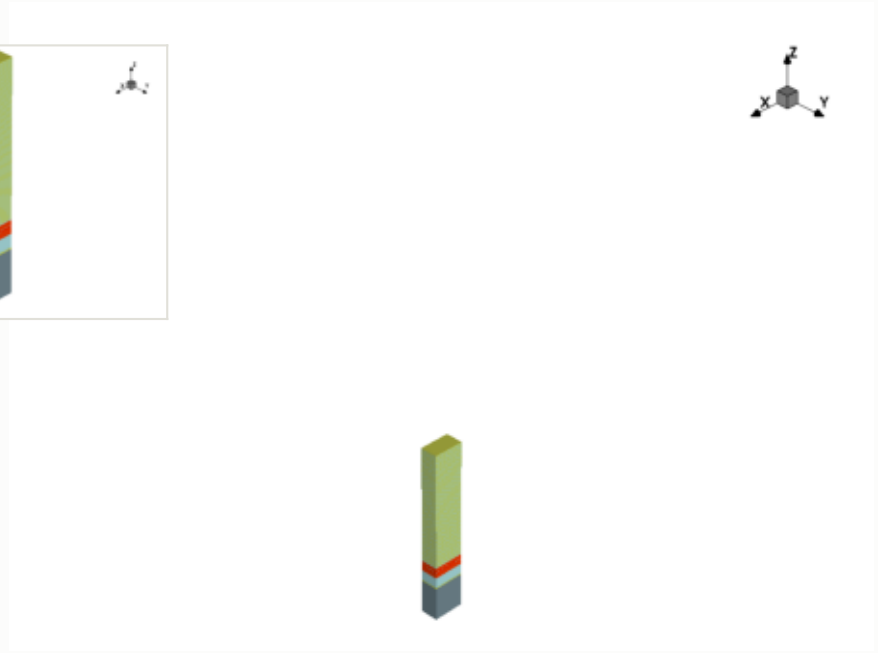

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

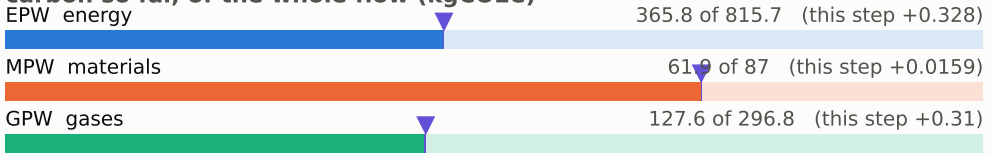

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

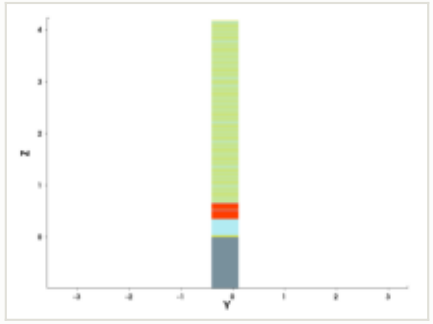

y cut at -0.150 µm

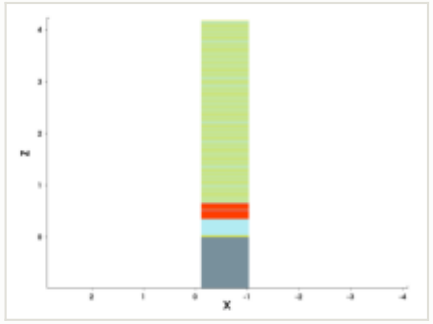

mask for this step

no mask for this step

steps by process area

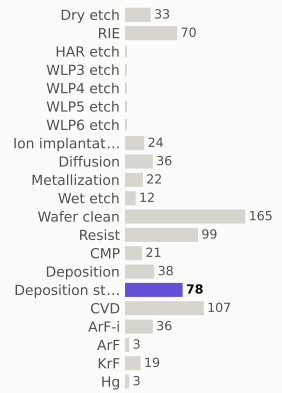

materials deposited (g)

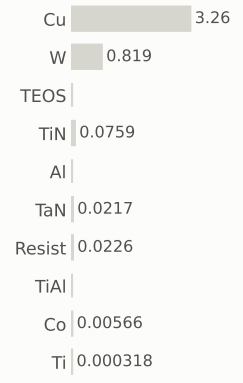

gases emitted (g)

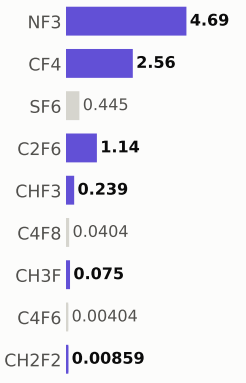

Step #16090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	556.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

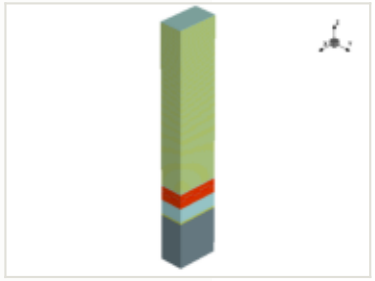

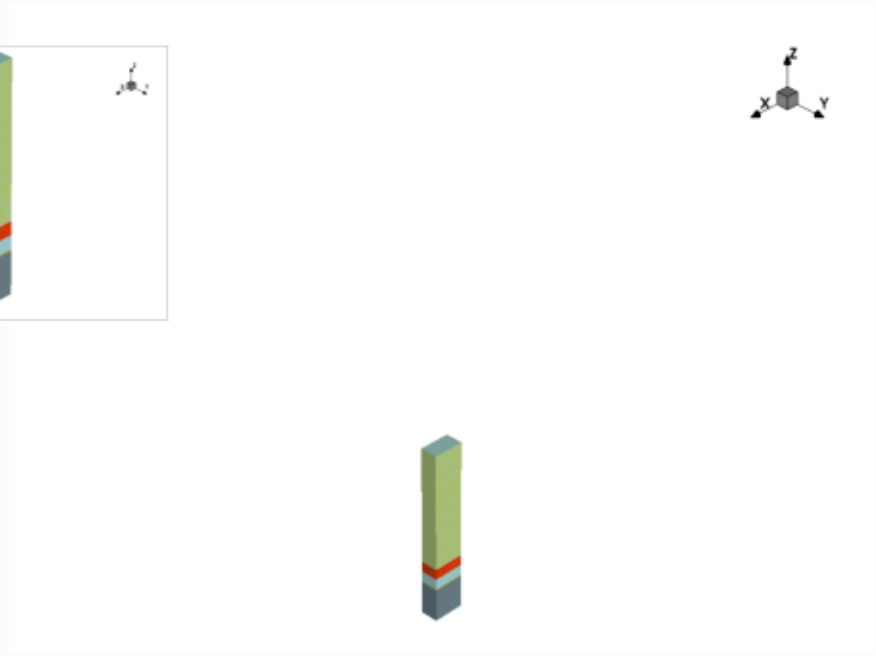

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

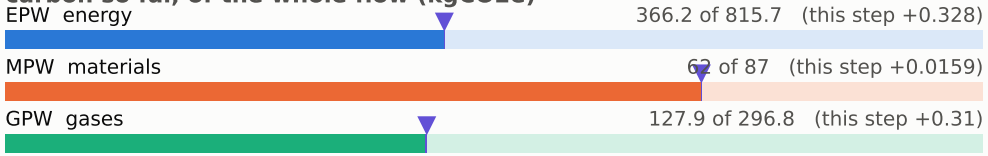

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

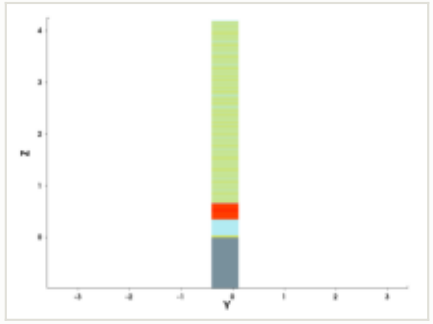

y cut at -0.150 µm

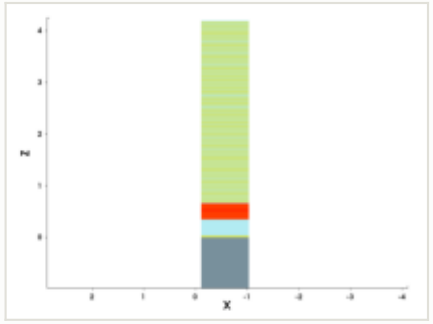

mask for this step

no mask for this step

steps by process area

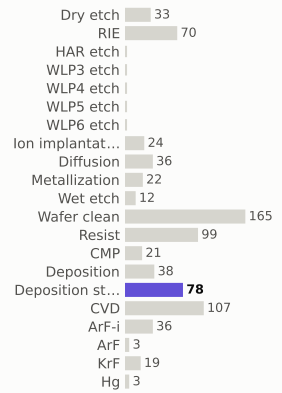

materials deposited (g)

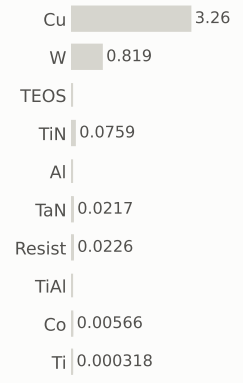

gases emitted (g)

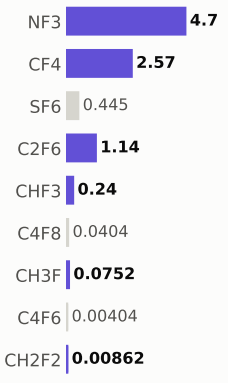

Step #16100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	556.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

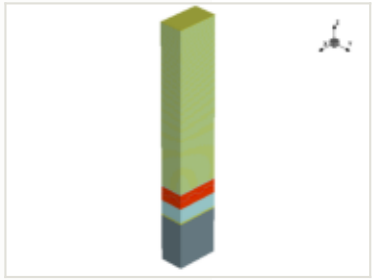

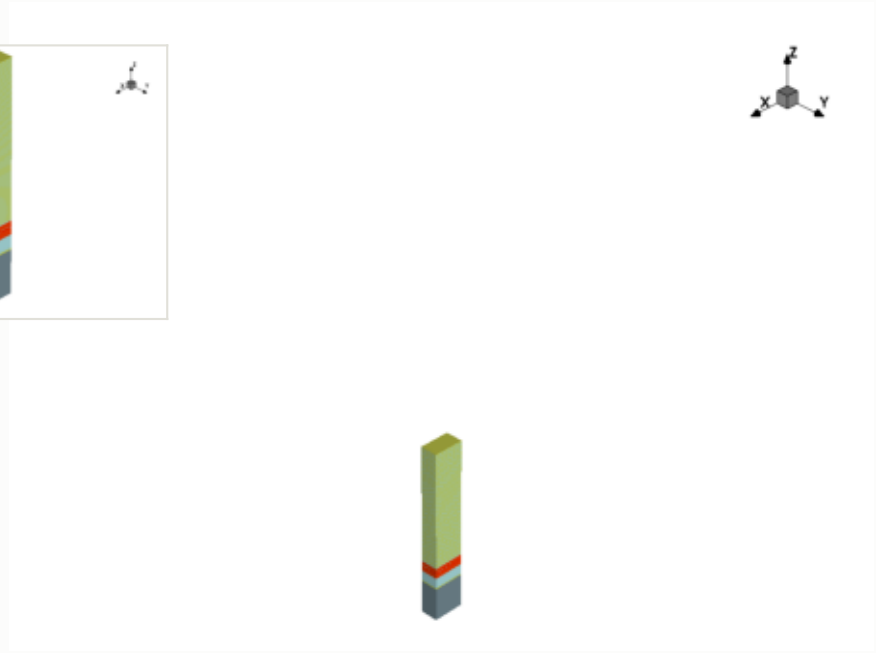

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

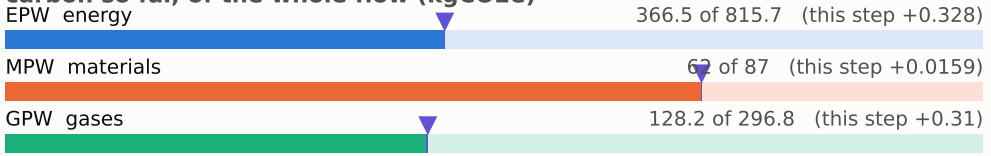

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

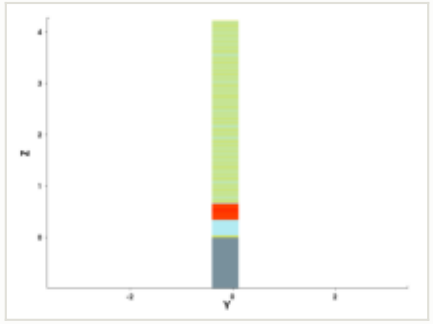

y cut at -0.150 µm

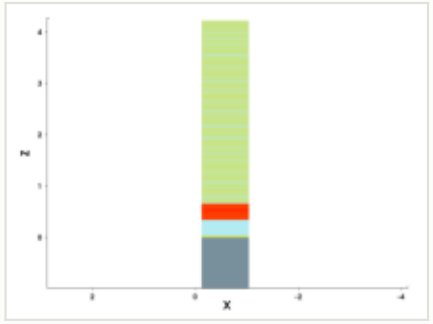

mask for this step

no mask for this step

steps by process area

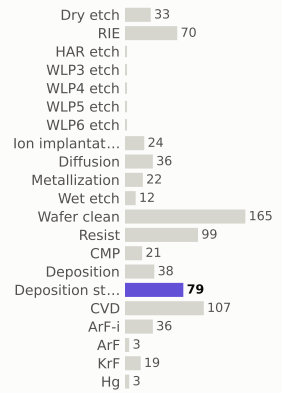

materials deposited (g)

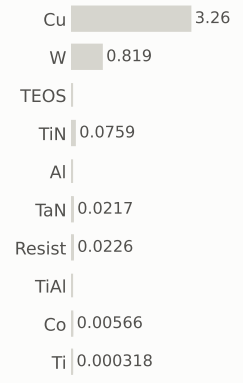

gases emitted (g)

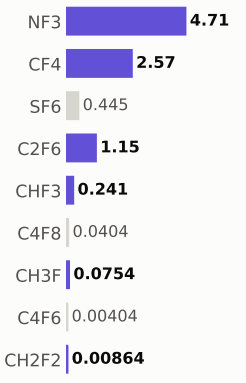

Step #16110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	557.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

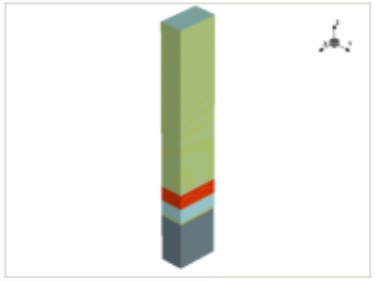

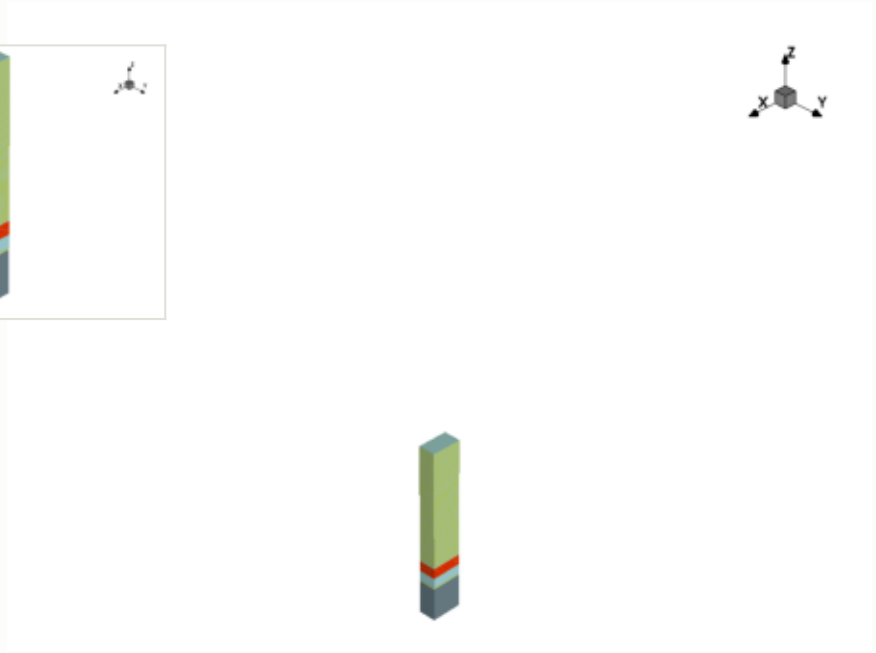

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

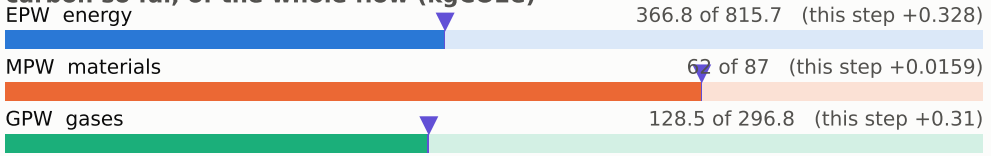

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

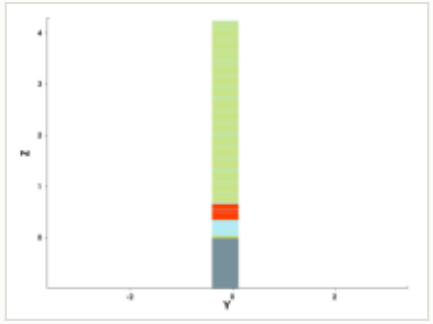

y cut at -0.150 µm

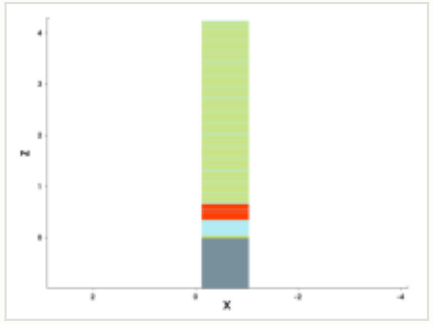

mask for this step

no mask for this step

steps by process area

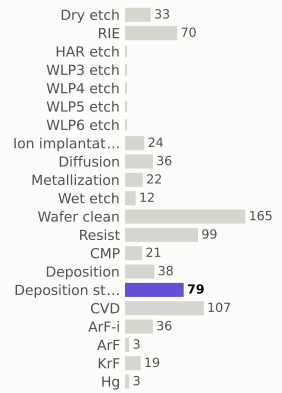

materials deposited (g)

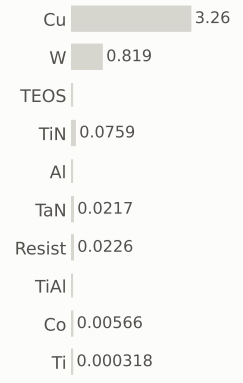

gases emitted (g)

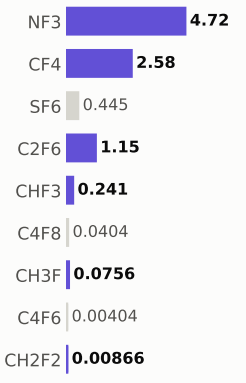

Step #16120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	557.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

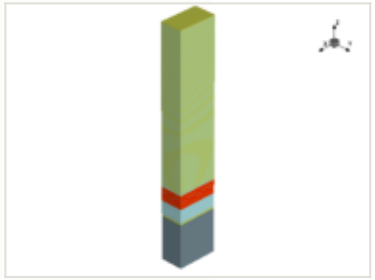

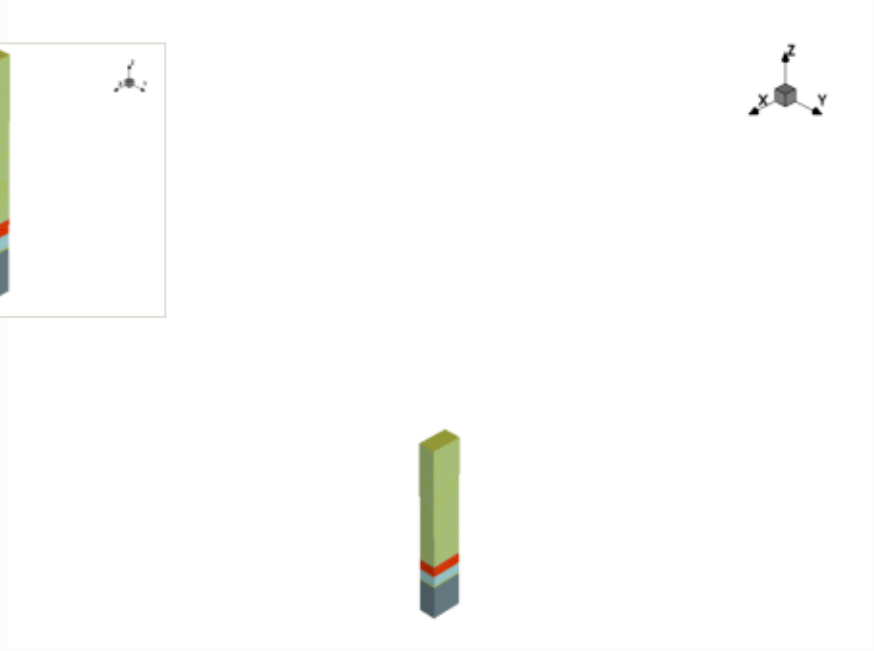

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

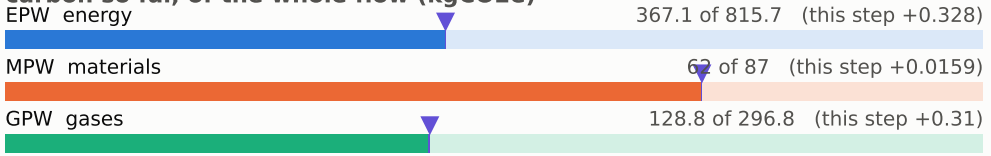

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

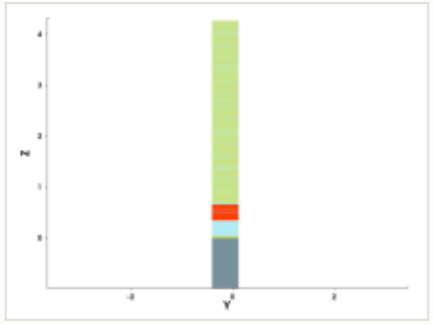

y cut at -0.150 µm

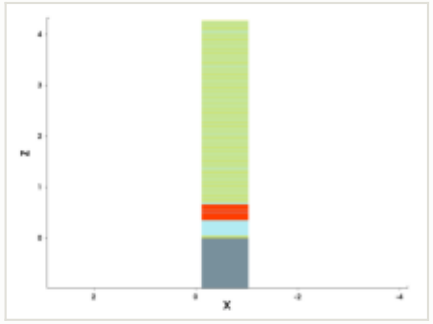

mask for this step

no mask for this step

steps by process area

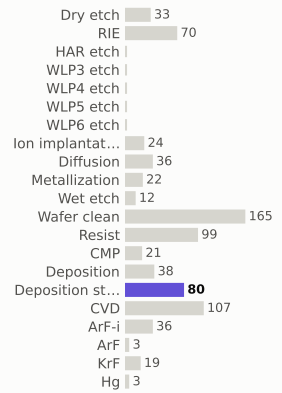

materials deposited (g)

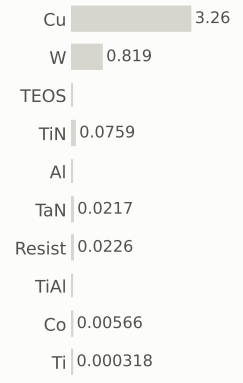

gases emitted (g)

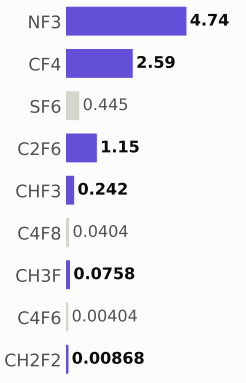

Step #16130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	558.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

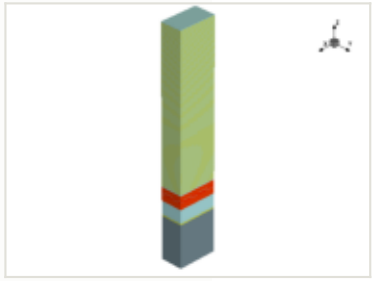

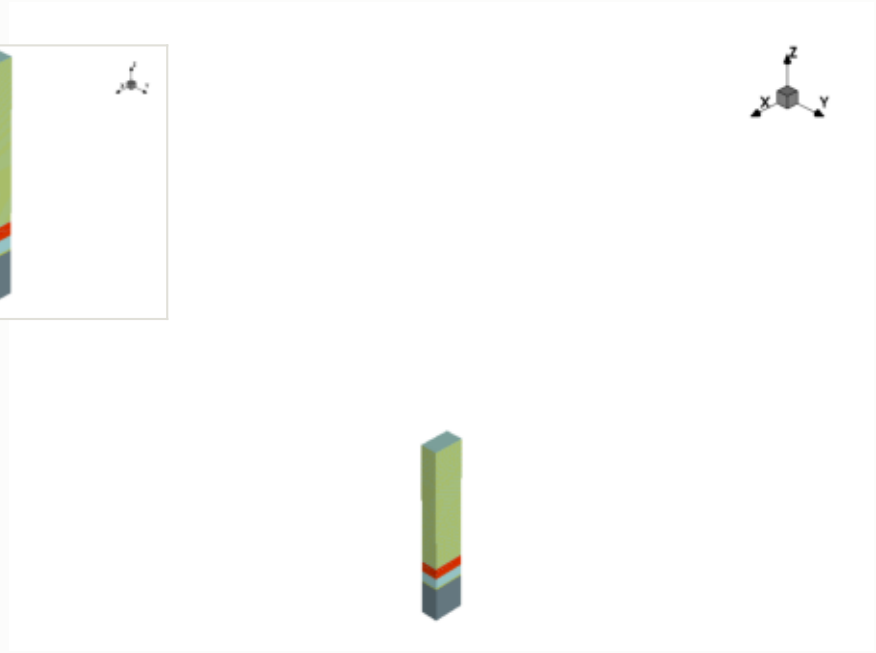

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

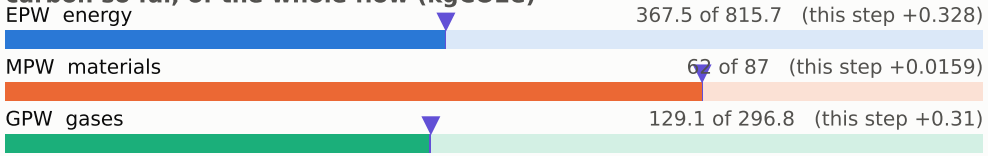

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

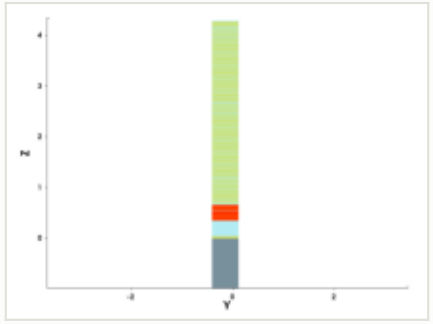

y cut at -0.150 µm

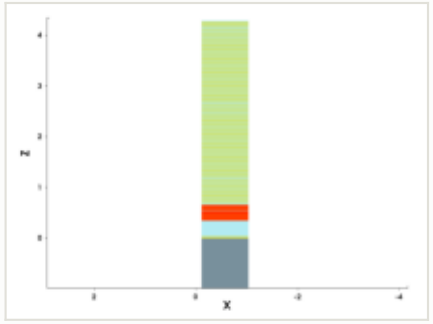

mask for this step

no mask for this step

steps by process area

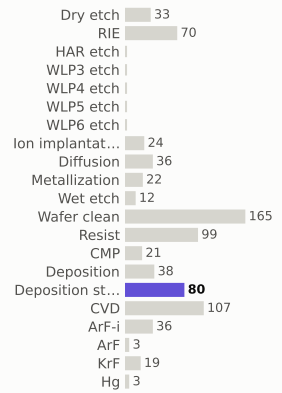

materials deposited (g)

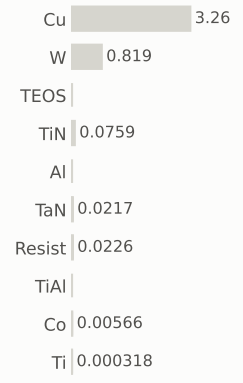

gases emitted (g)

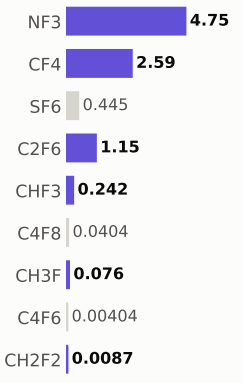

Step #16140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	559.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

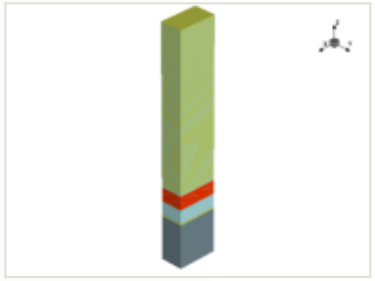

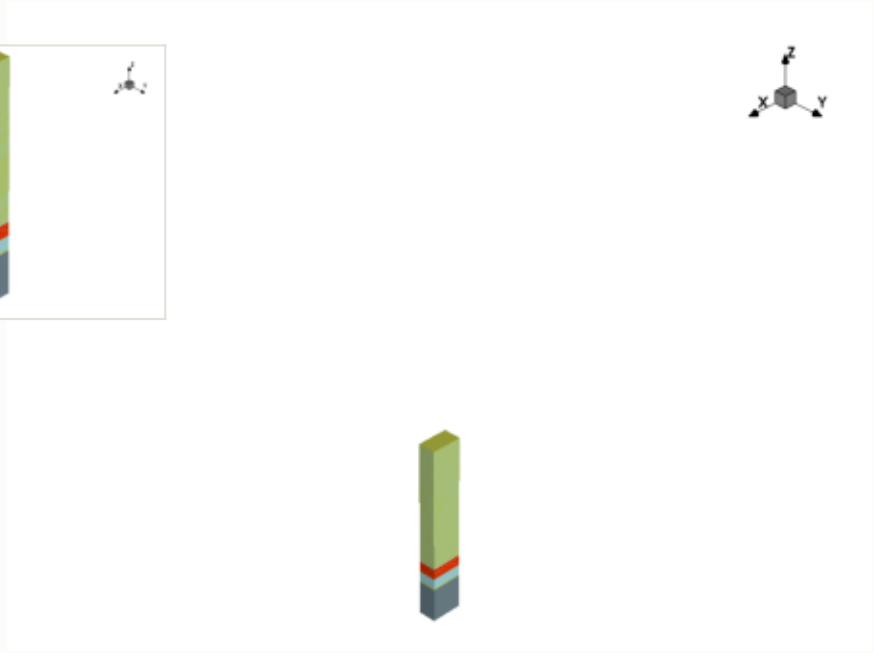

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

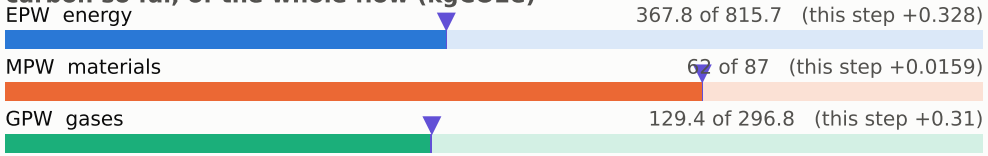

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

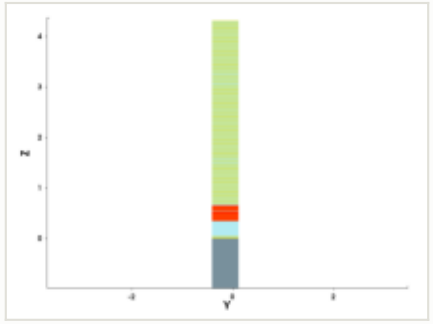

y cut at -0.150 µm

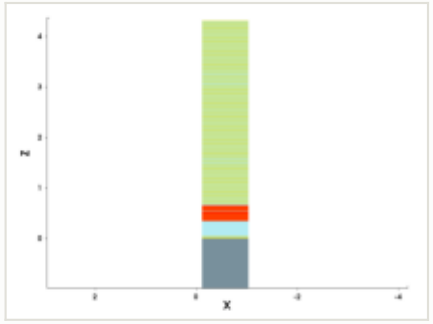

mask for this step

no mask for this step

steps by process area

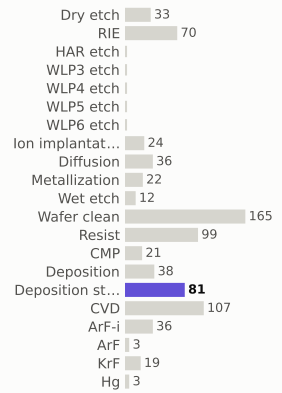

materials deposited (g)

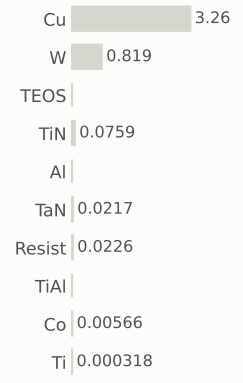

gases emitted (g)

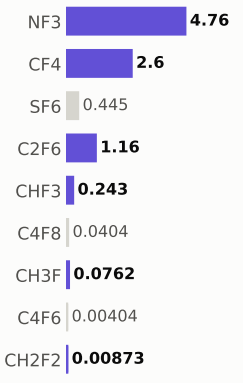

Step #16150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	559.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

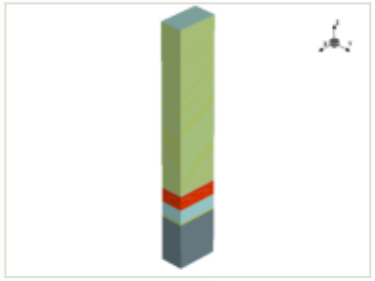

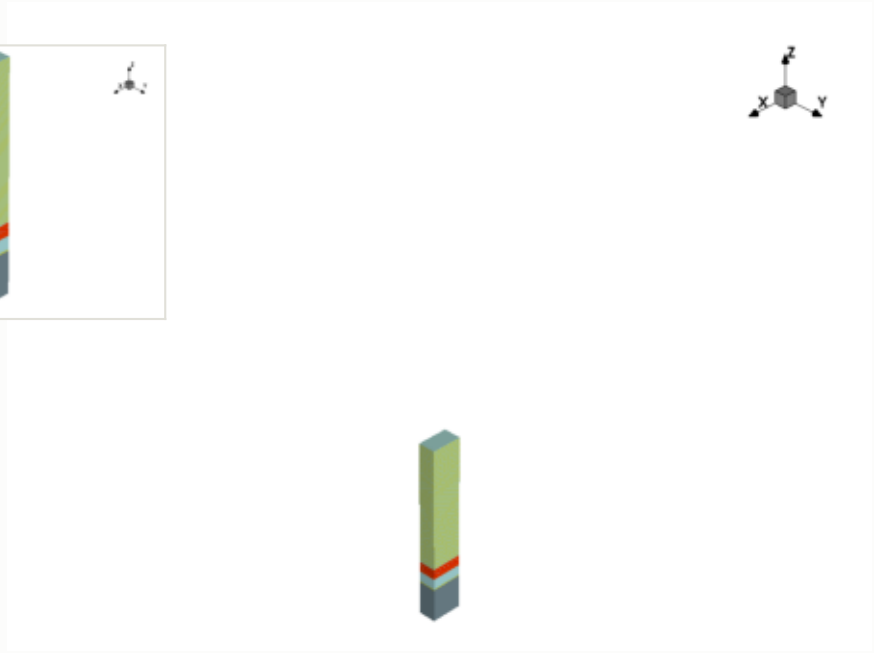

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

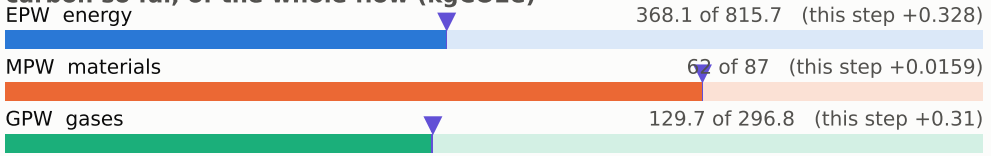

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

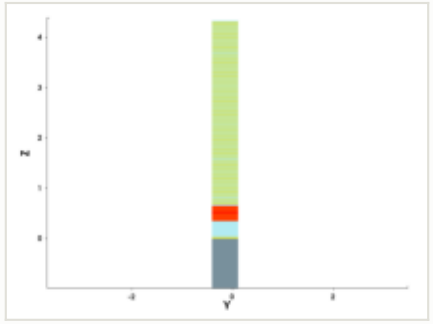

y cut at -0.150 µm

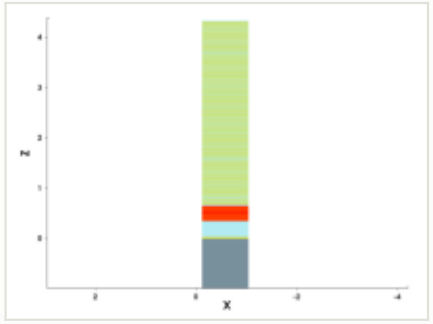

mask for this step

no mask for this step

steps by process area

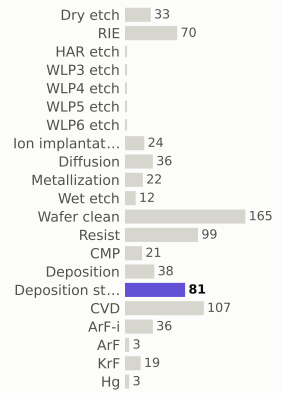

materials deposited (g)

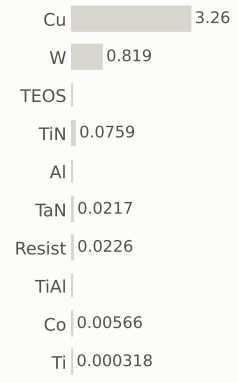

gases emitted (g)

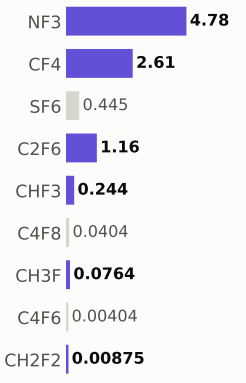

Step #16160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	560.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

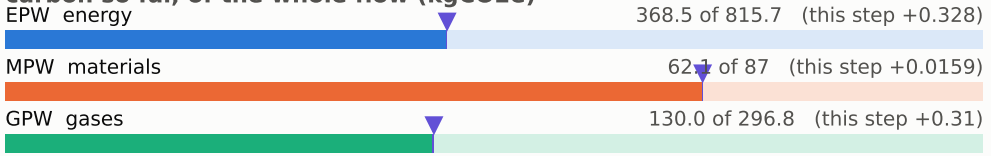

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

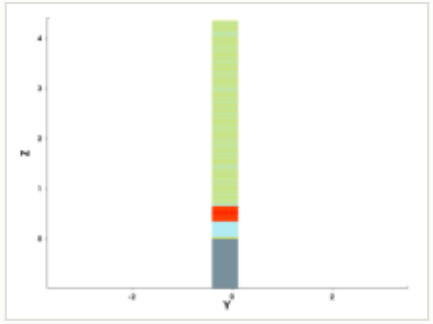

y cut at -0.150 µm

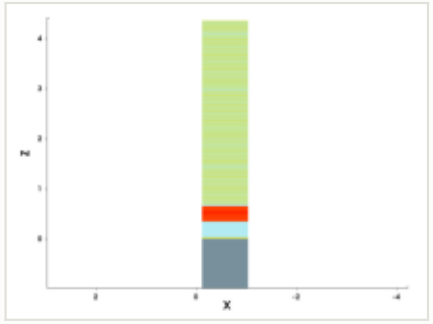

mask for this step

no mask for this step

steps by process area

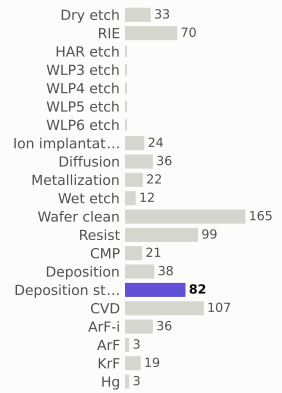

materials deposited (g)

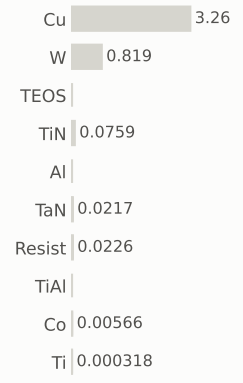

gases emitted (g)

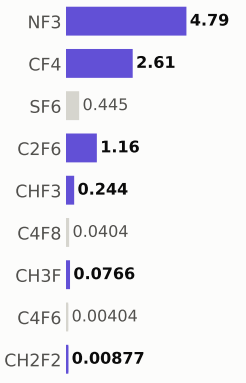

Step #16170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	561.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

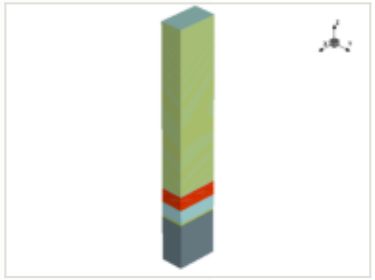

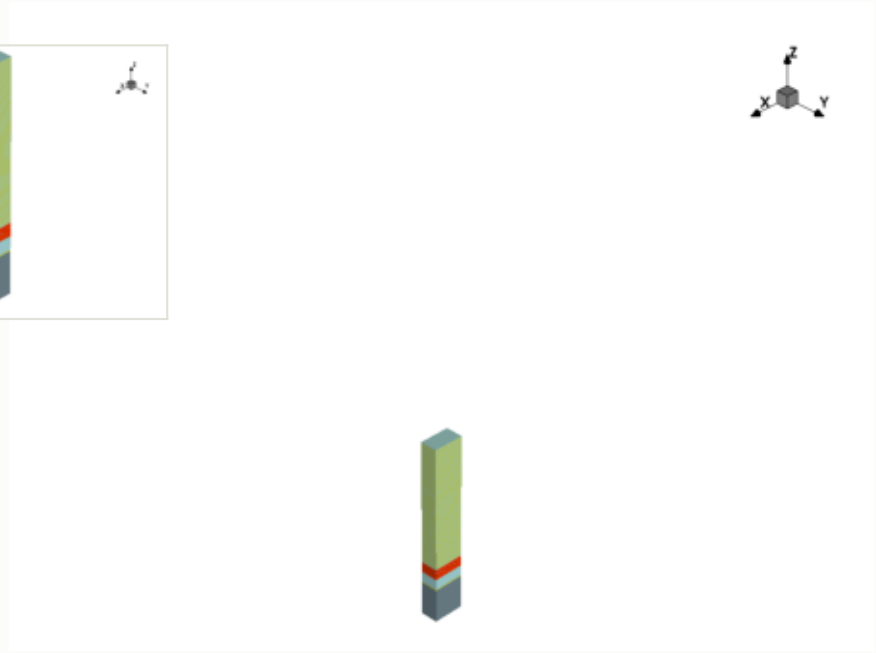

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

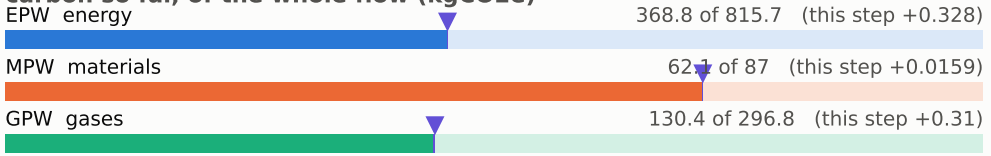

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

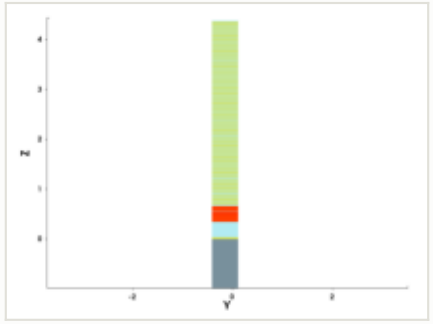

y cut at -0.150 µm

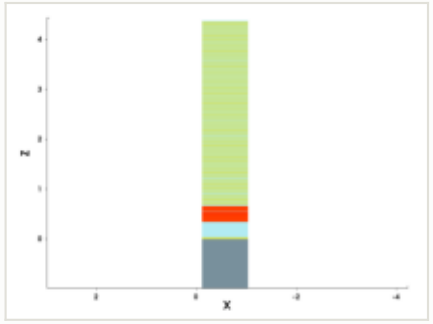

mask for this step

no mask for this step

steps by process area

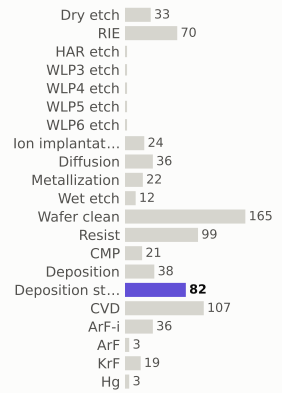

materials deposited (g)

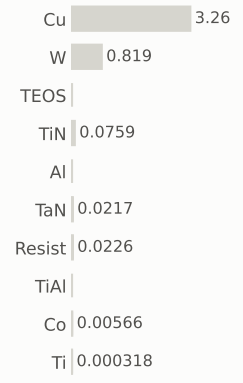

gases emitted (g)

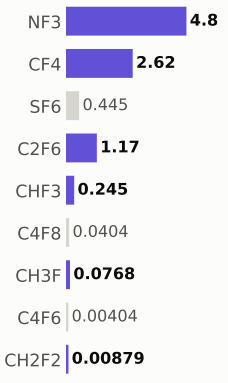

Step #16180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	561.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

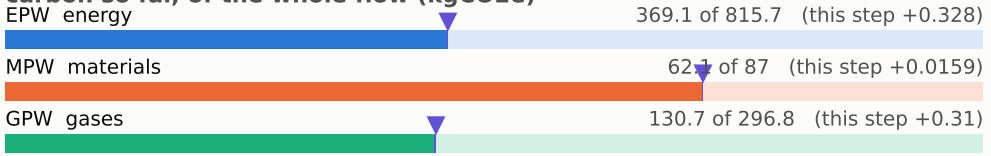

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

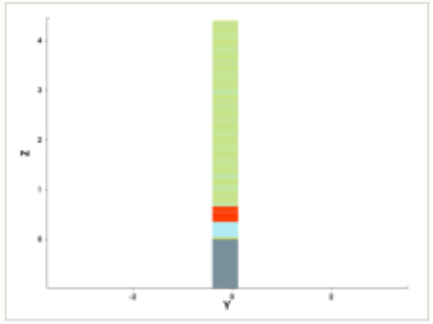

y cut at -0.150 µm

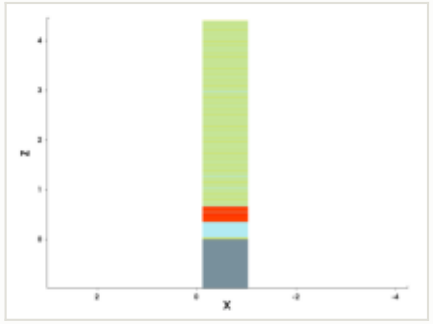

mask for this step

no mask for this step

steps by process area

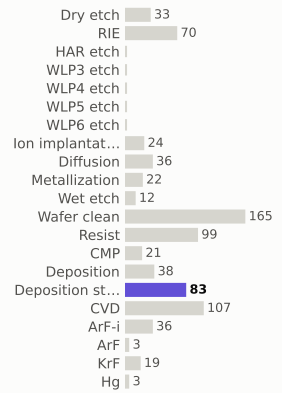

materials deposited (g)

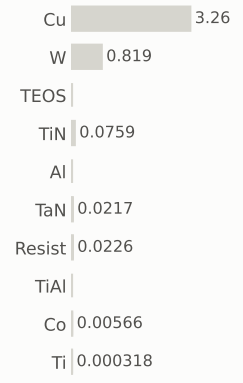

gases emitted (g)

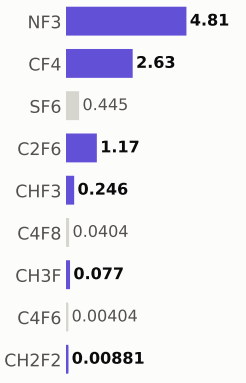

Step #16190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	562.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

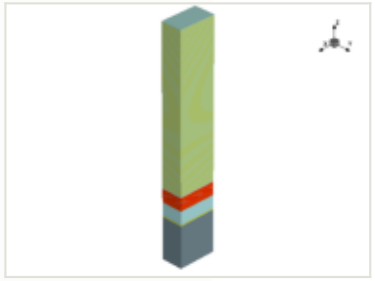

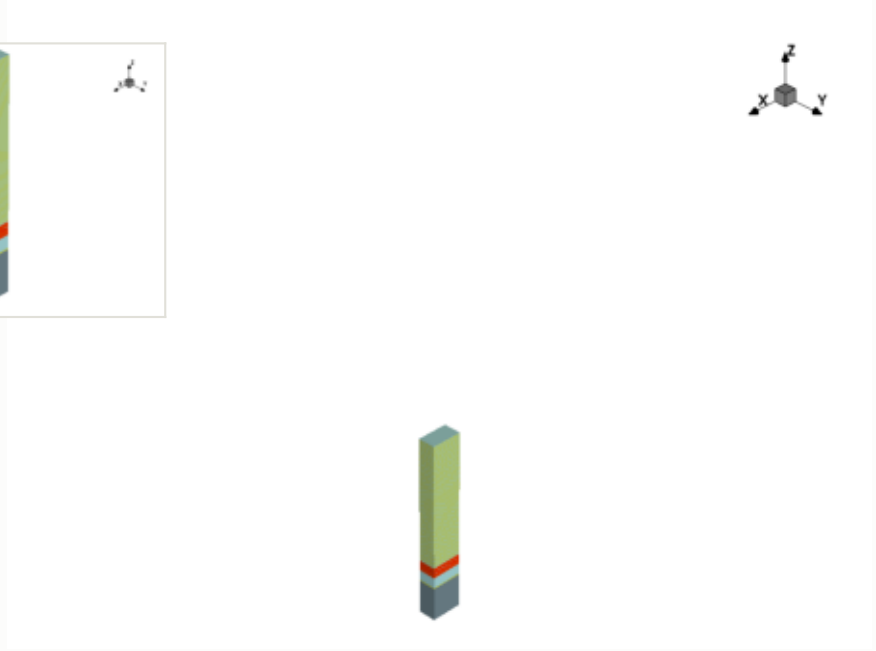

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

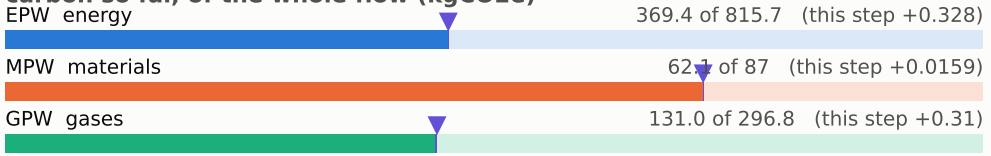

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

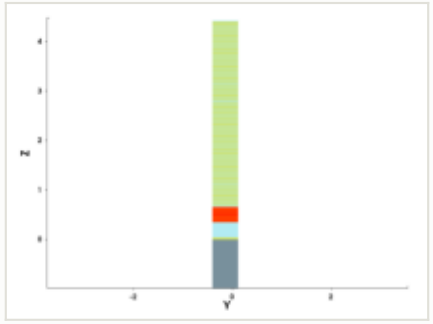

y cut at -0.150 µm

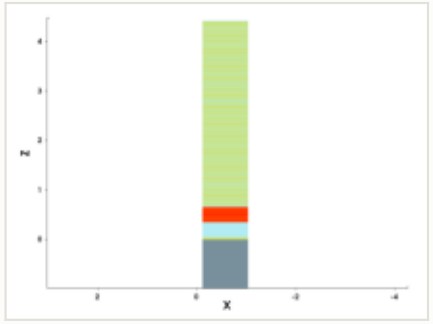

mask for this step

no mask for this step

steps by process area

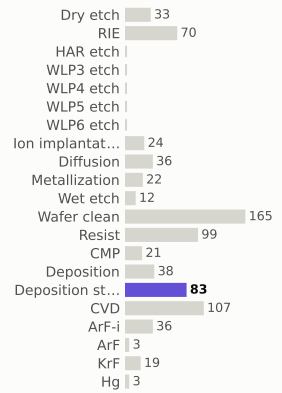

materials deposited (g)

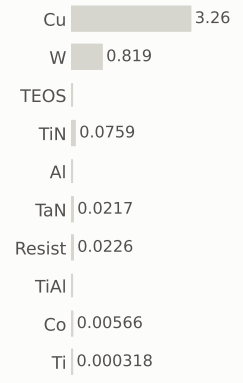

gases emitted (g)

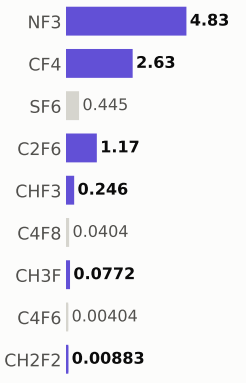

Step #16200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	563.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

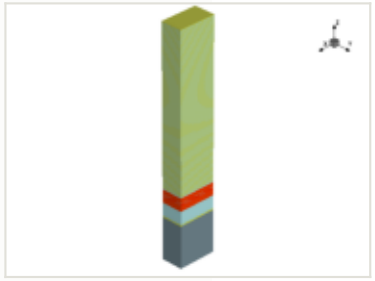

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 369.8 of 815.7 (this step +0.328)

MPW materials — 62.1 of 87 (this step +0.0159)

GPW gases — 131.3 of 296.8 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

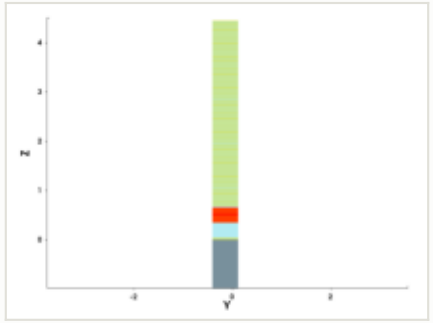

y cut at -0.150 µm

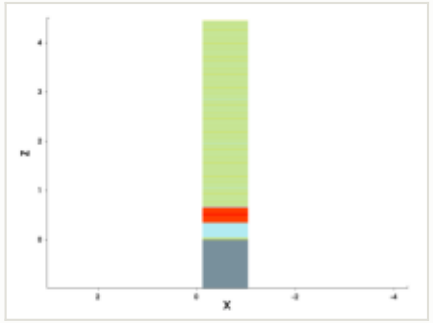

mask for this step

no mask for this step

steps by process area

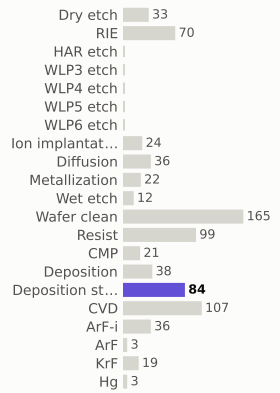

materials deposited (g)

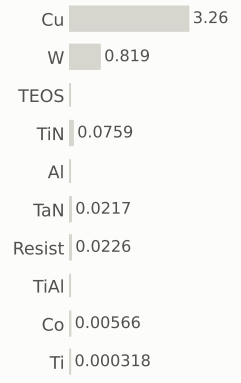

gases emitted (g)

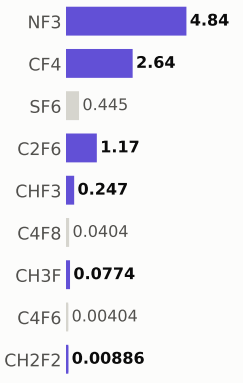

Step #16210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	563.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

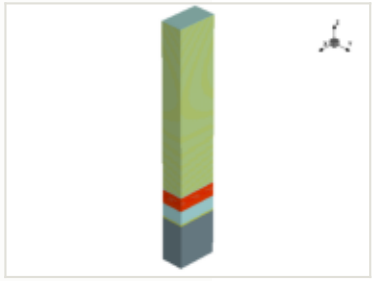

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

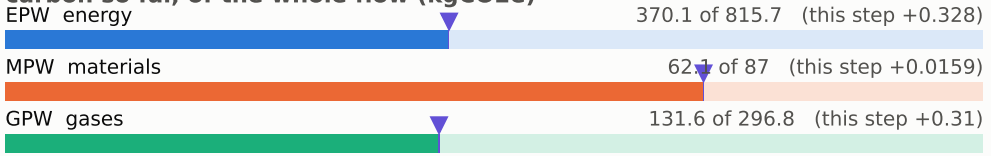

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

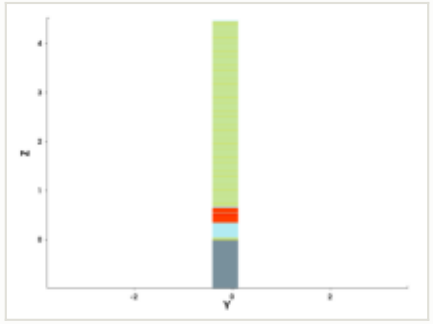

y cut at -0.150 µm

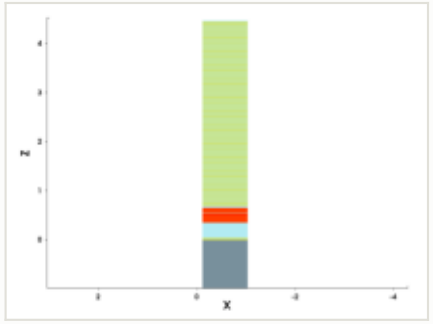

mask for this step

no mask for this step

steps by process area

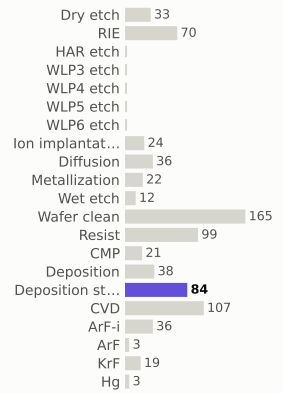

materials deposited (g)

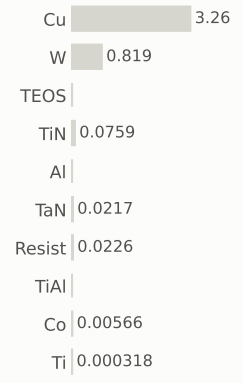

gases emitted (g)

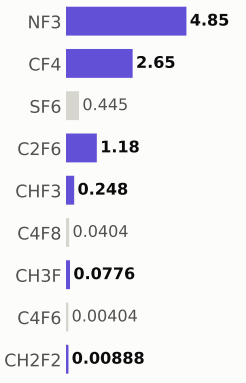

Step #16220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	564.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

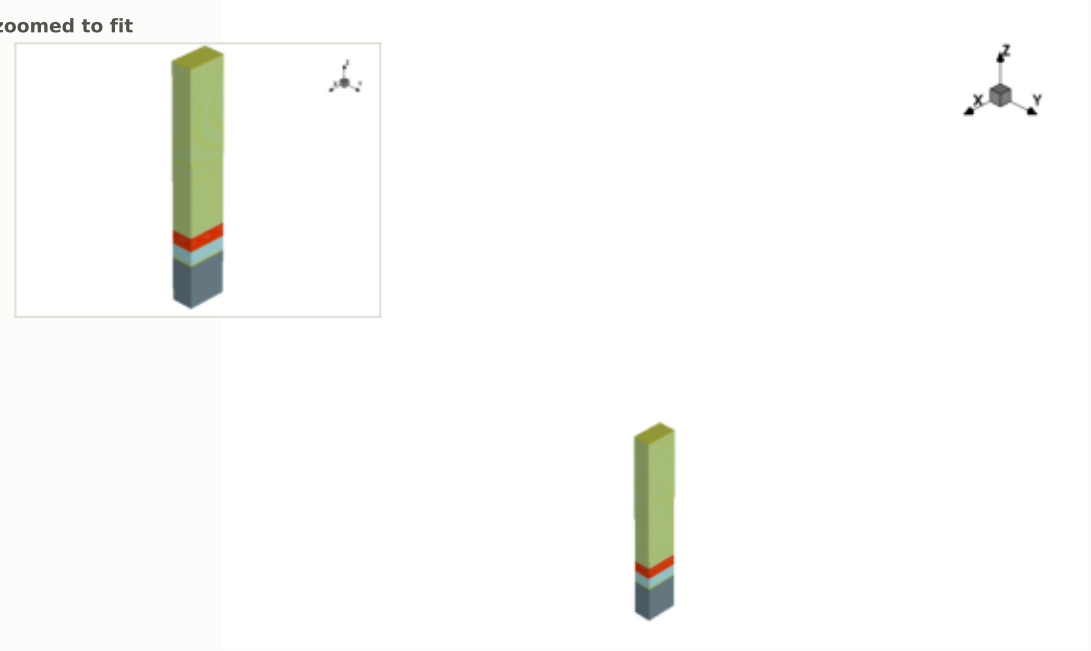

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

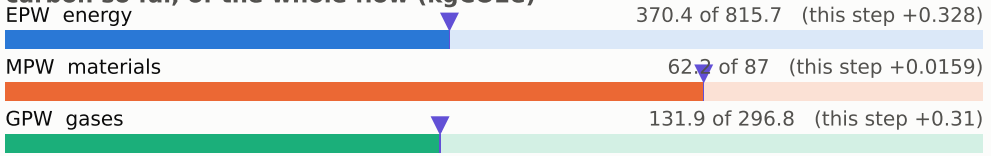

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

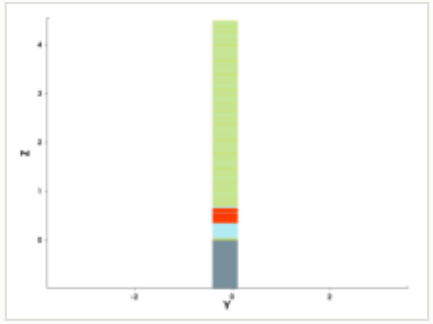

y cut at -0.150 µm

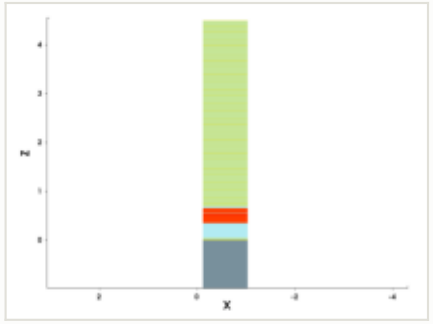

mask for this step

no mask for this step

steps by process area

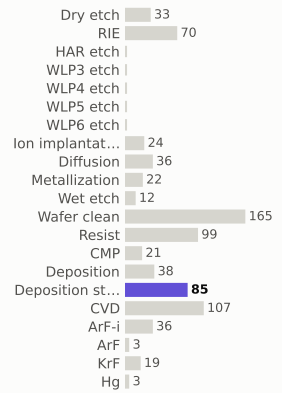

materials deposited (g)

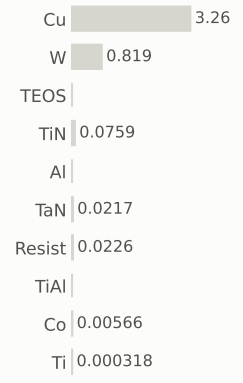

gases emitted (g)

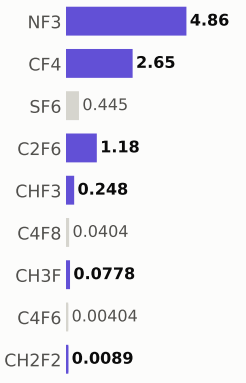

Step #16230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	565.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

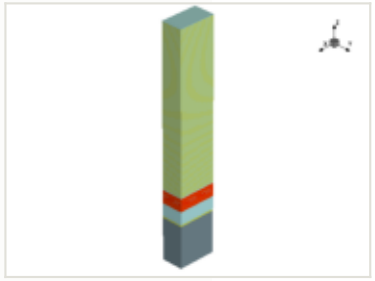

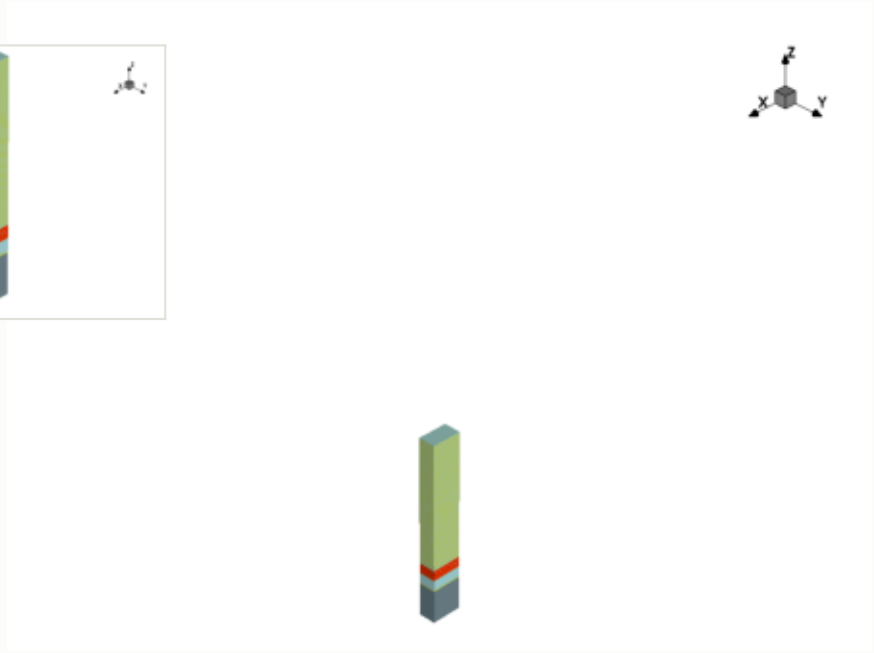

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

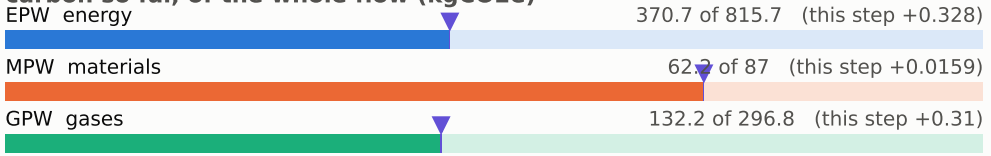

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

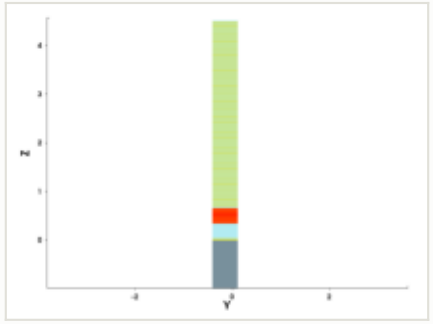

y cut at -0.150 µm

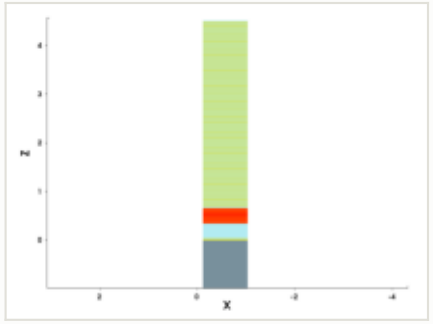

mask for this step

no mask for this step

steps by process area

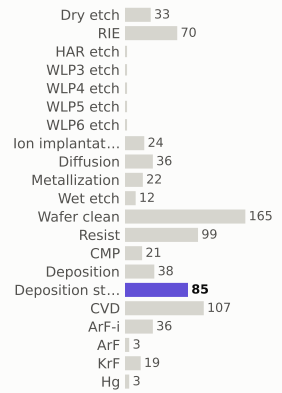

materials deposited (g)

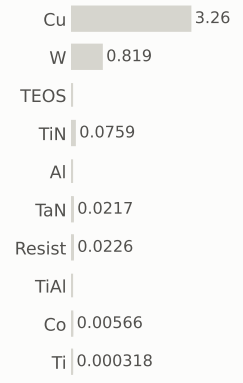

gases emitted (g)

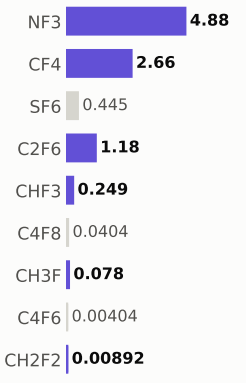

Step #16240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	565.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

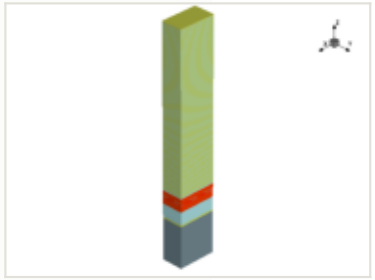

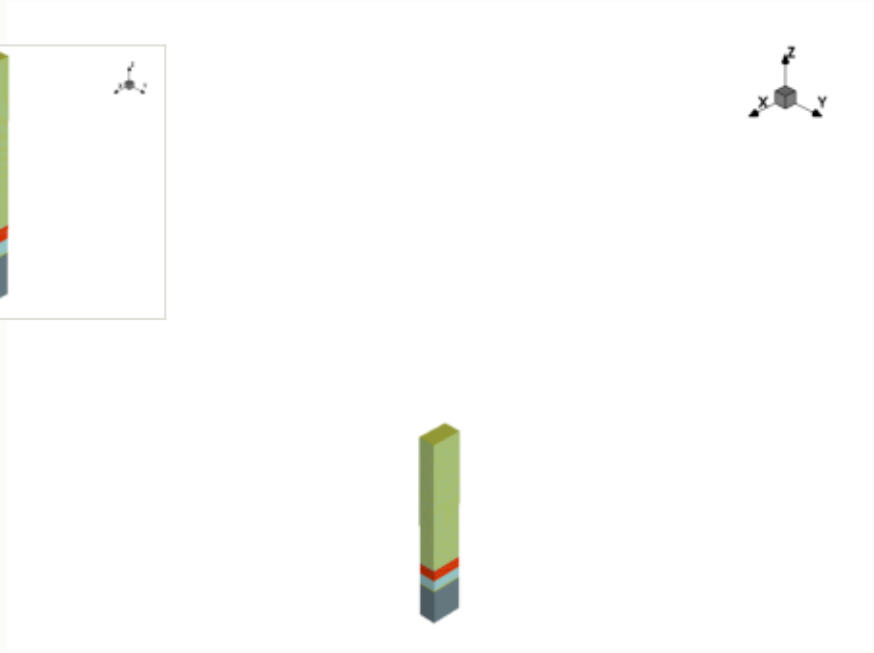

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

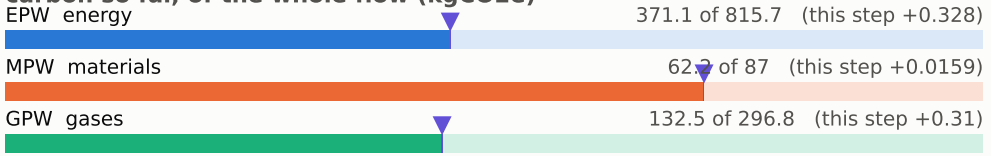

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

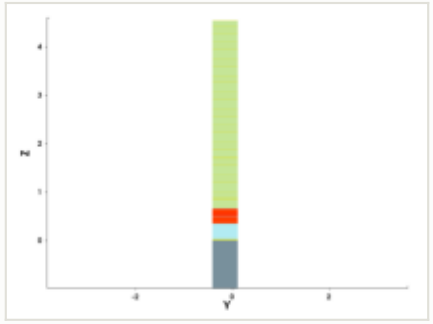

y cut at -0.150 µm

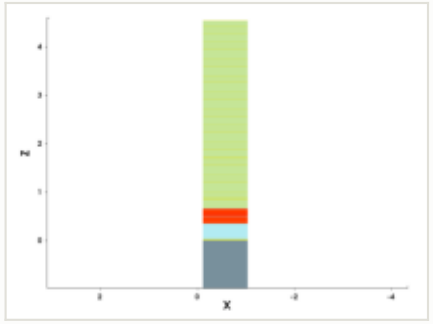

mask for this step

no mask for this step

steps by process area

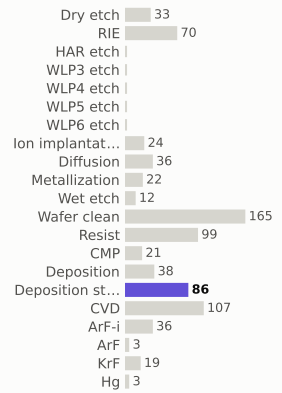

materials deposited (g)

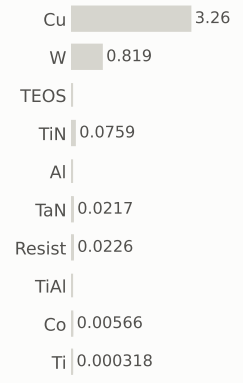

gases emitted (g)

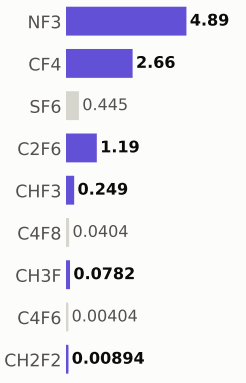

Step #16250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	566.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

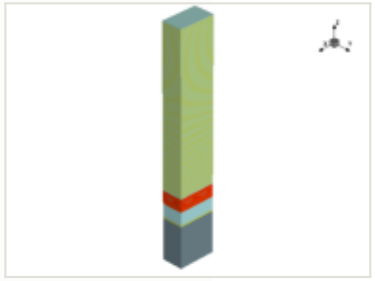

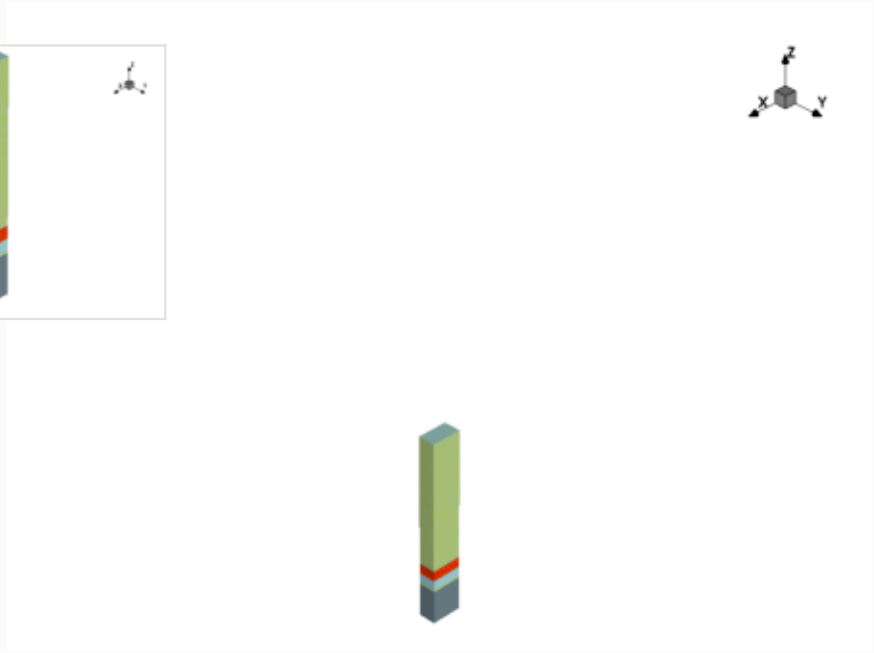

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

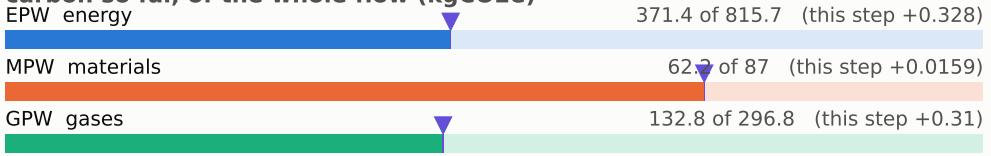

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

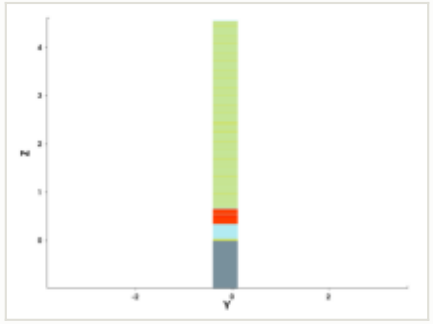

y cut at -0.150 µm

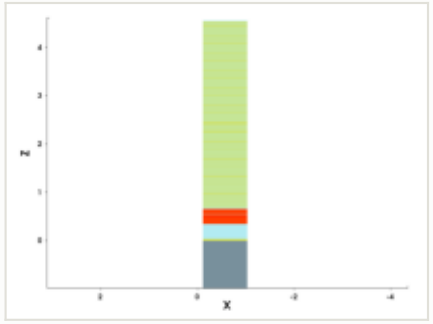

mask for this step

no mask for this step

steps by process area

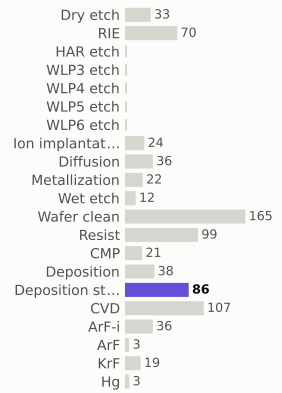

materials deposited (g)

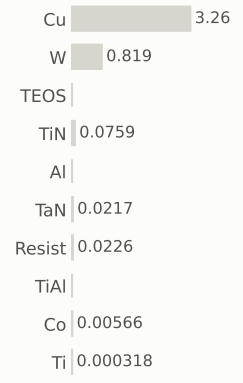

gases emitted (g)

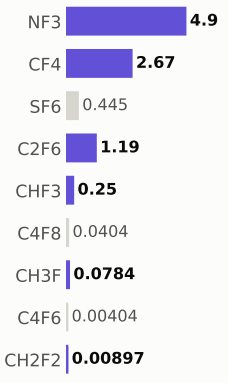

Step #16260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	567.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

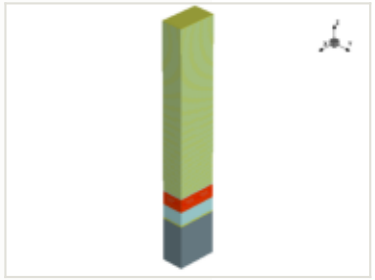

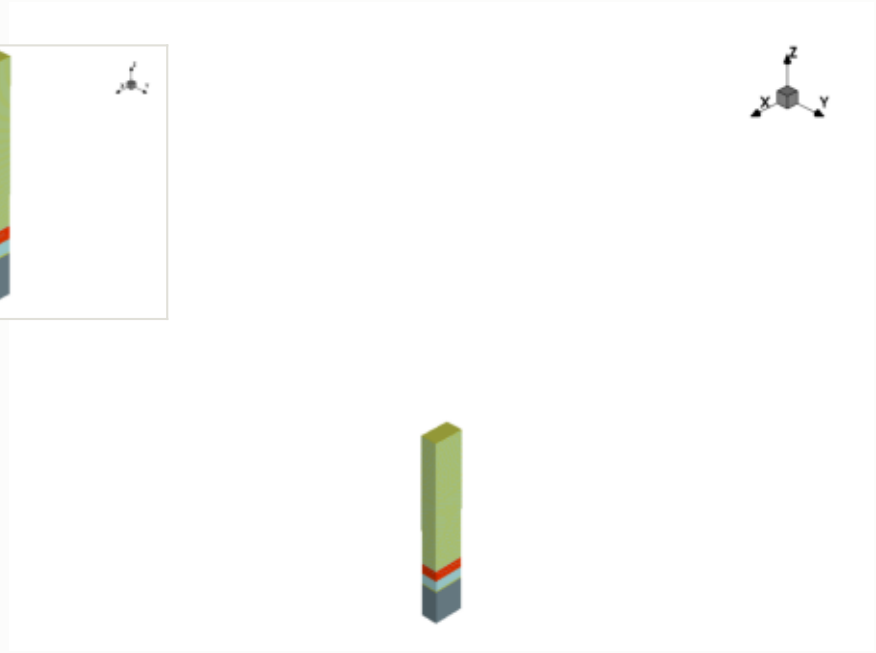

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

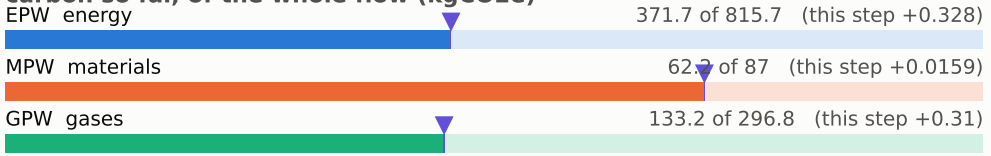

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

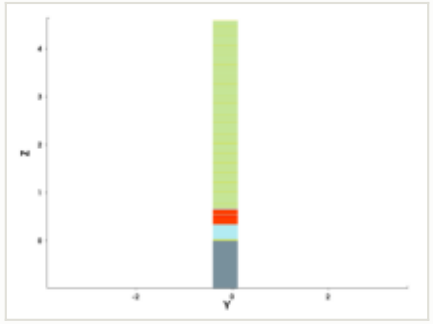

y cut at -0.150 µm

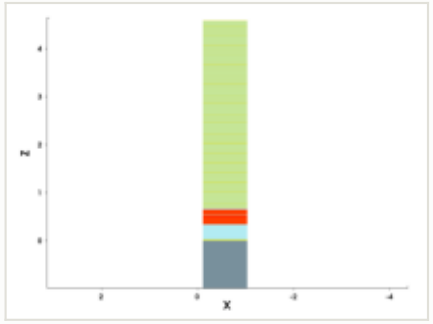

mask for this step

no mask for this step

steps by process area

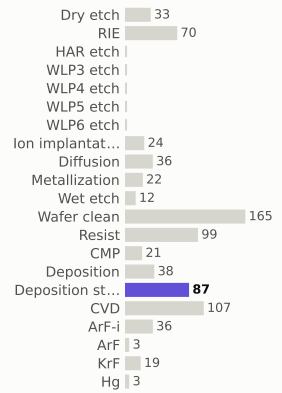

materials deposited (g)

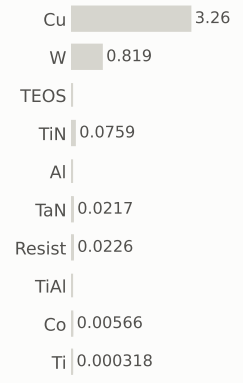

gases emitted (g)

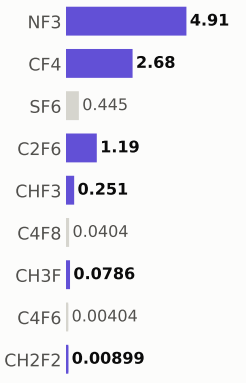

Step #16270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	567.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

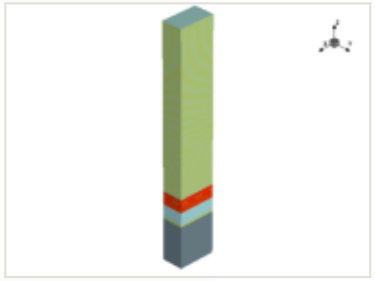

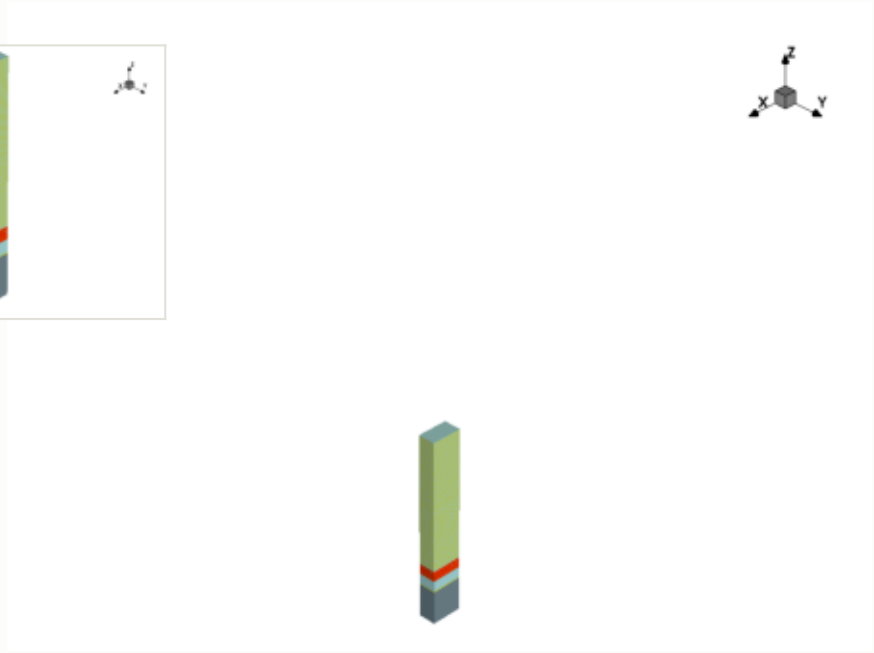

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

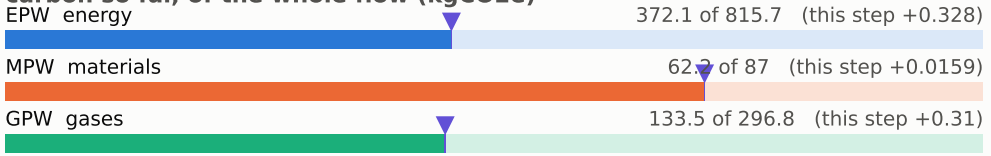

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

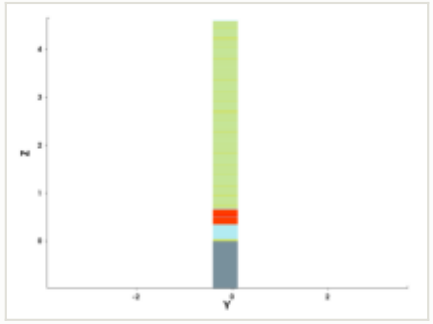

y cut at -0.150 µm

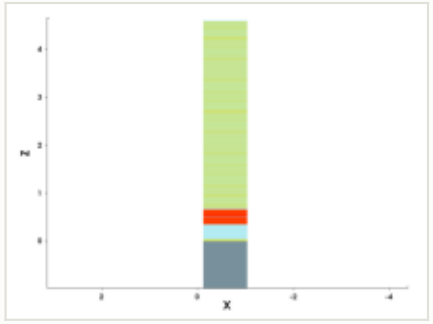

mask for this step

no mask for this step

steps by process area

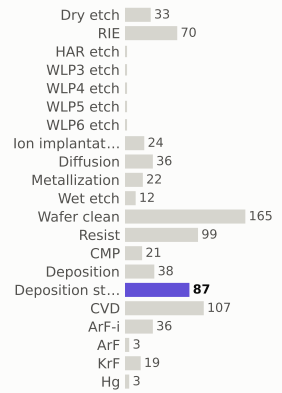

materials deposited (g)

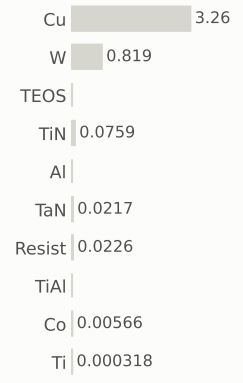

gases emitted (g)

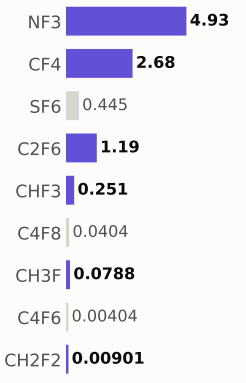

Step #16280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	568.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

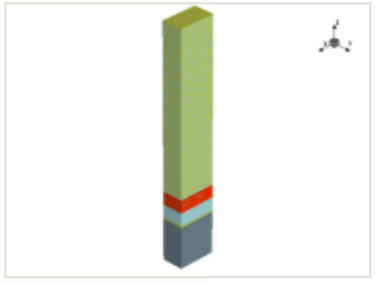

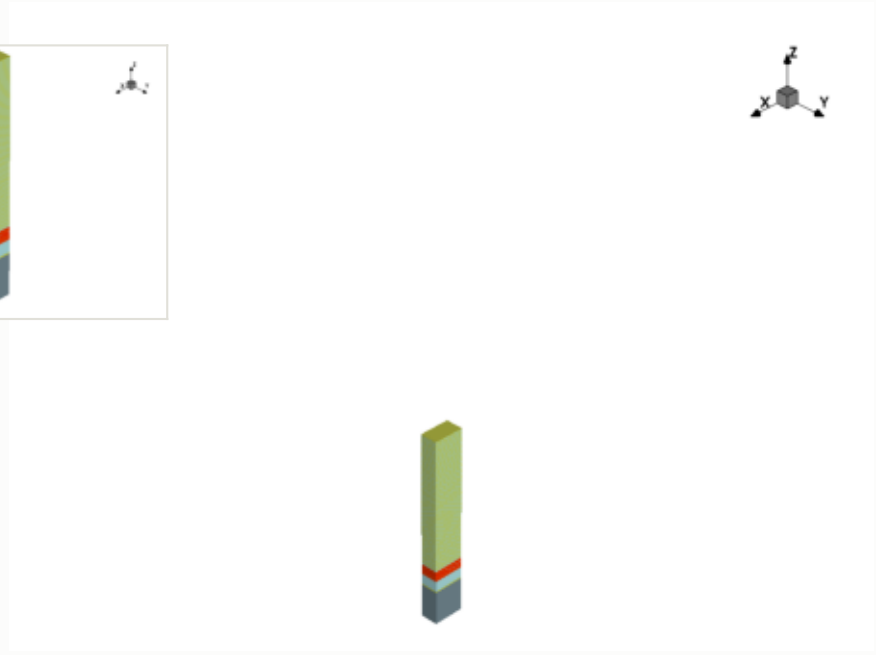

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

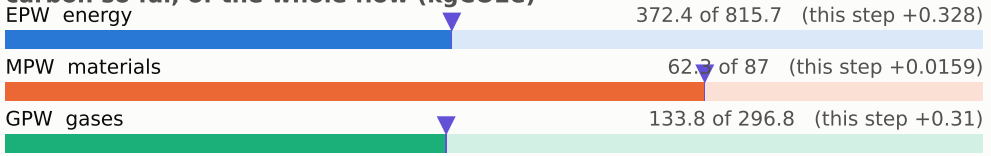

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

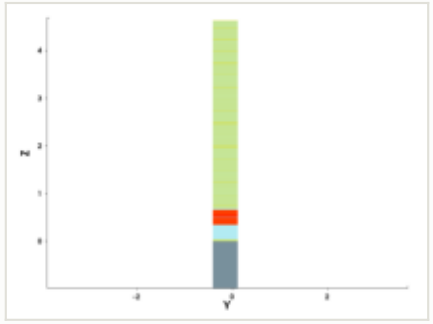

y cut at -0.150 µm

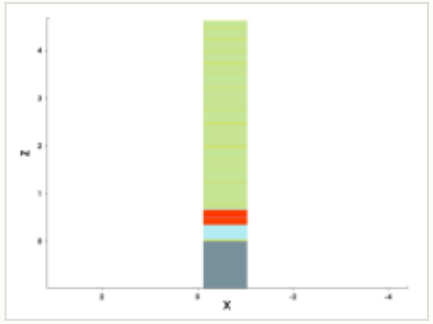

mask for this step

no mask for this step

steps by process area

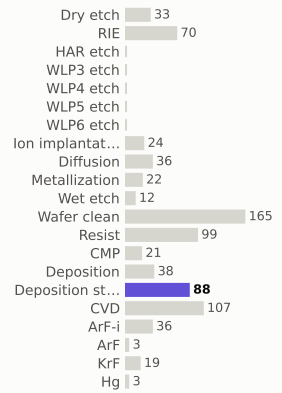

materials deposited (g)

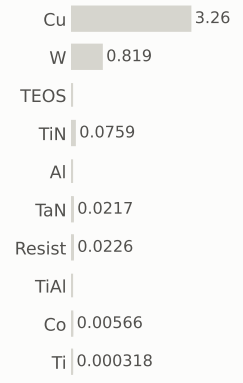

gases emitted (g)

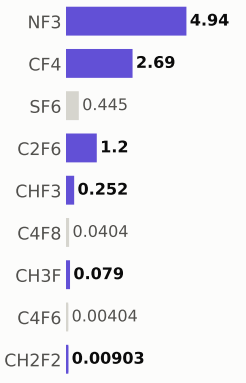

Step #16290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	569.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

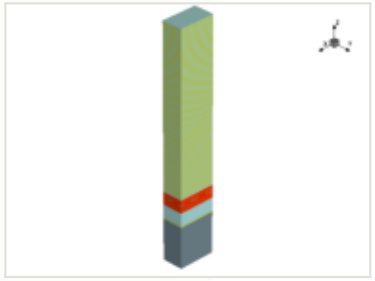

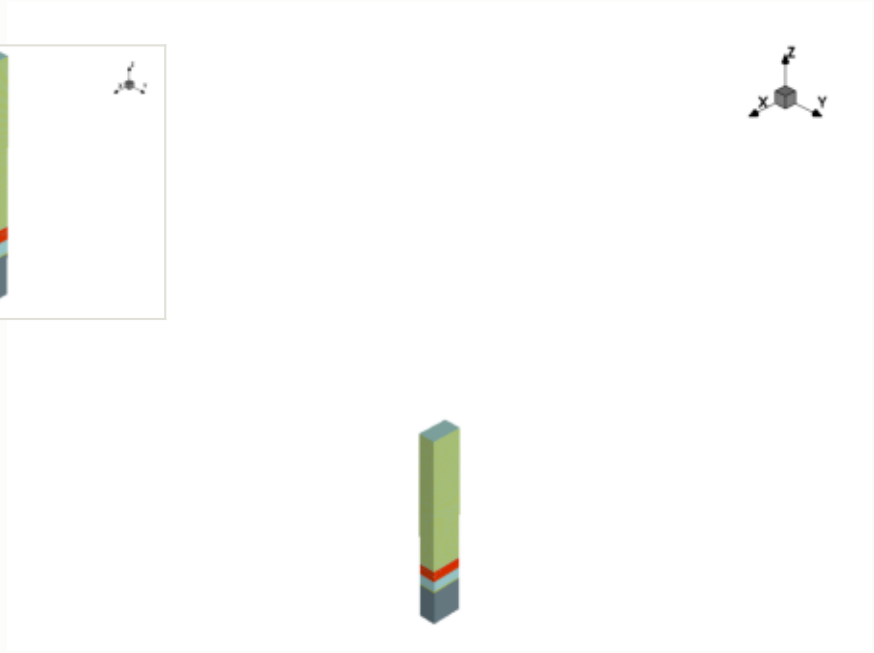

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

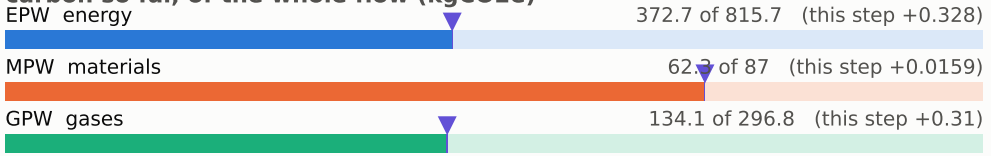

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

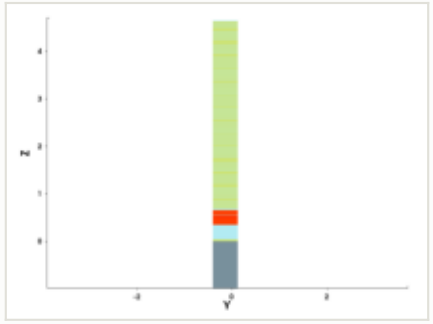

y cut at -0.150 µm

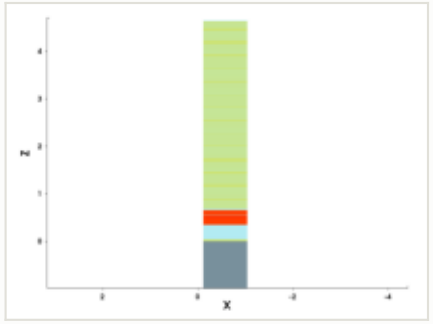

mask for this step

no mask for this step

steps by process area

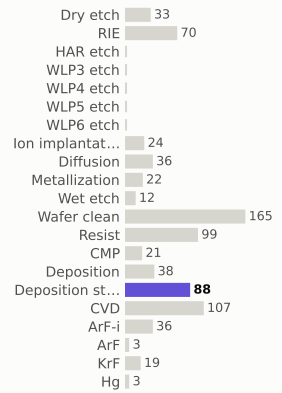

materials deposited (g)

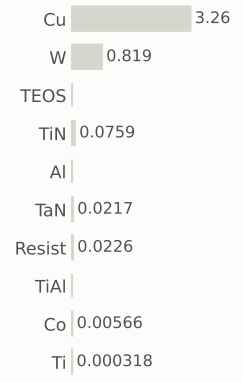

gases emitted (g)

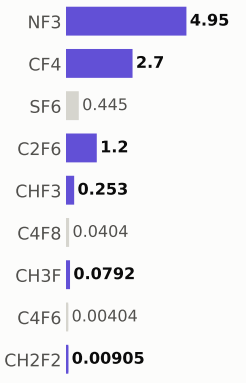

Step #16300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	569.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

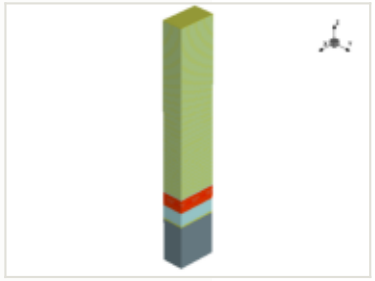

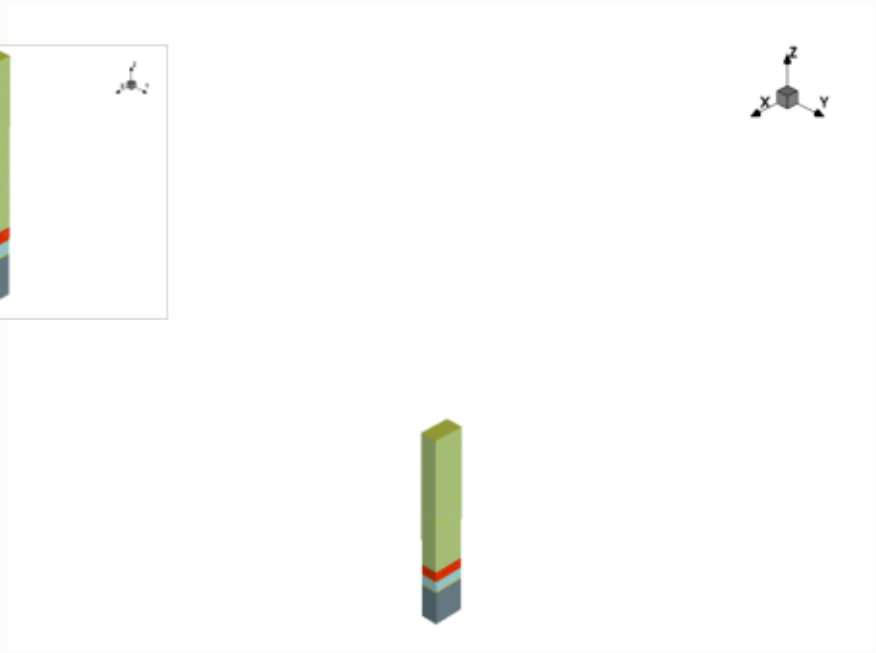

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

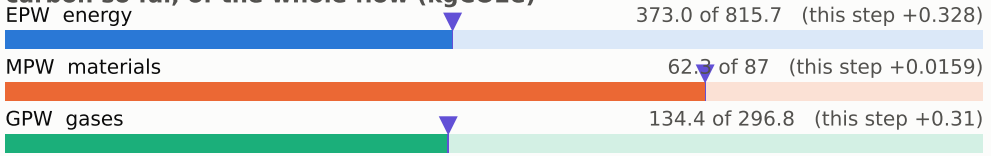

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

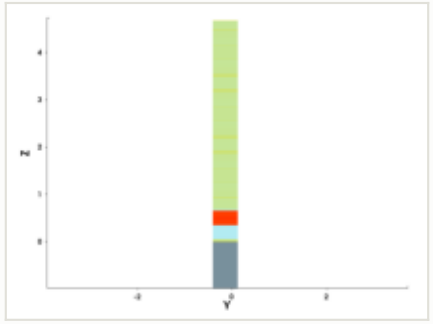

y cut at -0.150 µm

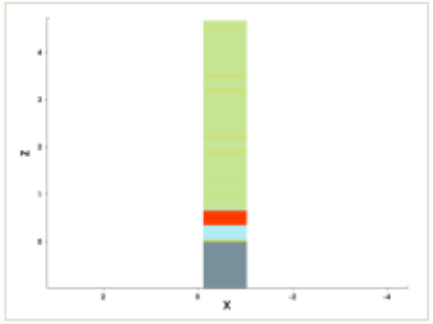

mask for this step

no mask for this step

steps by process area

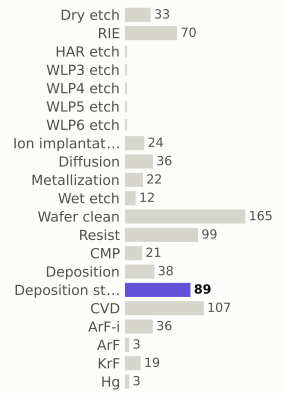

materials deposited (g)

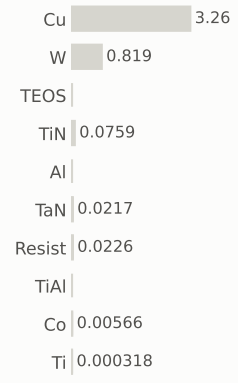

gases emitted (g)

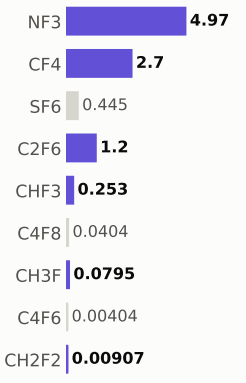

Step #16310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	570.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

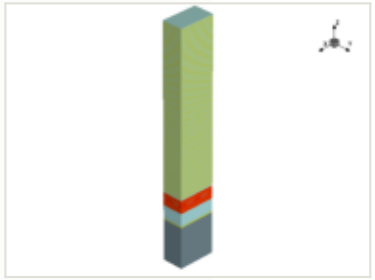

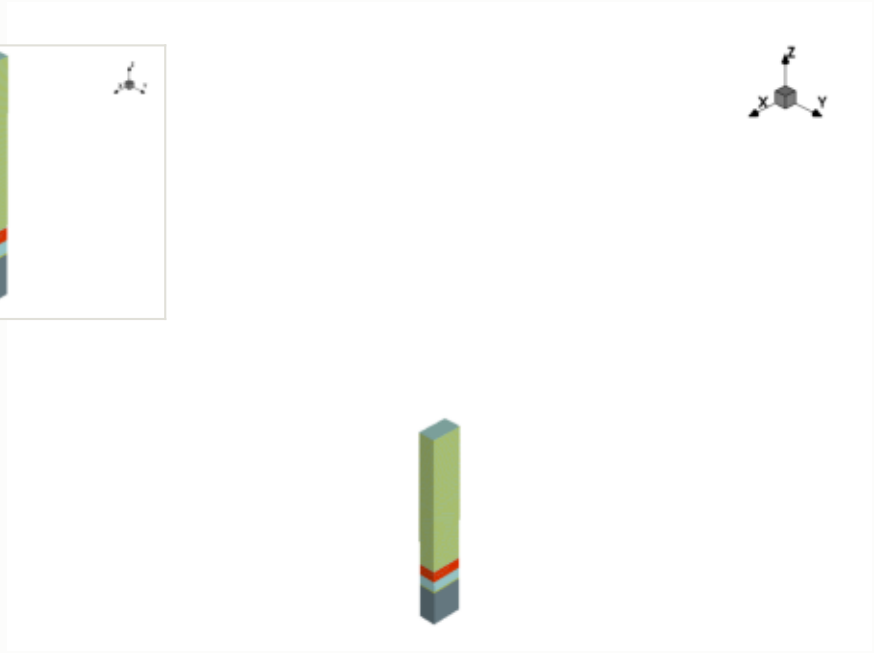

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

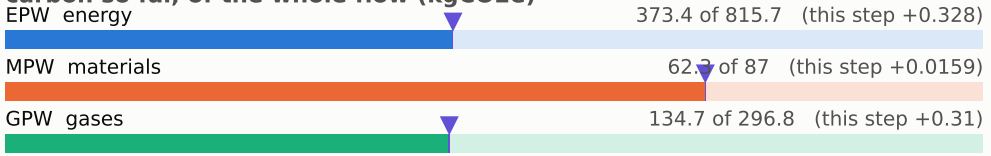

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

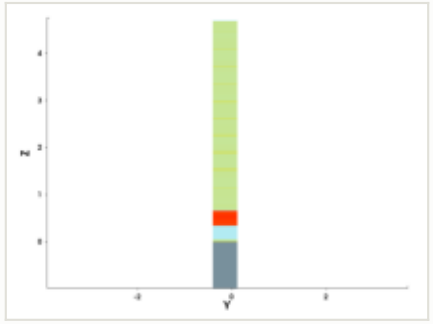

y cut at -0.150 µm

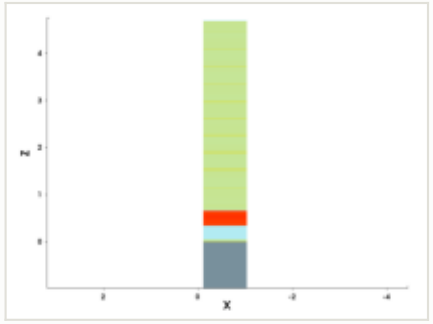

mask for this step

no mask for this step

steps by process area

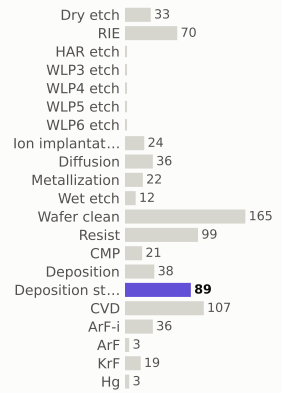

materials deposited (g)

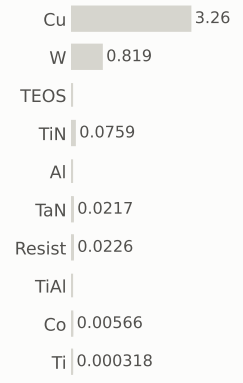

gases emitted (g)

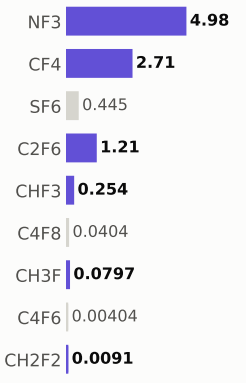

Step #16320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	571.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

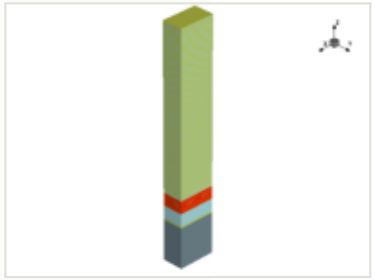

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

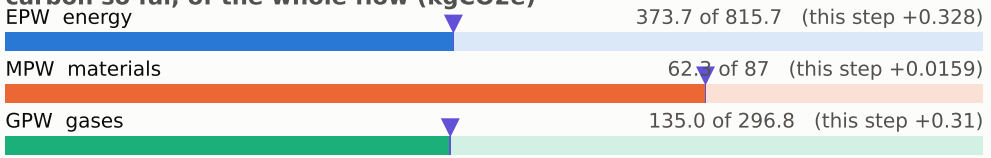

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

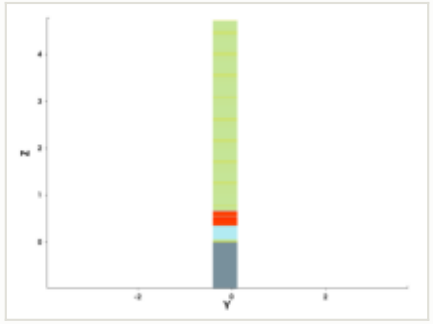

y cut at -0.150 µm

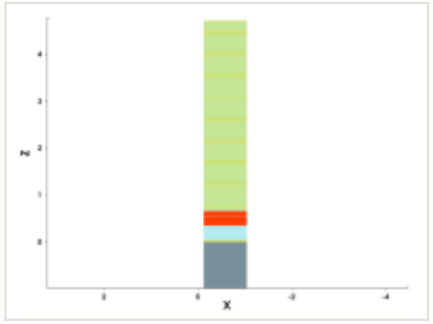

mask for this step

no mask for this step

steps by process area

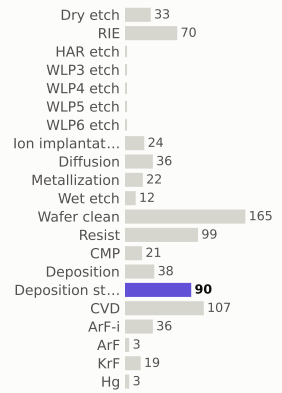

materials deposited (g)

gases emitted (g)

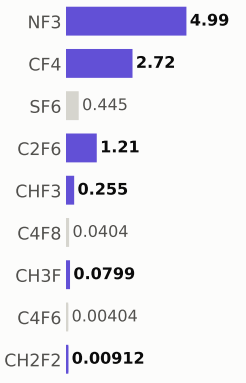

Step #16330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	571.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

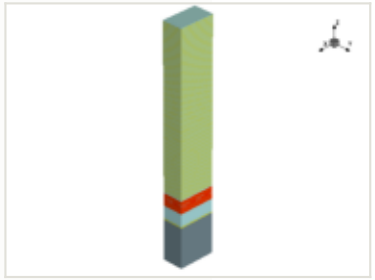

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

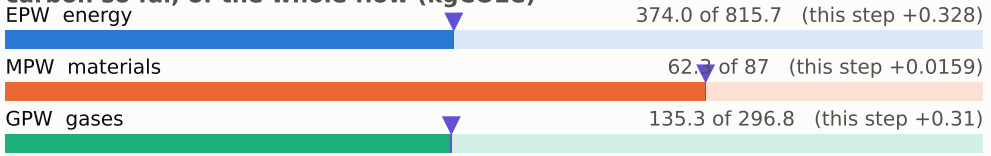

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

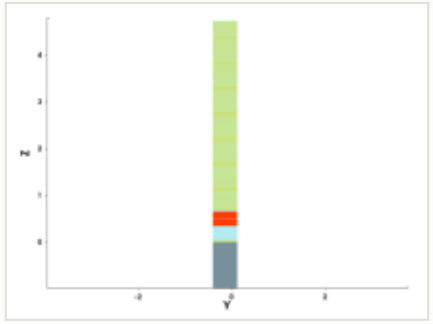

y cut at -0.150 µm

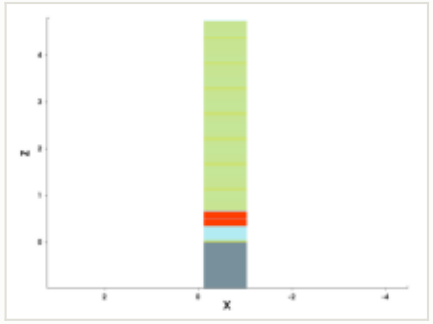

mask for this step

no mask for this step

steps by process area

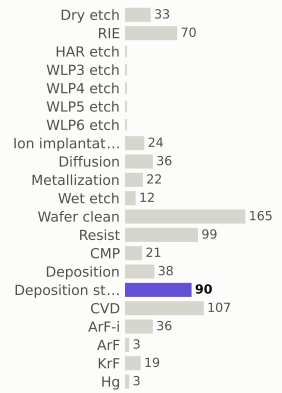

materials deposited (g)

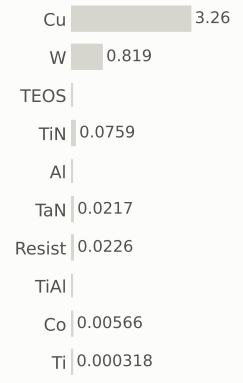

gases emitted (g)

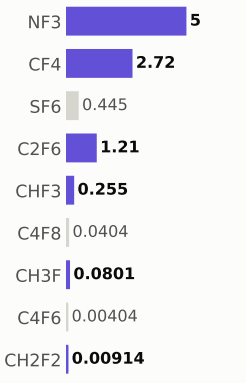

Step #16340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	572.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

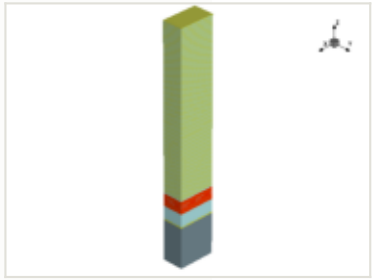

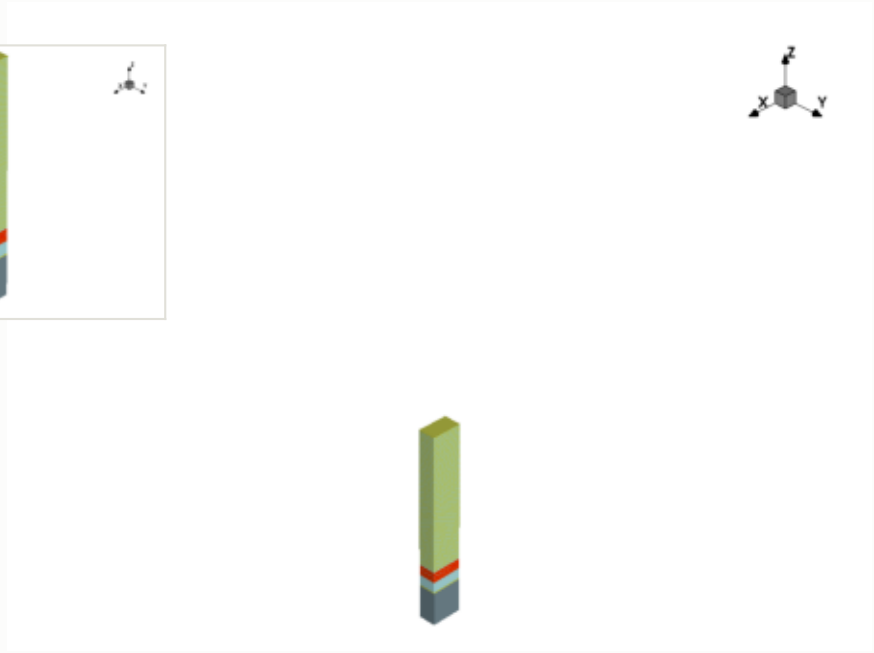

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

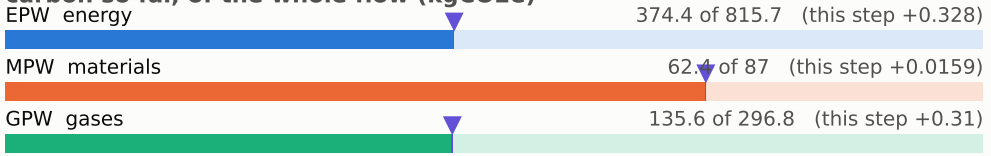

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

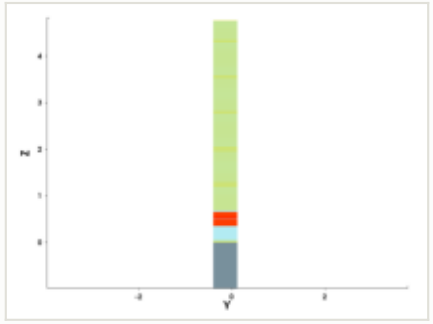

y cut at -0.150 µm

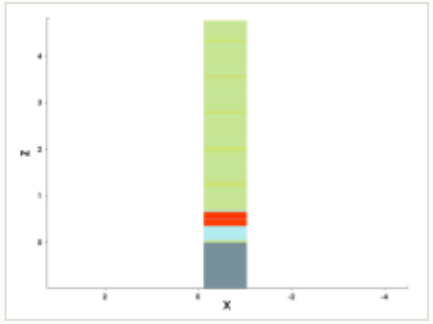

mask for this step

no mask for this step

steps by process area

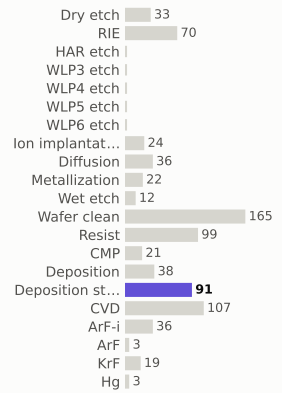

materials deposited (g)

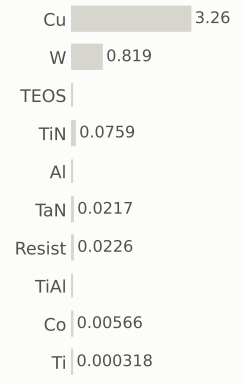

gases emitted (g)

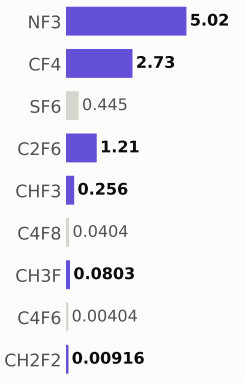

Step #16350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	573.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

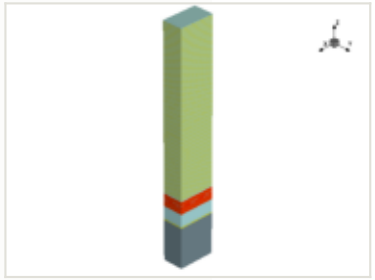

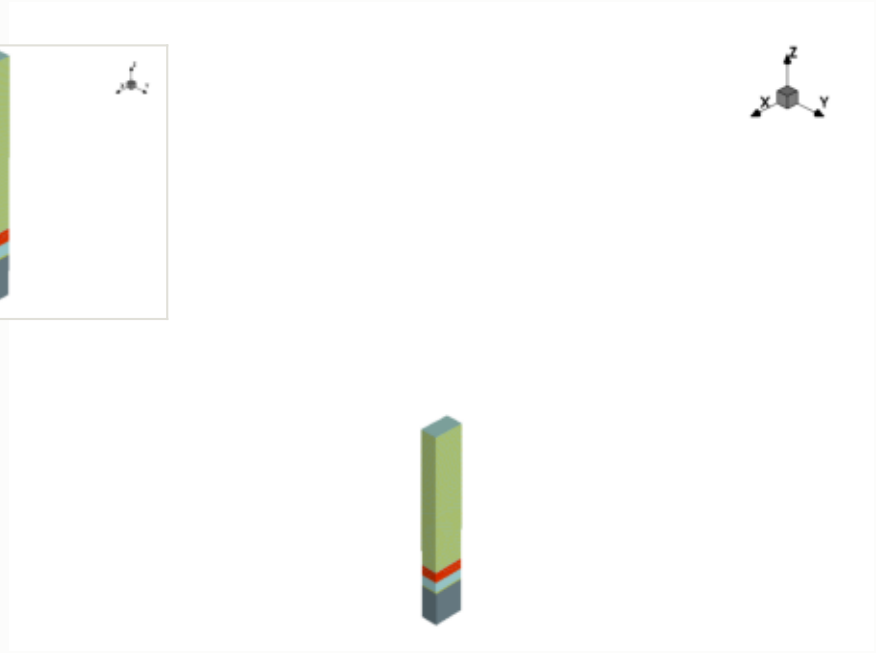

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

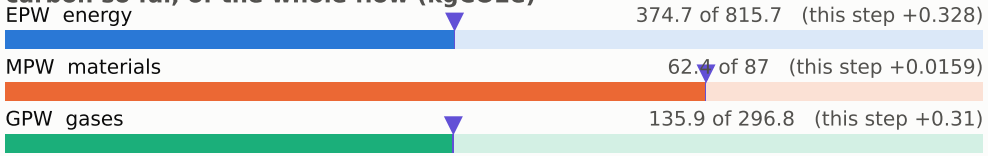

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

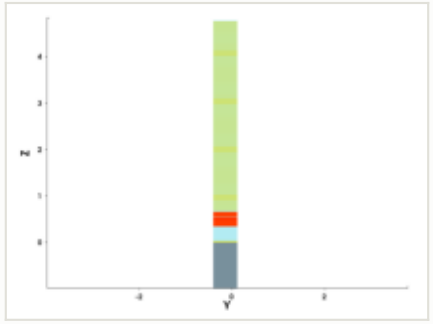

y cut at -0.150 µm

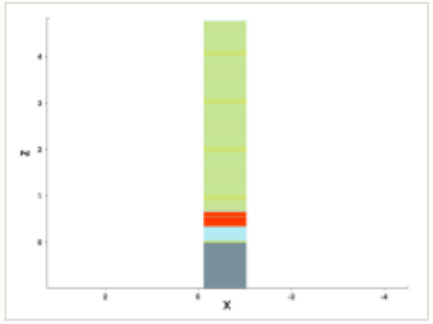

mask for this step

no mask for this step

steps by process area

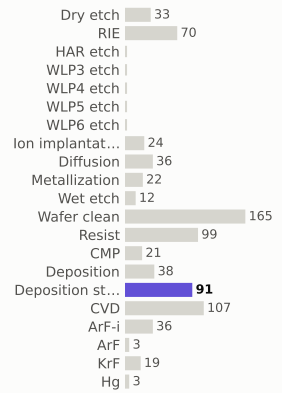

materials deposited (g)

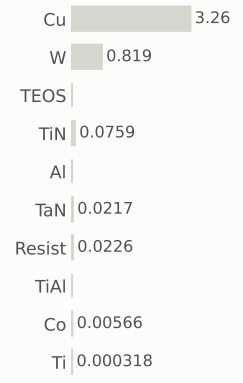

gases emitted (g)

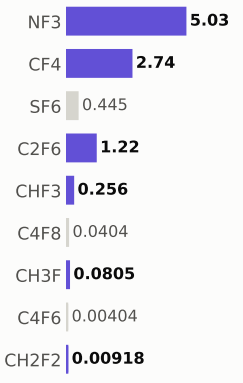

Step #16360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	573.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

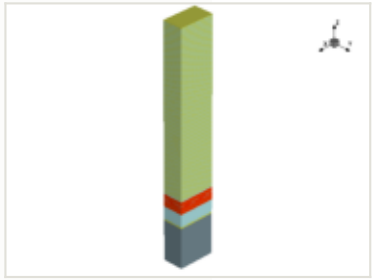

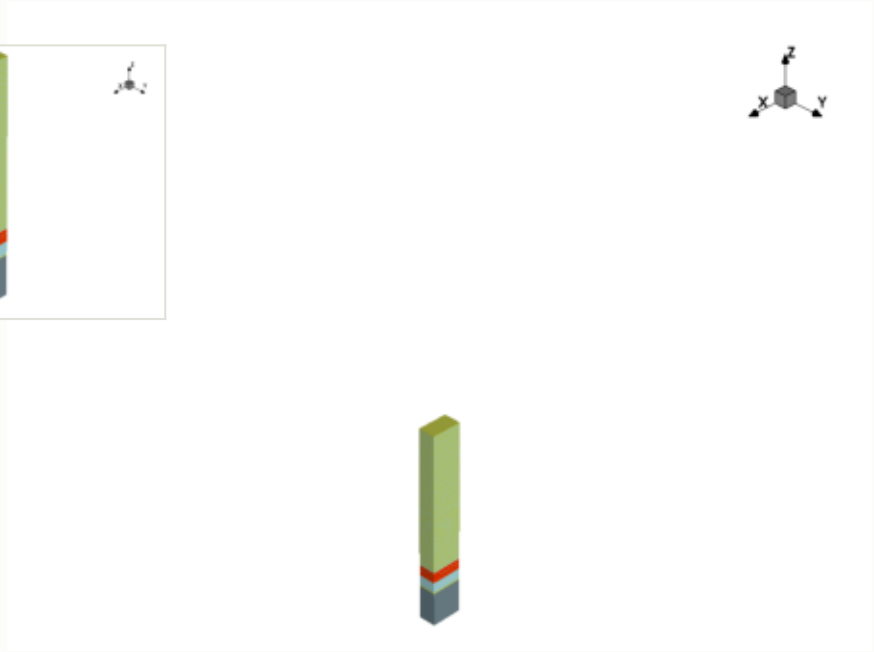

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

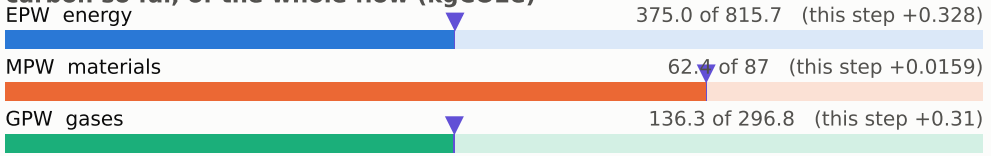

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

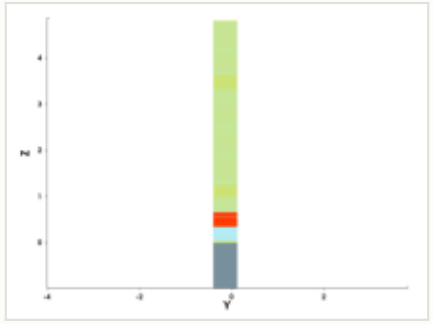

y cut at -0.150 µm

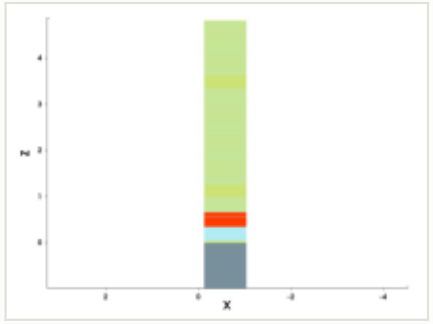

mask for this step

no mask for this step

steps by process area

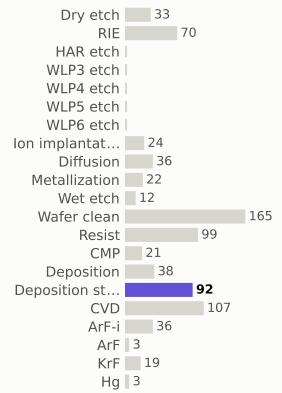

materials deposited (g)

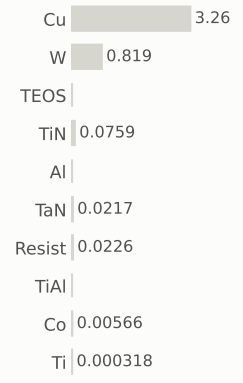

gases emitted (g)

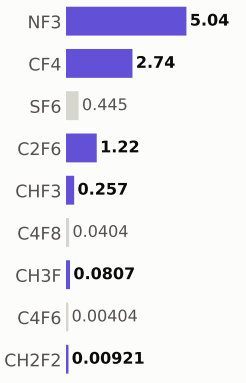

Step #16370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	574.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

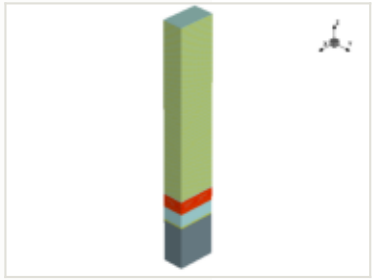

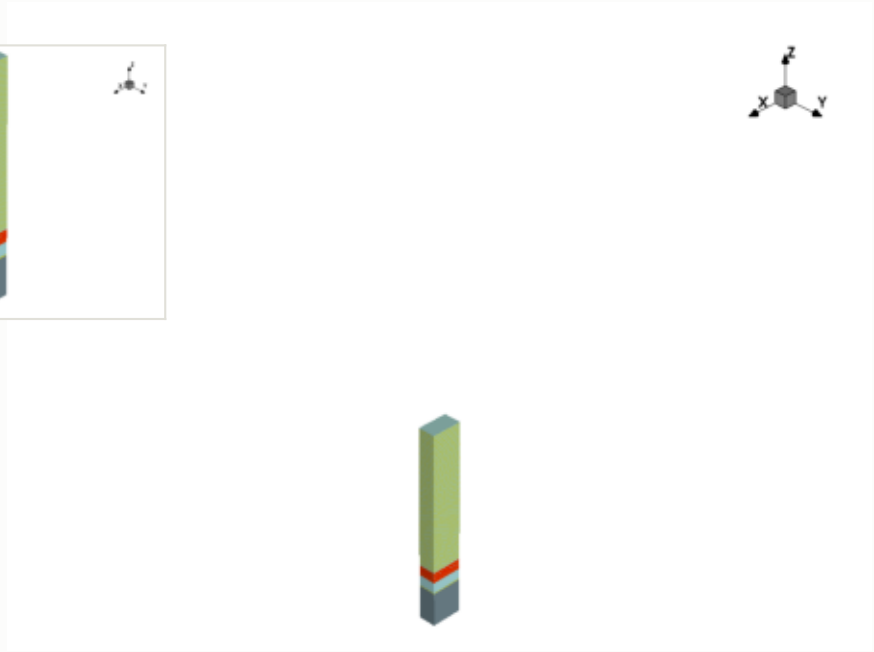

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 375.3 of 815.7 (this step +0.328)

MPW materials — 62.4 of 87 (this step +0.0159)

GPW gases — 136.6 of 296.8 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

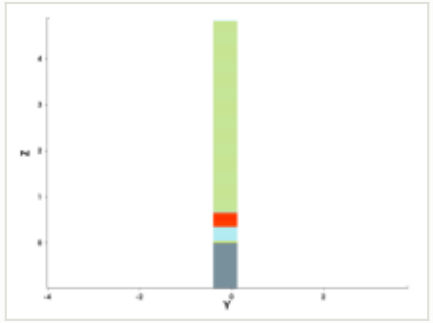

y cut at -0.150 µm

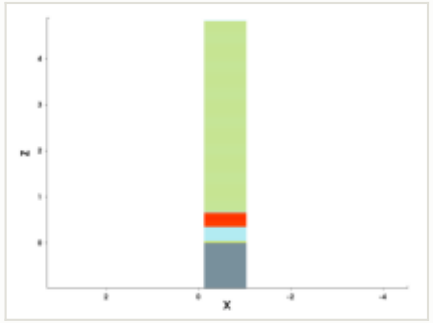

mask for this step

no mask for this step

steps by process area

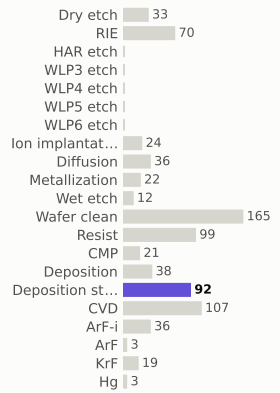

materials deposited (g)

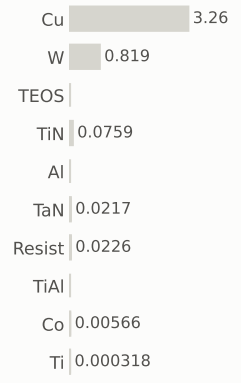

gases emitted (g)

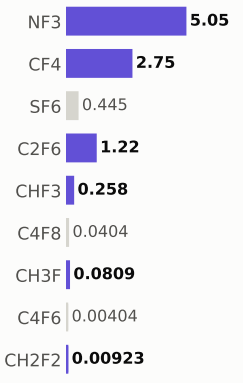

Step #16380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	575.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

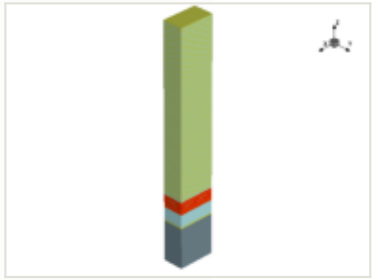

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

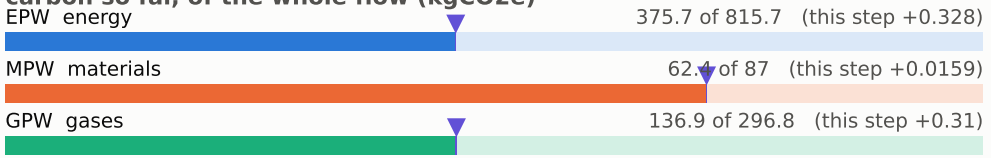

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

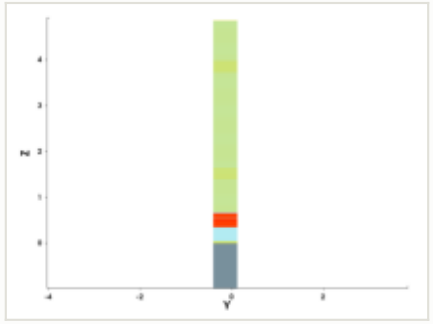

y cut at -0.150 µm

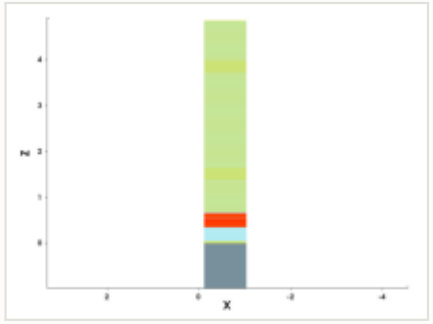

mask for this step

no mask for this step

steps by process area

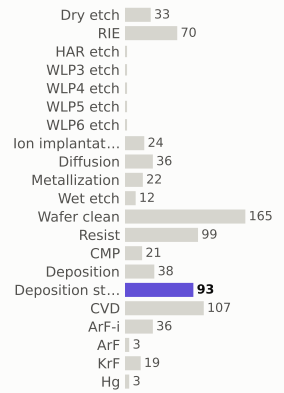

materials deposited (g)

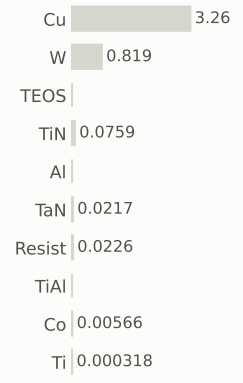

gases emitted (g)

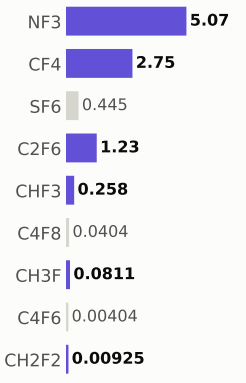

Step #16390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	575.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

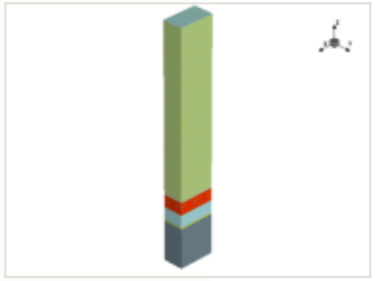

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

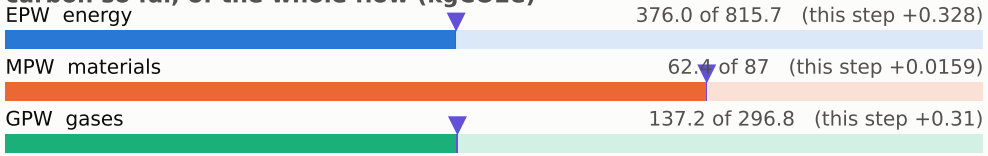

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

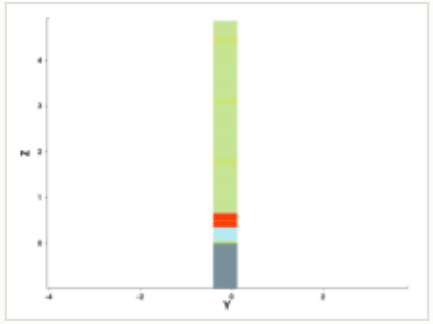

y cut at -0.150 µm

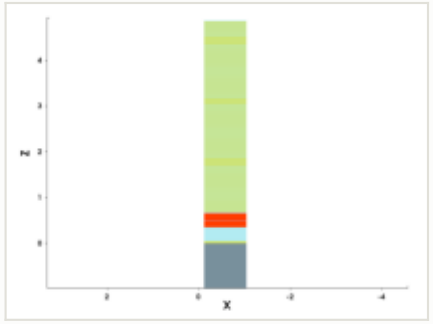

mask for this step

no mask for this step

steps by process area

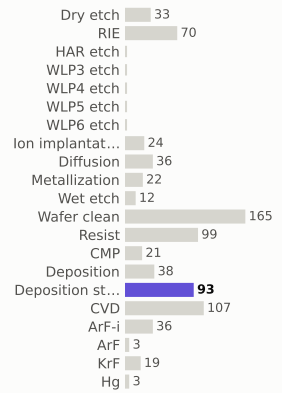

materials deposited (g)

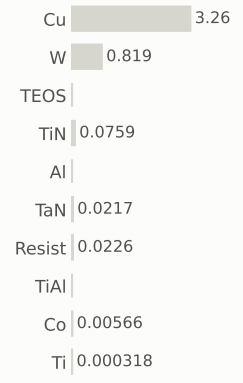

gases emitted (g)

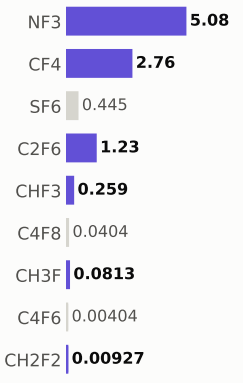

Step #16400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	576.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

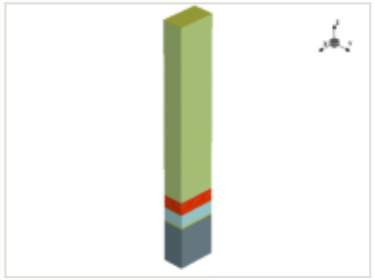

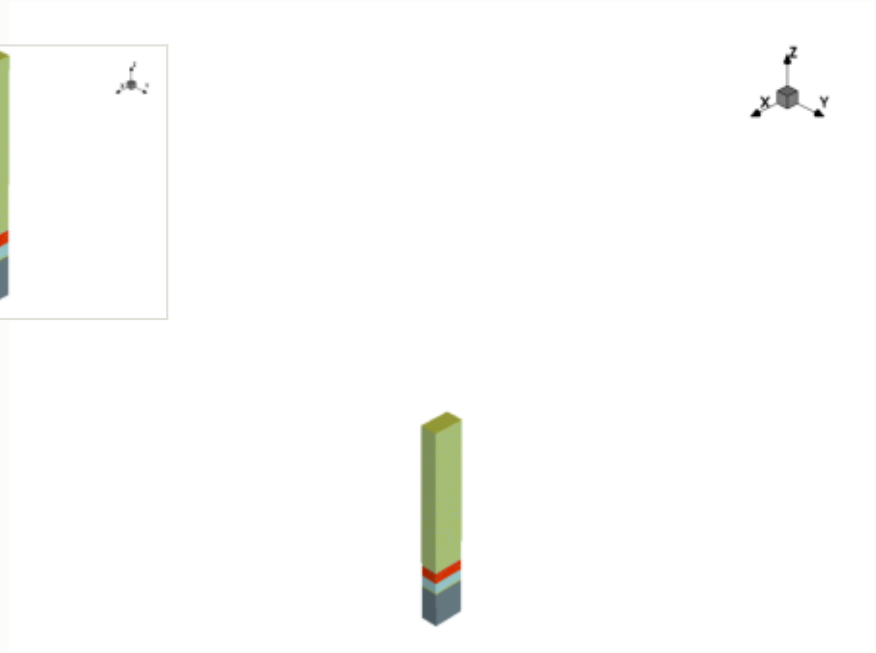

x cut at -0.570 µm

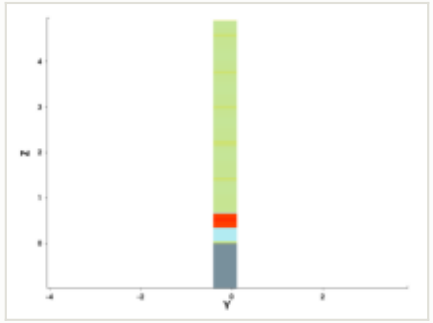

y cut at -0.150 µm

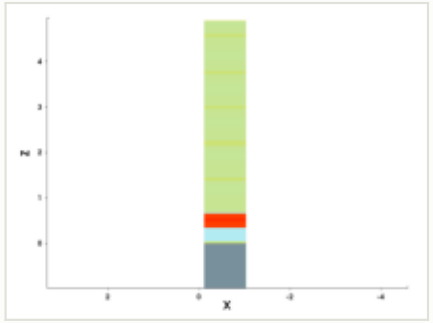

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

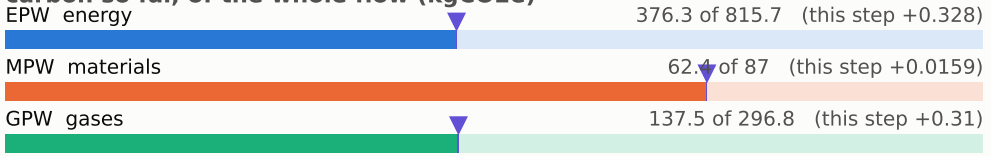

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

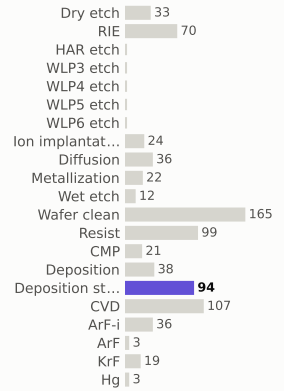

materials deposited (g)

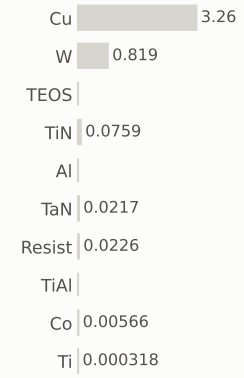

gases emitted (g)

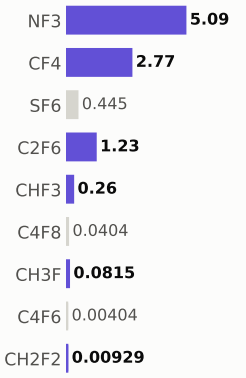

Step #16410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	576.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

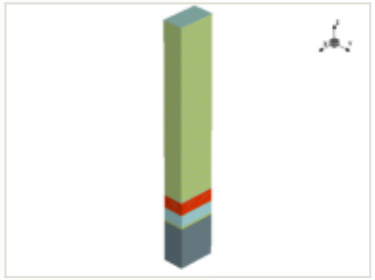

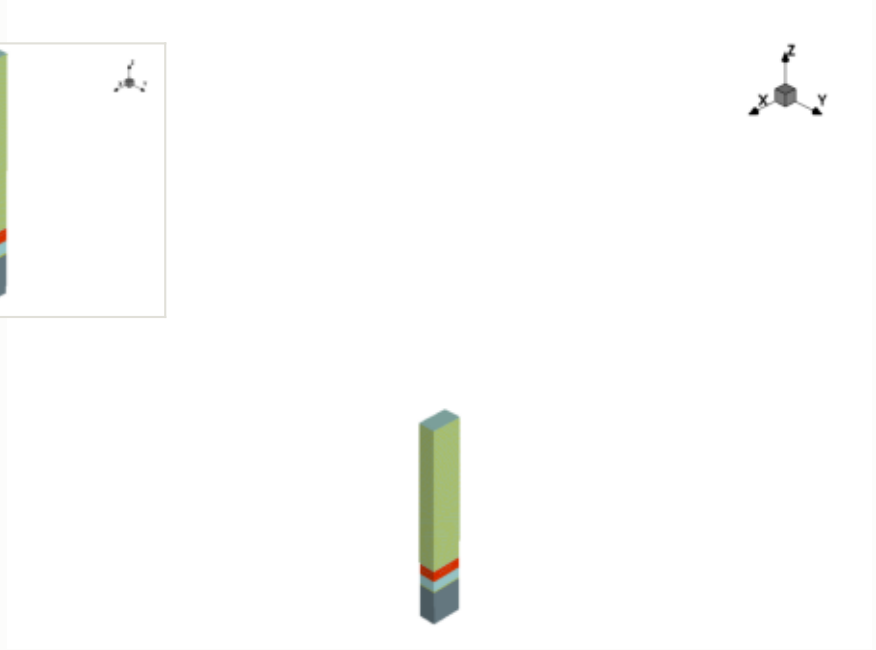

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

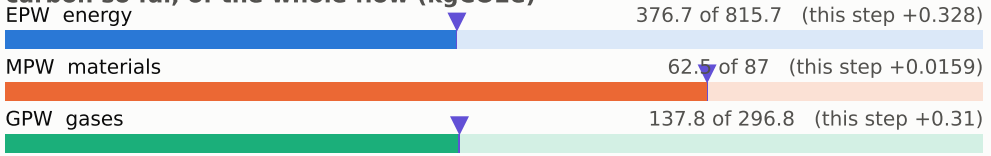

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

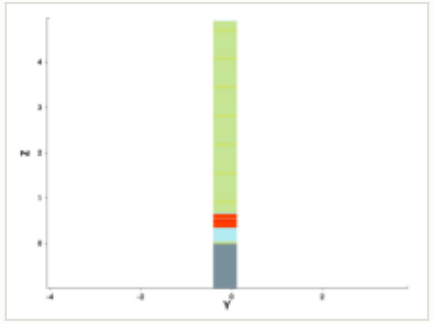

y cut at -0.150 µm

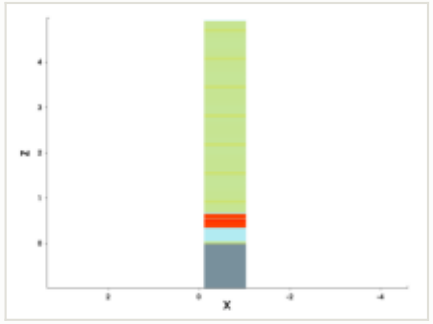

mask for this step

no mask for this step

steps by process area

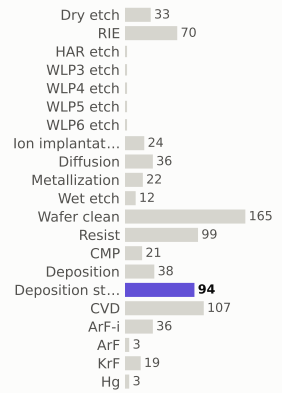

materials deposited (g)

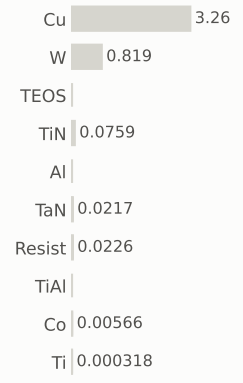

gases emitted (g)

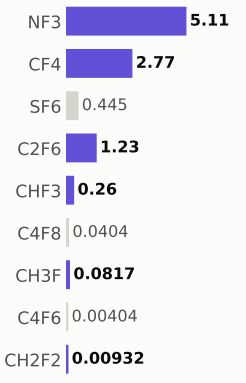

Step #16420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	577.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

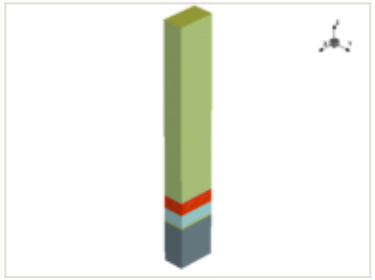

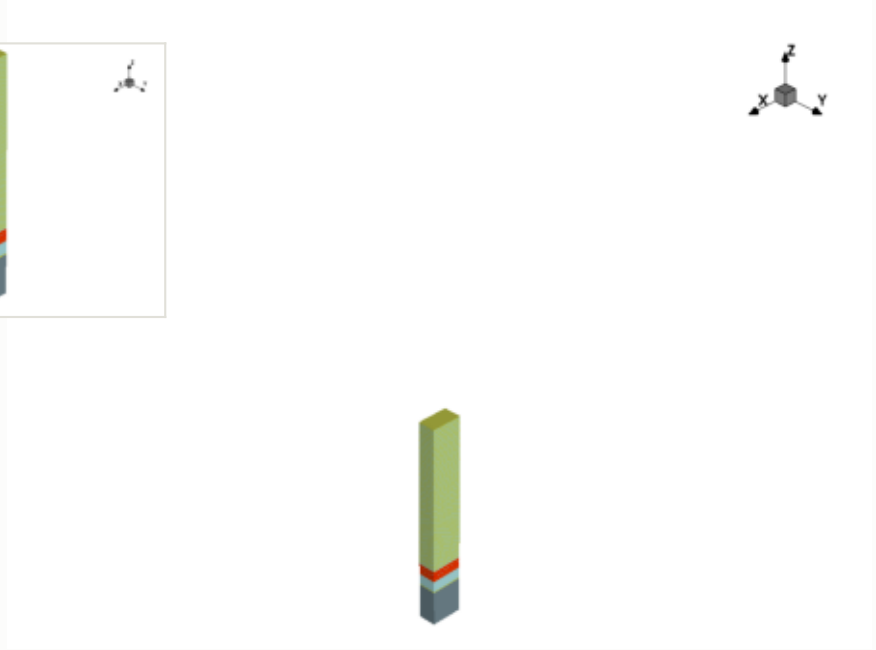

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

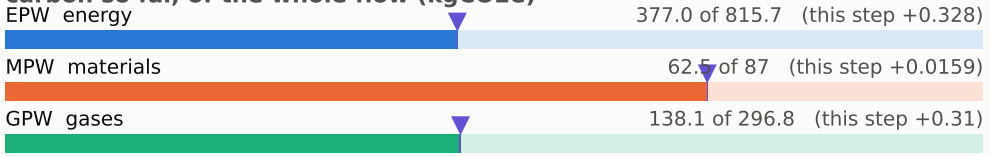

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

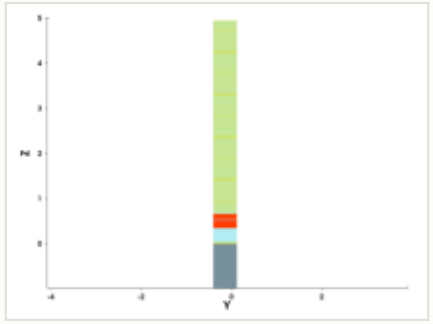

y cut at -0.150 µm

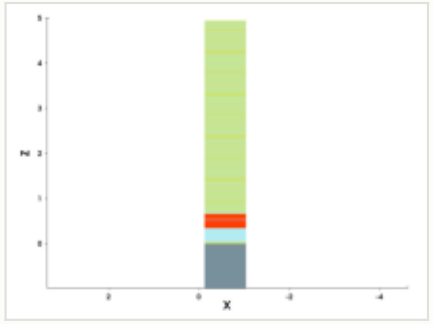

mask for this step

no mask for this step

steps by process area

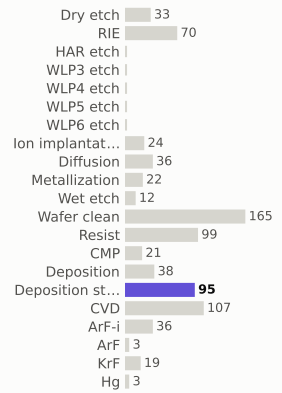

materials deposited (g)

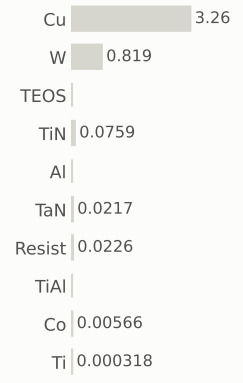

gases emitted (g)

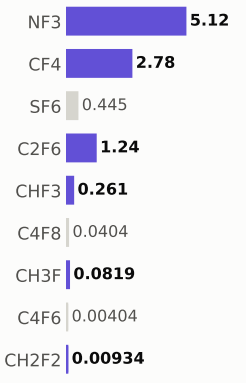

Step #16430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	578.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

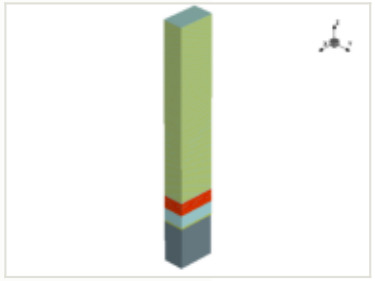

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 377.3 of 815.7 (this step +0.328)

MPW materials — 62.5 of 87 (this step +0.0159)

GPW gases — 138.4 of 296.8 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

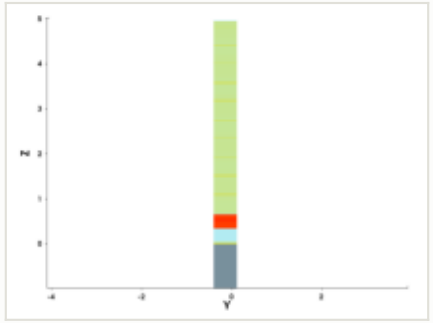

y cut at -0.150 µm

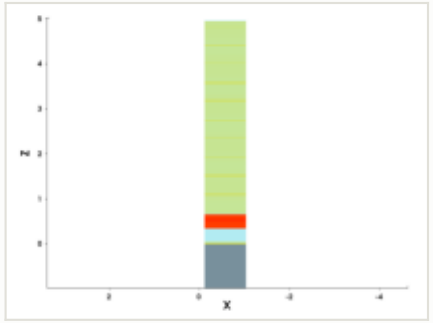

mask for this step

no mask for this step

steps by process area

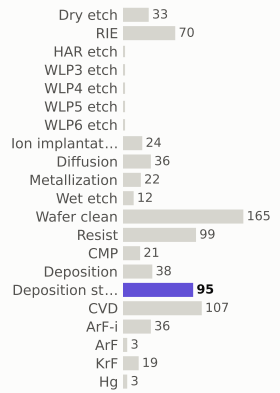

materials deposited (g)

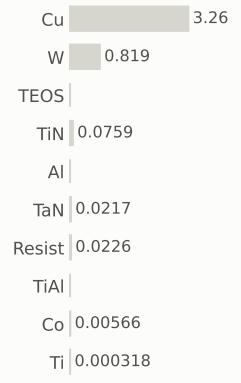

gases emitted (g)

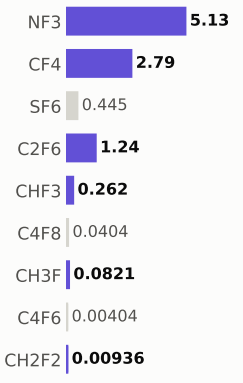

Step #16440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	578.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

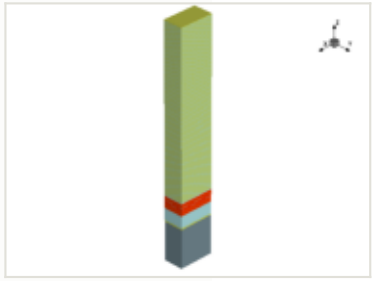

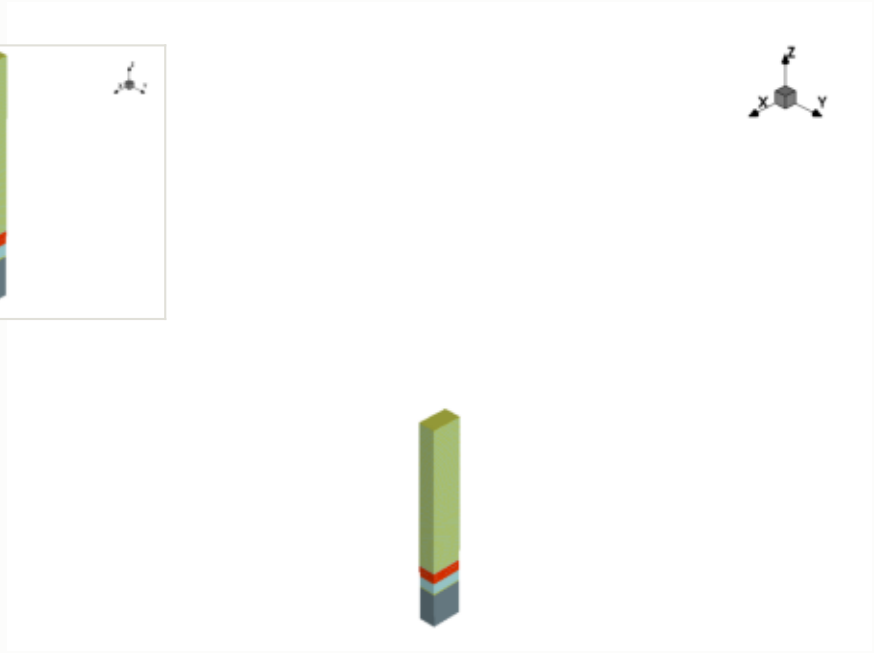

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

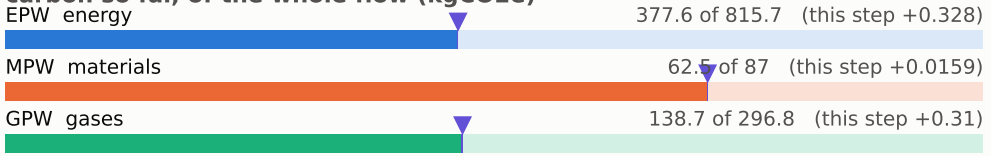

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

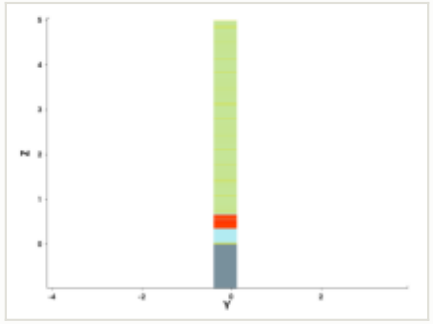

y cut at -0.150 µm

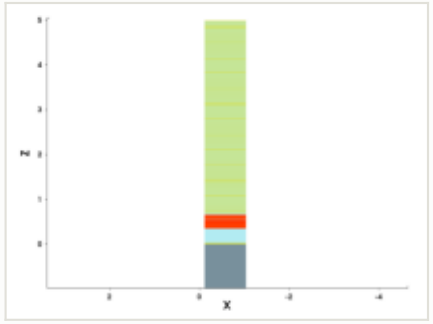

mask for this step

no mask for this step

steps by process area

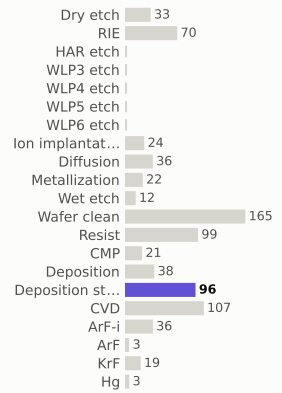

materials deposited (g)

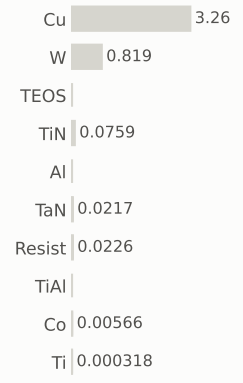

gases emitted (g)

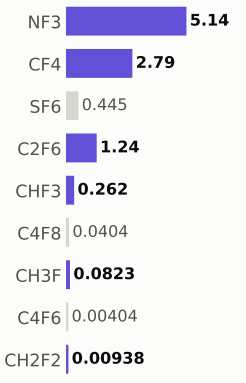

Step #16450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	579.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

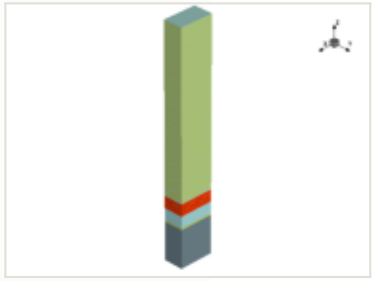

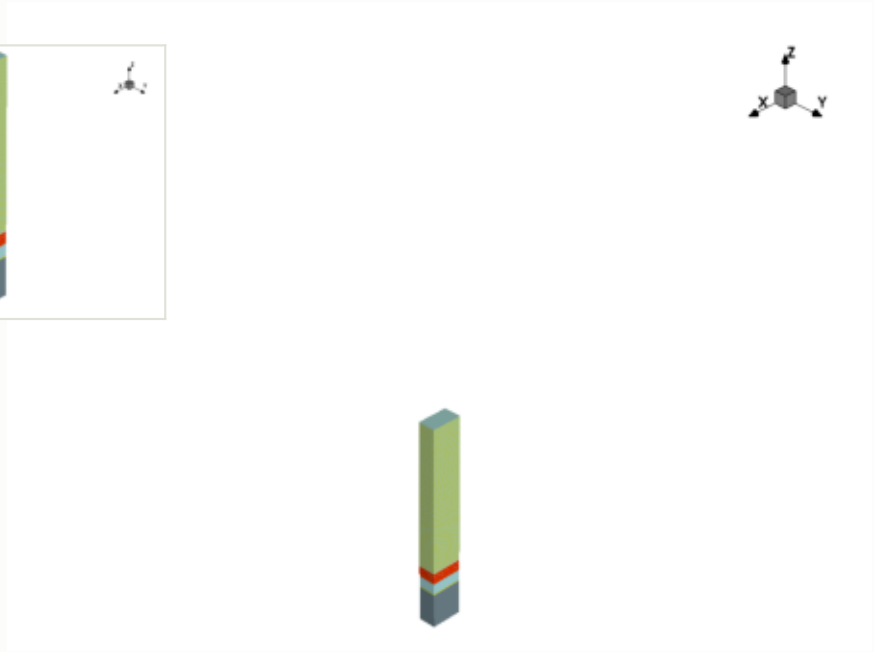

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

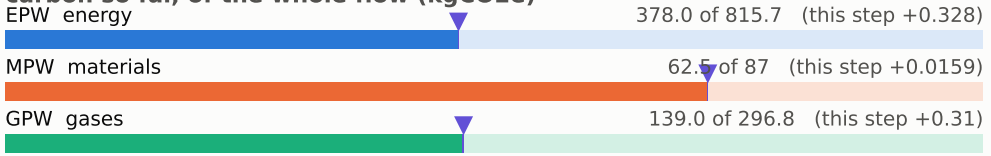

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

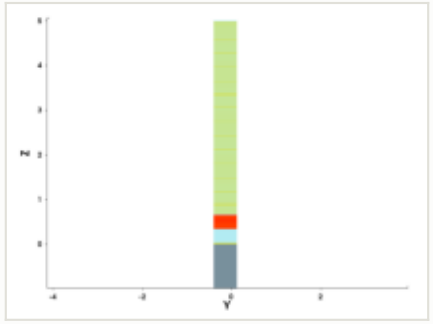

y cut at -0.150 µm

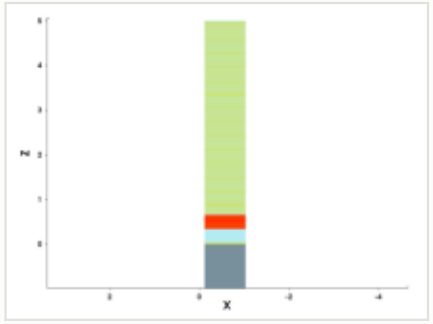

mask for this step

no mask for this step

steps by process area

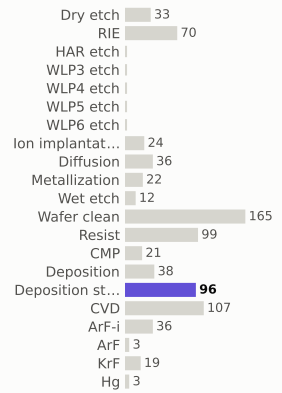

materials deposited (g)

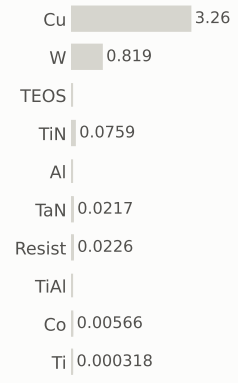

gases emitted (g)

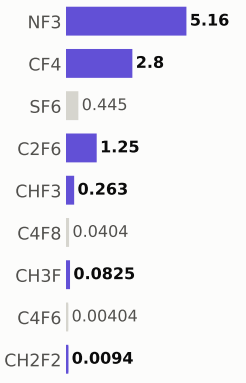

Step #16460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	580.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

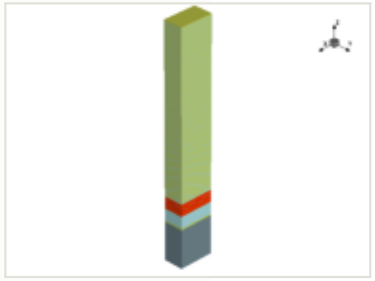

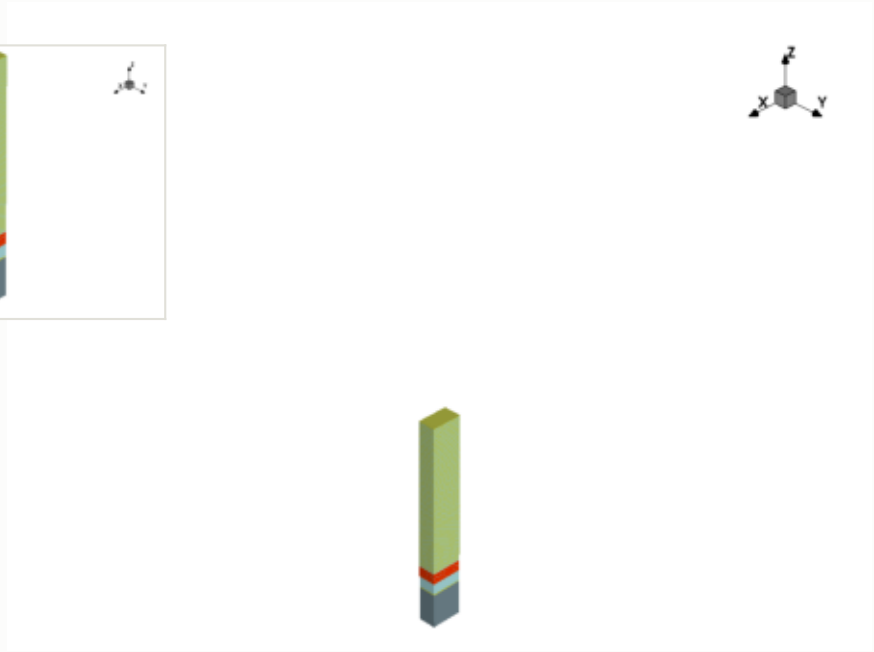

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

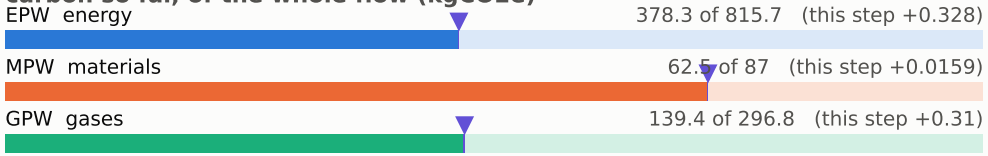

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

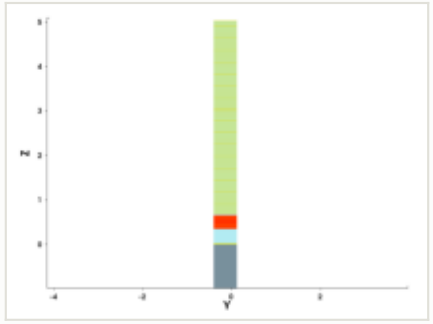

y cut at -0.150 µm

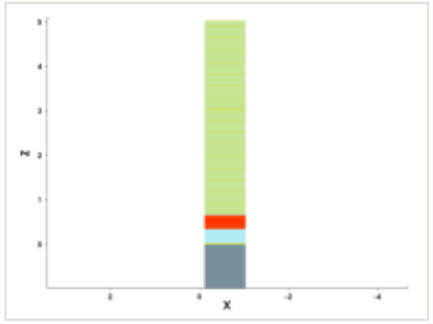

mask for this step

no mask for this step

steps by process area

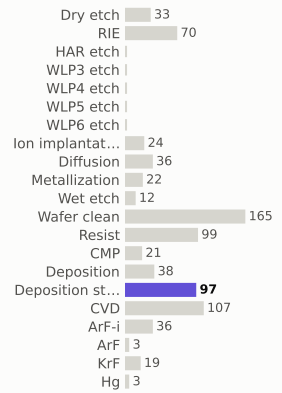

materials deposited (g)

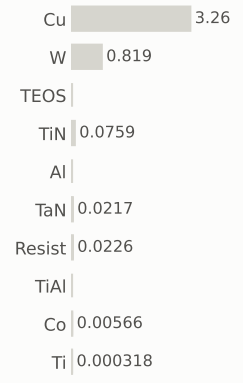

gases emitted (g)

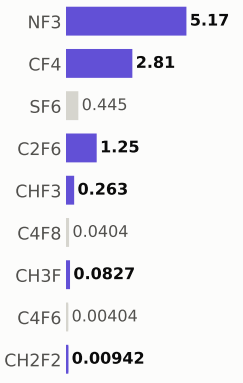

Step #16470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	580.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

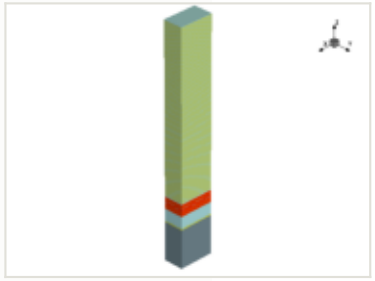

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

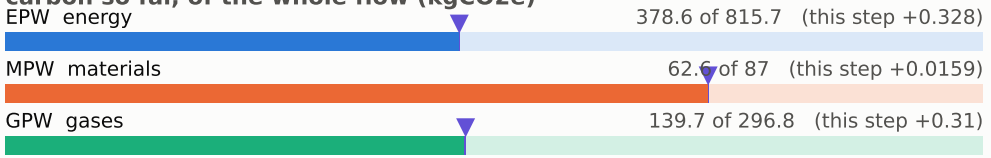

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

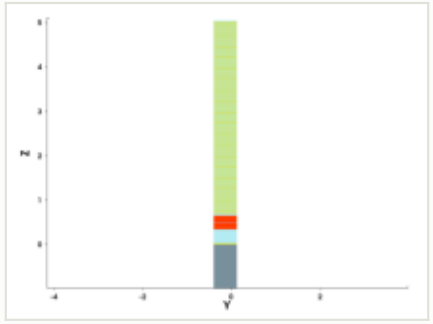

y cut at -0.150 µm

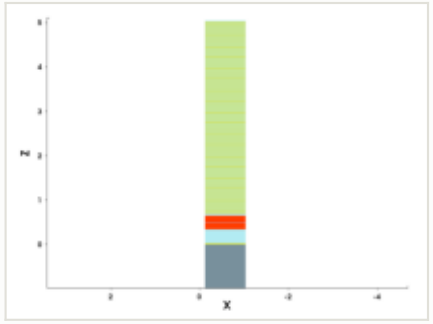

mask for this step

no mask for this step

steps by process area

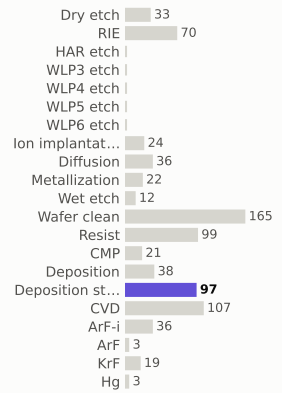

materials deposited (g)

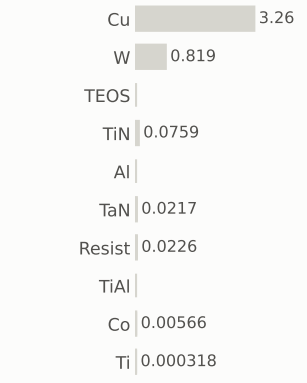

gases emitted (g)

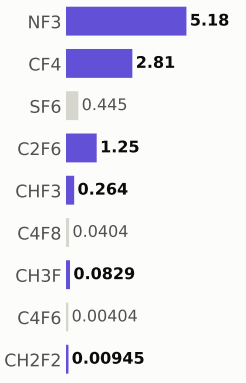

Step #16480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	581.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

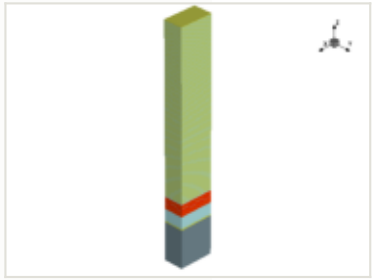

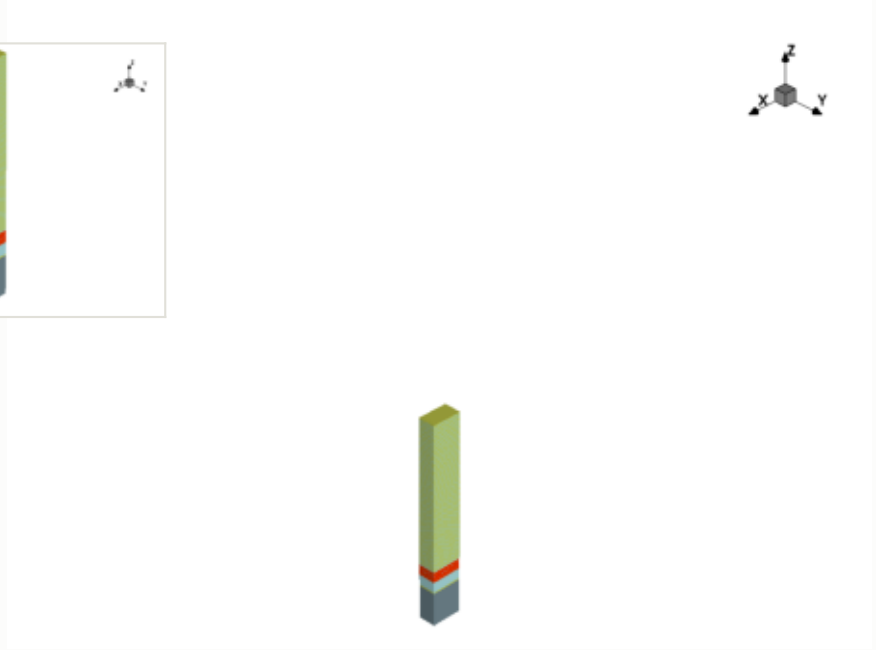

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

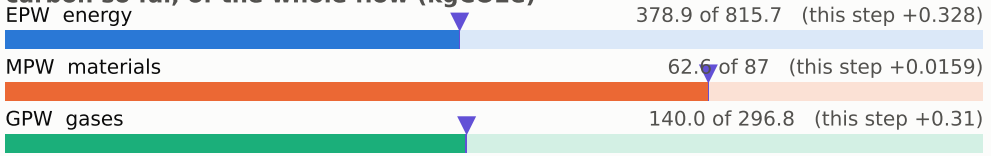

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

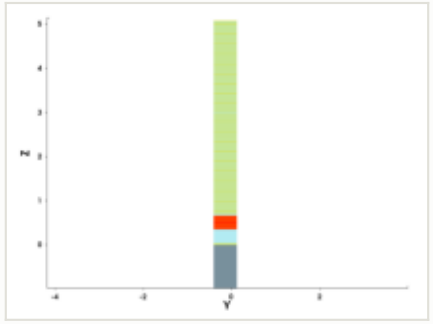

y cut at -0.150 µm

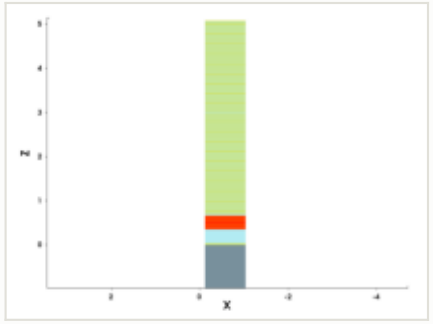

mask for this step

no mask for this step

steps by process area

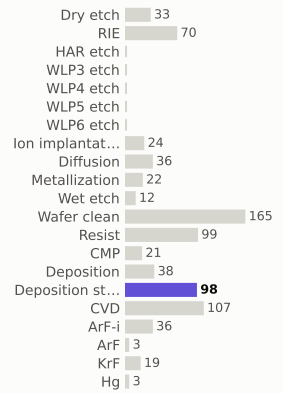

materials deposited (g)

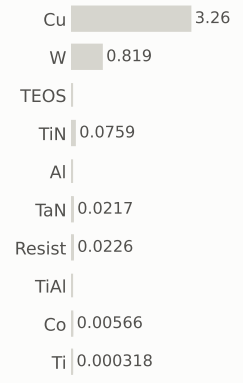

gases emitted (g)

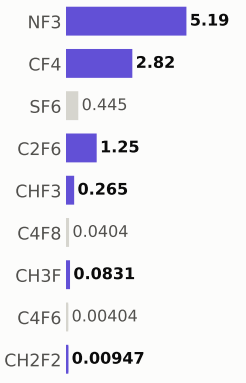

Step #16490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	582.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

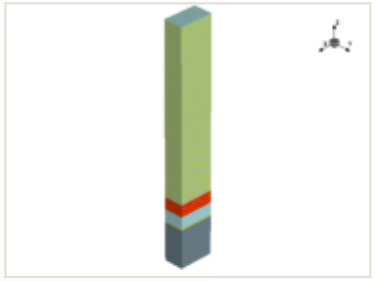

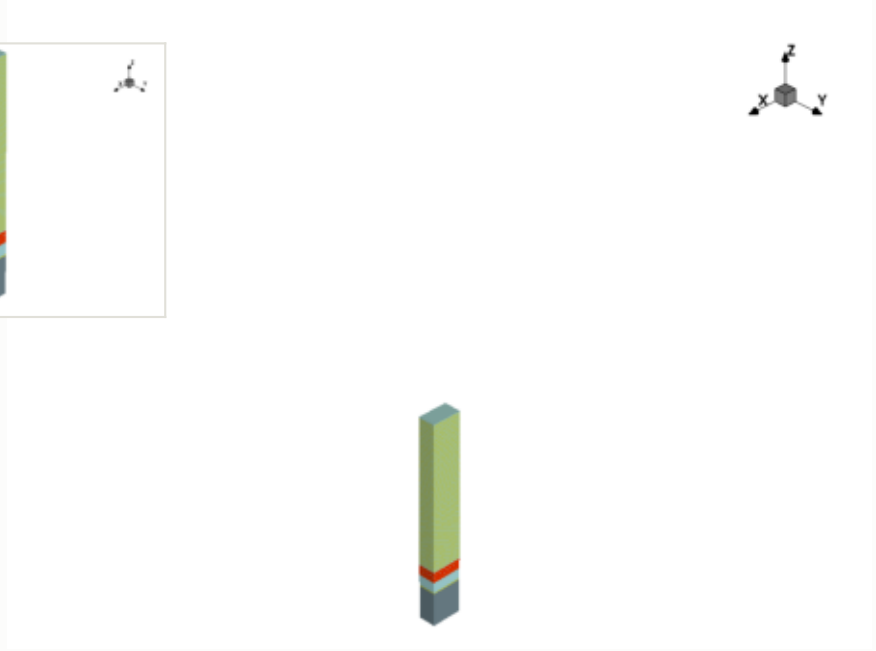

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.025 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

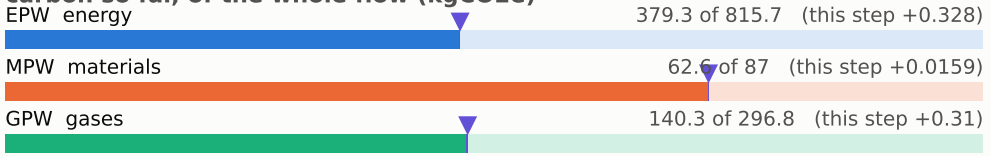

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

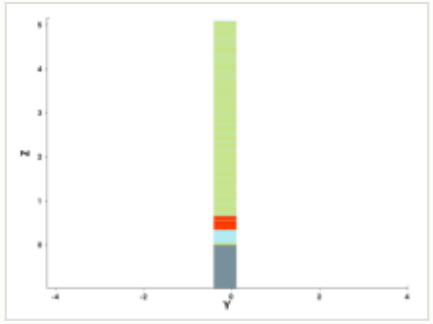

y cut at -0.150 µm

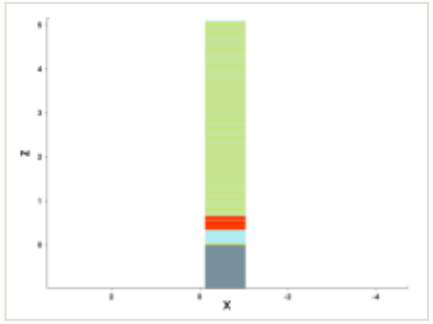

mask for this step

no mask for this step

steps by process area

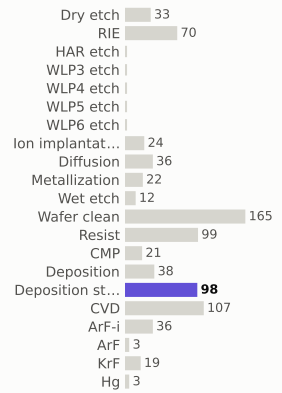

materials deposited (g)

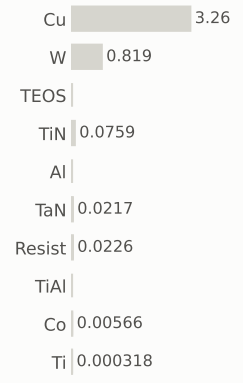

gases emitted (g)

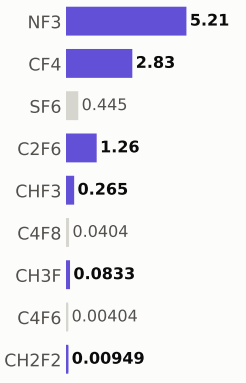

Step #16500: CVD

depo_isotropic · CVD

1.31	583.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

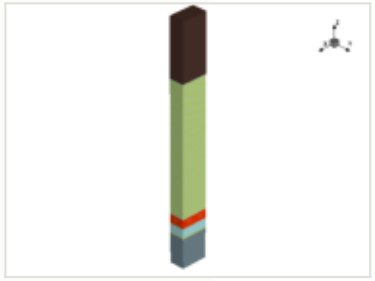

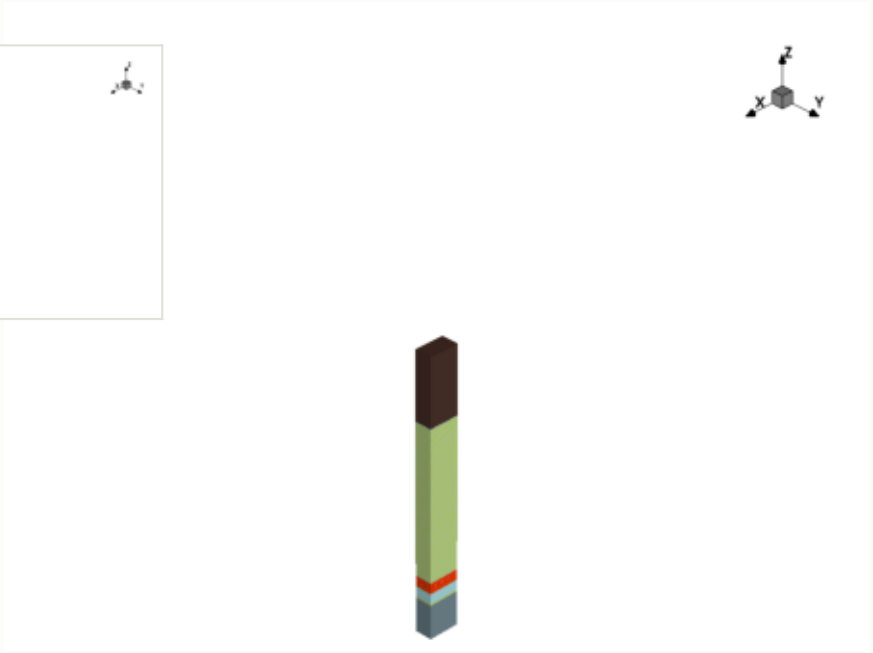

x cut at -0.570 µm

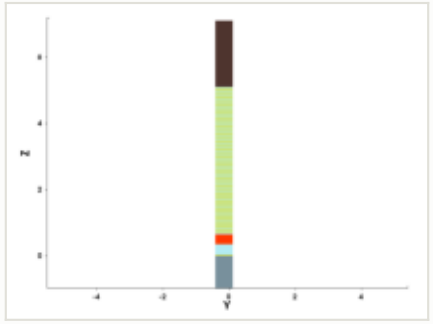

y cut at -0.150 µm

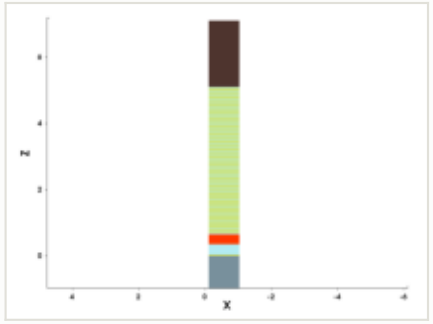

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

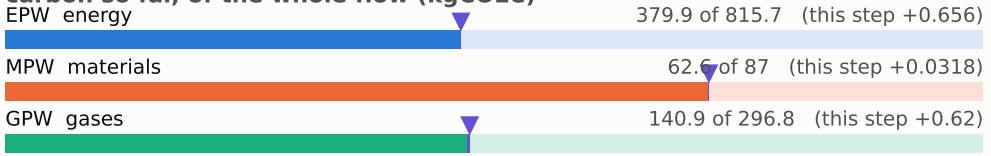

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

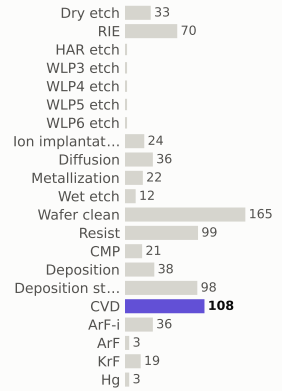

materials deposited (g)

gases emitted (g)

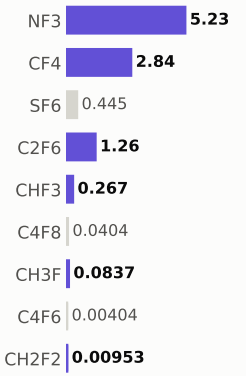

Step #16510: CVD

depo_isotropic · CVD

1.31	584.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

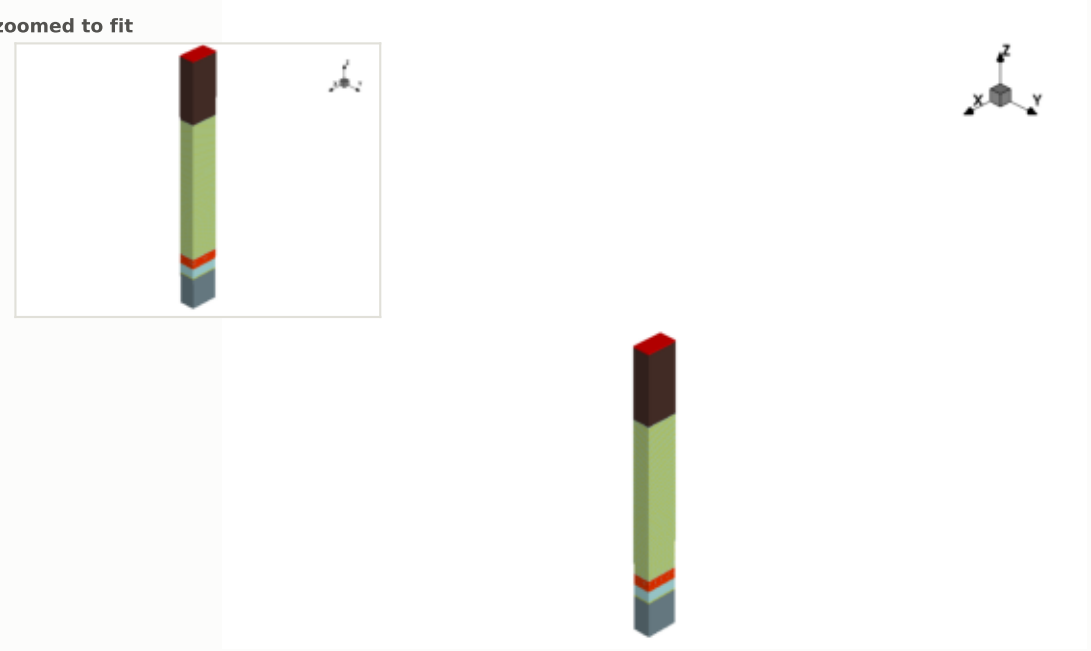

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

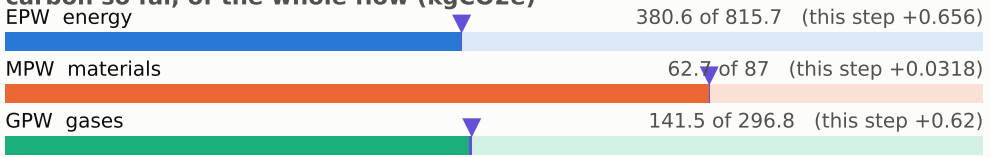

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

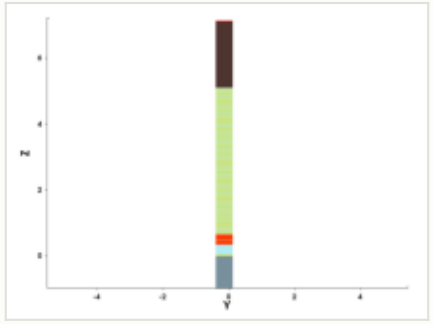

y cut at -0.150 µm

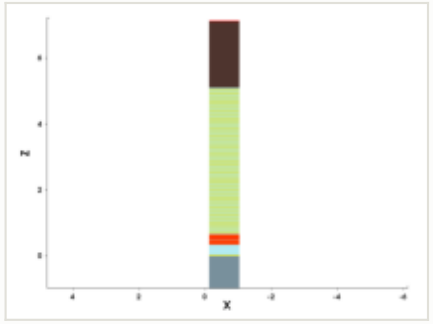

mask for this step

no mask for this step

steps by process area

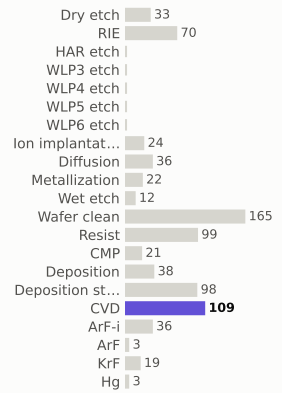

materials deposited (g)

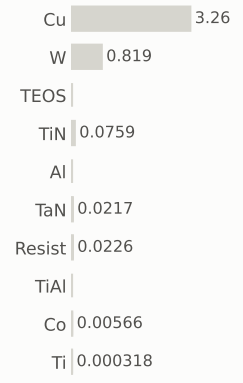

gases emitted (g)

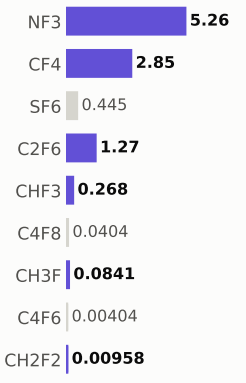

Step #16520: Wafer_clean

clean · Wafer_clean

0.169	584.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

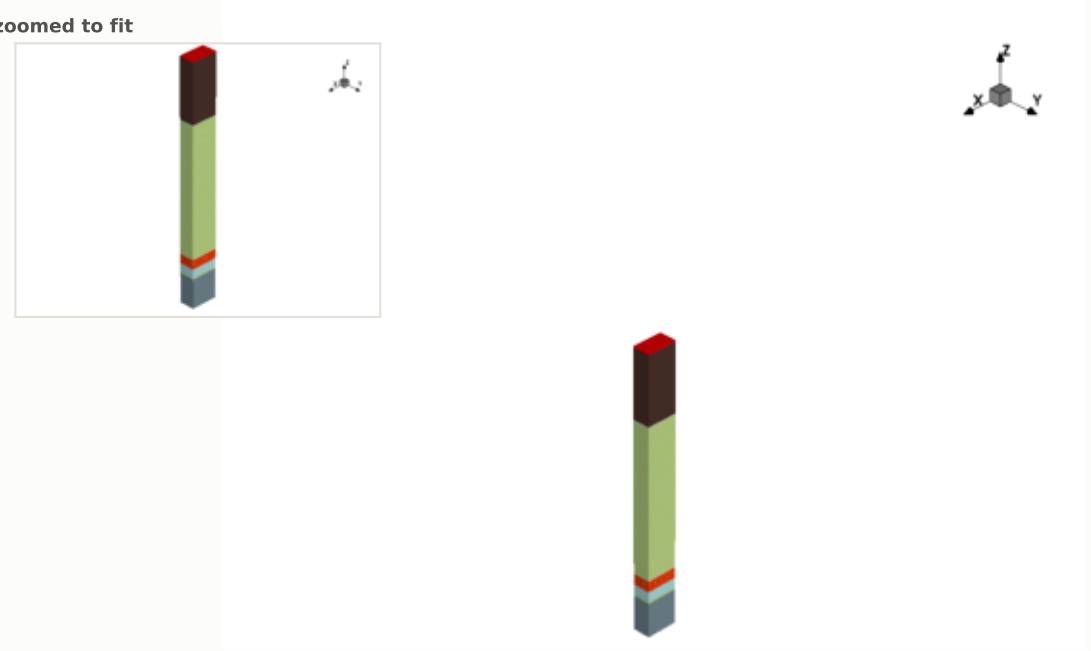

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

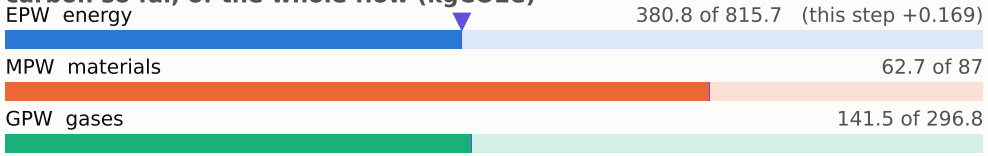

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

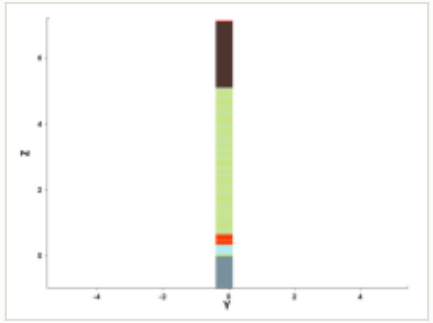

y cut at -0.150 µm

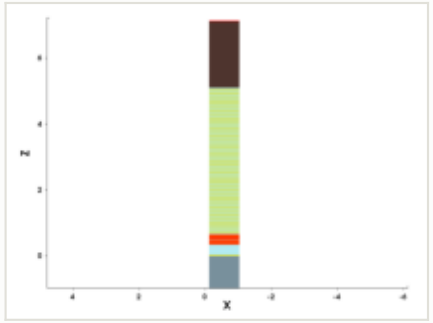

mask for this step

no mask for this step

steps by process area

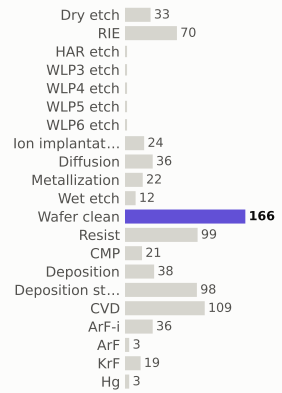

materials deposited (g)

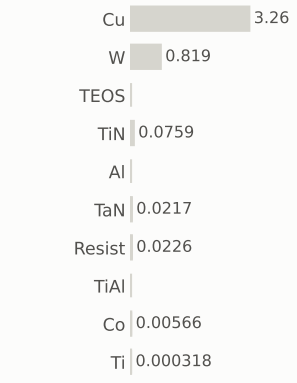

gases emitted (g)

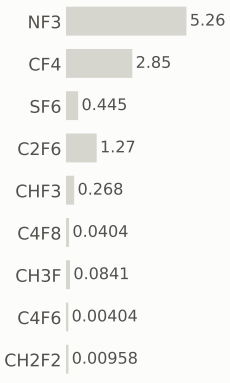

Step #16530: ArF-i

litho_patterning · ArF-i

0.217	585.2	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

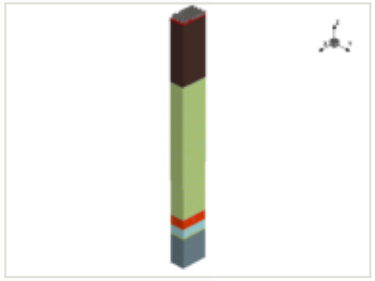

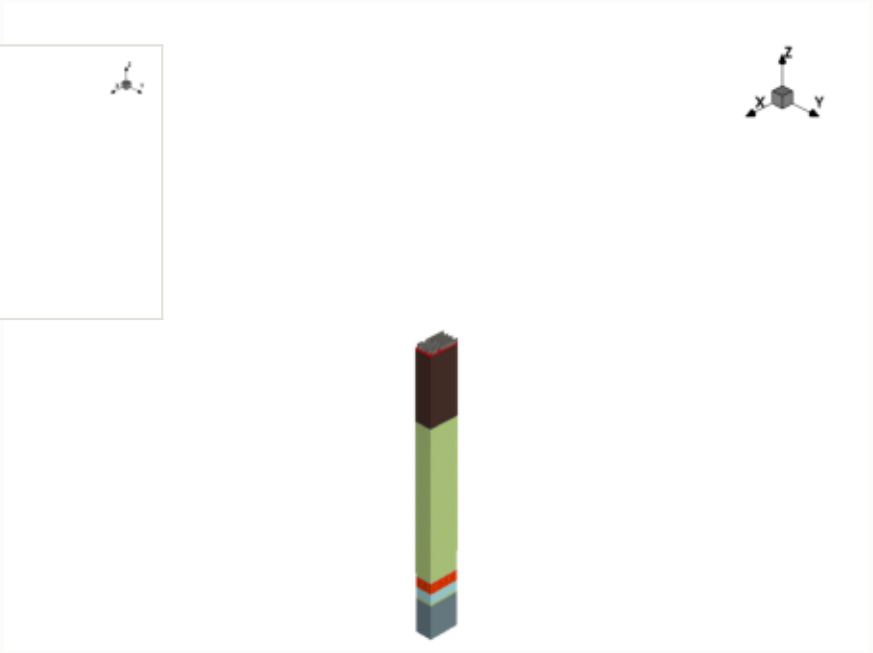

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

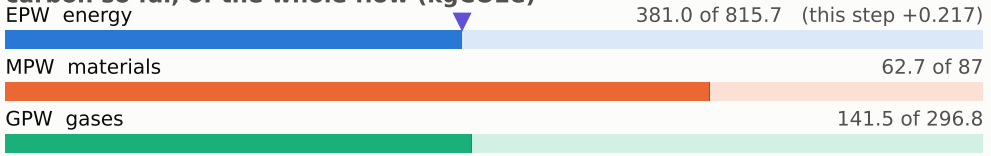

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

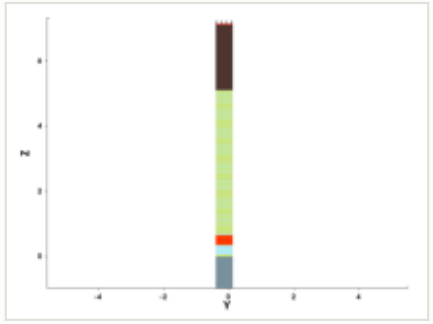

y cut at -0.150 µm

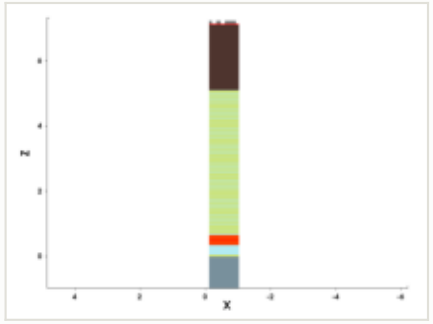

mask: layer 27:0, negative (GDSII)

steps by process area

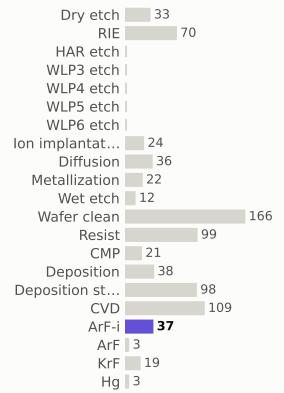

materials deposited (g)

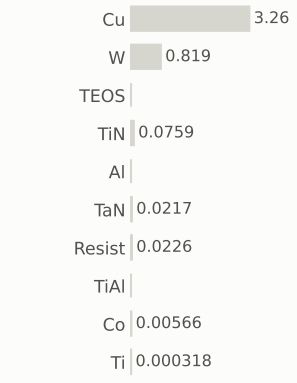

gases emitted (g)

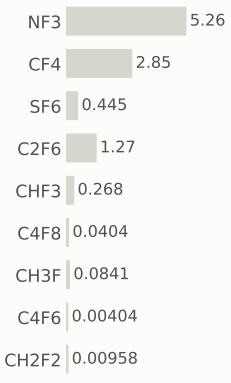

Step #16540: RIE

etch_anisotropic · RIE

1.04	586.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

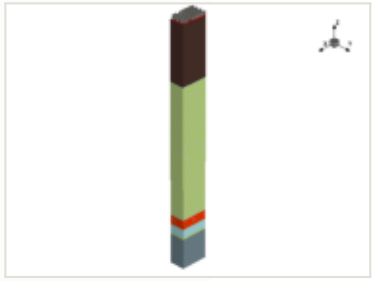

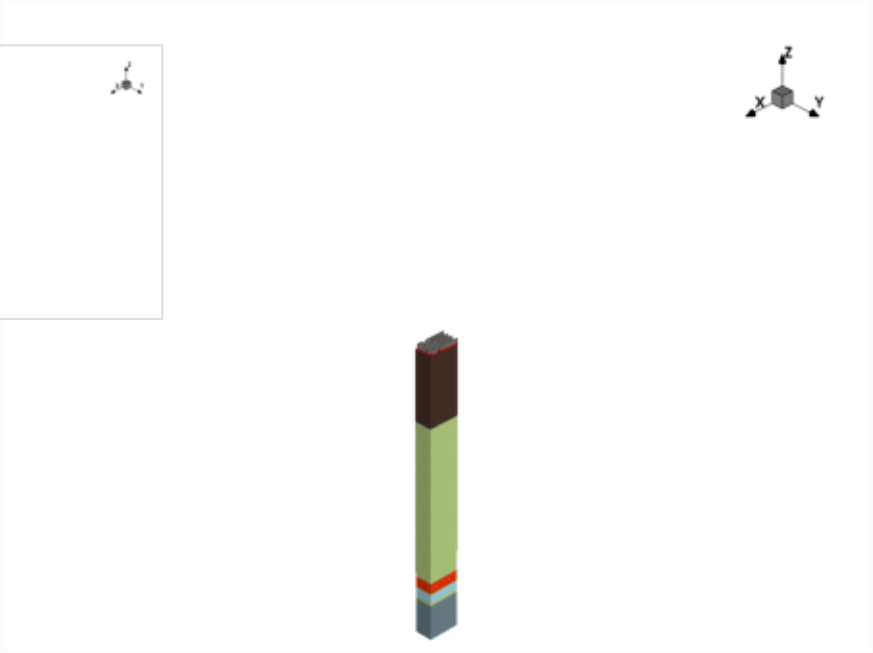

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

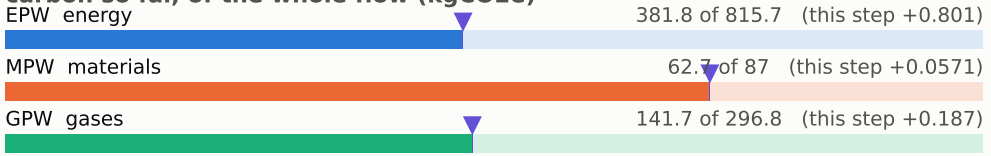

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

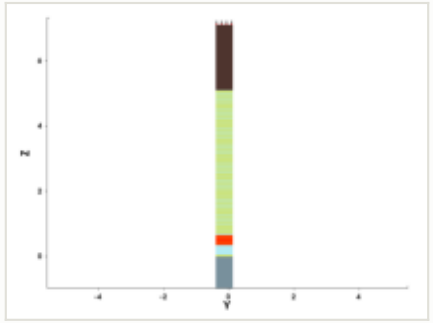

y cut at -0.150 µm

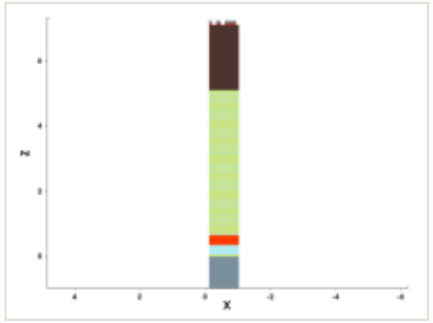

mask for this step

no mask for this step

steps by process area

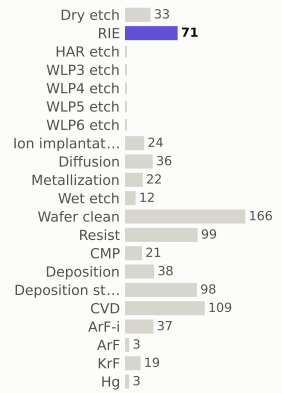

materials deposited (g)

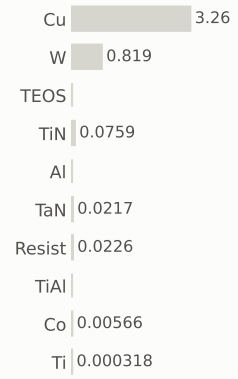

gases emitted (g)

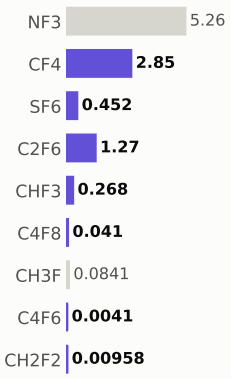

Step #16550: RIE

etch_anisotropic · RIE

1.04	587.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

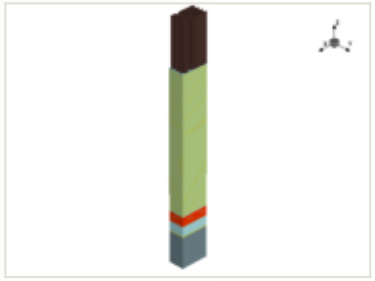

x cut at -0.570 µm

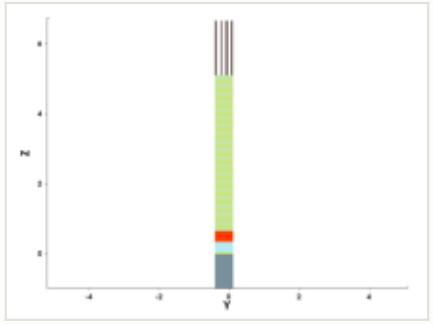

y cut at -0.150 µm

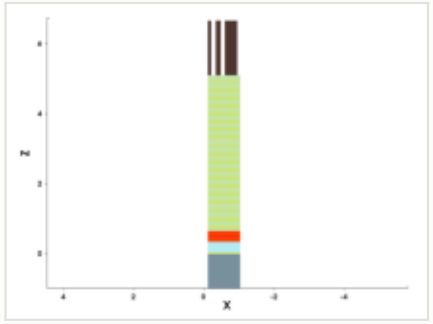

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

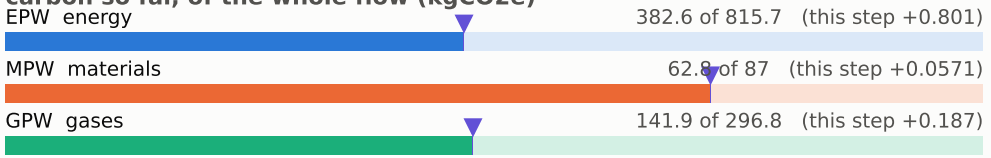

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

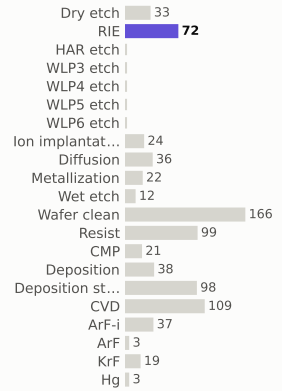

materials deposited (g)

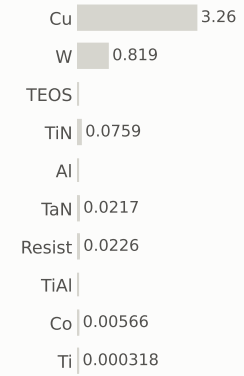

gases emitted (g)

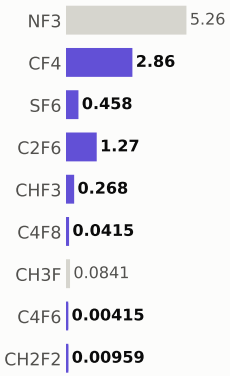

Step #16560: HAR_etch

etch_anisotropic · HAR_etch

1.04	588.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

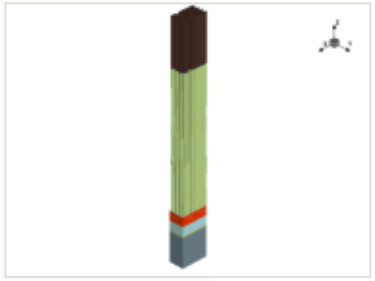

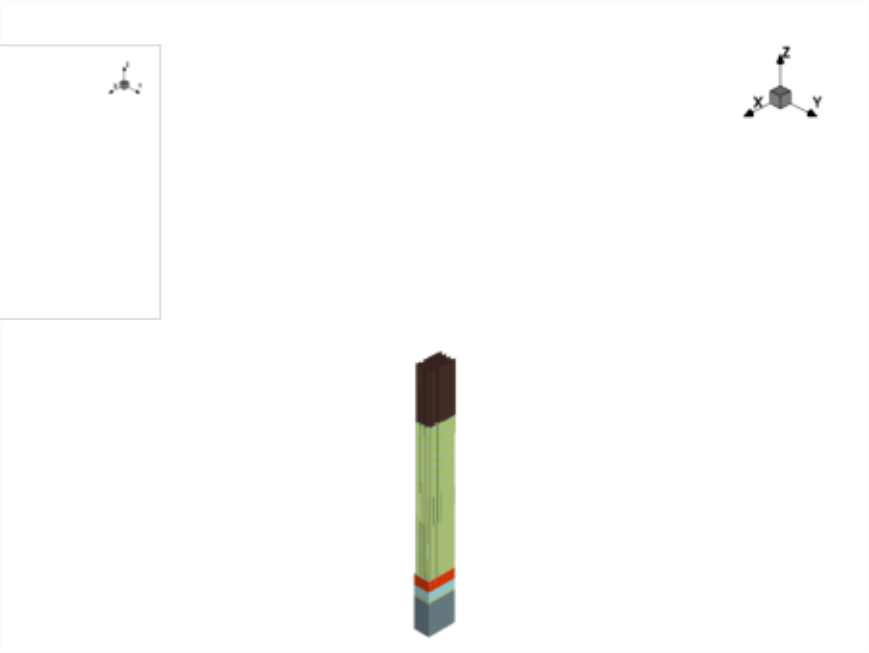

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

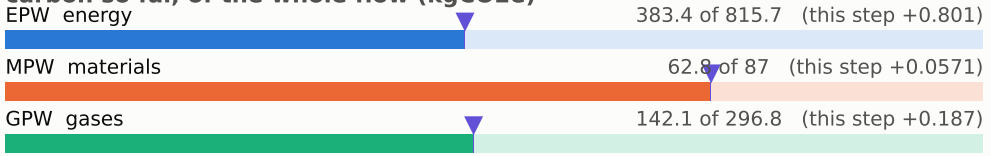

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

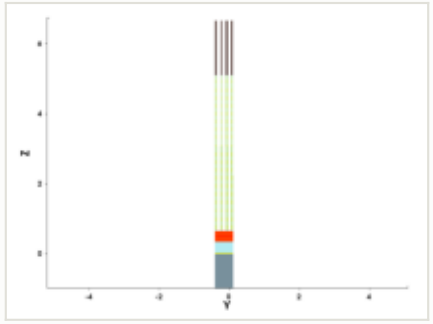

y cut at -0.150 µm

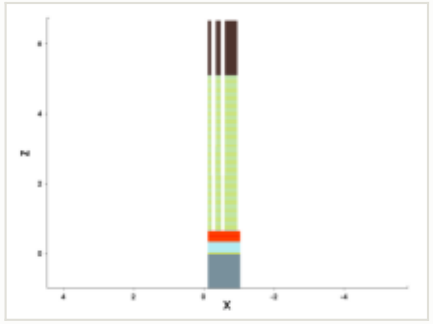

mask for this step

no mask for this step

steps by process area

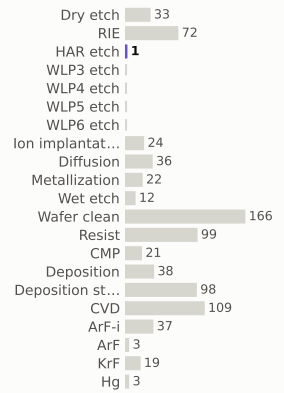

materials deposited (g)

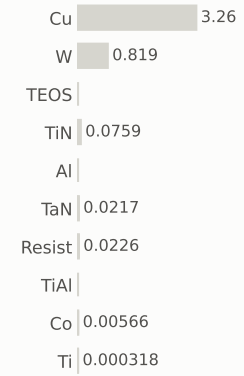

gases emitted (g)

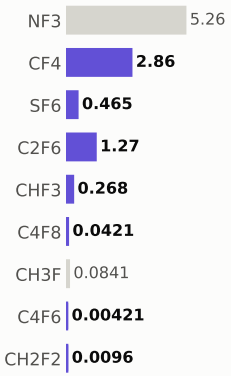

Step #16560.102: HAR_etch

etch_noop · HAR_etch

1.04	589.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

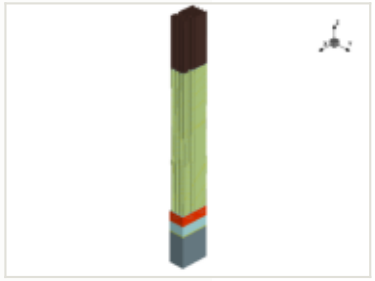

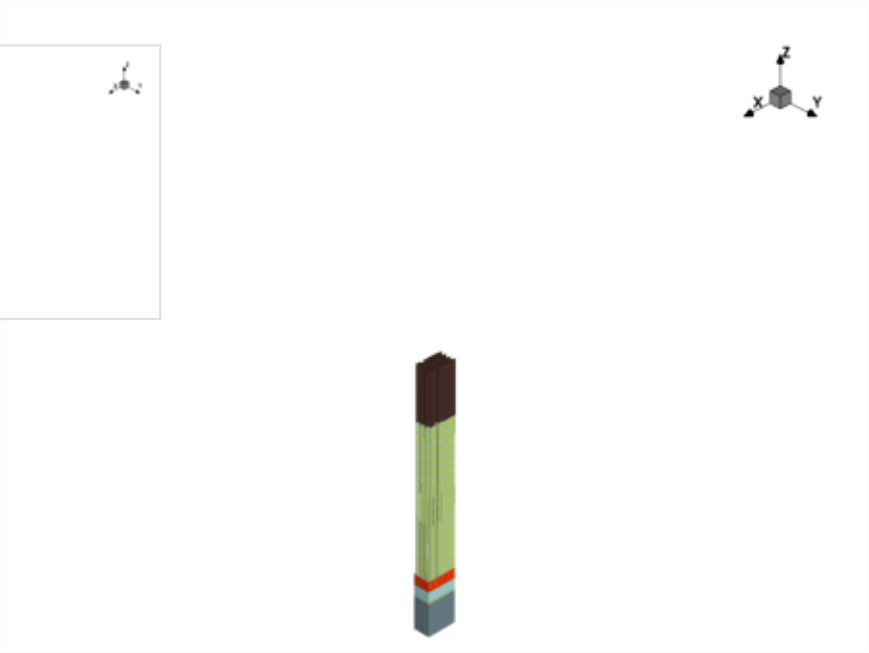

x cut at -0.570 µm

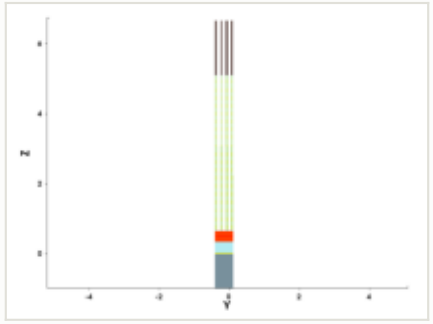

y cut at -0.150 µm

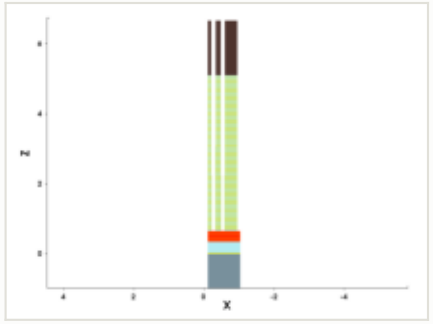

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

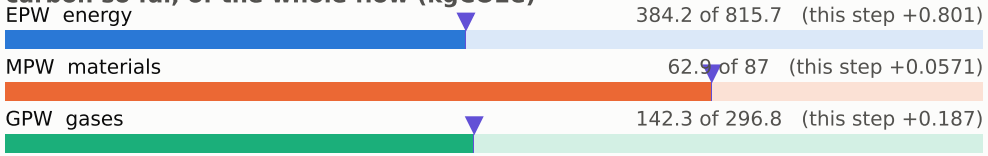

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

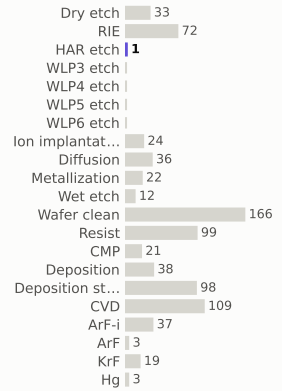

materials deposited (g)

gases emitted (g)

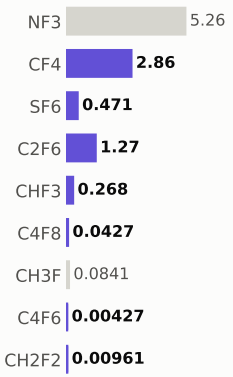

Step #16560.2041: HAR_etch

etch_noop · HAR_etch

1.04	590.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

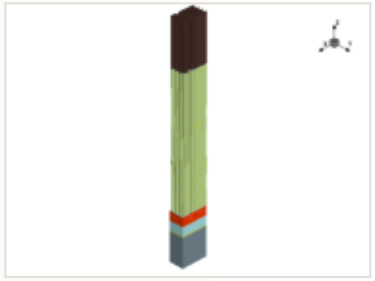

x cut at -0.570 µm

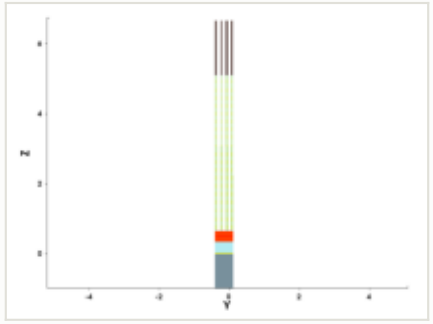

y cut at -0.150 µm

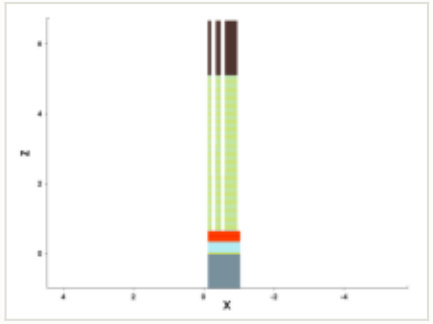

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

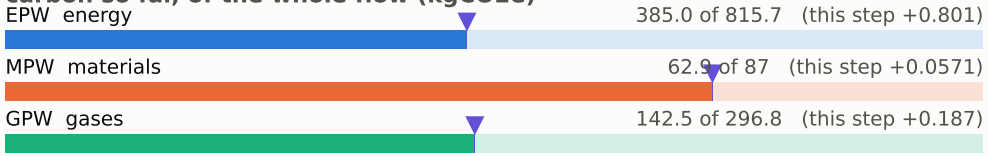

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

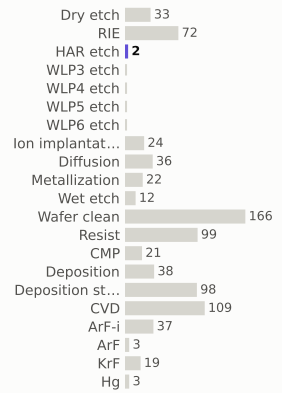

materials deposited (g)

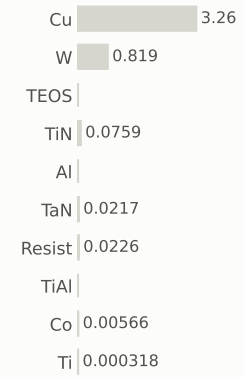

gases emitted (g)

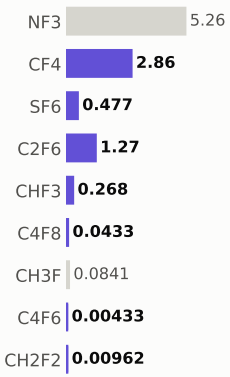

Step #16560.3061: HAR_etch

etch_noop · HAR_etch

1.04	591.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

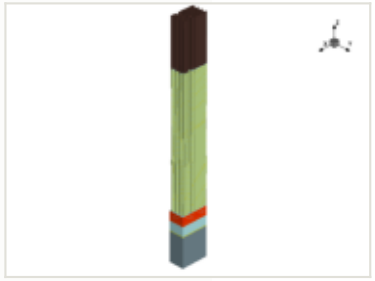

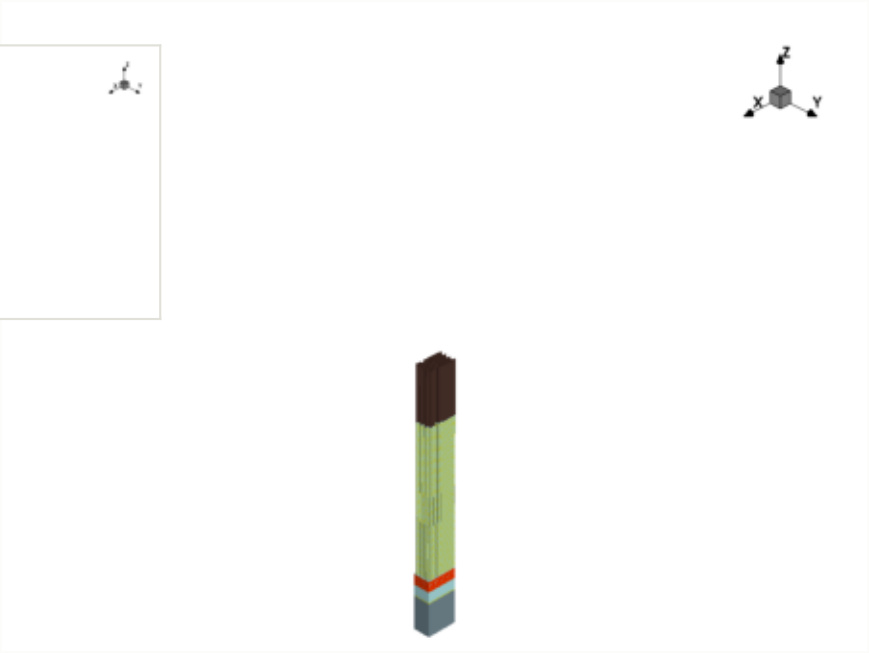

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

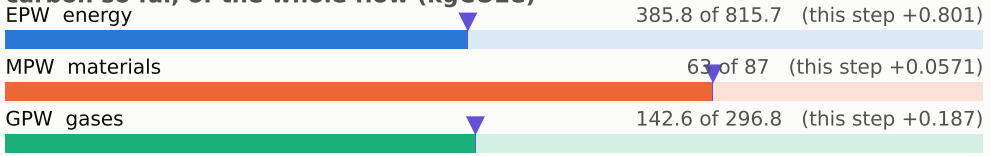

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

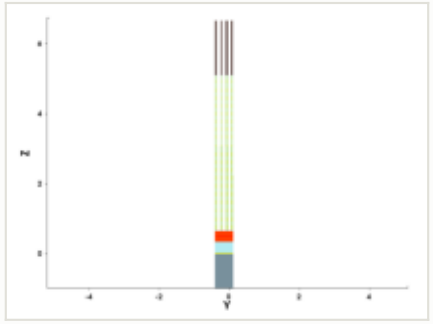

y cut at -0.150 µm

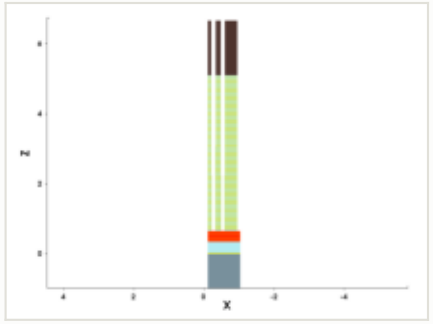

mask for this step

no mask for this step

steps by process area

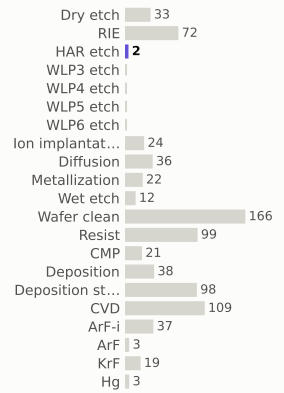

materials deposited (g)

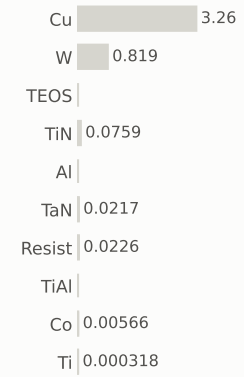

gases emitted (g)

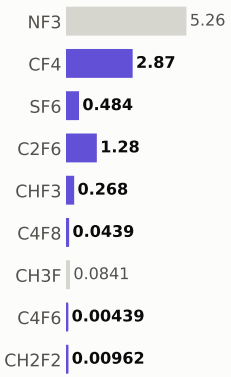

Step #16560.408199999998: HAR_etch

etch_noop · HAR_etch

1.04	592.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

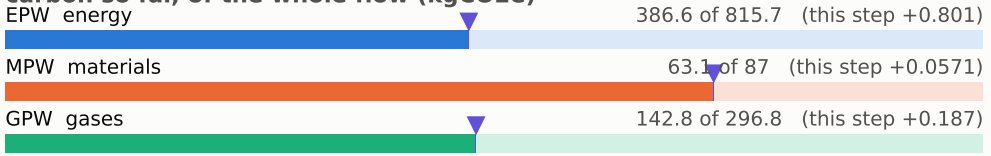

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

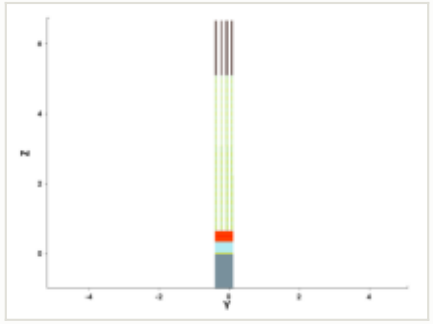

y cut at -0.150 µm

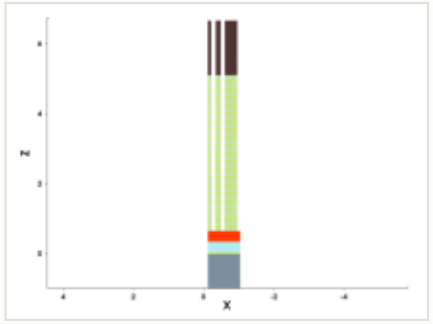

mask for this step

no mask for this step

steps by process area

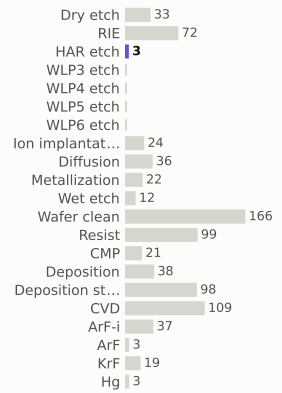

materials deposited (g)

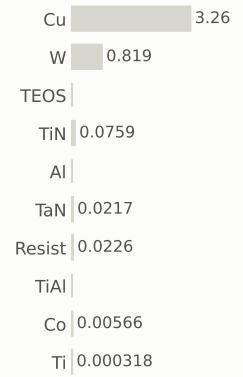

gases emitted (g)

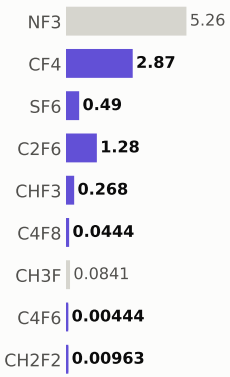

Step #16560.5102: HAR_etch

etch_noop · HAR_etch

1.04	593.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

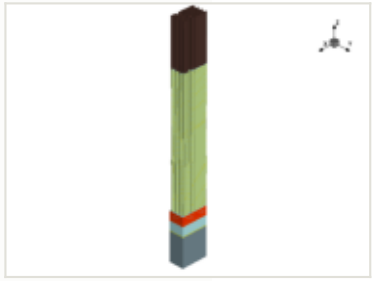

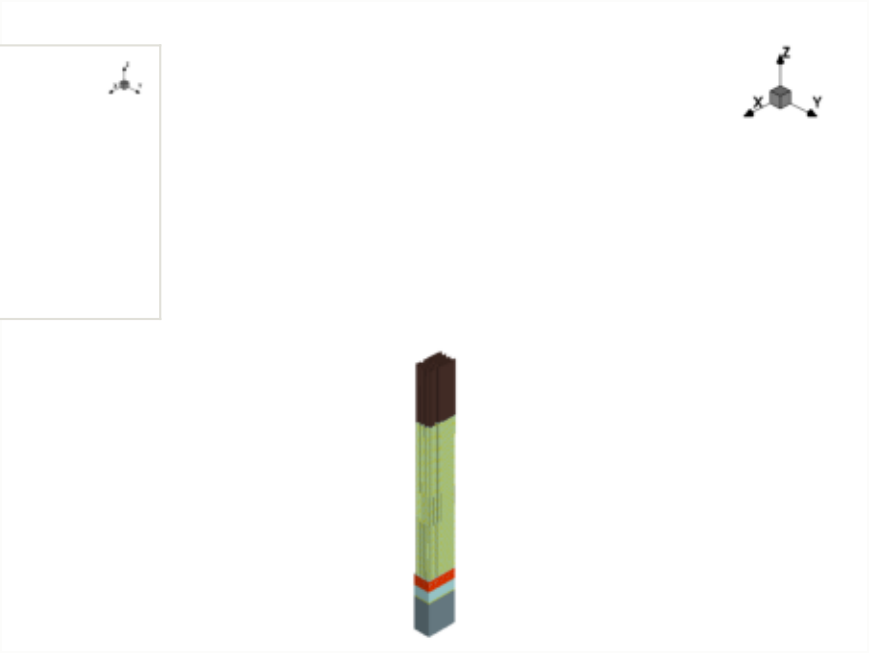

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

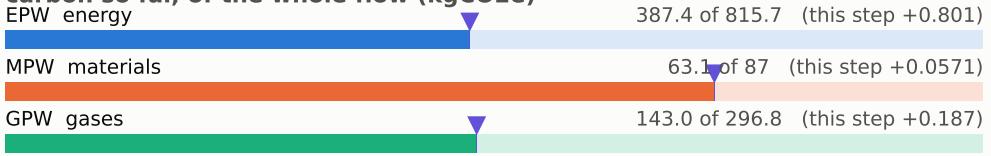

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

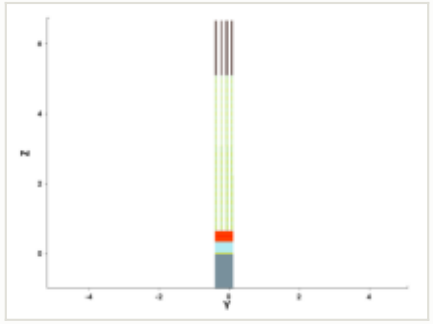

y cut at -0.150 µm

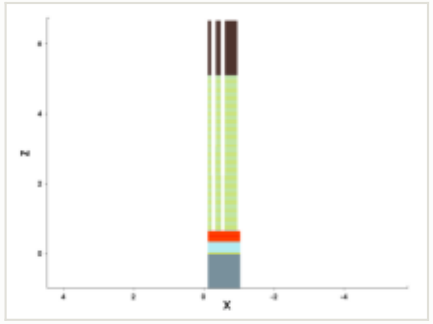

mask for this step

no mask for this step

steps by process area

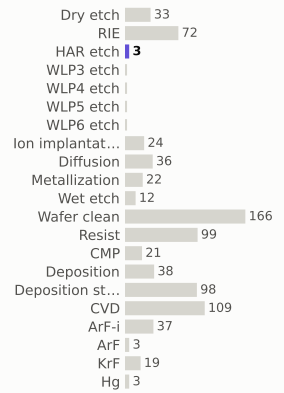

materials deposited (g)

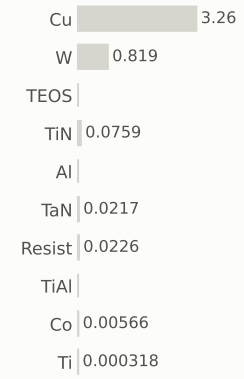

gases emitted (g)

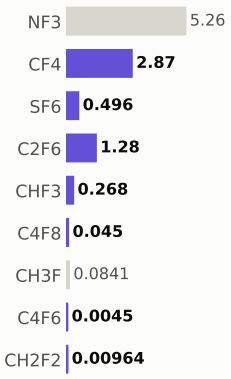

Step #16560.6122: HAR_etch

etch_noop · HAR_etch

1.04	594.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

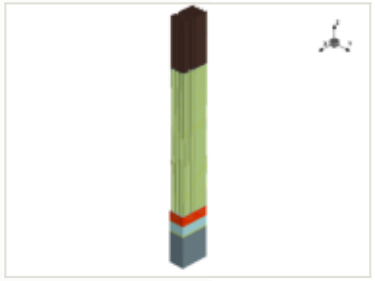

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

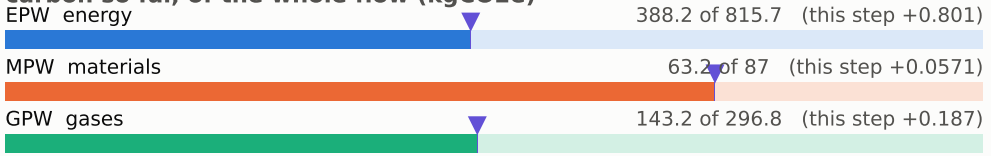

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

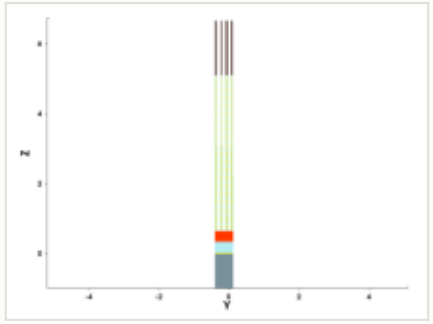

y cut at -0.150 µm

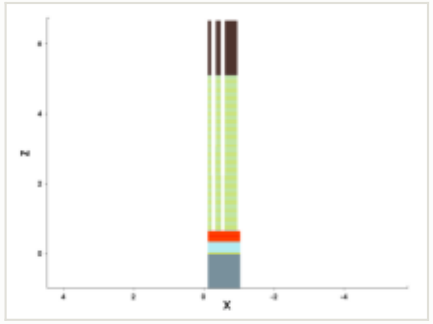

mask for this step

no mask for this step

steps by process area

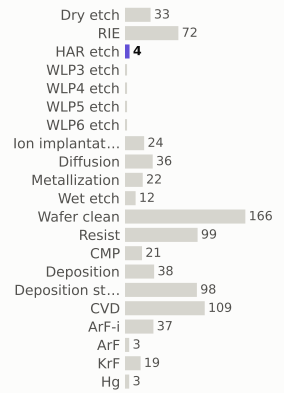

materials deposited (g)

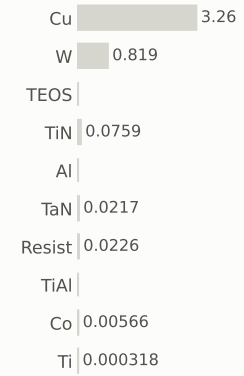

gases emitted (g)

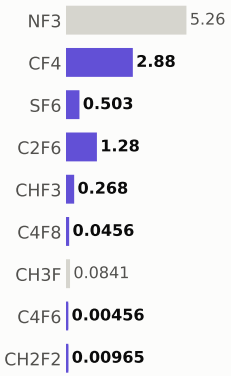

Step #16560.7143: HAR_etch

etch_noop · HAR_etch

1.04	595.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

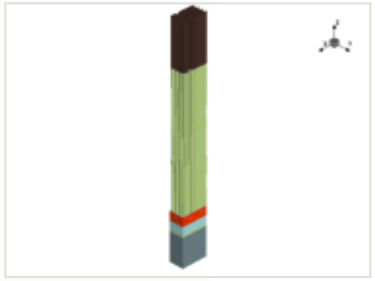

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

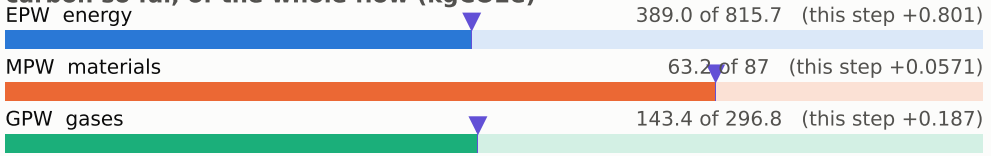

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

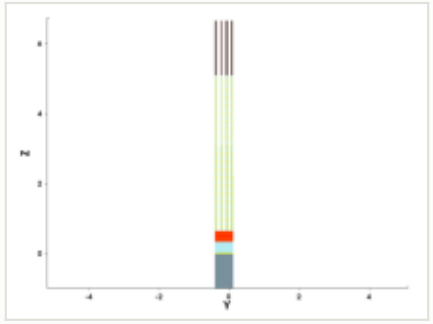

y cut at -0.150 µm

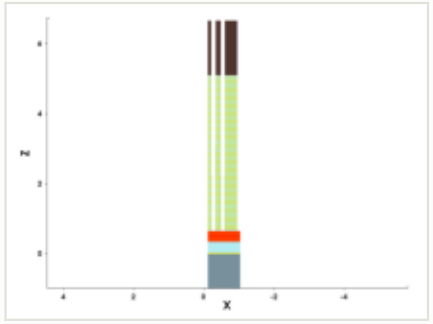

mask for this step

no mask for this step

steps by process area

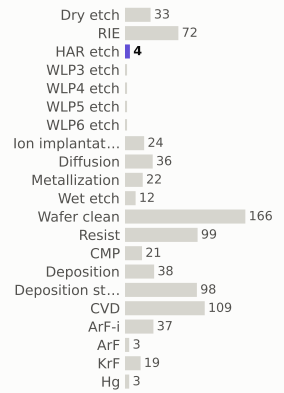

materials deposited (g)

gases emitted (g)

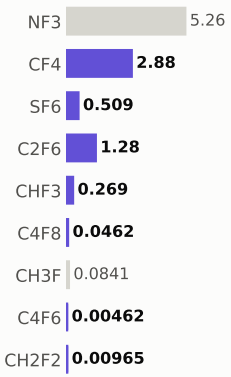

Step #16560.8163: HAR_etch

etch_noop · HAR_etch

1.04	596.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

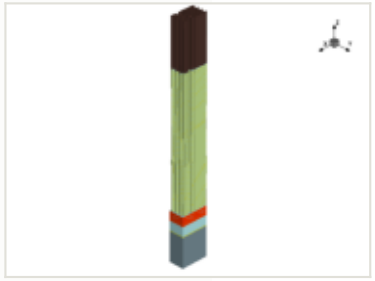

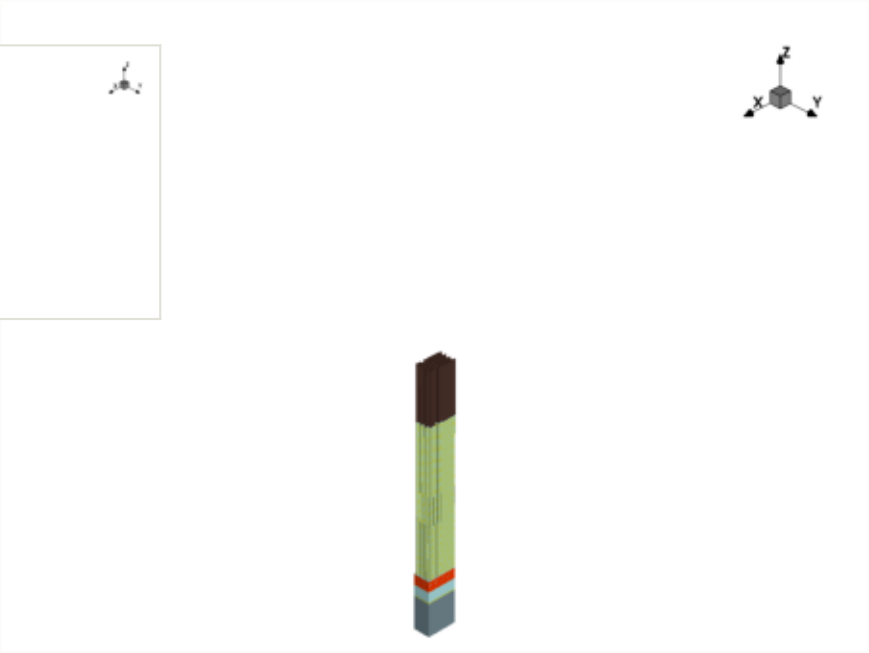

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

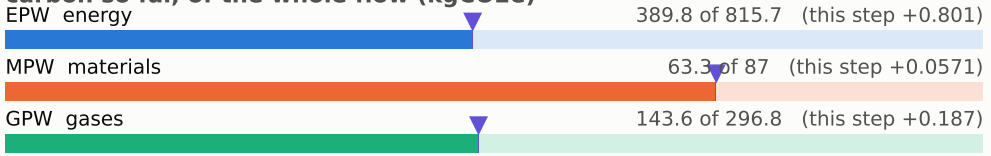

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

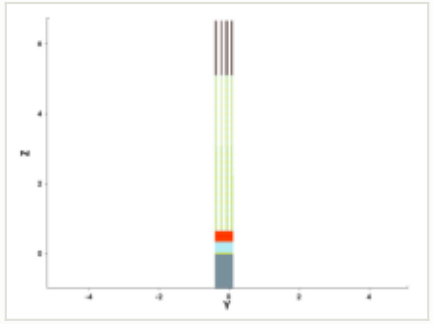

y cut at -0.150 µm

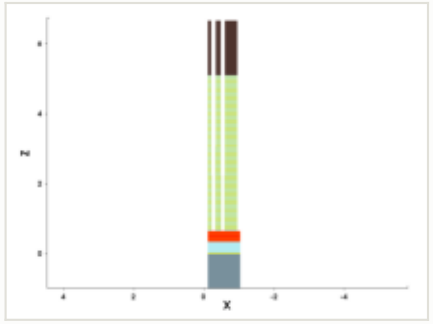

mask for this step

no mask for this step

steps by process area

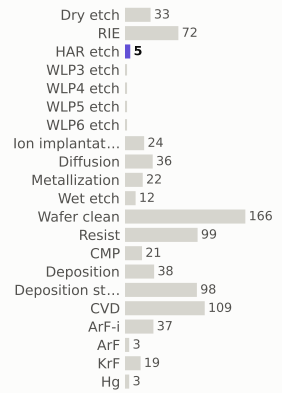

materials deposited (g)

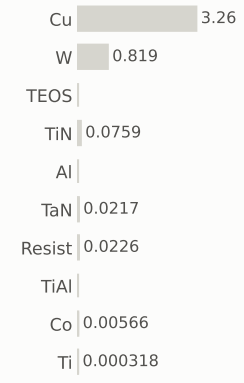

gases emitted (g)

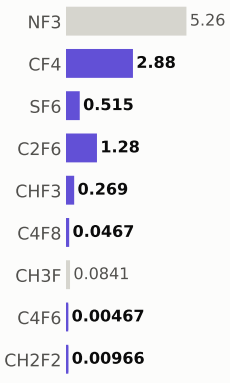

Step #16560.9184: HAR_etch

etch_noop · HAR_etch

1.04	597.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

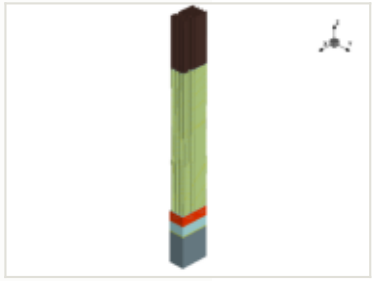

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

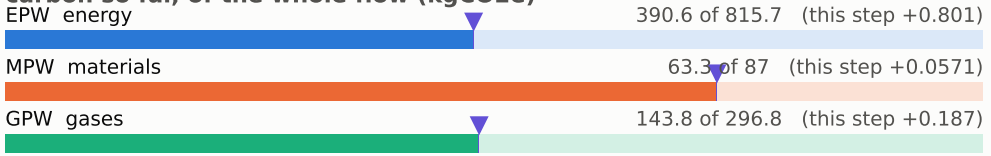

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

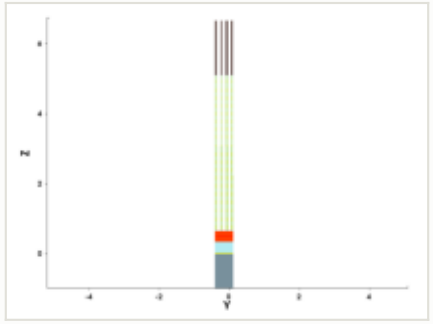

y cut at -0.150 µm

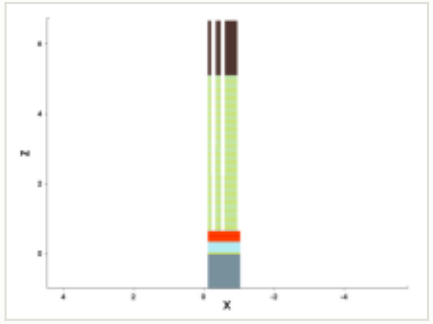

mask for this step

no mask for this step

steps by process area

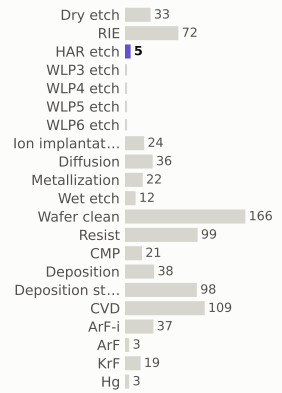

materials deposited (g)

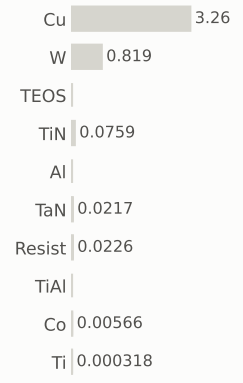

gases emitted (g)

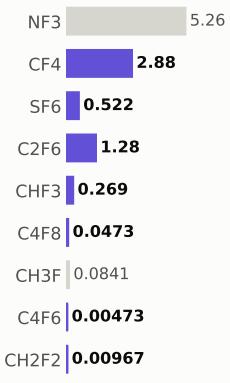

Step #16561.0204: HAR_etch

etch_noop · HAR_etch

1.04	598.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

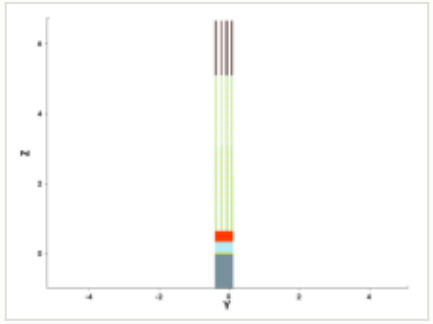

y cut at -0.150 µm

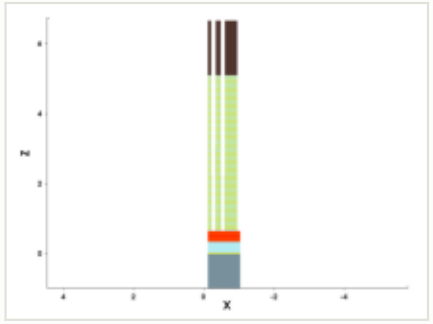

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

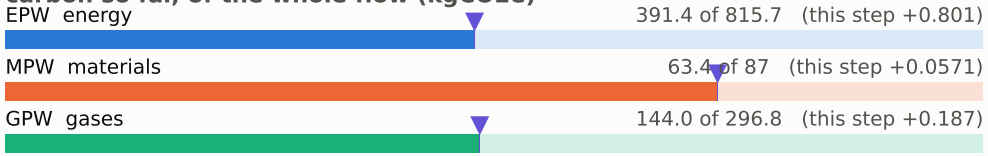

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

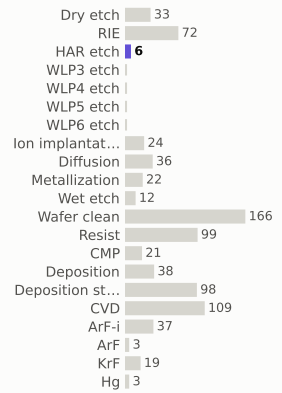

materials deposited (g)

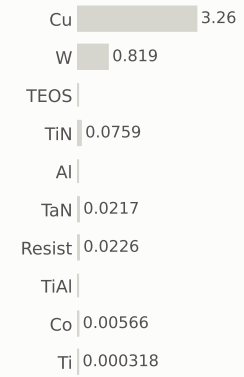

gases emitted (g)

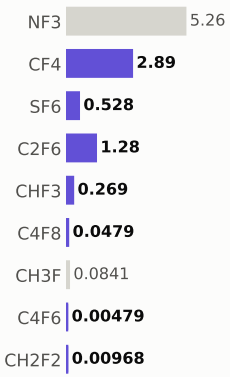

Step #16561.1224: HAR_etch

etch_noop · HAR_etch

1.04	599.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

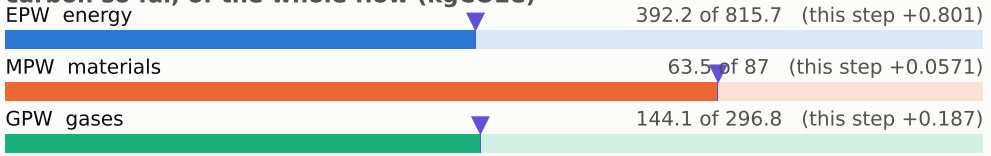

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

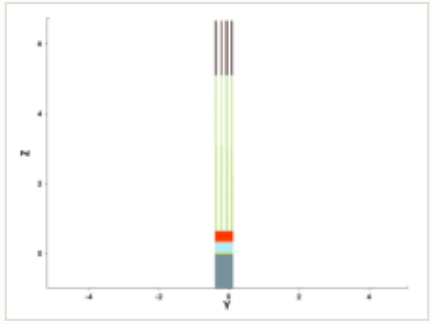

y cut at -0.150 µm

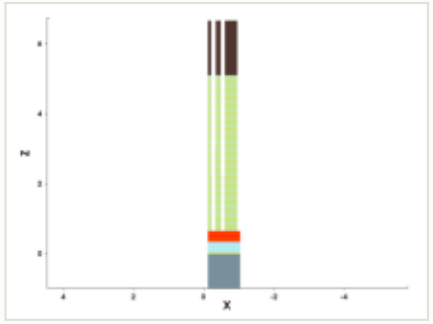

mask for this step

no mask for this step

steps by process area

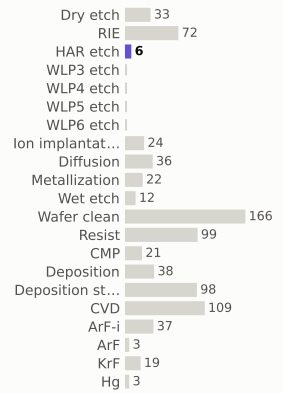

materials deposited (g)

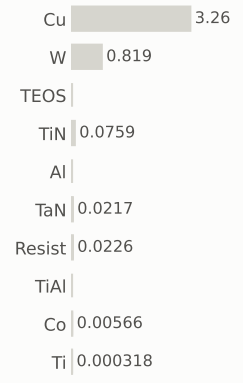

gases emitted (g)

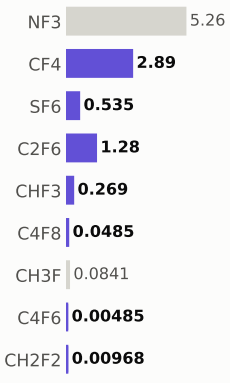

Step #16561.2245: HAR_etch

etch_noop · HAR_etch

1.04	600.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

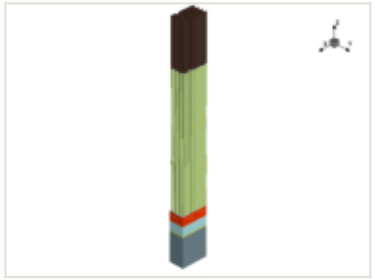

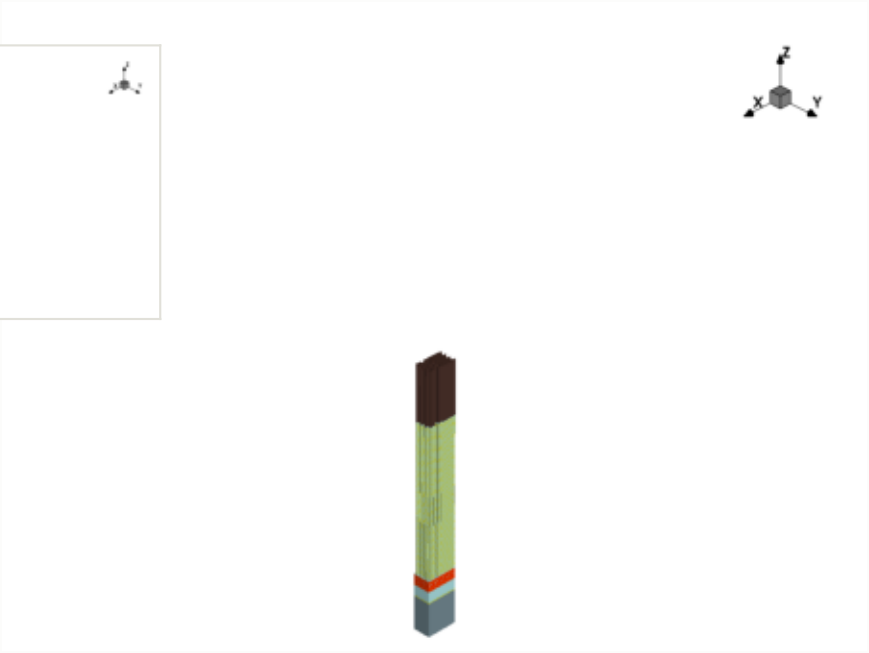

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

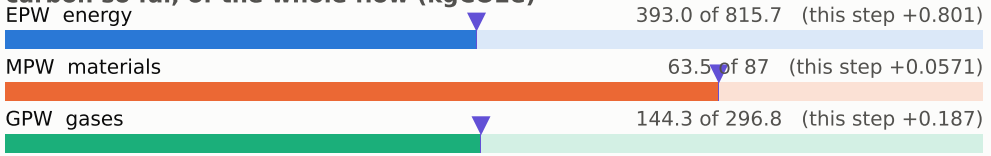

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

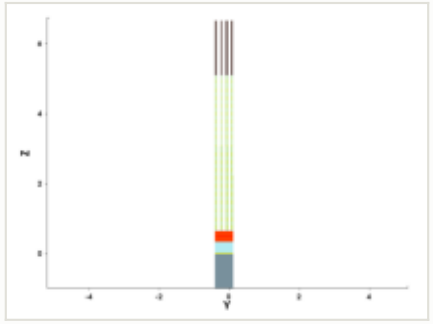

y cut at -0.150 µm

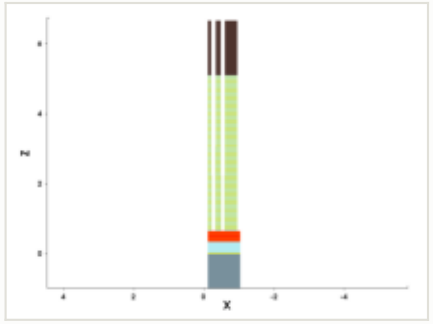

mask for this step

no mask for this step

steps by process area

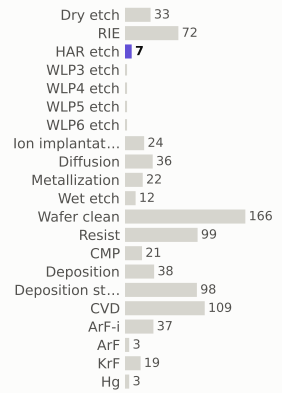

materials deposited (g)

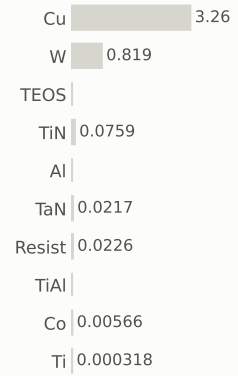

gases emitted (g)

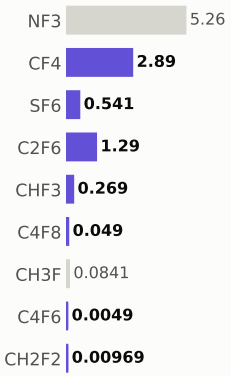

Step #16561.3265: HAR_etch

etch_noop · HAR_etch

1.04	601.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

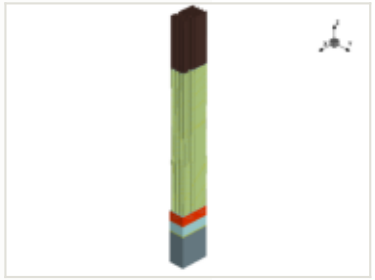

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

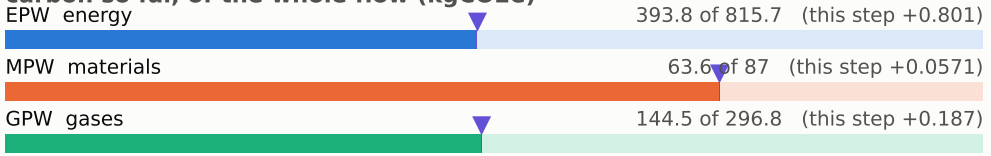

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

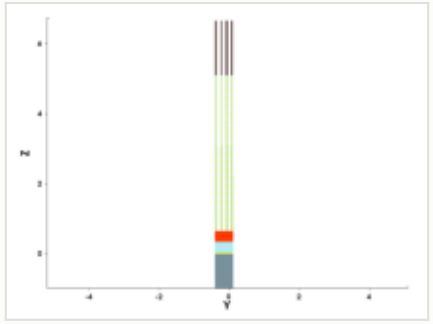

y cut at -0.150 µm

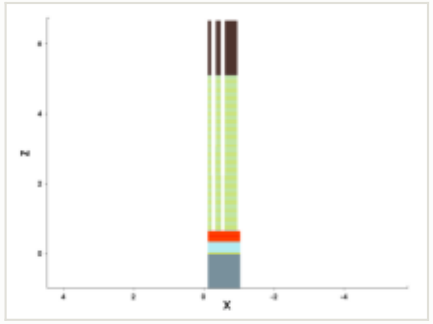

mask for this step

no mask for this step

steps by process area

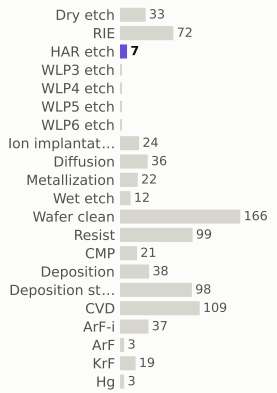

materials deposited (g)

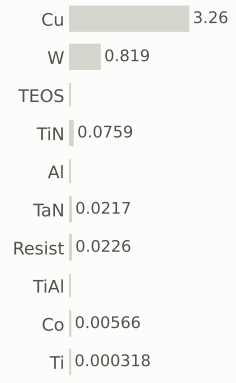

gases emitted (g)

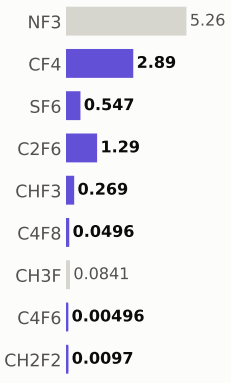

Step #16561.4286: HAR_etch

etch_noop · HAR_etch

1.04	602.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

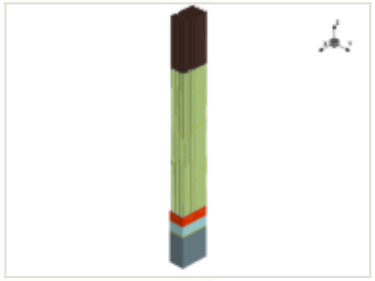

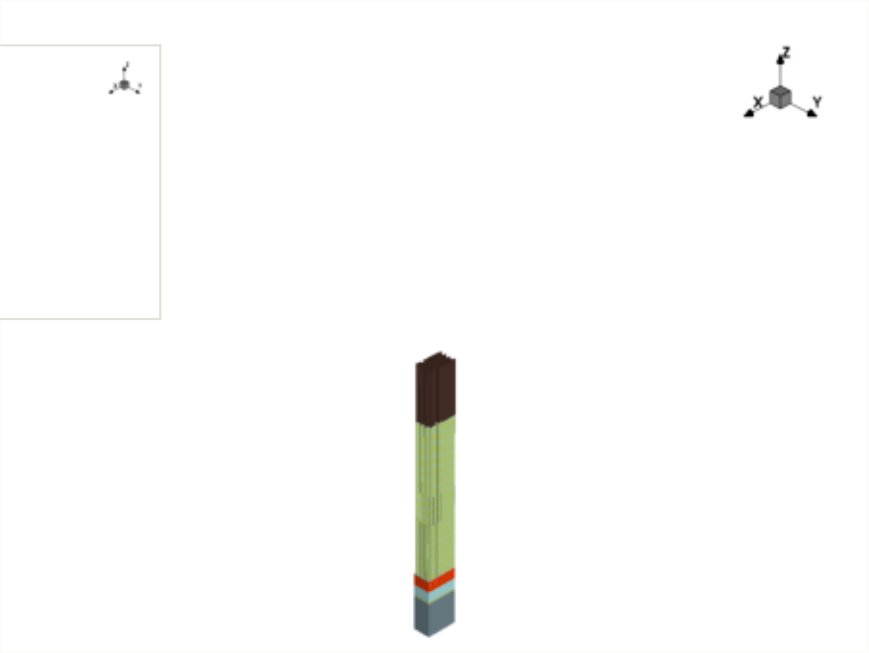

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

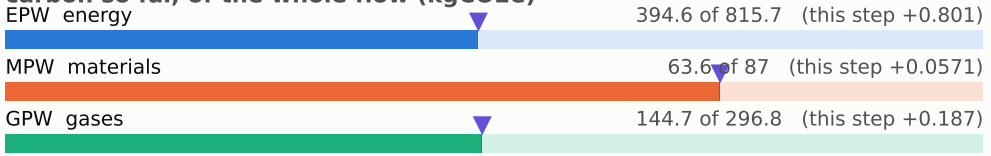

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

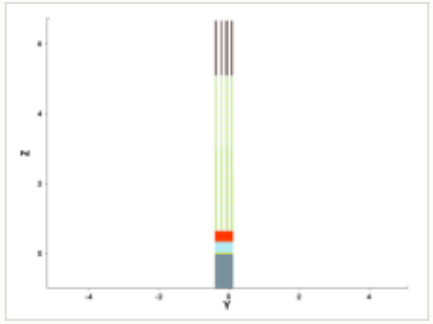

y cut at -0.150 µm

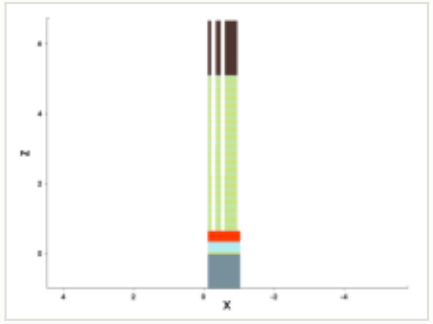

mask for this step

no mask for this step

steps by process area

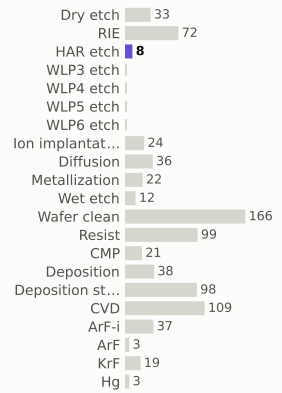

materials deposited (g)

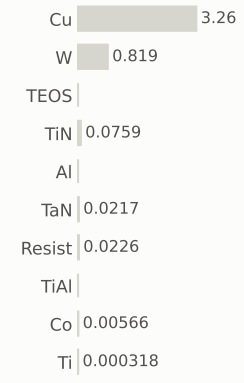

gases emitted (g)

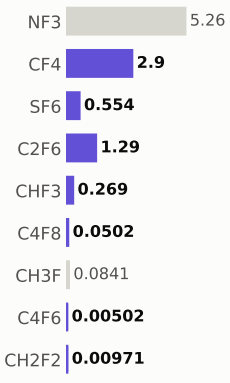

Step #16561.5306: HAR_etch

etch_noop · HAR_etch

1.04	604.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

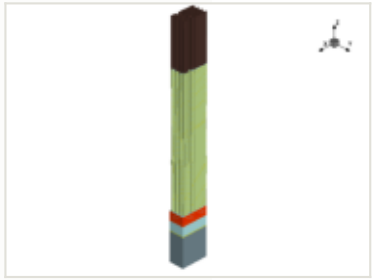

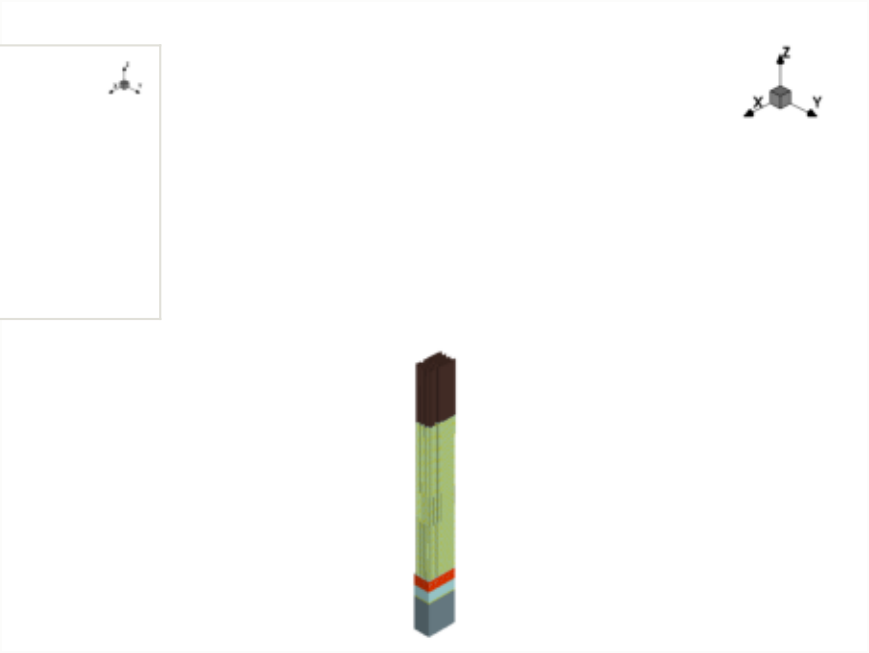

x cut at -0.570 µm

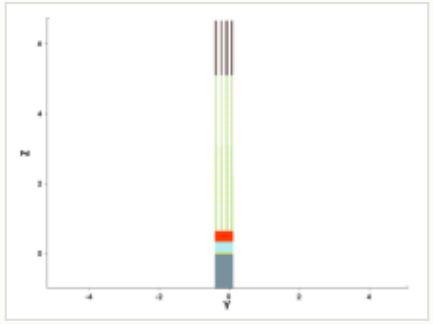

y cut at -0.150 µm

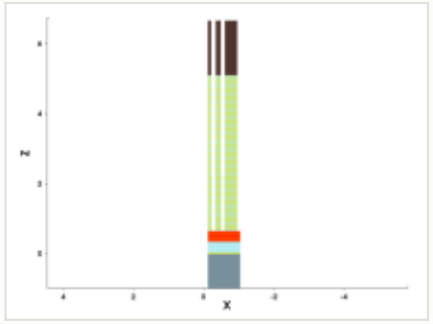

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

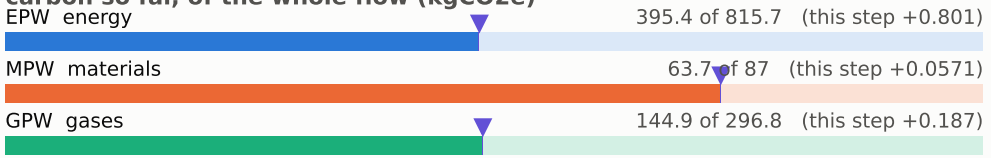

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

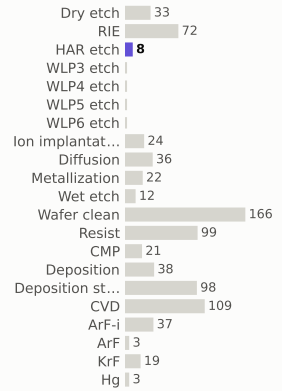

materials deposited (g)

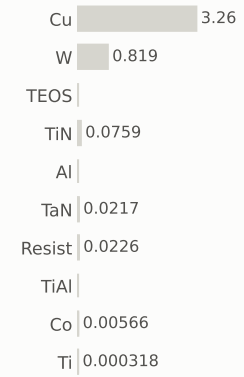

gases emitted (g)

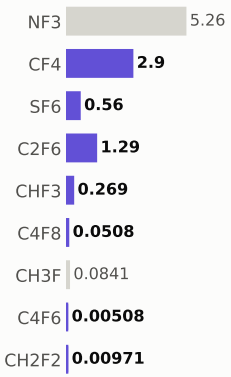

Step #16561.632700000002: HAR_etch

etch_noop · HAR_etch

1.04	605.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

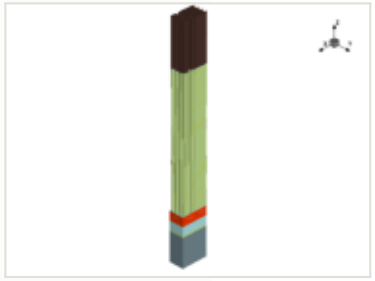

x cut at -0.570 µm

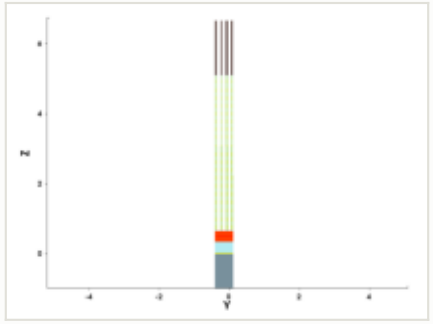

y cut at -0.150 µm

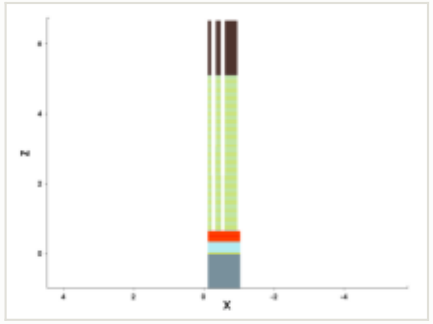

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

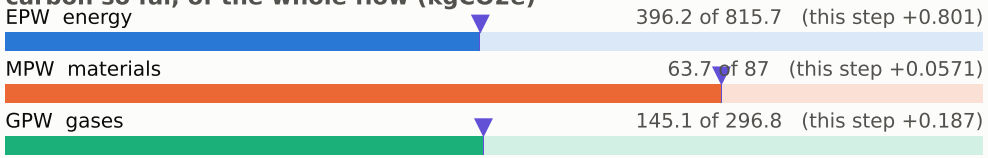

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

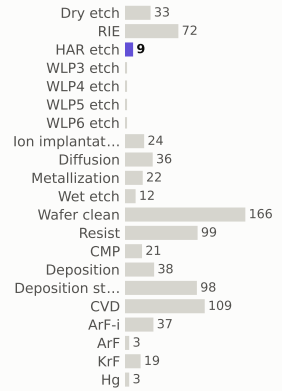

materials deposited (g)

gases emitted (g)

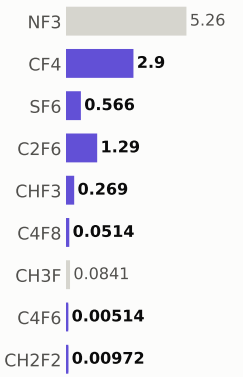

Step #16561.7347: HAR_etch

etch_noop · HAR_etch

1.04	606.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

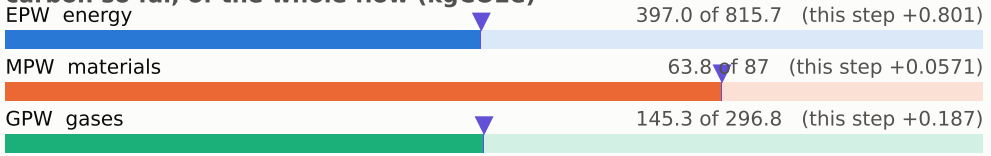

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

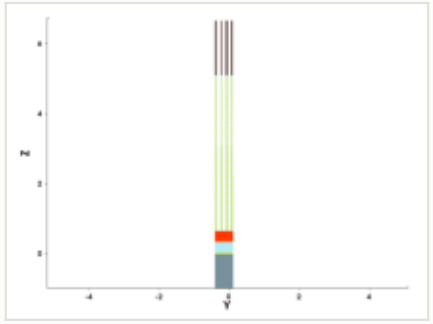

y cut at -0.150 µm

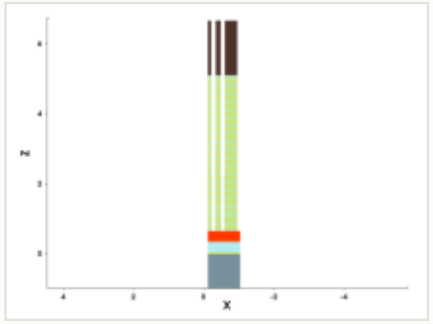

mask for this step

no mask for this step

steps by process area

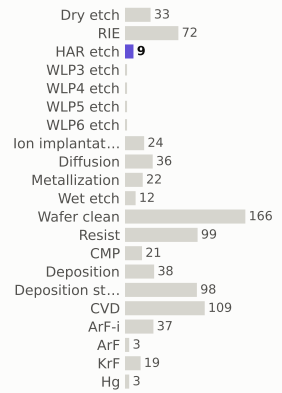

materials deposited (g)

gases emitted (g)

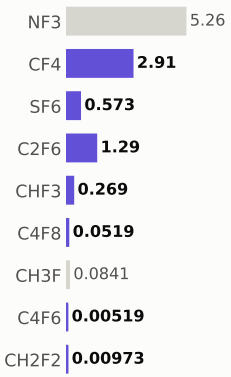

Step #16561.8367: HAR_etch

etch_noop · HAR_etch

1.04	607.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

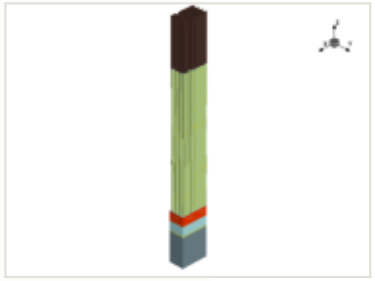

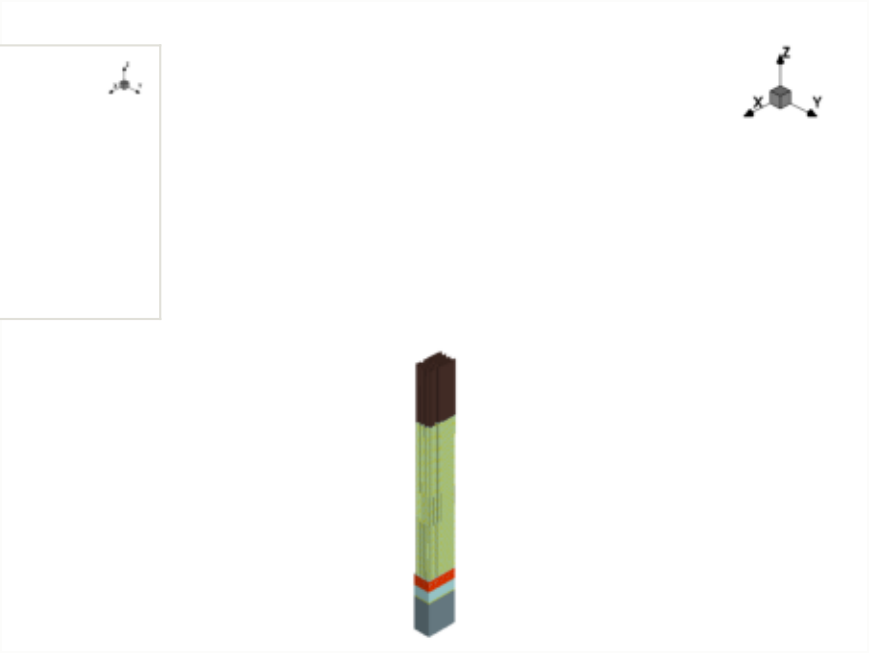

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

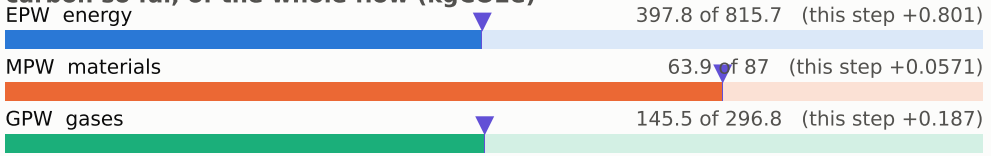

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

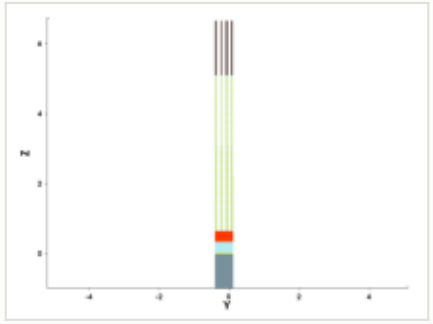

y cut at -0.150 µm

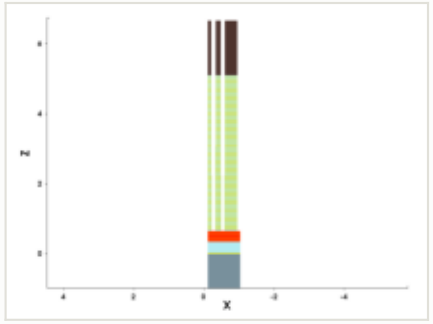

mask for this step

no mask for this step

steps by process area

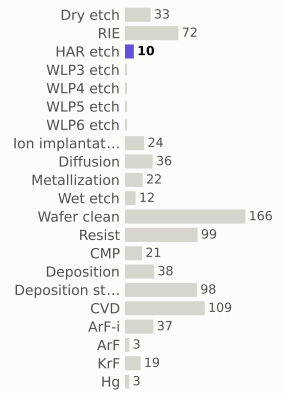

materials deposited (g)

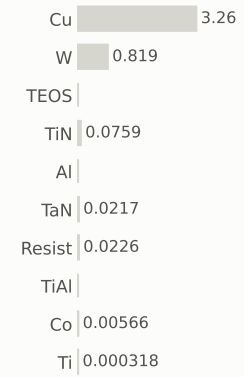

gases emitted (g)

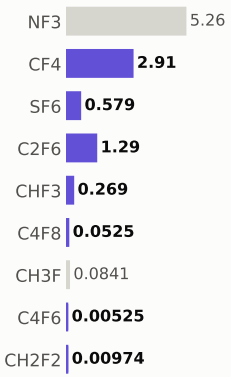

Step #16561.9388: HAR_etch

etch_noop · HAR_etch

1.04	608.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

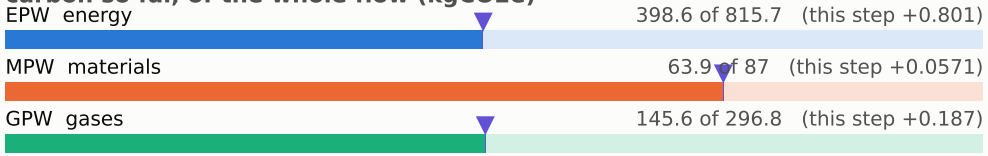

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

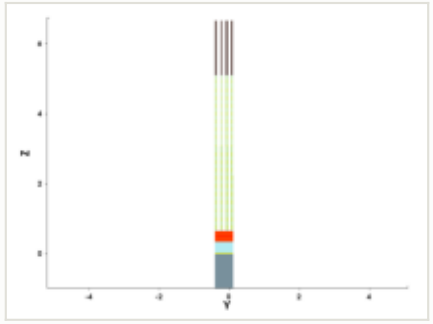

y cut at -0.150 µm

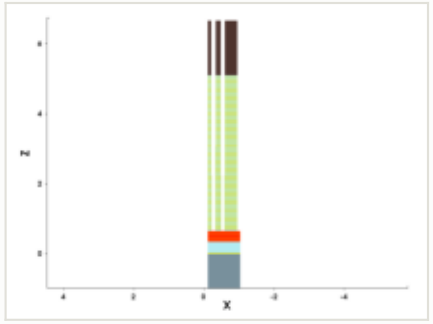

mask for this step

no mask for this step

steps by process area

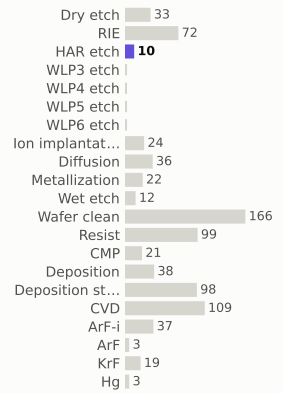

materials deposited (g)

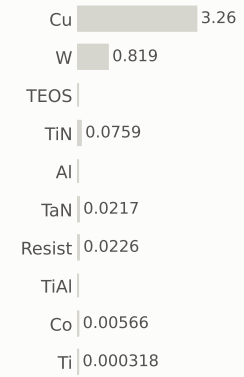

gases emitted (g)

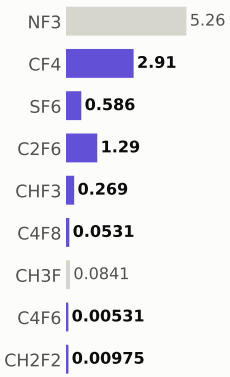

Step #16562.0408: HAR_etch

etch_noop · HAR_etch

1.04	609.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

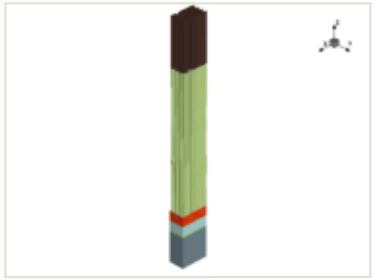

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

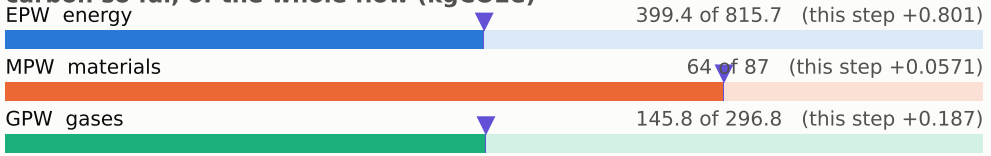

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

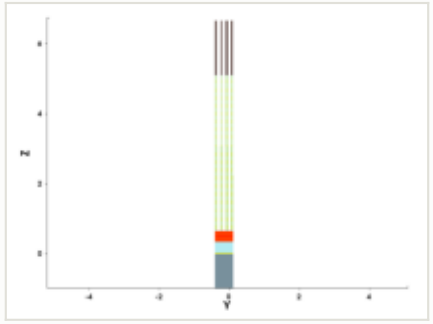

y cut at -0.150 µm

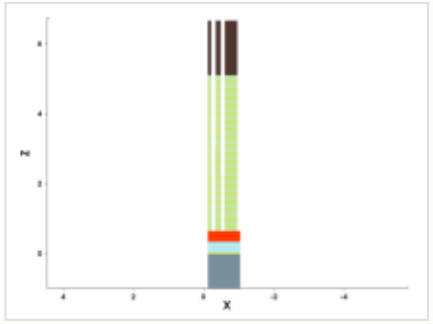

mask for this step

no mask for this step

steps by process area

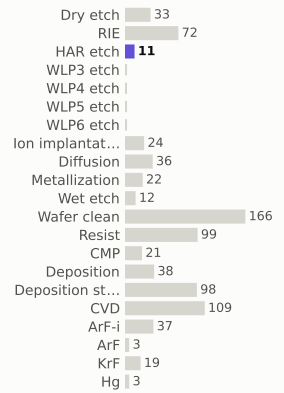

materials deposited (g)

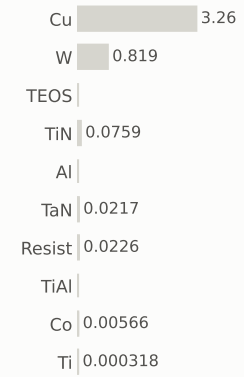

gases emitted (g)

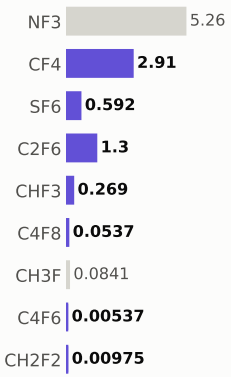

Step #16562.1429: HAR_etch

etch_noop · HAR_etch

1.04	610.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

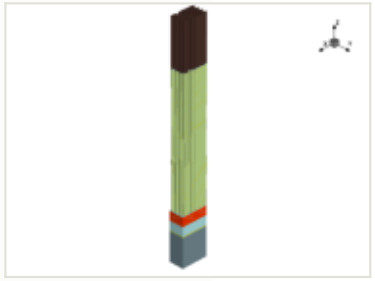

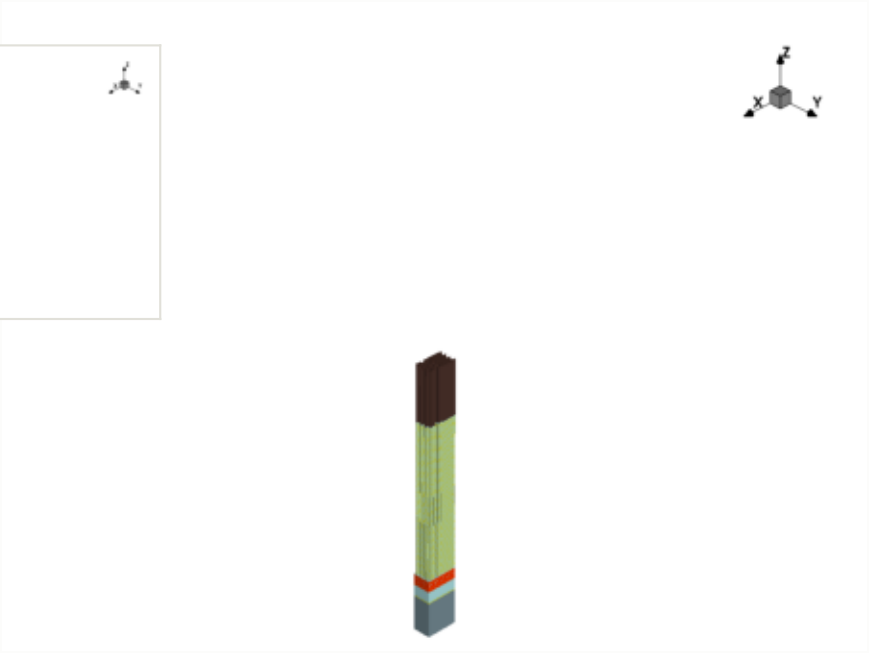

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

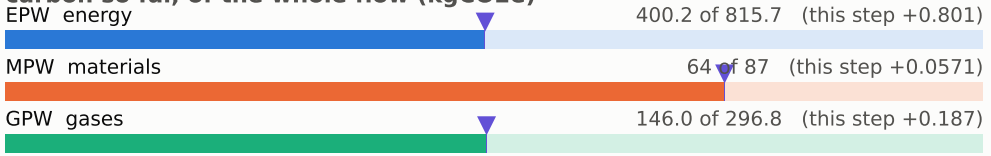

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

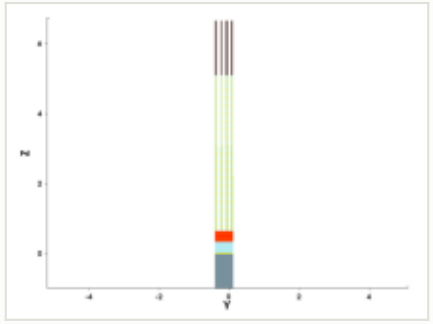

y cut at -0.150 µm

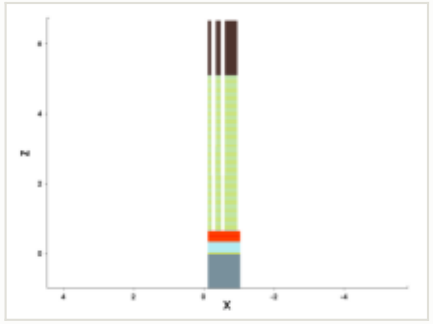

mask for this step

no mask for this step

steps by process area

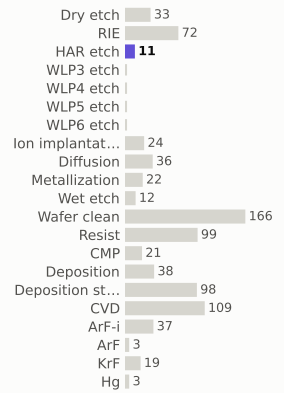

materials deposited (g)

gases emitted (g)

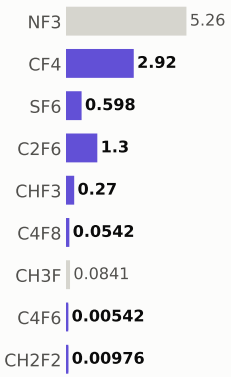

Step #16562.244899999998: HAR_etch

etch_noop · HAR_etch

1.04	611.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

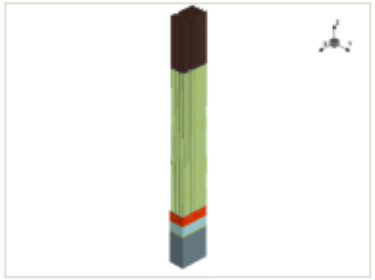

x cut at -0.570 µm

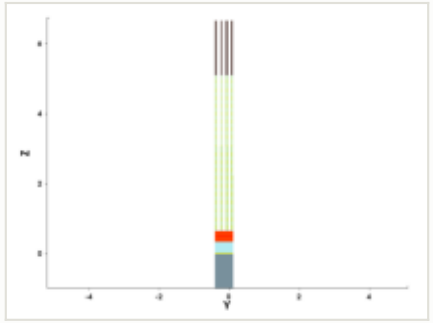

y cut at -0.150 µm

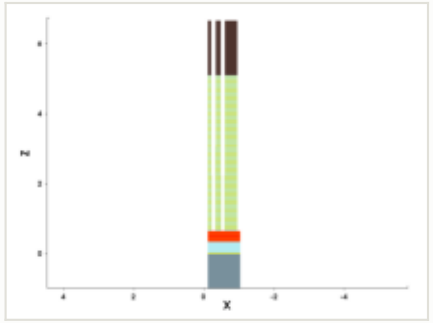

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

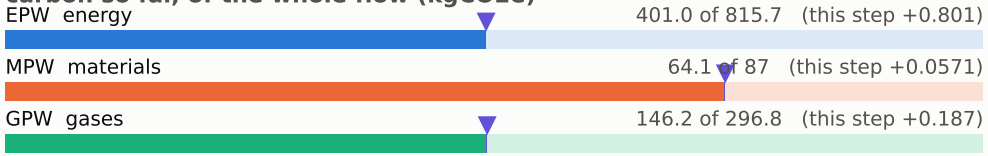

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

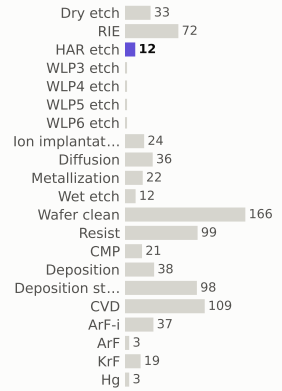

materials deposited (g)

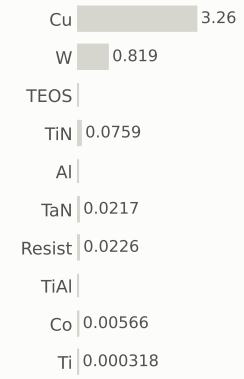

gases emitted (g)

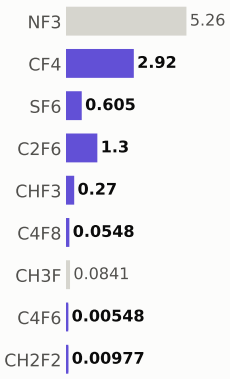

Step #16562.3469: HAR_etch

etch_noop · HAR_etch

1.04	612.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

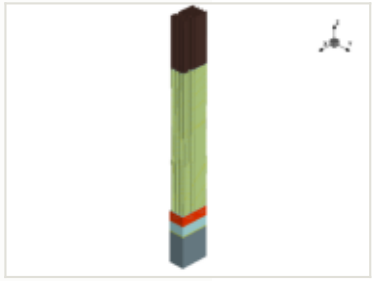

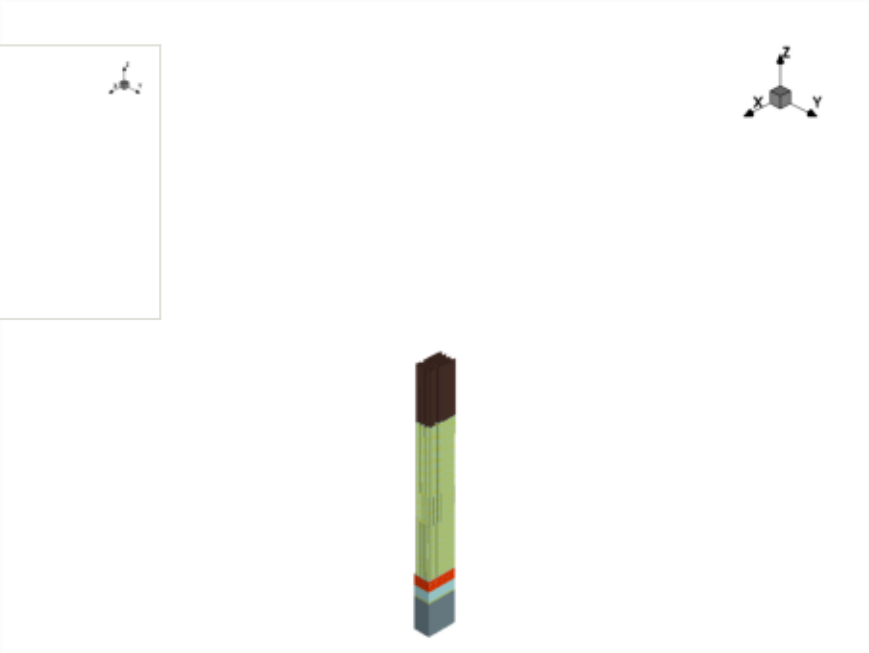

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

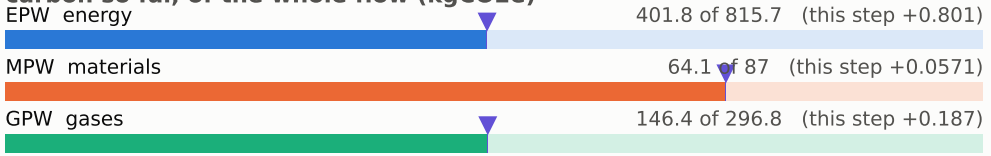

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

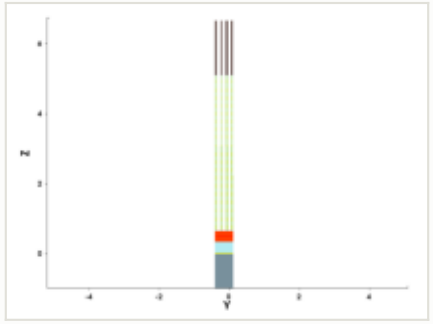

y cut at -0.150 µm

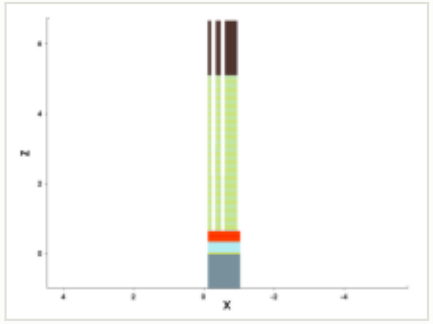

mask for this step

no mask for this step

steps by process area

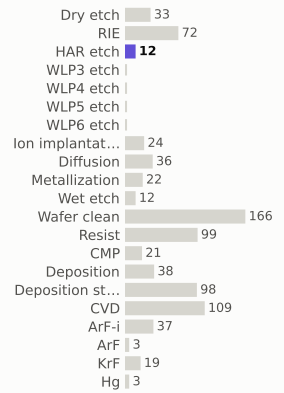

materials deposited (g)

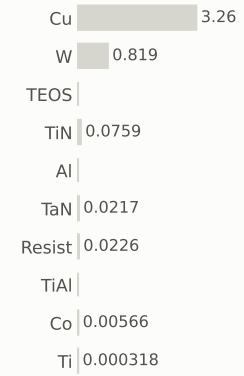

gases emitted (g)

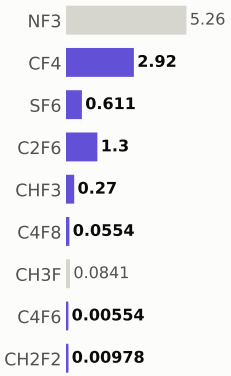

Step #16562.449: HAR_etch

etch_noop · HAR_etch

1.04	613.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

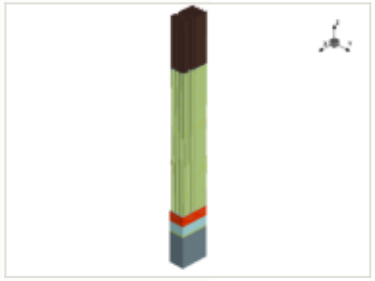

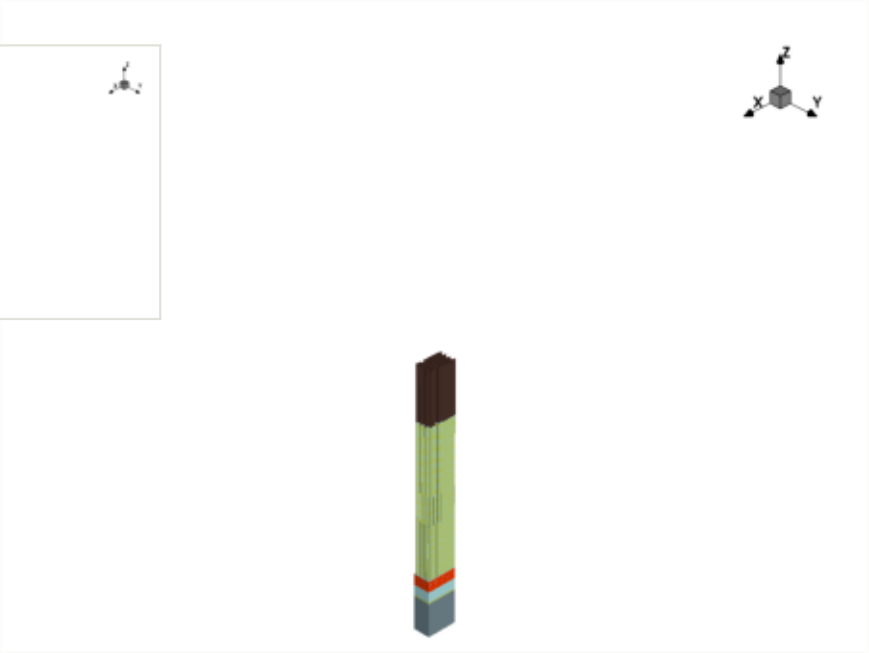

x cut at -0.570 µm

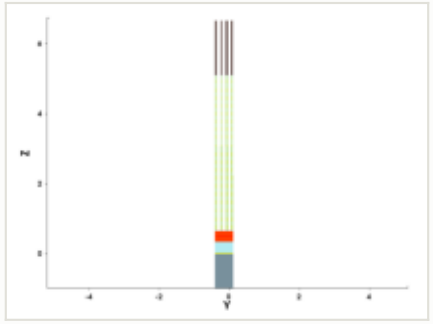

y cut at -0.150 µm

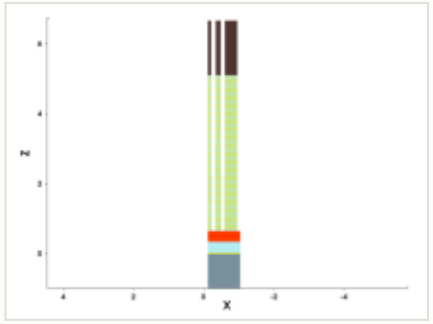

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

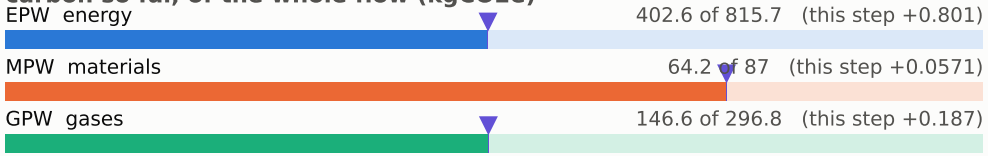

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

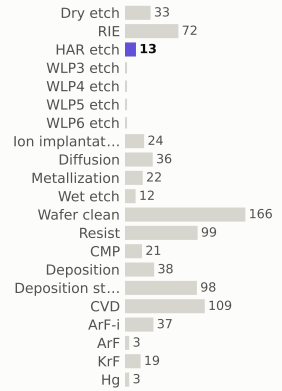

materials deposited (g)

gases emitted (g)

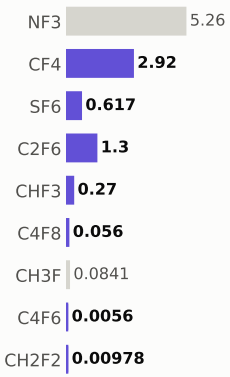

Step #16562.551: HAR_etch

etch_noop · HAR_etch

1.04	614.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

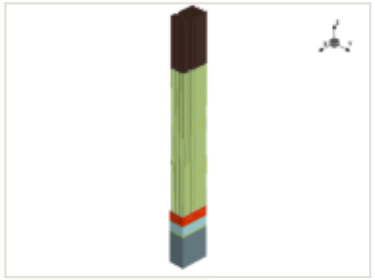

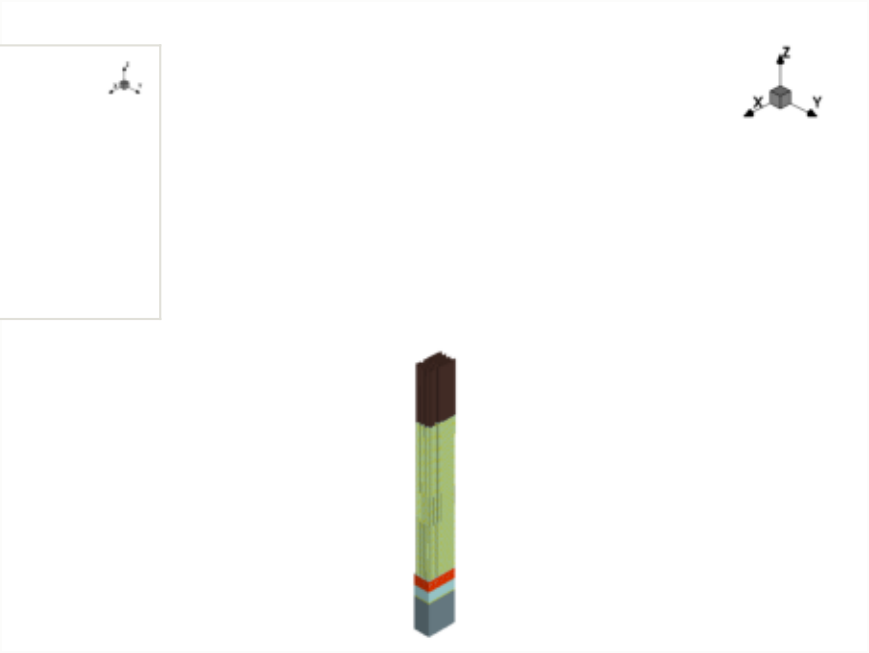

x cut at -0.570 µm

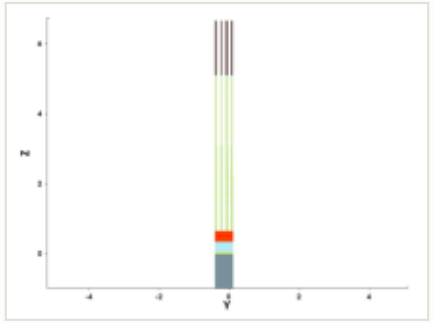

y cut at -0.150 µm

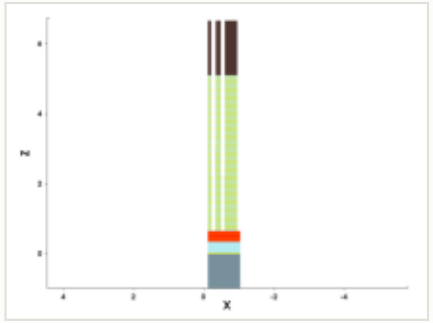

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

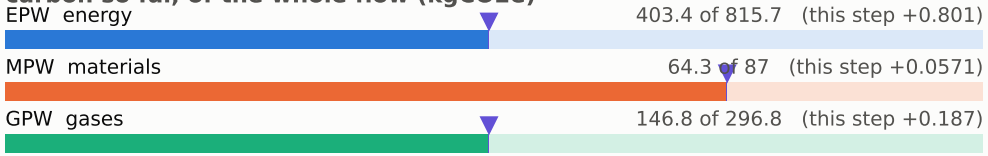

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

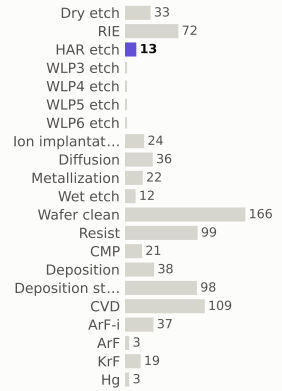

materials deposited (g)

gases emitted (g)

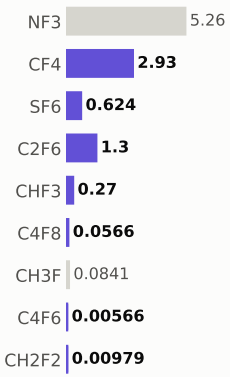

Step #16562.6531: HAR_etch

etch_noop · HAR_etch

1.04	615.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

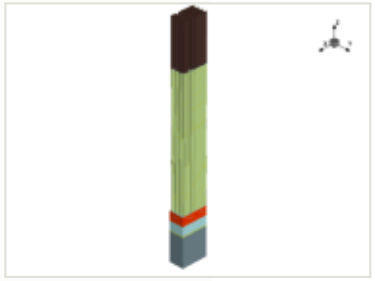

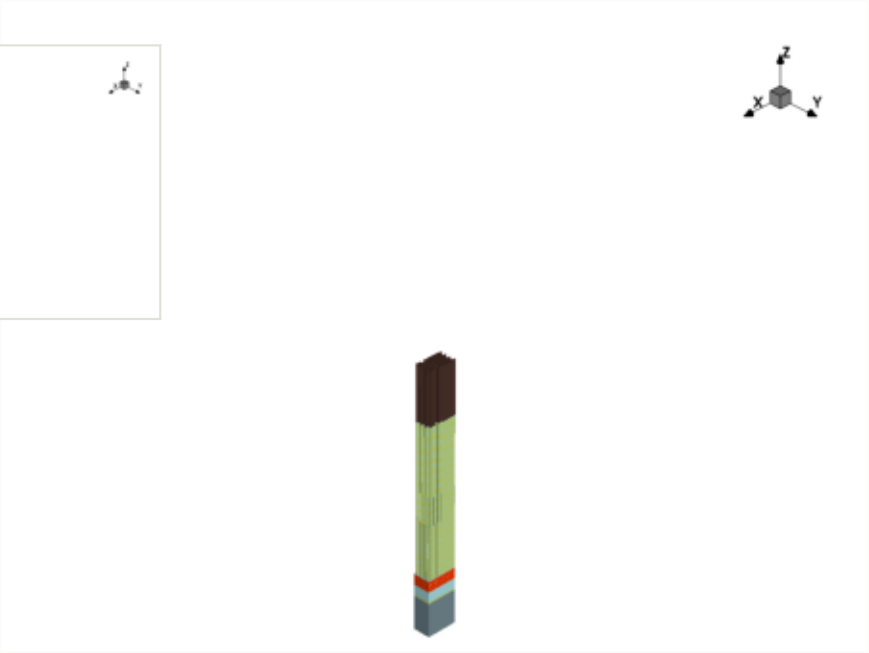

x cut at -0.570 µm

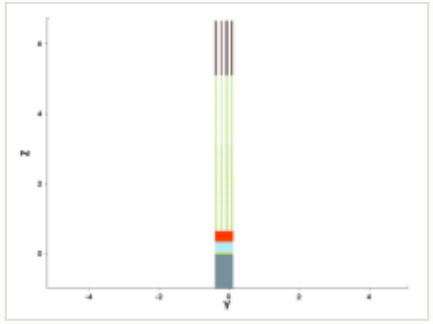

y cut at -0.150 µm

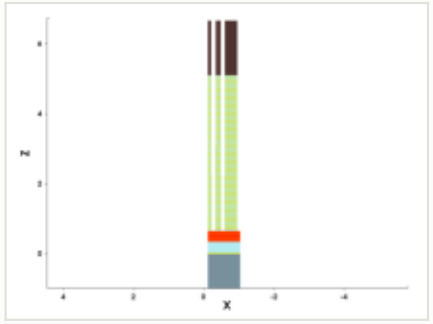

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

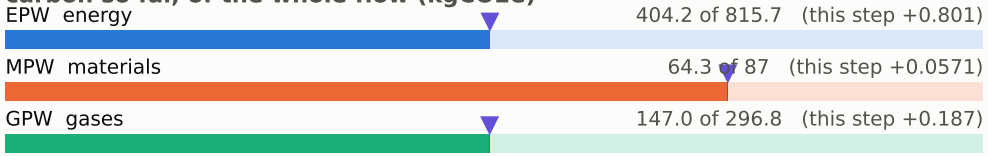

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

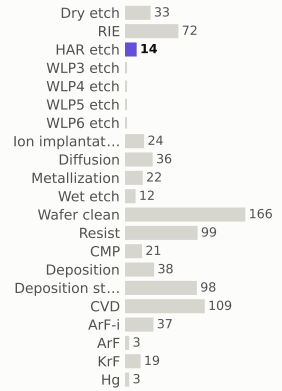

materials deposited (g)

gases emitted (g)

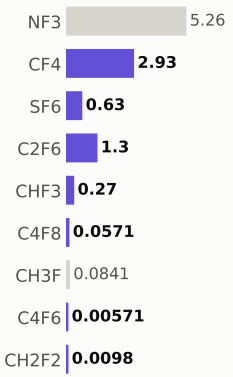

Step #16562.755100000002: HAR_etch

etch_noop · HAR_etch

1.04	616.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

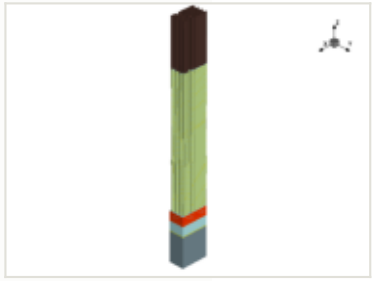

x cut at -0.570 µm

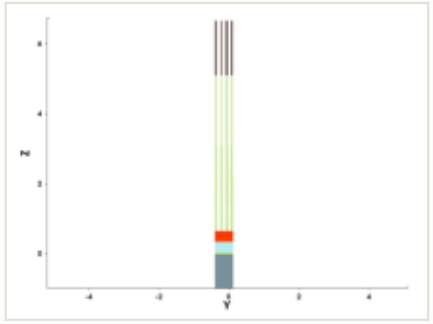

y cut at -0.150 µm

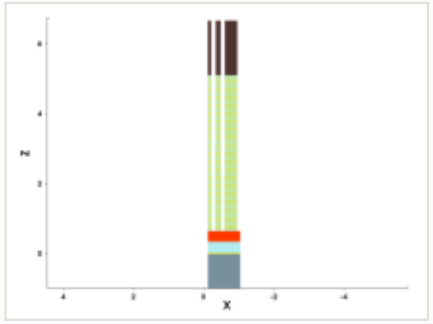

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

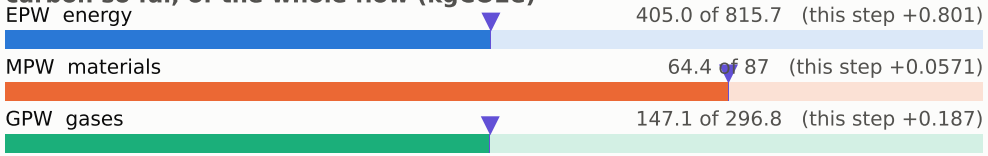

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

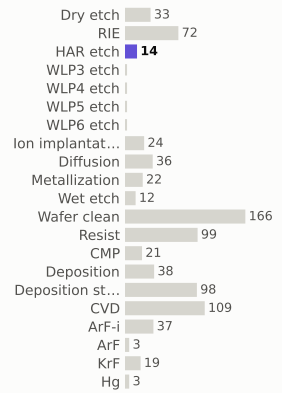

materials deposited (g)

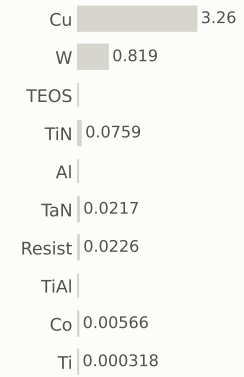

gases emitted (g)

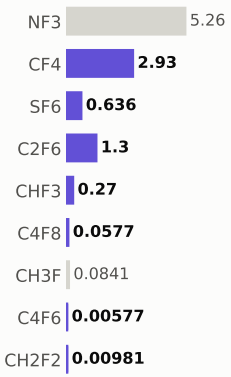

Step #16562.8571: HAR_etch

etch_noop · HAR_etch

1.04	617.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

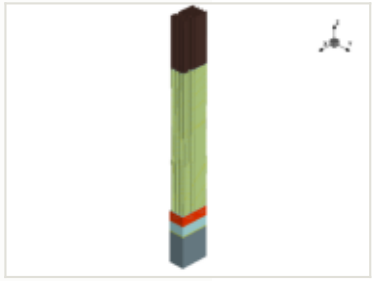

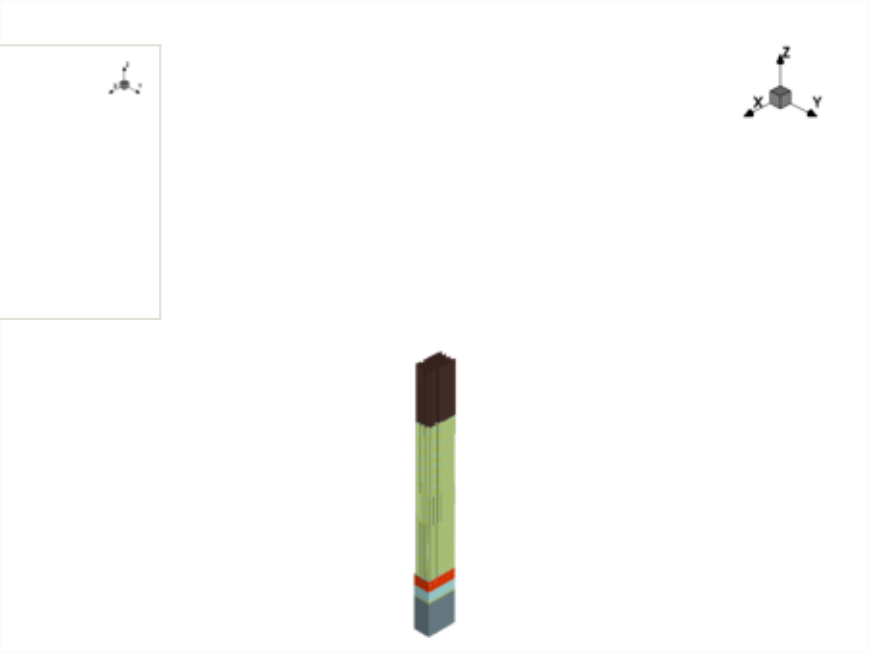

x cut at -0.570 µm

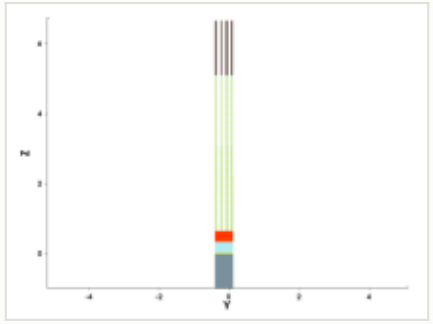

y cut at -0.150 µm

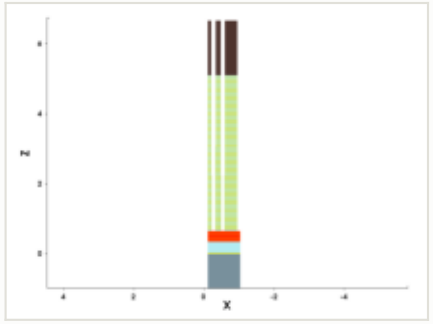

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

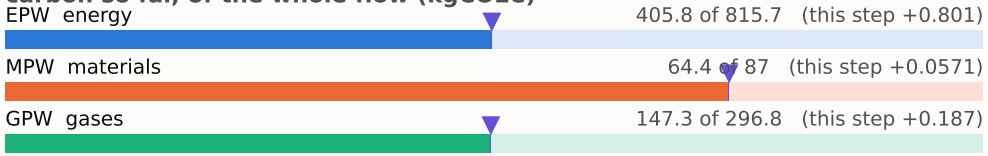

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

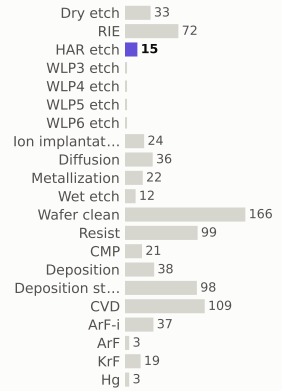

materials deposited (g)

gases emitted (g)

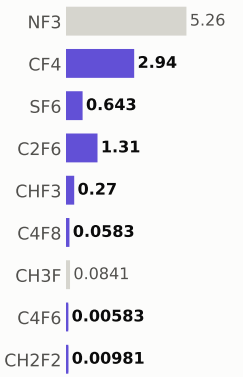

Step #16562.9592: HAR_etch

etch_noop · HAR_etch

1.04	618.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

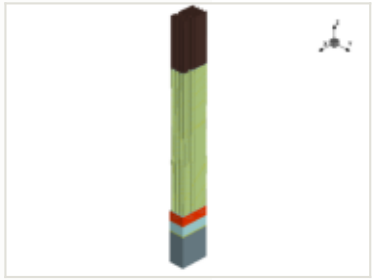

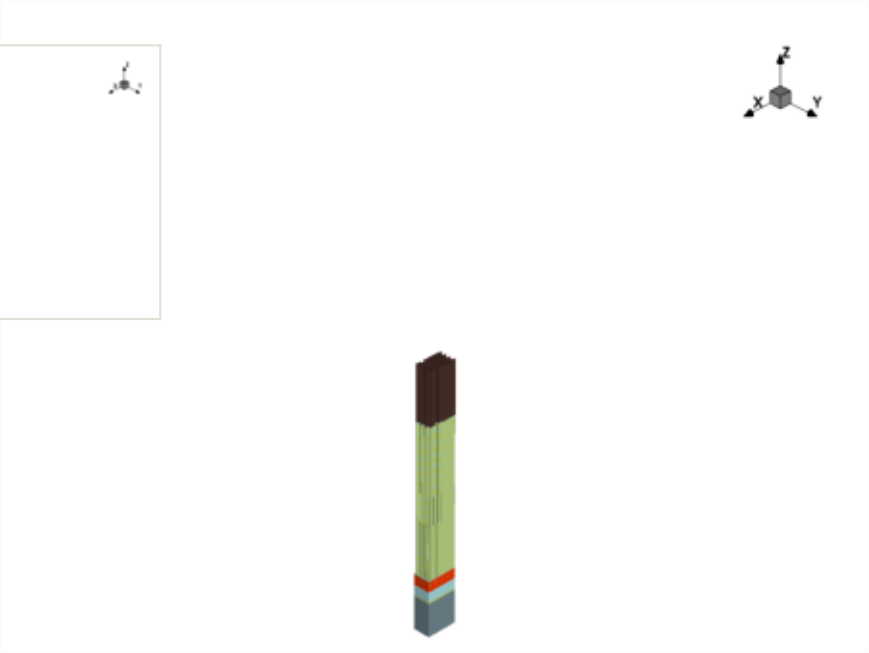

x cut at -0.570 µm

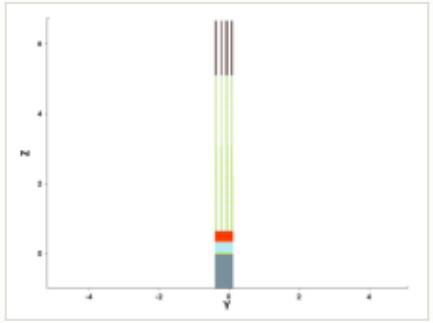

y cut at -0.150 µm

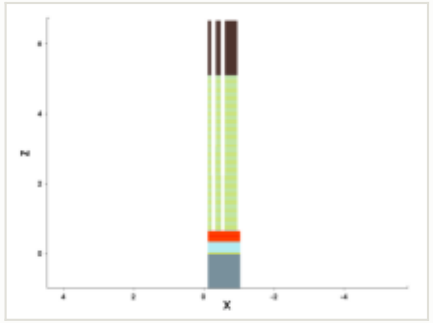

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

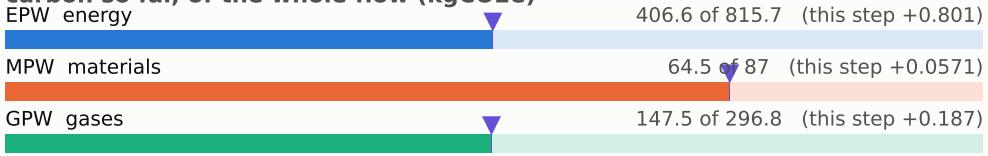

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

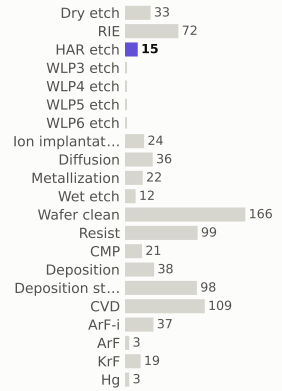

materials deposited (g)

gases emitted (g)

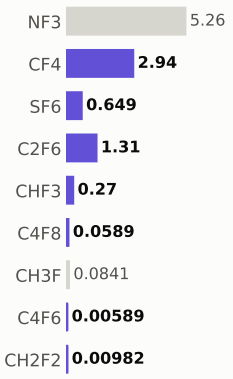

Step #16563.0612: HAR_etch

etch_noop · HAR_etch

1.04	619.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

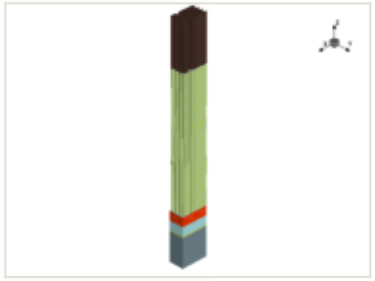

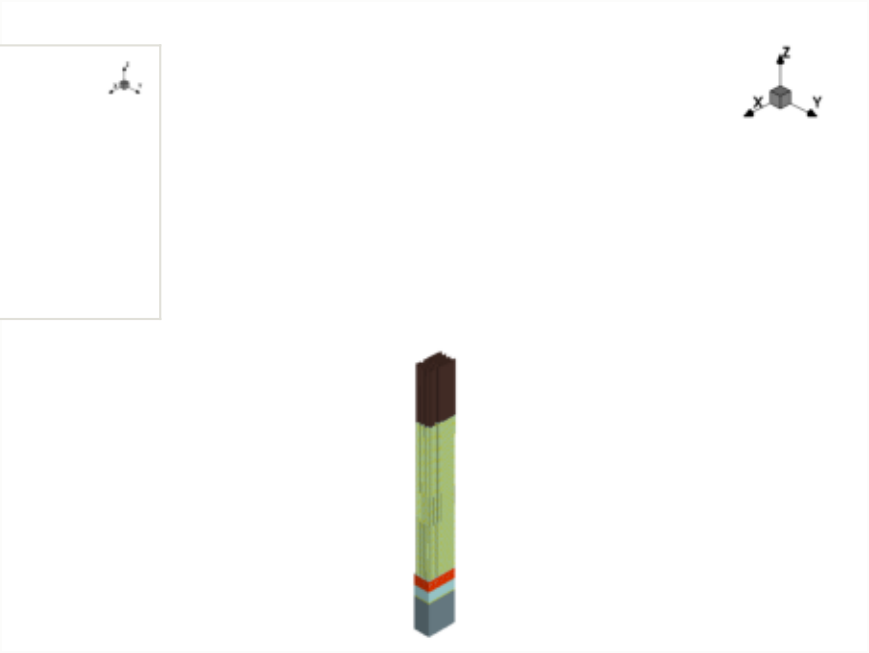

x cut at -0.570 µm

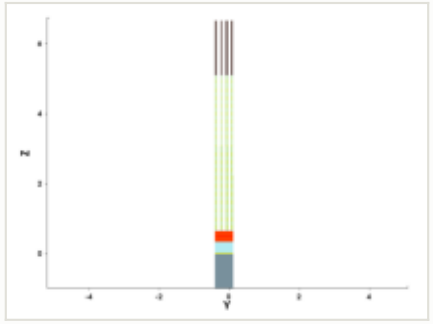

y cut at -0.150 µm

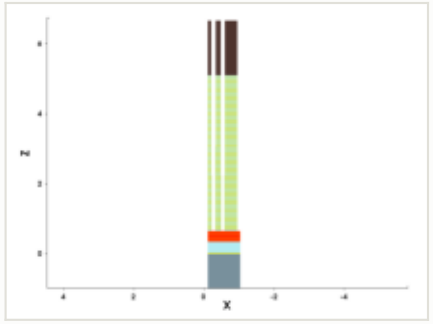

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

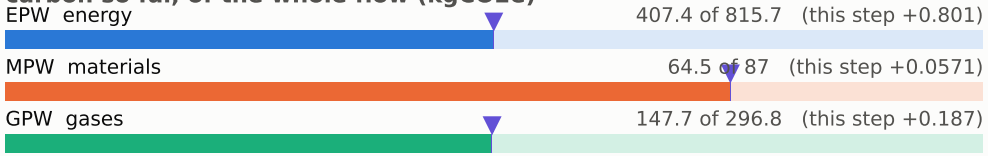

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

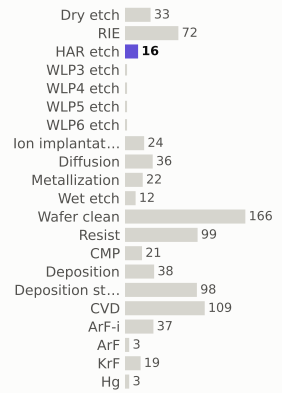

materials deposited (g)

gases emitted (g)

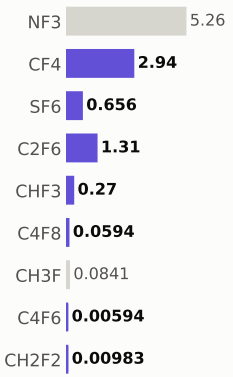

Step #16563.1633: HAR_etch

etch_noop · HAR_etch

1.04	620.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

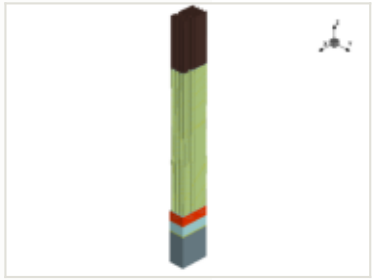

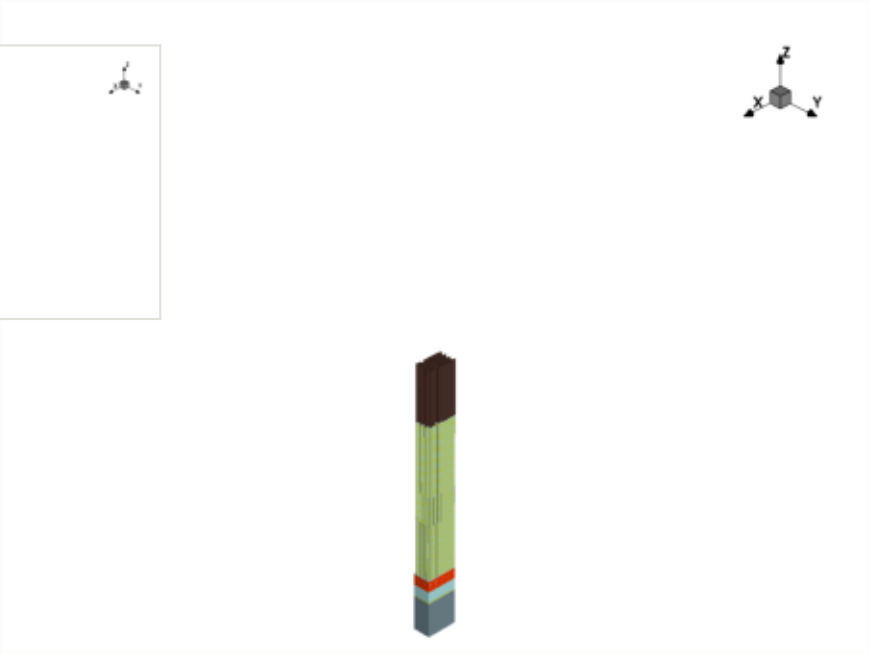

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

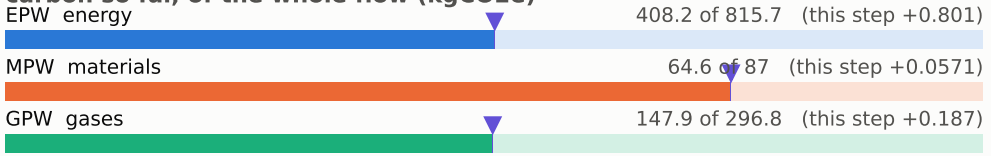

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

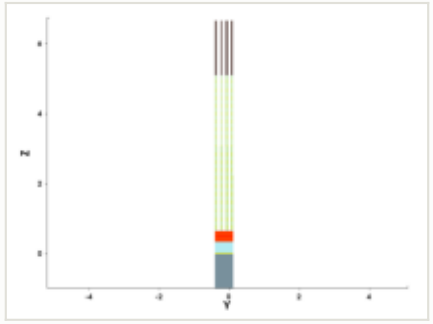

y cut at -0.150 µm

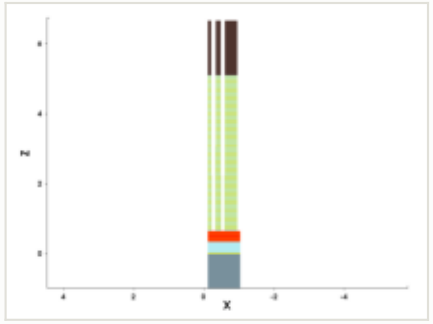

mask for this step

no mask for this step

steps by process area

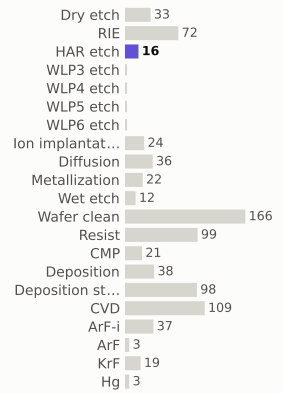

materials deposited (g)

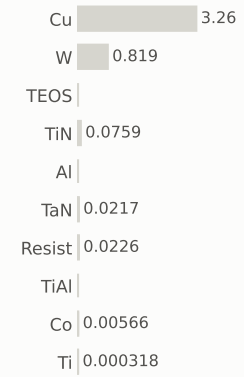

gases emitted (g)

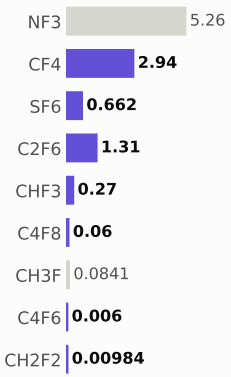

Step #16563.2653: HAR_etch

etch_noop · HAR_etch

1.04	621.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

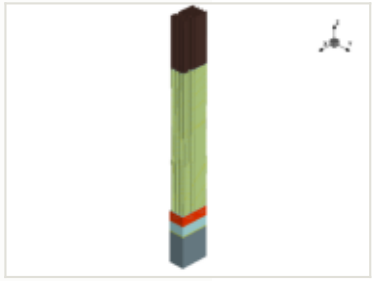

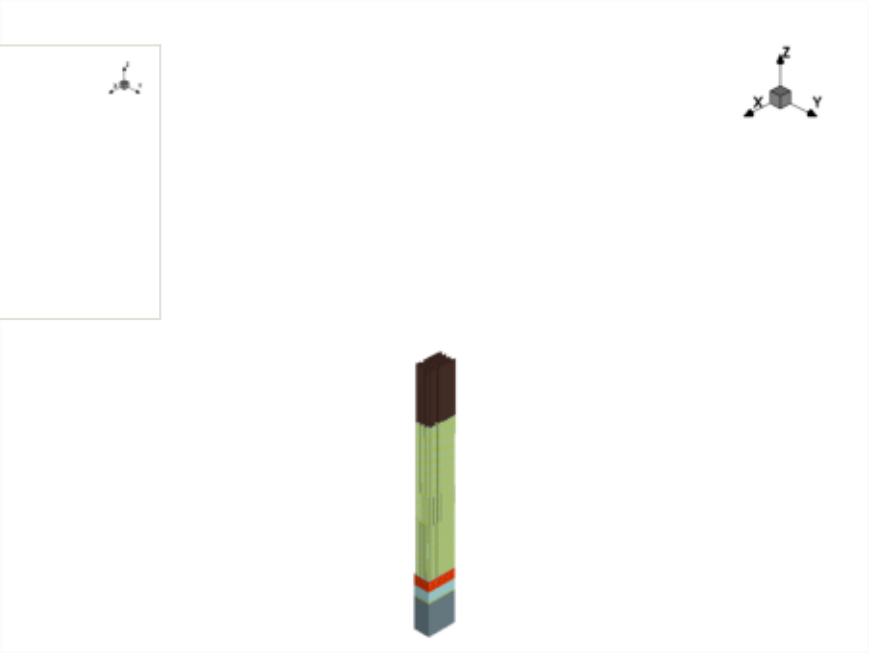

x cut at -0.570 µm

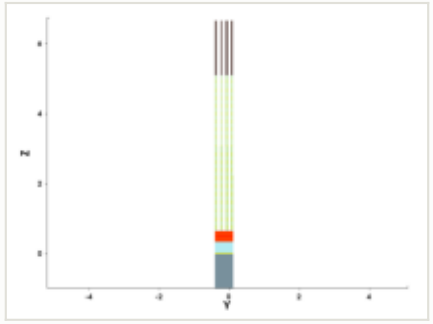

y cut at -0.150 µm

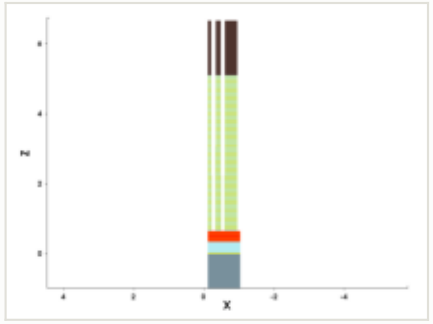

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

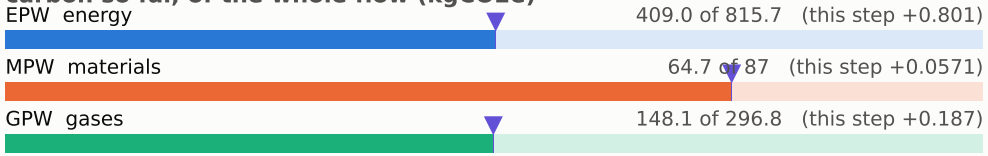

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

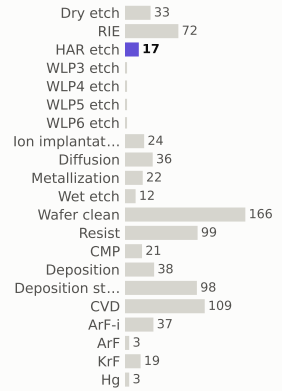

materials deposited (g)

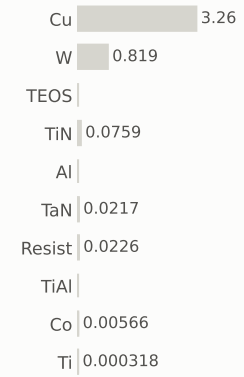

gases emitted (g)

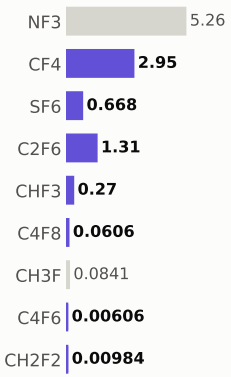

Step #16563.367299999998: HAR_etch

etch_noop · HAR_etch

1.04	622.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

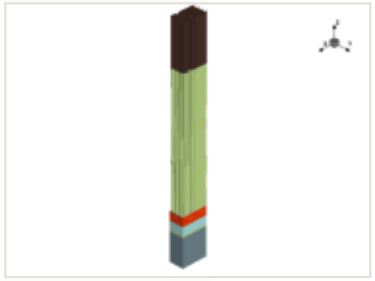

x cut at -0.570 µm

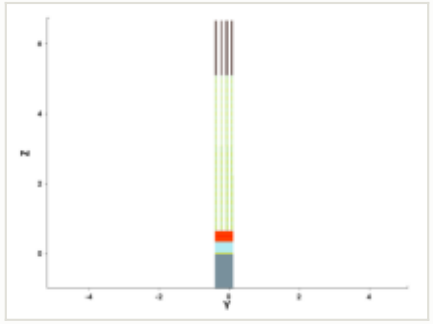

y cut at -0.150 µm

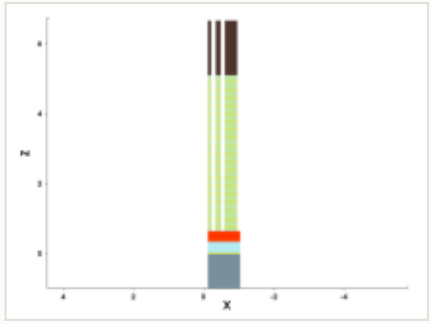

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

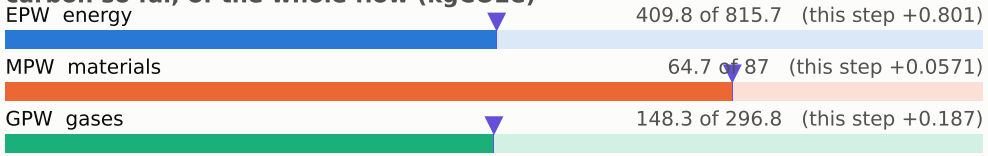

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

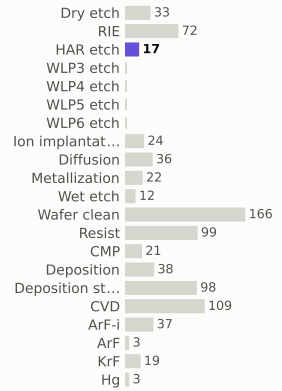

materials deposited (g)

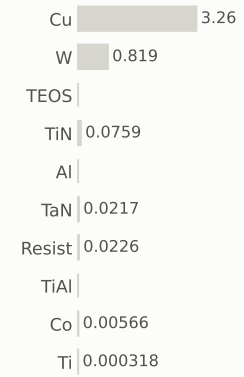

gases emitted (g)

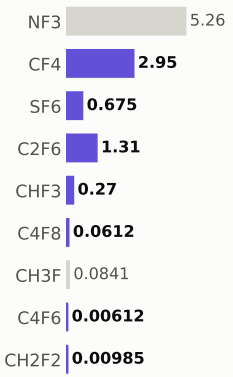

Step #16563.4694: HAR_etch

etch_noop · HAR_etch

1.04	623.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

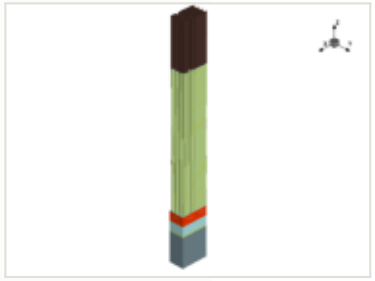

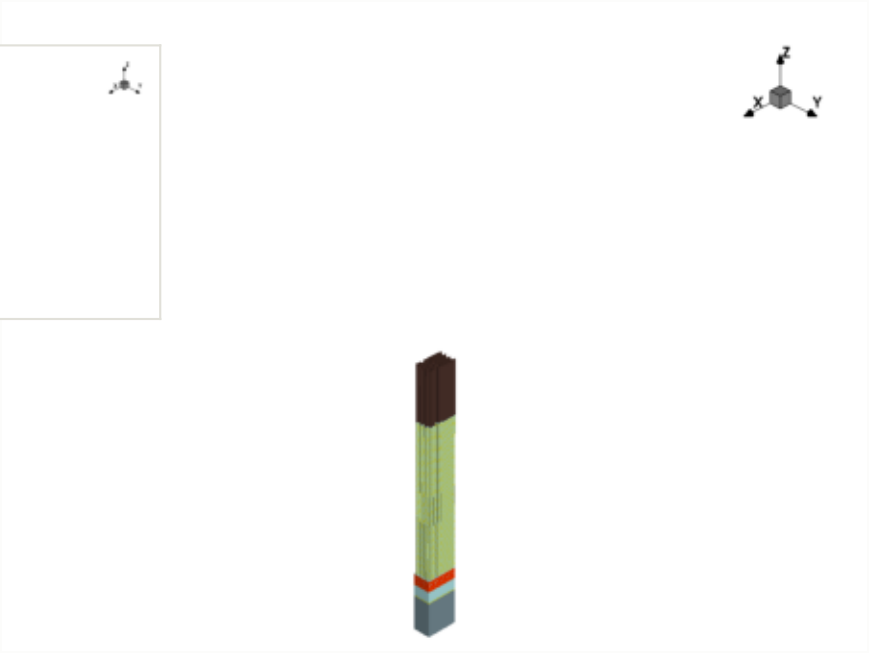

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

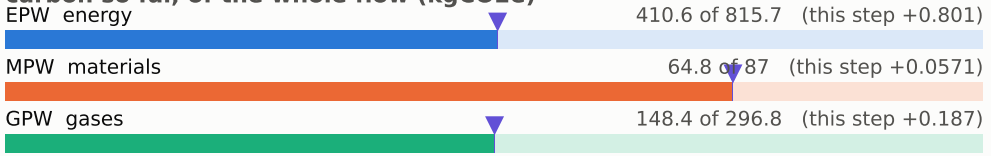

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

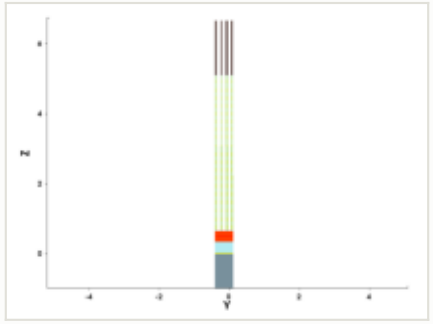

y cut at -0.150 µm

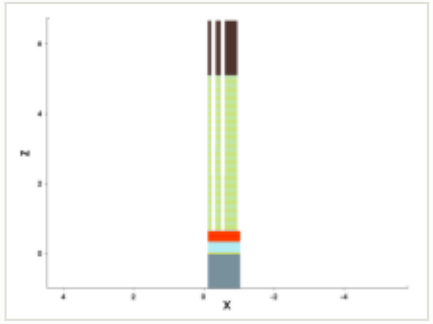

mask for this step

no mask for this step

steps by process area

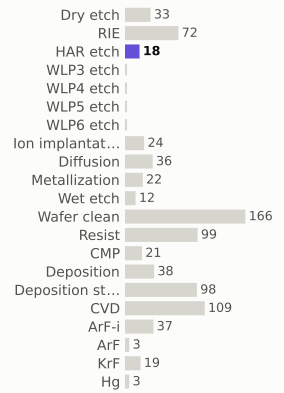

materials deposited (g)

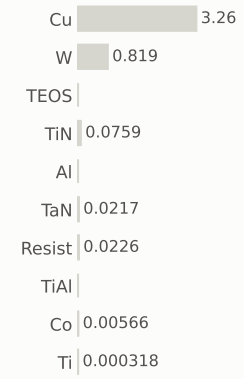

gases emitted (g)

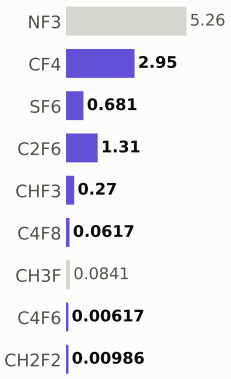

Step #16563.5714: HAR_etch

etch_noop · HAR_etch

1.04	624.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

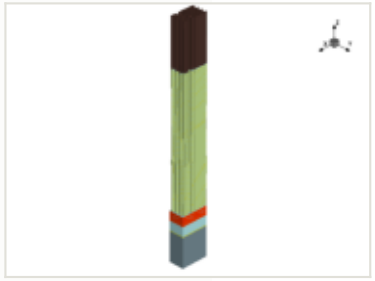

x cut at -0.570 µm

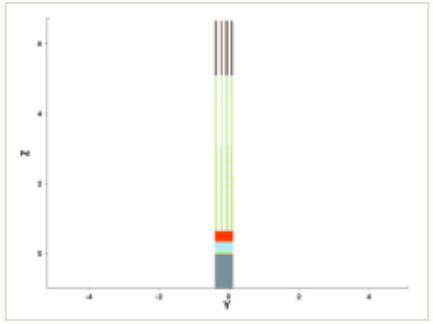

y cut at -0.150 µm

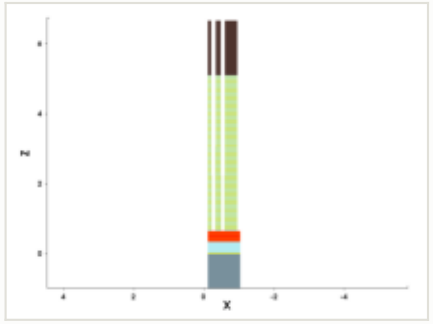

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

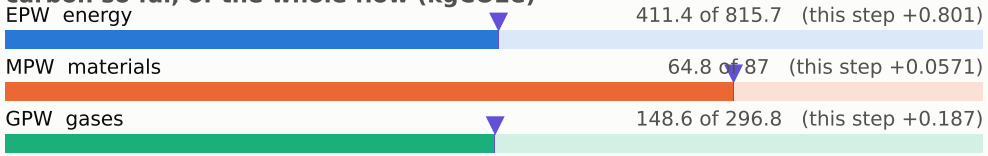

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

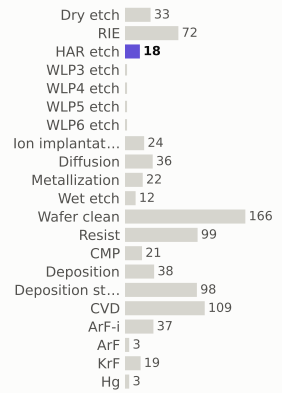

materials deposited (g)

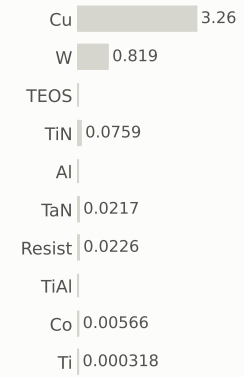

gases emitted (g)

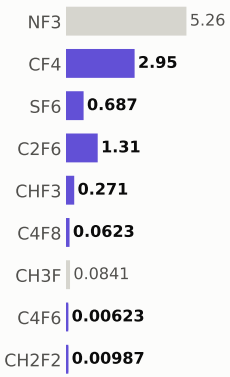

Step #16563.6735: HAR_etch

etch_noop · HAR_etch

1.04	625.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

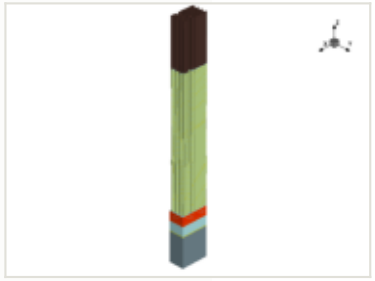

x cut at -0.570 µm

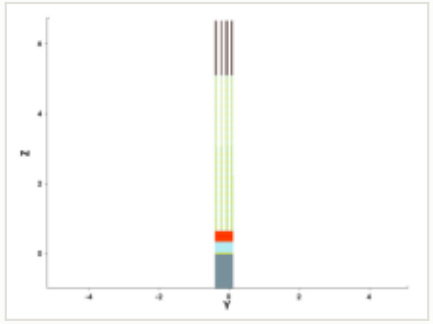

y cut at -0.150 µm

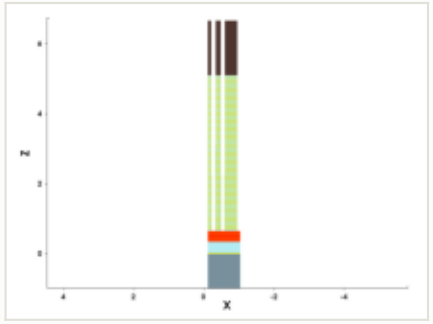

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

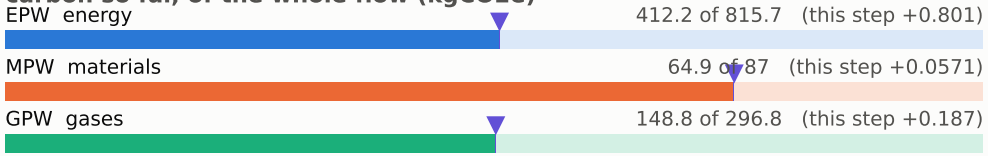

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

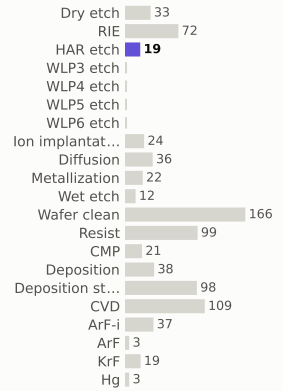

materials deposited (g)

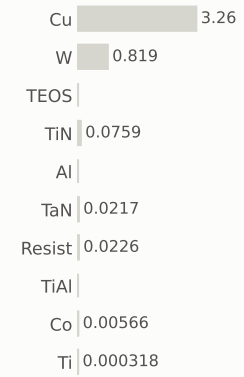

gases emitted (g)

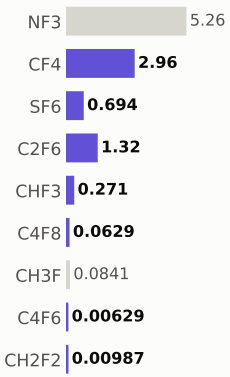

Step #16563.7755: HAR_etch

etch_noop · HAR_etch

1.04	626.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

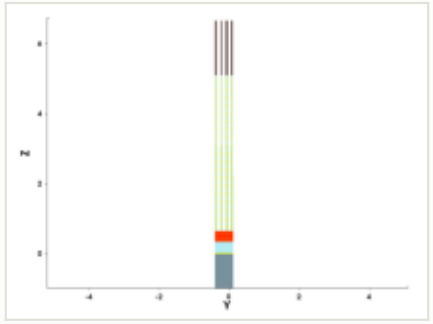

y cut at -0.150 µm

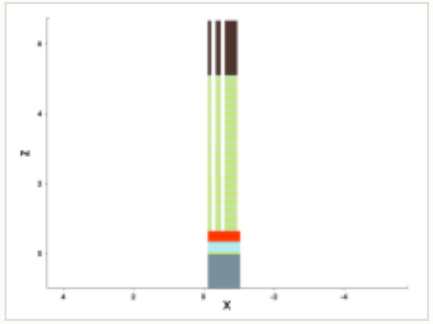

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

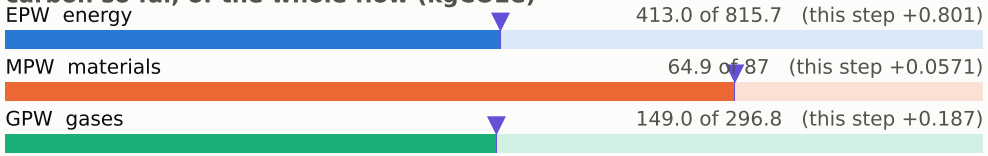

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

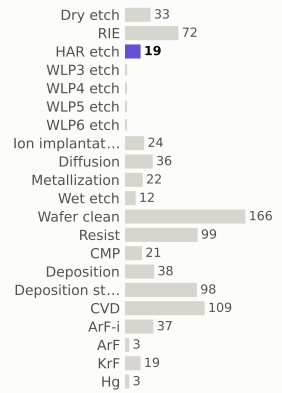

materials deposited (g)

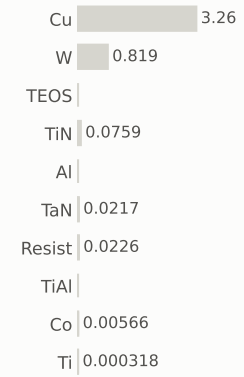

gases emitted (g)

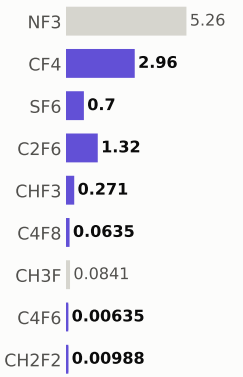

Step #16563.8776: HAR_etch

etch_noop · HAR_etch

1.04	628.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

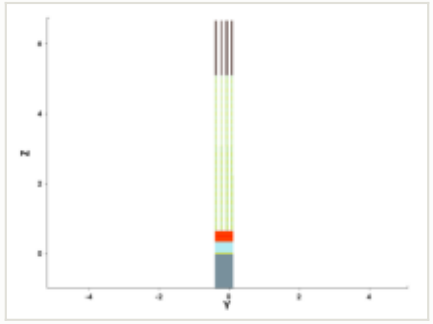

y cut at -0.150 µm

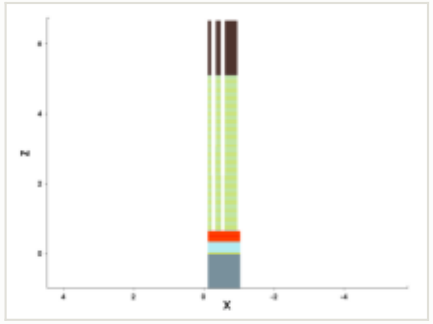

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

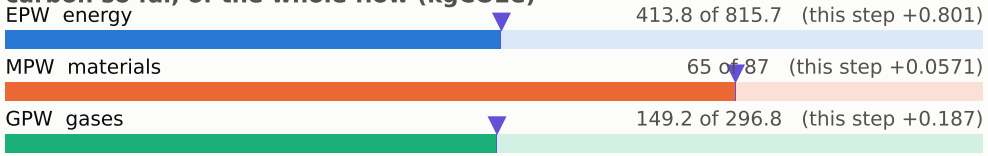

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

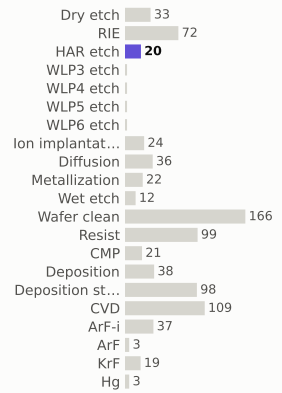

materials deposited (g)

gases emitted (g)

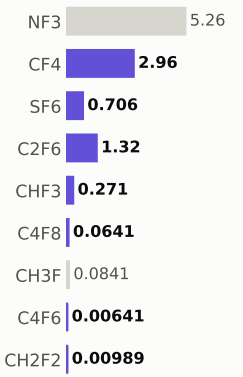

Step #16563.9796: HAR_etch

etch_noop · HAR_etch

1.04	629.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

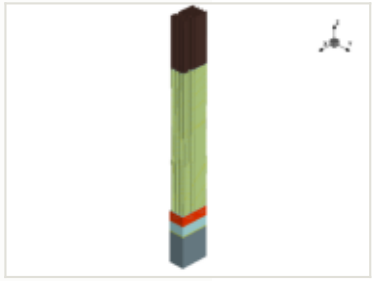

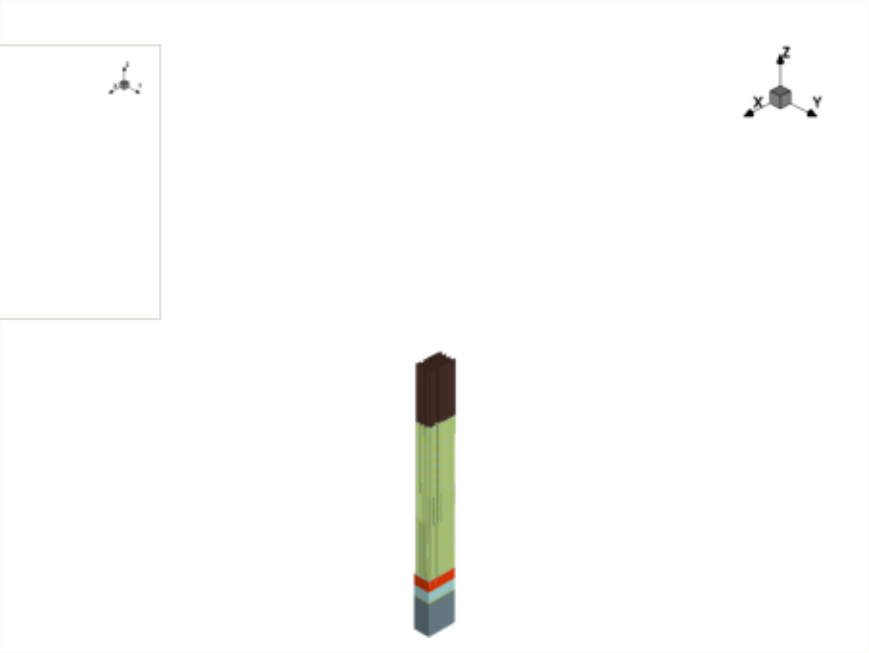

x cut at -0.570 µm

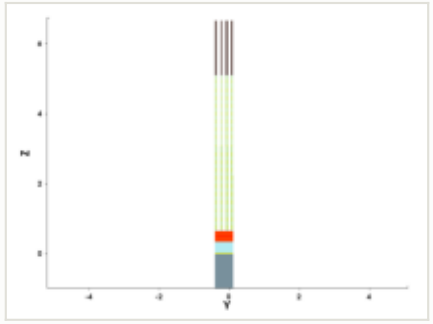

y cut at -0.150 µm

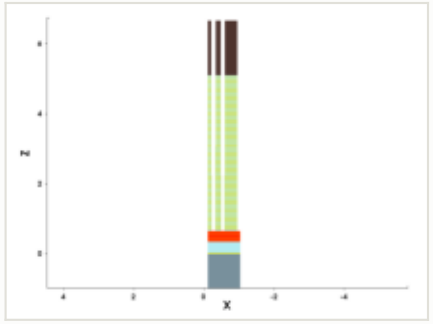

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

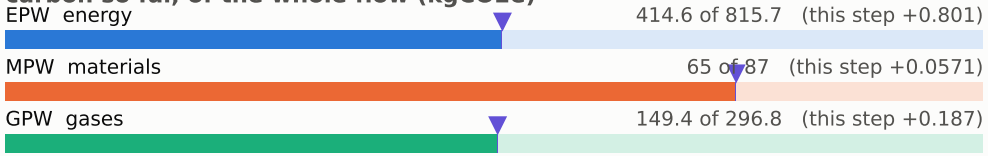

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

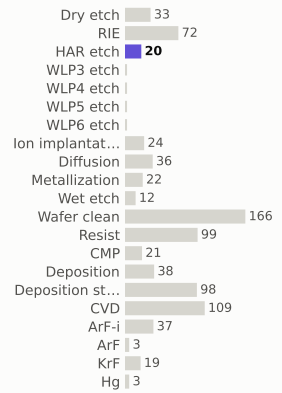

materials deposited (g)

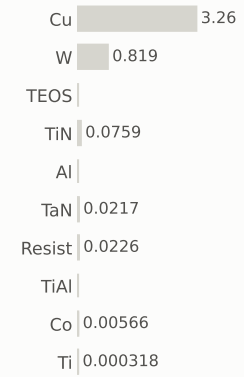

gases emitted (g)

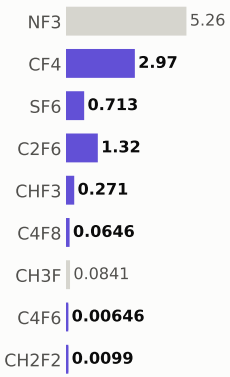

Step #16564.0816: HAR_etch

etch_noop · HAR_etch

1.04	630.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

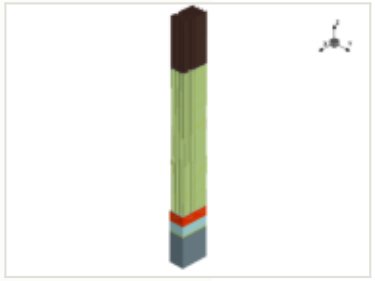

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

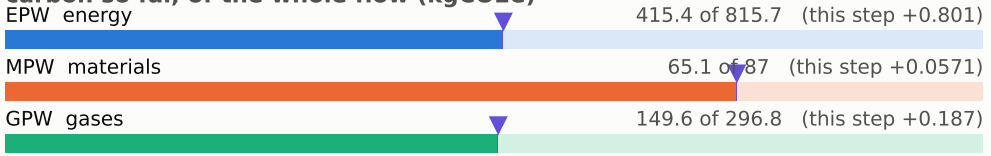

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

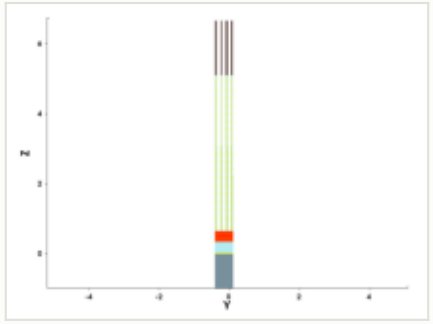

y cut at -0.150 µm

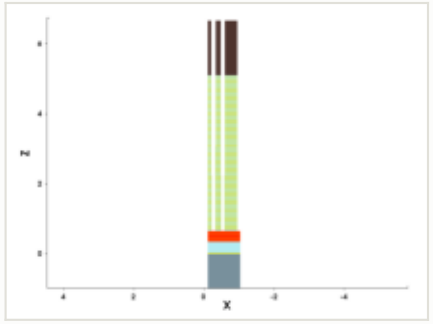

mask for this step

no mask for this step

steps by process area

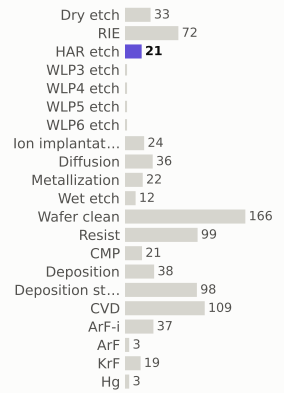

materials deposited (g)

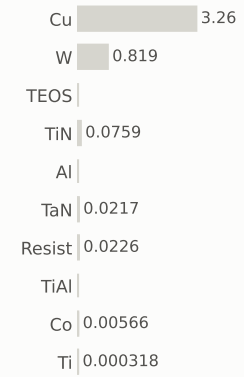

gases emitted (g)

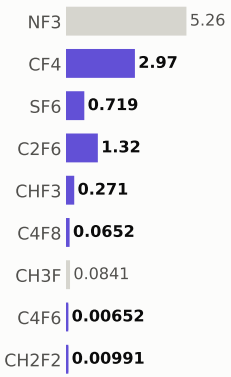

Step #16564.1837: HAR_etch

etch_noop · HAR_etch

1.04	631.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

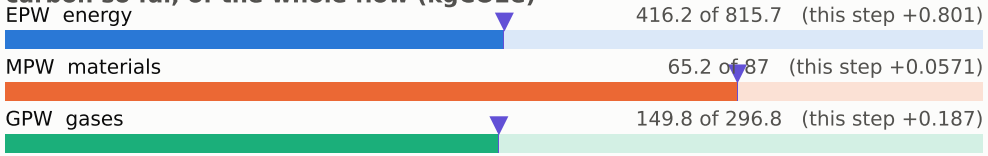

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

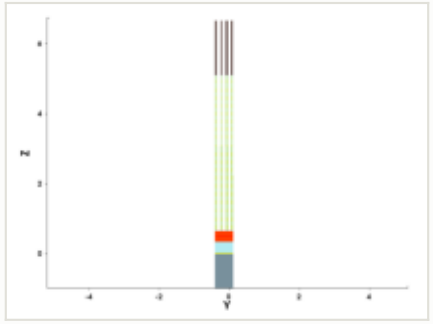

y cut at -0.150 µm

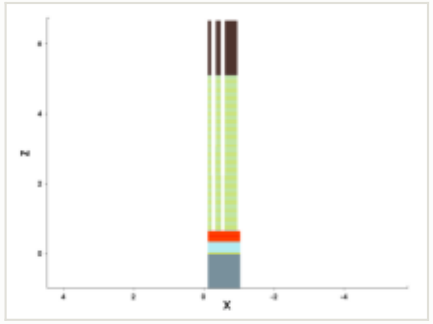

mask for this step

no mask for this step

steps by process area

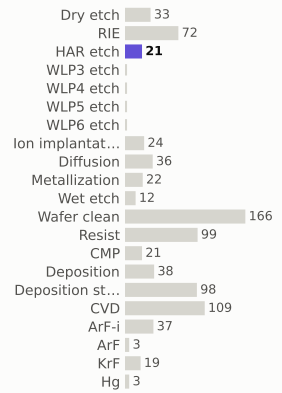

materials deposited (g)

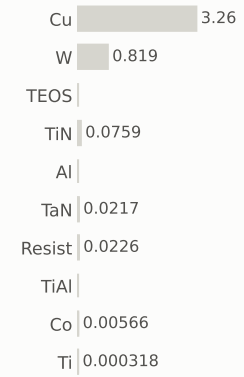

gases emitted (g)

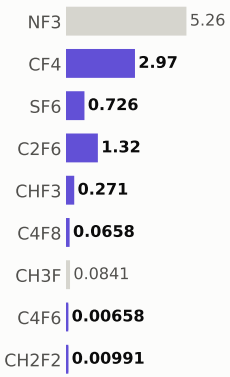

Step #16564.2857: HAR_etch

etch_noop · HAR_etch

1.04	632.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

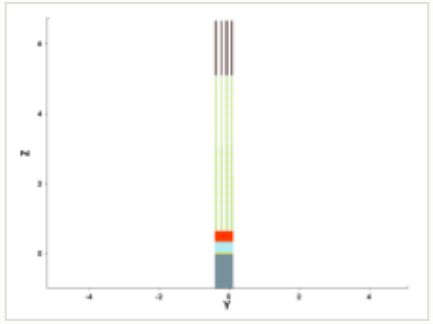

y cut at -0.150 µm

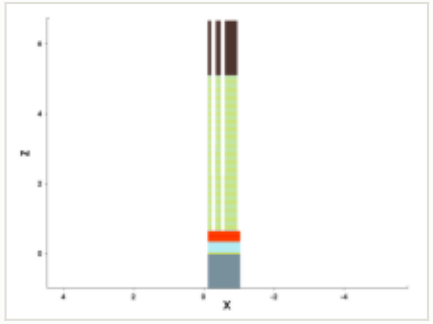

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

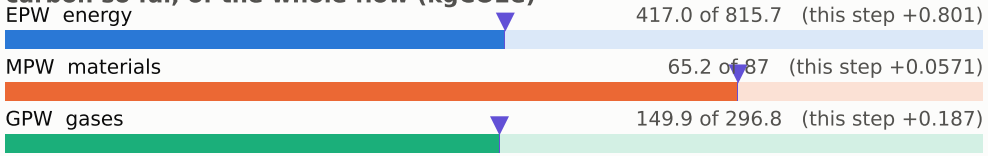

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

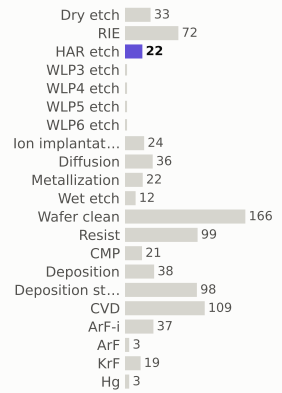

materials deposited (g)

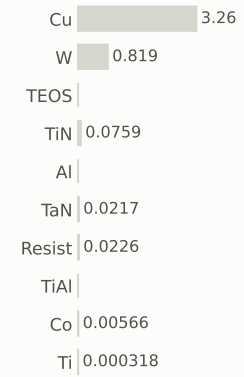

gases emitted (g)

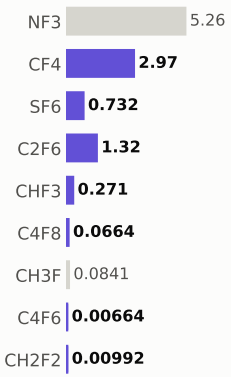

Step #16564.3878: HAR_etch

etch_noop · HAR_etch

1.04	633.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

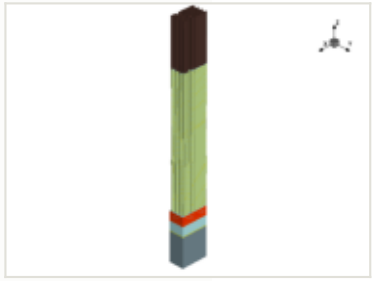

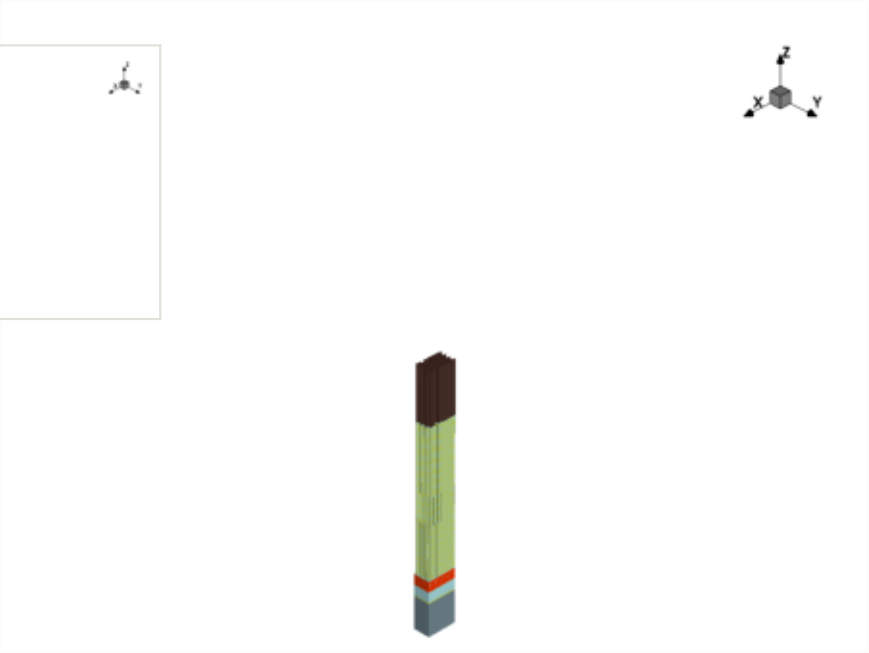

x cut at -0.570 µm

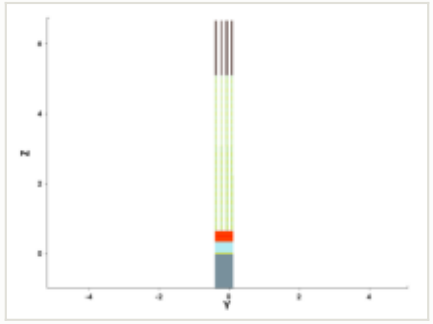

y cut at -0.150 µm

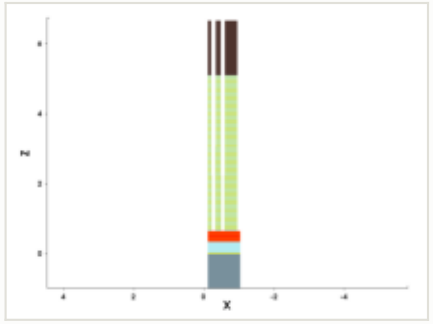

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

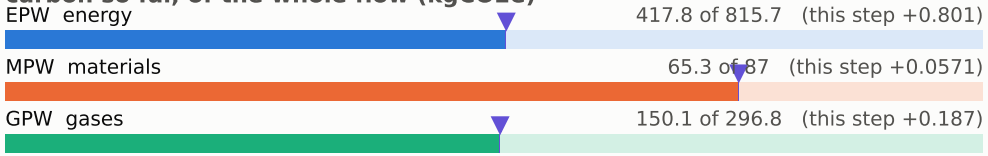

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

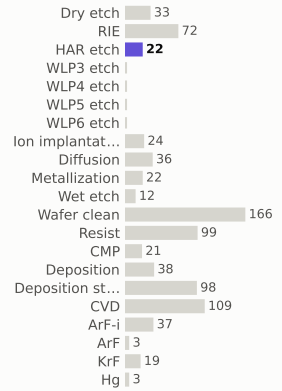

materials deposited (g)

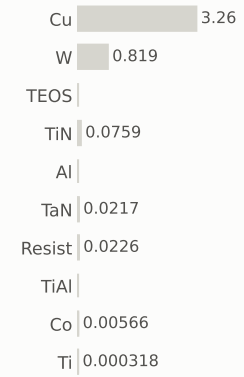

gases emitted (g)

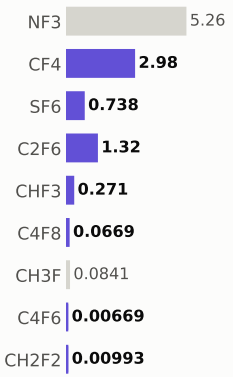

Step #16564.4898: HAR_etch

etch_noop · HAR_etch

1.04	634.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

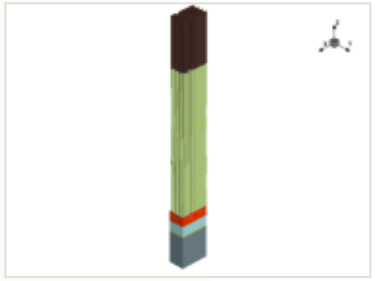

x cut at -0.570 µm

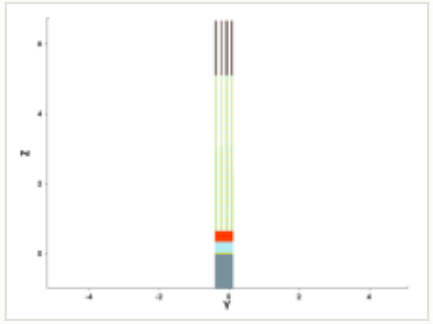

y cut at -0.150 µm

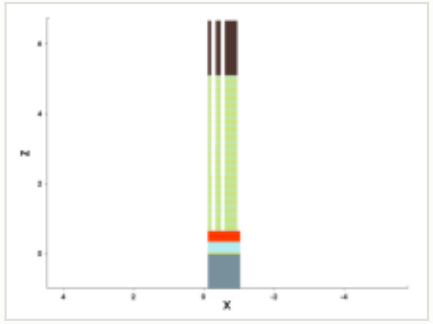

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

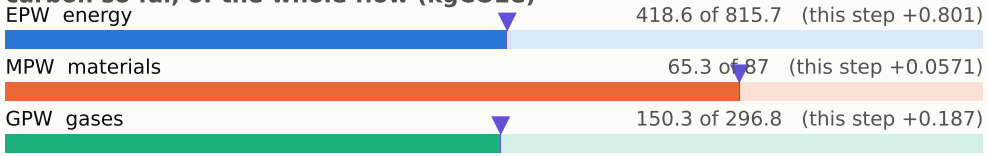

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

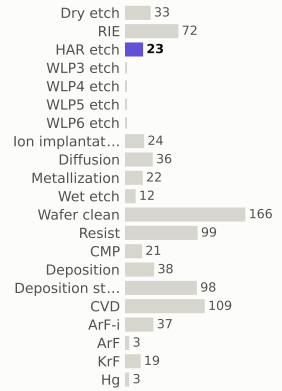

materials deposited (g)

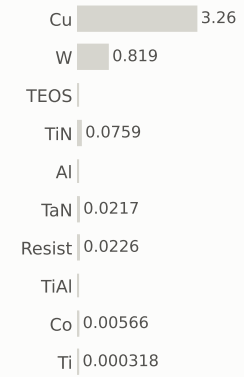

gases emitted (g)

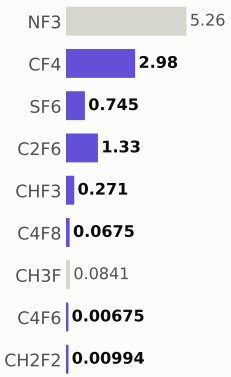

Step #16564.591800000002: HAR_etch

etch_noop · HAR_etch

1.04	635.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

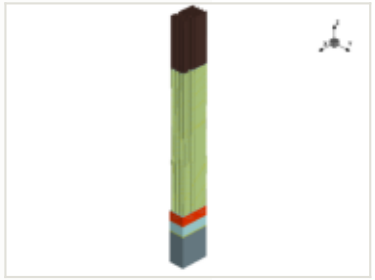

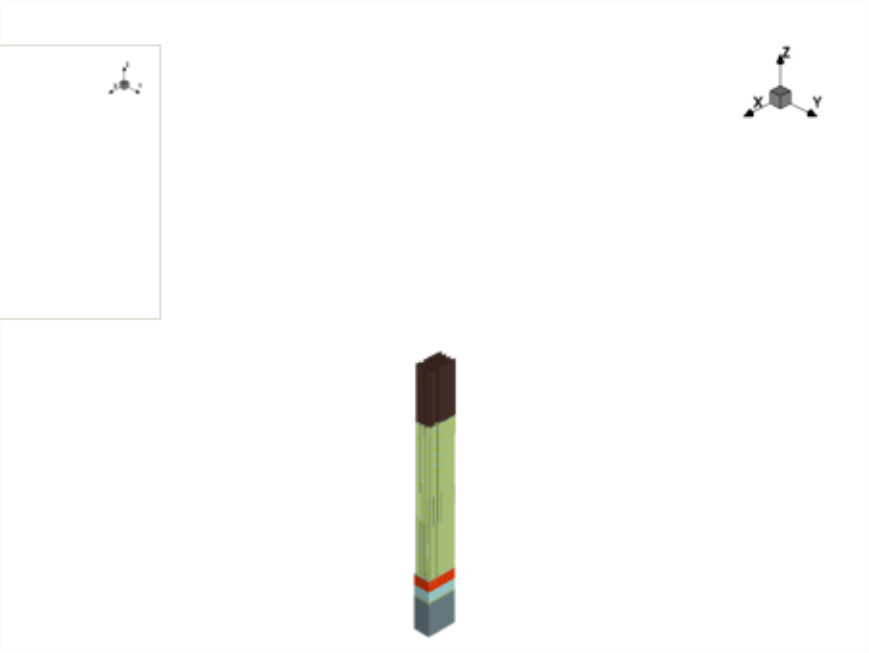

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

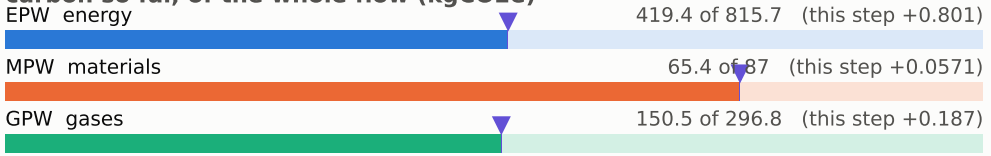

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

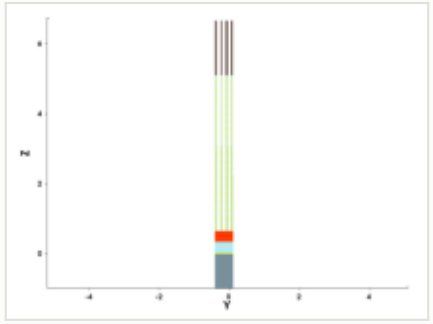

y cut at -0.150 µm

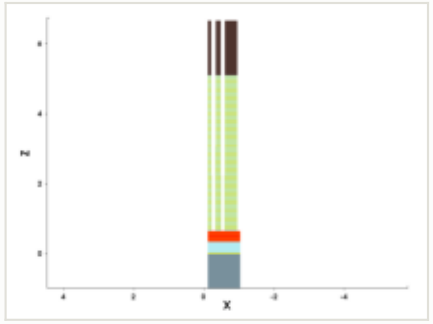

mask for this step

no mask for this step

steps by process area

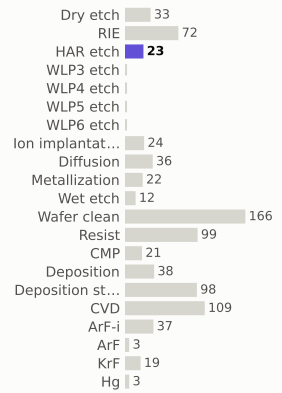

materials deposited (g)

gases emitted (g)

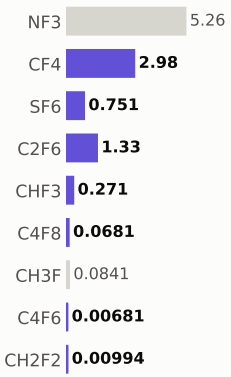

Step #16564.6939: HAR_etch

etch_noop · HAR_etch

1.04	636.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

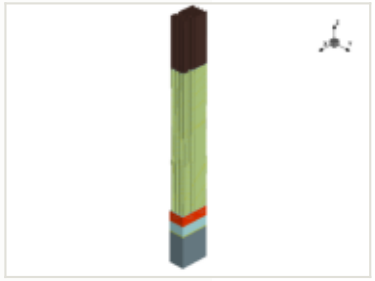

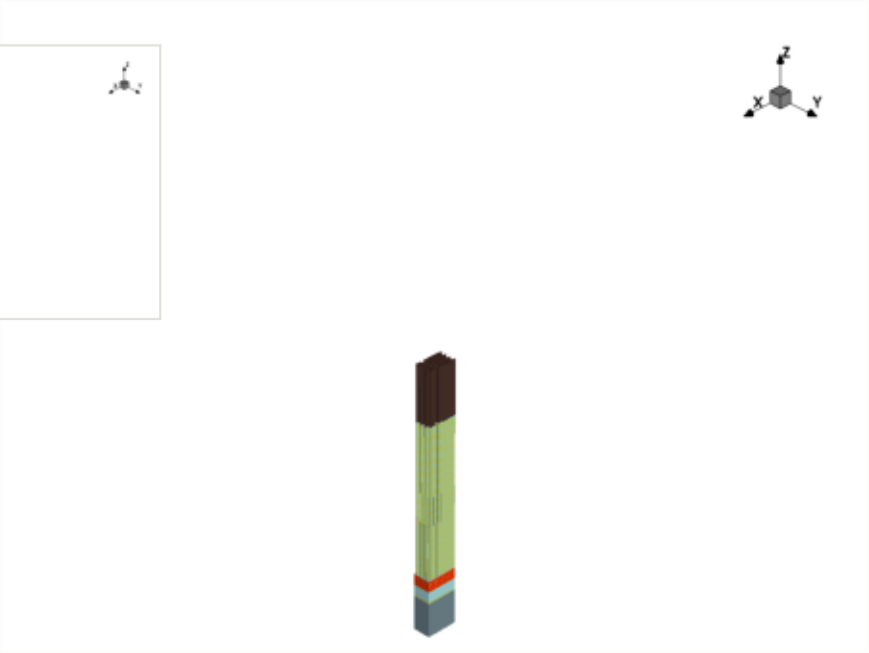

x cut at -0.570 µm

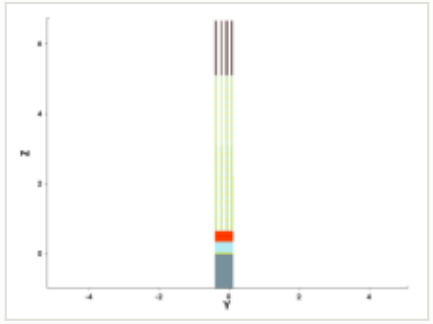

y cut at -0.150 µm

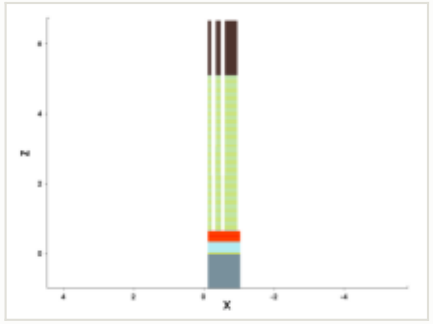

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

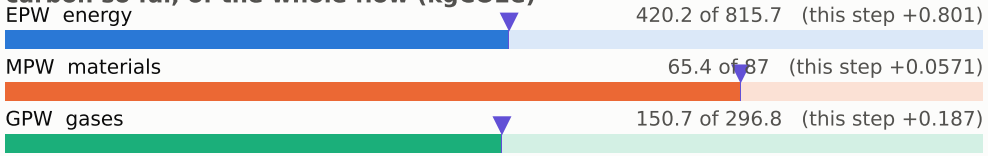

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

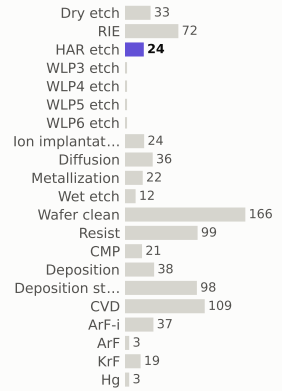

materials deposited (g)

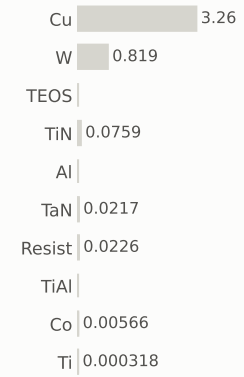

gases emitted (g)

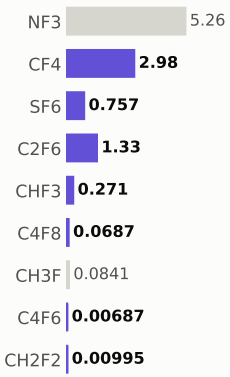

Step #16564.7959: HAR_etch

etch_noop · HAR_etch

1.04	637.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

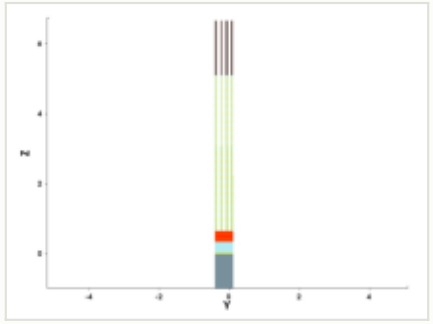

y cut at -0.150 µm

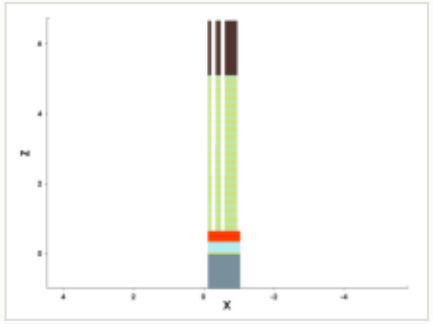

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

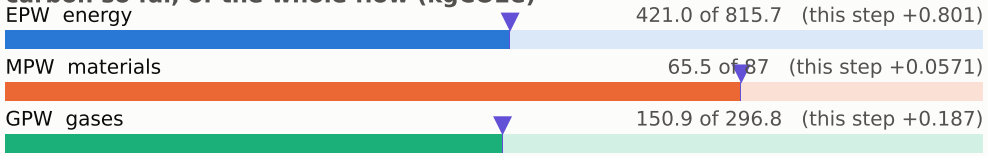

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

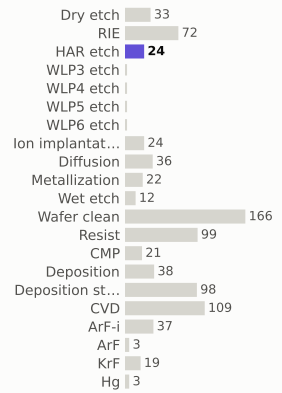

materials deposited (g)

gases emitted (g)

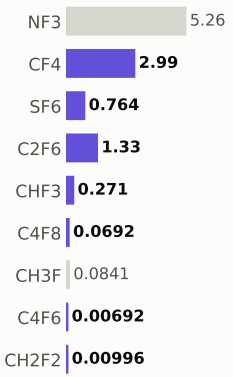

Step #16564.898: HAR_etch

etch_noop · HAR_etch

1.04	638.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

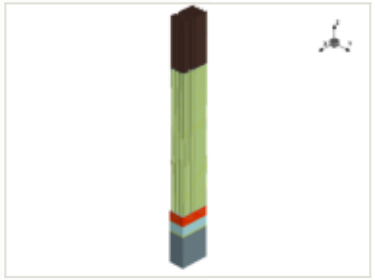

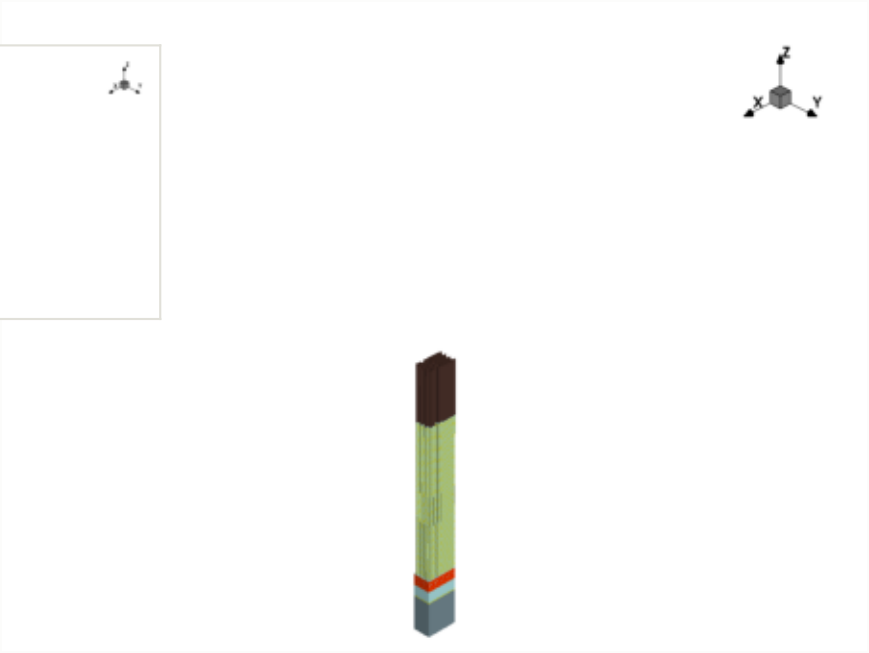

x cut at -0.570 µm

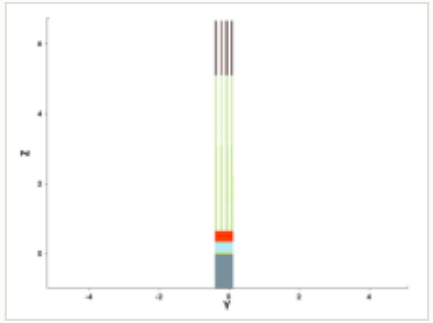

y cut at -0.150 µm

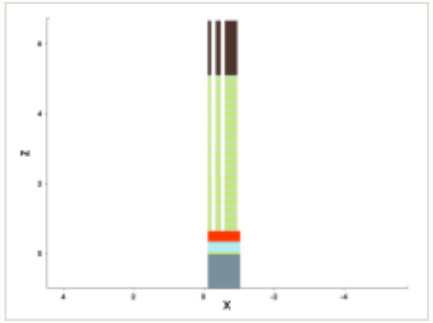

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

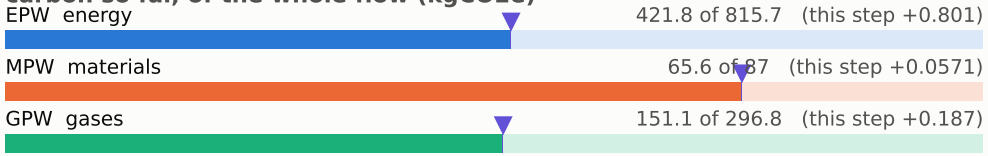

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

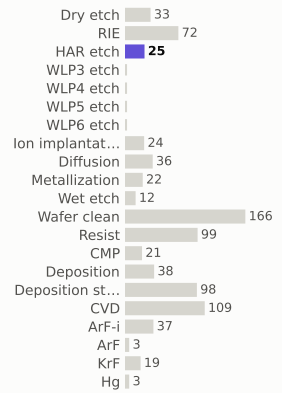

materials deposited (g)

gases emitted (g)

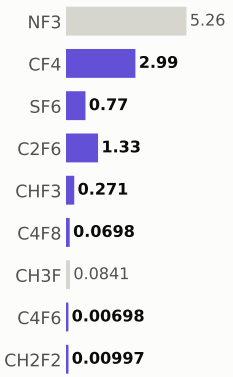

Step #16565: HAR_etch

etch_noop · HAR_etch

1.04	639.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

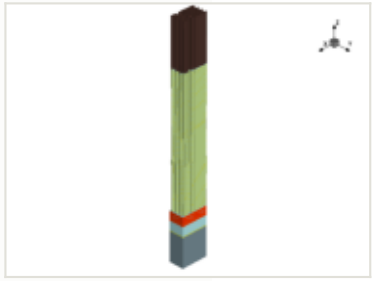

x cut at -0.570 µm

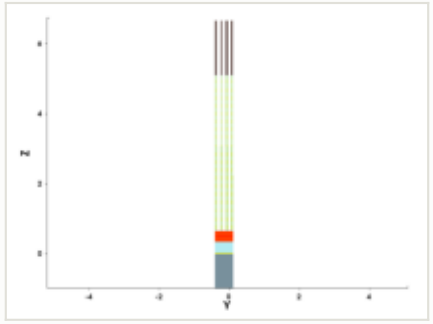

y cut at -0.150 µm

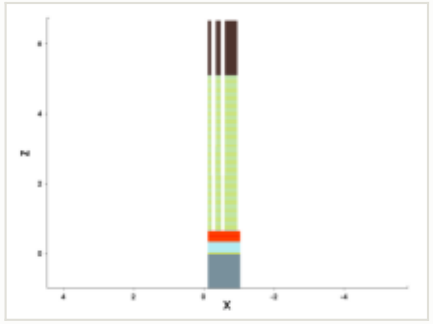

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

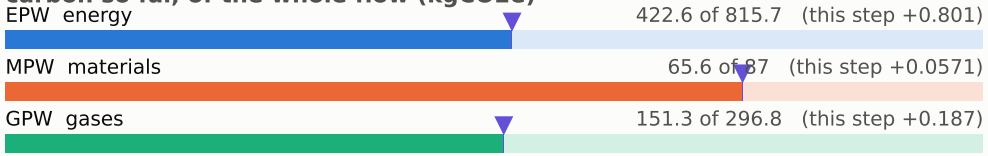

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

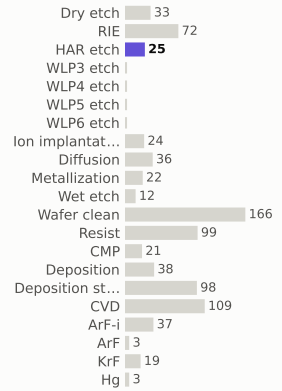

materials deposited (g)

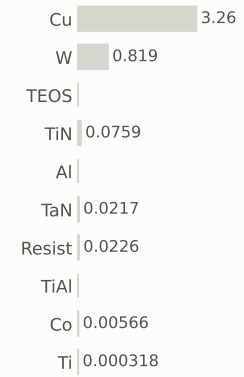

gases emitted (g)

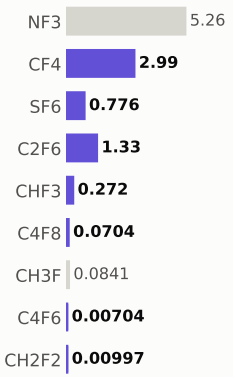

Step #16565.102: HAR_etch

etch_noop · HAR_etch

1.04	640.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

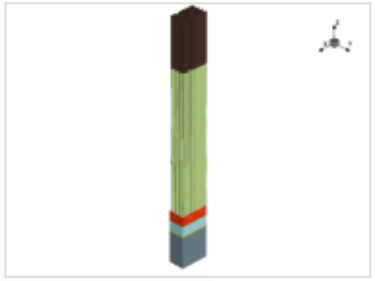

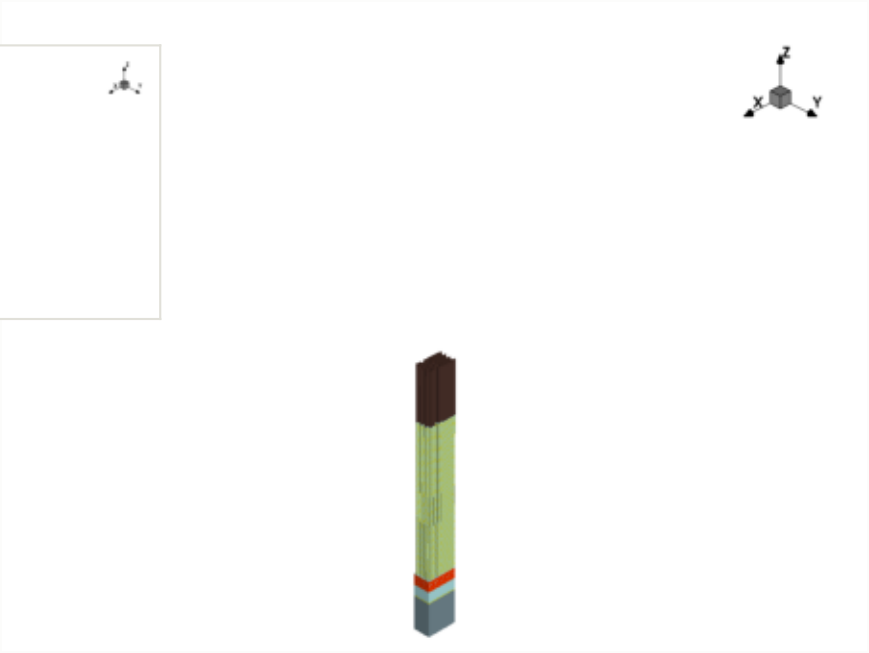

x cut at -0.570 µm

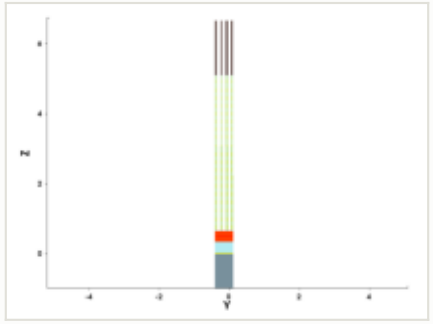

y cut at -0.150 µm

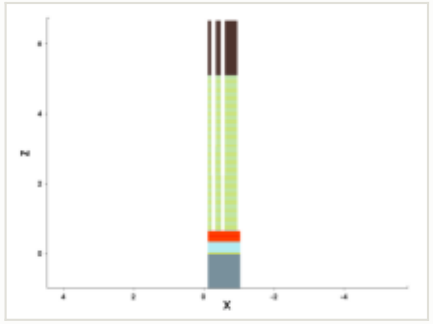

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

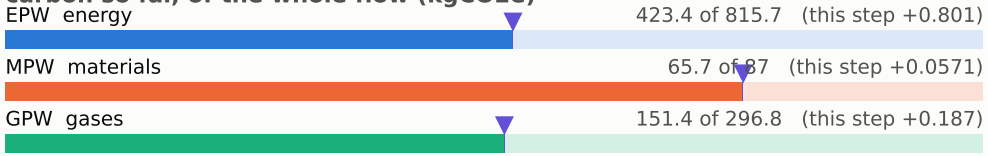

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

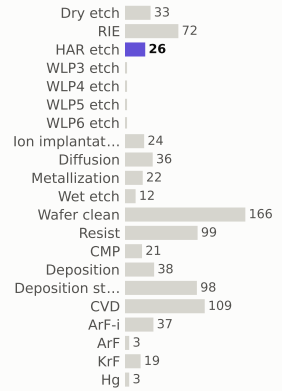

materials deposited (g)

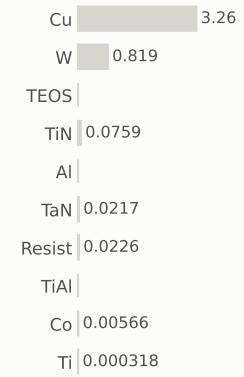

gases emitted (g)

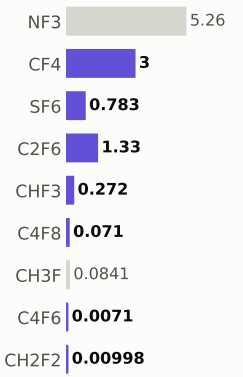

Step #16565.2041: HAR_etch

etch_noop · HAR_etch

1.04	641.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

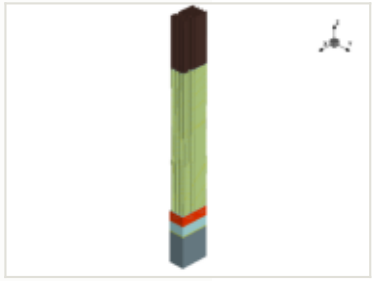

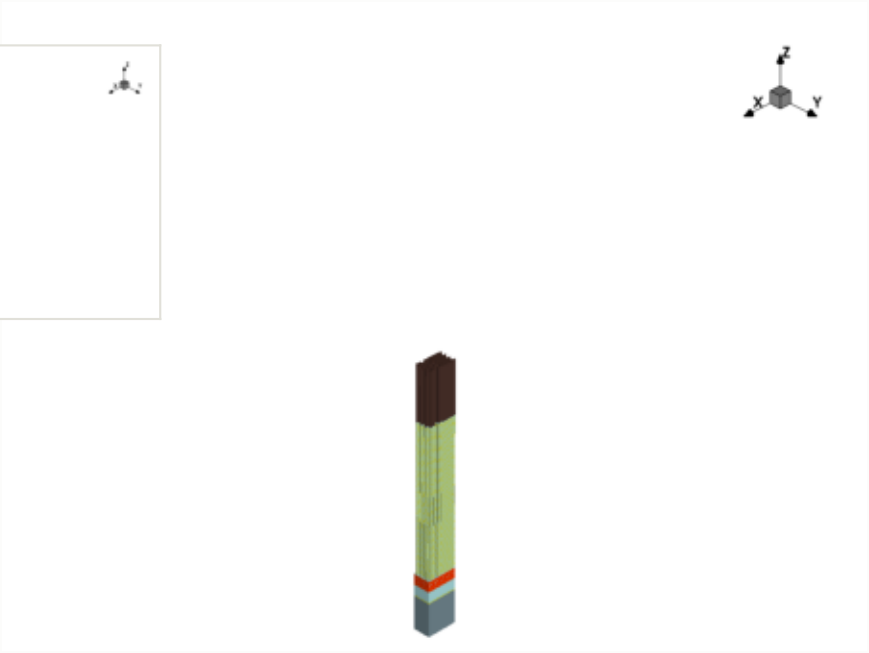

x cut at -0.570 µm

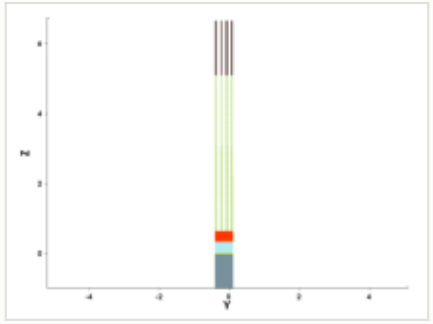

y cut at -0.150 µm

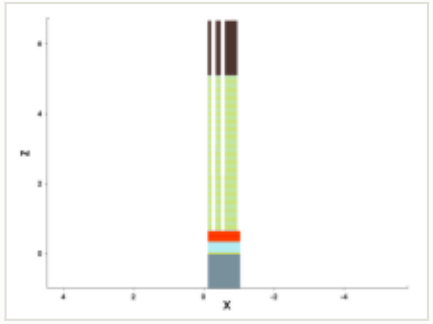

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

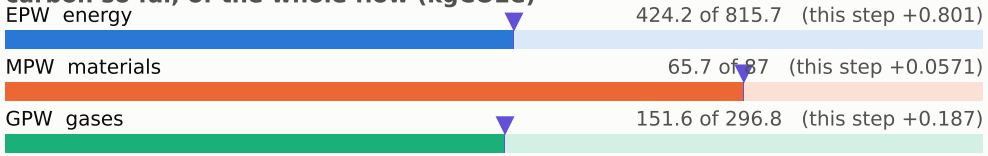

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

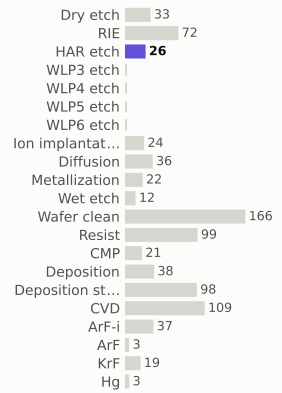

materials deposited (g)

gases emitted (g)

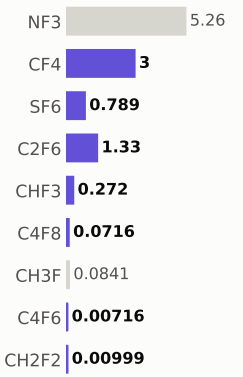

Step #16565.3061: HAR_etch

etch_noop · HAR_etch

1.04	642.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

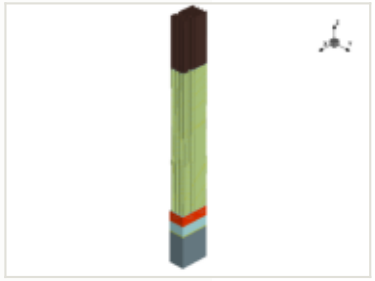

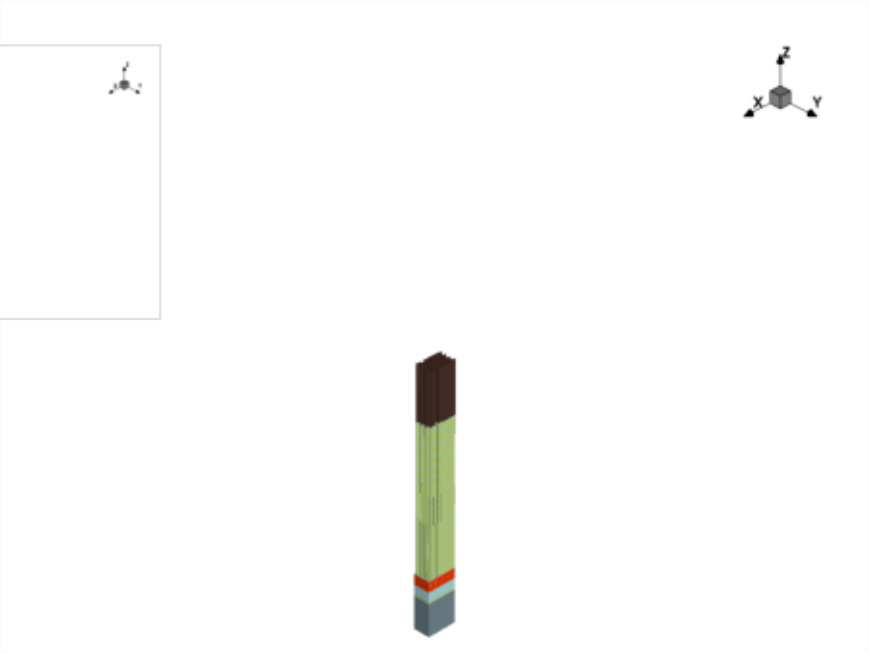

x cut at -0.570 µm

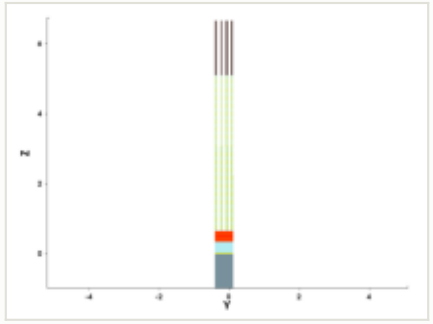

y cut at -0.150 µm

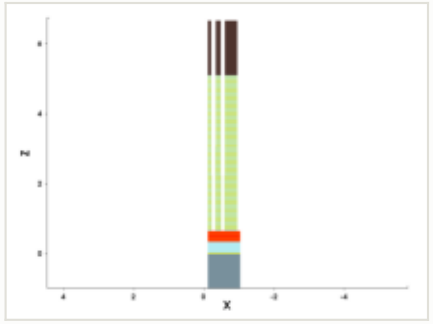

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

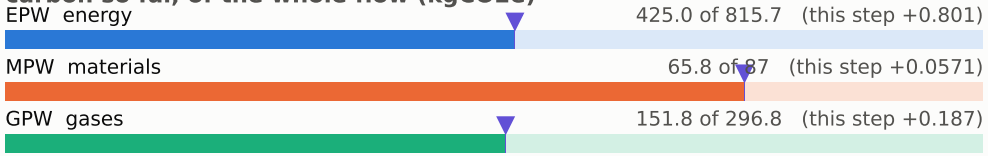

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

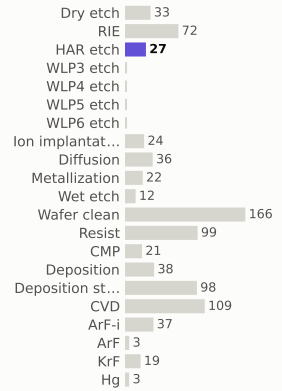

materials deposited (g)

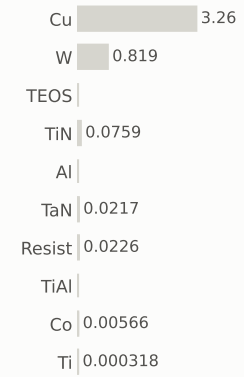

gases emitted (g)

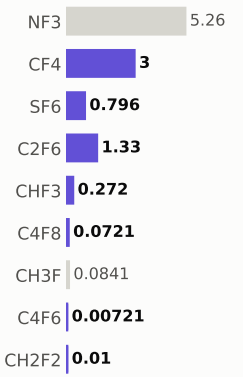

Step #16565.408199999998: HAR_etch

etch_noop · HAR_etch

1.04	643.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

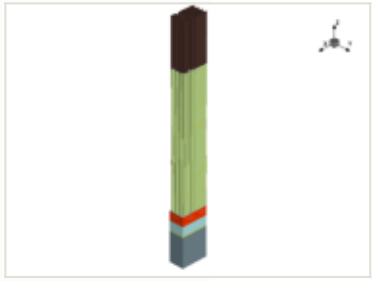

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

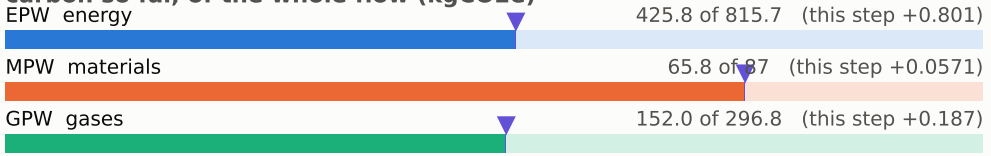

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

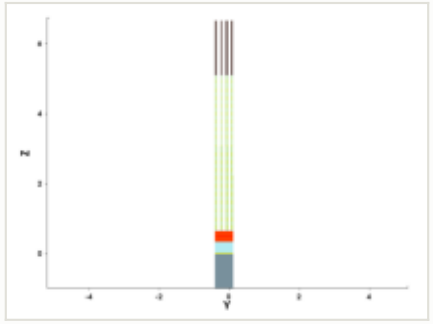

y cut at -0.150 µm

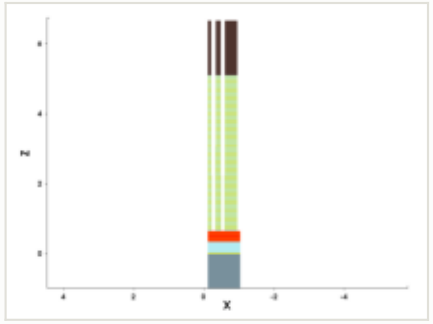

mask for this step

no mask for this step

steps by process area

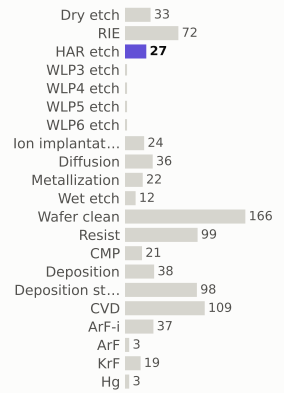

materials deposited (g)

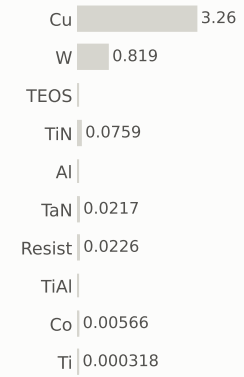

gases emitted (g)

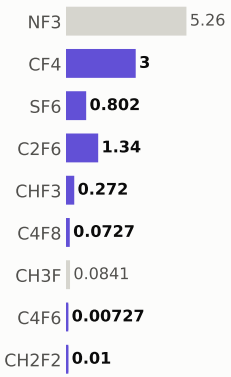

Step #16565.5102: HAR_etch

etch_noop · HAR_etch

1.04	644.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

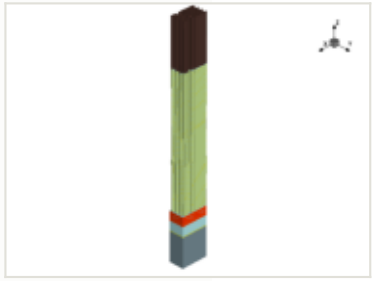

x cut at -0.570 µm

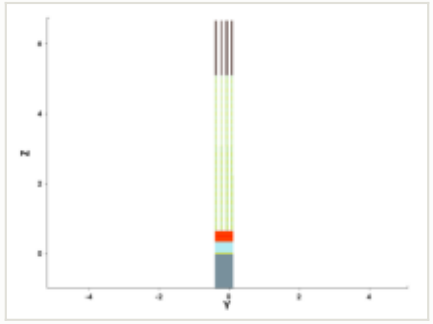

y cut at -0.150 µm

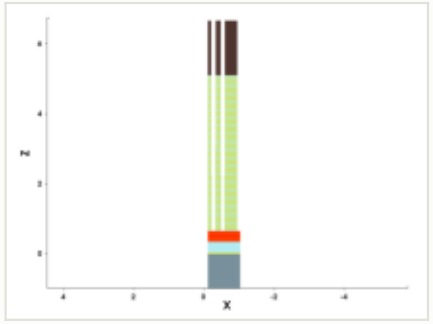

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

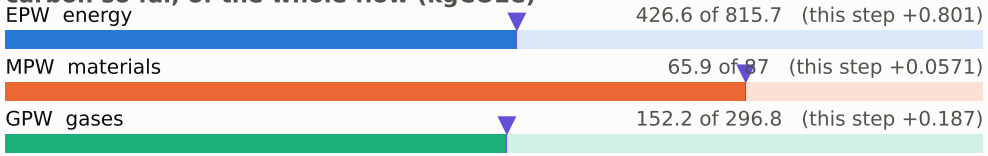

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

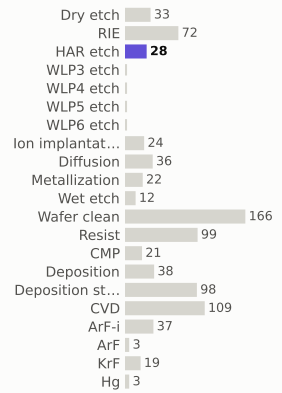

materials deposited (g)

gases emitted (g)

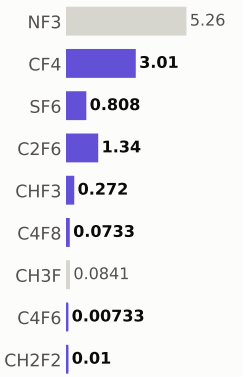

Step #16565.6122: HAR_etch

etch_noop · HAR_etch

1.04	645.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

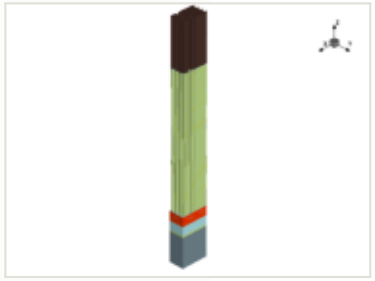

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

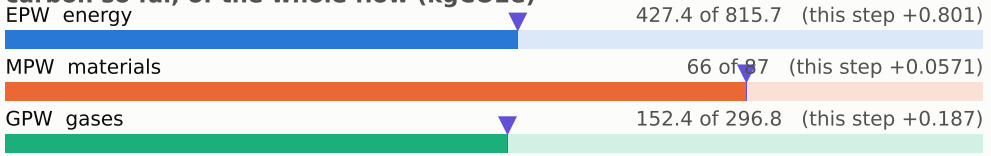

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

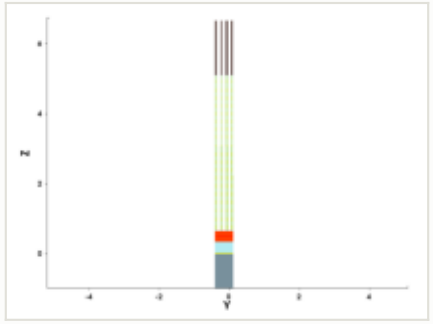

y cut at -0.150 µm

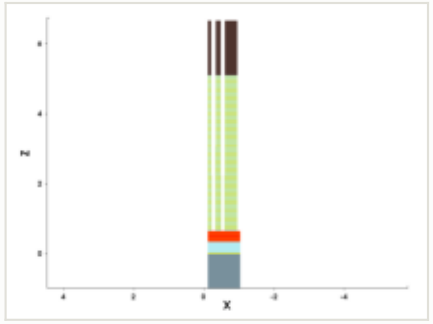

mask for this step

no mask for this step

steps by process area

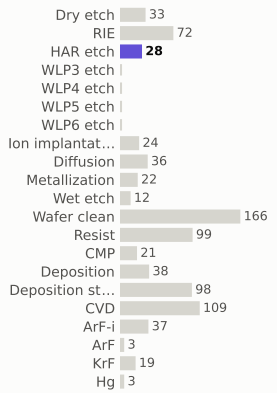

materials deposited (g)

gases emitted (g)

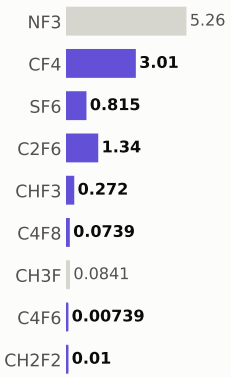

Step #16565.7143: HAR_etch

etch_noop · HAR_etch

1.04	646.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

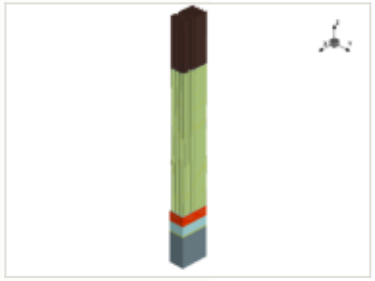

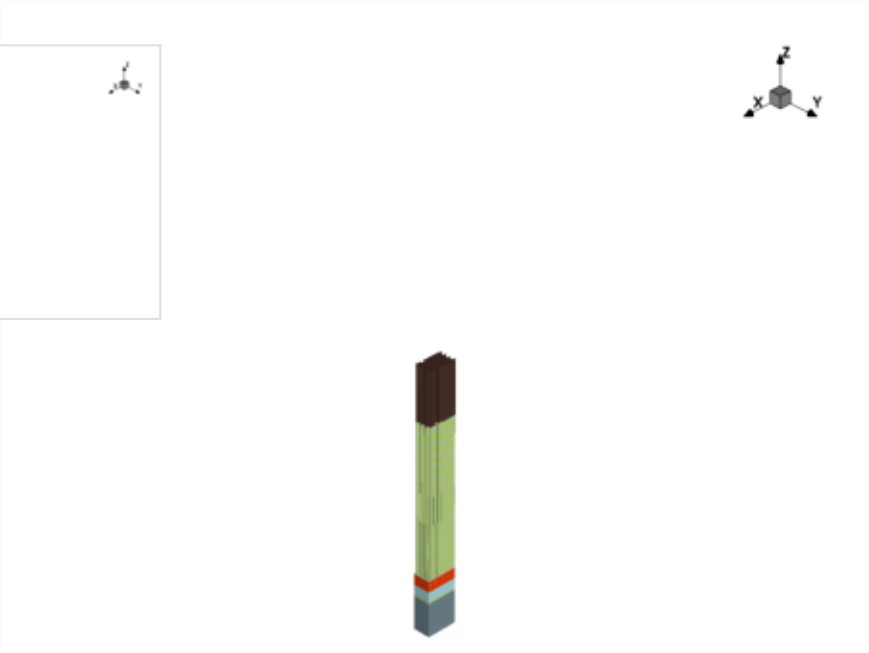

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

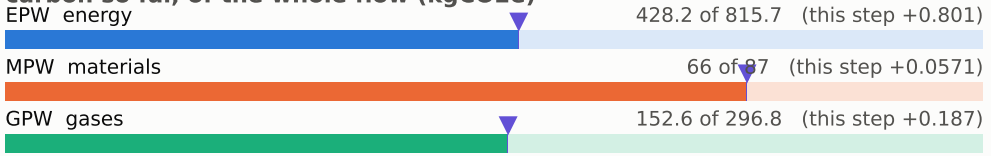

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

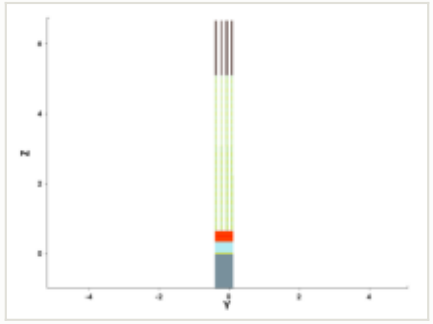

y cut at -0.150 µm

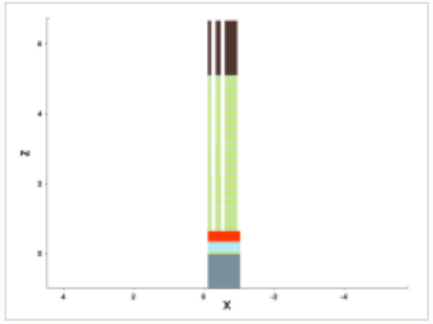

mask for this step

no mask for this step

steps by process area

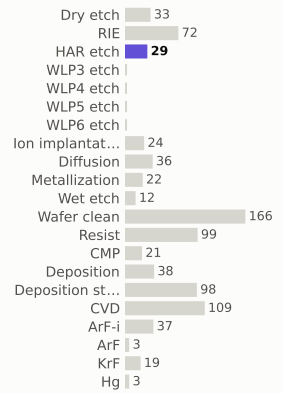

materials deposited (g)

gases emitted (g)

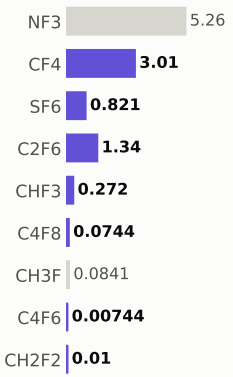

Step #16565.8163: HAR_etch

etch_noop · HAR_etch

1.04	647.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

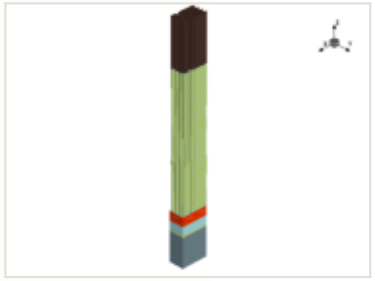

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

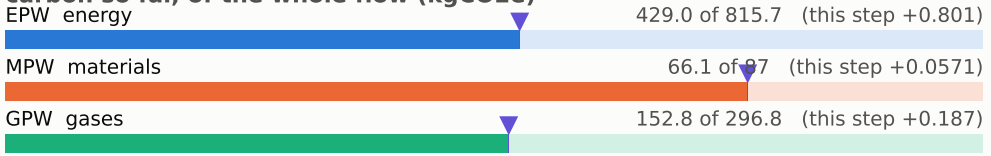

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

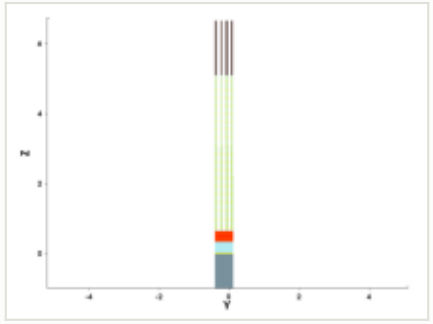

y cut at -0.150 µm

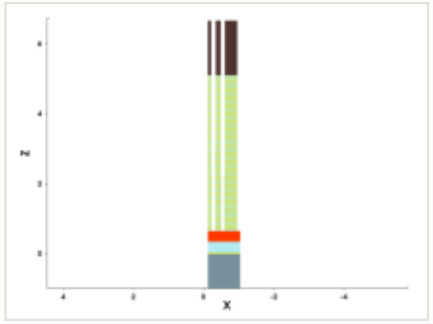

mask for this step

no mask for this step

steps by process area

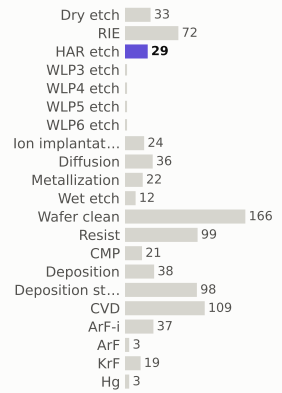

materials deposited (g)

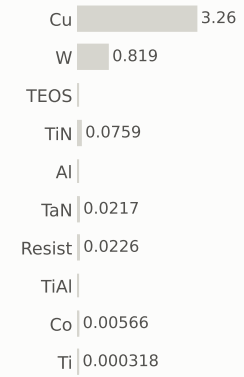

gases emitted (g)

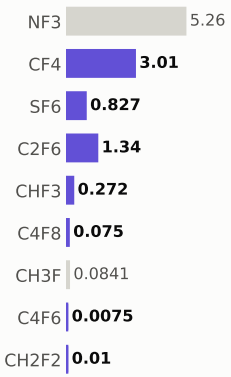

Step #16565.9184: HAR_etch

etch_noop · HAR_etch

1.04	648.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

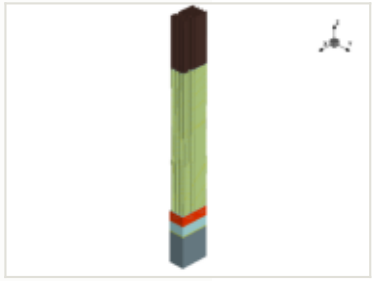

x cut at -0.570 µm

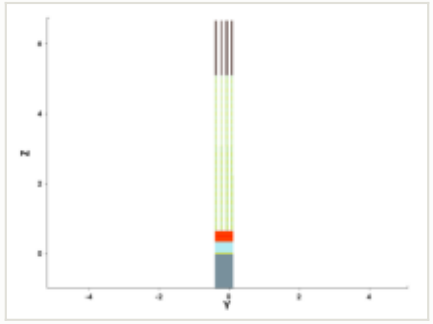

y cut at -0.150 µm

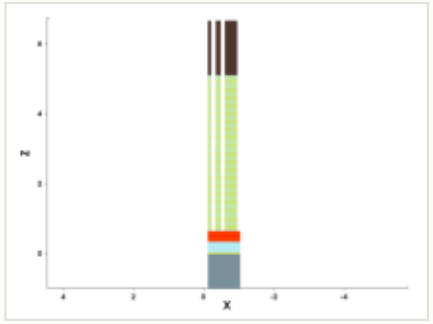

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

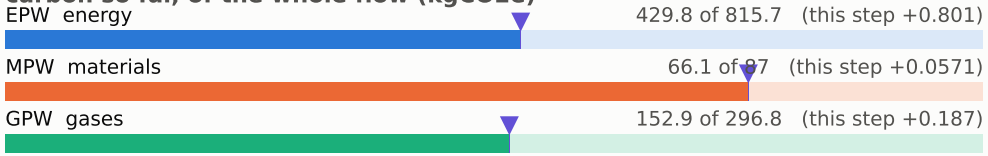

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

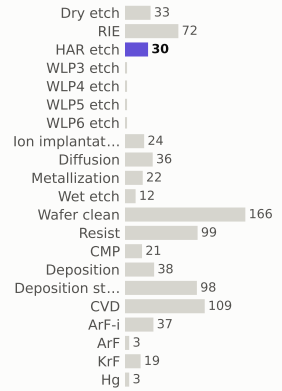

materials deposited (g)

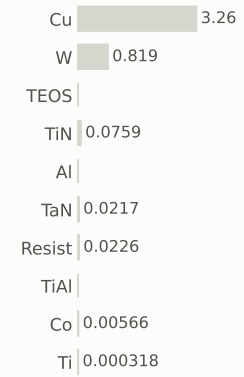

gases emitted (g)

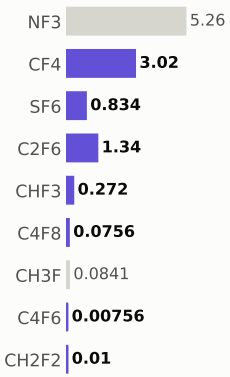

Step #16566.0204: HAR_etch

etch_noop · HAR_etch

1.04	649.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

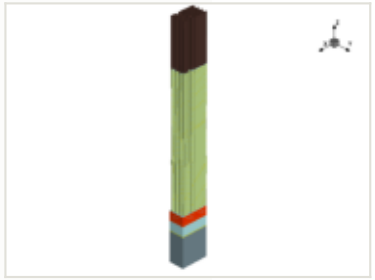

x cut at -0.570 µm

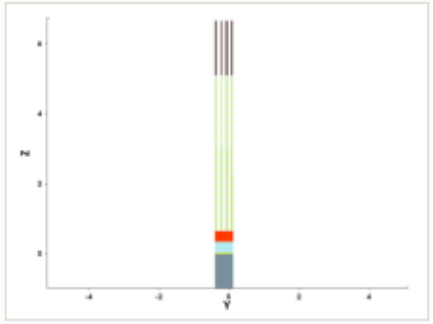

y cut at -0.150 µm

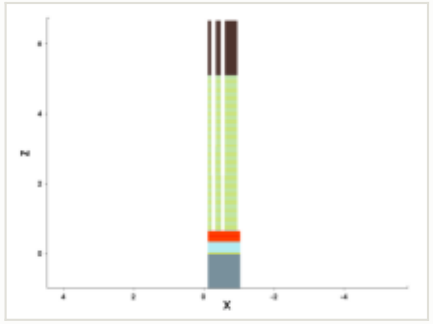

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

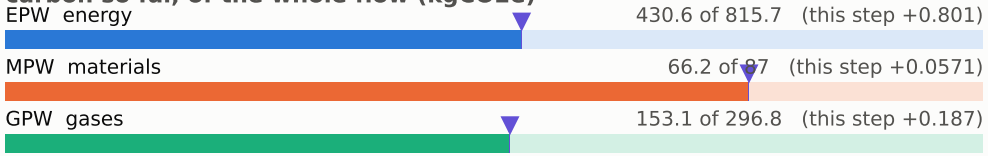

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

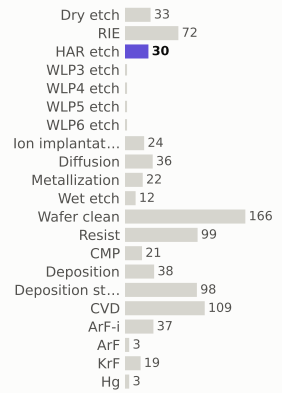

materials deposited (g)

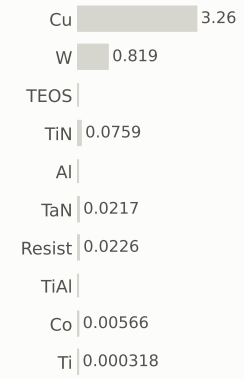

gases emitted (g)

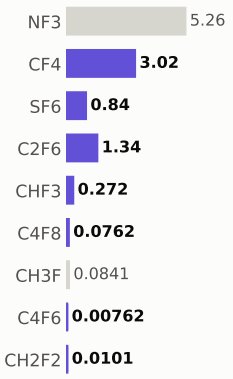

Step #16566.1224: HAR_etch

etch_noop · HAR_etch

1.04	651.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

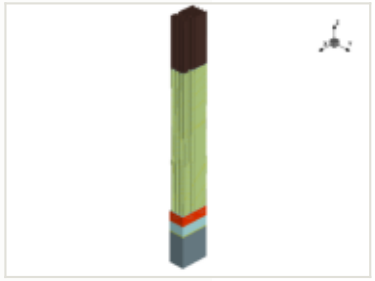

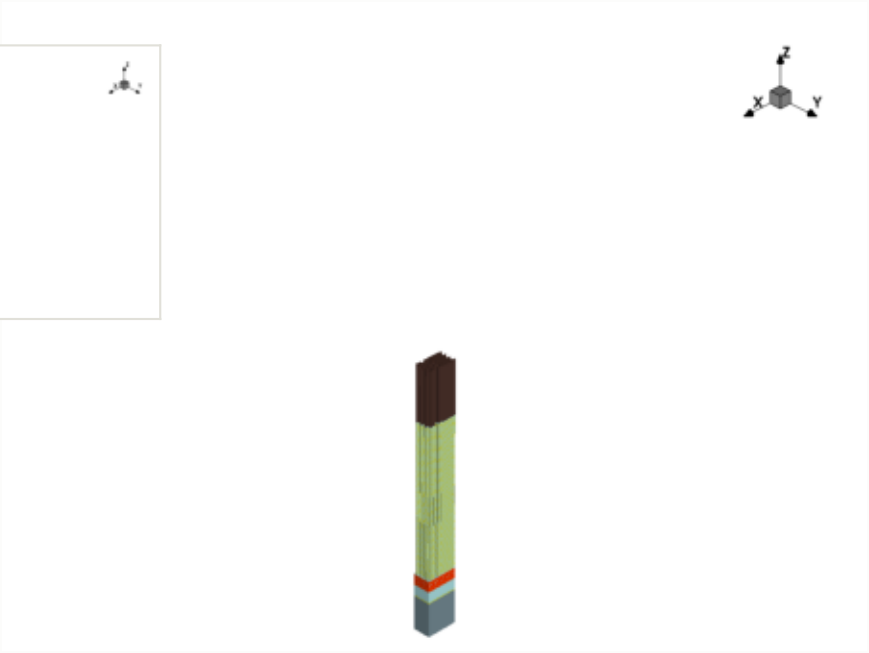

x cut at -0.570 µm

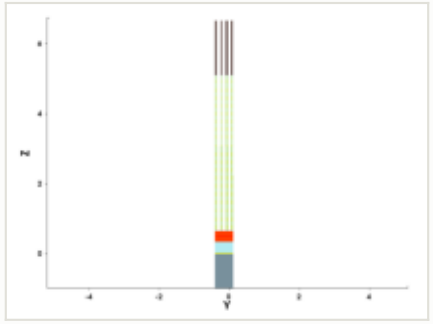

y cut at -0.150 µm

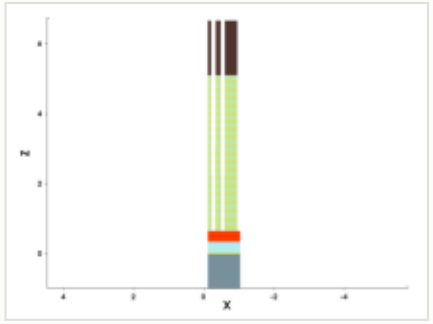

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

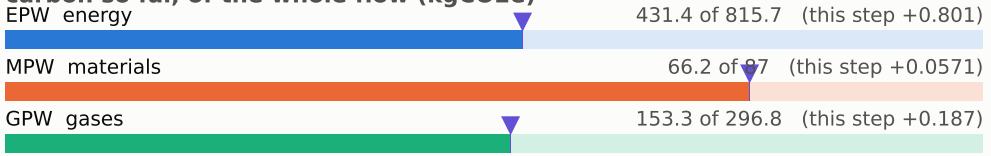

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

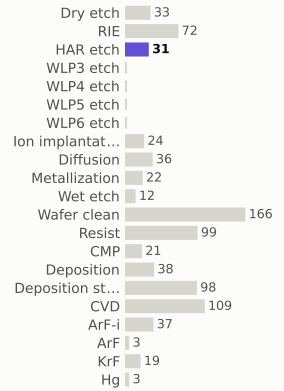

materials deposited (g)

gases emitted (g)

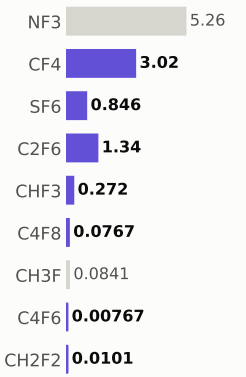

Step #16566.2245: HAR_etch

etch_noop · HAR_etch

1.04	652.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

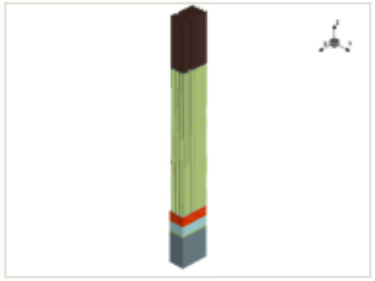

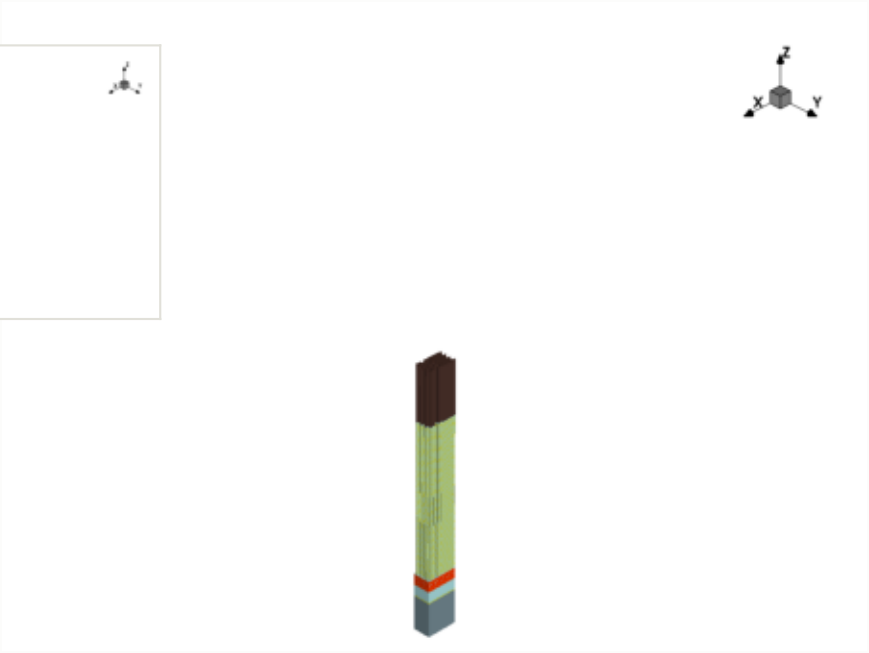

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

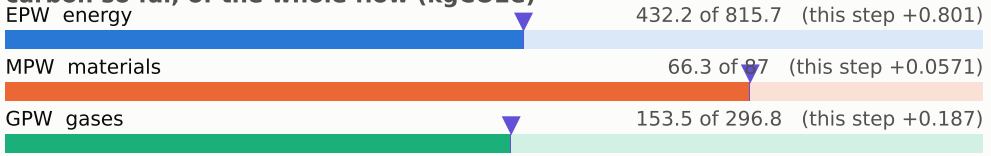

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

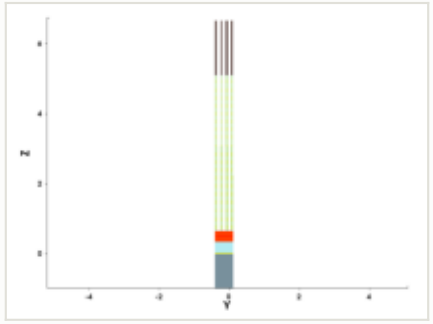

y cut at -0.150 µm

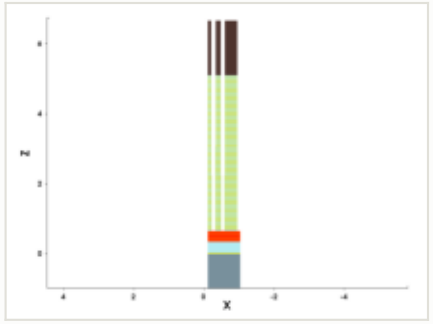

mask for this step

no mask for this step

steps by process area

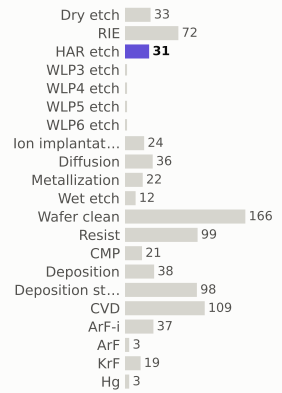

materials deposited (g)

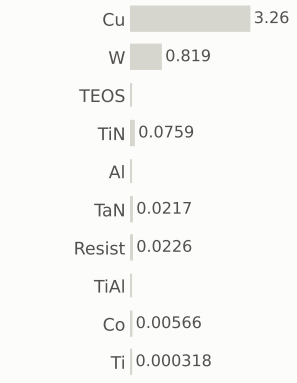

gases emitted (g)

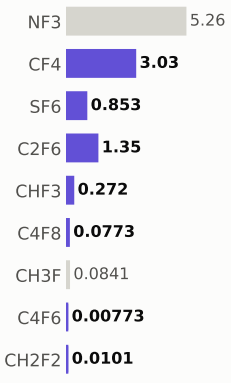

Step #16566.3265: HAR_etch

etch_noop · HAR_etch

1.04	653.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

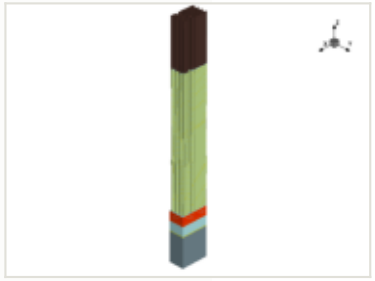

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

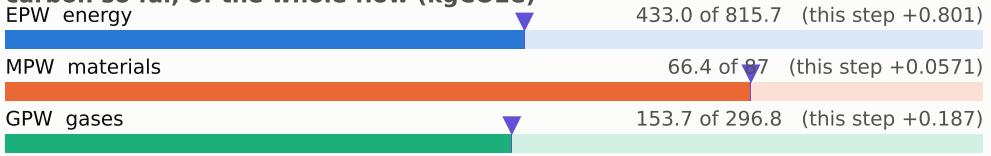

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

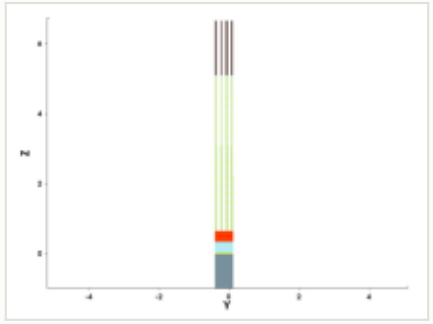

y cut at -0.150 µm

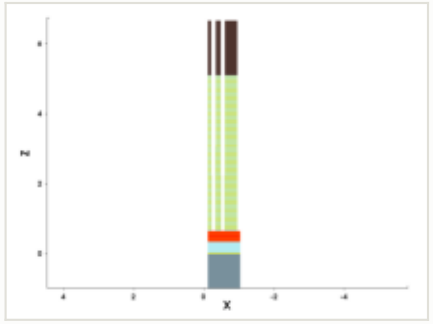

mask for this step

no mask for this step

steps by process area

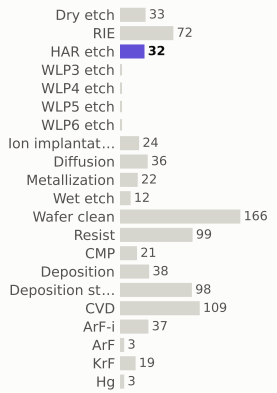

materials deposited (g)

gases emitted (g)

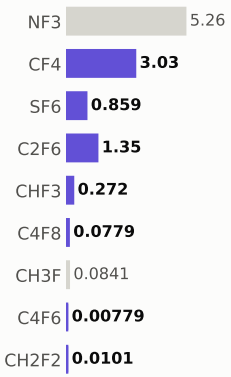

Step #16566.4286: HAR_etch

etch_noop · HAR_etch

1.04	654.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

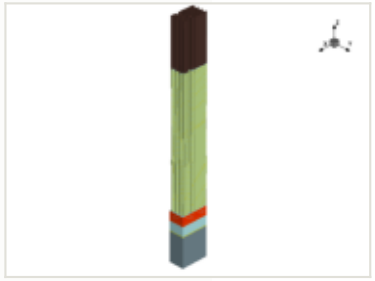

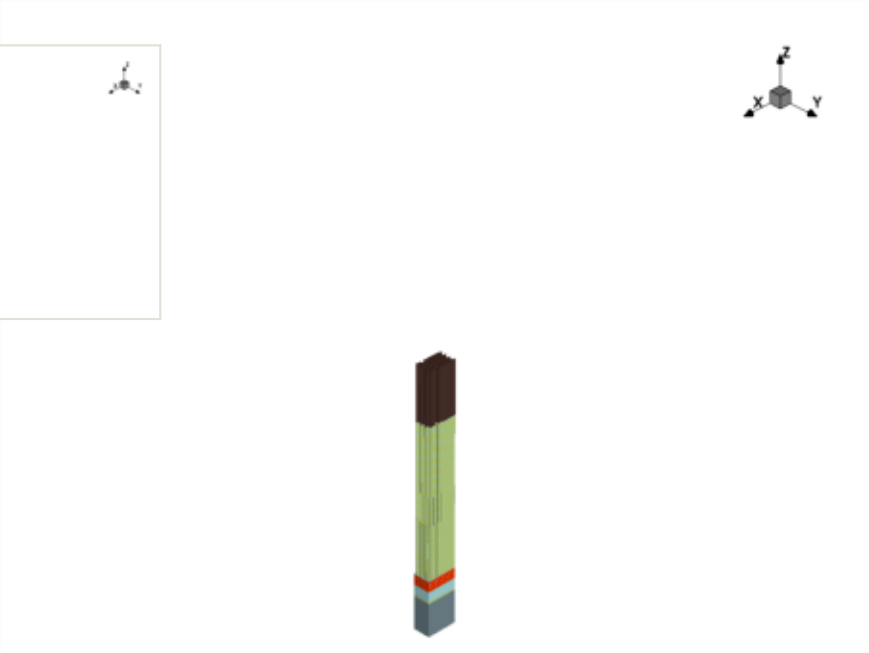

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

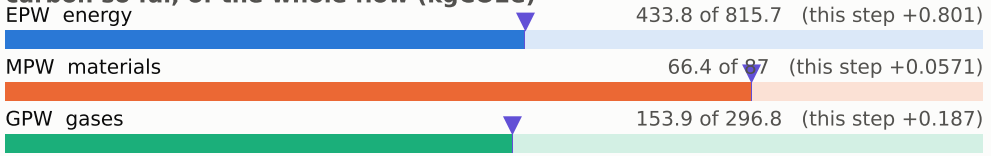

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

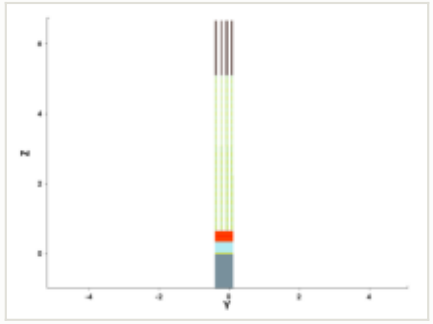

y cut at -0.150 µm

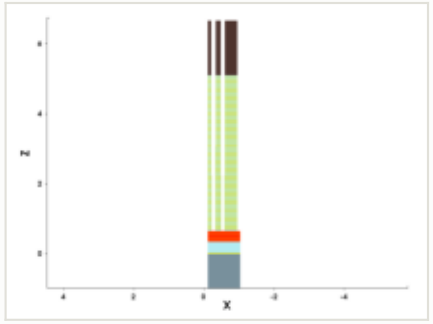

mask for this step

no mask for this step

steps by process area

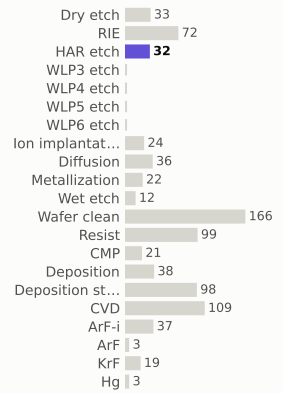

materials deposited (g)

gases emitted (g)

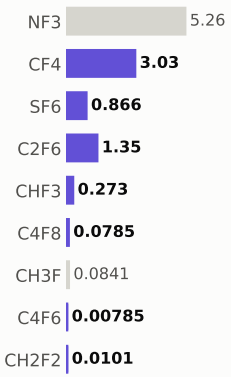

Step #16566.5306: HAR_etch

etch_noop · HAR_etch

1.04	655.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

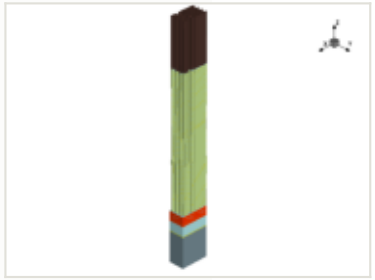

x cut at -0.570 µm

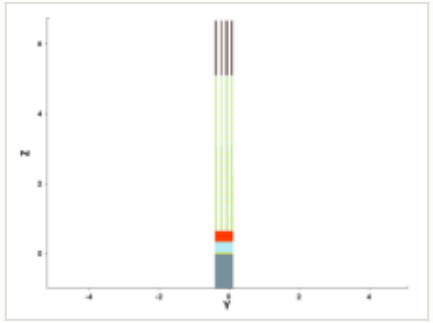

y cut at -0.150 µm

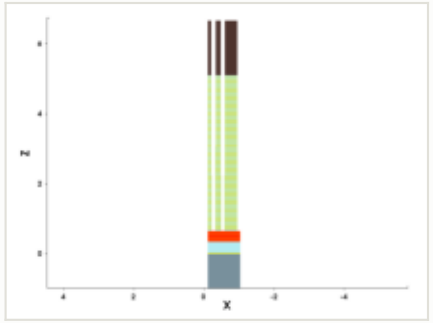

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

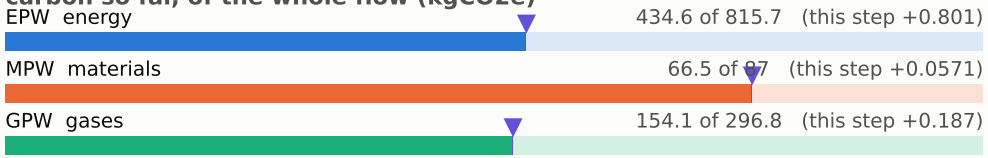

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

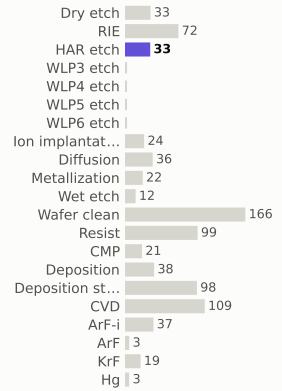

materials deposited (g)

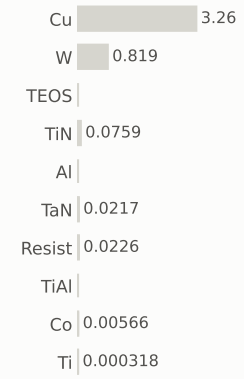

gases emitted (g)

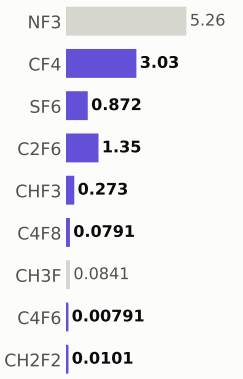

Step #16566.632700000002: HAR_etch

etch_noop · HAR_etch

1.04	656.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

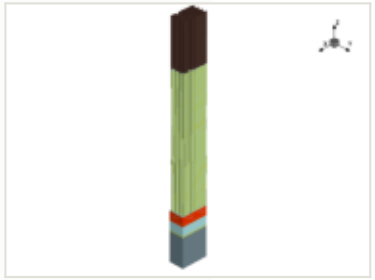

x cut at -0.570 µm

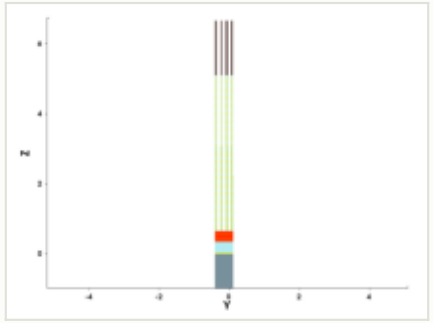

y cut at -0.150 µm

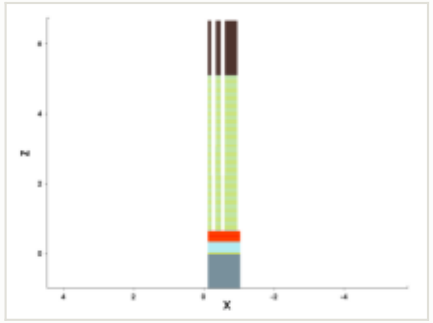

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

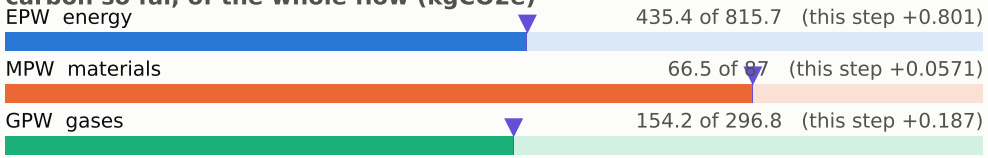

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

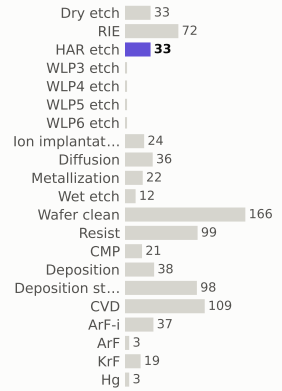

materials deposited (g)

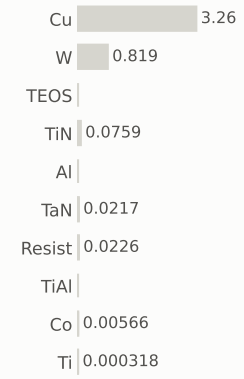

gases emitted (g)

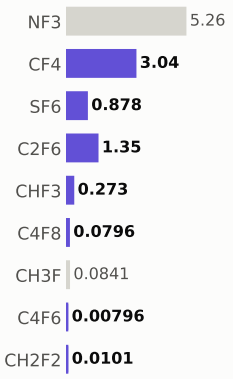

Step #16566.7347: HAR_etch

etch_noop · HAR_etch

1.04	657.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

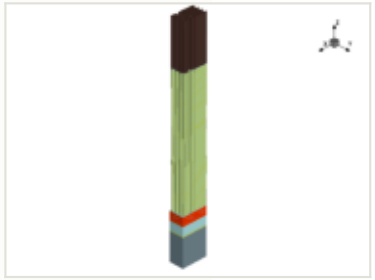

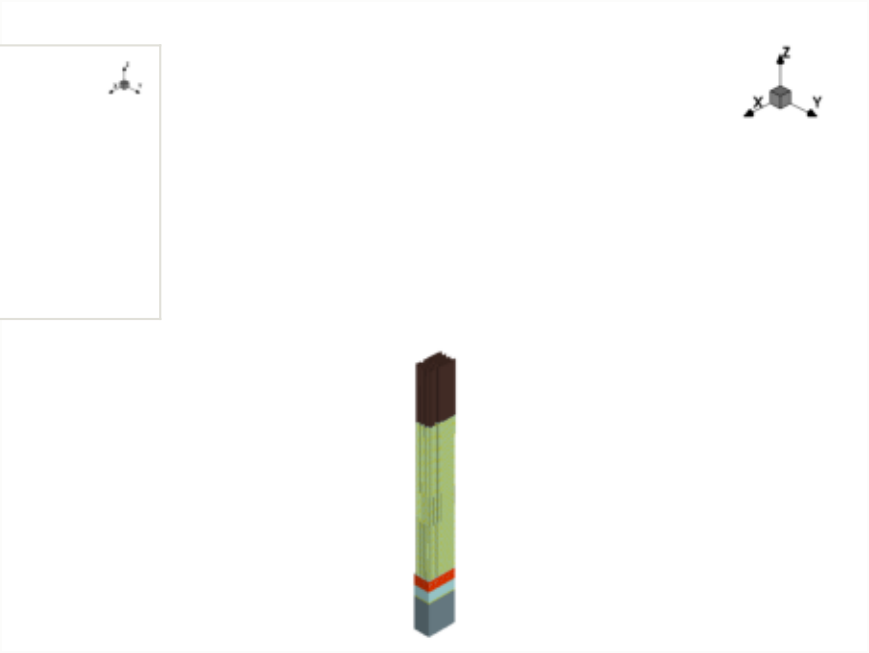

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

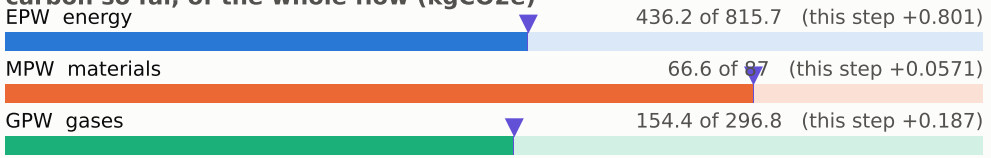

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

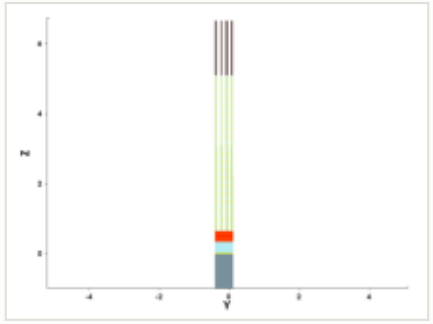

y cut at -0.150 µm

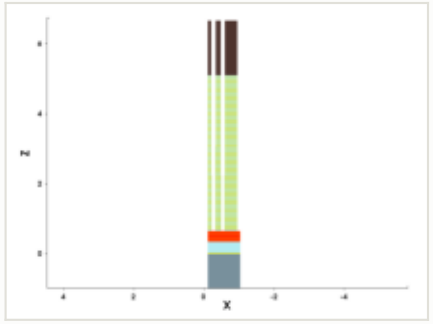

mask for this step

no mask for this step

steps by process area

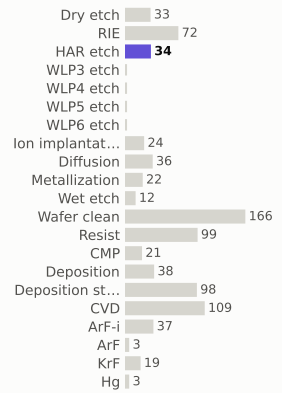

materials deposited (g)

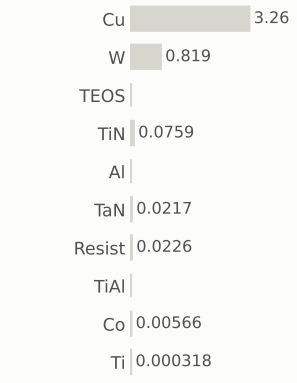

gases emitted (g)

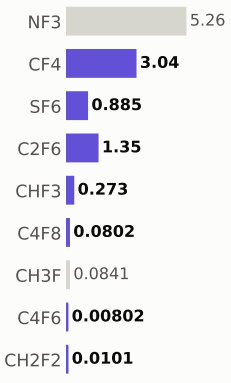

Step #16566.8367: HAR_etch

etch_noop · HAR_etch

1.04	658.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

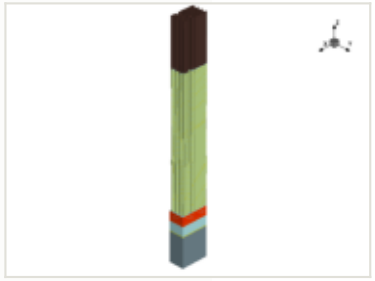

x cut at -0.570 µm

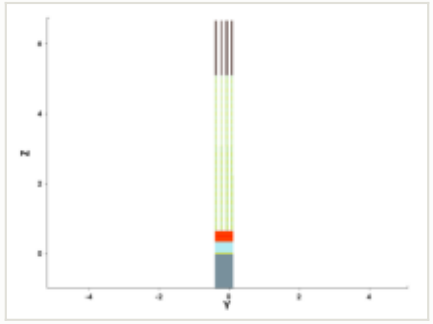

y cut at -0.150 µm

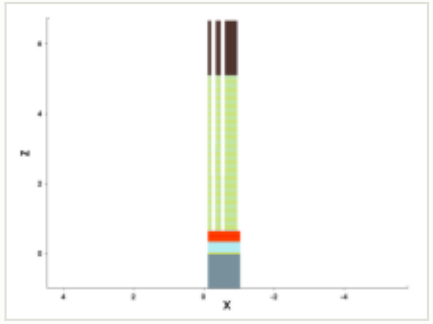

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

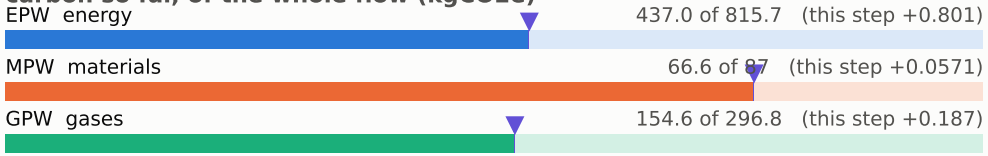

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

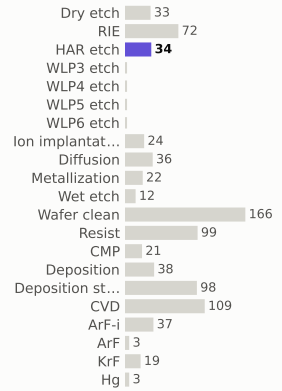

materials deposited (g)

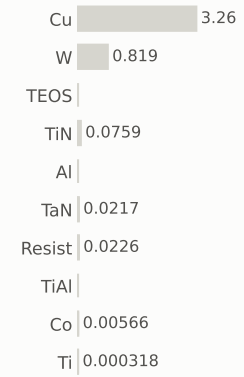

gases emitted (g)

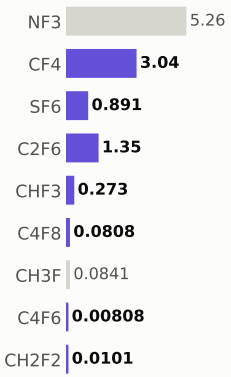

Step #16566.9388: HAR_etch

etch_noop · HAR_etch

1.04	659.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

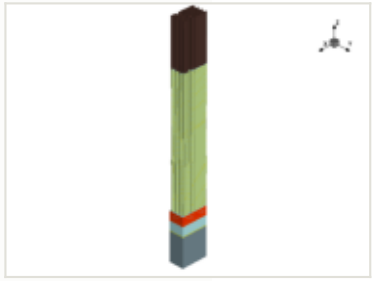

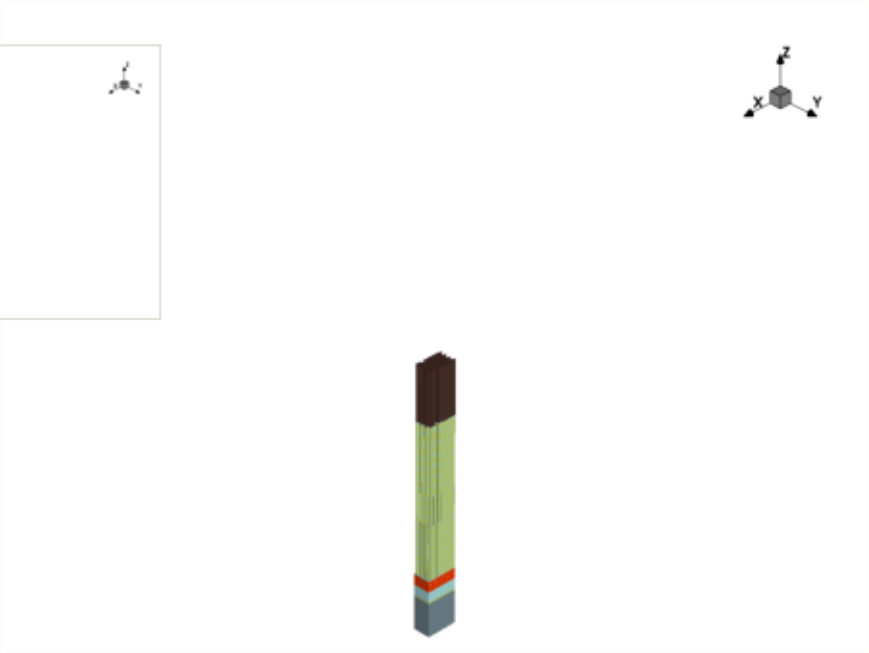

x cut at -0.570 µm

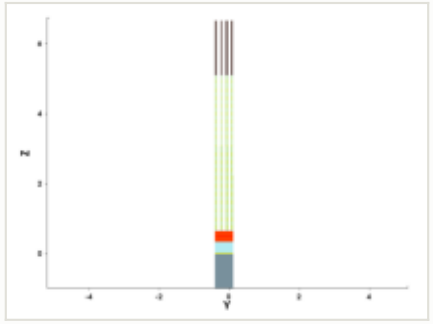

y cut at -0.150 µm

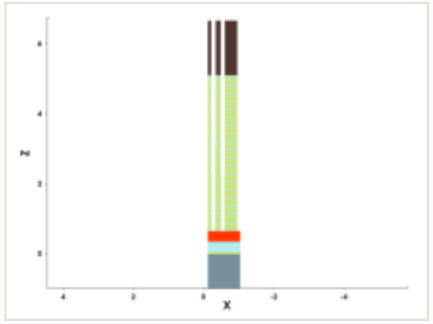

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

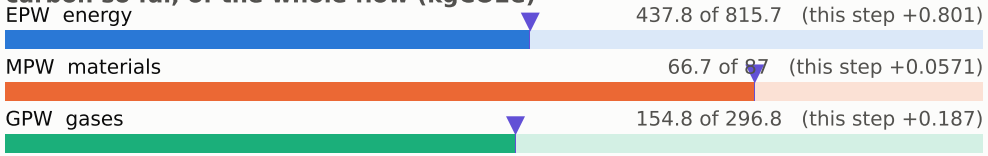

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

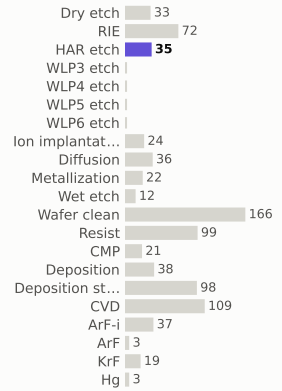

materials deposited (g)

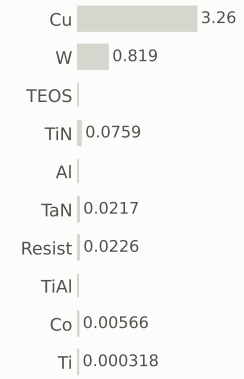

gases emitted (g)

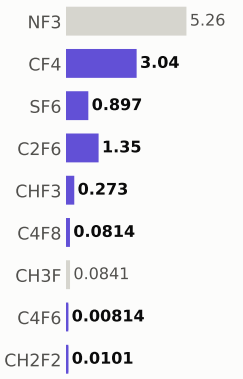

Step #16567.0408: HAR_etch

etch_noop · HAR_etch

1.04	660.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

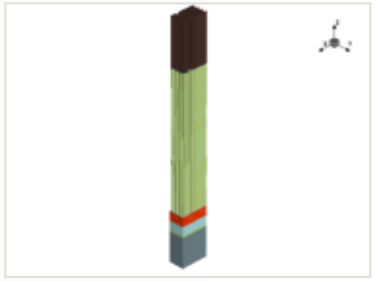

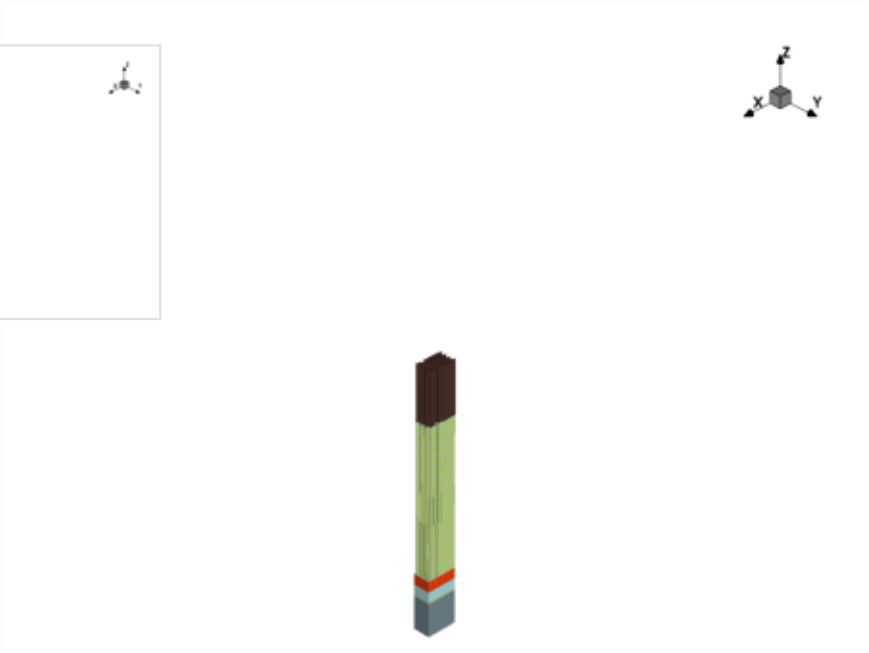

x cut at -0.570 µm

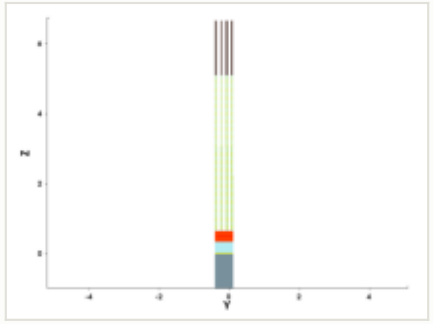

y cut at -0.150 µm

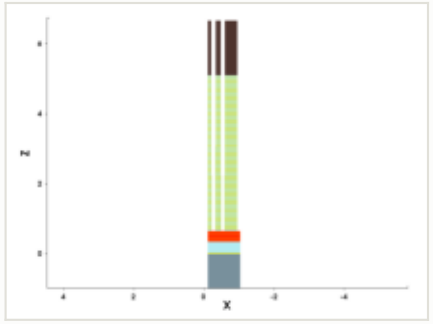

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

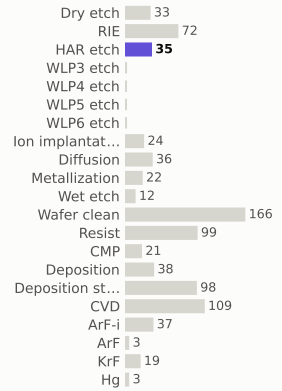

materials deposited (g)

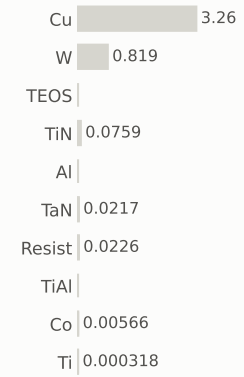

gases emitted (g)

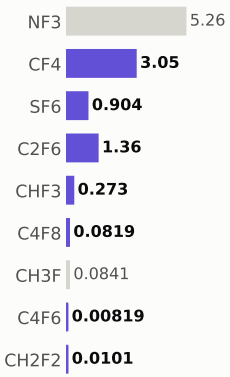

Step #16567.1429: HAR_etch

etch_noop · HAR_etch

1.04	661.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

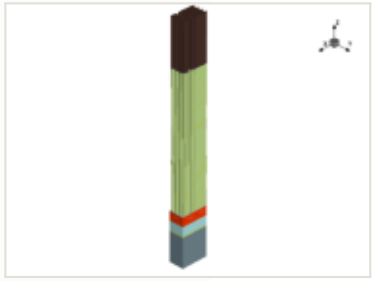

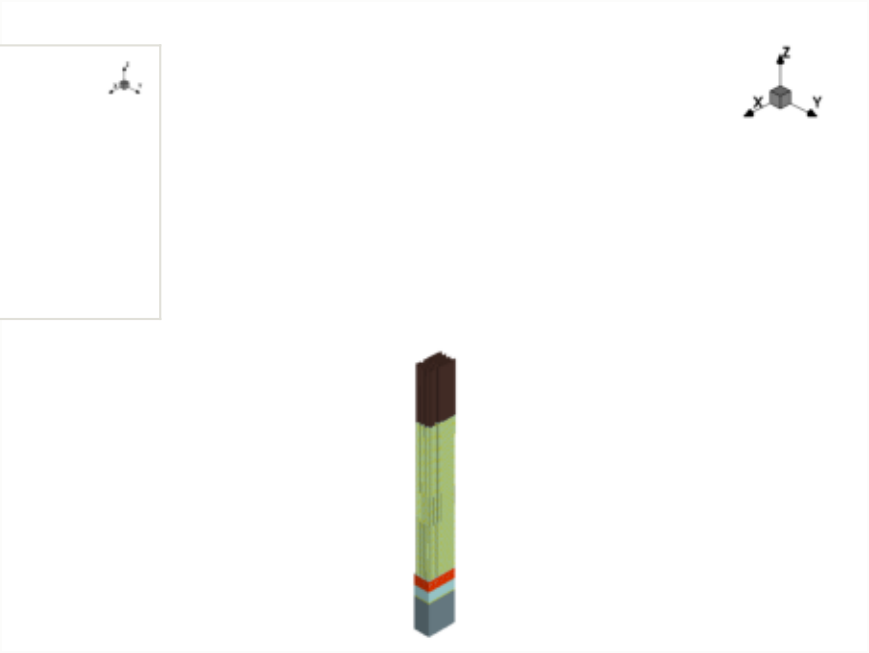

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

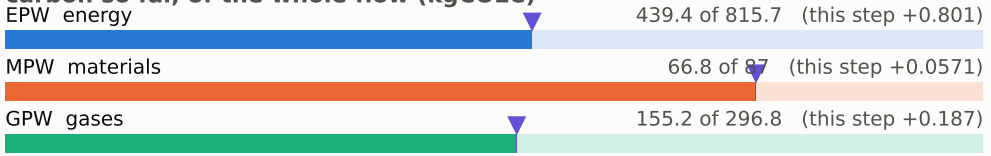

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

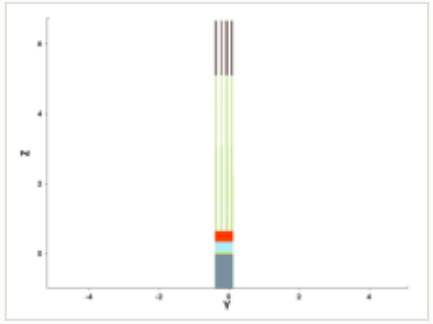

y cut at -0.150 µm

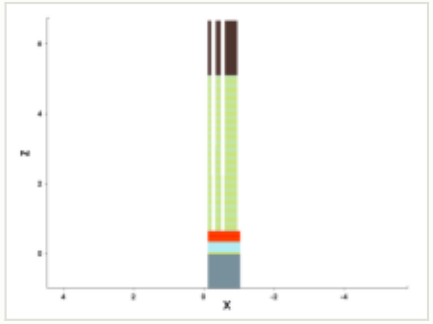

mask for this step

no mask for this step

steps by process area

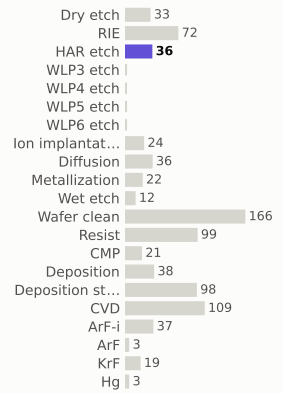

materials deposited (g)

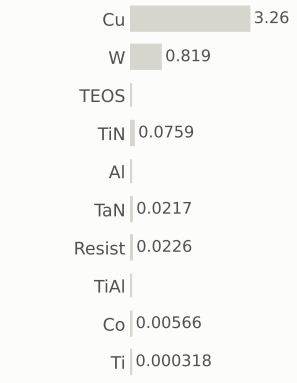

gases emitted (g)

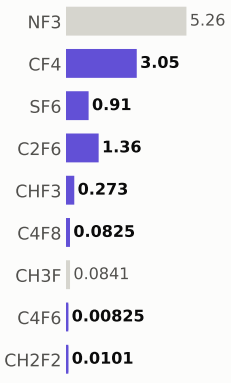

Step #16567.244899999998: HAR_etch

etch_noop · HAR_etch

1.04	662.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

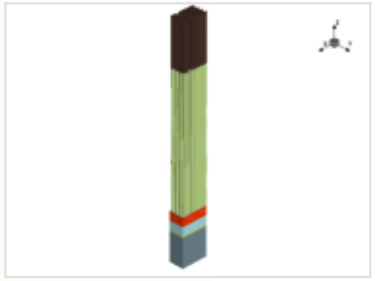

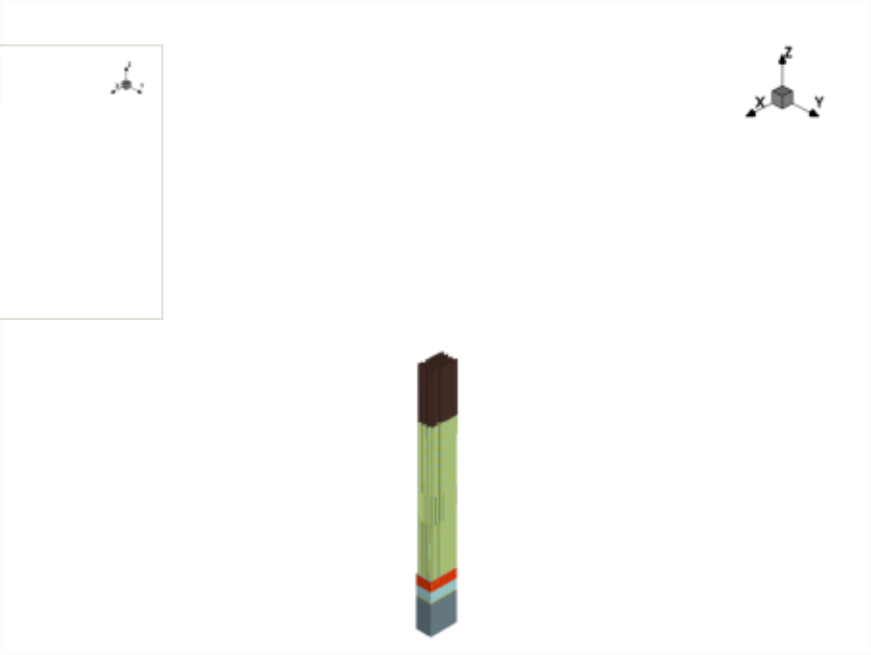

x cut at -0.570 µm

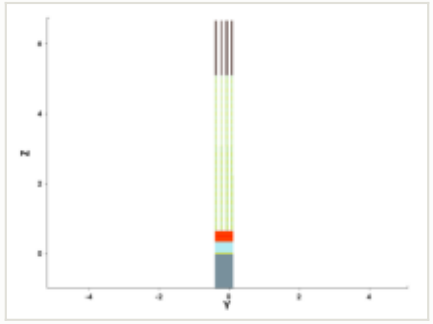

y cut at -0.150 µm

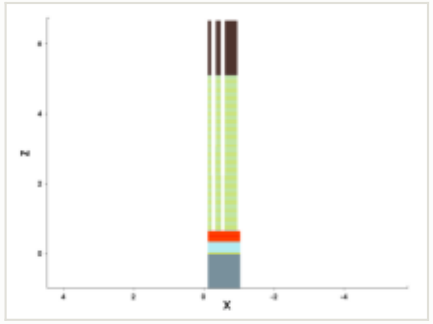

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

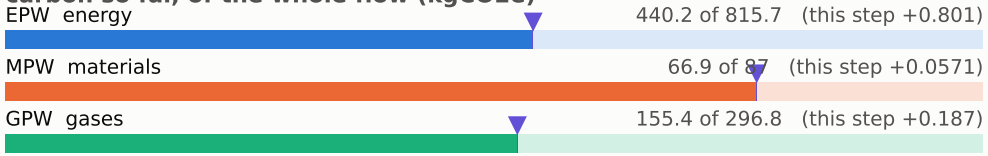

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

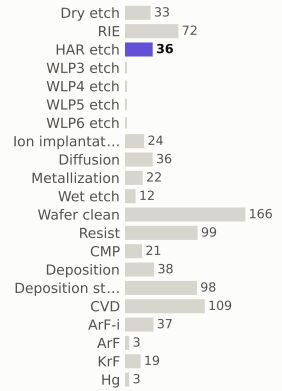

materials deposited (g)

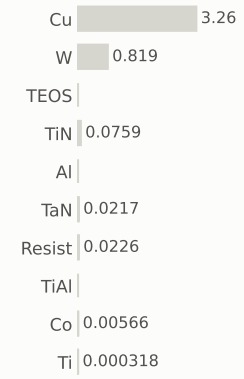

gases emitted (g)

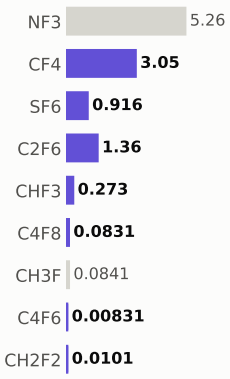

Step #16567.3469: HAR_etch

etch_noop · HAR_etch

1.04	663.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

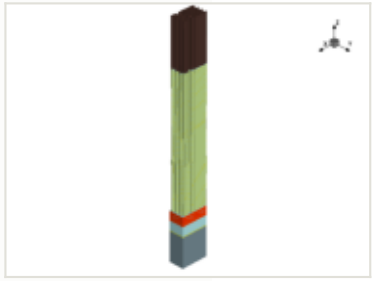

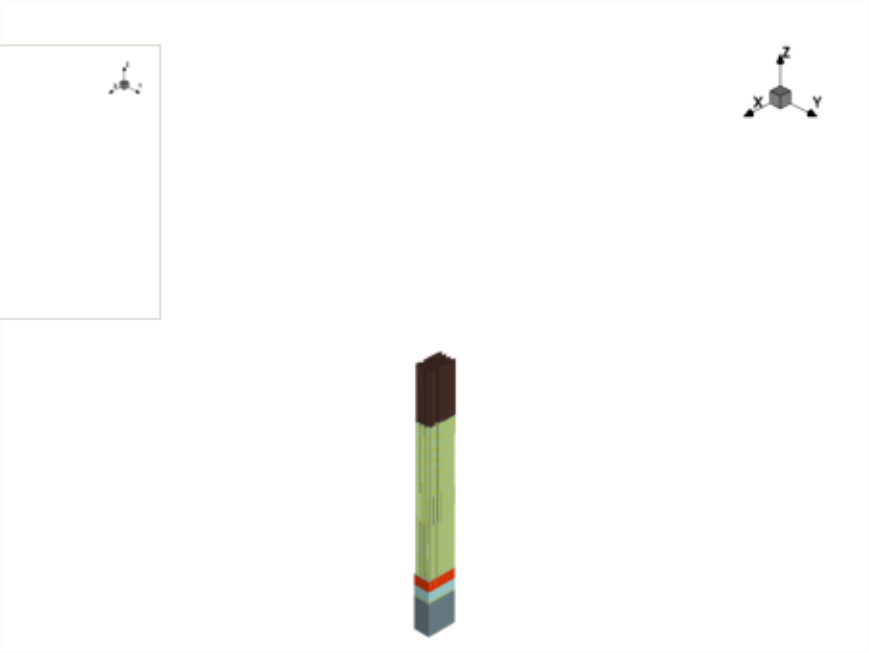

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

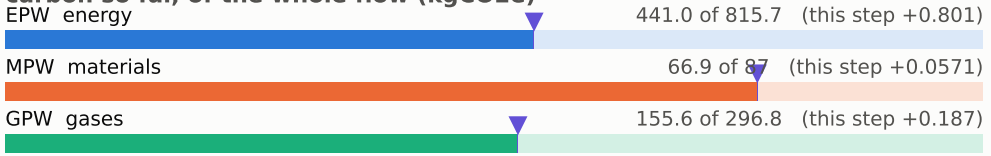

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

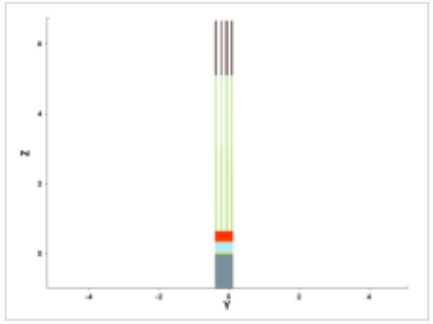

y cut at -0.150 µm

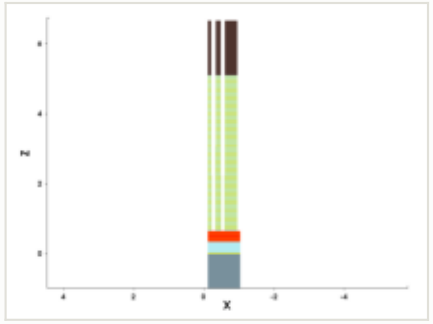

mask for this step

no mask for this step

steps by process area

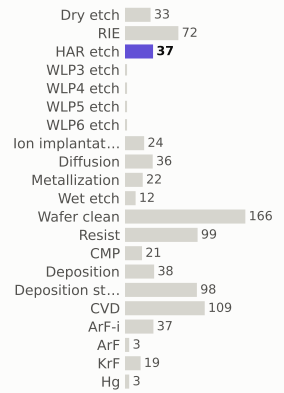

materials deposited (g)

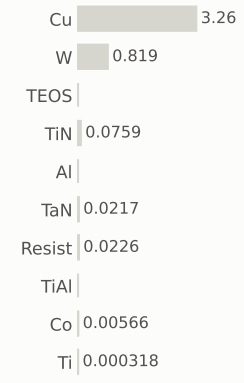

gases emitted (g)

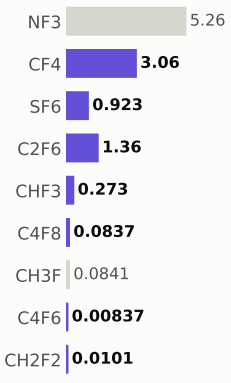

Step #16567.449: HAR_etch

etch_noop · HAR_etch

1.04	664.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

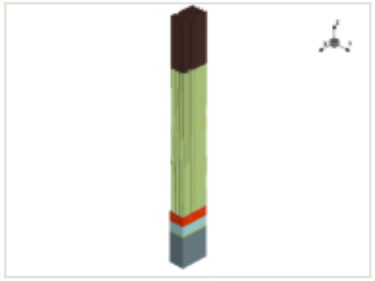

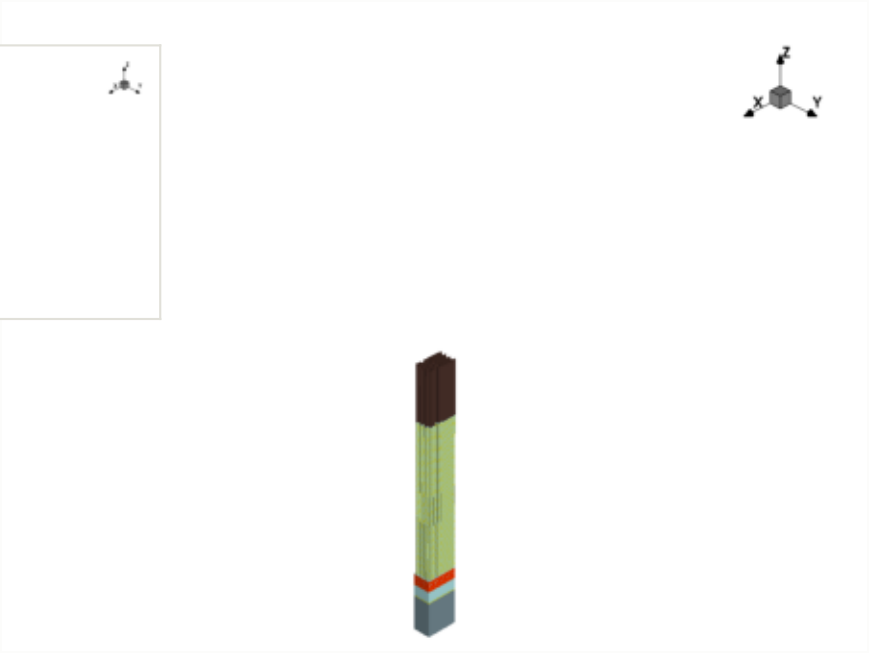

x cut at -0.570 µm

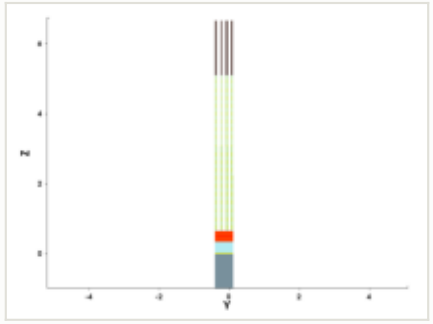

y cut at -0.150 µm

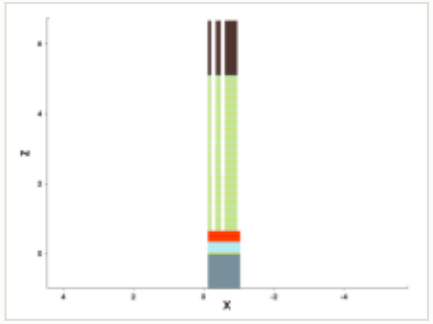

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

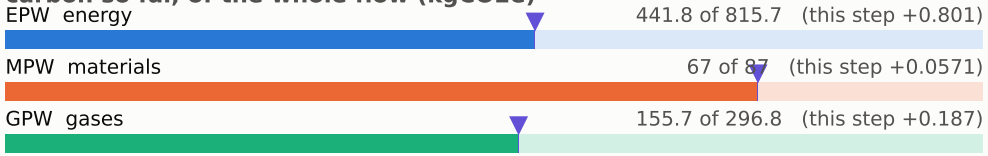

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

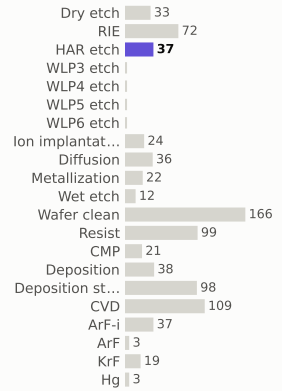

materials deposited (g)

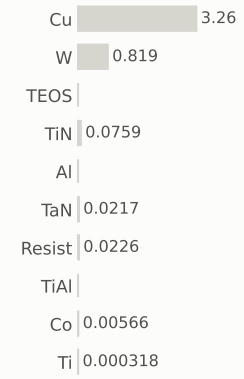

gases emitted (g)

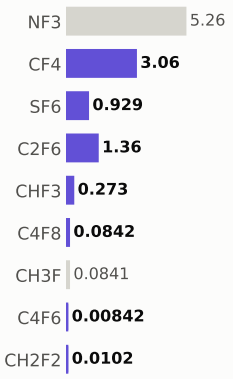

Step #16567.551: HAR_etch

etch_noop · HAR_etch

1.04	665.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

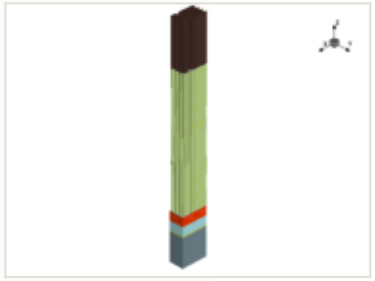

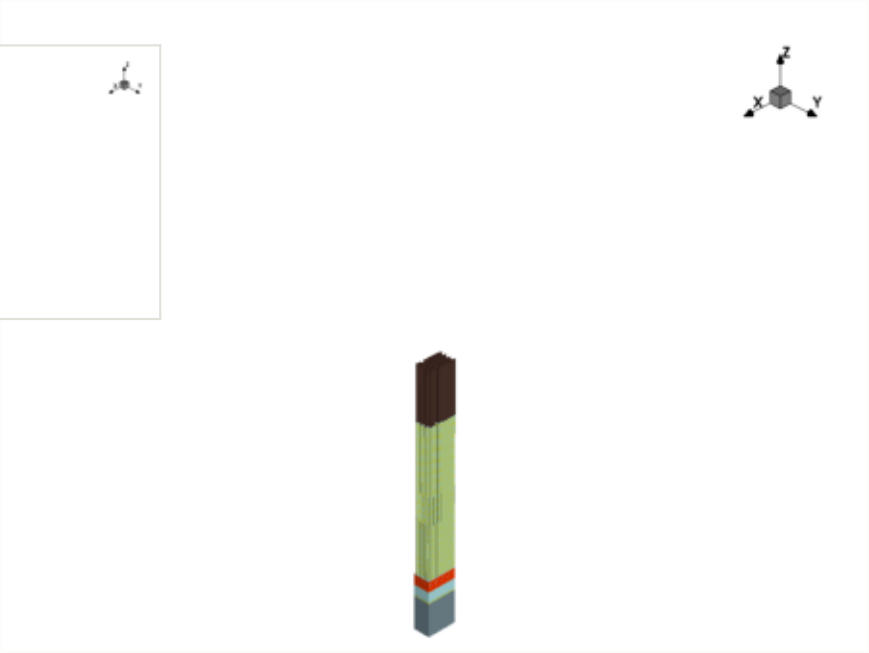

x cut at -0.570 µm

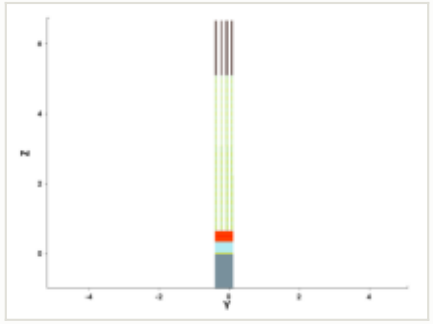

y cut at -0.150 µm

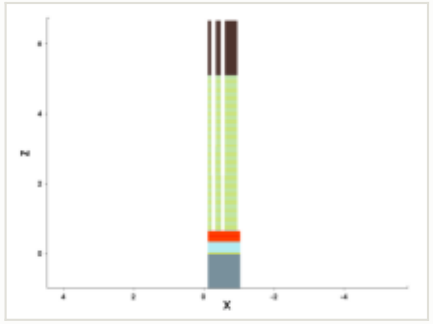

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

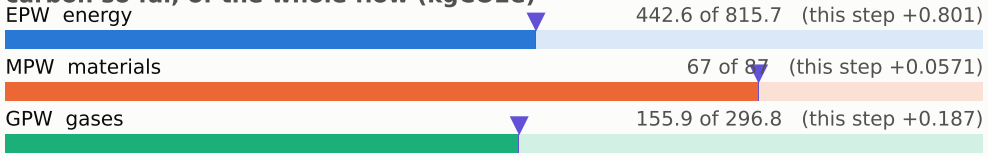

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

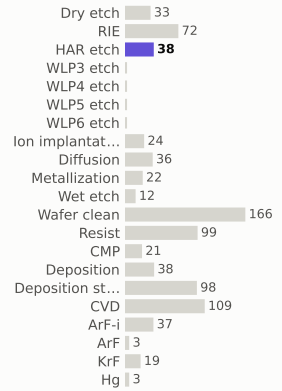

materials deposited (g)

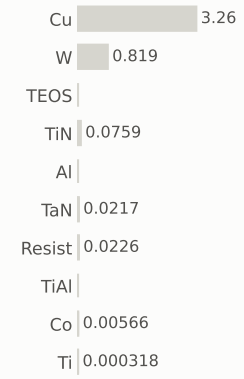

gases emitted (g)

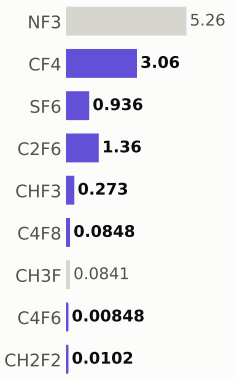

Step #16567.6531: HAR_etch

etch_noop · HAR_etch

1.04	666.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

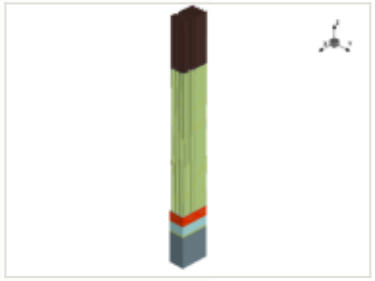

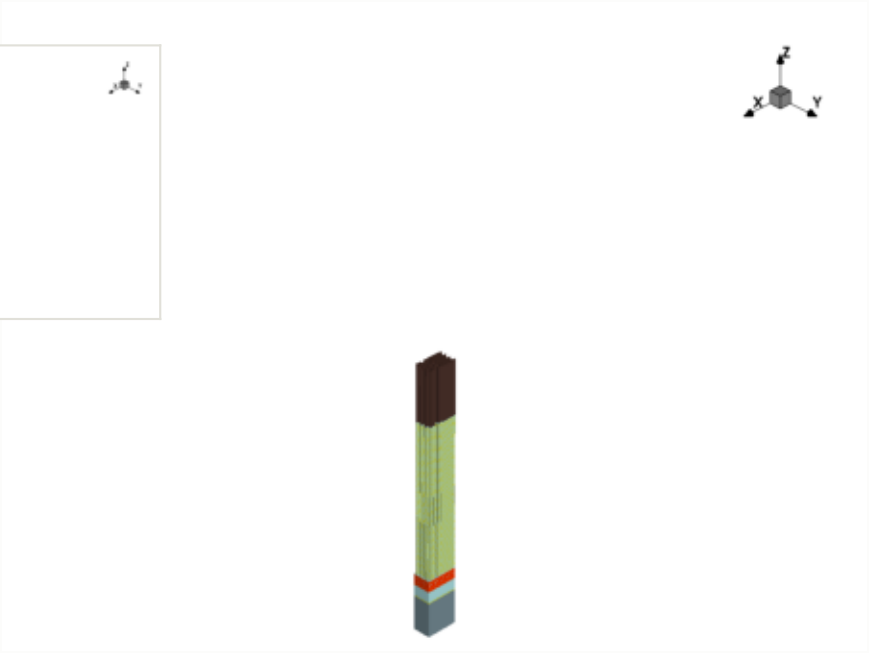

x cut at -0.570 µm

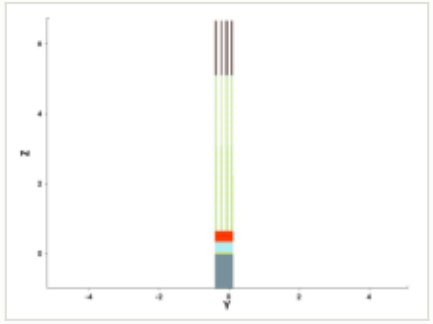

y cut at -0.150 µm

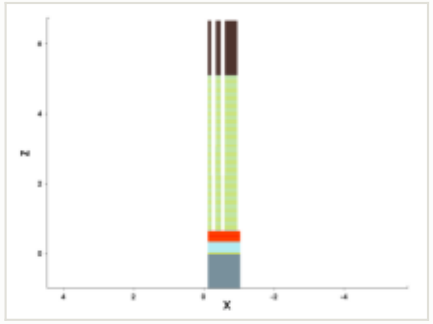

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

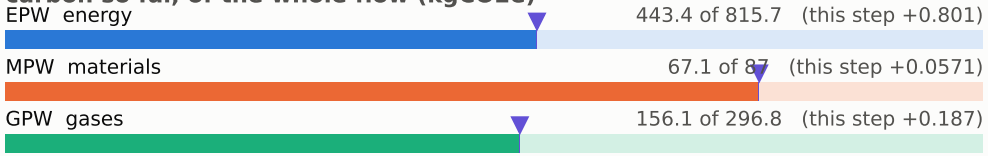

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

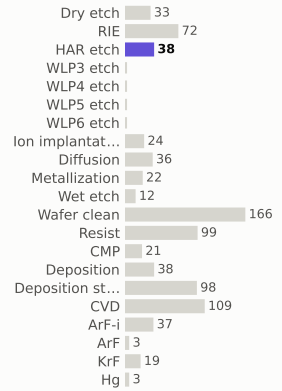

materials deposited (g)

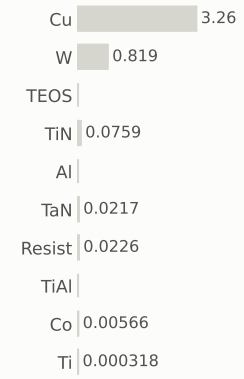

gases emitted (g)

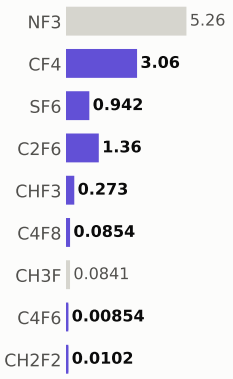

Step #16567.755100000002: HAR_etch

etch_noop · HAR_etch

1.04	667.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

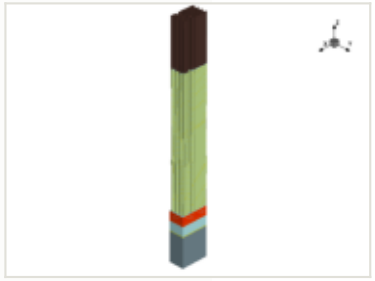

x cut at -0.570 µm

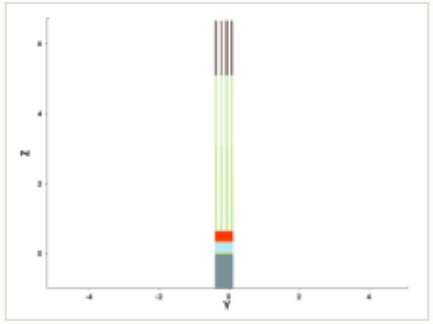

y cut at -0.150 µm

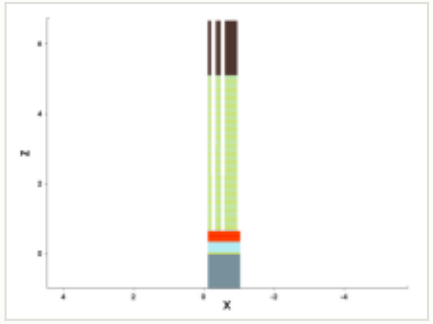

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

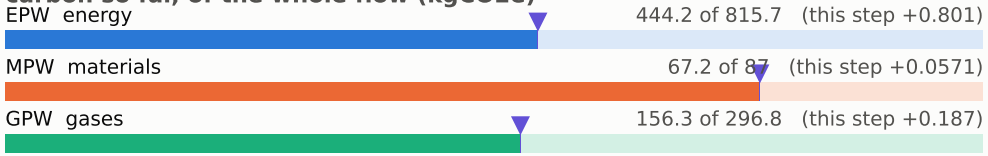

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

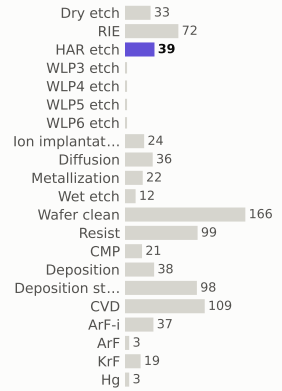

materials deposited (g)

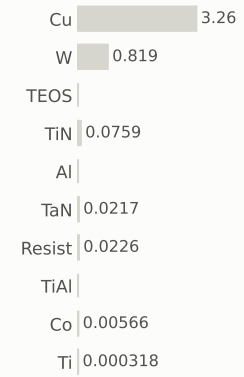

gases emitted (g)

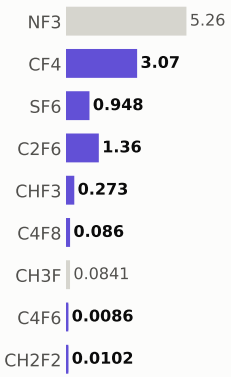

Step #16567.8571: HAR_etch

etch_noop · HAR_etch

1.04	668.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

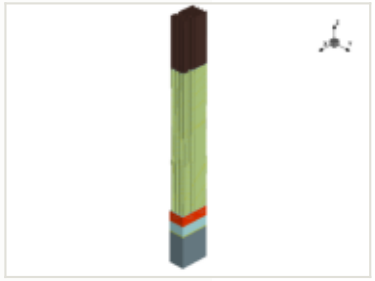

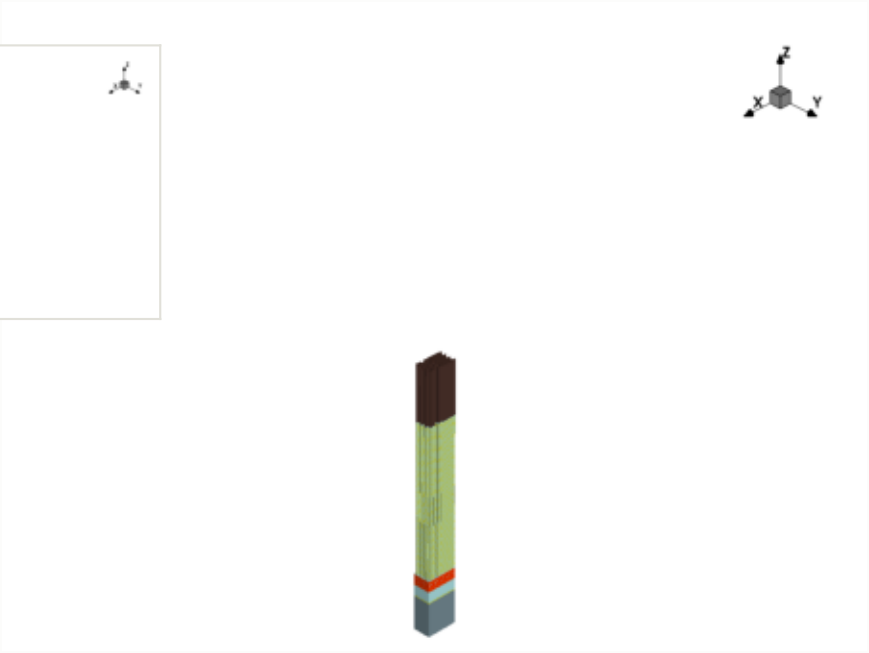

x cut at -0.570 µm

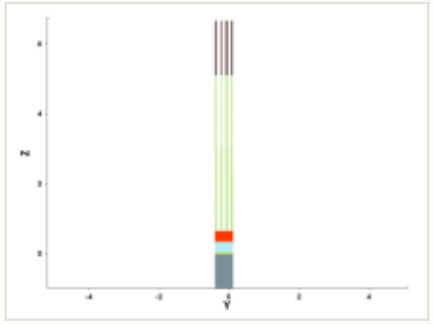

y cut at -0.150 µm

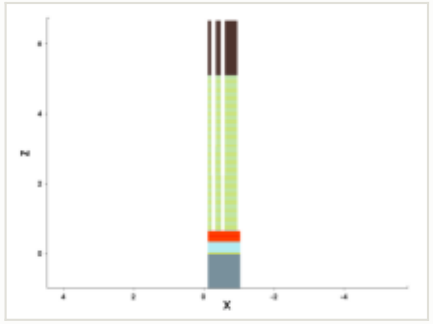

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

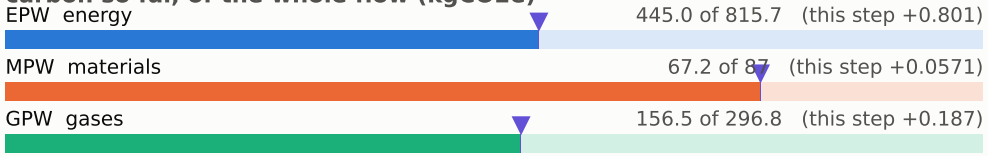

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

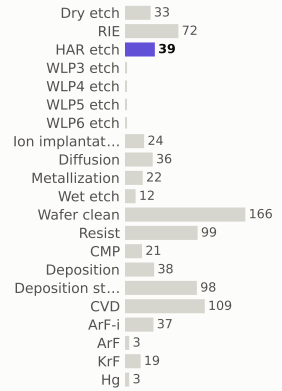

materials deposited (g)

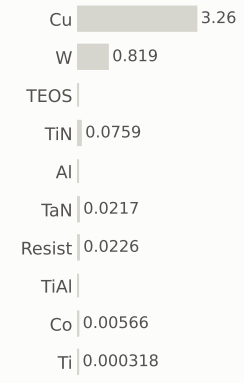

gases emitted (g)

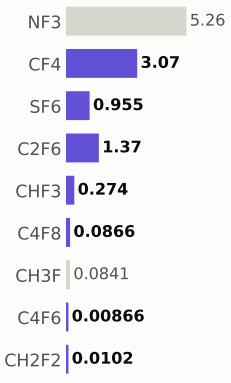

Step #16567.9592: HAR_etch

etch_noop · HAR_etch

1.04	669.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

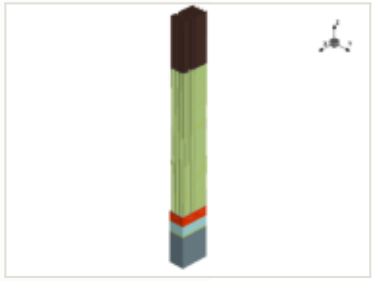

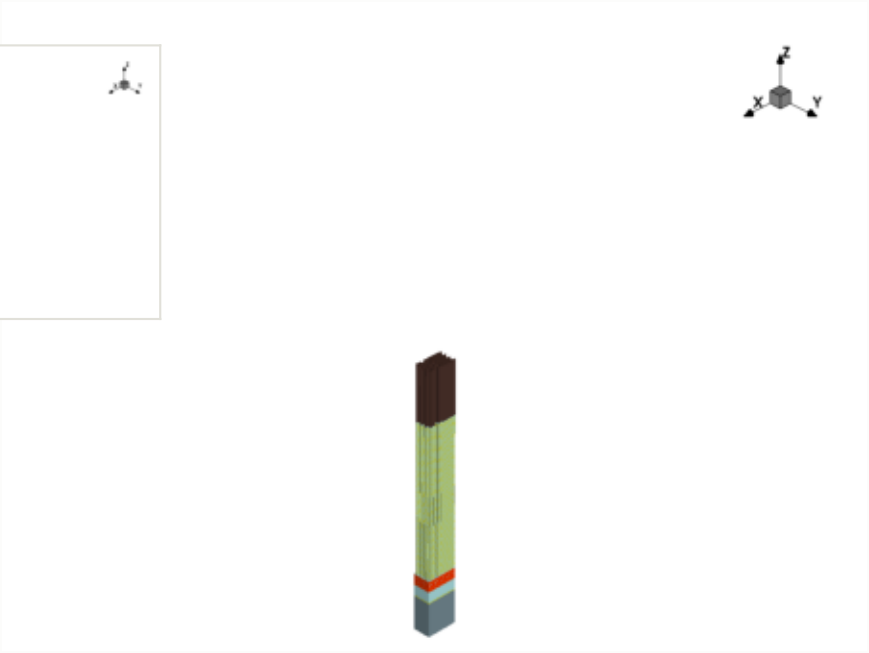

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

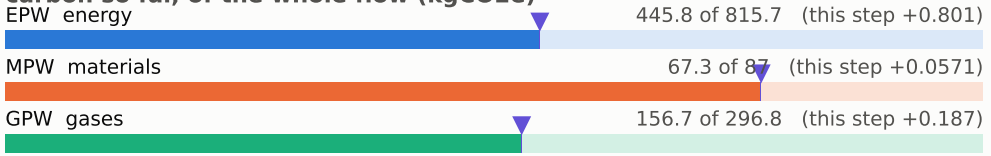

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

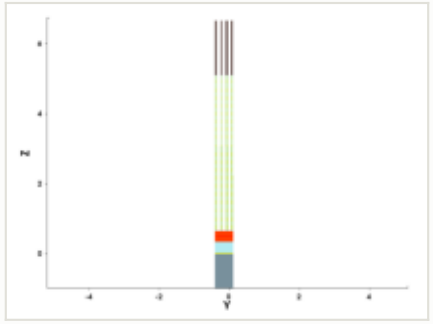

y cut at -0.150 µm

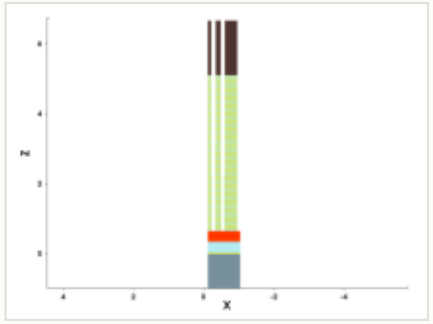

mask for this step

no mask for this step

steps by process area

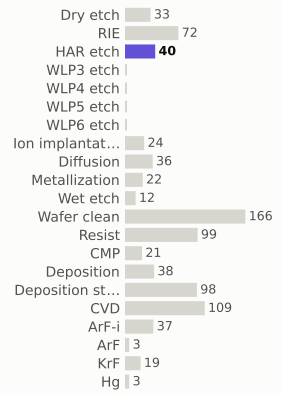

materials deposited (g)

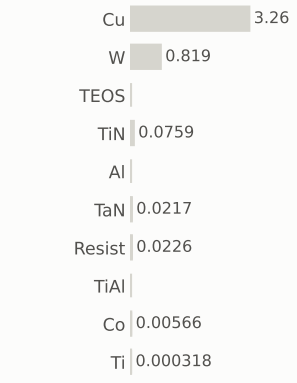

gases emitted (g)

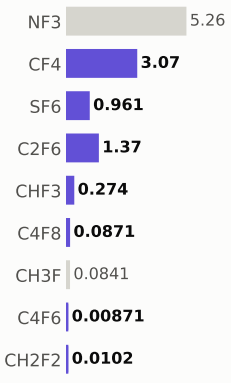

Step #16568.0612: HAR_etch

etch_noop · HAR_etch

1.04	670.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

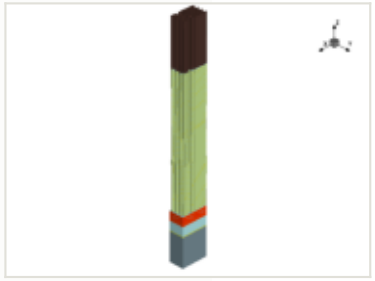

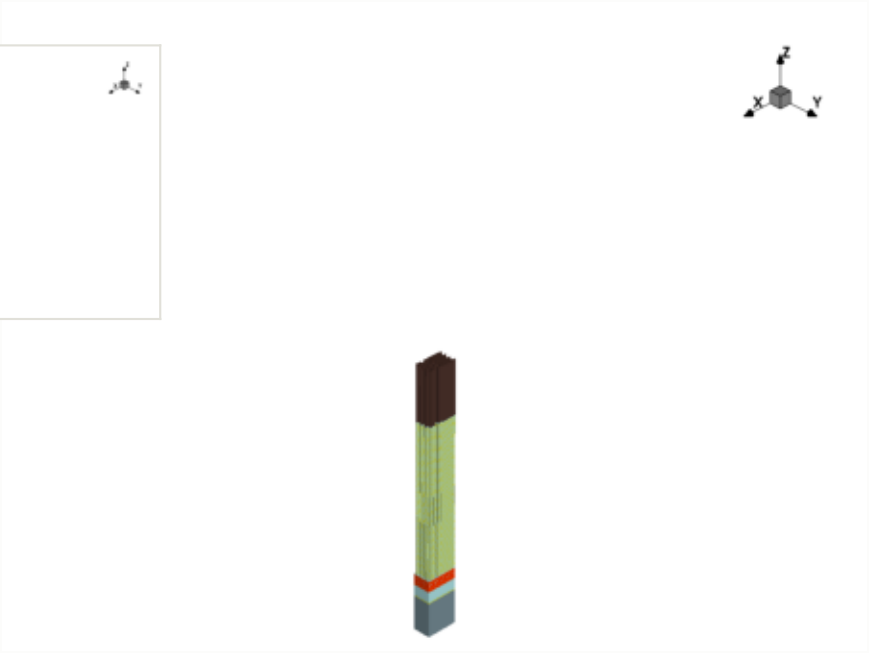

x cut at -0.570 µm

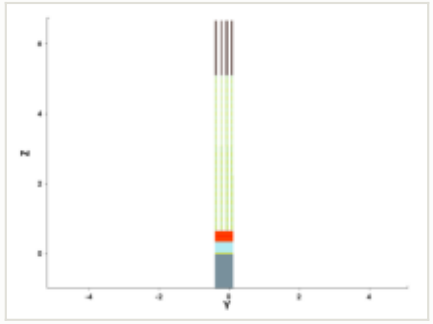

y cut at -0.150 µm

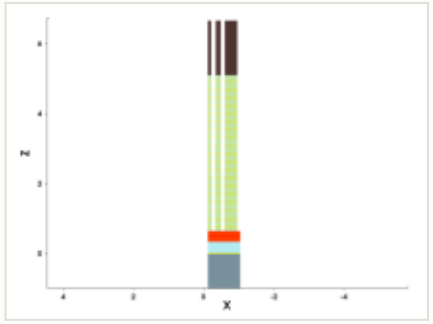

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

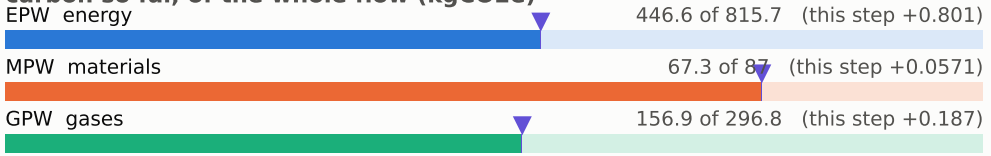

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

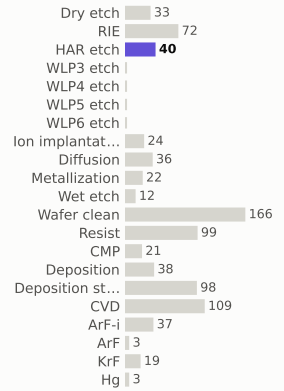

materials deposited (g)

gases emitted (g)

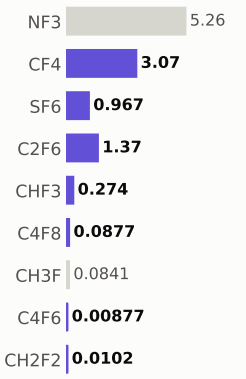

Step #16568.1633: HAR_etch

etch_noop · HAR_etch

1.04	671.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

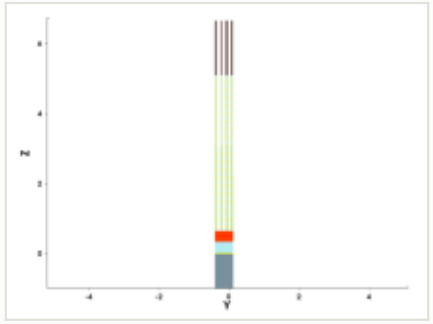

y cut at -0.150 µm

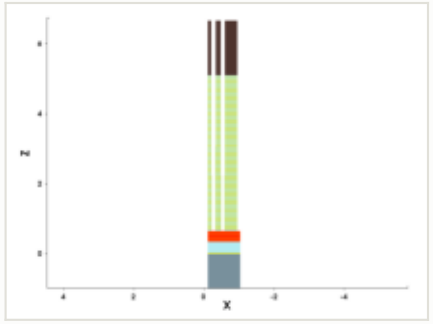

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

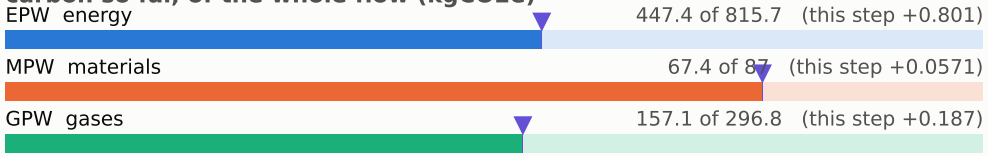

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

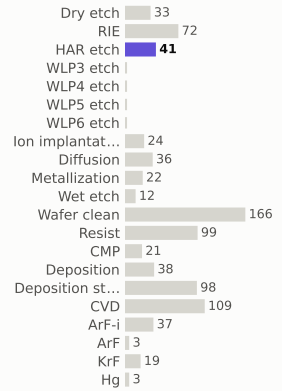

materials deposited (g)

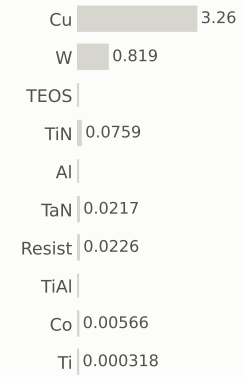

gases emitted (g)

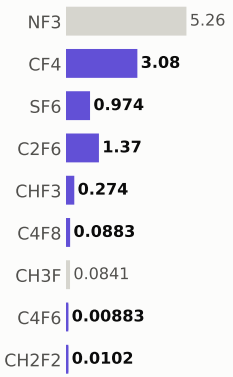

Step #16568.2653: HAR_etch

etch_noop · HAR_etch

1.04	672.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

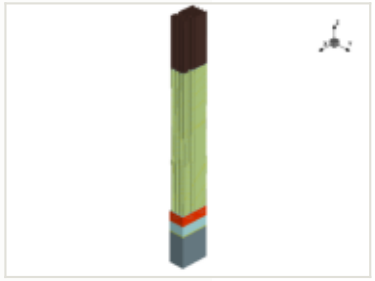

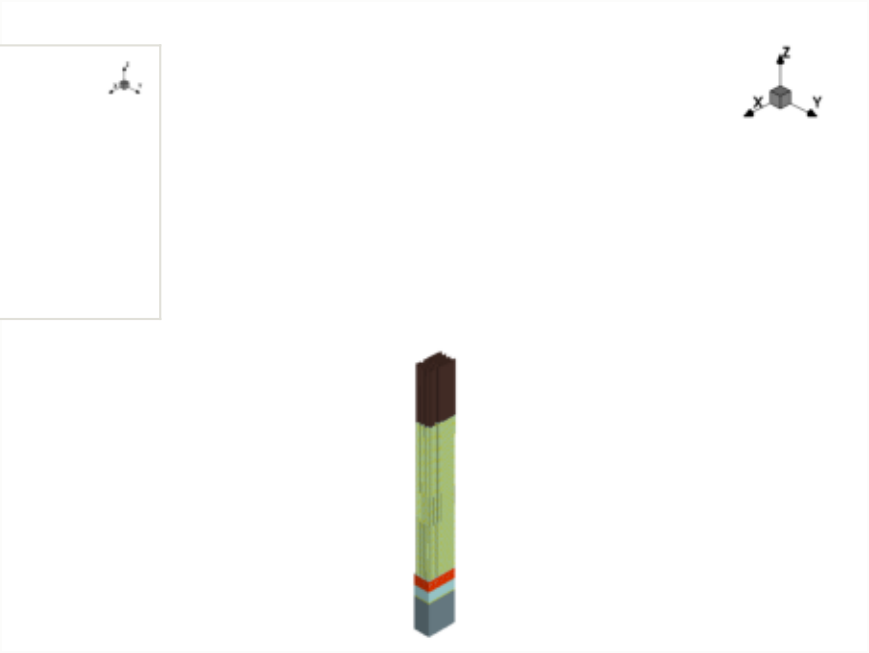

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

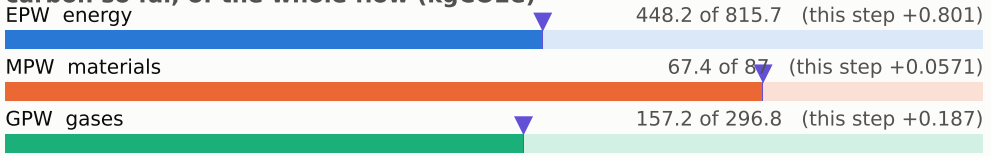

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

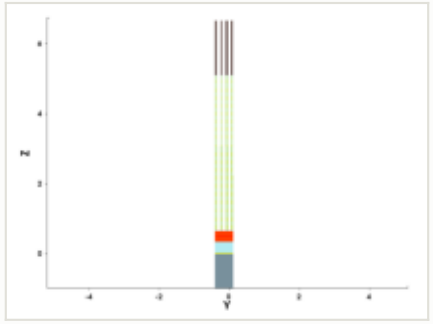

y cut at -0.150 µm

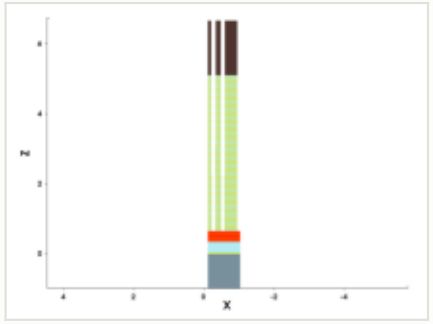

mask for this step

no mask for this step

steps by process area

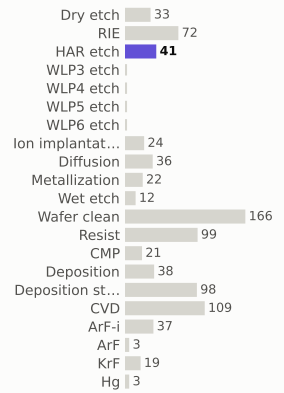

materials deposited (g)

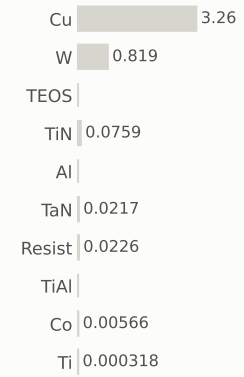

gases emitted (g)

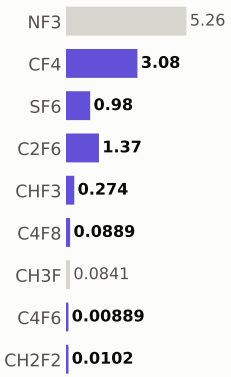

Step #16568.367299999998: HAR_etch

etch_noop · HAR_etch

1.04	674.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

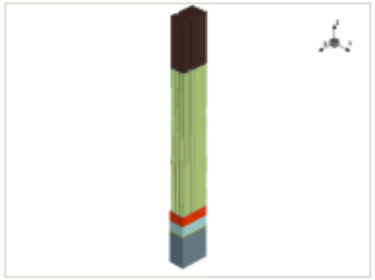

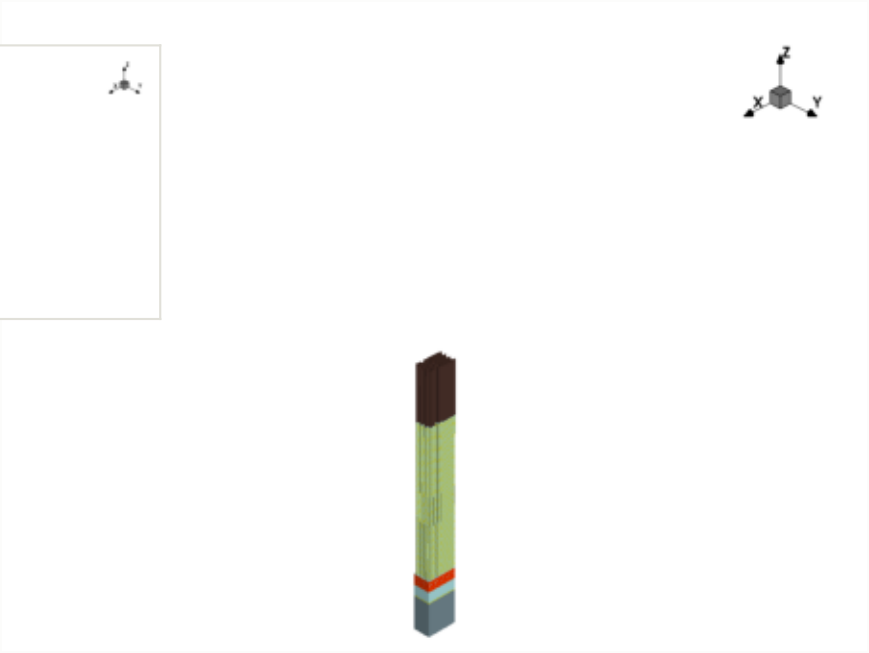

x cut at -0.570 µm

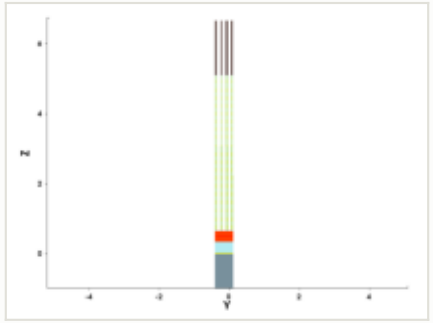

y cut at -0.150 µm

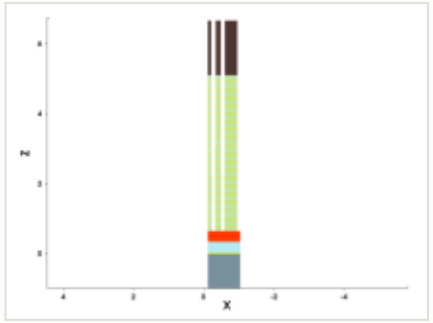

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

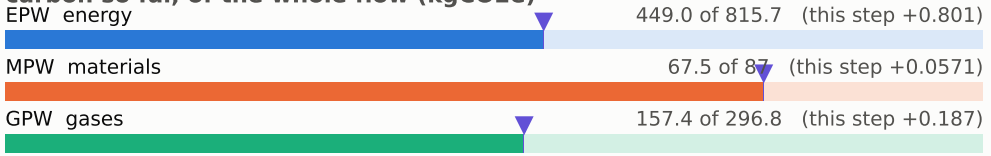

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

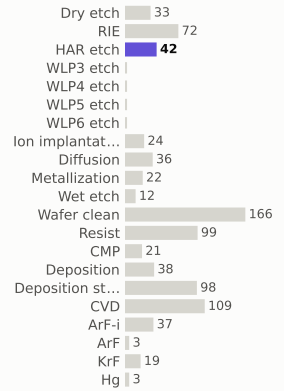

materials deposited (g)

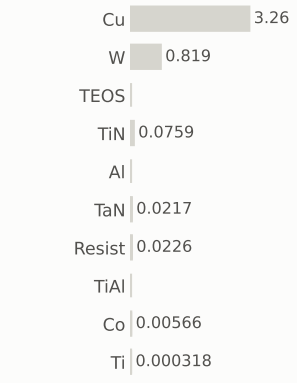

gases emitted (g)

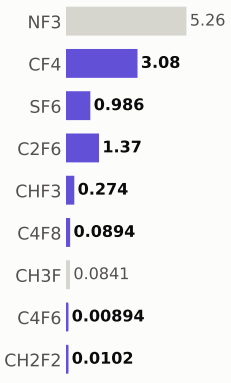

Step #16568.4694: HAR_etch

etch_noop · HAR_etch

1.04	675.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

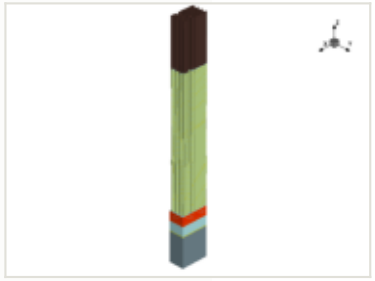

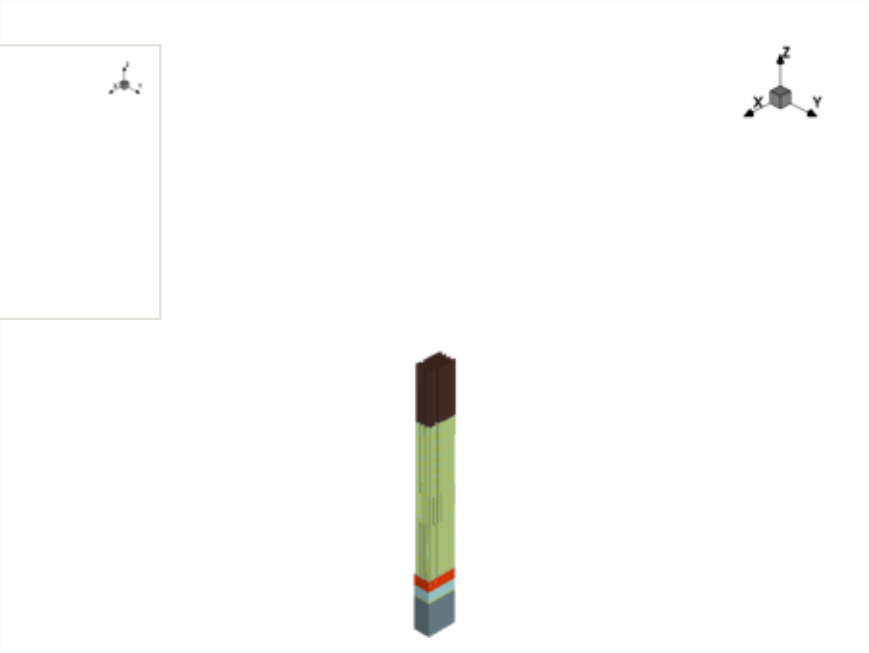

x cut at -0.570 µm

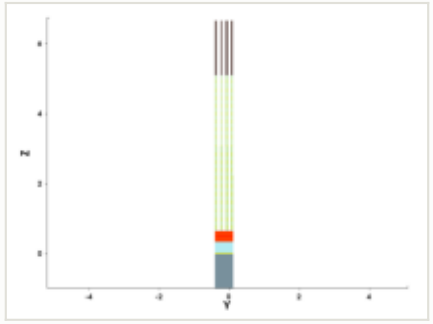

y cut at -0.150 µm

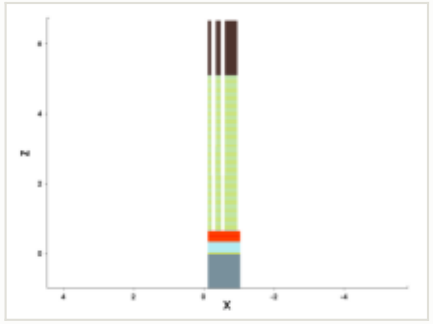

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

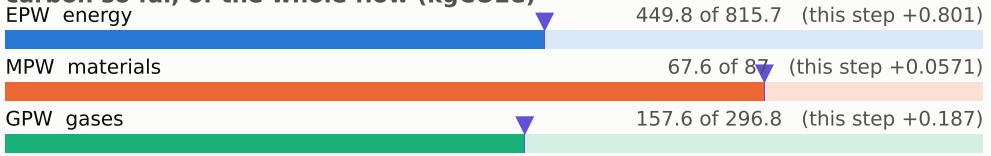

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

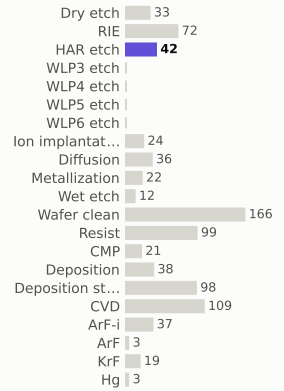

materials deposited (g)

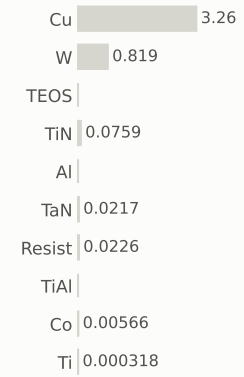

gases emitted (g)

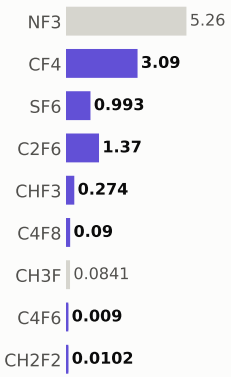

Step #16568.5714: HAR_etch

etch_noop · HAR_etch

1.04	676.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

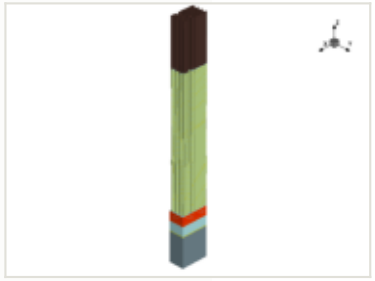

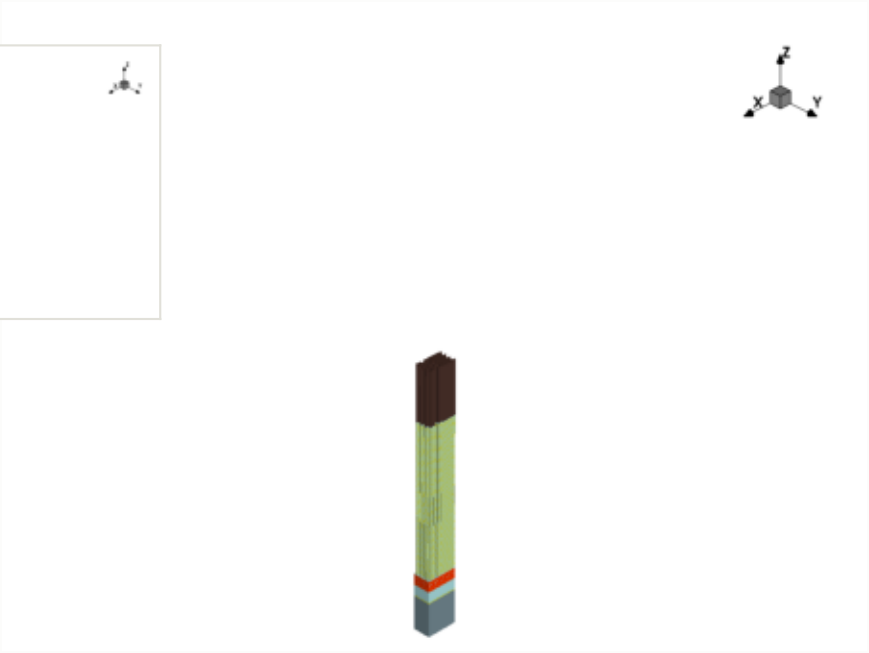

x cut at -0.570 µm

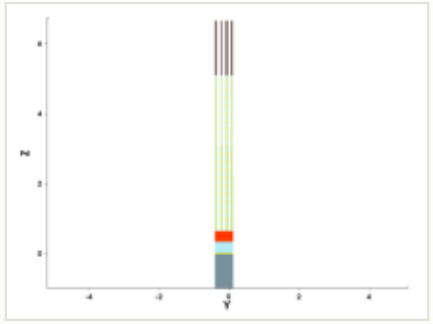

y cut at -0.150 µm

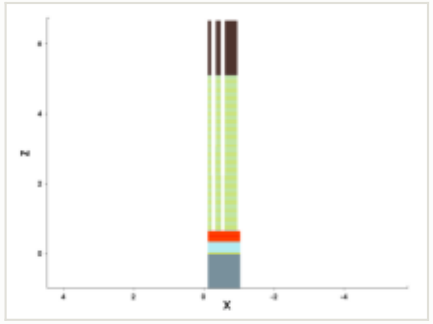

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

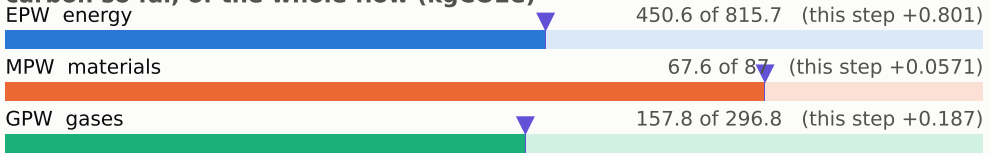

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

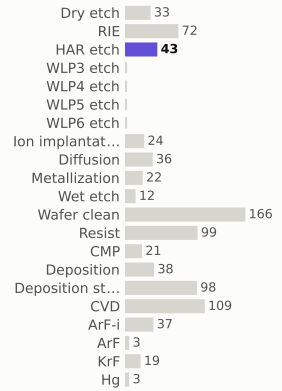

materials deposited (g)

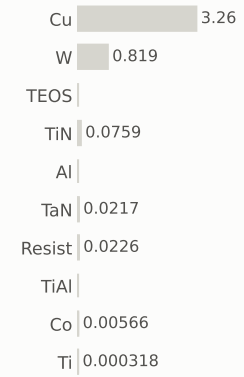

gases emitted (g)

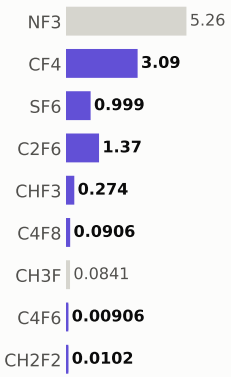

Step #16568.6735: HAR_etch

etch_noop · HAR_etch

1.04	677.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

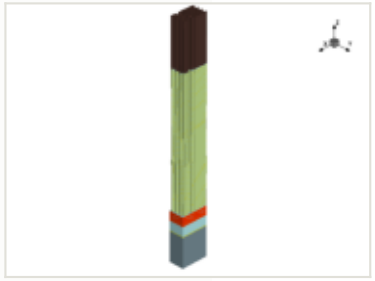

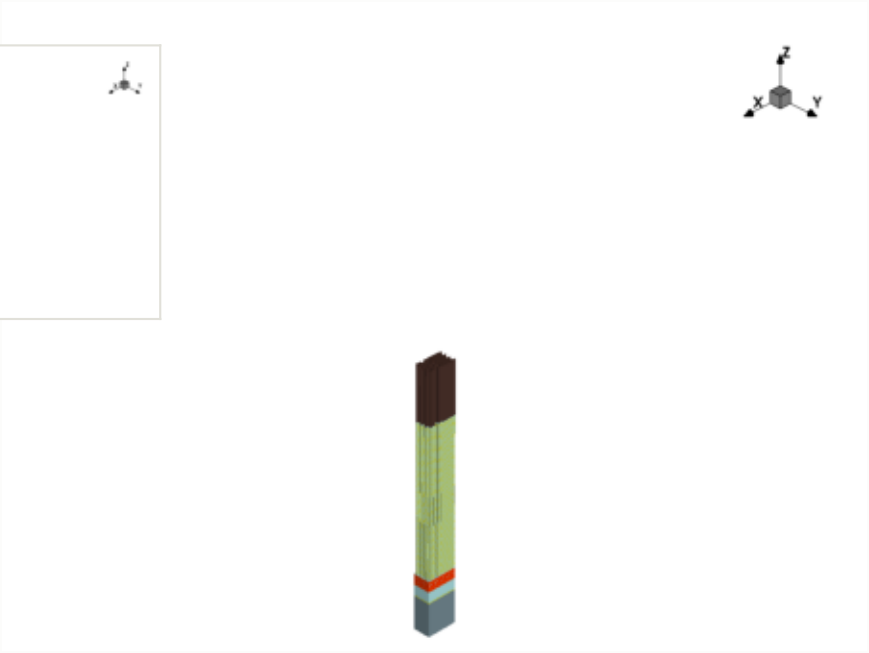

x cut at -0.570 µm

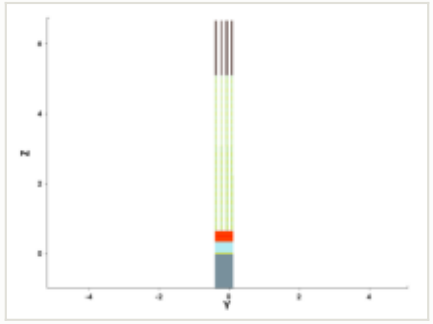

y cut at -0.150 µm

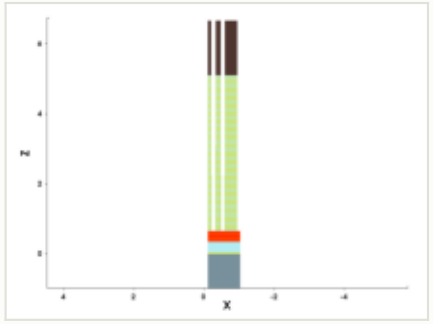

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

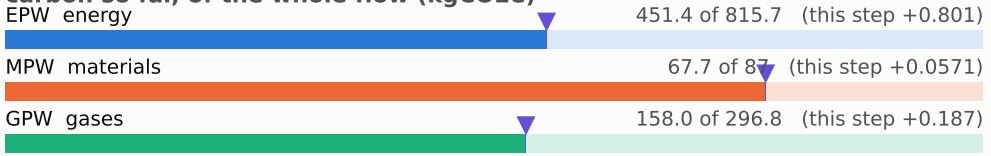

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

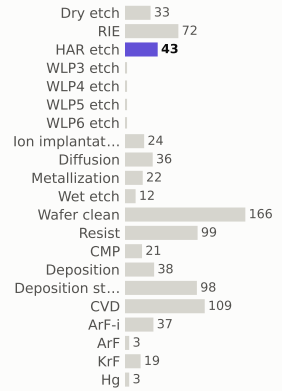

materials deposited (g)

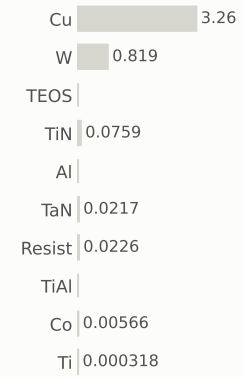

gases emitted (g)

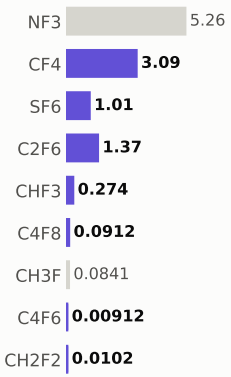

Step #16568.7755: HAR_etch

etch_noop · HAR_etch

1.04	678.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

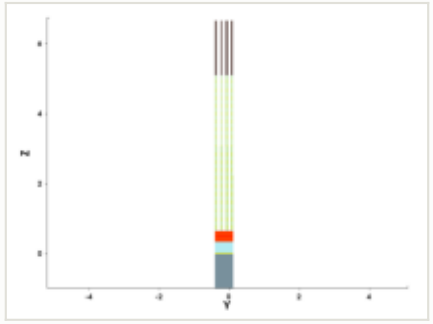

y cut at -0.150 µm

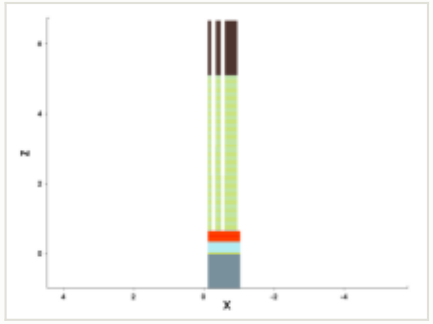

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

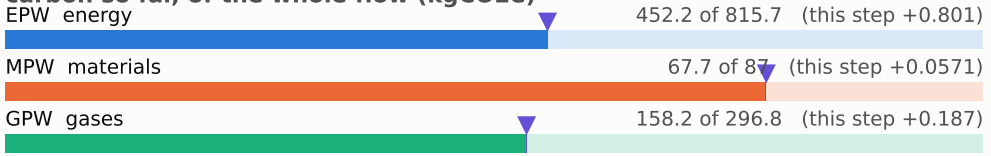

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

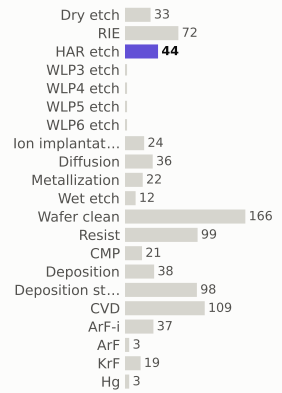

materials deposited (g)

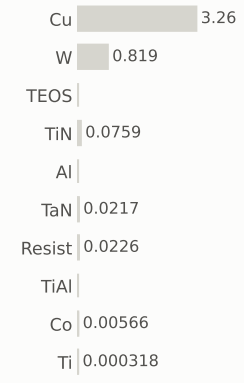

gases emitted (g)

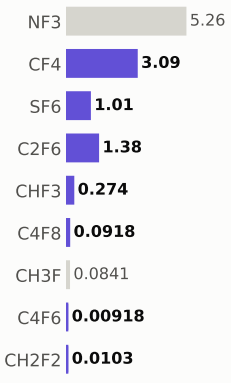

Step #16568.8776: HAR_etch

etch_noop · HAR_etch

1.04	679.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

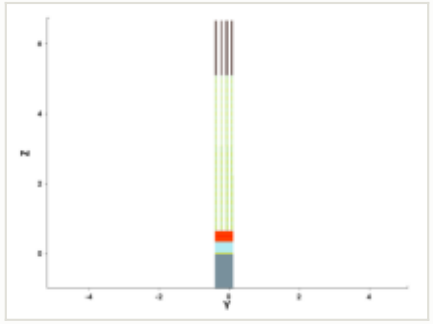

y cut at -0.150 µm

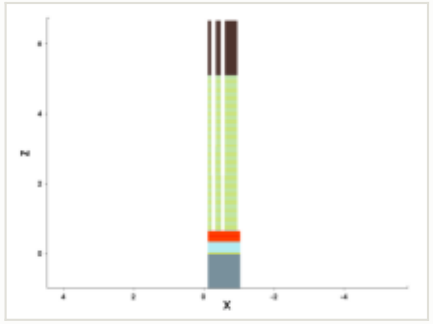

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

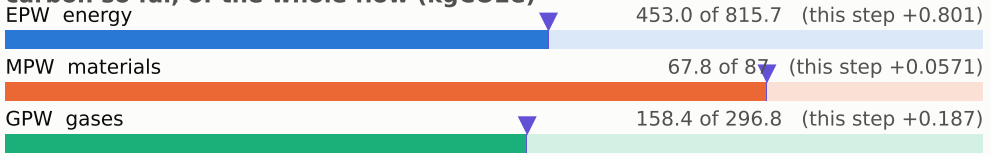

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

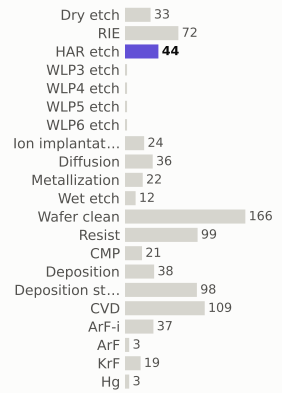

materials deposited (g)

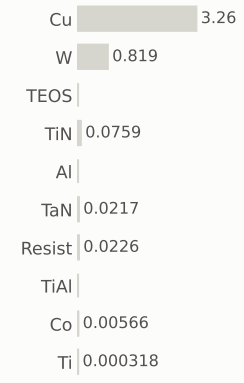

gases emitted (g)

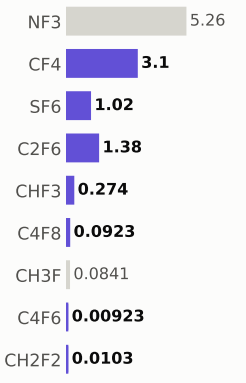

Step #16568.9796: HAR_etch

etch_noop · HAR_etch

1.04	680.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

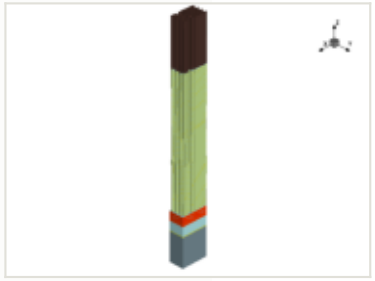

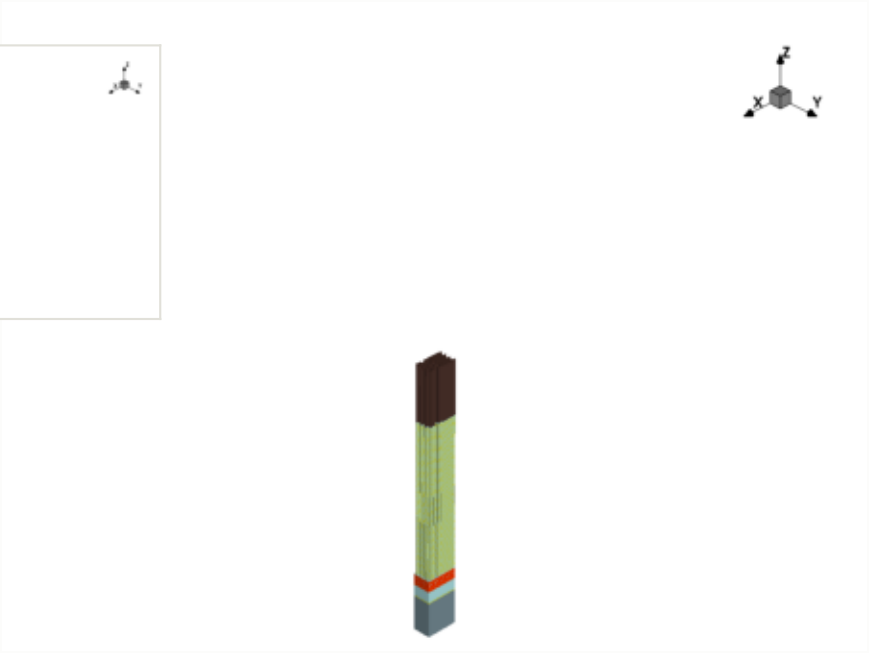

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

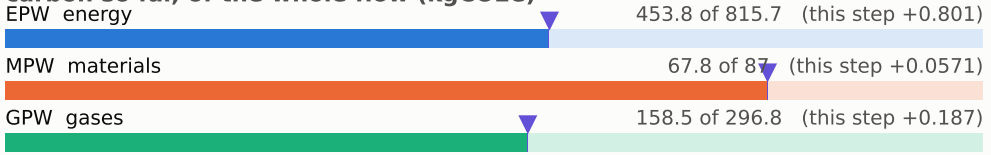

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

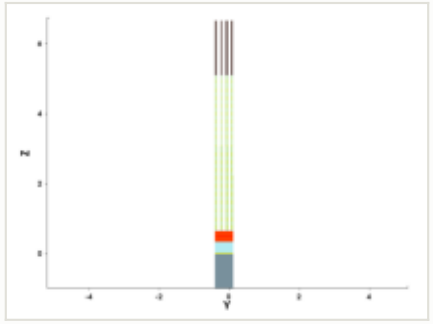

y cut at -0.150 µm

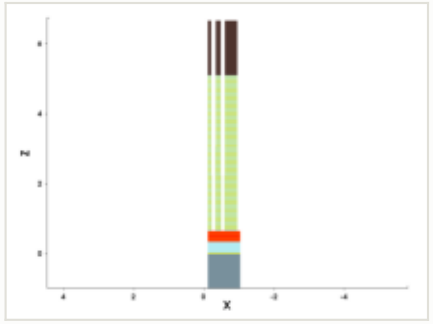

mask for this step

no mask for this step

steps by process area

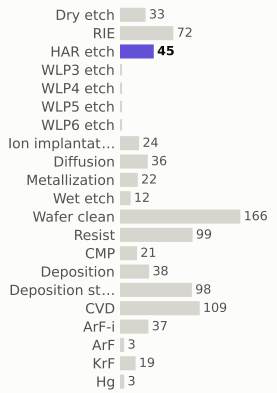

materials deposited (g)

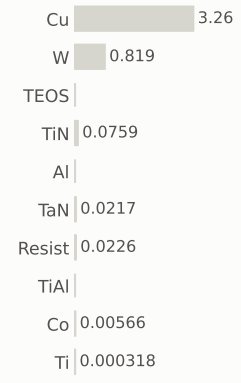

gases emitted (g)

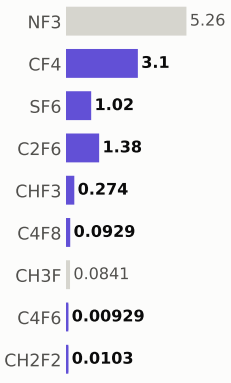

Step #16569.0816: HAR_etch

etch_noop · HAR_etch

1.04	681.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

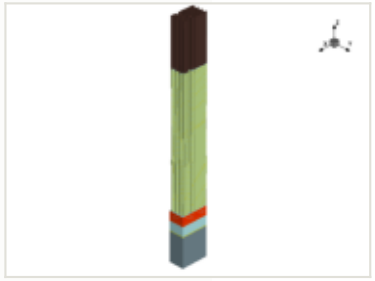

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

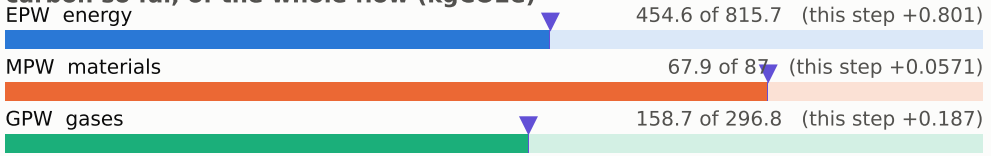

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

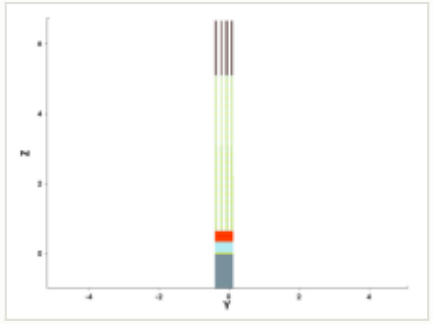

y cut at -0.150 µm

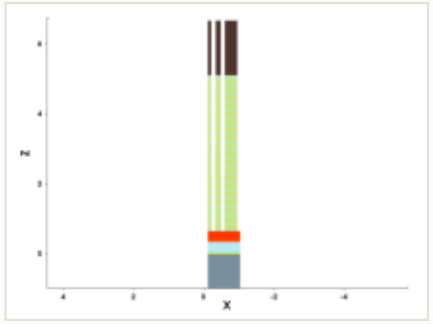

mask for this step

no mask for this step

steps by process area

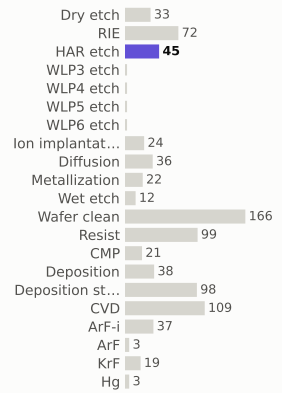

materials deposited (g)

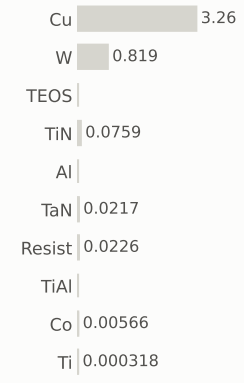

gases emitted (g)

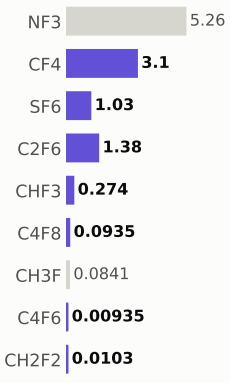

Step #16569.1837: HAR_etch

etch_noop · HAR_etch

1.04	682.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

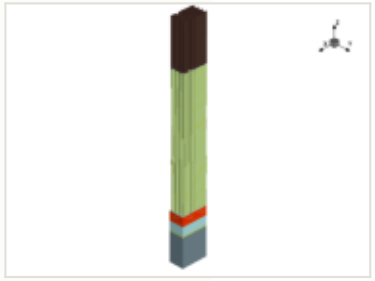

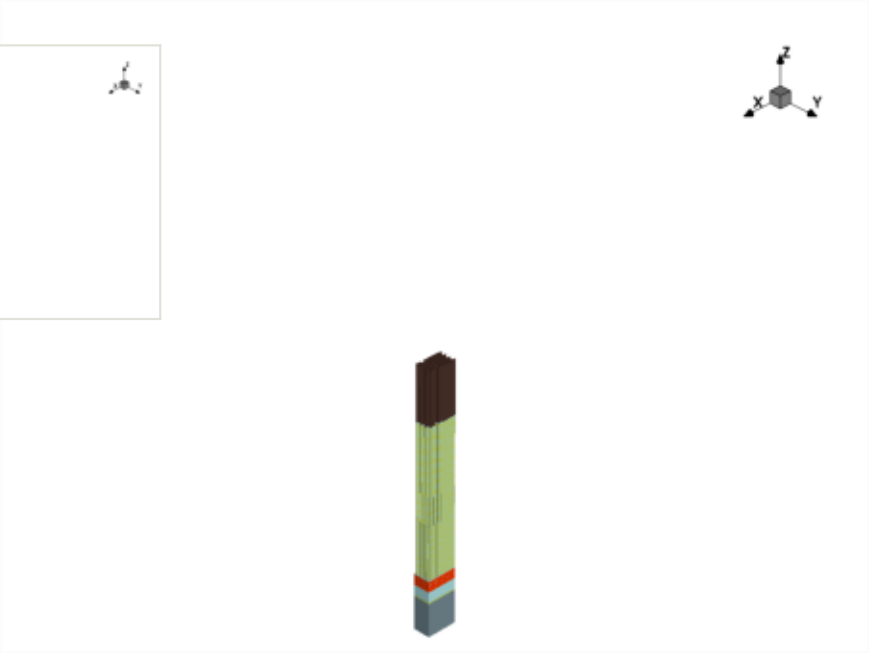

x cut at -0.570 µm

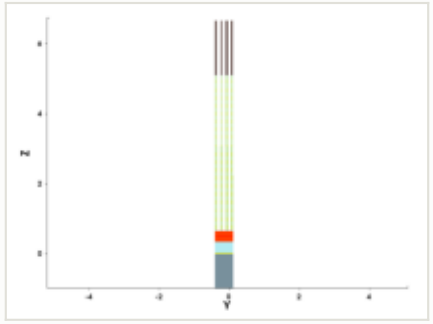

y cut at -0.150 µm

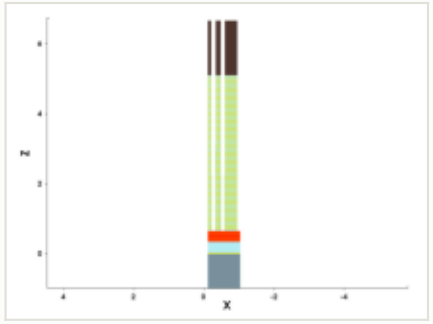

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

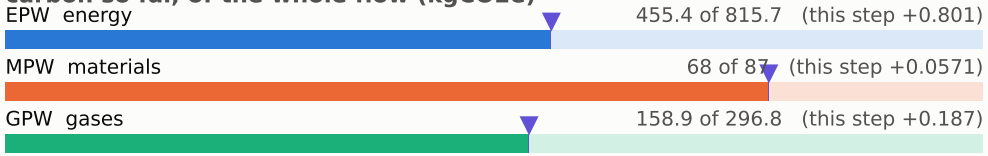

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

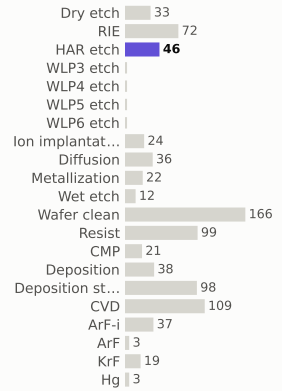

materials deposited (g)

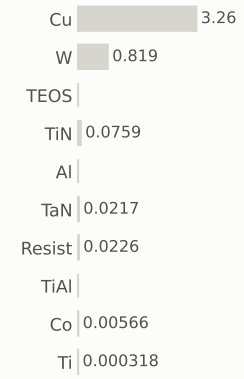

gases emitted (g)

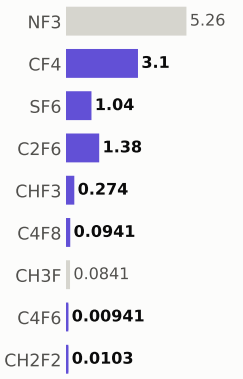

Step #16569.2857: HAR_etch

etch_noop · HAR_etch

1.04	683.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

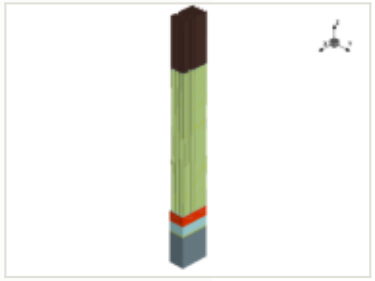

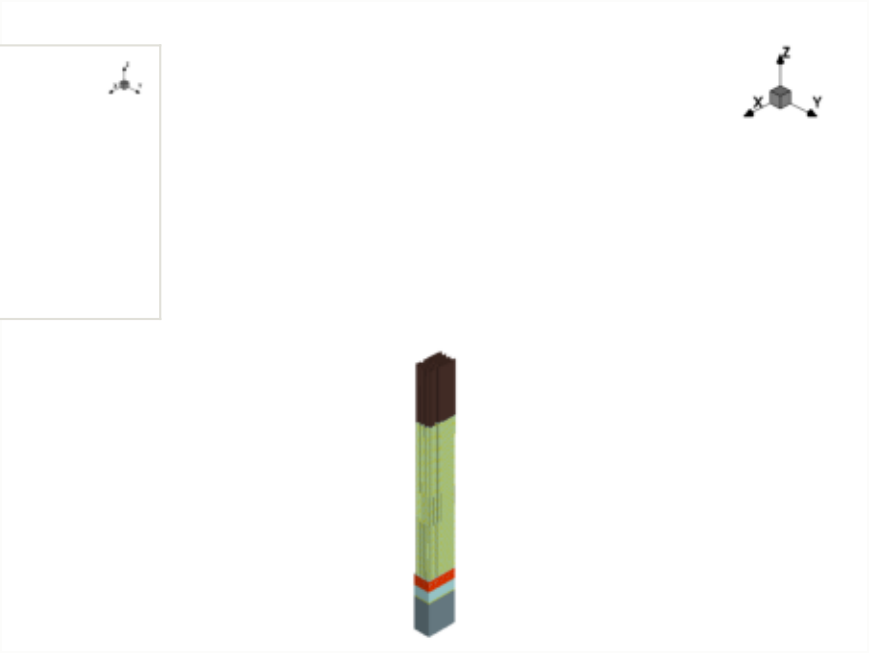

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

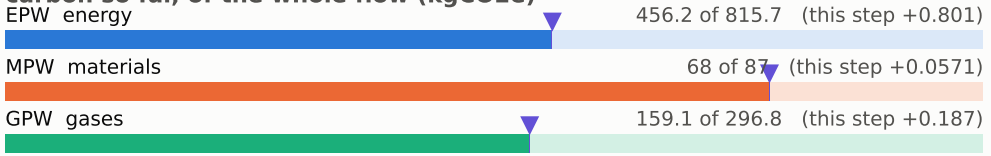

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

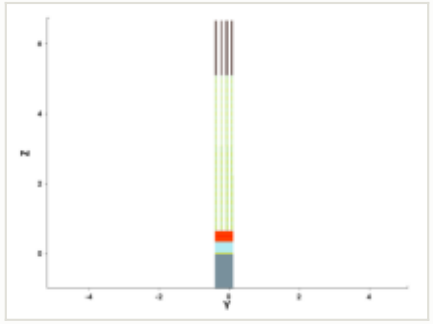

y cut at -0.150 µm

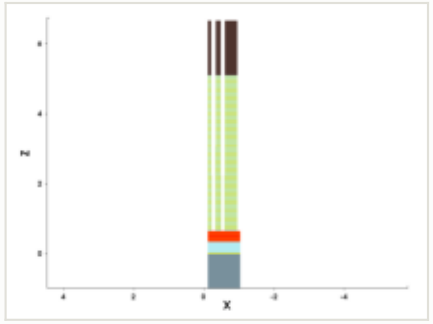

mask for this step

no mask for this step

steps by process area

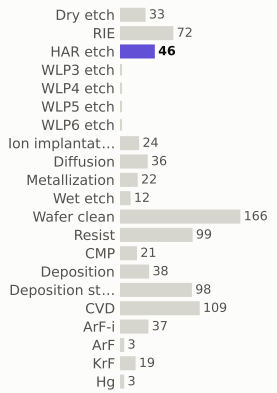

materials deposited (g)

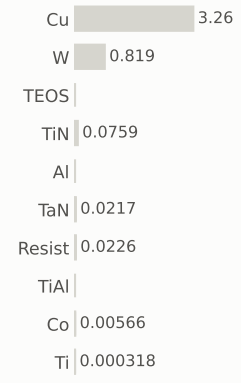

gases emitted (g)

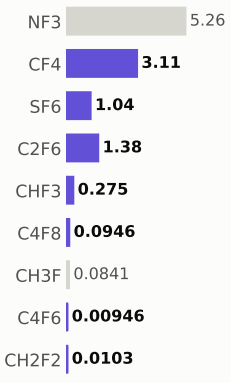

Step #16569.3878: HAR_etch

etch_noop · HAR_etch

1.04	684.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

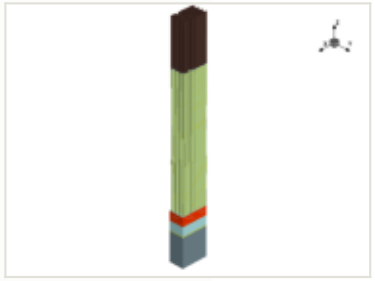

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

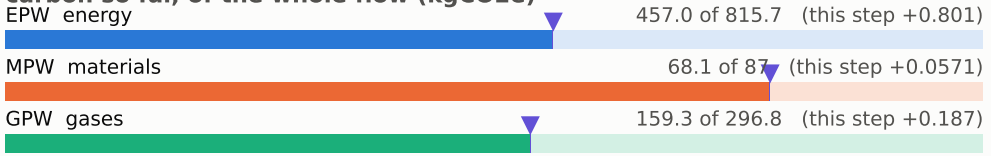

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

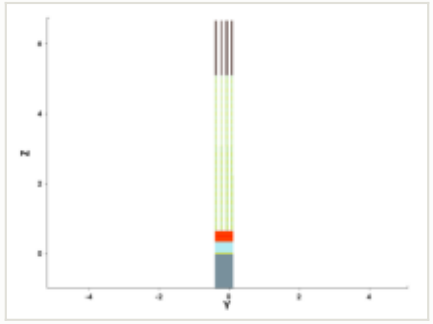

y cut at -0.150 µm

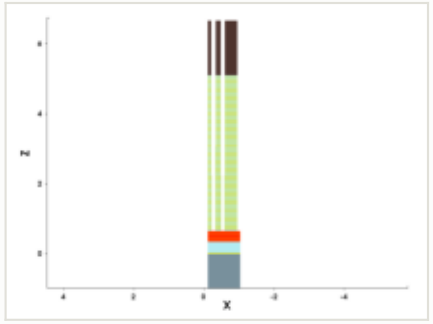

mask for this step

no mask for this step

steps by process area

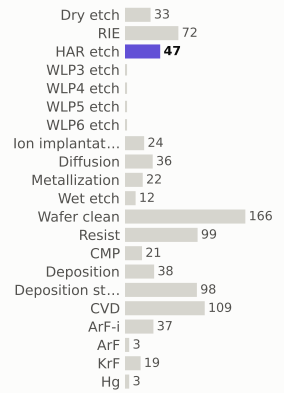

materials deposited (g)

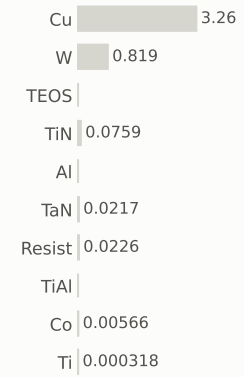

gases emitted (g)

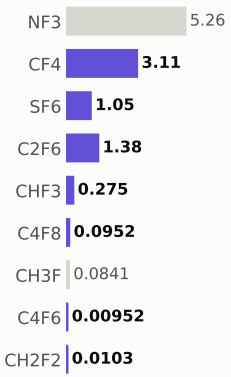

Step #16569.4898: HAR_etch

etch_noop · HAR_etch

1.04	685.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

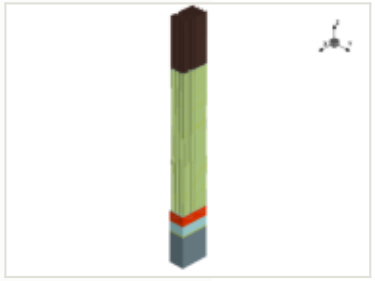

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

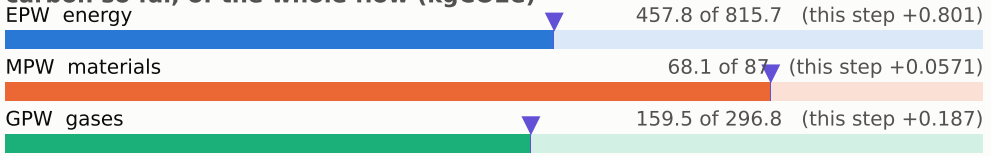

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

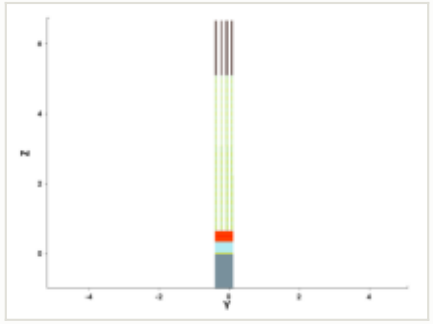

y cut at -0.150 µm

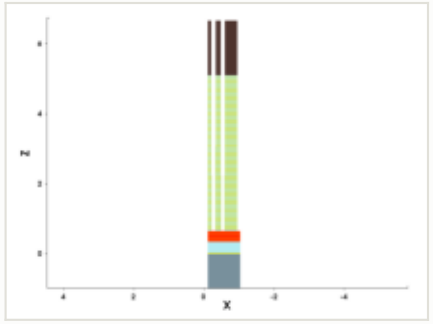

mask for this step

no mask for this step

steps by process area

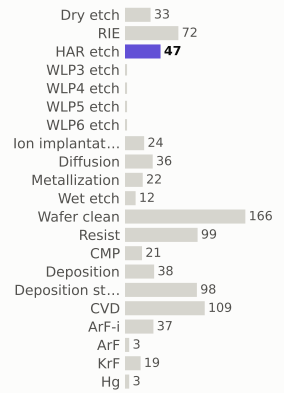

materials deposited (g)

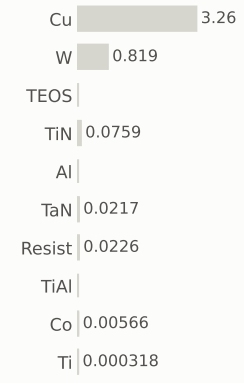

gases emitted (g)

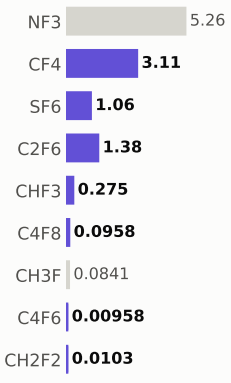

Step #16569.591800000002: HAR_etch

etch_noop · HAR_etch

1.04	686.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

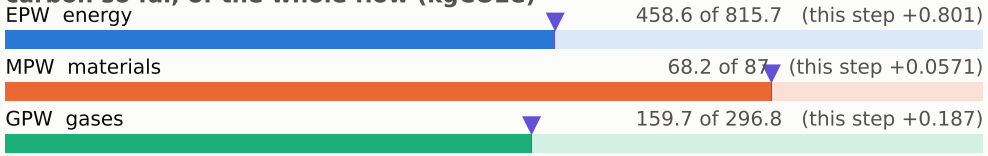

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

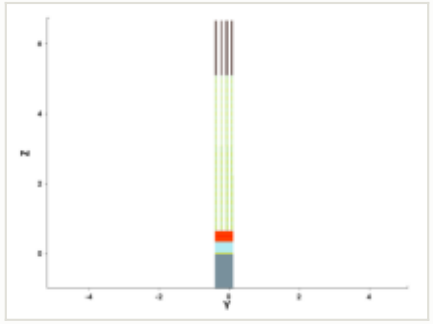

y cut at -0.150 µm

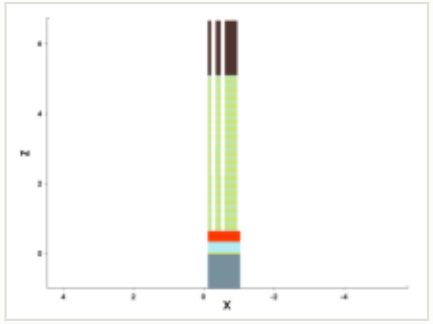

mask for this step

no mask for this step

steps by process area

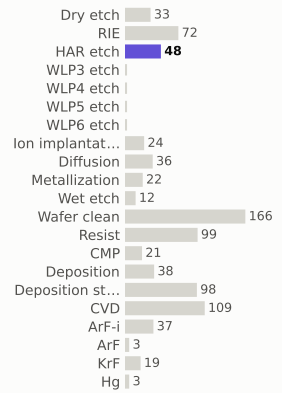

materials deposited (g)

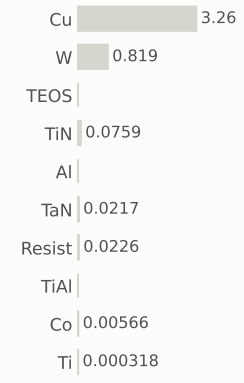

gases emitted (g)

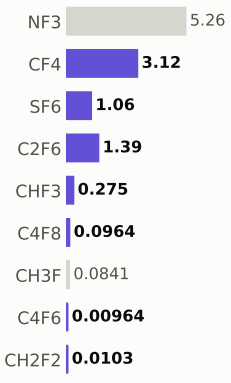

Step #16569.6939: HAR_etch

etch_noop · HAR_etch

1.04	687.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

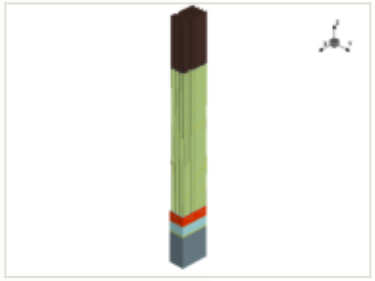

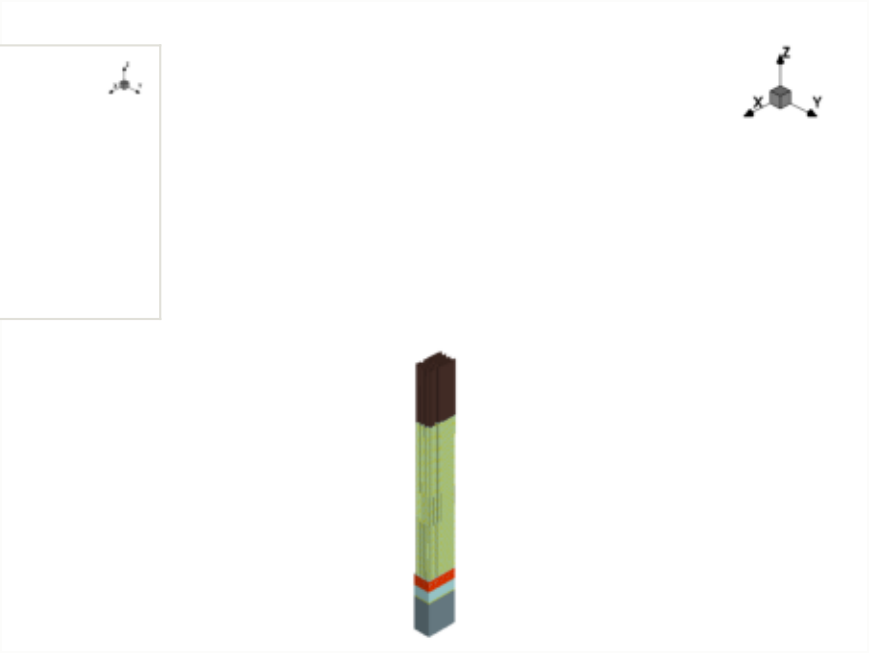

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

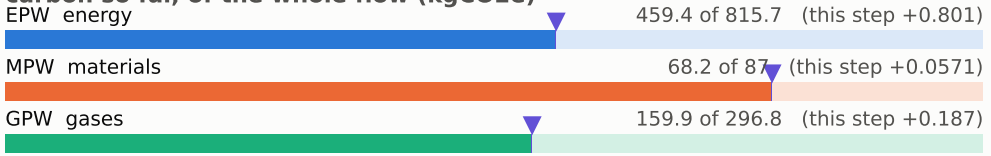

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

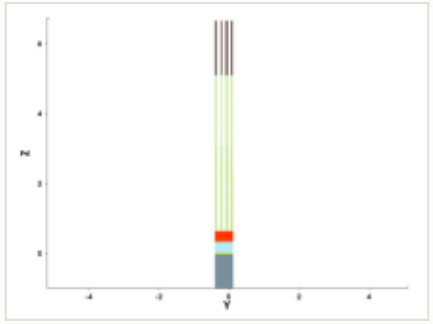

y cut at -0.150 µm

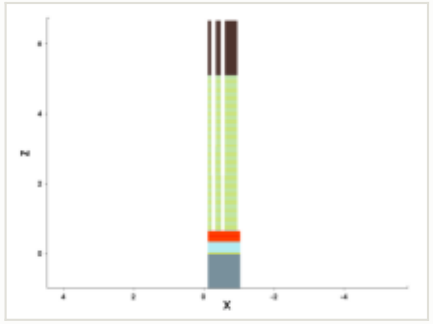

mask for this step

no mask for this step

steps by process area

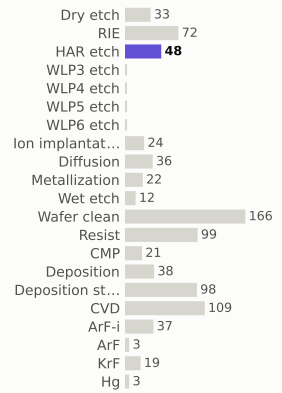

materials deposited (g)

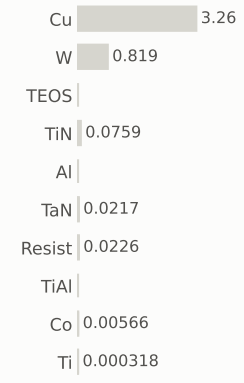

gases emitted (g)

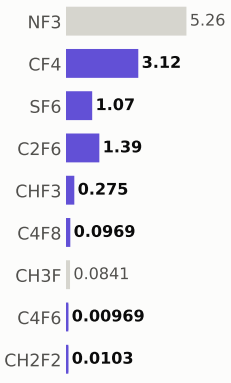

Step #16569.7959: HAR_etch

etch_noop · HAR_etch

1.04	688.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

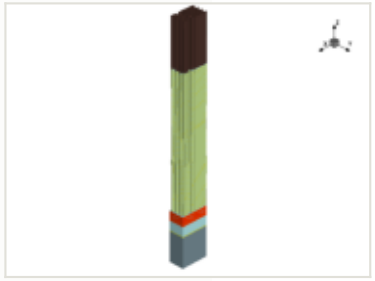

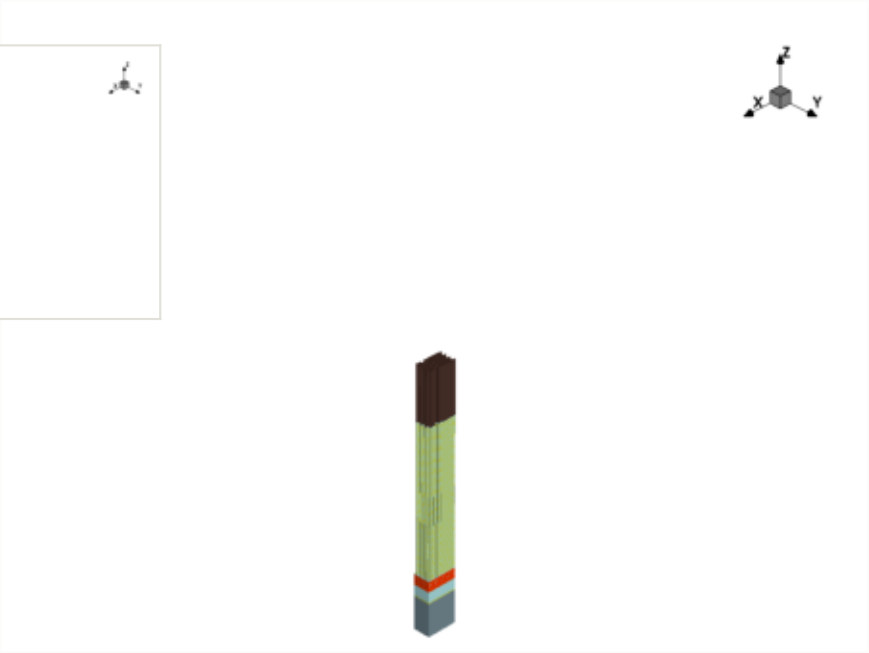

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

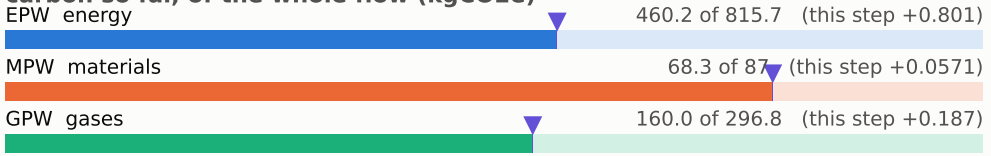

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

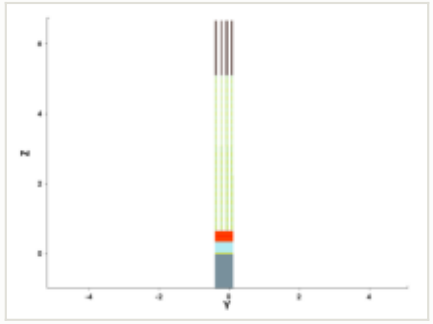

y cut at -0.150 µm

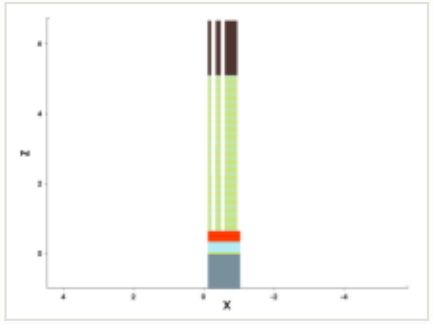

mask for this step

no mask for this step

steps by process area

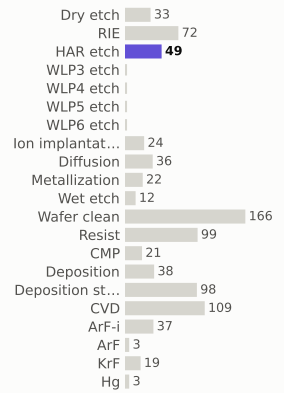

materials deposited (g)

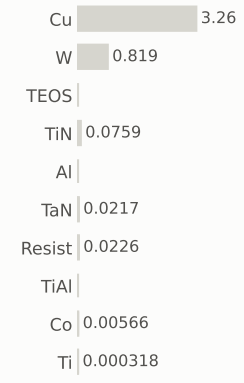

gases emitted (g)

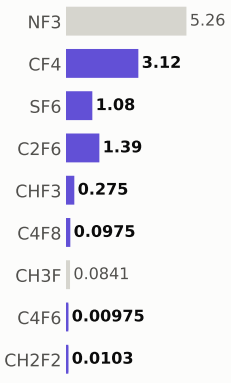

Step #16569.898: HAR_etch

etch_noop · HAR_etch

1.04	689.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

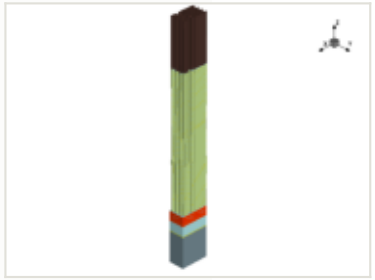

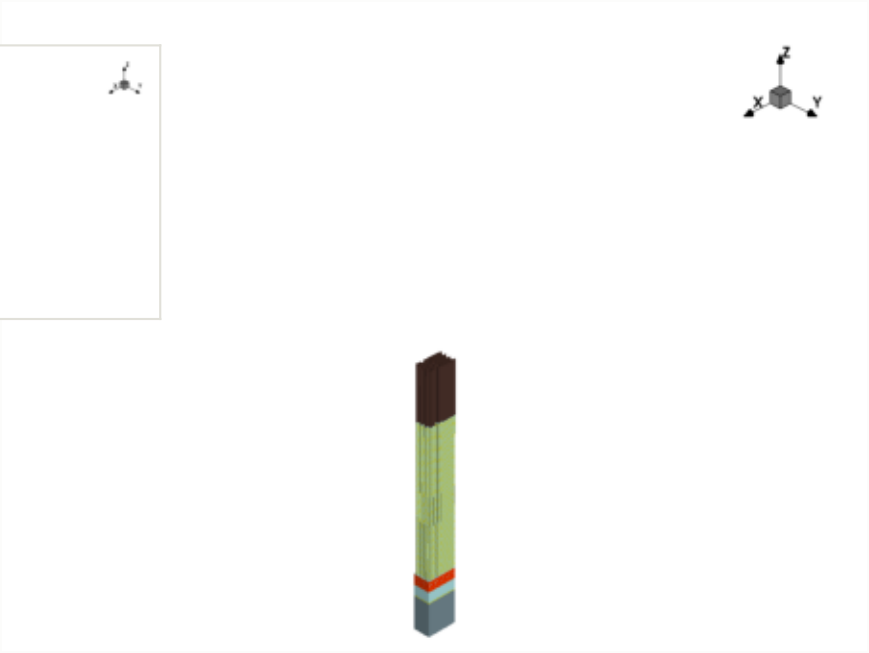

x cut at -0.570 µm

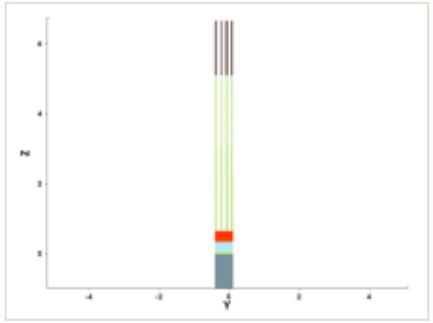

y cut at -0.150 µm

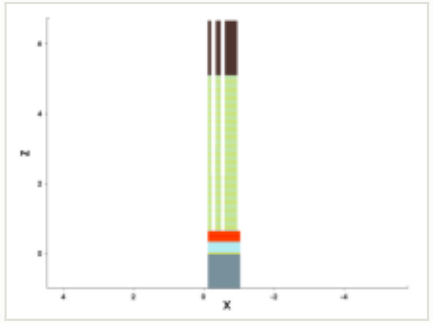

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

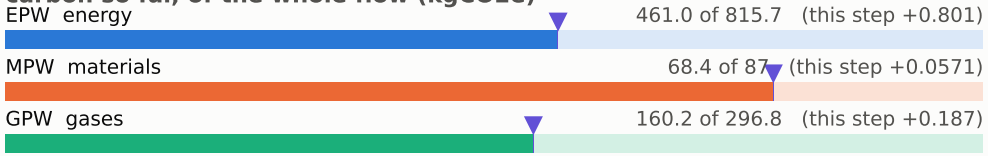

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

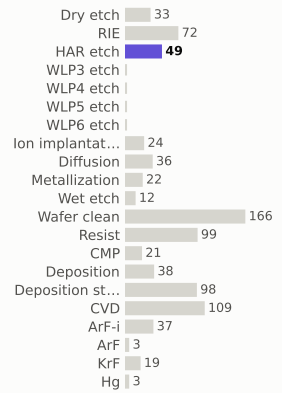

materials deposited (g)

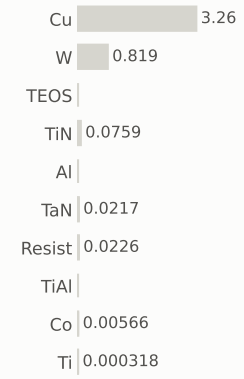

gases emitted (g)

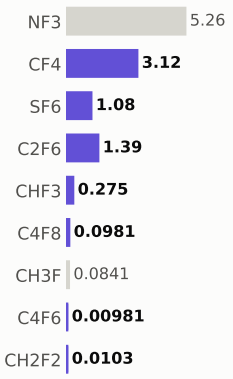

Step #16570: RIE

etch_anisotropic · RIE

1.04	690.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

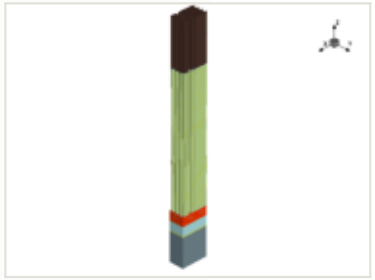

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

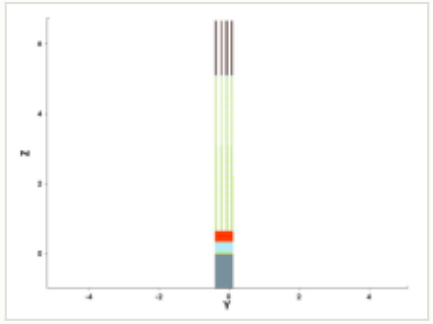

y cut at -0.150 µm

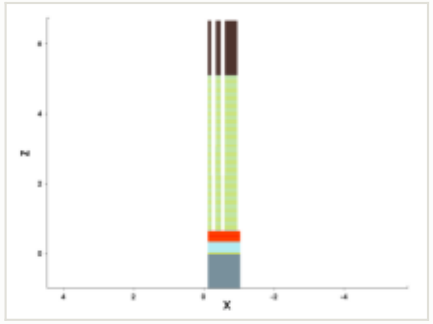

mask for this step

no mask for this step

steps by process area

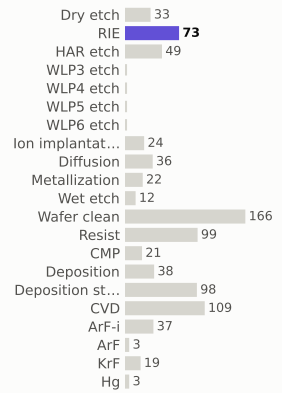

materials deposited (g)

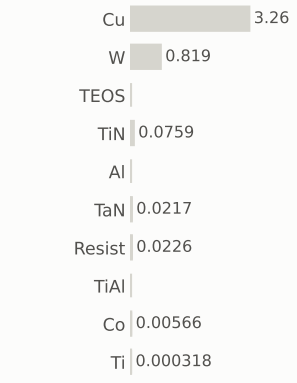

gases emitted (g)

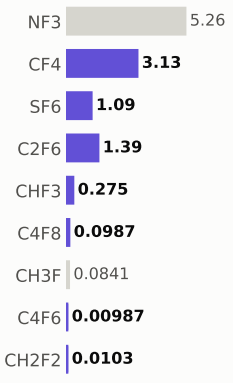

Step #16580: RIE

etch_anisotropic · RIE

1.04	691.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

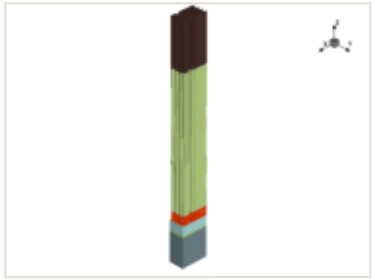

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

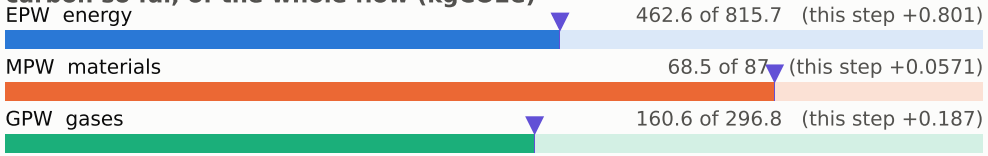

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

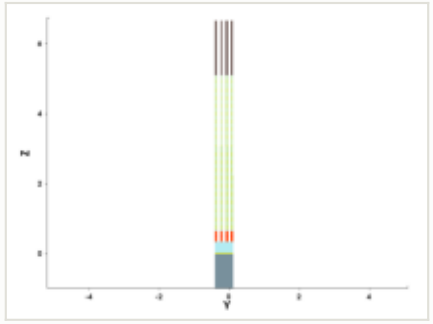

y cut at -0.150 µm

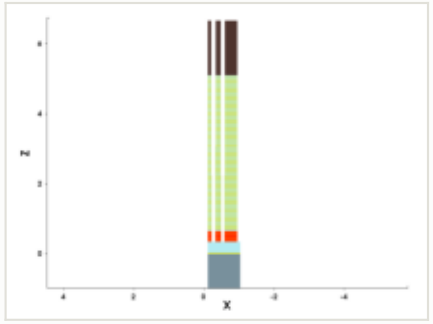

mask for this step

no mask for this step

steps by process area

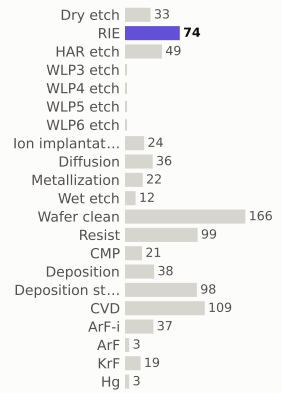

materials deposited (g)

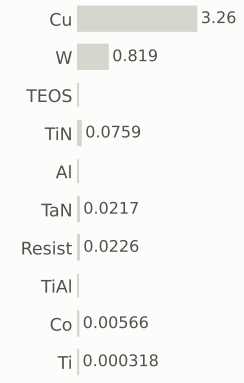

gases emitted (g)

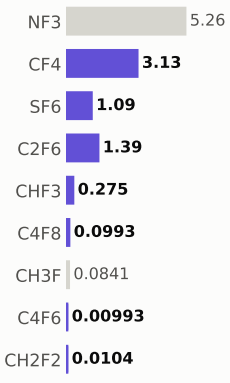

Step #16590: RIE

etch_anisotropic · RIE

1.04	692.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

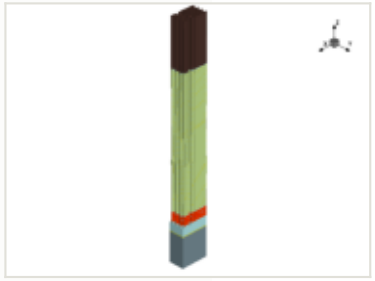

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

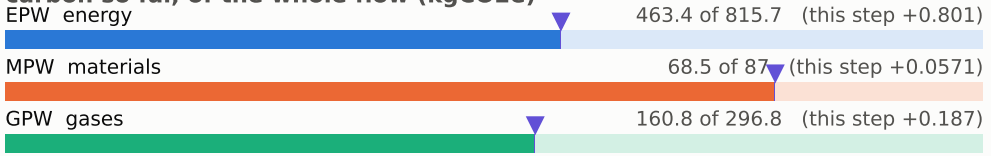

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

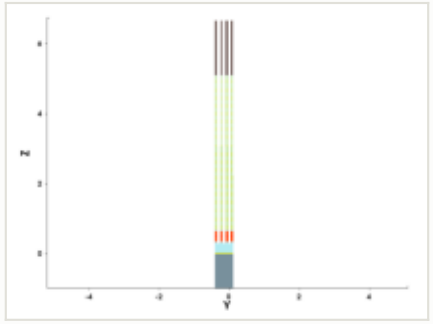

y cut at -0.150 µm

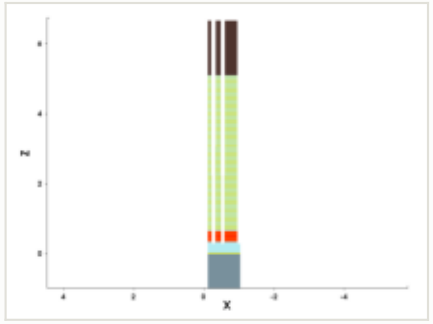

mask for this step

no mask for this step

steps by process area

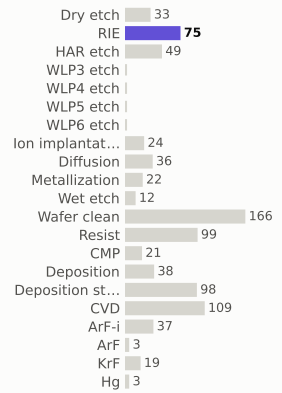

materials deposited (g)

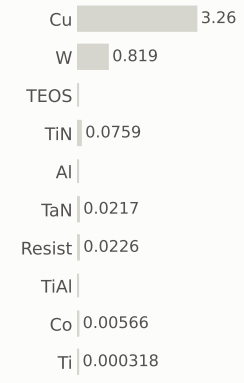

gases emitted (g)

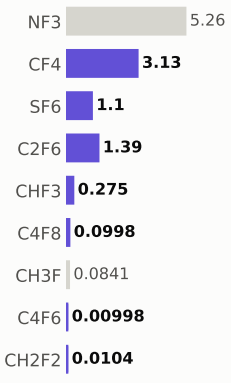

Step #16600: Dry_etch

etch_strip · Dry_etch

0.801	693.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

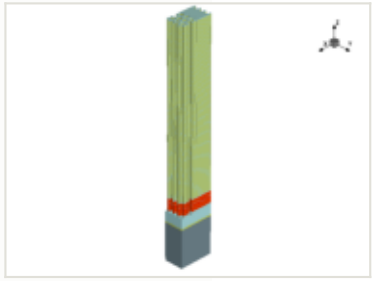

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

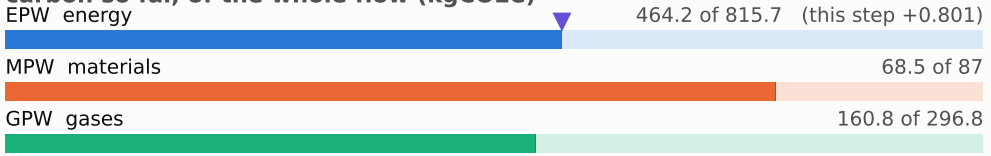

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

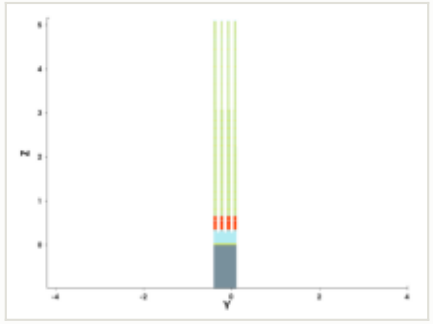

y cut at -0.150 µm

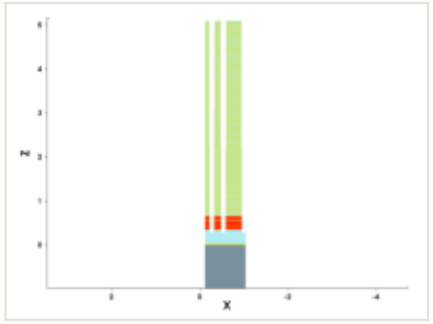

mask for this step

no mask for this step

steps by process area

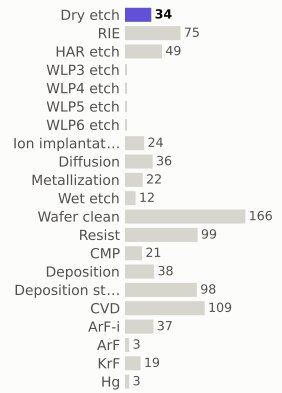

materials deposited (g)

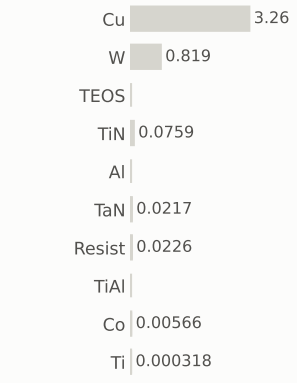

gases emitted (g)

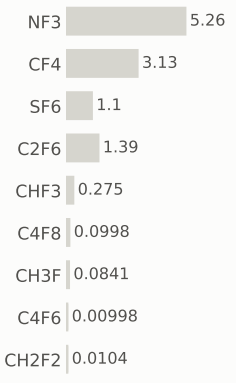

Step #16610: Wafer_clean

clean · Wafer_clean

0.169	693.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

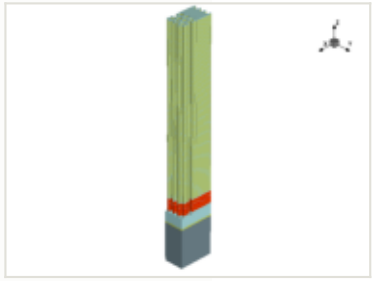

x cut at -0.570 µm

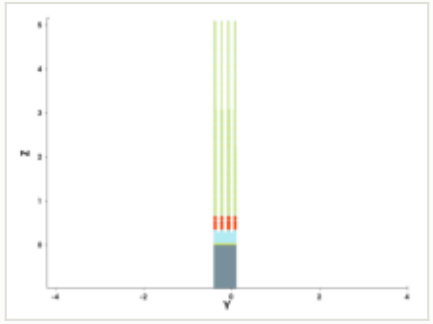

y cut at -0.150 µm

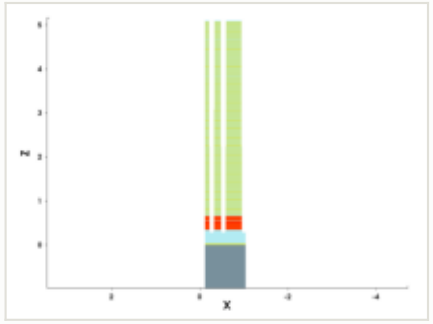

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

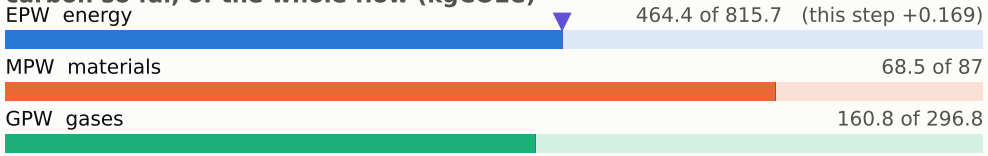

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

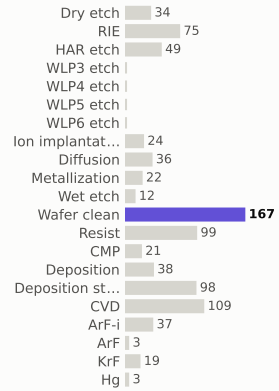

materials deposited (g)

gases emitted (g)

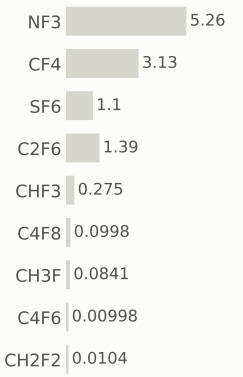

Step #16620: CVD

depo_isotropic · CVD

1.31	695.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

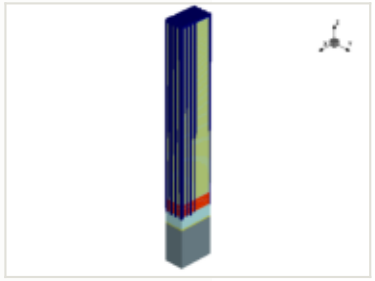

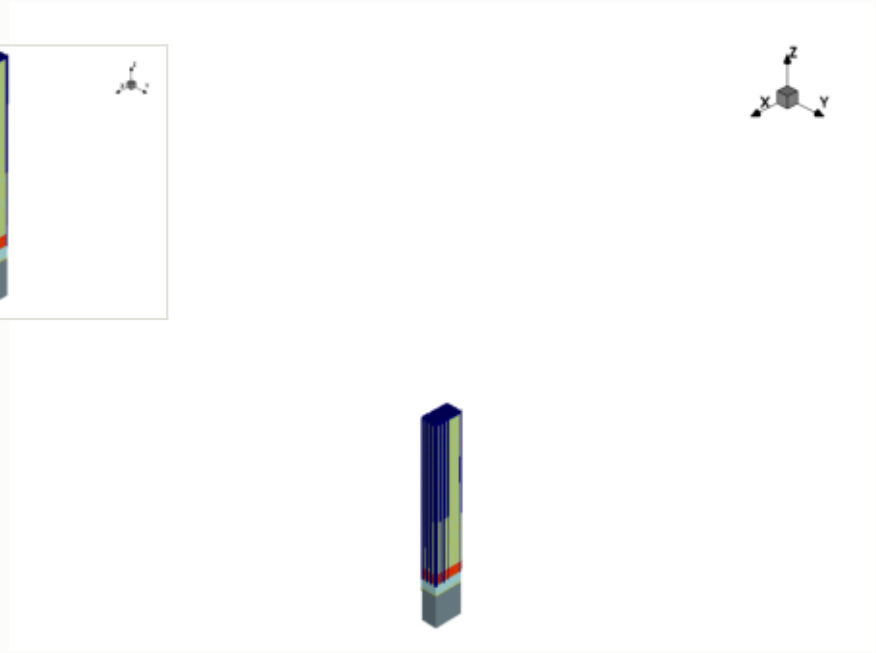

x cut at -0.570 µm

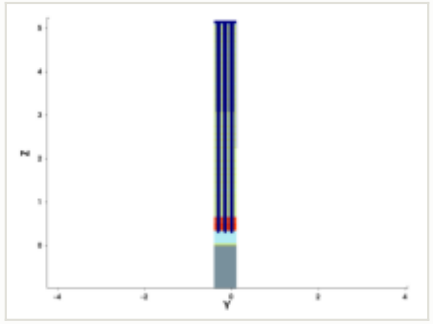

y cut at -0.150 µm

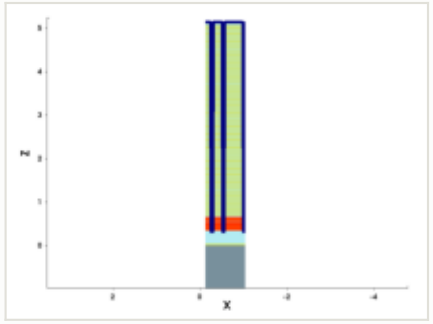

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.07 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0329 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

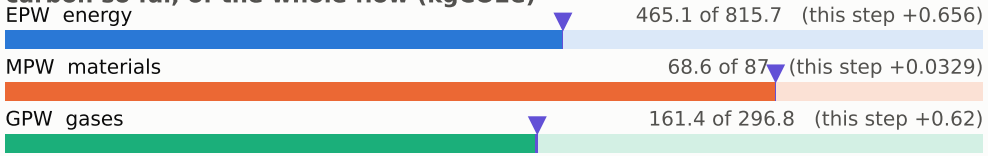

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

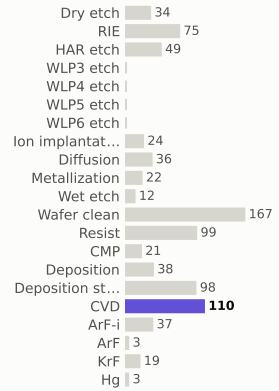

materials deposited (g)

gases emitted (g)

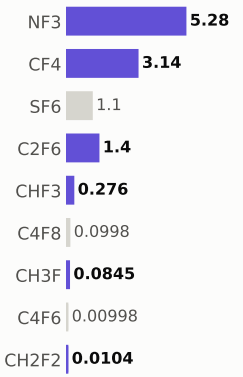

Step #16630: CMP

etch_cmp · CMP

0.169	695.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

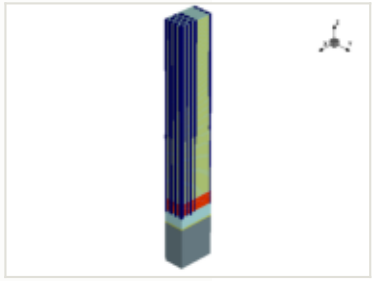



this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

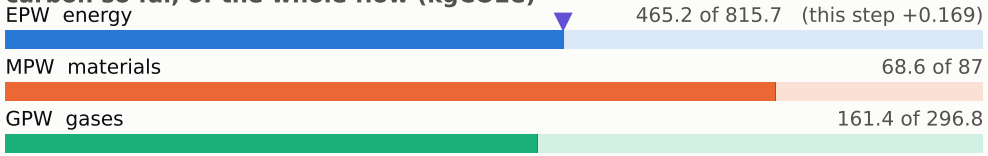

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

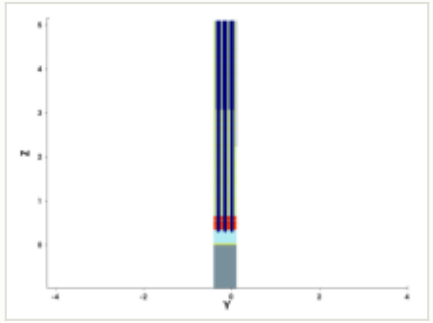

y cut at -0.150 µm

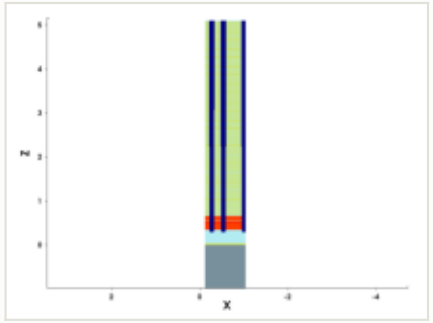

mask for this step

no mask for this step

steps by process area

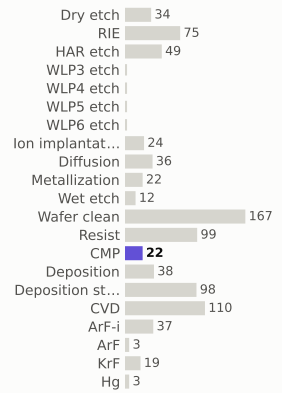

materials deposited (g)



gases emitted (g)

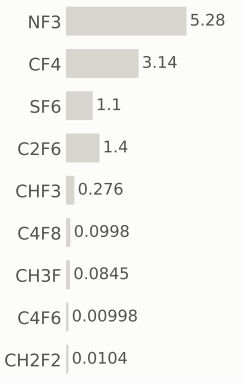

Step #16640: Wafer_clean

clean · Wafer_clean

0.169	695.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

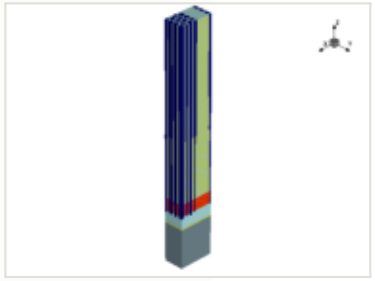



x cut at -0.570 µm

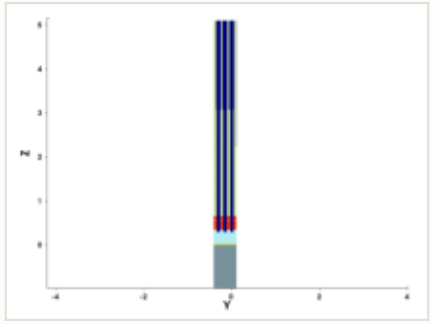

y cut at -0.150 µm

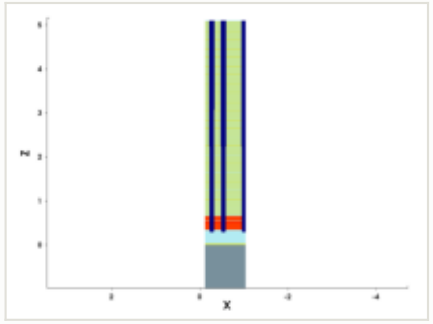

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

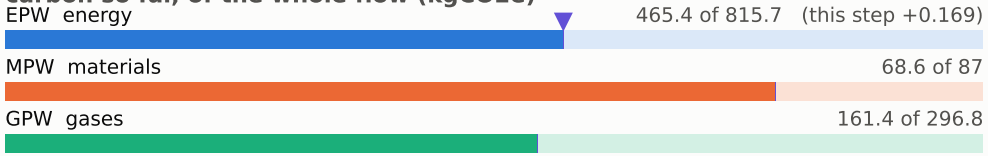

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

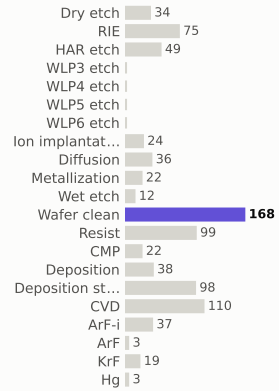

materials deposited (g)

gases emitted (g)

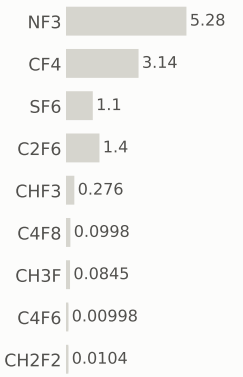

Step #16650: Wafer_clean

clean · Wafer_clean

0.169	695.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

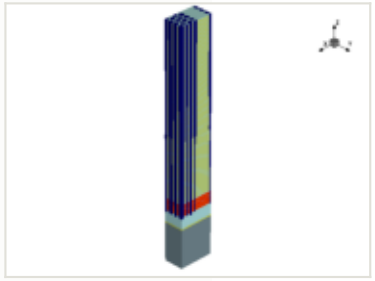



x cut at -0.570 µm

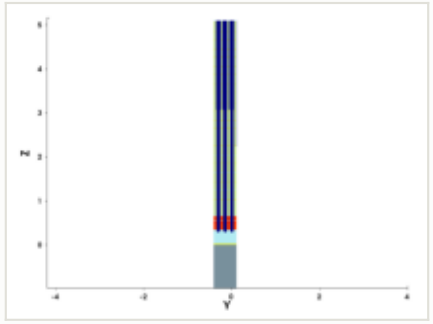

y cut at -0.150 µm

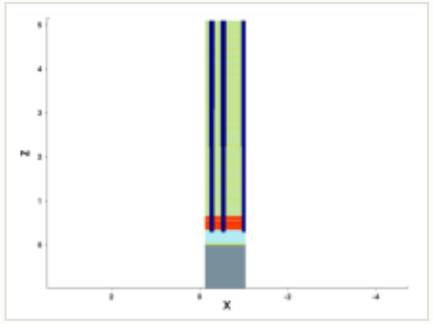

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

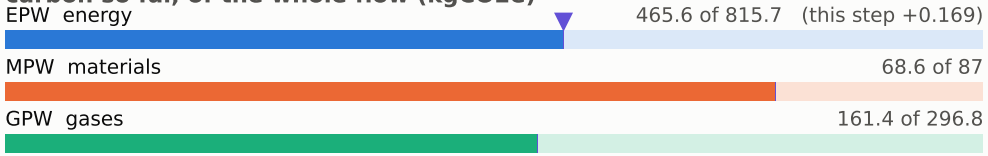

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

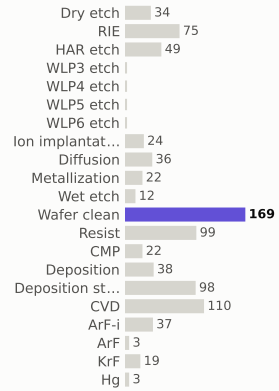

materials deposited (g)

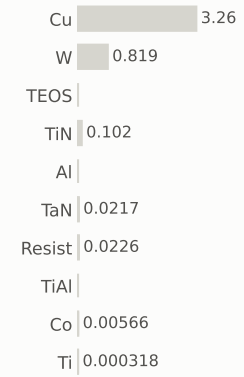

gases emitted (g)

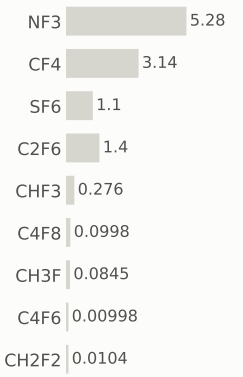

Step #16660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	696.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

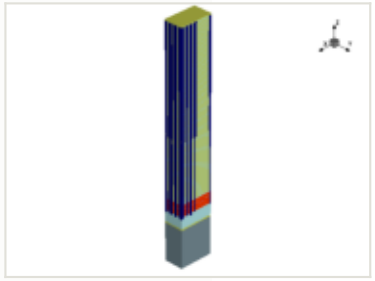

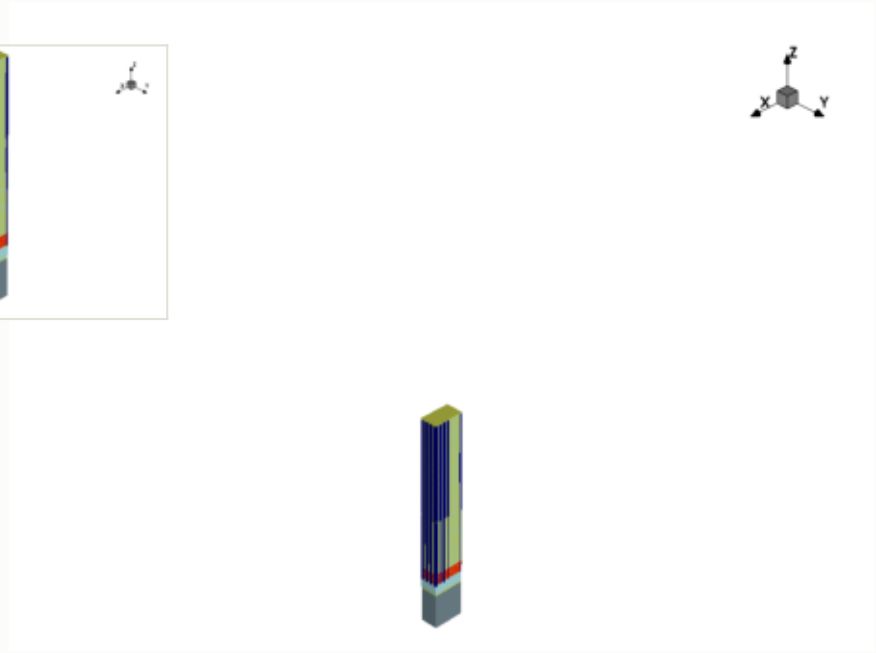

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

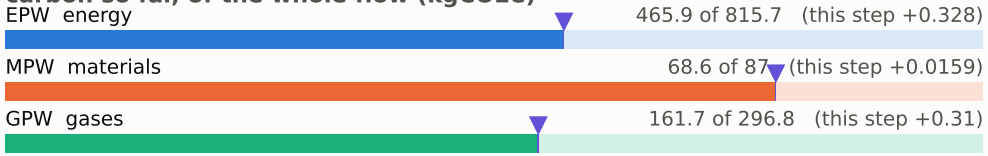

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

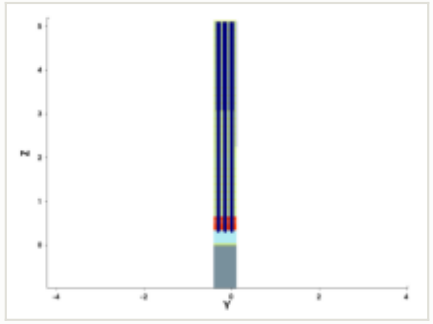

y cut at -0.150 µm

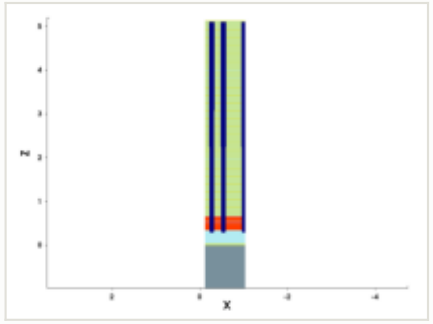

mask for this step

no mask for this step

steps by process area

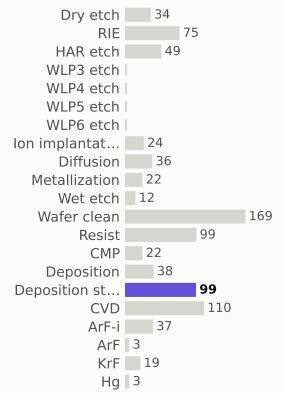

materials deposited (g)

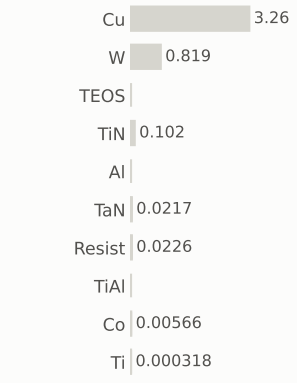

gases emitted (g)

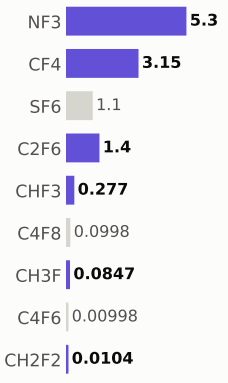

Step #16670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	696.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

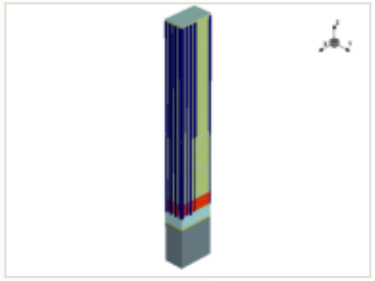

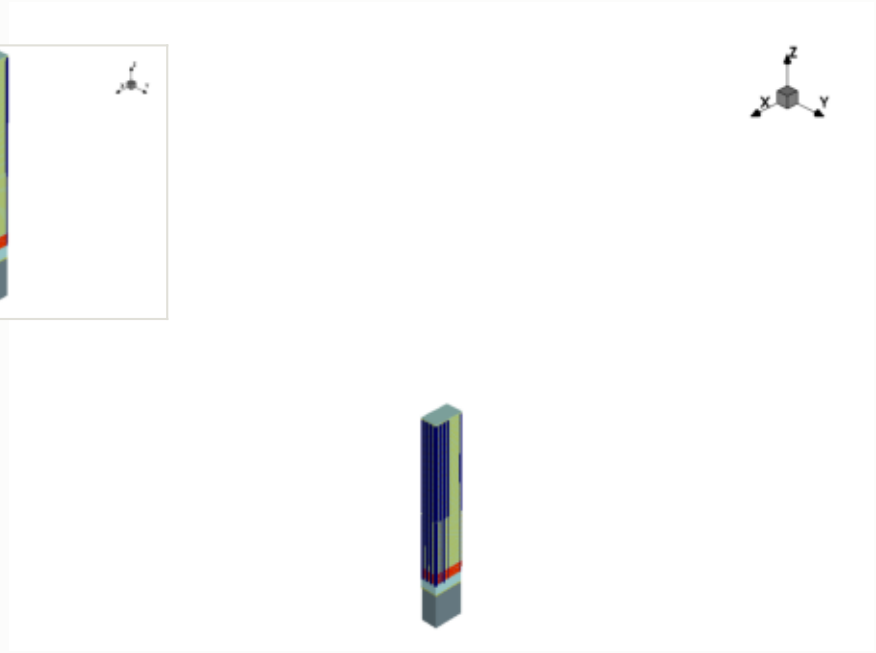

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

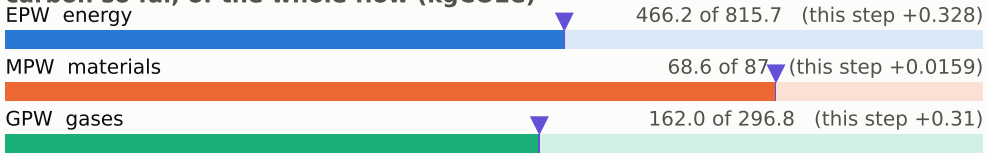

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

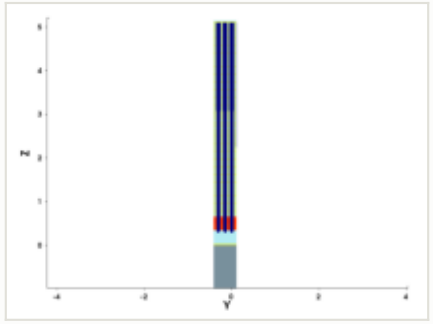

y cut at -0.150 µm

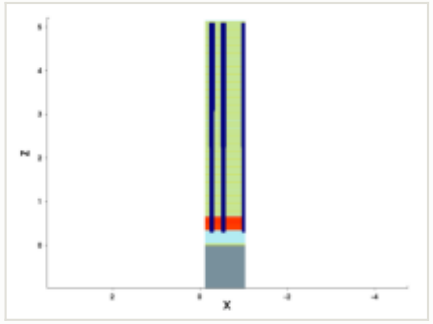

mask for this step

no mask for this step

steps by process area

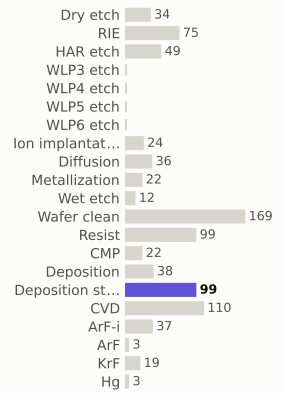

materials deposited (g)

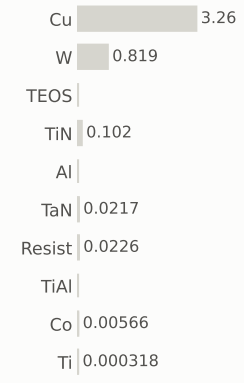

gases emitted (g)

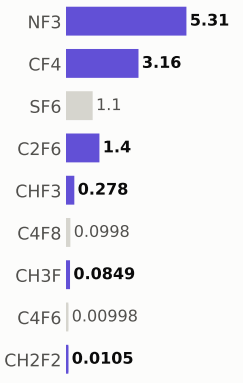

Step #16680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	697.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

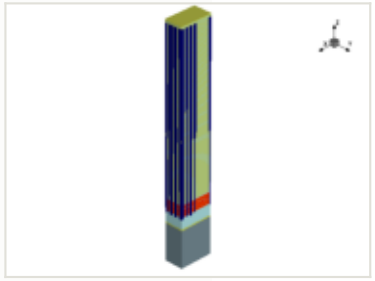

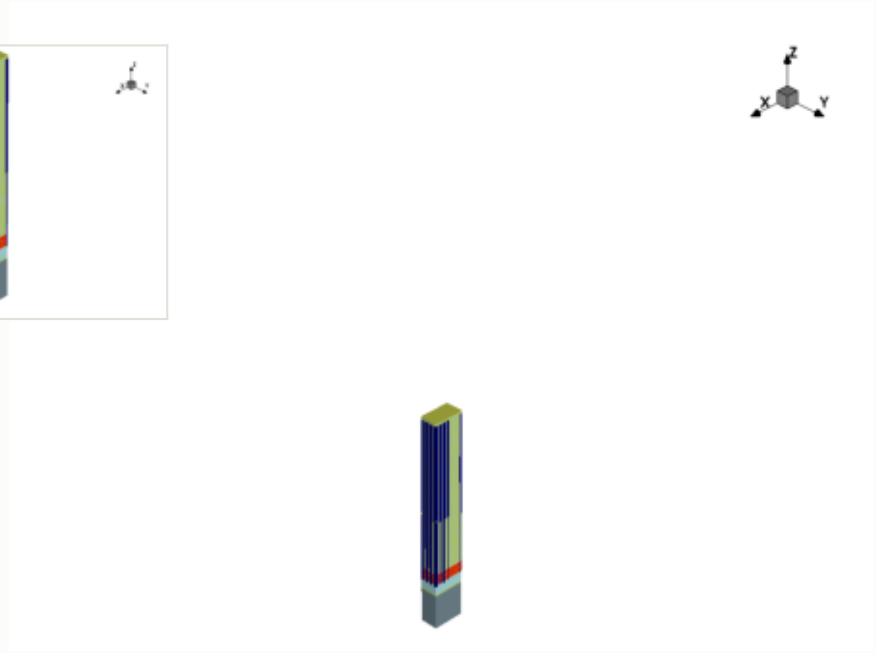

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

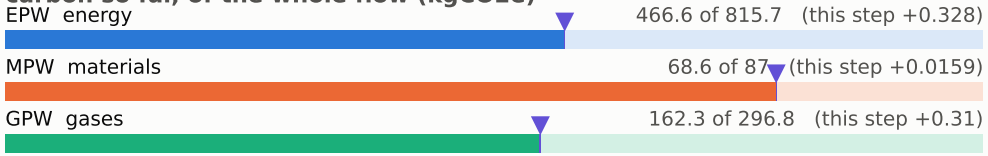

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

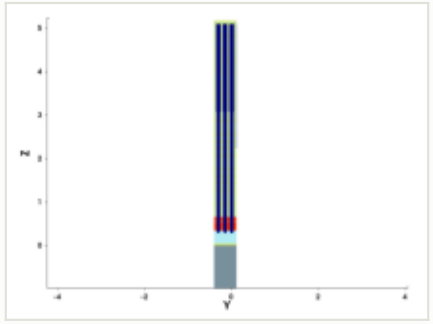

y cut at -0.150 µm

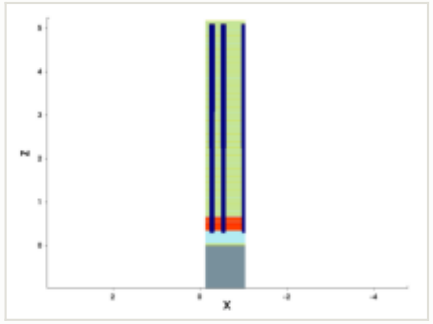

mask for this step

no mask for this step

steps by process area

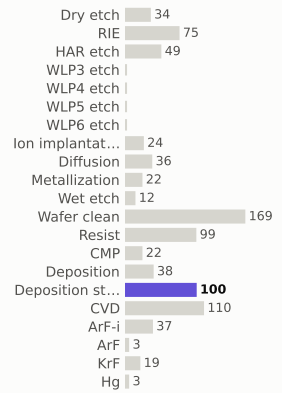

materials deposited (g)

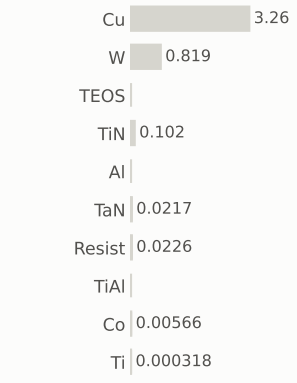

gases emitted (g)

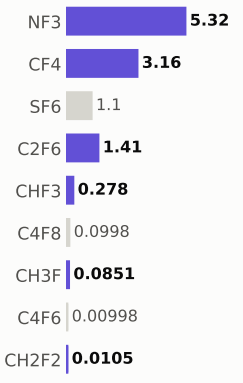

Step #16690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	698.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

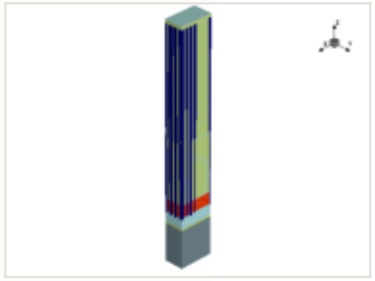

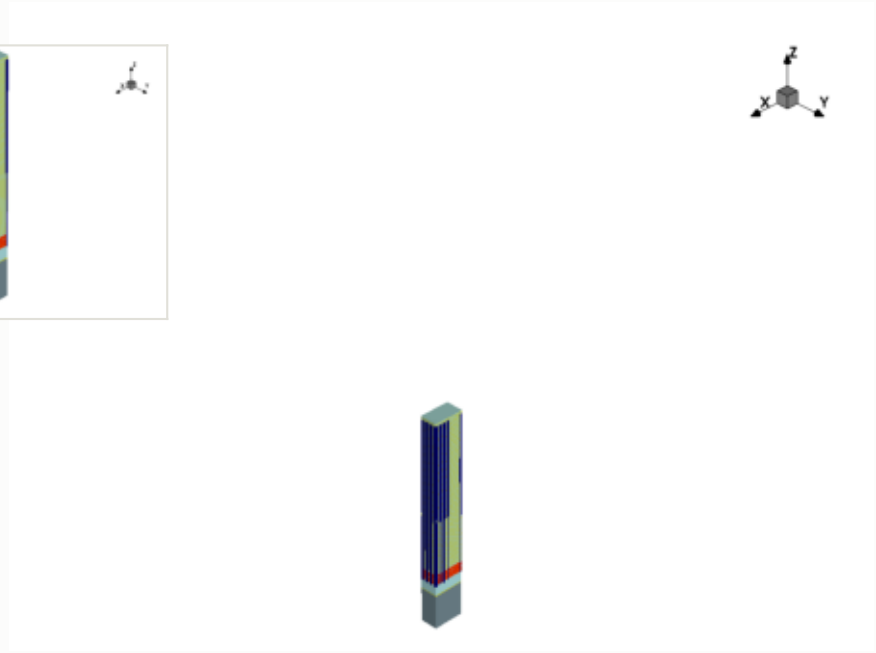

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

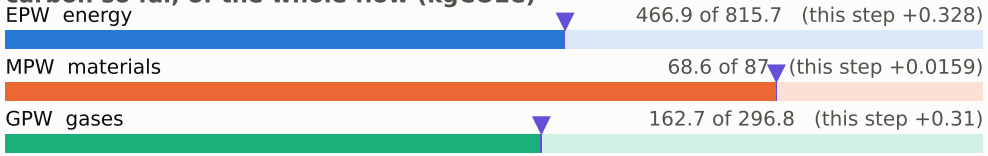

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

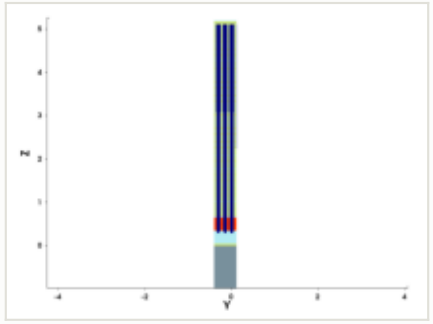

y cut at -0.150 µm

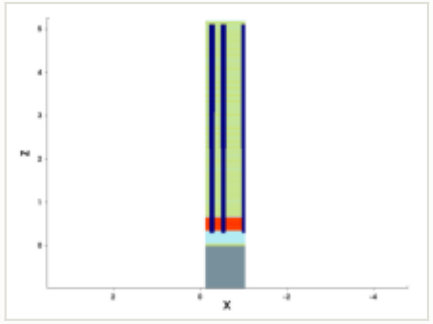

mask for this step

no mask for this step

steps by process area

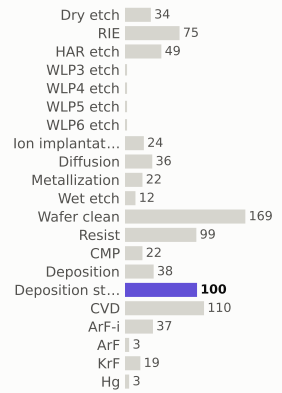

materials deposited (g)

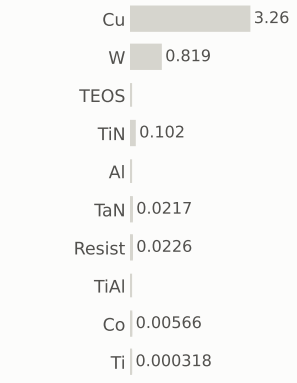

gases emitted (g)

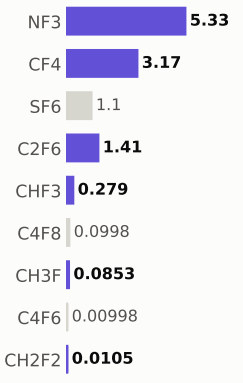

Step #16700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	698.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

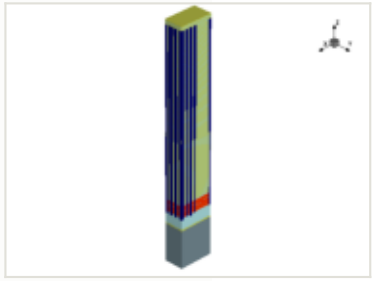

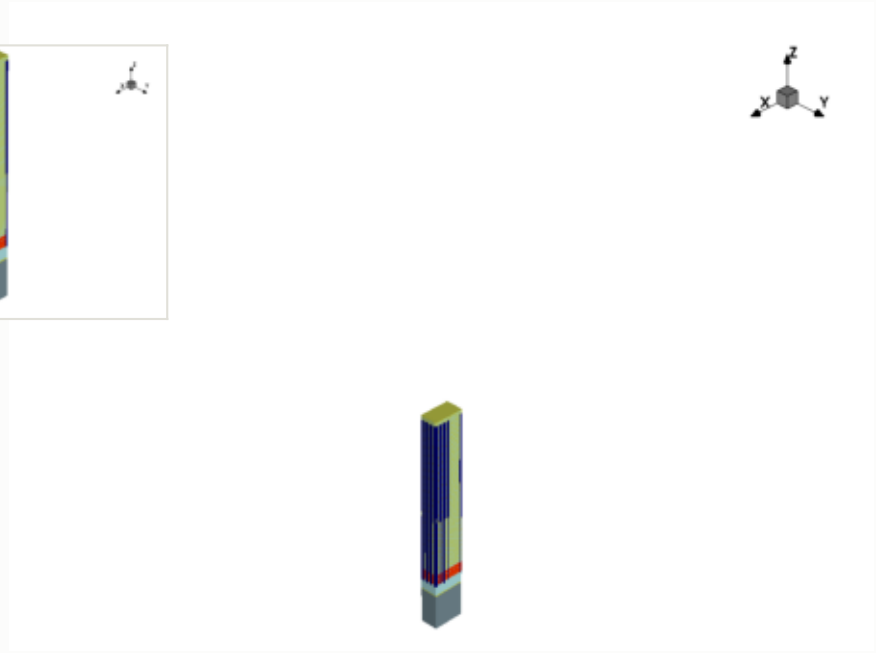

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

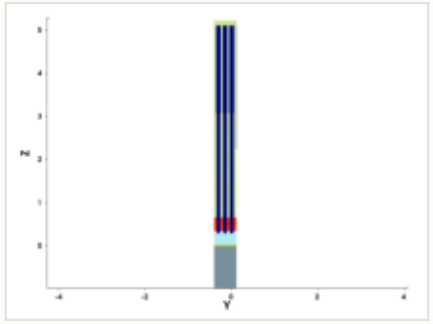

y cut at -0.150 µm

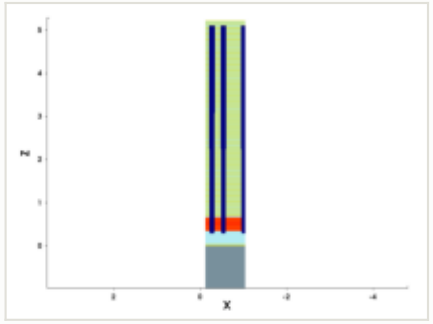

mask for this step

no mask for this step

steps by process area

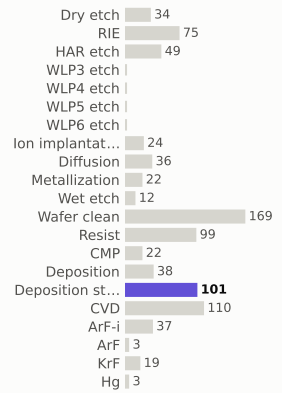

materials deposited (g)

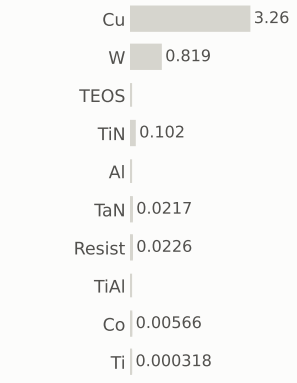

gases emitted (g)

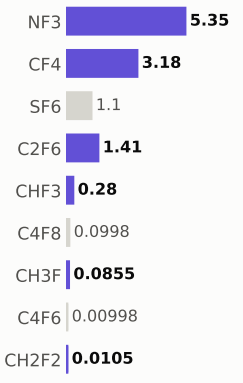

Step #16710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	699.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

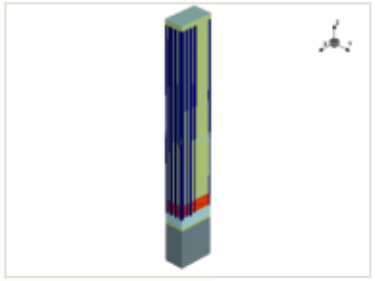

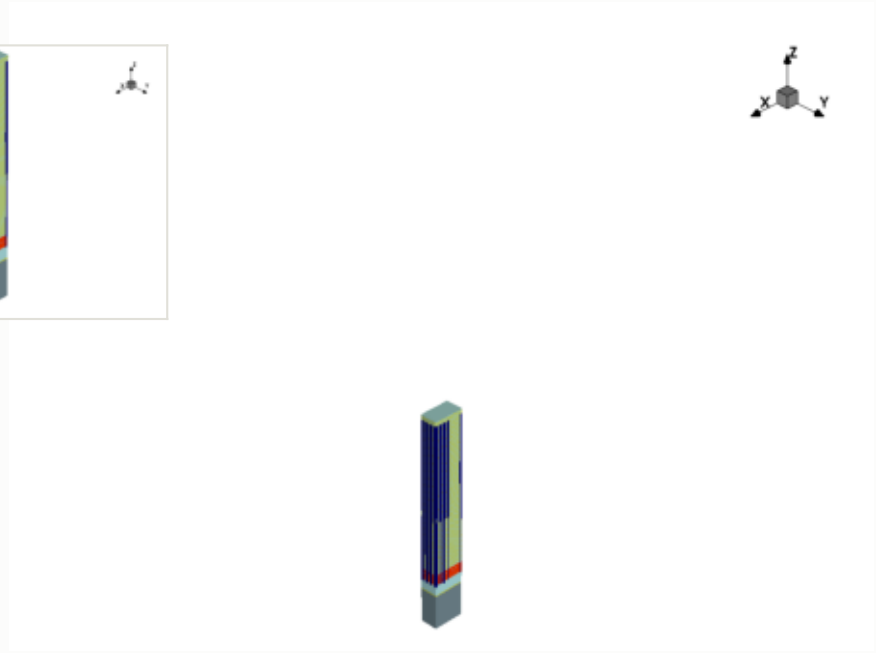

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

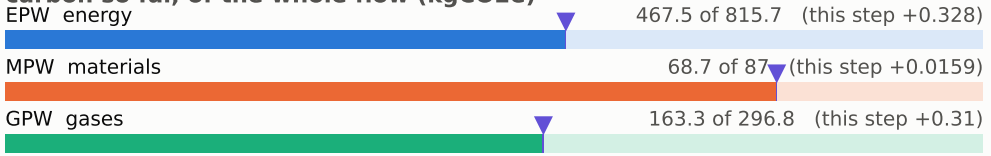

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

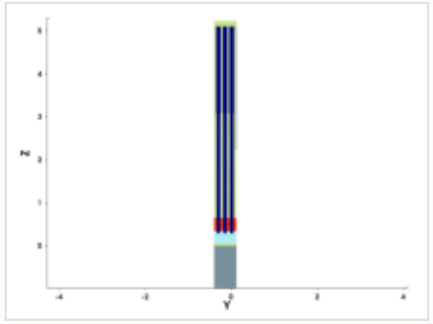

y cut at -0.150 µm

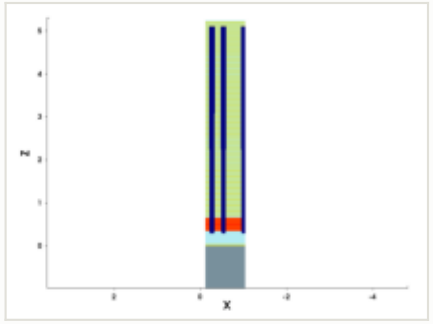

mask for this step

no mask for this step

steps by process area

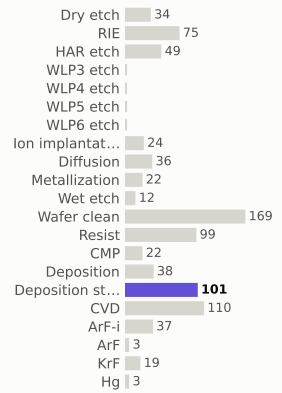

materials deposited (g)

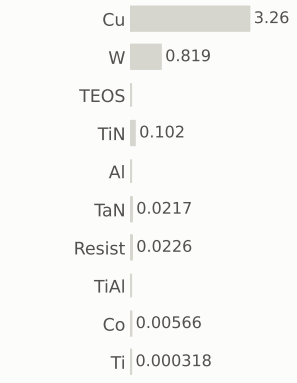

gases emitted (g)

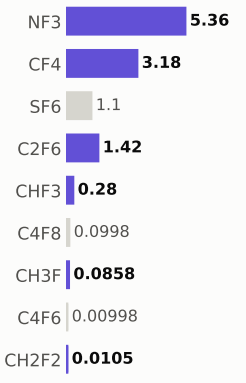

Step #16720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	700.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

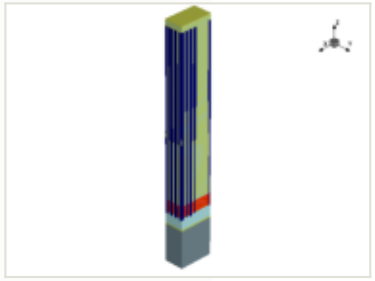

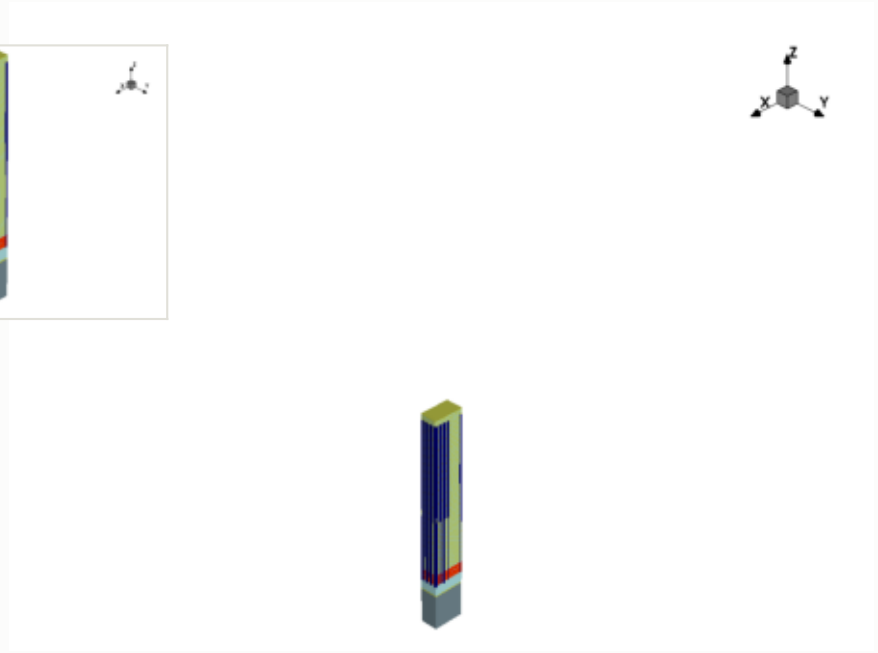

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

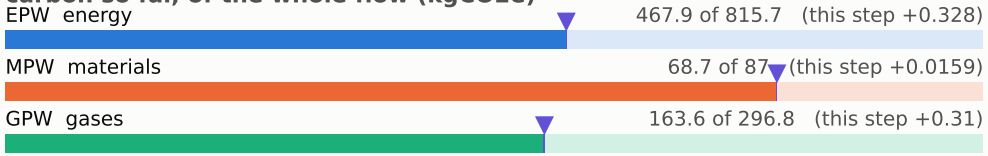

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

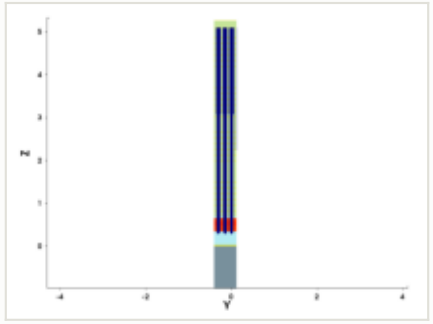

y cut at -0.150 µm

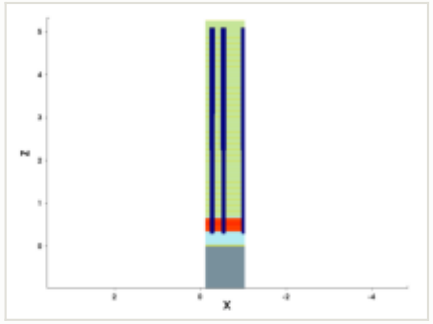

mask for this step

no mask for this step

steps by process area

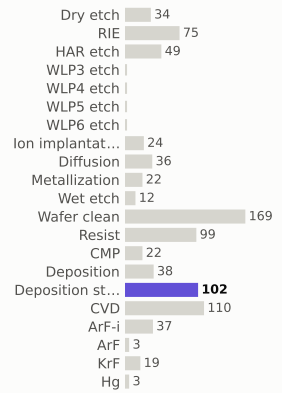

materials deposited (g)

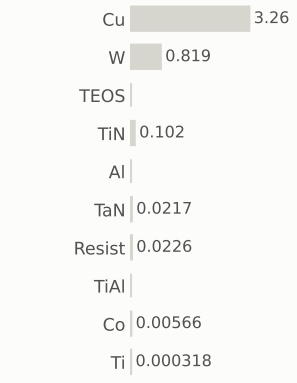

gases emitted (g)

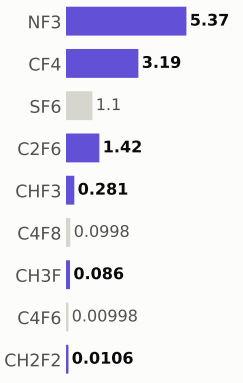

Step #16730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	700.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

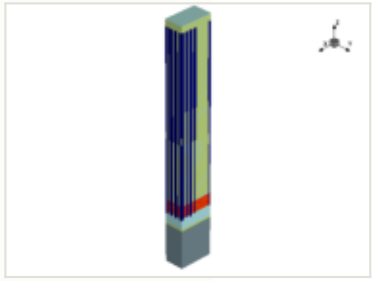

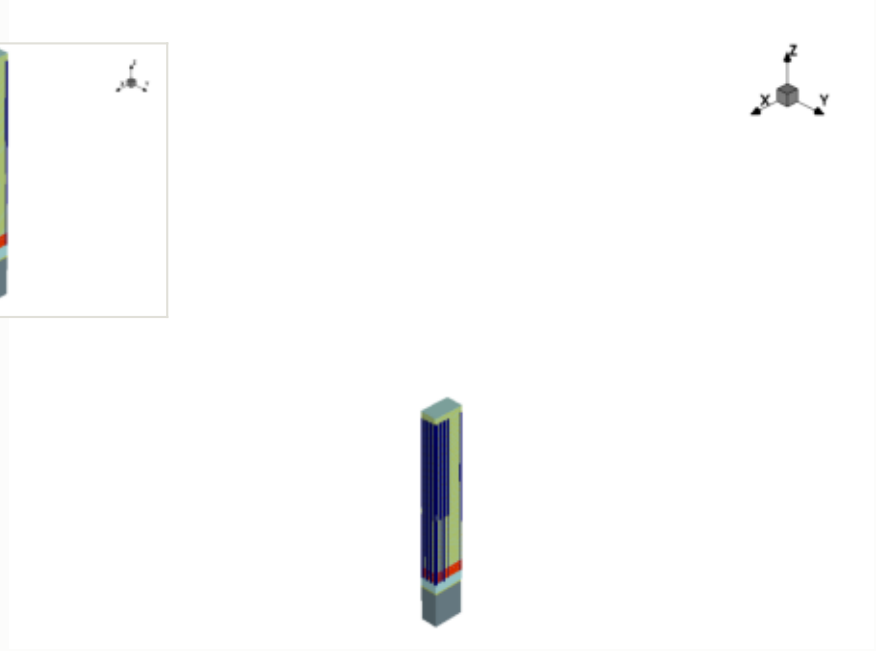

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

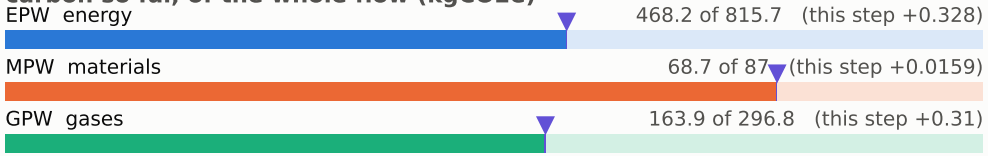

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

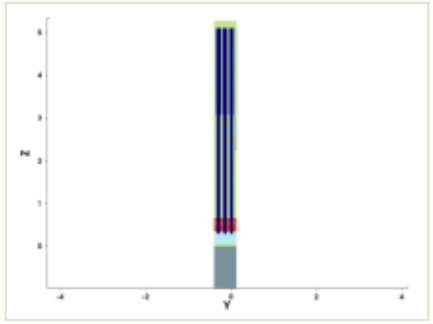

y cut at -0.150 µm

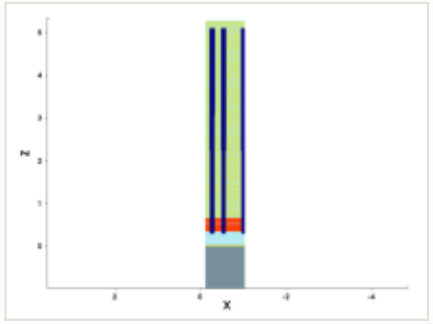

mask for this step

no mask for this step

steps by process area

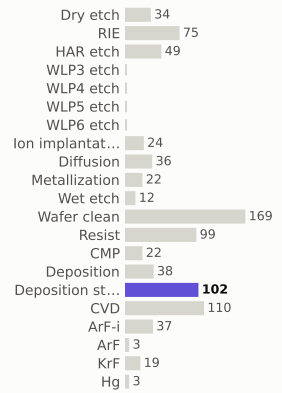

materials deposited (g)

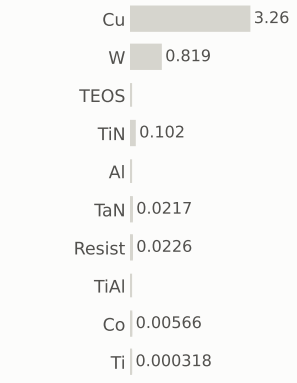

gases emitted (g)

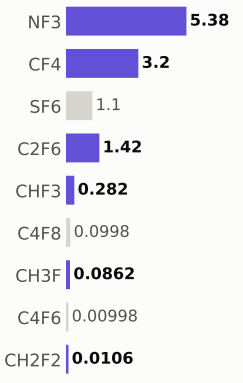

Step #16740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	701.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

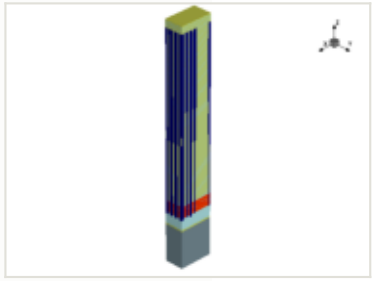

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

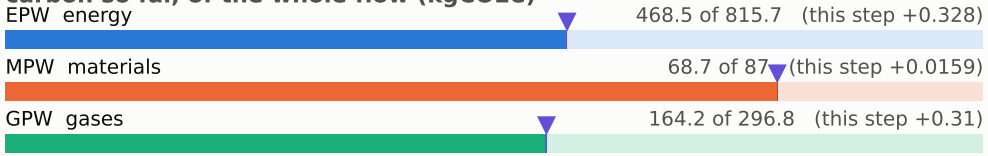

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

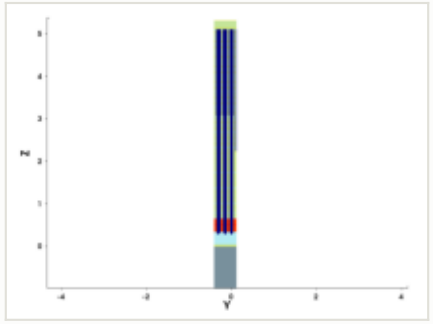

y cut at -0.150 µm

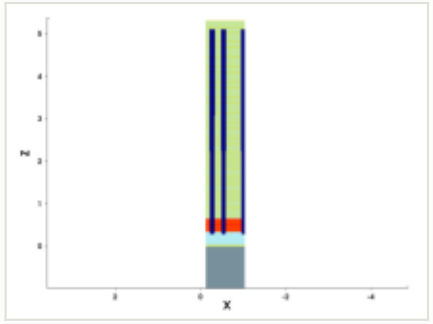

mask for this step

no mask for this step

steps by process area

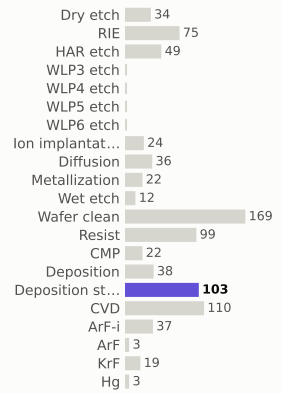

materials deposited (g)

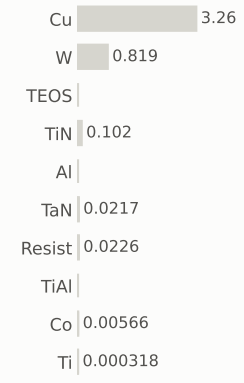

gases emitted (g)

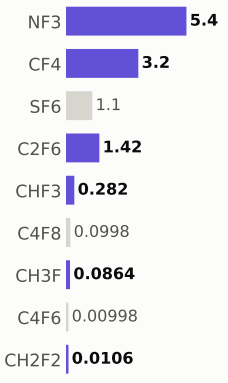

Step #16750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	702.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

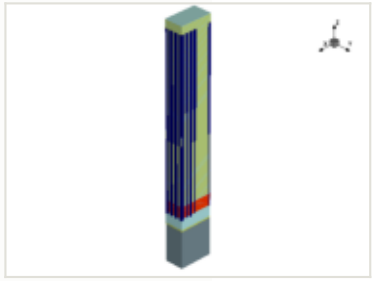

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

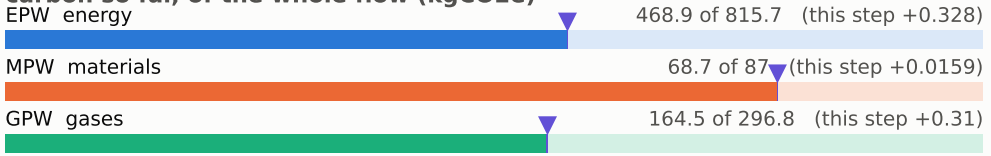

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

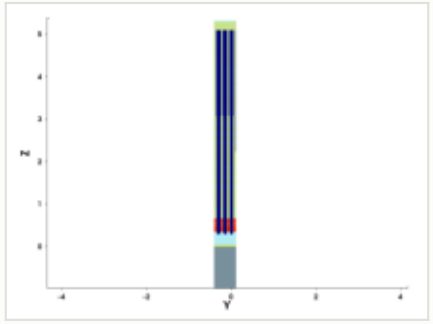

y cut at -0.150 µm

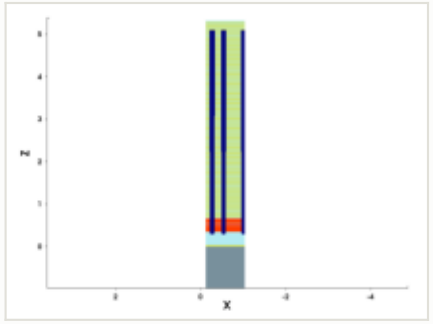

mask for this step

no mask for this step

steps by process area

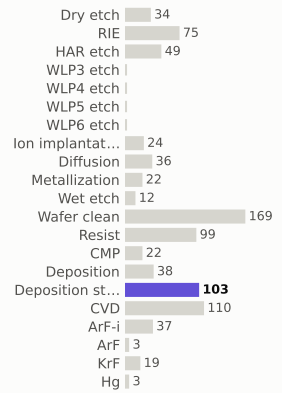

materials deposited (g)

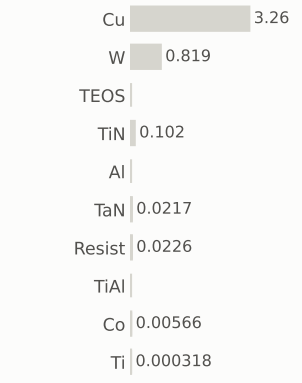

gases emitted (g)

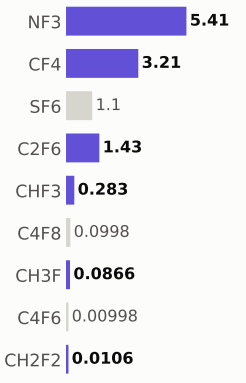

Step #16760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	702.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

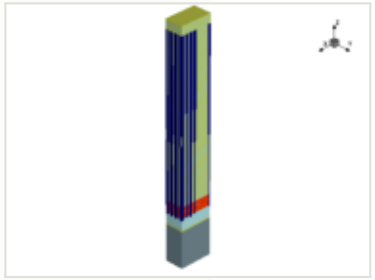



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

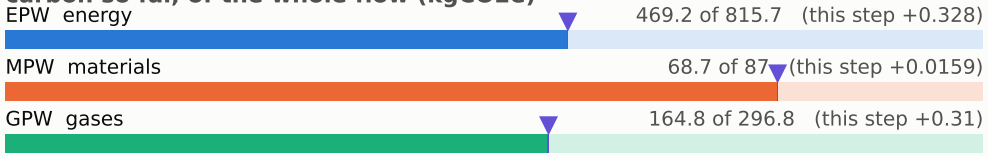

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

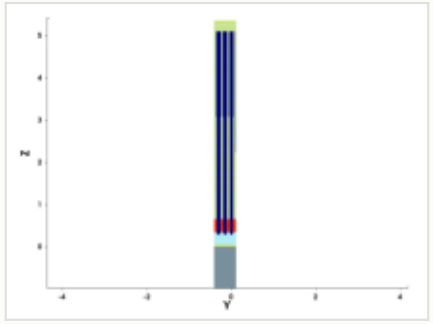

y cut at -0.150 µm

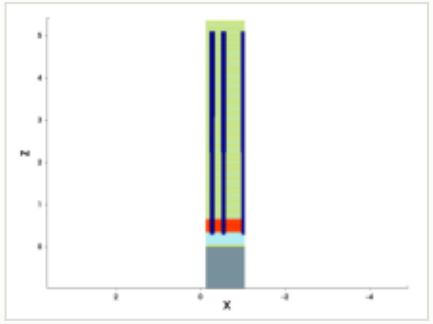

mask for this step

no mask for this step

steps by process area

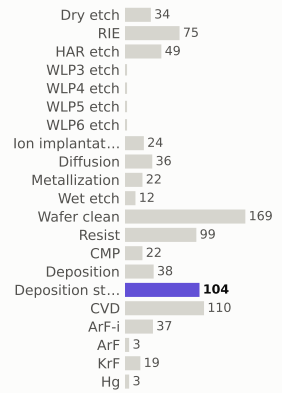

materials deposited (g)

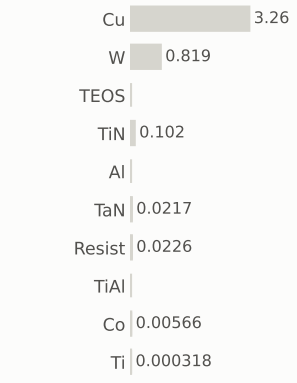

gases emitted (g)

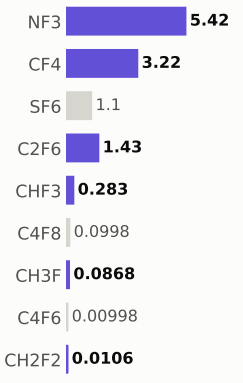

Step #16770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	703.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

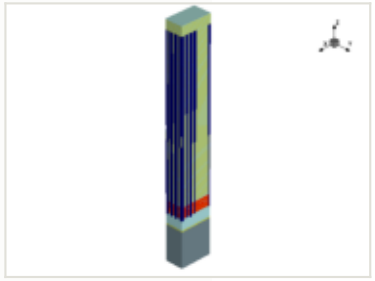

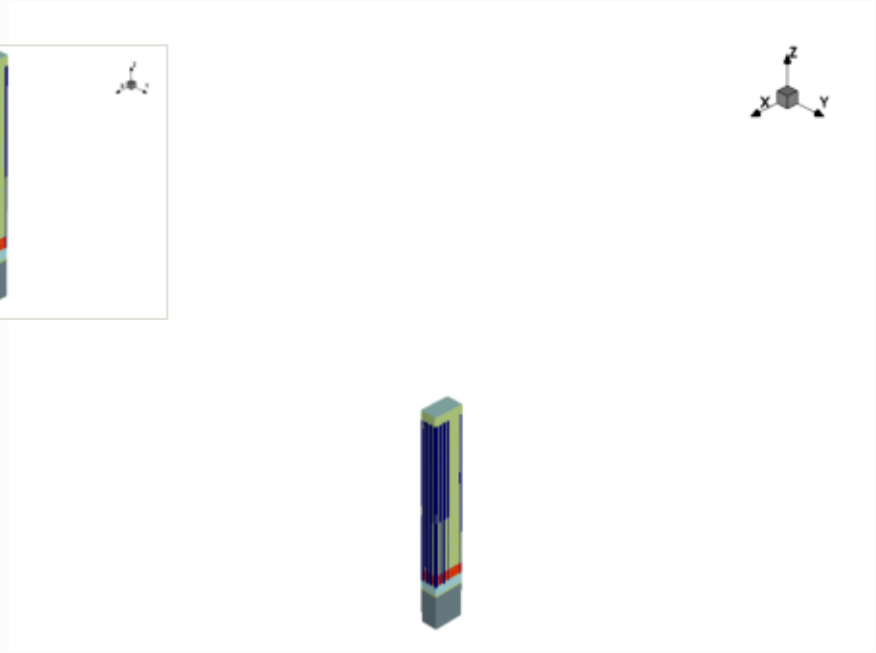

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

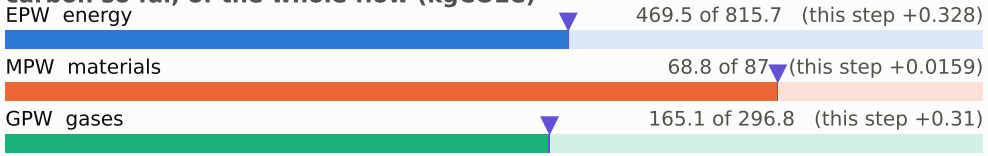

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

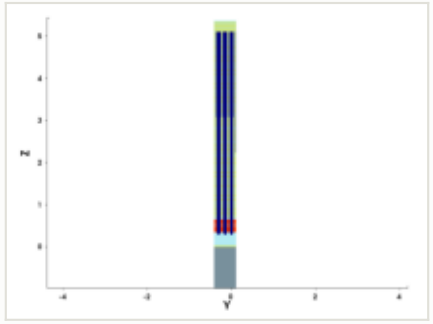

y cut at -0.150 µm

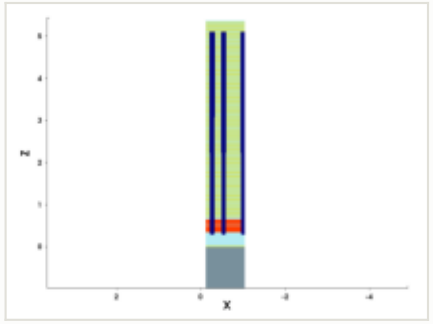

mask for this step

no mask for this step

steps by process area

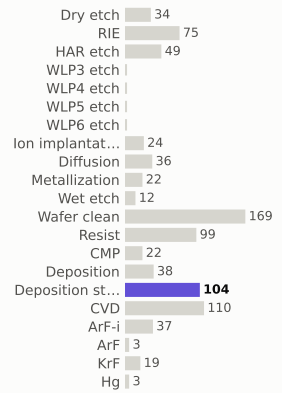

materials deposited (g)

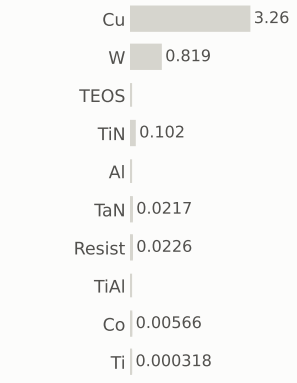

gases emitted (g)

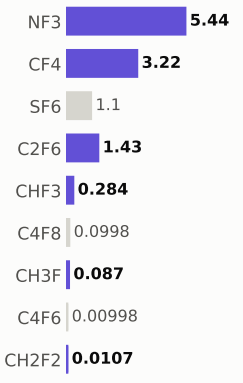

Step #16780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	704.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

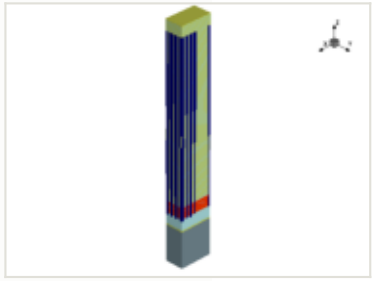

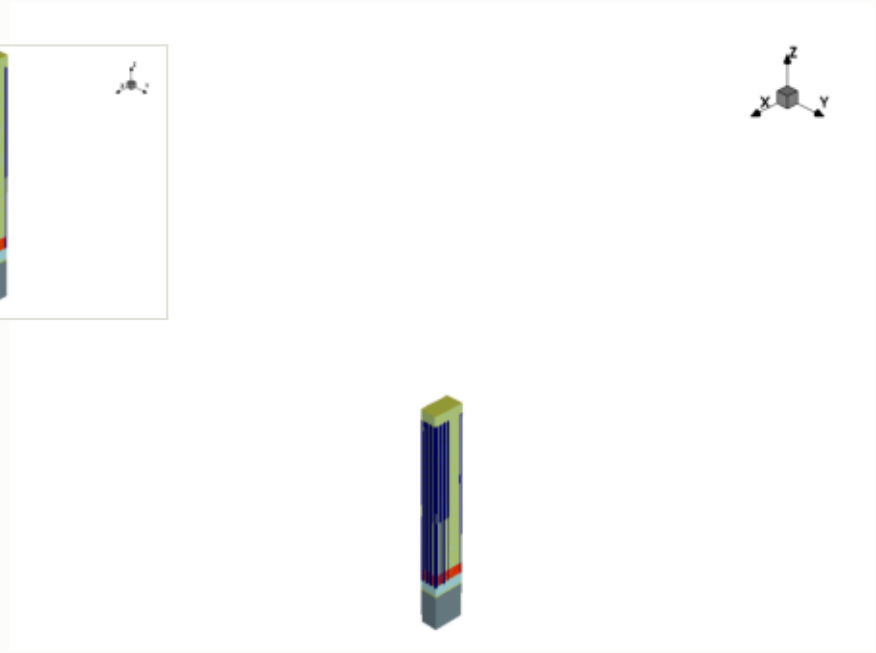

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

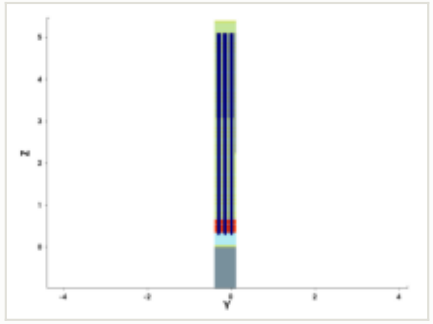

y cut at -0.150 µm

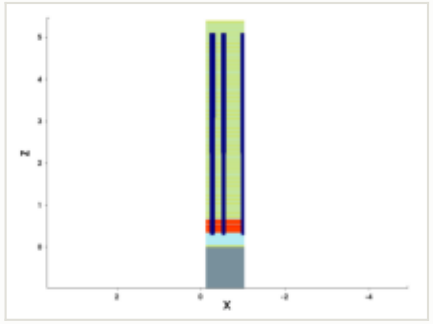

mask for this step

no mask for this step

steps by process area

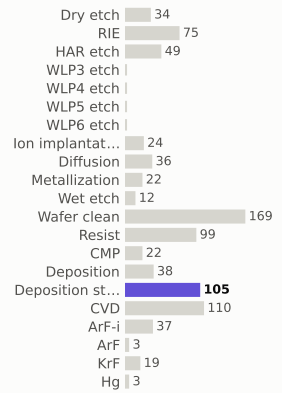

materials deposited (g)

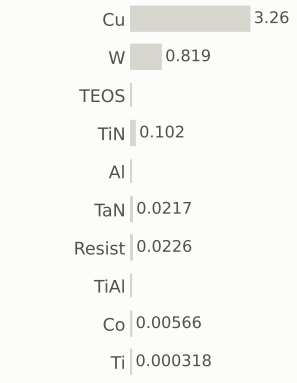

gases emitted (g)

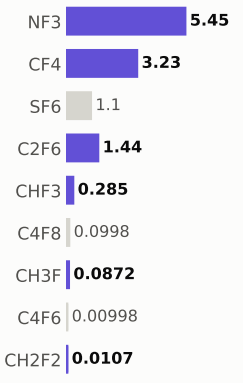

Step #16790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	704.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

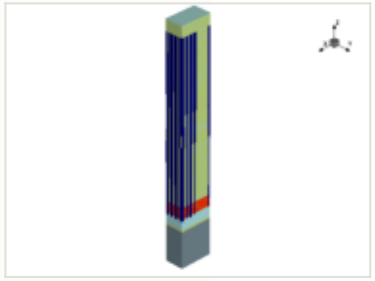

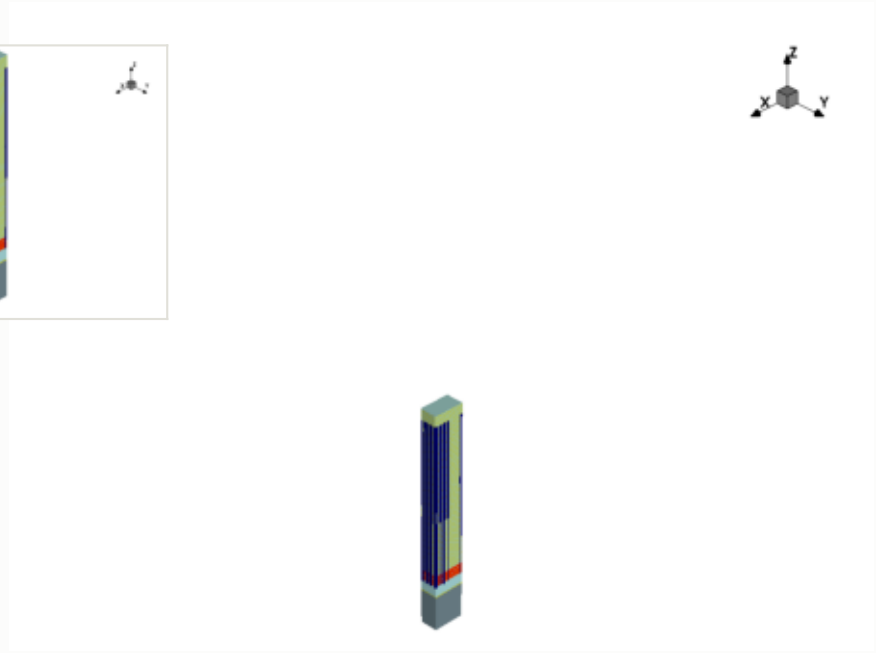

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

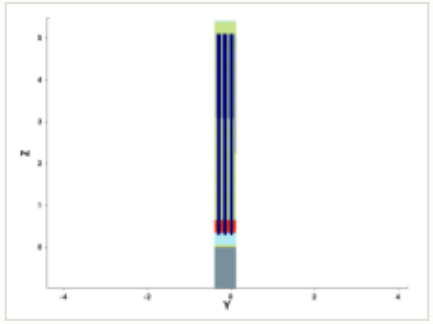

y cut at -0.150 µm

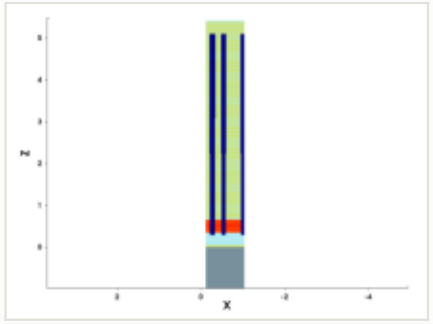

mask for this step

no mask for this step

steps by process area

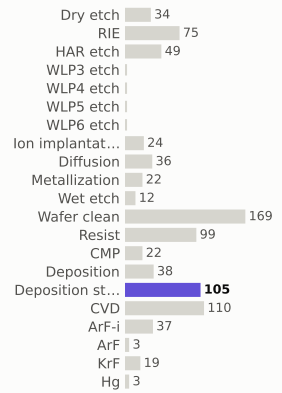

materials deposited (g)

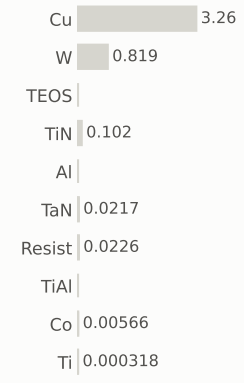

gases emitted (g)

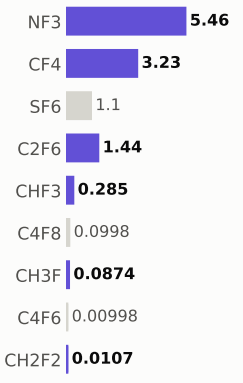

Step #16800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	705.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

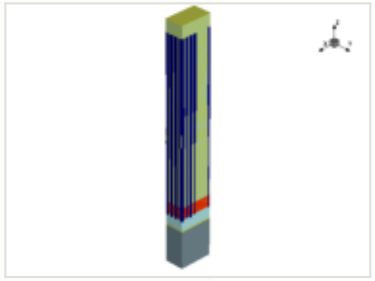

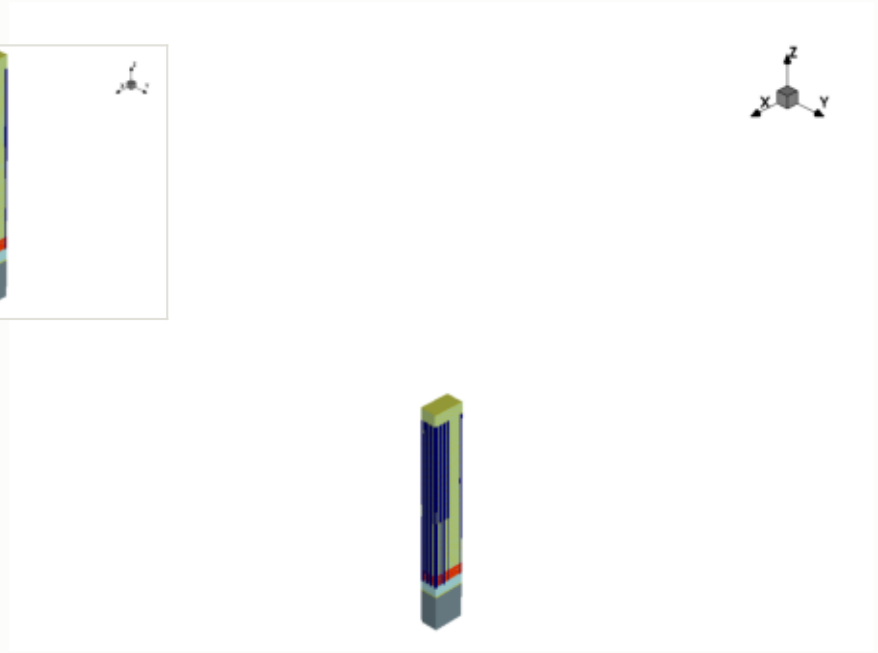

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

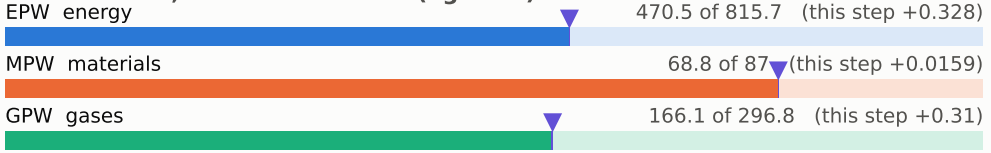

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

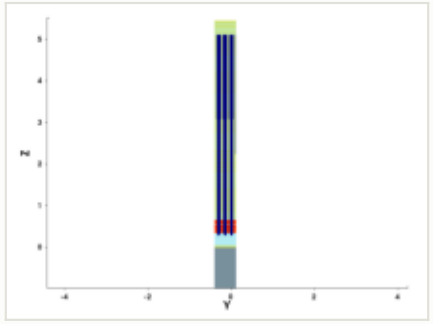

y cut at -0.150 µm

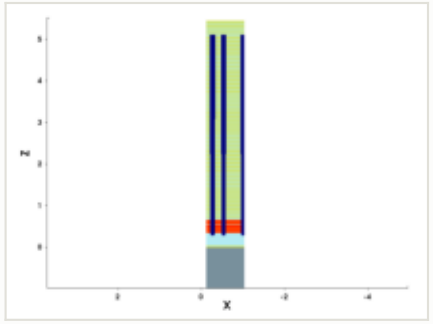

mask for this step

no mask for this step

steps by process area

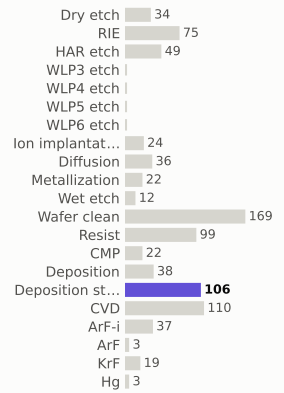

materials deposited (g)

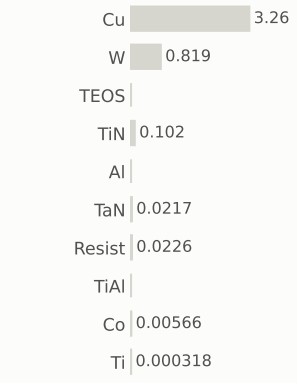

gases emitted (g)

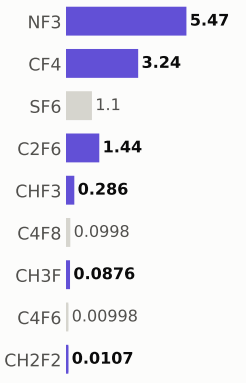

Step #16810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	706.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

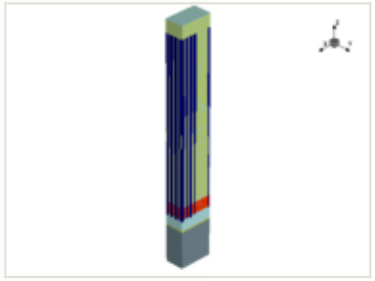

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

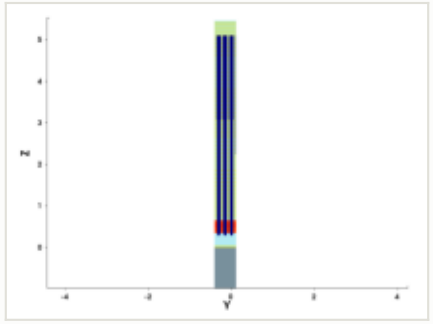

y cut at -0.150 µm

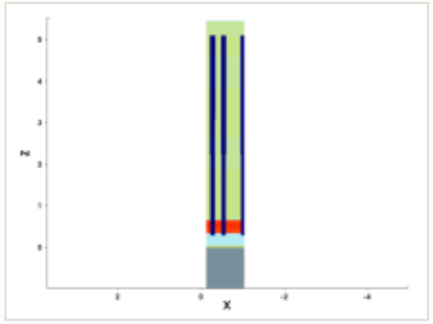

mask for this step

no mask for this step

steps by process area

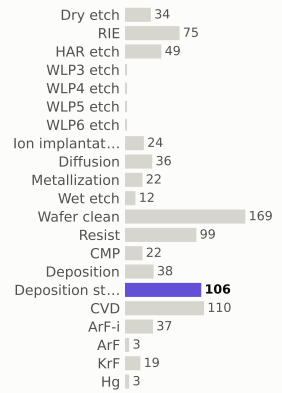

materials deposited (g)

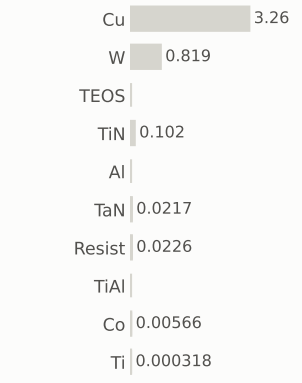

gases emitted (g)

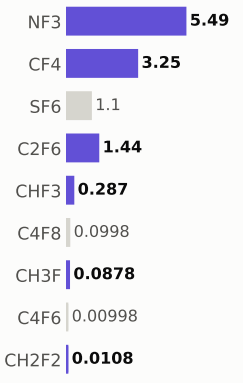

Step #16820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	706.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

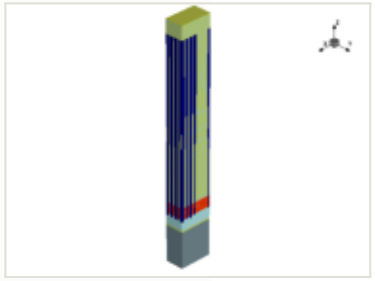

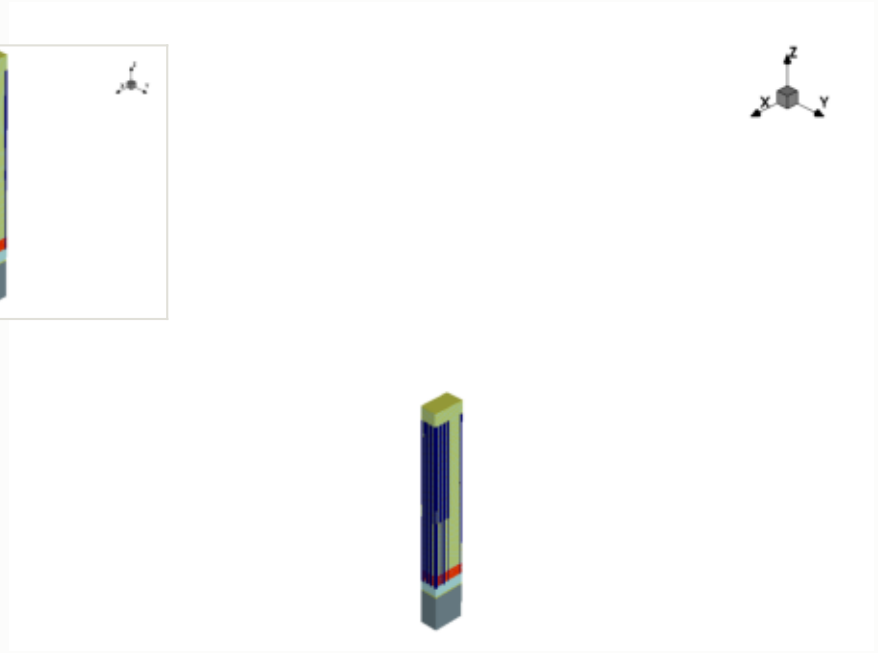

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

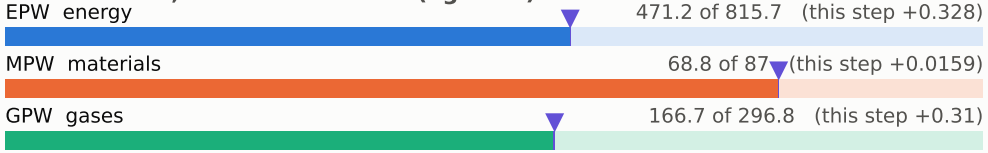

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

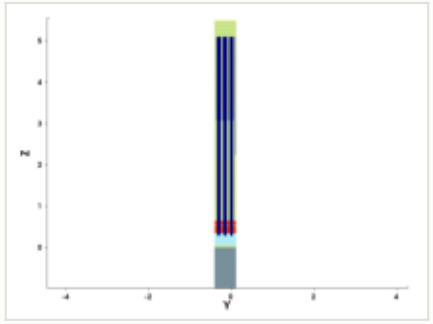

y cut at -0.150 µm

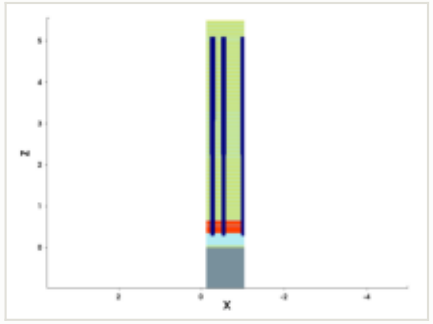

mask for this step

no mask for this step

steps by process area

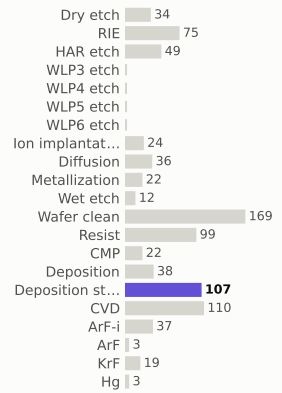

materials deposited (g)

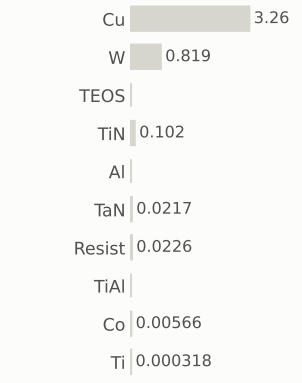

gases emitted (g)

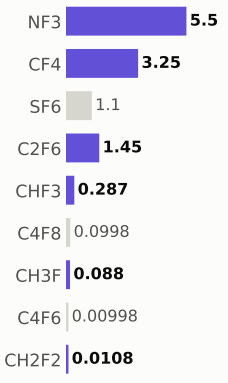

Step #16830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	707.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

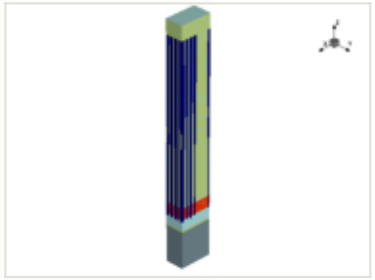



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

EPW energy — 471.5 of 815.7 (this step +0.328)

MPW materials — 68.8 of 87 (this step +0.0159)

GPW gases — 167.0 of 296.8 (this step +0.31)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

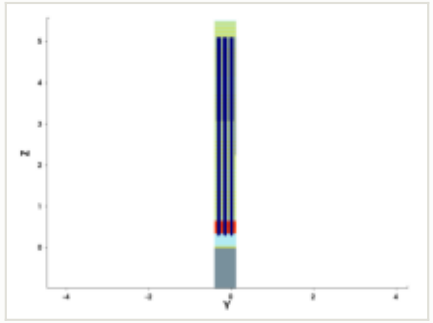

y cut at -0.150 µm

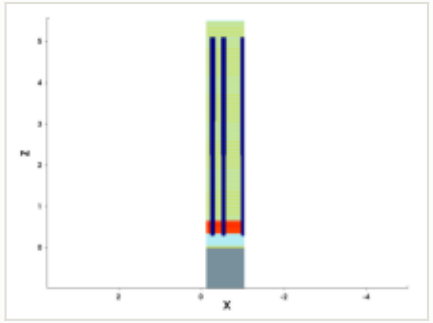

mask for this step

no mask for this step

steps by process area

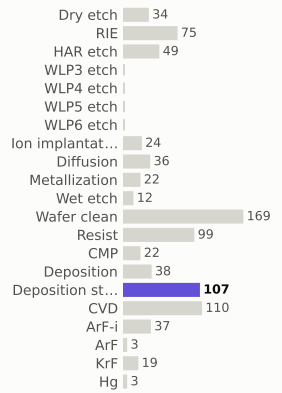

materials deposited (g)

gases emitted (g)

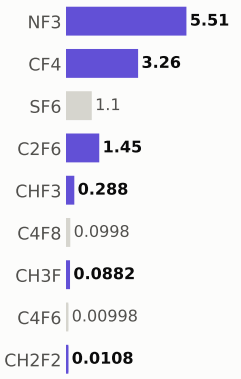

Step #16840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	708.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

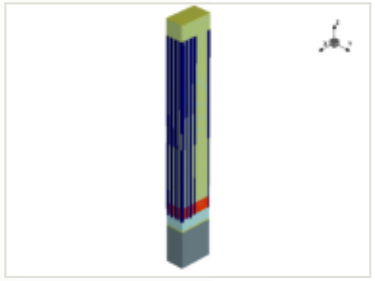

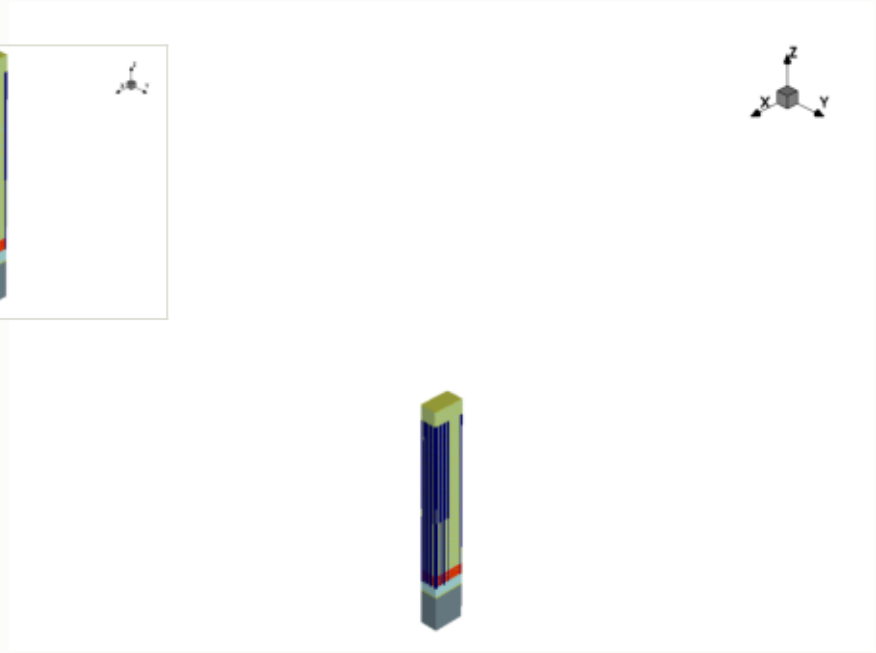

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

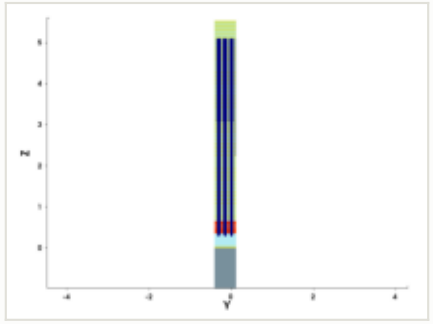

y cut at -0.150 µm

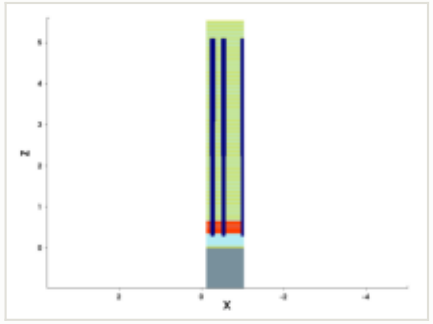

mask for this step

no mask for this step

steps by process area

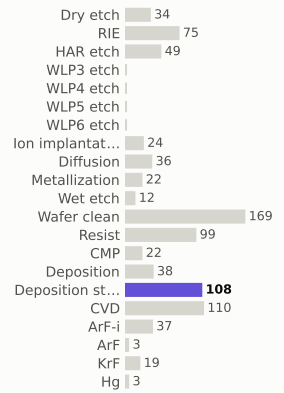

materials deposited (g)

gases emitted (g)

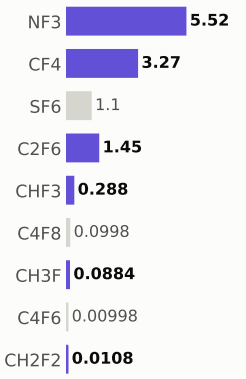

Step #16850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	708.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

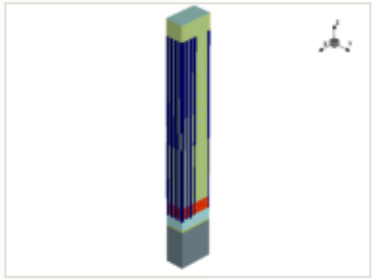

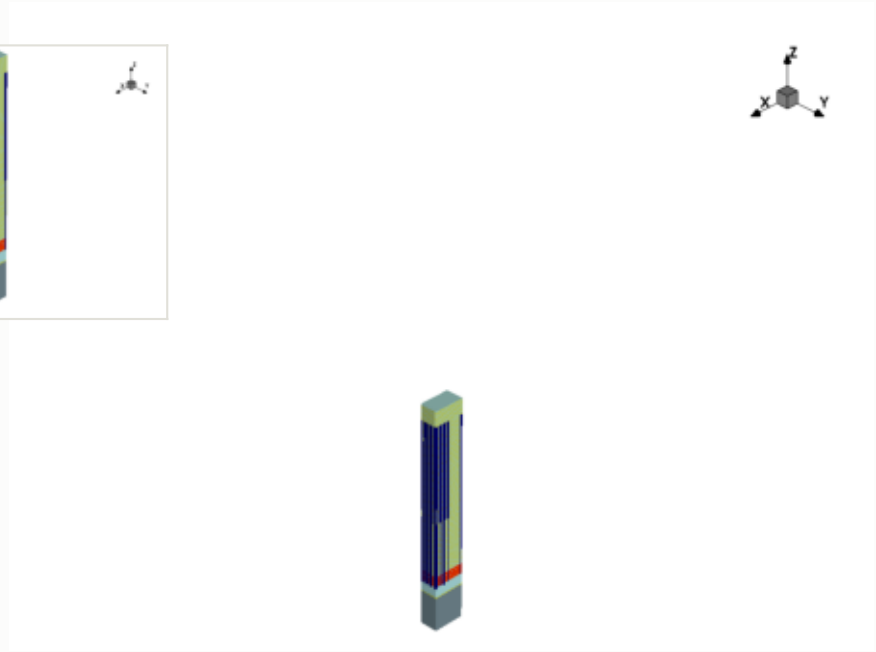

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

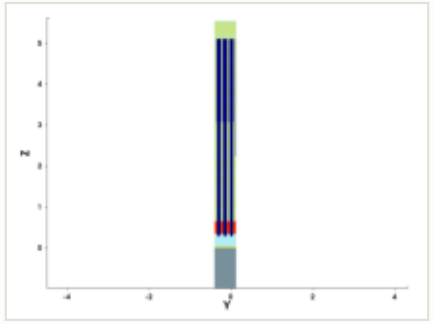

y cut at -0.150 µm

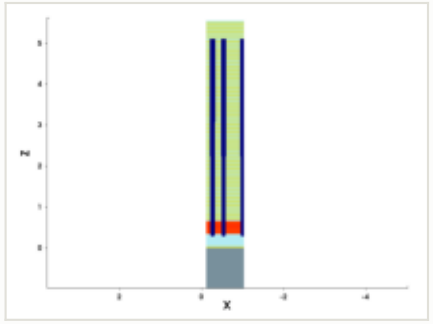

mask for this step

no mask for this step

steps by process area

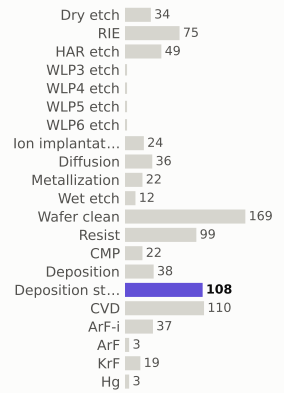

materials deposited (g)

gases emitted (g)

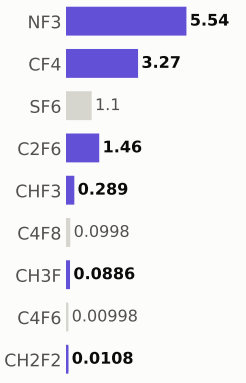

Step #16860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	709.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

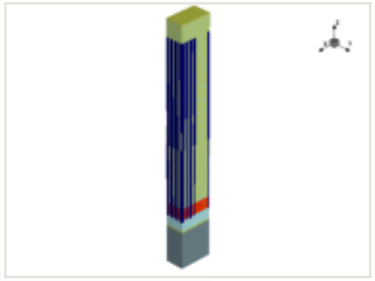

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

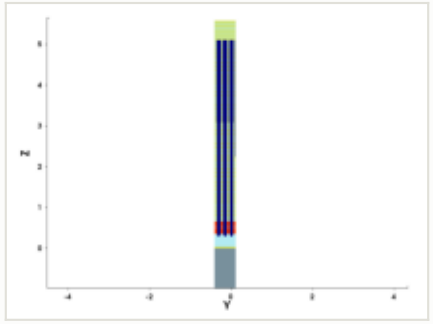

y cut at -0.150 µm

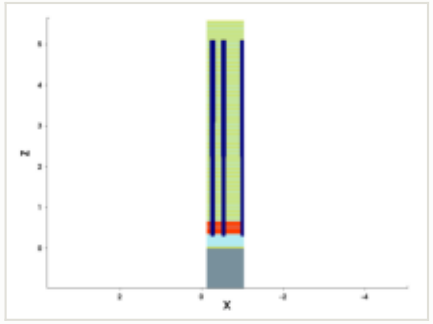

mask for this step

no mask for this step

steps by process area

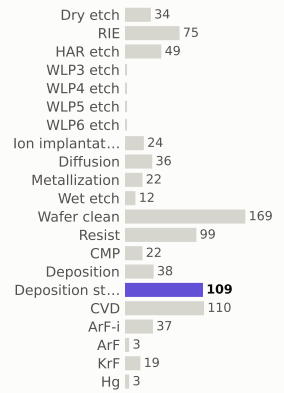

materials deposited (g)

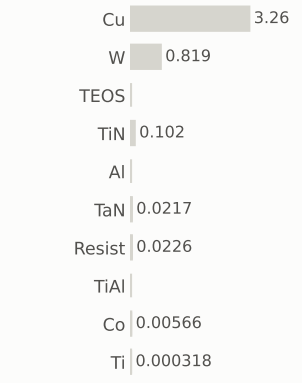

gases emitted (g)

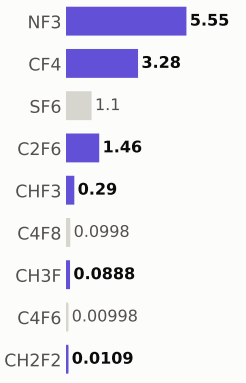

Step #16870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	709.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

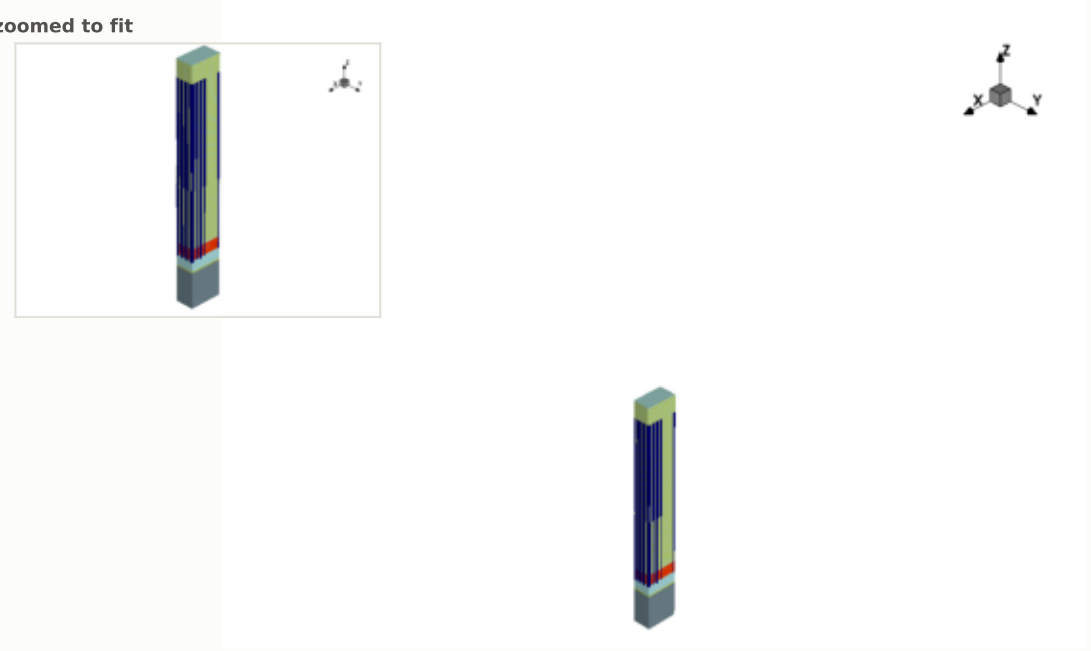

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

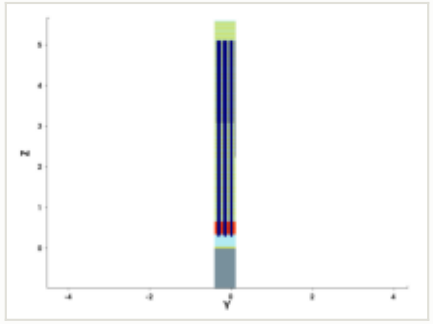

y cut at -0.150 µm

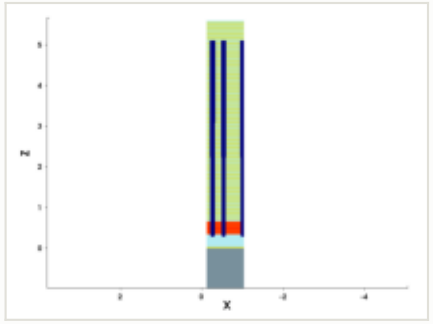

mask for this step

no mask for this step

steps by process area

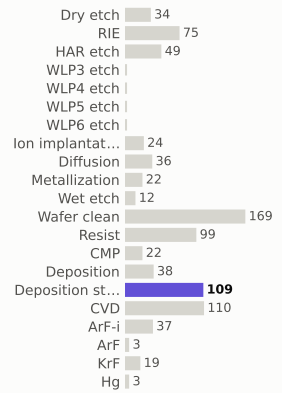

materials deposited (g)

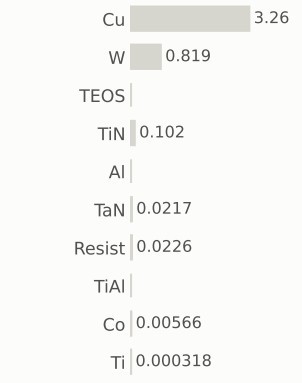

gases emitted (g)

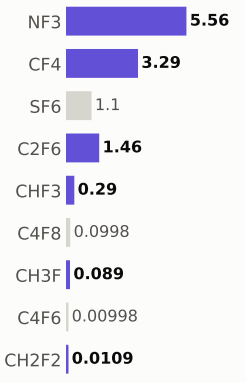

Step #16880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	710.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

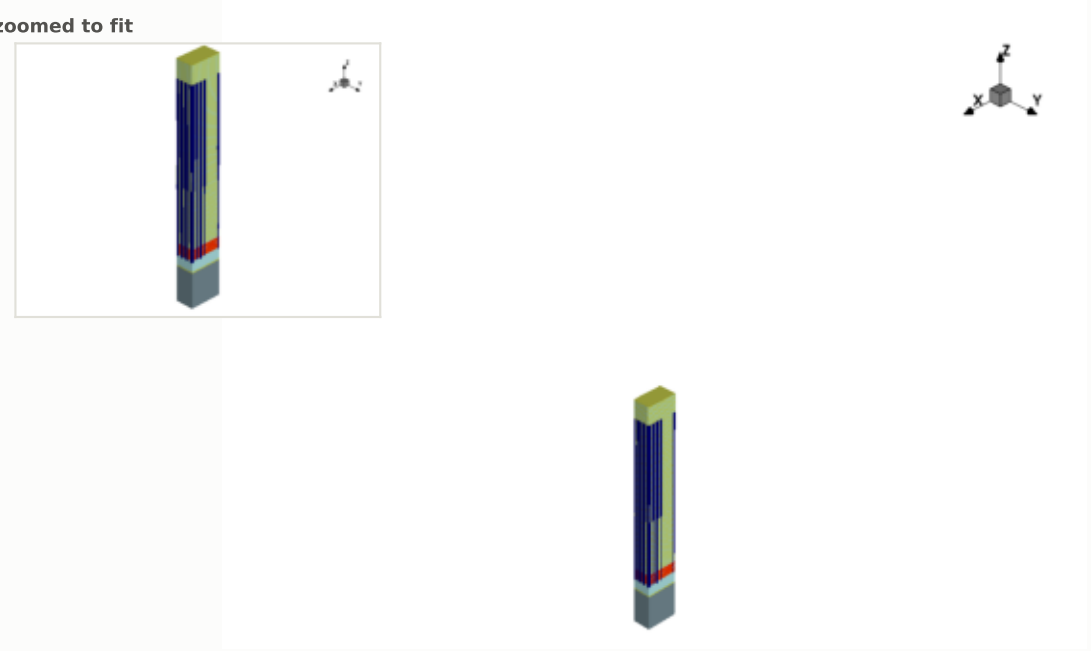

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

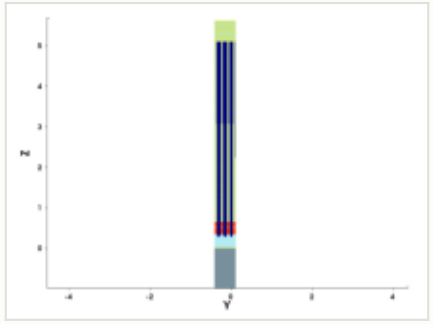

y cut at -0.150 µm

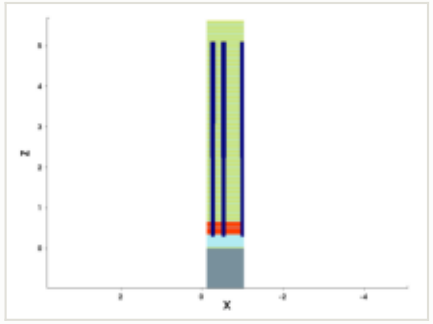

mask for this step

no mask for this step

steps by process area

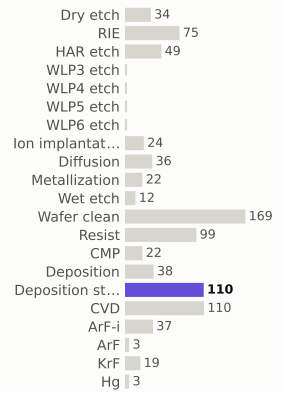

materials deposited (g)

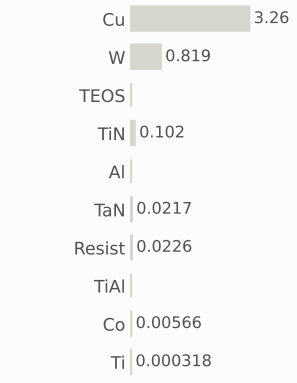

gases emitted (g)

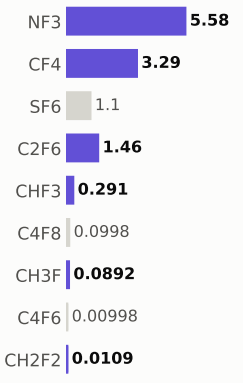

Step #16890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	711.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

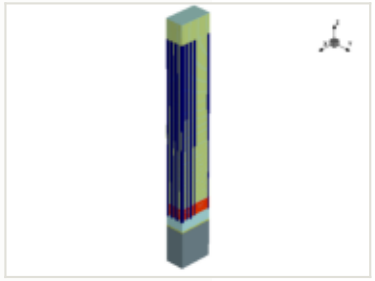

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

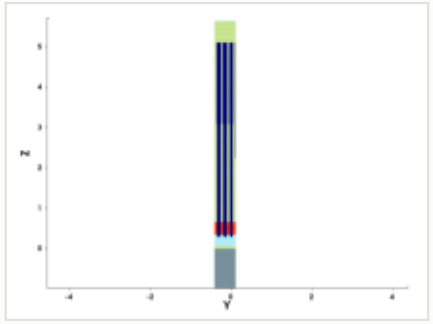

y cut at -0.150 µm

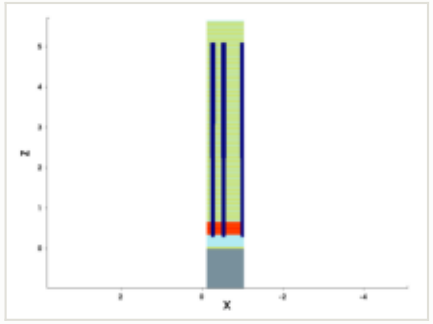

mask for this step

no mask for this step

steps by process area

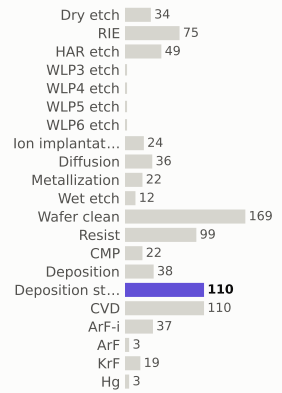

materials deposited (g)

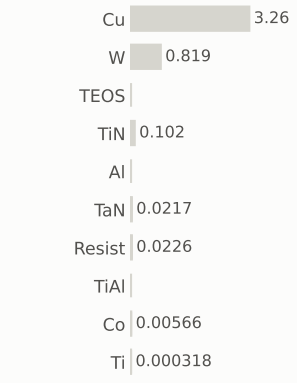

gases emitted (g)

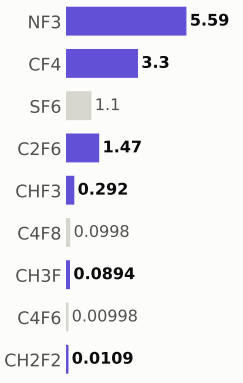

Step #16900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	711.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

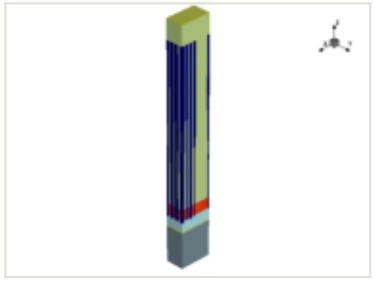

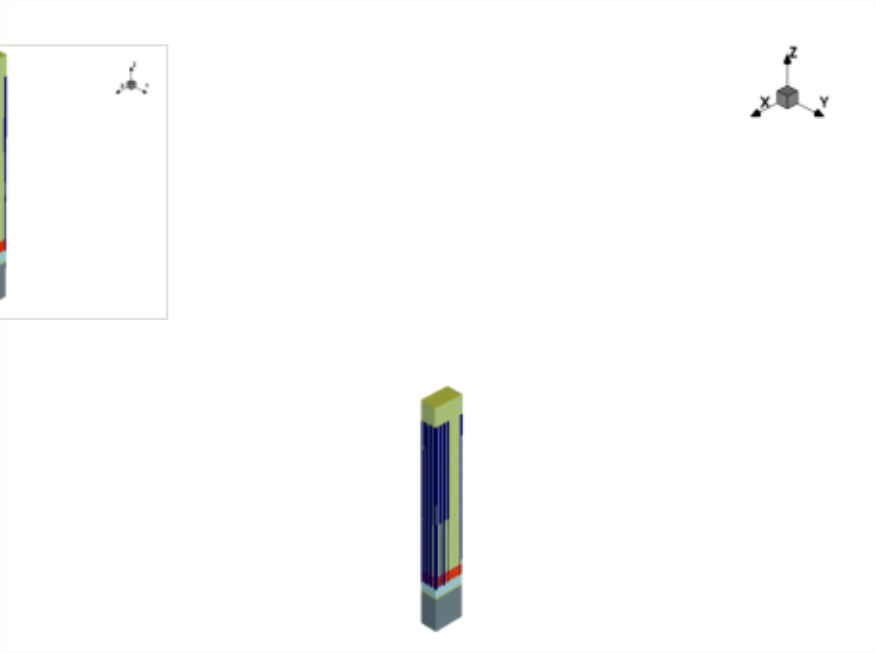

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

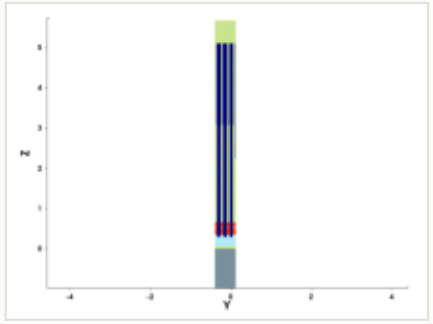

y cut at -0.150 µm

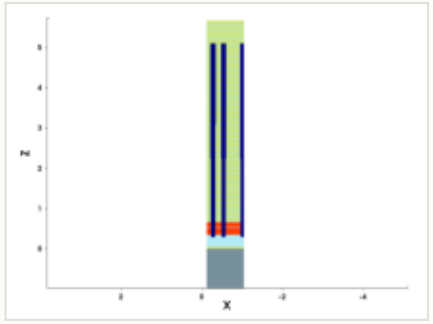

mask for this step

no mask for this step

steps by process area

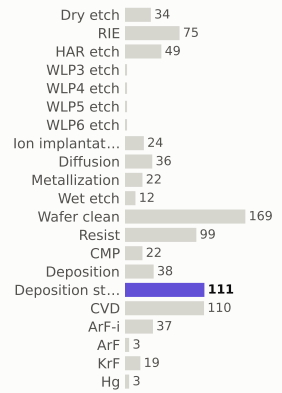

materials deposited (g)

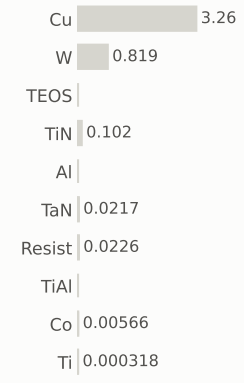

gases emitted (g)

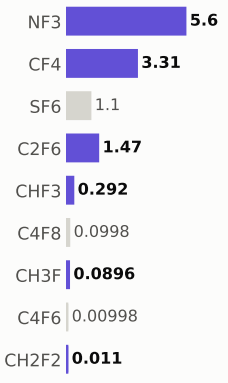

Step #16910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	712.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

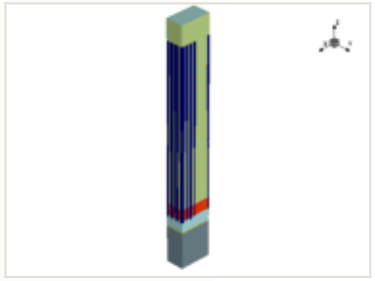

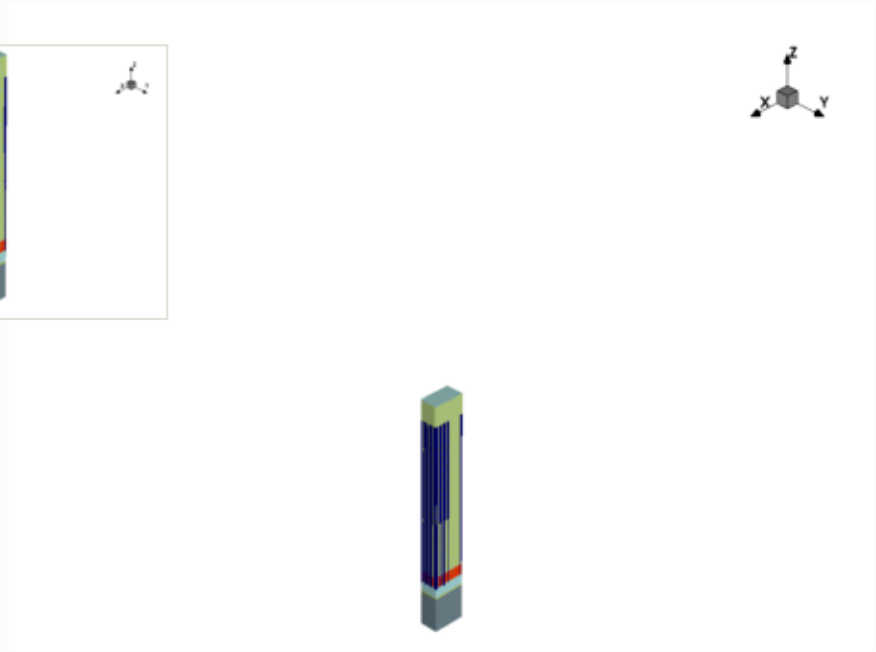

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

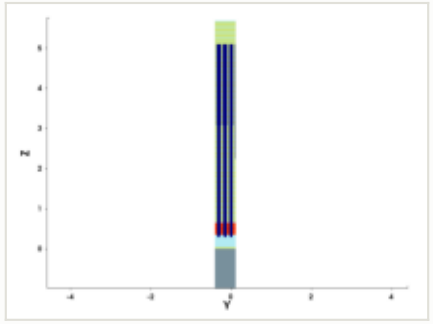

y cut at -0.150 µm

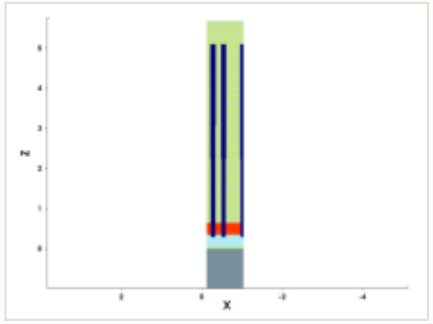

mask for this step

no mask for this step

steps by process area

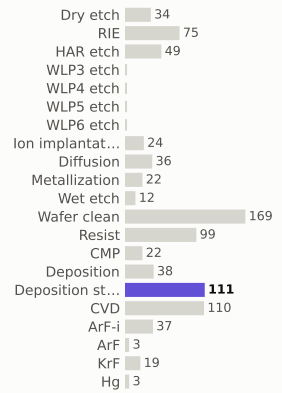

materials deposited (g)

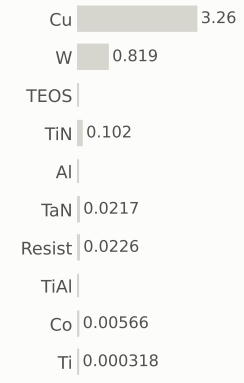

gases emitted (g)

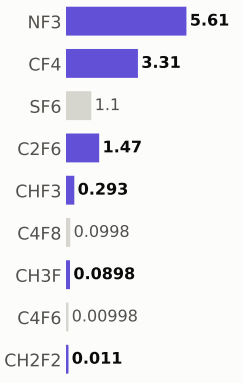

Step #16920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	713.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

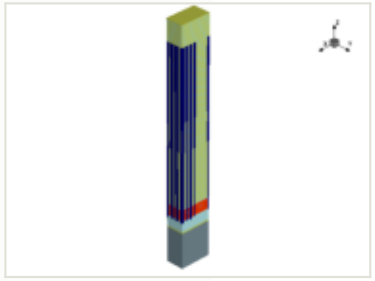

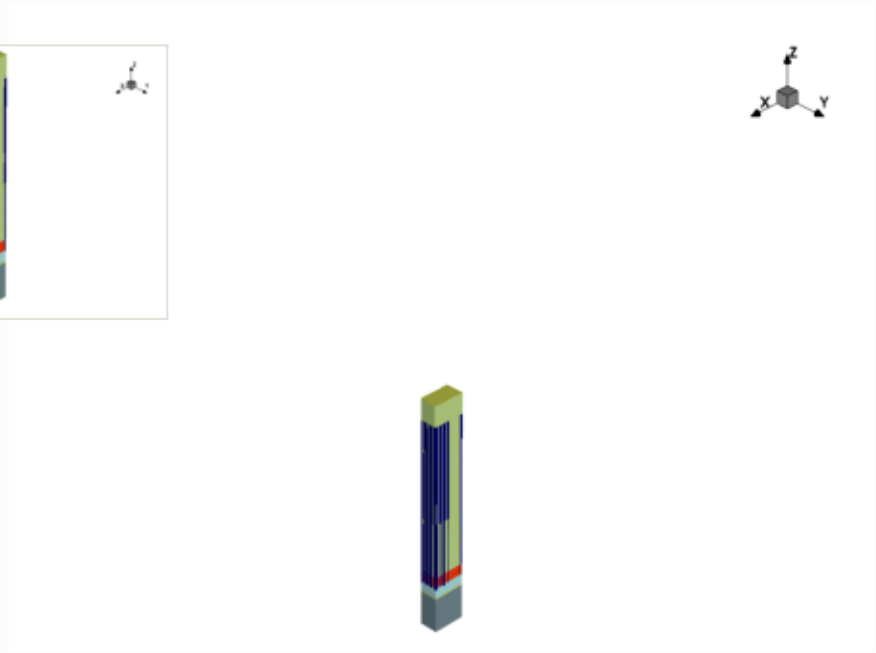

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

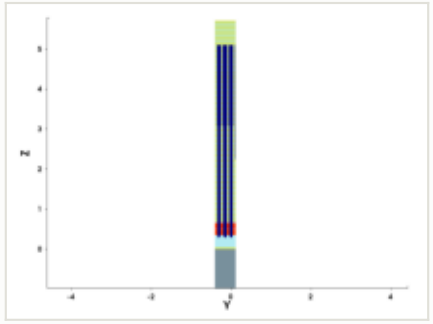

y cut at -0.150 µm

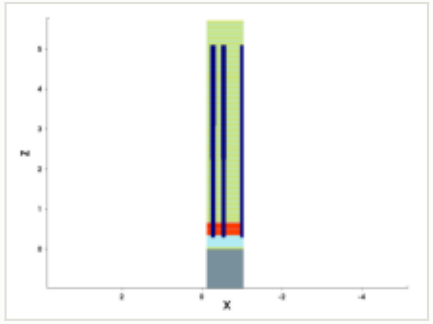

mask for this step

no mask for this step

steps by process area

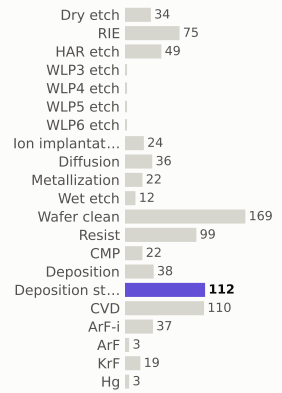

materials deposited (g)

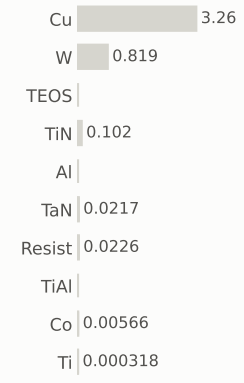

gases emitted (g)

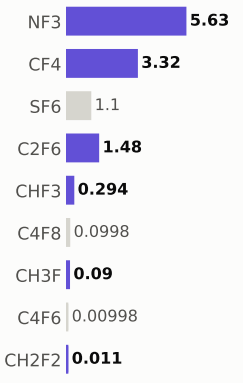

Step #16930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	713.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

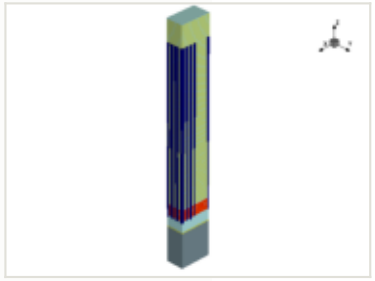

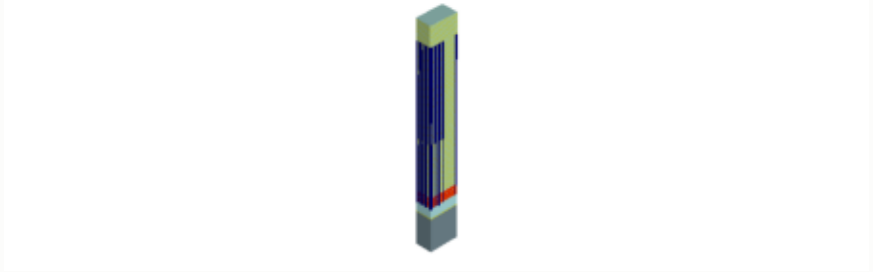

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

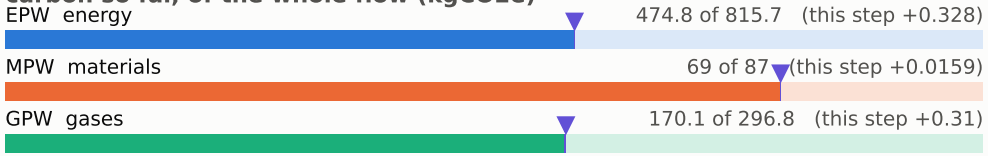

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

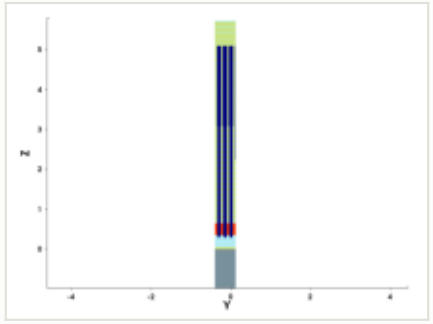

y cut at -0.150 µm

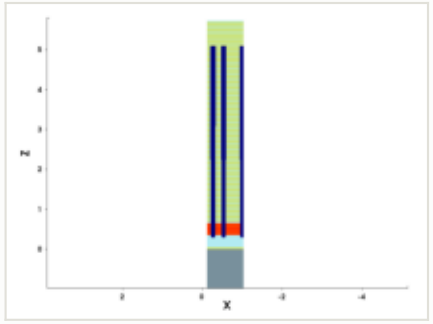

mask for this step

no mask for this step

steps by process area

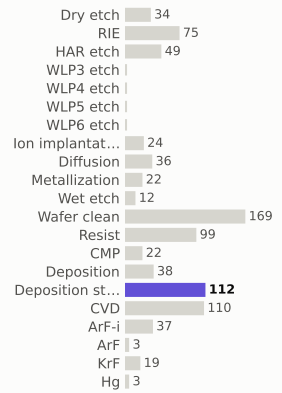

materials deposited (g)

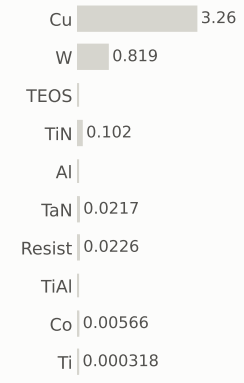

gases emitted (g)

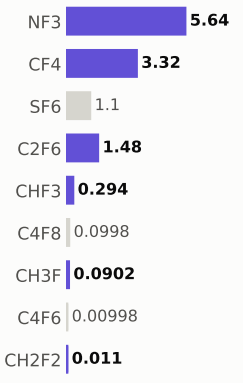

Step #16940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	714.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

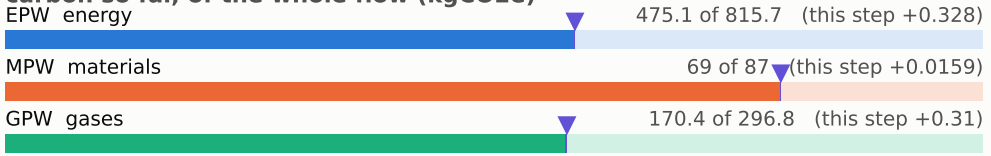

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

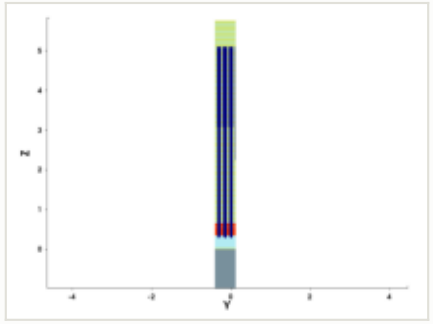

y cut at -0.150 µm

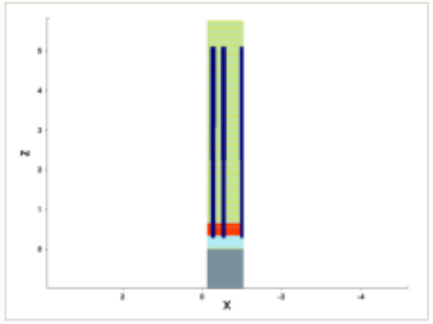

mask for this step

no mask for this step

steps by process area

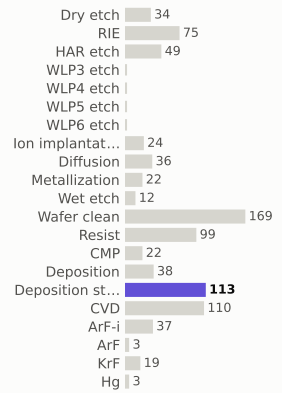

materials deposited (g)

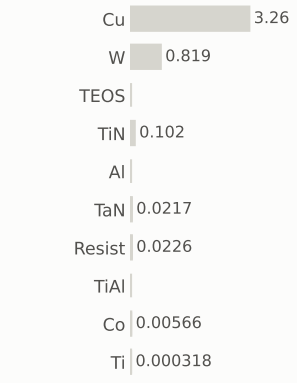

gases emitted (g)

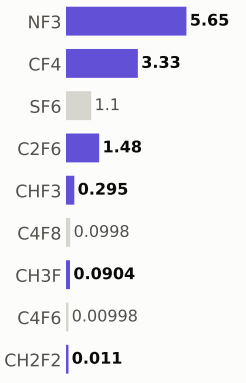

Step #16950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	715.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

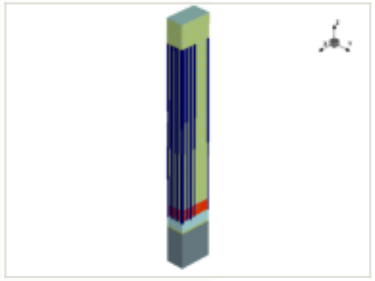

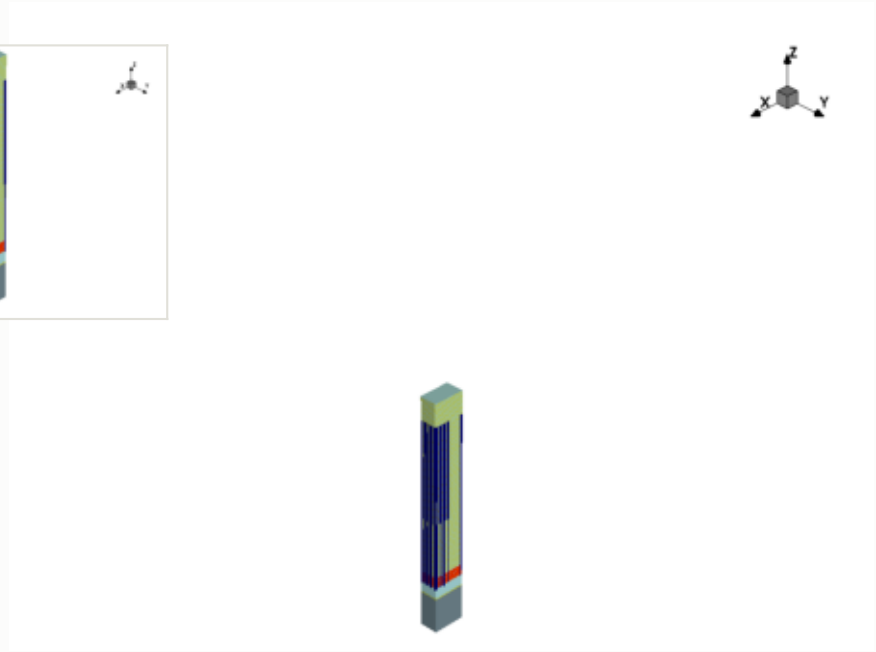

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

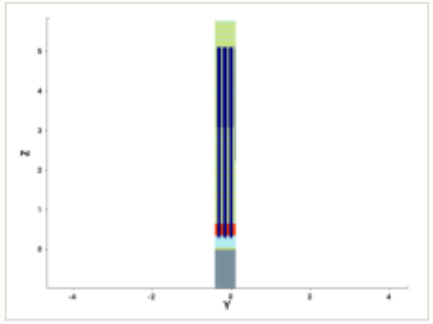

y cut at -0.150 µm

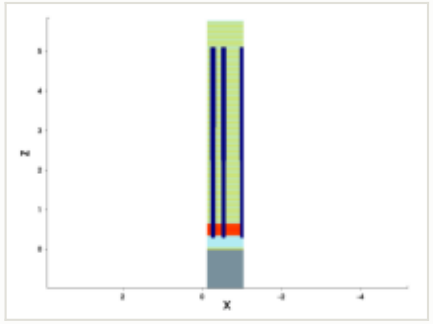

mask for this step

no mask for this step

steps by process area

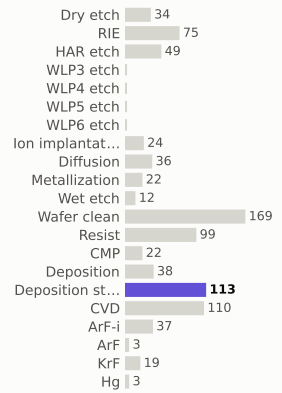

materials deposited (g)

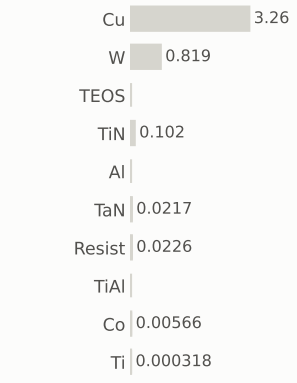

gases emitted (g)

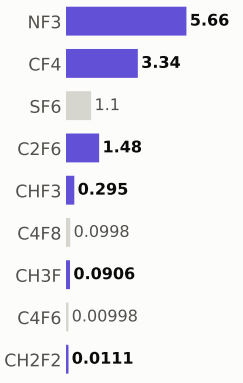

Step #16960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	715.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

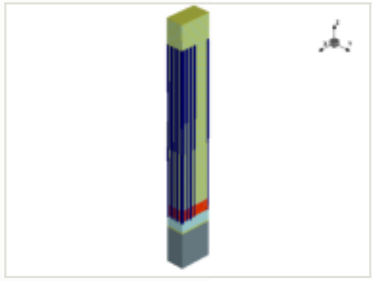

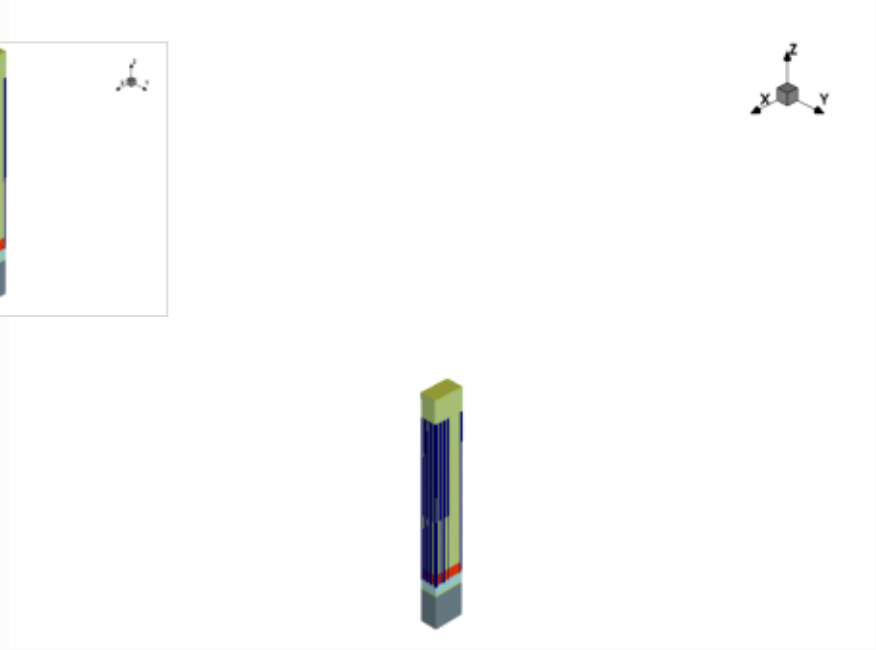

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

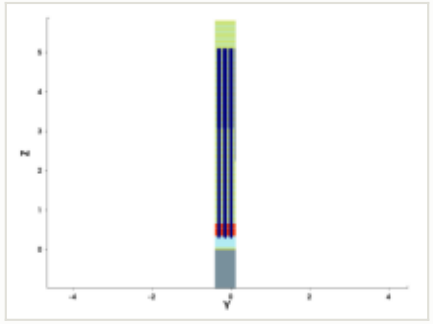

y cut at -0.150 µm

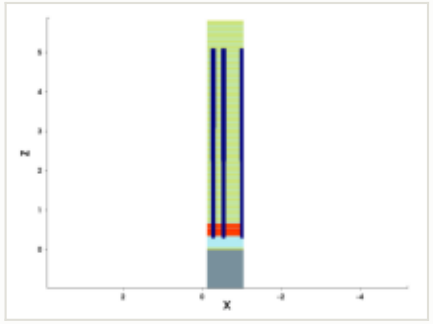

mask for this step

no mask for this step

steps by process area

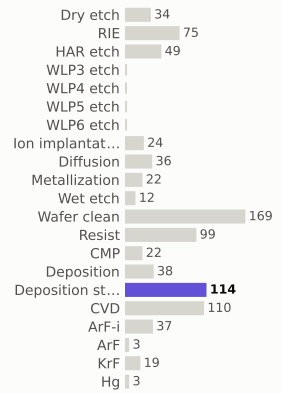

materials deposited (g)

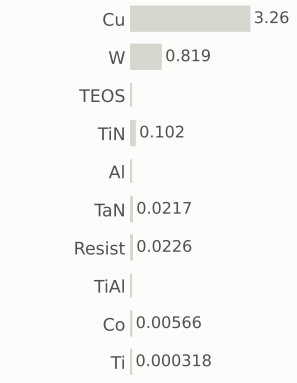

gases emitted (g)

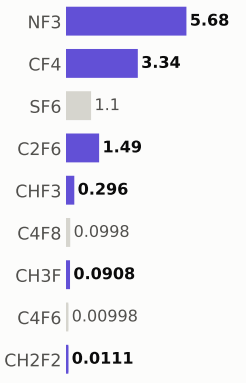

Step #16970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	716.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

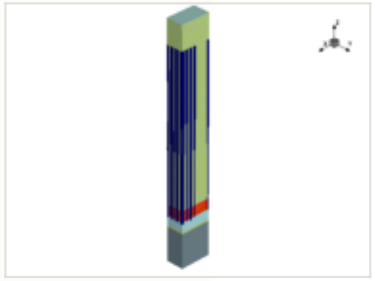

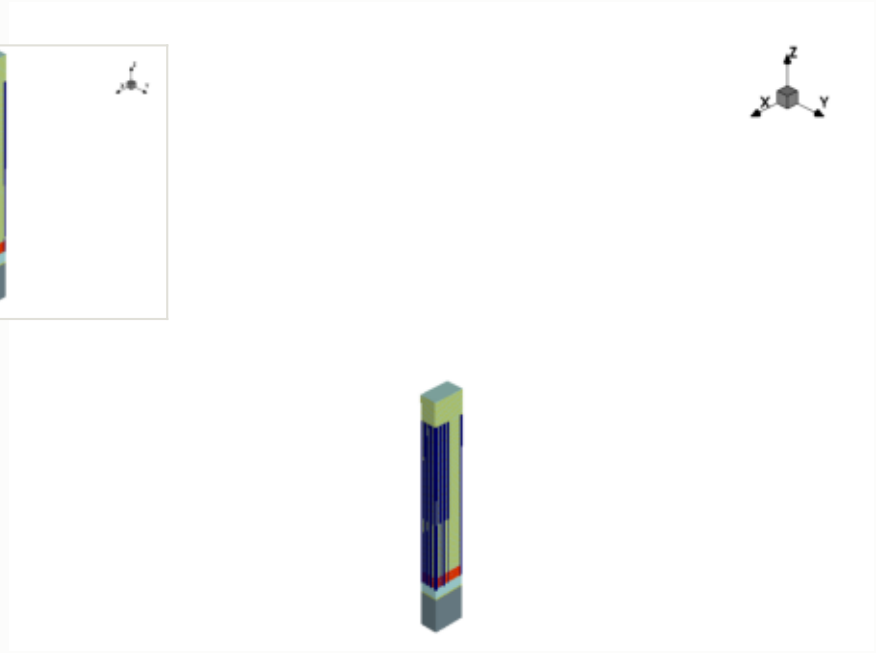

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

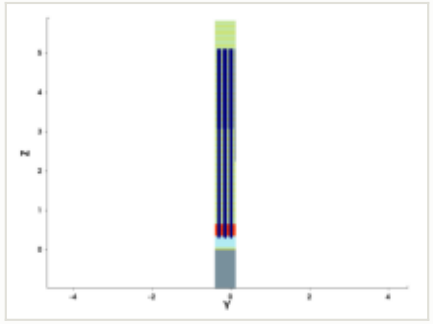

y cut at -0.150 µm

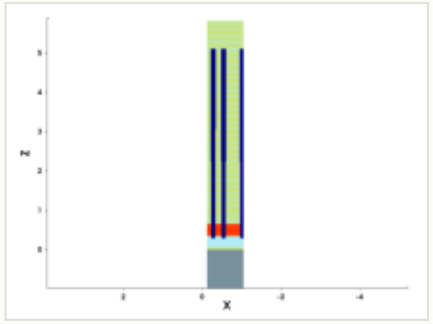

mask for this step

no mask for this step

steps by process area

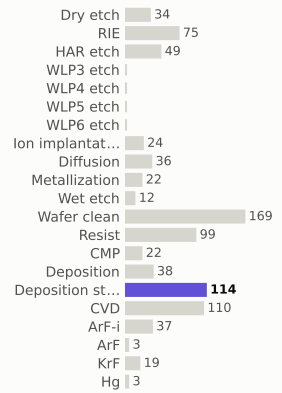

materials deposited (g)

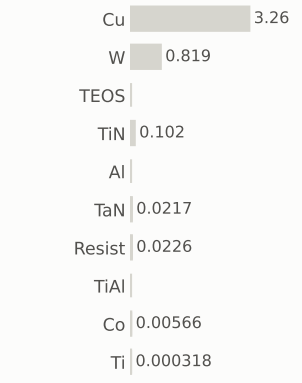

gases emitted (g)

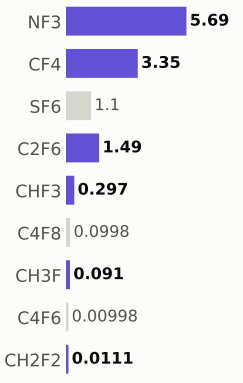

Step #16980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	717.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

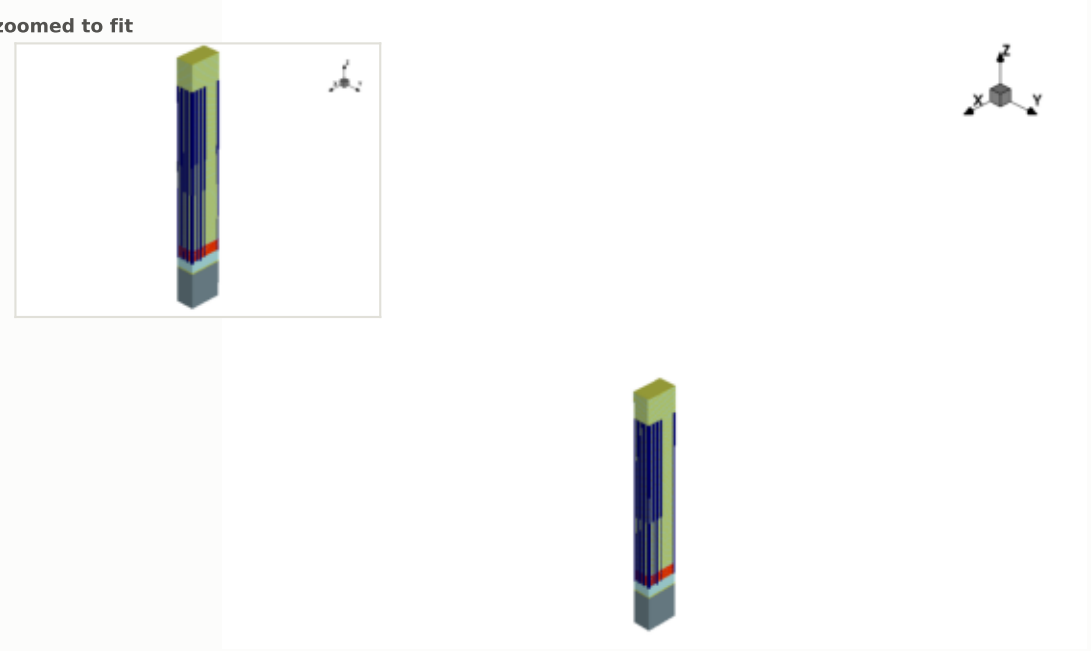

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

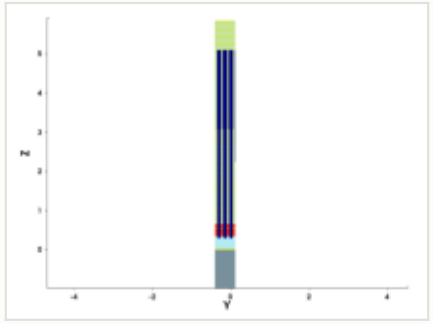

y cut at -0.150 µm

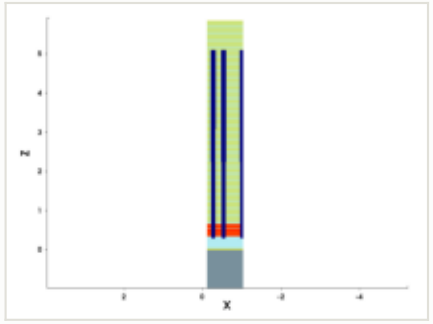

mask for this step

no mask for this step

steps by process area

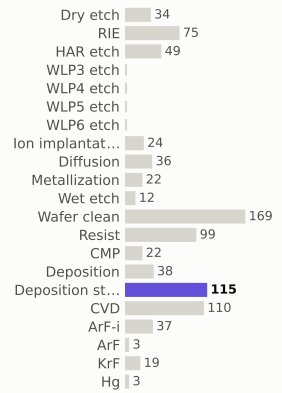

materials deposited (g)

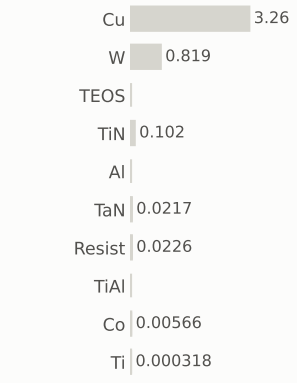

gases emitted (g)

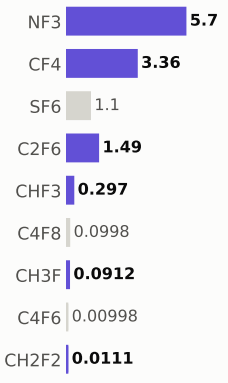

Step #16990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	717.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

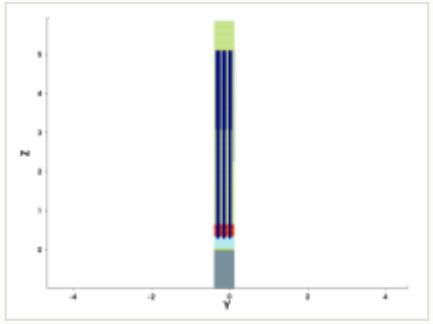

y cut at -0.150 µm

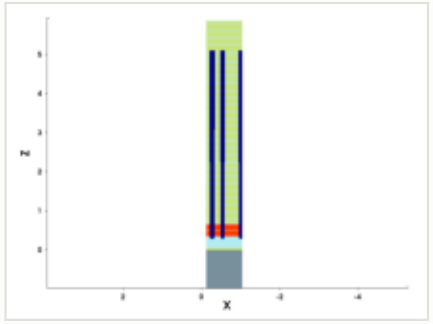

mask for this step

no mask for this step

steps by process area

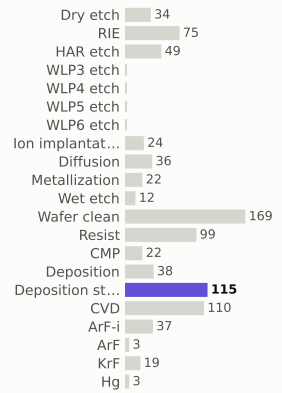

materials deposited (g)

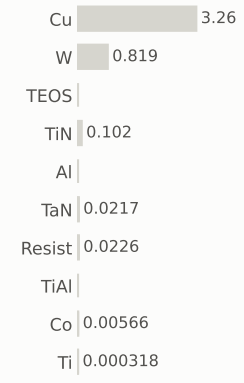

gases emitted (g)

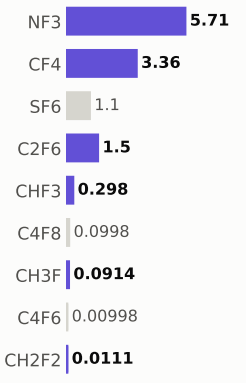

Step #17000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	718.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

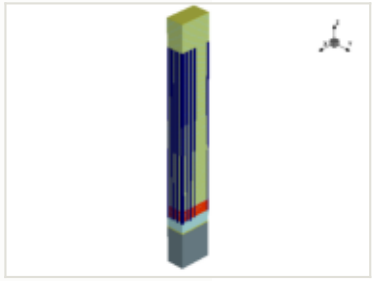

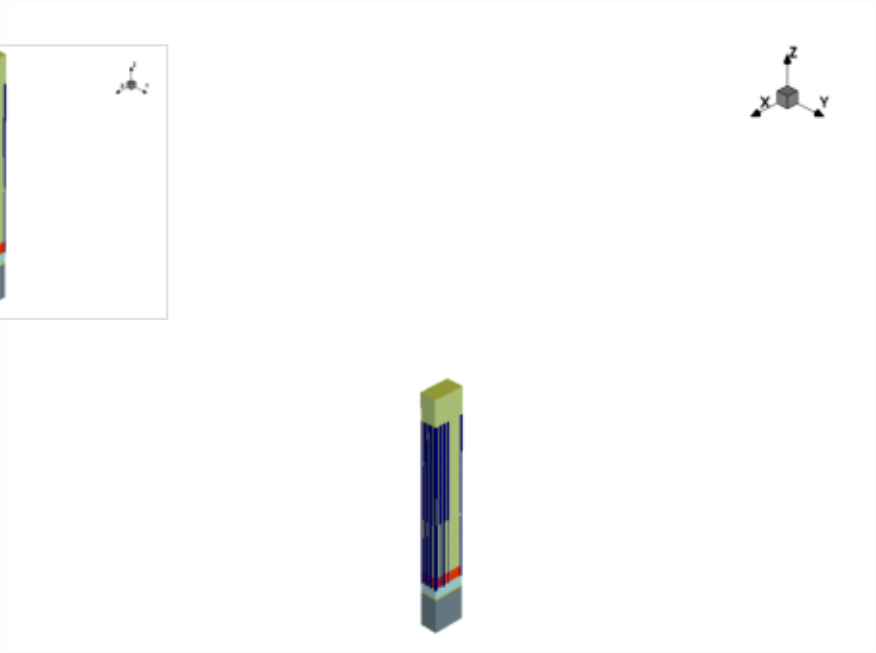

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

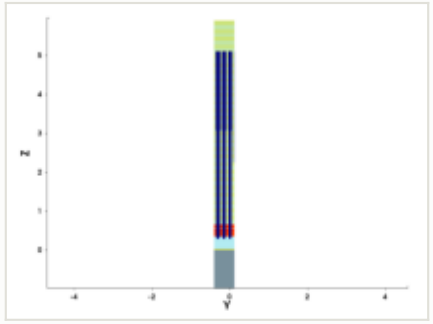

y cut at -0.150 µm

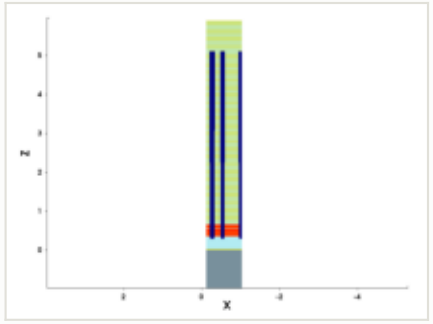

mask for this step

no mask for this step

steps by process area

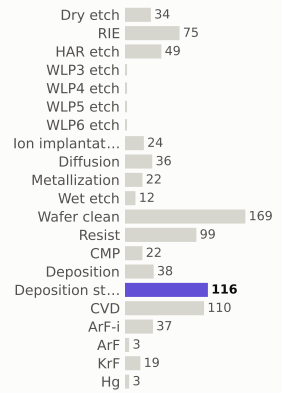

materials deposited (g)

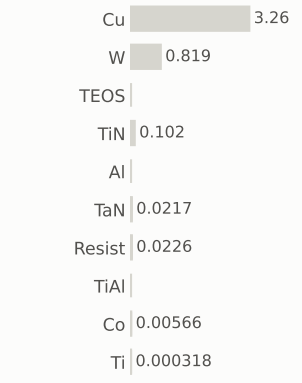

gases emitted (g)

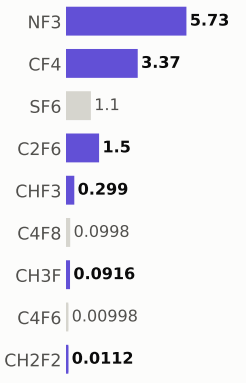

Step #17010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	719.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

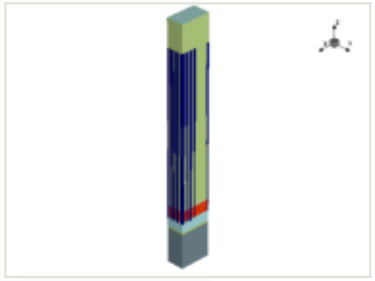

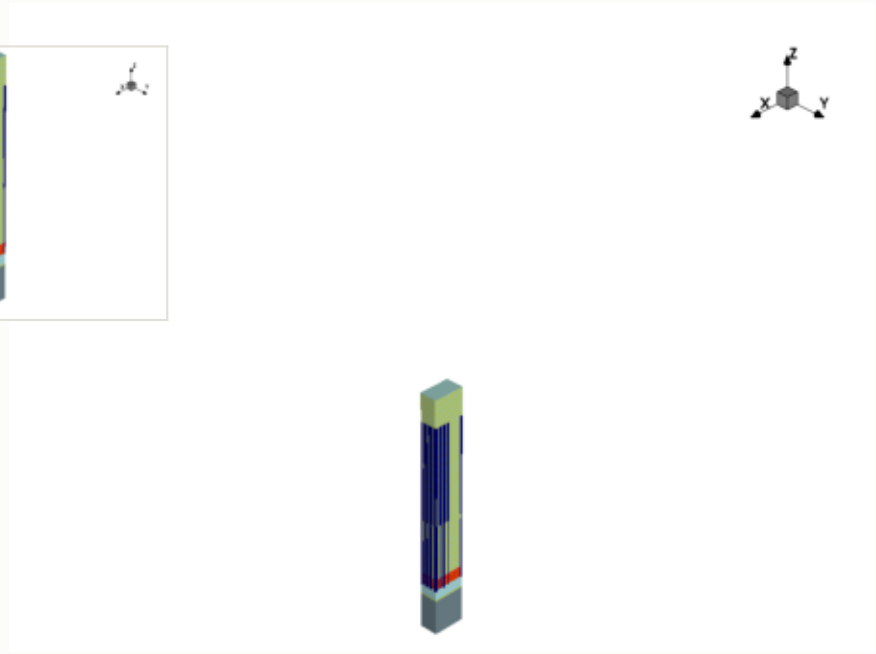

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

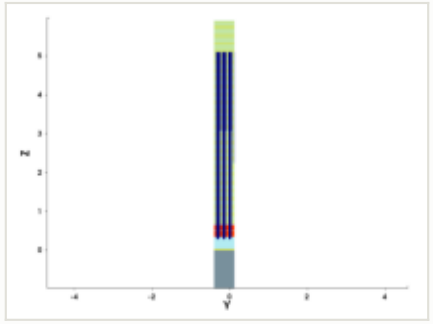

y cut at -0.150 µm

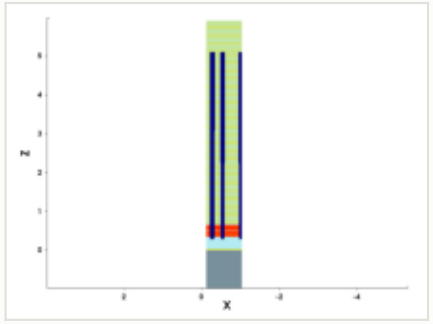

mask for this step

no mask for this step

steps by process area

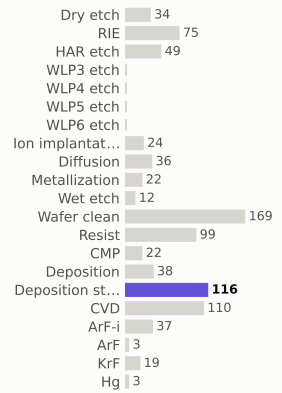

materials deposited (g)

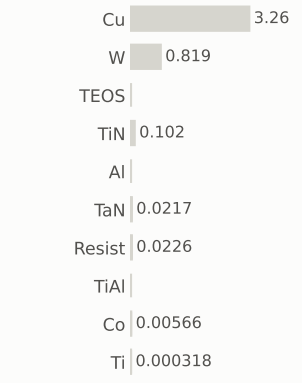

gases emitted (g)

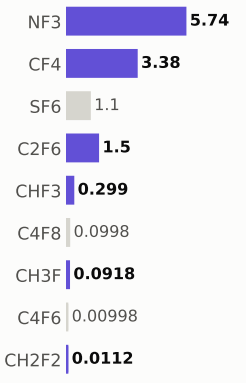

Step #17020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	719.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

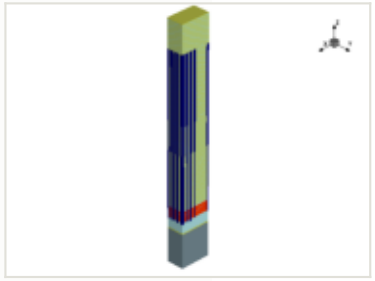

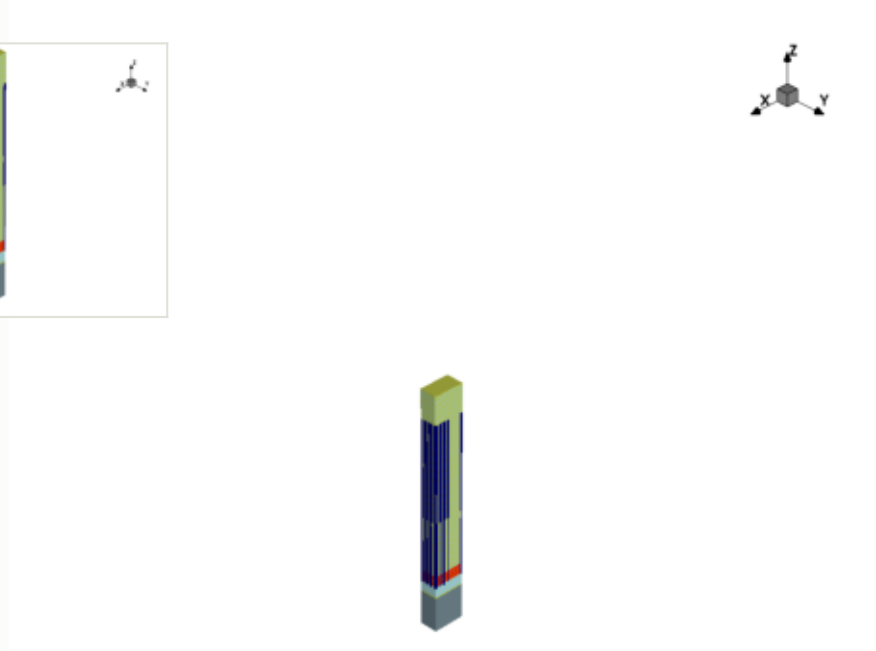

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

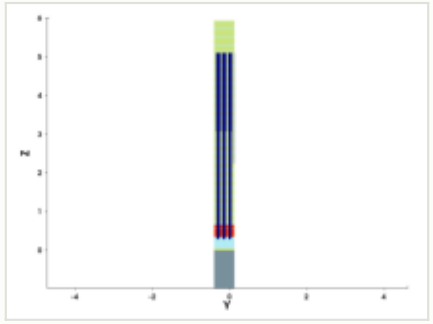

y cut at -0.150 µm

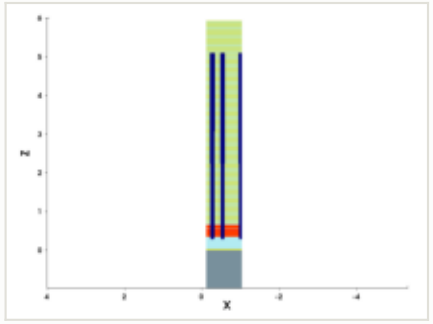

mask for this step

no mask for this step

steps by process area

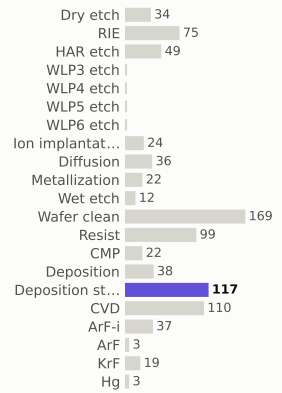

materials deposited (g)

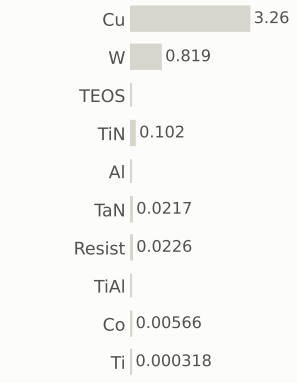

gases emitted (g)

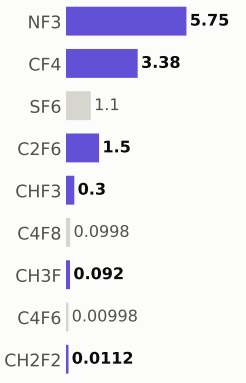

Step #17030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	720.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

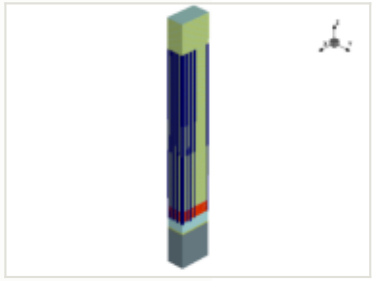

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

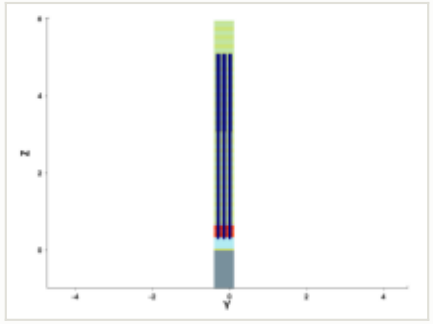

y cut at -0.150 µm

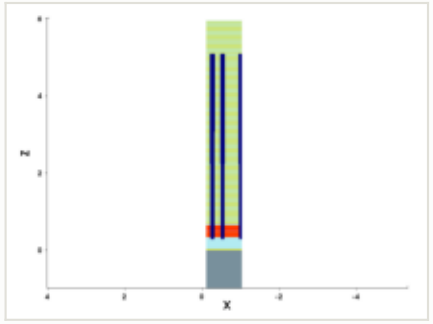

mask for this step

no mask for this step

steps by process area

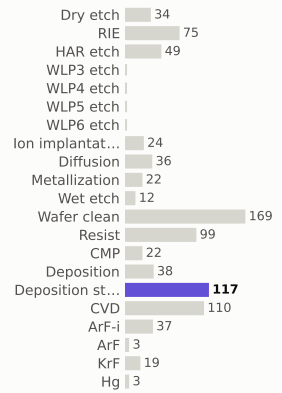

materials deposited (g)

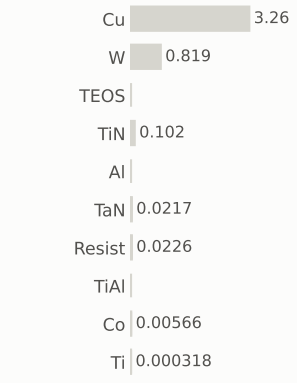

gases emitted (g)

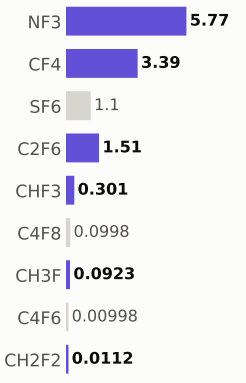

Step #17040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	721.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

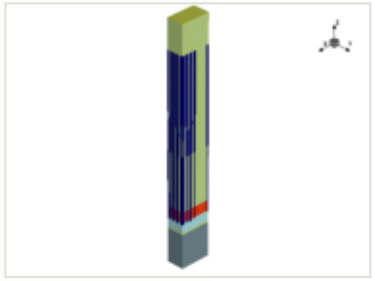

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

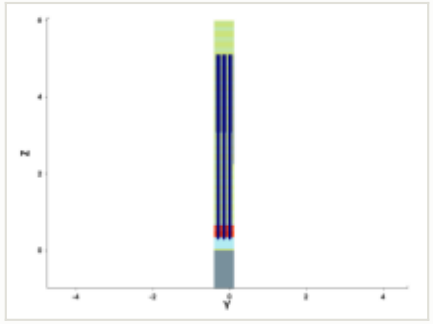

y cut at -0.150 µm

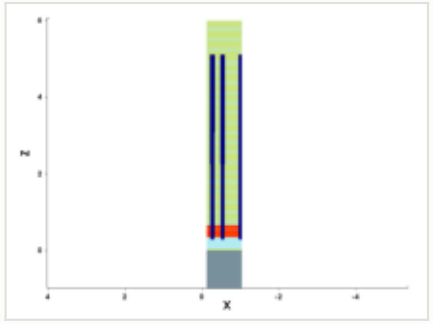

mask for this step

no mask for this step

steps by process area

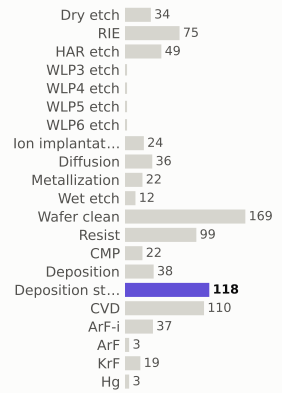

materials deposited (g)

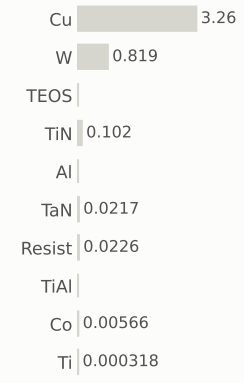

gases emitted (g)

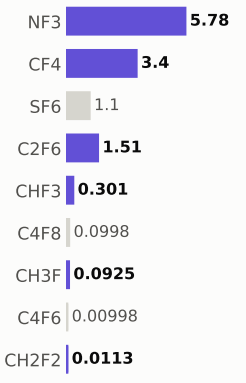

Step #17050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	721.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

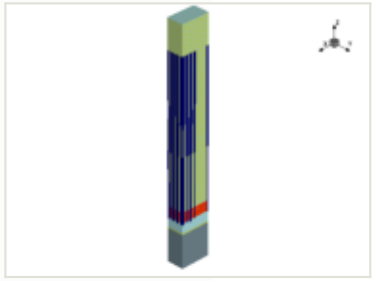

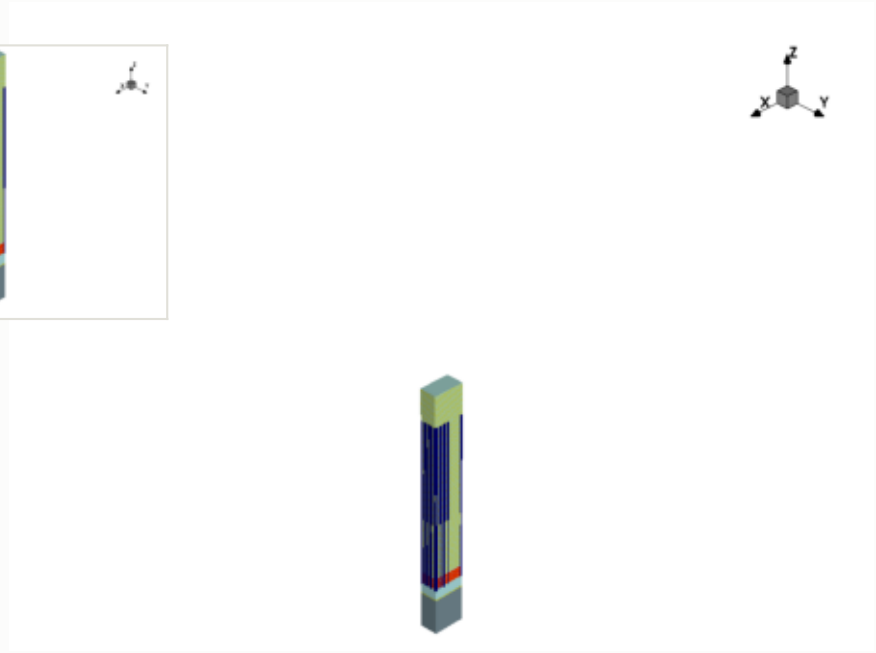

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

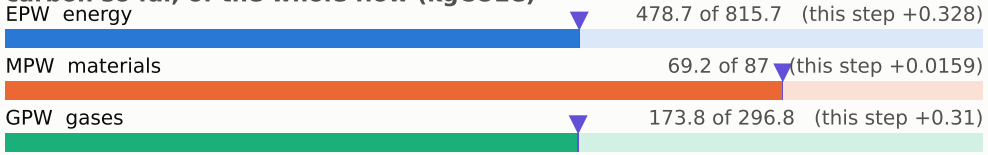

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

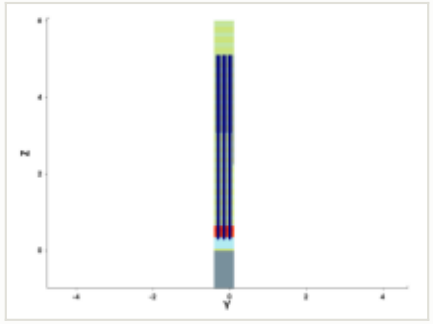

y cut at -0.150 µm

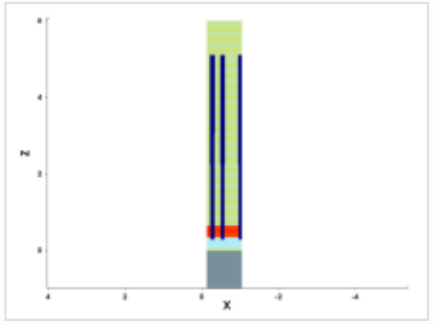

mask for this step

no mask for this step

steps by process area

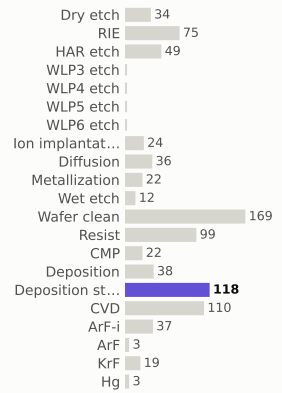

materials deposited (g)

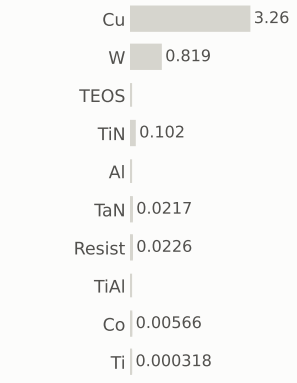

gases emitted (g)

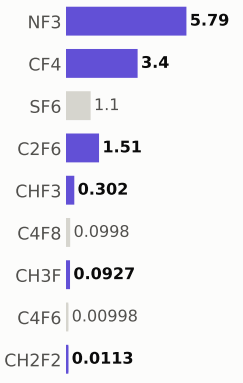

Step #17060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	722.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

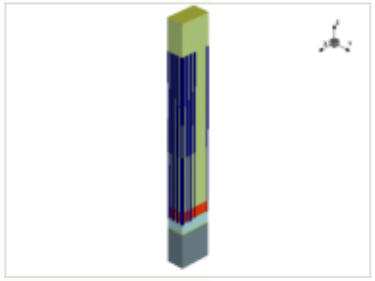

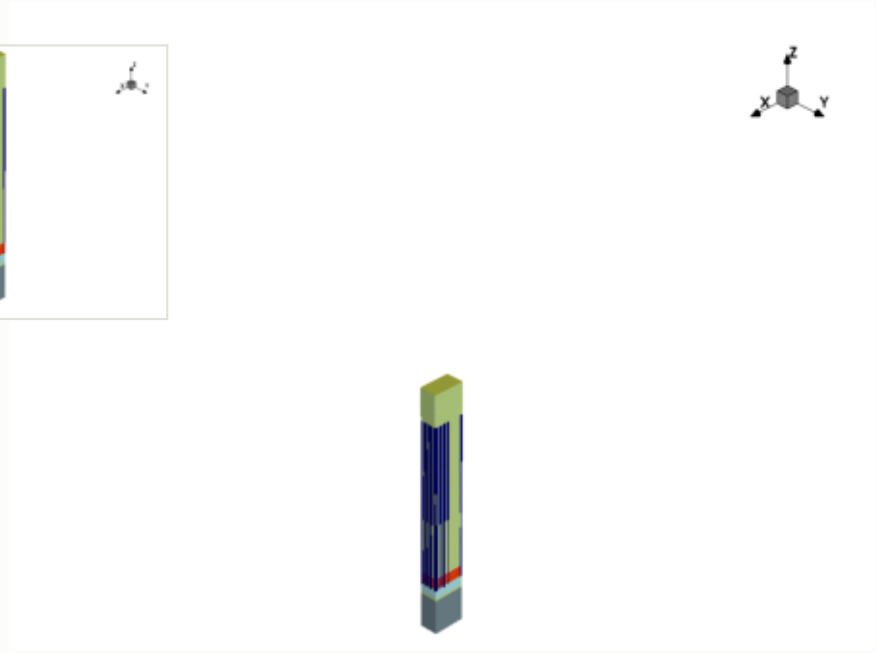

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

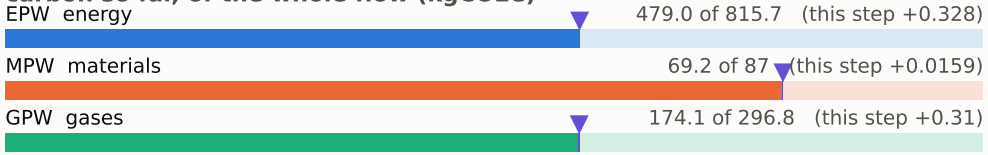

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

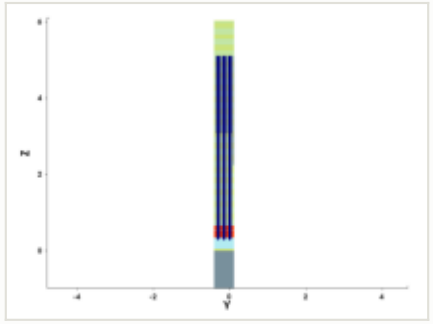

y cut at -0.150 µm

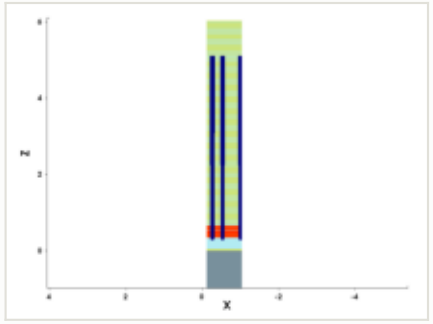

mask for this step

no mask for this step

steps by process area

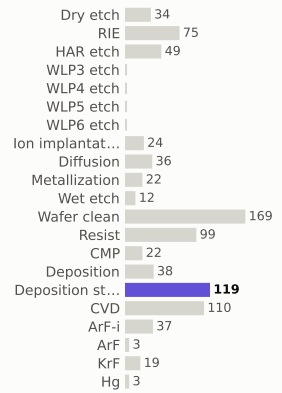

materials deposited (g)

gases emitted (g)

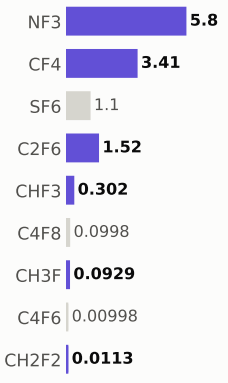

Step #17070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	723.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

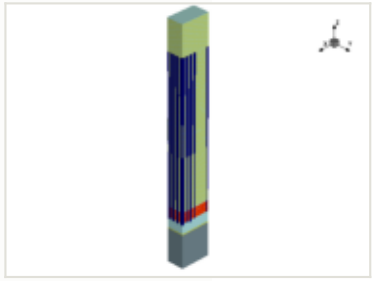

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

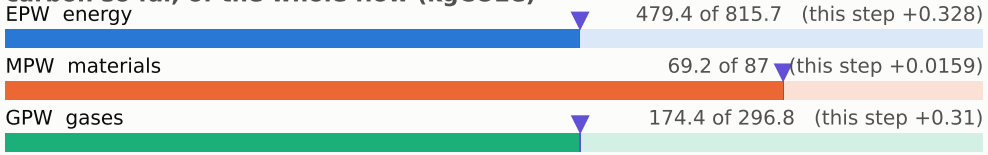

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

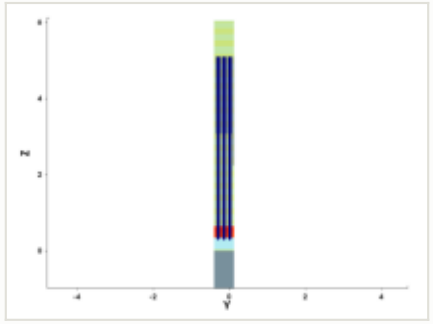

y cut at -0.150 µm

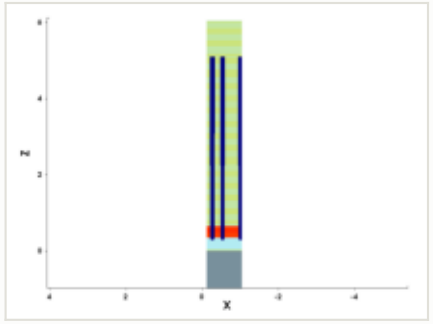

mask for this step

no mask for this step

steps by process area

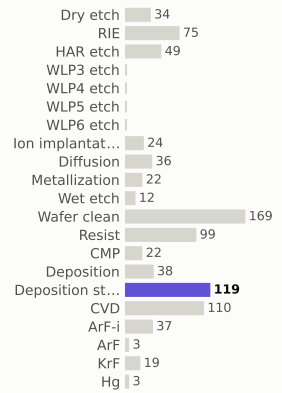

materials deposited (g)

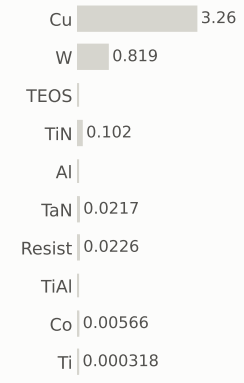

gases emitted (g)

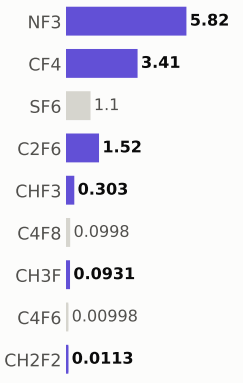

Step #17080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	723.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

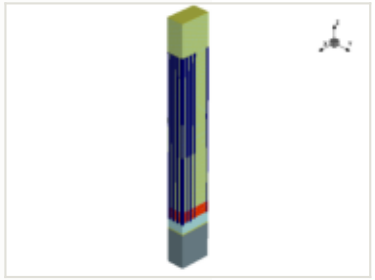

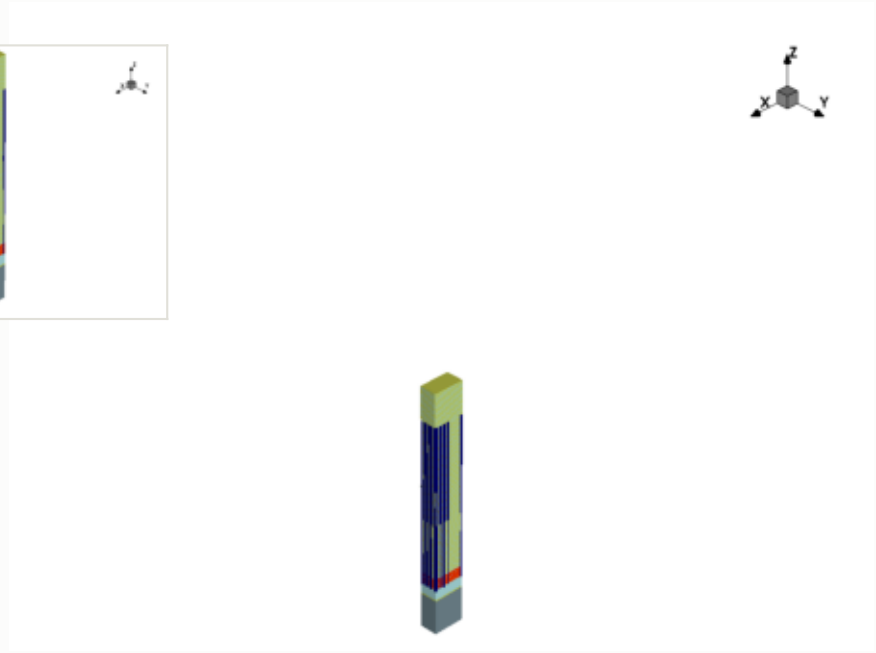

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

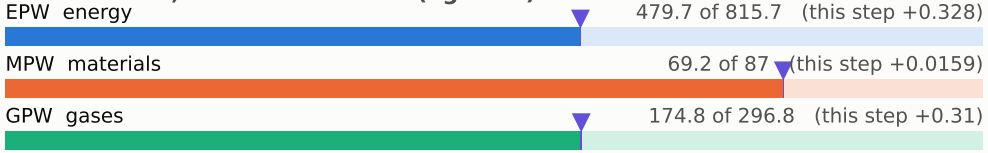

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

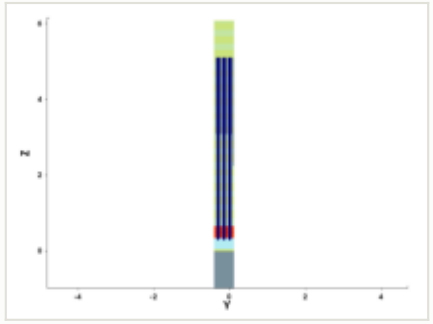

y cut at -0.150 µm

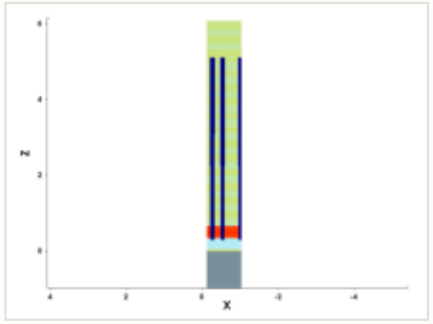

mask for this step

no mask for this step

steps by process area

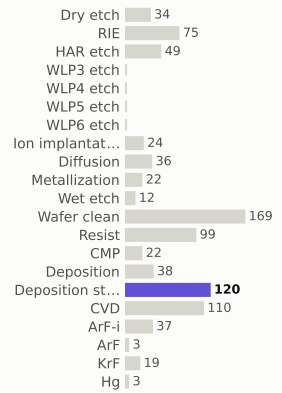

materials deposited (g)

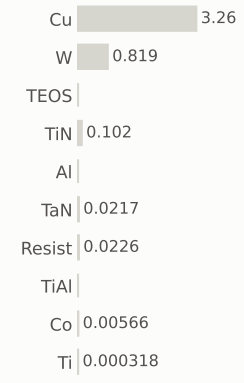

gases emitted (g)

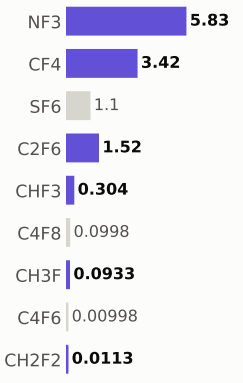

Step #17090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	724.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

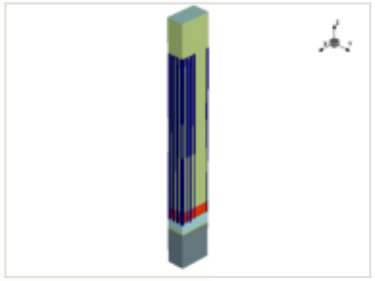

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

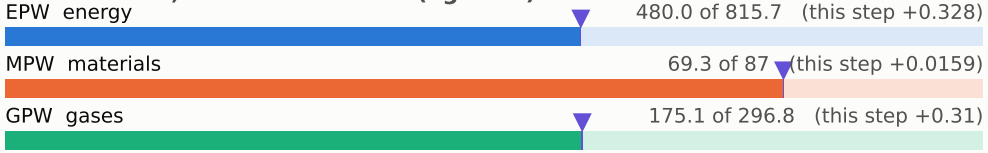

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

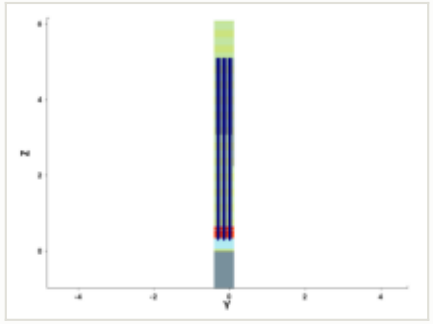

y cut at -0.150 µm

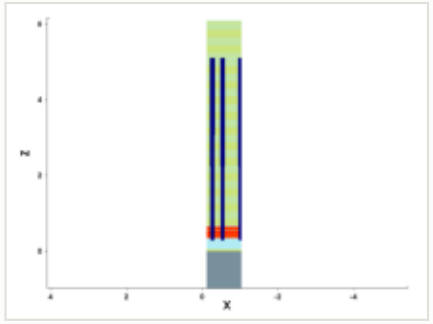

mask for this step

no mask for this step

steps by process area

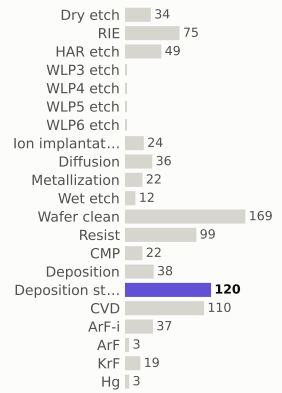

materials deposited (g)

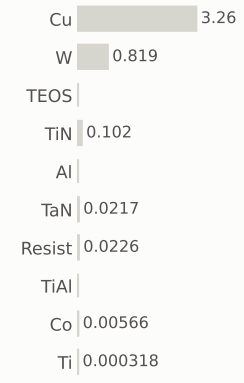

gases emitted (g)

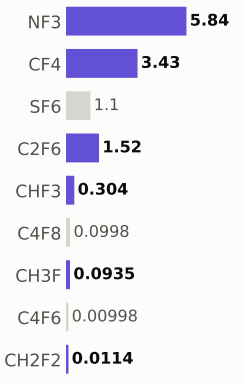

Step #17100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	725.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

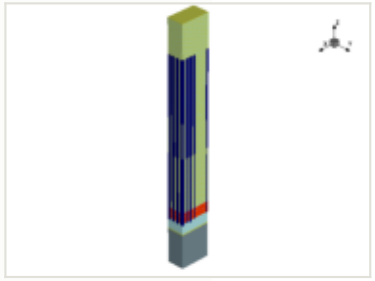

x cut at -0.570 µm

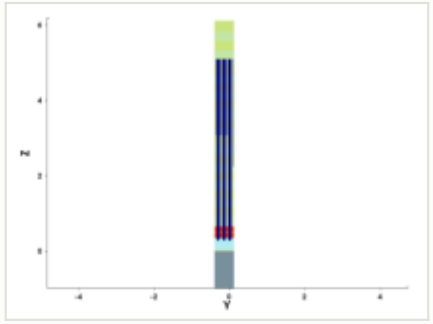

y cut at -0.150 µm

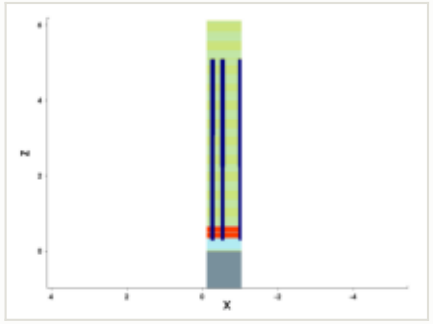

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

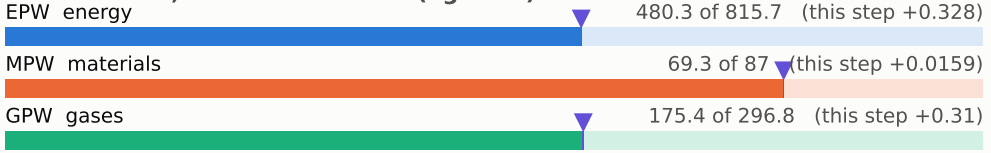

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

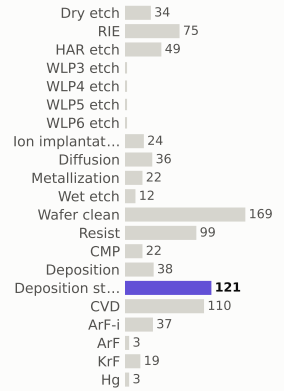

materials deposited (g)

gases emitted (g)

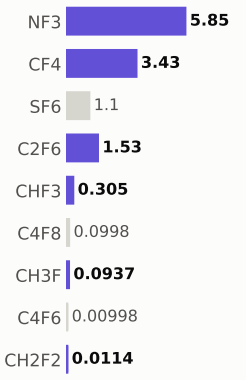

Step #17110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	725.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

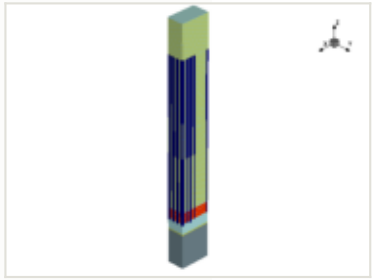

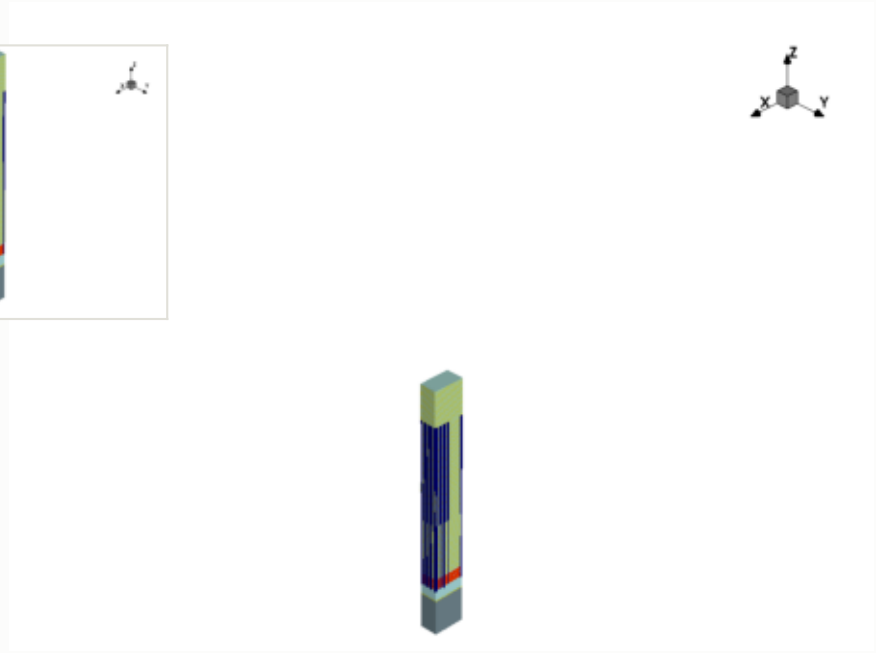

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

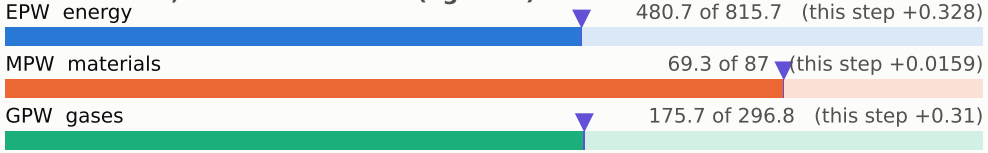

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

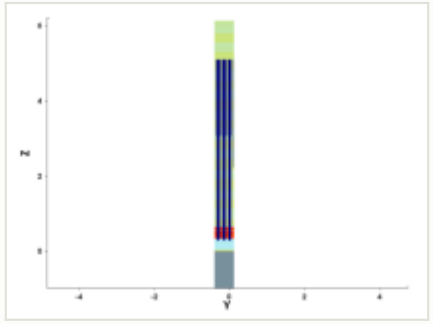

y cut at -0.150 µm

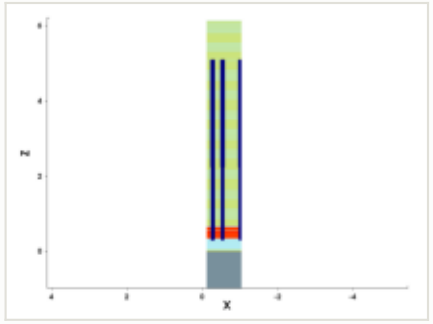

mask for this step

no mask for this step

steps by process area

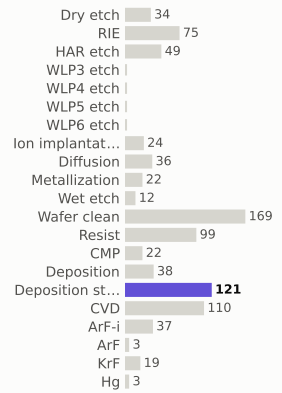

materials deposited (g)

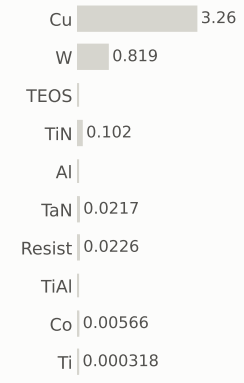

gases emitted (g)

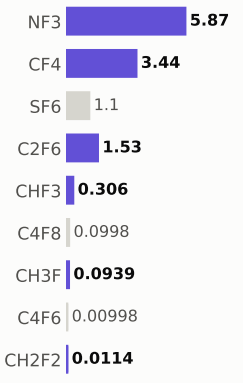

Step #17120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	726.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

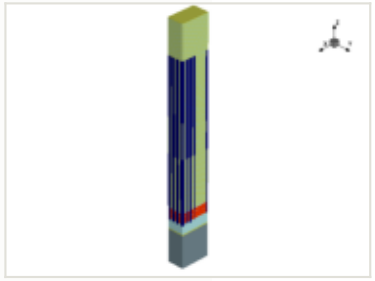

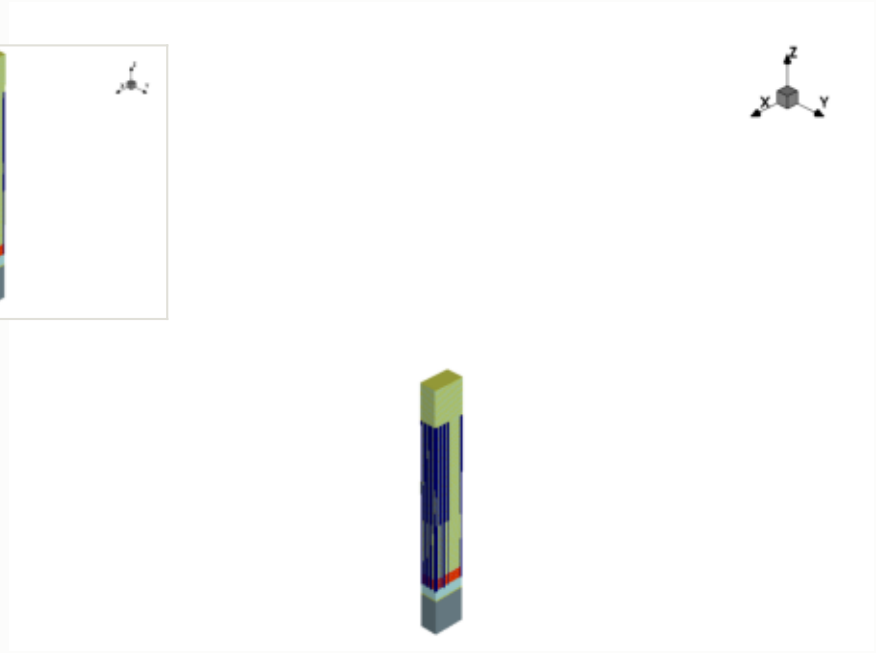

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

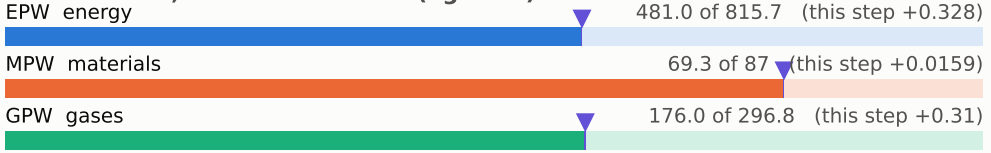

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

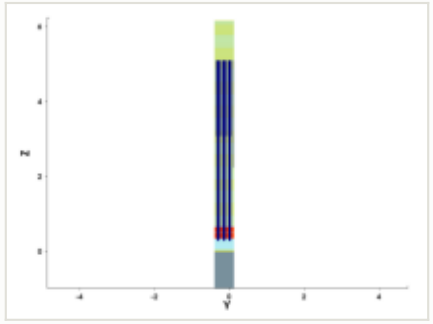

y cut at -0.150 µm

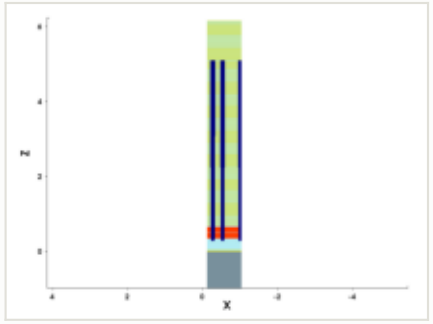

mask for this step

no mask for this step

steps by process area

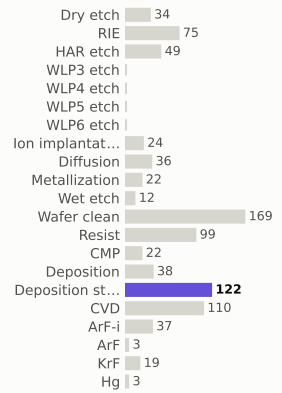

materials deposited (g)

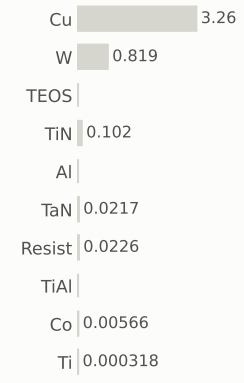

gases emitted (g)

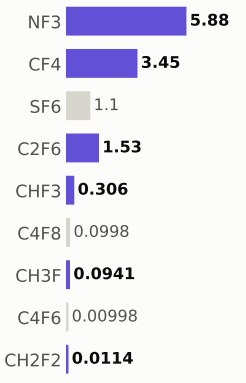

Step #17130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	727.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

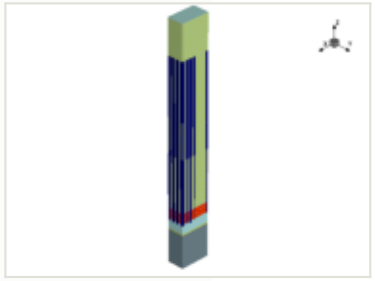

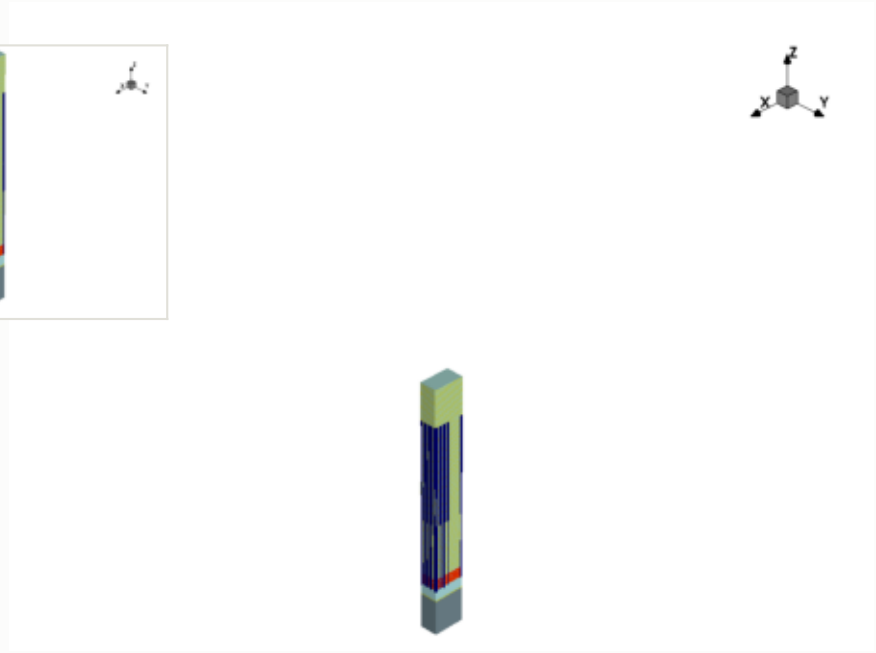

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

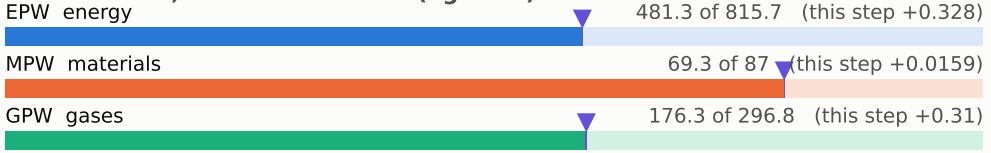

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

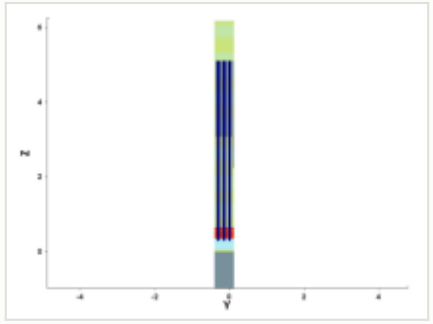

y cut at -0.150 µm

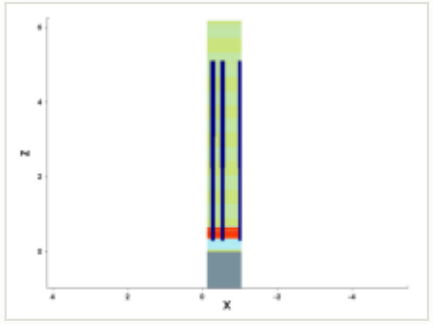

mask for this step

no mask for this step

steps by process area

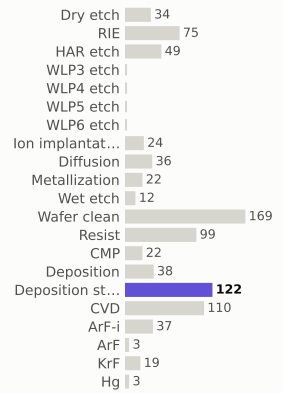

materials deposited (g)

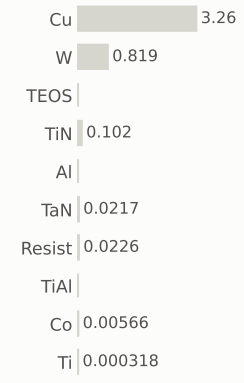

gases emitted (g)

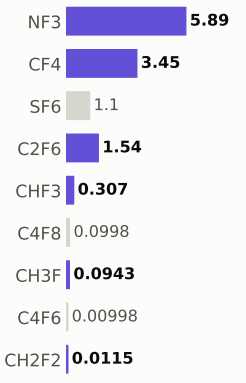

Step #17140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	727.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

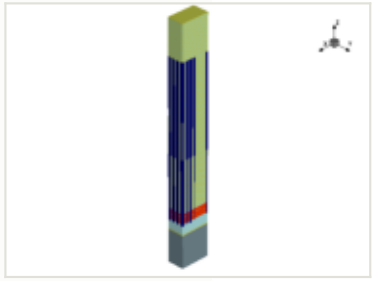

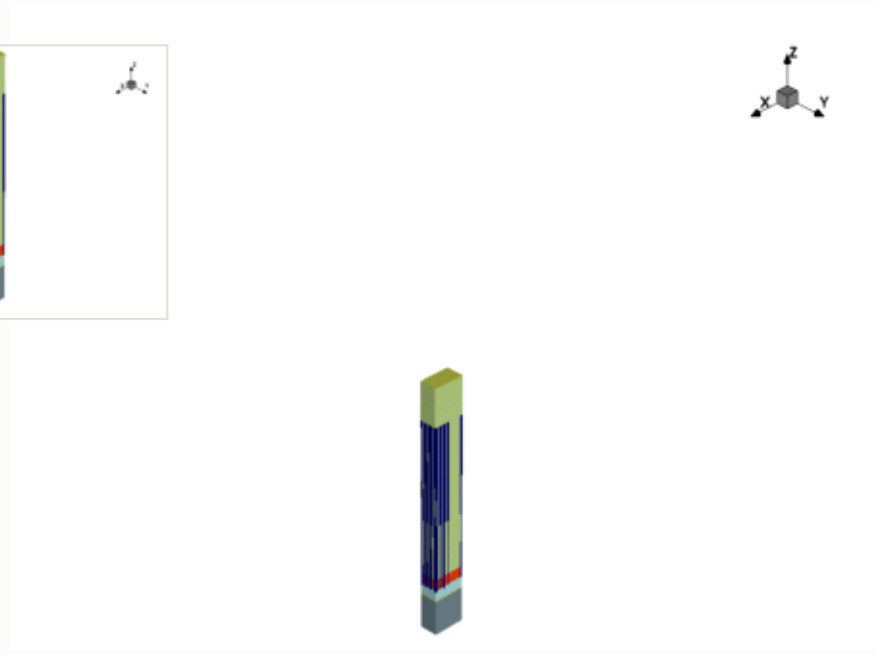

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

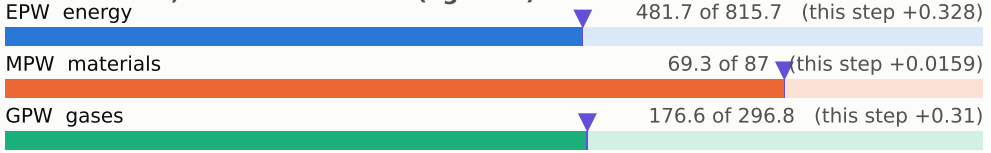

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

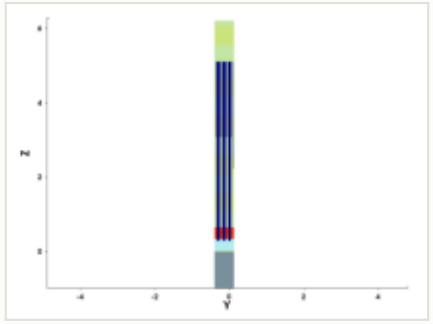

y cut at -0.150 µm

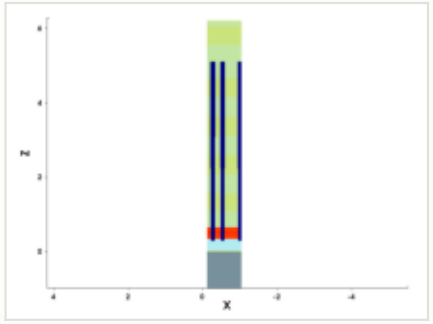

mask for this step

no mask for this step

steps by process area

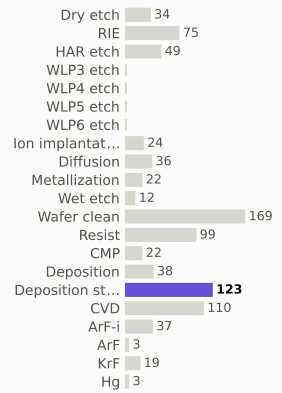

materials deposited (g)

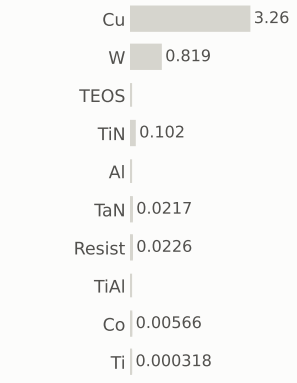

gases emitted (g)

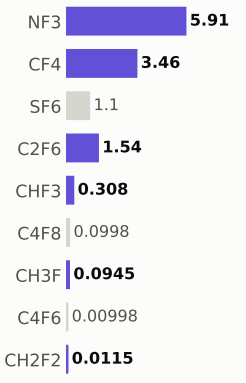

Step #17150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	728.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

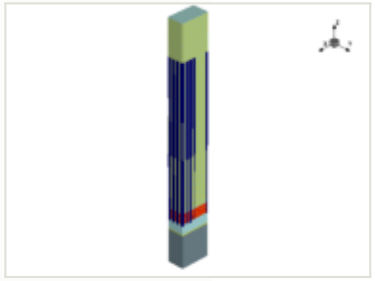

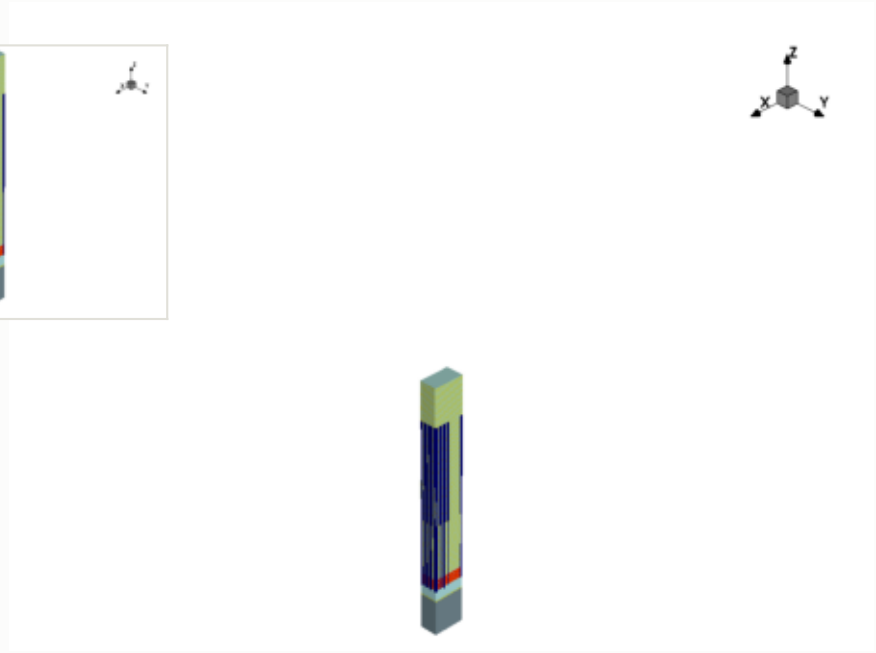

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

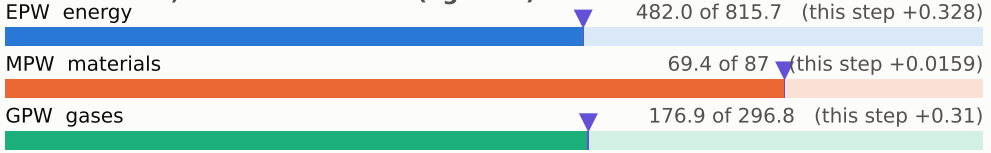

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

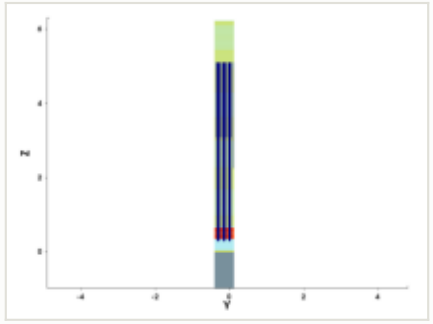

y cut at -0.150 µm

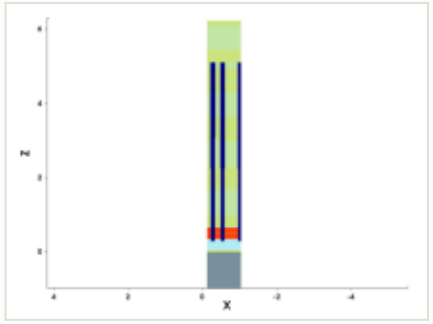

mask for this step

no mask for this step

steps by process area

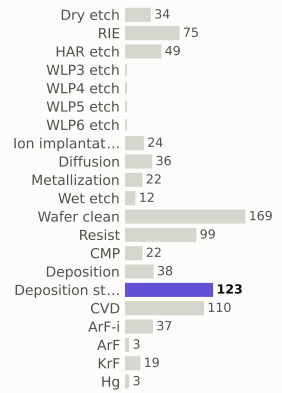

materials deposited (g)

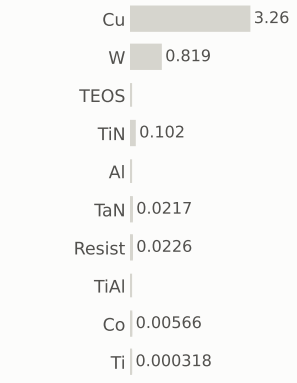

gases emitted (g)

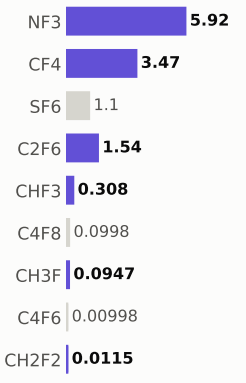

Step #17160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	728.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

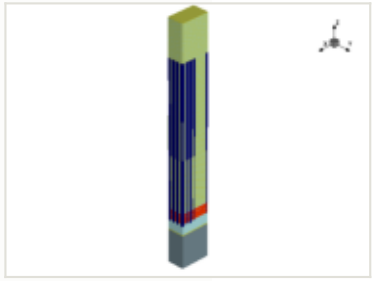

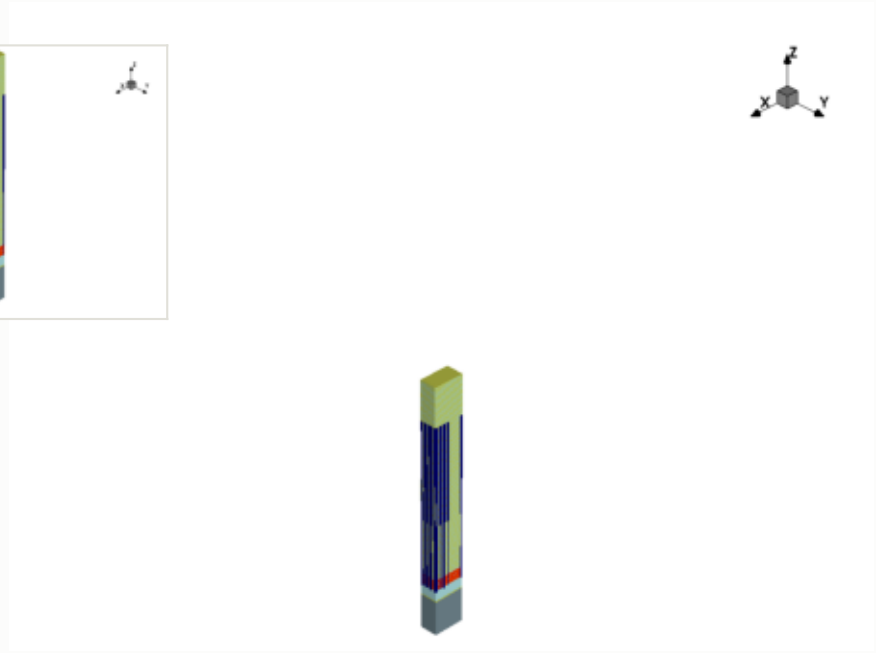

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

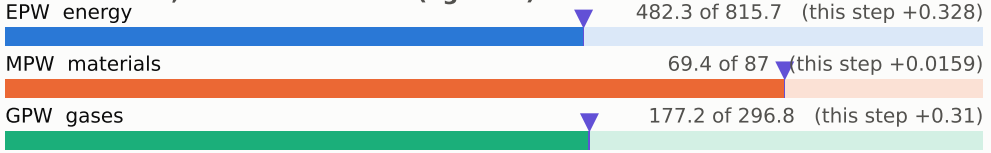

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

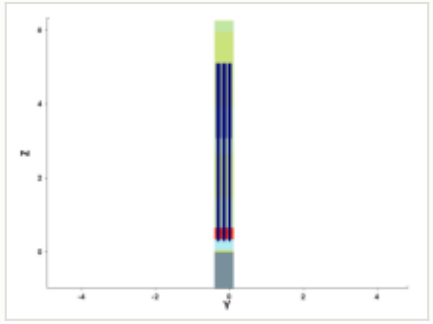

y cut at -0.150 µm

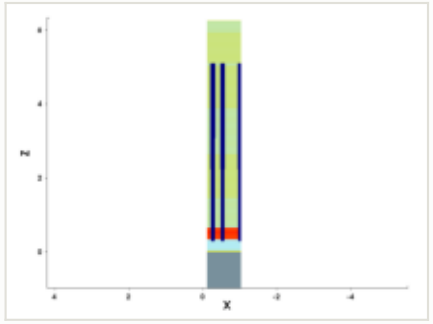

mask for this step

no mask for this step

steps by process area

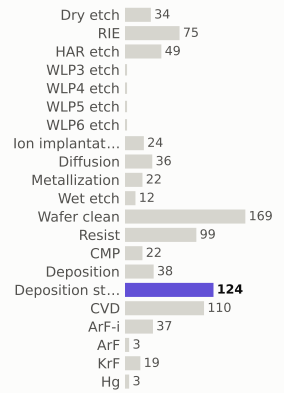

materials deposited (g)

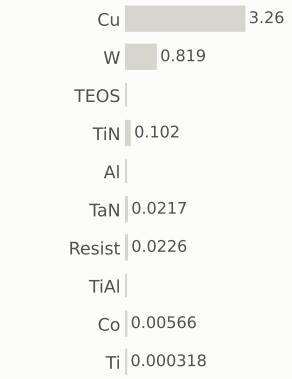

gases emitted (g)

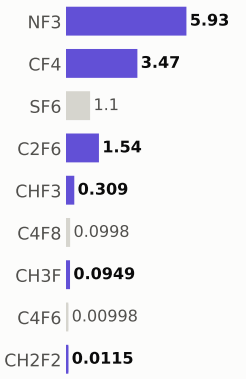

Step #17170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	729.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

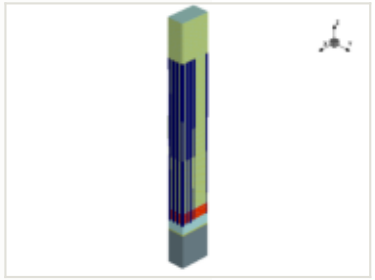

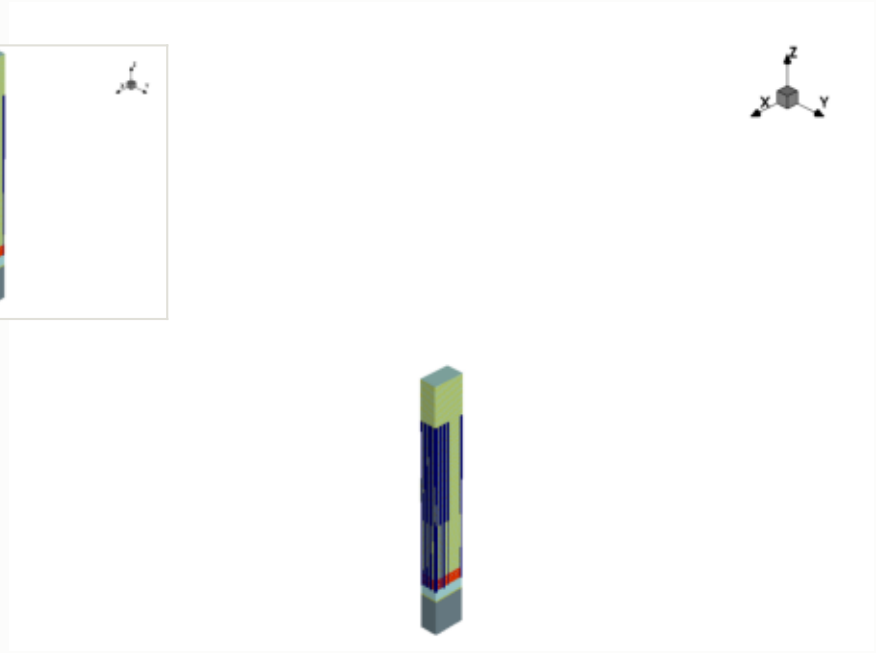

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

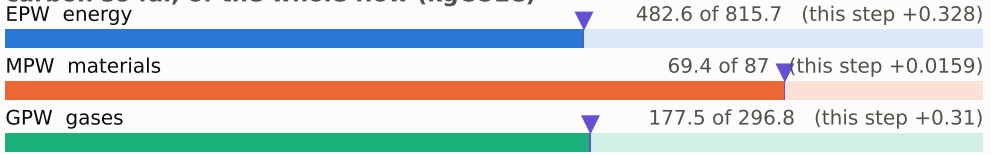

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

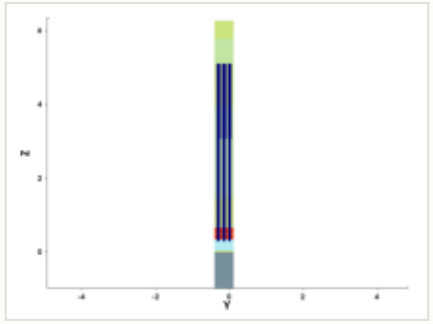

y cut at -0.150 µm

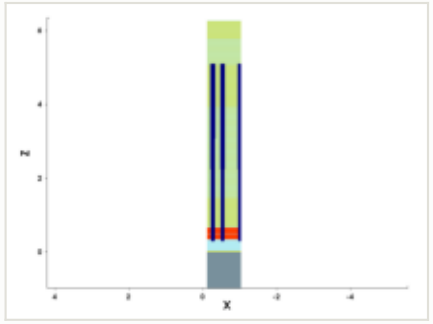

mask for this step

no mask for this step

steps by process area

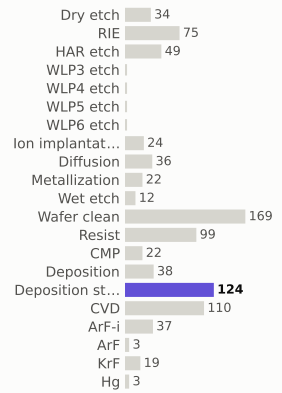

materials deposited (g)

gases emitted (g)

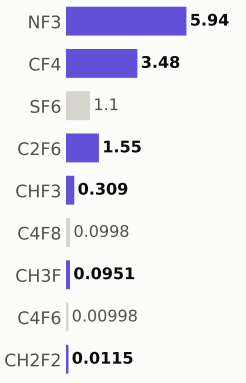

Step #17180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	730.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

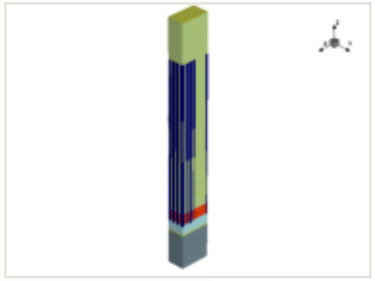

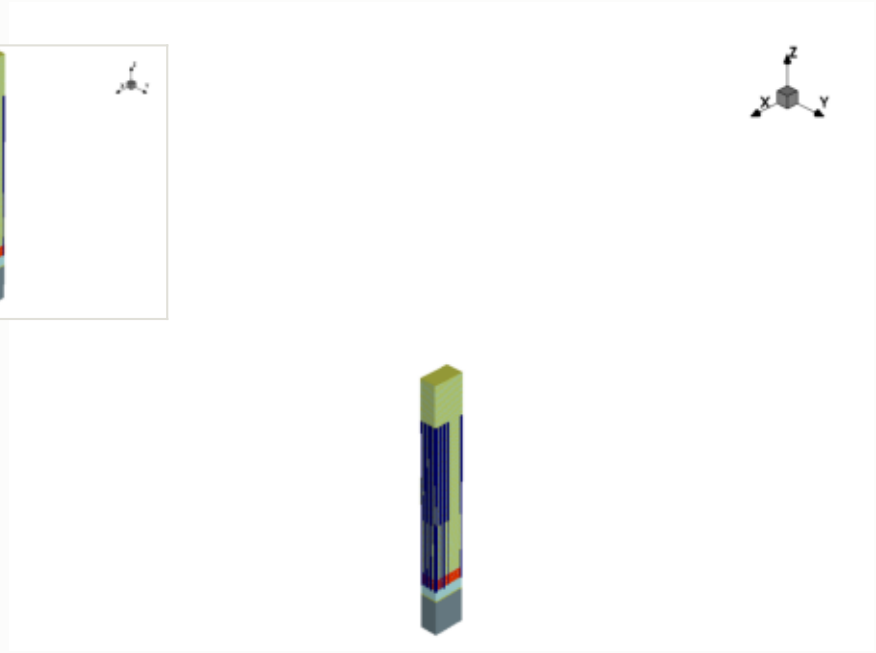

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

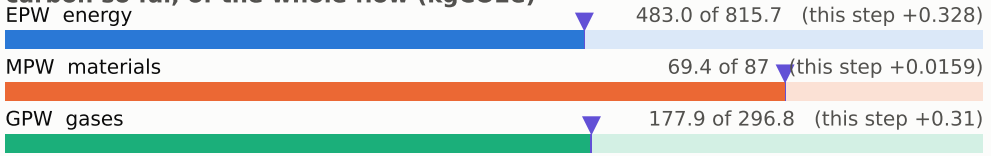

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

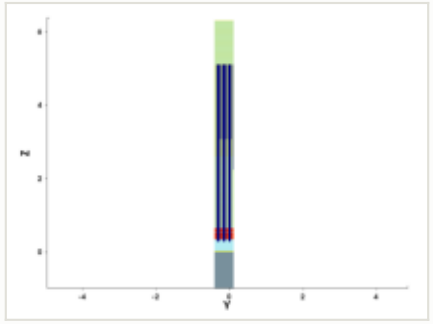

y cut at -0.150 µm

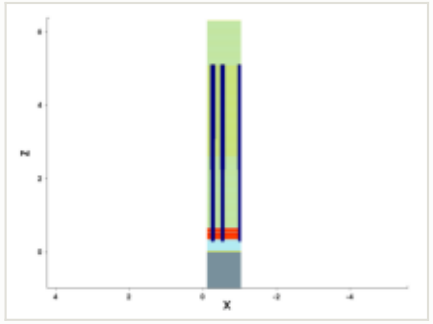

mask for this step

no mask for this step

steps by process area

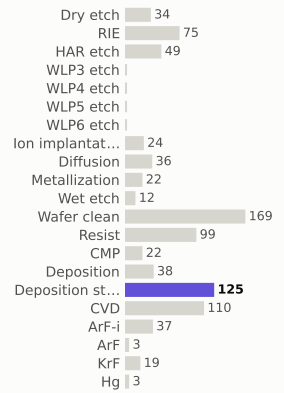

materials deposited (g)

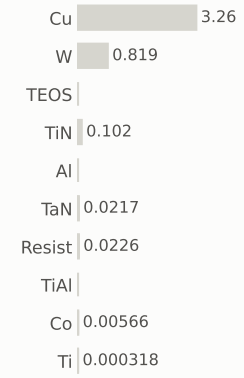

gases emitted (g)

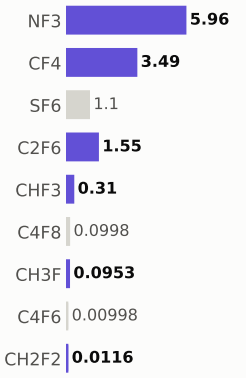

Step #17190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	730.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

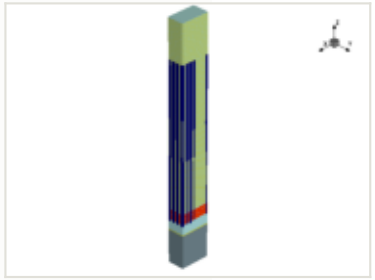

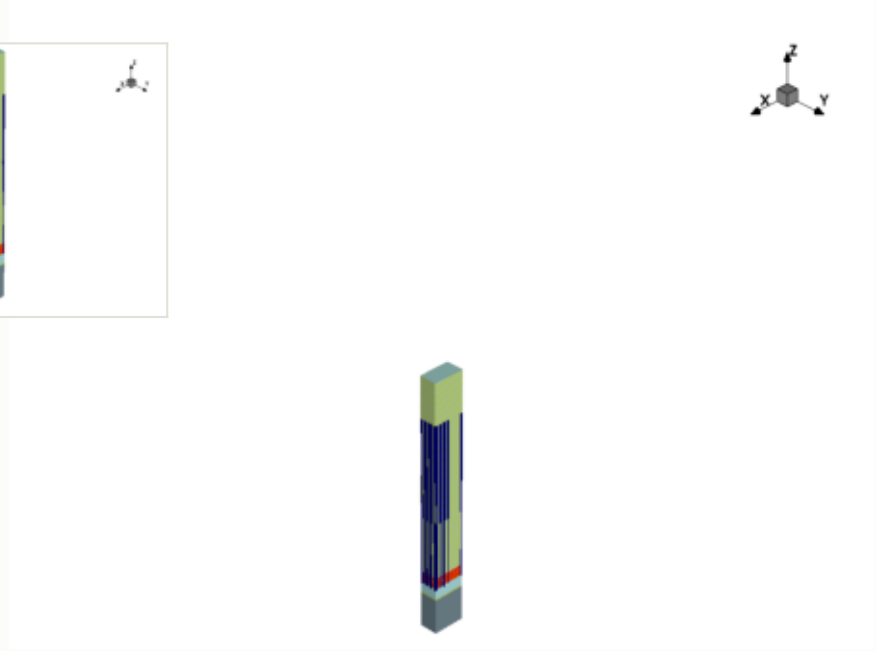

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

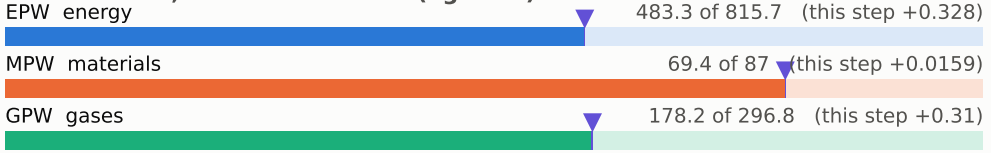

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

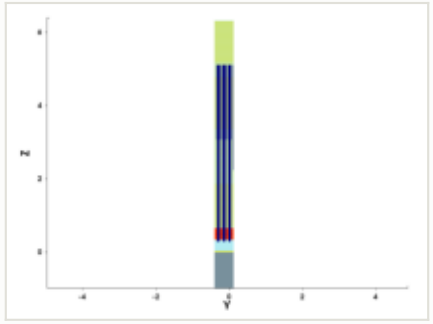

y cut at -0.150 µm

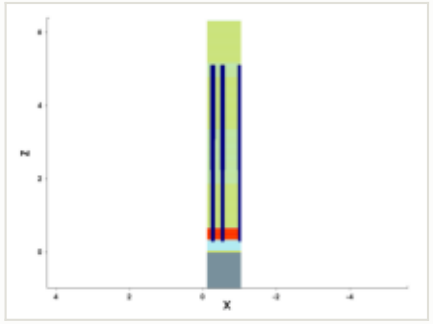

mask for this step

no mask for this step

steps by process area

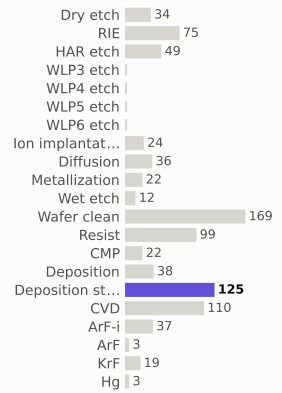

materials deposited (g)

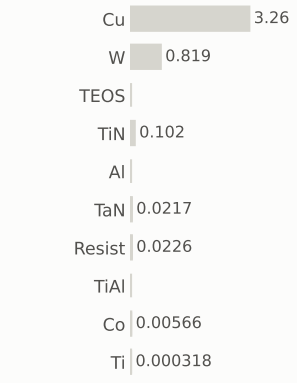

gases emitted (g)

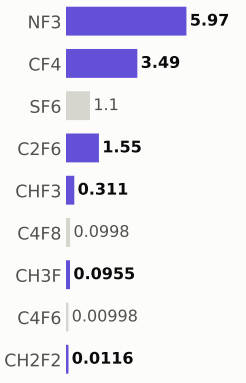

Step #17200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	731.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

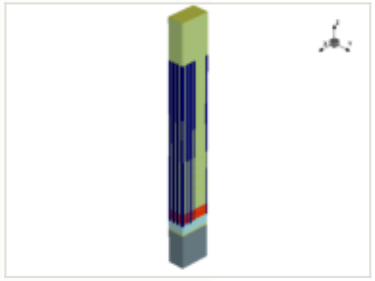

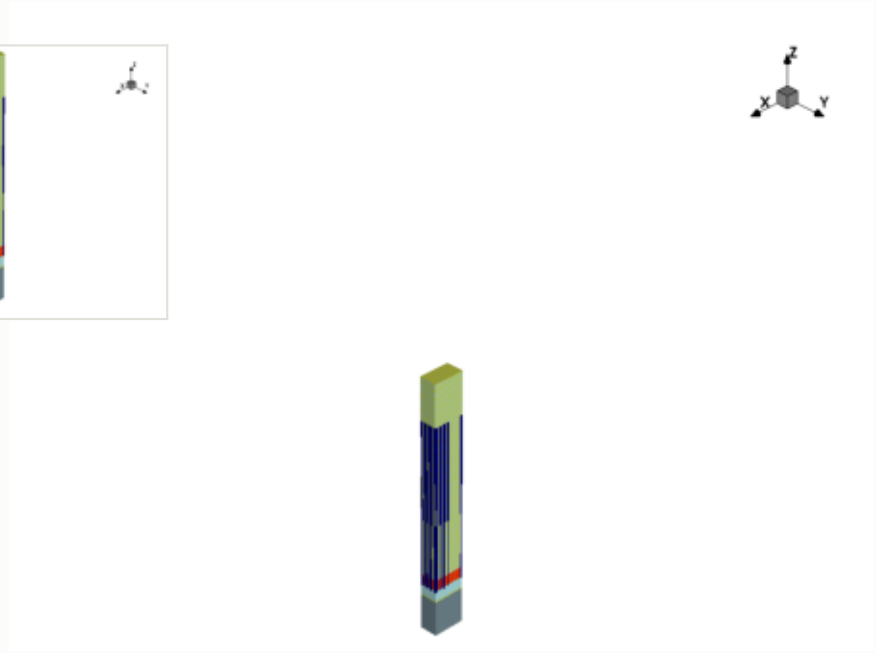

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

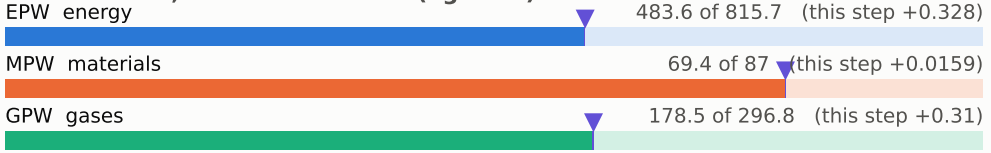

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

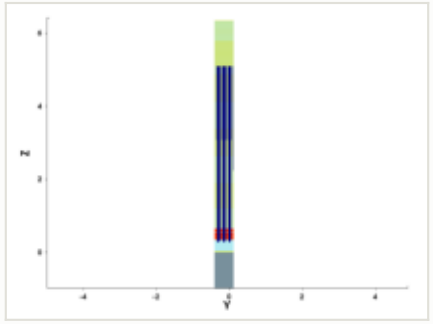

y cut at -0.150 µm

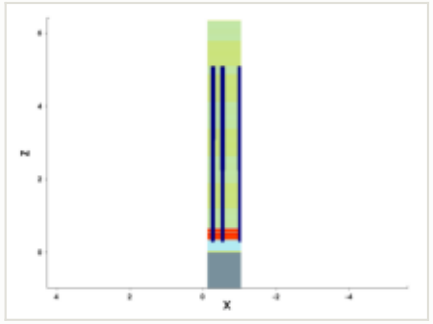

mask for this step

no mask for this step

steps by process area

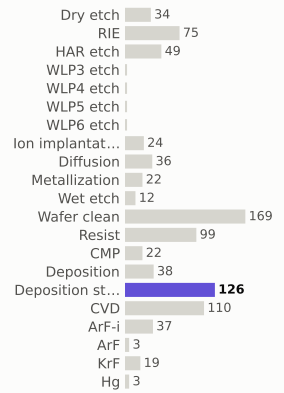

materials deposited (g)

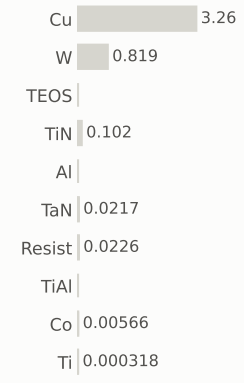

gases emitted (g)

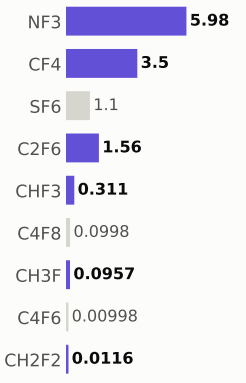

Step #17210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	732.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

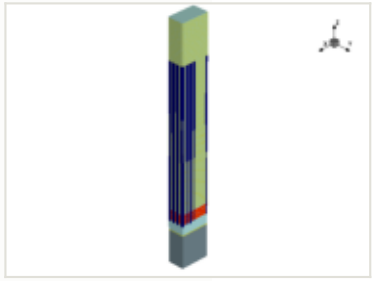

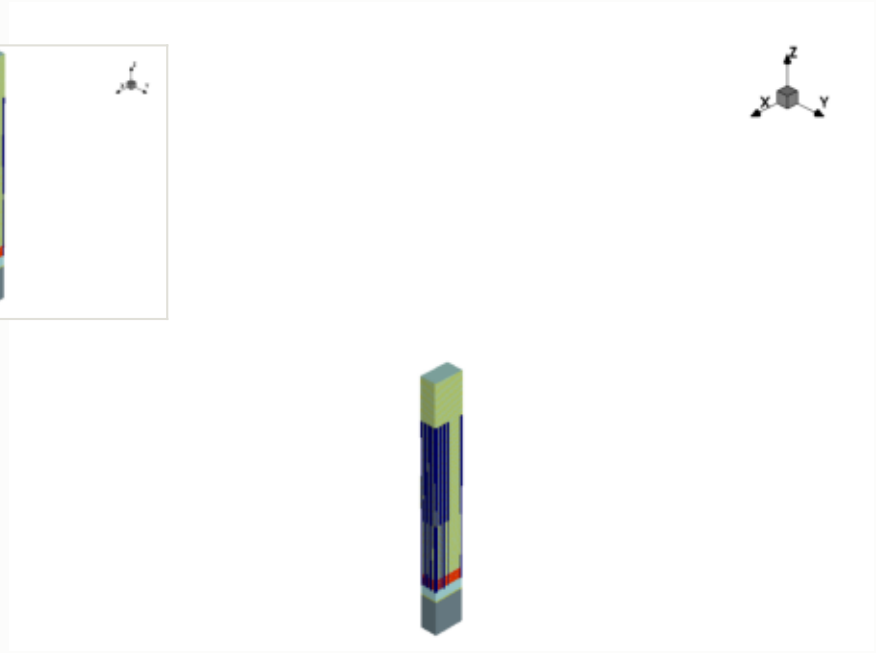

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

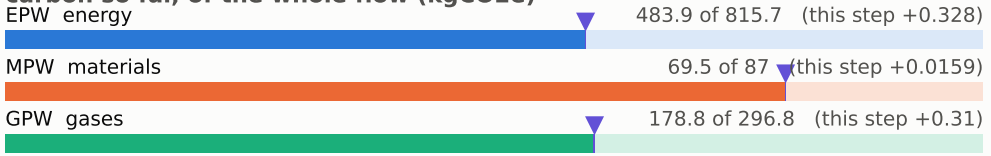

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

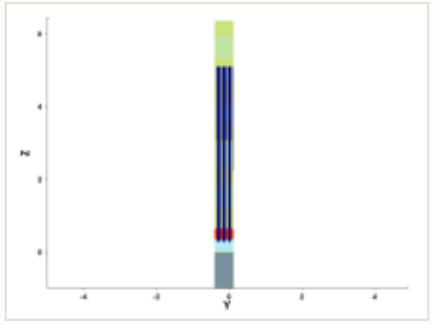

y cut at -0.150 µm

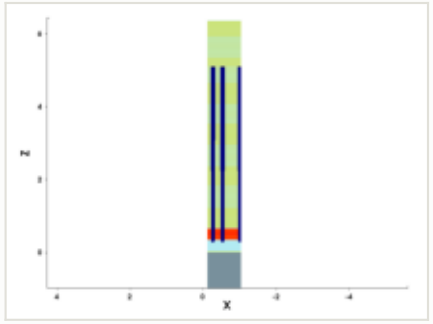

mask for this step

no mask for this step

steps by process area

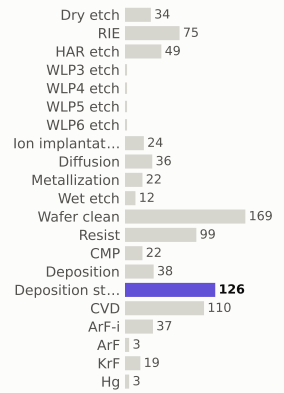

materials deposited (g)

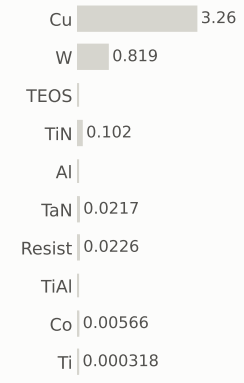

gases emitted (g)

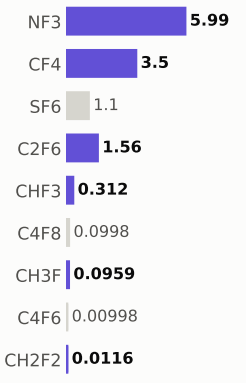

Step #17220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	732.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

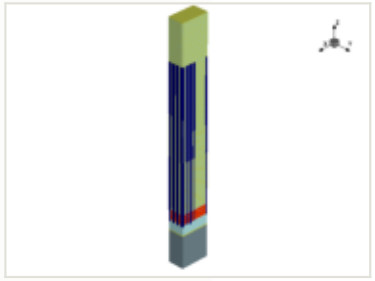

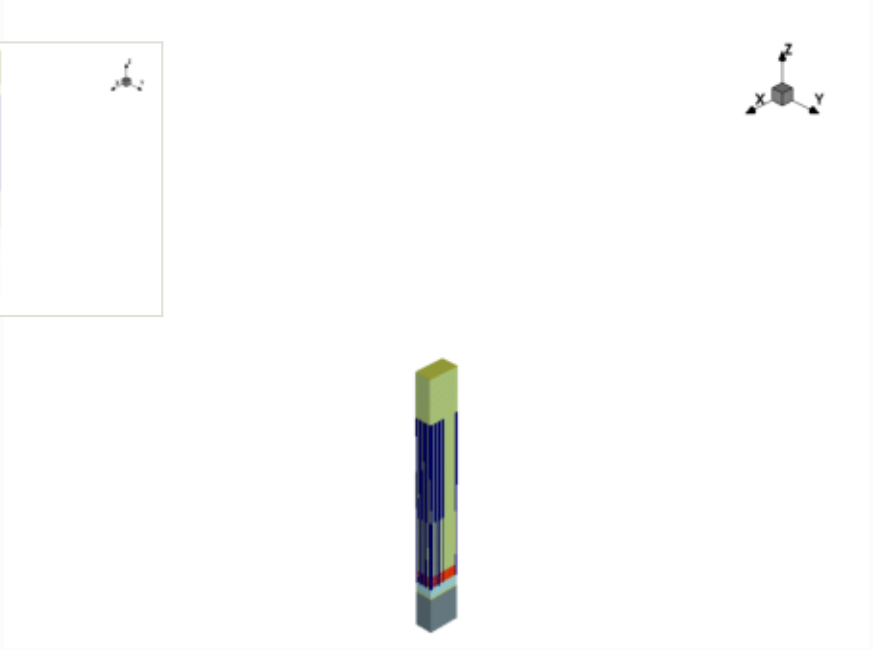

x cut at -0.570 µm

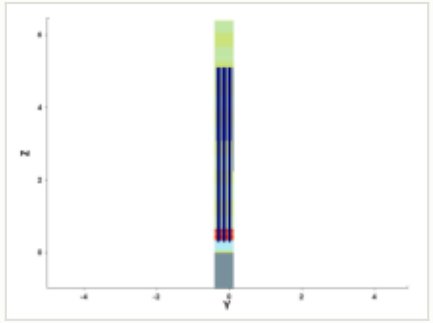

y cut at -0.150 µm

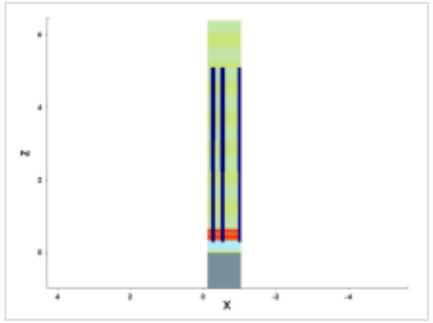

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

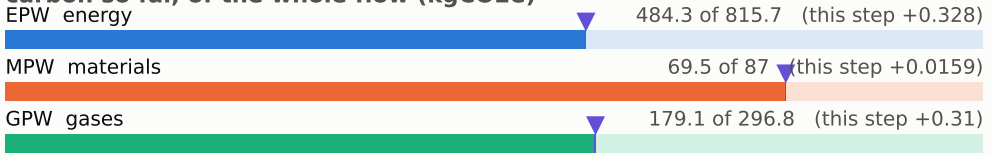

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

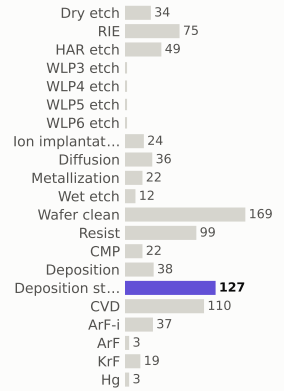

materials deposited (g)

gases emitted (g)

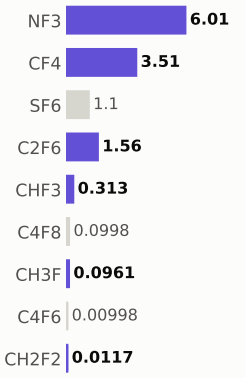

Step #17230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	733.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

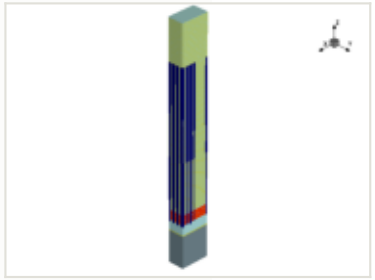

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

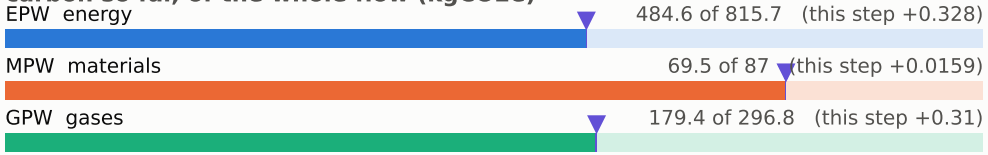

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

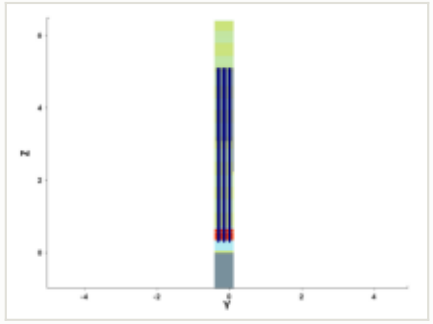

y cut at -0.150 µm

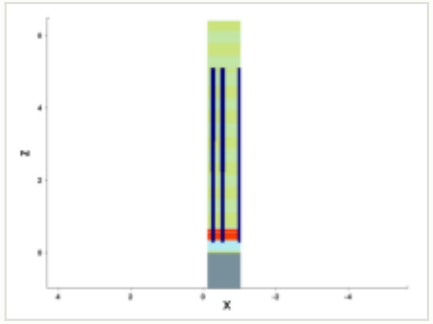

mask for this step

no mask for this step

steps by process area

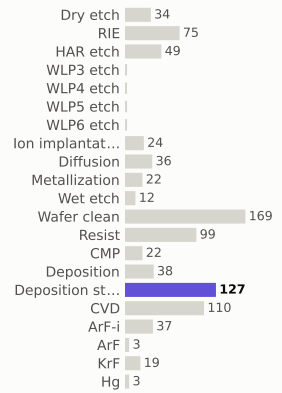

materials deposited (g)

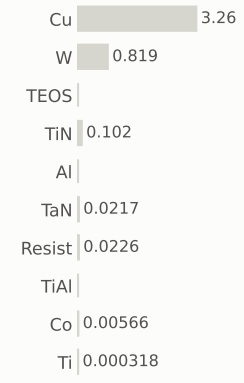

gases emitted (g)

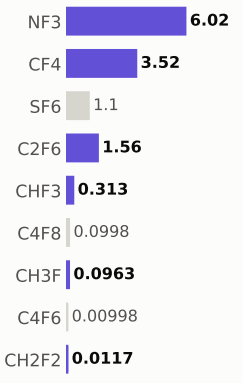

Step #17240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	734.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

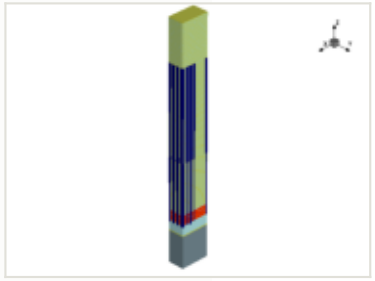

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

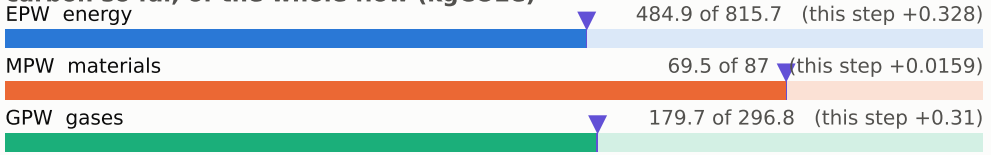

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

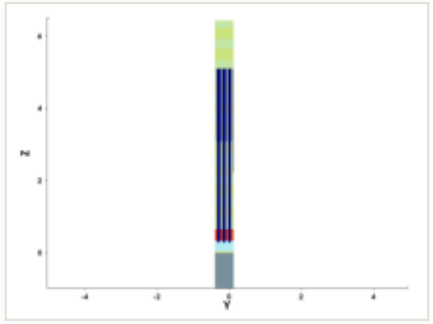

y cut at -0.150 µm

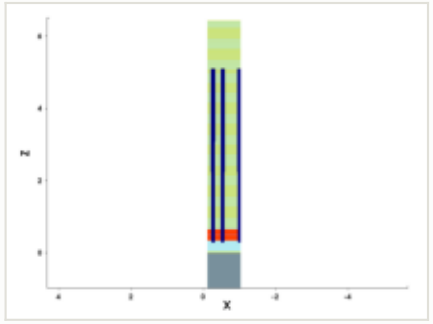

mask for this step

no mask for this step

steps by process area

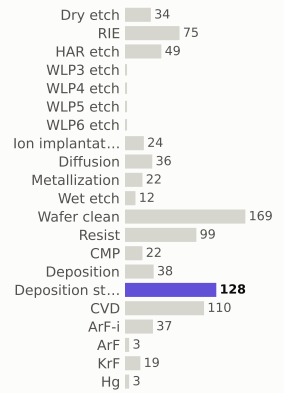

materials deposited (g)

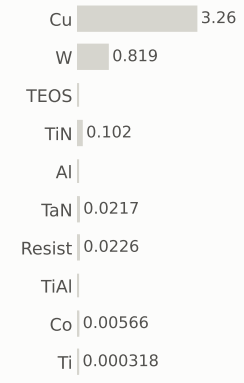

gases emitted (g)

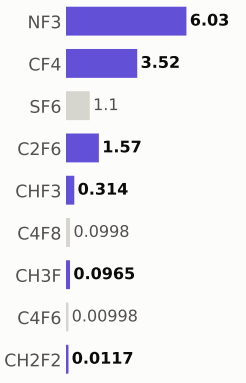

Step #17250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	734.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

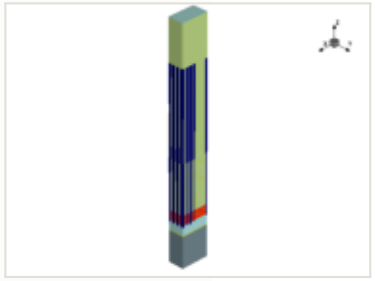

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

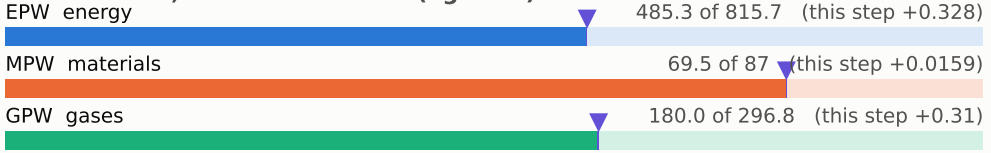

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

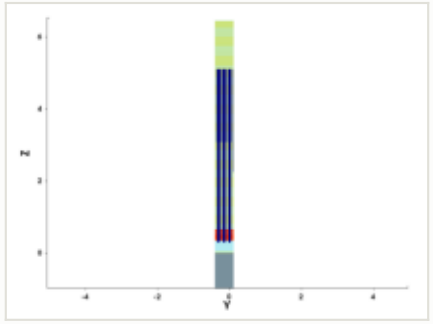

y cut at -0.150 µm

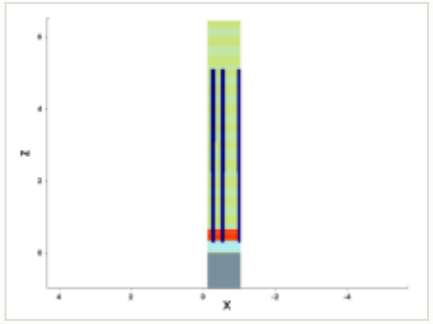

mask for this step

no mask for this step

steps by process area

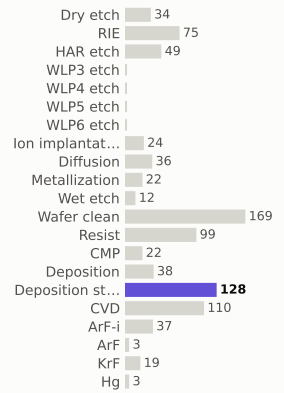

materials deposited (g)

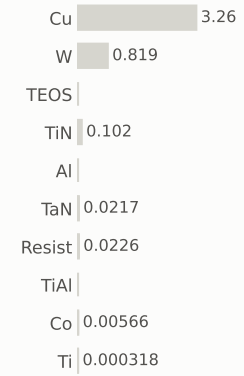

gases emitted (g)

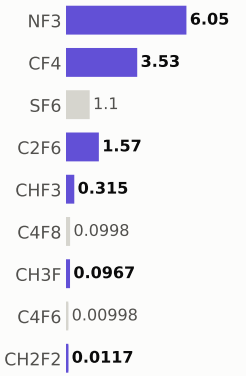

Step #17260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	735.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

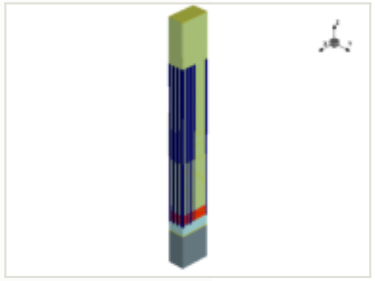

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

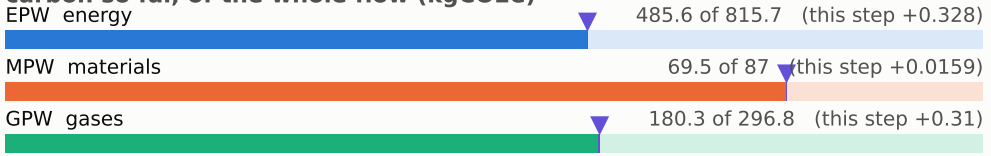

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

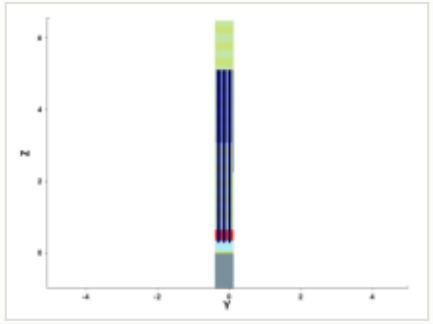

y cut at -0.150 µm

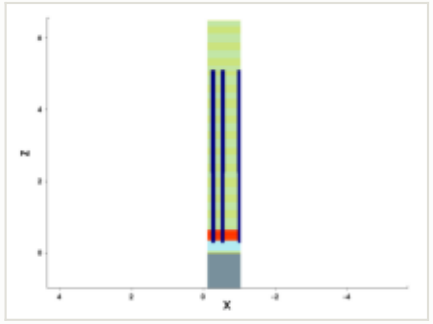

mask for this step

no mask for this step

steps by process area

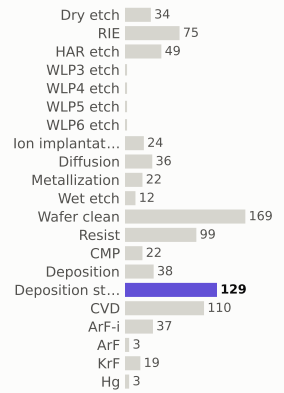

materials deposited (g)

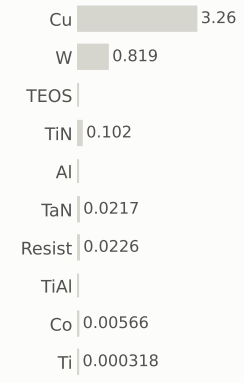

gases emitted (g)

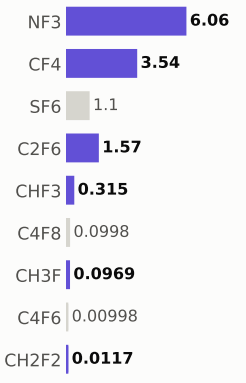

Step #17270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	736.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

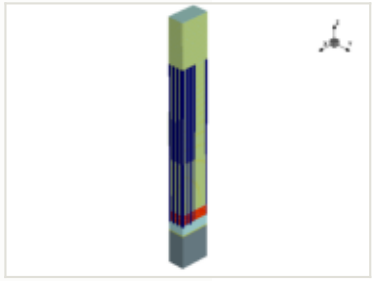

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

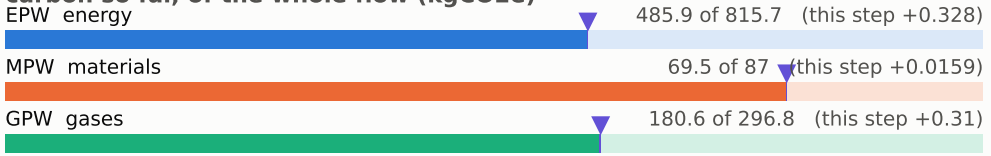

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

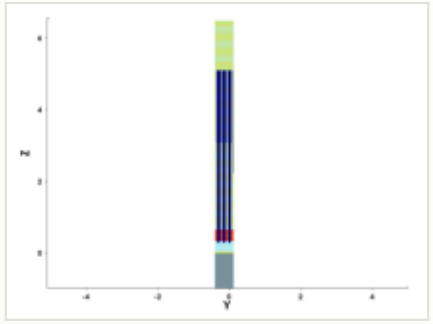

y cut at -0.150 µm

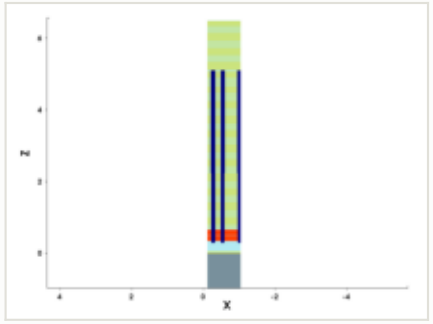

mask for this step

no mask for this step

steps by process area

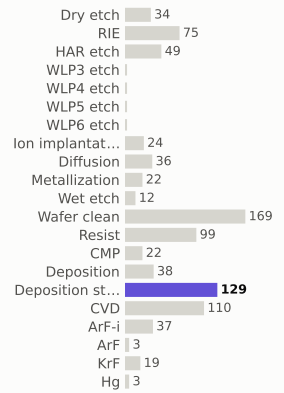

materials deposited (g)

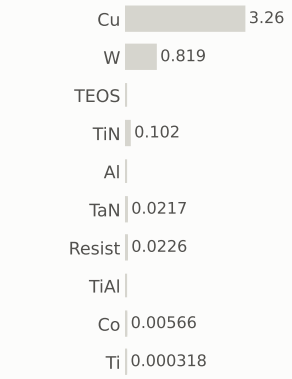

gases emitted (g)

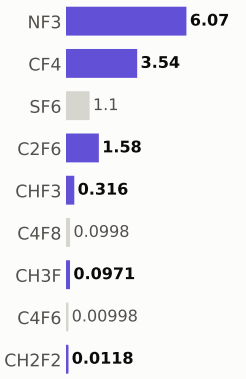

Step #17280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	736.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

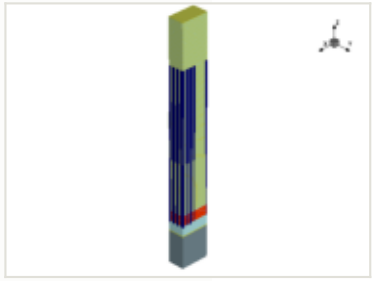

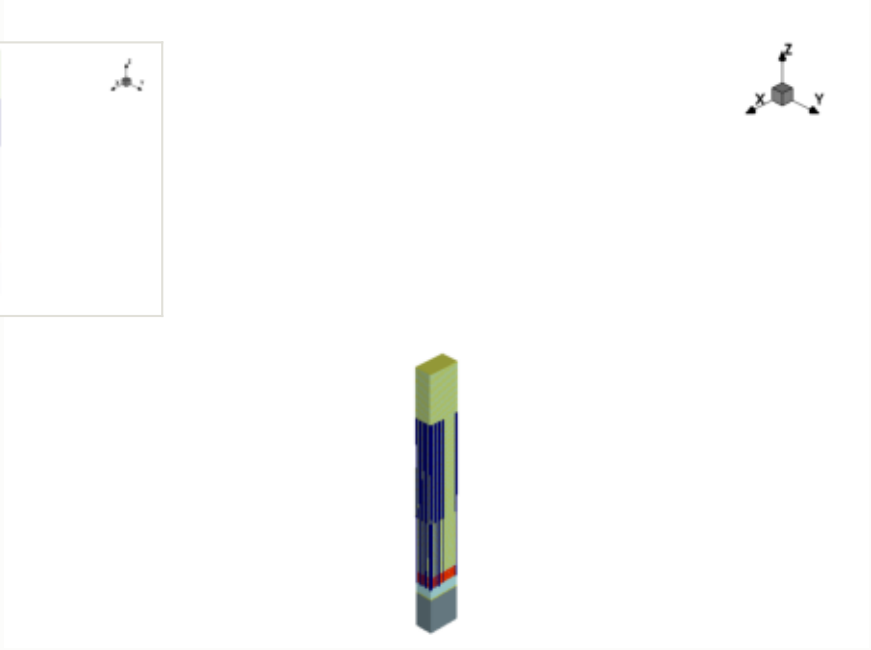

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

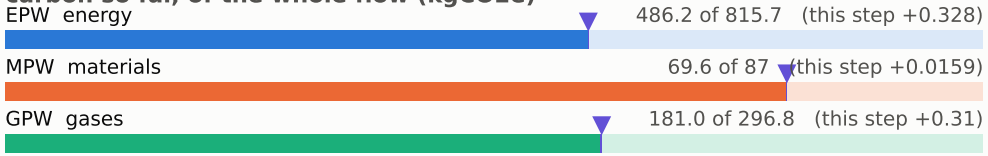

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

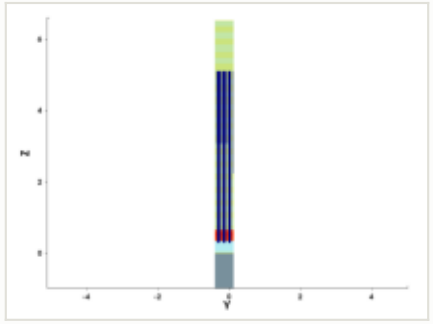

y cut at -0.150 µm

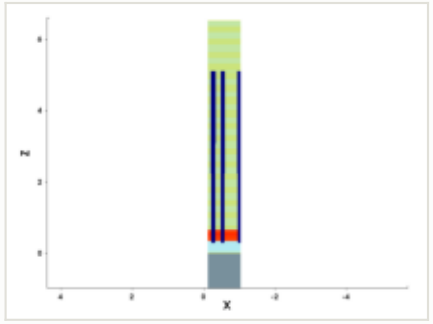

mask for this step

no mask for this step

steps by process area

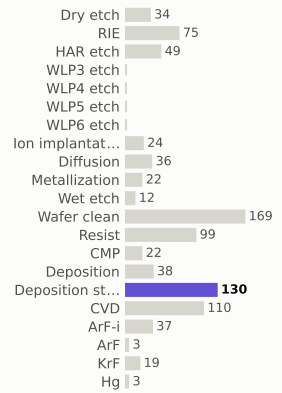

materials deposited (g)

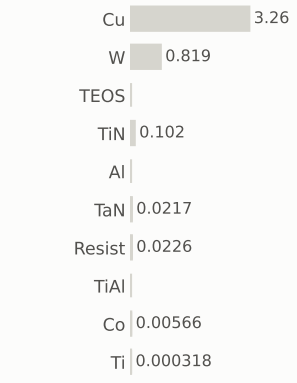

gases emitted (g)

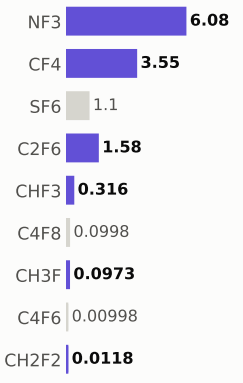

Step #17290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	737.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

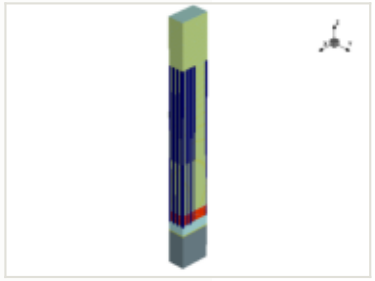

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

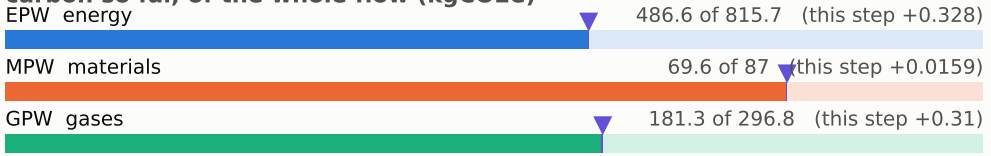

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

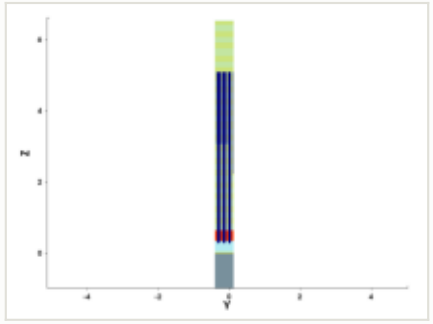

y cut at -0.150 µm

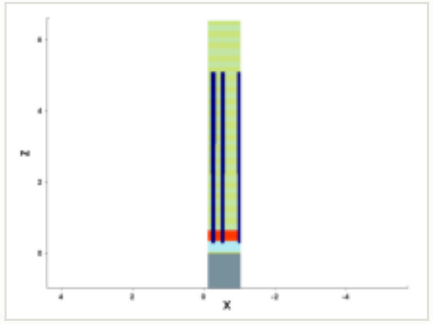

mask for this step

no mask for this step

steps by process area

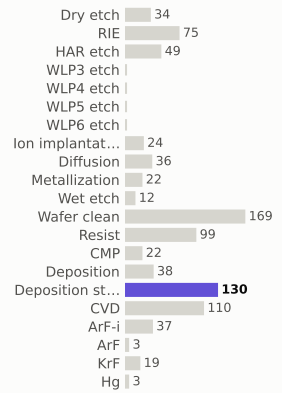

materials deposited (g)

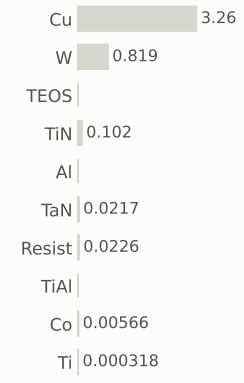

gases emitted (g)

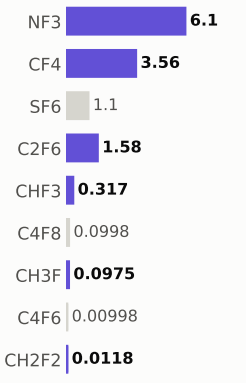

Step #17300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	738.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

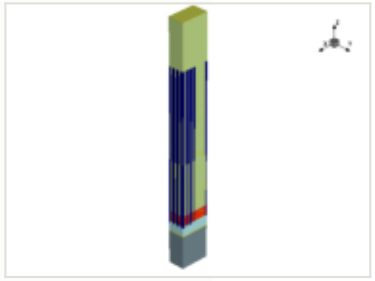

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

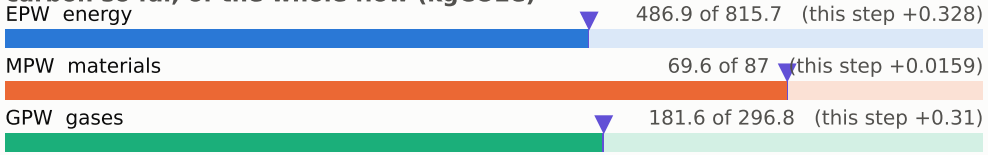

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

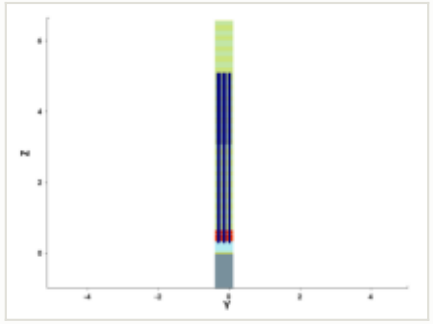

y cut at -0.150 µm

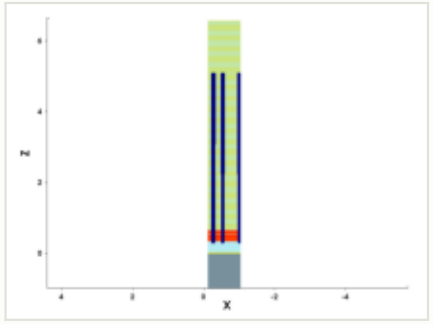

mask for this step

no mask for this step

steps by process area

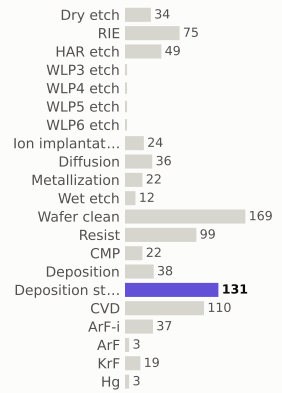

materials deposited (g)

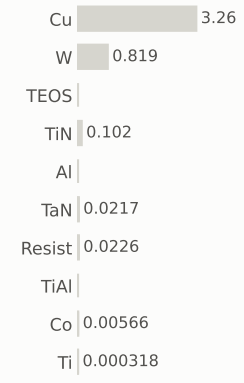

gases emitted (g)

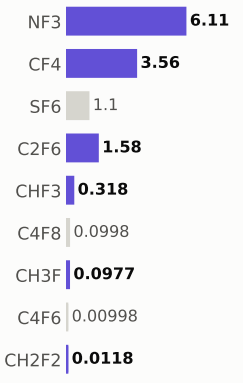

Step #17310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	738.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

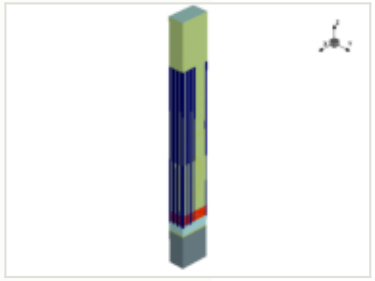

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

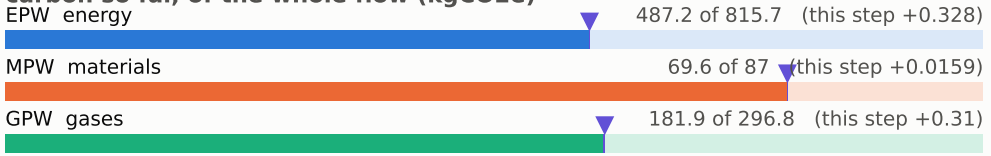

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

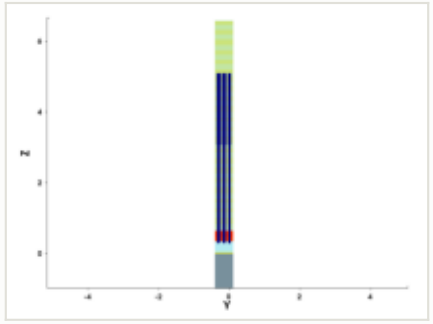

y cut at -0.150 µm

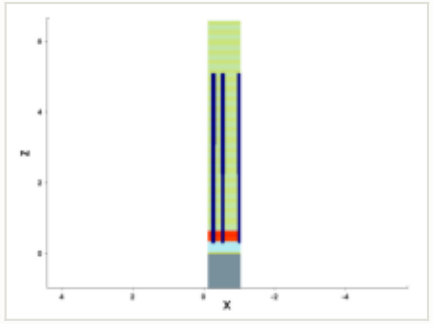

mask for this step

no mask for this step

steps by process area

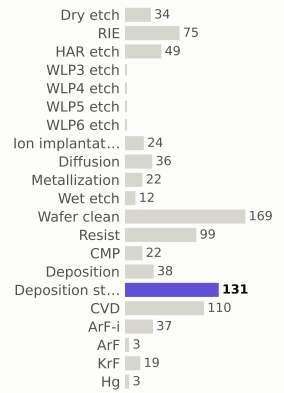

materials deposited (g)

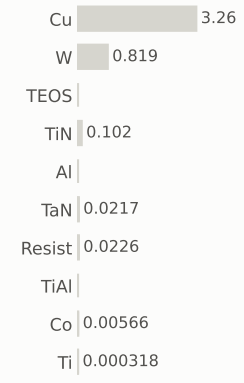

gases emitted (g)

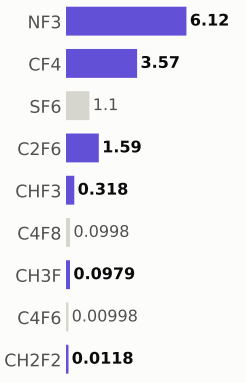

Step #17320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	739.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

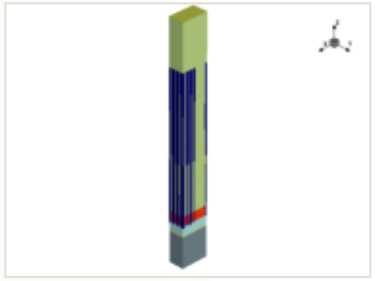

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

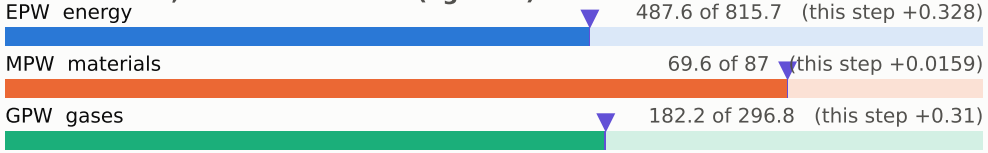

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

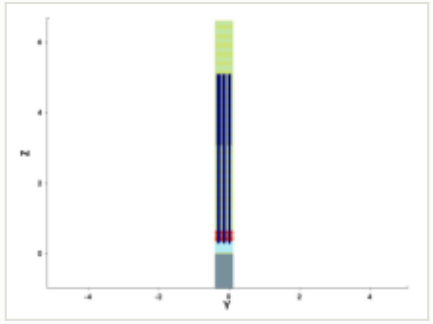

y cut at -0.150 µm

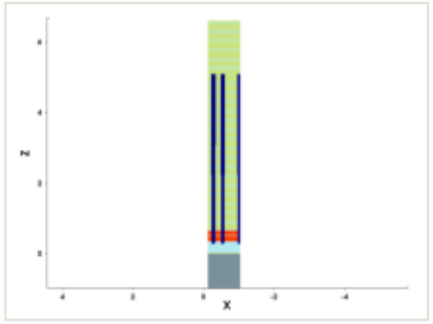

mask for this step

no mask for this step

steps by process area

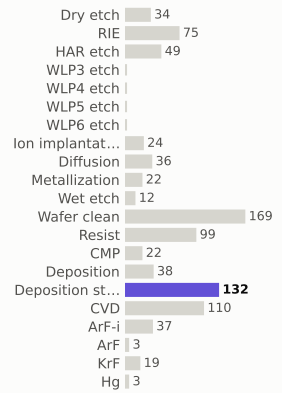

materials deposited (g)

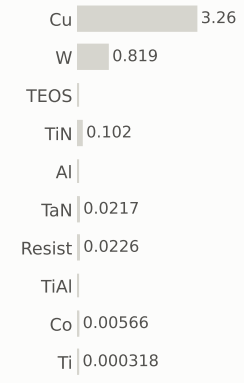

gases emitted (g)

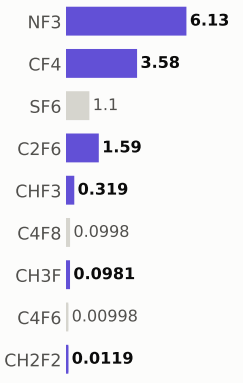

Step #17330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	740.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

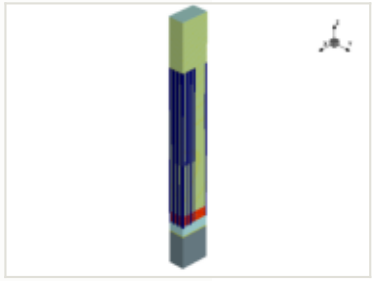

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

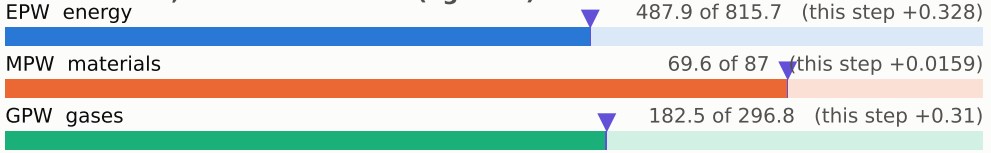

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

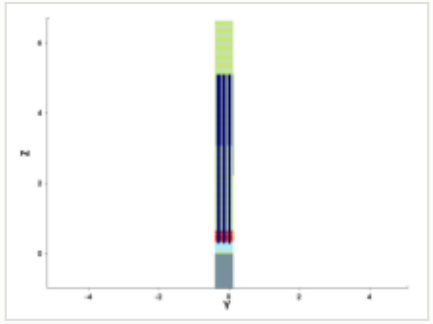

y cut at -0.150 µm

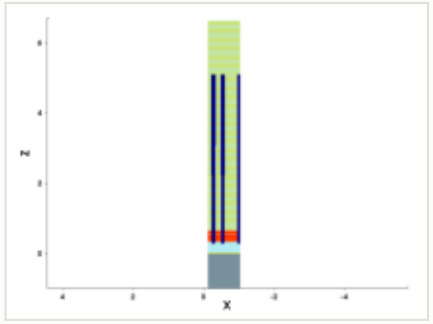

mask for this step

no mask for this step

steps by process area

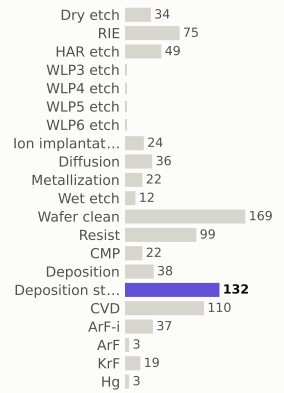

materials deposited (g)

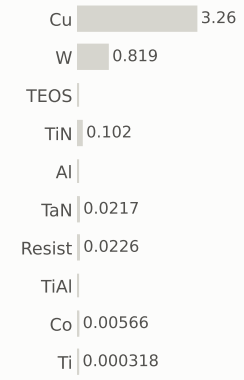

gases emitted (g)

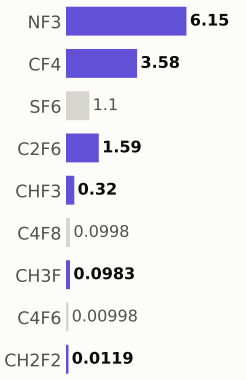

Step #17340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	740.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

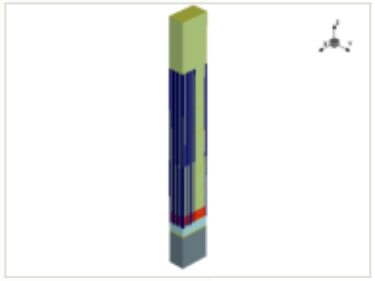

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

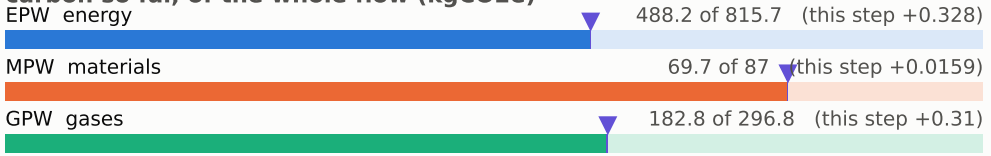

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

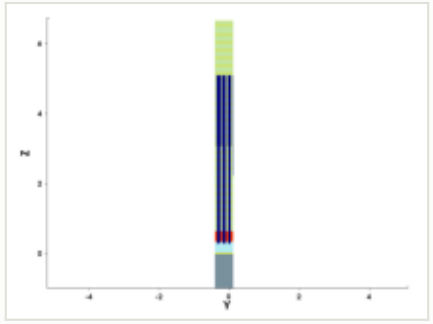

y cut at -0.150 µm

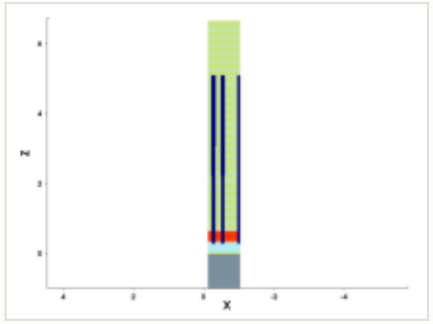

mask for this step

no mask for this step

steps by process area

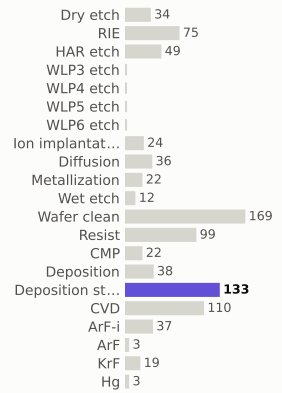

materials deposited (g)

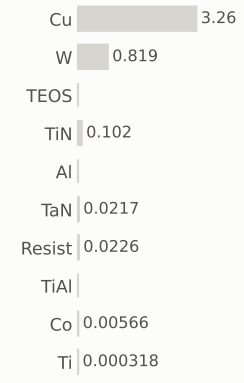

gases emitted (g)

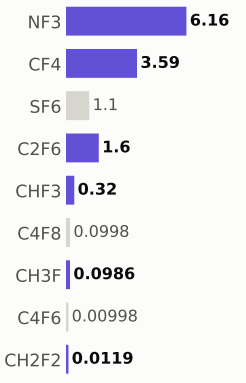

Step #17350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	741.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

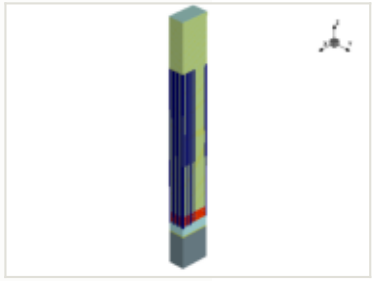

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

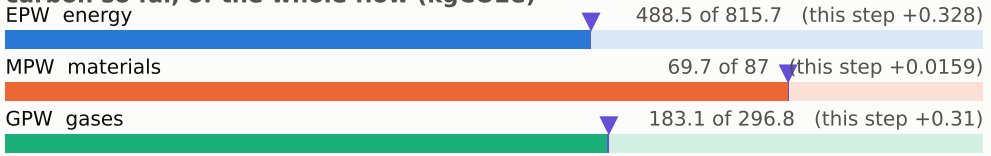

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

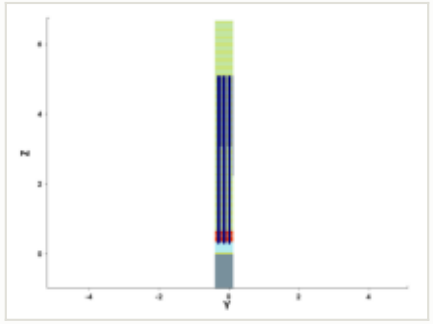

y cut at -0.150 µm

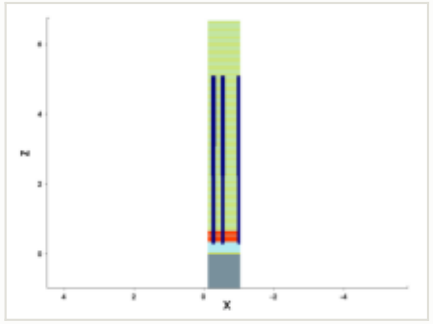

mask for this step

no mask for this step

steps by process area

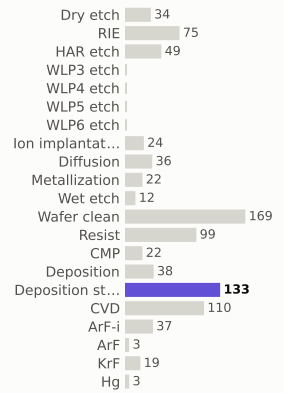

materials deposited (g)

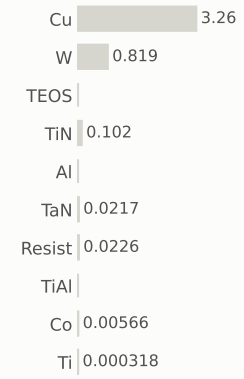

gases emitted (g)

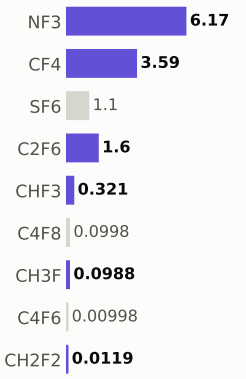

Step #17360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	742.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

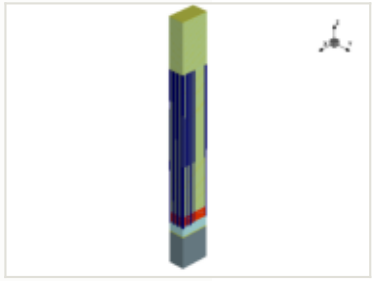

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

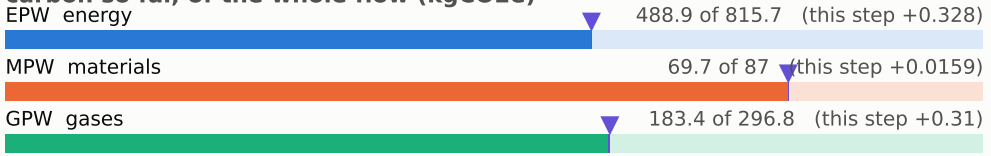

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

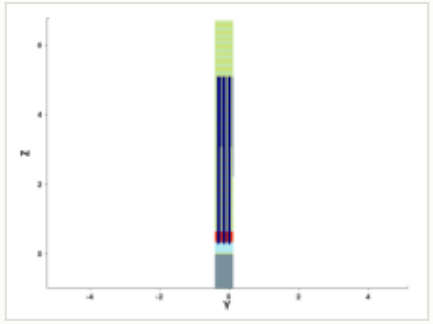

y cut at -0.150 µm

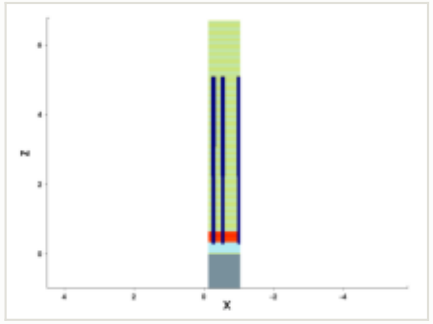

mask for this step

no mask for this step

steps by process area

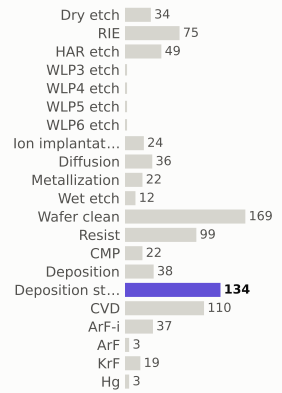

materials deposited (g)

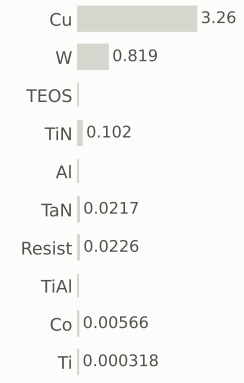

gases emitted (g)

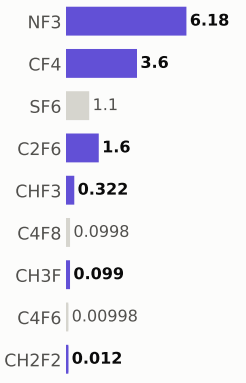

Step #17370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	742.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

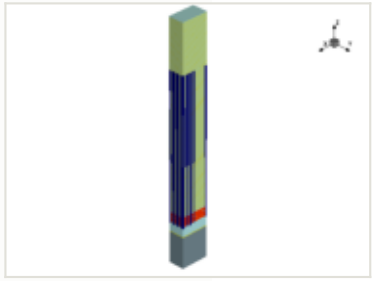

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

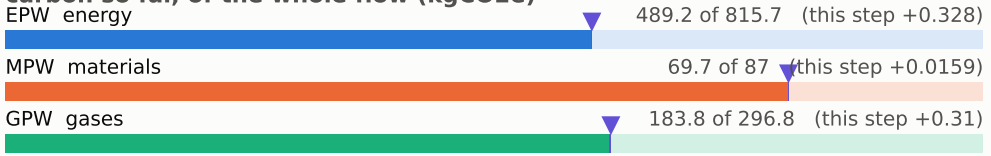

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

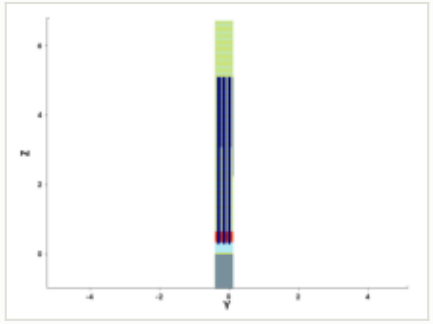

y cut at -0.150 µm

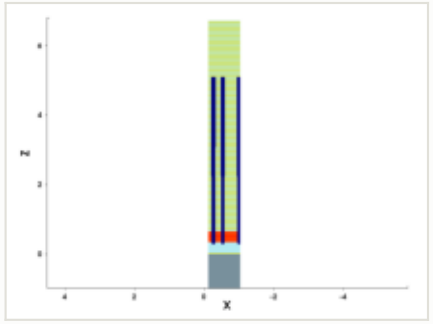

mask for this step

no mask for this step

steps by process area

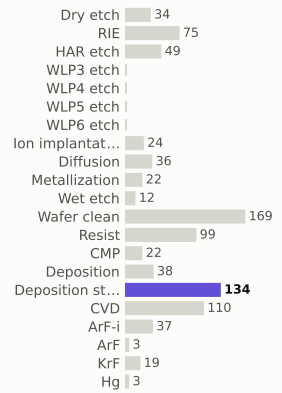

materials deposited (g)

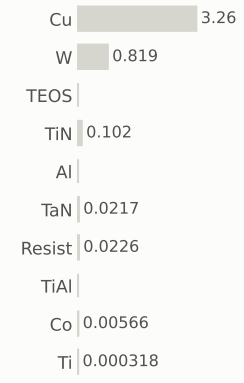

gases emitted (g)

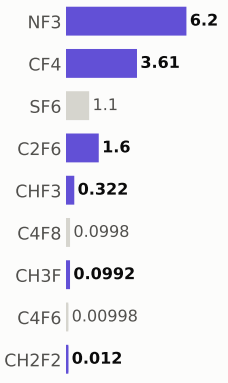

Step #17380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	743.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

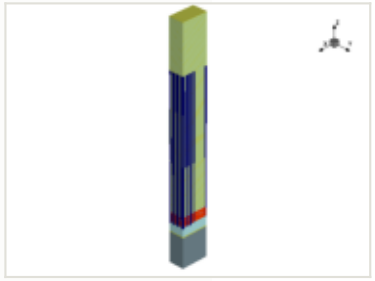

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

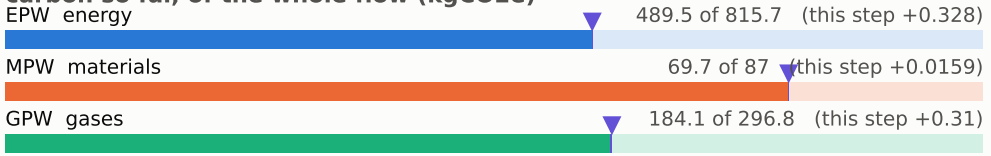

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

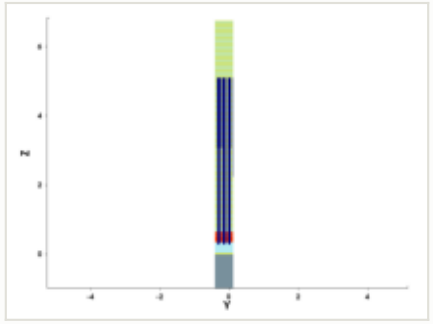

y cut at -0.150 µm

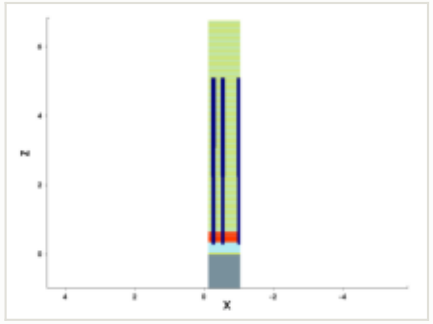

mask for this step

no mask for this step

steps by process area

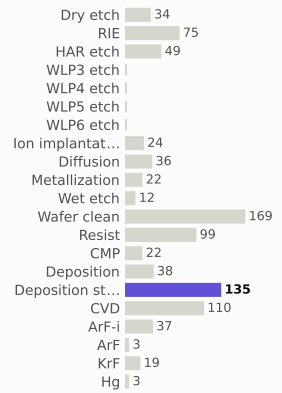

materials deposited (g)

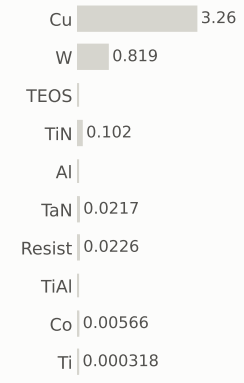

gases emitted (g)

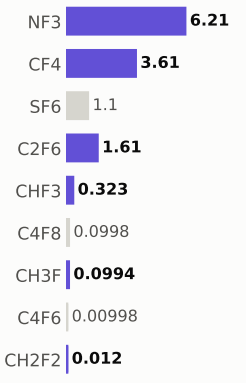

Step #17390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	744.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

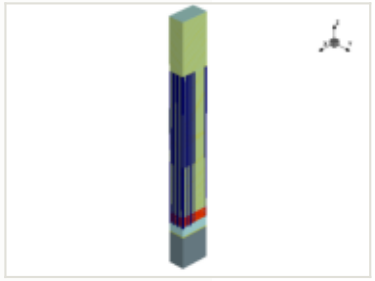

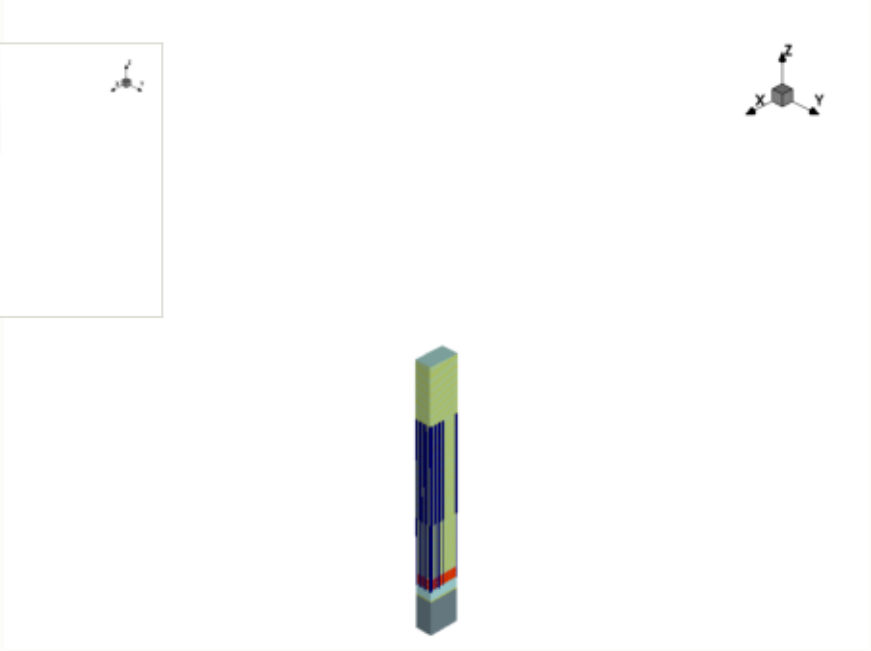

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

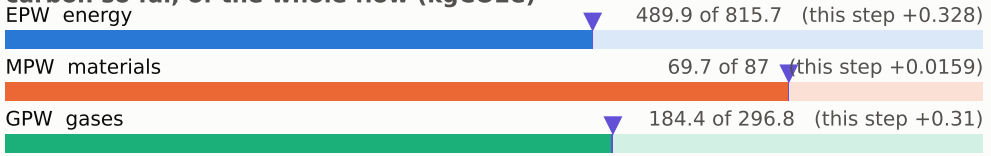

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

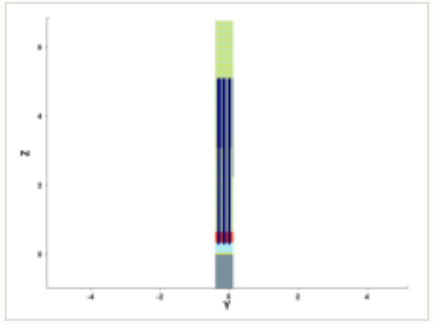

y cut at -0.150 µm

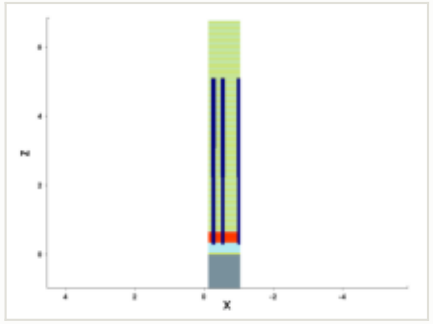

mask for this step

no mask for this step

steps by process area

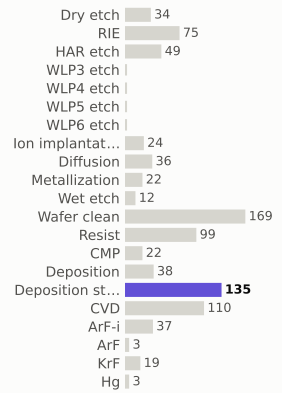

materials deposited (g)

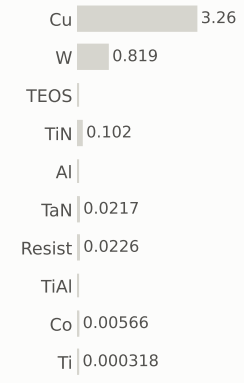

gases emitted (g)

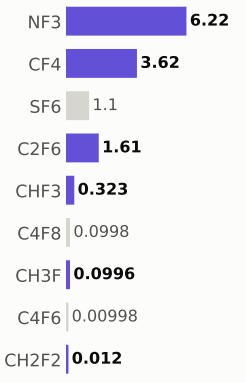

Step #17400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	744.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

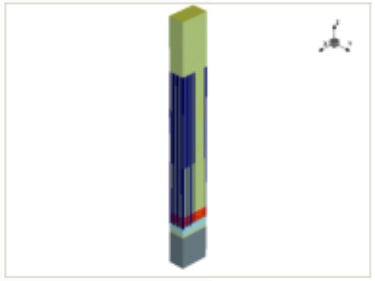

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

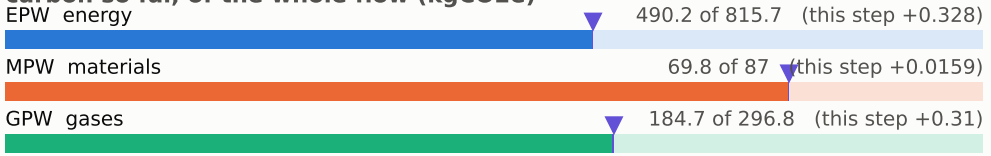

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

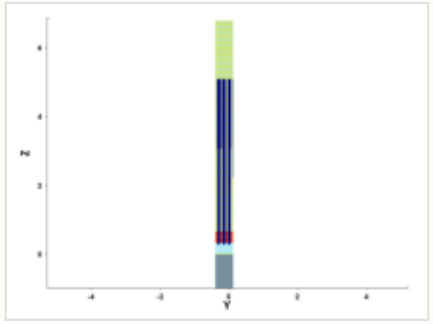

y cut at -0.150 µm

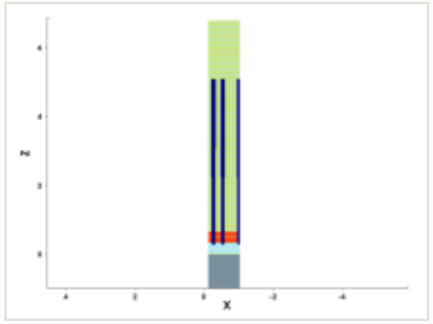

mask for this step

no mask for this step

steps by process area

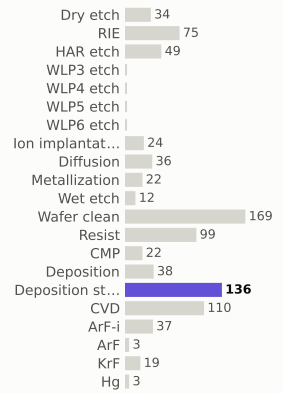

materials deposited (g)

gases emitted (g)

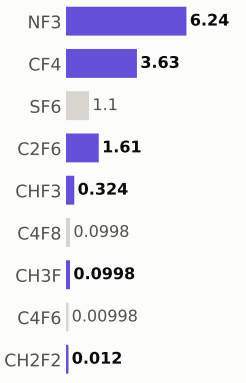

Step #17410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	745.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

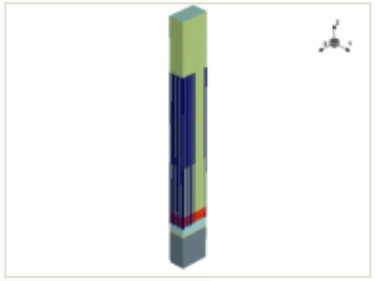

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

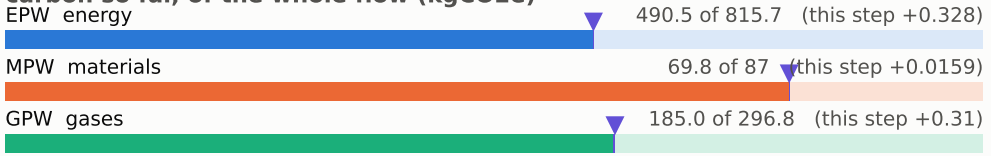

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

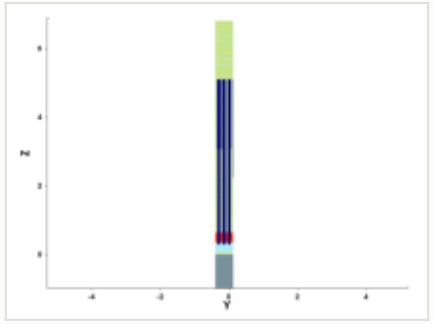

y cut at -0.150 µm

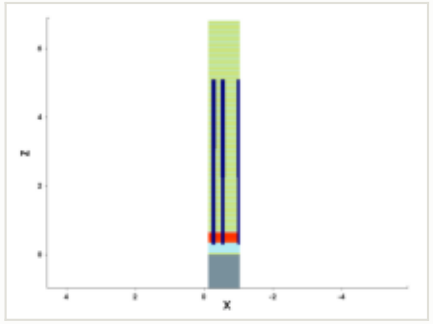

mask for this step

no mask for this step

steps by process area

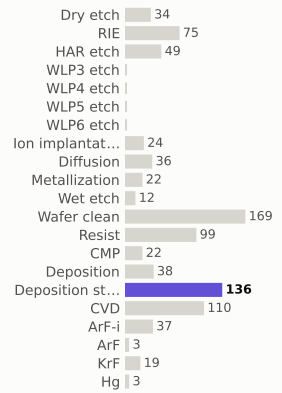

materials deposited (g)

gases emitted (g)

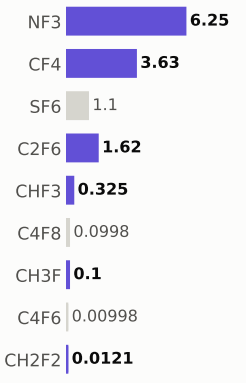

Step #17420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	745.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

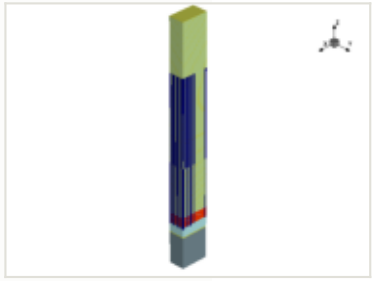

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

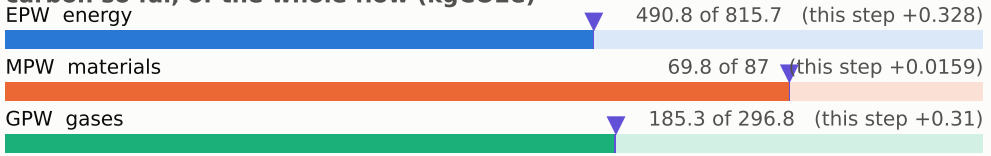

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

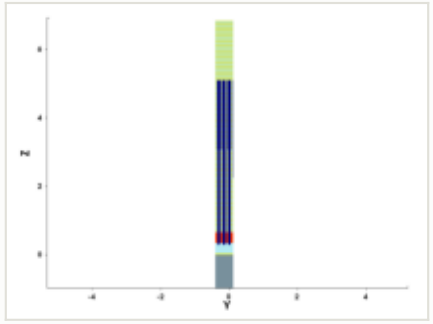

y cut at -0.150 µm

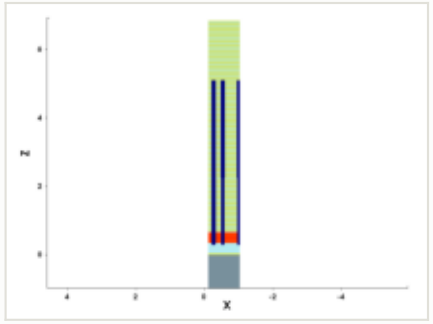

mask for this step

no mask for this step

steps by process area

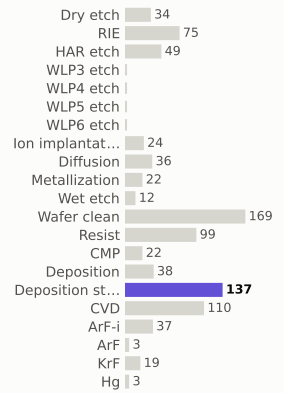

materials deposited (g)

gases emitted (g)

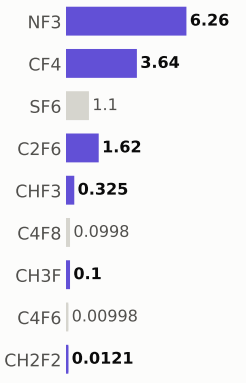

Step #17430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	746.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

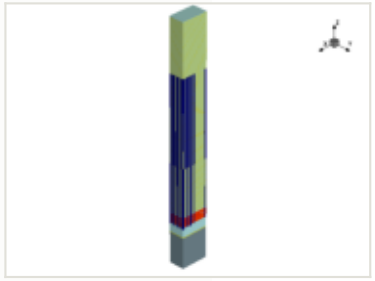

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

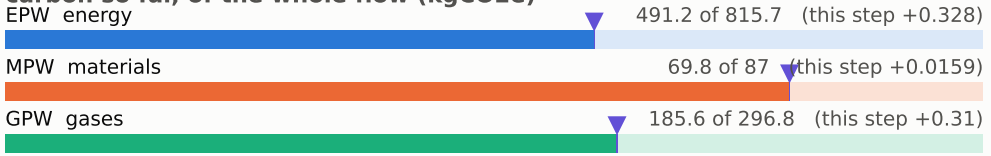

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

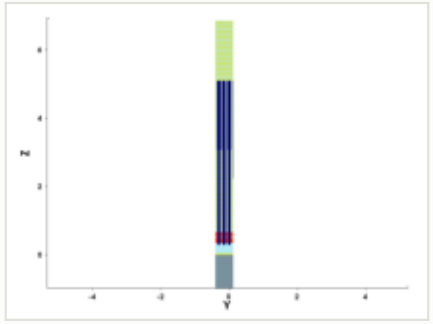

y cut at -0.150 µm

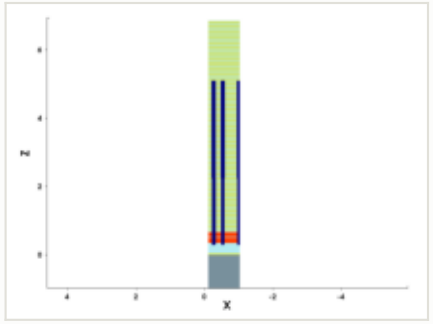

mask for this step

no mask for this step

steps by process area

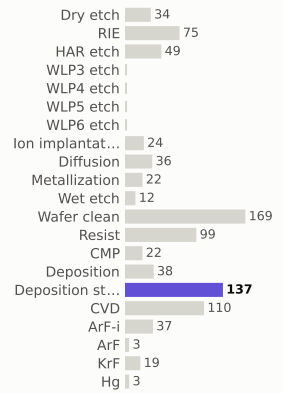

materials deposited (g)

gases emitted (g)

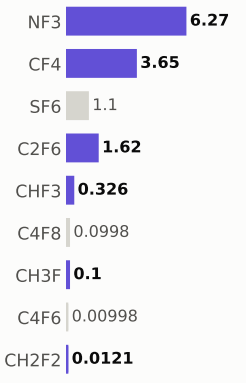

Step #17440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	747.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

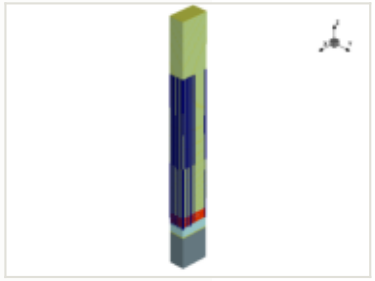

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

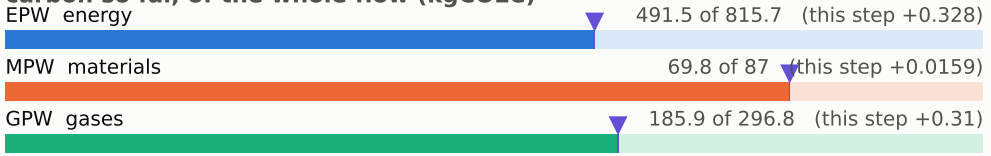

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

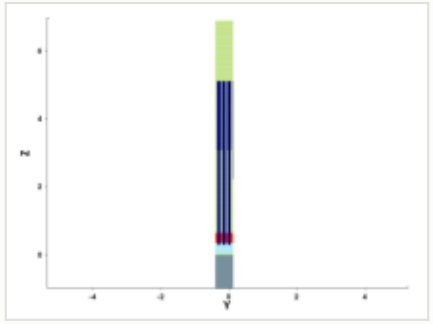

y cut at -0.150 µm

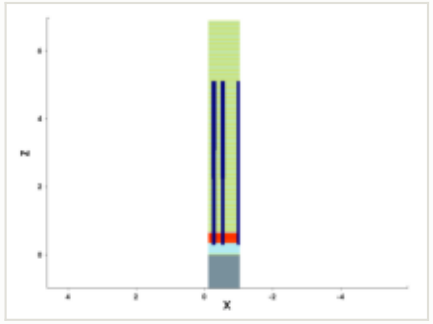

mask for this step

no mask for this step

steps by process area

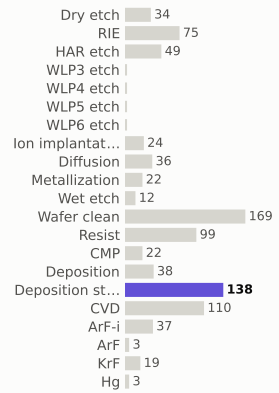

materials deposited (g)

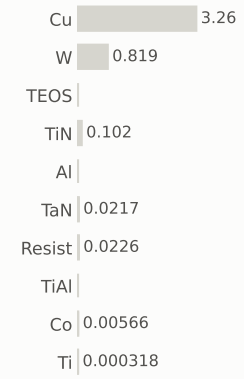

gases emitted (g)

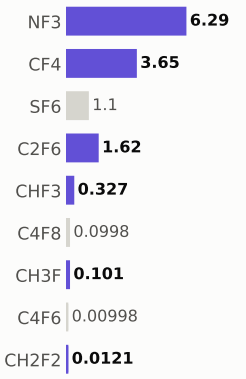

Step #17450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	747.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

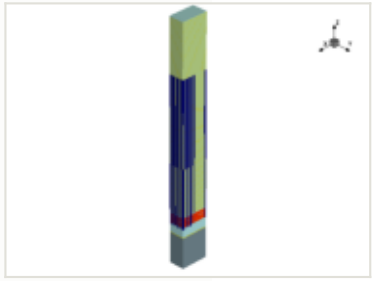

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

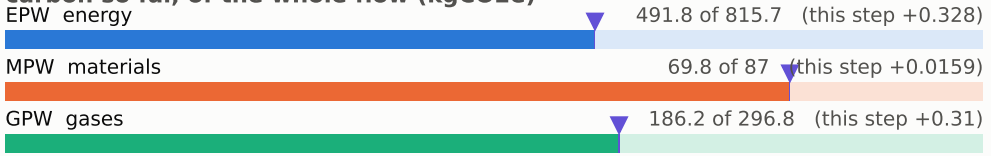

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

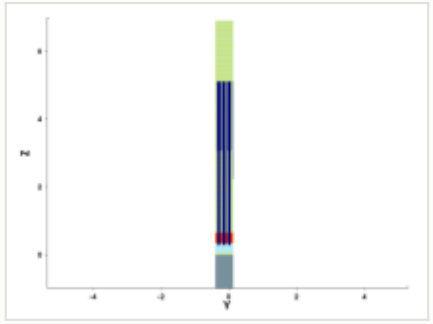

y cut at -0.150 µm

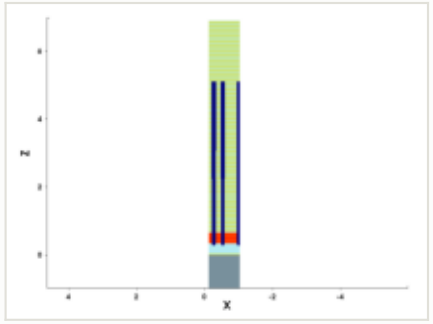

mask for this step

no mask for this step

steps by process area

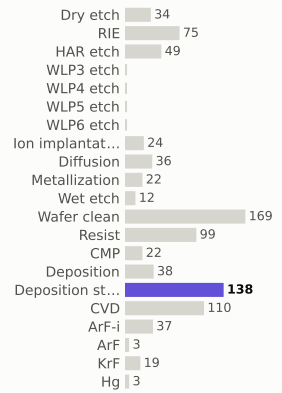

materials deposited (g)

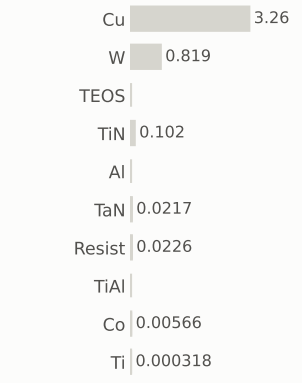

gases emitted (g)

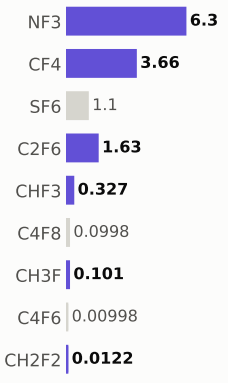

Step #17460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	748.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

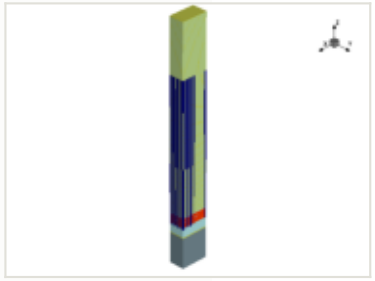

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

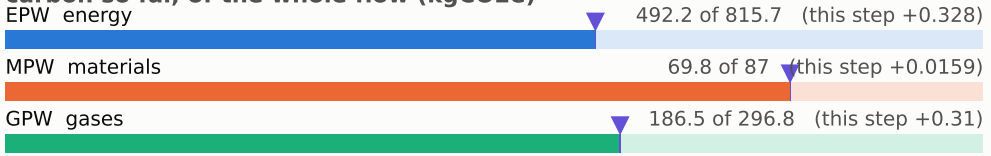

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

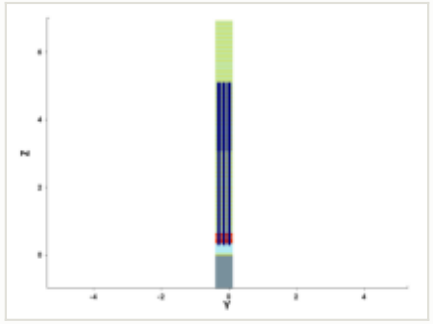

y cut at -0.150 µm

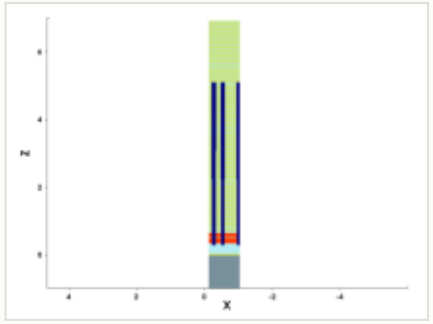

mask for this step

no mask for this step

steps by process area

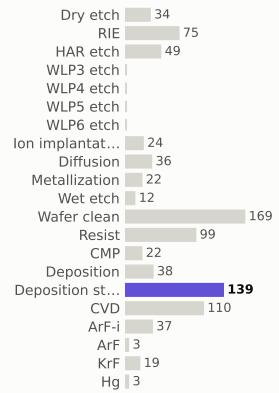

materials deposited (g)

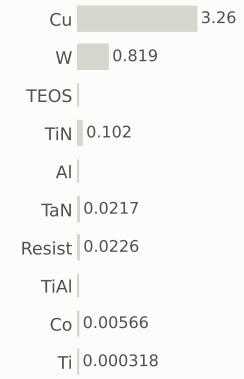

gases emitted (g)

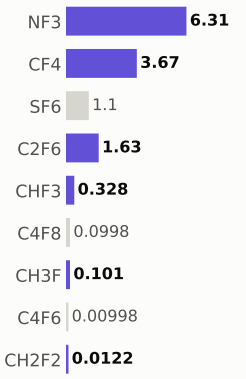

Step #17470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	749.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

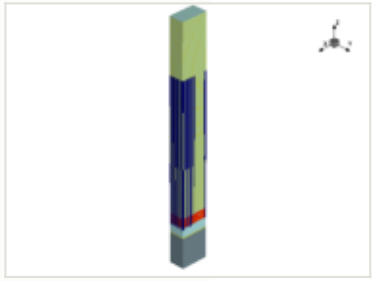

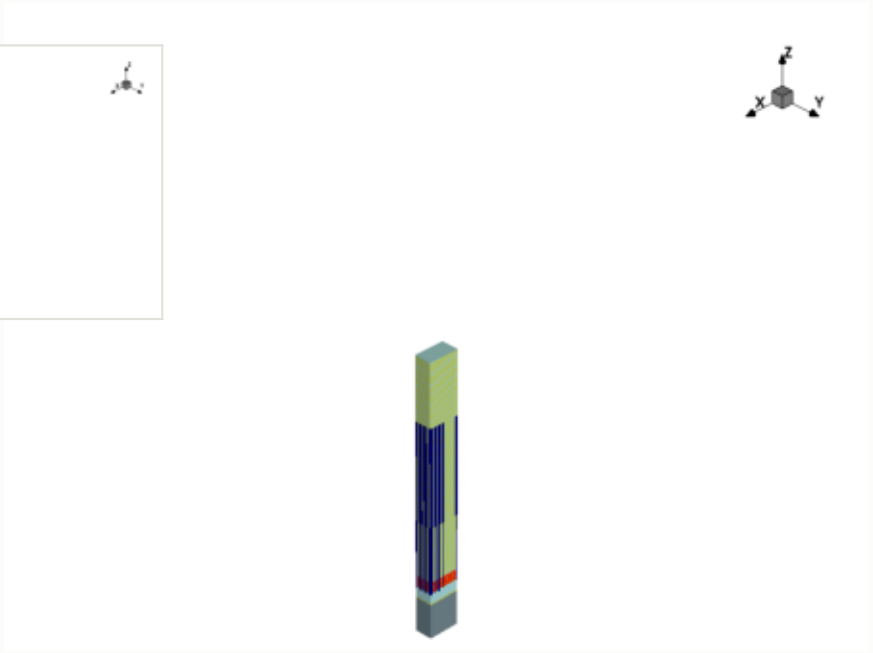

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

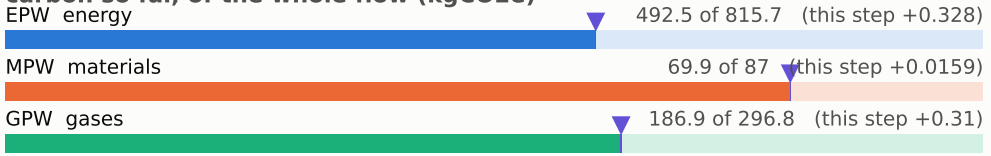

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

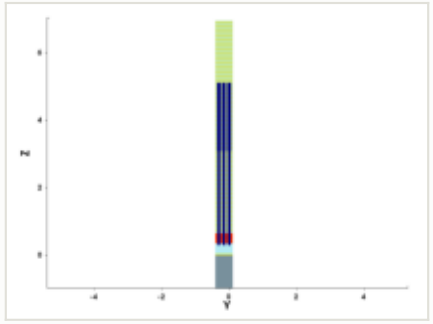

y cut at -0.150 µm

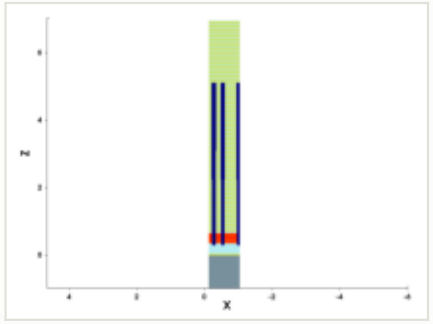

mask for this step

no mask for this step

steps by process area

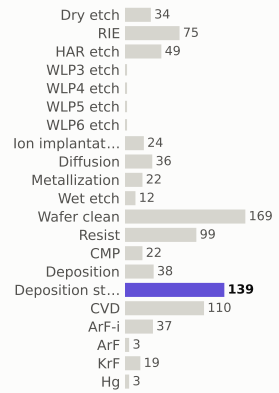

materials deposited (g)

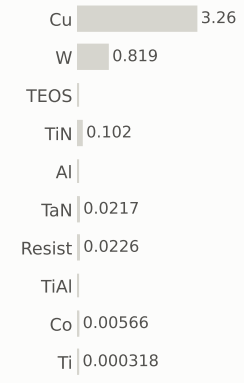

gases emitted (g)

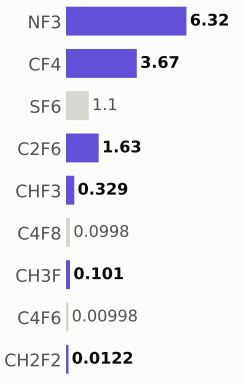

Step #17480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	749.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

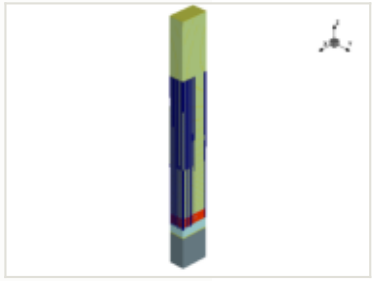

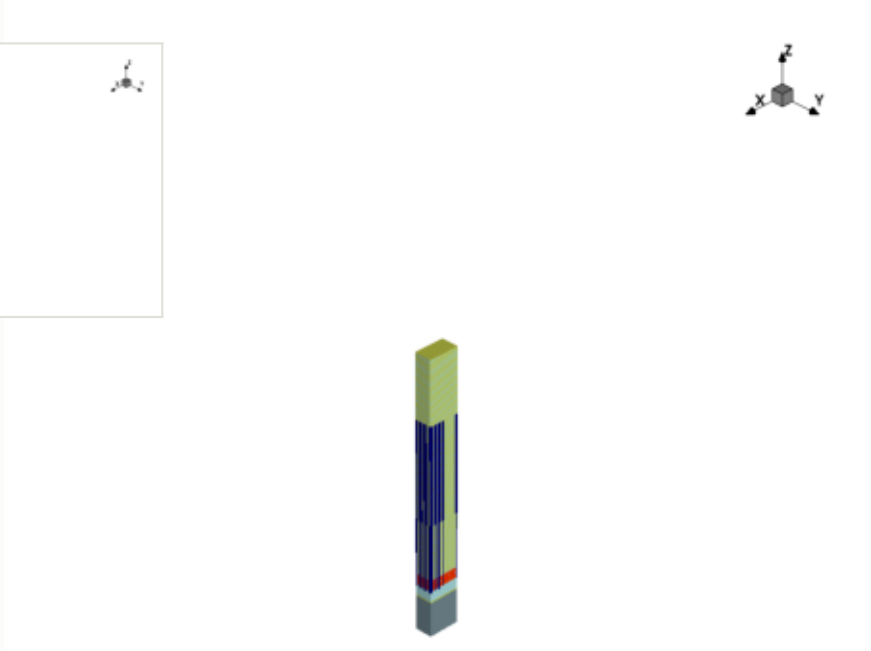

x cut at -0.570 µm

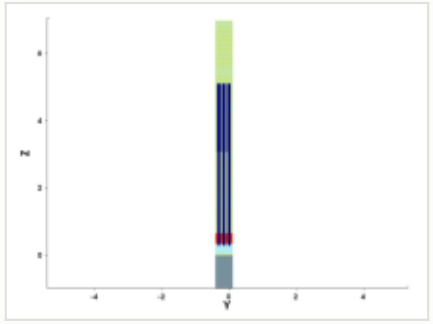

y cut at -0.150 µm

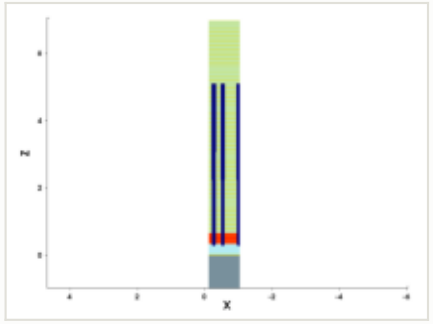

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

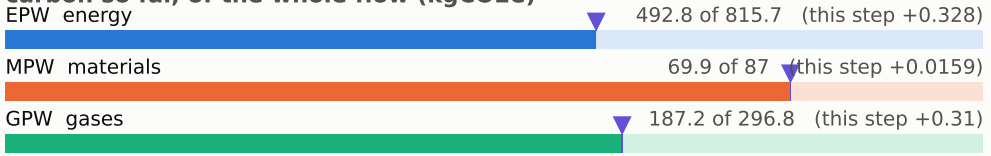

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

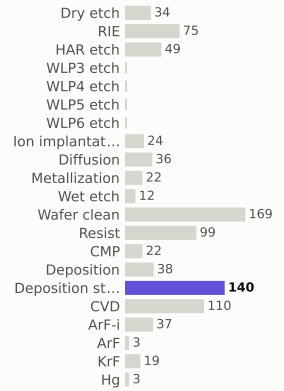

materials deposited (g)

gases emitted (g)

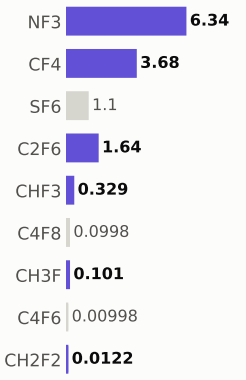

Step #17490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	750.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

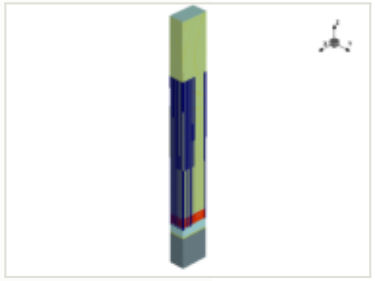

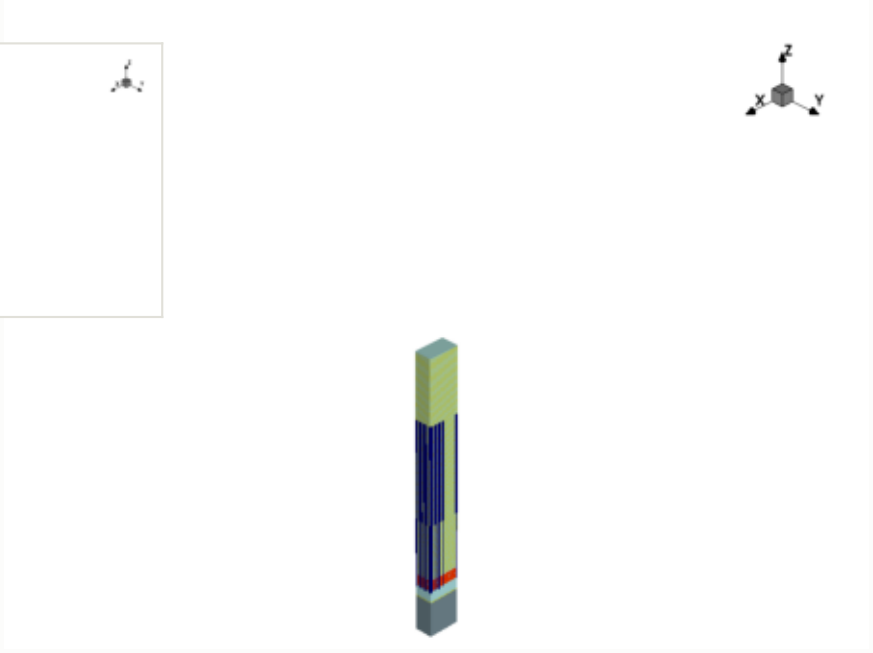

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

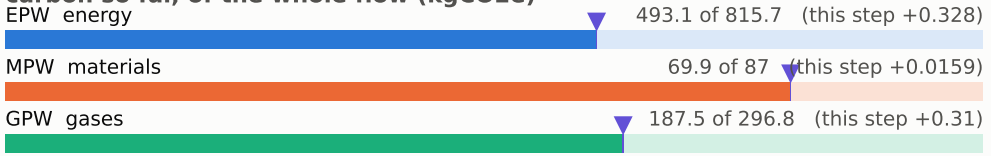

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

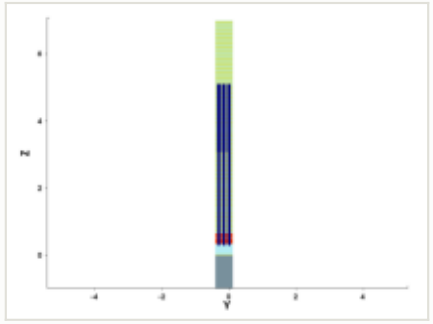

y cut at -0.150 µm

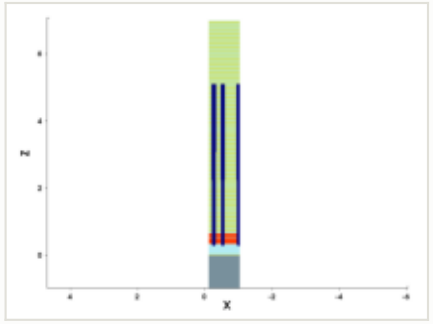

mask for this step

no mask for this step

steps by process area

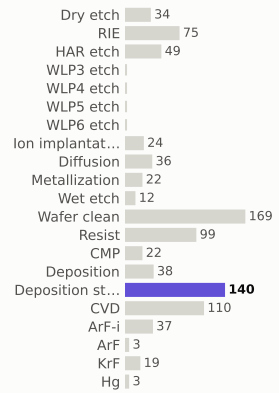

materials deposited (g)

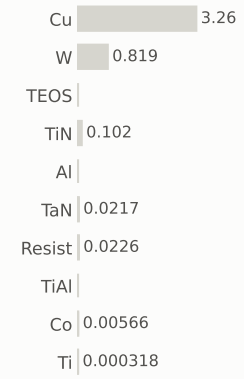

gases emitted (g)

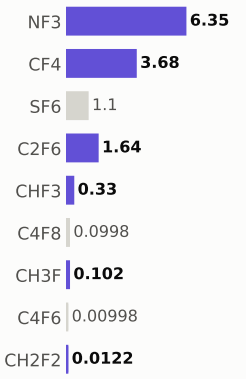

Step #17500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	751.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

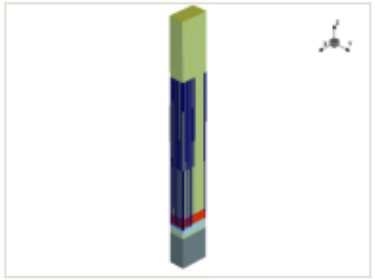

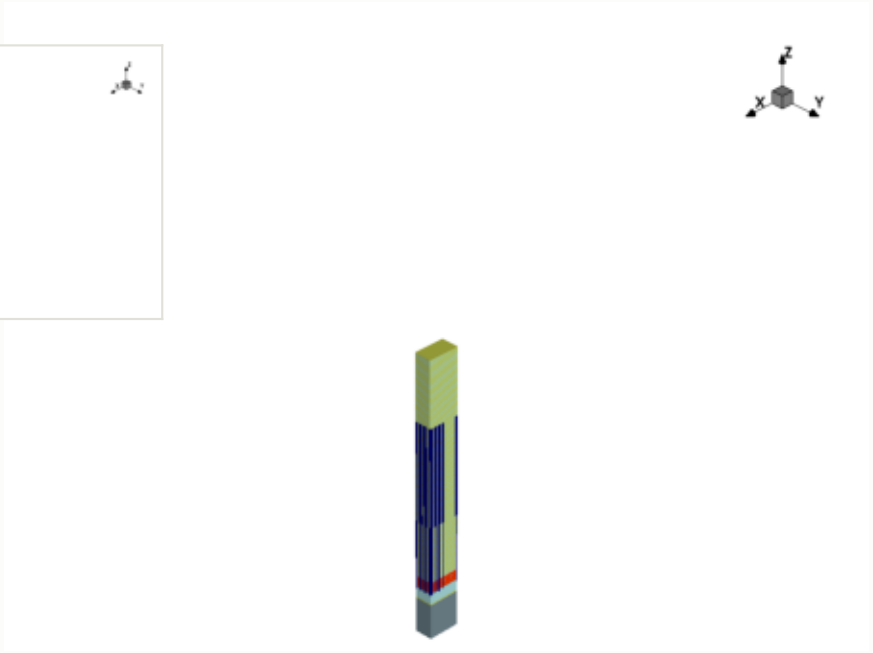

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

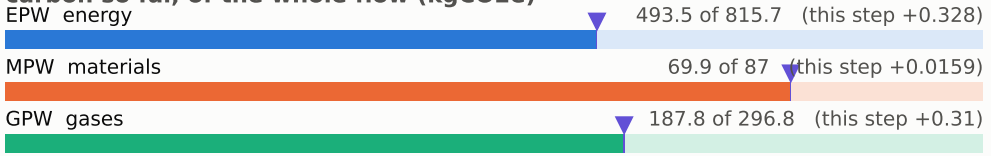

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

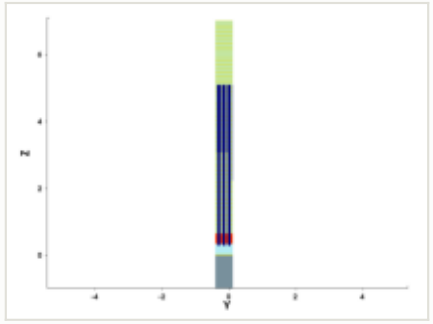

y cut at -0.150 µm

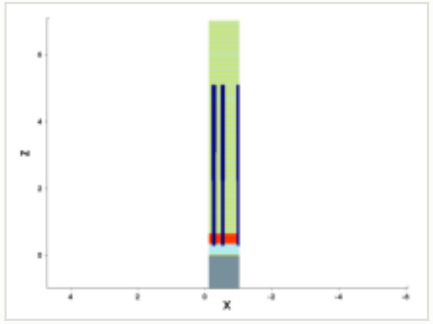

mask for this step

no mask for this step

steps by process area

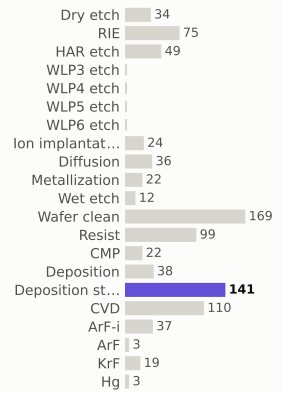

materials deposited (g)

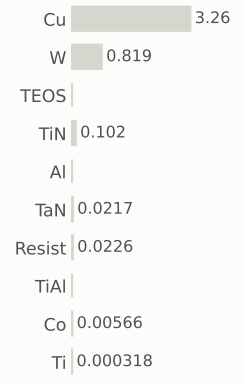

gases emitted (g)

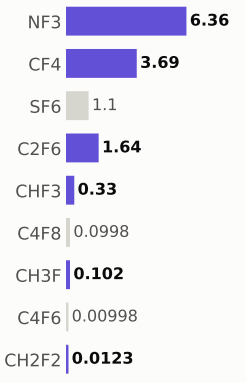

Step #17510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	751.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

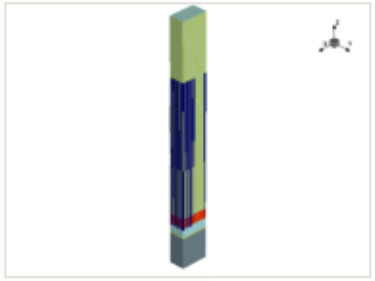

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

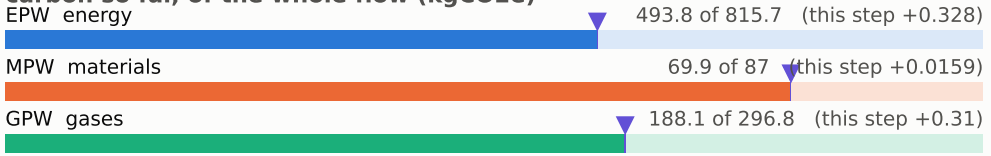

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

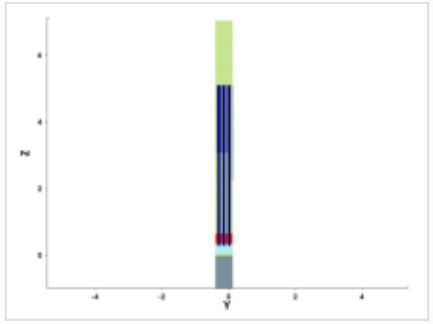

y cut at -0.150 µm

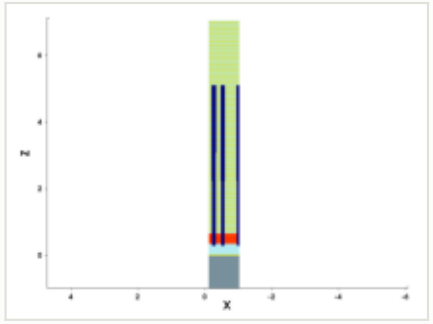

mask for this step

no mask for this step

steps by process area

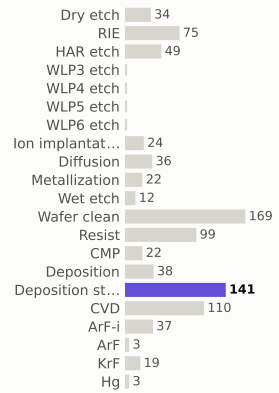

materials deposited (g)

gases emitted (g)

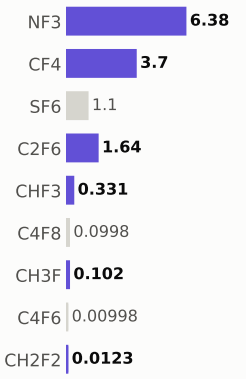

Step #17520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	752.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

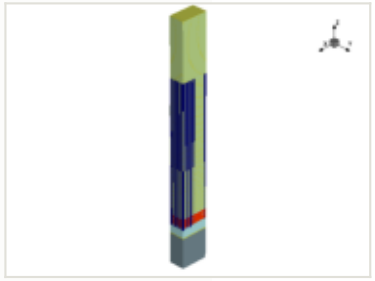

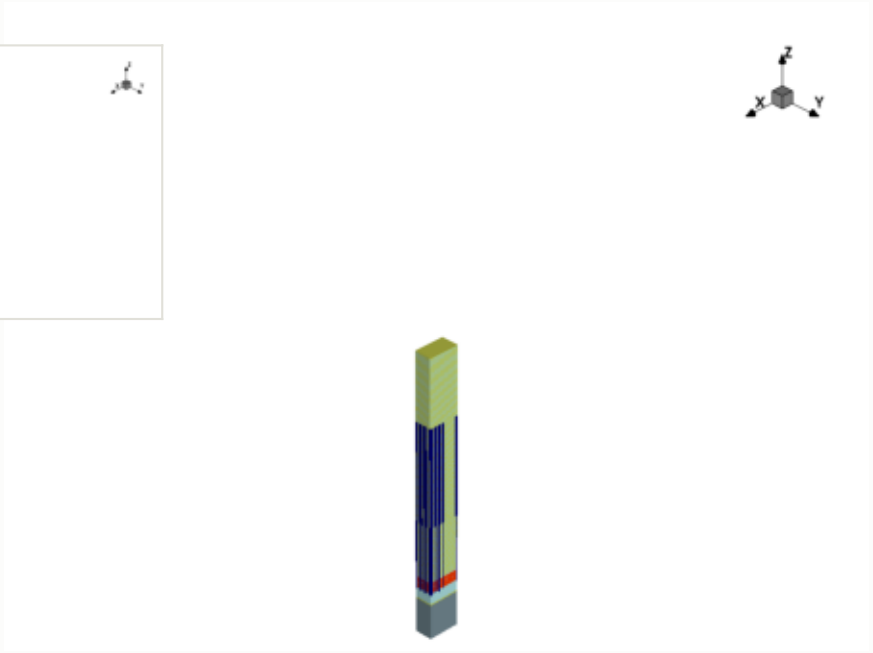

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

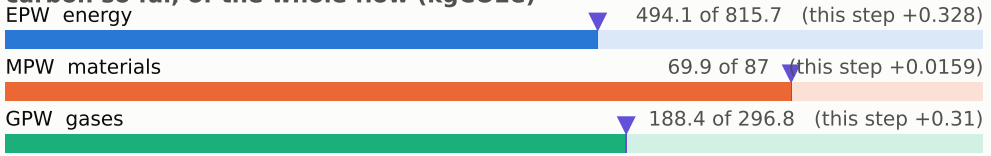

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

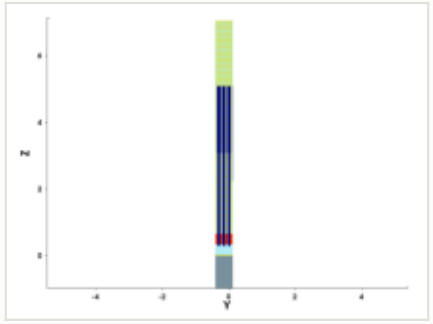

y cut at -0.150 µm

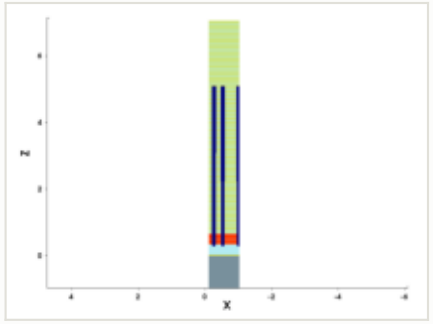

mask for this step

no mask for this step

steps by process area

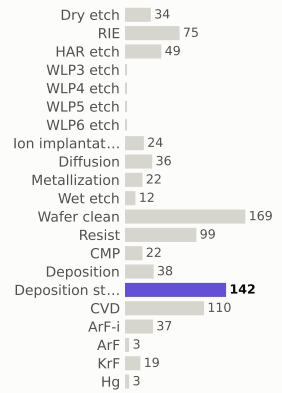

materials deposited (g)

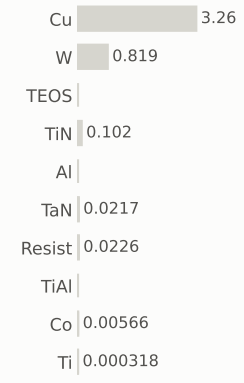

gases emitted (g)

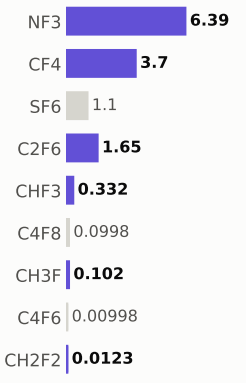

Step #17530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	753.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

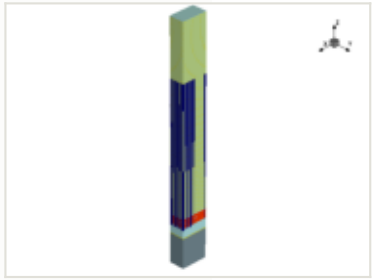

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

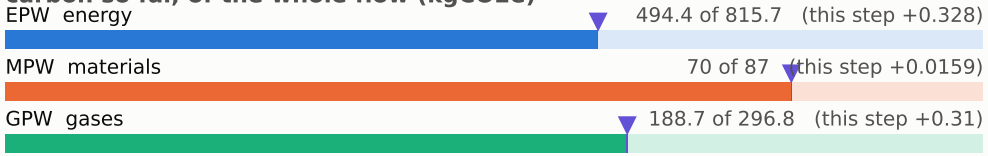

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

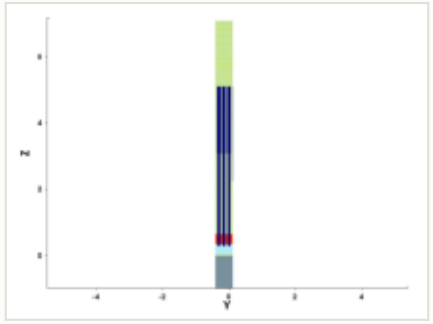

y cut at -0.150 µm

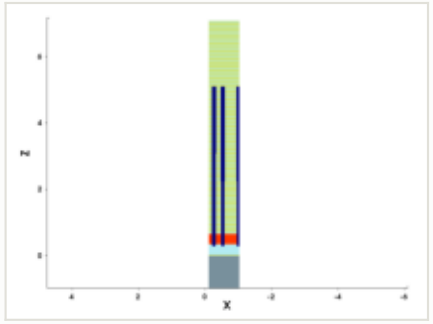

mask for this step

no mask for this step

steps by process area

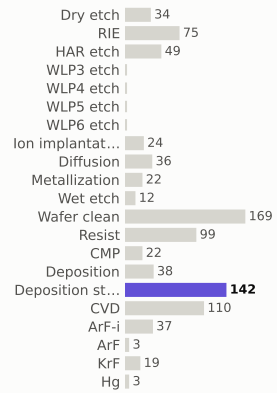

materials deposited (g)

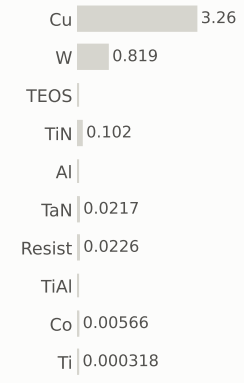

gases emitted (g)

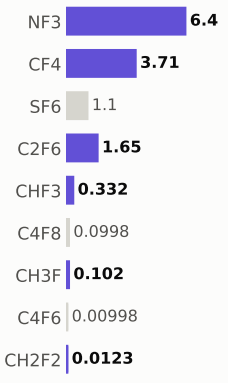

Step #17540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	753.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

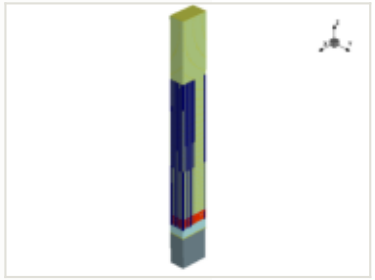

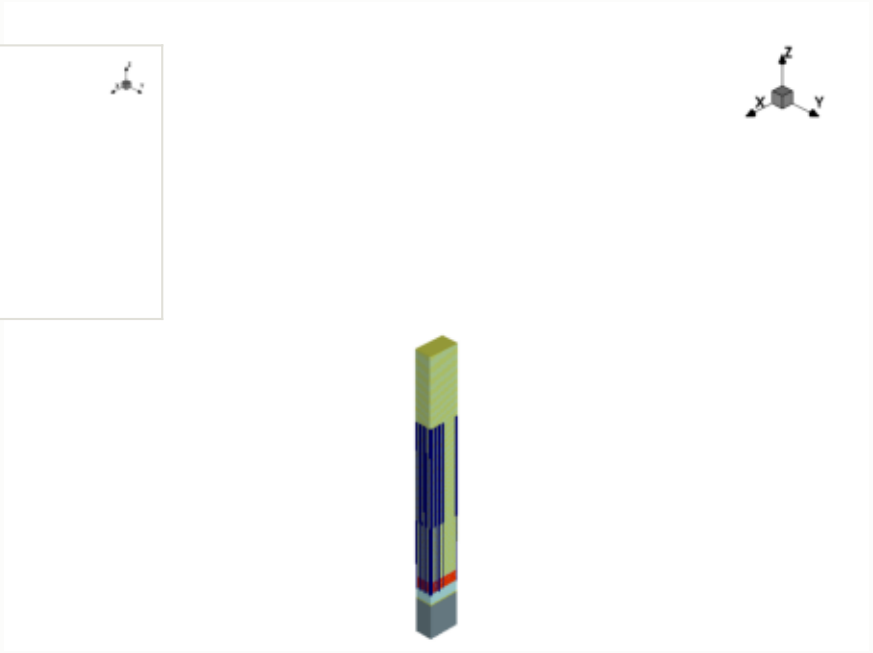

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

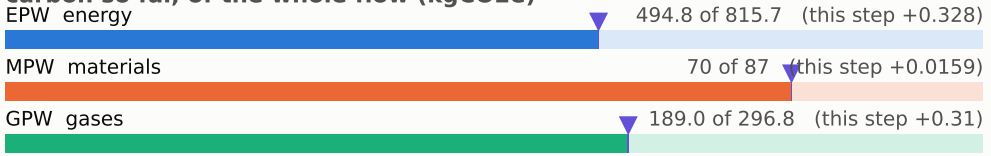

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

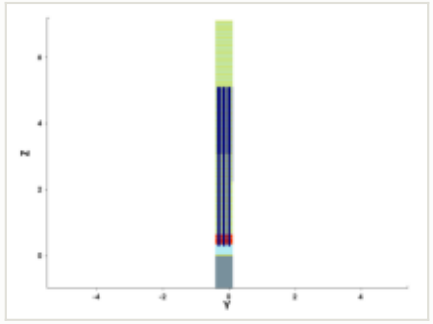

y cut at -0.150 µm

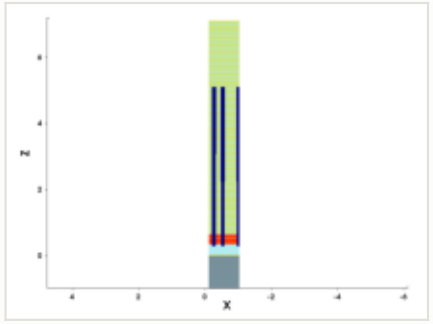

mask for this step

no mask for this step

steps by process area

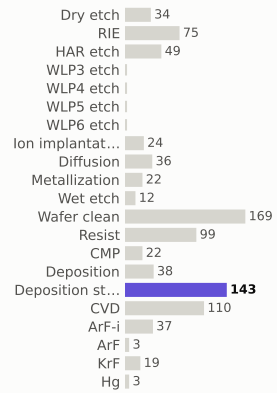

materials deposited (g)

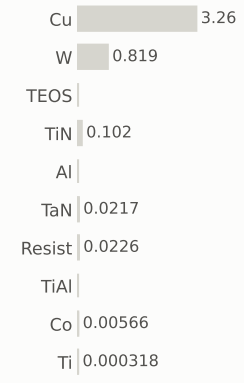

gases emitted (g)

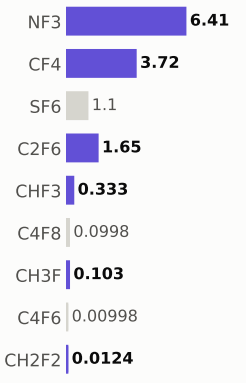

Step #17550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	754.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

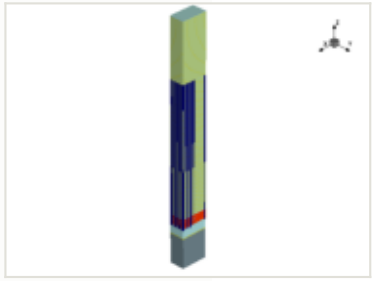

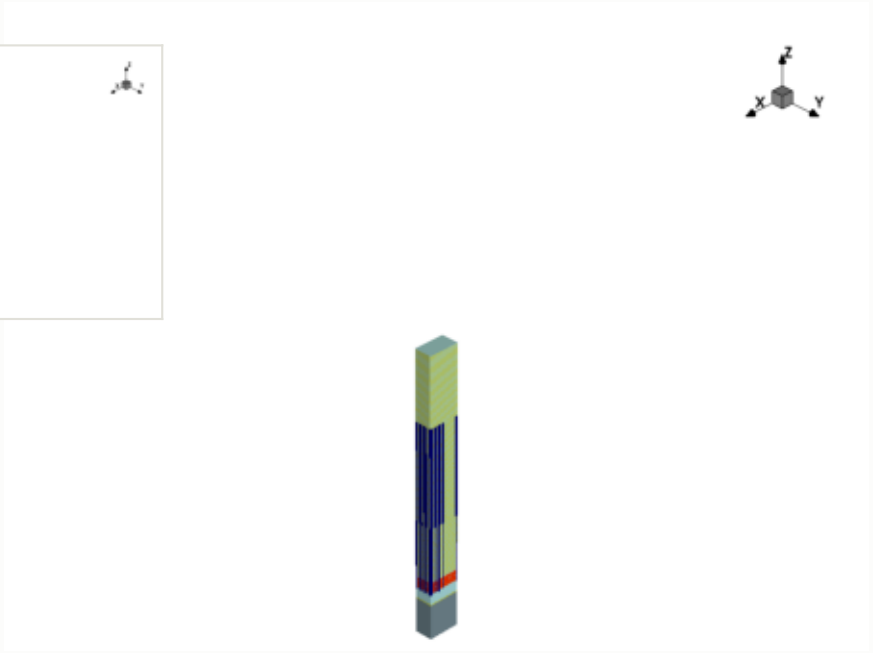

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

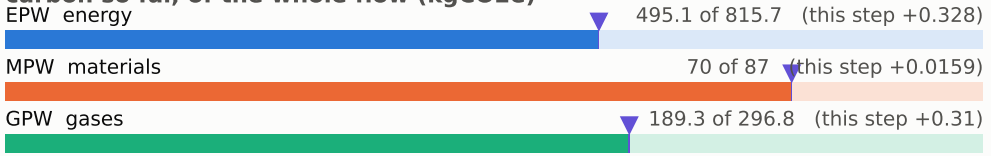

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

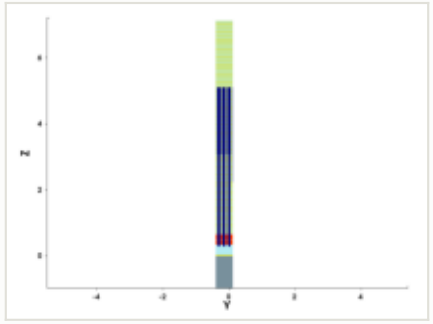

y cut at -0.150 µm

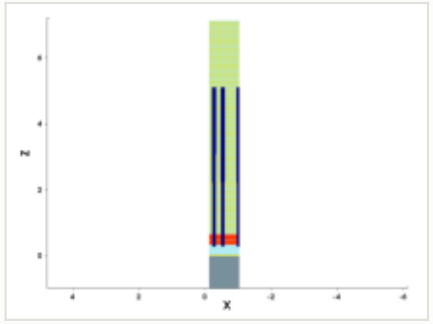

mask for this step

no mask for this step

steps by process area

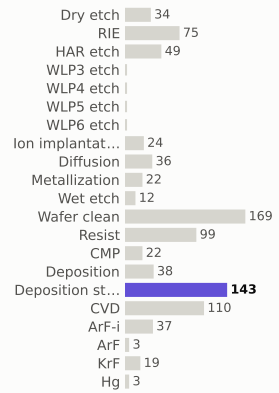

materials deposited (g)

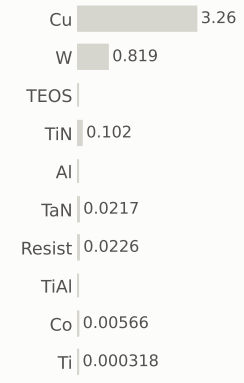

gases emitted (g)

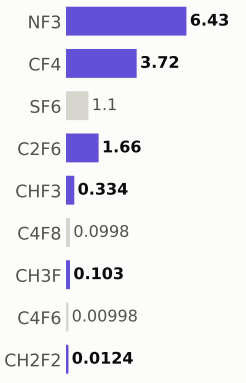

Step #17560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	755.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

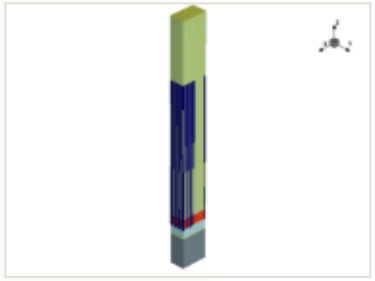

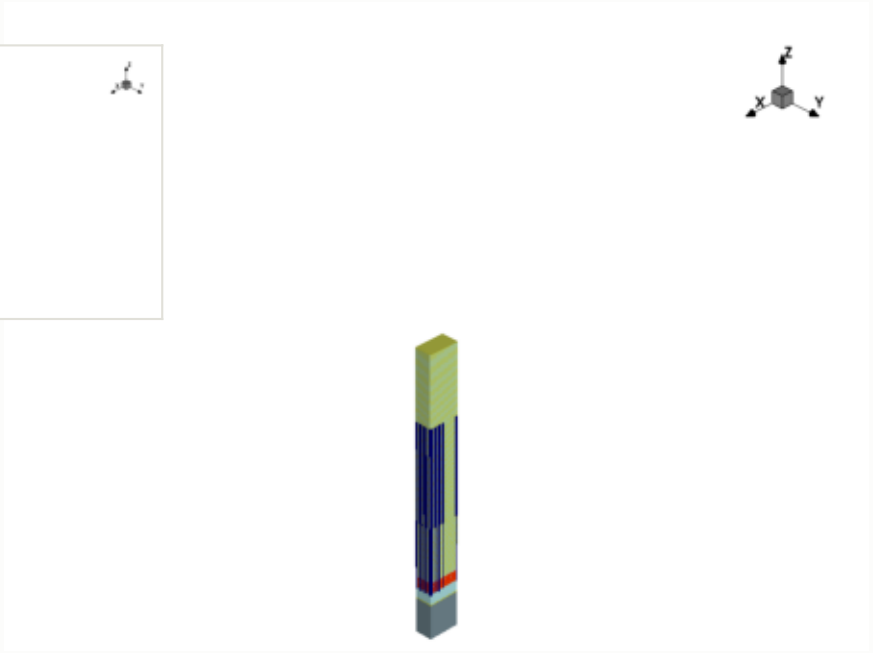

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

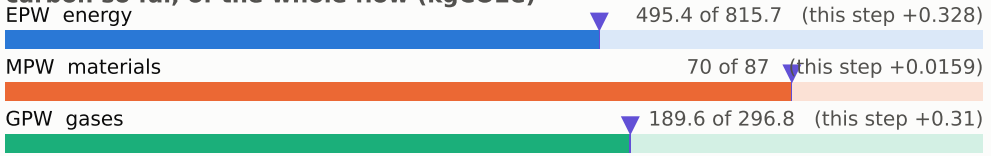

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

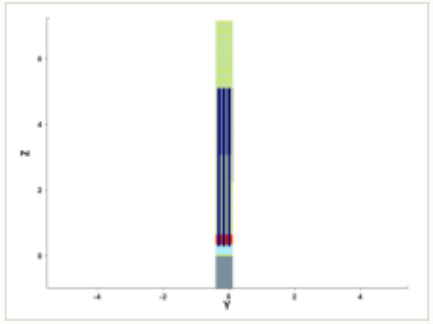

y cut at -0.150 µm

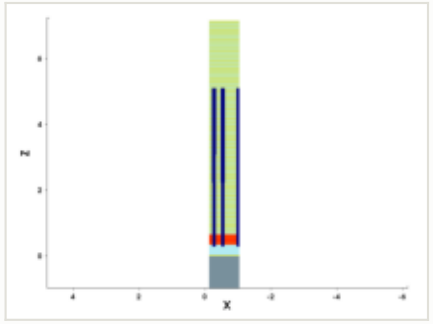

mask for this step

no mask for this step

steps by process area

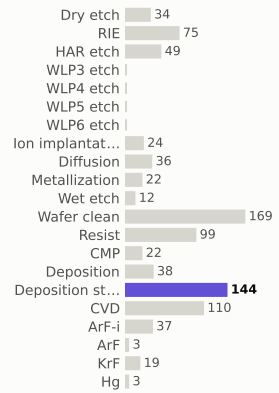

materials deposited (g)

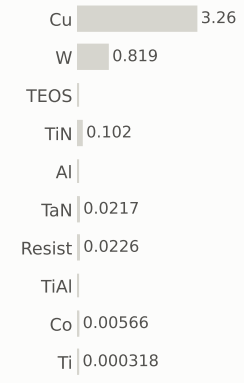

gases emitted (g)

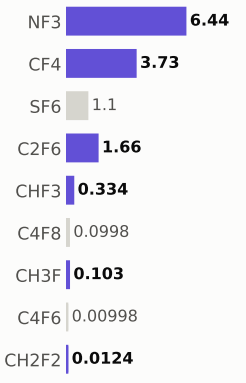

Step #17570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	755.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

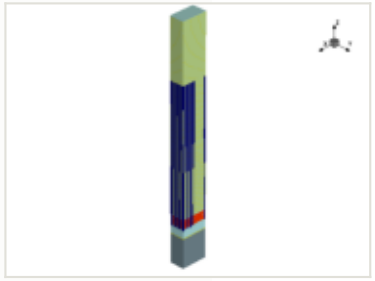

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

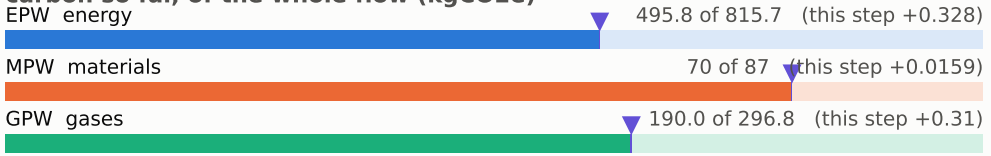

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

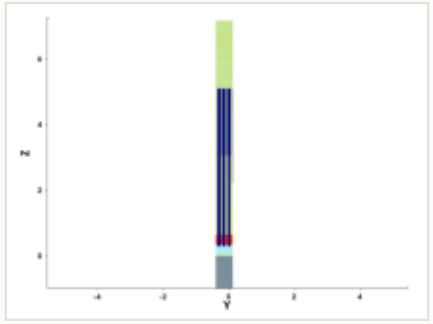

y cut at -0.150 µm

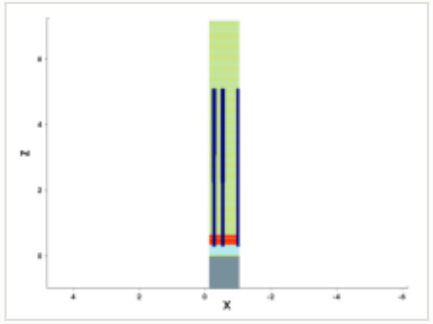

mask for this step

no mask for this step

steps by process area

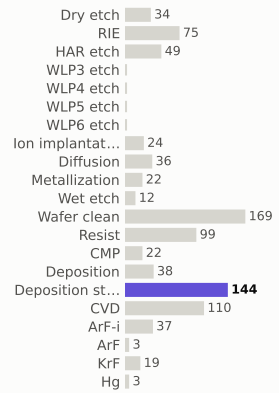

materials deposited (g)

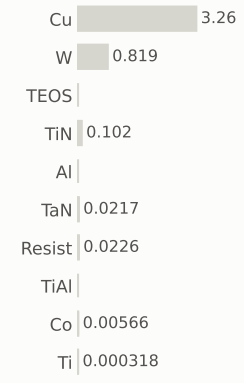

gases emitted (g)

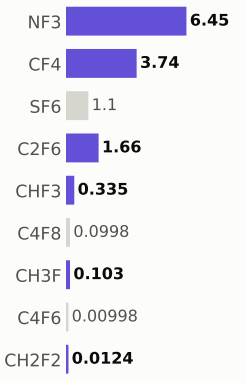

Step #17580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	756.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

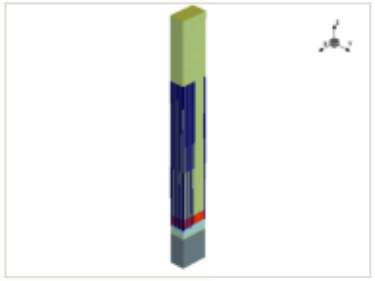

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

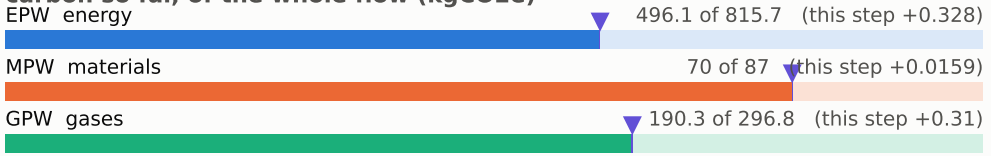

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

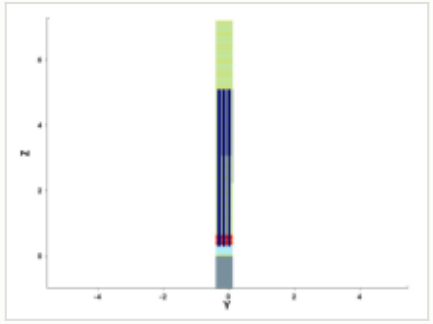

y cut at -0.150 µm

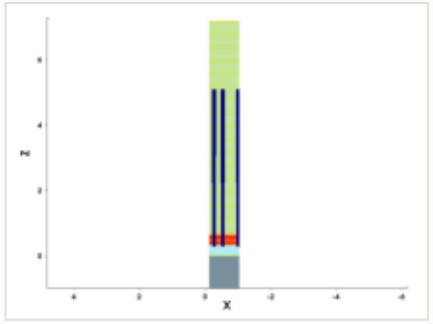

mask for this step

no mask for this step

steps by process area

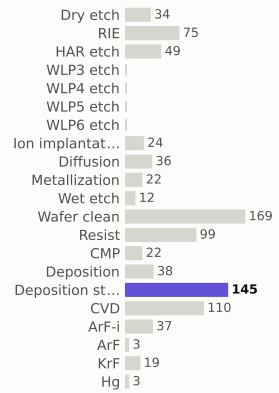

materials deposited (g)

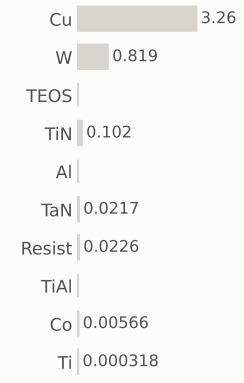

gases emitted (g)

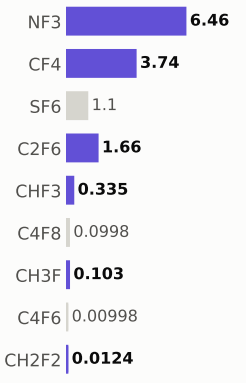

Step #17590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	757.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

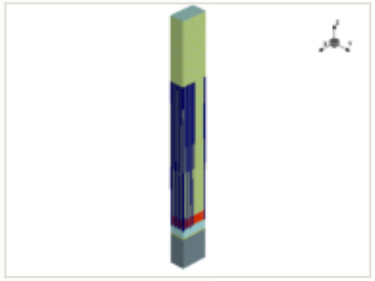

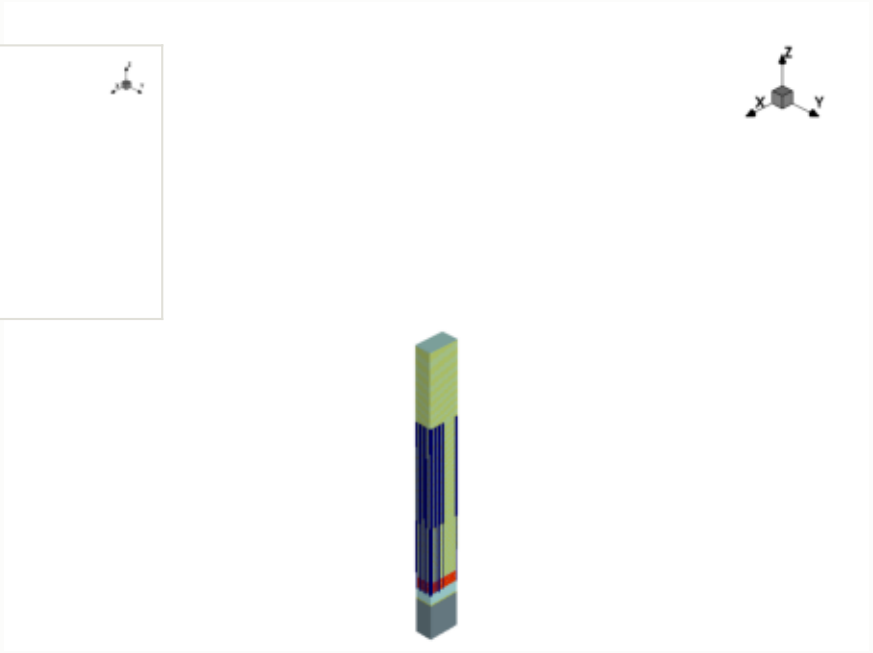

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

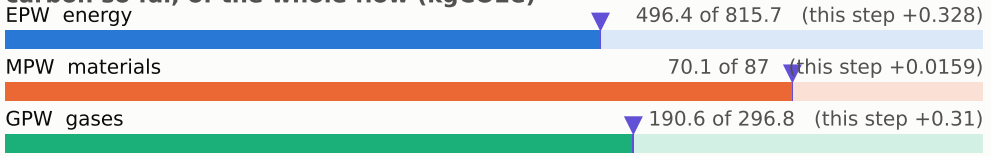

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

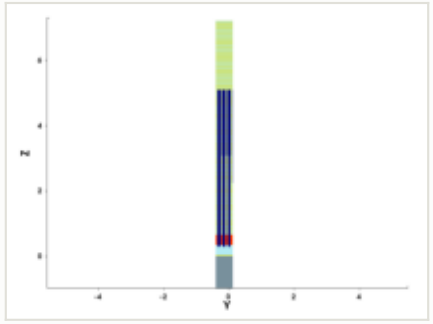

y cut at -0.150 µm

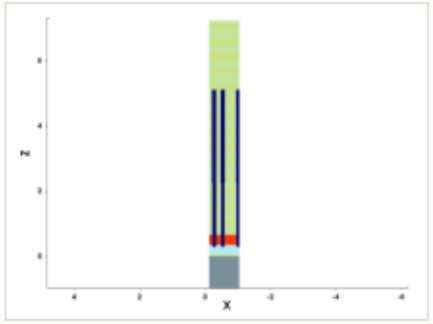

mask for this step

no mask for this step

steps by process area

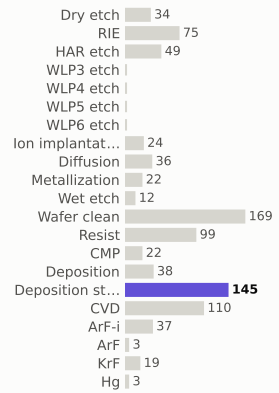

materials deposited (g)

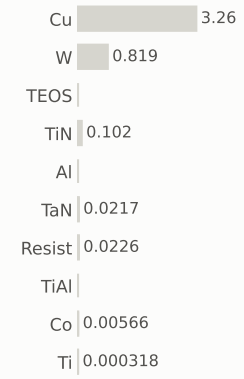

gases emitted (g)

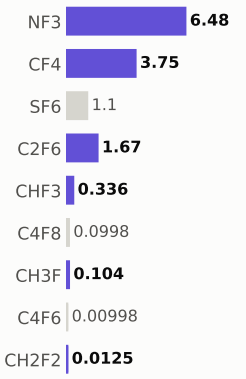

Step #17600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	757.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

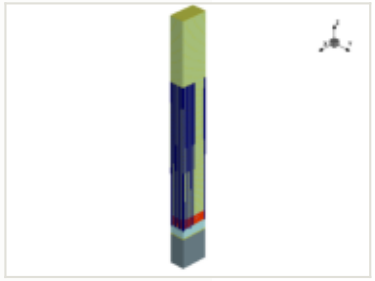

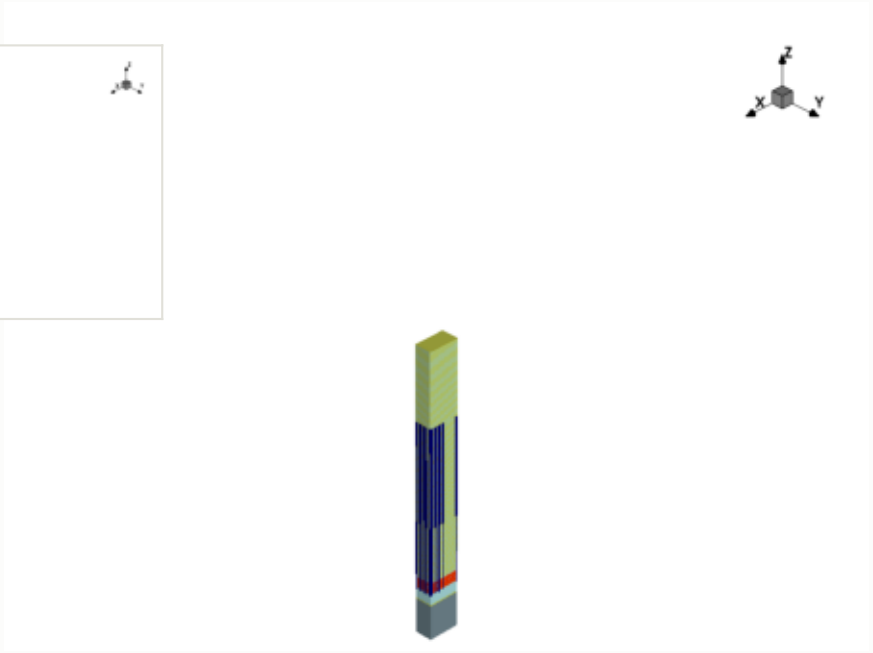

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

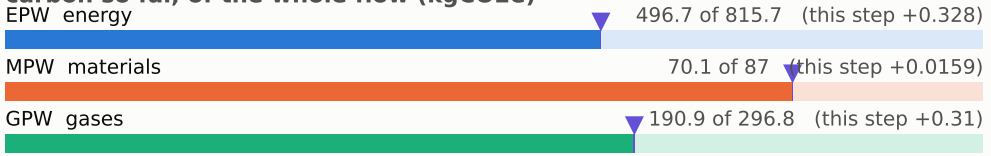

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

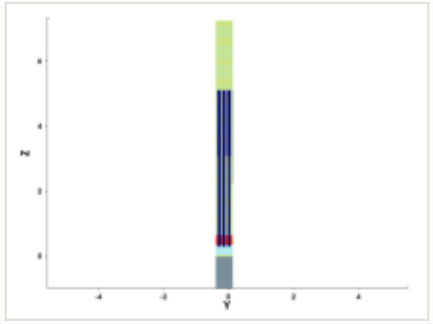

y cut at -0.150 µm

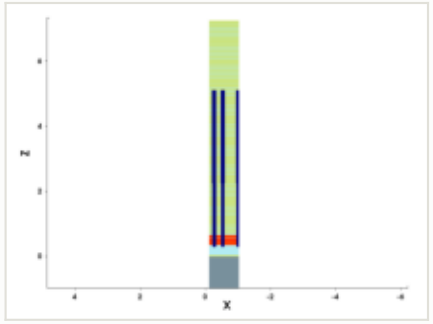

mask for this step

no mask for this step

steps by process area

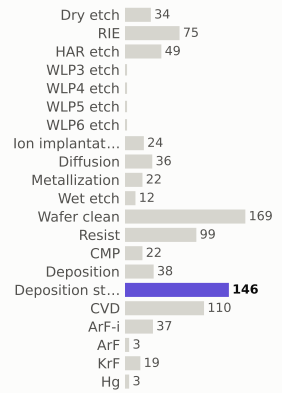

materials deposited (g)

gases emitted (g)

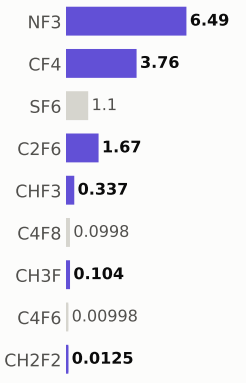

Step #17610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	758.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

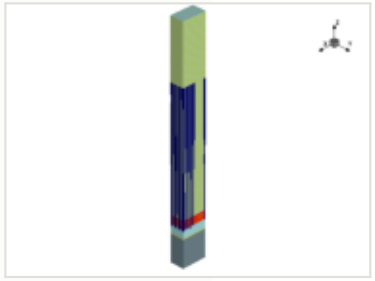

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

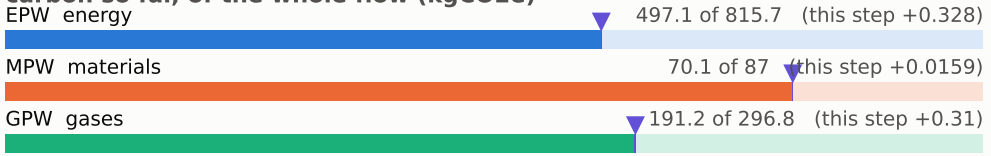

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

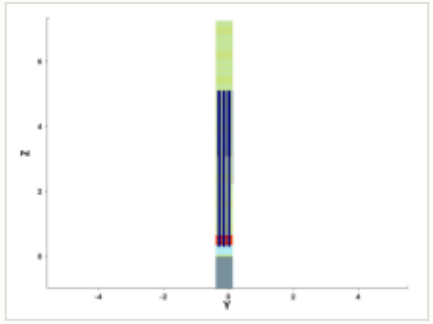

y cut at -0.150 µm

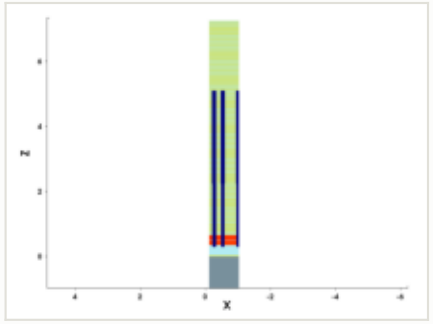

mask for this step

no mask for this step

steps by process area

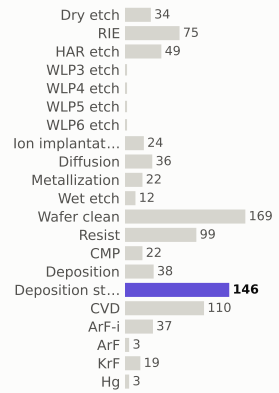

materials deposited (g)

gases emitted (g)

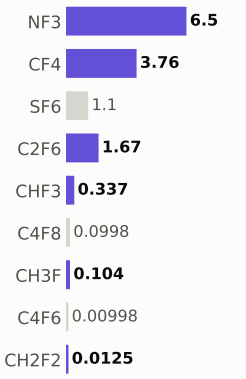

Step #17620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	759.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

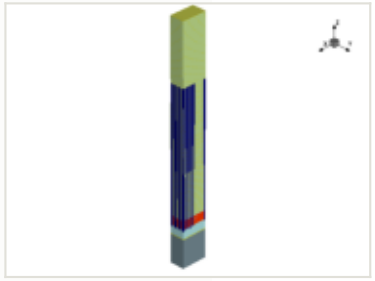

x cut at -0.570 µm

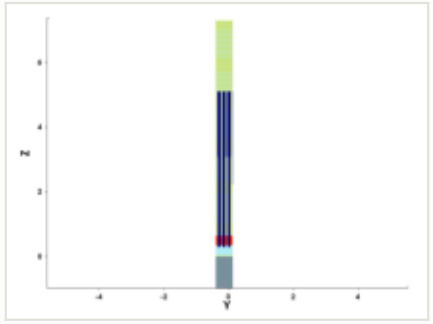

y cut at -0.150 µm

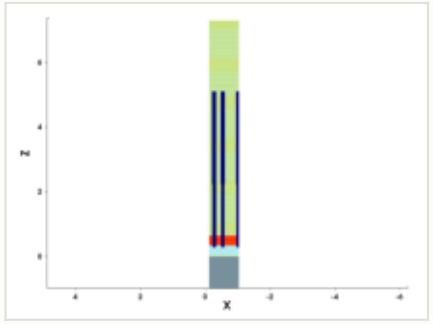

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

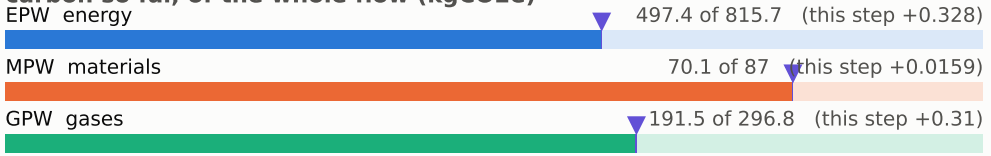

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

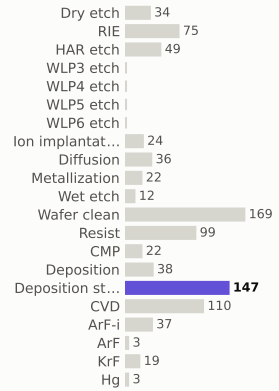

materials deposited (g)

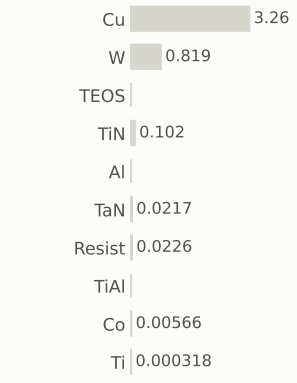

gases emitted (g)

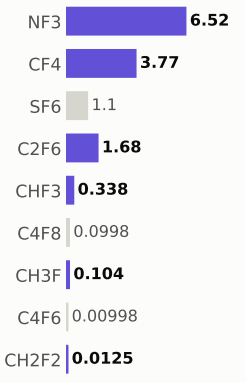

Step #17630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	759.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

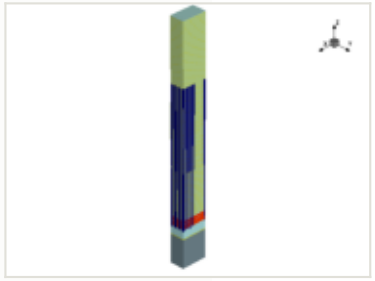

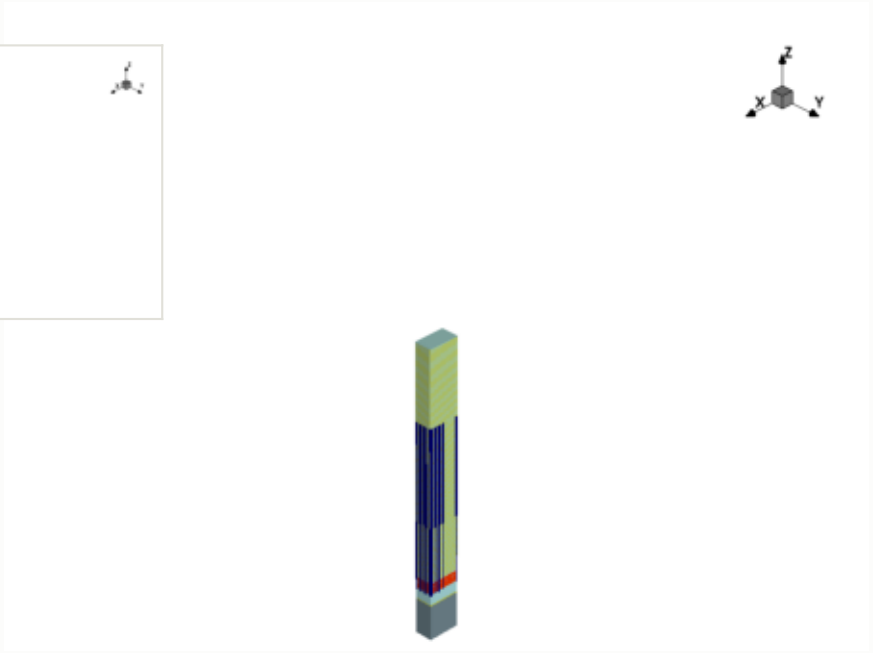

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

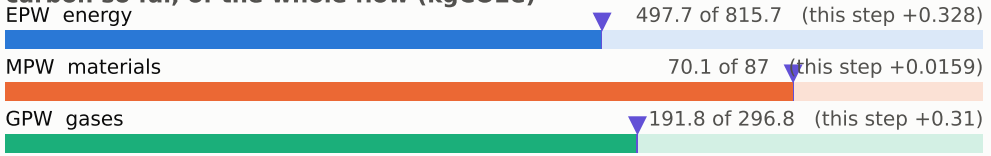

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

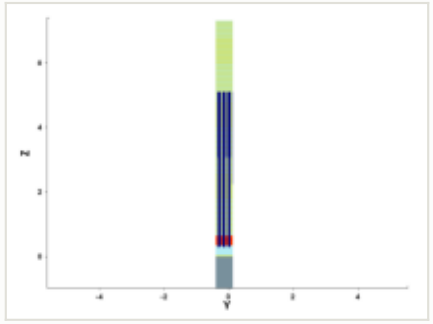

y cut at -0.150 µm

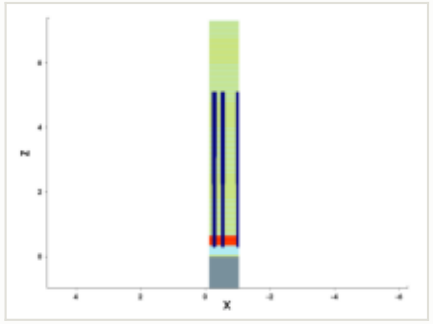

mask for this step

no mask for this step

steps by process area

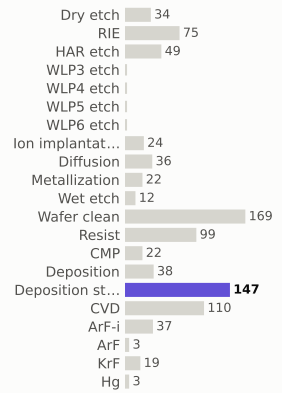

materials deposited (g)

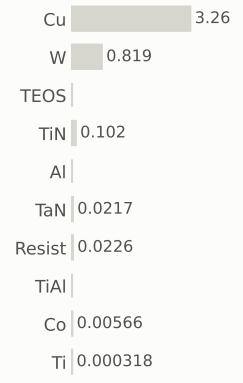

gases emitted (g)

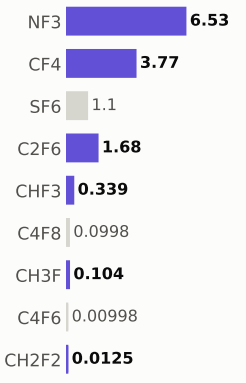

Step #17640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	760.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

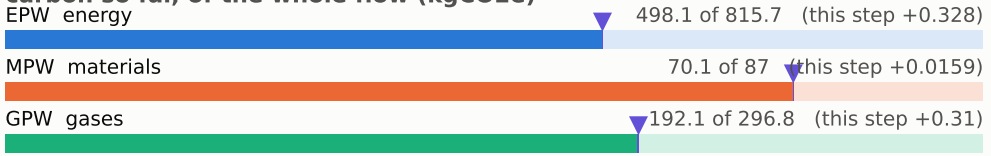

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

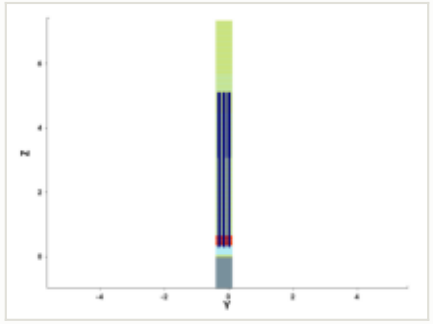

y cut at -0.150 µm

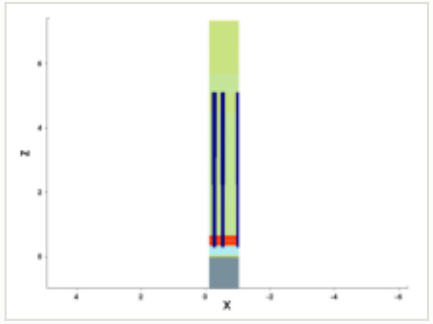

mask for this step

no mask for this step

steps by process area

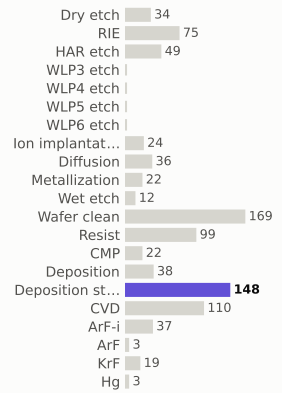

materials deposited (g)

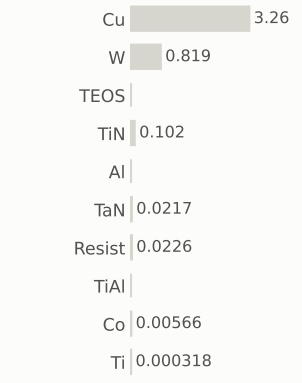

gases emitted (g)

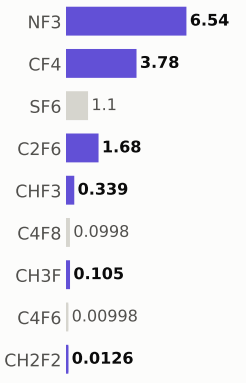

Step #17650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	761.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

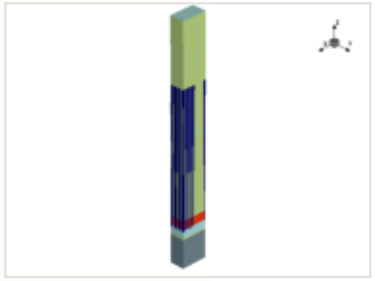

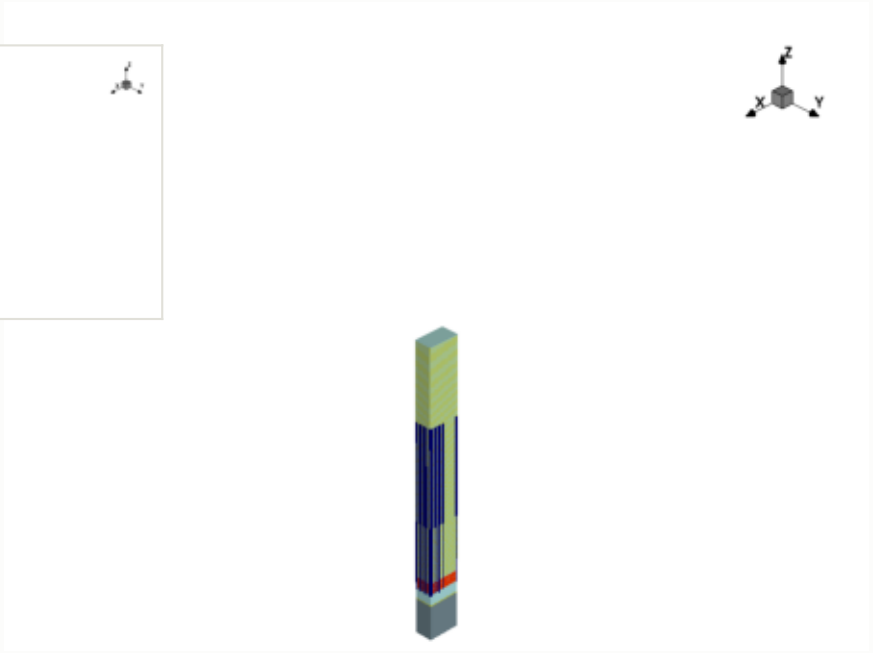

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

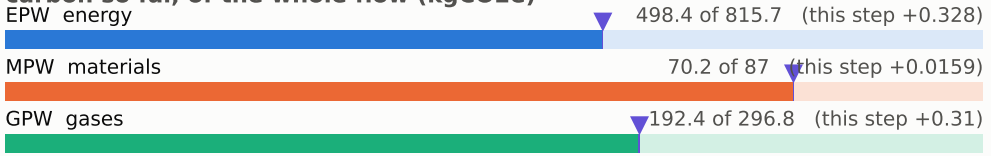

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

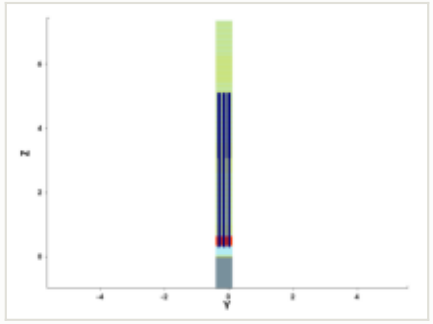

y cut at -0.150 µm

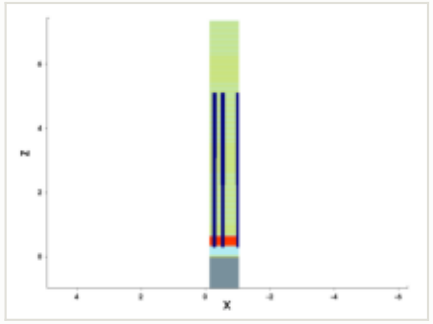

mask for this step

no mask for this step

steps by process area

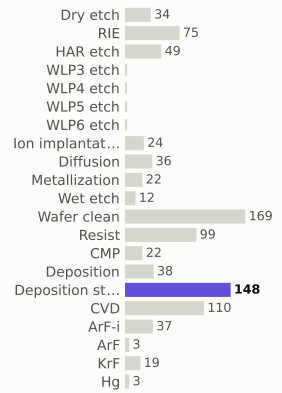

materials deposited (g)

gases emitted (g)

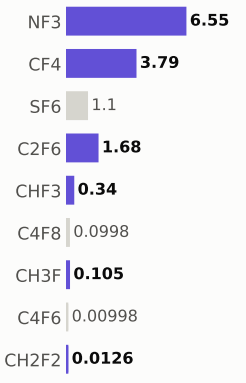

Step #17660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	761.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

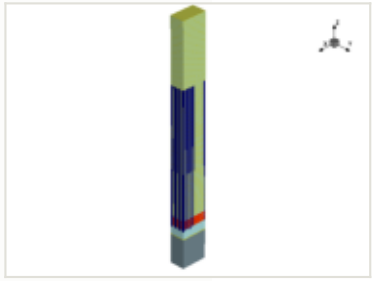

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

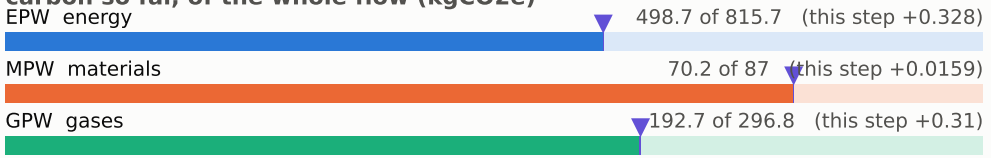

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

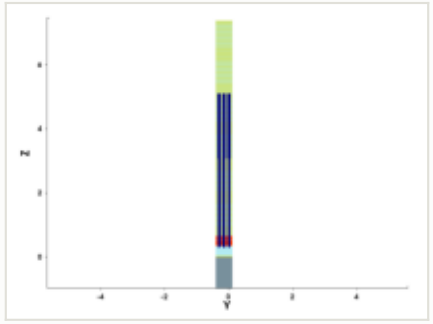

y cut at -0.150 µm

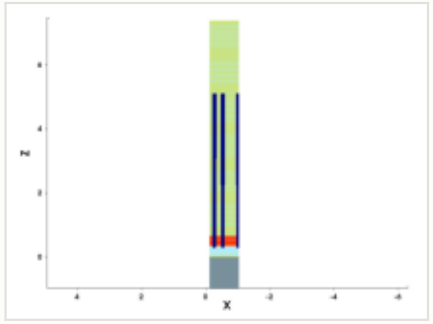

mask for this step

no mask for this step

steps by process area

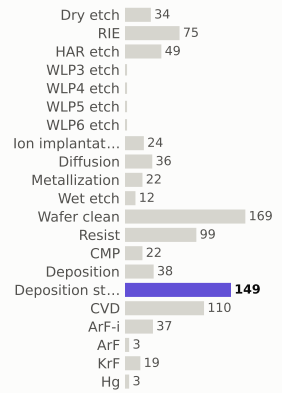

materials deposited (g)

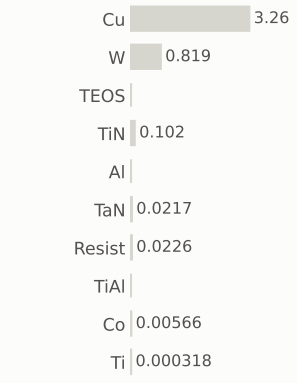

gases emitted (g)

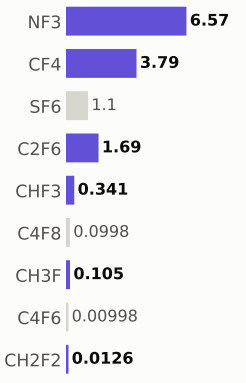

Step #17670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	762.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

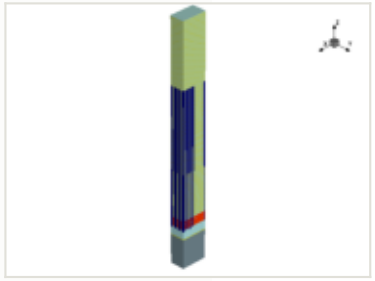

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

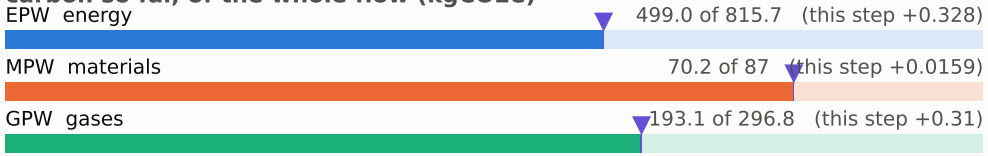

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

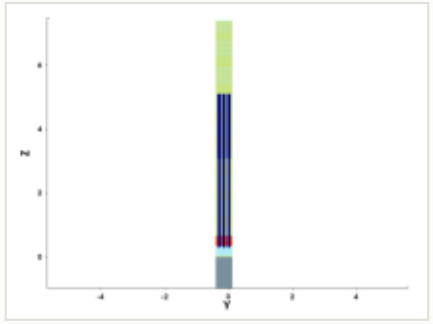

y cut at -0.150 µm

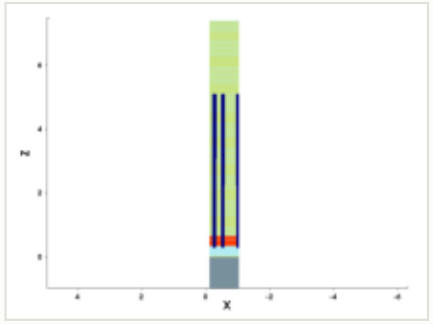

mask for this step

no mask for this step

steps by process area

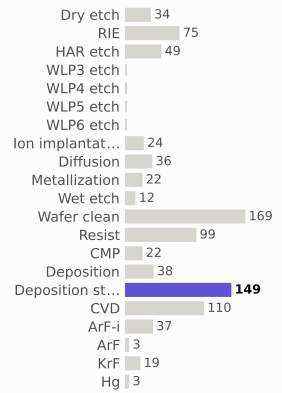

materials deposited (g)

gases emitted (g)

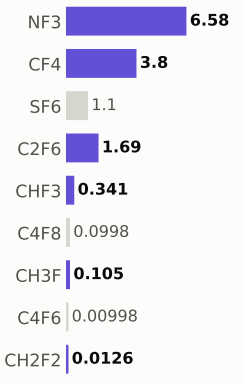

Step #17680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	762.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

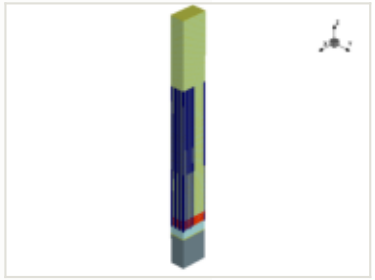

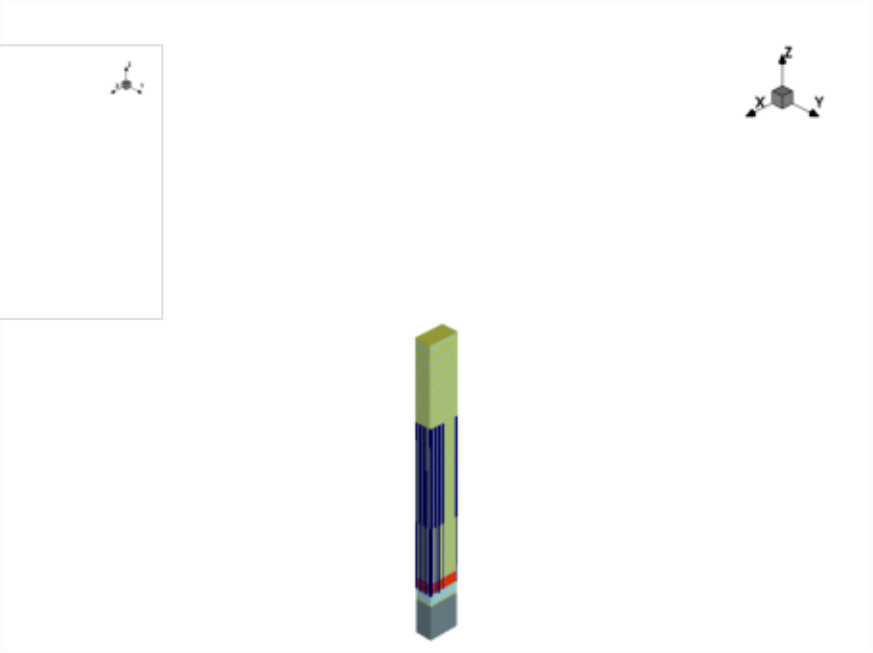

x cut at -0.570 µm

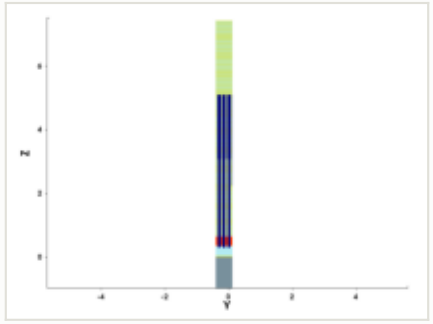

y cut at -0.150 µm

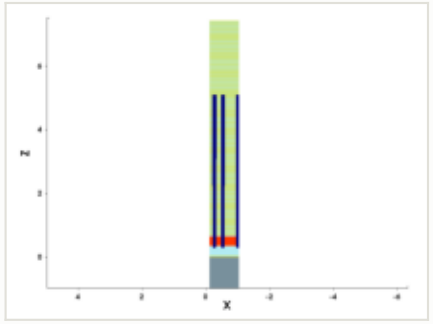

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

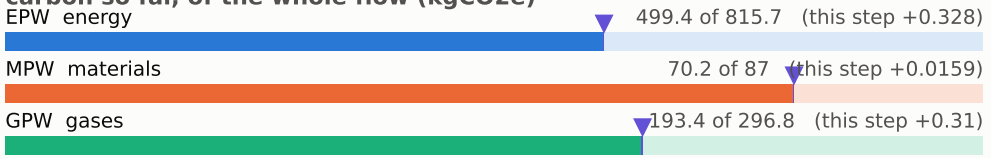

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

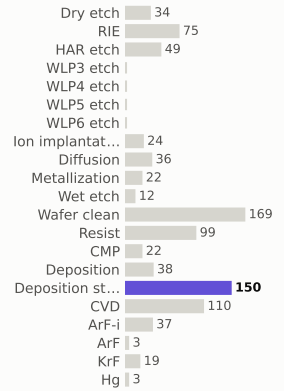

materials deposited (g)

gases emitted (g)

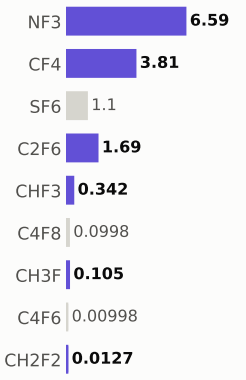

Step #17690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	763.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

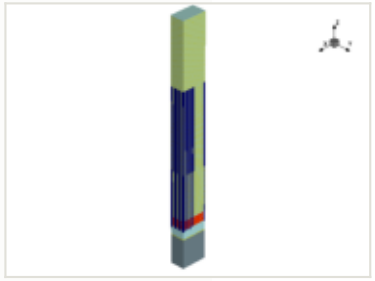

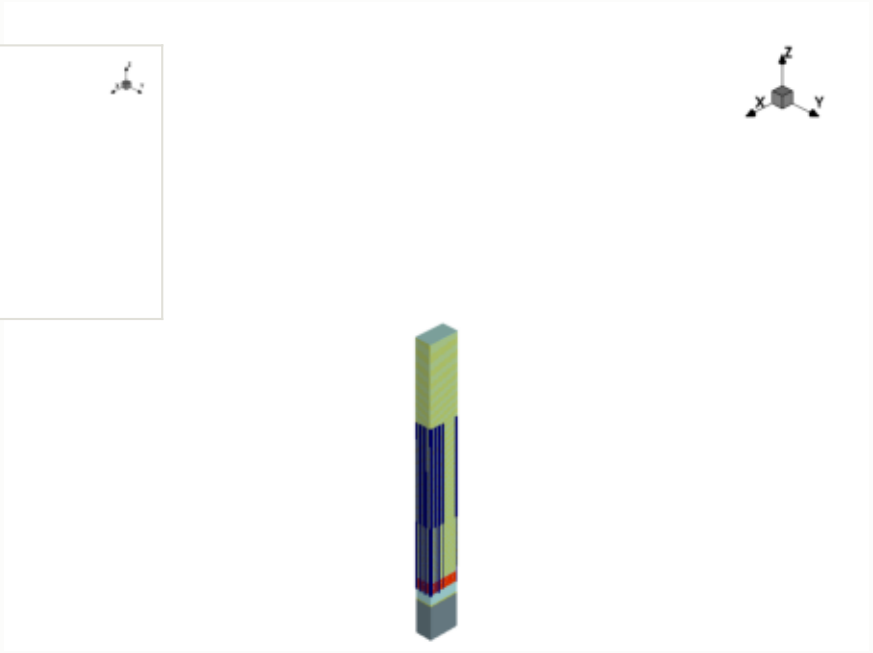

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

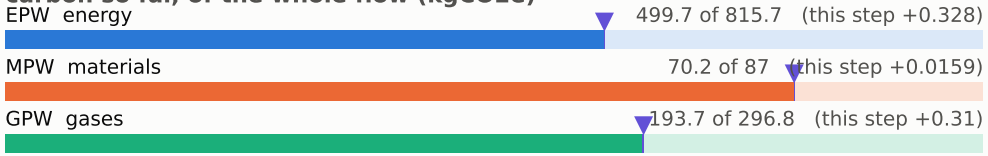

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

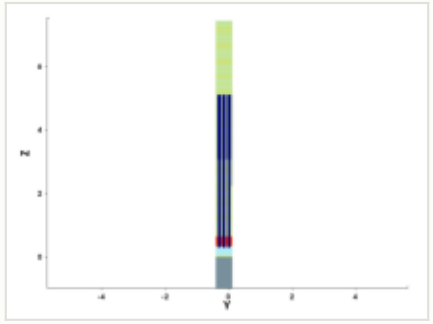

y cut at -0.150 µm

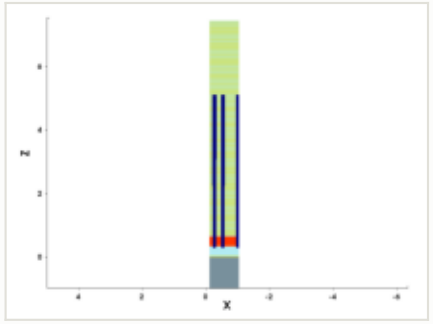

mask for this step

no mask for this step

steps by process area

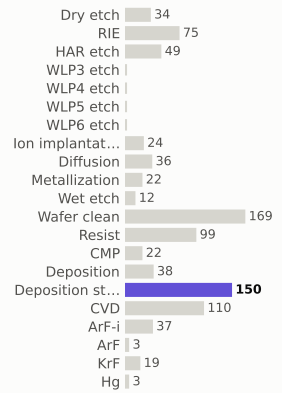

materials deposited (g)

gases emitted (g)

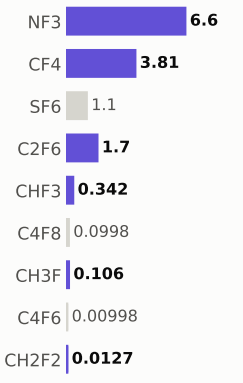

Step #17700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	764.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

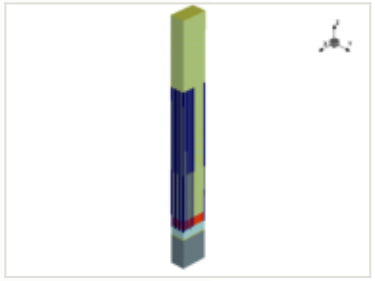

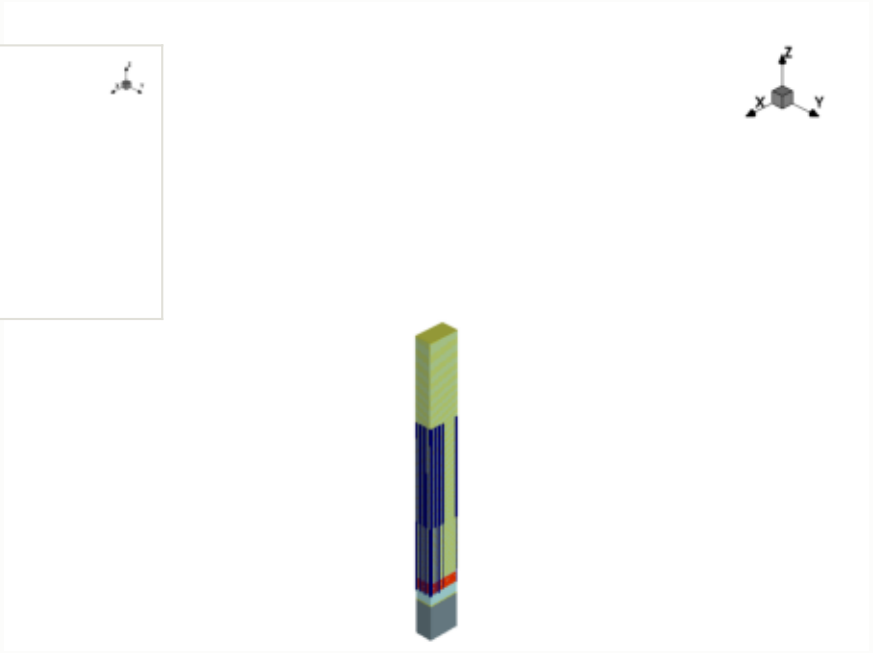

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

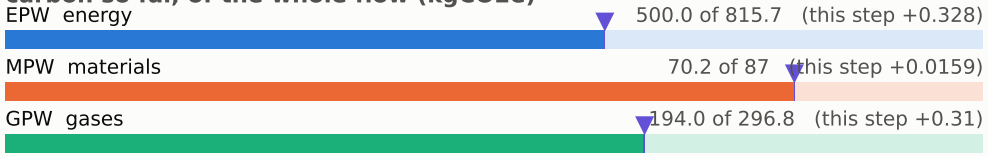

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

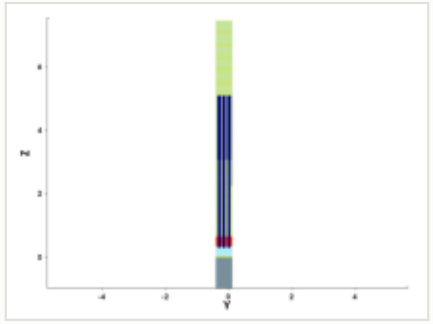

y cut at -0.150 µm

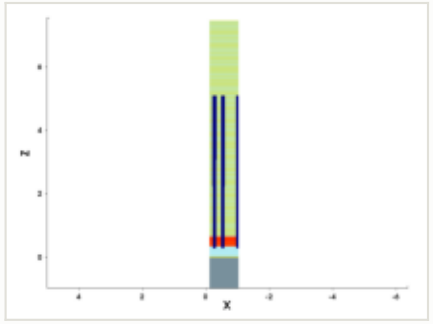

mask for this step

no mask for this step

steps by process area

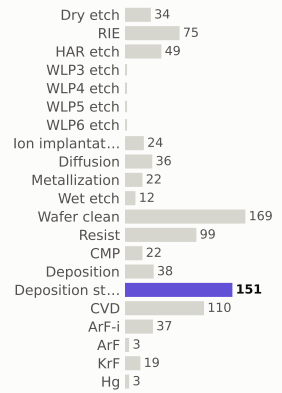

materials deposited (g)

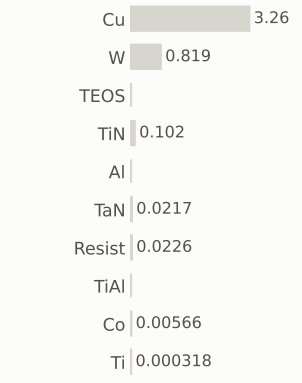

gases emitted (g)

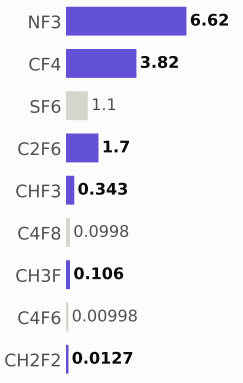

Step #17710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	764.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

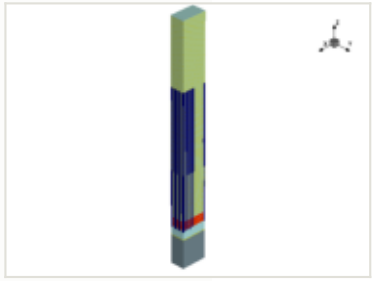

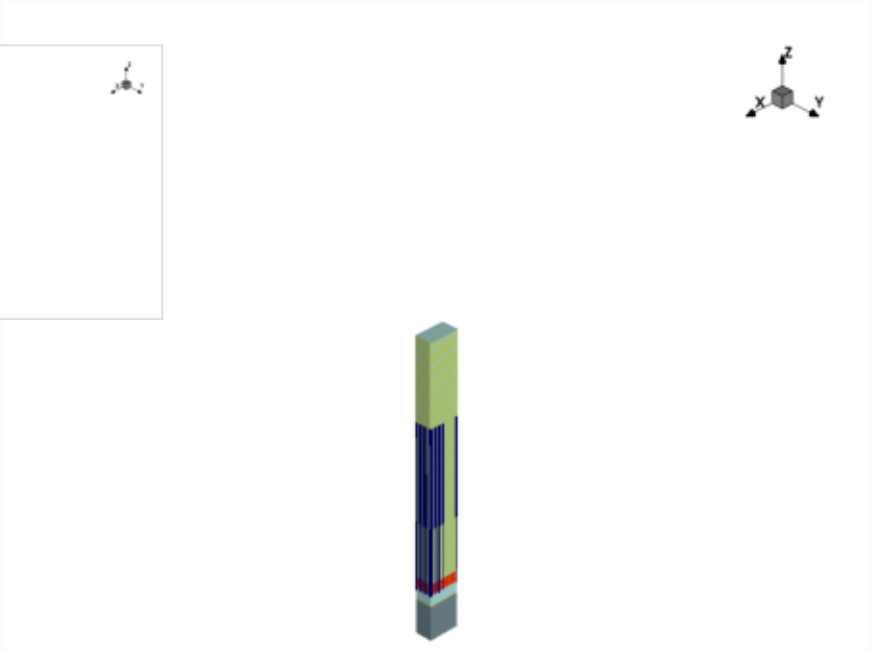

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

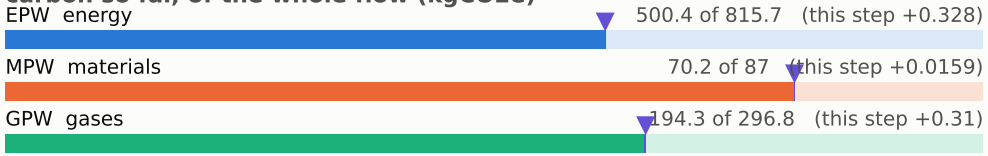

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

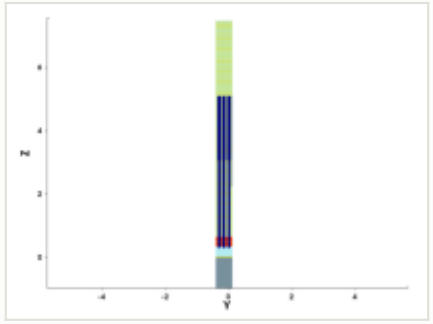

y cut at -0.150 µm

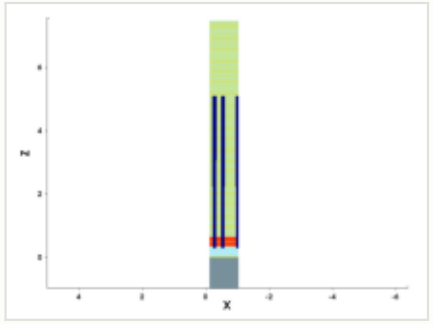

mask for this step

no mask for this step

steps by process area

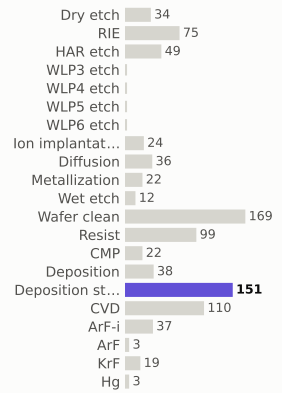

materials deposited (g)

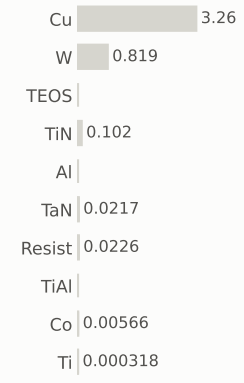

gases emitted (g)

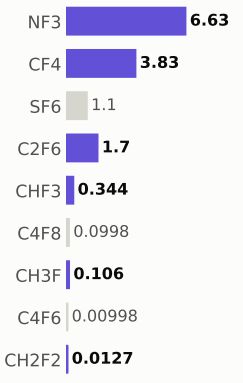

Step #17720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	765.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

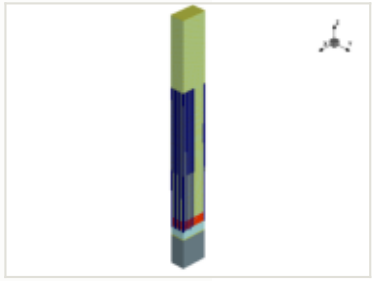

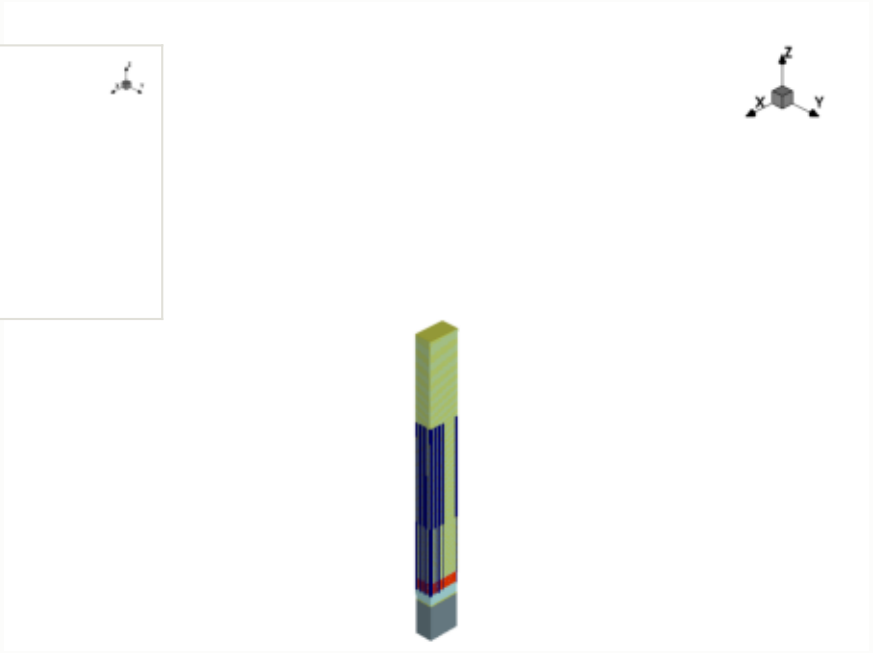

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

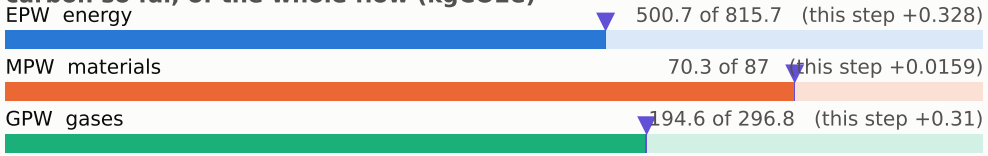

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

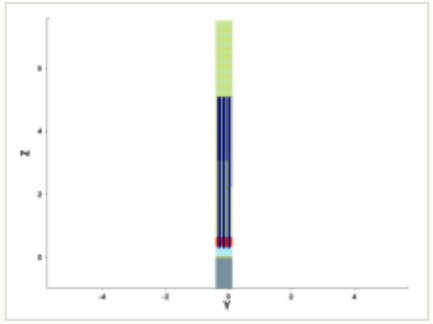

y cut at -0.150 µm

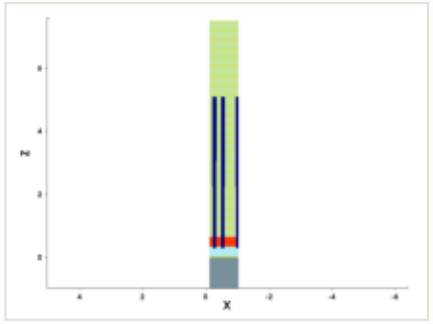

mask for this step

no mask for this step

steps by process area

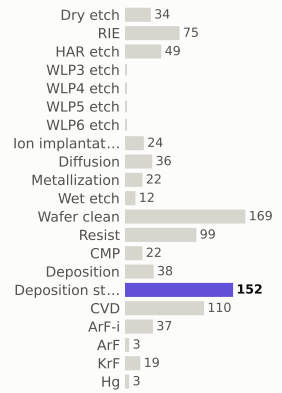

materials deposited (g)

gases emitted (g)

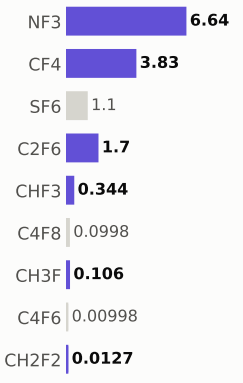

Step #17730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	766.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

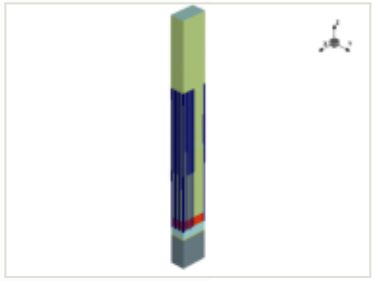

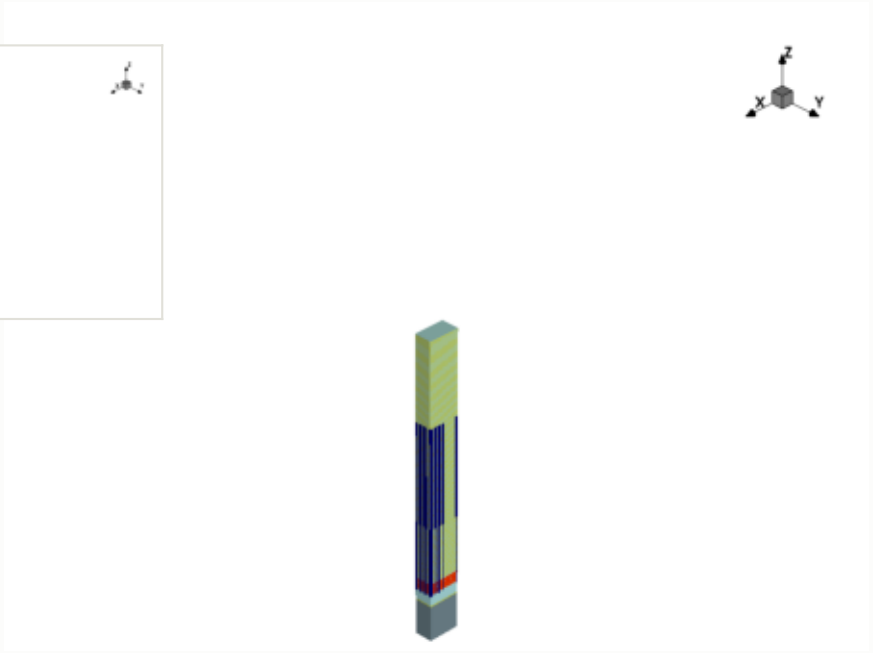

x cut at -0.570 µm

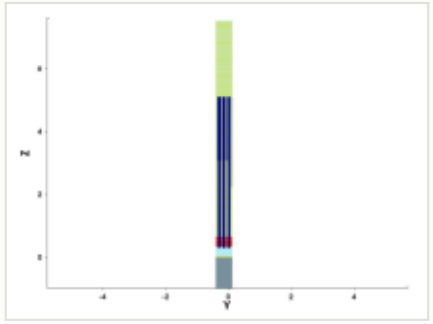

y cut at -0.150 µm

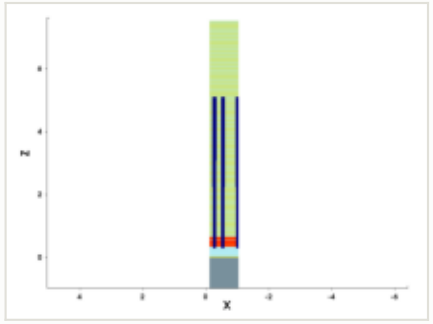

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

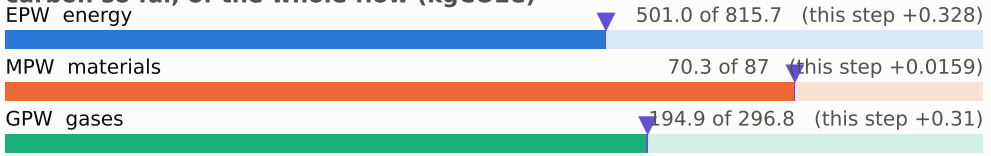

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

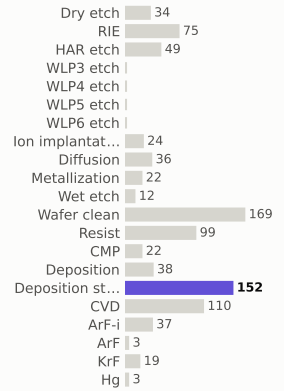

materials deposited (g)

gases emitted (g)

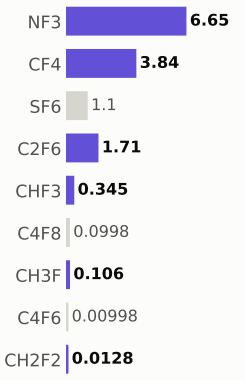

Step #17740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	766.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

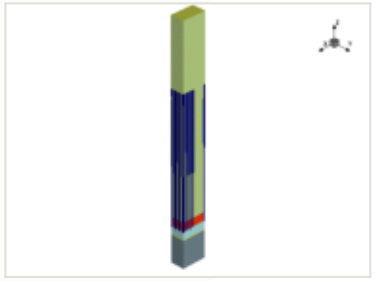

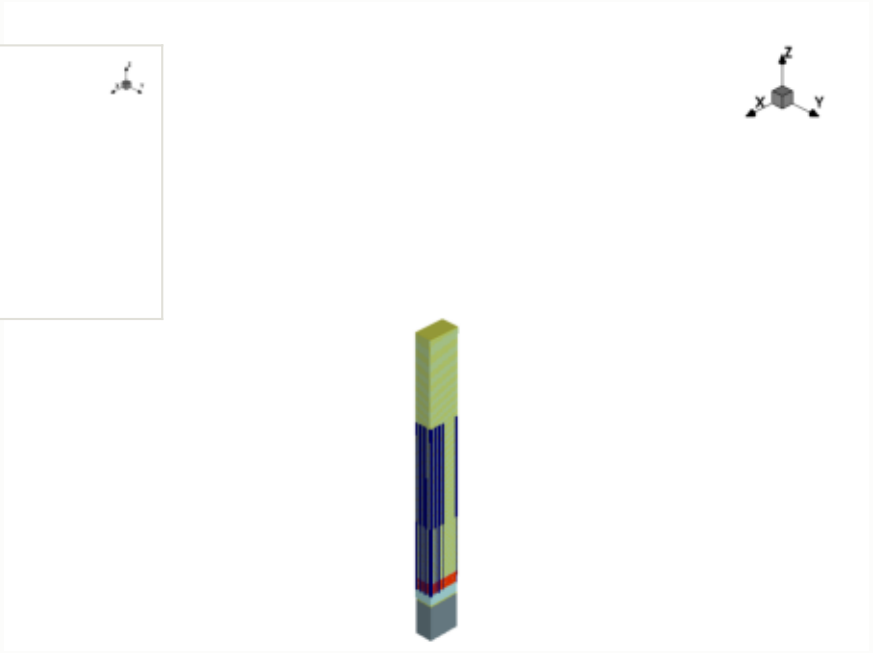

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

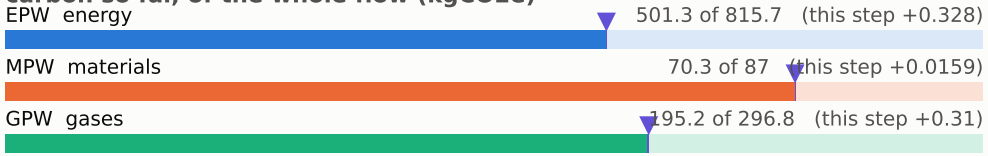

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

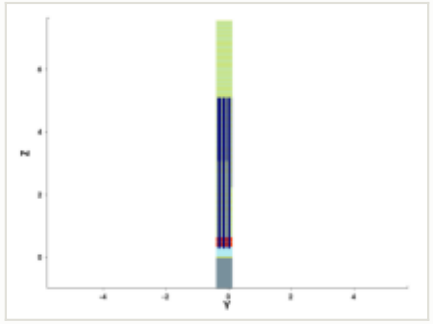

y cut at -0.150 µm

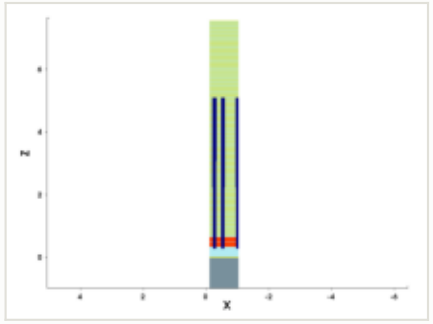

mask for this step

no mask for this step

steps by process area

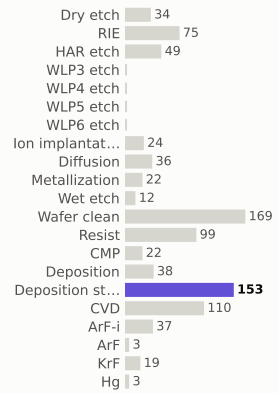

materials deposited (g)

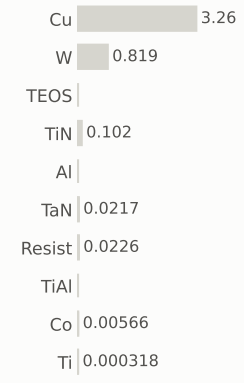

gases emitted (g)

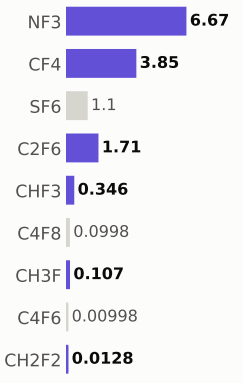

Step #17750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	767.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

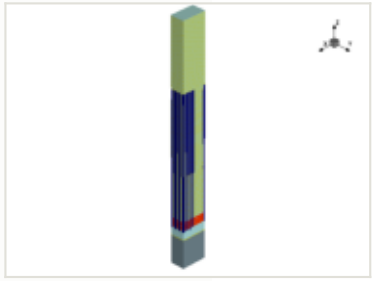

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

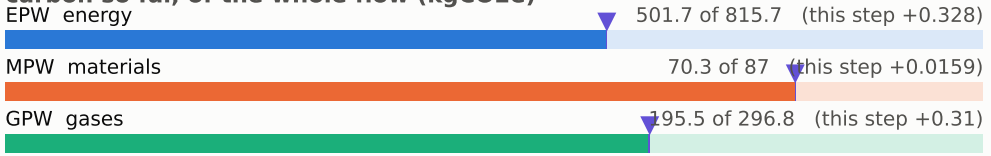

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

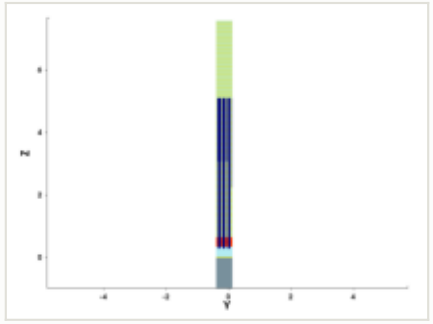

y cut at -0.150 µm

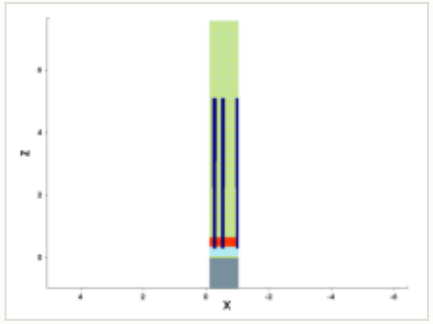

mask for this step

no mask for this step

steps by process area

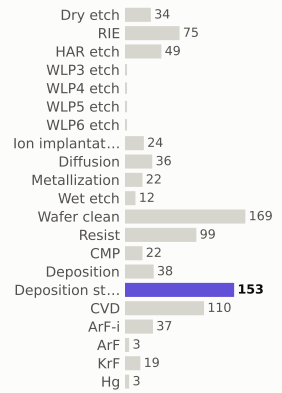

materials deposited (g)

gases emitted (g)

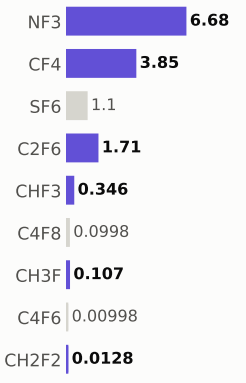

Step #17760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	768.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

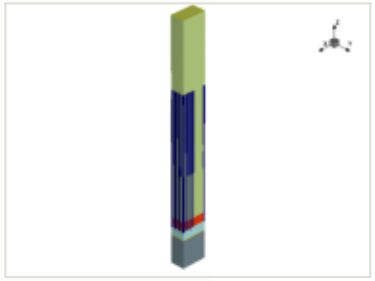

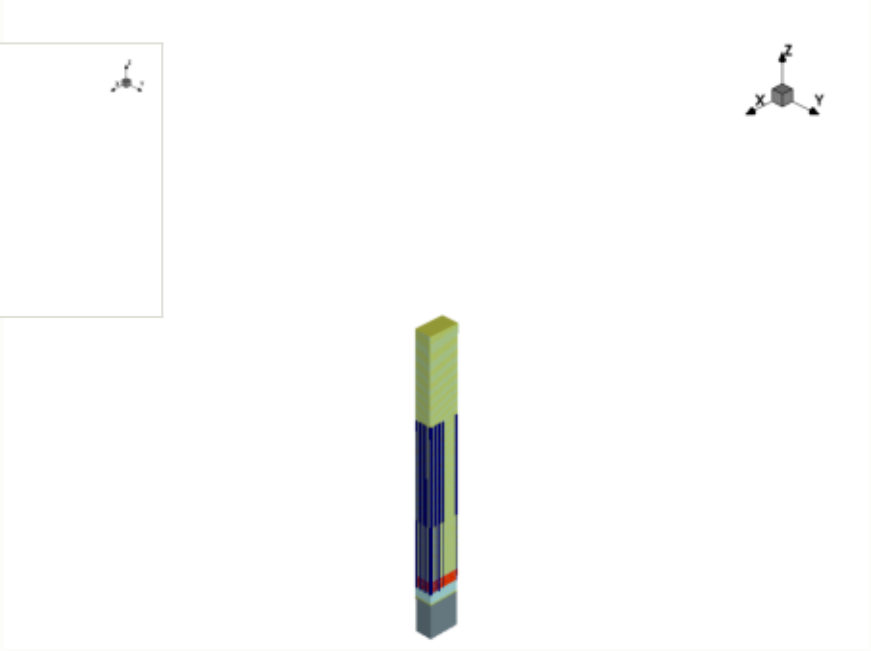

x cut at -0.570 µm

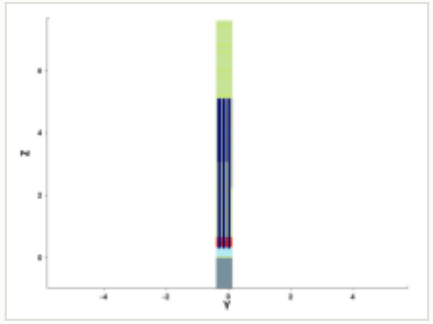

y cut at -0.150 µm

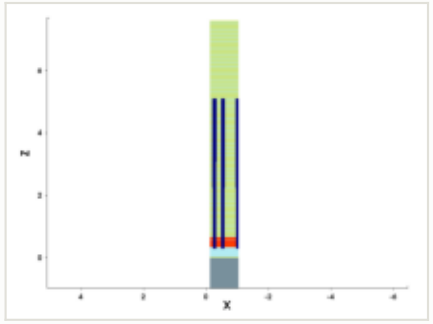

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

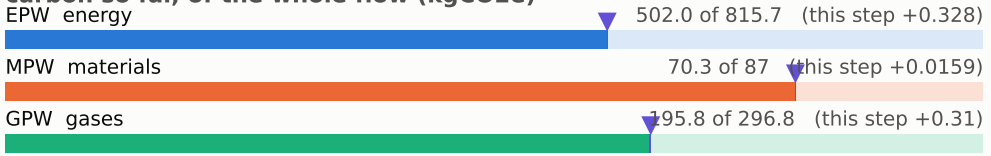

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

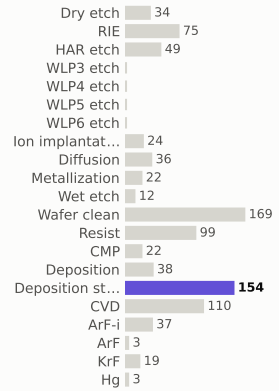

materials deposited (g)

gases emitted (g)

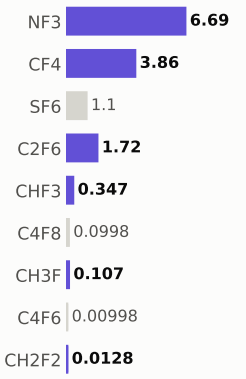

Step #17770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	768.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

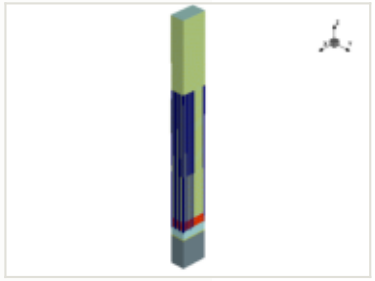

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

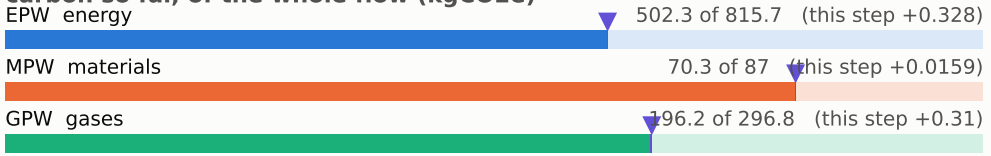

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

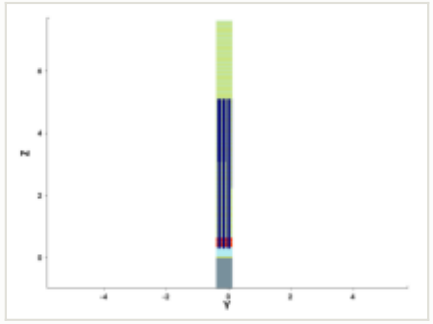

y cut at -0.150 µm

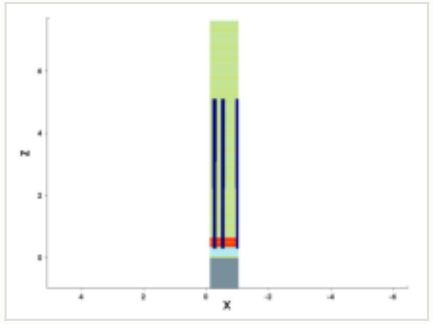

mask for this step

no mask for this step

steps by process area

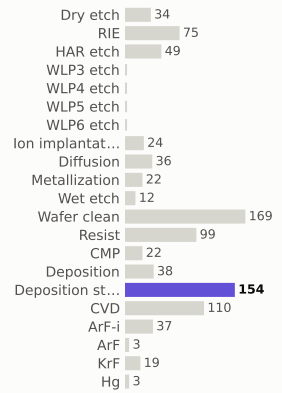

materials deposited (g)

gases emitted (g)

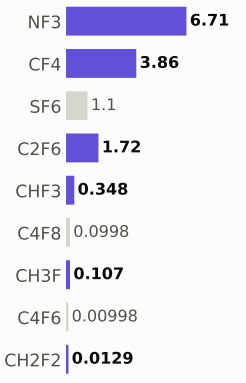

Step #17780: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	769.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

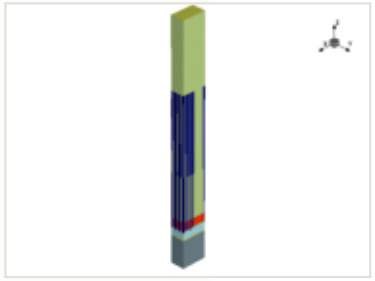

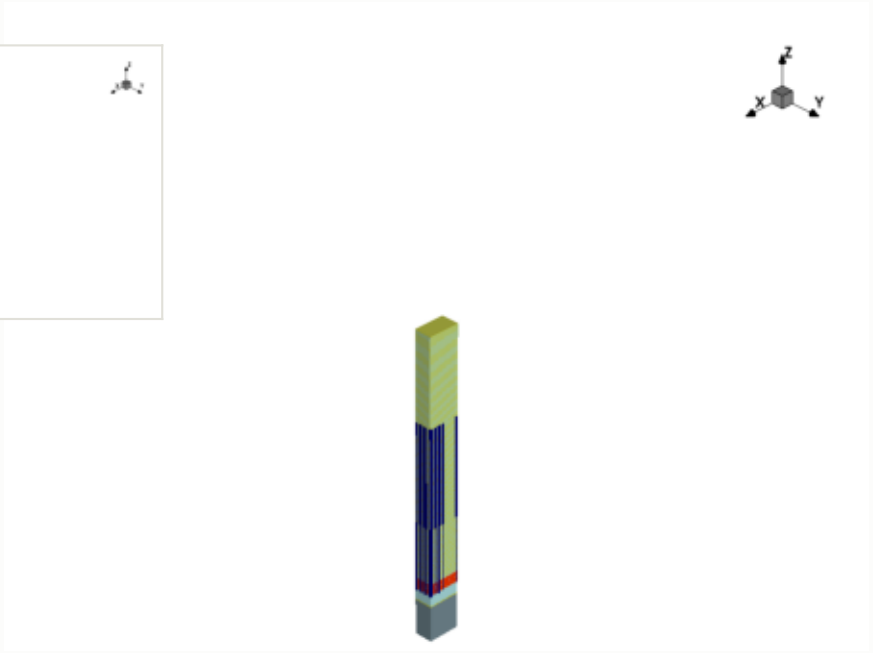

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

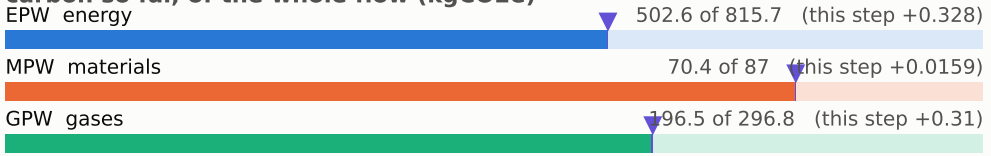

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

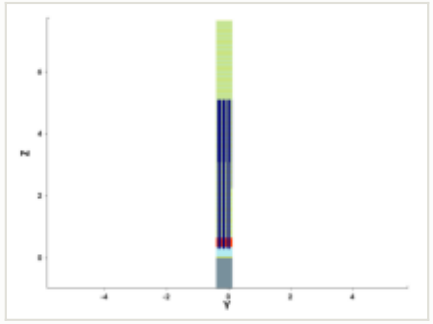

y cut at -0.150 µm

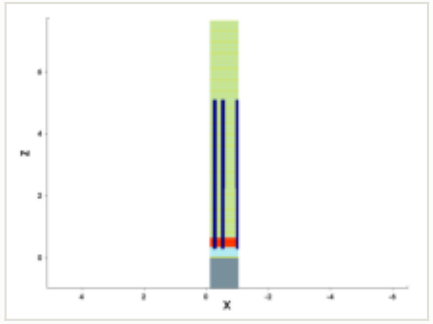

mask for this step

no mask for this step

steps by process area

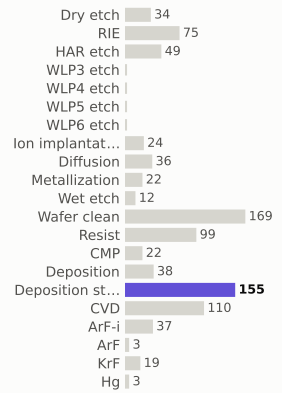

materials deposited (g)

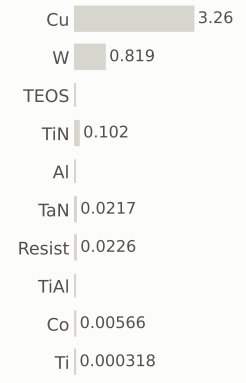

gases emitted (g)

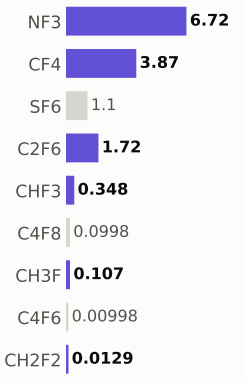

Step #17790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	770.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

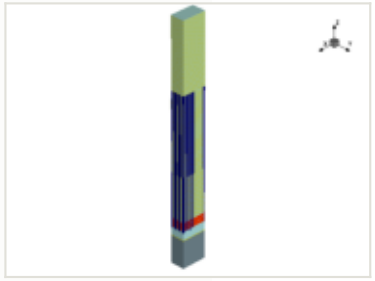

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

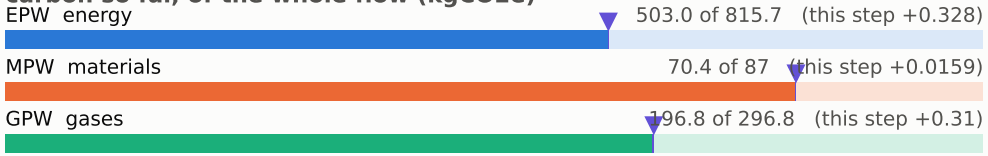

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

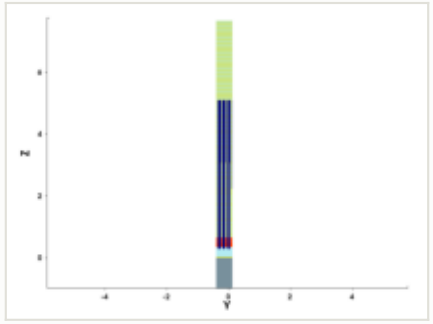

y cut at -0.150 µm

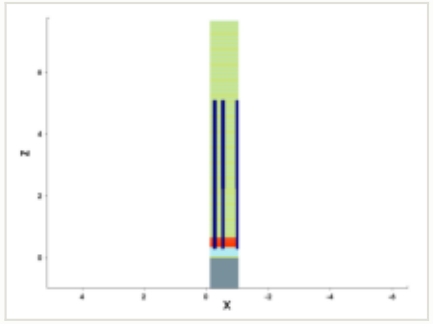

mask for this step

no mask for this step

steps by process area

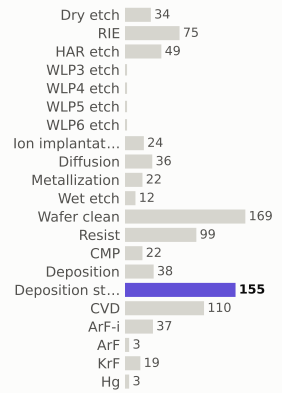

materials deposited (g)

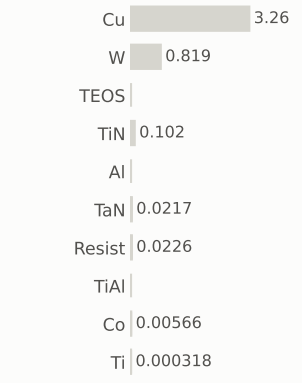

gases emitted (g)

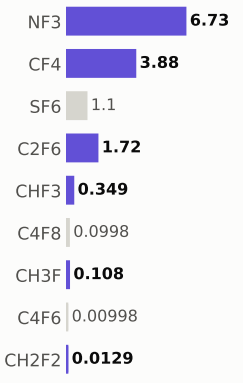

Step #17800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	770.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

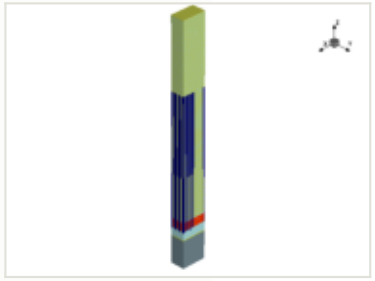

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

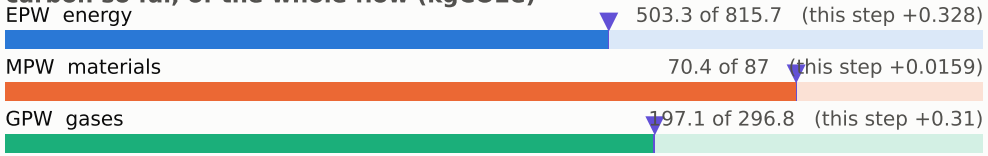

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

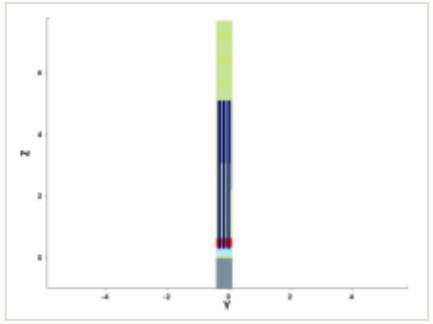

y cut at -0.150 µm

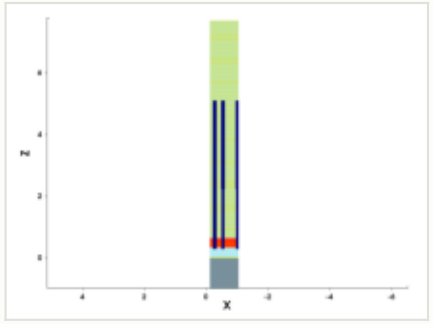

mask for this step

no mask for this step

steps by process area

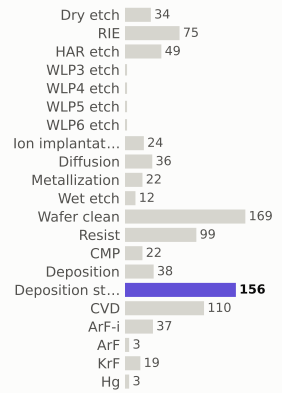

materials deposited (g)

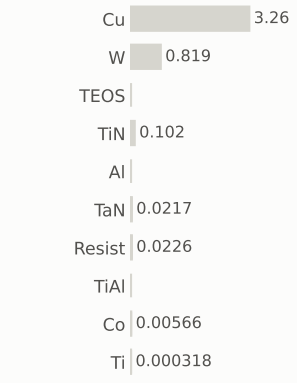

gases emitted (g)

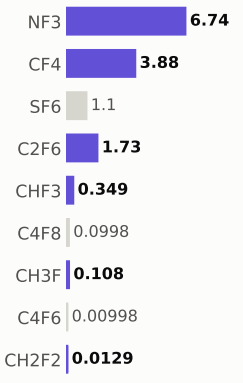

Step #17810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	771.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

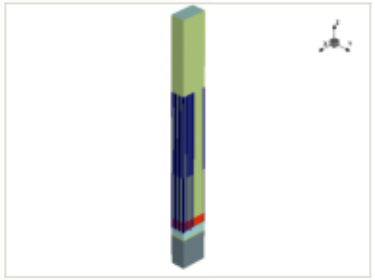

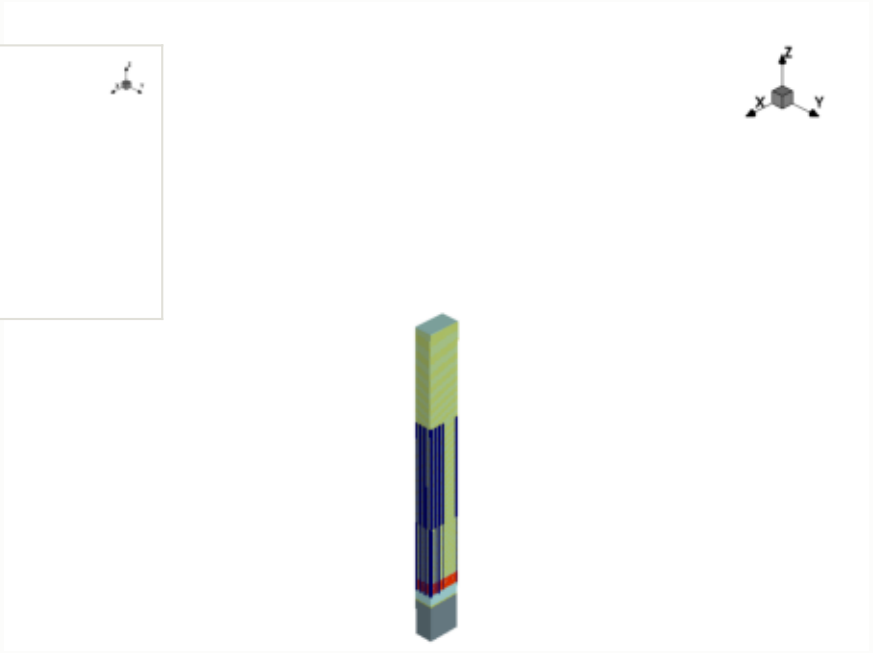

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

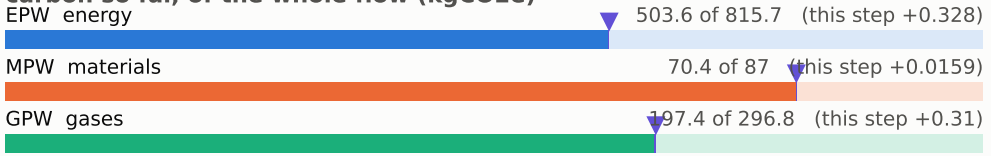

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

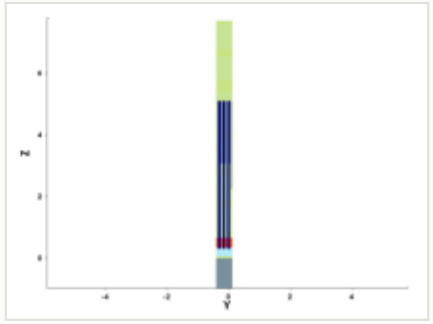

y cut at -0.150 µm

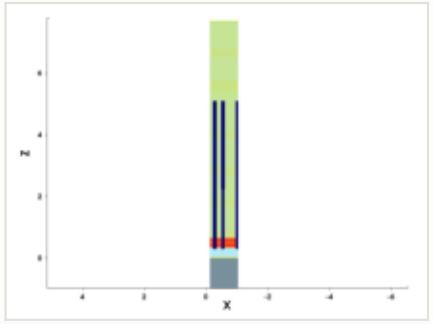

mask for this step

no mask for this step

steps by process area

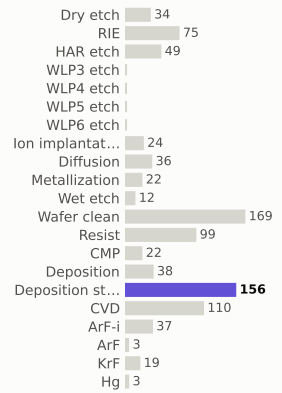

materials deposited (g)

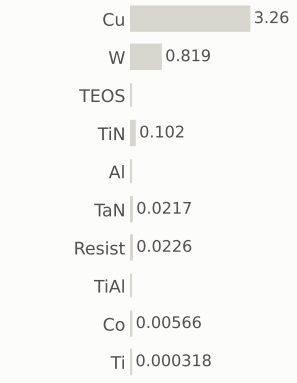

gases emitted (g)

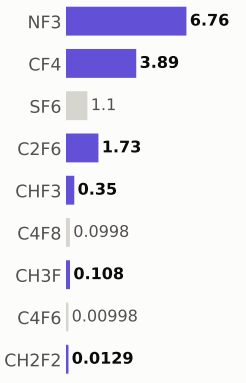

Step #17820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	772.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

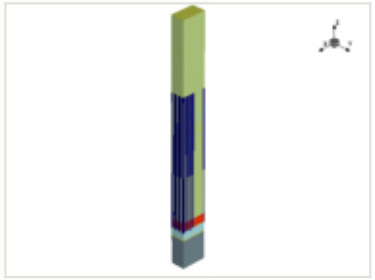

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

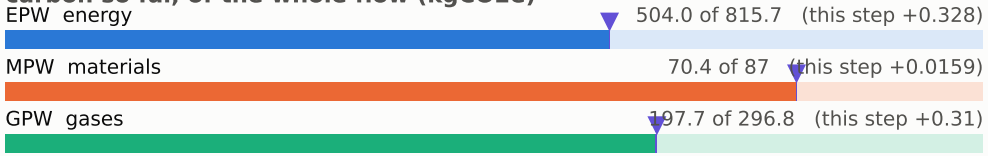

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

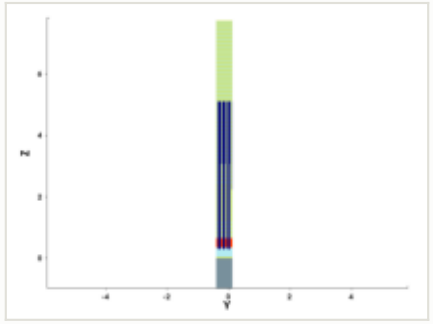

y cut at -0.150 µm

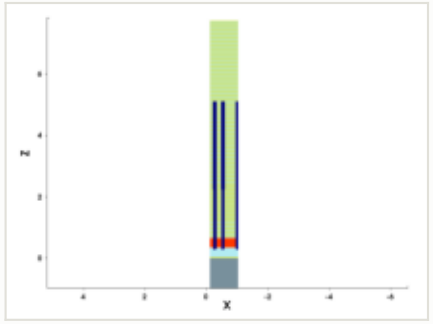

mask for this step

no mask for this step

steps by process area

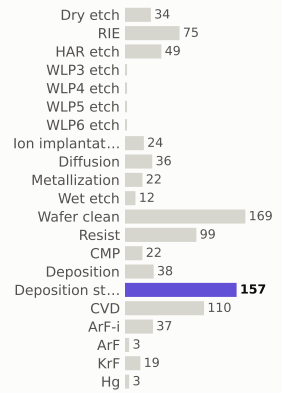

materials deposited (g)

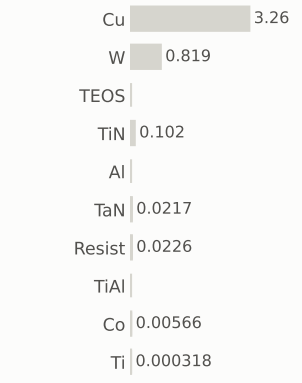

gases emitted (g)

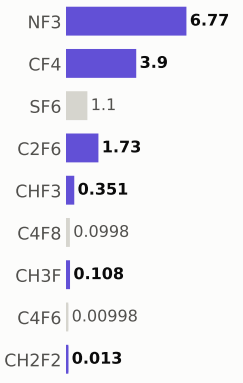

Step #17830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	772.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

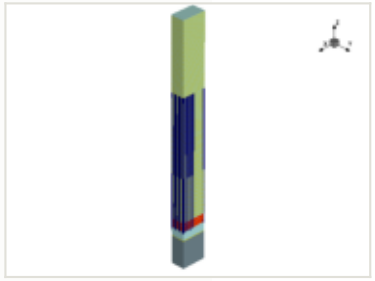

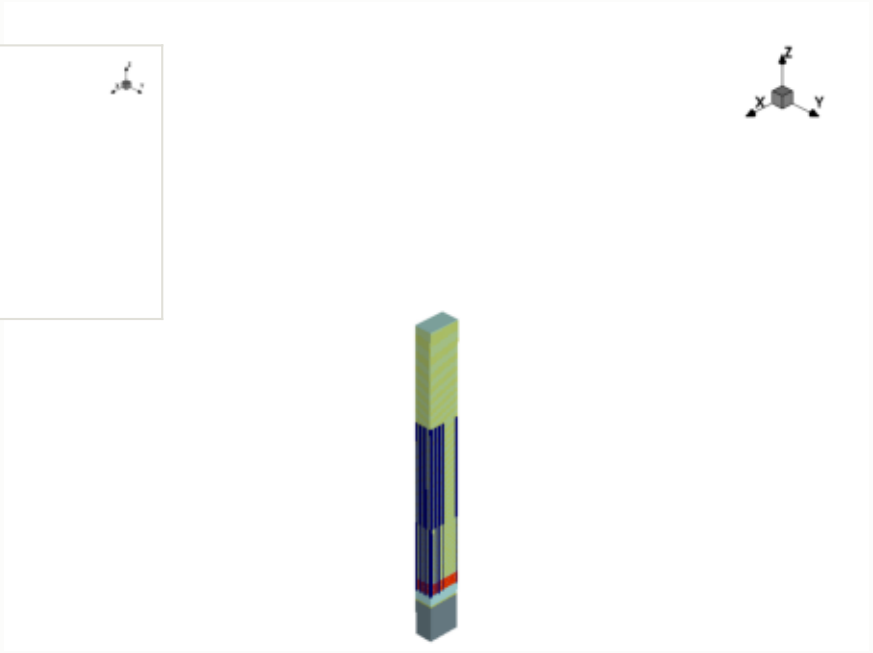

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

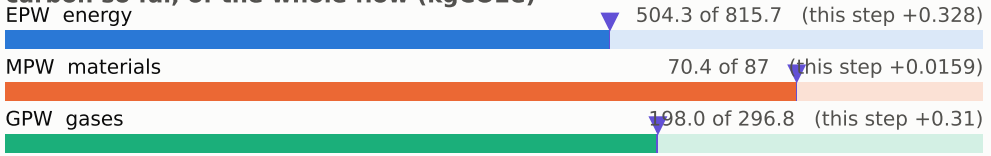

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

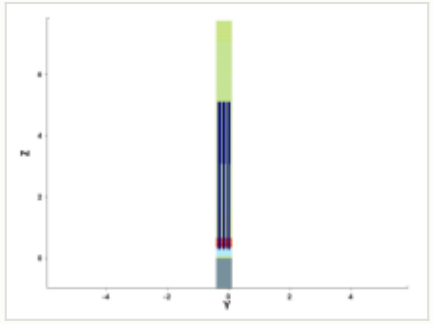

y cut at -0.150 µm

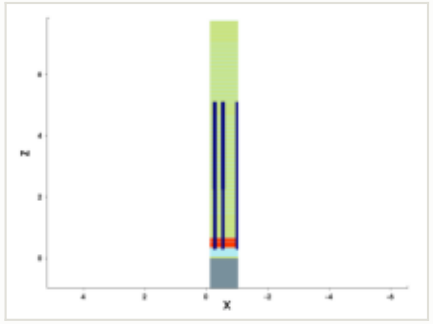

mask for this step

no mask for this step

steps by process area

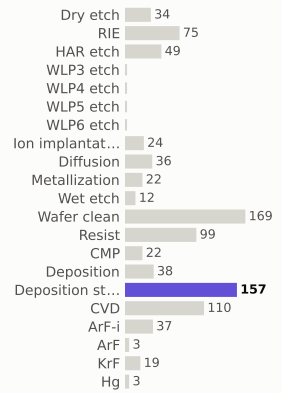

materials deposited (g)

gases emitted (g)

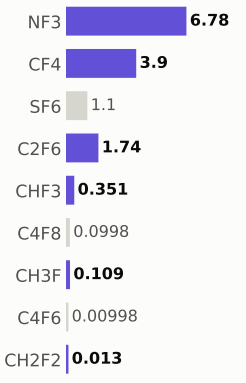

Step #17840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	773.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

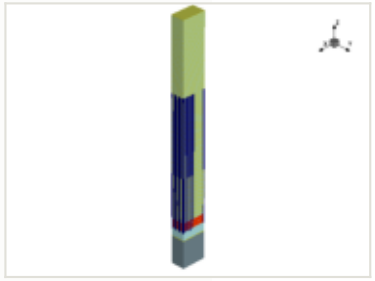

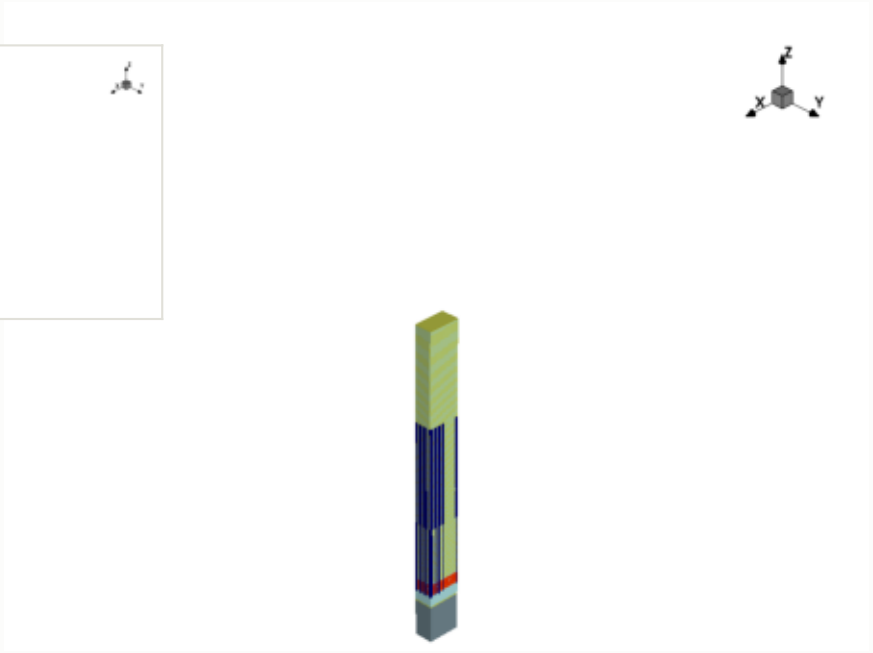

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

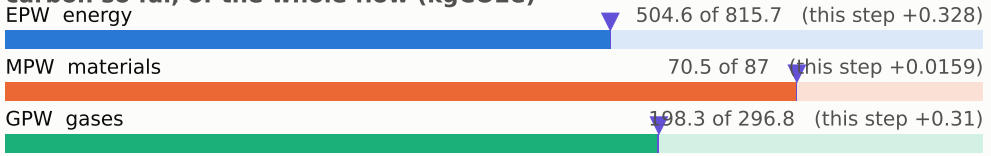

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

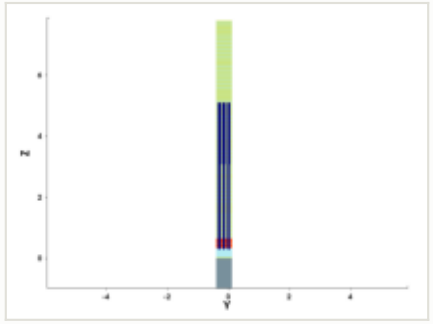

y cut at -0.150 µm

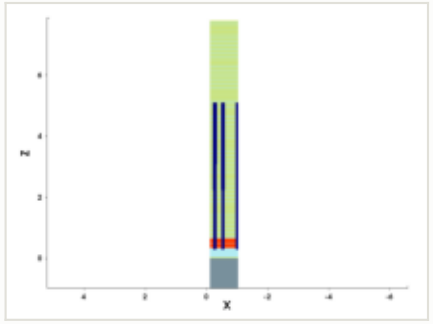

mask for this step

no mask for this step

steps by process area

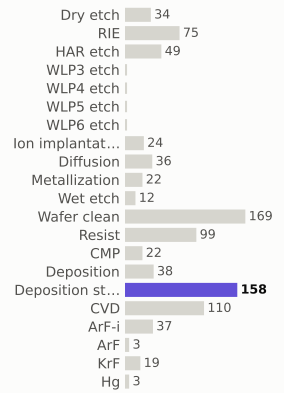

materials deposited (g)

gases emitted (g)

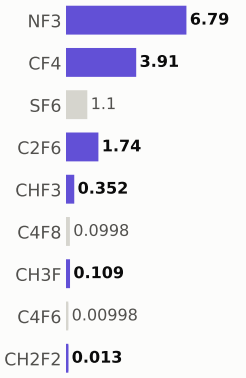

Step #17850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	774.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

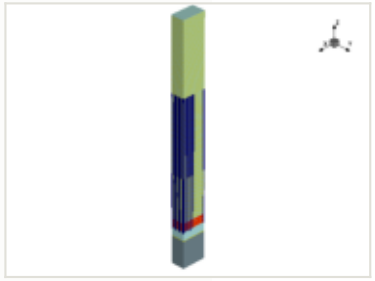

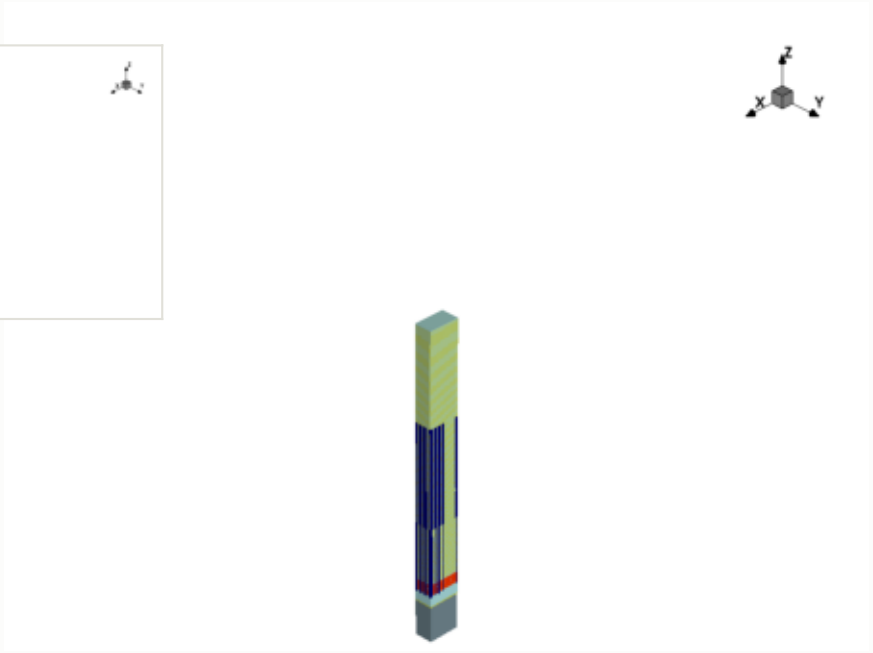

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

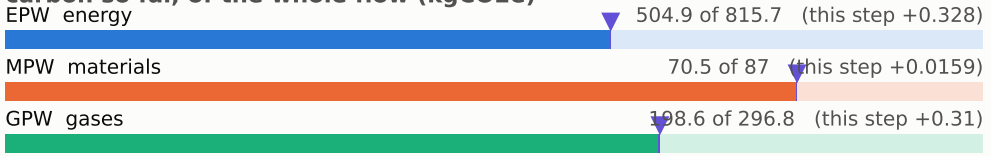

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

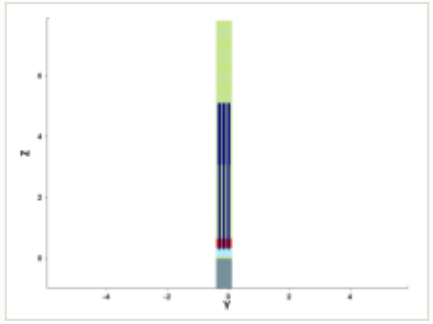

y cut at -0.150 µm

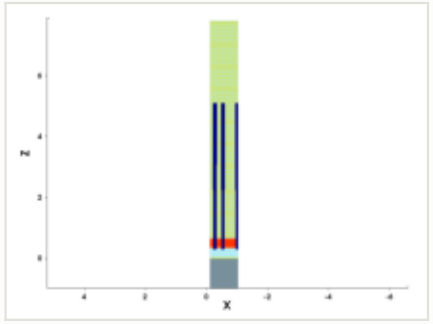

mask for this step

no mask for this step

steps by process area

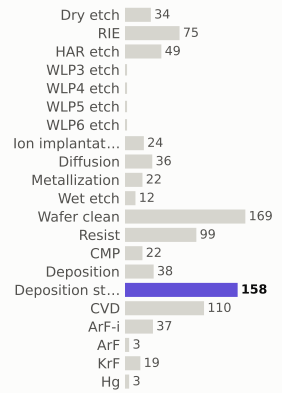

materials deposited (g)

gases emitted (g)

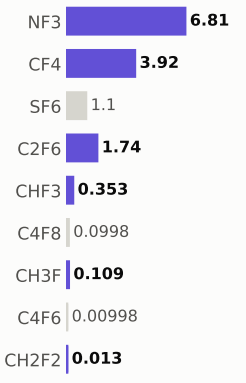

Step #17860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	774.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

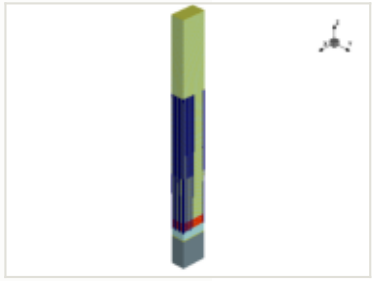

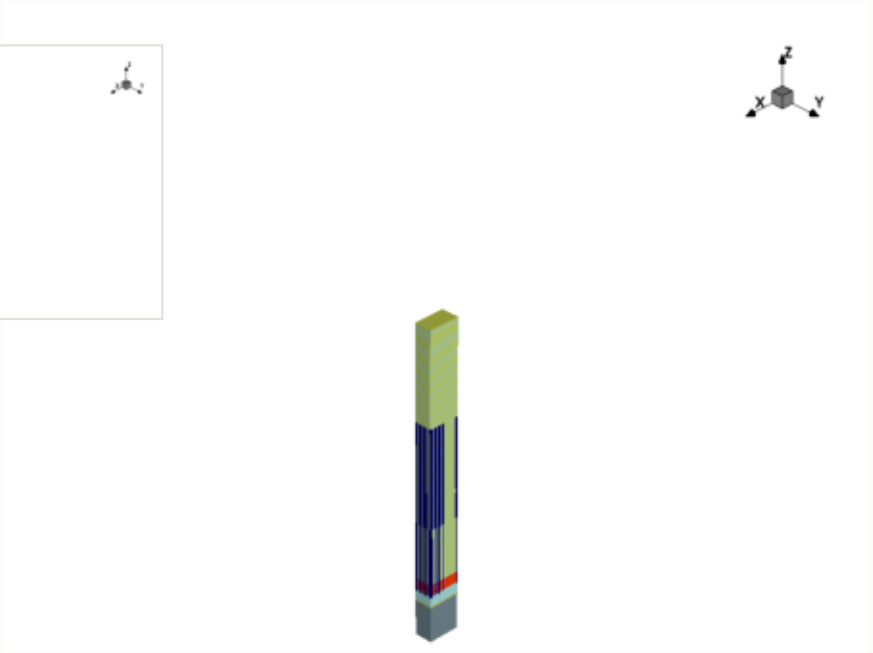

x cut at -0.570 µm

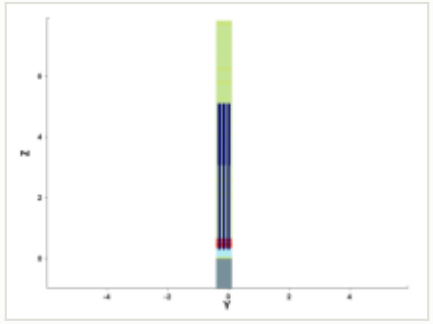

y cut at -0.150 µm

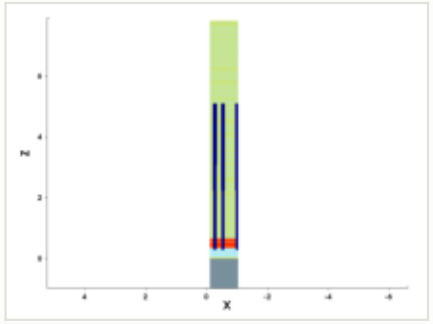

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

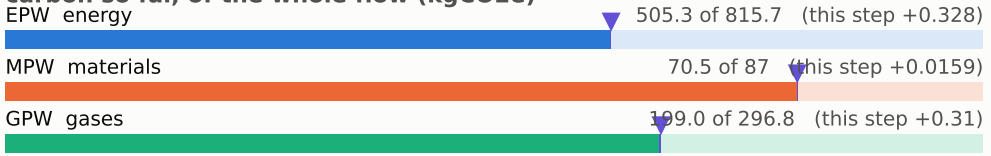

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

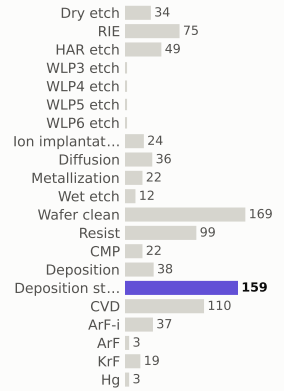

materials deposited (g)

gases emitted (g)

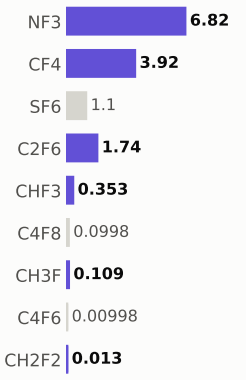

Step #17870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	775.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

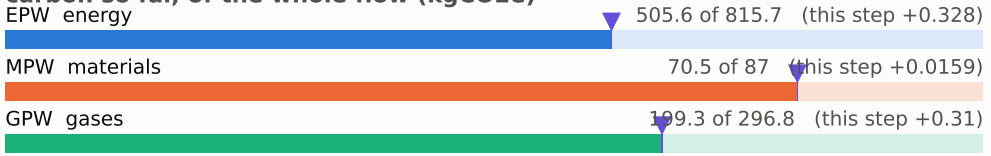

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

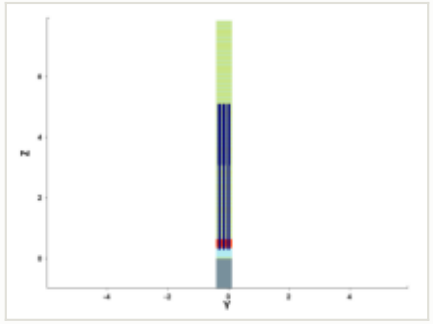

y cut at -0.150 µm

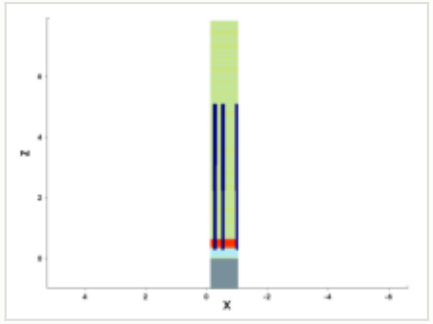

mask for this step

no mask for this step

steps by process area

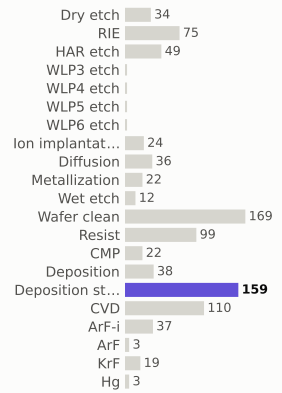

materials deposited (g)

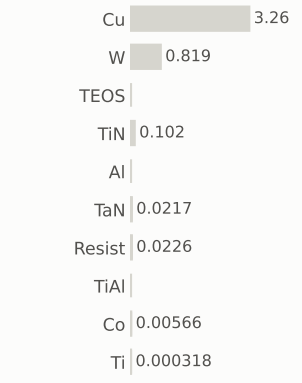

gases emitted (g)

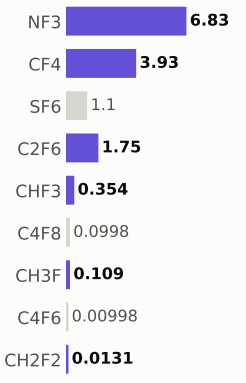

Step #17880: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	776.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

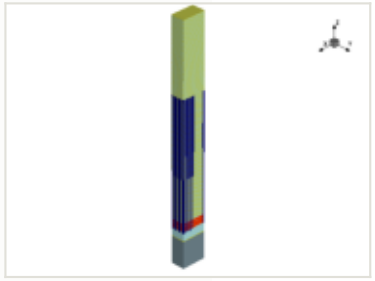

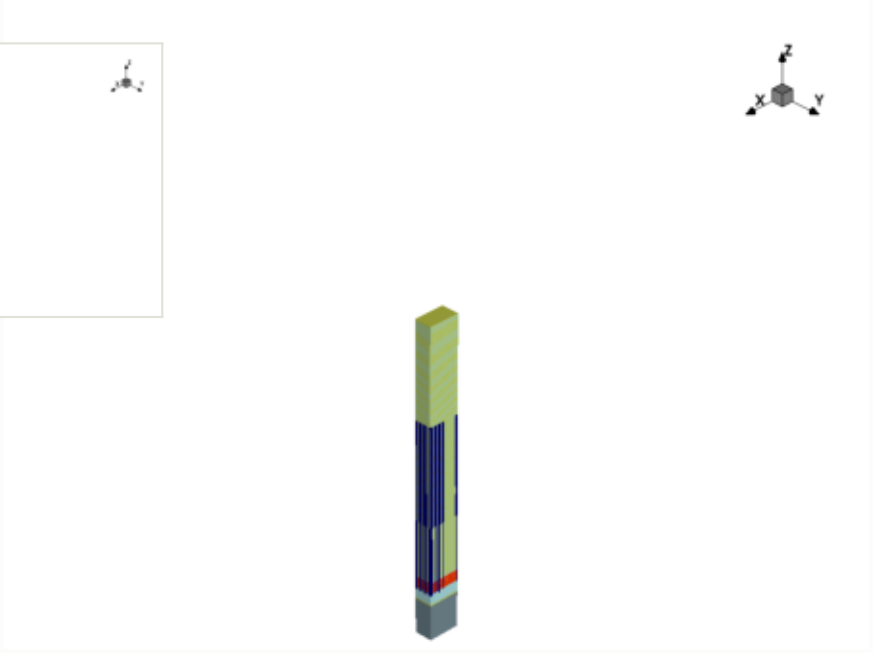

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

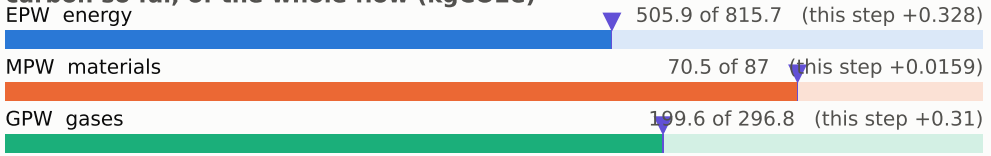

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

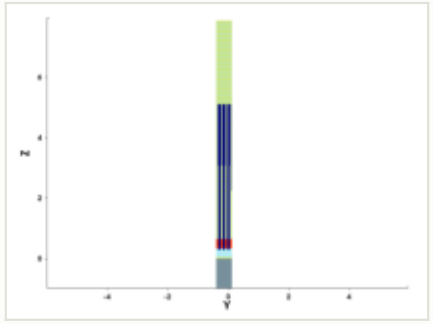

y cut at -0.150 µm

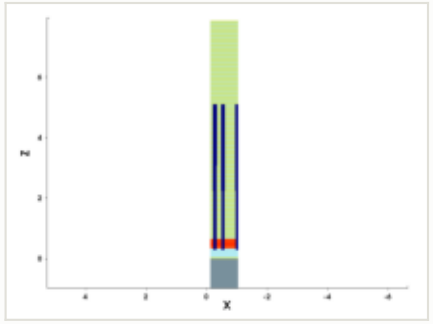

mask for this step

no mask for this step

steps by process area

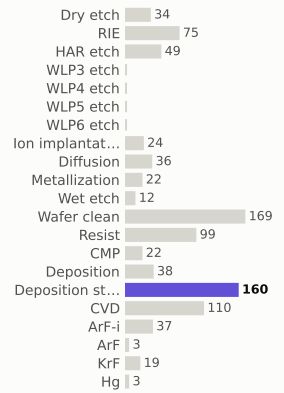

materials deposited (g)

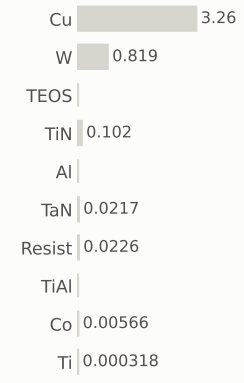

gases emitted (g)

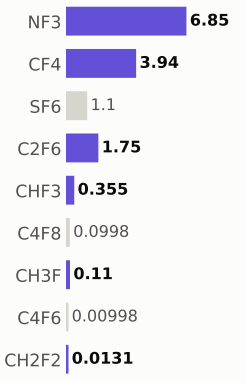

Step #17890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	776.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

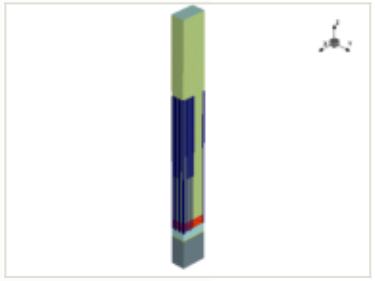

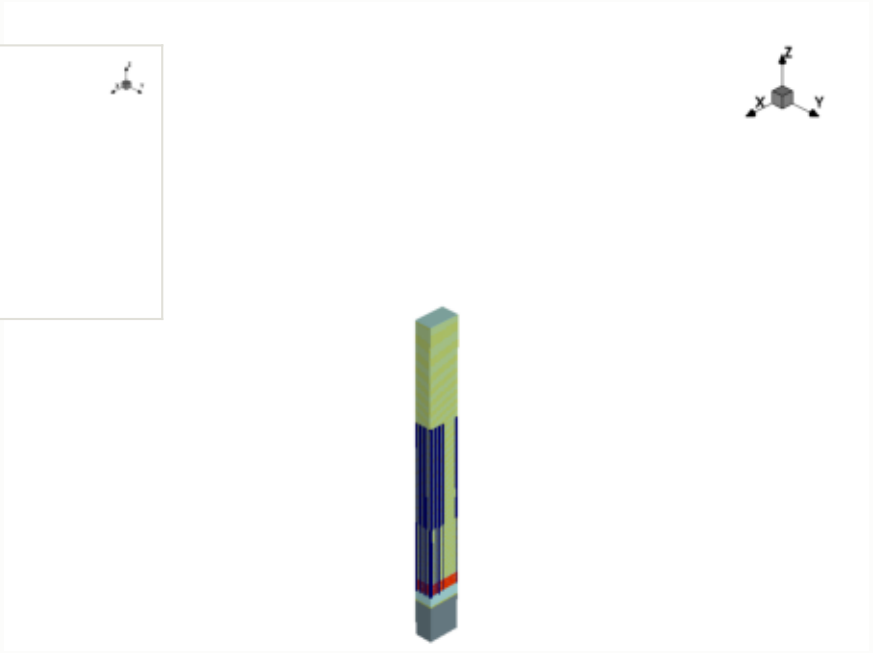

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

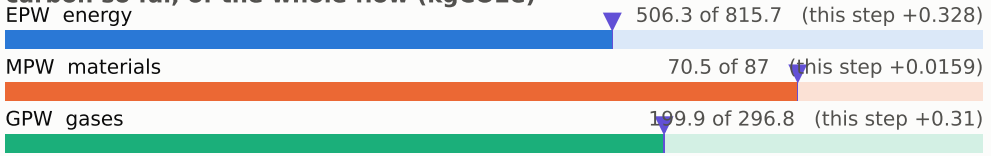

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

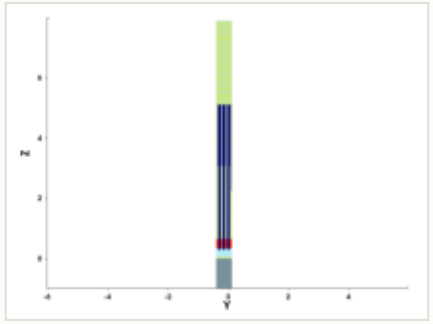

y cut at -0.150 µm

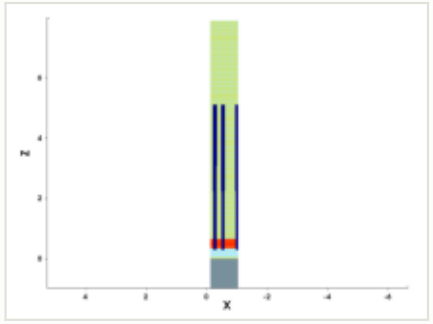

mask for this step

no mask for this step

steps by process area

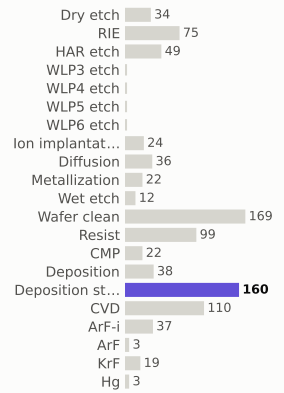

materials deposited (g)

gases emitted (g)

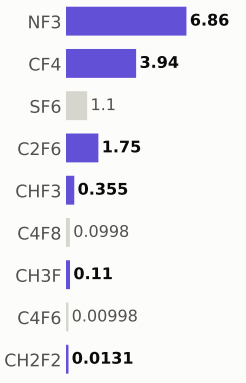

Step #17900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	777.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

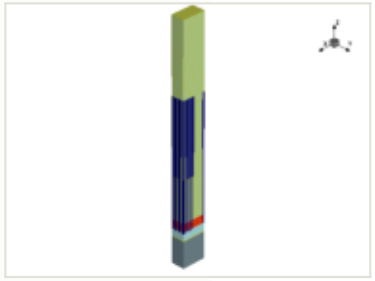

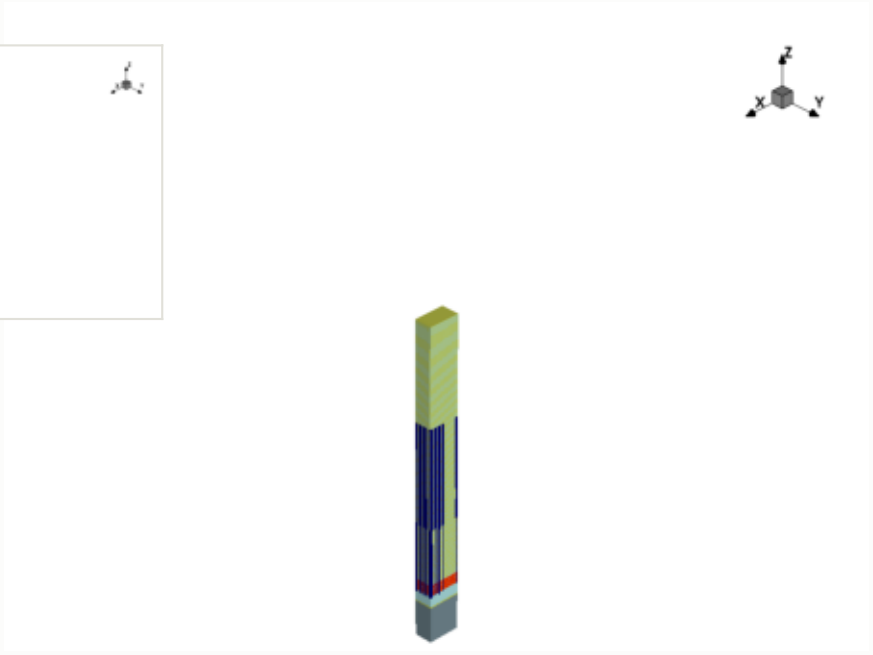

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

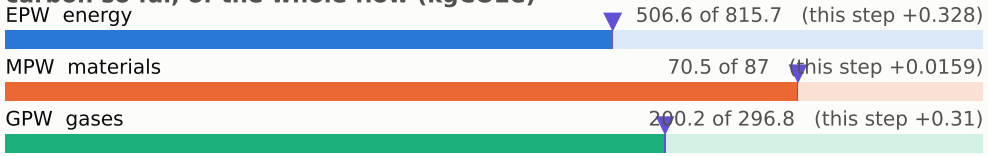

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

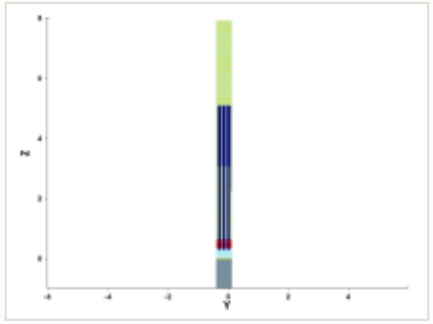

y cut at -0.150 µm

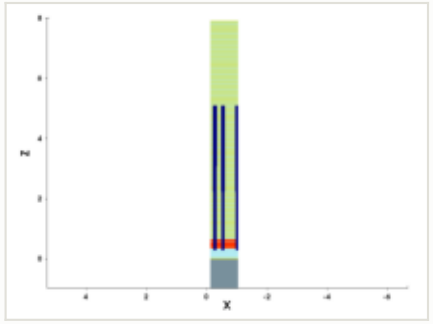

mask for this step

no mask for this step

steps by process area

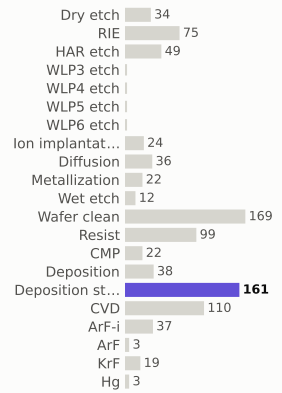

materials deposited (g)

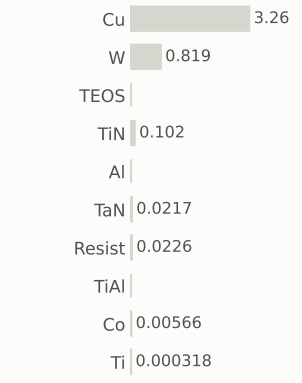

gases emitted (g)

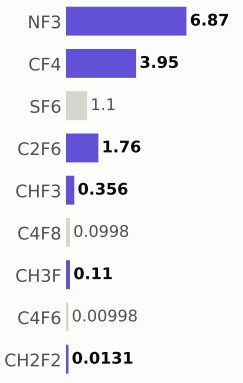

Step #17910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	778.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

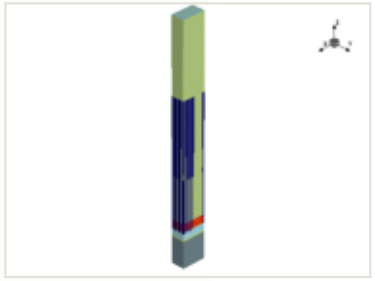

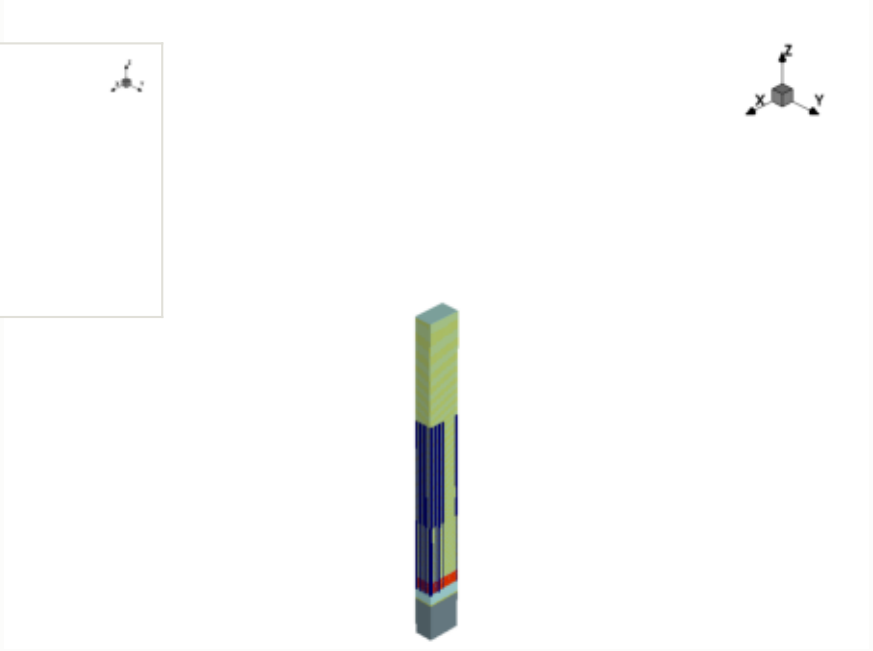

x cut at -0.570 µm

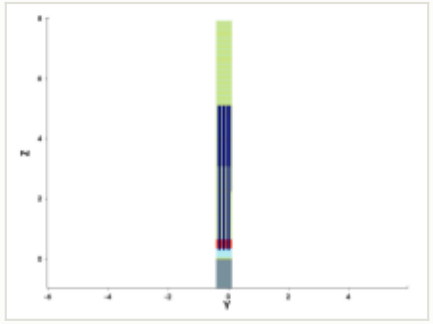

y cut at -0.150 µm

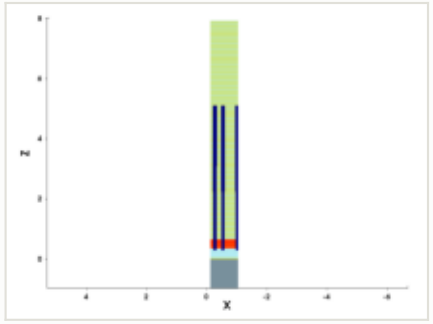

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

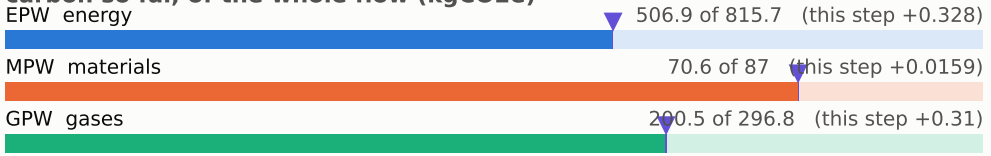

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

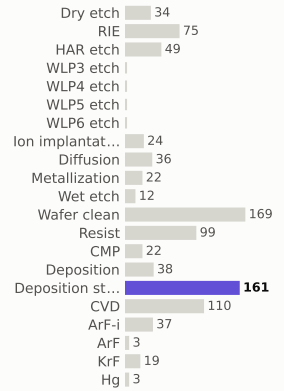

materials deposited (g)

gases emitted (g)

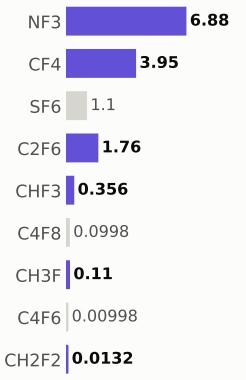

Step #17920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	778.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

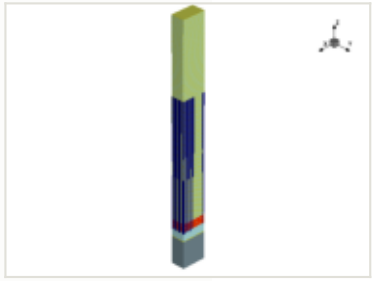

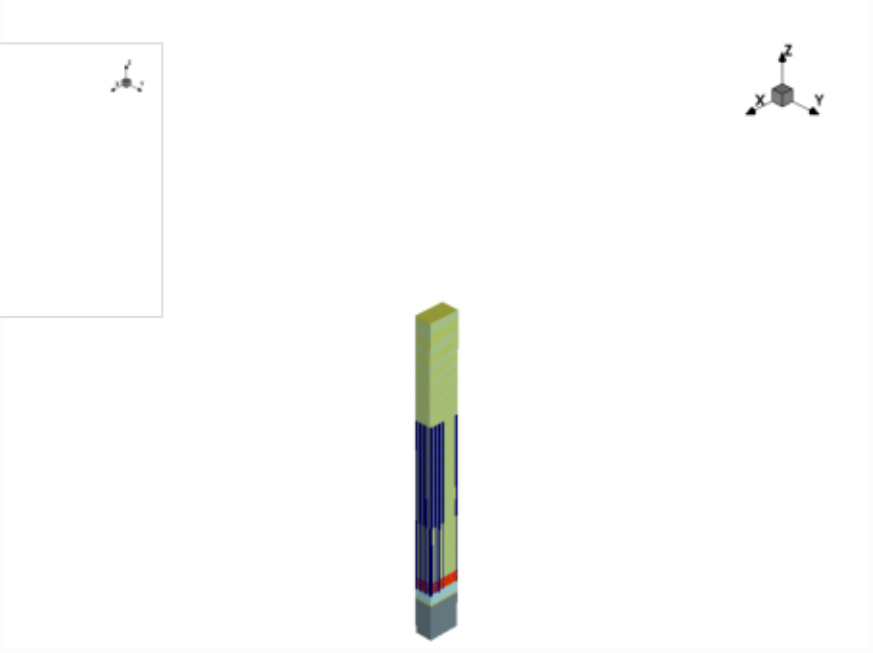

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

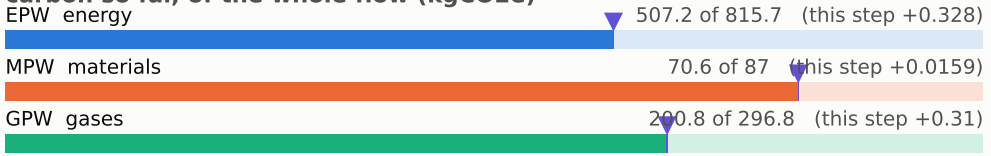

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

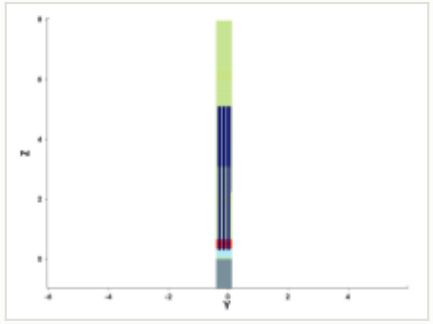

y cut at -0.150 µm

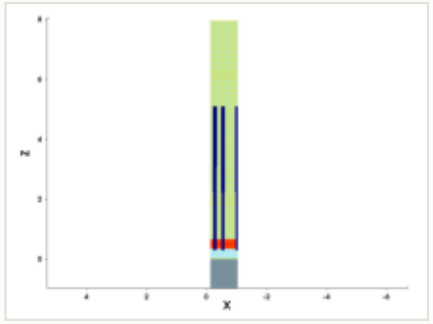

mask for this step

no mask for this step

steps by process area

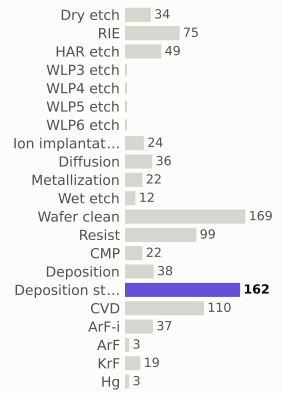

materials deposited (g)

gases emitted (g)

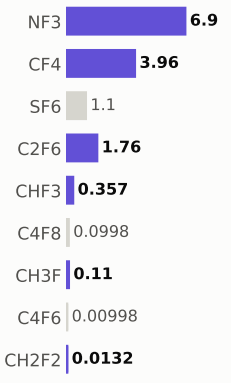

Step #17930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	779.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

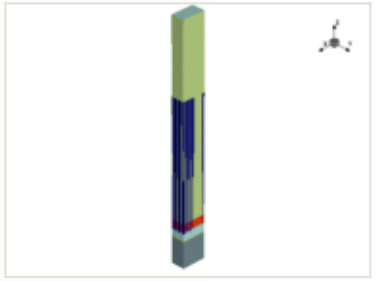

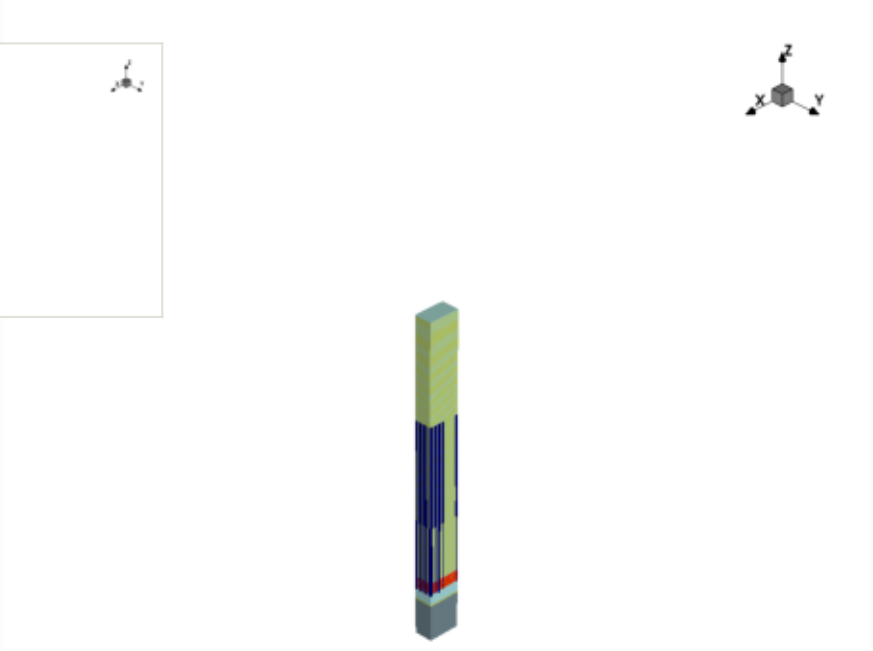

x cut at -0.570 µm

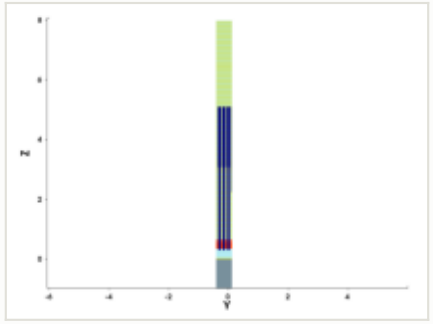

y cut at -0.150 µm

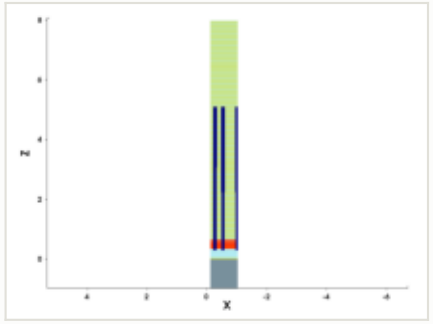

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

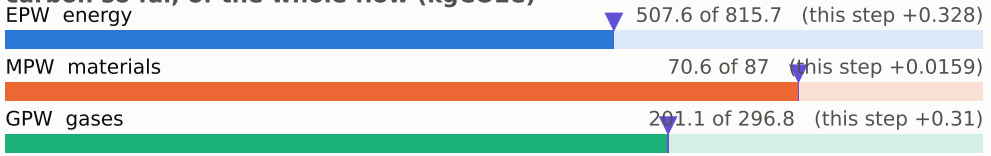

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

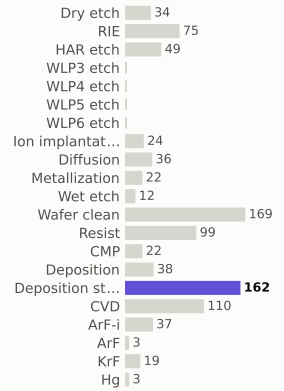

materials deposited (g)

gases emitted (g)

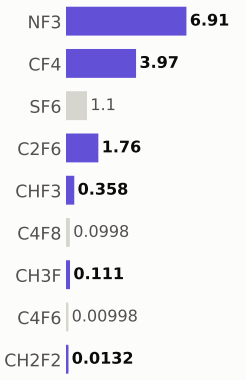

Step #17940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	779.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

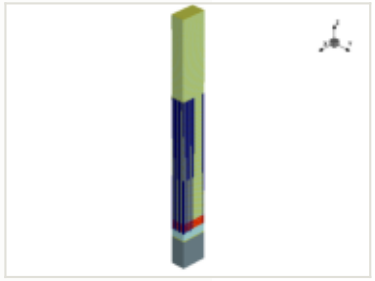

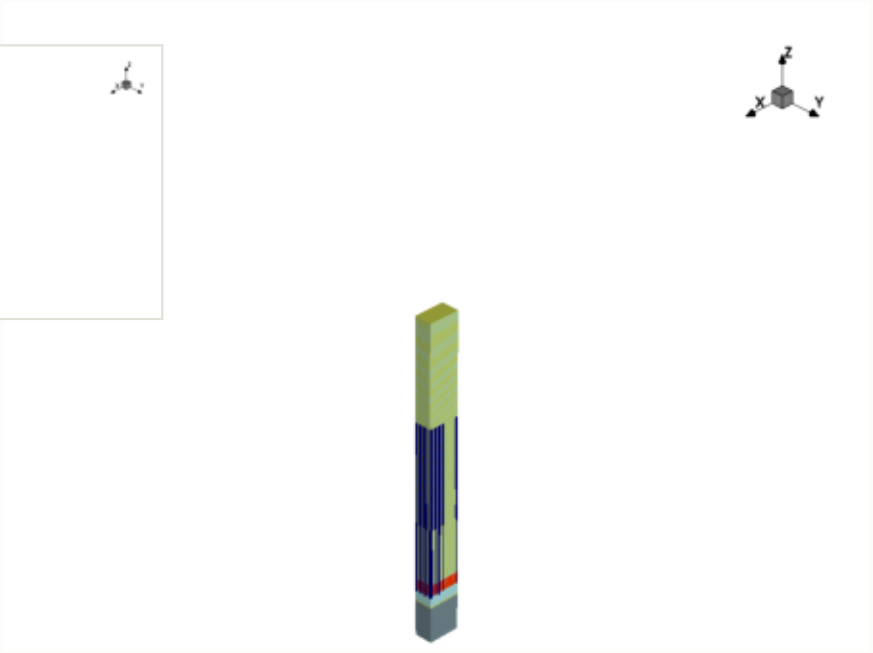

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

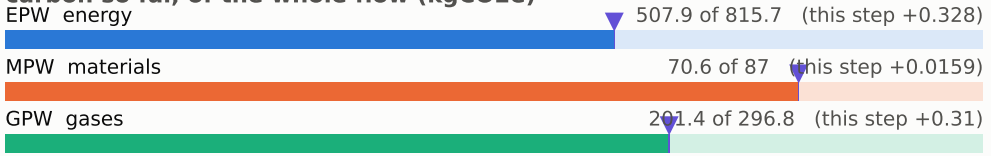

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

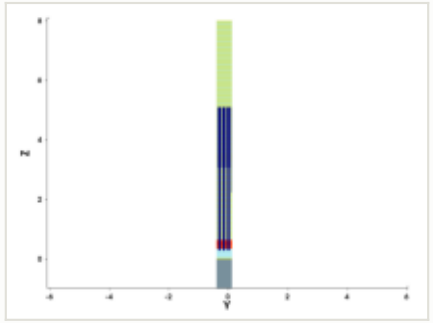

y cut at -0.150 µm

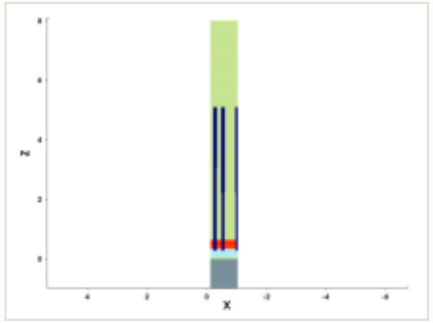

mask for this step

no mask for this step

steps by process area

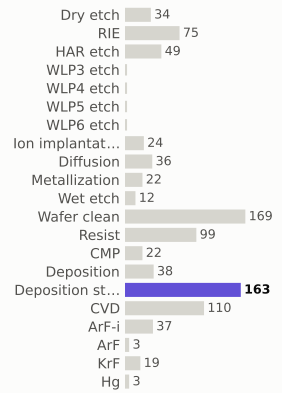

materials deposited (g)

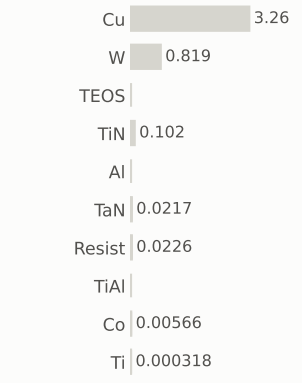

gases emitted (g)



Step #17950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	780.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

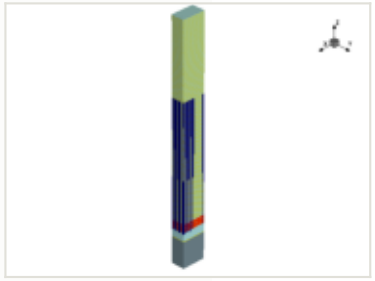

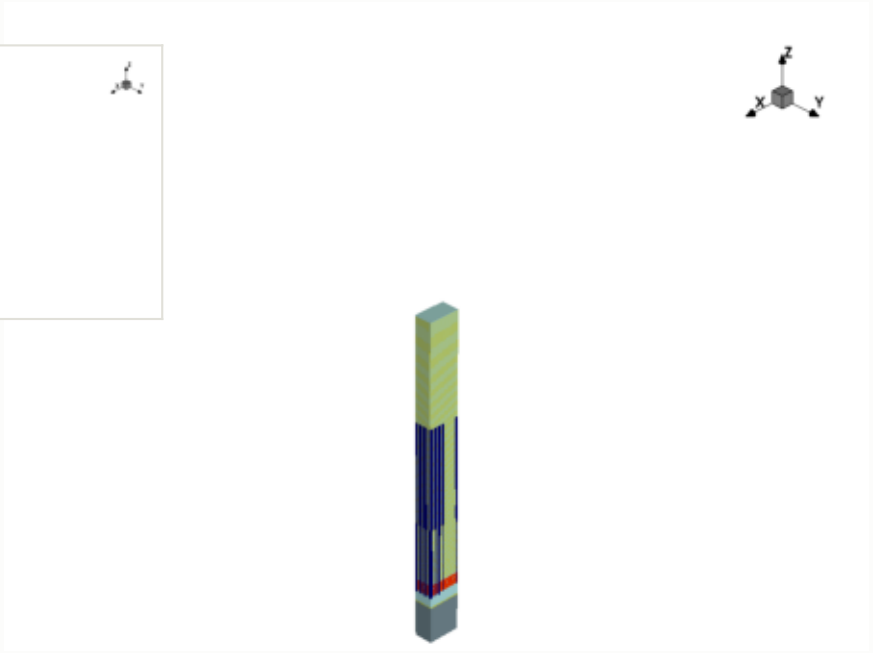

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

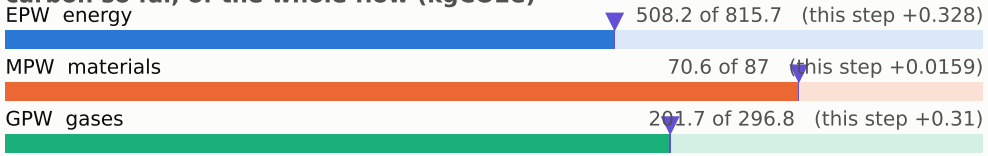

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

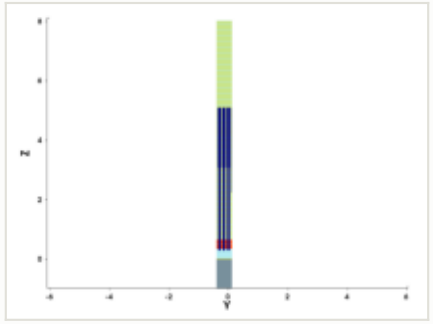

y cut at -0.150 µm

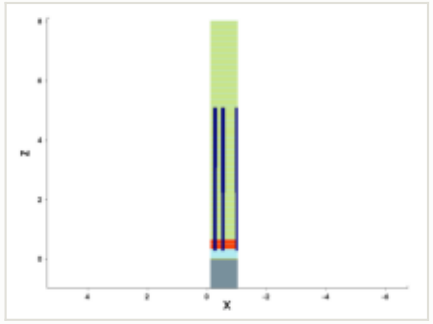

mask for this step

no mask for this step

steps by process area

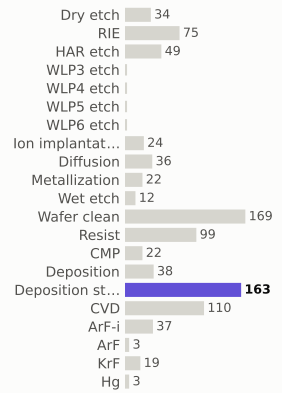

materials deposited (g)

gases emitted (g)

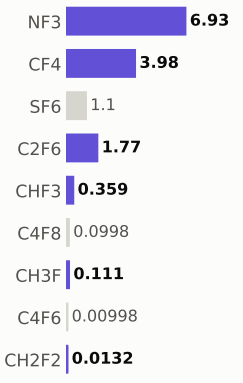

Step #17960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	781.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

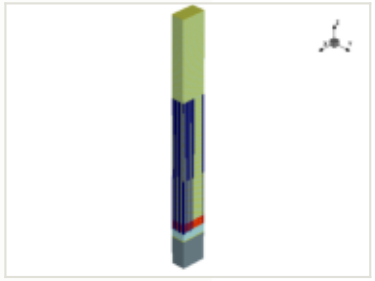

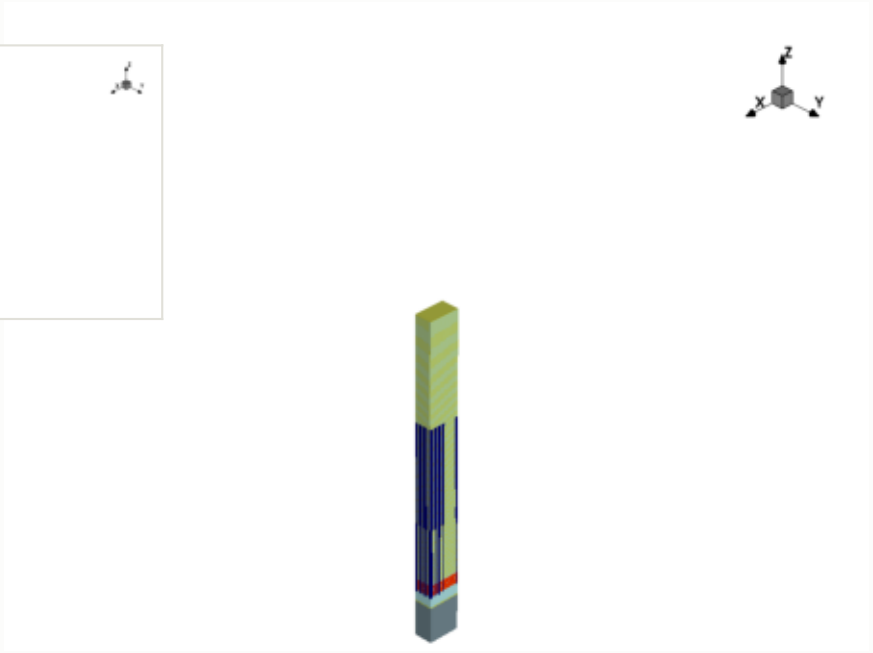

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

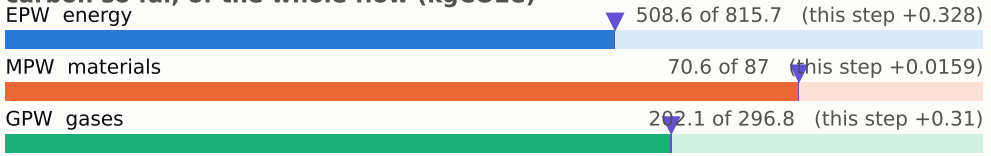

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

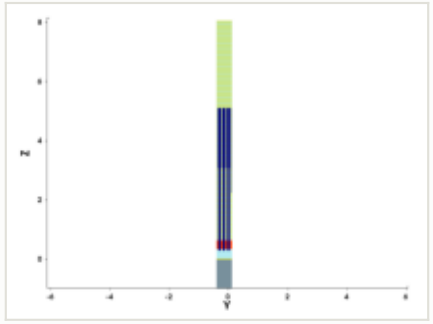

y cut at -0.150 µm

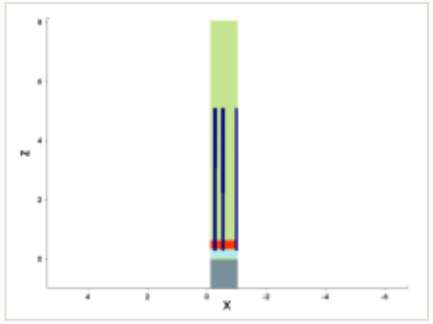

mask for this step

no mask for this step

steps by process area

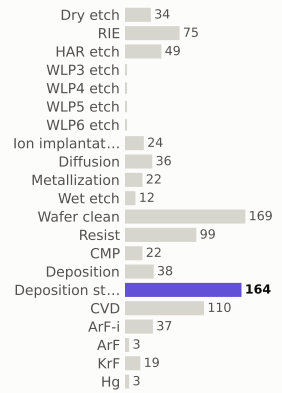

materials deposited (g)

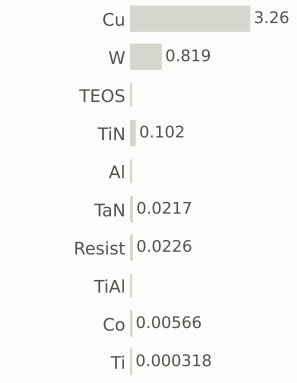

gases emitted (g)

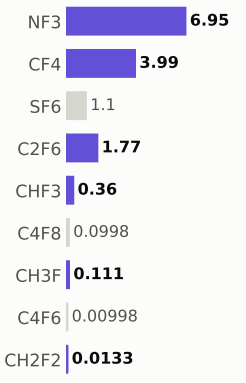

Step #17970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	781.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

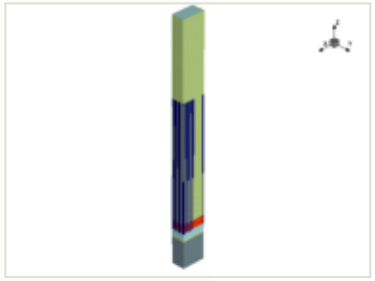

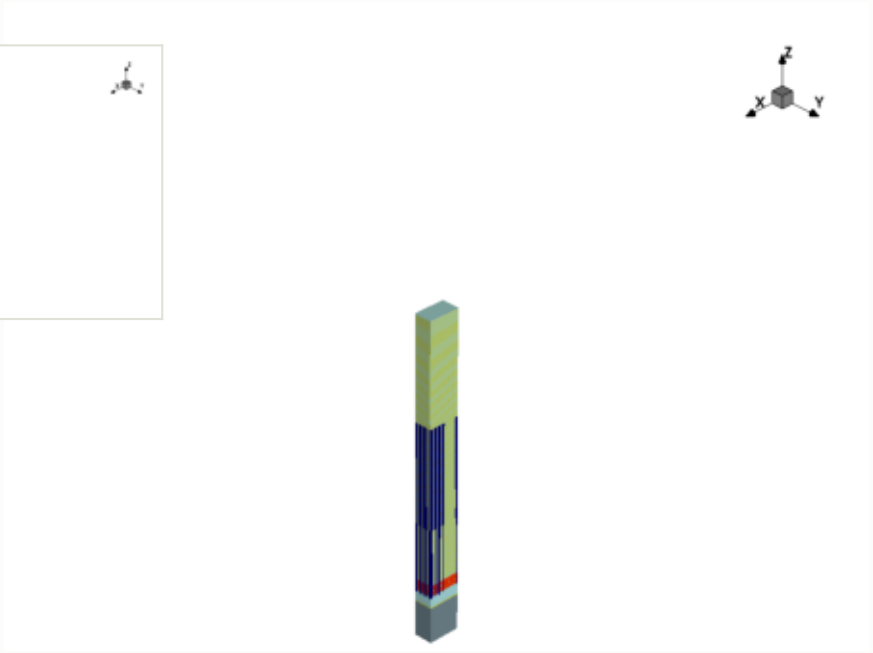

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

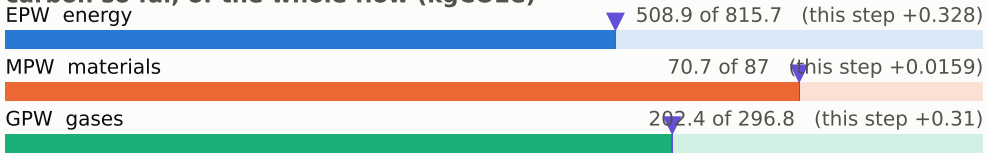

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

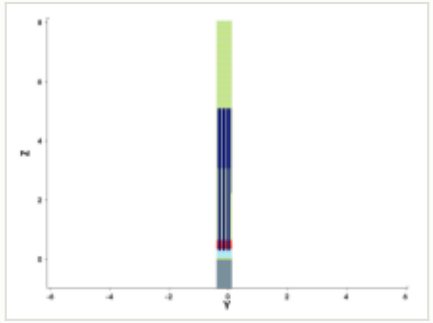

y cut at -0.150 µm

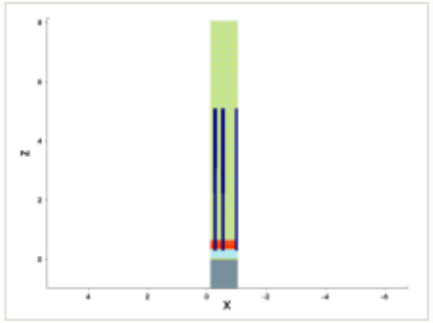

mask for this step

no mask for this step

steps by process area

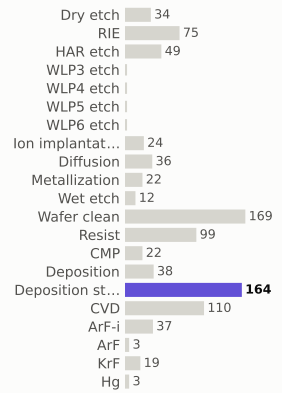

materials deposited (g)

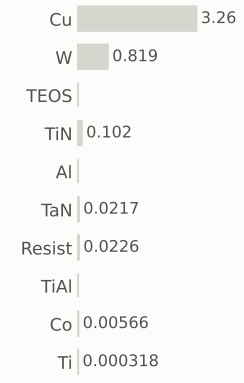

gases emitted (g)

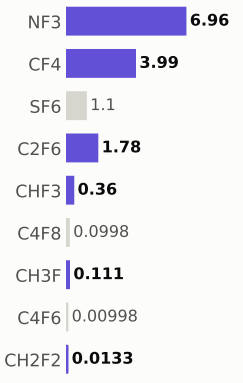

Step #17980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	782.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

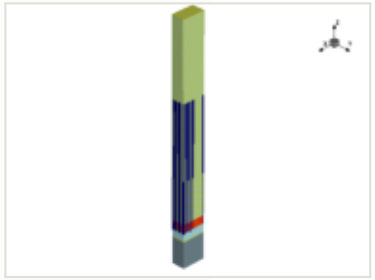

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

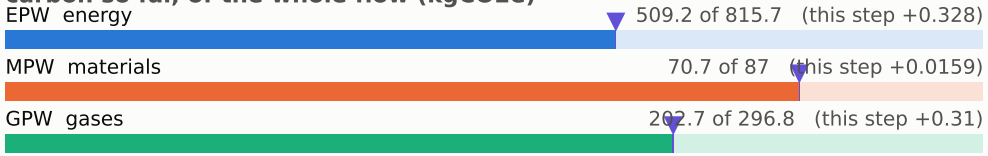

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

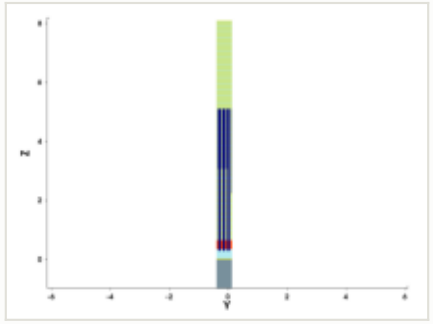

y cut at -0.150 µm

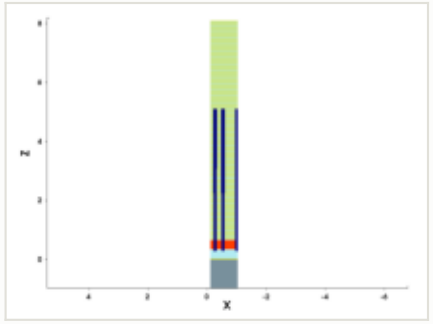

mask for this step

no mask for this step

steps by process area

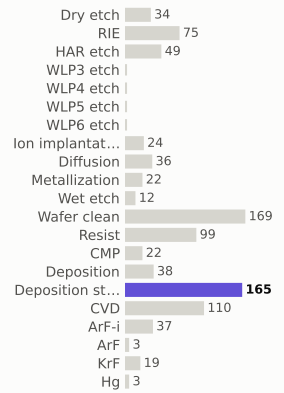

materials deposited (g)

gases emitted (g)

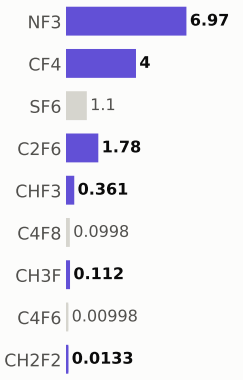

Step #17990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	783.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

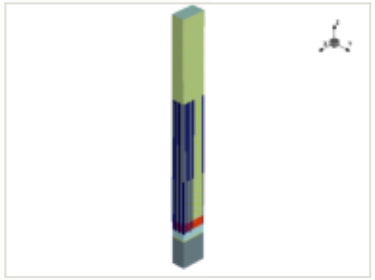

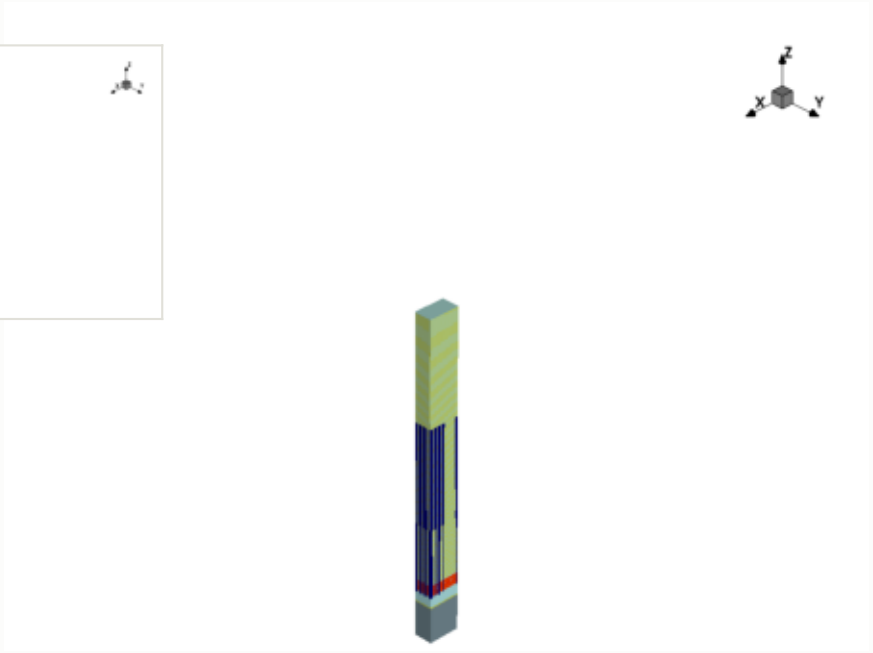

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

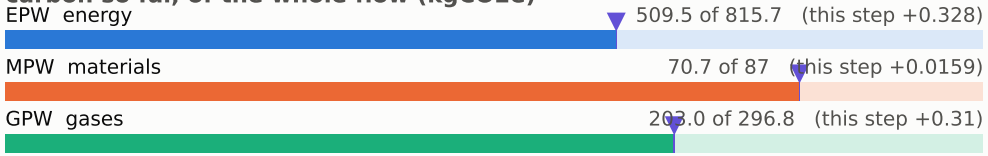

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

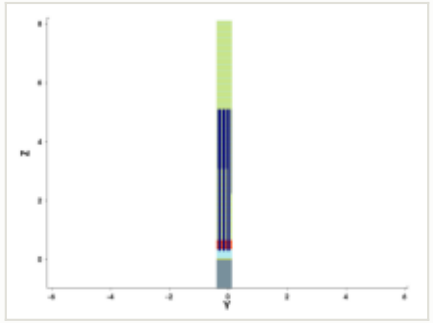

y cut at -0.150 µm

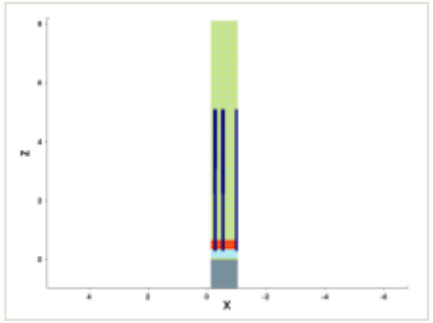

mask for this step

no mask for this step

steps by process area

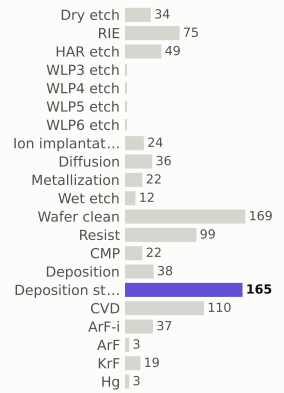

materials deposited (g)

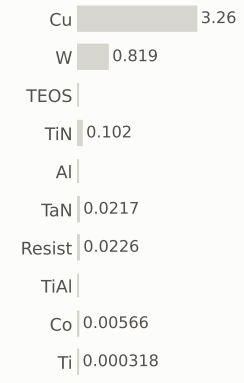

gases emitted (g)

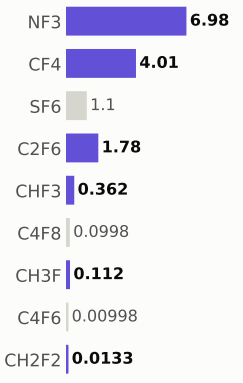

Step #18000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	783.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

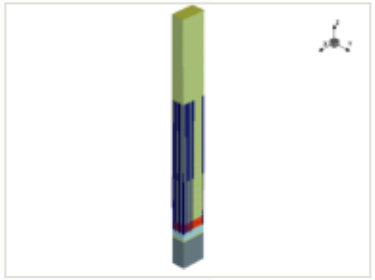

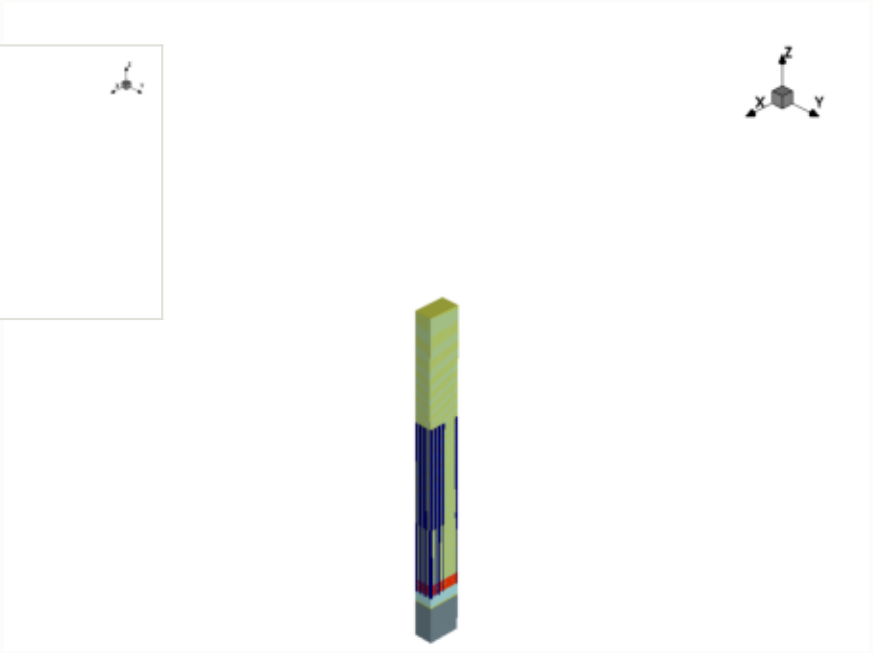

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

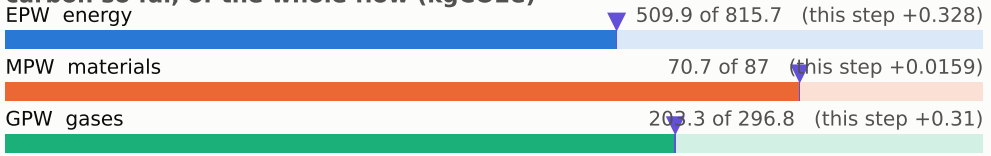

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

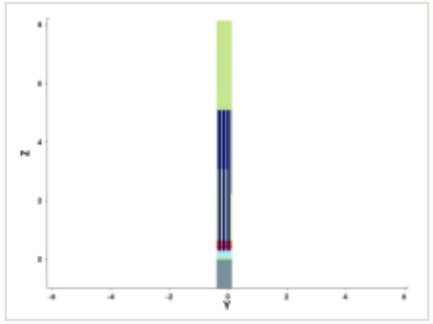

y cut at -0.150 µm

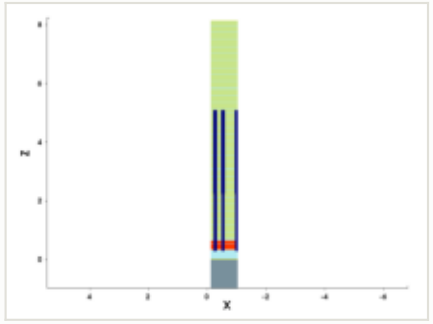

mask for this step

no mask for this step

steps by process area

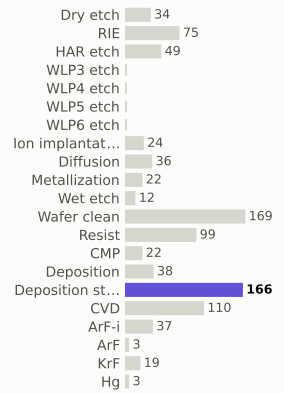

materials deposited (g)

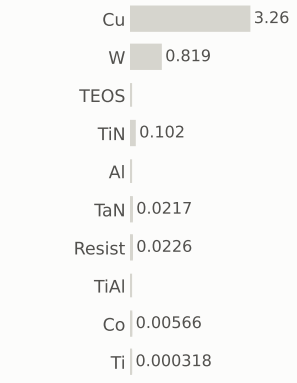

gases emitted (g)

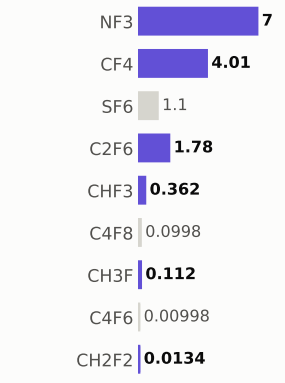

Step #18010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	784.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

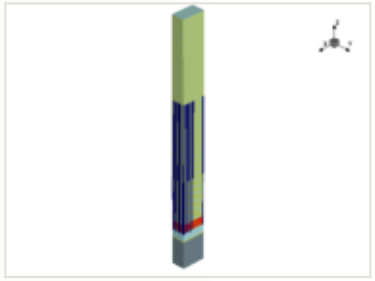

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

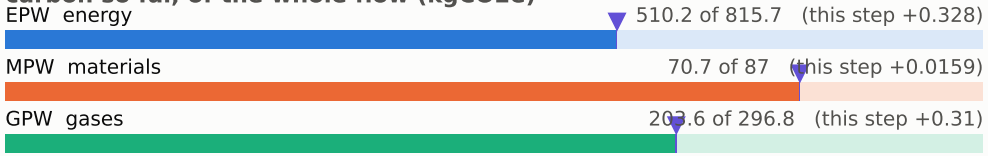

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

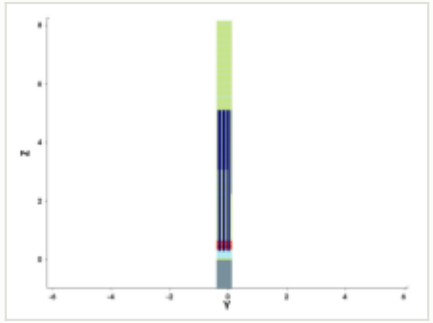

y cut at -0.150 µm

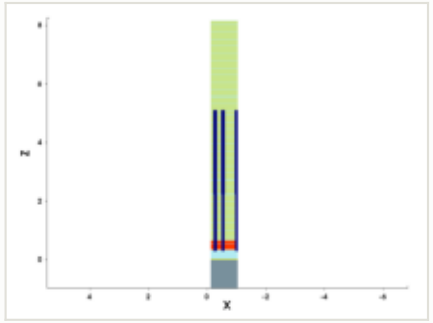

mask for this step

no mask for this step

steps by process area

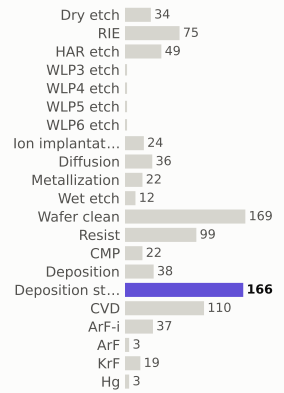

materials deposited (g)

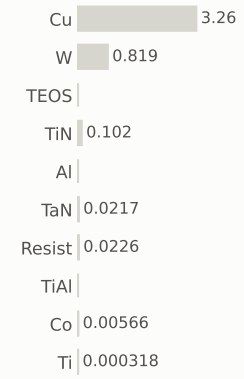

gases emitted (g)

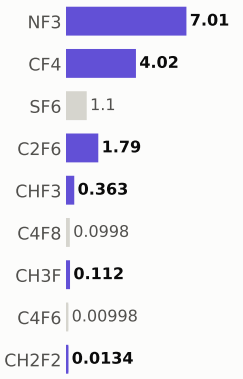

Step #18020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	785.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

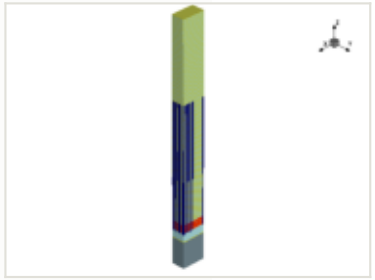

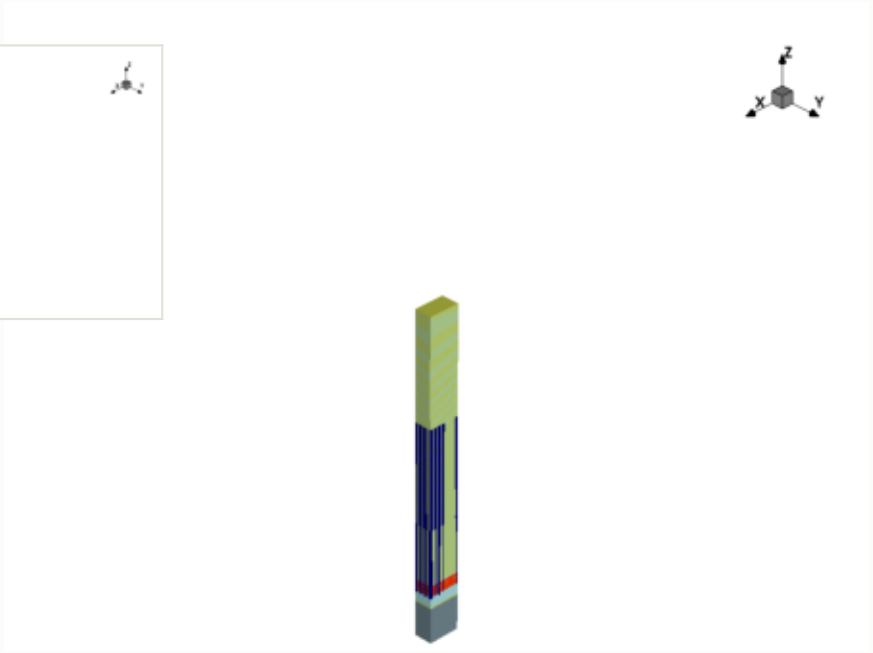

this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

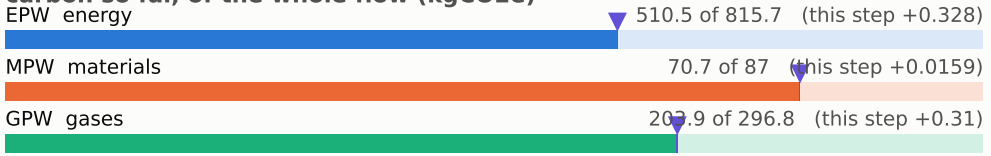

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

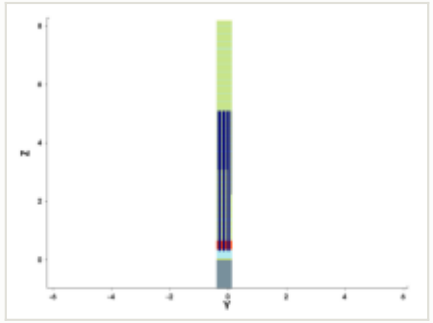

y cut at -0.150 µm

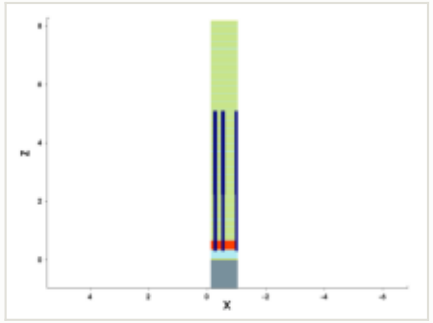

mask for this step

no mask for this step

steps by process area

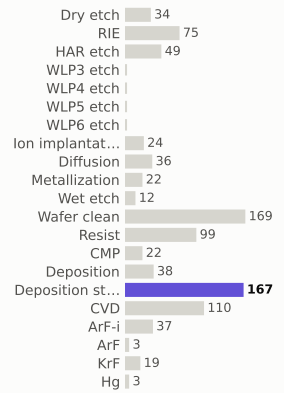

materials deposited (g)

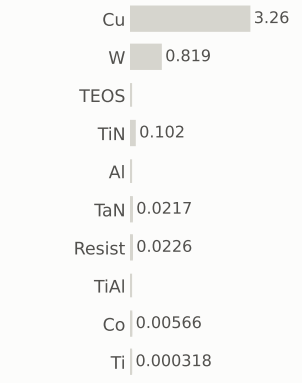

gases emitted (g)



Step #18030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	785.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

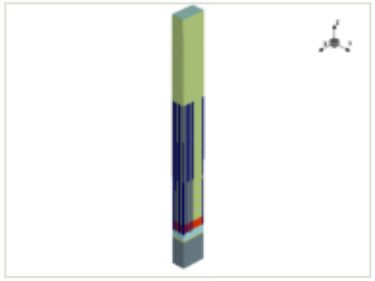

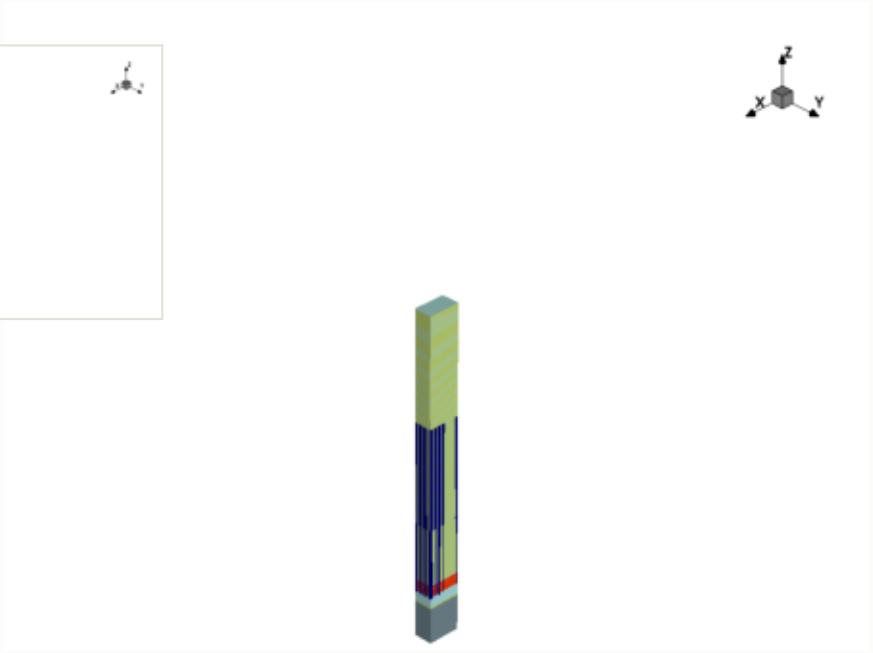

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

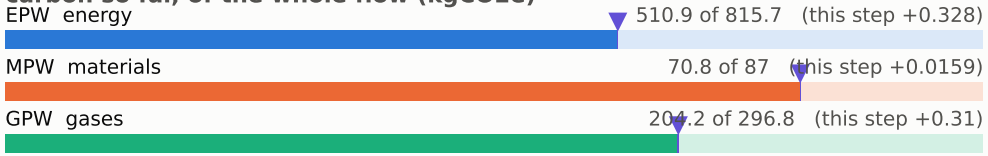

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

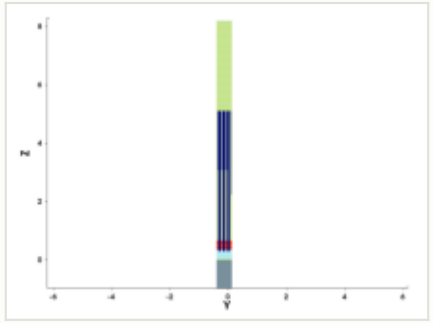

y cut at -0.150 µm

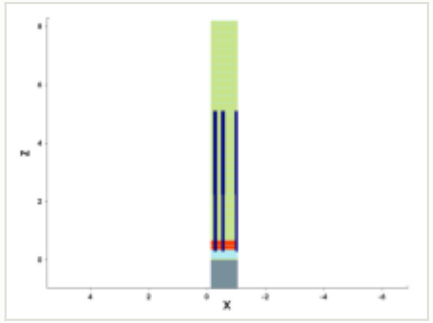

mask for this step

no mask for this step

steps by process area

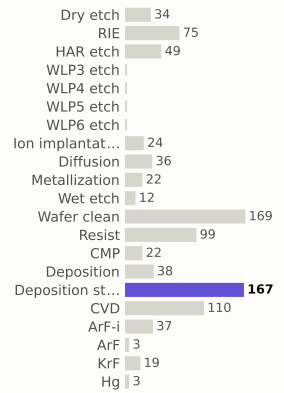

materials deposited (g)

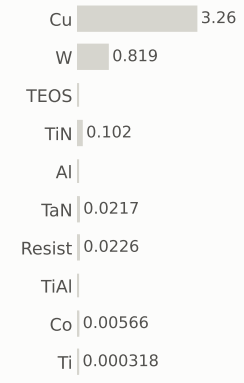

gases emitted (g)

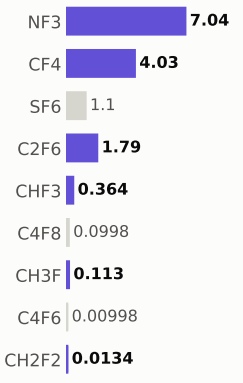

Step #18040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	786.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

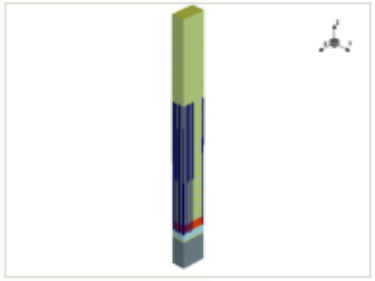

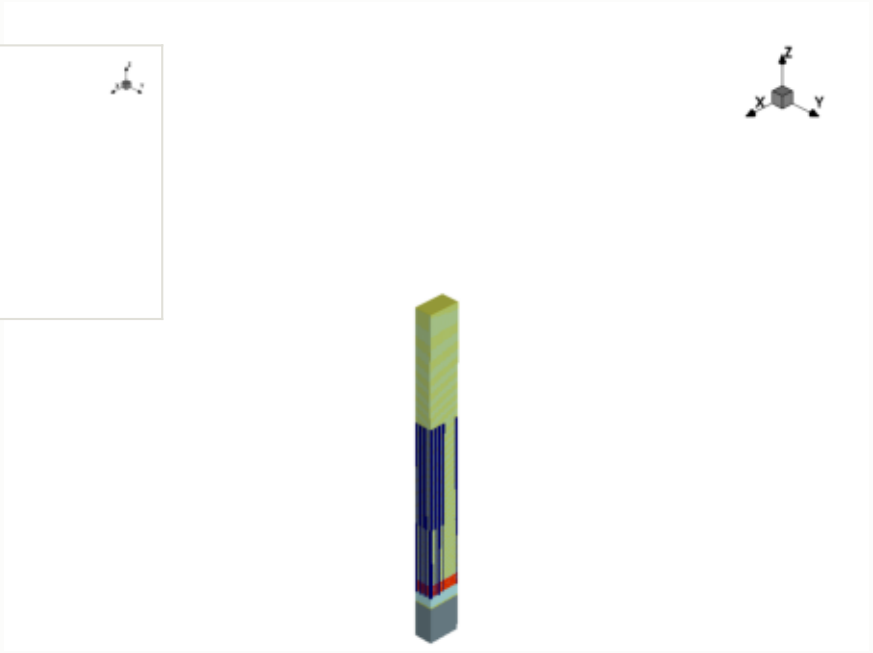

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

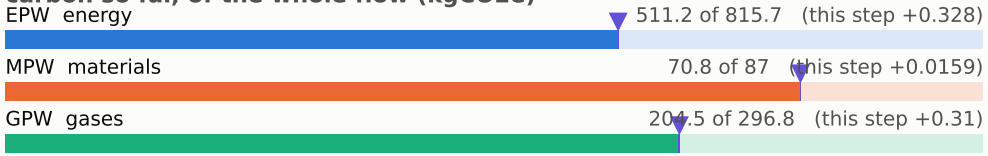

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

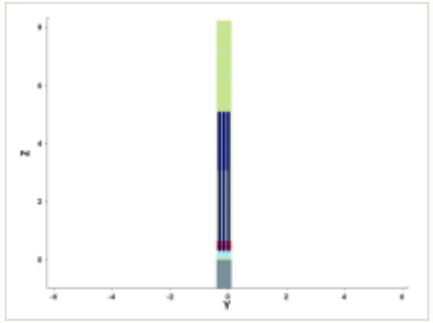

y cut at -0.150 µm

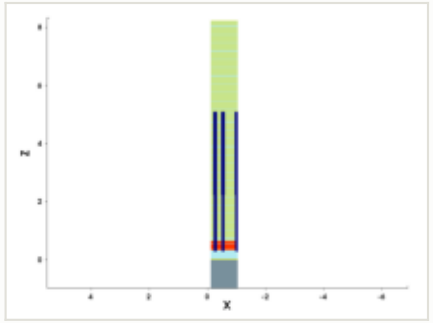

mask for this step

no mask for this step

steps by process area

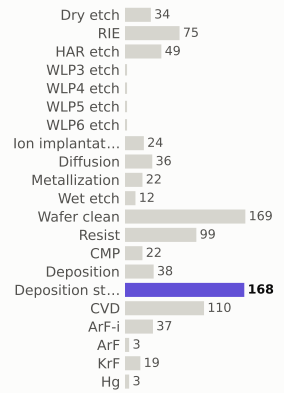

materials deposited (g)

gases emitted (g)

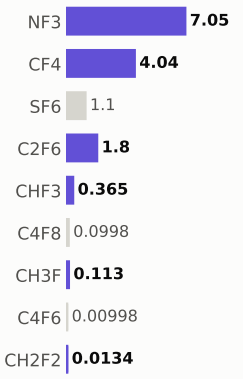

Step #18050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	787.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

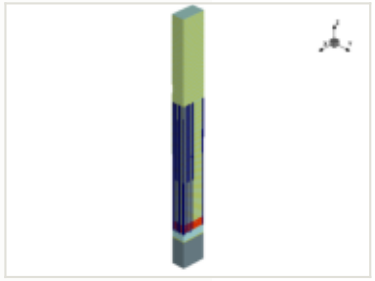

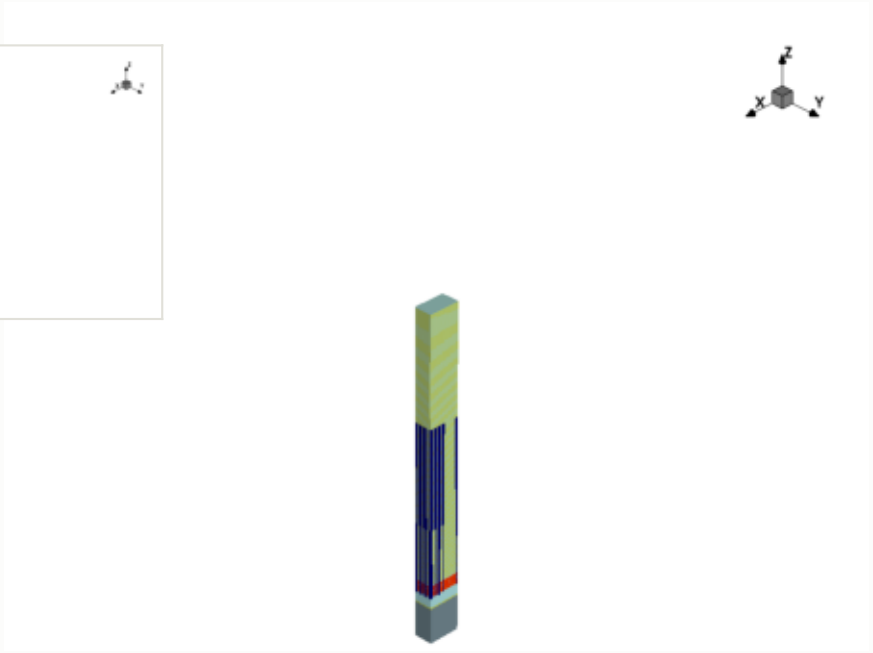

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

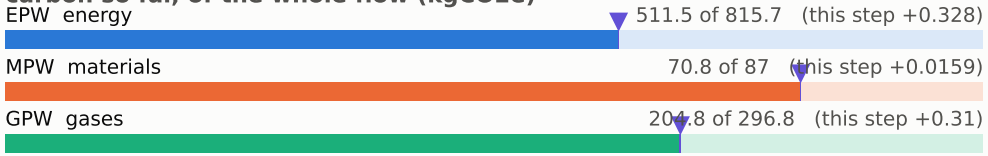

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

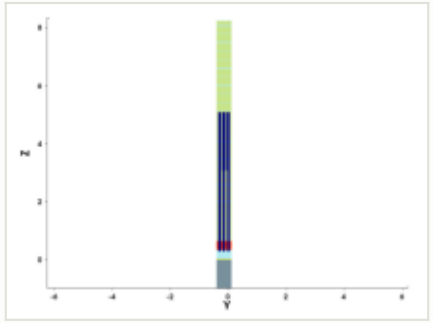

y cut at -0.150 µm

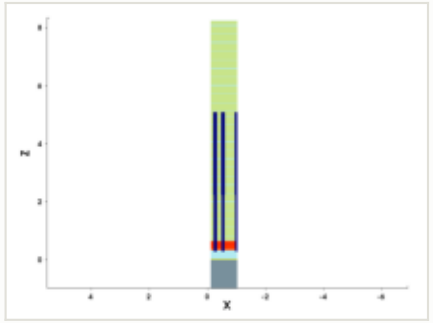

mask for this step

no mask for this step

steps by process area

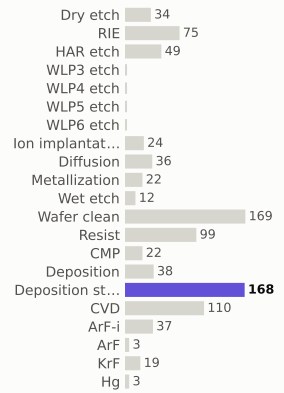

materials deposited (g)

gases emitted (g)

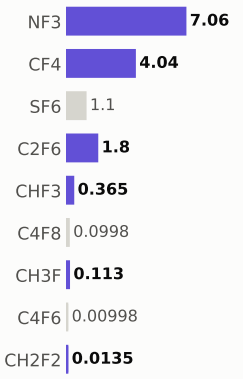

Step #18060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	787.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

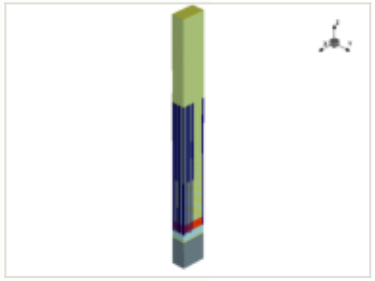

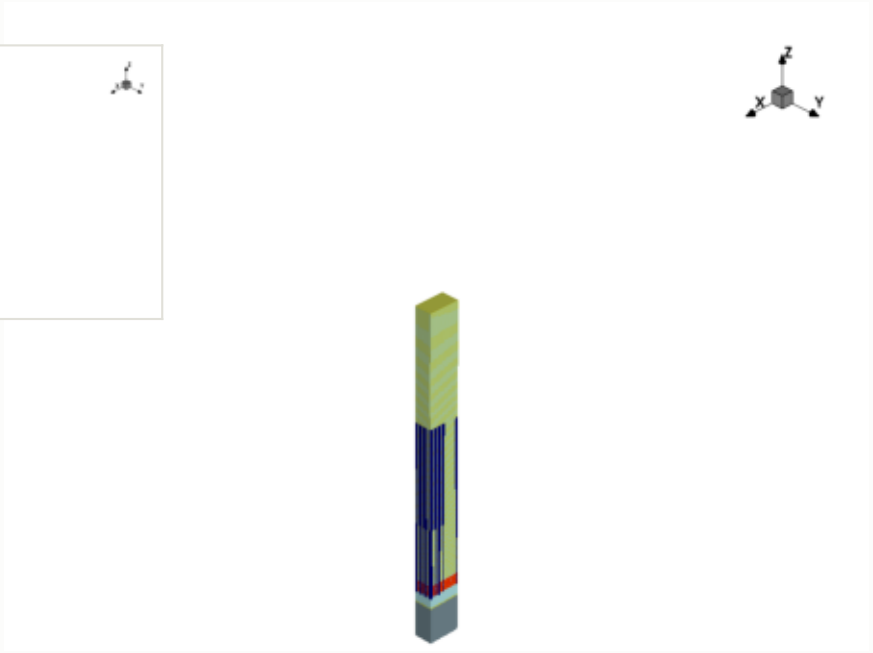

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

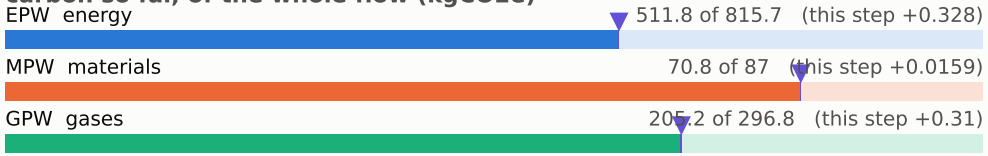

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

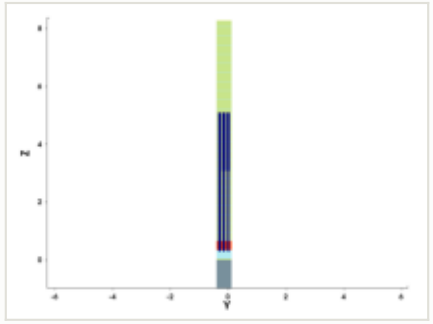

y cut at -0.150 µm

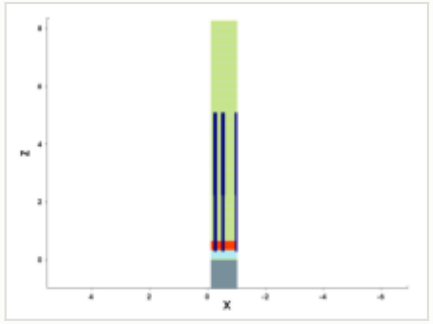

mask for this step

no mask for this step

steps by process area

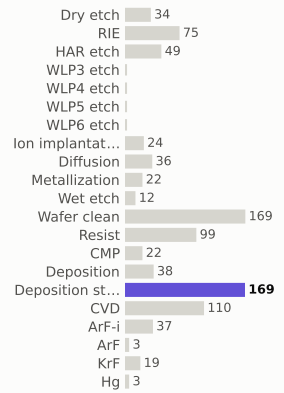

materials deposited (g)

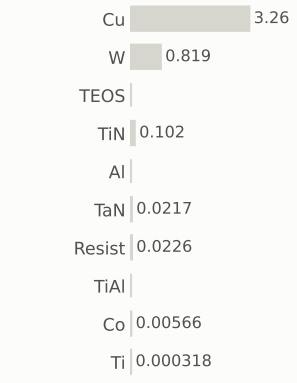

gases emitted (g)

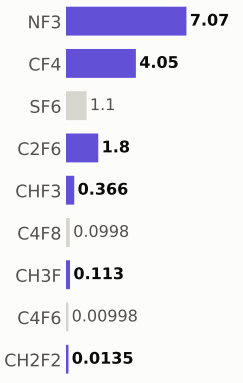

Step #18070: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	788.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

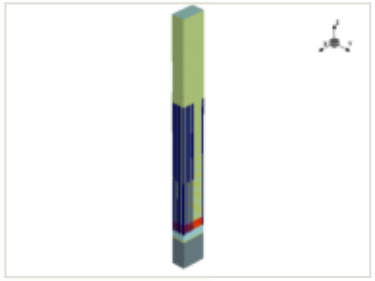

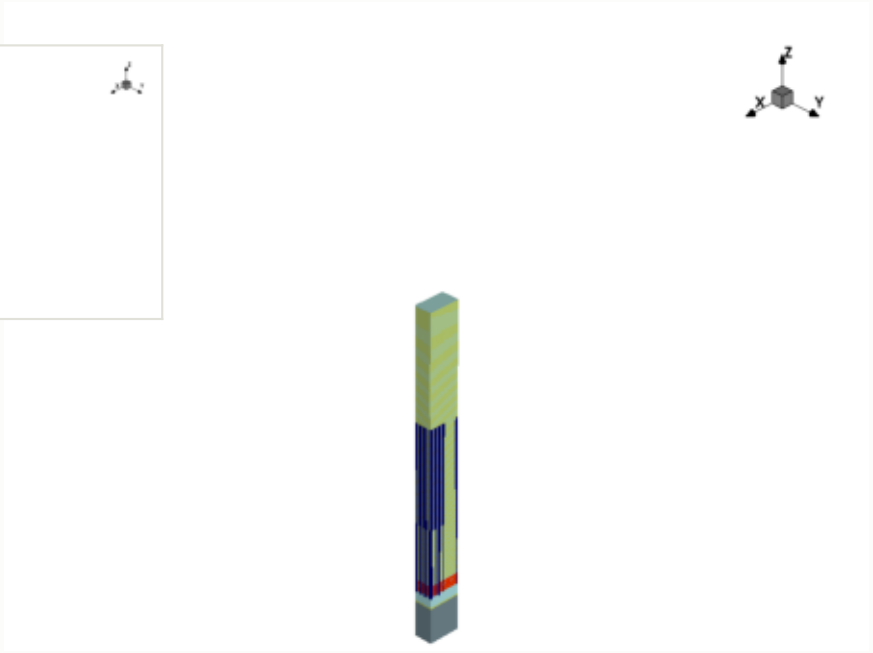

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

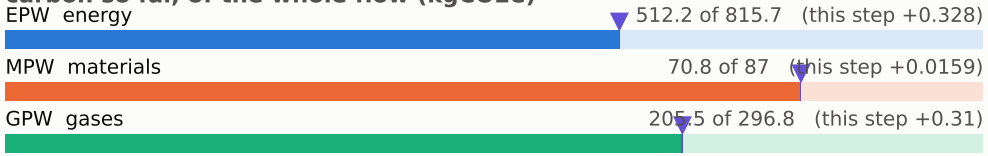

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

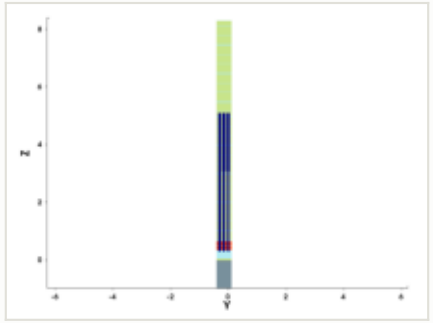

y cut at -0.150 µm

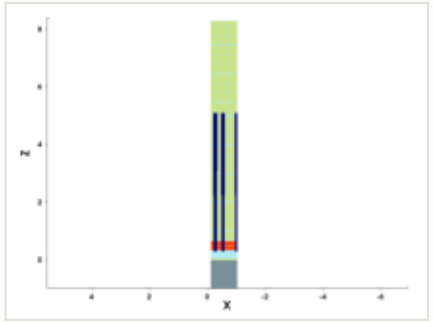

mask for this step

no mask for this step

steps by process area

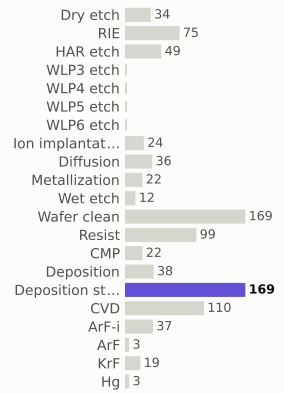

materials deposited (g)

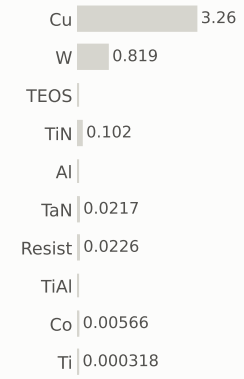

gases emitted (g)

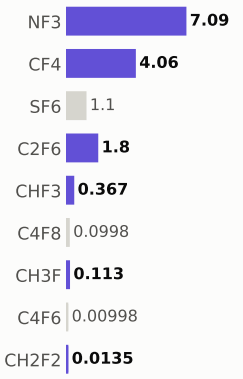

Step #18080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	789.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

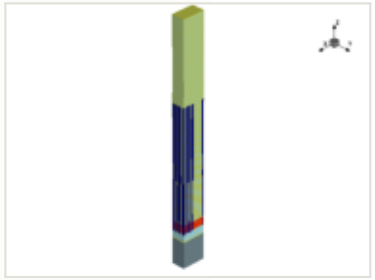

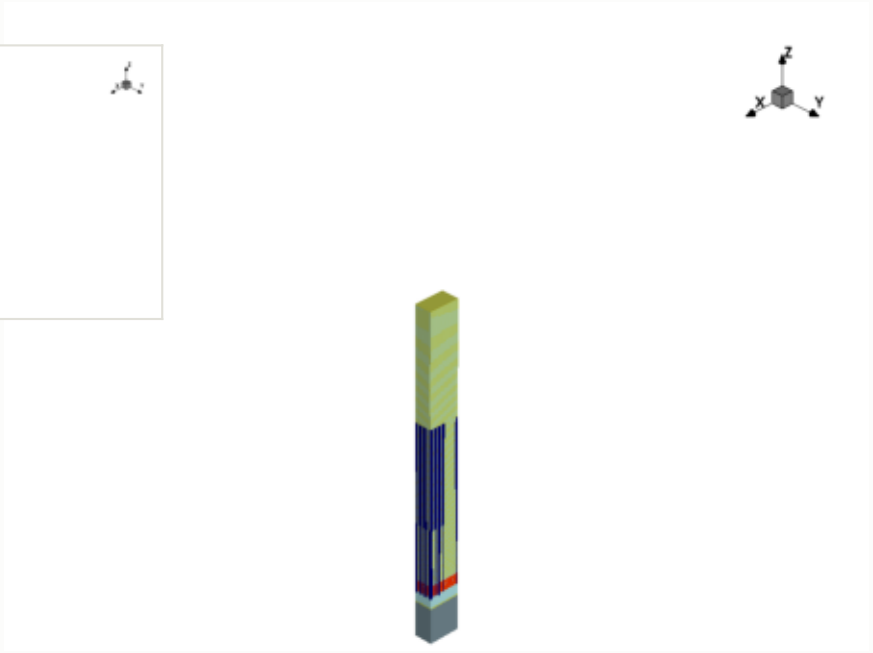

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

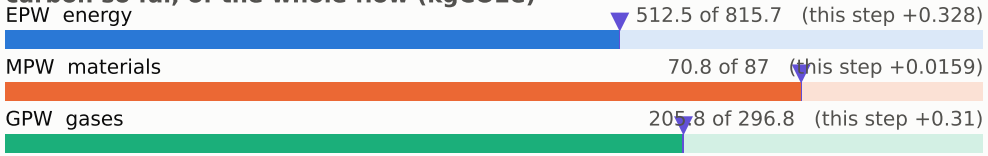

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

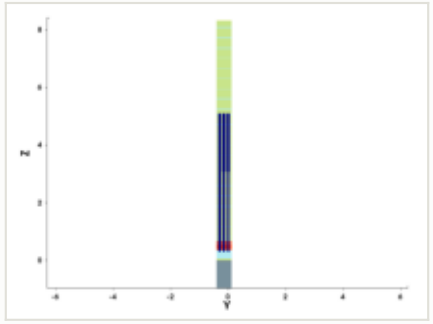

y cut at -0.150 µm

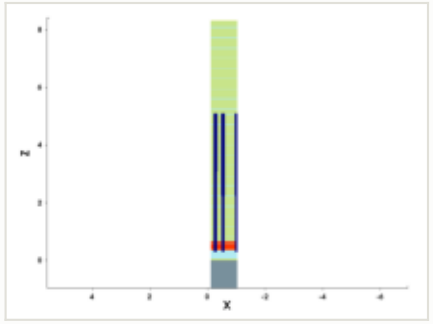

mask for this step

no mask for this step

steps by process area

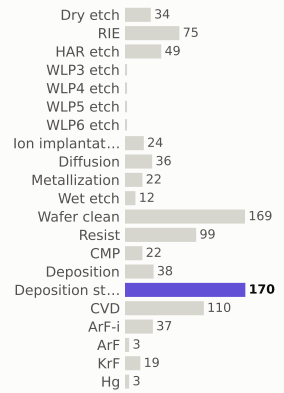

materials deposited (g)

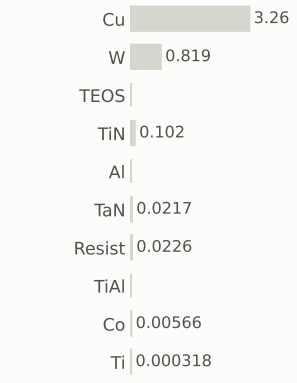

gases emitted (g)

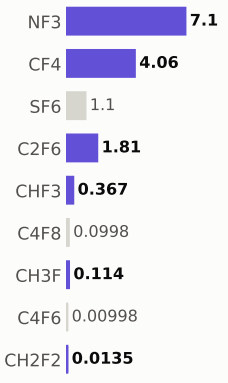

Step #18090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	789.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

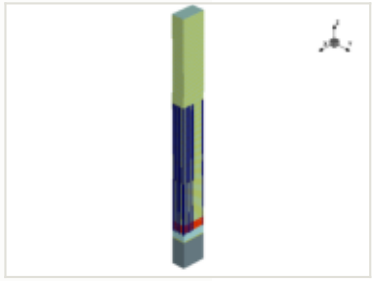

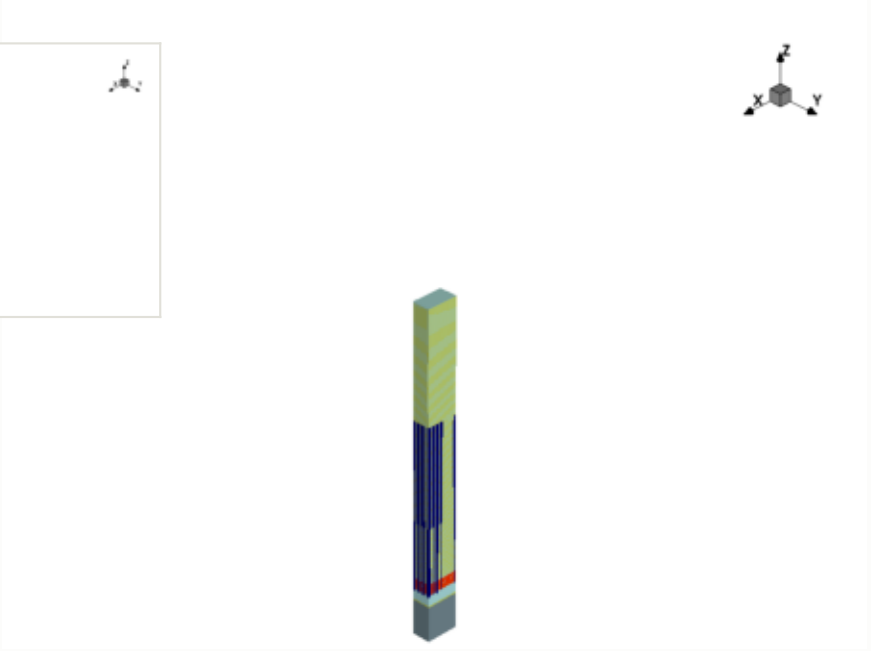

x cut at -0.570 µm

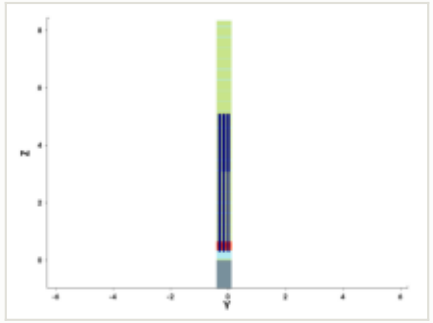

y cut at -0.150 µm

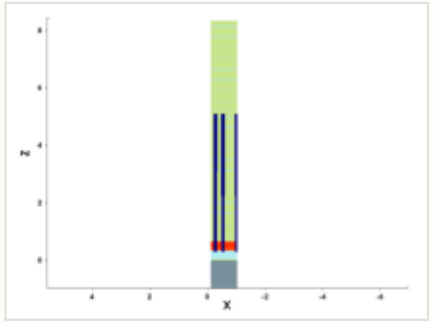

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

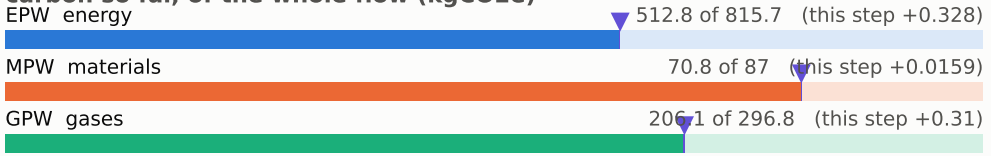

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

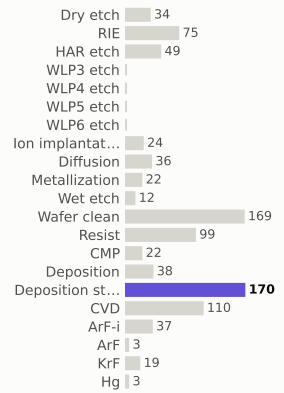

materials deposited (g)

gases emitted (g)

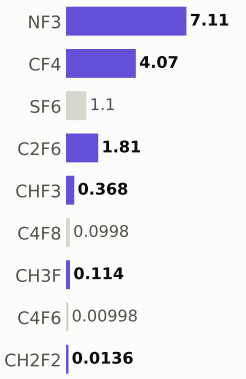

Step #18100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	790.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

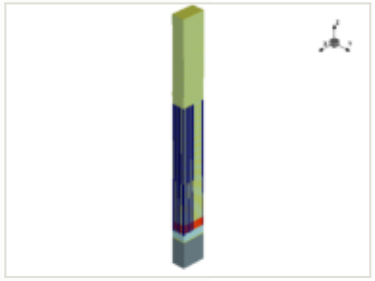

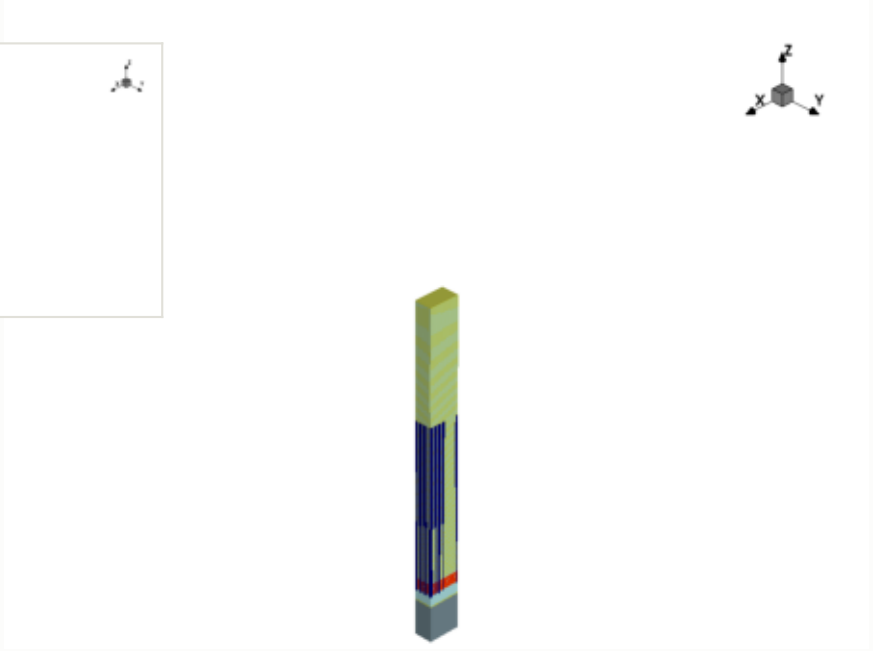

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

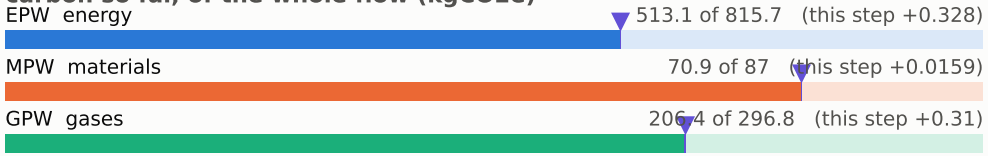

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

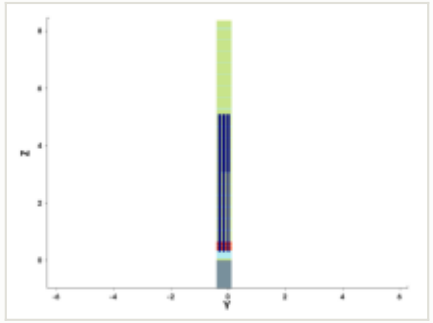

y cut at -0.150 µm

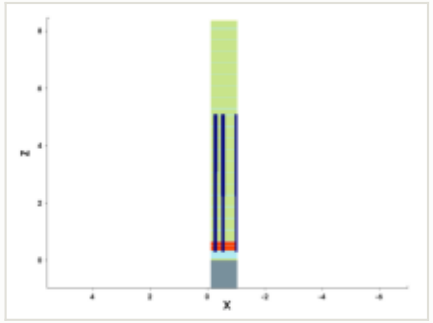

mask for this step

no mask for this step

steps by process area

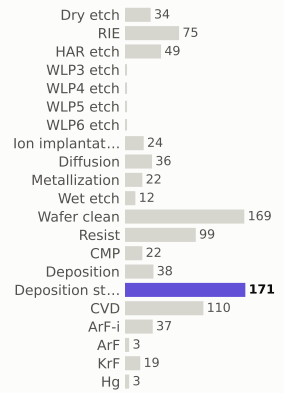

materials deposited (g)

gases emitted (g)

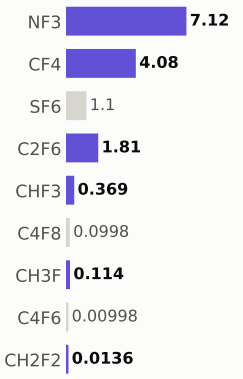

Step #18110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	791.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

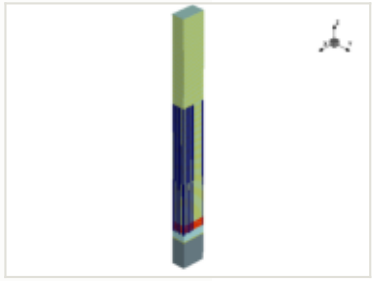

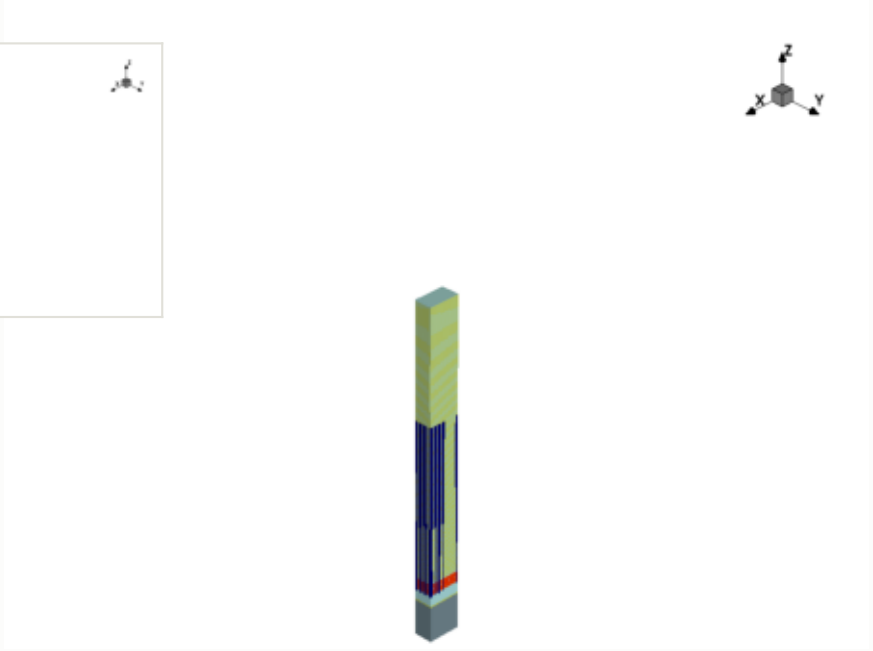

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

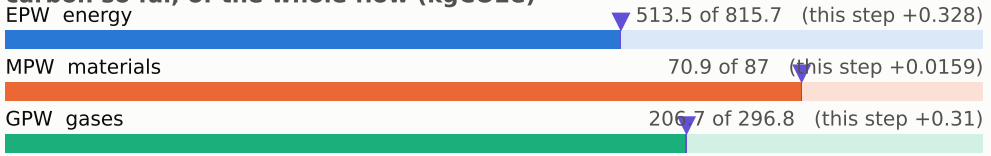

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

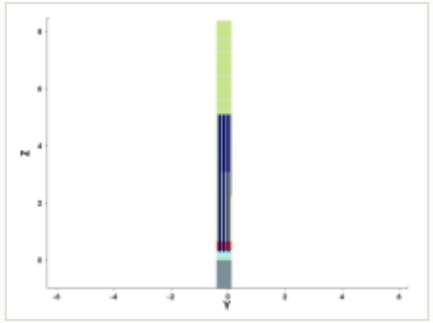

y cut at -0.150 µm

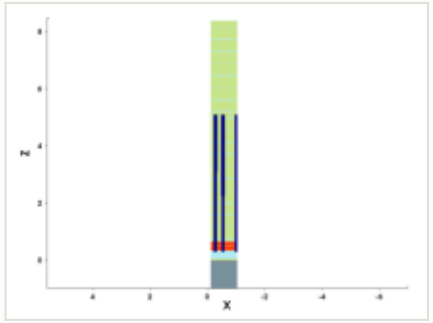

mask for this step

no mask for this step

steps by process area

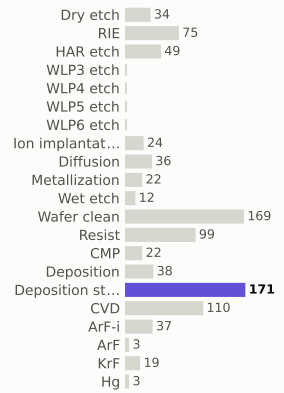

materials deposited (g)

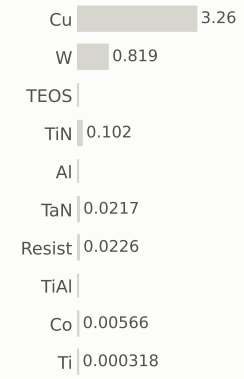

gases emitted (g)

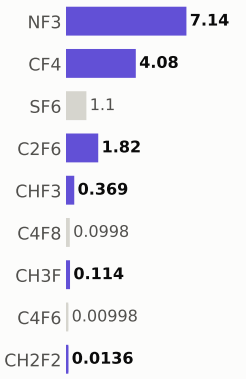

Step #18120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	791.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

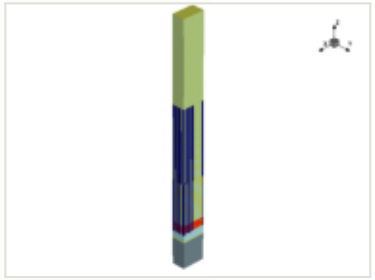

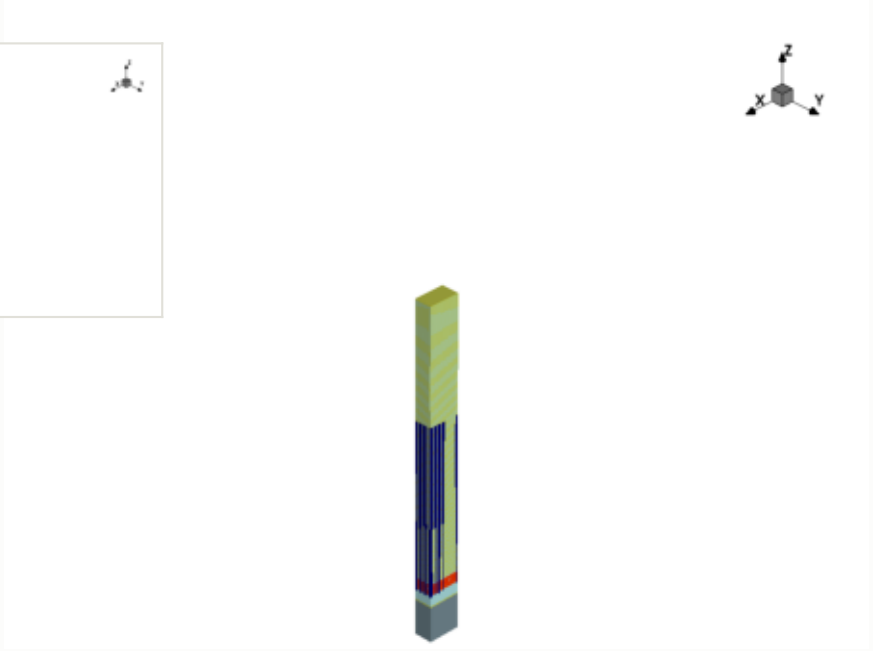

x cut at -0.570 µm

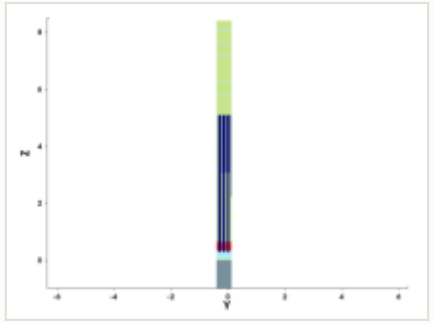

y cut at -0.150 µm

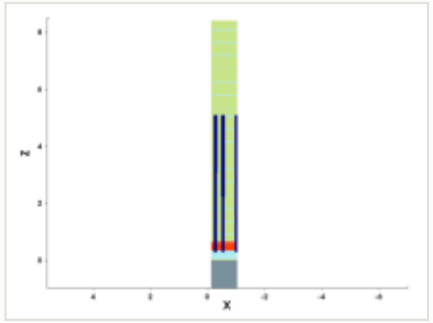

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

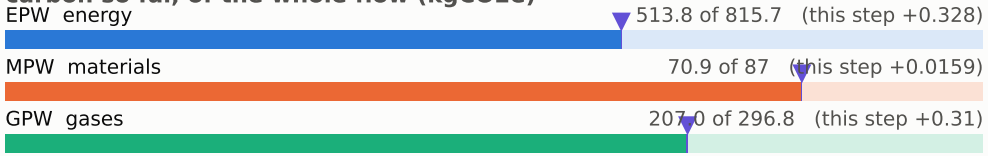

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

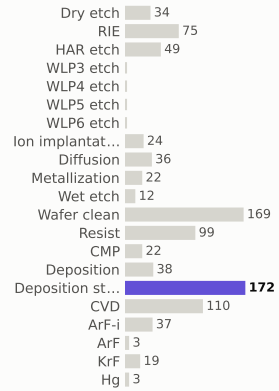

materials deposited (g)

gases emitted (g)

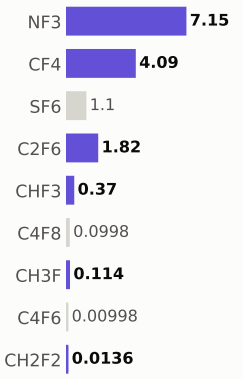

Step #18130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	792.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

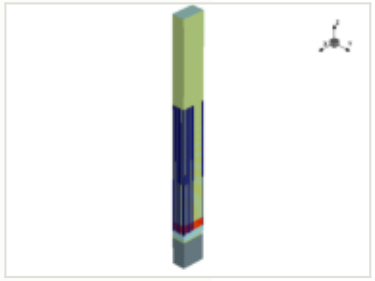

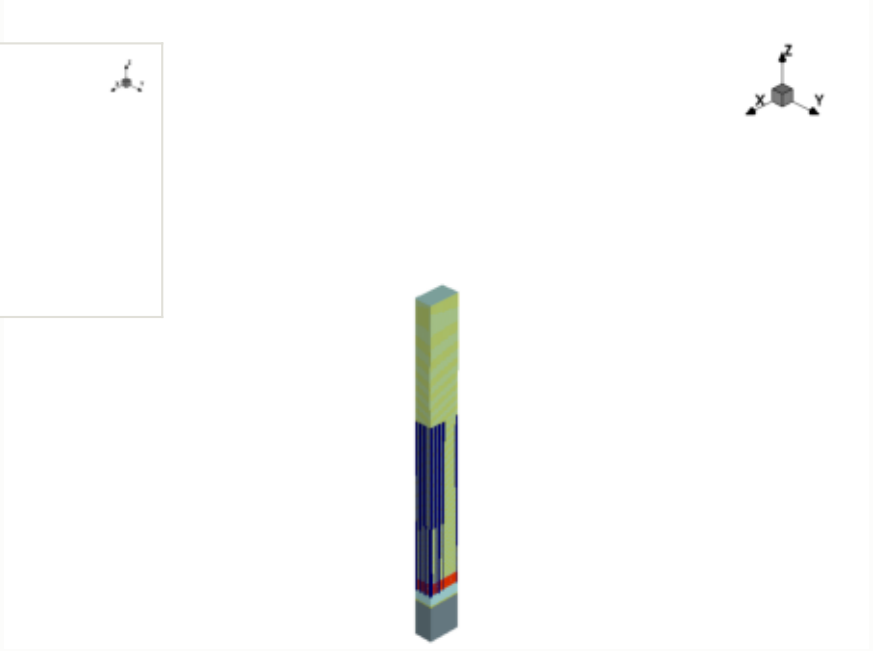

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

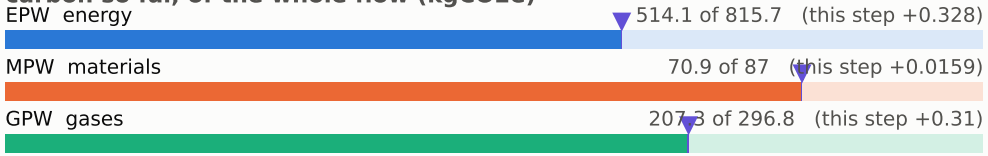

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

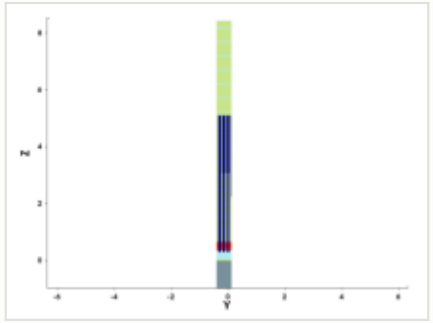

y cut at -0.150 µm

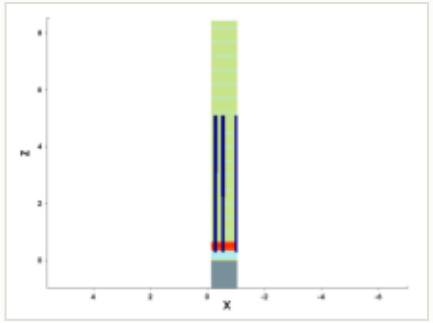

mask for this step

no mask for this step

steps by process area

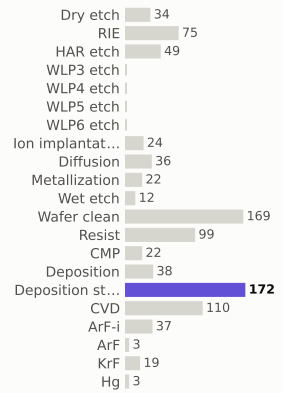

materials deposited (g)

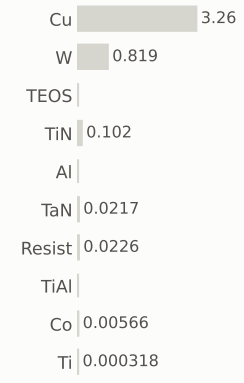

gases emitted (g)

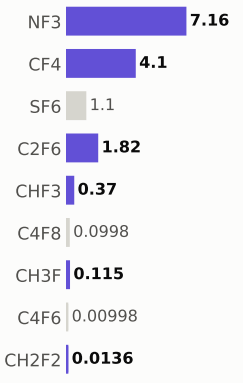

Step #18140: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	793.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

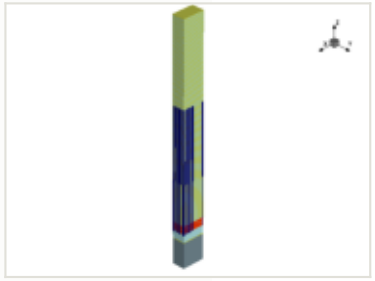

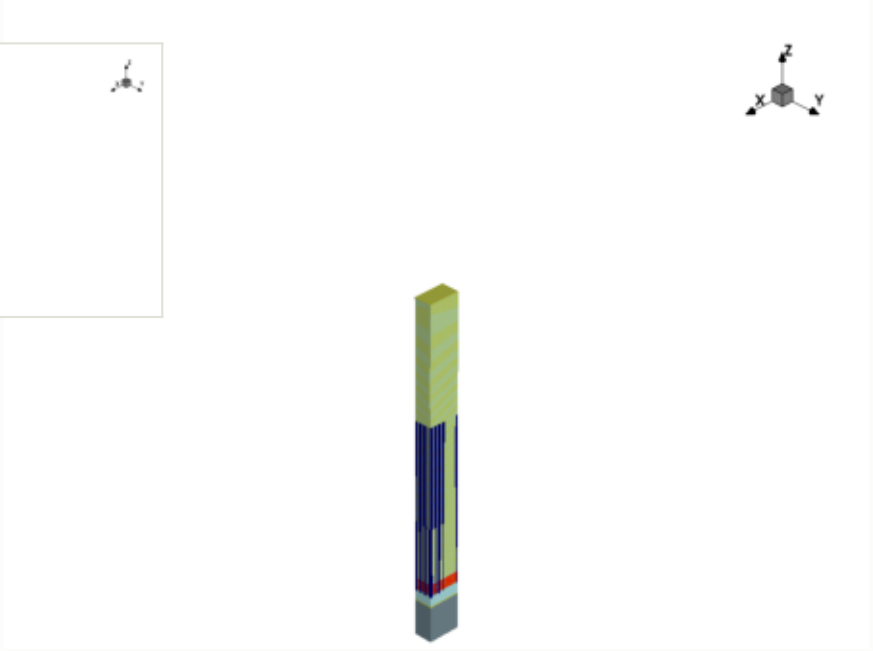

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

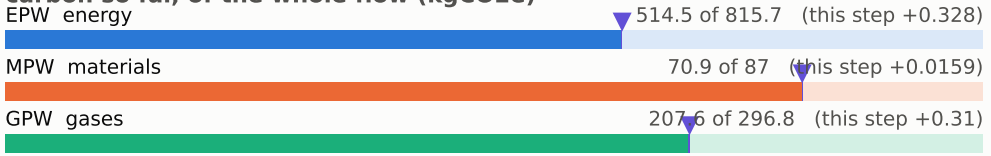

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

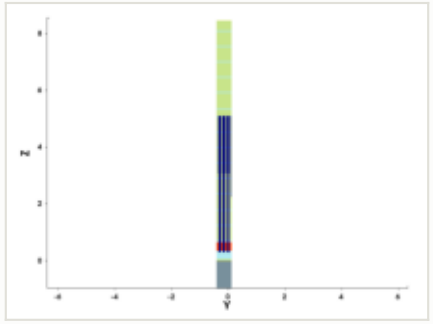

y cut at -0.150 µm

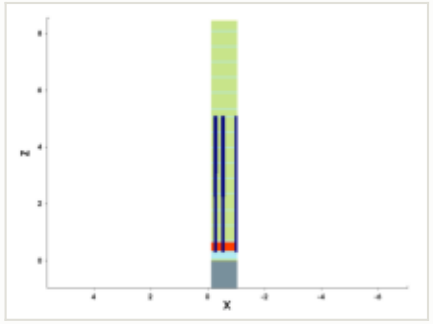

mask for this step

no mask for this step

steps by process area

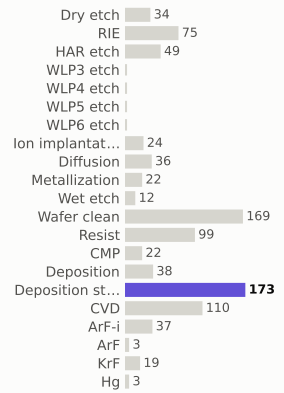

materials deposited (g)

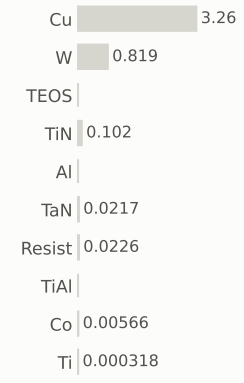

gases emitted (g)

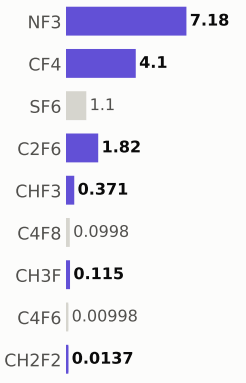

Step #18150: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	793.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

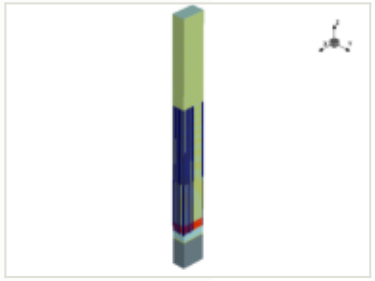

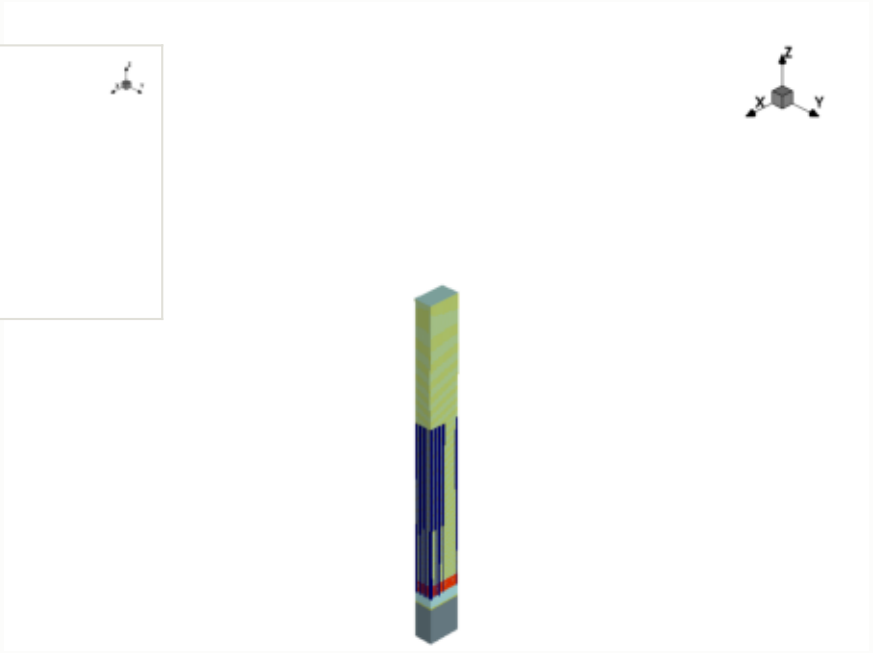

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

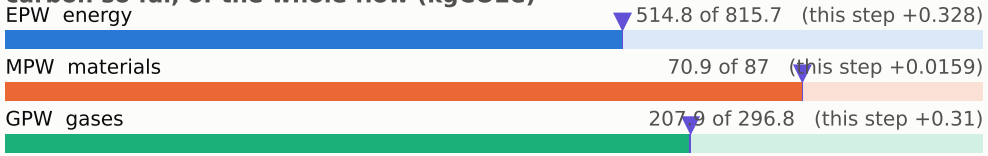

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

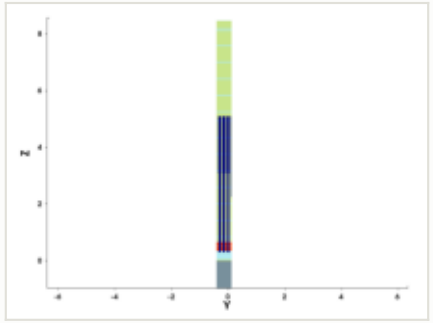

y cut at -0.150 µm

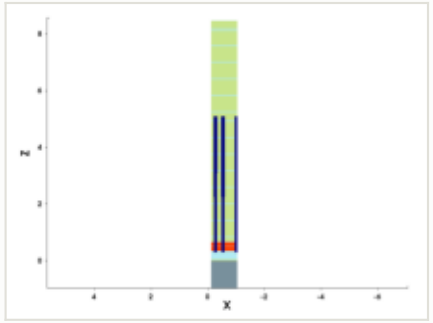

mask for this step

no mask for this step

steps by process area

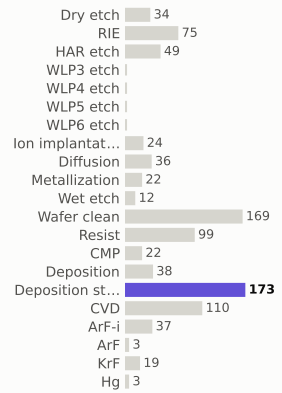

materials deposited (g)

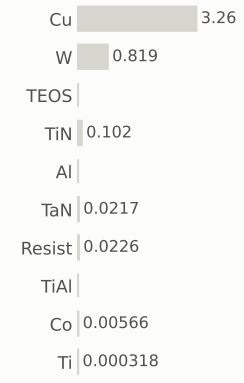

gases emitted (g)

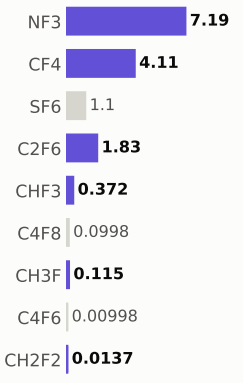

Step #18160: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	794.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

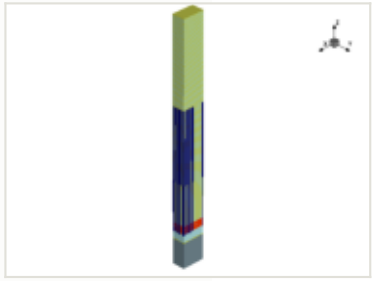

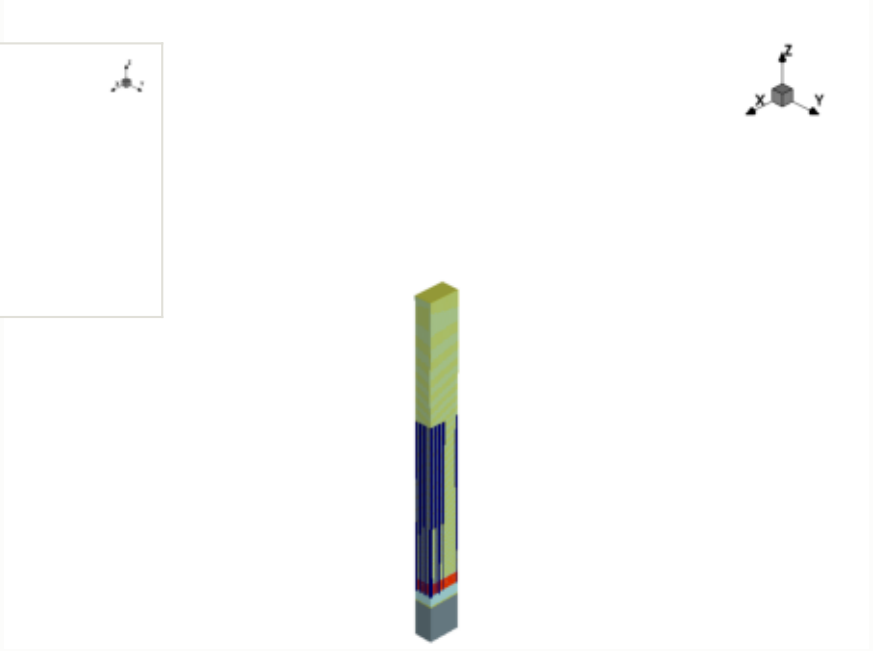

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

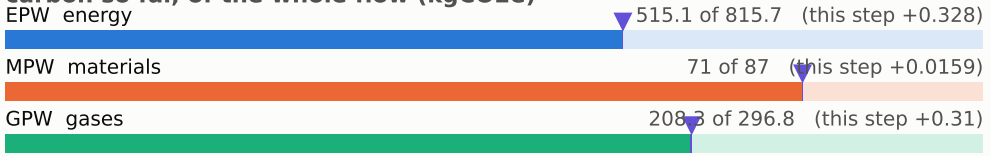

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

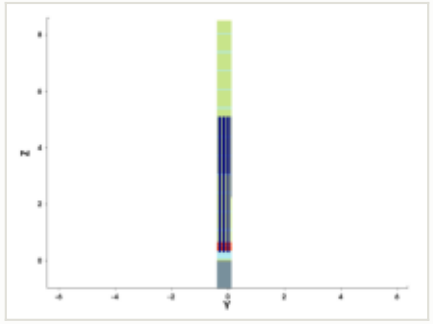

y cut at -0.150 µm

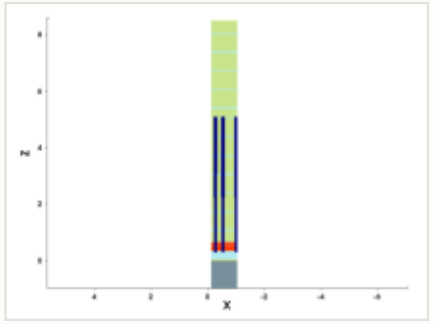

mask for this step

no mask for this step

steps by process area

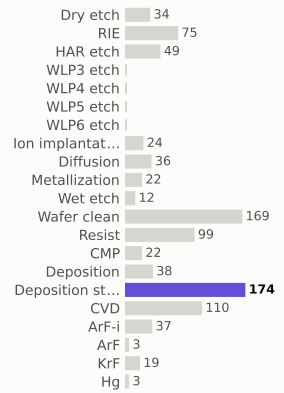

materials deposited (g)

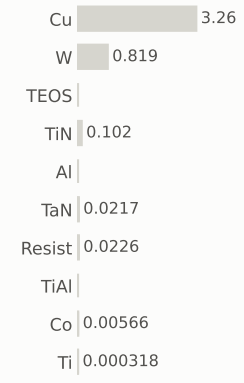

gases emitted (g)

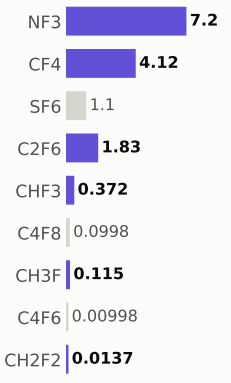

Step #18170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	795.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

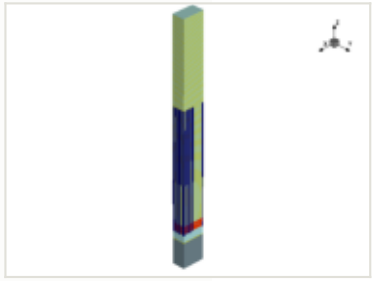

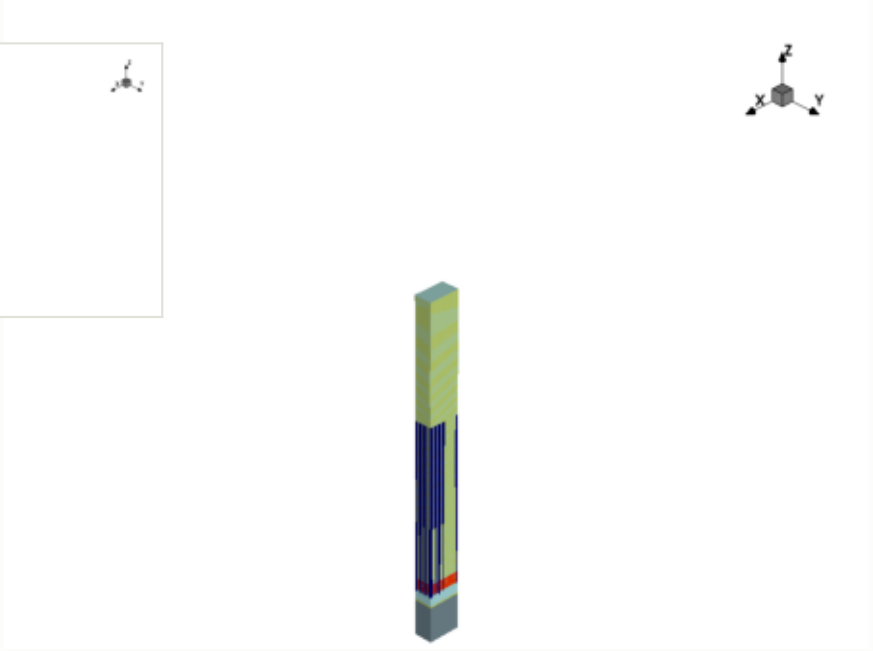

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

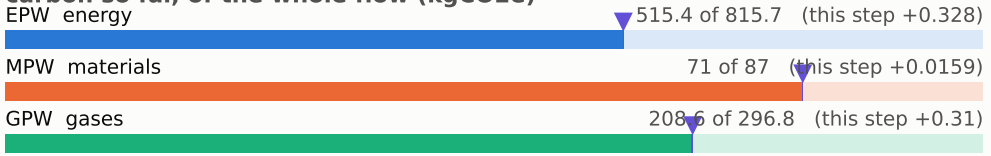

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

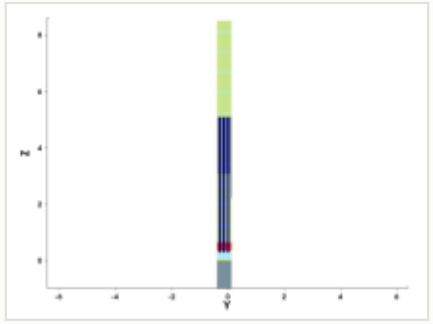

y cut at -0.150 µm

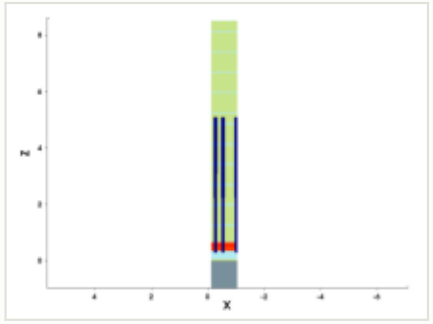

mask for this step

no mask for this step

steps by process area

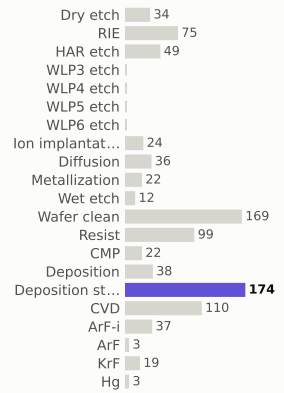

materials deposited (g)

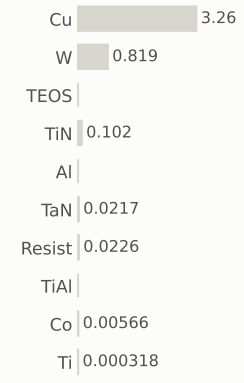

gases emitted (g)

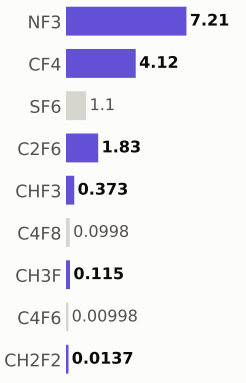

Step #18180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	795.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

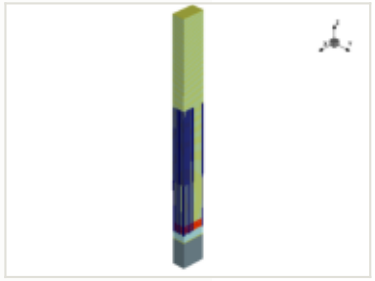

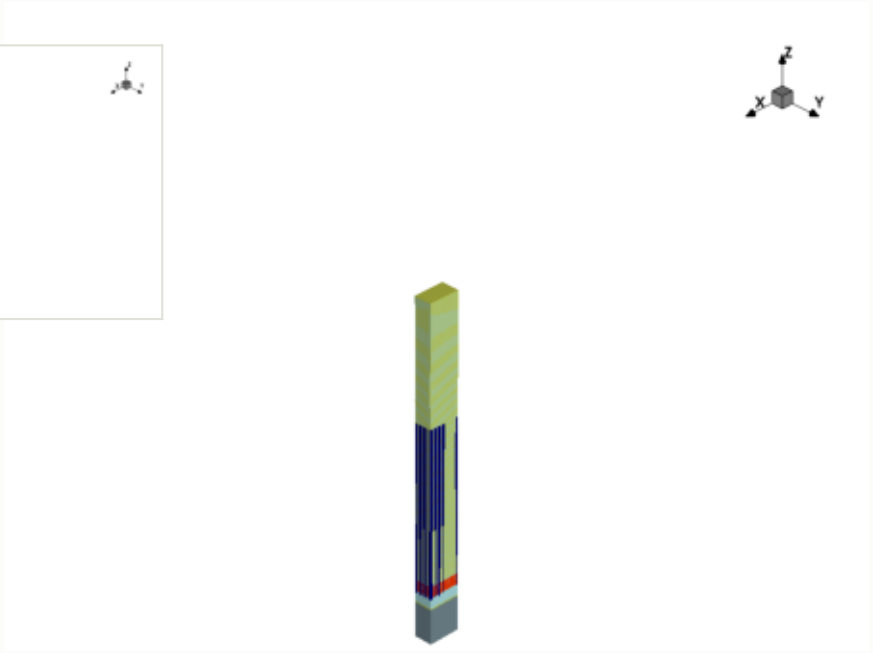

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

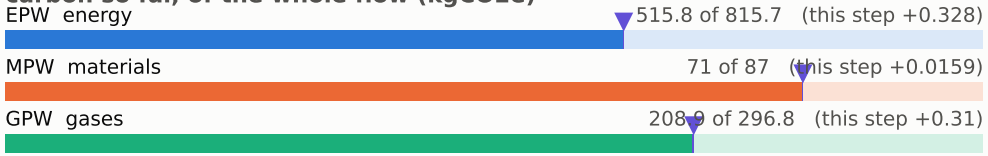

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

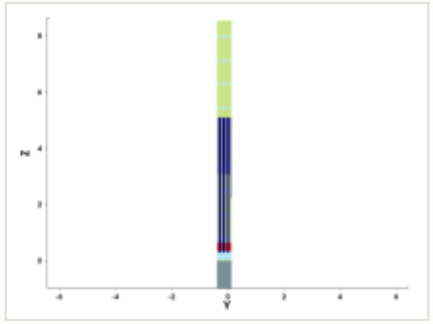

y cut at -0.150 µm

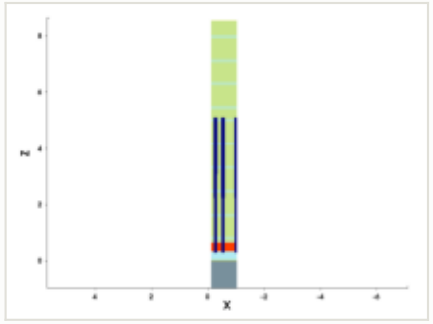

mask for this step

no mask for this step

steps by process area

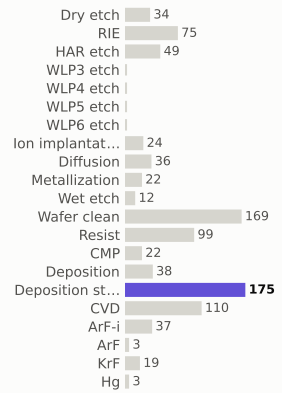

materials deposited (g)

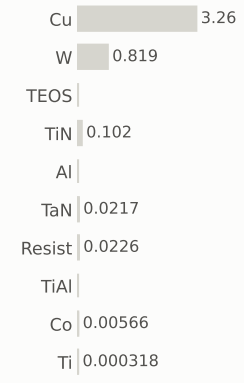

gases emitted (g)

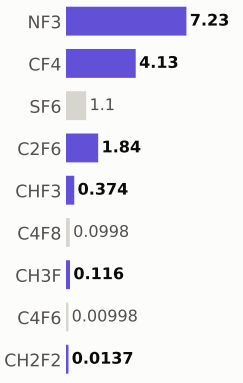

Step #18190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	796.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

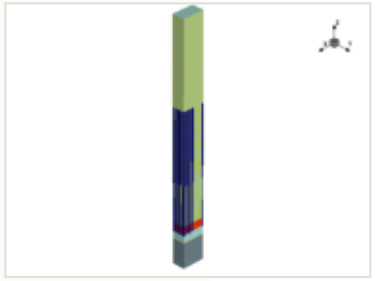

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

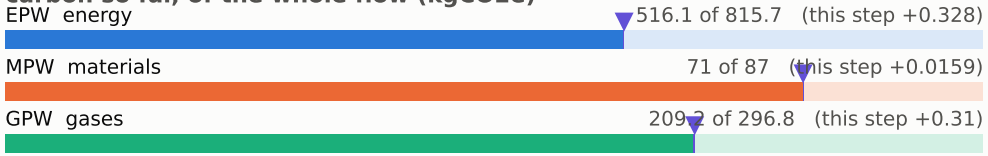

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

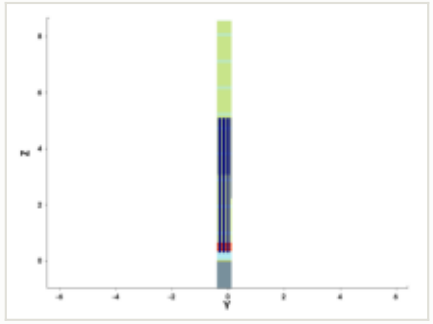

y cut at -0.150 µm

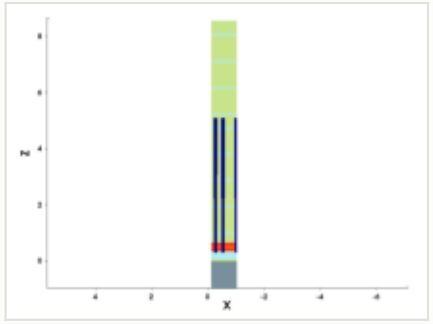

mask for this step

no mask for this step

steps by process area

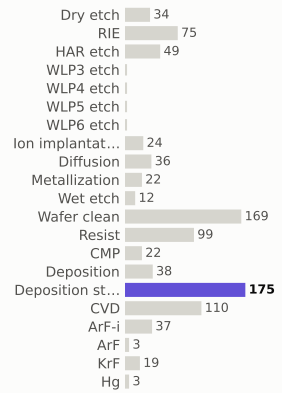

materials deposited (g)

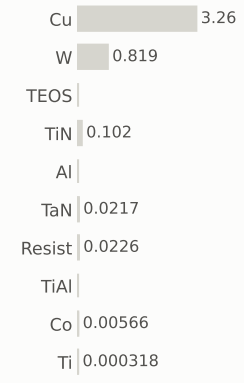

gases emitted (g)

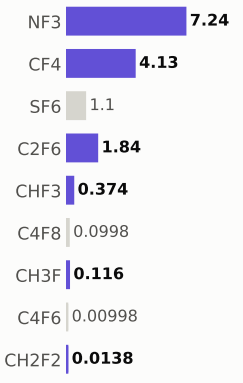

Step #18200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	797.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

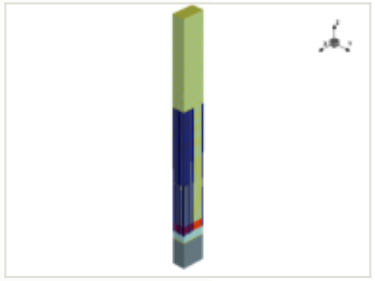

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

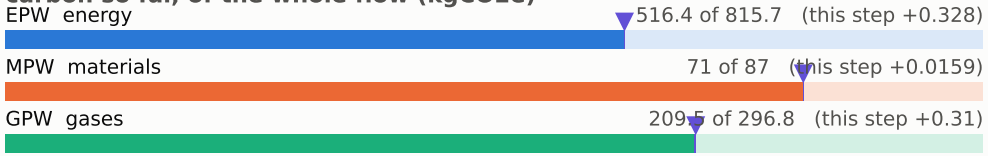

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

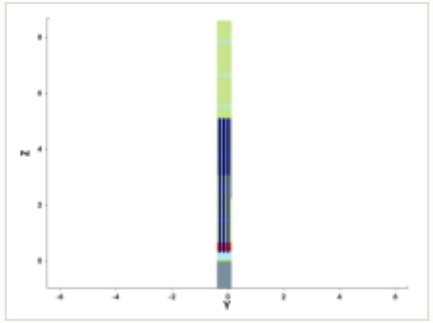

y cut at -0.150 µm

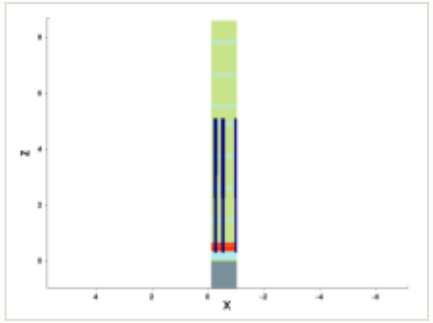

mask for this step

no mask for this step

steps by process area

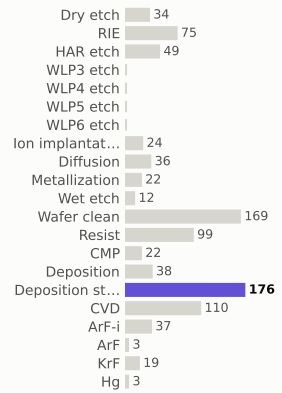

materials deposited (g)

gases emitted (g)

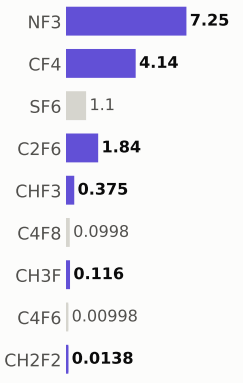

Step #18210: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	797.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

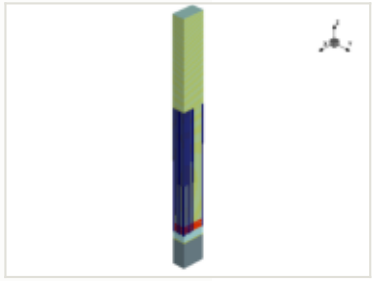

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

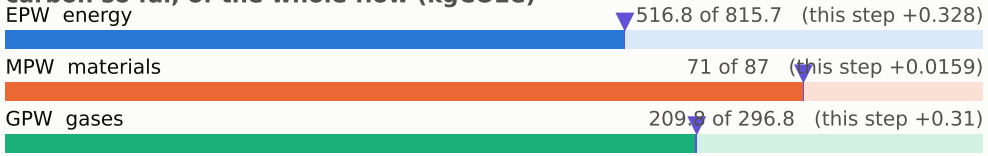

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

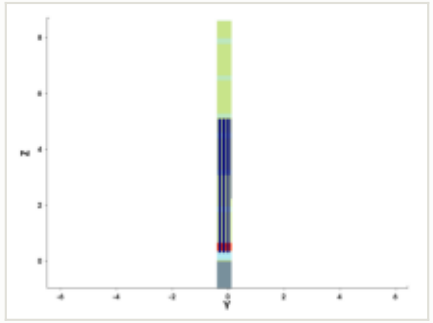

y cut at -0.150 µm

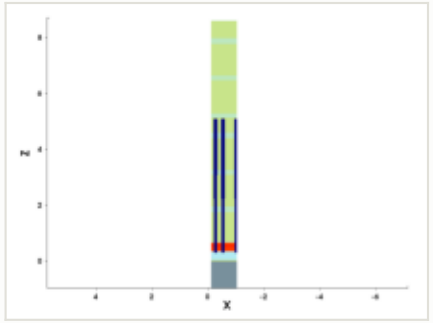

mask for this step

no mask for this step

steps by process area

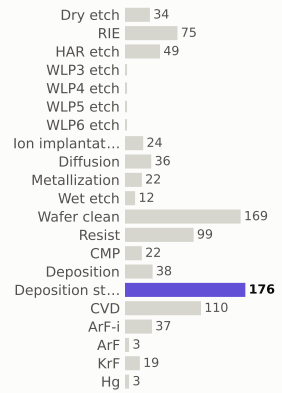

materials deposited (g)

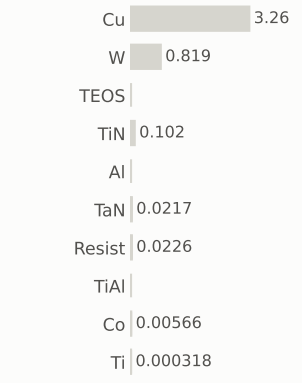

gases emitted (g)

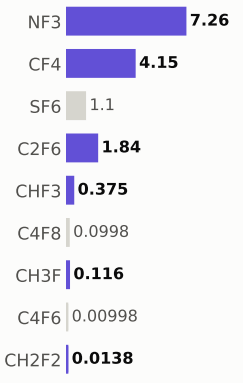

Step #18220: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	798.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

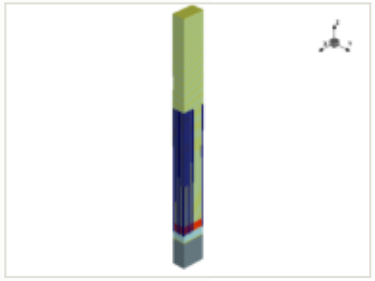

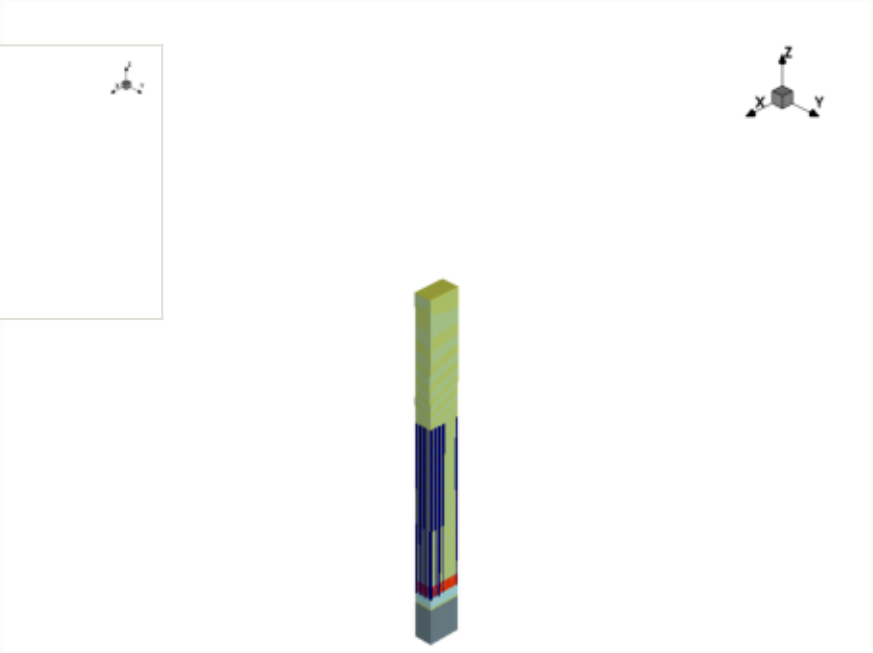

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

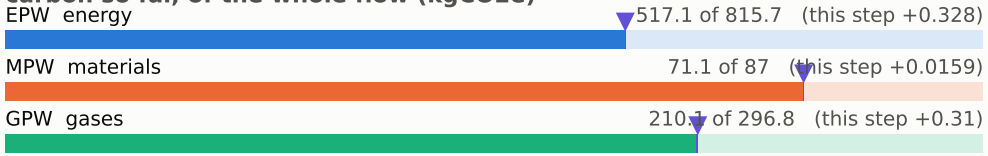

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

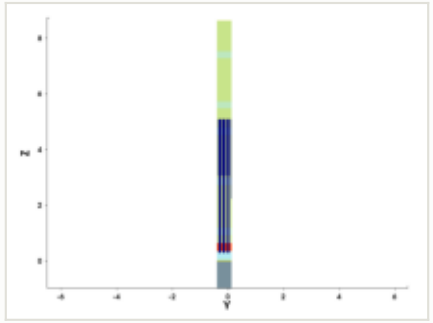

y cut at -0.150 µm

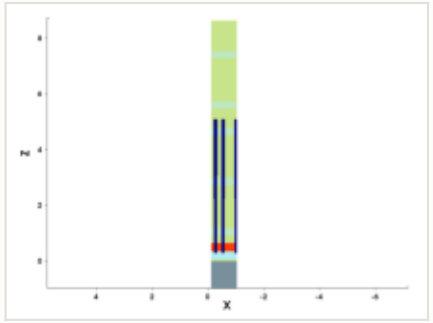

mask for this step

no mask for this step

steps by process area

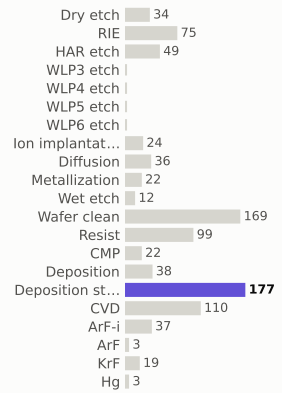

materials deposited (g)

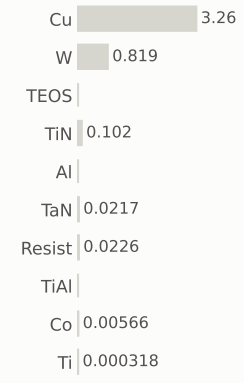

gases emitted (g)

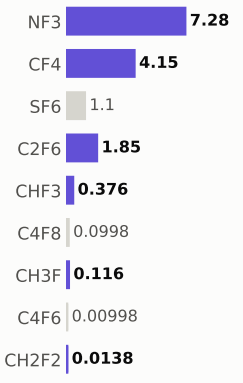

Step #18230: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	798.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

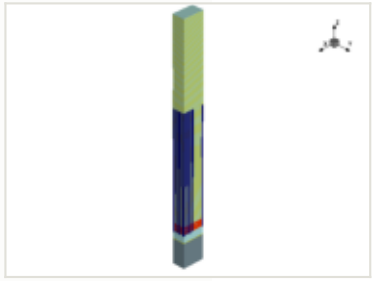

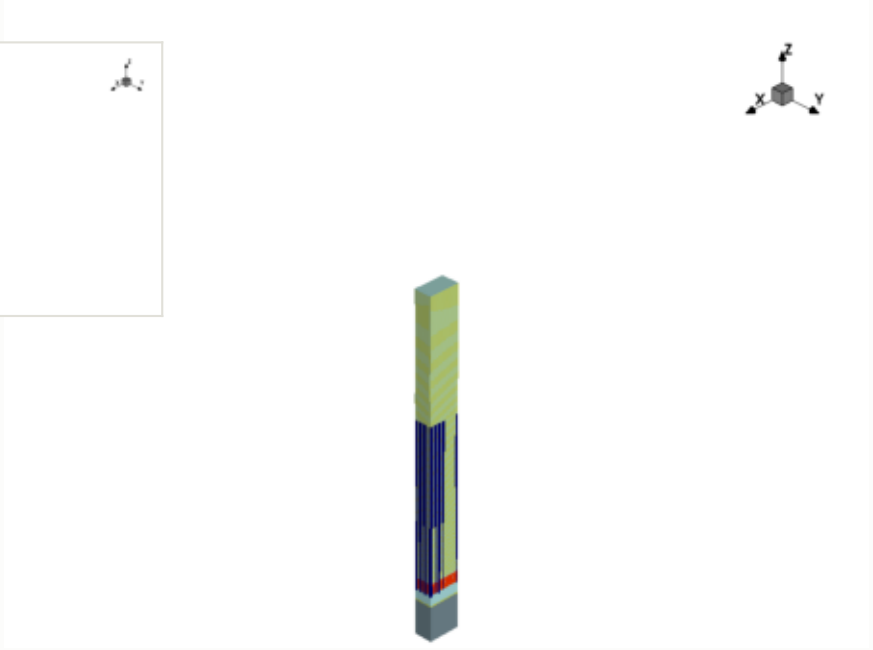

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

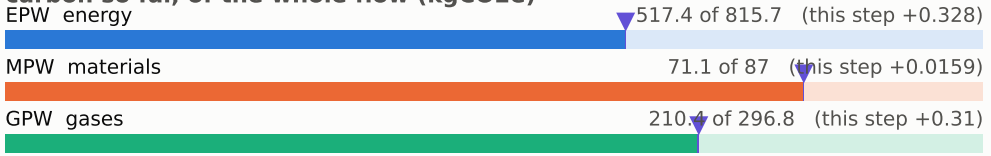

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

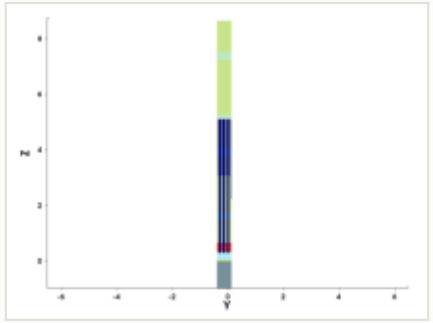

y cut at -0.150 µm

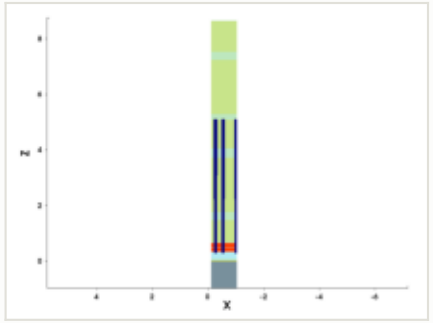

mask for this step

no mask for this step

steps by process area

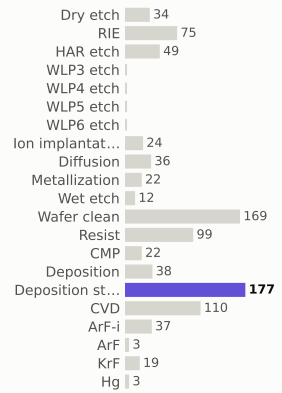

materials deposited (g)

gases emitted (g)

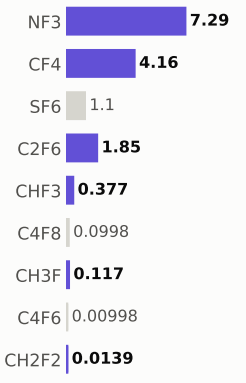

Step #18240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	799.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

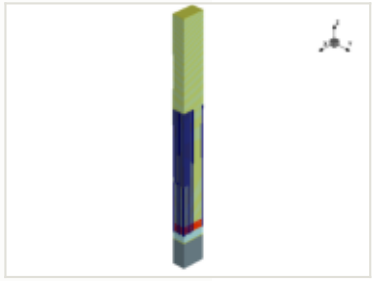

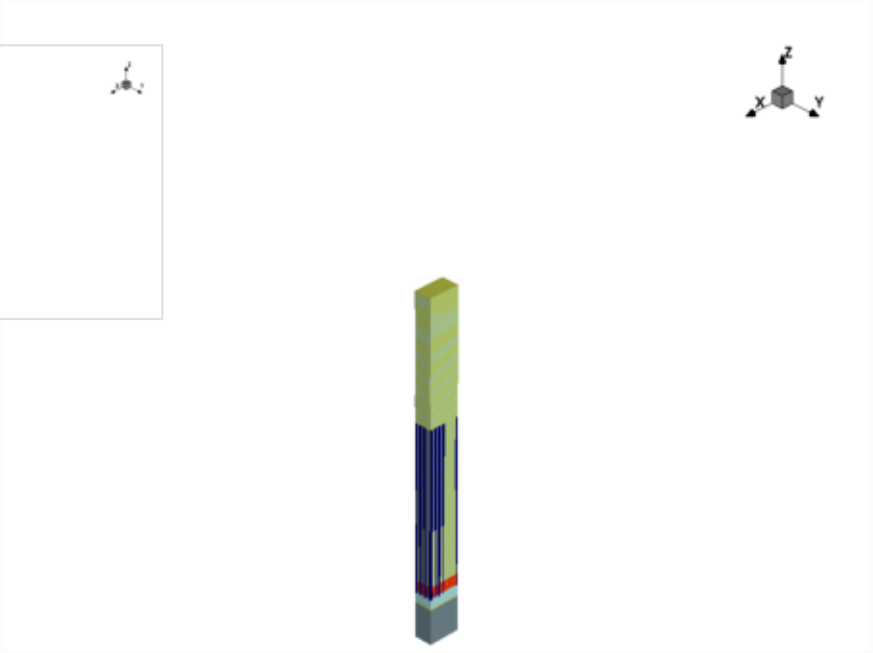

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

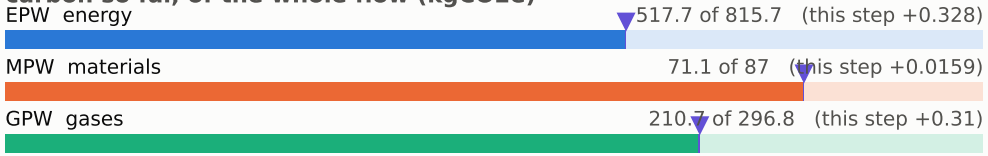

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

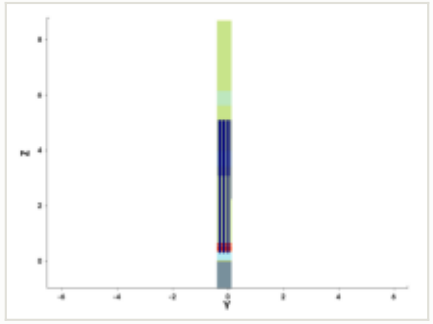

y cut at -0.150 µm

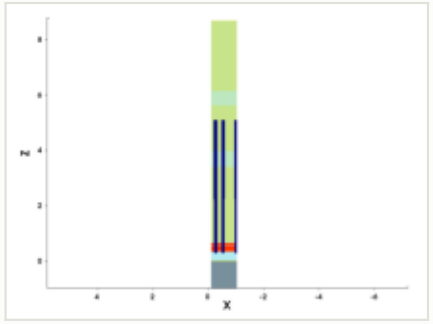

mask for this step

no mask for this step

steps by process area

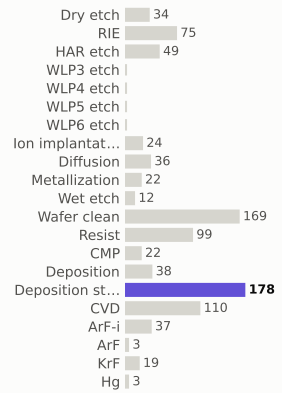

materials deposited (g)

gases emitted (g)

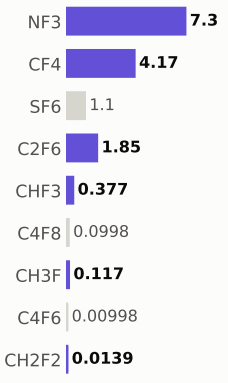

Step #18250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	800.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

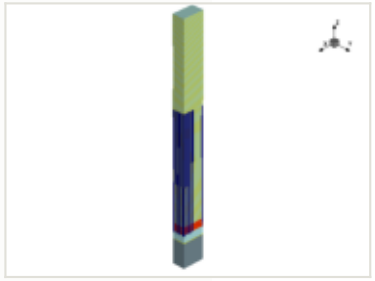

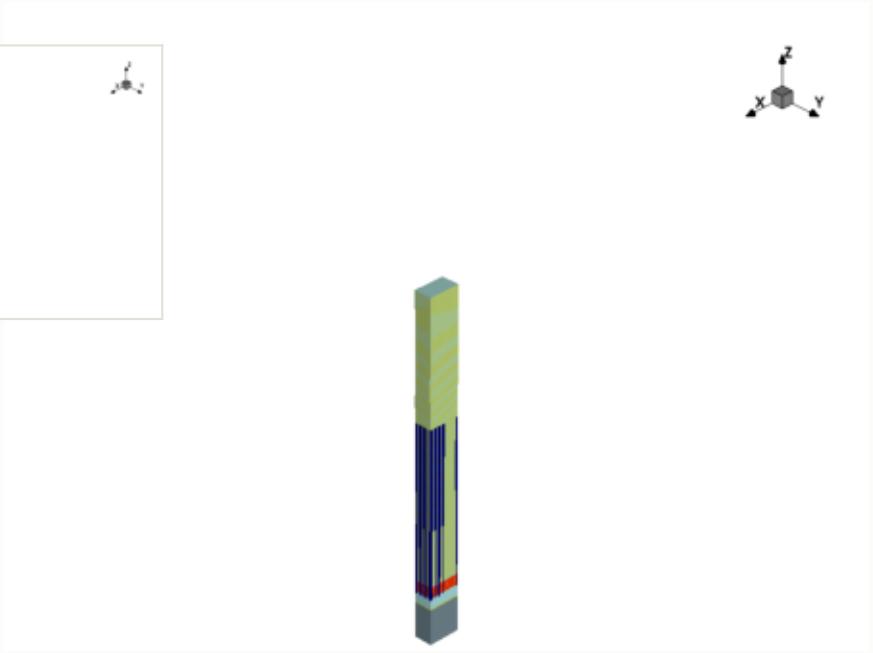

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

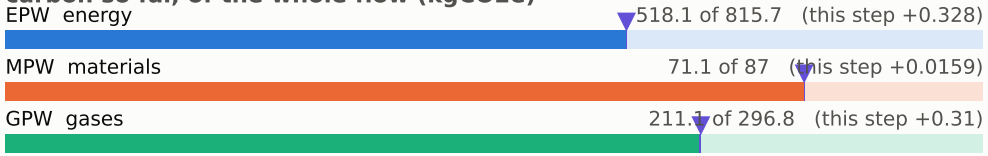

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

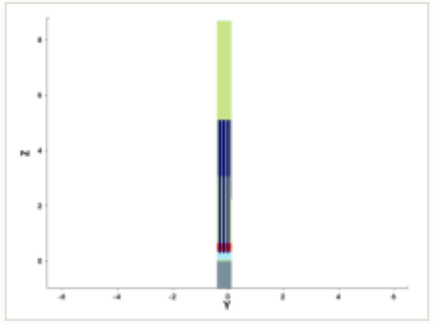

y cut at -0.150 µm

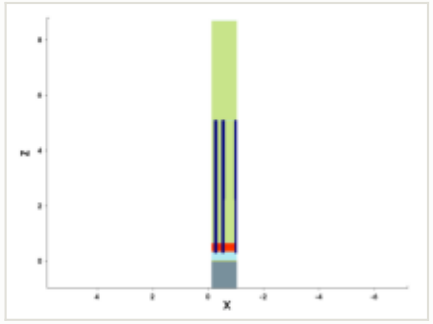

mask for this step

no mask for this step

steps by process area

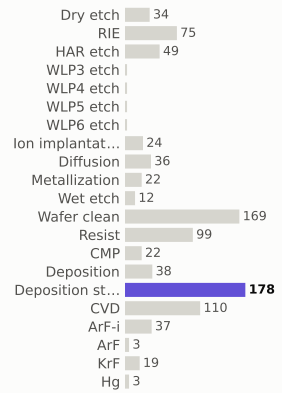

materials deposited (g)

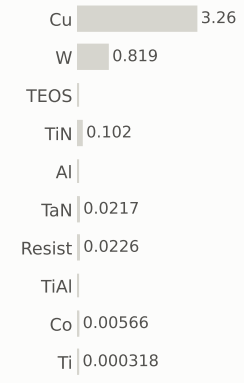

gases emitted (g)

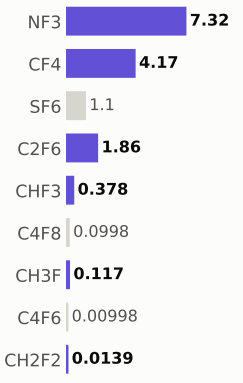

Step #18260: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	800.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

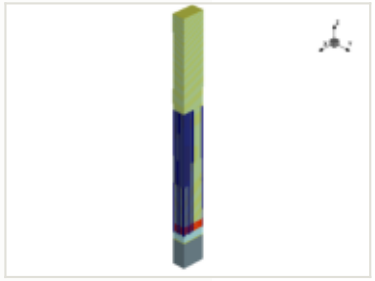

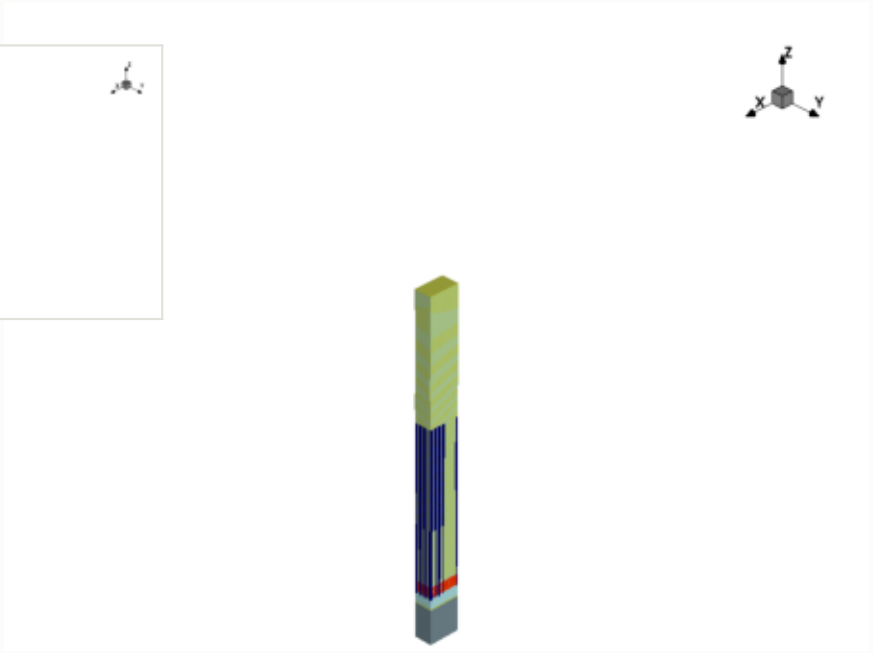

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

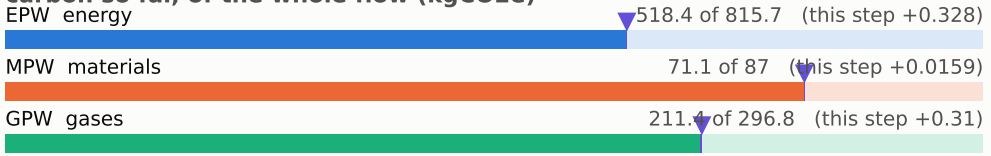

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

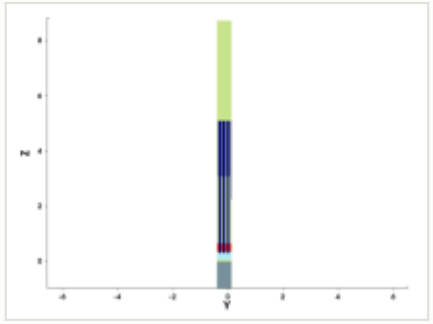

y cut at -0.150 µm

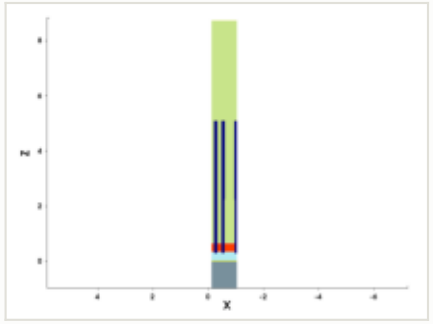

mask for this step

no mask for this step

steps by process area

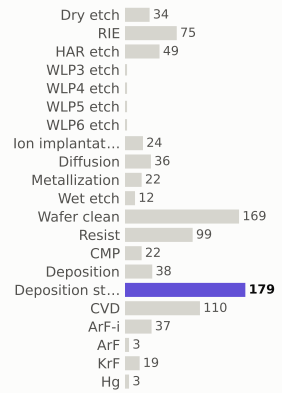

materials deposited (g)

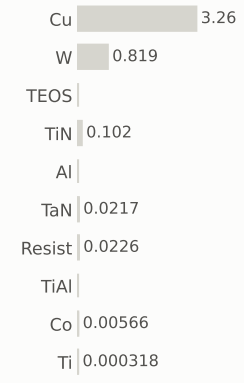

gases emitted (g)

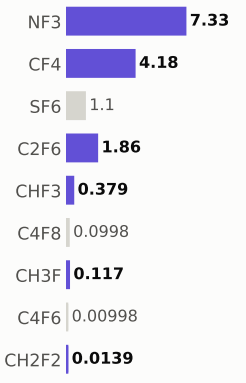

Step #18270: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	801.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

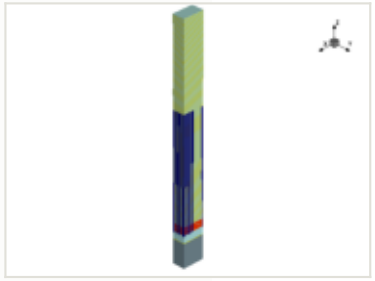

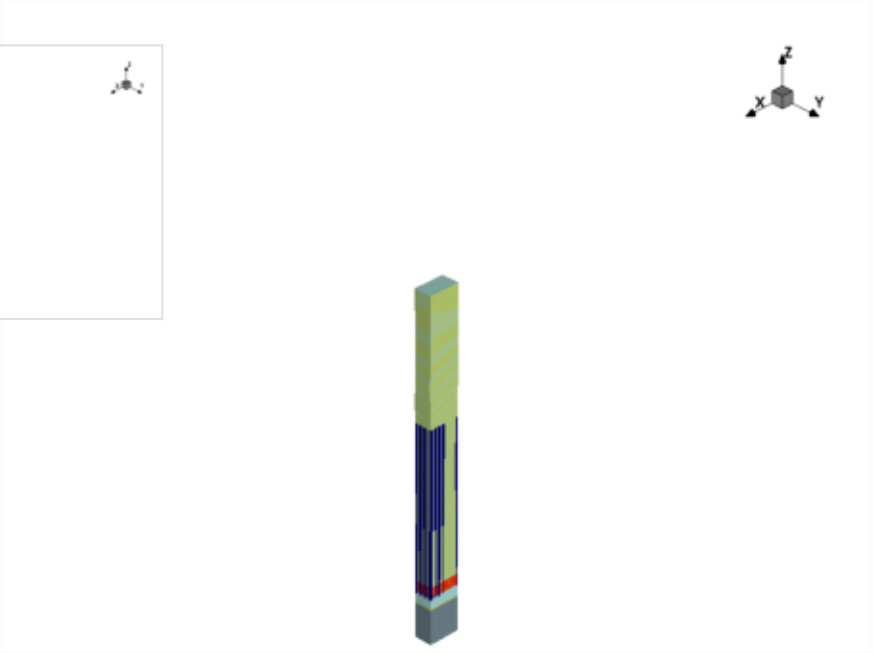

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

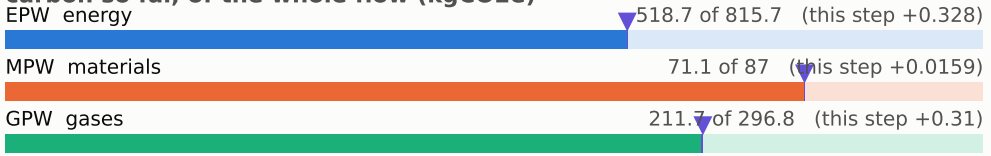

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

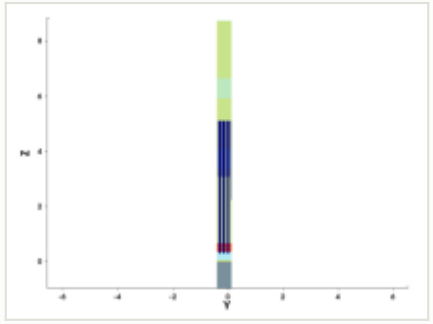

y cut at -0.150 µm

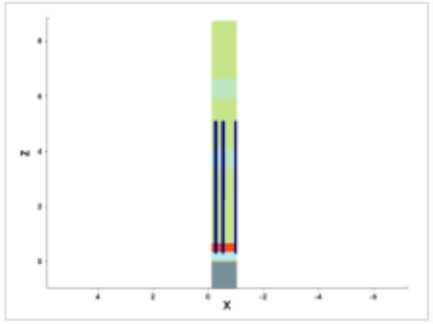

mask for this step

no mask for this step

steps by process area

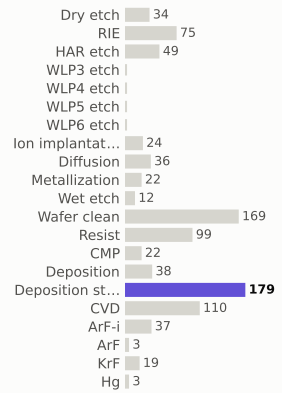

materials deposited (g)

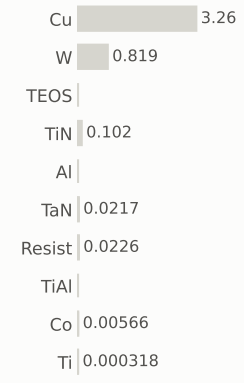

gases emitted (g)

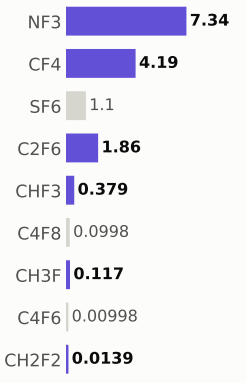

Step #18280: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	802.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

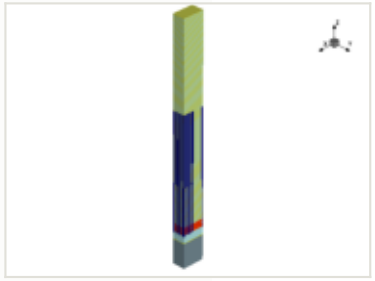

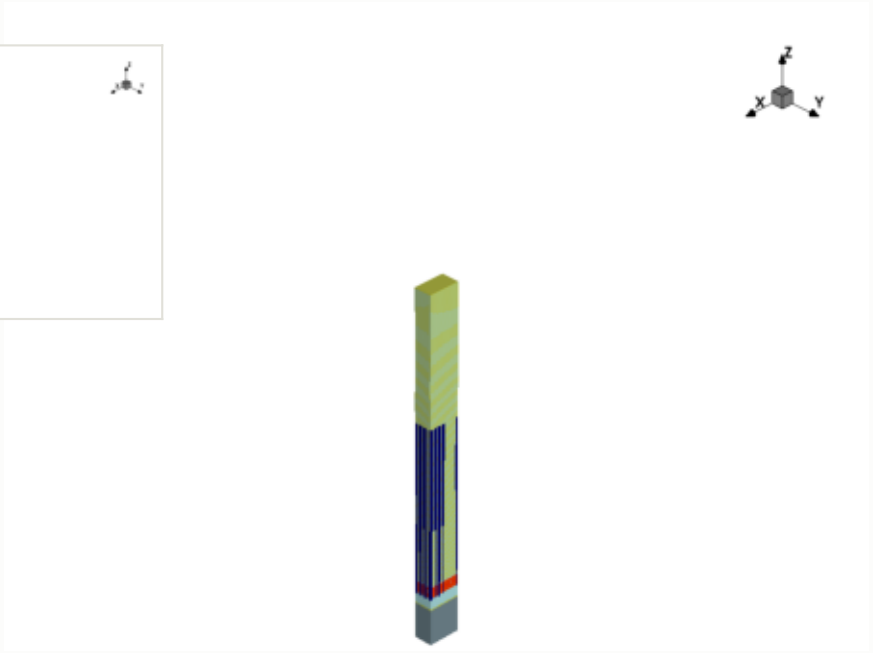

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

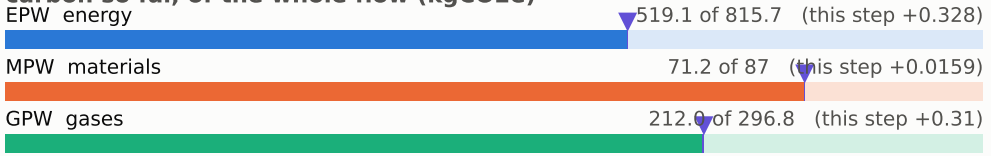

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

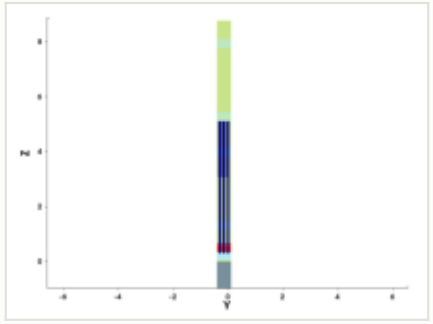

y cut at -0.150 µm

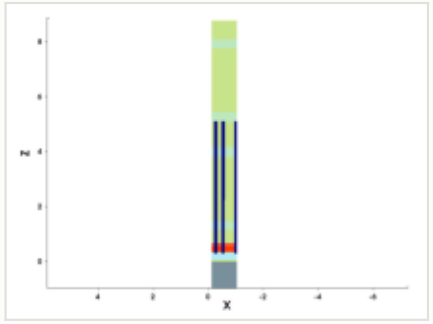

mask for this step

no mask for this step

steps by process area

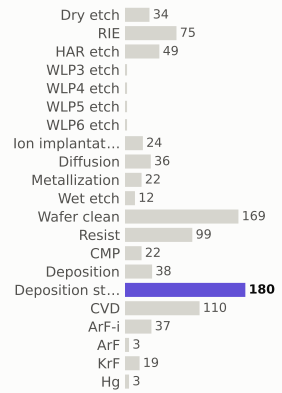

materials deposited (g)

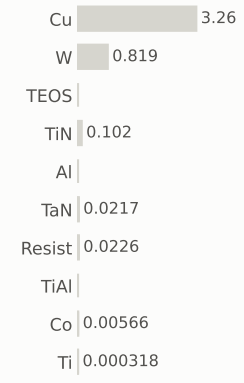

gases emitted (g)

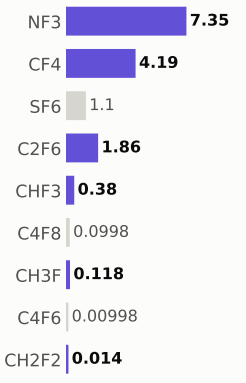

Step #18290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	802.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

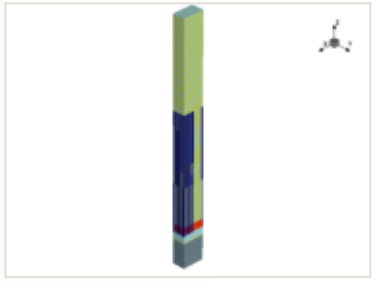

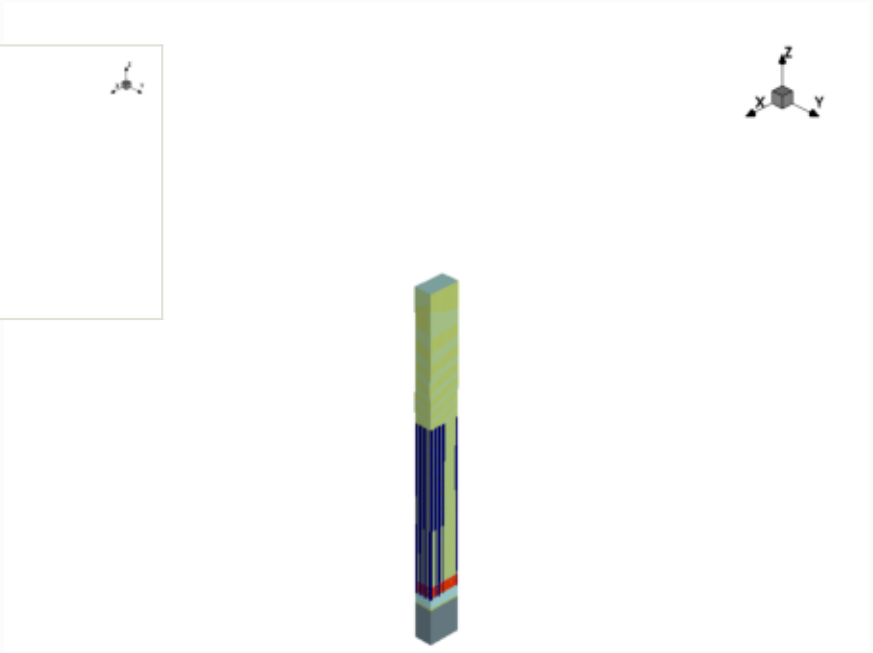

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

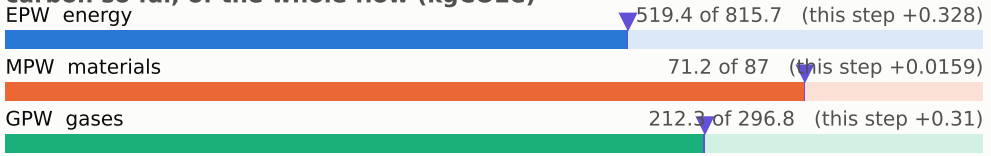

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

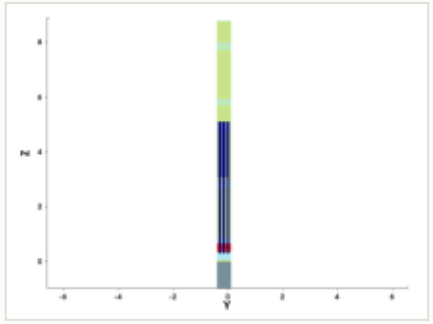

y cut at -0.150 µm

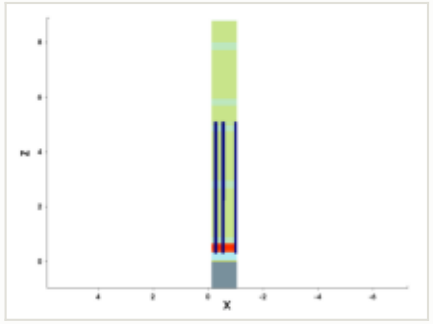

mask for this step

no mask for this step

steps by process area

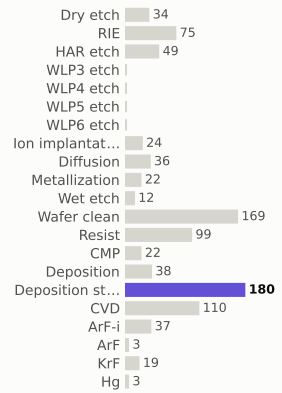

materials deposited (g)

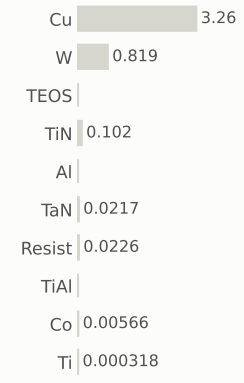

gases emitted (g)

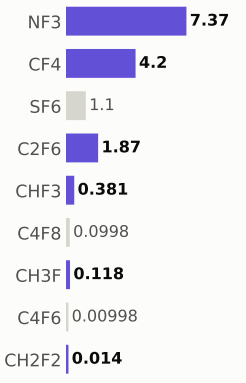

Step #18300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	803.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

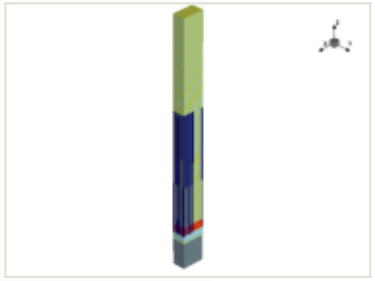

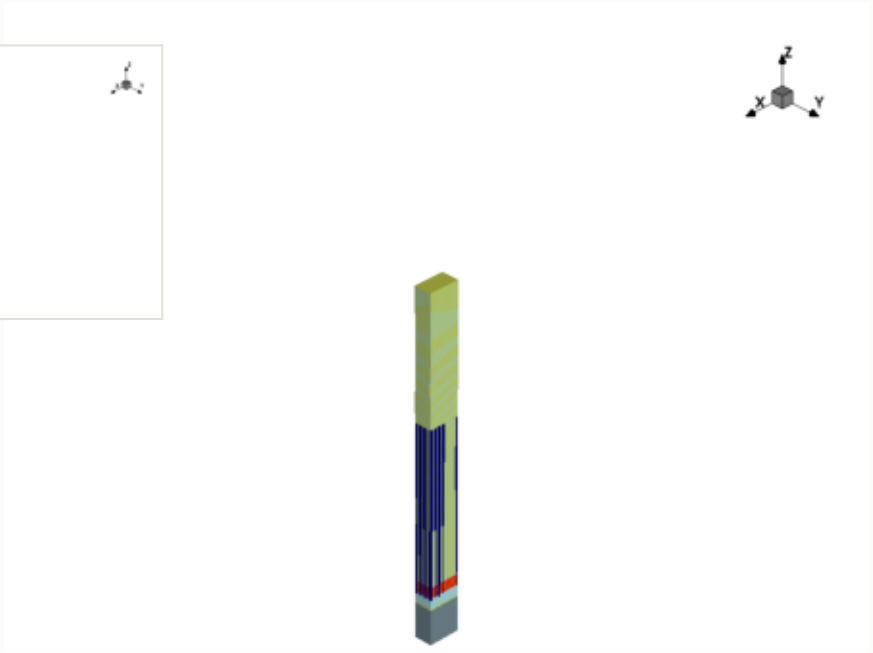

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

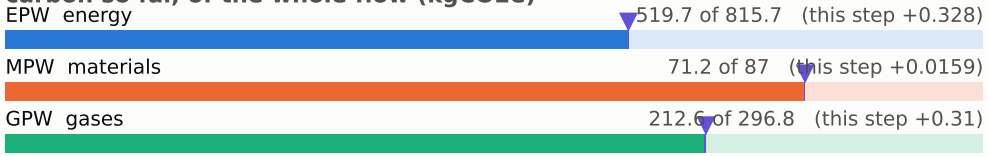

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

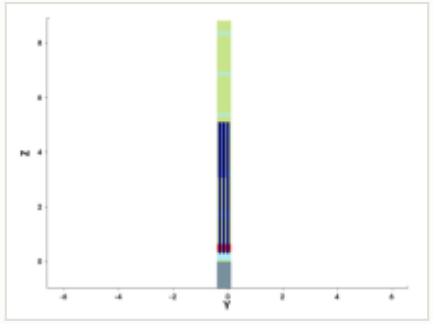

y cut at -0.150 µm

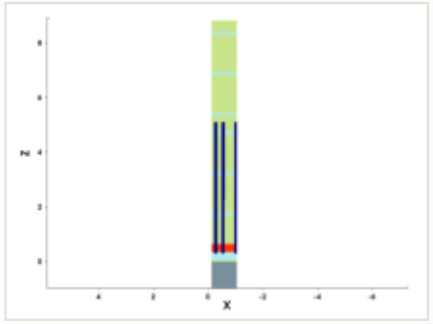

mask for this step

no mask for this step

steps by process area

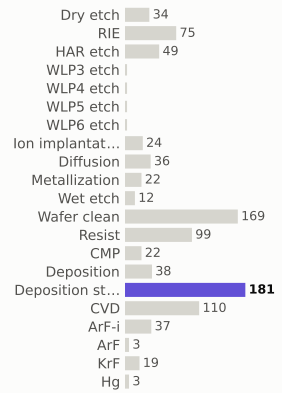

materials deposited (g)

gases emitted (g)

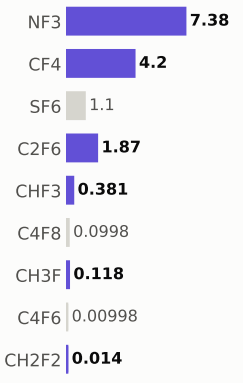

Step #18310: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	804.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

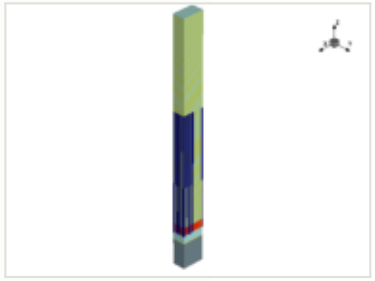

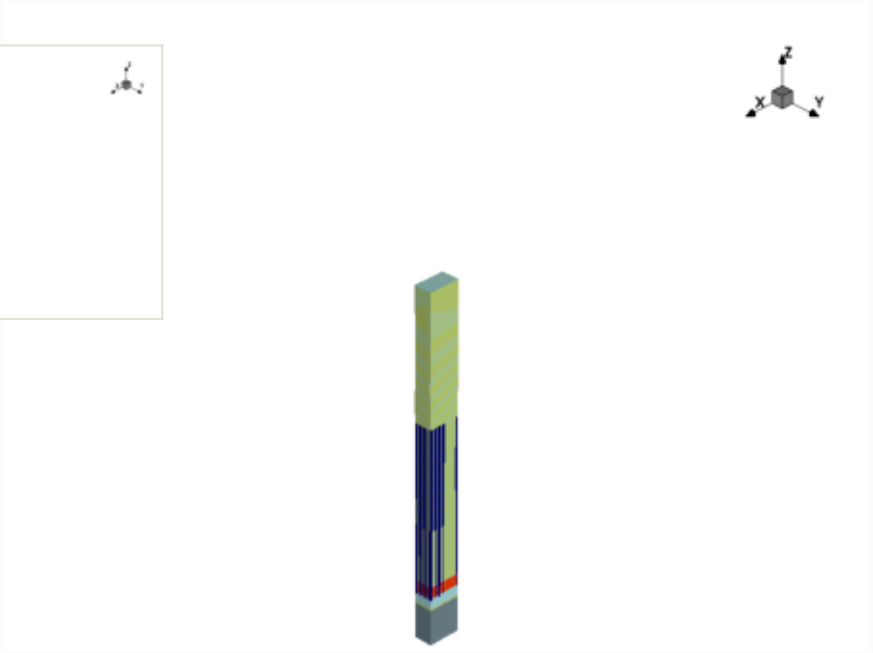

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

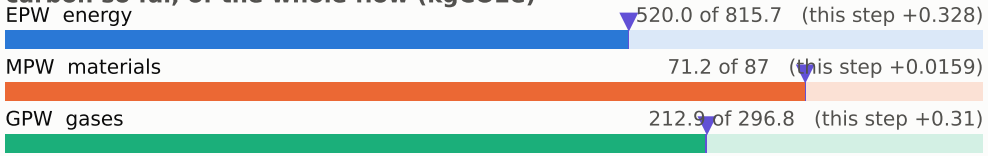

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

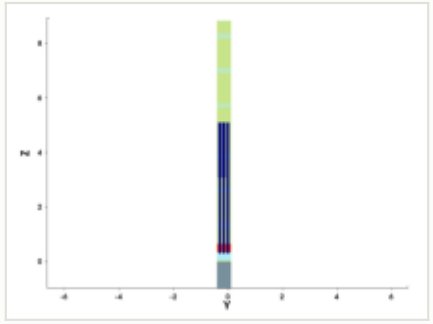

y cut at -0.150 µm

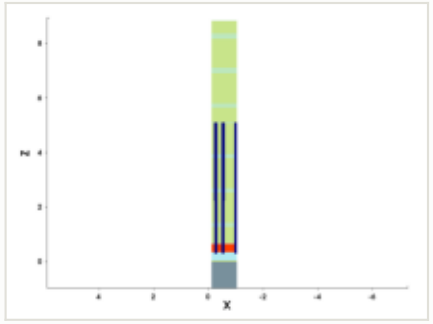

mask for this step

no mask for this step

steps by process area

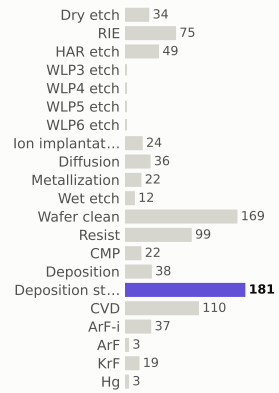

materials deposited (g)

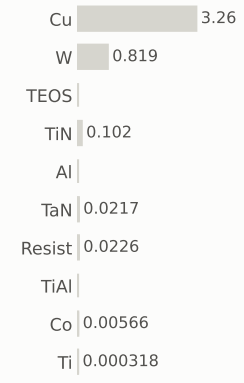

gases emitted (g)

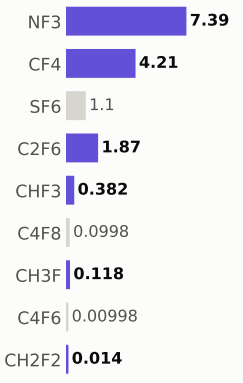

Step #18320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	804.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

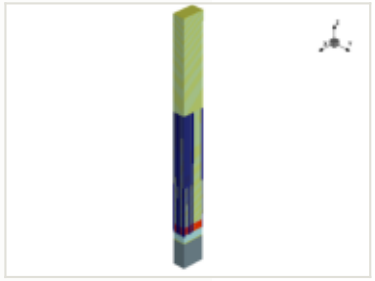

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

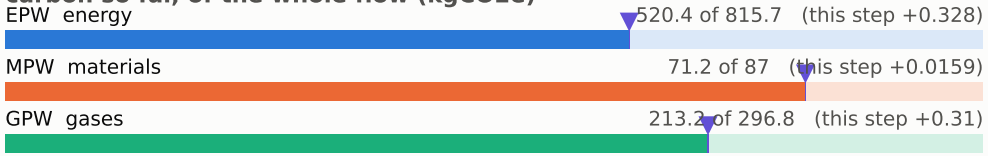

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

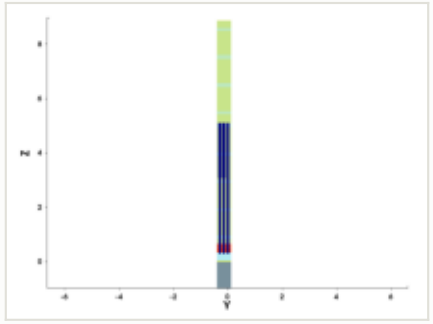

y cut at -0.150 µm

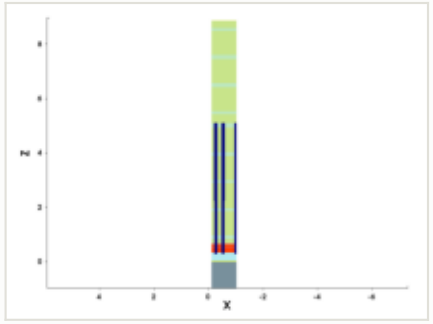

mask for this step

no mask for this step

steps by process area

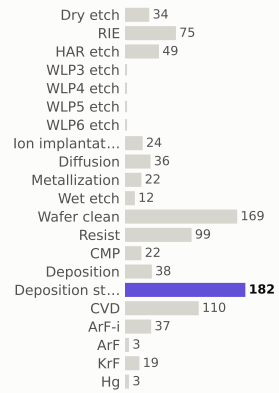

materials deposited (g)

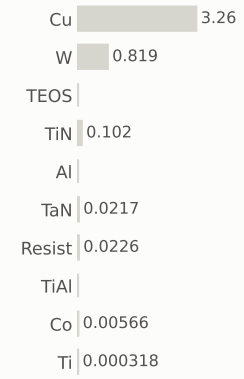

gases emitted (g)

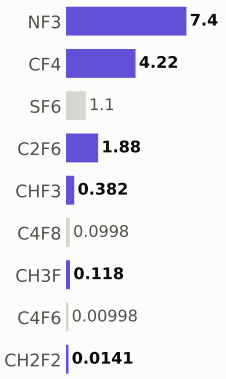

Step #18330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	805.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

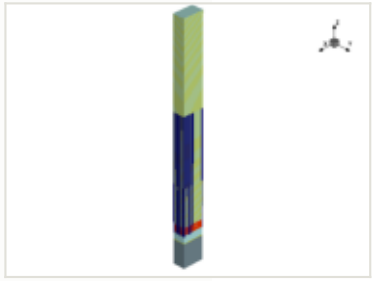

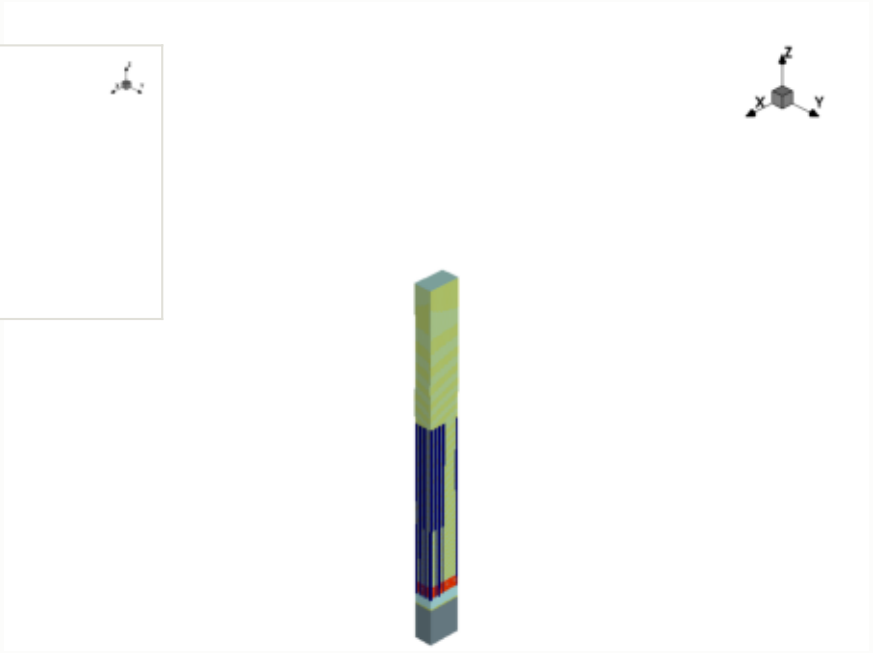

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

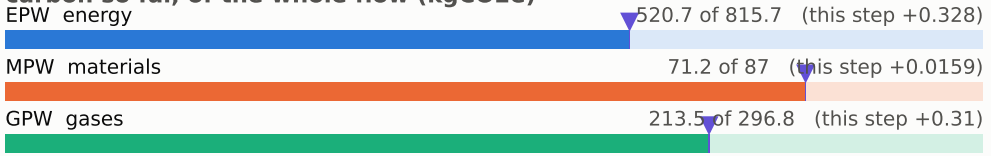

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

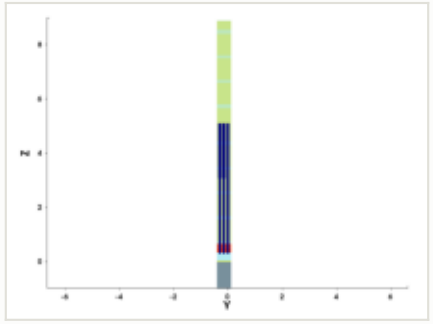

y cut at -0.150 µm

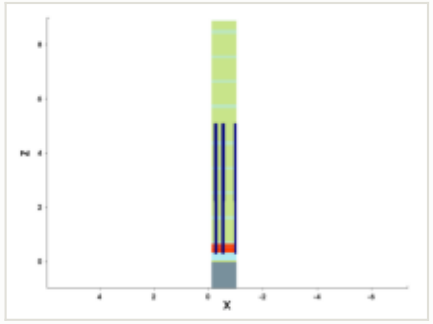

mask for this step

no mask for this step

steps by process area

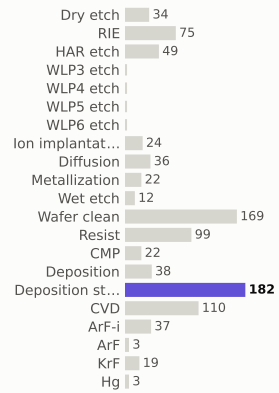

materials deposited (g)

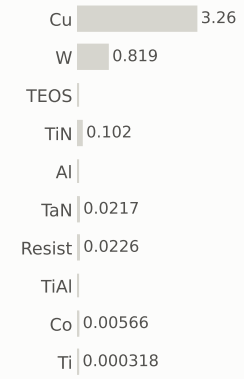

gases emitted (g)

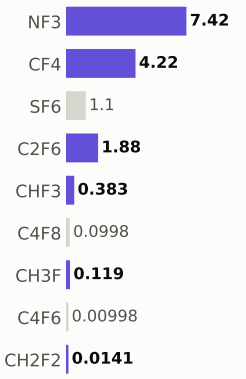

Step #18340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	806.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

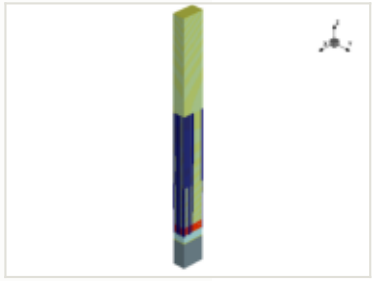

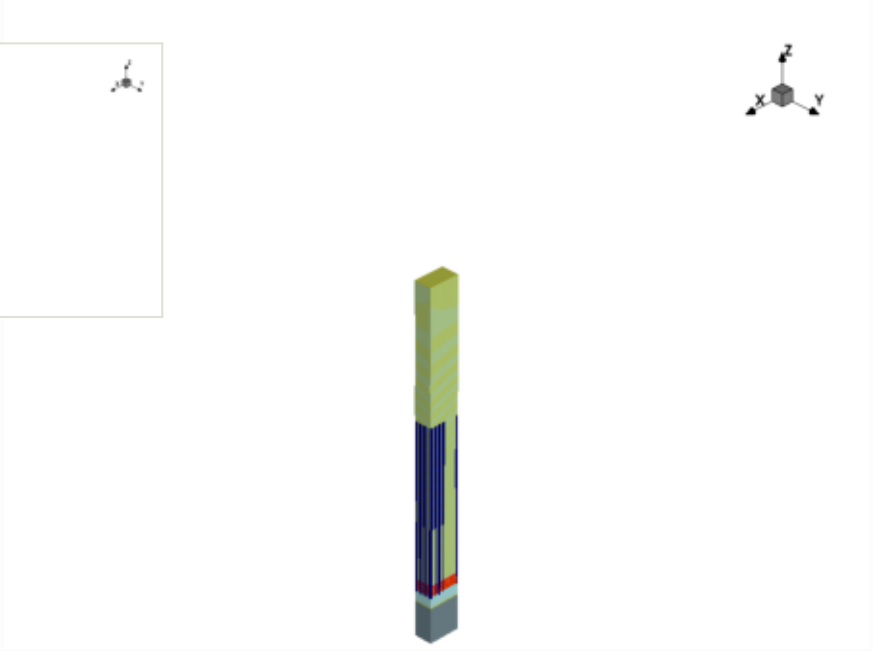

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

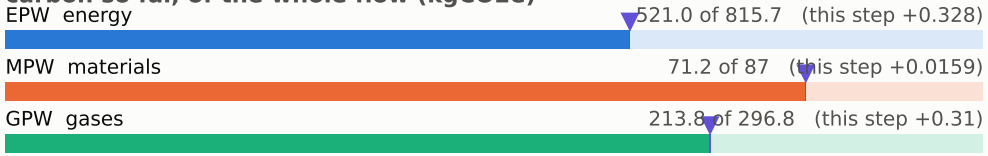

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

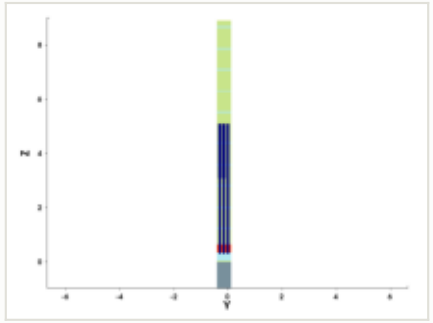

y cut at -0.150 µm

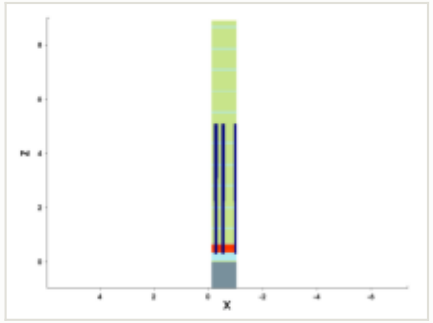

mask for this step

no mask for this step

steps by process area

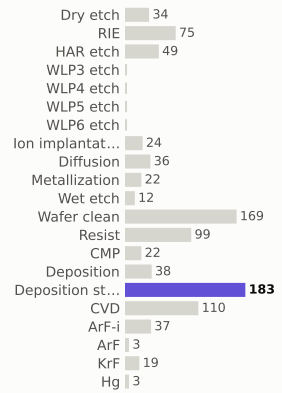

materials deposited (g)

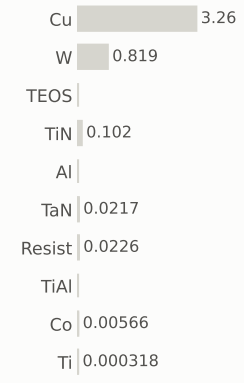

gases emitted (g)

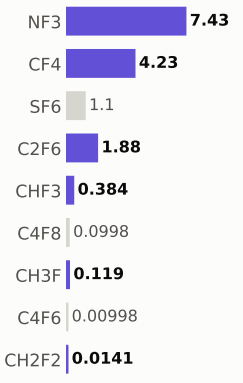

Step #18350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	806.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

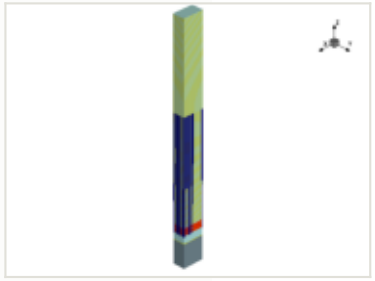

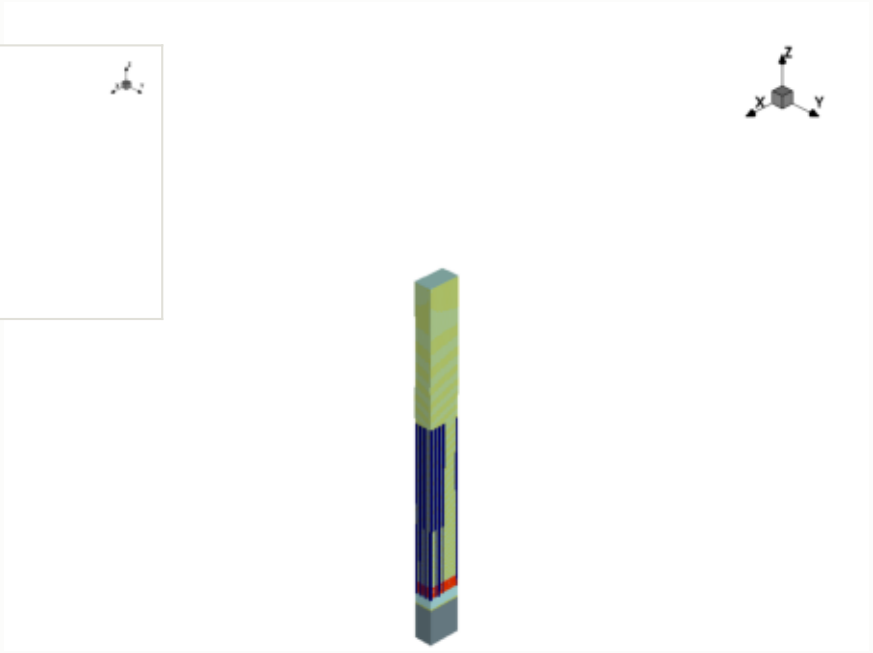

x cut at -0.570 µm

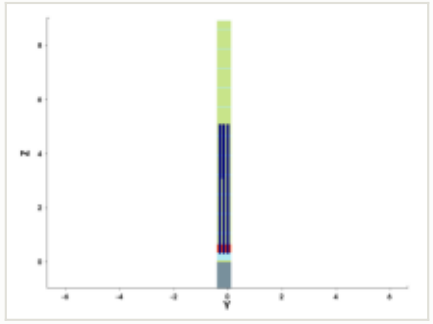

y cut at -0.150 µm

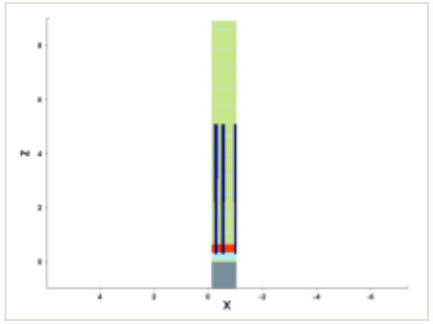

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

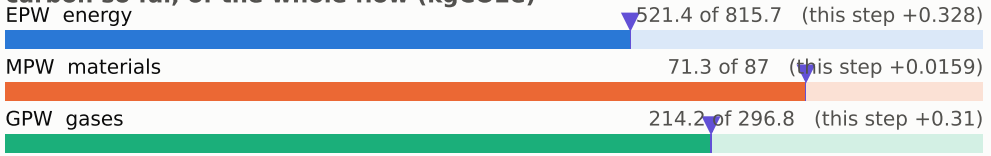

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

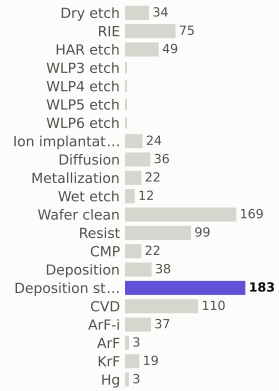

materials deposited (g)

gases emitted (g)

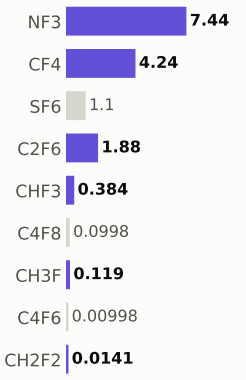

Step #18360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	807.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

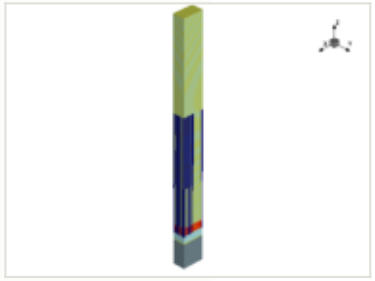

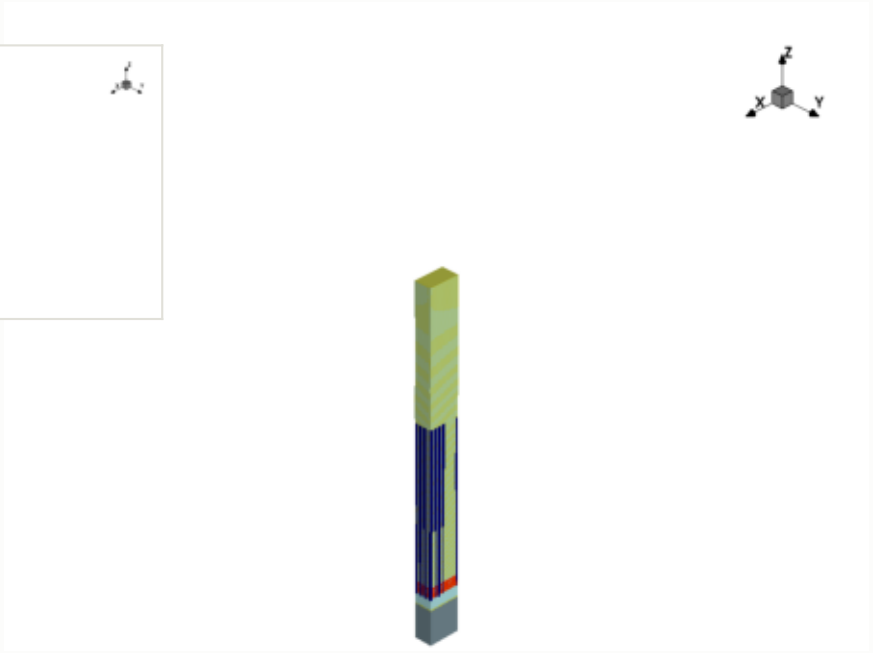

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

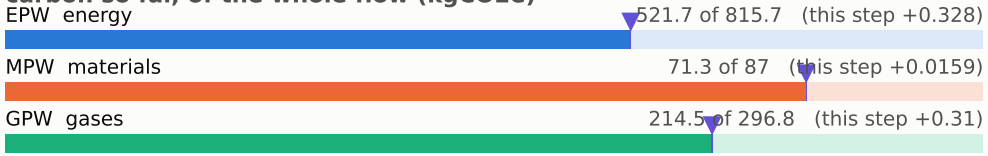

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

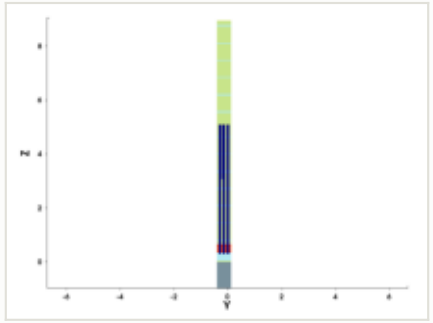

y cut at -0.150 µm

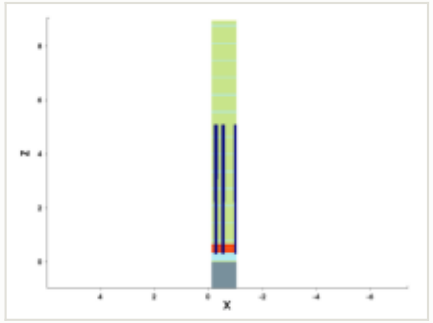

mask for this step

no mask for this step

steps by process area

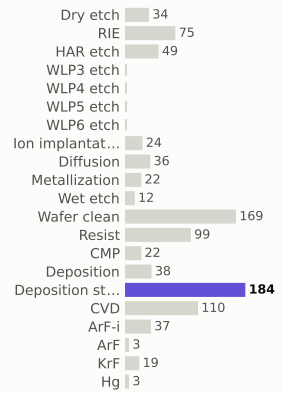

materials deposited (g)

gases emitted (g)

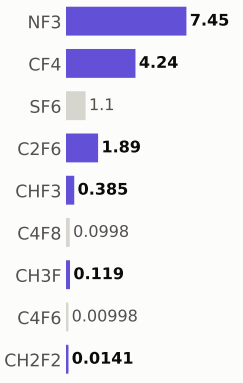

Step #18370: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	808.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

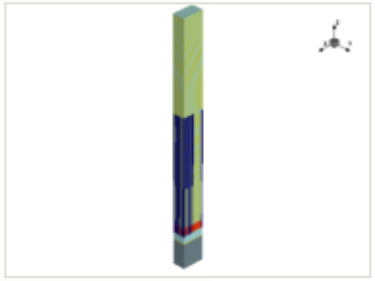

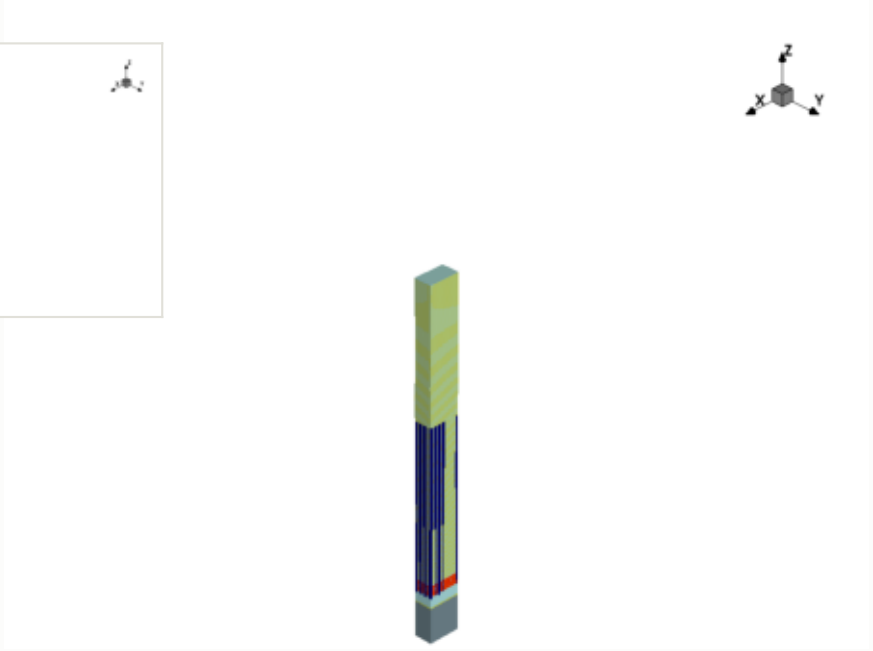

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

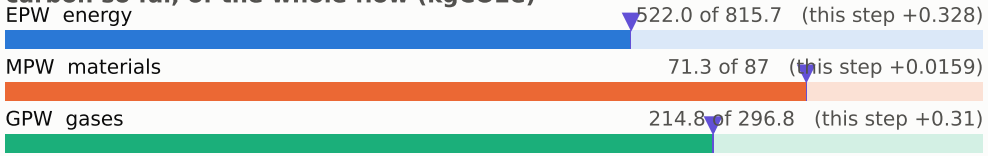

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

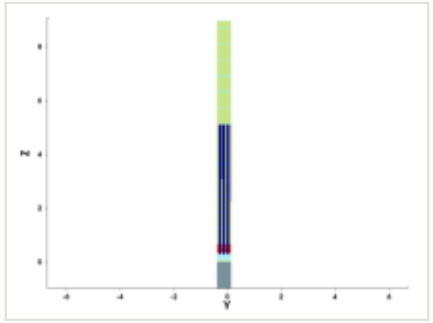

y cut at -0.150 µm

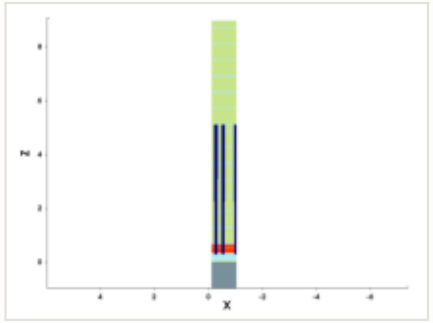

mask for this step

no mask for this step

steps by process area

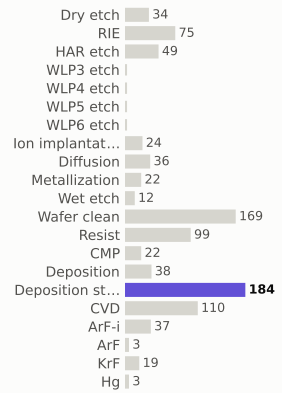

materials deposited (g)

gases emitted (g)

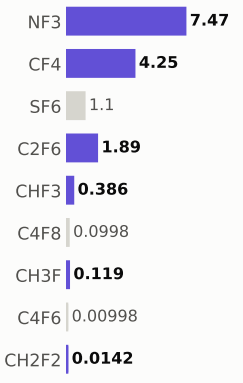

Step #18380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	808.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

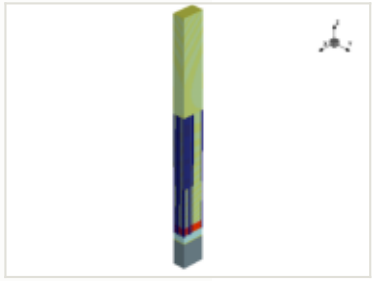

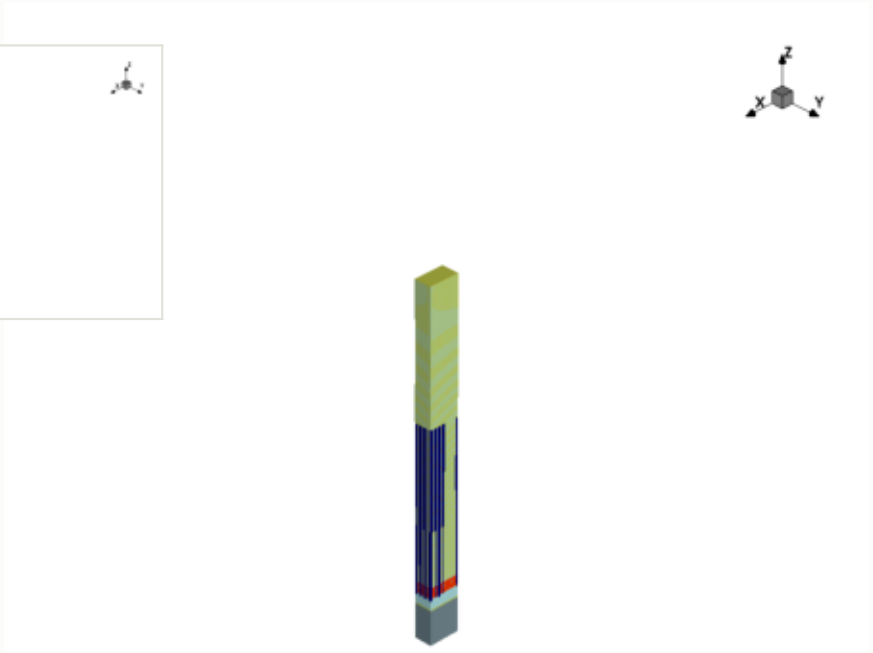

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

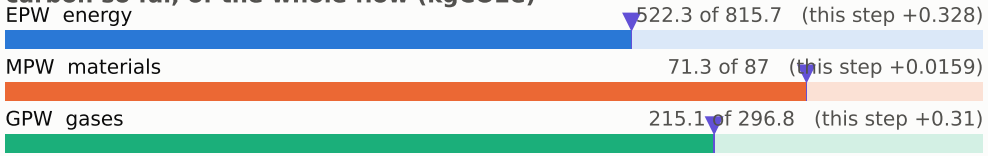

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

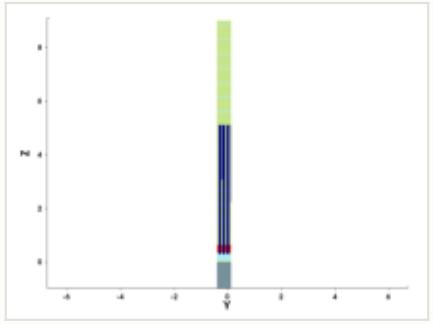

y cut at -0.150 µm

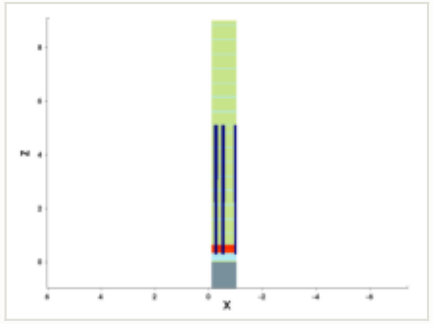

mask for this step

no mask for this step

steps by process area

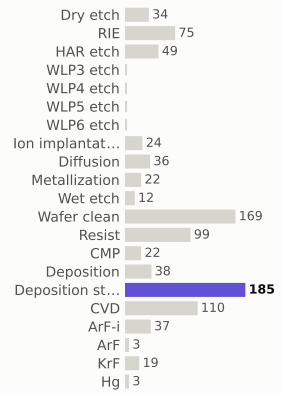

materials deposited (g)

gases emitted (g)

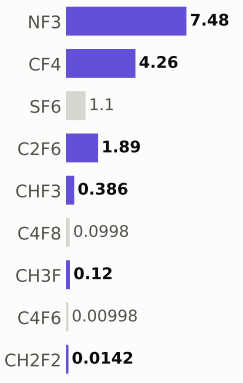

Step #18390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	809.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

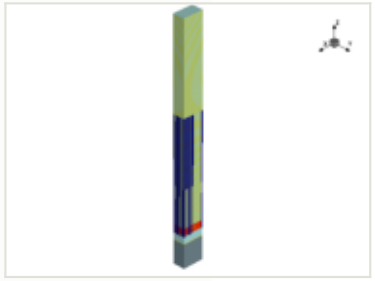

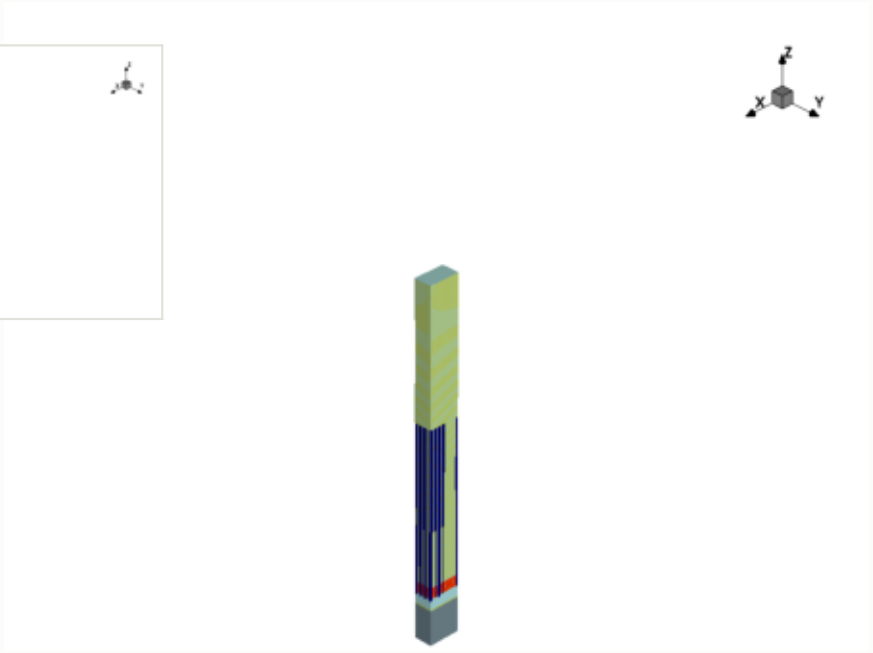

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

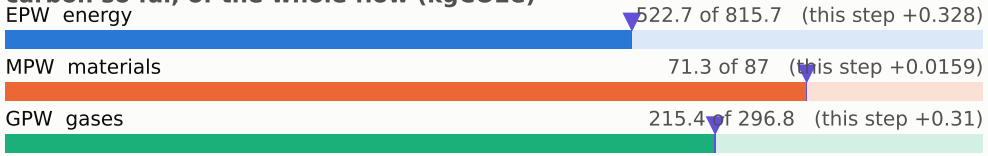

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

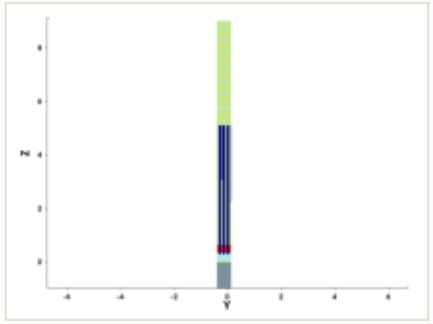

y cut at -0.150 µm

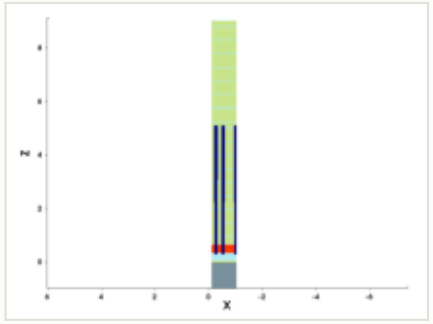

mask for this step

no mask for this step

steps by process area

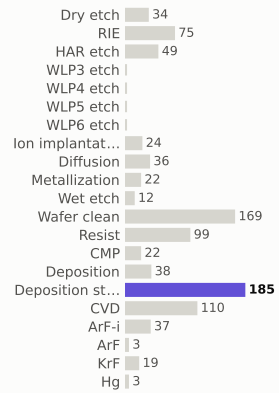

materials deposited (g)

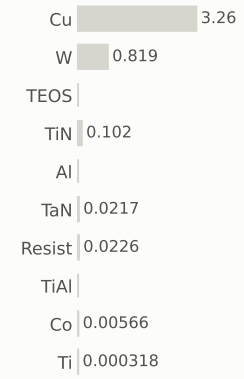

gases emitted (g)

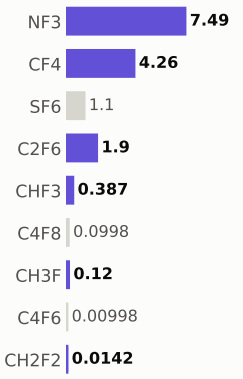

Step #18400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	810.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

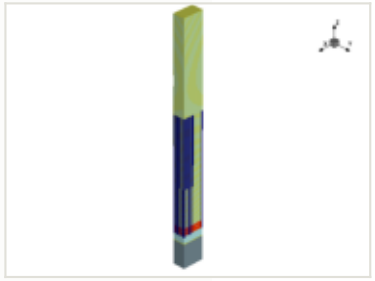

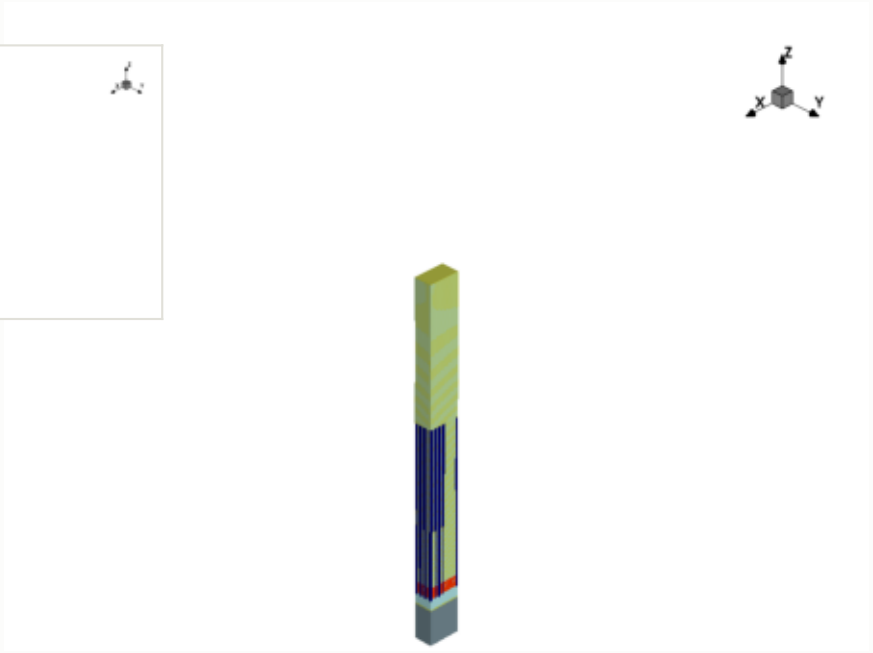

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

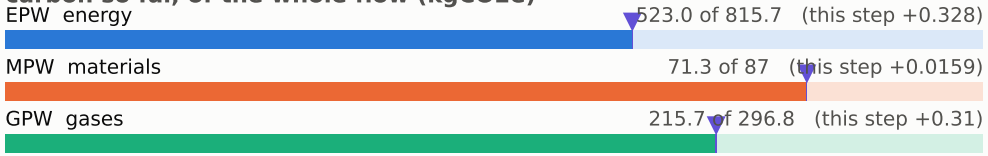

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

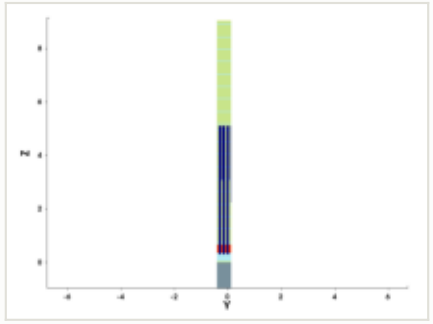

y cut at -0.150 µm

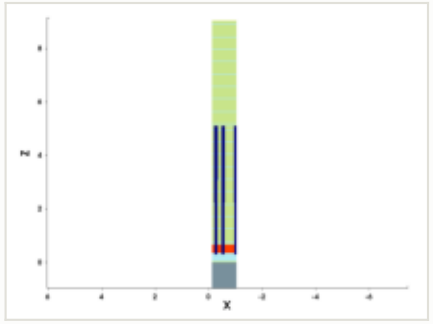

mask for this step

no mask for this step

steps by process area

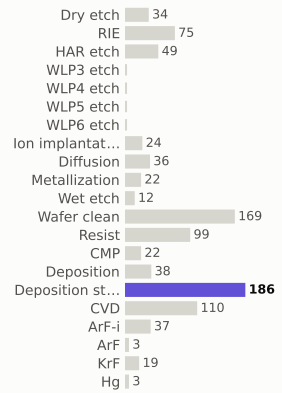

materials deposited (g)

gases emitted (g)

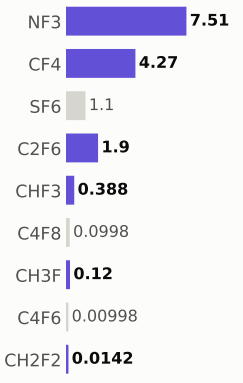

Step #18410: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	810.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

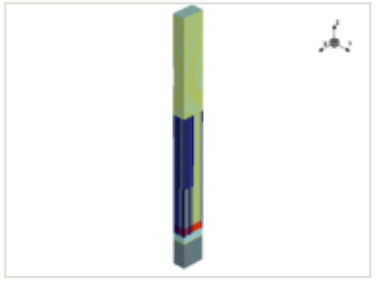

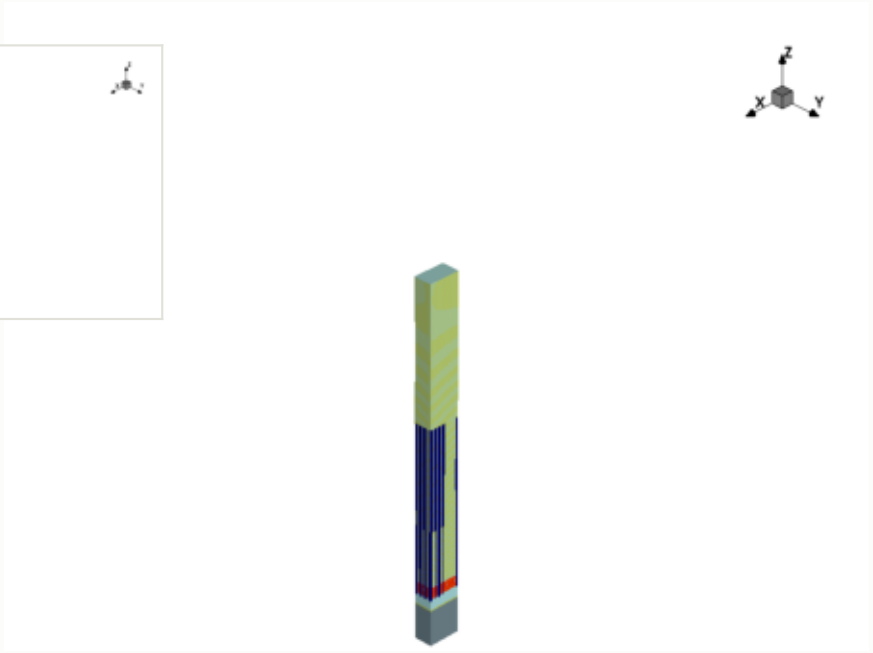

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

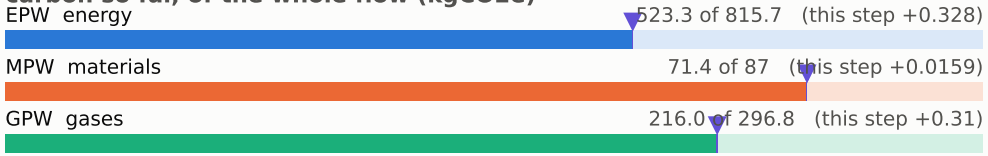

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

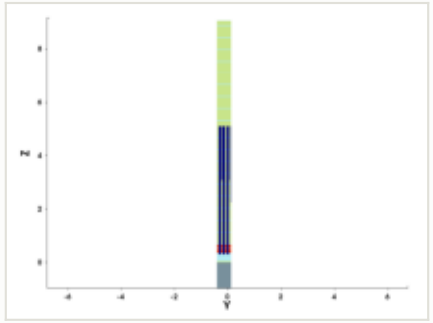

y cut at -0.150 µm

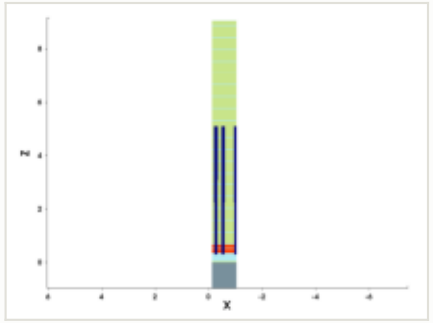

mask for this step

no mask for this step

steps by process area

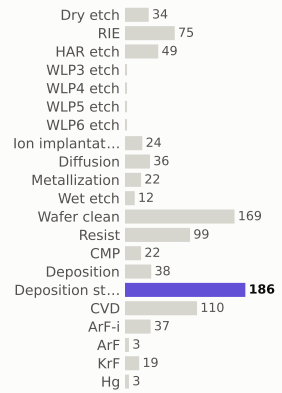

materials deposited (g)

gases emitted (g)

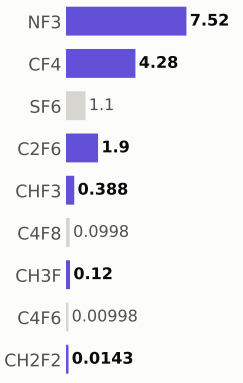

Step #18420: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	811.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

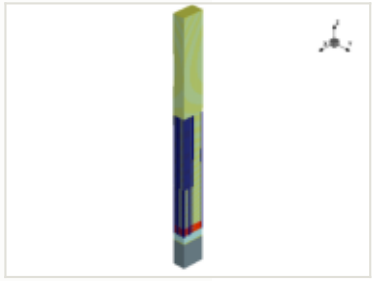

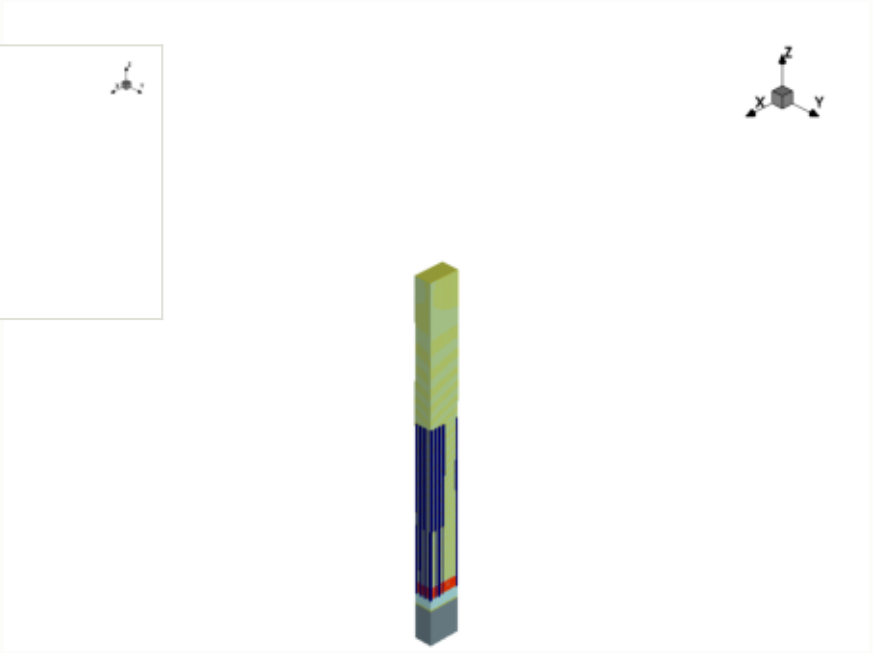

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

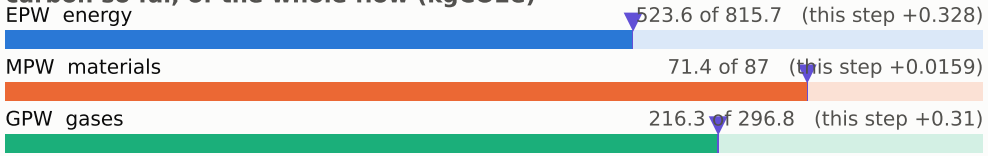

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

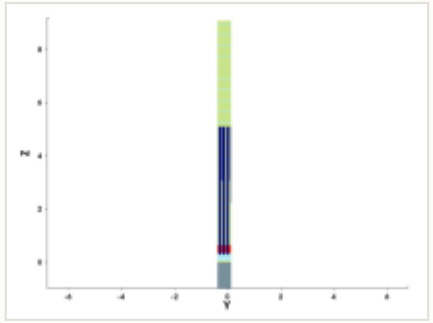

y cut at -0.150 µm

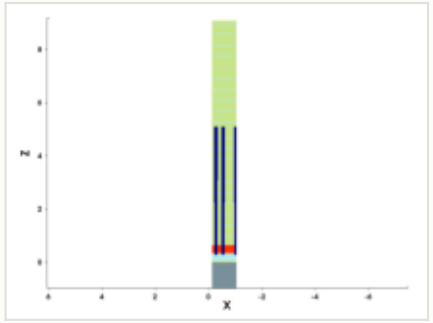

mask for this step

no mask for this step

steps by process area

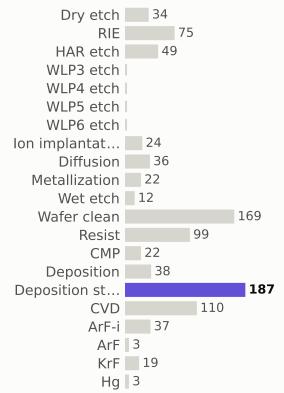

materials deposited (g)

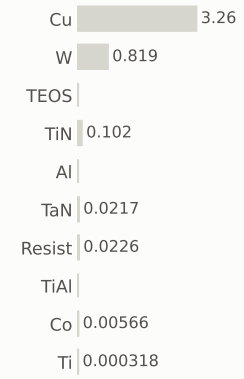

gases emitted (g)

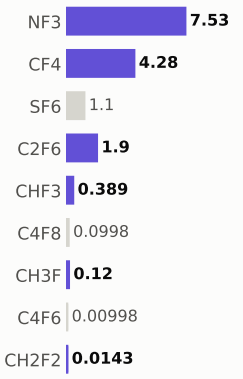

Step #18430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	812.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

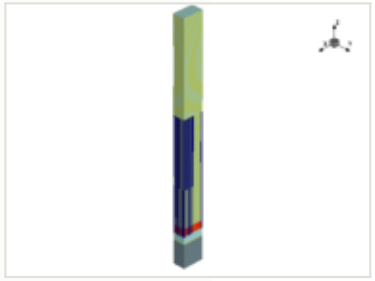

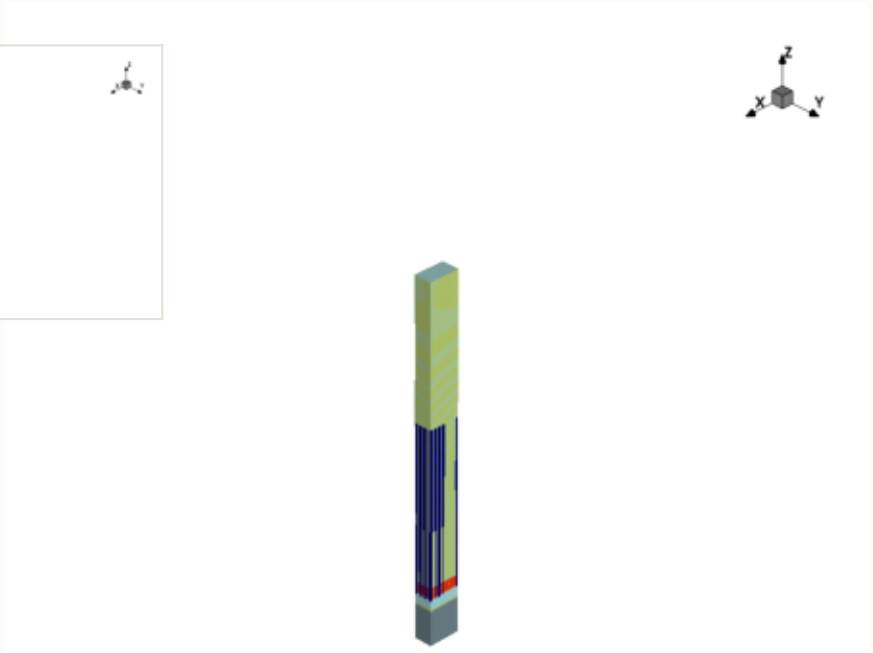

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

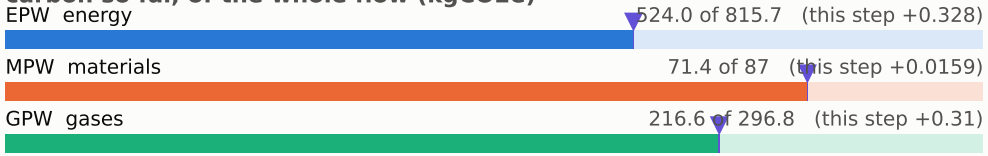

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

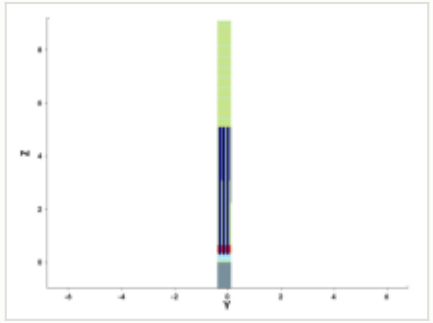

y cut at -0.150 µm

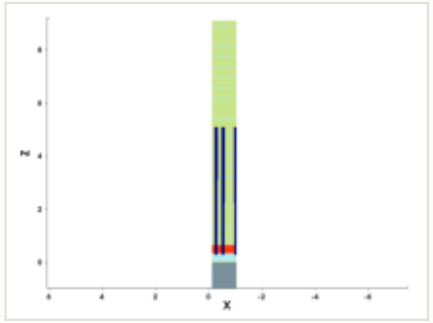

mask for this step

no mask for this step

steps by process area

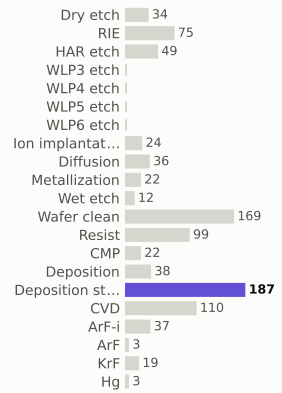

materials deposited (g)

gases emitted (g)

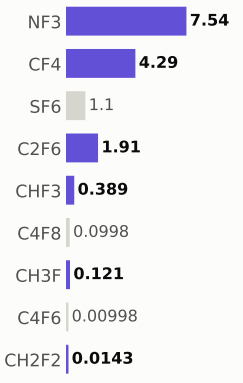

Step #18440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	812.7	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

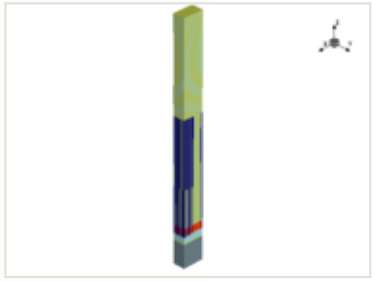

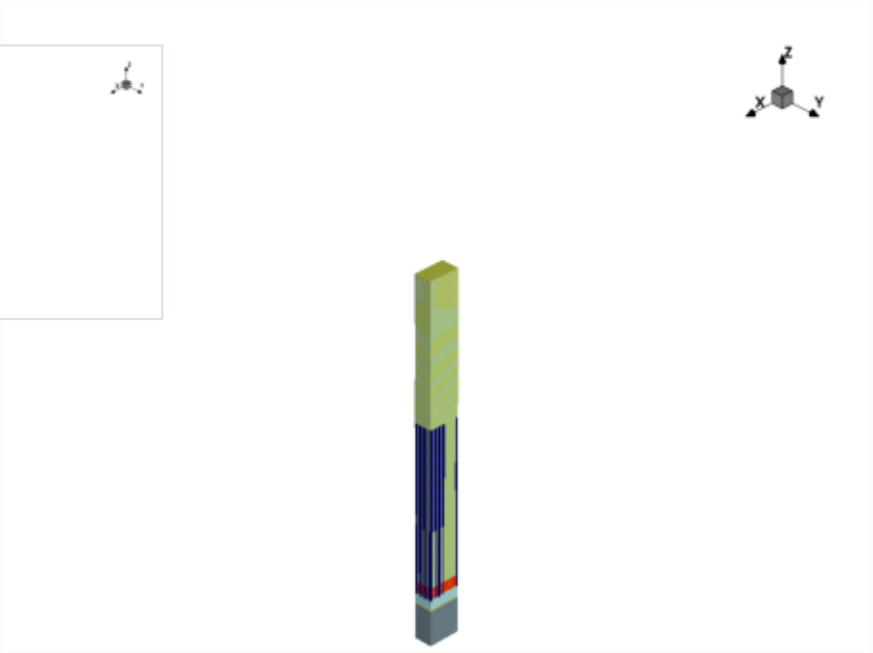

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

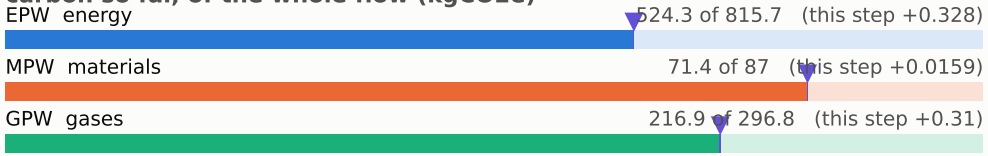

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

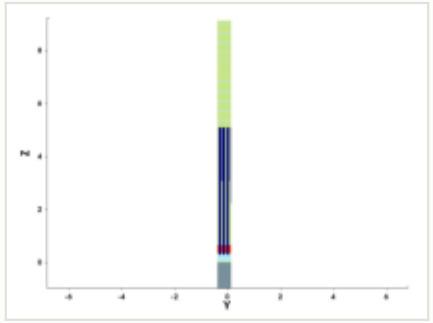

y cut at -0.150 µm

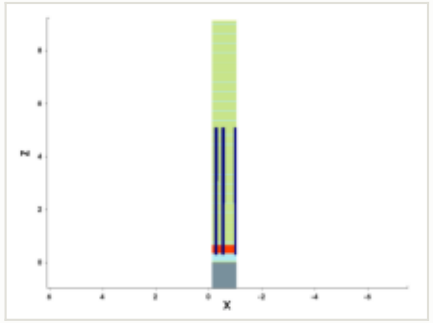

mask for this step

no mask for this step

steps by process area

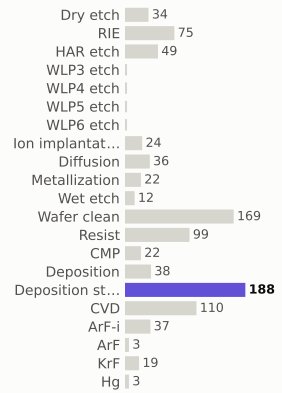

materials deposited (g)

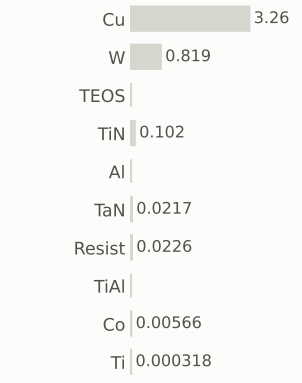

gases emitted (g)

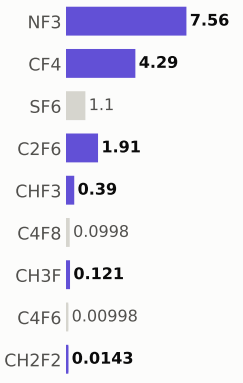

Step #18450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	813.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

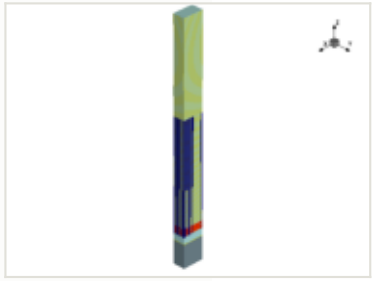

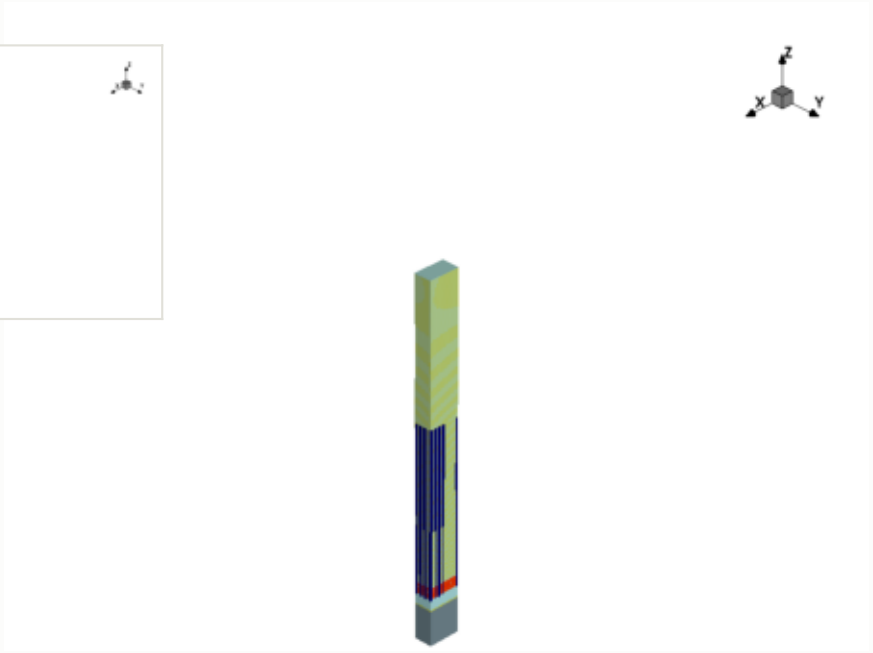

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

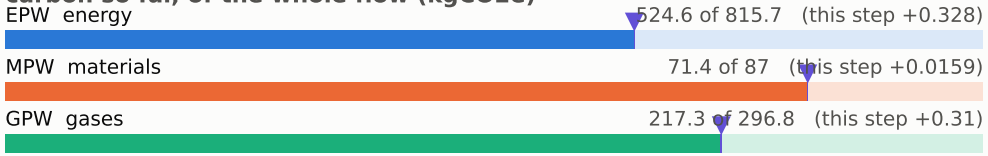

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

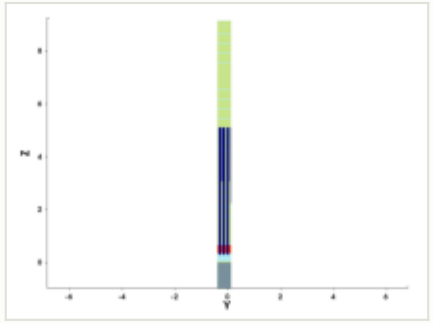

y cut at -0.150 µm

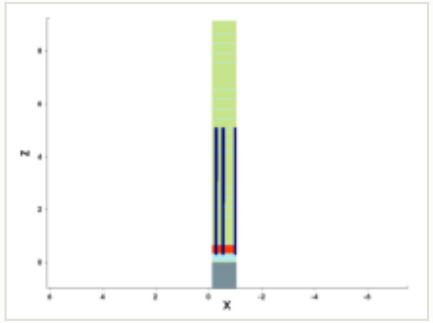

mask for this step

no mask for this step

steps by process area

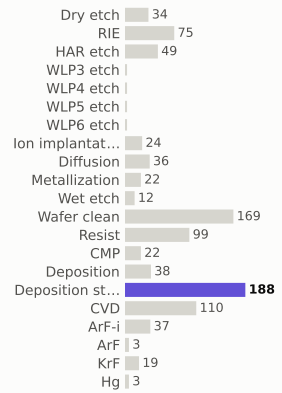

materials deposited (g)

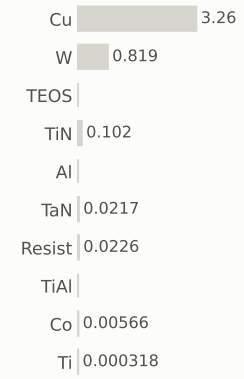

gases emitted (g)

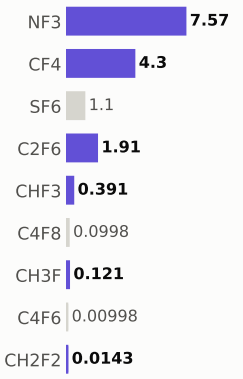

Step #18460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	814.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

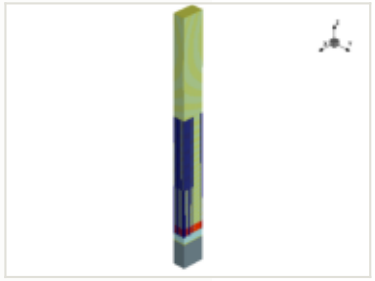

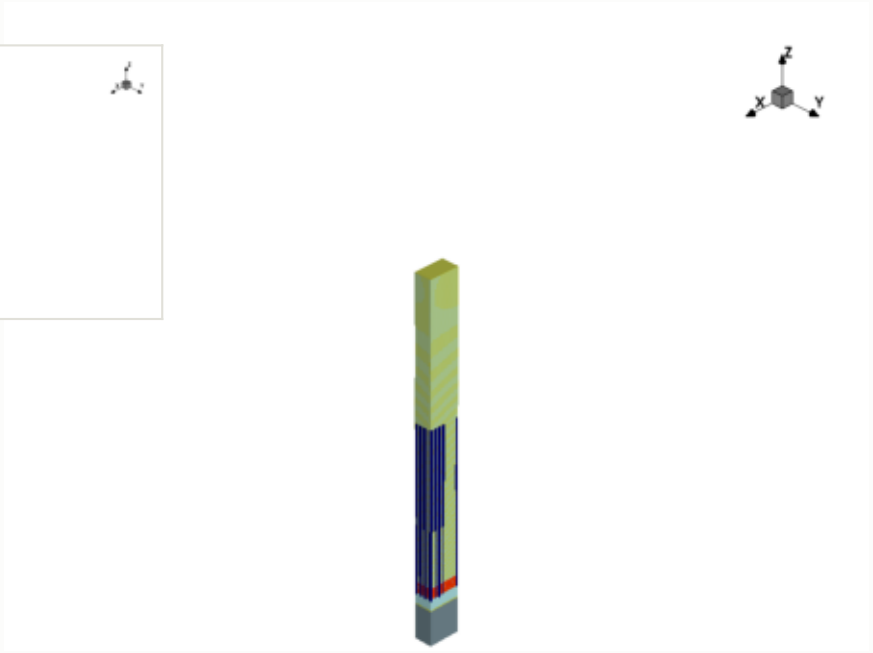

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

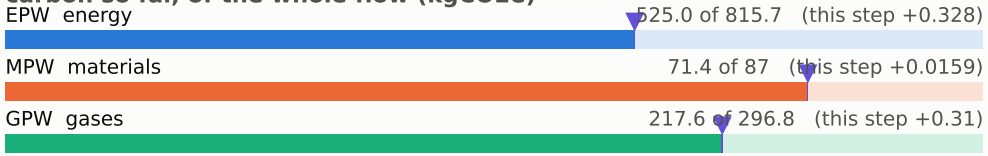

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

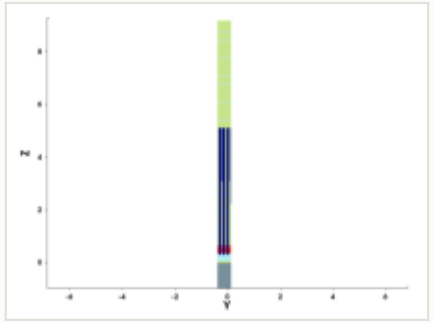

y cut at -0.150 µm

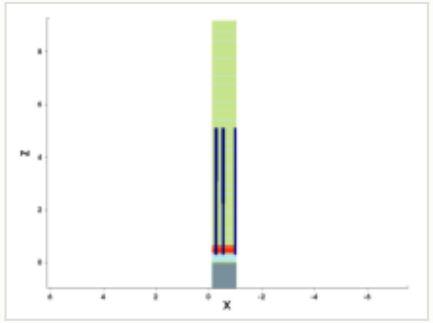

mask for this step

no mask for this step

steps by process area

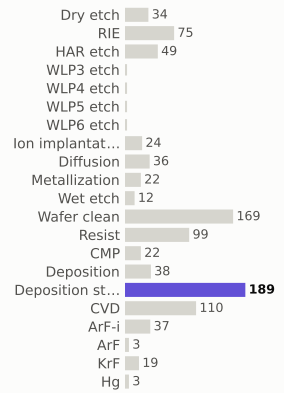

materials deposited (g)

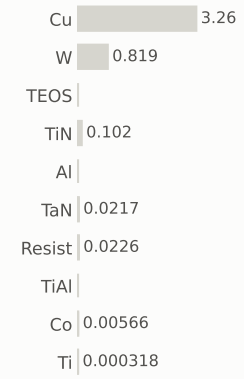

gases emitted (g)

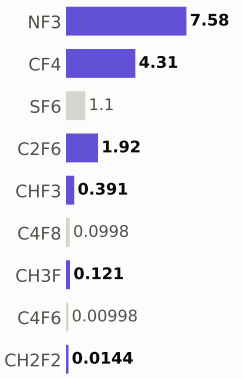

Step #18470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	814.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

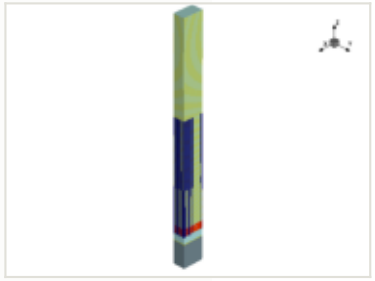

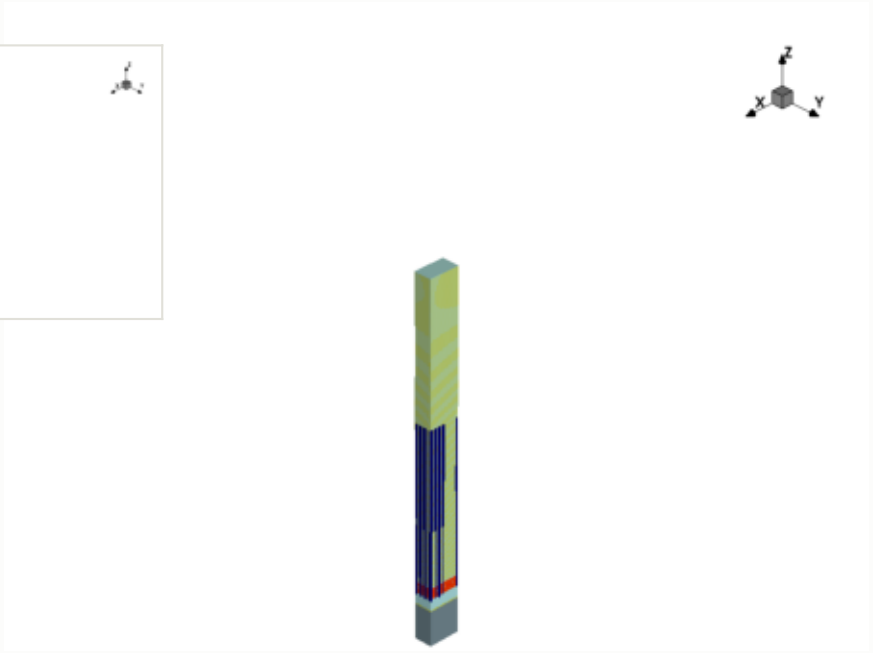

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

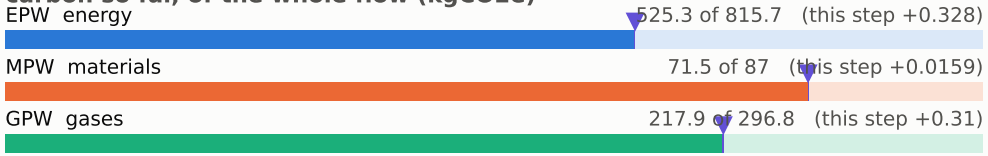

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

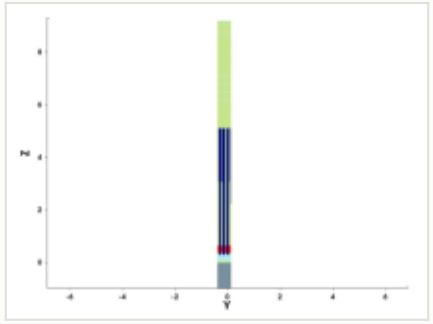

y cut at -0.150 µm

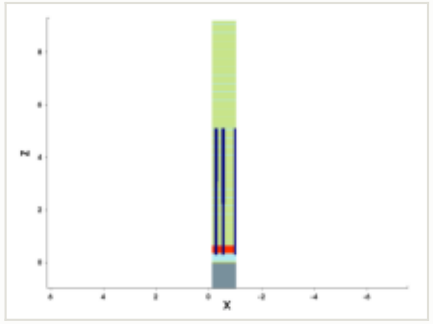

mask for this step

no mask for this step

steps by process area

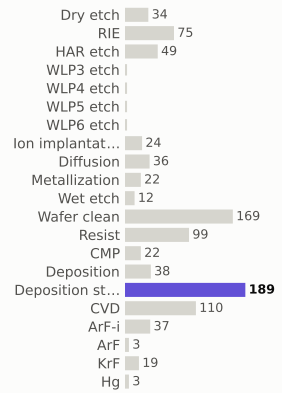

materials deposited (g)

gases emitted (g)

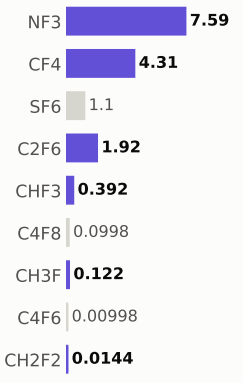

Step #18480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	815.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

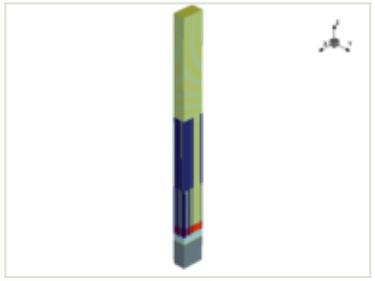

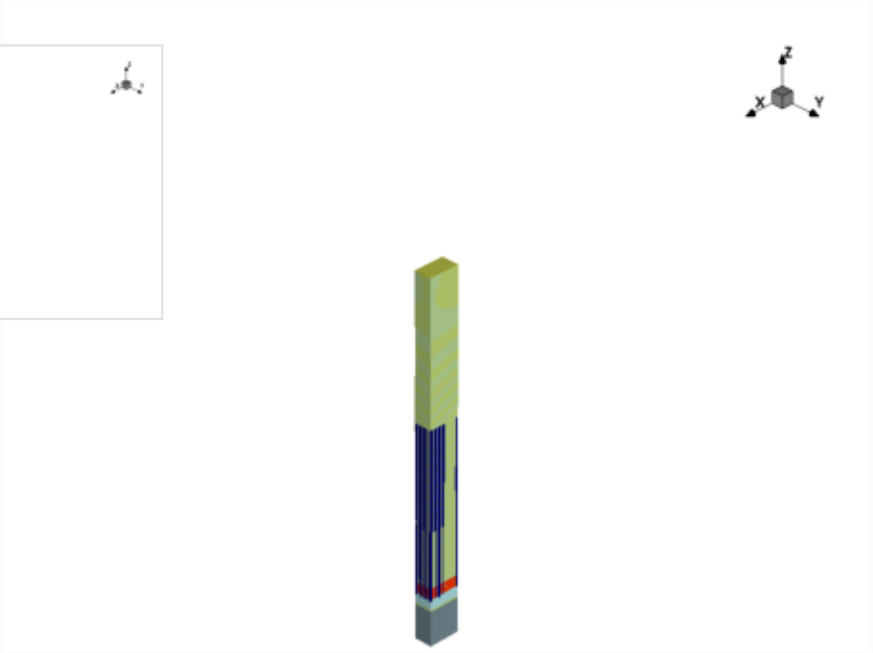

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

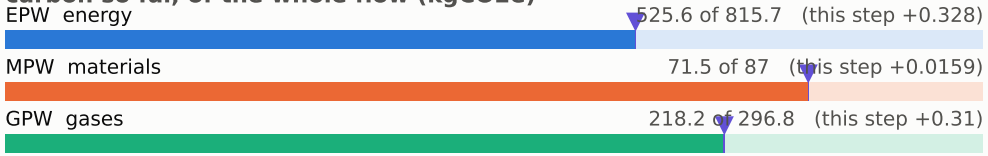

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

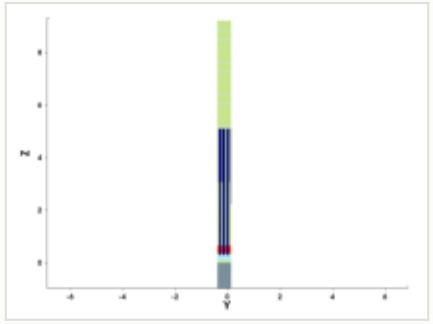

y cut at -0.150 µm

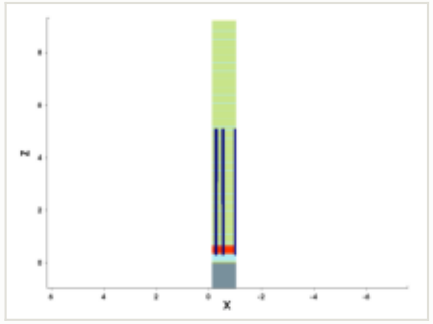

mask for this step

no mask for this step

steps by process area

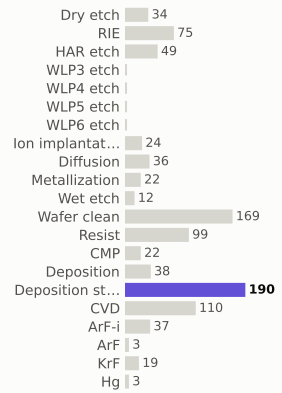

materials deposited (g)

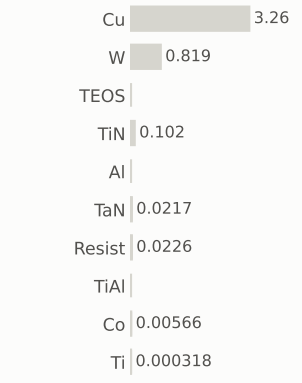

gases emitted (g)

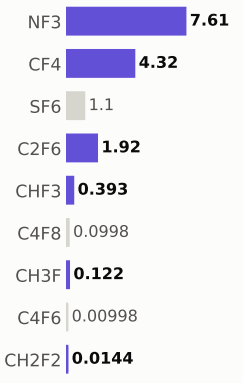

Step #18490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	815.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

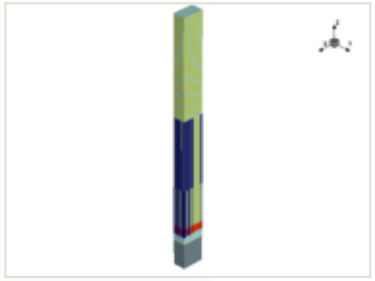

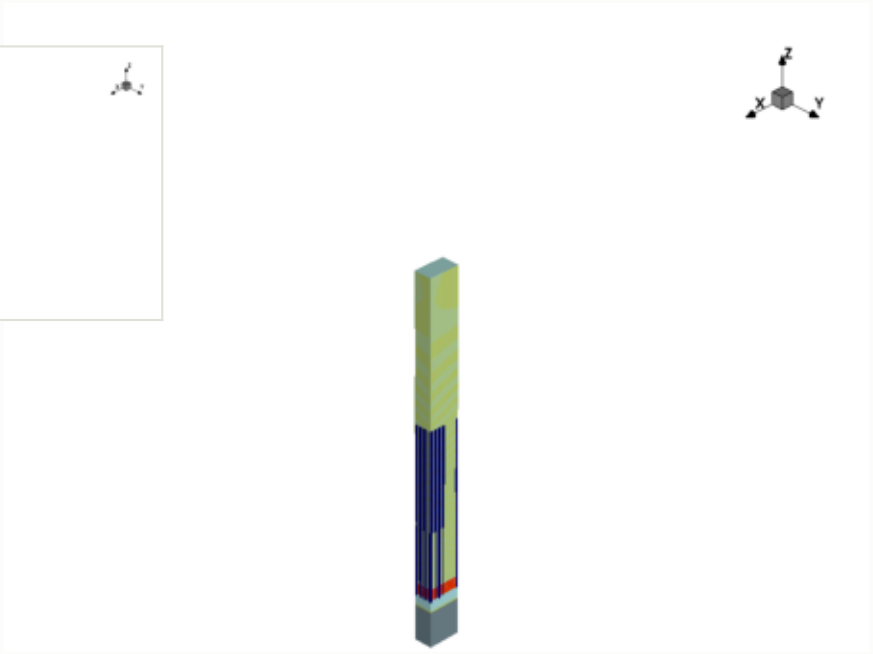

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

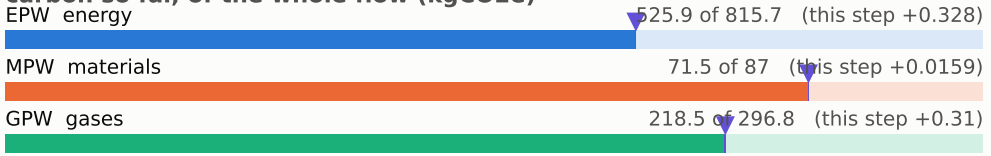

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

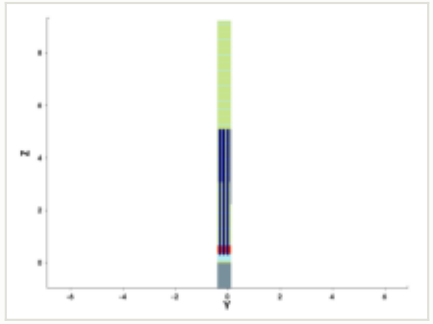

y cut at -0.150 µm

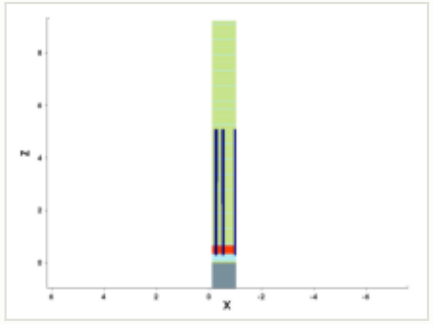

mask for this step

no mask for this step

steps by process area

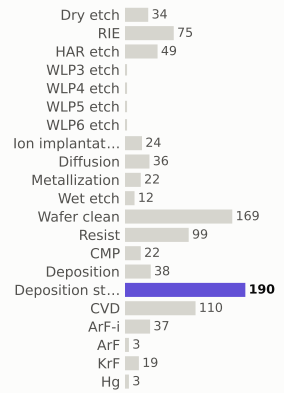

materials deposited (g)

gases emitted (g)

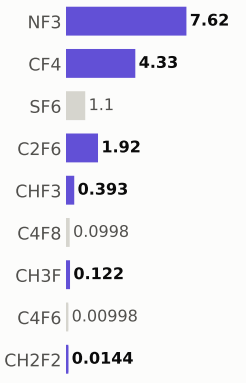

Step #18500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	816.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

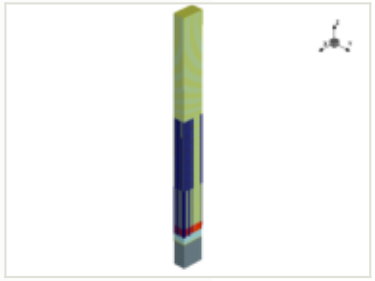

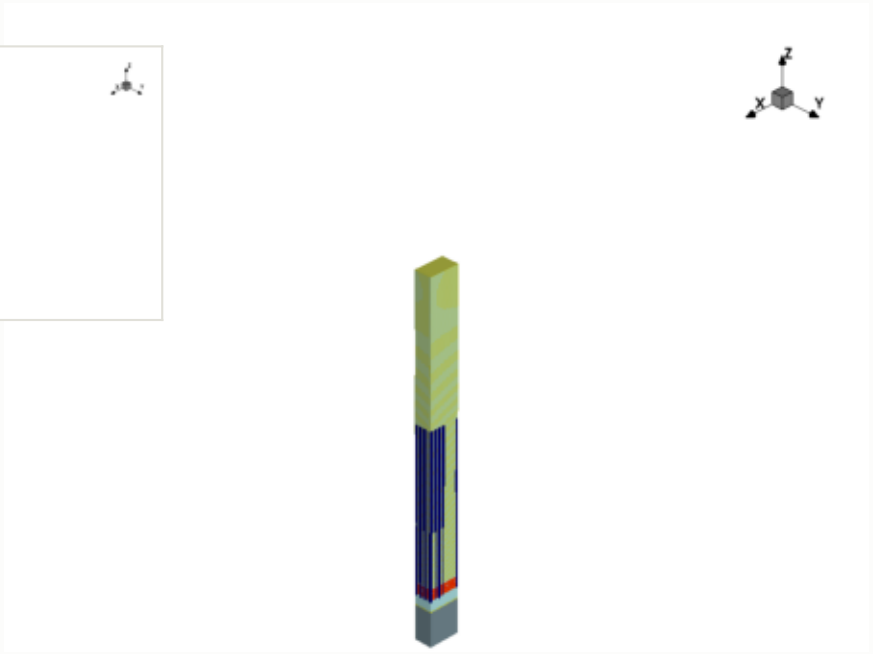

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

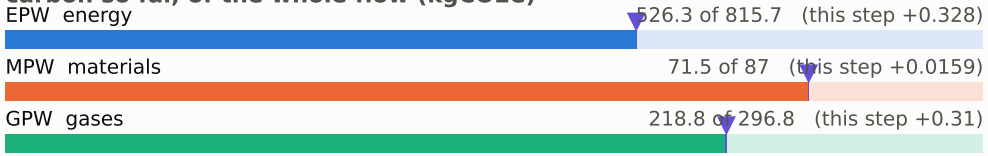

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

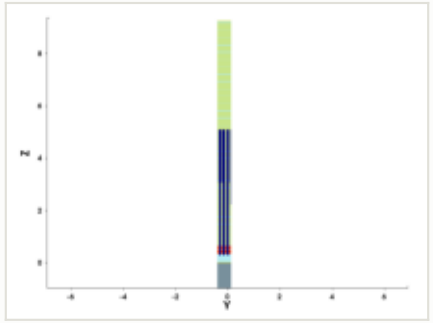

y cut at -0.150 µm

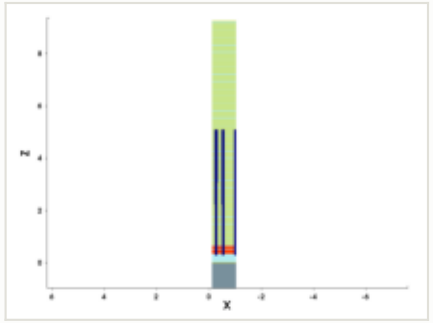

mask for this step

no mask for this step

steps by process area

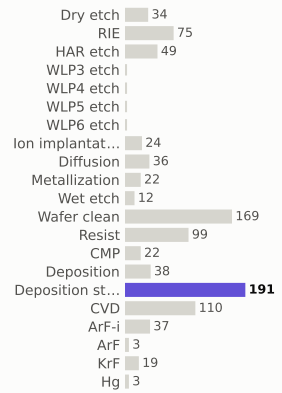

materials deposited (g)

gases emitted (g)

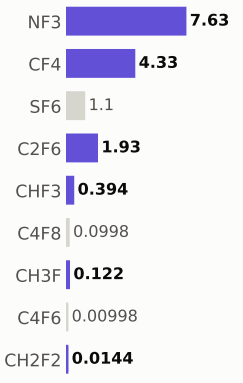

Step #18510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	817.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

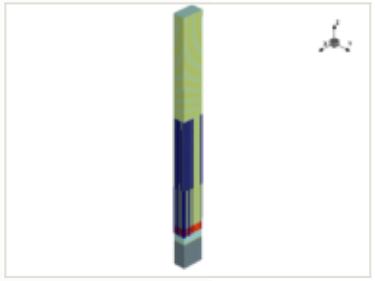

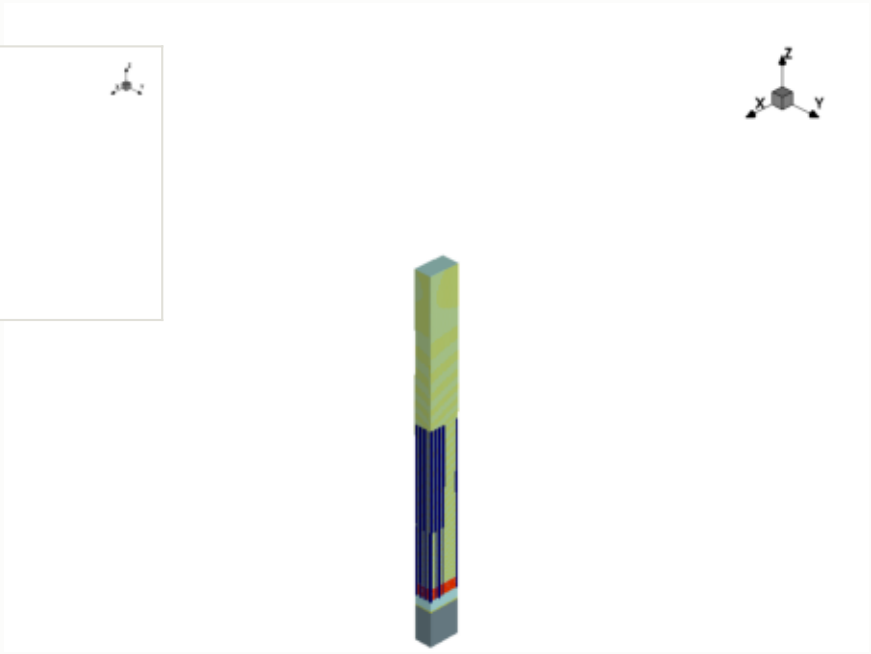

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

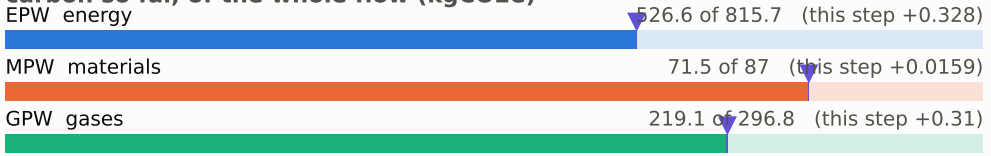

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

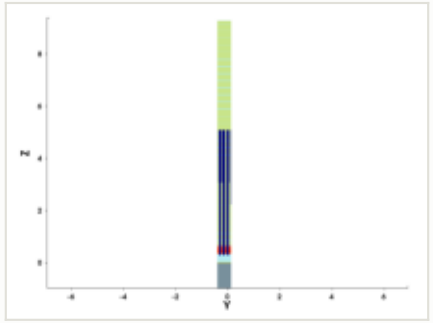

y cut at -0.150 µm

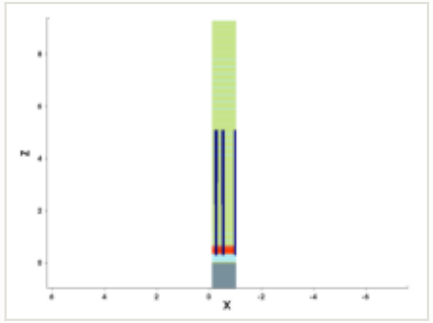

mask for this step

no mask for this step

steps by process area

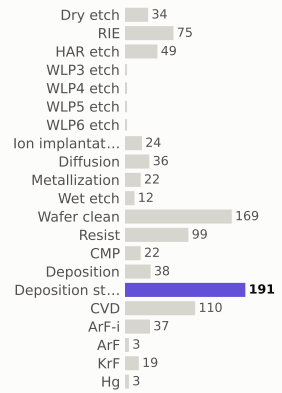

materials deposited (g)

gases emitted (g)

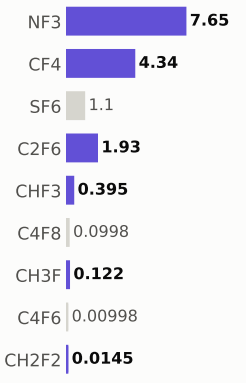

Step #18520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	817.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

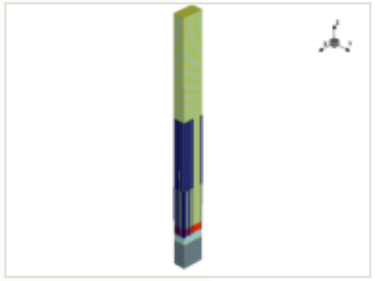

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

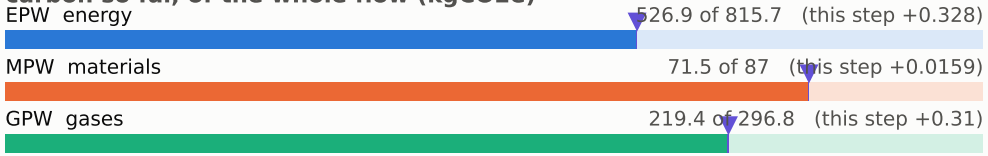

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

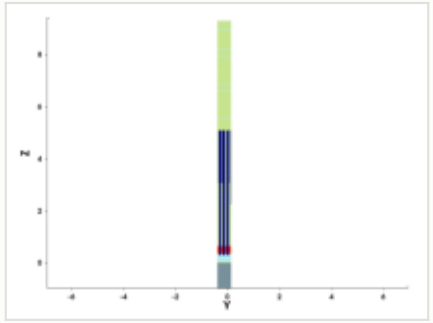

y cut at -0.150 µm

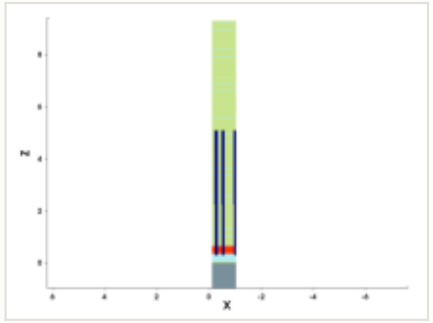

mask for this step

no mask for this step

steps by process area

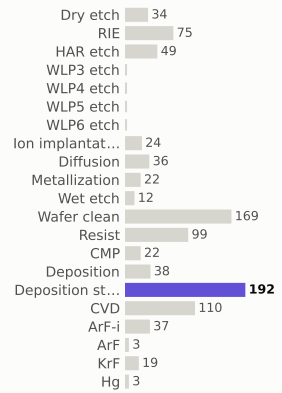

materials deposited (g)

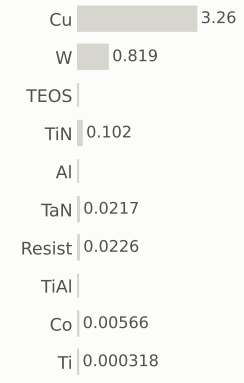

gases emitted (g)

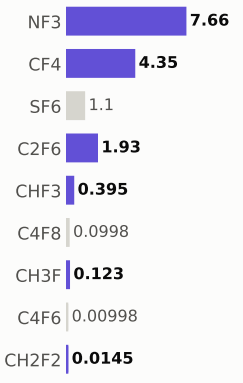

Step #18530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	818.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

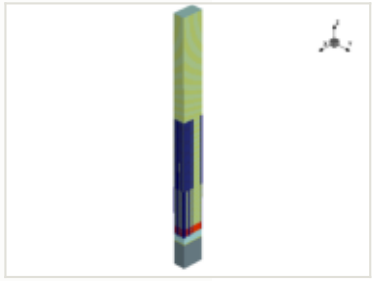

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

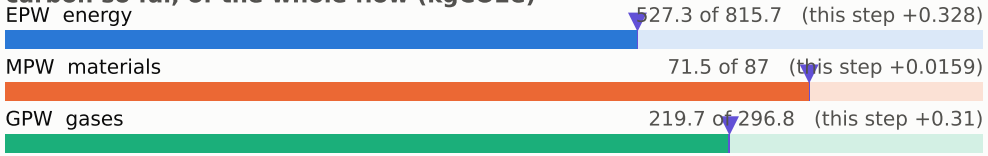

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

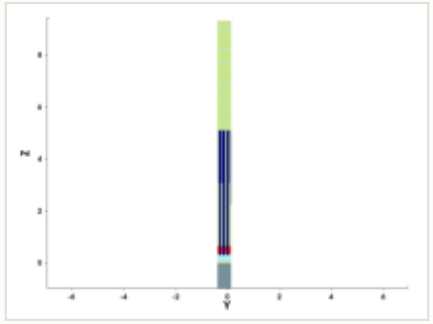

y cut at -0.150 µm

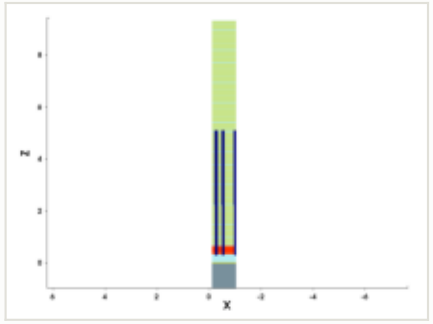

mask for this step

no mask for this step

steps by process area

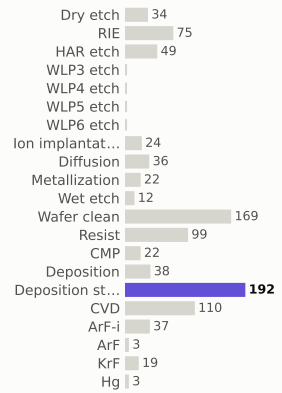

materials deposited (g)

gases emitted (g)

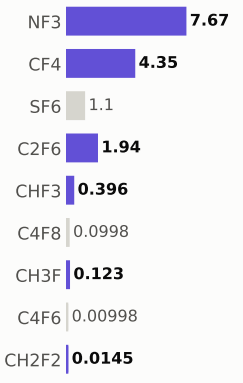

Step #18540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	819.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

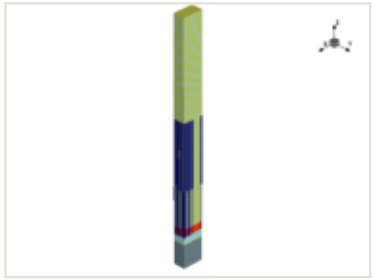

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

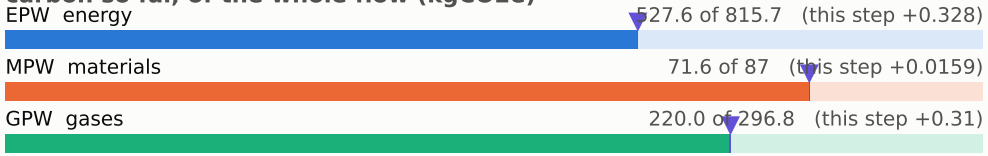

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

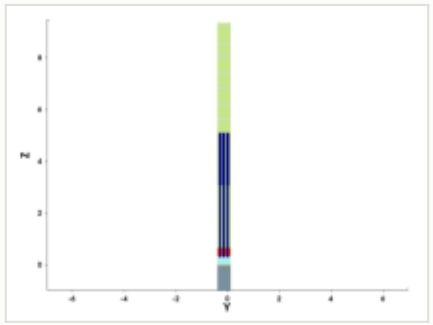

y cut at -0.150 µm

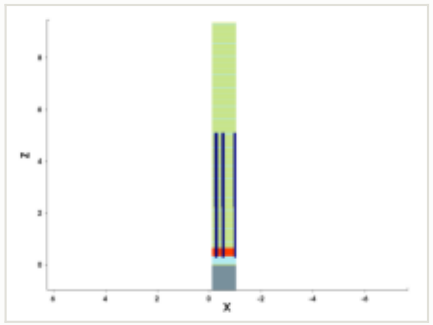

mask for this step

no mask for this step

steps by process area

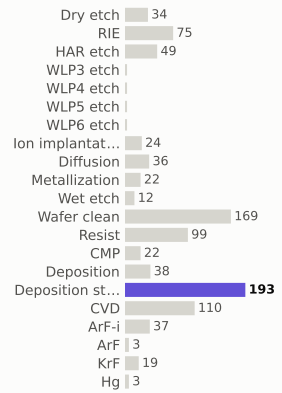

materials deposited (g)

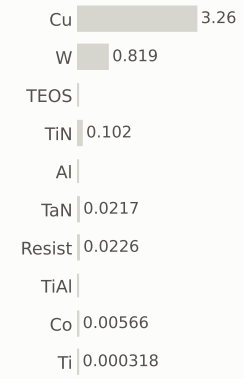

gases emitted (g)

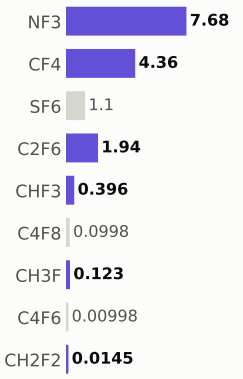

Step #18550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	819.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

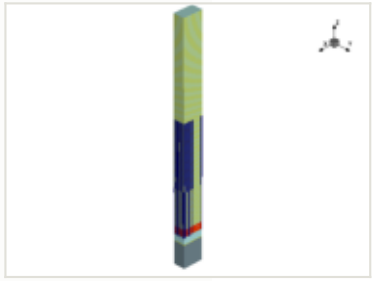

x cut at -0.570 µm

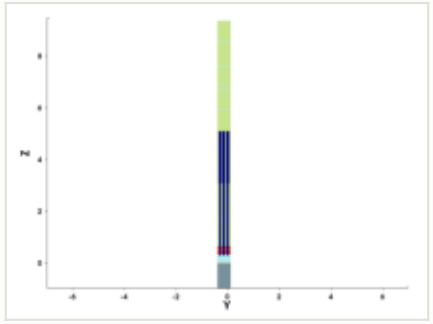

y cut at -0.150 µm

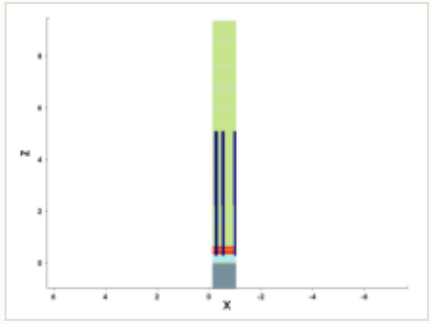

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

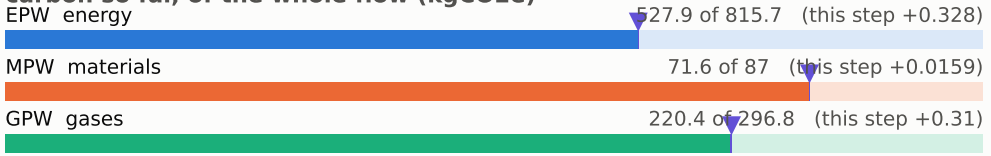

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

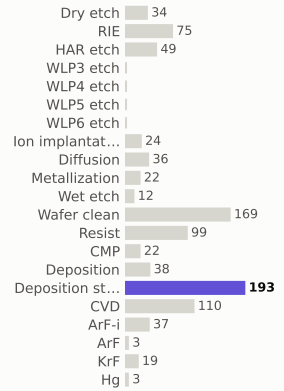

materials deposited (g)

gases emitted (g)

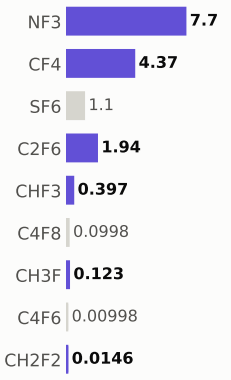

Step #18560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	820.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

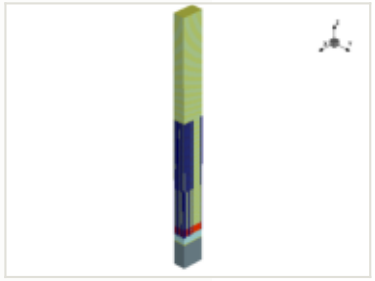

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

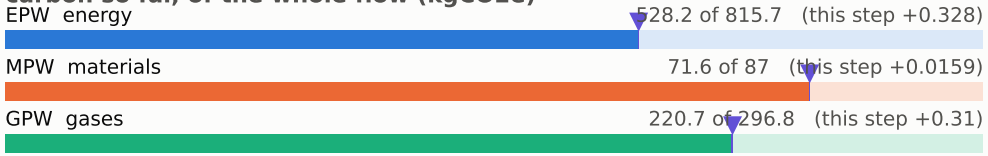

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

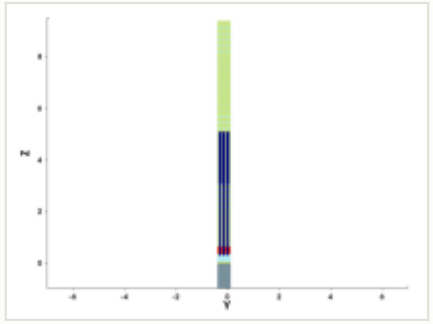

y cut at -0.150 µm

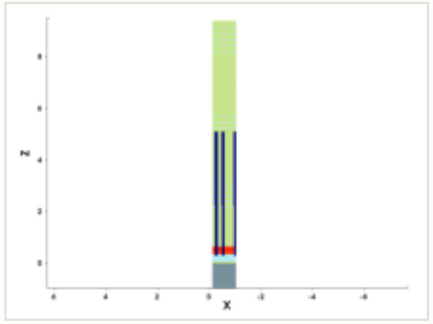

mask for this step

no mask for this step

steps by process area

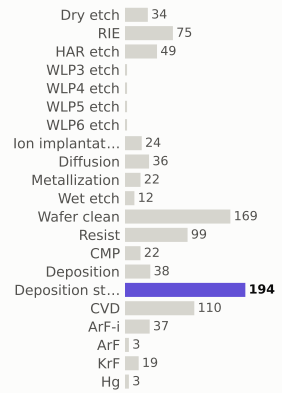

materials deposited (g)

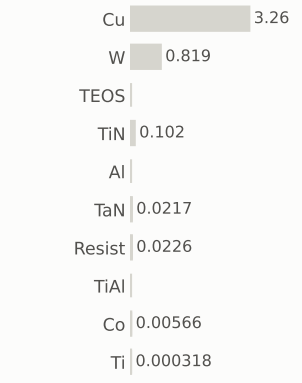

gases emitted (g)

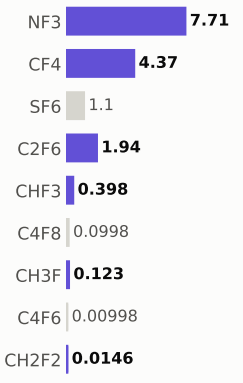

Step #18570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	821.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

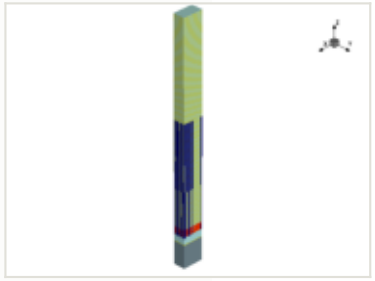

x cut at -0.570 µm

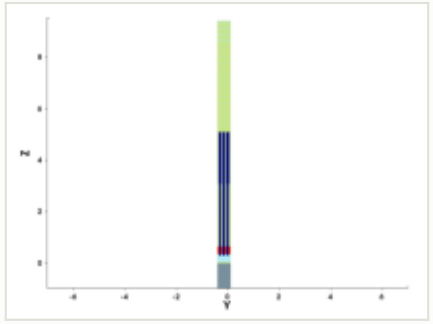

y cut at -0.150 µm

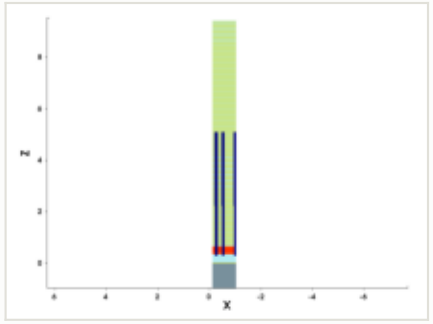

mask for this step

no mask for this step

this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

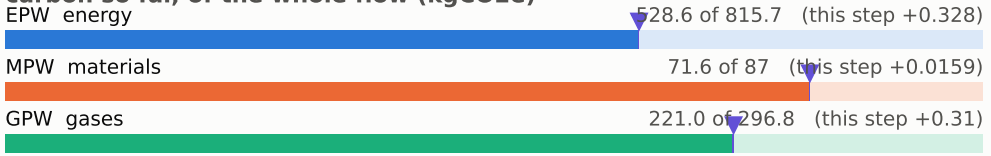

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

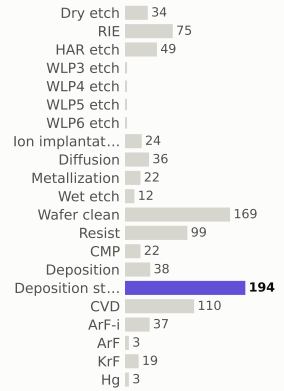

materials deposited (g)

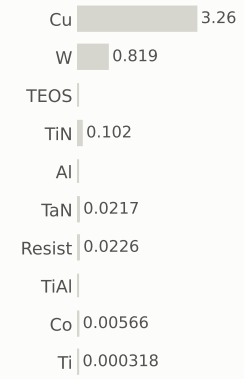

gases emitted (g)

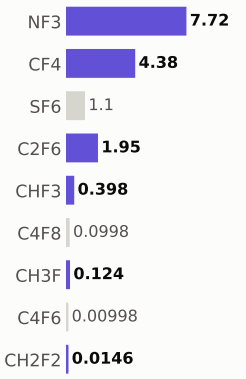

Step #18580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	821.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

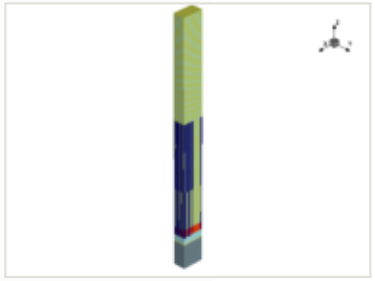

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

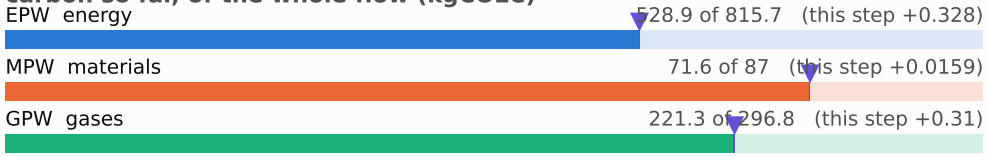

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

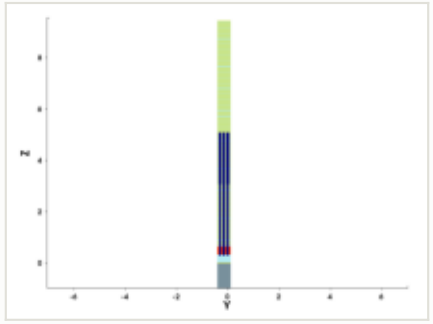

y cut at -0.150 µm

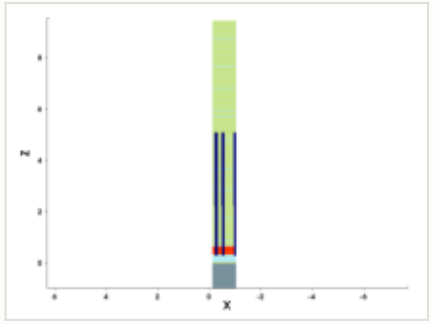

mask for this step

no mask for this step

steps by process area

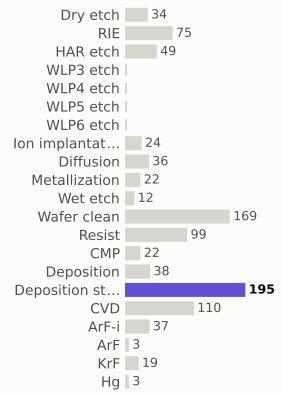

materials deposited (g)

gases emitted (g)

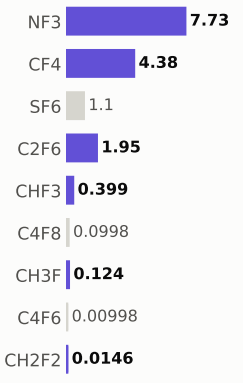

Step #18590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	822.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

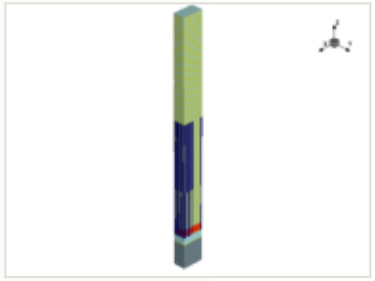

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

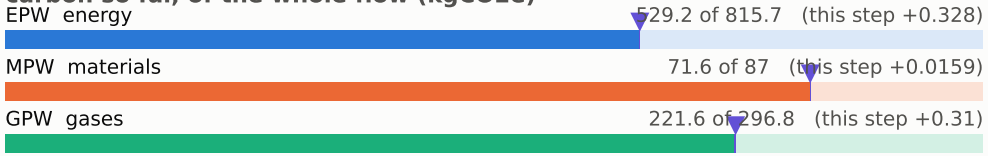

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

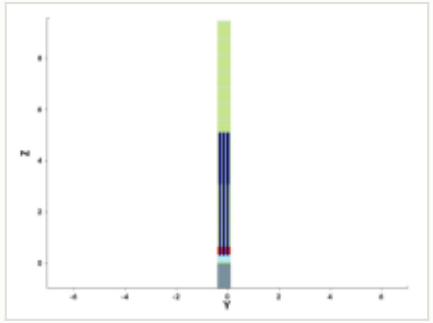

y cut at -0.150 µm

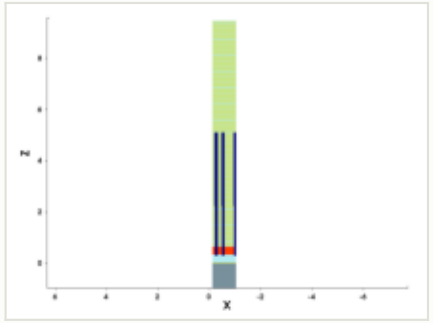

mask for this step

no mask for this step

steps by process area

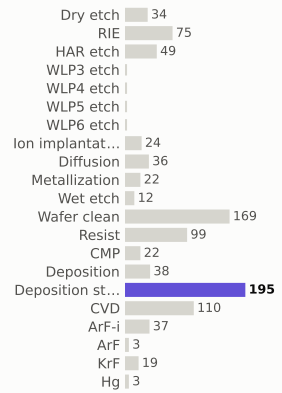

materials deposited (g)

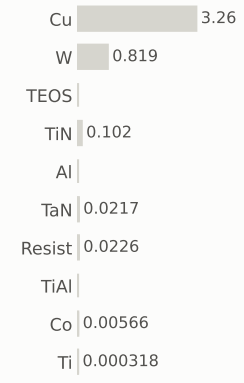

gases emitted (g)

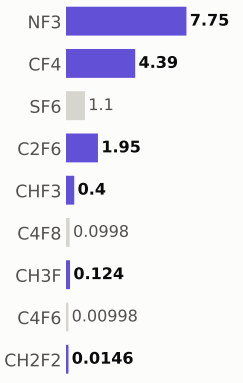

Step #18600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	823.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

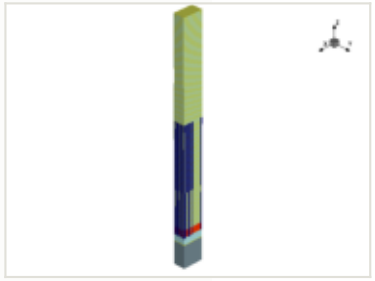

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

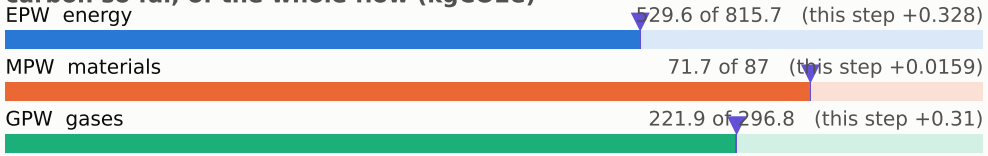

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

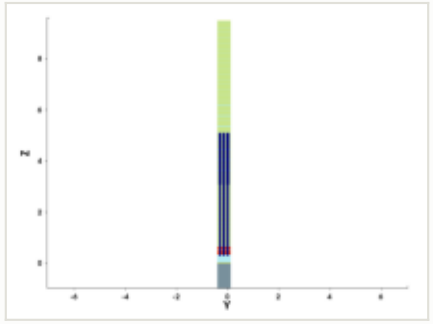

y cut at -0.150 µm

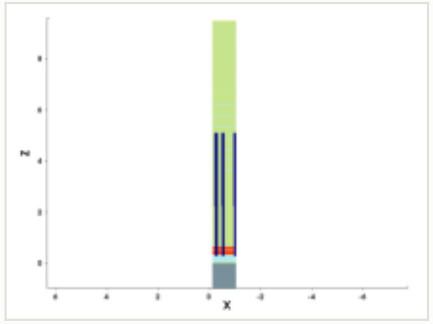

mask for this step

no mask for this step

steps by process area

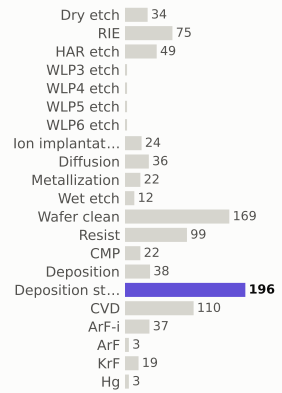

materials deposited (g)

gases emitted (g)

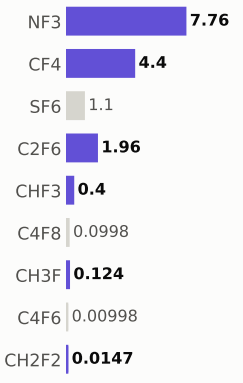

Step #18610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	823.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

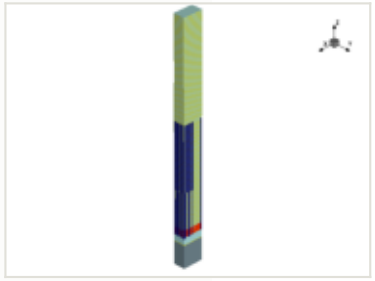

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

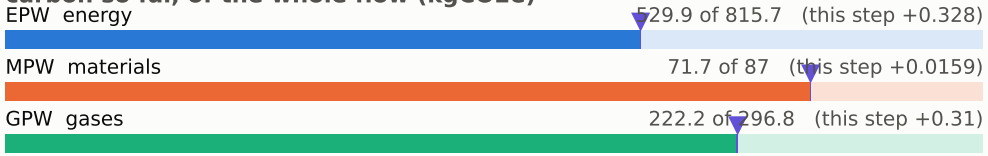

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

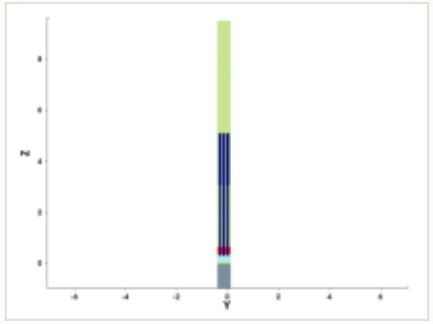

y cut at -0.150 µm

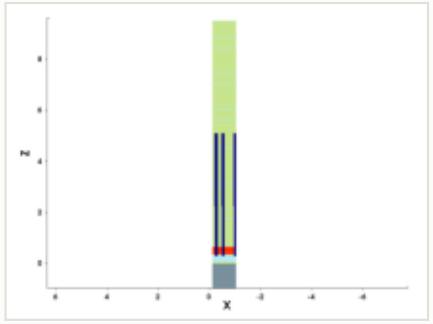

mask for this step

no mask for this step

steps by process area

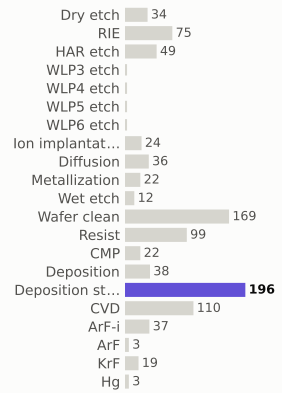

materials deposited (g)

gases emitted (g)

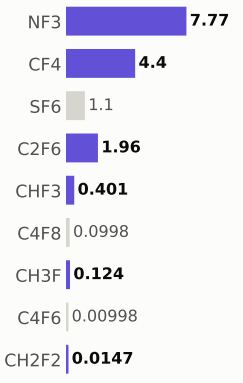

Step #18620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	824.4	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

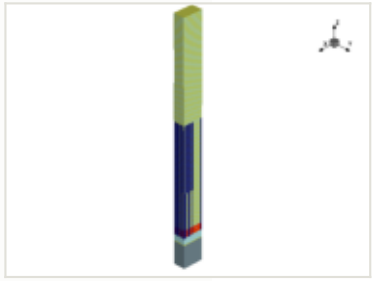

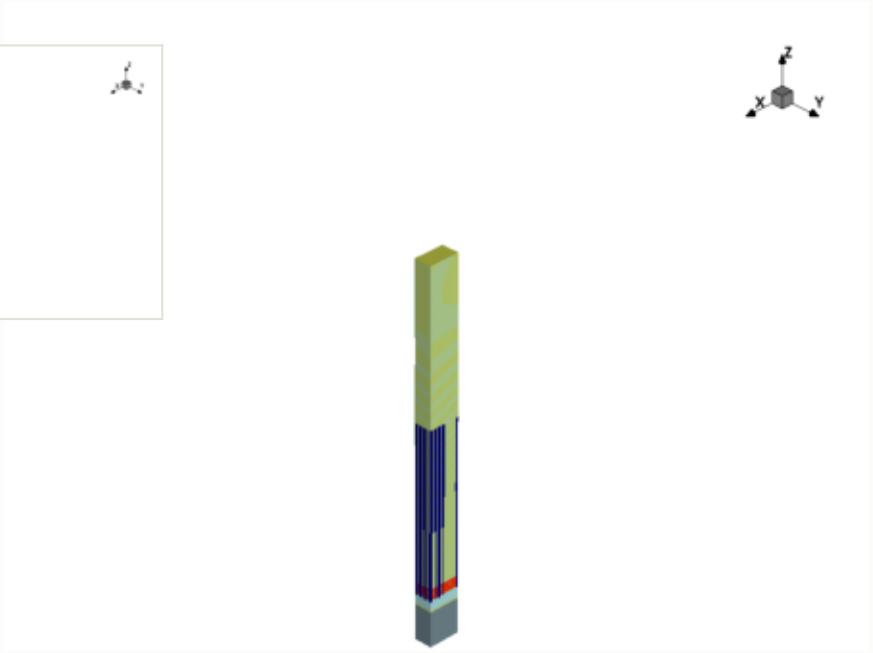

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.025 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

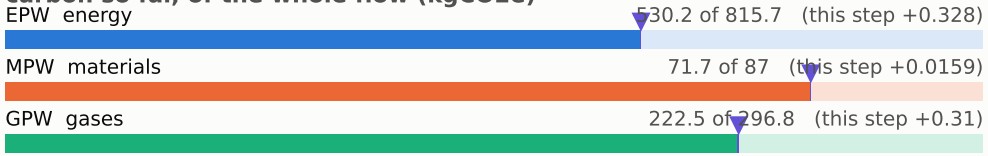

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

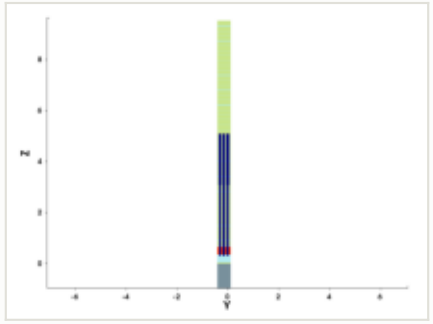

y cut at -0.150 µm

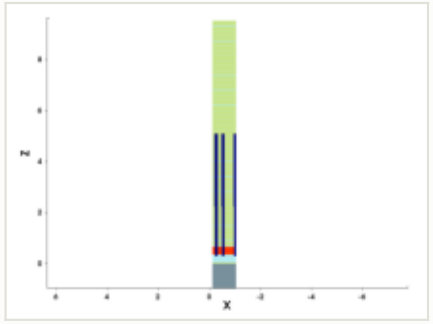

mask for this step

no mask for this step

steps by process area

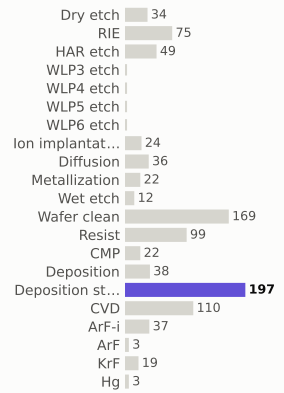

materials deposited (g)

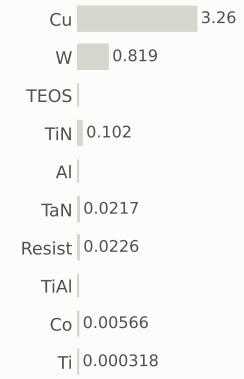

gases emitted (g)

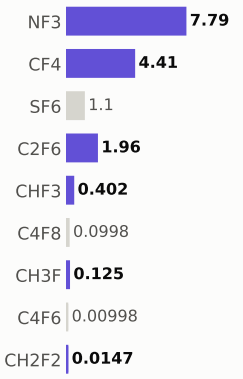

Step #18640: KrF

litho_patterning · KrF

0.199	824.6	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

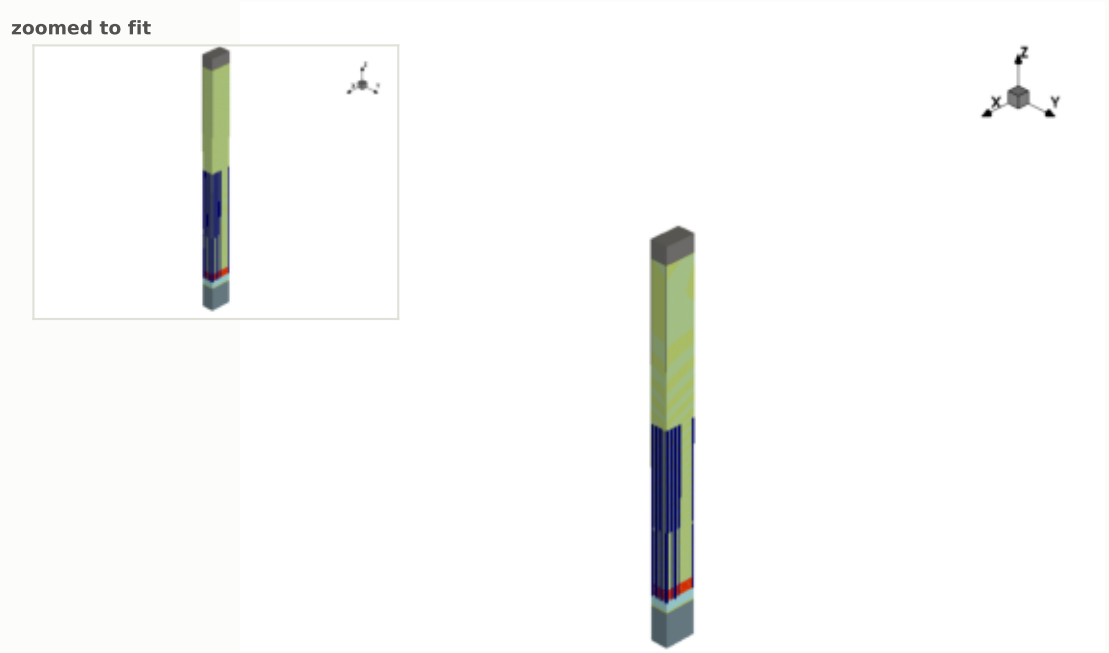

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

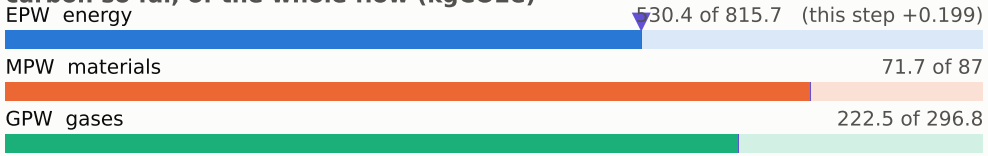

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

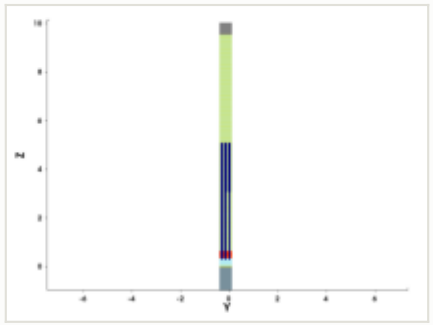

y cut at -0.150 µm

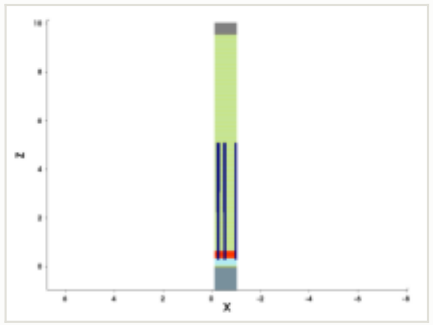

mask: layer 28:0, positive (GDSII)

steps by process area

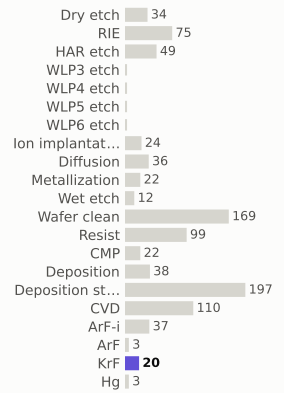

materials deposited (g)

gases emitted (g)

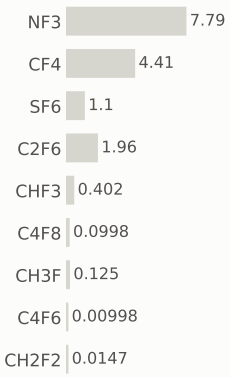

Step #18650: RIE

etch_anisotropic · RIE

1.04	825.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

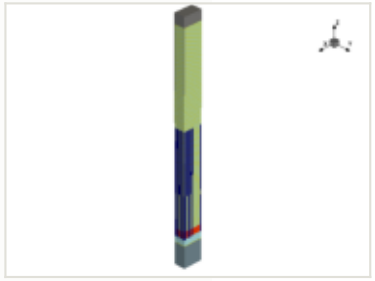

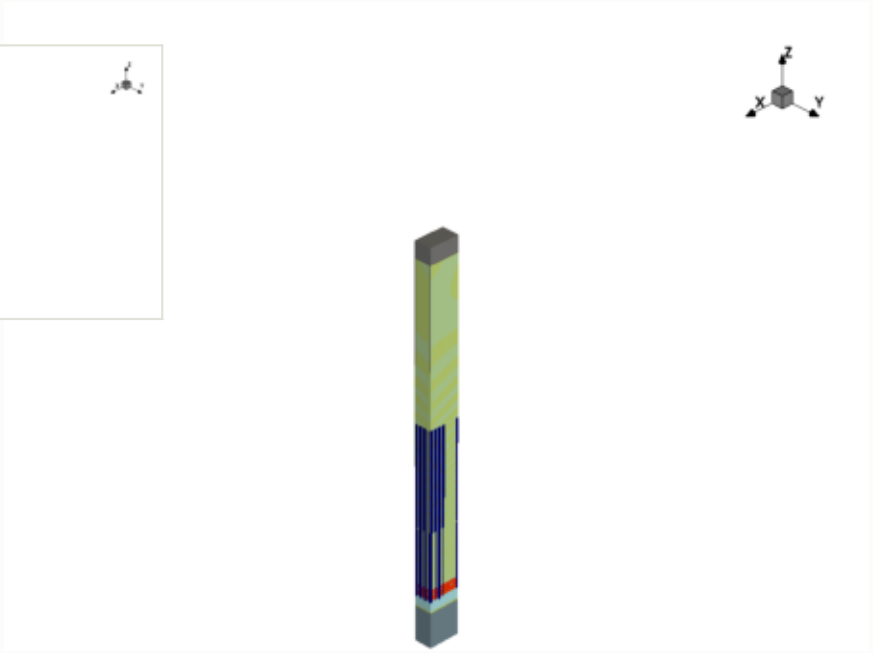

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

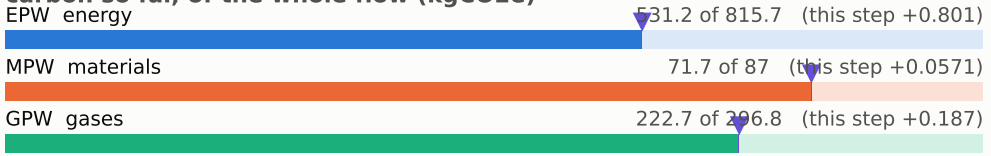

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

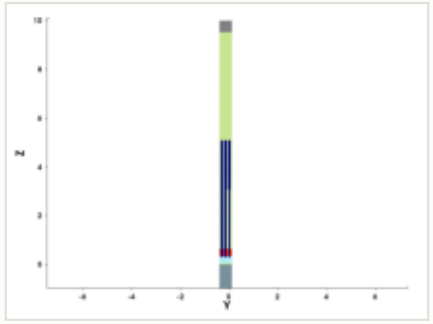

y cut at -0.150 µm

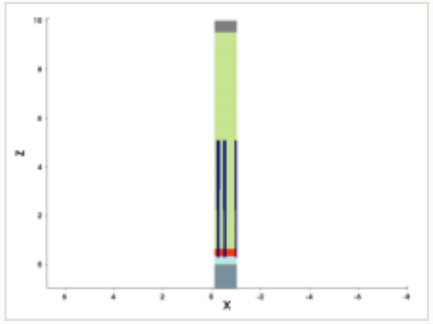

mask for this step

no mask for this step

steps by process area

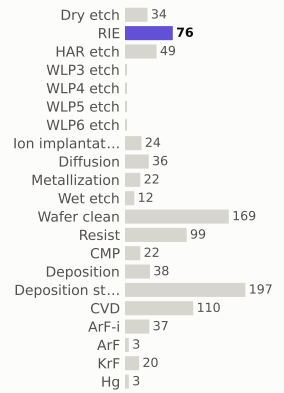

materials deposited (g)

gases emitted (g)

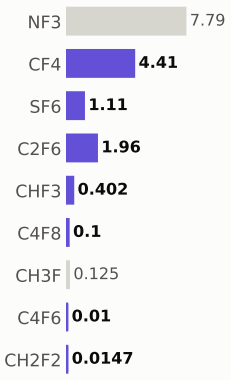

Step #18660: RIE

etch_anisotropic · RIE

1.04	826.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

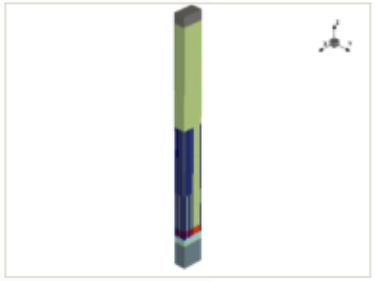

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

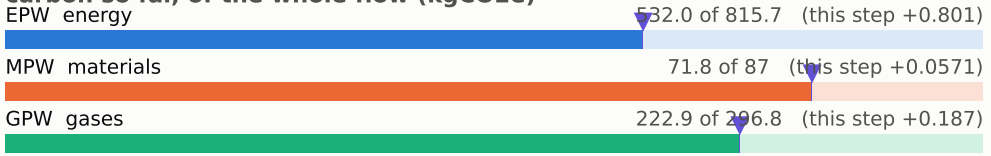

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

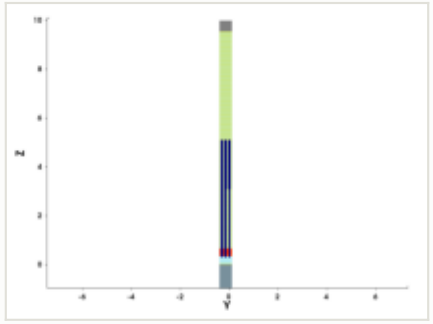

y cut at -0.150 µm

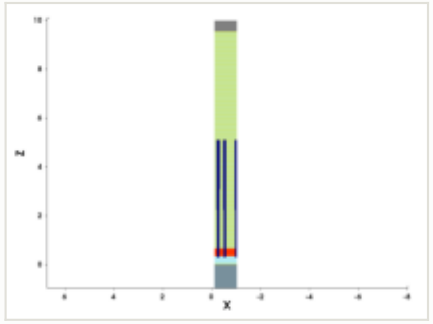

mask for this step

no mask for this step

steps by process area

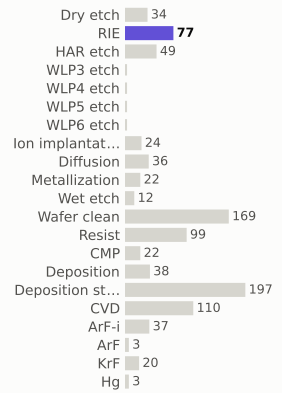

materials deposited (g)

gases emitted (g)

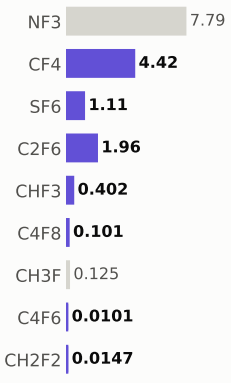

Step #18670: Dry_etch

etch_strip · Dry_etch

0.801	827.5	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

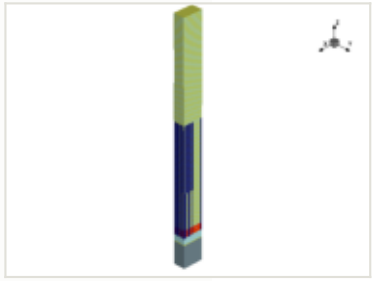

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

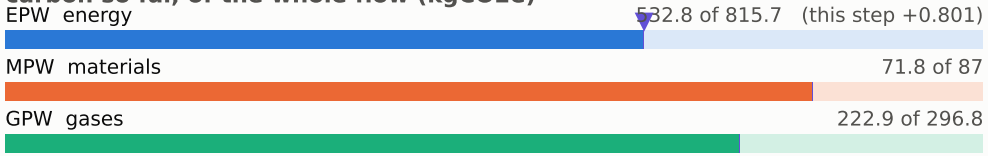

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

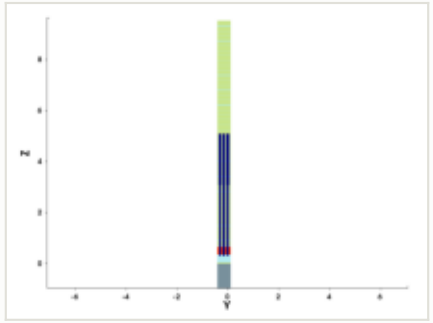

y cut at -0.150 µm

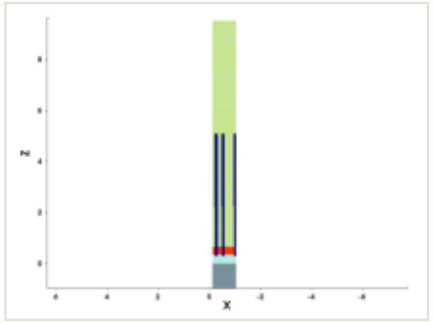

mask for this step

no mask for this step

steps by process area

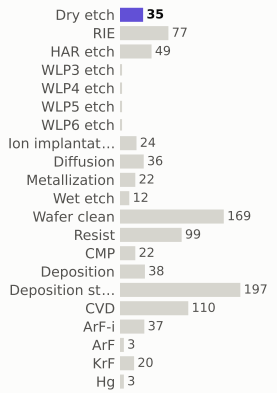

materials deposited (g)

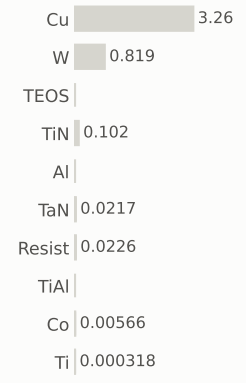

gases emitted (g)

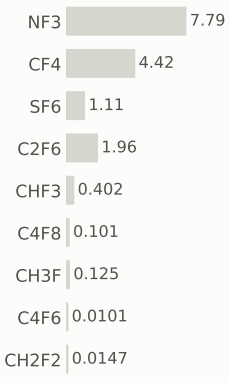

Step #18680: Wafer_clean

clean · Wafer_clean

0.169	827.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

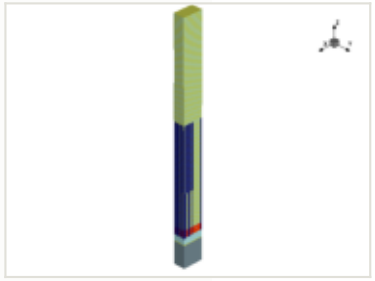

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

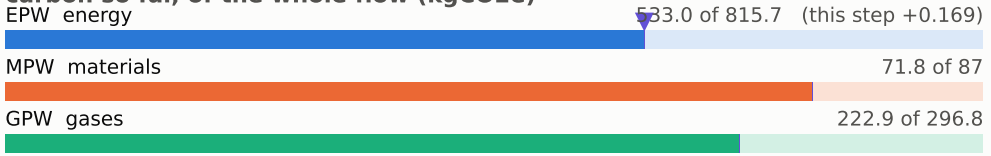

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

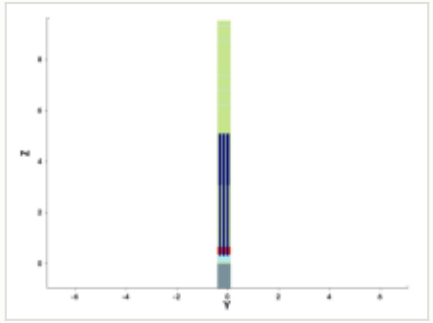

y cut at -0.150 µm

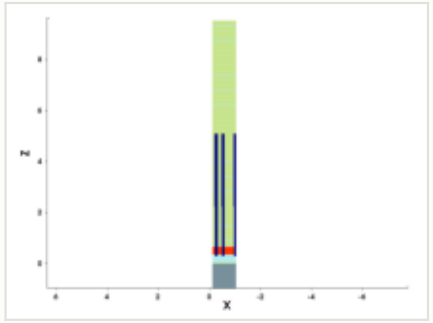

mask for this step

no mask for this step

steps by process area

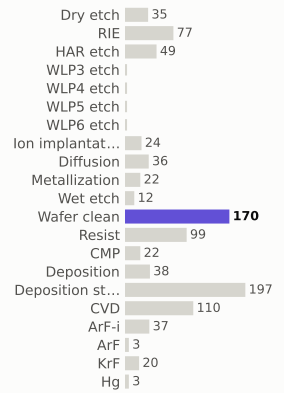

materials deposited (g)

gases emitted (g)

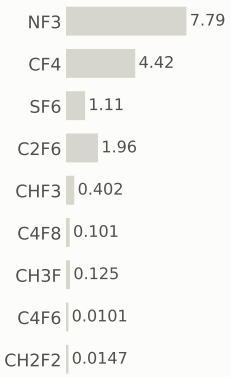

Step #18690: KrF

litho_patterning · KrF

0.199	827.9	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

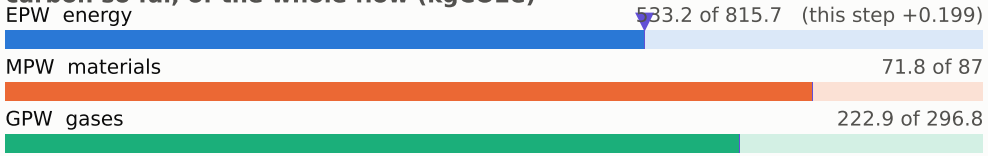

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

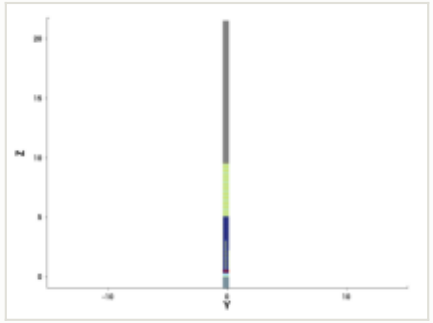

y cut at -0.150 µm

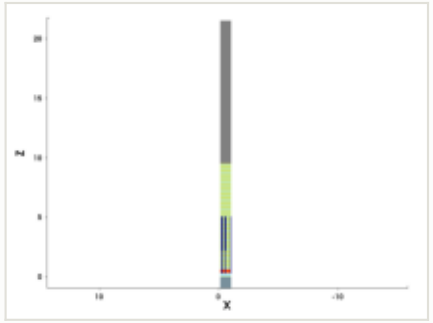

mask: layer 29:0, positive (GDSII)

steps by process area

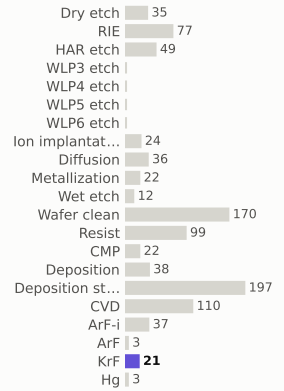

materials deposited (g)



gases emitted (g)

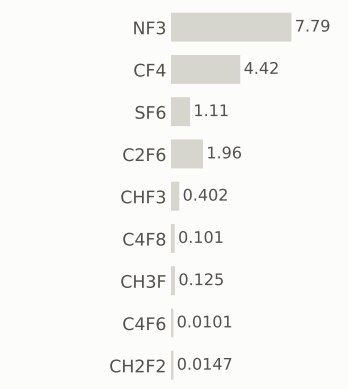

Step #18700: RIE

etch_anisotropic · RIE

1.04	828.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

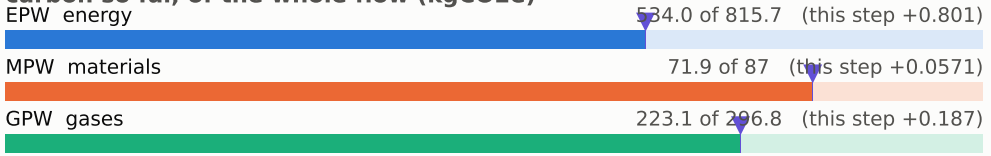

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

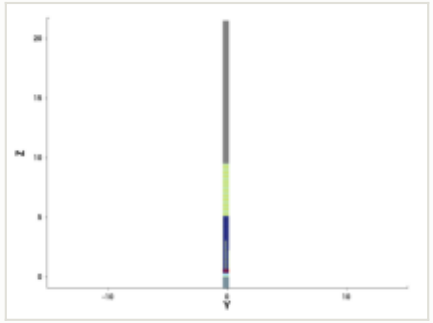

y cut at -0.150 µm

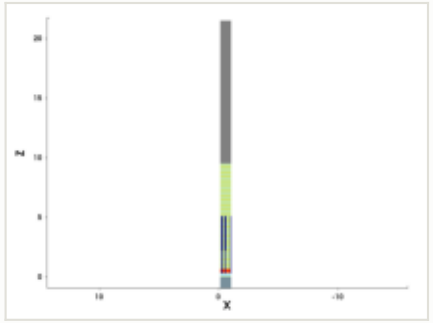

mask for this step

no mask for this step

steps by process area

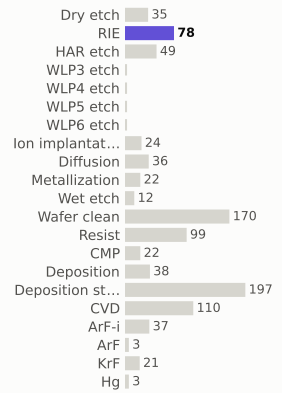

materials deposited (g)

gases emitted (g)

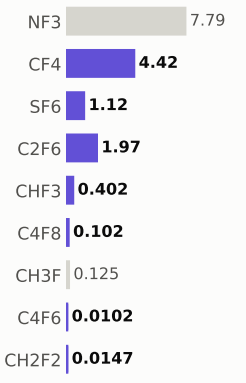

Step #18710: RIE

etch_anisotropic · RIE

1.04	830.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

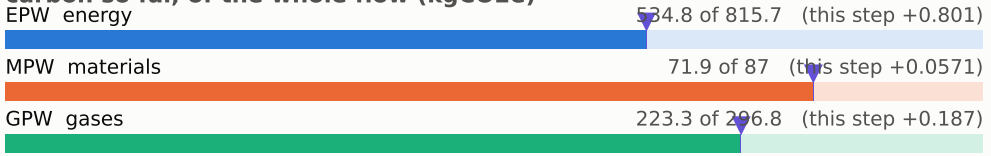

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

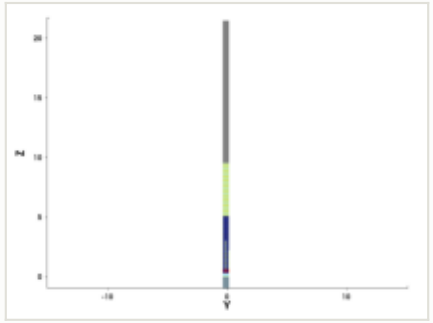

y cut at -0.150 µm

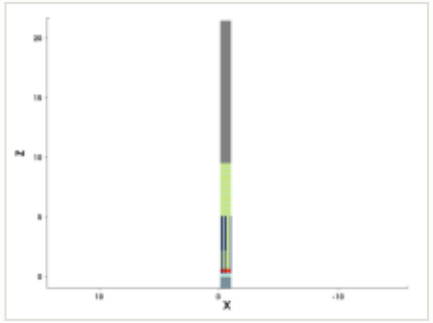

mask for this step

no mask for this step

steps by process area

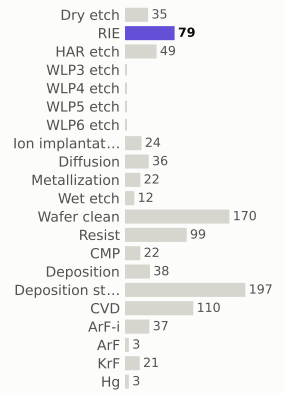

materials deposited (g)

gases emitted (g)

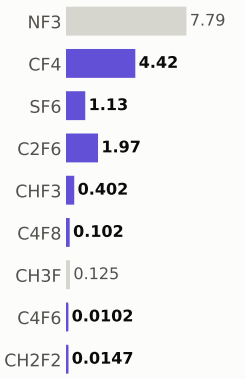

Step #18720: RIE

etch_anisotropic · RIE

1.04	831.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

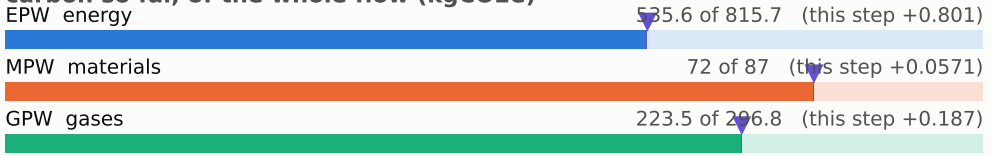

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

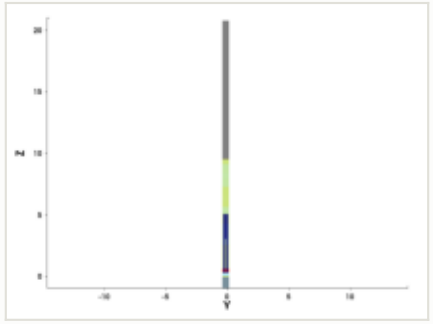

y cut at -0.150 µm

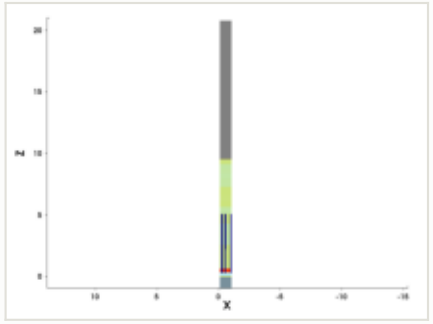

mask for this step

no mask for this step

steps by process area

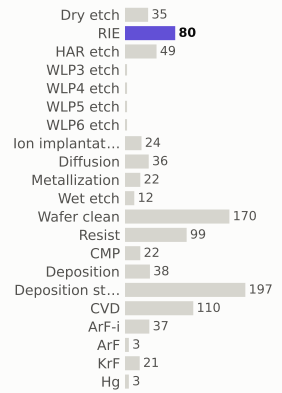

materials deposited (g)

gases emitted (g)

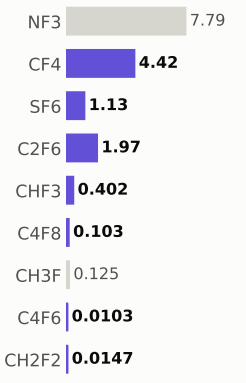

Step #18730: RIE

etch_anisotropic · RIE

1.04	832.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

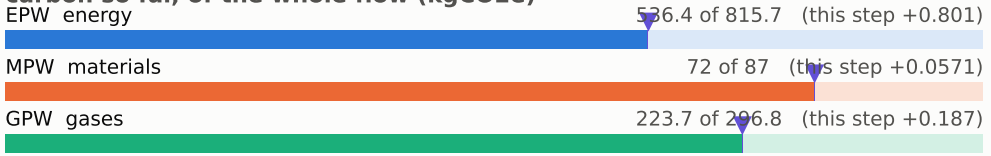

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

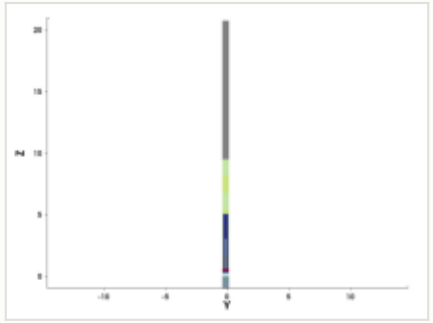

y cut at -0.150 µm

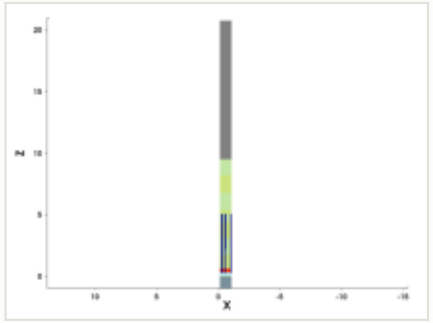

mask for this step

no mask for this step

steps by process area

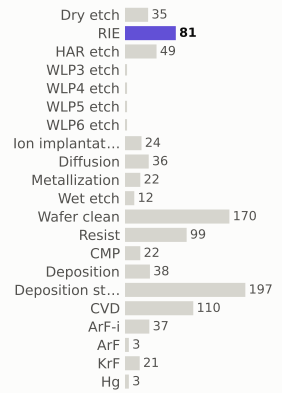

materials deposited (g)

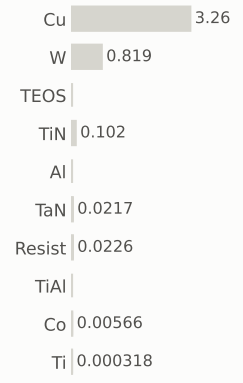

gases emitted (g)

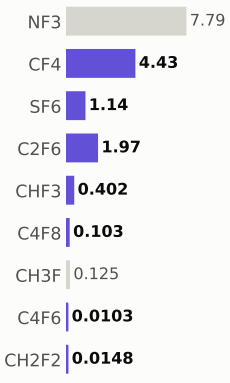

Step #18740: RIE

etch_anisotropic · RIE

1.04	833.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

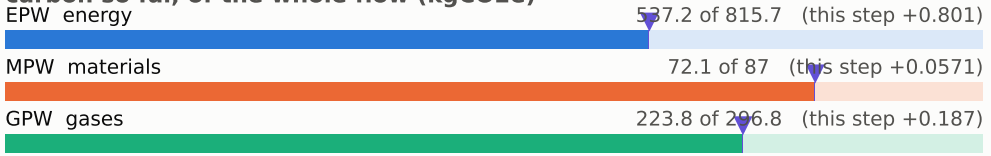

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

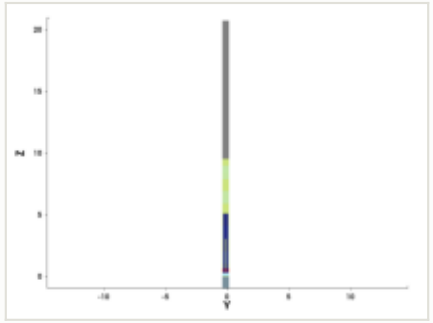

y cut at -0.150 µm

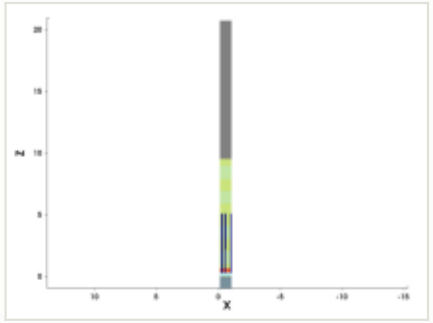

mask for this step

no mask for this step

steps by process area

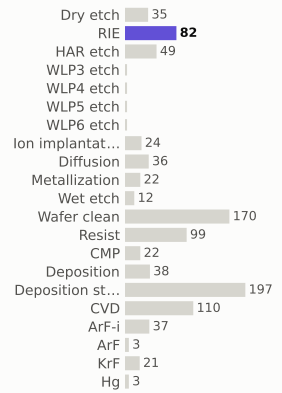

materials deposited (g)

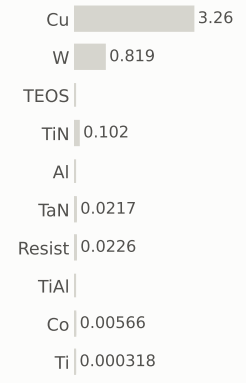

gases emitted (g)

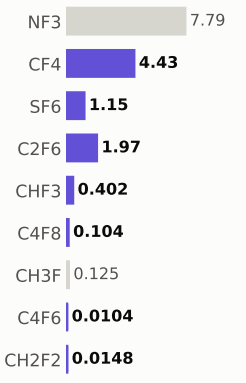

Step #18750: RIE

etch_anisotropic · RIE

1.04	834.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

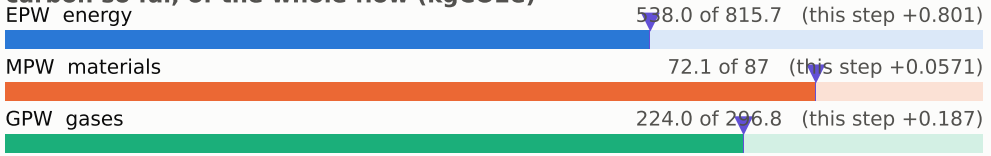

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

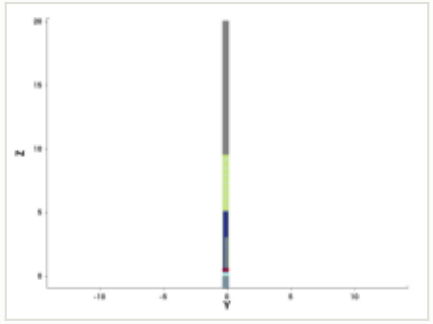

y cut at -0.150 µm

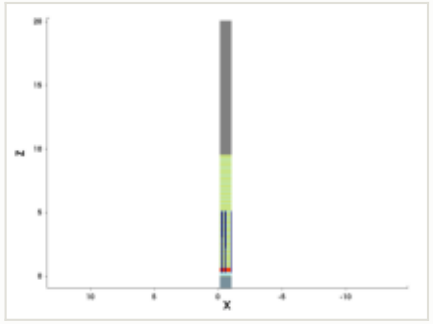

mask for this step

no mask for this step

steps by process area

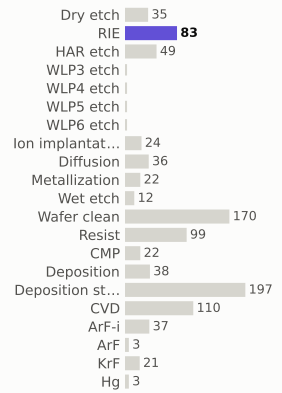

materials deposited (g)

gases emitted (g)

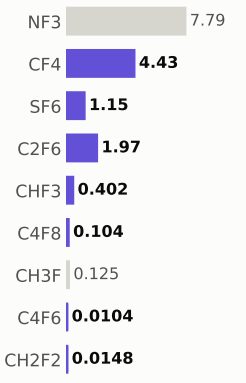

Step #18760: RIE

etch_anisotropic · RIE

1.04	835.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

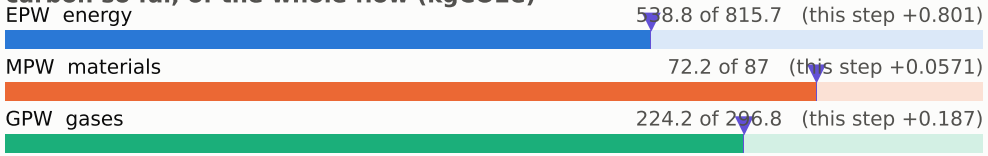

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

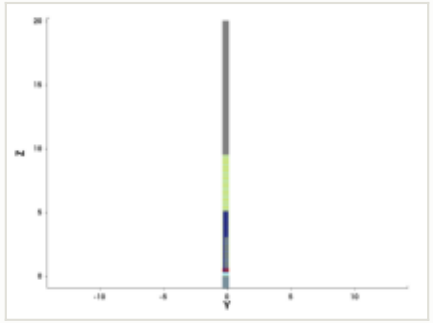

y cut at -0.150 µm

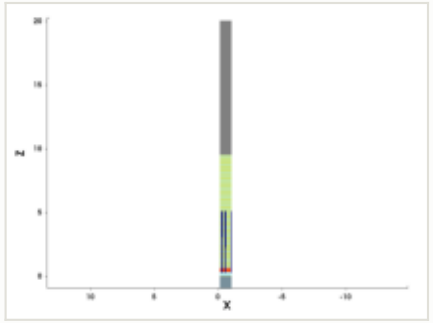

mask for this step

no mask for this step

steps by process area

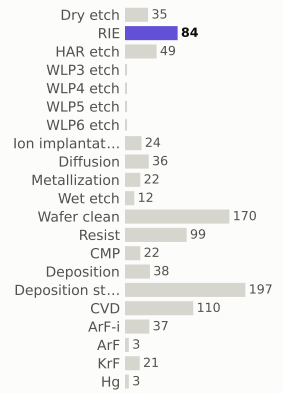

materials deposited (g)

gases emitted (g)

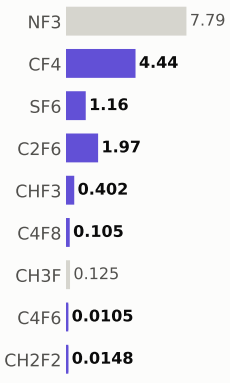

Step #18770: RIE

etch_anisotropic · RIE

1.04	836.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

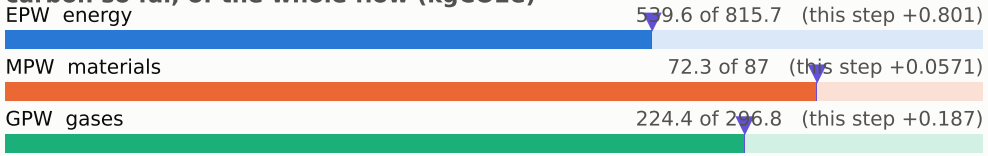

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

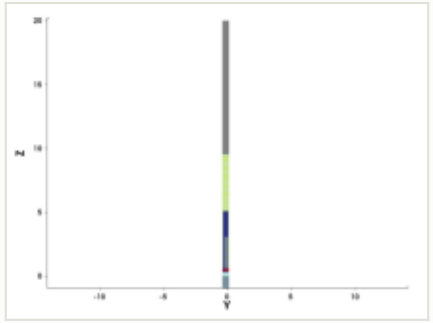

y cut at -0.150 µm

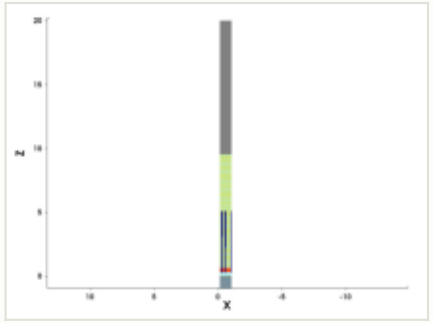

mask for this step

no mask for this step

steps by process area

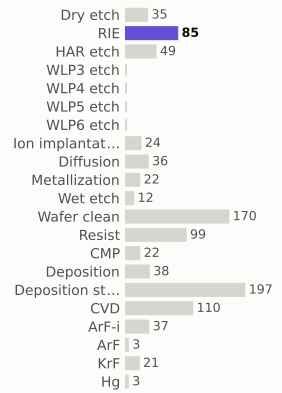

materials deposited (g)

gases emitted (g)

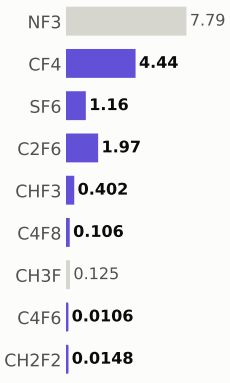

Step #18780: RIE

etch_anisotropic · RIE

1.04	837.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

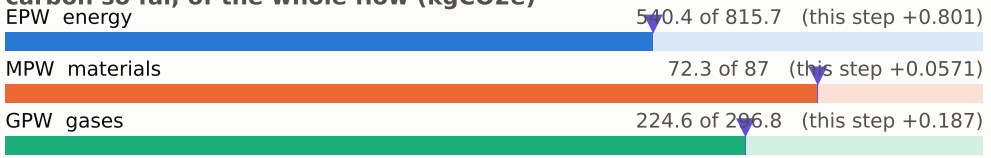

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

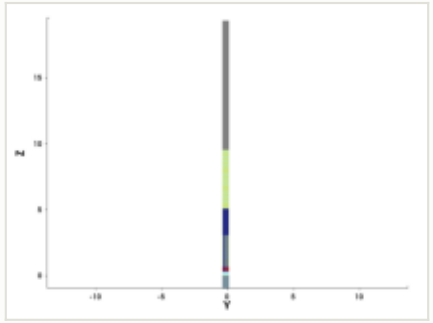

y cut at -0.150 µm

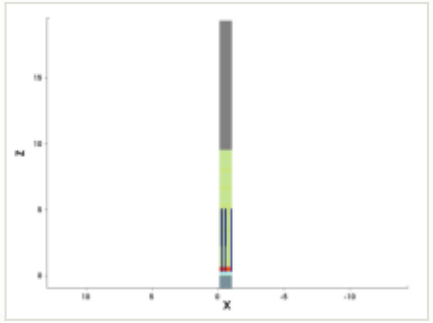

mask for this step

no mask for this step

steps by process area

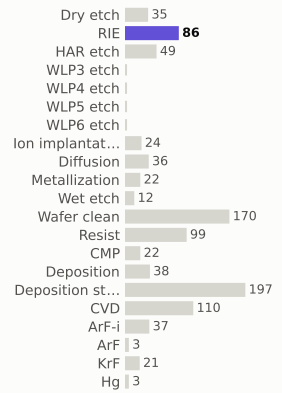

materials deposited (g)

gases emitted (g)



Step #18790: RIE

etch_anisotropic · RIE

1.04	838.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

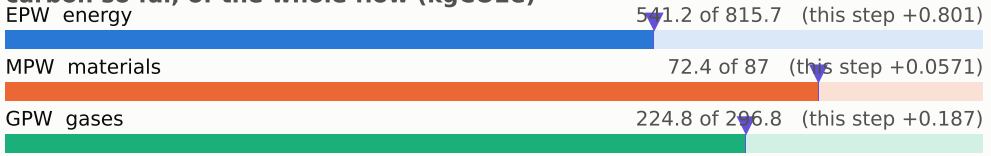

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

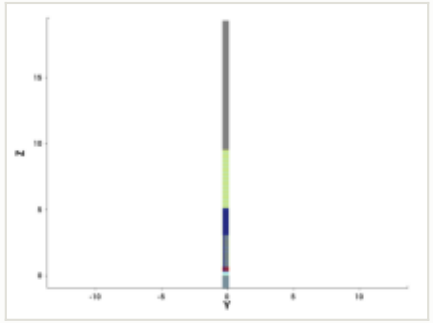

y cut at -0.150 µm

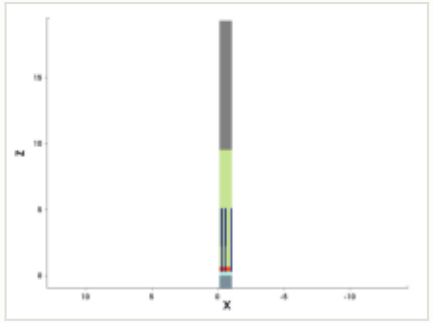

mask for this step

no mask for this step

steps by process area

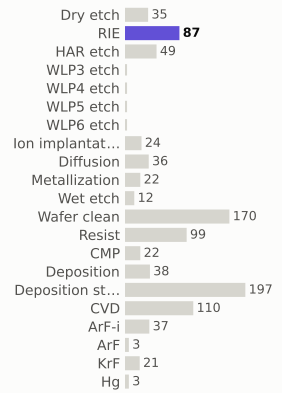

materials deposited (g)

gases emitted (g)

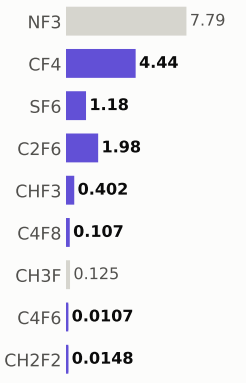

Step #18800: RIE

etch_anisotropic · RIE

1.04	839.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

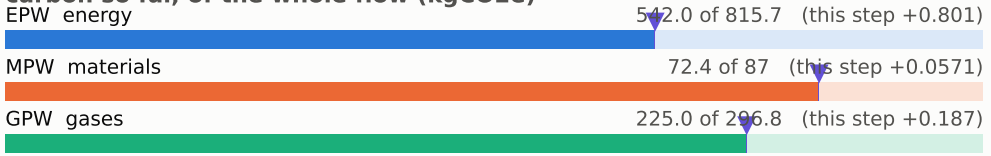

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

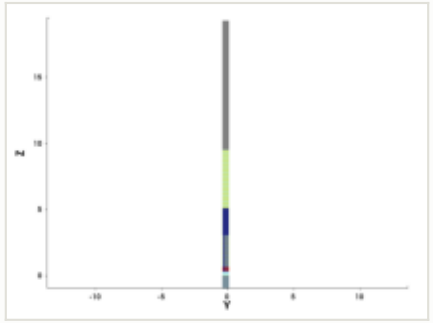

y cut at -0.150 µm

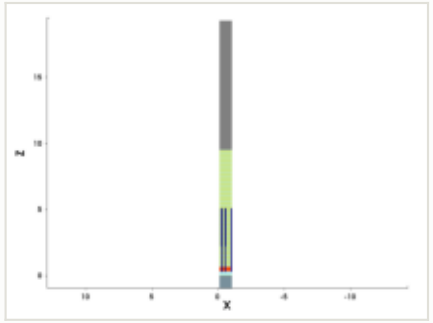

mask for this step

no mask for this step

steps by process area

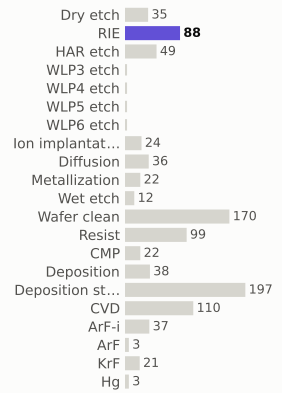

materials deposited (g)

gases emitted (g)

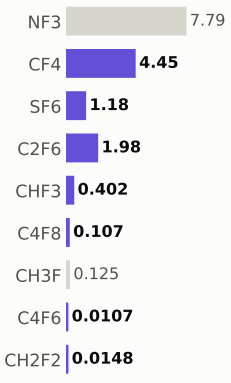

Step #18810: RIE

etch_anisotropic · RIE

1.04	840.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

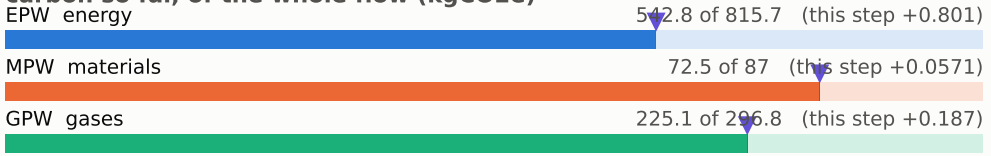

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

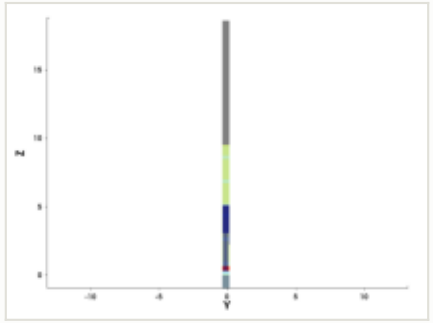

y cut at -0.150 µm

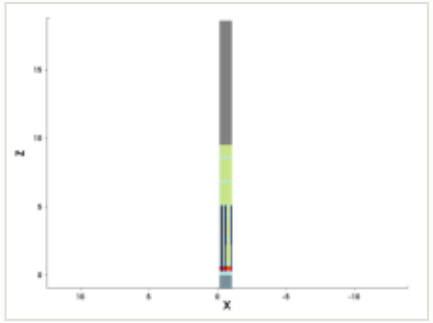

mask for this step

no mask for this step

steps by process area

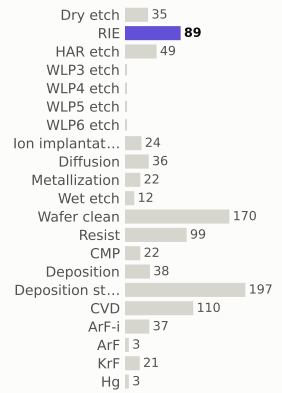

materials deposited (g)

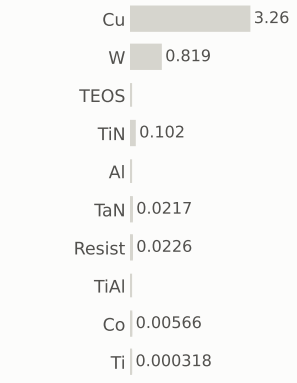

gases emitted (g)



Step #18820: RIE

etch_anisotropic · RIE

1.04	841.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

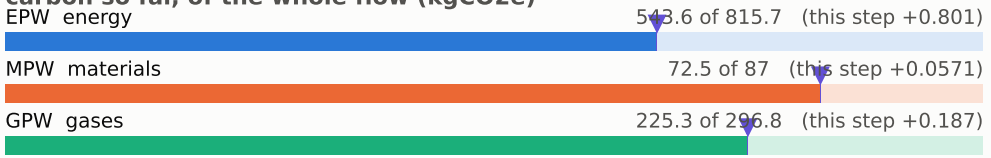

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

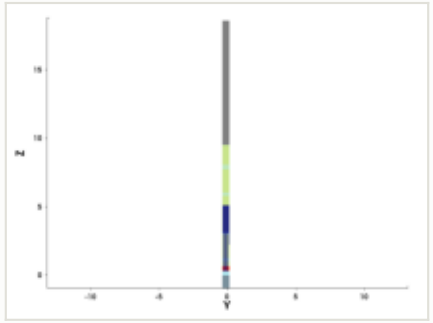

y cut at -0.150 µm

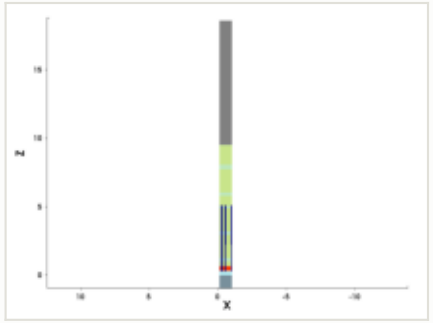

mask for this step

no mask for this step

steps by process area

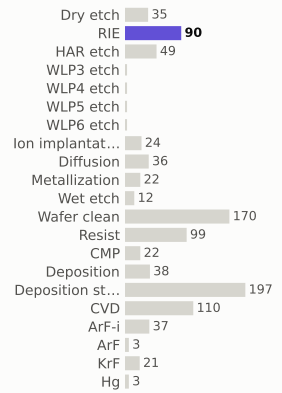

materials deposited (g)

gases emitted (g)

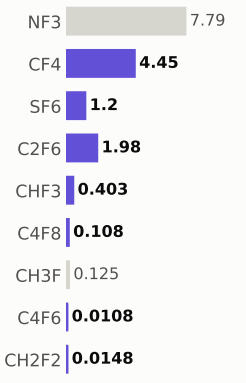

Step #18830: RIE

etch_anisotropic · RIE

1.04	842.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

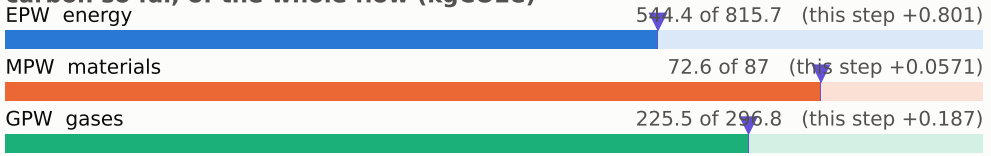

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

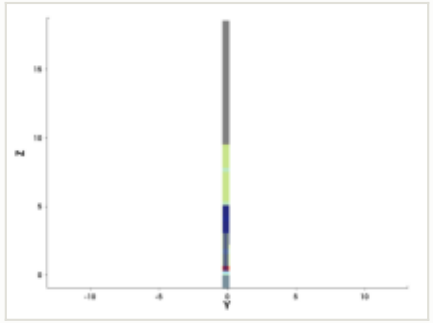

y cut at -0.150 µm

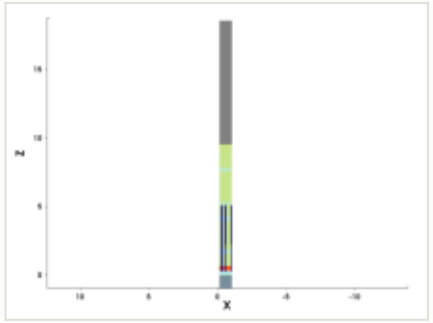

mask for this step

no mask for this step

steps by process area

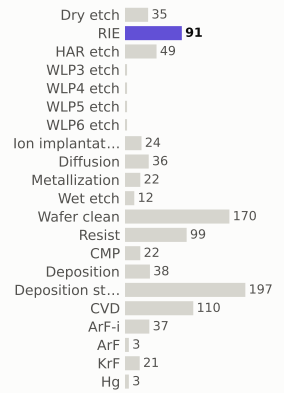

materials deposited (g)

gases emitted (g)

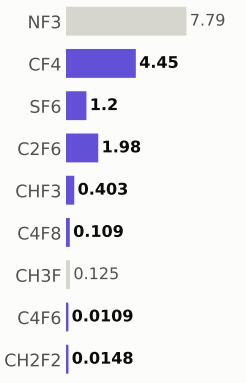

Step #18840: RIE

etch_anisotropic · RIE

1.04	843.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

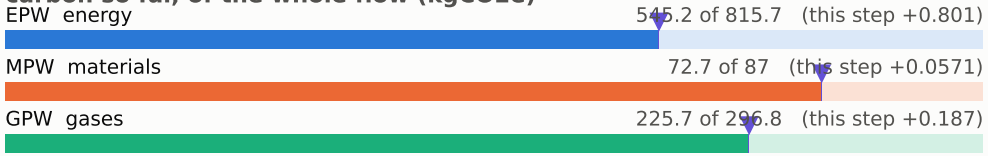

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

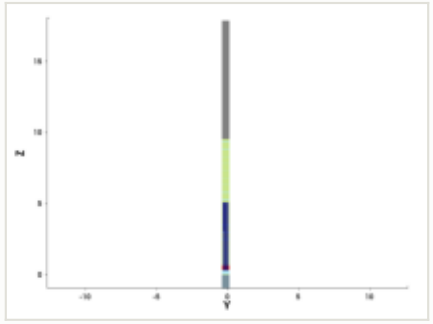

y cut at -0.150 µm

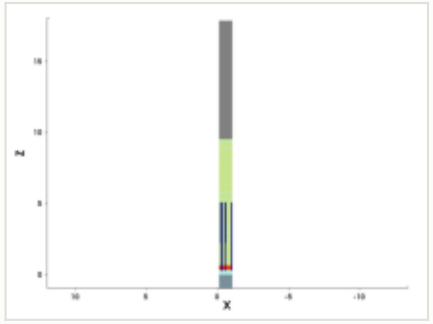

mask for this step

no mask for this step

steps by process area

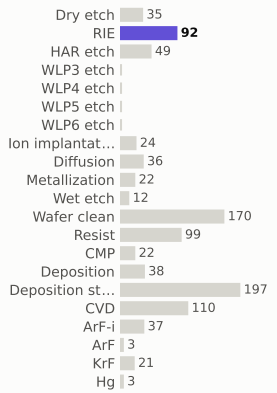

materials deposited (g)

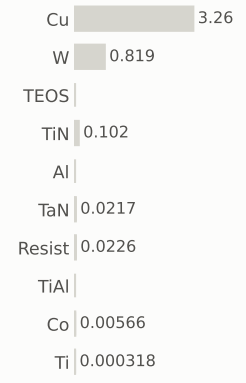

gases emitted (g)

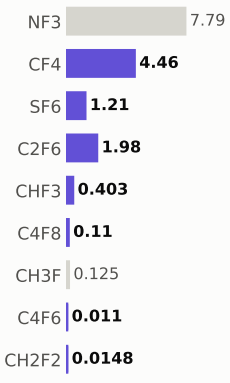

Step #18850: RIE

etch_anisotropic · RIE

1.04	844.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

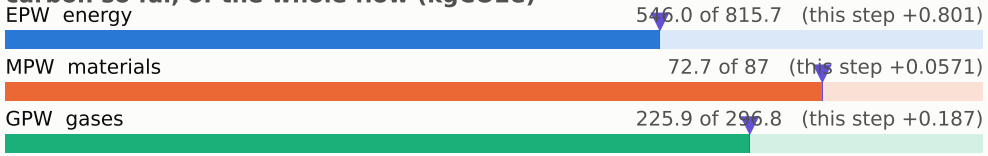

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

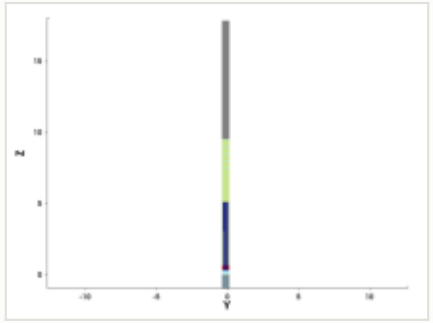

y cut at -0.150 µm

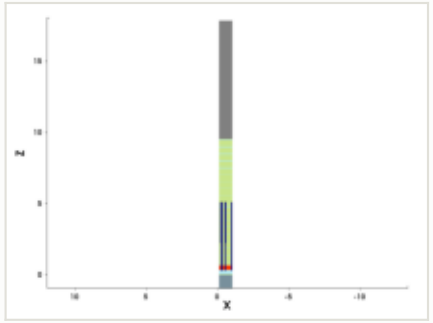

mask for this step

no mask for this step

steps by process area

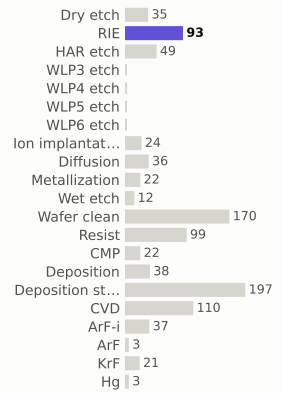

materials deposited (g)

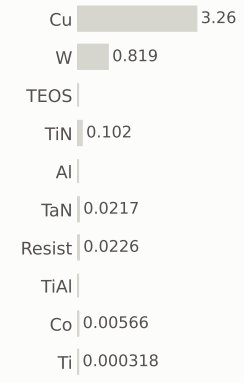

gases emitted (g)

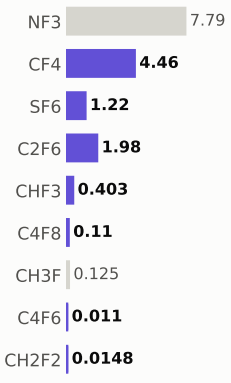

Step #18860: RIE

etch_anisotropic · RIE

1.04	845.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

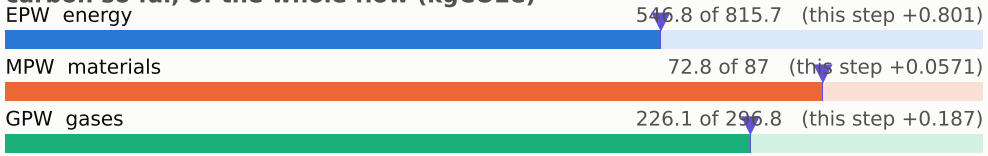

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

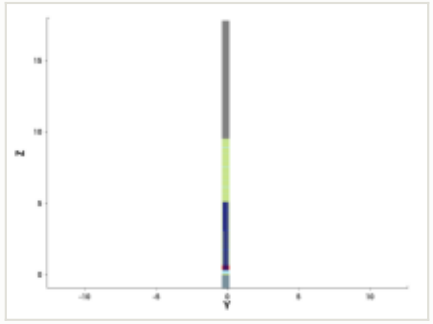

y cut at -0.150 µm

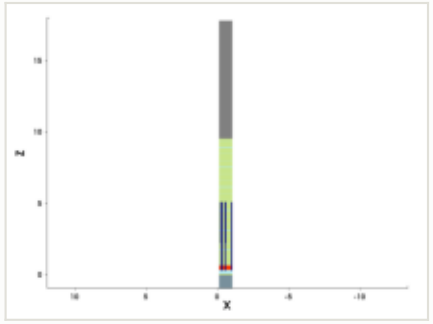

mask for this step

no mask for this step

steps by process area

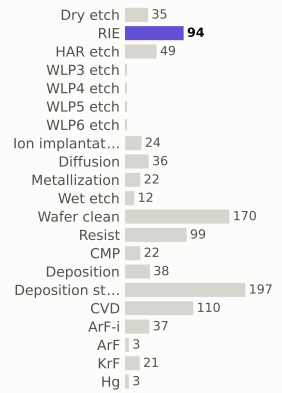

materials deposited (g)

gases emitted (g)

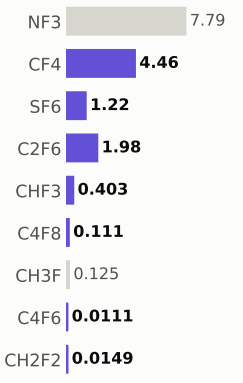

Step #18870: RIE

etch_anisotropic · RIE

1.04	846.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

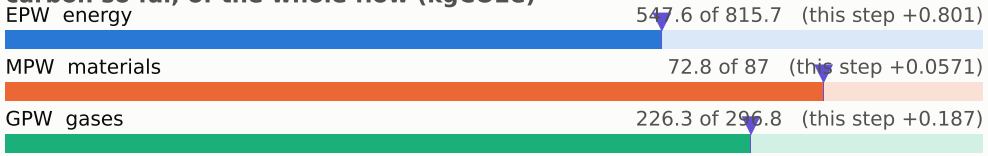

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

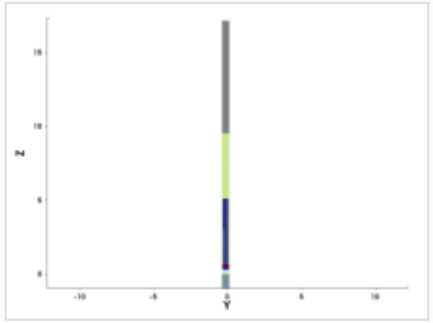

y cut at -0.150 µm

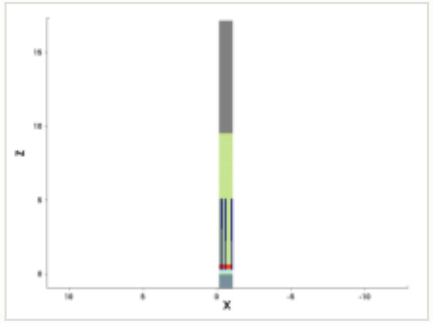

mask for this step

no mask for this step

steps by process area

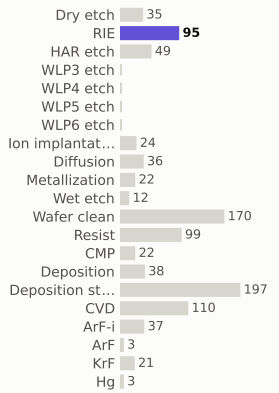

materials deposited (g)

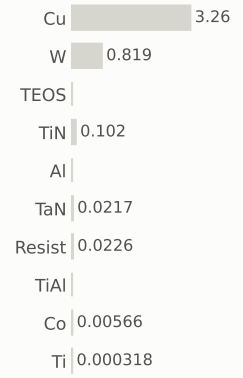

gases emitted (g)

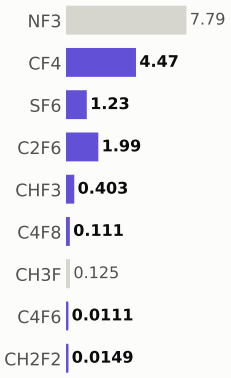

Step #18880: RIE

etch_anisotropic · RIE

1.04	847.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

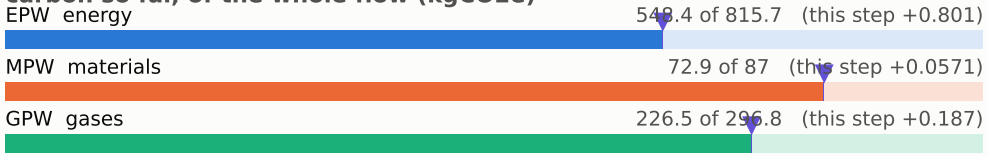

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

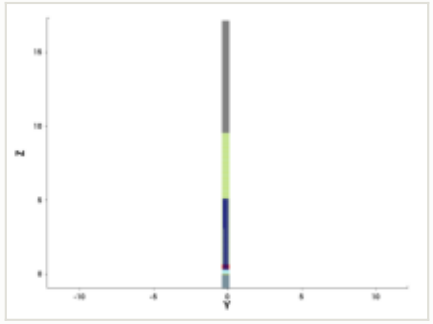

y cut at -0.150 µm

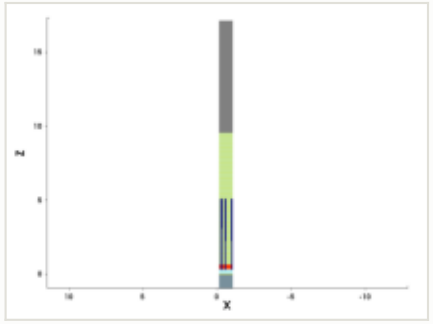

mask for this step

no mask for this step

steps by process area

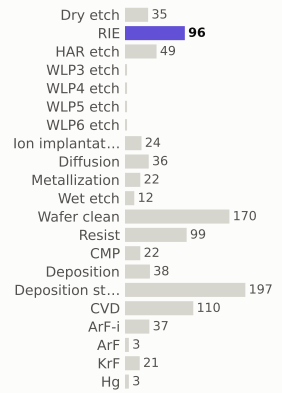

materials deposited (g)

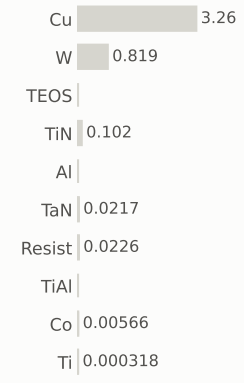

gases emitted (g)

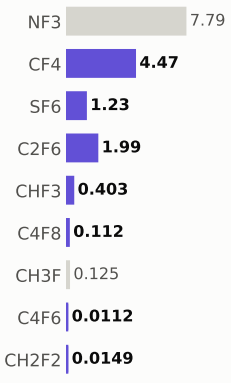

Step #18890: RIE

etch_anisotropic · RIE

1.04	848.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

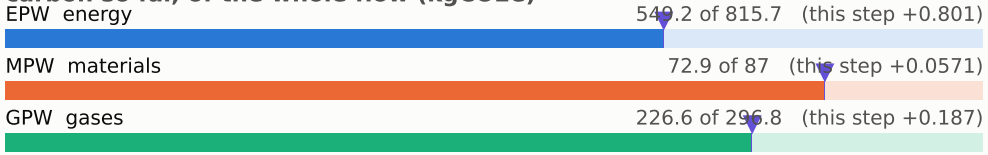

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

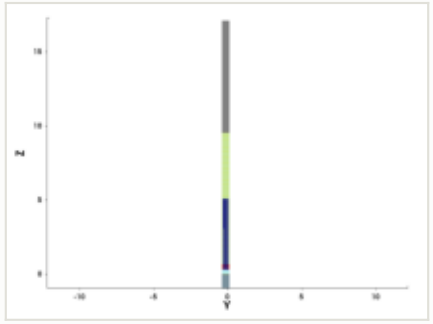

y cut at -0.150 µm

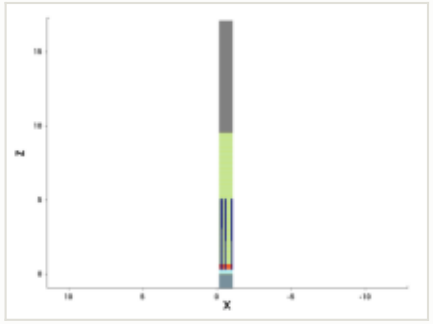

mask for this step

no mask for this step

steps by process area

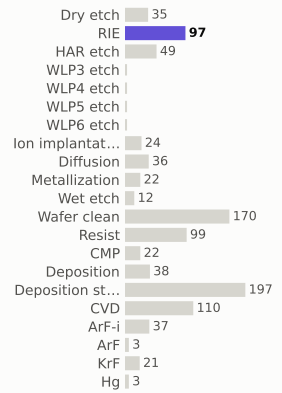

materials deposited (g)

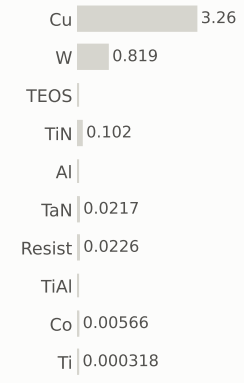

gases emitted (g)

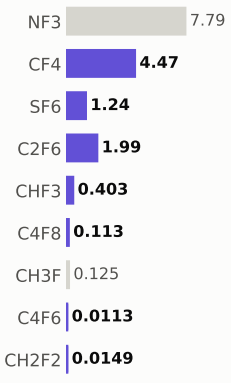

Step #18900: RIE

etch_anisotropic · RIE

1.04	849.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

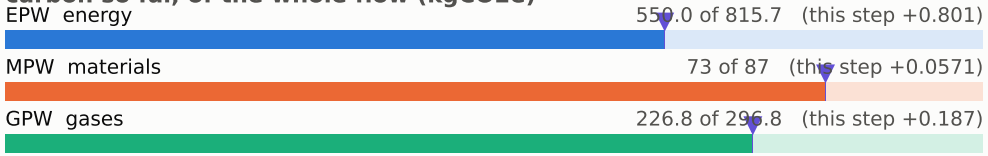

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

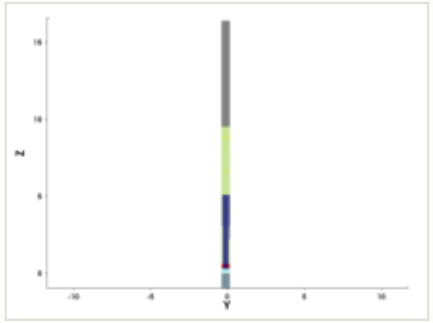

y cut at -0.150 µm

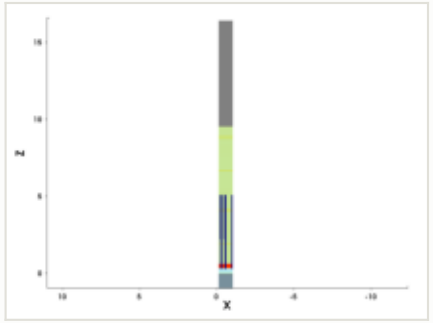

mask for this step

no mask for this step

steps by process area

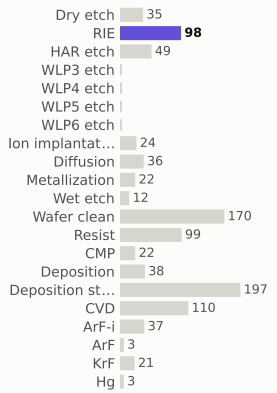

materials deposited (g)

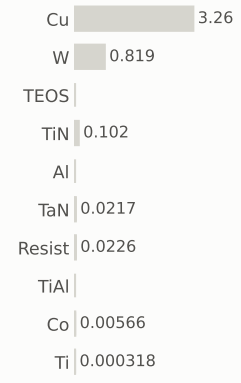

gases emitted (g)

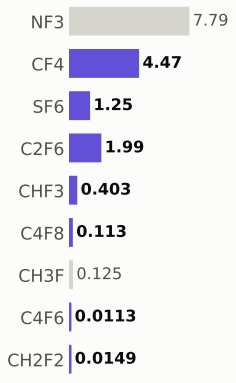

Step #18910: RIE

etch_anisotropic · RIE

1.04	850.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

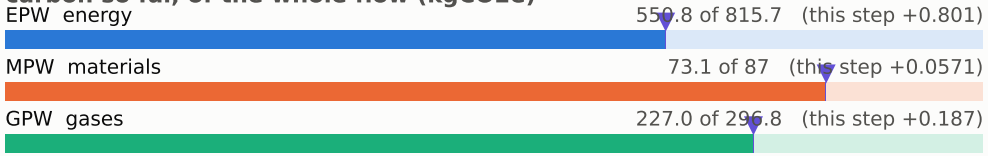

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

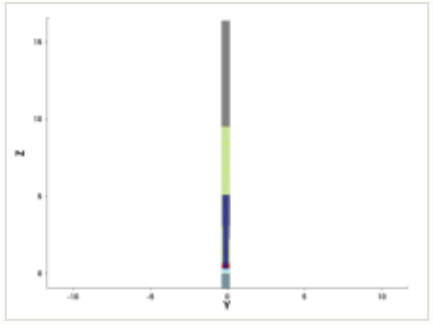

y cut at -0.150 µm

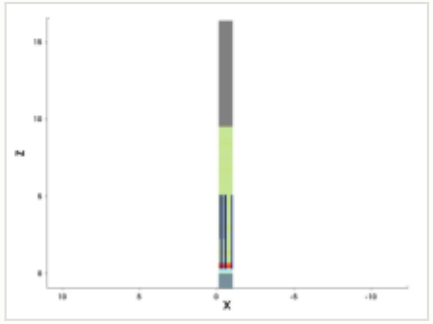

mask for this step

no mask for this step

steps by process area

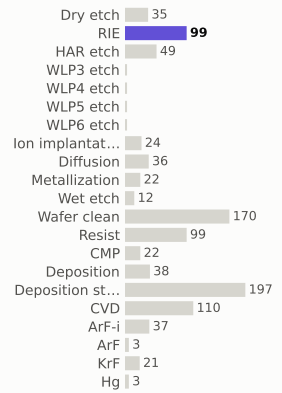

materials deposited (g)

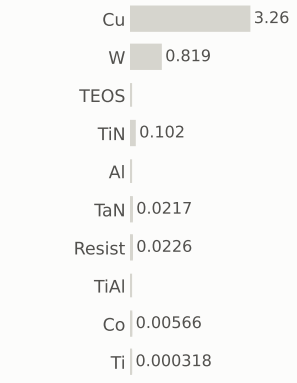

gases emitted (g)

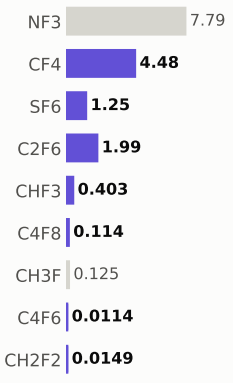

Step #18920: RIE

etch_anisotropic · RIE

1.04	851.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

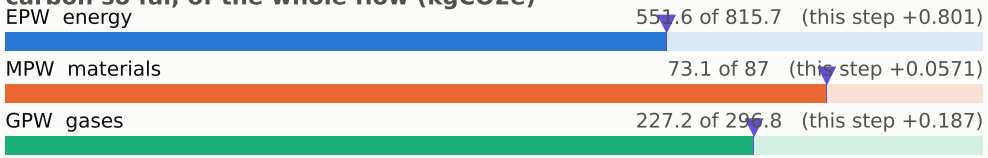

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

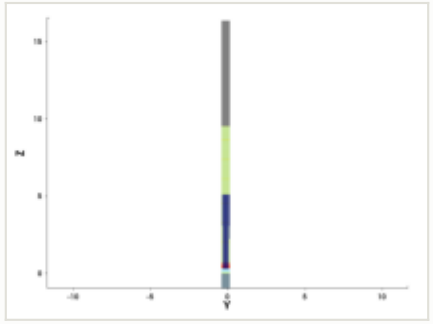

y cut at -0.150 µm

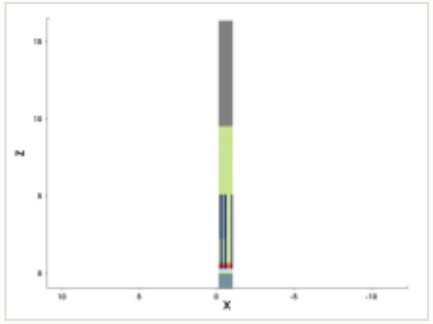

mask for this step

no mask for this step

steps by process area

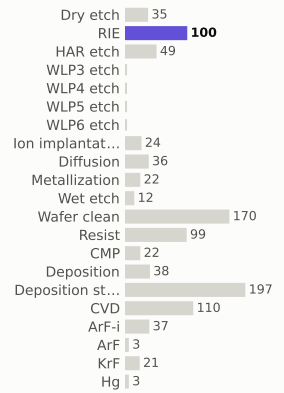

materials deposited (g)

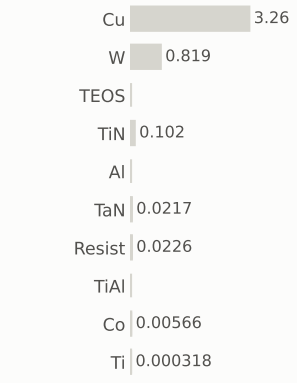

gases emitted (g)

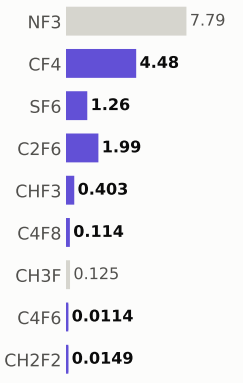

Step #18930: RIE

etch_anisotropic · RIE

1.04	853.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

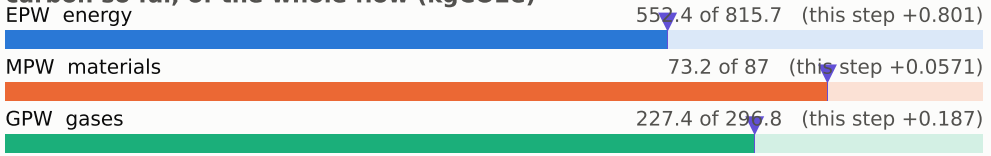

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

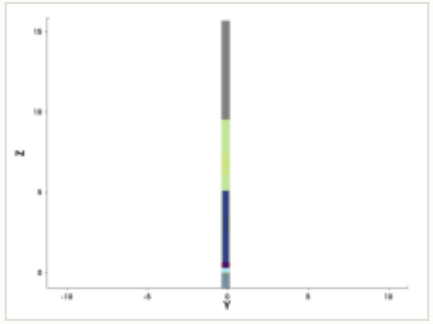

y cut at -0.150 µm

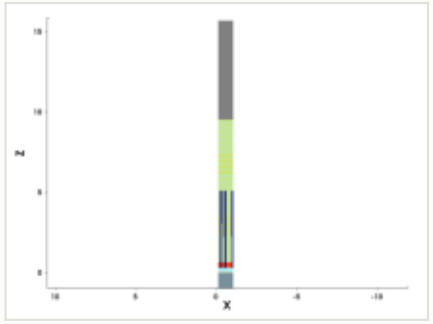

mask for this step

no mask for this step

steps by process area

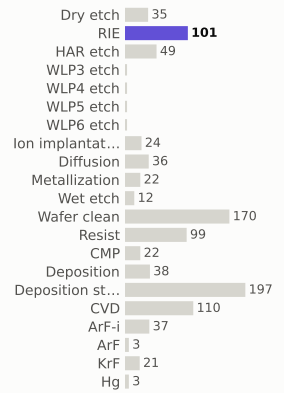

materials deposited (g)

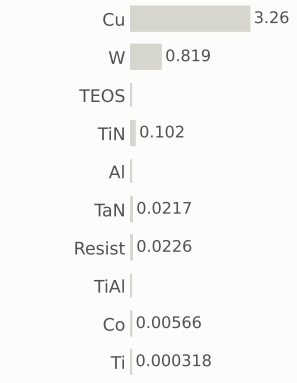

gases emitted (g)

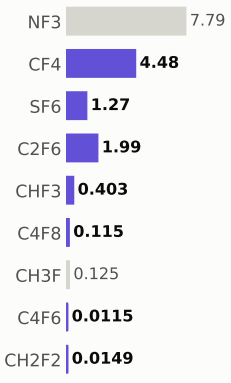

Step #18940: RIE

etch_anisotropic · RIE

1.04	854.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

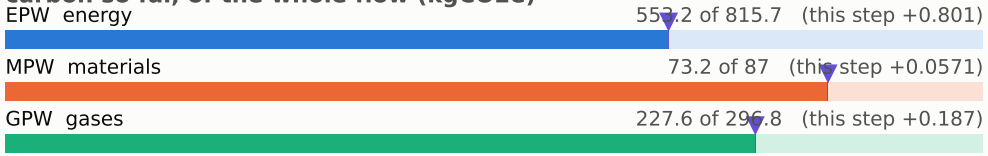

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

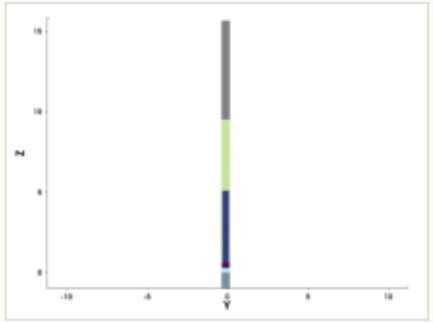

y cut at -0.150 µm

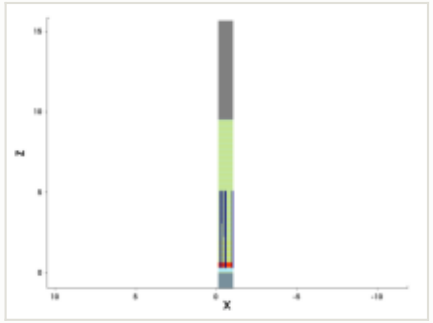

mask for this step

no mask for this step

steps by process area

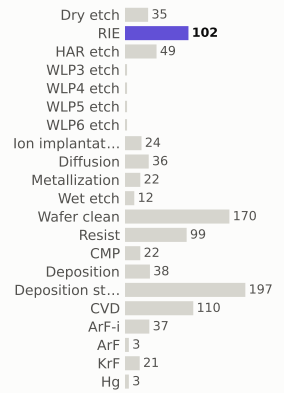

materials deposited (g)

gases emitted (g)

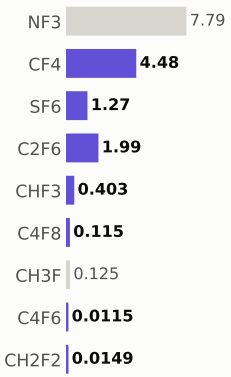

Step #18950: RIE

etch_anisotropic · RIE

1.04	855.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

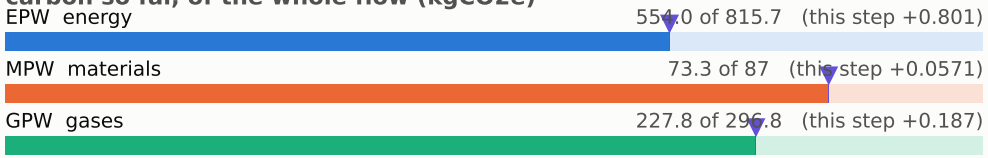

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

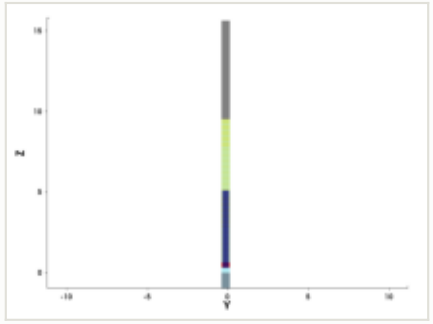

y cut at -0.150 µm

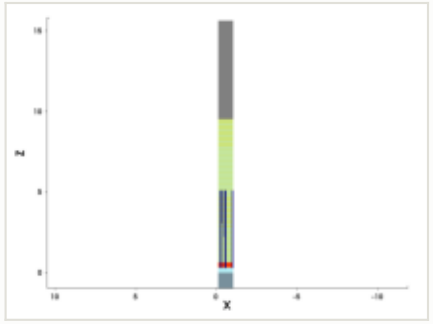

mask for this step

no mask for this step

steps by process area

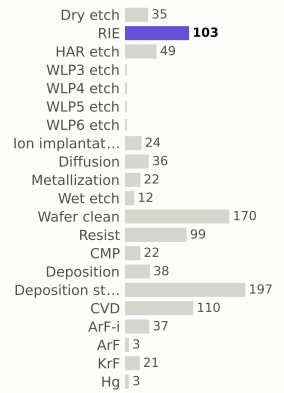

materials deposited (g)

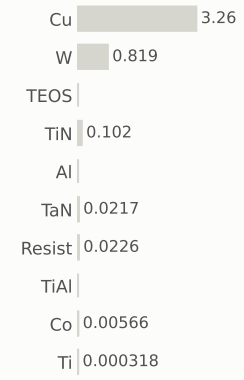

gases emitted (g)

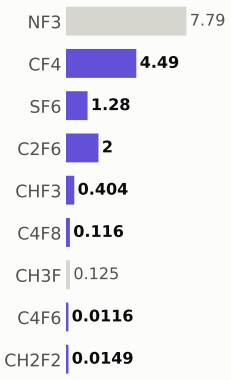

Step #18960: RIE

etch_anisotropic · RIE

1.04	856.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

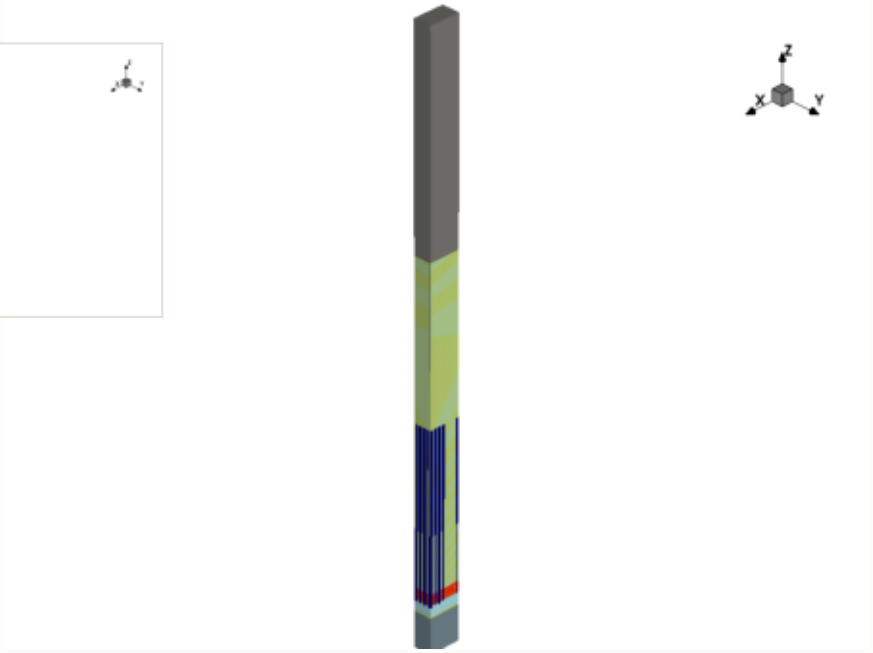

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

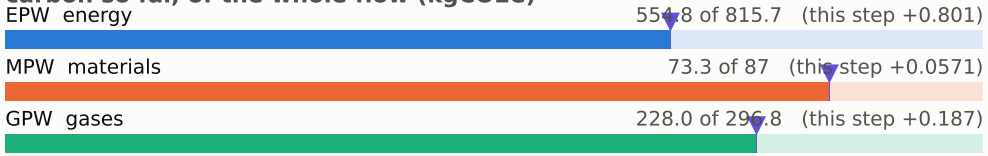

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

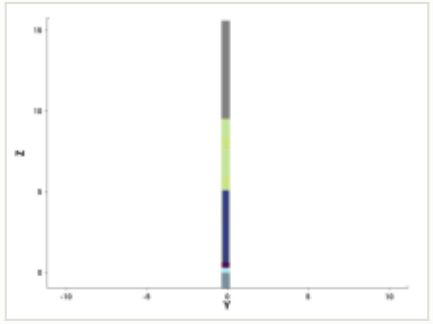

y cut at -0.150 µm

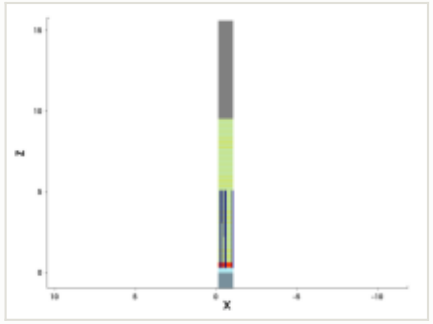

mask for this step

no mask for this step

steps by process area

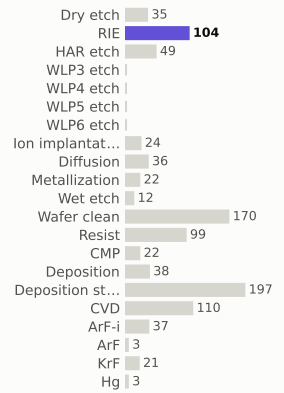

materials deposited (g)

gases emitted (g)

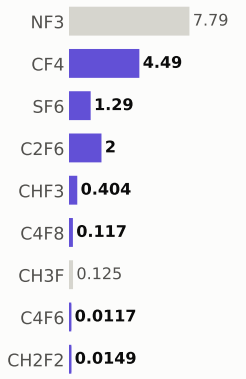

Step #18970: Dry_etch

etch_strip · Dry_etch

0.801	856.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

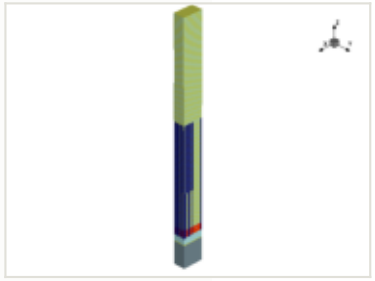

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

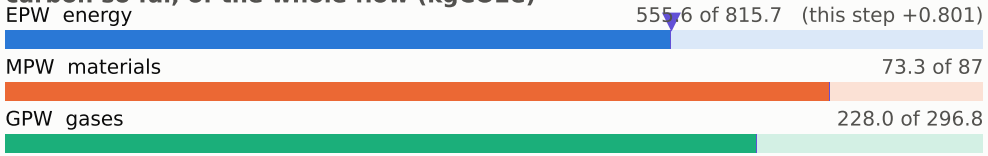

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

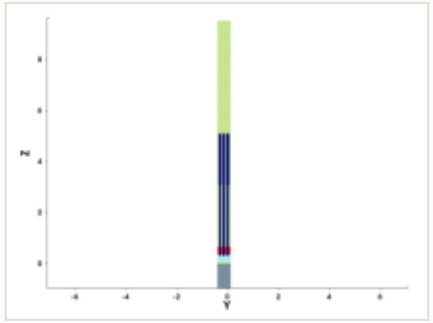

y cut at -0.150 µm

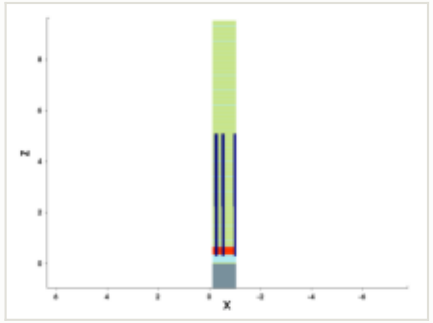

mask for this step

no mask for this step

steps by process area

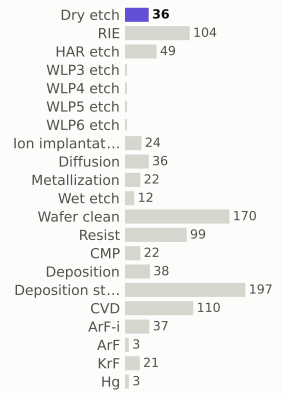

materials deposited (g)

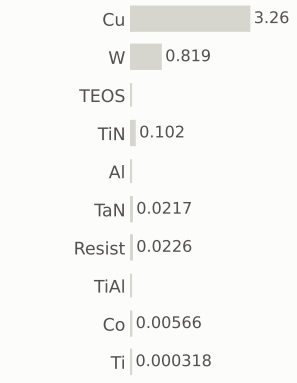

gases emitted (g)

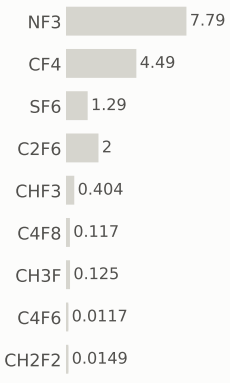

Step #18980: Wafer_clean

clean · Wafer_clean

0.169	857.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

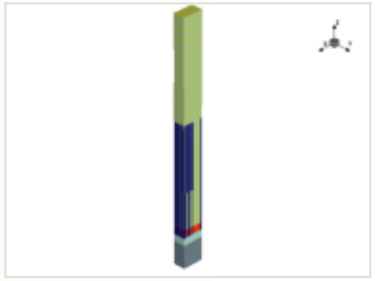

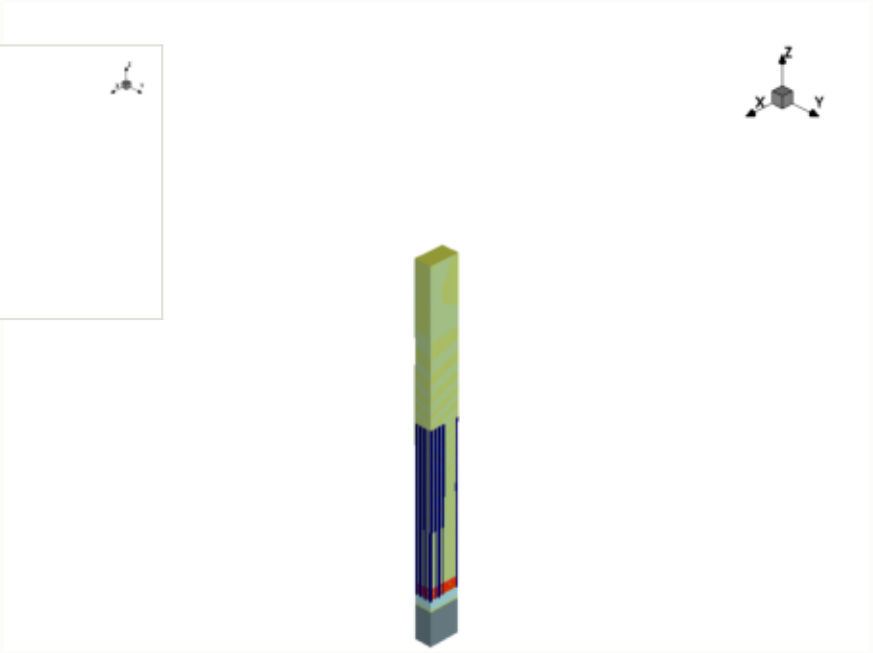

x cut at -0.570 µm

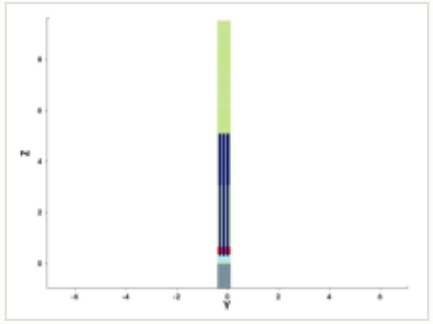

y cut at -0.150 µm

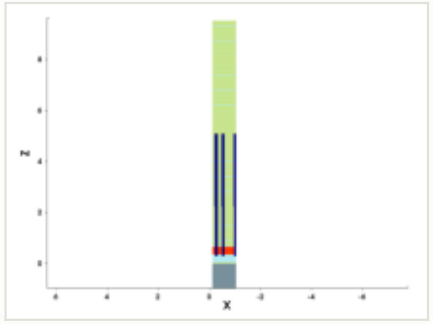

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

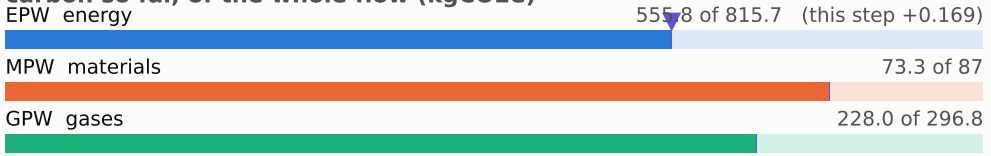

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

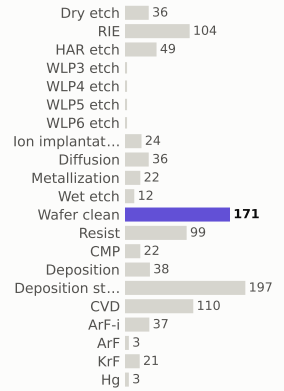

materials deposited (g)

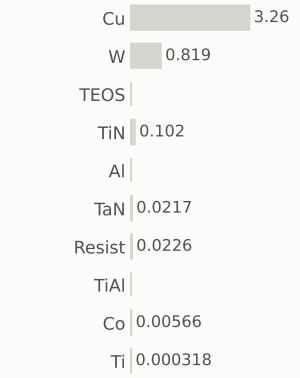

gases emitted (g)

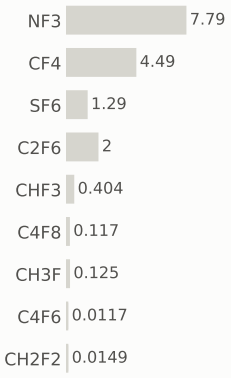

Step #18990: KrF

litho_patterning · KrF

0.199	857.3	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

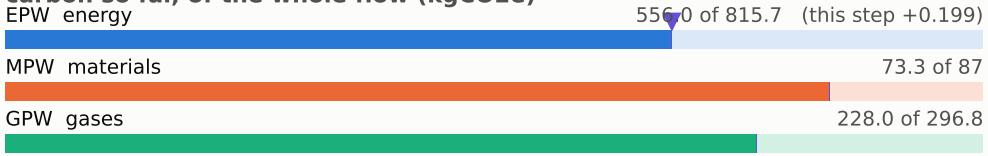

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

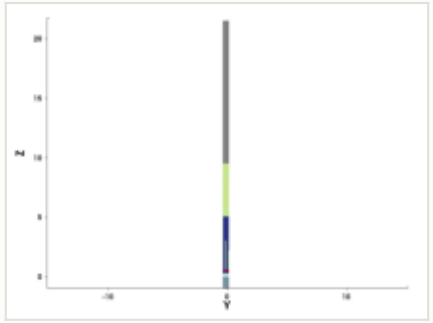

y cut at -0.150 µm

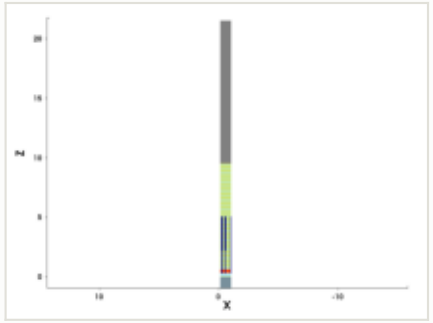

mask: layer 30:0, positive (GDSII)

steps by process area

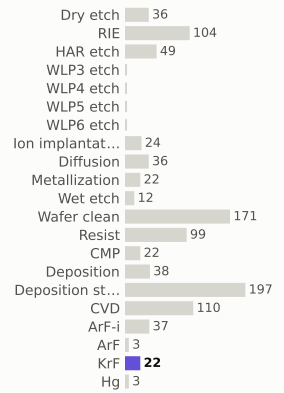

materials deposited (g)

gases emitted (g)

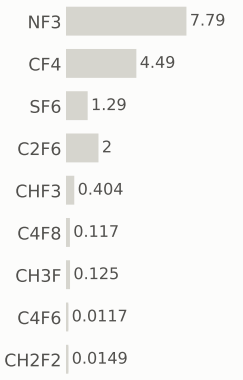

Step #19000: RIE

etch_anisotropic · RIE

1.04	858.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

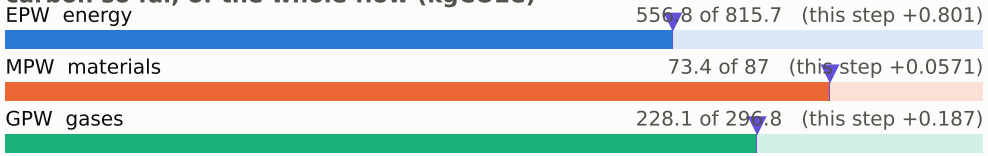

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

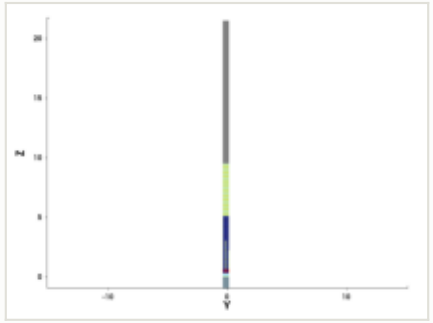

y cut at -0.150 µm

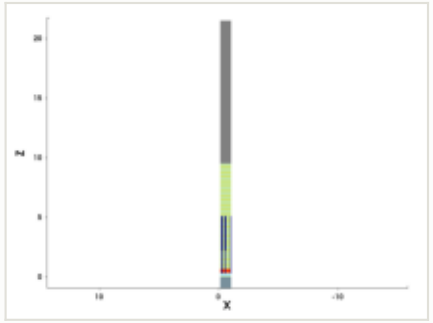

mask for this step

no mask for this step

steps by process area

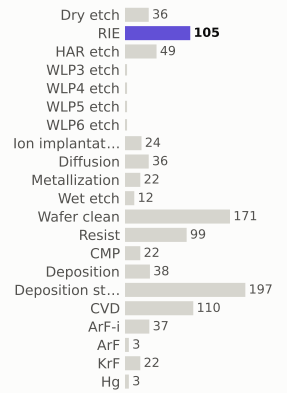

materials deposited (g)

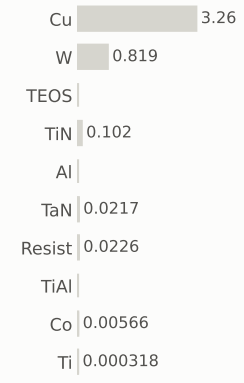

gases emitted (g)

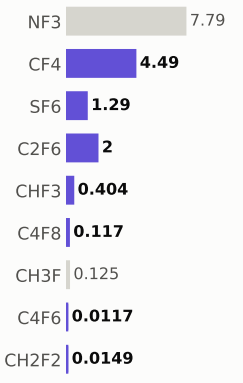

Step #19010: RIE

etch_anisotropic · RIE

1.04	859.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

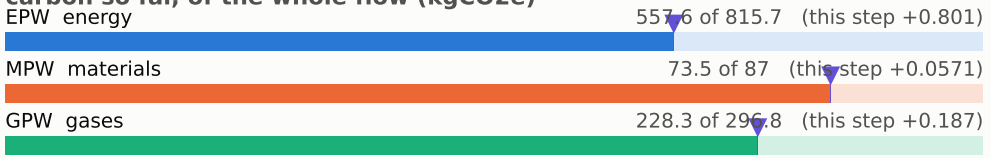

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

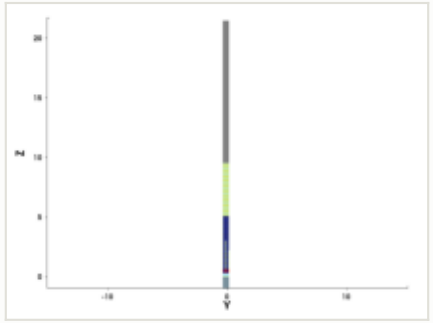

y cut at -0.150 µm

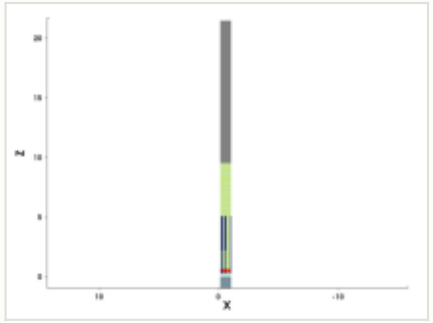

mask for this step

no mask for this step

steps by process area

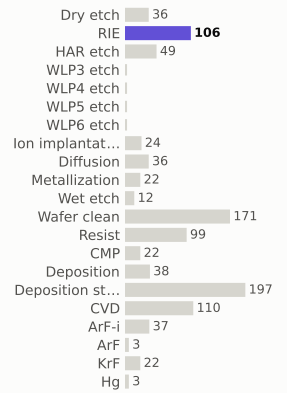

materials deposited (g)



gases emitted (g)

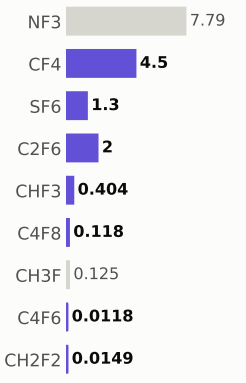

Step #19020: RIE

etch_anisotropic · RIE

1.04	860.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

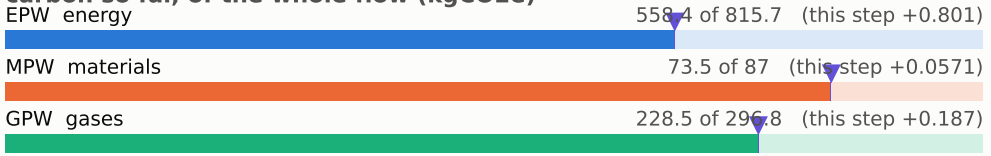

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

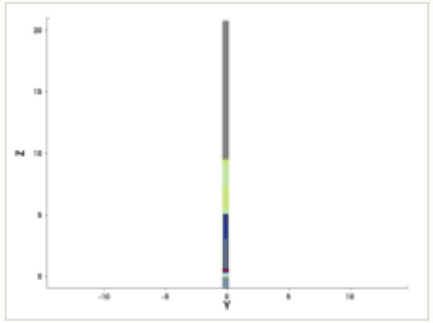

y cut at -0.150 µm

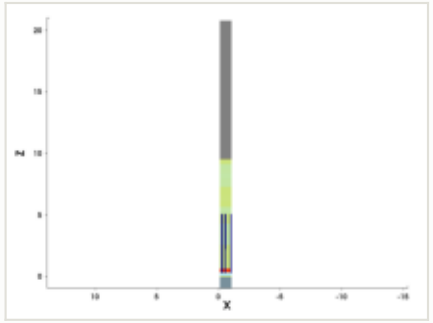

mask for this step

no mask for this step

steps by process area

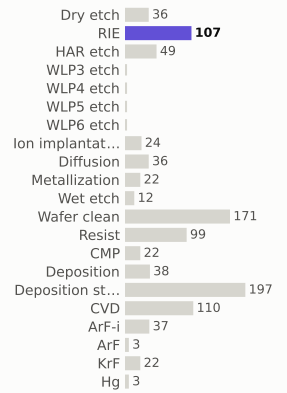

materials deposited (g)

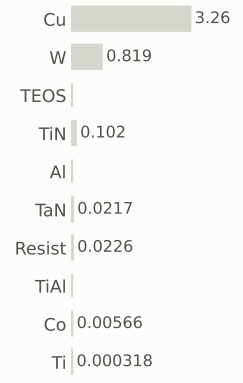

gases emitted (g)



Step #19030: RIE

etch_anisotropic · RIE

1.04	861.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

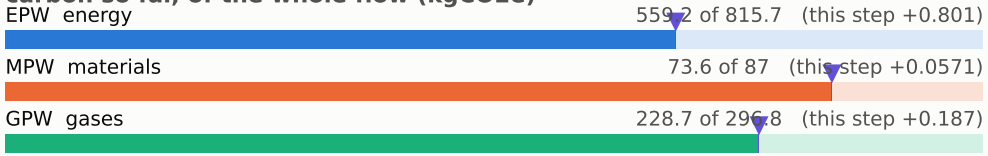

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

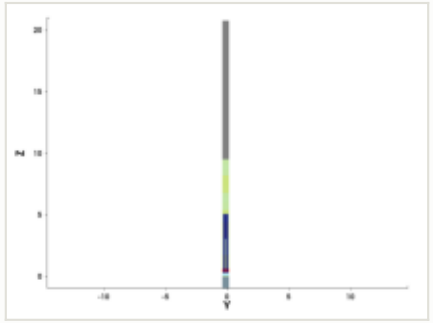

y cut at -0.150 µm

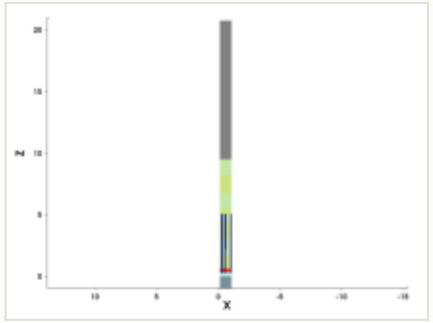

mask for this step

no mask for this step

steps by process area

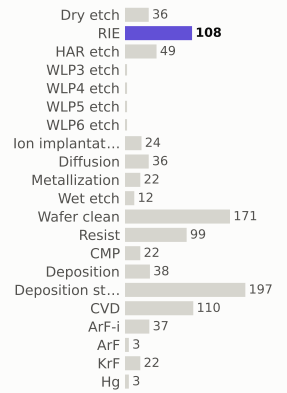

materials deposited (g)

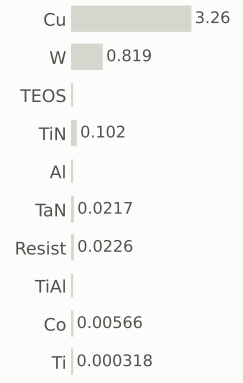

gases emitted (g)

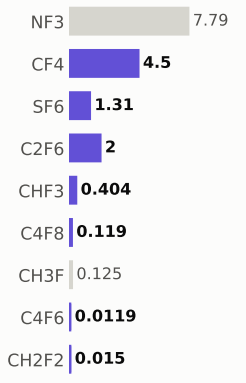

Step #19040: RIE

etch_anisotropic · RIE

1.04	862.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

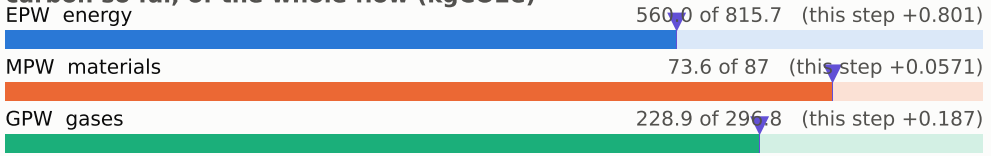

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

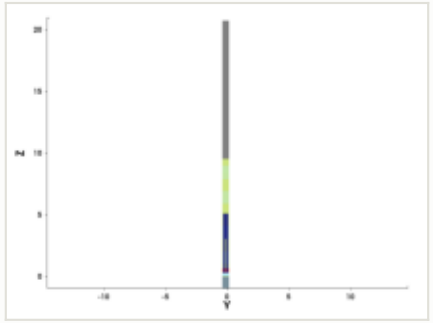

y cut at -0.150 µm

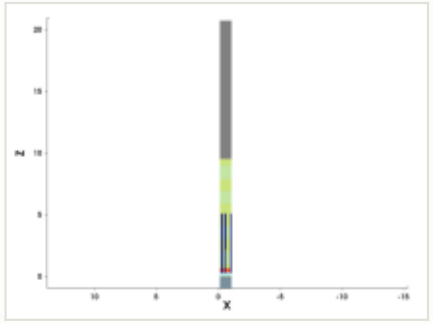

mask for this step

no mask for this step

steps by process area

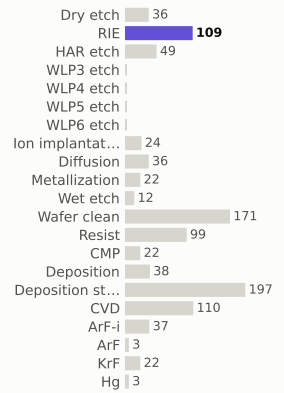

materials deposited (g)

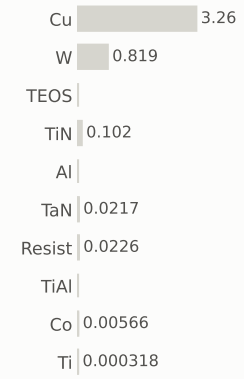

gases emitted (g)

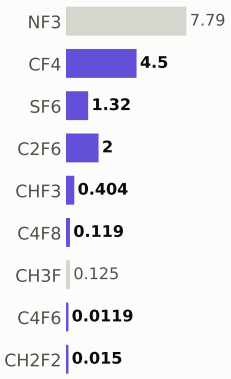

Step #19050: RIE

etch_anisotropic · RIE

1.04	863.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

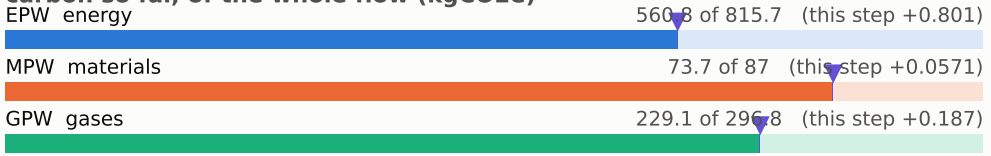

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

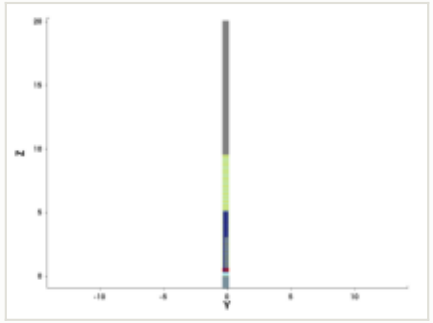

y cut at -0.150 µm

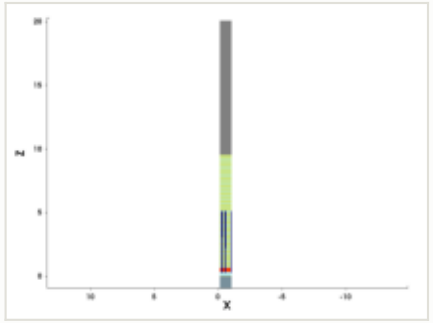

mask for this step

no mask for this step

steps by process area

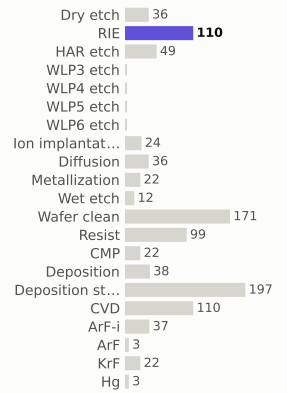

materials deposited (g)

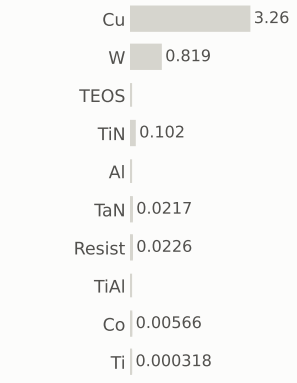

gases emitted (g)

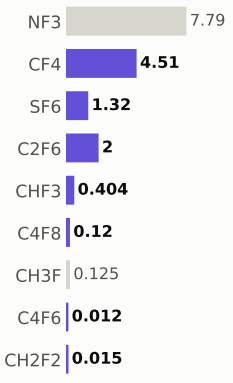

Step #19060: RIE

etch_anisotropic · RIE

1.04	864.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

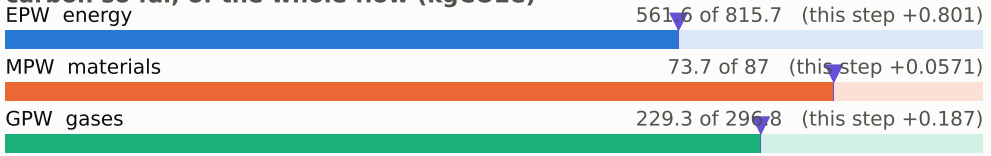

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

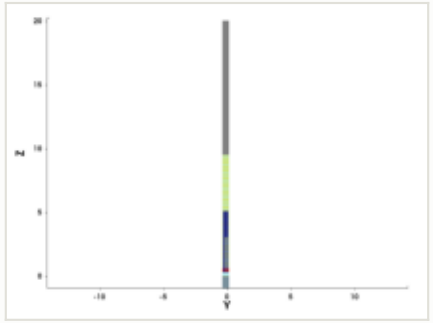

y cut at -0.150 µm

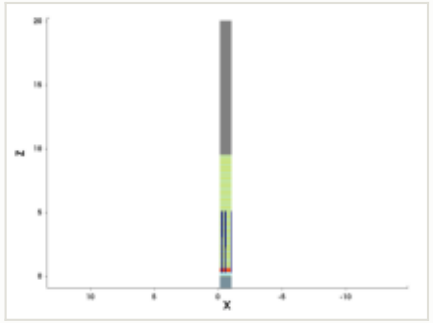

mask for this step

no mask for this step

steps by process area

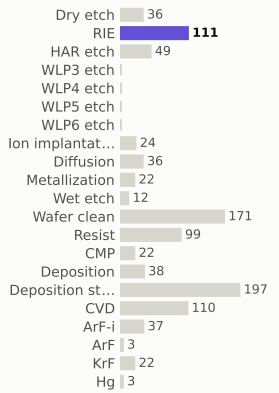

materials deposited (g)

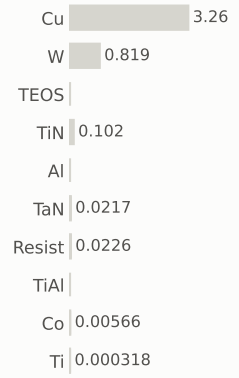

gases emitted (g)

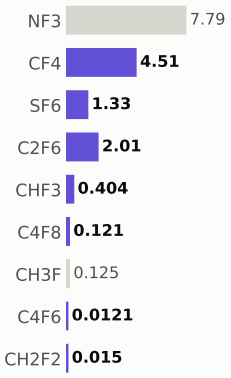

Step #19070: RIE

etch_anisotropic · RIE

1.04	865.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

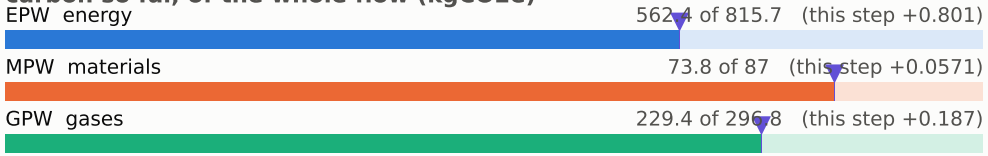

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

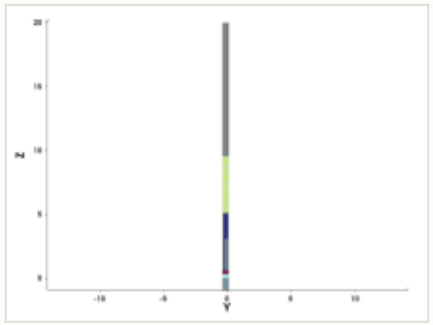

y cut at -0.150 µm

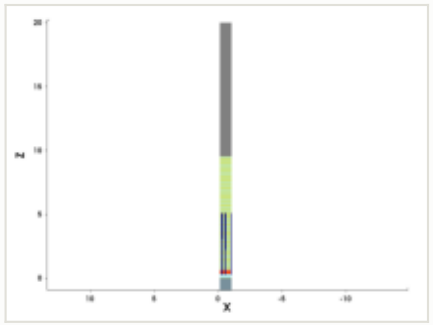

mask for this step

no mask for this step

steps by process area

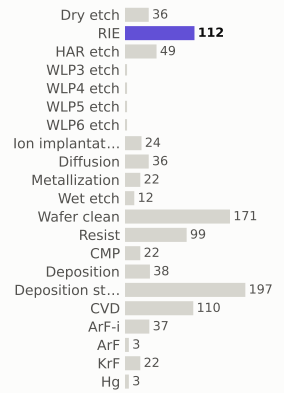

materials deposited (g)

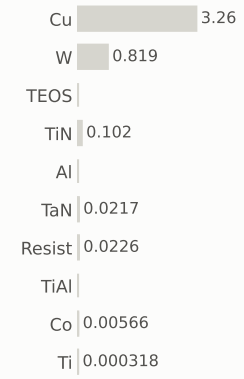

gases emitted (g)



Step #19080: RIE

etch_anisotropic · RIE

1.04	866.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

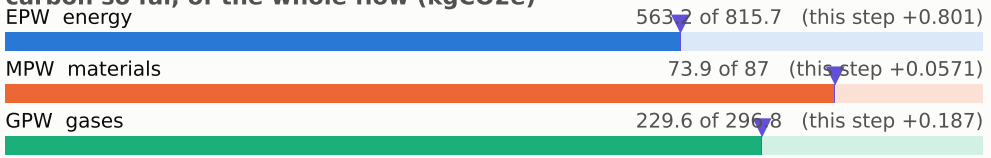

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

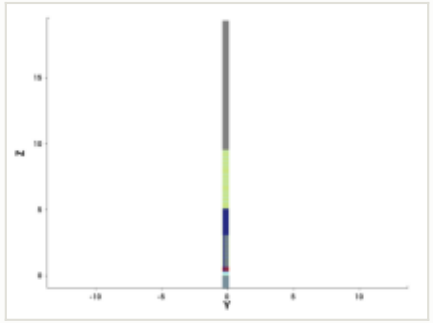

y cut at -0.150 µm

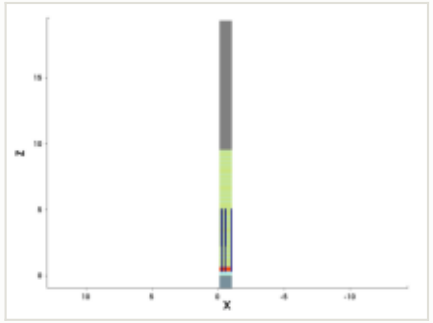

mask for this step

no mask for this step

steps by process area

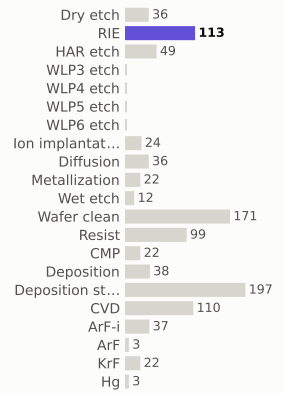

materials deposited (g)

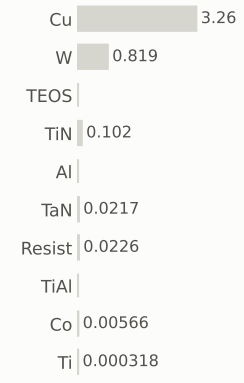

gases emitted (g)

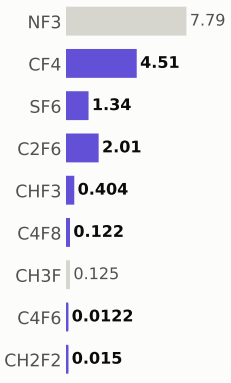

Step #19090: RIE

etch_anisotropic · RIE

1.04	867.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

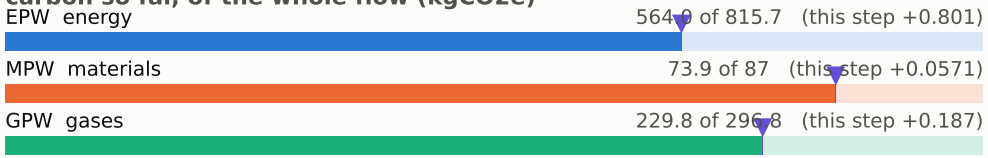

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

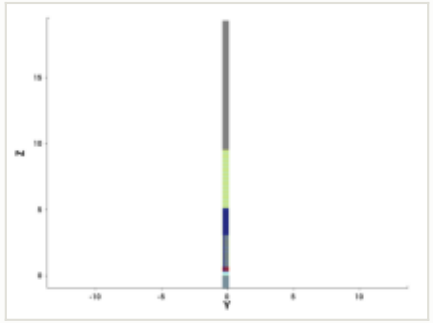

y cut at -0.150 µm

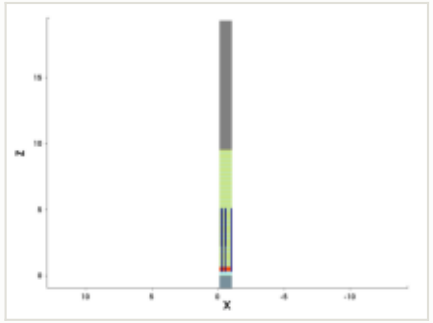

mask for this step

no mask for this step

steps by process area

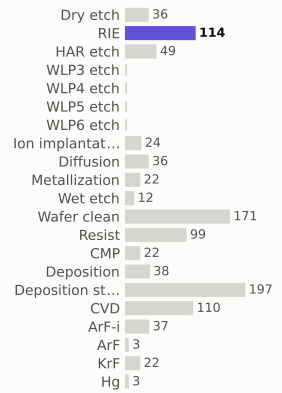

materials deposited (g)

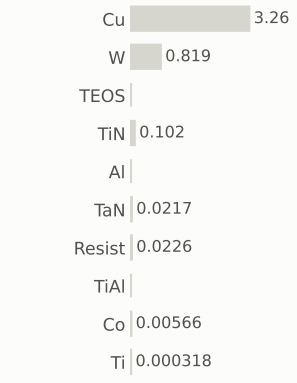

gases emitted (g)

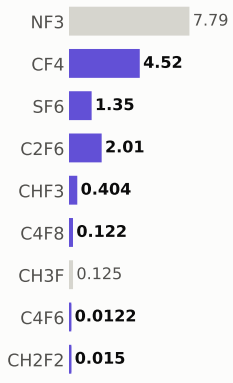

Step #19100: RIE

etch_anisotropic · RIE

1.04	868.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

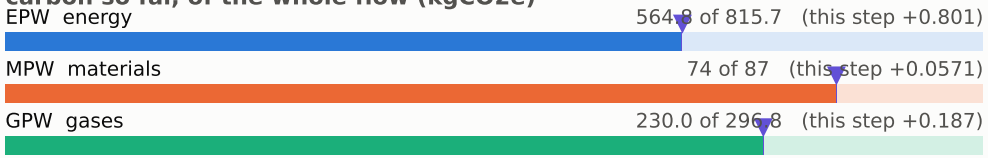

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

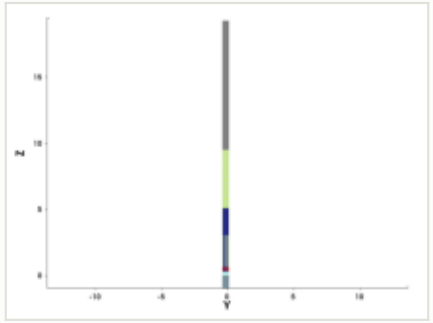

y cut at -0.150 µm

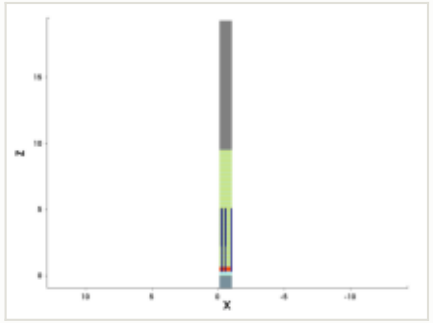

mask for this step

no mask for this step

steps by process area

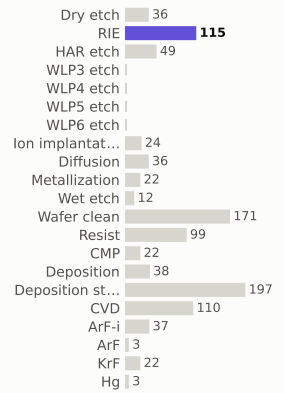

materials deposited (g)

gases emitted (g)

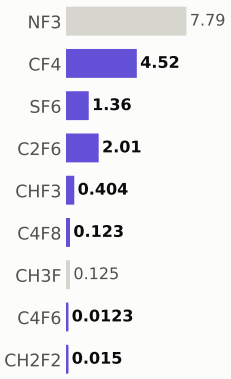

Step #19110: RIE

etch_anisotropic · RIE

1.04	869.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

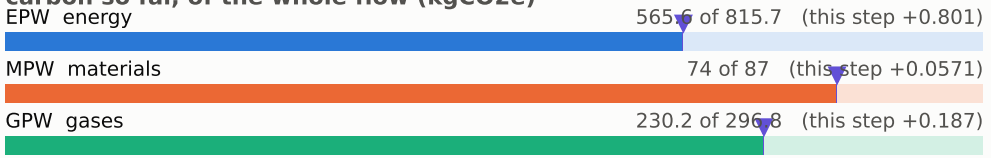

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

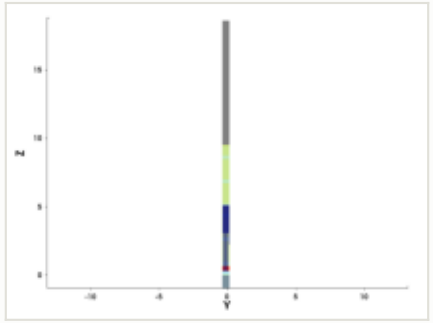

y cut at -0.150 µm

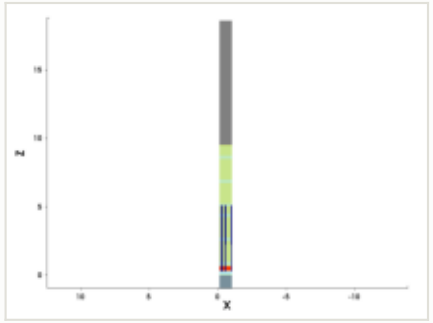

mask for this step

no mask for this step

steps by process area

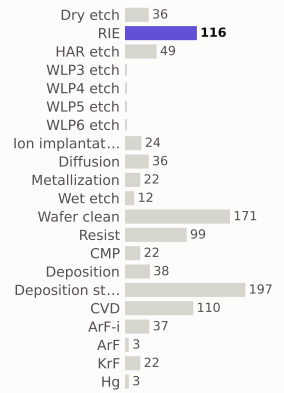

materials deposited (g)

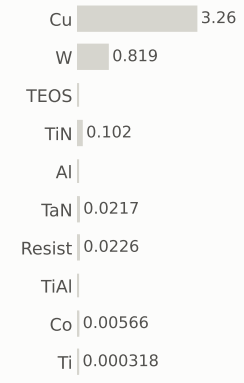

gases emitted (g)

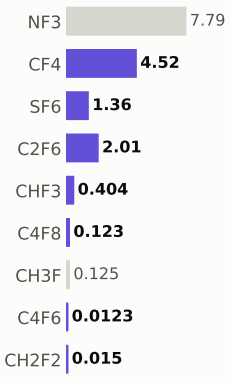

Step #19120: RIE

etch_anisotropic · RIE

1.04	870.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

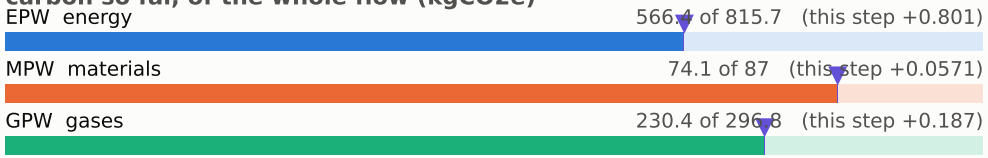

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

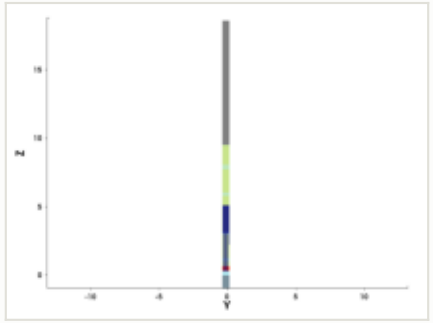

y cut at -0.150 µm

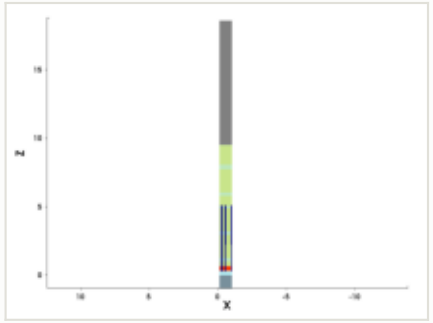

mask for this step

no mask for this step

steps by process area

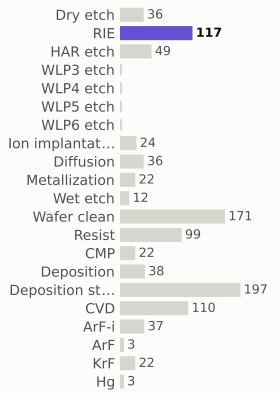

materials deposited (g)

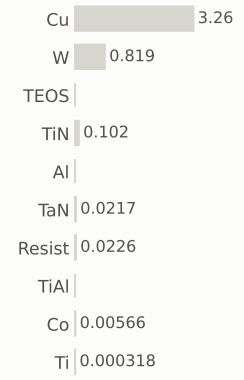

gases emitted (g)

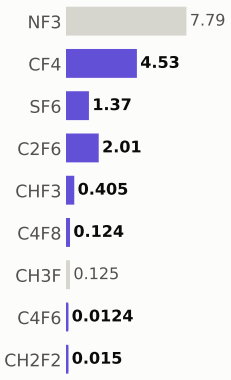

Step #19130: RIE

etch_anisotropic · RIE

1.04	871.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

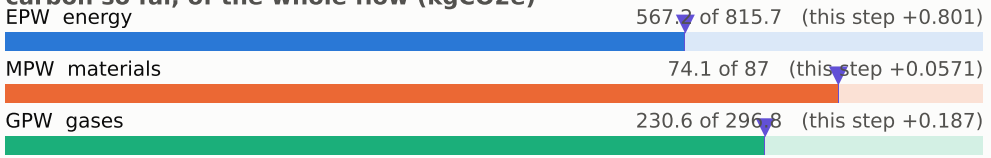

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

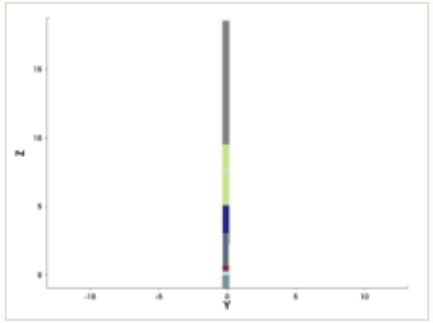

y cut at -0.150 µm

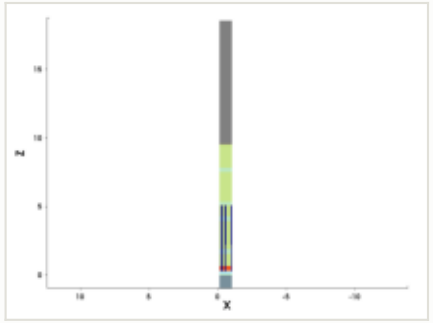

mask for this step

no mask for this step

steps by process area

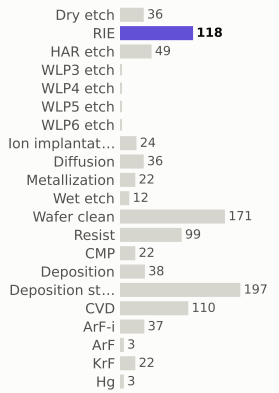

materials deposited (g)

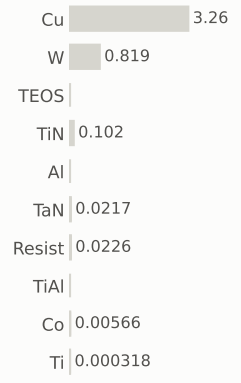

gases emitted (g)

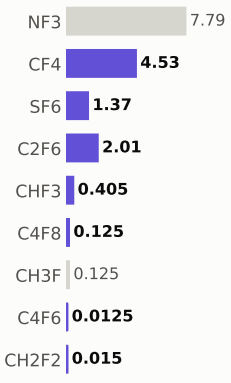

Step #19140: RIE

etch_anisotropic · RIE

1.04	872.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

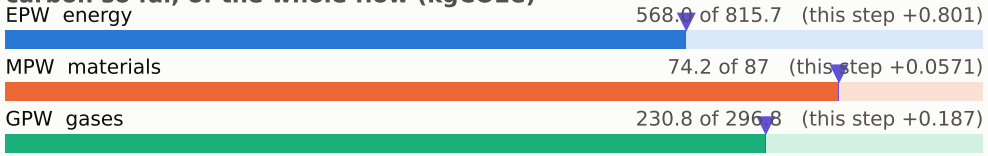

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

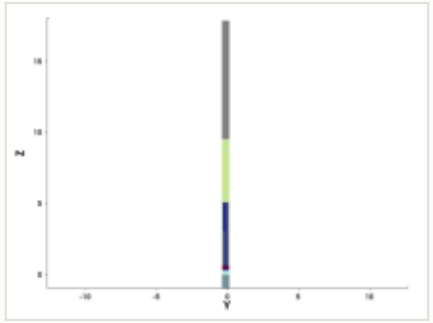

y cut at -0.150 µm

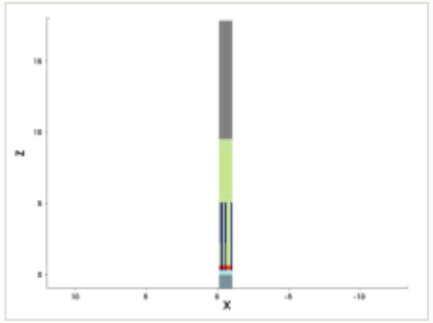

mask for this step

no mask for this step

steps by process area

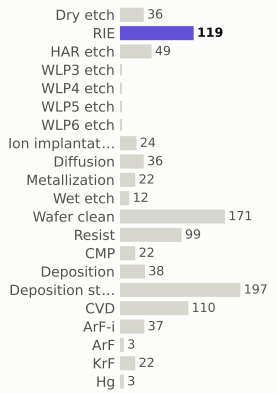

materials deposited (g)

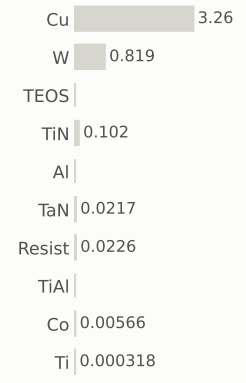

gases emitted (g)

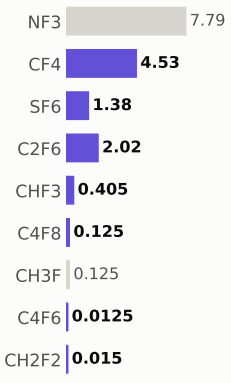

Step #19150: RIE

etch_anisotropic · RIE

1.04	874.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

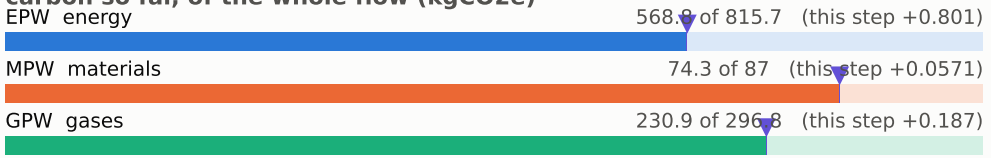

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

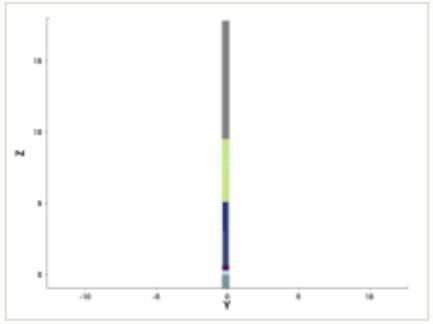

y cut at -0.150 µm

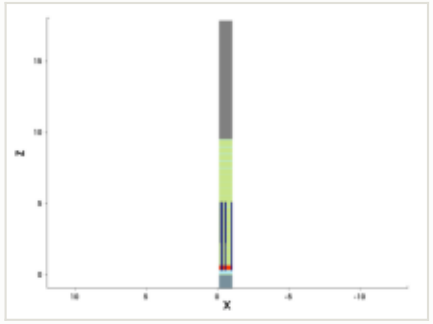

mask for this step

no mask for this step

steps by process area

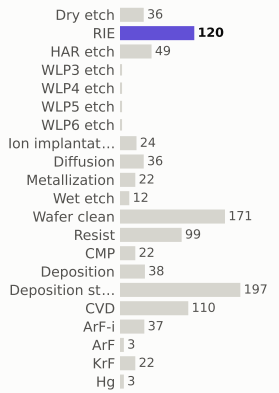

materials deposited (g)

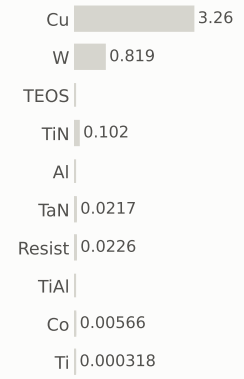

gases emitted (g)

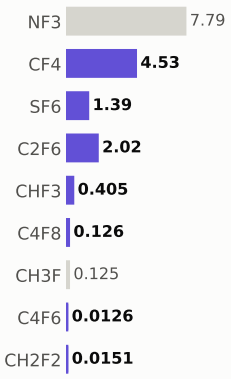

Step #19160: RIE

etch_anisotropic · RIE

1.04	875.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

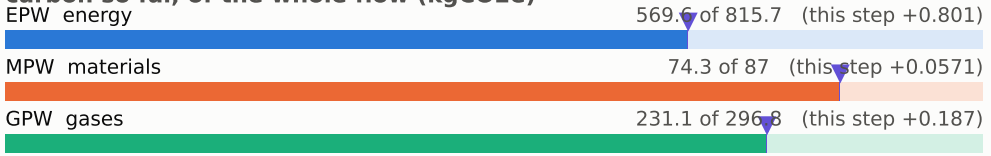

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

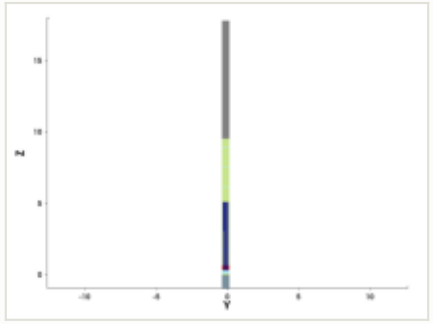

y cut at -0.150 µm

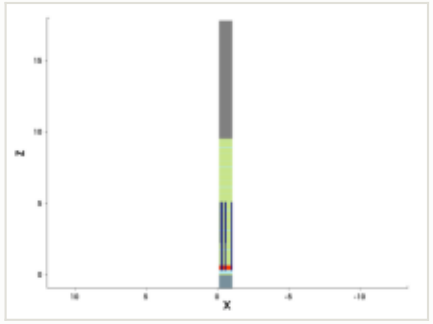

mask for this step

no mask for this step

steps by process area

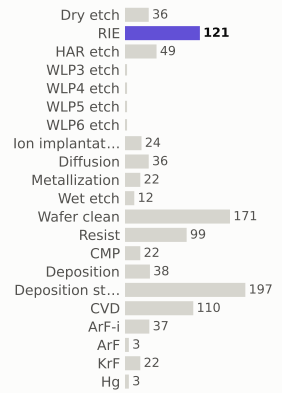

materials deposited (g)

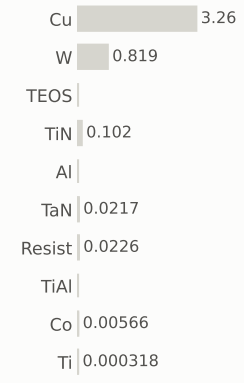

gases emitted (g)

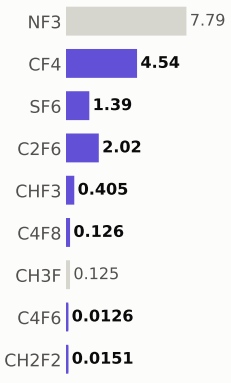

Step #19170: RIE

etch_anisotropic · RIE

1.04	876.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

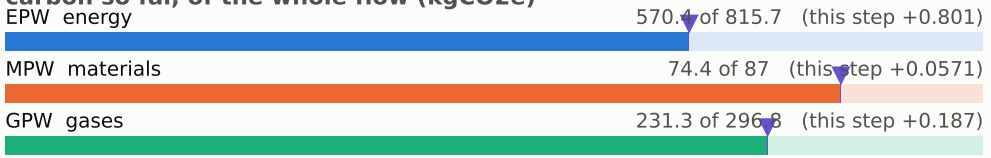

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

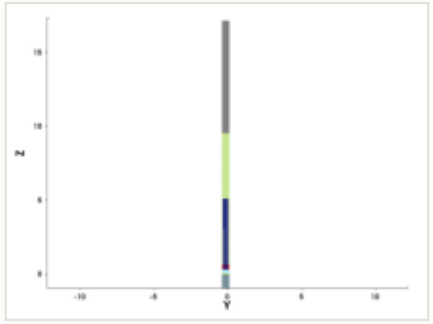

y cut at -0.150 µm

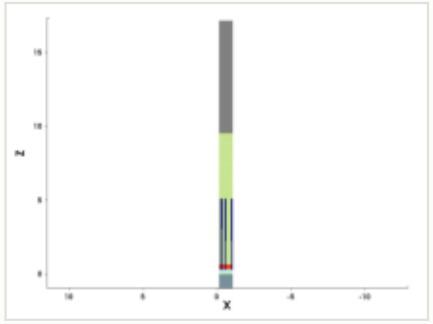

mask for this step

no mask for this step

steps by process area

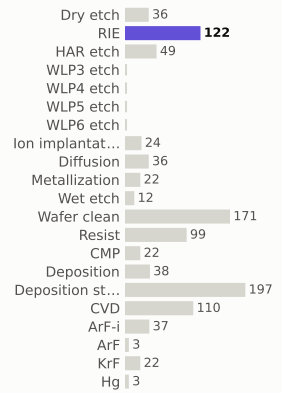

materials deposited (g)

gases emitted (g)

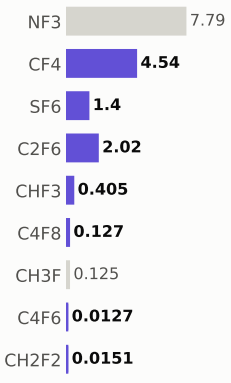

Step #19180: RIE

etch_anisotropic · RIE

1.04	877.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

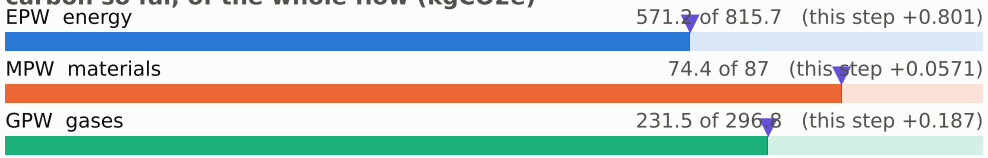

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

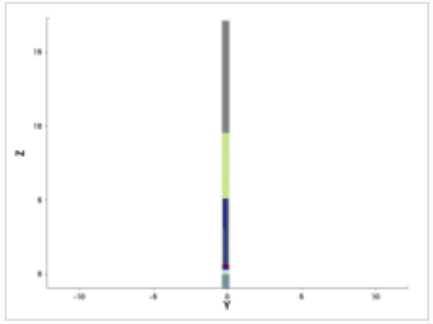

y cut at -0.150 µm

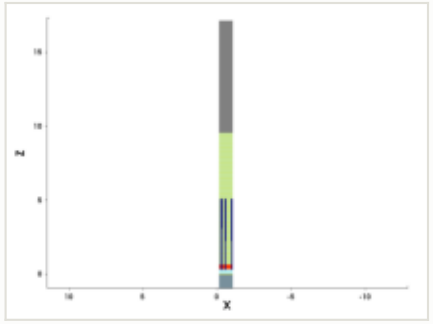

mask for this step

no mask for this step

steps by process area

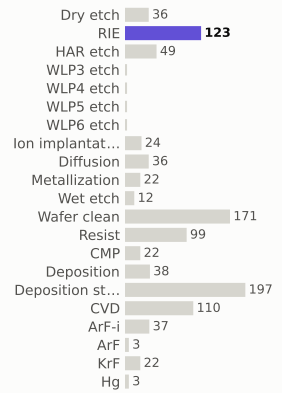

materials deposited (g)

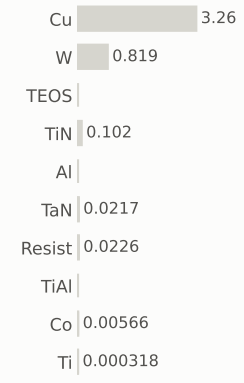

gases emitted (g)

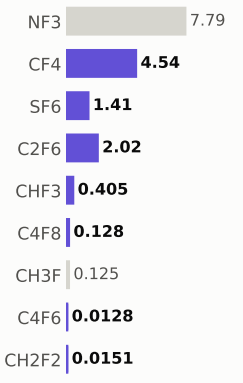

Step #19190: RIE

etch_anisotropic · RIE

1.04	878.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

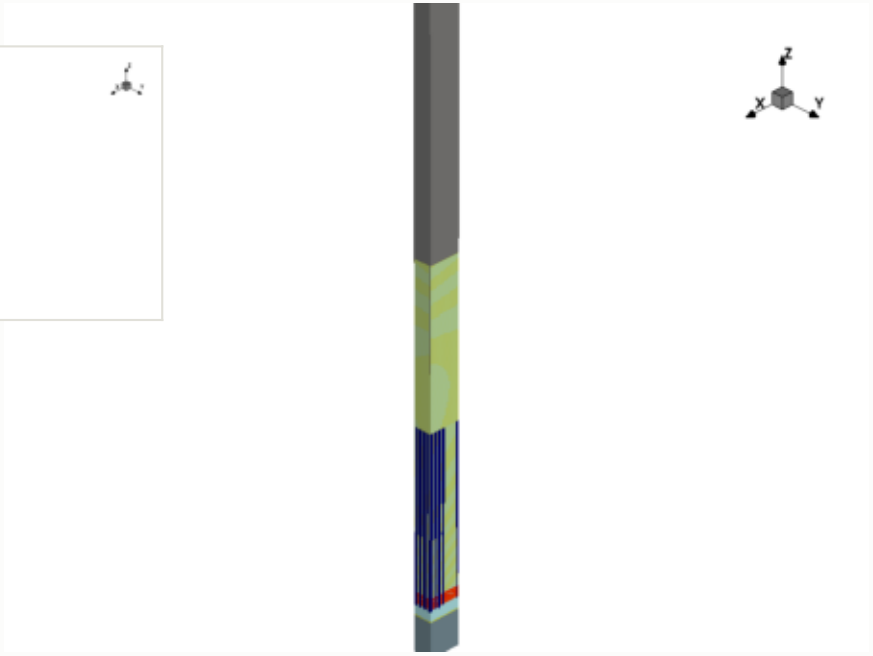

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

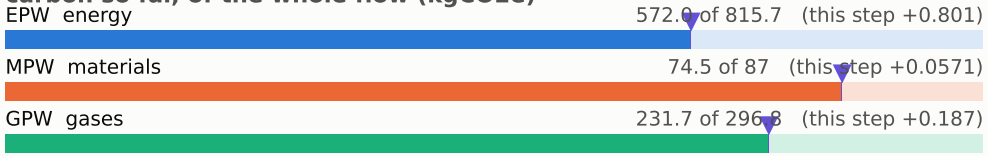

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

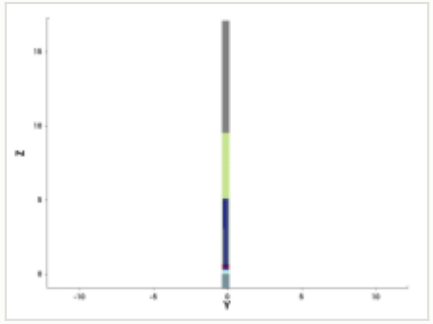

y cut at -0.150 µm

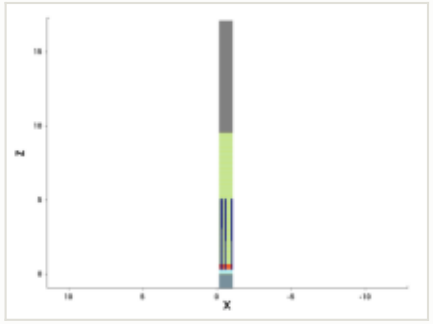

mask for this step

no mask for this step

steps by process area

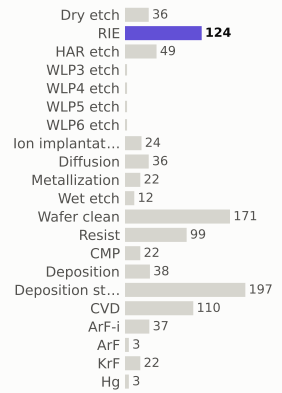

materials deposited (g)

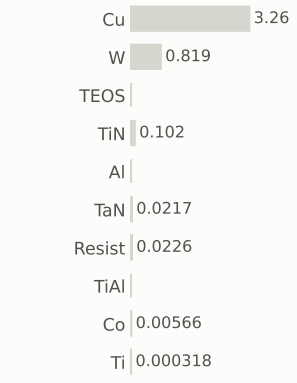

gases emitted (g)

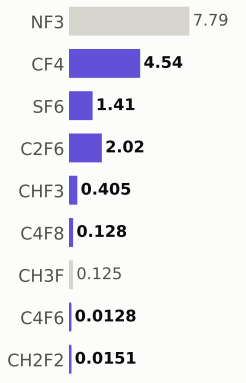

Step #19200: RIE

etch_anisotropic · RIE

1.04	879.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

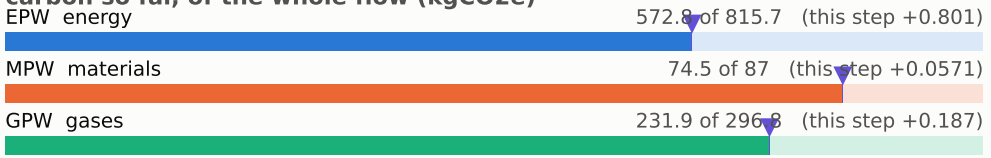

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

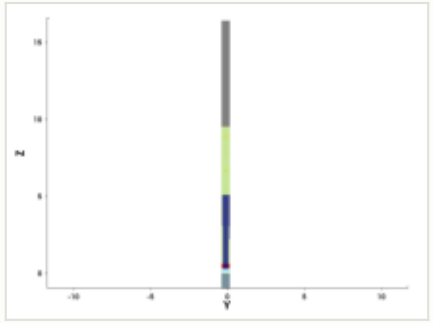

y cut at -0.150 µm

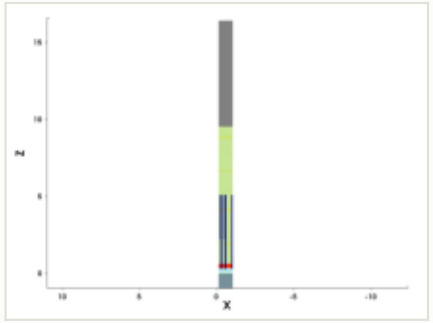

mask for this step

no mask for this step

steps by process area

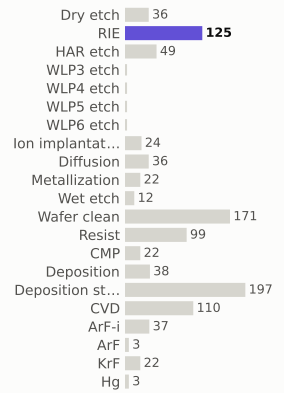

materials deposited (g)

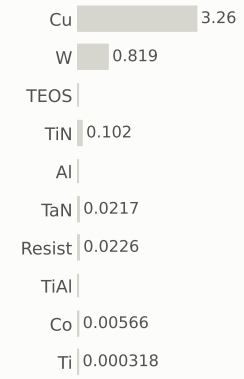

gases emitted (g)

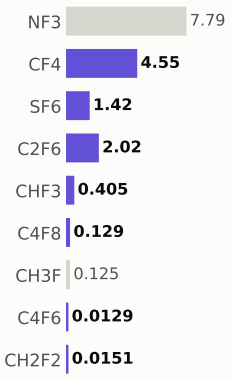

Step #19210: RIE

etch_anisotropic · RIE

1.04	880.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

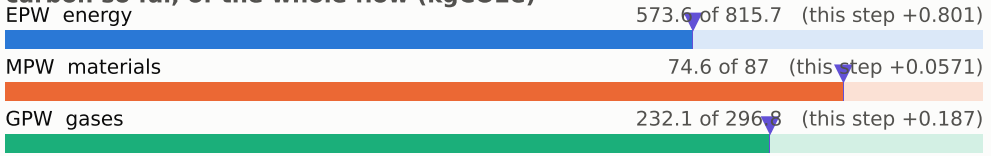

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

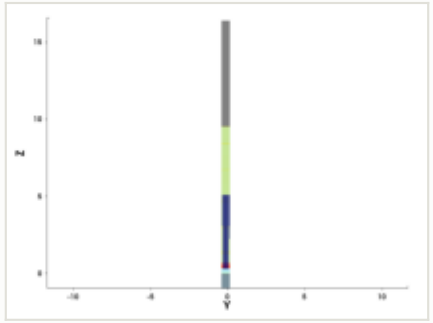

y cut at -0.150 µm

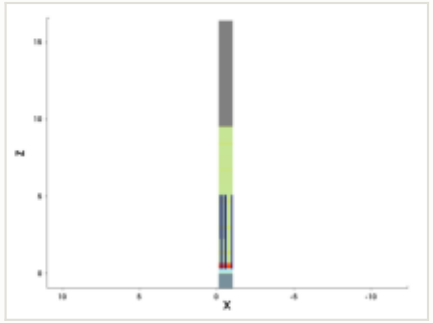

mask for this step

no mask for this step

steps by process area

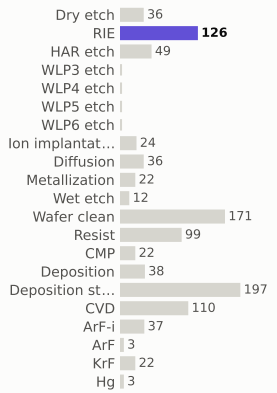

materials deposited (g)

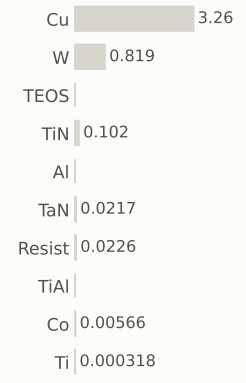

gases emitted (g)

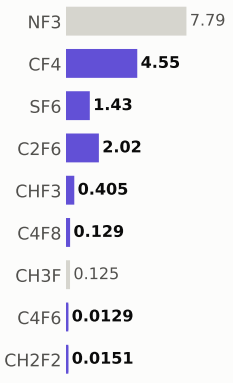

Step #19220: RIE

etch_anisotropic · RIE

1.04	881.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

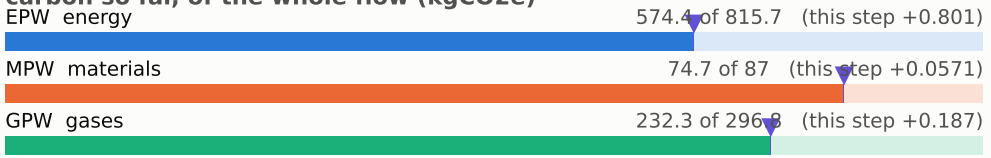

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

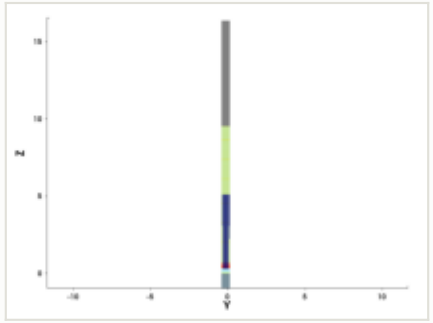

y cut at -0.150 µm

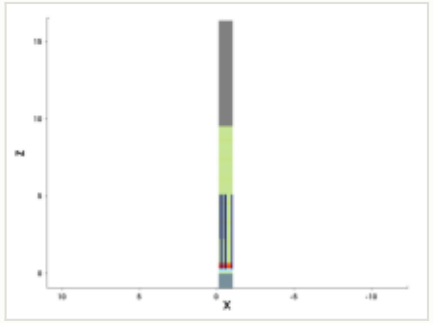

mask for this step

no mask for this step

steps by process area

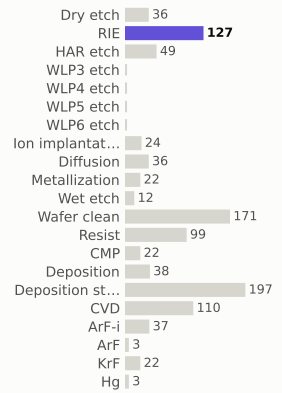

materials deposited (g)

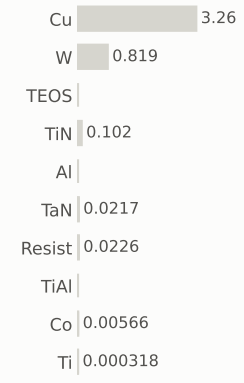

gases emitted (g)

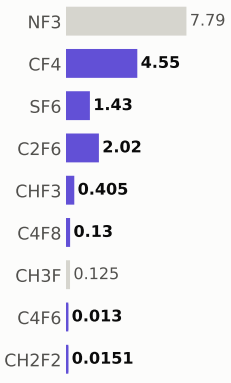

Step #19230: RIE

etch_anisotropic · RIE

1.04	882.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

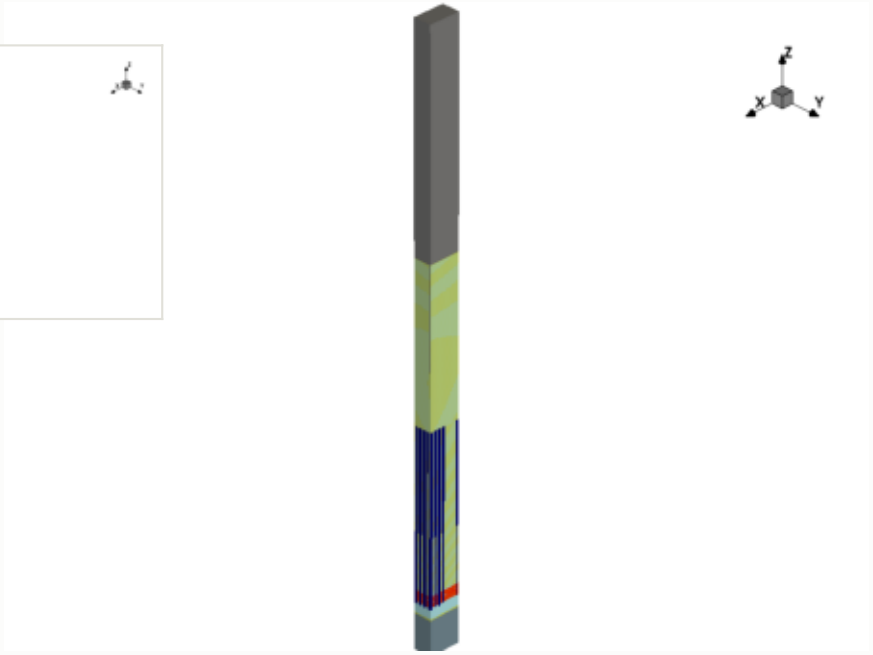

x cut at -0.570 µm

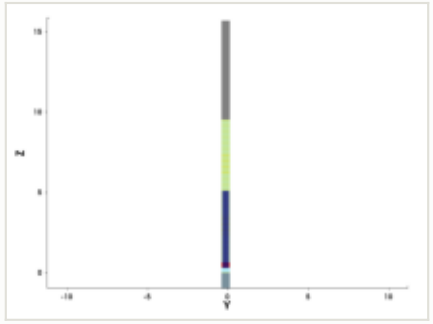

y cut at -0.150 µm

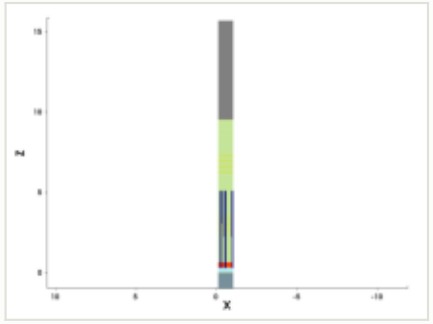

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

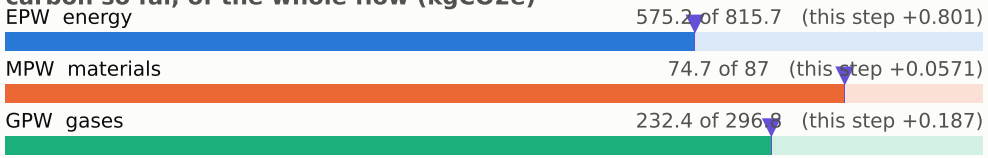

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

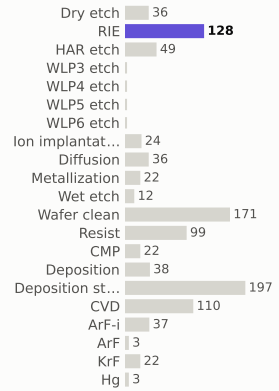

materials deposited (g)

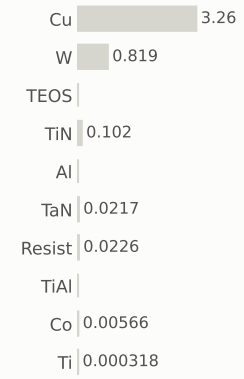

gases emitted (g)

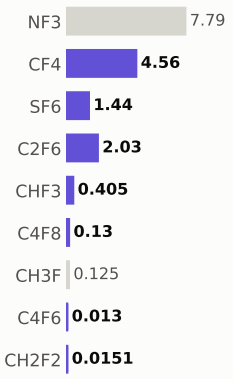

Step #19240: RIE

etch_anisotropic · RIE

1.04	883.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

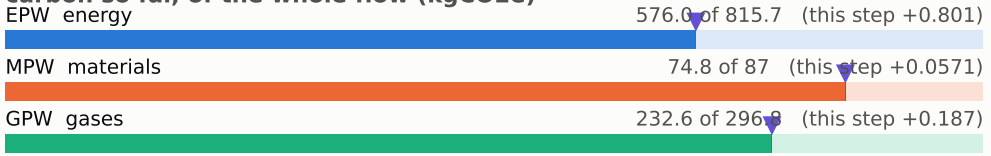

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

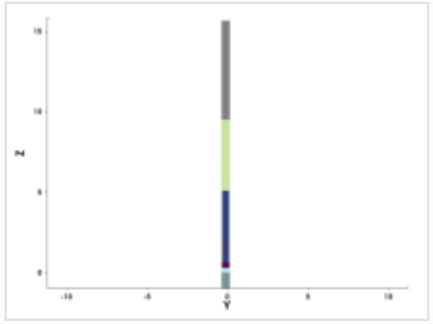

y cut at -0.150 µm

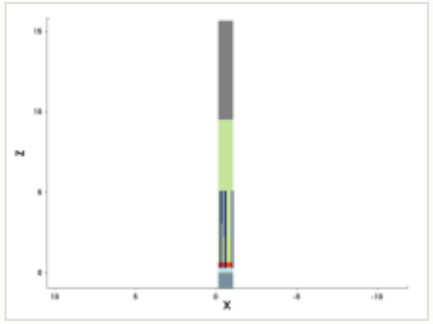

mask for this step

no mask for this step

steps by process area

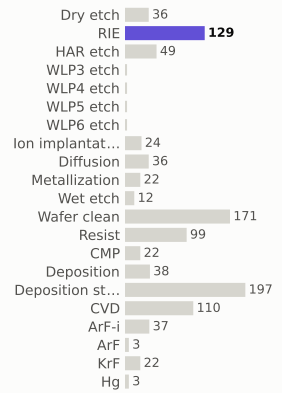

materials deposited (g)

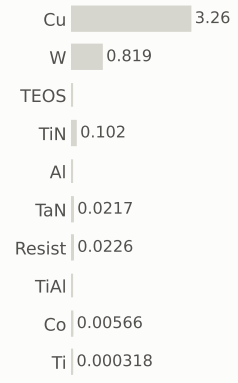

gases emitted (g)

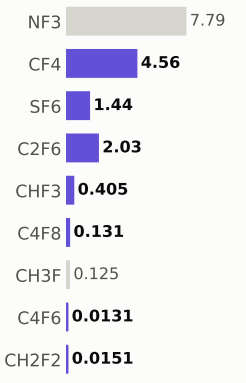

Step #19250: RIE

etch_anisotropic · RIE

1.04	884.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

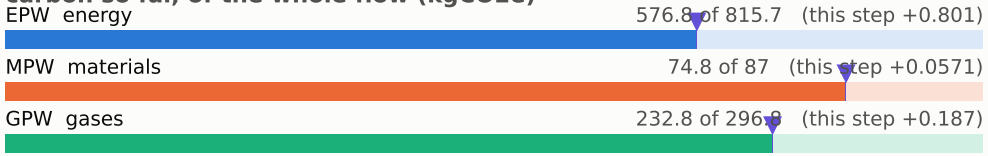

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

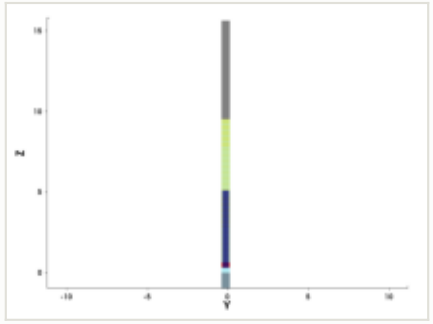

y cut at -0.150 µm

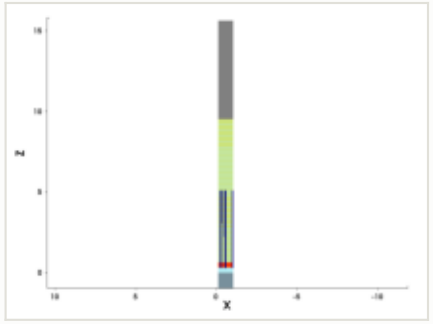

mask for this step

no mask for this step

steps by process area

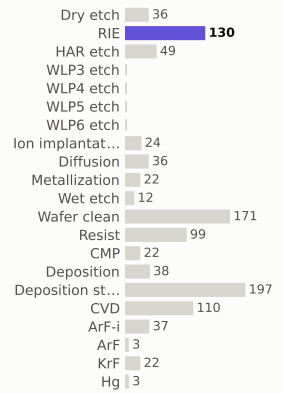

materials deposited (g)

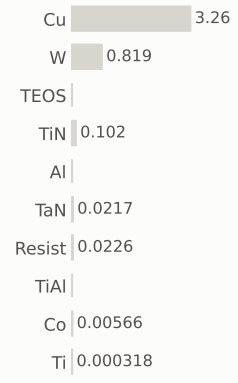

gases emitted (g)

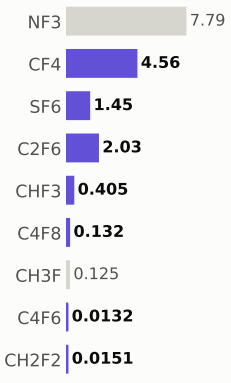

Step #19260: RIE

etch_anisotropic · RIE

1.04	885.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

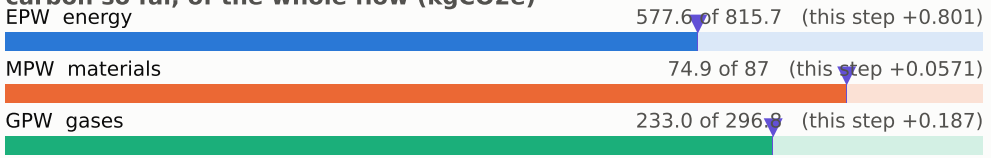

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

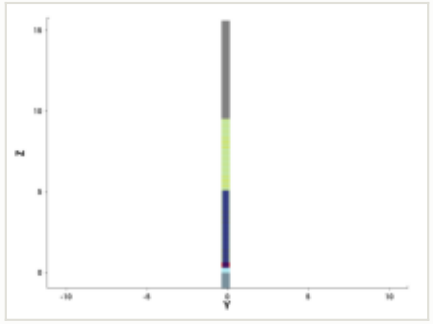

y cut at -0.150 µm

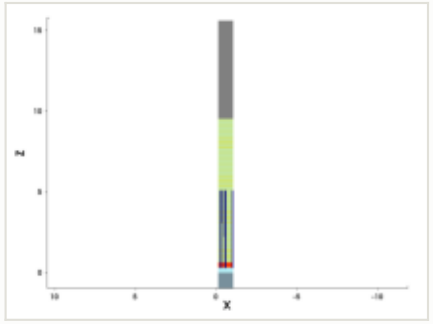

mask for this step

no mask for this step

steps by process area

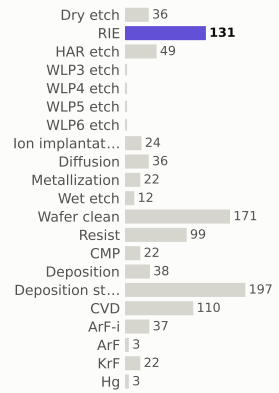

materials deposited (g)

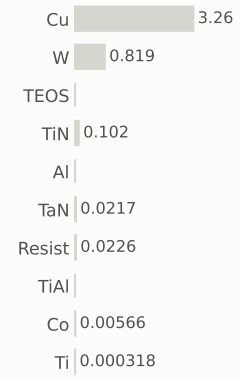

gases emitted (g)

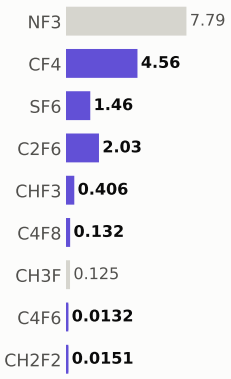

Step #19270: Dry_etch

etch_strip · Dry_etch

0.801	886.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

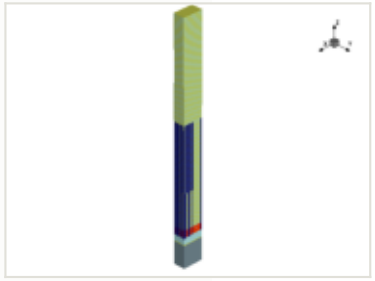

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

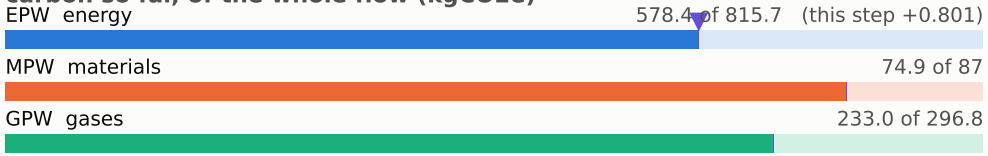

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

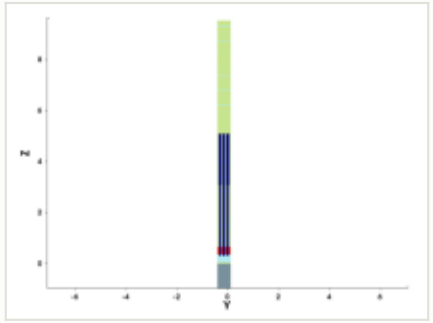

y cut at -0.150 µm

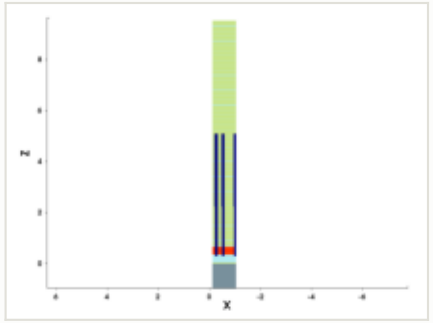

mask for this step

no mask for this step

steps by process area

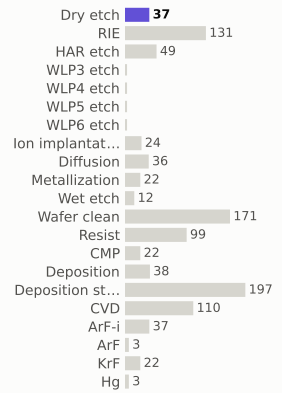

materials deposited (g)

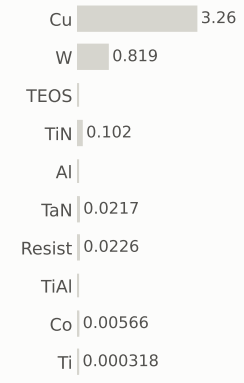

gases emitted (g)

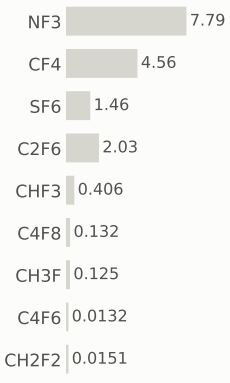

Step #19280: Wafer_clean

clean · Wafer_clean

0.169	886.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

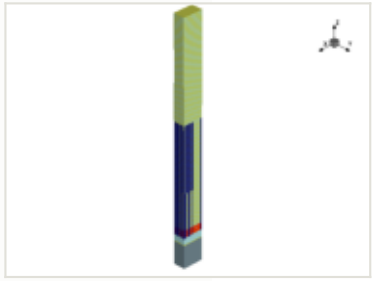

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

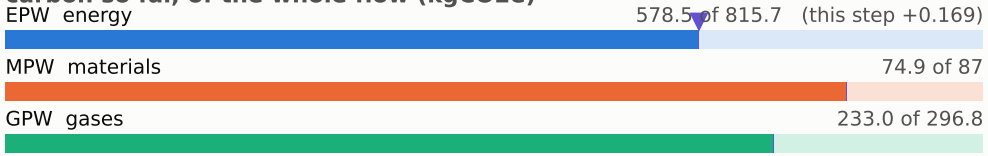

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

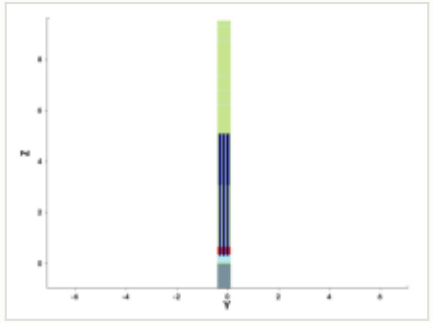

y cut at -0.150 µm

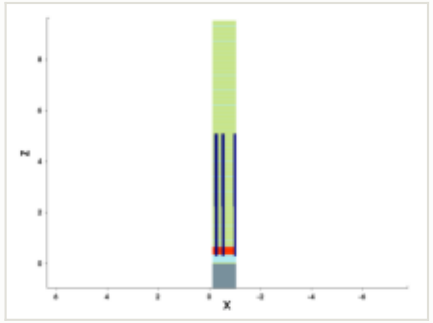

mask for this step

no mask for this step

steps by process area

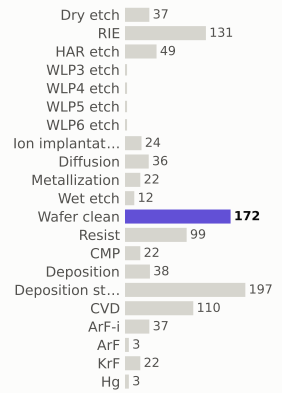

materials deposited (g)

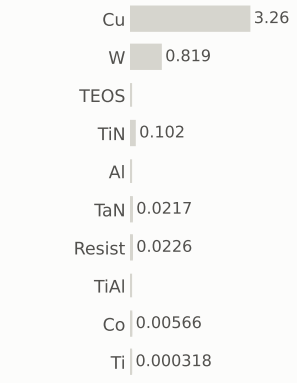

gases emitted (g)

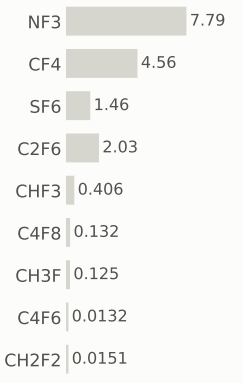

Step #19290: KrF

litho_patterning · KrF

0.199	886.6	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

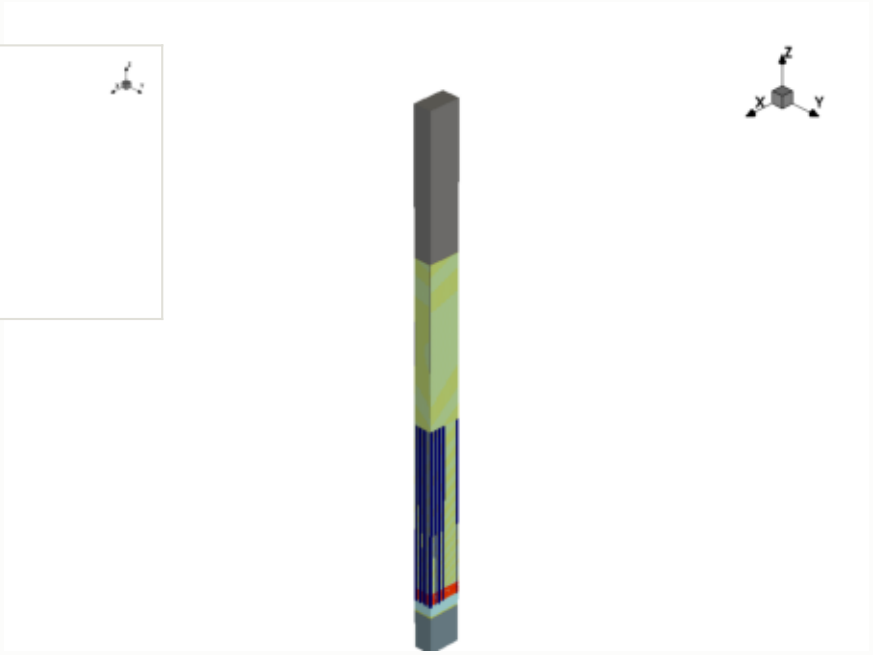

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

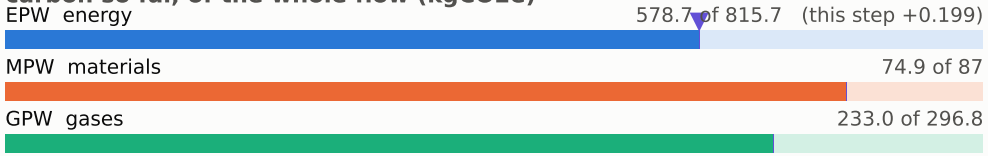

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

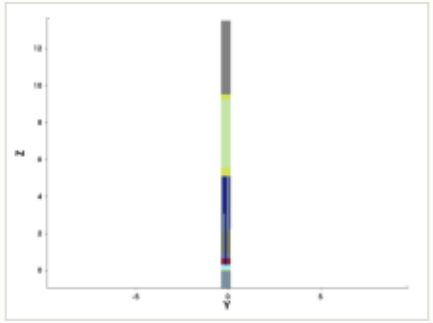

y cut at -0.150 µm

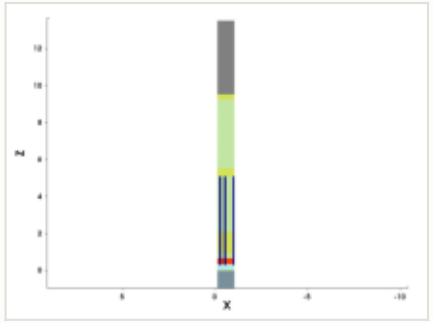

mask: layer 31:0, positive (GDSII)

steps by process area

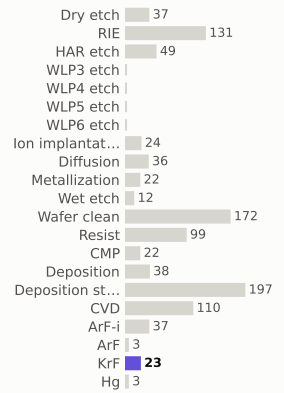

materials deposited (g)

gases emitted (g)

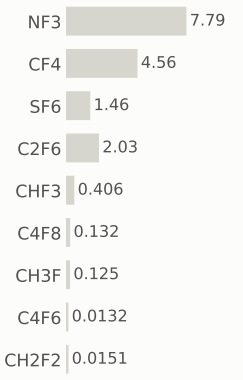

Step #19300: WLP3_etch

etch_anisotropic · WLP3_etch

4.19	890.8	0.35%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

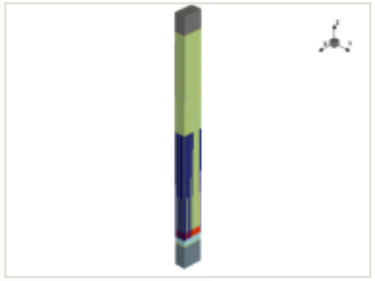

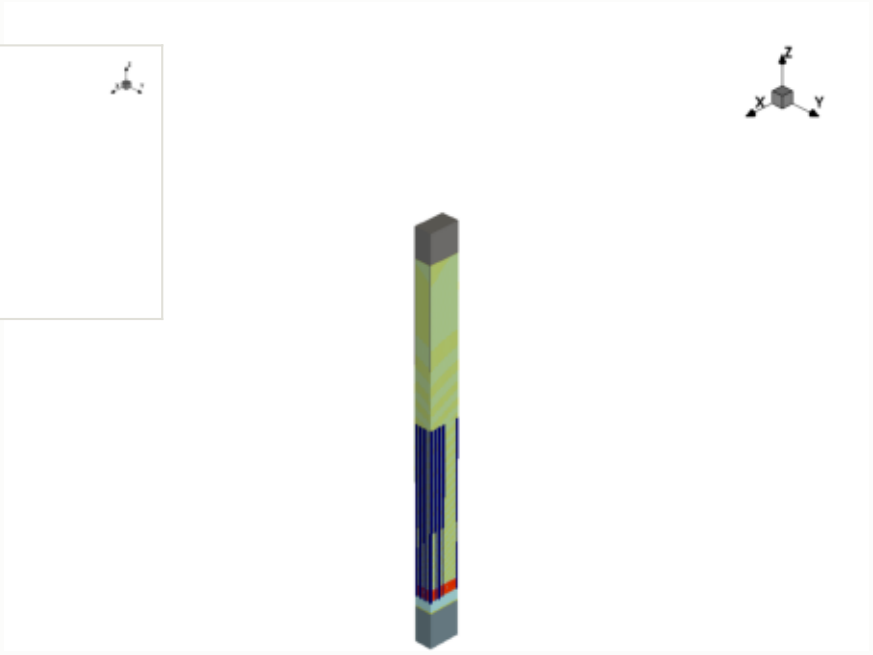

this step

process area	WLP3_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

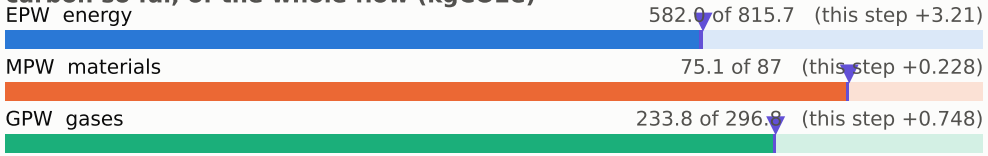

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

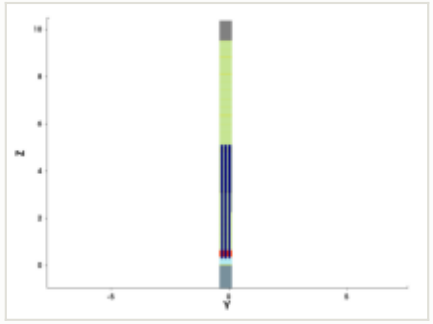

y cut at -0.150 µm

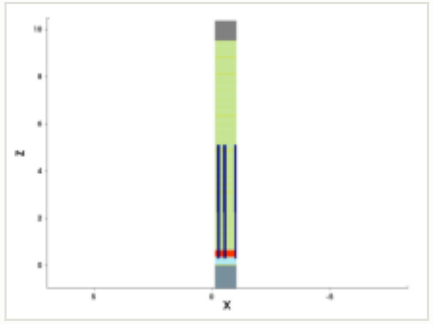

mask for this step

no mask for this step

steps by process area

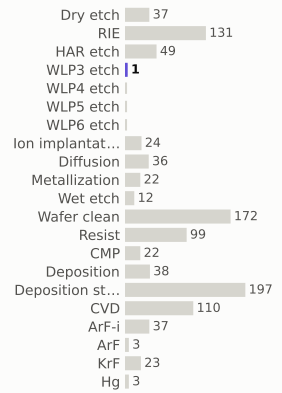

materials deposited (g)

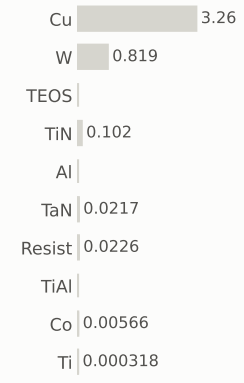

gases emitted (g)

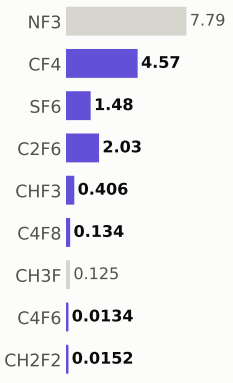

Step #19310: WLP3_etch

etch_anisotropic · WLP3_etch

4.19	895.0	0.35%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

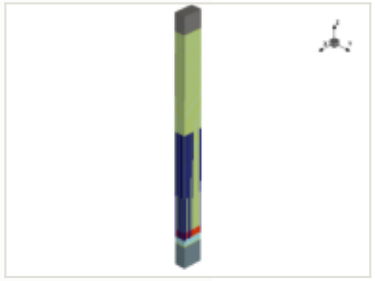

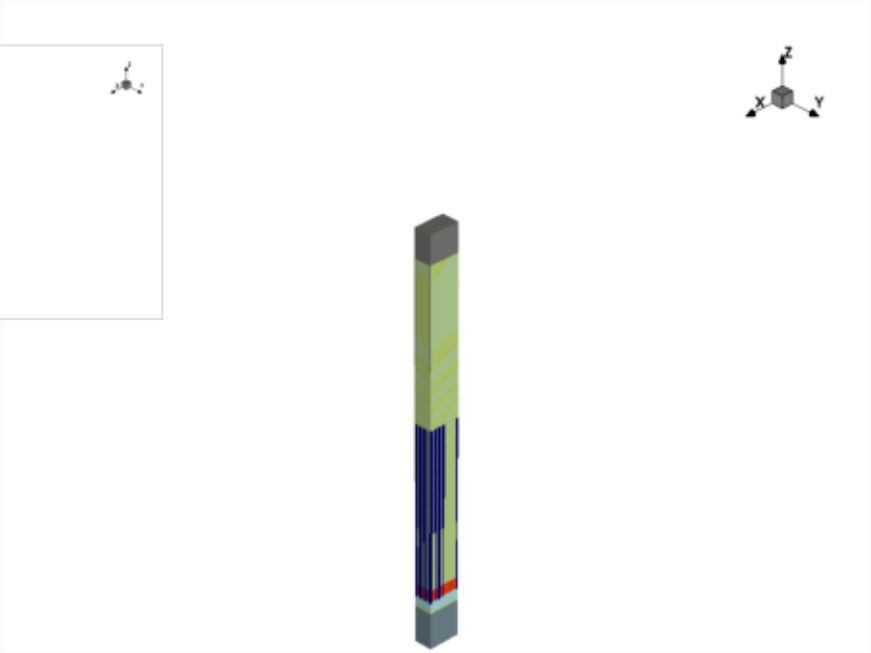

this step

process area	WLP3_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

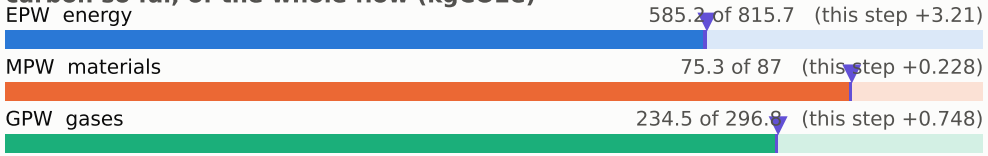

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

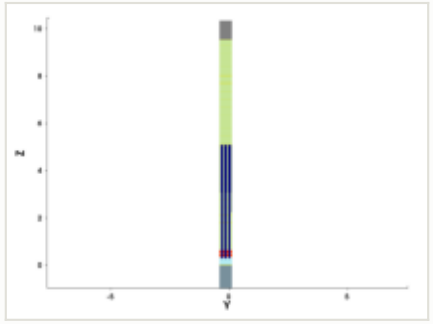

y cut at -0.150 µm

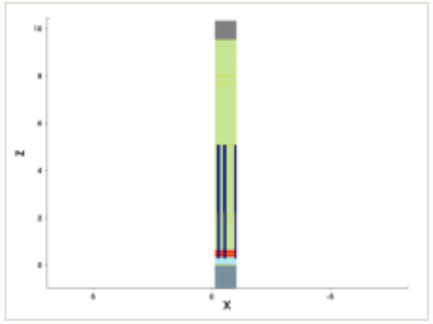

mask for this step

no mask for this step

steps by process area

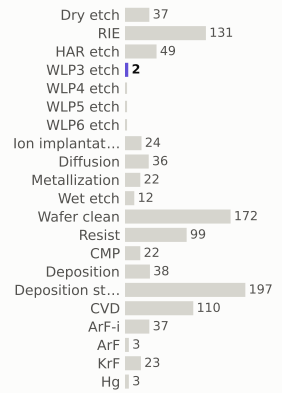

materials deposited (g)

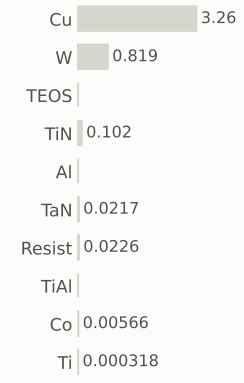

gases emitted (g)

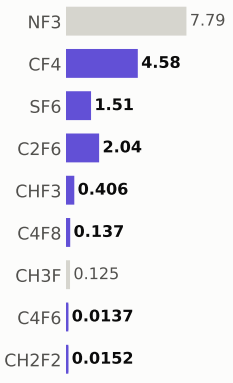

Step #19320: Dry_etch

etch_strip · Dry_etch

0.801	895.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

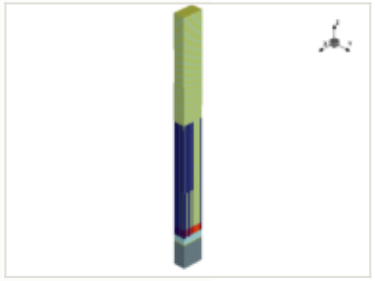

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

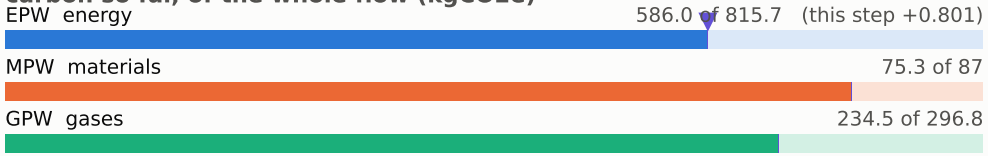

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

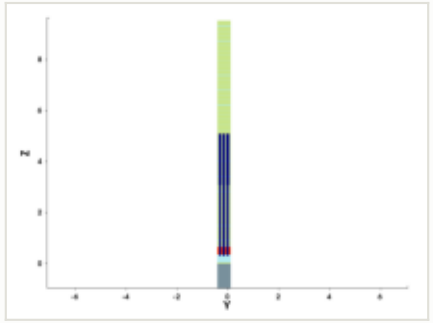

y cut at -0.150 µm

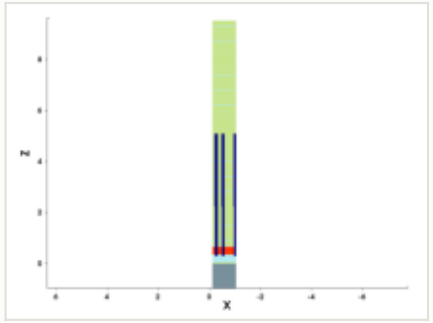

mask for this step

no mask for this step

steps by process area

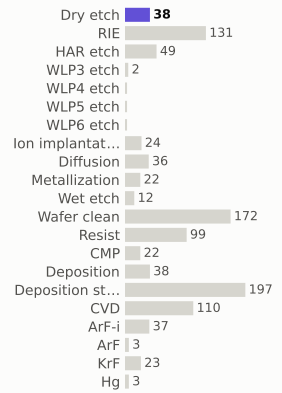

materials deposited (g)

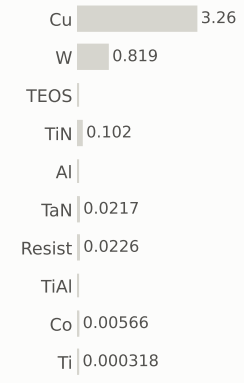

gases emitted (g)

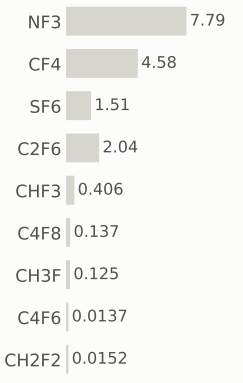

Step #19330: Wafer_clean

clean · Wafer_clean

0.169	896.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

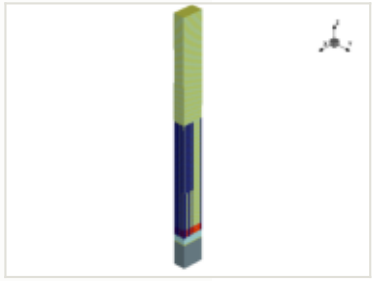

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

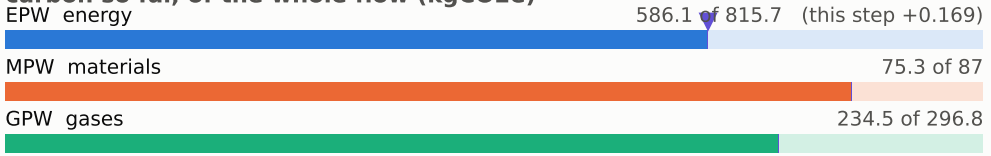

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

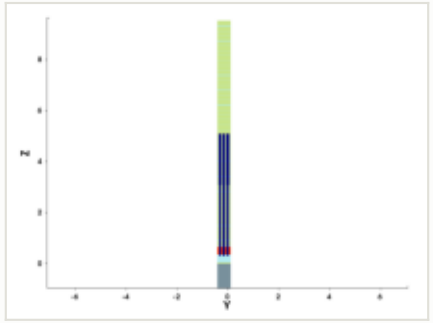

y cut at -0.150 µm

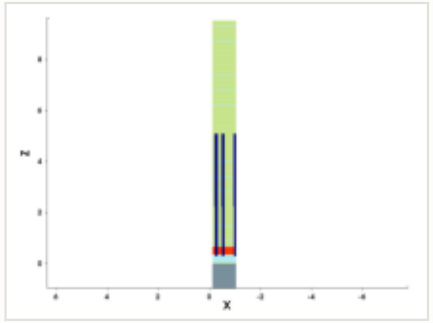

mask for this step

no mask for this step

steps by process area

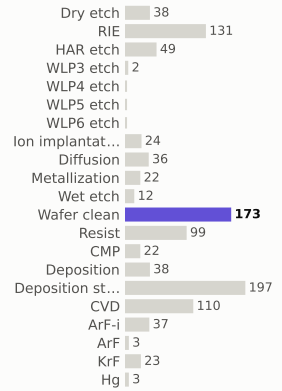

materials deposited (g)

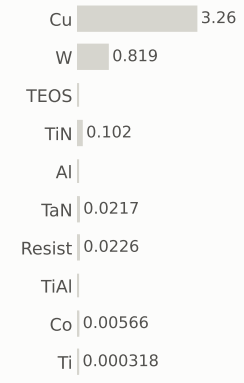

gases emitted (g)

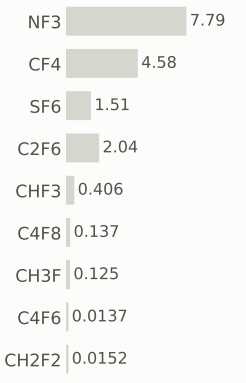

Step #19340: KrF

litho_patterning · KrF

0.199	896.2	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

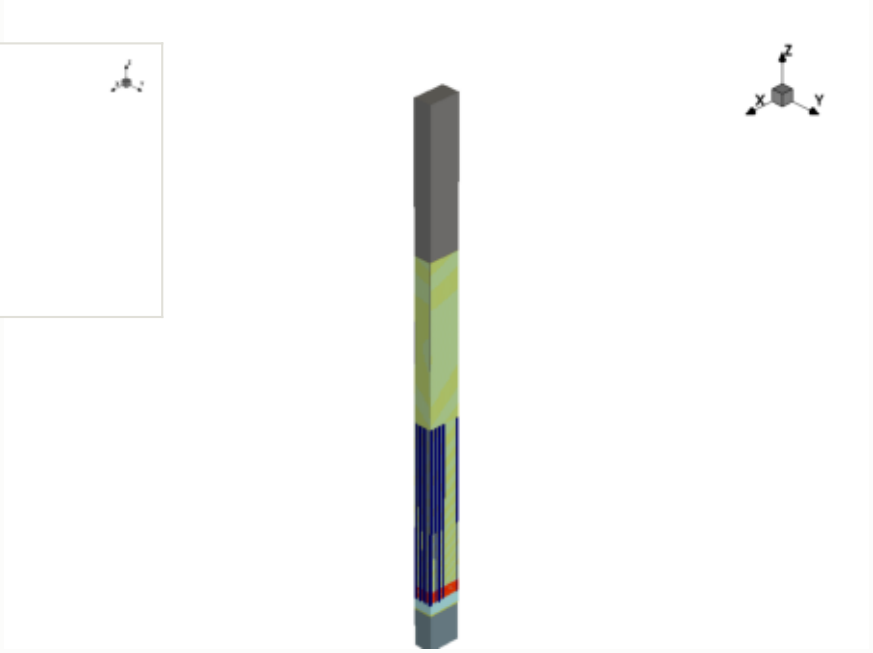

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

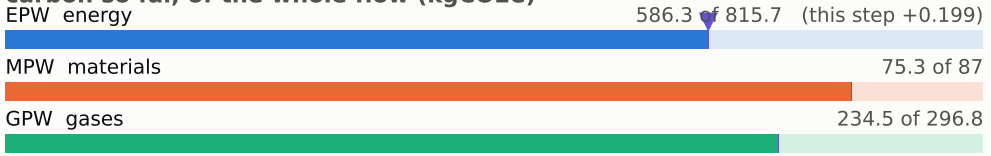

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

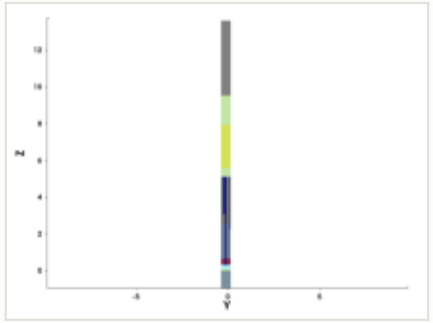

y cut at -0.150 µm

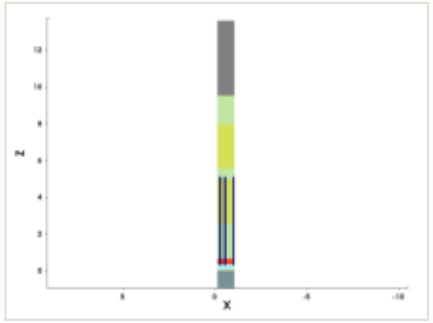

mask: layer 32:0, positive (GDSII)

steps by process area

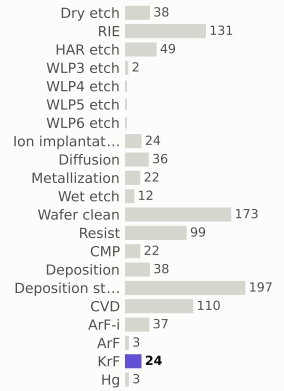

materials deposited (g)

gases emitted (g)

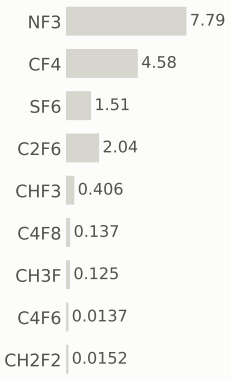

Step #19350: WLP4_etch

etch_anisotropic · WLP4_etch

4.19	900.4	0.35%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

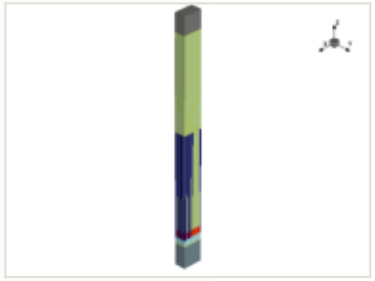

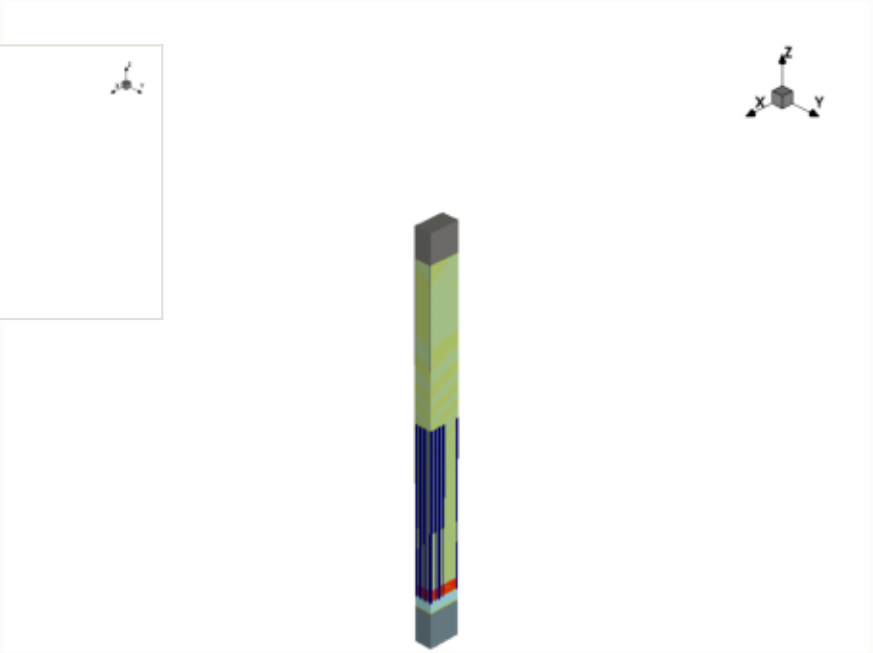

this step

process area	WLP4_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

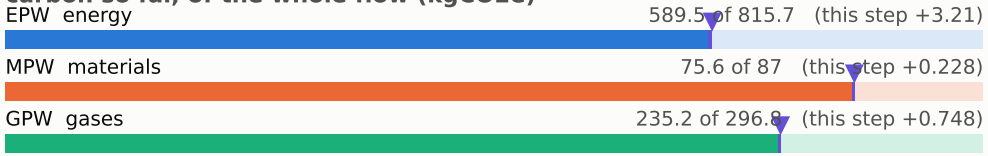

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

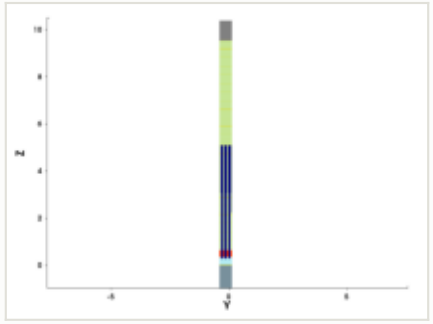

y cut at -0.150 µm

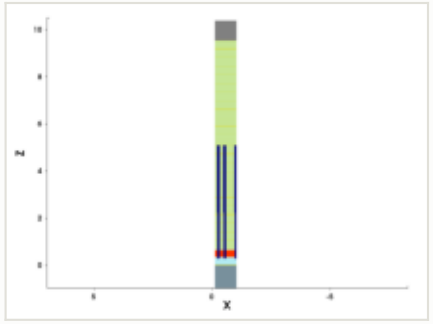

mask for this step

no mask for this step

steps by process area

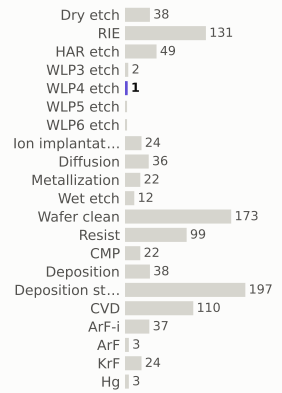

materials deposited (g)

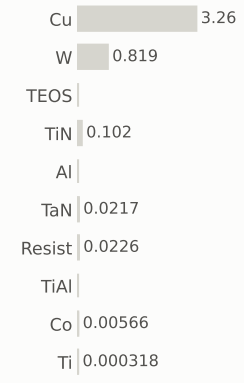

gases emitted (g)

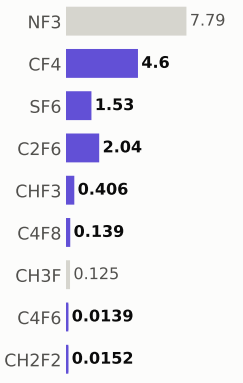

Step #19360: WLP4_etch

etch_anisotropic · WLP4_etch

4.19	904.5	0.35%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

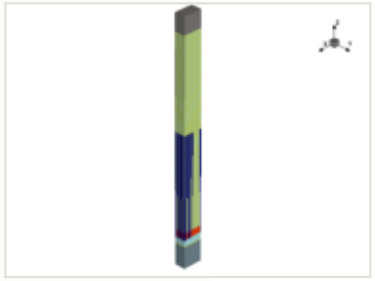

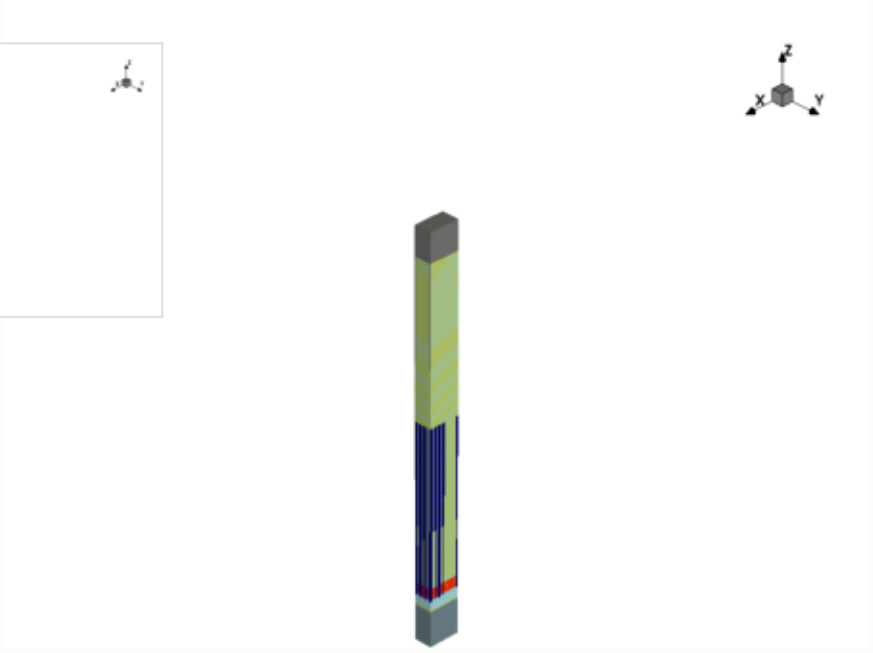

this step

process area	WLP4_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

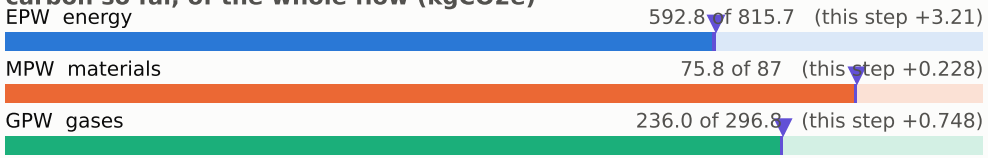

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

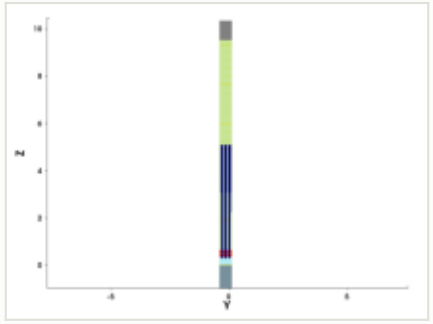

y cut at -0.150 µm

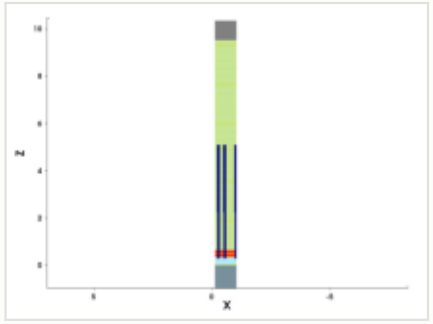

mask for this step

no mask for this step

steps by process area

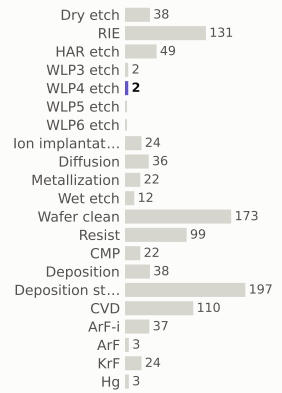

materials deposited (g)

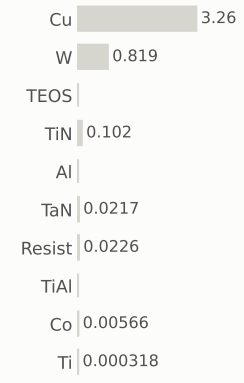

gases emitted (g)

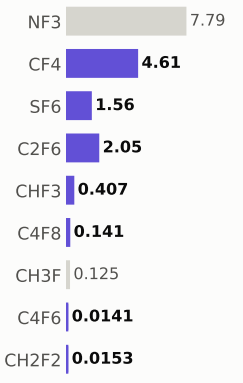

Step #19370: Dry_etch

etch_strip · Dry_etch

0.801	905.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

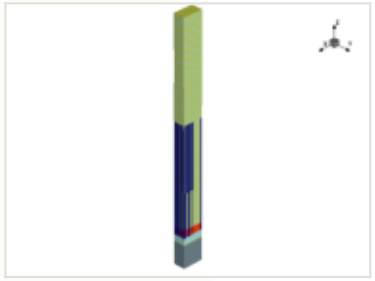

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

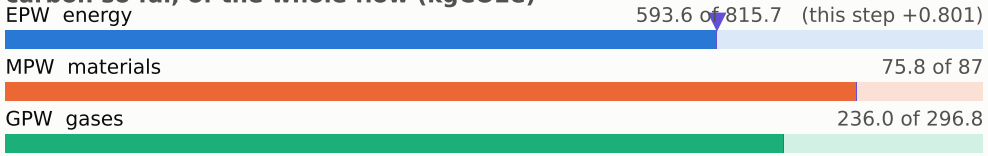

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

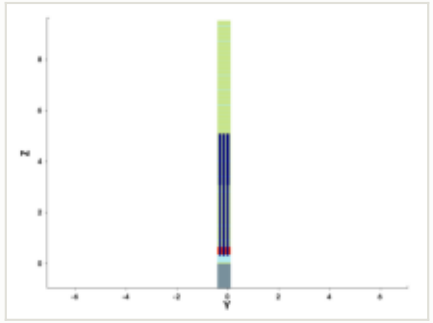

y cut at -0.150 µm

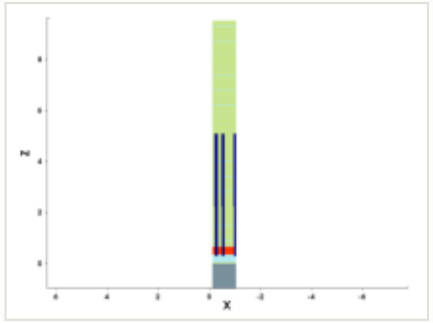

mask for this step

no mask for this step

steps by process area

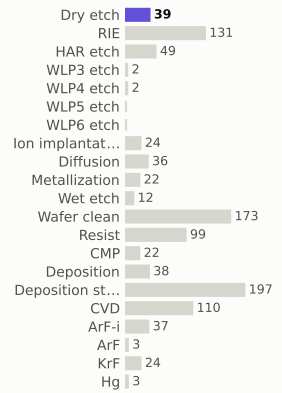

materials deposited (g)

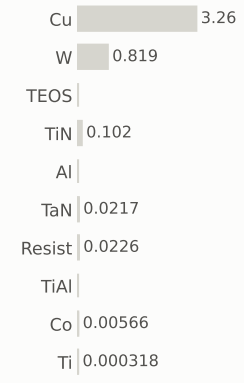

gases emitted (g)

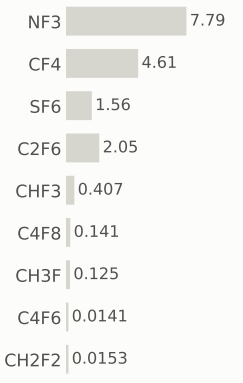

Step #19380: Wafer_clean

clean · Wafer_clean

0.169	905.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

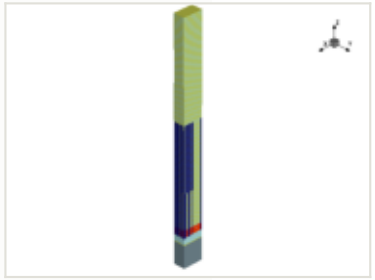

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

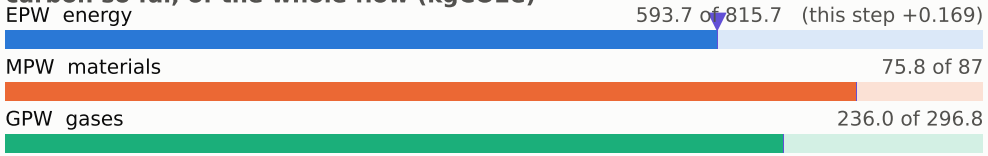

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

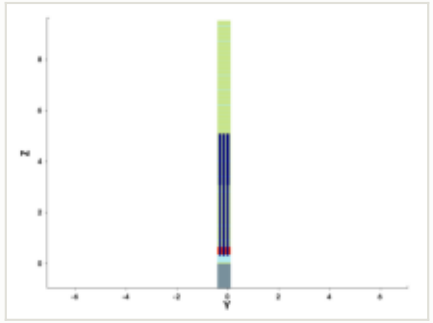

y cut at -0.150 µm

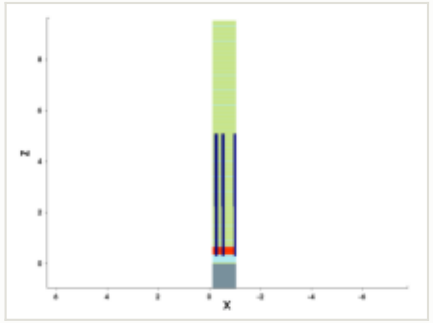

mask for this step

no mask for this step

steps by process area

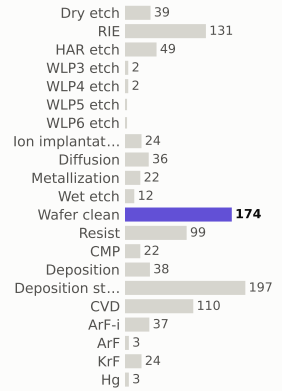

materials deposited (g)

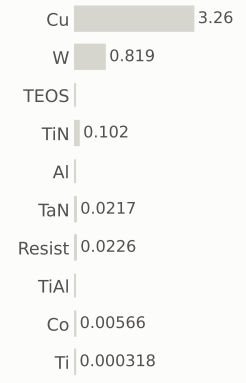

gases emitted (g)

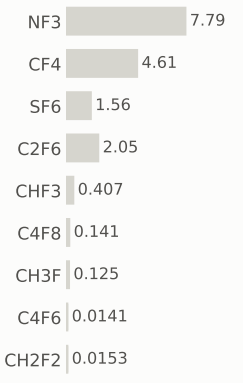

Step #19390: KrF

litho_patterning · KrF

0.199	905.7	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

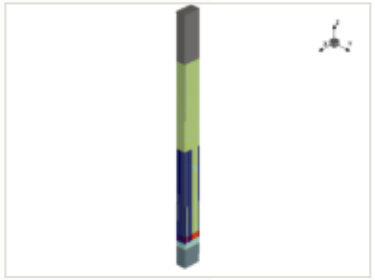

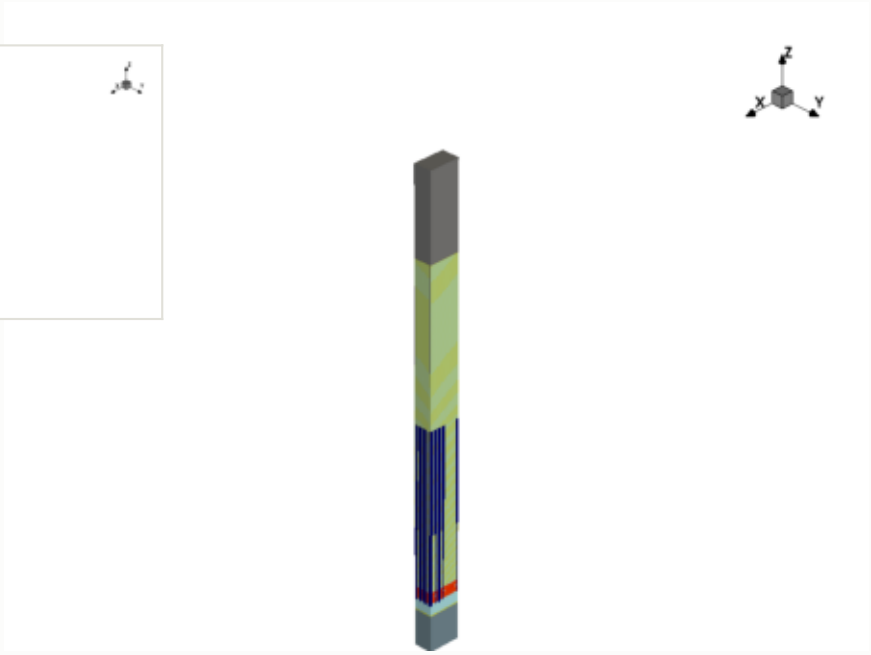

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

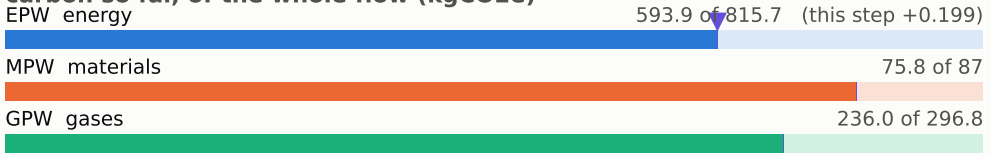

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

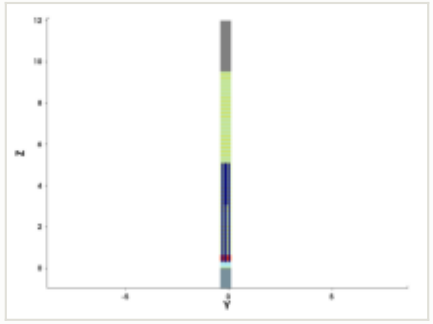

y cut at -0.150 µm

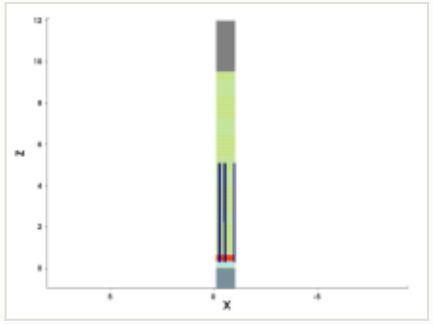

mask: layer 33:0, positive (GDSII)

steps by process area

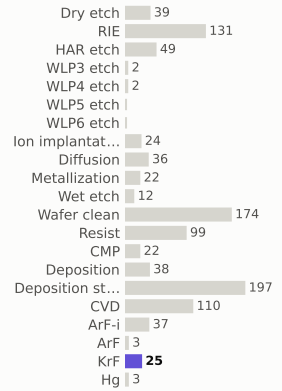

materials deposited (g)

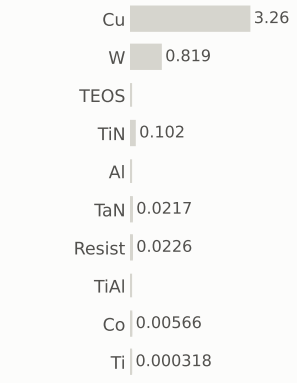

gases emitted (g)

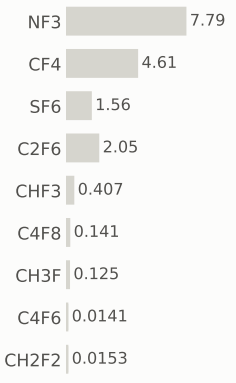

Step #19400: WLP5_etch

etch_anisotropic · WLP5_etch

2.1	907.8	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

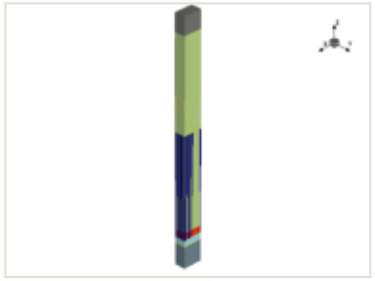

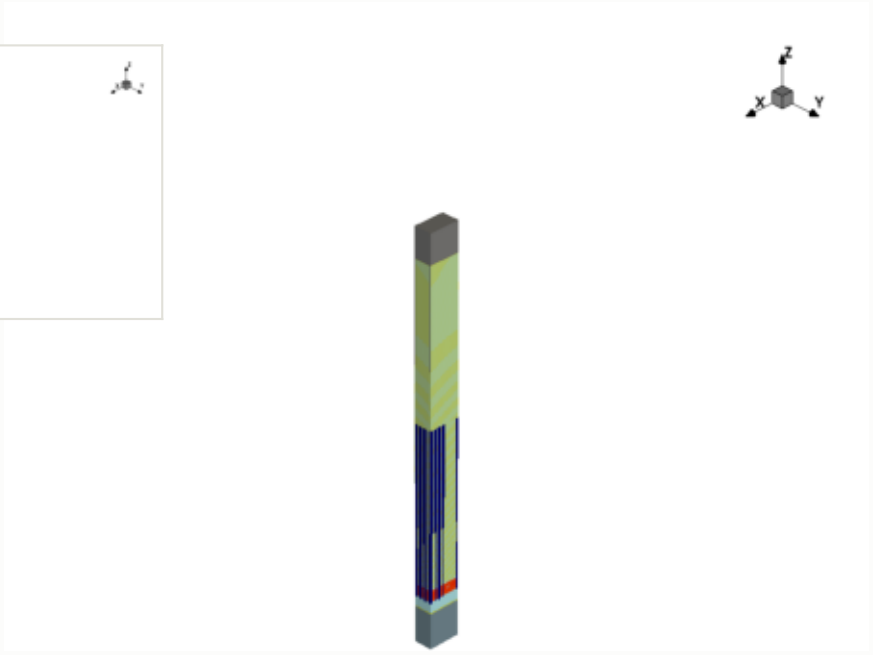

this step

process area	WLP5_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.321 g, SF6 0.878 g
energy	2.67 kWh + 1.07 overhead

EPW	1.61 kgCO2e
EPW tool	1.15 kgCO2e
EPW overhead	0.459 kgCO2e
MPW	0.114 kgCO2e (gas 0.114)
GPW	0.374 kgCO2e
embodied carbon	**2.1 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

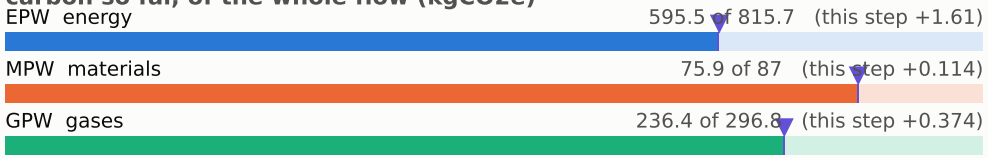

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

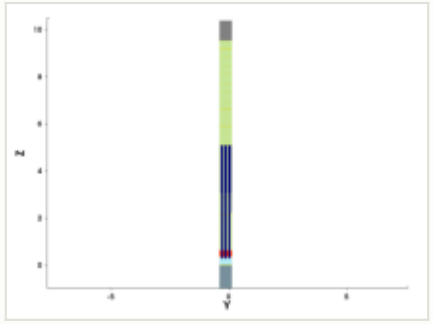

y cut at -0.150 µm

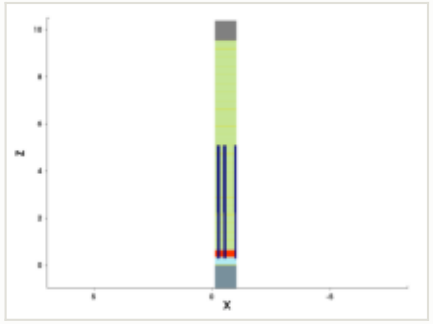

mask for this step

no mask for this step

steps by process area

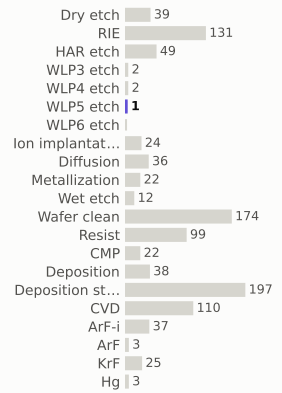

materials deposited (g)

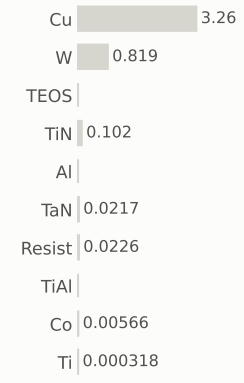

gases emitted (g)

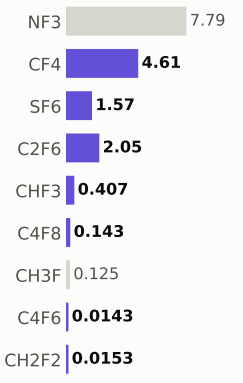

Step #19410: WLP5_etch

etch_anisotropic · WLP5_etch

2.1	909.9	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

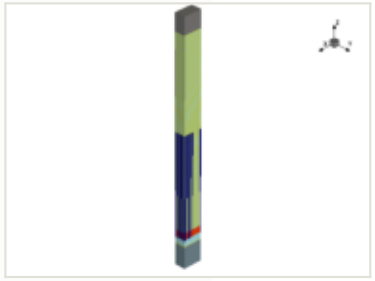

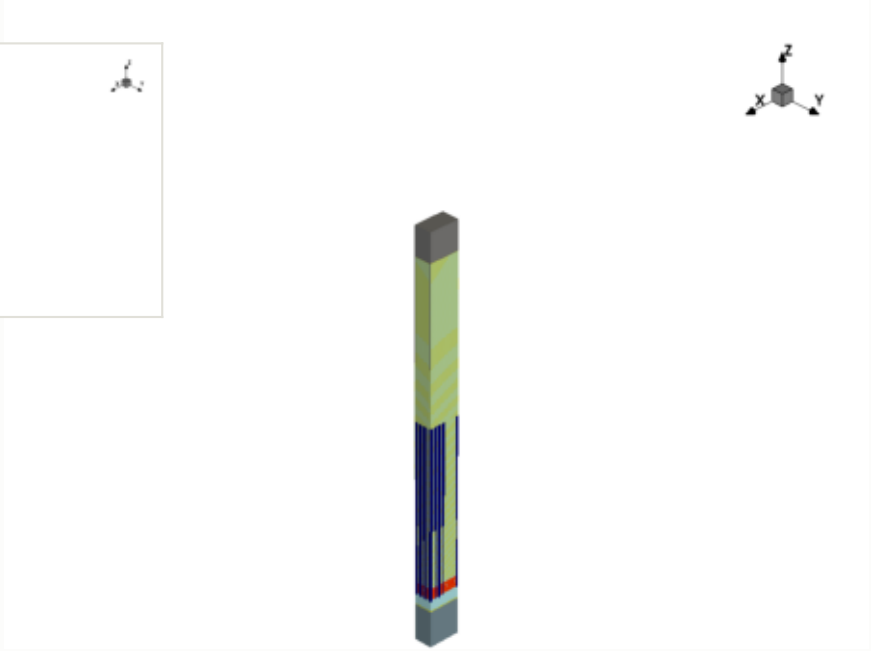

this step

process area	WLP5_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.321 g, SF6 0.878 g
energy	2.67 kWh + 1.07 overhead

EPW	1.61 kgCO2e
EPW tool	1.15 kgCO2e
EPW overhead	0.459 kgCO2e
MPW	0.114 kgCO2e (gas 0.114)
GPW	0.374 kgCO2e
embodied carbon	**2.1 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

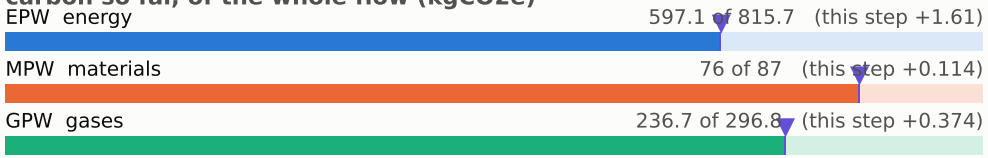

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

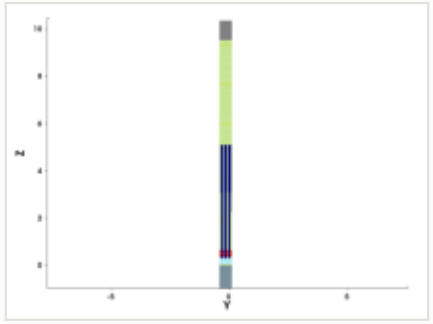

y cut at -0.150 µm

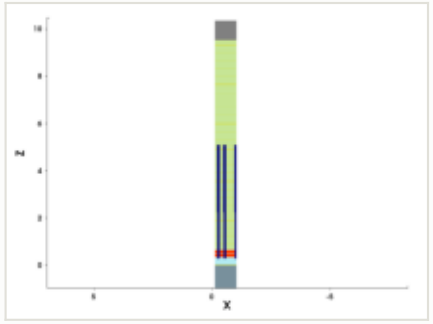

mask for this step

no mask for this step

steps by process area

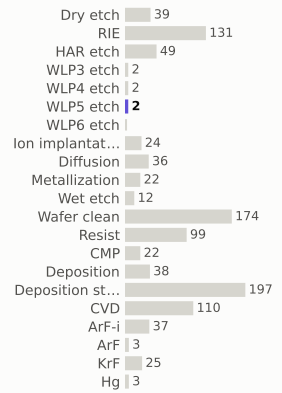

materials deposited (g)

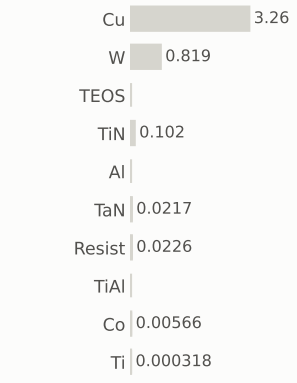

gases emitted (g)

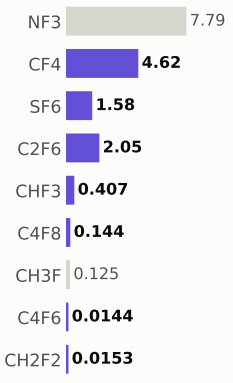

Step #19420: Dry_etch

etch_strip · Dry_etch

0.801	910.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

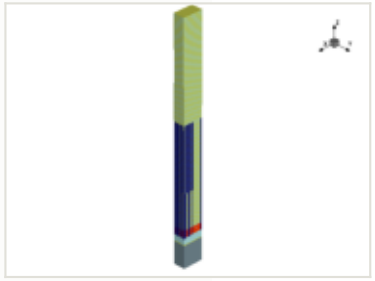

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

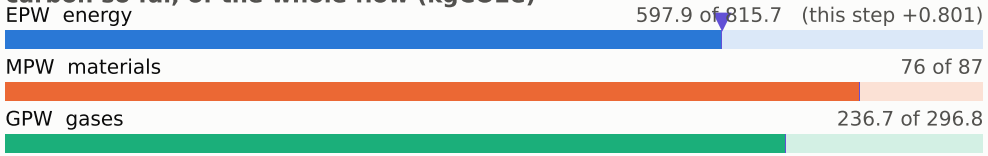

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

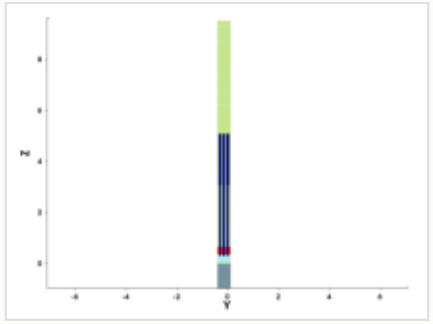

y cut at -0.150 µm

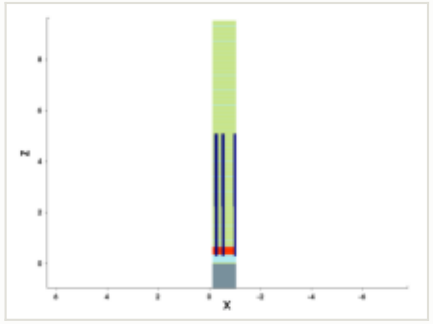

mask for this step

no mask for this step

steps by process area

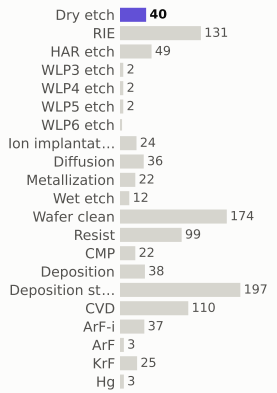

materials deposited (g)

gases emitted (g)

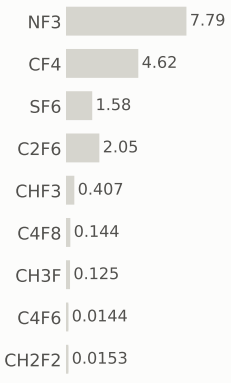

Step #19430: Wafer_clean

clean · Wafer_clean

0.169	910.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

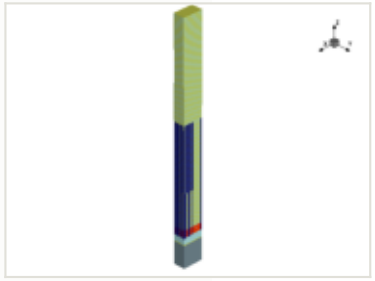

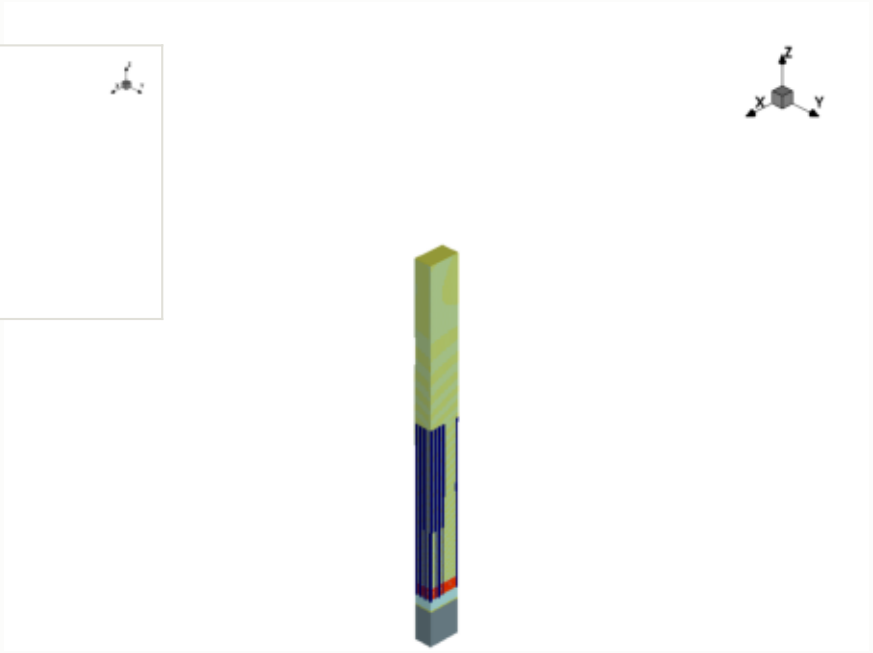

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

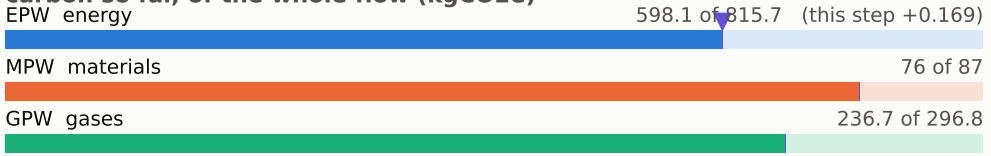

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

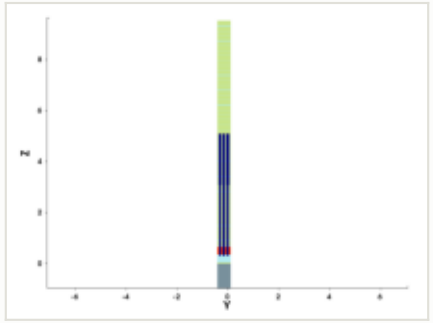

y cut at -0.150 µm

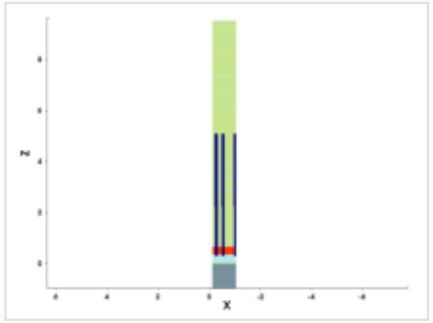

mask for this step

no mask for this step

steps by process area

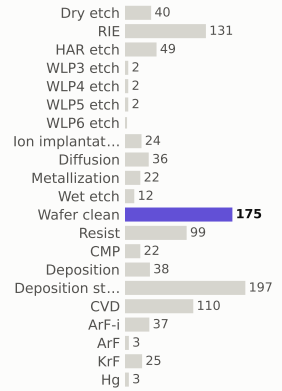

materials deposited (g)

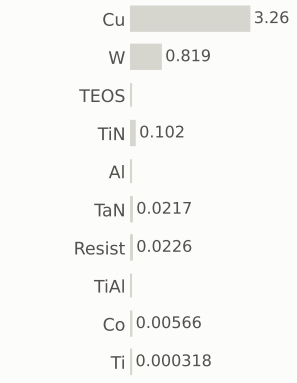

gases emitted (g)

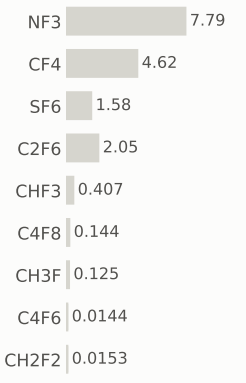

Step #19440: KrF

litho_patterning · KrF

0.199	911.1	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

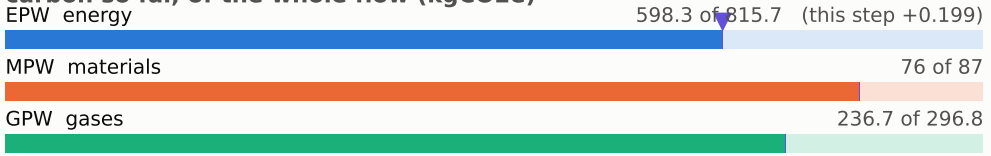

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

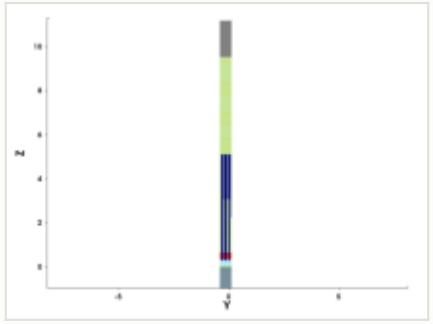

y cut at -0.150 µm

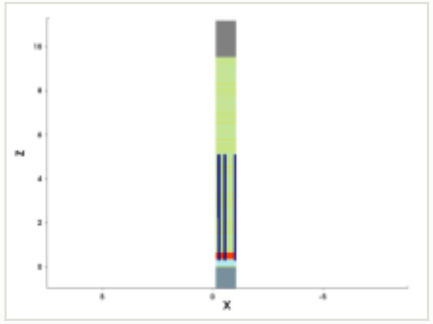

mask: layer 34:0, positive (GDSII)

steps by process area

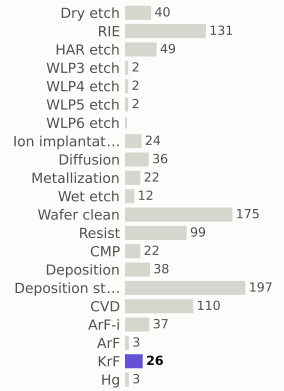

materials deposited (g)

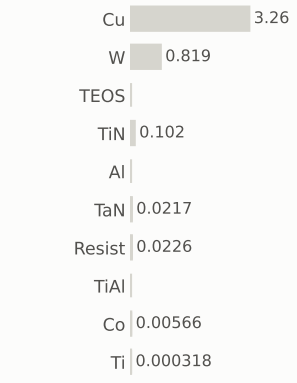

gases emitted (g)

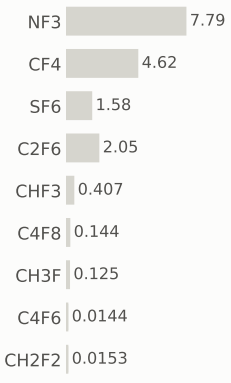

Step #19450: WLP6_etch

etch_anisotropic · WLP6_etch

1.04	912.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

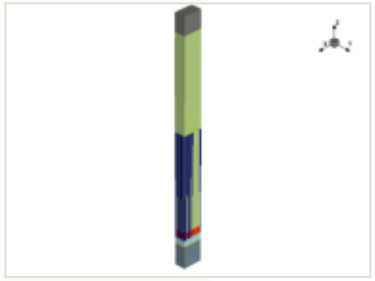

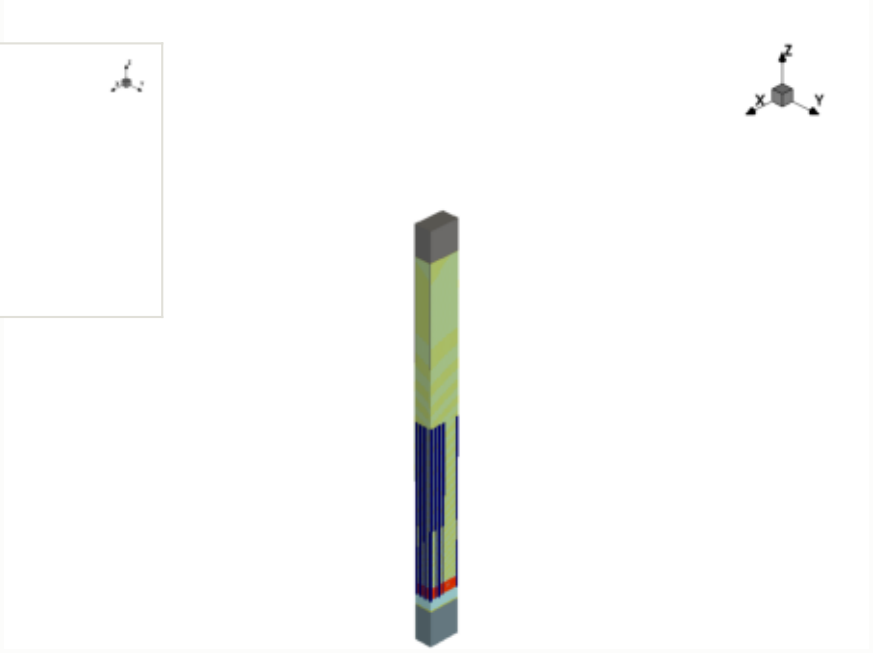

this step

process area	WLP6_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

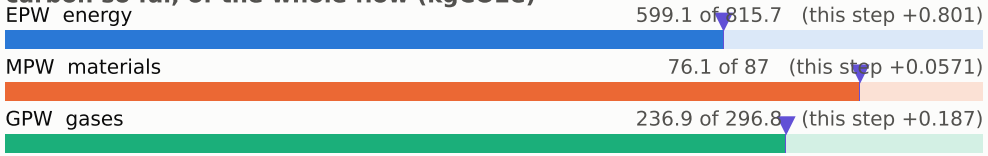

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

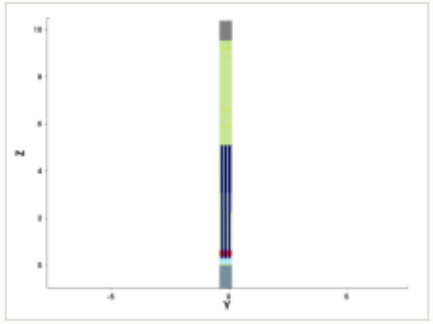

y cut at -0.150 µm

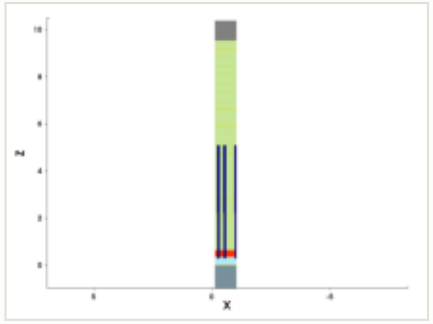

mask for this step

no mask for this step

steps by process area

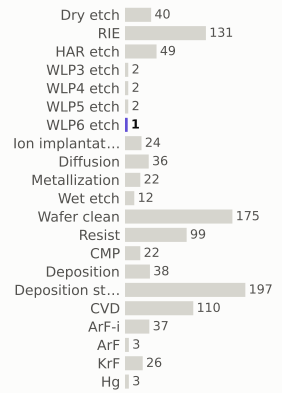

materials deposited (g)

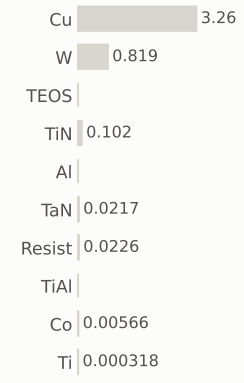

gases emitted (g)

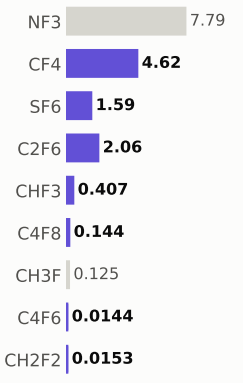

Step #19460: WLP6_etch

etch_anisotropic · WLP6_etch

1.04	913.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

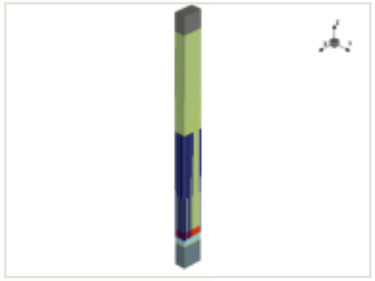

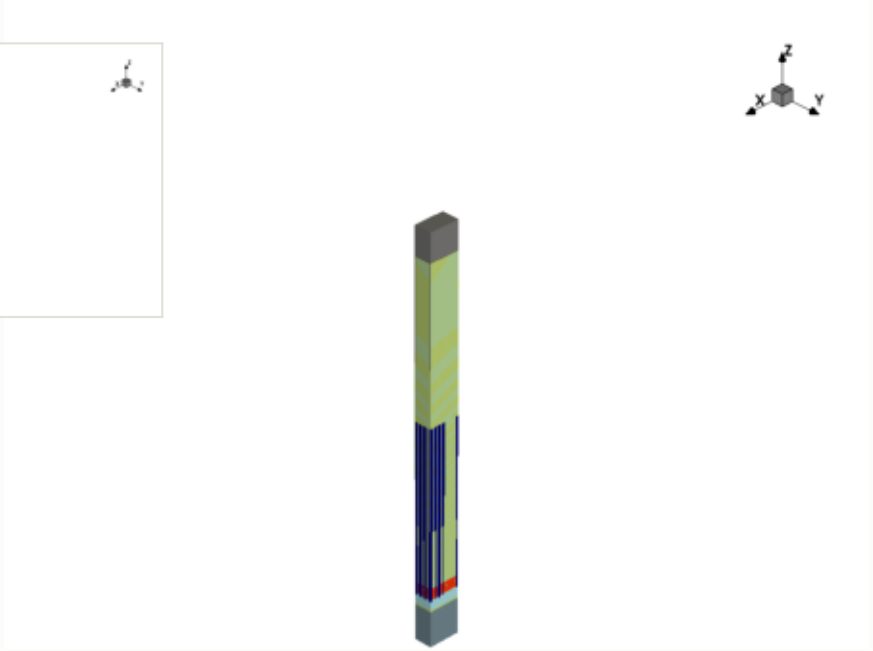

this step

process area	WLP6_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

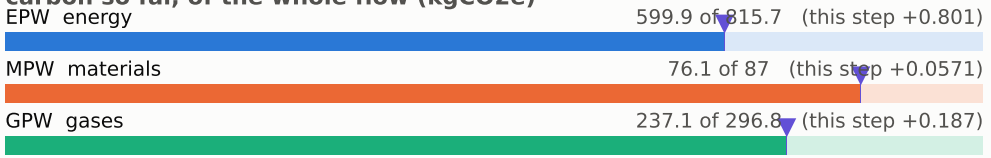

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

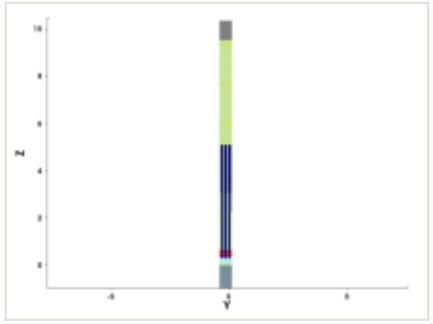

y cut at -0.150 µm

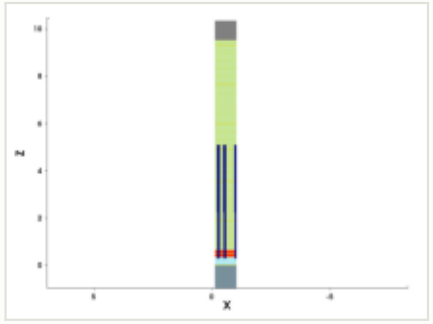

mask for this step

no mask for this step

steps by process area

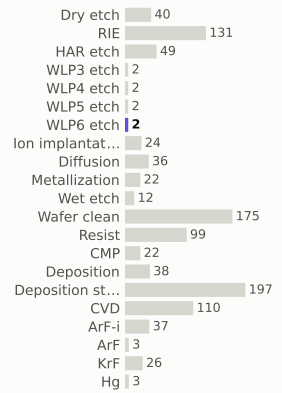

materials deposited (g)

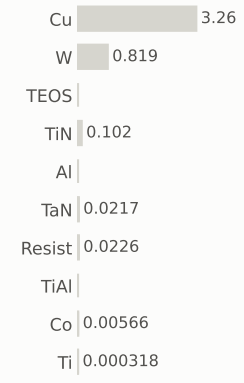

gases emitted (g)

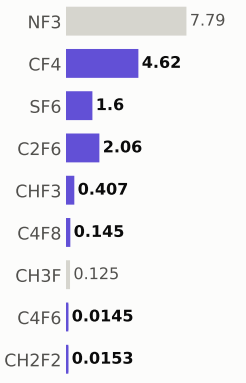

Step #19470: Dry_etch

etch_strip · Dry_etch

0.801	914.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

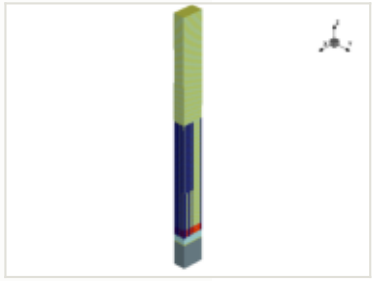

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

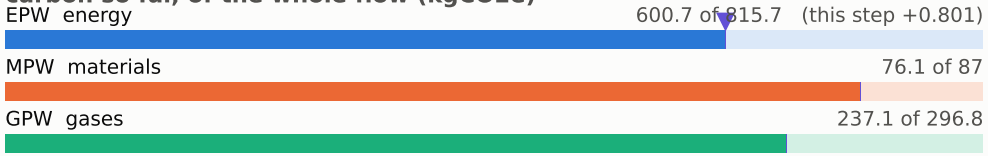

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

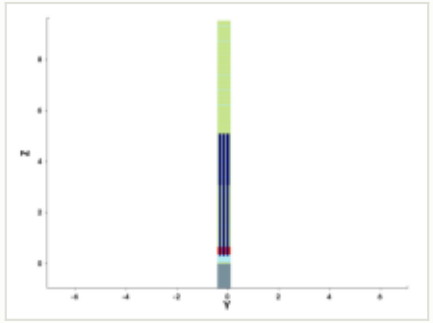

y cut at -0.150 µm

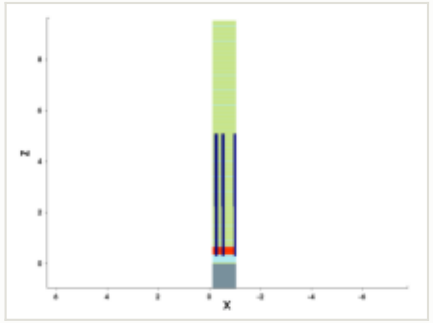

mask for this step

no mask for this step

steps by process area

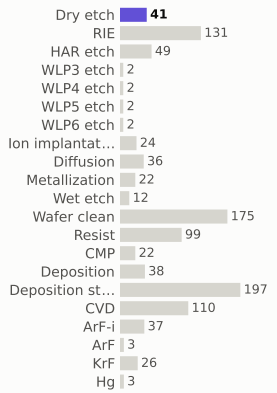

materials deposited (g)

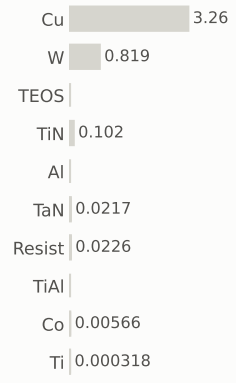

gases emitted (g)

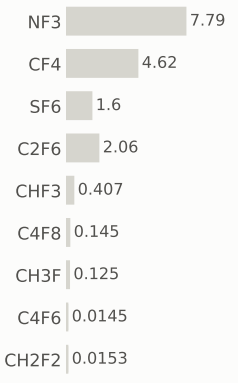

Step #19480: Wafer_clean

clean · Wafer_clean

0.169	914.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

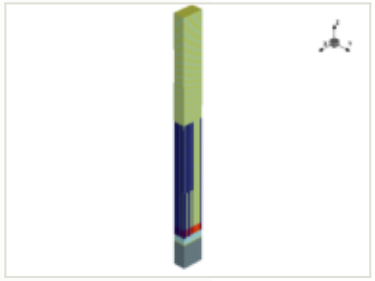

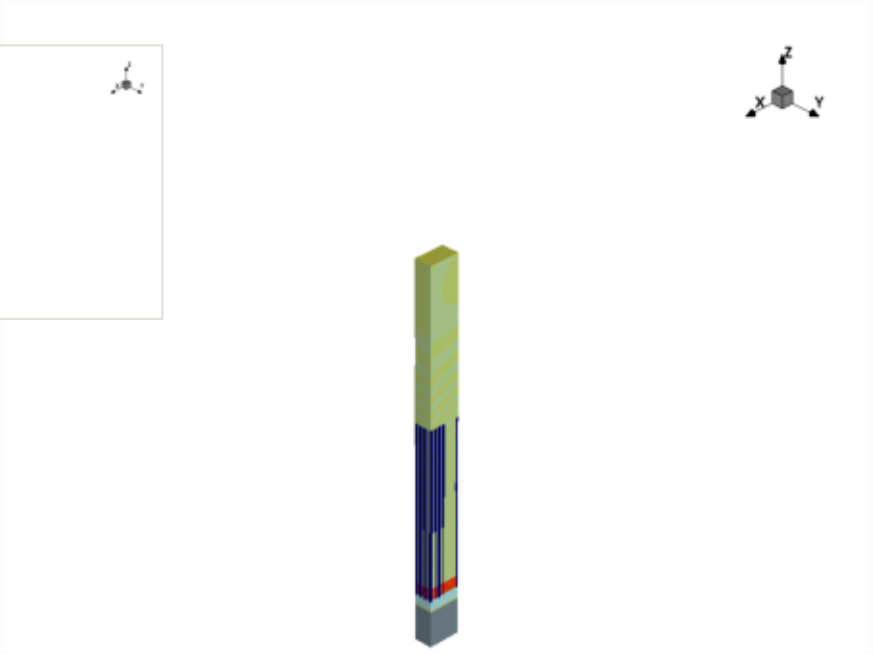

x cut at -0.570 µm

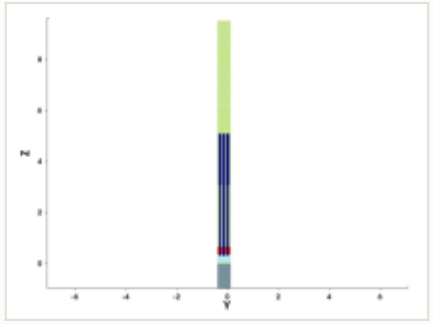

y cut at -0.150 µm

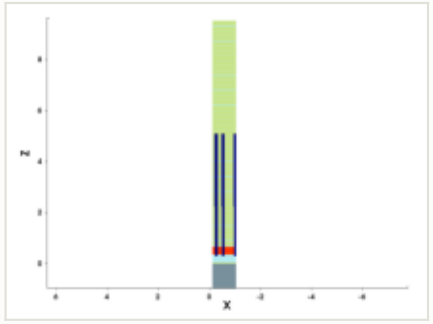

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

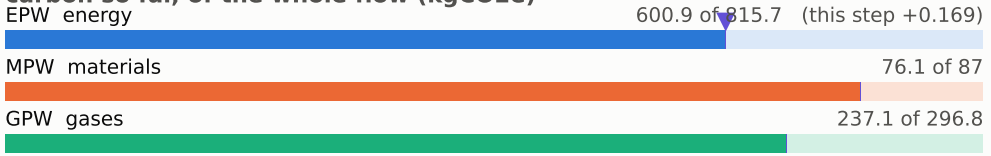

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

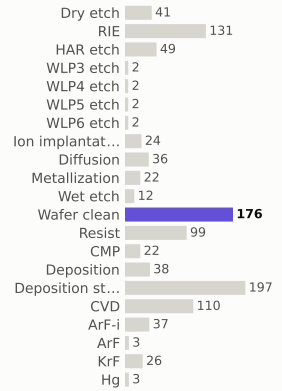

materials deposited (g)

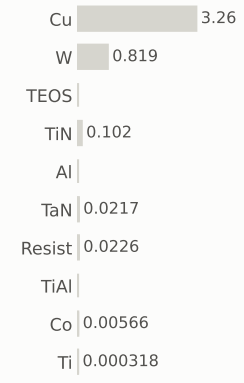

gases emitted (g)

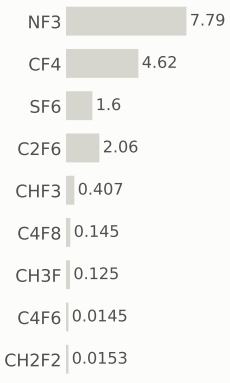

Step #19490: RIE

etch_anisotropic · RIE

1.04	915.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

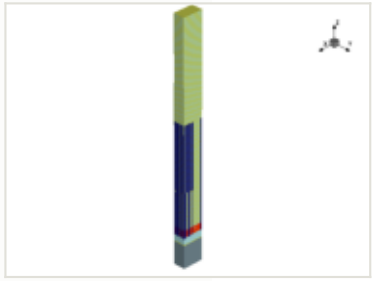



this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

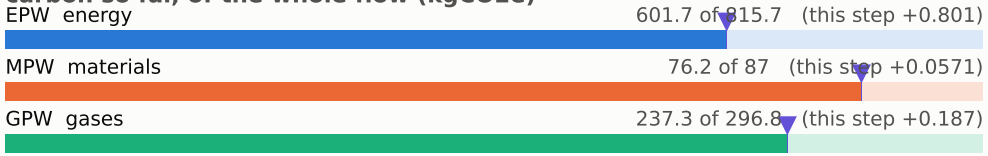

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

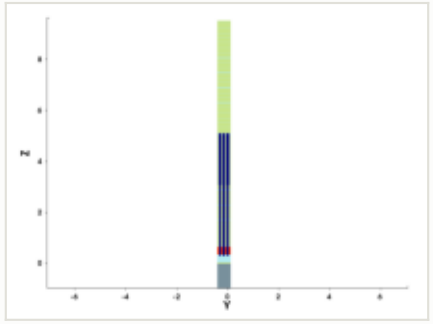

y cut at -0.150 µm

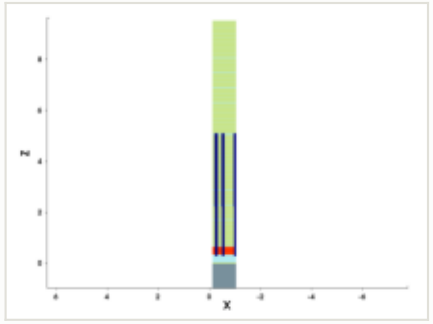

mask for this step

no mask for this step

steps by process area

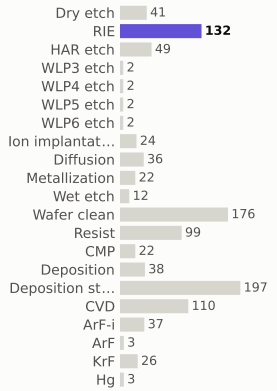

materials deposited (g)



gases emitted (g)



Step #19500: CVD

depo_isotropic · CVD

1.31	916.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

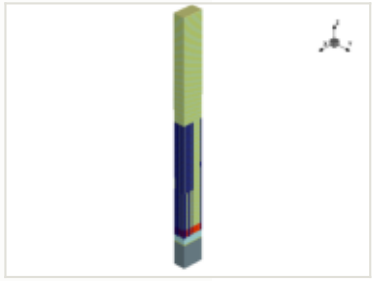

this step

process area	CVD
material	—
thickness	0.034 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

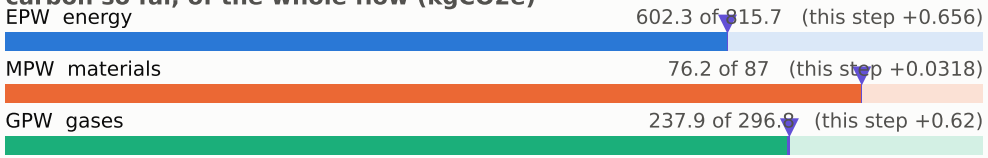

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

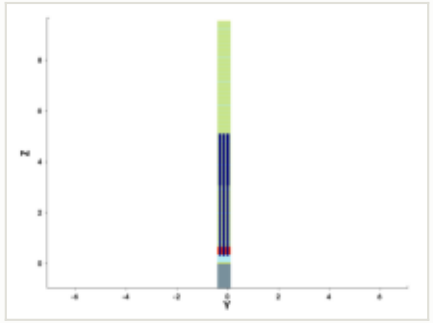

y cut at -0.150 µm

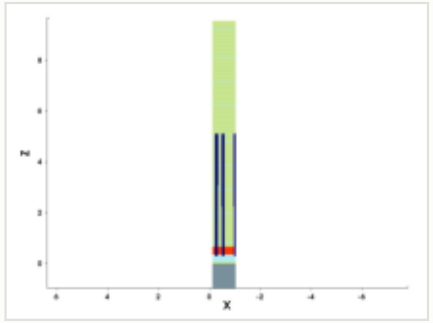

mask for this step

no mask for this step

steps by process area

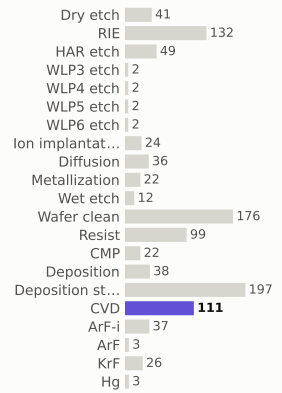

materials deposited (g)

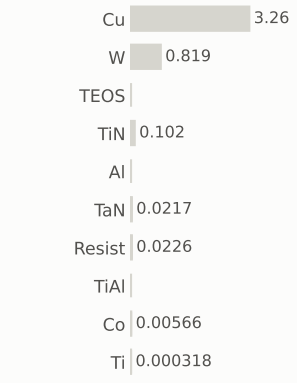

gases emitted (g)

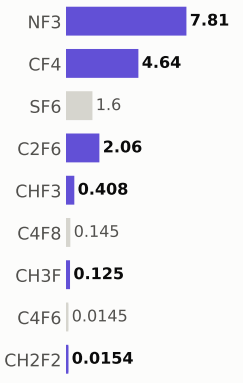

Step #19510: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	917.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

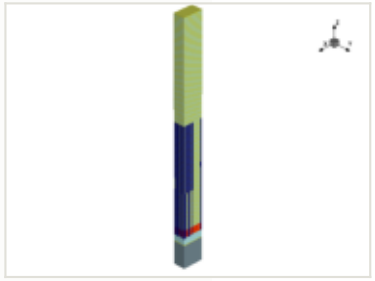

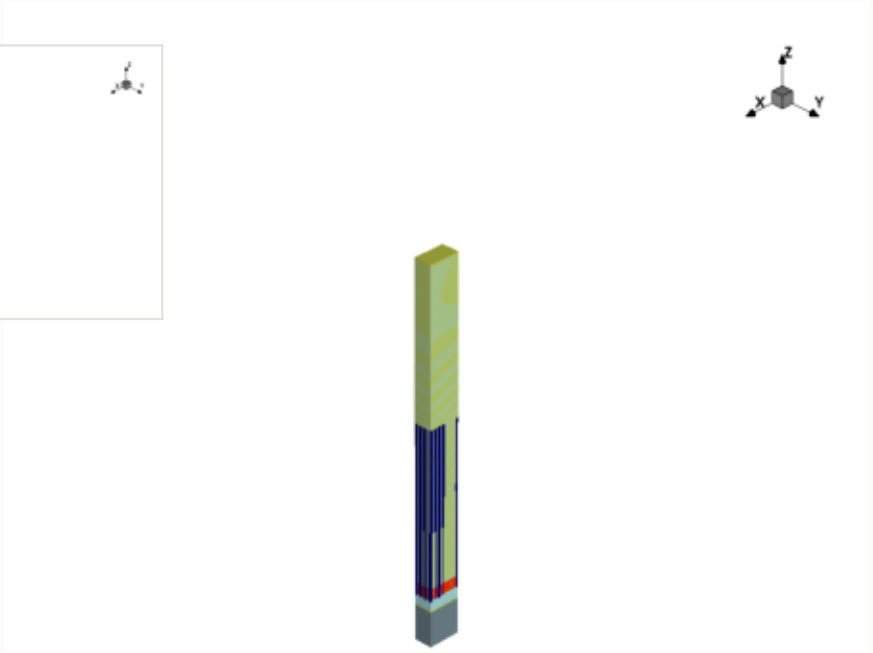

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

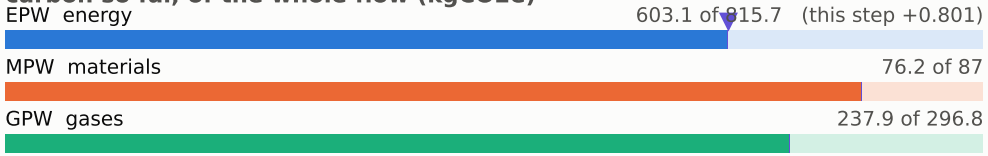

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

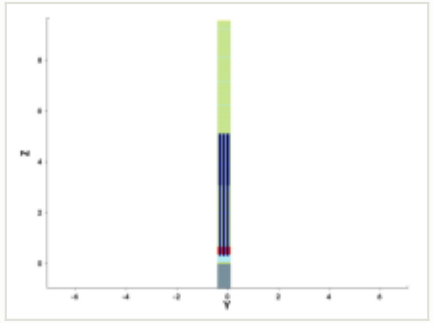

y cut at -0.150 µm

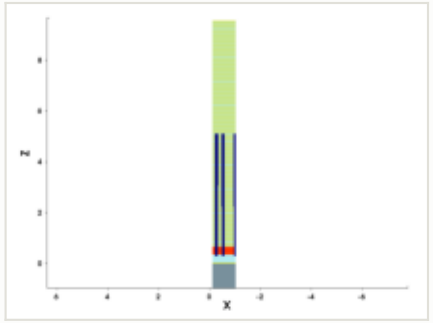

mask for this step

no mask for this step

steps by process area

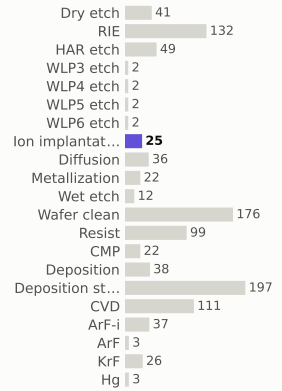

materials deposited (g)

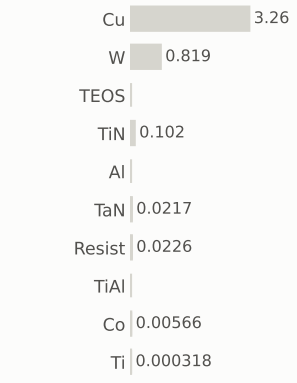

gases emitted (g)

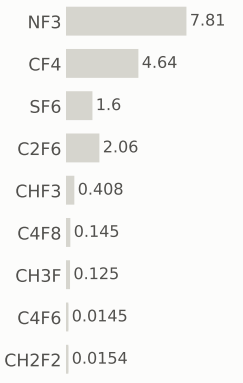

Step #19520: Wet_etch

etch_isotropic · Wet_etch

0.169	917.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

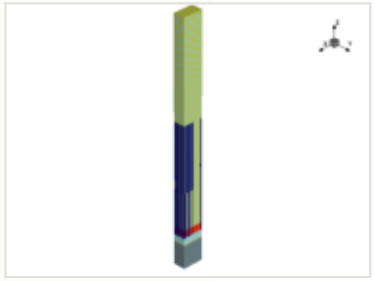

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

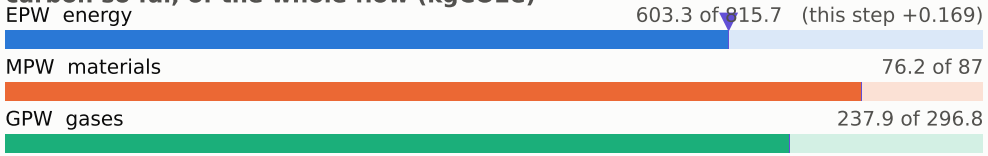

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

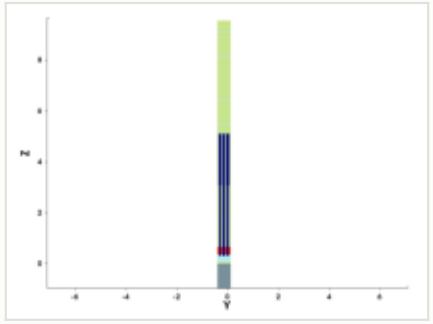

y cut at -0.150 µm

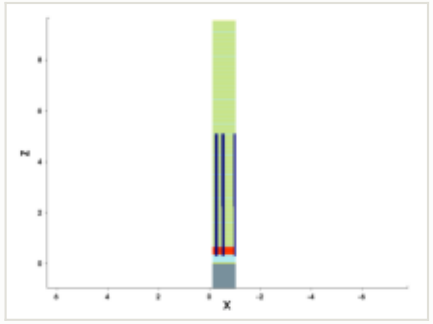

mask for this step

no mask for this step

steps by process area

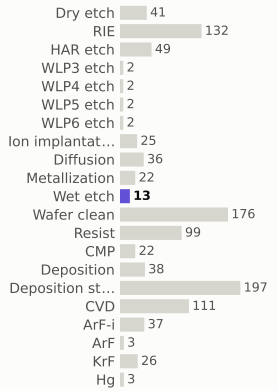

materials deposited (g)

gases emitted (g)



Step #19530: CVD

depo_isotropic · CVD

1.31	918.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

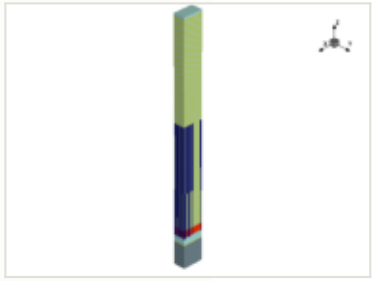

x cut at -0.570 µm

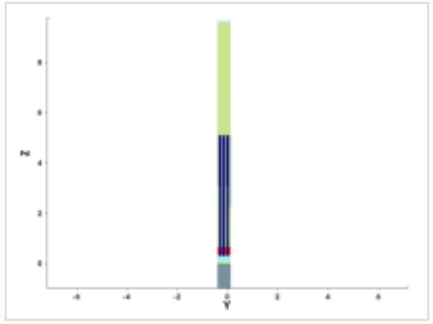

y cut at -0.150 µm

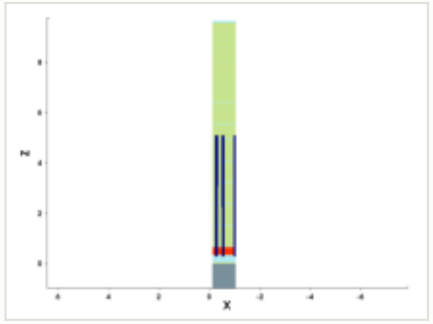

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

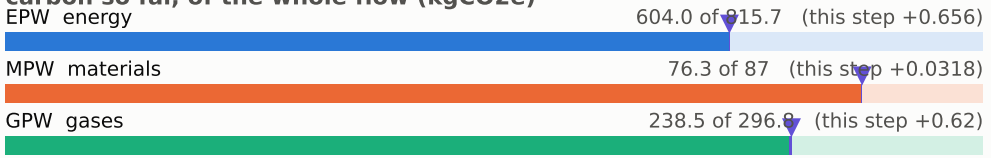

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

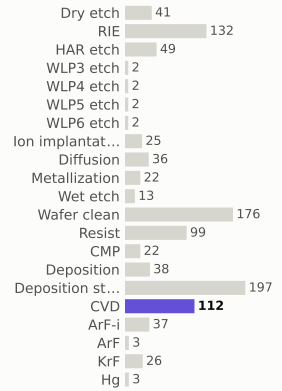

materials deposited (g)

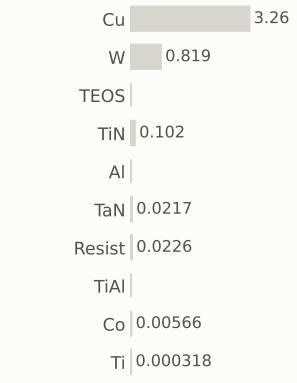

gases emitted (g)

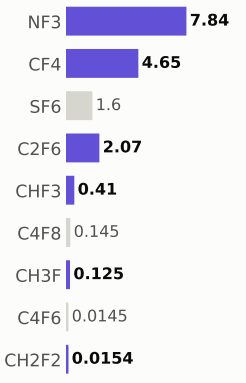

Step #19540: CVD

depo_isotropic · CVD

1.31	920.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD	EPW	0.656 kgCO2e
material	TEOS	EPW tool	0.469 kgCO2e
thickness	10 µm	EPW overhead	0.187 kgCO2e
material GWP	2.85952 gCO2e/g	MPW	0.0336 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

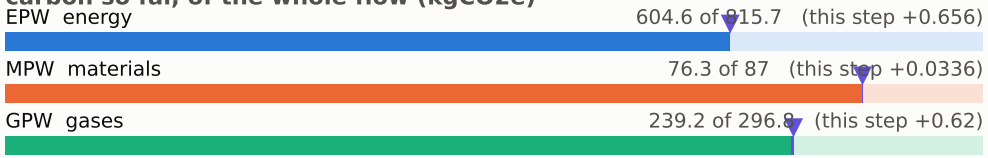

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

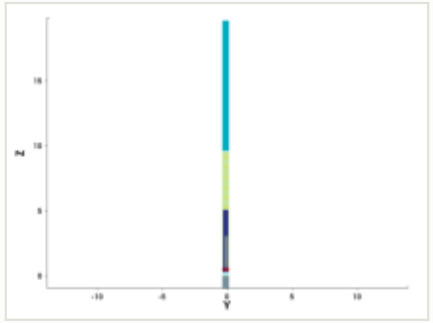

y cut at -0.150 µm

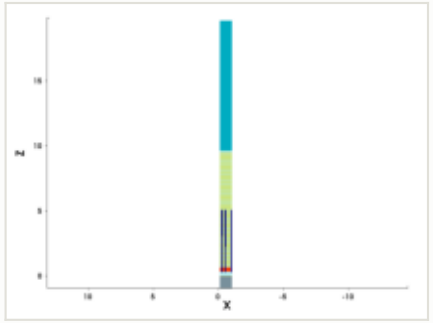

mask for this step

no mask for this step

steps by process area

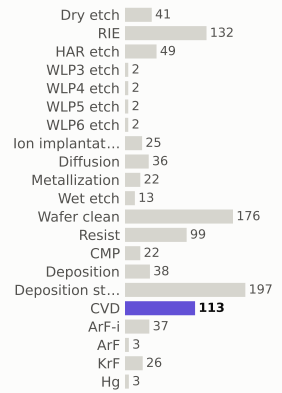

materials deposited (g)

gases emitted (g)

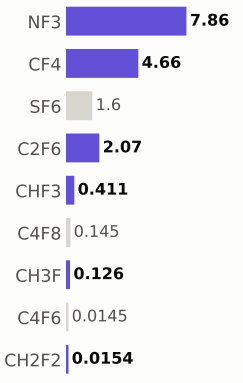

Step #19550: CMP

etch_cmp · CMP

0.169	920.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

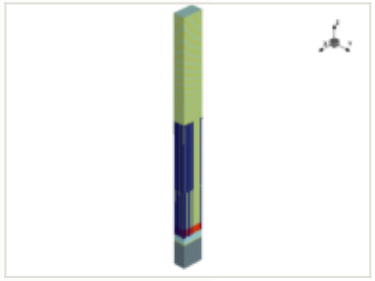

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

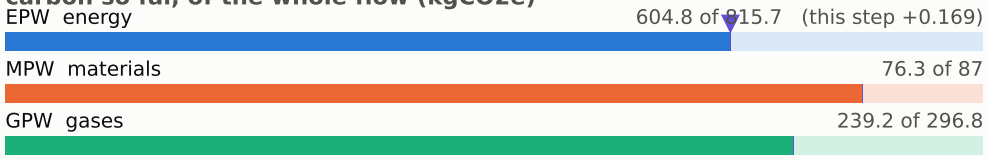

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

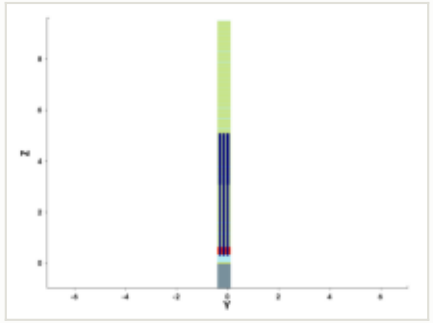

y cut at -0.150 µm

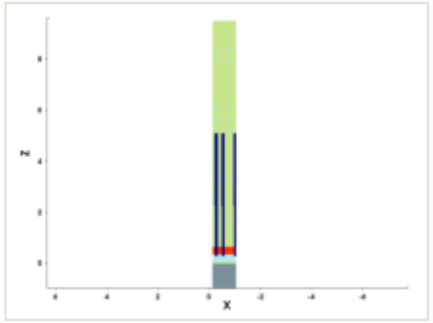

mask for this step

no mask for this step

steps by process area

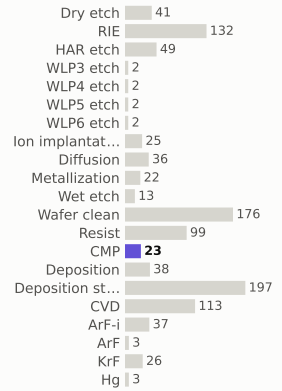

materials deposited (g)

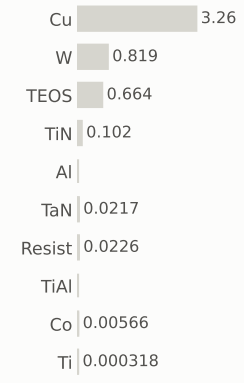

gases emitted (g)

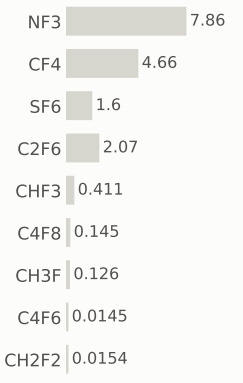

Step #19560: Wafer_clean

clean · Wafer_clean

0.169	920.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

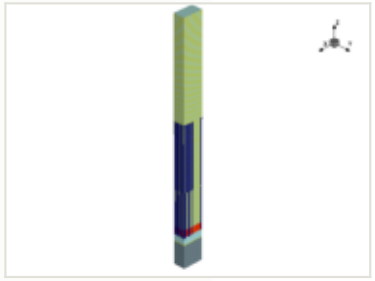

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

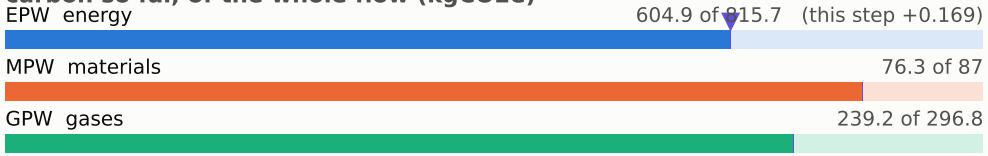

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

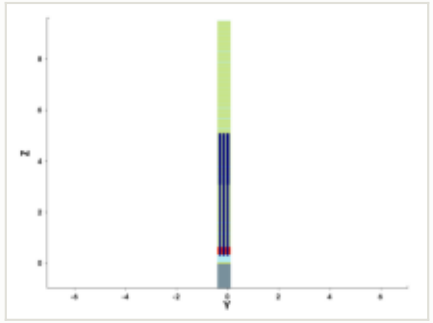

y cut at -0.150 µm

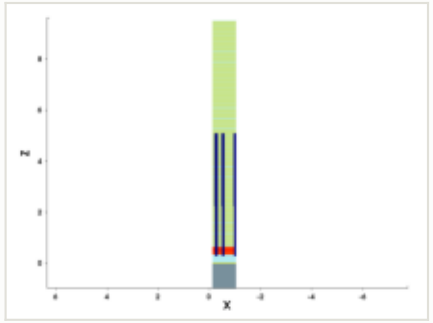

mask for this step

no mask for this step

steps by process area

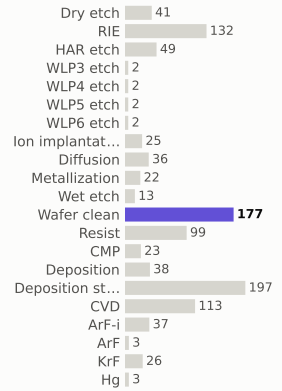

materials deposited (g)

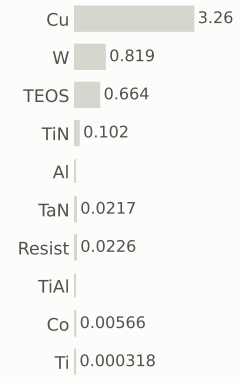

gases emitted (g)

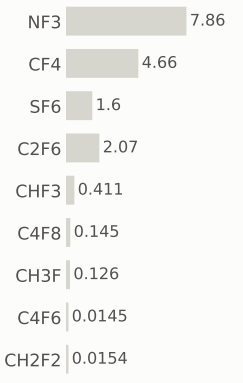

Step #19570: CVD

depo_isotropic · CVD

1.31	921.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

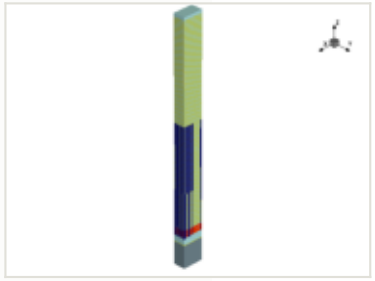

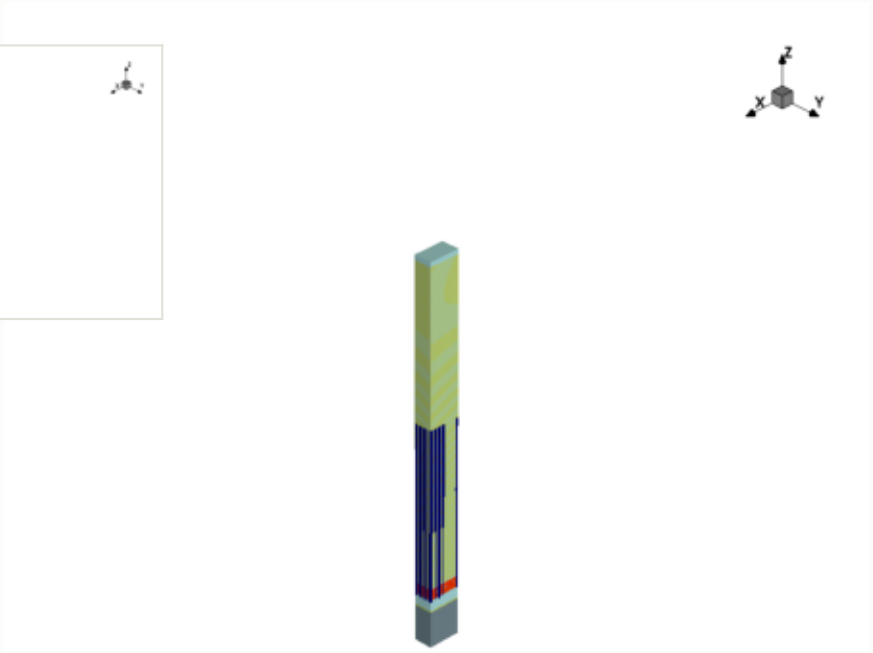

x cut at -0.570 µm

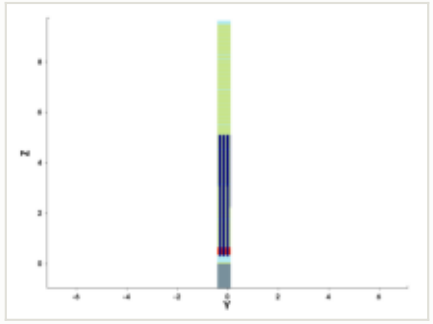

y cut at -0.150 µm

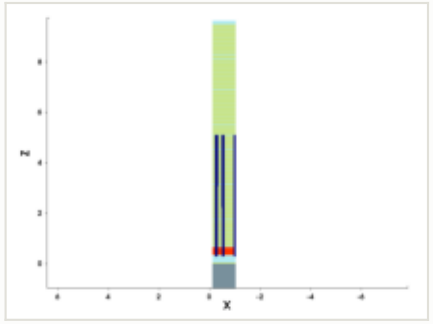

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.13 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

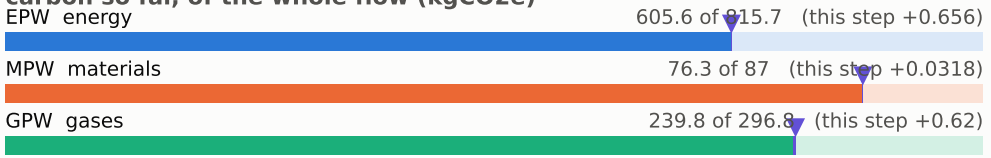

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

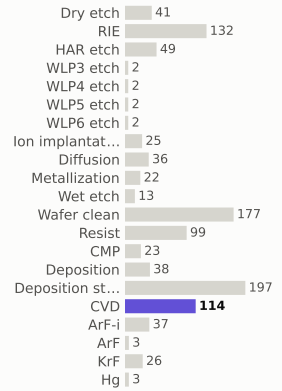

materials deposited (g)

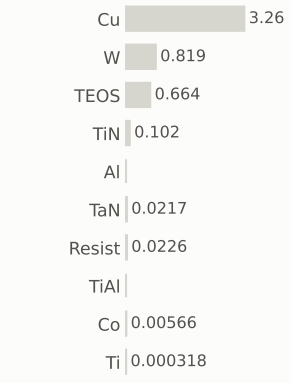

gases emitted (g)

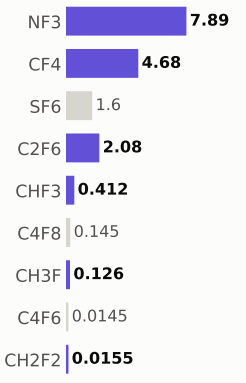

Step #19590: CVD

depo_isotropic · CVD

1.31	923.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

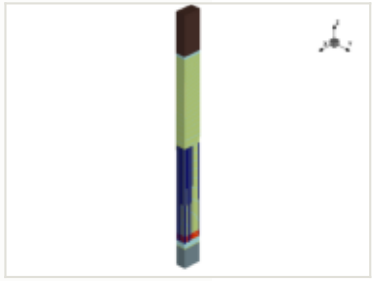

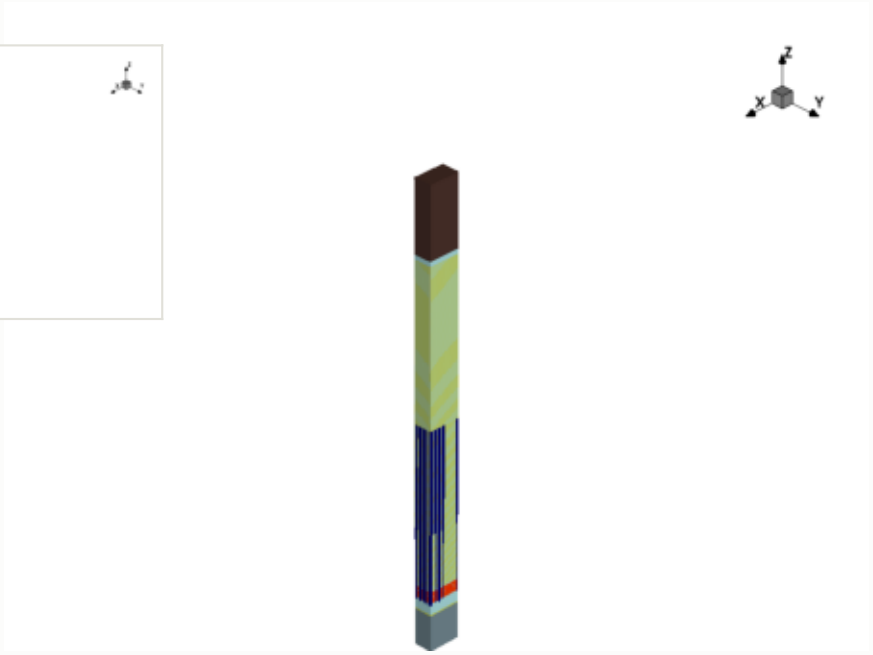

x cut at -0.570 µm

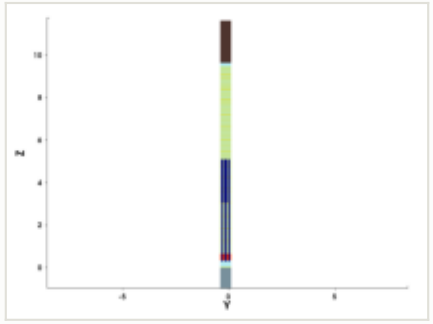

y cut at -0.150 µm

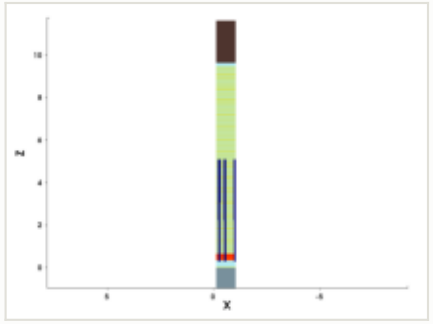

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

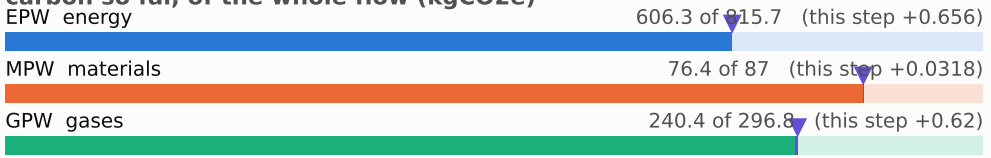

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

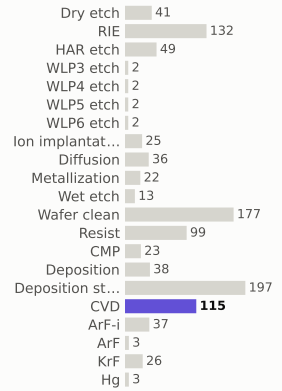

materials deposited (g)

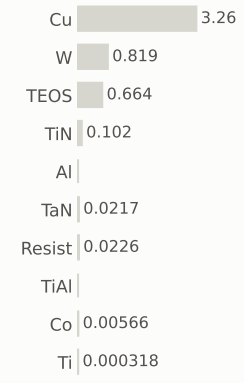

gases emitted (g)

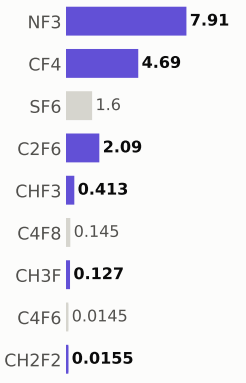

Step #19600: CVD

depo_isotropic · CVD

1.31	924.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

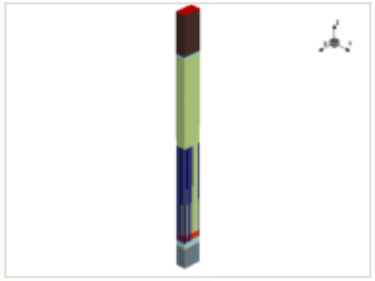

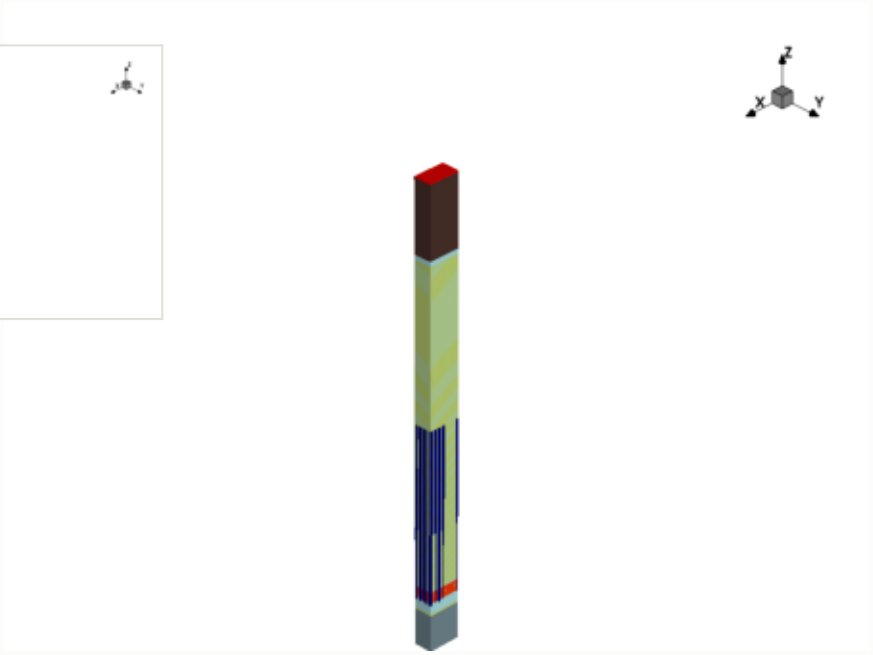

x cut at -0.570 µm

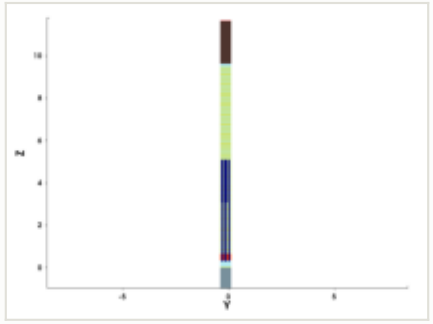

y cut at -0.150 µm

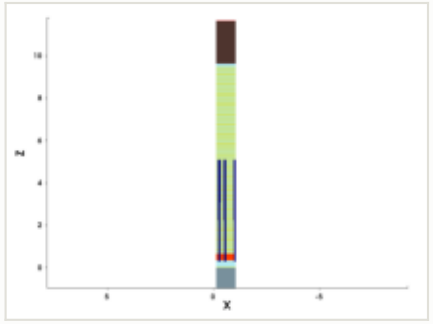

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

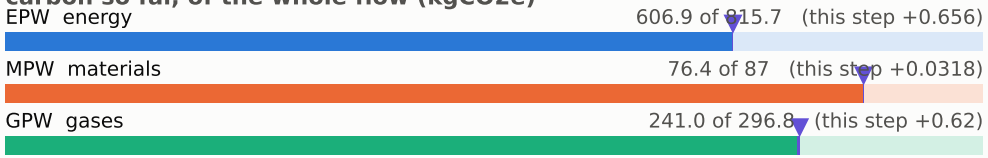

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

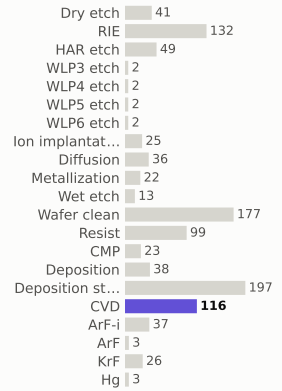

materials deposited (g)

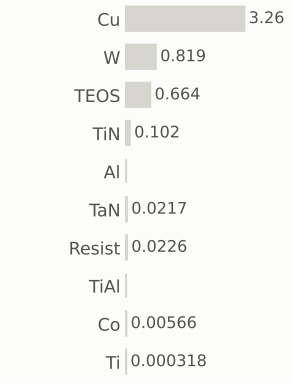

gases emitted (g)

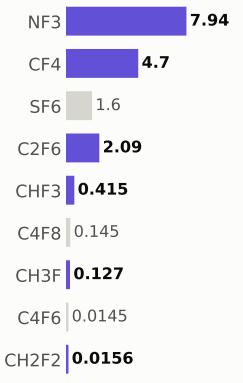

Step #19610: Wafer_clean

clean · Wafer_clean

0.169	924.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

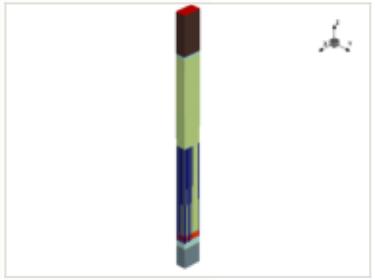

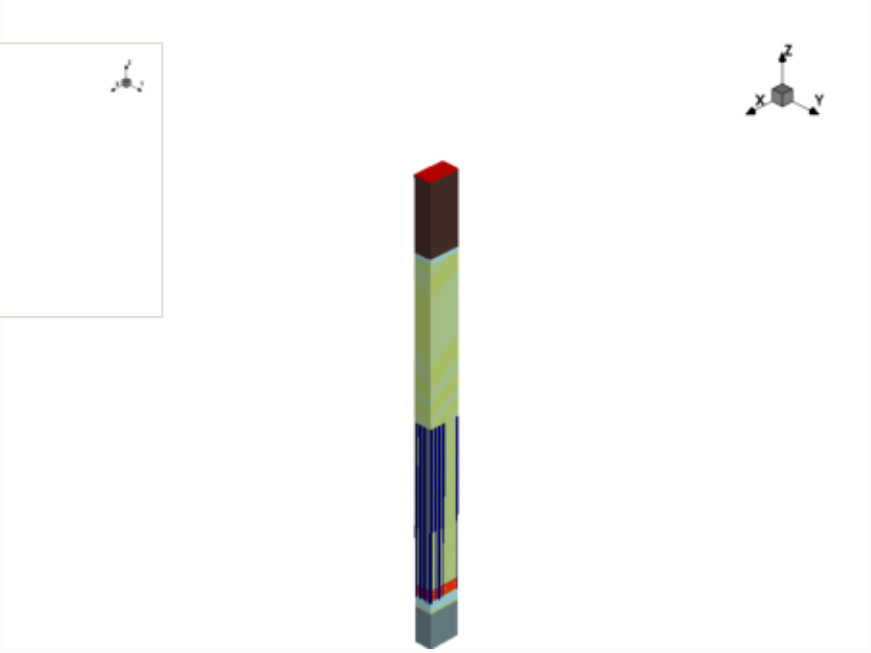

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

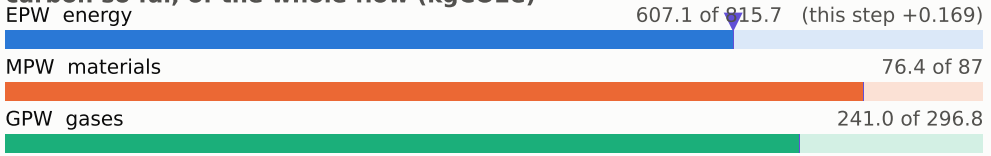

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

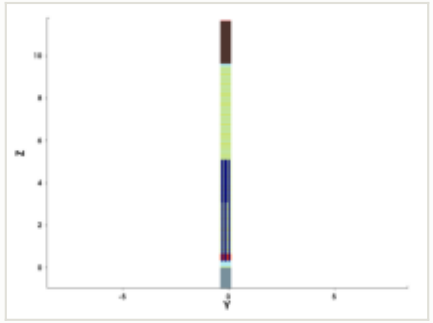

y cut at -0.150 µm

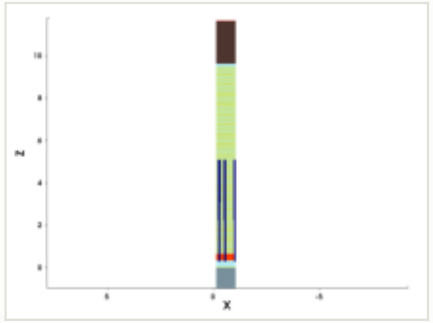

mask for this step

no mask for this step

steps by process area

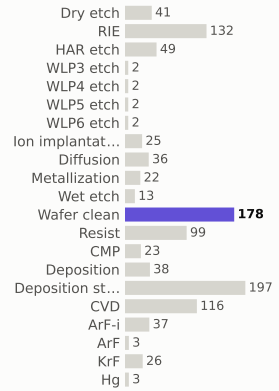

materials deposited (g)

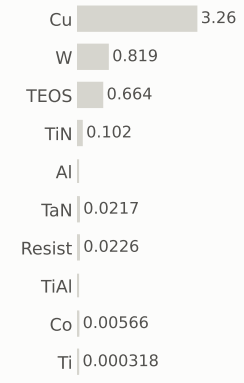

gases emitted (g)

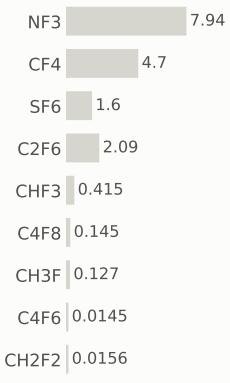

Step #19620: ArF-i

litho_patterning · ArF-i

0.217	924.7	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

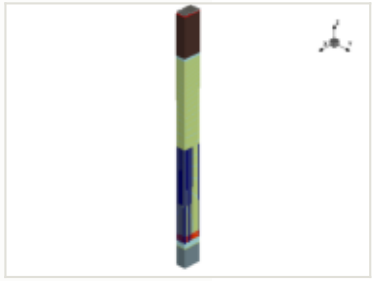

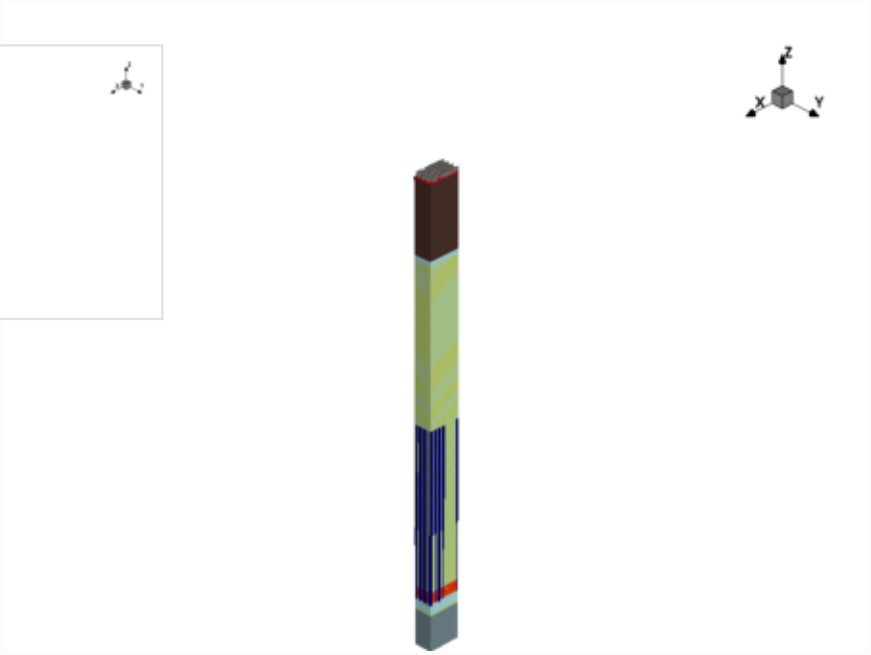

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

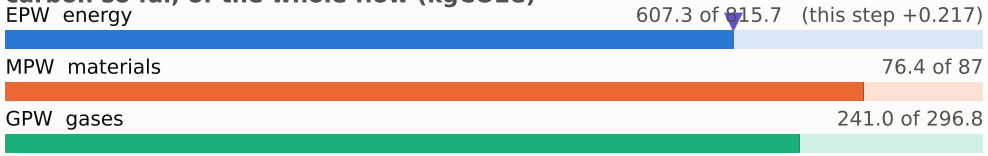

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

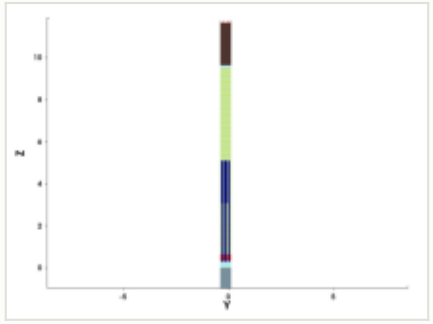

y cut at -0.150 µm

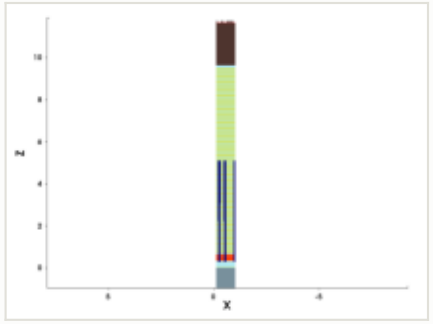

mask: layer 35:0, negative (GDSII)

steps by process area

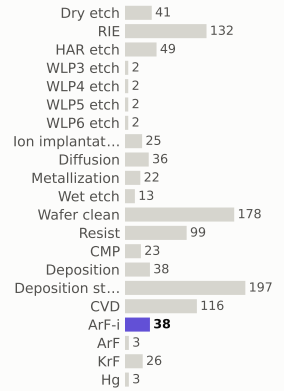

materials deposited (g)

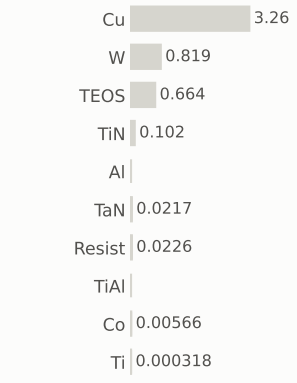

gases emitted (g)

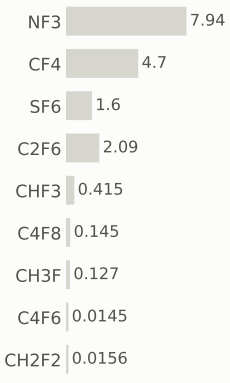

Step #19630: RIE

etch_anisotropic · RIE

1.04	925.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

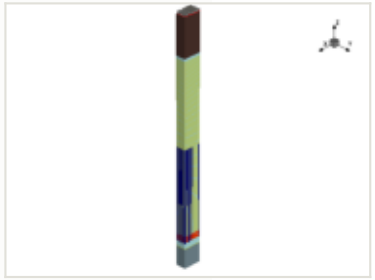

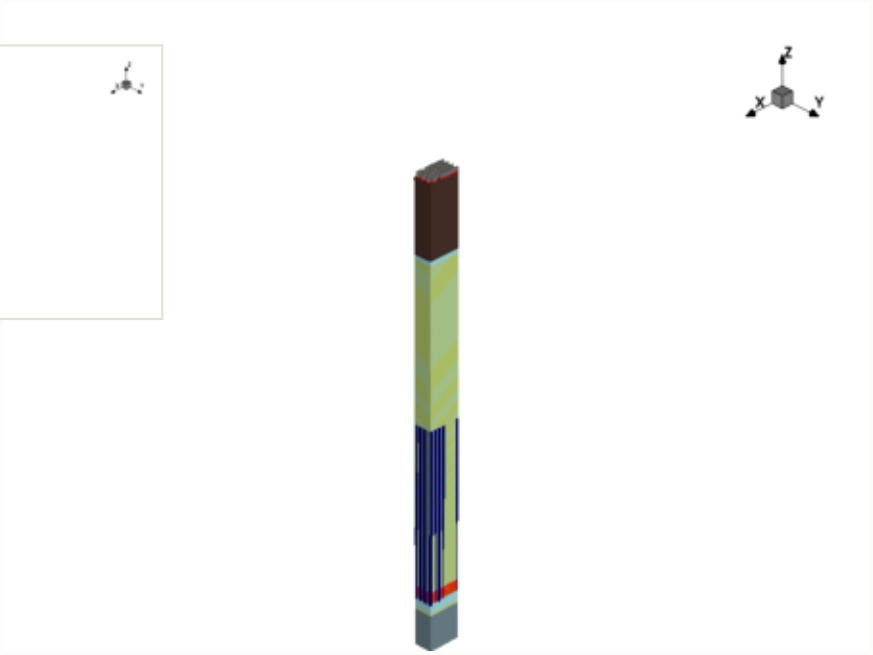

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

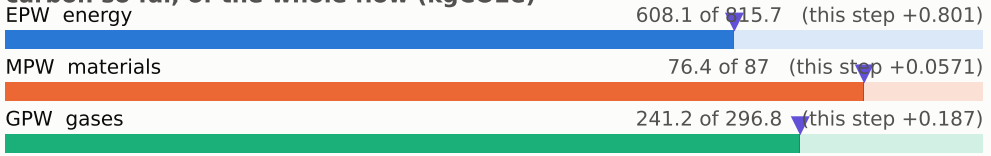

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

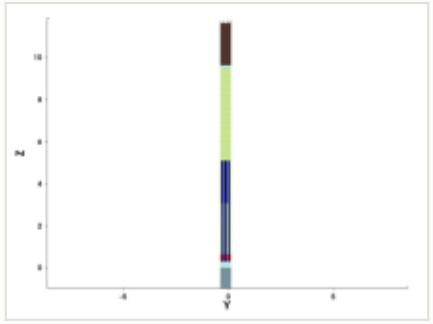

y cut at -0.150 µm

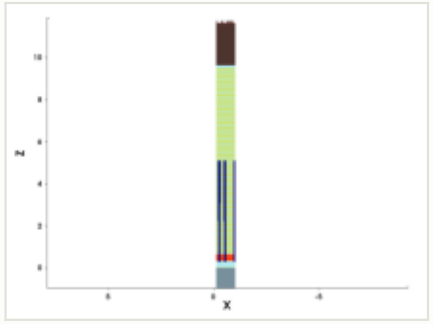

mask for this step

no mask for this step

steps by process area

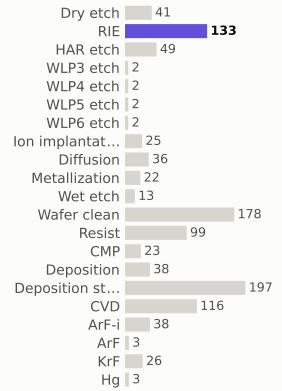

materials deposited (g)

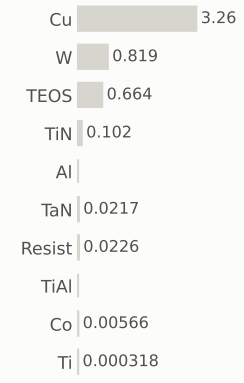

gases emitted (g)

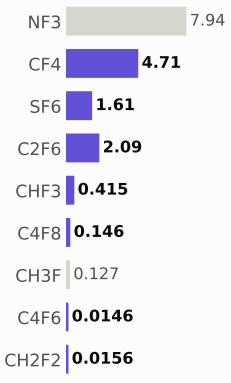

Step #19640: RIE

etch_anisotropic · RIE

1.04	926.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

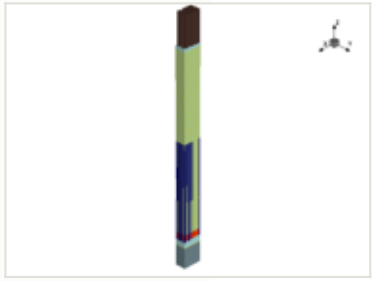

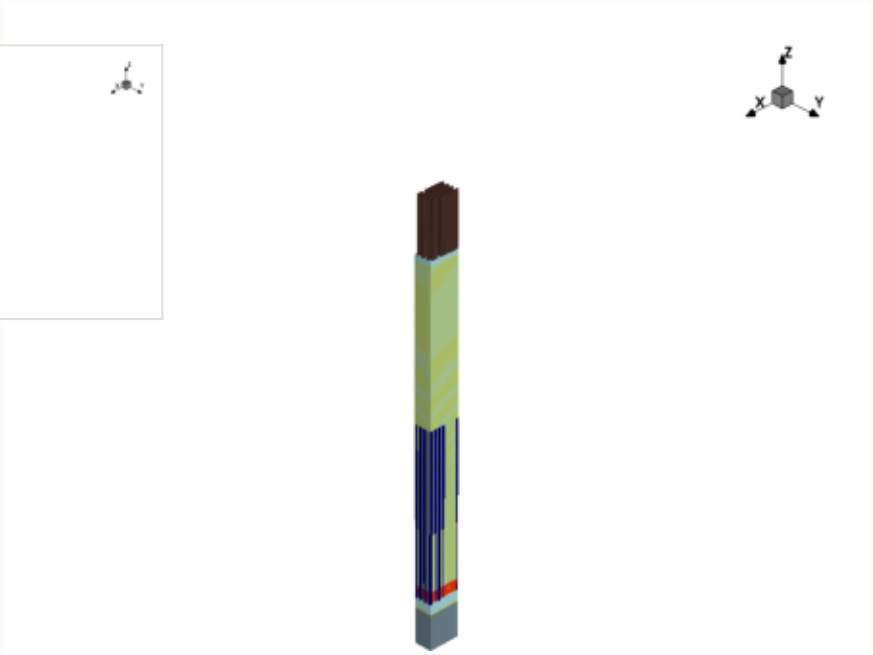

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

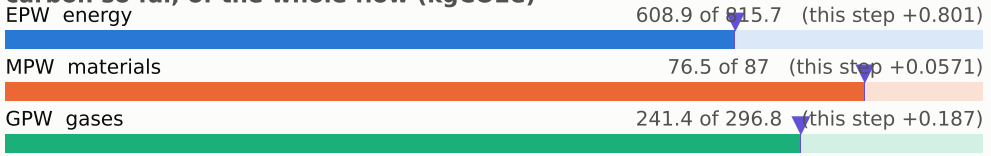

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

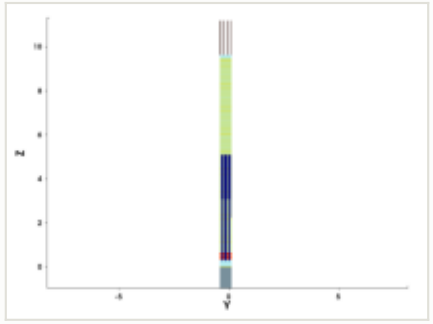

y cut at -0.150 µm

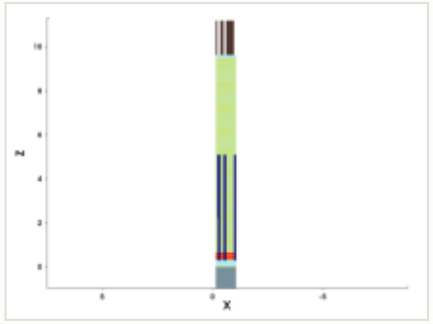

mask for this step

no mask for this step

steps by process area

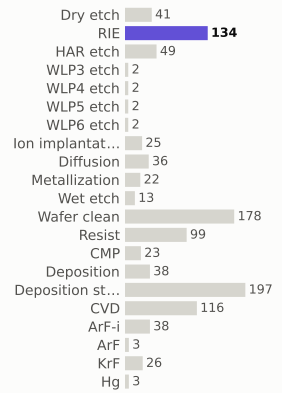

materials deposited (g)

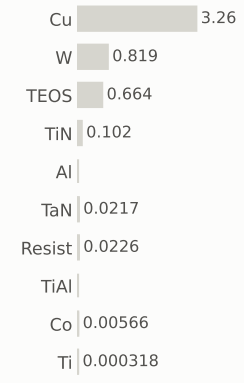

gases emitted (g)

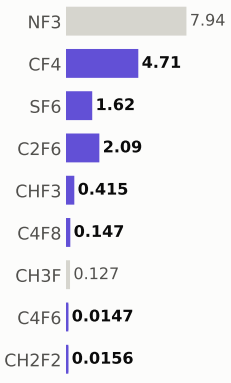

Step #19650: RIE

etch_anisotropic · RIE

1.04	927.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

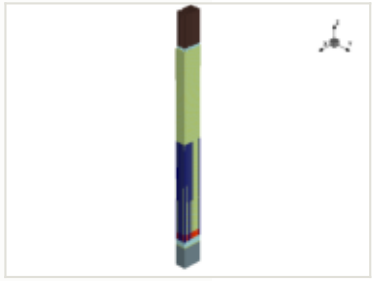

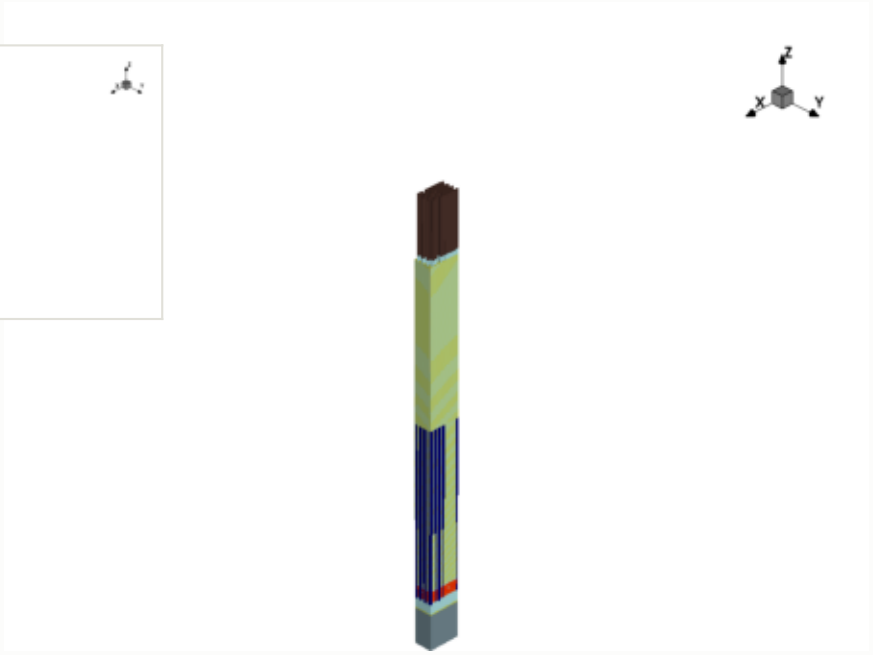

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

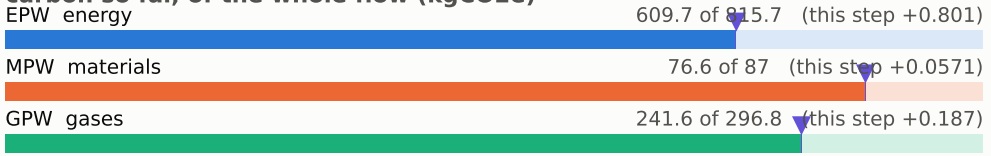

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

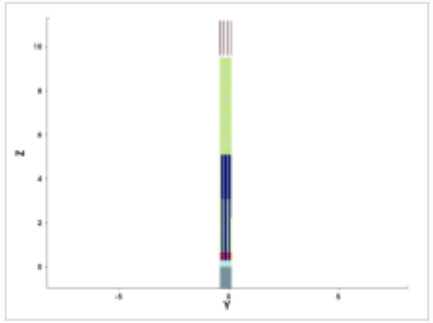

y cut at -0.150 µm

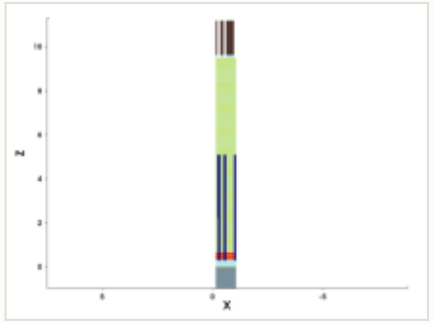

mask for this step

no mask for this step

steps by process area

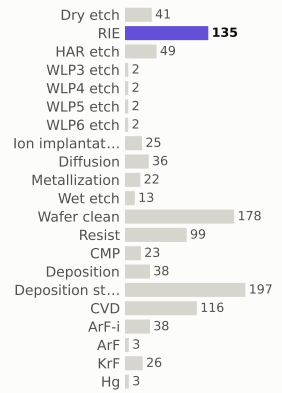

materials deposited (g)

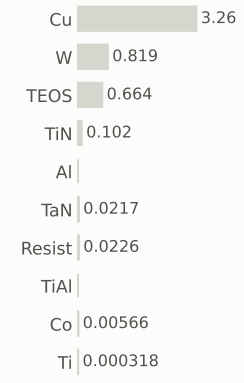

gases emitted (g)

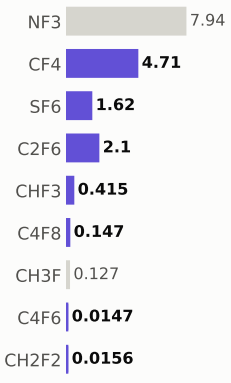

Step #19660: HAR_etch

etch_anisotropic · HAR_etch

1.04	928.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

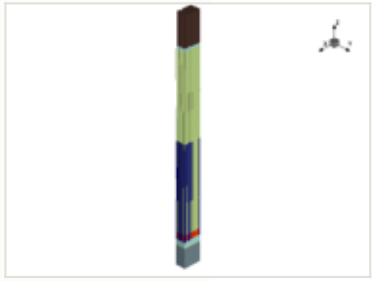

x cut at -0.570 µm

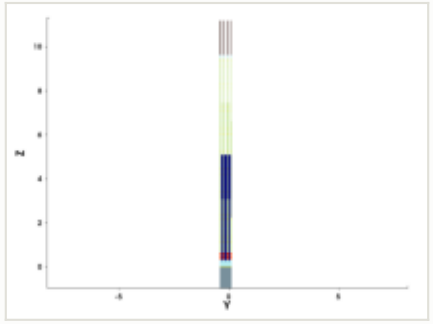

y cut at -0.150 µm

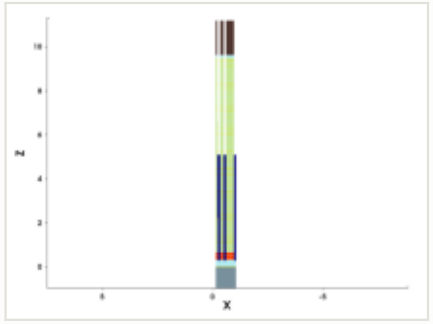

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

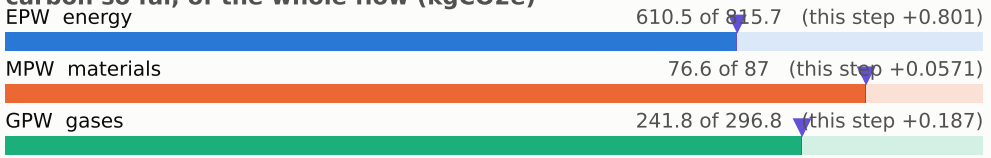

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

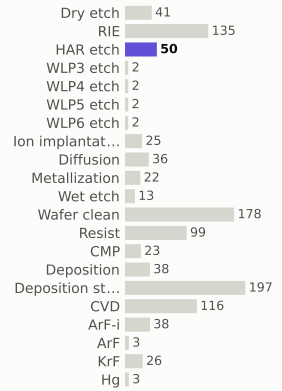

materials deposited (g)

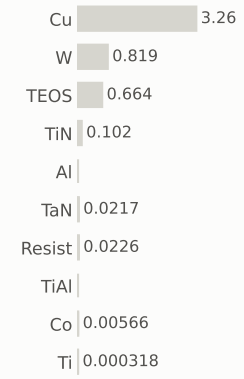

gases emitted (g)

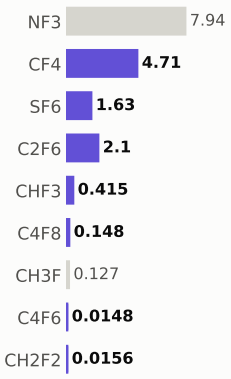

Step #19660.102: HAR_etch

etch_noop · HAR_etch

1.04	929.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

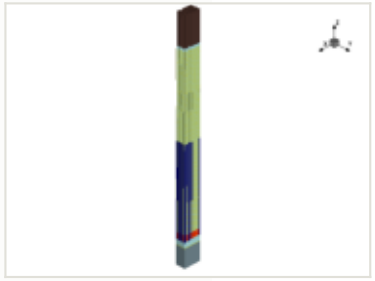

x cut at -0.570 µm

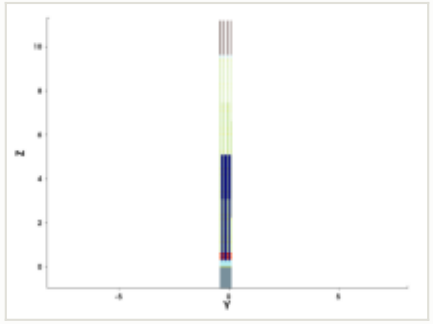

y cut at -0.150 µm

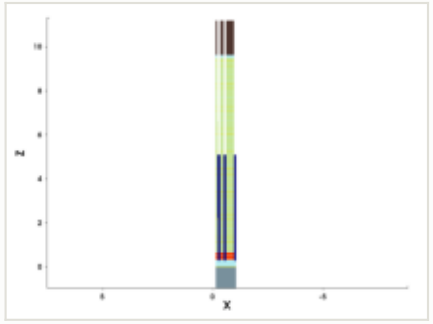

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

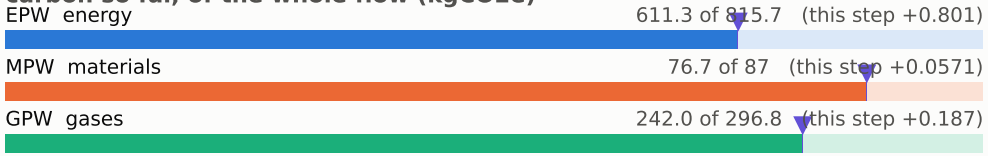

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

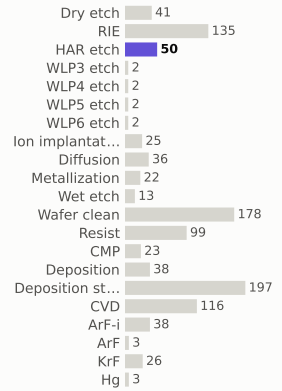

materials deposited (g)

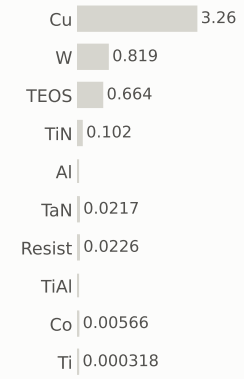

gases emitted (g)

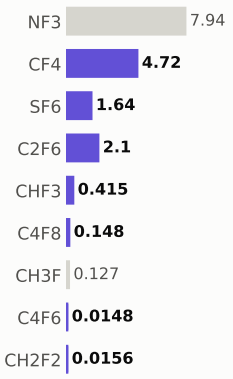

Step #19660.204100000003: HAR_etch

etch_noop · HAR_etch

1.04	931.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

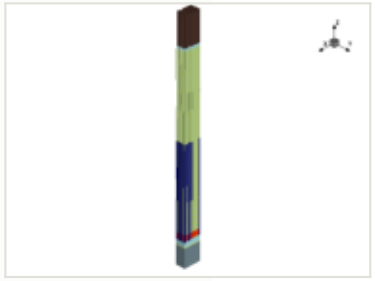

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

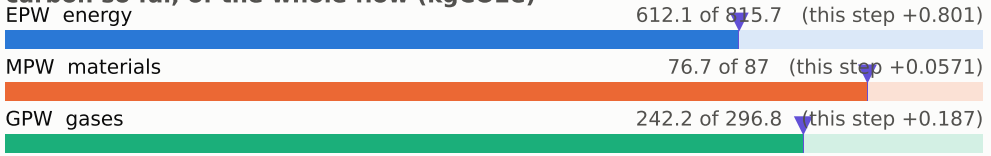

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

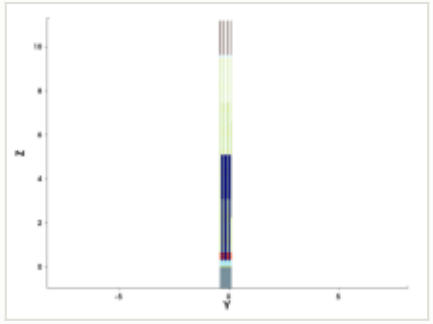

y cut at -0.150 µm

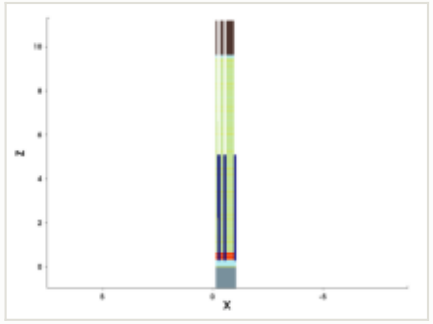

mask for this step

no mask for this step

steps by process area

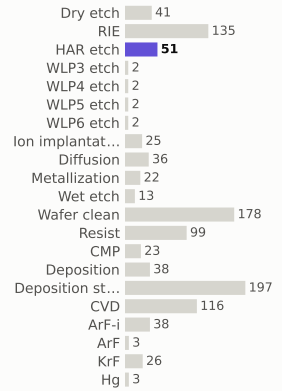

materials deposited (g)

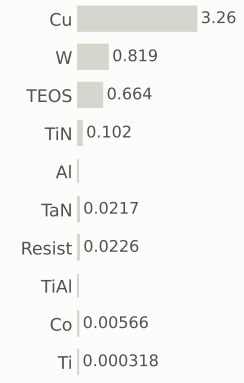

gases emitted (g)

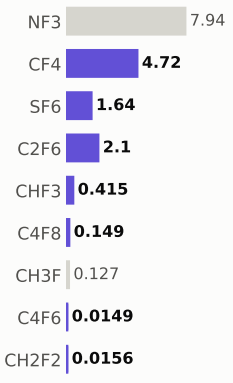

Step #19660.3061: HAR_etch

etch_noop · HAR_etch

1.04	932.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

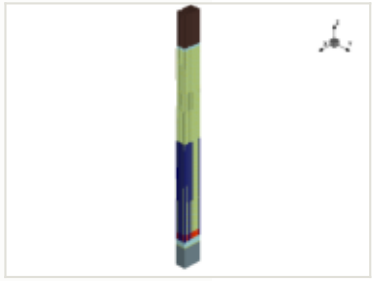

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

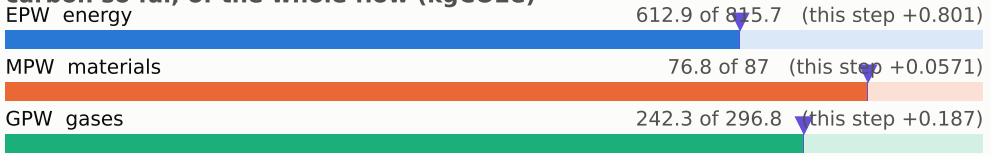

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

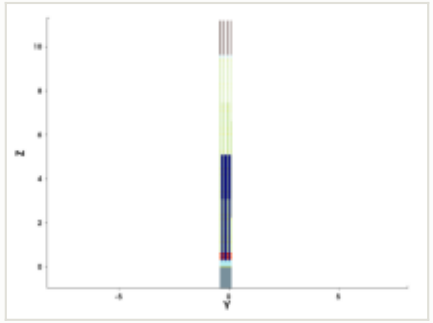

y cut at -0.150 µm

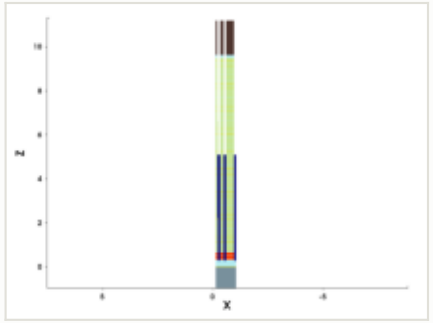

mask for this step

no mask for this step

steps by process area

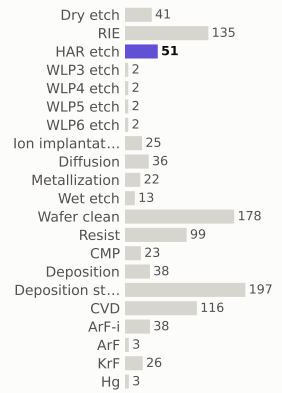

materials deposited (g)

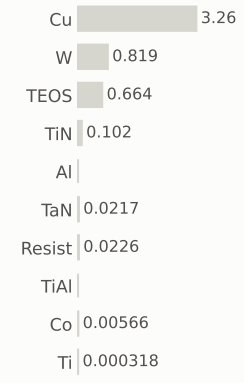

gases emitted (g)

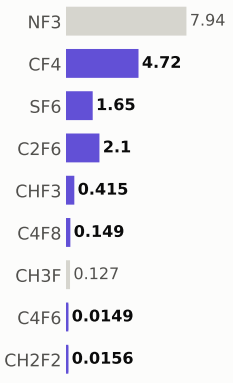

Step #19660.408199999998: HAR_etch

etch_noop · HAR_etch

1.04	933.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

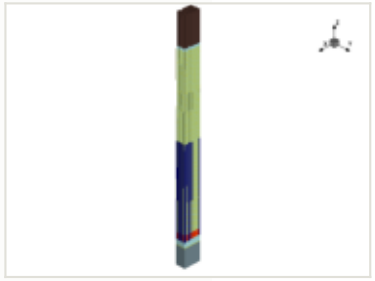

x cut at -0.570 µm

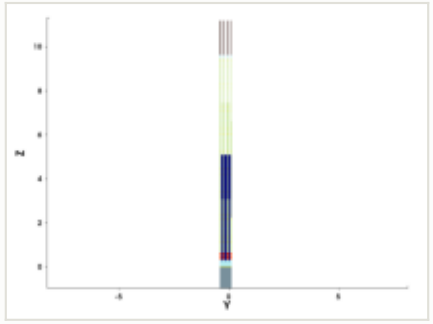

y cut at -0.150 µm

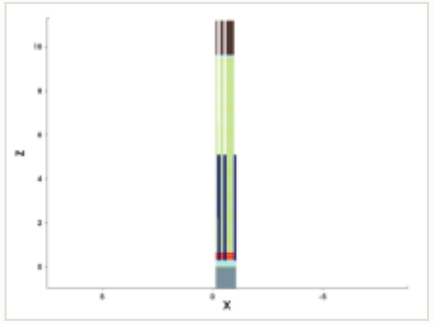

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

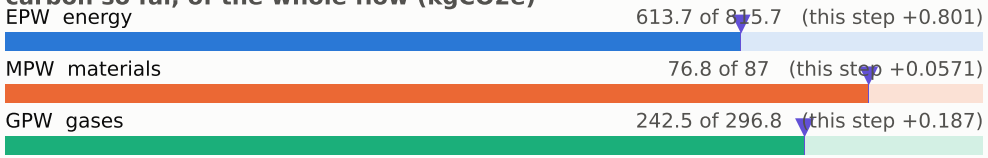

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

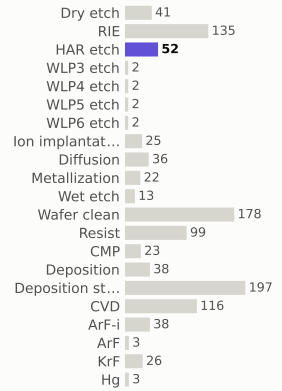

materials deposited (g)

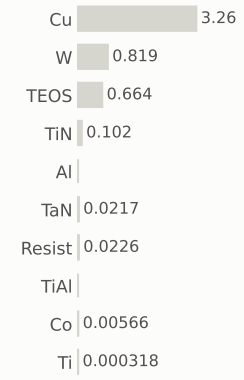

gases emitted (g)

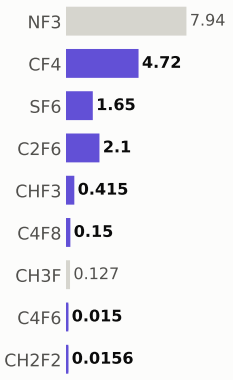

Step #19660.5102: HAR_etch

etch_noop · HAR_etch

1.04	934.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

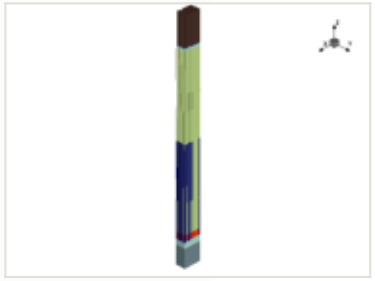

x cut at -0.570 µm

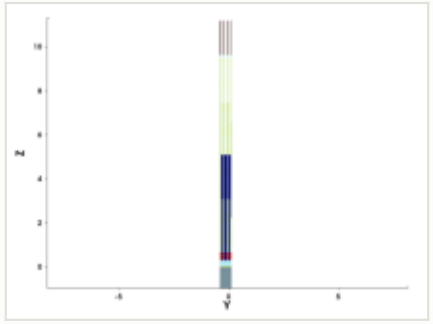

y cut at -0.150 µm

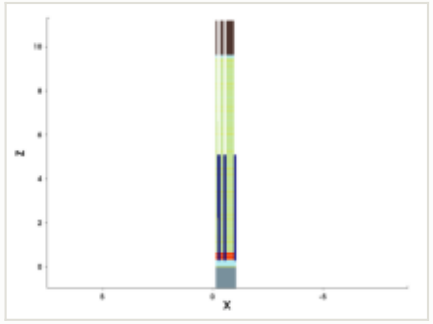

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

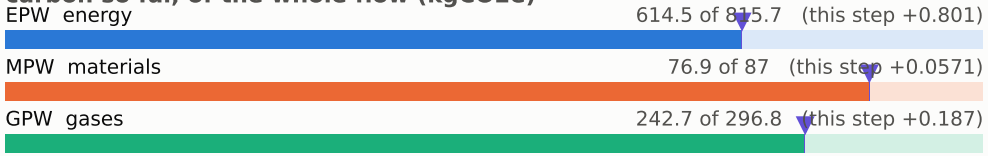

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

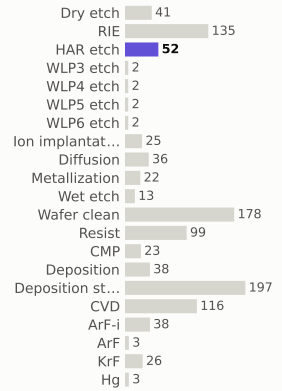

materials deposited (g)

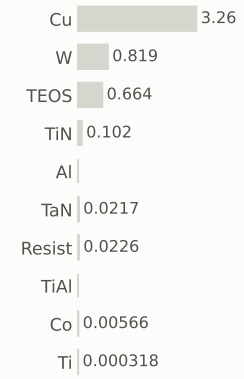

gases emitted (g)

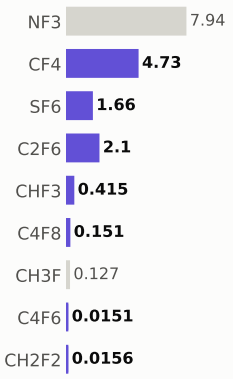

Step #19660.6122: HAR_etch

etch_noop · HAR_etch

1.04	935.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

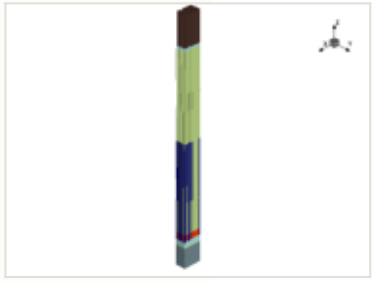

x cut at -0.570 µm

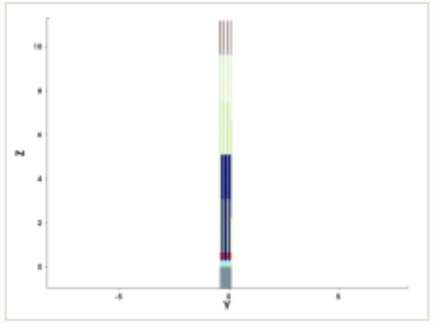

y cut at -0.150 µm

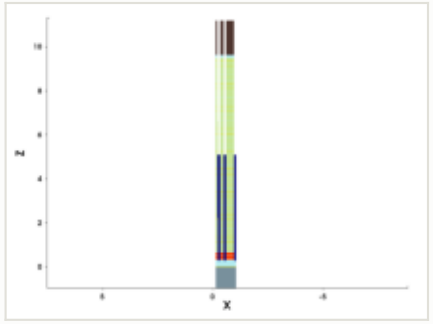

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

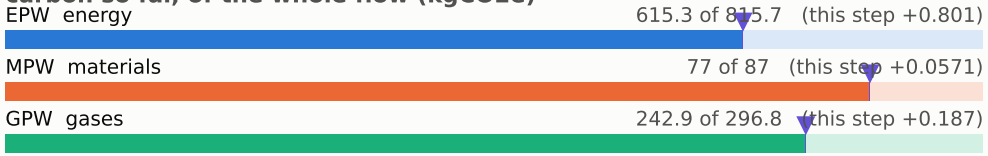

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

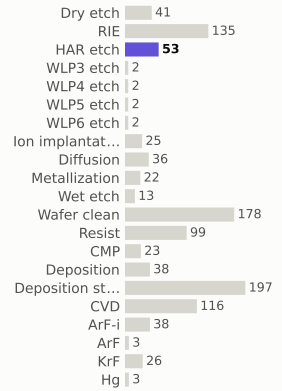

materials deposited (g)

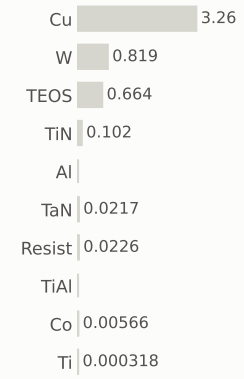

gases emitted (g)

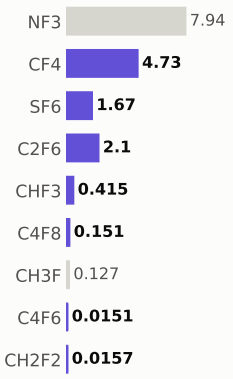

Step #19660.7143: HAR_etch

etch_noop · HAR_etch

1.04	936.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

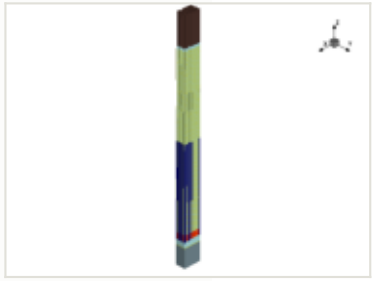

x cut at -0.570 µm

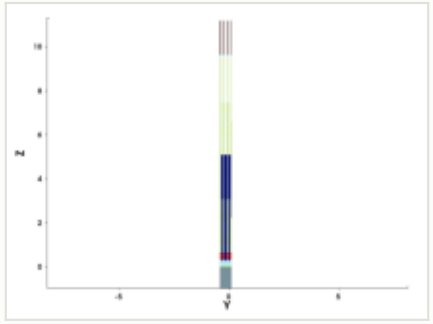

y cut at -0.150 µm

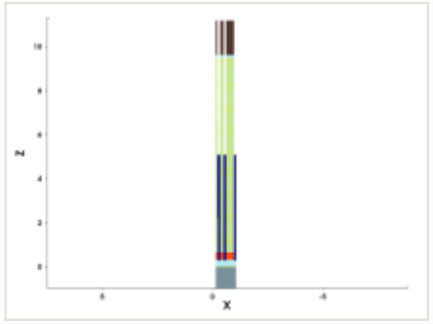

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

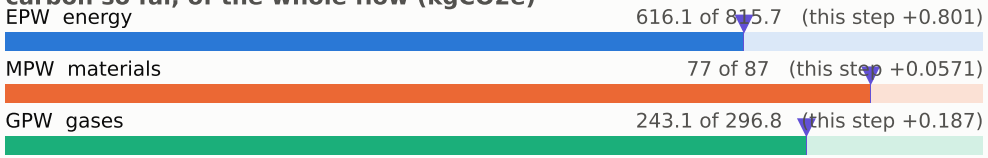

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

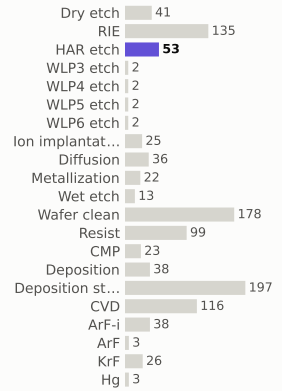

materials deposited (g)

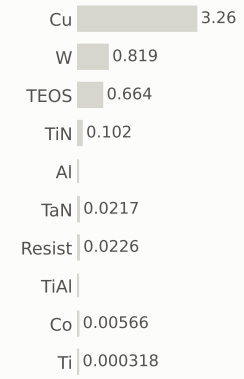

gases emitted (g)

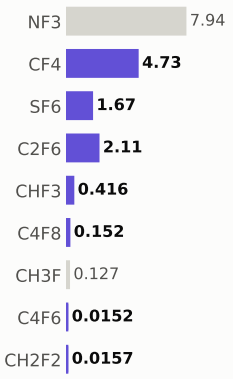

Step #19660.8163: HAR_etch

etch_noop · HAR_etch

1.04	937.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

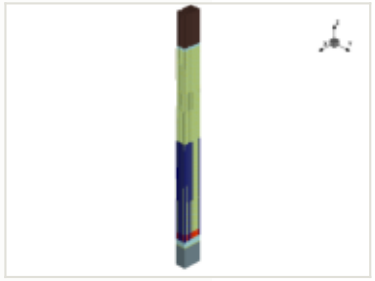

x cut at -0.570 µm

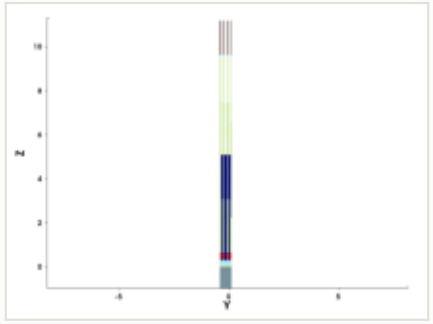

y cut at -0.150 µm

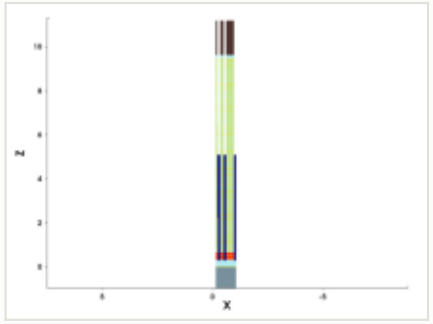

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

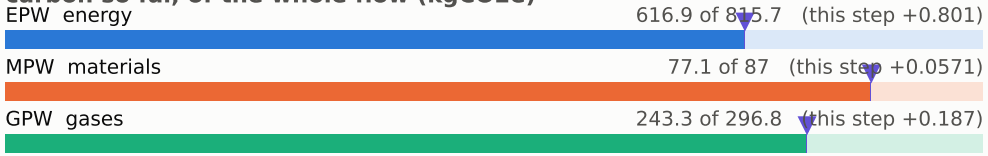

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

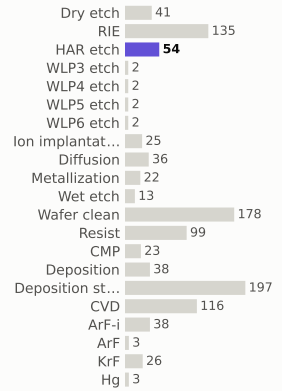

materials deposited (g)

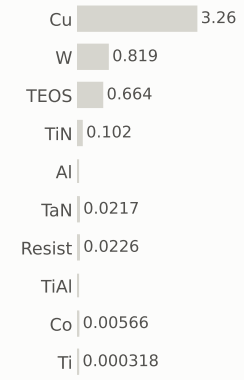

gases emitted (g)

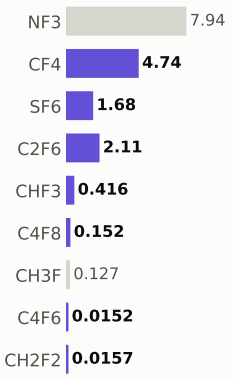

Step #19660.918400000002: HAR_etch

etch_noop · HAR_etch

1.04	938.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

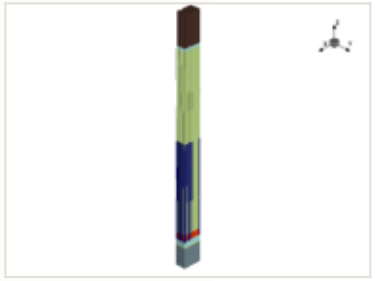

x cut at -0.570 µm

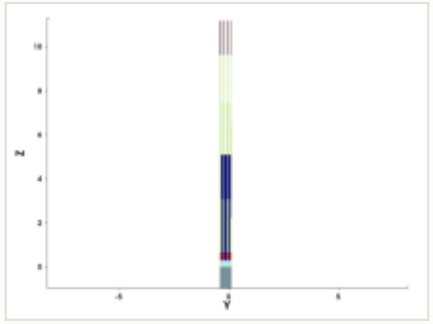

y cut at -0.150 µm

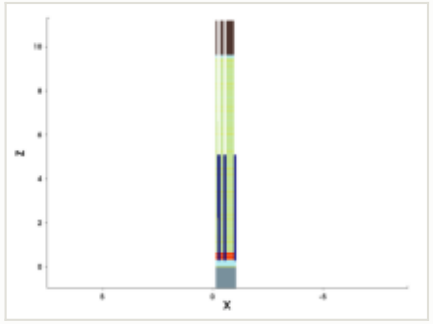

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

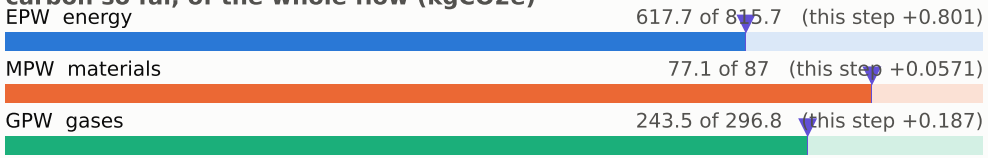

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

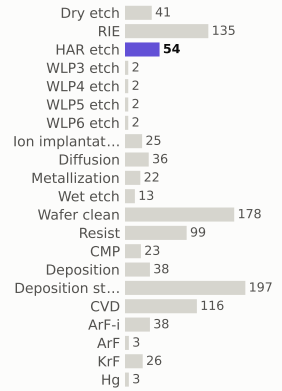

materials deposited (g)

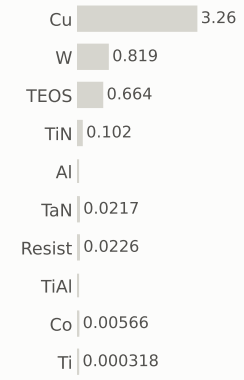

gases emitted (g)

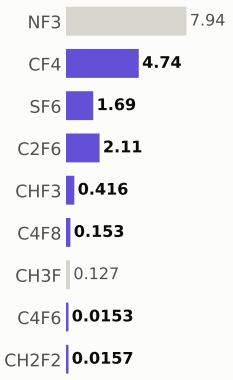

Step #19661.0204: HAR_etch

etch_noop · HAR_etch

1.04	939.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

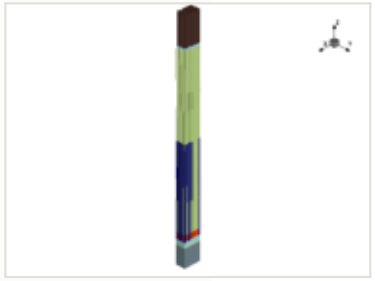

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

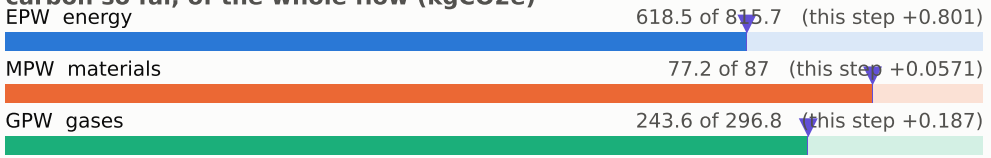

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

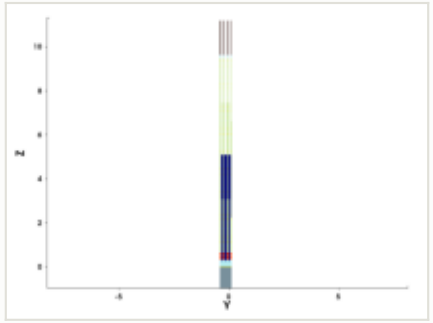

y cut at -0.150 µm

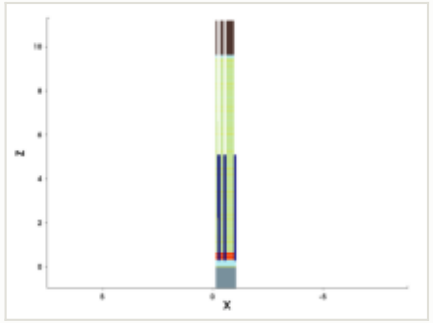

mask for this step

no mask for this step

steps by process area

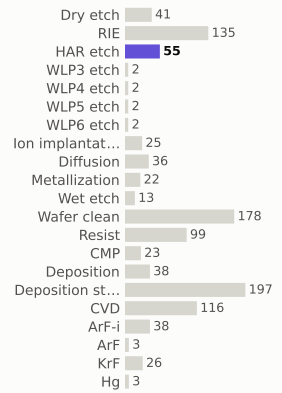

materials deposited (g)

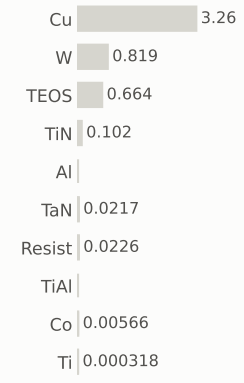

gases emitted (g)

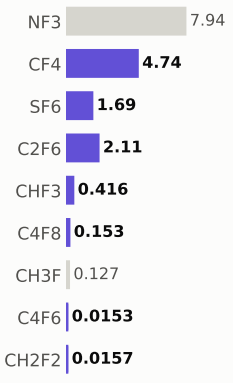

Step #19661.1224: HAR_etch

etch_noop · HAR_etch

1.04	940.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

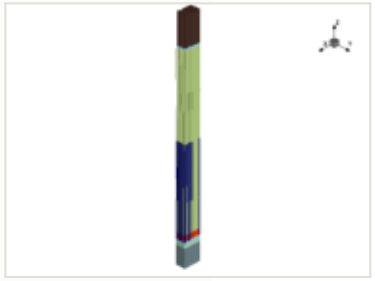

x cut at -0.570 µm

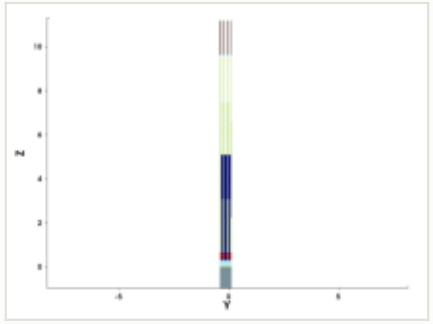

y cut at -0.150 µm

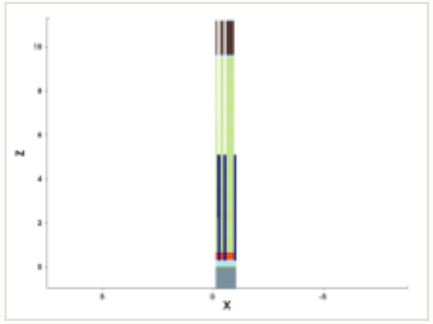

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

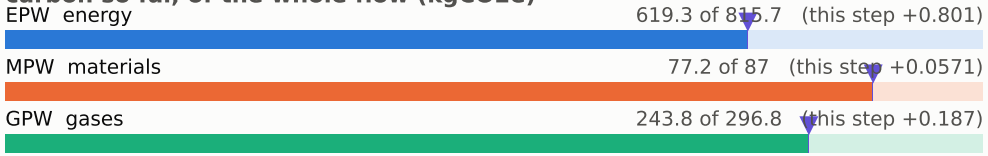

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

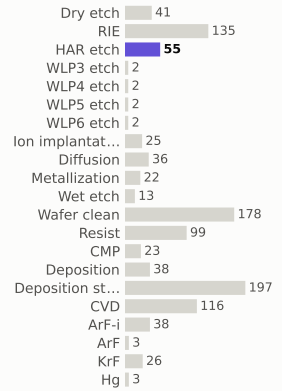

materials deposited (g)

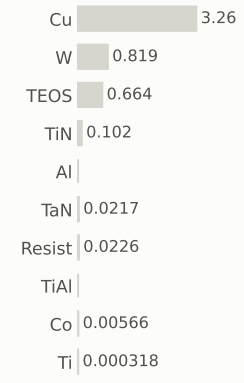

gases emitted (g)

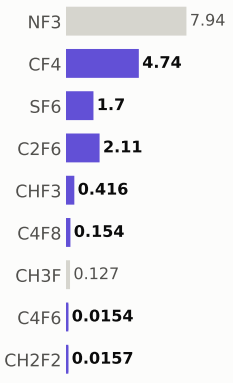

Step #19661.2245: HAR_etch

etch_noop · HAR_etch

1.04	941.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

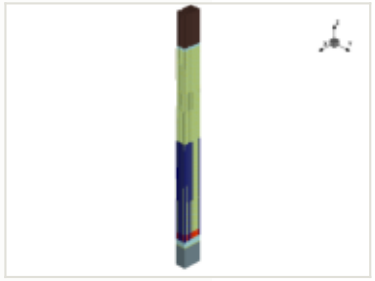

x cut at -0.570 µm

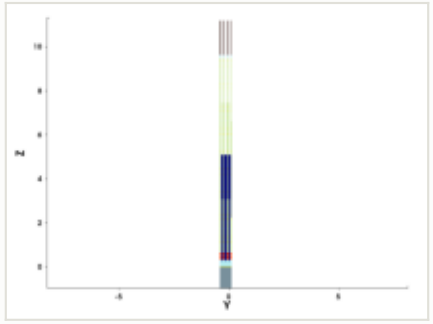

y cut at -0.150 µm

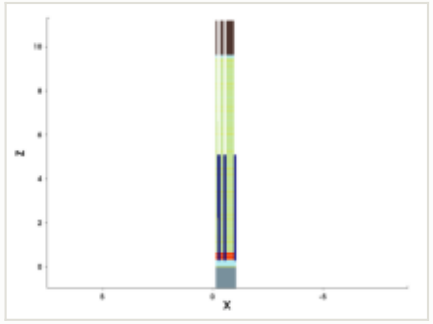

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

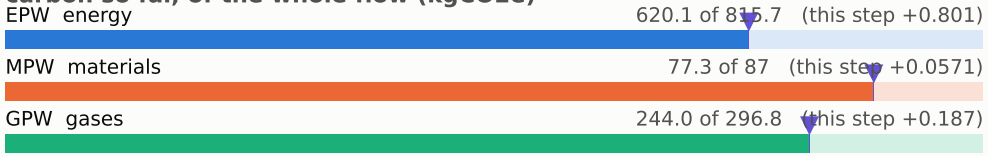

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

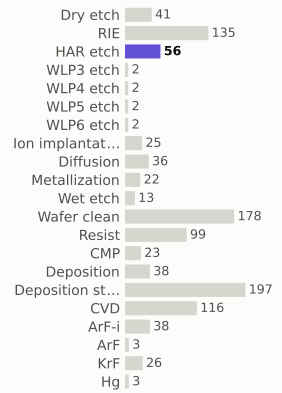

materials deposited (g)

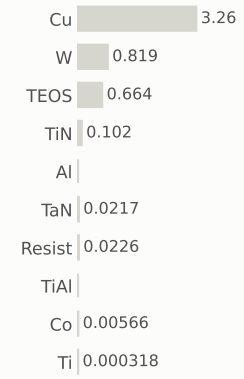

gases emitted (g)

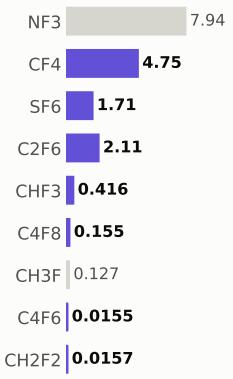

Step #19661.3265: HAR_etch

etch_noop · HAR_etch

1.04	942.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

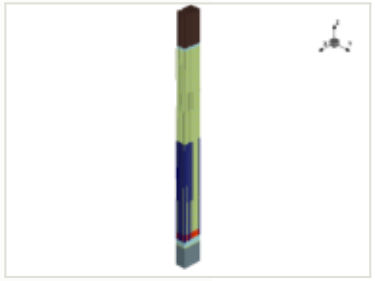

x cut at -0.570 µm

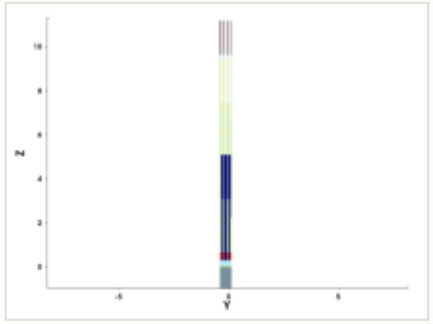

y cut at -0.150 µm

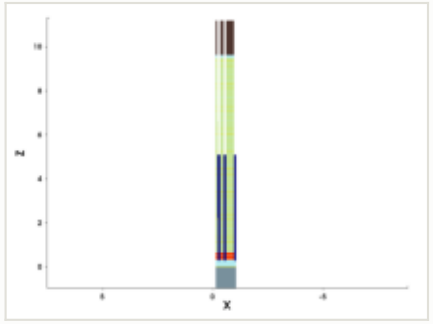

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

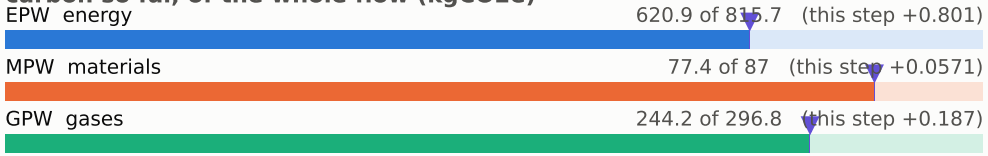

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

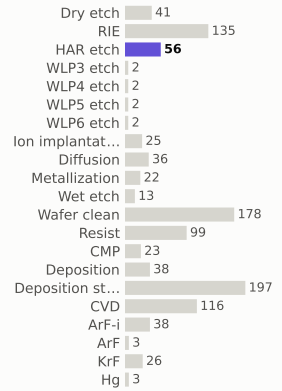

materials deposited (g)

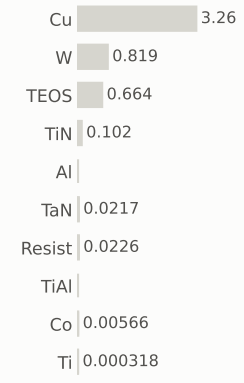

gases emitted (g)

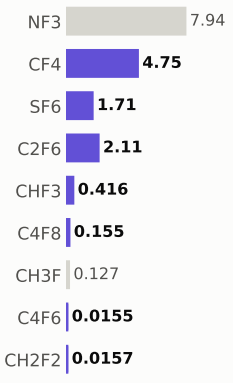

Step #19661.4286: HAR_etch

etch_noop · HAR_etch

1.04	943.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

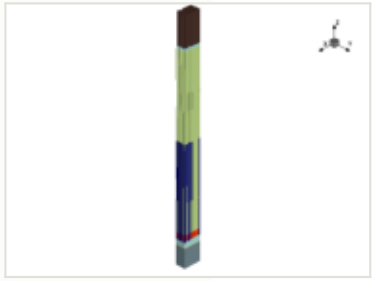

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

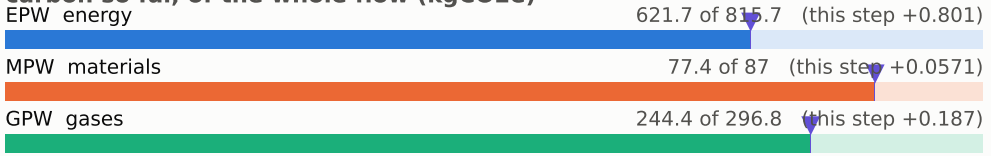

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

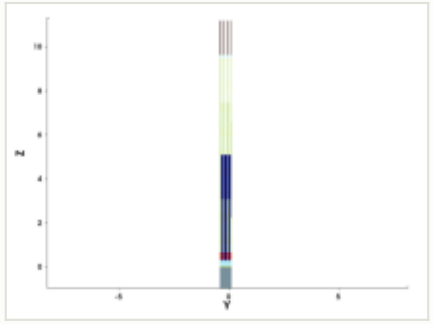

y cut at -0.150 µm

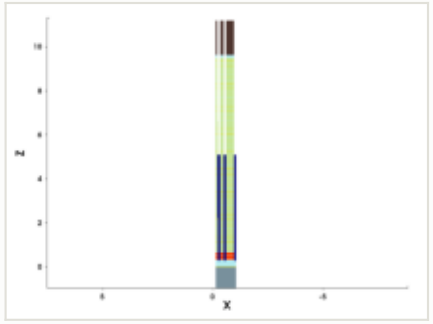

mask for this step

no mask for this step

steps by process area

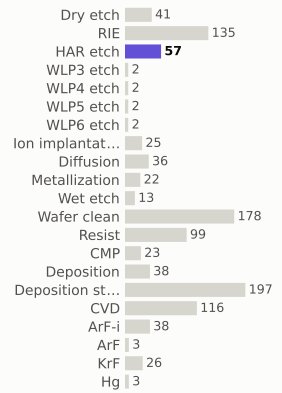

materials deposited (g)

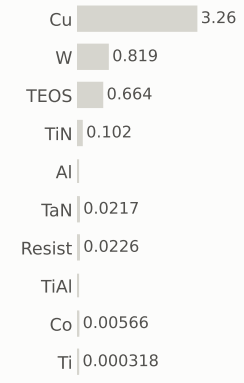

gases emitted (g)

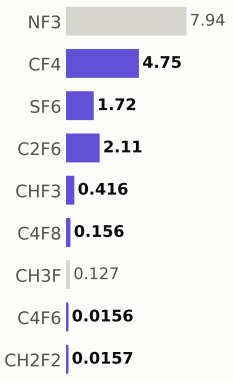

Step #19661.5306: HAR_etch

etch_noop · HAR_etch

1.04	944.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

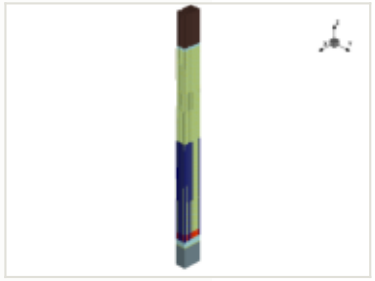

x cut at -0.570 µm

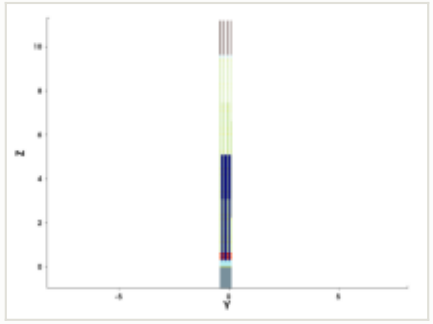

y cut at -0.150 µm

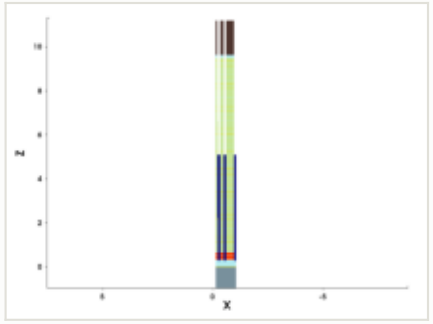

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

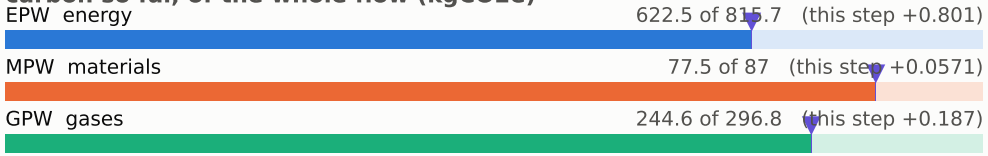

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

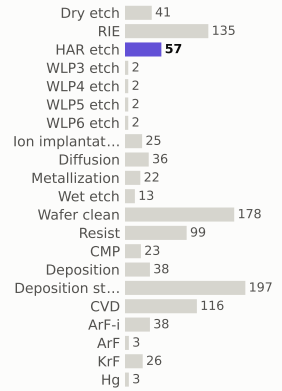

materials deposited (g)

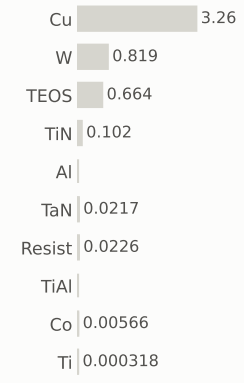

gases emitted (g)

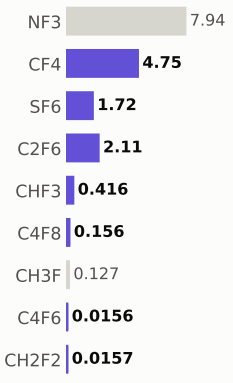

Step #19661.632700000002: HAR_etch

etch_noop · HAR_etch

1.04	945.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

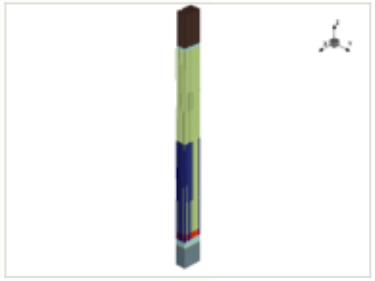

x cut at -0.570 µm

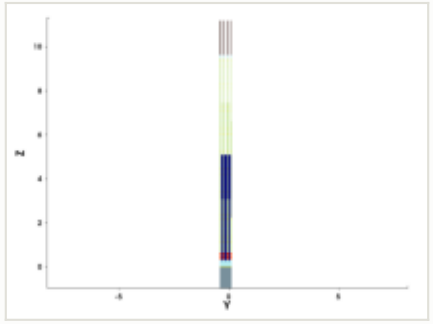

y cut at -0.150 µm

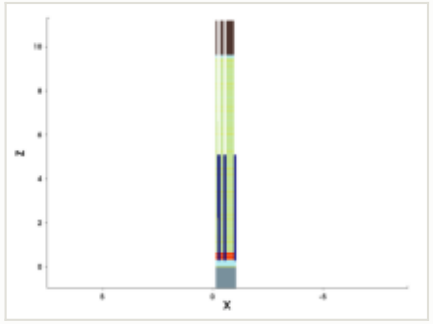

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

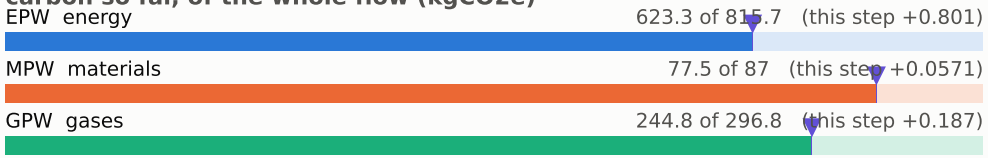

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

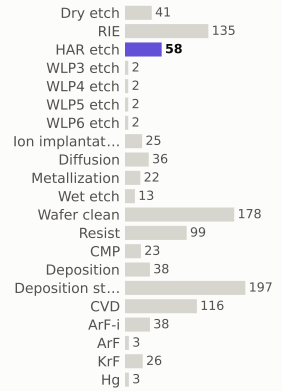

materials deposited (g)

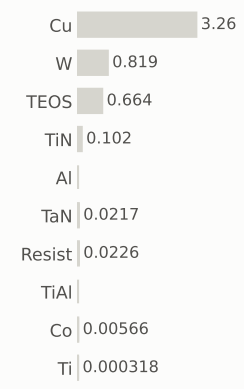

gases emitted (g)



Step #19661.7347: HAR_etch

etch_noop · HAR_etch

1.04	946.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

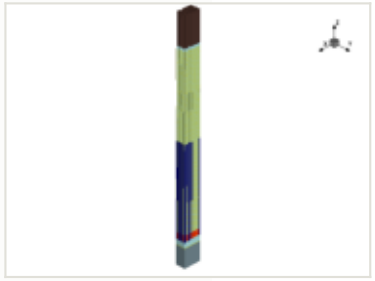

x cut at -0.570 µm

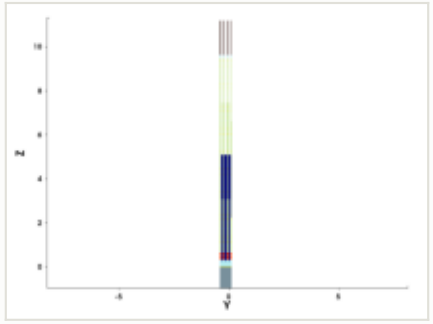

y cut at -0.150 µm

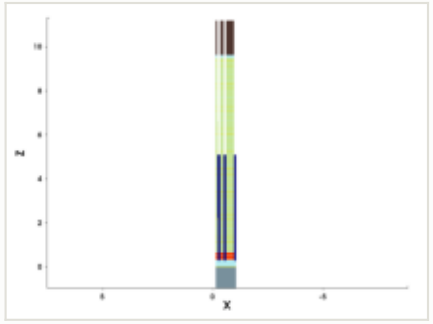

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

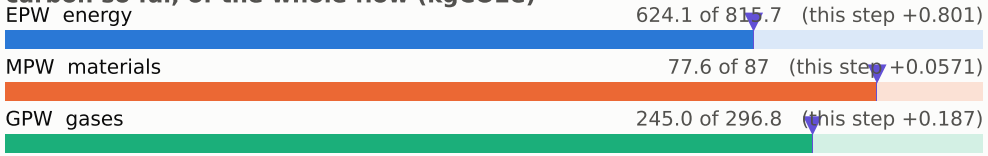

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

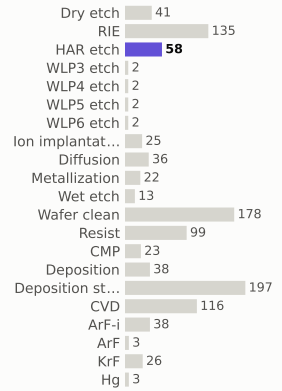

materials deposited (g)

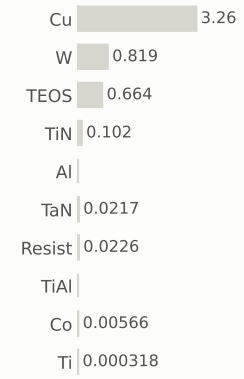

gases emitted (g)

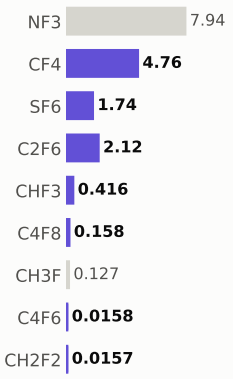

Step #19661.8367: HAR_etch

etch_noop · HAR_etch

1.04	947.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

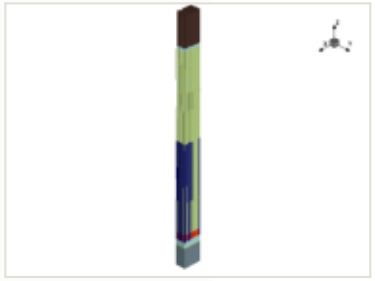

x cut at -0.570 µm

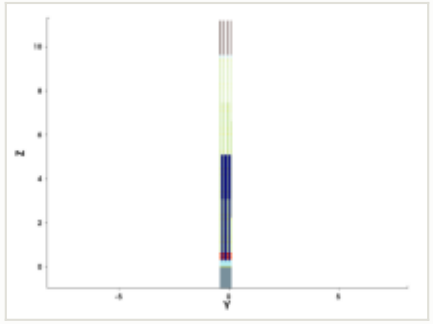

y cut at -0.150 µm

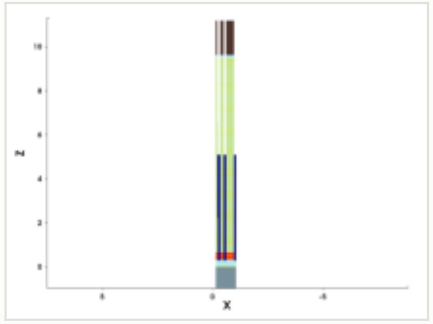

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

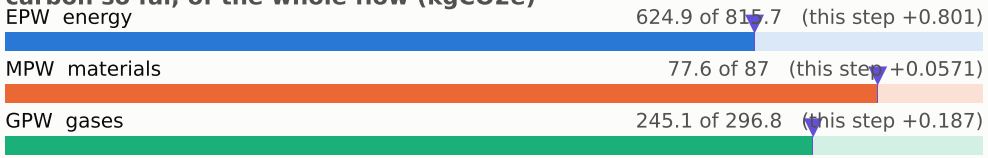

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

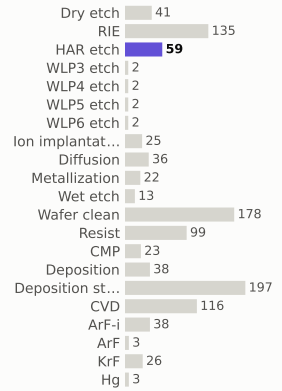

materials deposited (g)

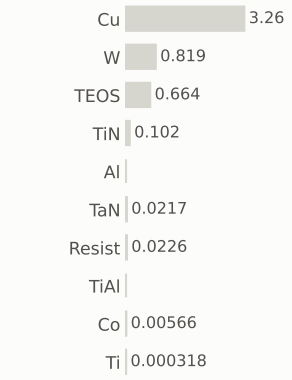

gases emitted (g)

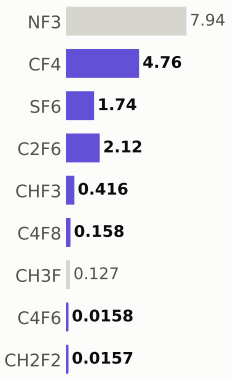

Step #19661.9388: HAR_etch

etch_noop · HAR_etch

1.04	948.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

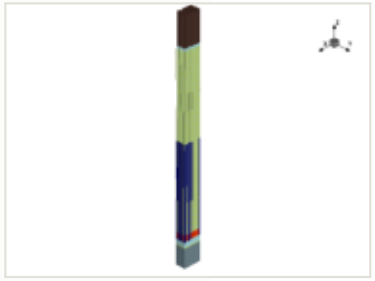

x cut at -0.570 µm

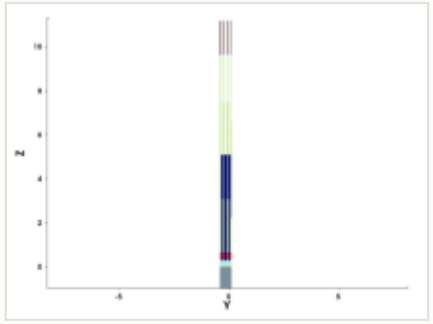

y cut at -0.150 µm

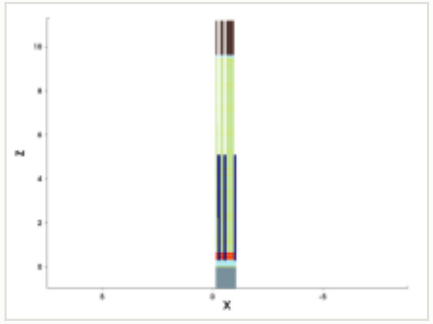

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

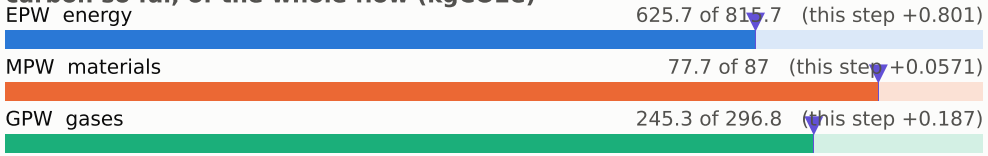

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

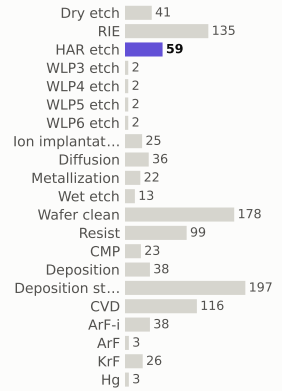

materials deposited (g)

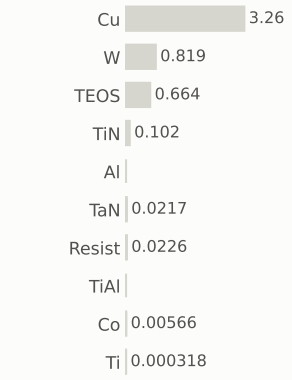

gases emitted (g)

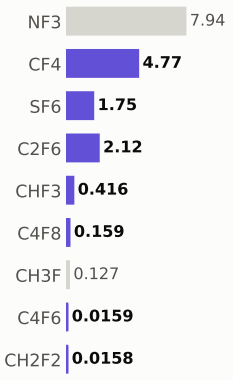

Step #19662.040800000002: HAR_etch

etch_noop · HAR_etch

1.04	949.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

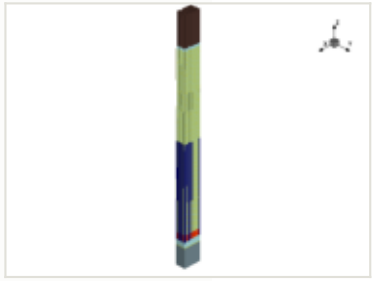

x cut at -0.570 µm

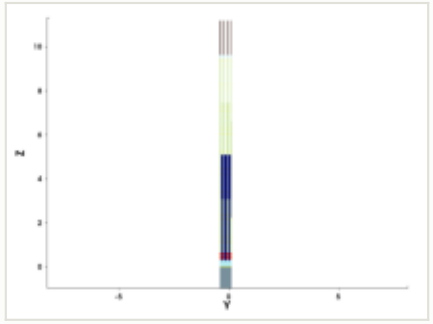

y cut at -0.150 µm

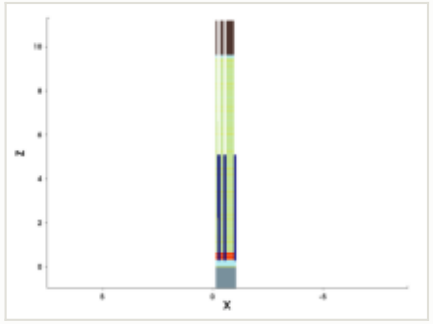

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

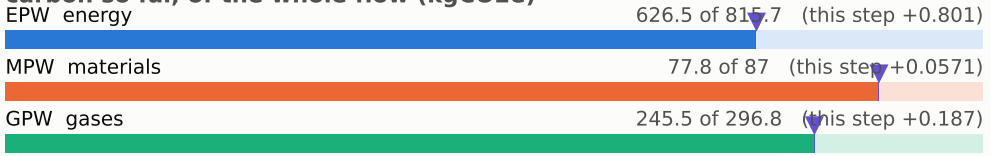

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

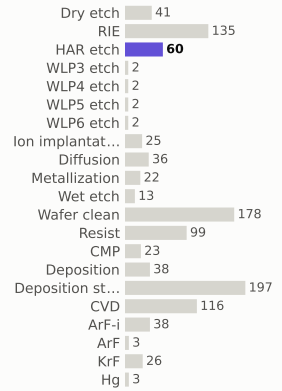

materials deposited (g)

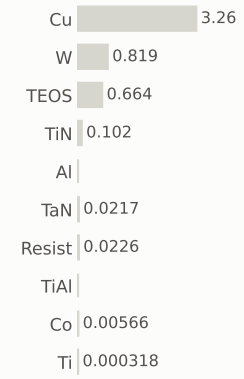

gases emitted (g)

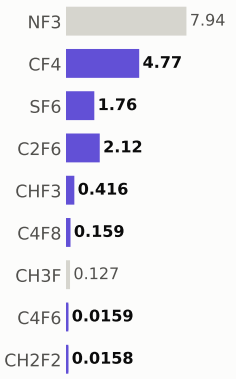

Step #19662.1429: HAR_etch

etch_noop · HAR_etch

1.04	950.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

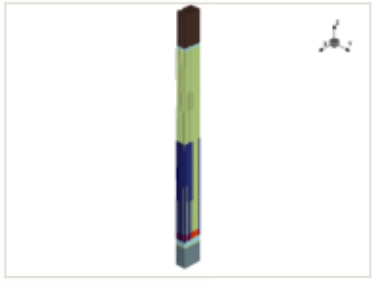

x cut at -0.570 µm

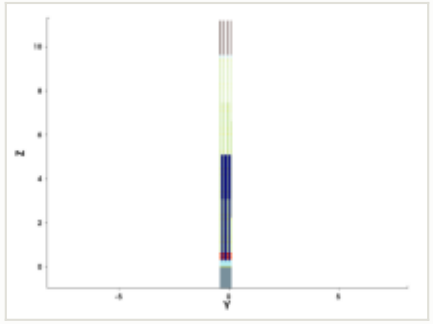

y cut at -0.150 µm

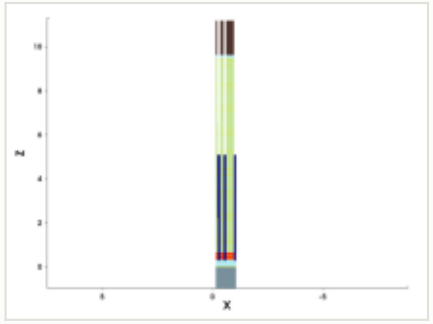

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

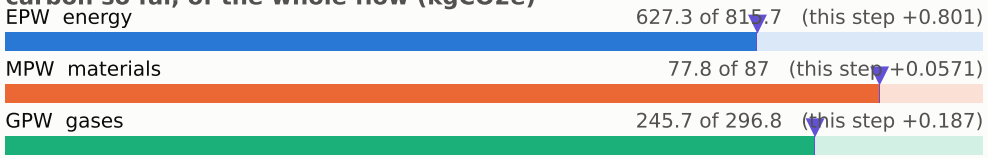

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

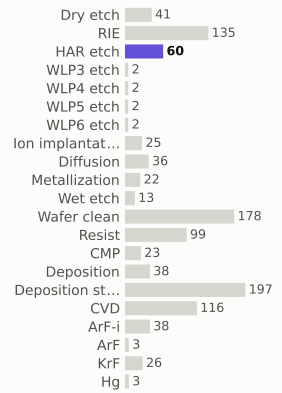

materials deposited (g)

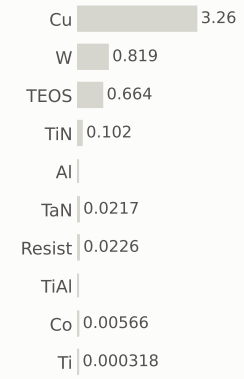

gases emitted (g)

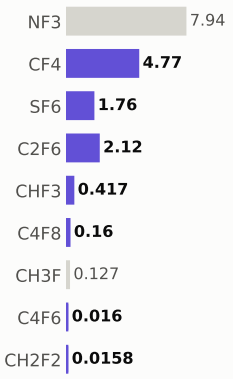

Step #19662.244899999998: HAR_etch

etch_noop · HAR_etch

1.04	951.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

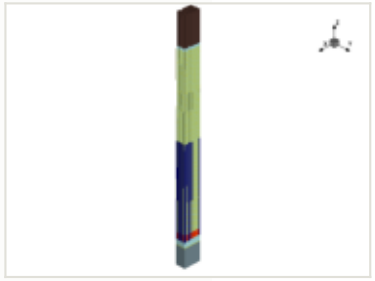

x cut at -0.570 µm

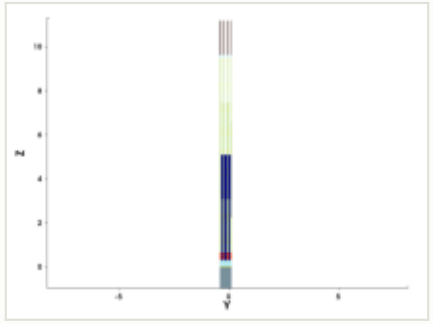

y cut at -0.150 µm

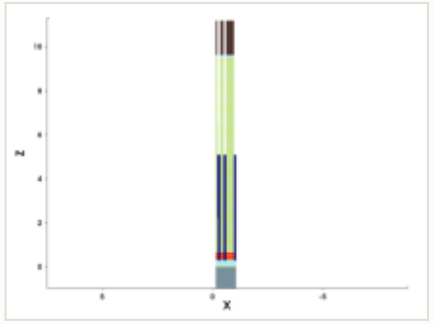

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

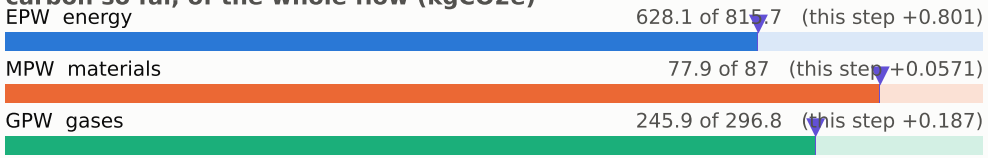

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

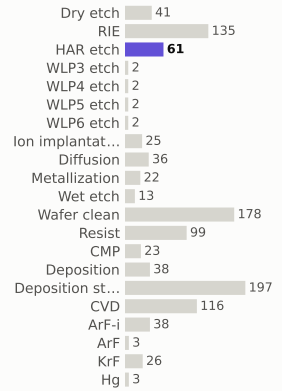

materials deposited (g)

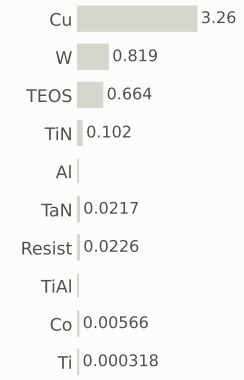

gases emitted (g)

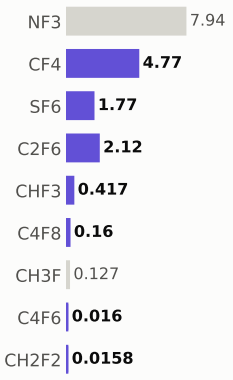

Step #19662.3469: HAR_etch

etch_noop · HAR_etch

1.04	952.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

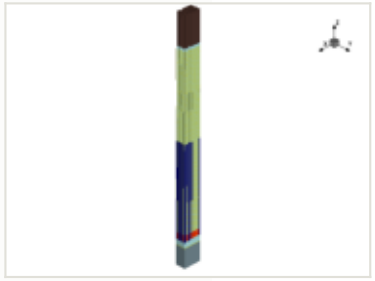

x cut at -0.570 µm

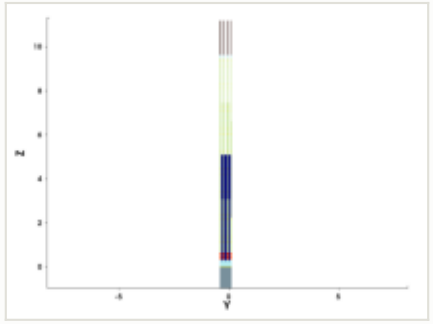

y cut at -0.150 µm

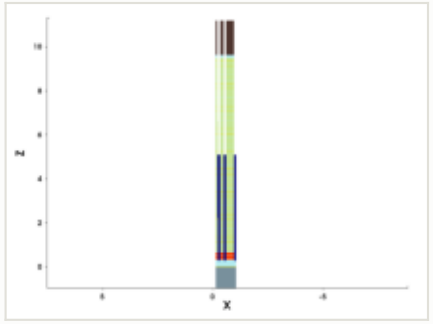

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

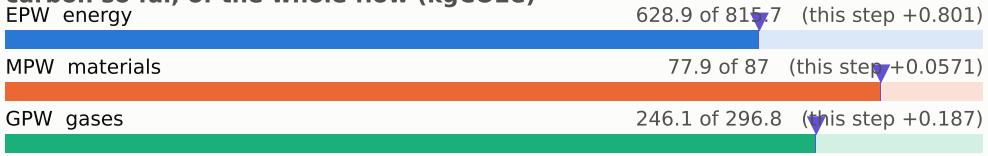

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

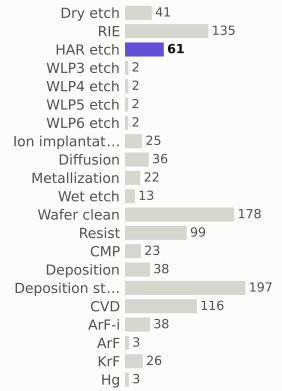

materials deposited (g)

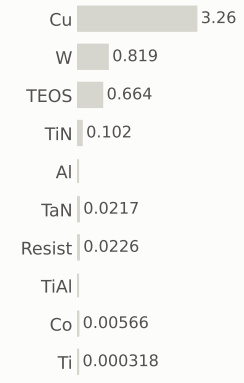

gases emitted (g)

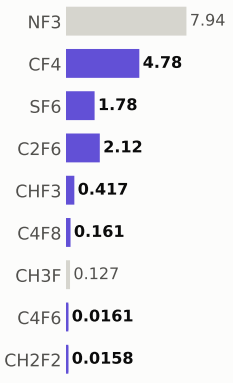

Step #19662.449: HAR_etch

etch_noop · HAR_etch

1.04	954.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

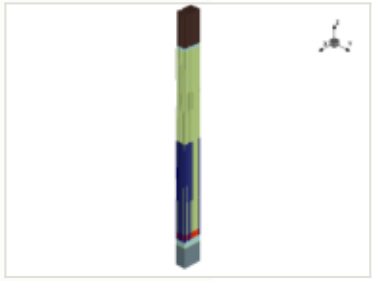

x cut at -0.570 µm

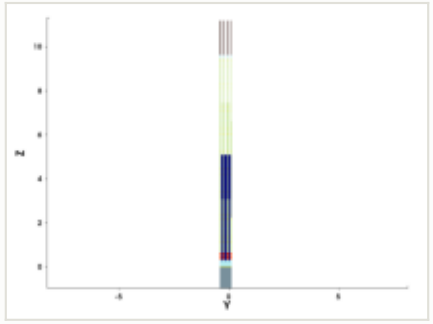

y cut at -0.150 µm

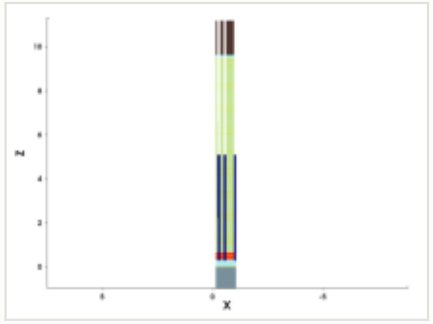

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

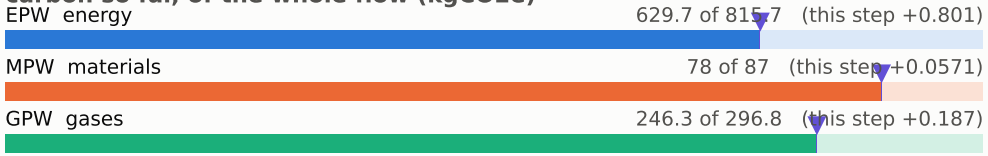

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

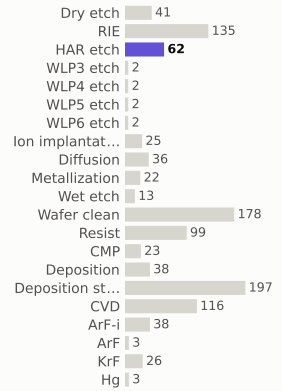

materials deposited (g)

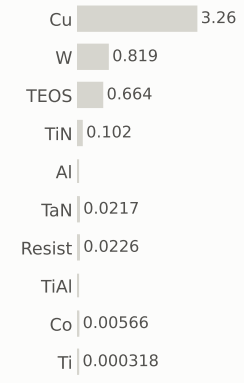

gases emitted (g)

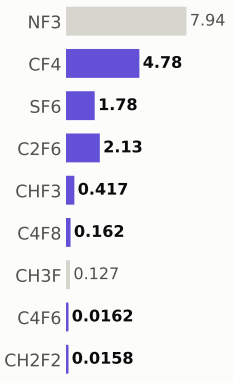

Step #19662.551: HAR_etch

etch_noop · HAR_etch

1.04	955.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

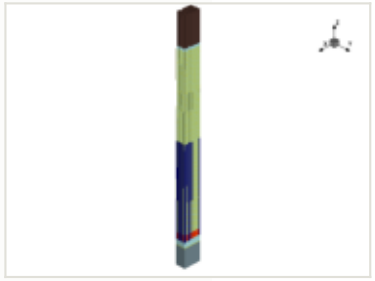

x cut at -0.570 µm

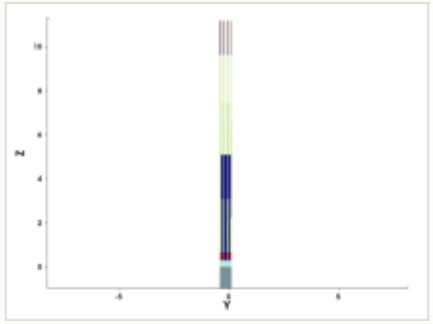

y cut at -0.150 µm

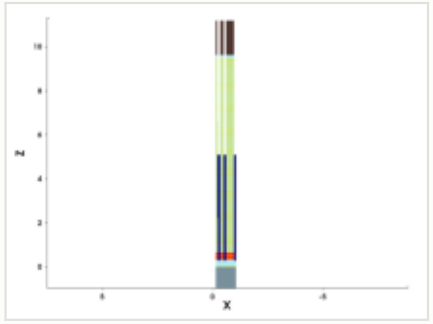

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

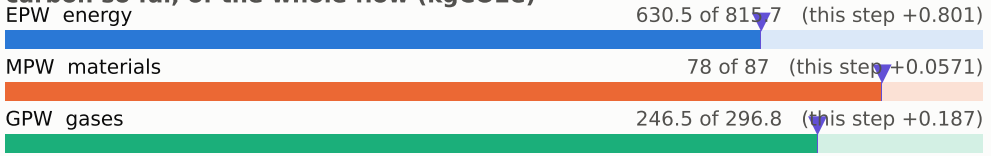

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

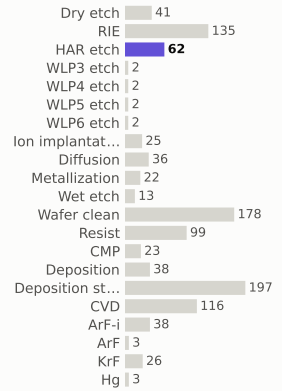

materials deposited (g)

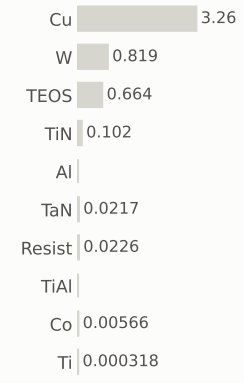

gases emitted (g)

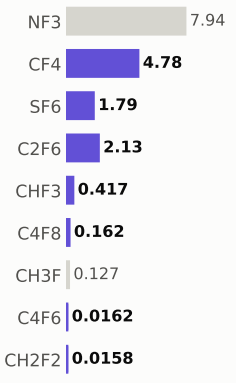

Step #19662.6531: HAR_etch

etch_noop · HAR_etch

1.04	956.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

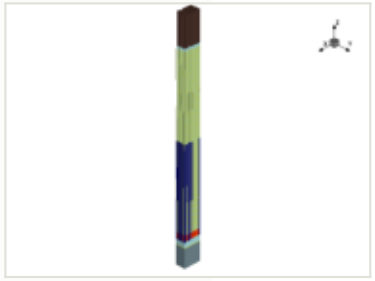

x cut at -0.570 µm

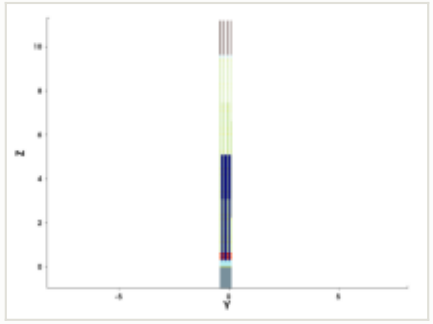

y cut at -0.150 µm

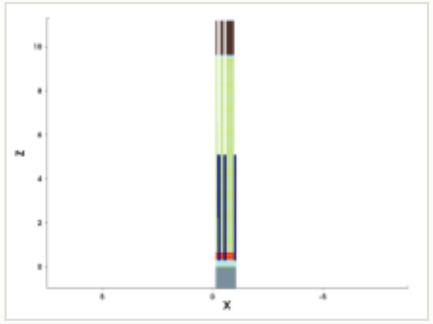

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

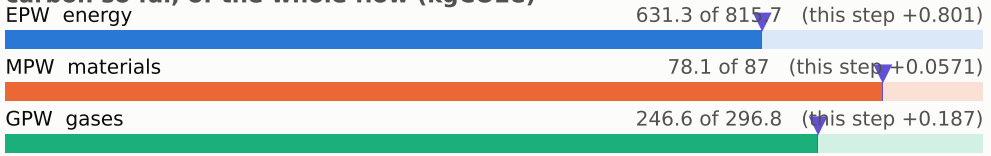

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

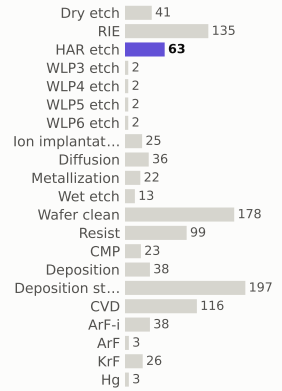

materials deposited (g)

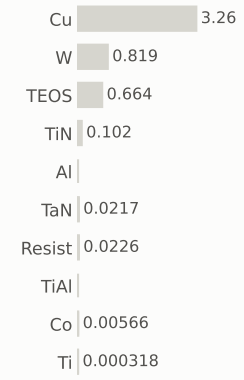

gases emitted (g)

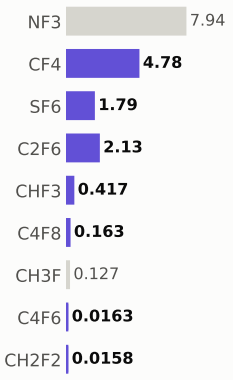

Step #19662.755100000002: HAR_etch

etch_noop · HAR_etch

1.04	957.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

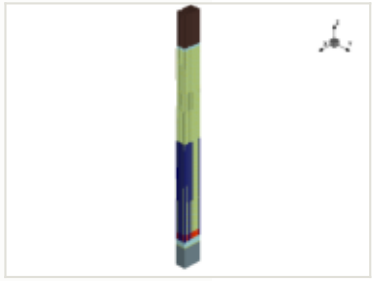

x cut at -0.570 µm

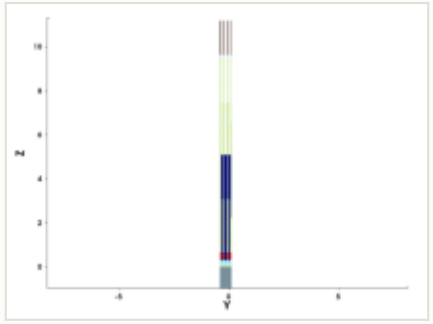

y cut at -0.150 µm

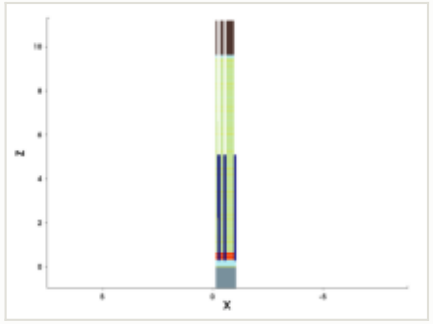

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

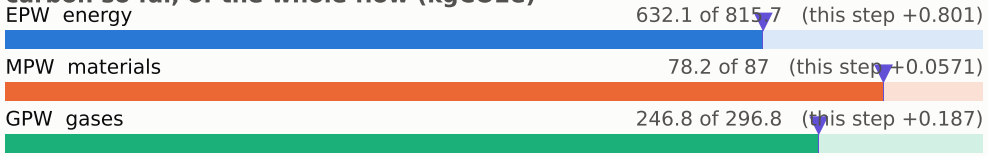

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

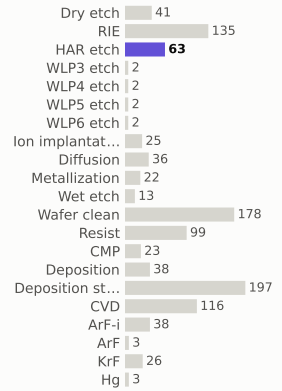

materials deposited (g)

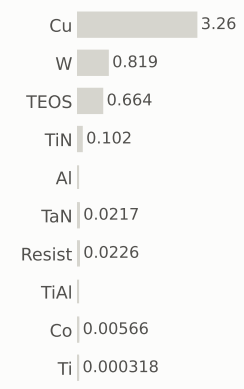

gases emitted (g)



Step #19662.8571: HAR_etch

etch_noop · HAR_etch

1.04	958.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

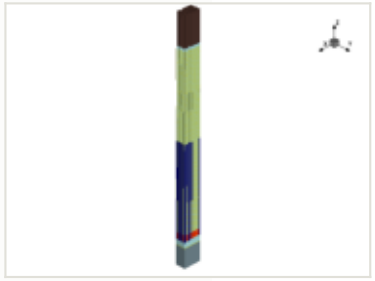

x cut at -0.570 µm

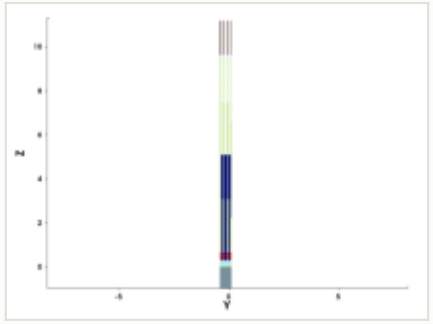

y cut at -0.150 µm

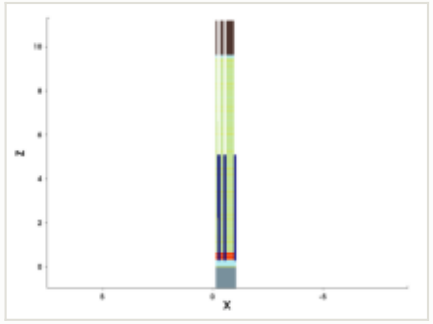

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

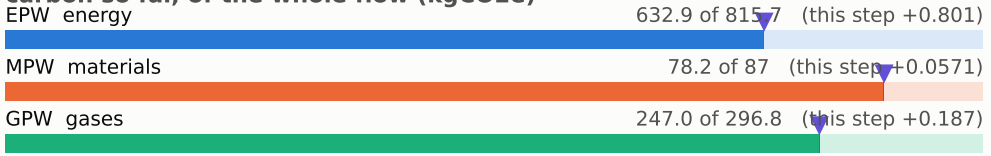

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

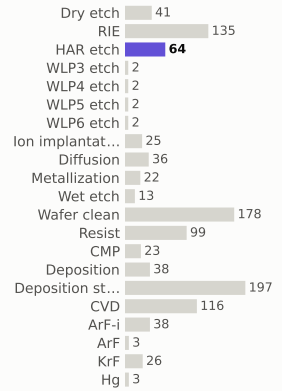

materials deposited (g)

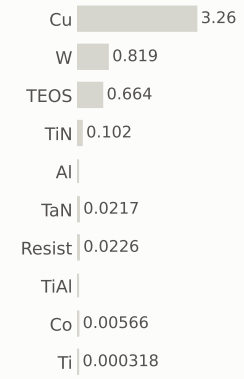

gases emitted (g)

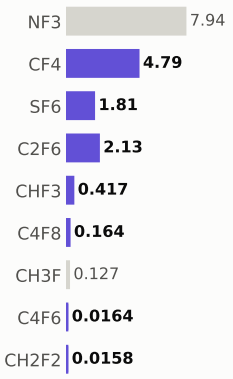

Step #19662.959199999998: HAR_etch

etch_noop · HAR_etch

1.04	959.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

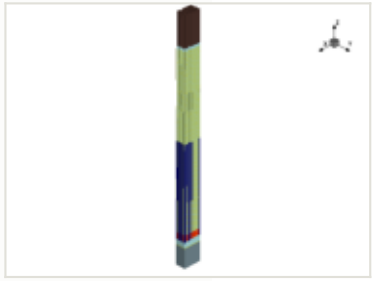

x cut at -0.570 µm

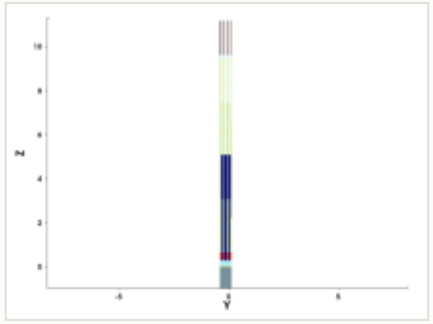

y cut at -0.150 µm

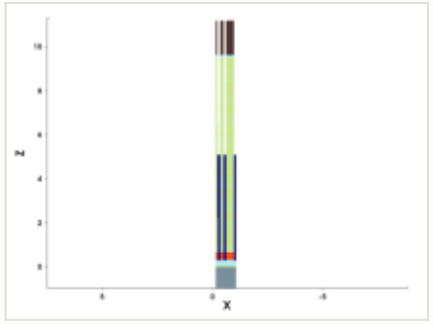

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

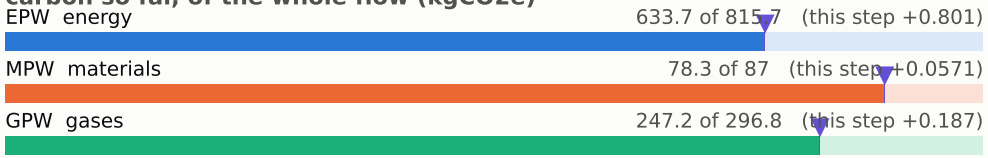

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

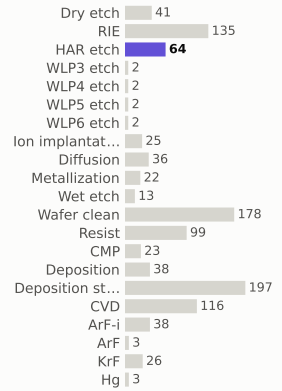

materials deposited (g)

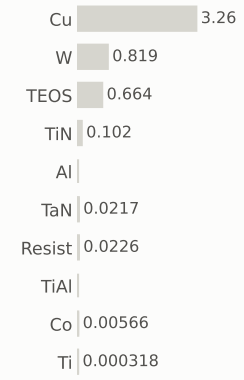

gases emitted (g)

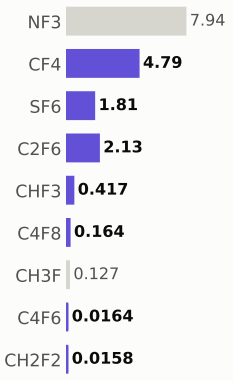

Step #19663.0612: HAR_etch

etch_noop · HAR_etch

1.04	960.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

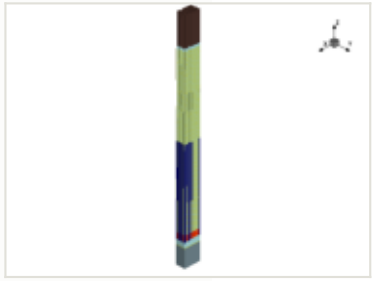

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

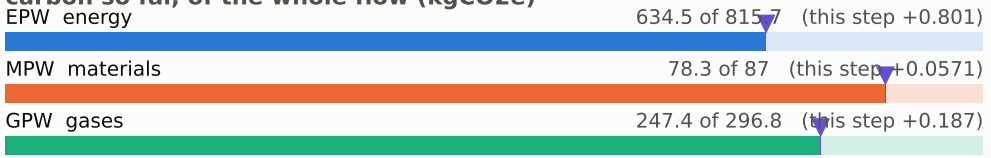

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

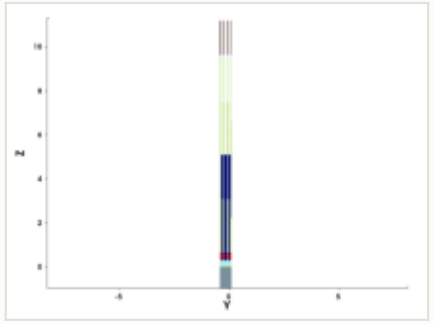

y cut at -0.150 µm

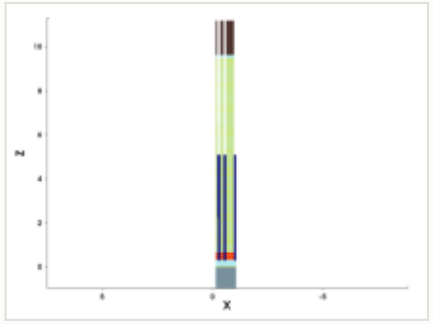

mask for this step

no mask for this step

steps by process area

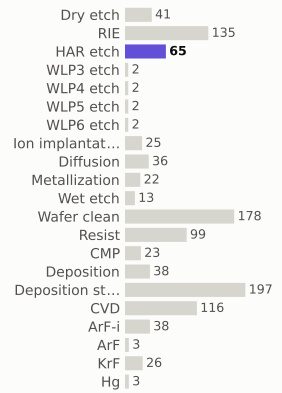

materials deposited (g)

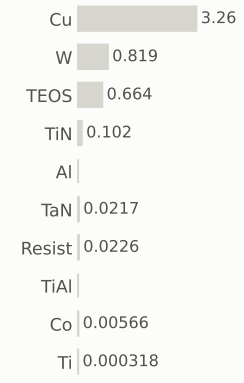

gases emitted (g)

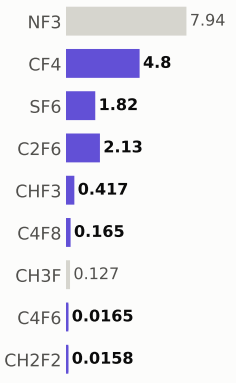

Step #19663.1633: HAR_etch

etch_noop · HAR_etch

1.04	961.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

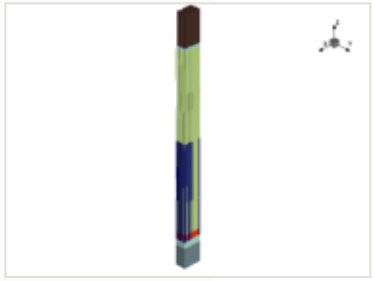

x cut at -0.570 µm

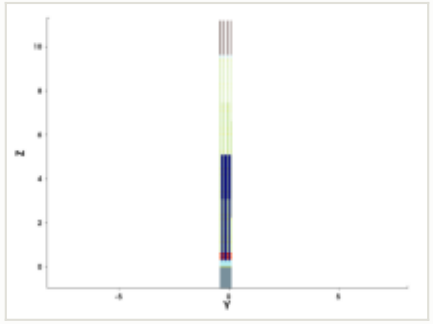

y cut at -0.150 µm

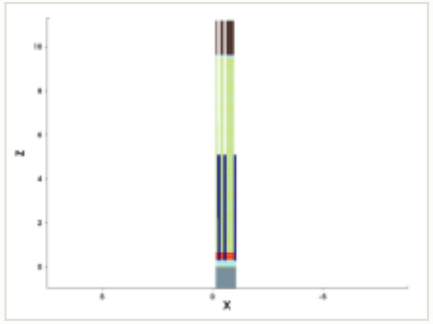

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

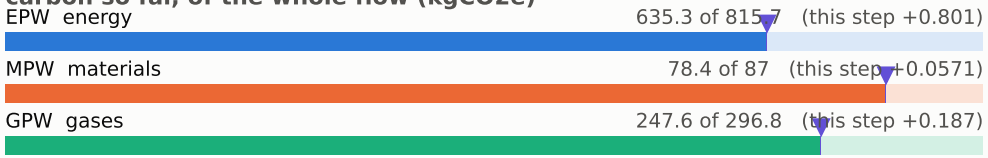

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

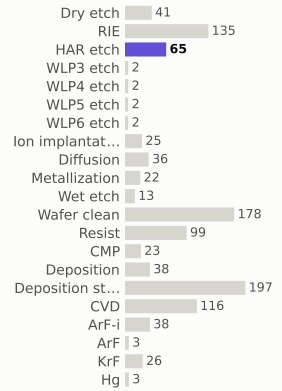

materials deposited (g)

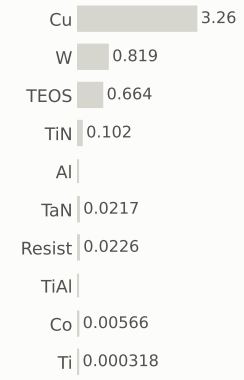

gases emitted (g)

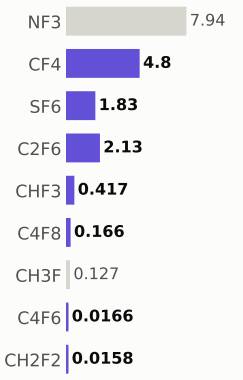

Step #19663.2653: HAR_etch

etch_noop · HAR_etch

1.04	962.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

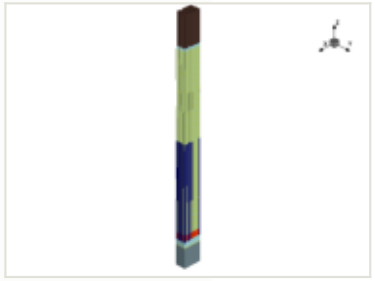

x cut at -0.570 µm

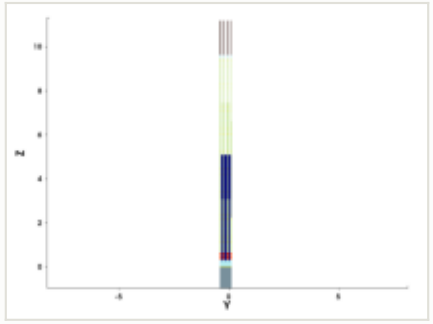

y cut at -0.150 µm

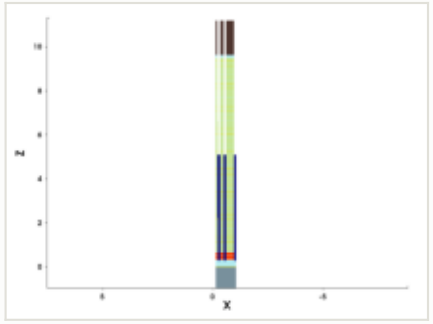

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

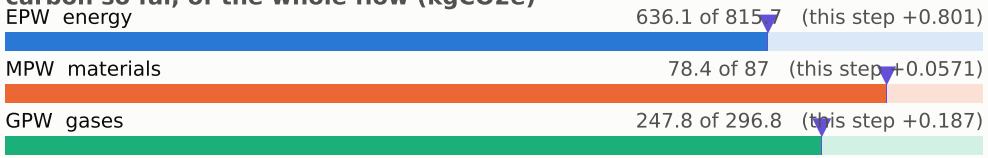

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

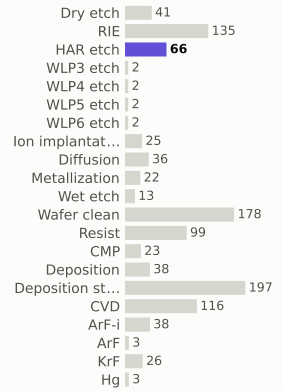

materials deposited (g)

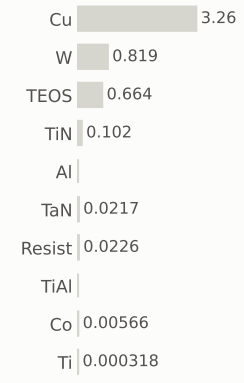

gases emitted (g)

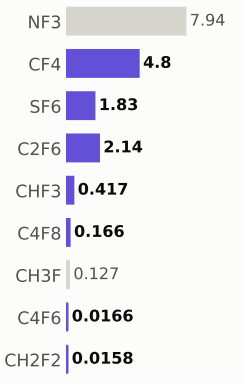

Step #19663.367299999998: HAR_etch

etch_noop · HAR_etch

1.04	963.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

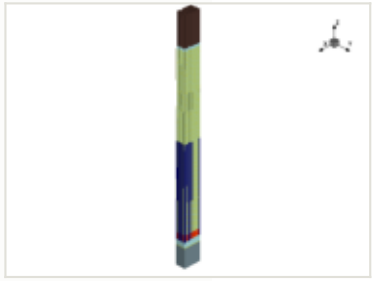

x cut at -0.570 µm

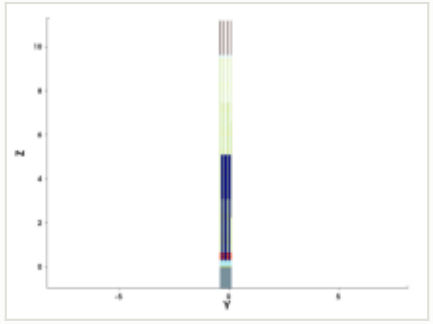

y cut at -0.150 µm

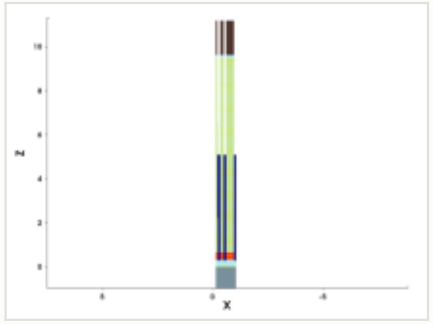

mask for this step

no mask for this step

this step

process area	HAR_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

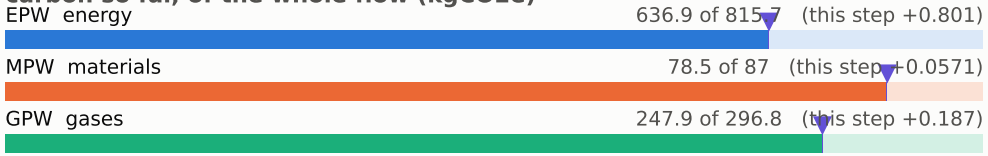

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

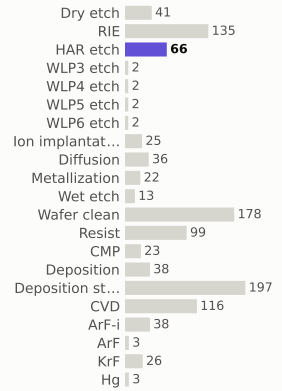

materials deposited (g)

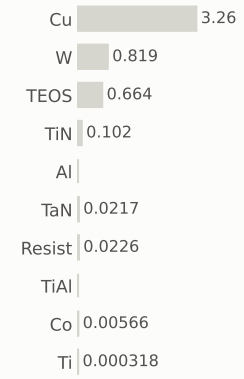

gases emitted (g)

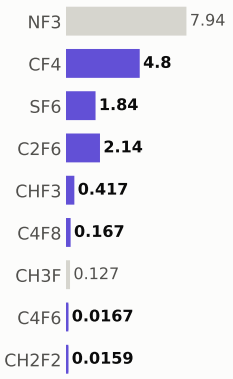

Step #19663.4694: HAR_etch

etch_noop · HAR_etch

1.04	964.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

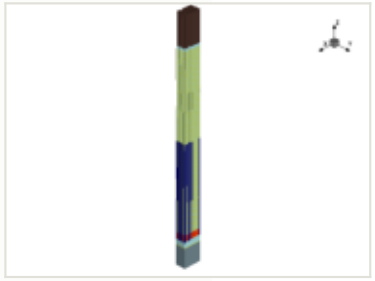

x cut at -0.570 µm

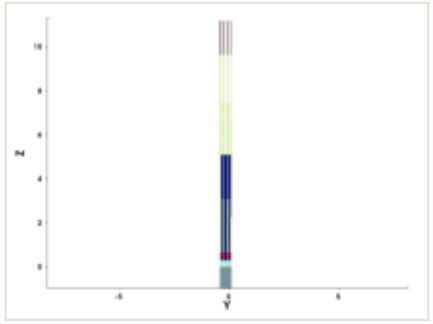

y cut at -0.150 µm

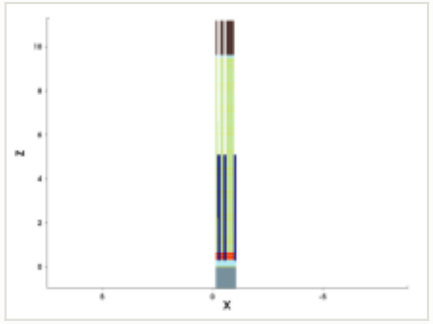

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

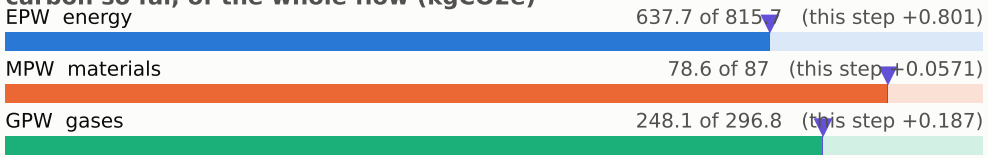

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

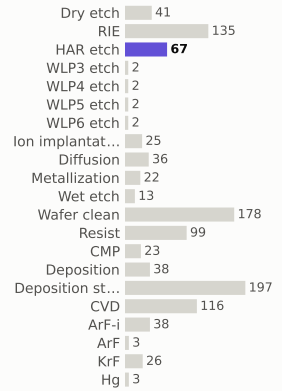

materials deposited (g)

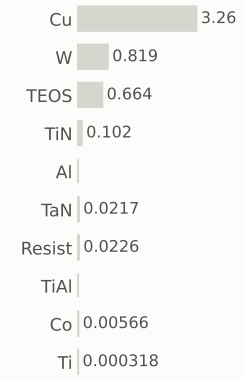

gases emitted (g)

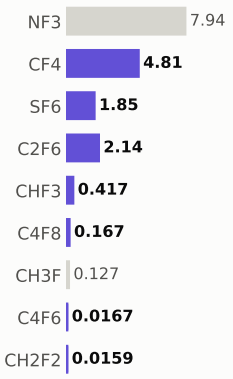

Step #19663.5714: HAR_etch

etch_noop · HAR_etch

1.04	965.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

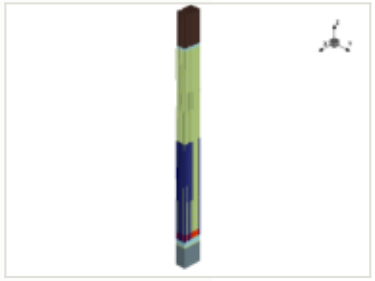

x cut at -0.570 µm

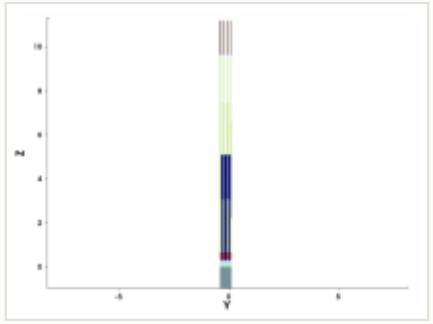

y cut at -0.150 µm

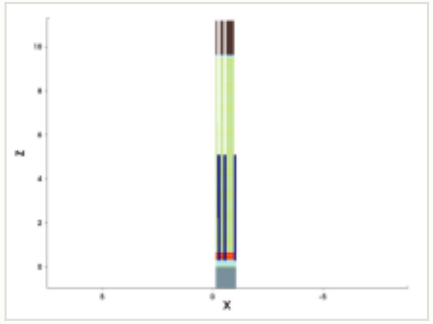

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

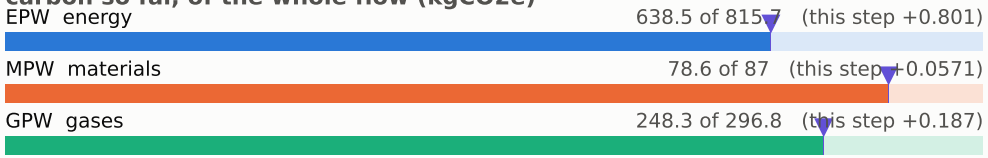

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

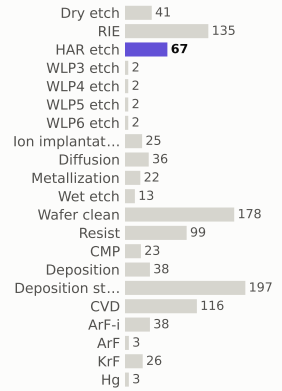

materials deposited (g)

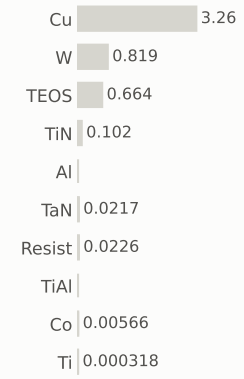

gases emitted (g)

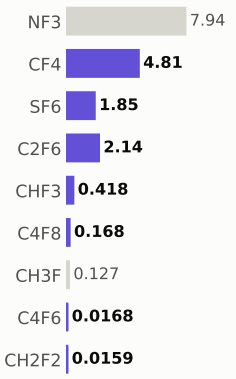

Step #19663.6735: HAR_etch

etch_noop · HAR_etch

1.04	966.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

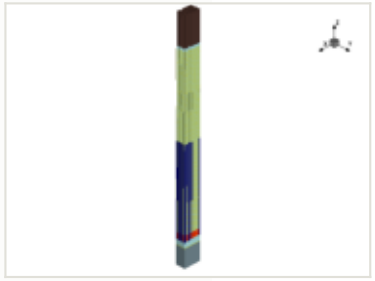

x cut at -0.570 µm

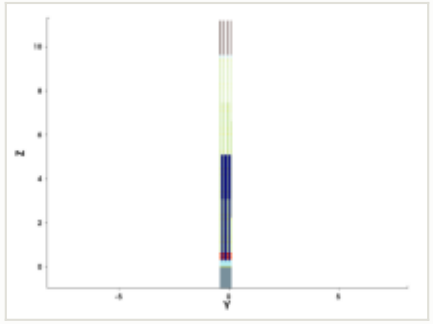

y cut at -0.150 µm

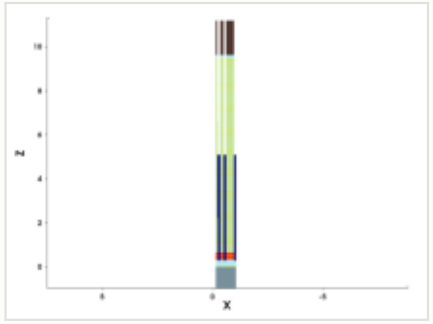

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

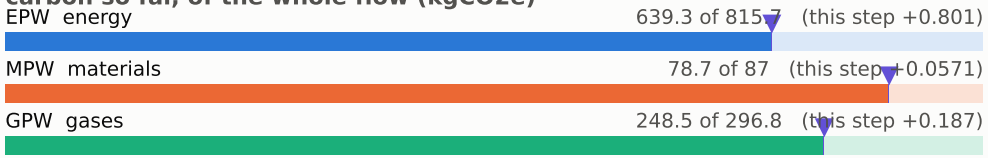

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

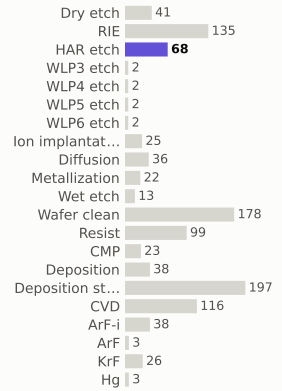

materials deposited (g)

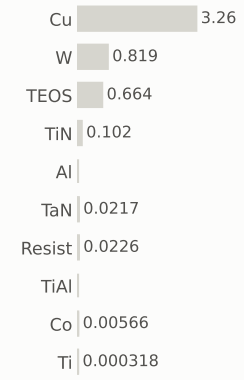

gases emitted (g)

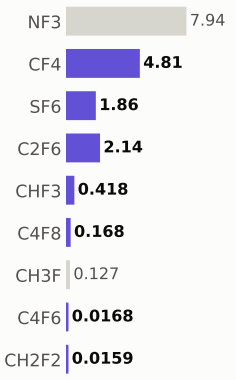

Step #19663.7755: HAR_etch

etch_noop · HAR_etch

1.04	967.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

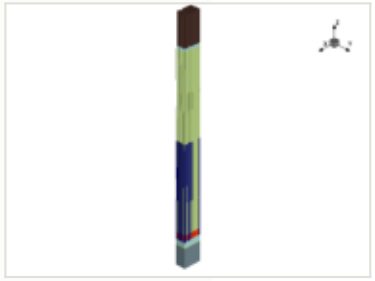

x cut at -0.570 µm

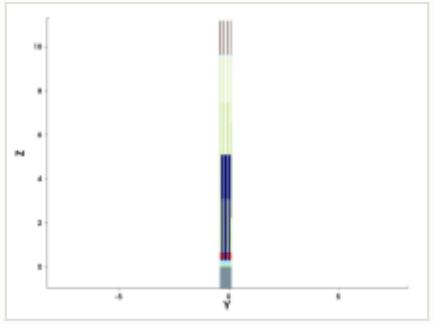

y cut at -0.150 µm

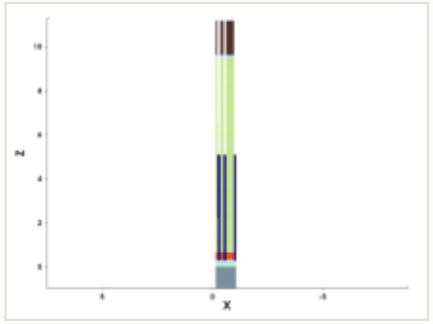

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

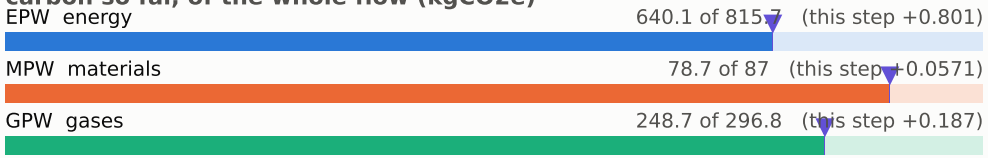

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

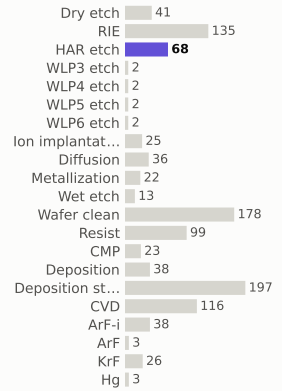

materials deposited (g)

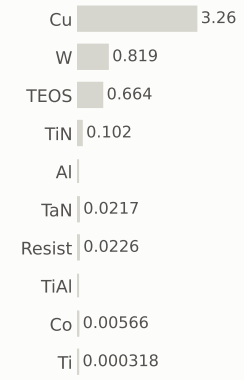

gases emitted (g)

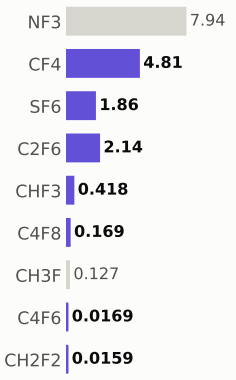

Step #19663.8776: HAR_etch

etch_noop · HAR_etch

1.04	968.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

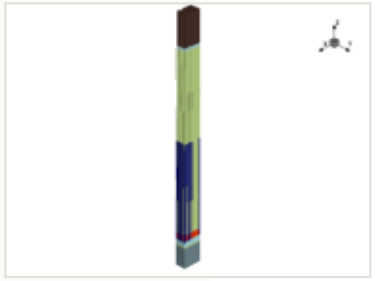

x cut at -0.570 µm

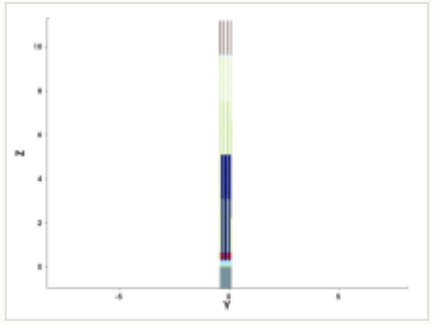

y cut at -0.150 µm

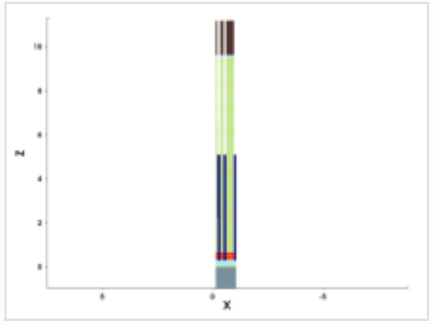

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

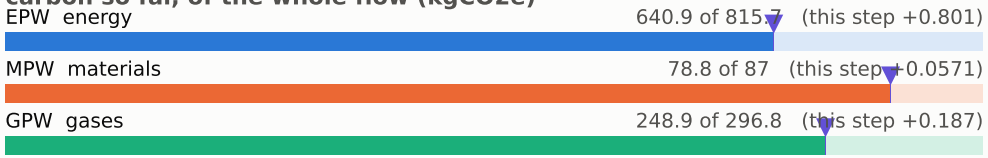

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

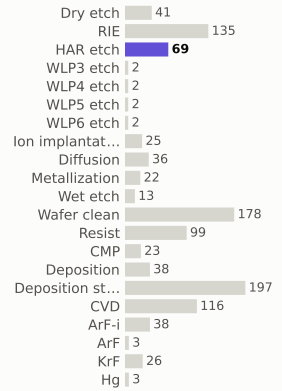

materials deposited (g)

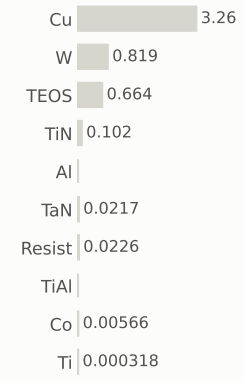

gases emitted (g)

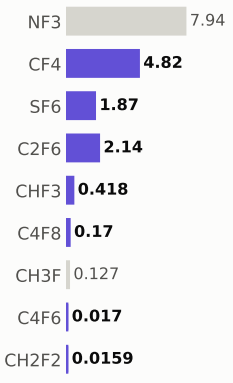

Step #19663.9796: HAR_etch

etch_noop · HAR_etch

1.04	969.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

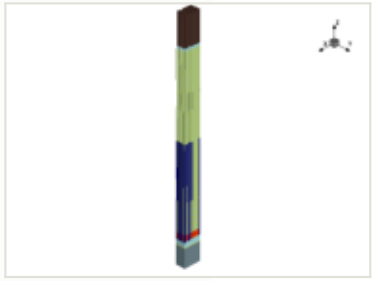

x cut at -0.570 µm

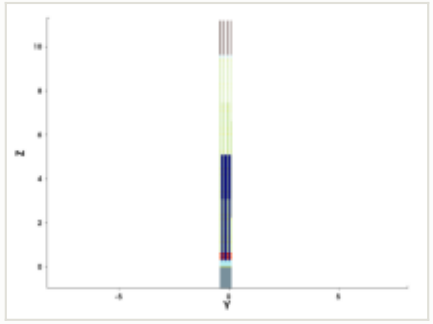

y cut at -0.150 µm

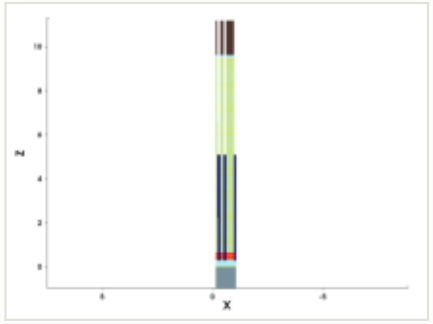

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

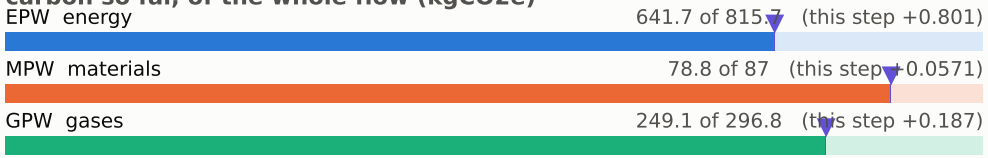

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

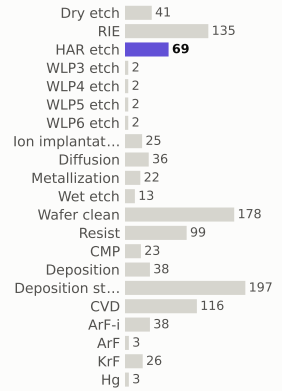

materials deposited (g)

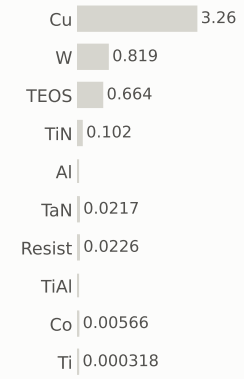

gases emitted (g)

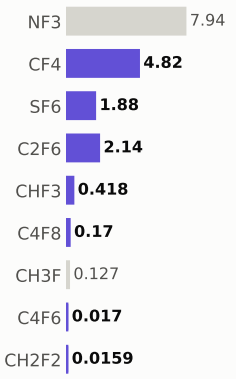

Step #19664.081599999998: HAR_etch

etch_noop · HAR_etch

1.04	970.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

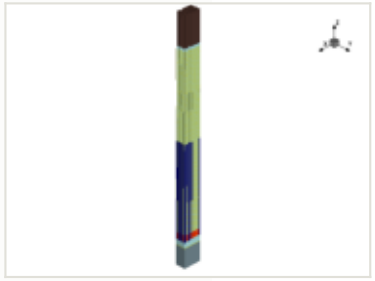

x cut at -0.570 µm

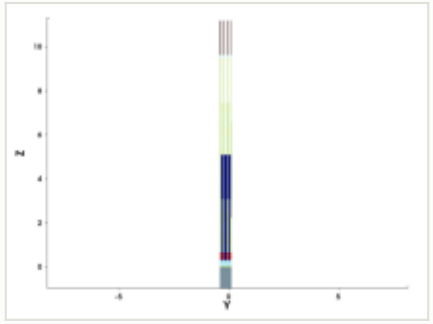

y cut at -0.150 µm

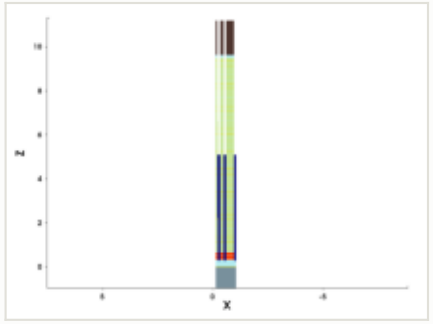

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

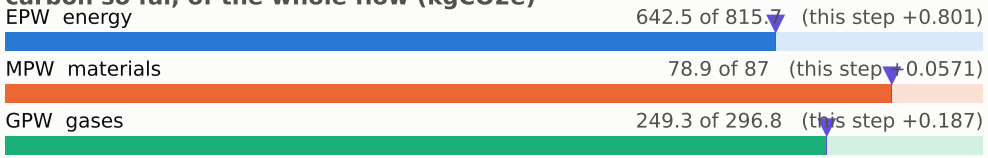

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

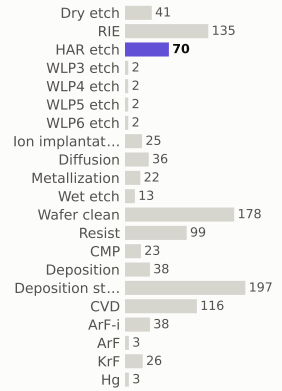

materials deposited (g)

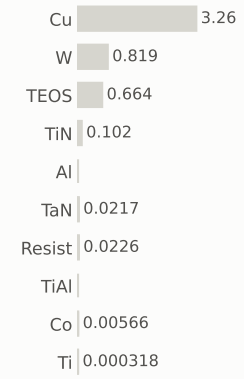

gases emitted (g)

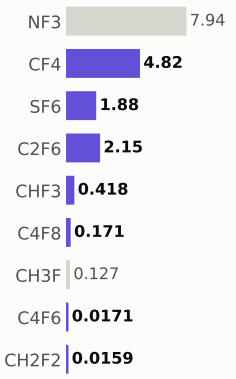

Step #19664.1837: HAR_etch

etch_noop · HAR_etch

1.04	971.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

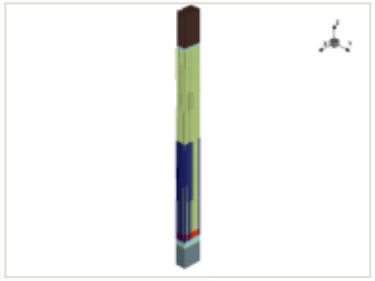

x cut at -0.570 µm

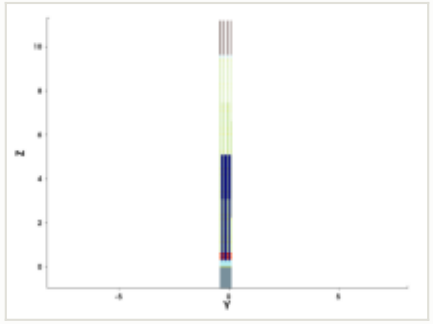

y cut at -0.150 µm

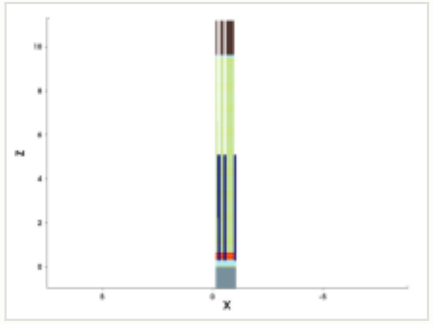

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

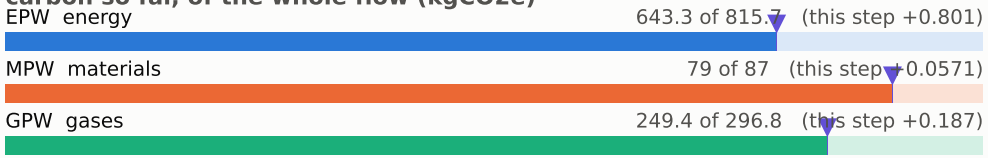

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

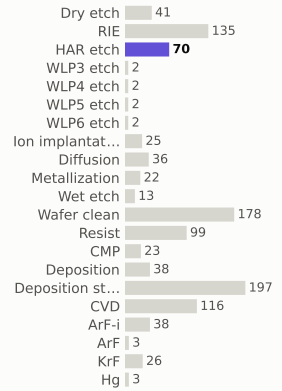

materials deposited (g)

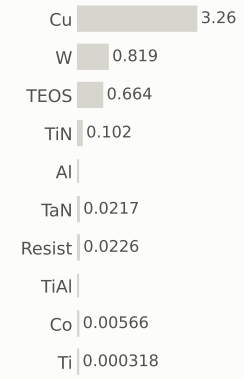

gases emitted (g)

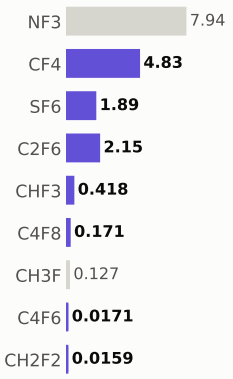

Step #19664.2857: HAR_etch

etch_noop · HAR_etch

1.04	972.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

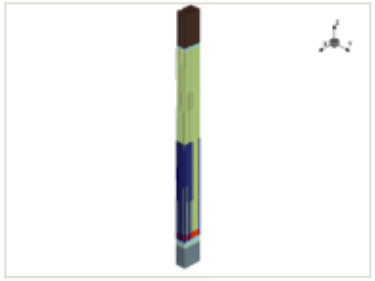

x cut at -0.570 µm

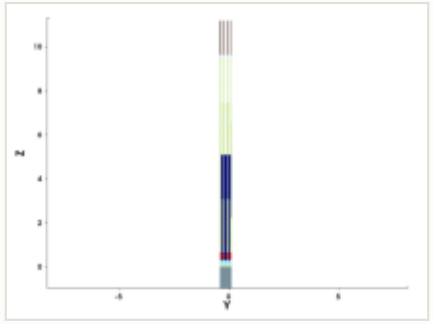

y cut at -0.150 µm

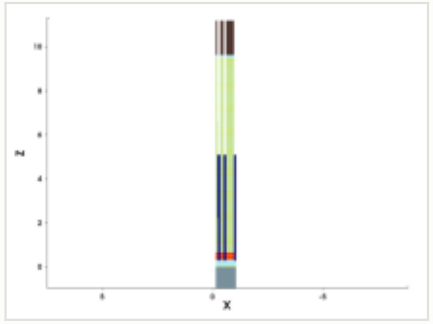

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

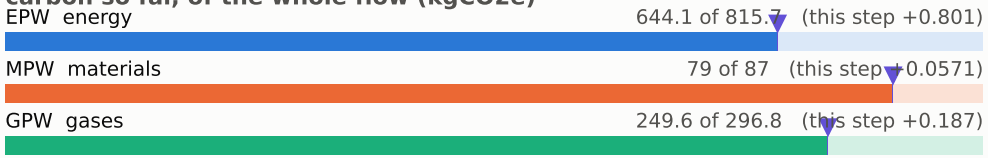

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

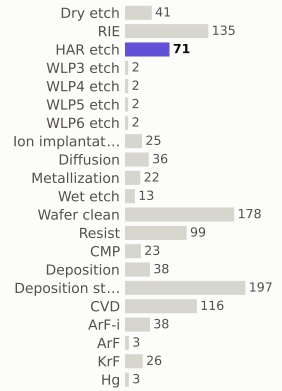

materials deposited (g)

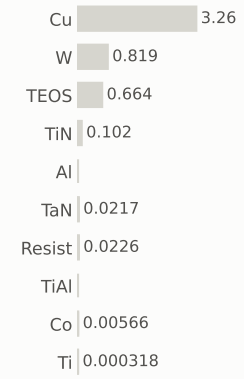

gases emitted (g)

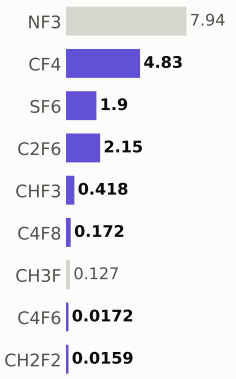

Step #19664.3878: HAR_etch

etch_noop · HAR_etch

1.04	973.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

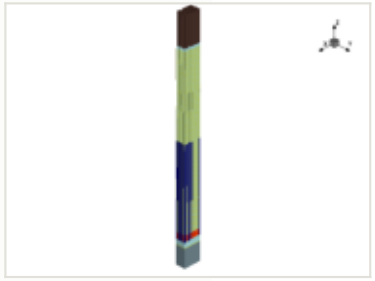

x cut at -0.570 µm

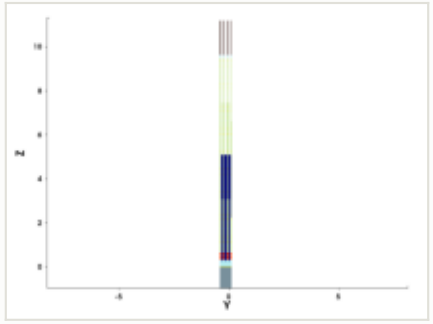

y cut at -0.150 µm

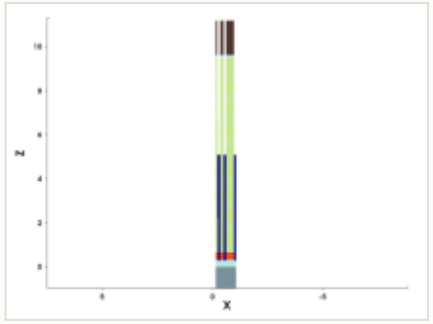

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

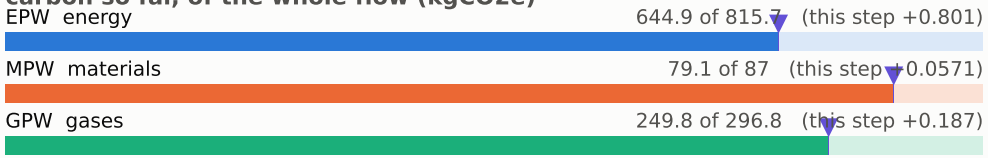

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

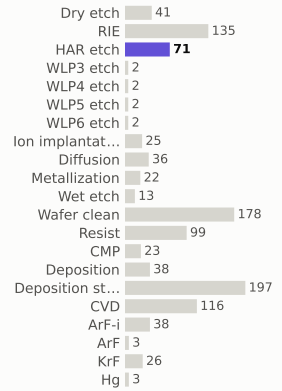

materials deposited (g)

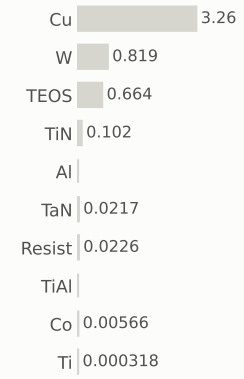

gases emitted (g)

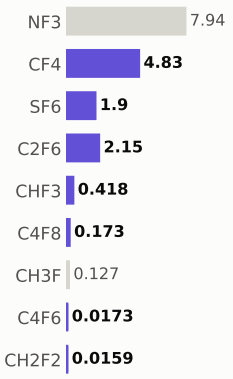

Step #19664.4898: HAR_etch

etch_noop · HAR_etch

1.04	974.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

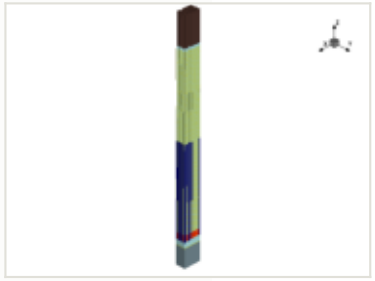

x cut at -0.570 µm

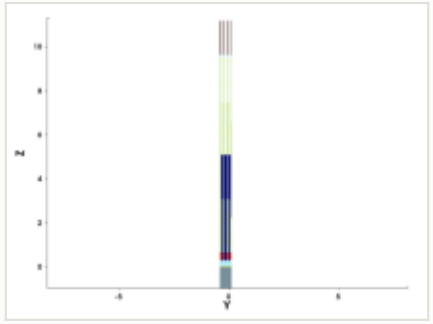

y cut at -0.150 µm

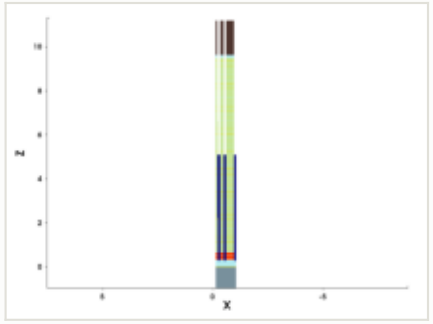

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

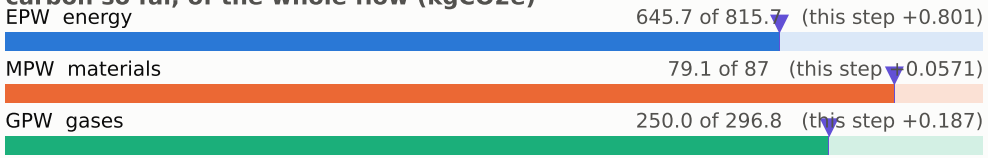

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

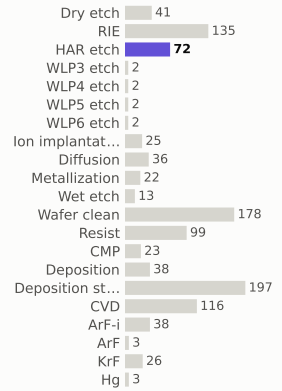

materials deposited (g)

gases emitted (g)

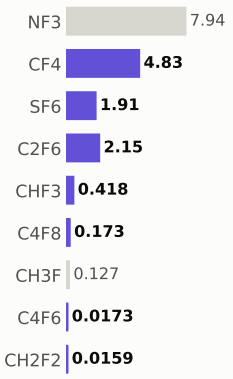

Step #19664.591800000002: HAR_etch

etch_noop · HAR_etch

1.04	975.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

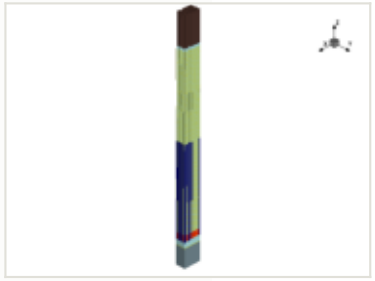

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

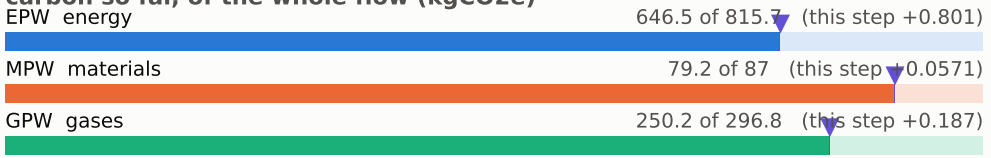

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

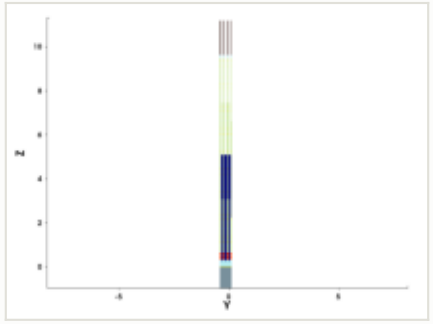

y cut at -0.150 µm

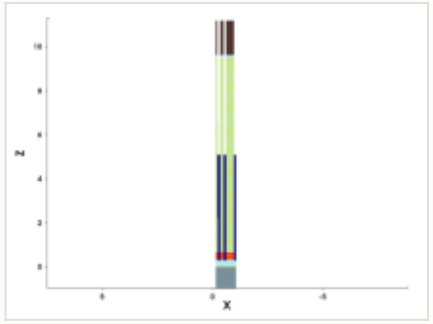

mask for this step

no mask for this step

steps by process area

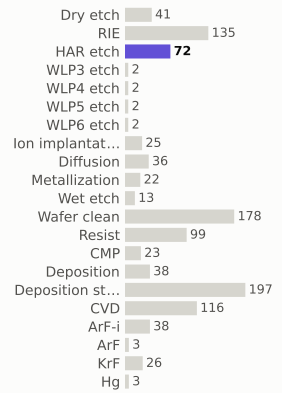

materials deposited (g)

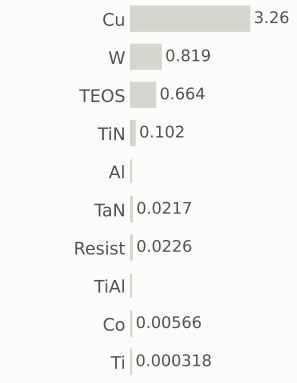

gases emitted (g)

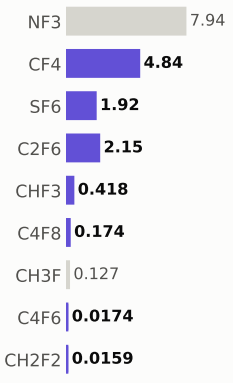

Step #19664.6939: HAR_etch

etch_noop · HAR_etch

1.04	977.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

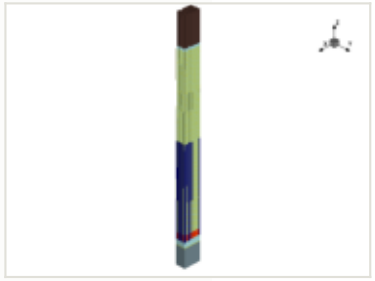

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

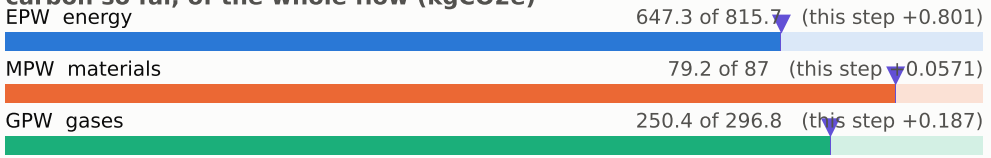

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

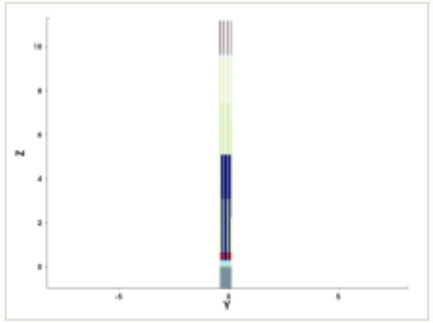

y cut at -0.150 µm

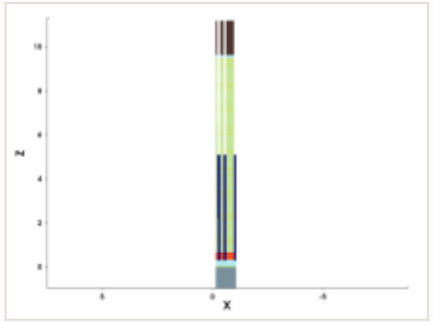

mask for this step

no mask for this step

steps by process area

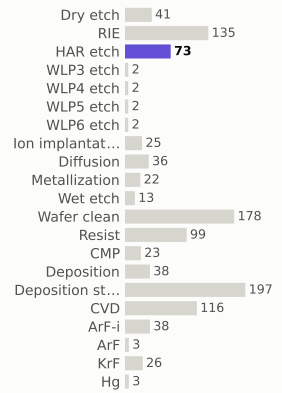

materials deposited (g)

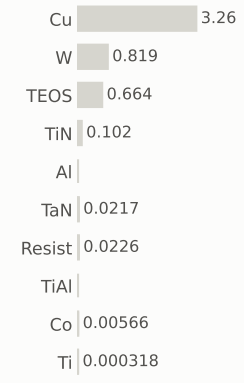

gases emitted (g)

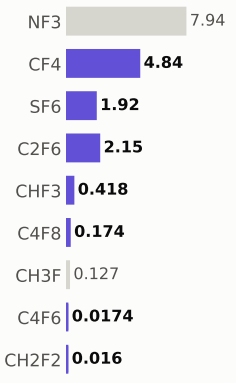

Step #19664.795899999997: HAR_etch

etch_noop · HAR_etch

1.04	978.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

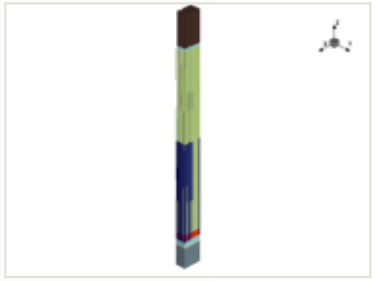

x cut at -0.570 µm

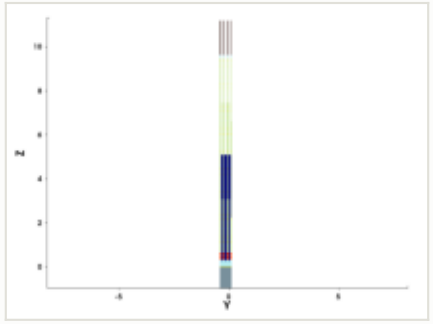

y cut at -0.150 µm

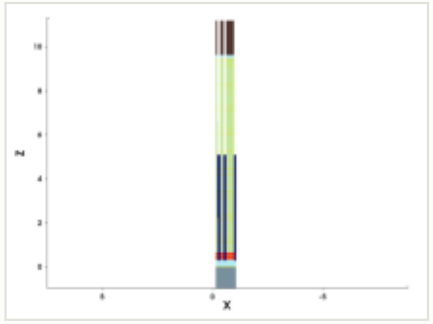

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

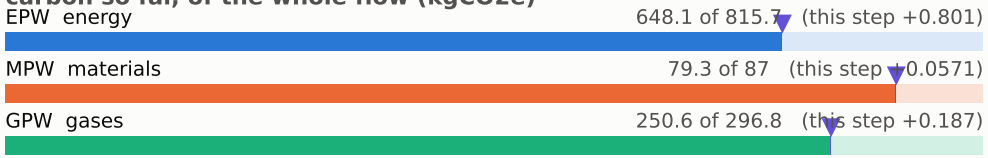

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

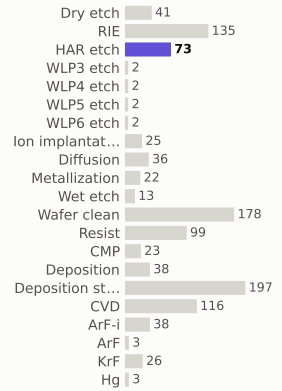

materials deposited (g)

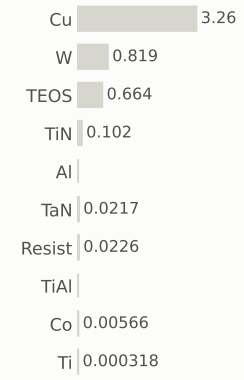

gases emitted (g)

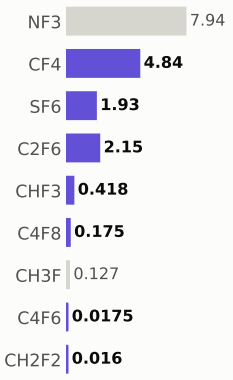

Step #19664.898: HAR_etch

etch_noop · HAR_etch

1.04	979.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

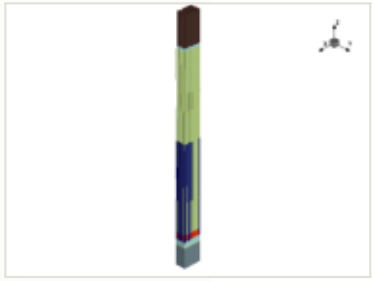

x cut at -0.570 µm

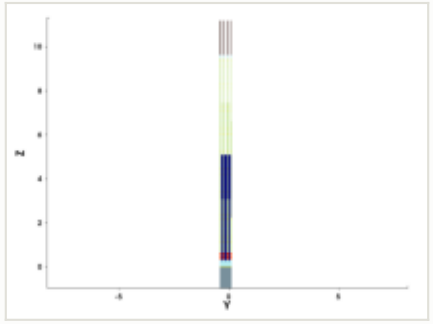

y cut at -0.150 µm

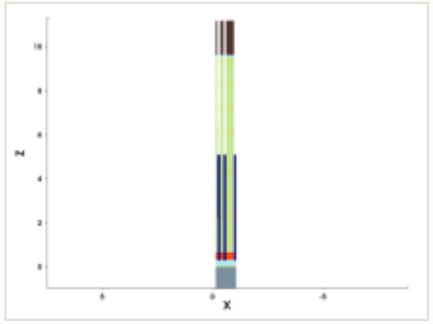

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

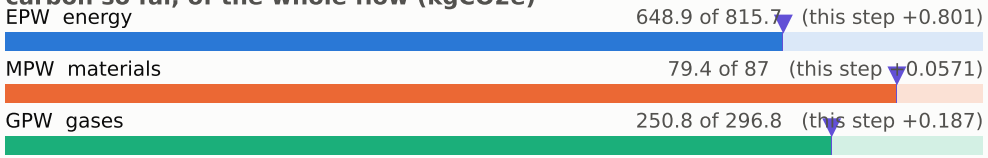

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

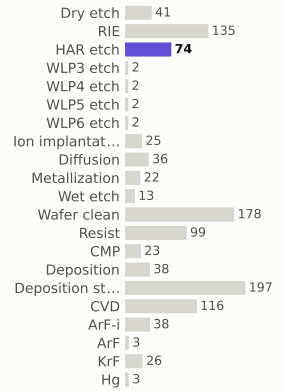

materials deposited (g)

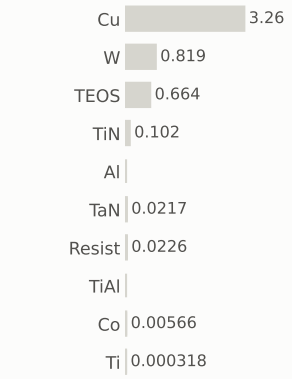

gases emitted (g)

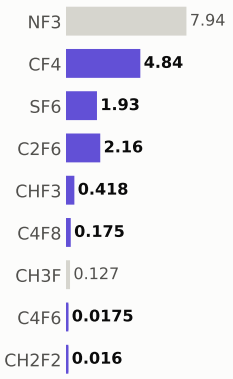

Step #19665: HAR_etch

etch_noop · HAR_etch

1.04	980.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

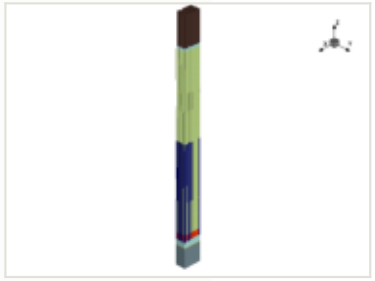

x cut at -0.570 µm

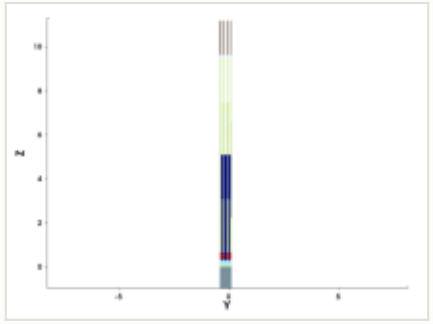

y cut at -0.150 µm

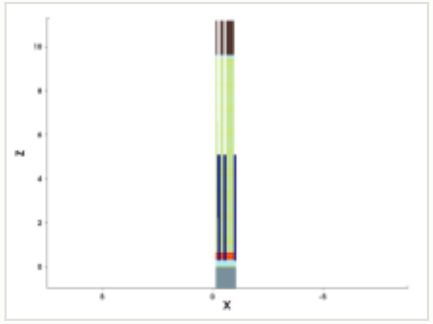

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

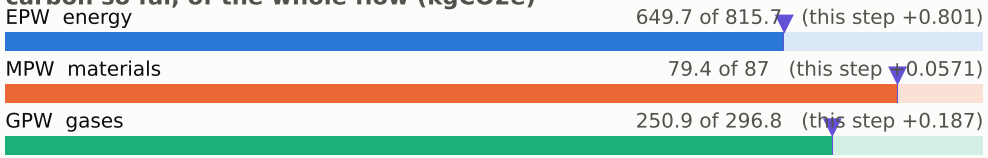

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

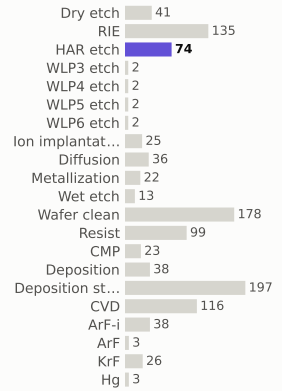

materials deposited (g)

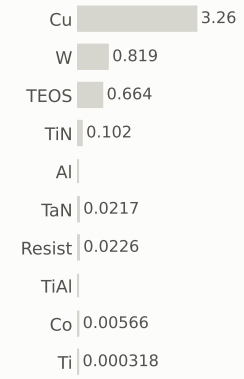

gases emitted (g)

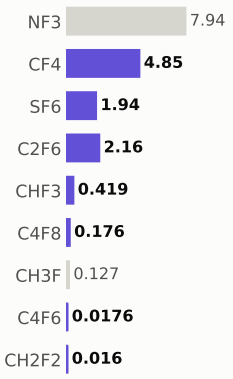

Step #19665.102: HAR_etch

etch_noop · HAR_etch

1.04	981.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

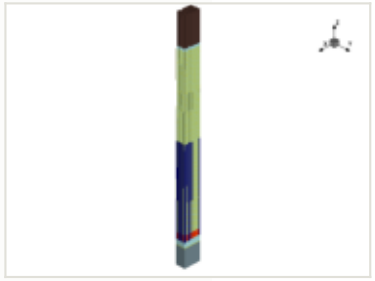

x cut at -0.570 µm

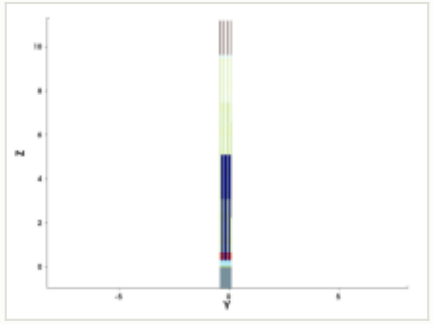

y cut at -0.150 µm

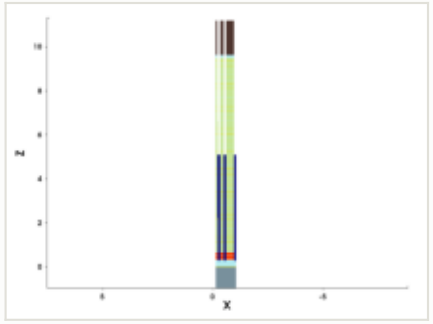

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

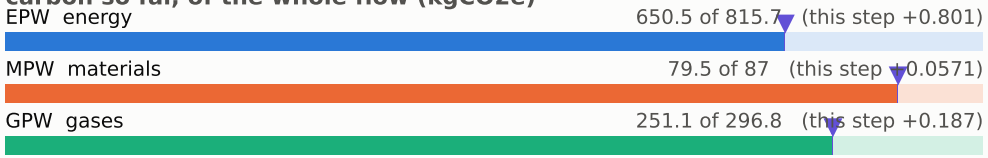

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

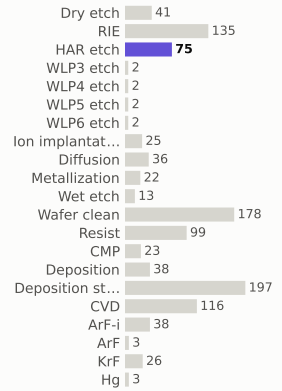

materials deposited (g)

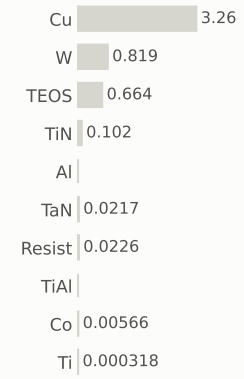

gases emitted (g)

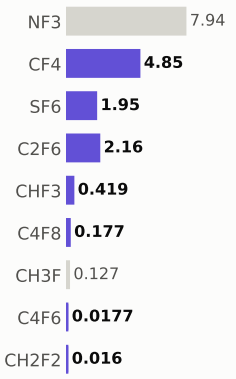

Step #19665.204100000003: HAR_etch

etch_noop · HAR_etch

1.04	982.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

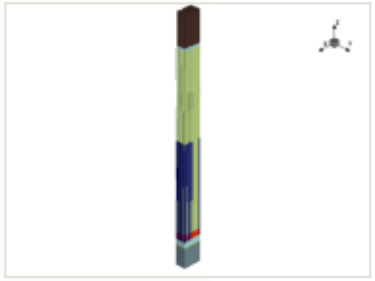

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

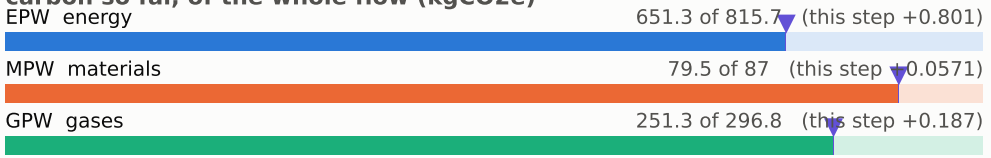

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

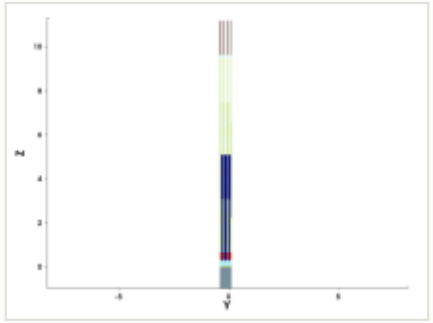

y cut at -0.150 µm

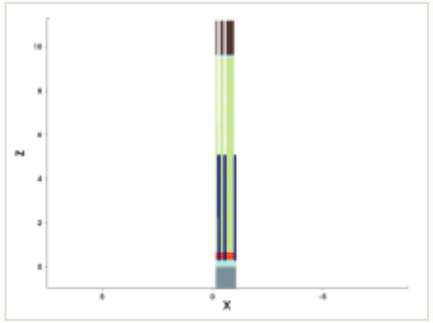

mask for this step

no mask for this step

steps by process area

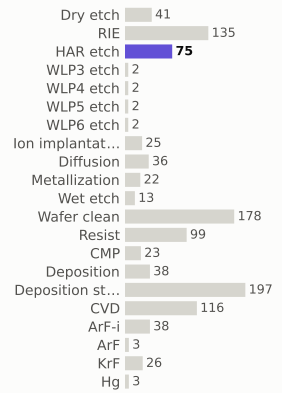

materials deposited (g)

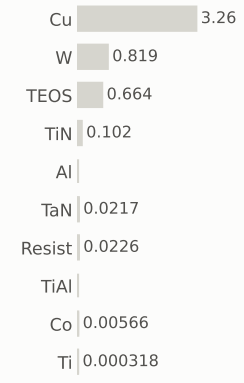

gases emitted (g)

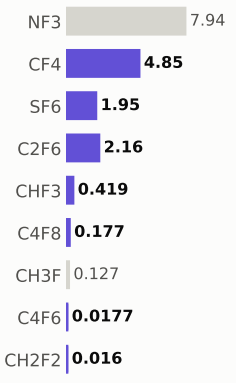

Step #19665.3061: HAR_etch

etch_noop · HAR_etch

1.04	983.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

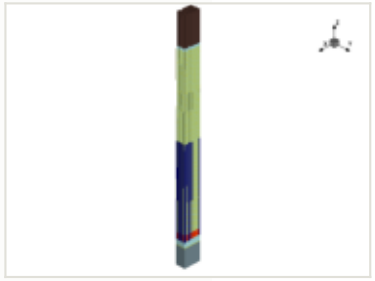

x cut at -0.570 µm

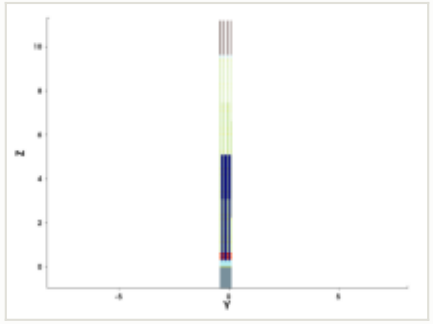

y cut at -0.150 µm

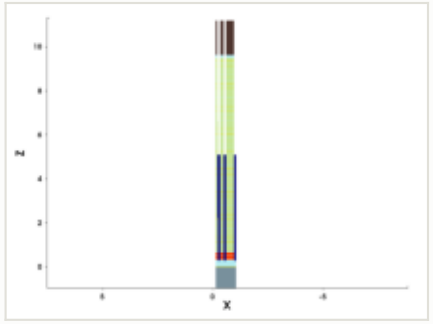

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

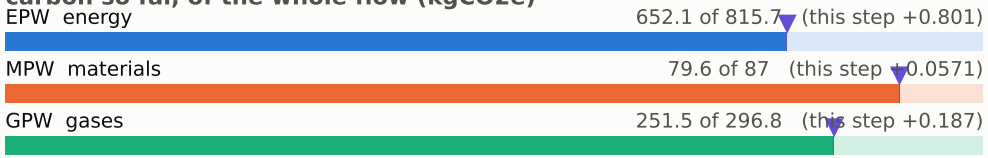

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

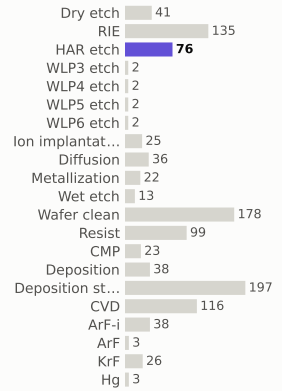

materials deposited (g)

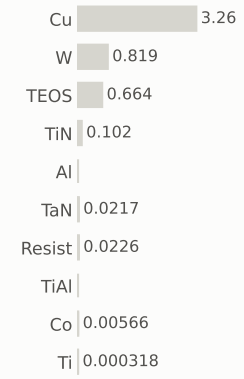

gases emitted (g)

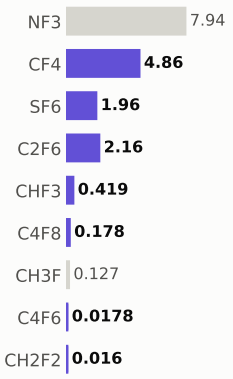

Step #19665.408199999998: HAR_etch

etch_noop · HAR_etch

1.04	984.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

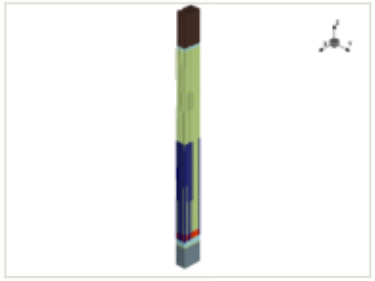

x cut at -0.570 µm

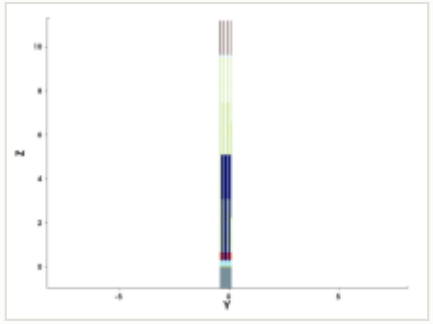

y cut at -0.150 µm

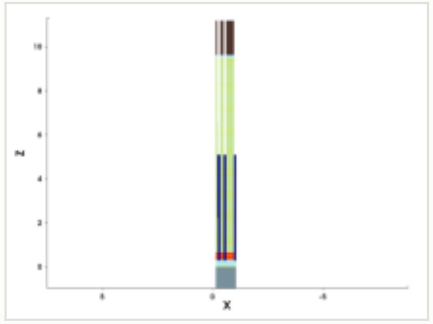

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

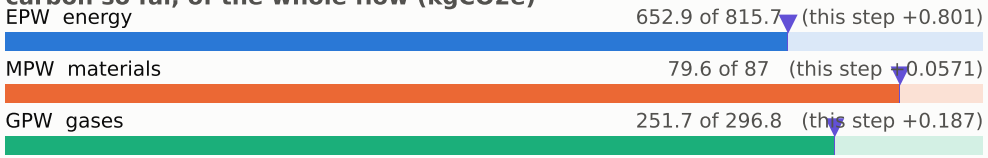

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

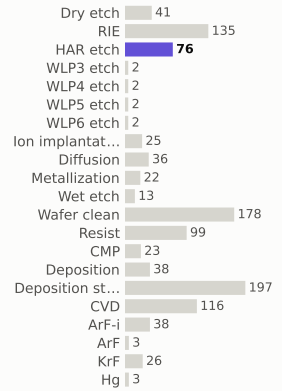

materials deposited (g)

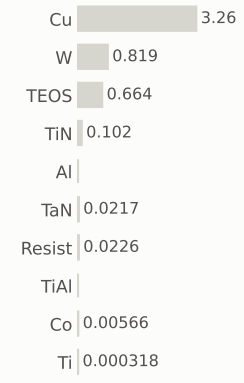

gases emitted (g)

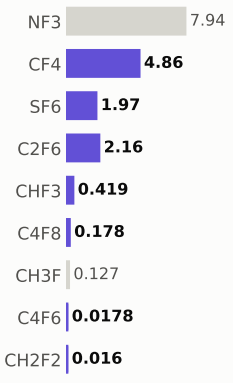

Step #19665.5102: HAR_etch

etch_noop · HAR_etch

1.04	985.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

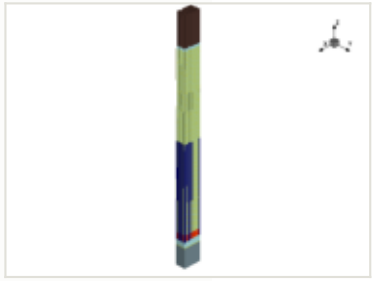

x cut at -0.570 µm

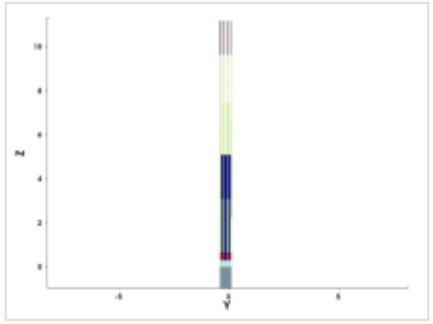

y cut at -0.150 µm

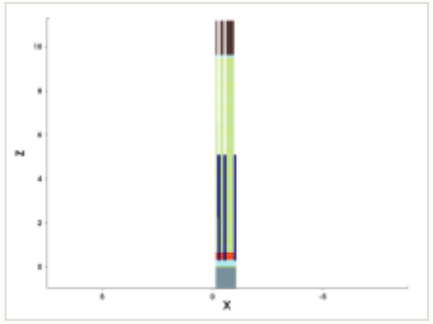

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

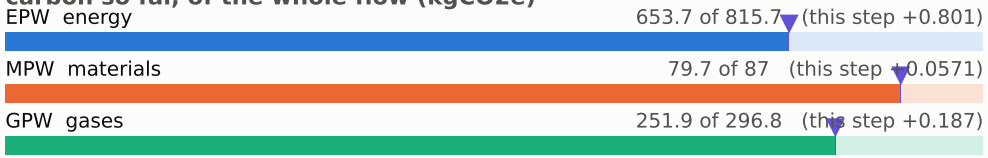

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

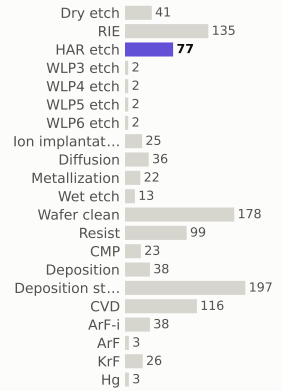

materials deposited (g)

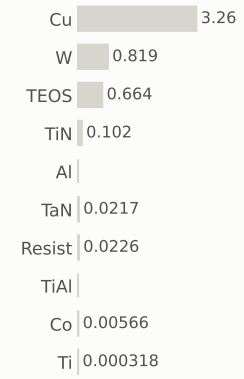

gases emitted (g)

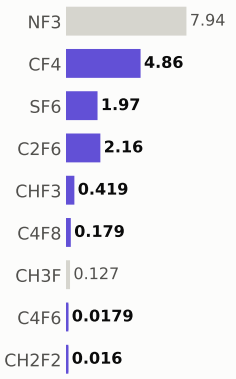

Step #19665.6122: HAR_etch

etch_noop · HAR_etch

1.04	986.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

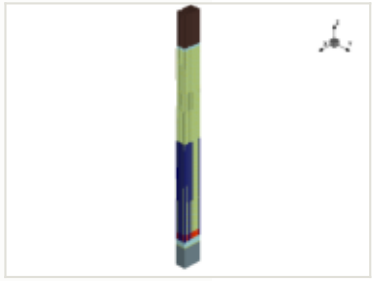

x cut at -0.570 µm

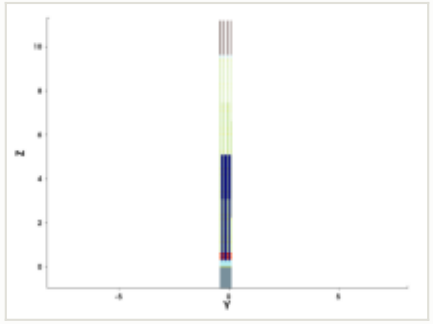

y cut at -0.150 µm

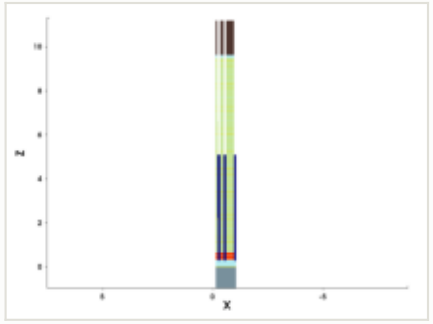

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

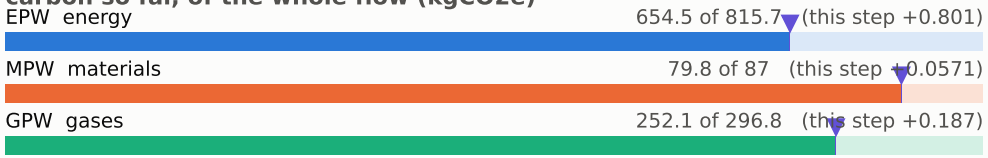

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

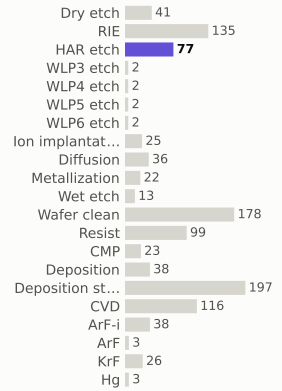

materials deposited (g)

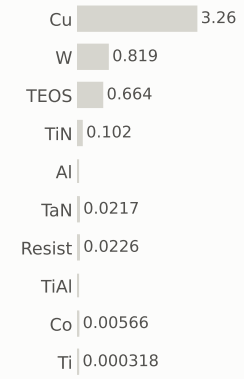

gases emitted (g)

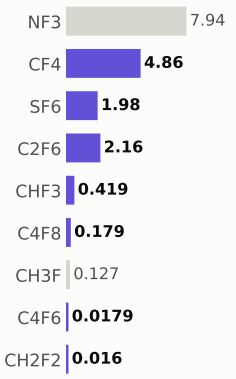

Step #19665.7143: HAR_etch

etch_noop · HAR_etch

1.04	987.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

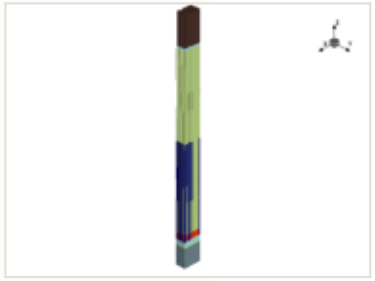

x cut at -0.570 µm

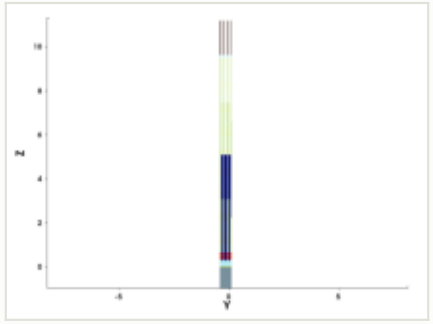

y cut at -0.150 µm

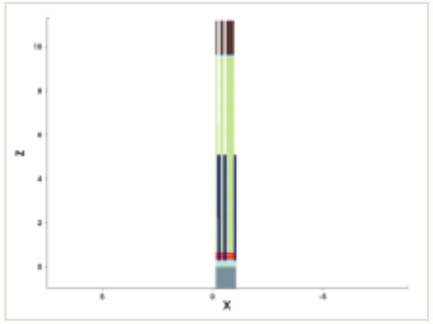

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

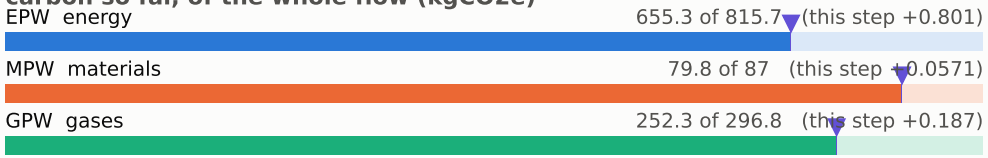

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

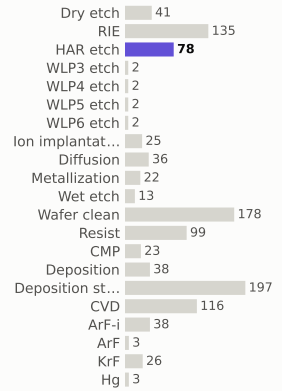

materials deposited (g)

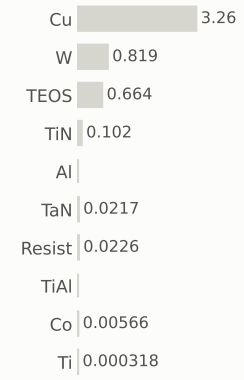

gases emitted (g)

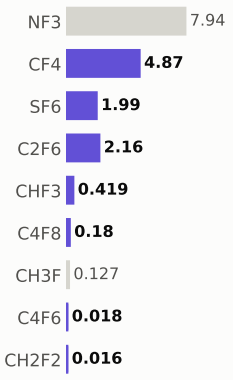

Step #19665.8163: HAR_etch

etch_noop · HAR_etch

1.04	988.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

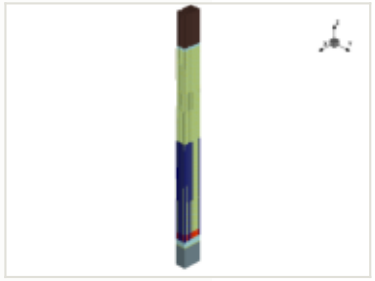

x cut at -0.570 µm

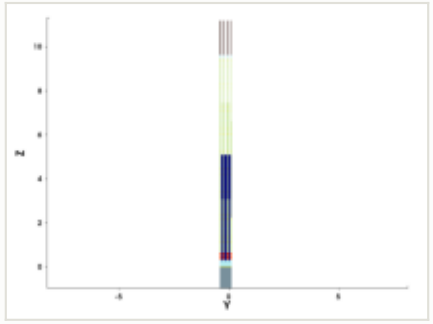

y cut at -0.150 µm

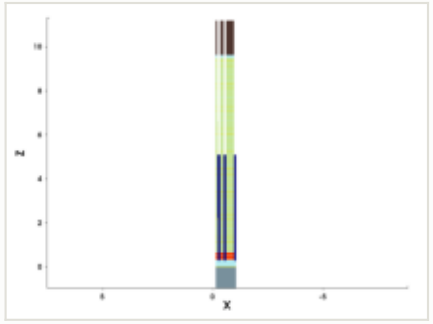

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

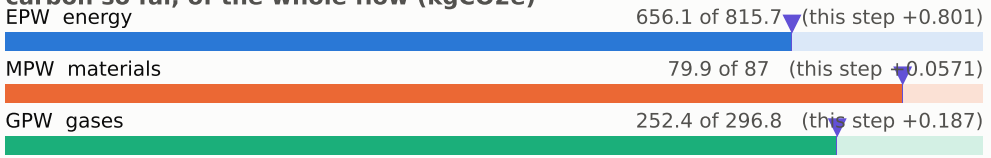

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

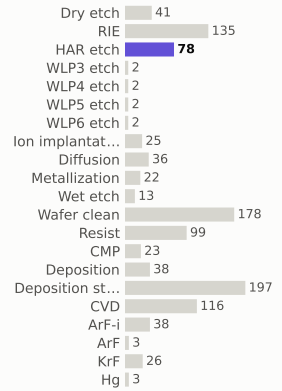

materials deposited (g)

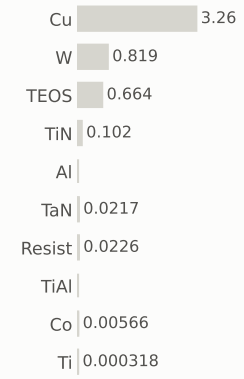

gases emitted (g)

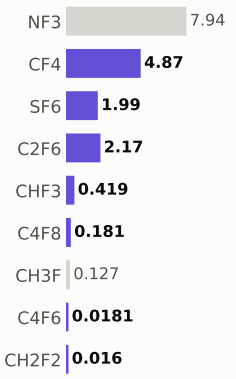

Step #19665.918400000002: HAR_etch

etch_noop · HAR_etch

1.04	989.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

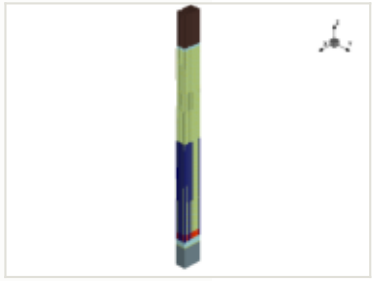

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

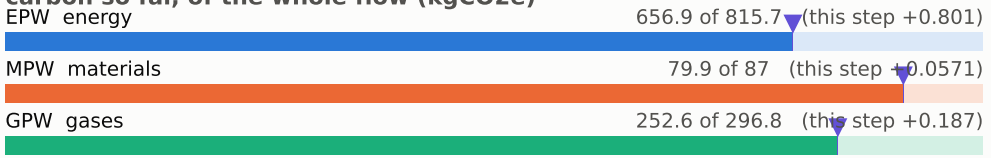

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

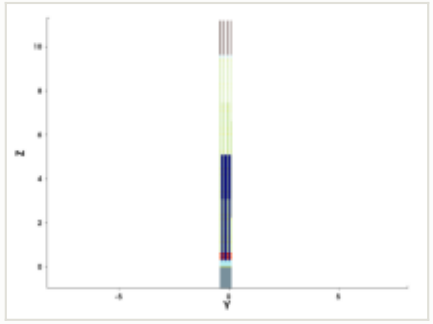

y cut at -0.150 µm

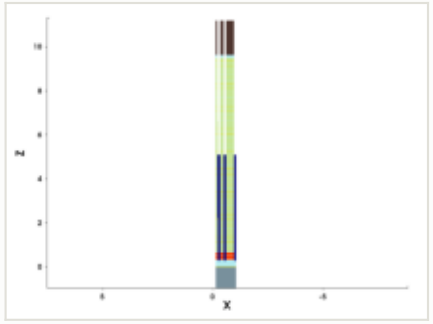

mask for this step

no mask for this step

steps by process area

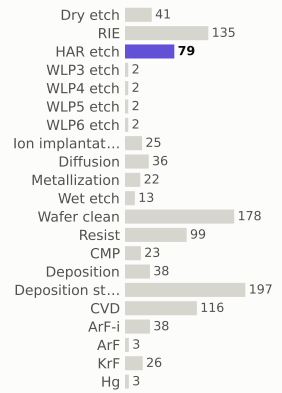

materials deposited (g)

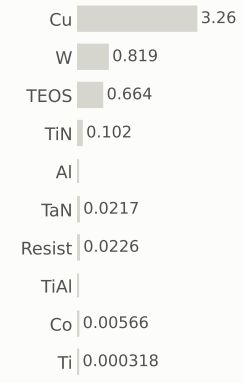

gases emitted (g)

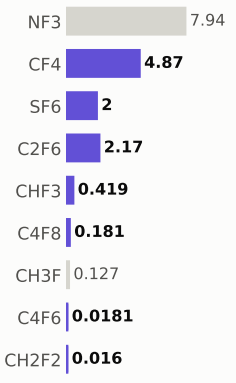

Step #19666.0204: HAR_etch

etch_noop · HAR_etch

1.04	990.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

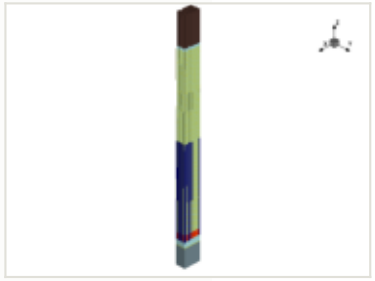

x cut at -0.570 µm

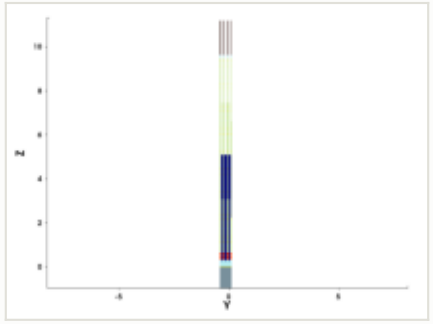

y cut at -0.150 µm

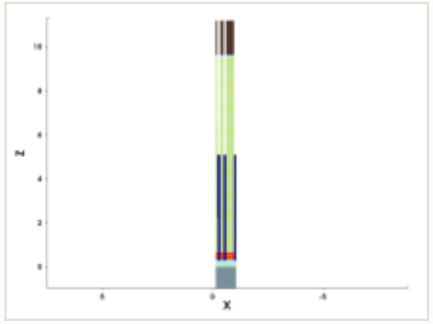

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

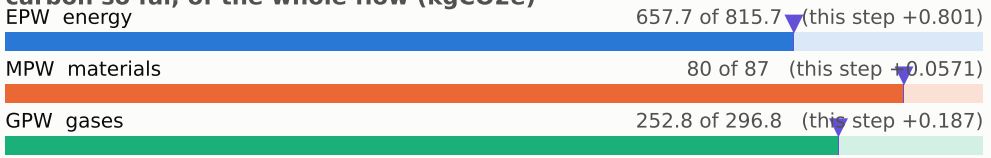

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

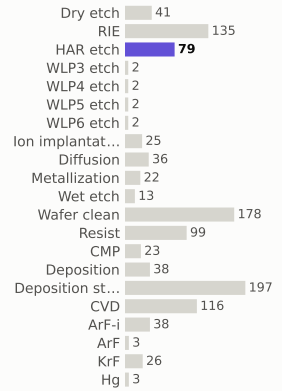

materials deposited (g)

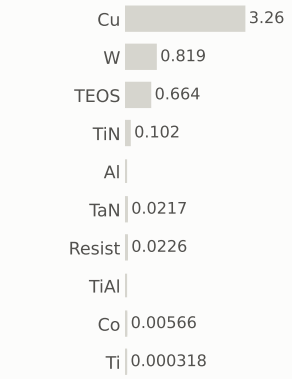

gases emitted (g)

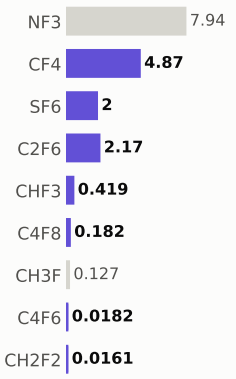

Step #19666.1224: HAR_etch

etch_noop · HAR_etch

1.04	991.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

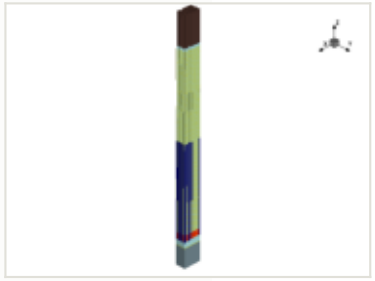

x cut at -0.570 µm

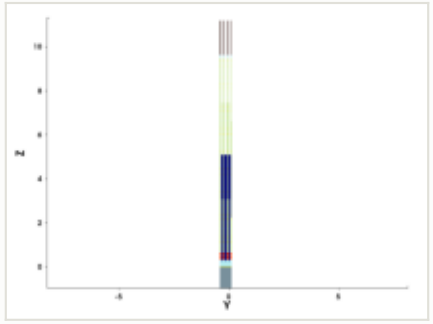

y cut at -0.150 µm

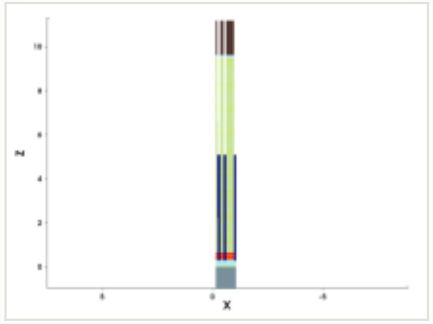

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

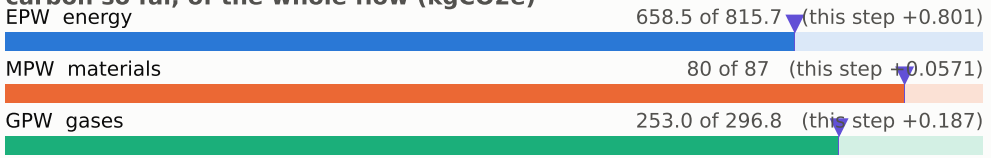

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

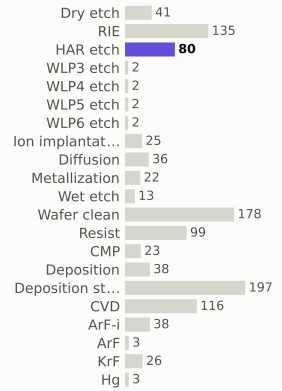

materials deposited (g)

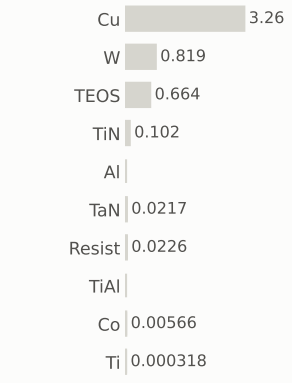

gases emitted (g)

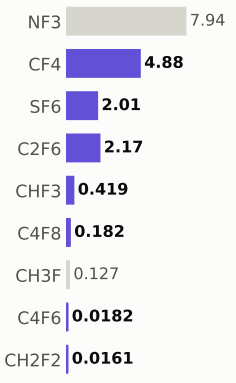

Step #19666.2245: HAR_etch

etch_noop · HAR_etch

1.04	992.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

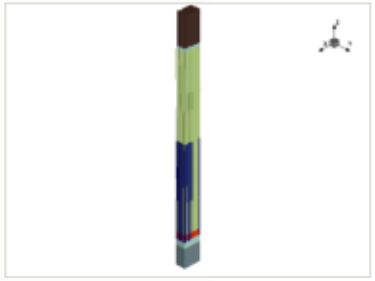

x cut at -0.570 µm

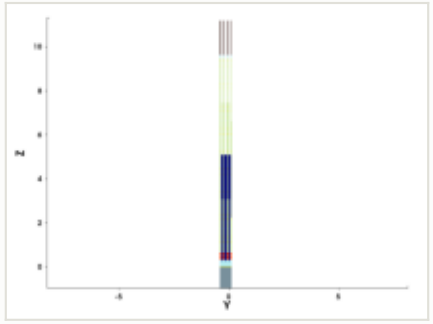

y cut at -0.150 µm

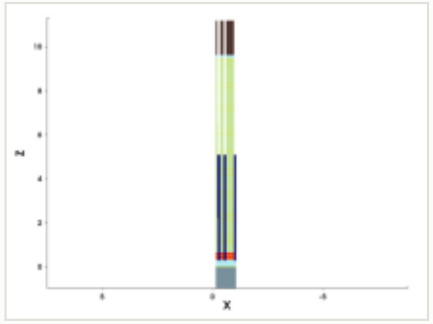

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

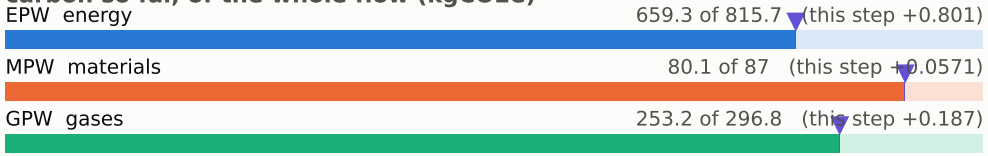

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

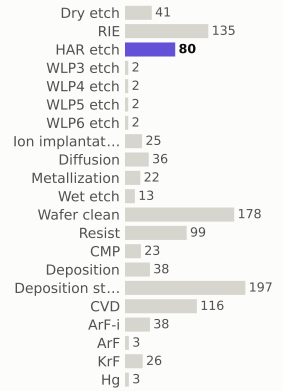

materials deposited (g)

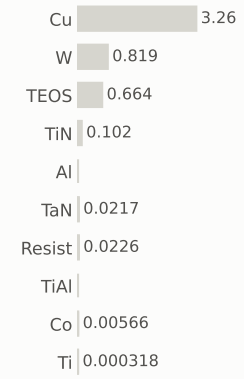

gases emitted (g)

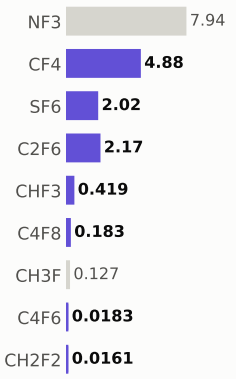

Step #19666.3265: HAR_etch

etch_noop · HAR_etch

1.04	993.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

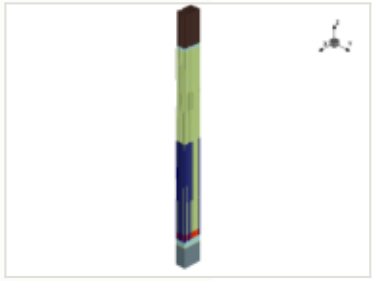

x cut at -0.570 µm

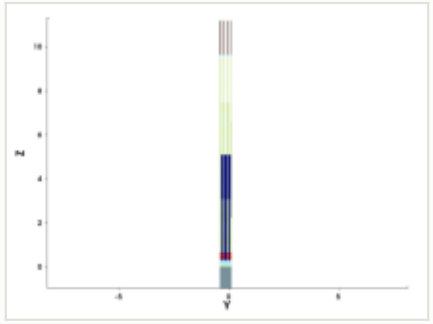

y cut at -0.150 µm

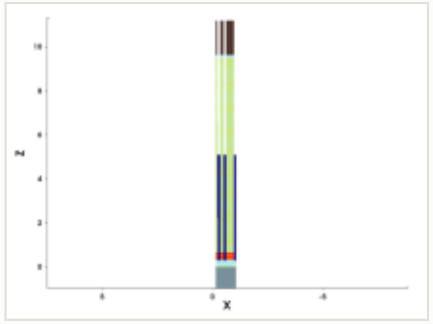

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

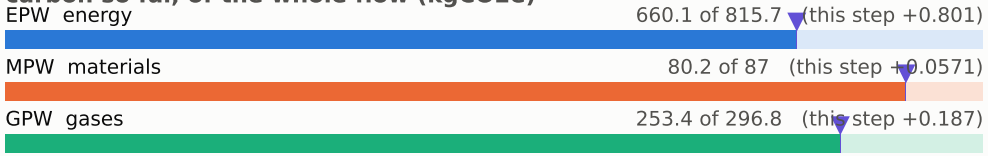

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

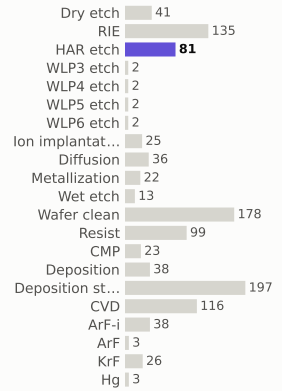

materials deposited (g)

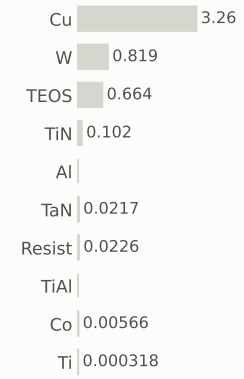

gases emitted (g)

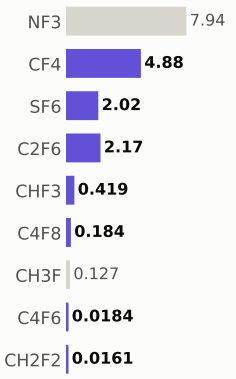

Step #19666.4286: HAR_etch

etch_noop · HAR_etch

1.04	994.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

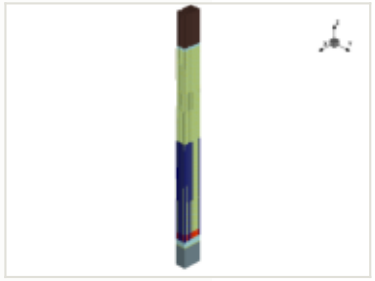

x cut at -0.570 µm

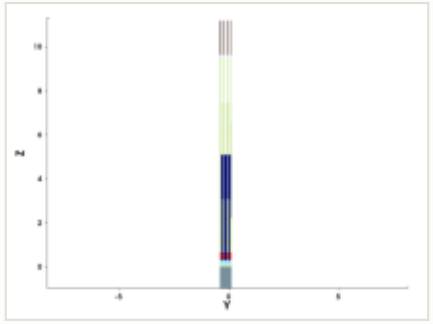

y cut at -0.150 µm

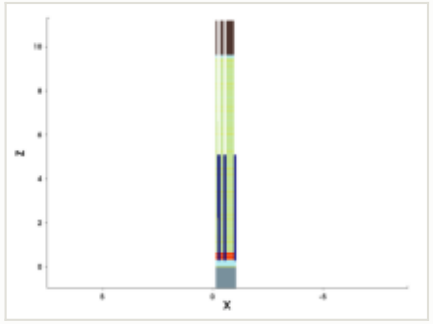

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

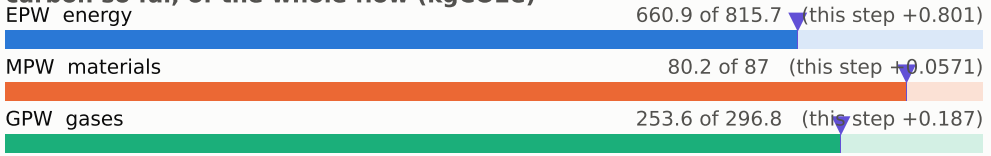

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

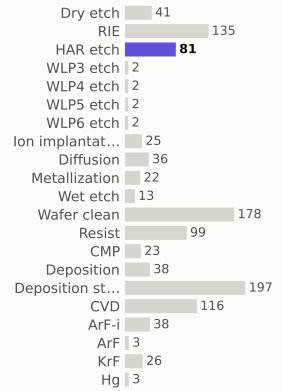

materials deposited (g)

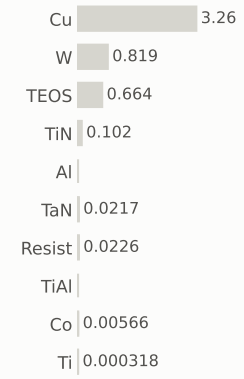

gases emitted (g)

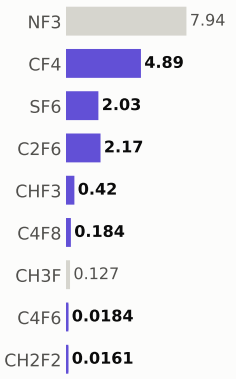

Step #19666.5306: HAR_etch

etch_noop · HAR_etch

1.04	995.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

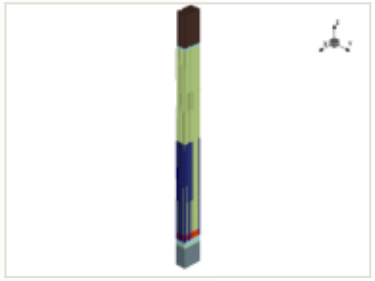

x cut at -0.570 µm

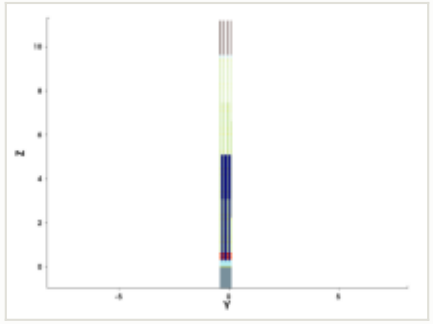

y cut at -0.150 µm

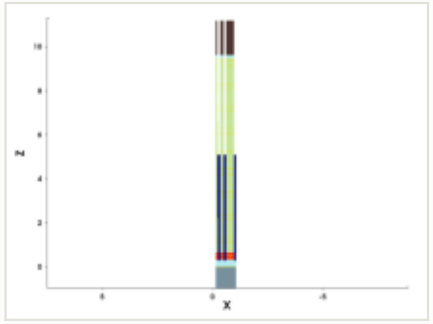

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

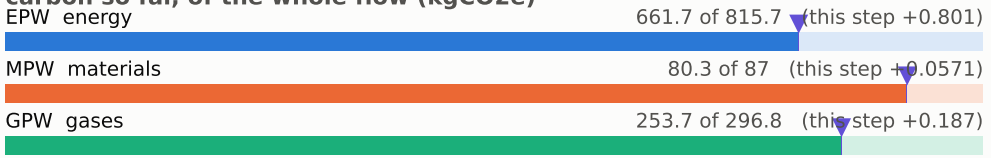

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

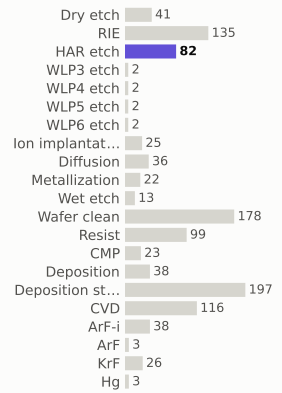

materials deposited (g)

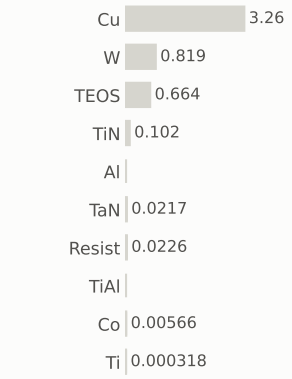

gases emitted (g)

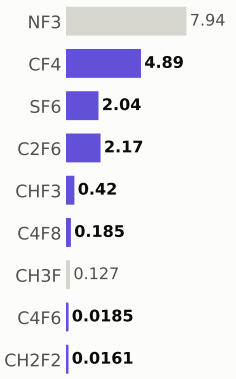

Step #19666.632700000002: HAR_etch

etch_noop · HAR_etch

1.04	996.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

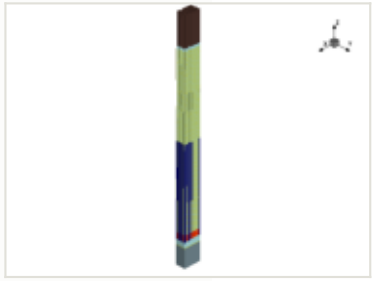

x cut at -0.570 µm

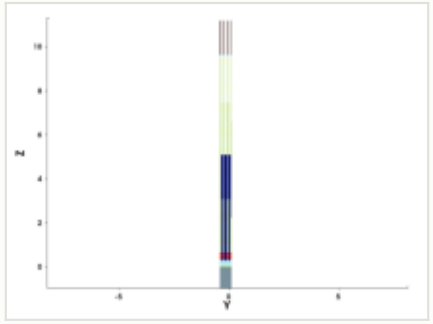

y cut at -0.150 µm

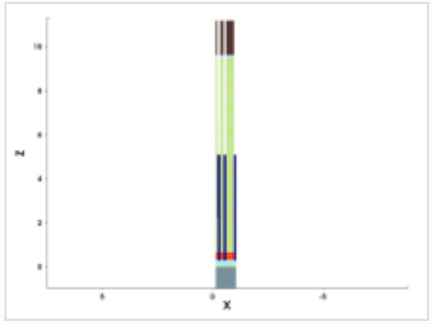

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

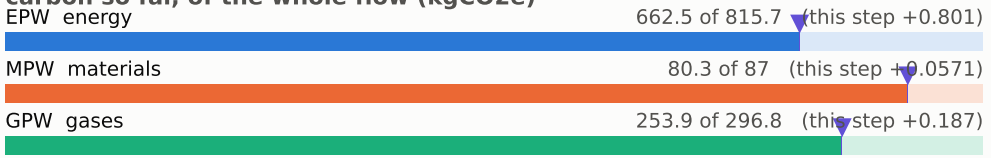

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

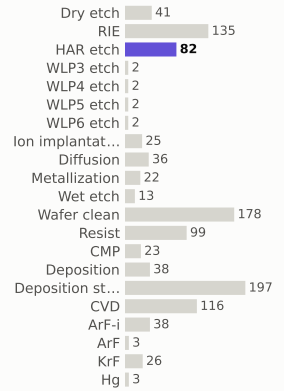

materials deposited (g)

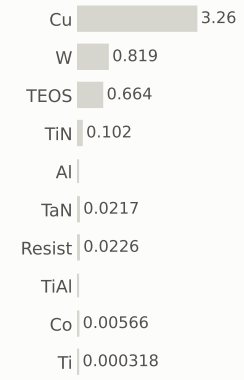

gases emitted (g)

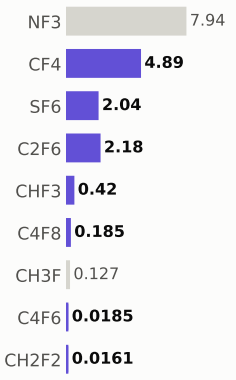

Step #19666.7347: HAR_etch

etch_noop · HAR_etch

1.04	997.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

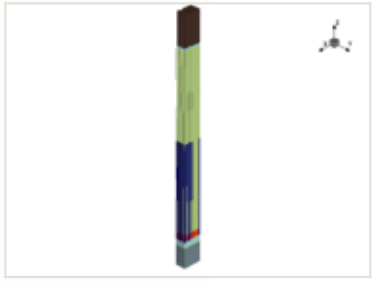

x cut at -0.570 µm

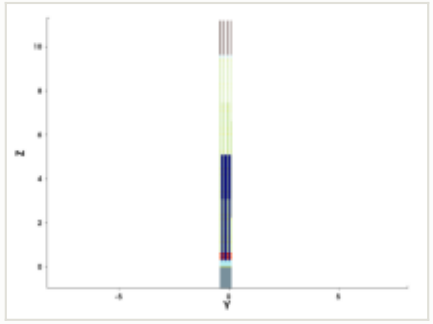

y cut at -0.150 µm

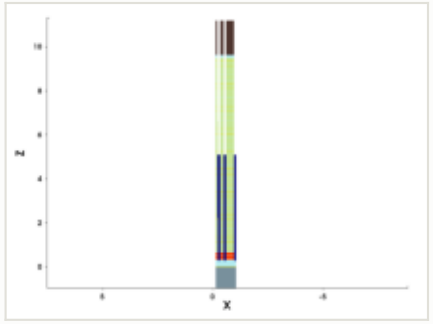

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

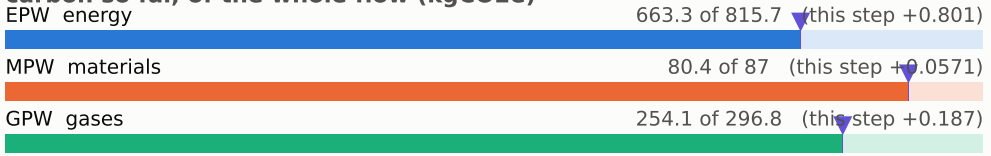

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

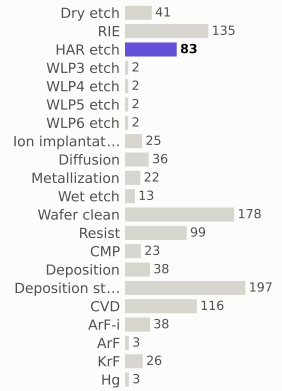

materials deposited (g)

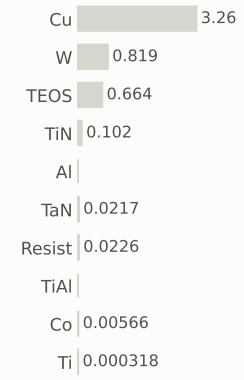

gases emitted (g)

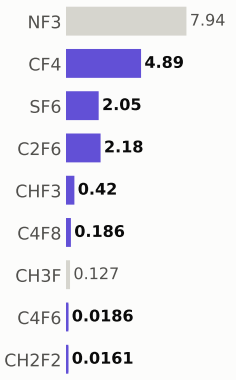

Step #19666.8367: HAR_etch

etch_noop · HAR_etch

1.04	998.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

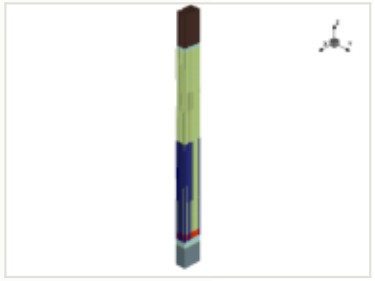

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

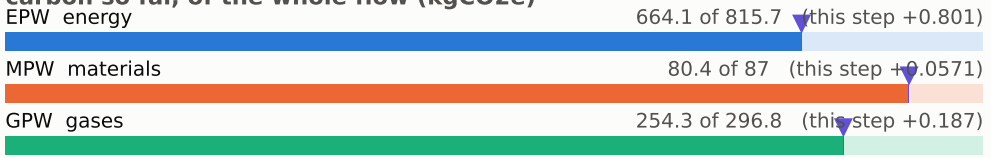

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

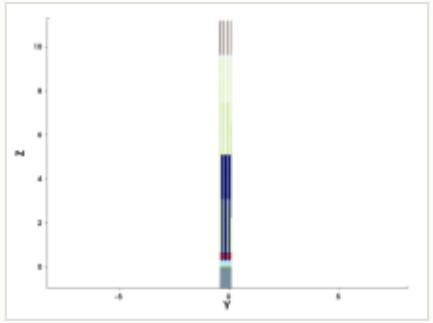

y cut at -0.150 µm

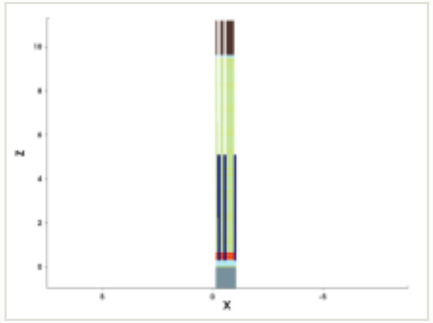

mask for this step

no mask for this step

steps by process area

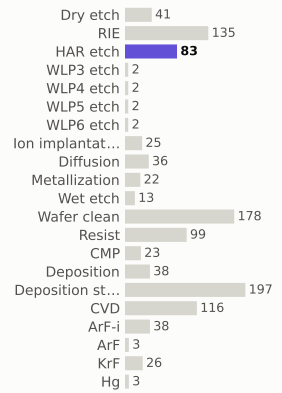

materials deposited (g)

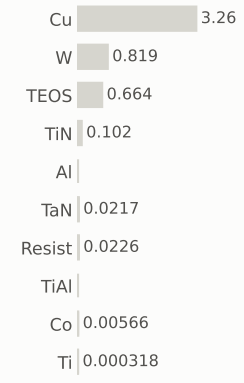

gases emitted (g)

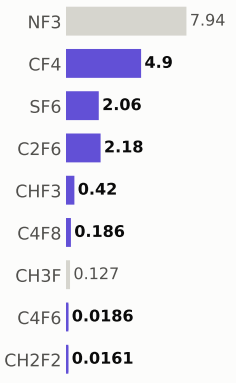

Step #19666.9388: HAR_etch

etch_noop · HAR_etch

1.04	999.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

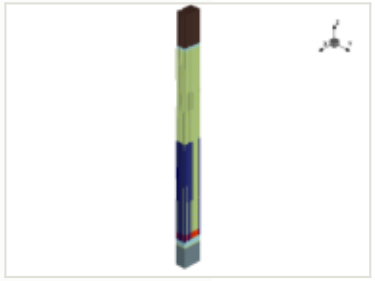

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

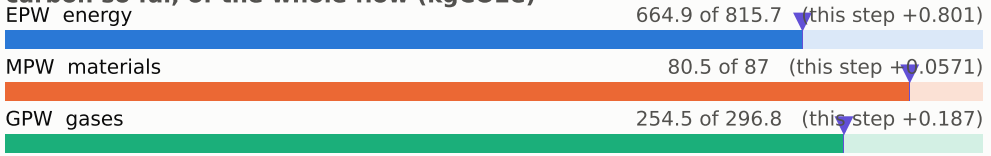

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

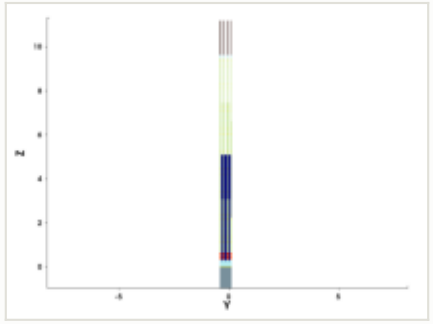

y cut at -0.150 µm

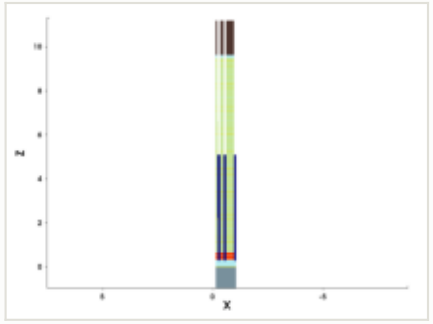

mask for this step

no mask for this step

steps by process area

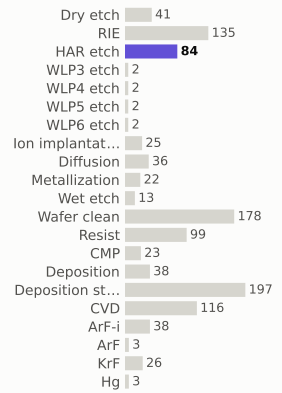

materials deposited (g)

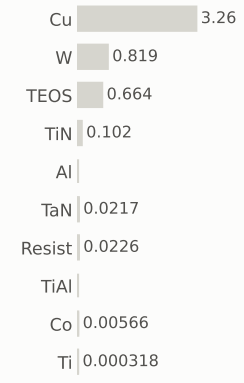

gases emitted (g)

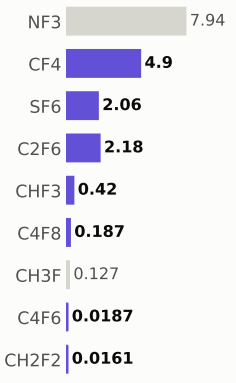

Step #19667.040800000002: HAR_etch

etch_noop · HAR_etch

1.04	1,001.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

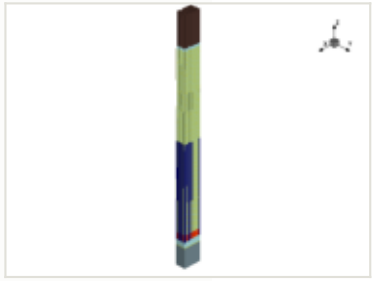

x cut at -0.570 µm

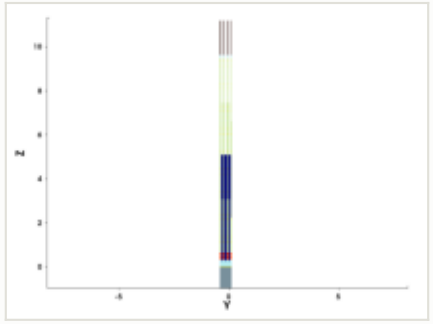

y cut at -0.150 µm

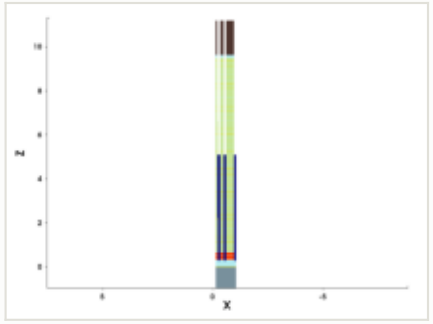

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

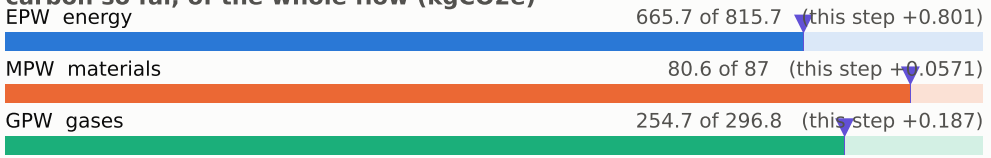

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

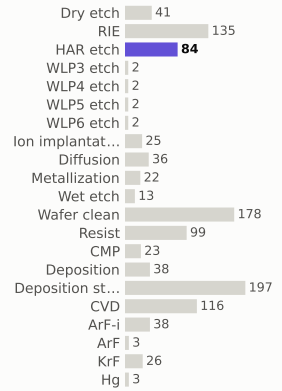

materials deposited (g)

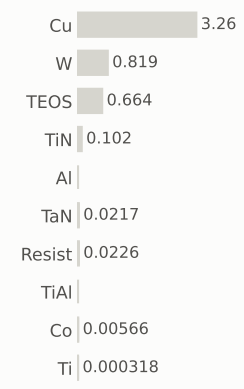

gases emitted (g)

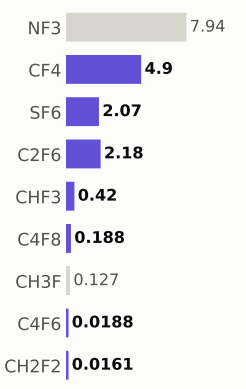

Step #19667.1429: HAR_etch

etch_noop · HAR_etch

1.04	1,002.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

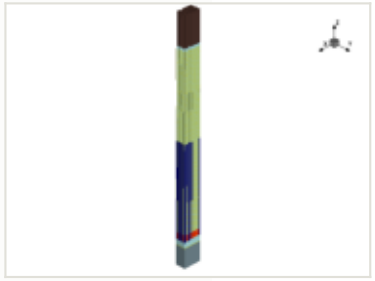

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

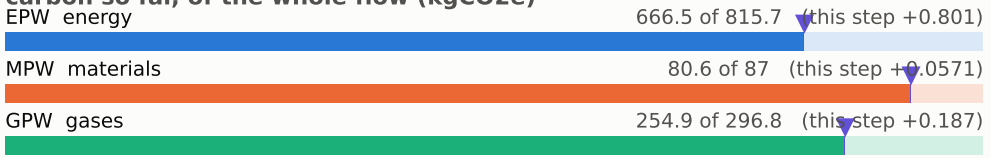

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

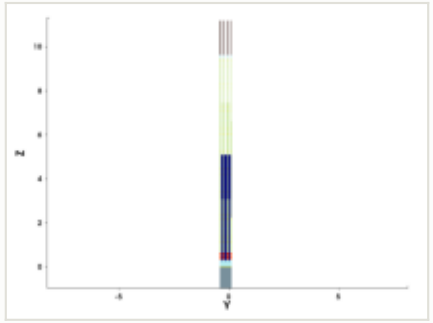

y cut at -0.150 µm

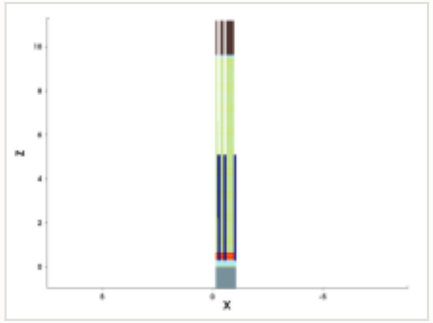

mask for this step

no mask for this step

steps by process area

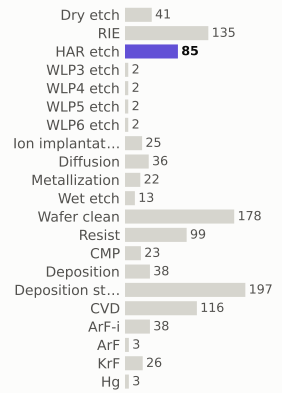

materials deposited (g)

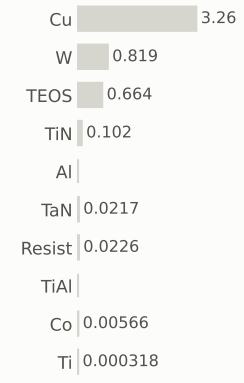

gases emitted (g)

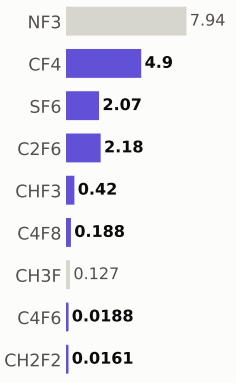

Step #19667.244899999998: HAR_etch

etch_noop · HAR_etch

1.04	1,003.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

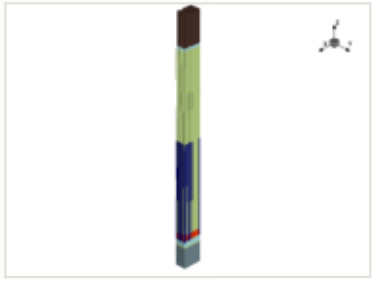

x cut at -0.570 µm

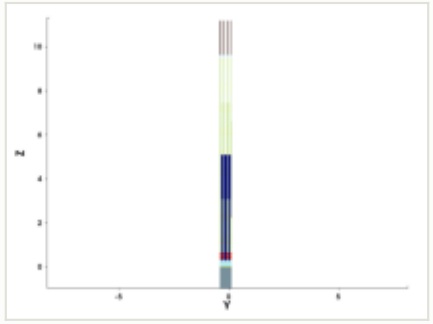

y cut at -0.150 µm

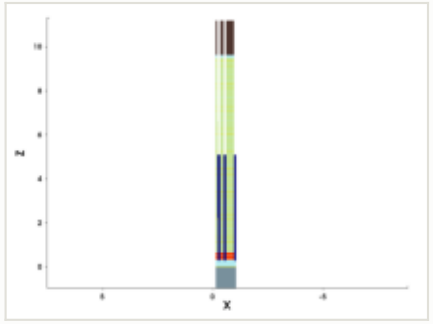

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

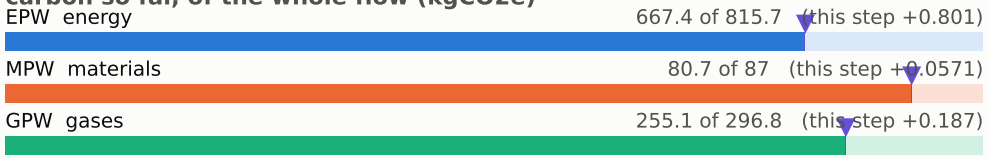

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

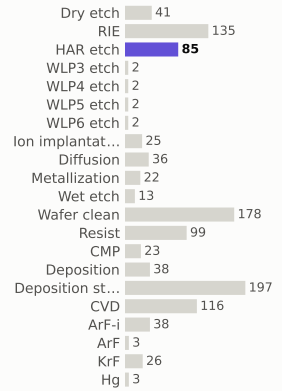

materials deposited (g)

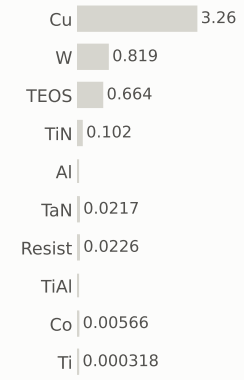

gases emitted (g)

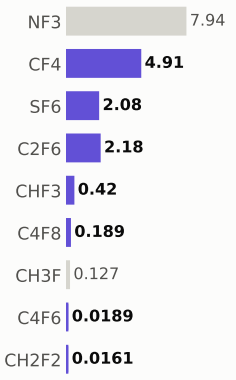

Step #19667.3469: HAR_etch

etch_noop · HAR_etch

1.04	1,004.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

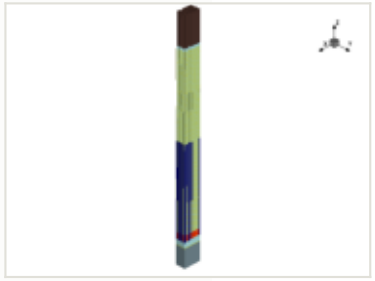

x cut at -0.570 µm

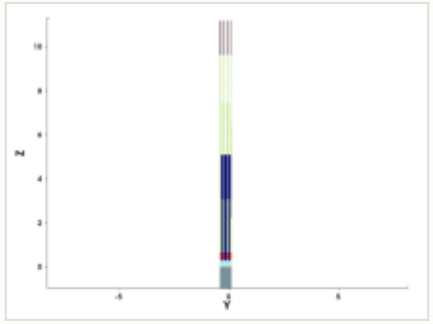

y cut at -0.150 µm

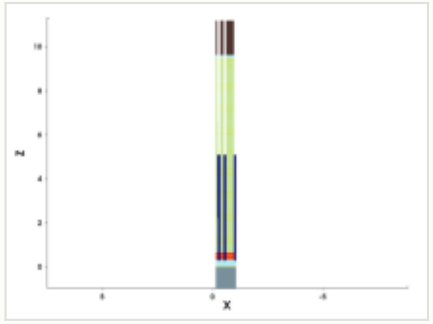

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

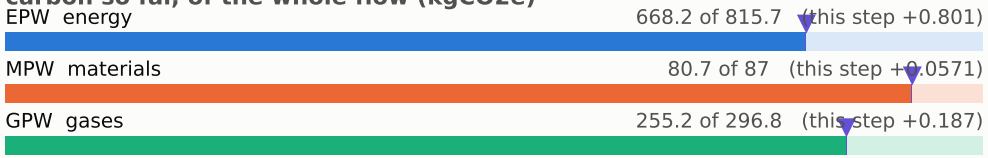

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

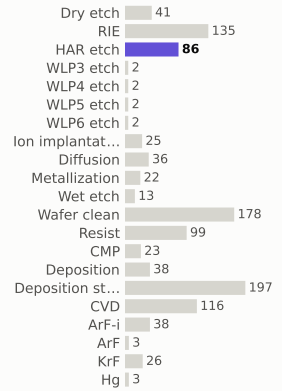

materials deposited (g)

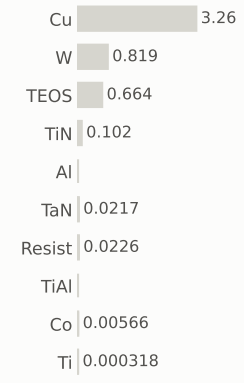

gases emitted (g)

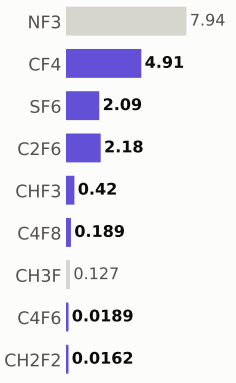

Step #19667.449: HAR_etch

etch_noop · HAR_etch

1.04	1,005.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

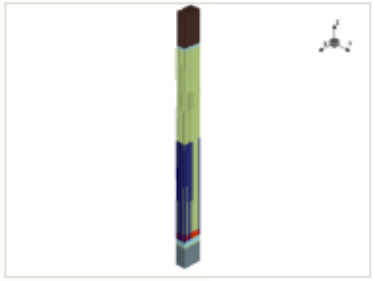

x cut at -0.570 µm

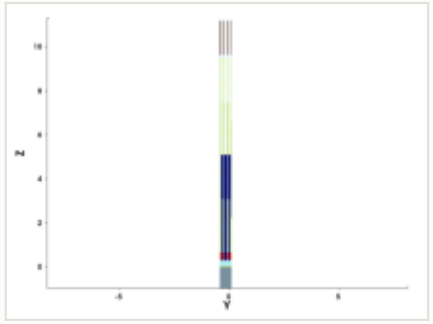

y cut at -0.150 µm

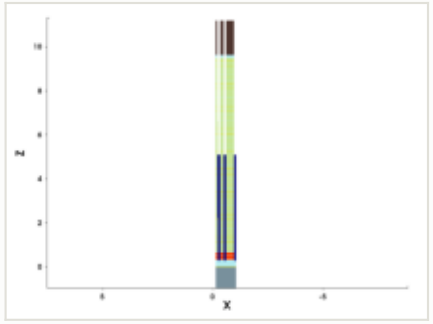

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

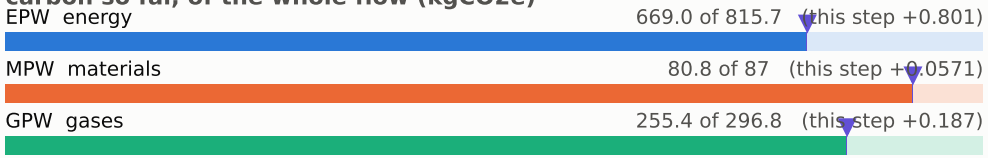

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

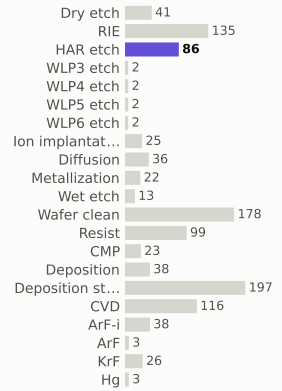

materials deposited (g)



gases emitted (g)

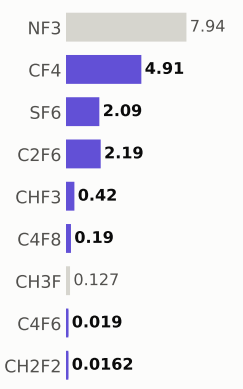

Step #19667.551: HAR_etch

etch_noop · HAR_etch

1.04	1,006.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

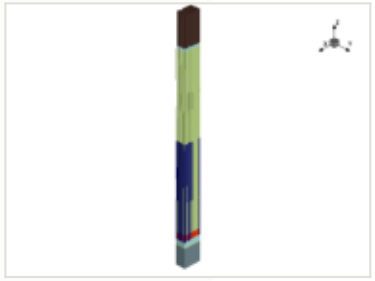

x cut at -0.570 µm

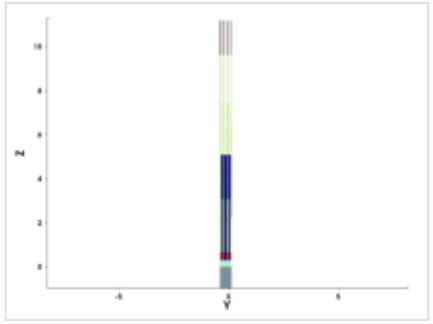

y cut at -0.150 µm

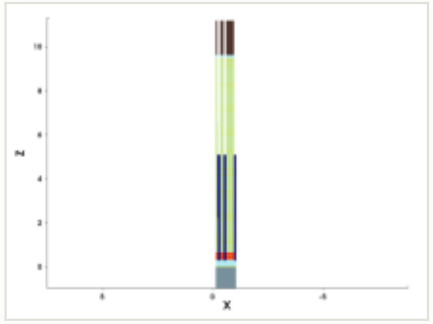

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

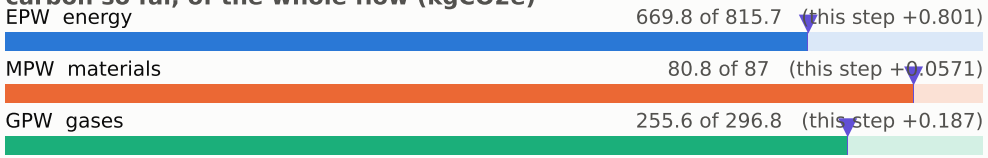

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

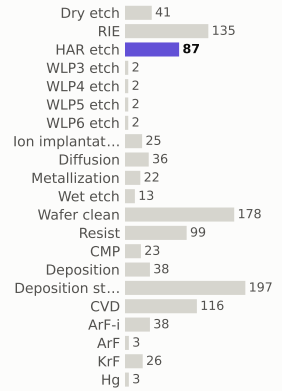

materials deposited (g)

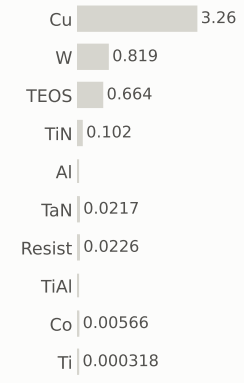

gases emitted (g)

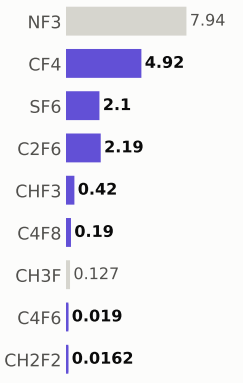

Step #19667.6531: HAR_etch

etch_noop · HAR_etch

1.04	1,007.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

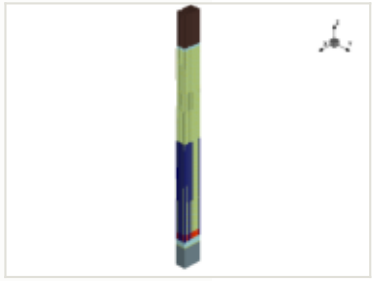

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

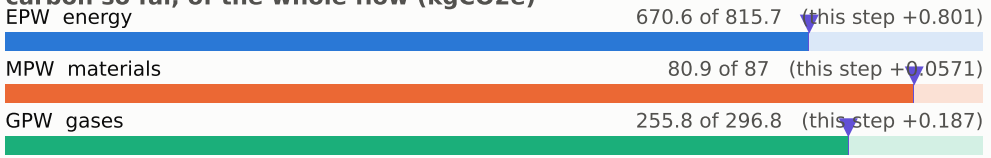

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

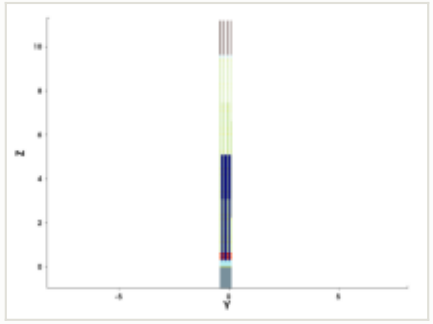

y cut at -0.150 µm

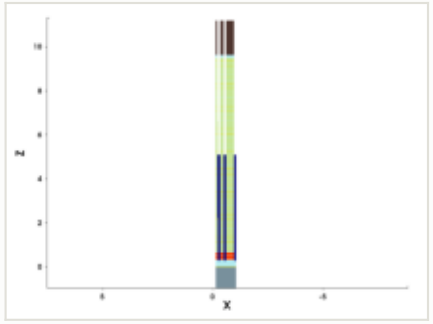

mask for this step

no mask for this step

steps by process area

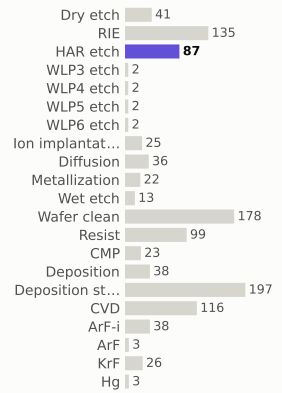

materials deposited (g)

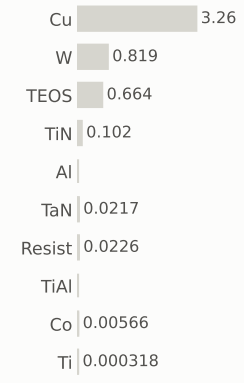

gases emitted (g)

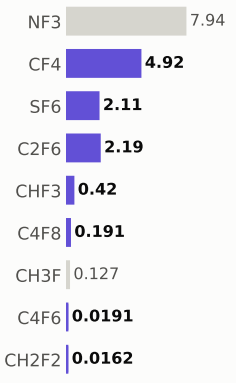

Step #19667.755100000002: HAR_etch

etch_noop · HAR_etch

1.04	1,008.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

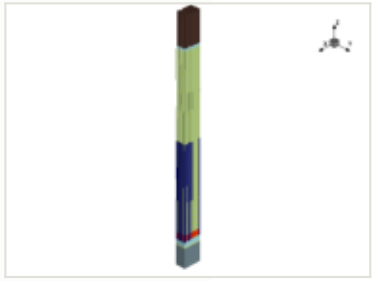

x cut at -0.570 µm

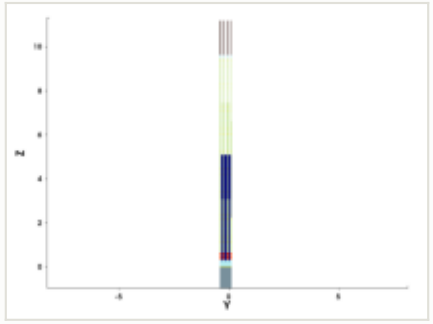

y cut at -0.150 µm

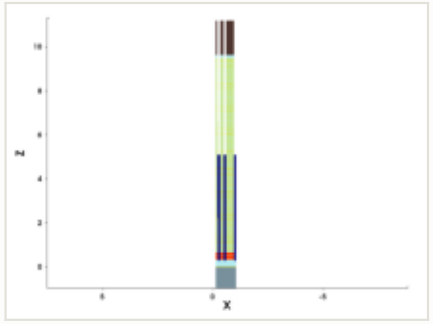

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

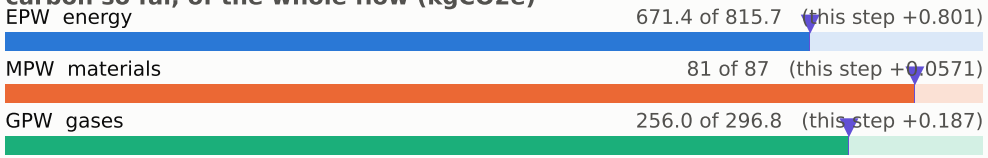

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

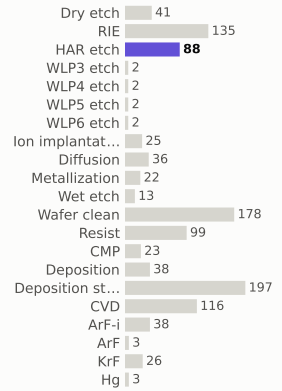

materials deposited (g)

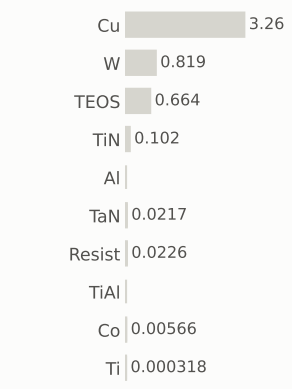

gases emitted (g)

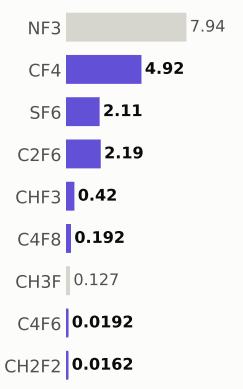

Step #19667.8571: HAR_etch

etch_noop · HAR_etch

1.04	1,009.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

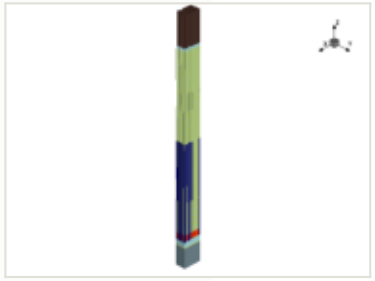

x cut at -0.570 µm

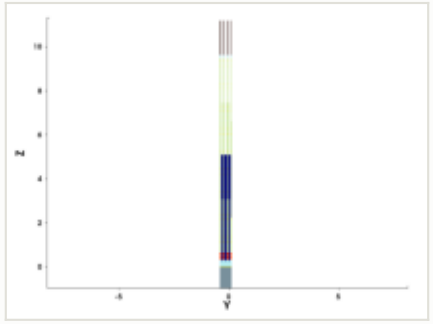

y cut at -0.150 µm

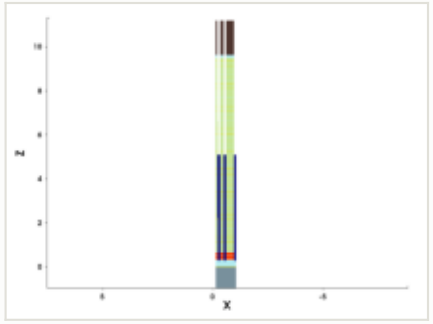

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

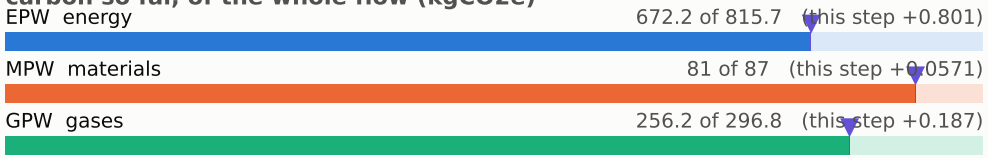

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

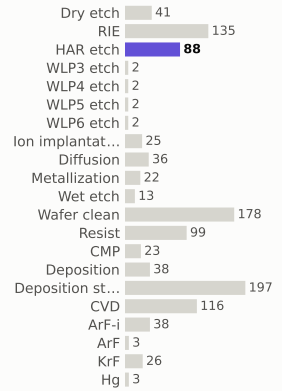

materials deposited (g)

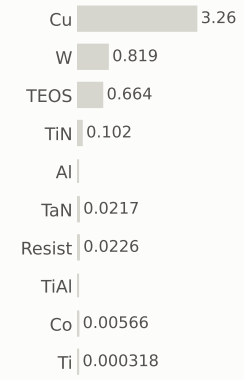

gases emitted (g)

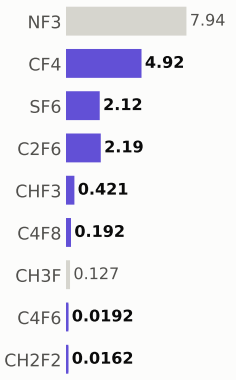

Step #19667.959199999998: HAR_etch

etch_noop · HAR_etch

1.04	1,010.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

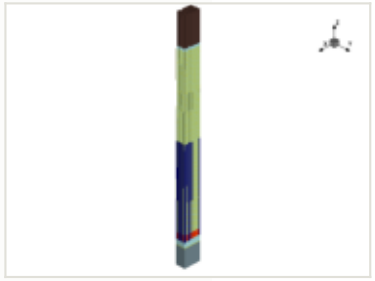

x cut at -0.570 µm

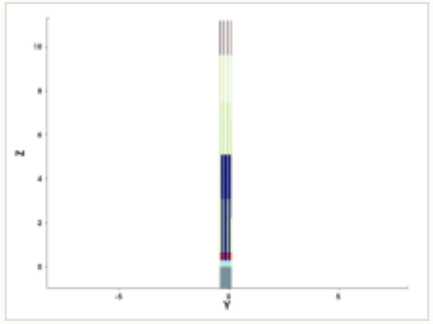

y cut at -0.150 µm

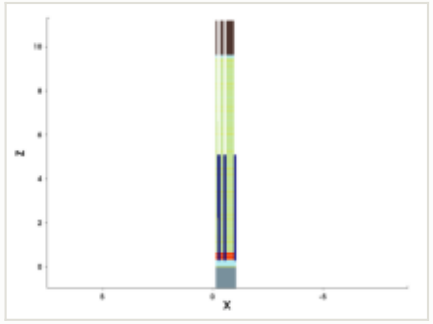

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

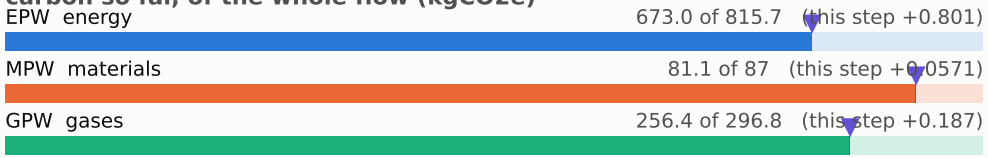

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

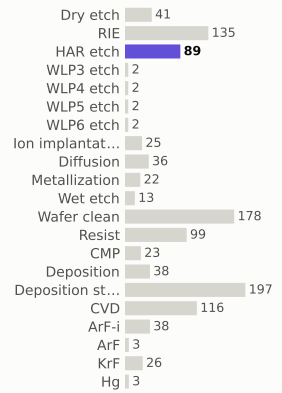

materials deposited (g)

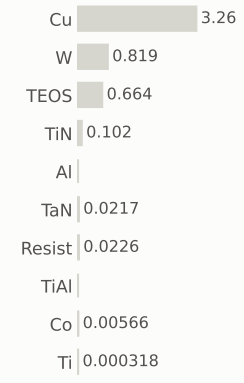

gases emitted (g)

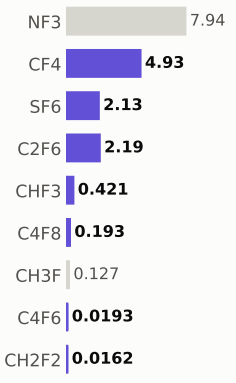

Step #19668.0612: HAR_etch

etch_noop · HAR_etch

1.04	1,011.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

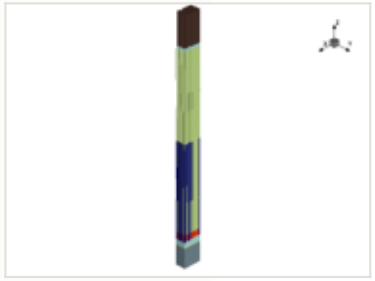

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

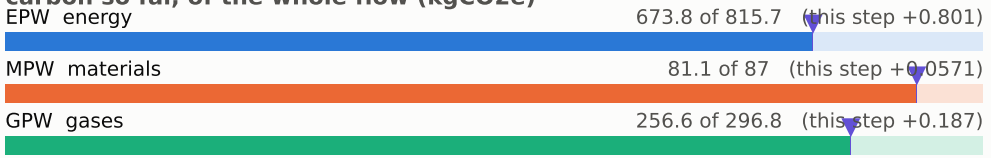

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

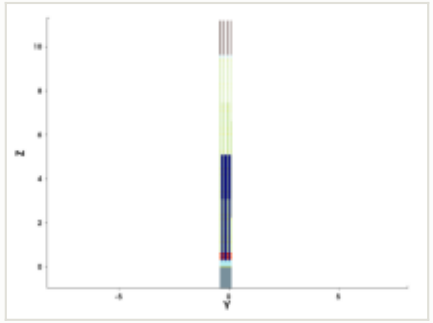

y cut at -0.150 µm

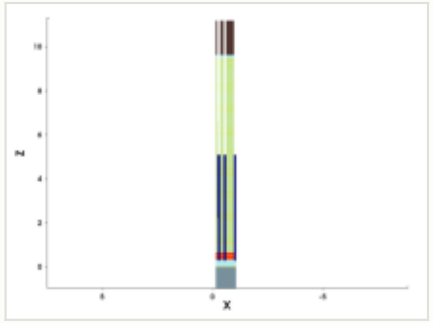

mask for this step

no mask for this step

steps by process area

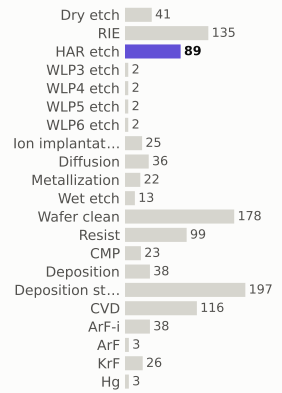

materials deposited (g)

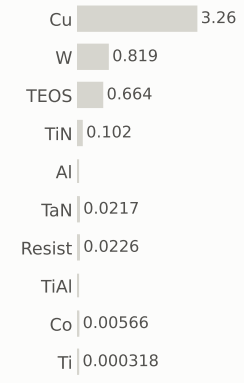

gases emitted (g)

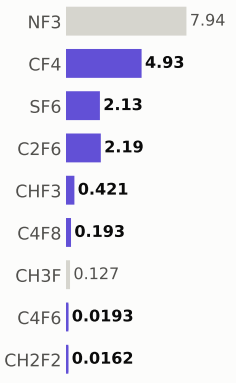

Step #19668.1633: HAR_etch

etch_noop · HAR_etch

1.04	1,012.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

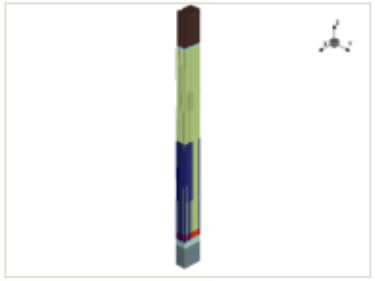

x cut at -0.570 µm

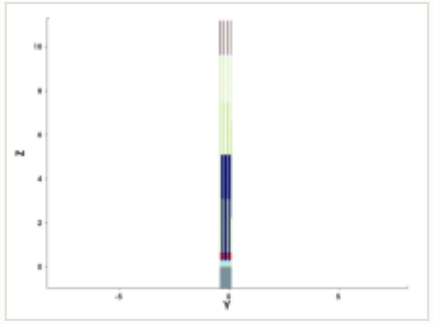

y cut at -0.150 µm

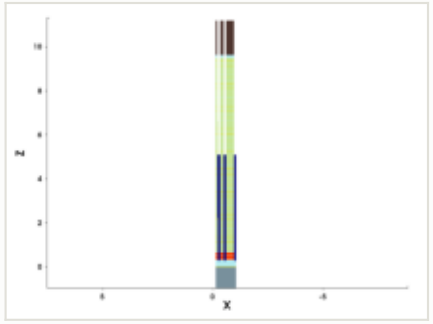

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

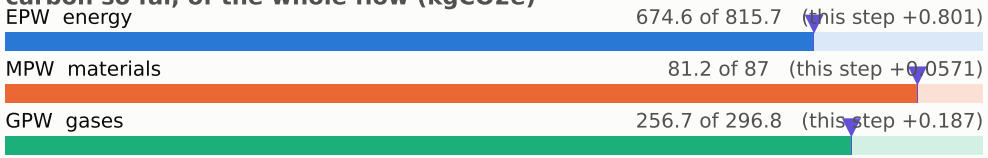

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

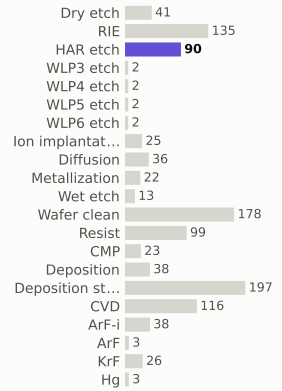

materials deposited (g)

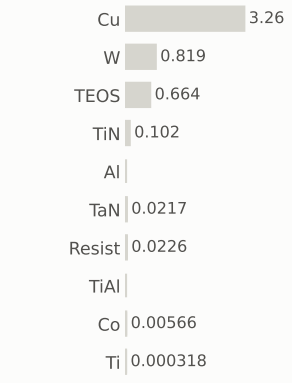

gases emitted (g)

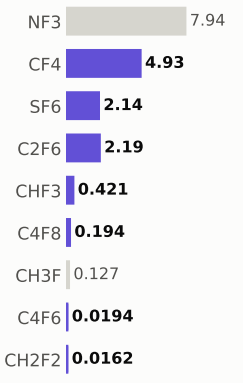

Step #19668.2653: HAR_etch

etch_noop · HAR_etch

1.04	1,013.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

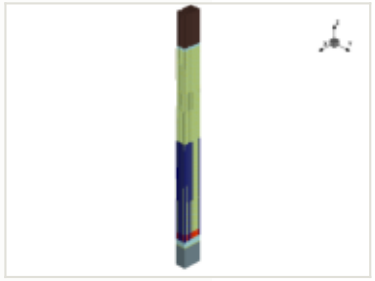

x cut at -0.570 µm

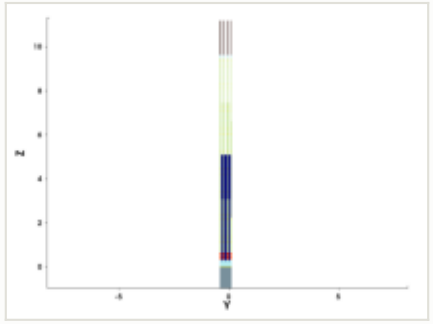

y cut at -0.150 µm

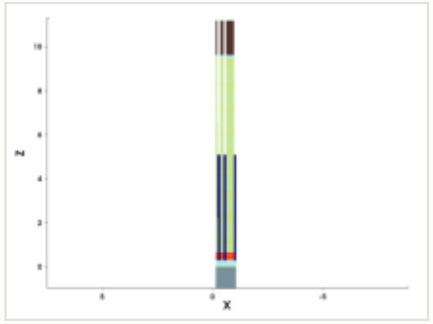

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

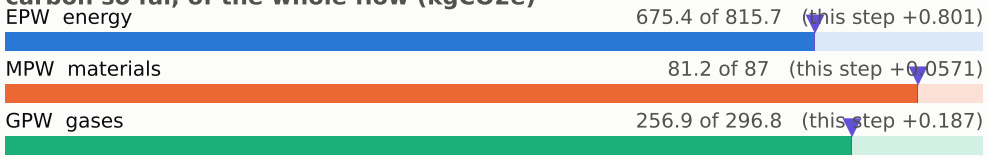

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

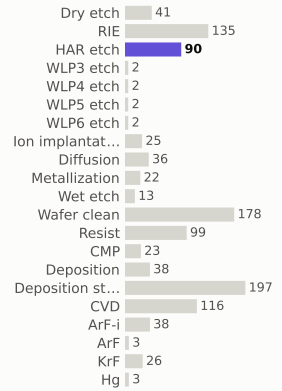

materials deposited (g)

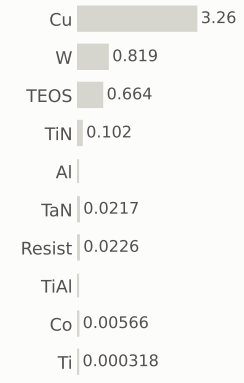

gases emitted (g)

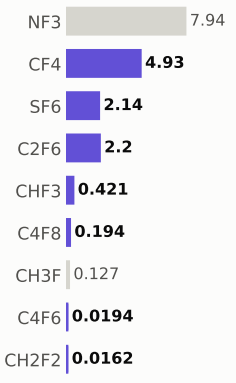

Step #19668.367299999998: HAR_etch

etch_noop · HAR_etch

1.04	1,014.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

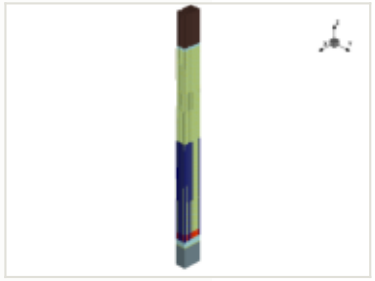

x cut at -0.570 µm

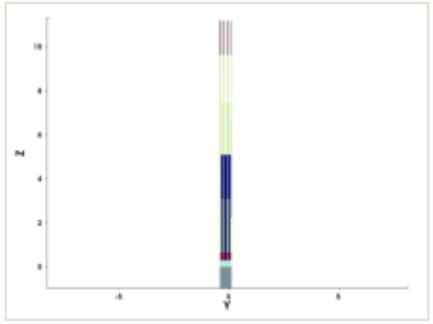

y cut at -0.150 µm

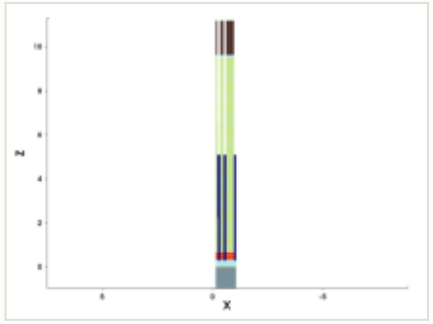

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

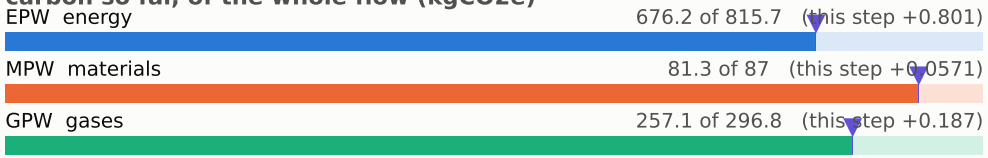

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

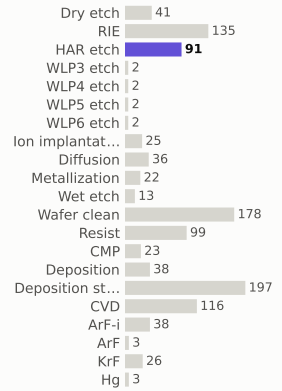

materials deposited (g)

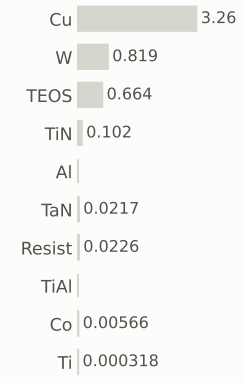

gases emitted (g)

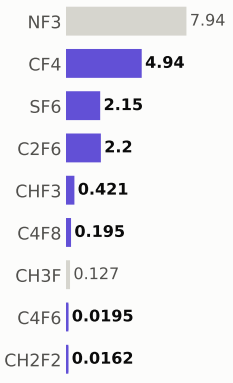

Step #19668.4694: HAR_etch

etch_noop · HAR_etch

1.04	1,015.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

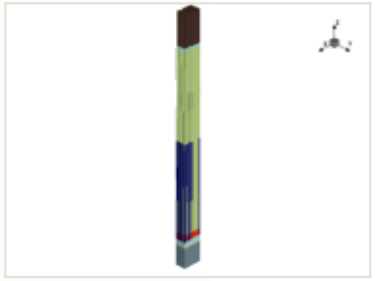

x cut at -0.570 µm

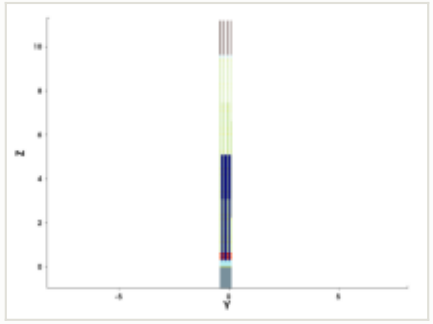

y cut at -0.150 µm

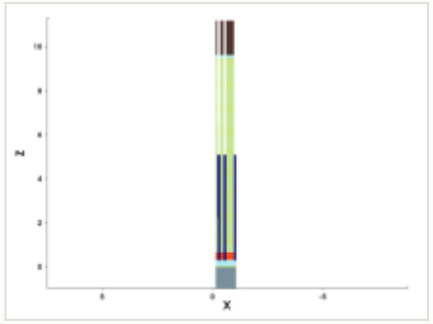

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

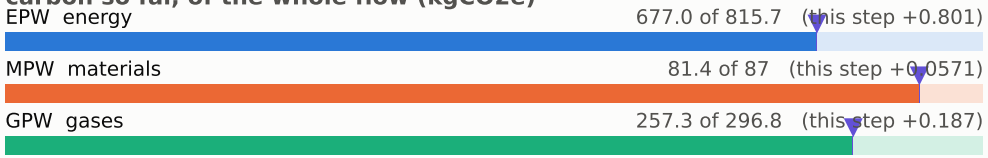

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

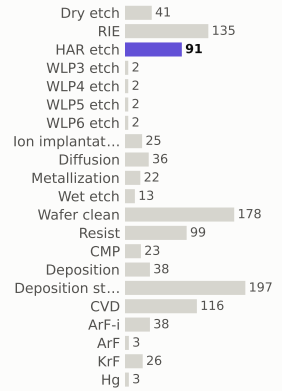

materials deposited (g)

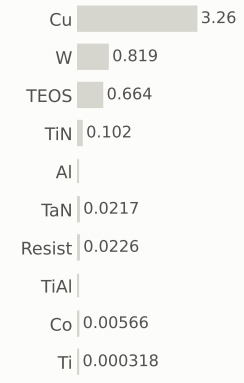

gases emitted (g)

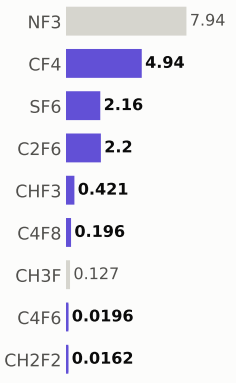

Step #19668.5714: HAR_etch

etch_noop · HAR_etch

1.04	1,016.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

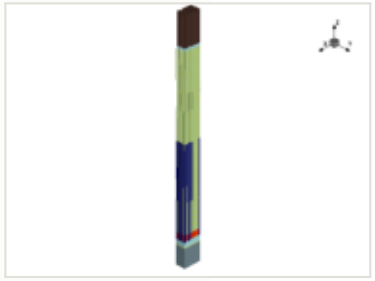

x cut at -0.570 µm

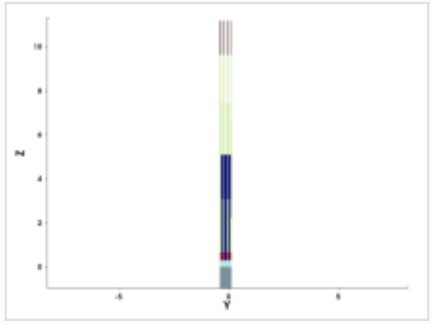

y cut at -0.150 µm

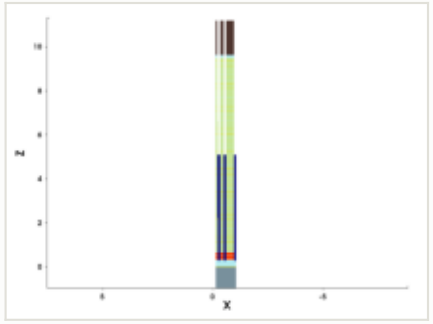

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

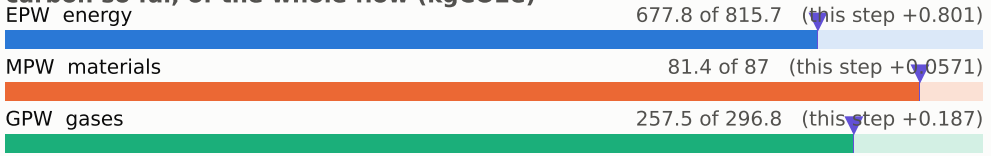

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

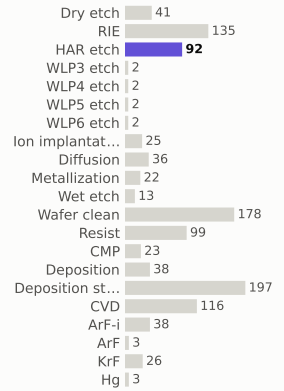

materials deposited (g)

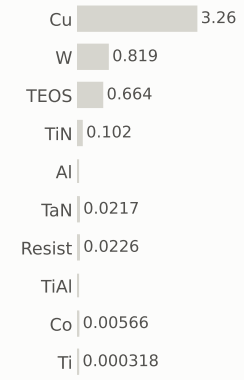

gases emitted (g)

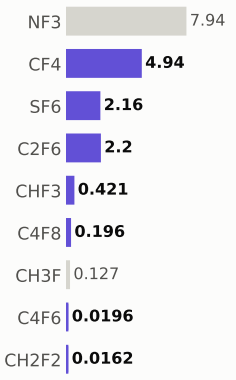

Step #19668.6735: HAR_etch

etch_noop · HAR_etch

1.04	1,017.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

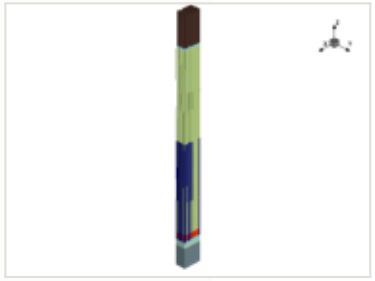

x cut at -0.570 µm

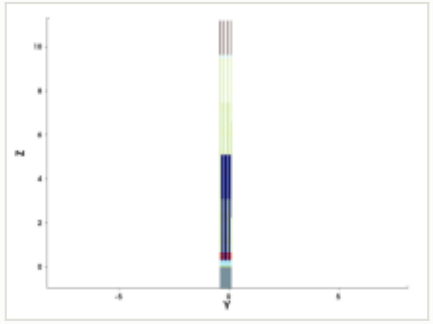

y cut at -0.150 µm

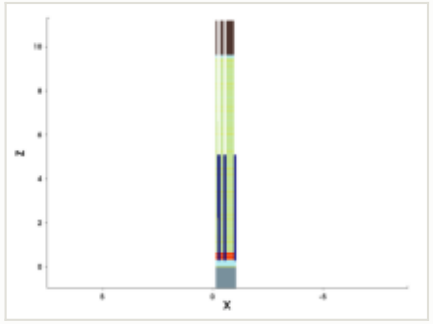

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

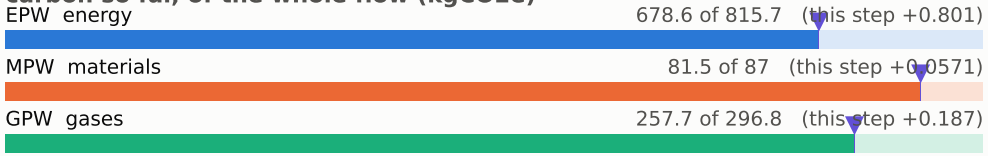

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

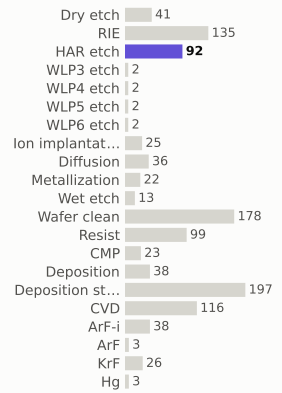

materials deposited (g)

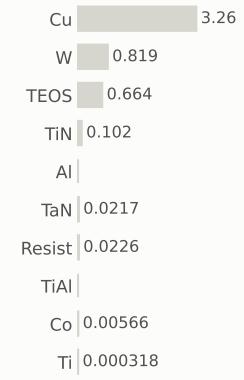

gases emitted (g)

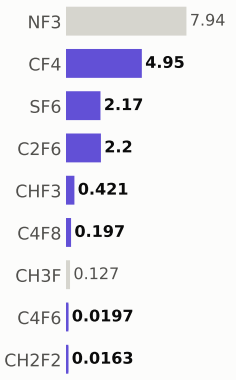

Step #19668.7755: HAR_etch

etch_noop · HAR_etch

1.04	1,018.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

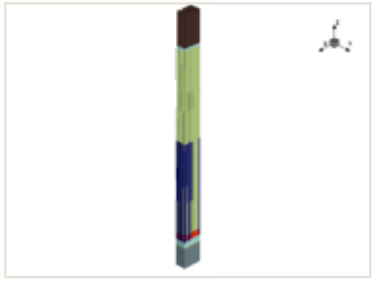

x cut at -0.570 µm

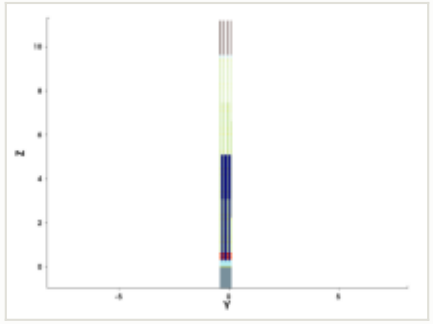

y cut at -0.150 µm

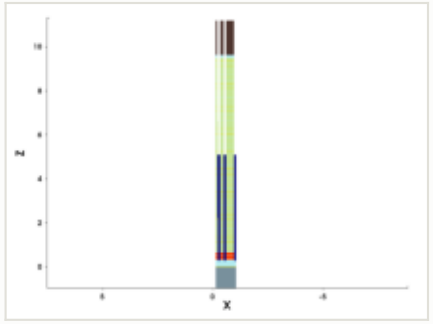

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

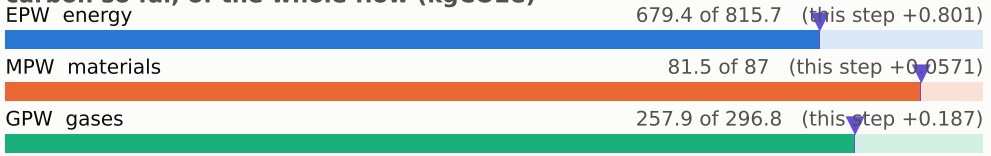

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

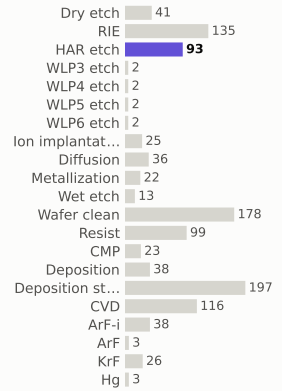

materials deposited (g)

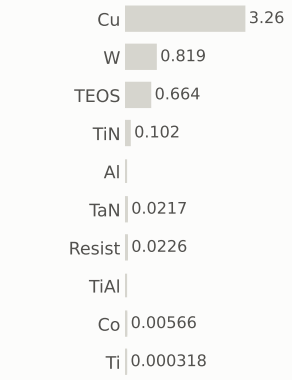

gases emitted (g)

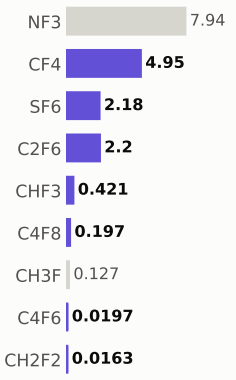

Step #19668.8776: HAR_etch

etch_noop · HAR_etch

1.04	1,019.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

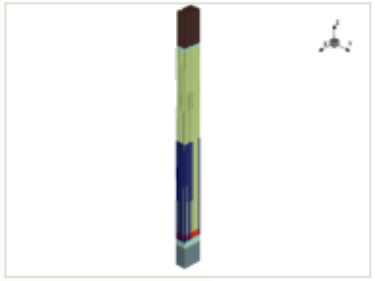

x cut at -0.570 µm

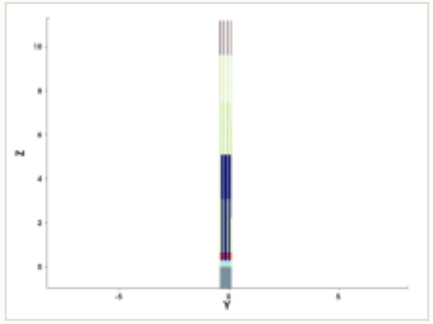

y cut at -0.150 µm

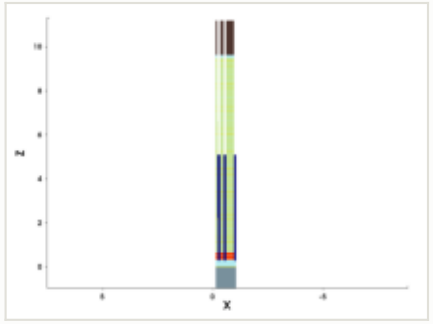

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

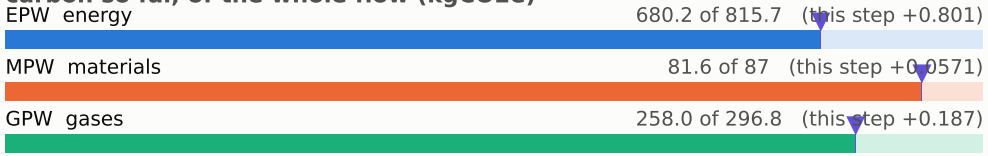

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

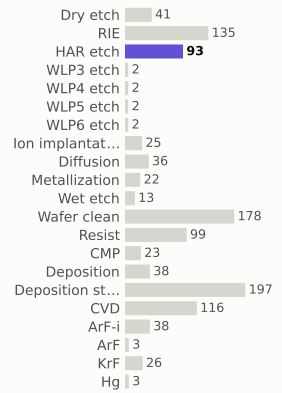

materials deposited (g)

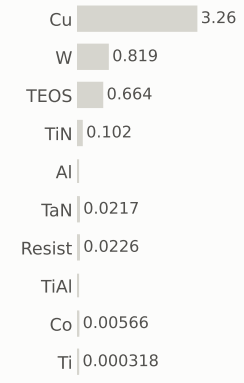

gases emitted (g)

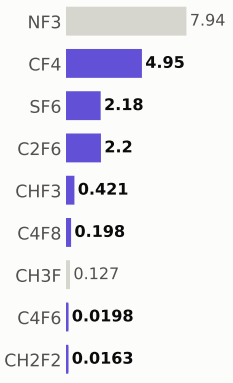

Step #19668.9796: HAR_etch

etch_noop · HAR_etch

1.04	1,020.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

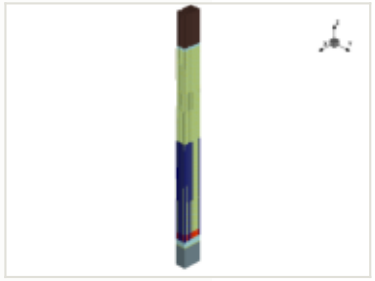

x cut at -0.570 µm

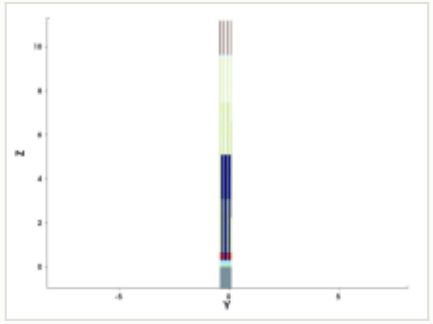

y cut at -0.150 µm

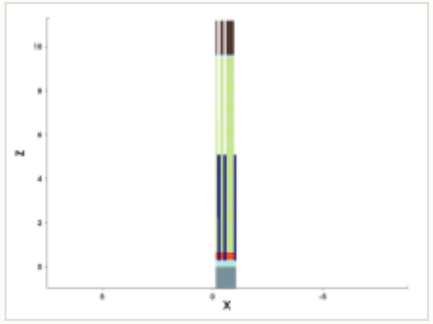

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

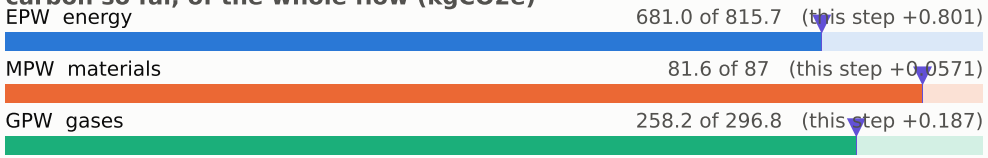

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

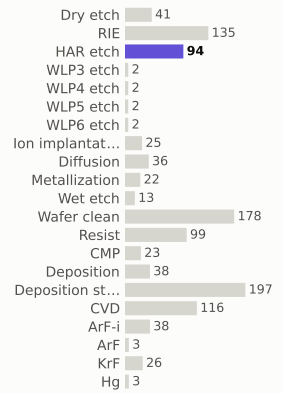

materials deposited (g)

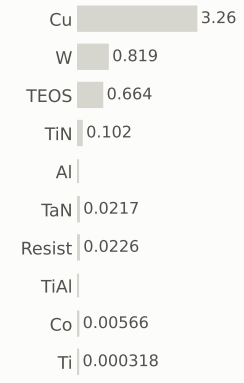

gases emitted (g)

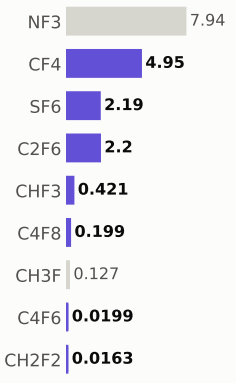

Step #19669.081599999998: HAR_etch

etch_noop · HAR_etch

1.04	1,021.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

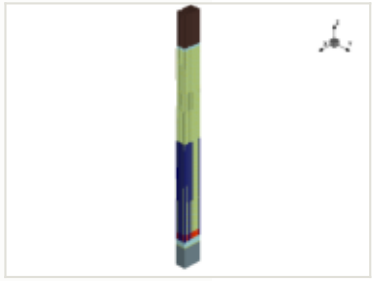

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

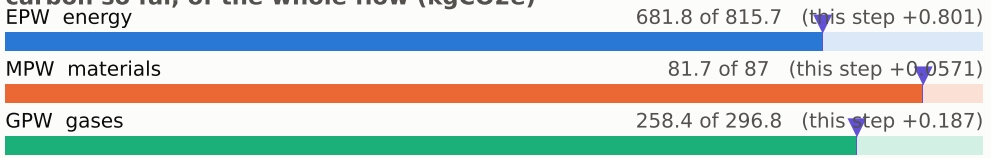

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

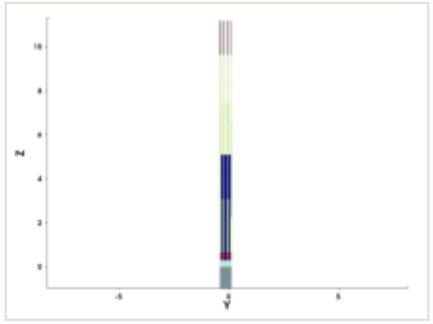

y cut at -0.150 µm

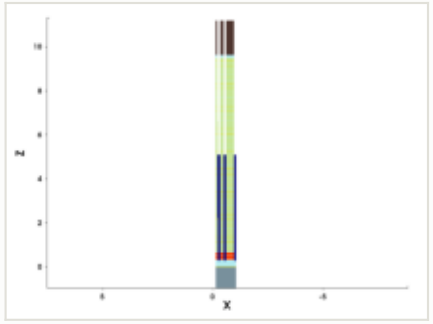

mask for this step

no mask for this step

steps by process area

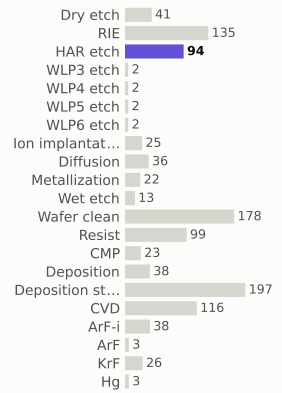

materials deposited (g)

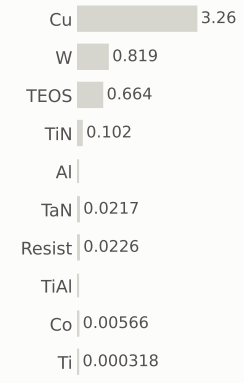

gases emitted (g)

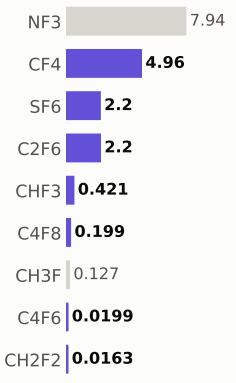

Step #19669.1837: HAR_etch

etch_noop · HAR_etch

1.04	1,022.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

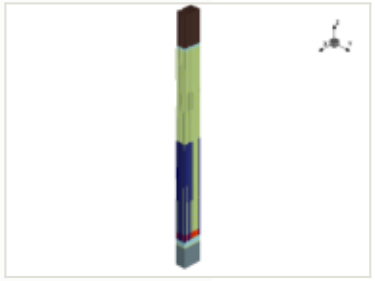

x cut at -0.570 µm

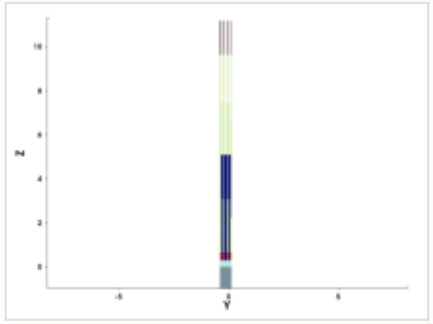

y cut at -0.150 µm

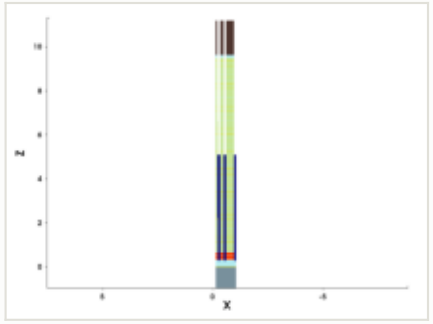

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

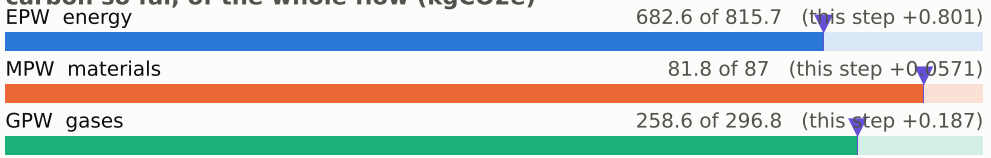

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

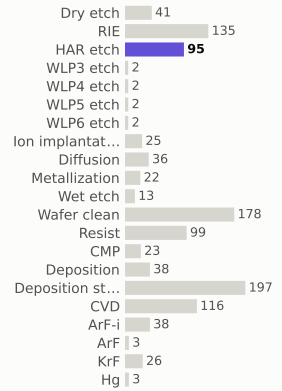

materials deposited (g)

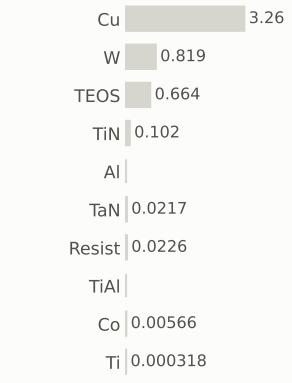

gases emitted (g)

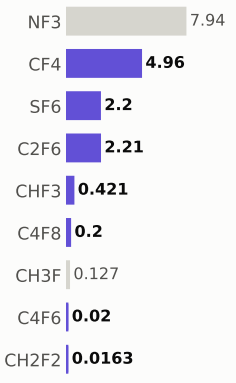

Step #19669.2857: HAR_etch

etch_noop · HAR_etch

1.04	1,024.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

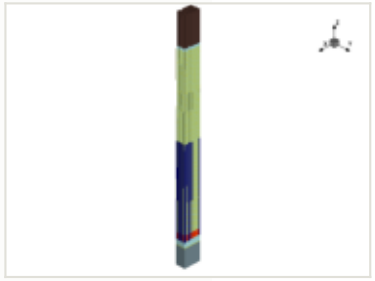

x cut at -0.570 µm

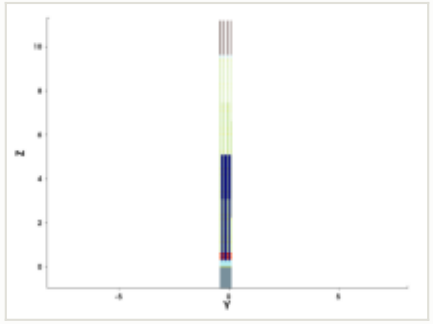

y cut at -0.150 µm

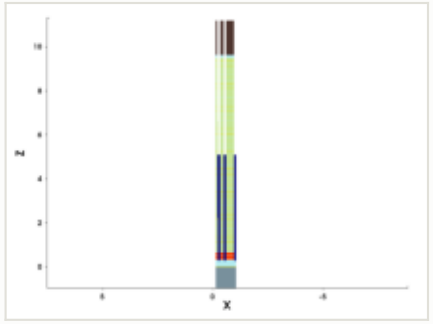

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

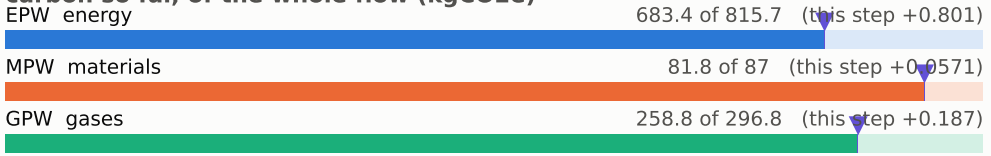

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

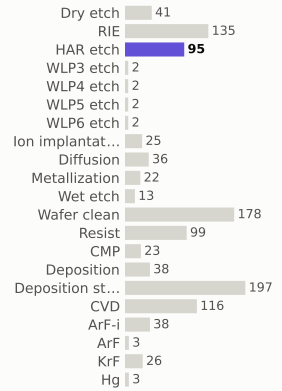

materials deposited (g)

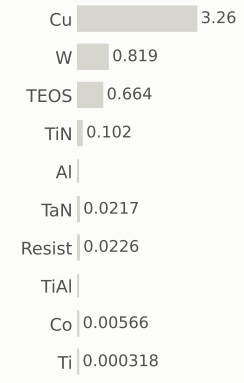

gases emitted (g)

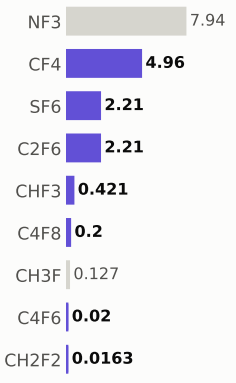

Step #19669.3878: HAR_etch

etch_noop · HAR_etch

1.04	1,025.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

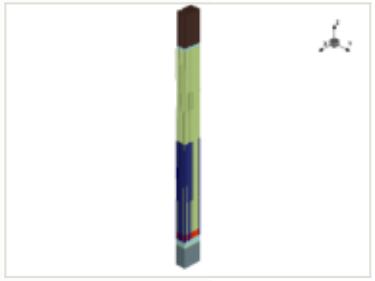

x cut at -0.570 µm

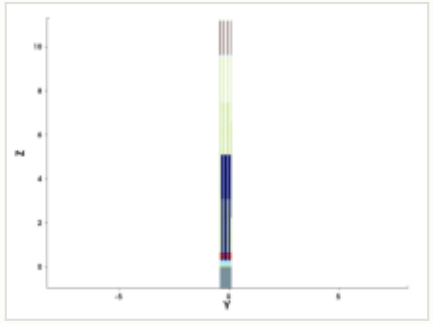

y cut at -0.150 µm

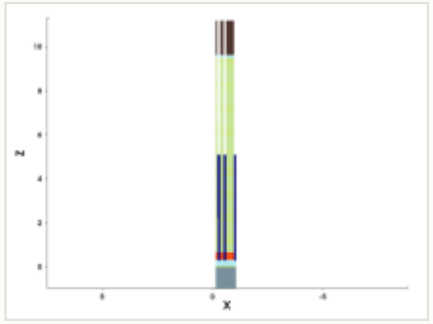

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

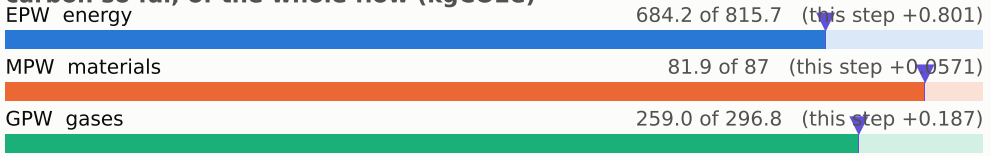

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

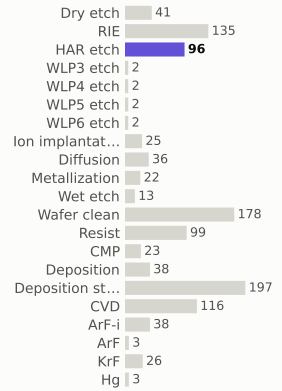

materials deposited (g)

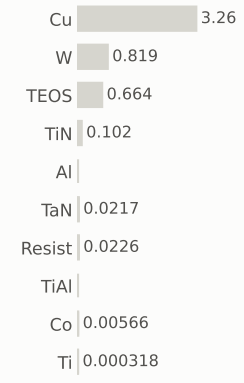

gases emitted (g)

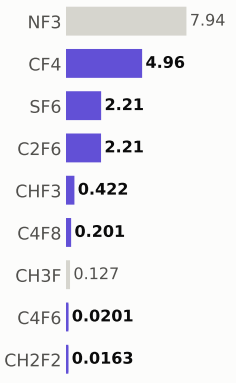

Step #19669.4898: HAR_etch

etch_noop · HAR_etch

1.04	1,026.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

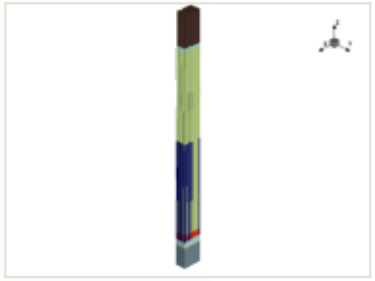

x cut at -0.570 µm

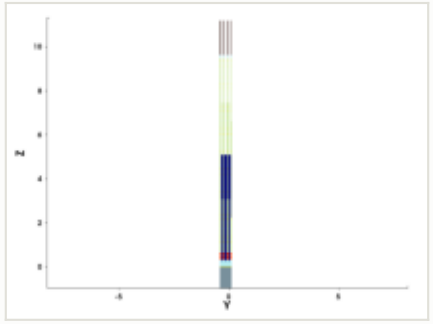

y cut at -0.150 µm

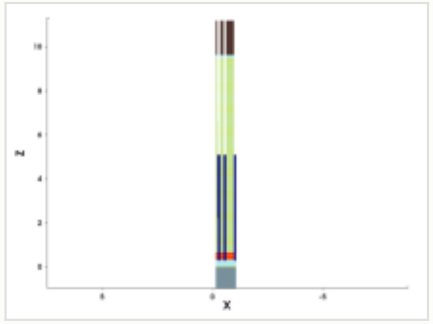

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

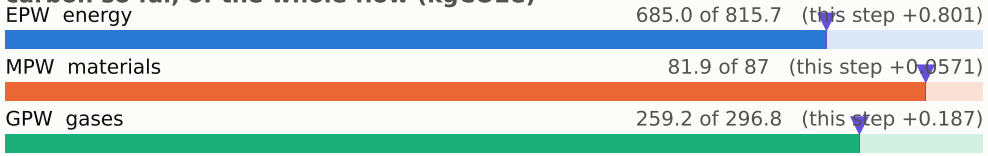

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

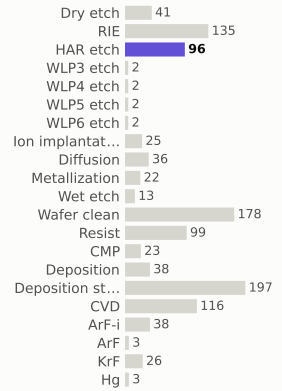

materials deposited (g)

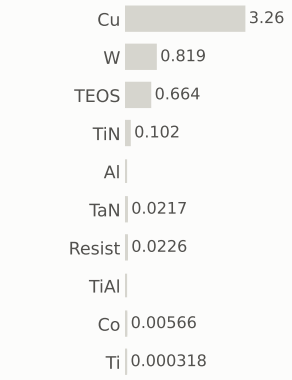

gases emitted (g)

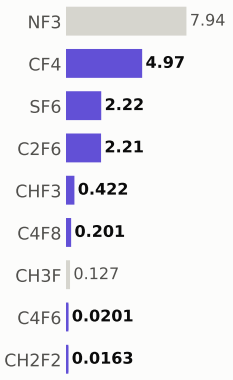

Step #19669.591800000002: HAR_etch

etch_noop · HAR_etch

1.04	1,027.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

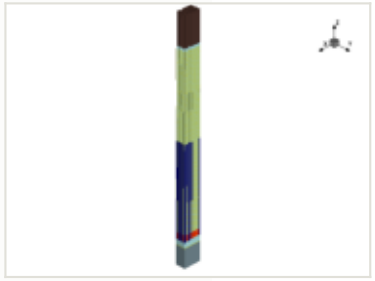

x cut at -0.570 µm

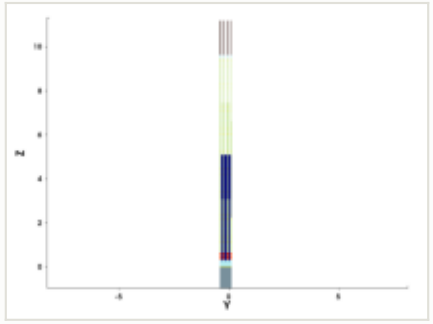

y cut at -0.150 µm

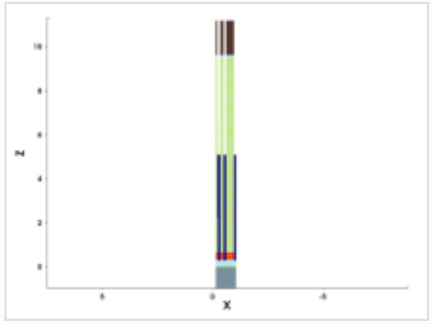

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

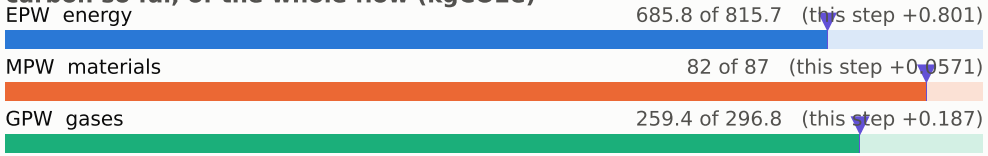

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

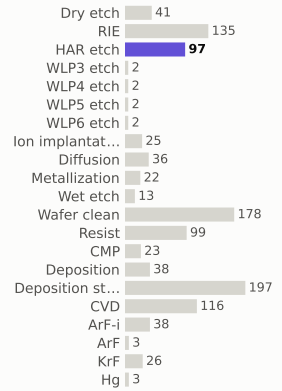

materials deposited (g)

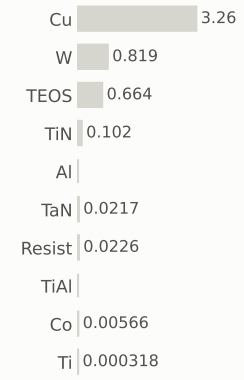

gases emitted (g)

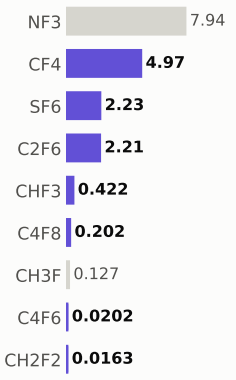

Step #19669.6939: HAR_etch

etch_noop · HAR_etch

1.04	1,028.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

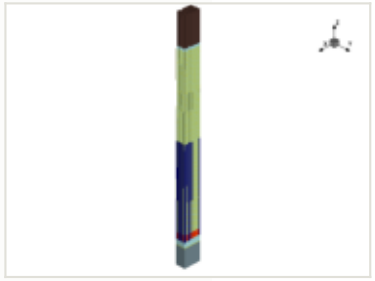

x cut at -0.570 µm

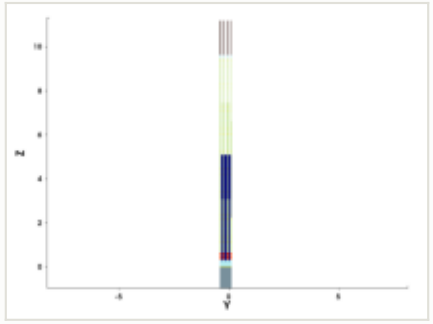

y cut at -0.150 µm

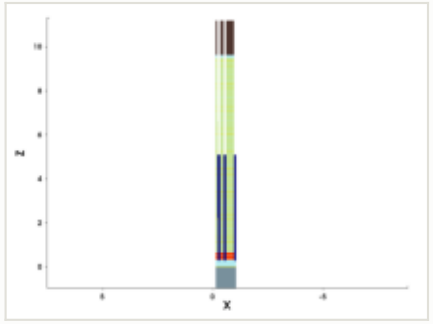

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

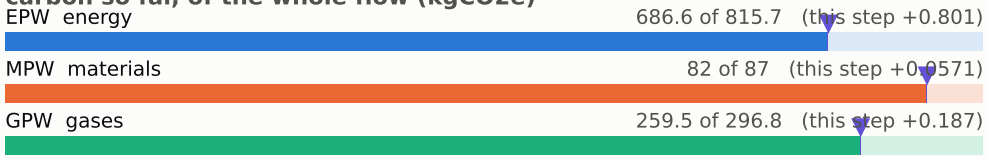

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

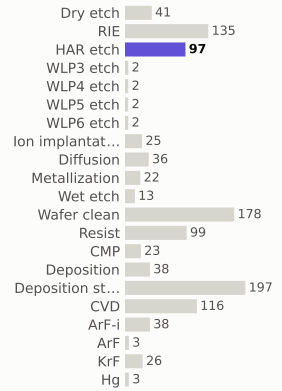

materials deposited (g)

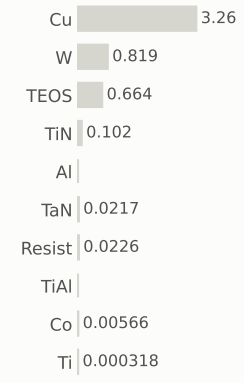

gases emitted (g)

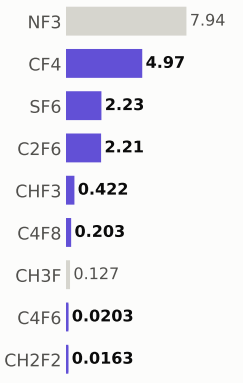

Step #19669.795899999997: HAR_etch

etch_noop · HAR_etch

1.04	1,029.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

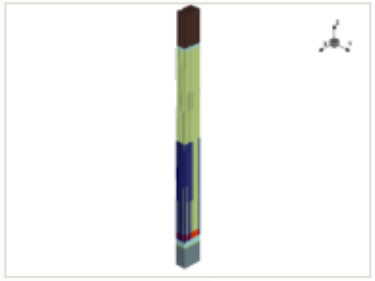

x cut at -0.570 µm

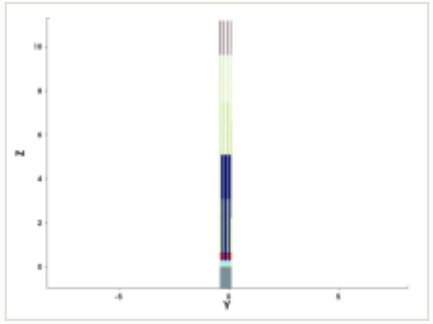

y cut at -0.150 µm

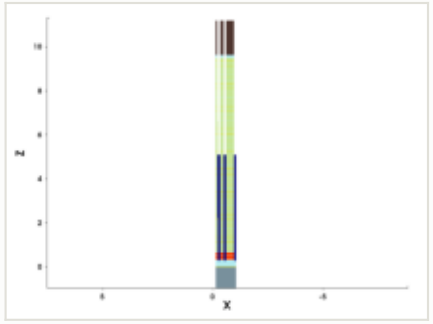

mask for this step

no mask for this step

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

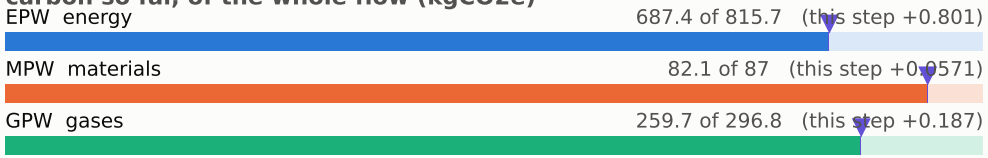

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

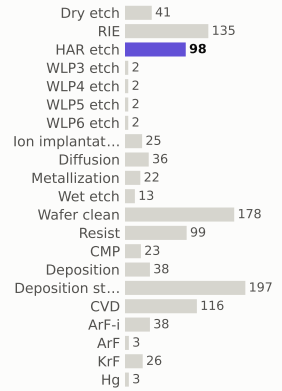

materials deposited (g)

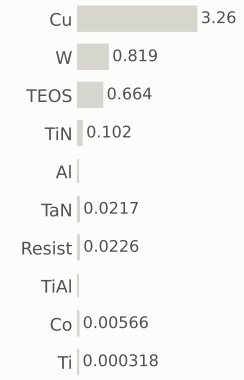

gases emitted (g)

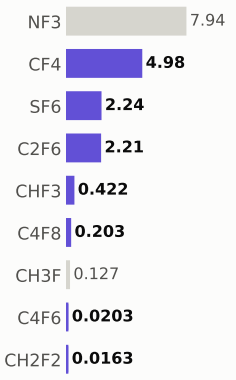

Step #19669.898: HAR_etch

etch_noop · HAR_etch

1.04	1,030.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

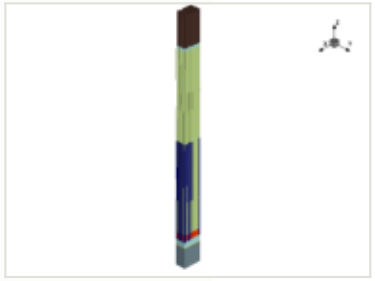

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

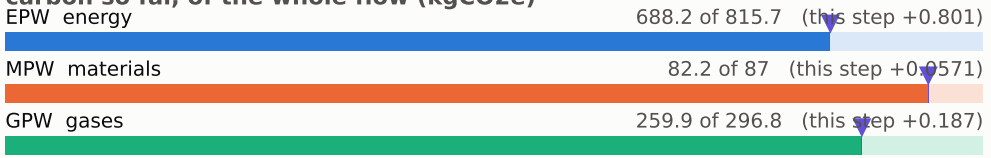

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

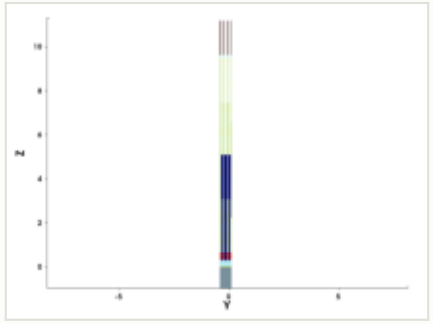

y cut at -0.150 µm

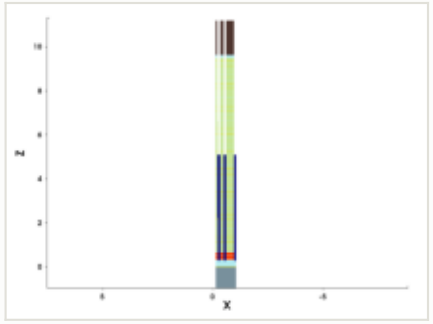

mask for this step

no mask for this step

steps by process area

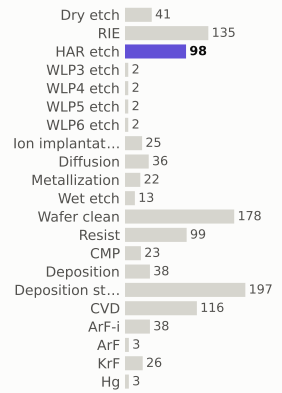

materials deposited (g)

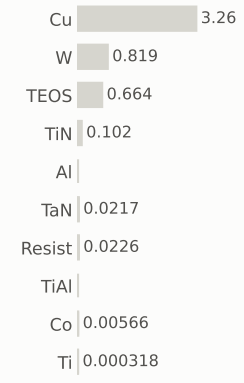

gases emitted (g)

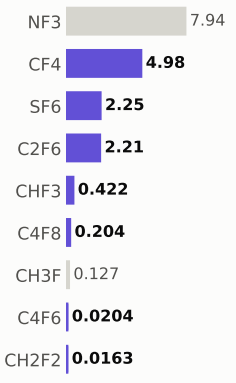

Step #19670: Dry_etch

etch_strip · Dry_etch

0.801	1,031.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

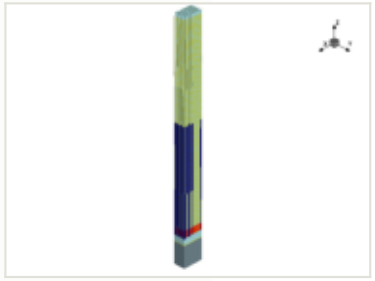

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

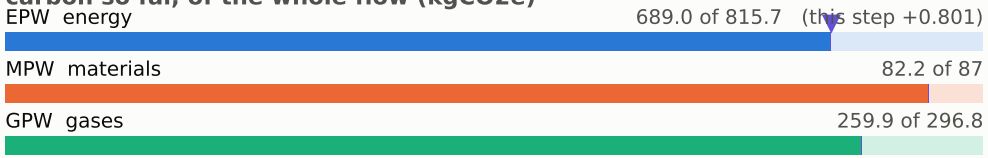

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

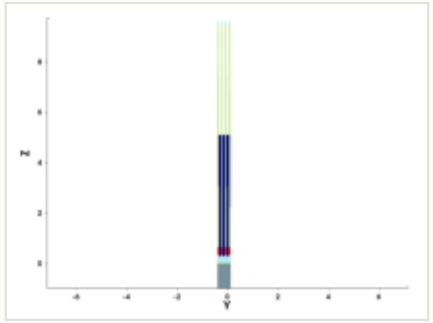

y cut at -0.150 µm

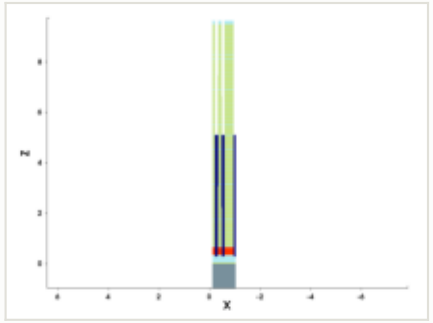

mask for this step

no mask for this step

steps by process area

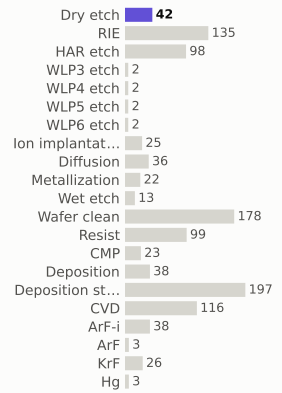

materials deposited (g)

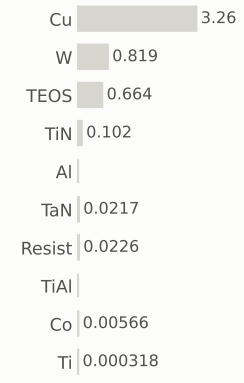

gases emitted (g)

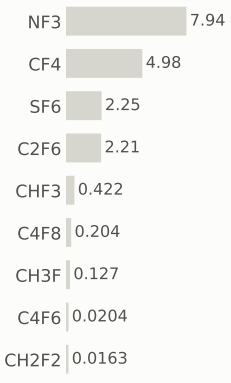

Step #19680: Wafer_clean

clean · Wafer_clean

0.169	1,031.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

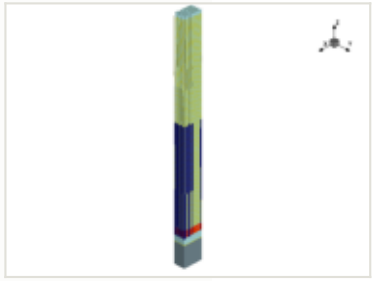

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

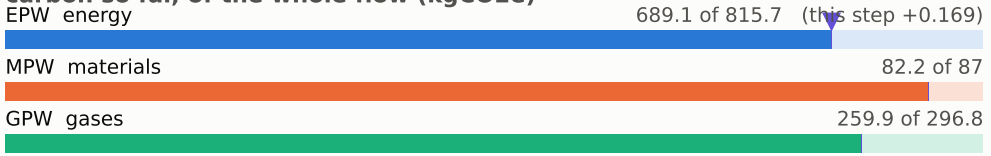

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

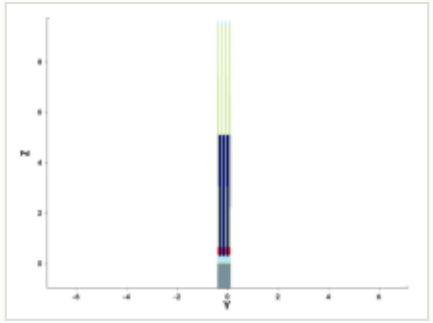

y cut at -0.150 µm

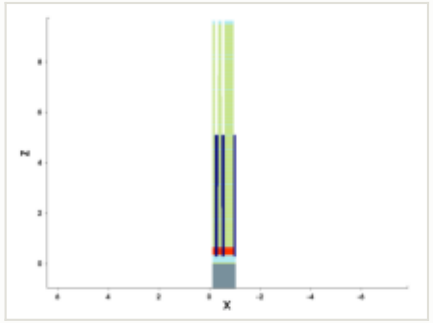

mask for this step

no mask for this step

steps by process area

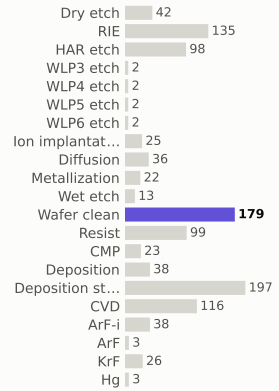

materials deposited (g)

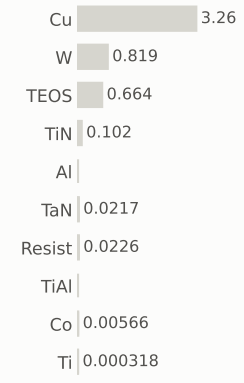

gases emitted (g)

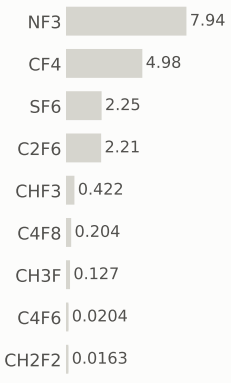

Step #19690: Wet_etch

etch_isotropic · Wet_etch

0.169	1,031.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

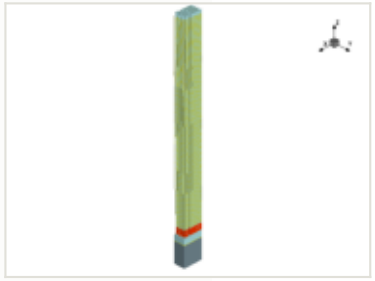

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

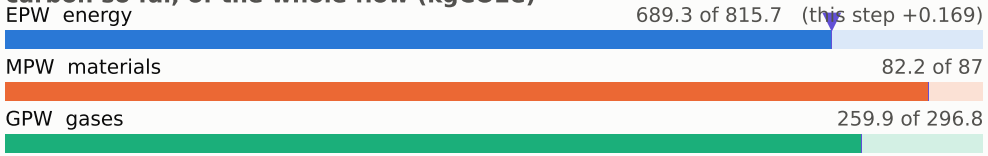

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

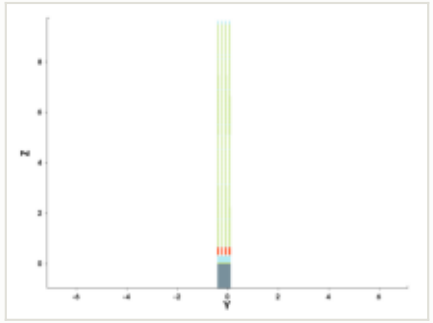

y cut at -0.150 µm

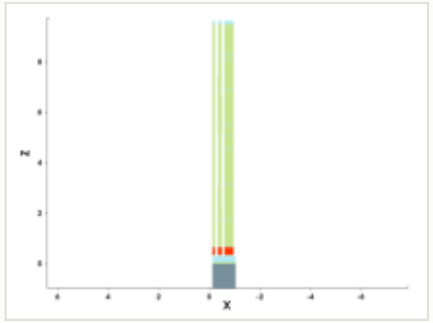

mask for this step

no mask for this step

steps by process area

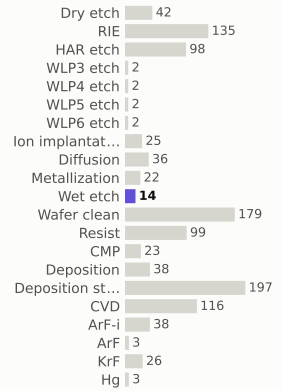

materials deposited (g)

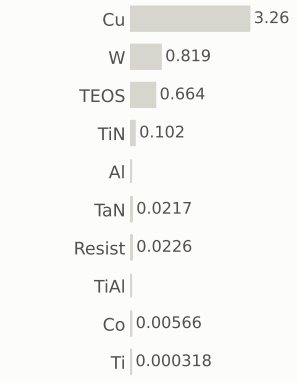

gases emitted (g)

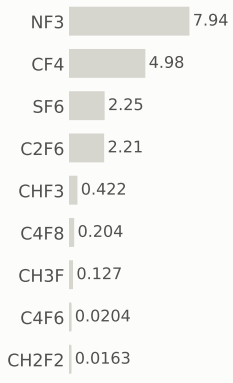

Step #19700: Wafer_clean

clean · Wafer_clean

0.169	1,031.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

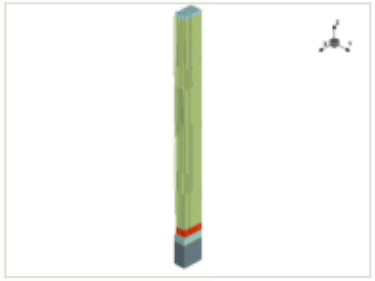

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

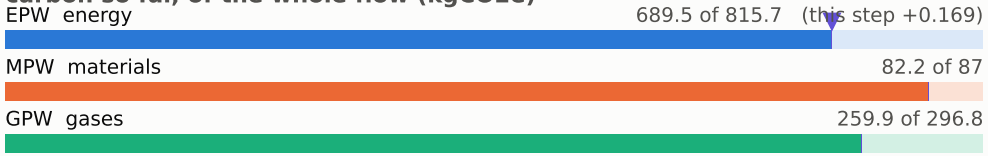

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

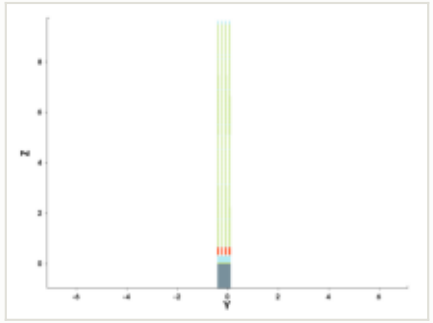

y cut at -0.150 µm

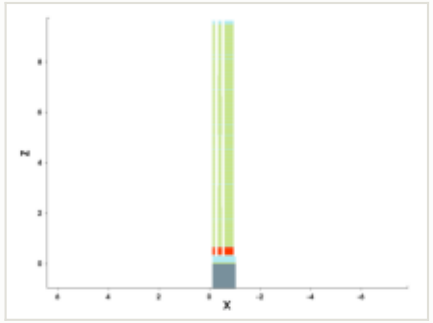

mask for this step

no mask for this step

steps by process area

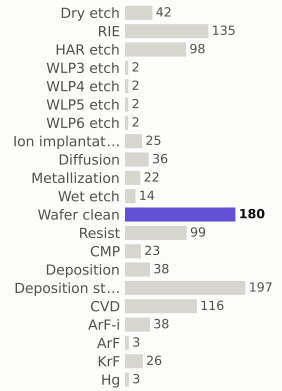

materials deposited (g)

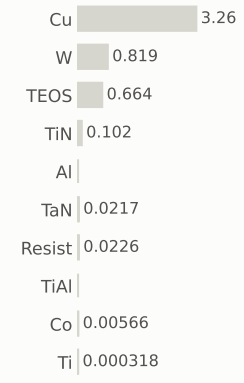

gases emitted (g)

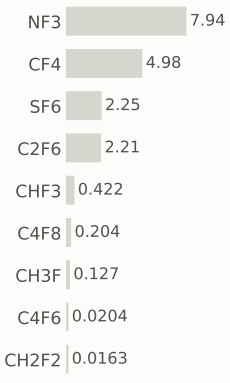

Step #19710: CVD

depo_isotropic · CVD

1.31	1,032.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.008 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

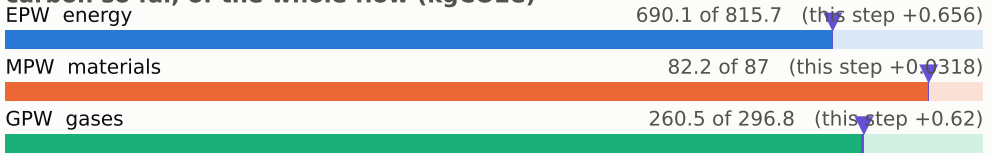

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

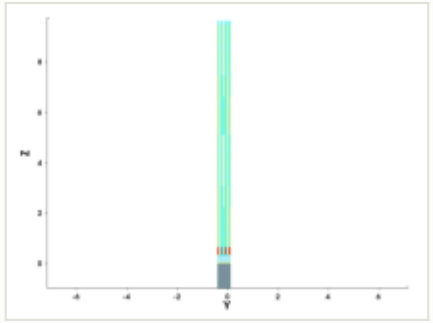

y cut at -0.150 µm

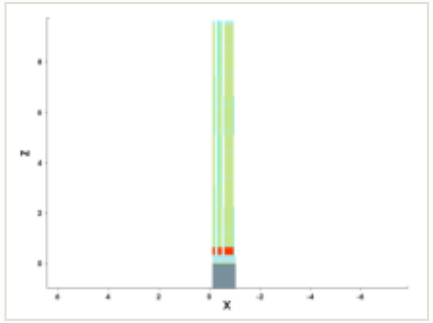

mask for this step

no mask for this step

steps by process area

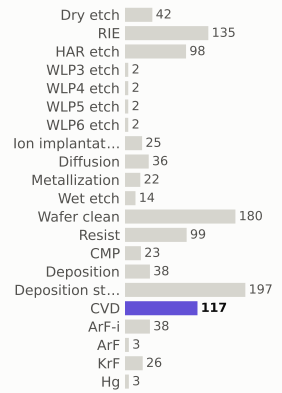

materials deposited (g)

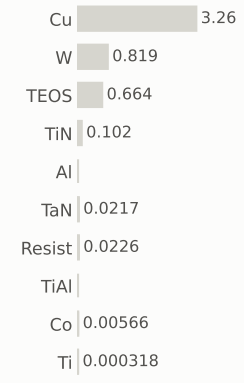

gases emitted (g)

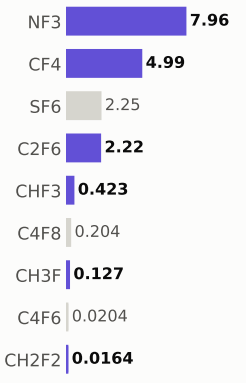

Step #19720: CVD

depo_isotropic · CVD

1.31	1,034.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

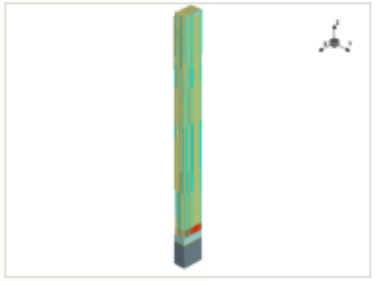

x cut at -0.570 µm

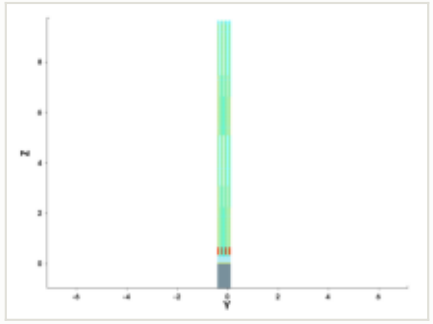

y cut at -0.150 µm

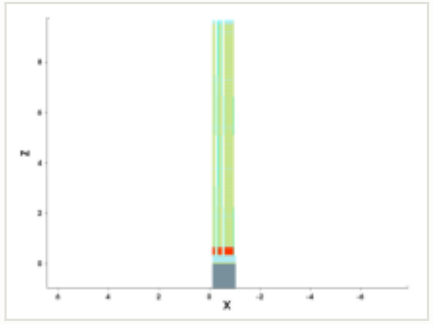

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

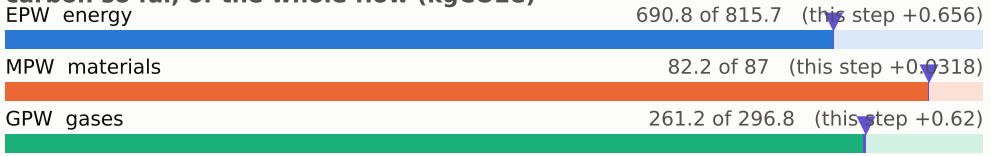

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

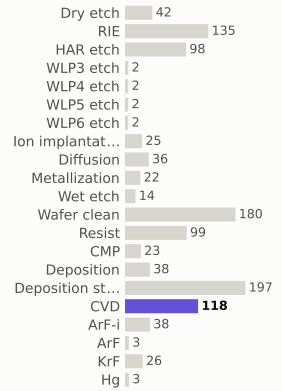

materials deposited (g)

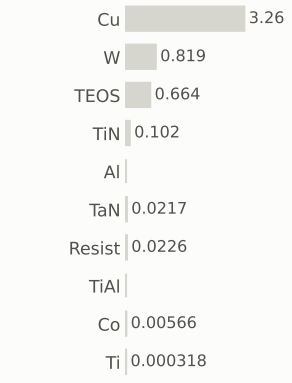

gases emitted (g)

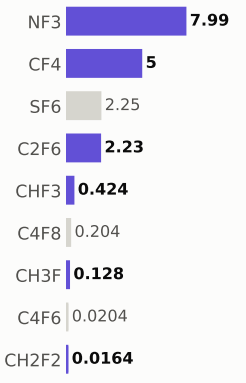

Step #19730: CVD

depo_isotropic · CVD

1.31	1,035.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

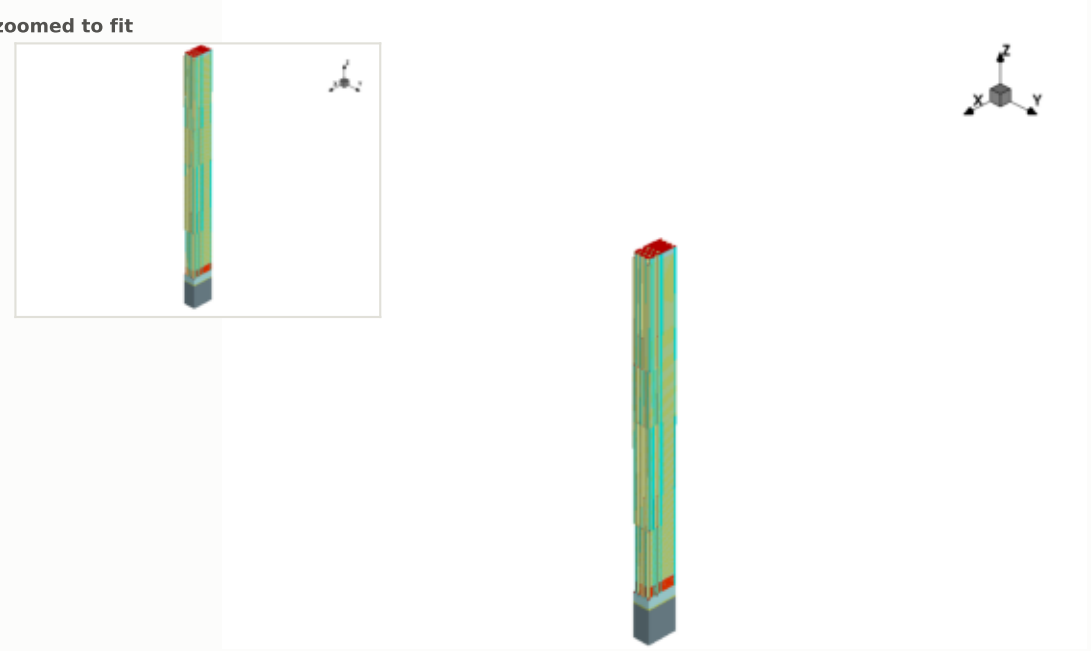

this step

process area	CVD	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.004 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0.0318 kgCO2e (gas 0.0318)
input gases	NF3 2.54 g	GPW	0.62 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

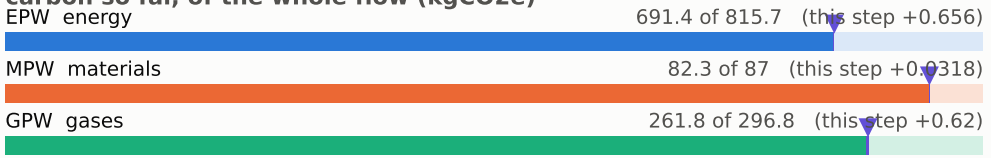

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

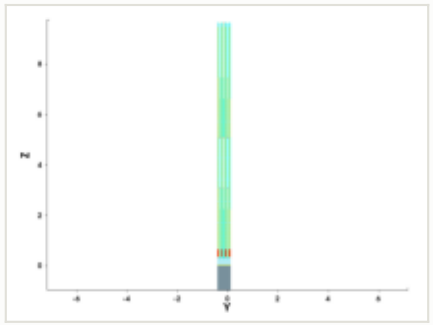

y cut at -0.150 µm

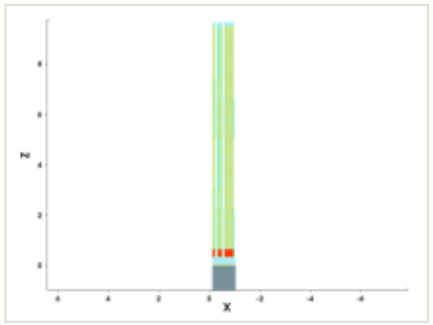

mask for this step

no mask for this step

steps by process area

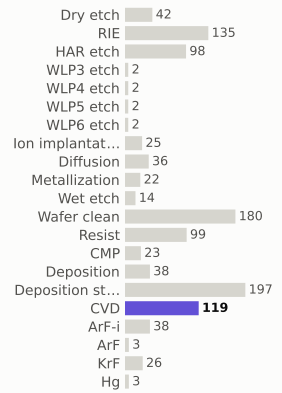

materials deposited (g)

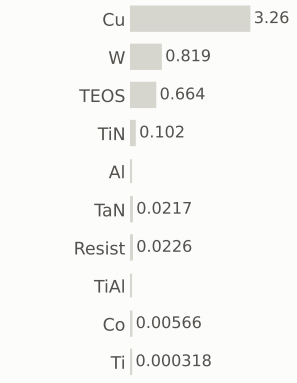

gases emitted (g)

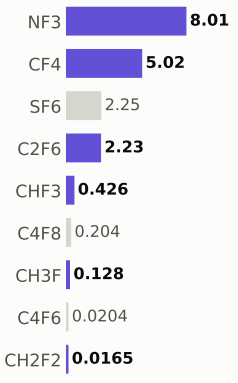

Step #19740: CVD

depo_isotropic · CVD

1.31	1,036.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

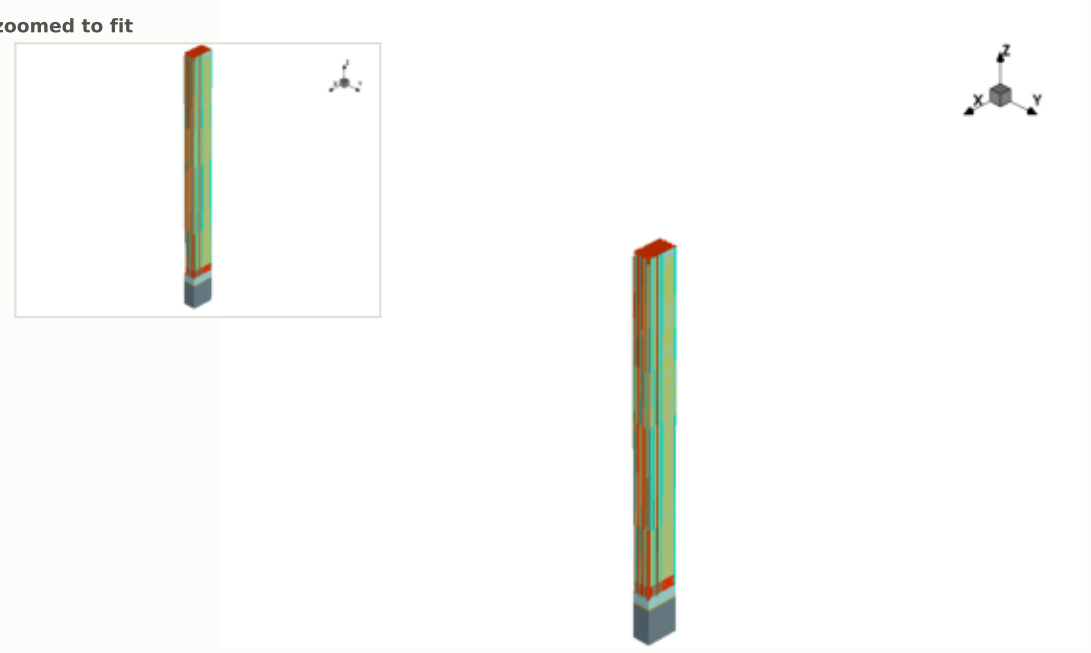

this step

process area	CVD
material	—
thickness	0.008 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

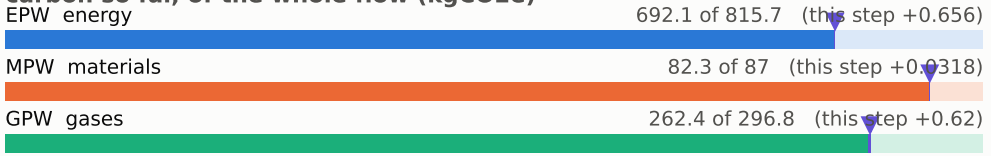

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

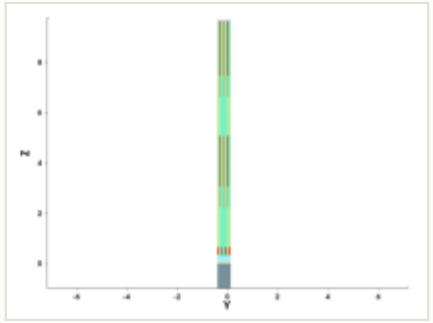

y cut at -0.150 µm

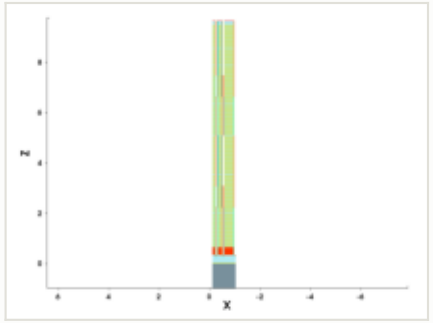

mask for this step

no mask for this step

steps by process area

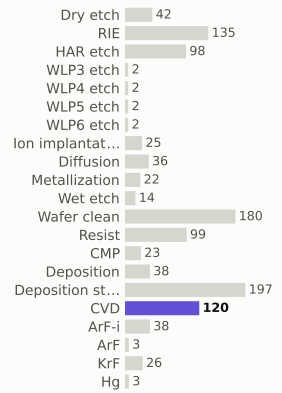

materials deposited (g)

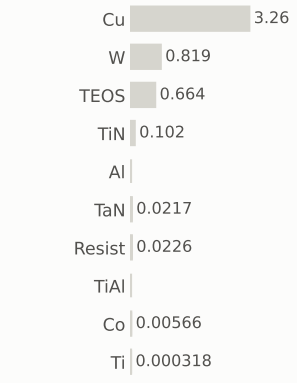

gases emitted (g)

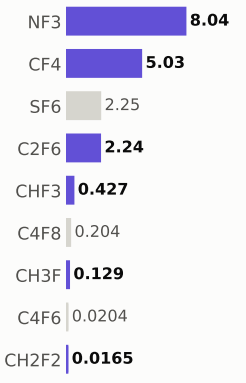

Step #19750: CVD

depo_isotropic · CVD

1.31	1,038.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

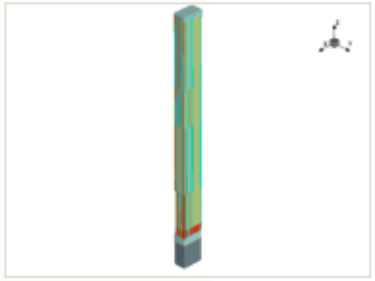

x cut at -0.570 µm

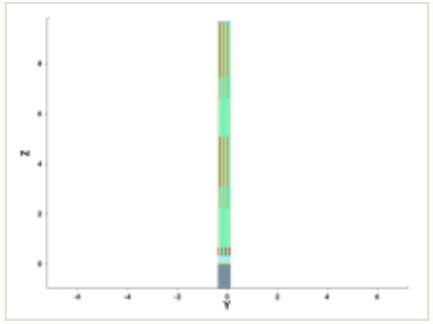

y cut at -0.150 µm

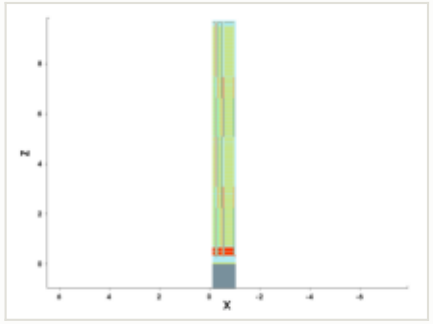

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.07 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

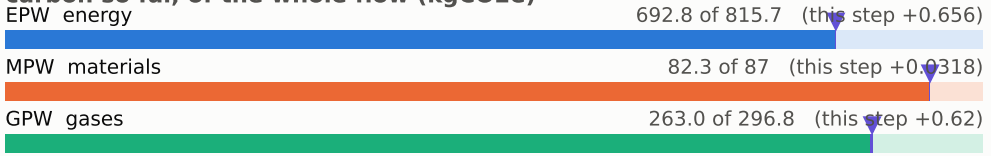

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

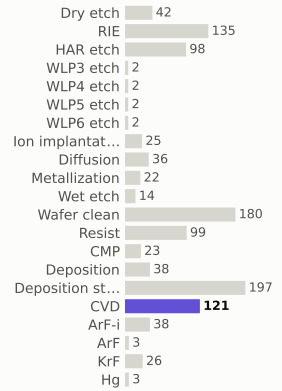

materials deposited (g)

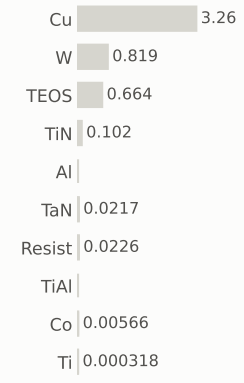

gases emitted (g)

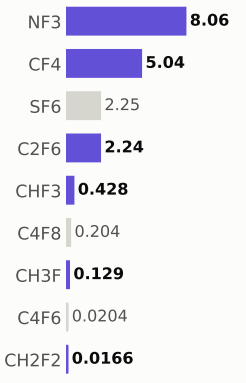

Step #19760: CMP

etch_cmp · CMP

0.169	1,038.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

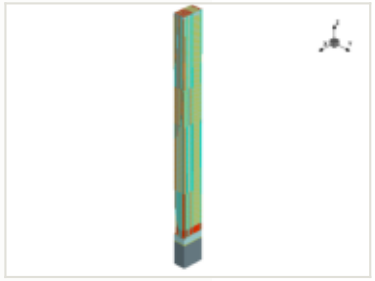

x cut at -0.570 µm

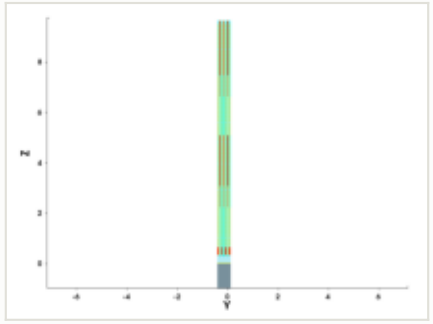

y cut at -0.150 µm

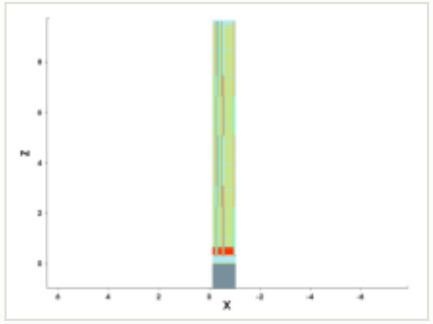

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

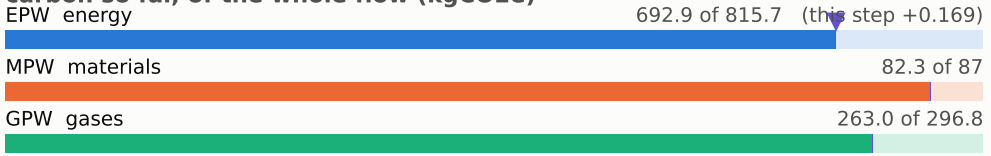

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

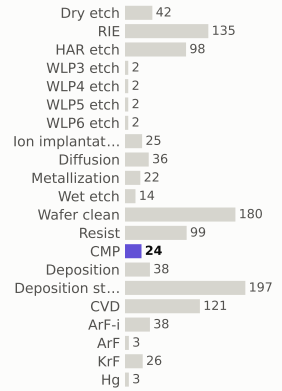

materials deposited (g)

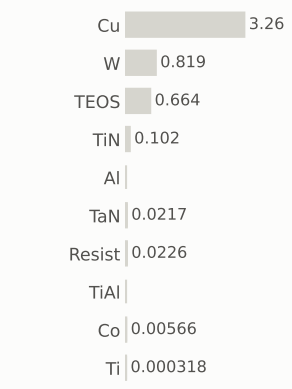

gases emitted (g)



Step #19770: Wafer_clean

clean · Wafer_clean

0.169	1,038.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

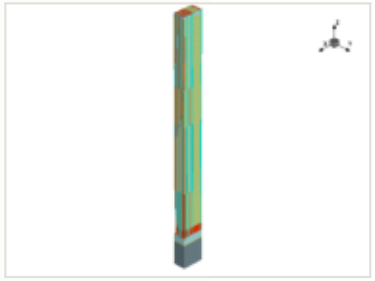

x cut at -0.570 µm

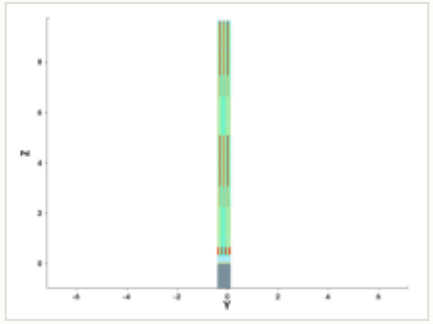

y cut at -0.150 µm

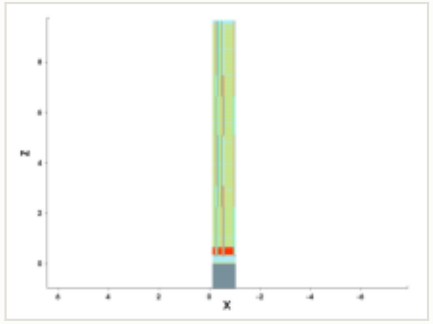

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

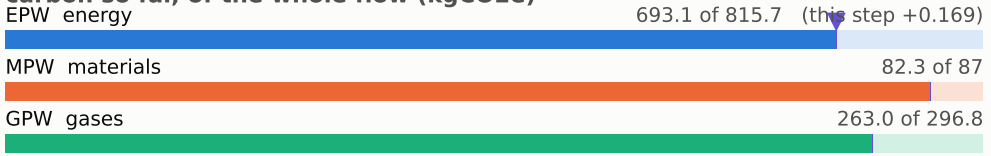

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

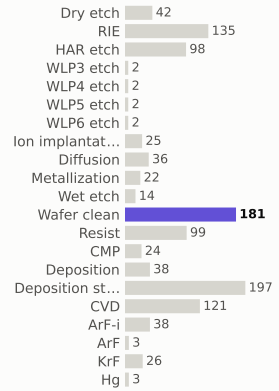

materials deposited (g)

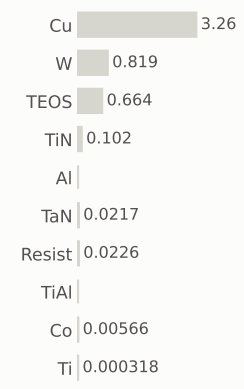

gases emitted (g)



Step #19780: RIE

etch_anisotropic · RIE

1.04	1,039.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

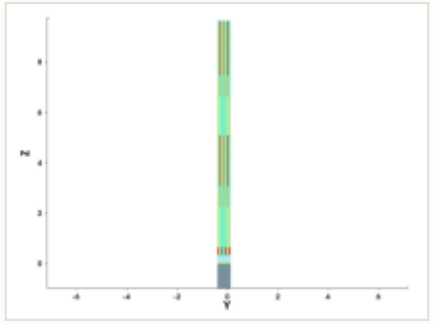

y cut at -0.150 µm

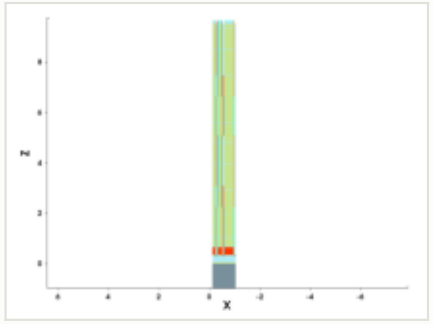

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

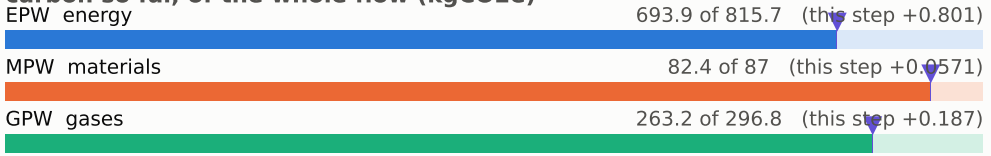

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

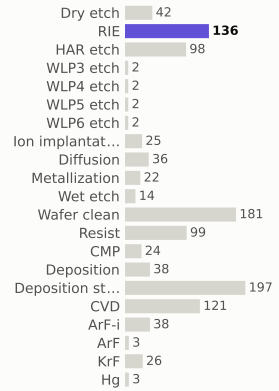

materials deposited (g)

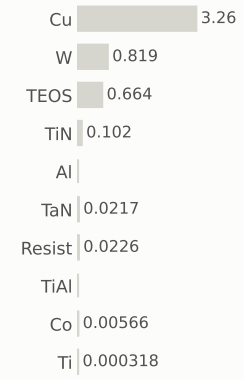

gases emitted (g)

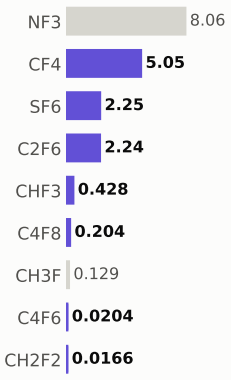

Step #19790: Wafer_clean

clean · Wafer_clean

0.169	1,039.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

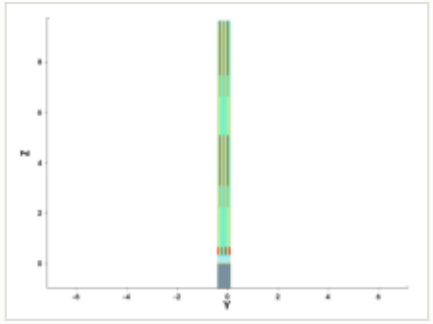

y cut at -0.150 µm

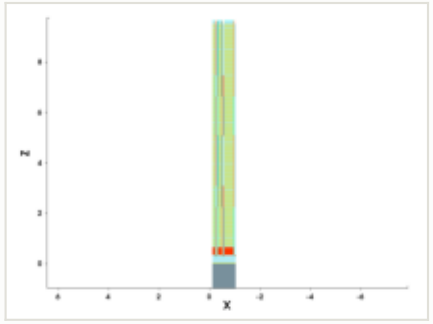

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

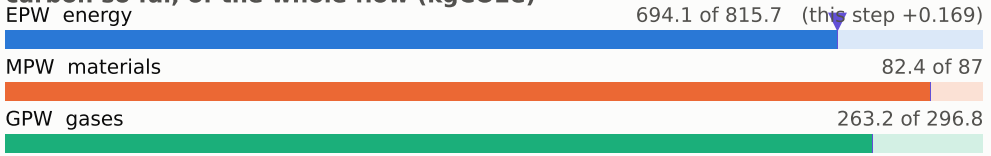

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

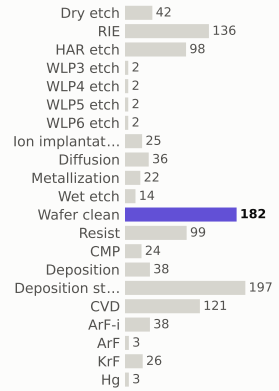

materials deposited (g)

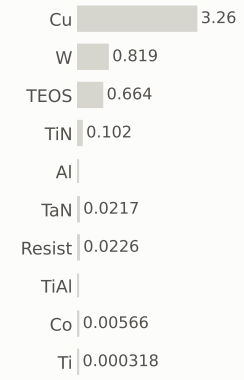

gases emitted (g)

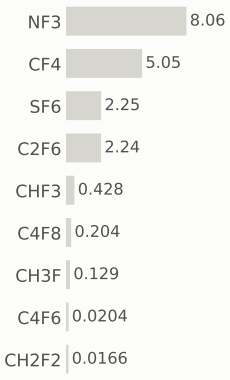

Step #19800: CVD

depo_isotropic · CVD

1.31	1,041.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

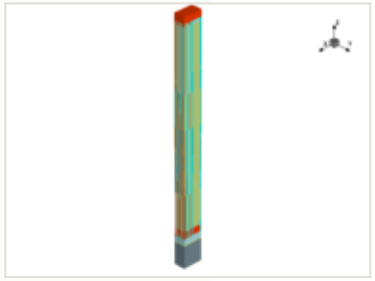

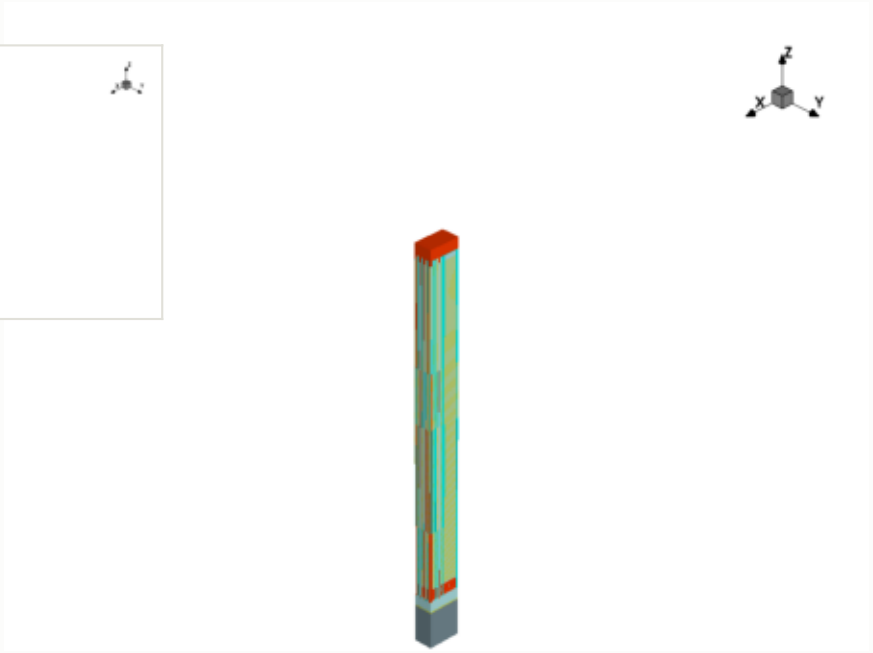

x cut at -0.570 µm

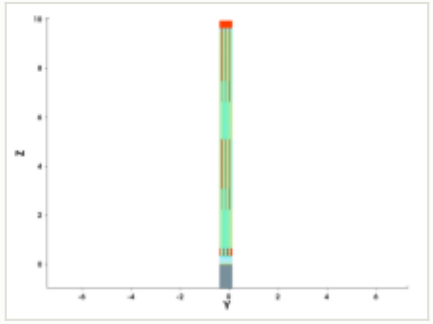

y cut at -0.150 µm

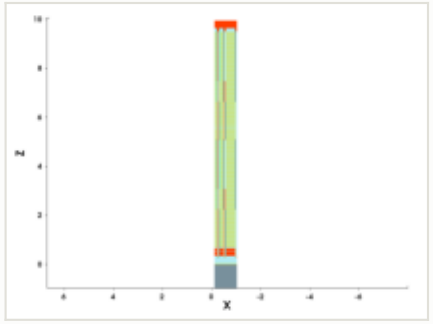

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

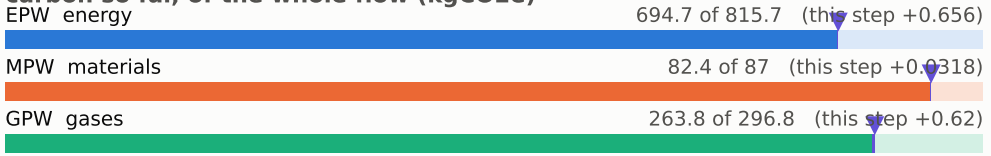

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

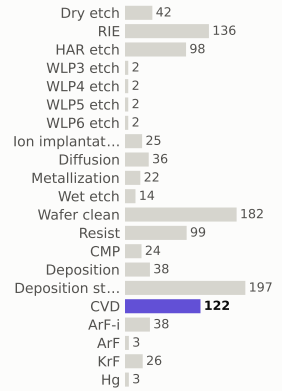

materials deposited (g)

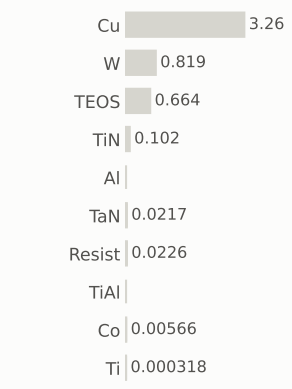

gases emitted (g)

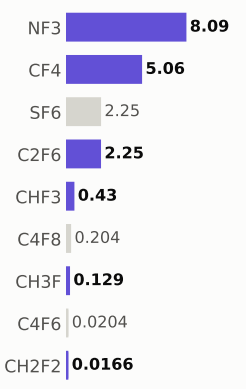

Step #19810: CMP

etch_cmp · CMP

0.169	1,041.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

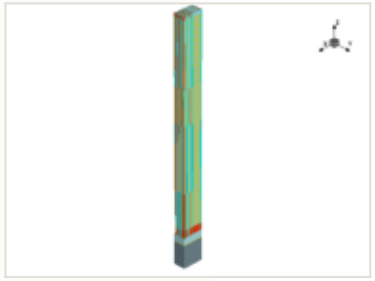

x cut at -0.570 µm

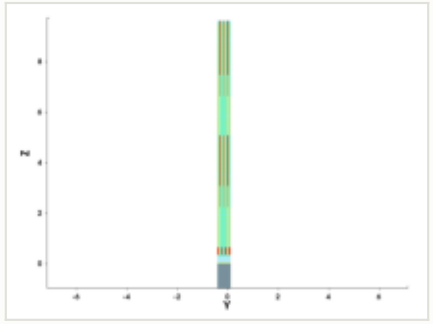

y cut at -0.150 µm

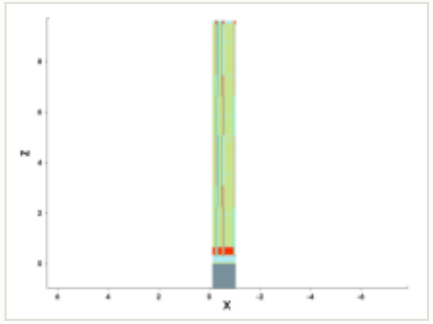

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

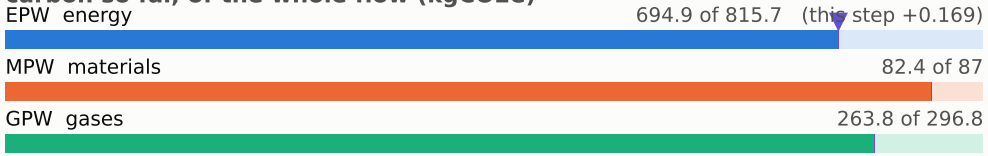

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

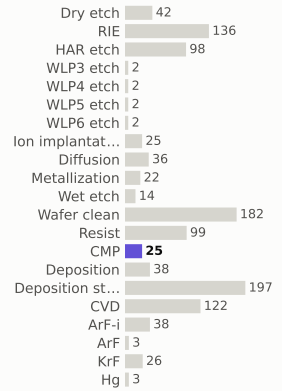

materials deposited (g)

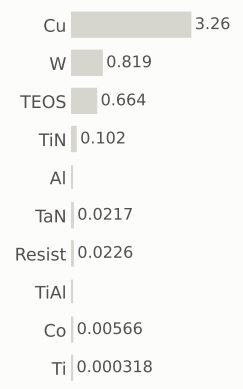

gases emitted (g)

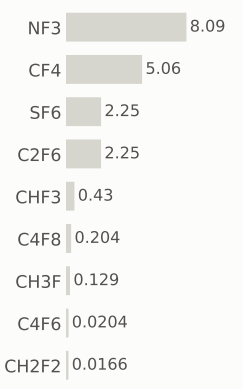

Step #19820: Wafer_clean

clean · Wafer_clean

0.169	1,041.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

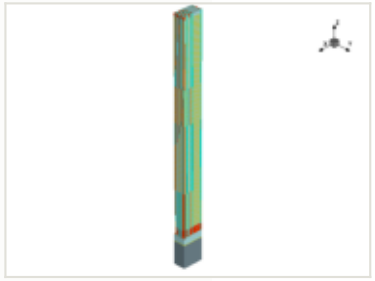

x cut at -0.570 µm

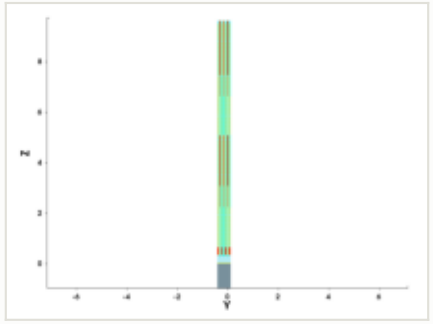

y cut at -0.150 µm

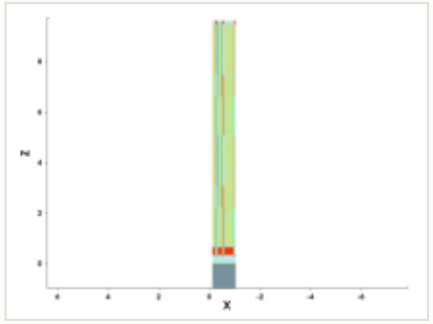

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

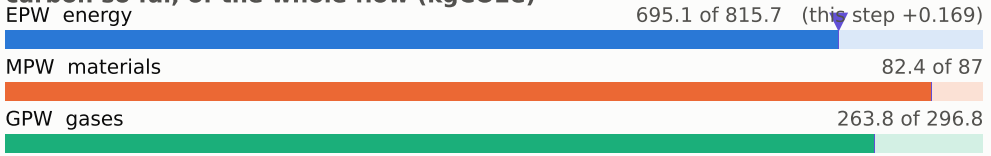

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

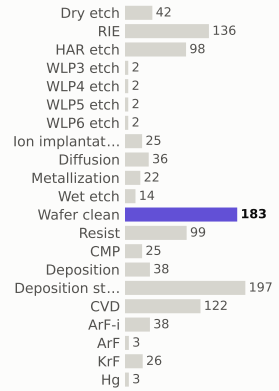

materials deposited (g)

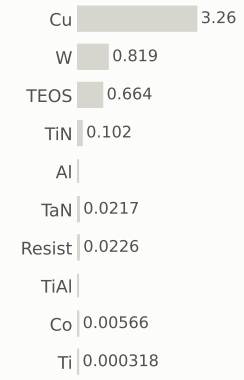

gases emitted (g)

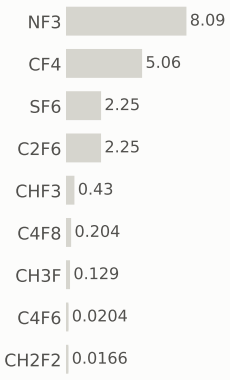

Step #19830: RIE

etch_isotropic · RIE

1.04	1,042.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

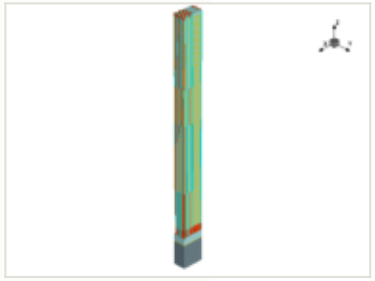

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

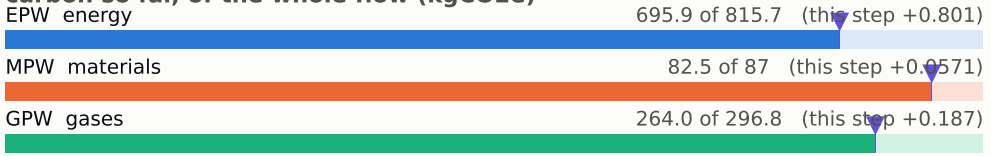

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

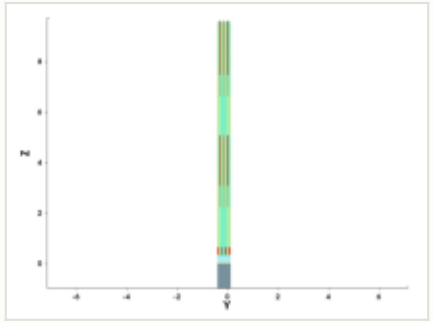

y cut at -0.150 µm

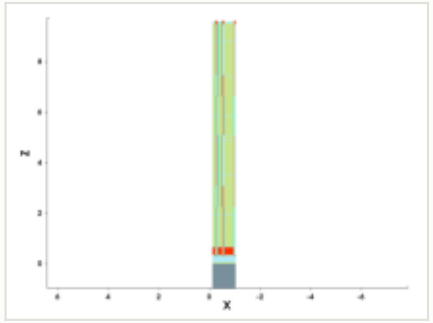

mask for this step

no mask for this step

steps by process area

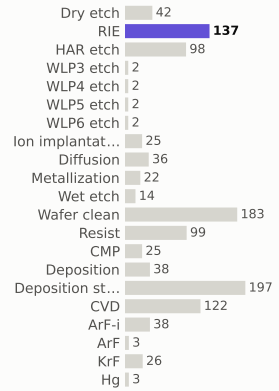

materials deposited (g)

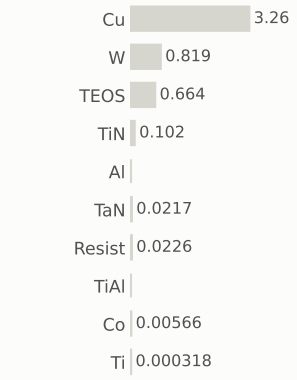

gases emitted (g)

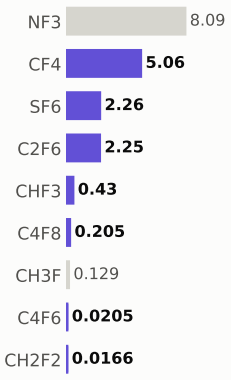

Step #19840: CVD

depo_isotropic · CVD

1.31	1,043.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

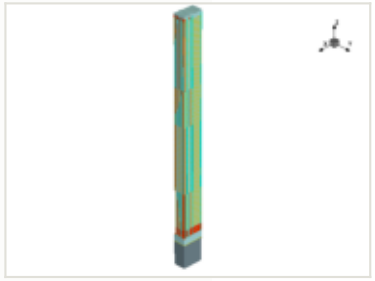

x cut at -0.570 µm

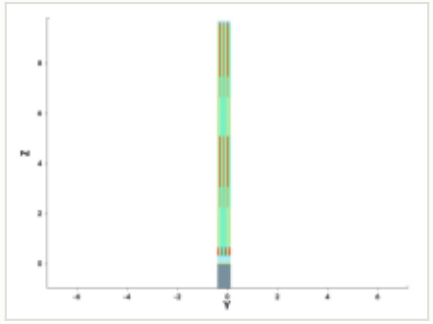

y cut at -0.150 µm

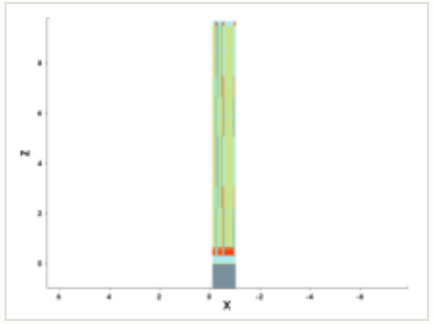

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.07 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

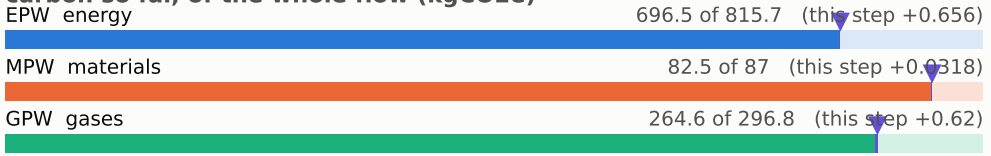

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

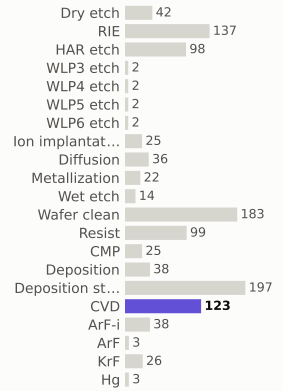

materials deposited (g)

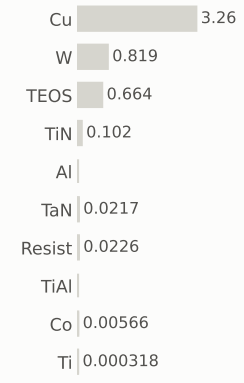

gases emitted (g)

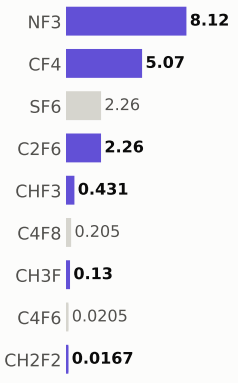

Step #19850: CMP

etch_cmp · CMP

0.169	1,043.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

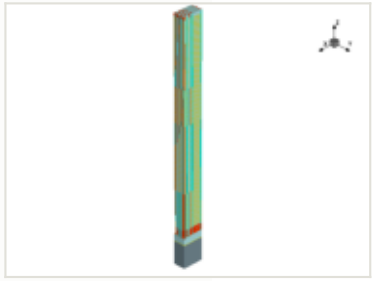

x cut at -0.570 µm

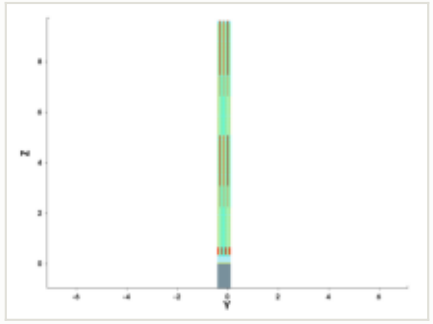

y cut at -0.150 µm

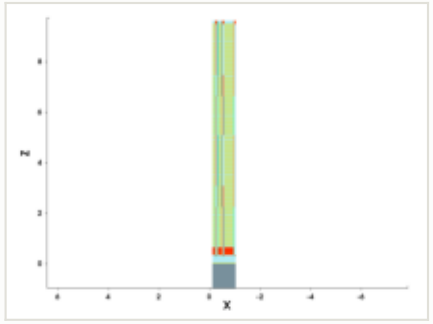

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

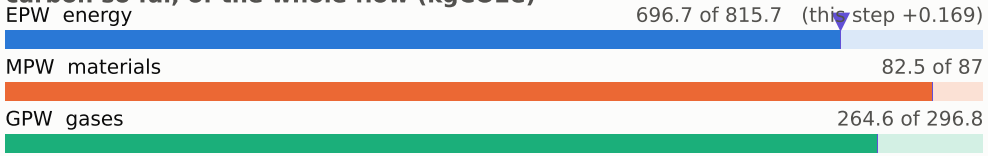

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

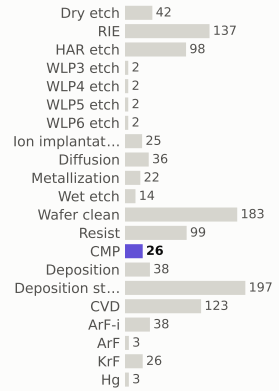

materials deposited (g)

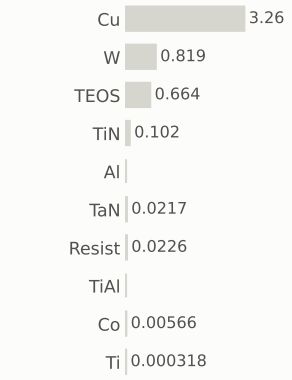

gases emitted (g)

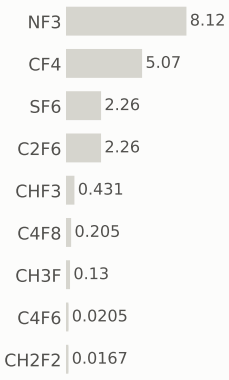

Step #19860: Wafer_clean

clean · Wafer_clean

0.169	1,044.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

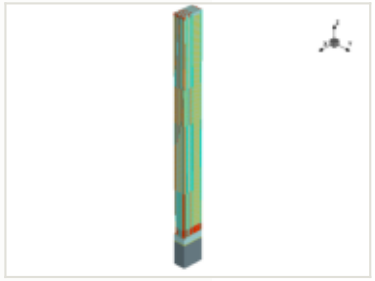

x cut at -0.570 µm

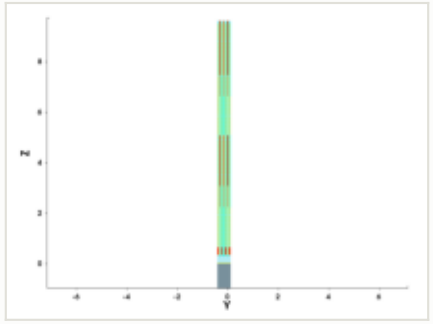

y cut at -0.150 µm

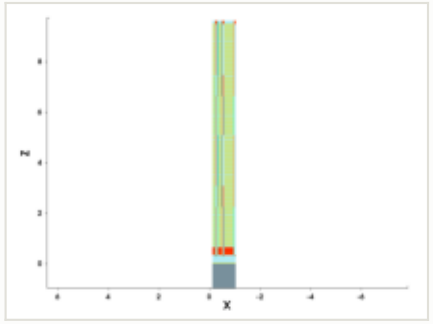

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

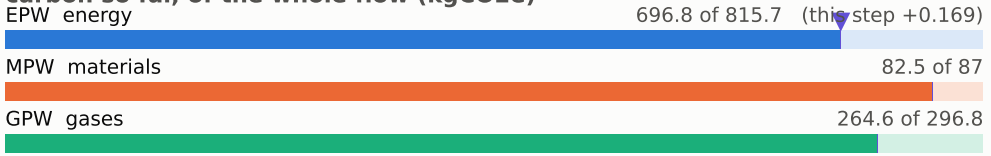

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

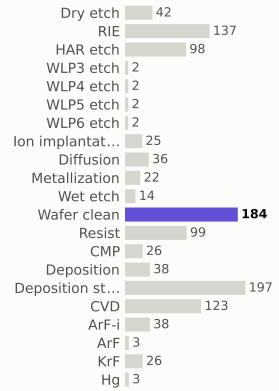

materials deposited (g)

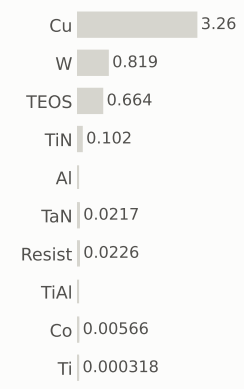

gases emitted (g)

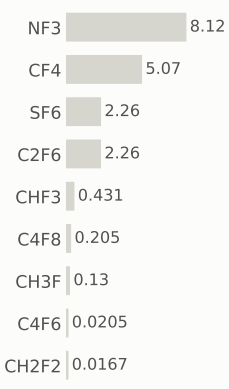

Step #19880: CVD

depo_isotropic · CVD

1.31	1,045.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

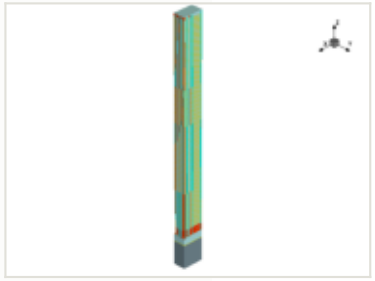

x cut at -0.570 µm

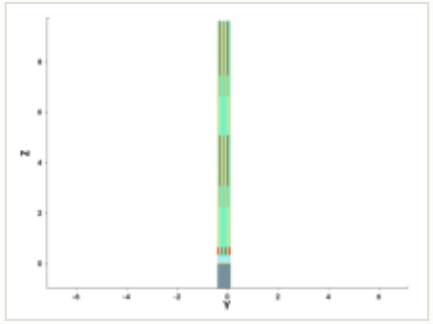

y cut at -0.150 µm

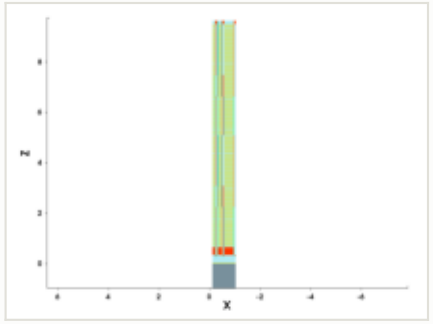

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.003 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

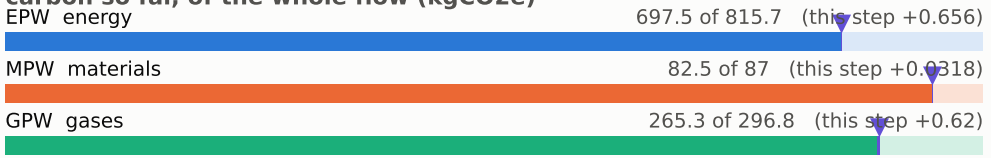

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

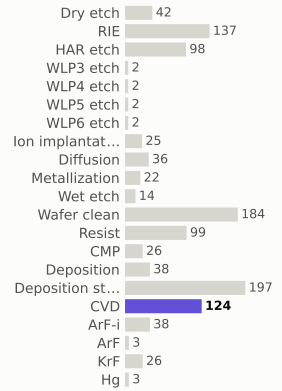

materials deposited (g)

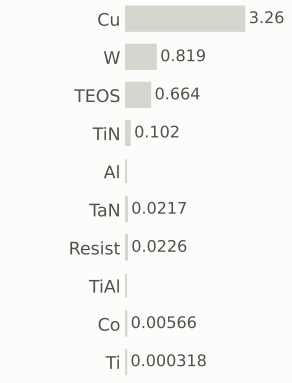

gases emitted (g)

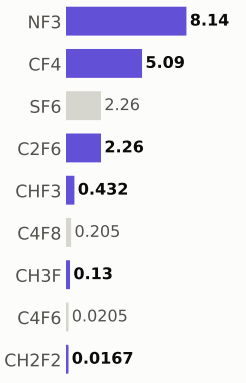

Step #19890: ArF

litho_patterning · ArF

0.199	1,045.5	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

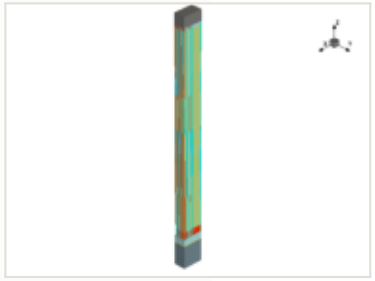

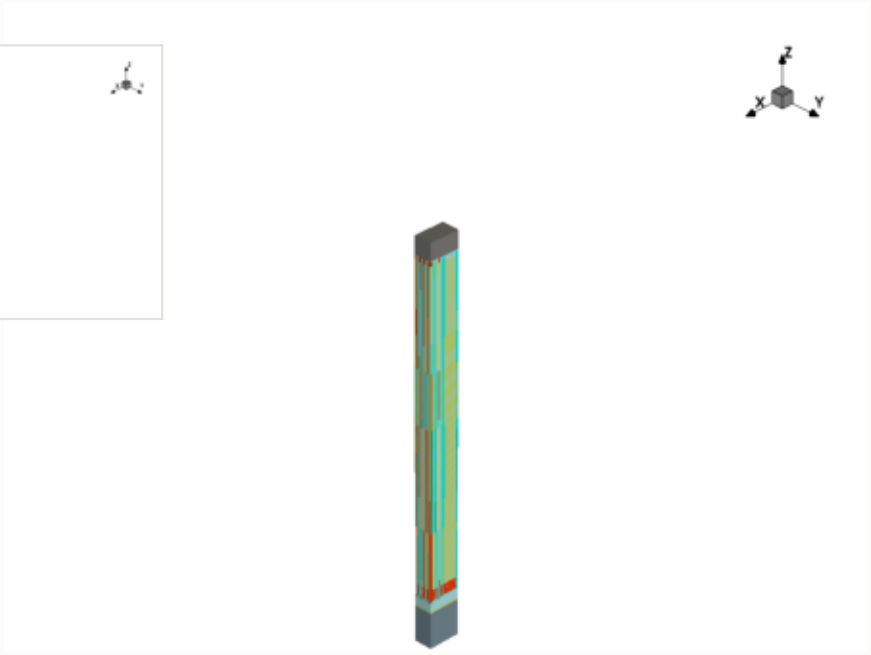

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

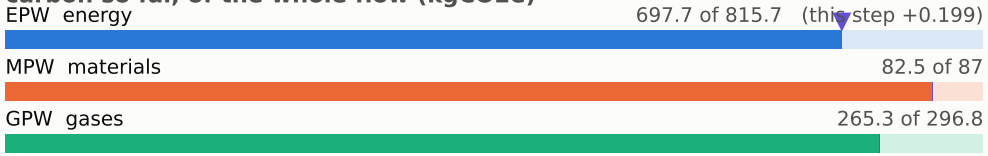

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

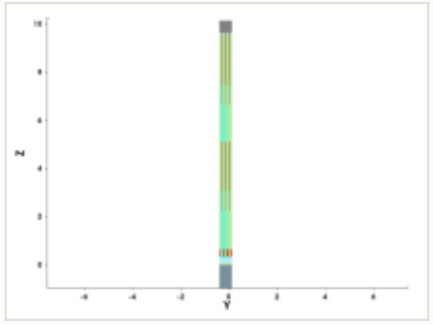

y cut at -0.150 µm

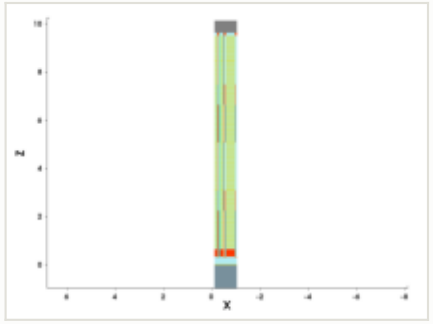

mask: layer 36:0, negative (GDSII)

nothing in the clip window

steps by process area

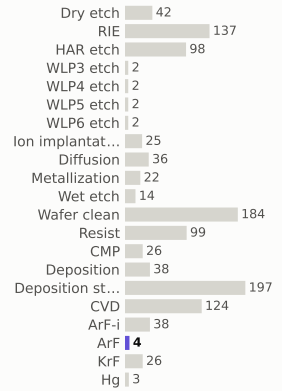

materials deposited (g)

gases emitted (g)

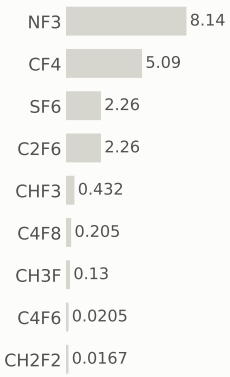

Step #19900: RIE

etch_anisotropic · RIE

1.04	1,046.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

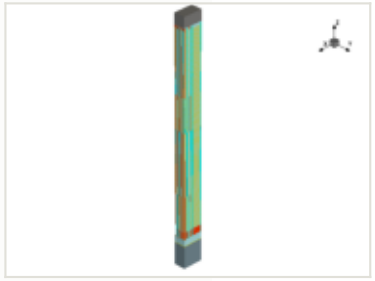

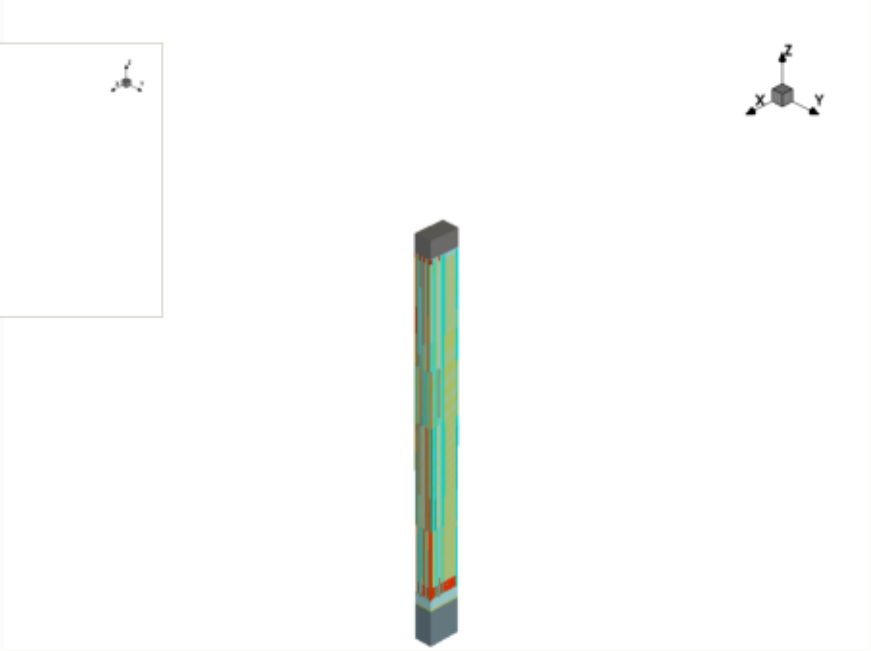

x cut at -0.570 µm

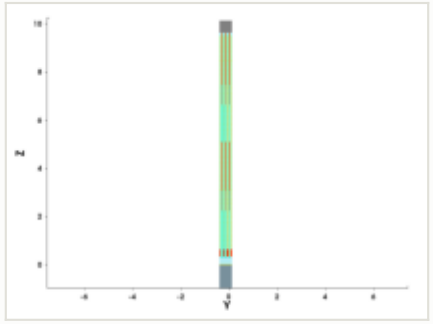

y cut at -0.150 µm

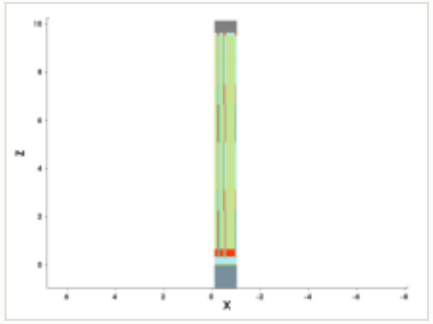

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

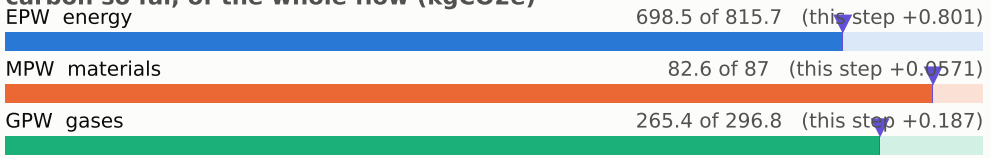

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

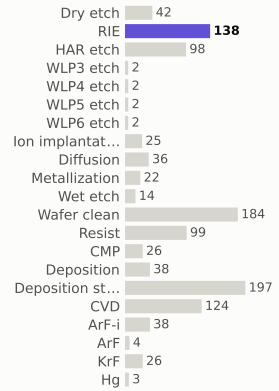

materials deposited (g)

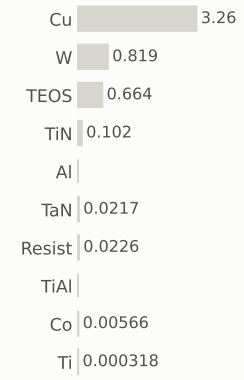

gases emitted (g)

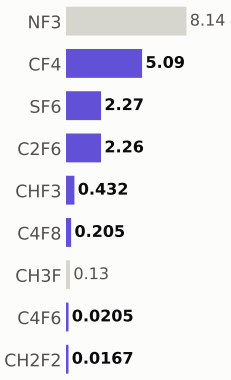

Step #19910: RIE

etch_anisotropic · RIE

1.04	1,047.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

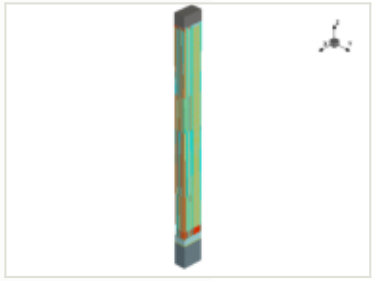

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

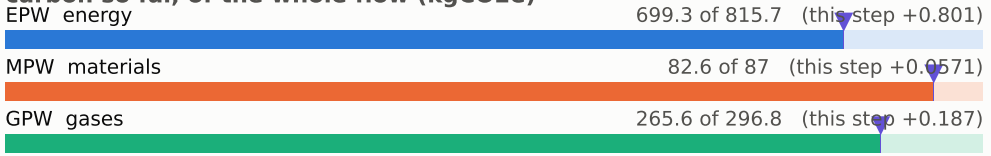

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

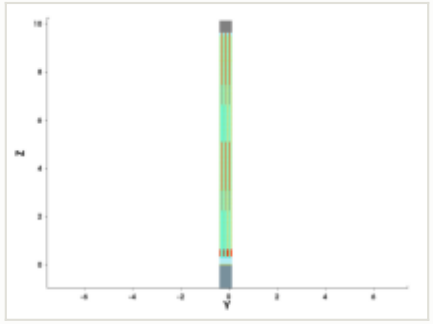

y cut at -0.150 µm

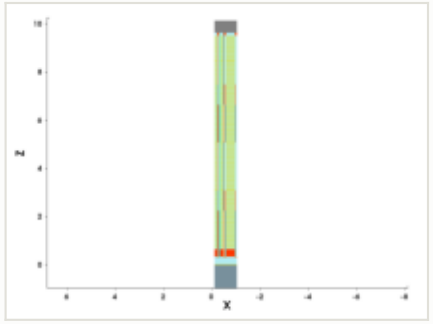

mask for this step

no mask for this step

steps by process area

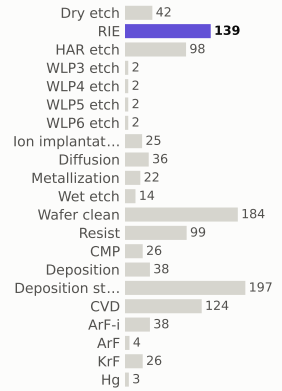

materials deposited (g)

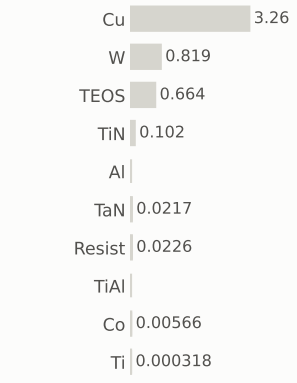

gases emitted (g)

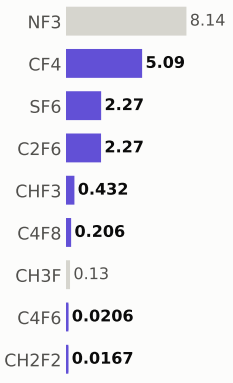

Step #19920: Dry_etch

etch_strip · Dry_etch

0.801	1,048.4	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

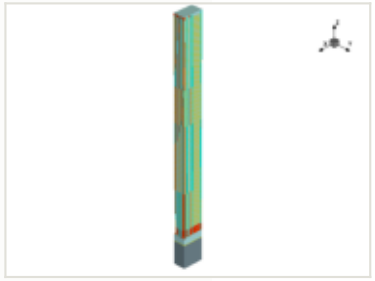

x cut at -0.570 µm

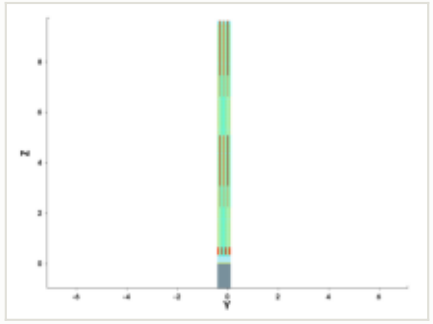

y cut at -0.150 µm

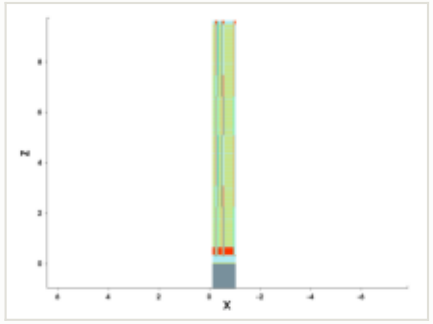

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

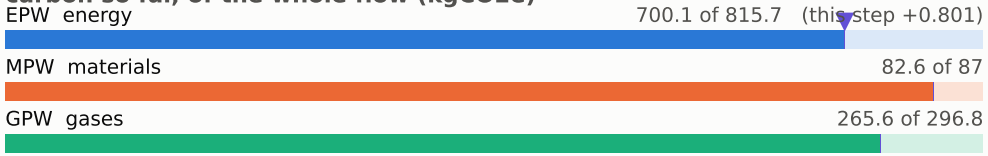

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

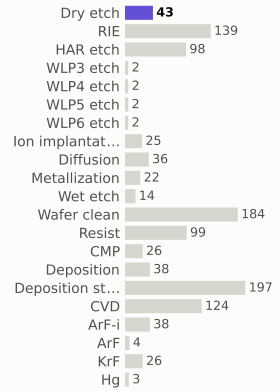

materials deposited (g)

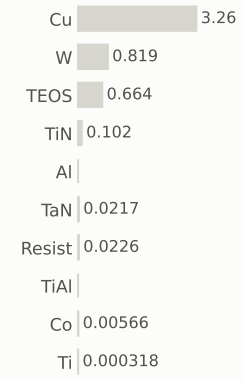

gases emitted (g)

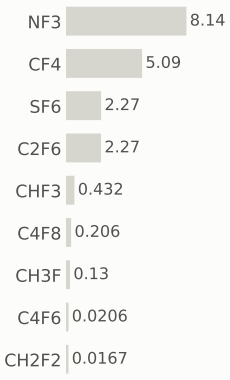

Step #19930: Wafer_clean

clean · Wafer_clean

0.169	1,048.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

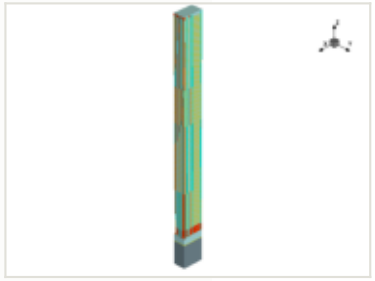

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

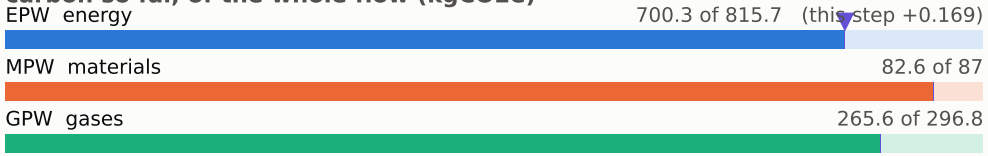

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

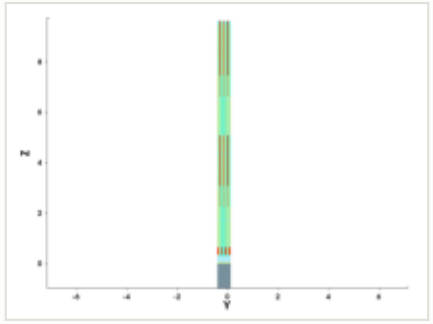

y cut at -0.150 µm

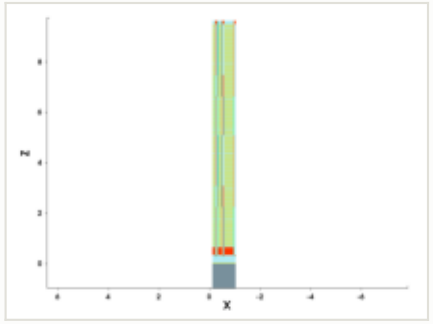

mask for this step

no mask for this step

steps by process area

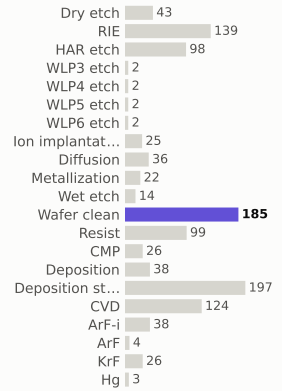

materials deposited (g)

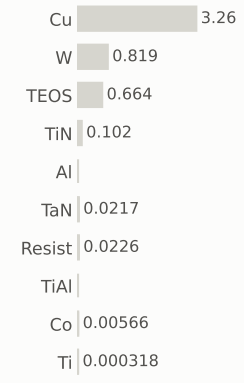

gases emitted (g)

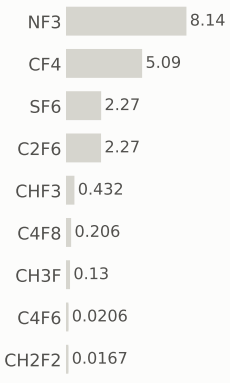

Step #19940: CVD

depo_isotropic · CVD

1.31	1,049.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

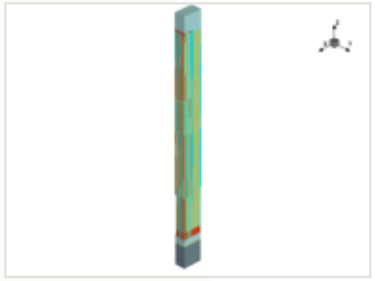

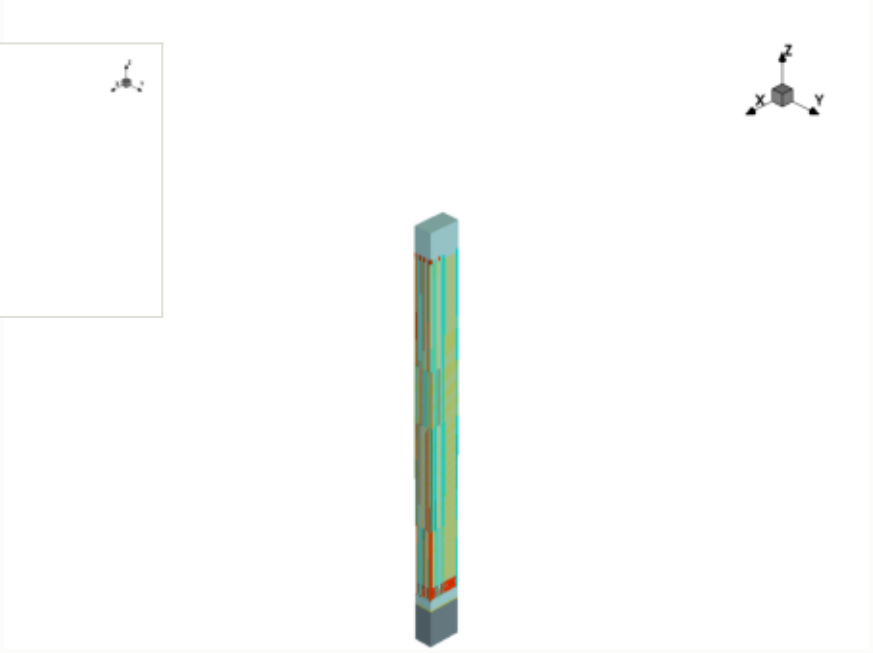

x cut at -0.570 µm

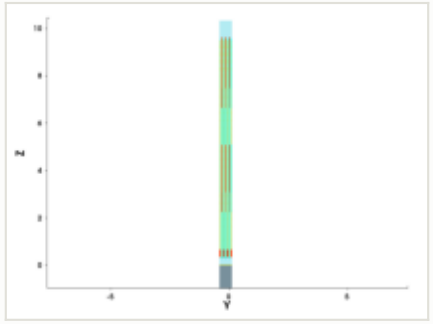

y cut at -0.150 µm

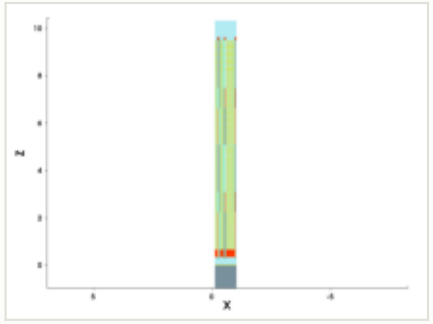

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.7 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

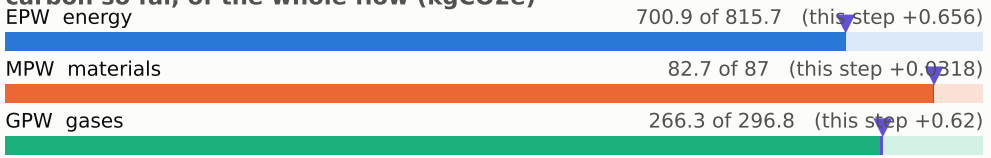

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

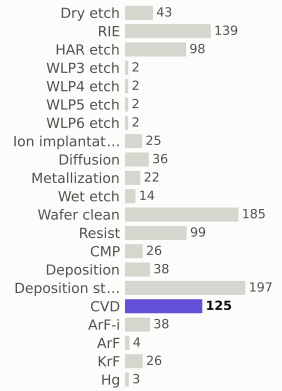

materials deposited (g)

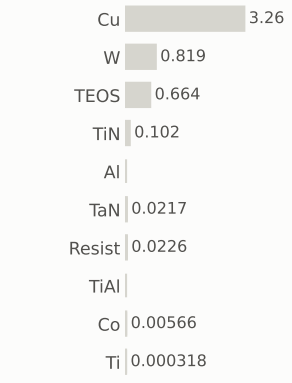

gases emitted (g)

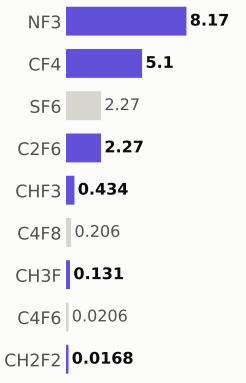

Step #19950: CMP

etch_cmp · CMP

0.169	1,050.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

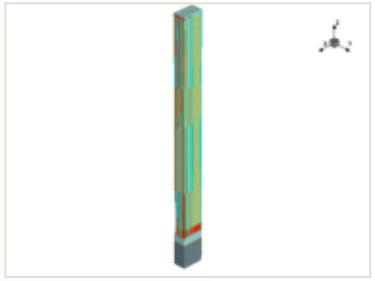

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

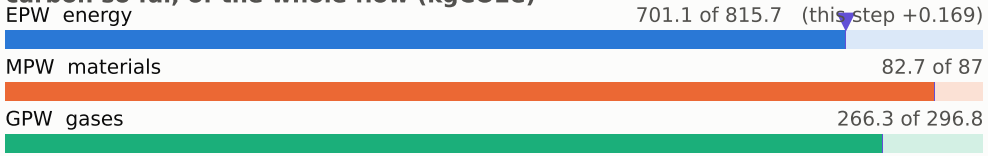

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

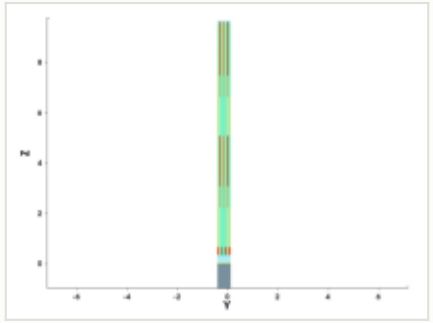

y cut at -0.150 µm

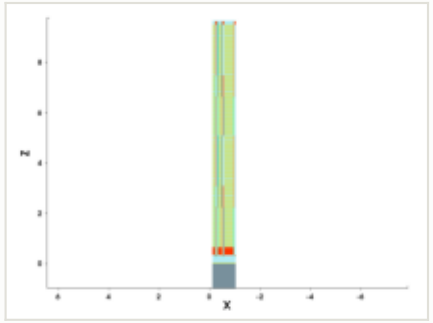

mask for this step

no mask for this step

steps by process area

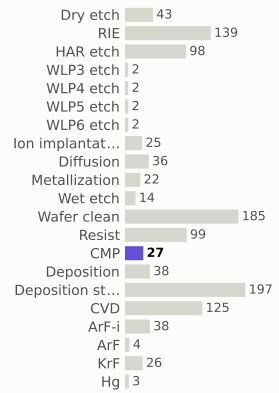

materials deposited (g)

gases emitted (g)

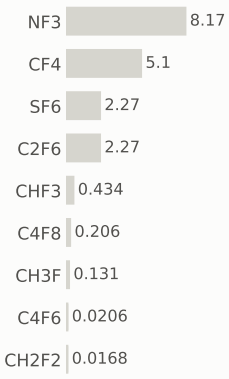

Step #19960: Wafer_clean

clean · Wafer_clean

0.169	1,050.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

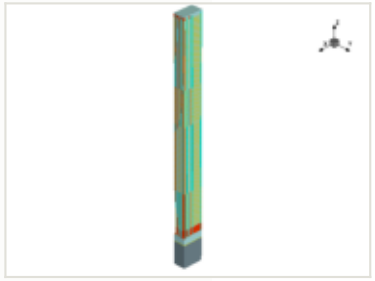

x cut at -0.570 µm

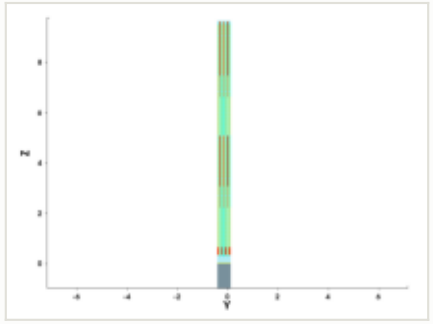

y cut at -0.150 µm

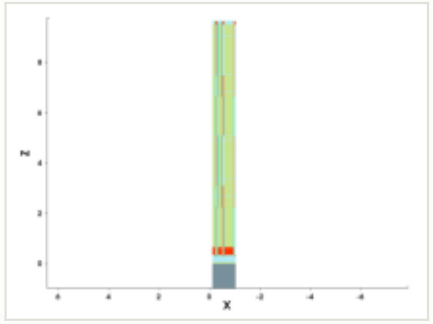

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

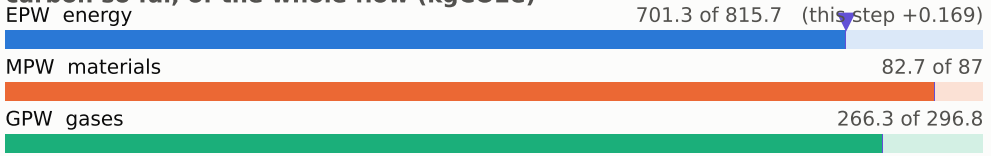

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

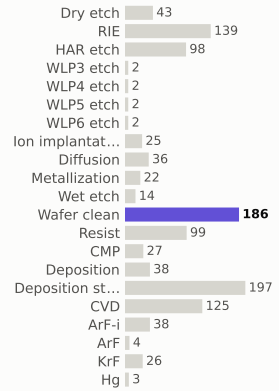

materials deposited (g)

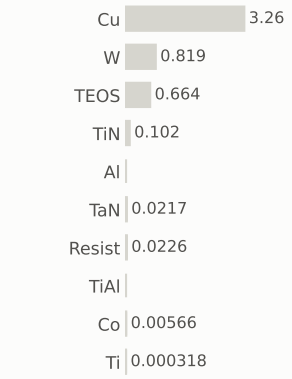

gases emitted (g)

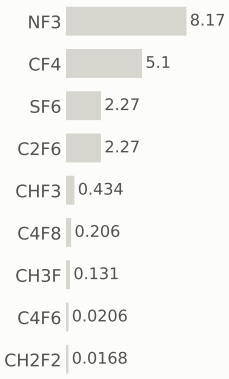

Step #19980: CVD

depo_isotropic · CVD

1.31	1,051.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

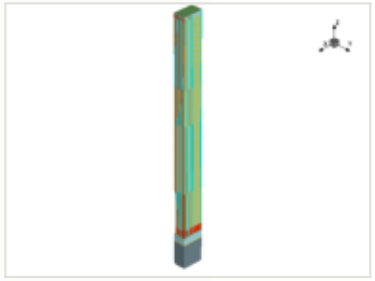

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

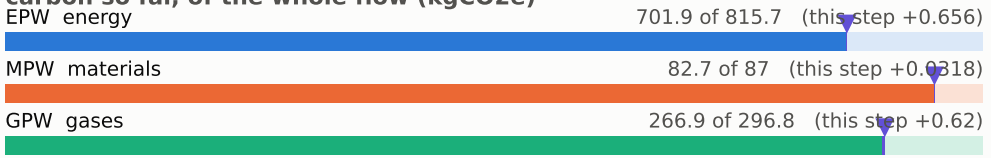

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

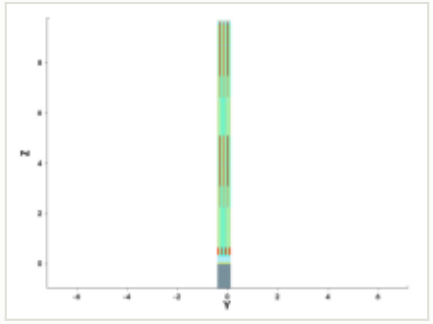

y cut at -0.150 µm

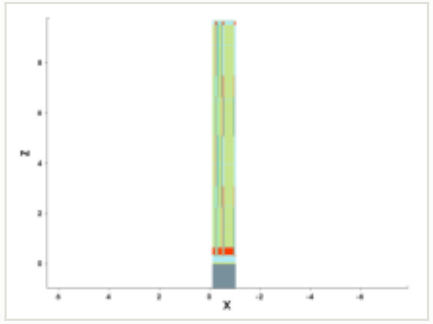

mask for this step

no mask for this step

steps by process area

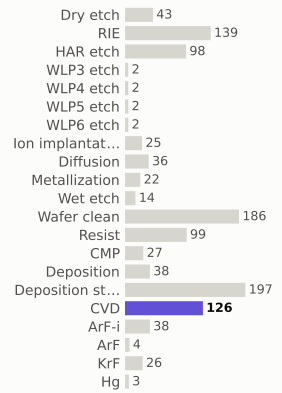

materials deposited (g)

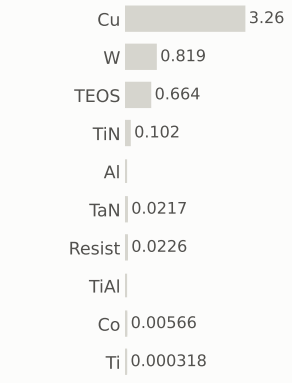

gases emitted (g)

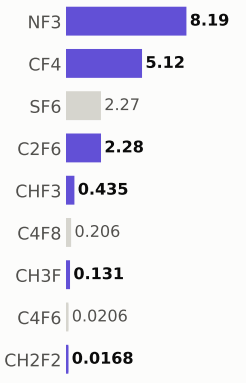

Step #19990: KrF

litho_patterning · KrF

0.199	1,051.7	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

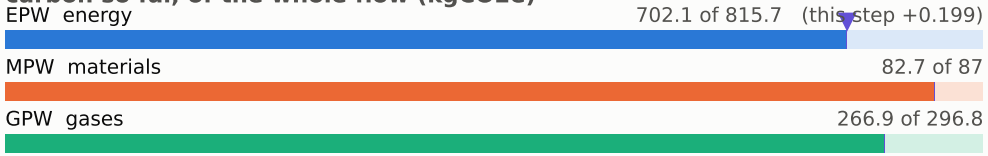

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

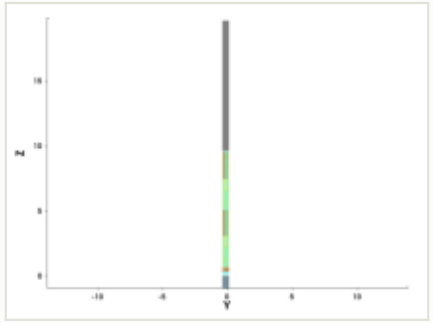

y cut at -0.150 µm

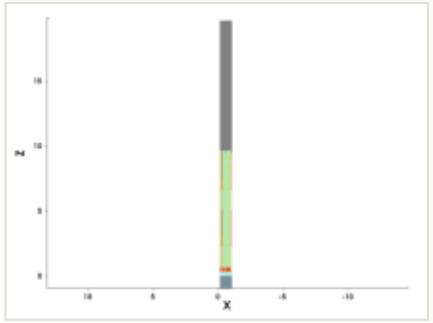

mask: layer 37:0, negative (GDSII)

nothing in the clip window

steps by process area

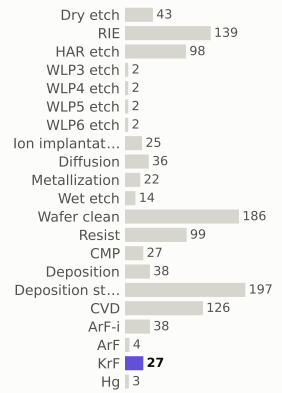

materials deposited (g)

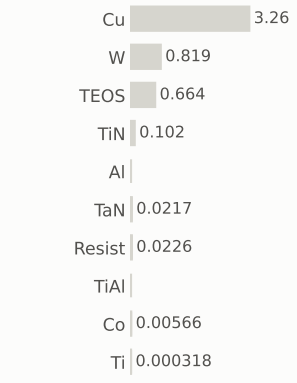

gases emitted (g)

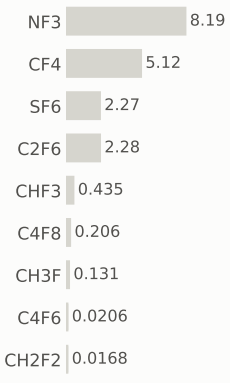

Step #20000: RIE

etch_anisotropic · RIE

1.04	1,052.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

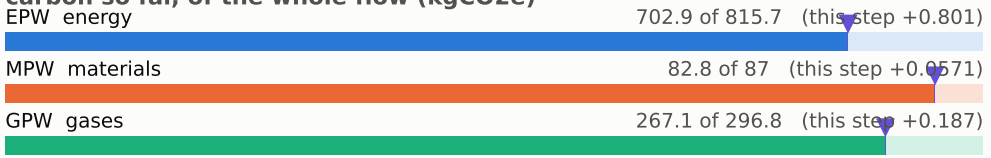

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

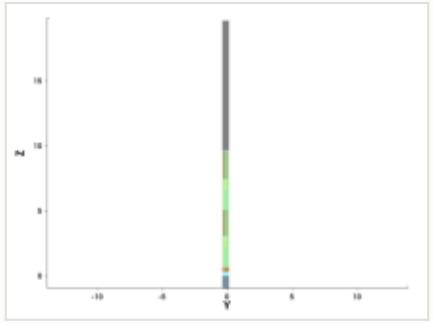

y cut at -0.150 µm

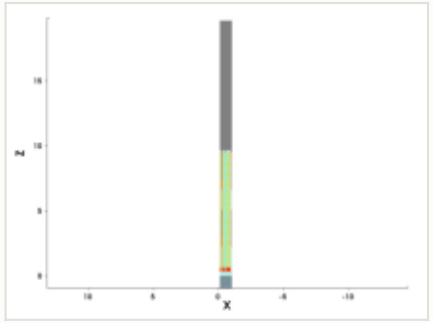

mask for this step

no mask for this step

steps by process area

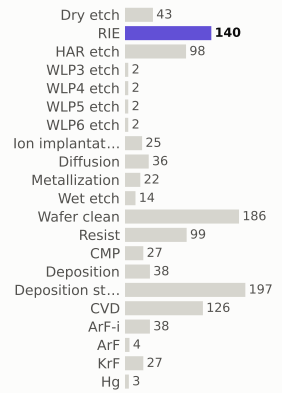

materials deposited (g)

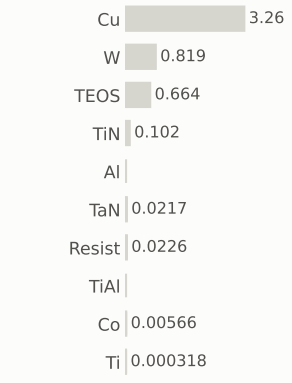

gases emitted (g)

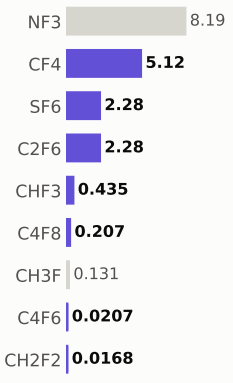

Step #20010: RIE

etch_anisotropic · RIE

1.04	1,053.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

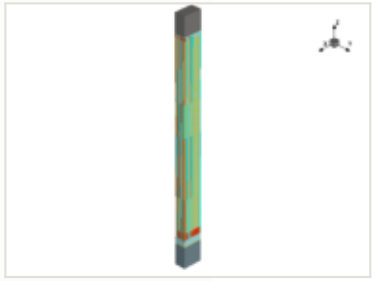

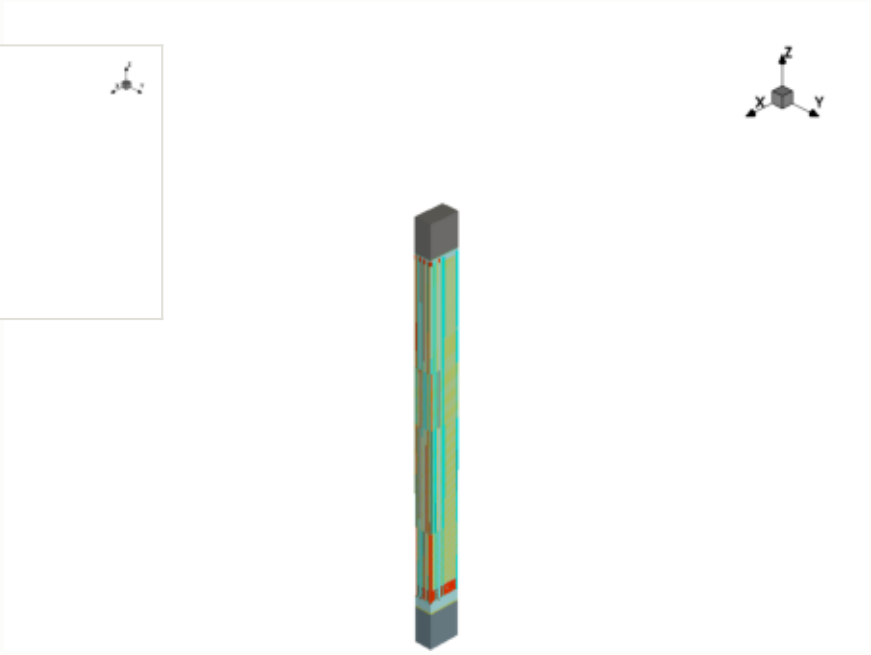

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

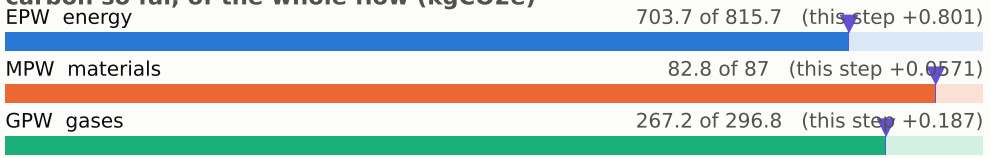

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

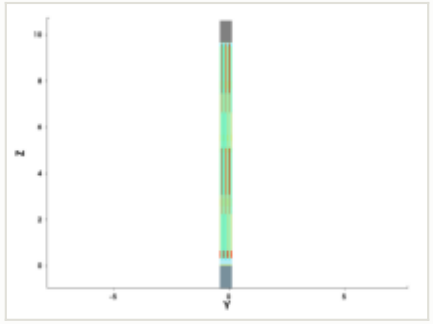

y cut at -0.150 µm

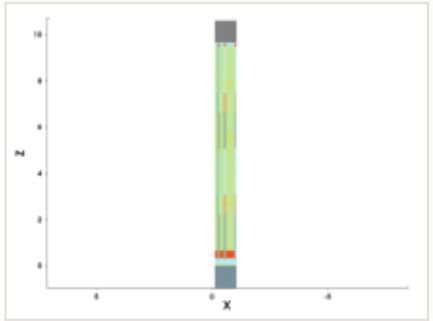

mask for this step

no mask for this step

steps by process area

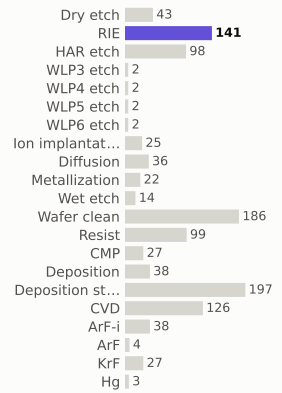

materials deposited (g)

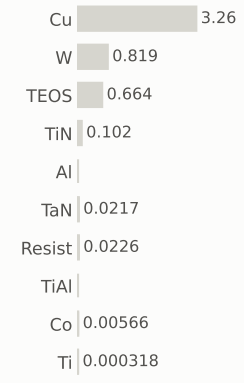

gases emitted (g)

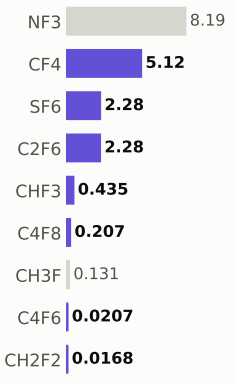

Step #20020: RIE

etch_anisotropic · RIE

1.04	1,054.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

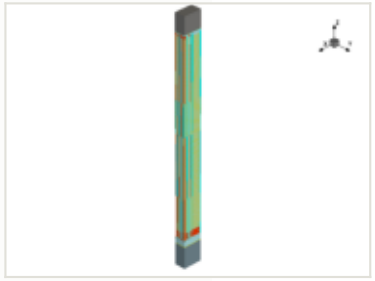

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

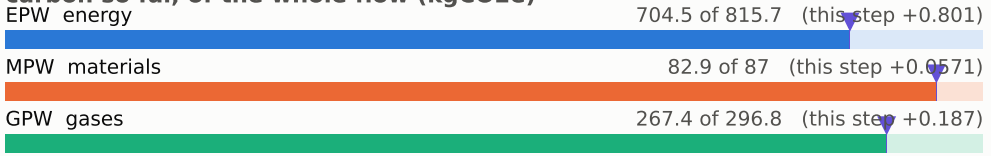

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

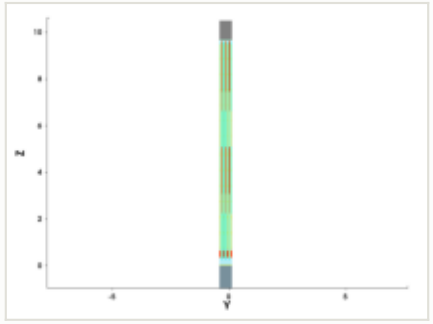

y cut at -0.150 µm

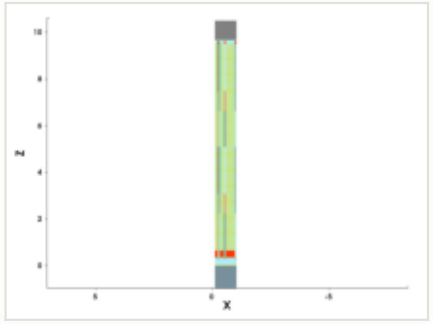

mask for this step

no mask for this step

steps by process area

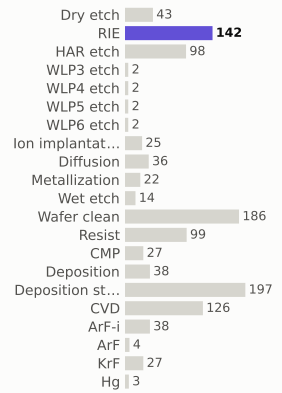

materials deposited (g)

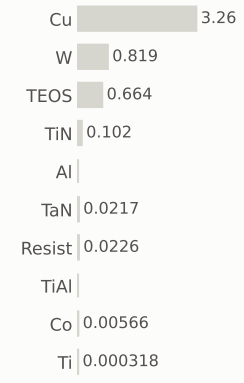

gases emitted (g)

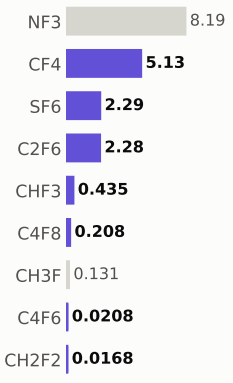

Step #20030: Dry_etch

etch_strip · Dry_etch

0.801	1,055.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

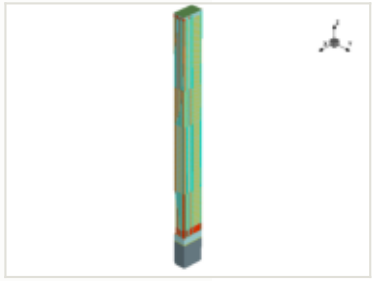

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

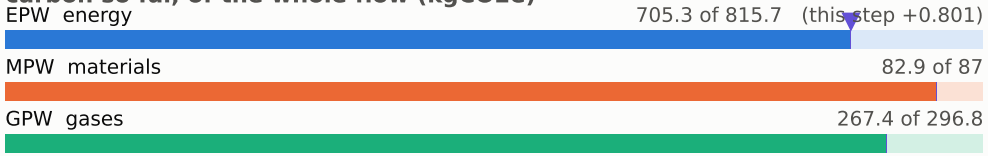

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

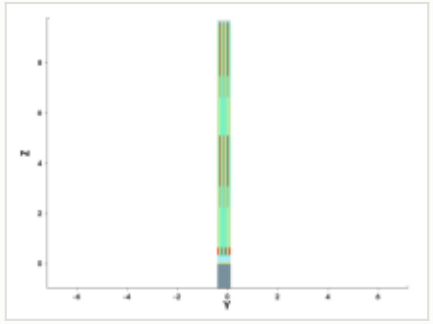

y cut at -0.150 µm

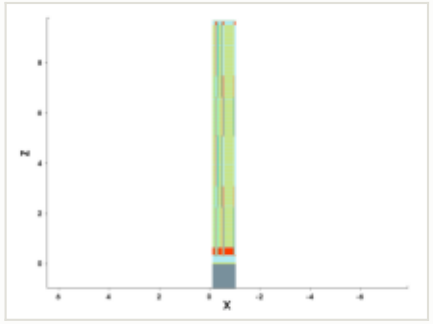

mask for this step

no mask for this step

steps by process area

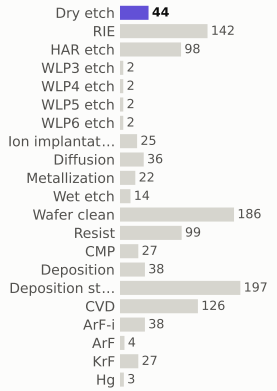

materials deposited (g)

gases emitted (g)

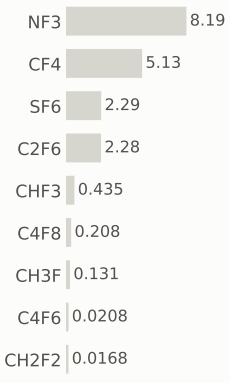

Step #20040: Wafer_clean

clean · Wafer_clean

0.169	1,055.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

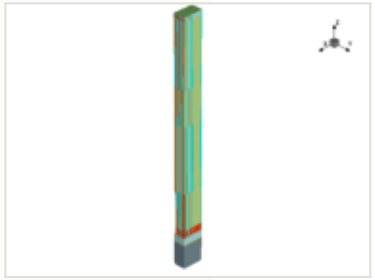

x cut at -0.570 µm

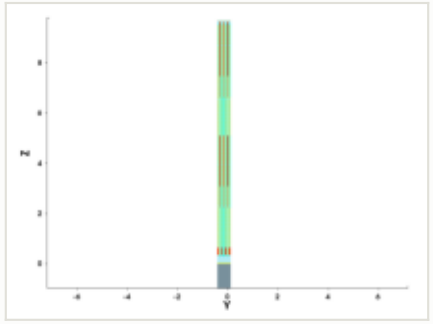

y cut at -0.150 µm

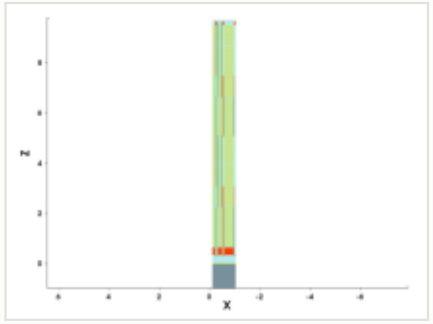

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

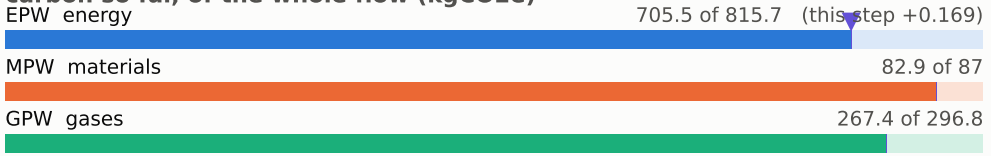

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

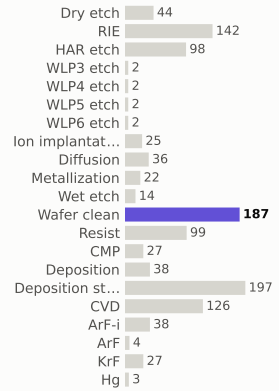

materials deposited (g)

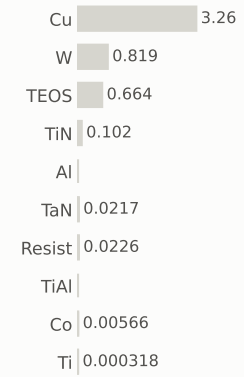

gases emitted (g)

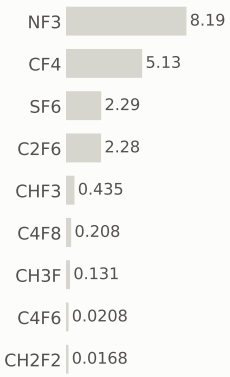

Step #20050: Deposition

depo_isotropic · Deposition

0.656	1,056.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

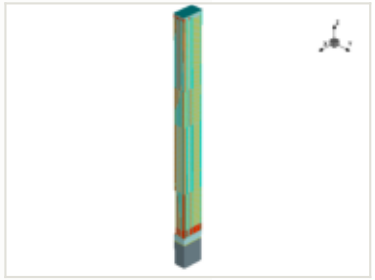

x cut at -0.570 µm

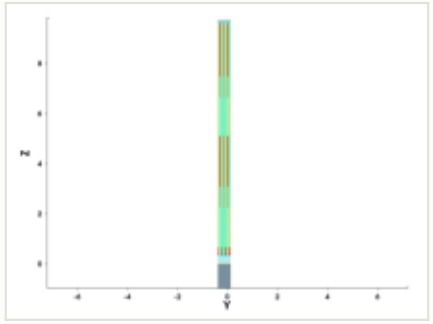

y cut at -0.150 µm

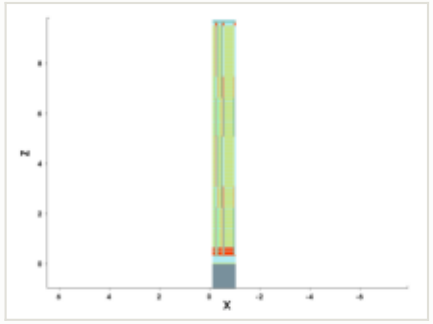

mask for this step

no mask for this step

this step

process area	Deposition
material	—
thickness	0.03 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

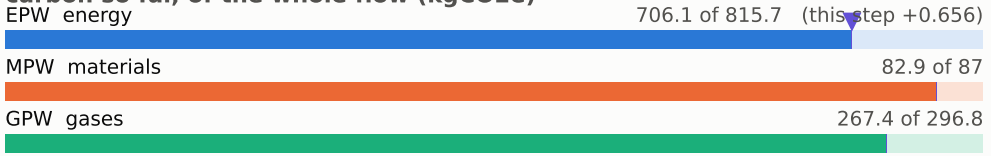

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

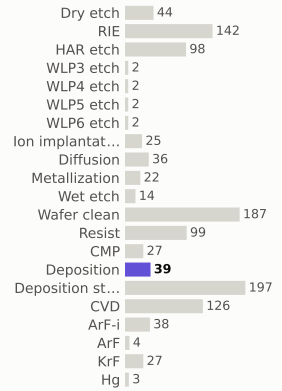

materials deposited (g)

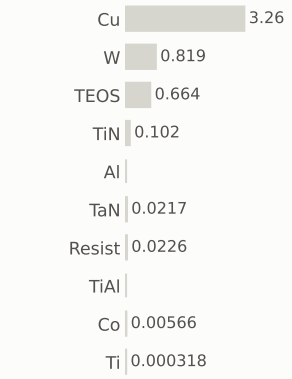

gases emitted (g)

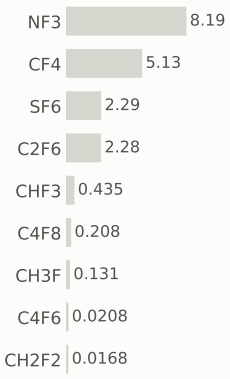

Step #20060: RIE

etch_anisotropic · RIE

1.04	1,057.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

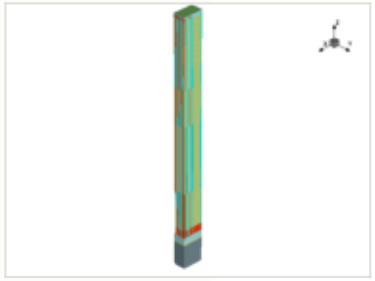

x cut at -0.570 µm

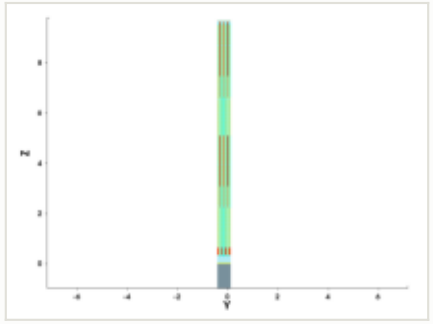

y cut at -0.150 µm

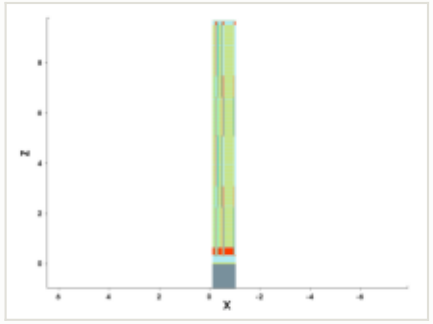

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

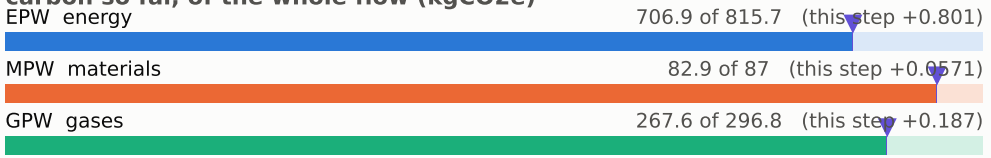

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

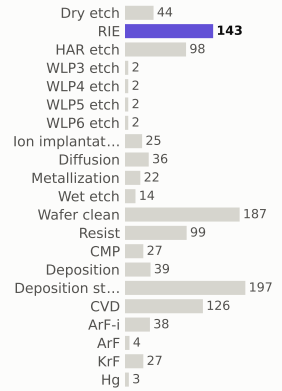

materials deposited (g)

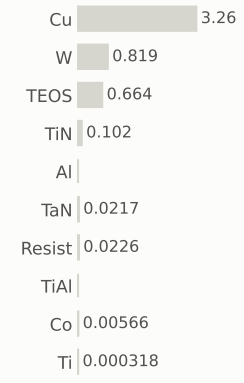

gases emitted (g)

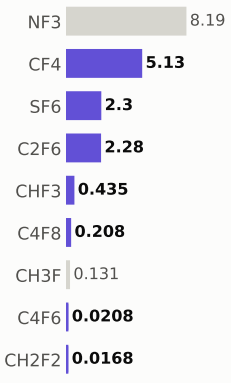

Step #20070: Wet_etch

etch_isotropic · Wet_etch

0.169	1,057.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

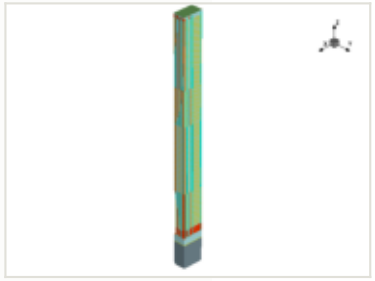

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

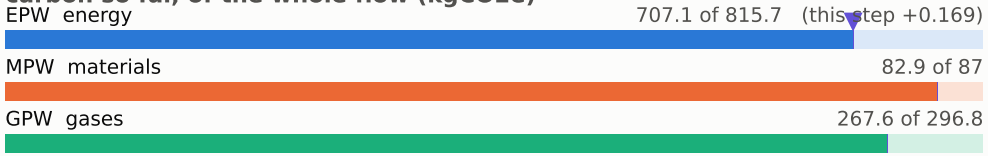

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

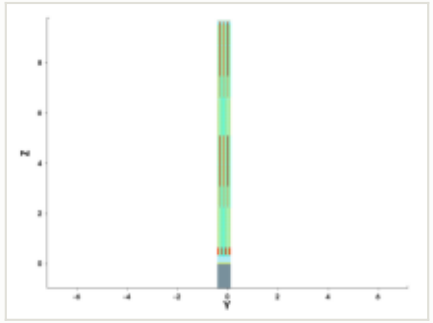

y cut at -0.150 µm

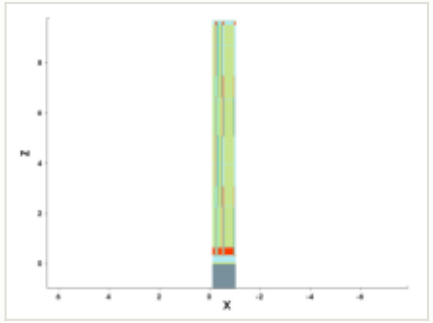

mask for this step

no mask for this step

steps by process area

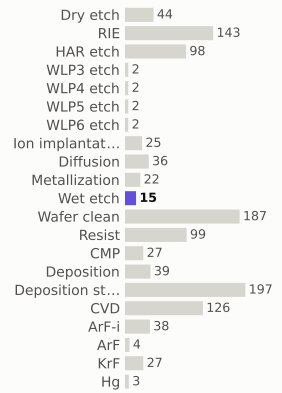

materials deposited (g)

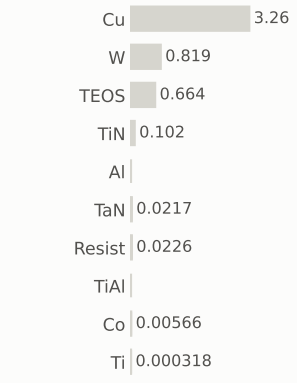

gases emitted (g)

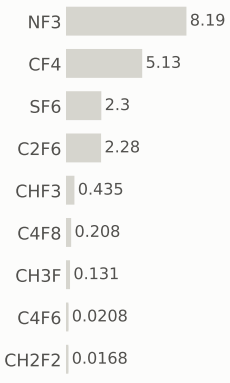

Step #20080: Wet_etch

etch_isotropic · Wet_etch

0.169	1,057.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

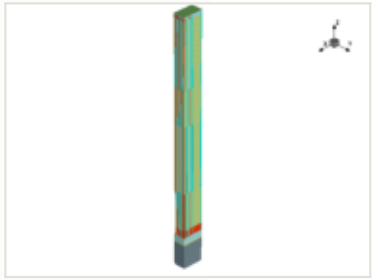

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

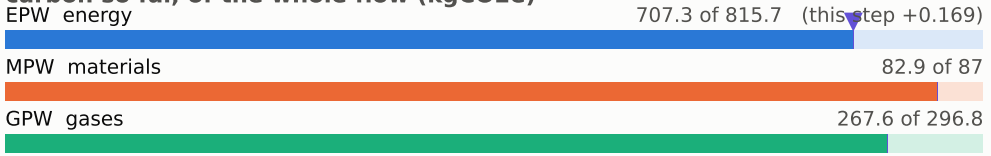

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

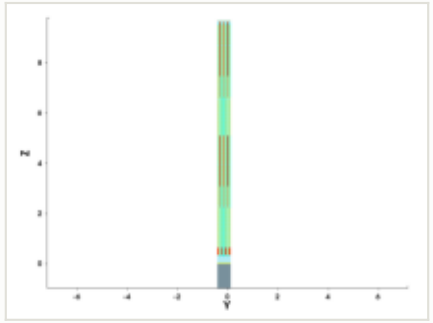

y cut at -0.150 µm

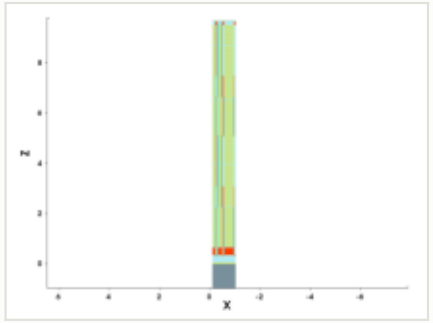

mask for this step

no mask for this step

steps by process area

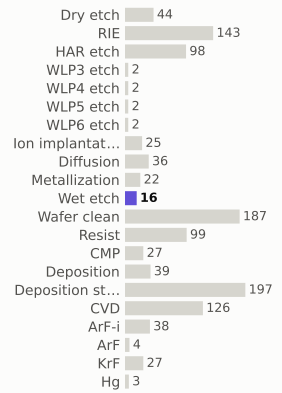

materials deposited (g)

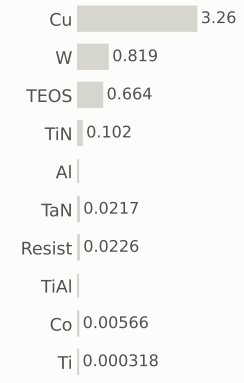

gases emitted (g)

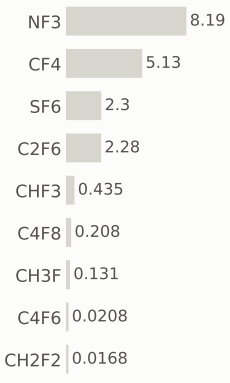

Step #20090: CVD

depo_isotropic · CVD

1.31	1,059.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

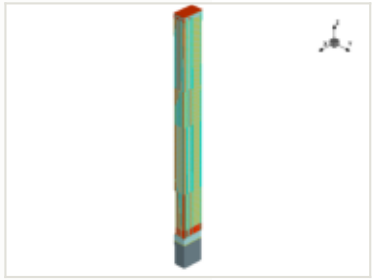

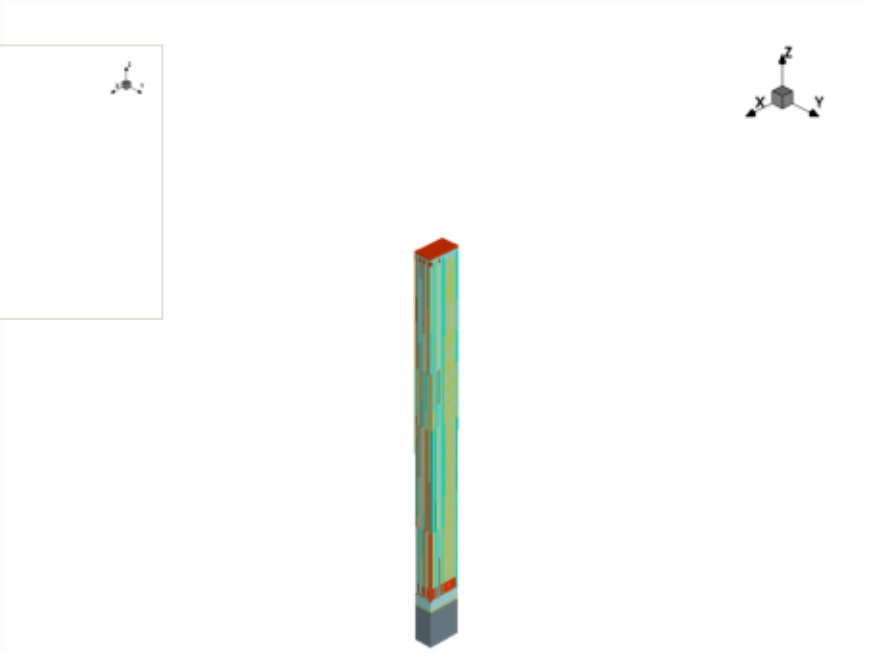

x cut at -0.570 µm

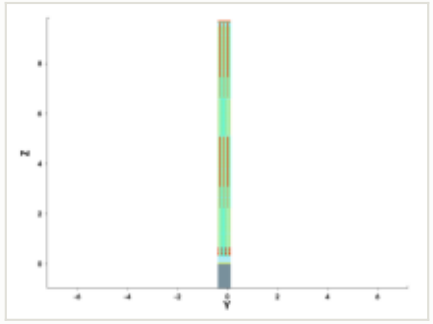

y cut at -0.150 µm

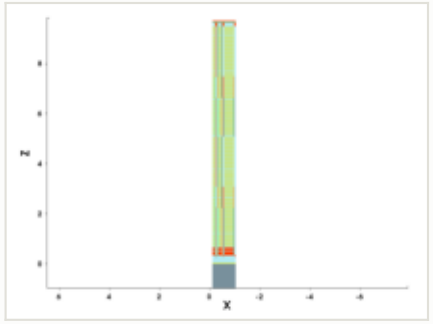

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

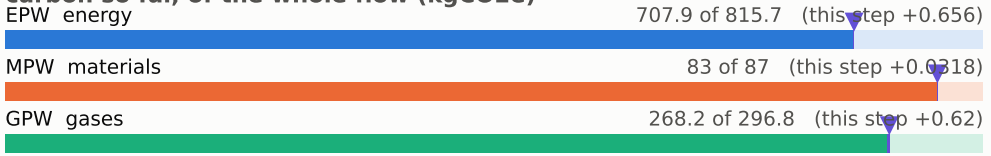

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

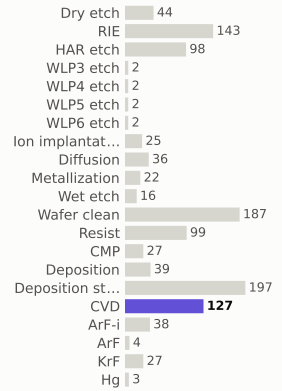

materials deposited (g)

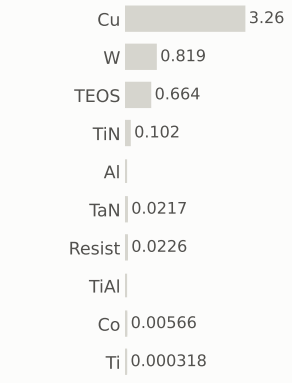

gases emitted (g)

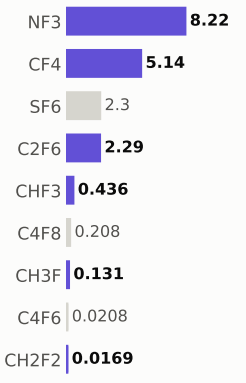

Step #20100: RIE

etch_isotropic · RIE

1.04	1,060.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

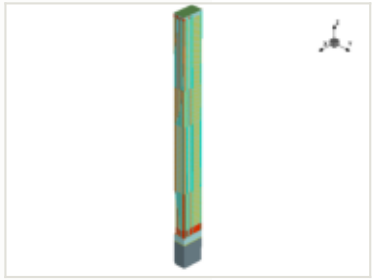

x cut at -0.570 µm

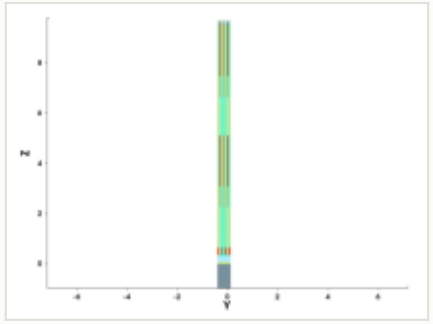

y cut at -0.150 µm

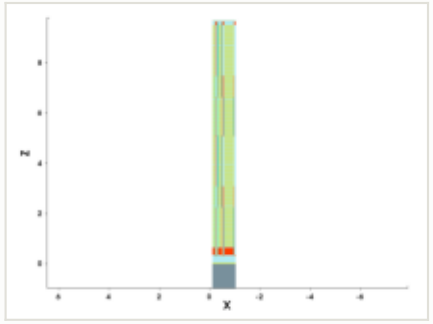

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

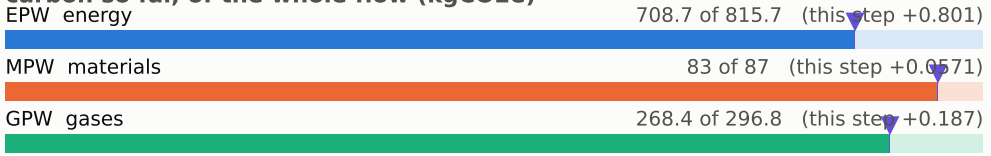

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

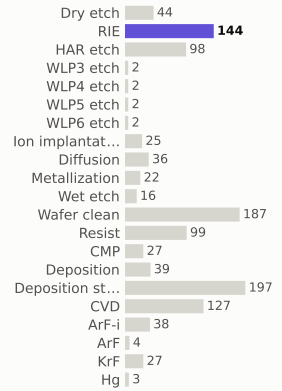

materials deposited (g)

gases emitted (g)

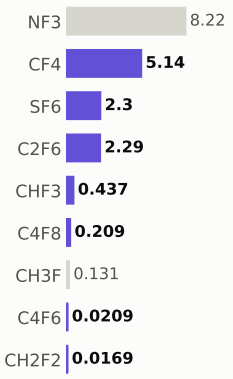

Step #20110: CVD

depo_isotropic · CVD

1.31	1,061.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

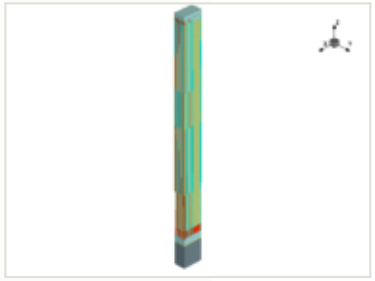

x cut at -0.570 µm

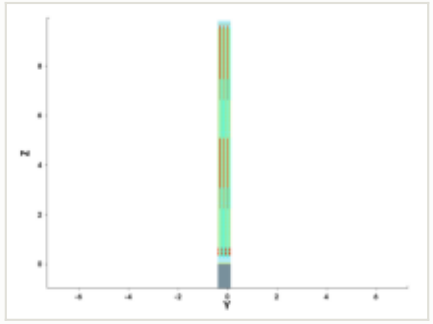

y cut at -0.150 µm

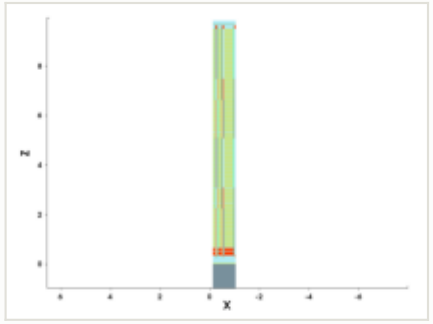

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

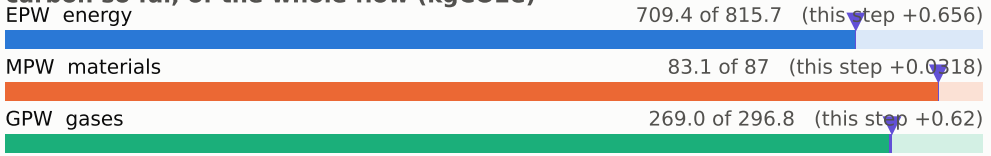

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

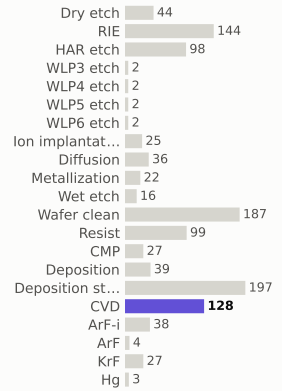

materials deposited (g)

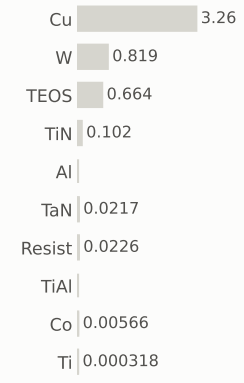

gases emitted (g)

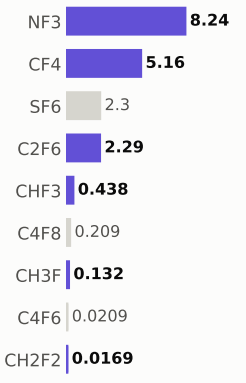

Step #20120: CMP

etch_cmp · CMP

0.169	1,061.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

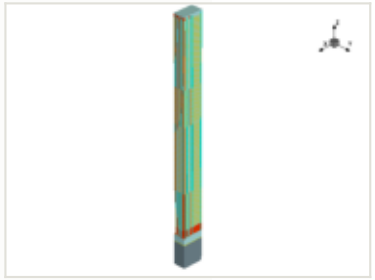

x cut at -0.570 µm

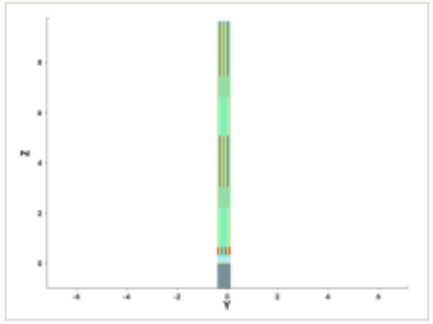

y cut at -0.150 µm

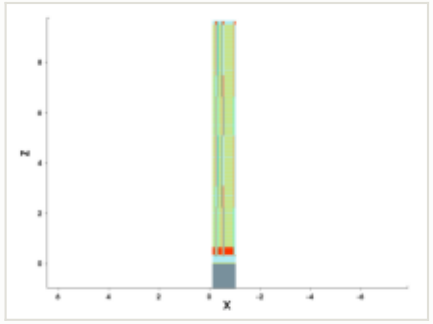

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

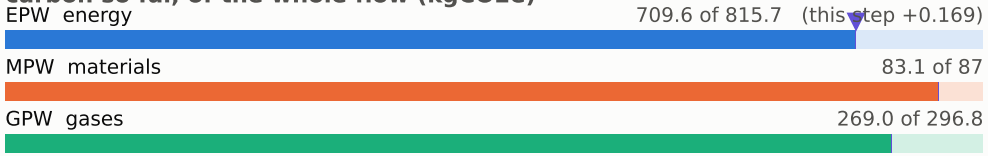

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

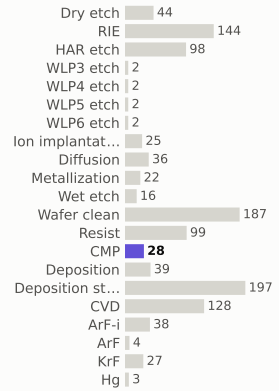

materials deposited (g)

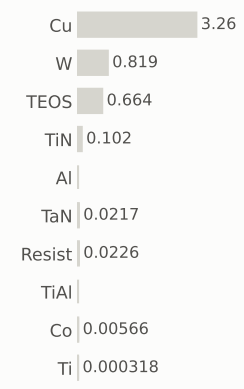

gases emitted (g)



Step #20130: Wafer_clean

clean · Wafer_clean

0.169	1,061.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

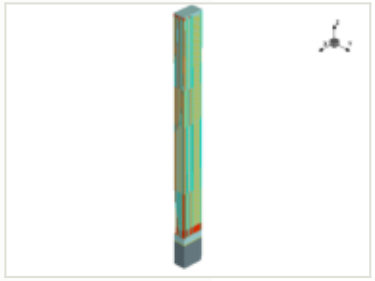

x cut at -0.570 µm

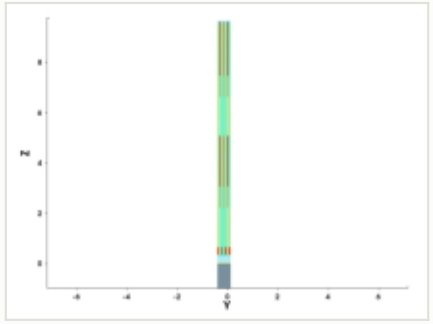

y cut at -0.150 µm

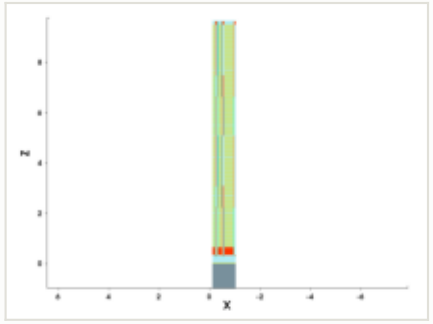

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

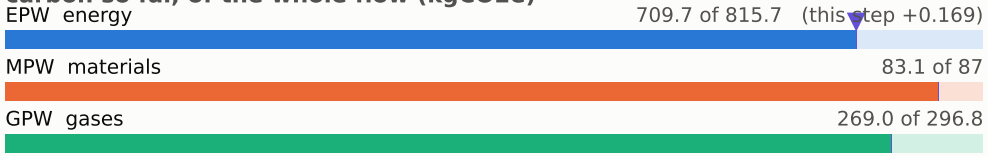

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

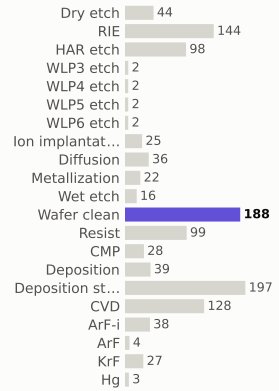

materials deposited (g)

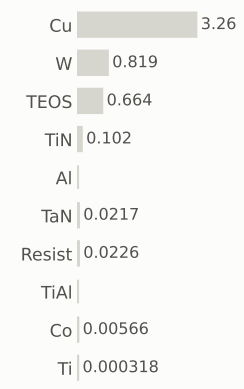

gases emitted (g)



Step #20150: ArF

litho_patterning · ArF

0.199	1,062.0	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

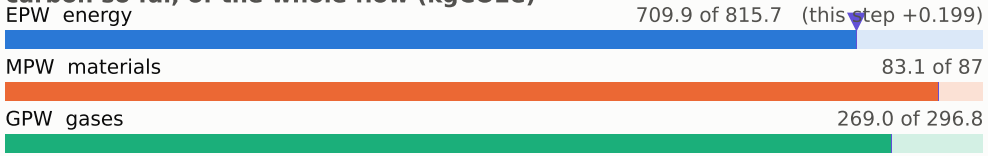

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

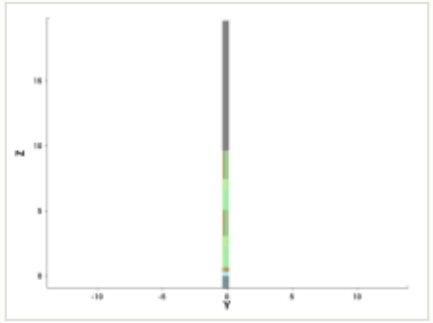

y cut at -0.150 µm

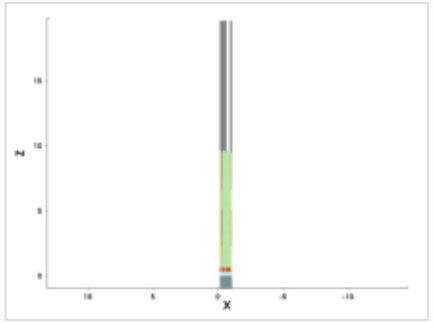

mask: layer 38:0, negative (GDSII)

steps by process area

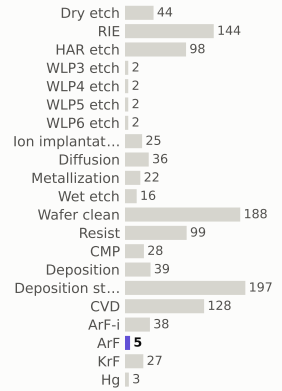

materials deposited (g)



gases emitted (g)



Step #20160: HAR_etch

etch_anisotropic · HAR_etch

1.04	1,063.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

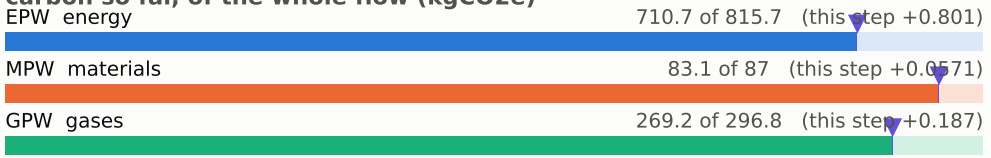

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

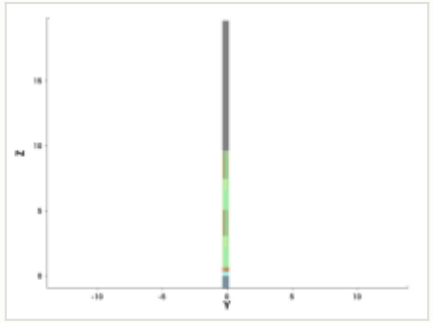

y cut at -0.150 µm

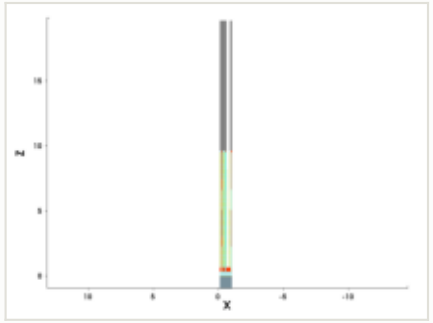

mask for this step

no mask for this step

steps by process area

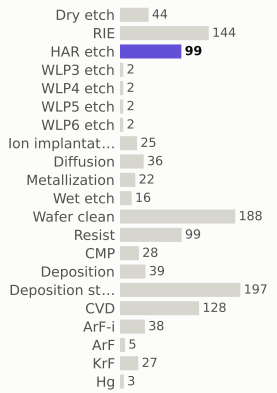

materials deposited (g)

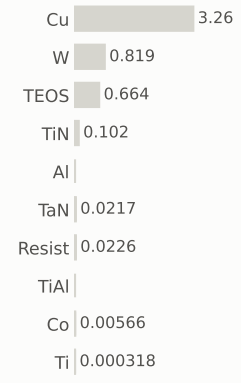

gases emitted (g)

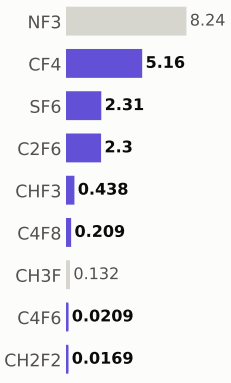

Step #20170: HAR_etch

etch_multi_offset · HAR_etch

1.04	1,064.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	HAR_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

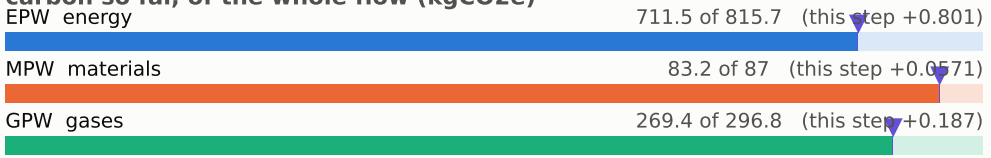

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

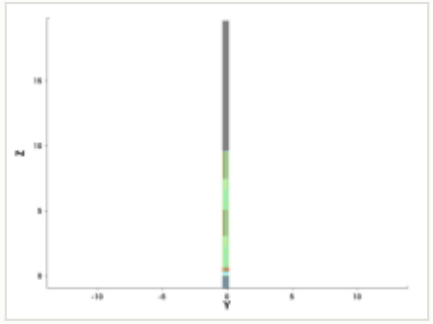

y cut at -0.150 µm

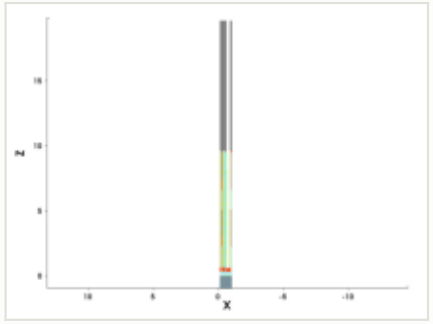

mask for this step

no mask for this step

steps by process area

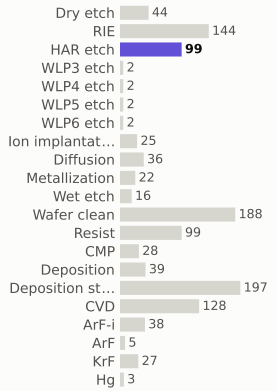

materials deposited (g)

gases emitted (g)

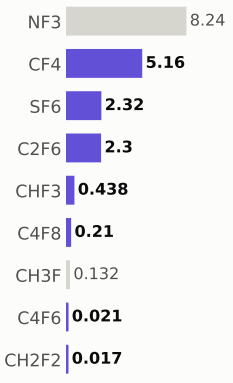

Step #20180: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	1,064.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions

carbon so far, of the whole flow (kgCO2e)

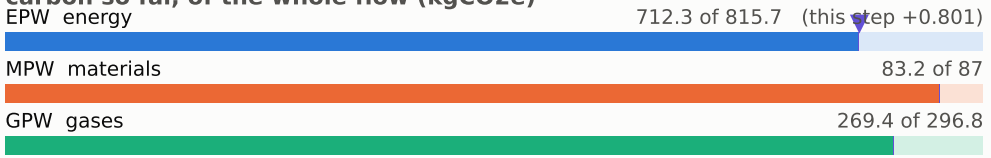

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

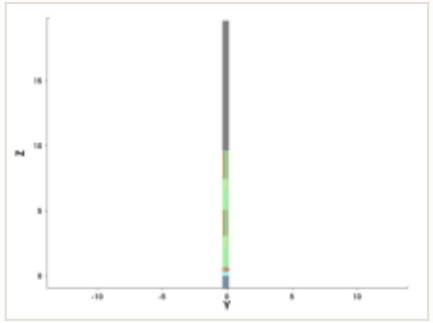

y cut at -0.150 µm

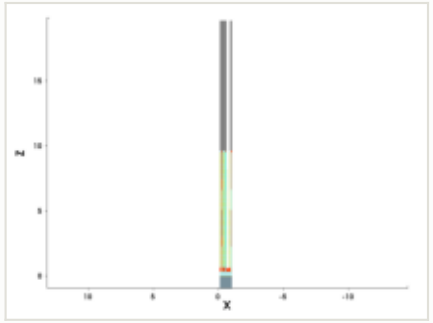

mask for this step

no mask for this step

steps by process area

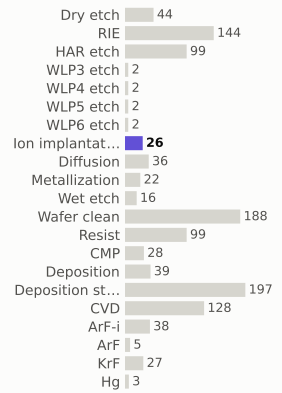

materials deposited (g)

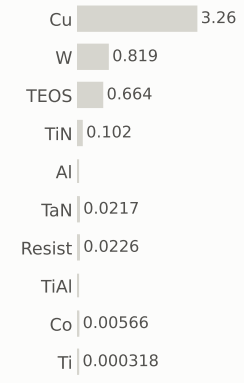

gases emitted (g)

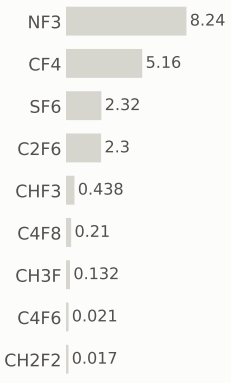

Step #20190: Dry_etch

etch_strip · Dry_etch

0.801	1,065.7	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

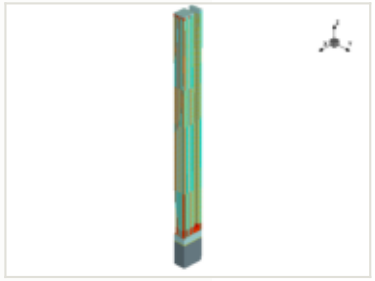

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

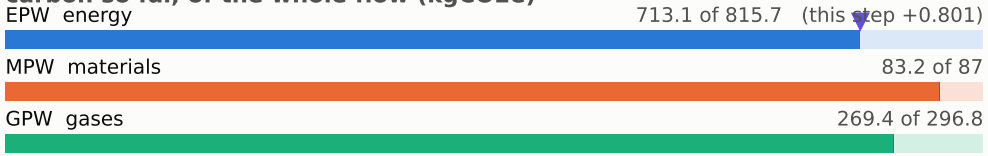

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

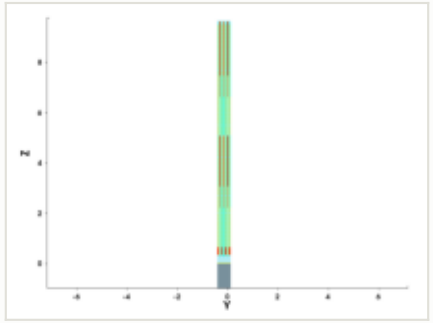

y cut at -0.150 µm

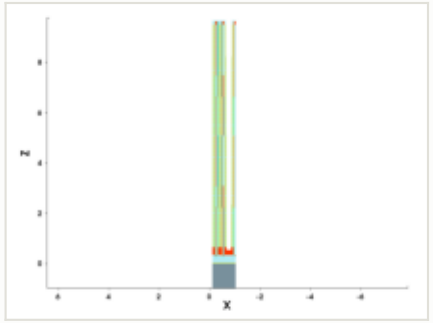

mask for this step

no mask for this step

steps by process area

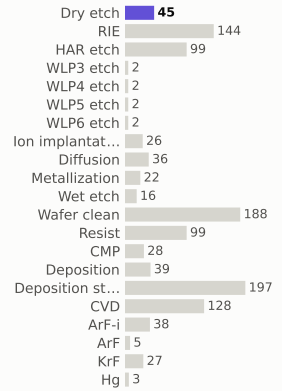

materials deposited (g)

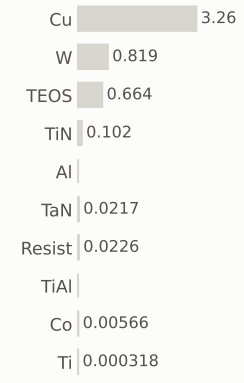

gases emitted (g)

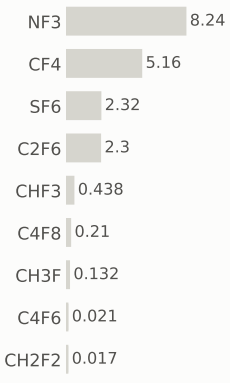

Step #20200: Wafer_clean

clean · Wafer_clean

0.169	1,065.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

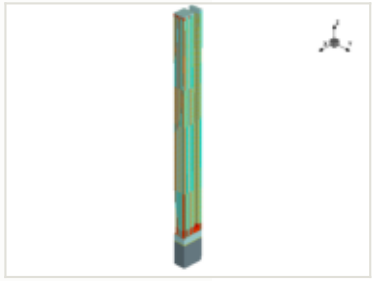

x cut at -0.570 µm

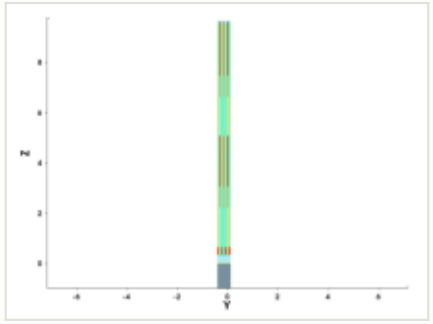

y cut at -0.150 µm

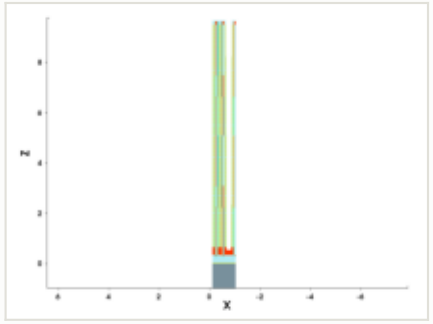

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

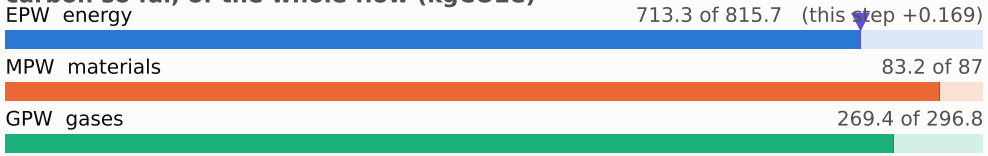

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

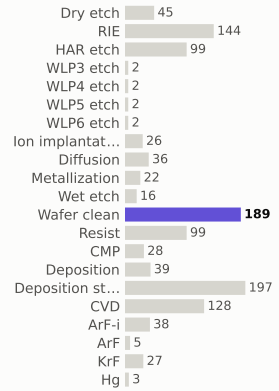

materials deposited (g)

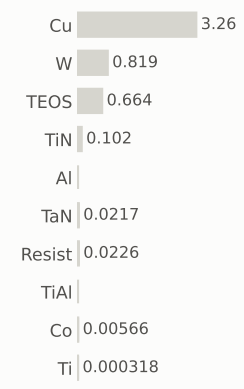

gases emitted (g)



Step #20210: Wet_etch

etch_isotropic · Wet_etch

0.169	1,066.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

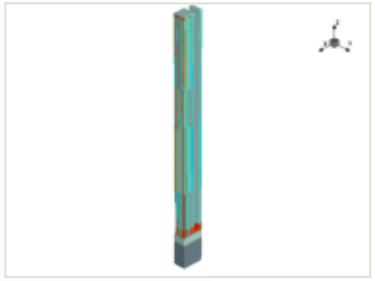

this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

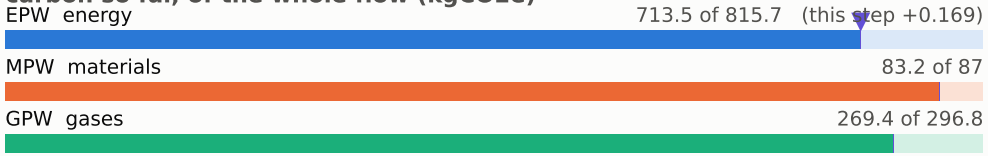

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

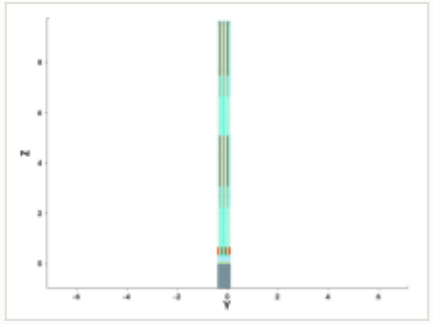

y cut at -0.150 µm

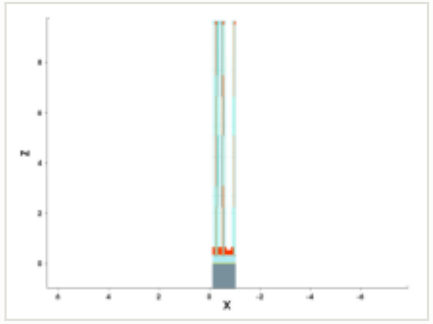

mask for this step

no mask for this step

steps by process area

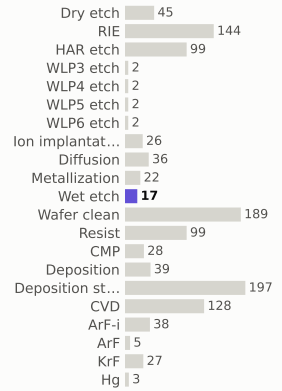

materials deposited (g)

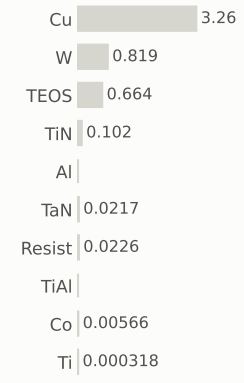

gases emitted (g)

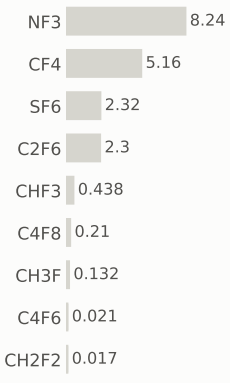

Step #20220: Spx_only

etch_isotropic · Spx_only

0	1,066.1	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

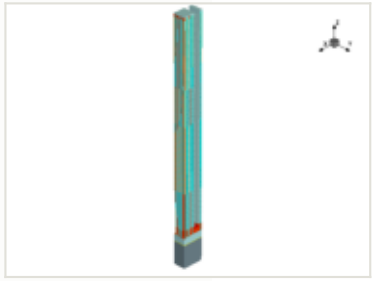

x cut at -0.570 µm

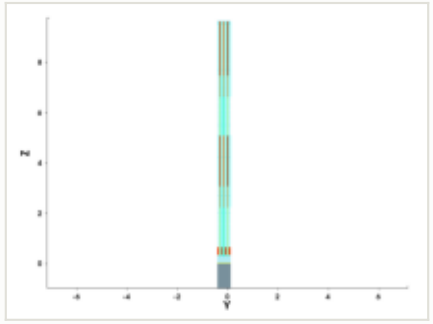

y cut at -0.150 µm

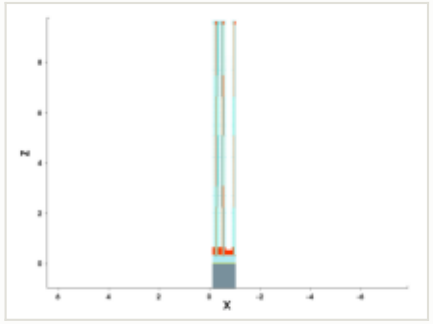

mask for this step

no mask for this step

this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

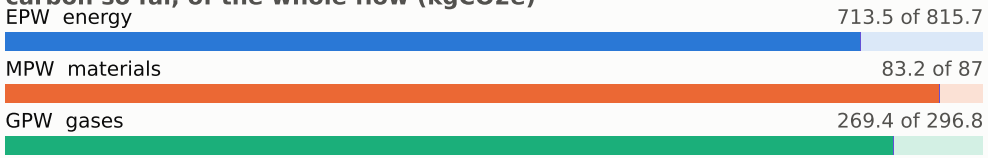

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

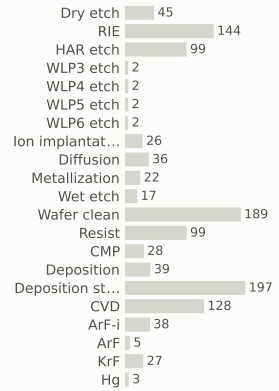

materials deposited (g)

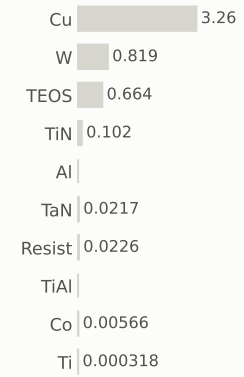

gases emitted (g)

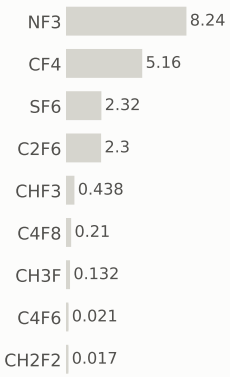

Step #20230: Diffusion

depo_isotropic · Diffusion

0.801	1,066.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

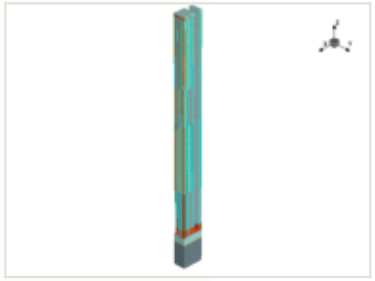

this step

process area	Diffusion
material	—
thickness	0.03 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

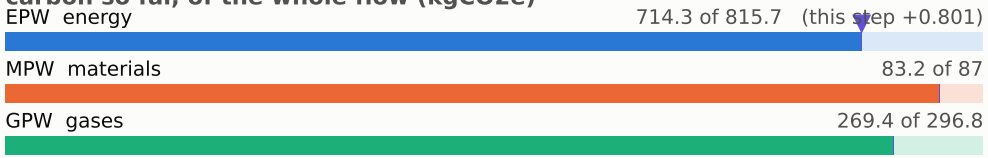

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

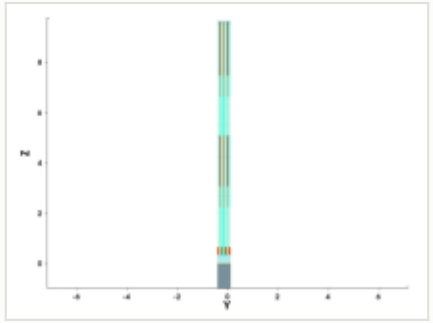

y cut at -0.150 µm

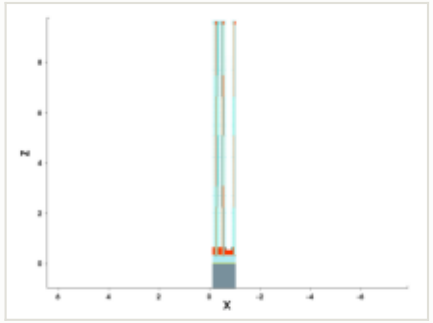

mask for this step

no mask for this step

steps by process area

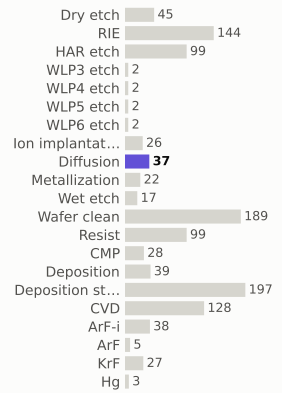

materials deposited (g)

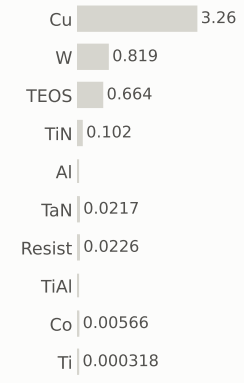

gases emitted (g)

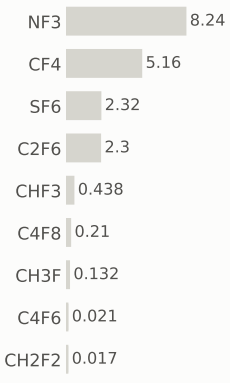

Step #20240: Deposition

depo_isotropic · Deposition

0.656	1,067.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

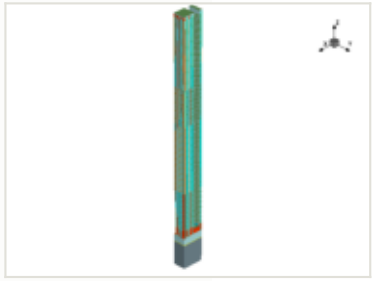

this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.002 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

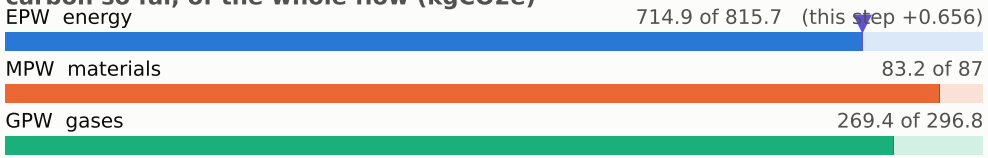

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

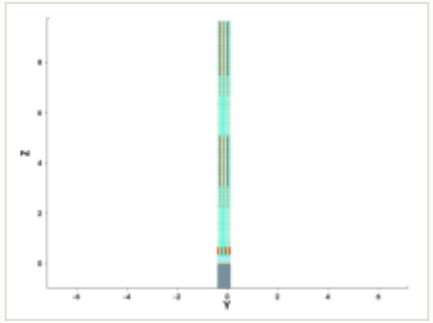

y cut at -0.150 µm

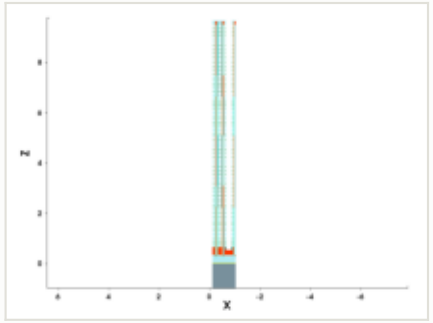

mask for this step

no mask for this step

steps by process area

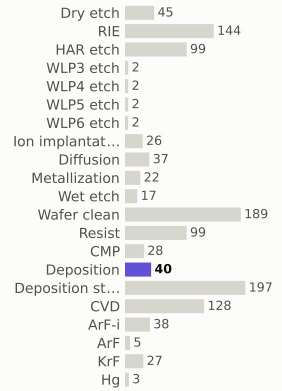

materials deposited (g)

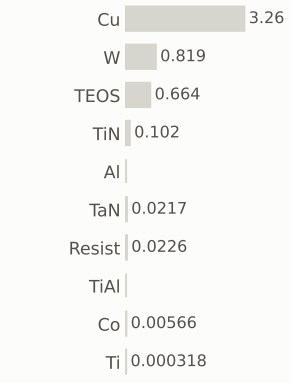

gases emitted (g)

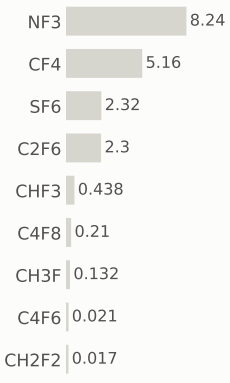

Step #20250: Diffusion

anneal · Diffusion

0.801	1,068.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

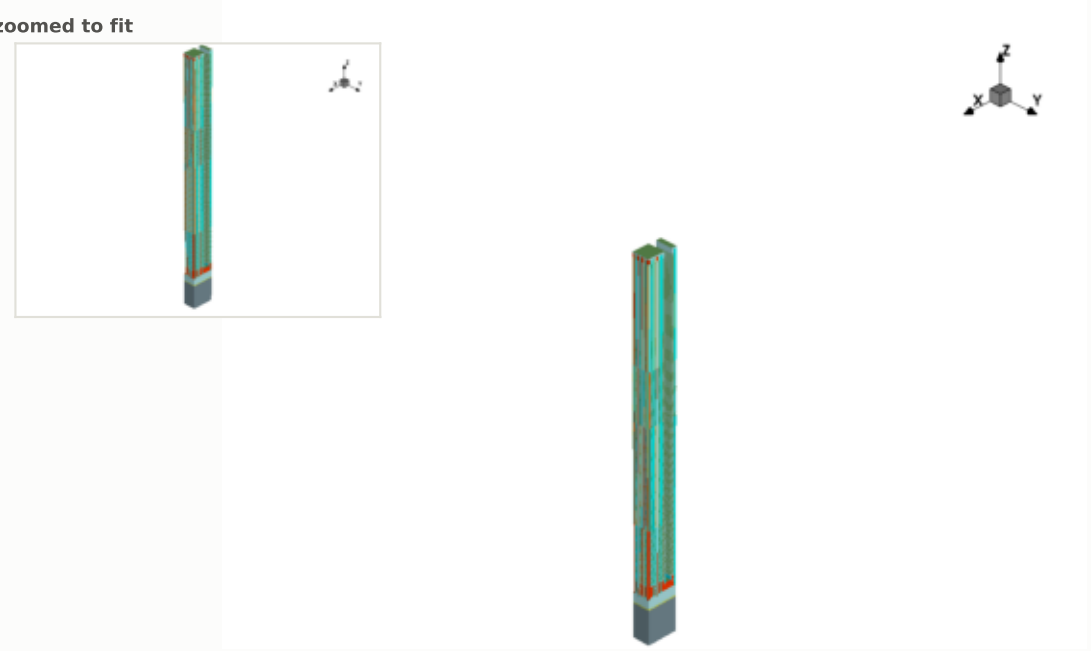

x cut at -0.570 µm

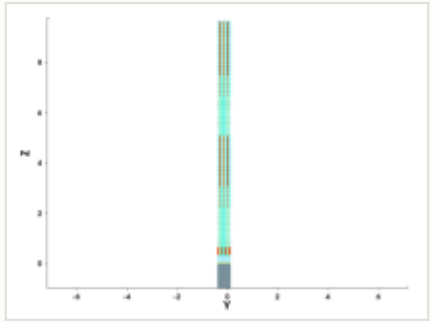

y cut at -0.150 µm

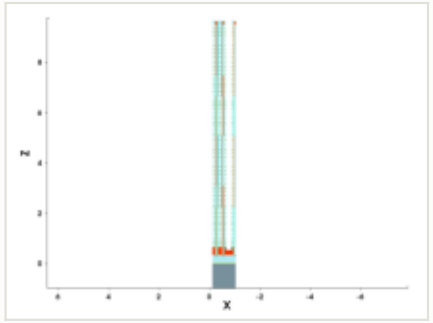

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

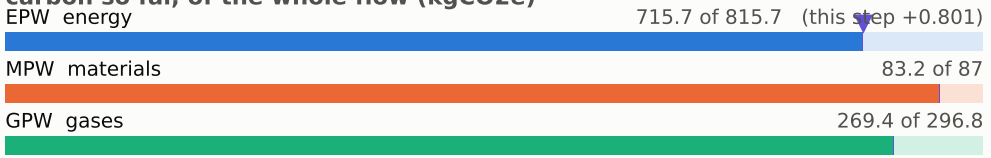

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

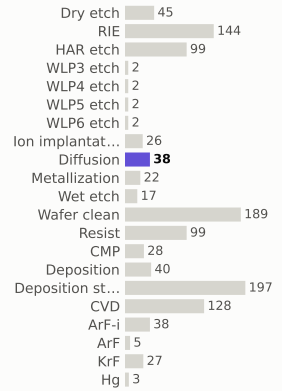

materials deposited (g)



gases emitted (g)

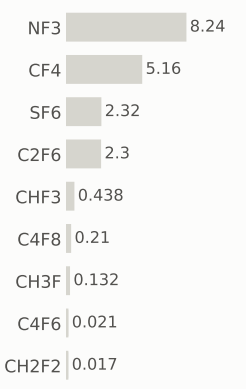

Step #20260: Deposition

depo_isotropic · Deposition

0.656	1,069.0	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

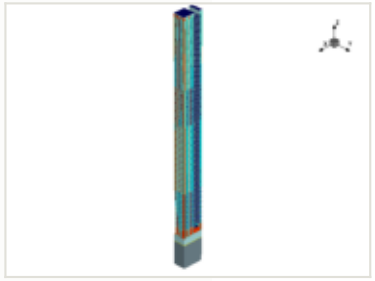

x cut at -0.570 µm

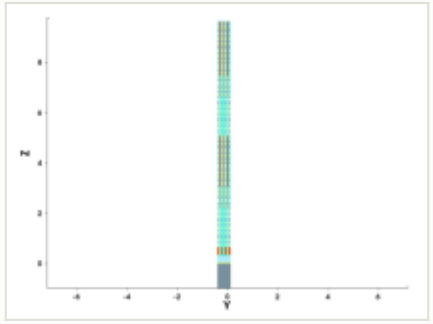

y cut at -0.150 µm

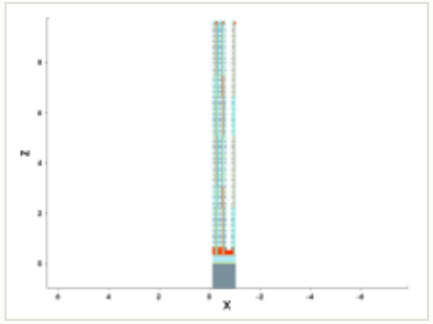

mask for this step

no mask for this step

this step

process area	Deposition
material	TiN
thickness	0.002 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	3.24e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

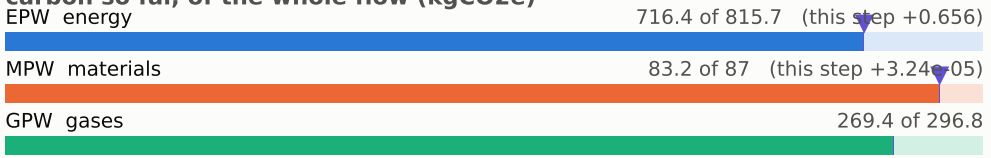

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

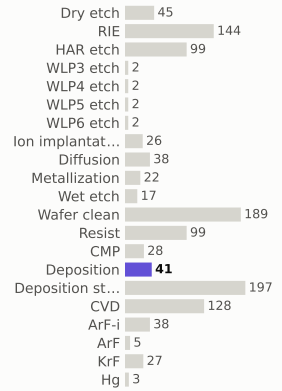

materials deposited (g)

gases emitted (g)



Step #20270: Metallization

depo_isotropic · Metallization

1.21	1,070.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

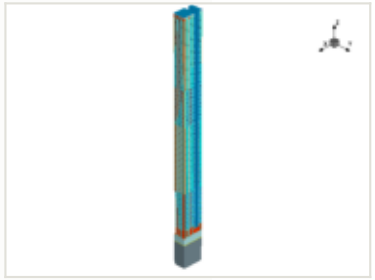

x cut at -0.570 µm

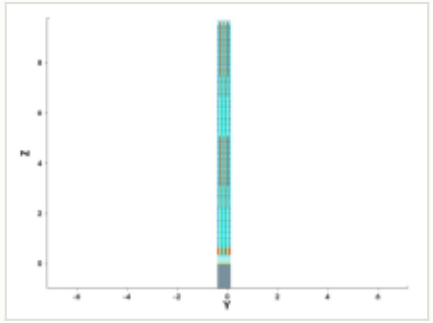

y cut at -0.150 µm

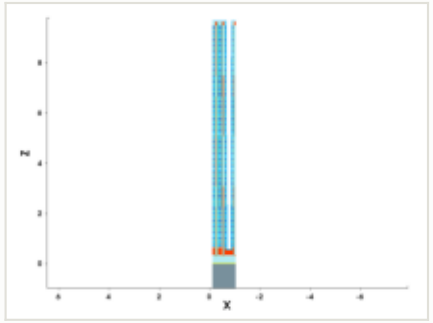

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.02 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00207 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

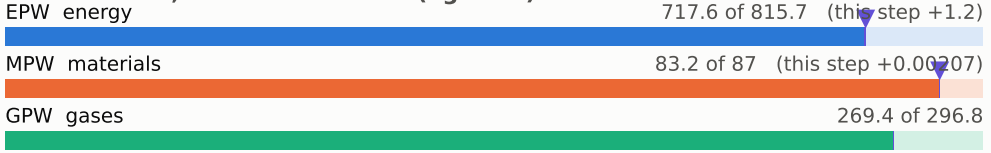

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

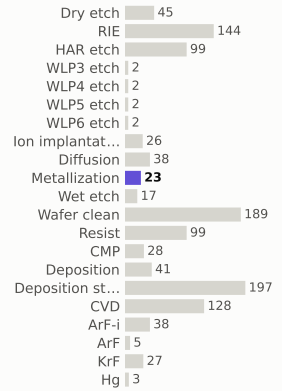

materials deposited (g)



gases emitted (g)

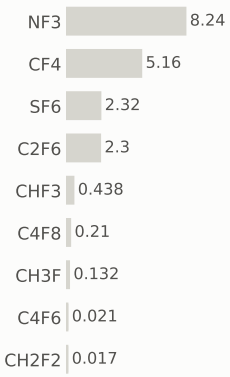

Step #20280: RIE

etch_isotropic · RIE

1.04	1,071.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

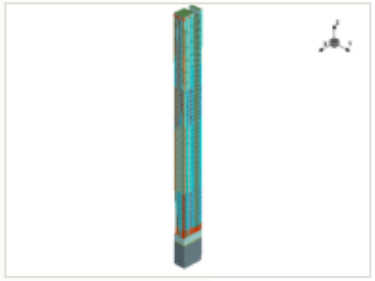

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

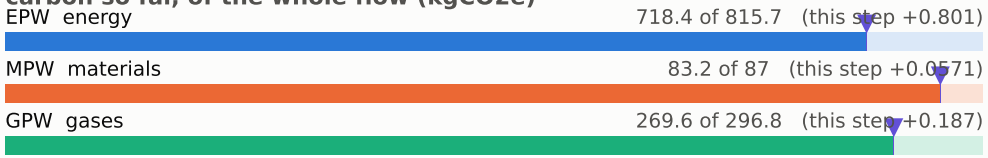

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

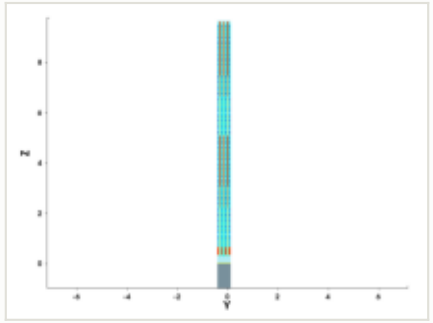

y cut at -0.150 µm

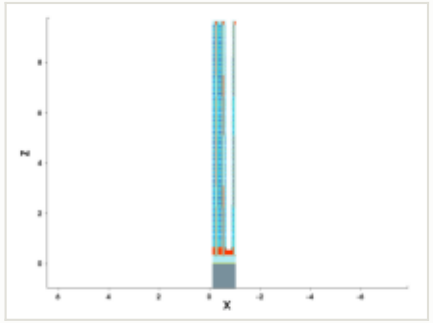

mask for this step

no mask for this step

steps by process area

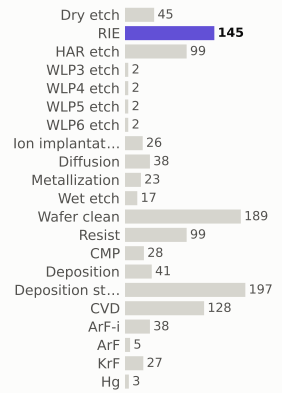

materials deposited (g)

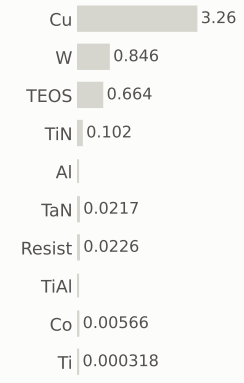

gases emitted (g)

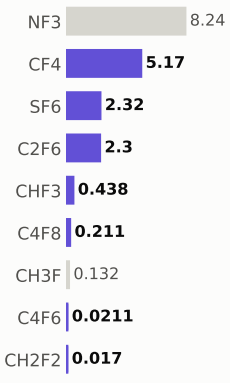

Step #20290: Deposition

depo_isotropic · Deposition

0.656	1,071.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

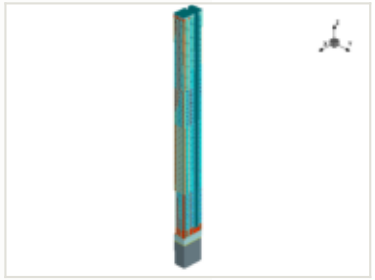

this step

process area	Deposition
material	—
thickness	0.045 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

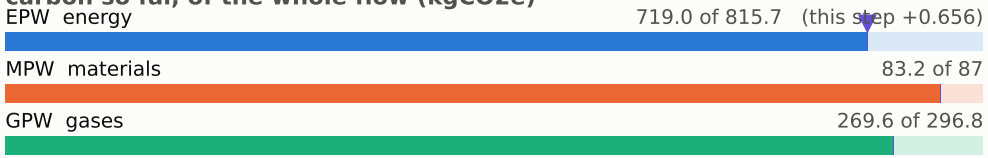

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

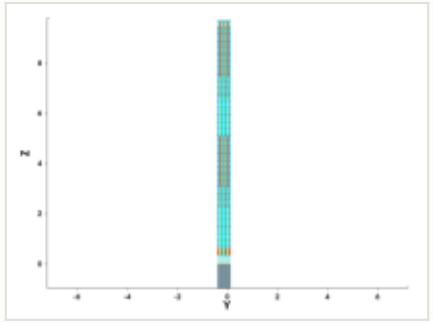

y cut at -0.150 µm

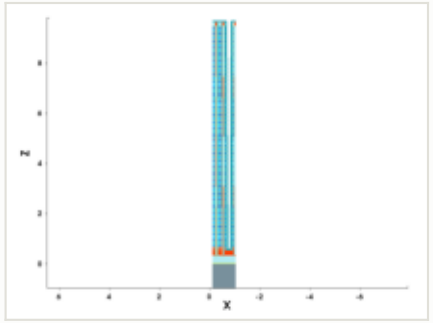

mask for this step

no mask for this step

steps by process area

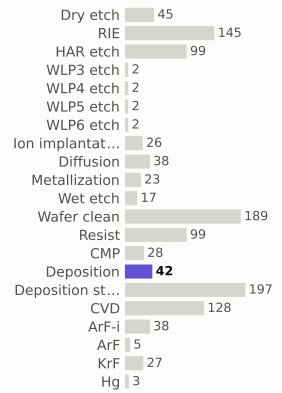

materials deposited (g)

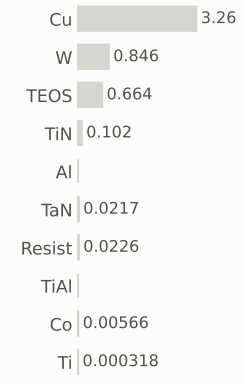

gases emitted (g)

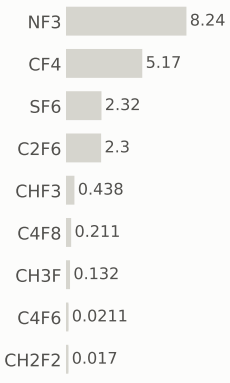

Step #20300: RIE

etch_multi_offset · RIE

1.04	1,072.9	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

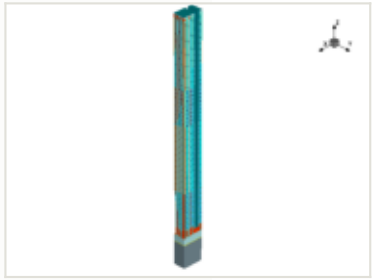

x cut at -0.570 µm

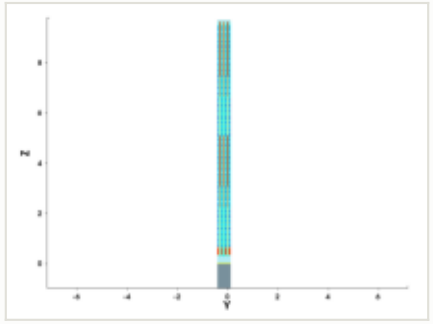

y cut at -0.150 µm

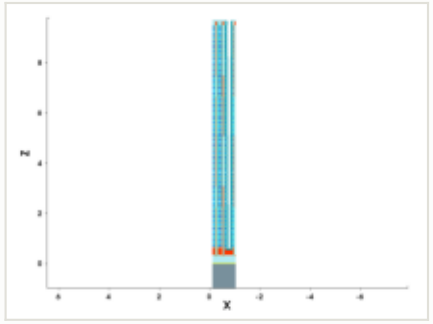

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

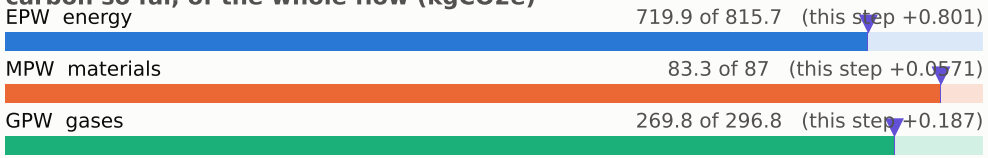

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

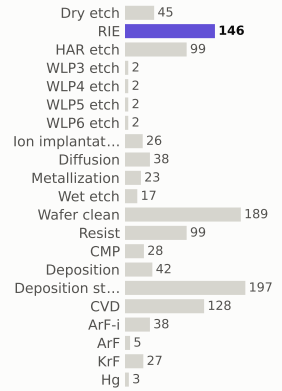

materials deposited (g)

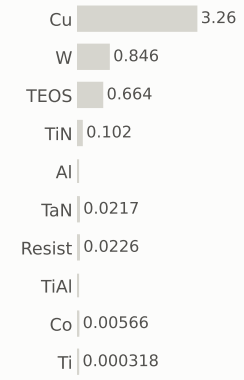

gases emitted (g)

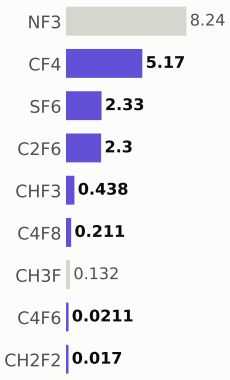

Step #20310: RIE

etch_isotropic · RIE

1.04	1,074.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

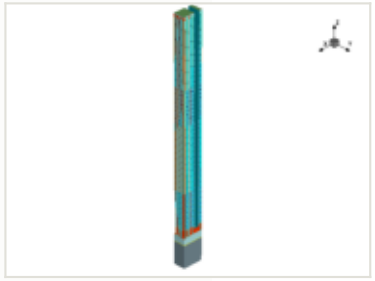

x cut at -0.570 µm

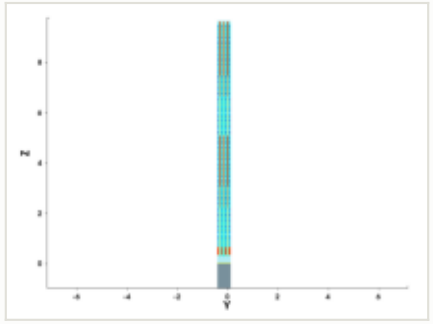

y cut at -0.150 µm

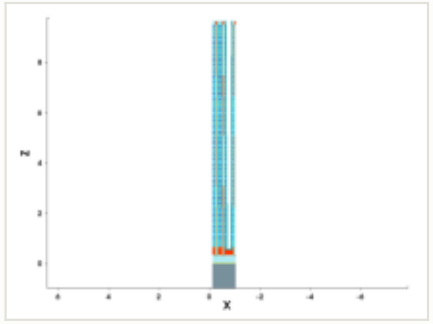

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

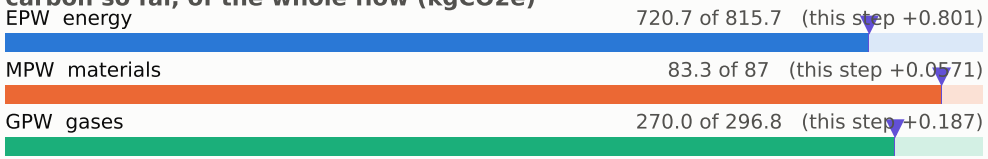

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

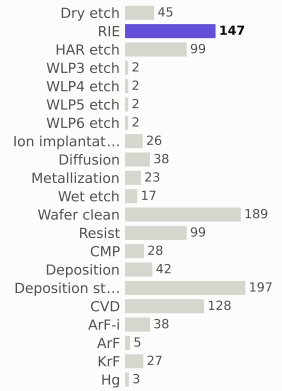

materials deposited (g)

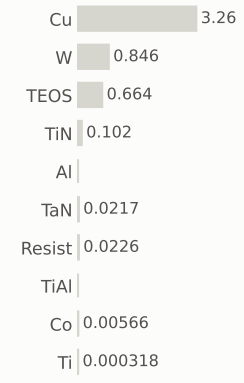

gases emitted (g)

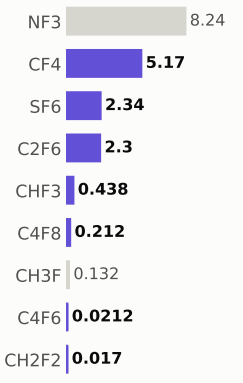

Step #20320: RIE

etch_anisotropic · RIE

1.04	1,075.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

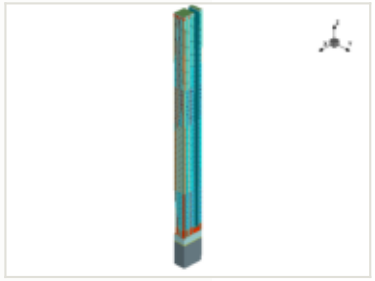

x cut at -0.570 µm

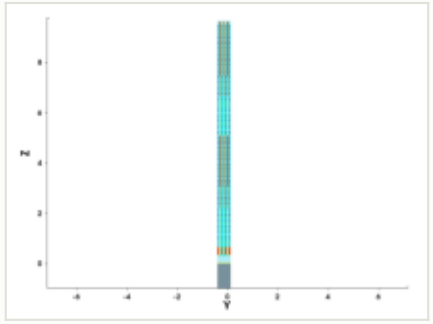

y cut at -0.150 µm

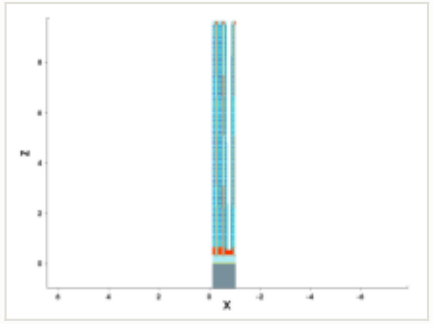

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

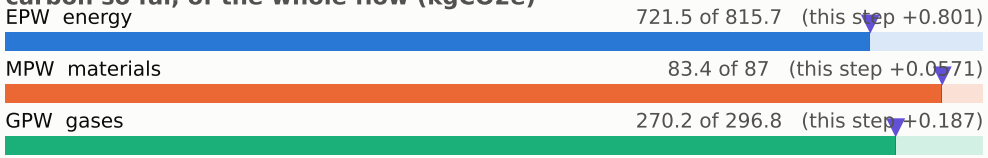

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

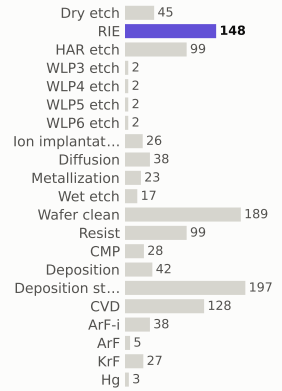

materials deposited (g)

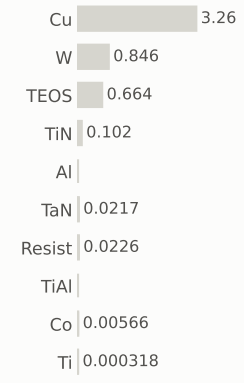

gases emitted (g)

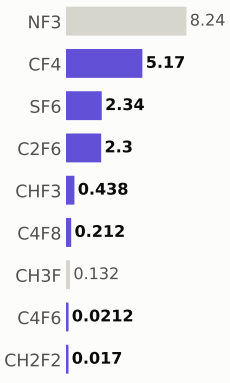

Step #20330: RIE

etch_anisotropic · RIE

1.04	1,076.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

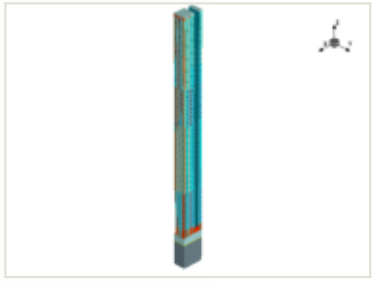

x cut at -0.570 µm

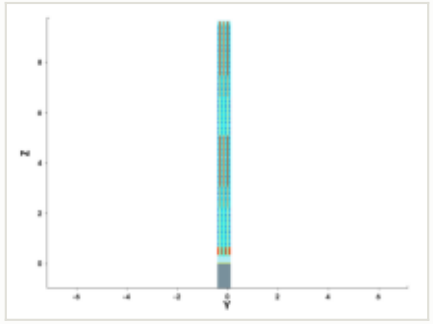

y cut at -0.150 µm

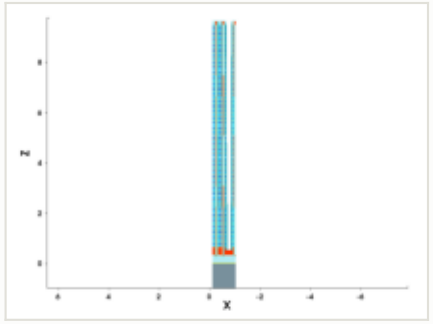

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

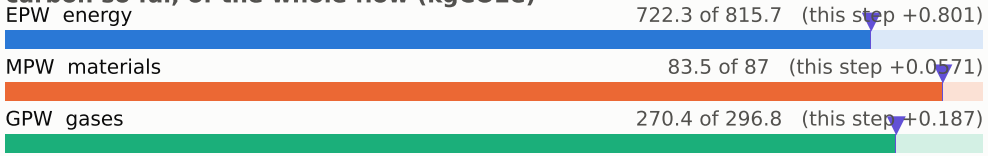

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

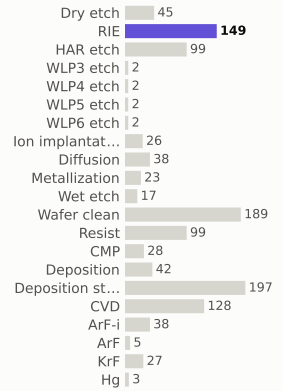

materials deposited (g)

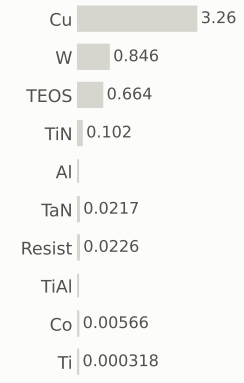

gases emitted (g)

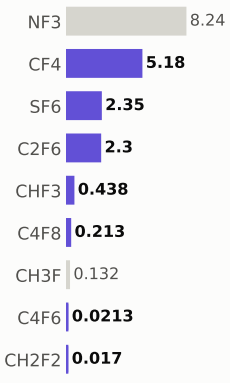

Step #20340: RIE

etch_anisotropic · RIE

1.04	1,077.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

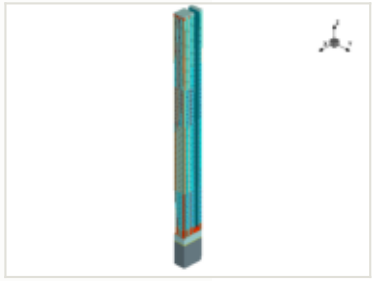

x cut at -0.570 µm

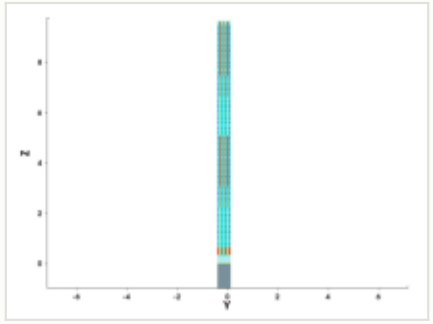

y cut at -0.150 µm

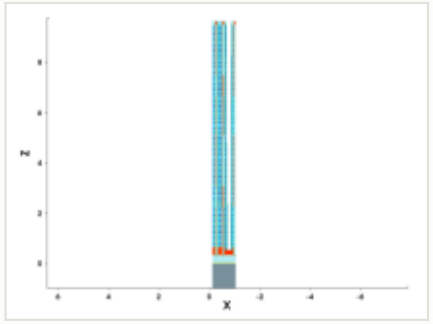

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

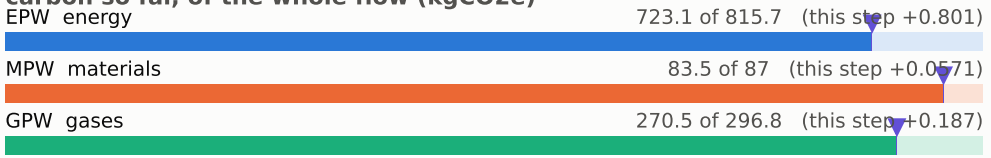

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

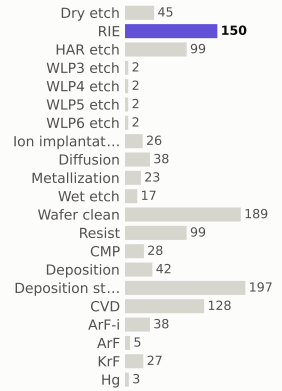

materials deposited (g)

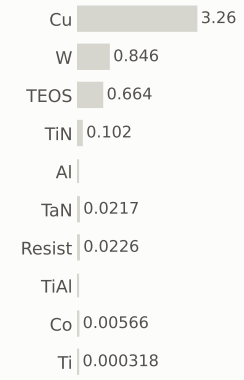

gases emitted (g)

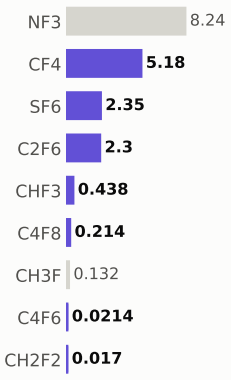

Step #20350: CVD

depo_isotropic · CVD

1.31	1,078.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

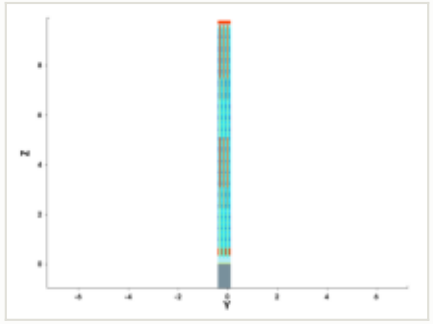

y cut at -0.150 µm

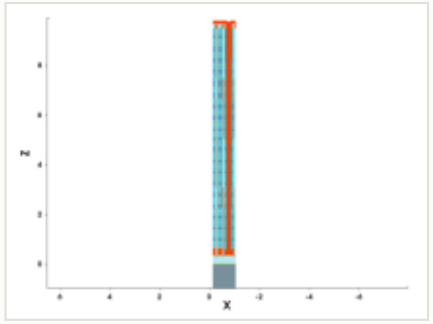

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.14 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

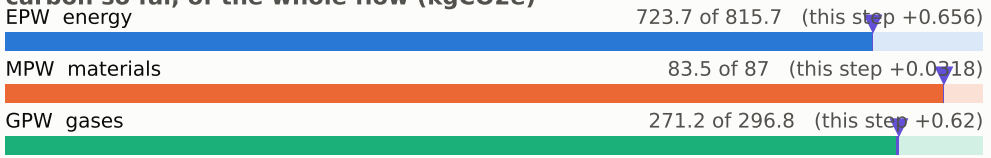

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

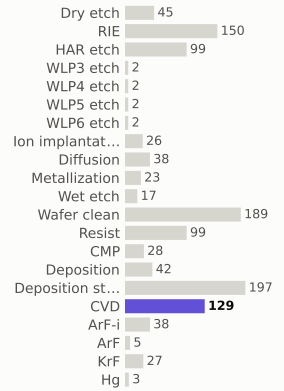

materials deposited (g)

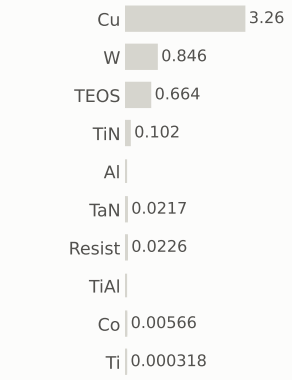

gases emitted (g)

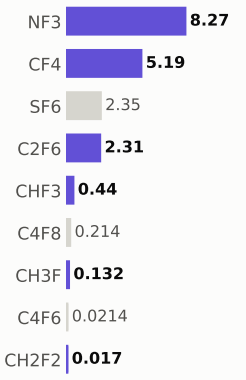

Step #20360: CMP

etch_cmp · CMP

0.169	1,078.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

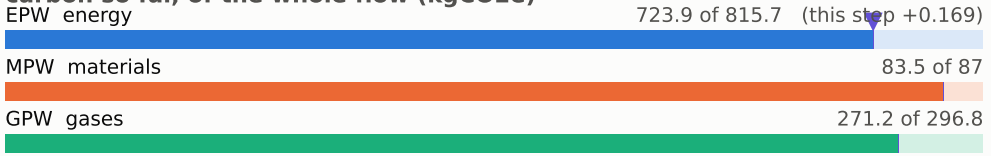

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

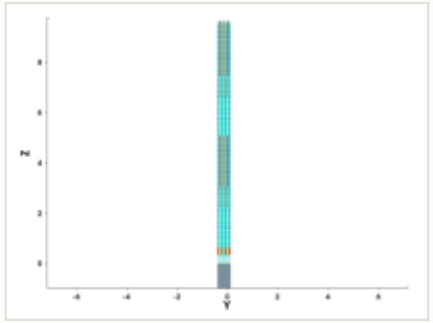

y cut at -0.150 µm

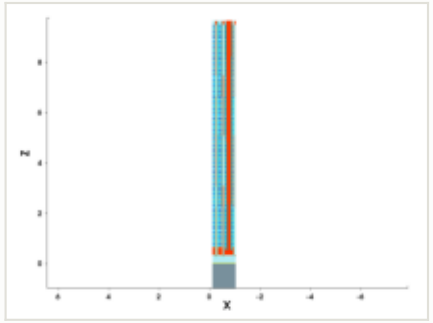

mask for this step

no mask for this step

steps by process area

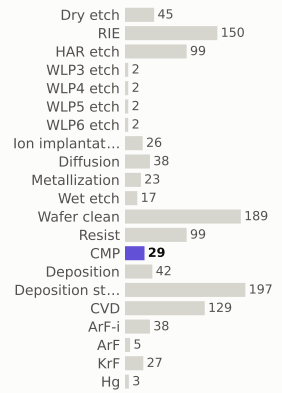

materials deposited (g)

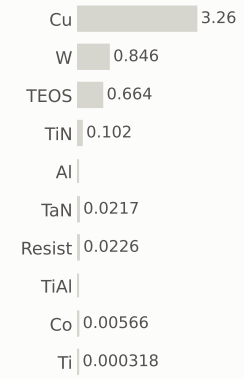

gases emitted (g)

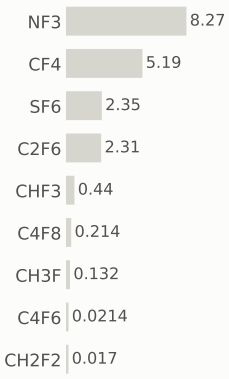

Step #20370: Wafer_clean

clean · Wafer_clean

0.169	1,078.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

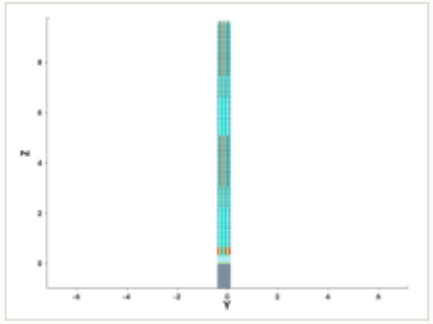

y cut at -0.150 µm

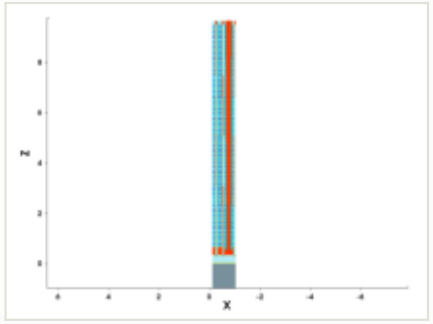

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

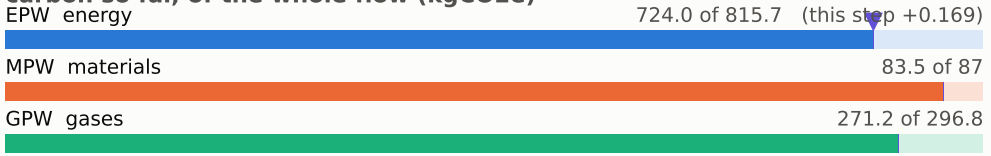

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

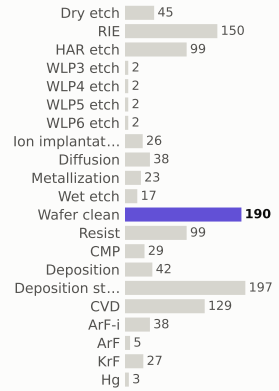

materials deposited (g)

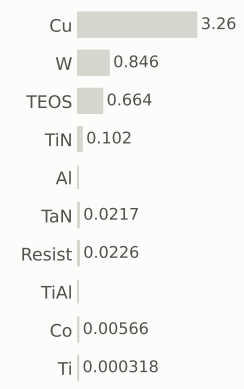

gases emitted (g)

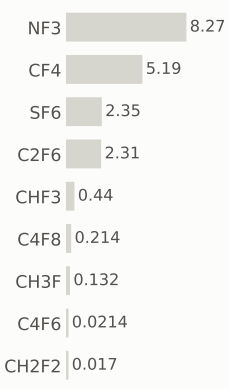

Step #20390: KrF

litho_patterning · KrF

0.199	1,079.0	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

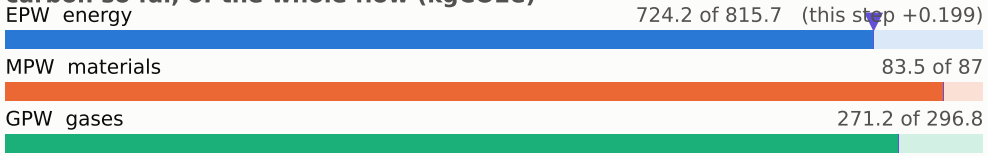

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

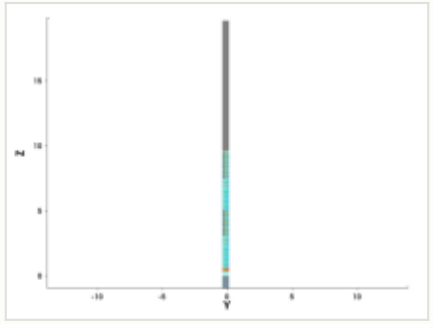

y cut at -0.150 µm

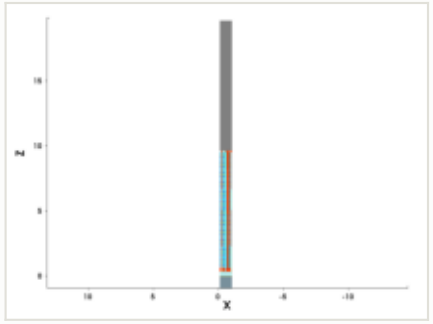

mask: layer 39:0, negative (GDSII)

nothing in the clip window

steps by process area

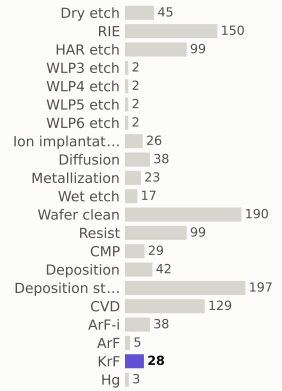

materials deposited (g)



gases emitted (g)



Step #20400: RIE

etch_anisotropic · RIE

1.04	1,080.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

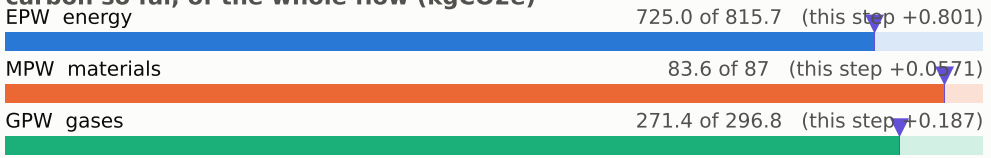

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

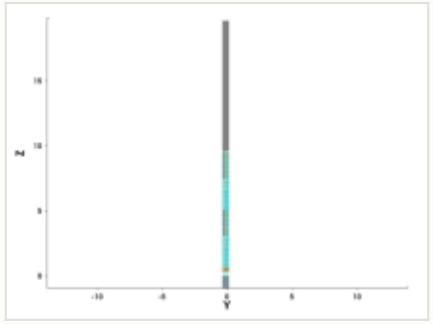

y cut at -0.150 µm

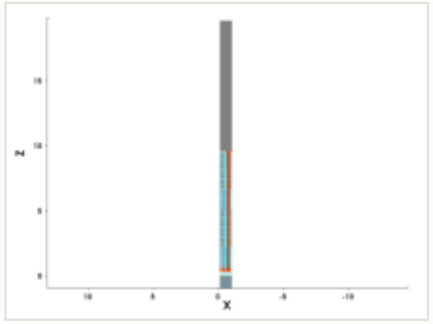

mask for this step

no mask for this step

steps by process area

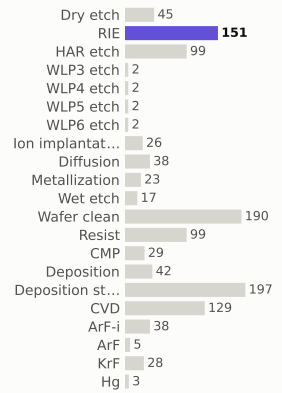

materials deposited (g)

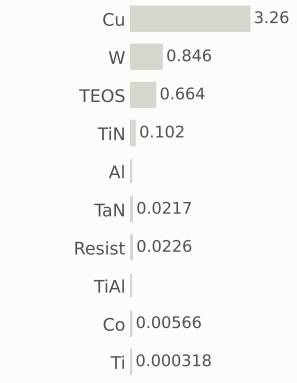

gases emitted (g)

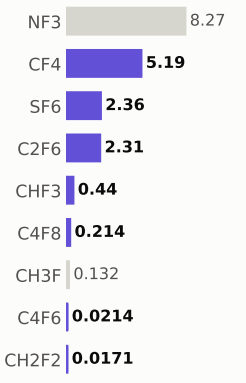

Step #20410: Dry_etch

etch_strip · Dry_etch

0.801	1,080.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

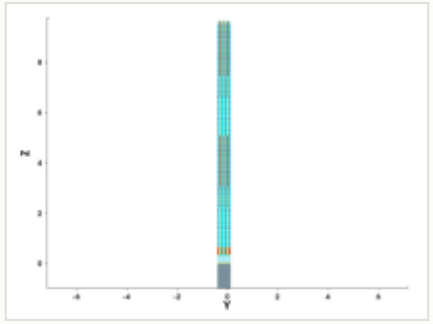

y cut at -0.150 µm

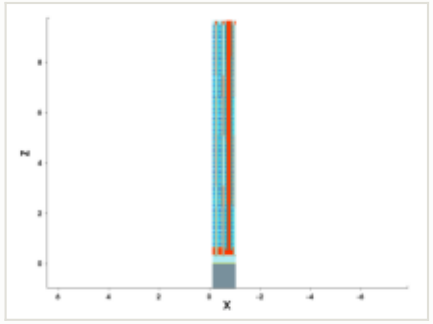

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

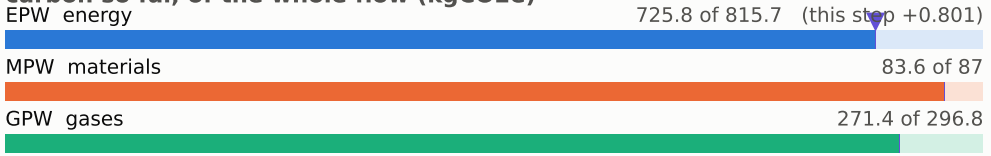

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

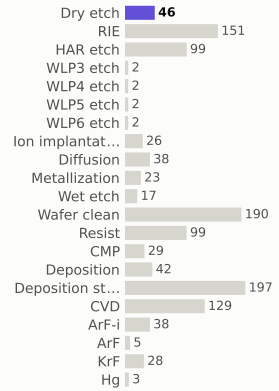

materials deposited (g)

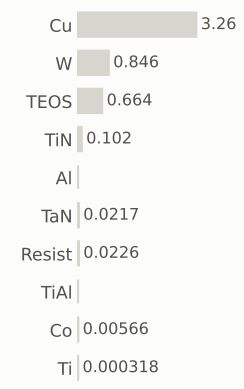

gases emitted (g)

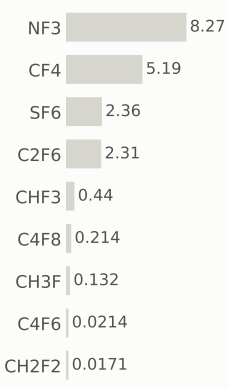

Step #20420: Wafer_clean

clean · Wafer_clean

0.169	1,081.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

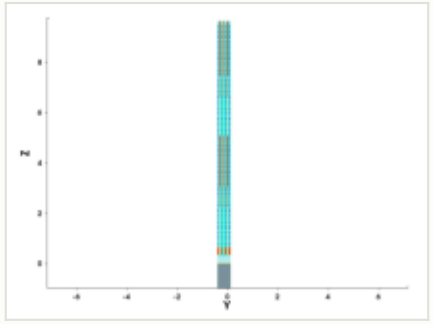

y cut at -0.150 µm

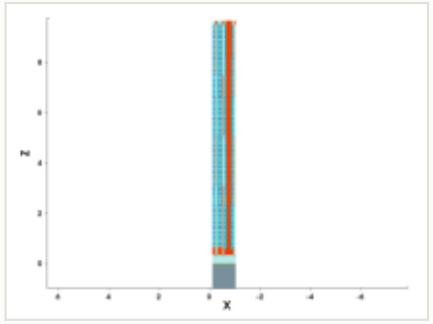

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

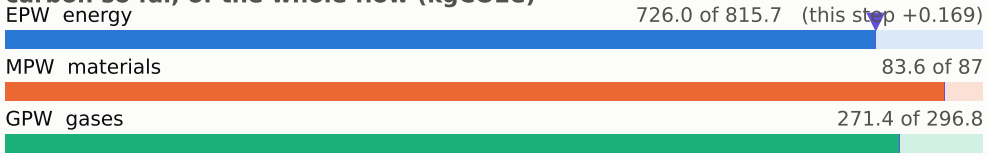

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

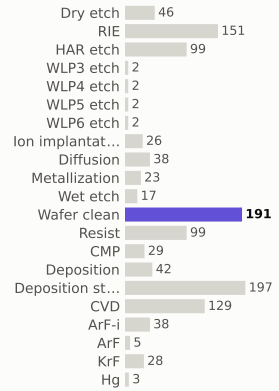

materials deposited (g)

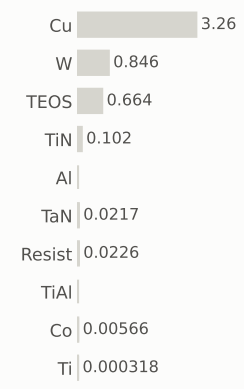

gases emitted (g)

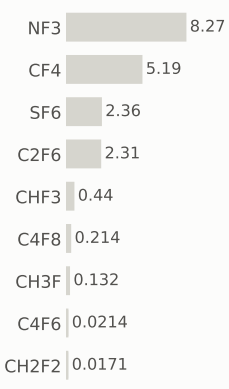

Step #20430: Deposition

depo_isotropic · Deposition

0.656	1,081.6	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

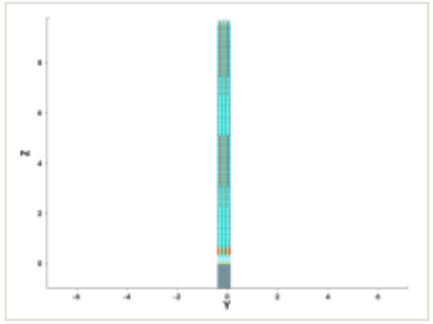

y cut at -0.150 µm

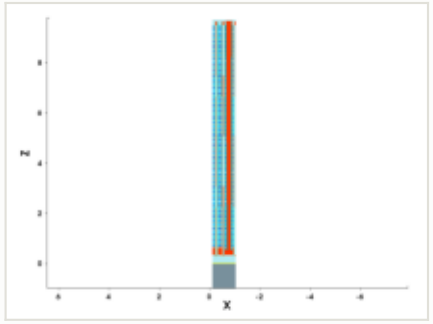

mask for this step

no mask for this step

this step

process area	Deposition
material	—
thickness	0.02 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

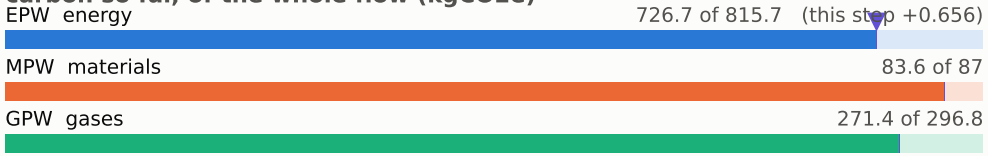

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

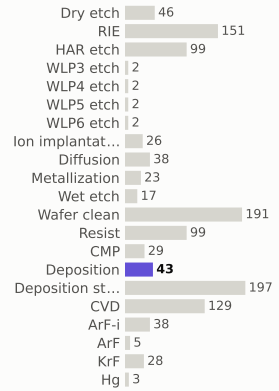

materials deposited (g)

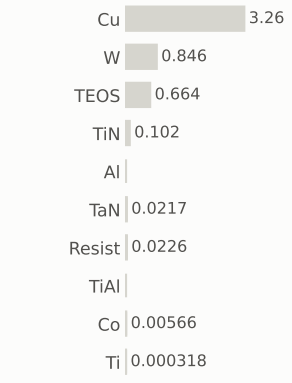

gases emitted (g)

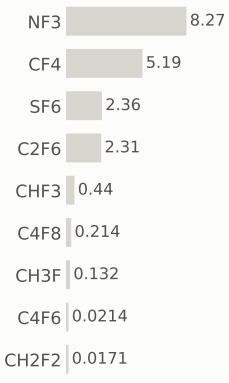

Step #20440: RIE

etch_anisotropic · RIE

1.04	1,082.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

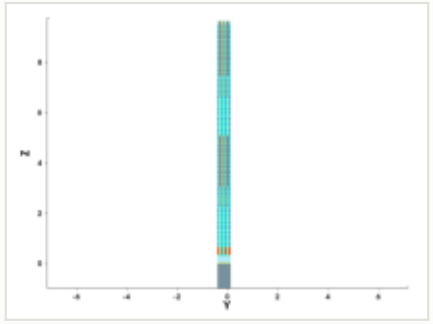

y cut at -0.150 µm

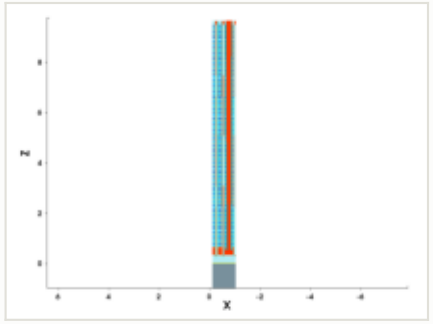

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

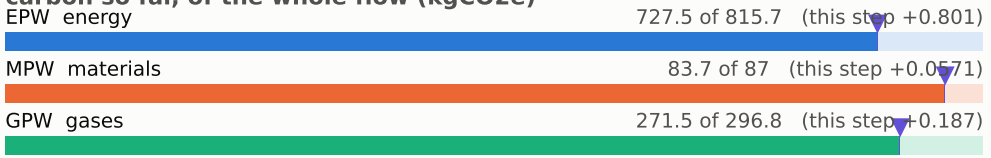

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

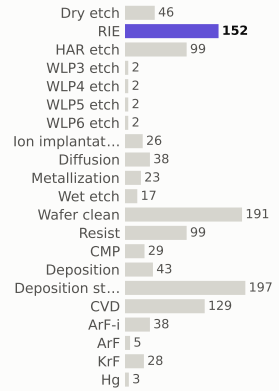

materials deposited (g)

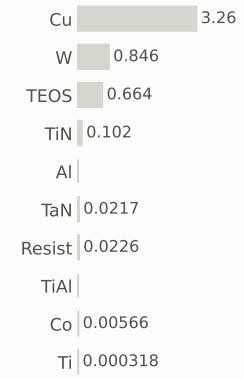

gases emitted (g)

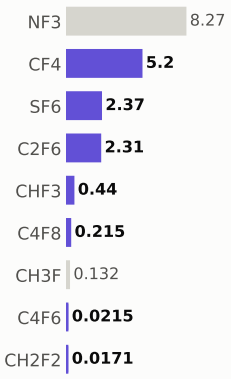

Step #20450: Deposition

depo_isotropic · Deposition

0.656	1,083.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

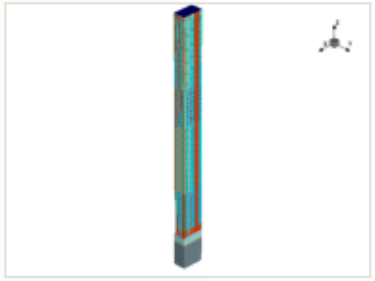

x cut at -0.570 µm

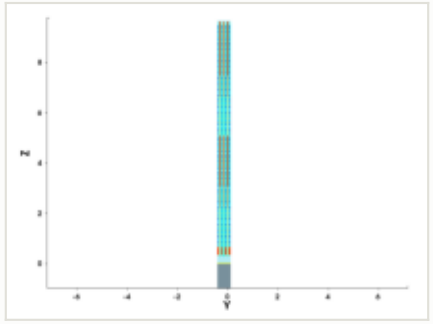

y cut at -0.150 µm

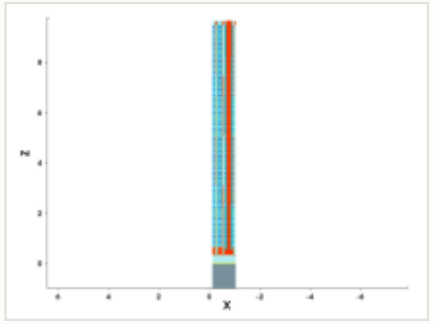

mask for this step

no mask for this step

this step

process area	Deposition
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000162 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

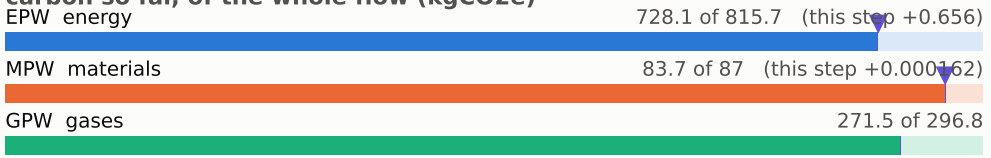

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

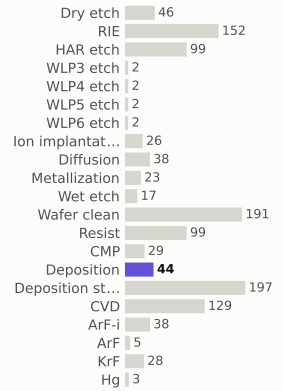

materials deposited (g)

gases emitted (g)

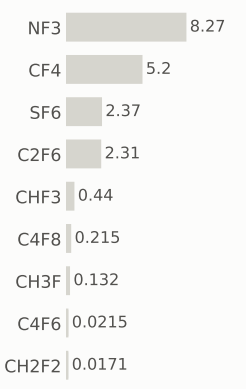

Step #20460: Metallization

depo_isotropic · Metallization

1.23	1,084.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization
material	W
thickness	0.25 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0259 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.23 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

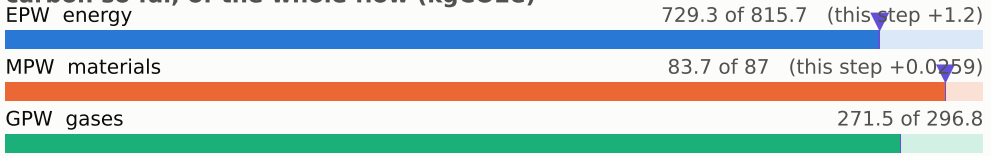

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

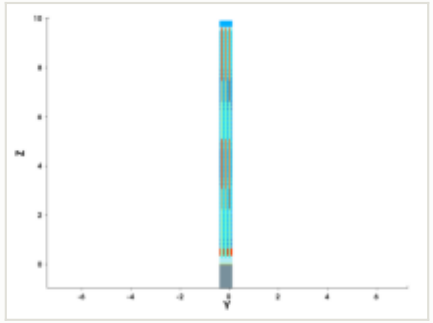

y cut at -0.150 µm

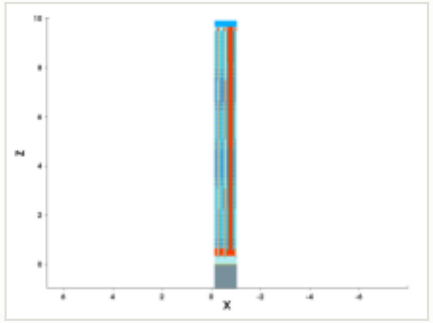

mask for this step

no mask for this step

steps by process area

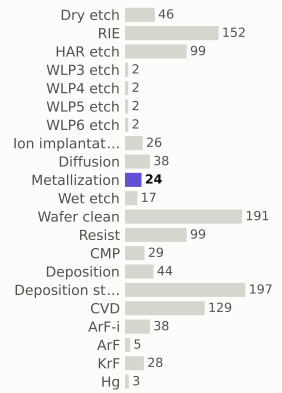

materials deposited (g)

gases emitted (g)

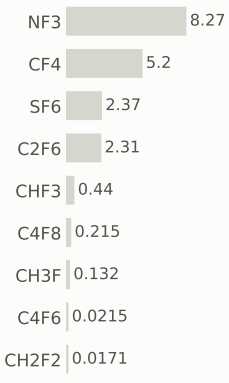

Step #20470: CMP

etch_cmp · CMP

0.169	1,084.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

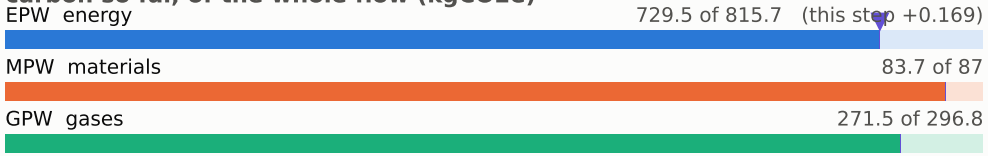

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

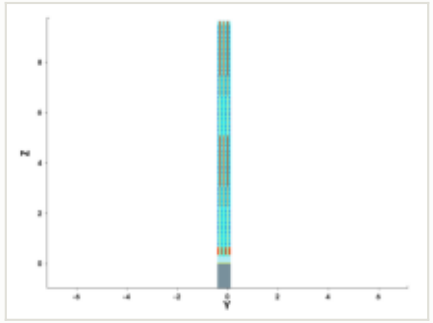

y cut at -0.150 µm

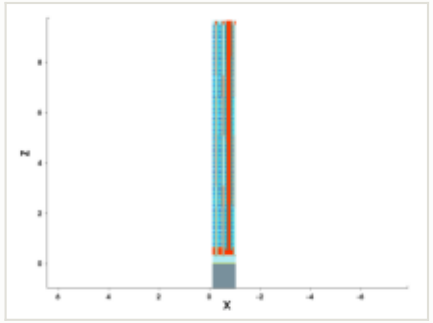

mask for this step

no mask for this step

steps by process area

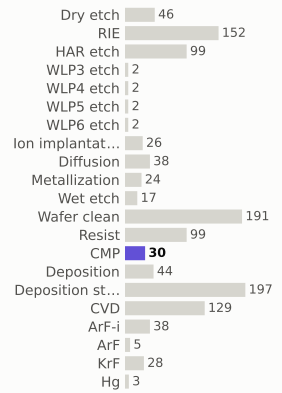

materials deposited (g)

gases emitted (g)

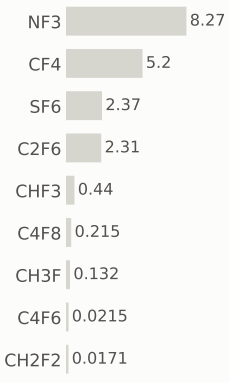

Step #20480: Wafer_clean

clean · Wafer_clean

0.169	1,084.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

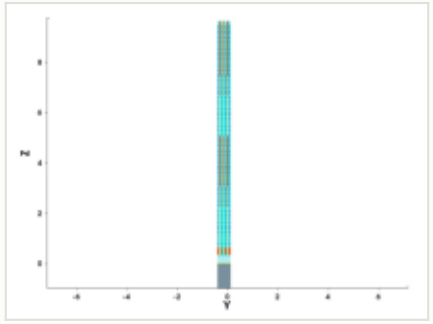

y cut at -0.150 µm

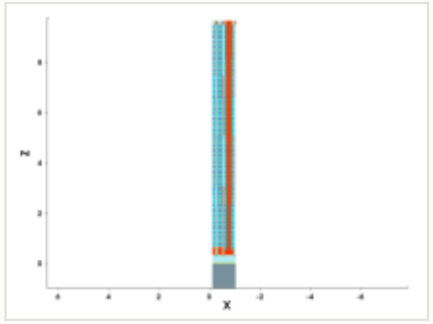

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

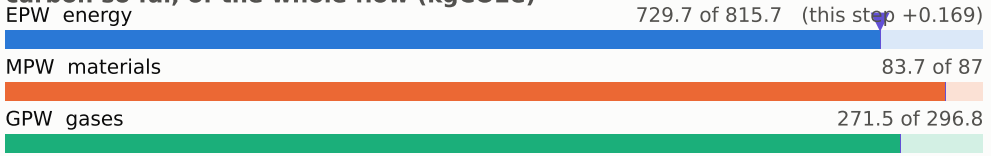

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

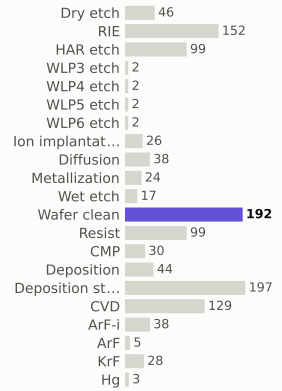

materials deposited (g)



gases emitted (g)

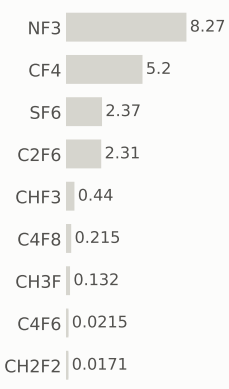

Step #20490: CVD

depo_isotropic · CVD

1.31	1,086.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

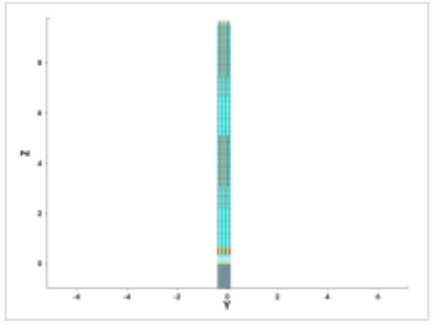

y cut at -0.150 µm

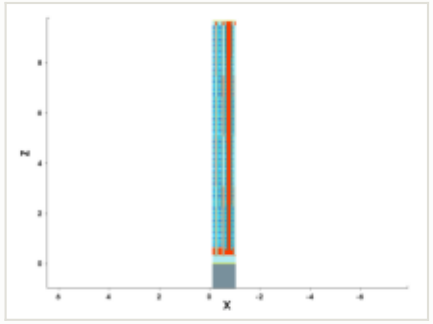

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.027 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

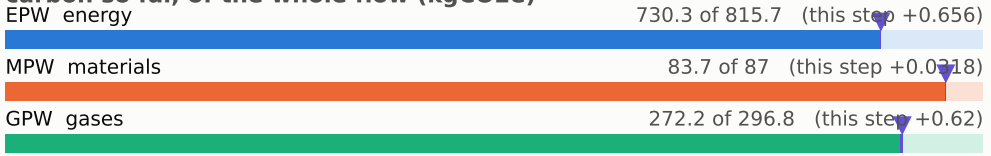

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

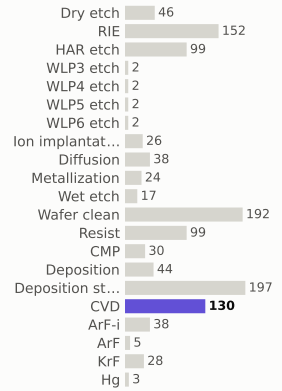

materials deposited (g)

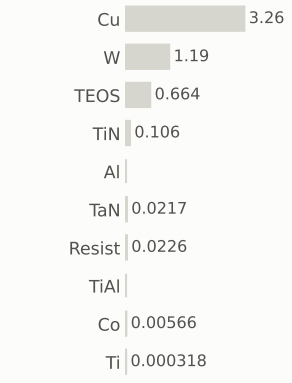

gases emitted (g)

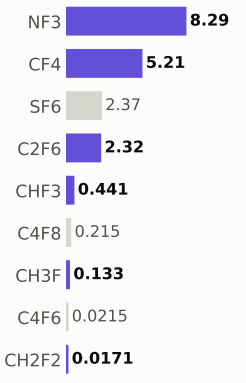

Step #20510: CVD

depo_isotropic · CVD

1.31	1,087.5	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

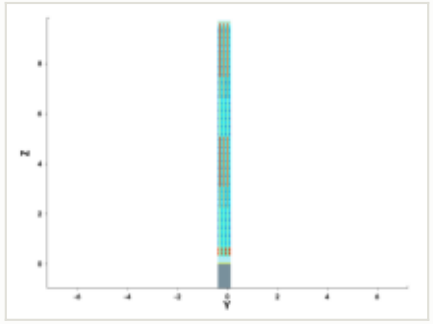

y cut at -0.150 µm

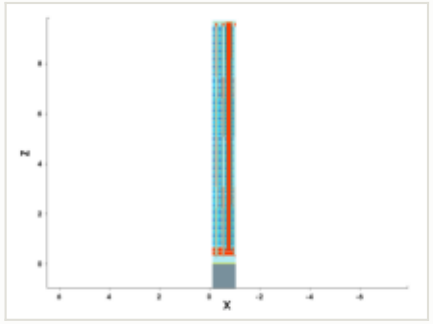

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.045 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

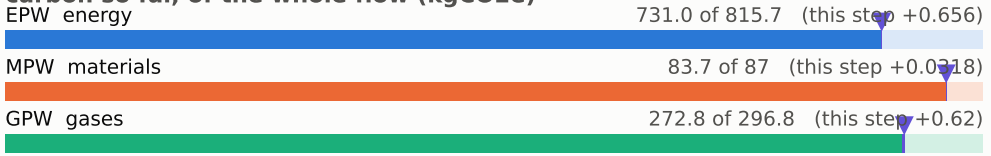

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

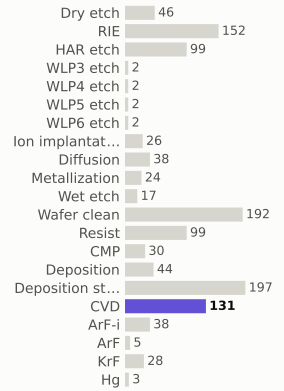

materials deposited (g)

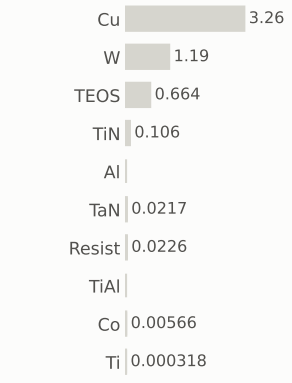

gases emitted (g)

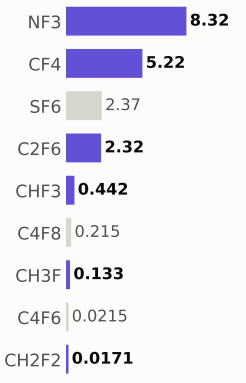

Step #20520: KrF

litho_patterning · KrF

0.199	1,087.7	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

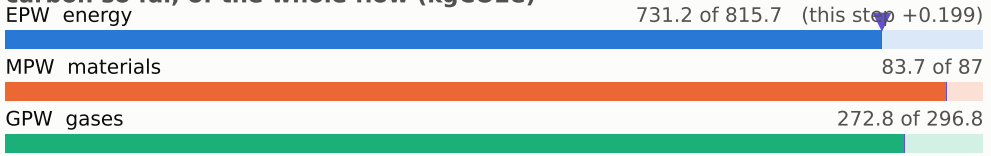

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

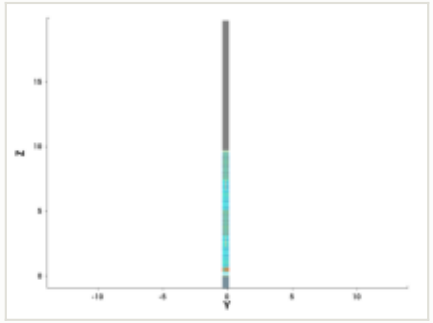

y cut at -0.150 µm

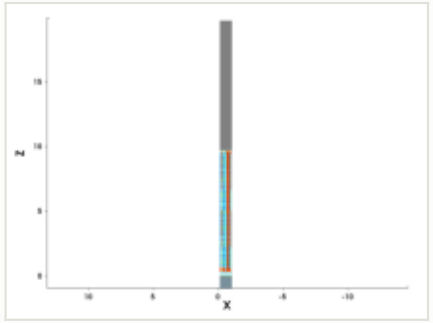

mask: layer 40:0, positive (GDSII)

steps by process area

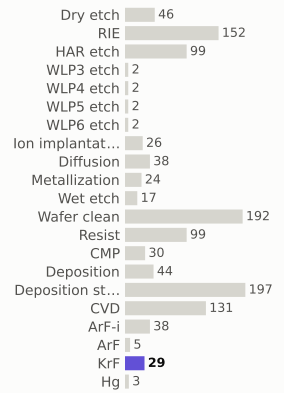

materials deposited (g)

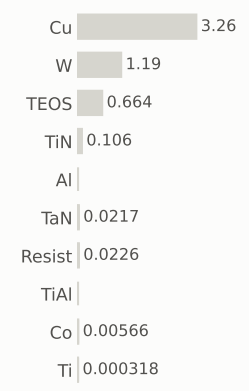

gases emitted (g)

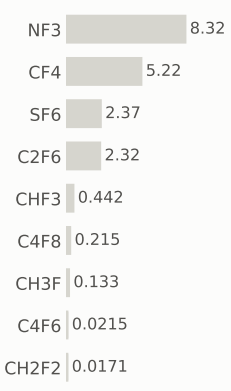

Step #20530: RIE

etch_anisotropic · RIE

1.04	1,088.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

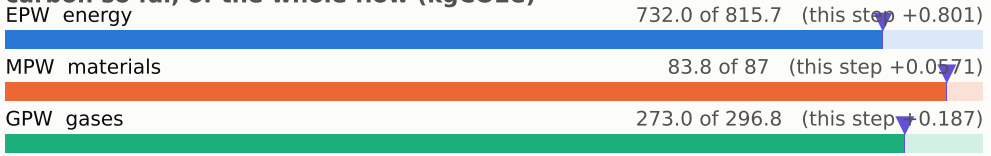

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

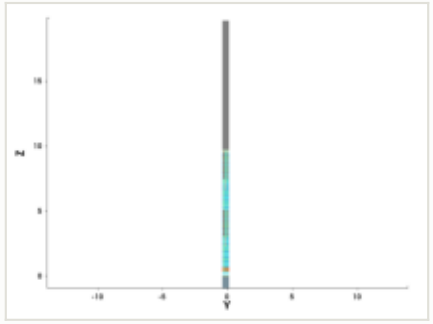

y cut at -0.150 µm

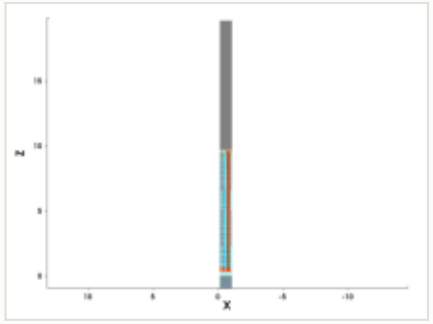

mask for this step

no mask for this step

steps by process area

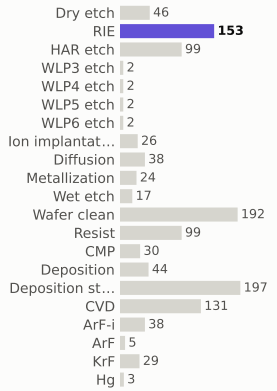

materials deposited (g)

gases emitted (g)

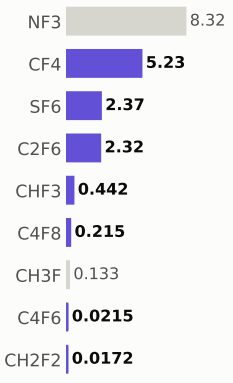

Step #20540: RIE

etch_anisotropic · RIE

1.04	1,089.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

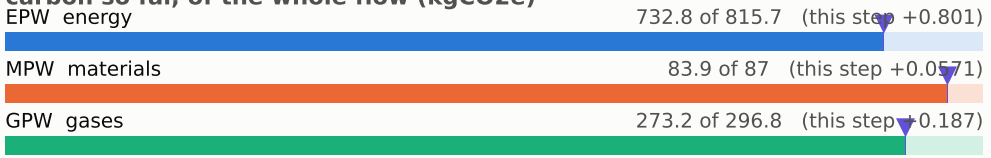

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

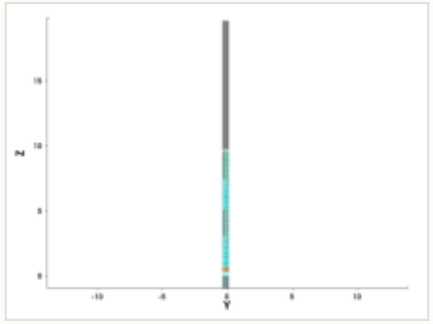

y cut at -0.150 µm

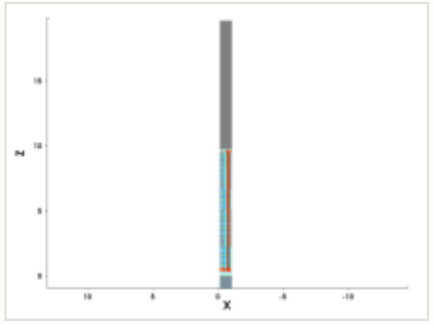

mask for this step

no mask for this step

steps by process area

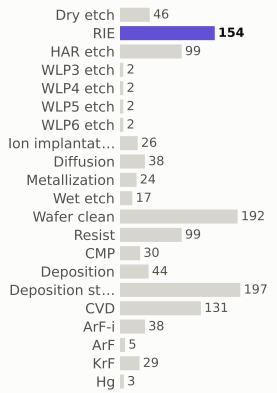

materials deposited (g)

gases emitted (g)

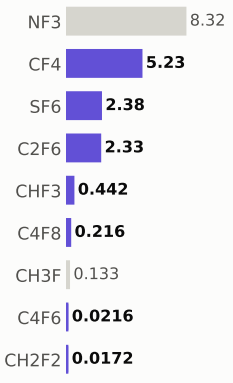

Step #20550: RIE

etch_anisotropic · RIE

1.04	1,090.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

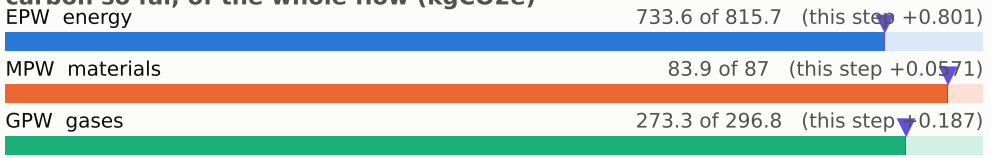

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

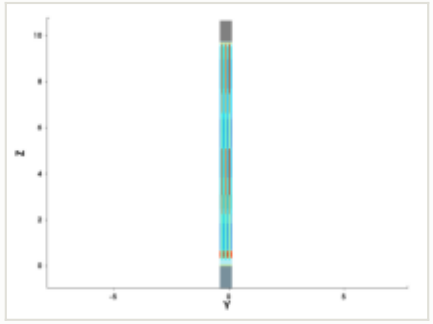

y cut at -0.150 µm

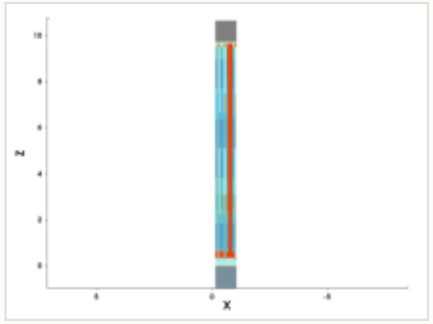

mask for this step

no mask for this step

steps by process area

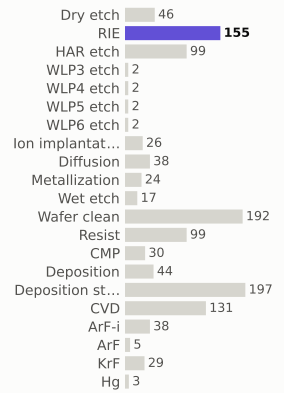

materials deposited (g)

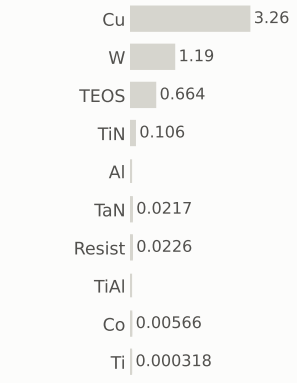

gases emitted (g)

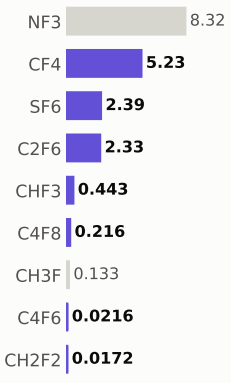

Step #20560: Dry_etch

etch_strip · Dry_etch

0.801	1,091.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

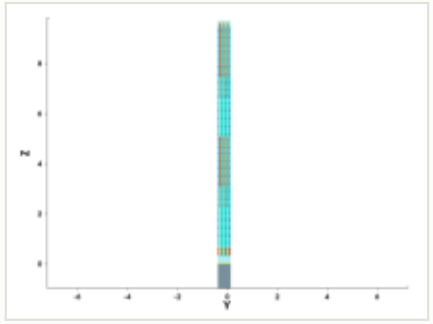

y cut at -0.150 µm

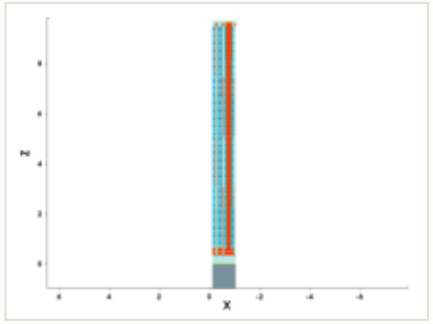

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

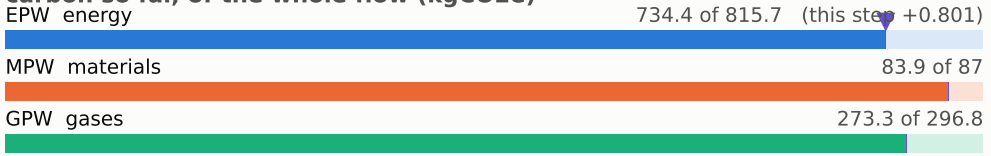

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

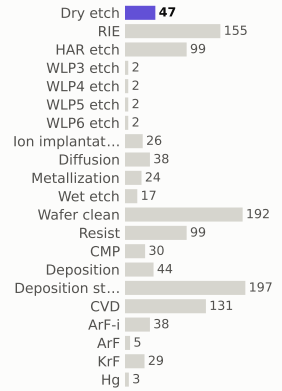

materials deposited (g)

gases emitted (g)

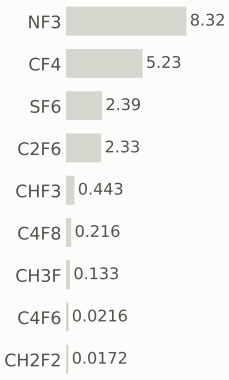

Step #20570: Wafer_clean

clean · Wafer_clean

0.169	1,091.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

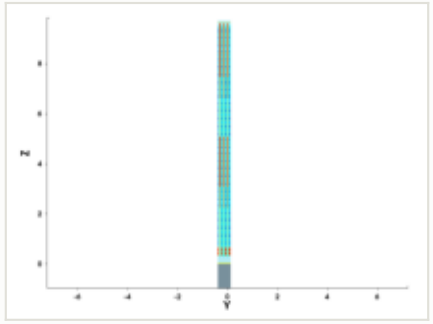

y cut at -0.150 µm

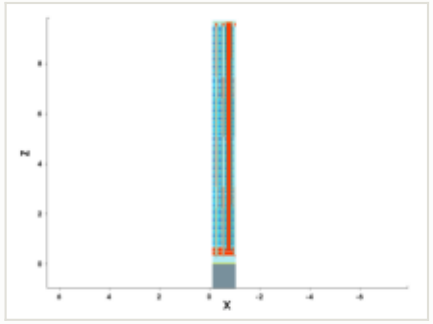

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

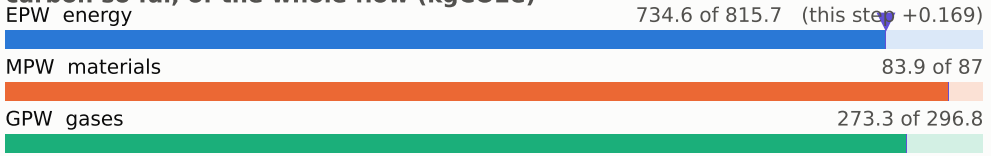

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

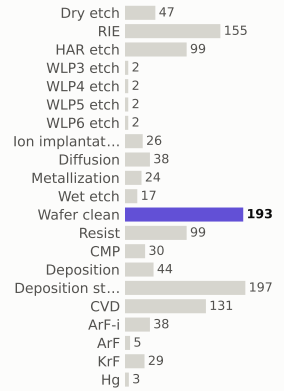

materials deposited (g)

gases emitted (g)

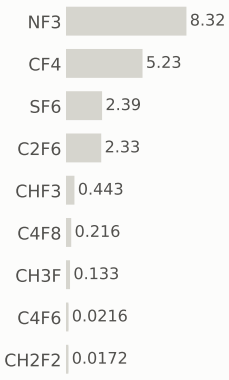

Step #20580: Deposition

depo_isotropic · Deposition

0.656	1,092.5	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

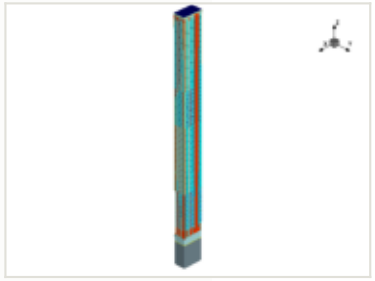

x cut at -0.570 µm

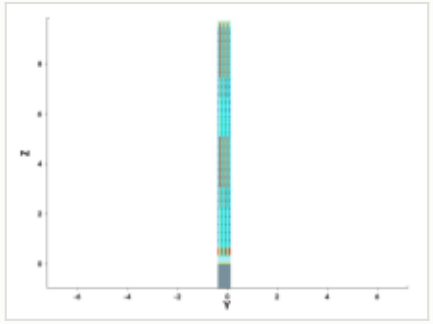

y cut at -0.150 µm

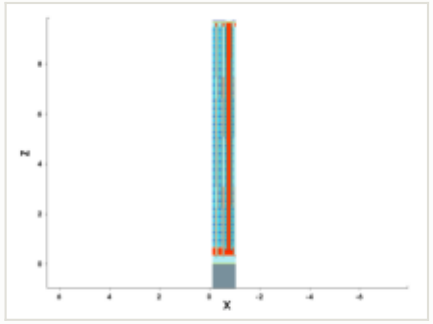

mask for this step

no mask for this step

this step

process area	Deposition
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000162 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

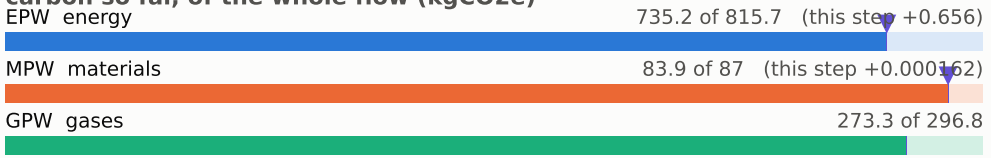

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

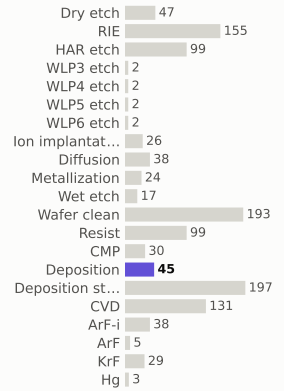

materials deposited (g)



gases emitted (g)

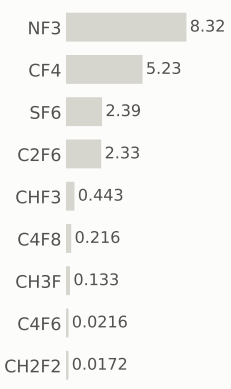

Step #20590: Metallization

depo_isotropic · Metallization

1.23	1,093.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

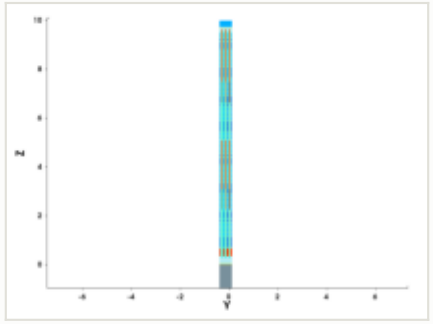

y cut at -0.150 µm

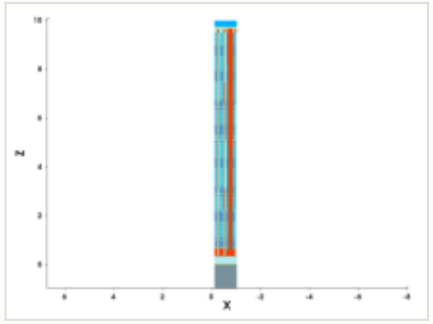

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.25 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0259 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.23 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

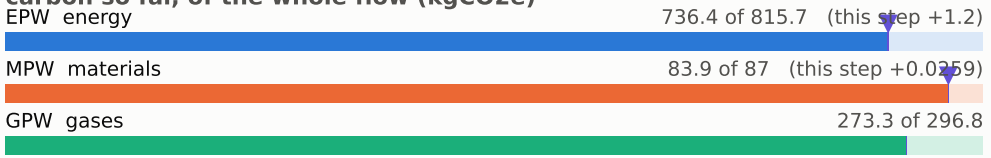

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

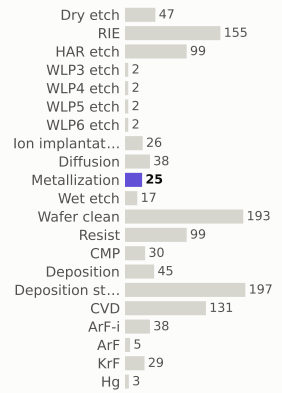

materials deposited (g)

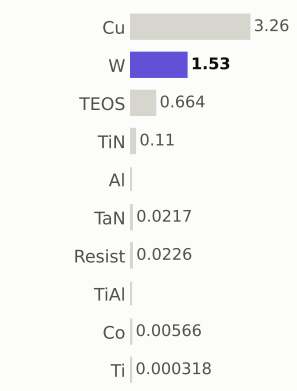

gases emitted (g)

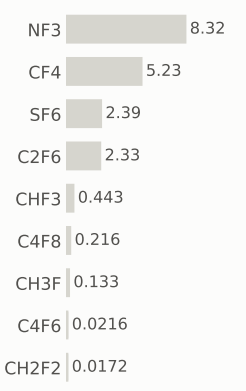

Step #20600: CMP

etch_cmp · CMP

0.169	1,093.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

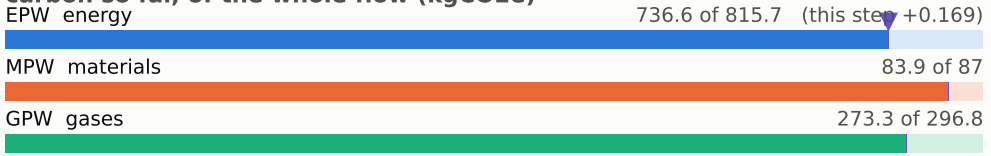

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

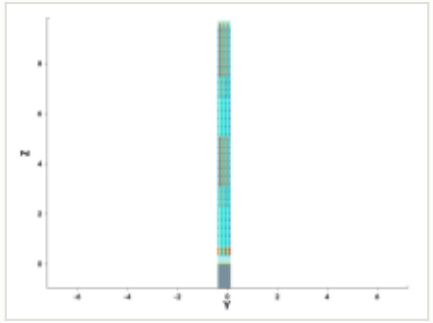

y cut at -0.150 µm

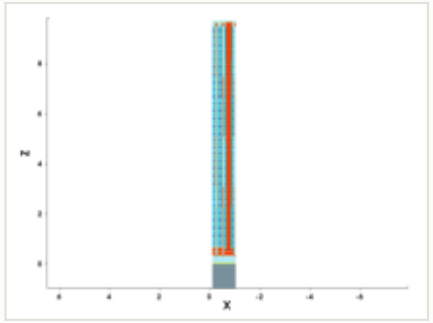

mask for this step

no mask for this step

steps by process area

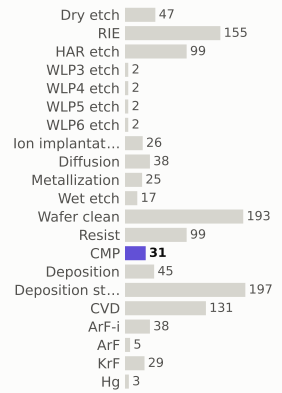

materials deposited (g)

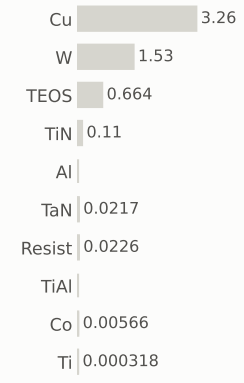

gases emitted (g)

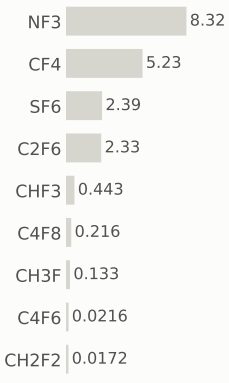

Step #20610: Wafer_clean

clean · Wafer_clean

0.169	1,094.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

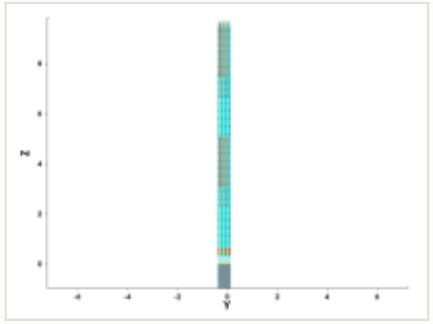

y cut at -0.150 µm

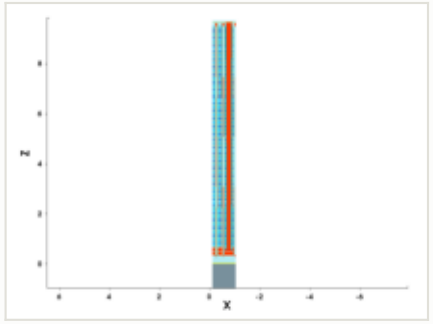

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

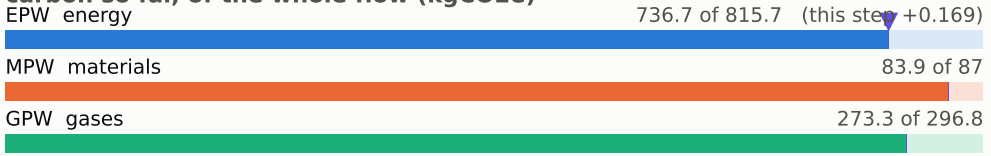

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

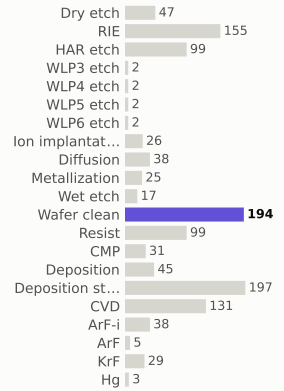

materials deposited (g)



gases emitted (g)

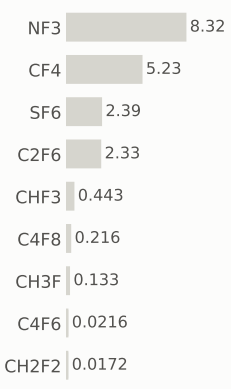

Step #20630: CVD

depo_isotropic · CVD

1.31	1,095.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

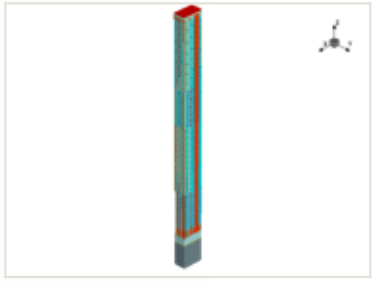

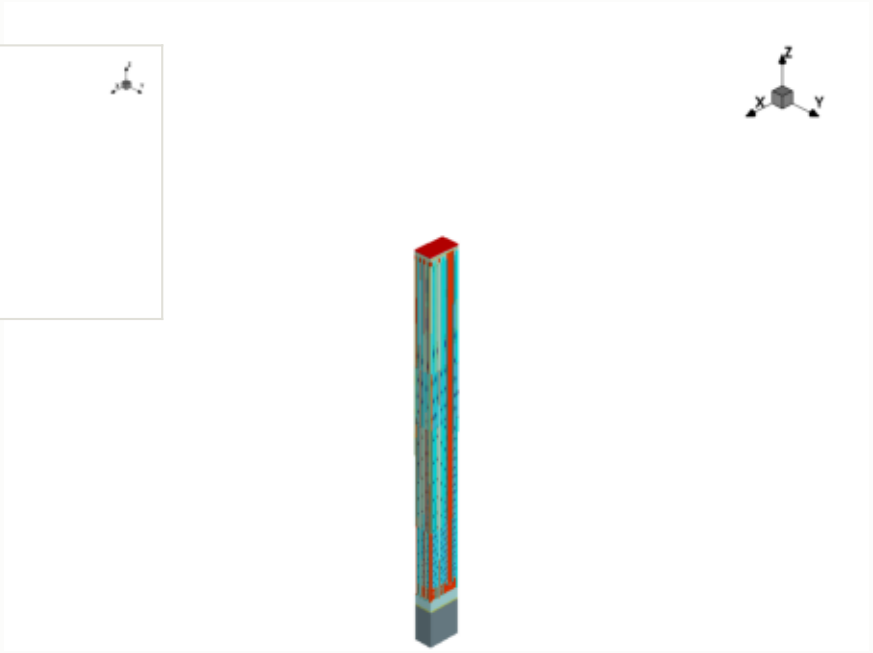

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

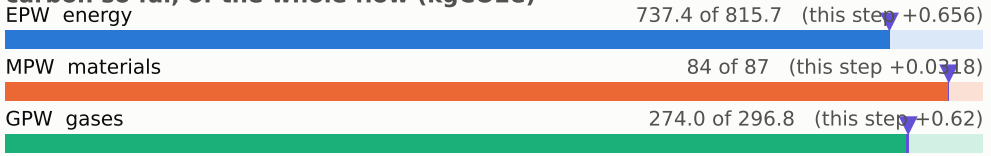

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

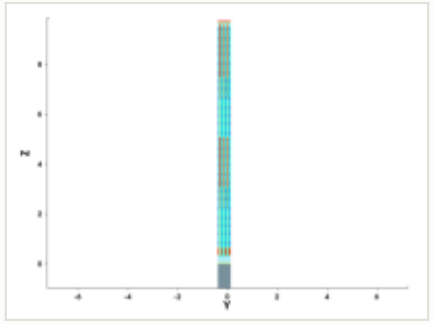

y cut at -0.150 µm

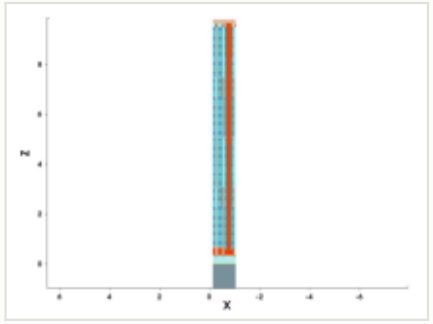

mask for this step

no mask for this step

steps by process area

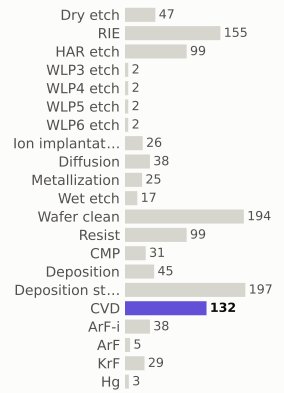

materials deposited (g)

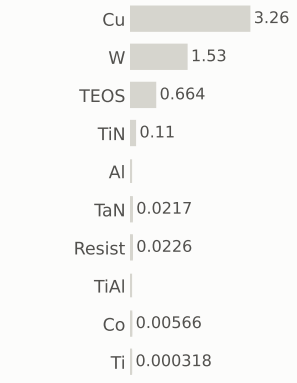

gases emitted (g)

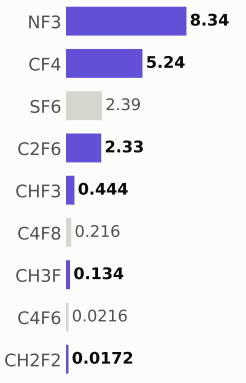

Step #20640: Wafer_clean

clean · Wafer_clean

0.169	1,095.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

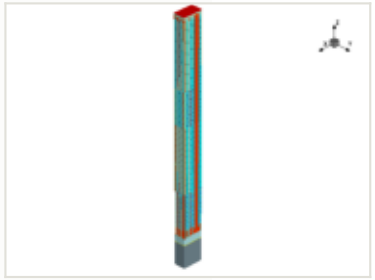

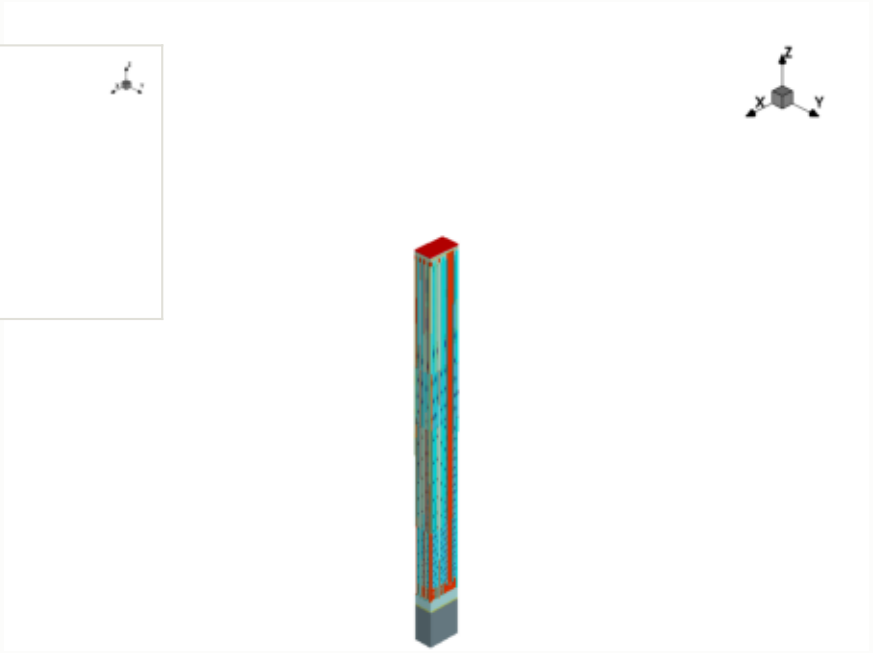

x cut at -0.570 µm

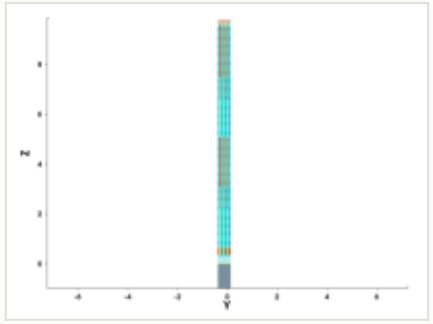

y cut at -0.150 µm

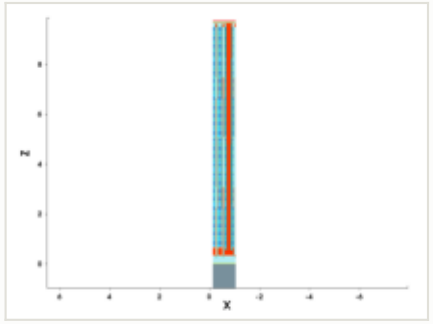

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

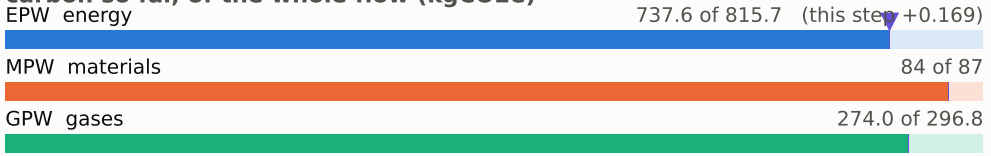

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

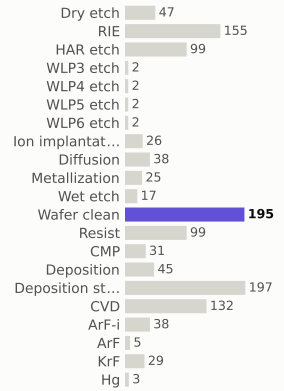

materials deposited (g)

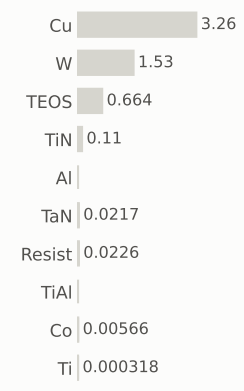

gases emitted (g)

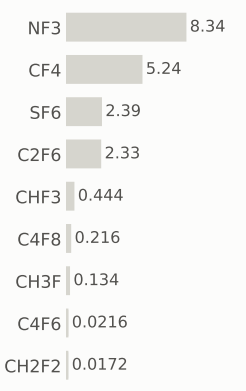

Step #20650: ArF-i

litho_patterning · ArF-i

0.217	1,095.7	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

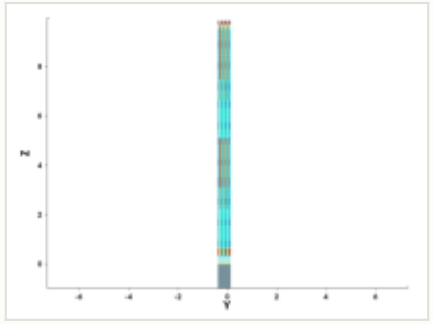

y cut at -0.150 µm

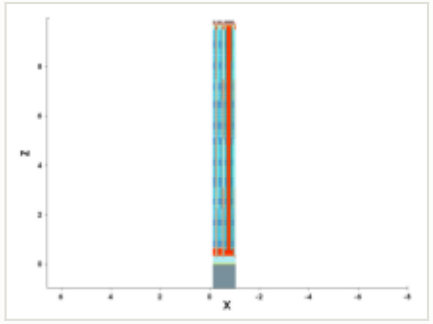

mask: layer 41:0, negative (GDSII)

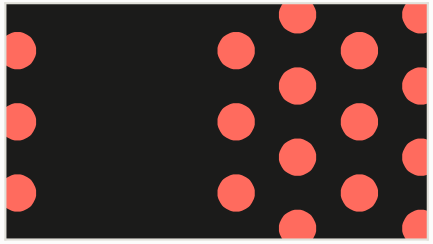

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

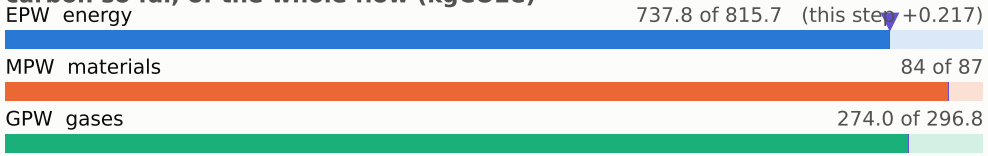

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

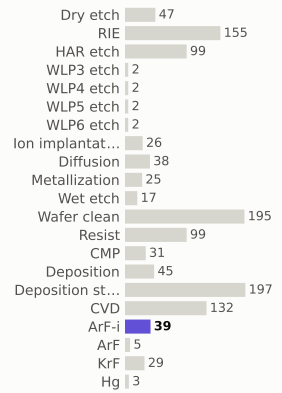

materials deposited (g)

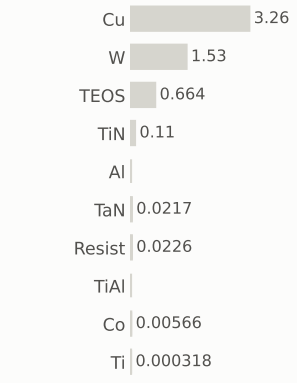

gases emitted (g)

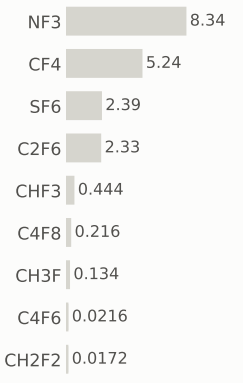

Step #20660: RIE

etch_anisotropic · RIE

1.04	1,096.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

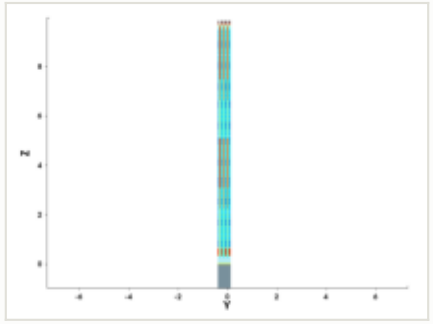

y cut at -0.150 µm

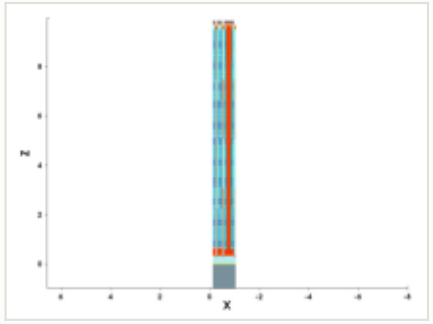

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

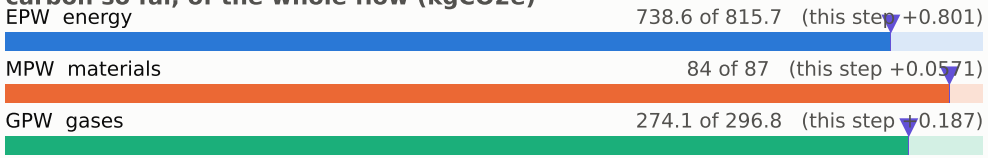

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

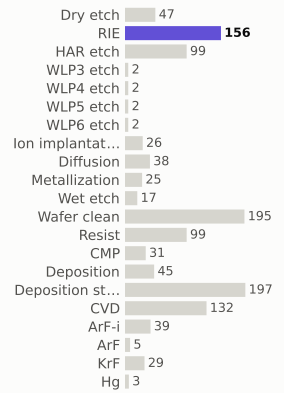

materials deposited (g)

gases emitted (g)

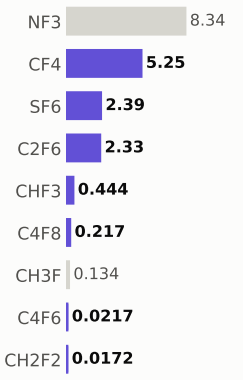

Step #20670: RIE

etch_anisotropic · RIE

1.04	1,097.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

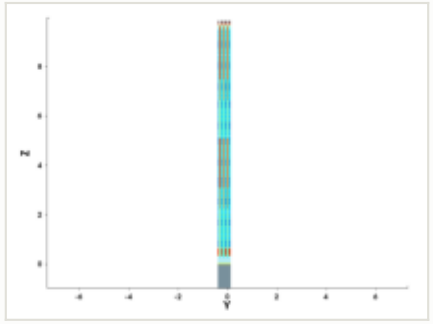

y cut at -0.150 µm

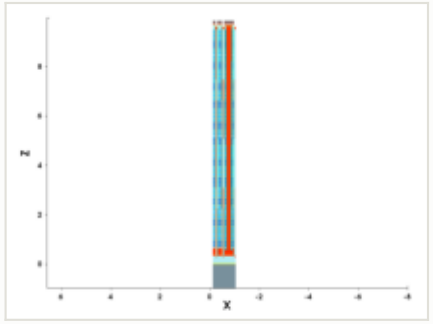

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

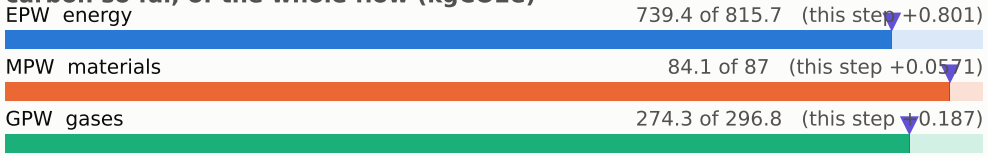

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

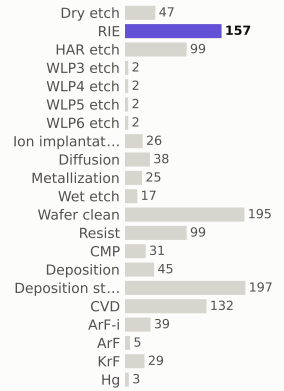

materials deposited (g)

gases emitted (g)

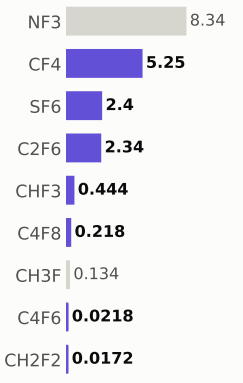

Step #20680: Dry_etch

etch_strip · Dry_etch

0.801	1,098.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

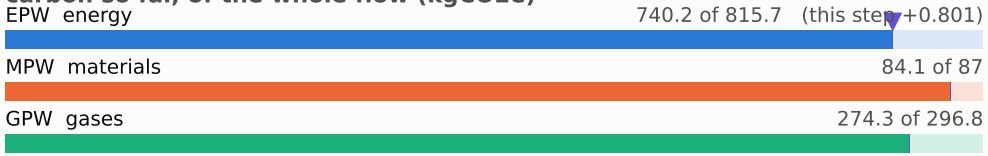

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

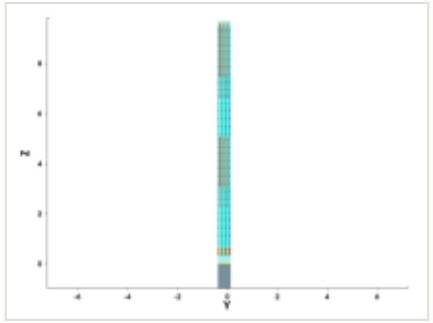

y cut at -0.150 µm

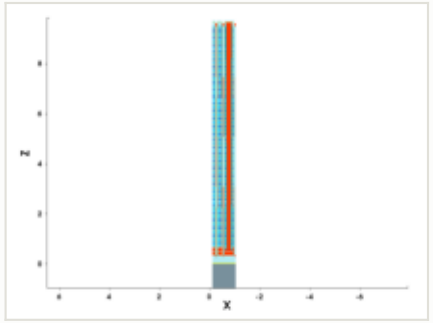

mask for this step

no mask for this step

steps by process area

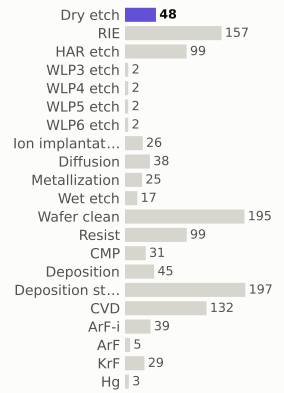

materials deposited (g)

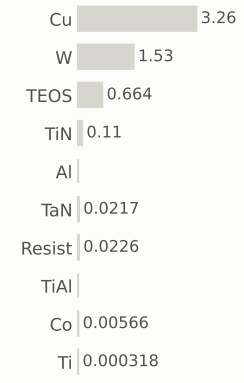

gases emitted (g)

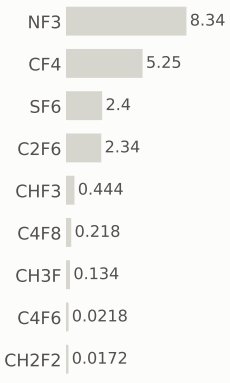

Step #20690: Wafer_clean

clean · Wafer_clean

0.169	1,098.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

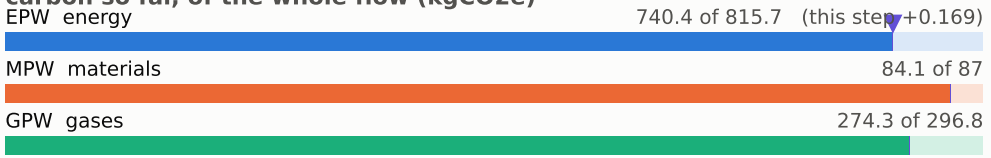

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

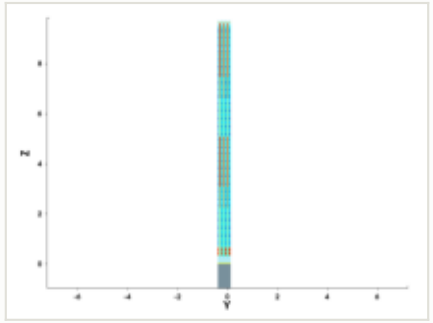

y cut at -0.150 µm

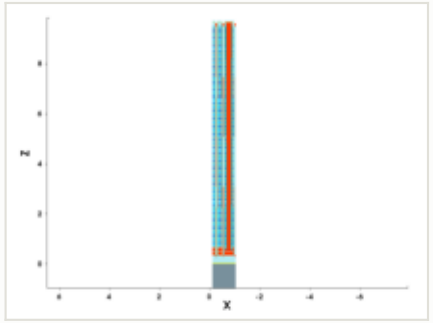

mask for this step

no mask for this step

steps by process area

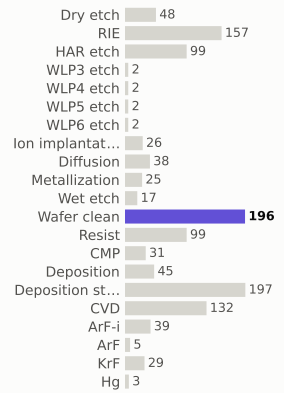

materials deposited (g)

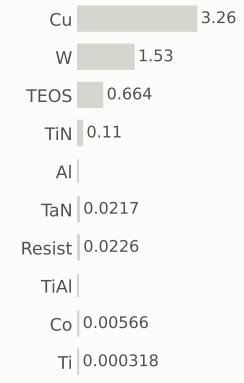

gases emitted (g)

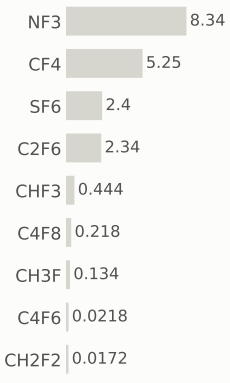

Step #20700: CVD

depo_ellipsoidal · CVD

1.31	1,100.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

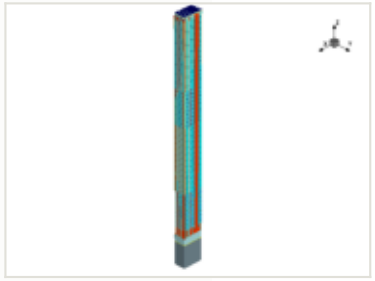

x cut at -0.570 µm

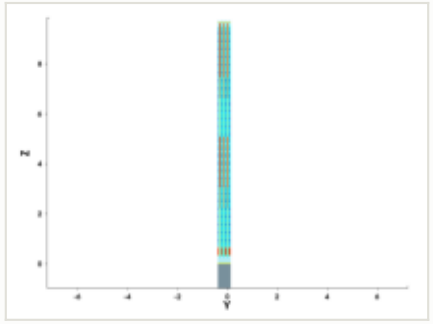

y cut at -0.150 µm

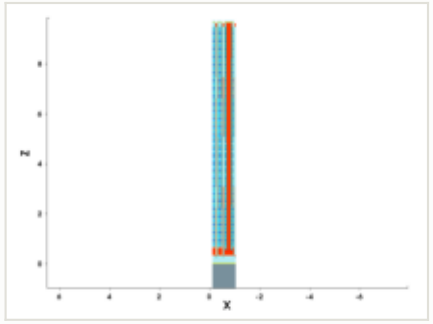

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.009 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0319 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

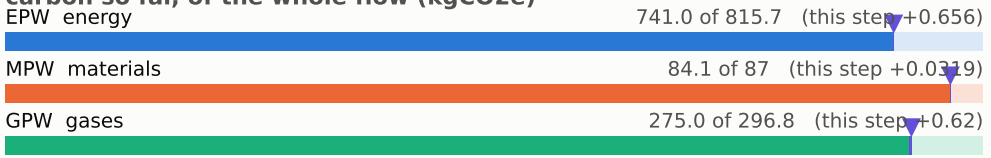

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

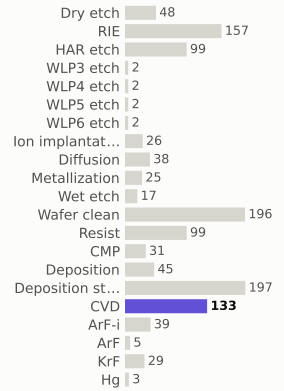

materials deposited (g)

gases emitted (g)

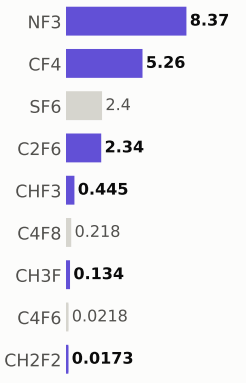

Step #20710: Metallization

depo_isotropic · Metallization

1.21	1,101.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

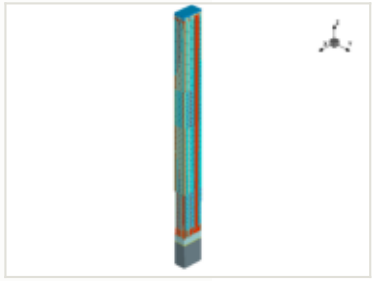

x cut at -0.570 µm

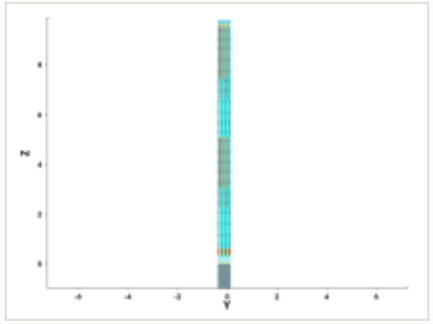

y cut at -0.150 µm

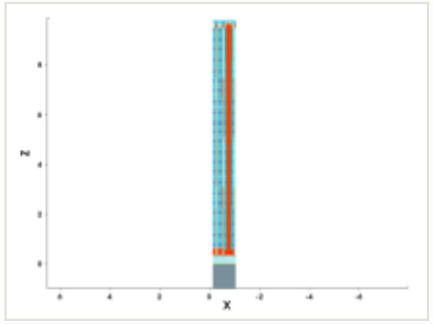

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

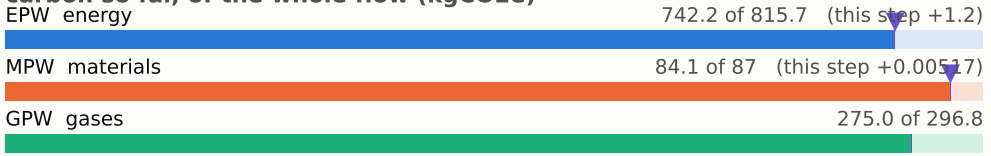

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

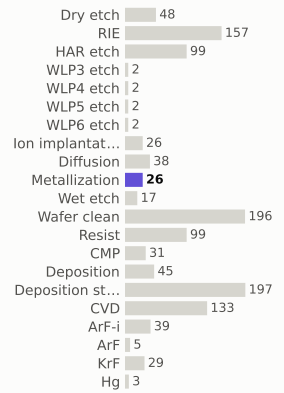

materials deposited (g)

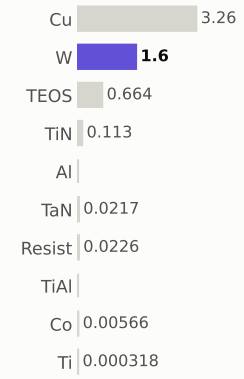

gases emitted (g)

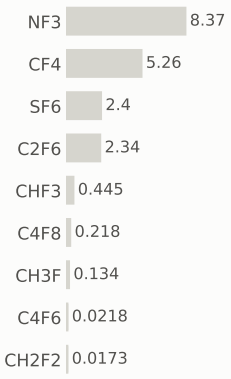

Step #20720: CMP

etch_cmp · CMP

0.169	1,101.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

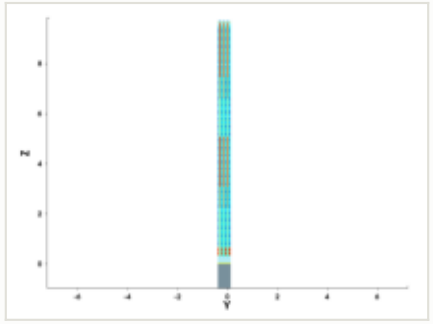

y cut at -0.150 µm

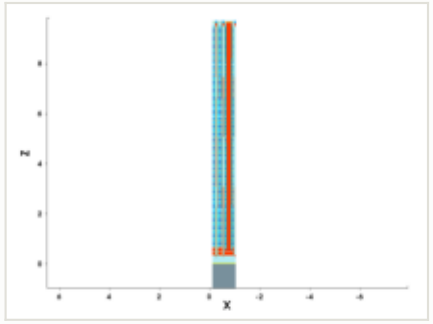

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

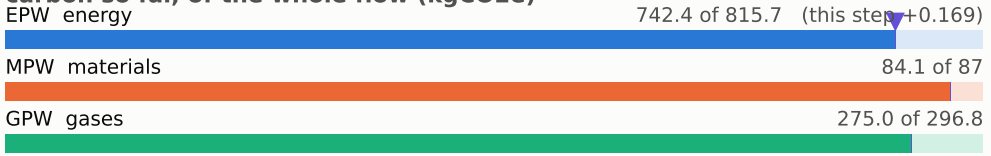

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

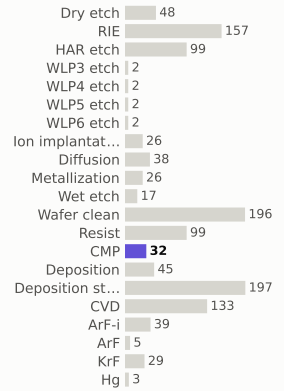

materials deposited (g)

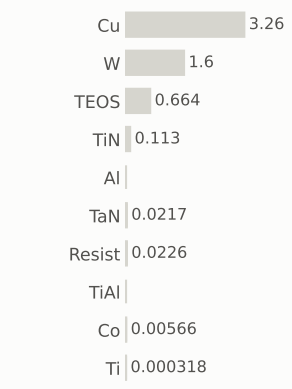

gases emitted (g)

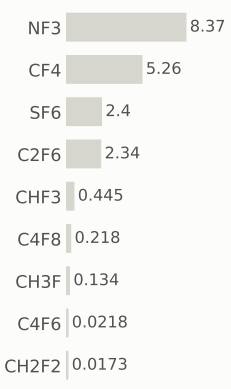

Step #20730: Wafer_clean

clean · Wafer_clean

0.169	1,101.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

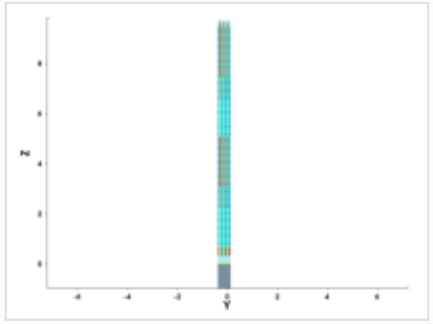

y cut at -0.150 µm

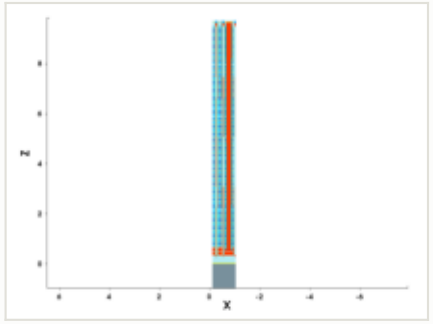

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

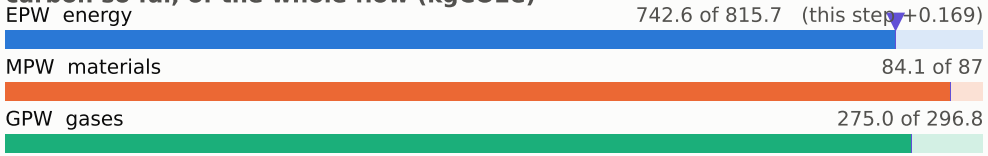

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

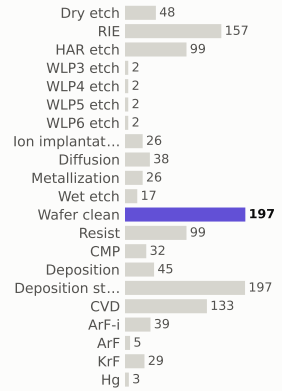

materials deposited (g)

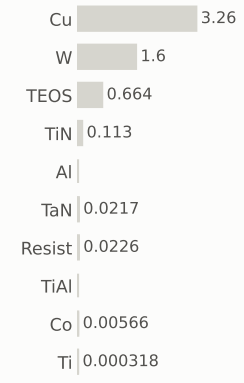

gases emitted (g)

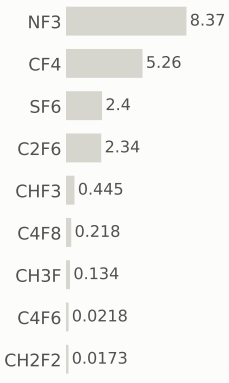

Step #20740: CVD

depo_isotropic · CVD

1.31	1,102.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

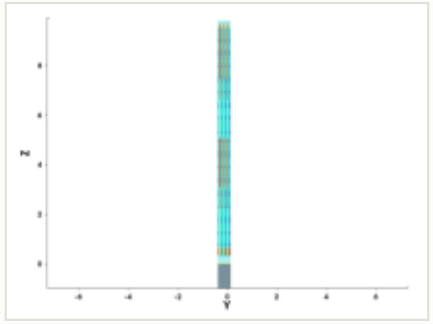

y cut at -0.150 µm

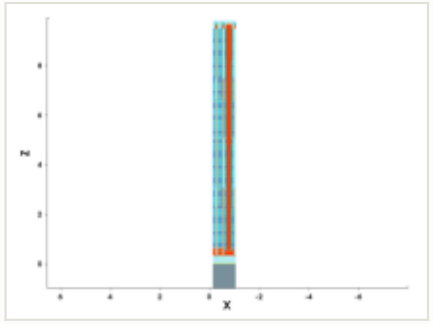

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.09 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

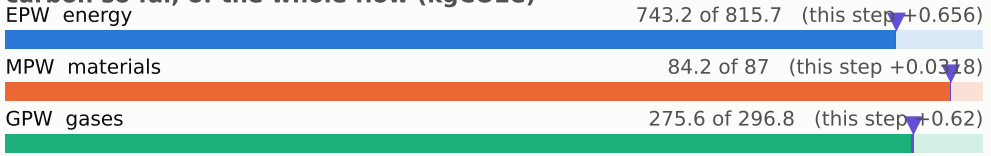

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

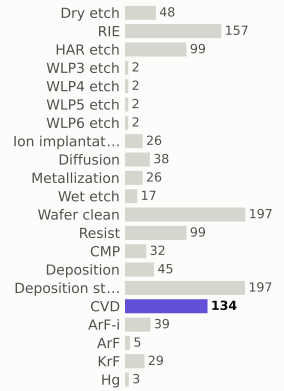

materials deposited (g)

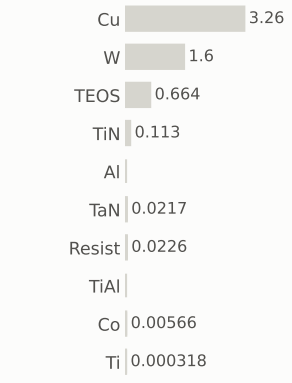

gases emitted (g)

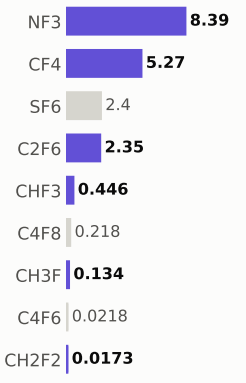

Step #20750: CVD

depo_isotropic · CVD

1.31	1,104.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

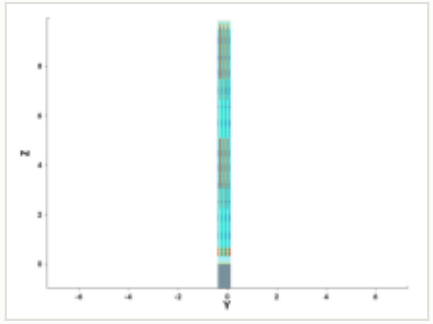

y cut at -0.150 µm

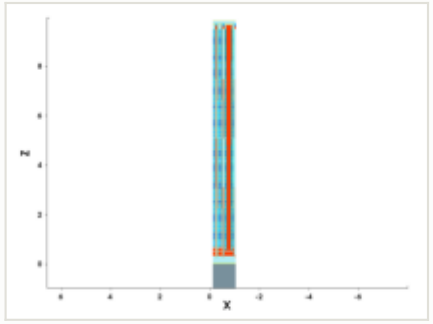

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.024 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

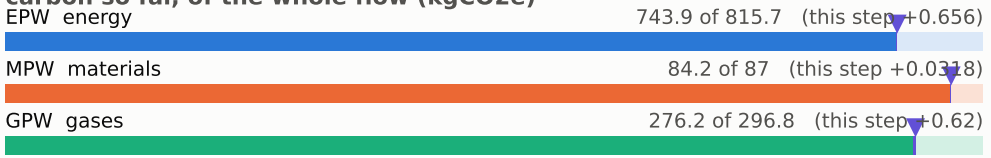

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

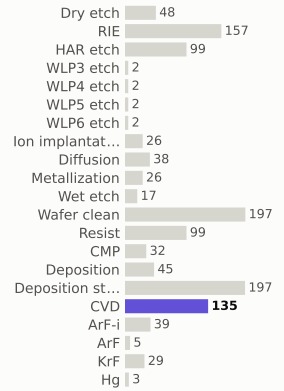

materials deposited (g)



gases emitted (g)

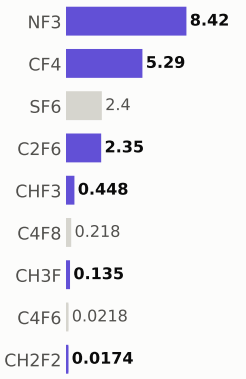

Step #20760: CVD

depo_isotropic · CVD

1.31	1,105.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

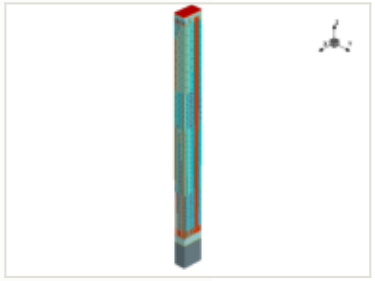

x cut at -0.570 µm

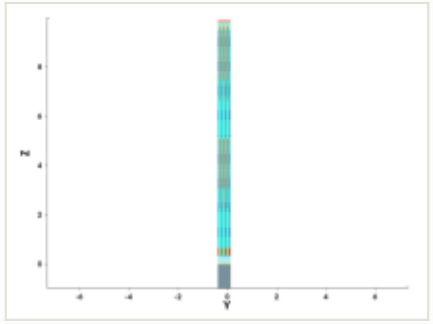

y cut at -0.150 µm

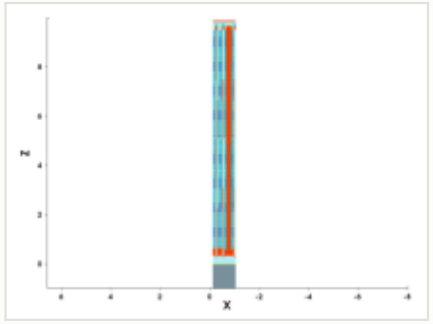

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

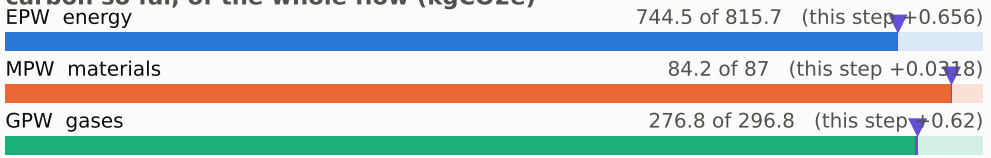

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

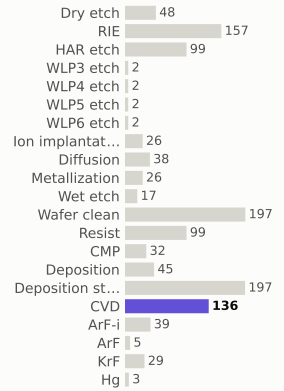

materials deposited (g)

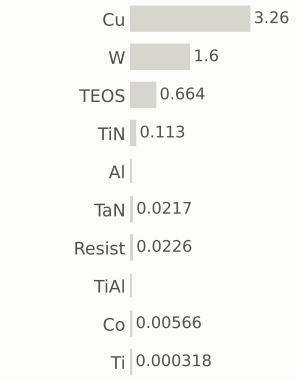

gases emitted (g)

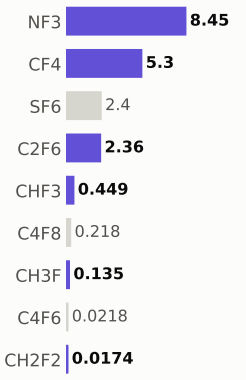

Step #20770: Wafer_clean

clean · Wafer_clean

0.169	1,105.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

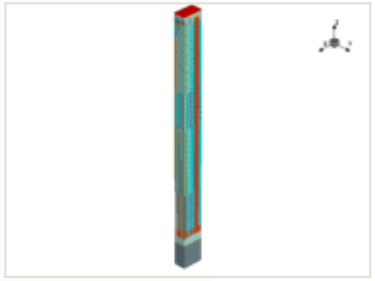

x cut at -0.570 µm

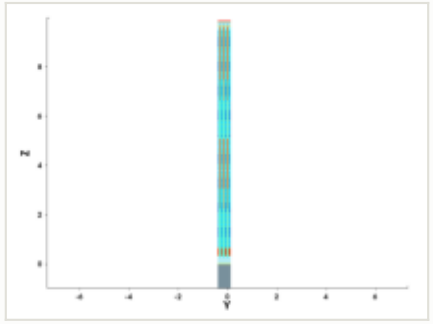

y cut at -0.150 µm

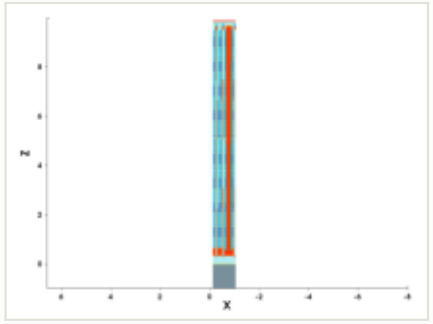

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

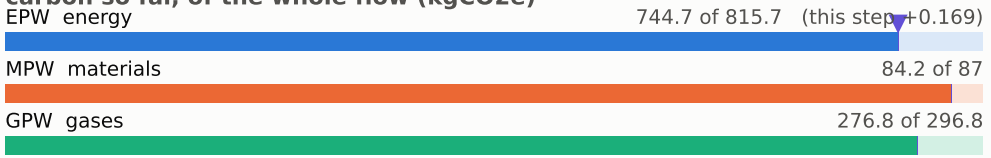

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

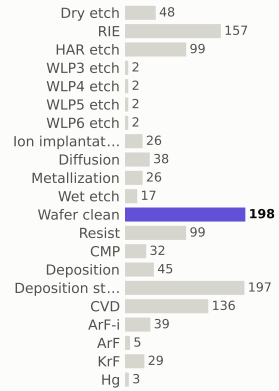

materials deposited (g)

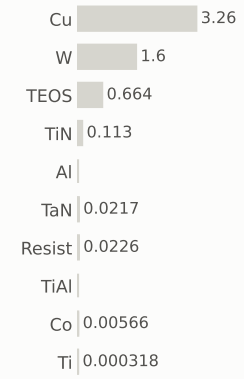

gases emitted (g)

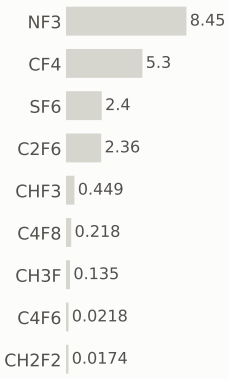

Step #20780: ArF-i

litho_patterning · ArF-i

0.217	1,105.9	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

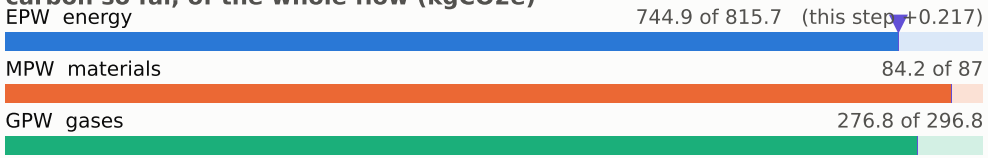

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

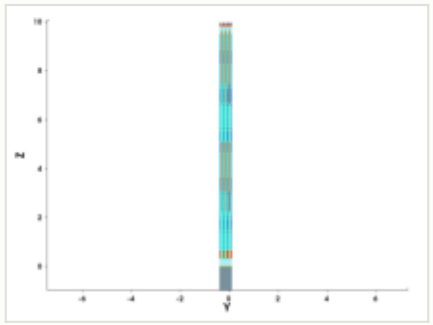

y cut at -0.150 µm

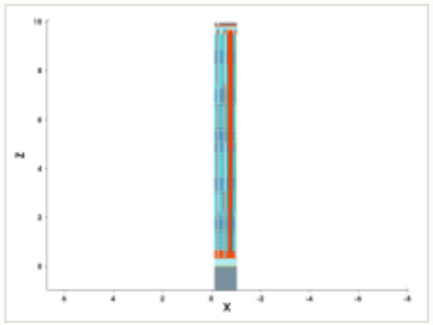

mask: layer 42:0, negative (GDSII)

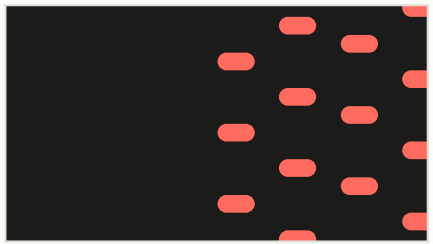

steps by process area

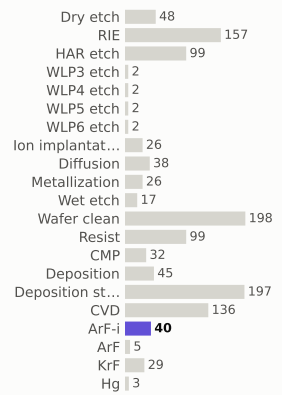

materials deposited (g)



gases emitted (g)

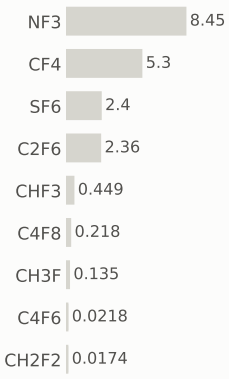

Step #20790: RIE

etch_anisotropic · RIE

1.04	1,107.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

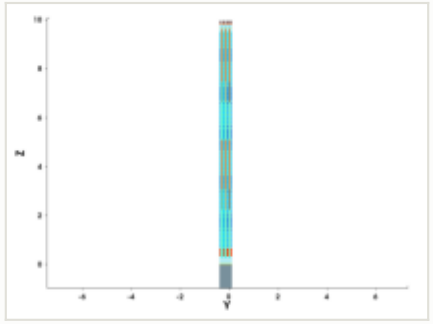

y cut at -0.150 µm

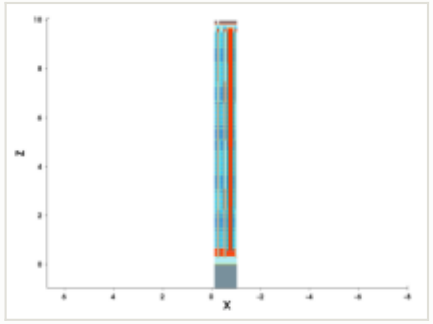

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

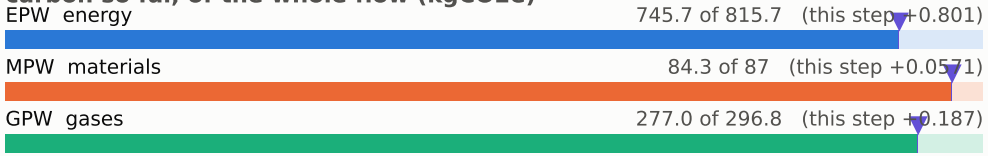

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

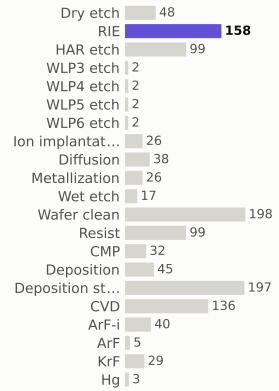

materials deposited (g)

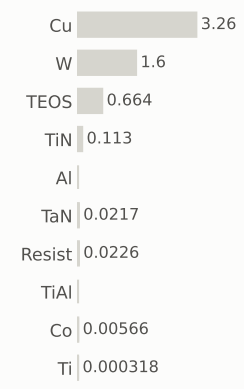

gases emitted (g)

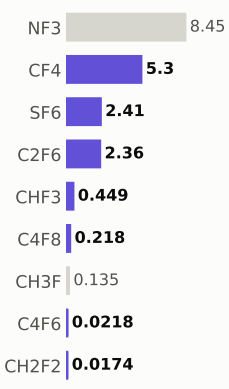

Step #20800: RIE

etch_anisotropic · RIE

1.04	1,108.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

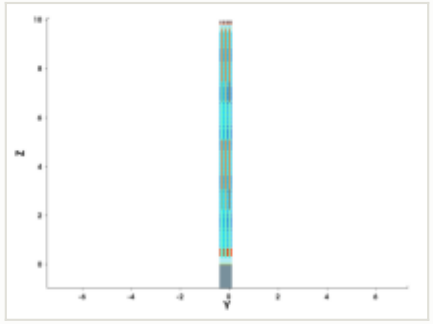

y cut at -0.150 µm

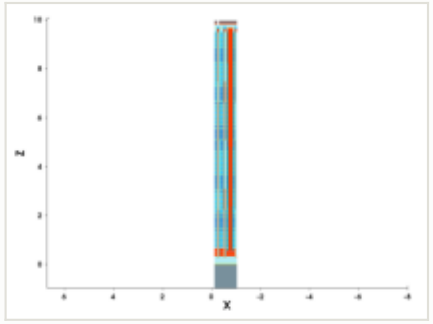

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

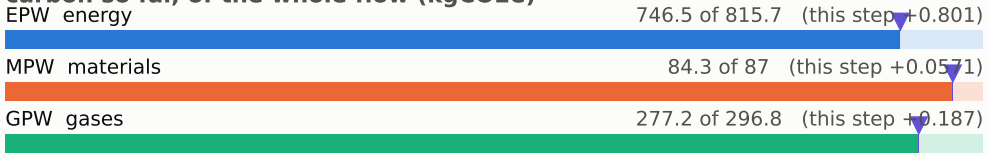

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

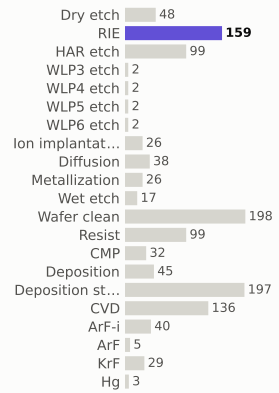

materials deposited (g)

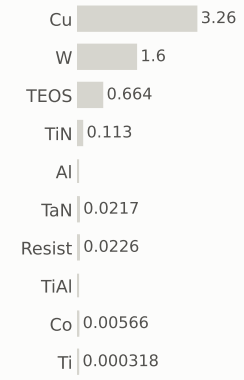

gases emitted (g)

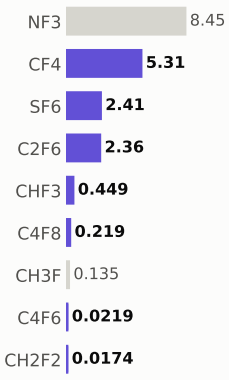

Step #20810: RIE

etch_isotropic · RIE

1.04	1,109.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

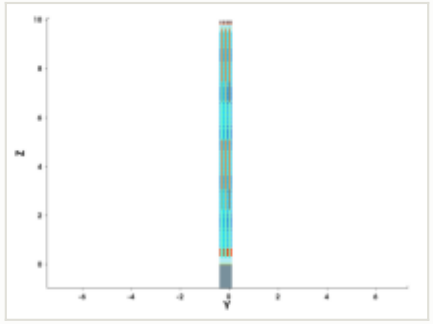

y cut at -0.150 µm

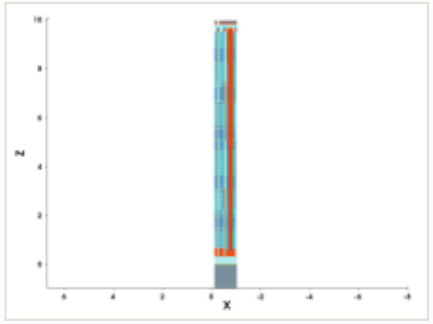

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

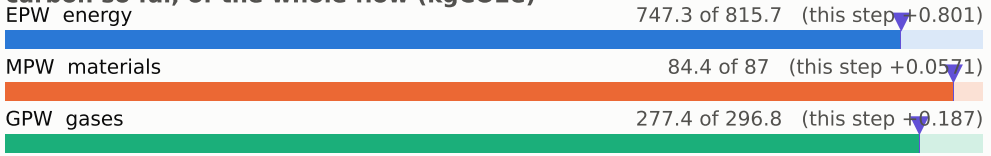

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

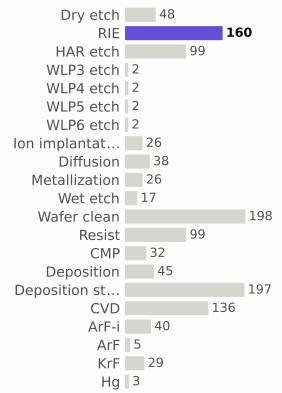

materials deposited (g)

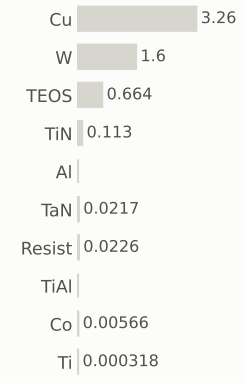

gases emitted (g)

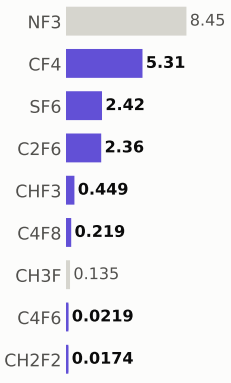

Step #20820: Dry_etch

etch_strip · Dry_etch

0.801	1,109.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

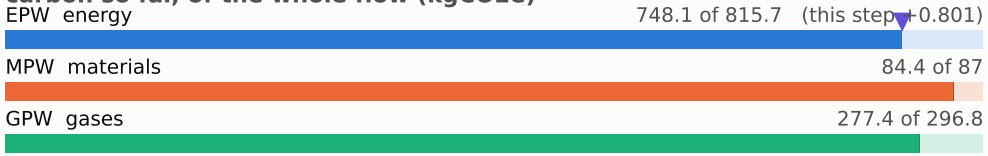

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

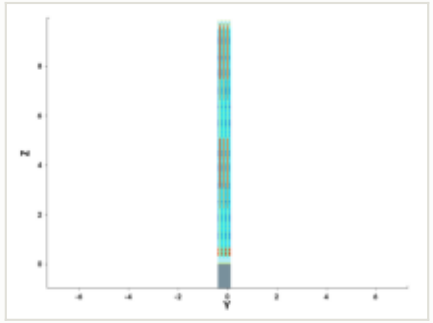

y cut at -0.150 µm

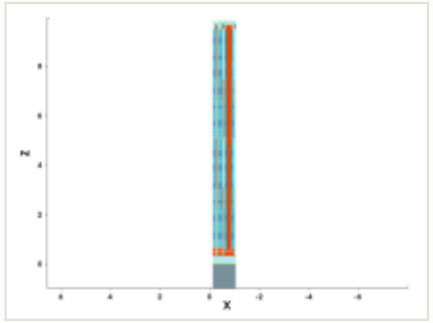

mask for this step

no mask for this step

steps by process area

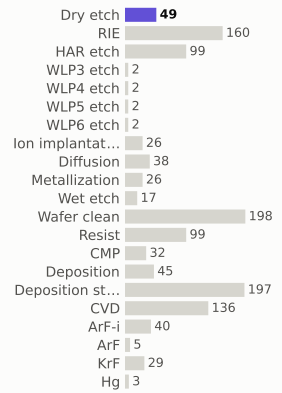

materials deposited (g)

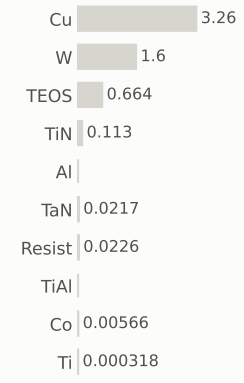

gases emitted (g)

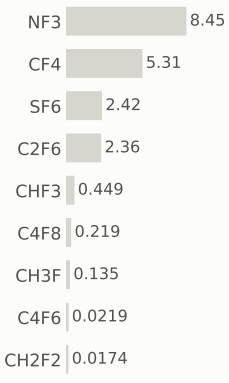

Step #20830: Wafer_clean

clean · Wafer_clean

0.169	1,110.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

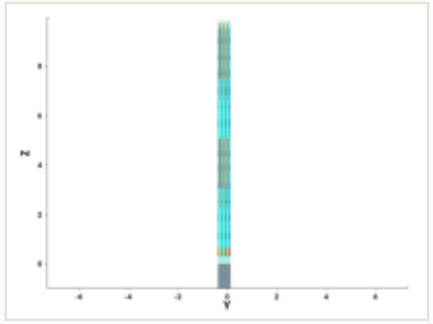

y cut at -0.150 µm

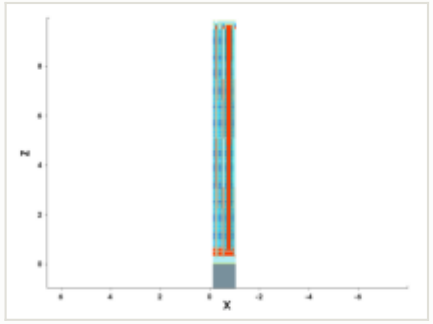

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

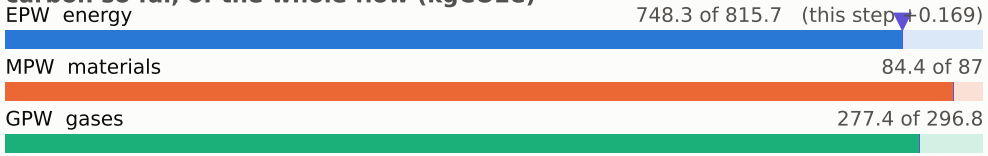

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

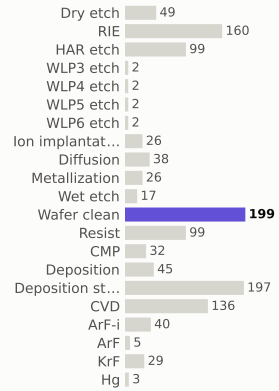

materials deposited (g)



gases emitted (g)

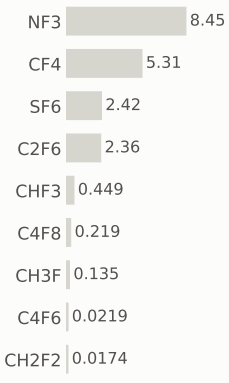

Step #20840: CVD

depo_ellipsoidal · CVD

1.31	1,111.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	TiN
thickness	0.005 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

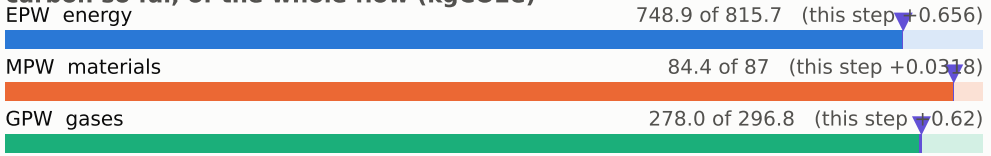

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

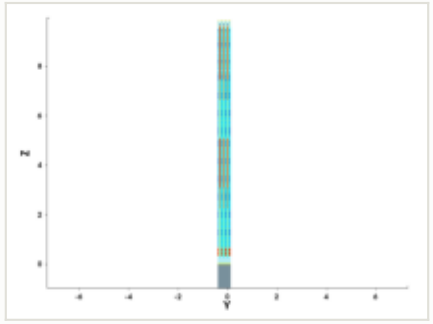

y cut at -0.150 µm

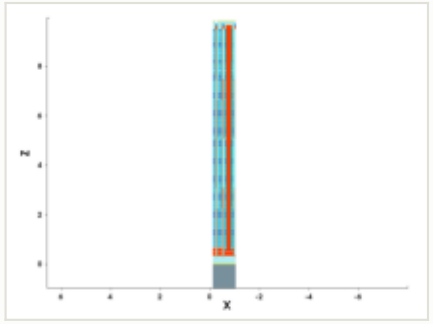

mask for this step

no mask for this step

steps by process area

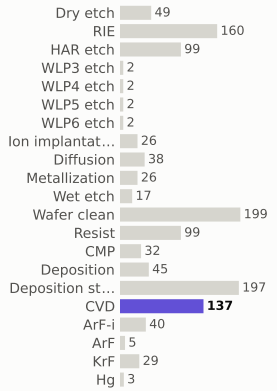

materials deposited (g)

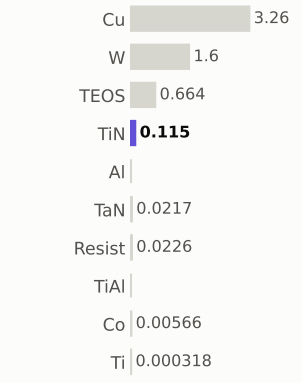

gases emitted (g)

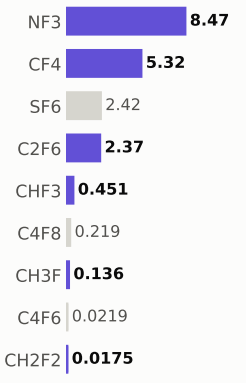

Step #20850: Metallization

depo_isotropic · Metallization

1.22	1,112.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

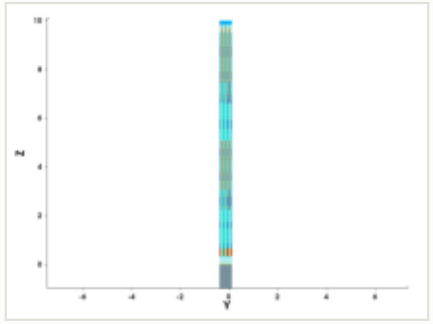

y cut at -0.150 µm

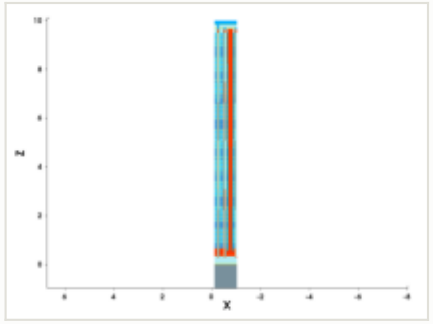

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

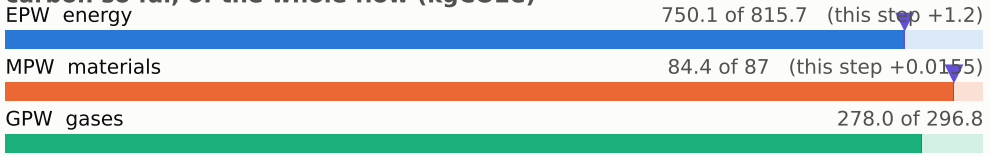

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

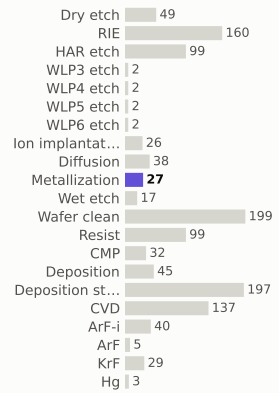

materials deposited (g)



gases emitted (g)

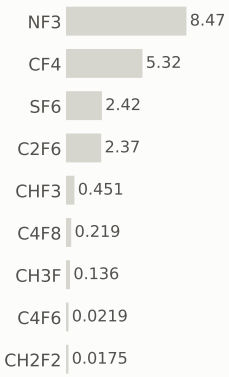

Step #20860: CMP

etch_cmp · CMP

0.169	1,112.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

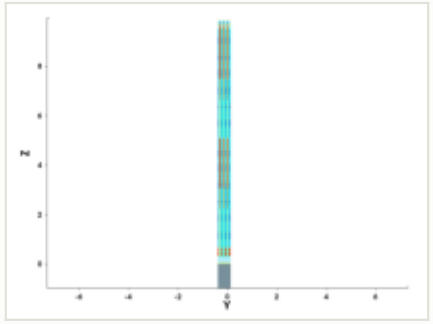

y cut at -0.150 µm

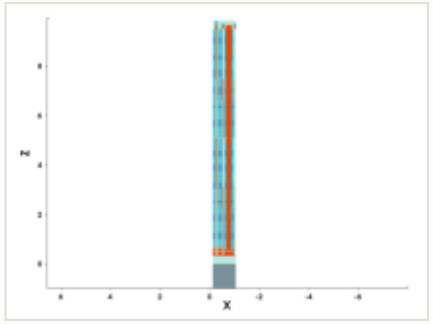

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

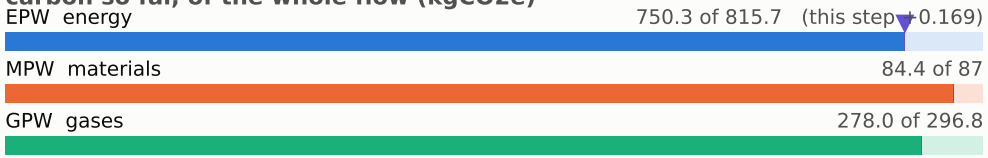

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

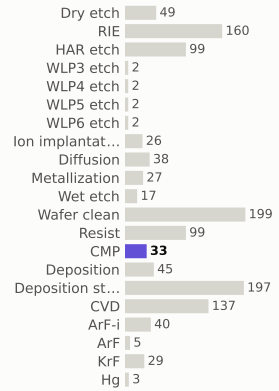

materials deposited (g)

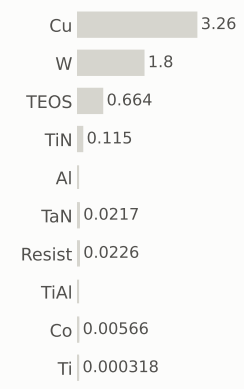

gases emitted (g)

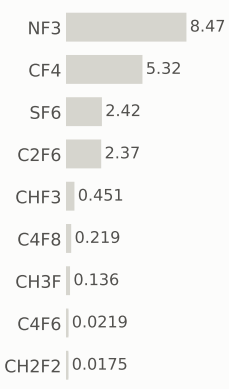

Step #20870: RIE

etch_anisotropic · RIE

1.04	1,113.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

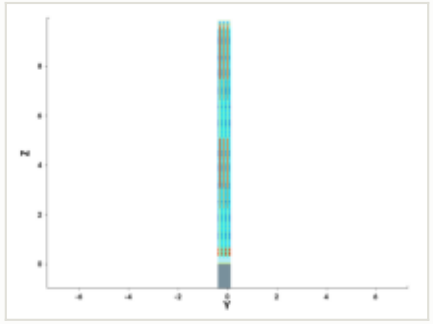

y cut at -0.150 µm

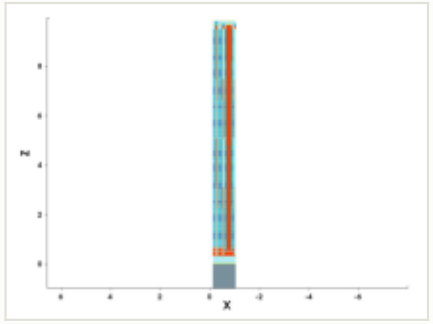

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

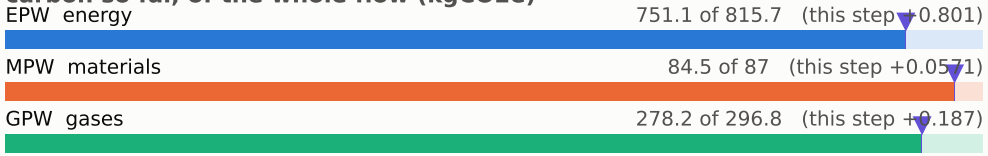

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

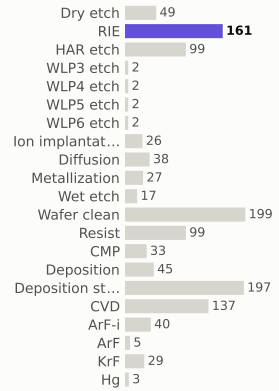

materials deposited (g)

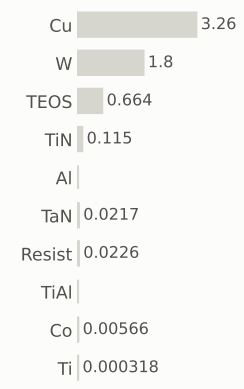

gases emitted (g)

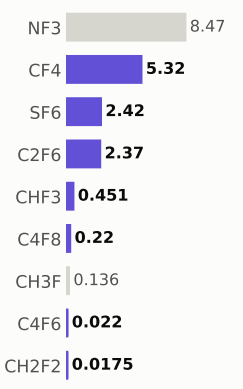

Step #20880: CVD

depo_isotropic · CVD

1.31	1,115.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

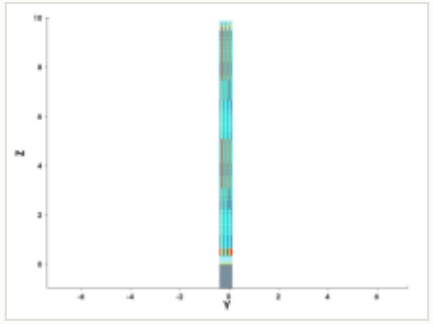

y cut at -0.150 µm

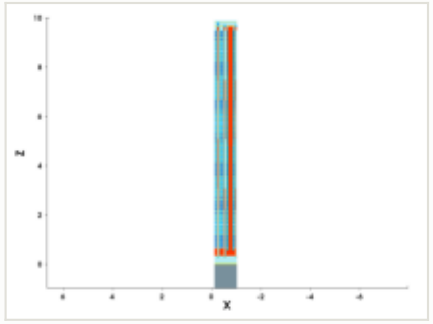

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.05 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

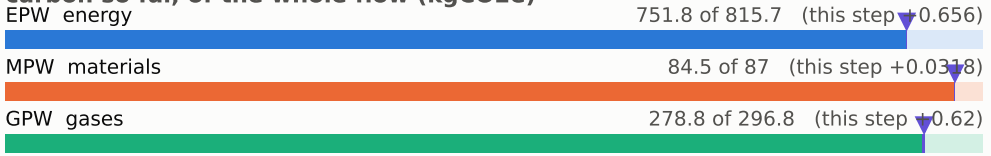

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

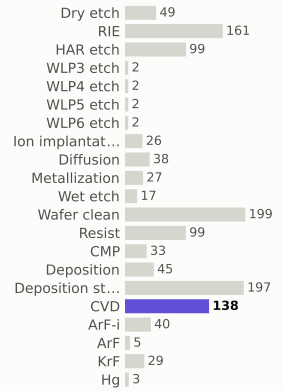

materials deposited (g)

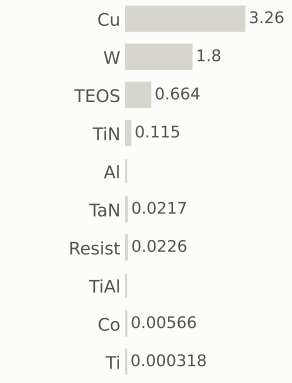

gases emitted (g)

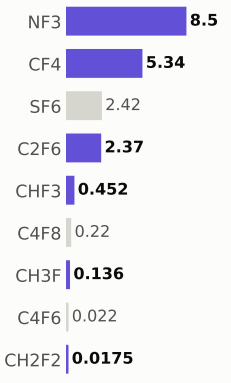

Step #20890: CMP

etch_cmp · CMP

0.169	1,115.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

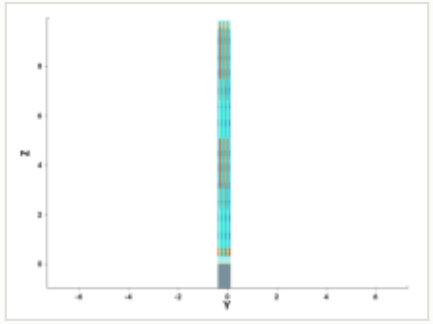

y cut at -0.150 µm

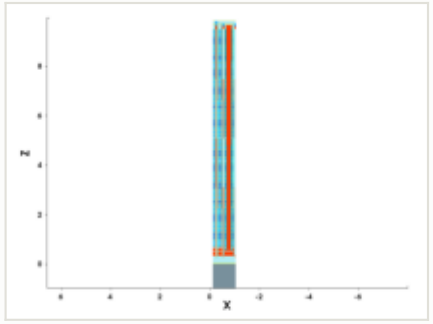

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

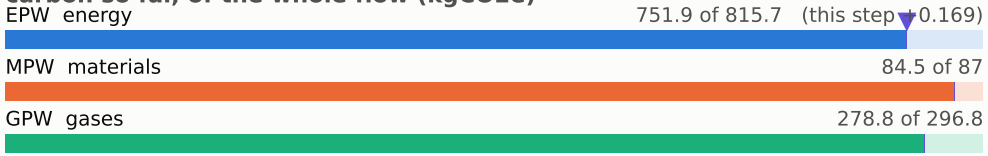

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

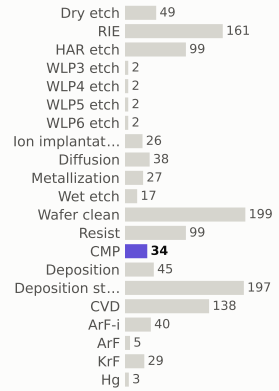

materials deposited (g)

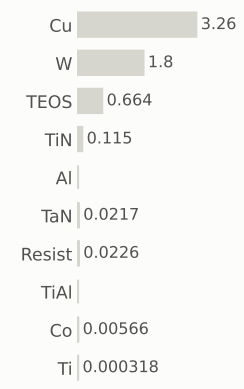

gases emitted (g)

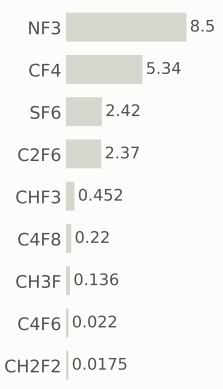

Step #20900: Wafer_clean

clean · Wafer_clean

0.169	1,115.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

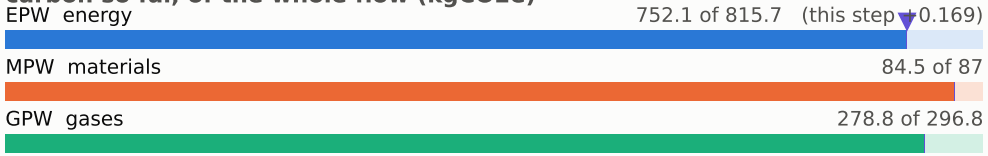

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

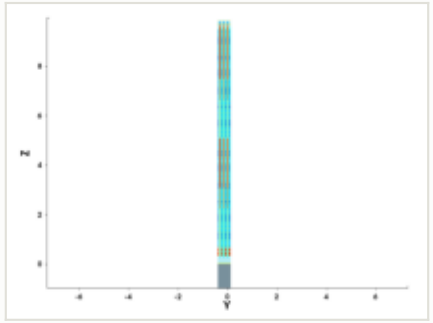

y cut at -0.150 µm

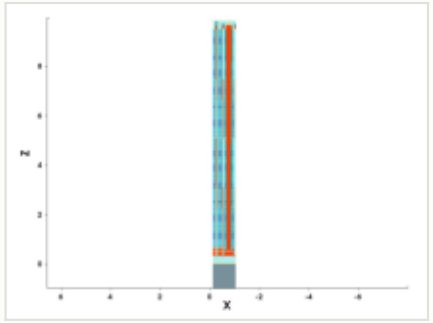

mask for this step

no mask for this step

steps by process area

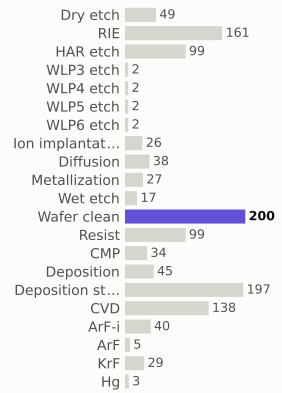

materials deposited (g)

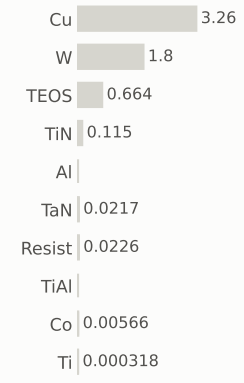

gases emitted (g)

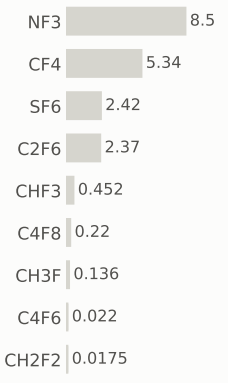

Step #20910: CVD

depo_isotropic · CVD

1.31	1,116.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

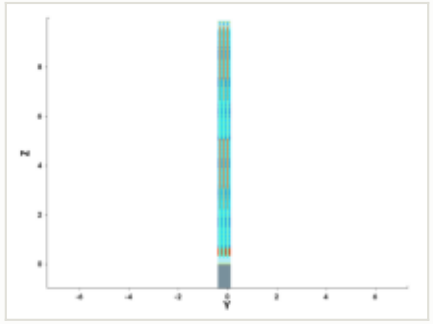

y cut at -0.150 µm

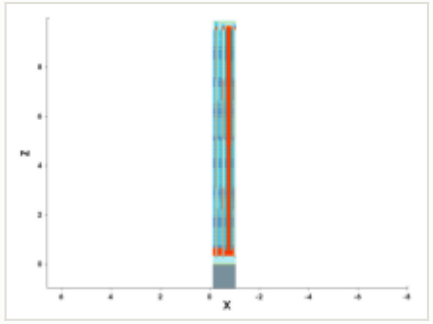

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

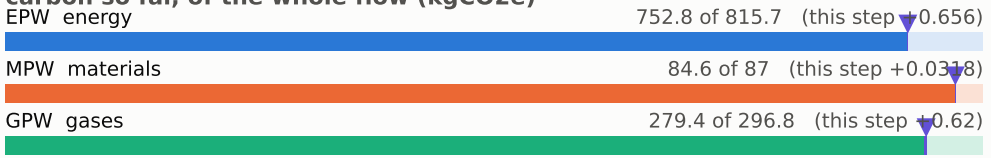

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

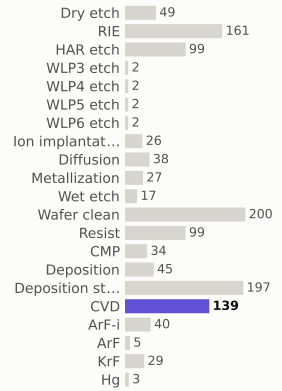

materials deposited (g)

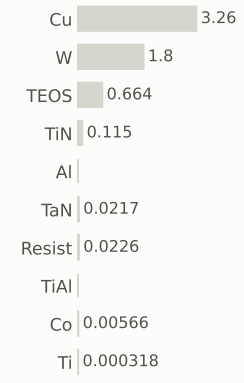

gases emitted (g)

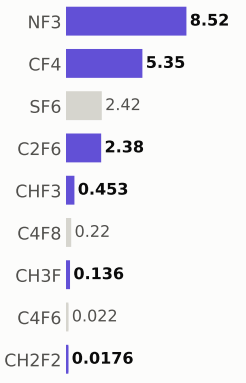

Step #20930: CVD

depo_isotropic · CVD

1.31	1,118.1	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

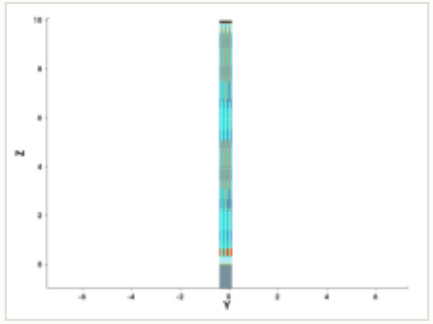

y cut at -0.150 µm

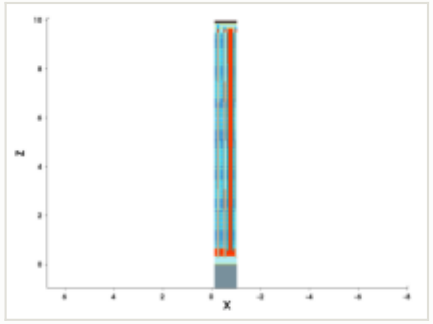

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

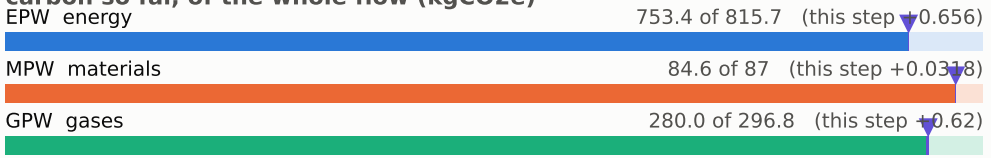

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

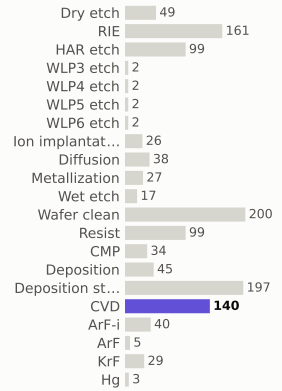

materials deposited (g)

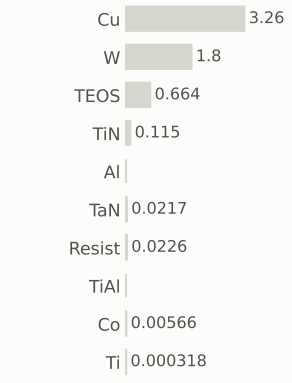

gases emitted (g)

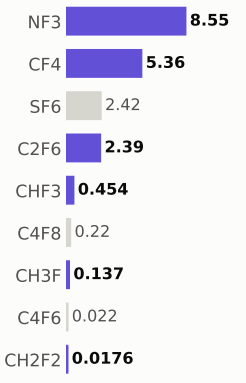

Step #20940: CVD

depo_isotropic · CVD

1.31	1,119.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

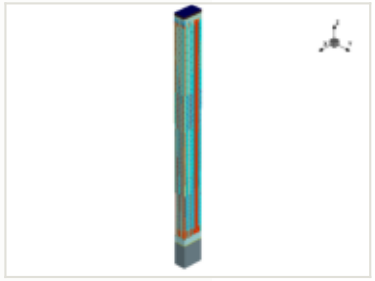

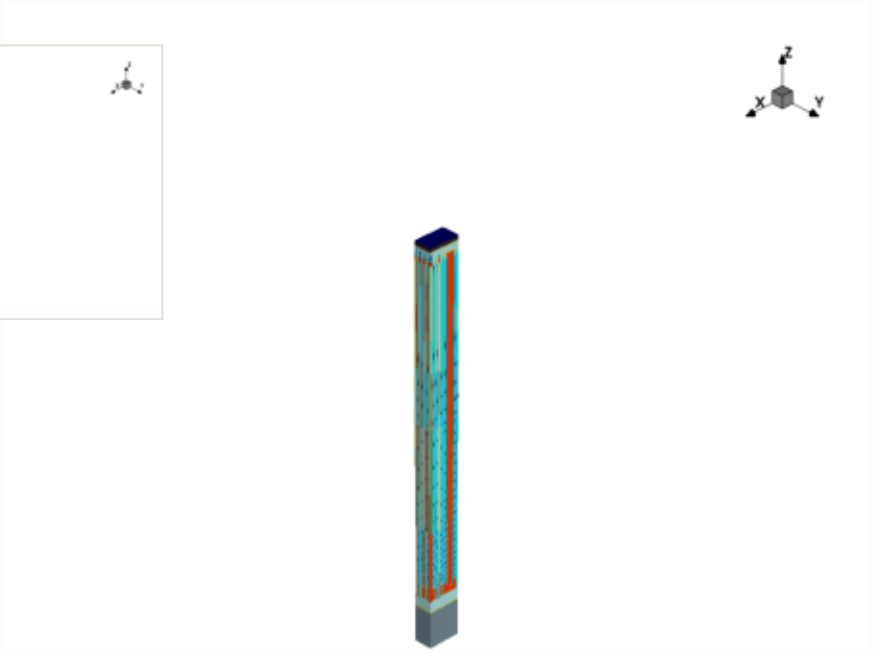

this step

process area	CVD
material	TiN
thickness	0.02 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0321 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

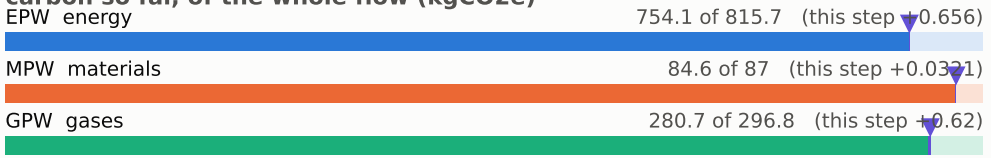

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

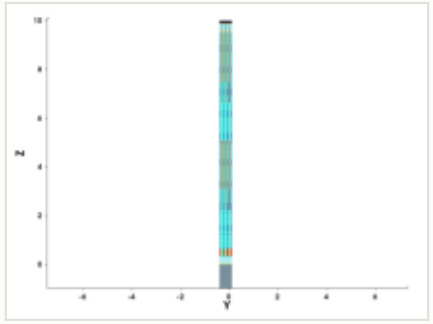

y cut at -0.150 µm

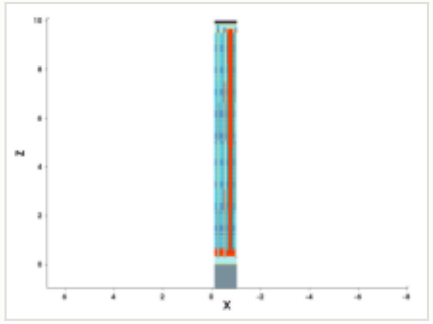

mask for this step

no mask for this step

steps by process area

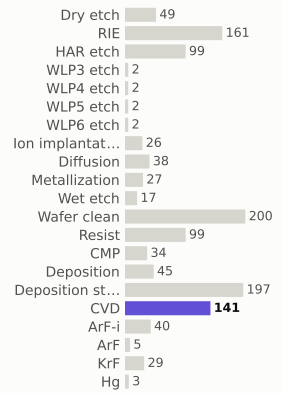

materials deposited (g)

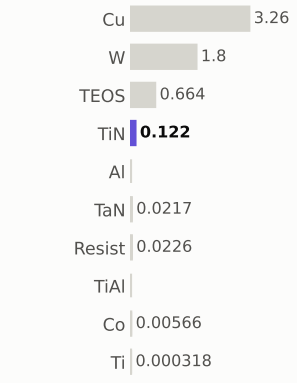

gases emitted (g)

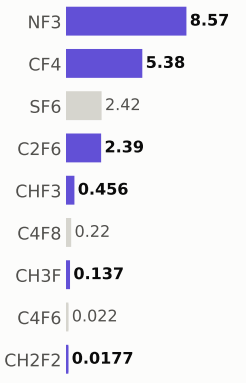

Step #20950: CVD

depo_isotropic · CVD

1.31	1,120.7	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

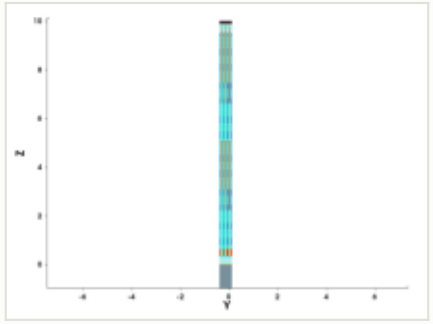

y cut at -0.150 µm

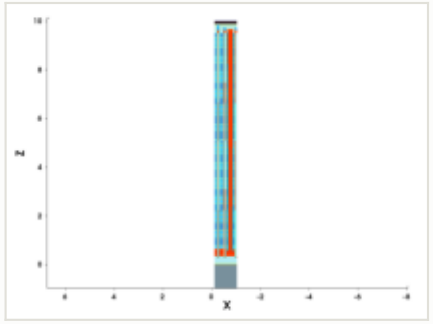

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

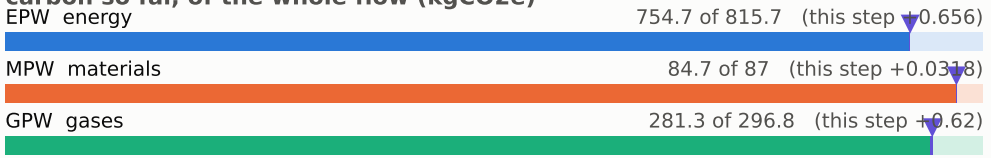

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

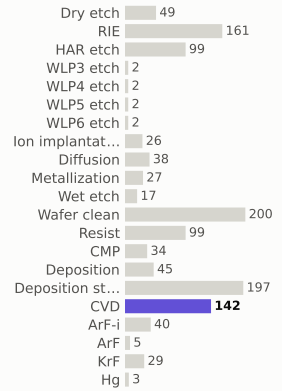

materials deposited (g)

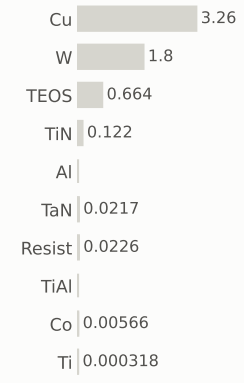

gases emitted (g)

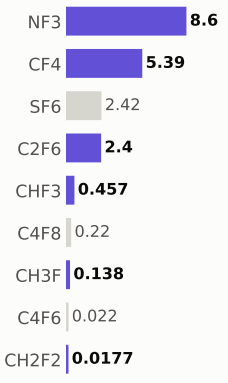

Step #20960: CVD

depo_isotropic · CVD

1.31	1,122.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

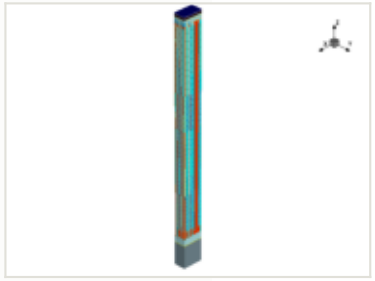

x cut at -0.570 µm

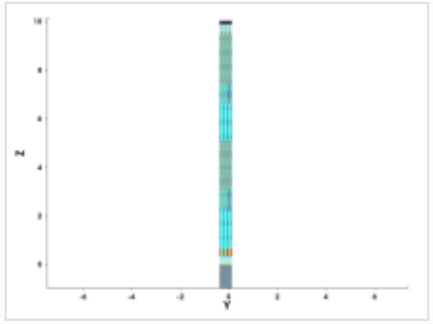

y cut at -0.150 µm

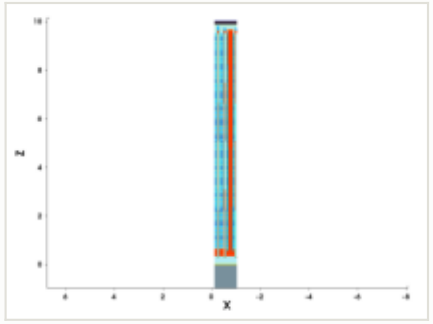

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.02 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0321 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

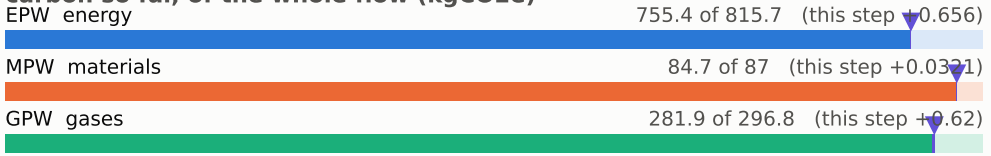

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

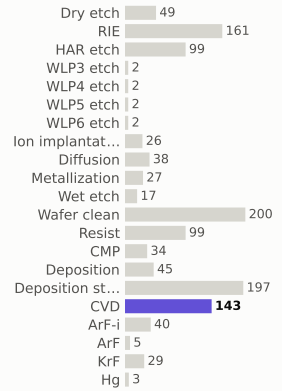

materials deposited (g)

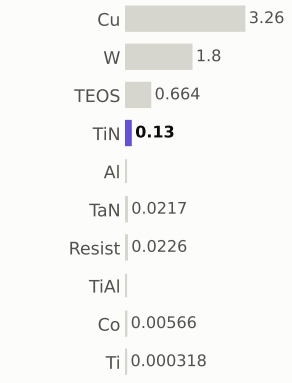

gases emitted (g)

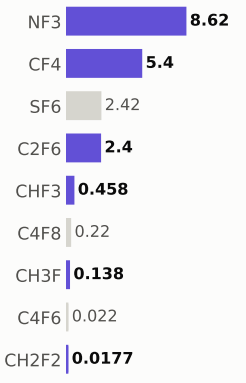

Step #20970: CVD

depo_isotropic · CVD

1.31	1,123.3	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

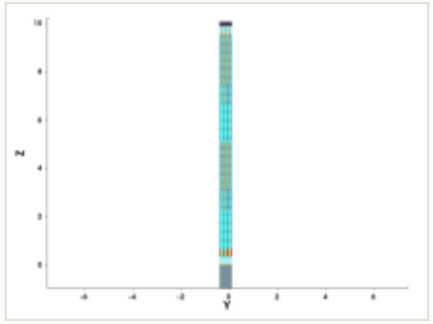

y cut at -0.150 µm

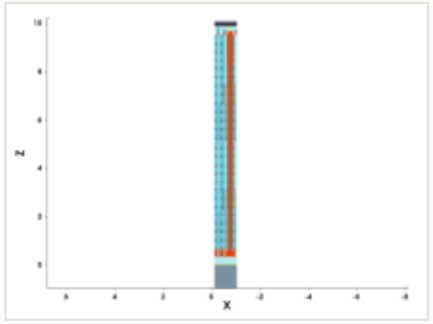

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.07 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

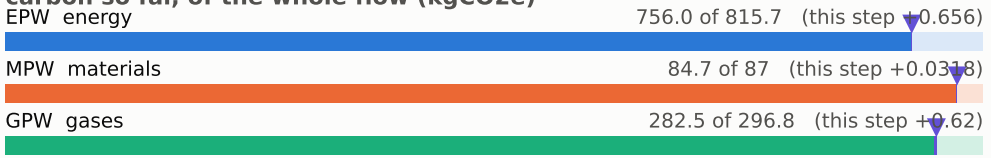

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

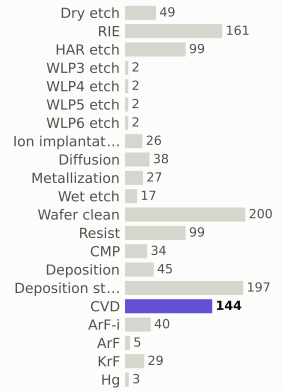

materials deposited (g)

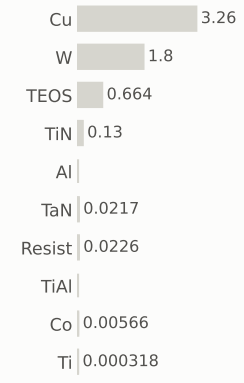

gases emitted (g)

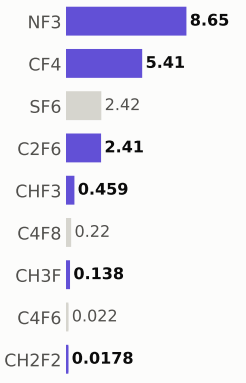

Step #20980: CVD

depo_isotropic · CVD

1.31	1,124.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

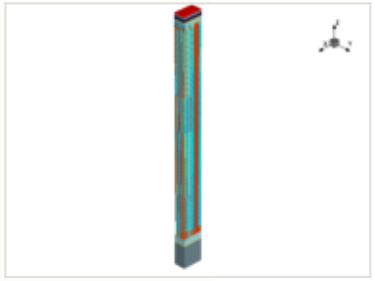

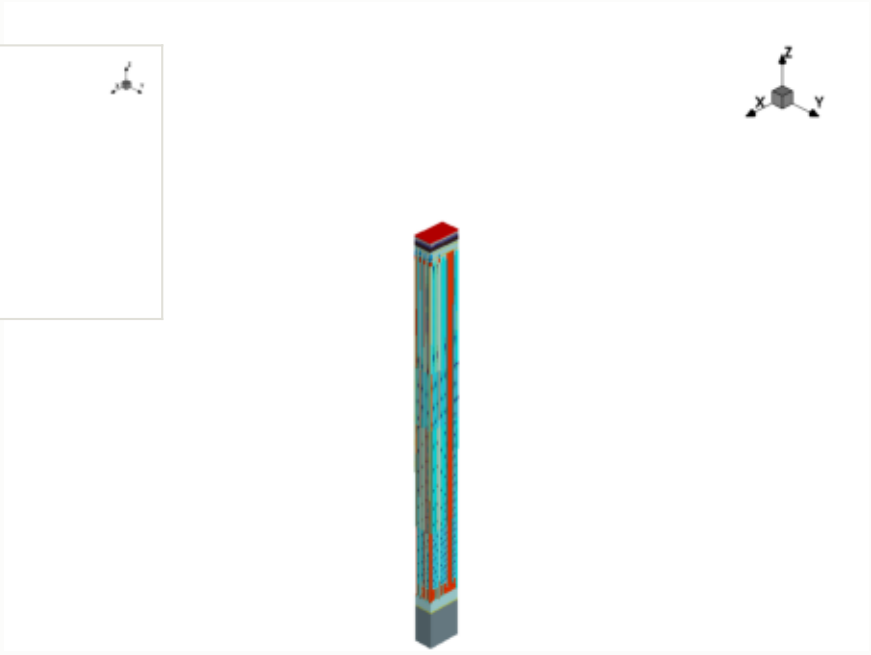

x cut at -0.570 µm

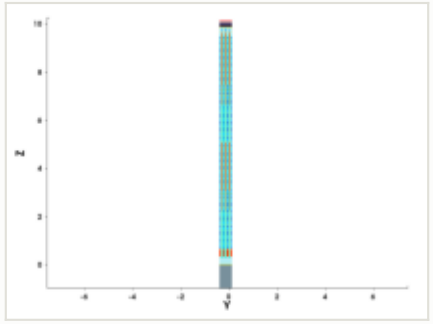

y cut at -0.150 µm

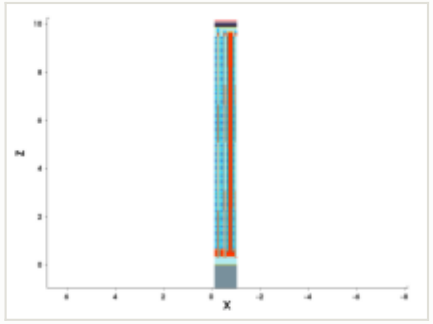

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

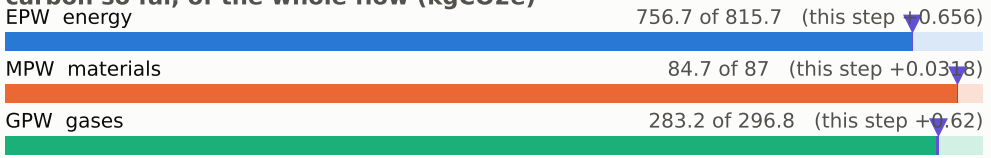

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

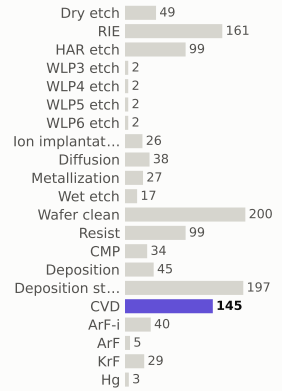

materials deposited (g)

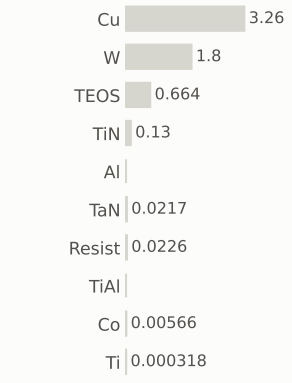

gases emitted (g)

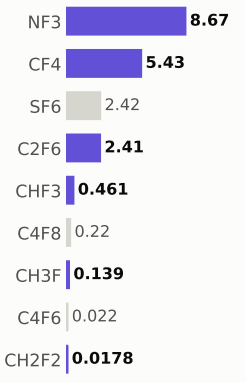

Step #20990: Wafer_clean

clean · Wafer_clean

0.169	1,124.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

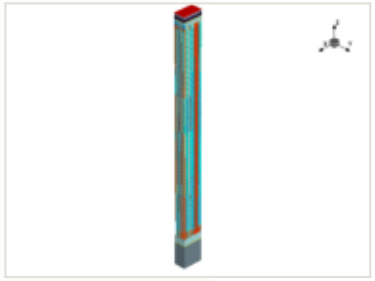

x cut at -0.570 µm

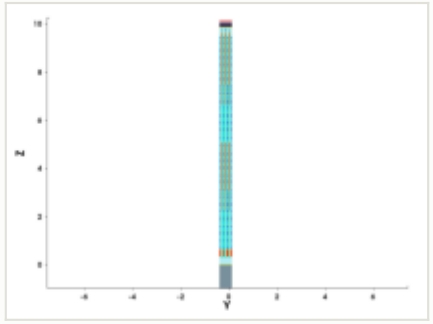

y cut at -0.150 µm

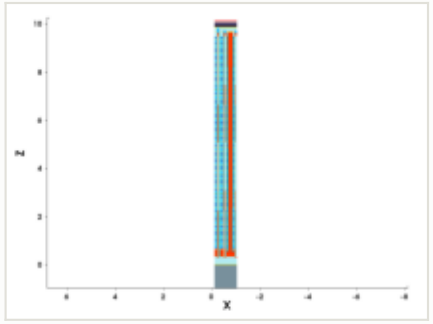

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

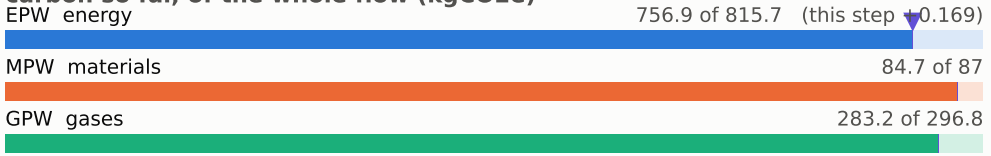

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

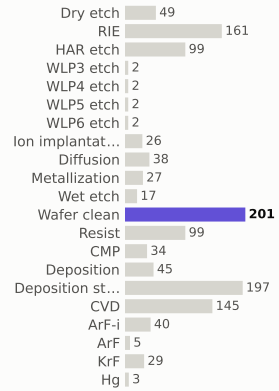

materials deposited (g)

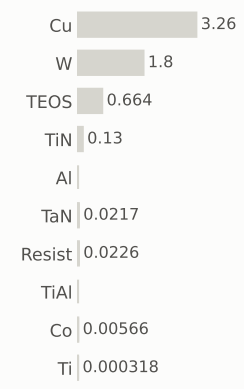

gases emitted (g)

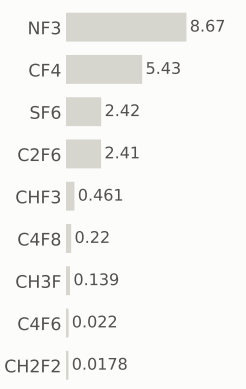

Step #21000: ArF-i

litho_patterning · ArF-i

0.217	1,125.0	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

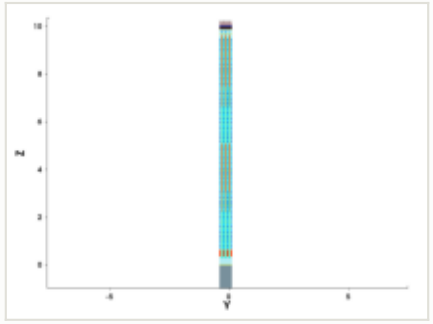

y cut at -0.150 µm

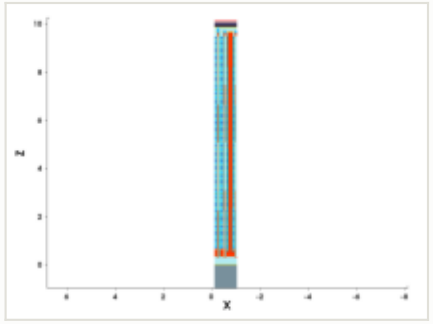

mask: layer 43:0, positive (GDSII)

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

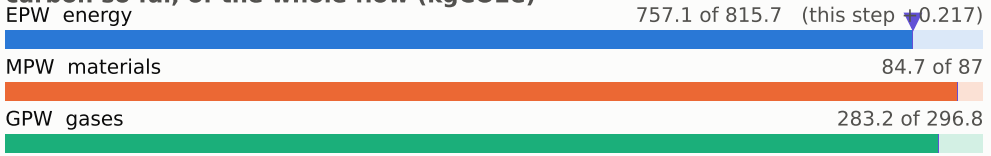

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)

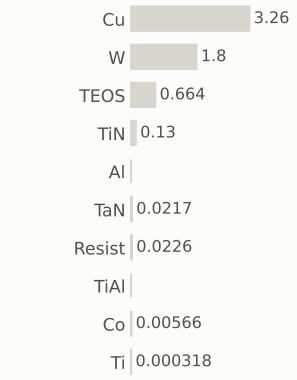

gases emitted (g)

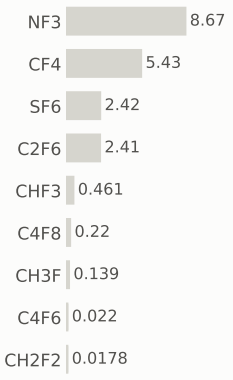

Step #21010: RIE

etch_isotropic · RIE

1.04	1,126.0	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

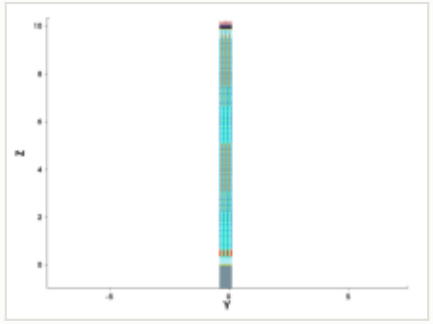

y cut at -0.150 µm

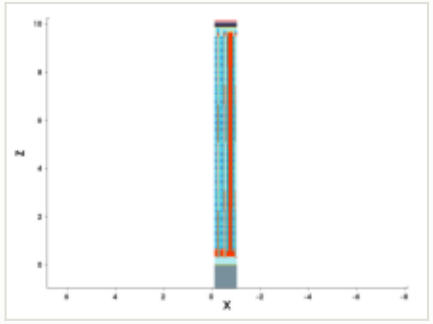

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

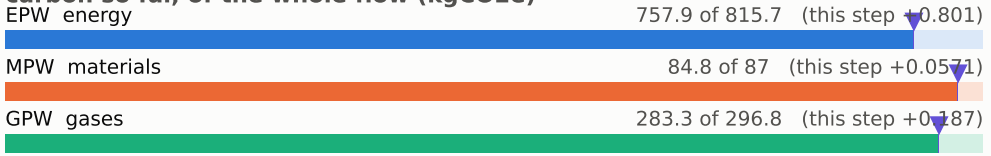

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

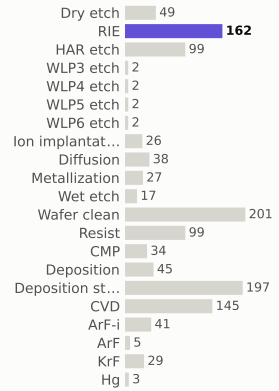

materials deposited (g)

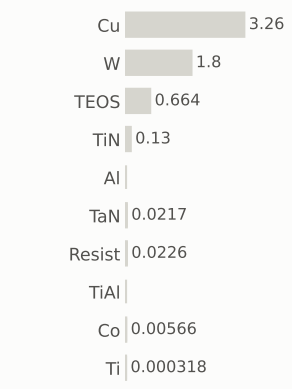

gases emitted (g)

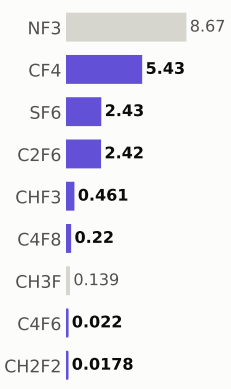

Step #21020: RIE

etch_anisotropic · RIE

1.04	1,127.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

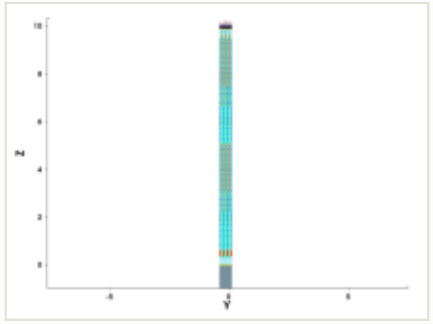

y cut at -0.150 µm

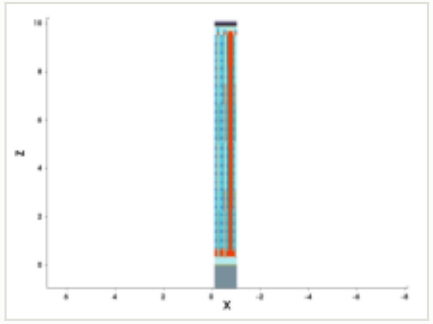

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

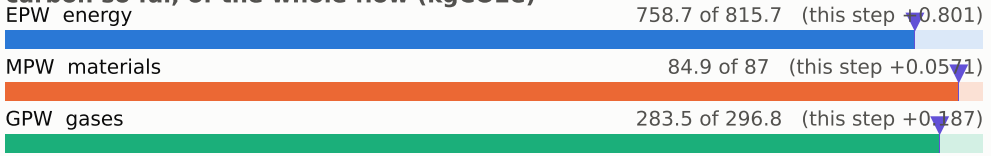

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

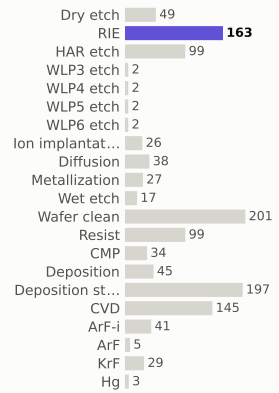

materials deposited (g)

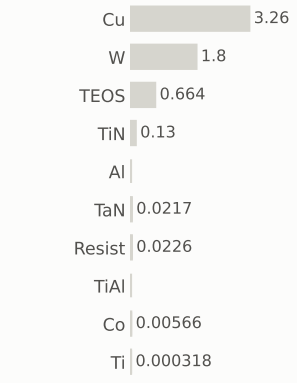

gases emitted (g)

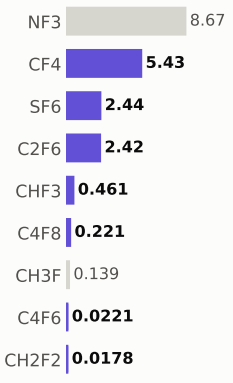

Step #21030: RIE

etch_anisotropic · RIE

1.04	1,128.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at -0.570 µm

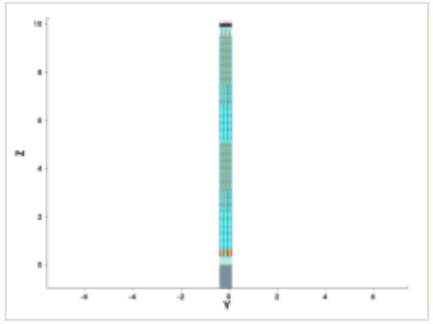

y cut at -0.150 µm

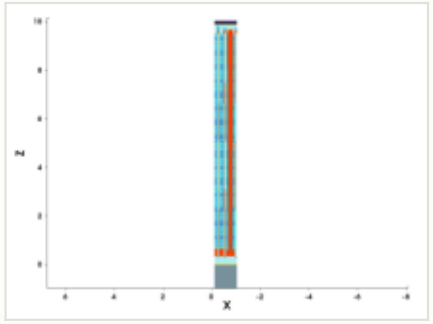

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

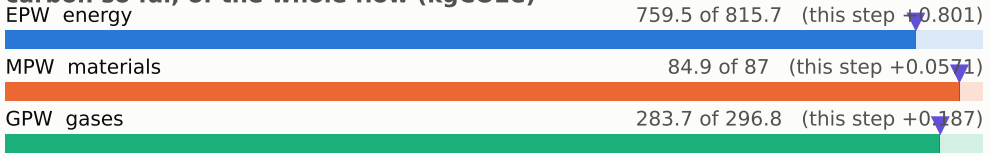

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

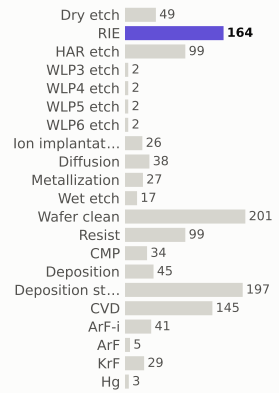

materials deposited (g)

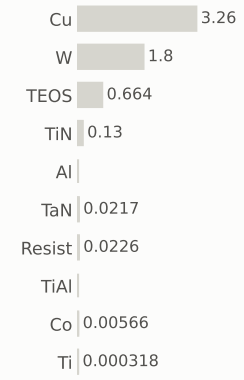

gases emitted (g)

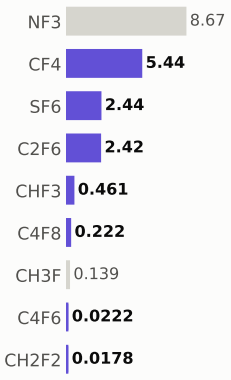

Step #21040: Dry_etch

etch_strip · Dry_etch

0.801	1,128.9	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

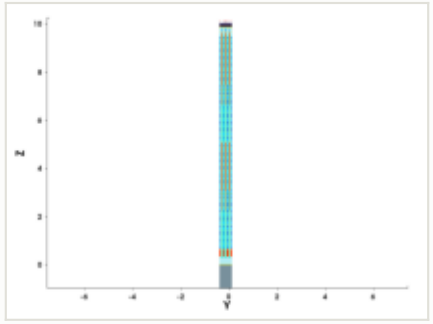

y cut at -0.150 µm

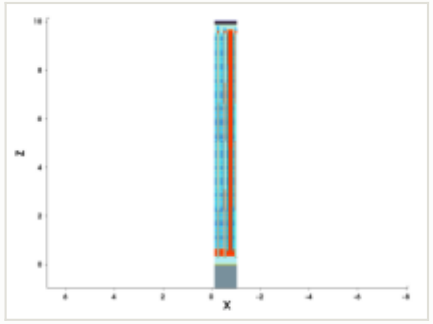

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

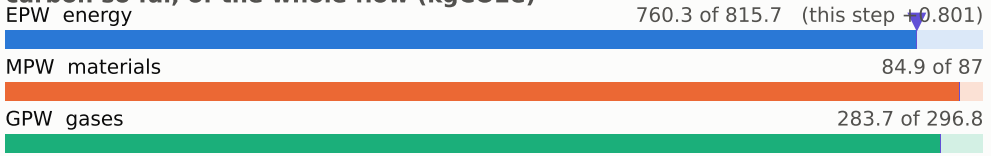

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

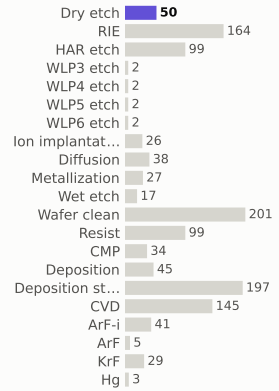

materials deposited (g)

gases emitted (g)

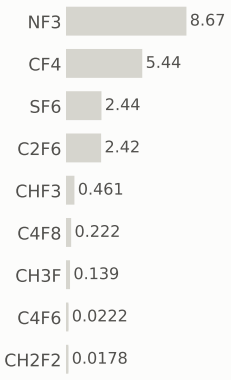

Step #21050: CVD

depo_isotropic · CVD

1.31	1,130.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

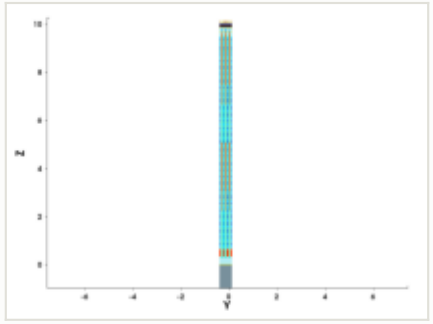

y cut at -0.150 µm

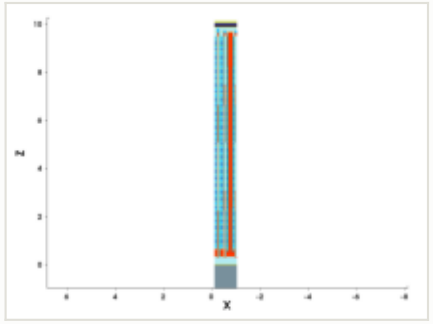

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.016 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

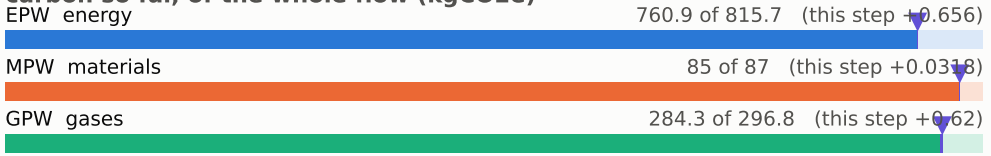

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

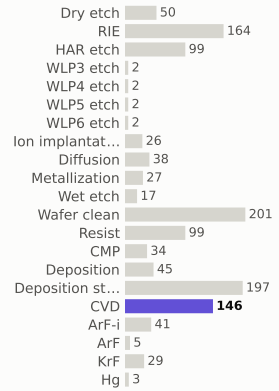

materials deposited (g)

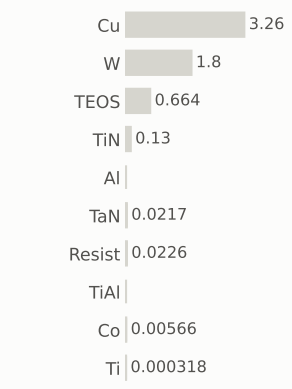

gases emitted (g)

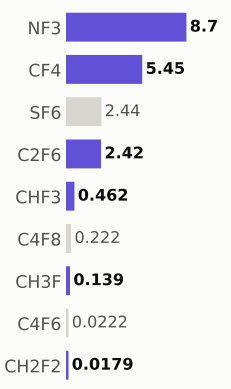

Step #21060: RIE

etch_anisotropic · RIE

1.04	1,131.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at -0.570 µm

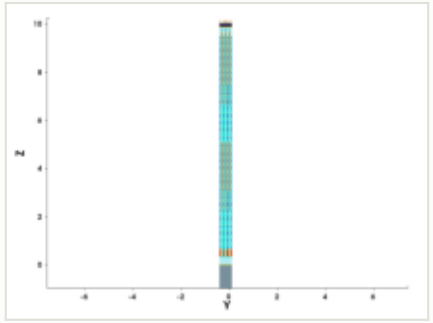

y cut at -0.150 µm

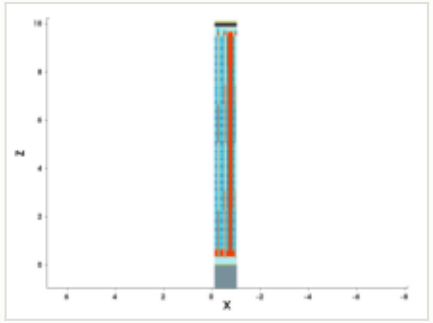

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

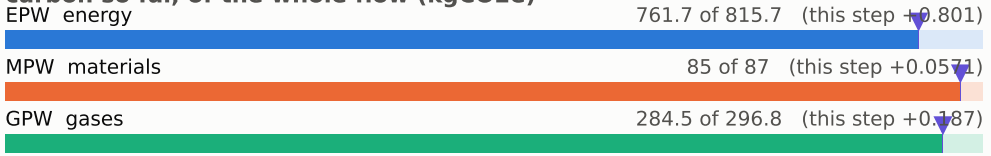

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

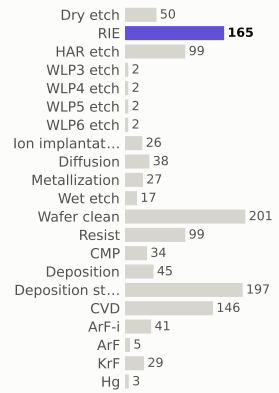

materials deposited (g)

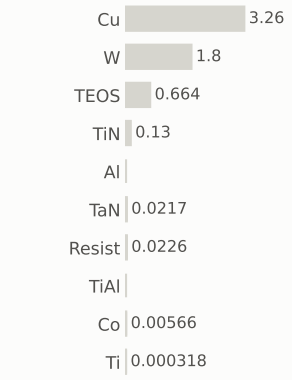

gases emitted (g)

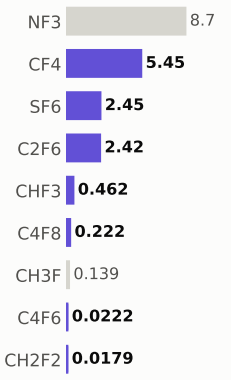

Step #21070: RIE

etch_anisotropic · RIE

1.04	1,132.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

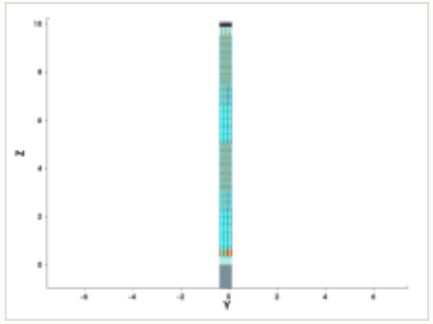

y cut at -0.150 µm

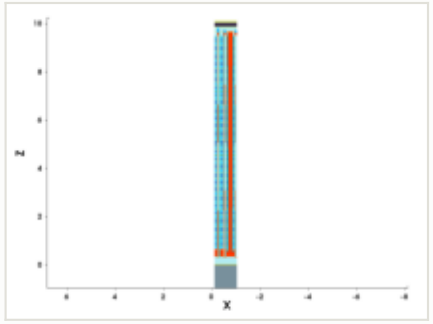

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

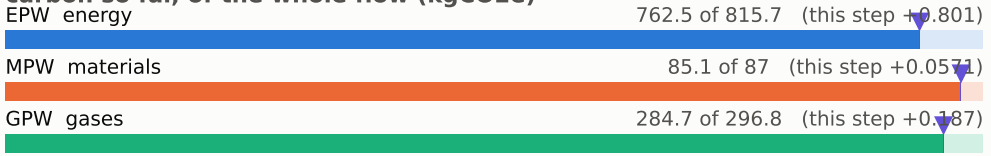

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

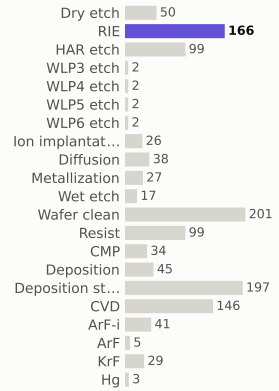

materials deposited (g)

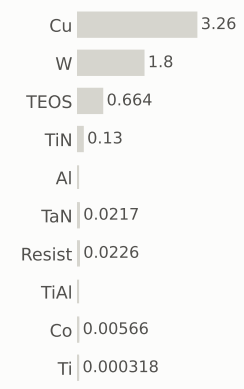

gases emitted (g)

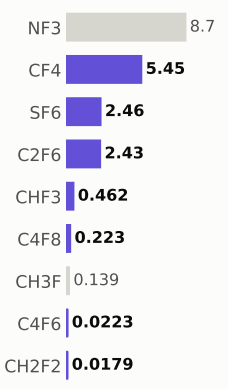

Step #21080: RIE

etch_anisotropic · RIE

1.04	1,133.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

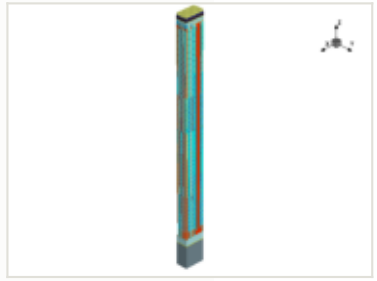

x cut at -0.570 µm

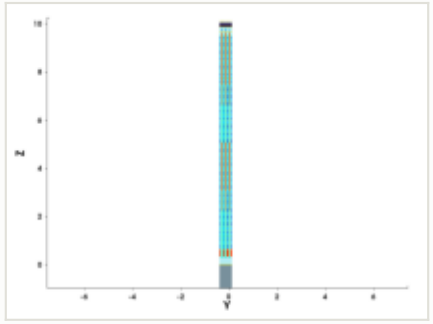

y cut at -0.150 µm

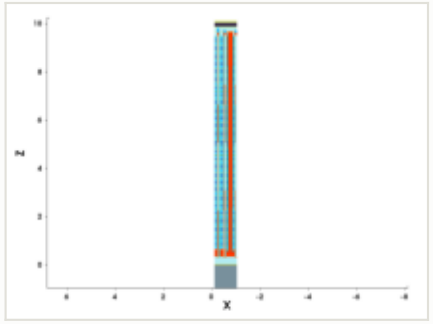

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

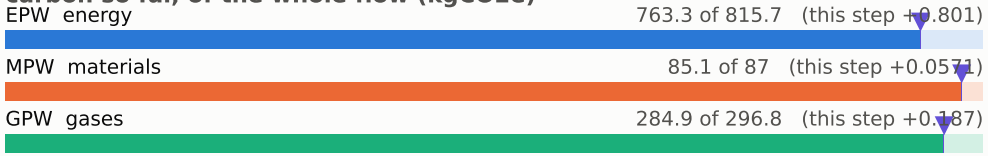

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

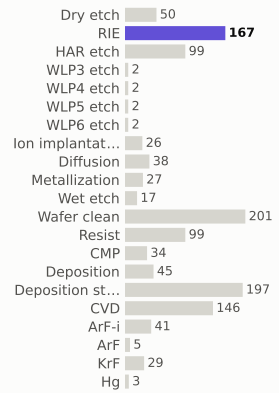

materials deposited (g)

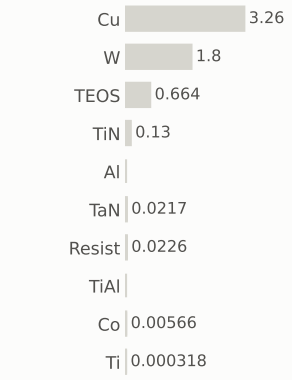

gases emitted (g)

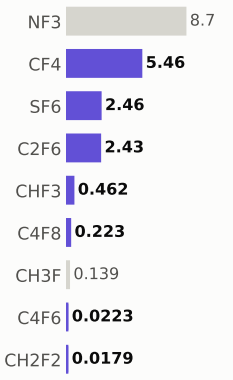

Step #21090: Resist

depo_sog · Resist

0.169	1,133.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

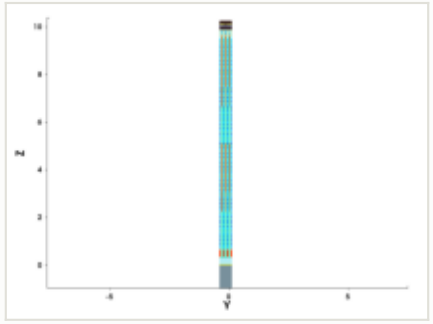

y cut at -0.150 µm

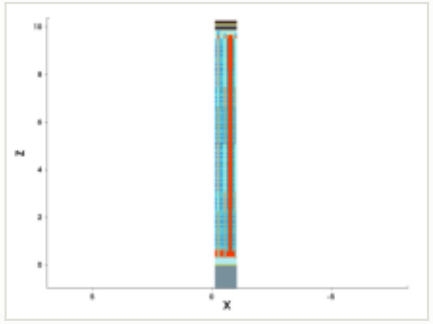

mask for this step

no mask for this step

this step

process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

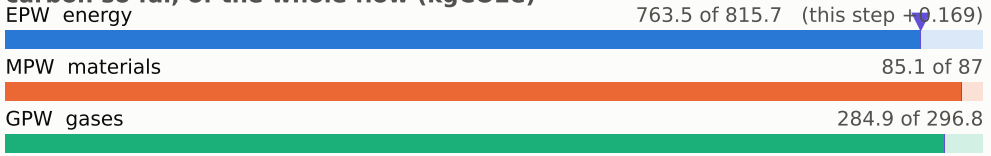

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

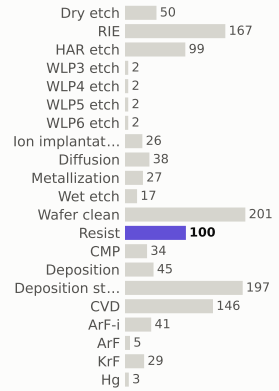

materials deposited (g)

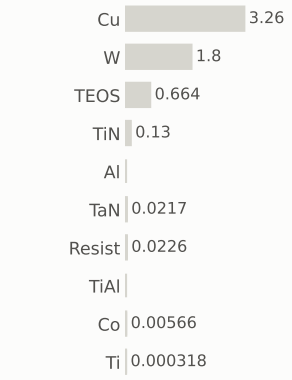

gases emitted (g)



Step #21100: CVD

depo_isotropic · CVD

1.31	1,134.8	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

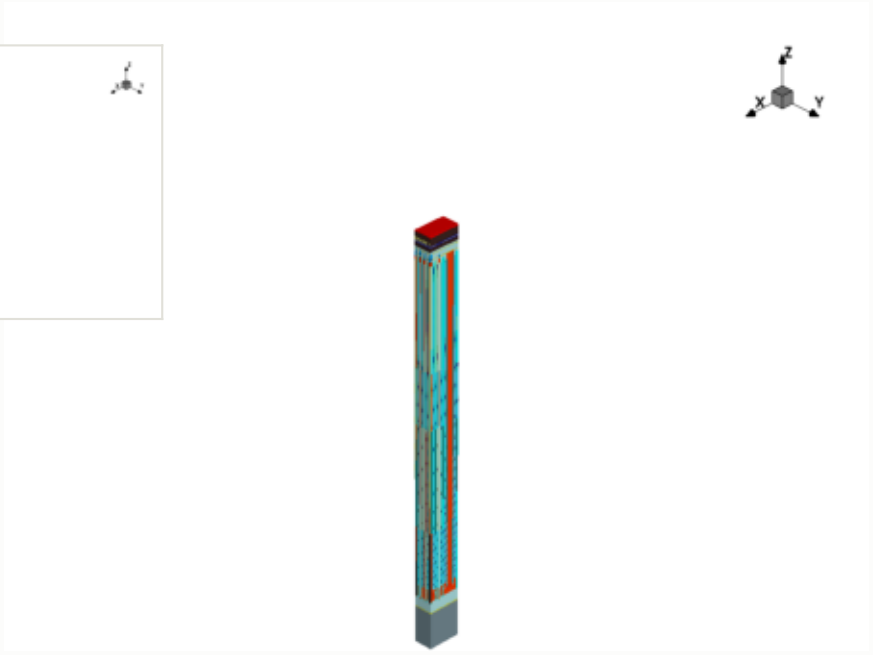

x cut at -0.570 µm

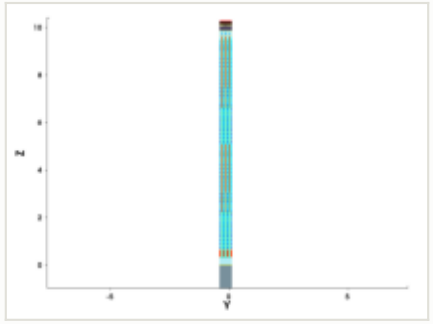

y cut at -0.150 µm

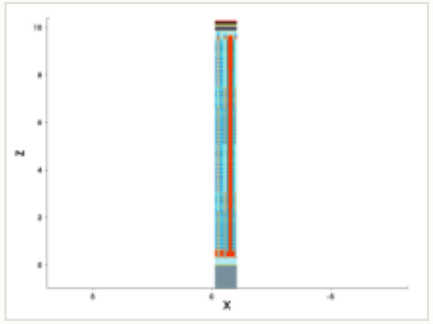

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

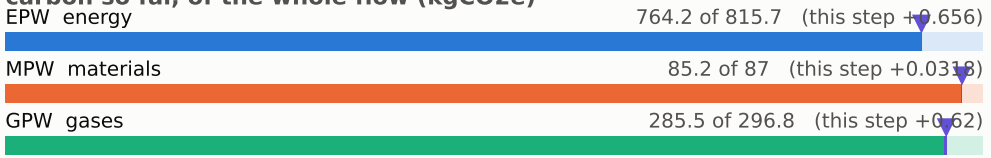

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

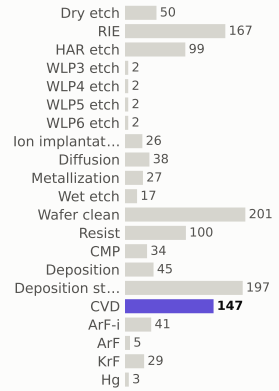

materials deposited (g)

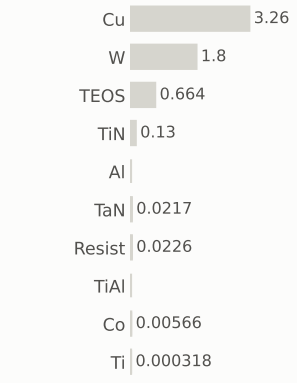

gases emitted (g)

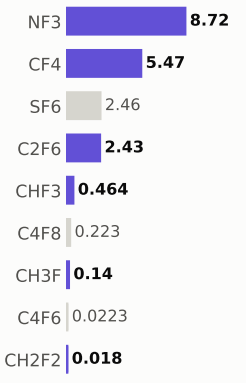

Step #21110: Wafer_clean

clean · Wafer_clean

0.169	1,135.0	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

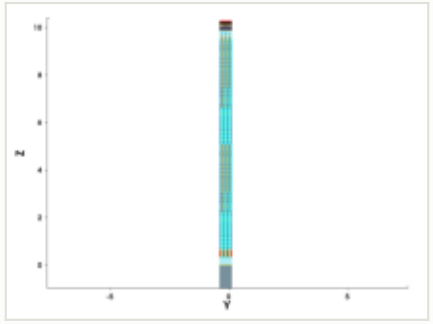

y cut at -0.150 µm

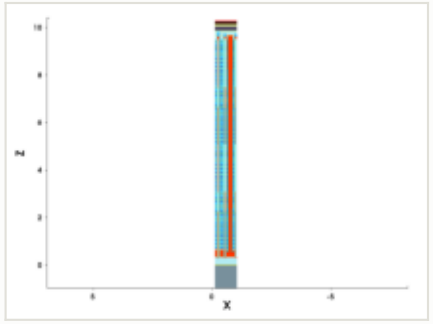

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

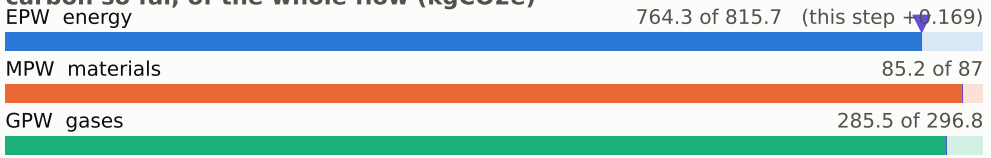

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

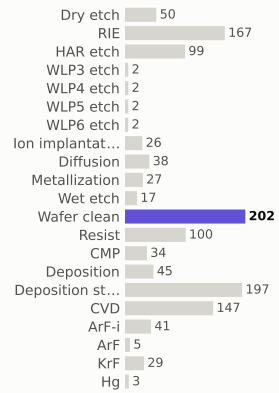

materials deposited (g)

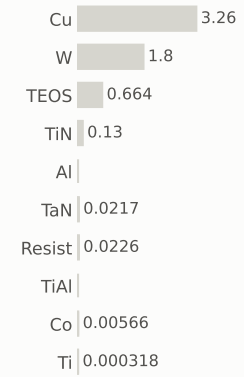

gases emitted (g)

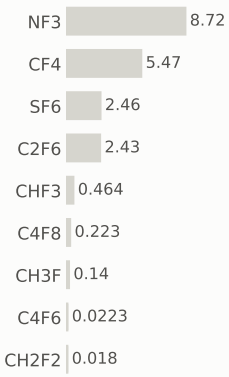

Step #21120: ArF-i

litho_patterning · ArF-i

0.217	1,135.2	0.018%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

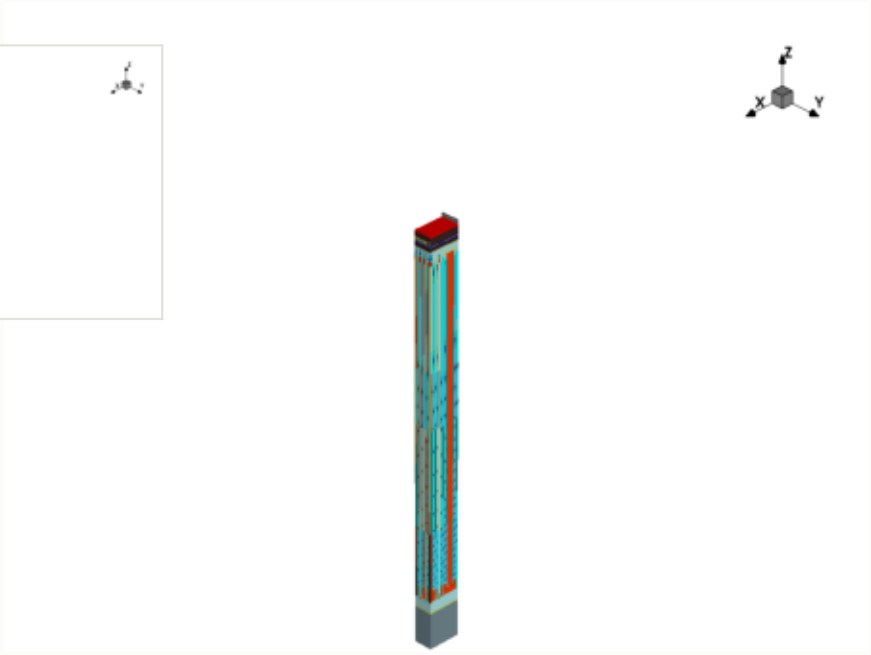

x cut at -0.570 µm

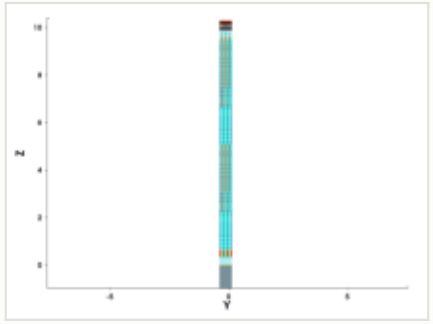

y cut at -0.150 µm

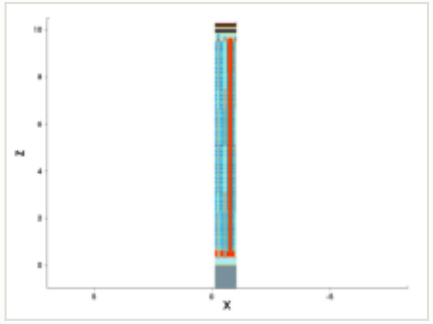

mask: layer 44:0, negative (GDSII)

this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

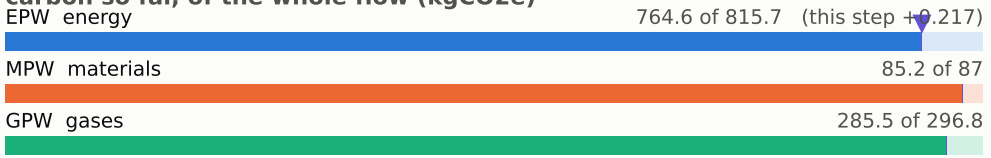

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

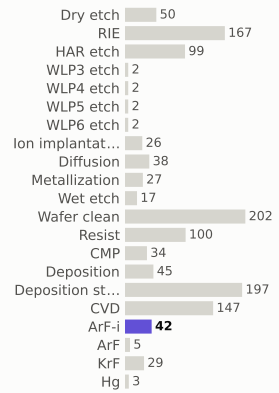

materials deposited (g)

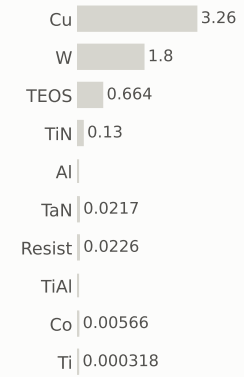

gases emitted (g)

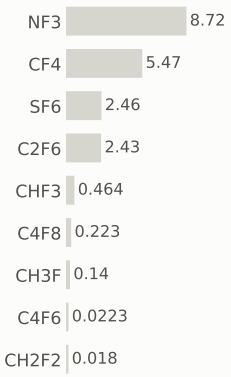

Step #21130: RIE

etch_anisotropic · RIE

1.04	1,136.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

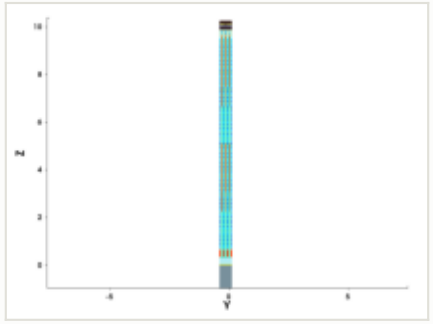

y cut at -0.150 µm

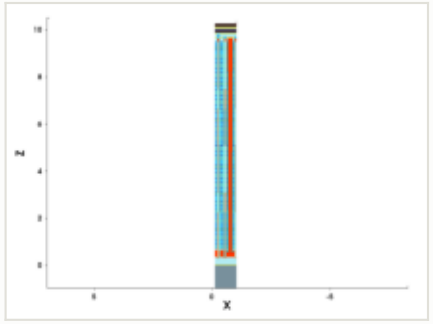

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

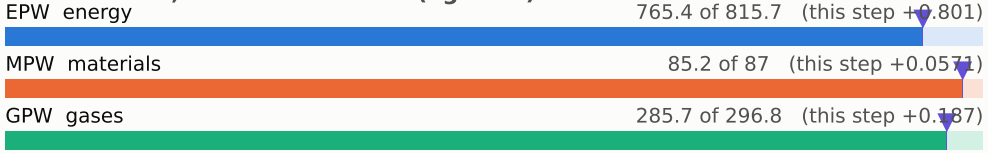

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

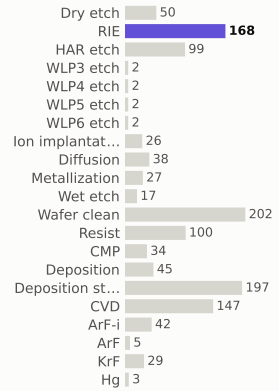

materials deposited (g)

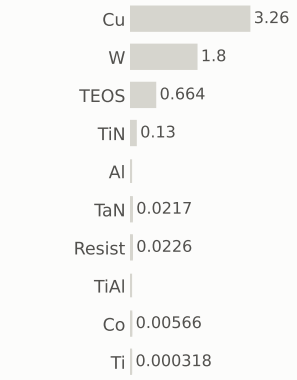

gases emitted (g)

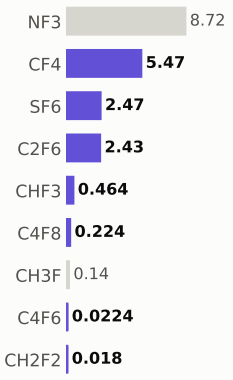

Step #21140: RIE

etch_anisotropic · RIE

1.04	1,137.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

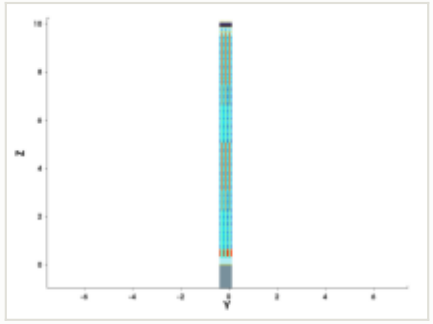

y cut at -0.150 µm

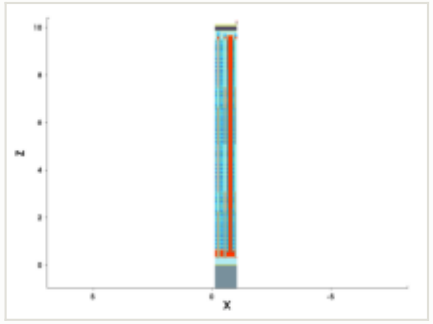

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

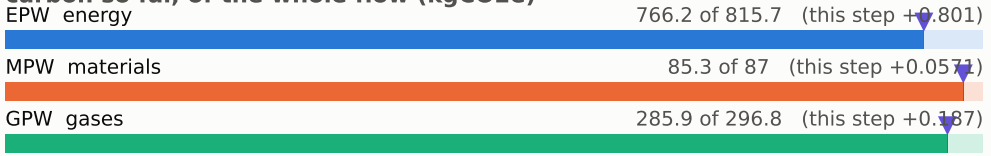

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

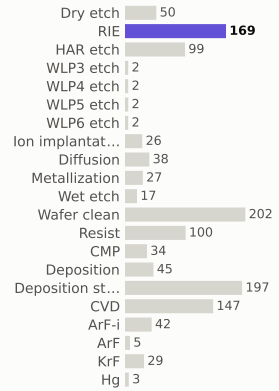

materials deposited (g)

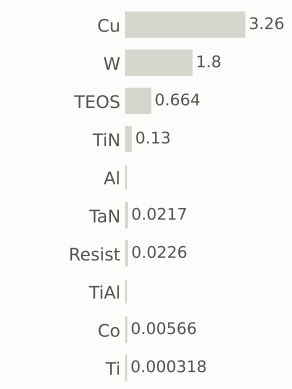

gases emitted (g)

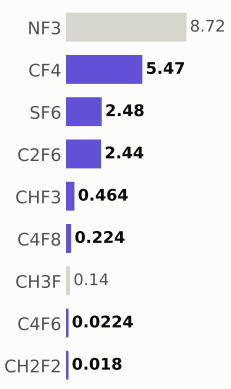

Step #21150: RIE

etch_anisotropic · RIE

1.04	1,138.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

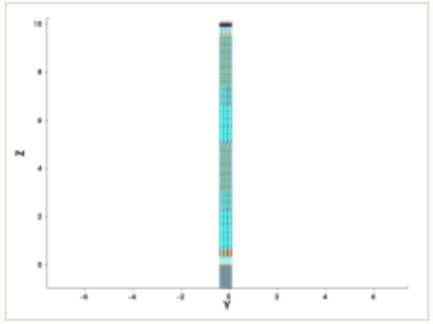

y cut at -0.150 µm

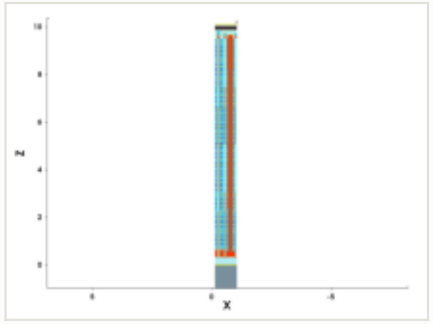

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

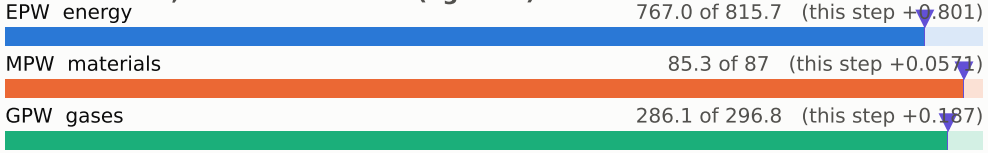

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

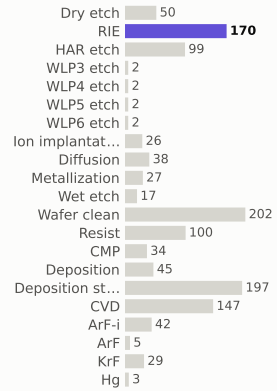

materials deposited (g)

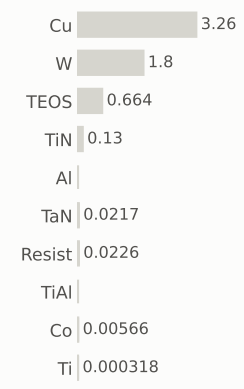

gases emitted (g)

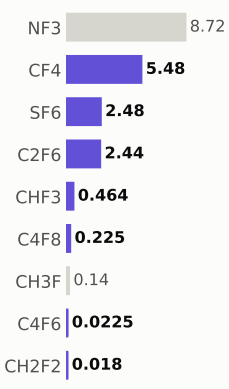

Step #21160: RIE

etch_anisotropic · RIE

1.04	1,139.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

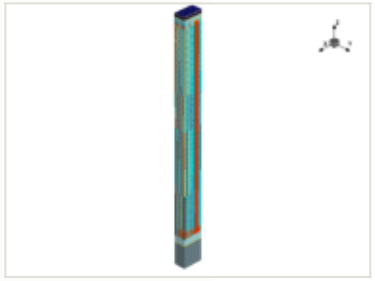

x cut at -0.570 µm

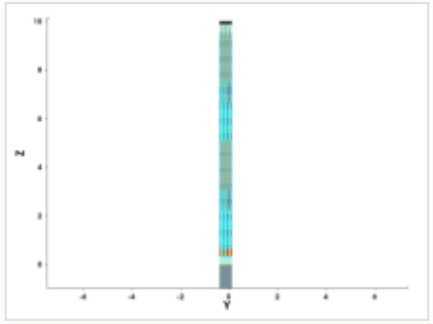

y cut at -0.150 µm

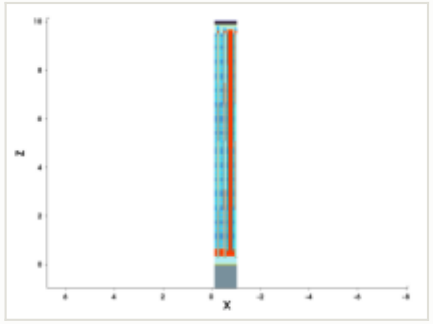

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

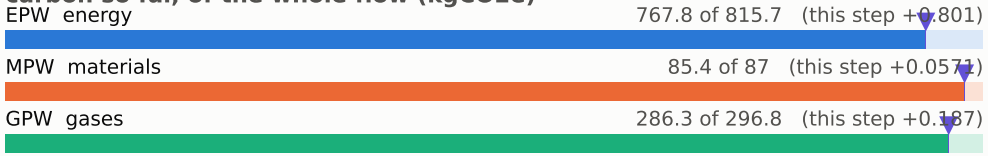

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

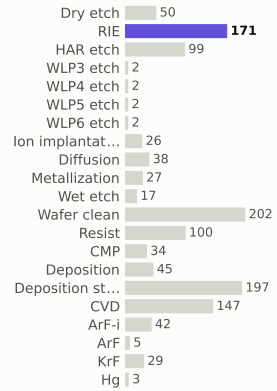

materials deposited (g)

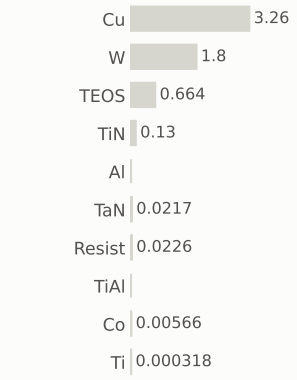

gases emitted (g)

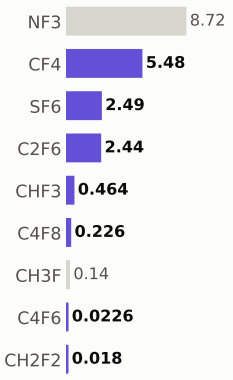

Step #21170: RIE

etch_anisotropic · RIE

1.04	1,140.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

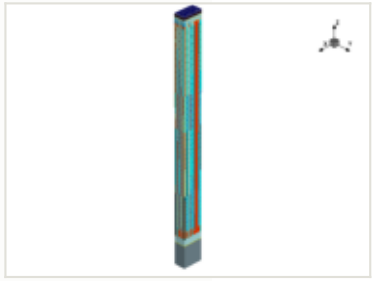

x cut at -0.570 µm

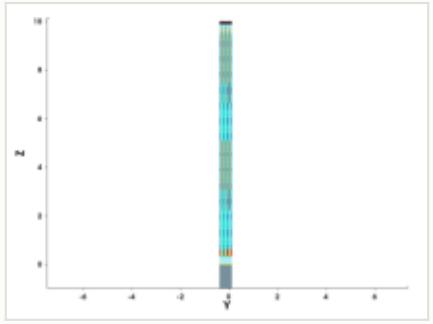

y cut at -0.150 µm

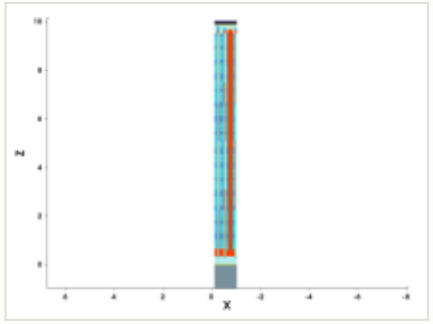

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

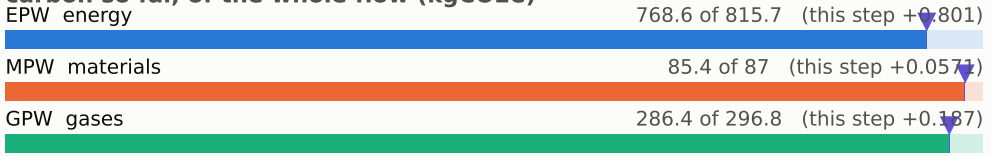

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

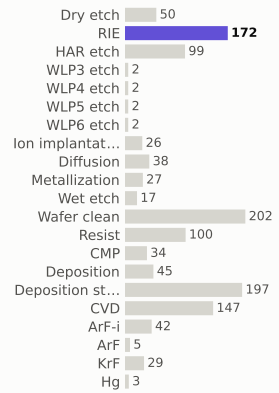

materials deposited (g)

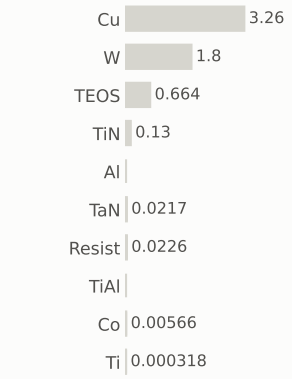

gases emitted (g)

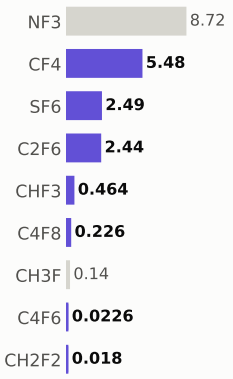

Step #21180: RIE

etch_anisotropic · RIE

1.04	1,141.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

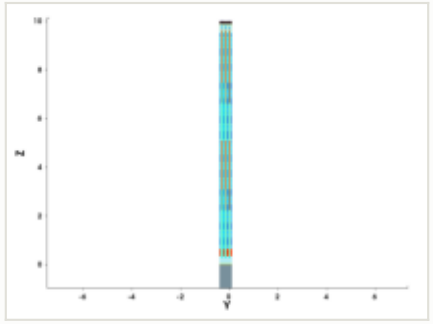

y cut at -0.150 µm

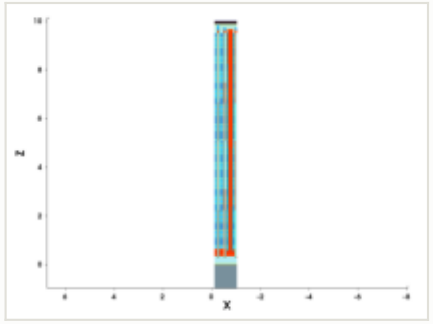

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

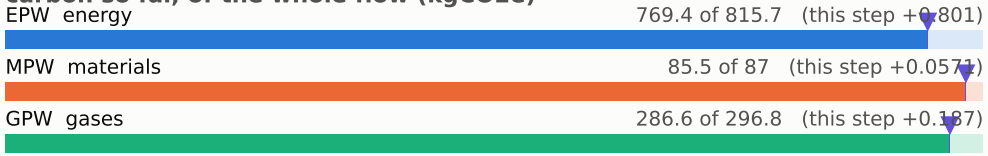

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

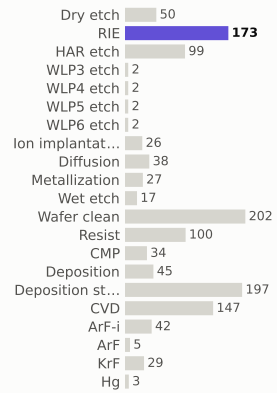

materials deposited (g)

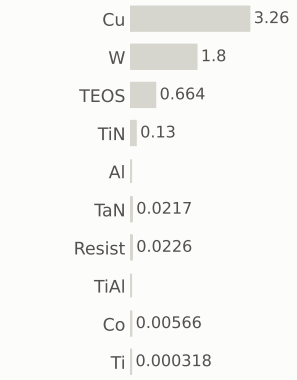

gases emitted (g)

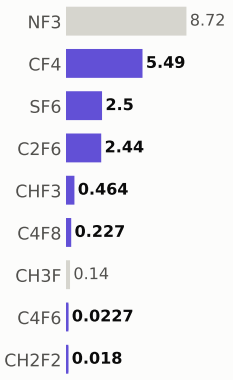

Step #21190: RIE

etch_anisotropic · RIE

1.04	1,142.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

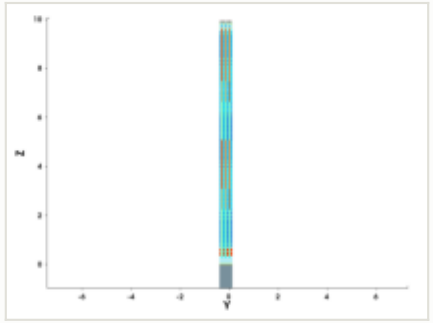

y cut at -0.150 µm

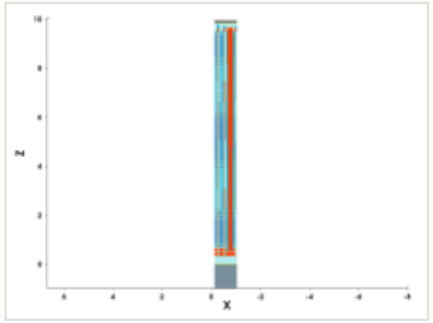

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

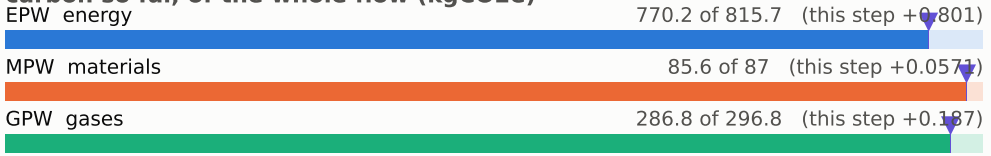

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

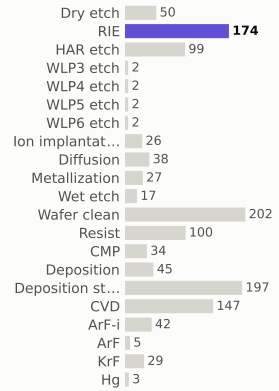

materials deposited (g)

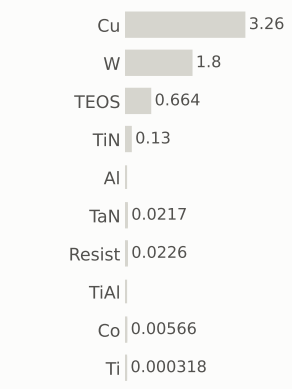

gases emitted (g)

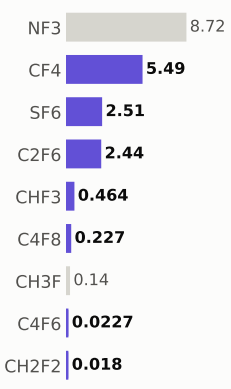

Step #21200: RIE

etch_anisotropic · RIE

1.04	1,143.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

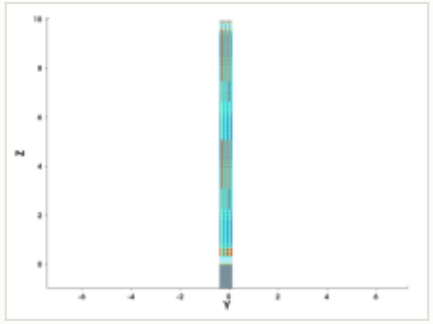

y cut at -0.150 µm

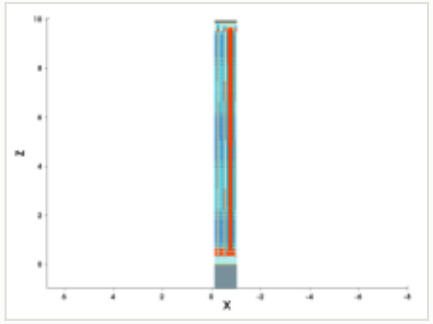

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

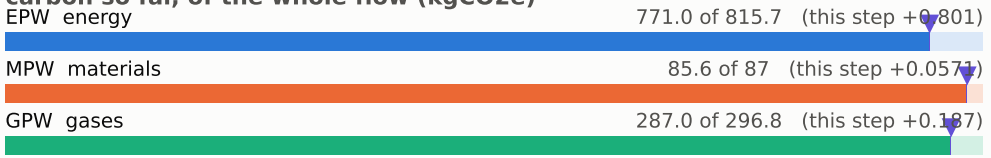

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

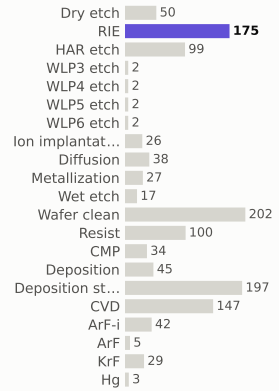

materials deposited (g)

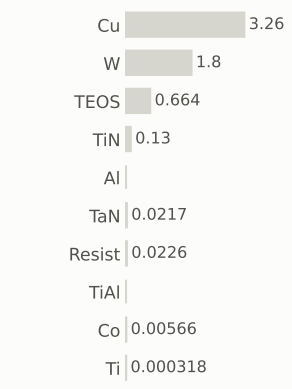

gases emitted (g)

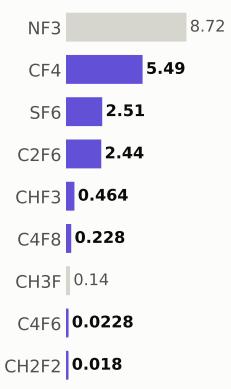

Step #21210: RIE

etch_anisotropic · RIE

1.04	1,144.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

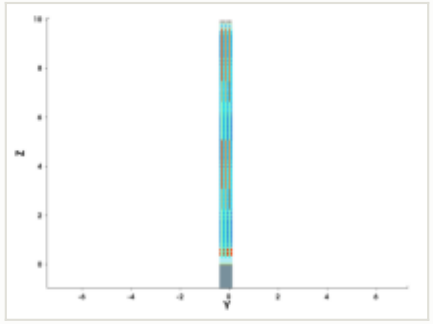

y cut at -0.150 µm

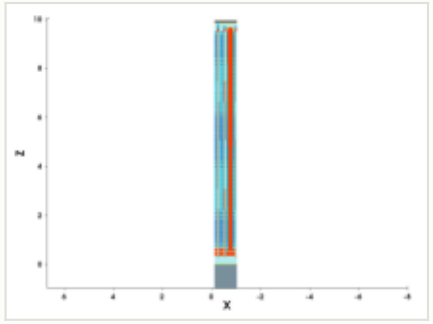

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

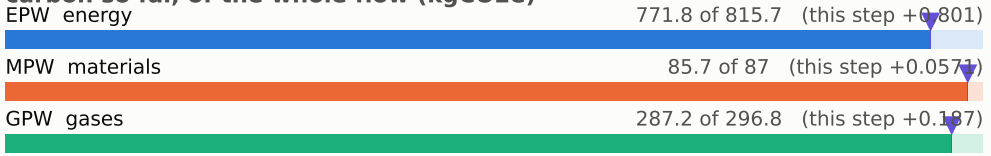

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

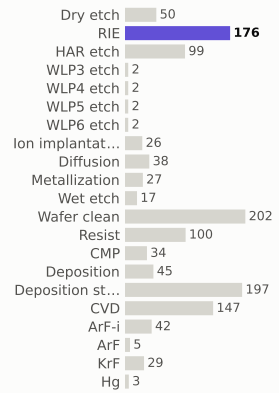

materials deposited (g)

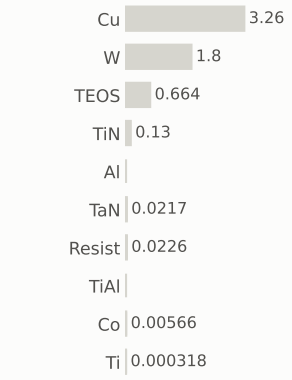

gases emitted (g)

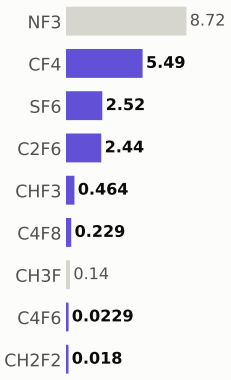

Step #21220: Dry_etch

etch_strip · Dry_etch

0.801	1,145.4	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

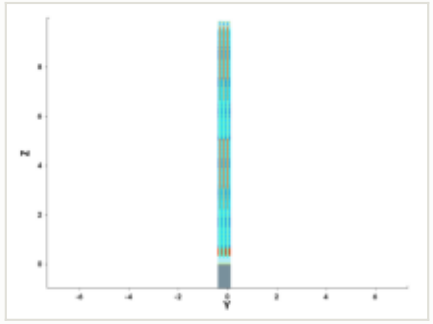

y cut at -0.150 µm

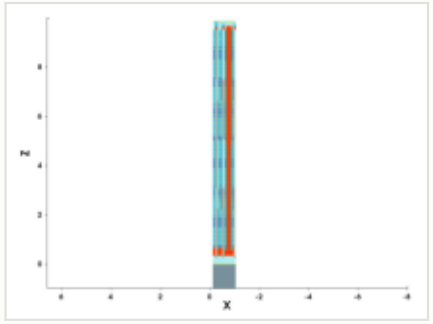

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

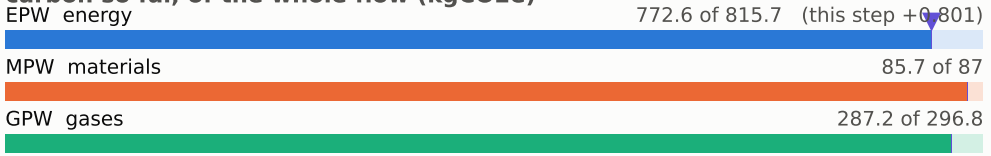

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

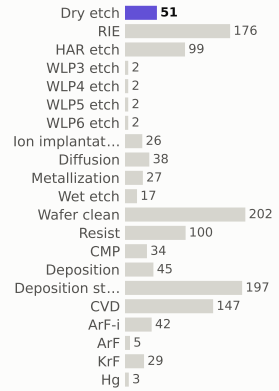

materials deposited (g)

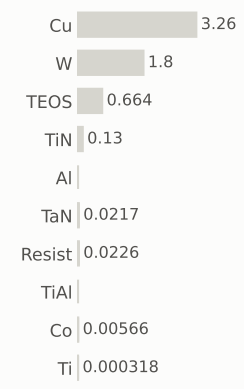

gases emitted (g)

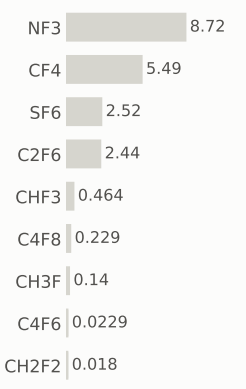

Step #21230: Wafer_clean

clean · Wafer_clean

0.169	1,145.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

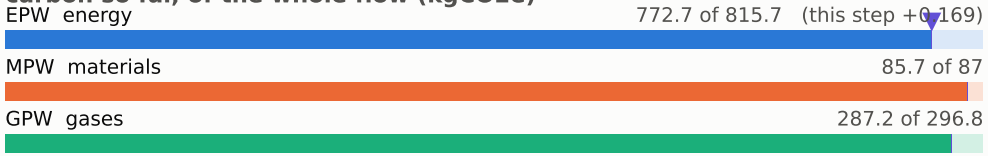

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

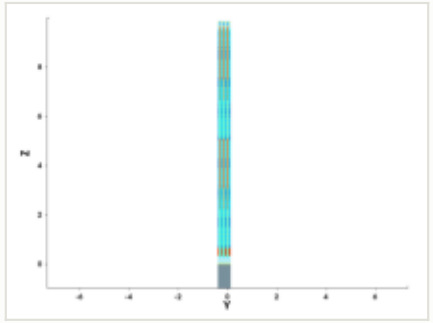

y cut at -0.150 µm

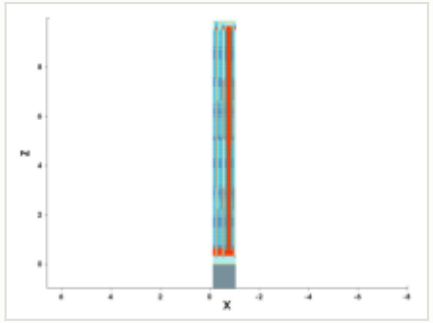

mask for this step

no mask for this step

steps by process area

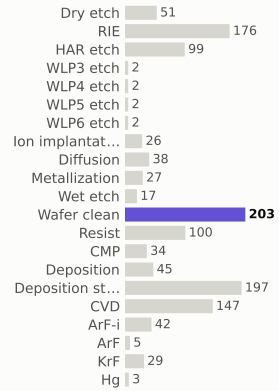

materials deposited (g)

gases emitted (g)

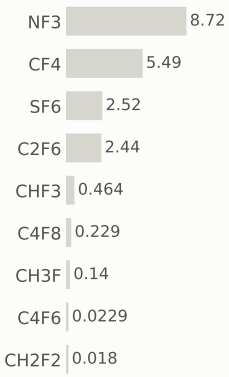

Step #21240: Deposition

depo_ellipsoidal · Deposition

0.656	1,146.3	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition
material	TaN
thickness	0.01 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.00025 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

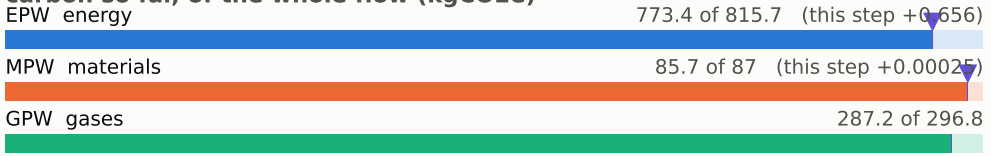

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

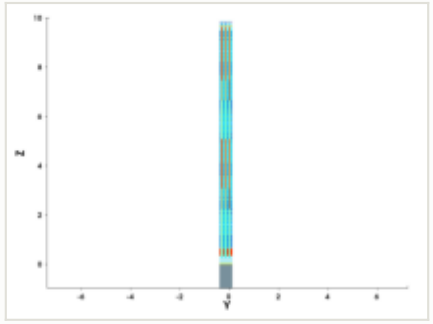

y cut at -0.150 µm

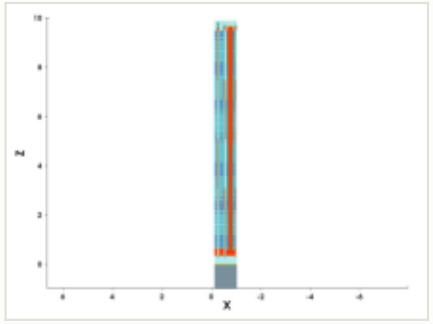

mask for this step

no mask for this step

steps by process area

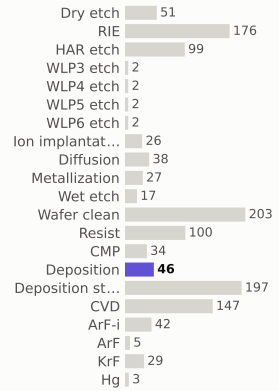

materials deposited (g)

gases emitted (g)

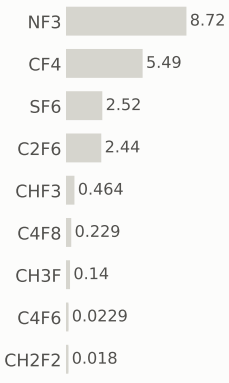

Step #21250: Metallization

depo_isotropic · Metallization

1.2	1,147.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

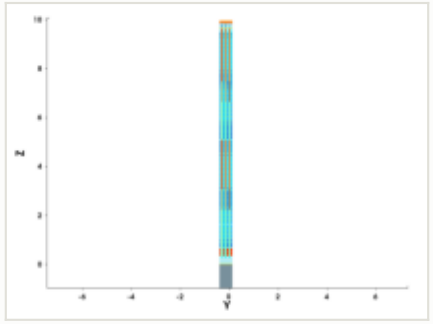

y cut at -0.150 µm

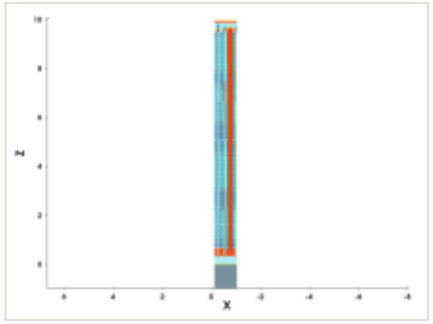

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.07 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00027 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

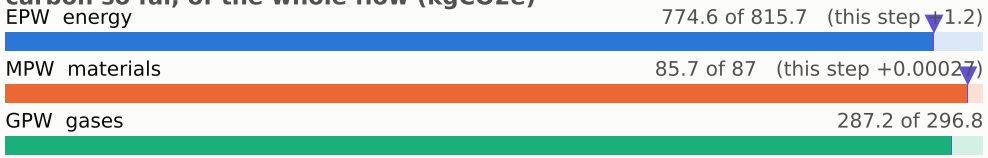

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

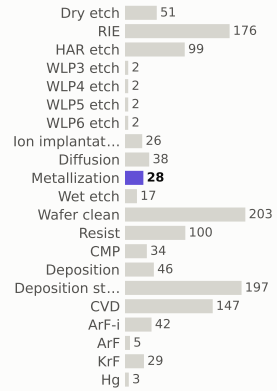

materials deposited (g)

gases emitted (g)

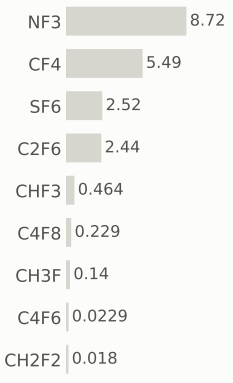

Step #21260: Diffusion

anneal · Diffusion

0.801	1,148.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

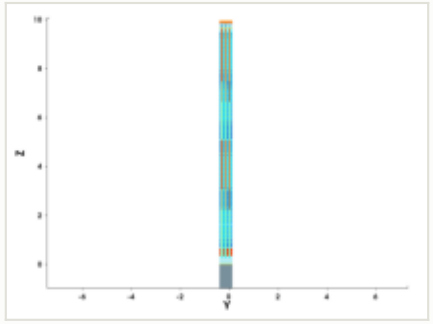

y cut at -0.150 µm

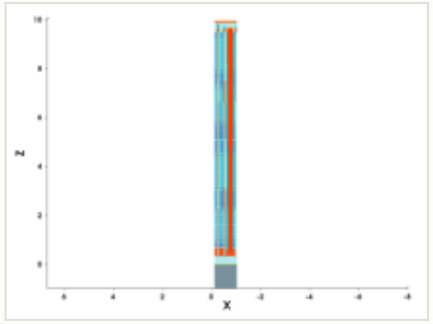

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

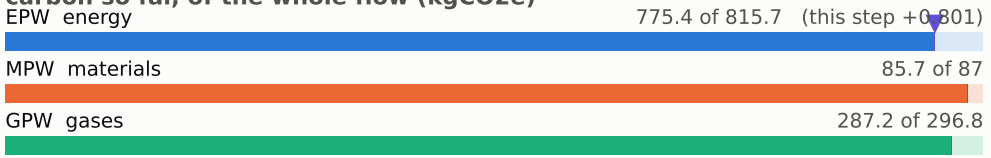

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

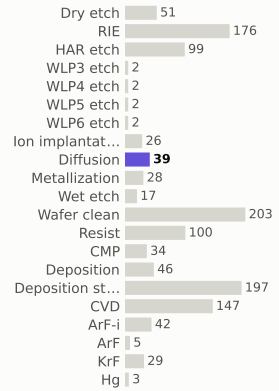

materials deposited (g)



gases emitted (g)

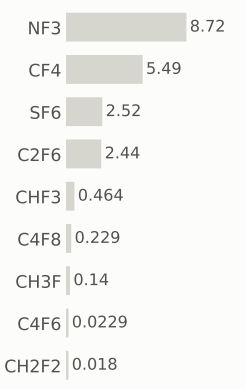

Step #21270: CMP

etch_cmp · CMP

0.169	1,148.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

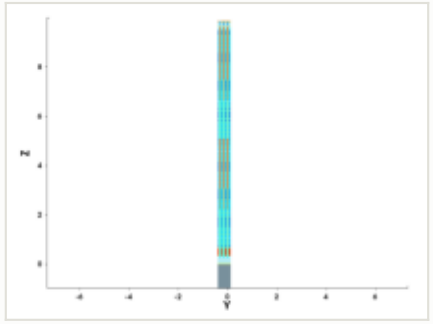

y cut at -0.150 µm

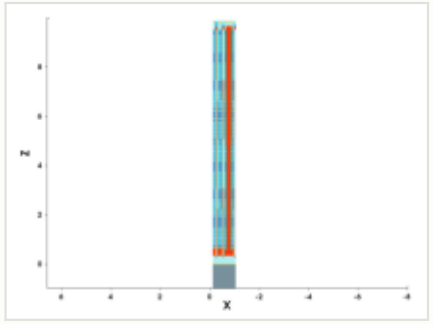

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

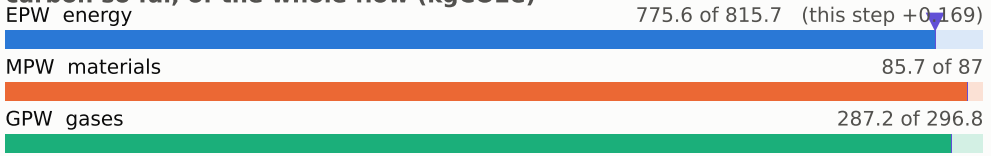

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

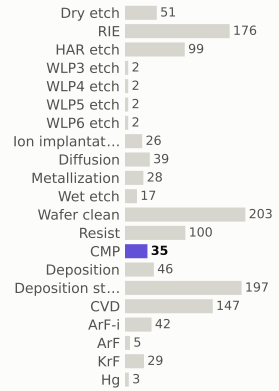

materials deposited (g)



gases emitted (g)

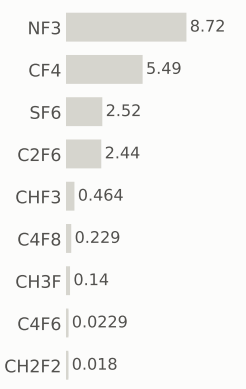

Step #21280: Wafer_clean

clean · Wafer_clean

0.169	1,148.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

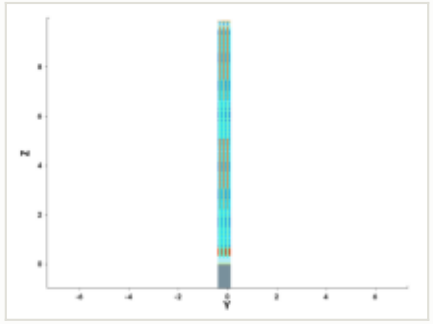

y cut at -0.150 µm

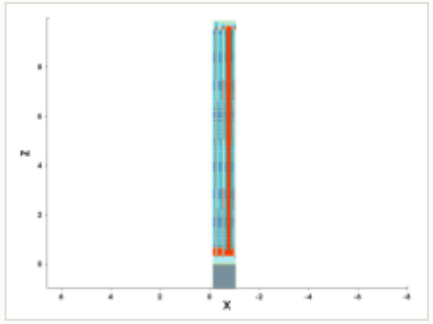

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

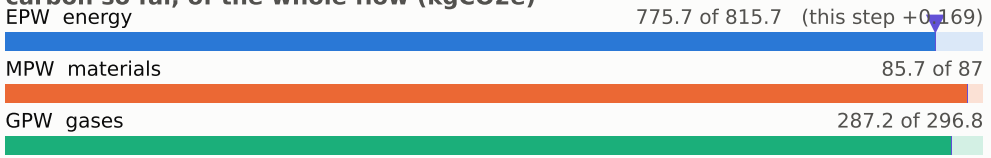

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

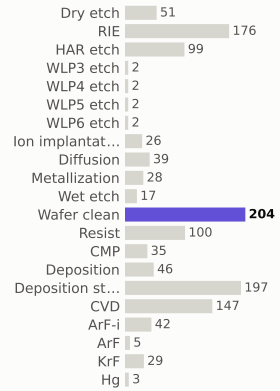

materials deposited (g)



gases emitted (g)



Step #21300: CVD

depo_isotropic · CVD

1.31	1,149.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

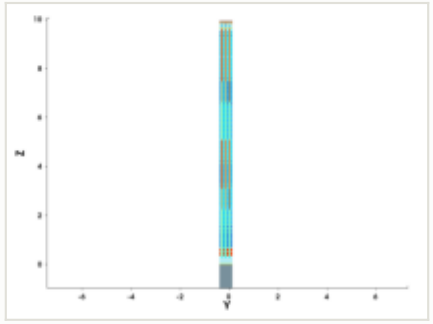

y cut at -0.150 µm

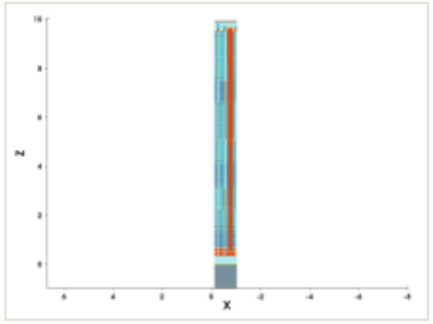

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.075 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

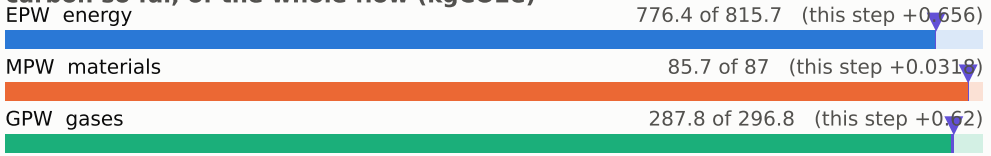

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

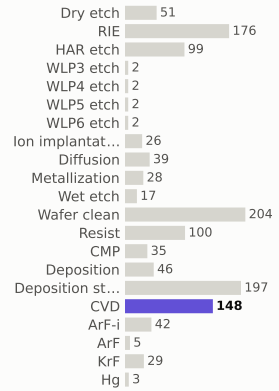

materials deposited (g)



gases emitted (g)

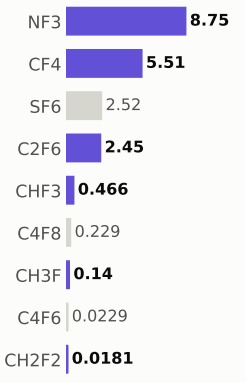

Step #21310: CVD

depo_isotropic · CVD

1.31	1,151.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

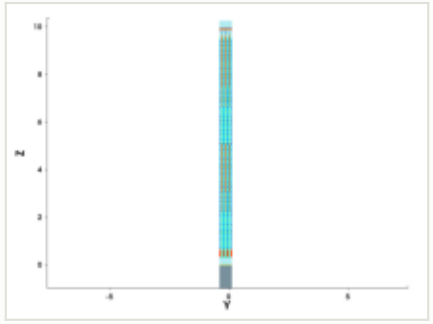

y cut at -0.150 µm

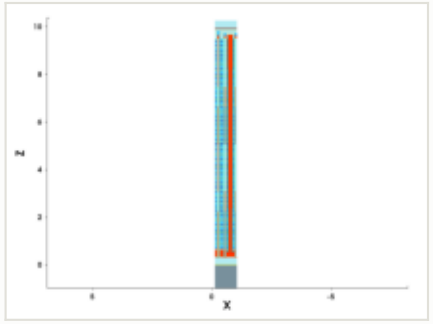

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

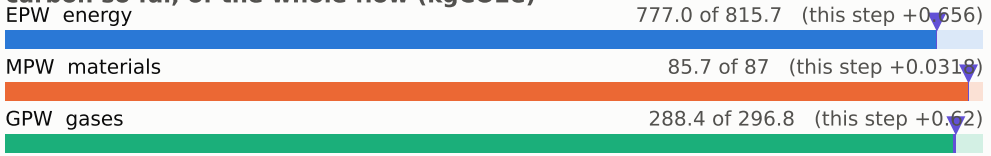

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

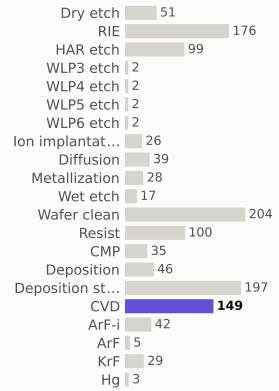

materials deposited (g)



gases emitted (g)

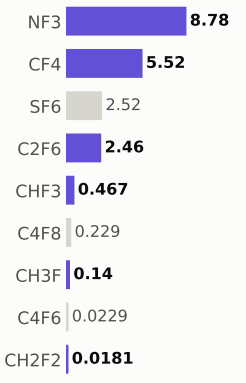

Step #21320: ArF

litho_patterning · ArF

0.199	1,151.4	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

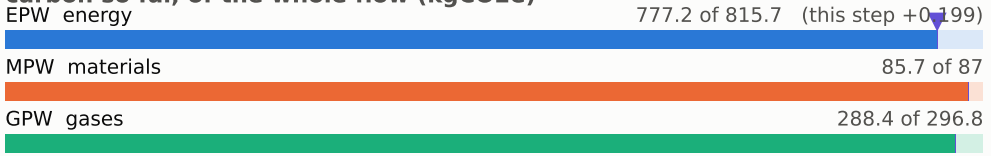

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

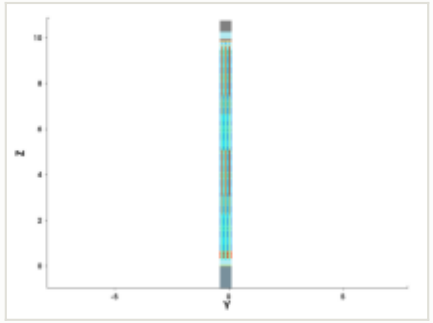

y cut at -0.150 µm

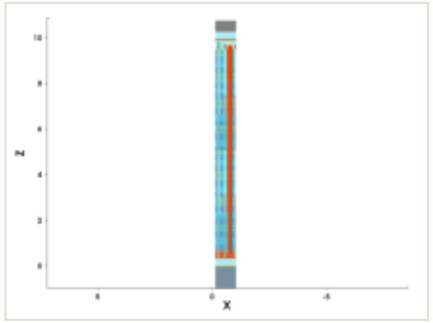

mask: layer 52:0, negative (GDSII)



steps by process area

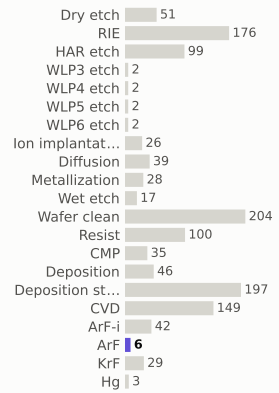

materials deposited (g)



gases emitted (g)

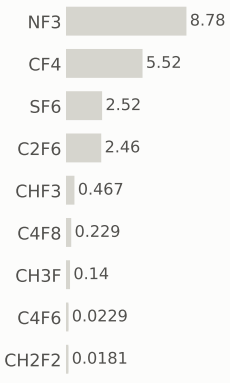

Step #21330: RIE

etch_anisotropic · RIE

1.04	1,152.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

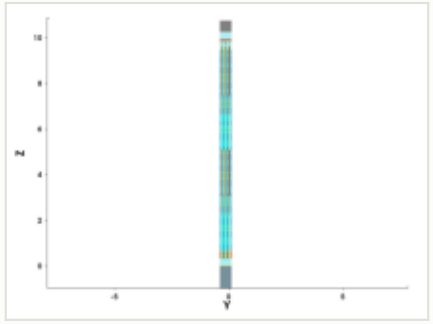

y cut at -0.150 µm

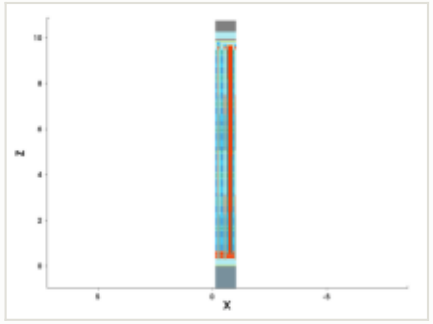

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

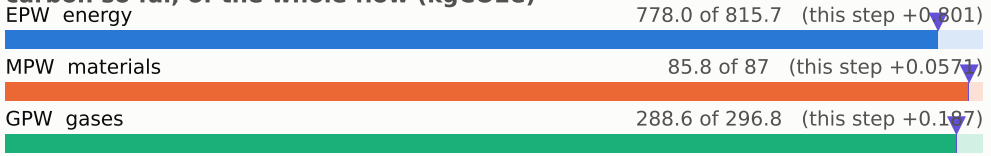

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

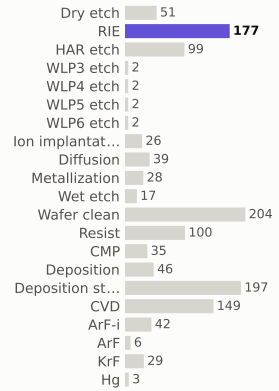

materials deposited (g)

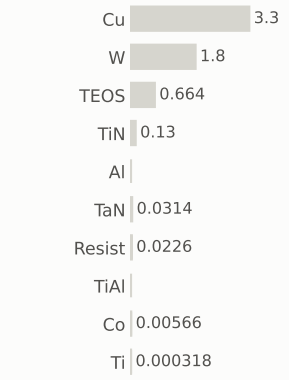

gases emitted (g)

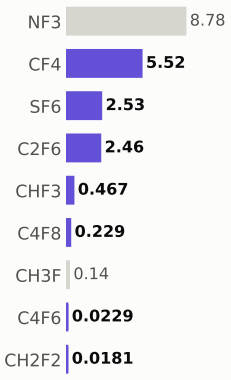

Step #21340: RIE

etch_anisotropic · RIE

1.04	1,153.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

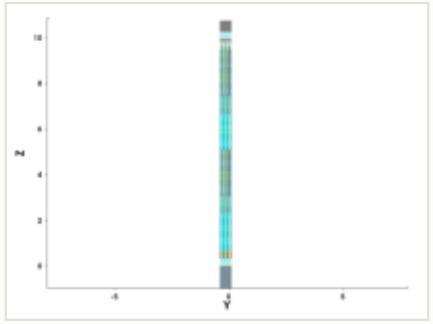

y cut at -0.150 µm

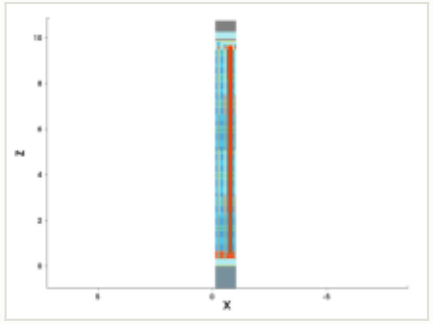

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

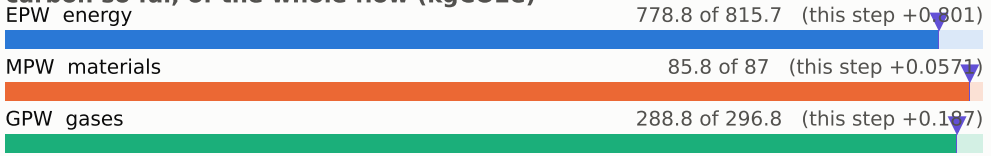

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

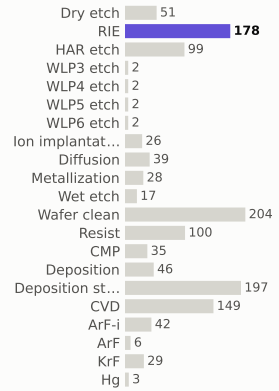

materials deposited (g)

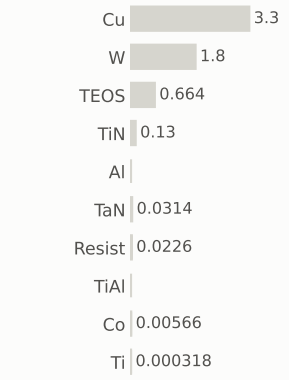

gases emitted (g)

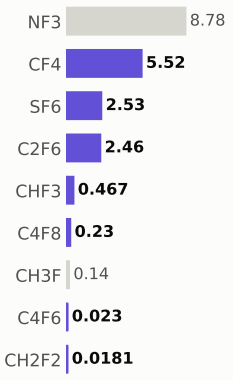

Step #21350: Dry_etch

etch_strip · Dry_etch

0.801	1,154.3	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

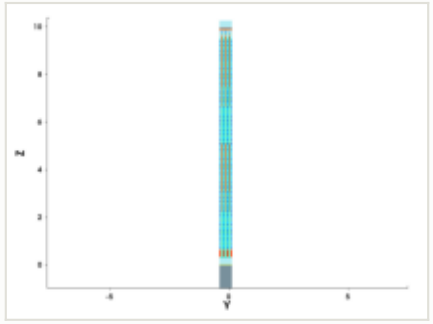

y cut at -0.150 µm

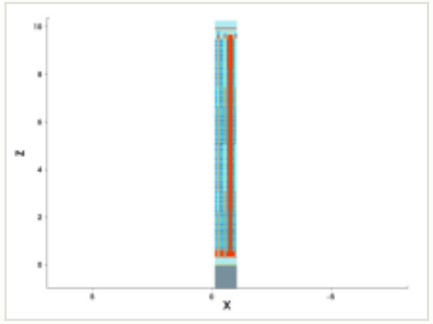

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

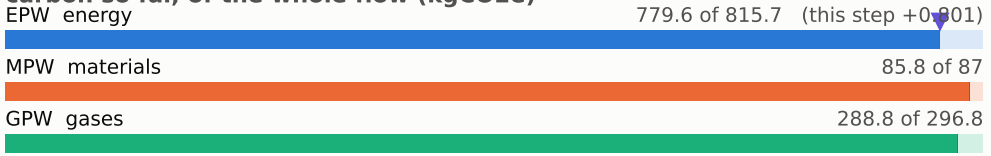

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

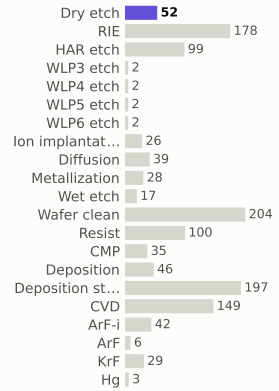

materials deposited (g)



gases emitted (g)

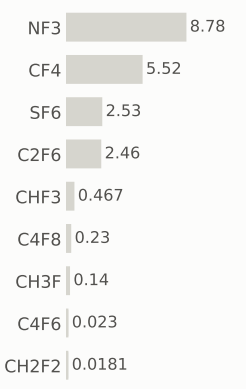

Step #21360: Wafer_clean

clean · Wafer_clean

0.169	1,154.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

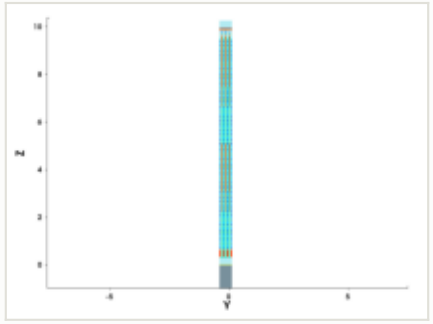

y cut at -0.150 µm

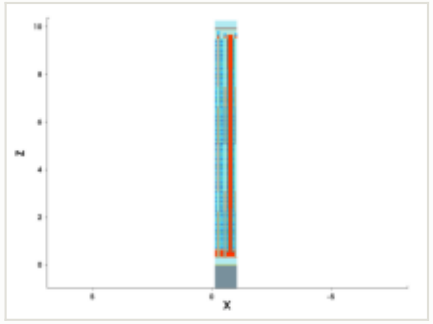

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

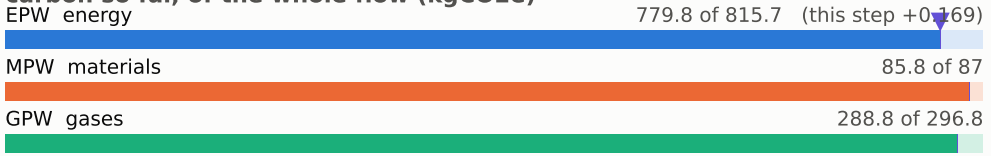

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

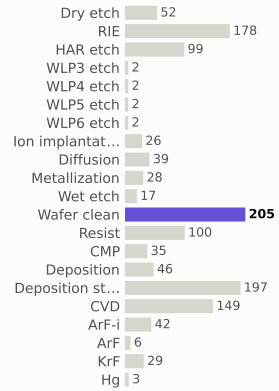

materials deposited (g)



gases emitted (g)

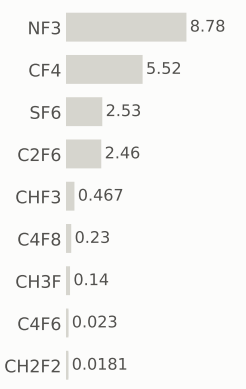

Step #21370: Deposition

depo_isotropic · Deposition

0.656	1,155.1	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

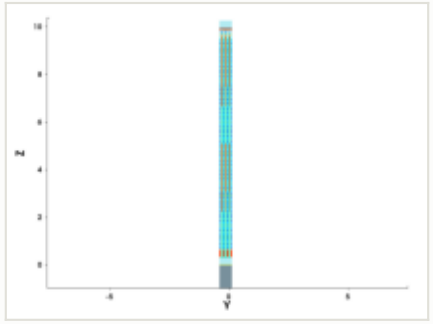

y cut at -0.150 µm

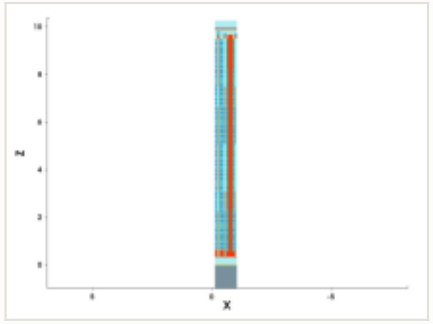

mask for this step

no mask for this step

this step

process area	Deposition
material	TaN
thickness	0.003 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	7.50e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

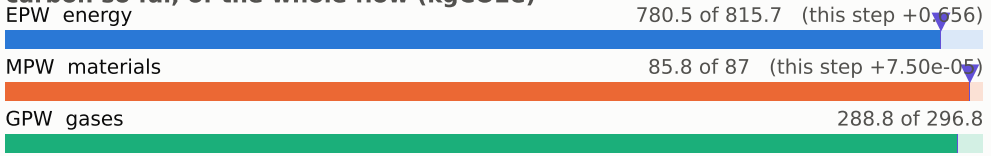

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

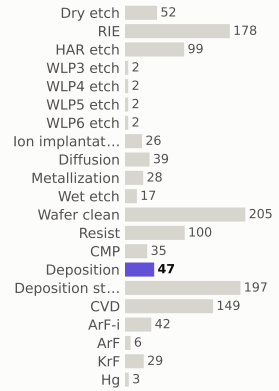

materials deposited (g)



gases emitted (g)



Step #21380: Metallization

depo_isotropic · Metallization

1.2	1,156.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

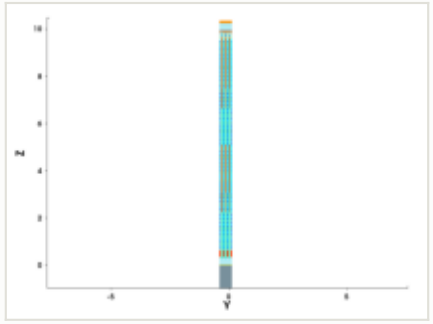

y cut at -0.150 µm

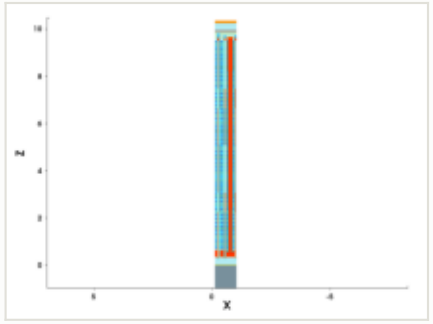

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.1 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.000386 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

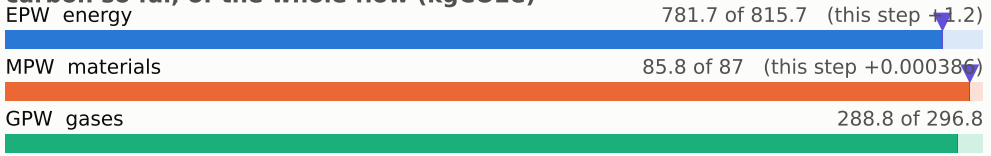

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

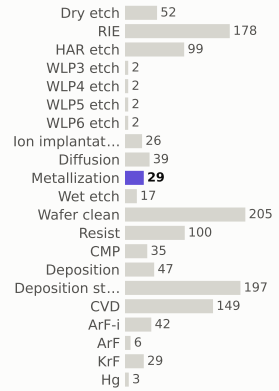

materials deposited (g)



gases emitted (g)

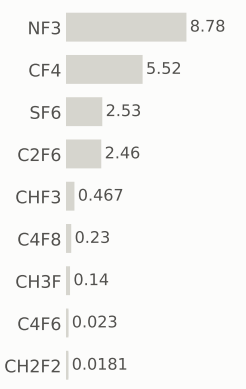

Step #21390: CMP

etch_cmp · CMP

0.169	1,156.5	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

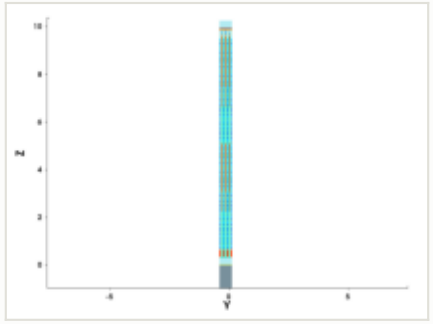

y cut at -0.150 µm

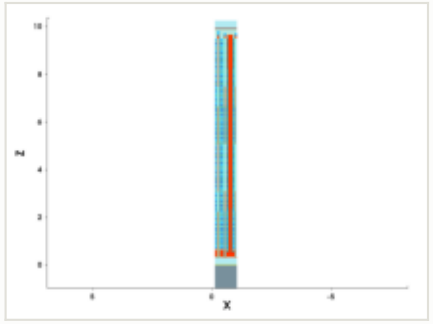

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

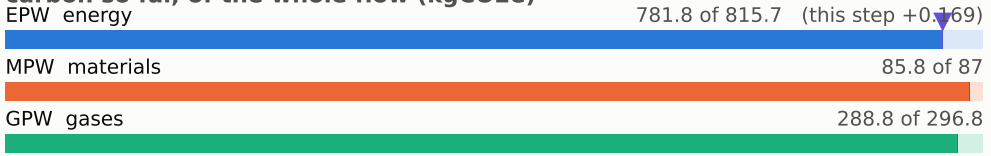

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

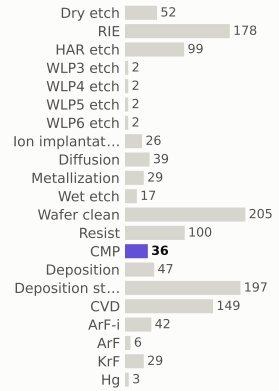

materials deposited (g)

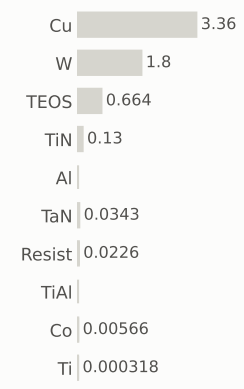

gases emitted (g)

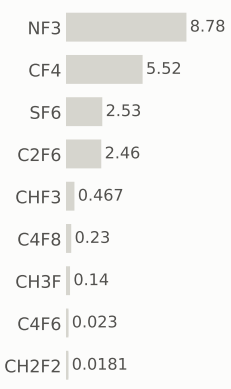

Step #21400: Wafer_clean

clean · Wafer_clean

0.169	1,156.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

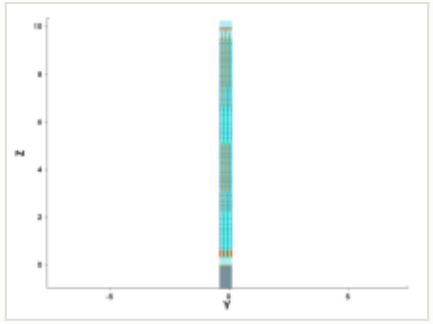

y cut at -0.150 µm

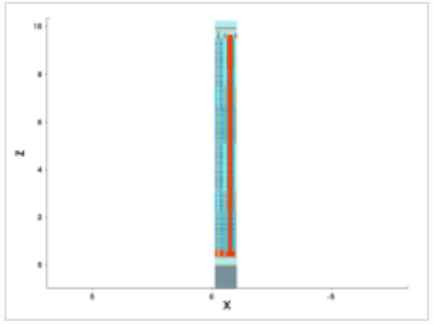

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

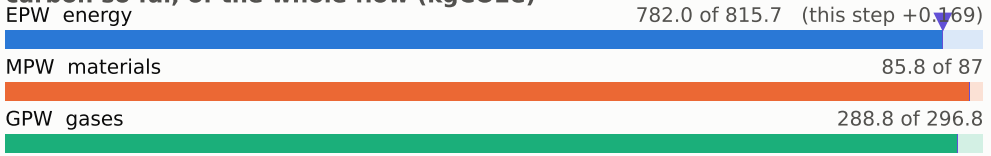

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

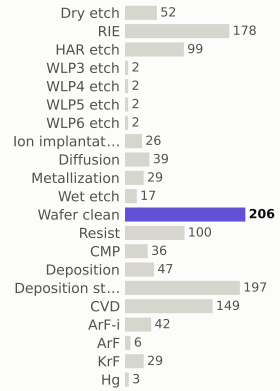

materials deposited (g)

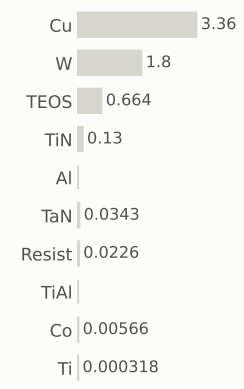

gases emitted (g)

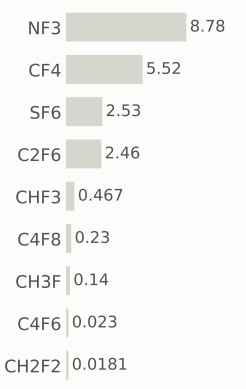

Step #21410: CVD

depo_isotropic · CVD

1.31	1,158.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

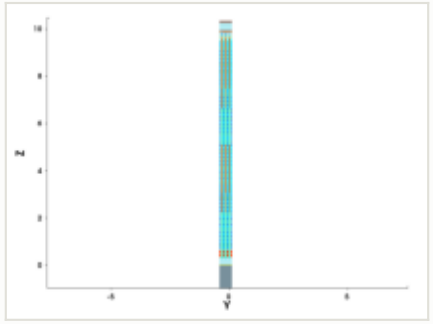

y cut at -0.150 µm

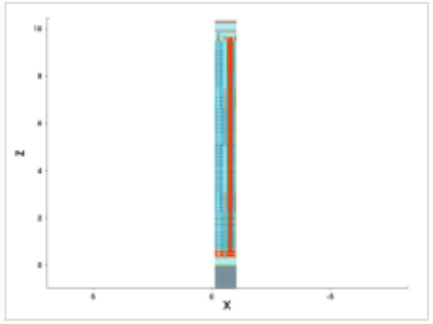

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

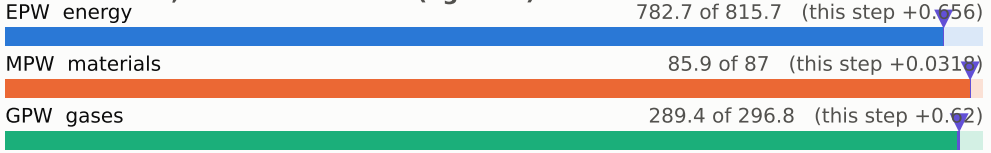

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

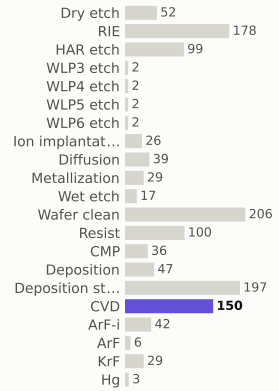

materials deposited (g)

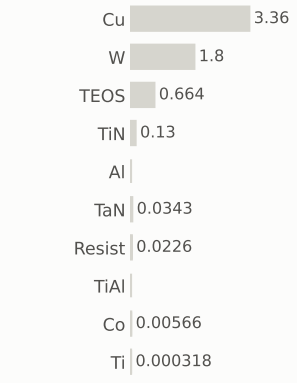

gases emitted (g)

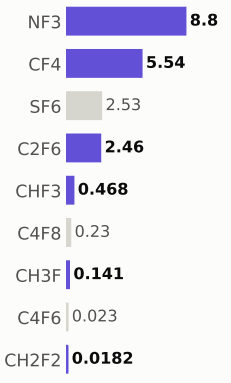

Step #21420: KrF

litho_patterning · KrF

0.199	1,158.2	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

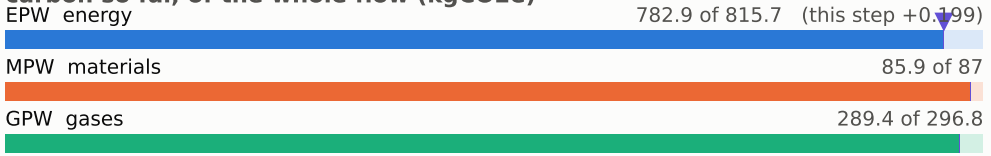

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

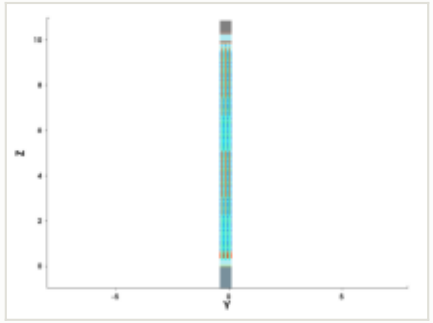

y cut at -0.150 µm

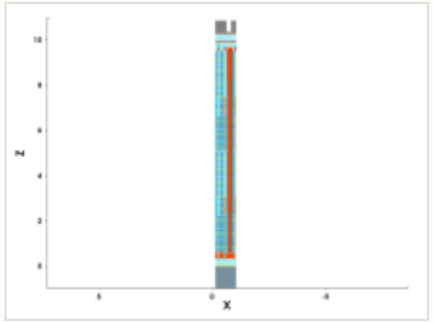

mask: layer 53:0, negative (GDSII)

steps by process area

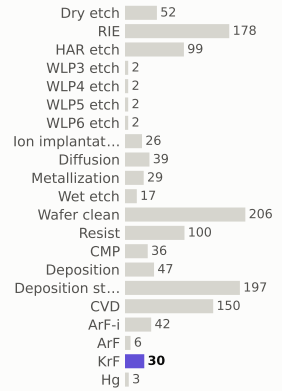

materials deposited (g)



gases emitted (g)

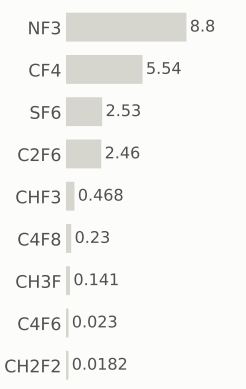

Step #21430: RIE

etch_anisotropic · RIE

1.04	1,159.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

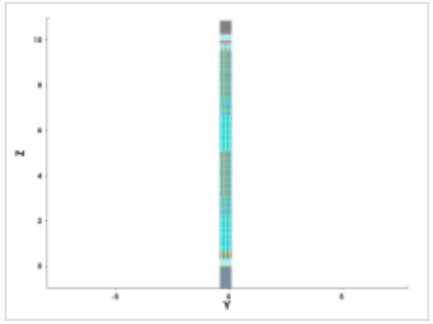

y cut at -0.150 µm

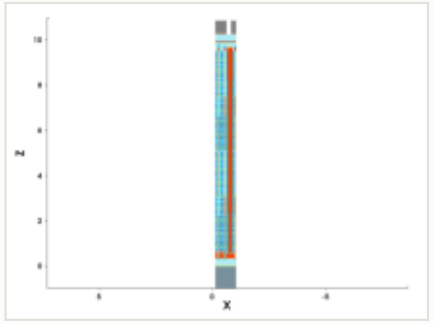

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

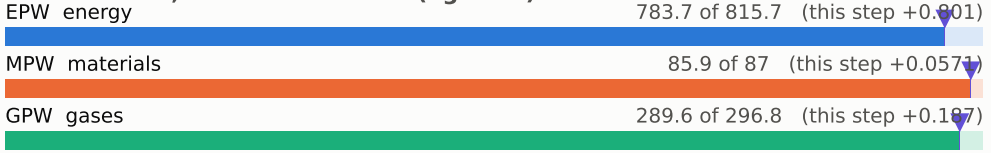

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

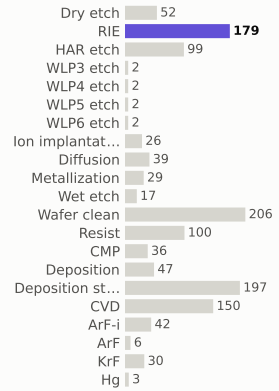

materials deposited (g)

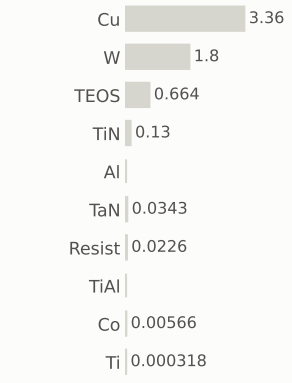

gases emitted (g)

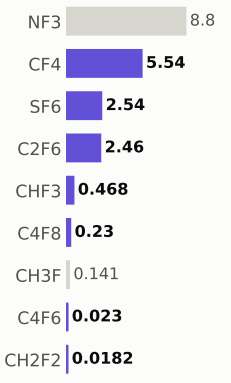

Step #21440: Dry_etch

etch_strip · Dry_etch

0.801	1,160.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

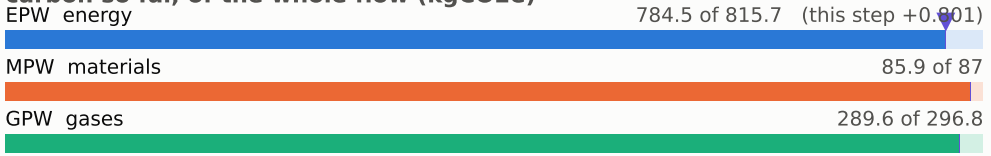

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

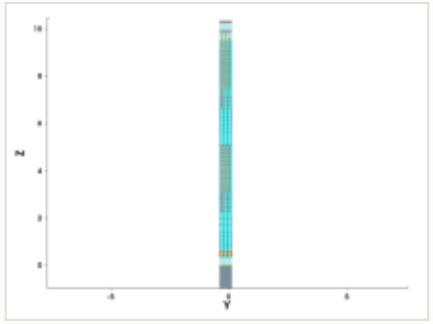

y cut at -0.150 µm

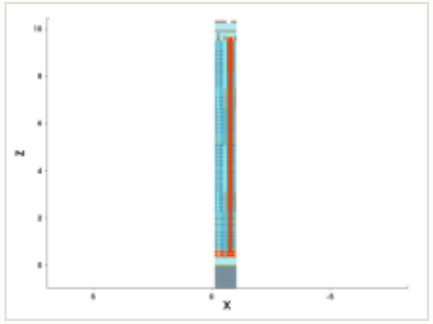

mask for this step

no mask for this step

steps by process area

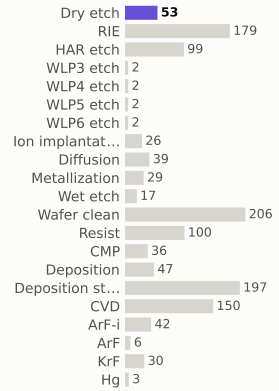

materials deposited (g)

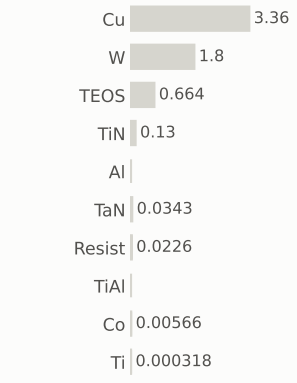

gases emitted (g)



Step #21450: Wafer_clean

clean · Wafer_clean

0.169	1,160.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

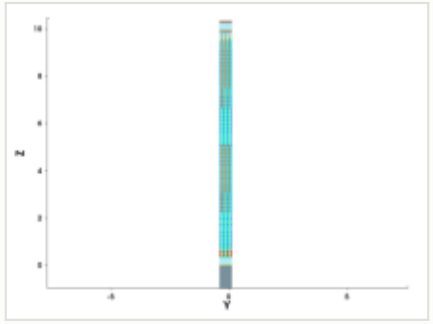

y cut at -0.150 µm

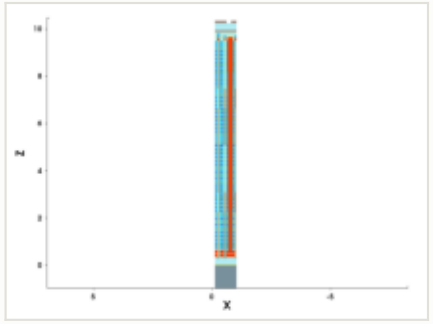

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

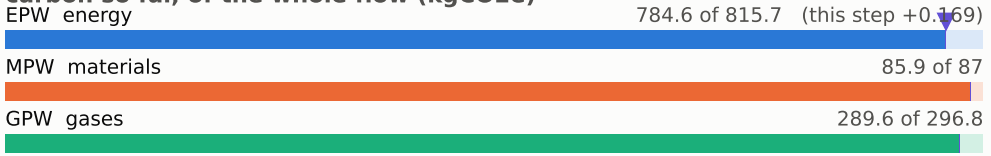

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

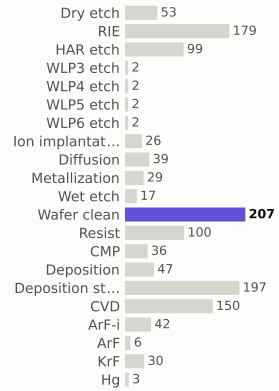

materials deposited (g)

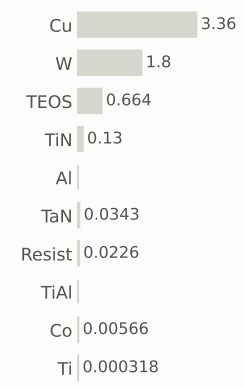

gases emitted (g)

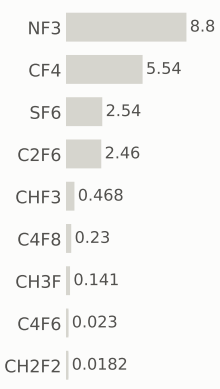

Step #21460: Deposition

depo_isotropic · Deposition

0.656	1,160.8	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Deposition
material	TaN
thickness	0.005 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000125 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

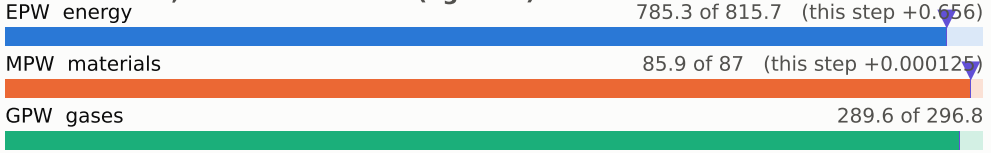

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

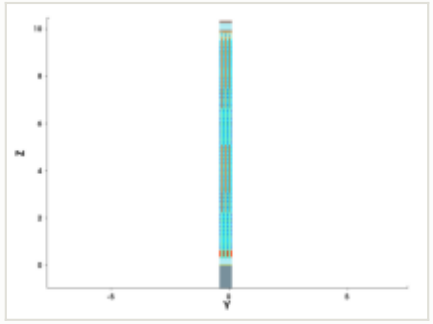

y cut at -0.150 µm

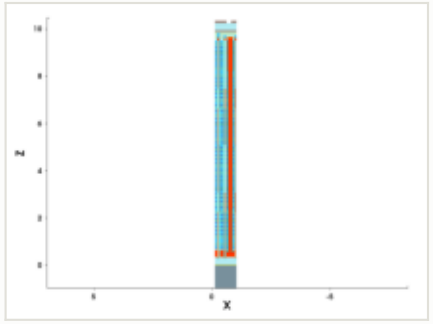

mask for this step

no mask for this step

steps by process area

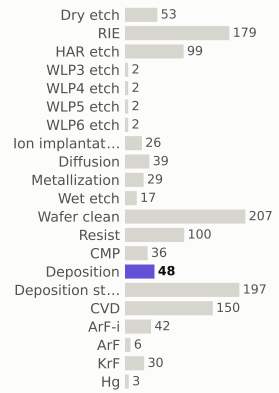

materials deposited (g)

gases emitted (g)



Step #21470: Metallization

depo_isotropic · Metallization

1.2	1,162.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

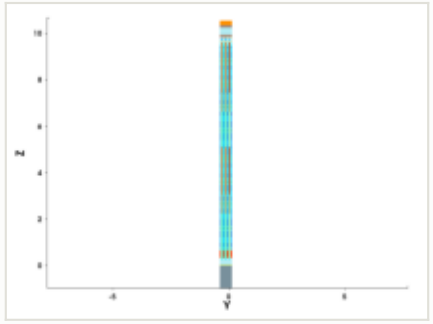

y cut at -0.150 µm

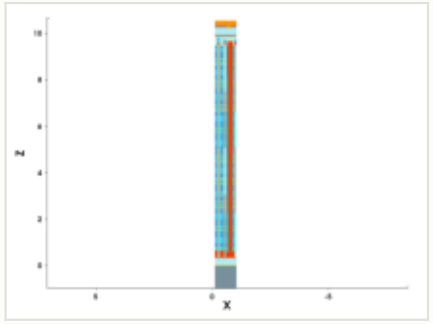

mask for this step

no mask for this step

this step

process area	Metallization
material	Cu
thickness	0.2 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.000771 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

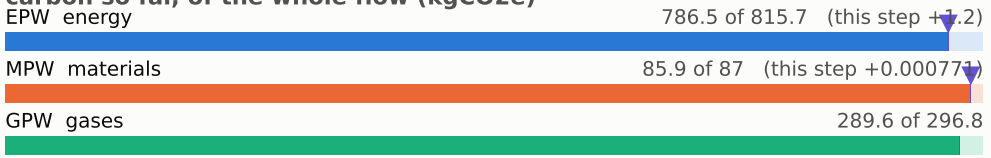

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

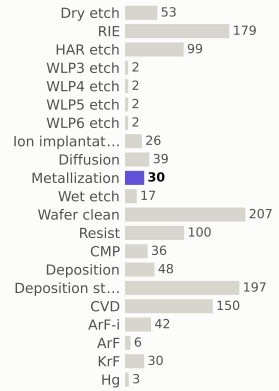

materials deposited (g)

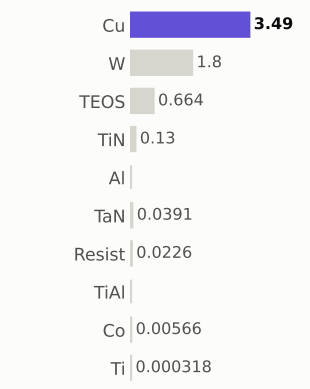

gases emitted (g)

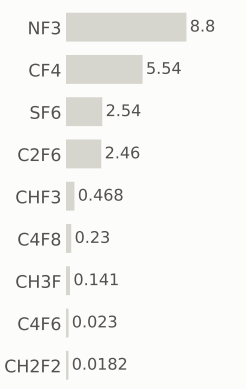

Step #21480: CMP

etch_cmp · CMP

0.169	1,162.2	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

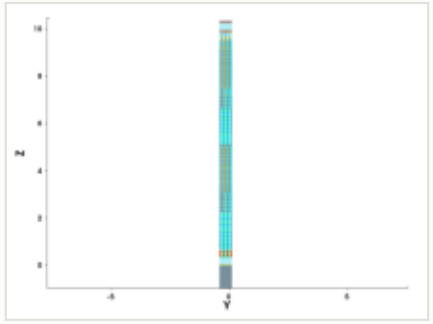

y cut at -0.150 µm

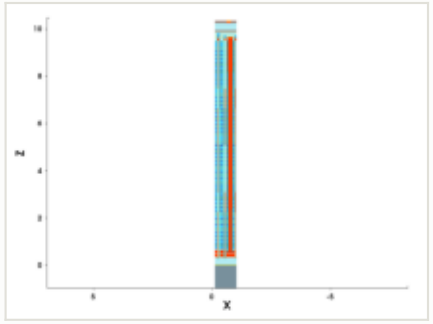

mask for this step

no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

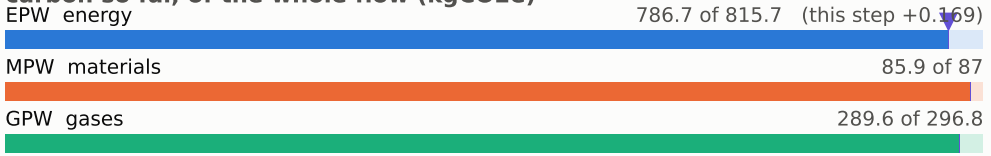

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

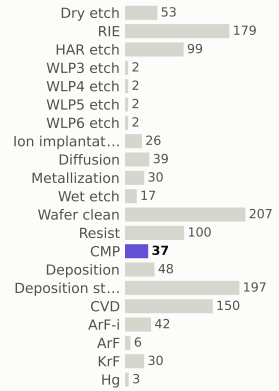

materials deposited (g)



gases emitted (g)

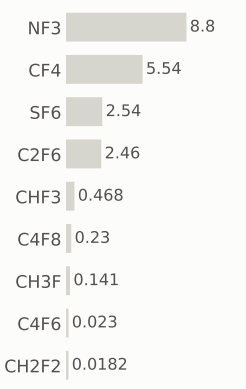

Step #21490: Wafer_clean

clean · Wafer_clean

0.169	1,162.4	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

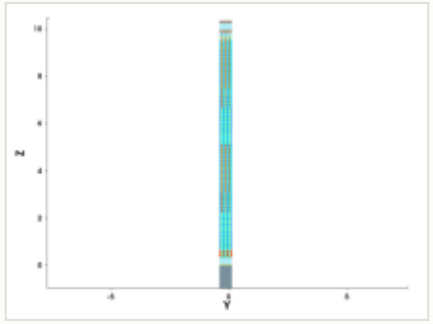

y cut at -0.150 µm

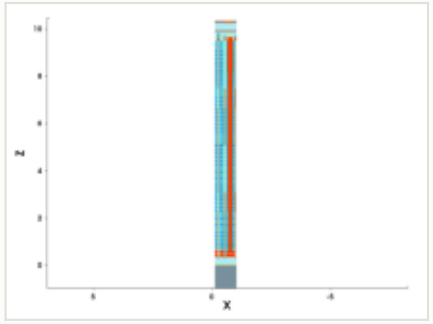

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

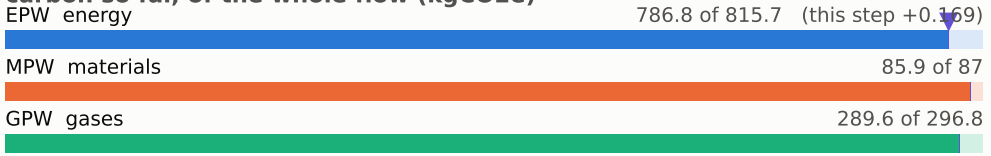

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

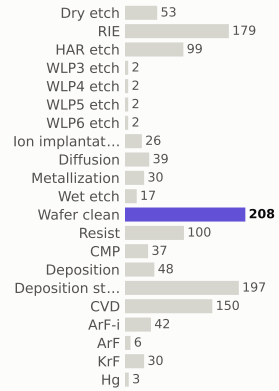

materials deposited (g)

gases emitted (g)



Step #21510: Diffusion

treatment · Diffusion

0.801	1,163.2	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

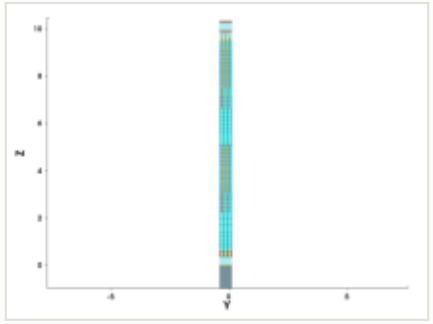

y cut at -0.150 µm

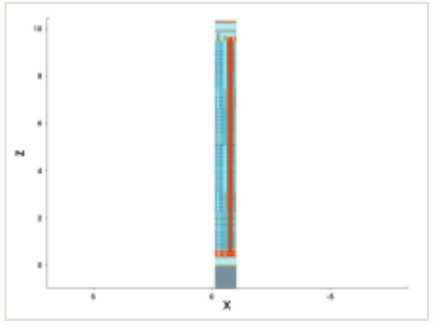

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

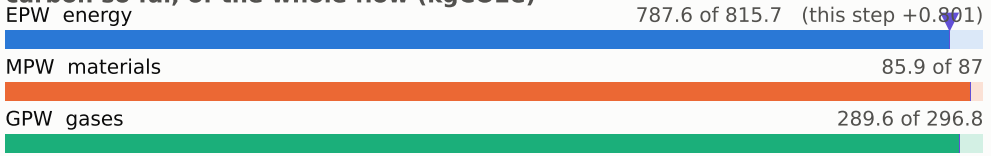

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

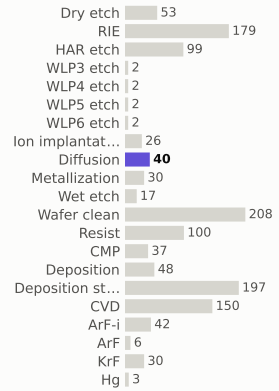

materials deposited (g)

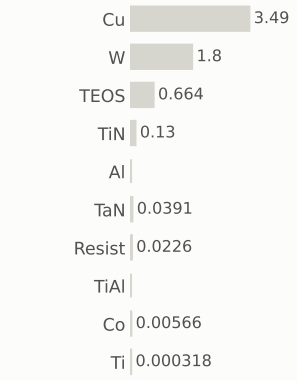

gases emitted (g)



Step #21520: Diffusion

treatment · Diffusion

0.801	1,164.0	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

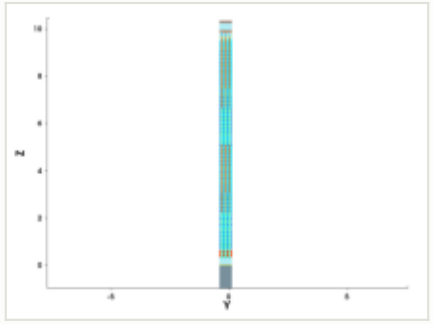

y cut at -0.150 µm

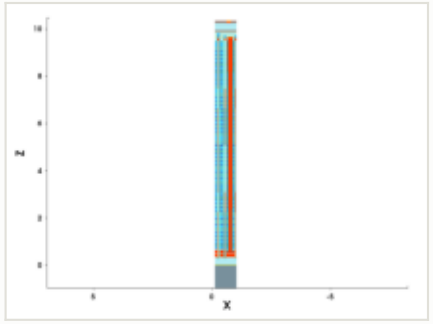

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

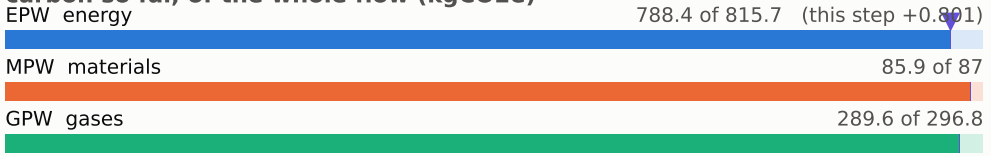

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

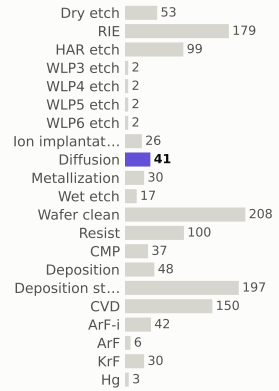

materials deposited (g)

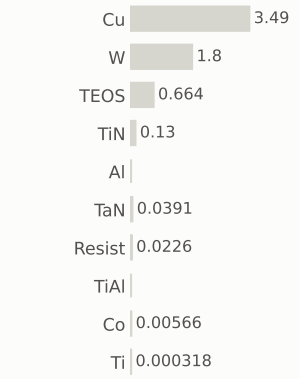

gases emitted (g)

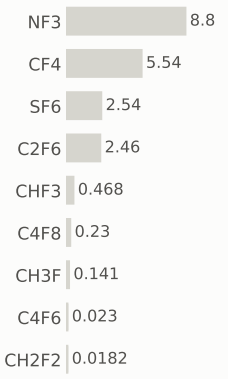

Step #21540: Dry_etch

bond_structure · Dry_etch

0.801	1,164.8	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

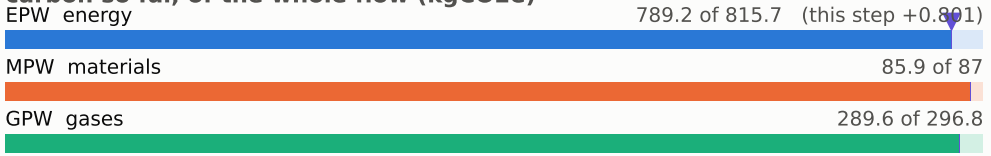

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

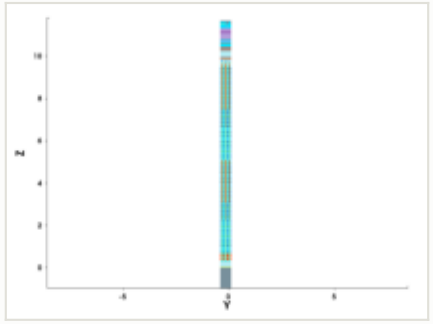

y cut at -0.150 µm

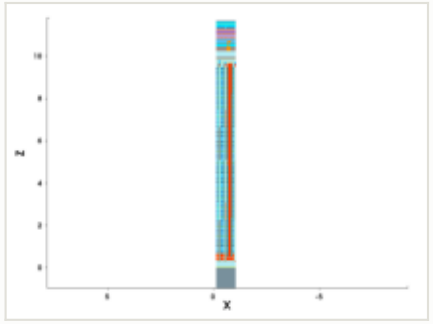

mask for this step

no mask for this step

steps by process area

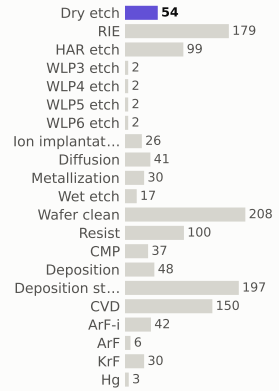

materials deposited (g)

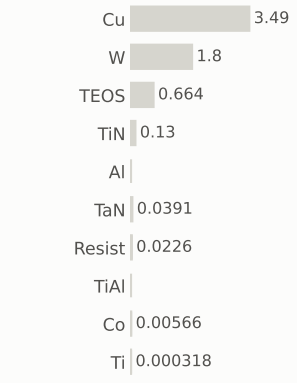

gases emitted (g)

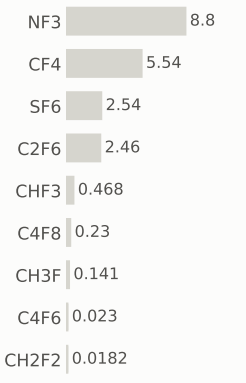

Step #21545: Diffusion

anneal · Diffusion

0.801	1,165.6	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

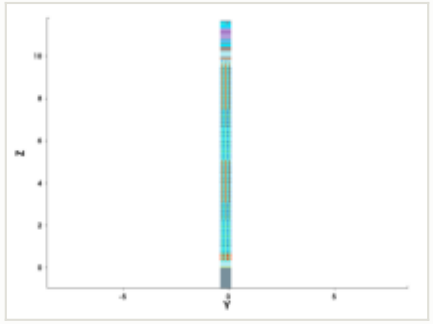

y cut at -0.150 µm

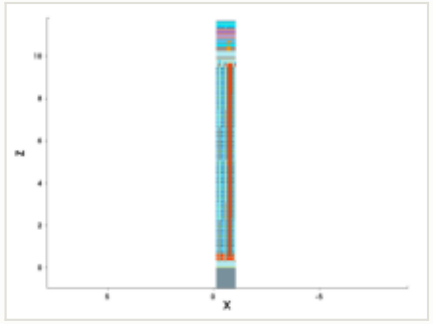

mask for this step

no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp

carbon so far, of the whole flow (kgCO2e)

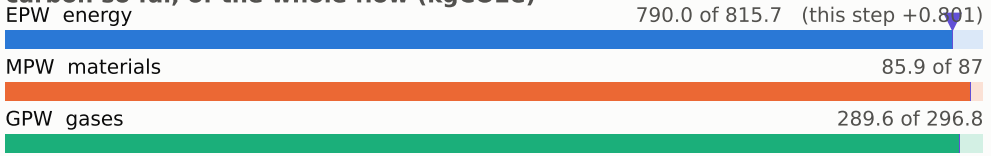

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

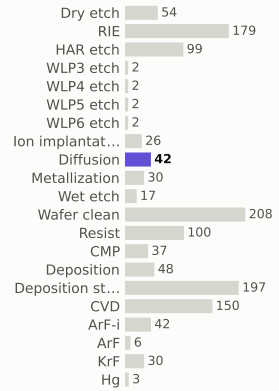

materials deposited (g)

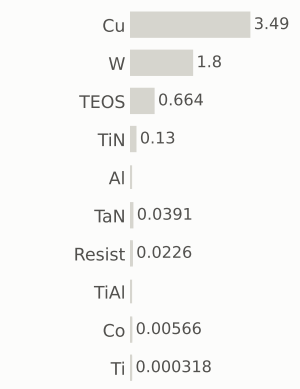

gases emitted (g)

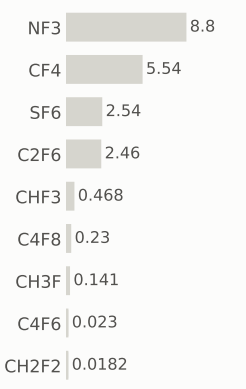

Step #21560: flip_structure

flip_structure · Wafer

0	1,165.6	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

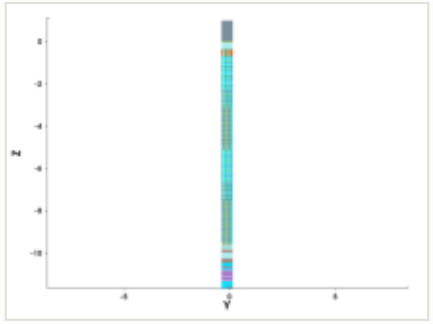

y cut at -0.150 µm

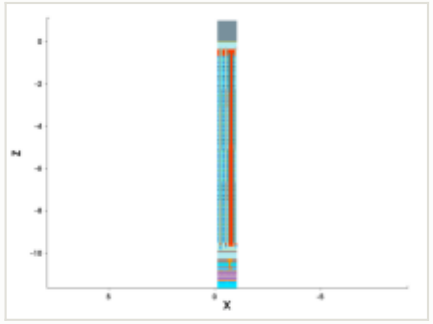

mask for this step

no mask for this step

this step

process area	Wafer	EPW	0 kgCO2e
material	—	EPW tool	0 kgCO2e
thickness	—	EPW overhead	0 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0 kWh + 0 overhead	embodied carbon	**0 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)

carbon so far, of the whole flow (kgCO2e)

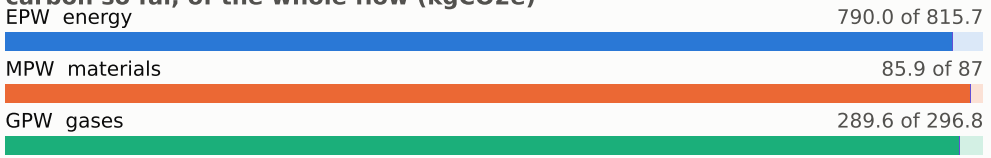

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

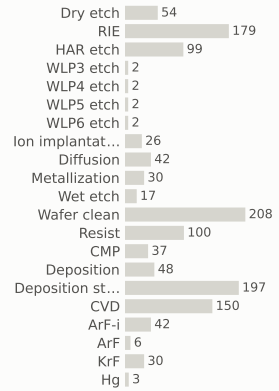

materials deposited (g)

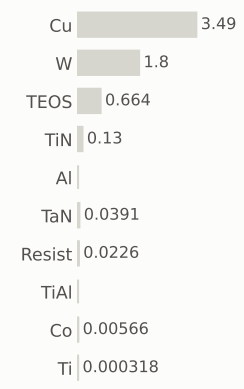

gases emitted (g)

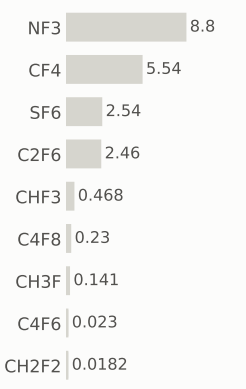

Step #21590: CMP

etch_cmp · CMP

0.169	1,165.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

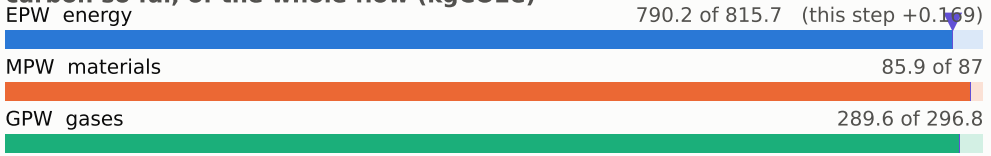

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

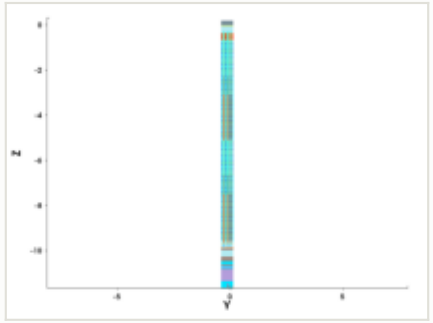

y cut at -0.150 µm

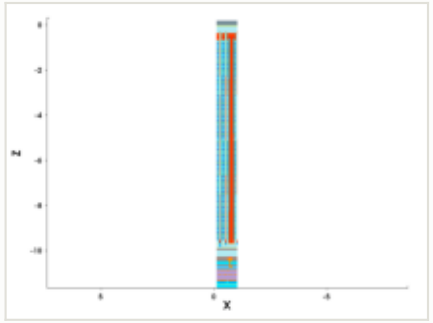

mask for this step

no mask for this step

steps by process area

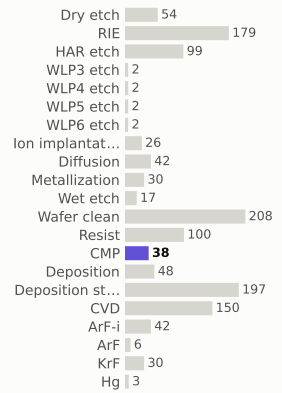

materials deposited (g)



gases emitted (g)

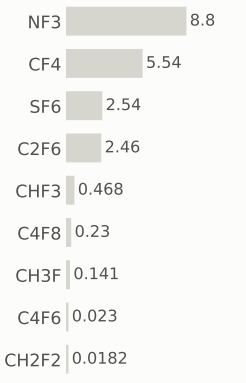

Step #21610: Wafer_clean

clean · Wafer_clean

0.169	1,165.9	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

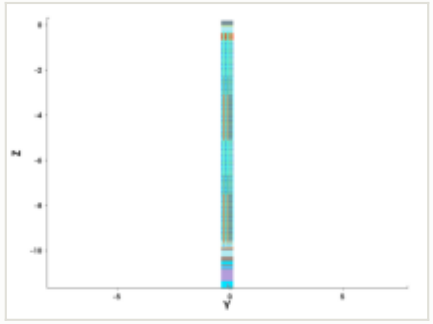

y cut at -0.150 µm

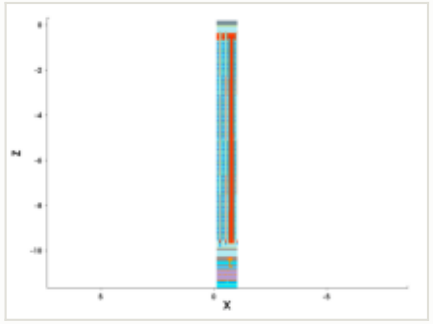

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

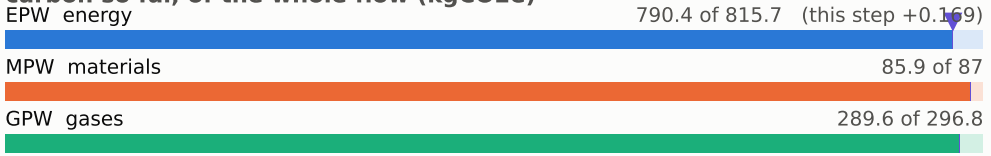

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

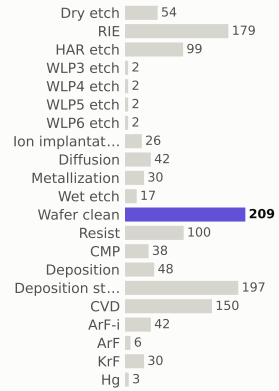

materials deposited (g)

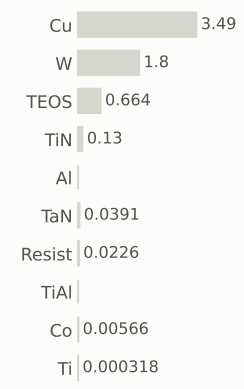

gases emitted (g)

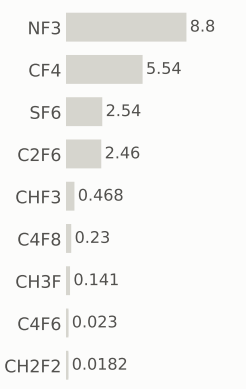

Step #21620: KrF

litho_patterning · KrF

0.199	1,166.1	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

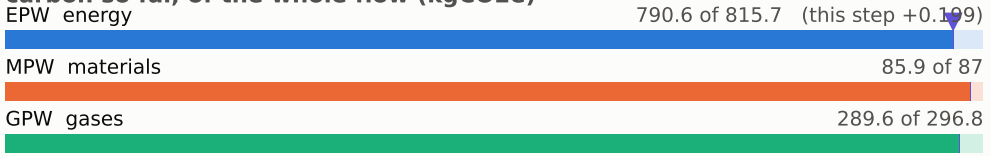

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

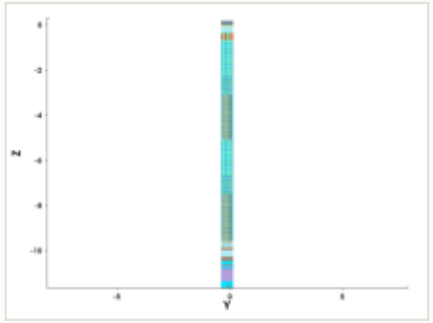

y cut at -0.150 µm

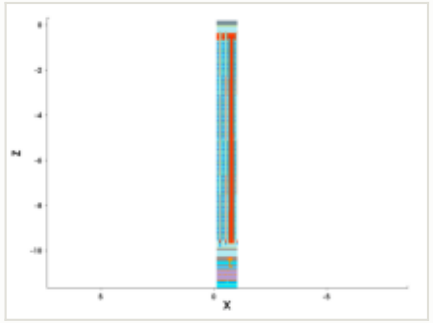

mask: layer 25:0, 26:0, negative (GDSII)

steps by process area

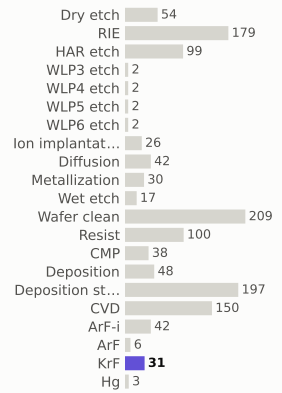

materials deposited (g)

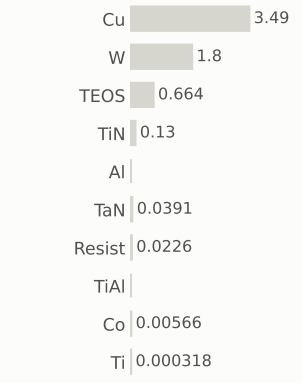

gases emitted (g)

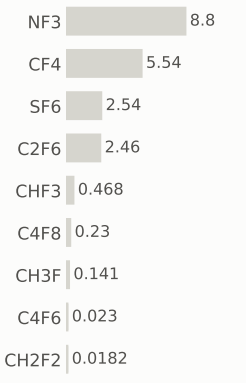

Step #21640: RIE

etch_anisotropic · RIE

1.04	1,167.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



x cut at -0.570 µm

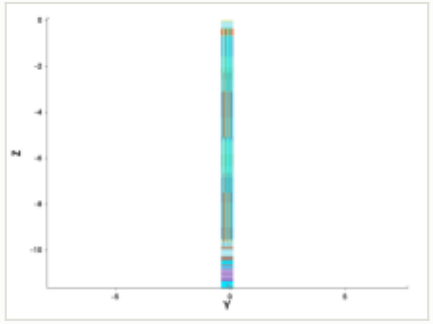

y cut at -0.150 µm

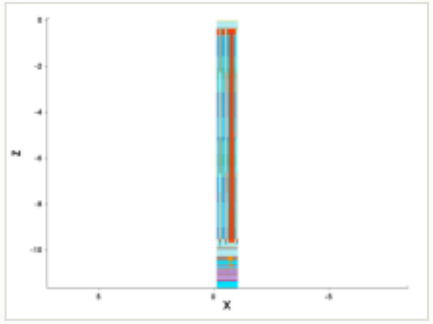

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

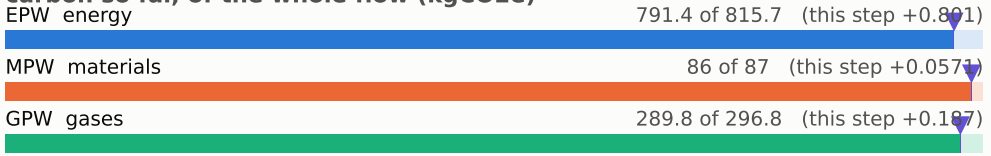

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

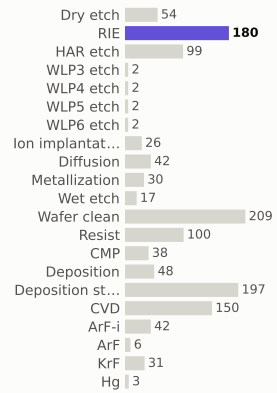

materials deposited (g)

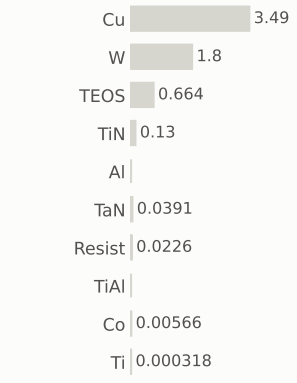

gases emitted (g)

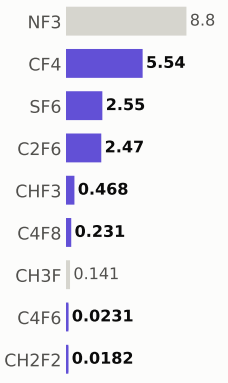

Step #21660: RIE

etch_anisotropic · RIE

1.04	1,168.2	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

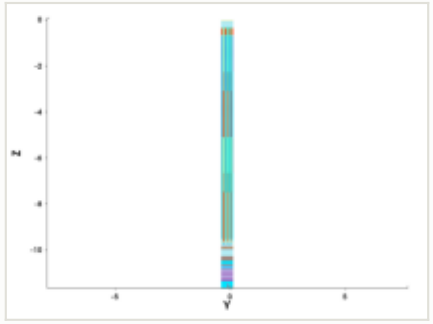

y cut at -0.150 µm

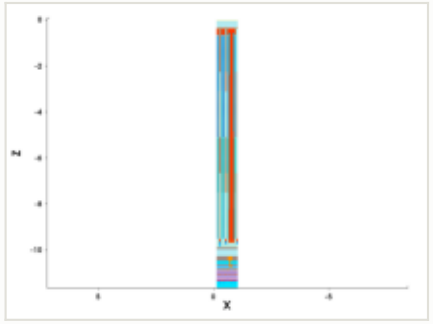

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

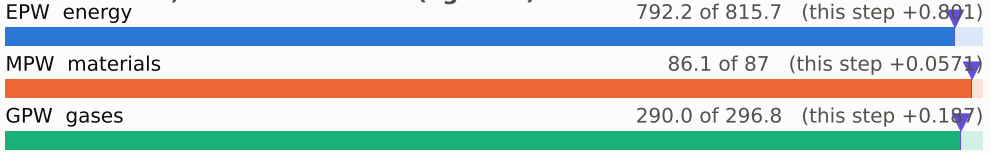

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

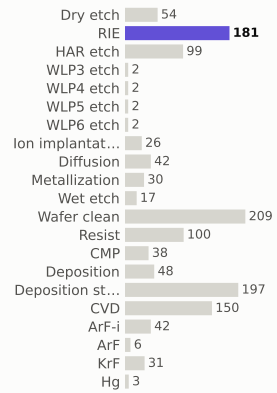

materials deposited (g)

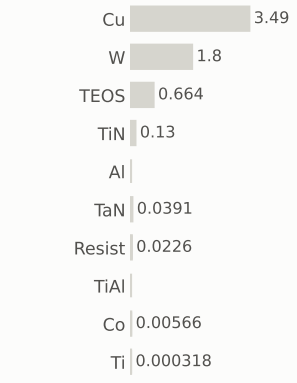

gases emitted (g)

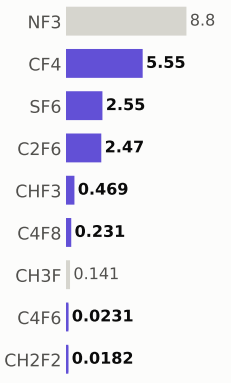

Step #21680: RIE

etch_anisotropic · RIE

1.04	1,169.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

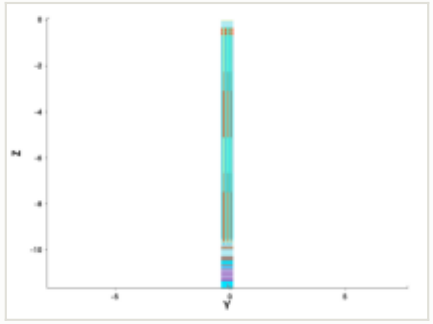

y cut at -0.150 µm

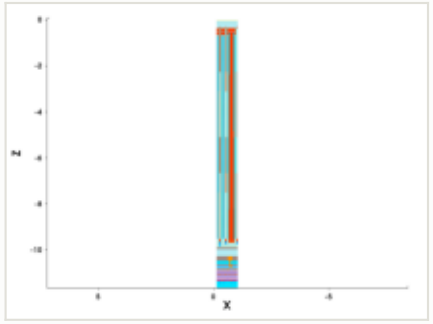

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

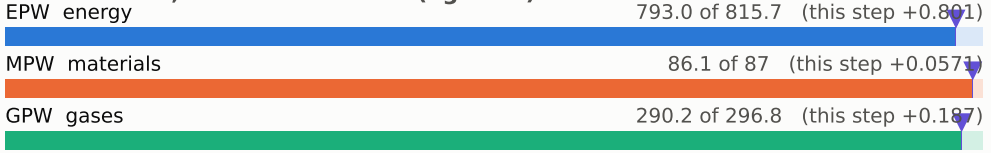

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

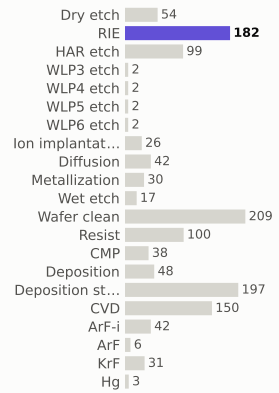

materials deposited (g)

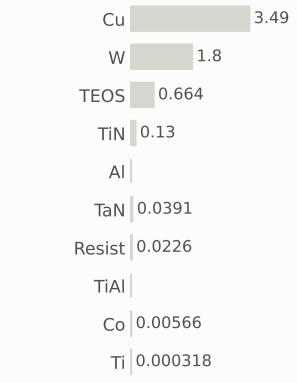

gases emitted (g)

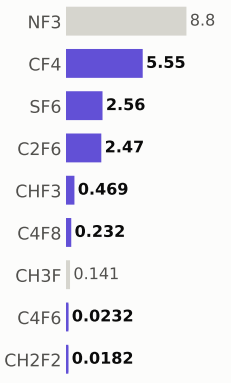

Step #21700: RIE

etch_anisotropic · RIE

1.04	1,170.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

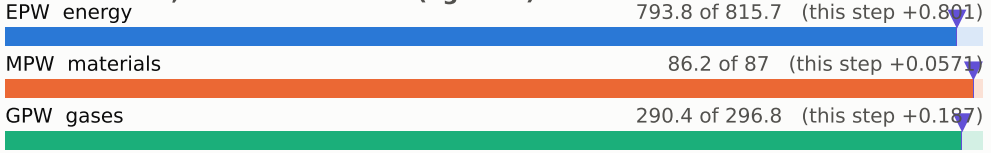

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

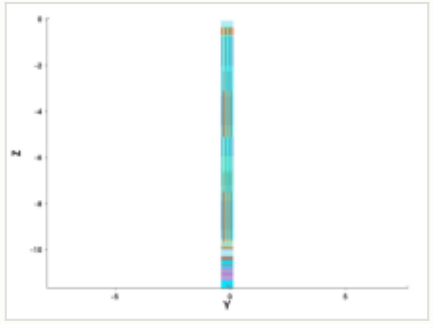

y cut at -0.150 µm

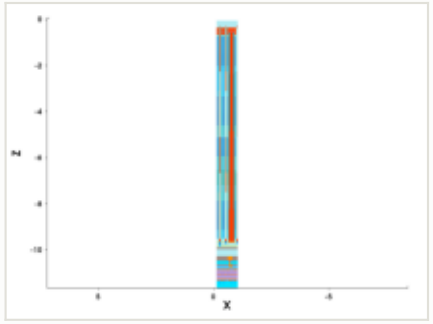

mask for this step

no mask for this step

steps by process area

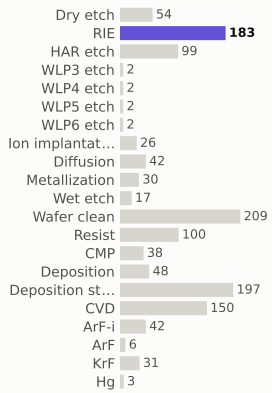

materials deposited (g)

gases emitted (g)

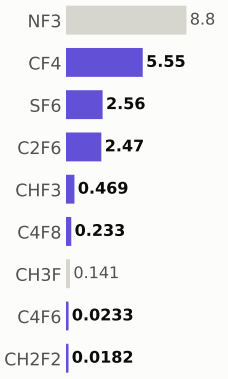

Step #21720: RIE

etch_anisotropic · RIE

1.04	1,171.3	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

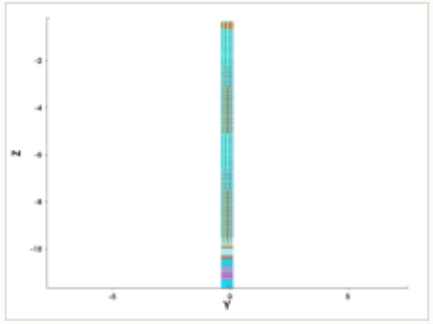

y cut at -0.150 µm

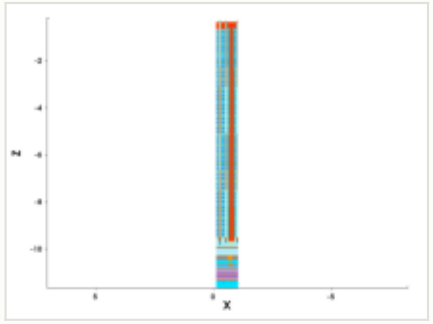

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

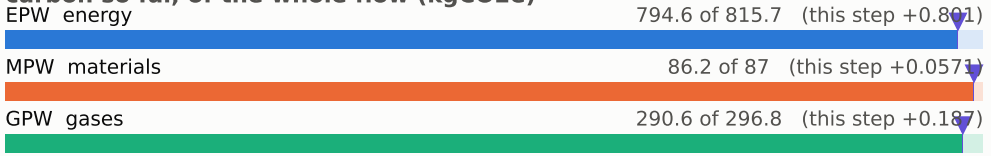

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)

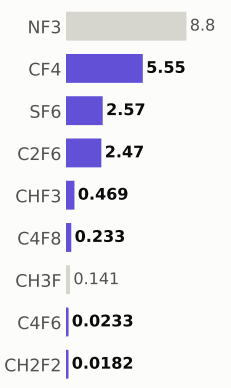

Step #21740: Dry_etch

etch_strip · Dry_etch

0.801	1,172.1	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

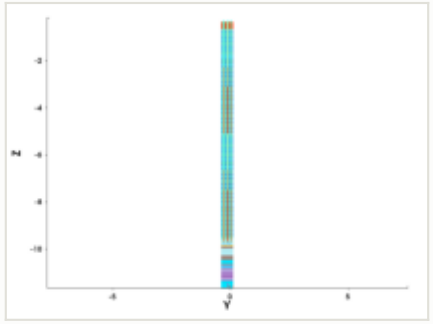

y cut at -0.150 µm

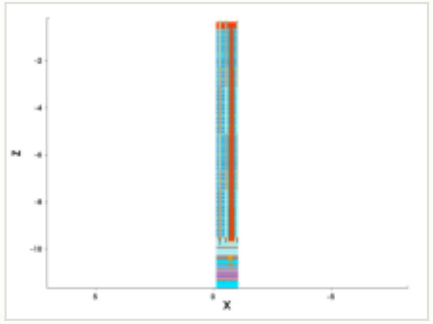

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

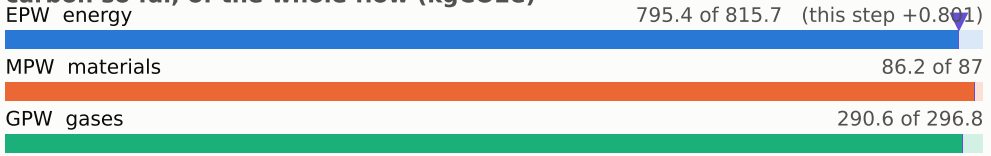

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

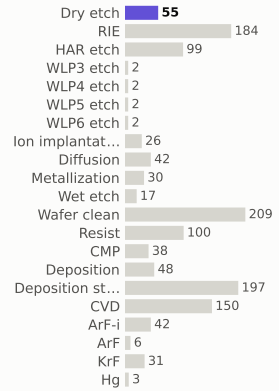

materials deposited (g)



gases emitted (g)

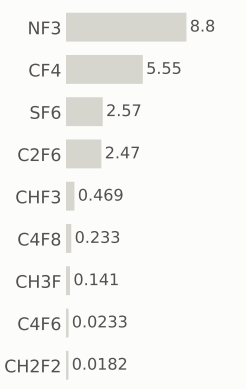

Step #21760: Wafer_clean

clean · Wafer_clean

0.169	1,172.3	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

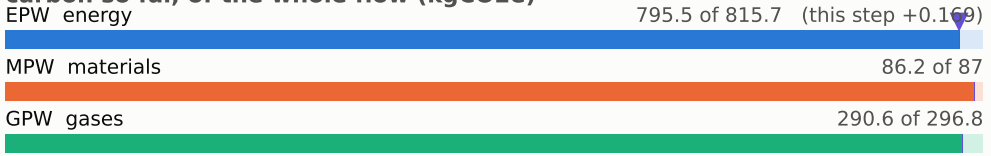

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

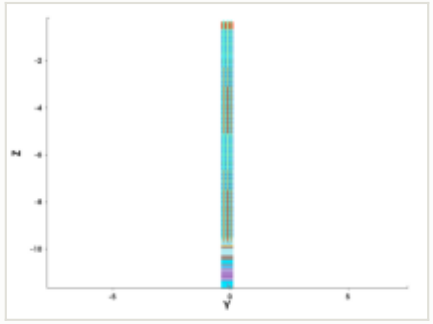

y cut at -0.150 µm

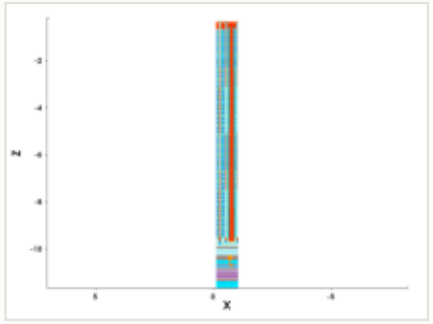

mask for this step

no mask for this step

steps by process area

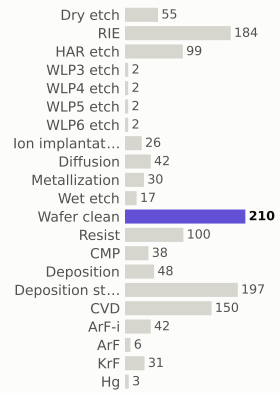

materials deposited (g)

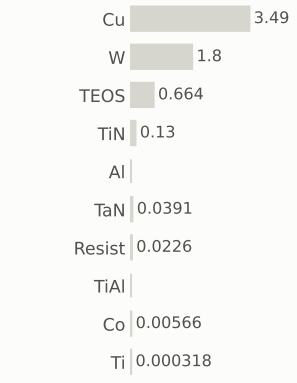

gases emitted (g)

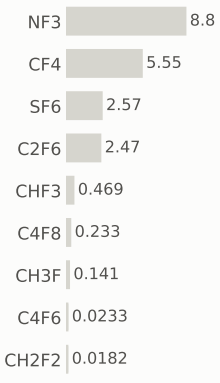

Step #21770: CVD

depo_isotropic · CVD

1.31	1,173.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

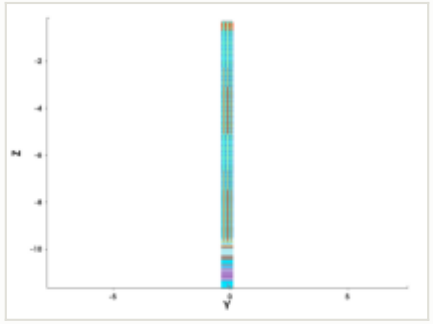

y cut at -0.150 µm

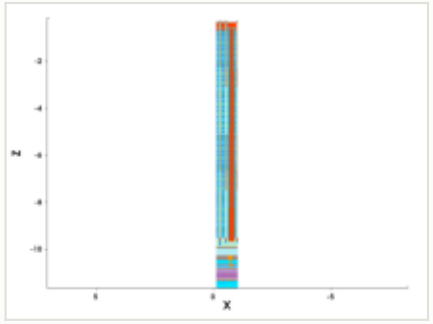

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

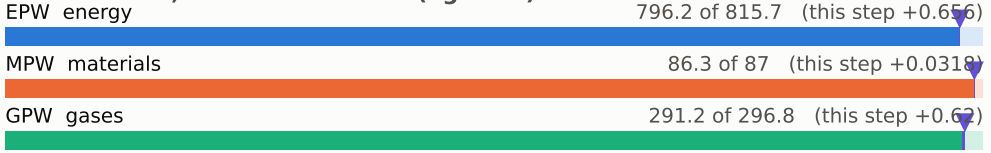

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

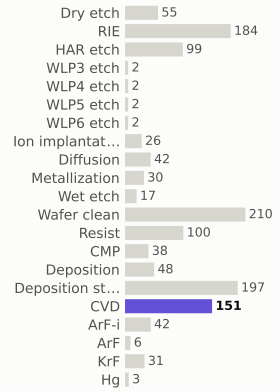

materials deposited (g)

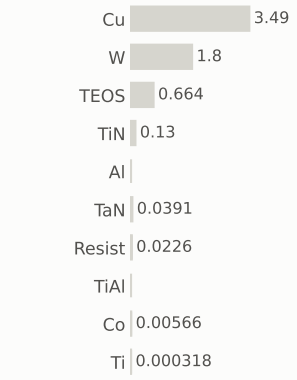

gases emitted (g)

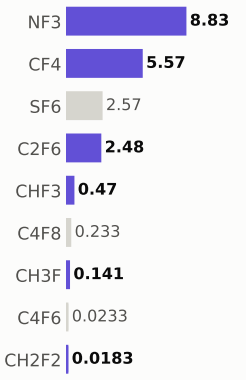

Step #21790: CVD

depo_fill · CVD

1.31	1,174.9	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.5 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

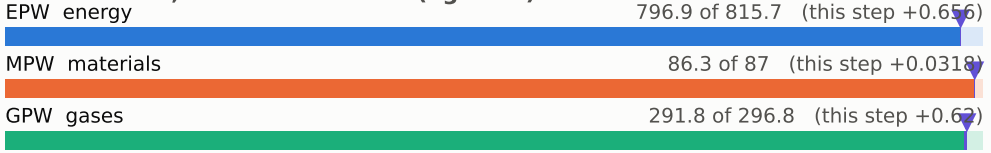

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

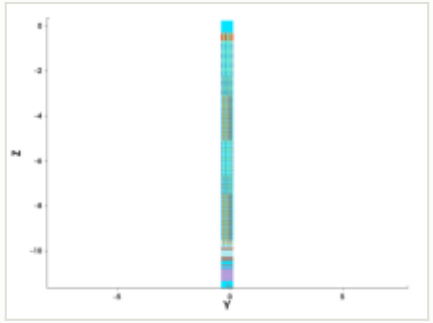

y cut at -0.150 µm

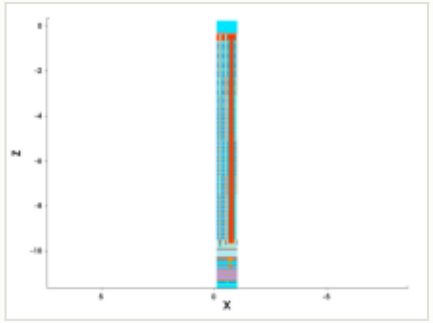

mask for this step

no mask for this step

steps by process area

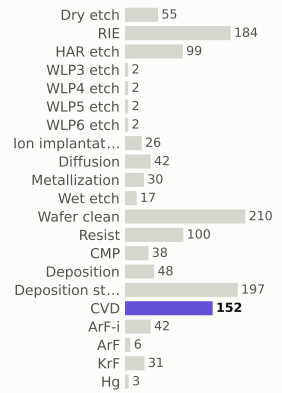

materials deposited (g)

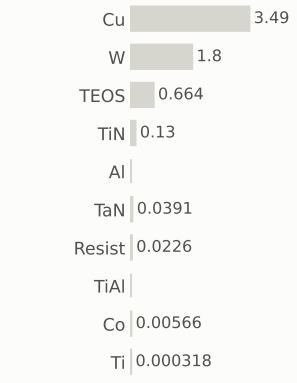

gases emitted (g)

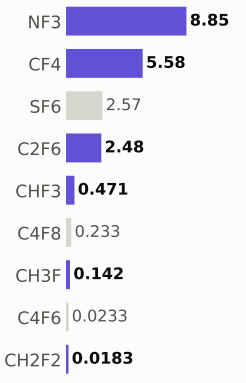

Step #21810: CMP

etch_cmp · CMP

0.169	1,175.1	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

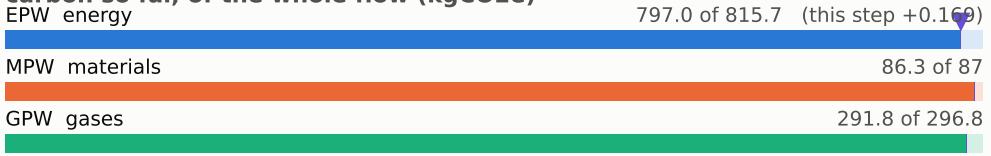

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

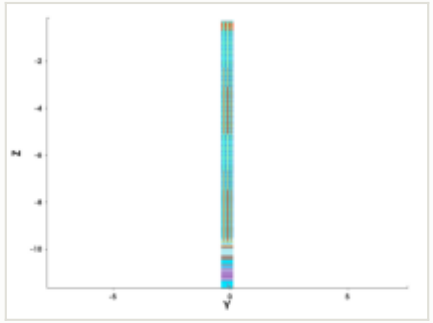

y cut at -0.150 µm

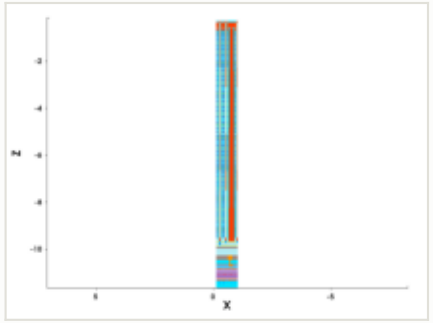

mask for this step

no mask for this step

steps by process area

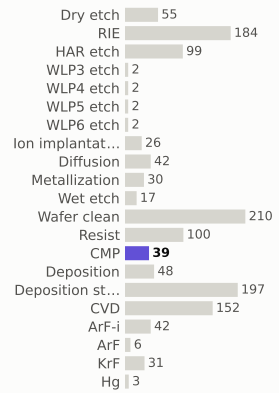

materials deposited (g)

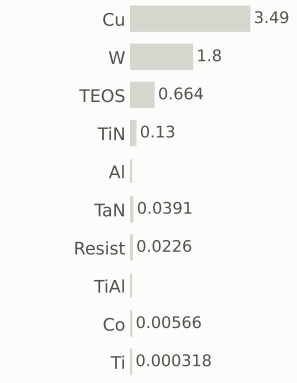

gases emitted (g)

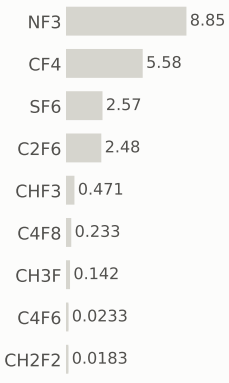

Step #21840: CVD

depo_fill · CVD

1.31	1,176.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

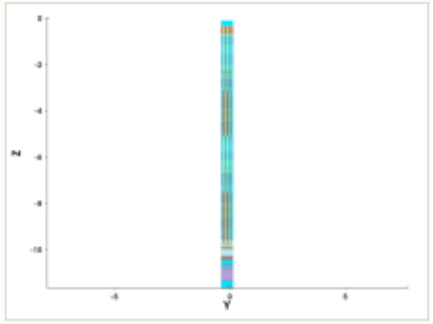

y cut at -0.150 µm

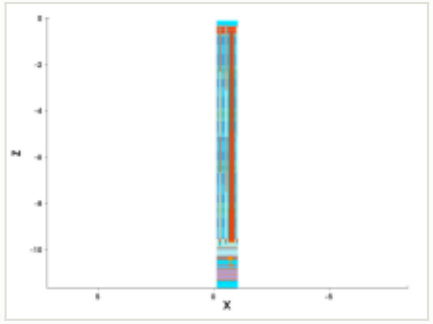

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.18 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

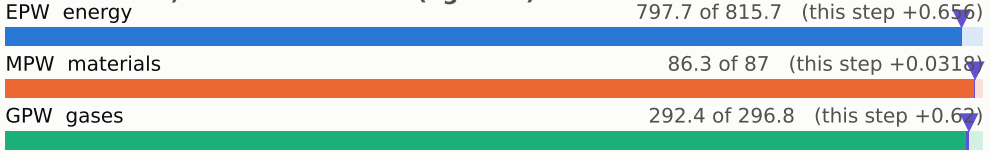

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

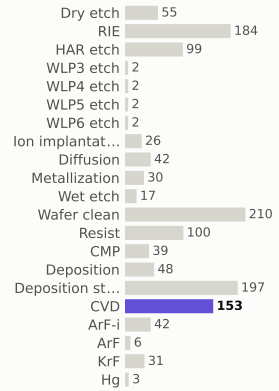

materials deposited (g)

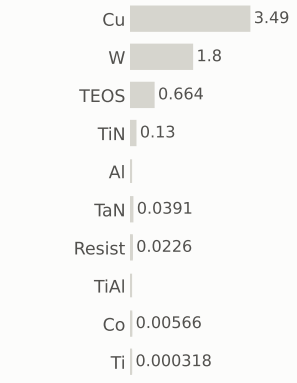

gases emitted (g)

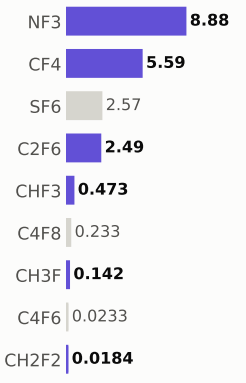

Step #21860: KrF

litho_patterning · KrF

0.199	1,176.6	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

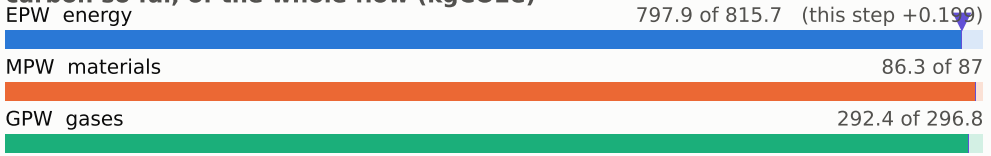

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

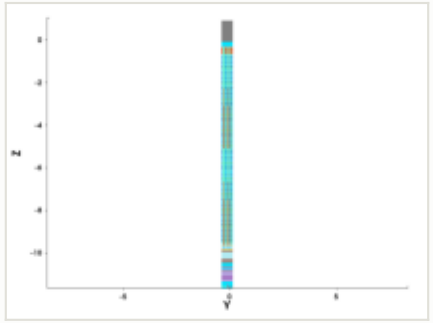

y cut at -0.150 µm

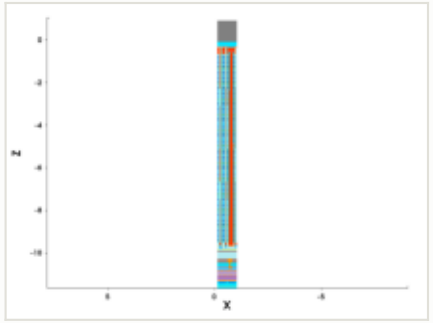

mask: layer 54:0, negative (GDSII)

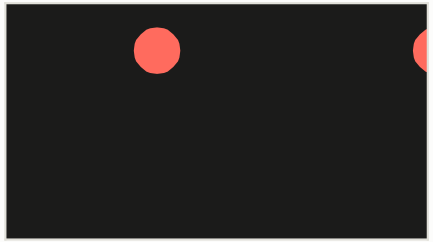

steps by process area

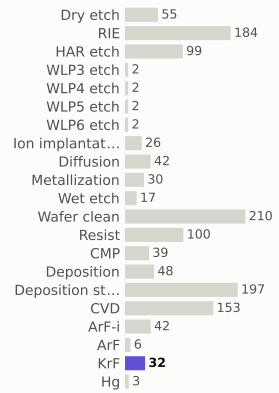

materials deposited (g)

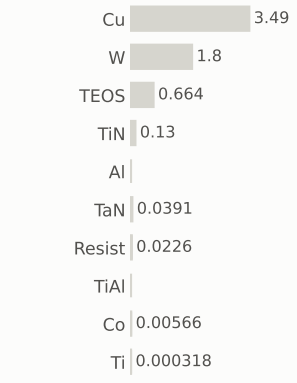

gases emitted (g)

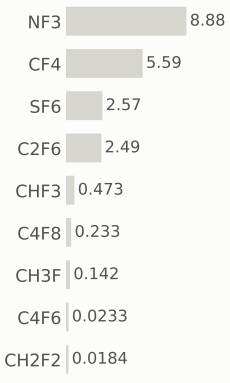

Step #21880: RIE

etch_anisotropic · RIE

1.04	1,177.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

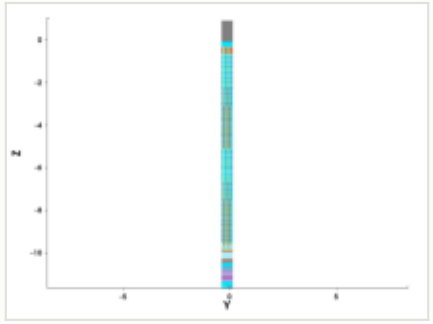

y cut at -0.150 µm

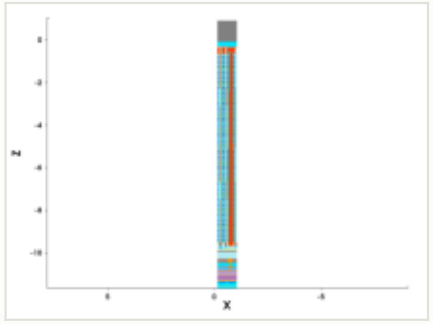

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

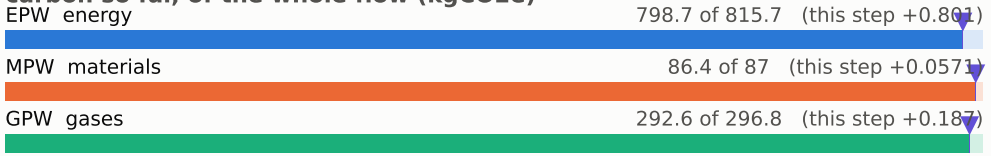

embodied carbon up to each step (kgCO2e per wafer)



steps by process area



materials deposited (g)



gases emitted (g)

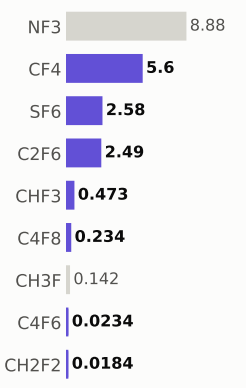

Step #21900: RIE

etch_anisotropic · RIE

1.04	1,178.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

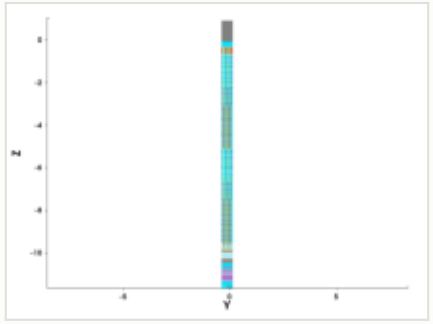

y cut at -0.150 µm

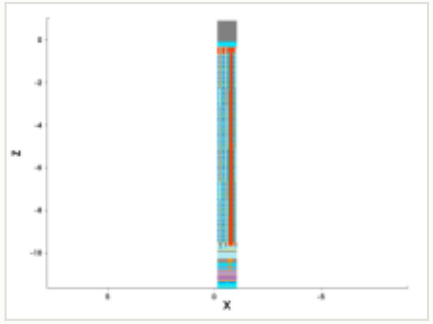

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

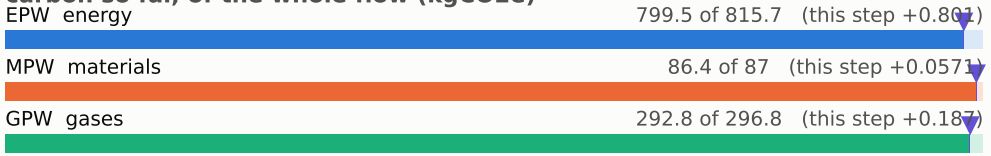

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

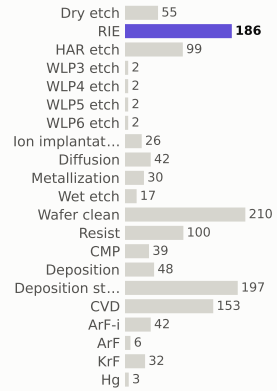

materials deposited (g)

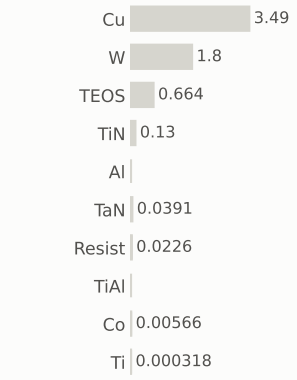

gases emitted (g)

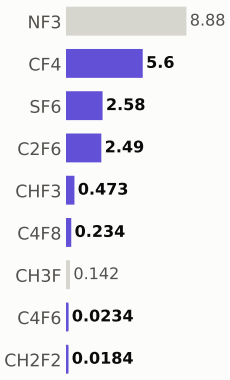

Step #21920: RIE

etch_anisotropic · RIE

1.04	1,179.7	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

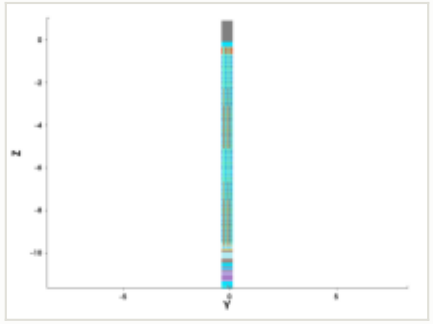

y cut at -0.150 µm

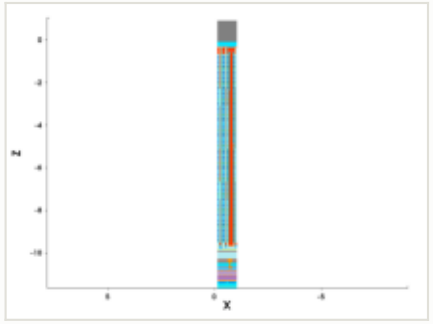

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

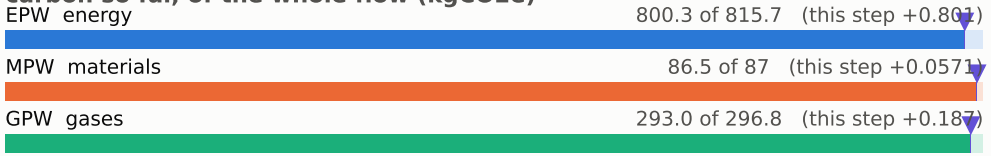

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

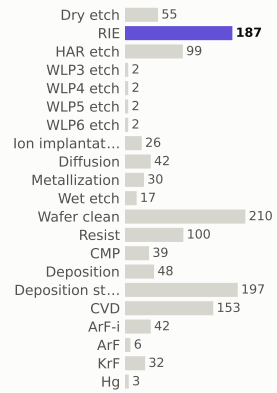

materials deposited (g)

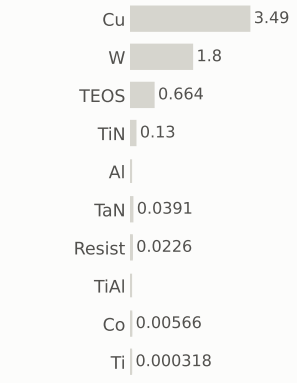

gases emitted (g)

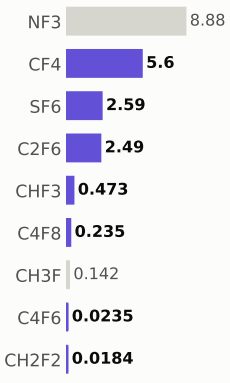

Step #21940: Dry_etch

etch_strip · Dry_etch

0.801	1,180.5	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

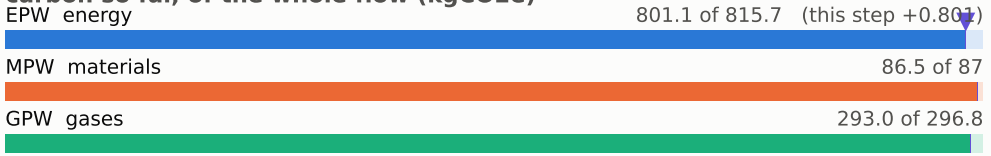

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

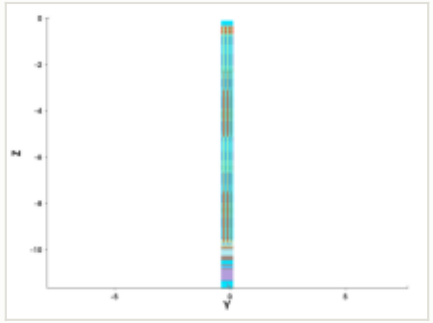

y cut at -0.150 µm

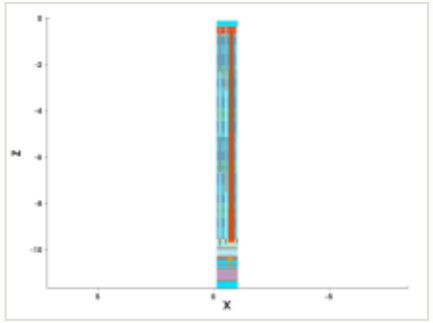

mask for this step

no mask for this step

steps by process area

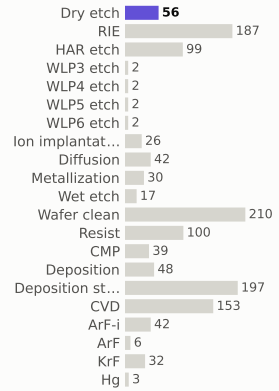

materials deposited (g)

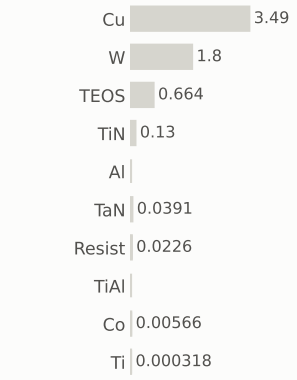

gases emitted (g)

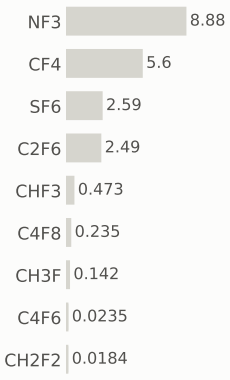

Step #21960: Wafer_clean

clean · Wafer_clean

0.169	1,180.7	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

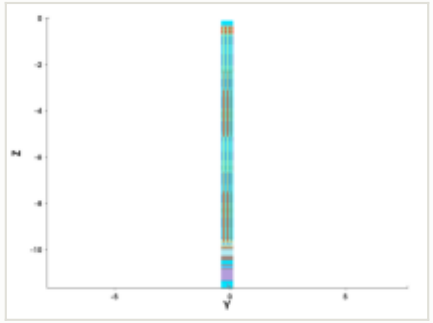

y cut at -0.150 µm

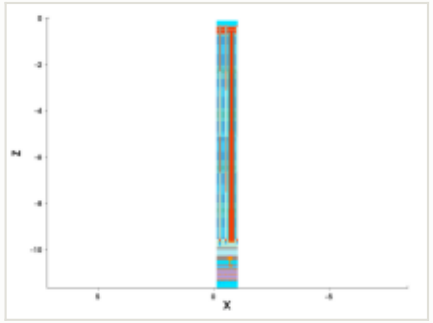

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

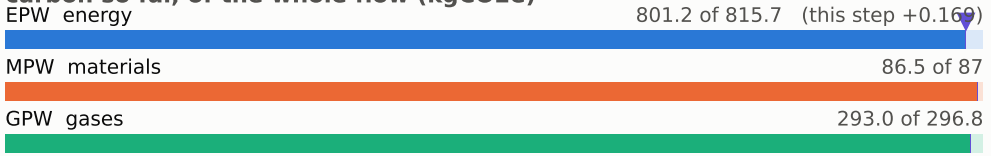

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

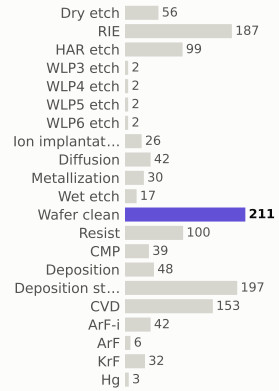

materials deposited (g)

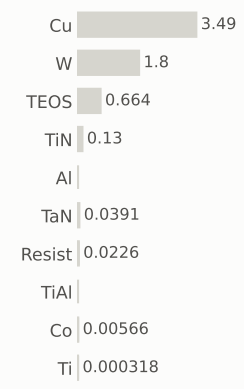

gases emitted (g)

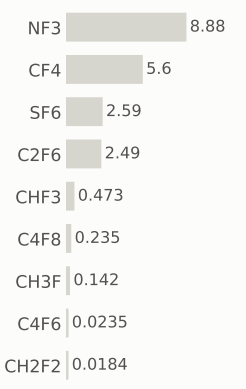

Step #21970: CVD

depo_isotropic · CVD

1.31	1,182.0	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

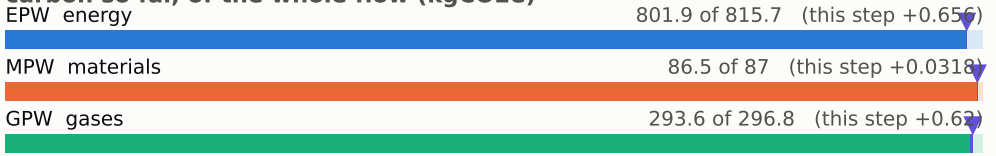

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

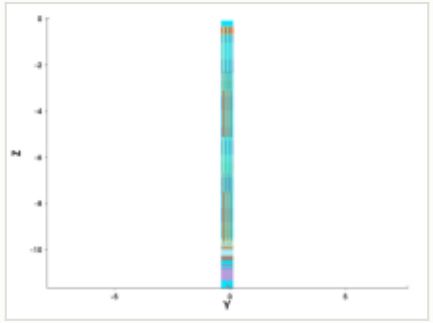

y cut at -0.150 µm

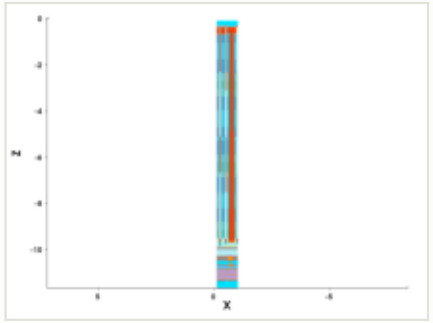

mask for this step

no mask for this step

steps by process area

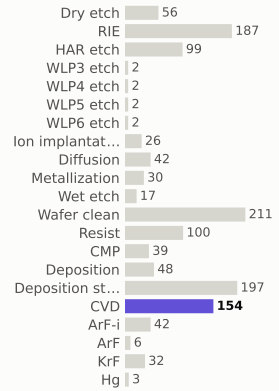

materials deposited (g)

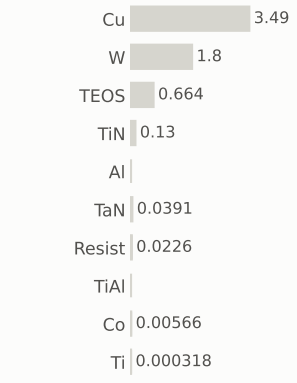

gases emitted (g)

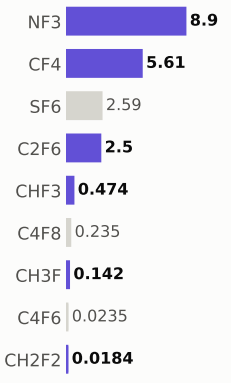

Step #21990: RIE

etch_anisotropic · RIE

1.04	1,183.1	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

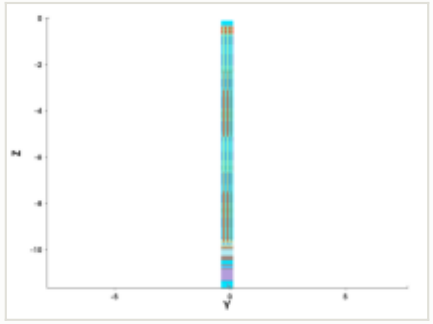

y cut at -0.150 µm

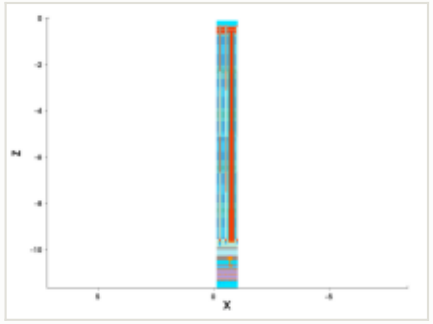

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

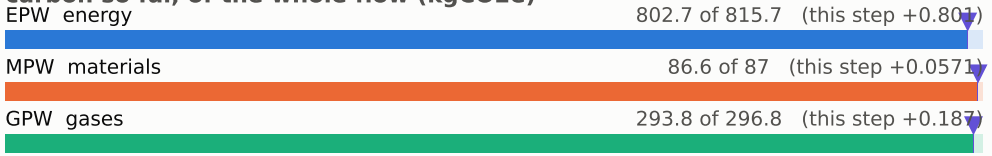

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

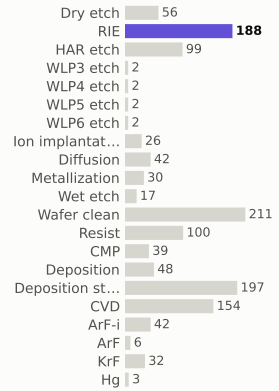

materials deposited (g)

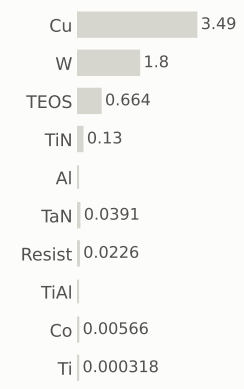

gases emitted (g)

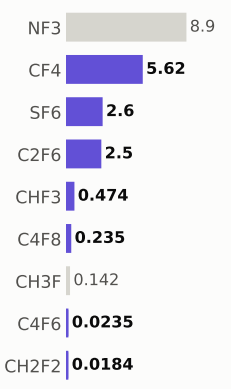

Step #22010: CVD

depo_isotropic · CVD

1.31	1,184.4	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

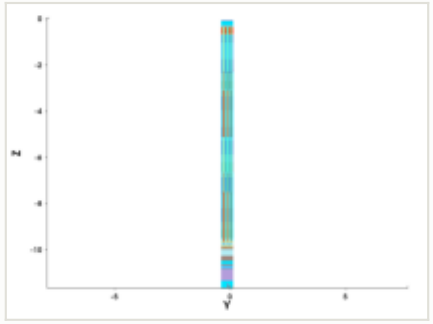

y cut at -0.150 µm

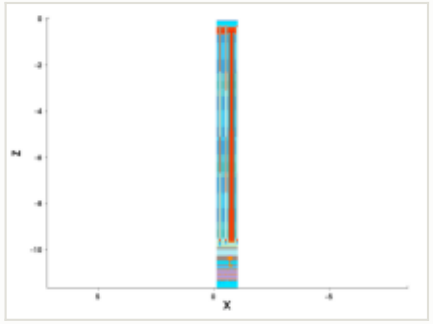

mask for this step

no mask for this step

this step

process area	CVD
material	TiN
thickness	0.02 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0321 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

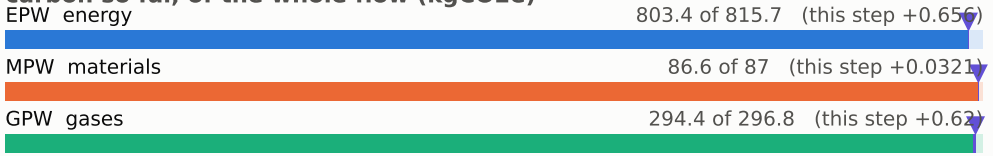

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

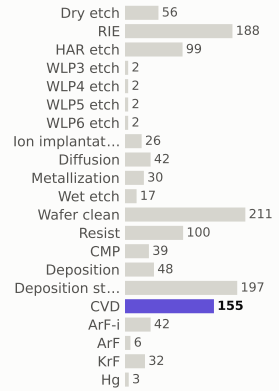

materials deposited (g)

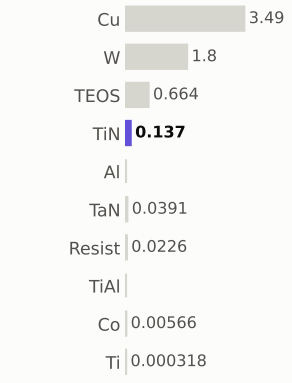

gases emitted (g)

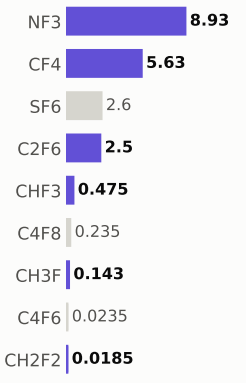

Step #22030: Metallization

depo_fill · Metallization

1.24	1,185.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

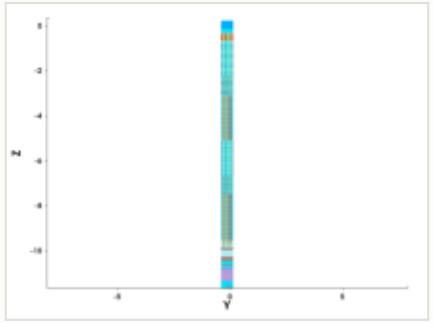

y cut at -0.150 µm

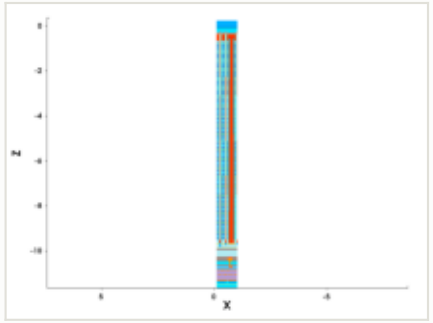

mask for this step

no mask for this step

this step

process area	Metallization
material	W
thickness	0.3 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.031 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.24 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

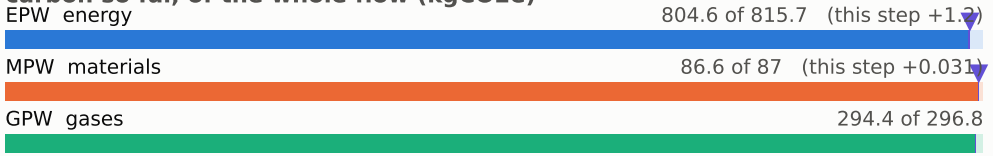

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

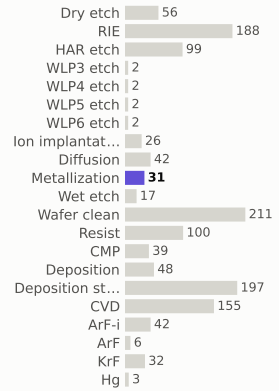

materials deposited (g)

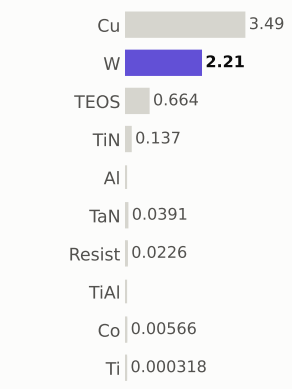

gases emitted (g)

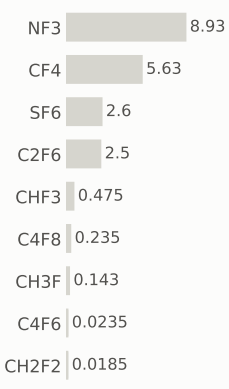

Step #22050: CMP

etch_cmp · CMP

0.169	1,185.8	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

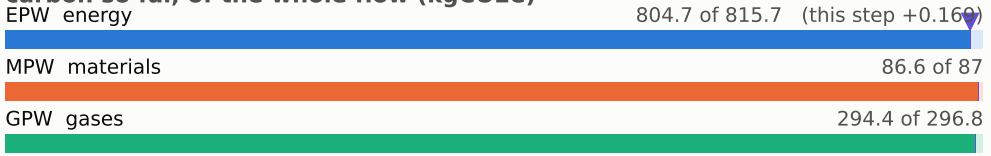

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

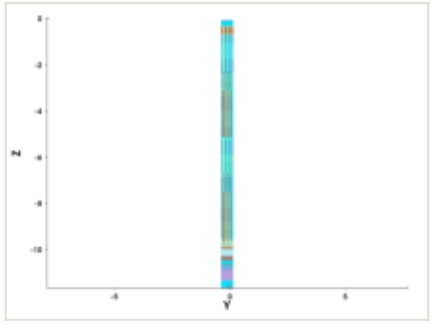

y cut at -0.150 µm

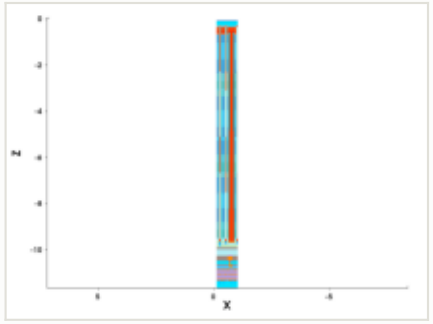

mask for this step

no mask for this step

steps by process area

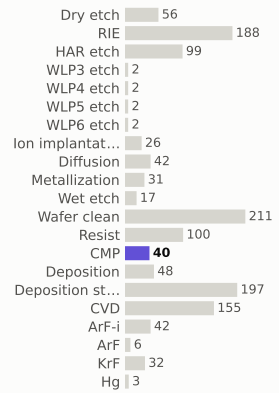

materials deposited (g)

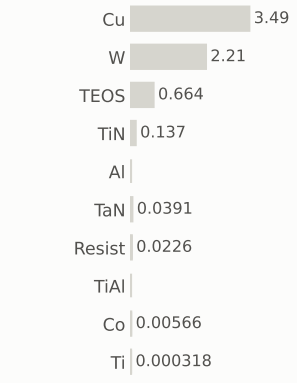

gases emitted (g)

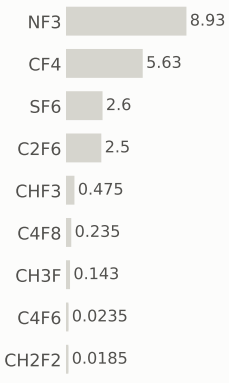

Step #22070: RIE

etch_anisotropic · RIE

1.04	1,186.8	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

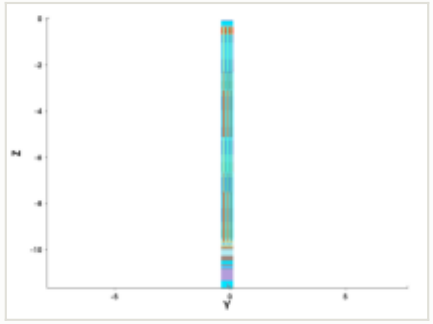

y cut at -0.150 µm

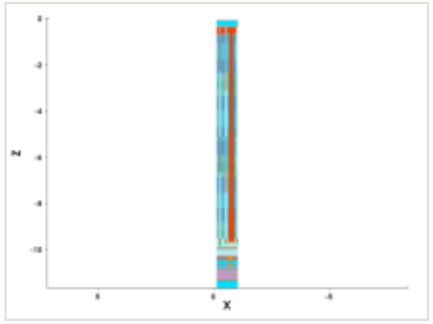

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

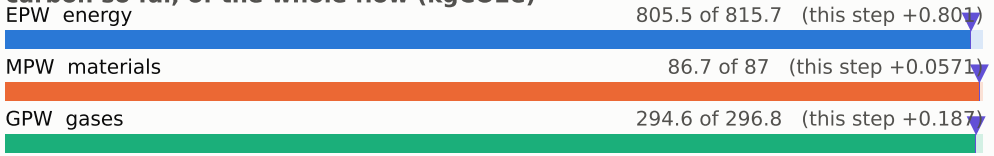

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

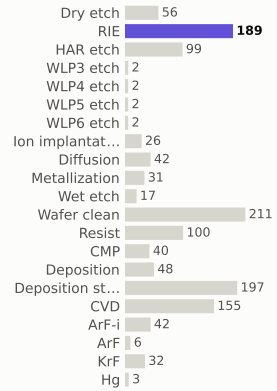

materials deposited (g)

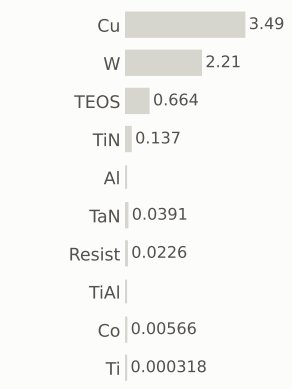

gases emitted (g)

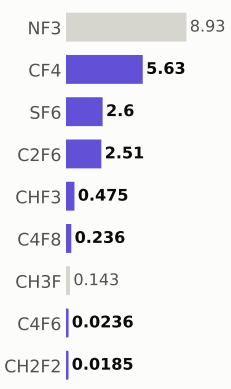

Step #22100: Metallization

depo_fill · Metallization

1.2	1,188.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

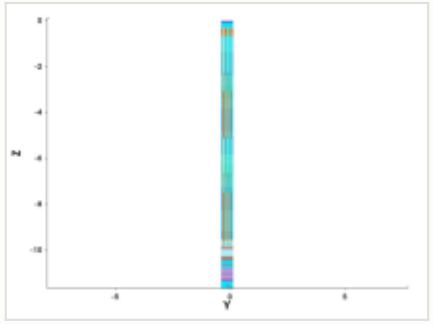

y cut at -0.150 µm

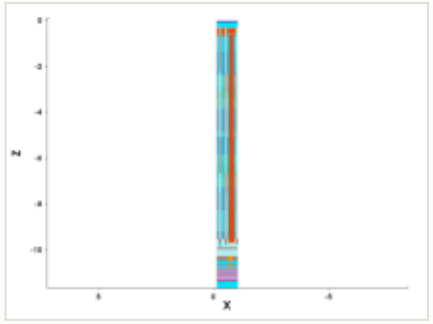

mask for this step

no mask for this step

this step

process area	Metallization
material	TiAl
thickness	0.06 µm
material GWP	29.1801 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.000446 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

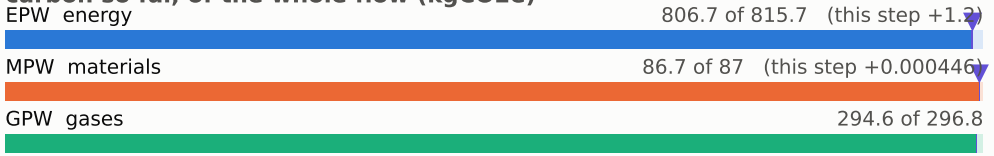

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

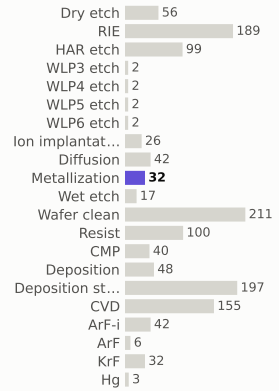

materials deposited (g)

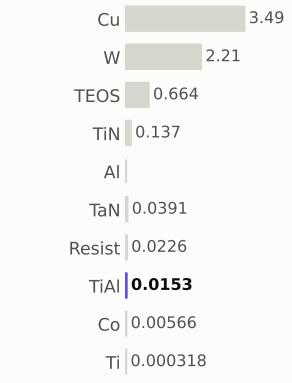

gases emitted (g)

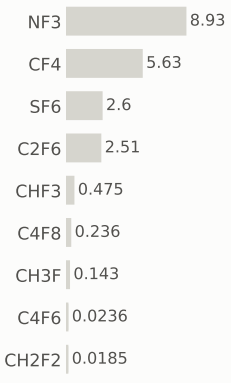

Step #22120: Metallization

depo_fill · Metallization

1.21	1,189.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	Metallization
material	Al
thickness	0.67 µm
material GWP	10.7269 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00137 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

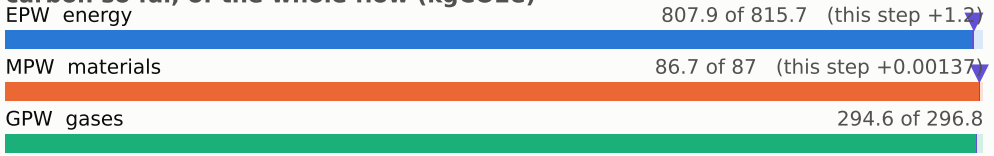

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

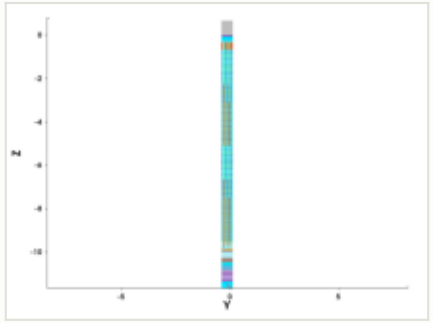

y cut at -0.150 µm

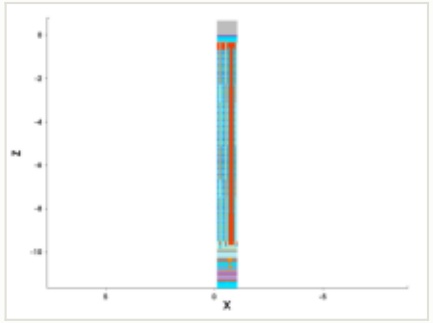

mask for this step

no mask for this step

steps by process area

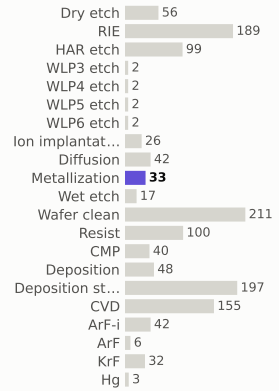

materials deposited (g)

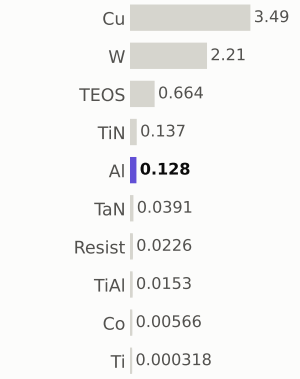

gases emitted (g)

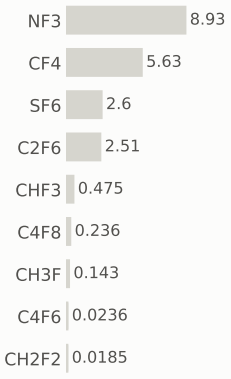

Step #22140: Deposition

depo_fill · Deposition

0.657	1,189.9	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

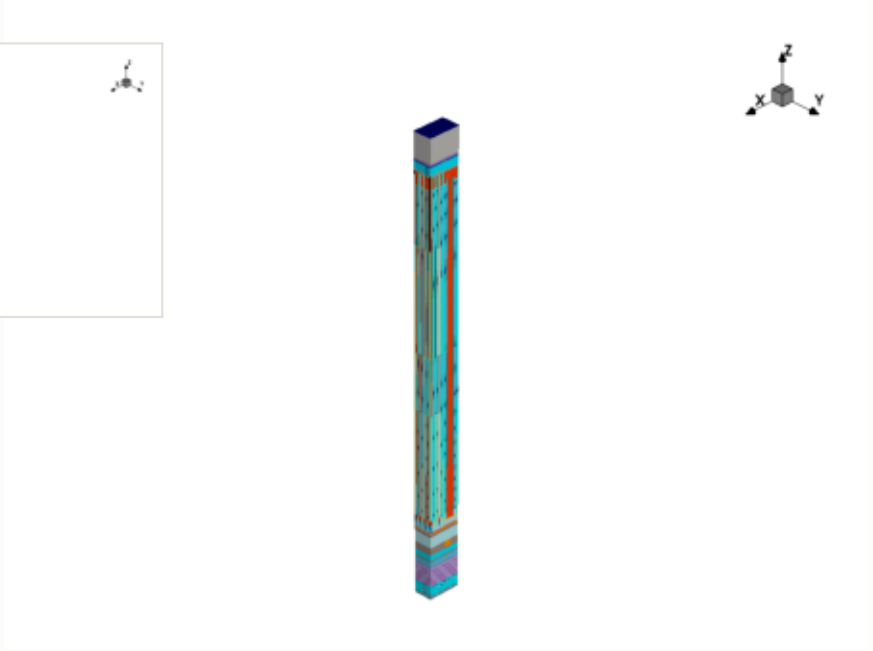

this step

process area	Deposition
material	TiN
thickness	0.02 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000324 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.657 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

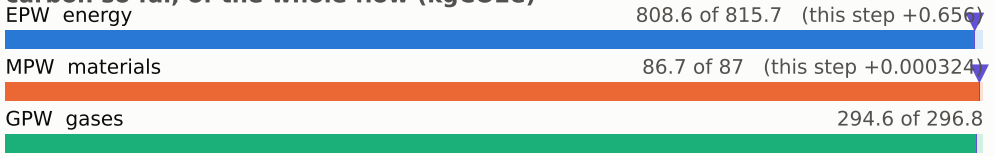

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

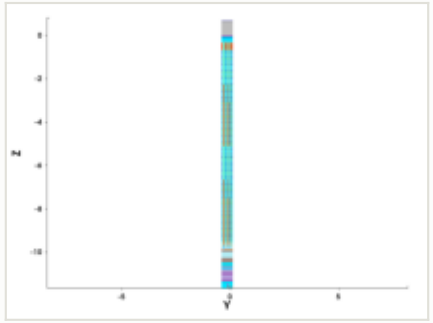

y cut at -0.150 µm

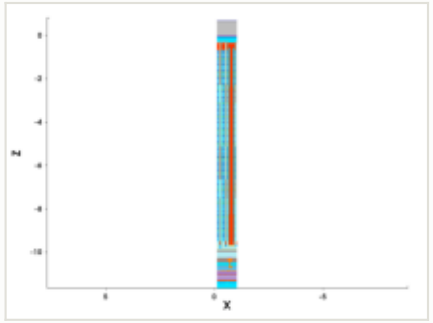

mask for this step

no mask for this step

steps by process area

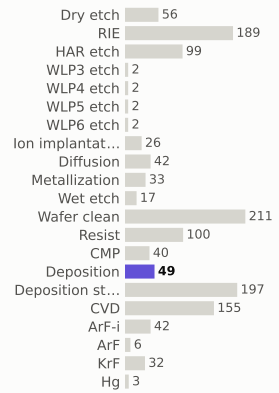

materials deposited (g)

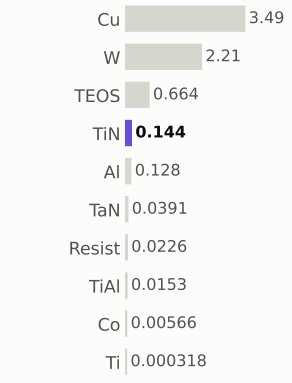

gases emitted (g)

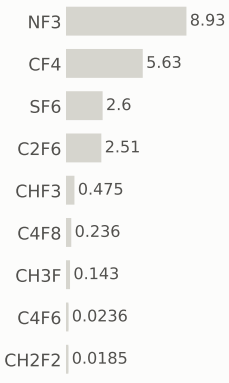

Step #22160: CVD

depo_fill · CVD

1.31	1,191.2	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

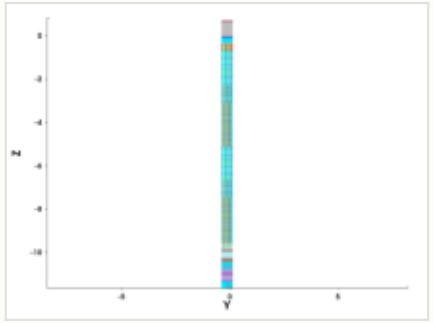

y cut at -0.150 µm

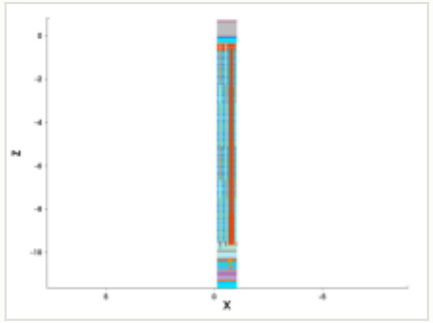

mask for this step

no mask for this step

this step

process area	CVD
material	—
thickness	0.025 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

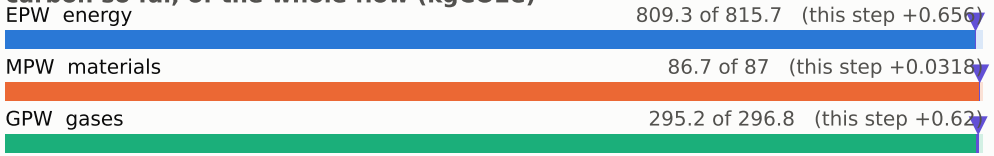

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

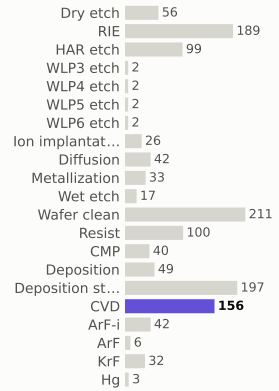

materials deposited (g)

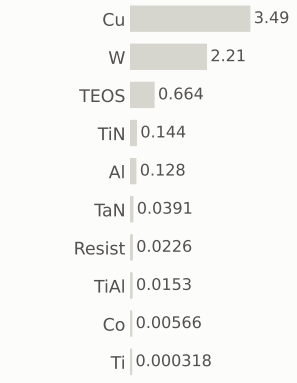

gases emitted (g)

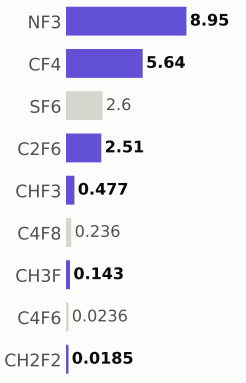

Step #22180: KrF

litho_patterning · KrF

0.199	1,191.4	0.017%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

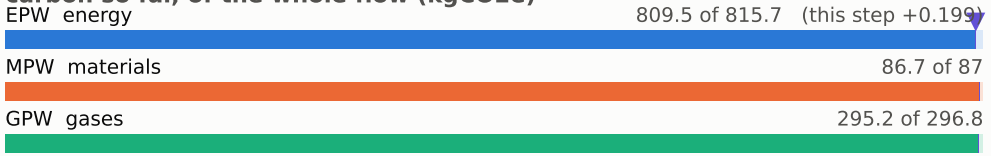

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

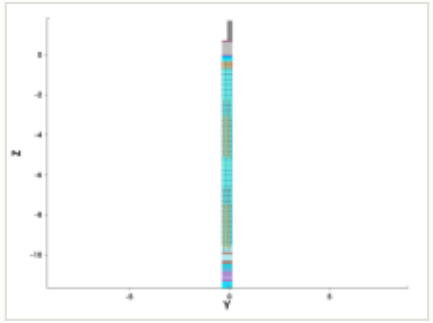

y cut at -0.150 µm

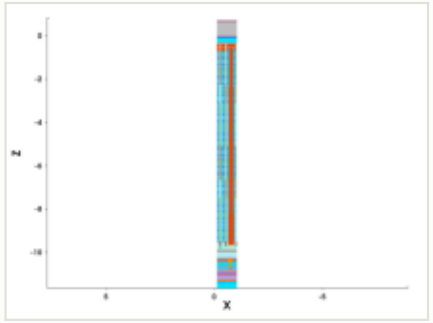

mask: layer 55:0, positive (GDSII)

steps by process area

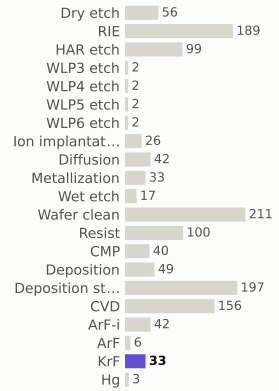

materials deposited (g)

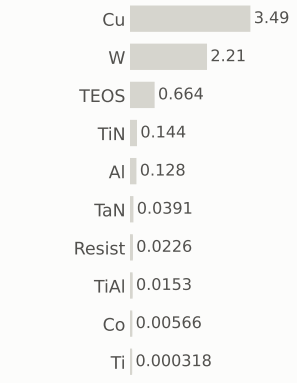

gases emitted (g)

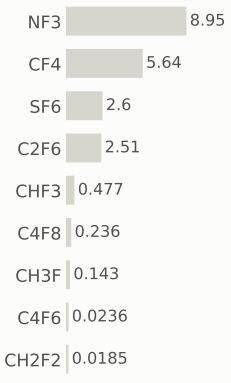

Step #22200: RIE

etch_anisotropic · RIE

1.04	1,192.4	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

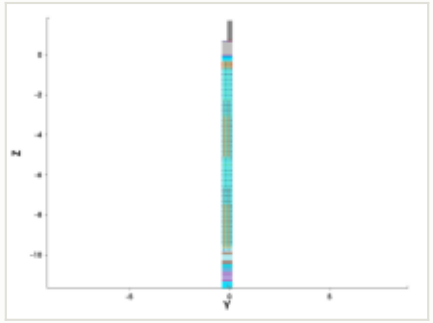

y cut at -0.150 µm

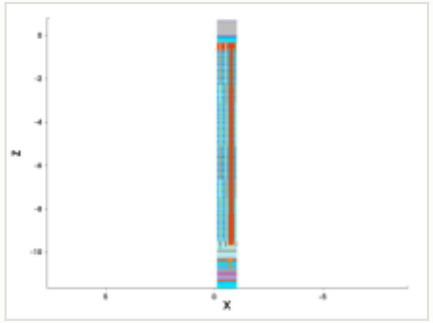

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

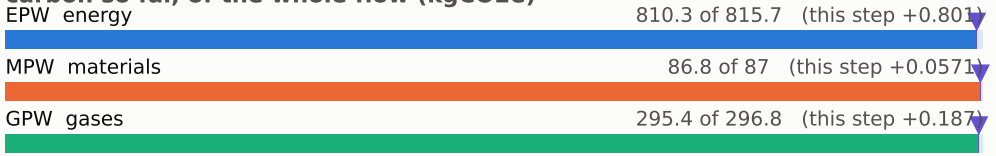

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

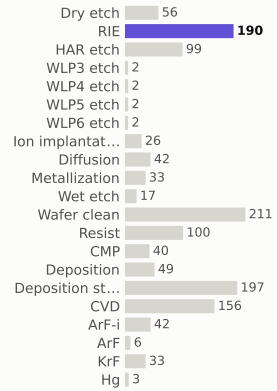

materials deposited (g)

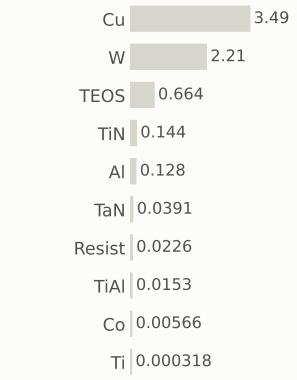

gases emitted (g)

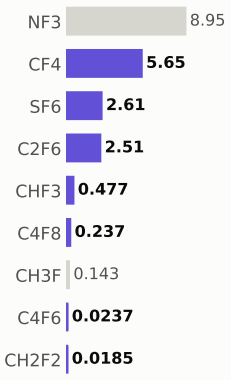

Step #22220: RIE

etch_anisotropic · RIE

1.04	1,193.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

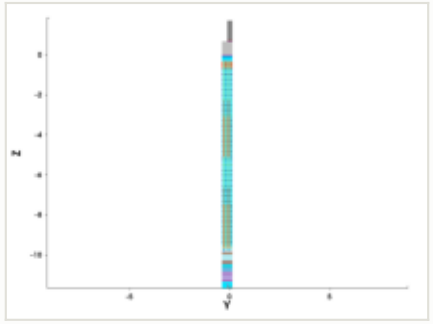

y cut at -0.150 µm

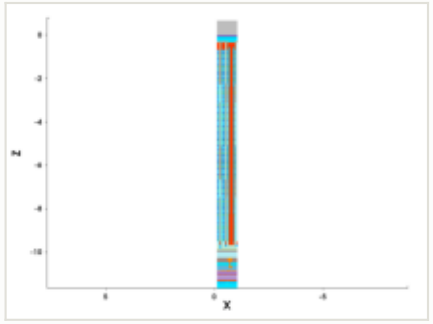

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

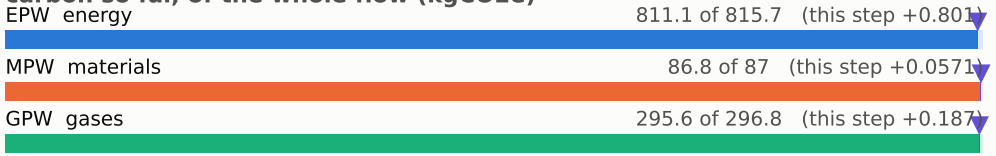

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

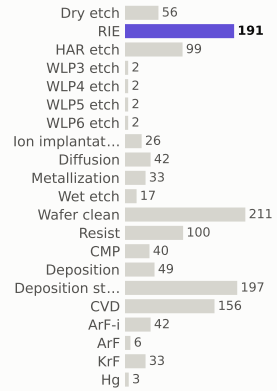

materials deposited (g)

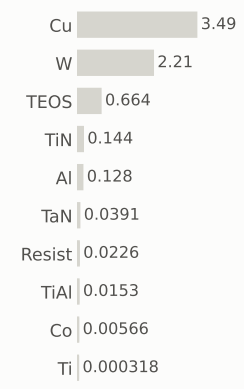

gases emitted (g)

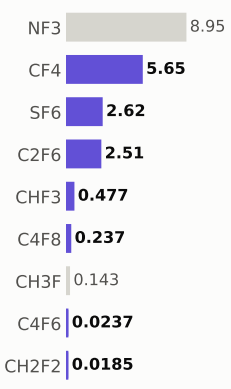

Step #22240: RIE

etch_anisotropic · RIE

1.04	1,194.5	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

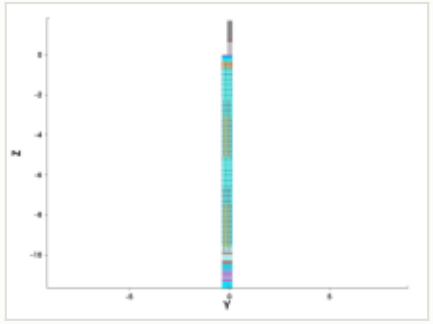

y cut at -0.150 µm

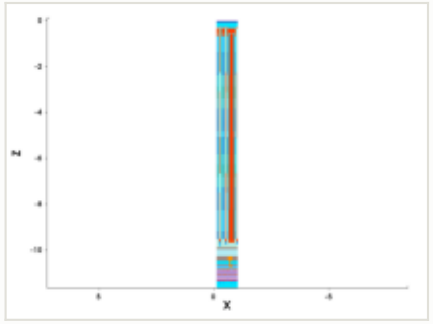

mask for this step

no mask for this step

this step

process area	RIE	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

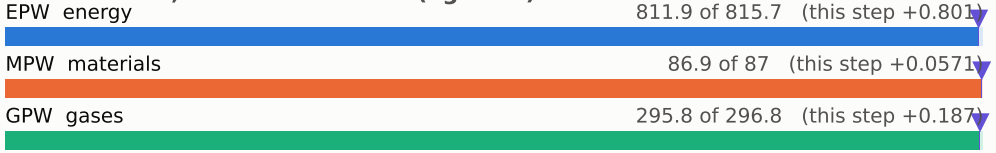

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

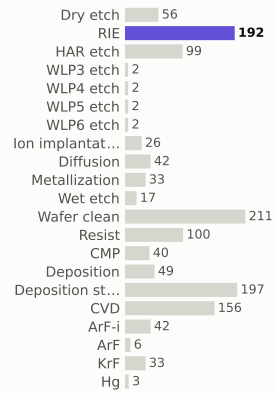

materials deposited (g)

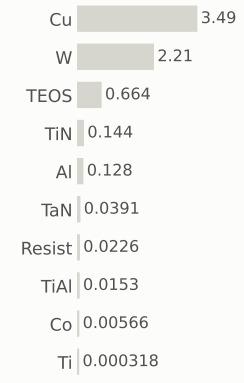

gases emitted (g)

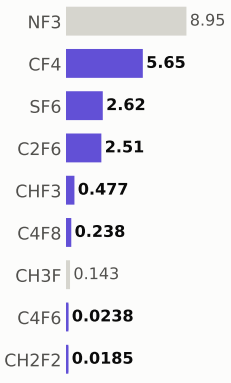

Step #22260: RIE

etch_anisotropic · RIE

1.04	1,195.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

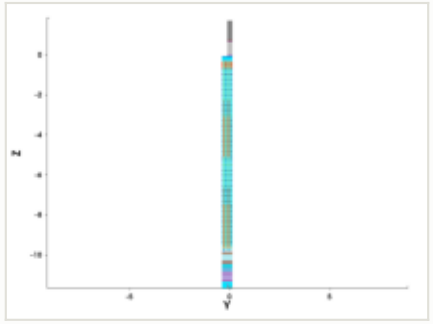

y cut at -0.150 µm

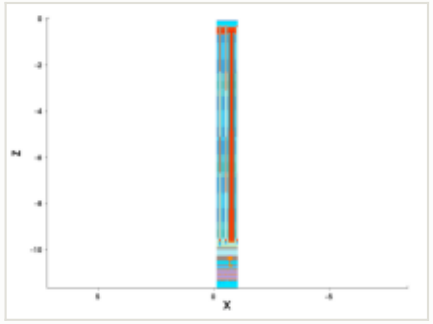

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

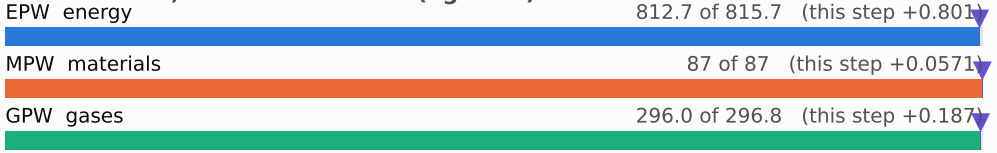

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

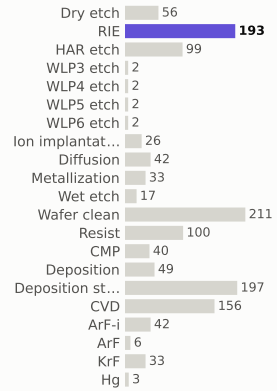

materials deposited (g)

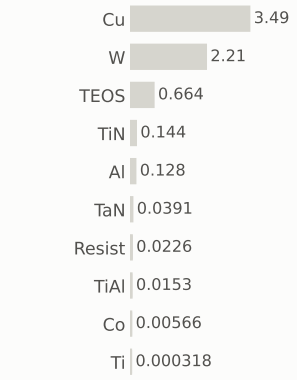

gases emitted (g)

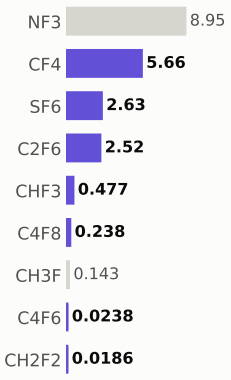

Step #22280: RIE

etch_anisotropic · RIE

1.04	1,196.6	0.087%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

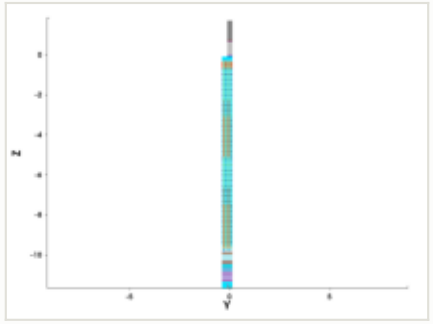

y cut at -0.150 µm

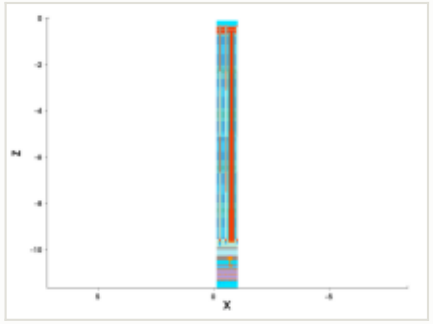

mask for this step

no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

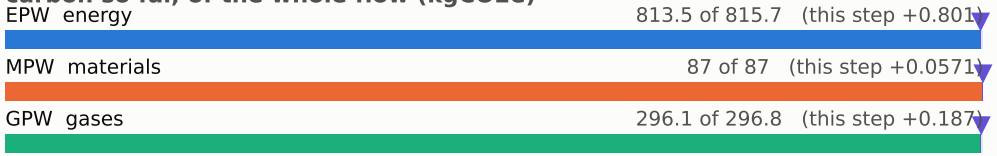

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

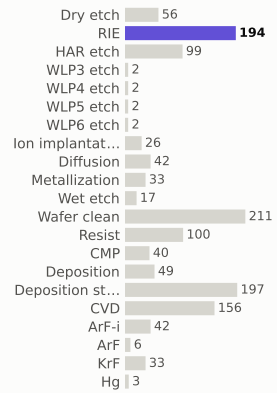

materials deposited (g)

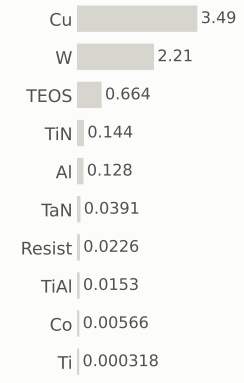

gases emitted (g)

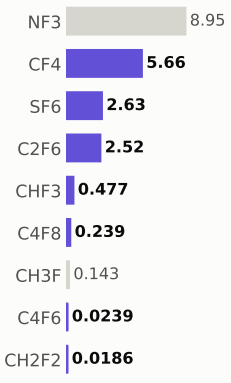

Step #22300: Dry_etch

etch_strip · Dry_etch

0.801	1,197.4	0.067%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

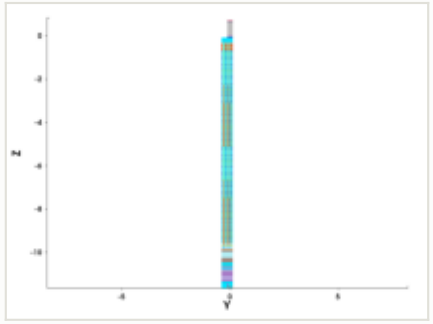

y cut at -0.150 µm

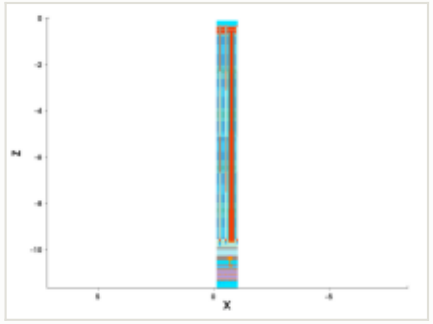

mask for this step

no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

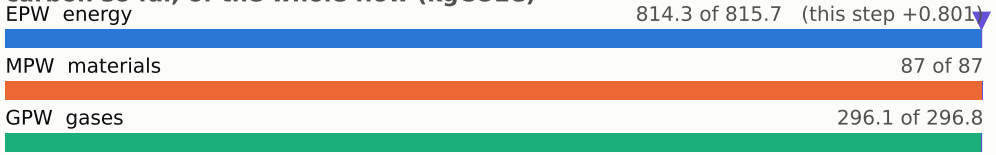

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

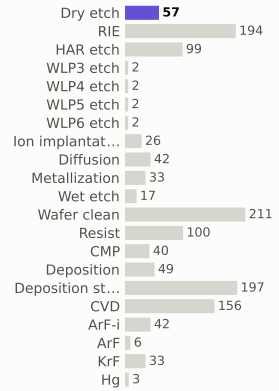

materials deposited (g)



gases emitted (g)



Step #22320: Wafer_clean

clean · Wafer_clean

0.169	1,197.6	0.014%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

x cut at -0.570 µm

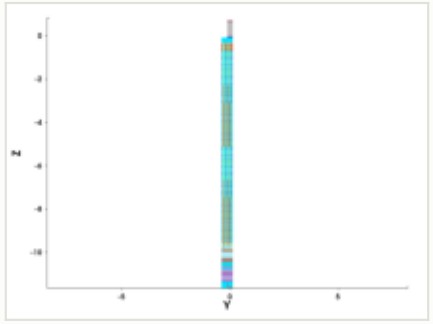

y cut at -0.150 µm

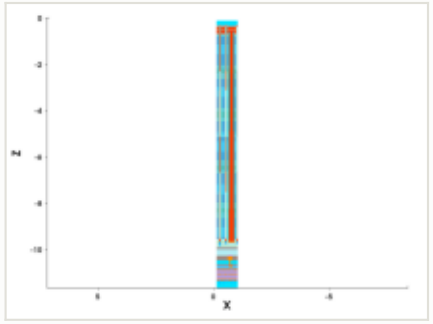

mask for this step

no mask for this step

this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)

carbon so far, of the whole flow (kgCO2e)

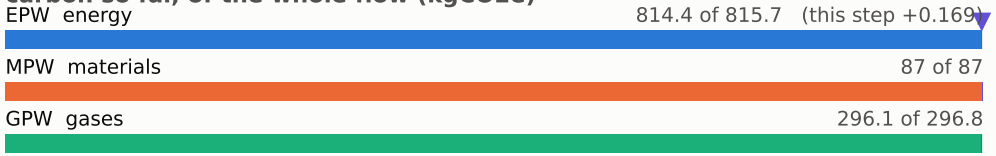

embodied carbon up to each step (kgCO2e per wafer)



steps by process area

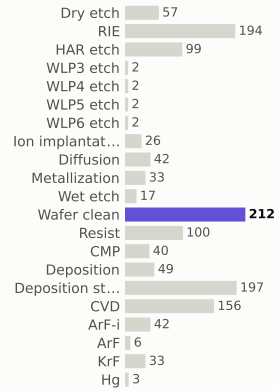

materials deposited (g)

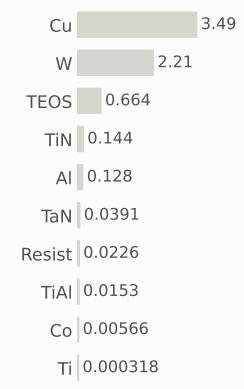

gases emitted (g)

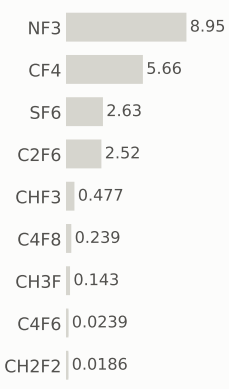

Step #22340: Deposition

depo_isotropic · Deposition

0.656	1,198.2	0.055%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



this step

process area	Deposition
material	—
thickness	0.9 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

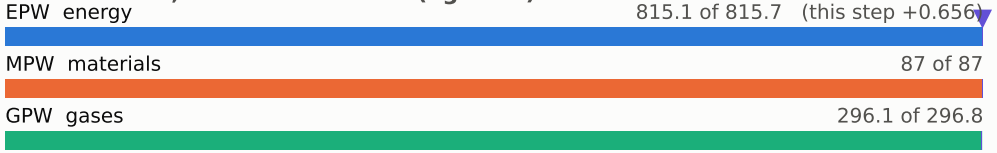

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

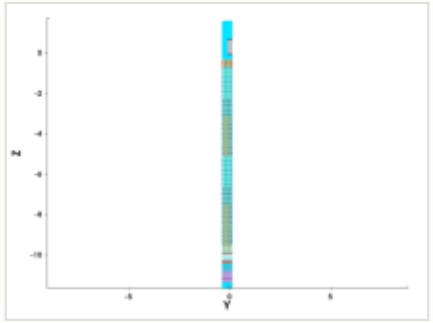

y cut at -0.150 µm

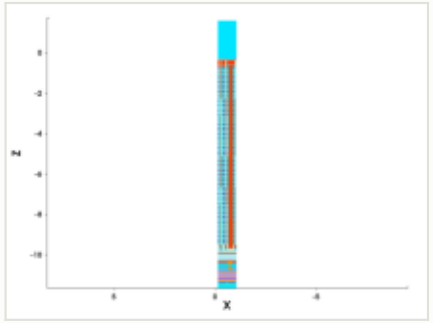

mask for this step

no mask for this step

steps by process area

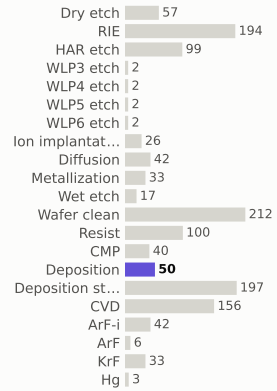

materials deposited (g)

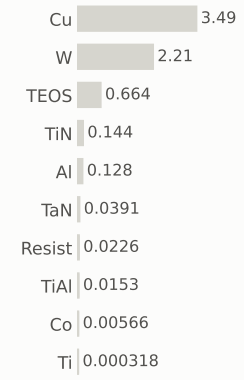

gases emitted (g)

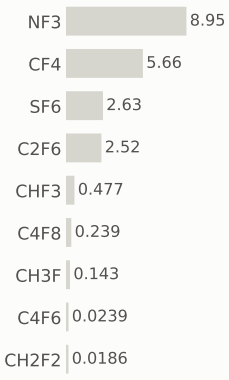

Step #22360: CVD

depo_isotropic · CVD

1.31	1,199.6	0.11%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

this step

process area	CVD
material	—
thickness	1.2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**

carbon so far, of the whole flow (kgCO2e)

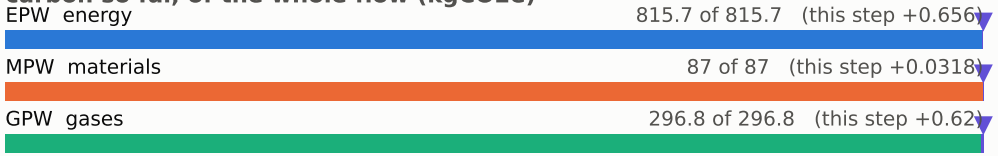

embodied carbon up to each step (kgCO2e per wafer)



x cut at -0.570 µm

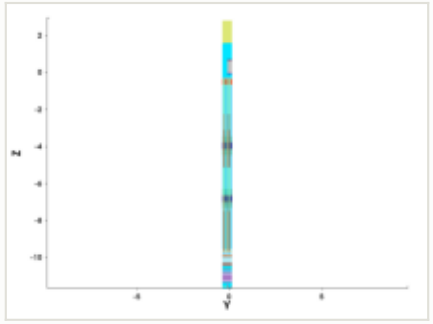

y cut at -0.150 µm

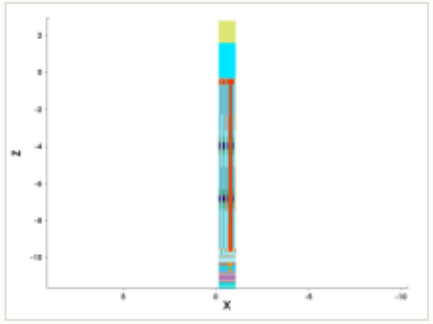

mask for this step

no mask for this step

steps by process area

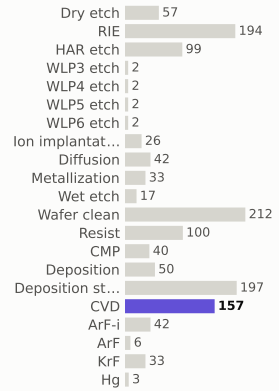

materials deposited (g)

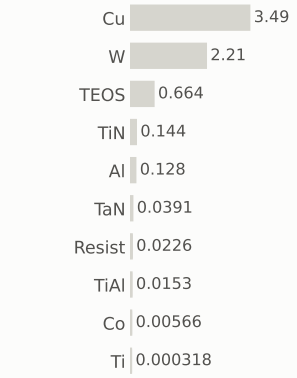

gases emitted (g)



Carbon by module

kgCO2e per wafer, in flow order (steps in brackets)

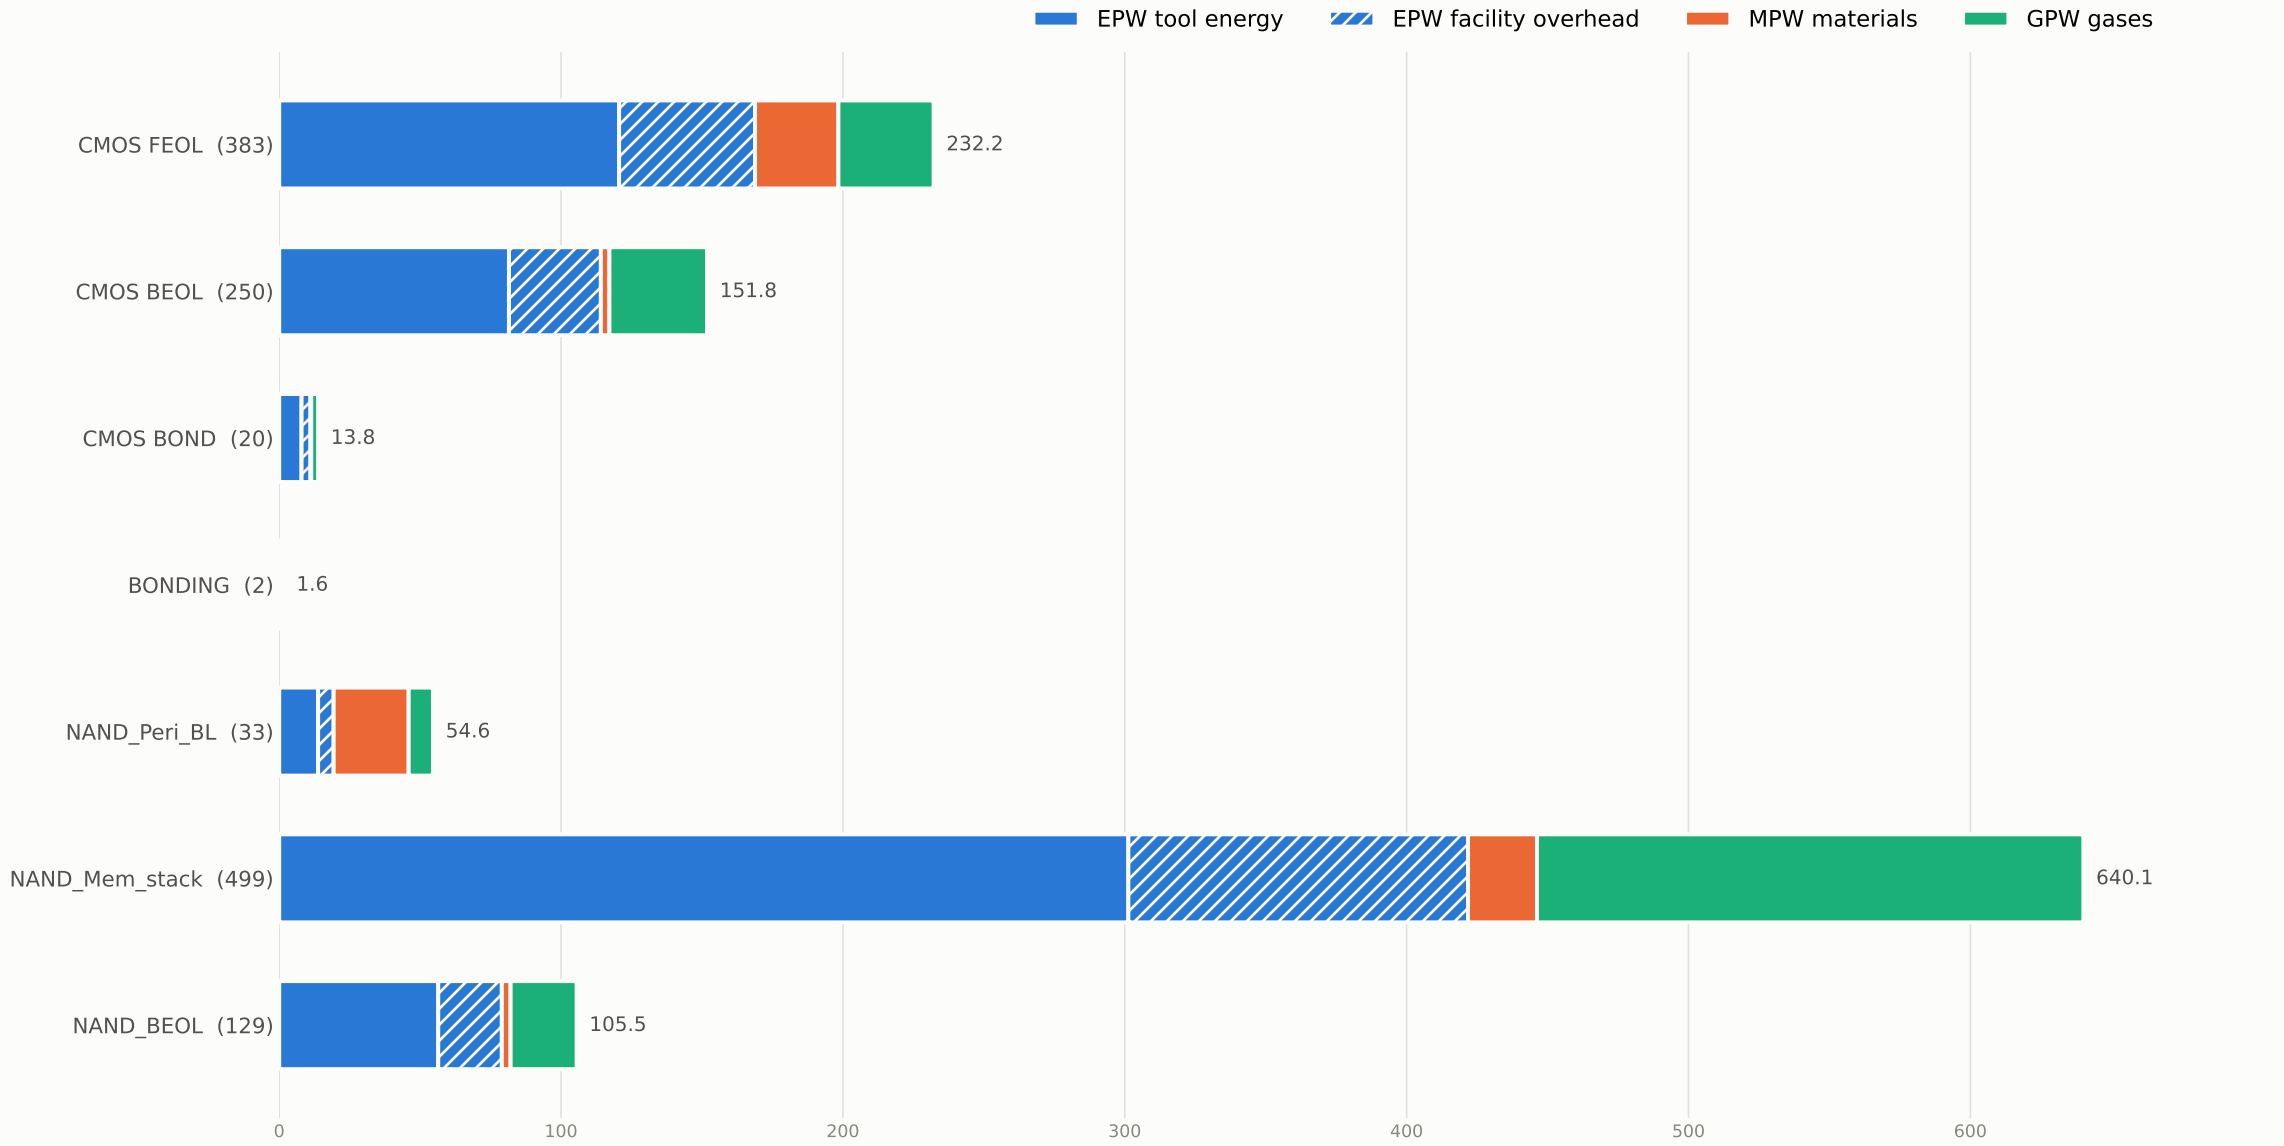

Totals by process area

kgCO2e per wafer; EPW = tool + facility overhead (overhead energy = tool energy x 0.4)

process area	steps	tool kWh	overhead kWh	EPW tool	EPW overhead	EPW	MPW	GPW	total
Deposition_stack	197	214.18	85.67	92.10	36.84	128.94	6.24	121.92	257.10
HAR_etch	99	263.34	105.34	113.24	45.29	158.53	11.30	37.04	206.87
CVD	157	171.13	68.45	73.59	29.43	103.02	4.99	97.41	205.42
RIE	194	258.02	103.21	110.95	44.38	155.33	11.07	36.29	202.69
Dry_etch	57	75.81	30.32	32.60	13.04	45.64	0.00	0.00	45.64
Metallization	33	66.00	26.40	28.38	11.35	39.73	0.18	0.00	39.92
Wafer_clean	212	59.36	23.74	25.52	10.21	35.73	0.00	0.00	35.73
Diffusion	42	55.86	22.34	24.02	9.61	33.63	0.00	0.00	33.63
Deposition	50	54.50	21.80	23.43	9.37	32.81	0.00	0.00	32.81
Ion_implantation	26	34.58	13.83	14.87	5.95	20.82	0.00	0.00	20.82
Resist	100	28.00	11.20	12.04	4.82	16.86	0.00	0.00	16.86
ArF-i	42	15.12	6.05	6.50	2.60	9.10	0.00	0.00	9.10
WLP3_etch	2	10.66	4.26	4.58	1.83	6.42	0.46	1.50	8.37
WLP4_etch	2	10.66	4.26	4.58	1.83	6.42	0.46	1.50	8.37
CMP	40	11.20	4.48	4.82	1.93	6.74	0.00	0.00	6.74
KrF	33	10.89	4.36	4.68	1.87	6.56	0.00	0.00	6.56
WLP5_etch	2	5.34	2.14	2.30	0.92	3.21	0.23	0.75	4.19
Wet_etch	17	4.76	1.90	2.05	0.82	2.87	0.00	0.00	2.87
WLP6_etch	2	2.66	1.06	1.14	0.46	1.60	0.11	0.37	2.09
ArF	6	1.98	0.79	0.85	0.34	1.19	0.00	0.00	1.19
Hg	3	0.99	0.40	0.43	0.17	0.60	0.00	0.00	0.60