cryo_176L

process design review · 900 steps · generated by CarbonEDA v0 on 2026-11-05 14:58 EST

786.3

kgCO2e per wafer start



540.4
EPW energy · 69%

44.4
MPW materials · 6%

201.4
GPW gases · 26%

wafer 300 mm · yield 1 · carbon intensity 0.43 kgCO2e/kWh · facility overhead 0.4 x tool energy
EPW 540.4 = tool 386.0 + facility overhead 154.4 kgCO2e (898 + 359 kWh)

flow technologies/flash/cryo_176L/cryo_176L_final.csv
layout technologies/flash/cryo_176L/cryo_176L_layout.oas
structure images from the spx run of 2026-11-04 02:02:02

CarbonEDA parameters

config/carbon_config.yaml and materials.yaml as used for every number in this report

EPW energy

(tool + 0.4 x tool facility overhead) x 0.43 kgCO2e/kWh

process area	kWh / step	steps
Dry_etch	1.33	47
RIE	1.33	146
Cryo_etch	0.835	198
WLP3_etch	5.33	2
WLP4_etch	5.33	2
WLP5_etch	2.67	2
WLP6_etch	1.33	2
Ion_implantation	1.33	30
Diffusion	1.33	16
Metallization	2	15
Wet_etch	0.28	9
Wafer_clean	0.28	79
Resist	0.28	1
CMP	0.28	21
Deposition	1.09	14
Deposition_stack	0.545	197
CVD	1.09	73
ArF-i	0.36	6
ArF	0.33	9
KrF	0.33	20
Hg	0.33	11

GPW process gases

kg x (1 - utilization) x (1 - abatement) x GWP, plus byproducts kg/kg x (1 - abatement) x GWP; defaults: utilization 1.0, abatement 0.9

area	gas	g / step	upstream*	utilization	abatement	byproducts (kg per kg gas)
CVD	NF3	2.54	12.5	0.8	0.95	CF4 0.046, C2F6 0.045, CHF3 0.025, CH2F2 0.00086,...
Deposition_stack	NF3	1.27	12.5	0.8	0.95	CF4 0.046, C2F6 0.045, CHF3 0.025, CH2F2 0.00086,...
WLP3_etch	C4F8	0.641	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP3_etch	SF6	1.76	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP4_etch	C4F8	0.641	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP4_etch	SF6	1.76	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP5_etch	C4F8	0.321	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP5_etch	SF6	0.878	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
WLP6_etch	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
WLP6_etch	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
RIE	C4F8	0.16	12.1	0.82	0.98	CF4 0.045, C2F6 0.031, C4F6 0.018, CHF3 0.012, CH...
RIE	SF6	0.439	125.6	0.71	0.95	CF4 0.04, C2F6 0.044, CHF3 0.0037, CH2F2 2.9e-05
Cryo_etch	CF4	0.0241	12.6	0.35	0.89	C2F6 0.079, C4F8 0.00063, CHF3 0.011, CH3F 0.008

* kgCO2e per kg of gas made, counted in MPW

GWP (kgCO2e per kg, 100-yr) and abatement of every gas emitted

gas	GWP	abatement
CF4	7390	0.89
C2F6	12200	0.95
C4F6	0	0.98
C4F8	10300	0.98
CHF3	14800	0.98

gas	GWP	abatement
CH2F2	675	0.98
CH3F	116	0.98
NF3	17200	0.95
SF6	22800	0.95

CarbonEDA parameters (continued)

MPW materials

blanket film over a 300 mm wafer: thickness x area x density x GWP; the wafer itself 26000 gCO2e (300 mm); yield 1

material	g/cm³	gCO2e/g
Ti	4.5	47.63
WN	17.8	76.83
WSiN	16.1	73.23
W	19.3	75.81
TiN	5.21	43.98
TEOS	0.94	2.86
TaN	13.7	25.82
Cu	8.96	6.09
Al	2.7	10.73


Step #20: Wafer


substrate · Wafer

26	26	3.3%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

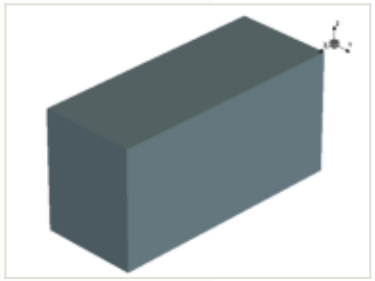

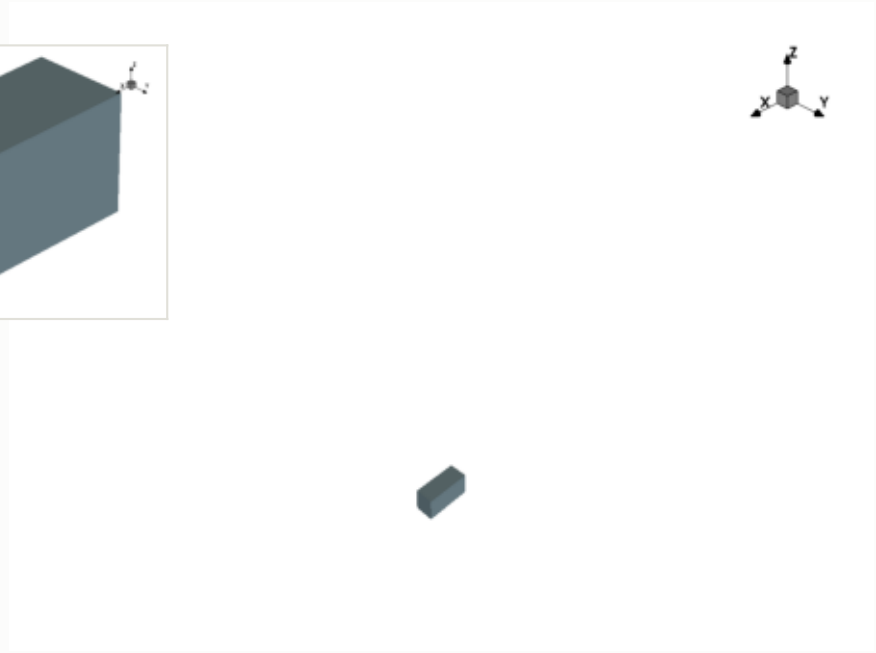

this step

process area	Wafer
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	26 kgCO2e
GPW	0 kgCO2e
embodied carbon	**26 kgCO2e**

Wafer step: not counted as a process step (uncounted_process_areas)


carbon so far, of the whole flow (kgCO2e)




embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

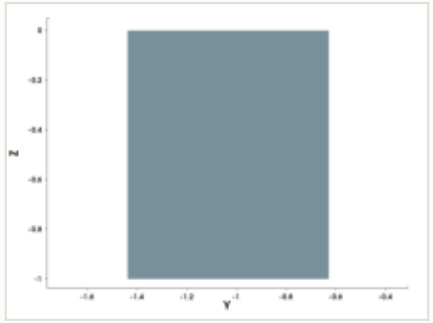


y cut at -1.035 µm

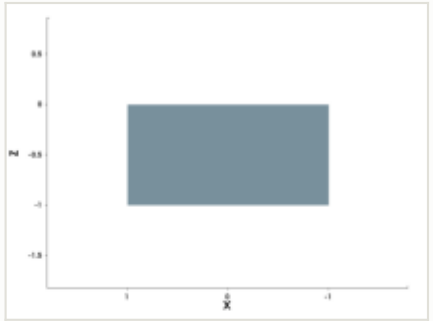


mask for this step

no mask for this step


steps by process area



materials deposited (g)

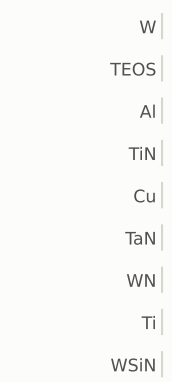

gases emitted (g)

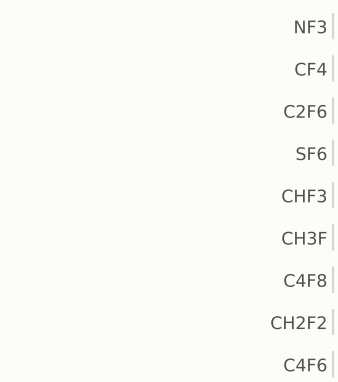


Step #30: Dry_etch


marking · Dry_etch

0.801	26.8	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

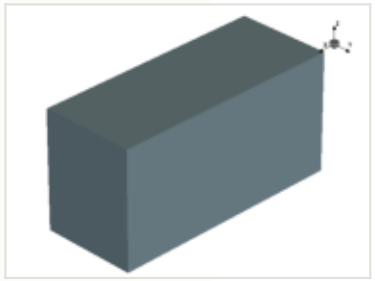

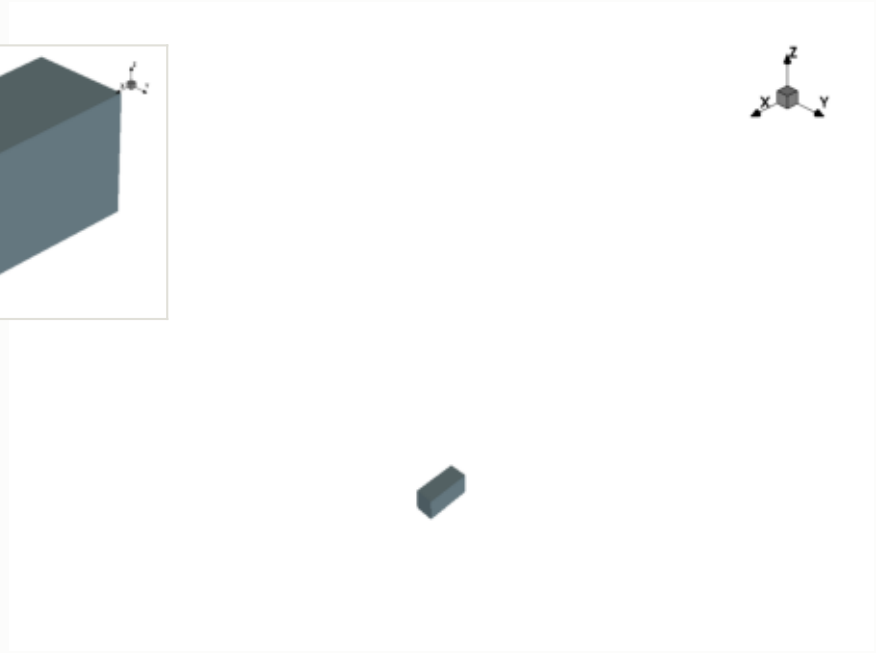


this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

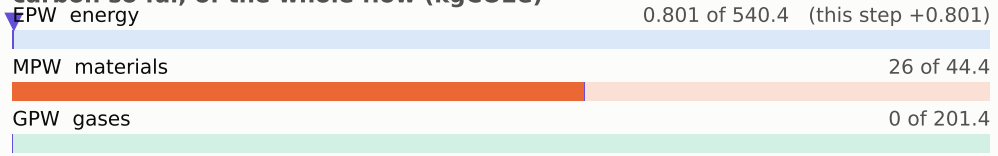


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

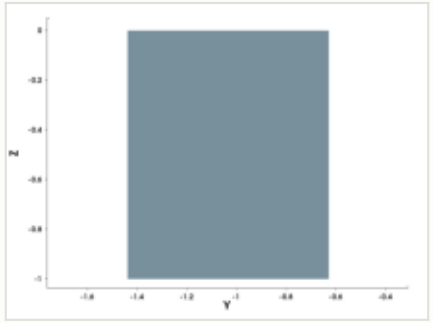

y cut at -1.035 µm

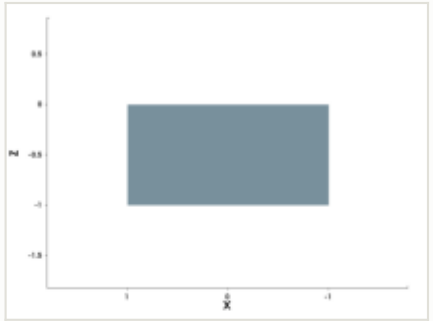


mask for this step

no mask for this step


steps by process area



materials deposited (g)



gases emitted (g)

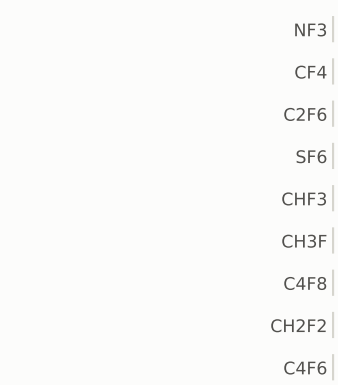


Step #40: Wafer_clean

clean · Wafer_clean

0.169	27	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

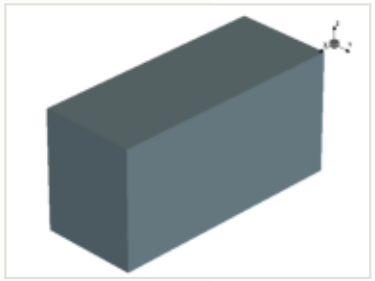






this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead


EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

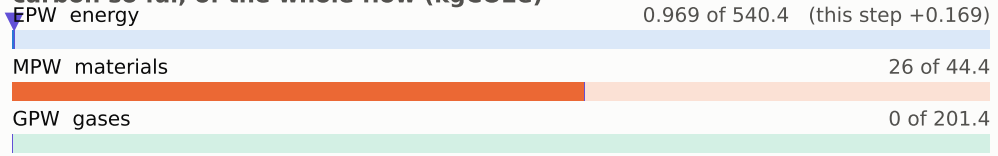


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

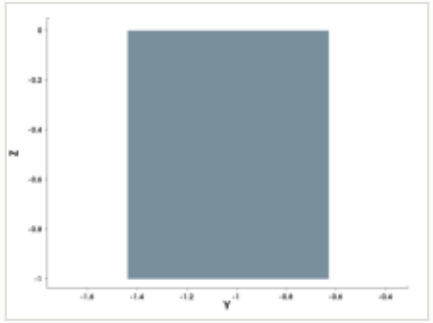

y cut at -1.035 µm

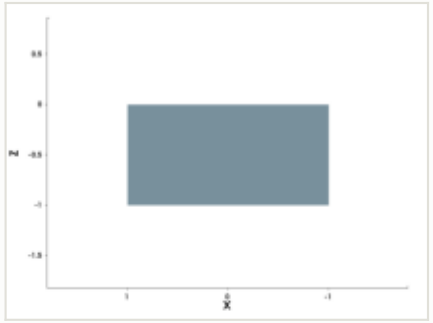

mask for this step

no mask for this step


steps by process area



materials deposited (g)



gases emitted (g)

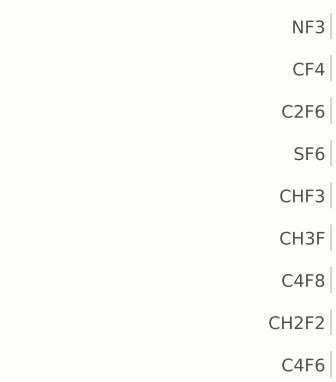


Step #60: Wafer_clean

clean · Wafer_clean

0.169	27.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

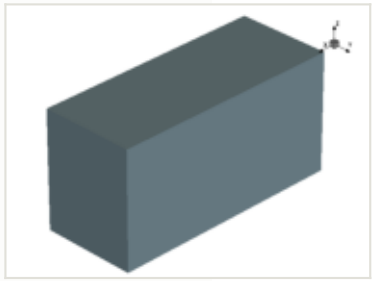


this step


process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

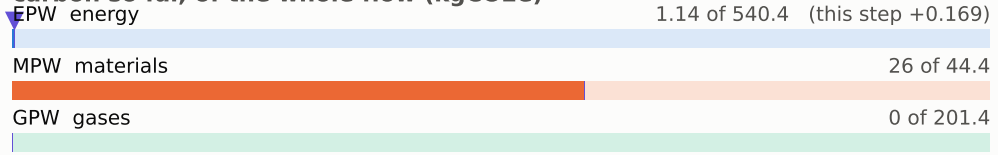


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

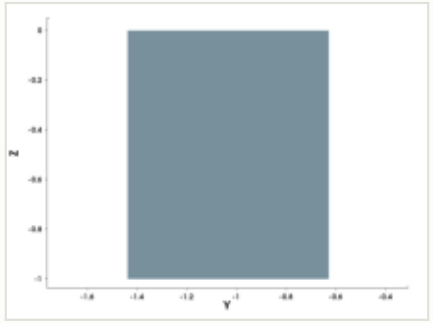

y cut at -1.035 µm

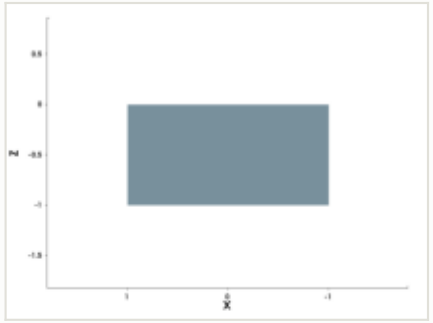

mask for this step

no mask for this step

steps by process area



materials deposited (g)



gases emitted (g)


Step #70: Diffusion

depo_isotropic · Diffusion

0.801	27.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

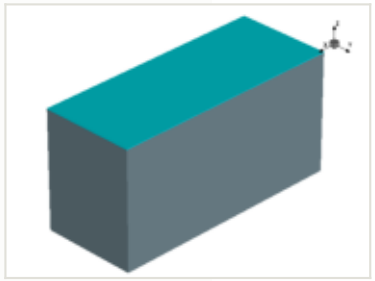






this step

process area	Diffusion
material	—
thickness	0.0064 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

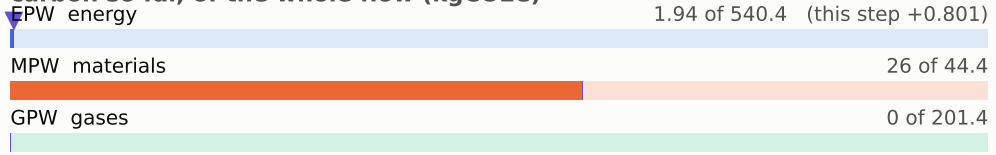


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

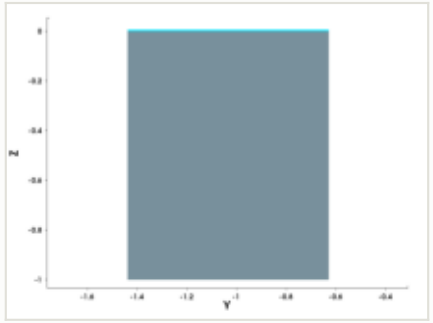


y cut at -1.035 µm

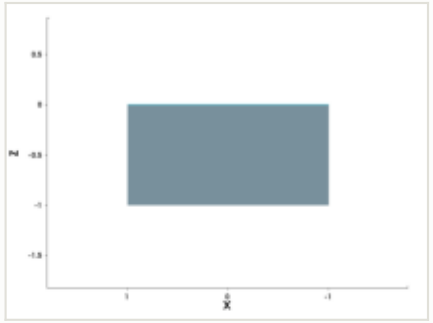


mask for this step

no mask for this step


steps by process area

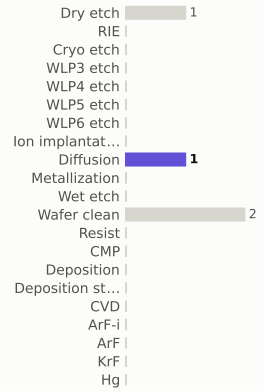

materials deposited (g)



gases emitted (g)

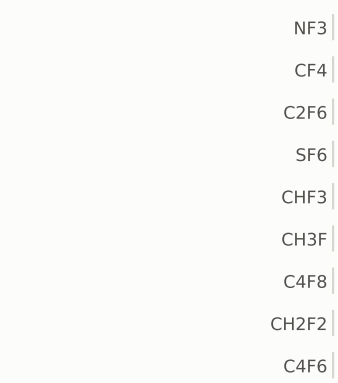


Step #80: CVD

depo_isotropic · CVD

1.31	29.2	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

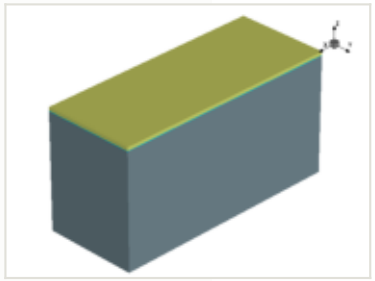






this step


process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

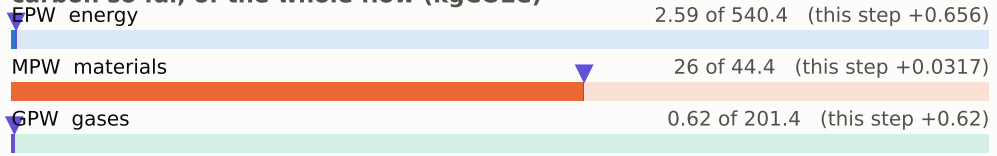


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

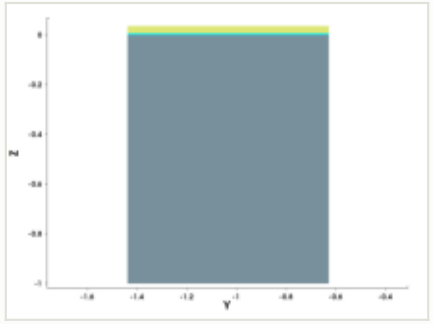


y cut at -1.035 µm

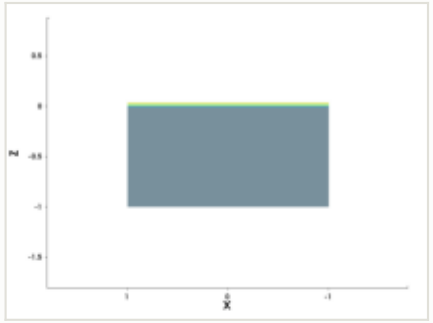

mask for this step

no mask for this step


steps by process area

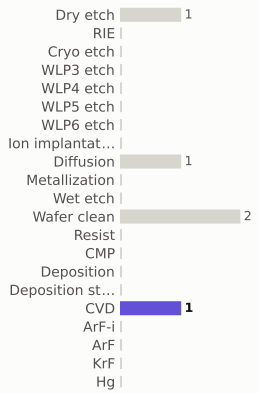

materials deposited (g)



gases emitted (g)




Step #90: KrF


litho_patterning · KrF

0.199	29.4	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

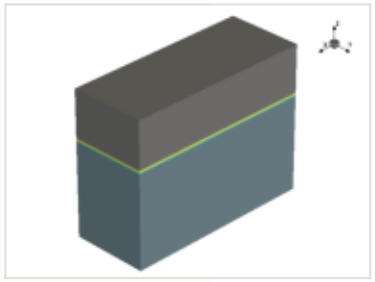

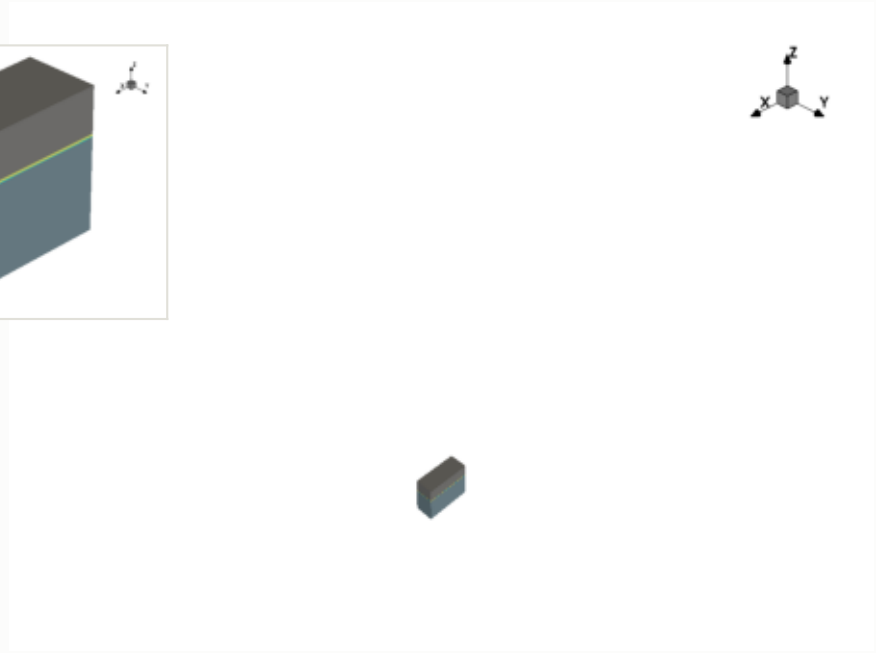


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

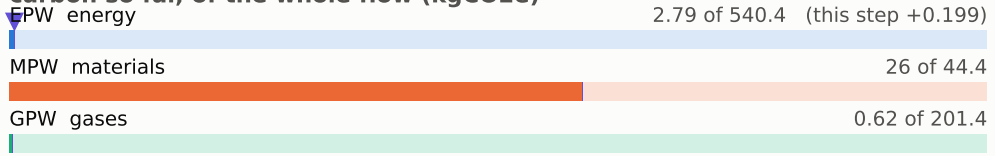


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

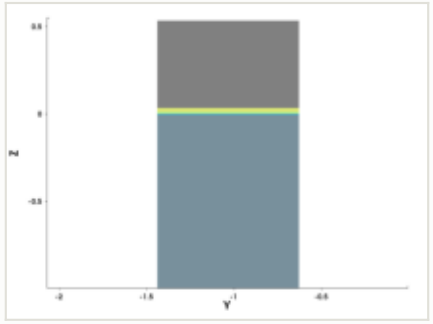


y cut at -1.035 µm

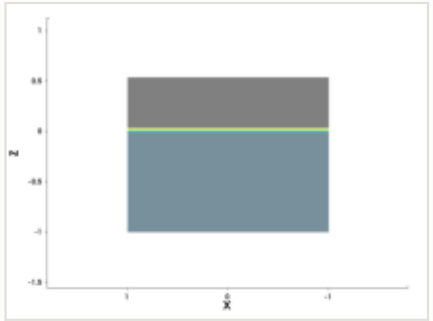

mask: layer 1:0, positive (OASIS)




steps by process area

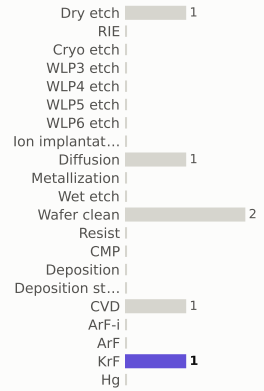

materials deposited (g)



gases emitted (g)

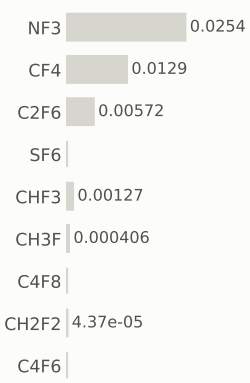


Step #100: RIE

etch_anisotropic · RIE

1.04	30.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

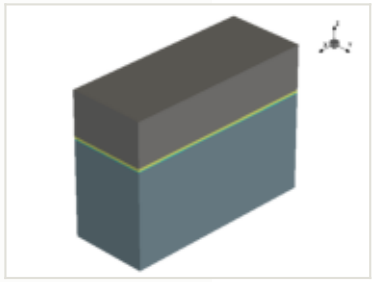

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 3.59 of 540.4 (this step +0.801)


MPW materials — 26.1 of 44.4 (this step +0.0571)

GPW gases — 0.808 of 201.4 (this step +0.187)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

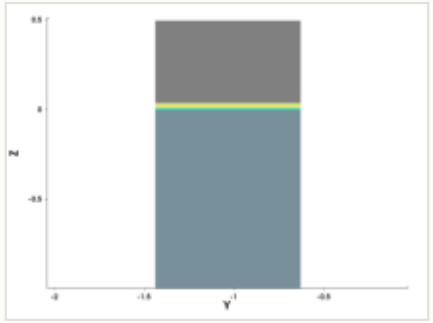


y cut at -1.035 µm

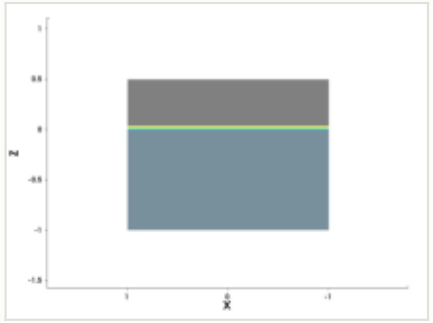

mask for this step

no mask for this step


steps by process area

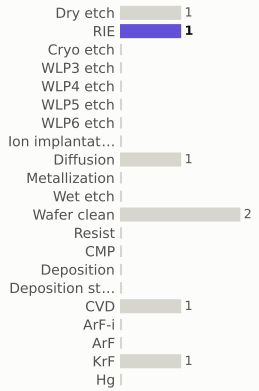

materials deposited (g)



gases emitted (g)

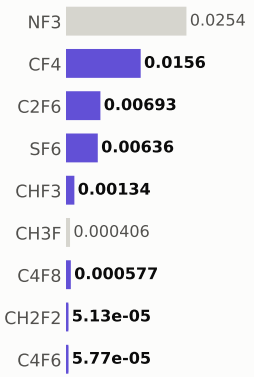


Step #110: RIE


etch_anisotropic · RIE

1.04	31.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

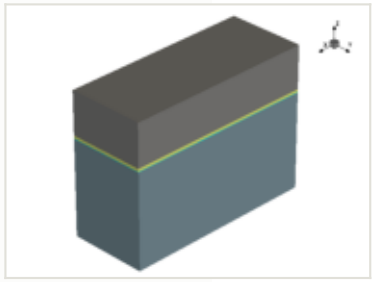

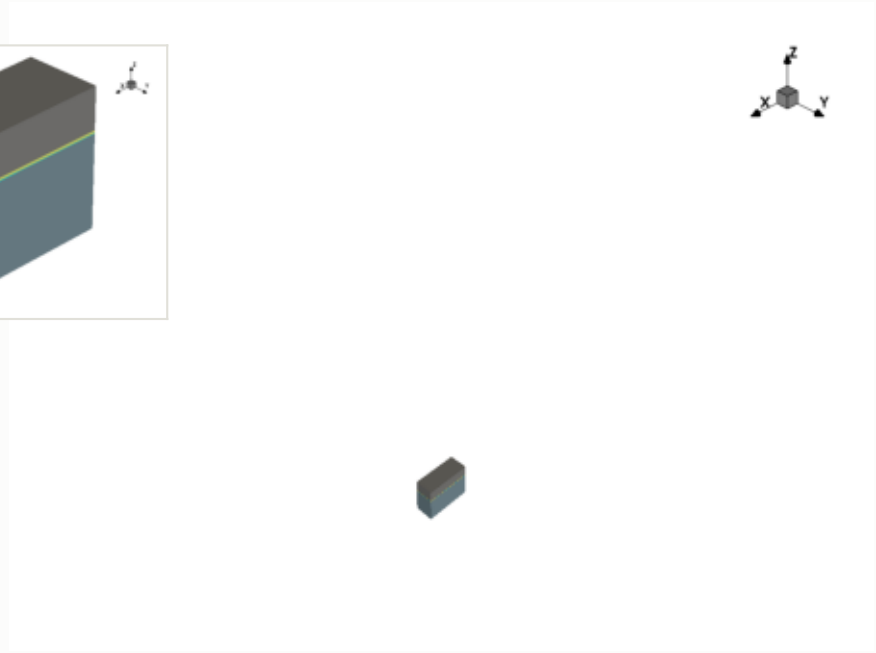


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

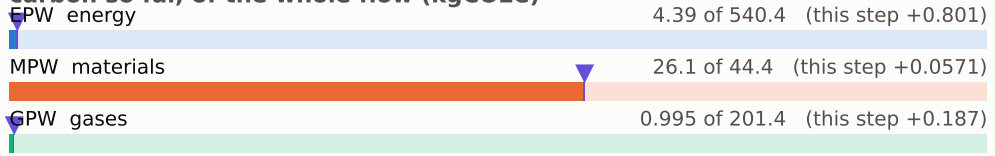


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

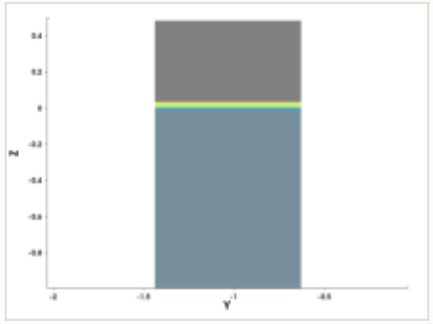


y cut at -1.035 µm

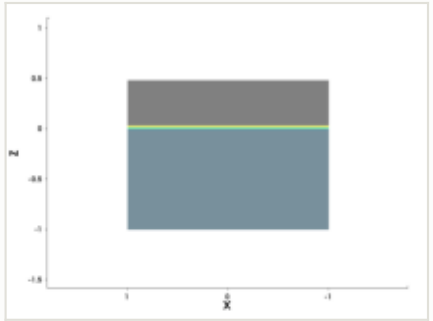


mask for this step

no mask for this step


steps by process area

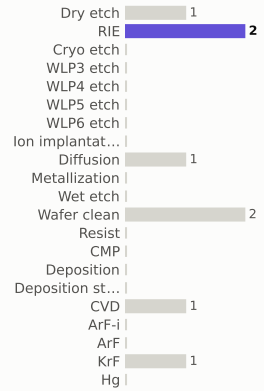

materials deposited (g)



gases emitted (g)

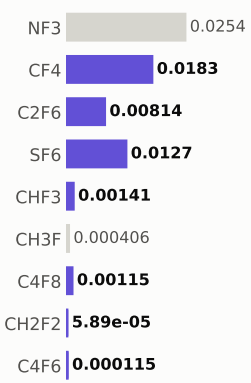


Step #120: RIE

etch_anisotropic · RIE

1.04	32.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

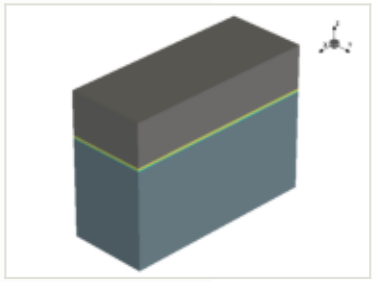






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

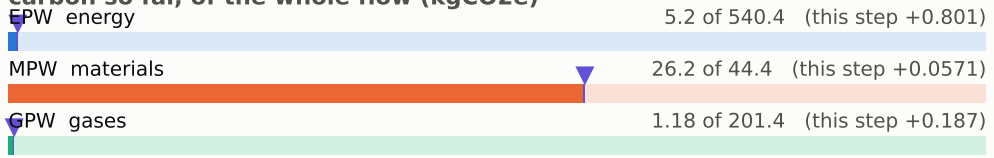


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

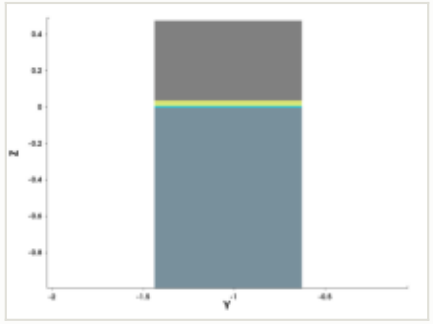


y cut at -1.035 µm

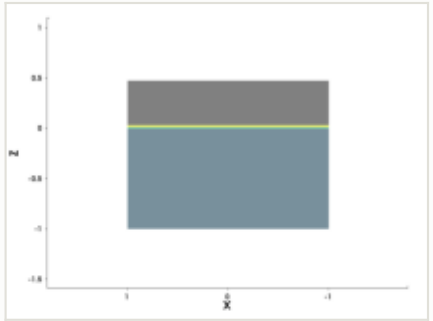


mask for this step

no mask for this step


steps by process area

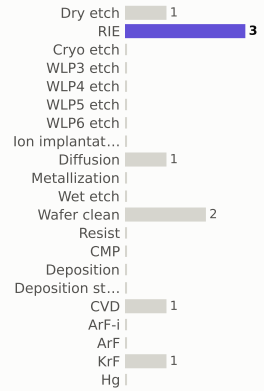

materials deposited (g)



gases emitted (g)




Step #130: Dry_etch


etch_strip · Dry_etch

0.801	33.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

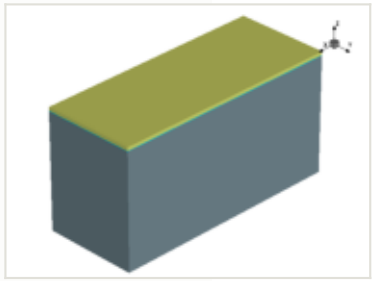

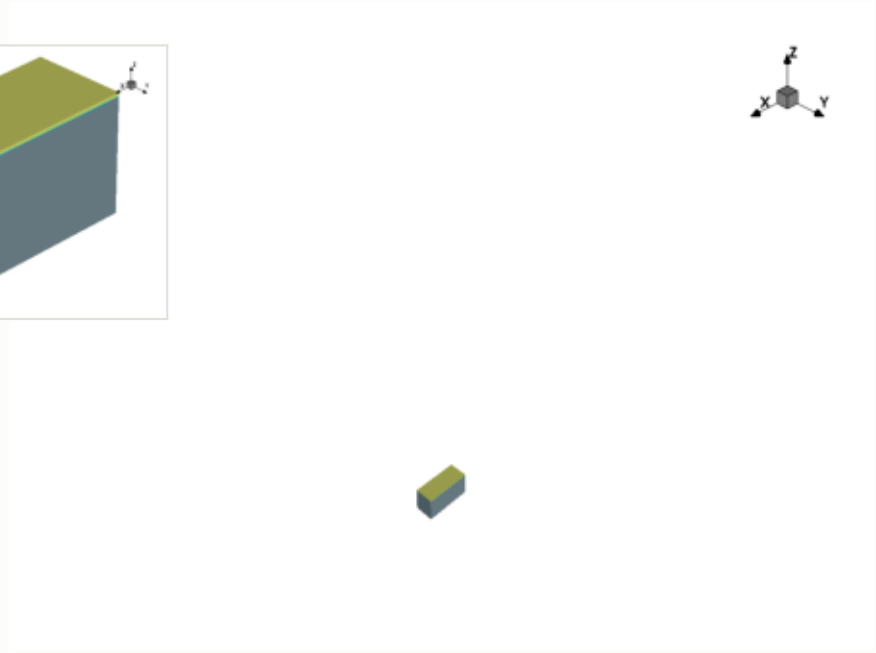


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

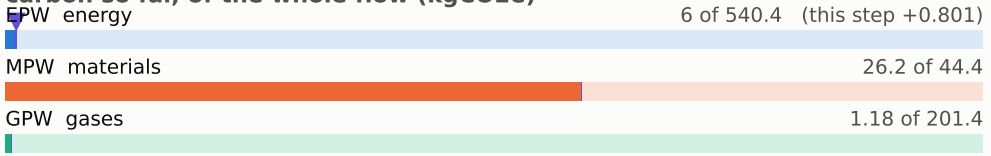


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

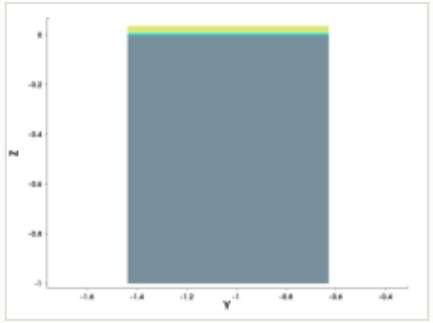


y cut at -1.035 µm

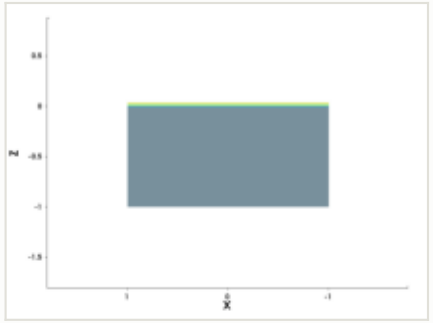


mask for this step

no mask for this step


steps by process area

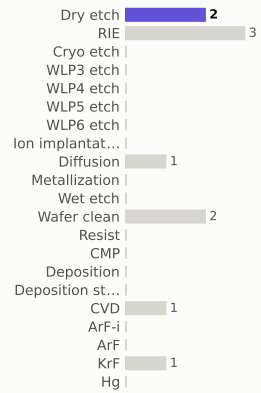

materials deposited (g)



gases emitted (g)

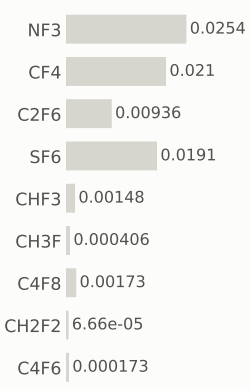


Step #140: Wafer_clean

clean · Wafer_clean

0.169	33.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

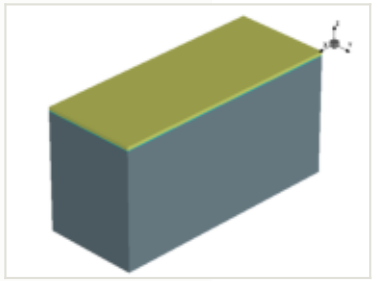






x cut at 0.000 µm

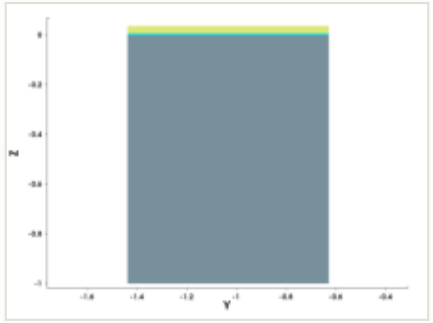

y cut at -1.035 µm

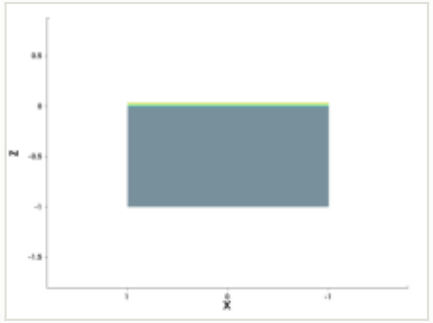

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

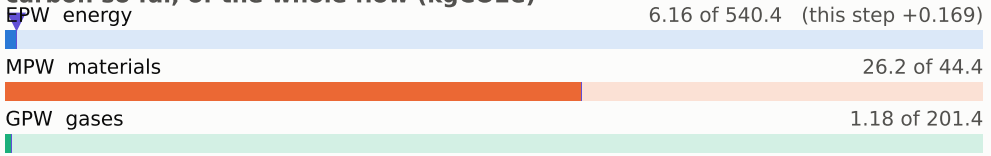


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

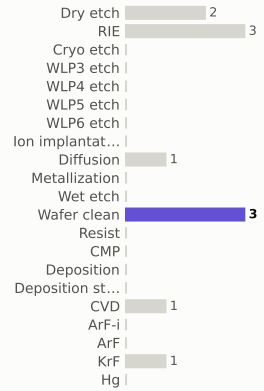

materials deposited (g)



gases emitted (g)




Step #150: Diffusion


depo_isotropic · Diffusion

0.801	34.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

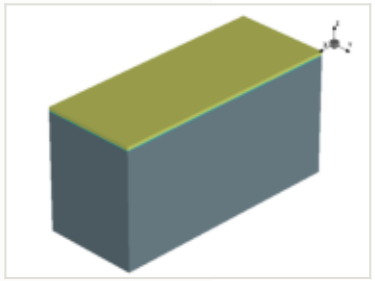

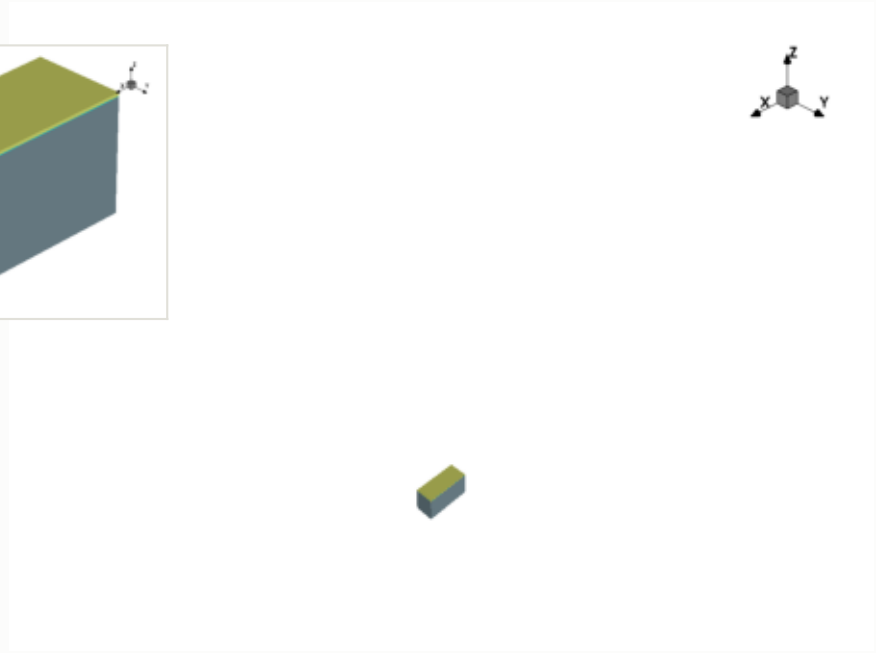


this step

process area	Diffusion
material	—
thickness	0.042 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

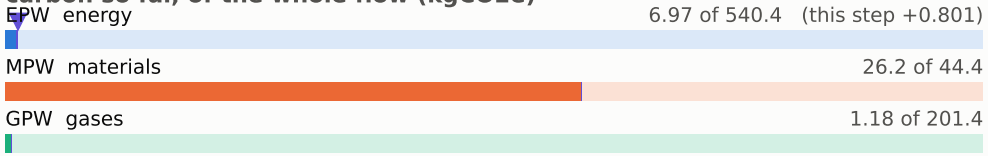


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

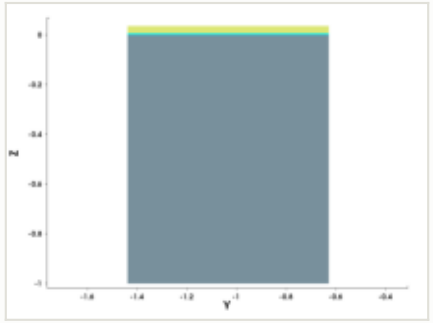


y cut at -1.035 µm

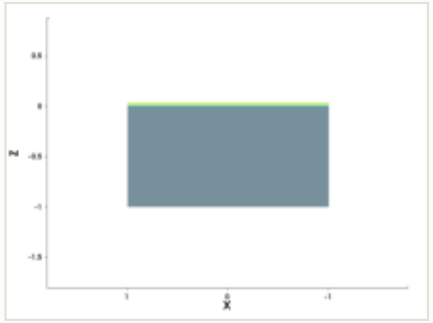


mask for this step

no mask for this step


steps by process area

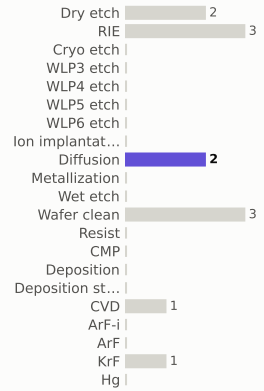

materials deposited (g)



gases emitted (g)

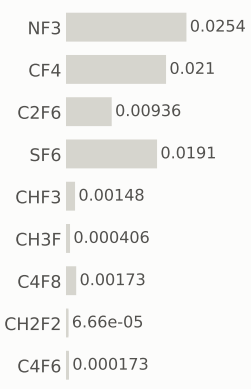


Step #160: Wet_etch

etch_isotropic · Wet_etch

0.169	34.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

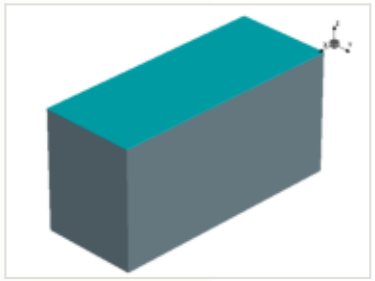




this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

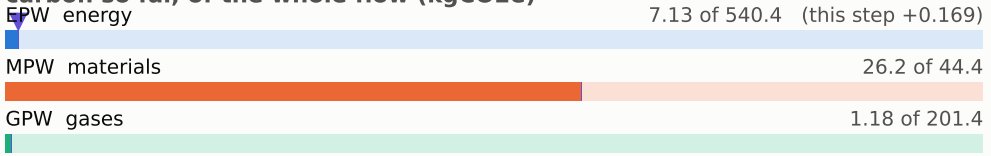


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

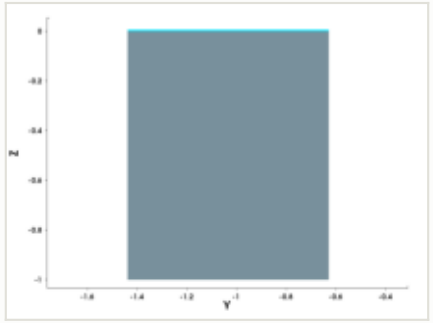


y cut at -1.035 µm

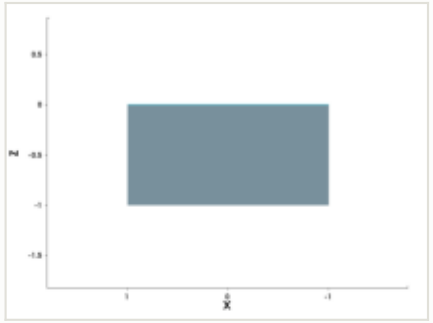

mask for this step

no mask for this step


steps by process area

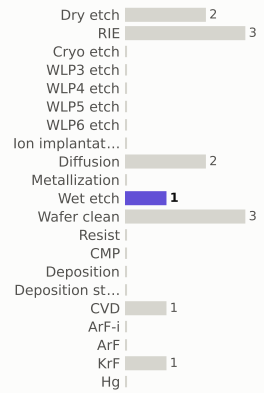

materials deposited (g)



gases emitted (g)

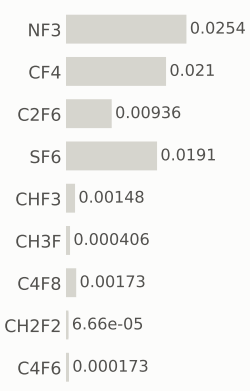


Step #170: Wafer_clean

clean · Wafer_clean

0.169	34.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

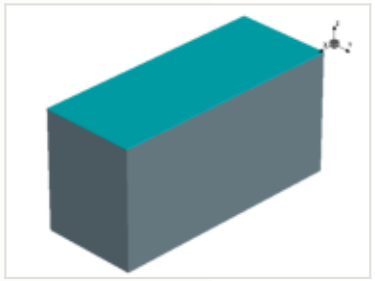




this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

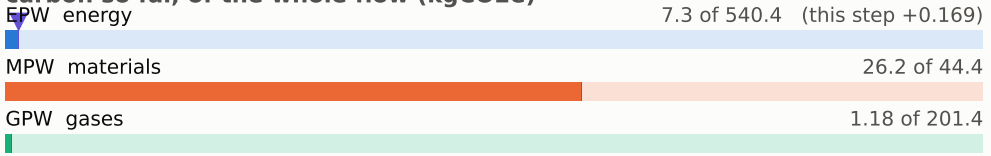


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

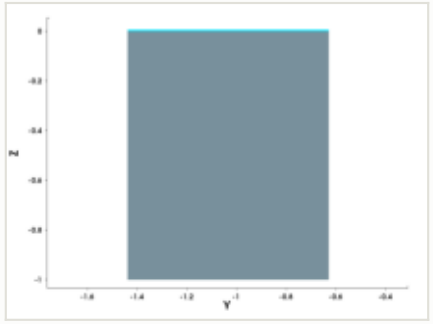


y cut at -1.035 µm

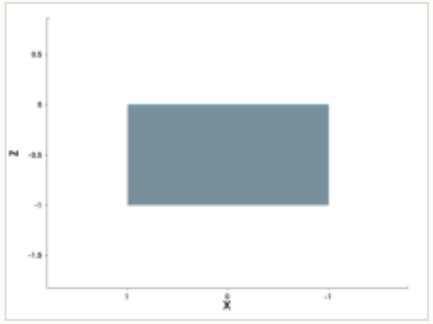

mask for this step

no mask for this step


steps by process area

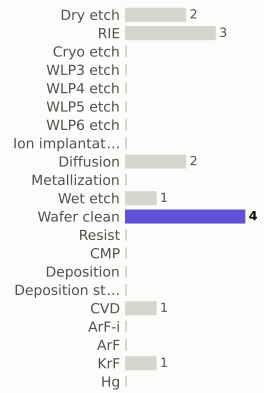

materials deposited (g)



gases emitted (g)

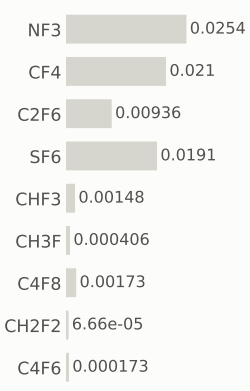


Step #180: Diffusion


implant_ellipsoid · Diffusion

0.801	35.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

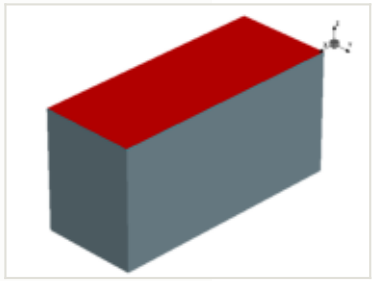

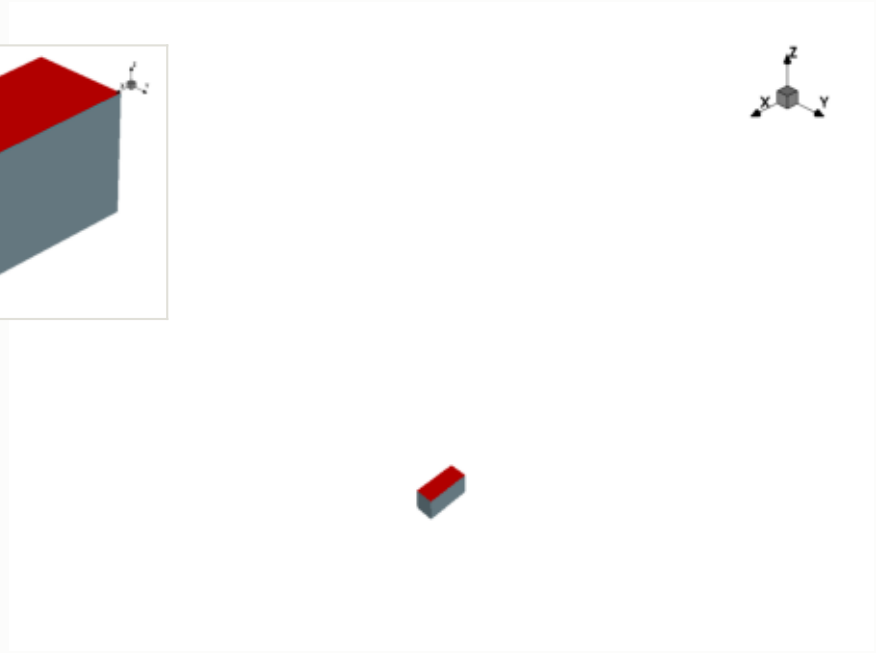


this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

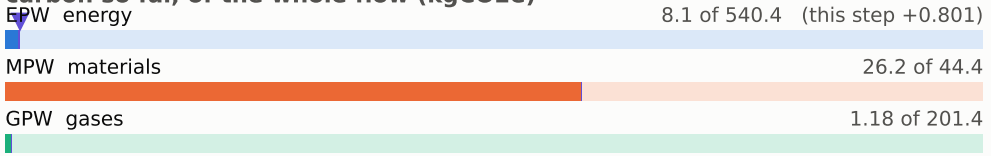


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

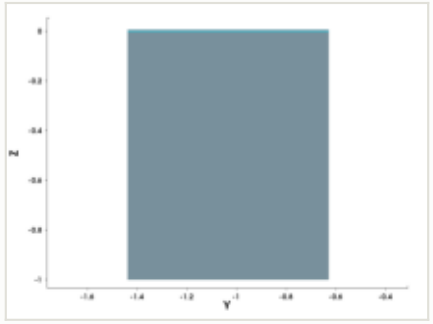


y cut at -1.035 µm

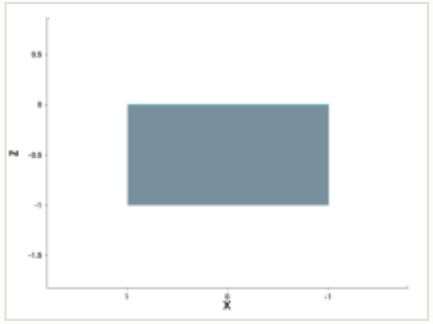

mask for this step

no mask for this step


steps by process area

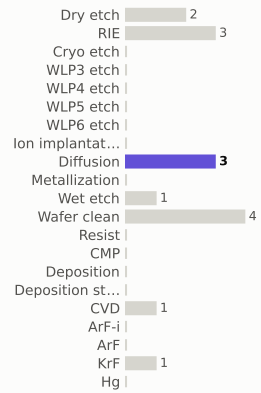

materials deposited (g)



gases emitted (g)




Step #190: Diffusion

anneal · Diffusion

0.801	36.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

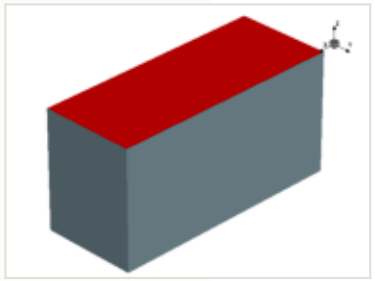






x cut at 0.000 µm

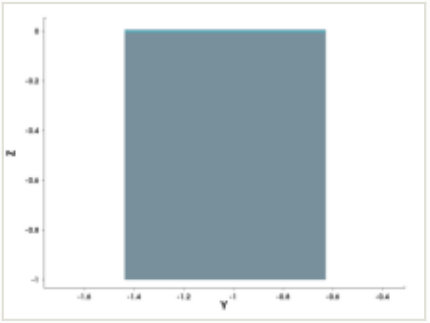

y cut at -1.035 µm

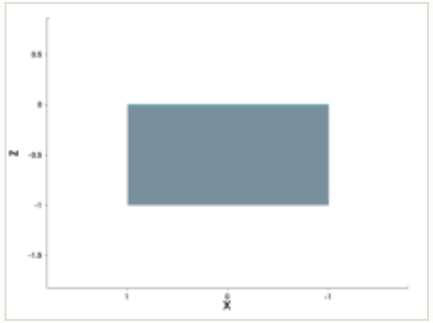

mask for this step

no mask for this step


this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp


carbon so far, of the whole flow (kgCO2e)

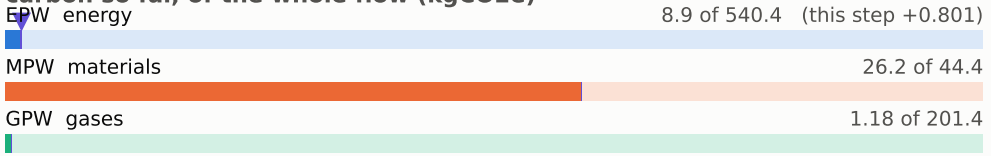

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

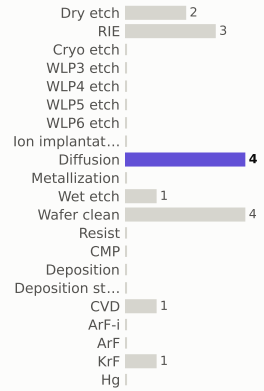

materials deposited (g)



gases emitted (g)




Step #200: CVD

depo_isotropic · CVD

1.31	37.6	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

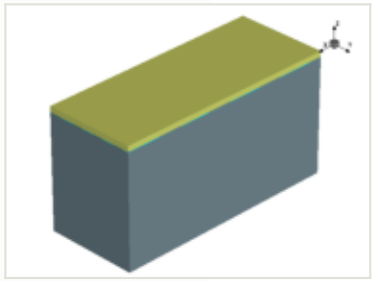






x cut at 0.000 µm

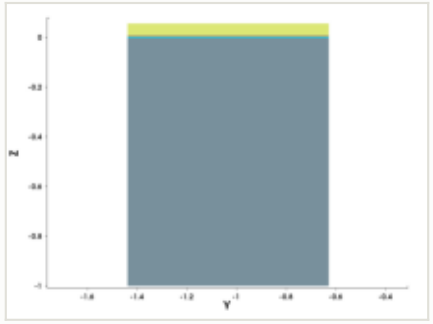

y cut at -1.035 µm

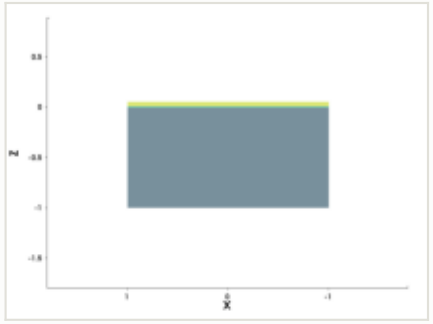

mask for this step


no mask for this step

this step

process area	CVD
material	—
thickness	0.05 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

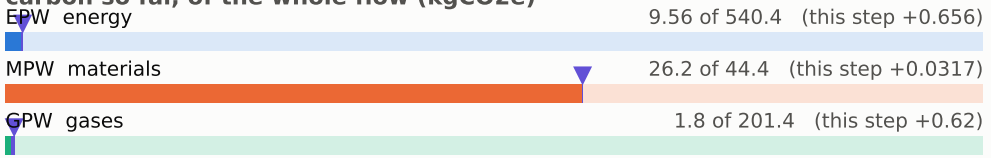


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

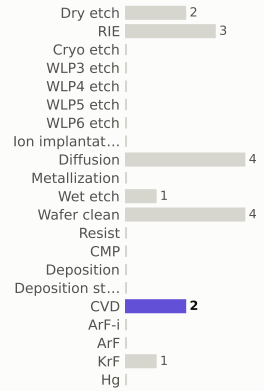

materials deposited (g)

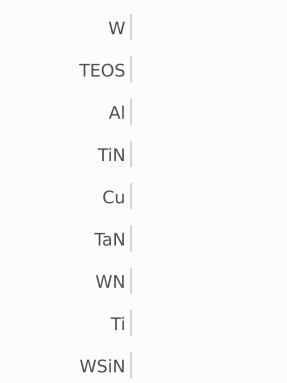

gases emitted (g)

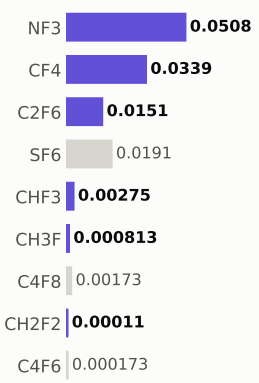


Step #220: Hg

litho_patterning · Hg


0.199	37.8	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

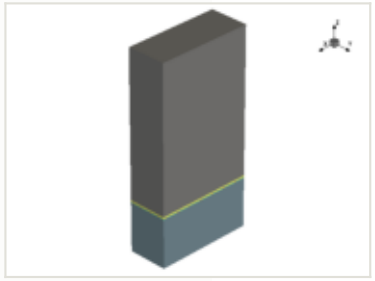






this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

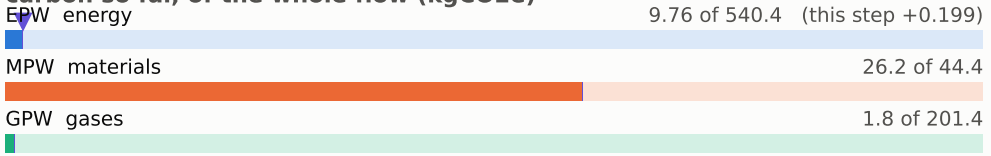


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

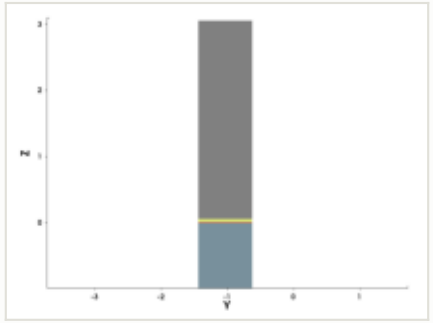


y cut at -1.035 µm

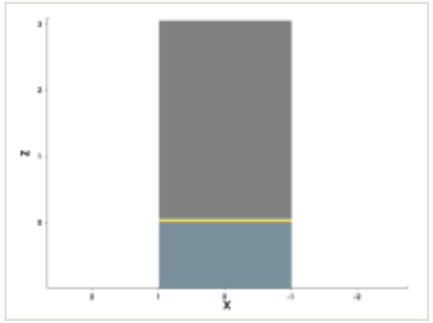

mask: layer 2:0, positive (OASIS)




steps by process area

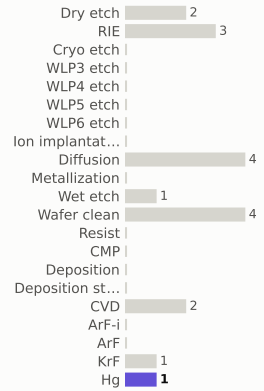

materials deposited (g)



gases emitted (g)

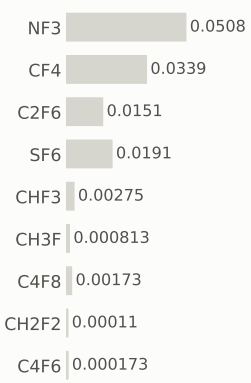


Step #230: Ion_implantation

implant_ellipsoid · Ion_implantation


0.801	38.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

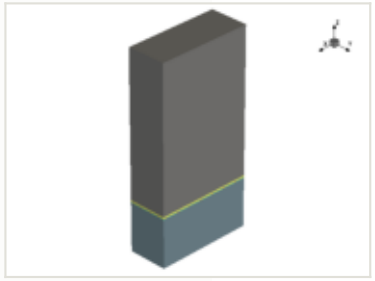






x cut at 0.000 µm

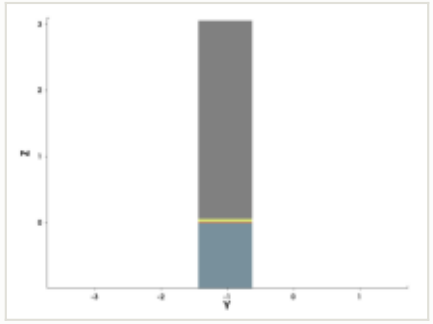

y cut at -1.035 µm

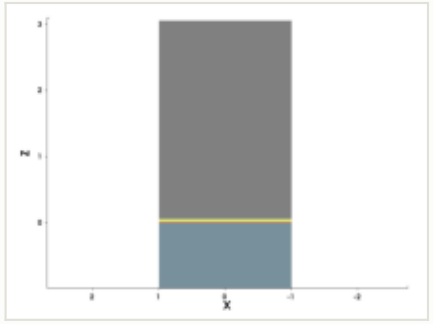

mask for this step

no mask for this step


this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead


EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

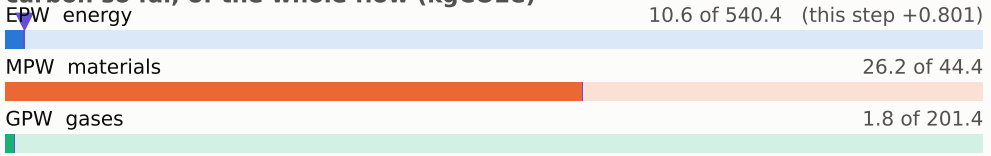


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

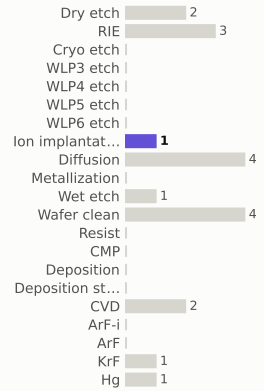

materials deposited (g)



gases emitted (g)

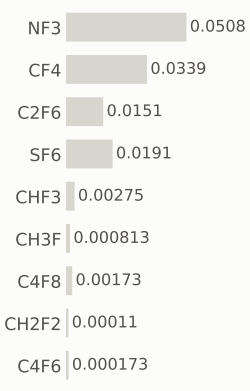


Step #240: Ion_implantation

implant_ellipsoid · Ion_implantation


0.801	39.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

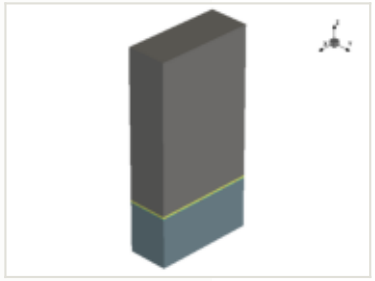






x cut at 0.000 µm

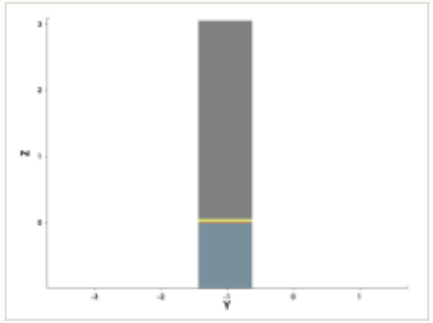

y cut at -1.035 µm

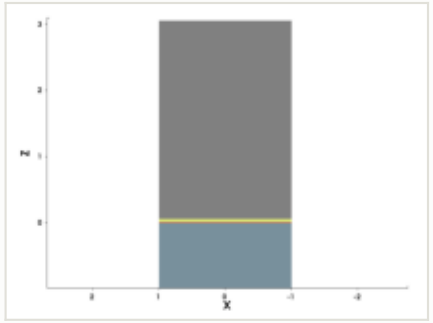

mask for this step

no mask for this step


this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead


EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

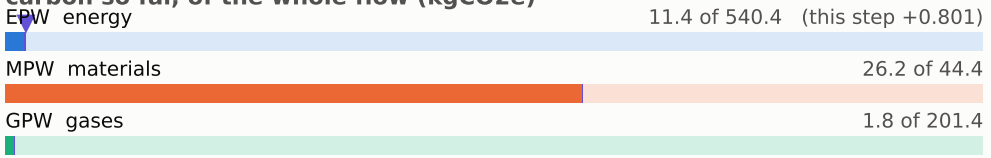


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

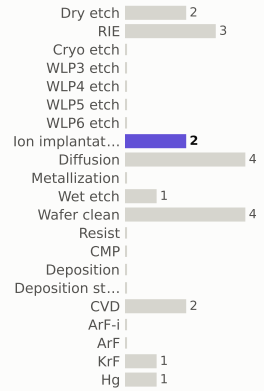

materials deposited (g)



gases emitted (g)

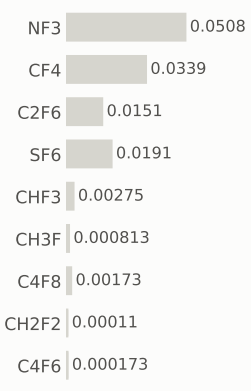


Step #250: Dry_etch

etch_strip · Dry_etch

0.801	40.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

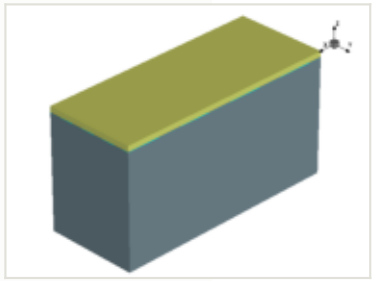


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

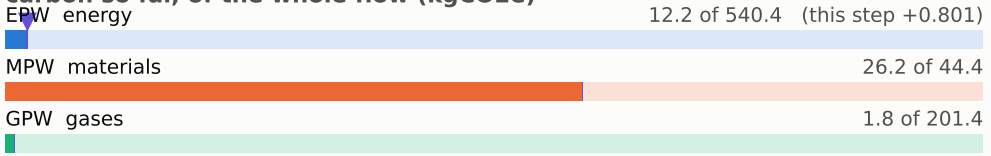


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

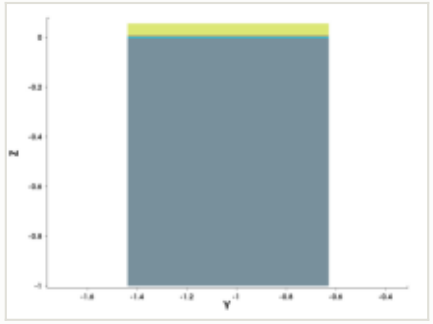


y cut at -1.035 µm

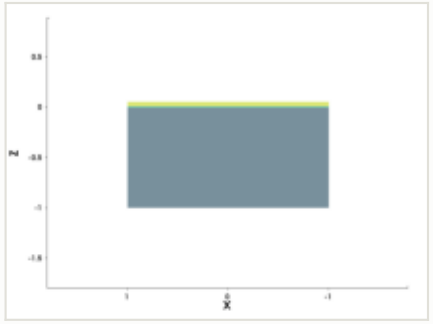


mask for this step

no mask for this step


steps by process area

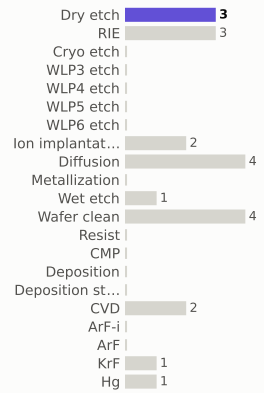

materials deposited (g)



gases emitted (g)




Step #260: Wafer_clean

clean · Wafer_clean

0.169	40.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

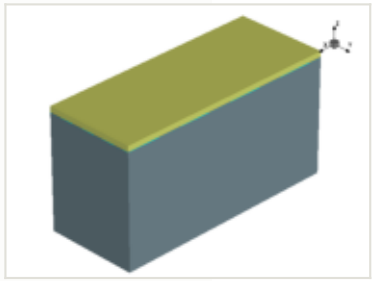






x cut at 0.000 µm

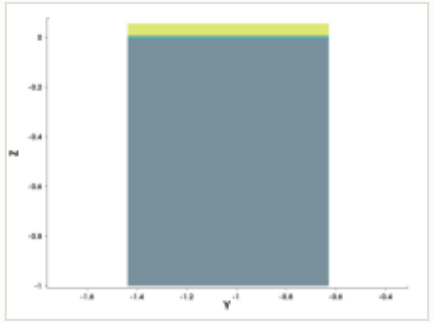

y cut at -1.035 µm

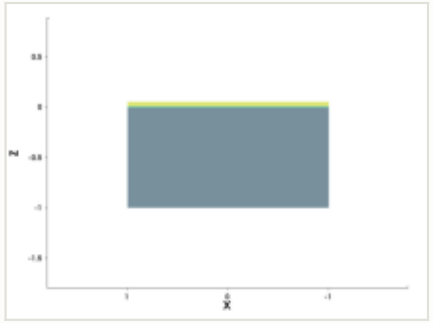

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

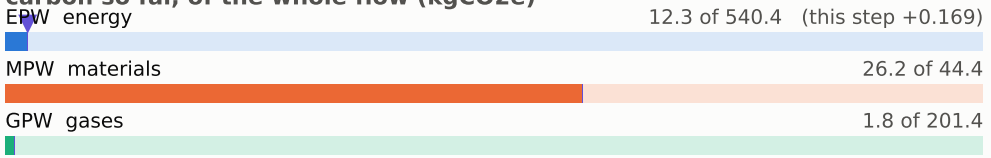


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

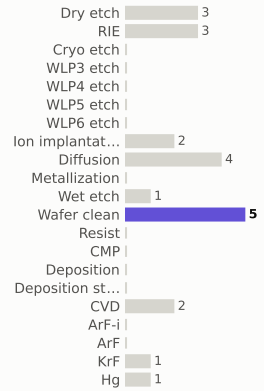

materials deposited (g)



gases emitted (g)

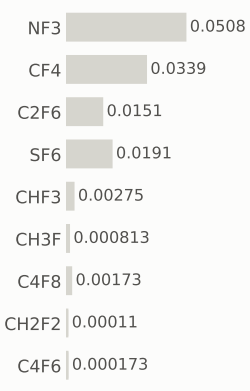


Step #270: Hg

litho_patterning · Hg

0.199	40.6	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

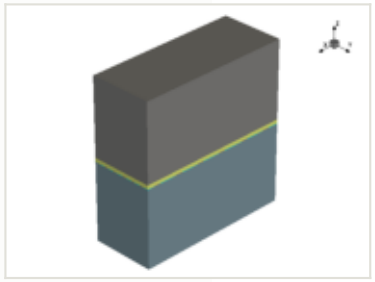






this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

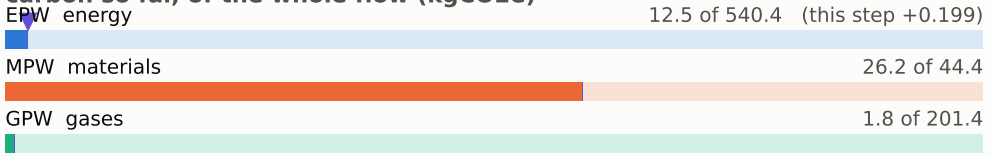


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

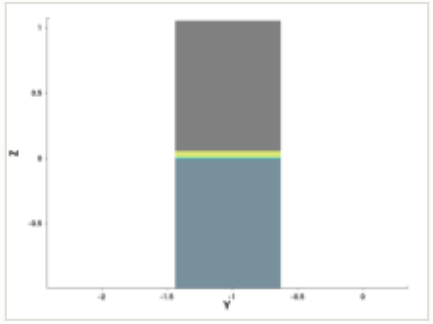


y cut at -1.035 µm

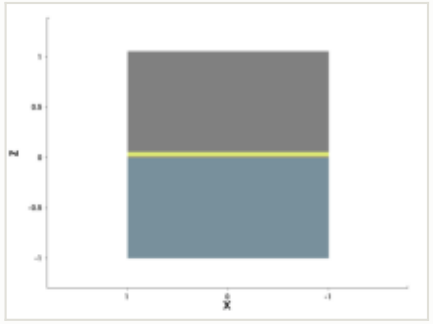


mask: layer 3:0, positive (OASIS)




steps by process area

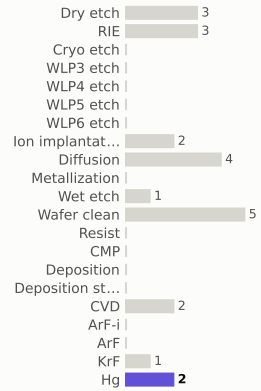

materials deposited (g)



gases emitted (g)

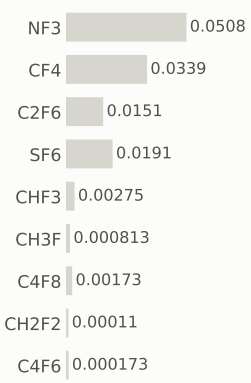


Step #280: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	41.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

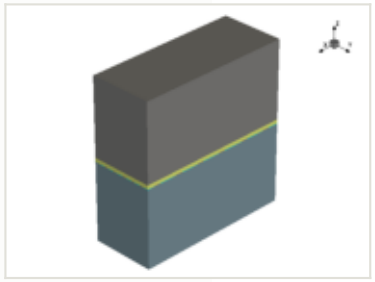






x cut at 0.000 µm

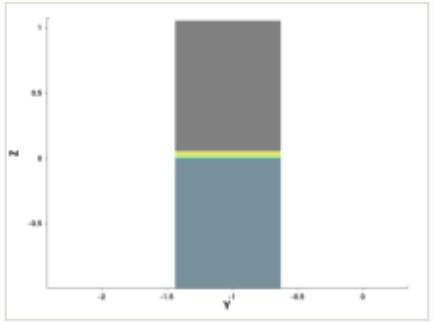

y cut at -1.035 µm

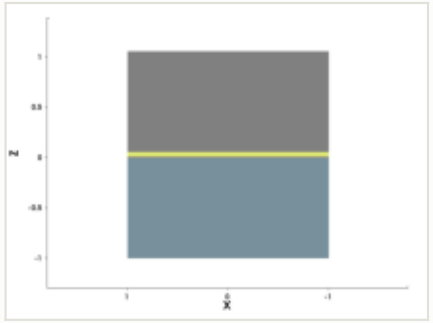

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GPW	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

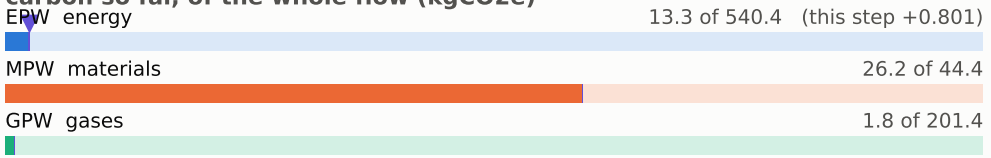


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

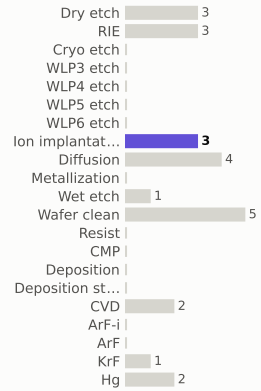

materials deposited (g)



gases emitted (g)

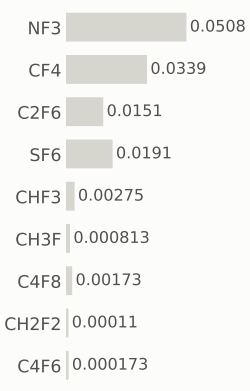


Step #290: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	42.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

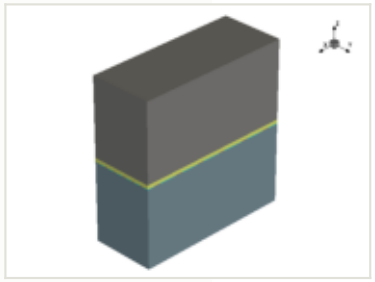






x cut at 0.000 µm

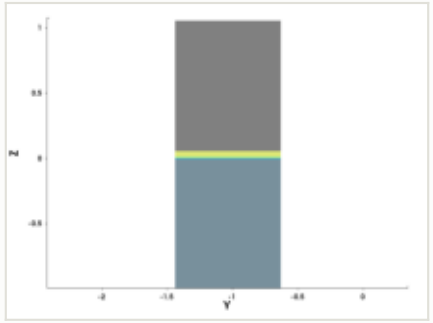

y cut at -1.035 µm

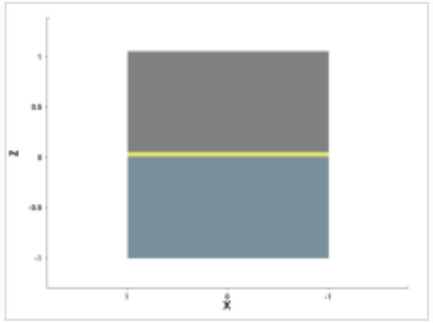

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

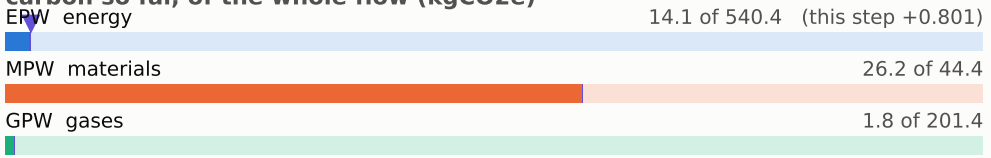


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

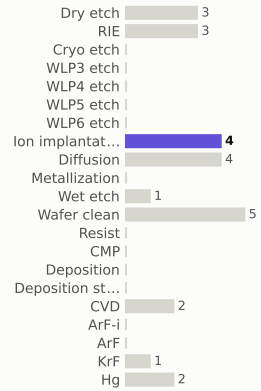

materials deposited (g)



gases emitted (g)

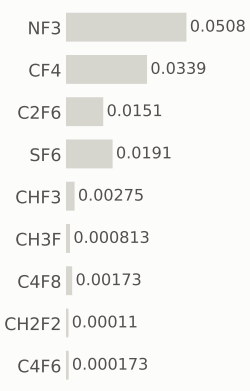


Step #300: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	43	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

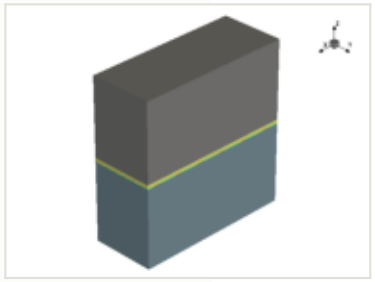


this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

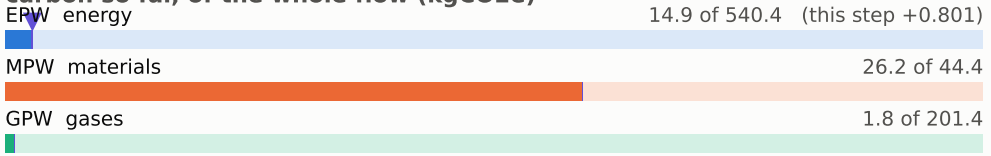


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

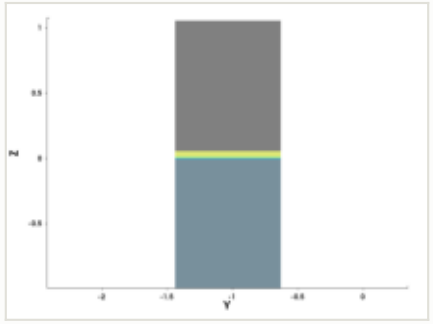


y cut at -1.035 µm

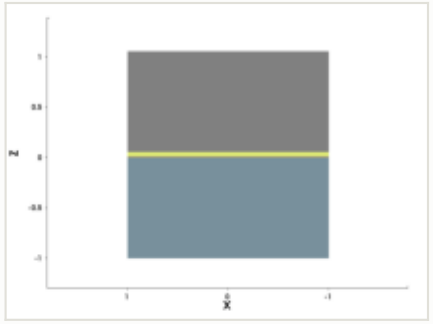

mask for this step

no mask for this step


steps by process area

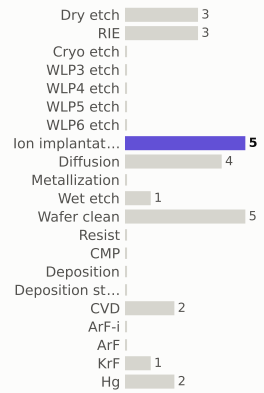

materials deposited (g)



gases emitted (g)

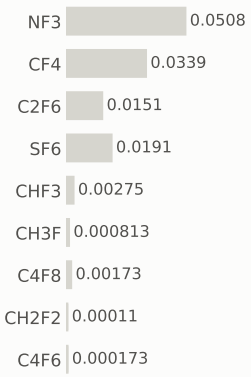


Step #310: Dry_etch


etch_strip · Dry_etch

0.801	43.8	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

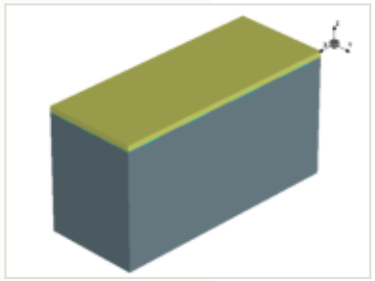


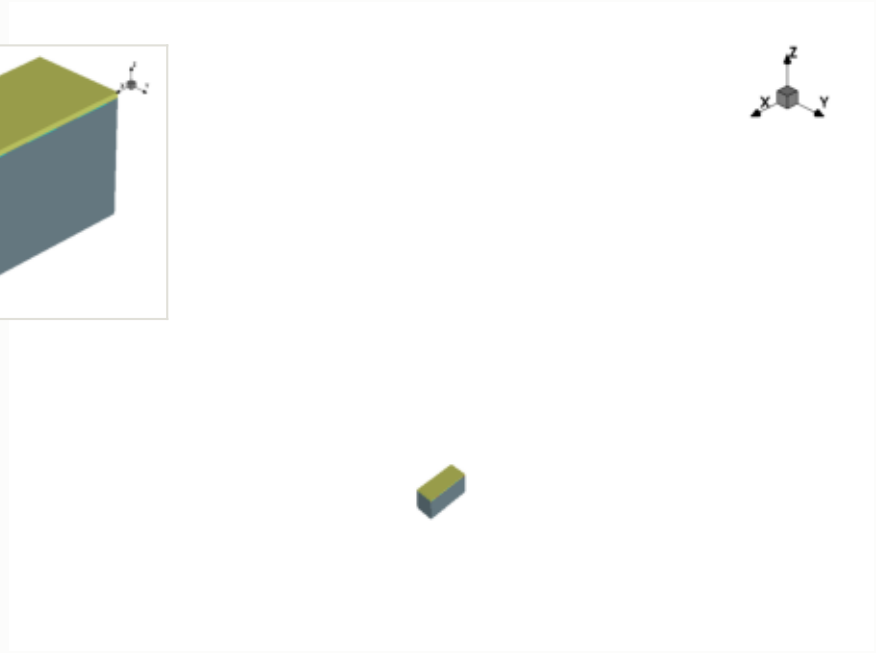

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

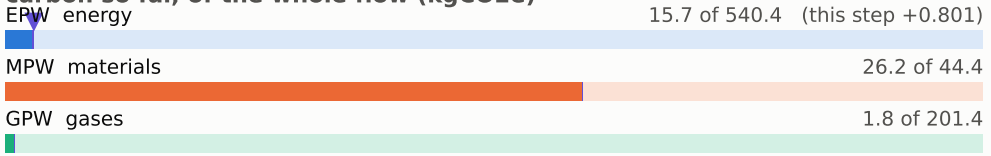


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

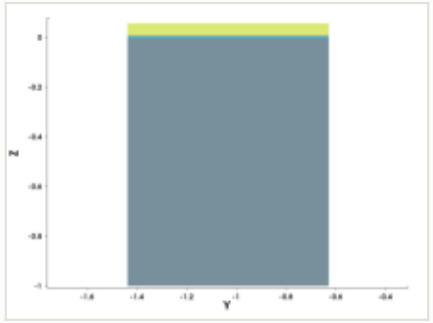


y cut at -1.035 µm

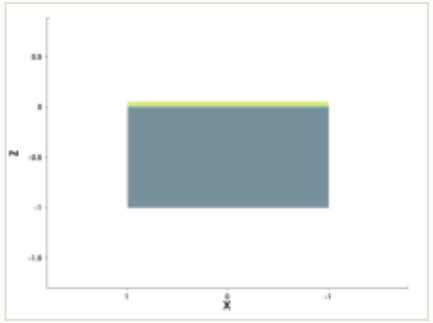

mask for this step

no mask for this step


steps by process area

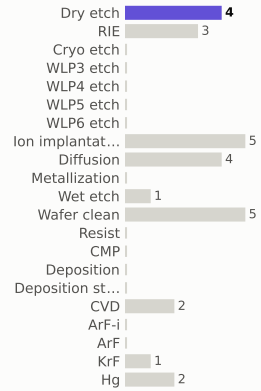

materials deposited (g)



gases emitted (g)

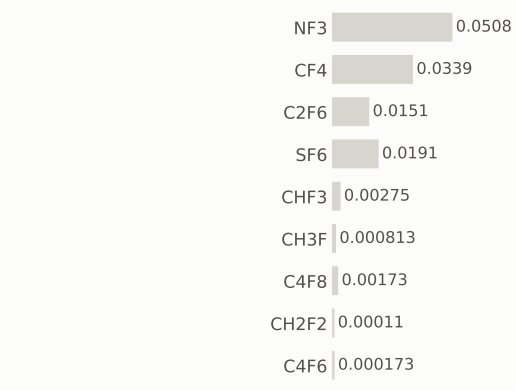


Step #320: Wafer_clean


clean · Wafer_clean

0.169	43.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

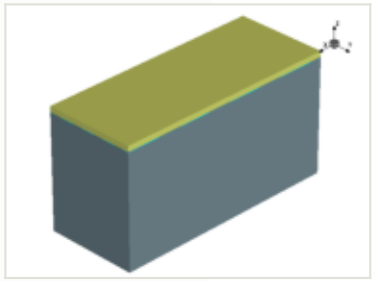


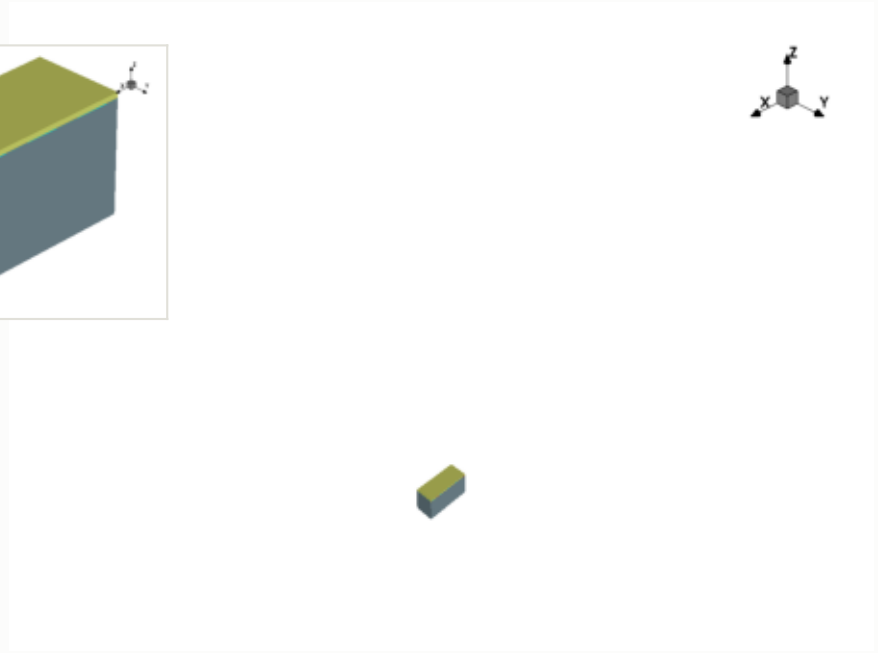

x cut at 0.000 µm

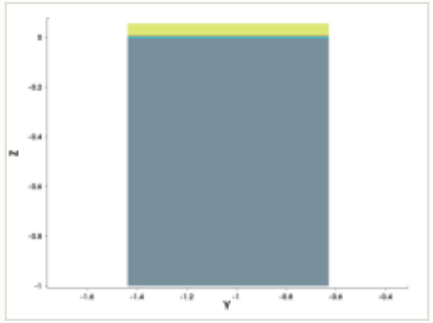

y cut at -1.035 µm

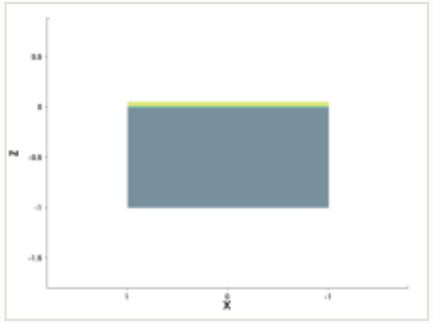

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

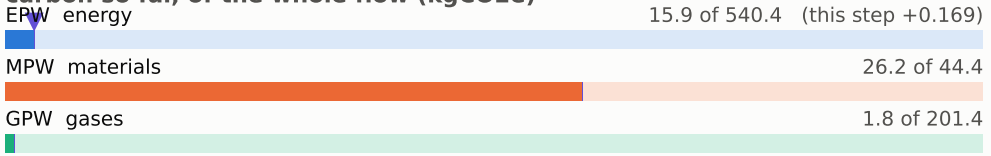

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

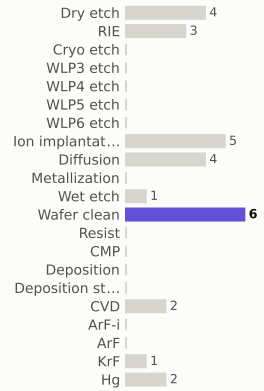

materials deposited (g)



gases emitted (g)

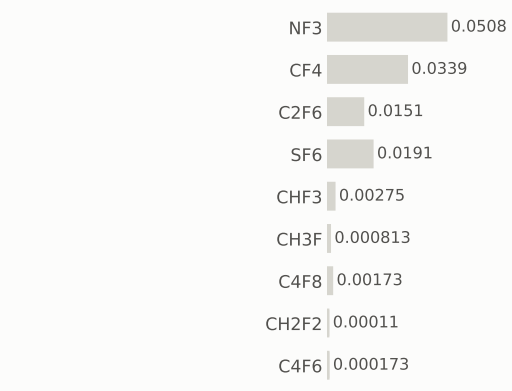


Step #330: Hg


litho_patterning · Hg

0.199	44.1	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

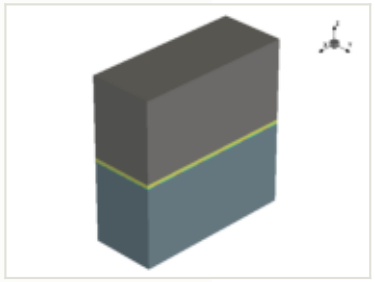

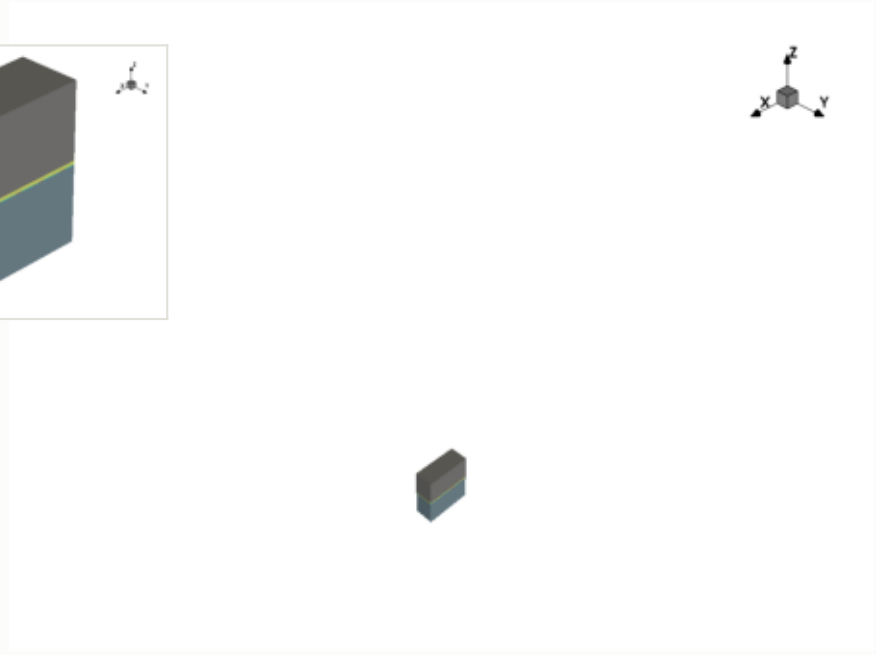


this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

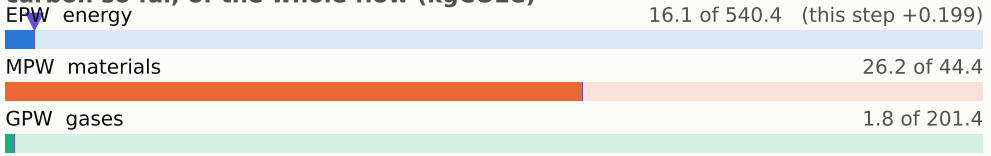


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

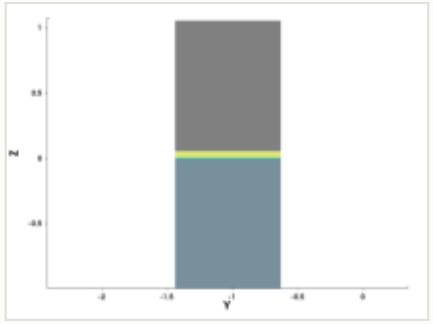


y cut at -1.035 µm

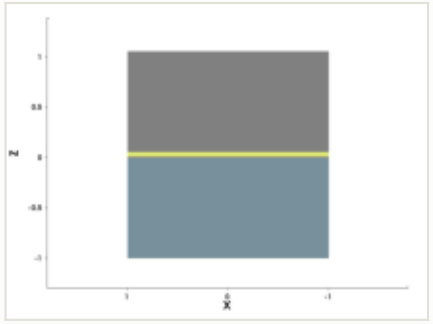

mask: layer 4:0, positive (OASIS)




steps by process area

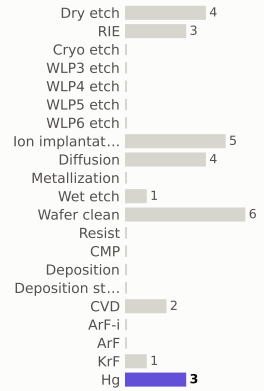

materials deposited (g)



gases emitted (g)

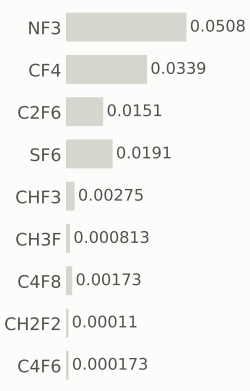


Step #340: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	44.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

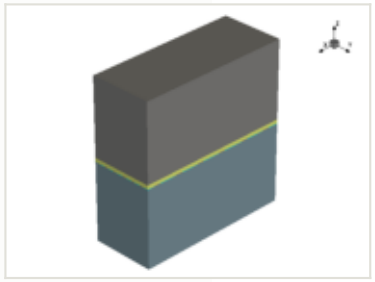


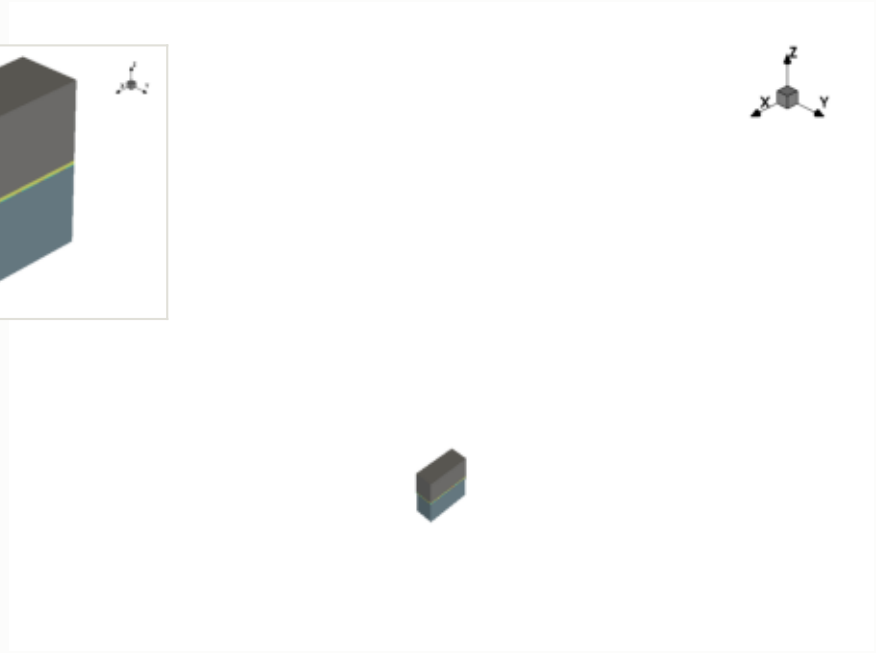

x cut at 0.000 µm

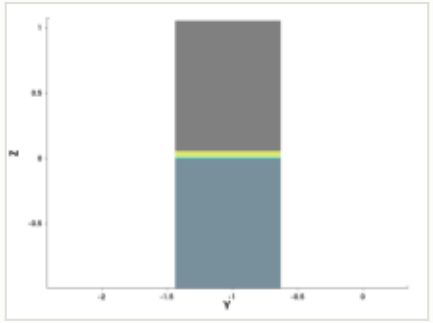

y cut at -1.035 µm

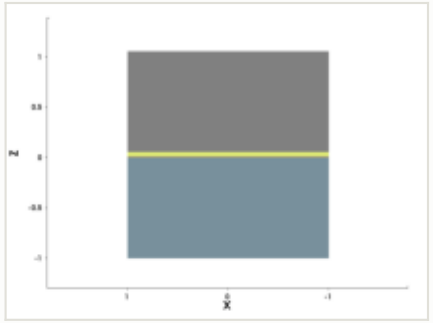

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

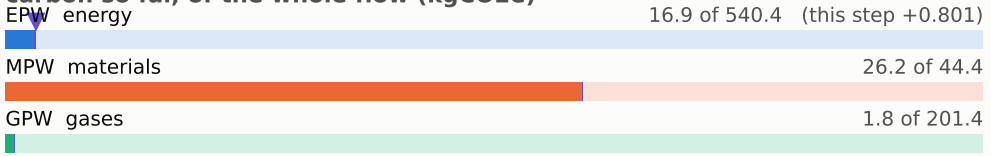


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

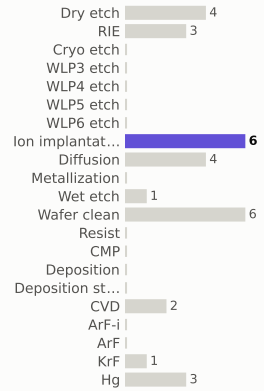

materials deposited (g)



gases emitted (g)

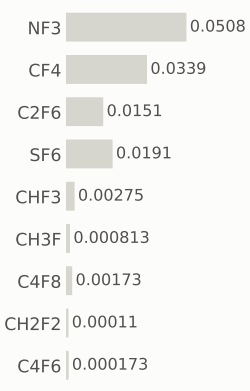


Step #350: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	45.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

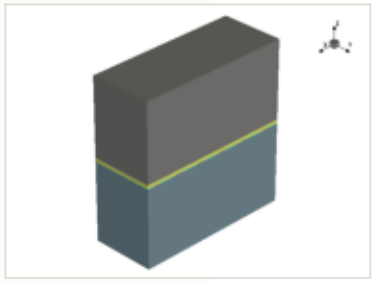


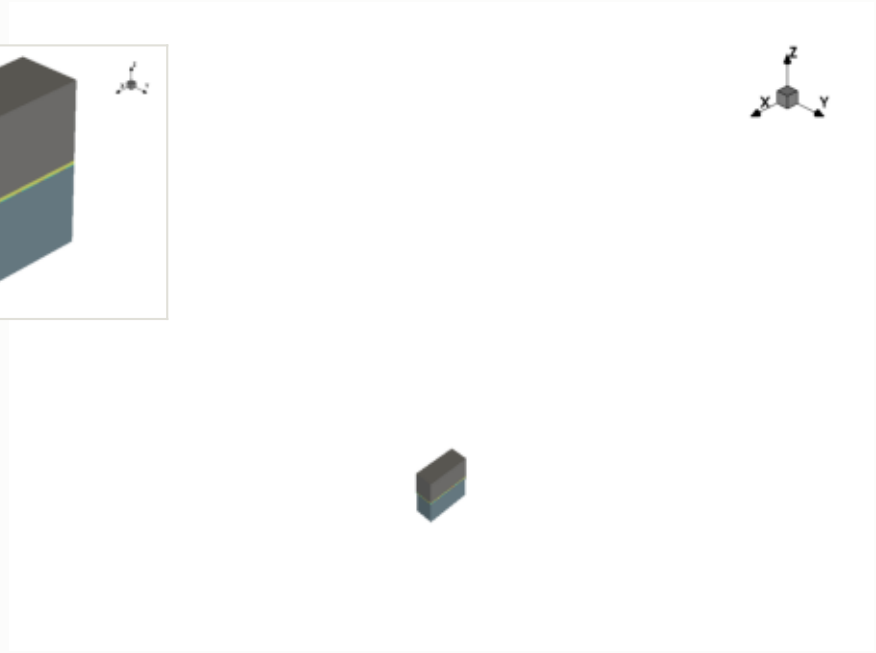

x cut at 0.000 µm

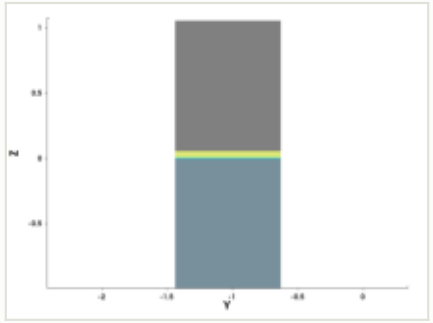

y cut at -1.035 µm

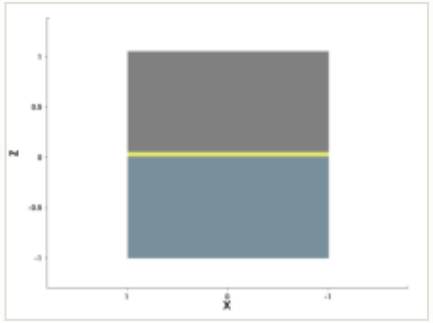

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

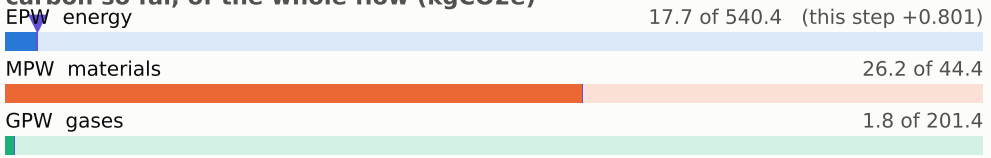

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

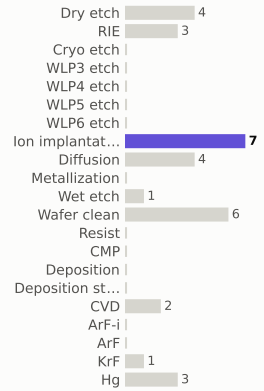

materials deposited (g)



gases emitted (g)

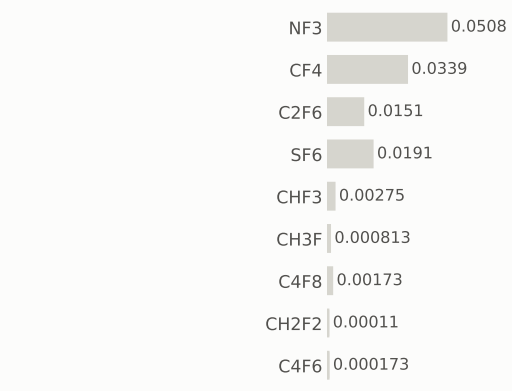


Step #360: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	46.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

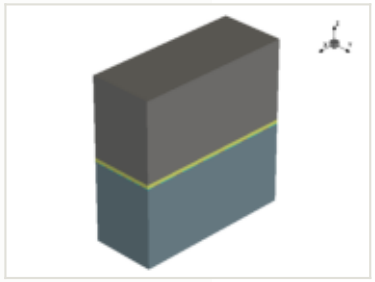


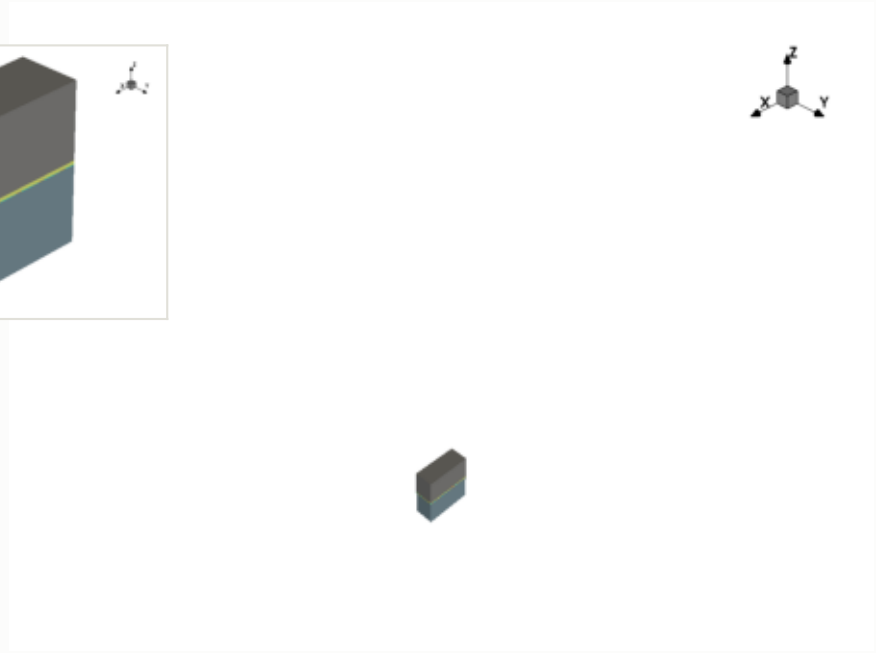

x cut at 0.000 µm

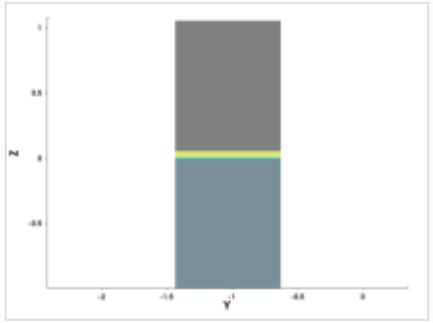

y cut at -1.035 µm

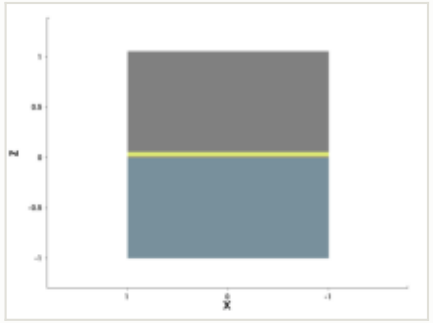

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

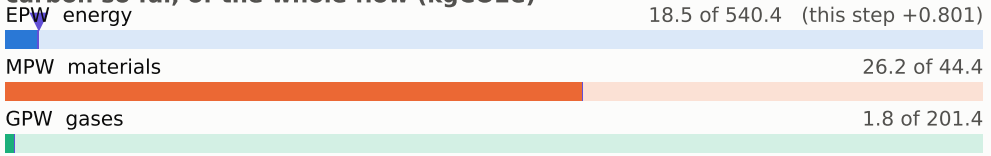

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

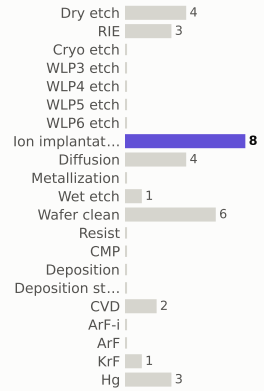

materials deposited (g)



gases emitted (g)

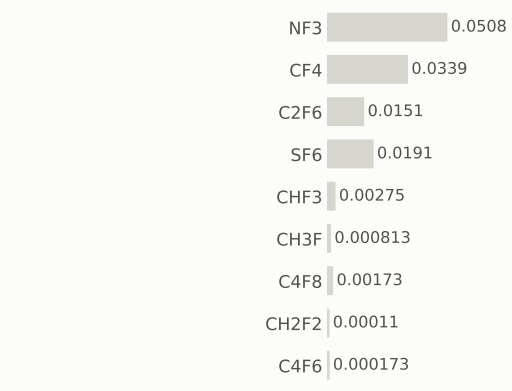


Step #370: Dry_etch


etch_strip · Dry_etch

0.801	47.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

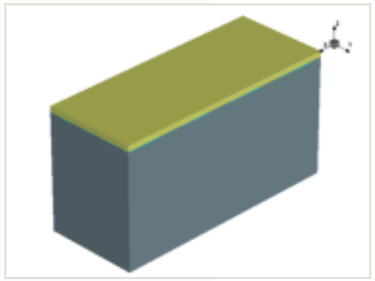

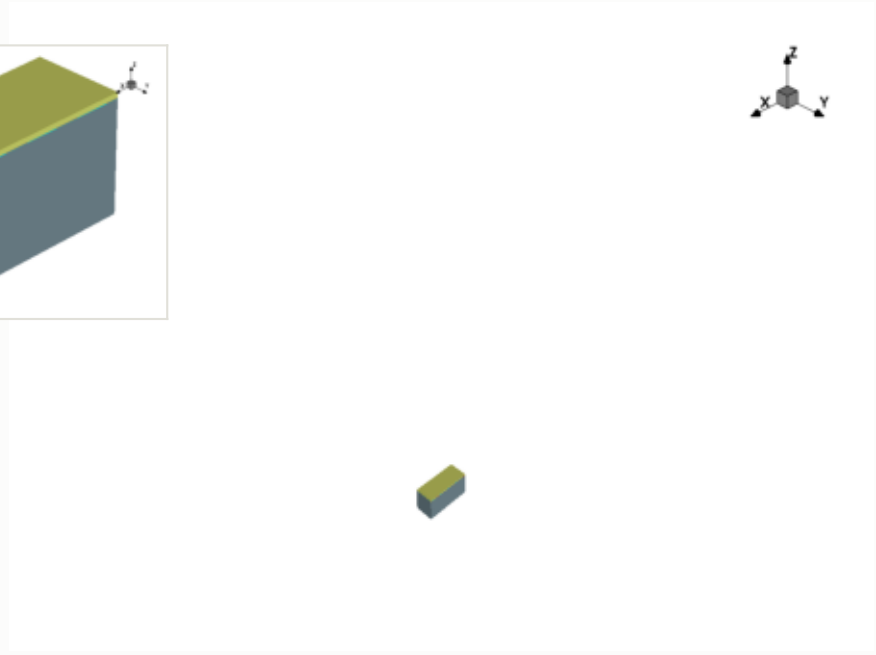


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

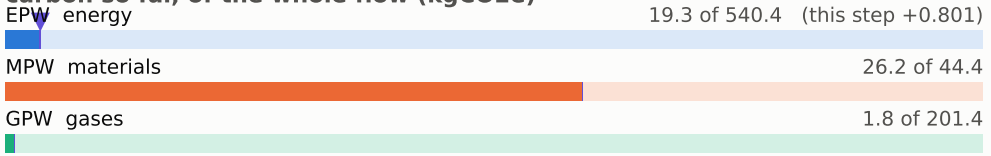


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

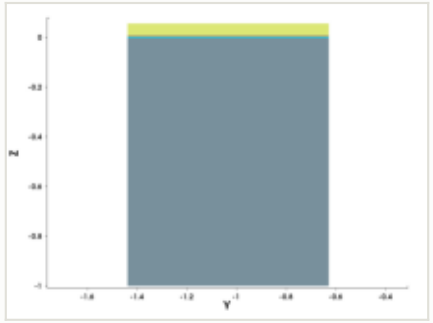


y cut at -1.035 µm

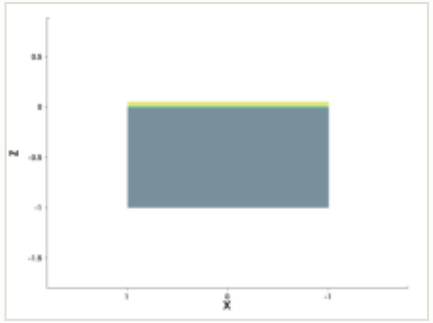

mask for this step

no mask for this step


steps by process area

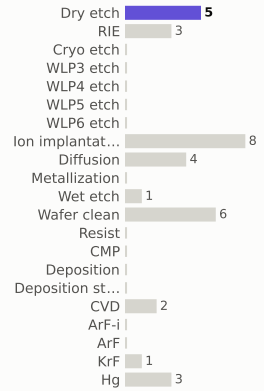

materials deposited (g)



gases emitted (g)

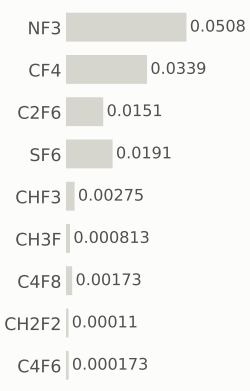


Step #380: Wafer_clean

clean · Wafer_clean

0.169	47.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

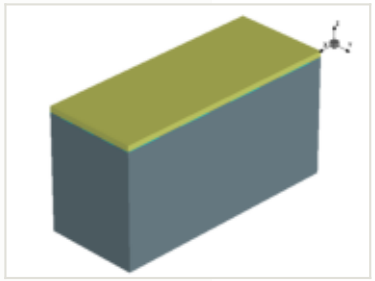






x cut at 0.000 µm

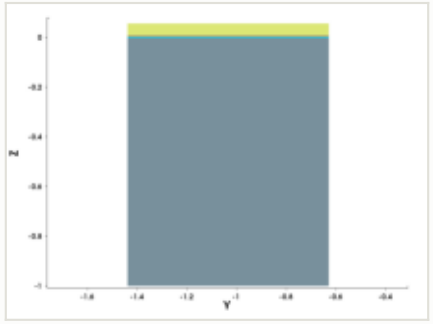

y cut at -1.035 µm

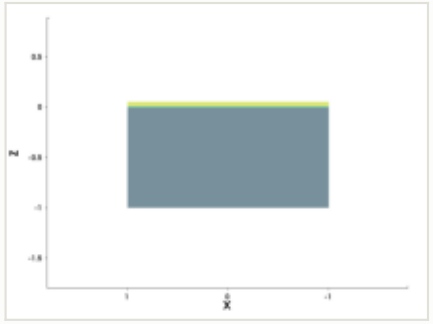

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

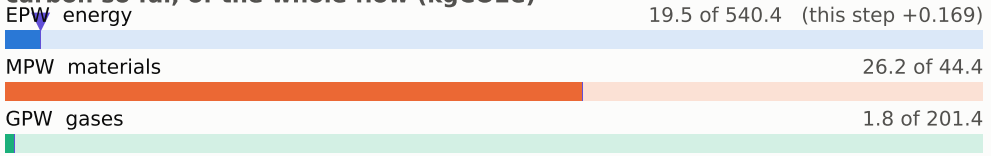


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

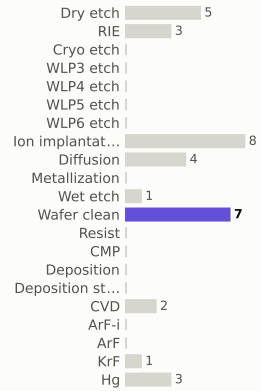

materials deposited (g)



gases emitted (g)

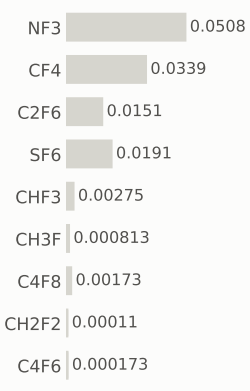


Step #390: Hg


litho_patterning · Hg

0.199	47.7	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

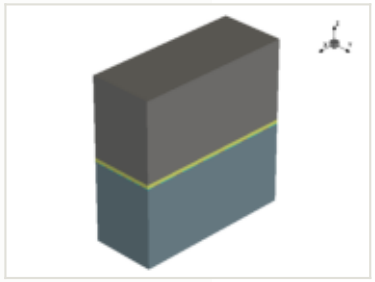

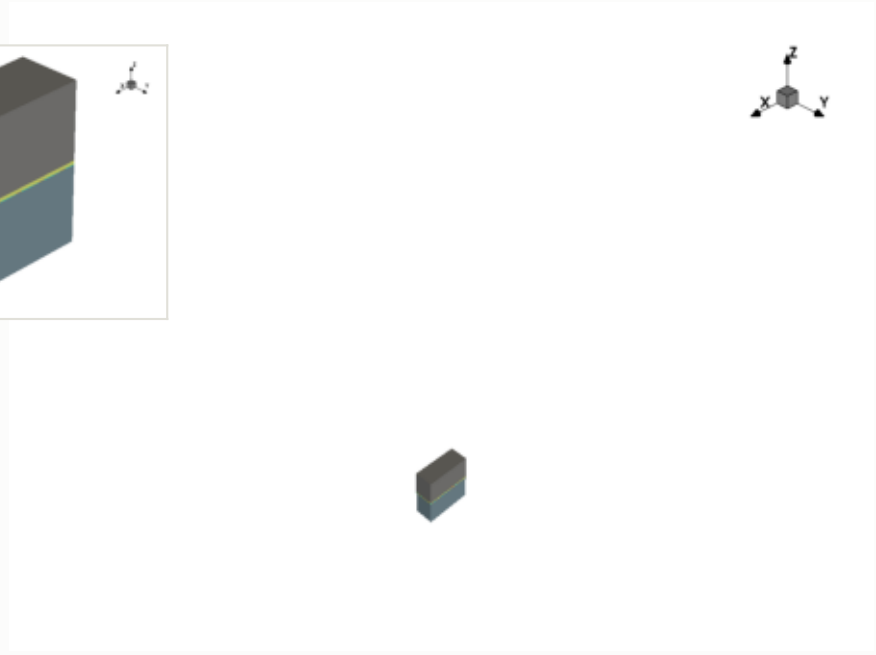


this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

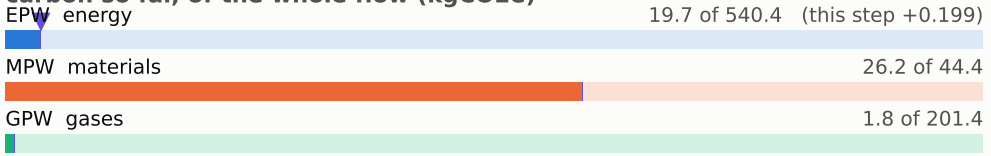


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

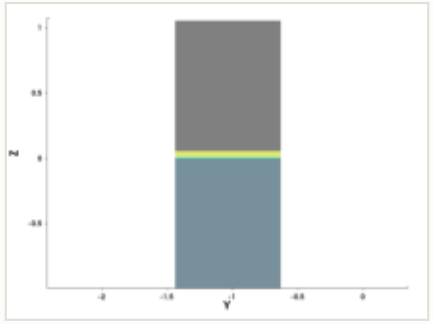


y cut at -1.035 µm

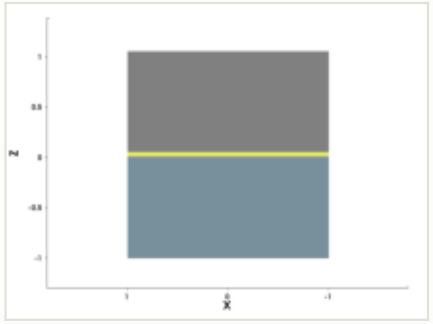


mask: layer 5:0, positive (OASIS)




steps by process area

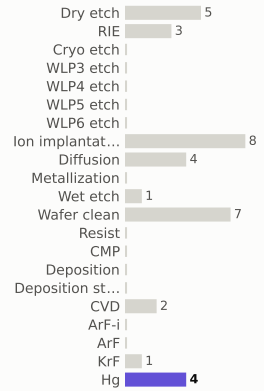

materials deposited (g)



gases emitted (g)

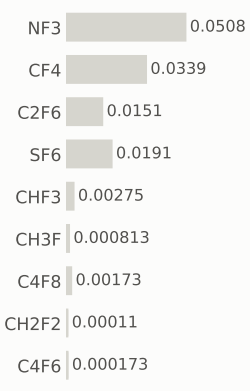


Step #400: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	48.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

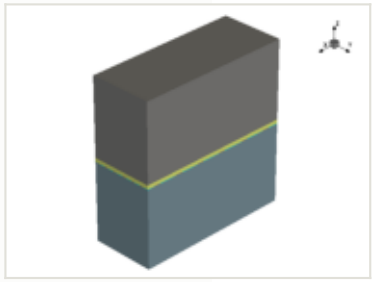






x cut at 0.000 µm

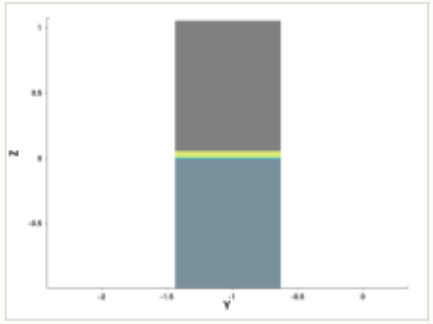

y cut at -1.035 µm

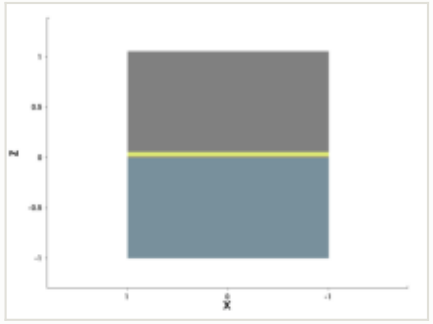

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

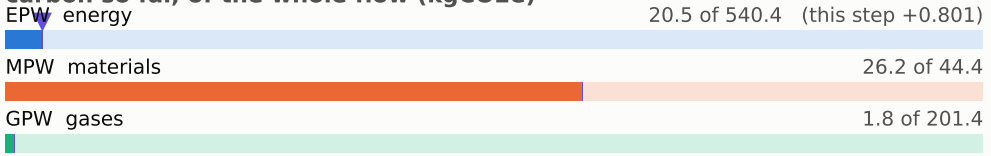


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

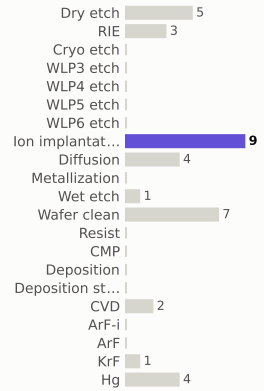

materials deposited (g)



gases emitted (g)

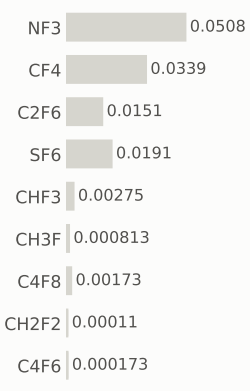


Step #410: Dry_etch


etch_strip · Dry_etch

0.801	49.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

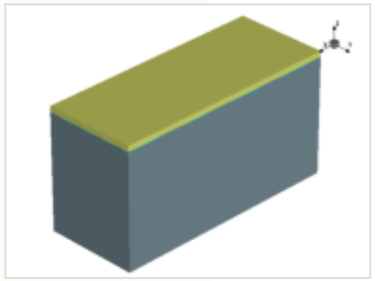


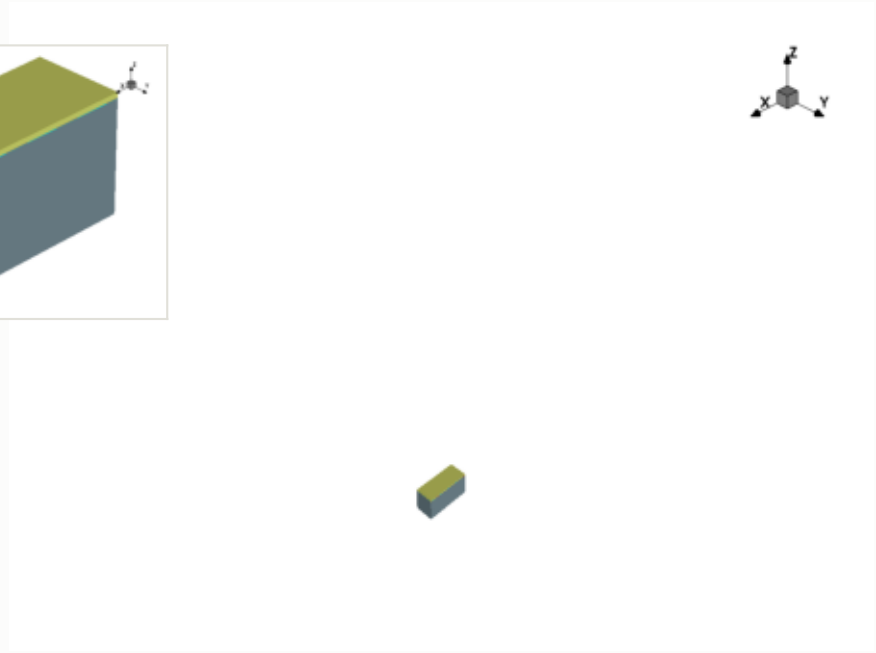

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

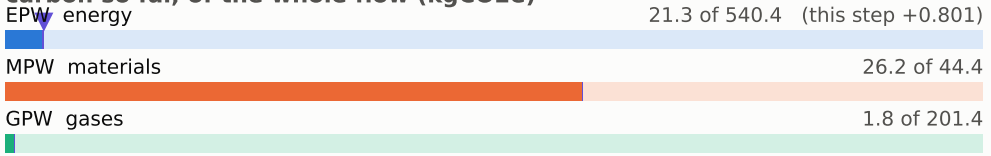


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

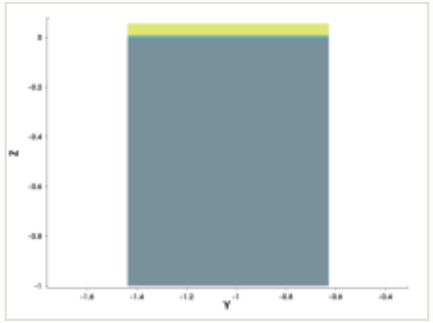


y cut at -1.035 µm

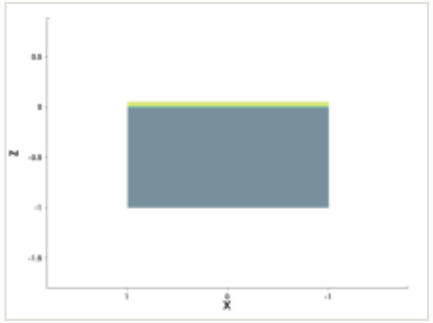


mask for this step

no mask for this step


steps by process area

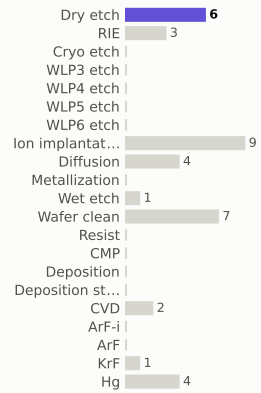

materials deposited (g)

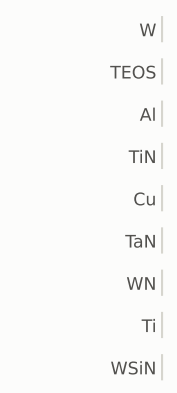

gases emitted (g)




Step #420: Wafer_clean


clean · Wafer_clean

0.169	49.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

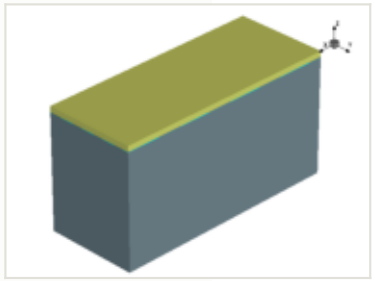

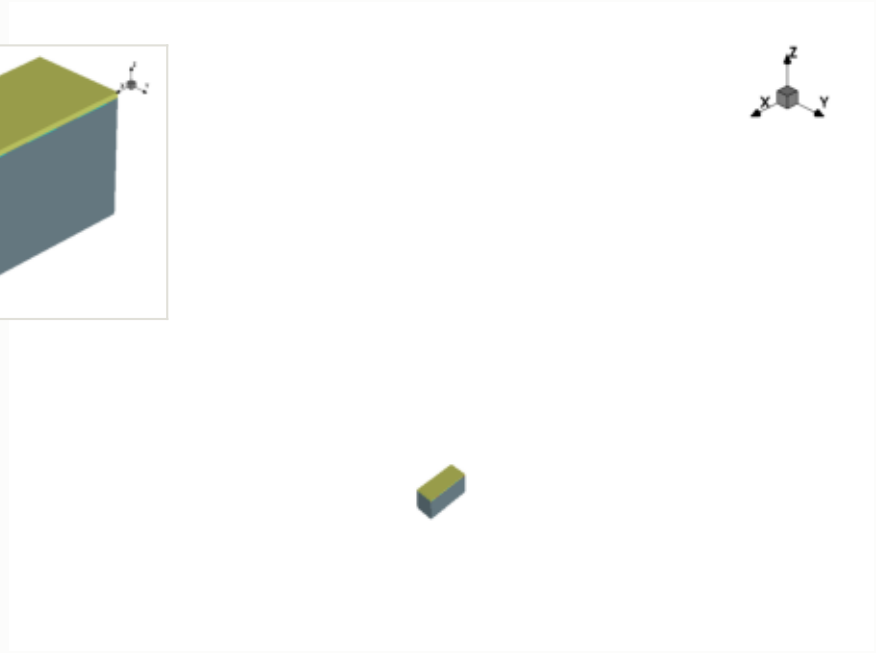


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

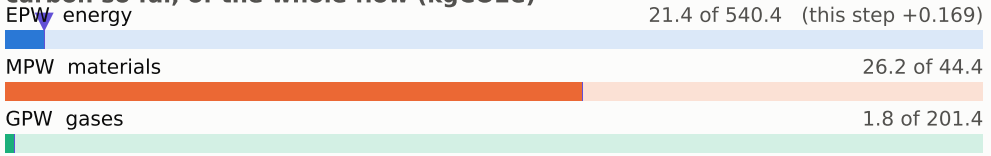


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

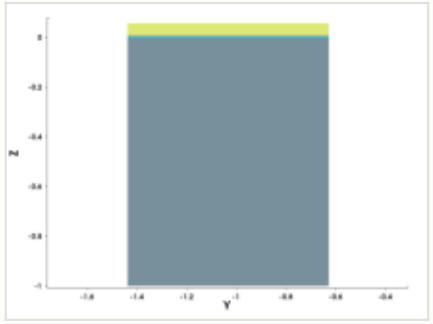


y cut at -1.035 µm

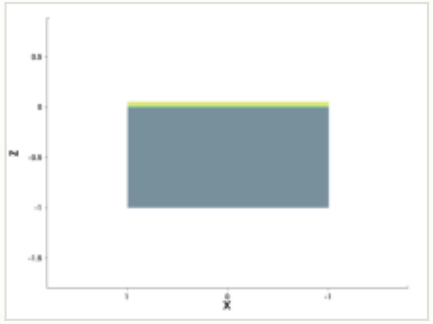

mask for this step

no mask for this step


steps by process area

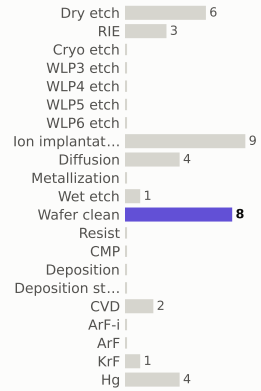

materials deposited (g)



gases emitted (g)

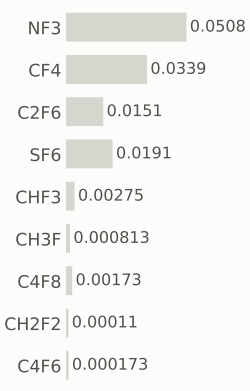


Step #430: Hg

litho_patterning · Hg

0.199	49.7	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

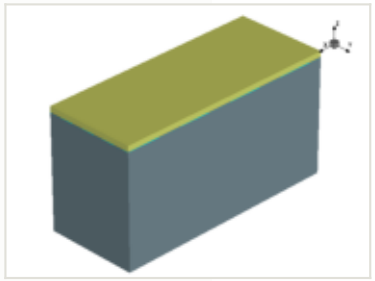






this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

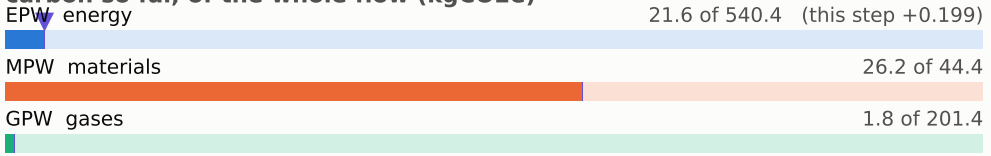


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

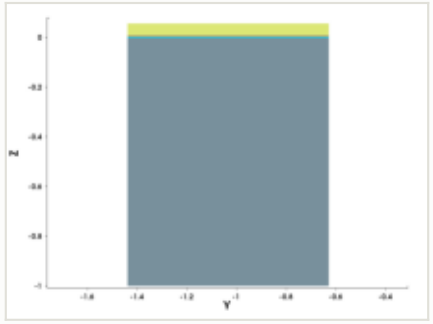


y cut at -1.035 µm

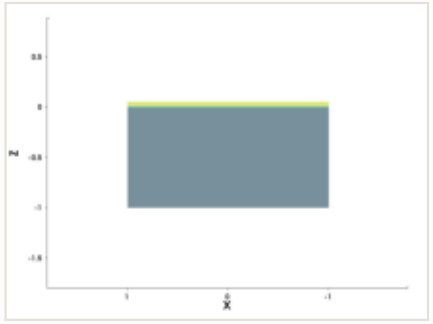

mask: layer 6:0 (OASIS)




steps by process area

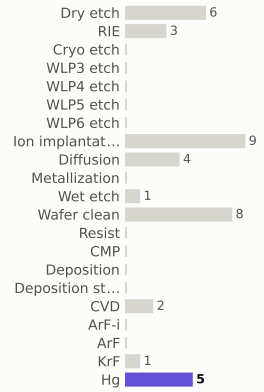

materials deposited (g)



gases emitted (g)

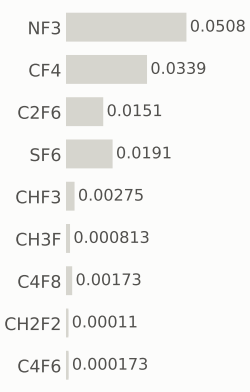


Step #440: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	50.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

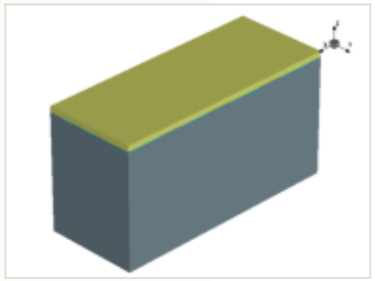






x cut at 0.000 µm

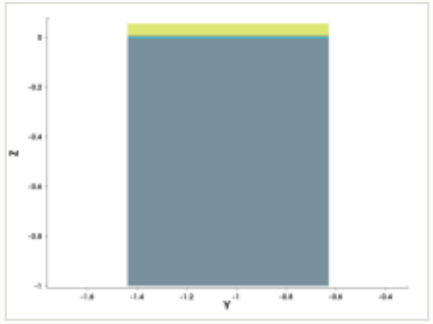

y cut at -1.035 µm

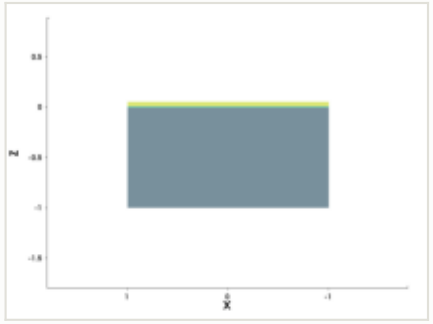

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

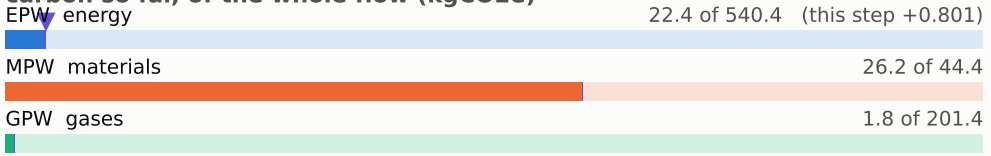

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

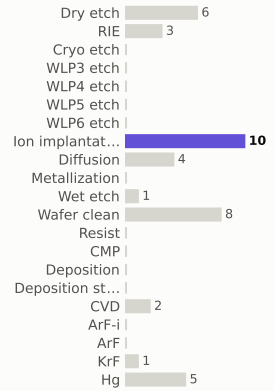

materials deposited (g)



gases emitted (g)

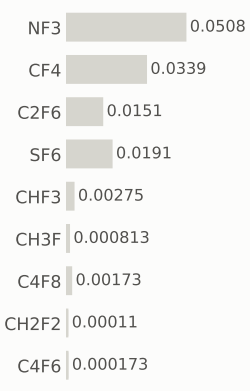


Step #450: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	51.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

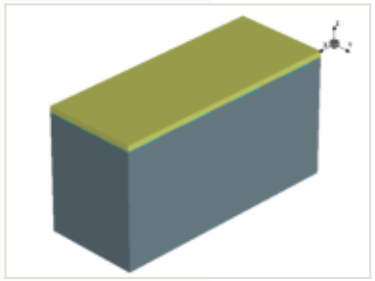






x cut at 0.000 µm

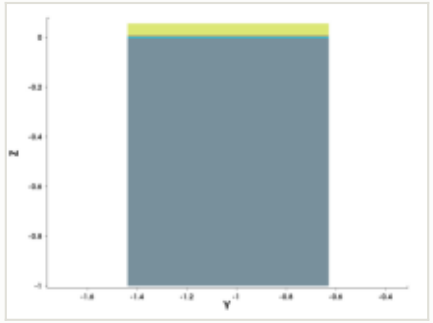

y cut at -1.035 µm

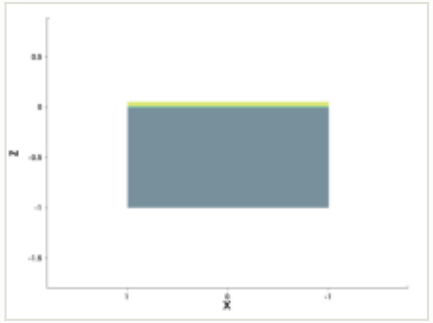

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

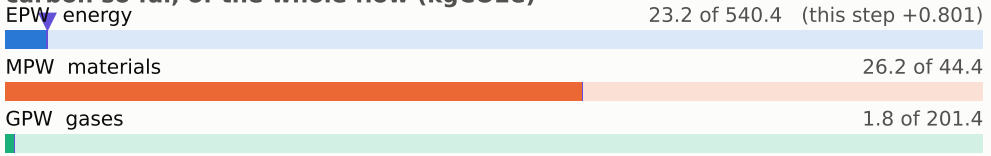

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

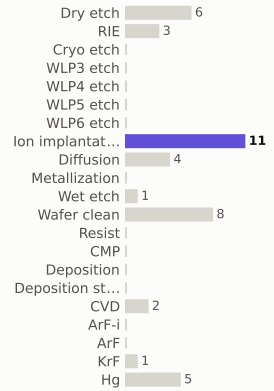

materials deposited (g)



gases emitted (g)

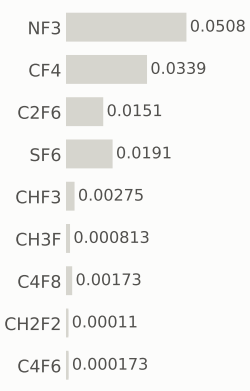


Step #460: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	52.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

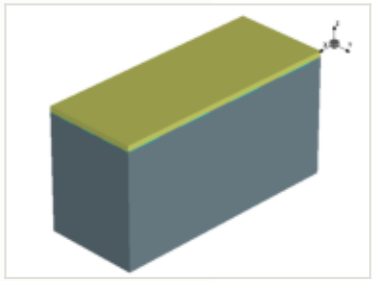






x cut at 0.000 µm

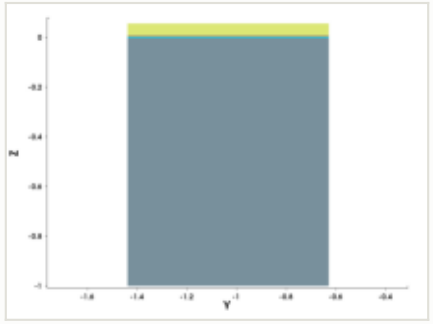

y cut at -1.035 µm

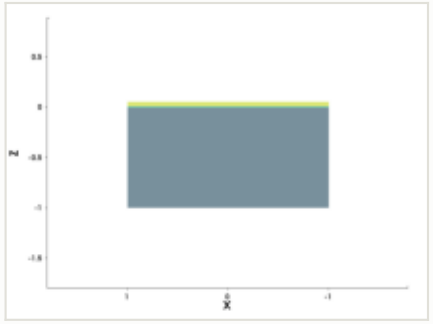

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

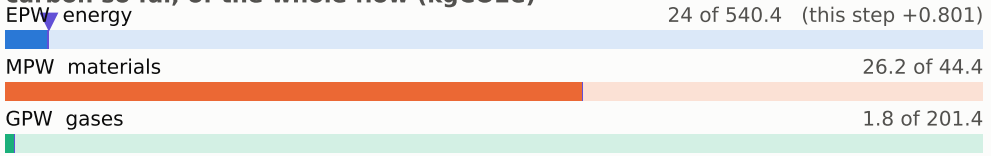


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

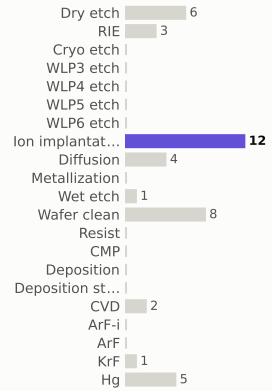

materials deposited (g)



gases emitted (g)

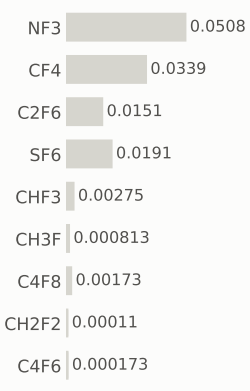


Step #470: Dry_etch


etch_strip · Dry_etch

0.801	52.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

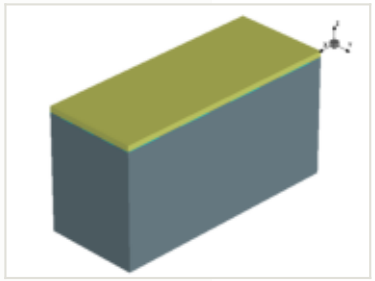

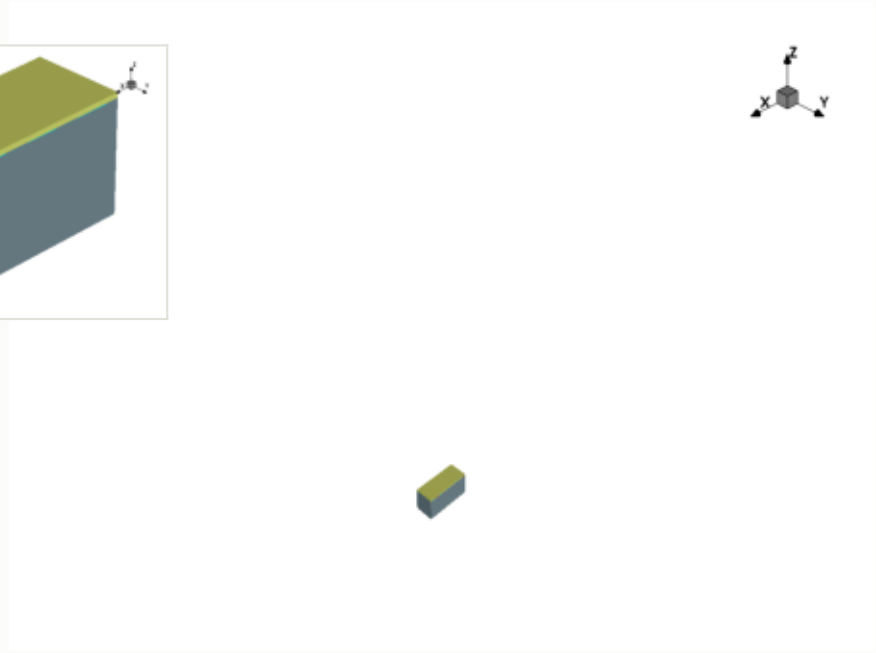


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

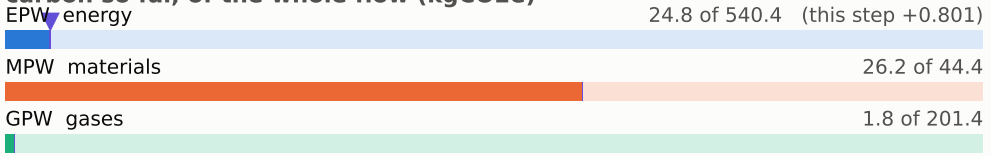


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

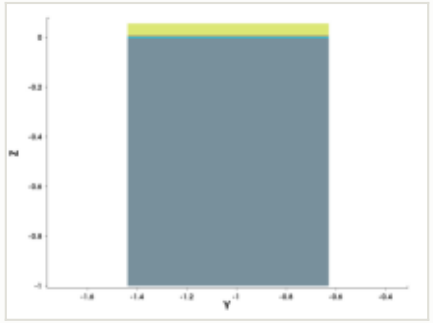


y cut at -1.035 µm

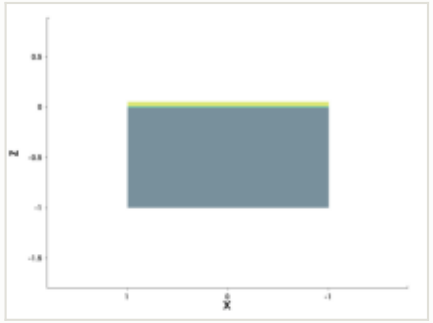

mask for this step

no mask for this step


steps by process area

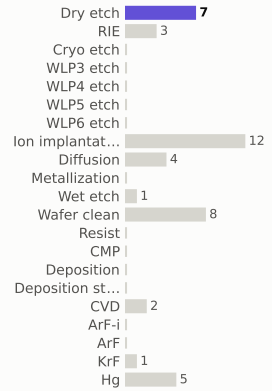

materials deposited (g)



gases emitted (g)

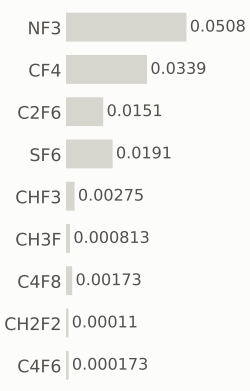


Step #480: Wafer_clean

clean · Wafer_clean

0.169	53	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

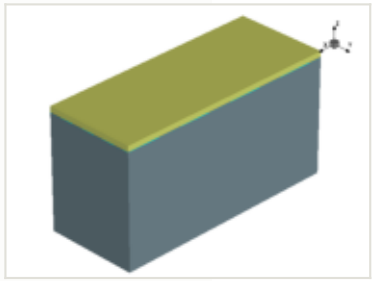






x cut at 0.000 µm

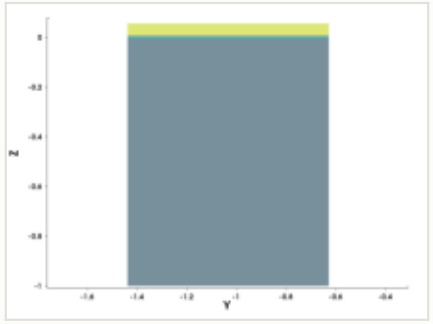

y cut at -1.035 µm

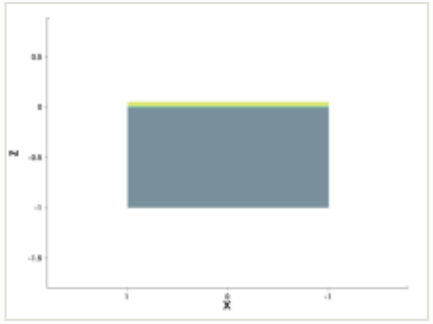

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

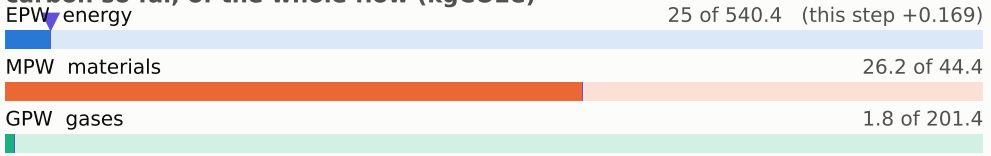


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

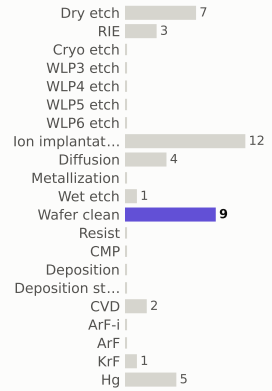

materials deposited (g)



gases emitted (g)

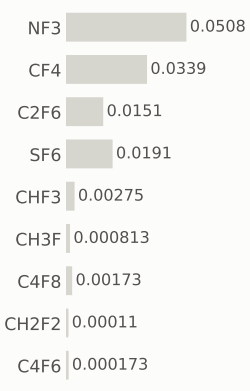


Step #490: Hg


litho_patterning · Hg

0.199	53.2	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

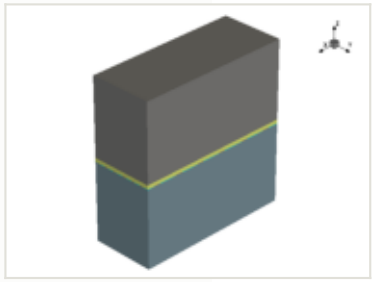

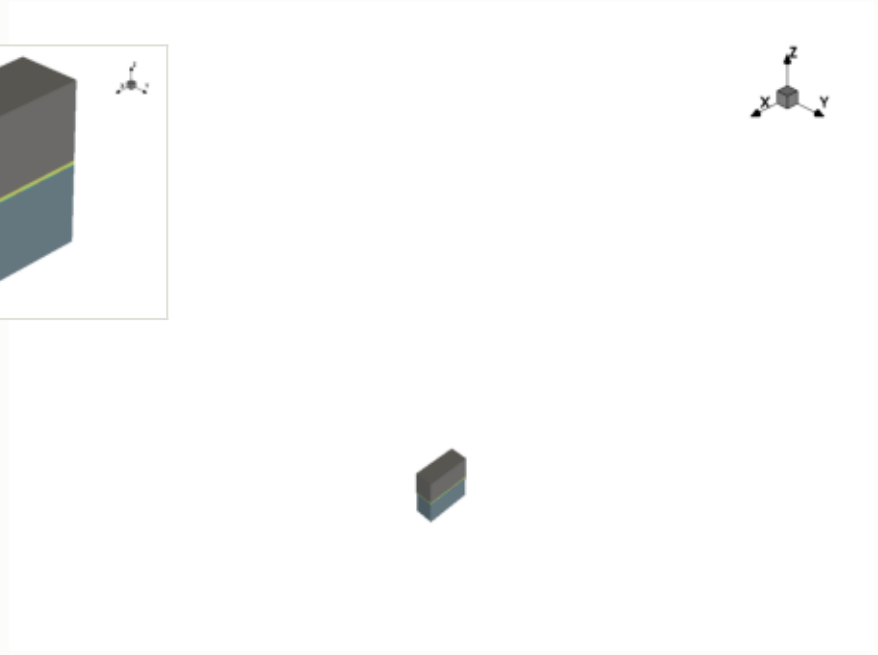


this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

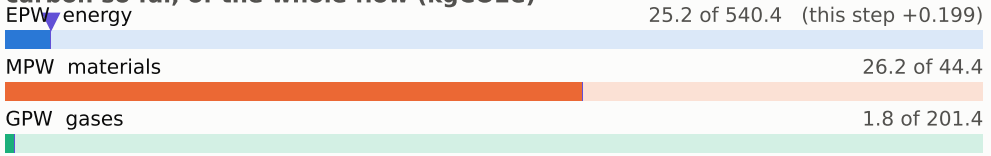


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

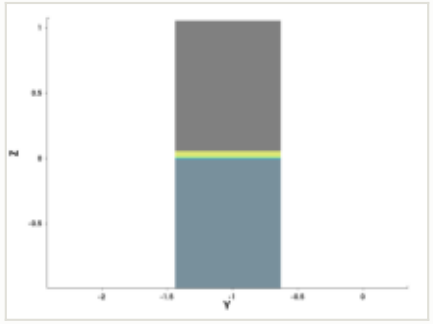


y cut at -1.035 µm

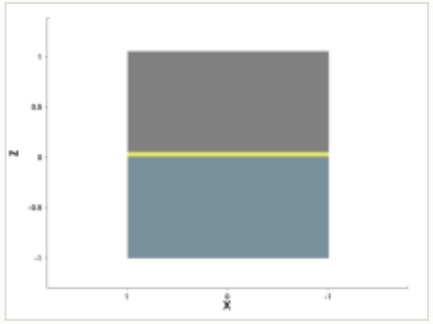

mask: layer 7:0, positive (OASIS)




steps by process area

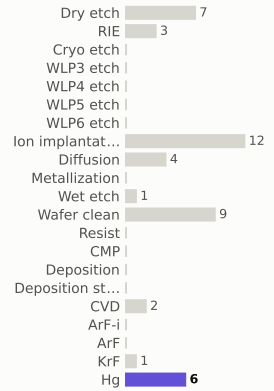

materials deposited (g)



gases emitted (g)

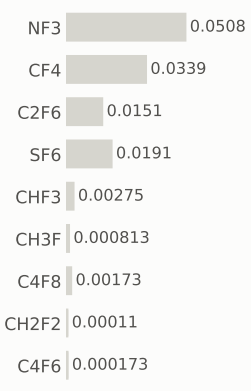


Step #500: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	54	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

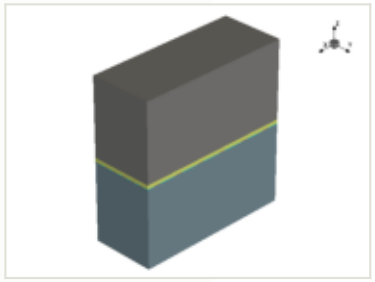


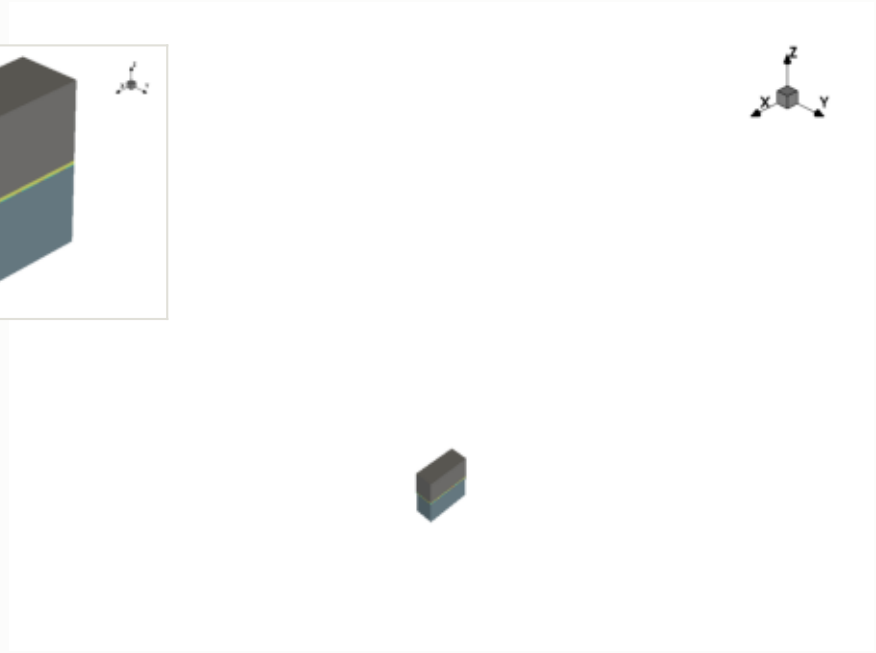

x cut at 0.000 µm

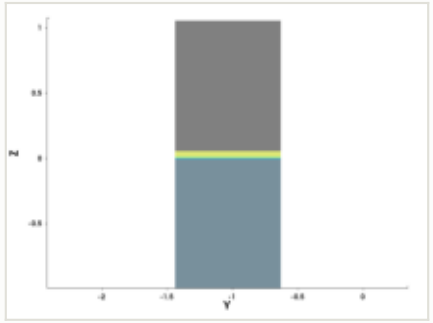

y cut at -1.035 µm

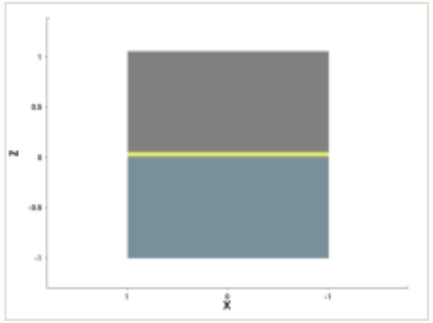

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

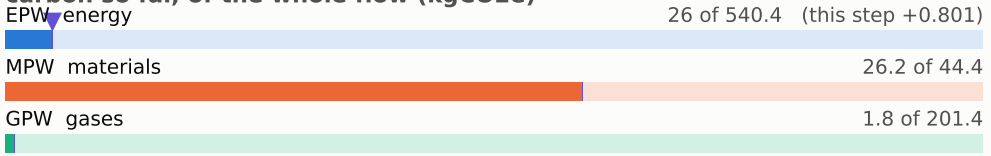

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

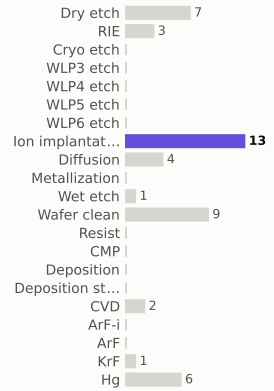

materials deposited (g)



gases emitted (g)




Step #510: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	54.8	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

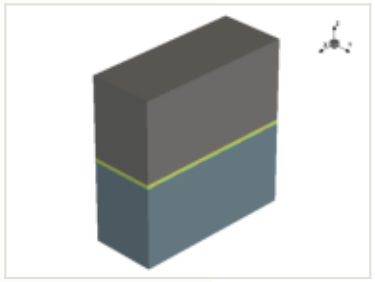


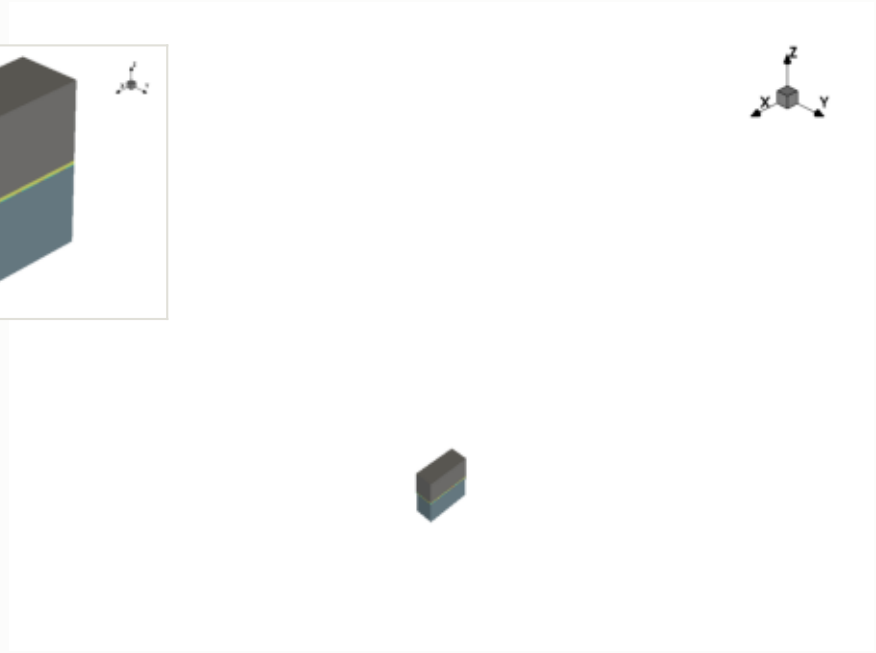

x cut at 0.000 µm

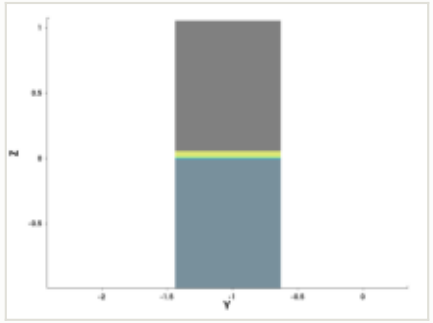

y cut at -1.035 µm

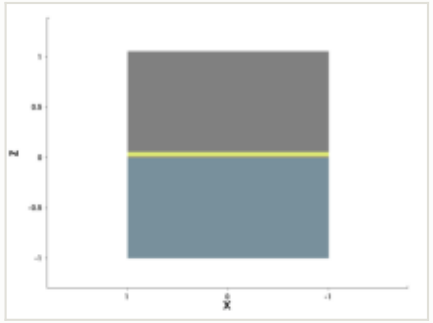

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

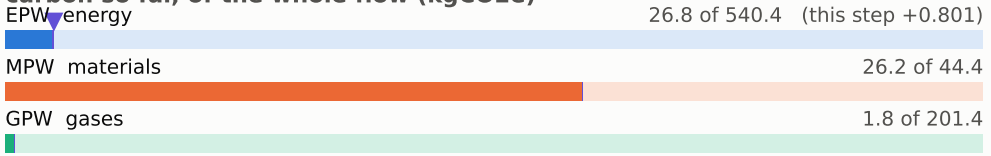


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

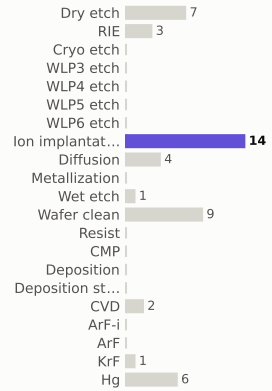

materials deposited (g)

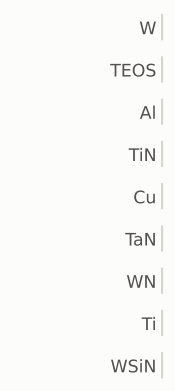

gases emitted (g)

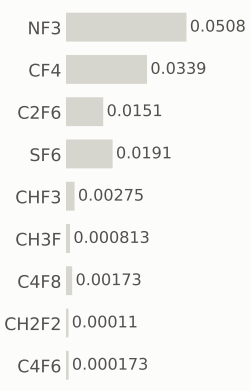


Step #520: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	55.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

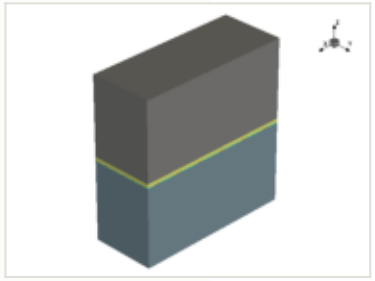


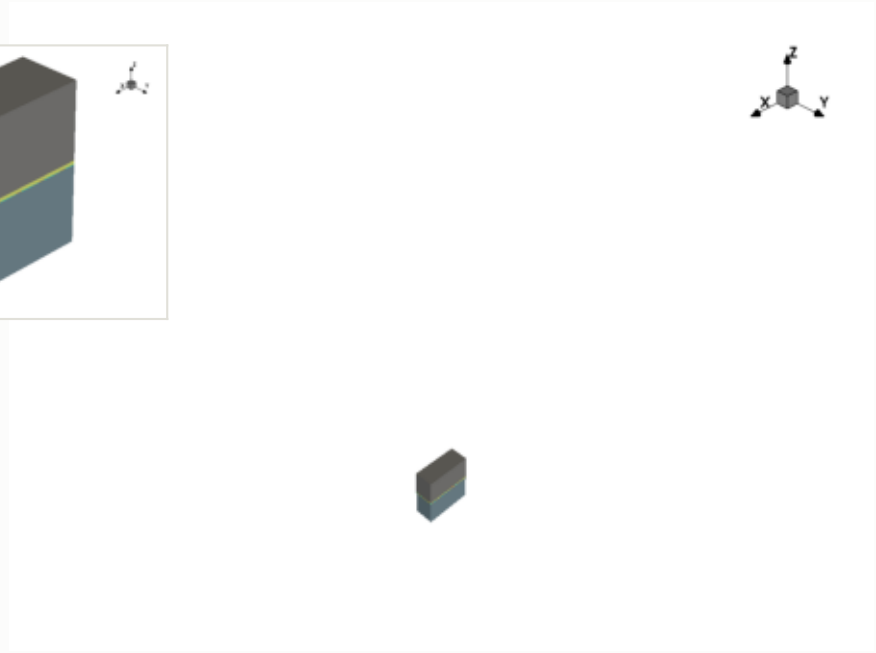

x cut at 0.000 µm

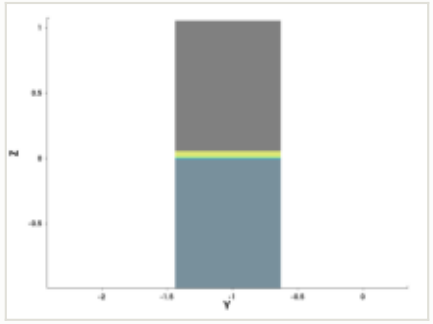

y cut at -1.035 µm

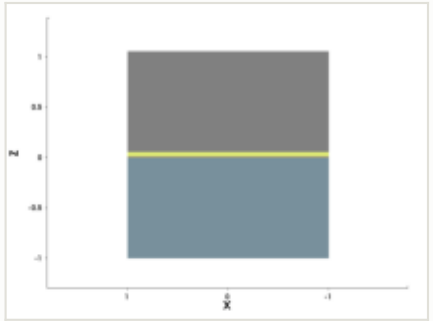

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

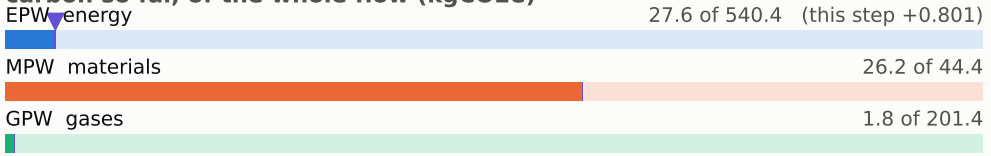

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

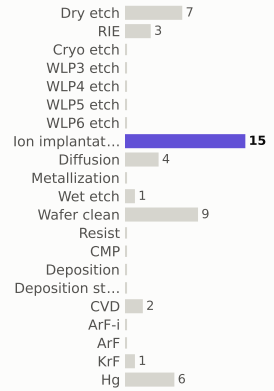

materials deposited (g)



gases emitted (g)

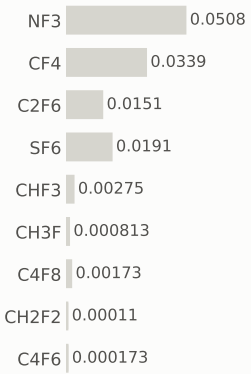


Step #530: Dry_etch

etch_strip · Dry_etch

0.801	56.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

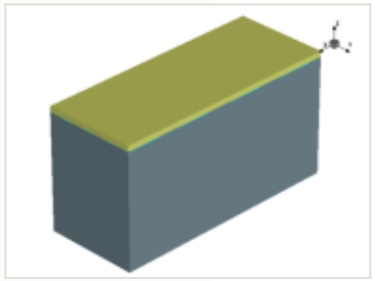






this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

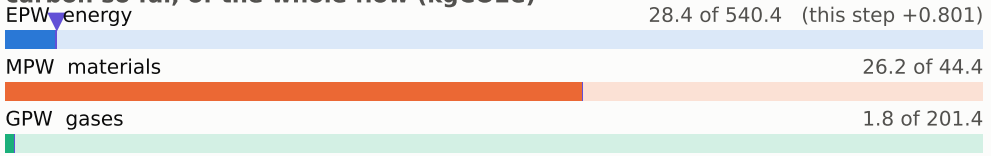


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

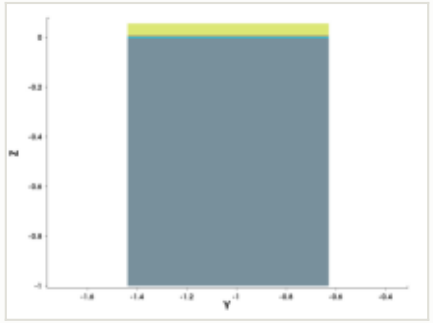


y cut at -1.035 µm

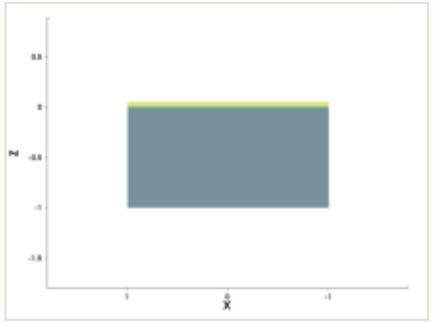


mask for this step

no mask for this step


steps by process area

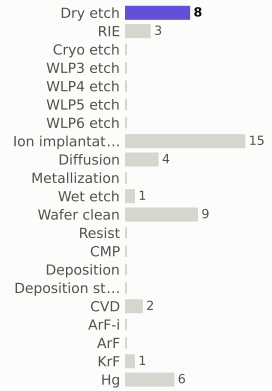

materials deposited (g)



gases emitted (g)

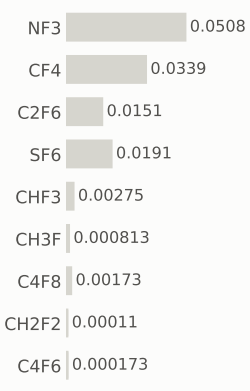


Step #540: Wafer_clean

clean · Wafer_clean

0.169	56.6	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

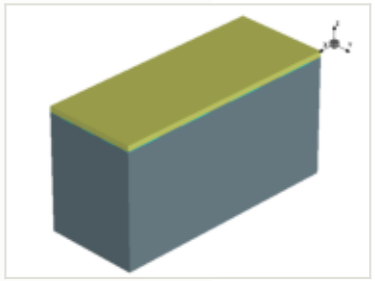






x cut at 0.000 µm

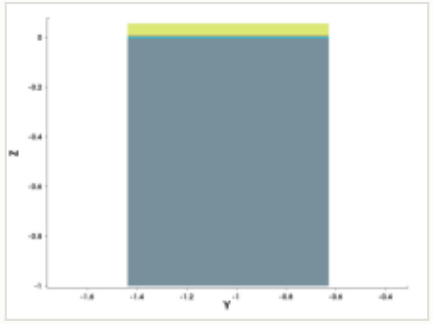

y cut at -1.035 µm

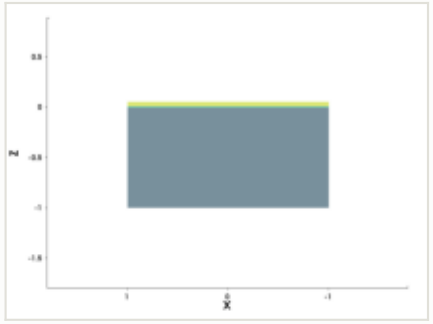

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

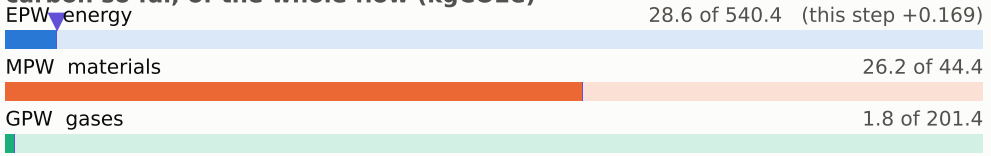


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

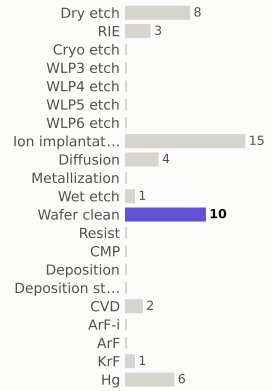

materials deposited (g)



gases emitted (g)

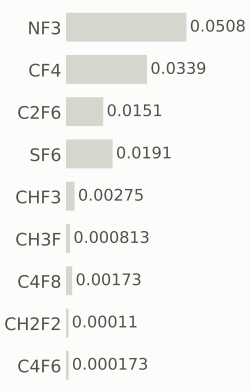


Step #550: Hg

litho_patterning · Hg

0.199	56.8	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

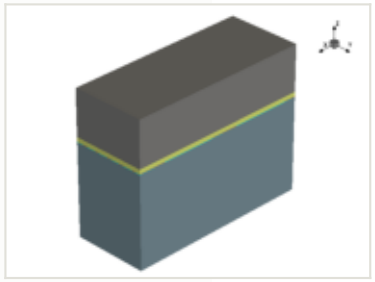






this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

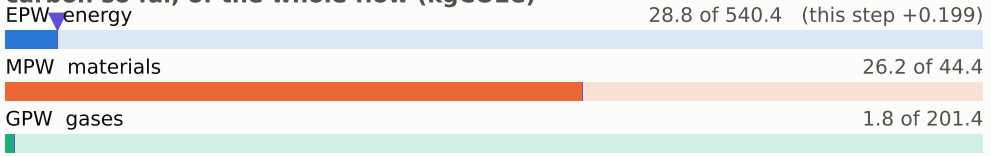


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

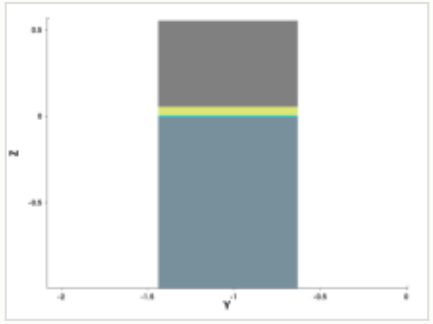


y cut at -1.035 µm

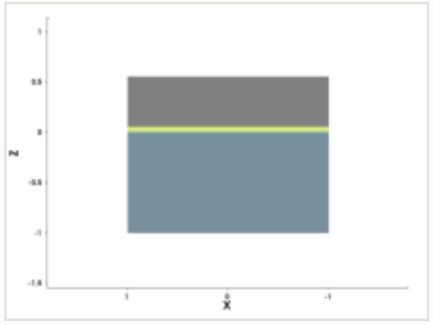

mask: layer 8:0, positive (OASIS)




steps by process area

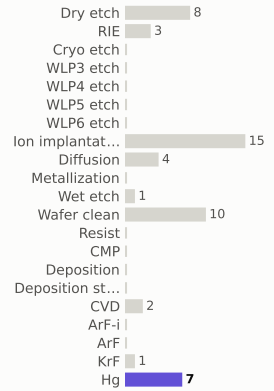

materials deposited (g)



gases emitted (g)

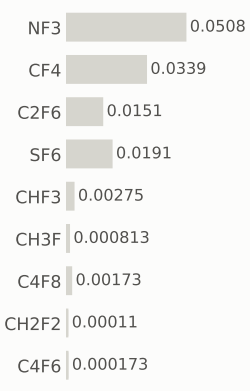


Step #560: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	57.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

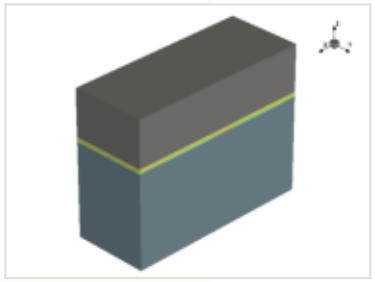


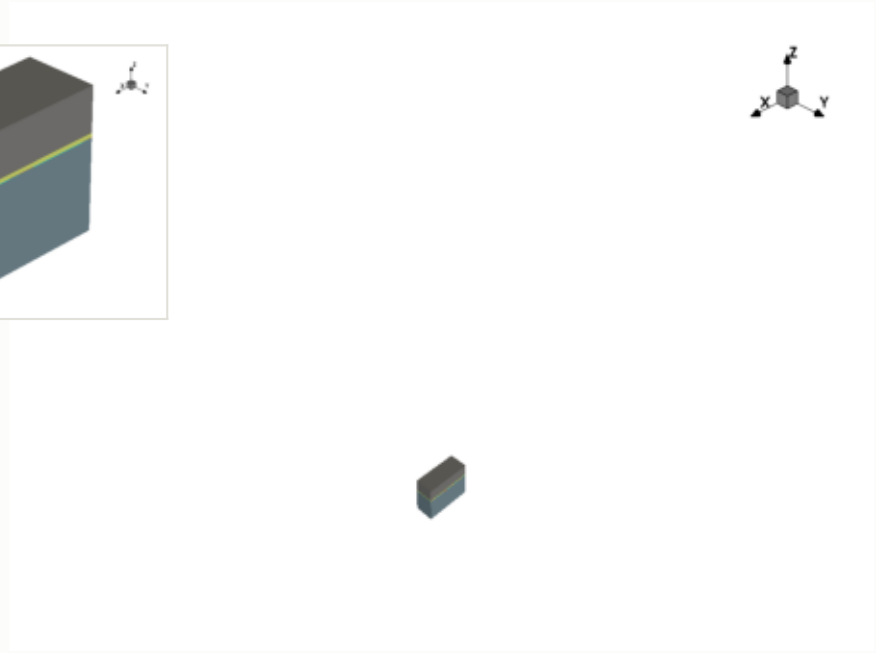

x cut at 0.000 µm

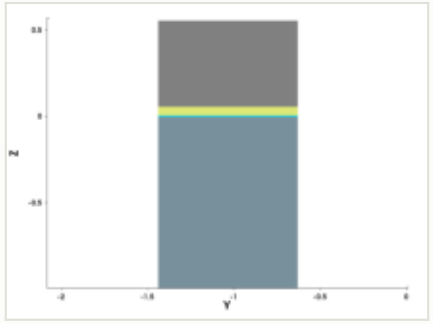

y cut at -1.035 µm

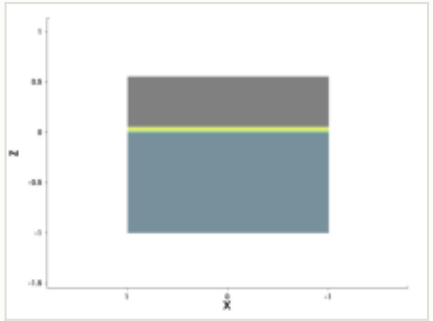

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

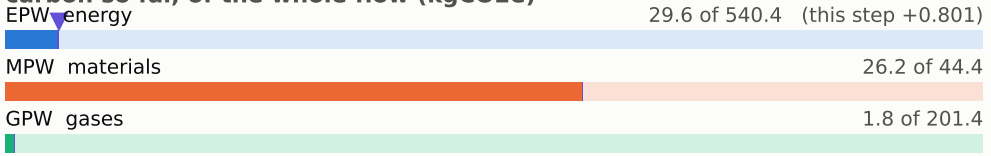

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

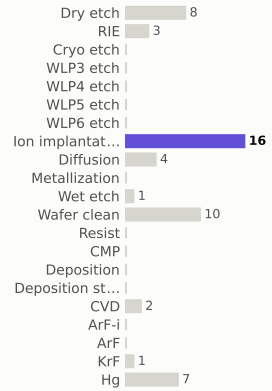

materials deposited (g)



gases emitted (g)

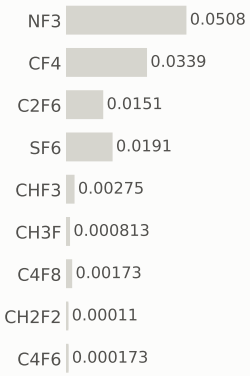


Step #570: Dry_etch


etch_strip · Dry_etch

0.801	58.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

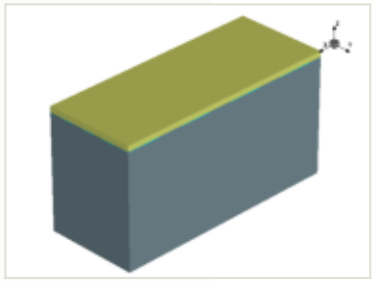

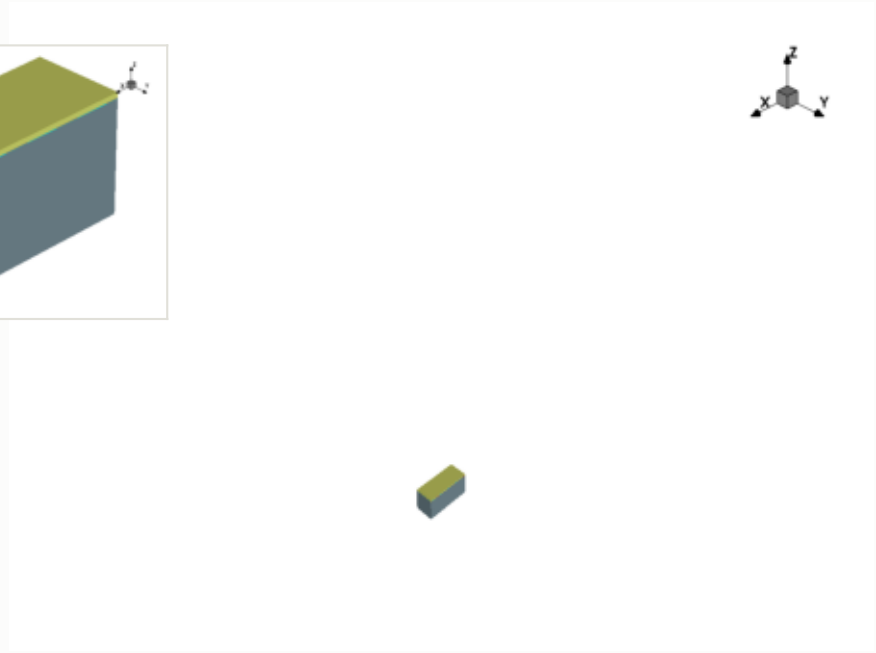


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

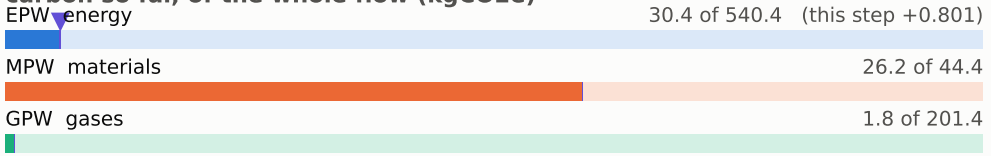


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

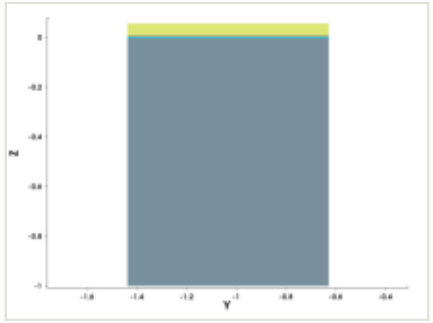


y cut at -1.035 µm

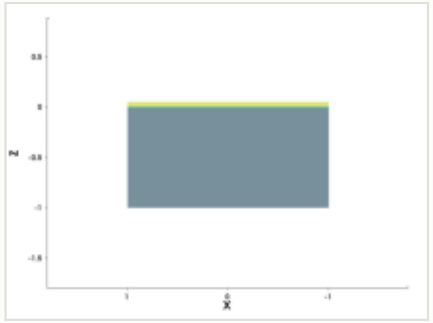


mask for this step

no mask for this step


steps by process area

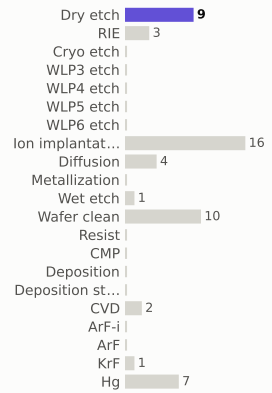

materials deposited (g)



gases emitted (g)

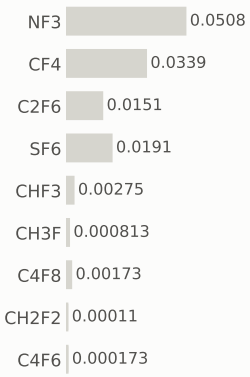


Step #580: Wafer_clean

clean · Wafer_clean

0.169	58.6	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

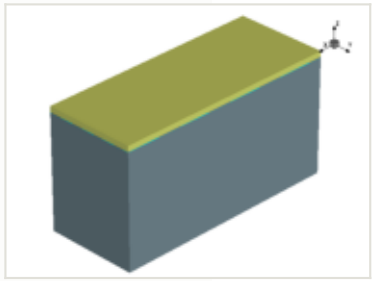






x cut at 0.000 µm

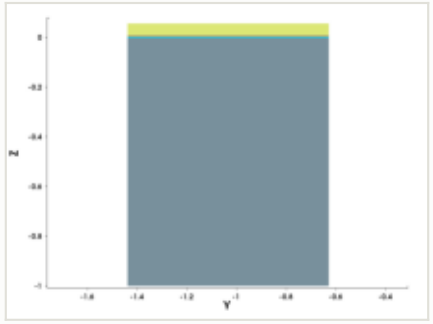

y cut at -1.035 µm

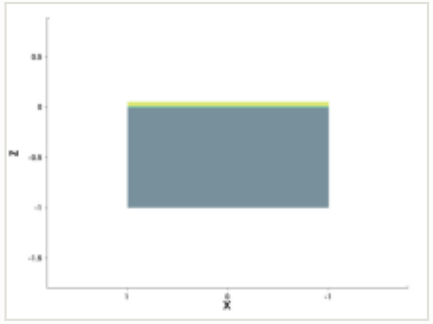

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

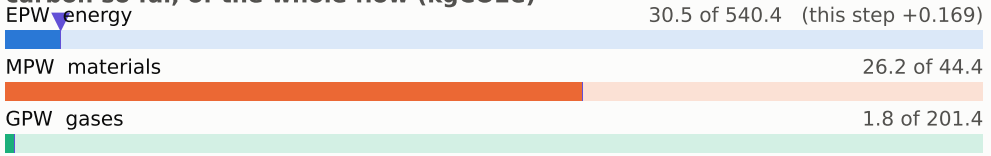


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

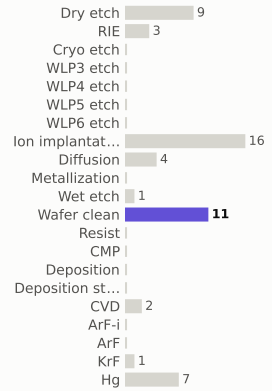

materials deposited (g)



gases emitted (g)

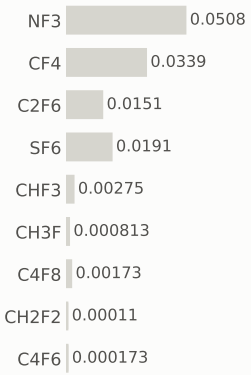


Step #590: Hg


litho_patterning · Hg

0.199	58.8	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

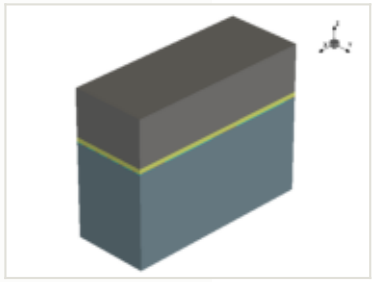

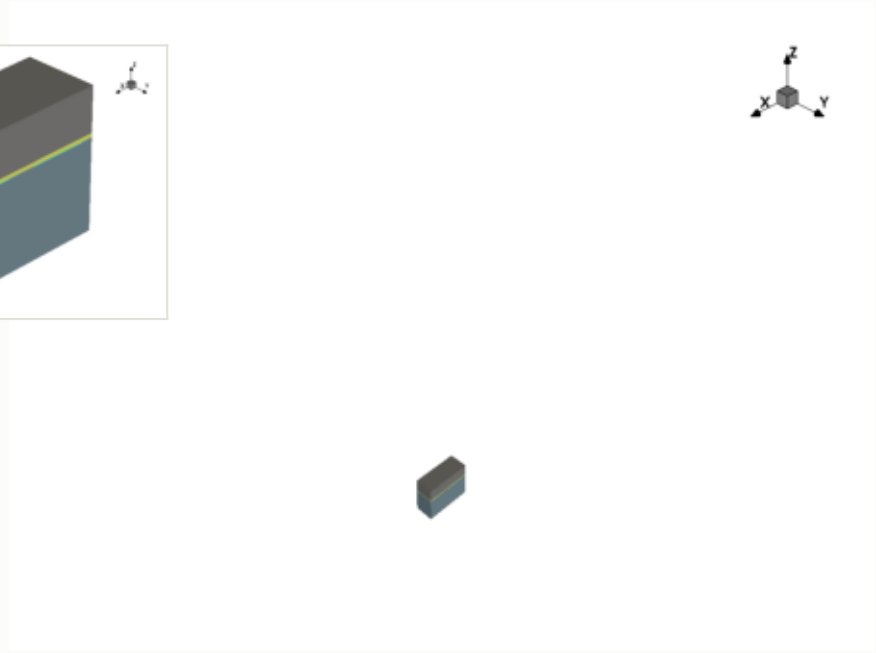


this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

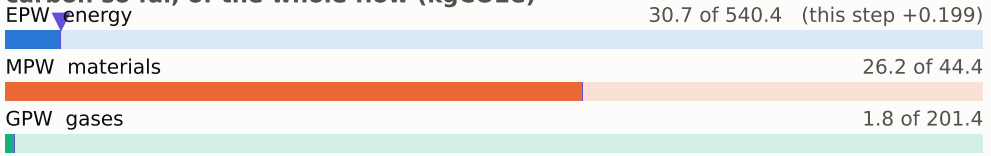


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

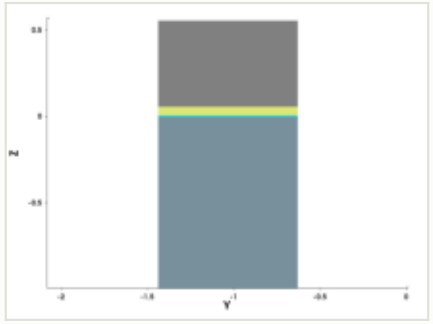


y cut at -1.035 µm

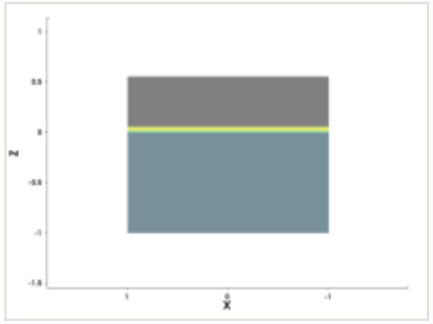


mask: layer 9:0, positive (OASIS)




steps by process area

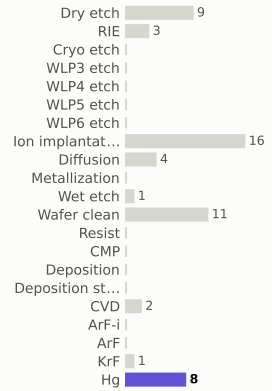

materials deposited (g)



gases emitted (g)

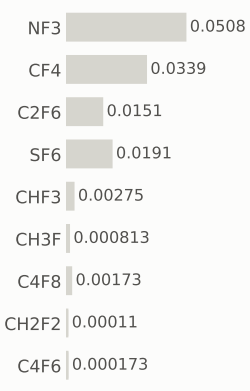


Step #600: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	59.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

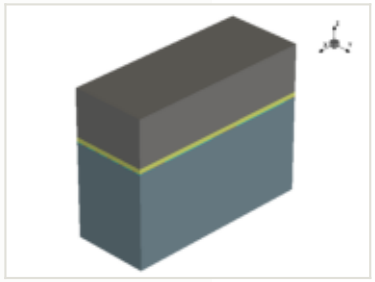






x cut at 0.000 µm

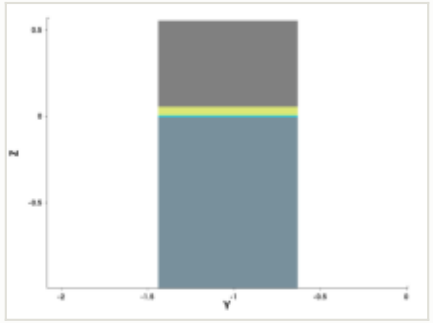

y cut at -1.035 µm

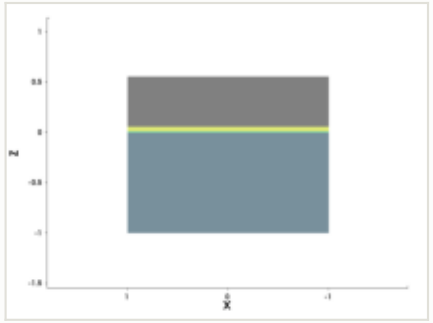

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

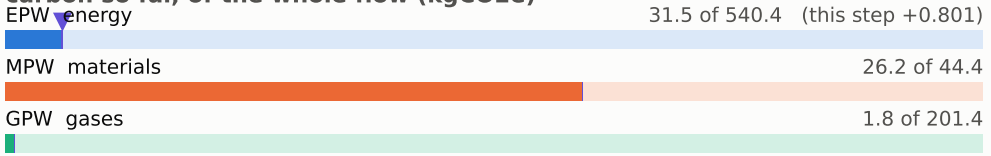

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

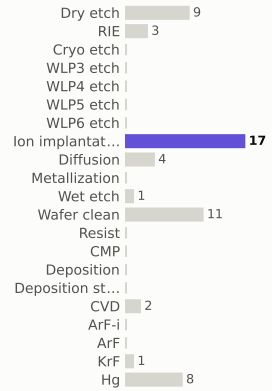

materials deposited (g)



gases emitted (g)

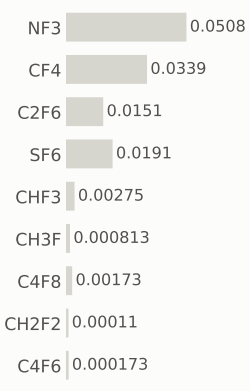


Step #610: Dry_etch


etch_strip · Dry_etch

0.801	60.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

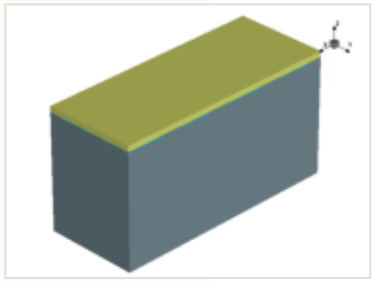

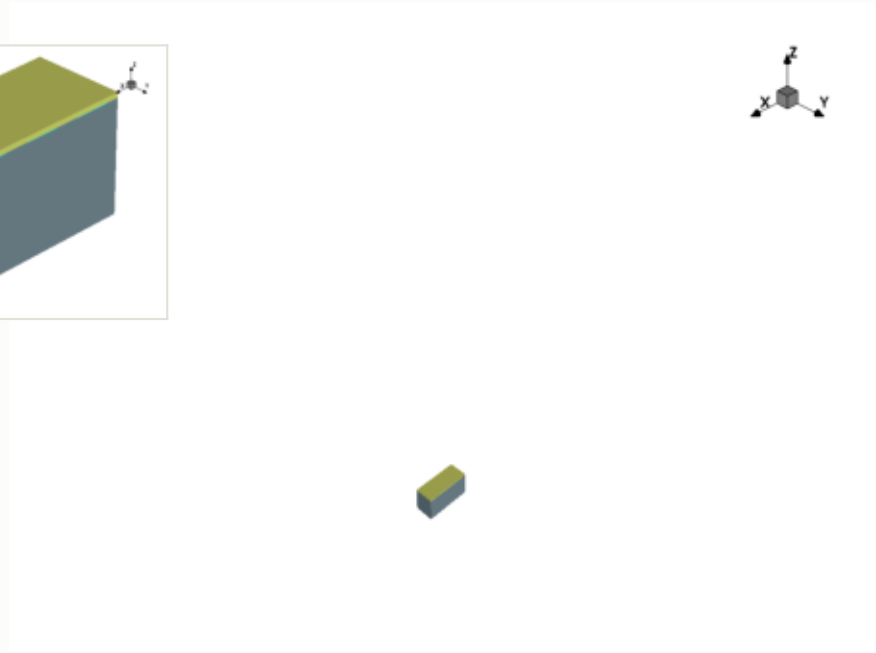


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

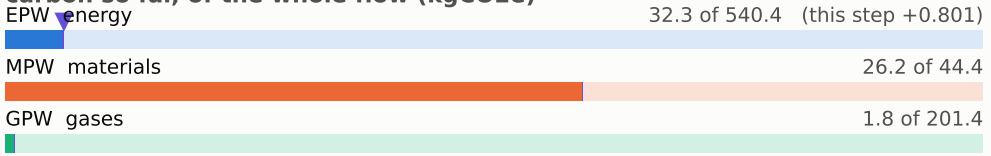


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

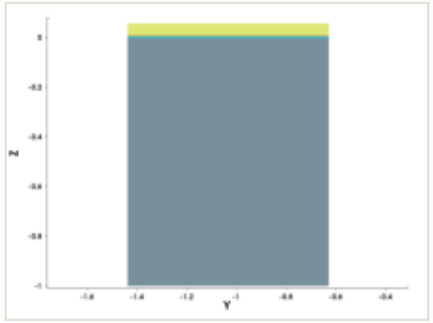


y cut at -1.035 µm

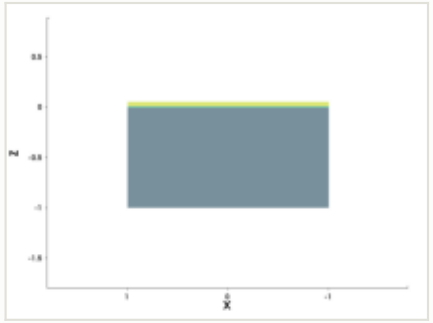


mask for this step

no mask for this step


steps by process area

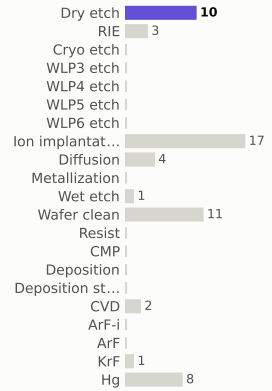

materials deposited (g)



gases emitted (g)

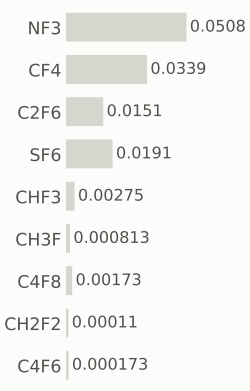


Step #620: Wafer_clean

clean · Wafer_clean

0.169	60.6	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

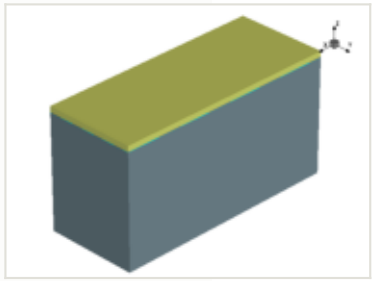






x cut at 0.000 µm

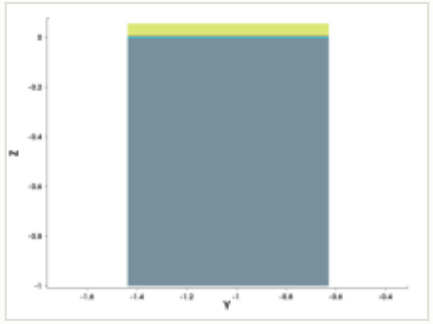

y cut at -1.035 µm

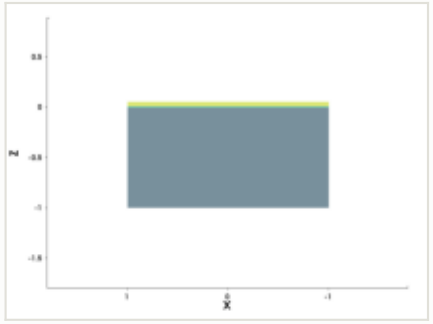

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

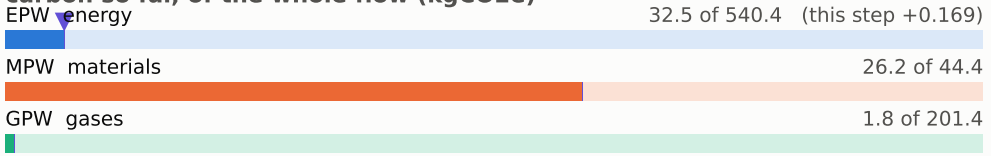


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

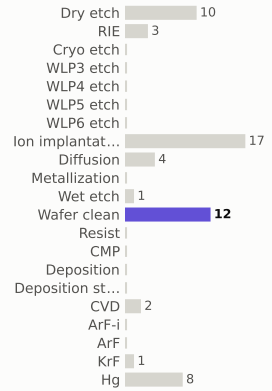

materials deposited (g)



gases emitted (g)

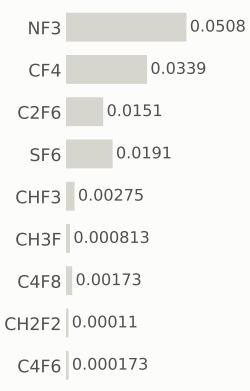


Step #640: ArF


litho_patterning · ArF

0.199	60.7	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

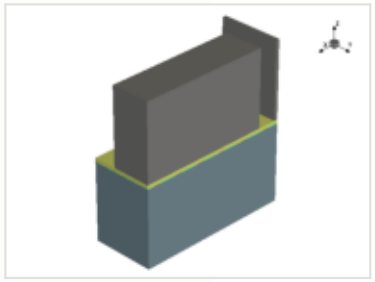


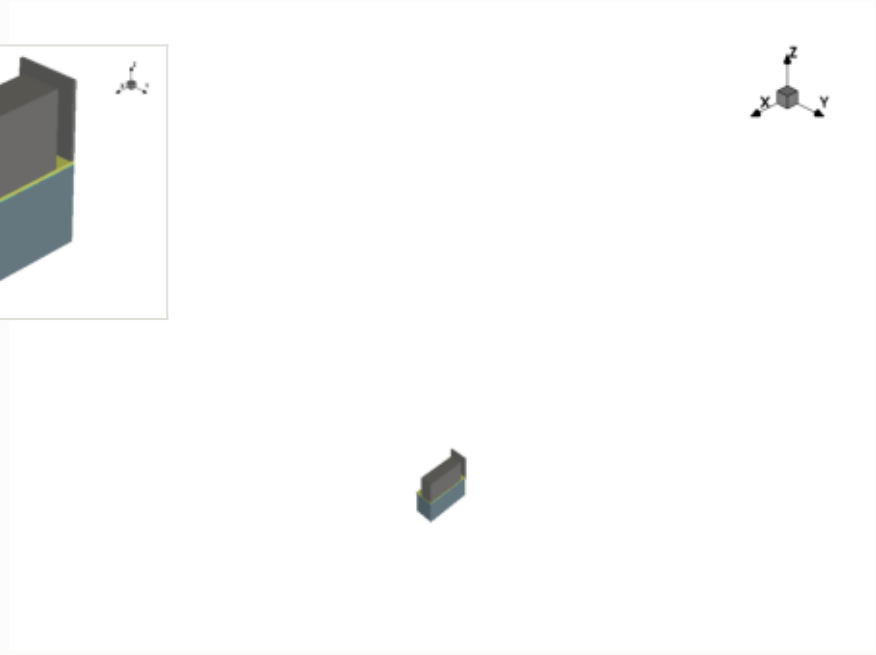

this step

process area	ArF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

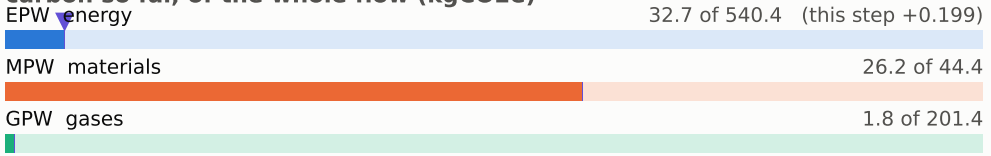


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

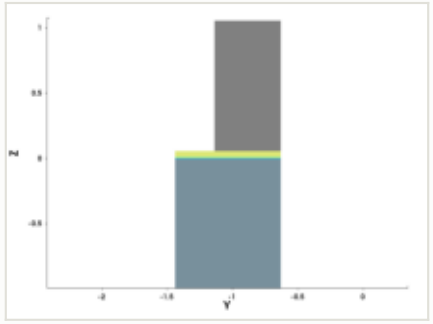


y cut at -1.035 µm

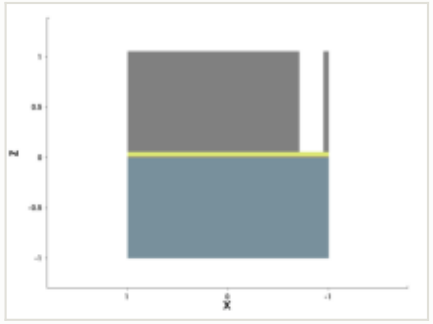


mask: layer 10:0, positive (OASIS)




steps by process area

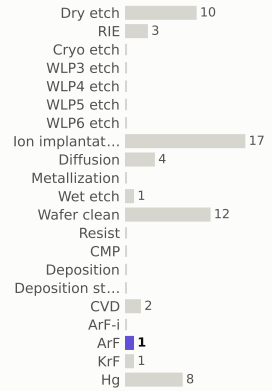

materials deposited (g)



gases emitted (g)

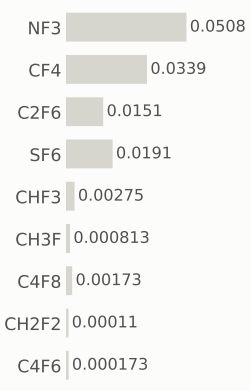


Step #650: RIE

etch_anisotropic · RIE

1.04	61.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

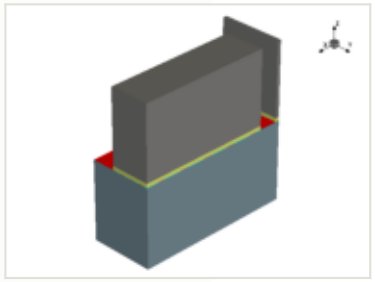






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

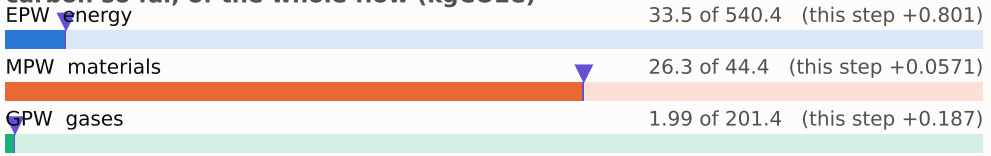


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

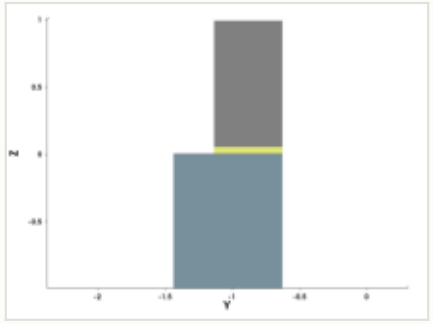


y cut at -1.035 µm

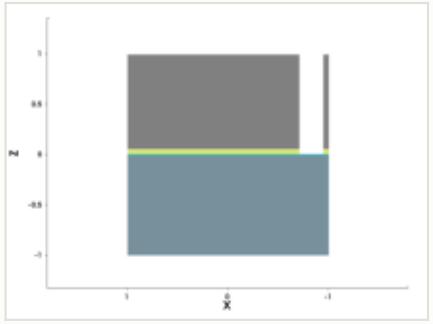


mask for this step

no mask for this step


steps by process area

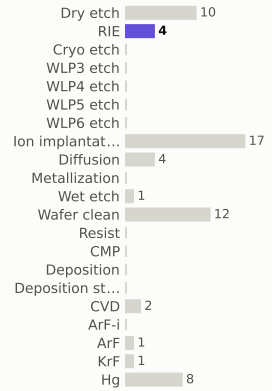

materials deposited (g)



gases emitted (g)

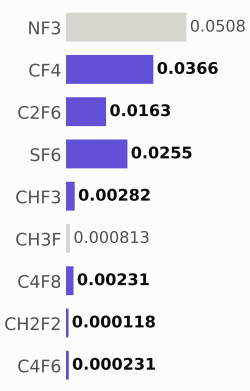


Step #660: RIE

etch_anisotropic · RIE

1.04	62.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

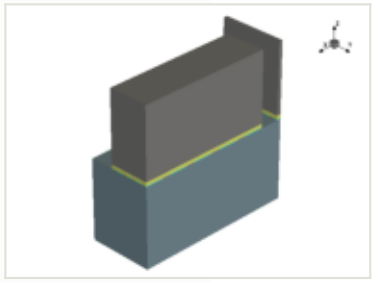






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

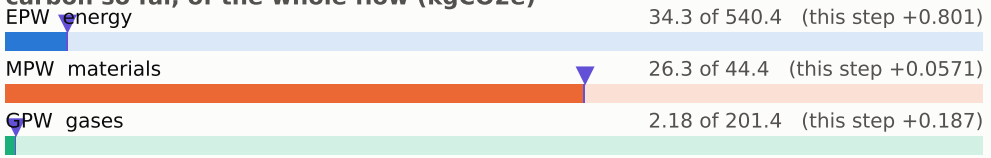


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

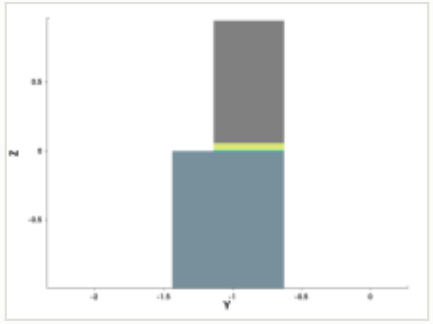


y cut at -1.035 µm

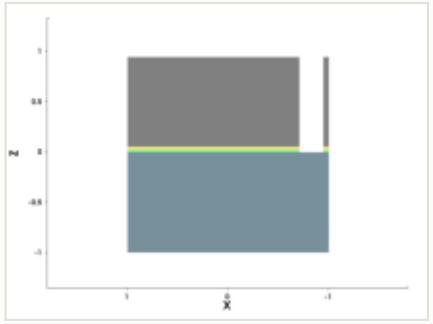

mask for this step

no mask for this step


steps by process area

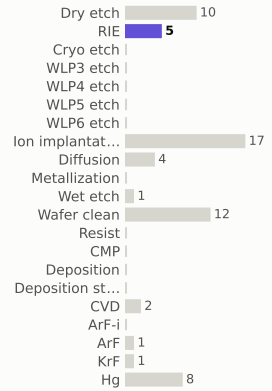

materials deposited (g)



gases emitted (g)

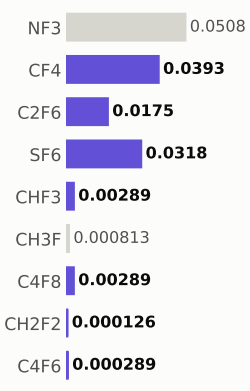


Step #670: RIE

etch_anisotropic · RIE

1.04	63.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

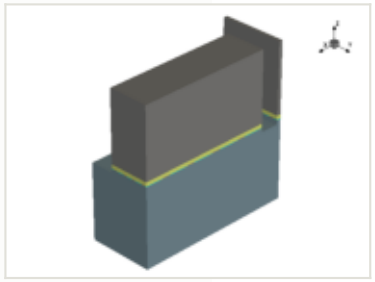






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

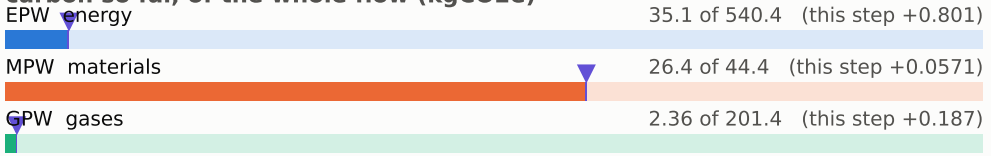


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

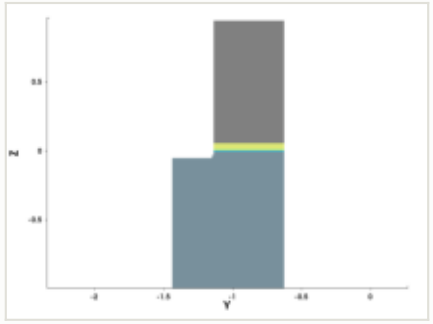


y cut at -1.035 µm

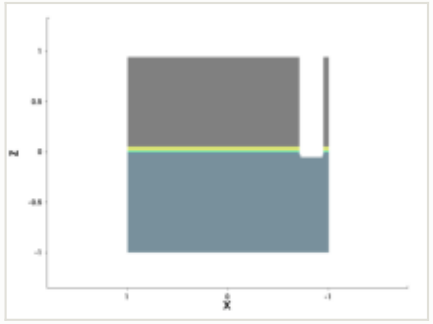

mask for this step

no mask for this step


steps by process area

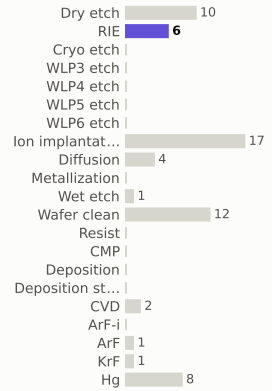

materials deposited (g)



gases emitted (g)

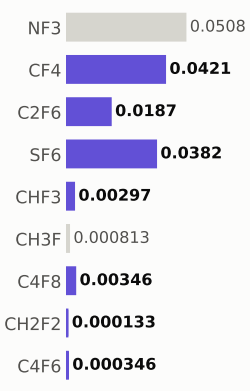


Step #680: RIE

etch_anisotropic · RIE

1.04	64.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

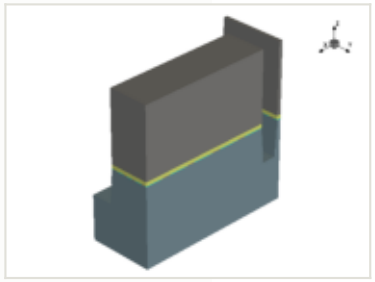






x cut at 0.000 µm

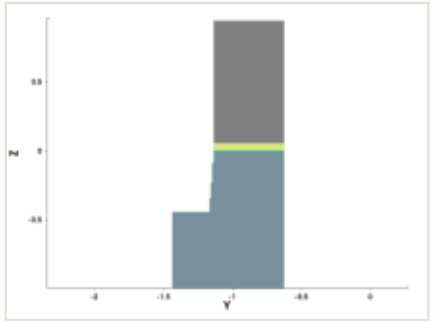

y cut at -1.035 µm

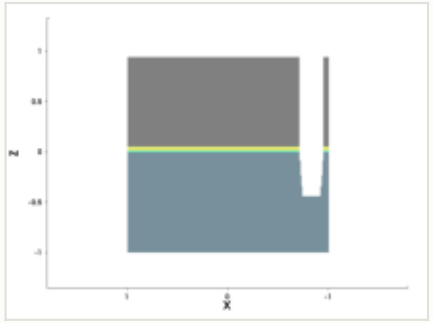

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

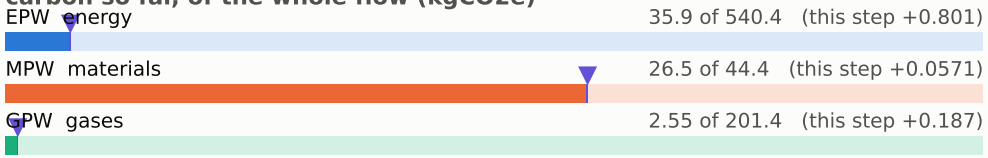


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

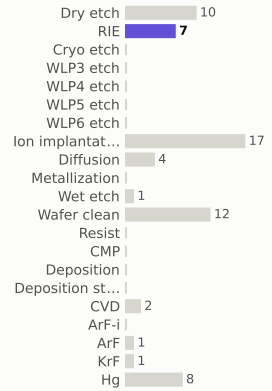

materials deposited (g)



gases emitted (g)

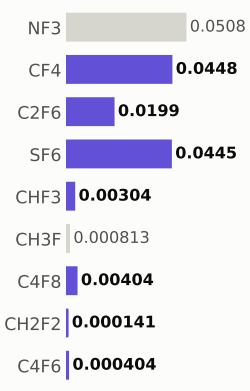


Step #690: Dry_etch

etch_strip · Dry_etch

0.801	65.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

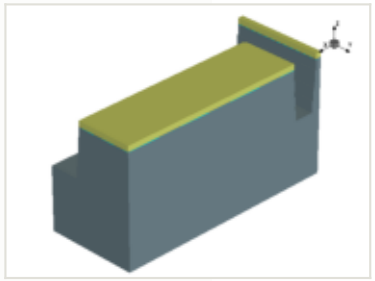

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

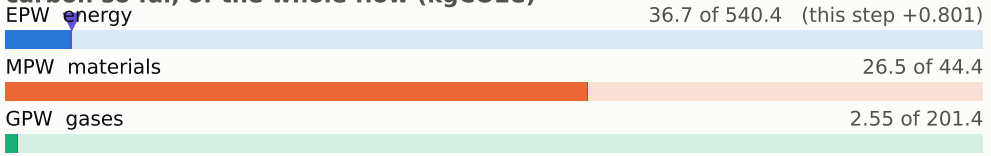


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

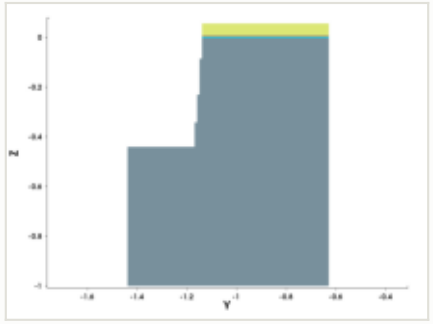


y cut at -1.035 µm

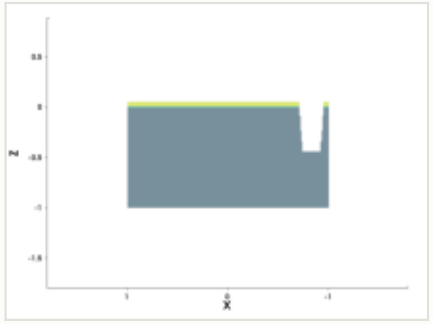

mask for this step

no mask for this step


steps by process area

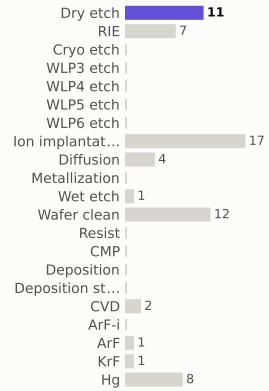

materials deposited (g)



gases emitted (g)

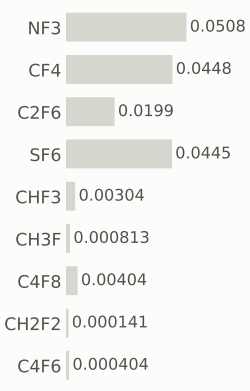


Step #700: Wafer_clean

clean · Wafer_clean

0.169	65.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

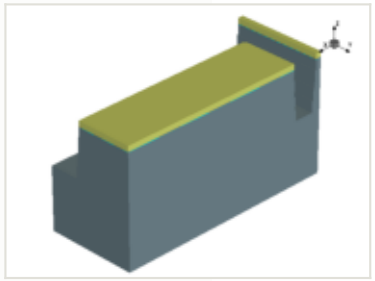






x cut at 0.000 µm

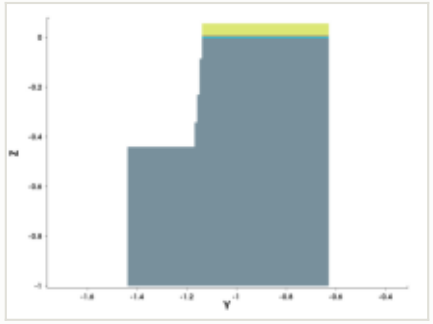

y cut at -1.035 µm

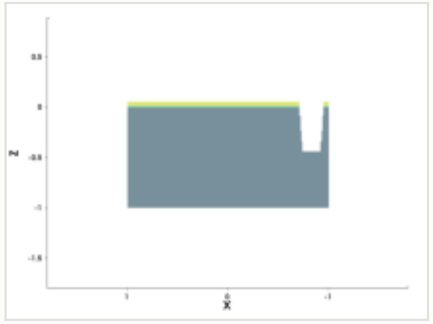

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

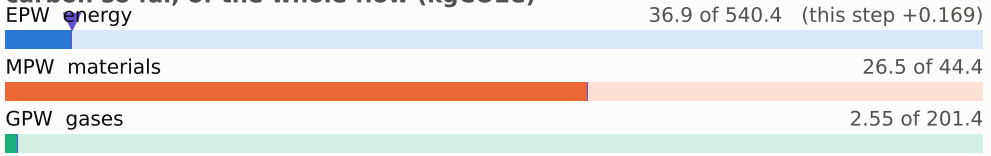


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

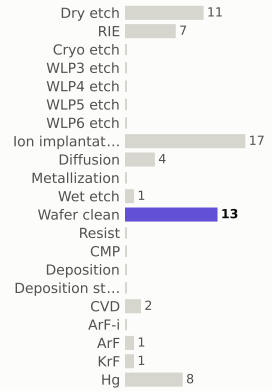

materials deposited (g)



gases emitted (g)

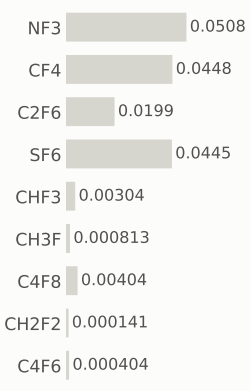


Step #710: Hg


litho_patterning · Hg

0.199	66.1	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

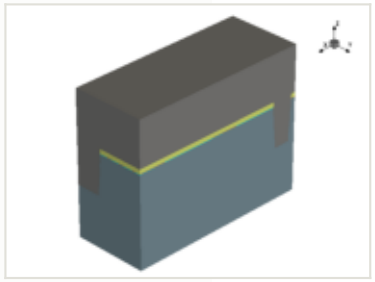

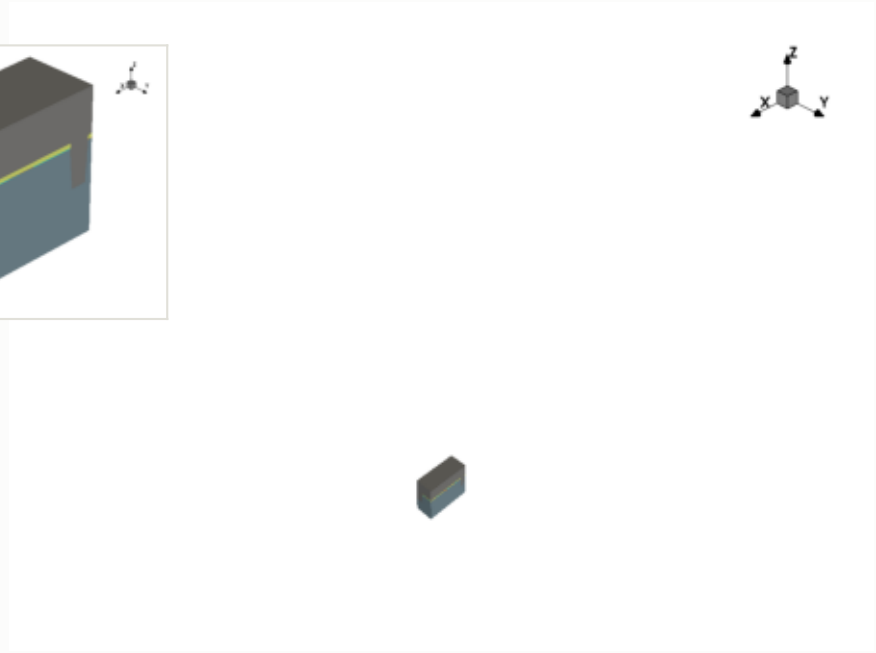


this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

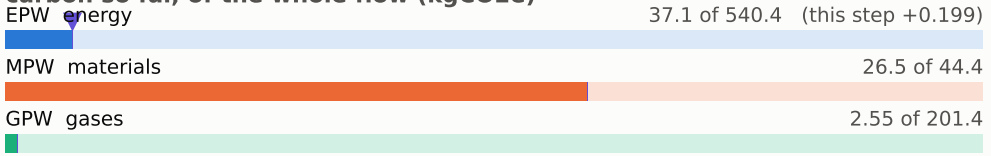


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

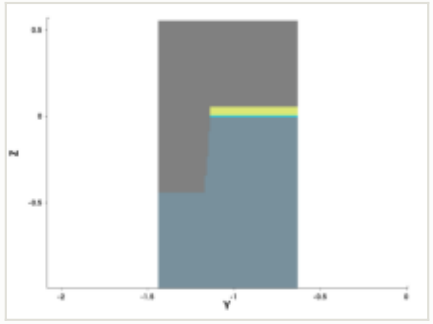


y cut at -1.035 µm

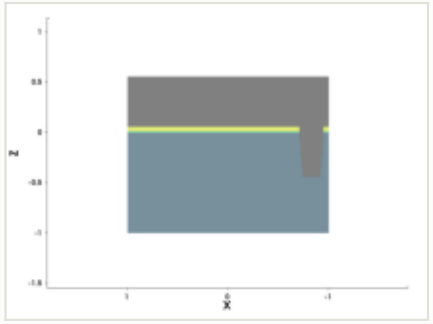


mask: layer 11:0, positive (OASIS)




steps by process area

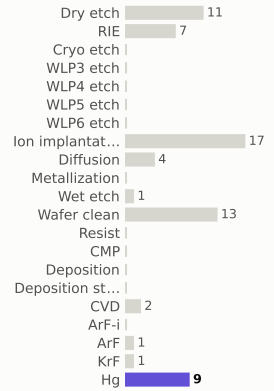

materials deposited (g)



gases emitted (g)

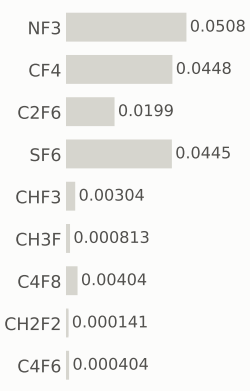


Step #720: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	66.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

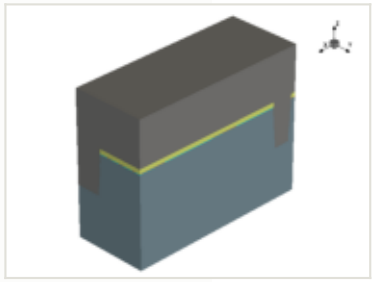






x cut at 0.000 µm

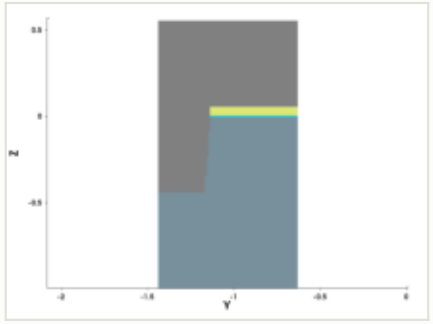

y cut at -1.035 µm

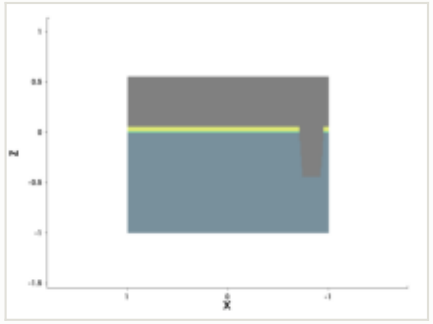

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

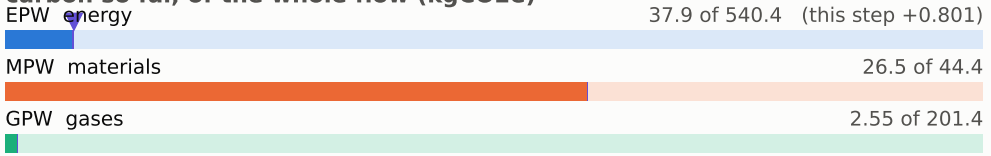


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

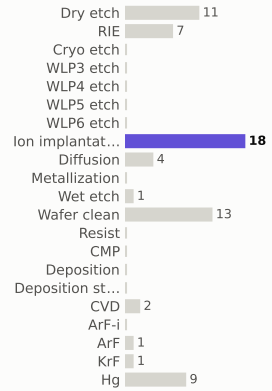

materials deposited (g)



gases emitted (g)

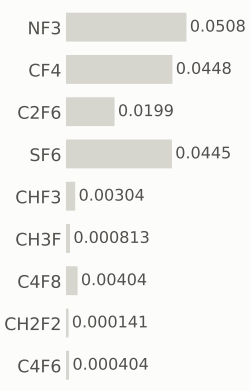


Step #730: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	67.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

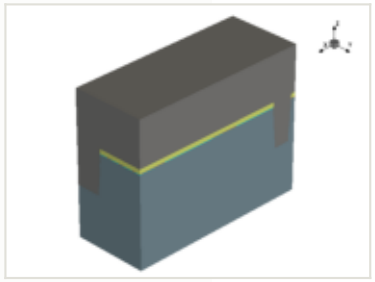






x cut at 0.000 µm

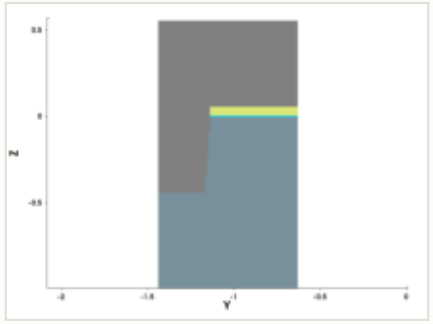

y cut at -1.035 µm

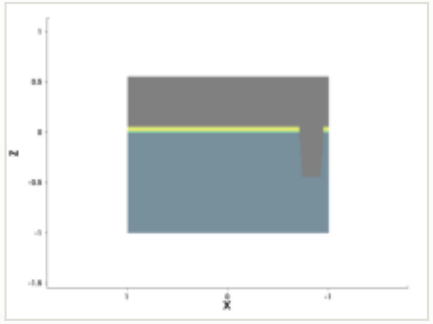

mask for this step


no mask for this step

this step


process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

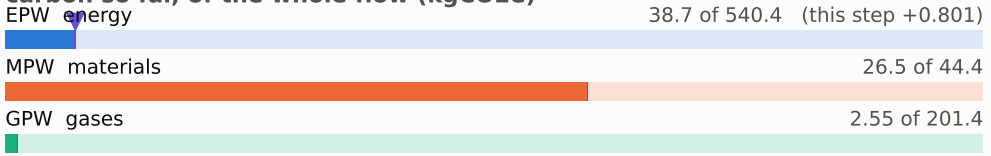


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

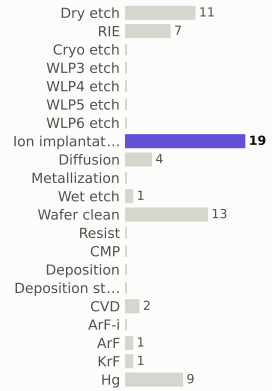

materials deposited (g)



gases emitted (g)

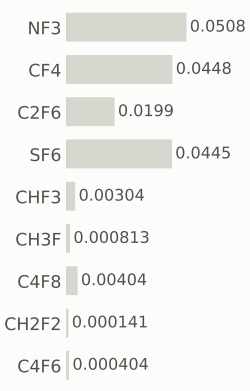


Step #740: Dry_etch

etch_strip · Dry_etch

0.801	68.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

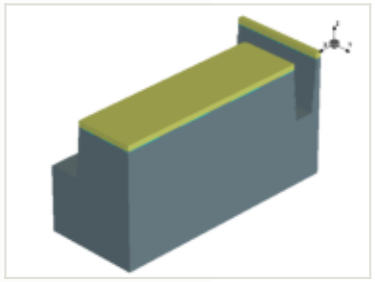


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

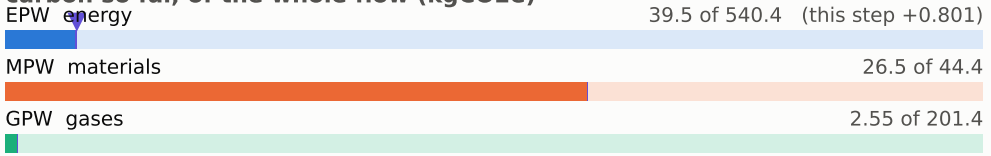


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

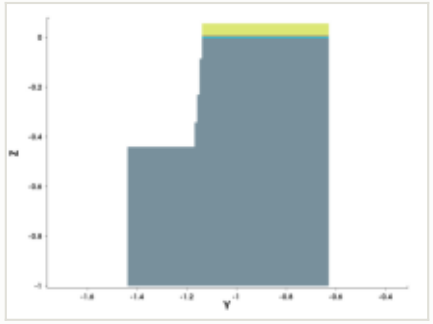


y cut at -1.035 µm

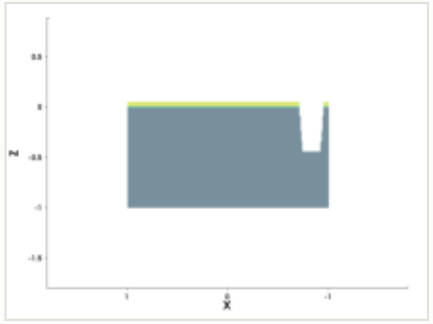

mask for this step

no mask for this step


steps by process area

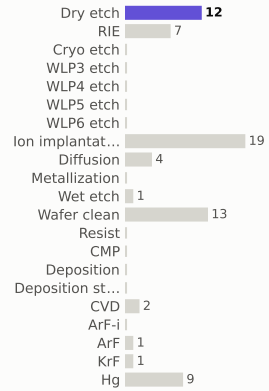

materials deposited (g)



gases emitted (g)

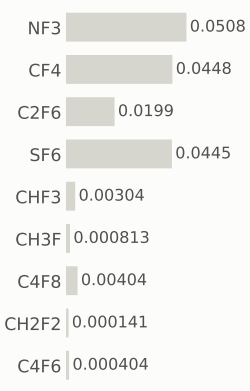


Step #750: Wafer_clean

clean · Wafer_clean

0.169	68.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

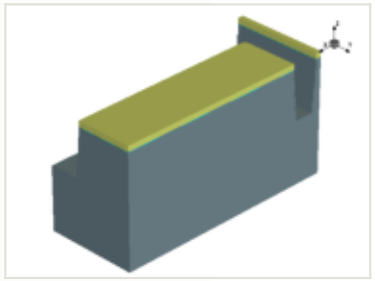






x cut at 0.000 µm

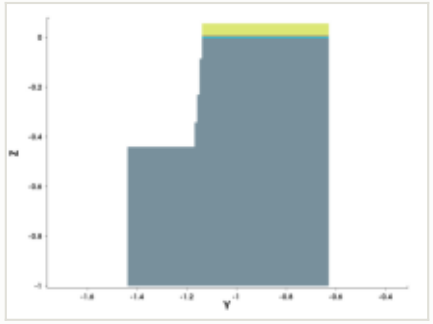

y cut at -1.035 µm

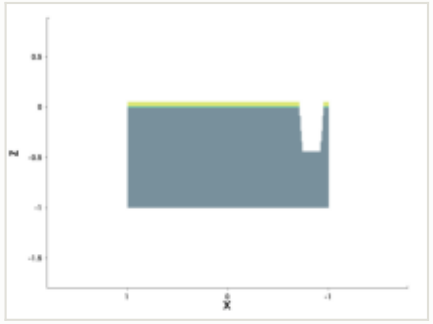

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

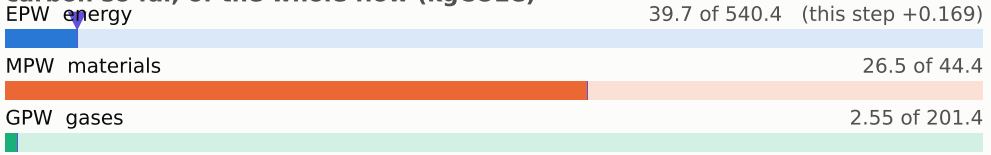

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

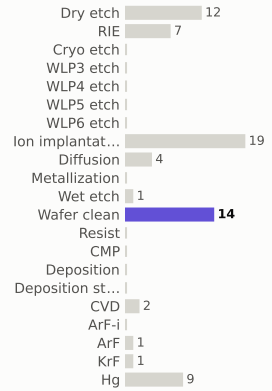

materials deposited (g)



gases emitted (g)

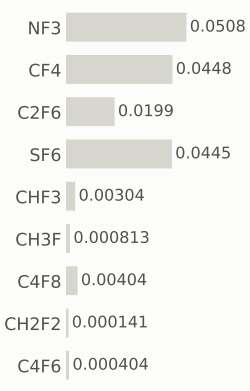


Step #760: Hg


litho_patterning · Hg

0.199	68.9	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

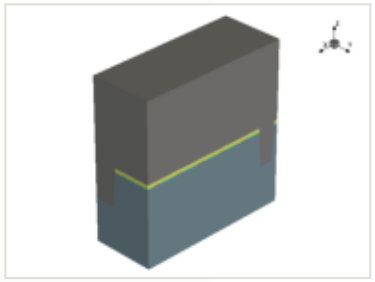

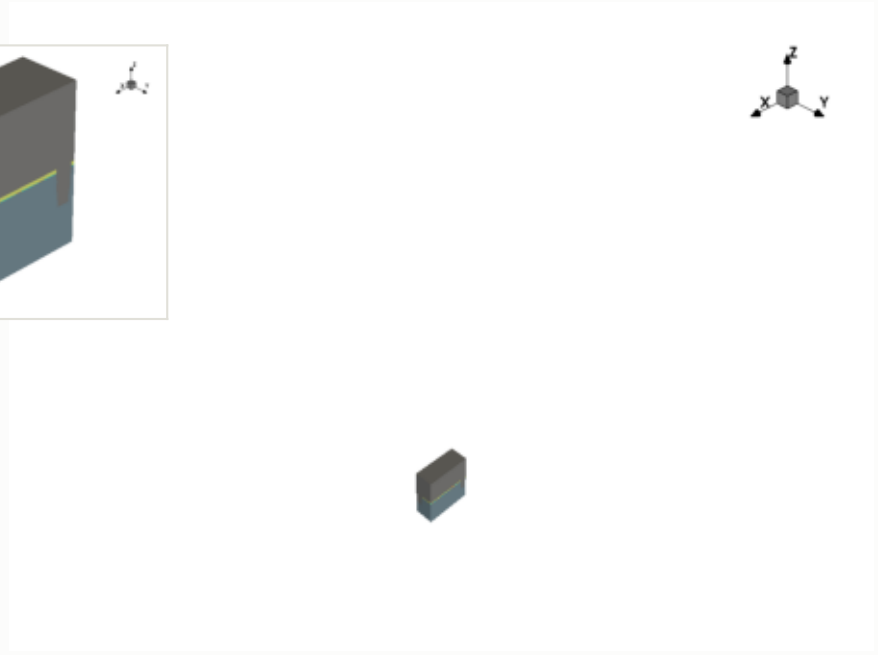


this step

process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

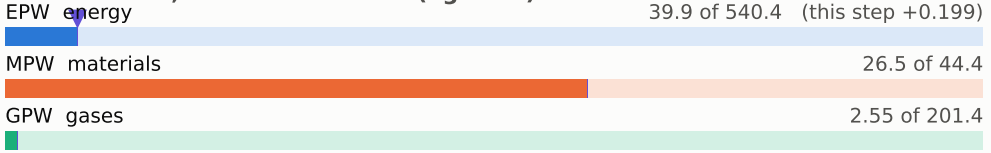


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

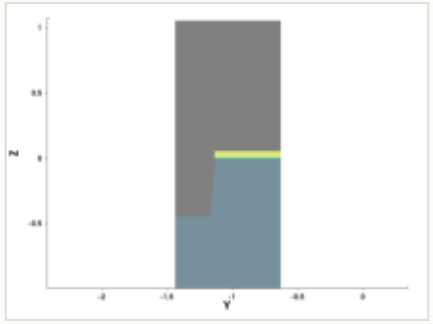


y cut at -1.035 µm

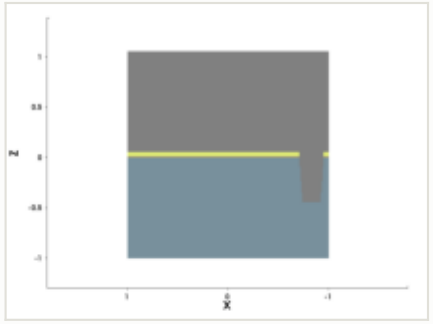


mask: layer 12:0, positive (OASIS)




steps by process area

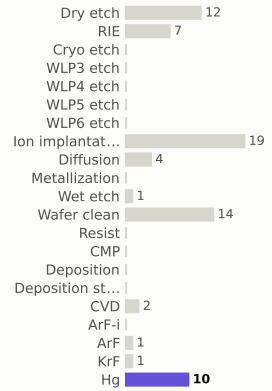

materials deposited (g)



gases emitted (g)

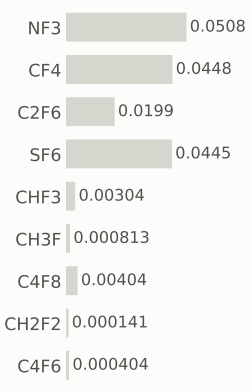


Step #770: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	69.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

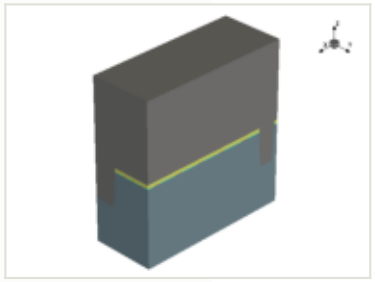






x cut at 0.000 µm

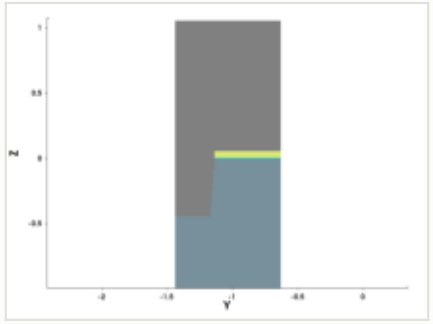

y cut at -1.035 µm

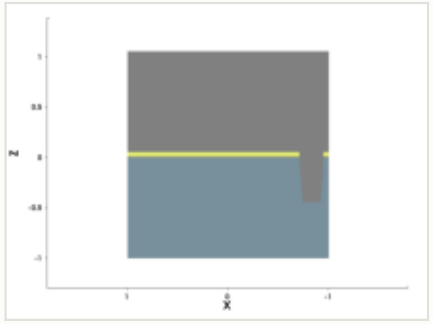

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

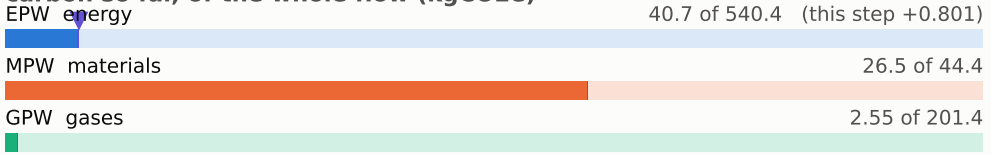

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

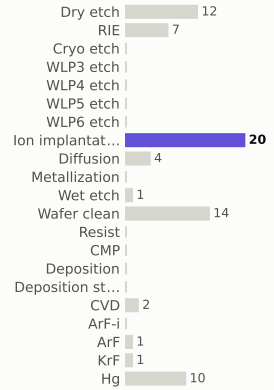

materials deposited (g)



gases emitted (g)

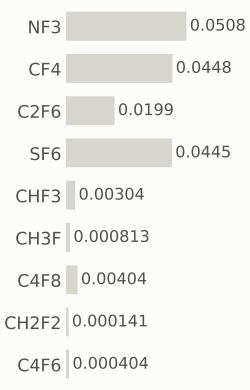


Step #780: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	70.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

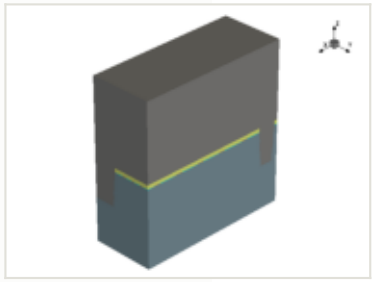






x cut at 0.000 µm

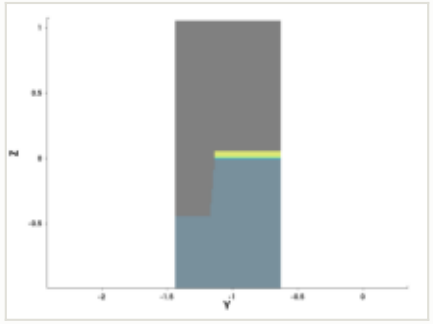

y cut at -1.035 µm

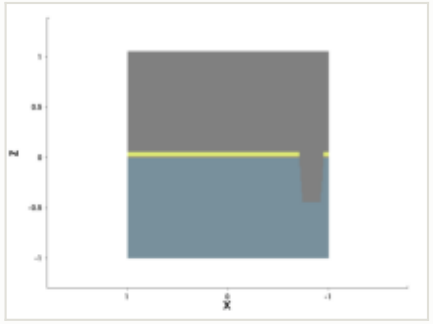

mask for this step


no mask for this step

this step


process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

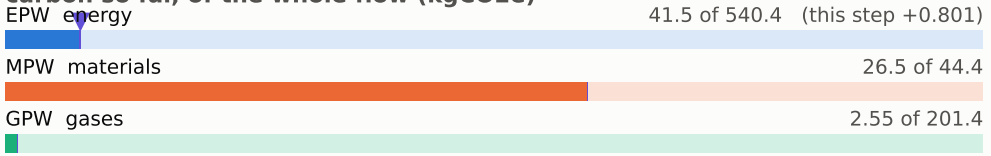

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

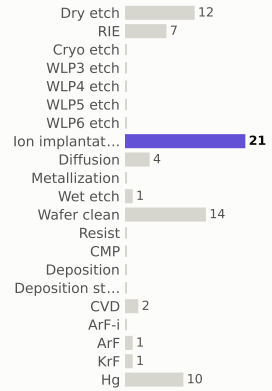

materials deposited (g)



gases emitted (g)

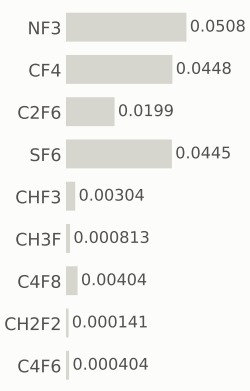


Step #790: Dry_etch

etch_strip · Dry_etch

0.801	71.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

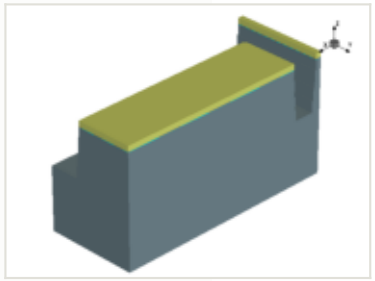

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

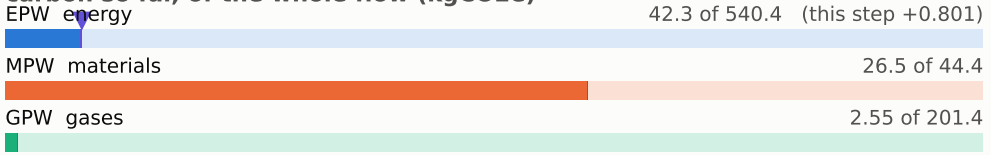


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

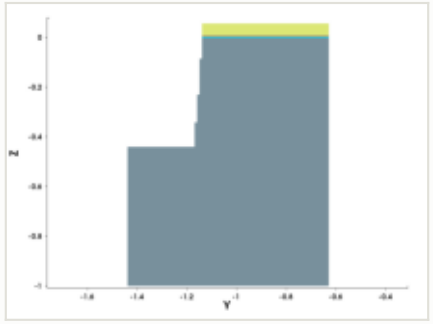


y cut at -1.035 µm

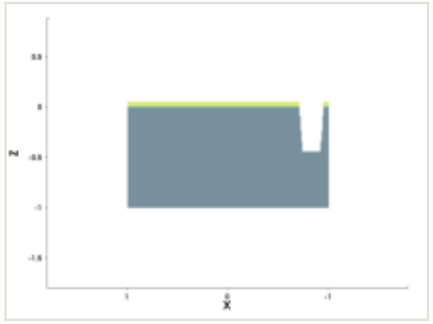

mask for this step

no mask for this step


steps by process area

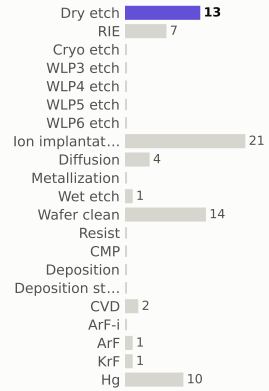

materials deposited (g)



gases emitted (g)

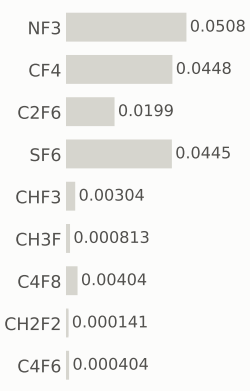


Step #800: Wafer_clean

clean · Wafer_clean

0.169	71.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

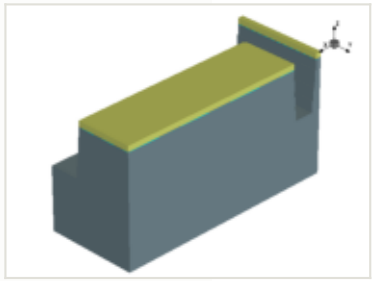






x cut at 0.000 µm

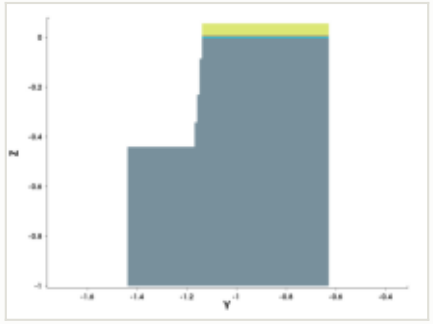

y cut at -1.035 µm

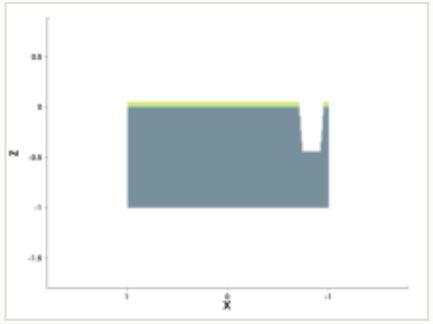

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

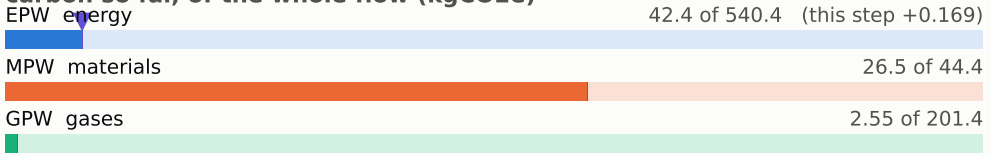


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

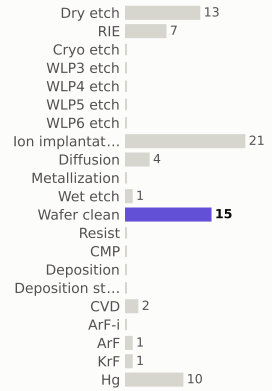

materials deposited (g)



gases emitted (g)

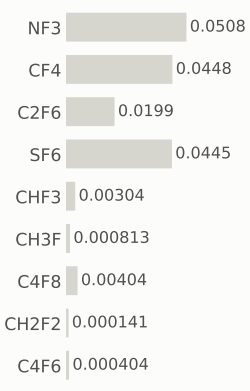


Step #810: Diffusion

depo_isotropic · Diffusion

0.801	72.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

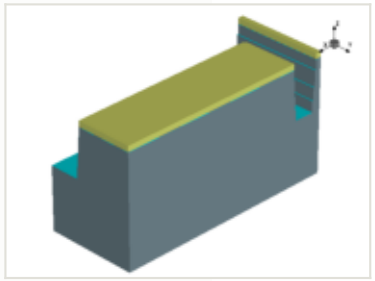






this step


process area	Diffusion
material	—
thickness	0.002 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

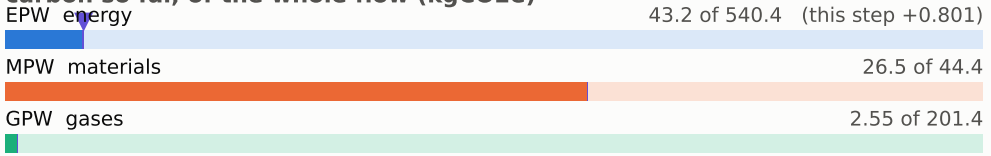


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

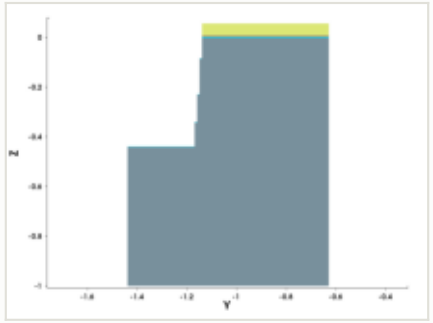


y cut at -1.035 µm

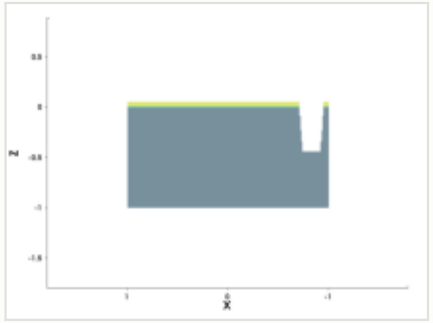


mask for this step

no mask for this step


steps by process area

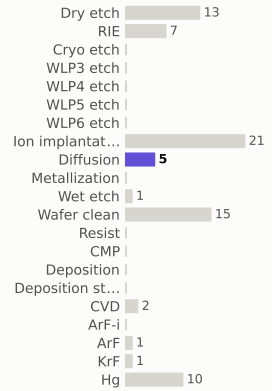

materials deposited (g)



gases emitted (g)

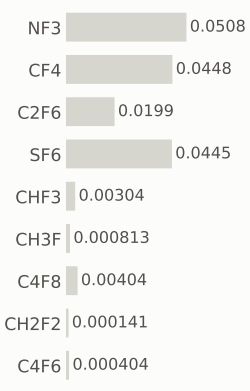


Step #820: Deposition


depo_isotropic · Deposition

0.656	72.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

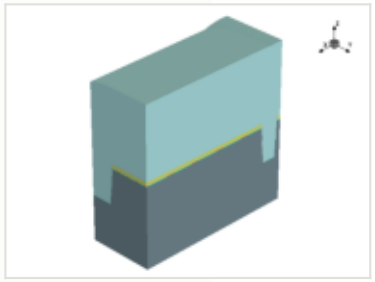

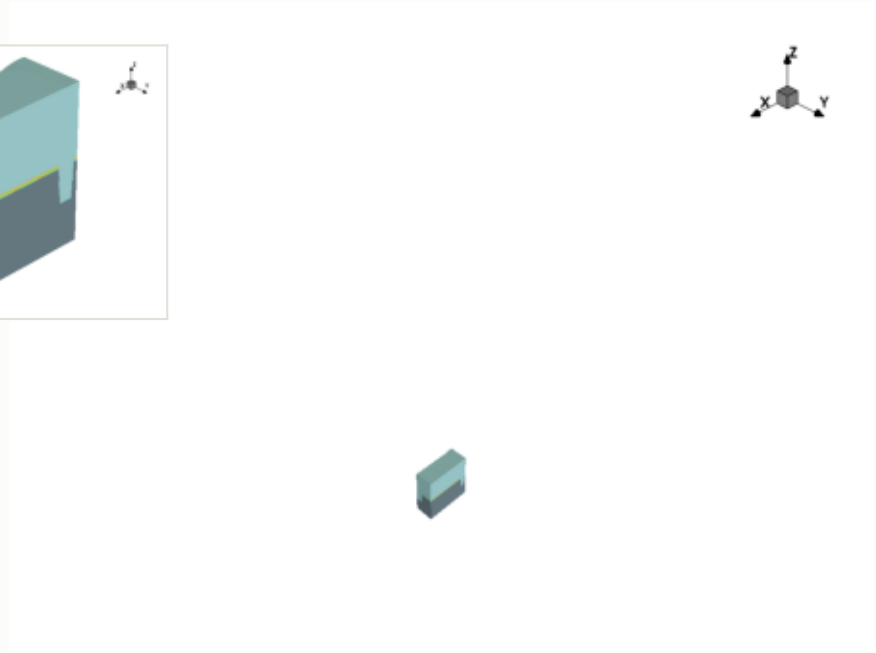


this step

process area	Deposition
material	—
thickness	0.9 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

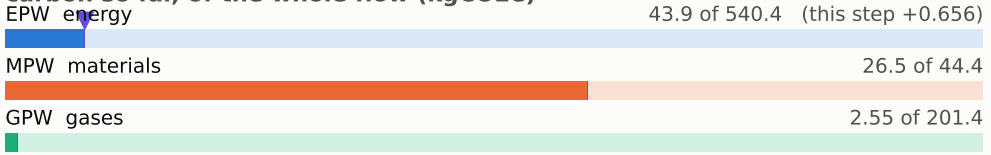


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

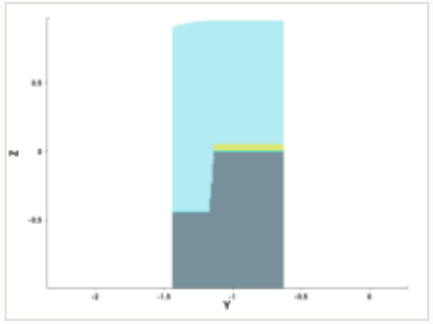


y cut at -1.035 µm

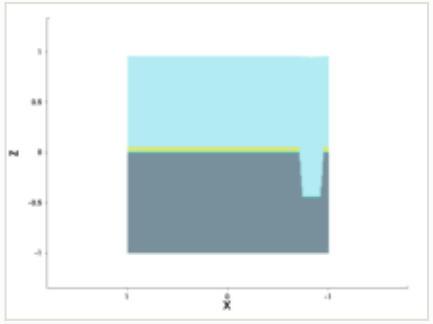

mask for this step

no mask for this step


steps by process area

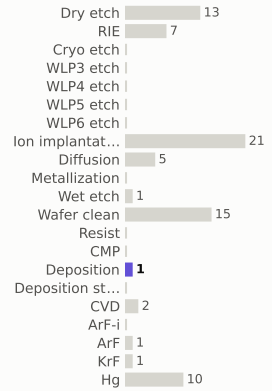

materials deposited (g)



gases emitted (g)

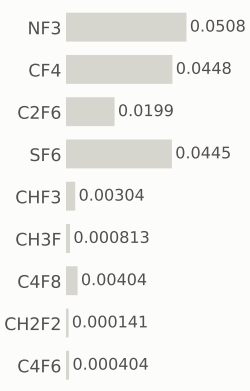


Step #830: Diffusion

anneal · Diffusion

0.801	73.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

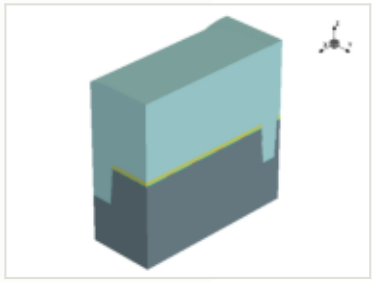






x cut at 0.000 µm

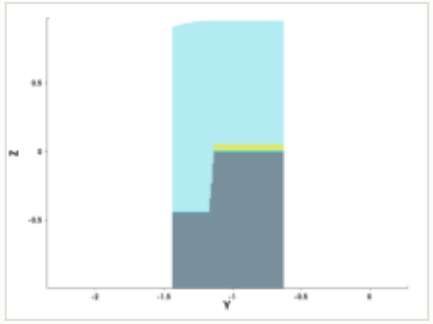

y cut at -1.035 µm

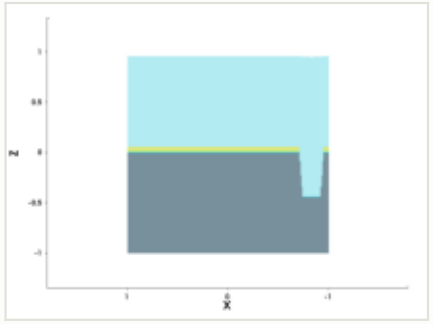

mask for this step


no mask for this step

this step

process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp


carbon so far, of the whole flow (kgCO2e)

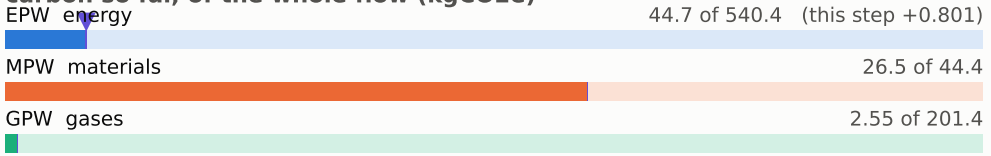


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

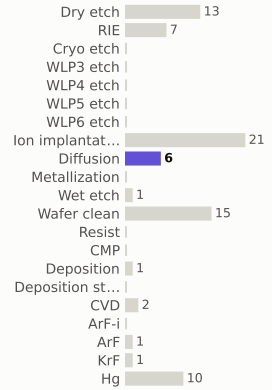

materials deposited (g)



gases emitted (g)

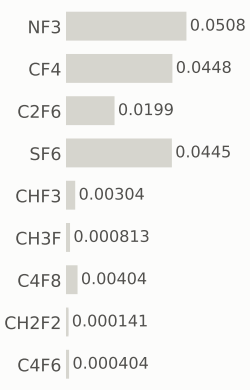


Step #840: CMP


etch_cmp · CMP

0.169	73.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

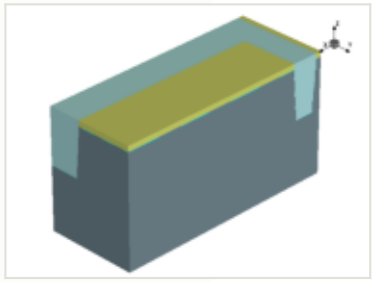

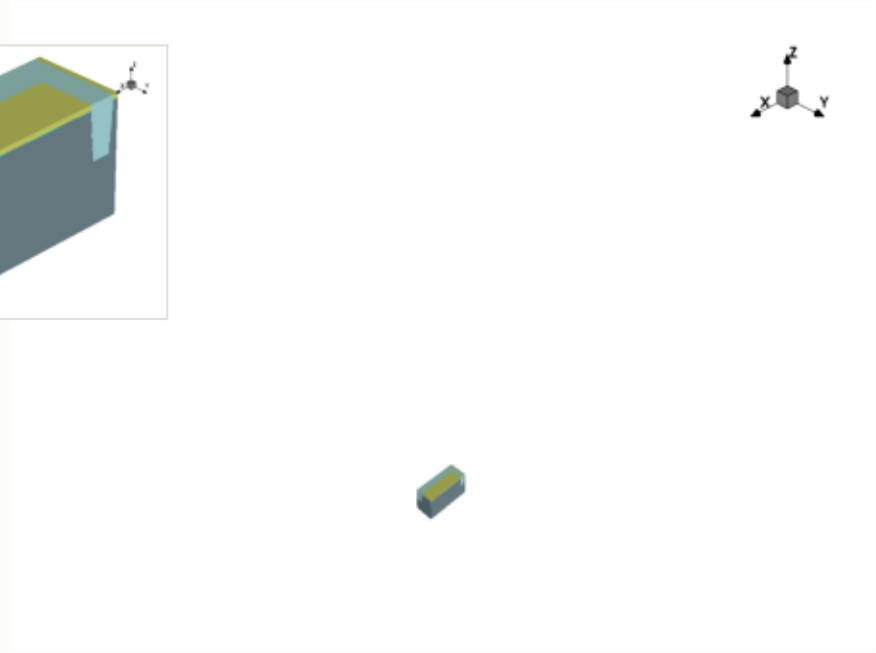


this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

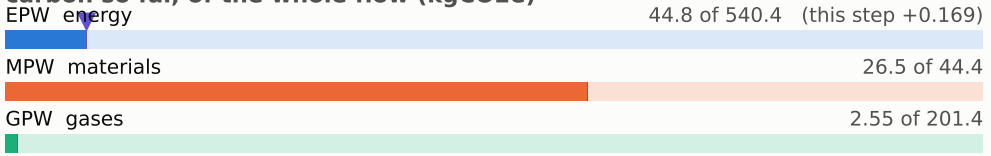


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

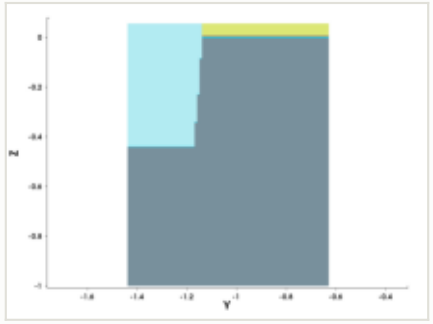


y cut at -1.035 µm

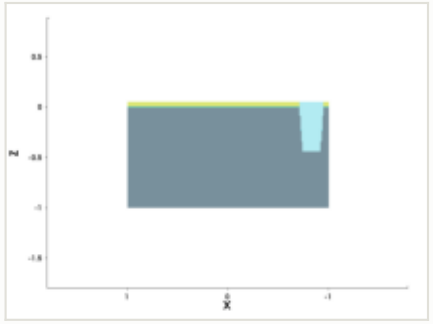

mask for this step

no mask for this step


steps by process area

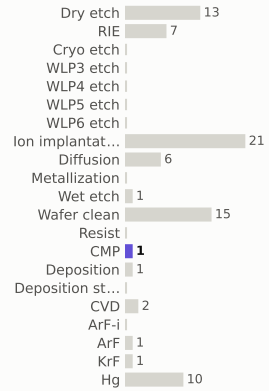

materials deposited (g)



gases emitted (g)

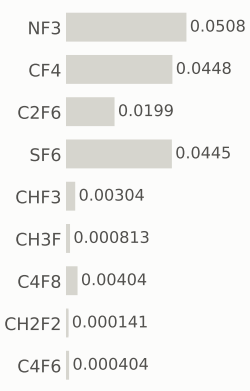


Step #850: Wet_etch

etch_anisotropic · Wet_etch

0.169	74	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

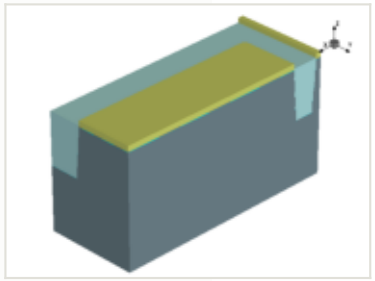






this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

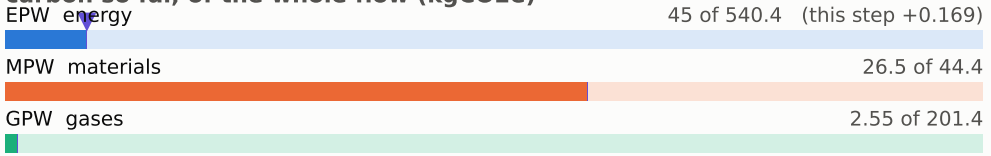


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

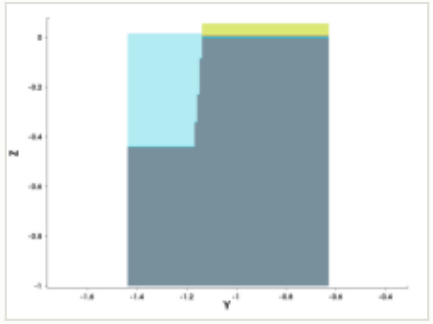


y cut at -1.035 µm

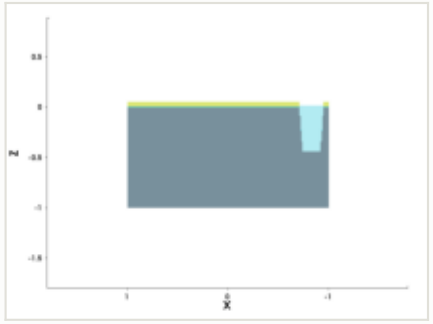

mask for this step

no mask for this step


steps by process area

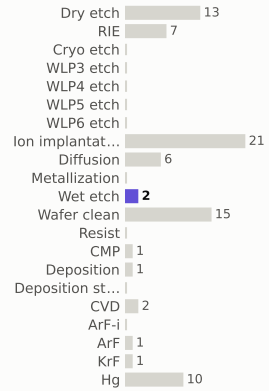

materials deposited (g)



gases emitted (g)

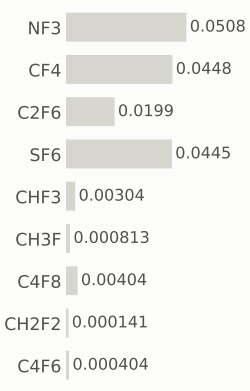


Step #860: Wet_etch

etch_isotropic · Wet_etch

0.169	74.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

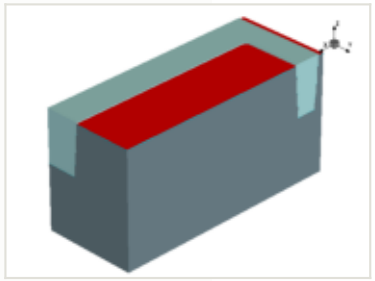






this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

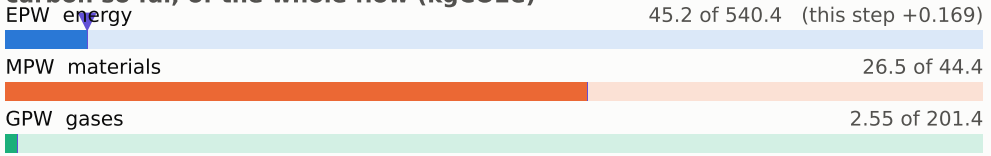


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

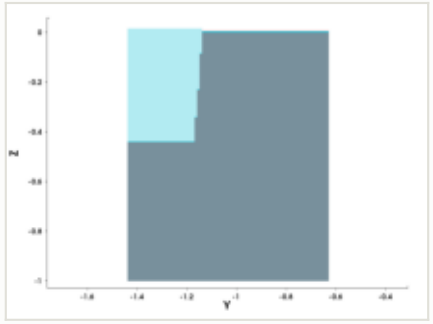


y cut at -1.035 µm

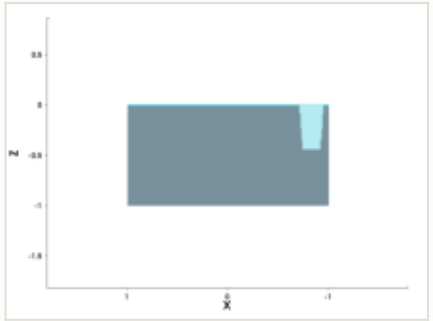

mask for this step

no mask for this step


steps by process area

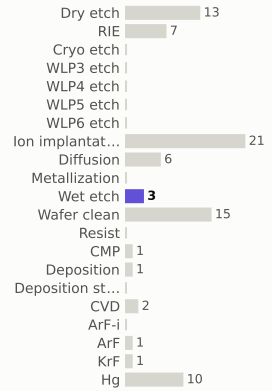

materials deposited (g)



gases emitted (g)

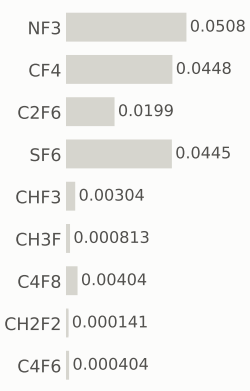


Step #870: Wafer_clean

clean · Wafer_clean

0.169	74.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

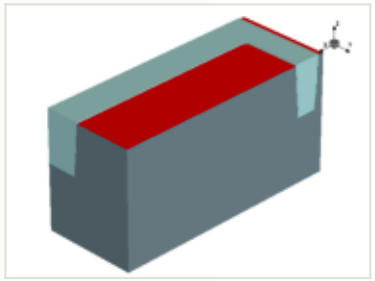






x cut at 0.000 µm

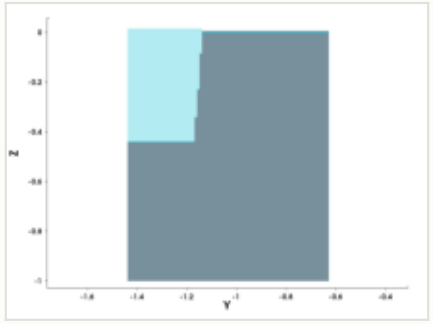

y cut at -1.035 µm

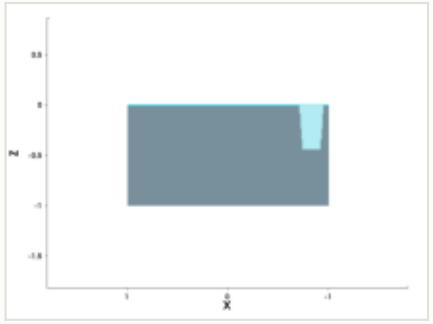

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

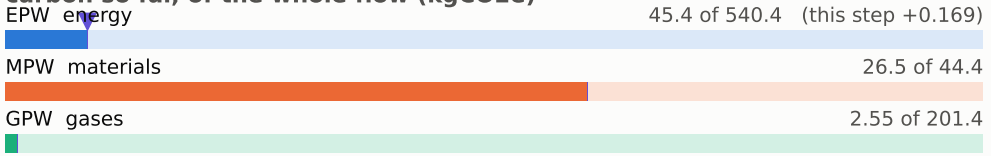


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

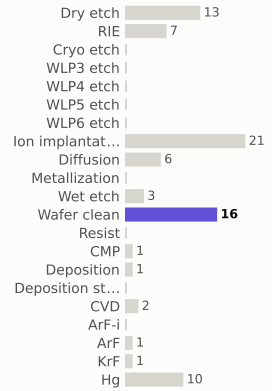

materials deposited (g)



gases emitted (g)

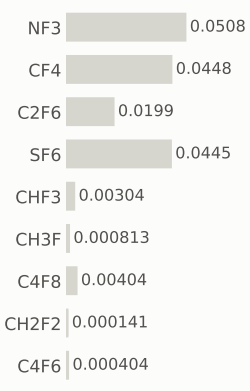


Step #890: CVD


depo_isotropic · CVD

1.31	75.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

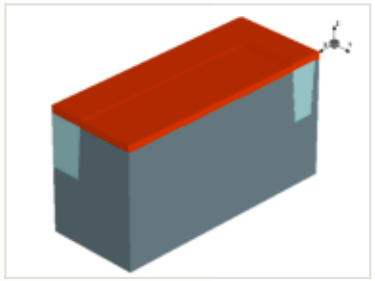

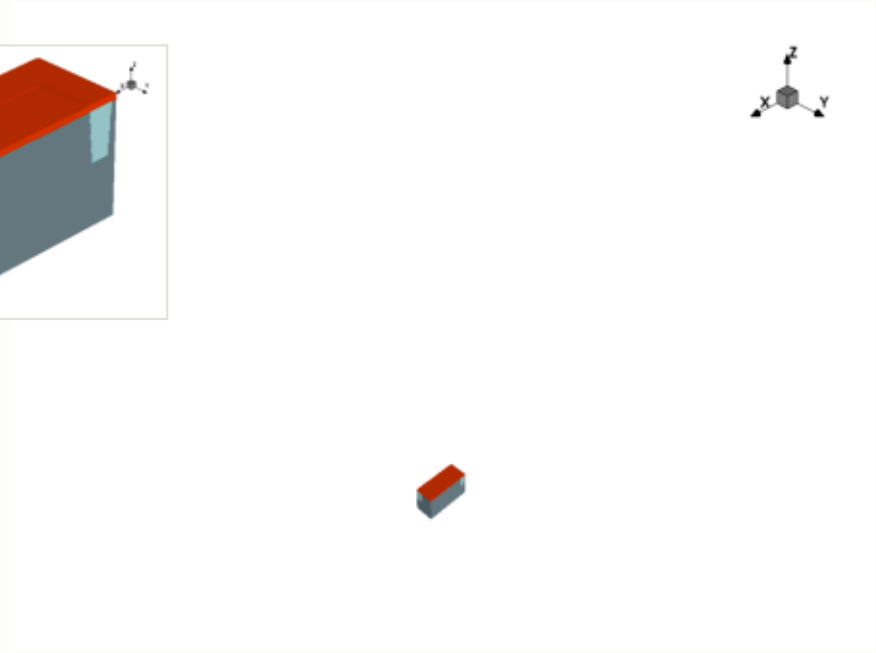


this step

process area	CVD
material	—
thickness	0.063 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

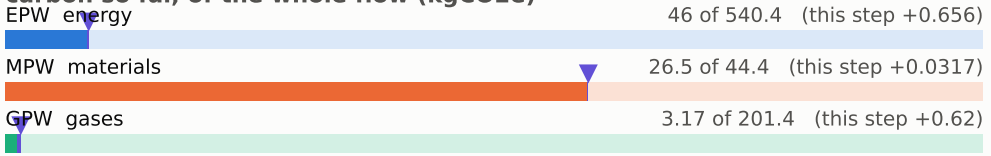


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

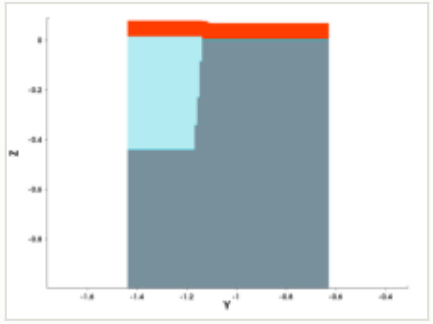


y cut at -1.035 µm

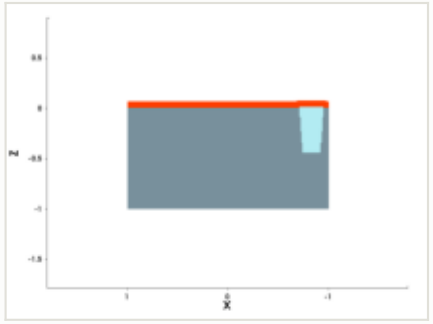

mask for this step

no mask for this step


steps by process area

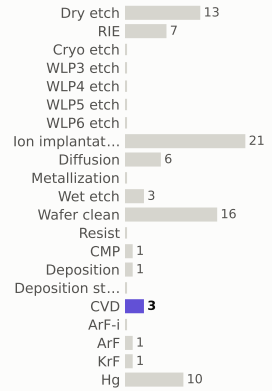

materials deposited (g)



gases emitted (g)

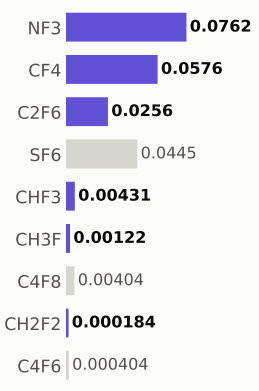


Step #900: Metallization


depo_isotropic · Metallization

1.2	76.9	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

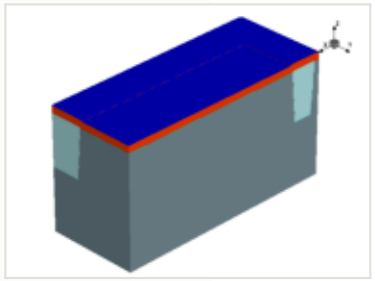

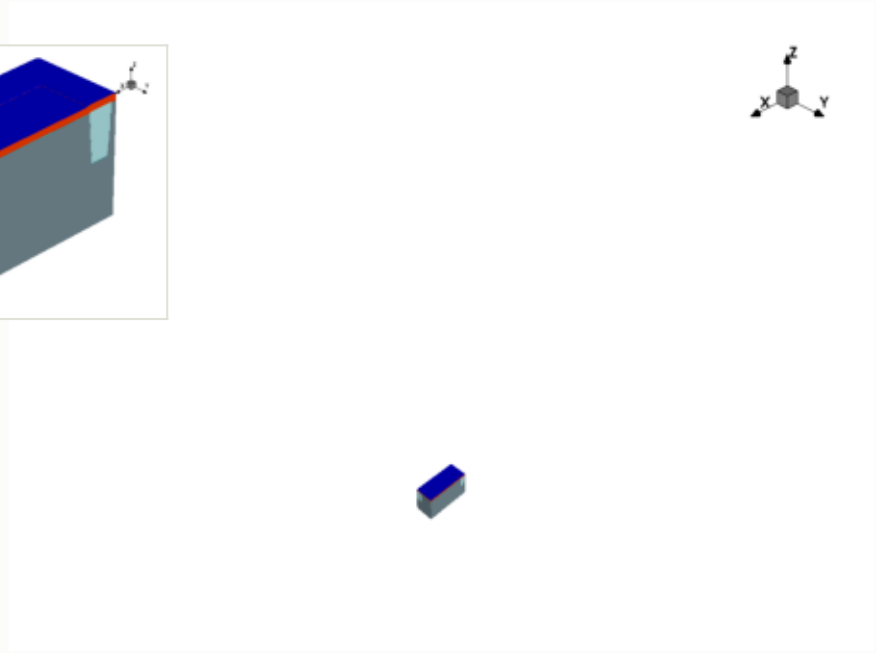


this step

process area	Metallization
material	Ti
thickness	0.003 µm
material GWP	47.6334 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	4.55e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

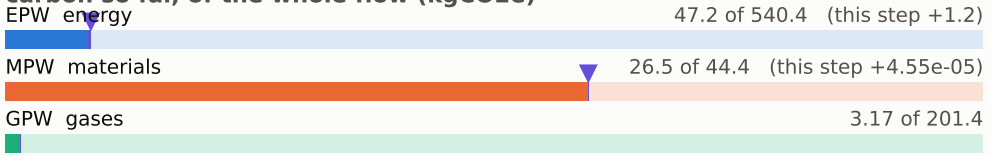


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

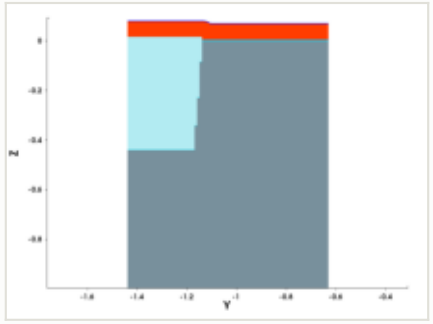


y cut at -1.035 µm

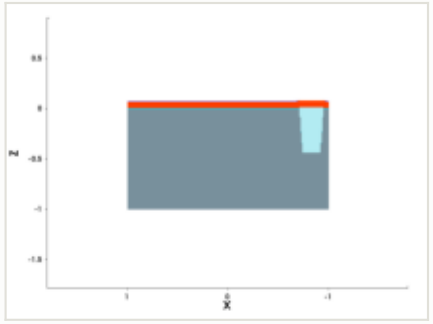


mask for this step

no mask for this step


steps by process area

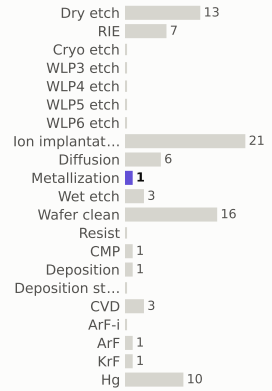

materials deposited (g)

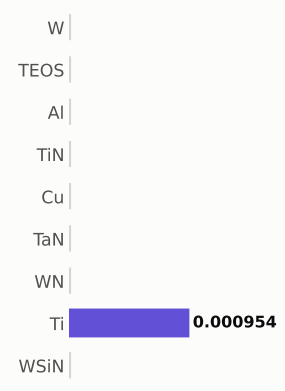

gases emitted (g)

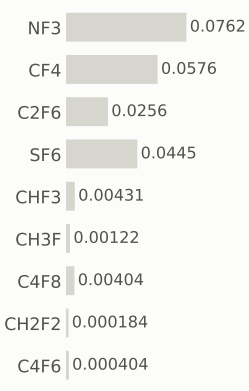


Step #910: Deposition


depo_isotropic · Deposition

0.657	77.5	0.084%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

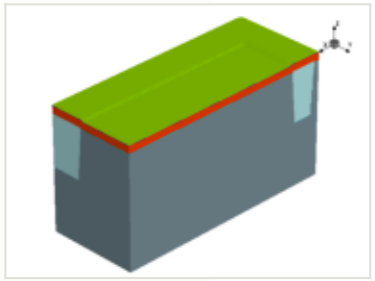

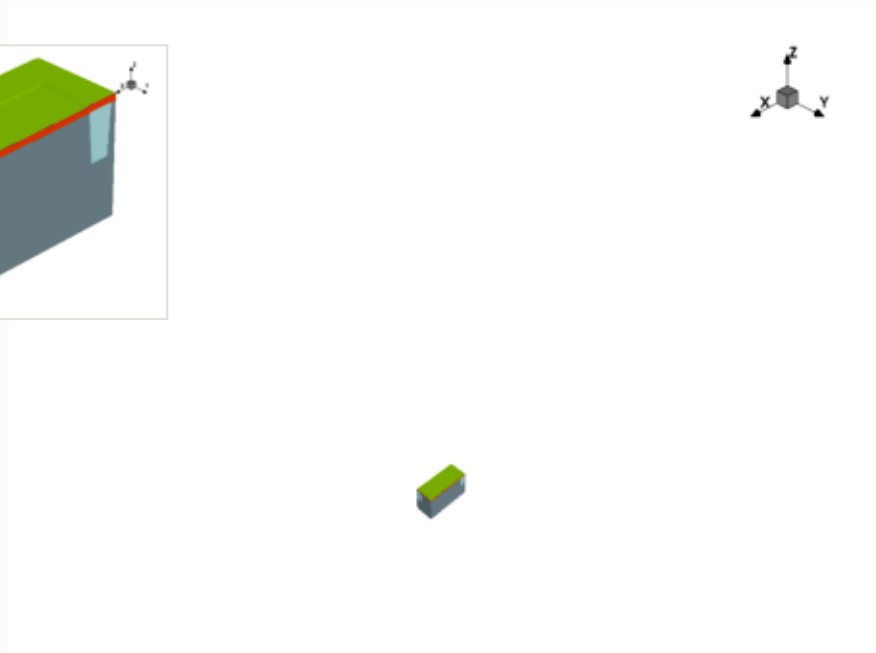


this step

process area	Deposition
material	WN
thickness	0.006 µm
material GWP	76.8289 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.00058 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.657 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

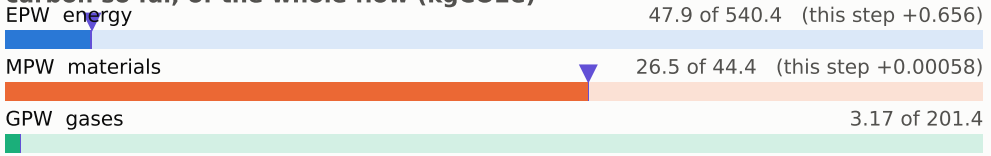


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

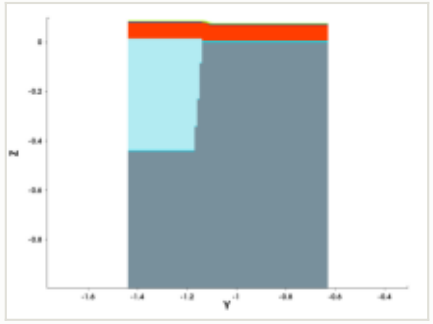


y cut at -1.035 µm

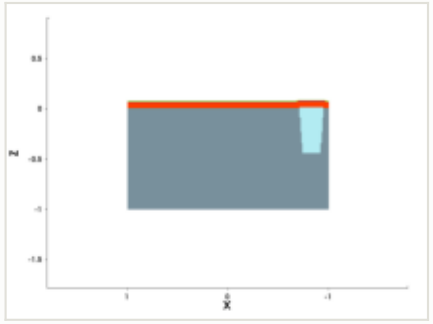


mask for this step

no mask for this step


steps by process area

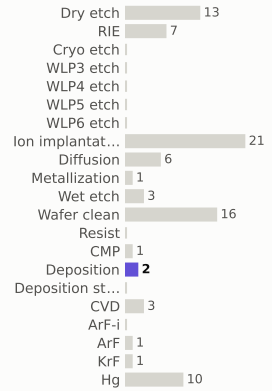

materials deposited (g)

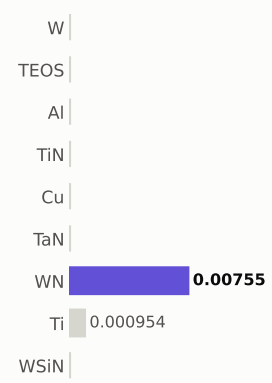

gases emitted (g)

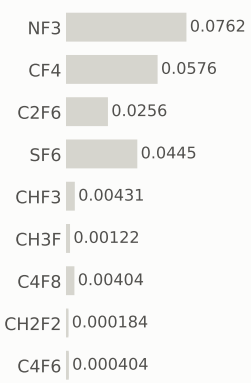


Step #920: Deposition


depo_isotropic · Deposition

0.656	78.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

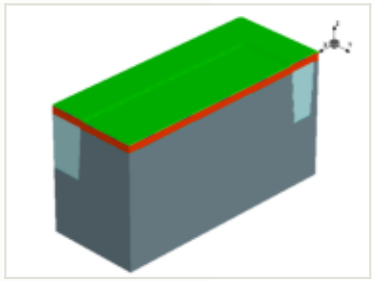

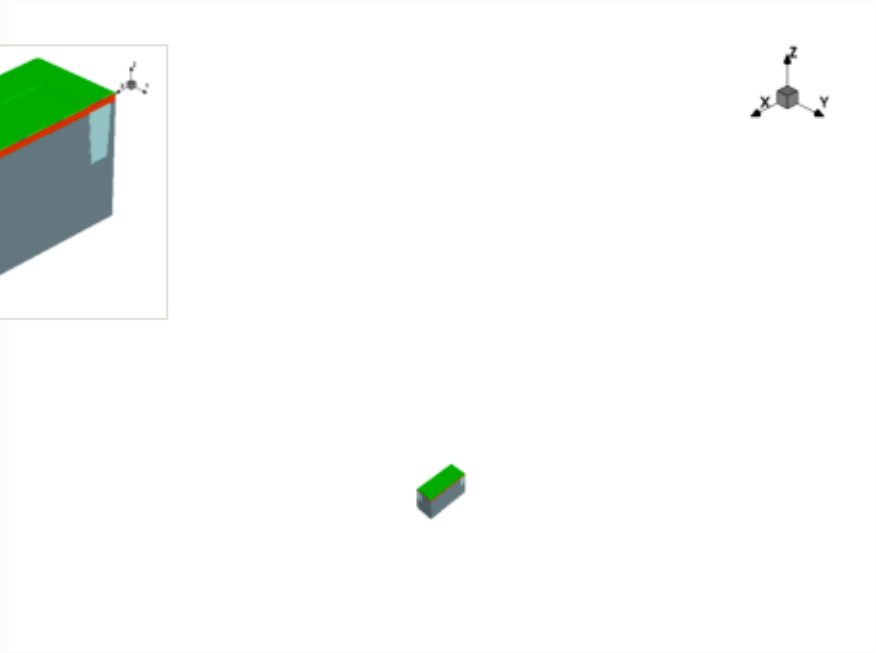


this step

process area	Deposition
material	WSiN
thickness	0.003 µm
material GWP	73.2252 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.00025 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

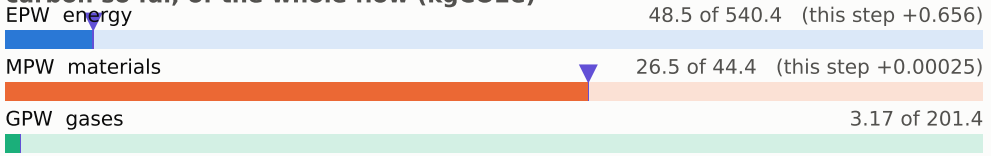


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

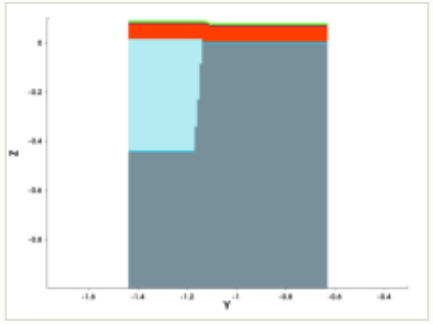


y cut at -1.035 µm

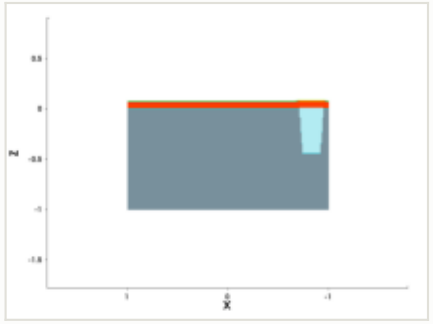


mask for this step

no mask for this step


steps by process area

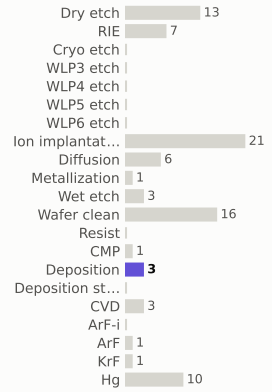

materials deposited (g)

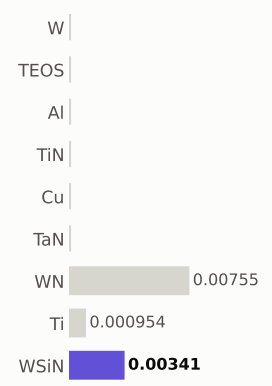

gases emitted (g)

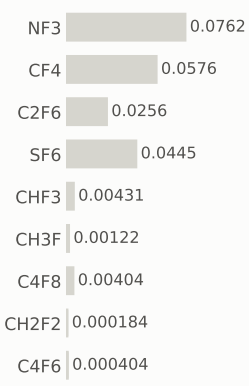


Step #930: Metallization

depo_isotropic · Metallization

1.21	79.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

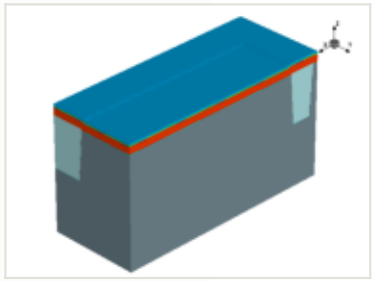






x cut at 0.000 µm

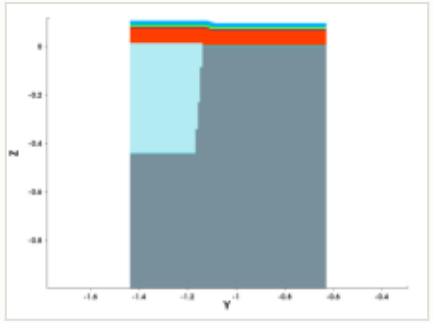

y cut at -1.035 µm

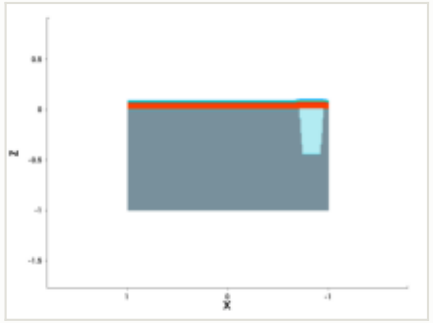

mask for this step


no mask for this step

this step


process area	Metallization
material	W
thickness	0.017 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00176 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

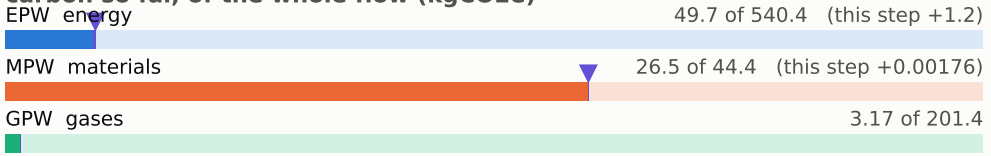


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

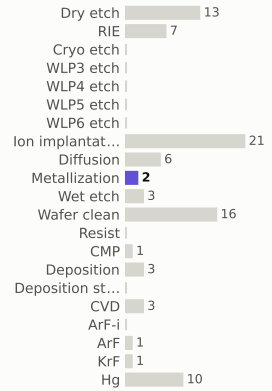

materials deposited (g)

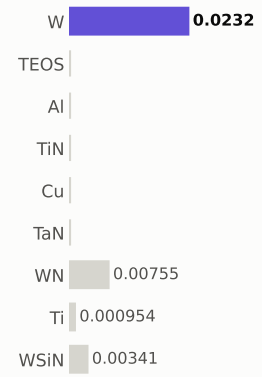

gases emitted (g)

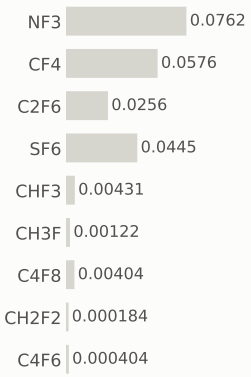


Step #940: CVD


depo_isotropic · CVD

1.31	80.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

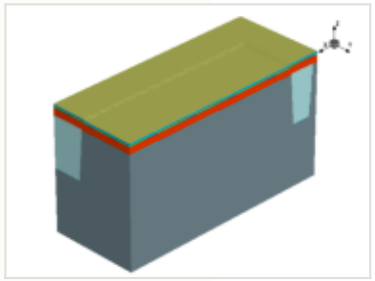

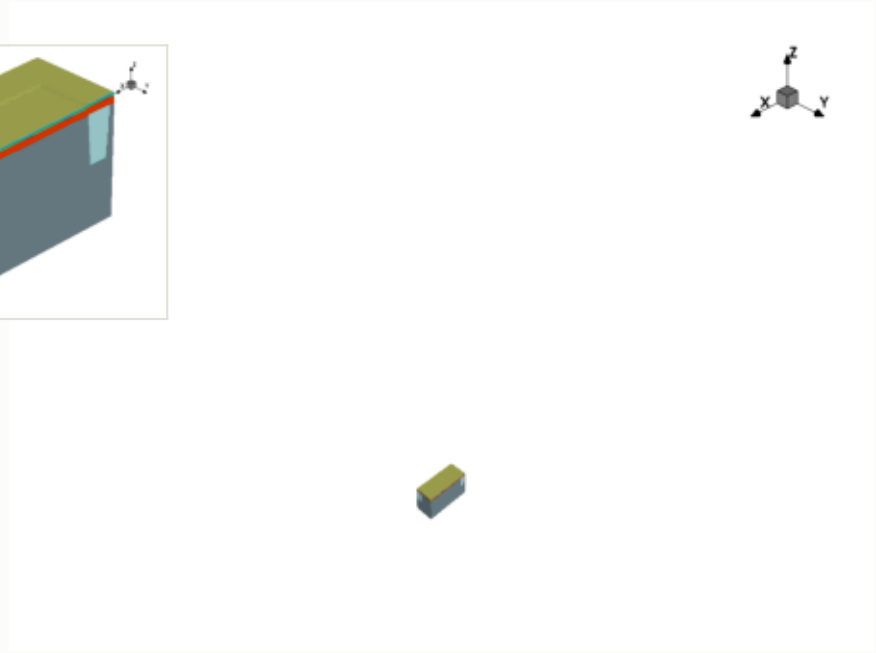


this step

process area	CVD
material	—
thickness	0.003 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

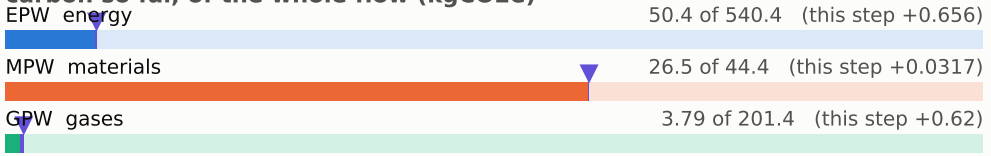


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

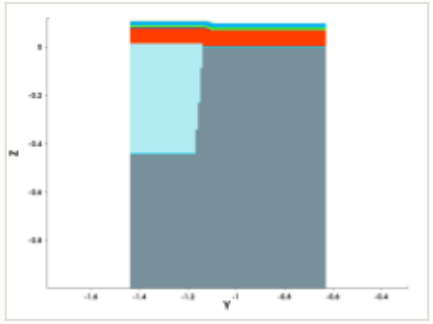


y cut at -1.035 µm

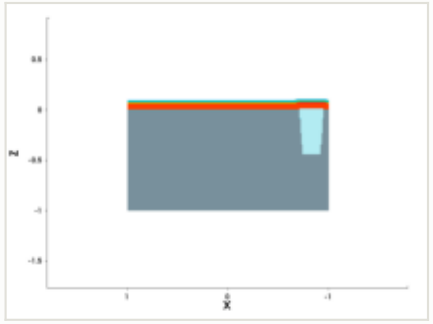


mask for this step

no mask for this step


steps by process area

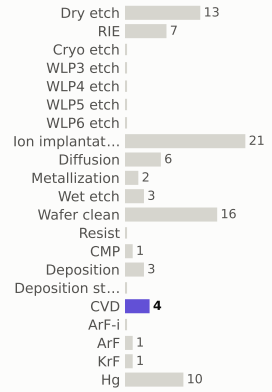

materials deposited (g)

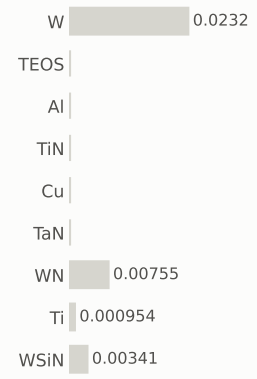

gases emitted (g)




Step #950: CVD

depo_isotropic · CVD

1.31	82	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

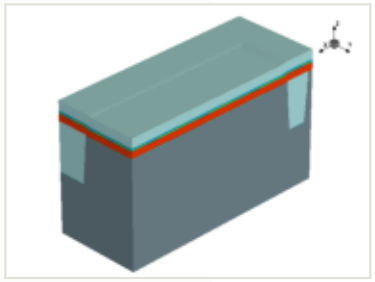






x cut at 0.000 µm

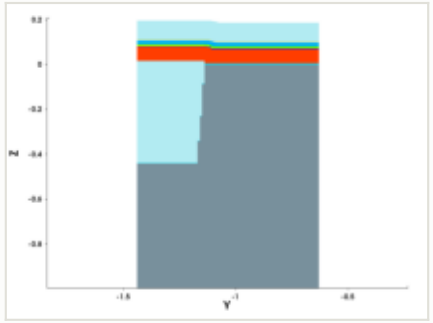

y cut at -1.035 µm

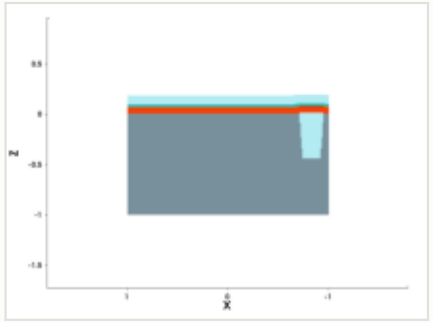

mask for this step


no mask for this step

this step

process area	CVD
material	—
thickness	0.085 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

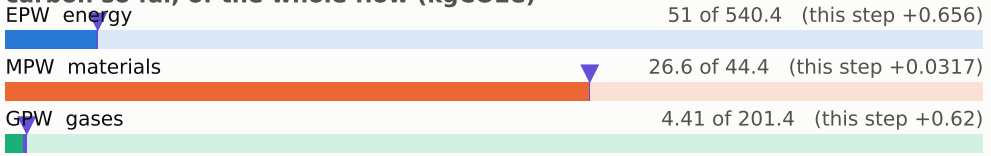


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

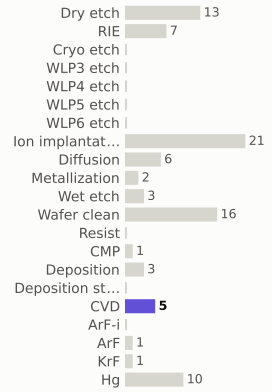

materials deposited (g)

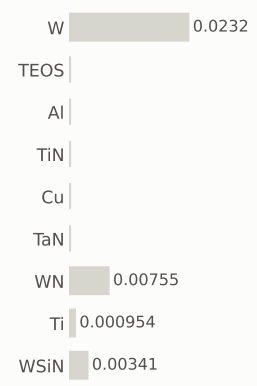

gases emitted (g)

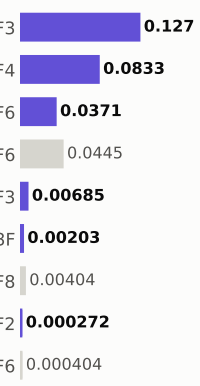


Step #960: KrF


litho_patterning · KrF

0.199	82.2	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

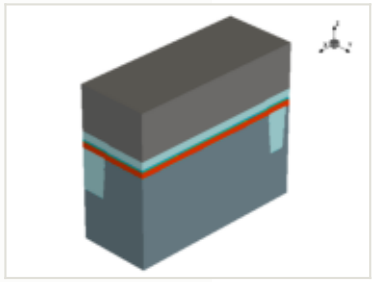

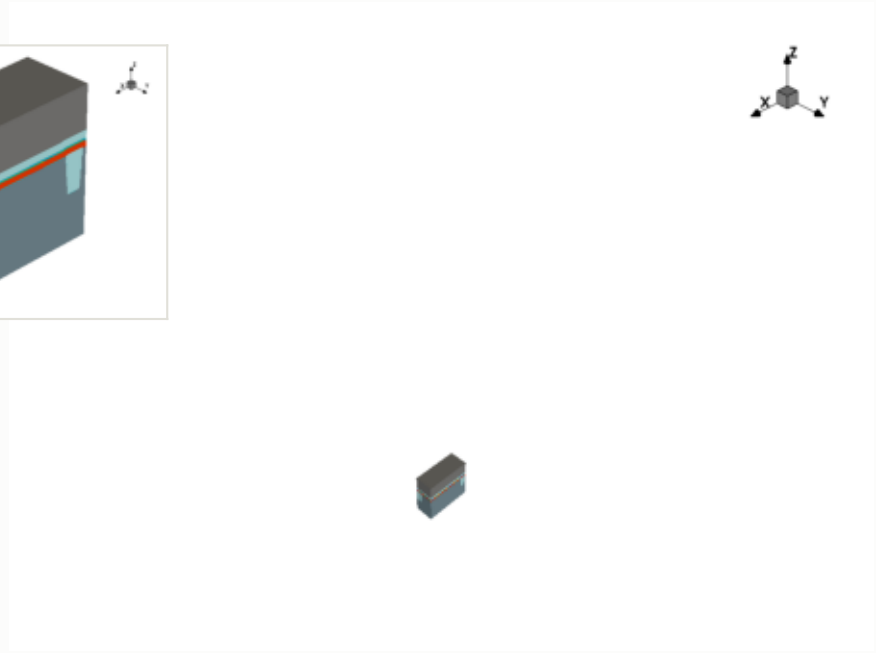


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

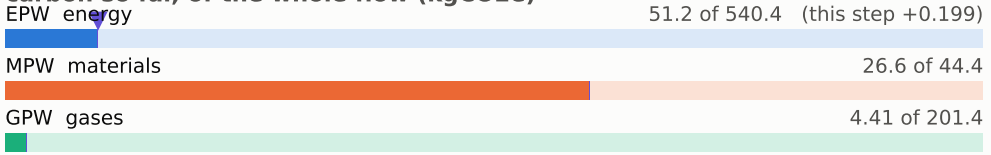


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

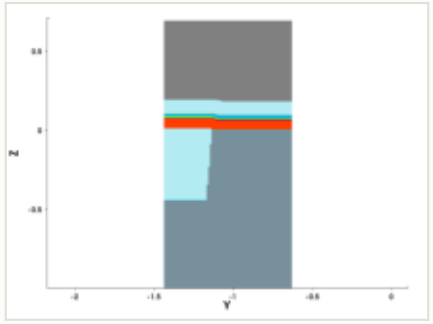


y cut at -1.035 µm

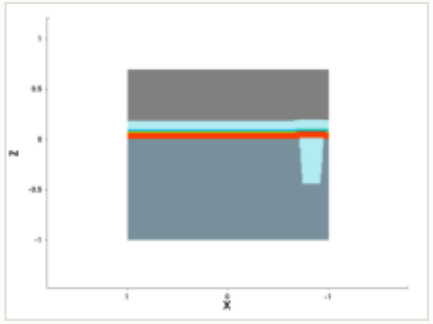


mask: layer 13:0, positive (OASIS)




steps by process area

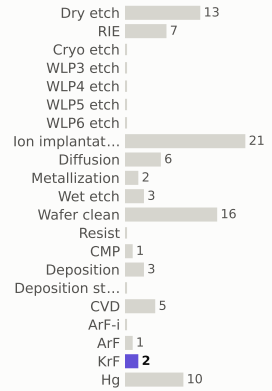

materials deposited (g)

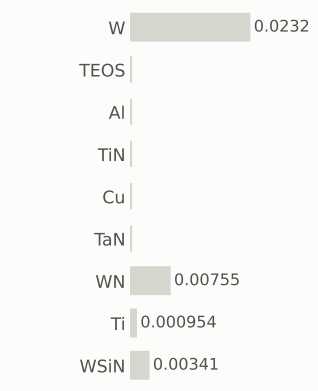

gases emitted (g)

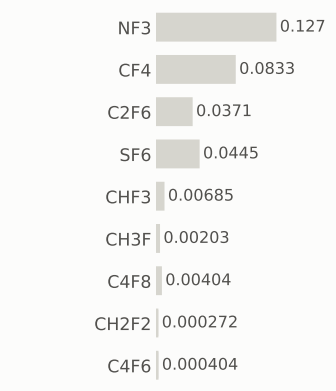


Step #970: RIE

etch_anisotropic · RIE

1.04	83.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

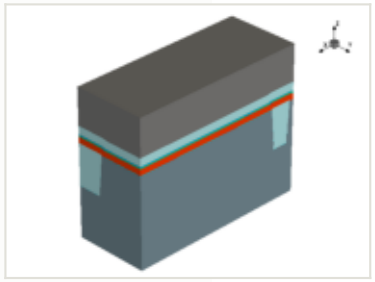


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

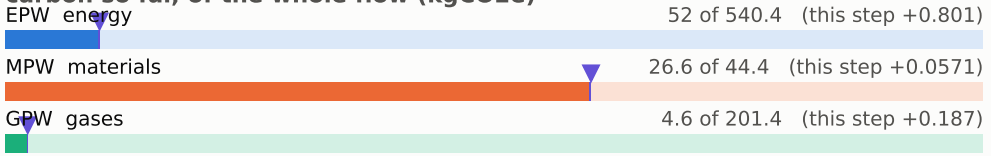


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

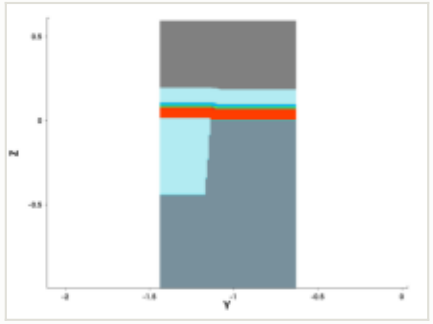


y cut at -1.035 µm

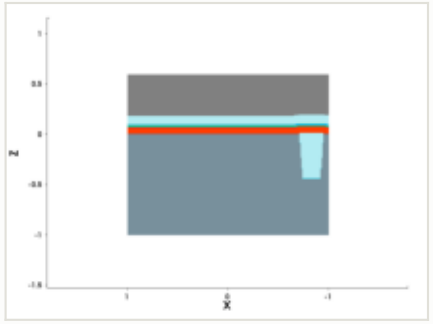


mask for this step

no mask for this step


steps by process area

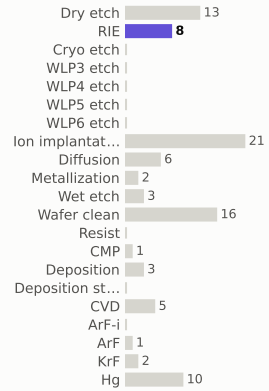

materials deposited (g)



gases emitted (g)

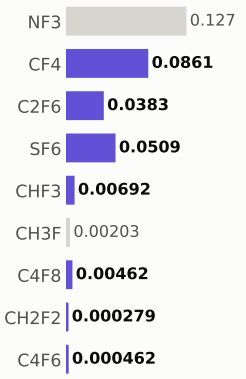


Step #980: RIE

etch_anisotropic · RIE

1.04	84.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

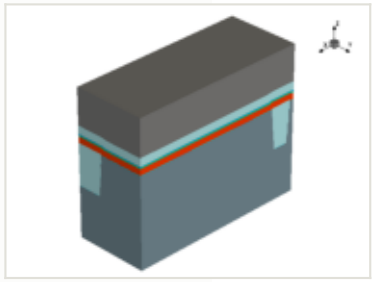






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

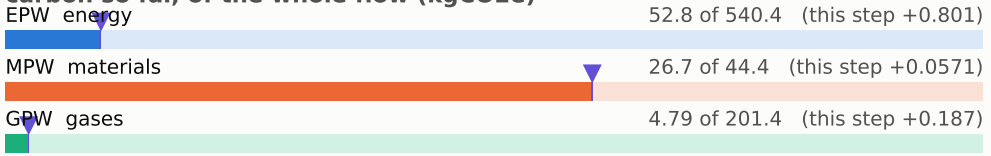


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

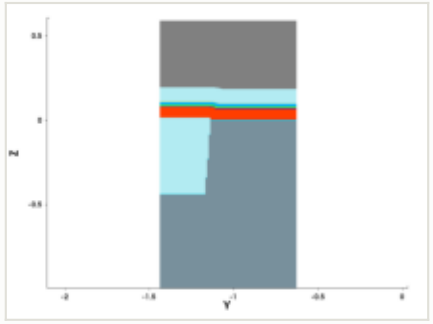


y cut at -1.035 µm

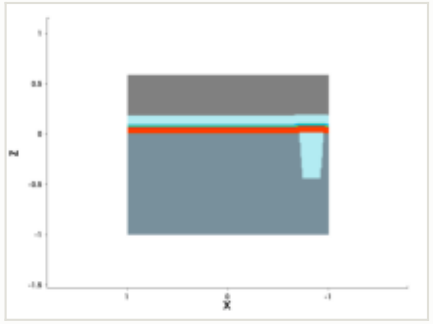


mask for this step

no mask for this step


steps by process area

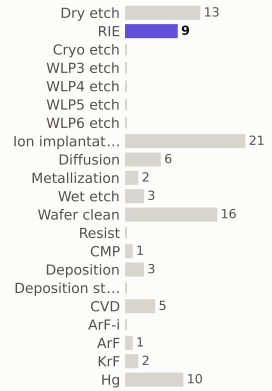

materials deposited (g)



gases emitted (g)

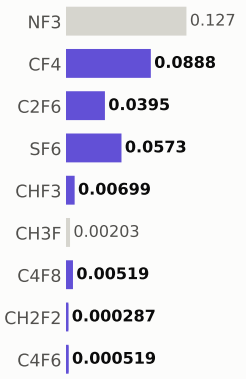


Step #990: RIE


etch_anisotropic · RIE

1.04	85.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

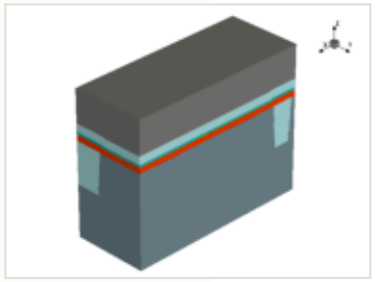

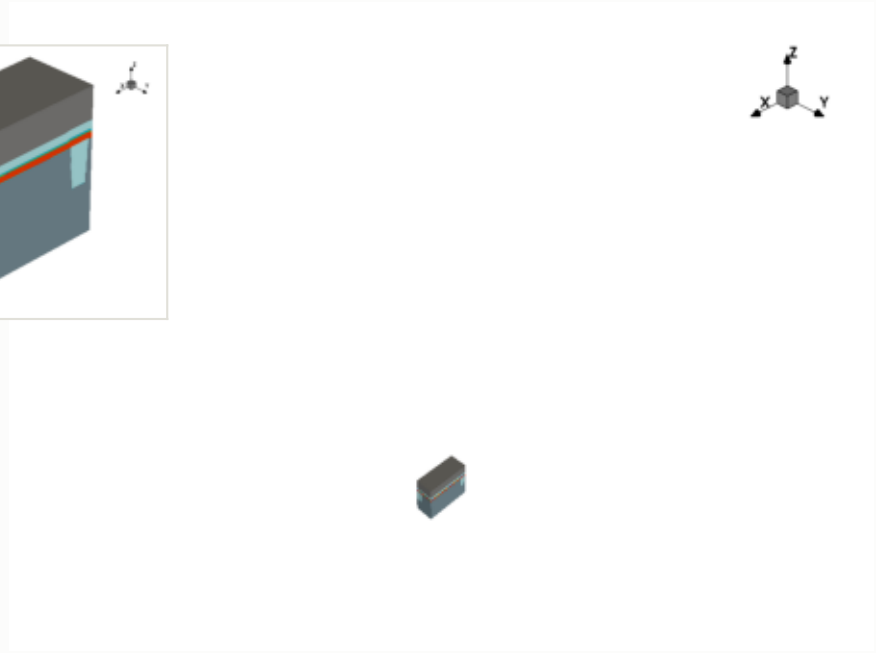


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

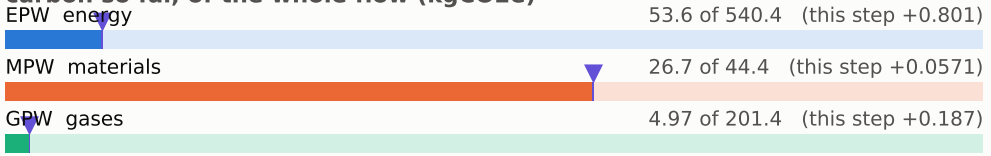


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

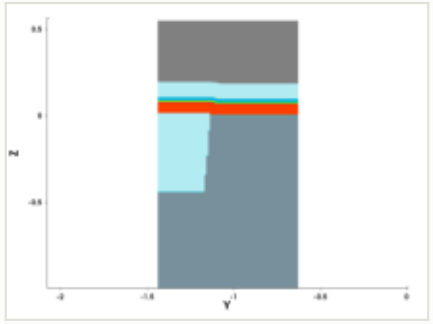


y cut at -1.035 µm

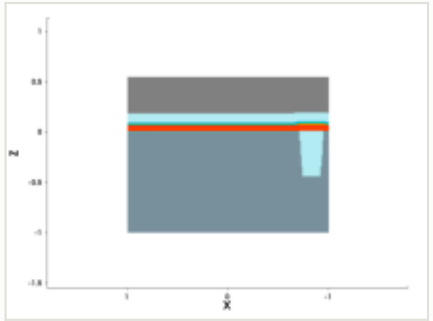


mask for this step

no mask for this step


steps by process area

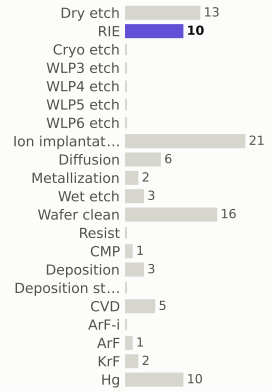

materials deposited (g)

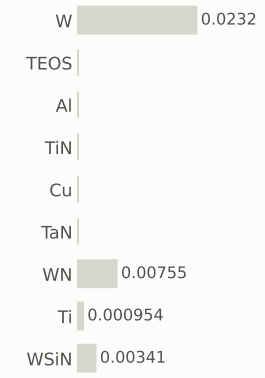

gases emitted (g)

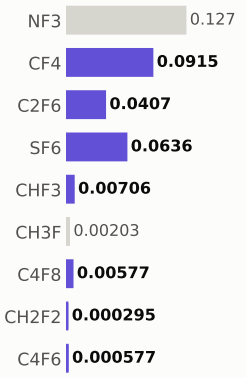


Step #1000: Dry_etch


etch_strip · Dry_etch

0.801	86.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

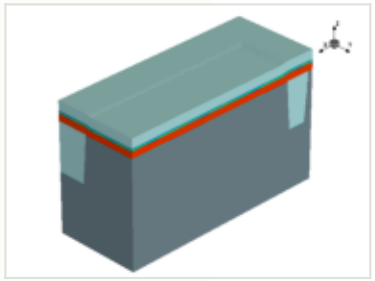

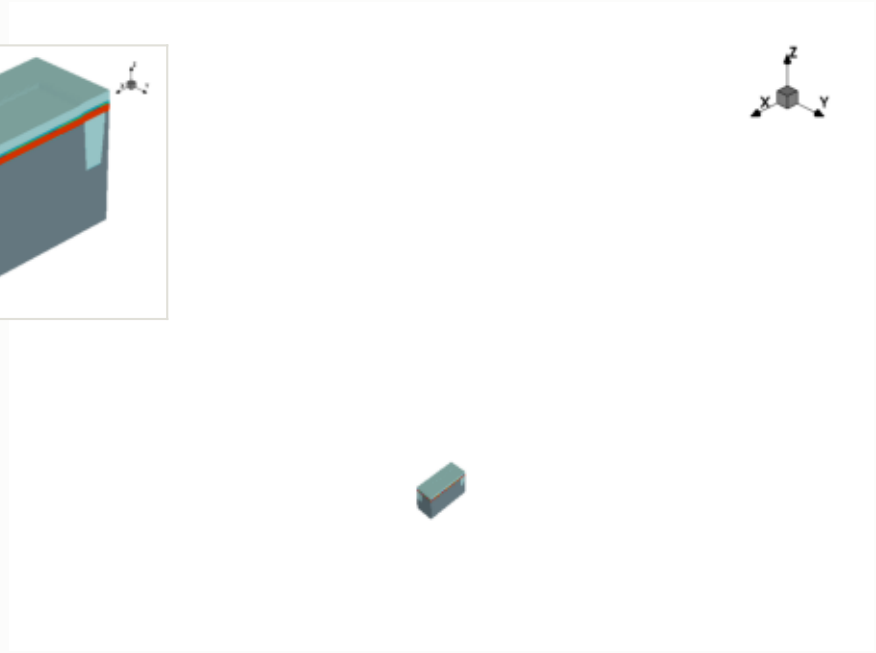


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

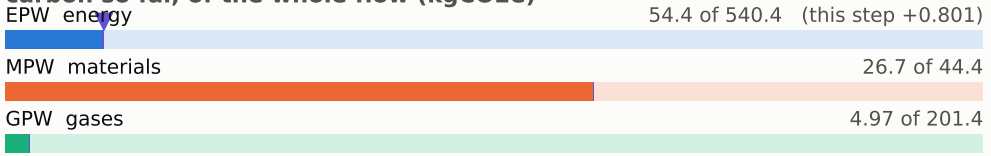


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

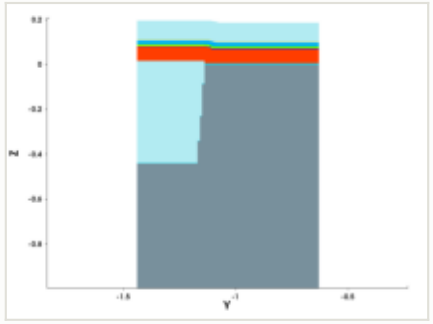


y cut at -1.035 µm

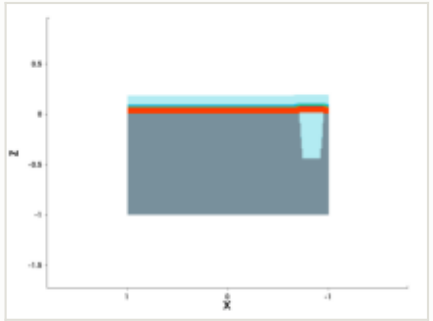


mask for this step

no mask for this step


steps by process area

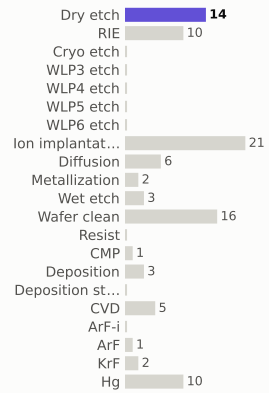

materials deposited (g)

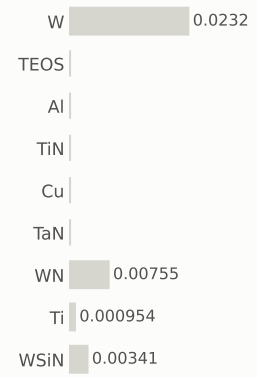

gases emitted (g)

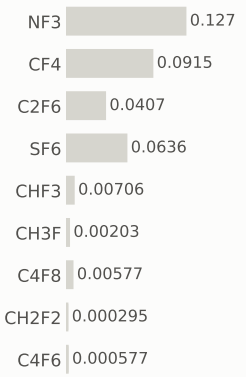


Step #1010: Wafer_clean


clean · Wafer_clean

0.169	86.3	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

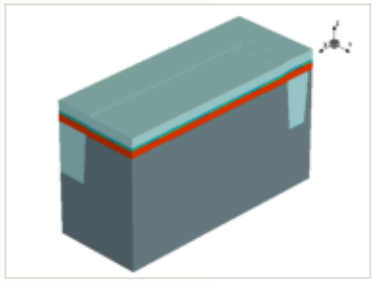


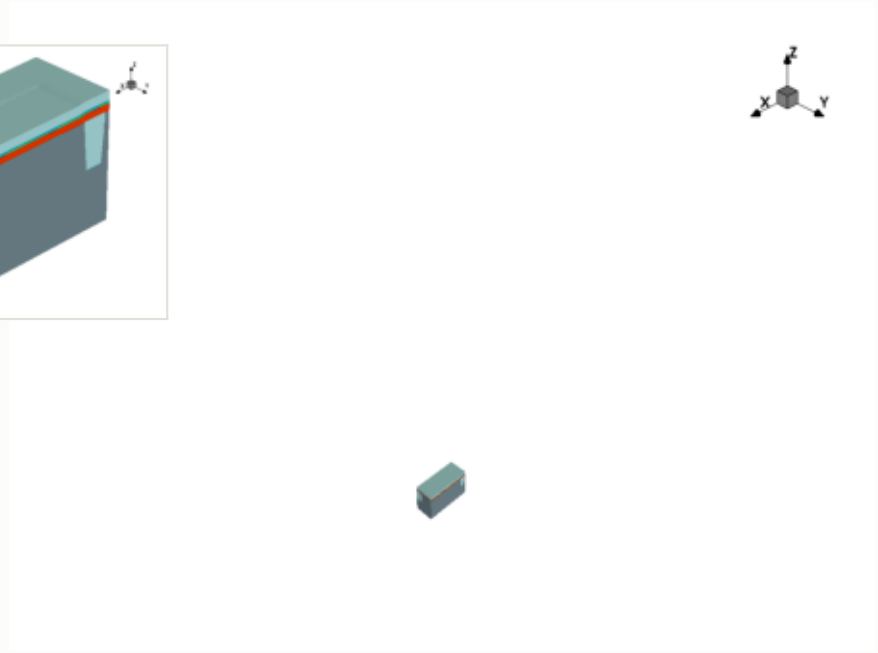

x cut at 0.000 µm

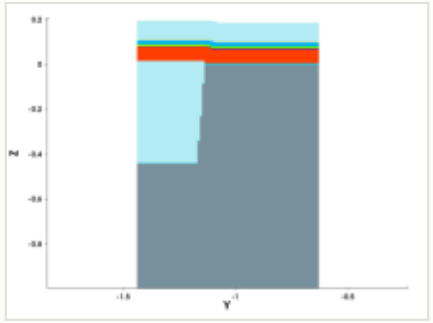

y cut at -1.035 µm

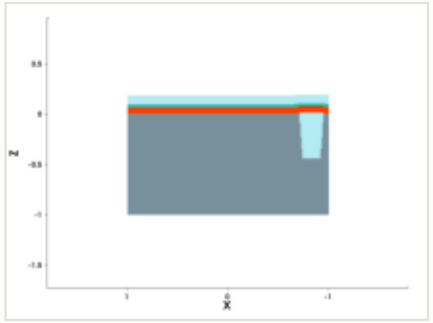

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

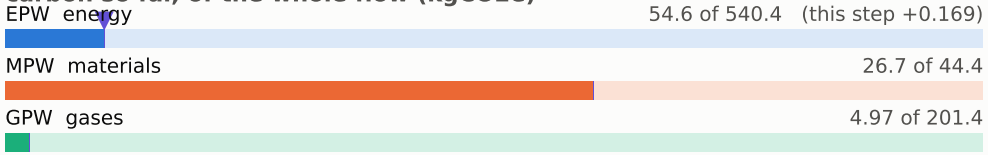


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

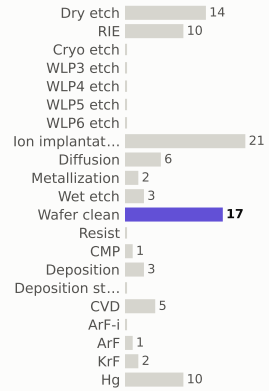

materials deposited (g)



gases emitted (g)

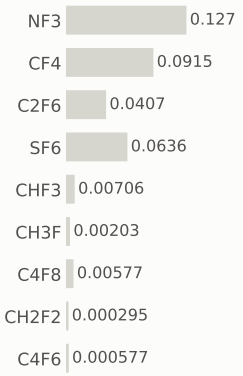


Step #1020: ArF

litho_patterning · ArF

0.199	86.5	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

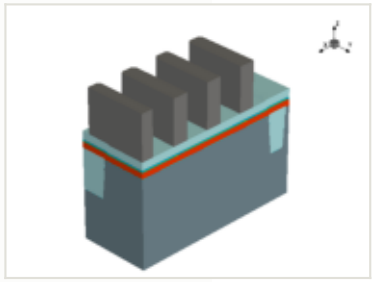






this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

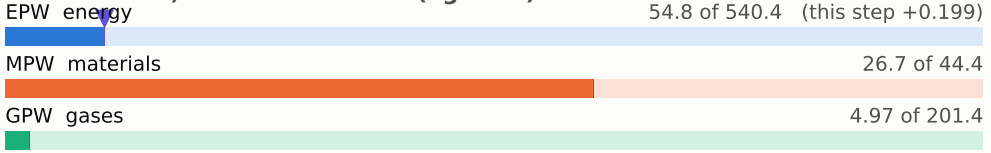


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

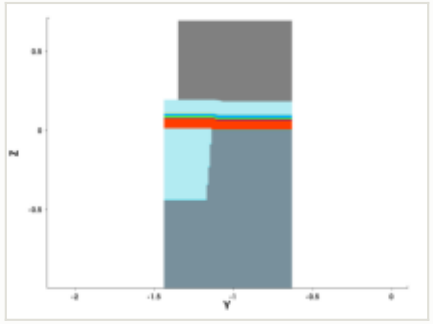


y cut at -1.035 µm

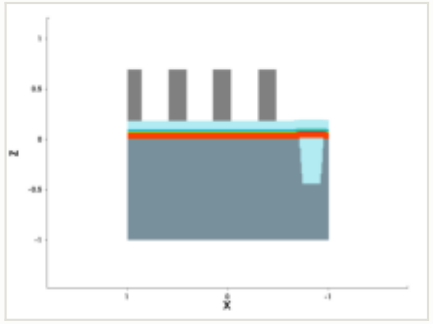


mask: layer 14:0, positive (OASIS)




steps by process area

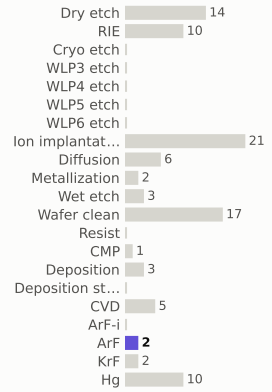

materials deposited (g)



gases emitted (g)

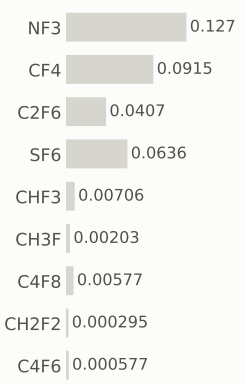


Step #1030: RIE

etch_anisotropic · RIE

1.04	87.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

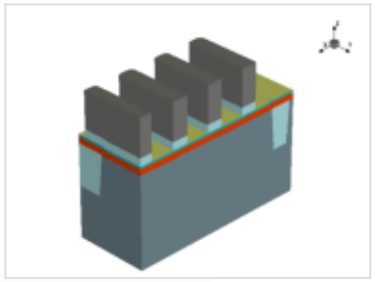






x cut at 0.000 µm

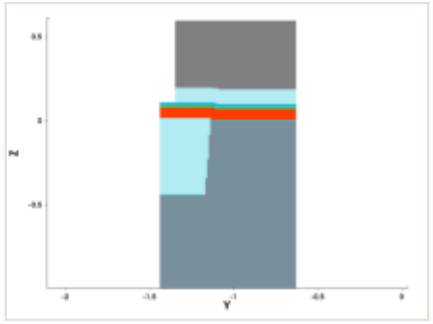

y cut at -1.035 µm

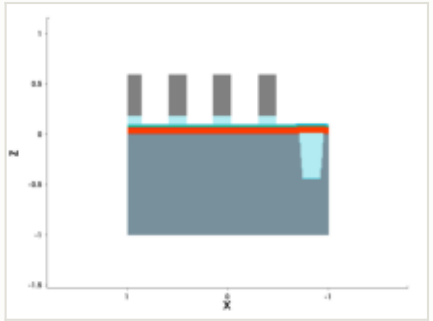

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

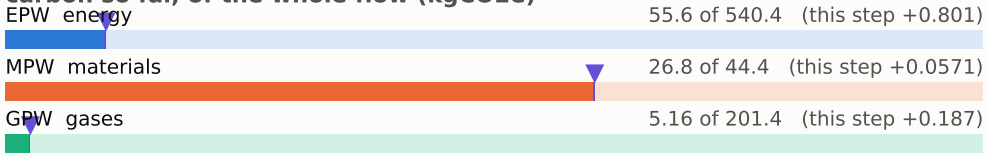


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

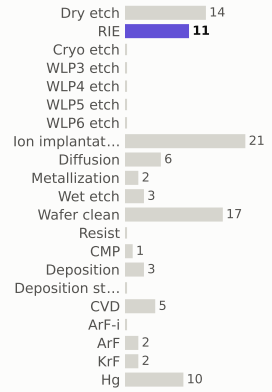

materials deposited (g)

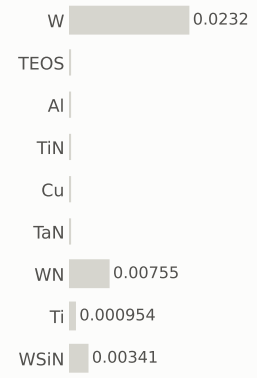

gases emitted (g)

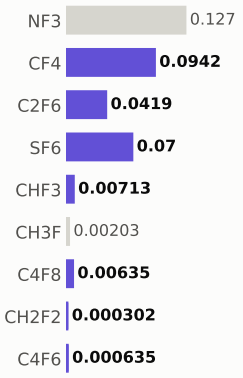


Step #1040: RIE


etch_anisotropic · RIE

1.04	88.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

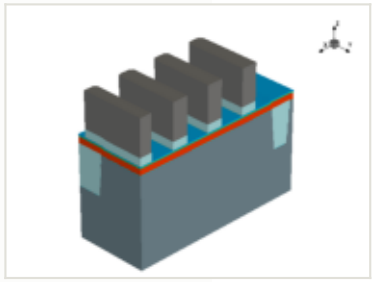

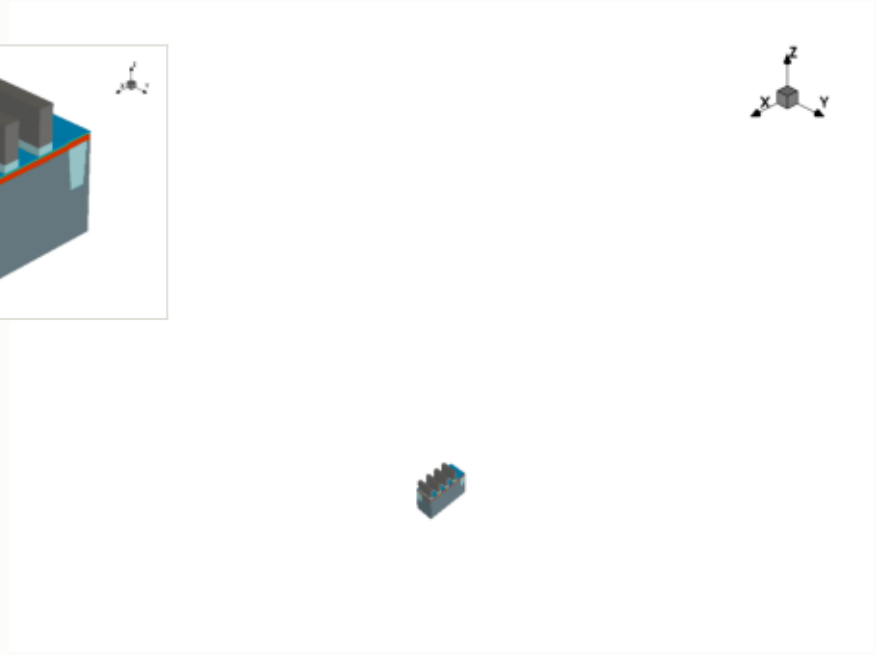


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

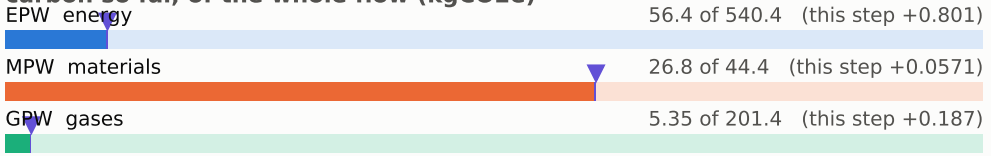


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

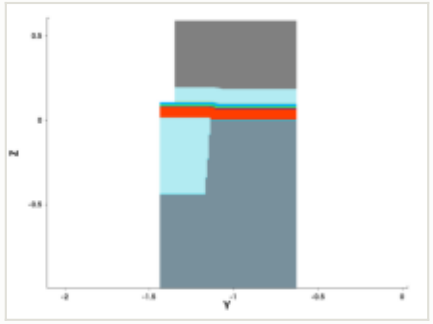


y cut at -1.035 µm

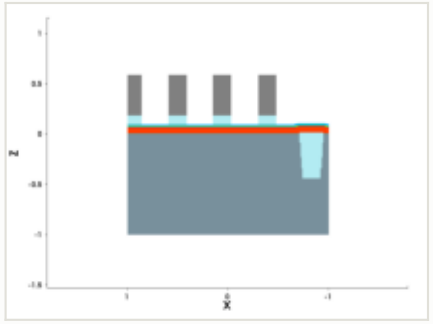


mask for this step

no mask for this step


steps by process area

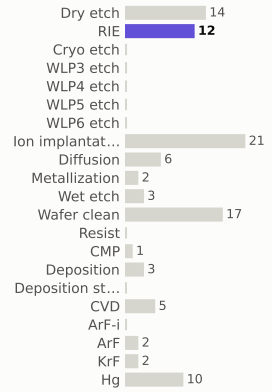

materials deposited (g)

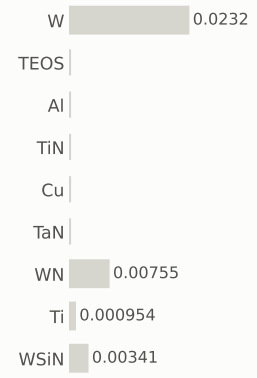

gases emitted (g)

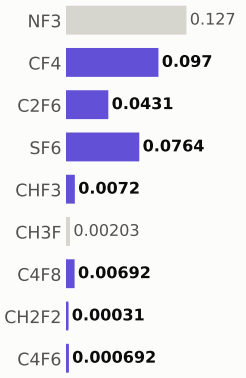


Step #1050: RIE

etch_anisotropic · RIE

1.04	89.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

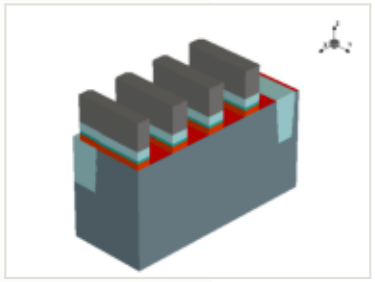






x cut at 0.000 µm

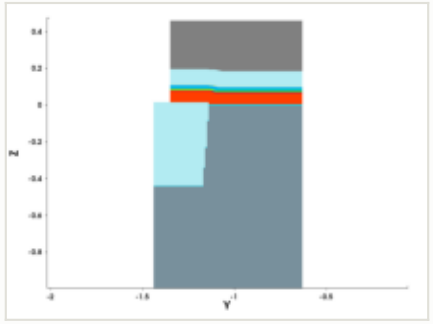

y cut at -1.035 µm

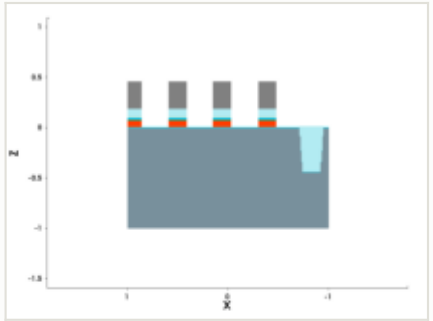

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

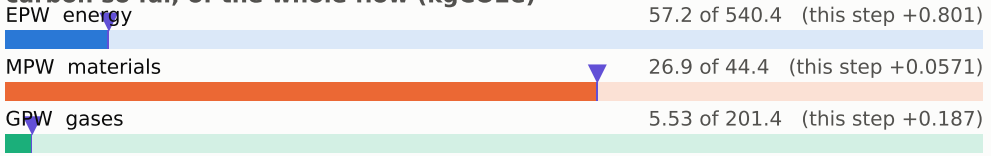


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

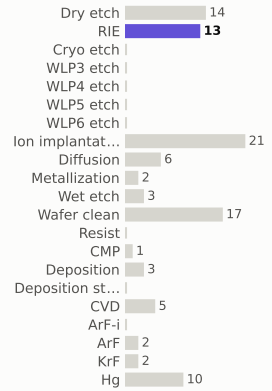

materials deposited (g)

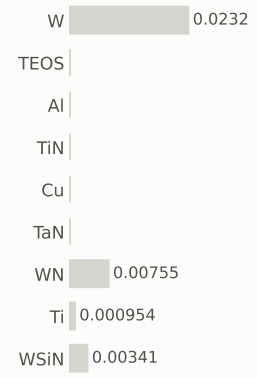

gases emitted (g)

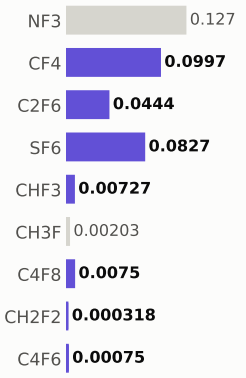


Step #1060: RIE

etch_anisotropic · RIE

1.04	90.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

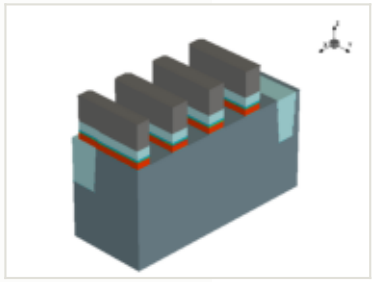






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

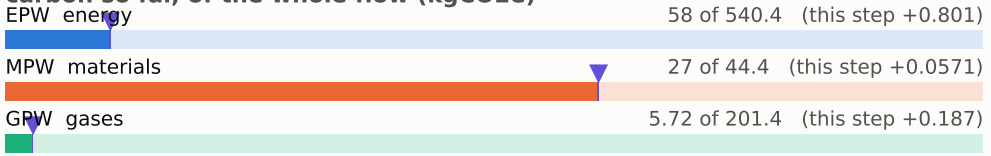


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

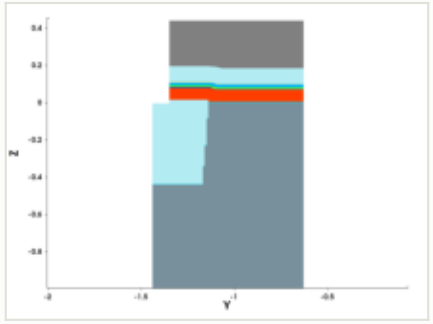


y cut at -1.035 µm

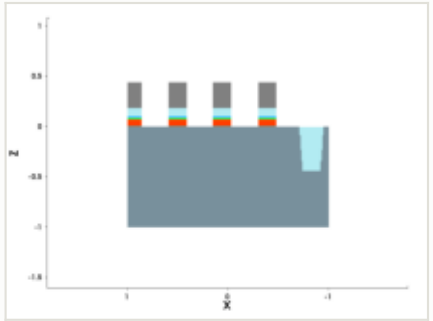


mask for this step

no mask for this step


steps by process area

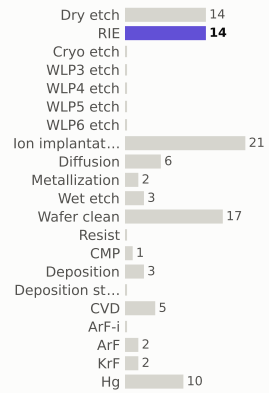

materials deposited (g)

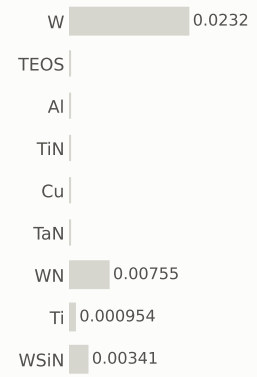

gases emitted (g)

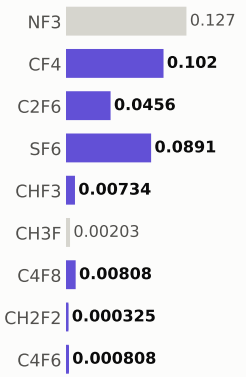


Step #1070: Dry_etch

etch_strip · Dry_etch

0.801	91.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

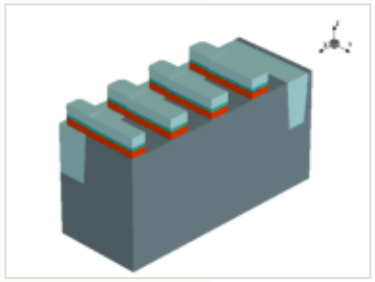






x cut at 0.000 µm

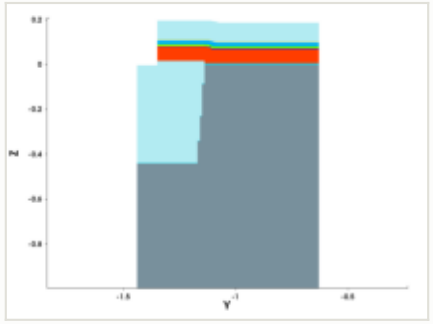

y cut at -1.035 µm

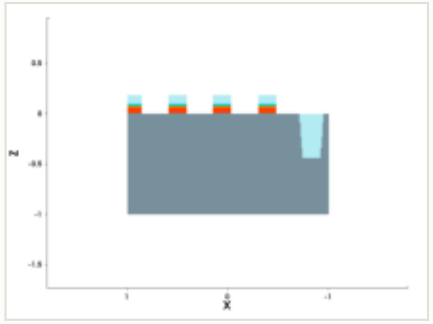

mask for this step


no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

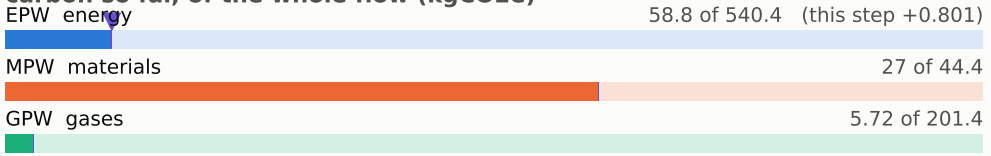


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

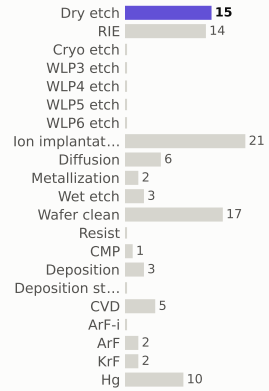

materials deposited (g)

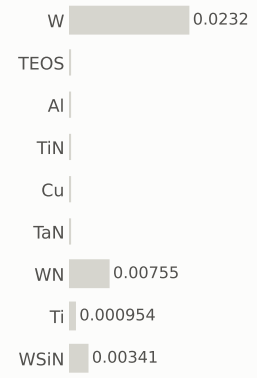

gases emitted (g)

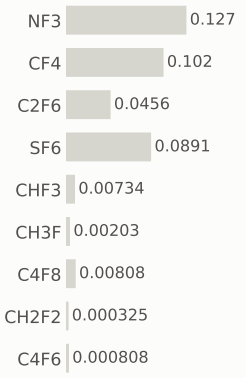


Step #1080: Wafer_clean


clean · Wafer_clean

0.169	91.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

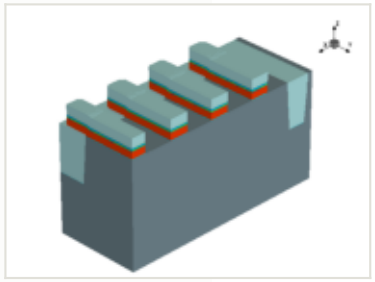

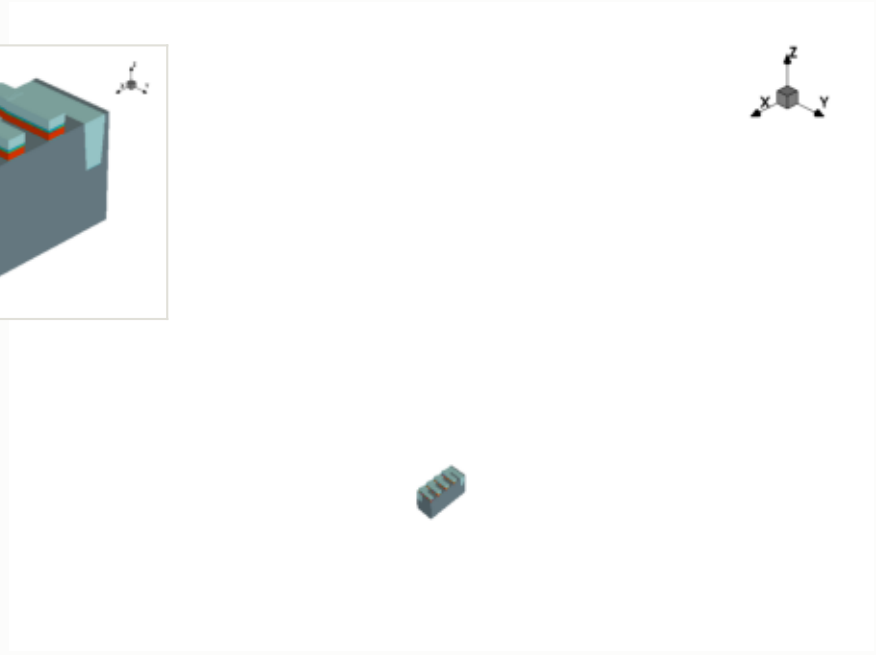


this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

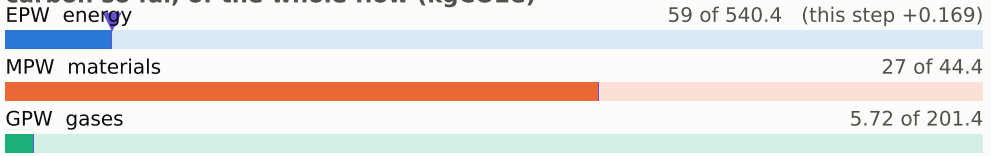


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

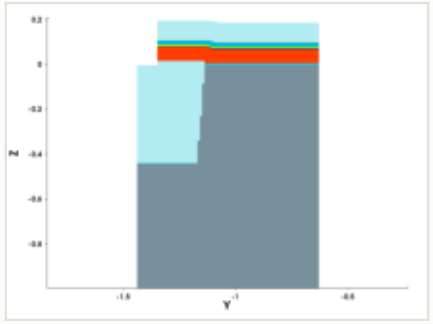


y cut at -1.035 µm

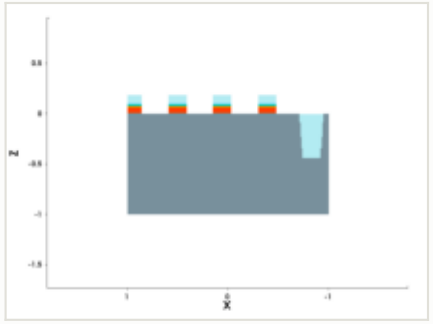


mask for this step

no mask for this step


steps by process area

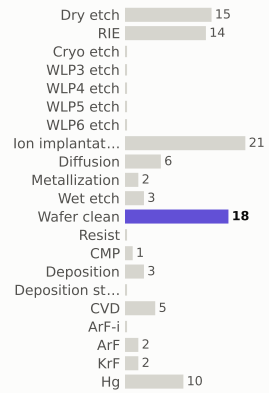

materials deposited (g)

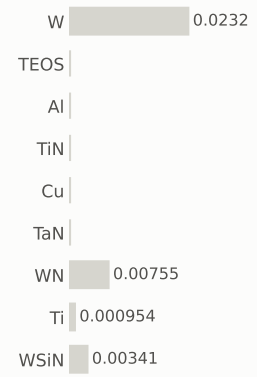

gases emitted (g)

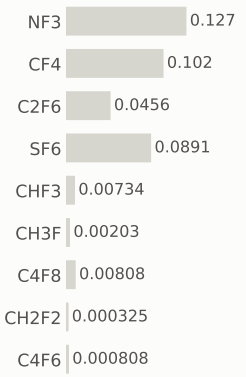


Step #1090: KrF


litho_patterning · KrF

0.199	91.9	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

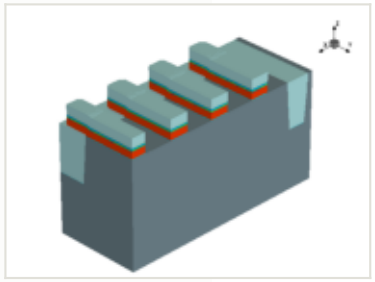

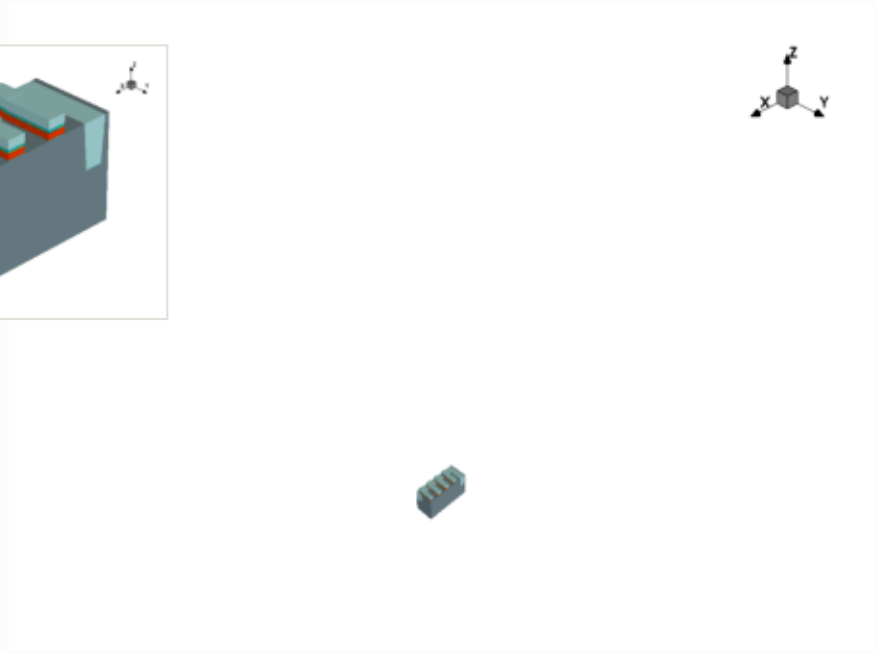


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

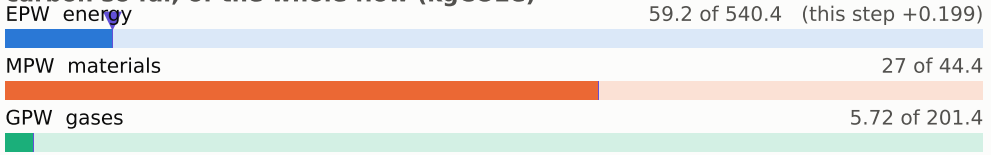


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

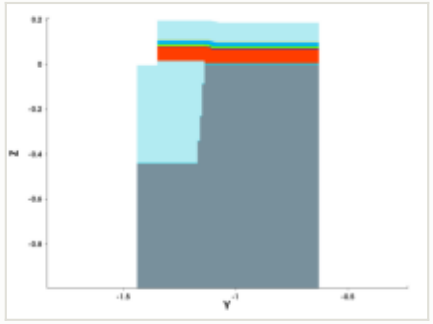


y cut at -1.035 µm

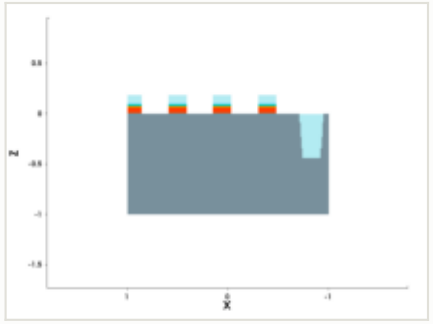


mask: layer 15:0 (OASIS)




steps by process area

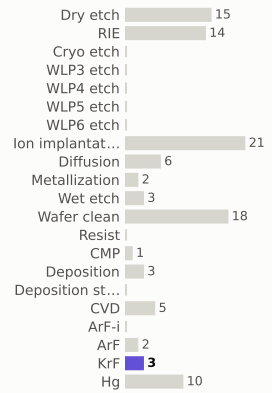

materials deposited (g)



gases emitted (g)

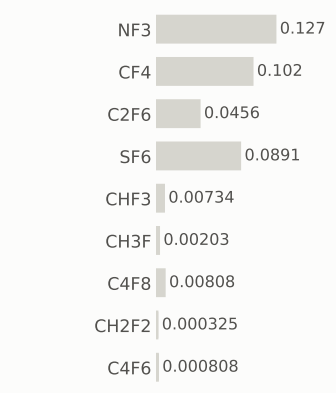


Step #1100: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	92.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

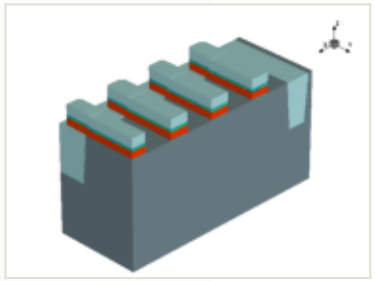






x cut at 0.000 µm

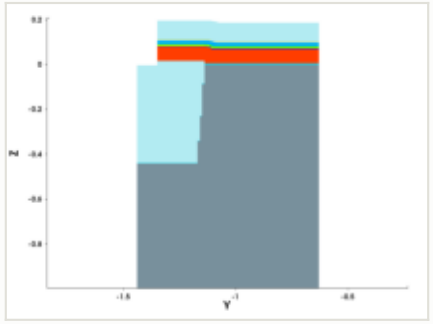

y cut at -1.035 µm

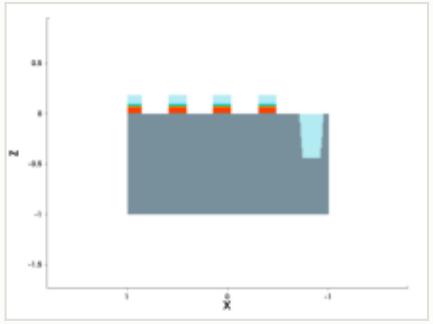

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

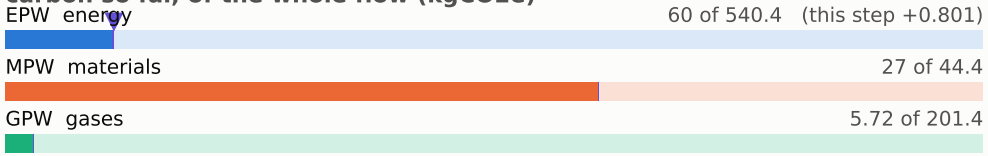


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

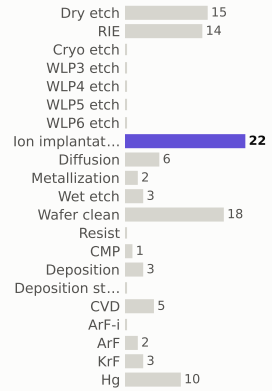

materials deposited (g)

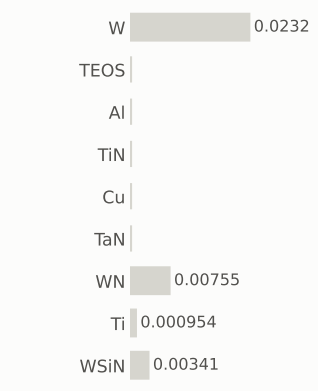

gases emitted (g)

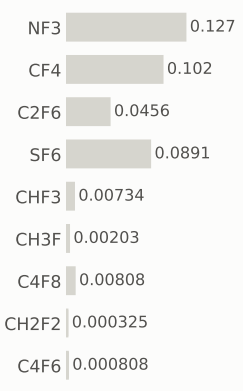


Step #1110: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	93.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

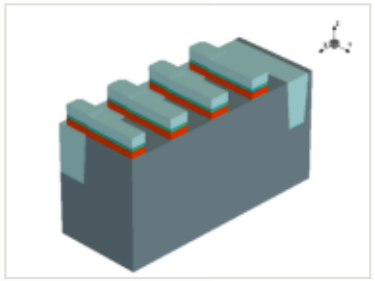


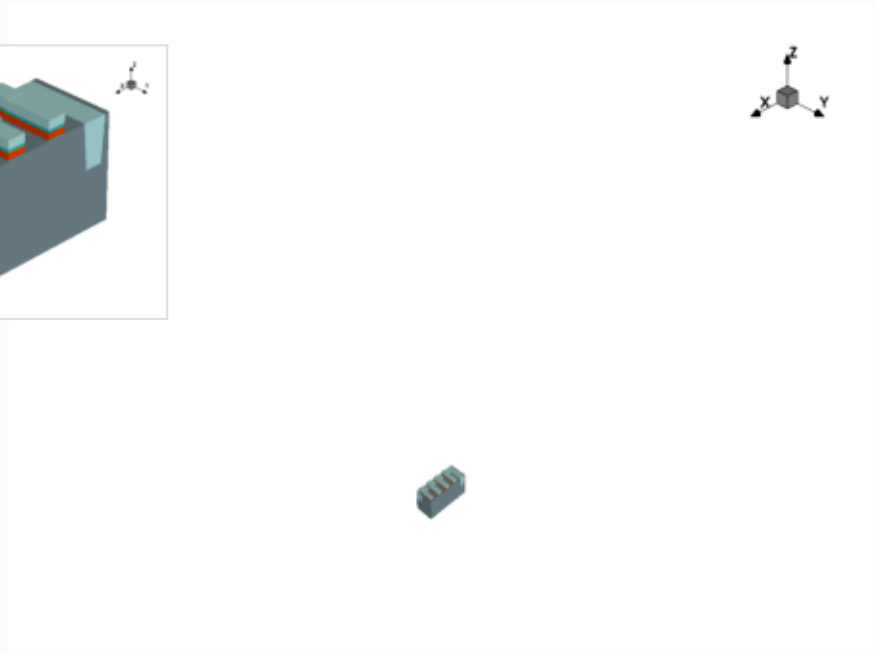

x cut at 0.000 µm

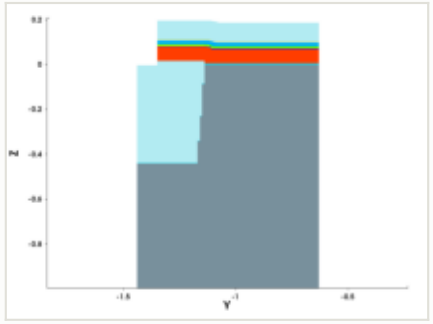

y cut at -1.035 µm

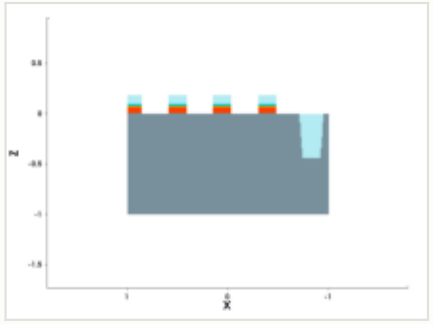

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

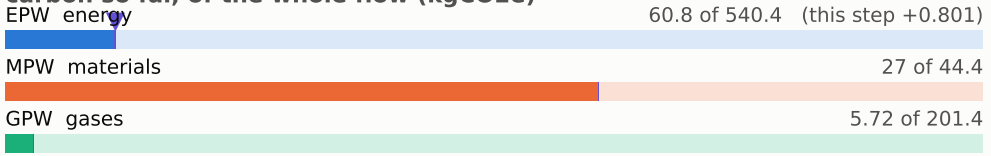


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

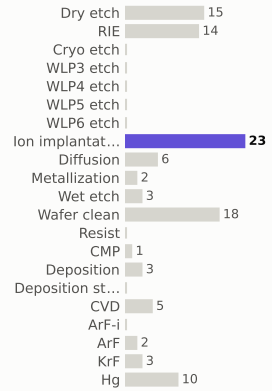

materials deposited (g)

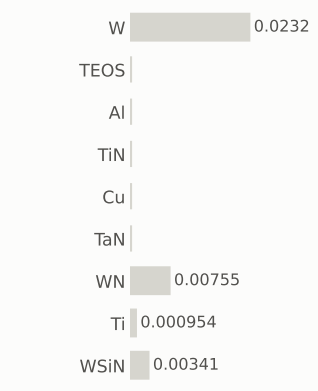

gases emitted (g)

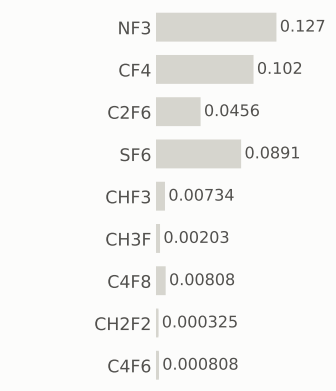


Step #1120: Dry_etch

etch_strip · Dry_etch

0.801	94.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

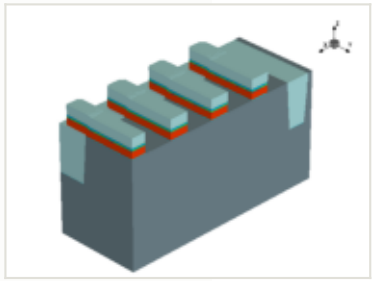






x cut at 0.000 µm

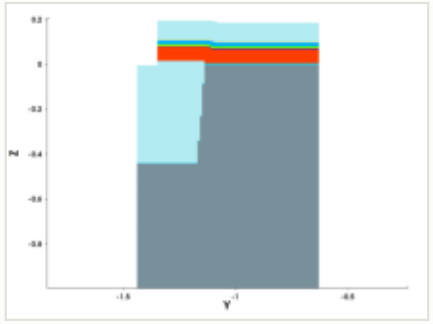

y cut at -1.035 µm

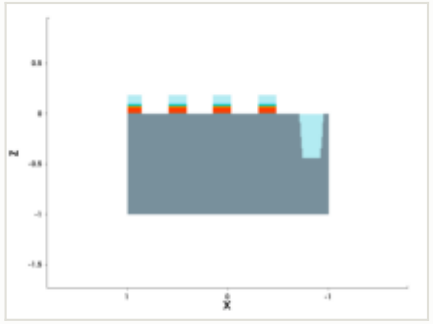

mask for this step


no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

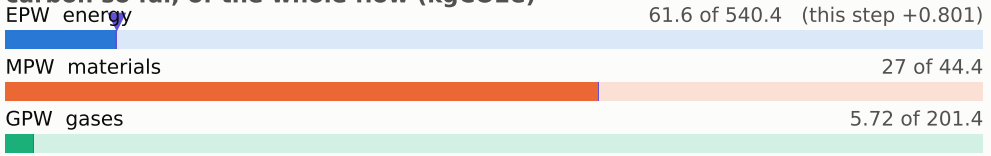


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

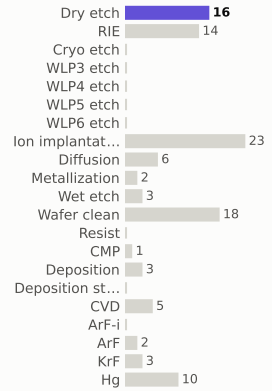

materials deposited (g)

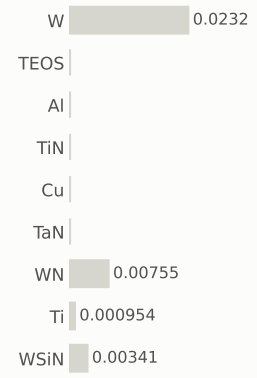

gases emitted (g)

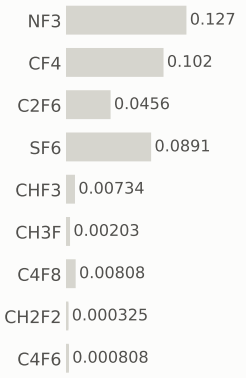


Step #1130: Wafer_clean


clean · Wafer_clean

0.169	94.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

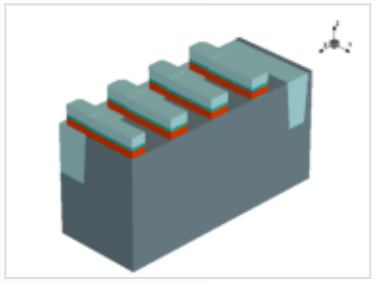

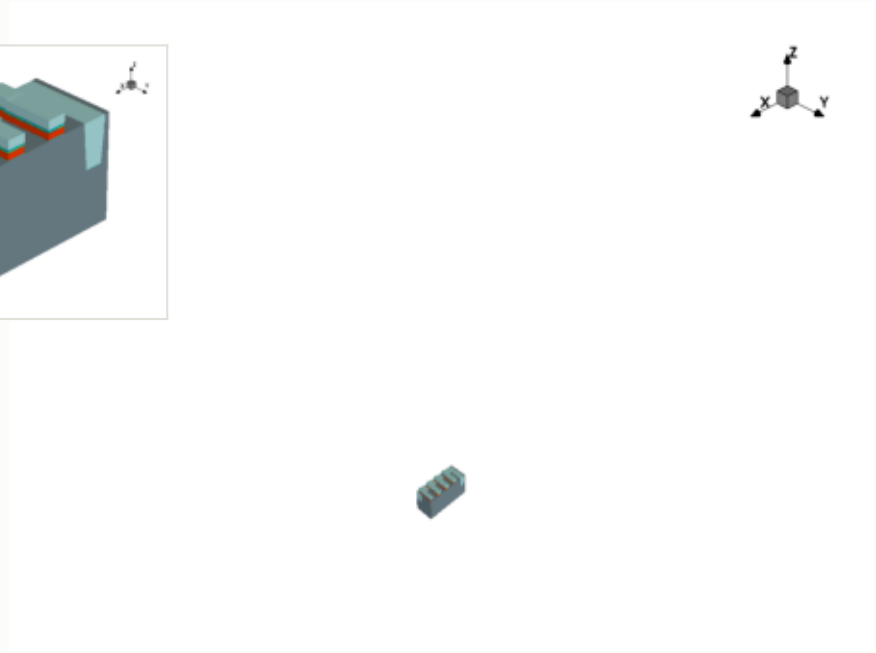


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

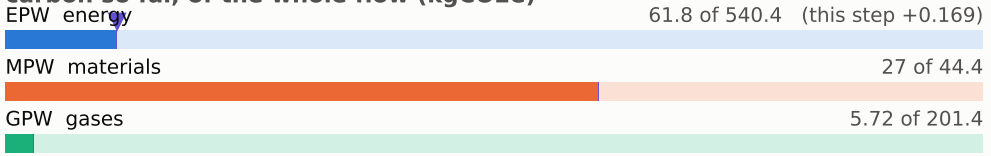


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

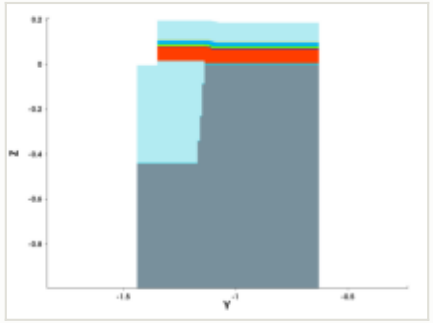


y cut at -1.035 µm

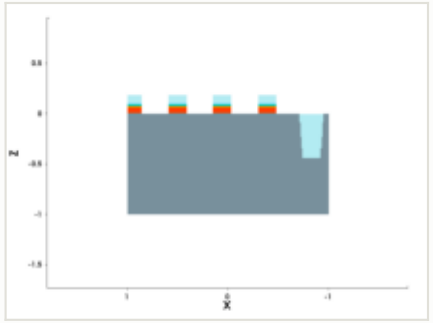


mask for this step

no mask for this step


steps by process area

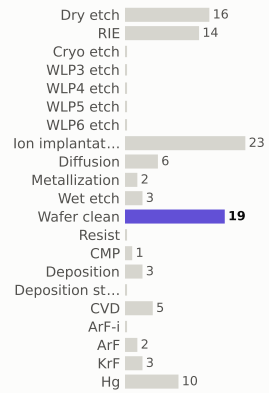

materials deposited (g)

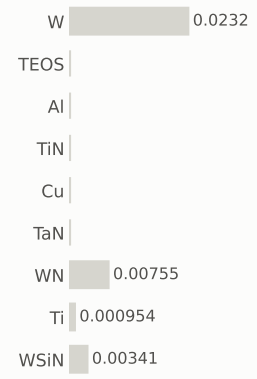

gases emitted (g)

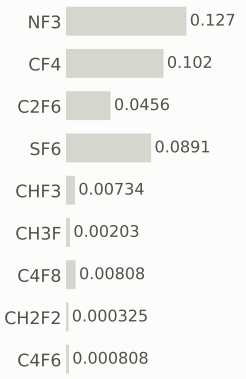


Step #1140: KrF


litho_patterning · KrF

0.199	94.6	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

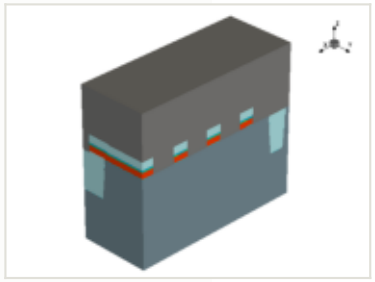

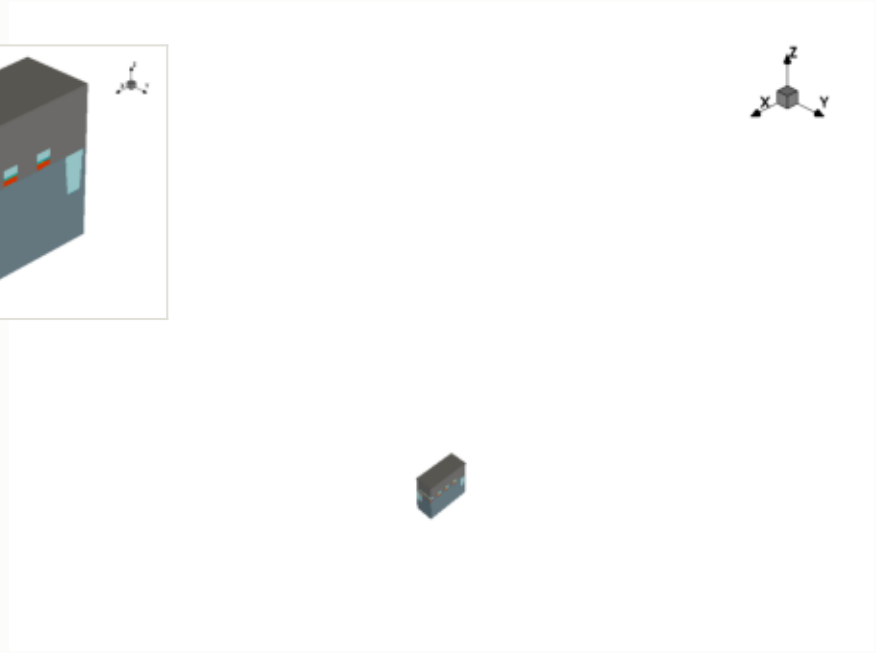


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

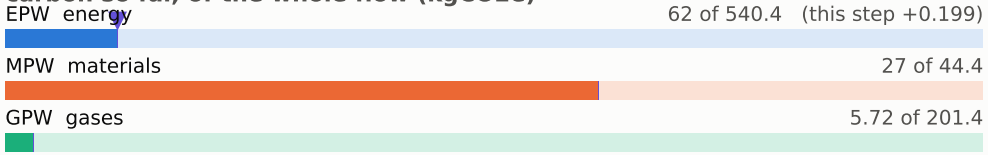


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

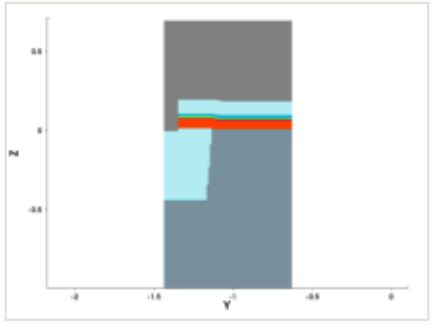


y cut at -1.035 µm

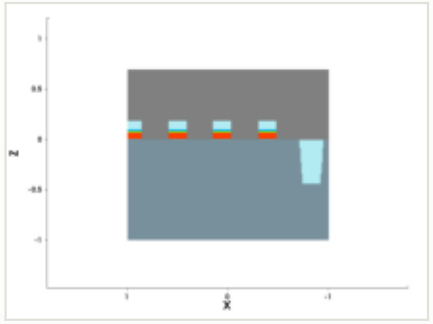


mask: layer 16:0, positive (OASIS)




steps by process area

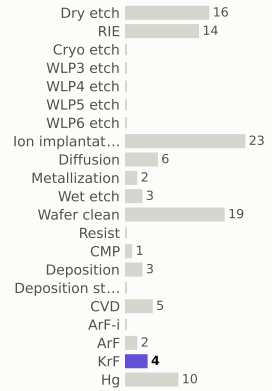

materials deposited (g)



gases emitted (g)

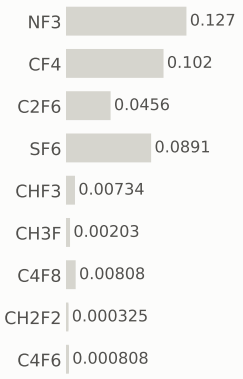


Step #1150: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	95.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

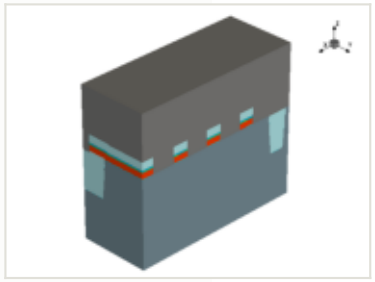






x cut at 0.000 µm

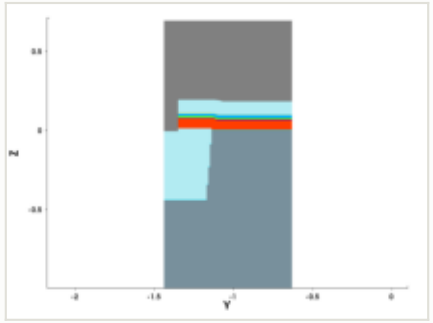

y cut at -1.035 µm

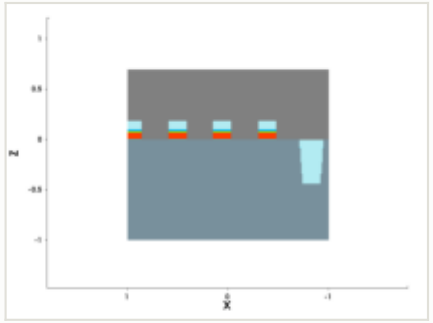

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

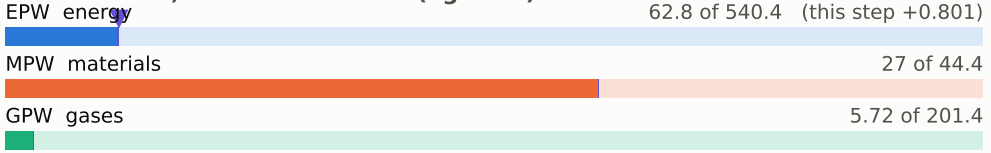


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

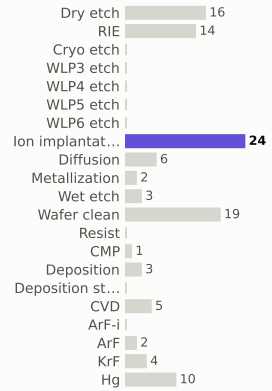

materials deposited (g)

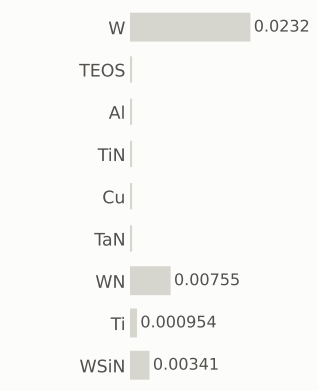

gases emitted (g)

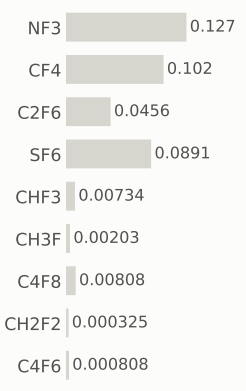


Step #1160: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	96.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

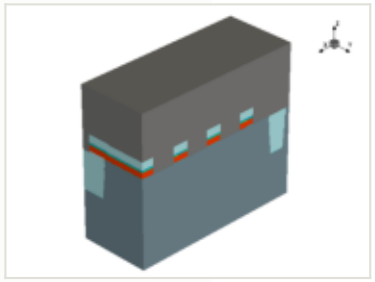






x cut at 0.000 µm

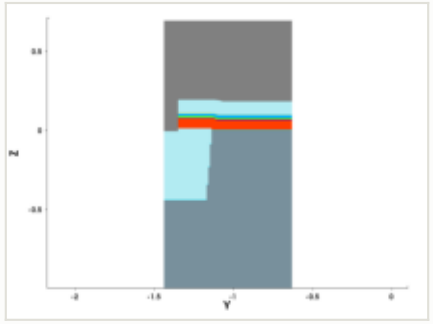

y cut at -1.035 µm

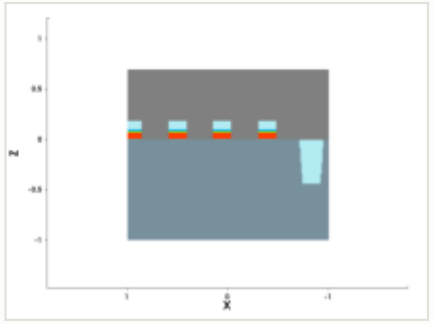

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

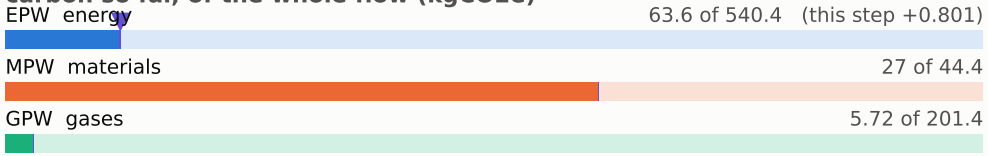


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

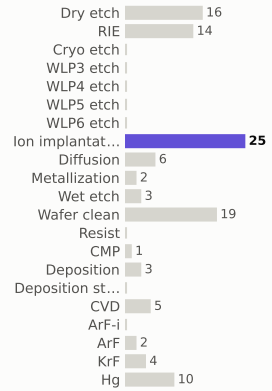

materials deposited (g)

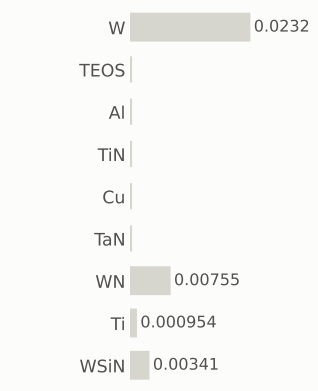

gases emitted (g)

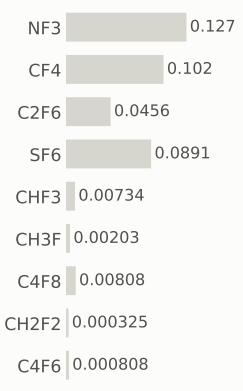


Step #1170: Dry_etch

etch_strip · Dry_etch

0.801	97	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

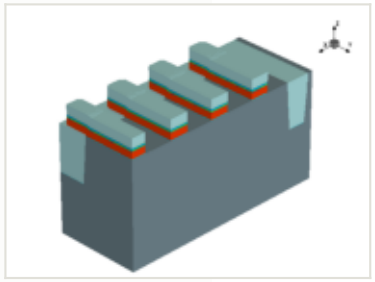






x cut at 0.000 µm

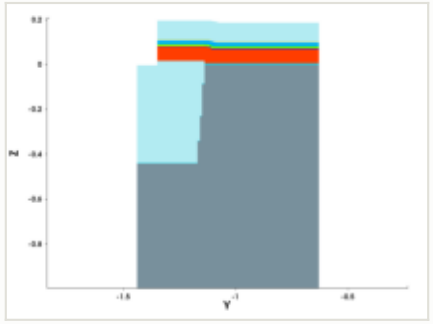

y cut at -1.035 µm

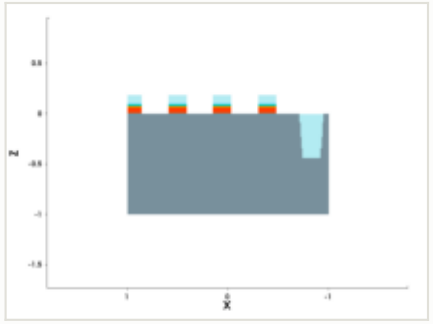


mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

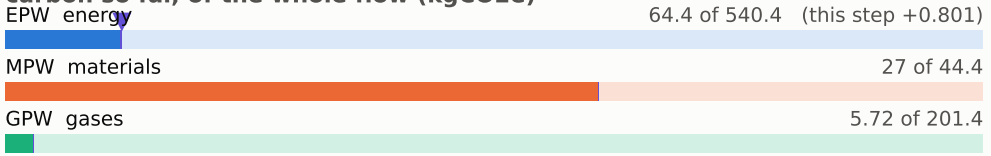


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

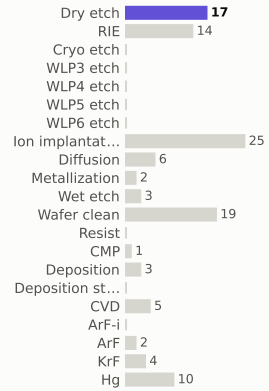

materials deposited (g)

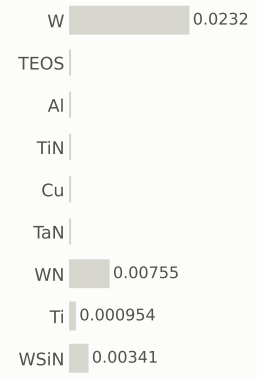

gases emitted (g)

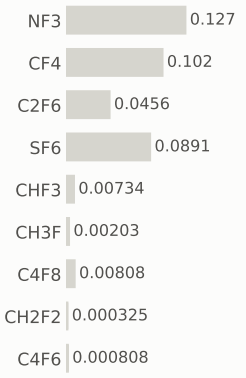


Step #1180: Wafer_clean

clean · Wafer_clean

0.169	97.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

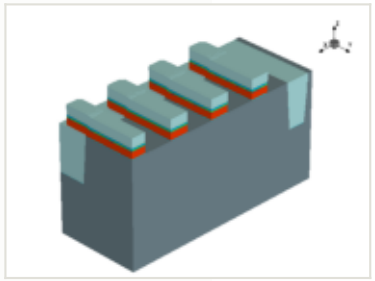






x cut at 0.000 µm

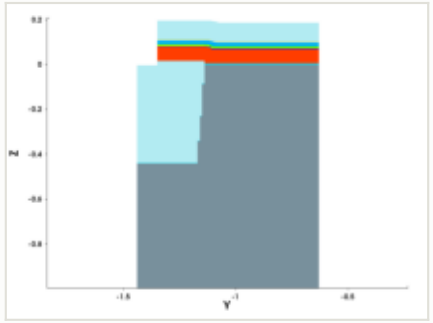

y cut at -1.035 µm

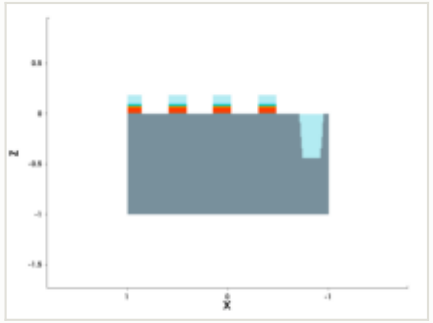

mask for this step

no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

EPW energy — 64.5 of 540.4 (this step +0.169)


MPW materials — 27 of 44.4

GPW gases — 5.72 of 201.4


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

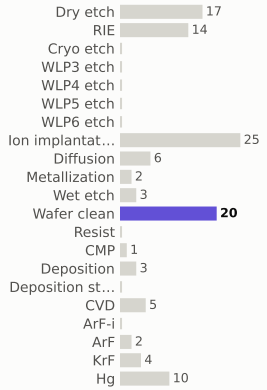

materials deposited (g)

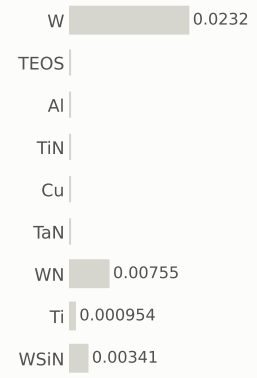

gases emitted (g)

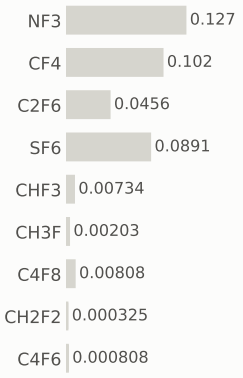


Step #1190: CVD

depo_isotropic · CVD

1.31	98.5	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

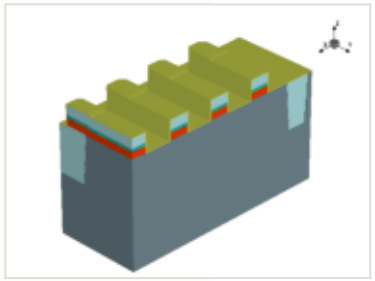






x cut at 0.000 µm

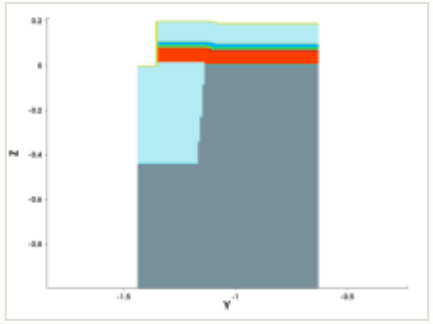

y cut at -1.035 µm

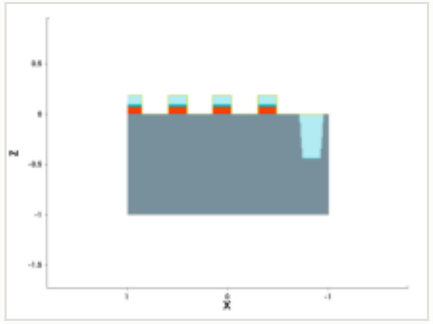

mask for this step


no mask for this step

this step

process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

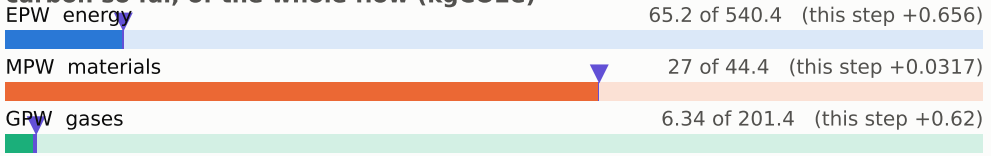


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

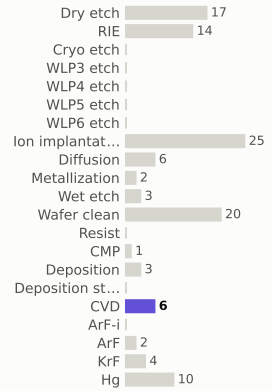

materials deposited (g)

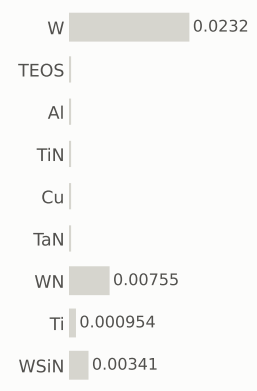

gases emitted (g)




Step #1200: CVD


depo_isotropic · CVD

1.31	99.8	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

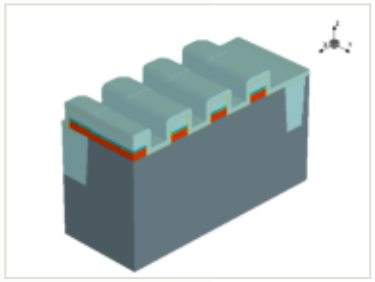

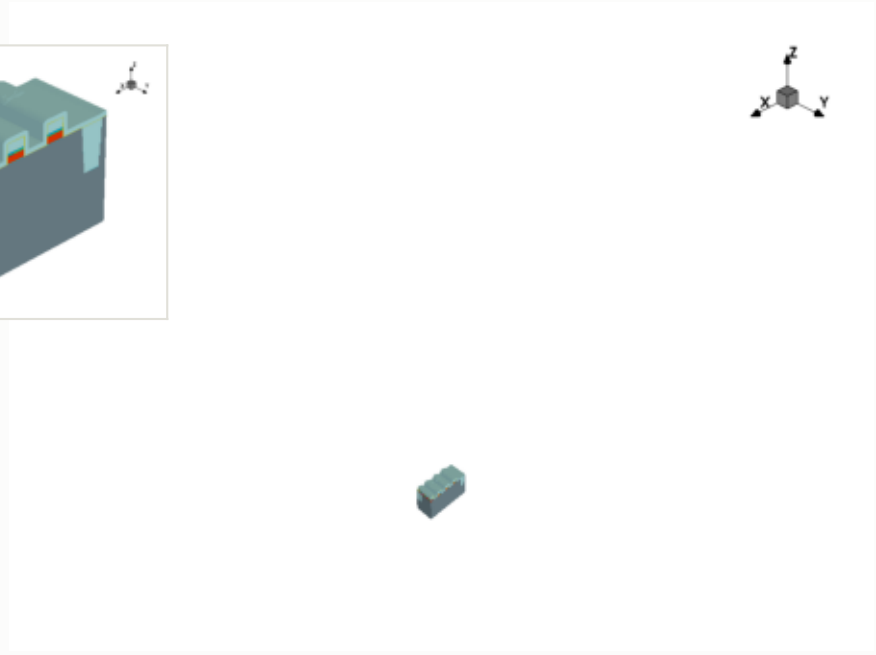


this step

process area	CVD
material	—
thickness	0.044 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

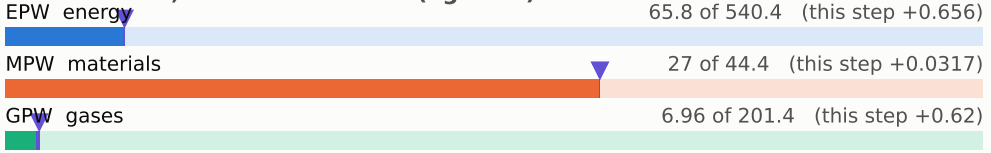


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

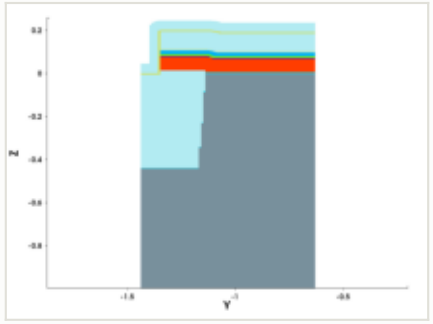


y cut at -1.035 µm

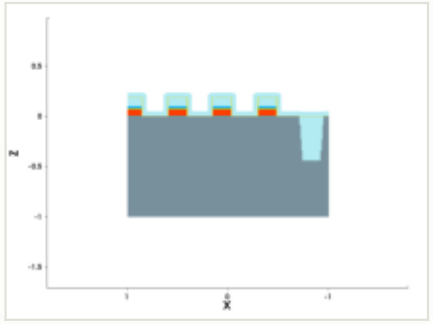


mask for this step

no mask for this step


steps by process area

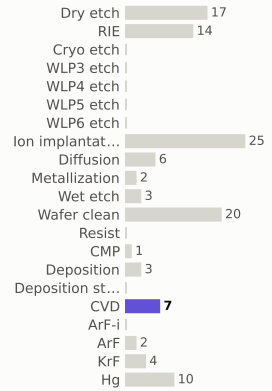

materials deposited (g)



gases emitted (g)

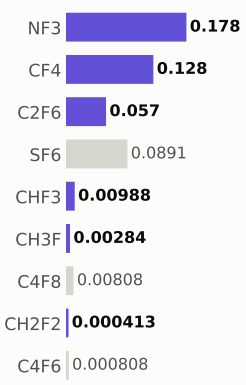


Step #1210: RIE

etch_anisotropic · RIE

1.04	100.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

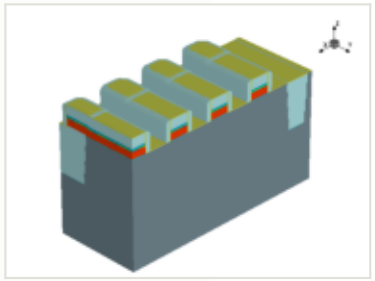






x cut at 0.000 µm

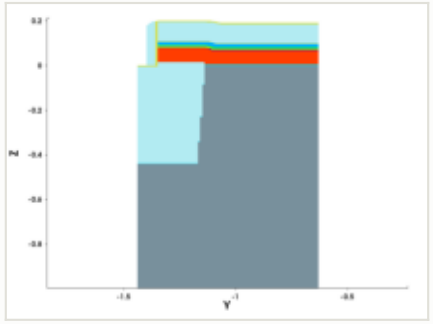

y cut at -1.035 µm

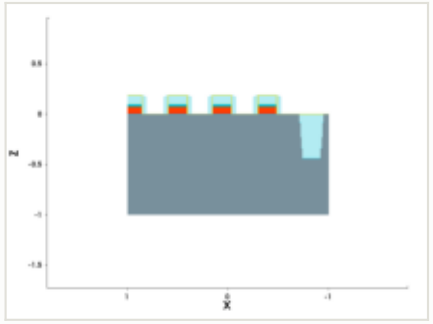

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

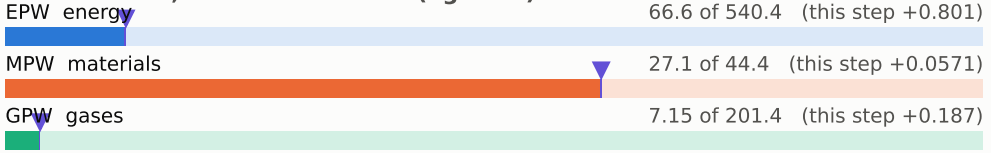


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

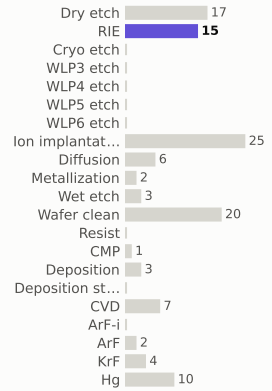

materials deposited (g)

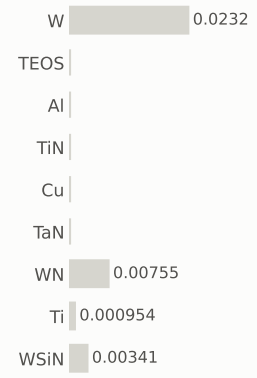

gases emitted (g)

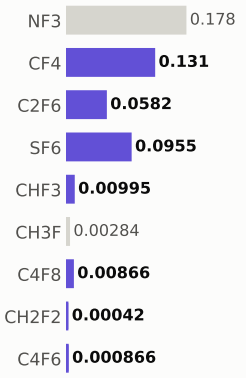


Step #1220: RIE

etch_anisotropic · RIE

1.04	101.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

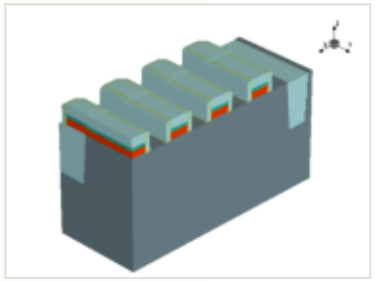






x cut at 0.000 µm

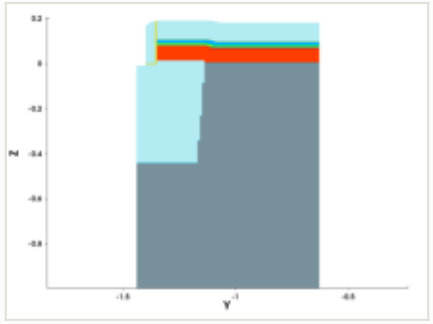

y cut at -1.035 µm

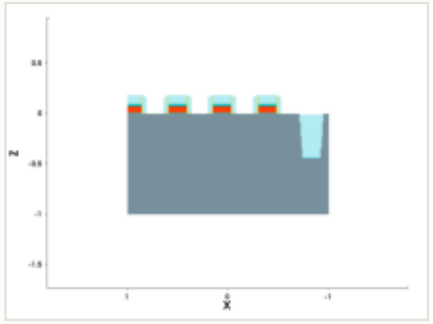

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

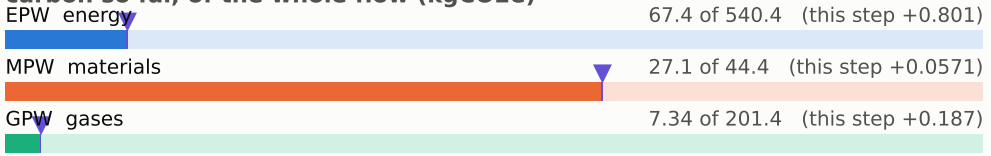


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

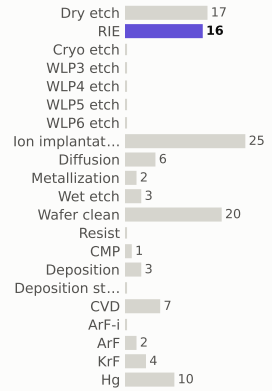

materials deposited (g)

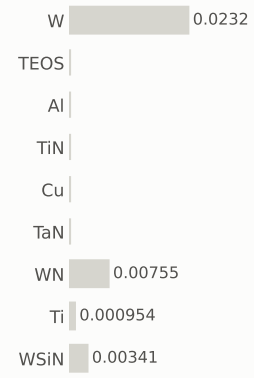

gases emitted (g)

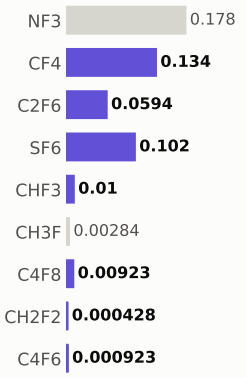


Step #1230: RIE


etch_anisotropic · RIE

1.04	103.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

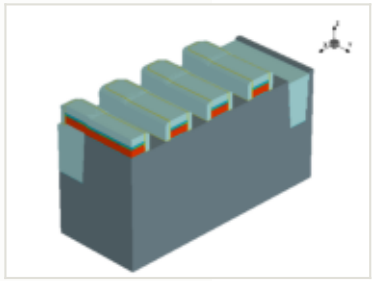

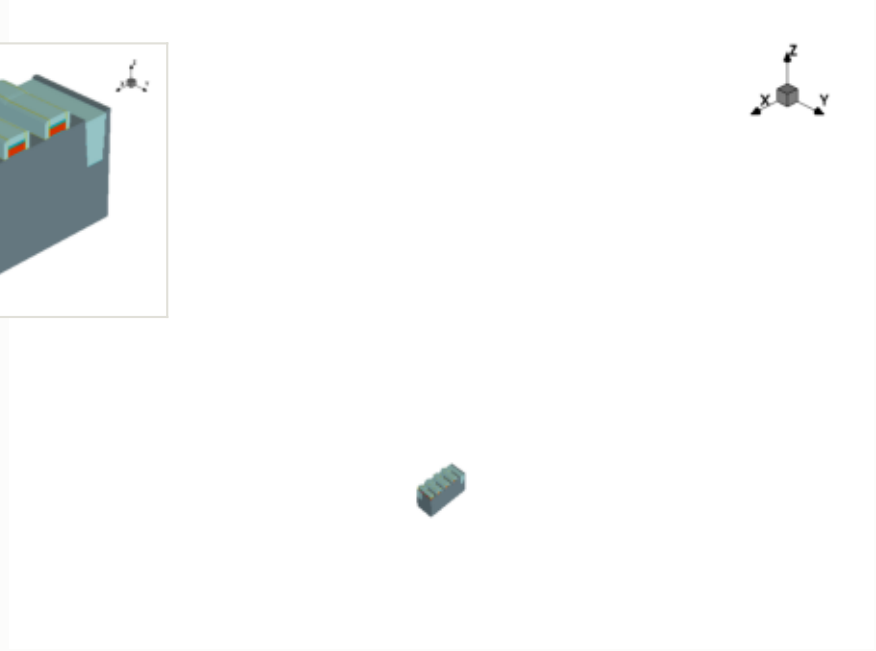


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

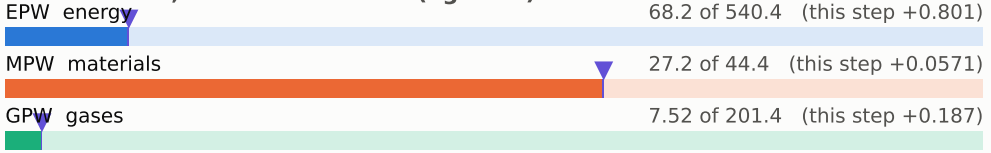


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

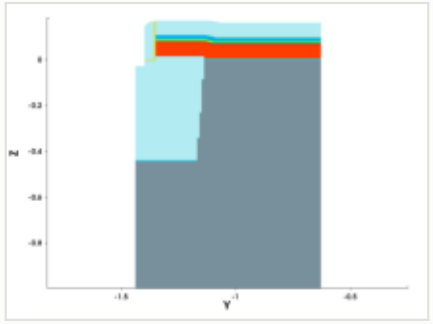


y cut at -1.035 µm

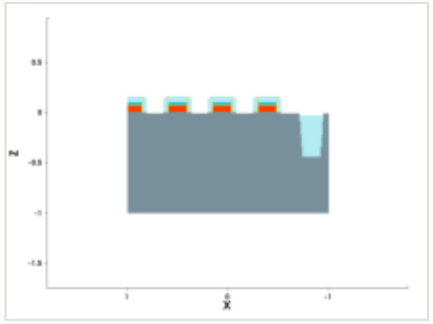


mask for this step

no mask for this step


steps by process area

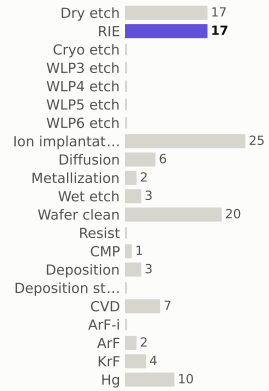

materials deposited (g)



gases emitted (g)

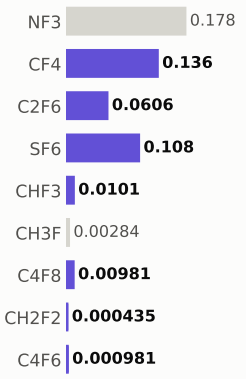


Step #1240: KrF

litho_patterning · KrF

0.199	103.2	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

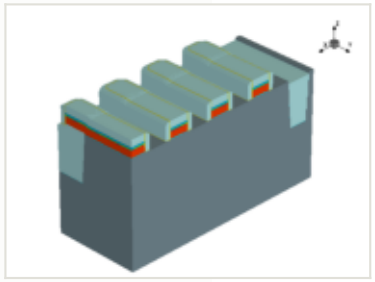




this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

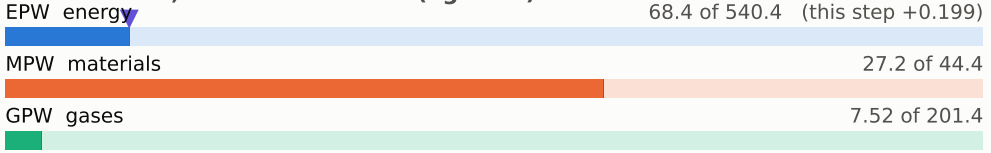


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

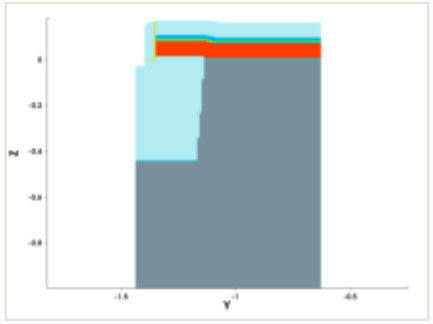


y cut at -1.035 µm

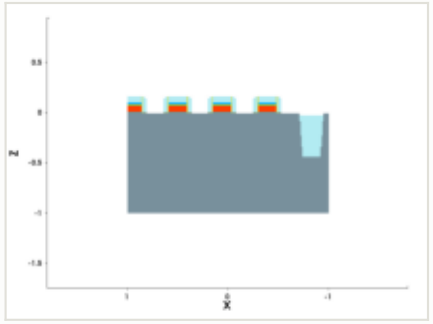


mask: layer 17:0 (OASIS)




steps by process area

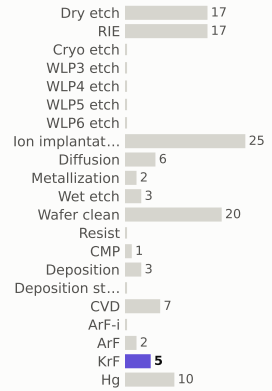

materials deposited (g)

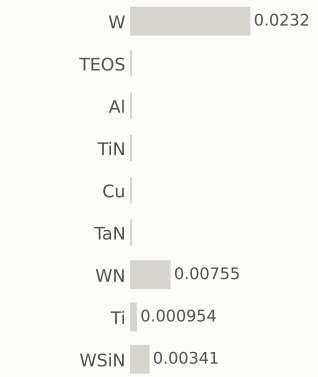

gases emitted (g)

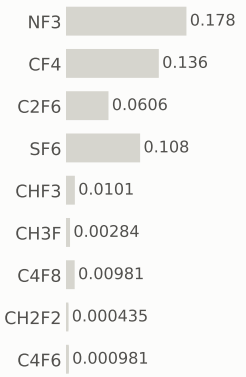


Step #1250: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	104.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

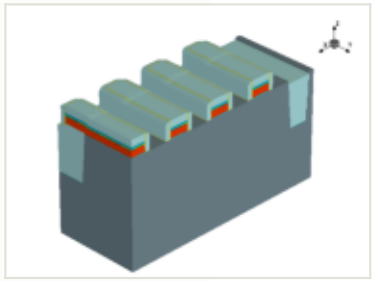




x cut at 0.000 µm

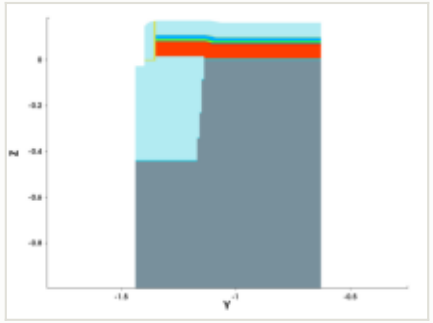

y cut at -1.035 µm

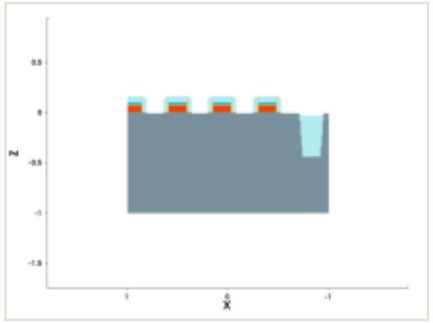

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

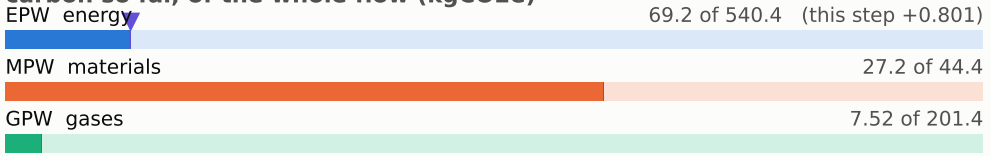


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

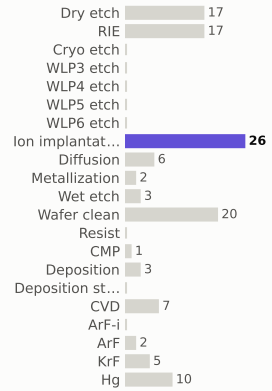

materials deposited (g)



gases emitted (g)

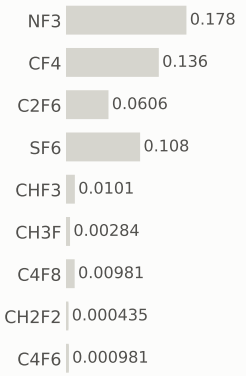


Step #1260: Ion_implantation

implant_ellipsoid · Ion_implantation

0.801	104.8	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

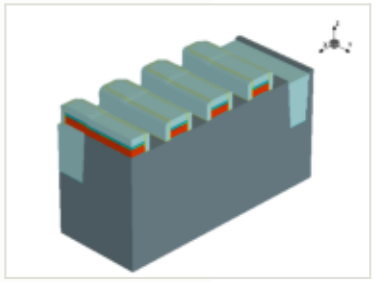




x cut at 0.000 µm

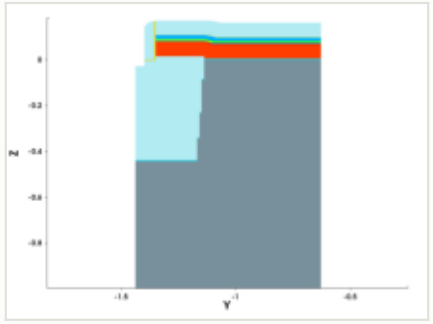

y cut at -1.035 µm

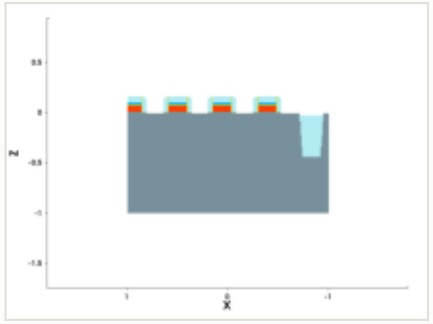

mask for this step

no mask for this step


this step

process area	Ion_implantation
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

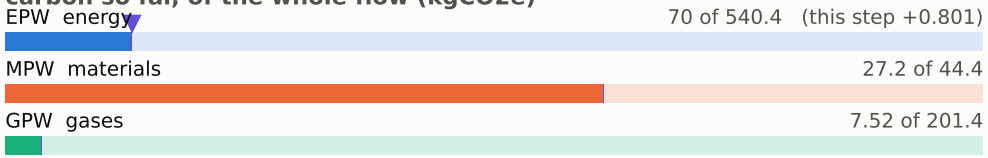


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

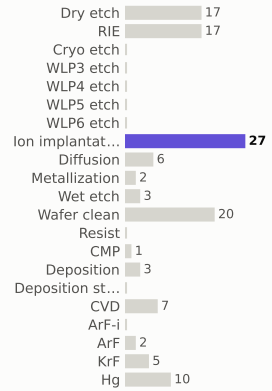

materials deposited (g)

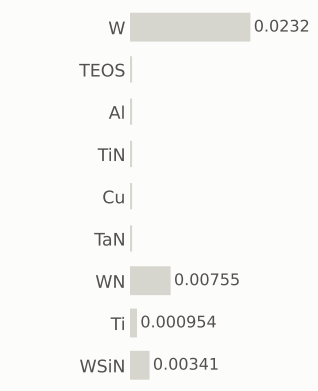

gases emitted (g)

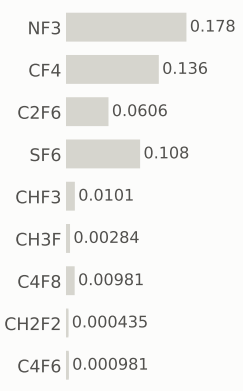


Step #1270: Dry_etch

etch_strip · Dry_etch

0.801	105.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

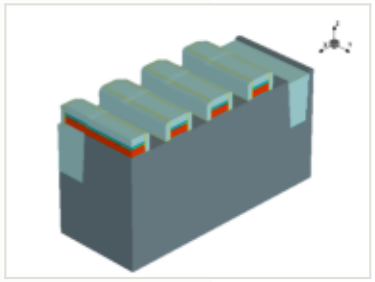






x cut at 0.000 µm

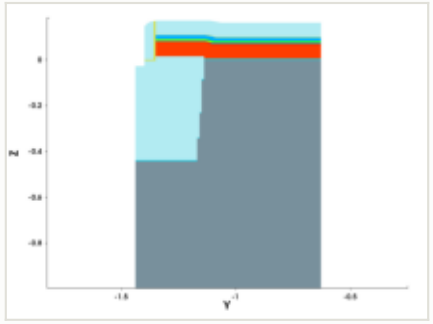

y cut at -1.035 µm

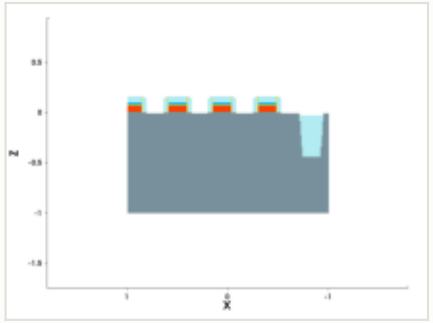


mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

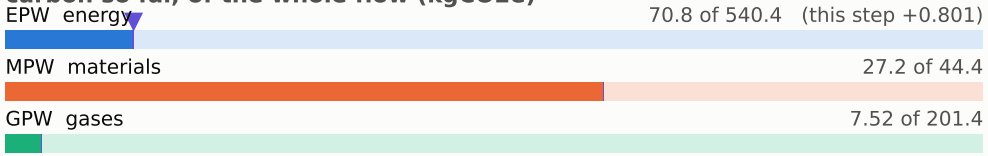


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

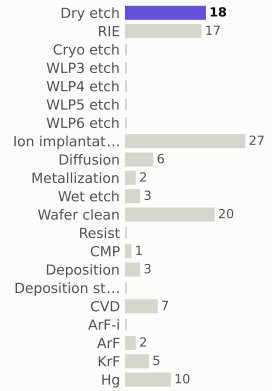

materials deposited (g)

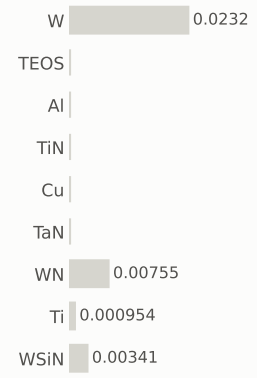

gases emitted (g)

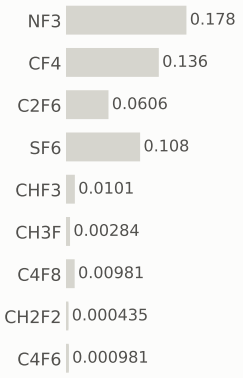


Step #1280: Wafer_clean

clean · Wafer_clean

0.169	105.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

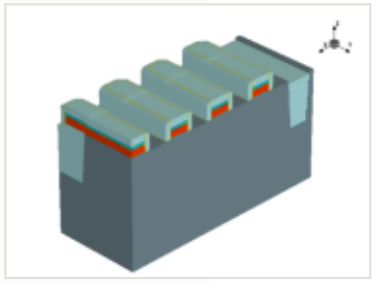




x cut at 0.000 µm

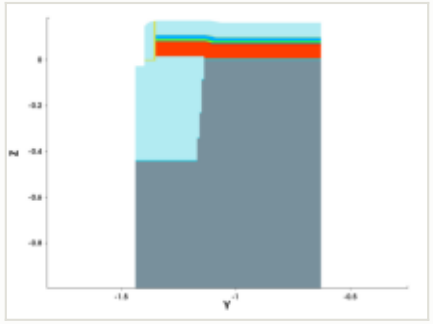

y cut at -1.035 µm

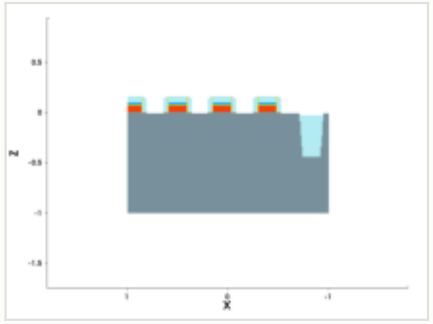

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

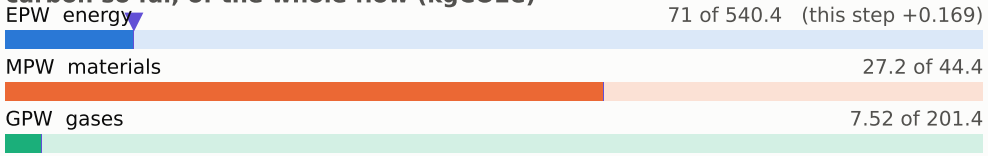


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

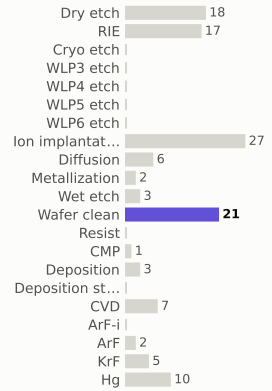

materials deposited (g)

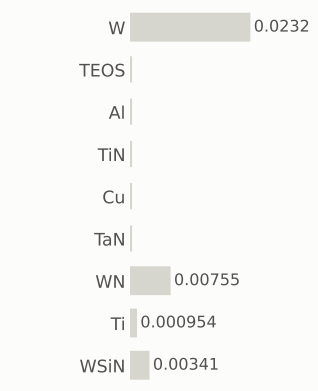

gases emitted (g)

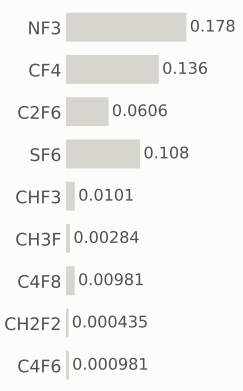


Step #1290: KrF


litho_patterning · KrF

0.199	105.9	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

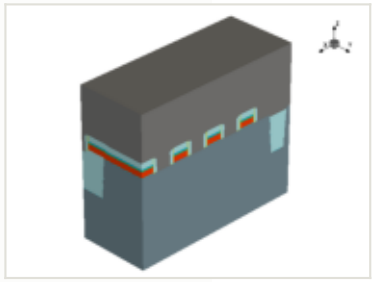

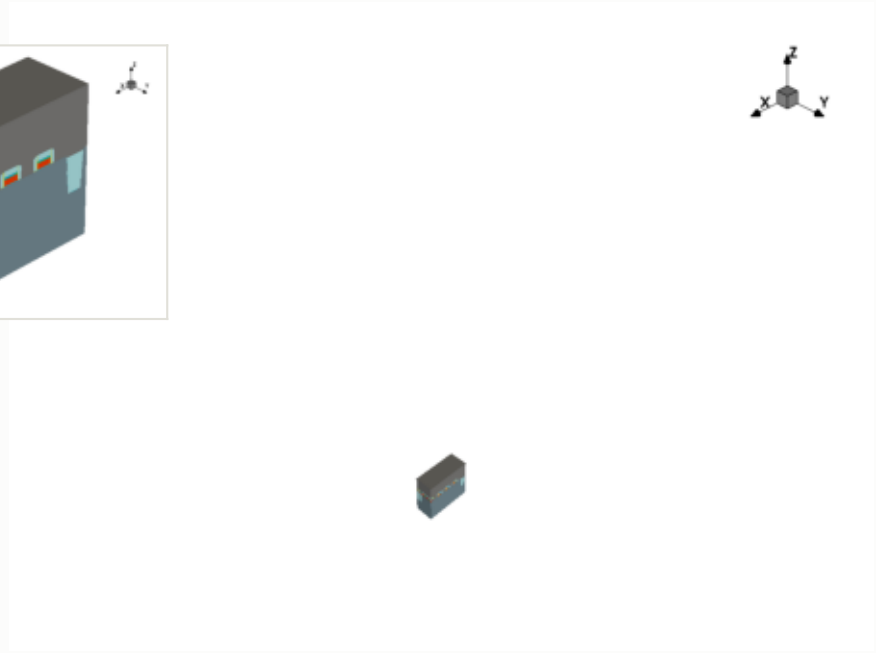


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

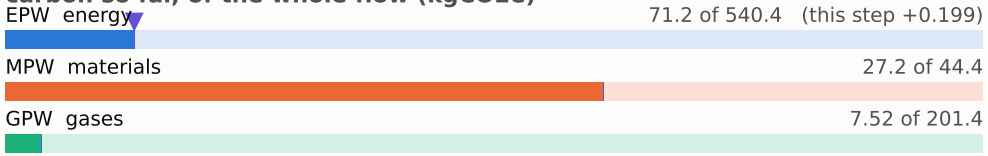


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

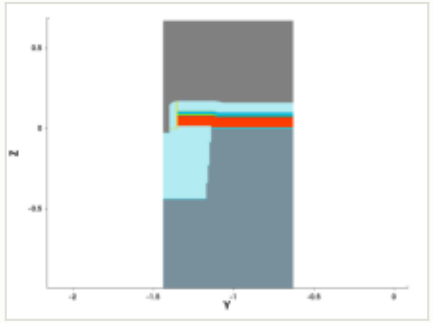


y cut at -1.035 µm

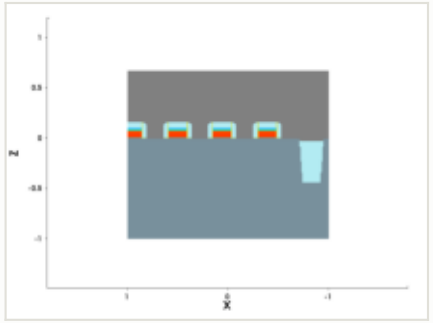


mask: layer 18:0, positive (OASIS)




steps by process area

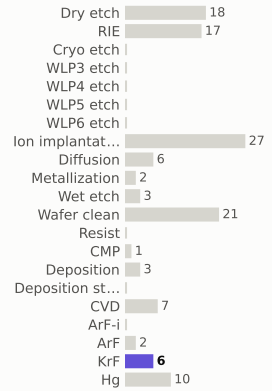

materials deposited (g)

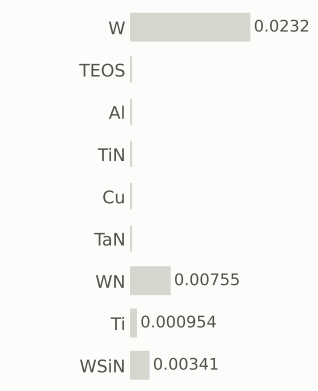

gases emitted (g)

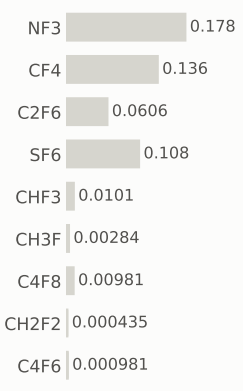


Step #1300: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	106.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

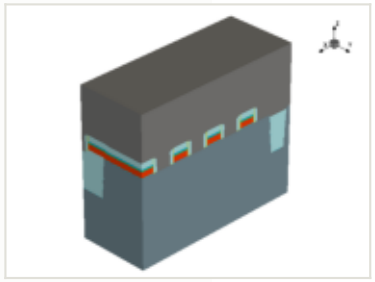


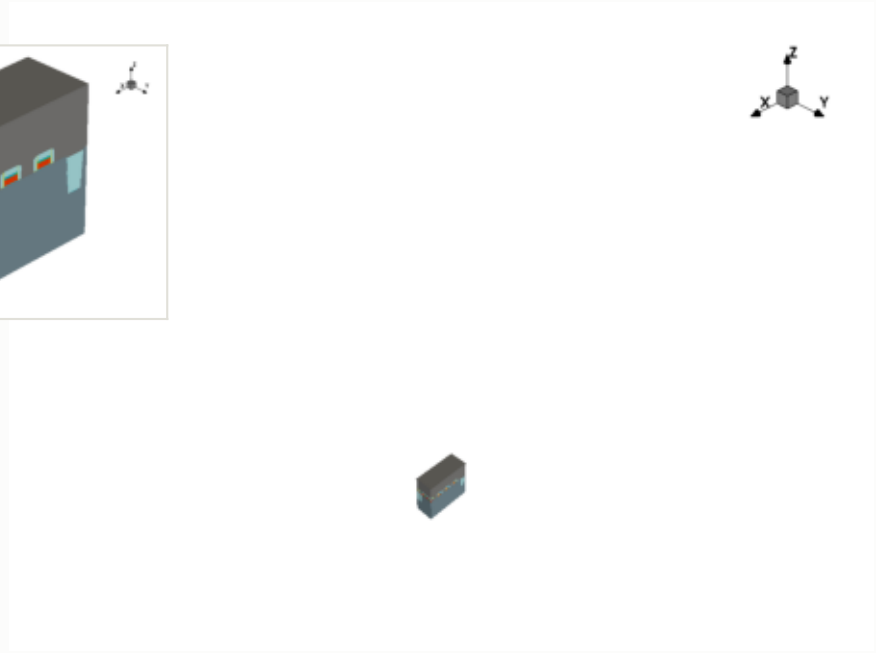

x cut at 0.000 µm

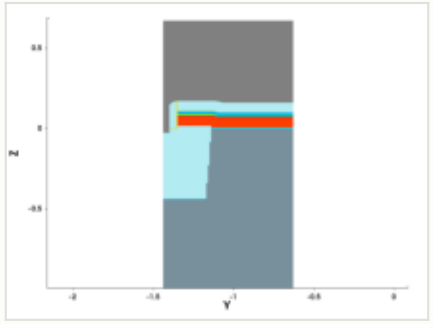

y cut at -1.035 µm

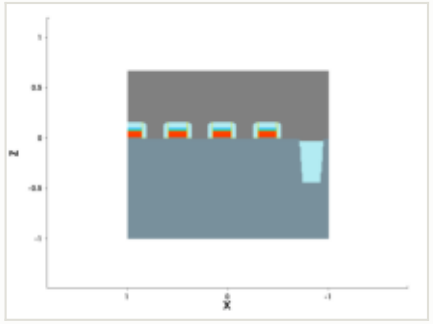

mask for this step


no mask for this step

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

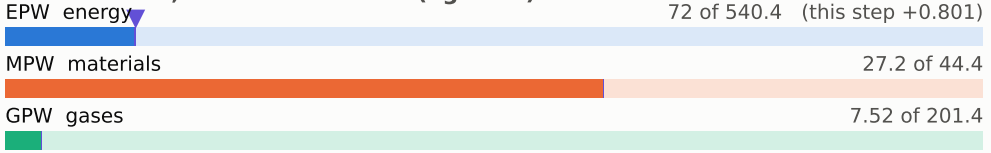


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

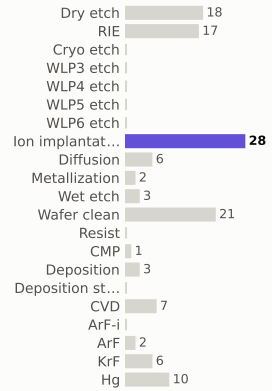

materials deposited (g)

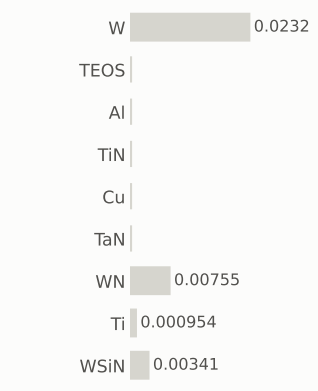

gases emitted (g)

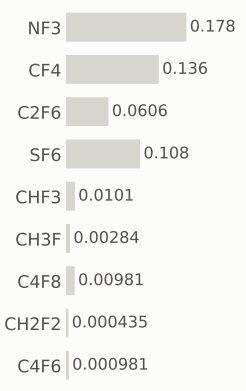


Step #1310: Dry_etch

etch_strip · Dry_etch

0.801	107.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

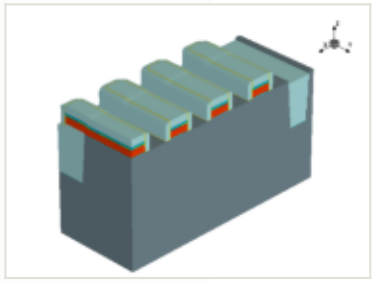






x cut at 0.000 µm

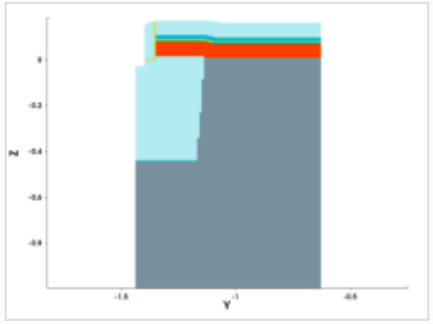

y cut at -1.035 µm

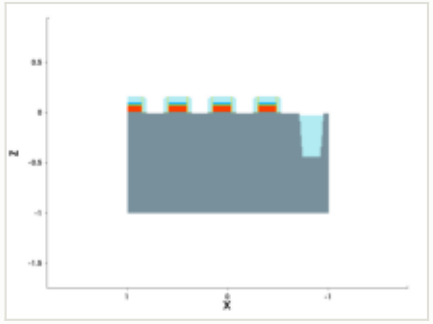


mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

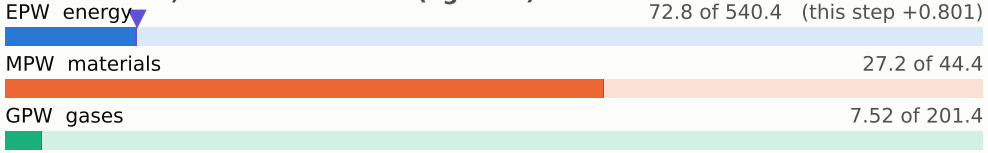


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

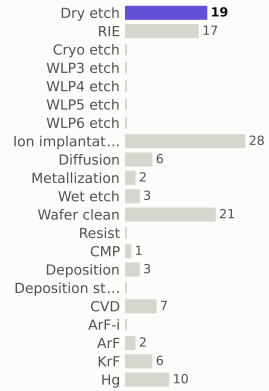

materials deposited (g)

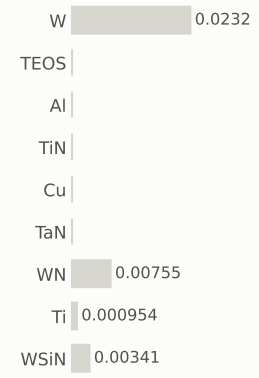

gases emitted (g)

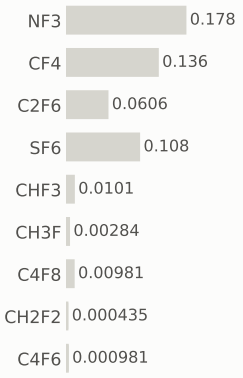


Step #1320: Wafer_clean

clean · Wafer_clean

0.169	107.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

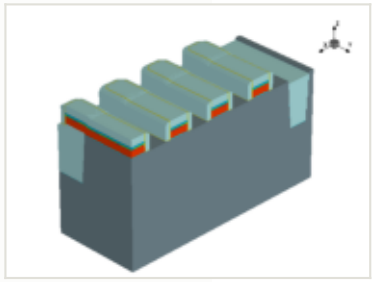






x cut at 0.000 µm

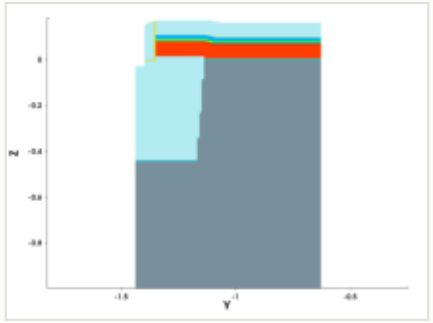

y cut at -1.035 µm

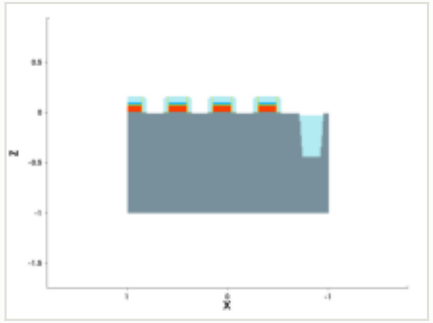

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

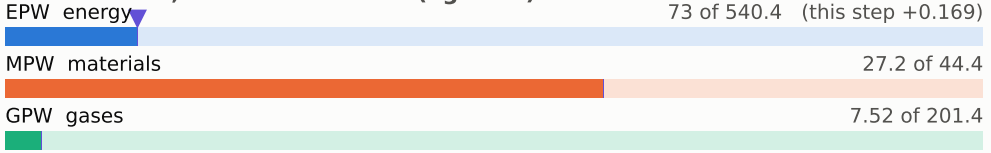


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

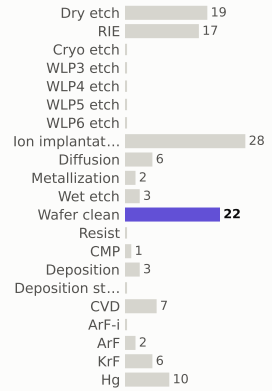

materials deposited (g)

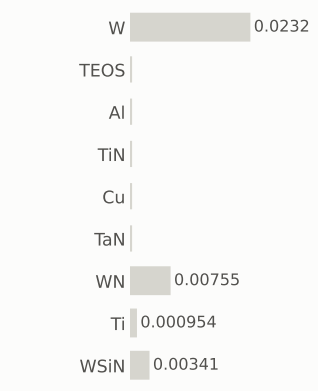

gases emitted (g)

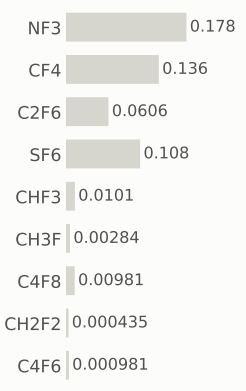


Step #1330: Diffusion

anneal · Diffusion

0.801	108.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

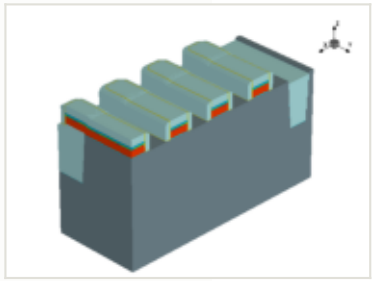






x cut at 0.000 µm

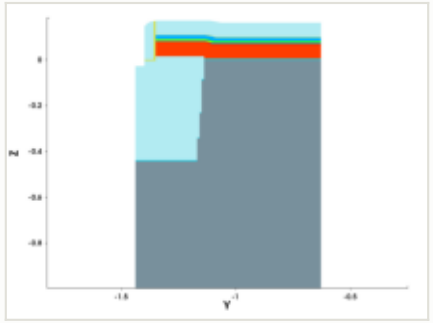

y cut at -1.035 µm

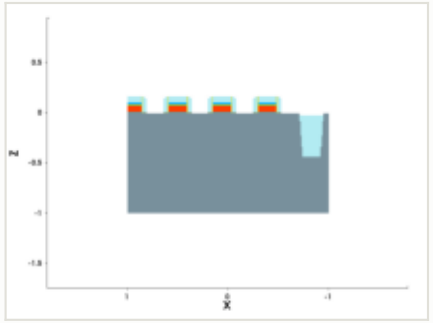

mask for this step

no mask for this step


this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp


carbon so far, of the whole flow (kgCO2e)

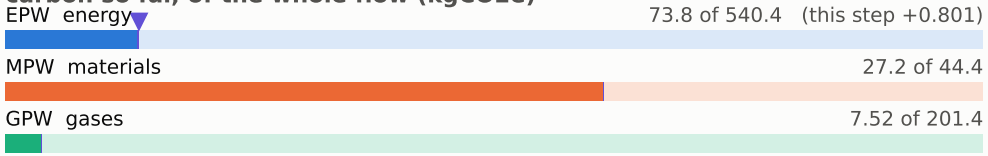


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

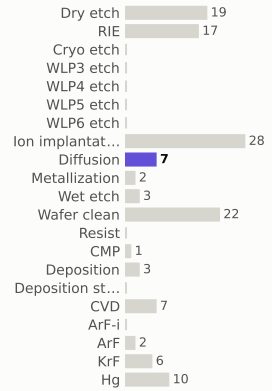

materials deposited (g)

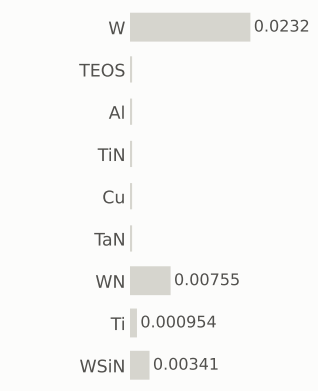

gases emitted (g)

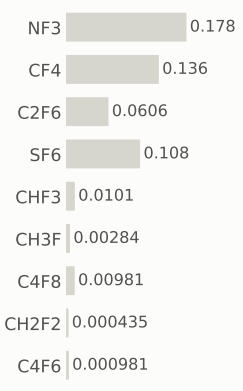


Step #1350: CVD

depo_isotropic · CVD

1.31	109.8	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

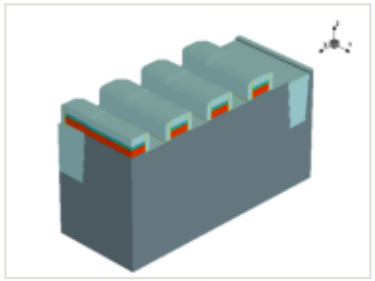




this step

process area	CVD
material	—
thickness	0.003 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

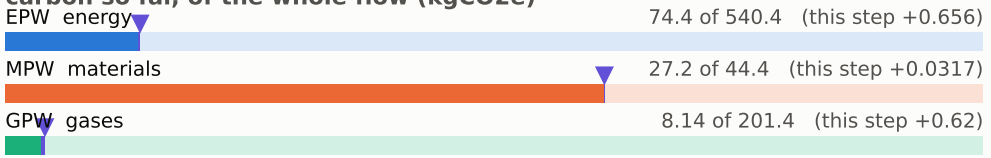


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

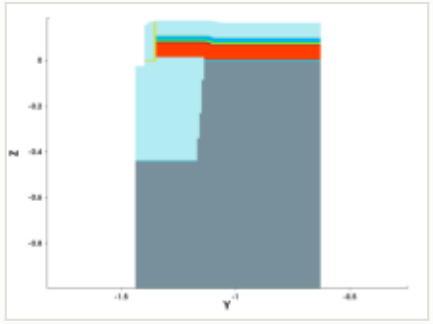


y cut at -1.035 µm

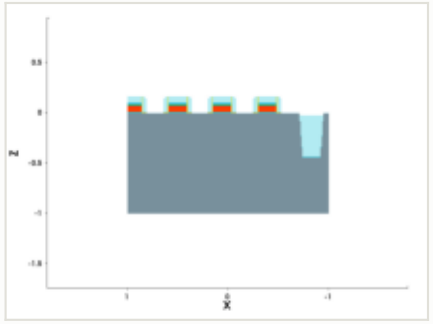


mask for this step

no mask for this step


steps by process area

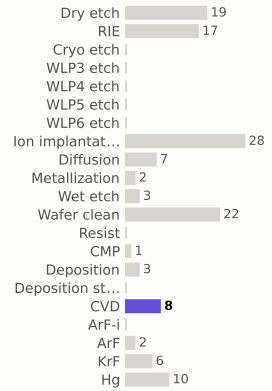

materials deposited (g)

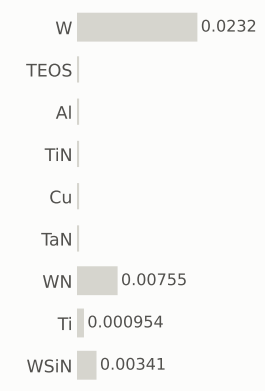

gases emitted (g)

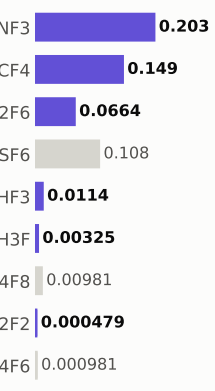


Step #1360: CVD

depo_isotropic · CVD

1.31	111.1	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

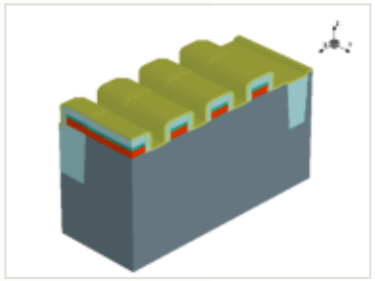






this step

process area	CVD
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

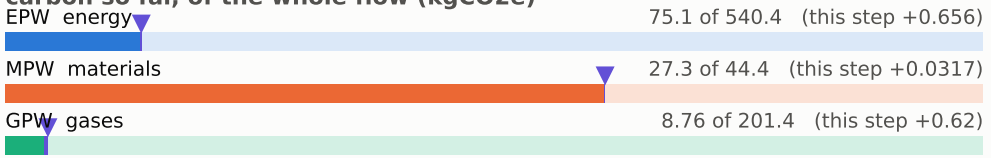


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

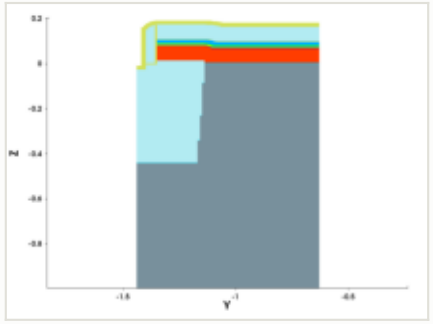


y cut at -1.035 µm

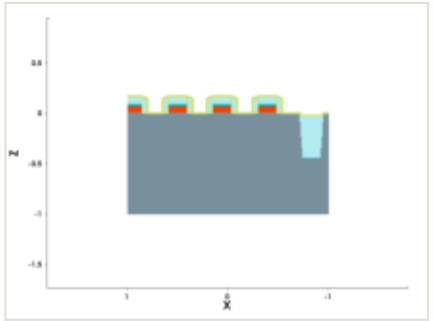


mask for this step

no mask for this step


steps by process area

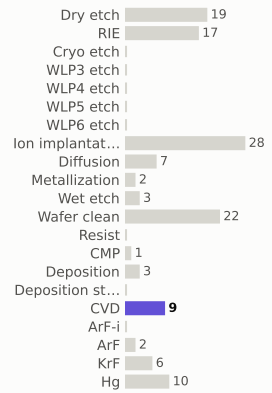

materials deposited (g)

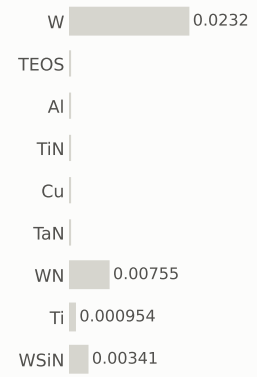

gases emitted (g)




Step #1370: CVD


depo_isotropic · CVD

1.31	112.4	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

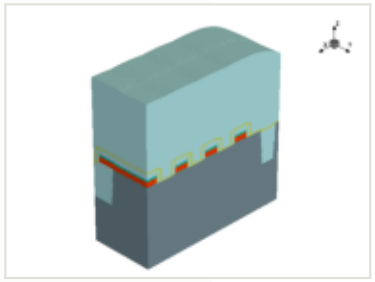

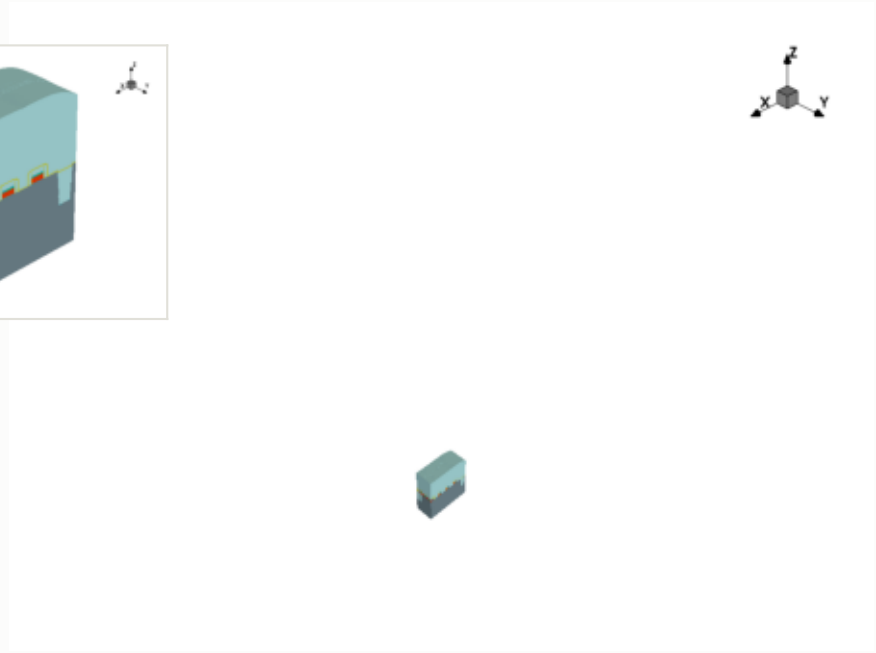


this step

process area	CVD
material	—
thickness	0.8 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

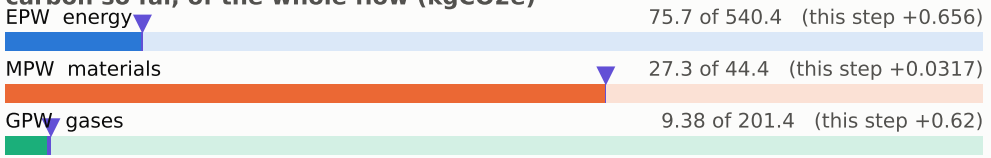


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

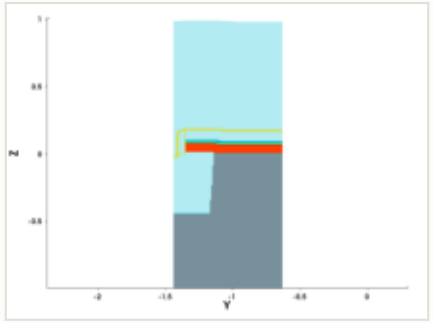


y cut at -1.035 µm

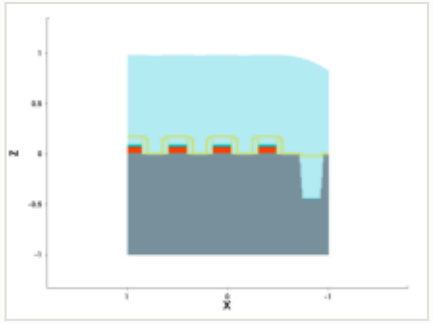


mask for this step

no mask for this step


steps by process area

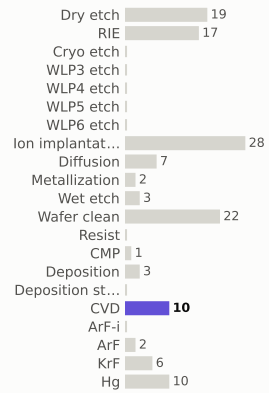

materials deposited (g)



gases emitted (g)

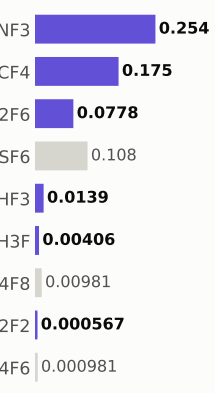


Step #1380: CMP

etch_cmp · CMP

0.169	112.6	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

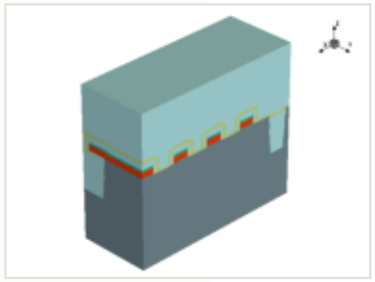






x cut at 0.000 µm

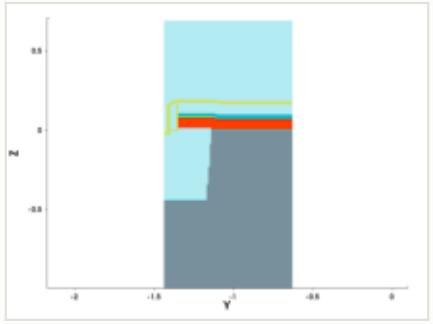

y cut at -1.035 µm

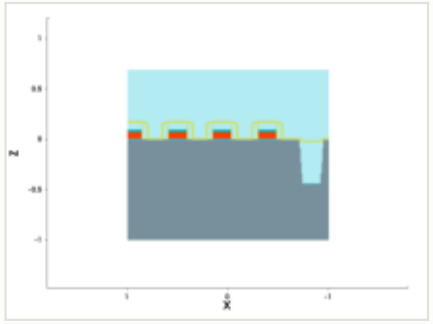

mask for this step


no mask for this step

this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

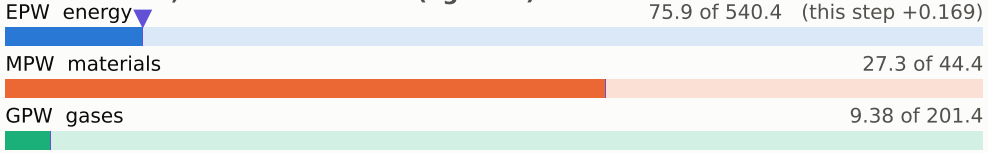


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

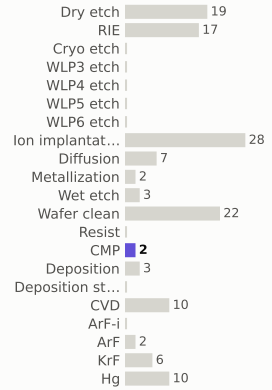

materials deposited (g)

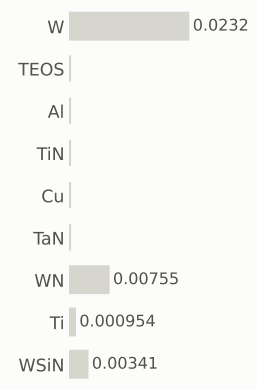

gases emitted (g)




Step #1390: Wafer_clean

clean · Wafer_clean

0.169	112.8	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

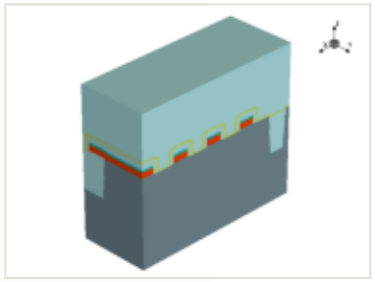






x cut at 0.000 µm

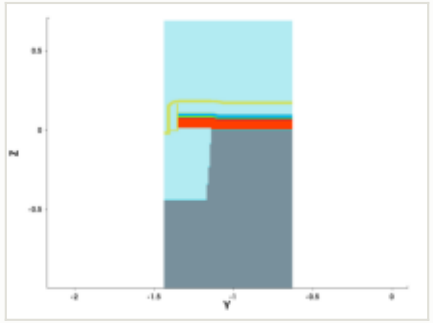

y cut at -1.035 µm

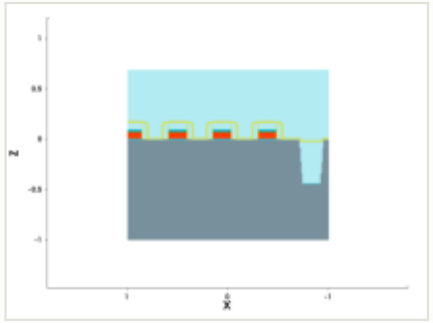

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

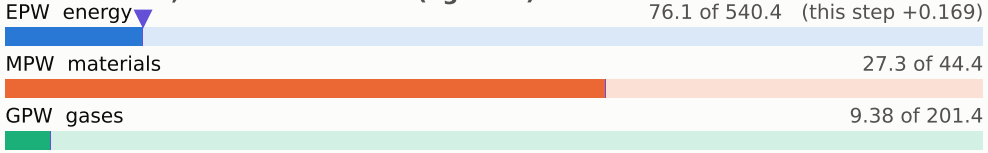


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

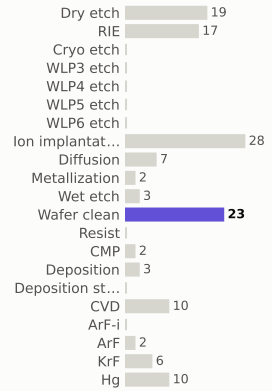

materials deposited (g)

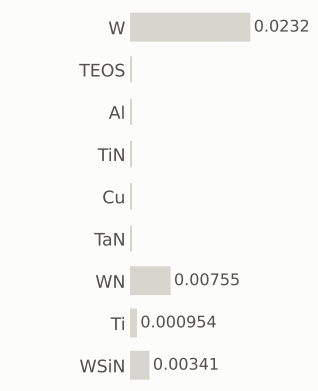

gases emitted (g)

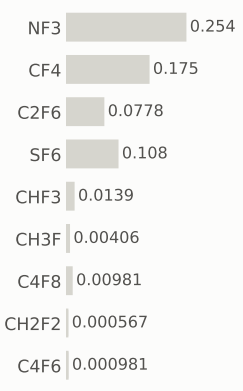


Step #1400: ArF

litho_patterning · ArF


0.199	113.0	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

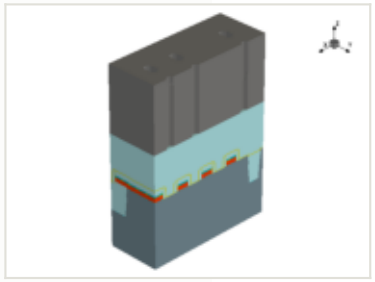






this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

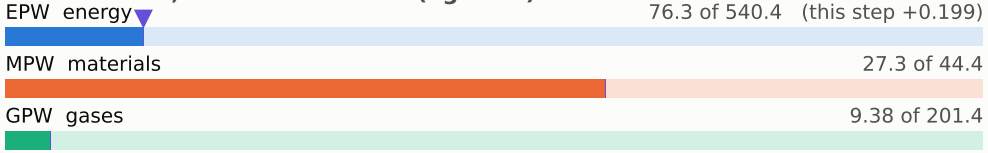


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

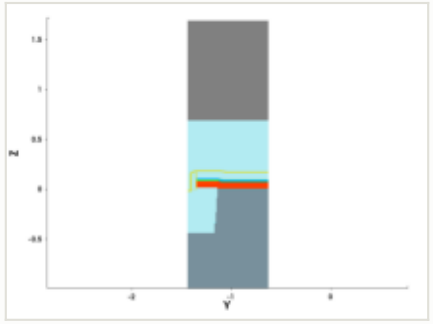


y cut at -1.035 µm

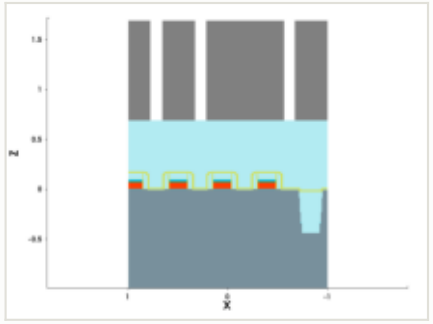


mask: layer 19:0 (OASIS)




steps by process area

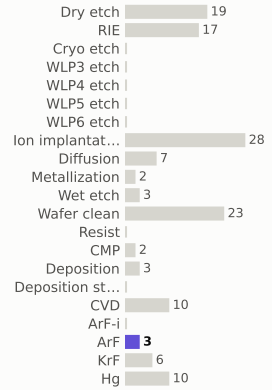

materials deposited (g)

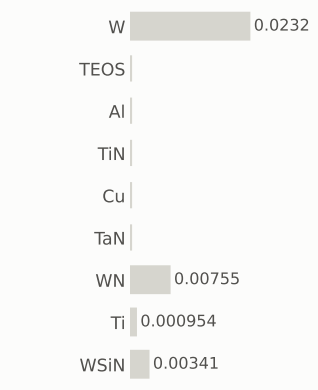

gases emitted (g)

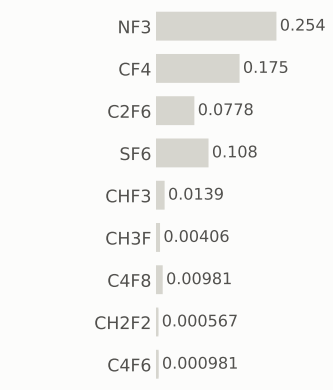


Step #1410: RIE

etch_anisotropic · RIE


1.04	114.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

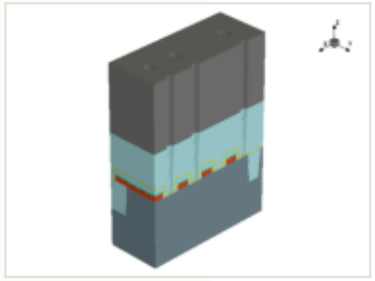






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

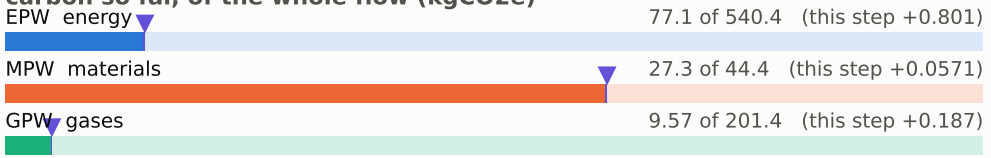


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

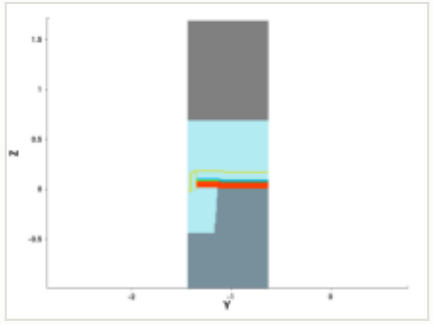


y cut at -1.035 µm

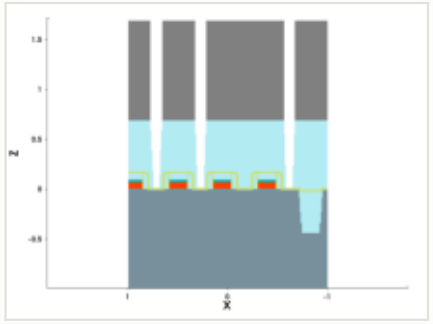


mask for this step

no mask for this step


steps by process area

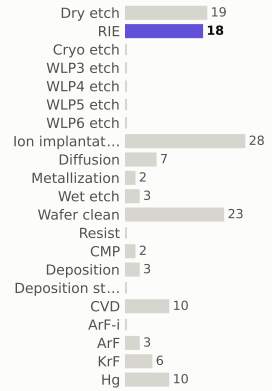

materials deposited (g)

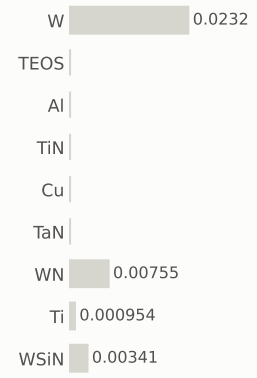

gases emitted (g)

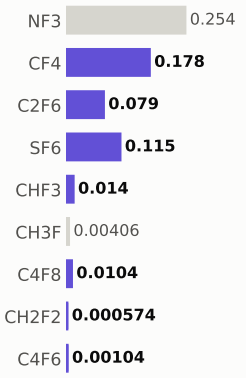


Step #1420: RIE

etch_anisotropic · RIE


1.04	115.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

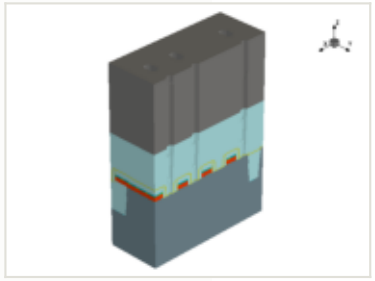






x cut at 0.000 µm

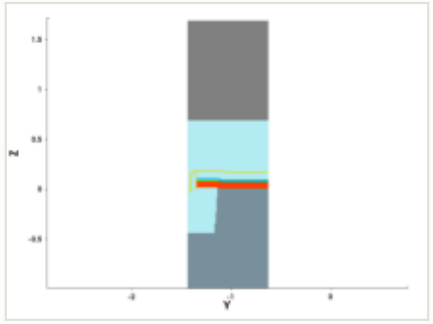

y cut at -1.035 µm

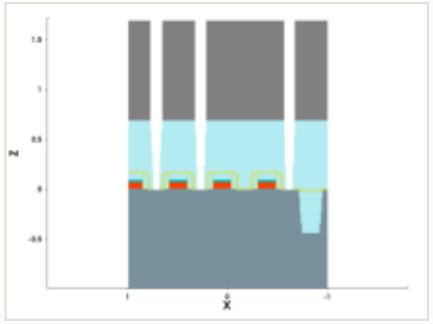

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

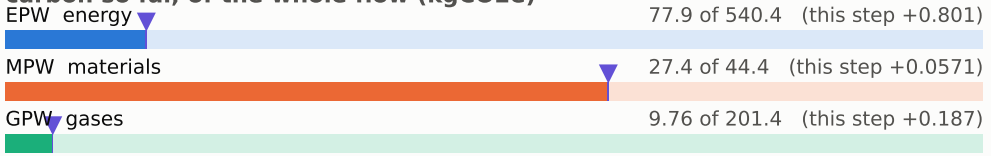


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

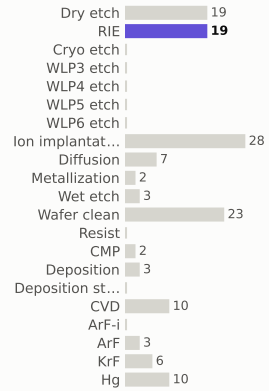

materials deposited (g)

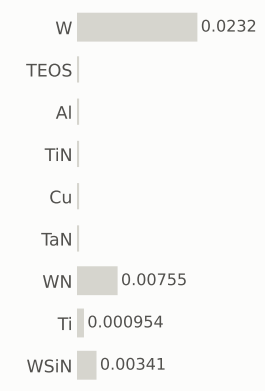

gases emitted (g)

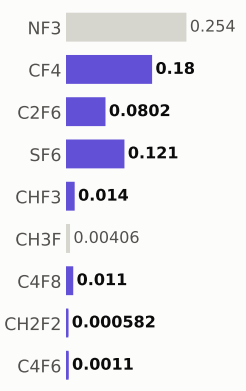


Step #1430: RIE

etch_anisotropic · RIE


1.04	116.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

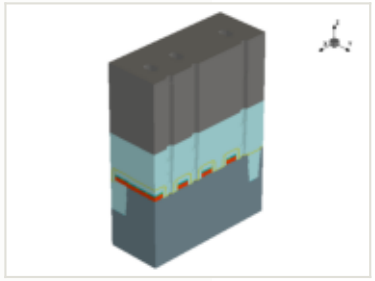






x cut at 0.000 µm

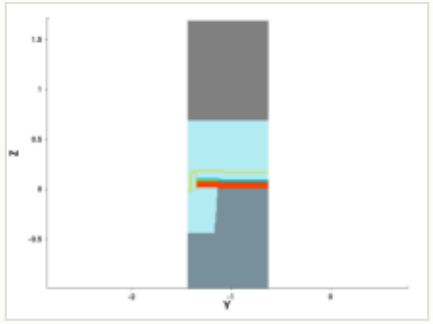

y cut at -1.035 µm

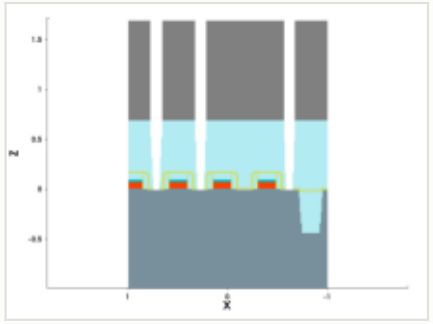

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

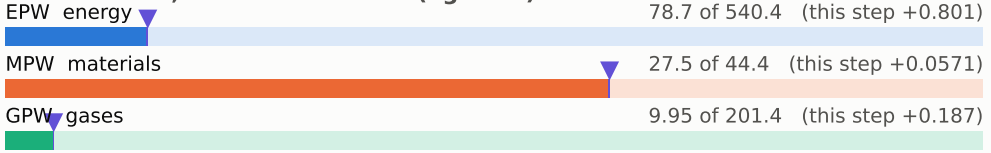


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

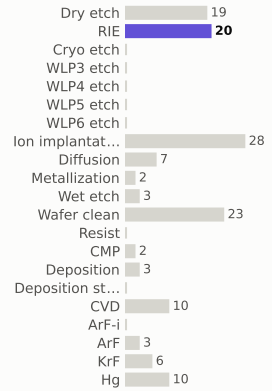

materials deposited (g)

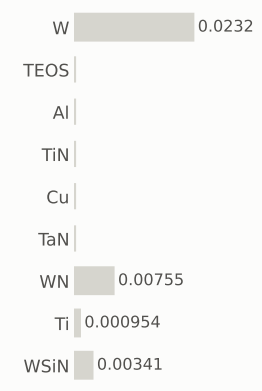

gases emitted (g)

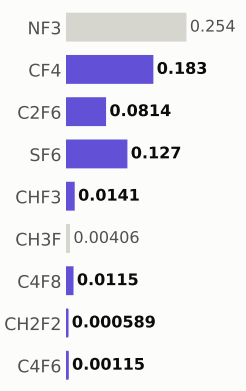


Step #1440: RIE

etch_anisotropic · RIE


1.04	117.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

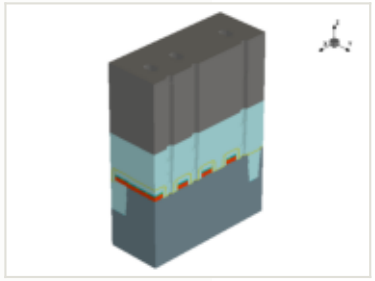






x cut at 0.000 µm

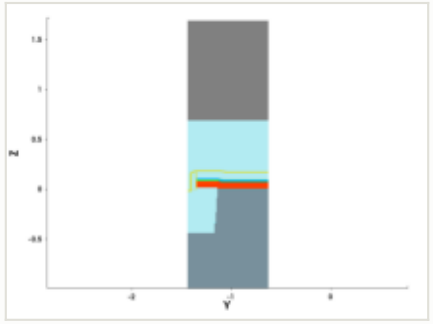

y cut at -1.035 µm

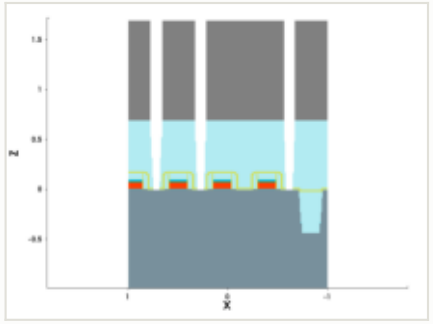

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

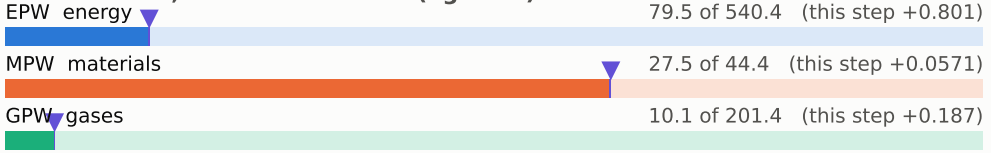


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

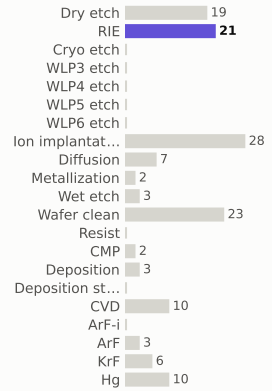

materials deposited (g)

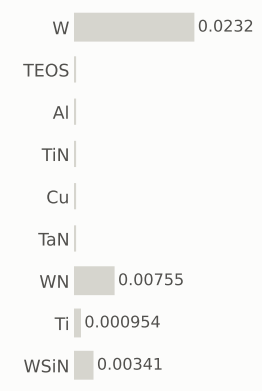

gases emitted (g)

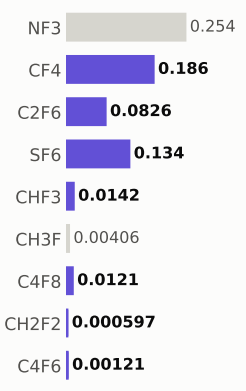


Step #1450: Dry_etch

etch_strip · Dry_etch

0.801	117.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

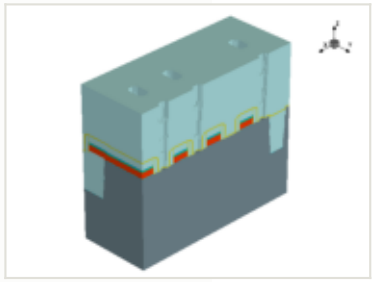






x cut at 0.000 µm

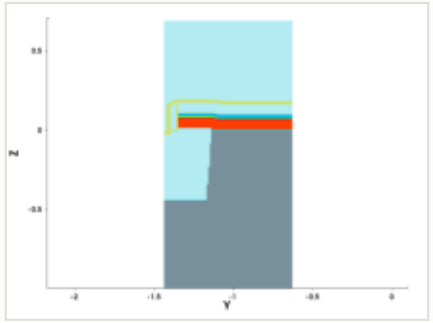

y cut at -1.035 µm

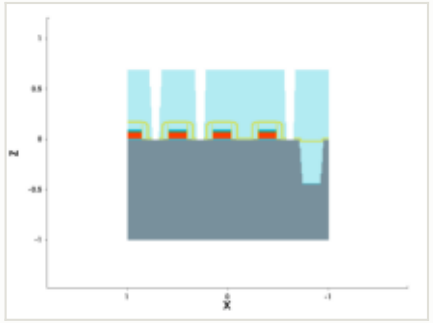


mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

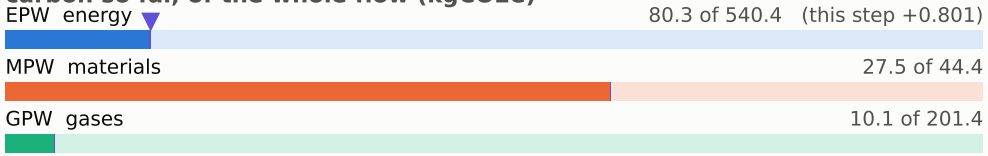


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

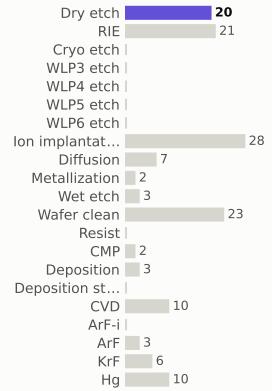

materials deposited (g)

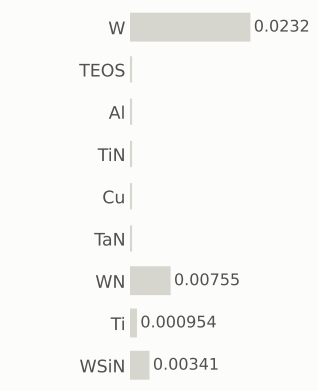

gases emitted (g)

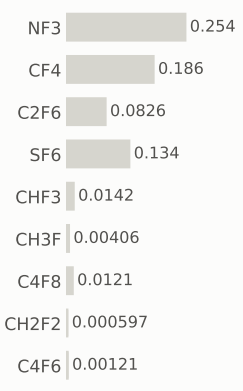


Step #1460: Wafer_clean

clean · Wafer_clean

0.169	118.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

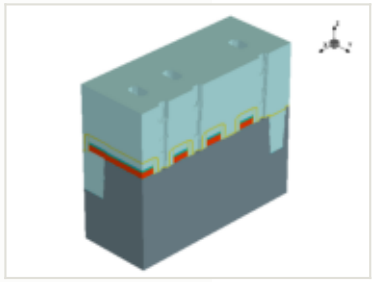






x cut at 0.000 µm

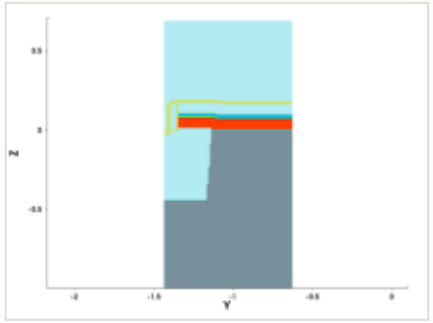

y cut at -1.035 µm

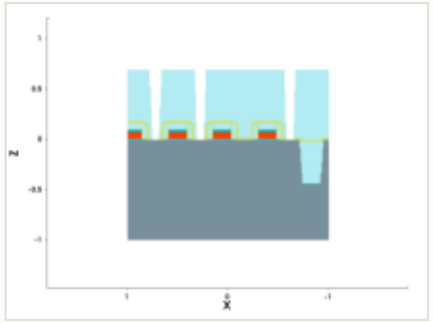

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

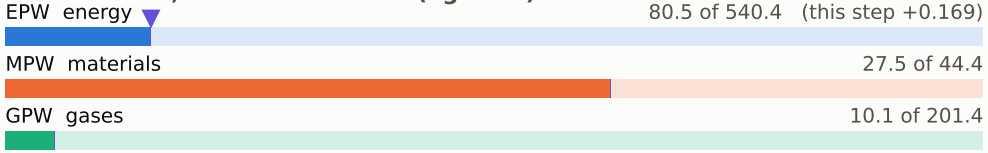


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

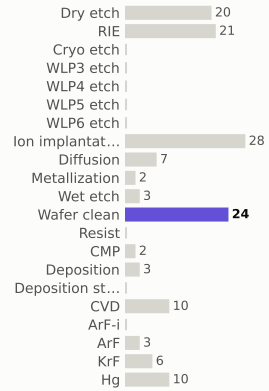

materials deposited (g)

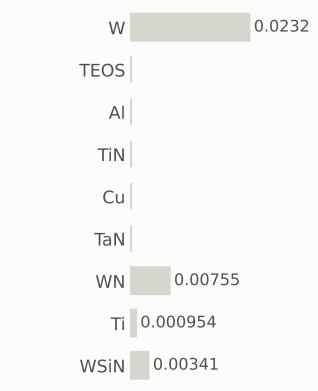

gases emitted (g)

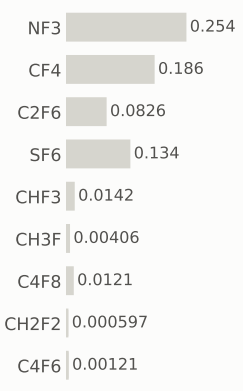


Step #1470: Diffusion

anneal · Diffusion

0.801	118.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

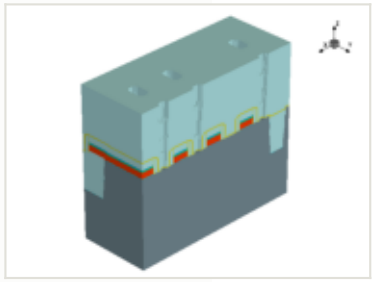






x cut at 0.000 µm

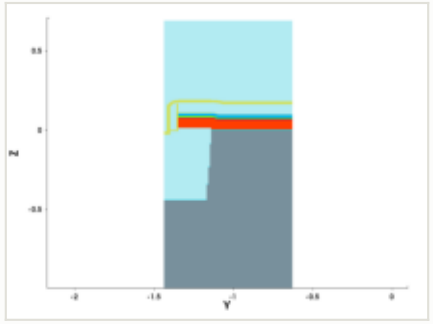

y cut at -1.035 µm

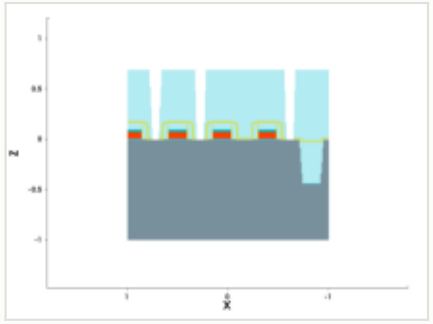

mask for this step

no mask for this step


this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp


carbon so far, of the whole flow (kgCO2e)

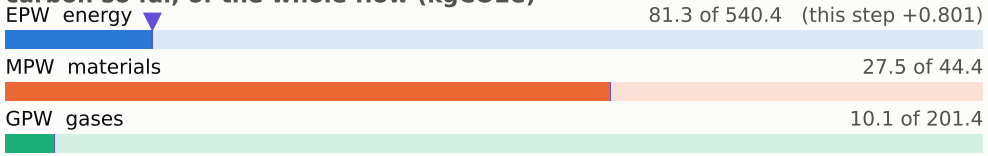


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

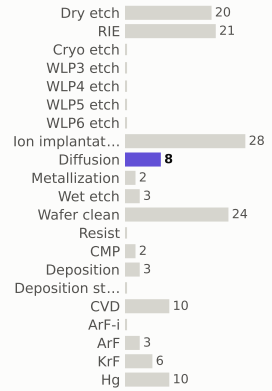

materials deposited (g)

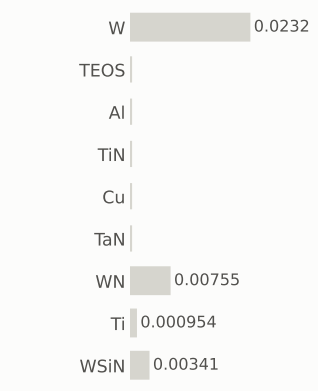

gases emitted (g)

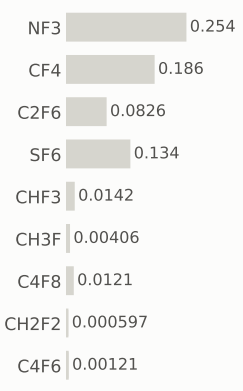


Step #1480: Diffusion

anneal · Diffusion

0.801	119.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

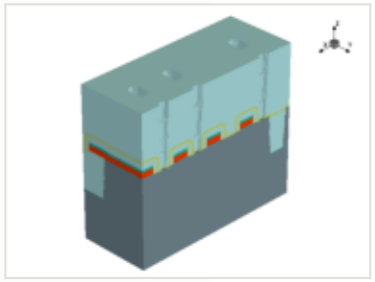






x cut at 0.000 µm

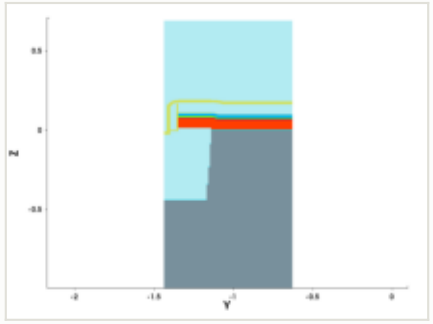

y cut at -1.035 µm

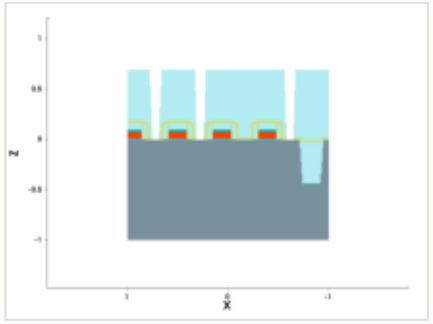

mask for this step

no mask for this step


this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp


carbon so far, of the whole flow (kgCO2e)

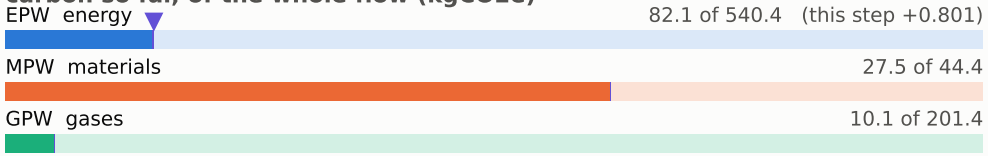


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

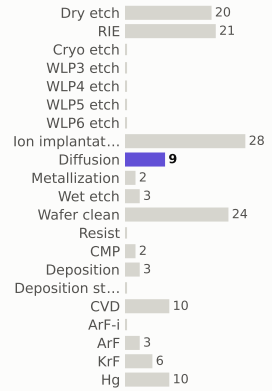

materials deposited (g)

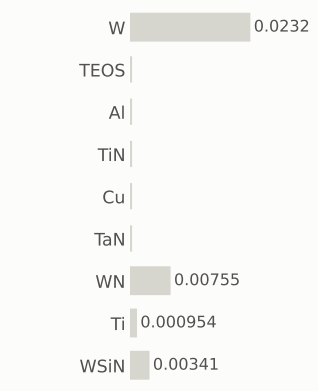

gases emitted (g)

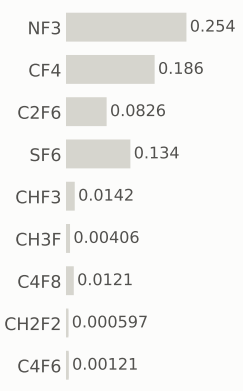


Step #1490: Wet_etch

implant_ellipsoid · Wet_etch

0.169	119.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

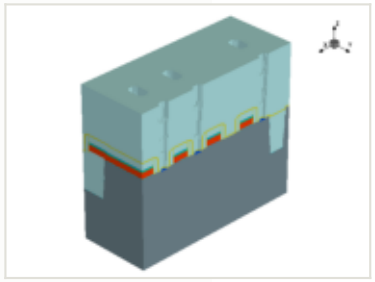






x cut at 0.000 µm

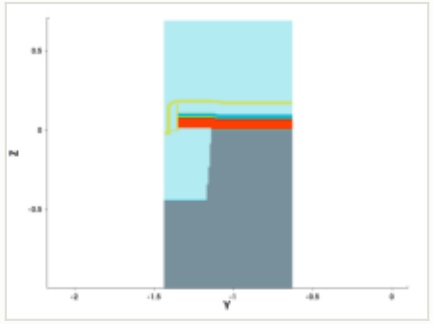

y cut at -1.035 µm

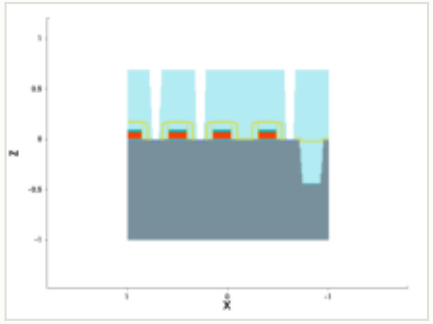


mask for this step

no mask for this step

this step

process area	Wet_etch	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

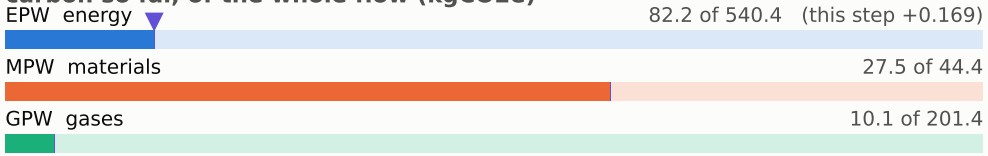


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

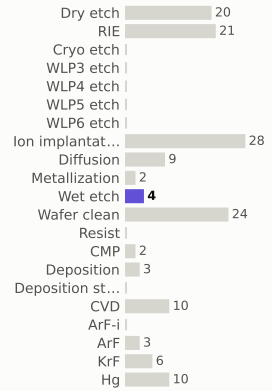

materials deposited (g)

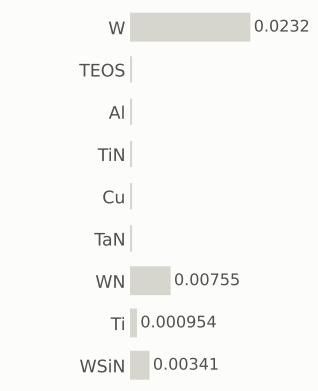

gases emitted (g)

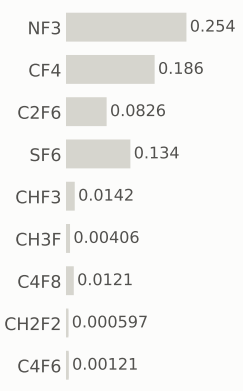


Step #1500: Wafer_clean

clean · Wafer_clean

0.169	120.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

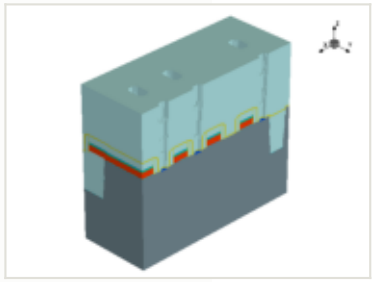






x cut at 0.000 µm

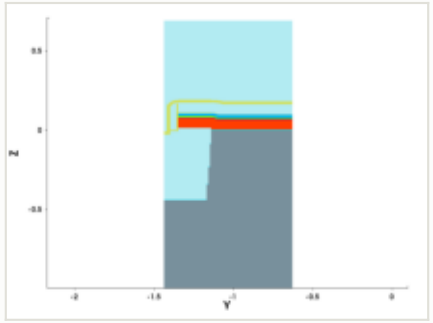

y cut at -1.035 µm

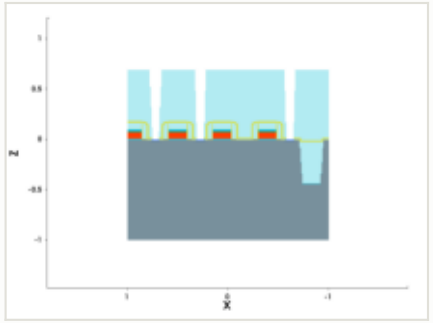

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

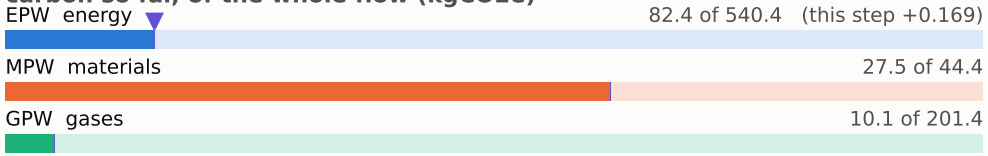


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

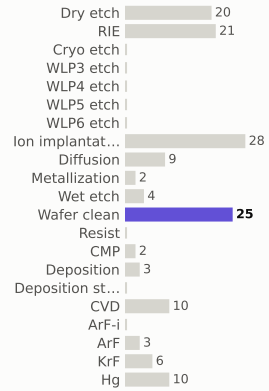

materials deposited (g)

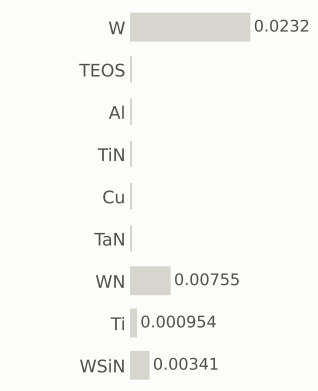

gases emitted (g)

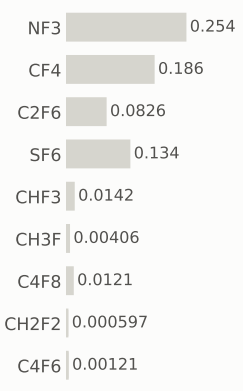


Step #1510: CVD

depo_isotropic · CVD

1.31	121.3	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

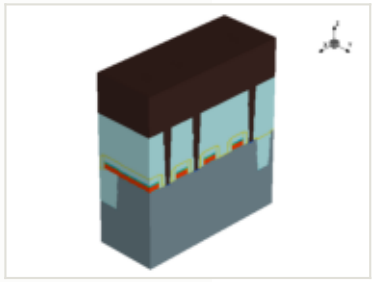






this step

process area	CVD
material	—
thickness	0.5 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

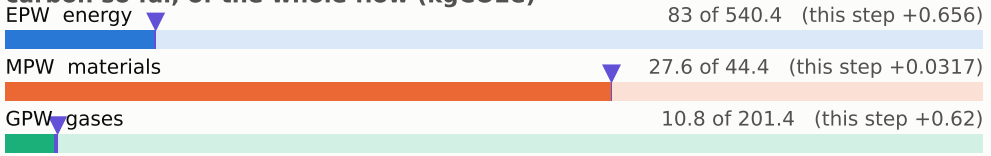


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

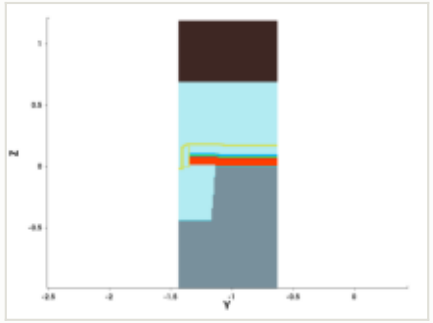


y cut at -1.035 µm

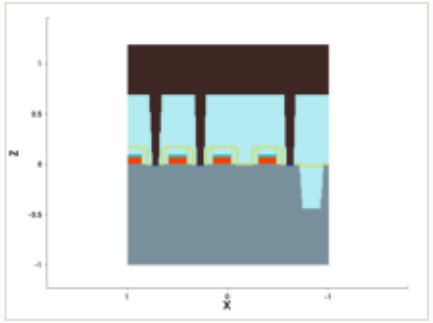


mask for this step

no mask for this step


steps by process area

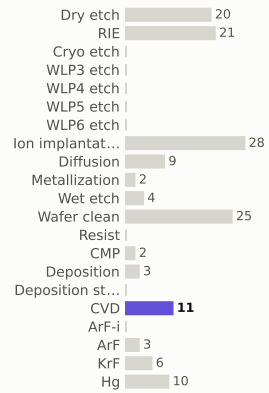

materials deposited (g)



gases emitted (g)

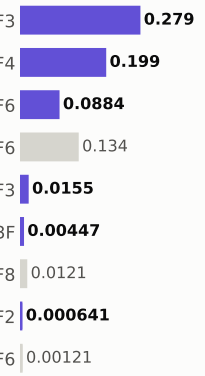


Step #1520: CVD


depo_isotropic · CVD

1.31	122.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

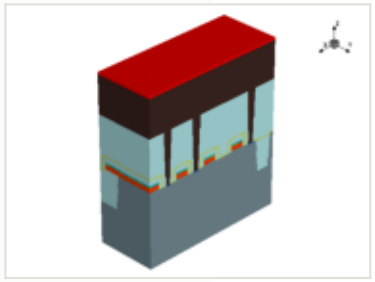

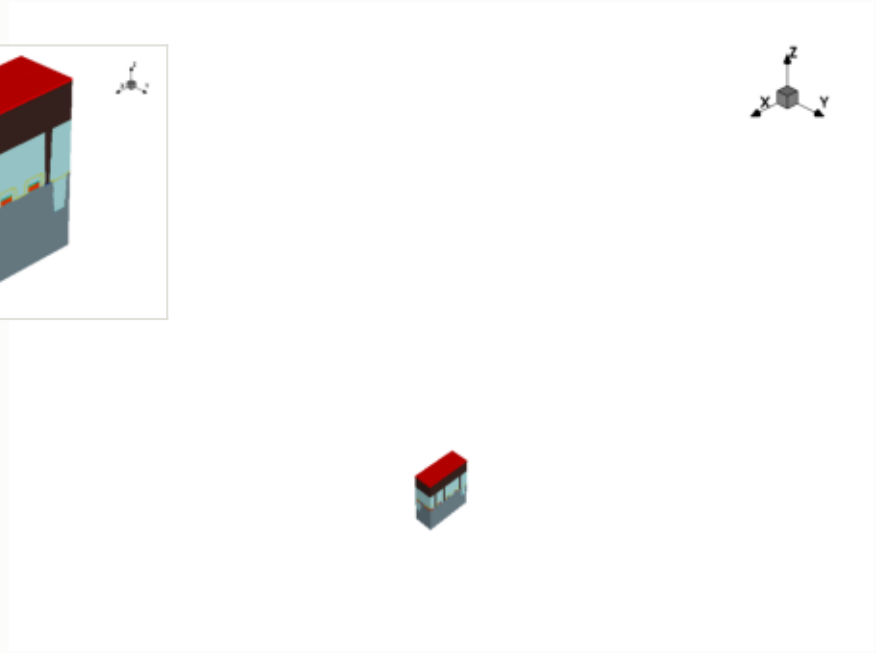


this step

process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

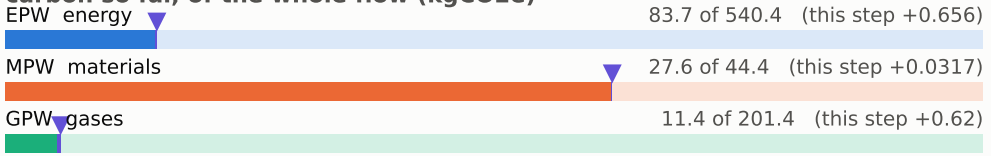


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

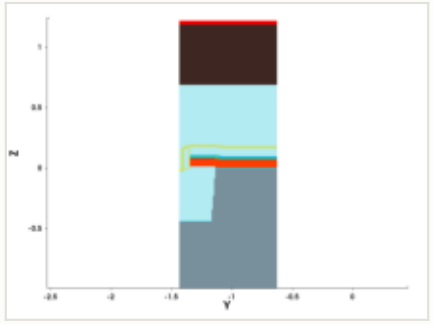


y cut at -1.035 µm

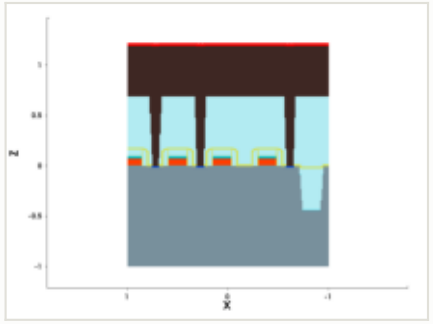


mask for this step

no mask for this step


steps by process area

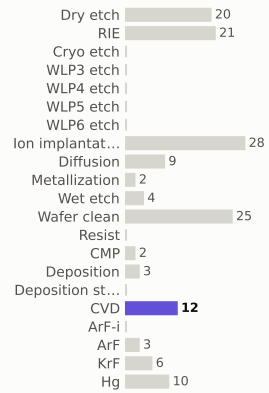

materials deposited (g)

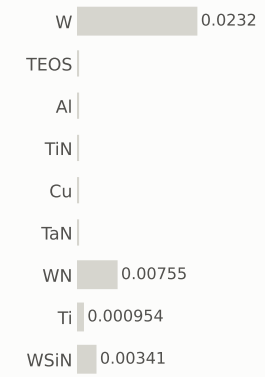

gases emitted (g)

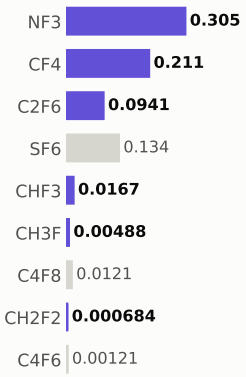


Step #1530: Wafer_clean


clean · Wafer_clean

0.169	122.8	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

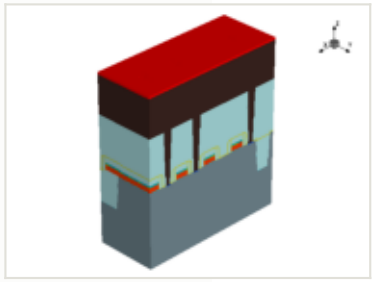


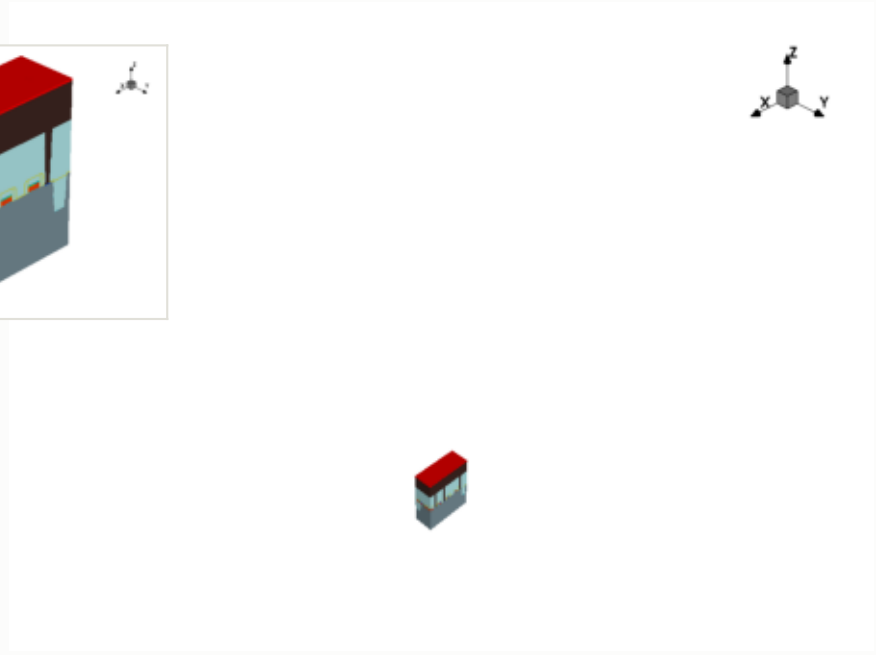

x cut at 0.000 µm

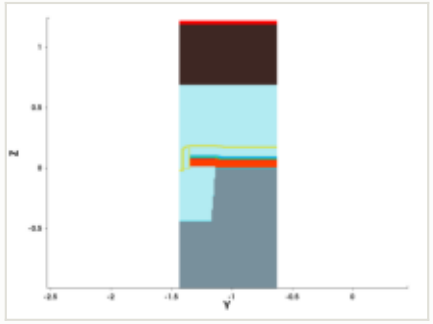

y cut at -1.035 µm

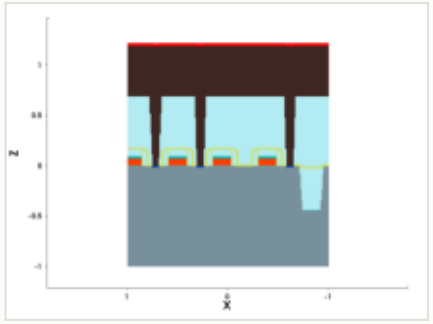

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

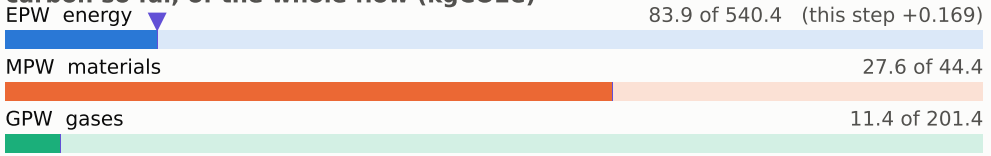


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

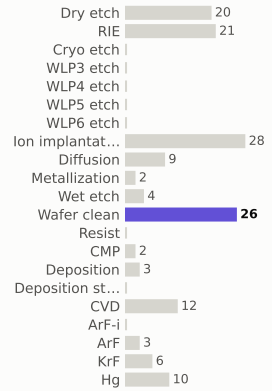

materials deposited (g)

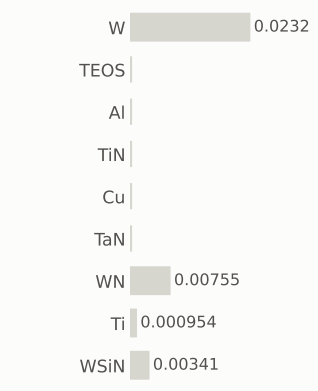

gases emitted (g)

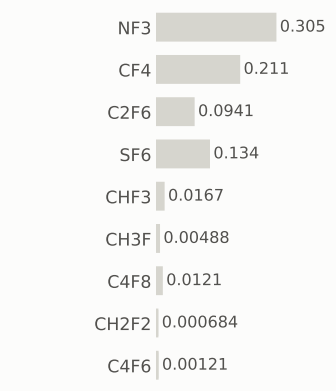


Step #1540: ArF-i


litho_patterning · ArF-i

0.217	123.0	0.028%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

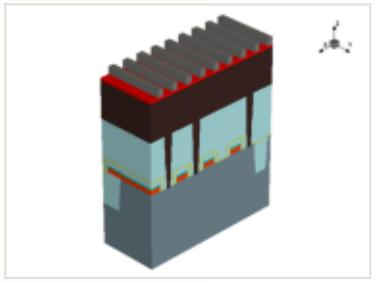

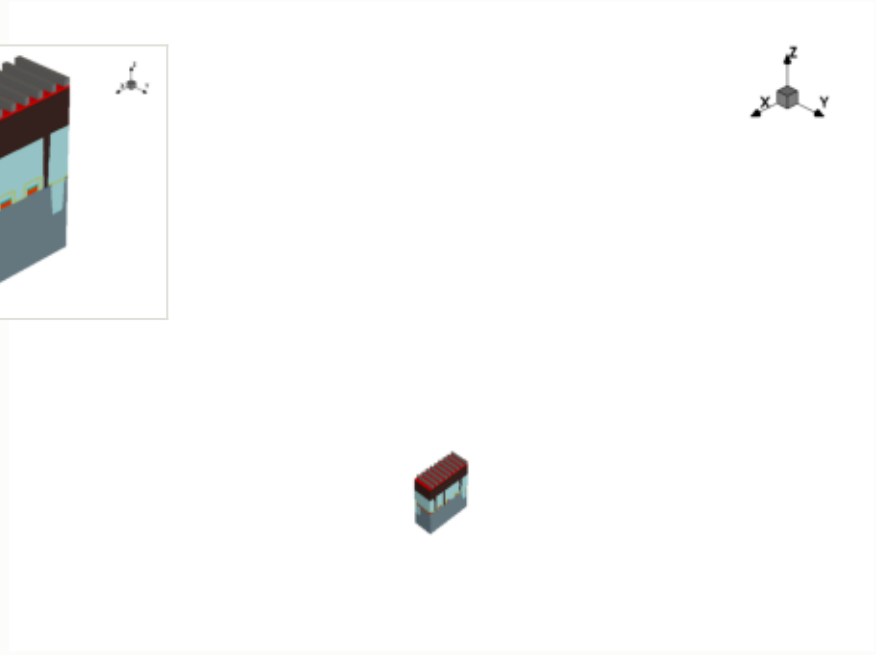


this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

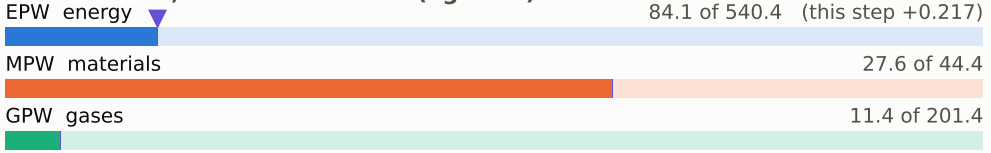


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

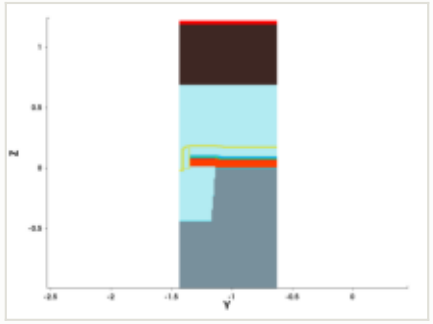


y cut at -1.035 µm

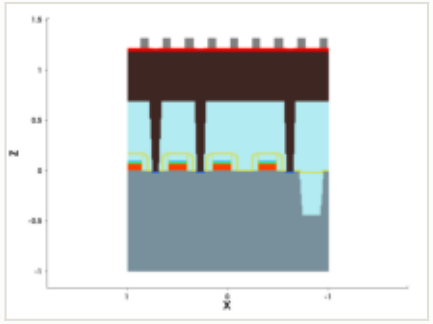


mask: layer 20:0 (OASIS)




steps by process area

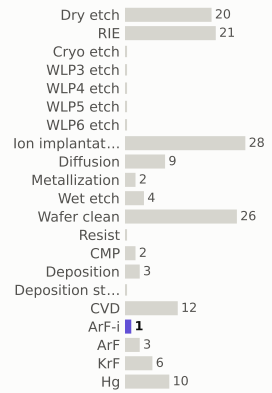

materials deposited (g)



gases emitted (g)

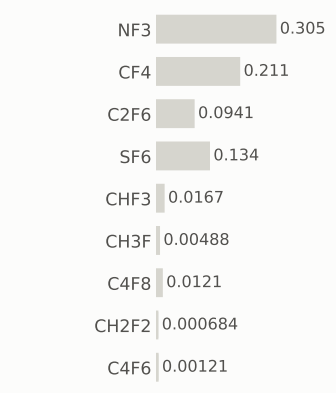


Step #1550: RIE


etch_anisotropic · RIE

1.04	124.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

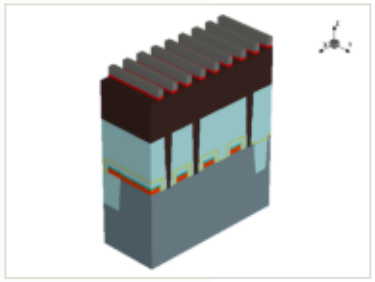

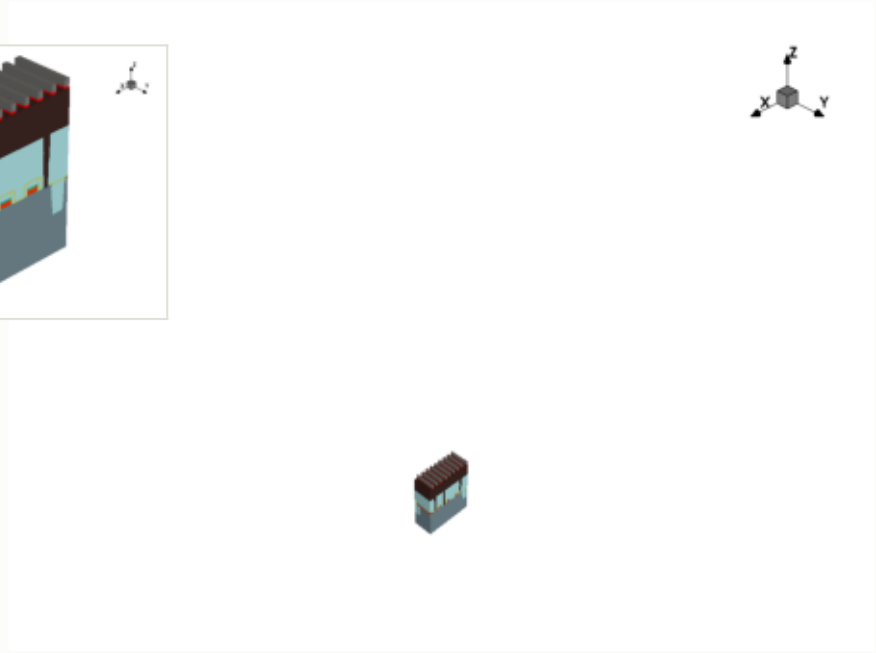


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

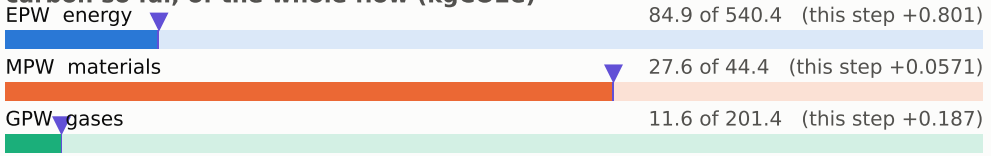


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

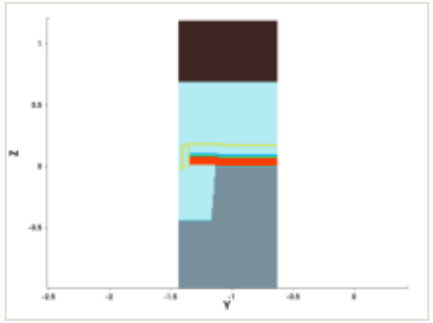


y cut at -1.035 µm

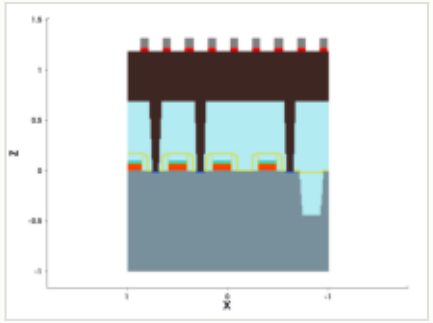


mask for this step

no mask for this step


steps by process area

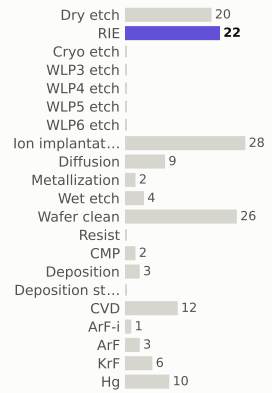

materials deposited (g)



gases emitted (g)

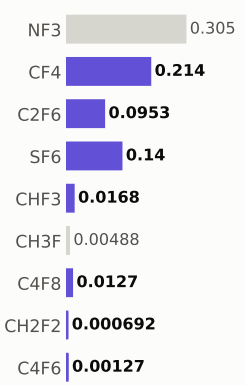


Step #1560: RIE


etch_anisotropic · RIE

1.04	125.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

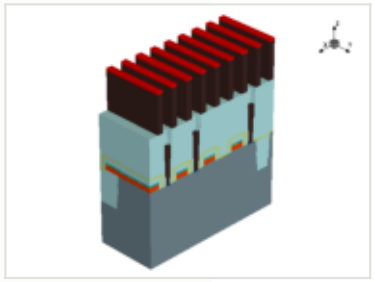

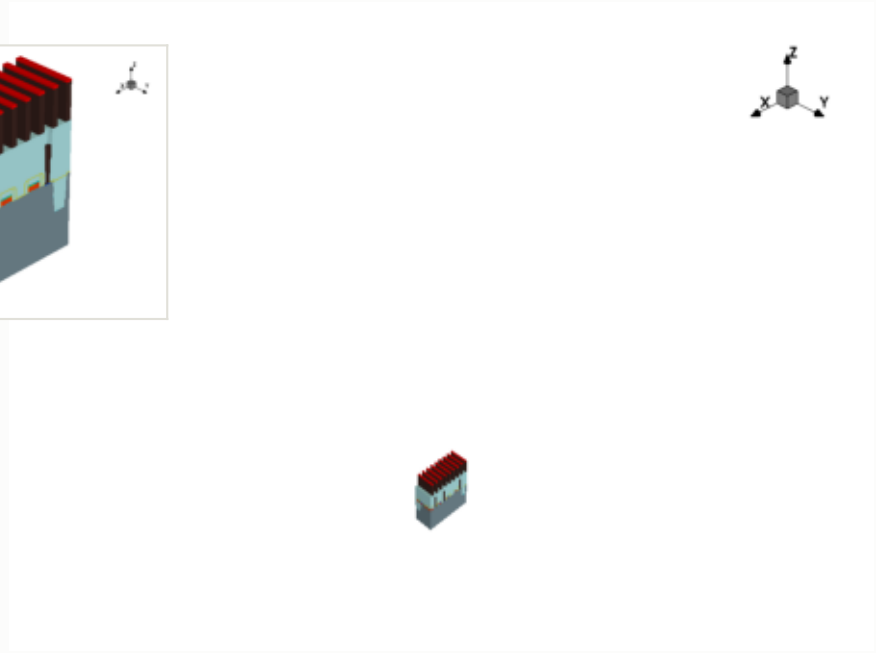


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

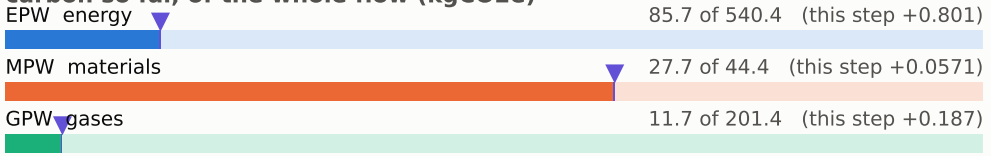


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

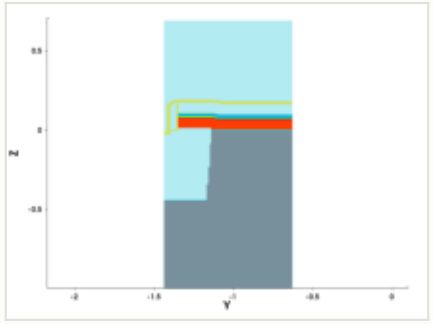


y cut at -1.035 µm

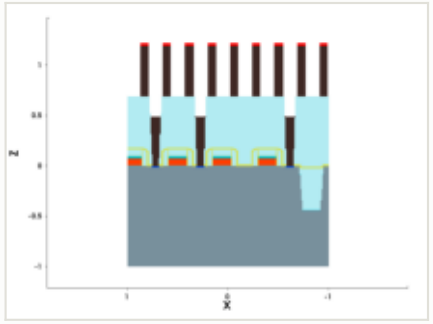


mask for this step

no mask for this step


steps by process area

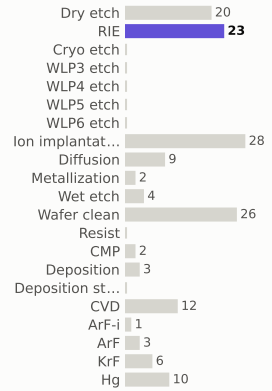

materials deposited (g)

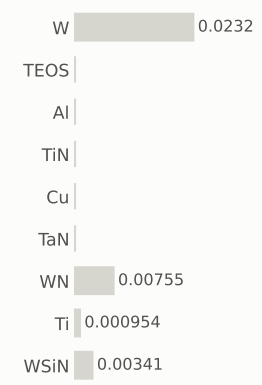

gases emitted (g)

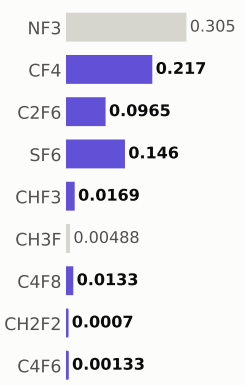


Step #1570: RIE

etch_anisotropic · RIE

1.04	126.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

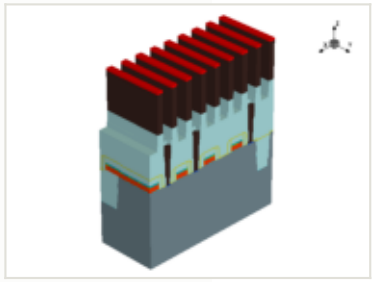






x cut at 0.000 µm

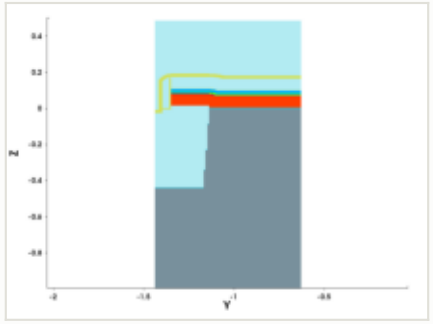

y cut at -1.035 µm

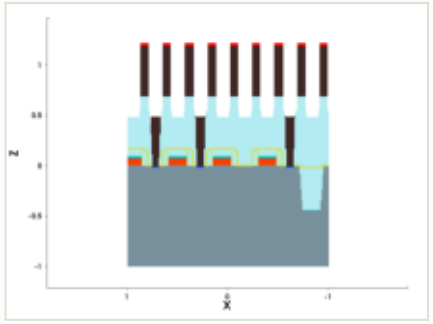

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

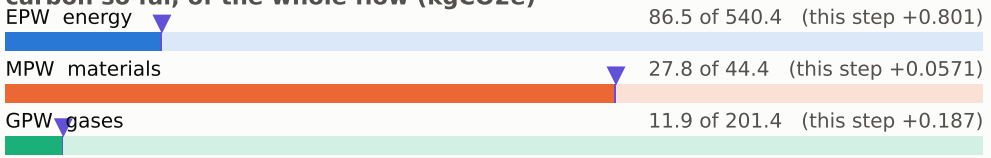


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

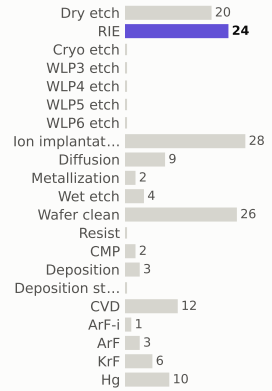

materials deposited (g)

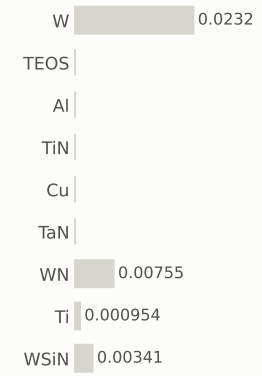

gases emitted (g)

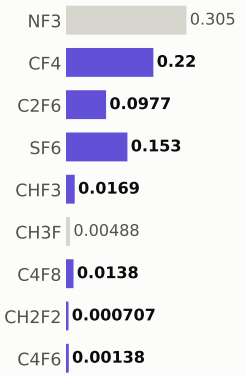


Step #1580: RIE

etch_isotropic · RIE

1.04	127.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

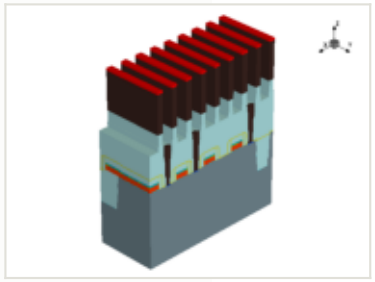






x cut at 0.000 µm

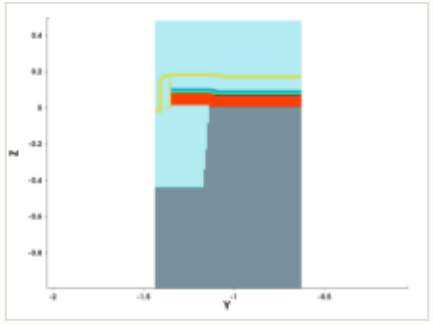

y cut at -1.035 µm

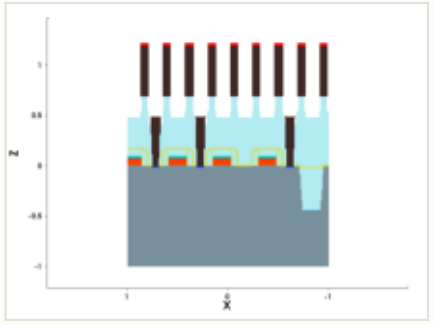

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

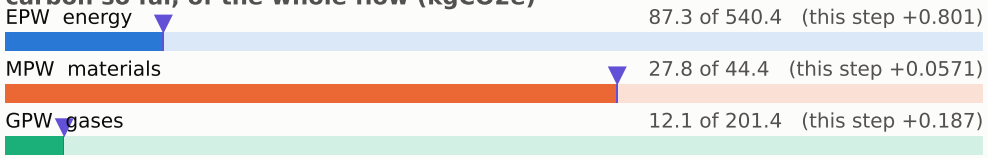


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

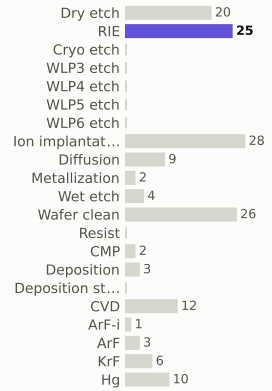

materials deposited (g)

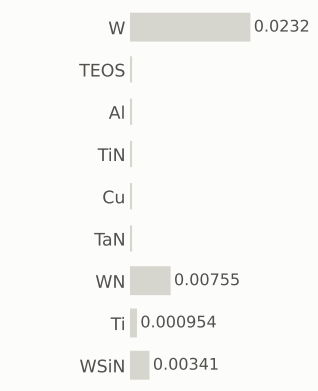

gases emitted (g)

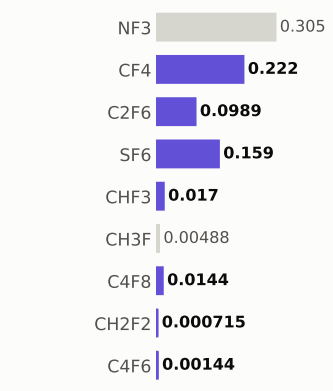


Step #1590: Dry_etch

etch_strip · Dry_etch

0.801	128.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

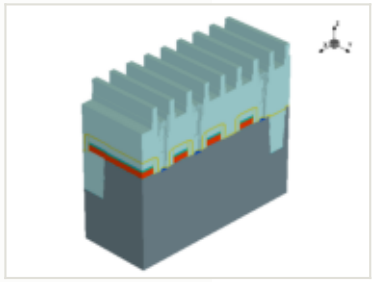






x cut at 0.000 µm

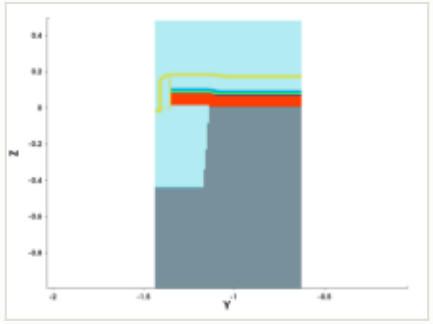

y cut at -1.035 µm

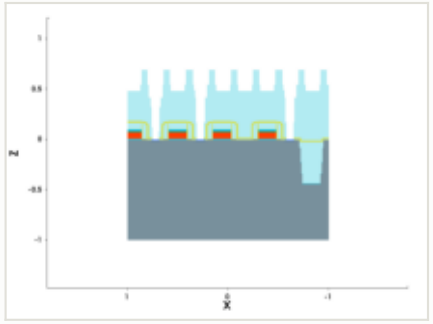


mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

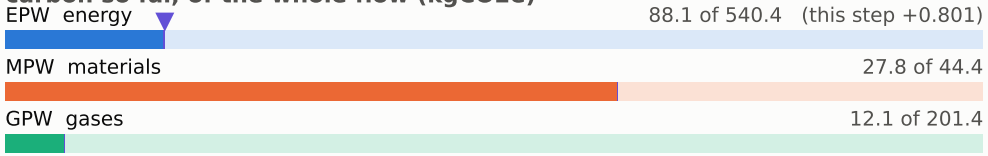


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

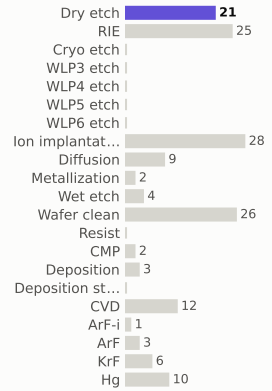

materials deposited (g)



gases emitted (g)

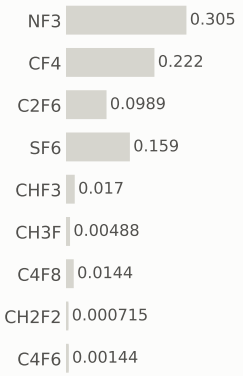


Step #1600: Wafer_clean

clean · Wafer_clean

0.169	128.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

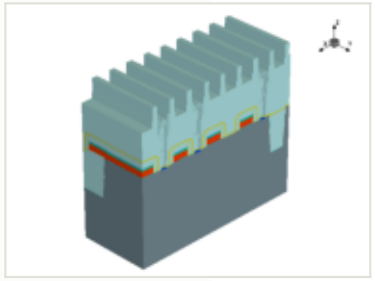






x cut at 0.000 µm

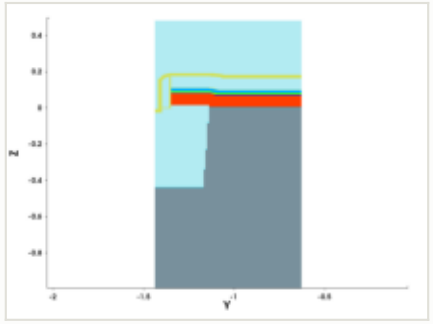

y cut at -1.035 µm

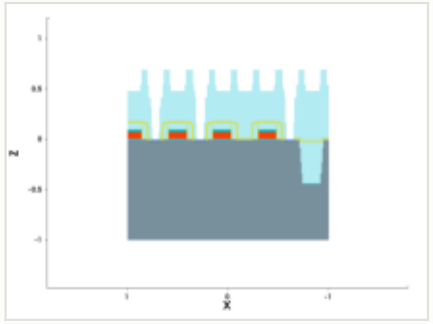

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

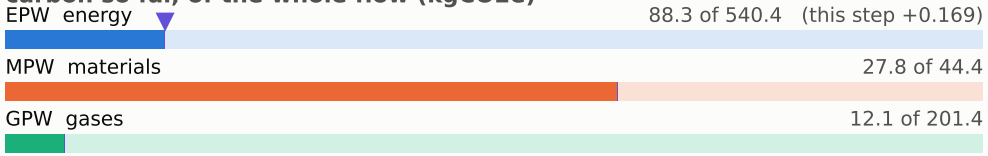


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

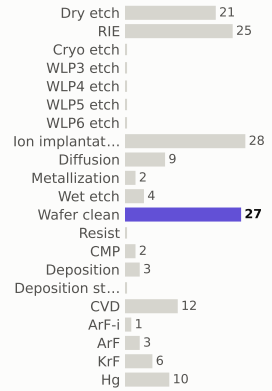

materials deposited (g)

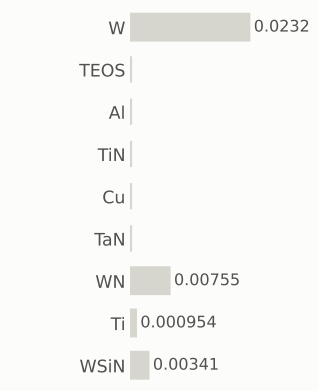

gases emitted (g)

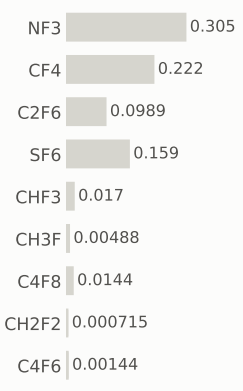


Step #1610: CVD

depo_isotropic · CVD

1.31	129.5	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

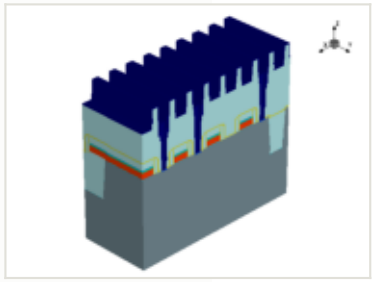






this step

process area	CVD
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0319 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

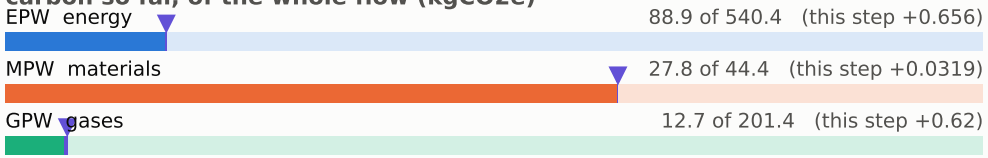


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

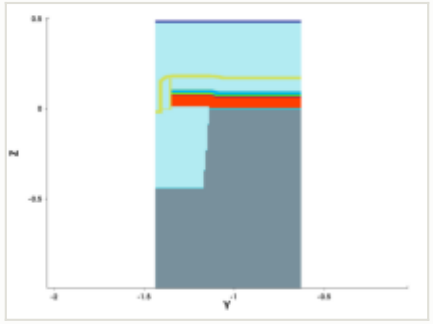


y cut at -1.035 µm

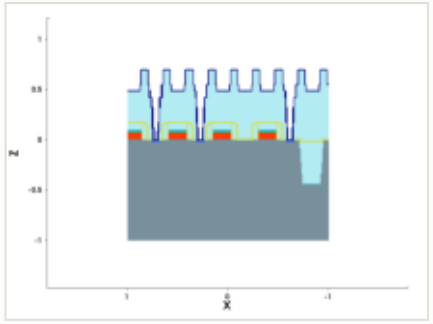


mask for this step

no mask for this step


steps by process area

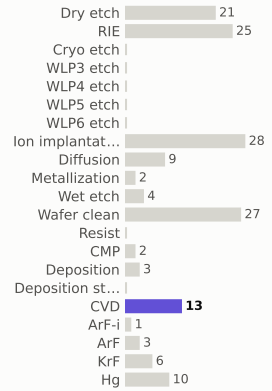

materials deposited (g)



gases emitted (g)

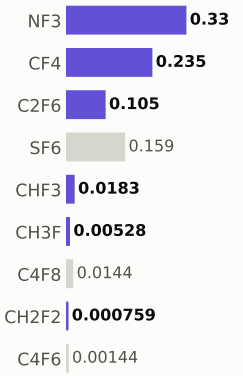


Step #1620: Metallization

depo_isotropic · Metallization

1.22	130.7	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

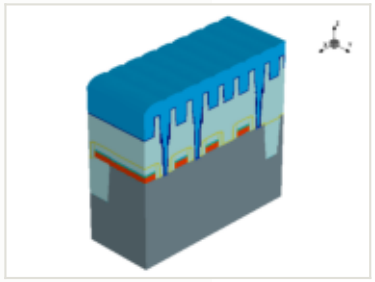






this step


process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

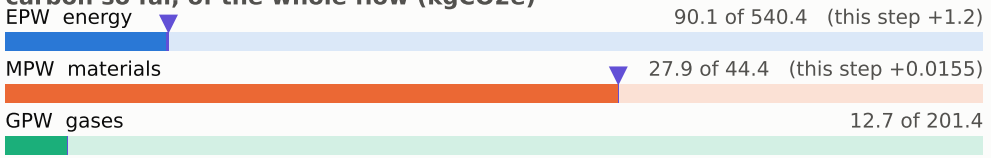


embodied carbon up to each step (kgCO2e per wafer)

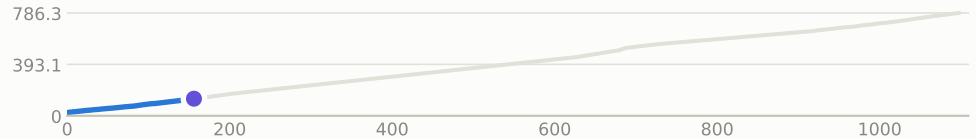

x cut at 0.000 µm

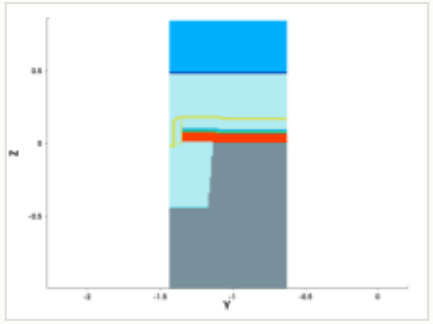


y cut at -1.035 µm

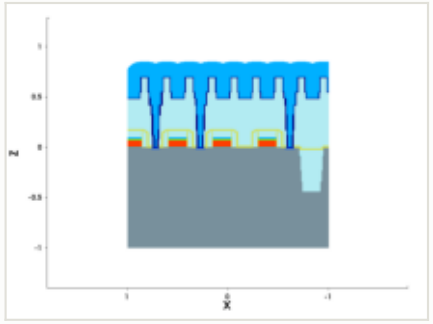


mask for this step

no mask for this step


steps by process area

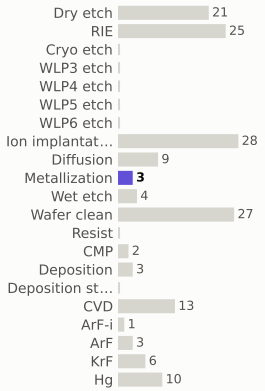

materials deposited (g)

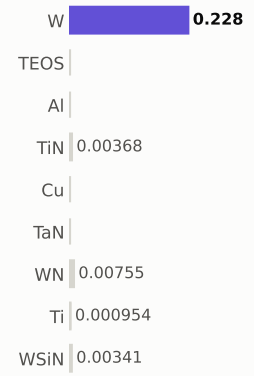

gases emitted (g)

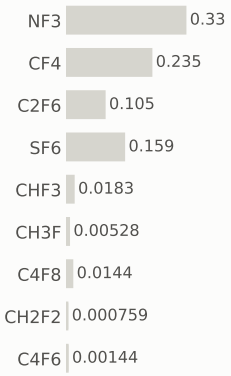


Step #1630: CMP

etch_cmp · CMP

0.169	130.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

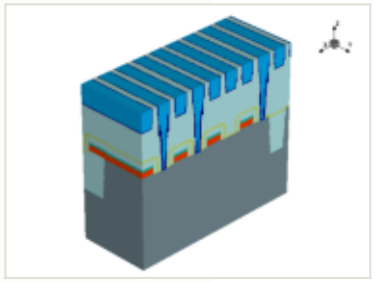






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

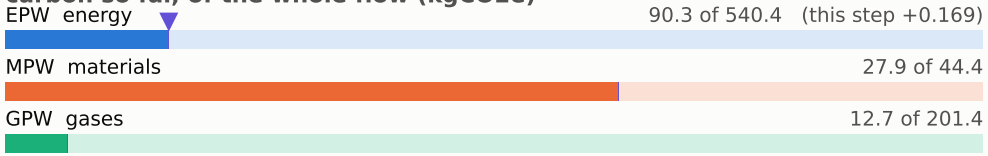


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

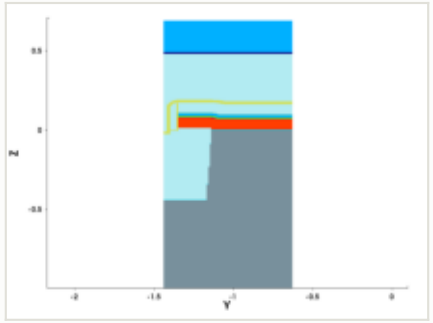


y cut at -1.035 µm

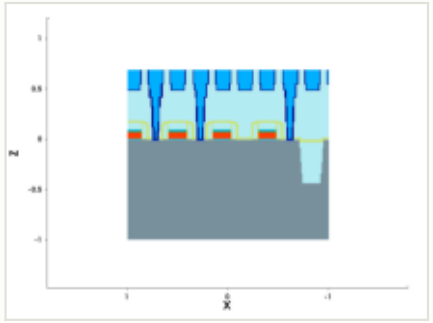


mask for this step

no mask for this step


steps by process area

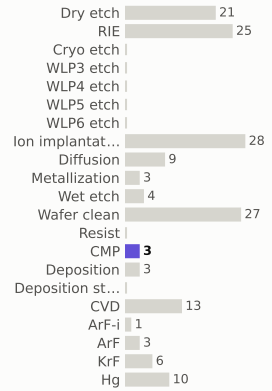

materials deposited (g)



gases emitted (g)

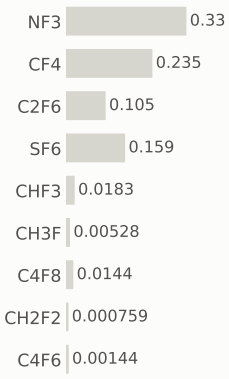


Step #1640: Wafer_clean

clean · Wafer_clean

0.169	131.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

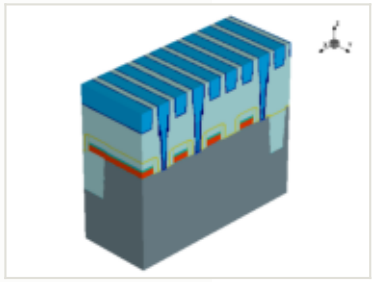






x cut at 0.000 µm

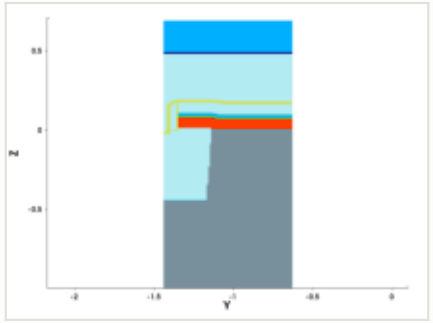

y cut at -1.035 µm

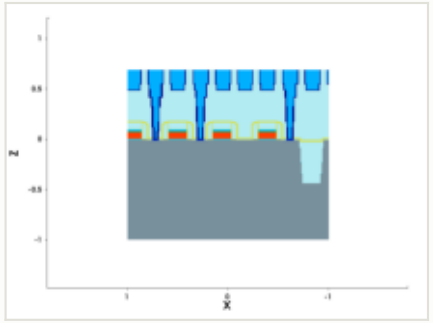

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

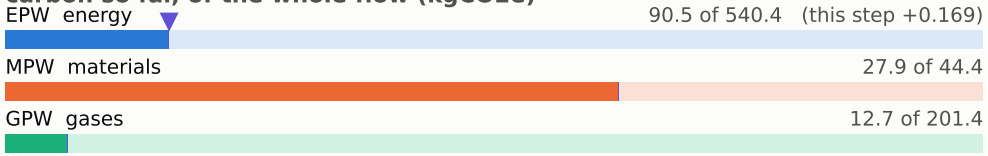

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

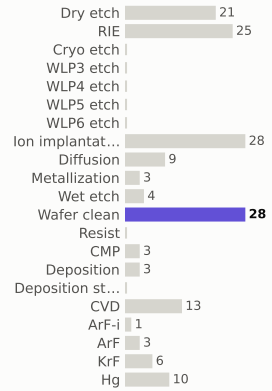

materials deposited (g)



gases emitted (g)

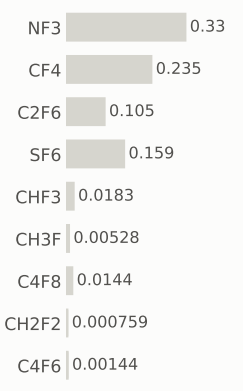


Step #1660: CVD

depo_isotropic · CVD

1.31	132.4	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

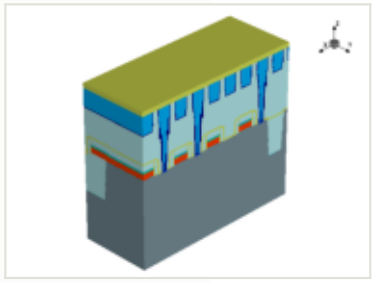






this step

process area	CVD
material	—
thickness	0.053 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

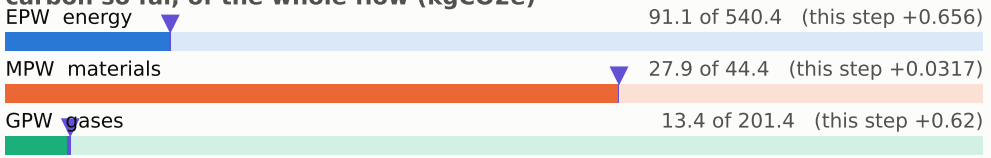


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

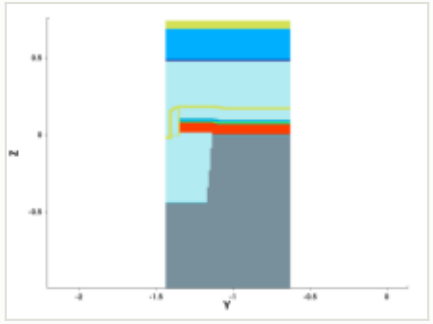


y cut at -1.035 µm

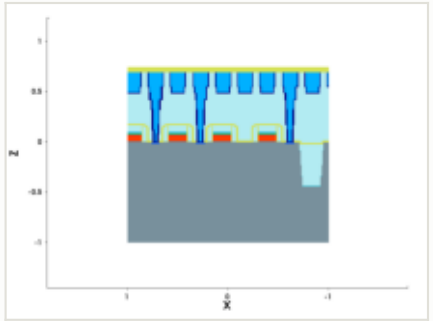


mask for this step

no mask for this step


steps by process area

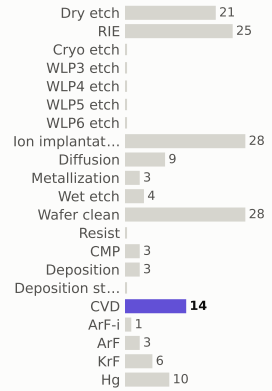

materials deposited (g)

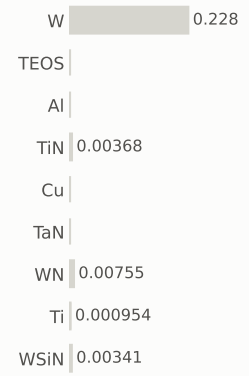

gases emitted (g)

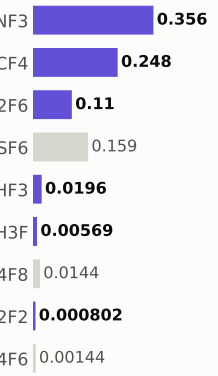


Step #1670: CVD

depo_isotropic · CVD

1.31	133.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

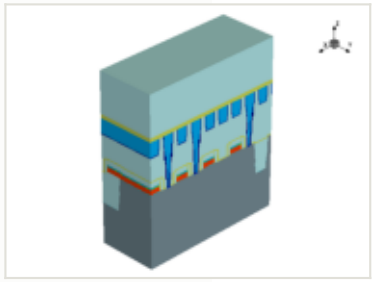






this step

process area	CVD
material	—
thickness	0.56 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

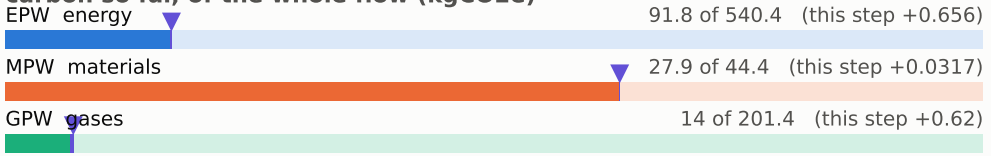


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

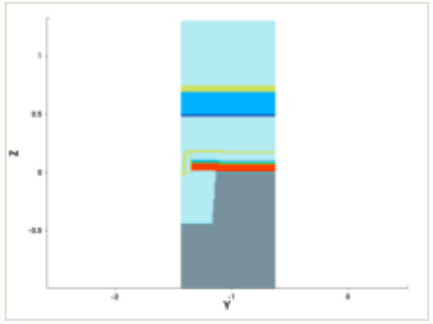


y cut at -1.035 µm

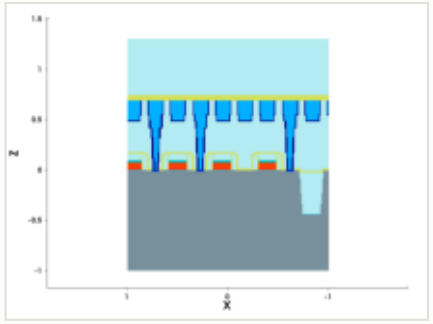


mask for this step

no mask for this step


steps by process area

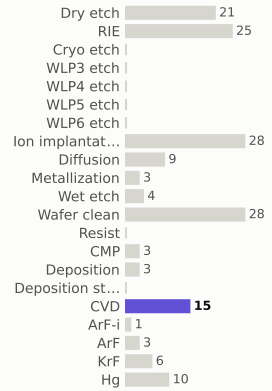

materials deposited (g)

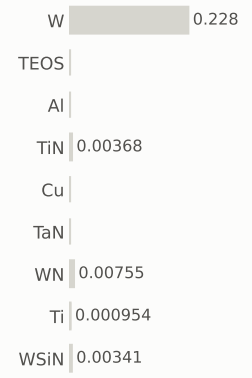

gases emitted (g)




Step #1680: ArF

litho_patterning · ArF


0.199	133.9	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

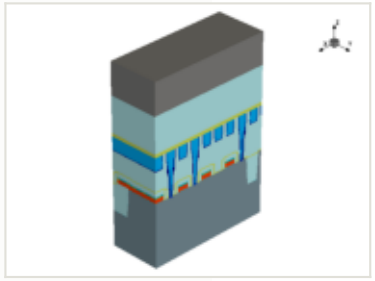






this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

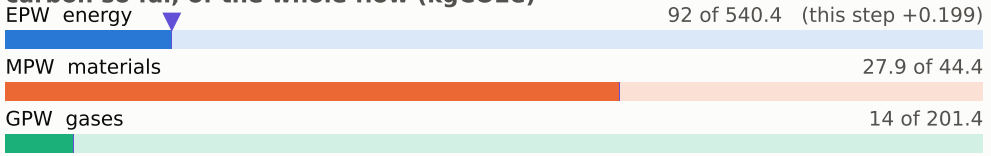


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

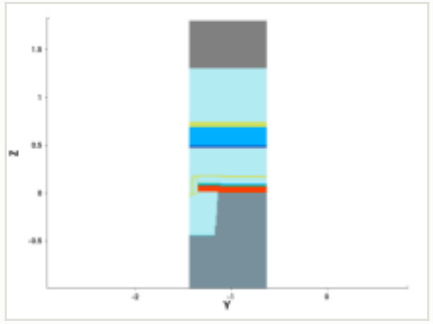


y cut at -1.035 µm

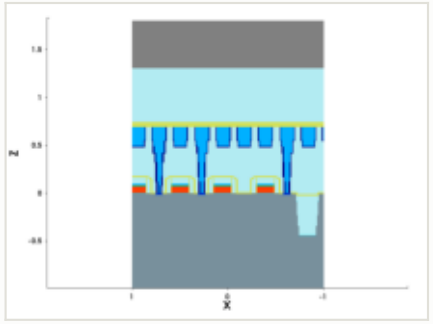

mask: layer 21:0, positive (OASIS)




steps by process area

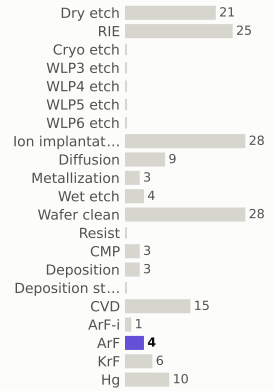

materials deposited (g)



gases emitted (g)

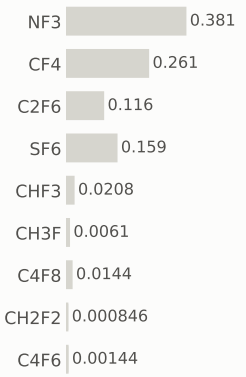


Step #1690: RIE

etch_anisotropic · RIE


1.04	134.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

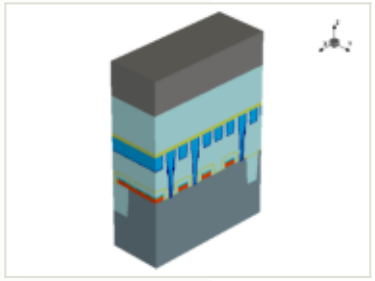






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

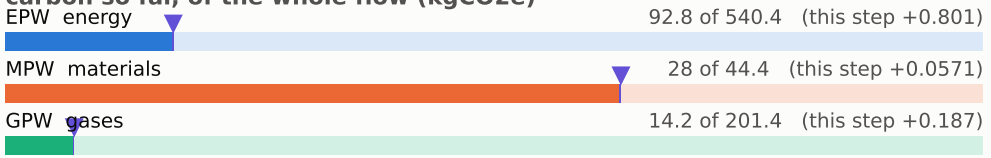


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

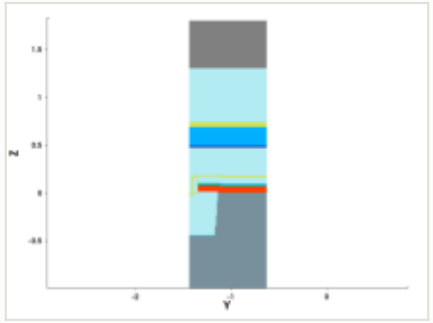


y cut at -1.035 µm

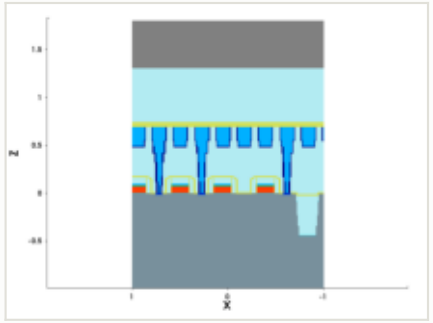


mask for this step

no mask for this step


steps by process area

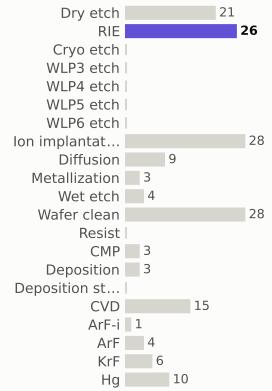

materials deposited (g)



gases emitted (g)

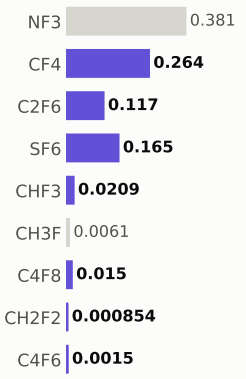


Step #1700: Dry_etch

etch_strip · Dry_etch

0.801	135.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

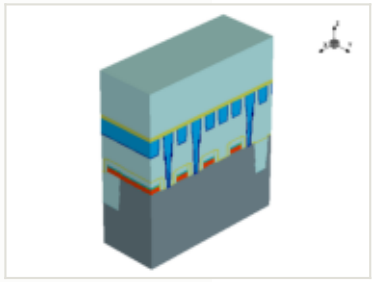






x cut at 0.000 µm

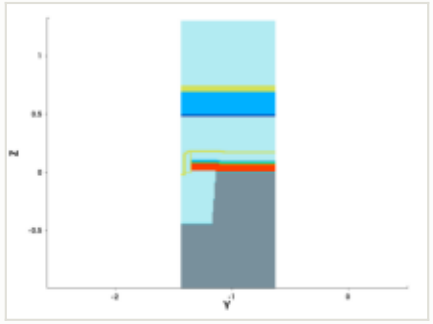

y cut at -1.035 µm

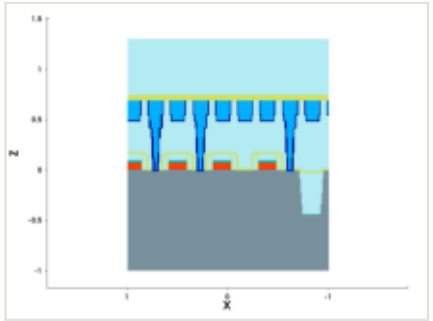


mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

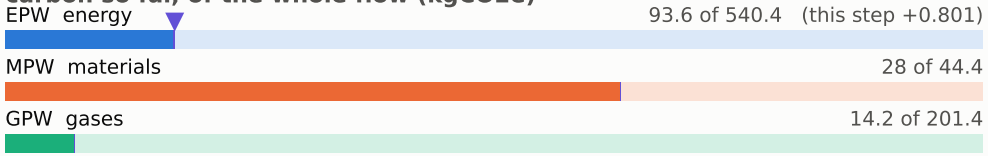


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

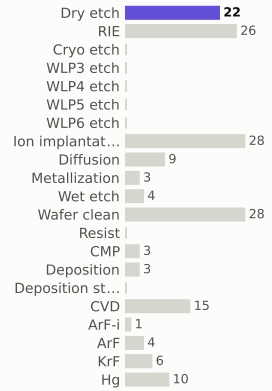

materials deposited (g)

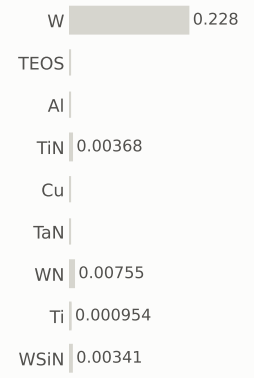

gases emitted (g)

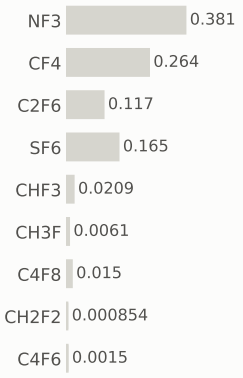


Step #1710: Wafer_clean


clean · Wafer_clean

0.169	135.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

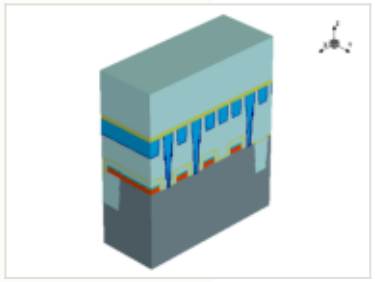


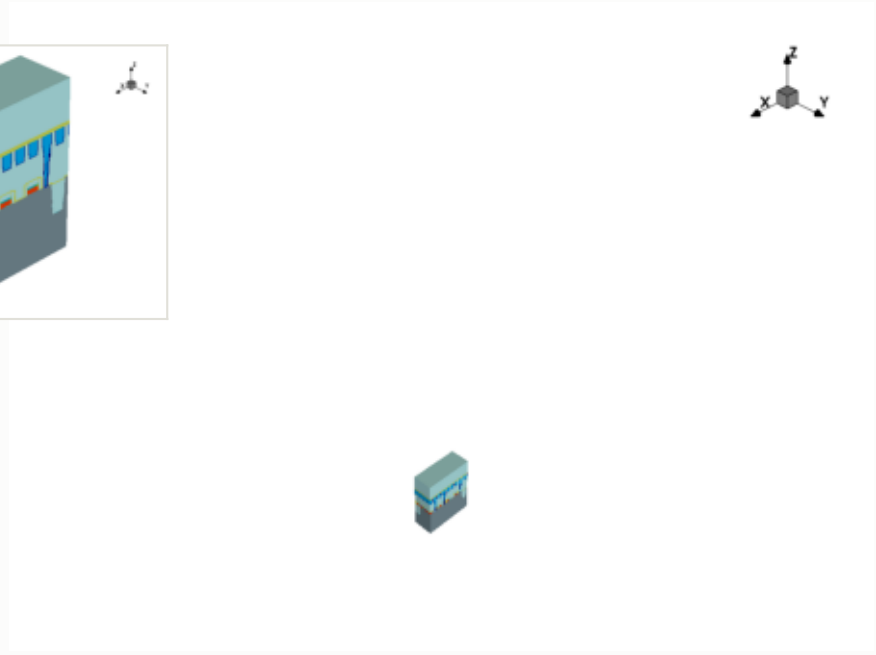

x cut at 0.000 µm

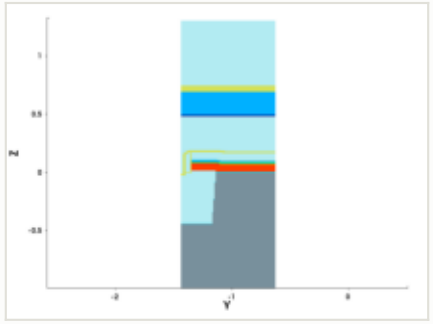

y cut at -1.035 µm

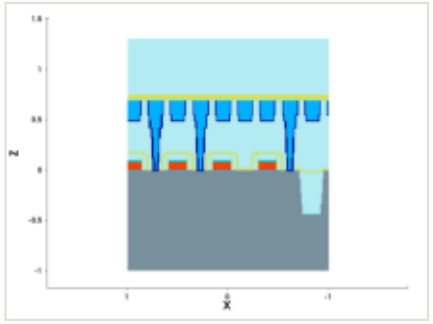

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

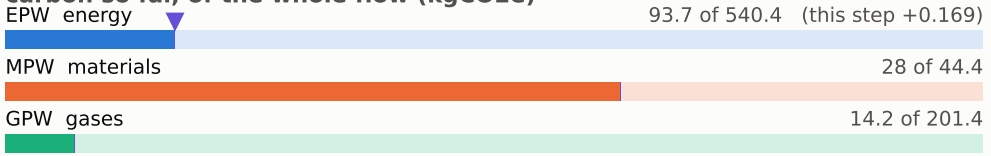

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

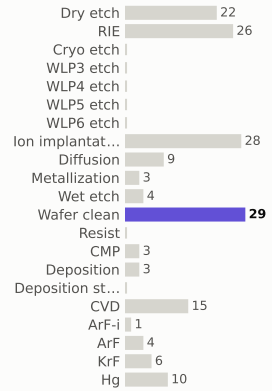

materials deposited (g)



gases emitted (g)

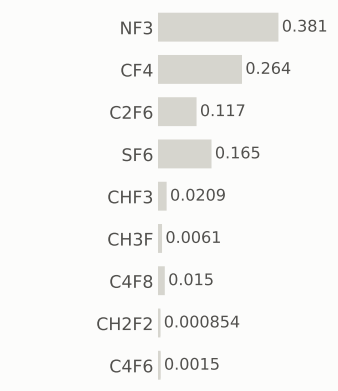


Step #1720: KrF

litho_patterning · KrF


0.199	136.1	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

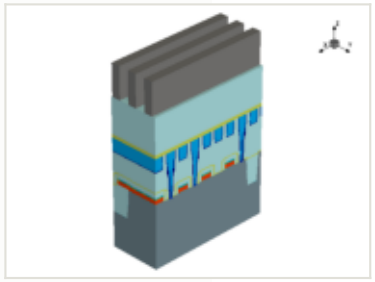






this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

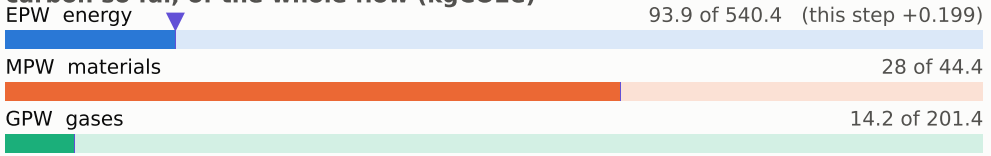


embodied carbon up to each step (kgCO2e per wafer)




x cut at 0.000 µm

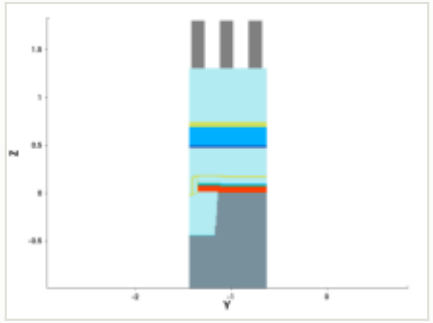


y cut at -1.035 µm

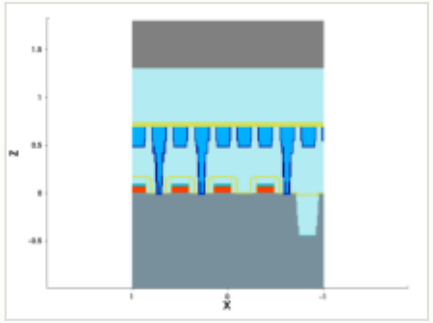

mask: layer 22:0 (OASIS)




steps by process area

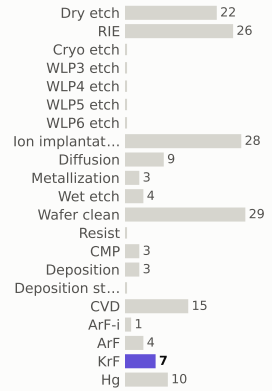

materials deposited (g)



gases emitted (g)

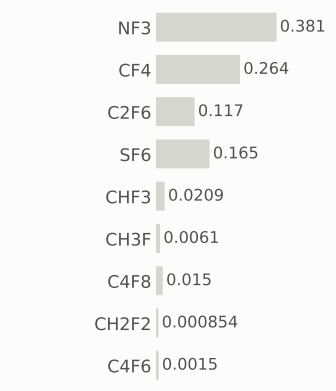


Step #1730: RIE

etch_anisotropic · RIE


1.04	137.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

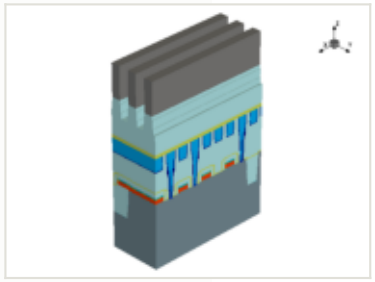






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

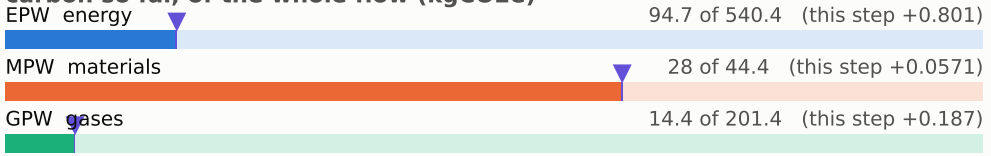


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

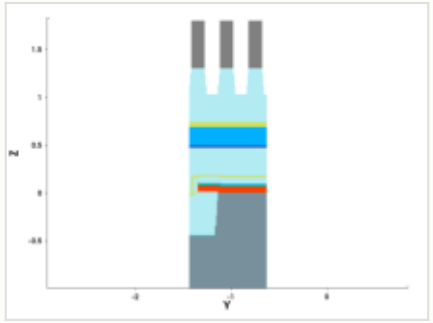


y cut at -1.035 µm

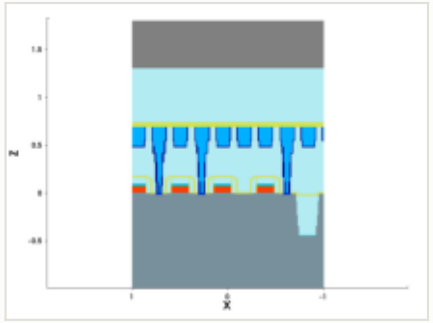


mask for this step

no mask for this step


steps by process area

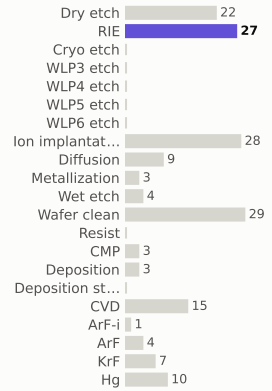

materials deposited (g)

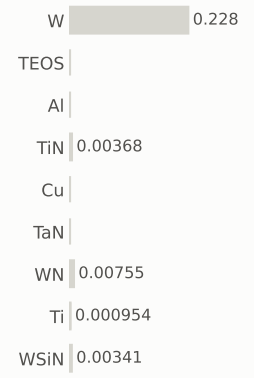

gases emitted (g)

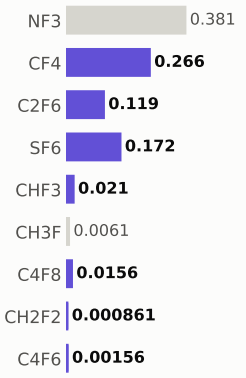


Step #1740: RIE

etch_anisotropic · RIE


1.04	138.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

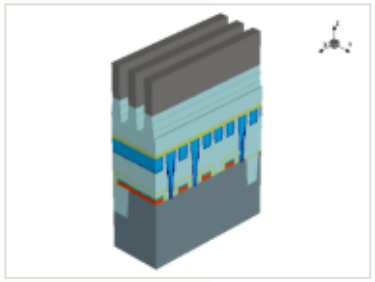






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

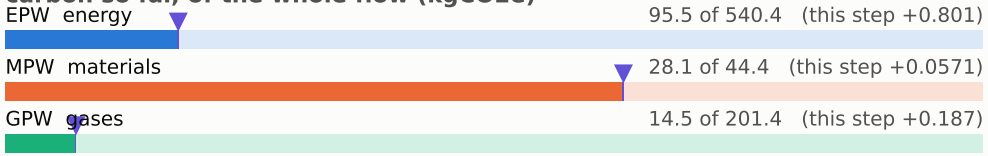


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

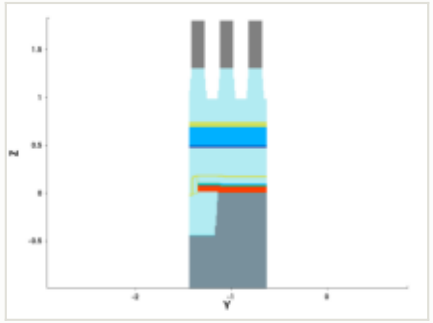


y cut at -1.035 µm

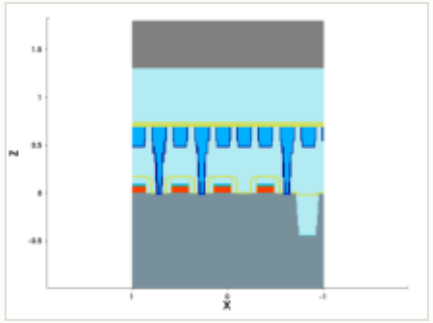


mask for this step

no mask for this step


steps by process area

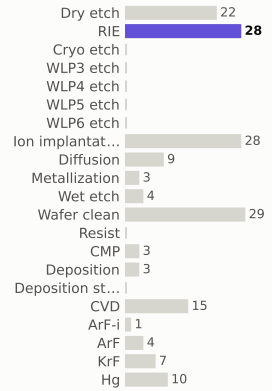

materials deposited (g)

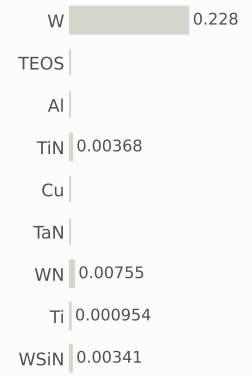

gases emitted (g)

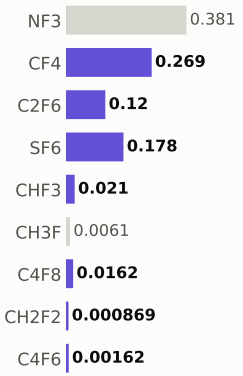


Step #1750: Dry_etch

etch_strip · Dry_etch

0.801	139.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

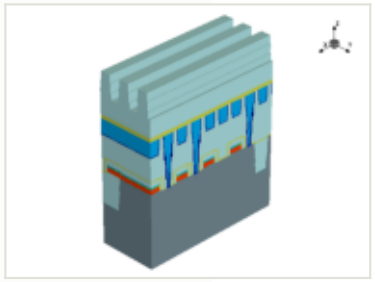






x cut at 0.000 µm

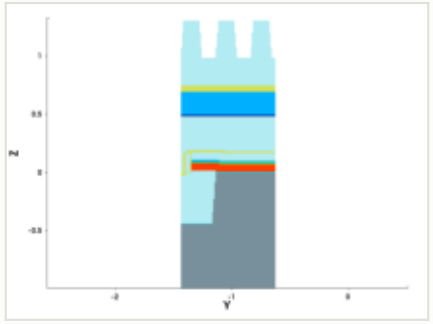

y cut at -1.035 µm

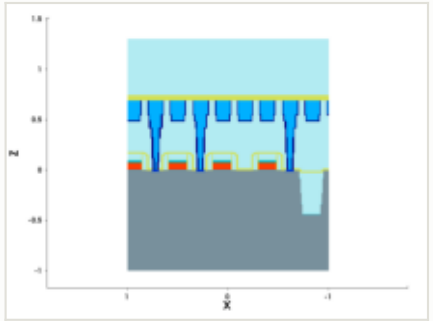


mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

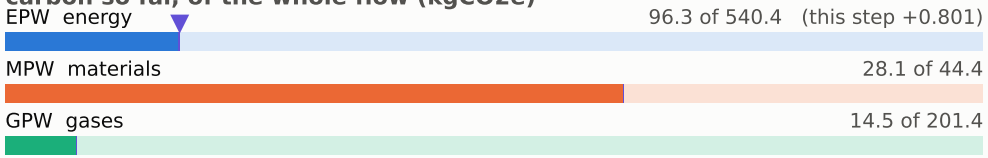

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

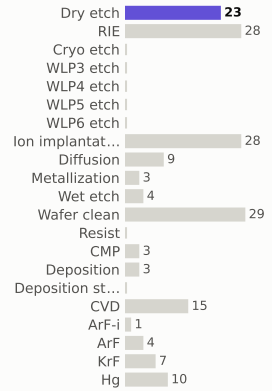

materials deposited (g)



gases emitted (g)

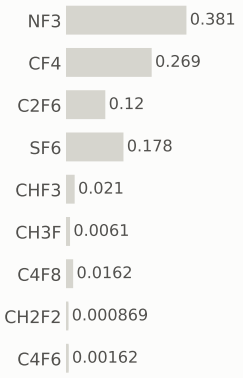


Step #1760: Wafer_clean


clean · Wafer_clean

0.169	139.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

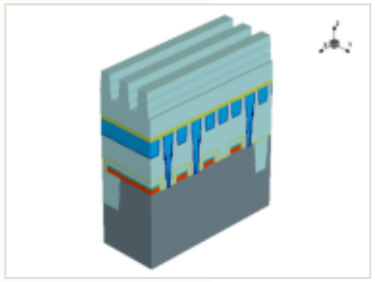

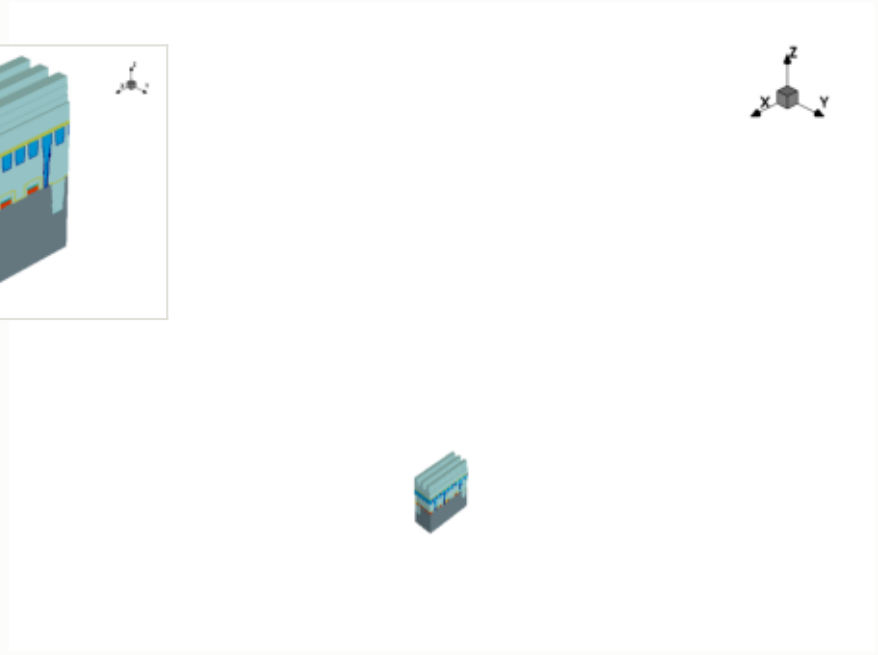


this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

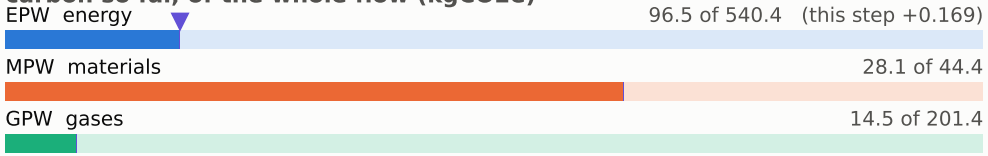


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

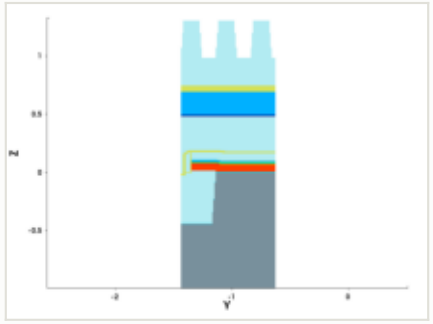


y cut at -1.035 µm

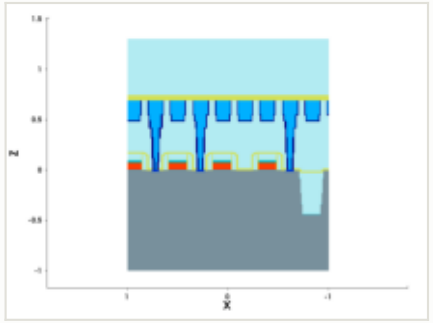


mask for this step

no mask for this step


steps by process area

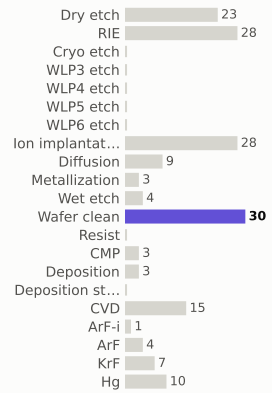

materials deposited (g)

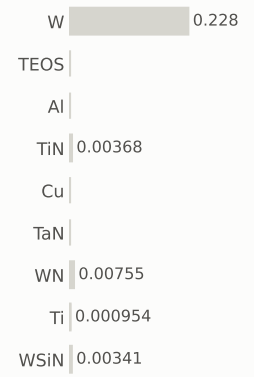

gases emitted (g)

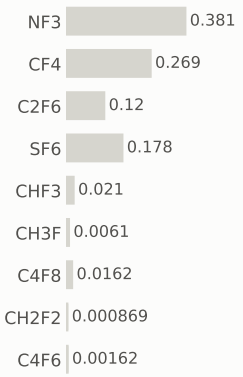


Step #1770: CVD


depo_isotropic · CVD

1.31	140.5	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

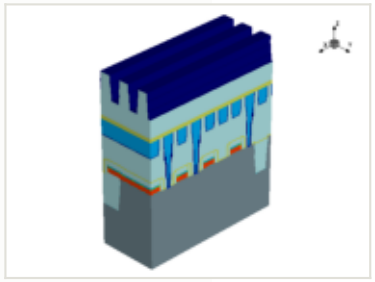

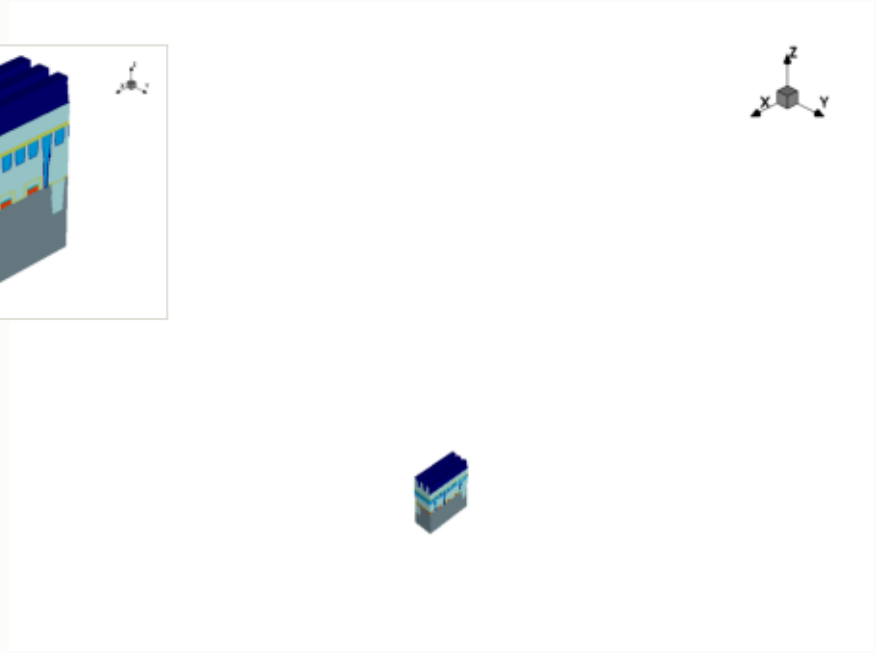


this step

process area	CVD
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0319 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

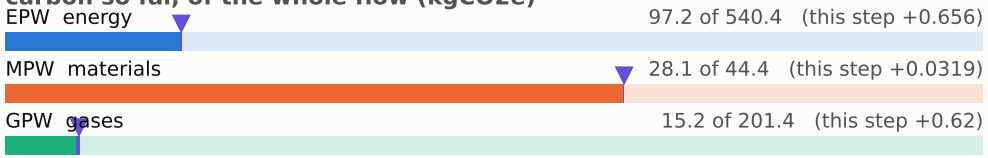


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

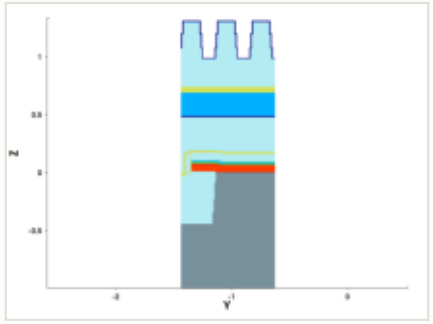


y cut at -1.035 µm

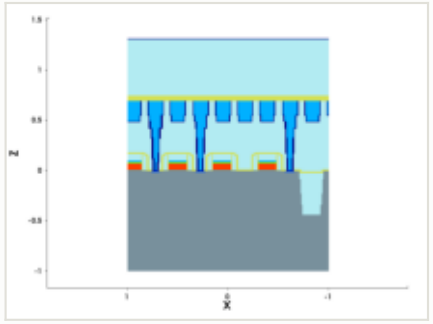


mask for this step

no mask for this step


steps by process area

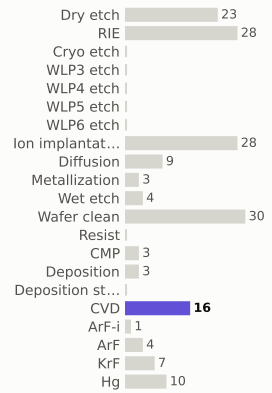

materials deposited (g)

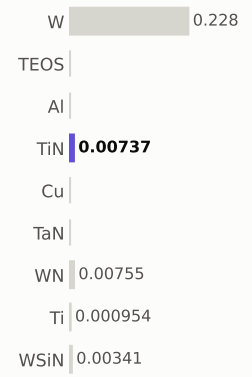

gases emitted (g)




Step #1780: Metallization

depo_isotropic · Metallization

1.24	141.7	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

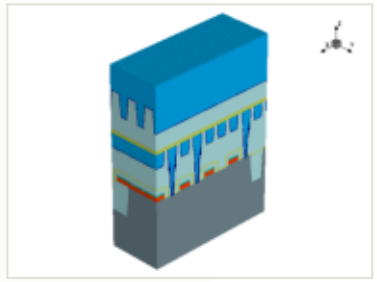






x cut at 0.000 µm

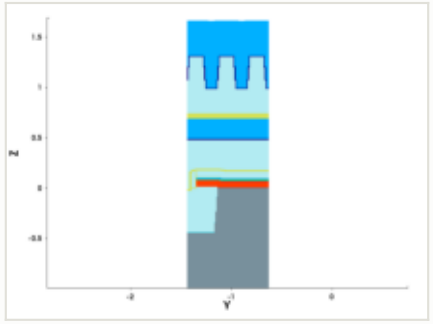

y cut at -1.035 µm

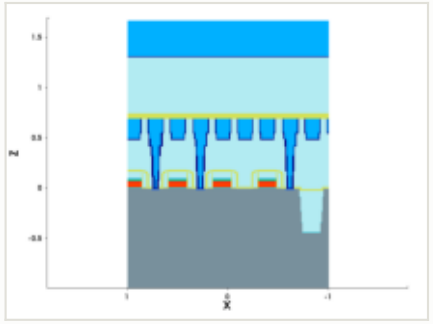

mask for this step


no mask for this step

this step

process area	Metallization
material	W
thickness	0.35 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0362 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.24 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

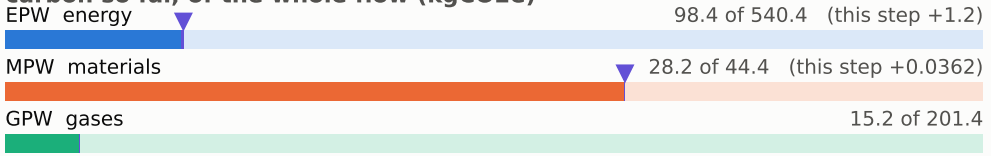


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

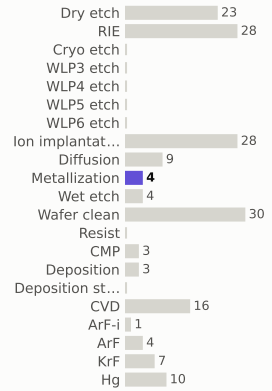

materials deposited (g)

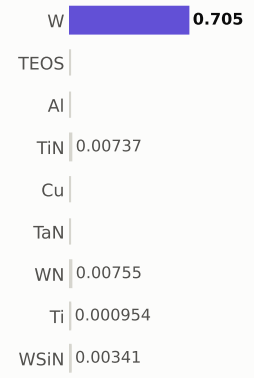

gases emitted (g)

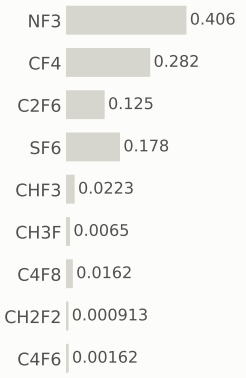


Step #1790: CMP


etch_cmp · CMP

0.169	141.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

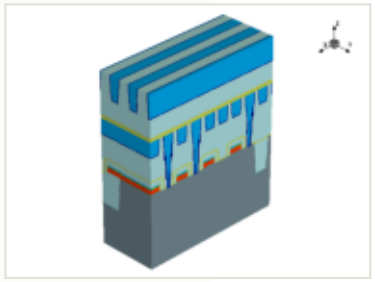

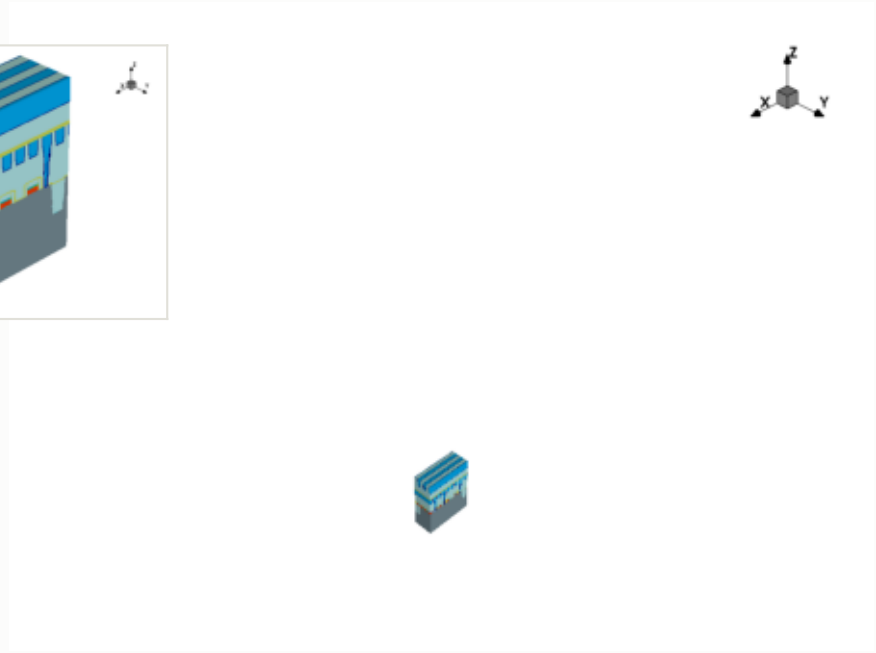


this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

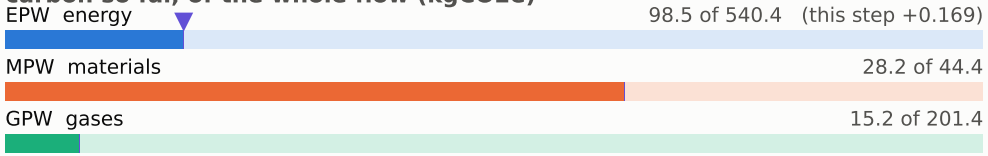


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

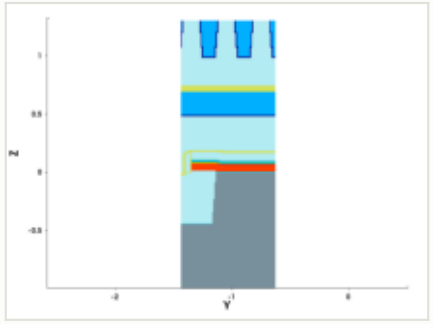


y cut at -1.035 µm

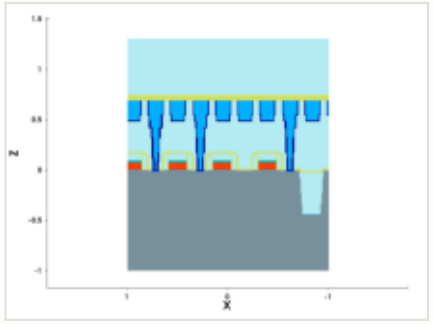


mask for this step

no mask for this step


steps by process area

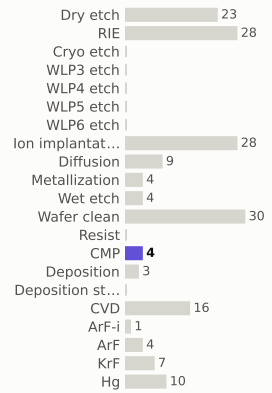

materials deposited (g)

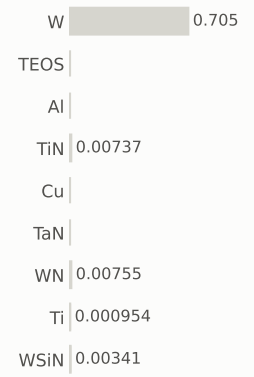

gases emitted (g)

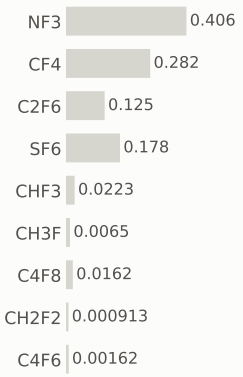


Step #1800: Wafer_clean


clean · Wafer_clean

0.169	142.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

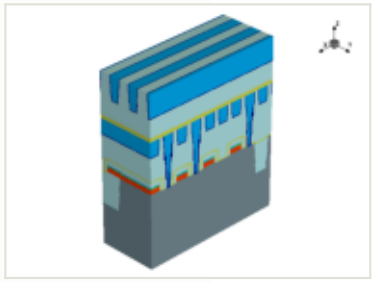

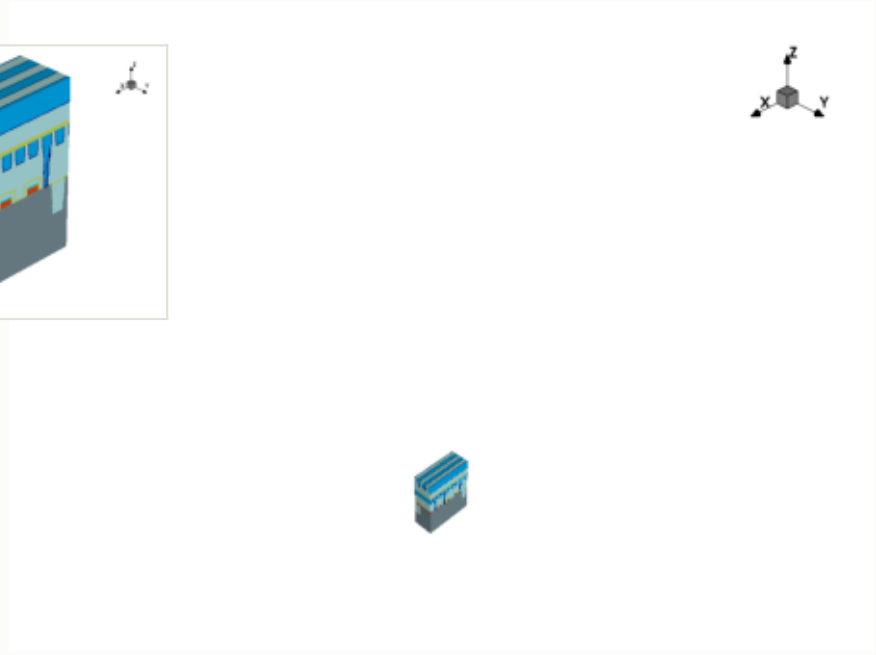


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

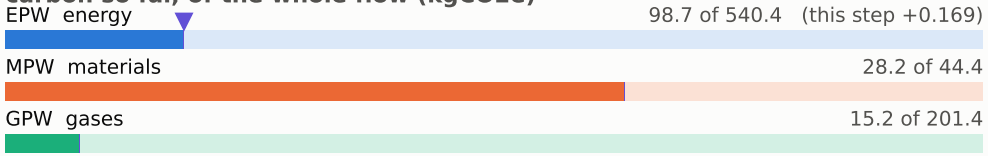


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

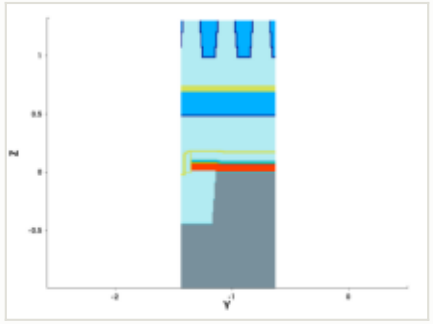


y cut at -1.035 µm

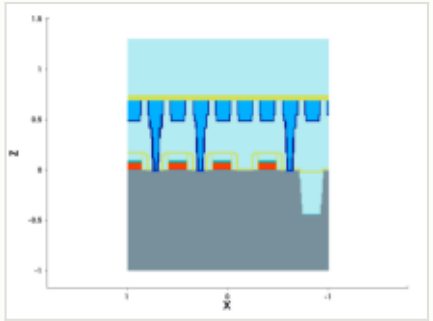


mask for this step

no mask for this step


steps by process area

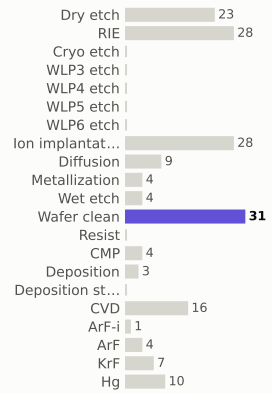

materials deposited (g)

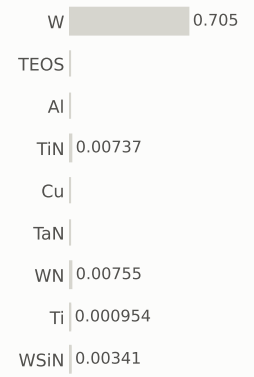

gases emitted (g)




Step #1820: CVD

depo_isotropic · CVD

1.31	143.3	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

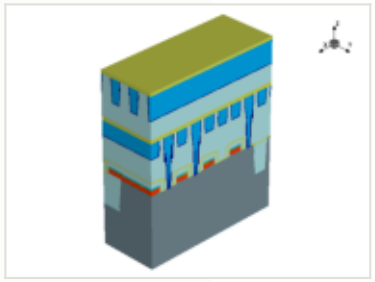






this step

process area	CVD
material	—
thickness	0.045 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

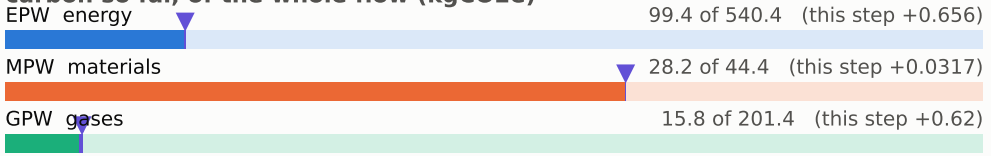


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

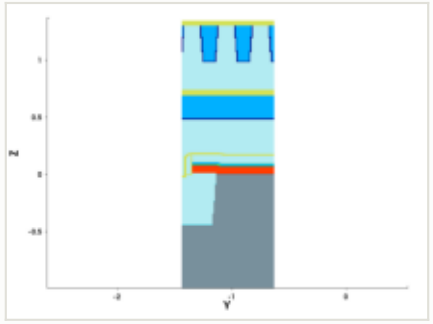


y cut at -1.035 µm

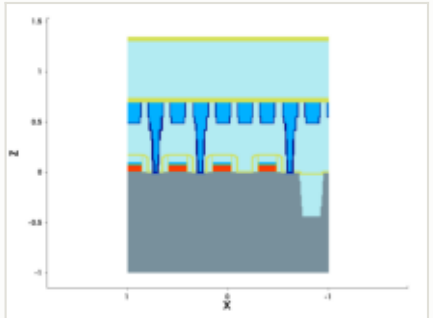


mask for this step

no mask for this step


steps by process area

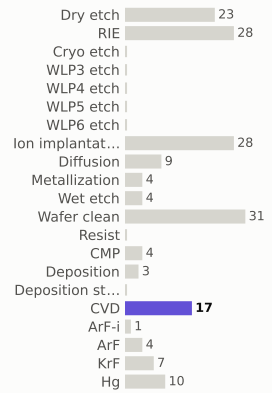

materials deposited (g)

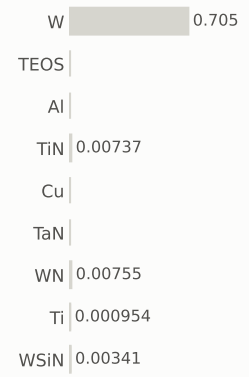

gases emitted (g)




Step #1830: CVD

depo_isotropic · CVD


1.31	144.6	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

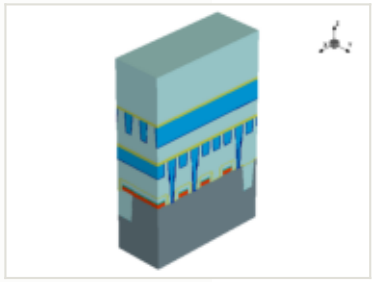






x cut at 0.000 µm

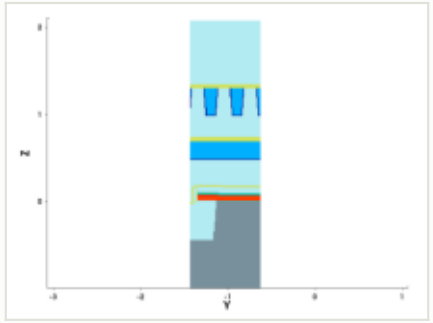

y cut at -1.035 µm

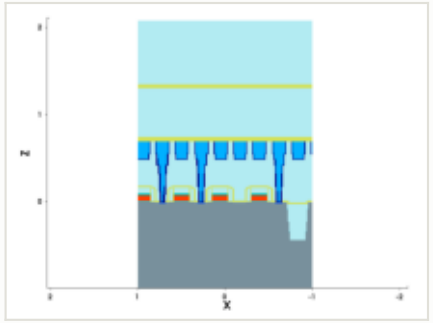

mask for this step


no mask for this step

this step

process area	CVD
material	—
thickness	0.73 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

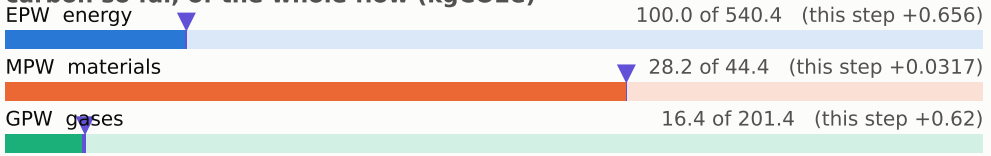


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

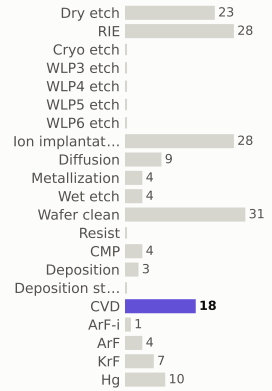

materials deposited (g)

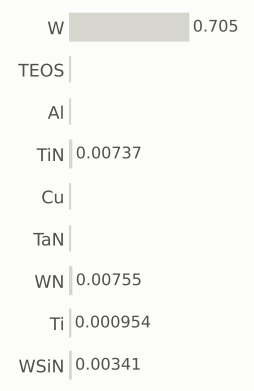

gases emitted (g)

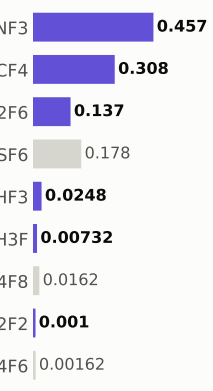


Step #1840: ArF

litho_patterning · ArF


0.199	144.8	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

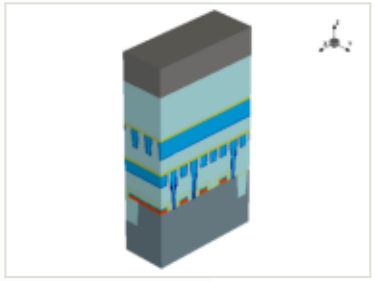






this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

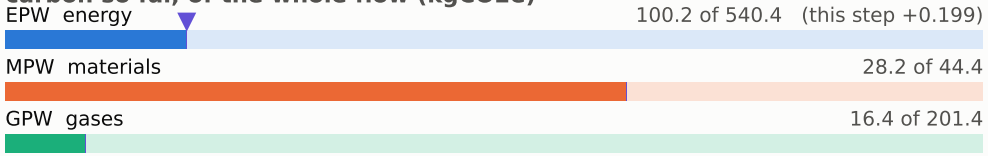


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

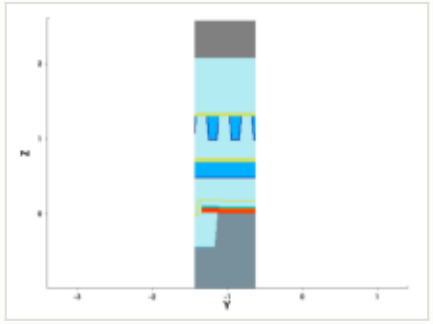


y cut at -1.035 µm

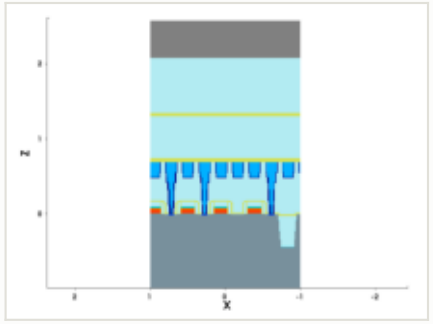


mask: layer 23:0, positive (OASIS)




steps by process area

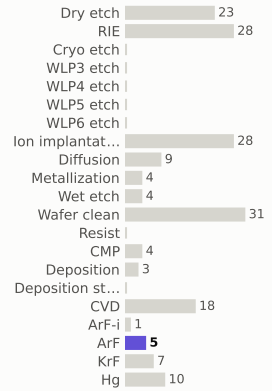

materials deposited (g)

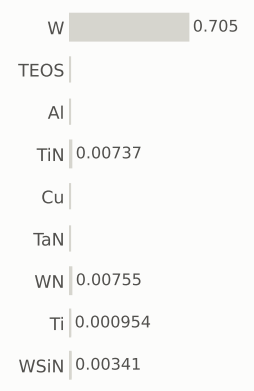

gases emitted (g)

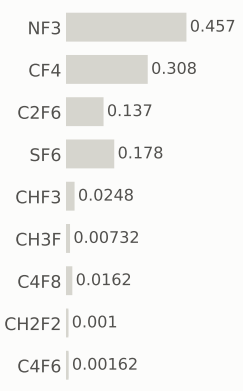


Step #1850: RIE

etch_anisotropic · RIE


1.04	145.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

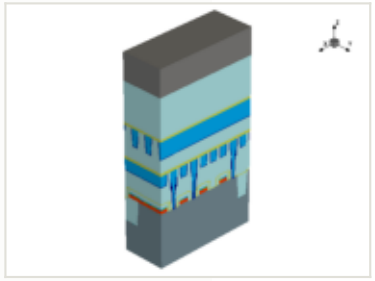






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

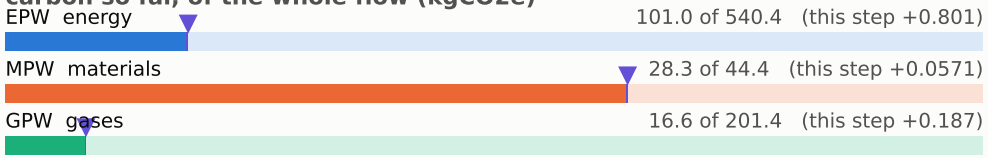


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

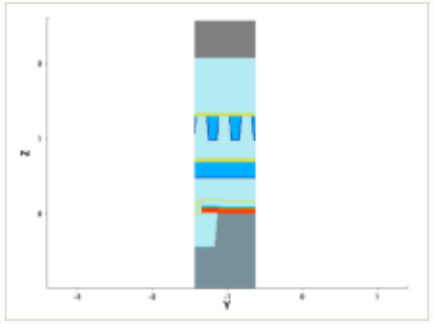


y cut at -1.035 µm

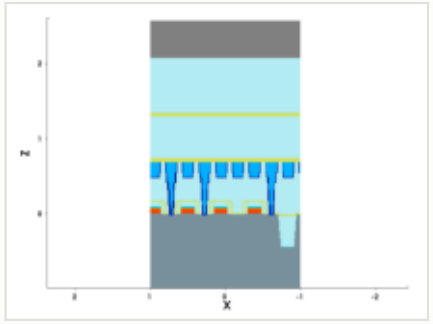

mask for this step

no mask for this step


steps by process area

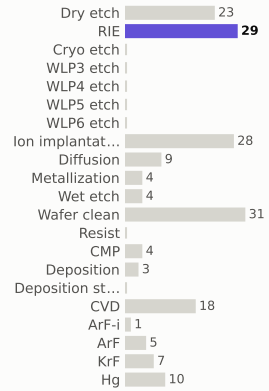

materials deposited (g)



gases emitted (g)

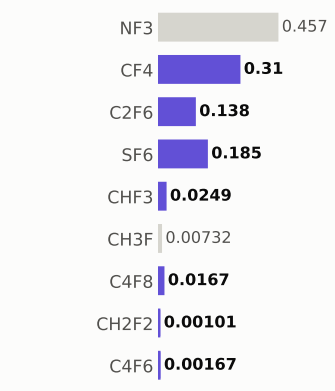


Step #1860: Dry_etch

etch_strip · Dry_etch


0.801	146.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

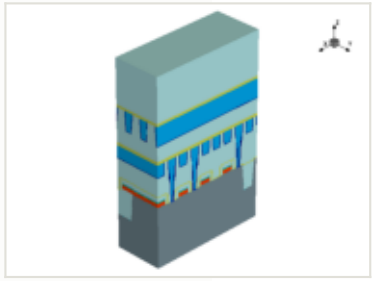






x cut at 0.000 µm

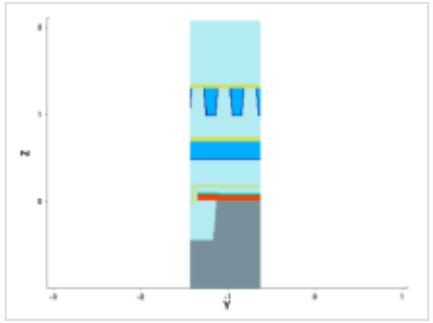

y cut at -1.035 µm

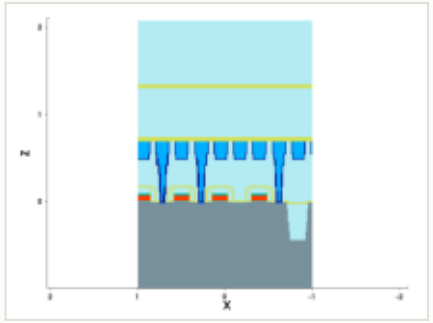


mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

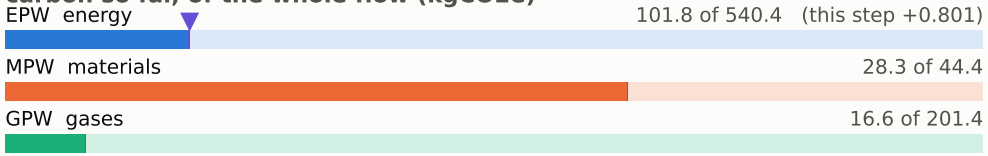


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

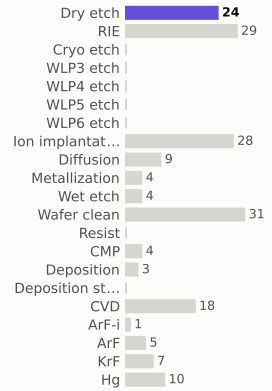

materials deposited (g)

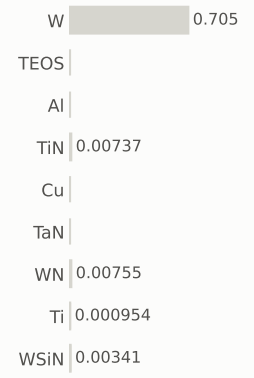

gases emitted (g)

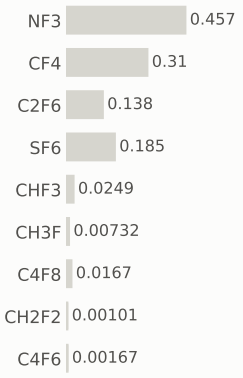


Step #1870: Wafer_clean

clean · Wafer_clean


0.169	146.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

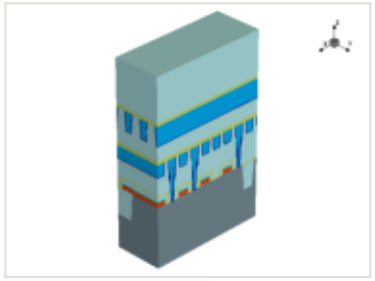






x cut at 0.000 µm

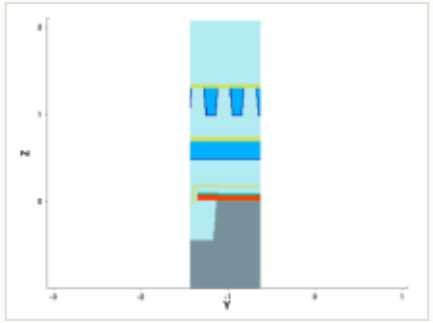

y cut at -1.035 µm

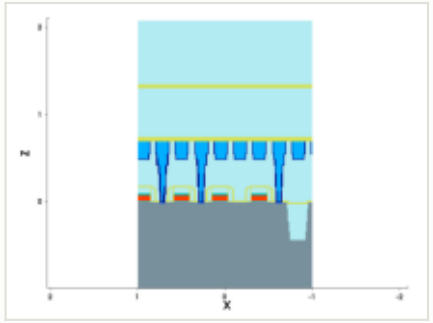

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

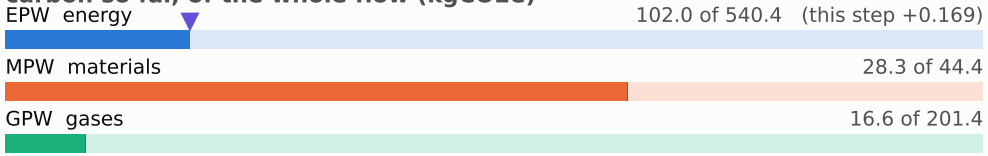

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

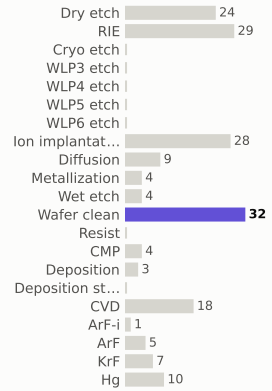

materials deposited (g)



gases emitted (g)

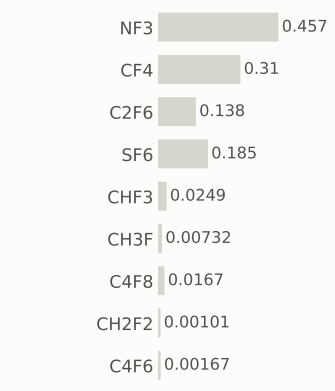


Step #1880: KrF

litho_patterning · KrF


0.199	147.1	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

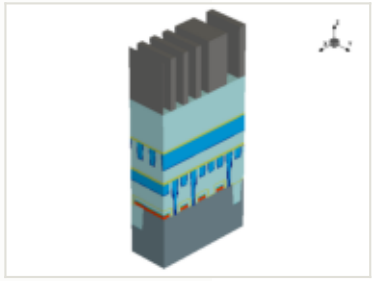






x cut at 0.000 µm

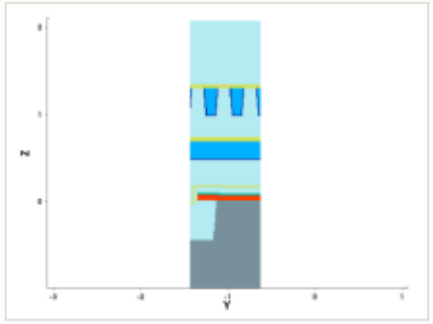

y cut at -1.035 µm

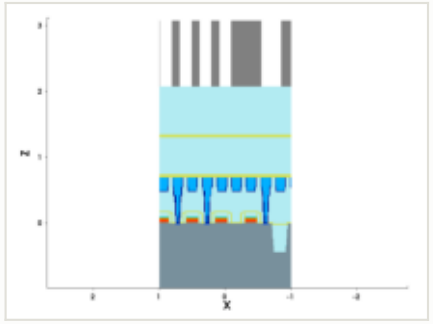

mask: layer 24:0 (OASIS)




this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

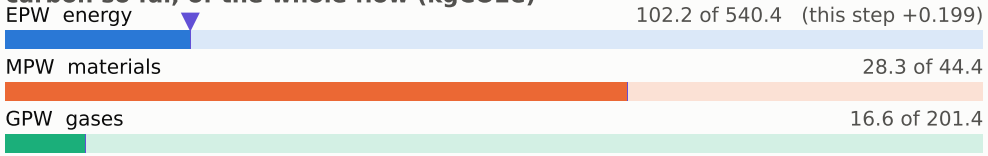

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

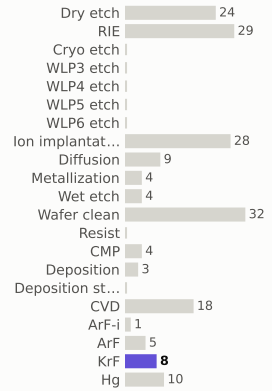

materials deposited (g)



gases emitted (g)

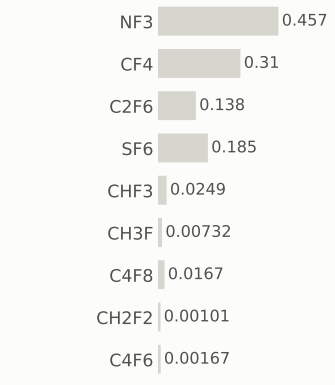


Step #1890: RIE

etch_anisotropic · RIE


1.04	148.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

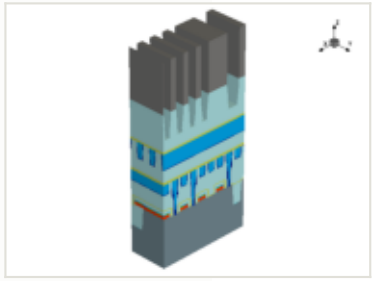






x cut at 0.000 µm

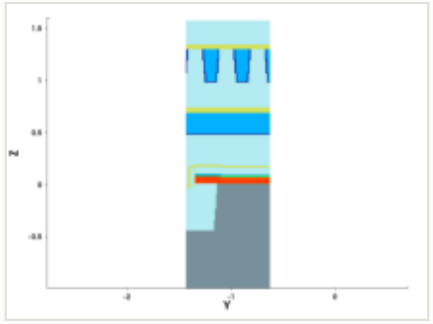

y cut at -1.035 µm

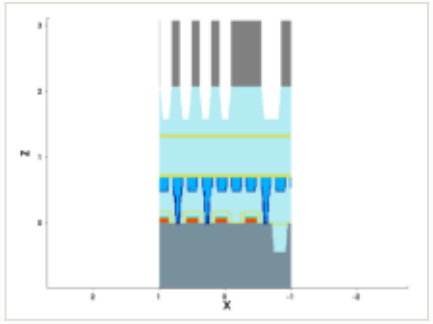

mask for this step


no mask for this step

this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

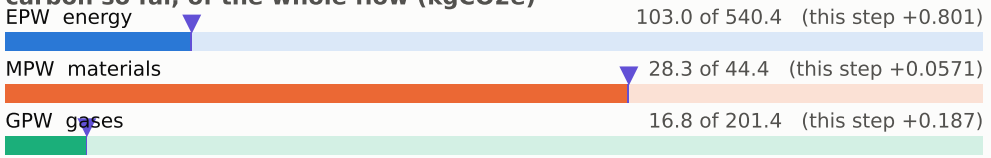


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

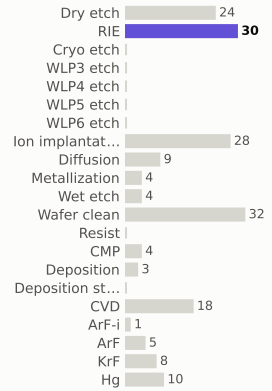

materials deposited (g)

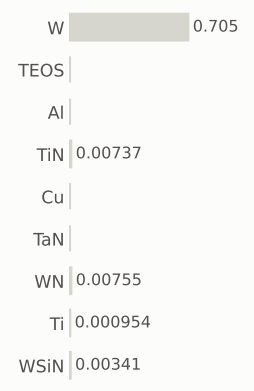

gases emitted (g)

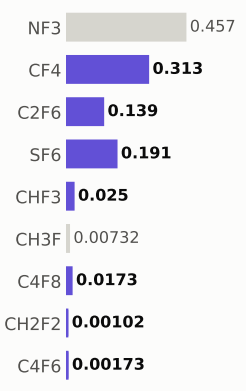


Step #1900: RIE


etch_anisotropic · RIE

1.04	149.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

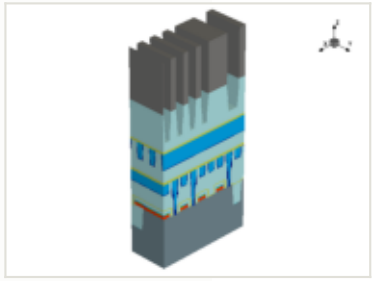

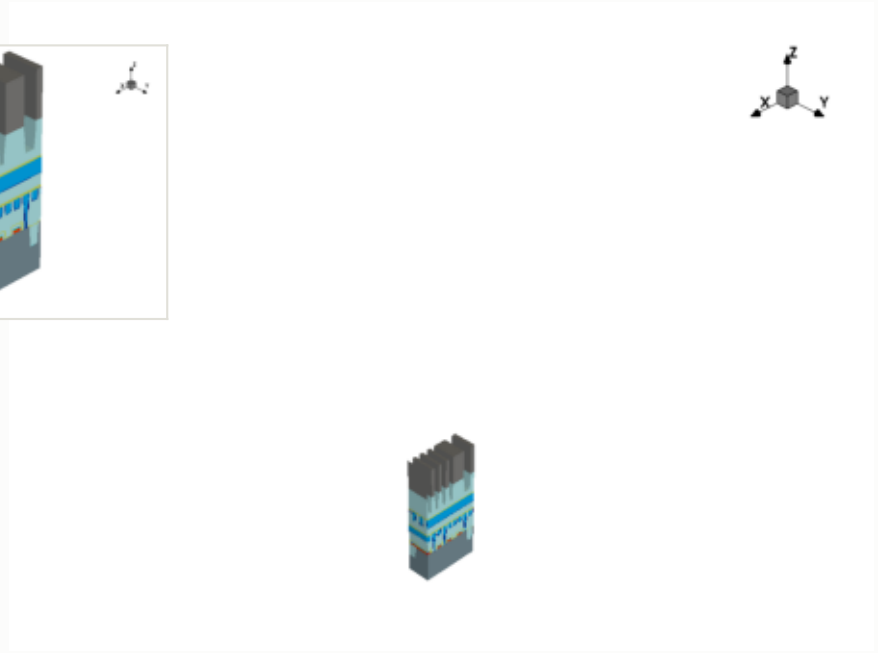


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

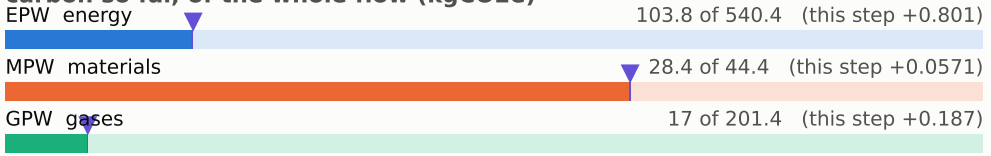


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

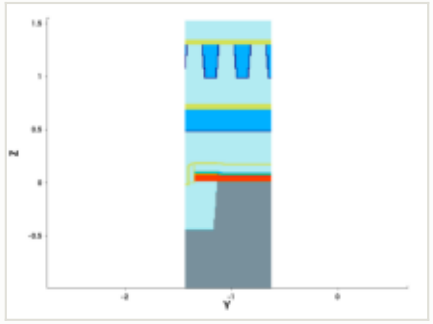


y cut at -1.035 µm

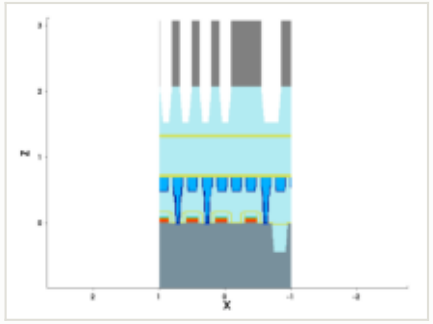


mask for this step

no mask for this step


steps by process area

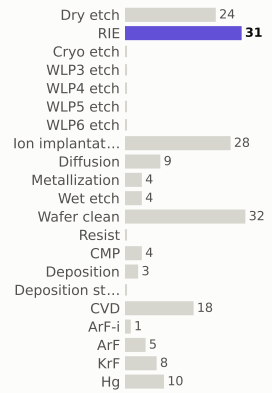

materials deposited (g)

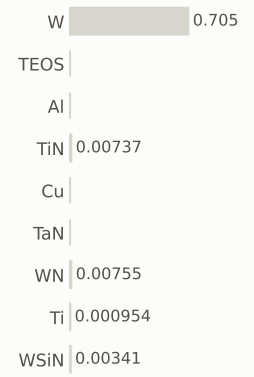

gases emitted (g)




Step #1910: Dry_etch

etch_strip · Dry_etch

0.801	149.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

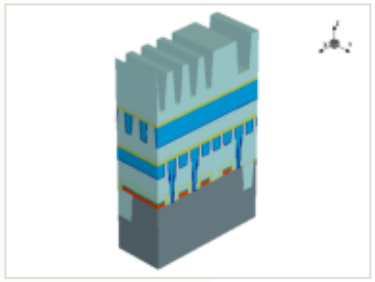






x cut at 0.000 µm

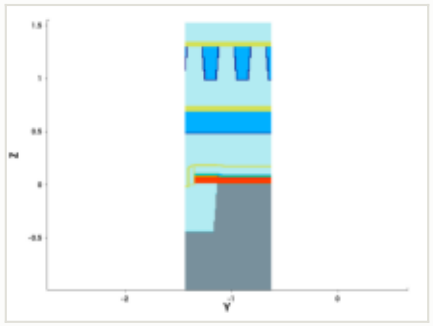

y cut at -1.035 µm

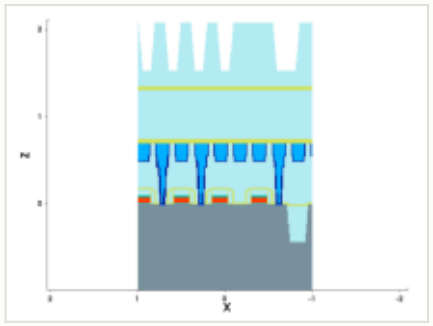


mask for this step

no mask for this step

this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

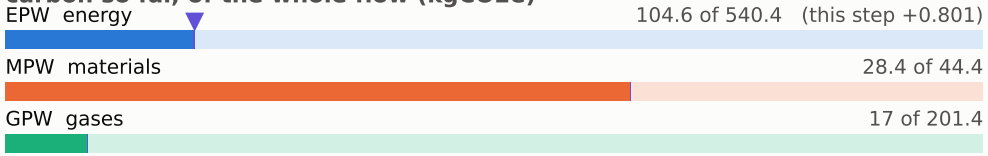

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

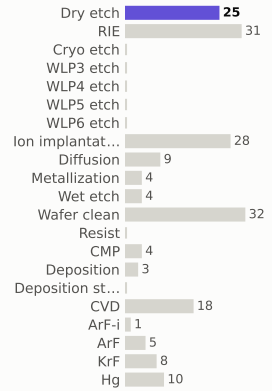

materials deposited (g)



gases emitted (g)

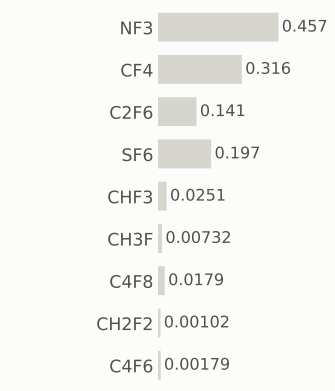


Step #1920: Wafer_clean

clean · Wafer_clean

0.169	150.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

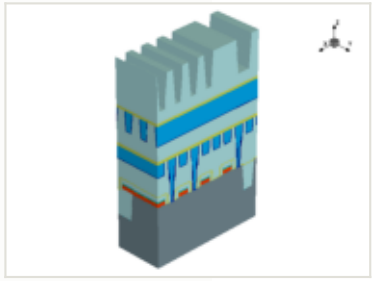






x cut at 0.000 µm

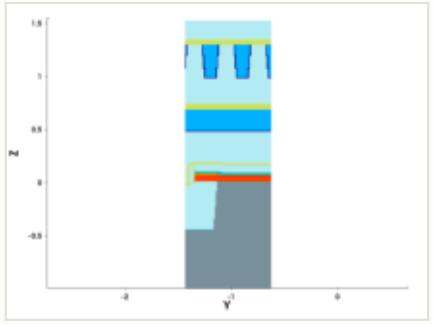

y cut at -1.035 µm

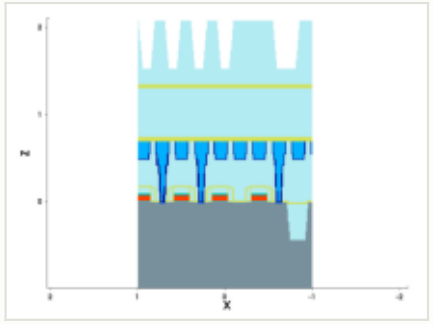

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

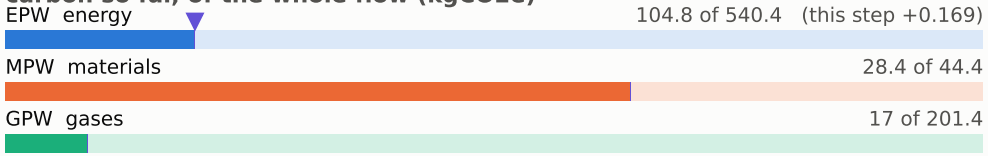

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

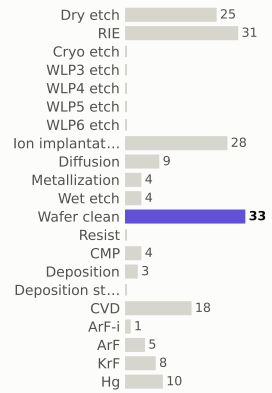

materials deposited (g)



gases emitted (g)

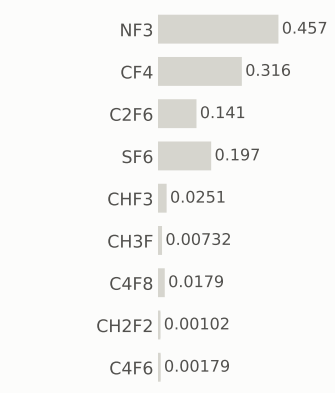


Step #1930: CVD

depo_isotropic · CVD

1.31	151.4	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

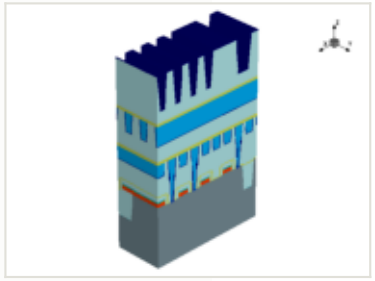






this step

process area	CVD
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0319 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

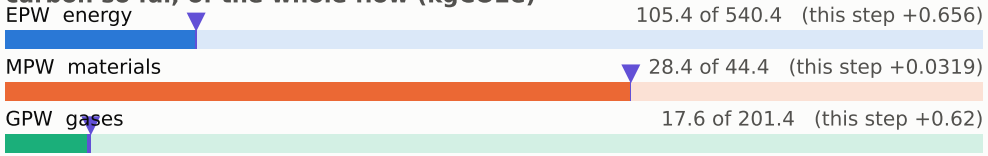


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

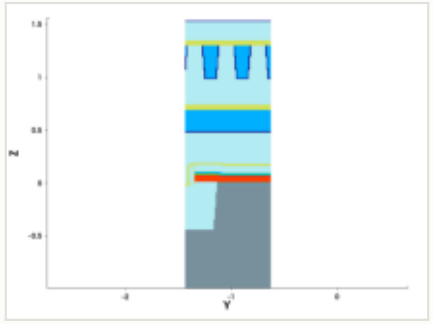


y cut at -1.035 µm

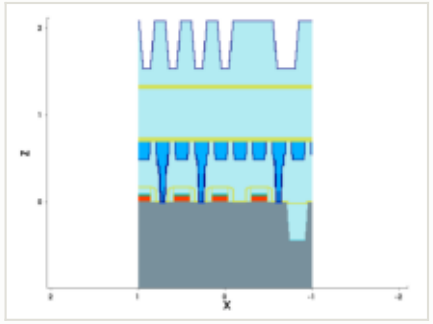


mask for this step

no mask for this step


steps by process area

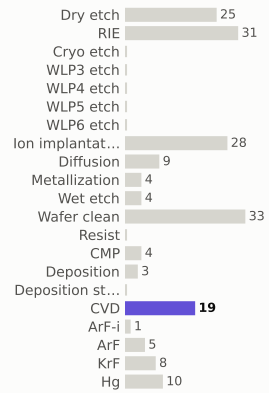

materials deposited (g)

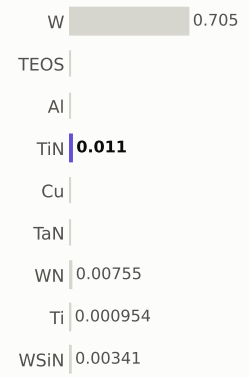

gases emitted (g)

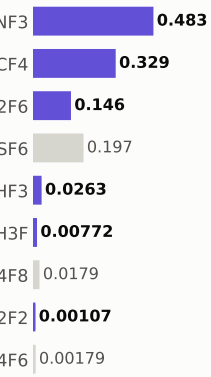


Step #1940: Metallization

depo_isotropic · Metallization

1.28	152.7	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

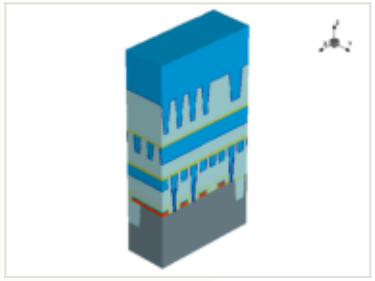






x cut at 0.000 µm

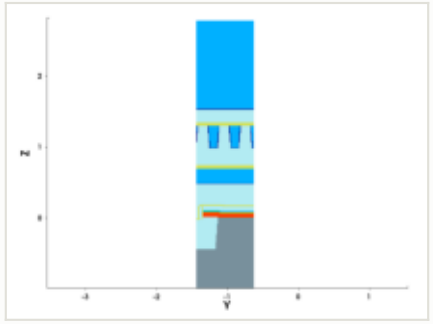

y cut at -1.035 µm

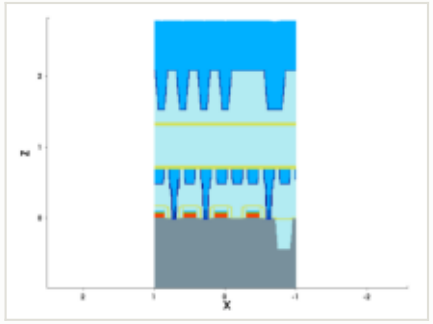

mask for this step


no mask for this step

this step


process area	Metallization
material	W
thickness	0.7 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0724 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.28 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

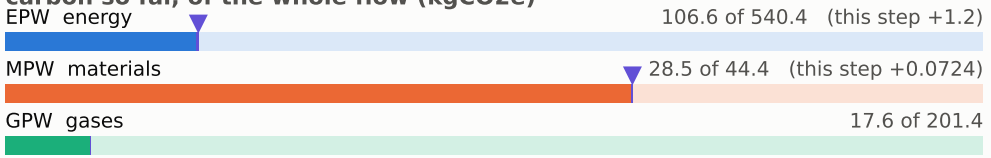


embodied carbon up to each step (kgCO2e per wafer)

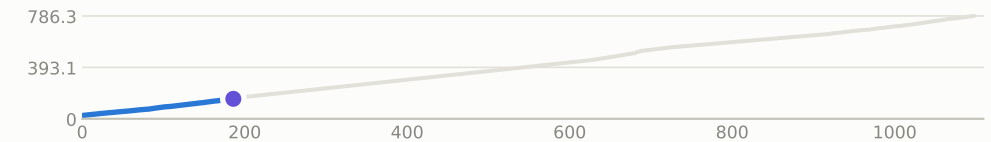


steps by process area

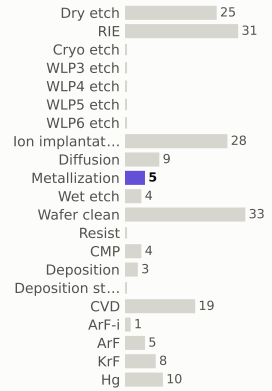

materials deposited (g)

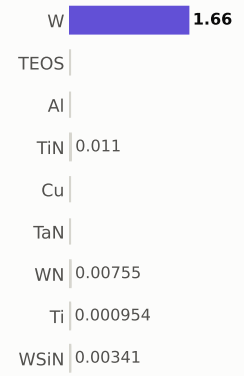

gases emitted (g)

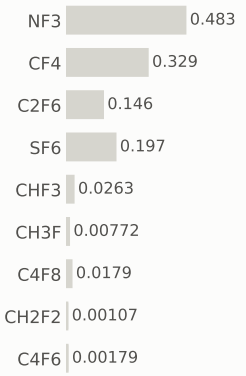


Step #1950: CMP

etch_cmp · CMP


0.169	152.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

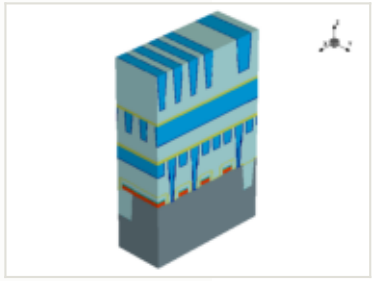






x cut at 0.000 µm

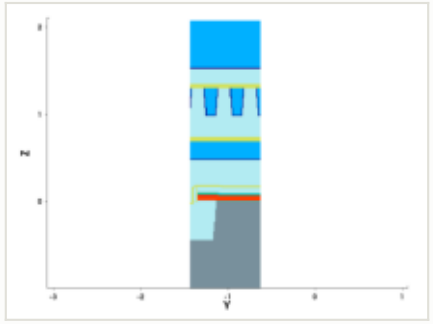

y cut at -1.035 µm

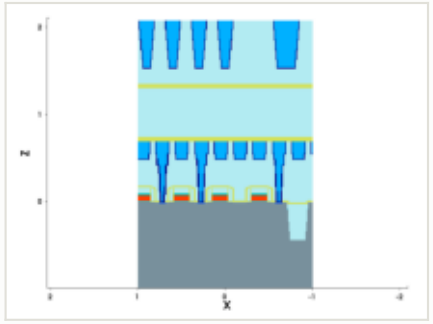


mask for this step

no mask for this step

this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

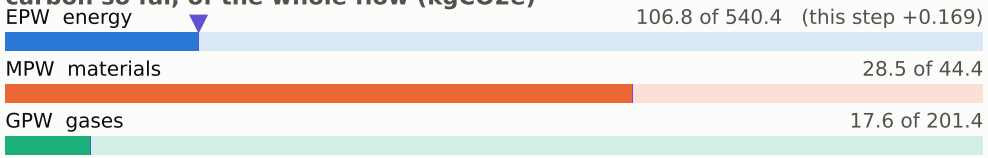


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

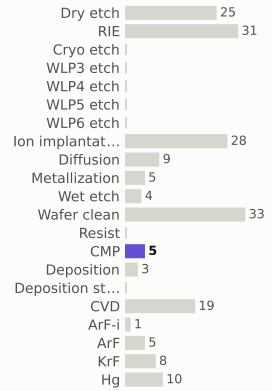

materials deposited (g)

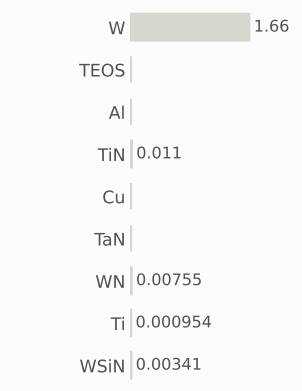

gases emitted (g)

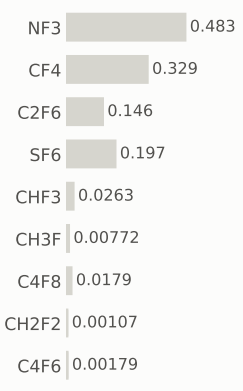


Step #1960: Wafer_clean

clean · Wafer_clean


0.169	153.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

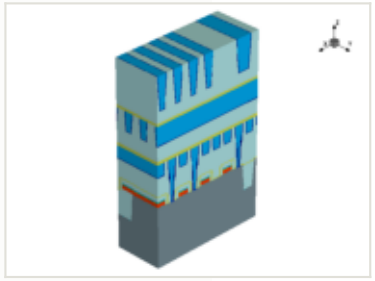






x cut at 0.000 µm

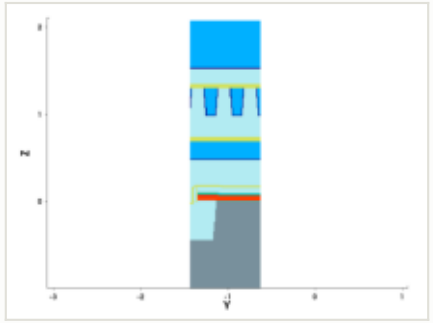

y cut at -1.035 µm

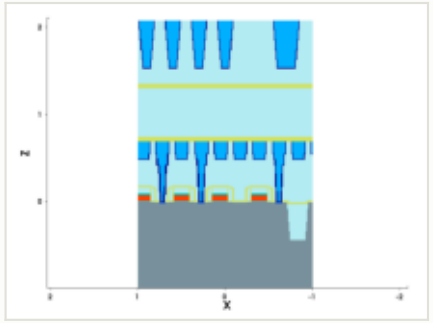

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

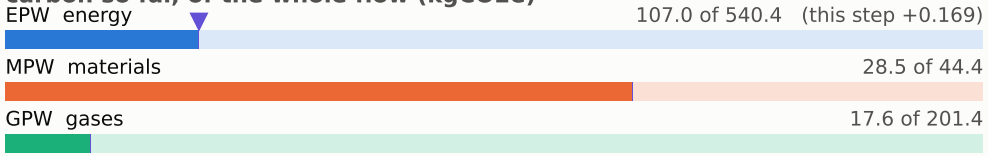


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

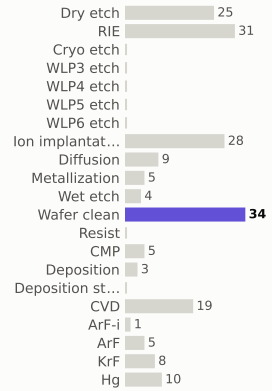

materials deposited (g)

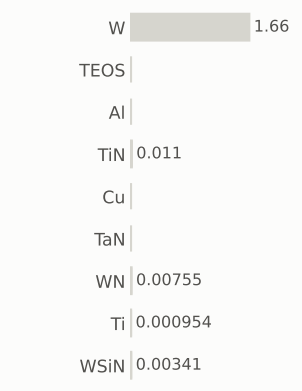

gases emitted (g)

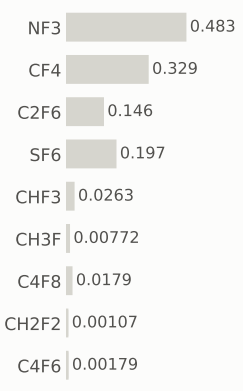


Step #1970: CVD

depo_isotropic · CVD

1.31	154.3	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

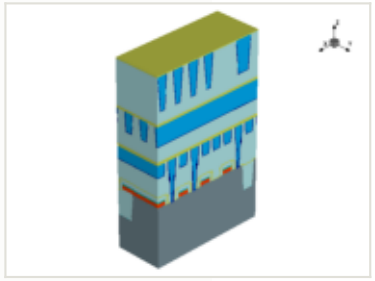






this step

process area	CVD
material	—
thickness	0.019 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

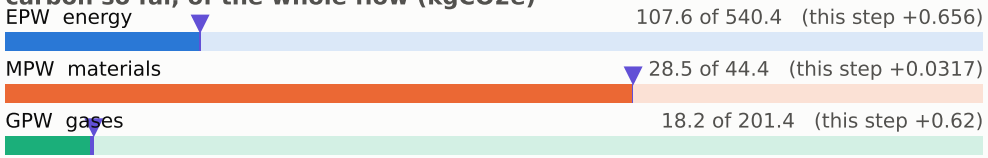


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

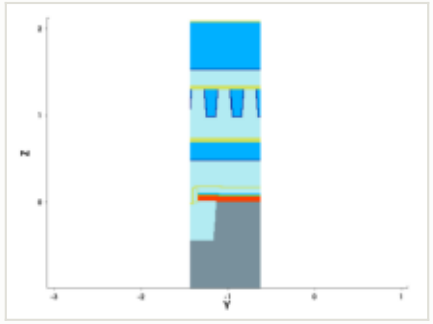


y cut at -1.035 µm

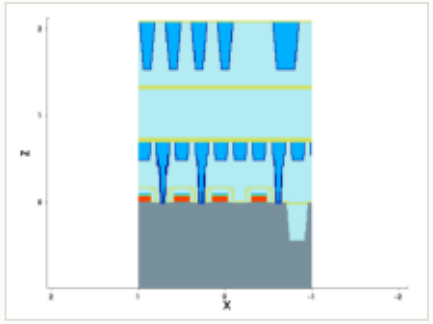


mask for this step

no mask for this step


steps by process area

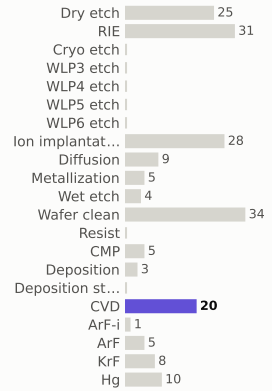

materials deposited (g)



gases emitted (g)

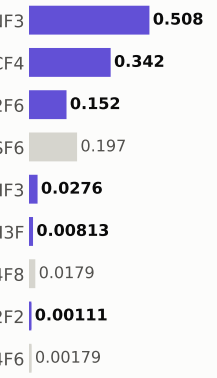


Step #1980: CVD

depo_isotropic · CVD

1.31	155.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

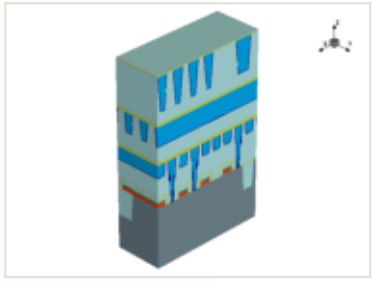






x cut at 0.000 µm

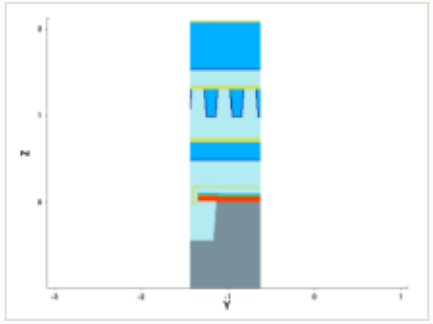

y cut at -1.035 µm

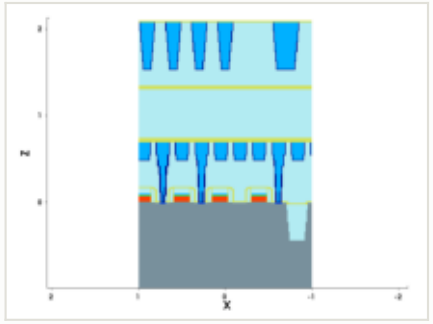

mask for this step


no mask for this step

this step

process area	CVD
material	—
thickness	0.002 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

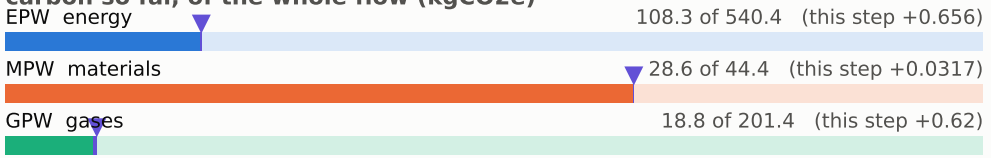


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

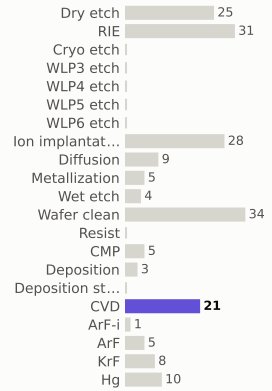

materials deposited (g)



gases emitted (g)

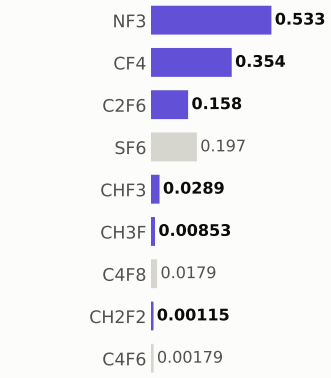


Step #1990: CVD

depo_isotropic · CVD

1.31	157.0	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

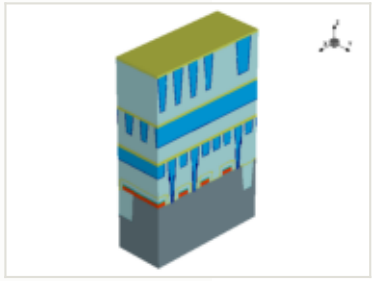






this step

process area	CVD
material	—
thickness	0.019 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

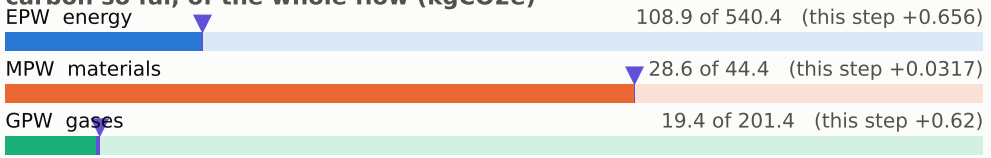


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

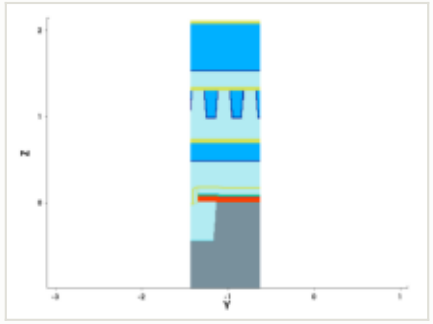


y cut at -1.035 µm

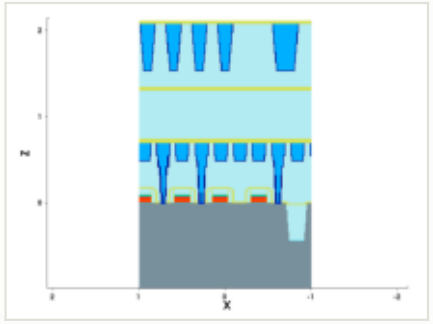


mask for this step

no mask for this step


steps by process area

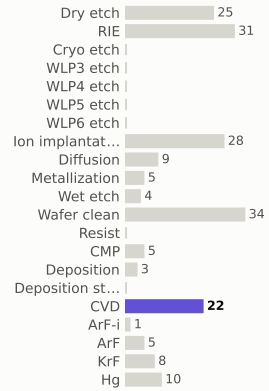

materials deposited (g)

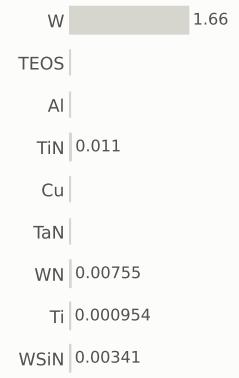

gases emitted (g)




Step #2000: CVD

depo_isotropic · CVD

1.31	158.3	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

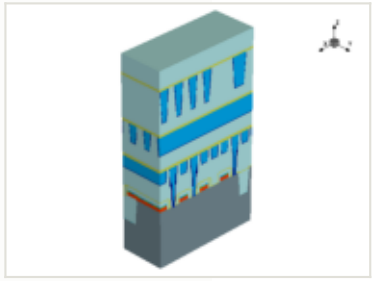






this step

process area	CVD
material	—
thickness	0.31 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

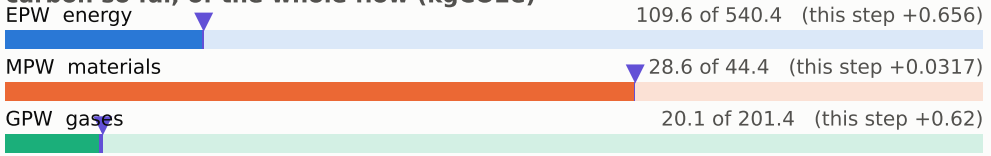


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

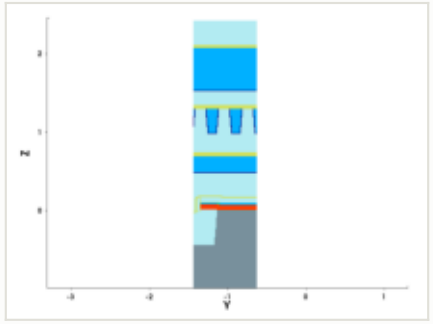


y cut at -1.035 µm

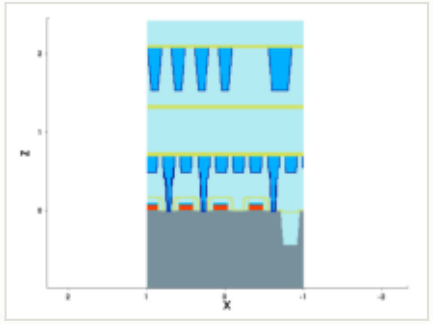


mask for this step

no mask for this step


steps by process area

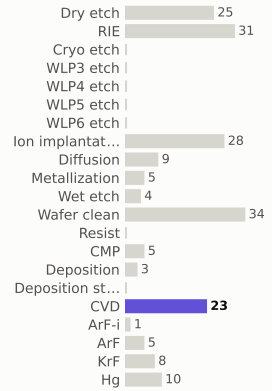

materials deposited (g)

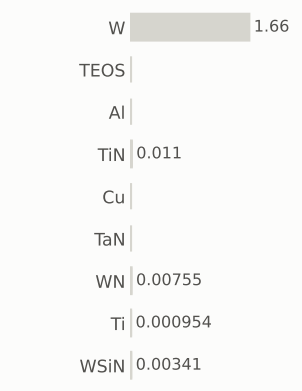

gases emitted (g)

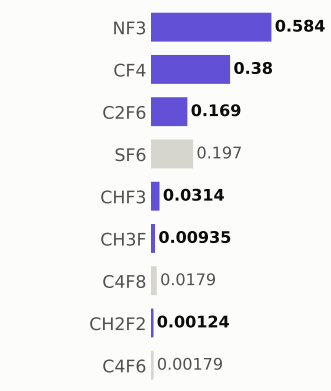


Step #2020: CVD

depo_isotropic · CVD

1.31	159.6	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

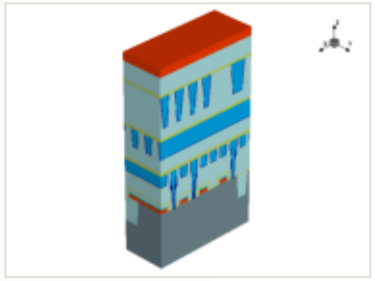






this step

process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

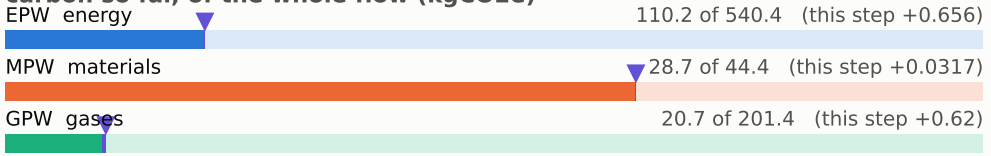


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

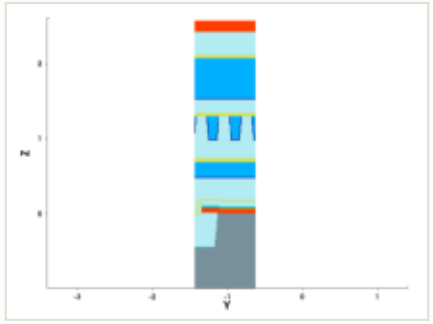


y cut at -1.035 µm

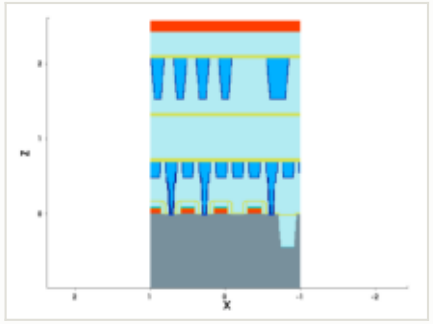

mask for this step

no mask for this step


steps by process area

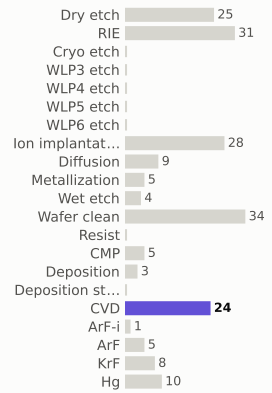

materials deposited (g)



gases emitted (g)




Step #2030: CVD

depo_isotropic · CVD

1.31	160.9	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

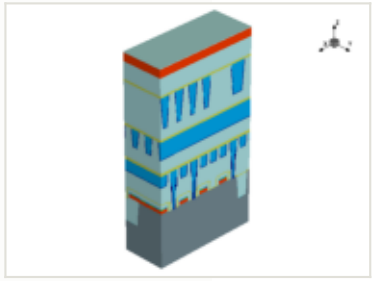






this step

process area	CVD
material	—
thickness	0.012 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

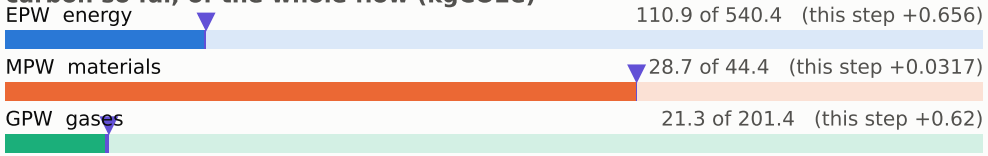


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

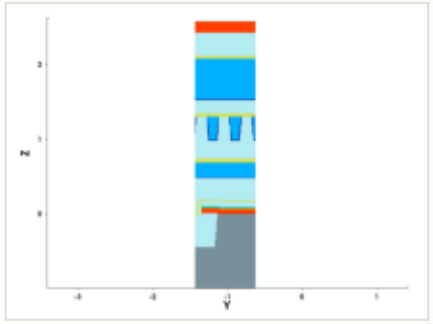


y cut at -1.035 µm

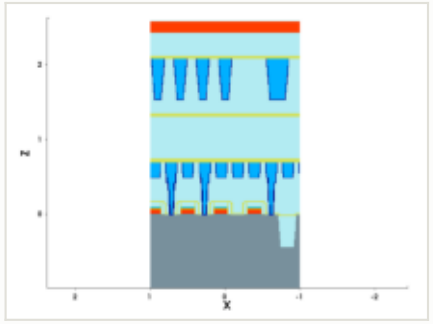

mask for this step

no mask for this step


steps by process area

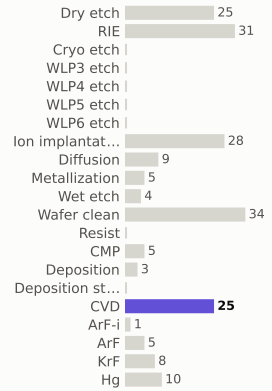

materials deposited (g)



gases emitted (g)

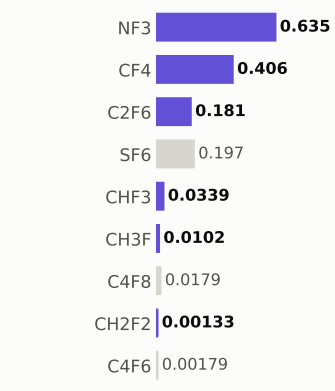


Step #2040: Diffusion

implant_ellipsoid · Diffusion


0.801	161.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

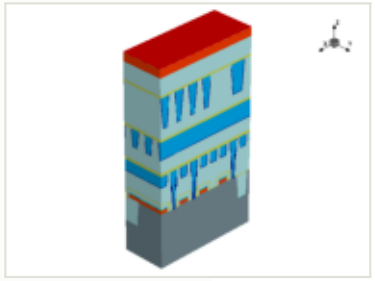






x cut at 0.000 µm

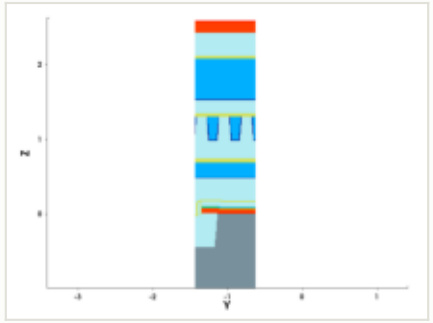

y cut at -1.035 µm

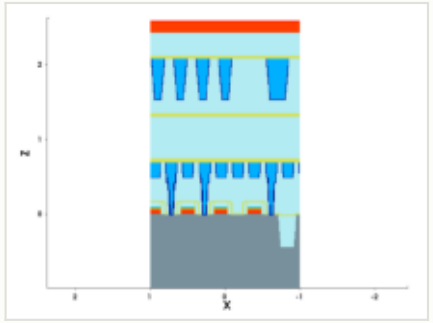

mask for this step


no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

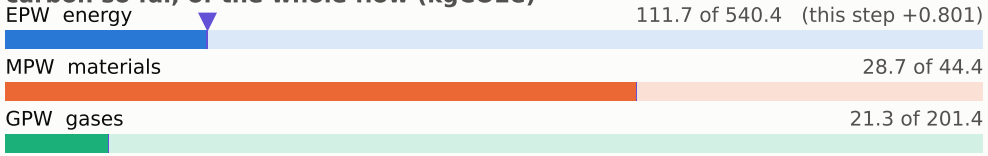


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

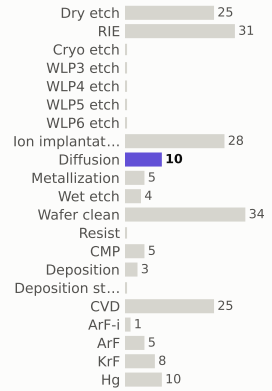

materials deposited (g)

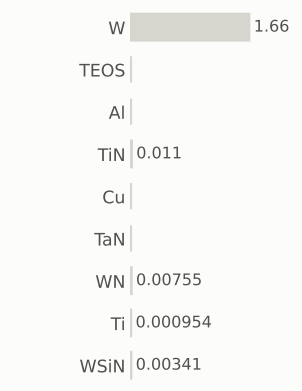

gases emitted (g)

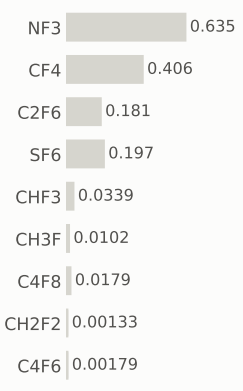


Step #2050: Diffusion


anneal · Diffusion

0.801	162.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

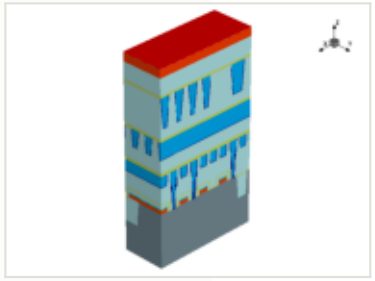


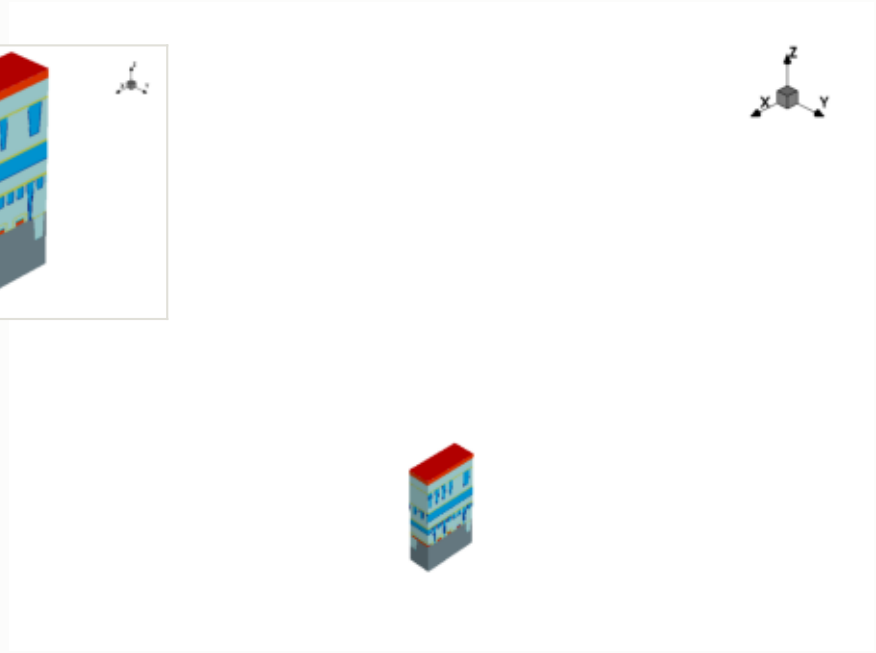

x cut at 0.000 µm

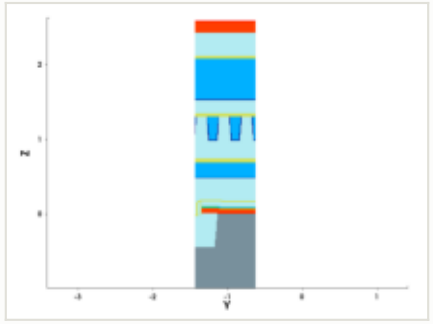

y cut at -1.035 µm

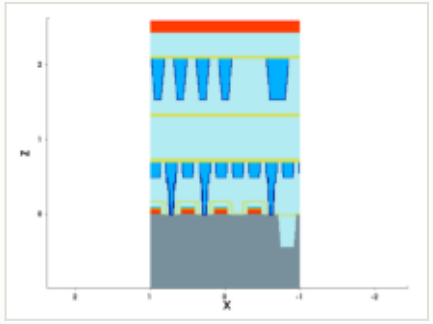

mask for this step

no mask for this step


this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp


carbon so far, of the whole flow (kgCO2e)

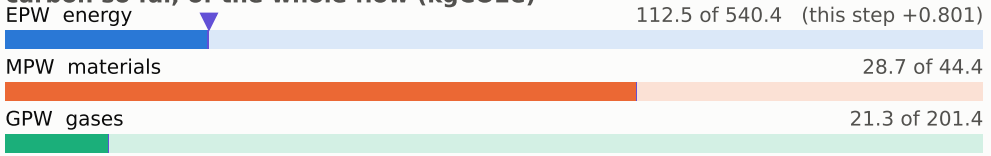


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

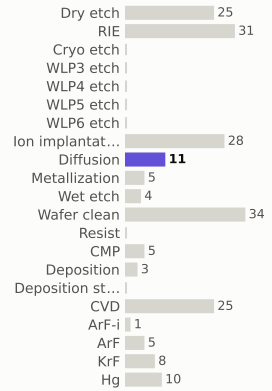

materials deposited (g)

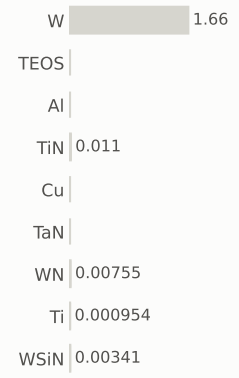

gases emitted (g)

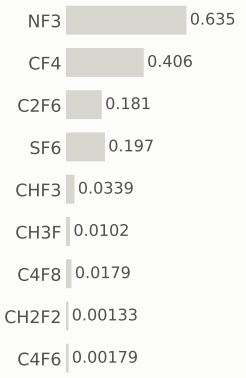


Step #2060: CVD

depo_isotropic · CVD

1.31	163.8	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

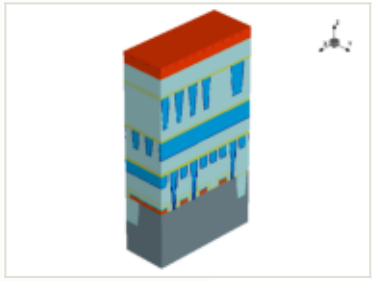






x cut at 0.000 µm

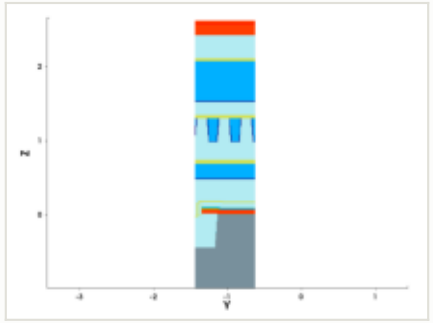

y cut at -1.035 µm

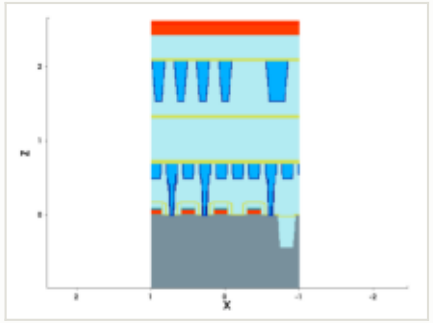

mask for this step


no mask for this step

this step

process area	CVD
material	—
thickness	0.036 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

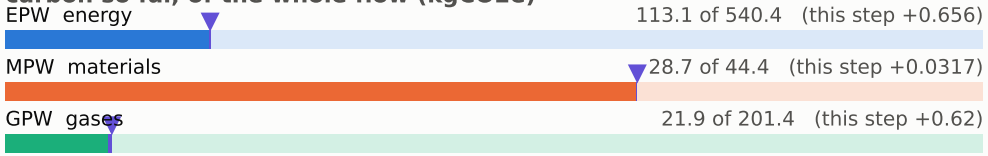

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

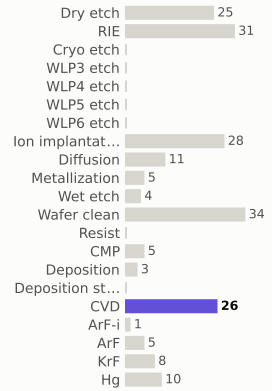

materials deposited (g)



gases emitted (g)

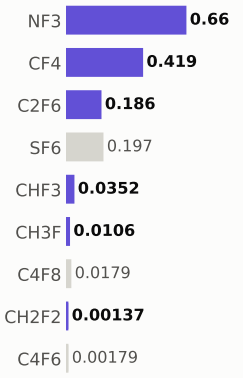


Step #2070: CVD

depo_isotropic · CVD


1.31	165.1	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

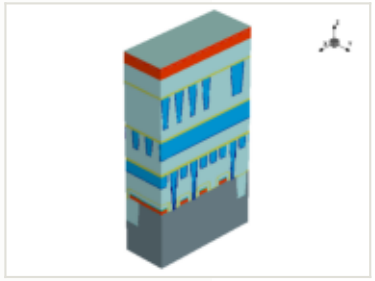






this step

process area	CVD
material	—
thickness	0.007 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

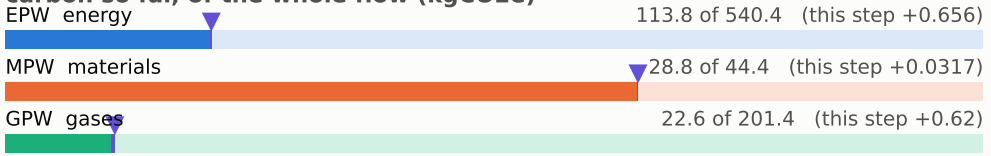


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

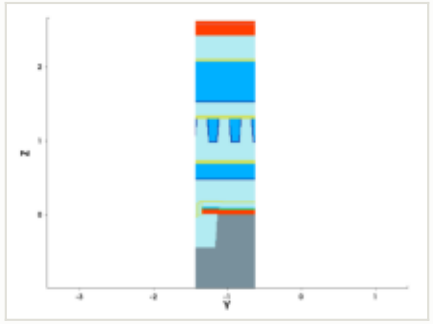


y cut at -1.035 µm

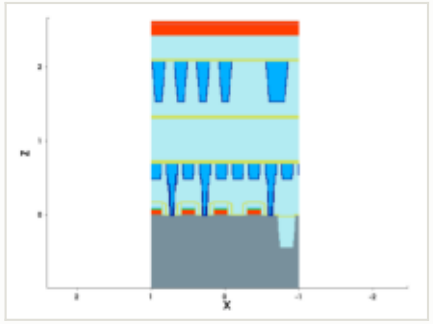


mask for this step

no mask for this step


steps by process area

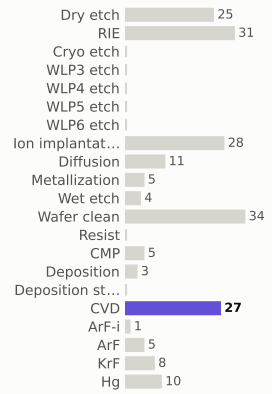

materials deposited (g)

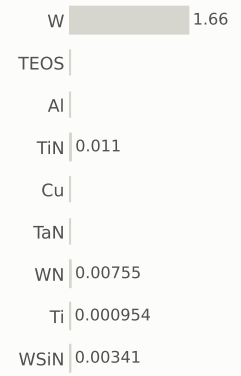

gases emitted (g)

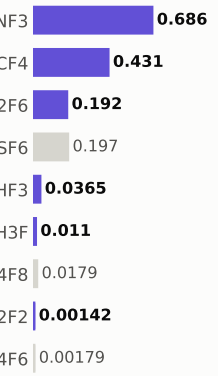


Step #2080: Diffusion

implant_ellipsoid · Diffusion


0.801	165.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

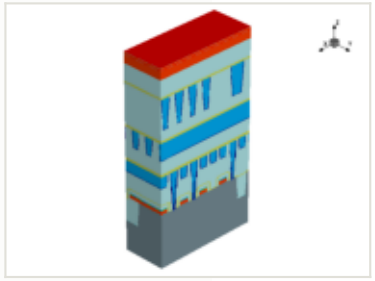






x cut at 0.000 µm

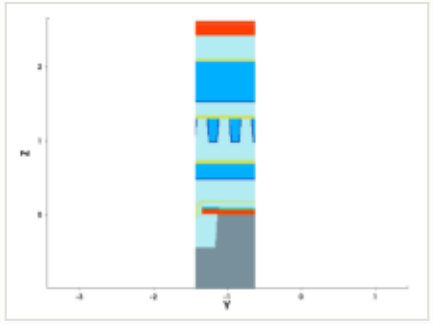

y cut at -1.035 µm

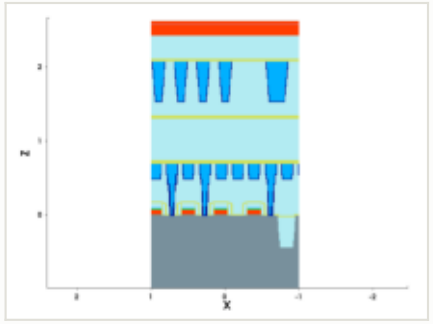

mask for this step


no mask for this step

this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

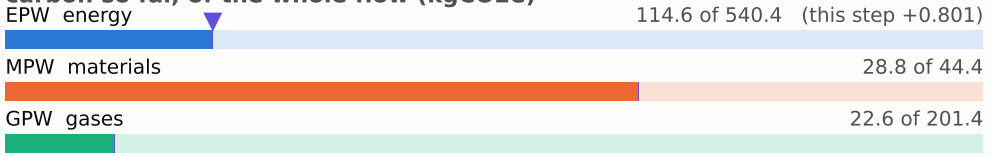


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

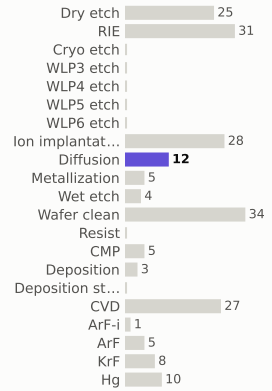

materials deposited (g)

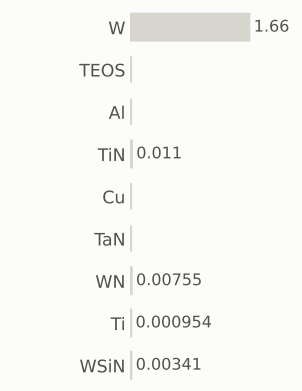

gases emitted (g)

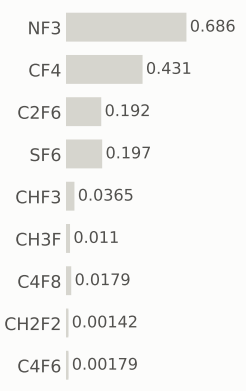


Step #2090: Diffusion

anneal · Diffusion


0.801	166.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

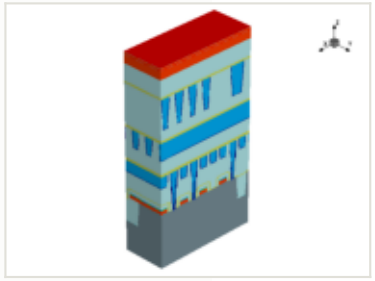






x cut at 0.000 µm

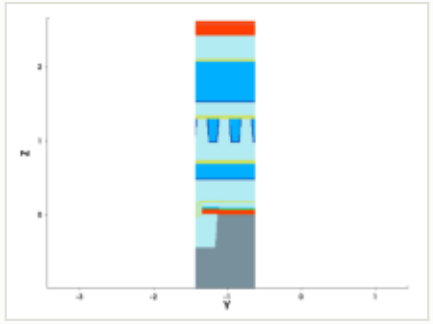

y cut at -1.035 µm

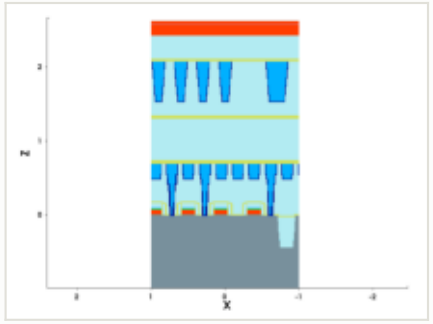

mask for this step

no mask for this step


this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp


carbon so far, of the whole flow (kgCO2e)

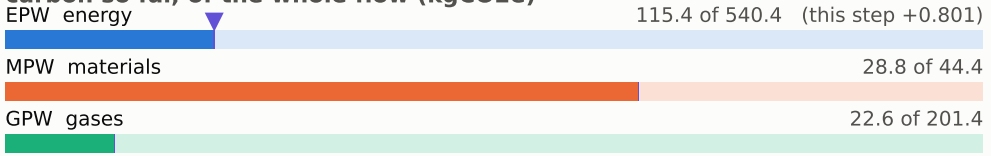


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

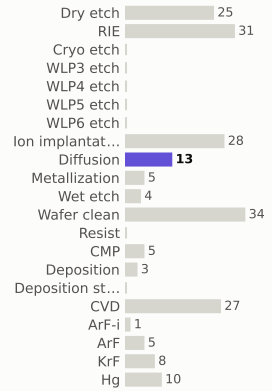

materials deposited (g)

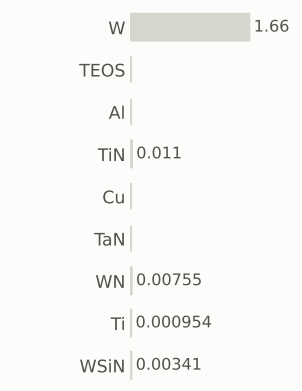

gases emitted (g)

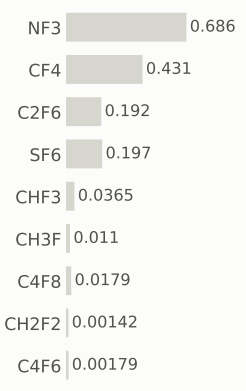


Step #2100: CVD

depo_isotropic · CVD

1.31	168.0	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

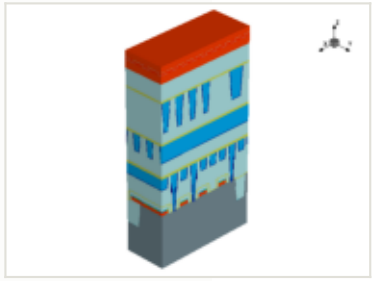






this step

process area	CVD
material	—
thickness	0.105 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

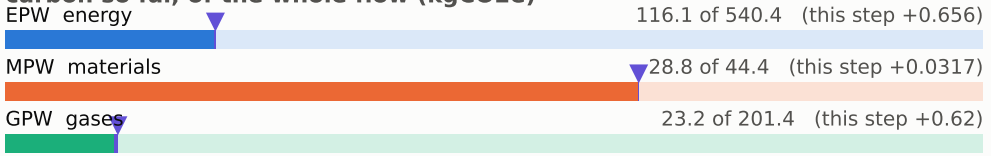


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

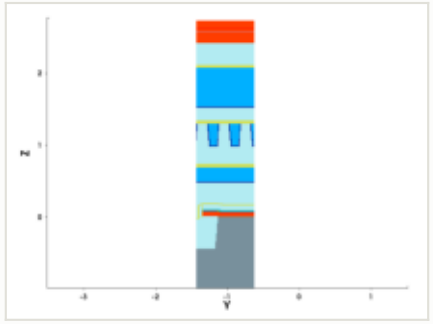


y cut at -1.035 µm

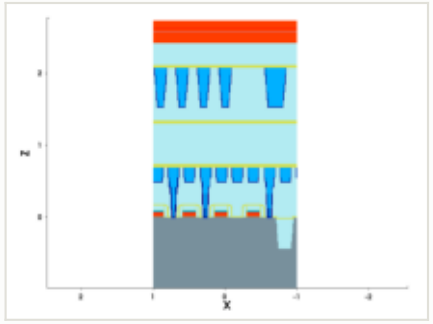


mask for this step

no mask for this step


steps by process area

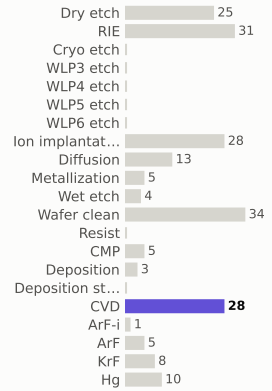

materials deposited (g)

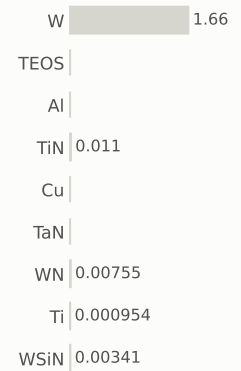

gases emitted (g)

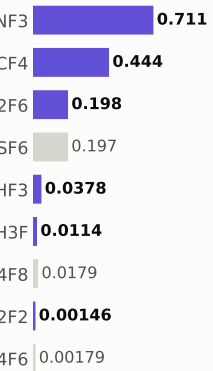


Step #2110: KrF

litho_patterning · KrF

0.199	168.2	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

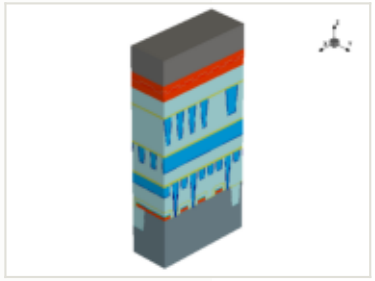






this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

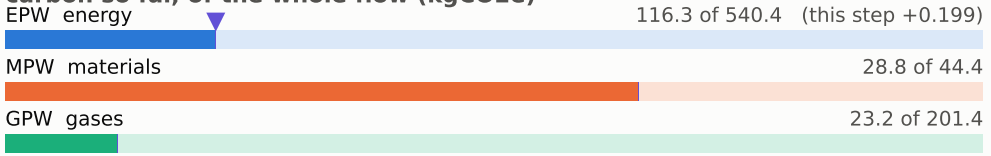


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

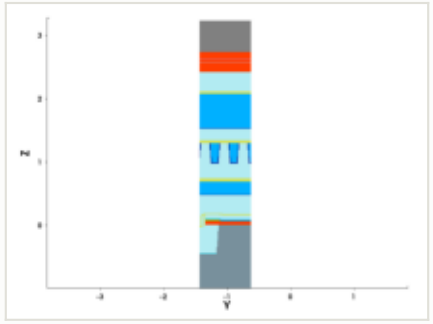


y cut at -1.035 µm

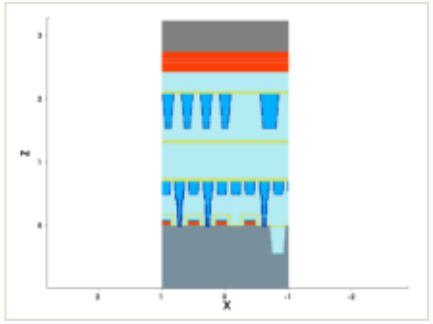

mask: layer 25:0, positive (OASIS)




steps by process area

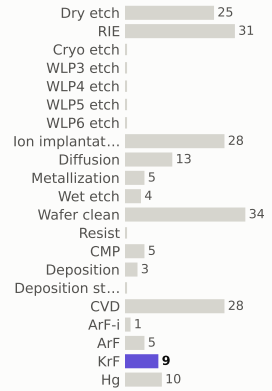

materials deposited (g)



gases emitted (g)

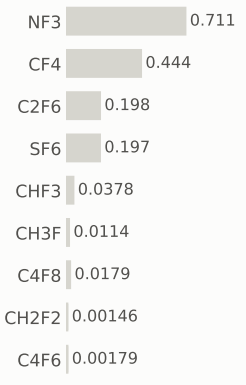


Step #2120: RIE

etch_anisotropic · RIE


1.04	169.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

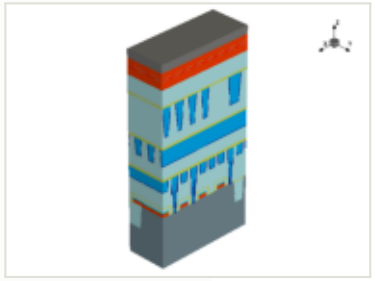






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

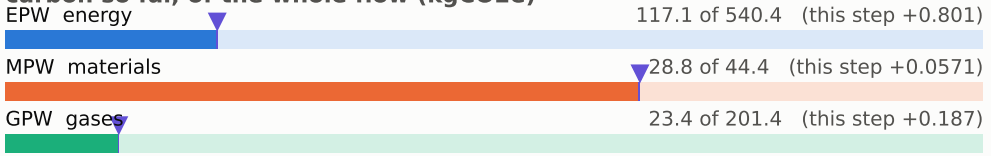


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

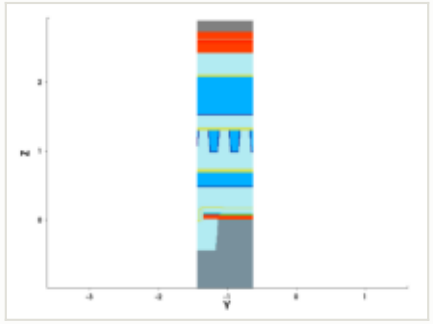


y cut at -1.035 µm

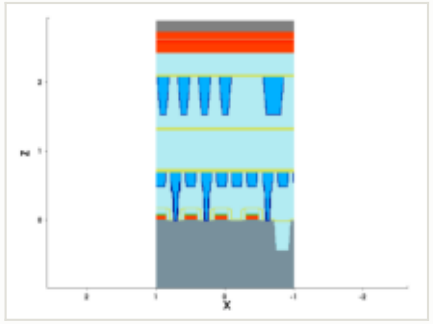


mask for this step

no mask for this step


steps by process area

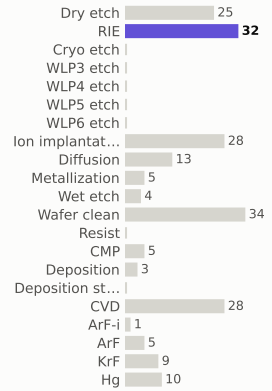

materials deposited (g)



gases emitted (g)

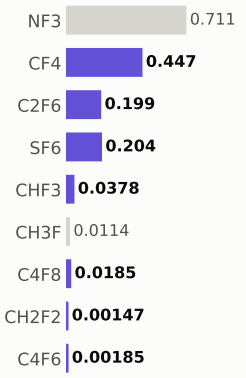


Step #2130: Dry_etch

etch_strip · Dry_etch

0.801	170.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

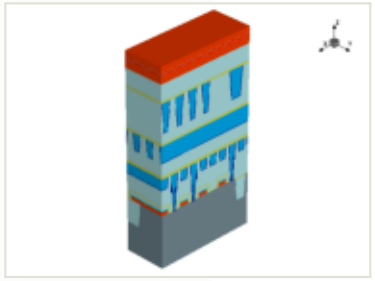






x cut at 0.000 µm

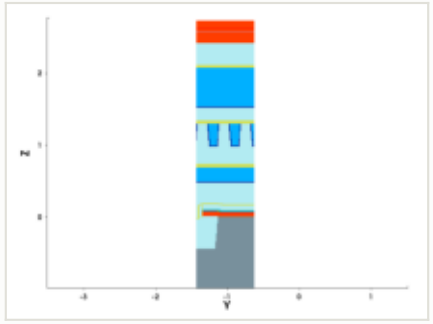

y cut at -1.035 µm

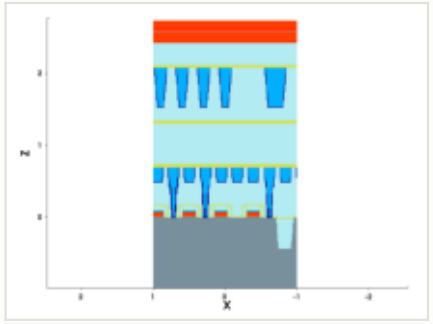

mask for this step


no mask for this step

this step


process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

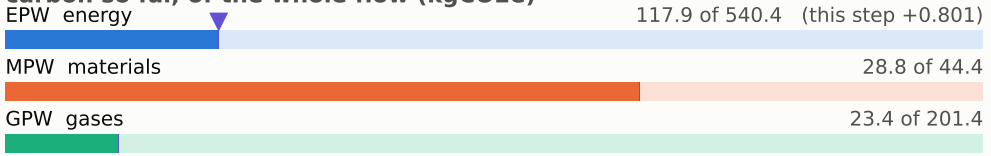


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

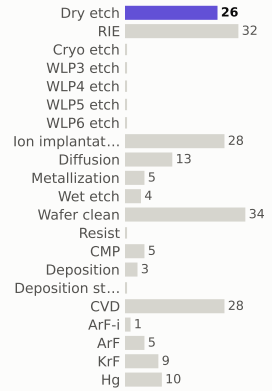

materials deposited (g)

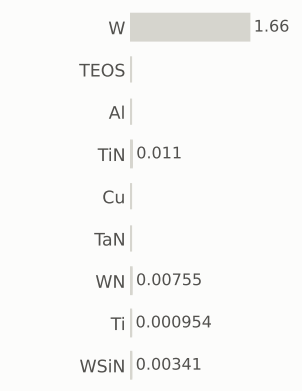

gases emitted (g)

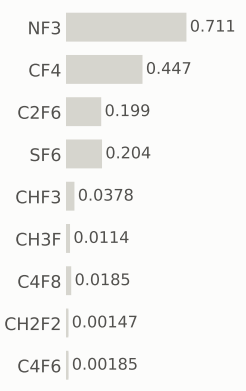


Step #2140: Wafer_clean

clean · Wafer_clean

0.169	170.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

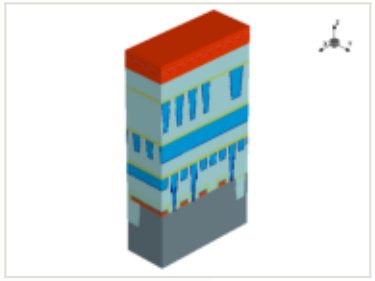






x cut at 0.000 µm

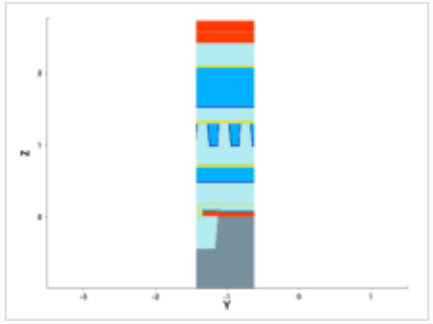

y cut at -1.035 µm

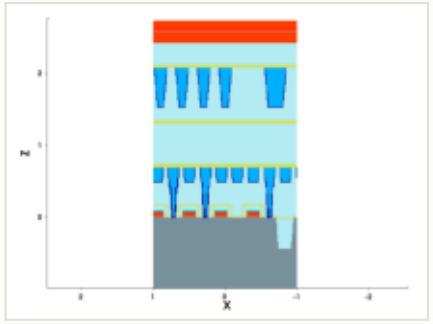

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

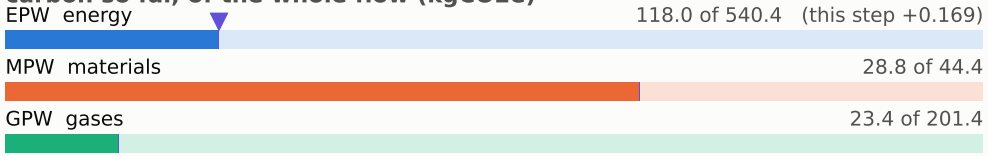


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

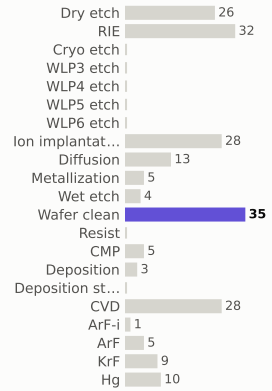

materials deposited (g)

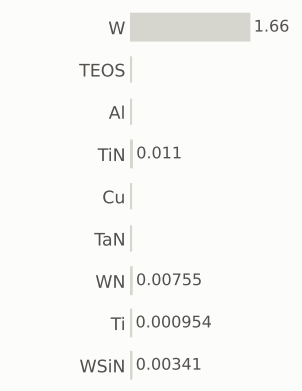

gases emitted (g)

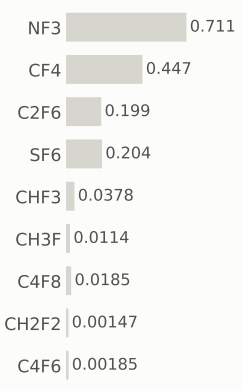


Step #2150: CVD

depo_isotropic · CVD

1.31	171.5	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

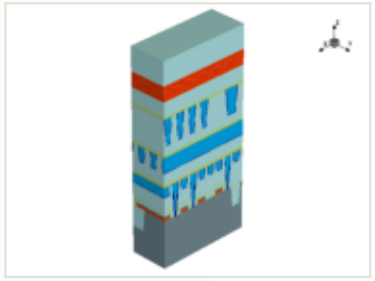






x cut at 0.000 µm

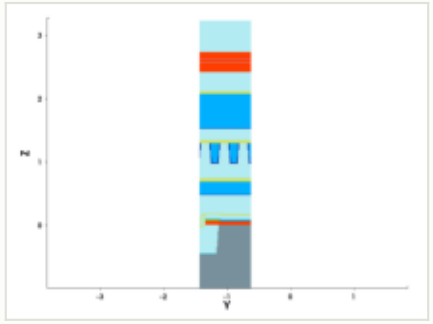

y cut at -1.035 µm

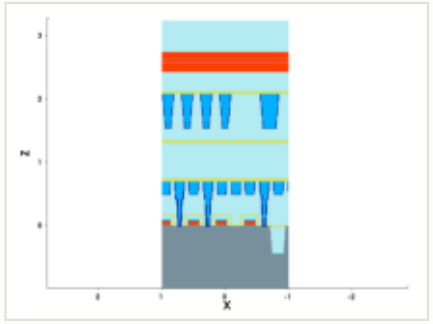

mask for this step


no mask for this step

this step

process area	CVD
material	—
thickness	0.5 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

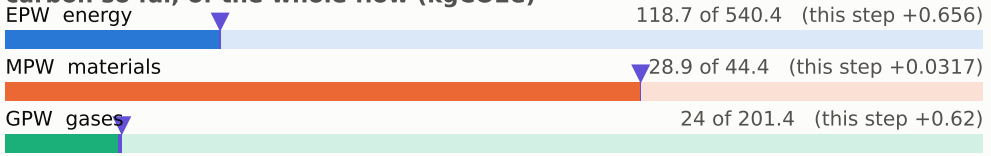

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

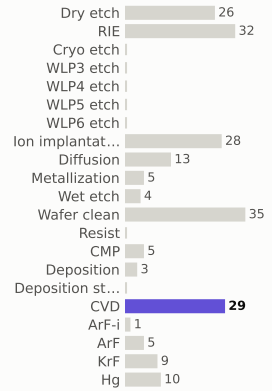

materials deposited (g)



gases emitted (g)

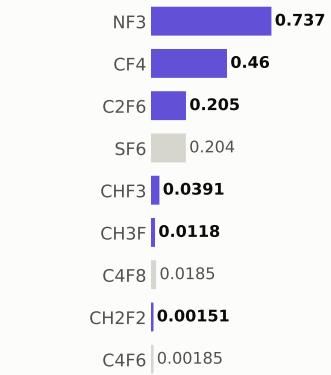


Step #2160: CMP

etch_cmp · CMP

0.169	171.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

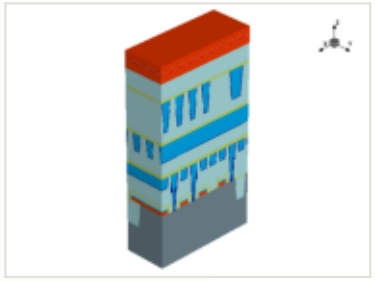






x cut at 0.000 µm

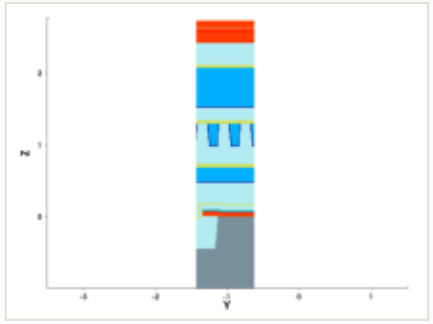

y cut at -1.035 µm

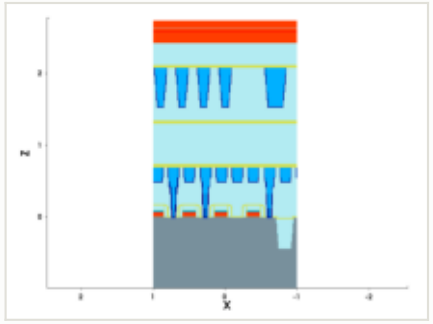

mask for this step


no mask for this step

this step


process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

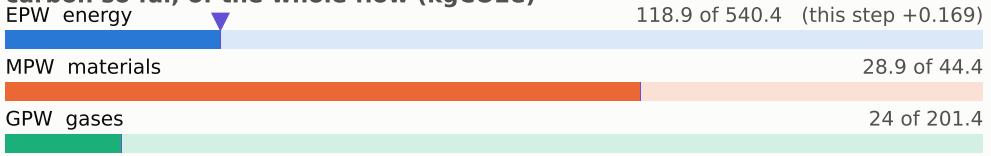


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

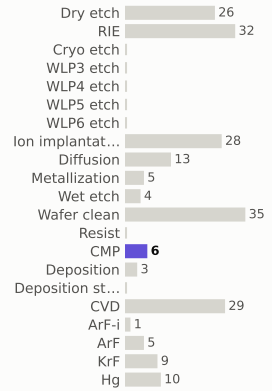

materials deposited (g)

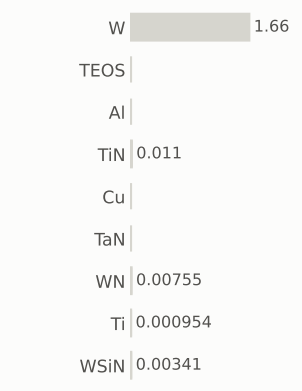

gases emitted (g)

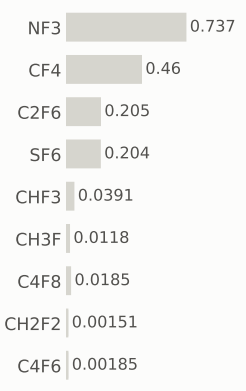


Step #2170: Wafer_clean

clean · Wafer_clean

0.169	171.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

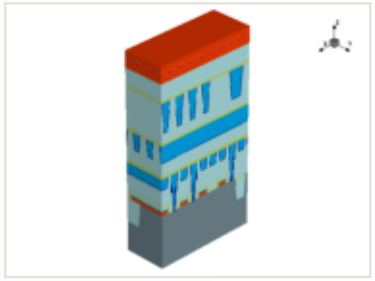






x cut at 0.000 µm

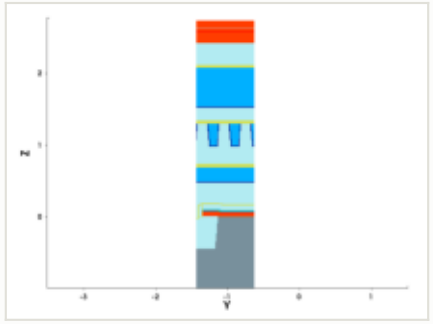

y cut at -1.035 µm

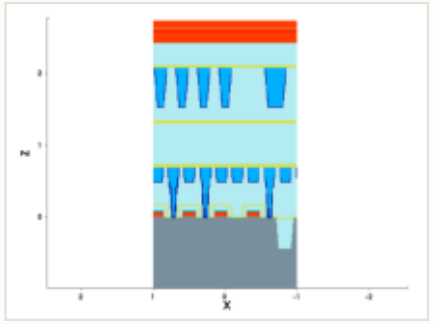

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

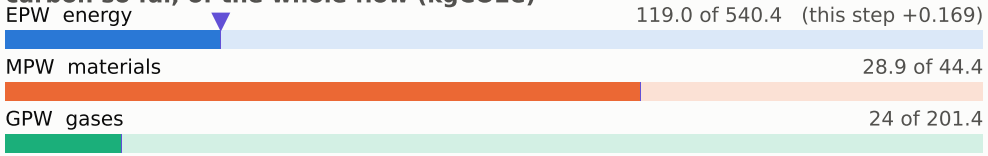


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

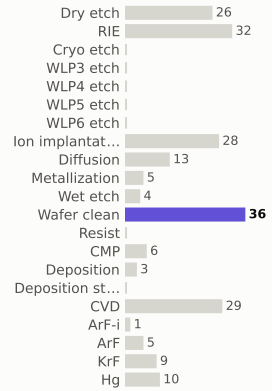

materials deposited (g)

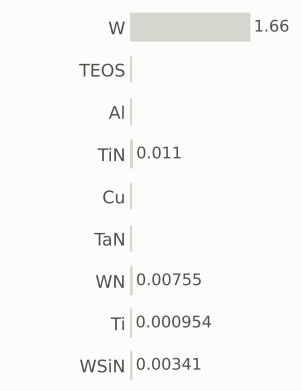

gases emitted (g)

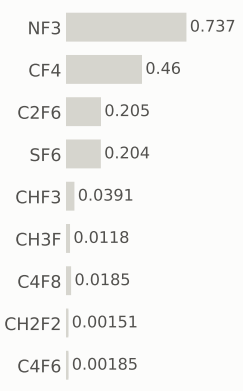


Step #2180: Wafer_clean

clean · Wafer_clean

0.169	172.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

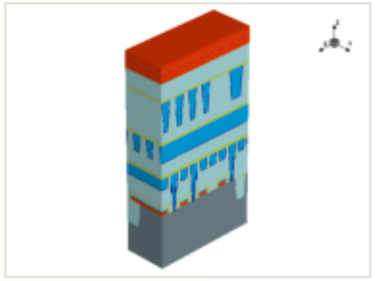




x cut at 0.000 µm

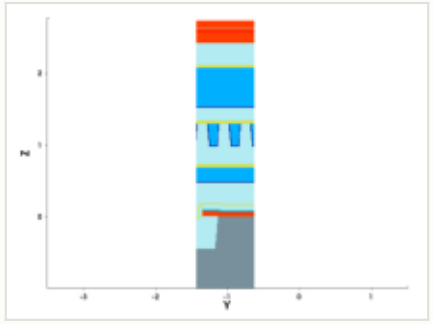

y cut at -1.035 µm

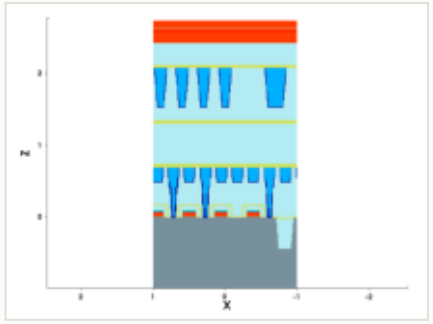

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

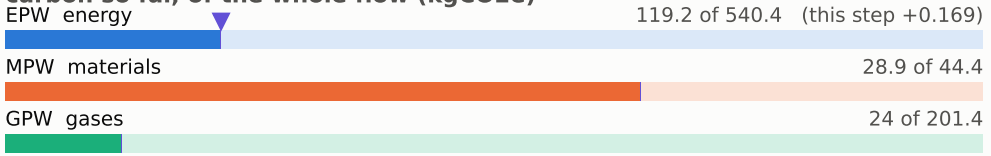


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

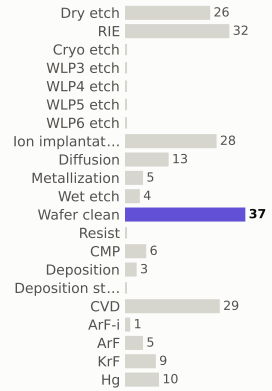

materials deposited (g)

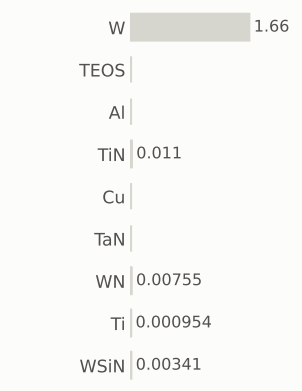

gases emitted (g)

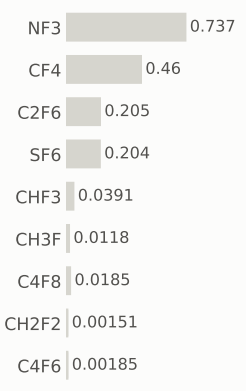


Step #2190: CVD

depo_isotropic · CVD

1.31	173.4	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

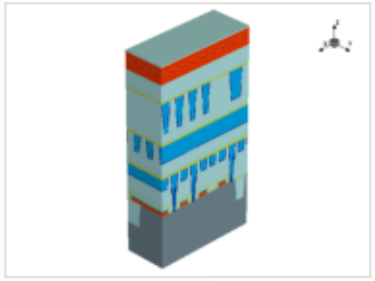






this step

process area	CVD
material	—
thickness	0.025 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

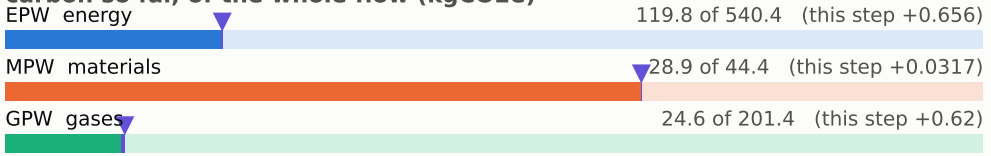


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

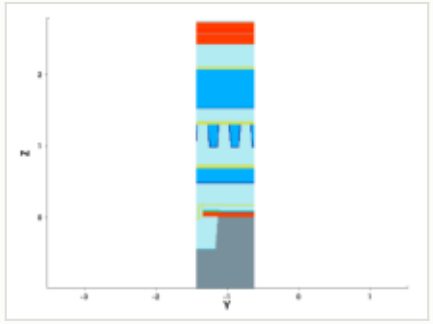


y cut at -1.035 µm

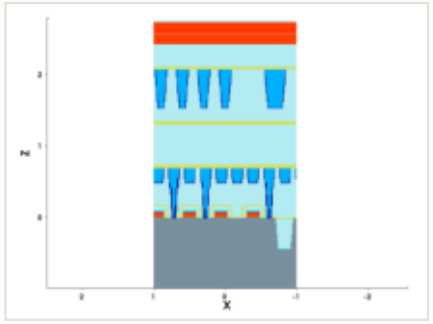


mask for this step

no mask for this step


steps by process area

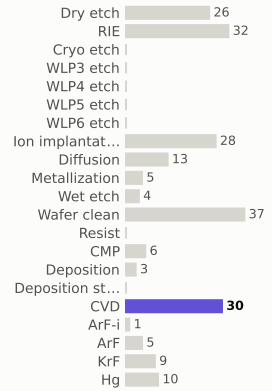

materials deposited (g)

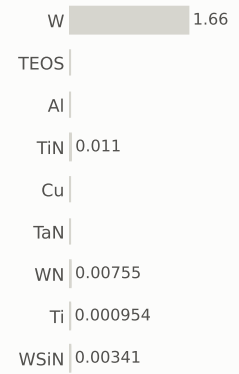

gases emitted (g)




Step #2200: ArF

litho_patterning · ArF

0.199	173.5	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

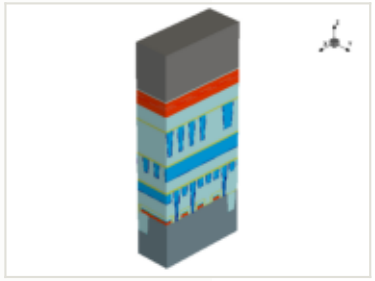






x cut at 0.000 µm

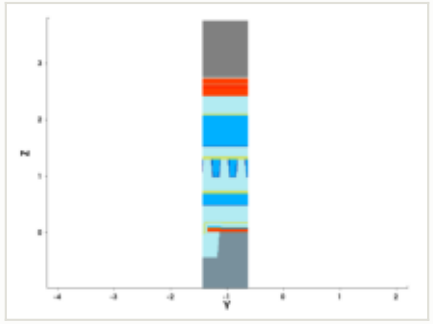

y cut at -1.035 µm

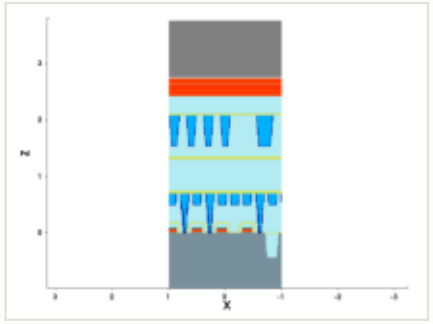

mask: layer 26:0 (OASIS)


nothing in the clip window

this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

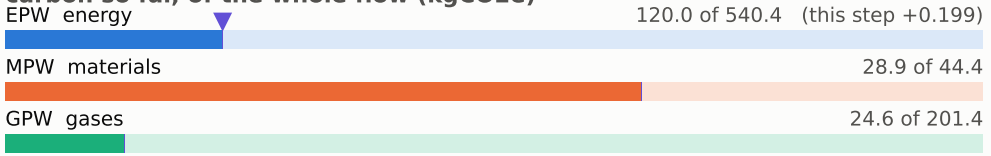


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

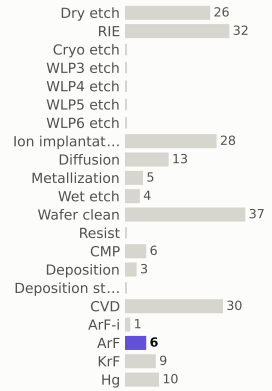

materials deposited (g)

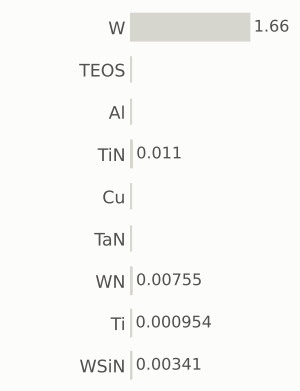

gases emitted (g)

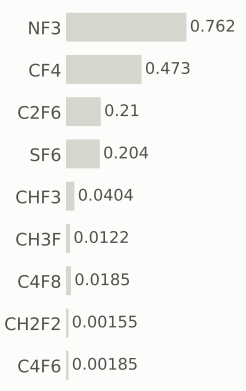


Step #2210: RIE


etch_anisotropic · RIE

1.04	174.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

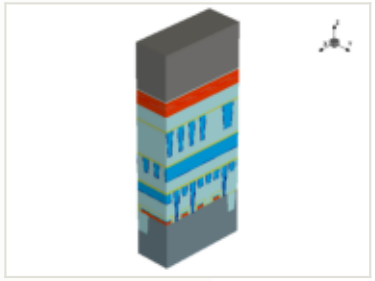




this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

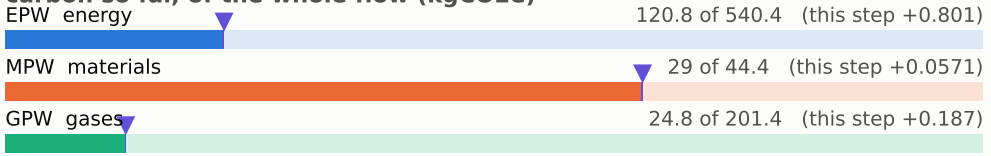


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

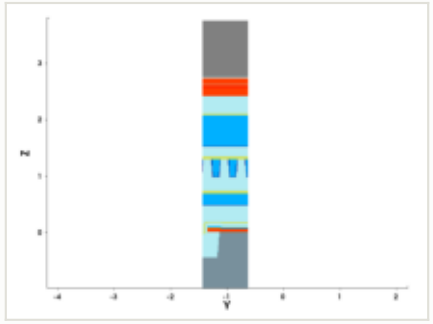


y cut at -1.035 µm

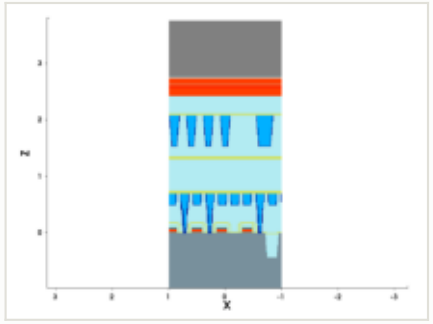


mask for this step

no mask for this step


steps by process area

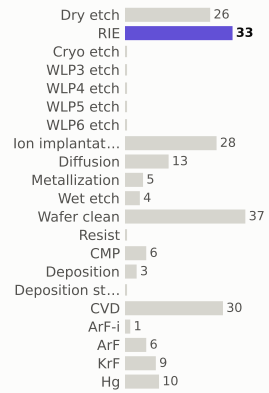

materials deposited (g)

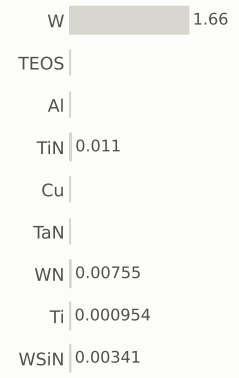

gases emitted (g)

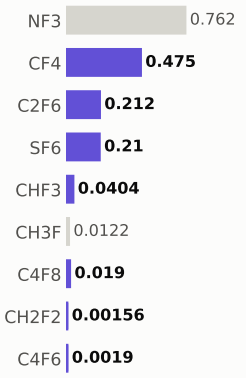


Step #2220: RIE

etch_anisotropic · RIE

1.04	175.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

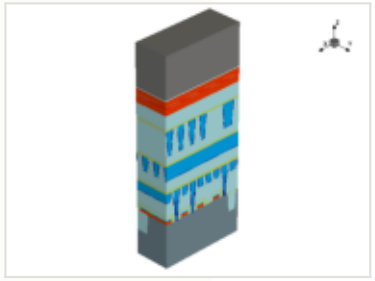






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

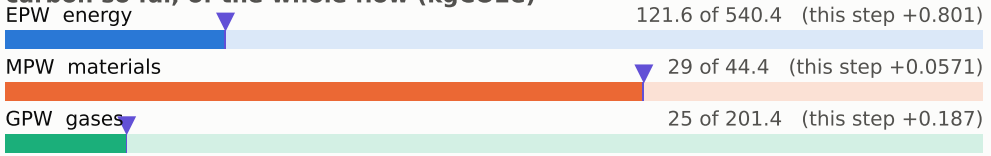


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

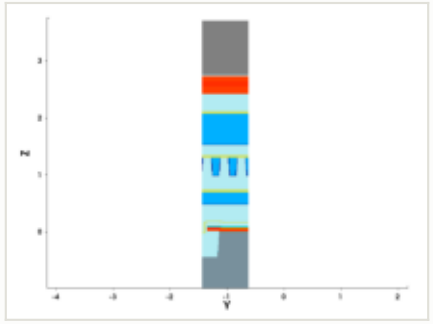


y cut at -1.035 µm

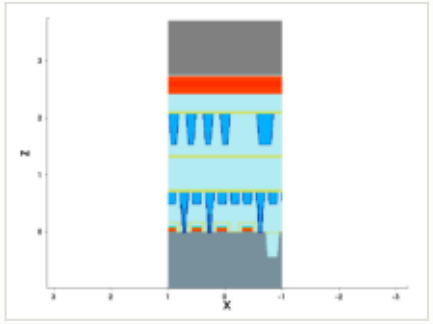


mask for this step

no mask for this step


steps by process area

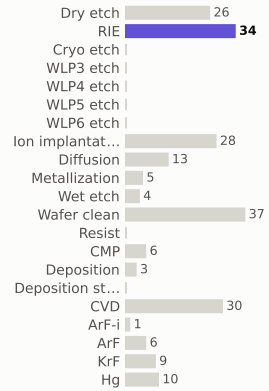

materials deposited (g)

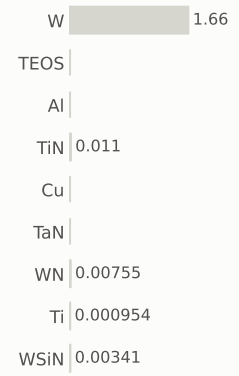

gases emitted (g)

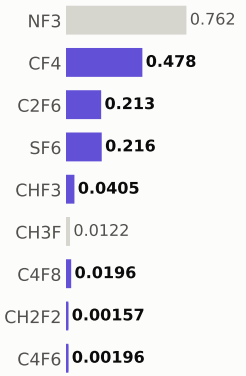


Step #2230: Dry_etch

etch_strip · Dry_etch

0.801	176.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

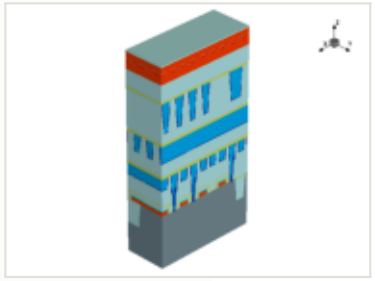






x cut at 0.000 µm

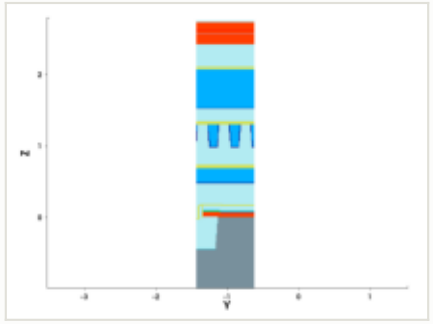

y cut at -1.035 µm

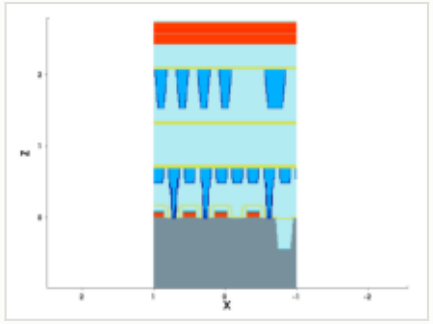

mask for this step


no mask for this step

this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

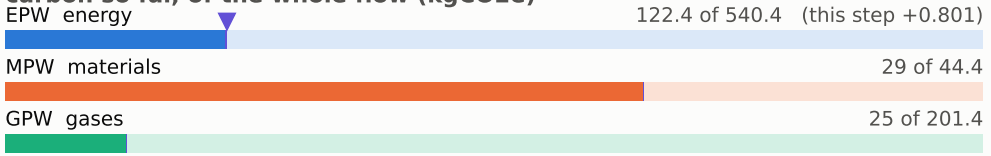


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

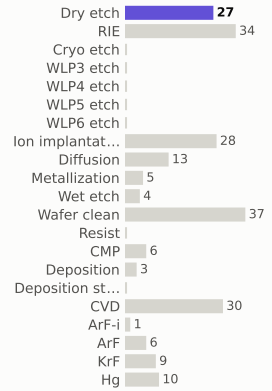

materials deposited (g)

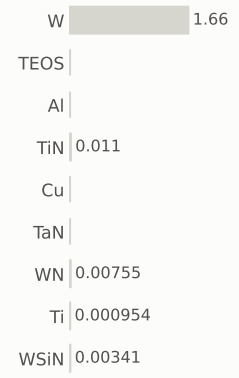

gases emitted (g)

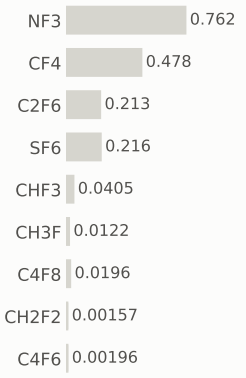


Step #2240: Wafer_clean

clean · Wafer_clean

0.169	176.6	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

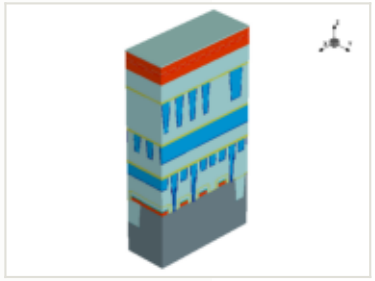






this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

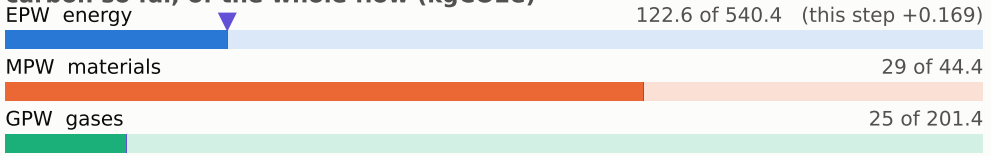


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

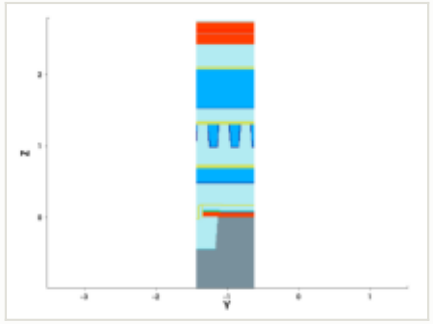


y cut at -1.035 µm

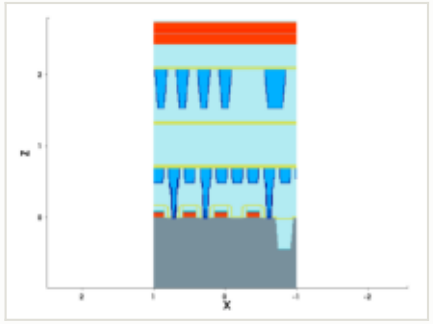

mask for this step

no mask for this step


steps by process area

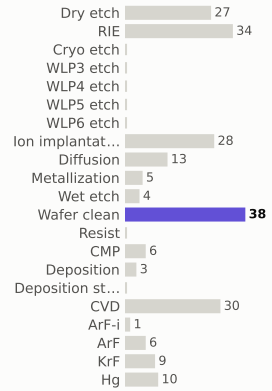

materials deposited (g)



gases emitted (g)

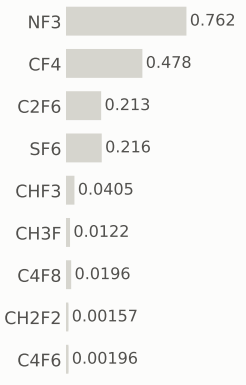


Step #2250: CVD

depo_isotropic · CVD

1.31	177.9	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

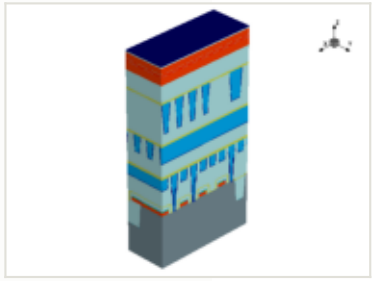






this step

process area	CVD
material	TiN
thickness	0.015 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.032 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

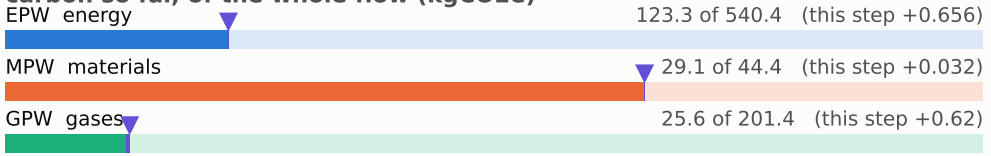


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

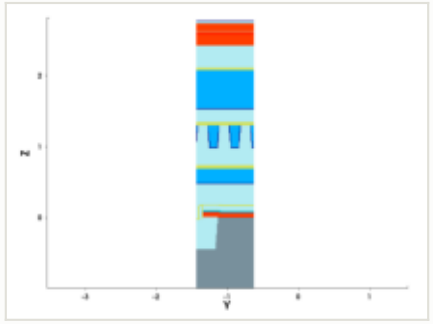


y cut at -1.035 µm

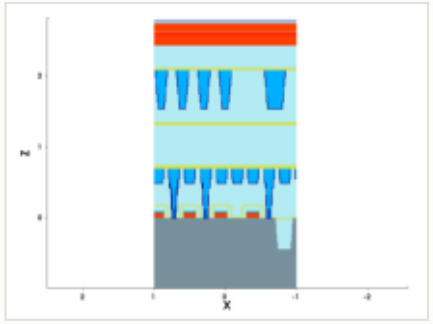

mask for this step

no mask for this step


steps by process area

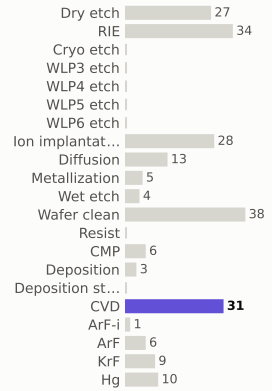

materials deposited (g)



gases emitted (g)

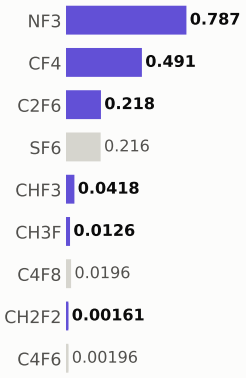


Step #2260: Metallization

depo_isotropic · Metallization

1.24	179.2	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

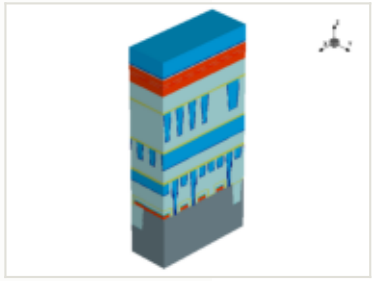






x cut at 0.000 µm

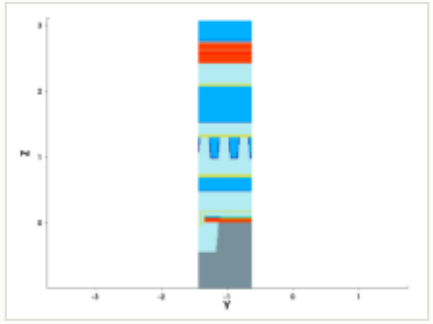

y cut at -1.035 µm

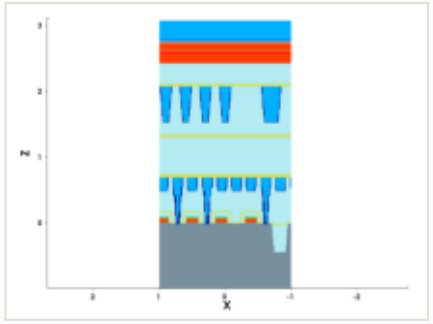

mask for this step


no mask for this step

this step

process area	Metallization
material	W
thickness	0.3 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.031 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.24 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

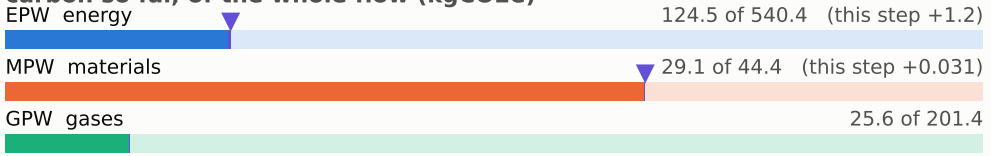

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

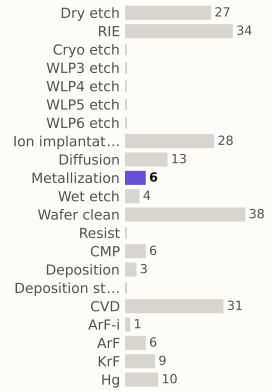

materials deposited (g)



gases emitted (g)

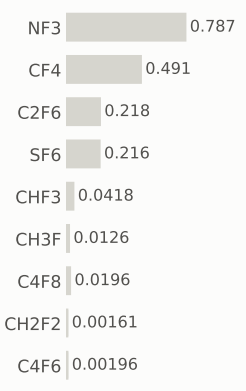


Step #2270: CMP

etch_cmp · CMP

0.169	179.3	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

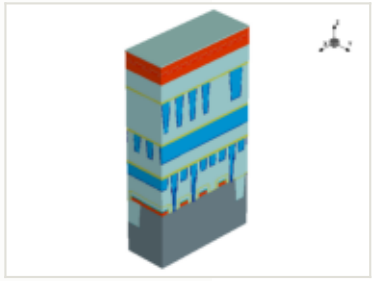






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

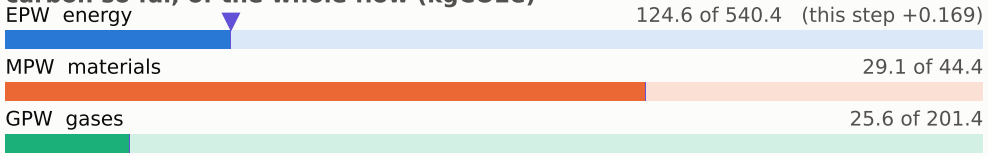


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

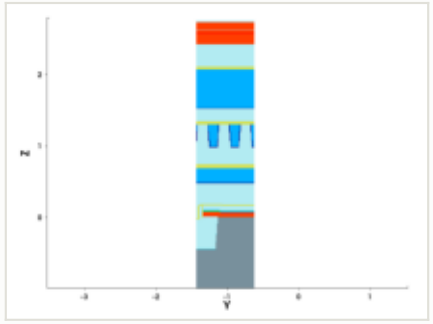


y cut at -1.035 µm

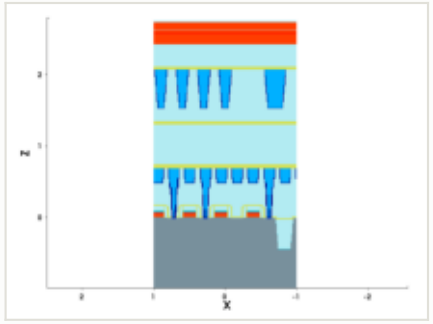


mask for this step

no mask for this step


steps by process area

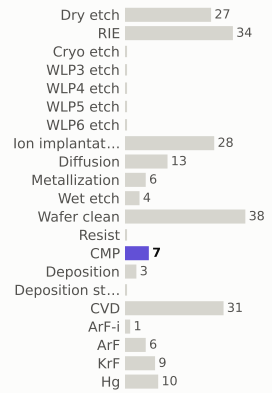

materials deposited (g)

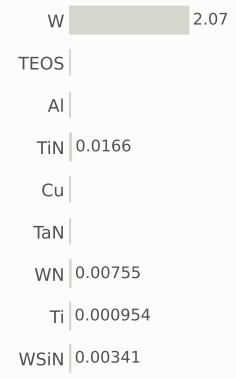

gases emitted (g)

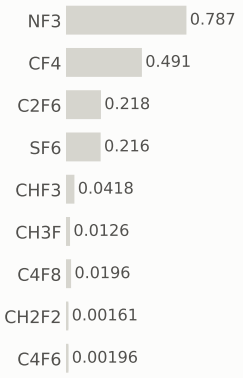


Step #2280: Wafer_clean

clean · Wafer_clean

0.169	179.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

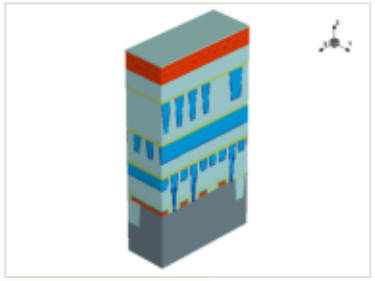






this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

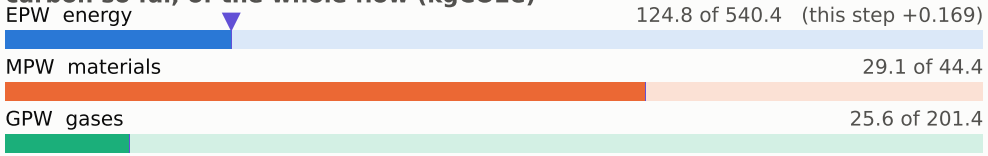


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

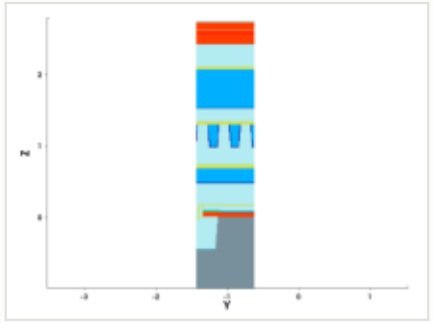


y cut at -1.035 µm

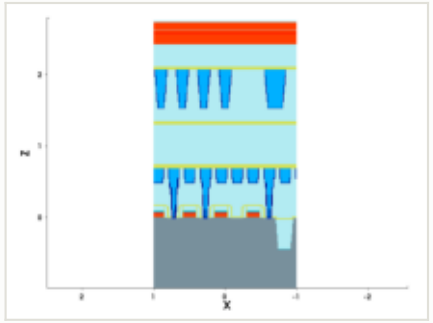

mask for this step

no mask for this step


steps by process area

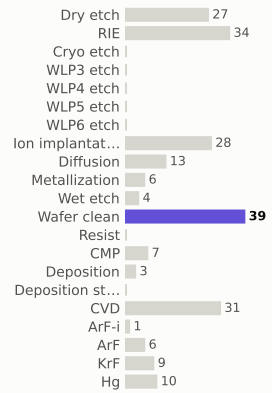

materials deposited (g)



gases emitted (g)

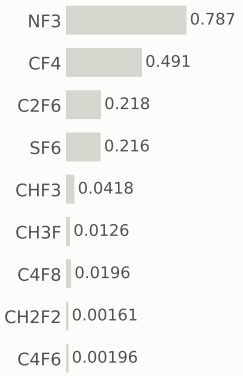


Step #2290: CVD

depo_isotropic · CVD

1.31	180.8	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

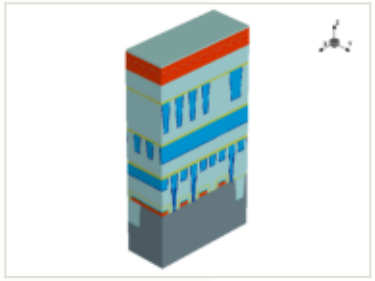






this step

process area	CVD
material	—
thickness	0.007 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

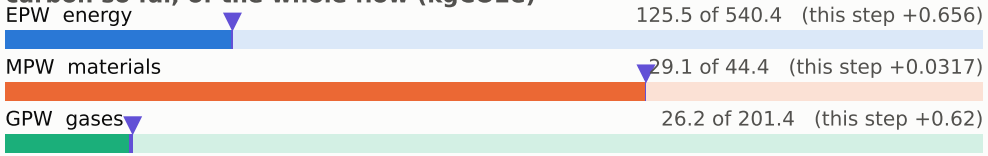


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

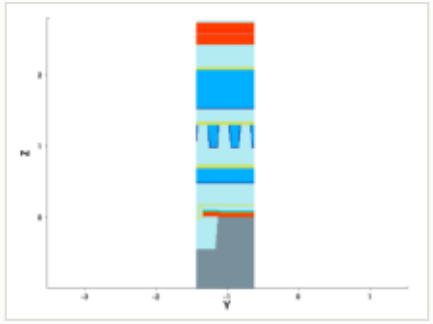


y cut at -1.035 µm

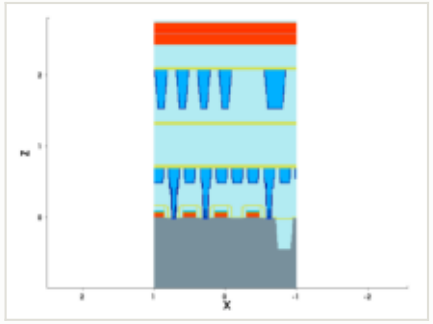

mask for this step

no mask for this step


steps by process area

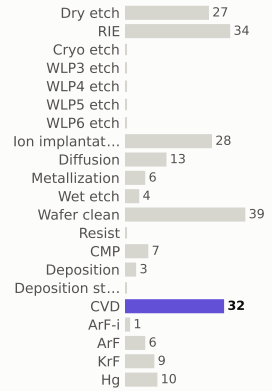

materials deposited (g)



gases emitted (g)

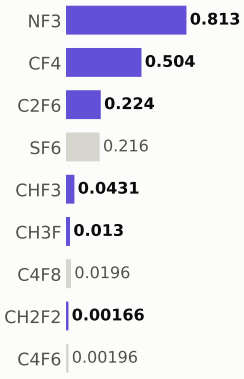


Step #2310: Wafer_clean

clean · Wafer_clean

0.169	181.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

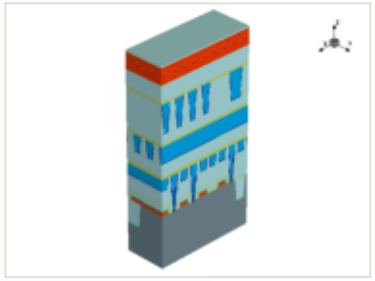




this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

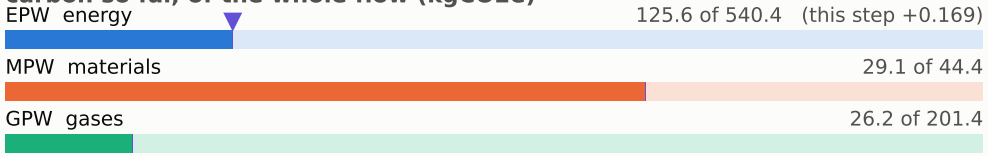


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

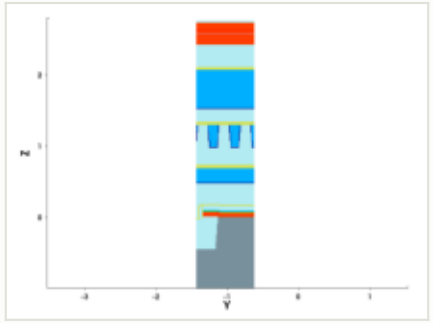


y cut at -1.035 µm

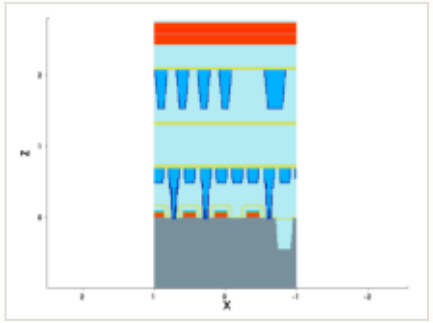

mask for this step

no mask for this step


steps by process area

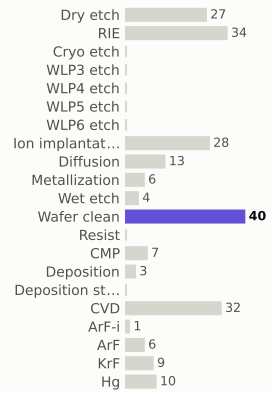

materials deposited (g)



gases emitted (g)

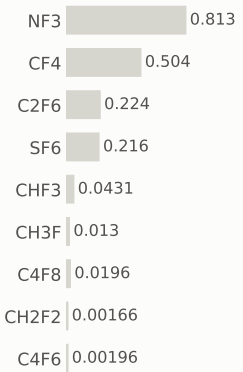


Step #2320: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	181.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

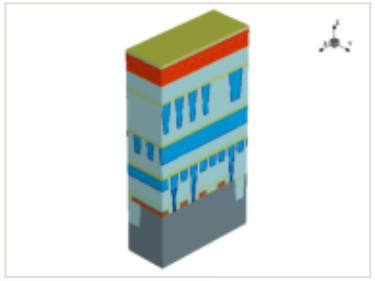






x cut at 0.000 µm

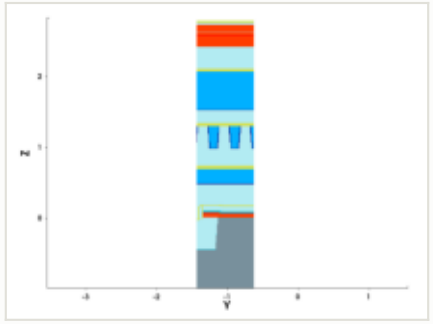

y cut at -1.035 µm

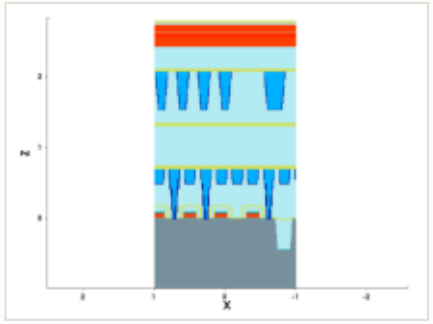


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

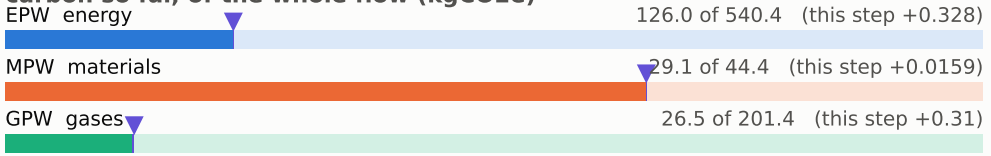


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

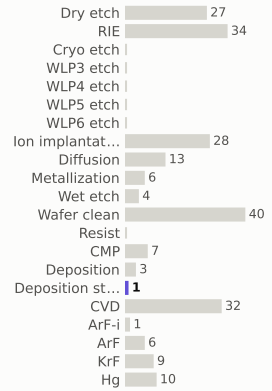

materials deposited (g)



gases emitted (g)

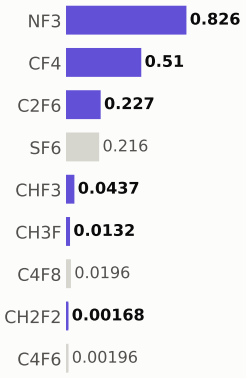


Step #2330: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	182.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

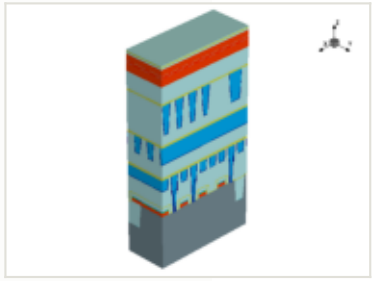






x cut at 0.000 µm

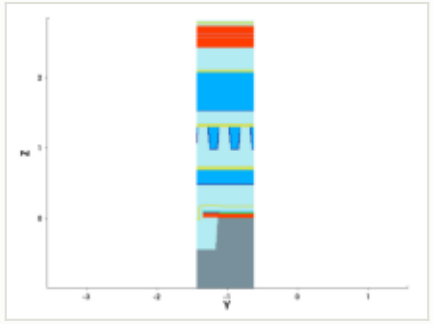

y cut at -1.035 µm

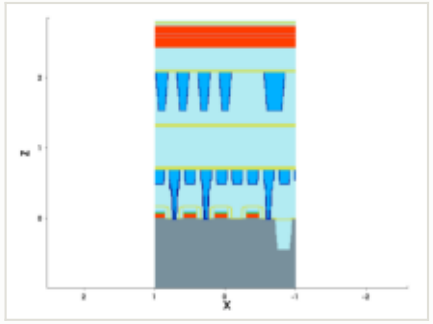


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

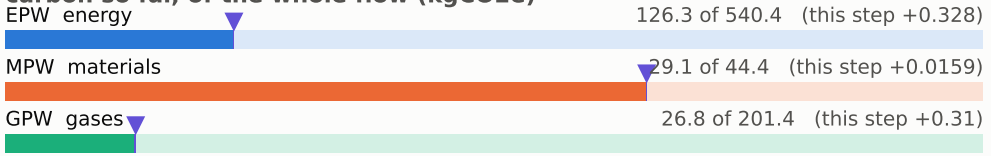


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

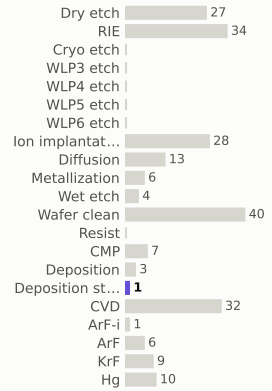

materials deposited (g)

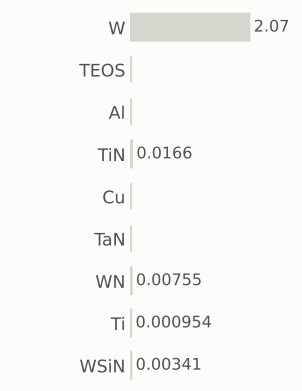

gases emitted (g)

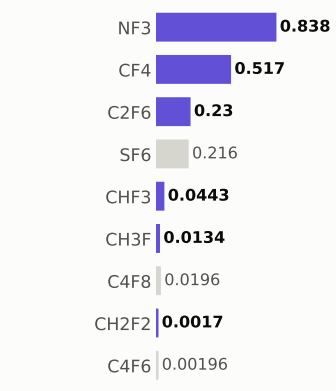


Step #2340: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	182.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

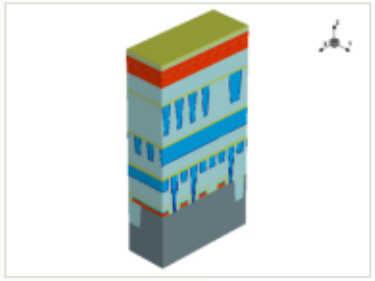






x cut at 0.000 µm

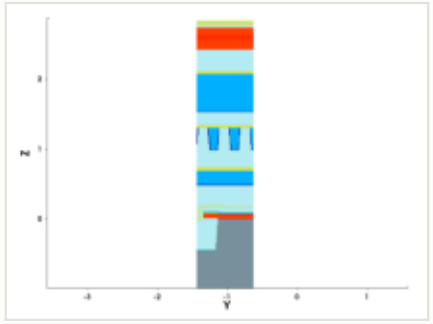

y cut at -1.035 µm

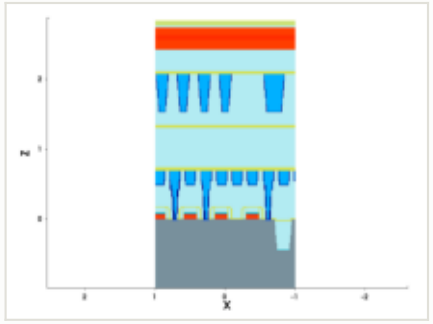


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

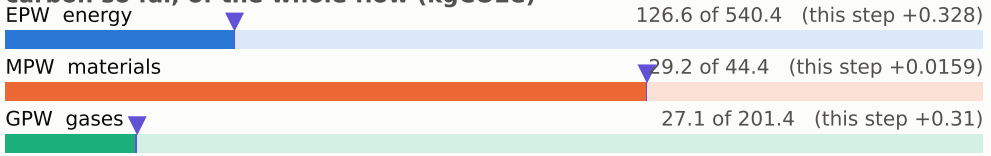

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

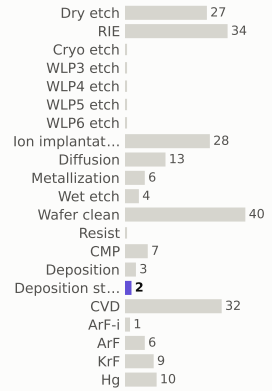

materials deposited (g)



gases emitted (g)

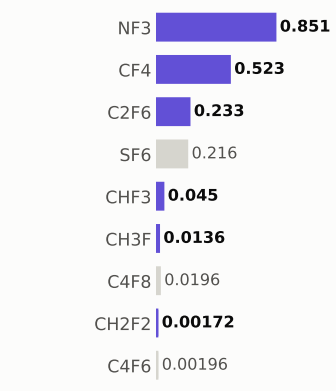


Step #2350: Deposition_stack

depo_anisotropic · Deposition_stack


0.654	183.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

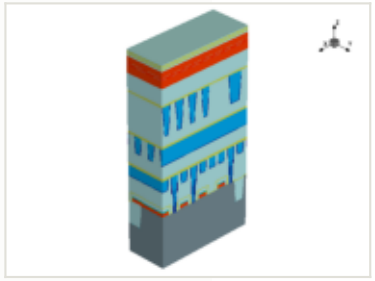






x cut at 0.000 µm

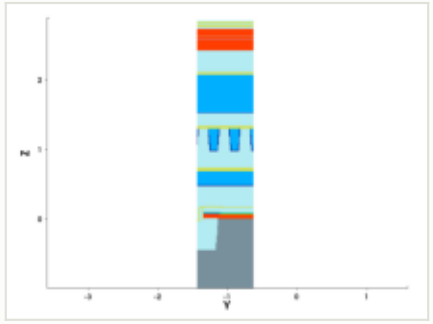

y cut at -1.035 µm

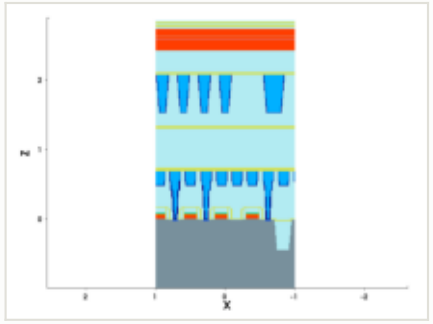


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

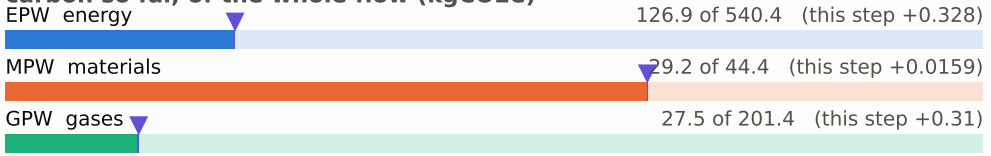


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

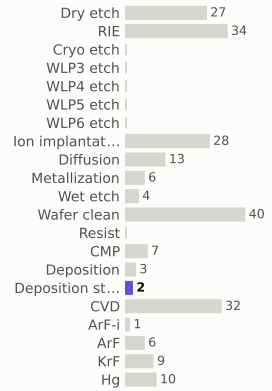

materials deposited (g)

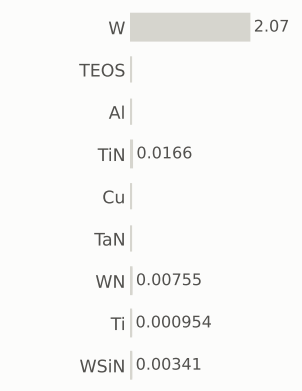

gases emitted (g)

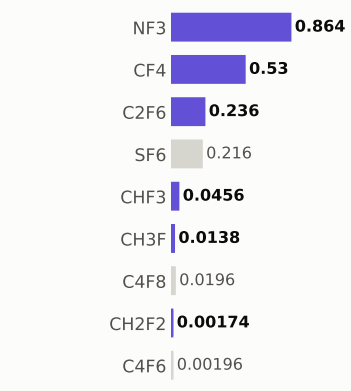


Step #2360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	184.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

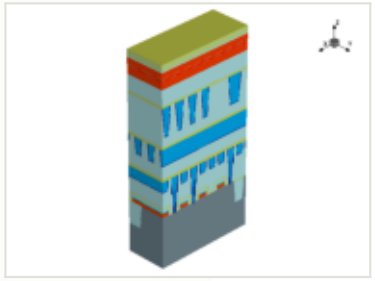






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

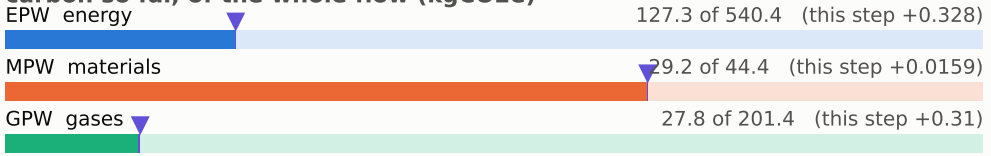


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

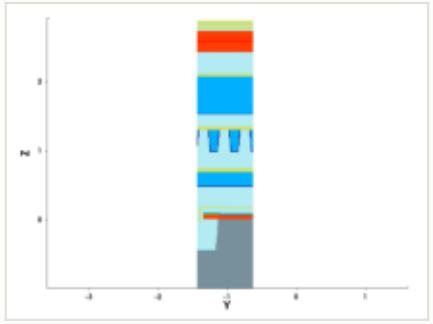


y cut at -1.035 µm

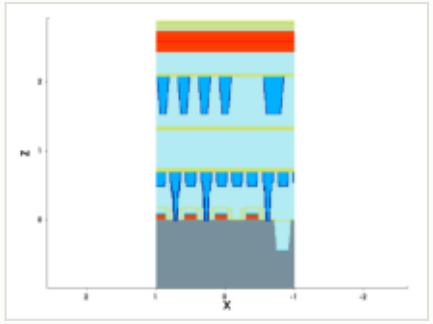

mask for this step

no mask for this step


steps by process area

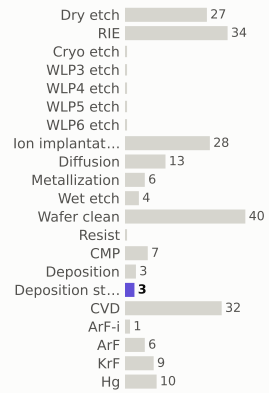

materials deposited (g)



gases emitted (g)

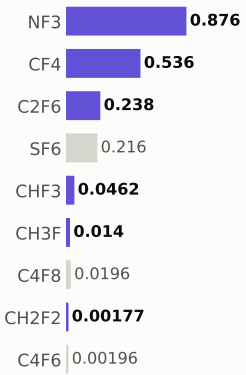


Step #2370: Deposition_stack

depo_anisotropic · Deposition_stack


0.654	184.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

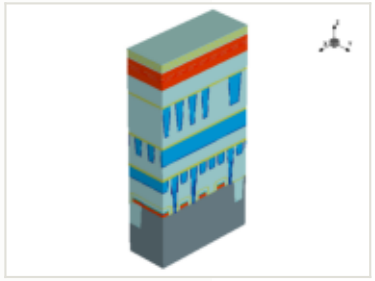






x cut at 0.000 µm

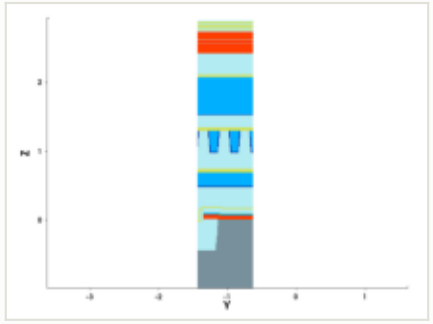

y cut at -1.035 µm

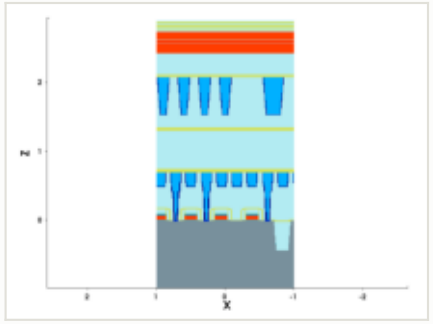


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

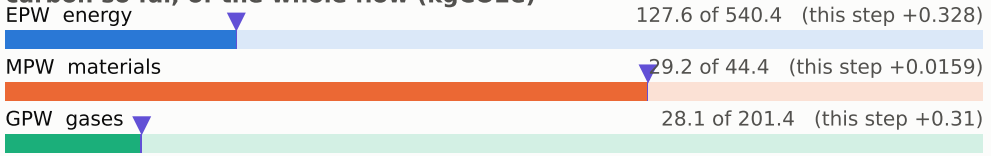


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

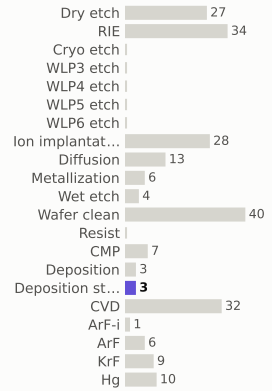

materials deposited (g)

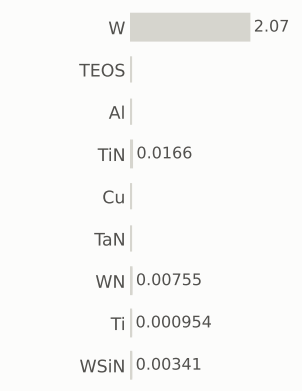

gases emitted (g)

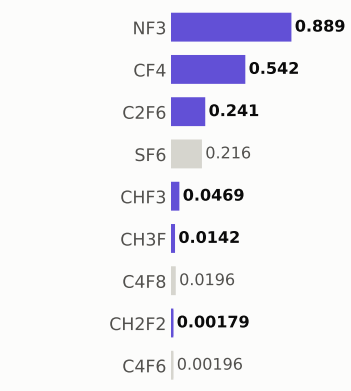


Step #2380: Deposition_stack

depo_anisotropic · Deposition_stack


0.654	185.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

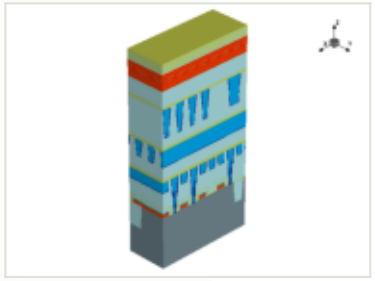






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

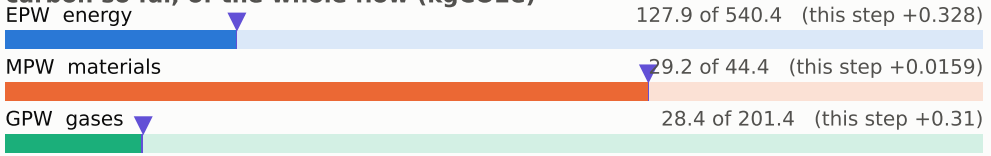


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

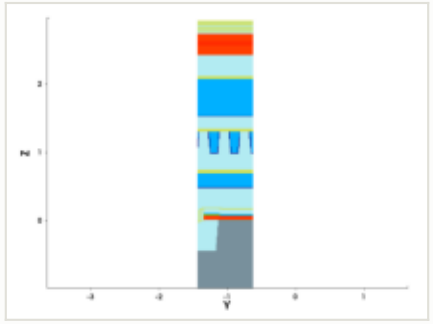


y cut at -1.035 µm

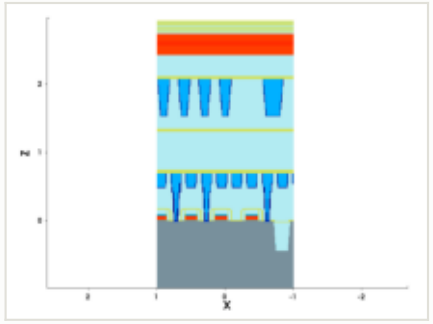


mask for this step

no mask for this step


steps by process area

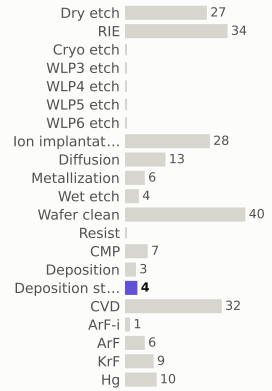

materials deposited (g)

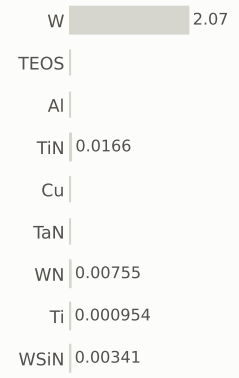

gases emitted (g)




Step #2390: Deposition_stack

depo_anisotropic · Deposition_stack


0.654	186.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

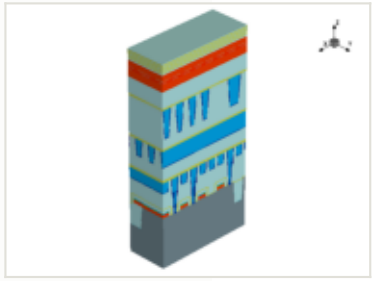






x cut at 0.000 µm

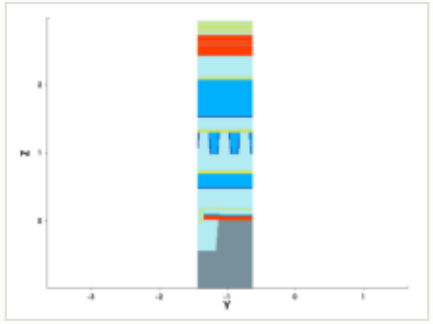

y cut at -1.035 µm

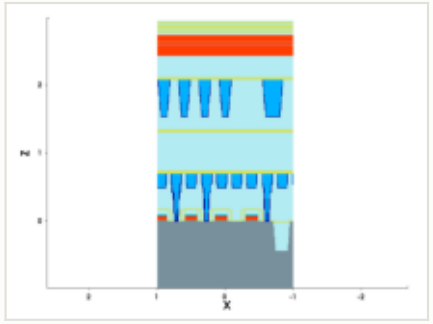


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

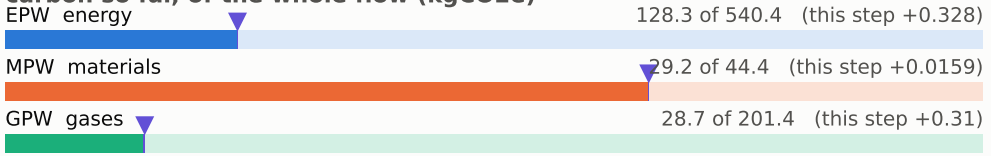


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

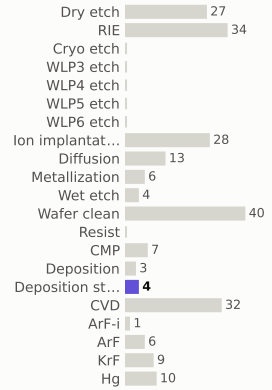

materials deposited (g)

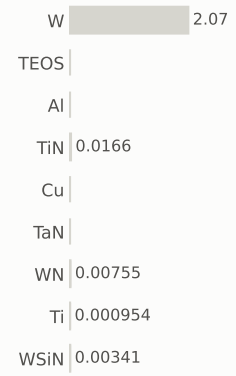

gases emitted (g)

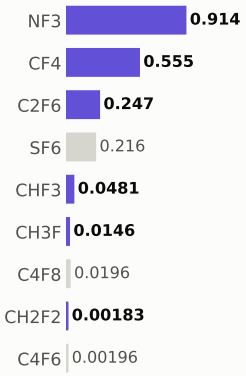


Step #2400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	186.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

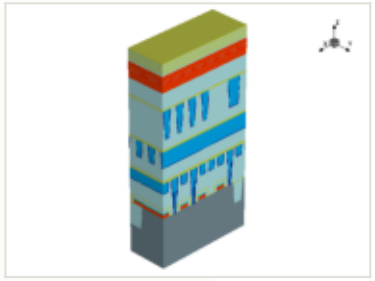






x cut at 0.000 µm

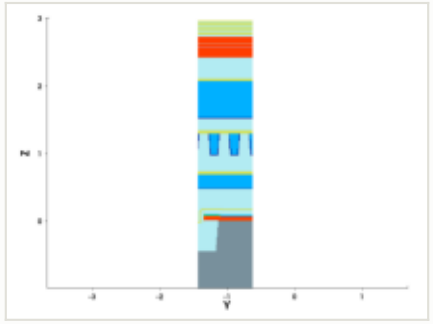

y cut at -1.035 µm

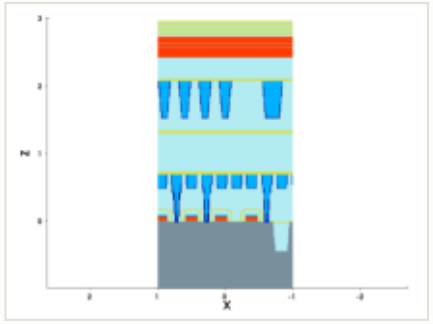


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

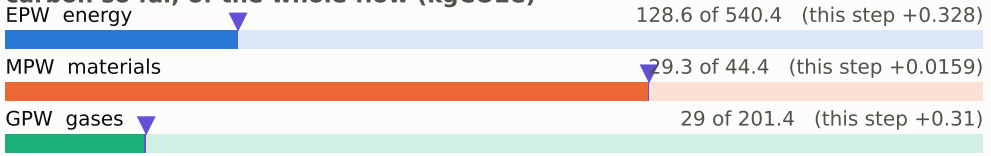


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

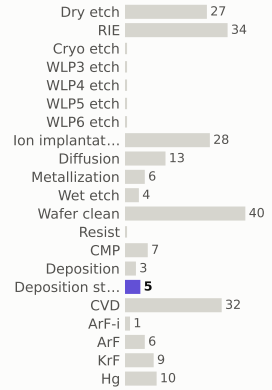

materials deposited (g)

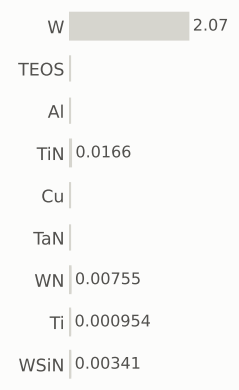

gases emitted (g)




Step #2410: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	187.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

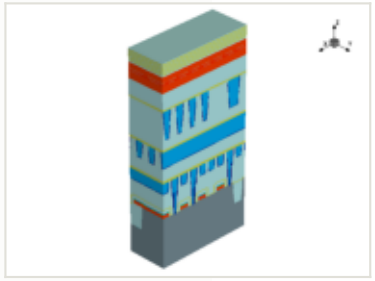




x cut at 0.000 µm

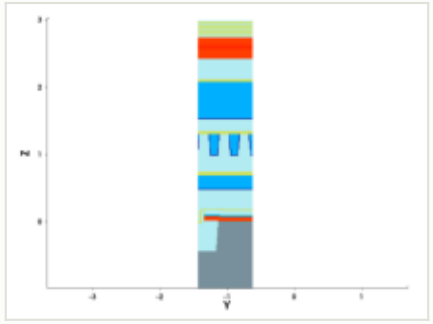

y cut at -1.035 µm

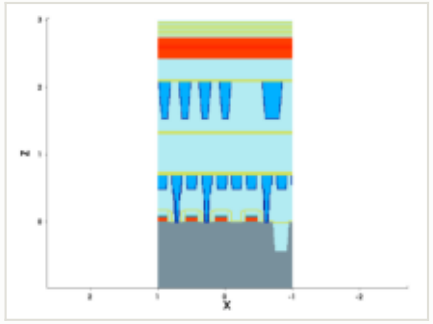


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

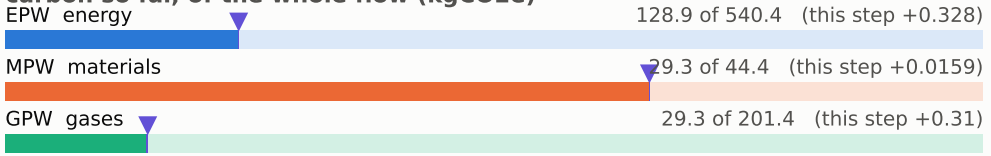


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

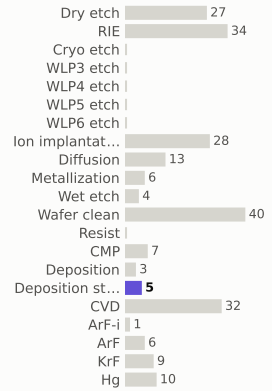

materials deposited (g)

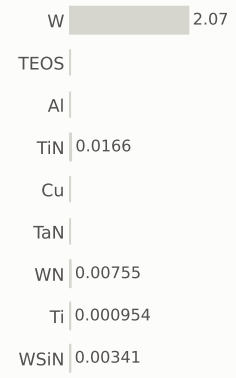

gases emitted (g)

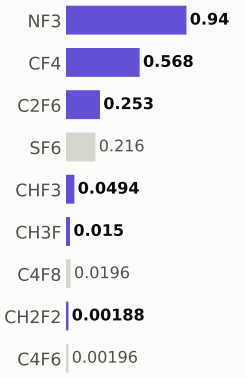


Step #2420: Deposition_stack

depo_anisotropic · Deposition_stack


0.654	188.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

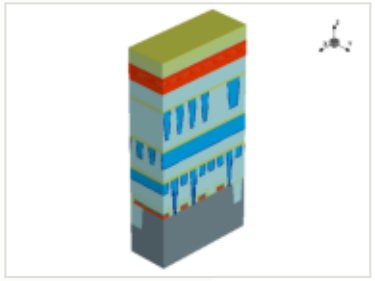






x cut at 0.000 µm

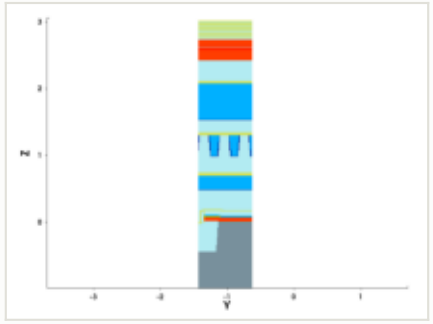

y cut at -1.035 µm

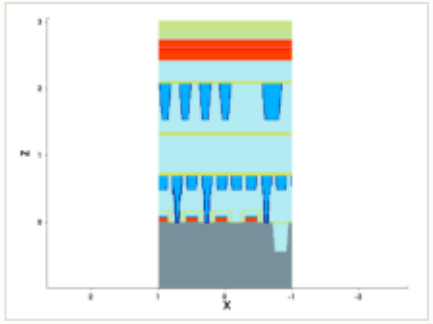

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 129.2 of 540.4 (this step +0.328)


MPW materials — 29.3 of 44.4 (this step +0.0159)

GPW gases — 29.6 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)




steps by process area



materials deposited (g)

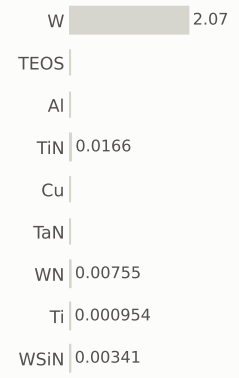

gases emitted (g)




Step #2430: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	188.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

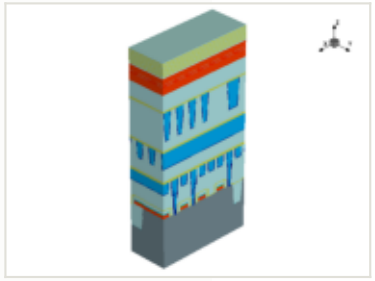






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

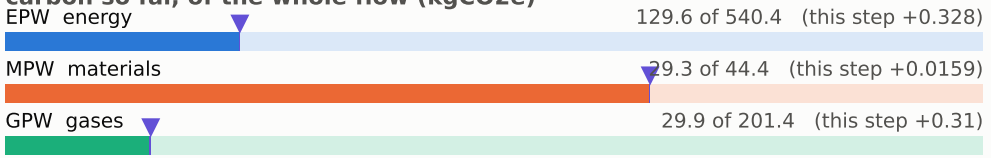


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

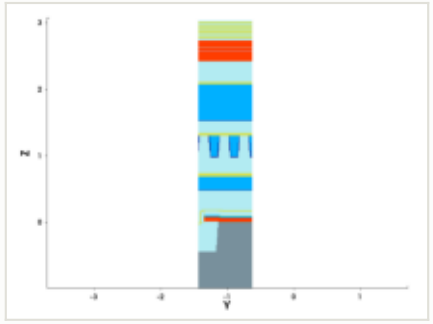


y cut at -1.035 µm

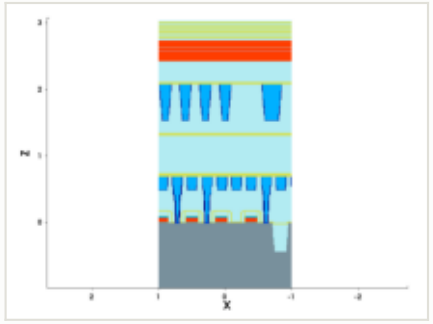


mask for this step

no mask for this step


steps by process area

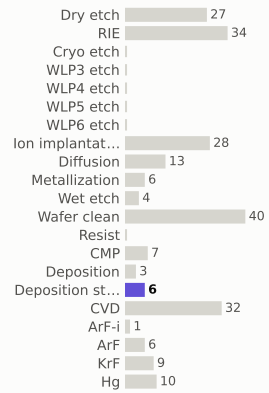

materials deposited (g)

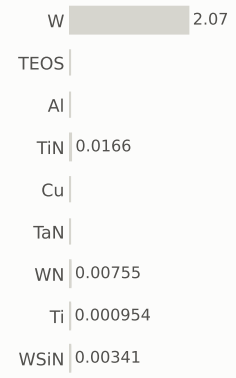

gases emitted (g)




Step #2440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	189.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

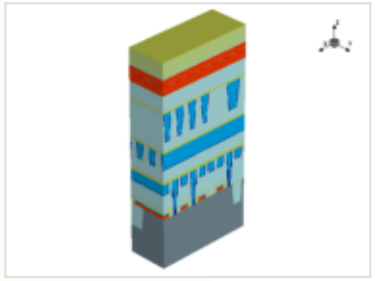






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

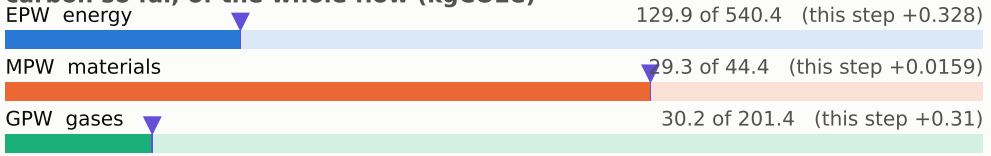


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

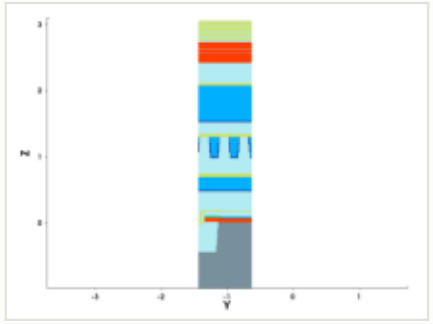


y cut at -1.035 µm

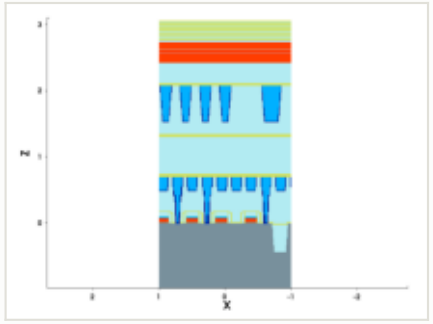


mask for this step

no mask for this step


steps by process area

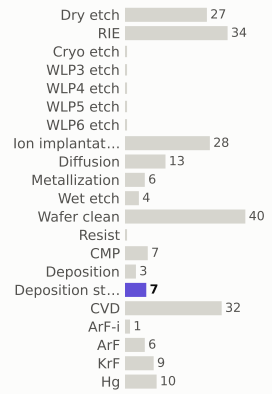

materials deposited (g)

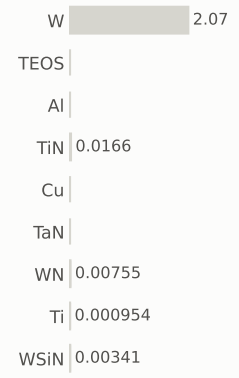

gases emitted (g)




Step #2450: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	190.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

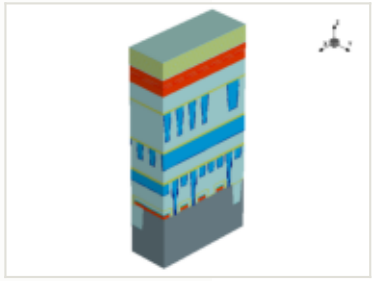






x cut at 0.000 µm

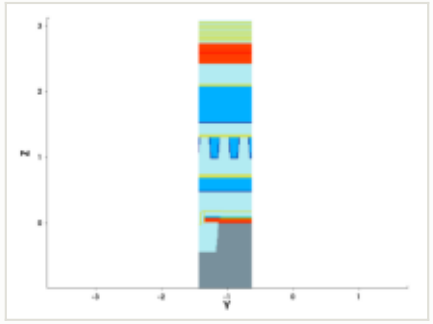

y cut at -1.035 µm

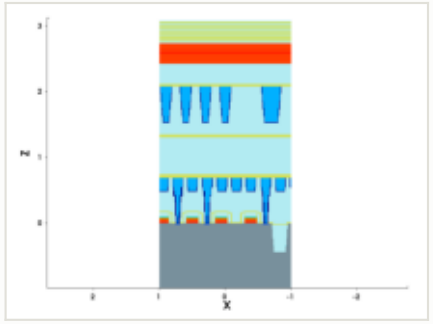


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

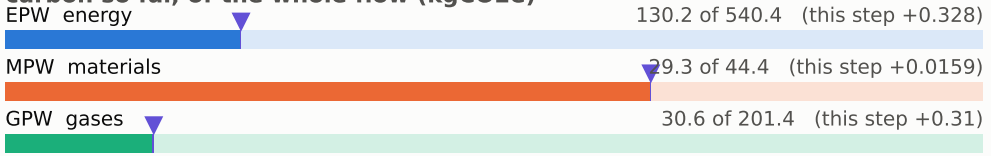


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

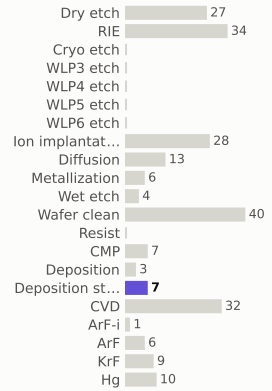

materials deposited (g)

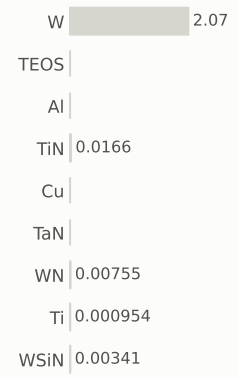

gases emitted (g)




Step #2460: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	190.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

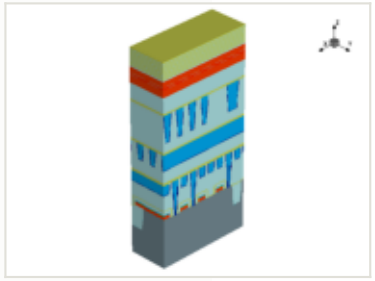






this step


process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

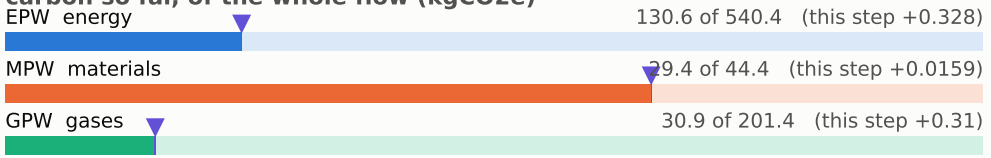


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

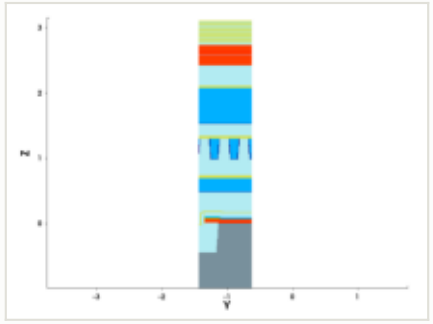


y cut at -1.035 µm

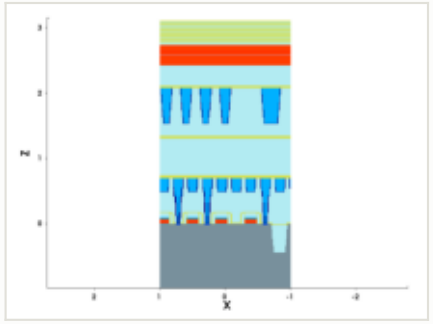


mask for this step

no mask for this step


steps by process area

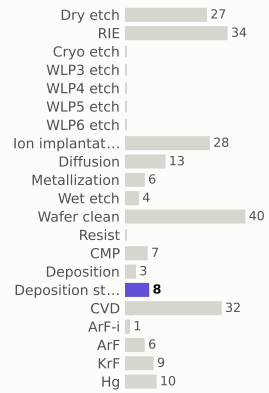

materials deposited (g)

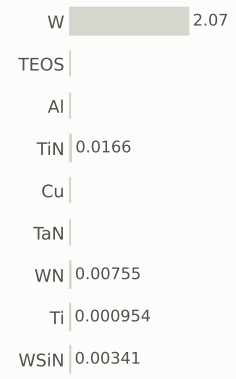

gases emitted (g)




Step #2470: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	191.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

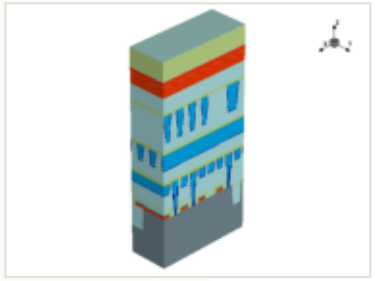






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

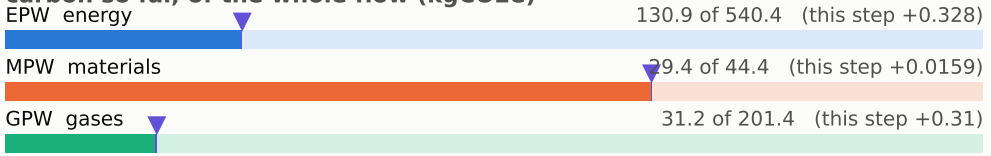


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

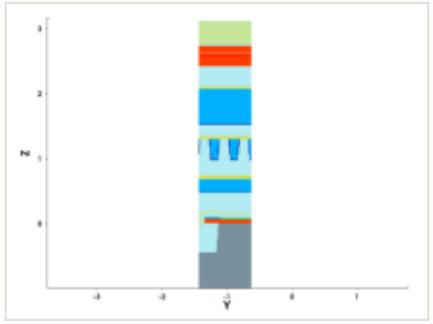


y cut at -1.035 µm

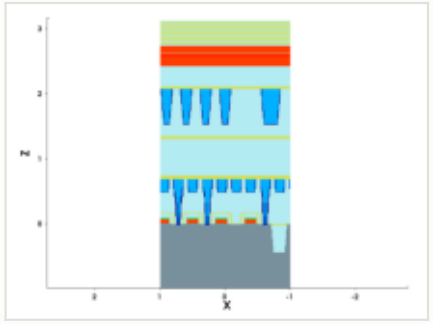

mask for this step

no mask for this step


steps by process area

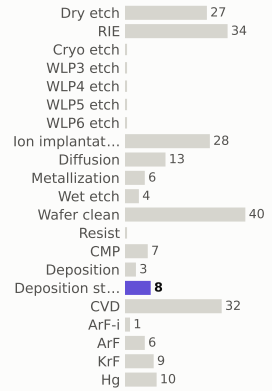

materials deposited (g)



gases emitted (g)




Step #2480: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	192.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

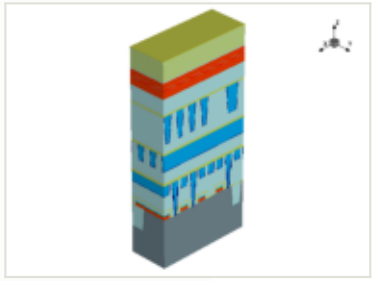






x cut at 0.000 µm

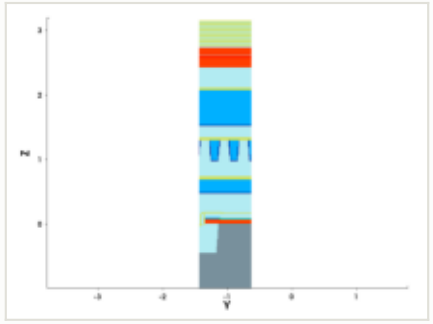

y cut at -1.035 µm

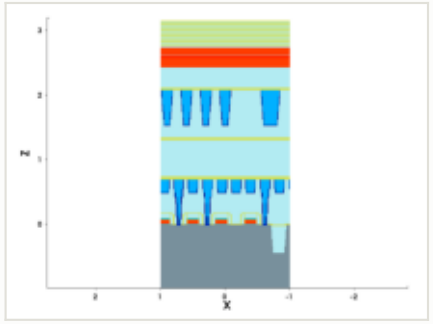


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

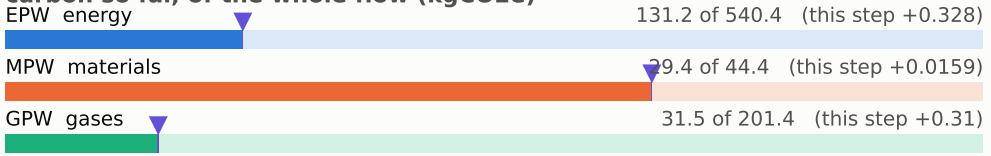

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

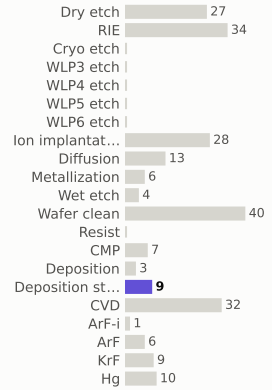

materials deposited (g)



gases emitted (g)

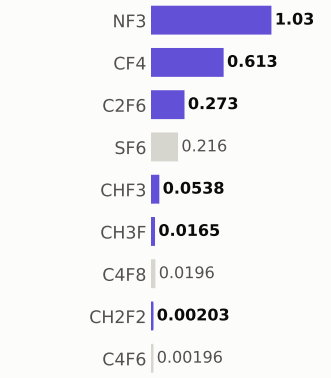


Step #2490: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	192.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

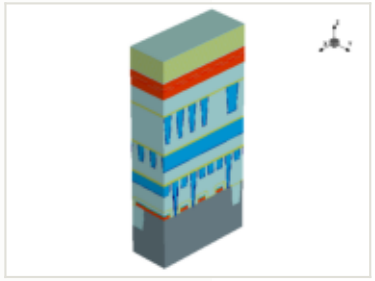






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

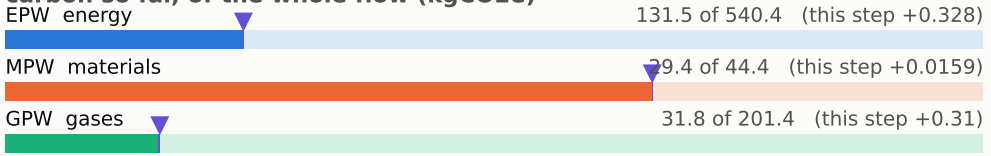


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

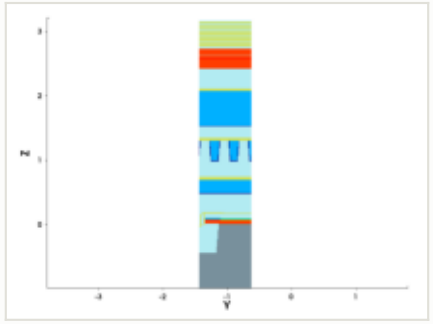


y cut at -1.035 µm

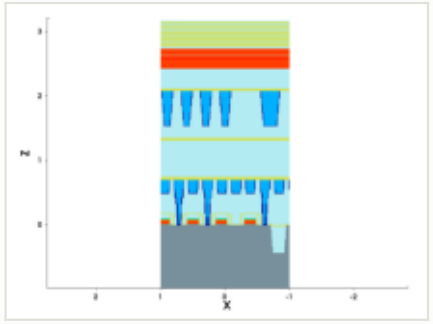


mask for this step

no mask for this step


steps by process area

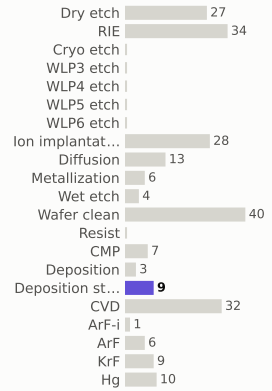

materials deposited (g)

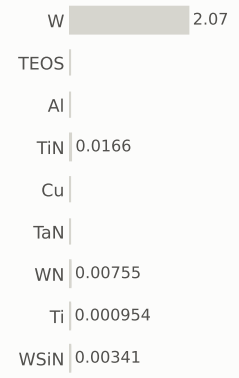

gases emitted (g)




Step #2500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	193.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

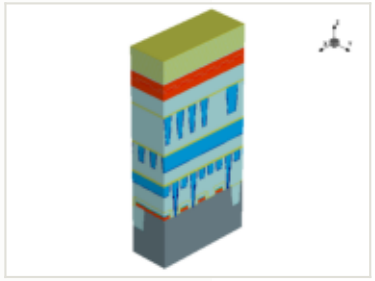






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

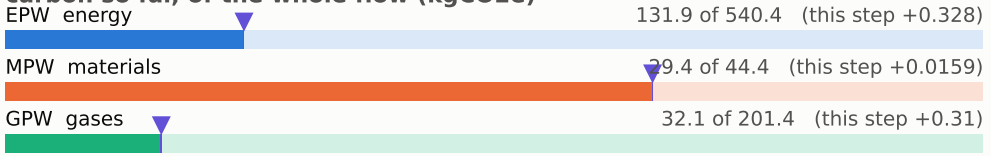


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

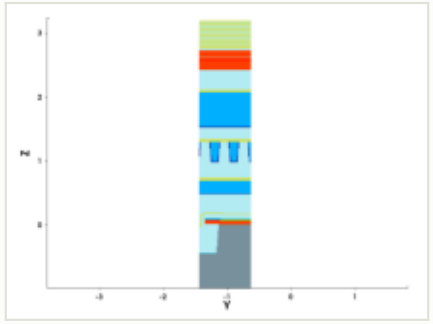


y cut at -1.035 µm

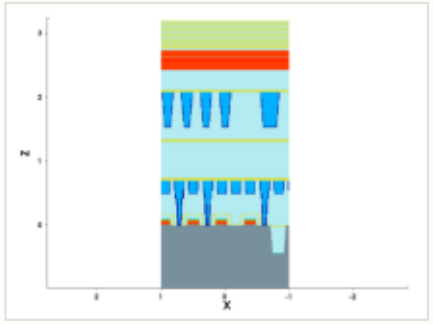


mask for this step

no mask for this step


steps by process area

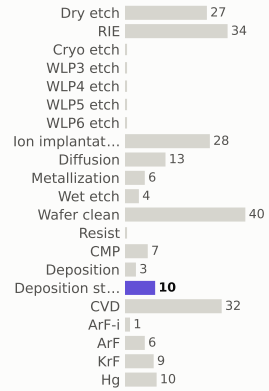

materials deposited (g)

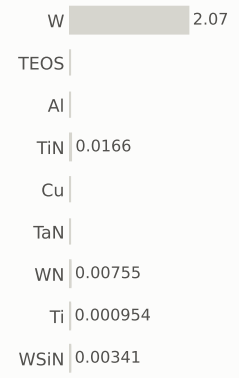

gases emitted (g)

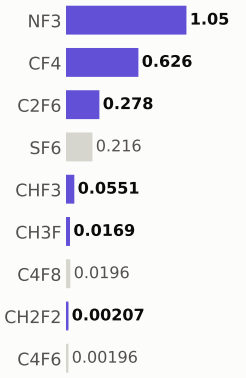


Step #2510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	194.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

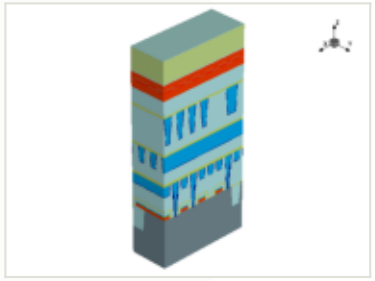






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

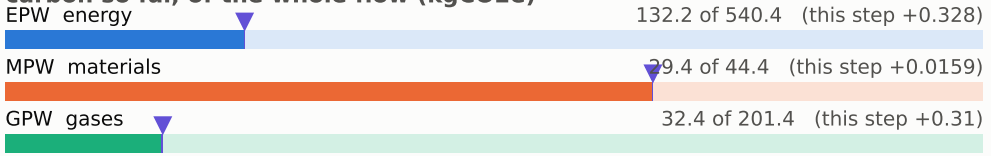


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

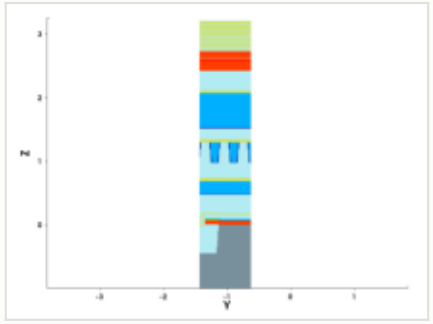


y cut at -1.035 µm

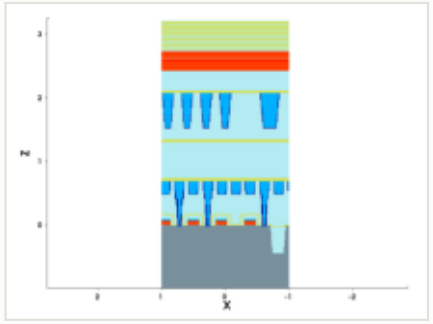


mask for this step

no mask for this step


steps by process area

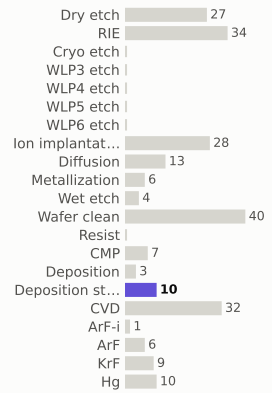

materials deposited (g)

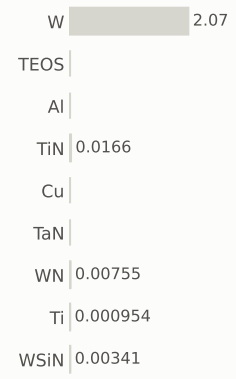

gases emitted (g)




Step #2520: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	194.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

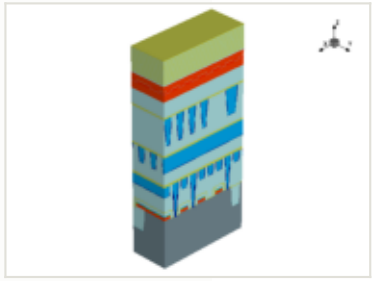






x cut at 0.000 µm

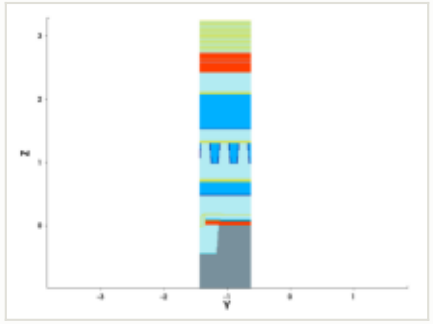

y cut at -1.035 µm

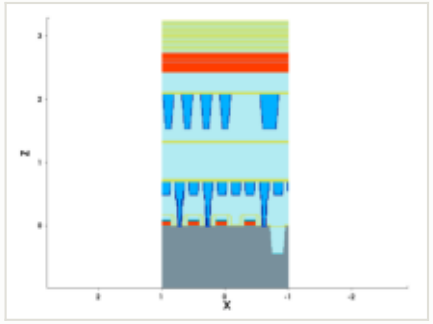


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

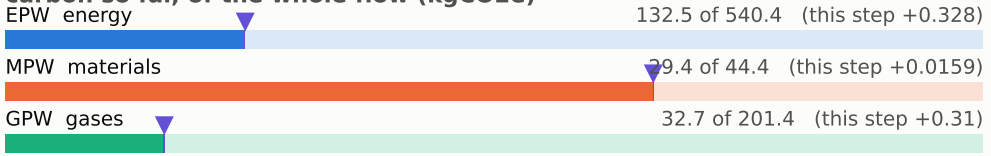


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

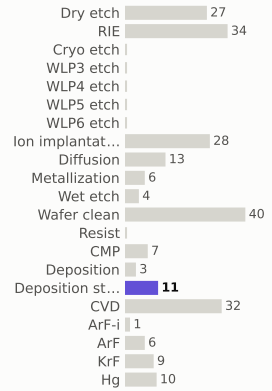

materials deposited (g)

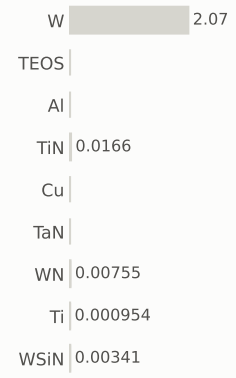

gases emitted (g)




Step #2530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	195.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

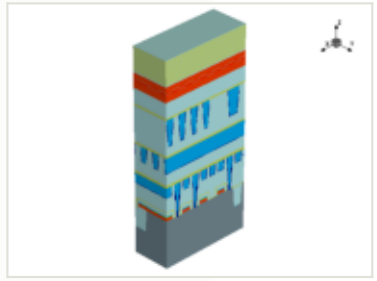






x cut at 0.000 µm

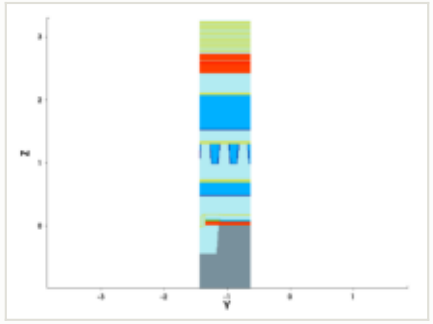

y cut at -1.035 µm

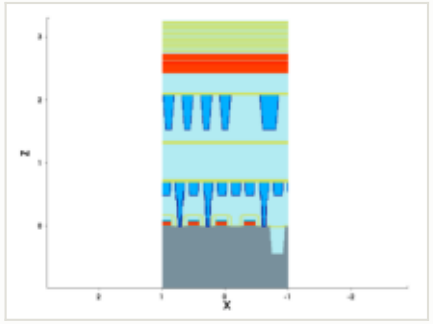


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

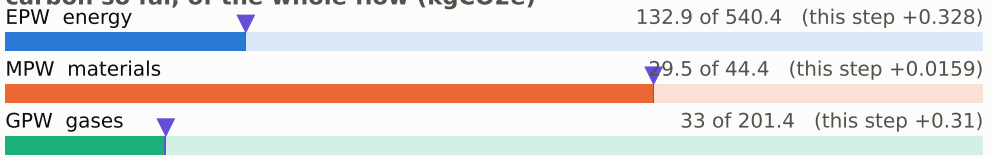

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

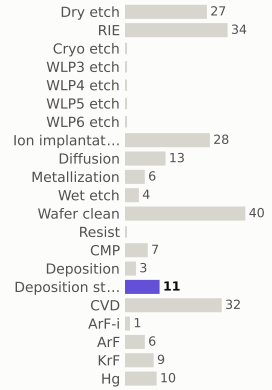

materials deposited (g)



gases emitted (g)

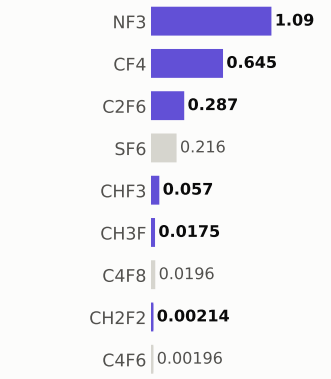


Step #2540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	196.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

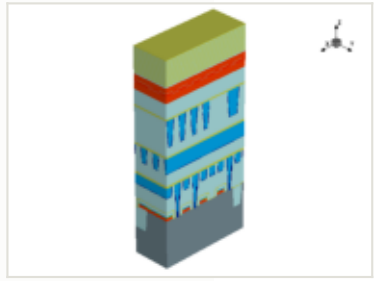






x cut at 0.000 µm

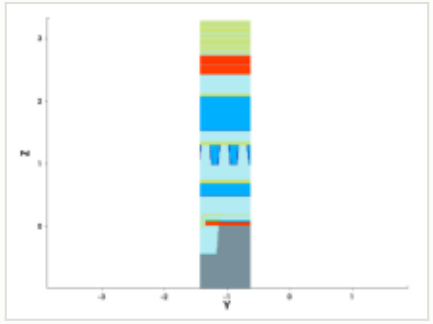

y cut at -1.035 µm

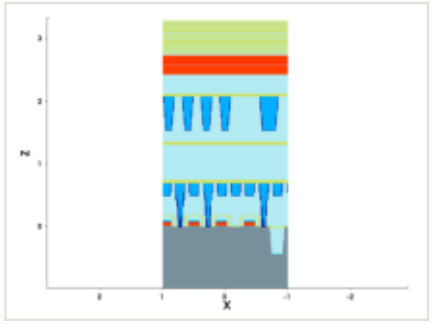


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

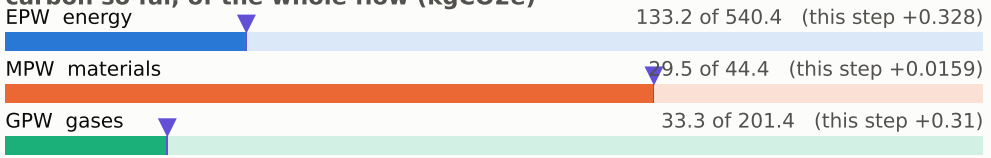

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

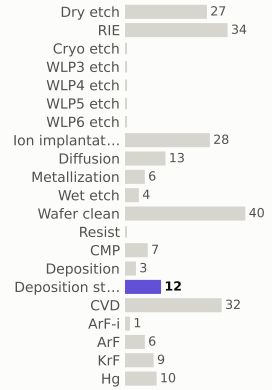

materials deposited (g)



gases emitted (g)

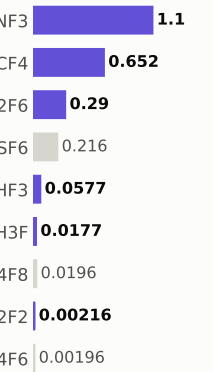


Step #2550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	196.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

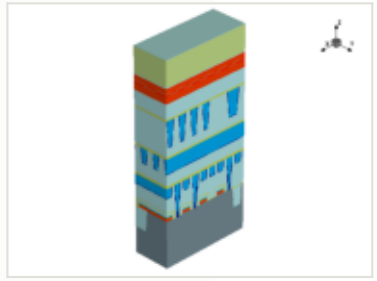




x cut at 0.000 µm

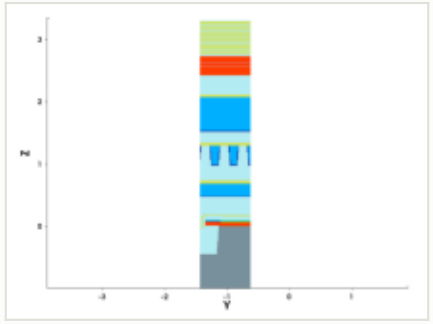

y cut at -1.035 µm

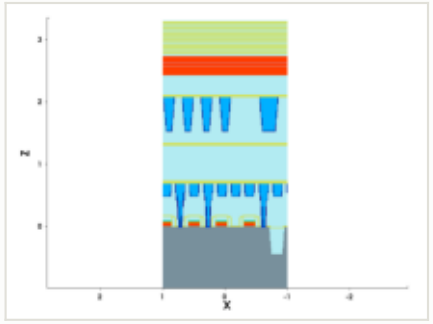

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 133.5 of 540.4 (this step +0.328)


MPW materials — 39.5 of 44.4 (this step +0.0159)

GPW gases — 33.7 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

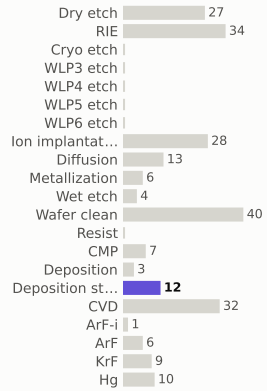

materials deposited (g)

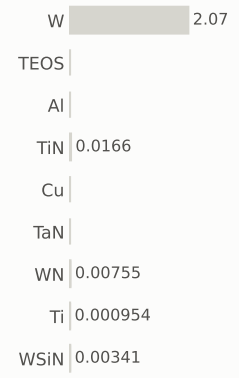

gases emitted (g)

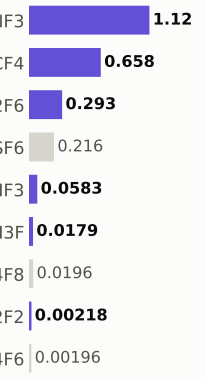


Step #2560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	197.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

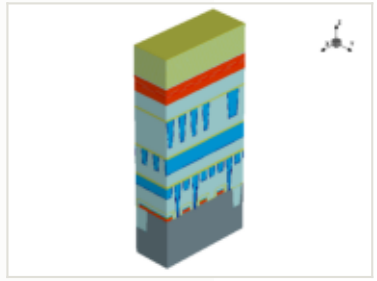






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

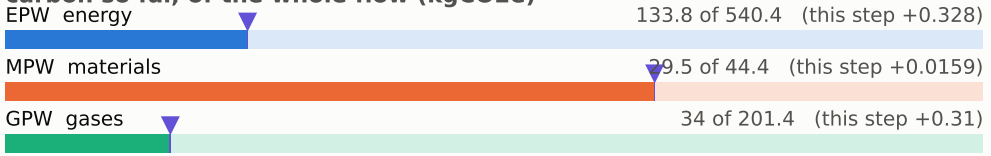


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

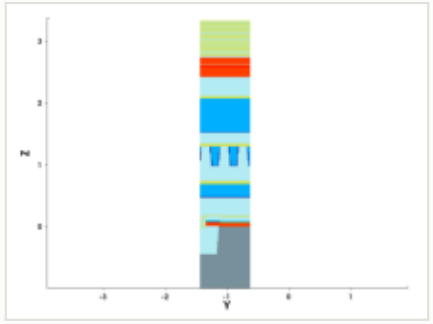


y cut at -1.035 µm

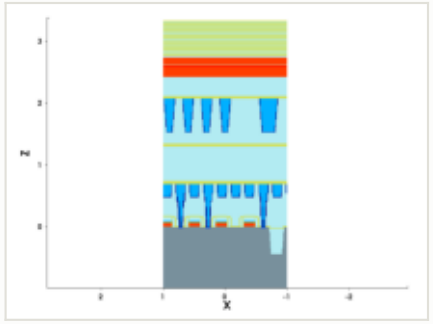

mask for this step

no mask for this step


steps by process area

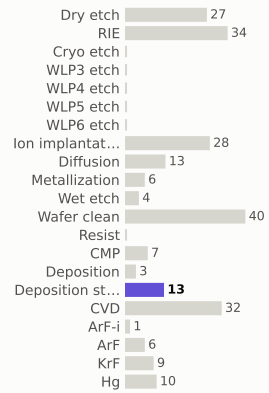

materials deposited (g)



gases emitted (g)




Step #2570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	198.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

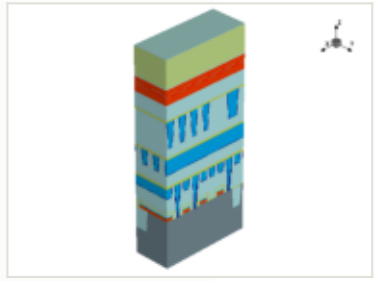






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

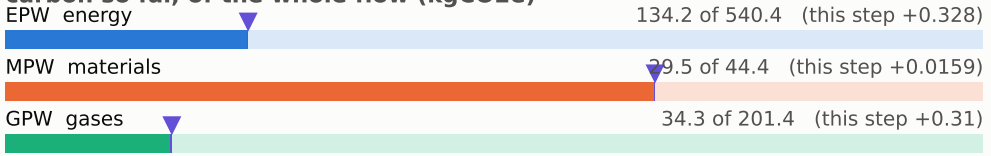


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

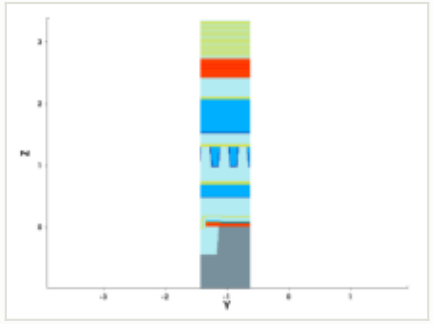


y cut at -1.035 µm

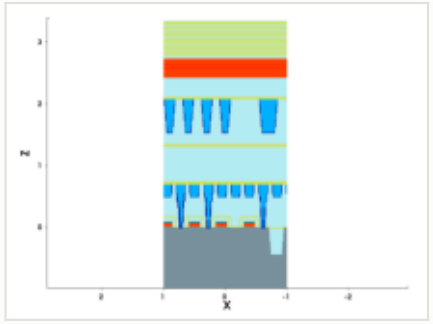


mask for this step

no mask for this step


steps by process area

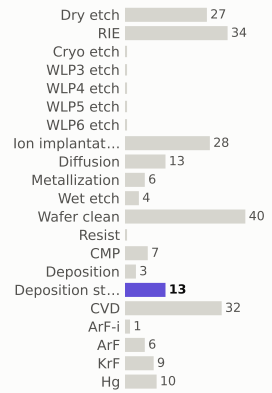

materials deposited (g)

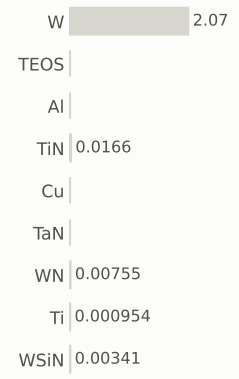

gases emitted (g)




Step #2580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	198.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

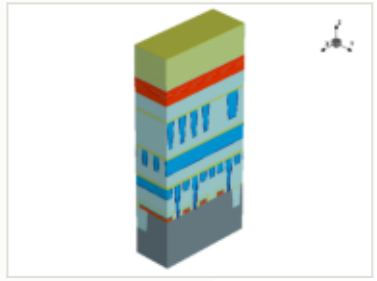






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

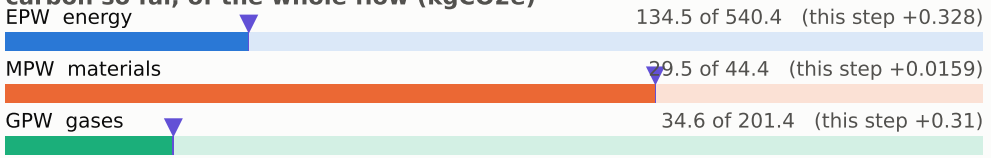


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

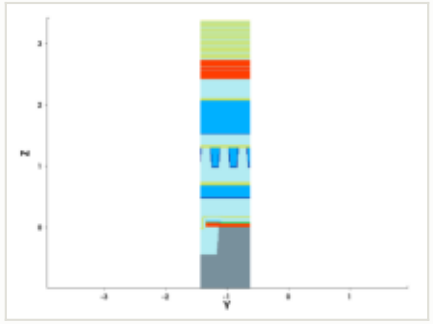


y cut at -1.035 µm

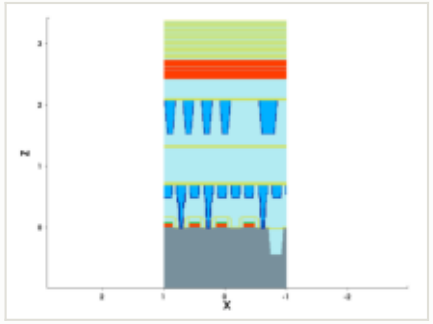

mask for this step

no mask for this step


steps by process area

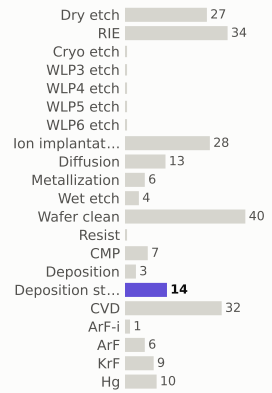

materials deposited (g)



gases emitted (g)




Step #2590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	199.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

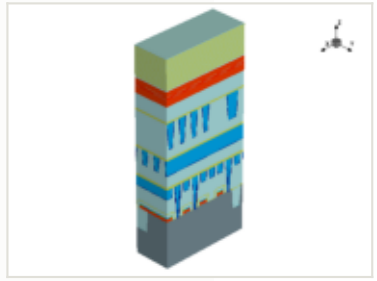




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

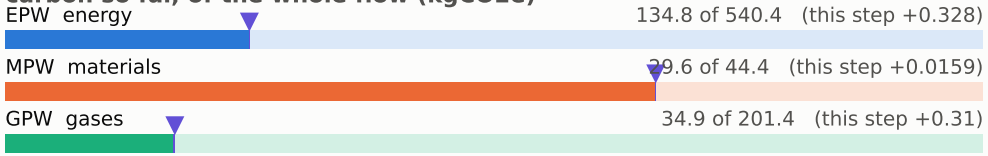


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

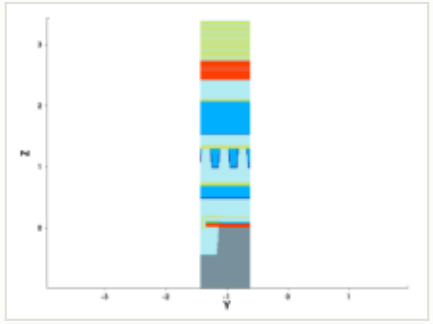


y cut at -1.035 µm

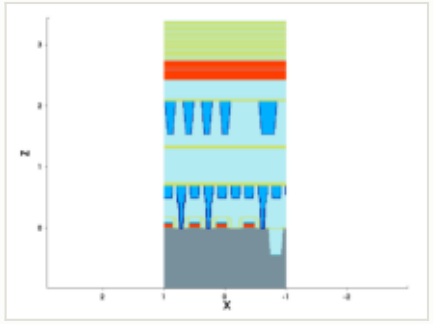


mask for this step

no mask for this step


steps by process area

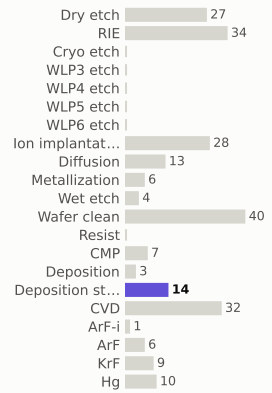

materials deposited (g)

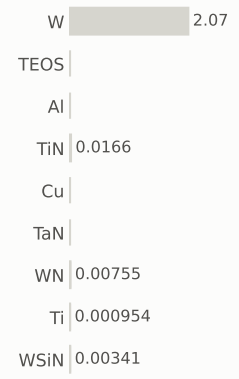

gases emitted (g)




Step #2600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	199.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step


zoomed to fit

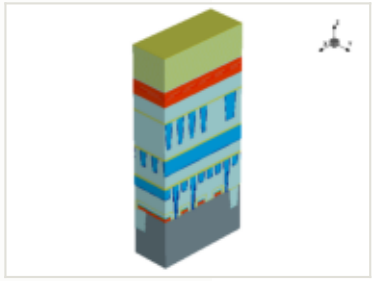






x cut at 0.000 µm

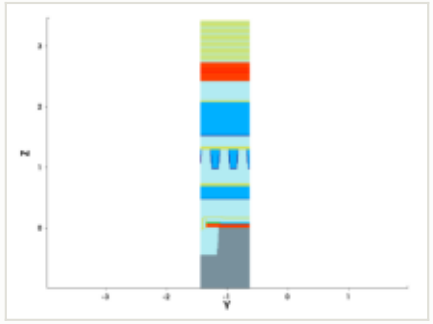

y cut at -1.035 µm

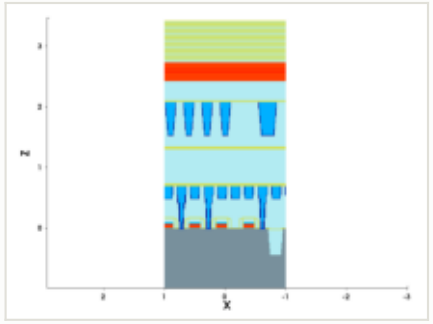


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

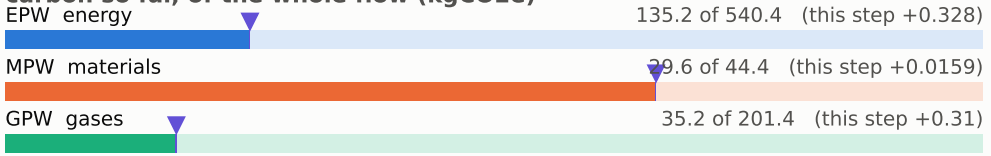


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

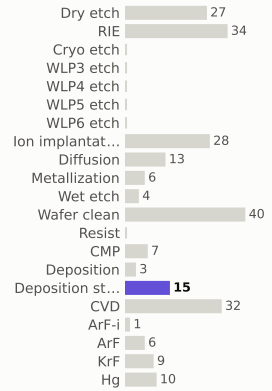

materials deposited (g)

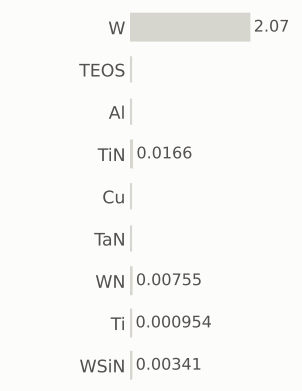

gases emitted (g)

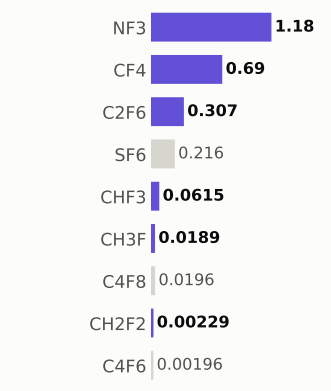


Step #2610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	200.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

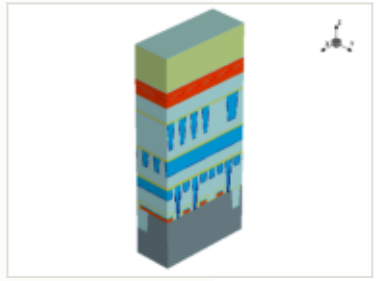




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

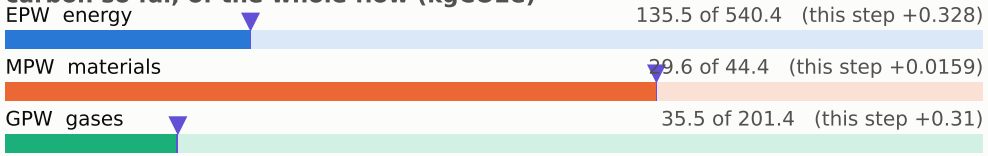


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

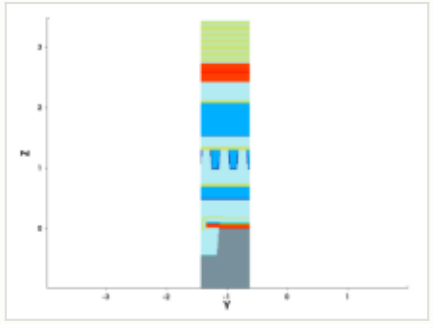


y cut at -1.035 µm

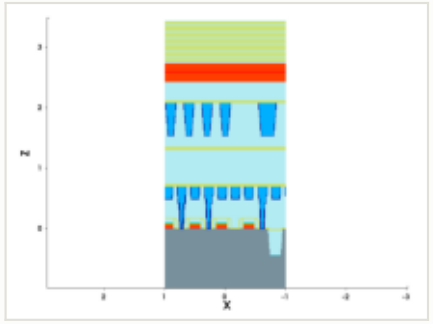

mask for this step

no mask for this step


steps by process area

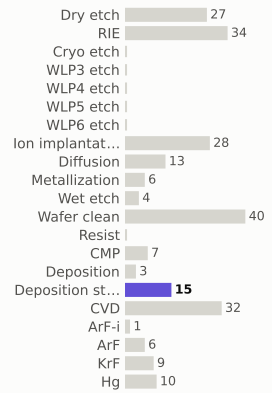

materials deposited (g)



gases emitted (g)

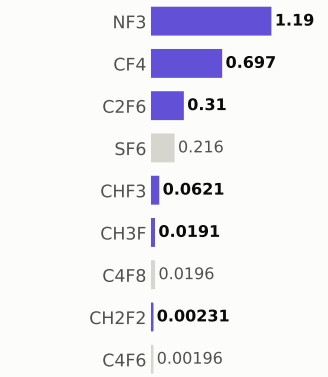


Step #2620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	201.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

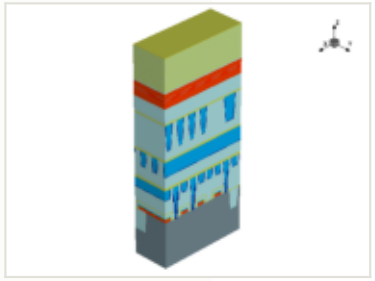




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

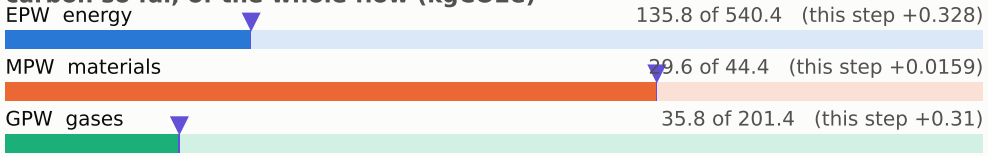


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

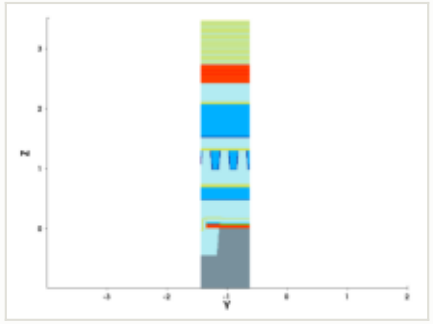


y cut at -1.035 µm

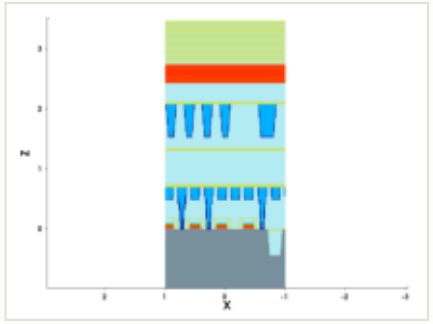

mask for this step

no mask for this step


steps by process area

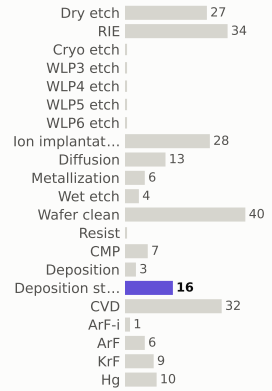

materials deposited (g)



gases emitted (g)

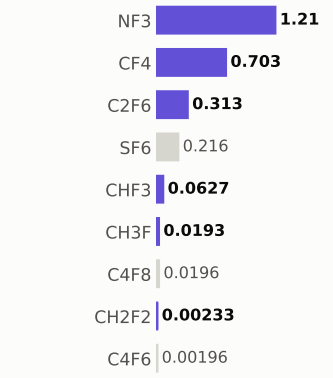


Step #2630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	201.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

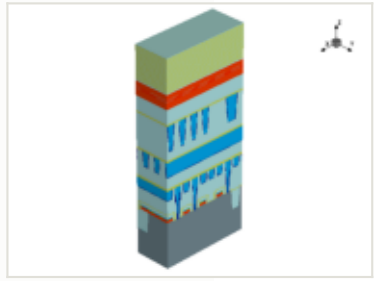



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 136.1 of 540.4 (this step +0.328)


MPW materials — 39.6 of 44.4 (this step +0.0159)

GPW gases — 36.1 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

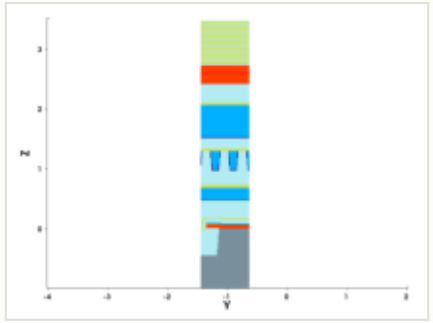


y cut at -1.035 µm

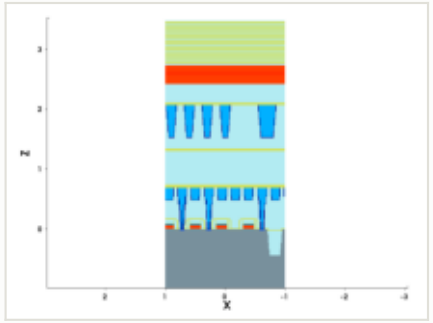


mask for this step

no mask for this step


steps by process area

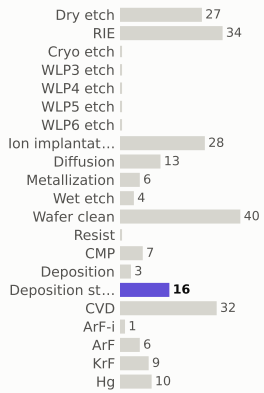

materials deposited (g)

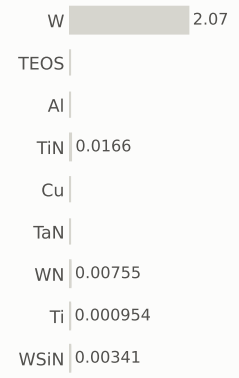

gases emitted (g)




Step #2640: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	202.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

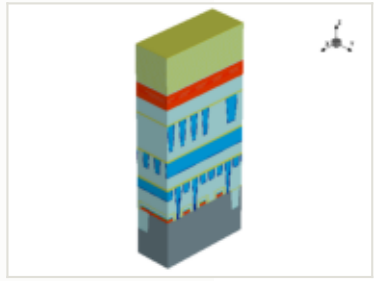




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

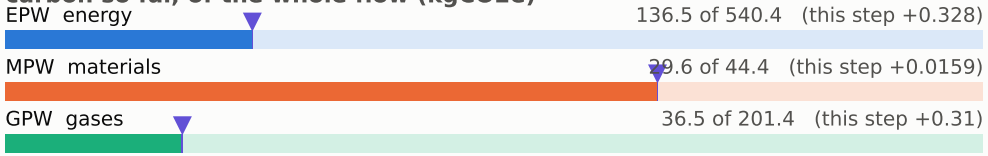


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

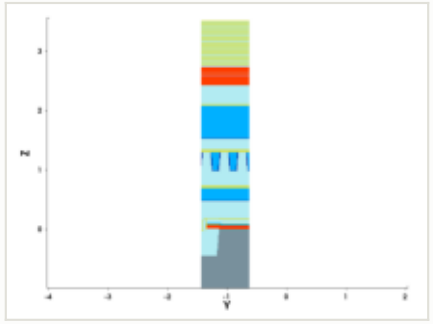


y cut at -1.035 µm

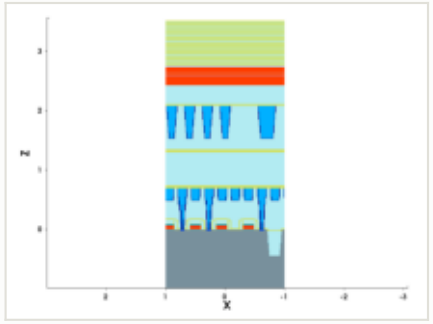

mask for this step

no mask for this step


steps by process area

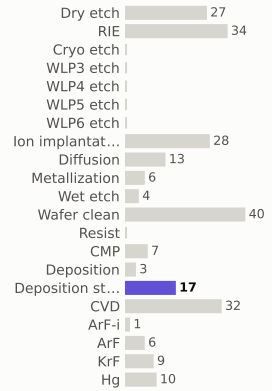

materials deposited (g)



gases emitted (g)




Step #2650: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	203.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

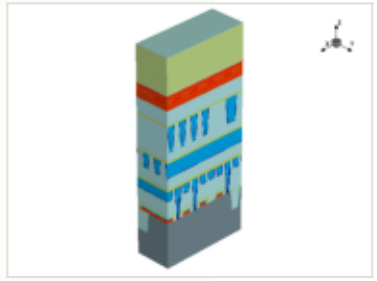




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

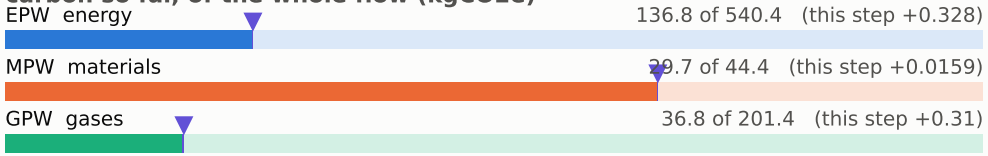


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

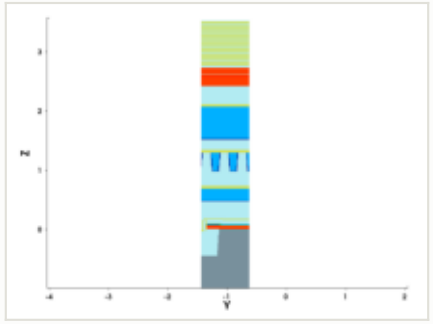


y cut at -1.035 µm

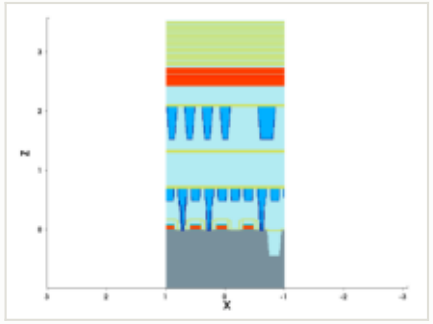

mask for this step

no mask for this step


steps by process area

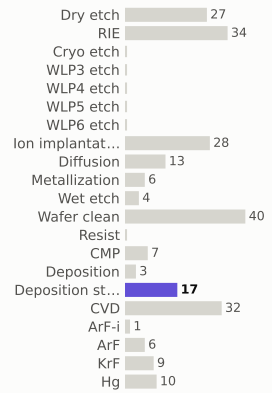

materials deposited (g)



gases emitted (g)




Step #2660: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	203.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

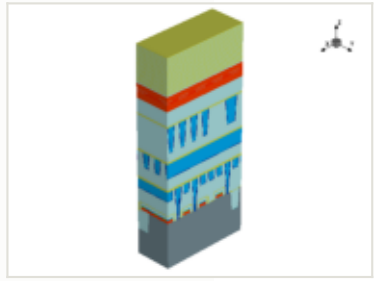




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

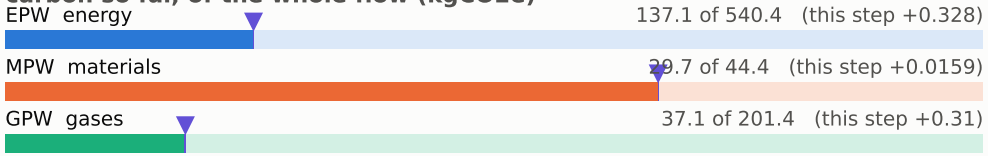


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

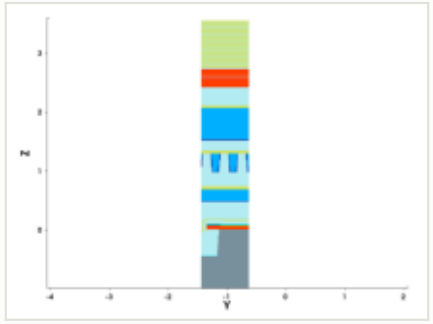


y cut at -1.035 µm

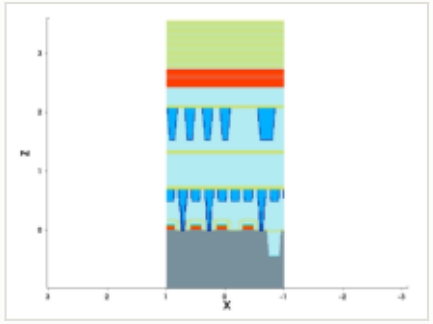


mask for this step

no mask for this step


steps by process area

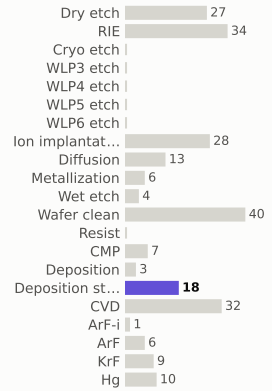

materials deposited (g)

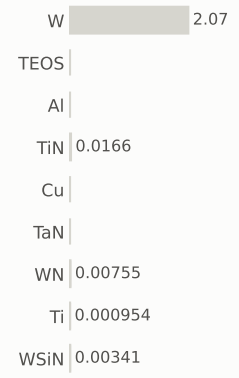

gases emitted (g)




Step #2670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	204.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

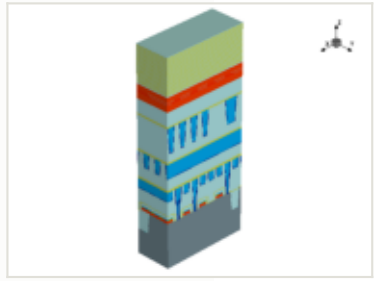



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 137.4 of 540.4 (this step +0.328)


MPW materials — 39.7 of 44.4 (this step +0.0159)

GPW gases — 37.4 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

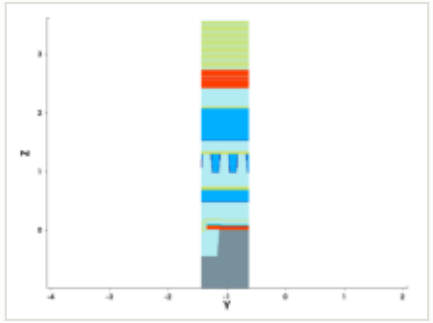


y cut at -1.035 µm

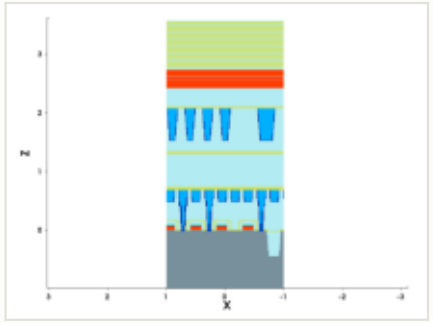


mask for this step

no mask for this step


steps by process area

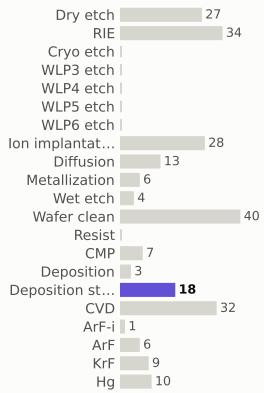

materials deposited (g)

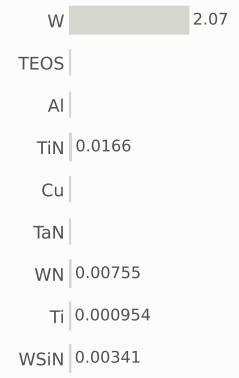

gases emitted (g)




Step #2680: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	205.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

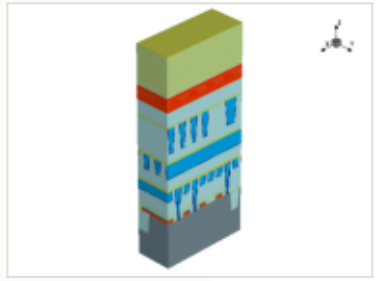



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 137.8 of 540.4 (this step +0.328)


MPW materials — 39.7 of 44.4 (this step +0.0159)

GPW gases — 37.7 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

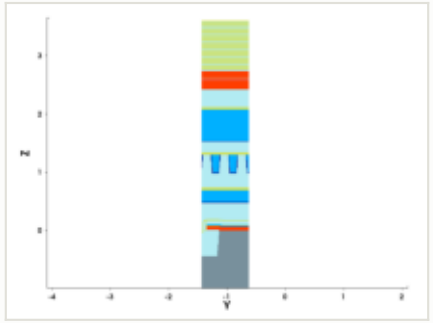


y cut at -1.035 µm

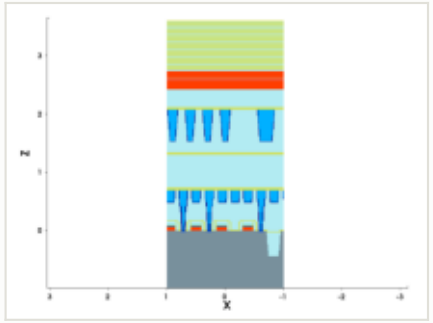


mask for this step

no mask for this step


steps by process area

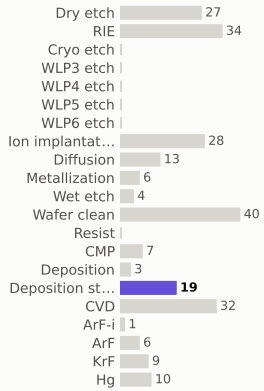

materials deposited (g)

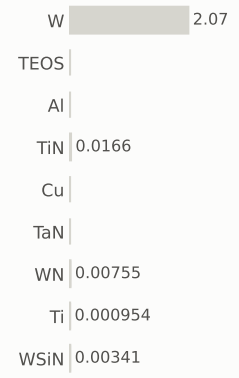

gases emitted (g)




Step #2690: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	205.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

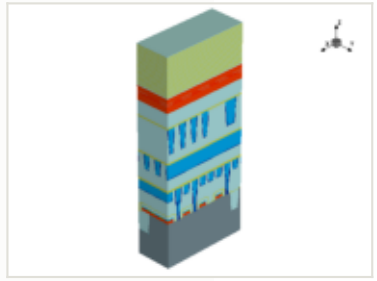



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 138.1 of 540.4 (this step +0.328)


MPW materials — 39.7 of 44.4 (this step +0.0159)

GPW gases — 38 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

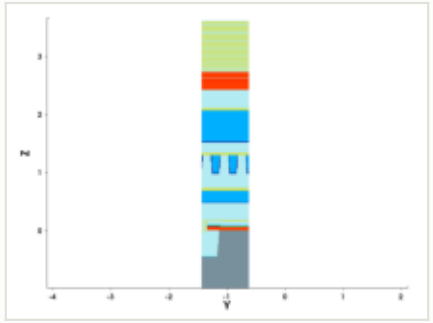


y cut at -1.035 µm

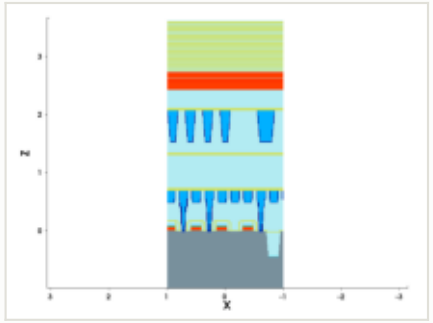


mask for this step

no mask for this step


steps by process area

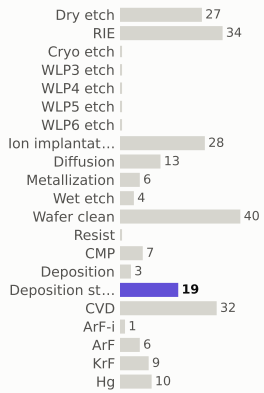

materials deposited (g)

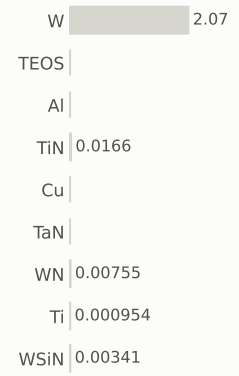

gases emitted (g)




Step #2700: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	206.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

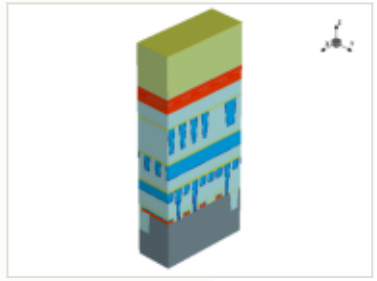



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 138.4 of 540.4 (this step +0.328)


MPW materials — 39.7 of 44.4 (this step +0.0159)

GPW gases — 38.3 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

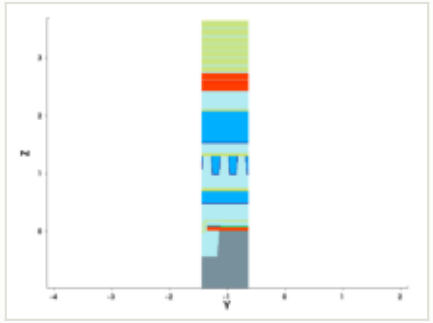


y cut at -1.035 µm

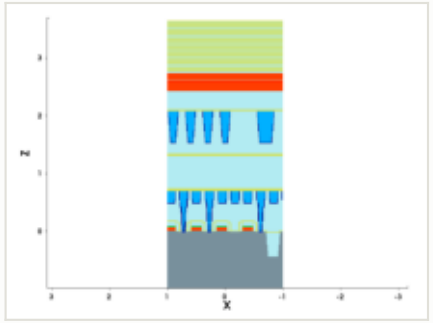


mask for this step

no mask for this step


steps by process area

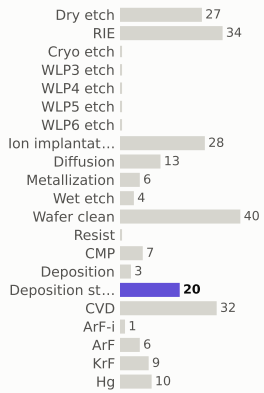

materials deposited (g)

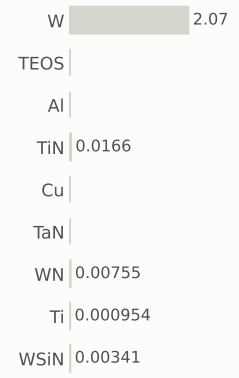

gases emitted (g)




Step #2710: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	207.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

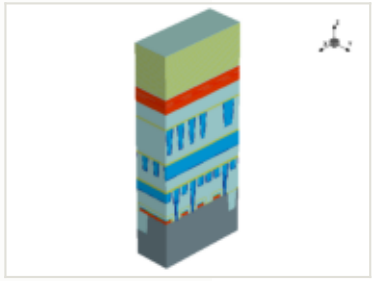



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 138.8 of 540.4 (this step +0.328)


MPW materials — 39.7 of 44.4 (this step +0.0159)

GPW gases — 38.6 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

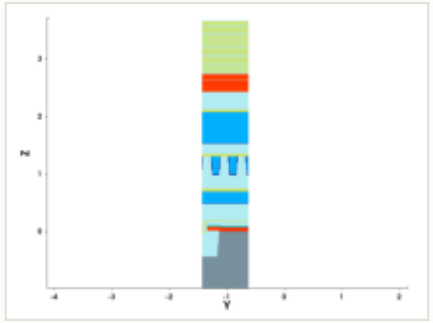


y cut at -1.035 µm

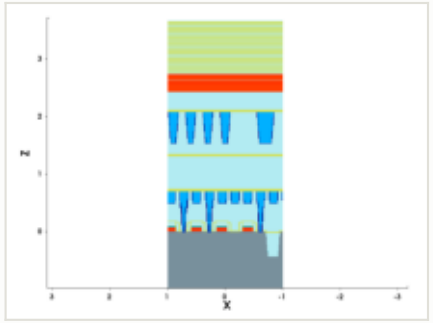


mask for this step

no mask for this step


steps by process area

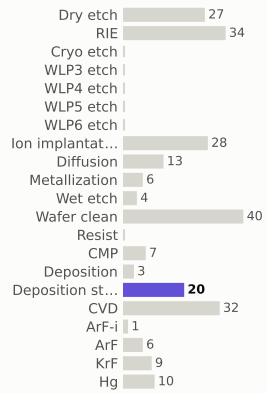

materials deposited (g)

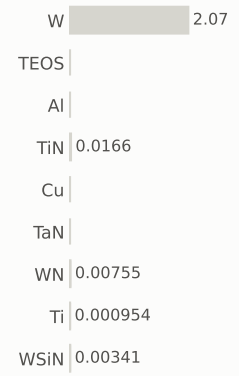

gases emitted (g)




Step #2720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	207.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

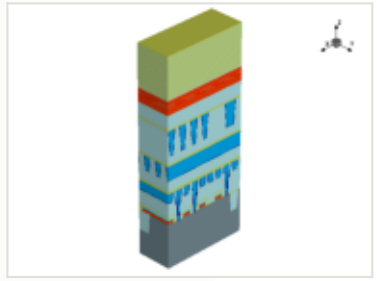






this step


process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

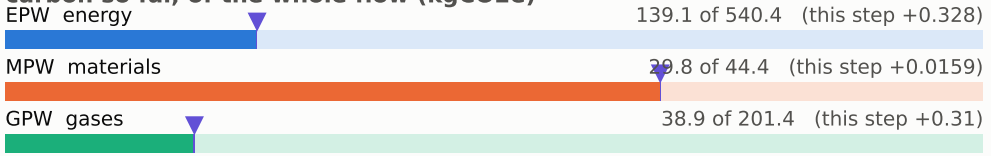


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

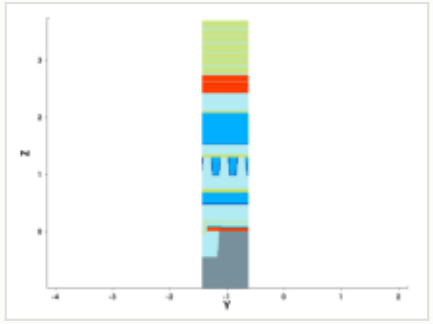


y cut at -1.035 µm

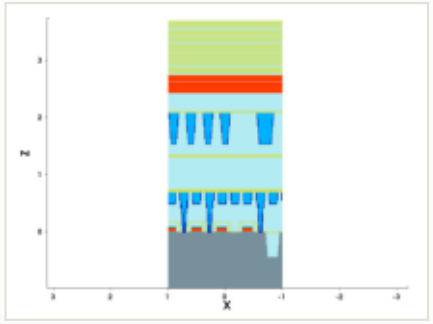

mask for this step

no mask for this step


steps by process area

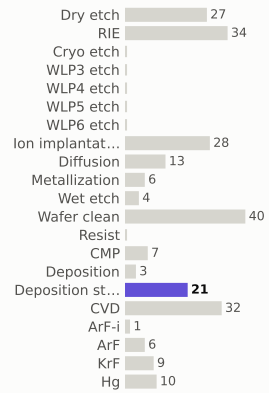

materials deposited (g)



gases emitted (g)




Step #2730: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	208.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

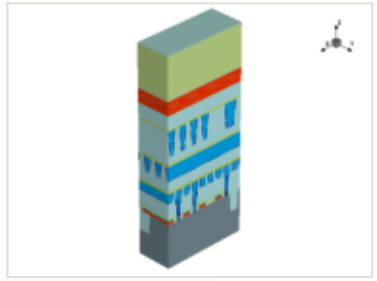






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

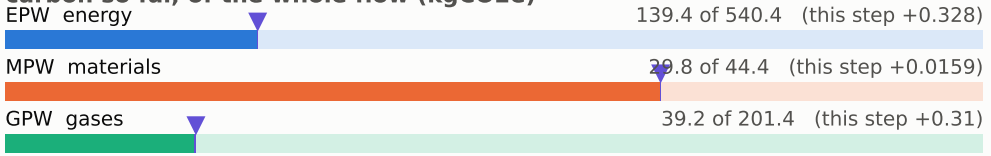


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

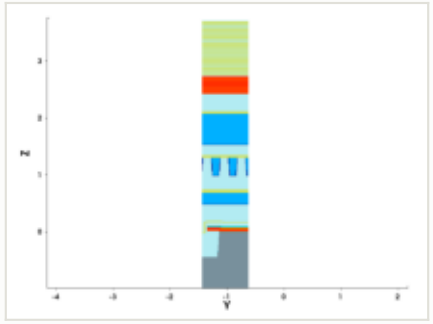


y cut at -1.035 µm

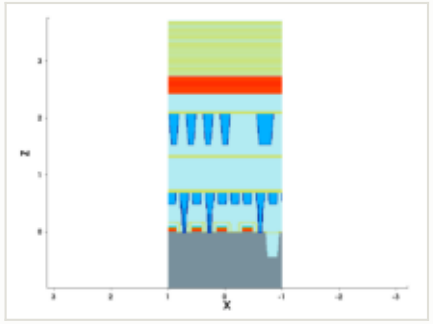

mask for this step

no mask for this step


steps by process area

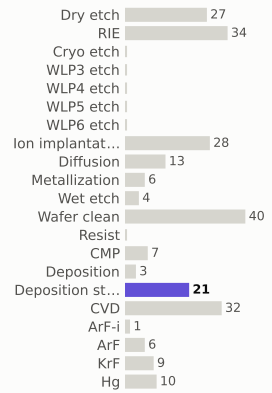

materials deposited (g)



gases emitted (g)




Step #2740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	209.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

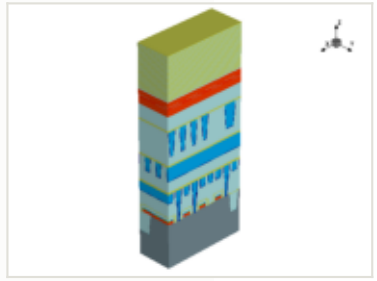






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

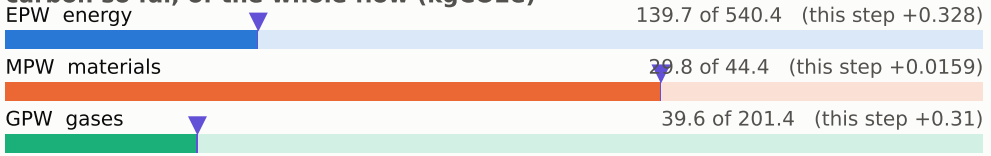


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

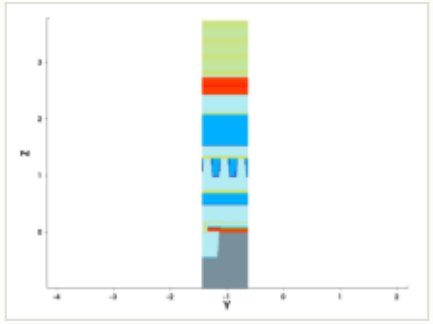


y cut at -1.035 µm

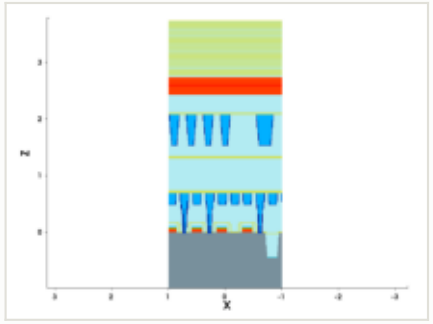


mask for this step

no mask for this step


steps by process area

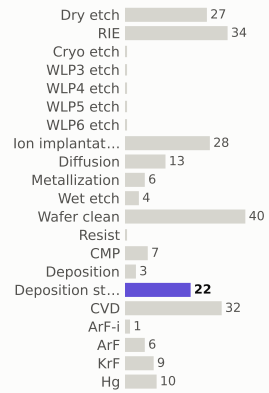

materials deposited (g)

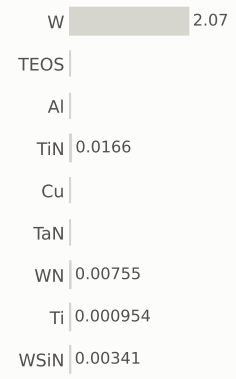

gases emitted (g)




Step #2750: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	209.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

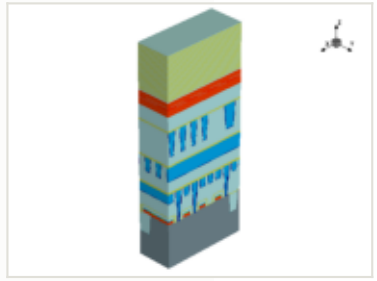






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

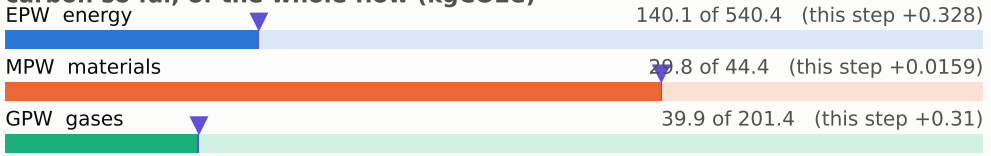


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

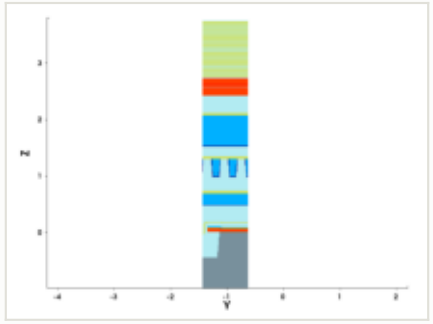


y cut at -1.035 µm

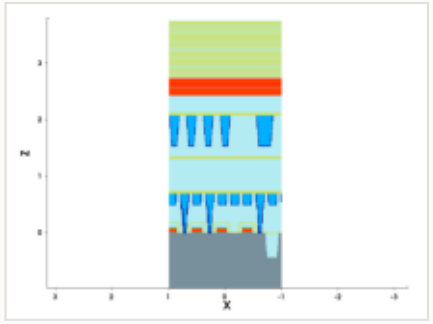


mask for this step

no mask for this step


steps by process area

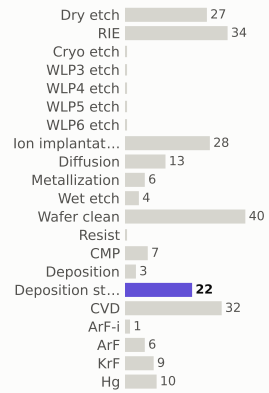

materials deposited (g)

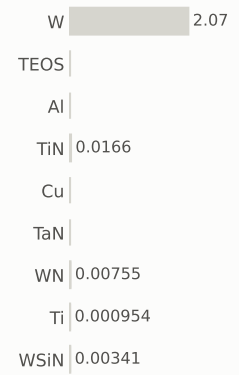

gases emitted (g)




Step #2760: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	210.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

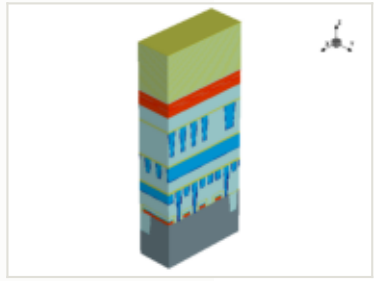






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

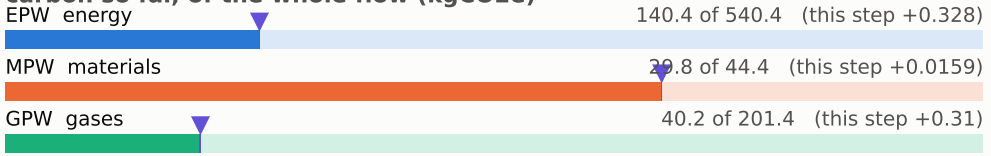


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

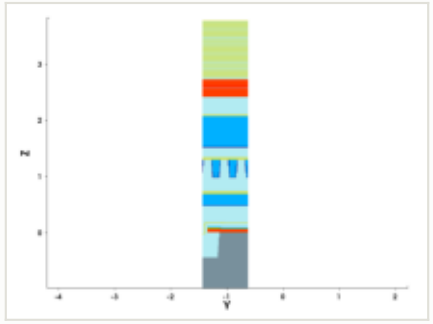


y cut at -1.035 µm

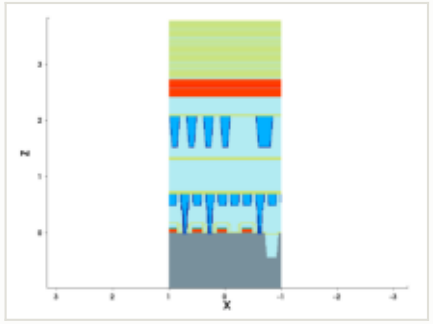

mask for this step

no mask for this step


steps by process area

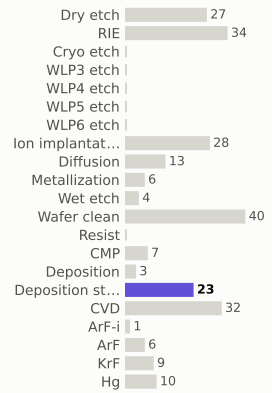

materials deposited (g)



gases emitted (g)

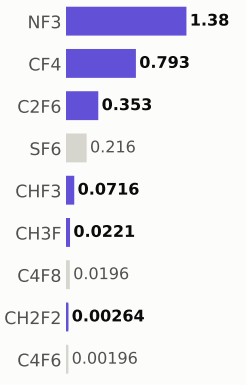


Step #2770: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	211.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

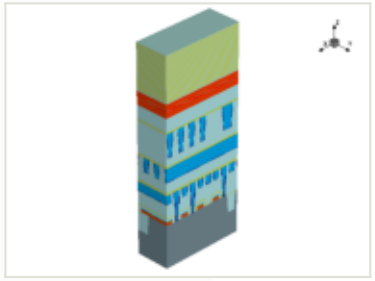



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 140.7 of 540.4 (this step +0.328)


MPW materials — 39.8 of 44.4 (this step +0.0159)

GPW gases — 40.5 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

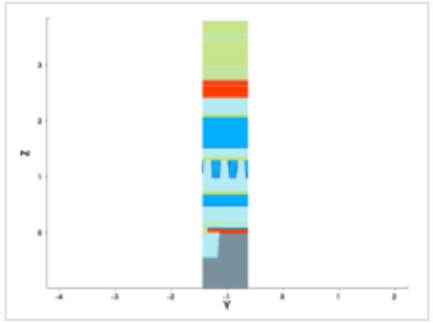


y cut at -1.035 µm

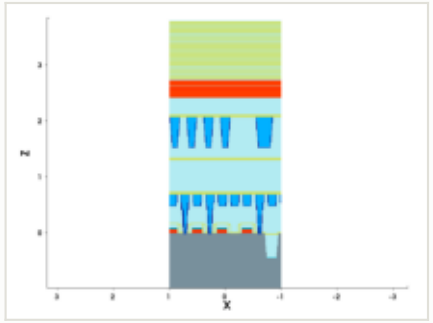


mask for this step

no mask for this step


steps by process area

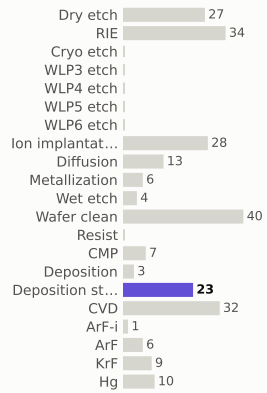

materials deposited (g)

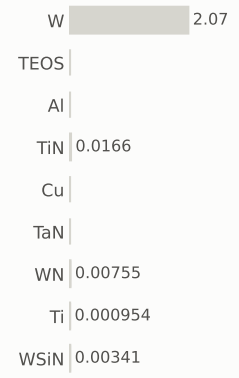

gases emitted (g)




Step #2780: Deposition_stack

depo_anisotropic · Deposition_stack


0.654	211.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

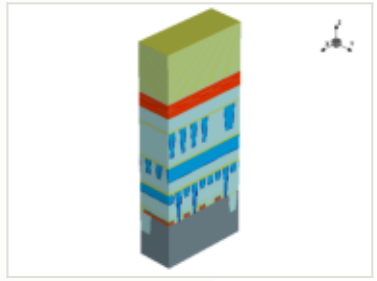






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

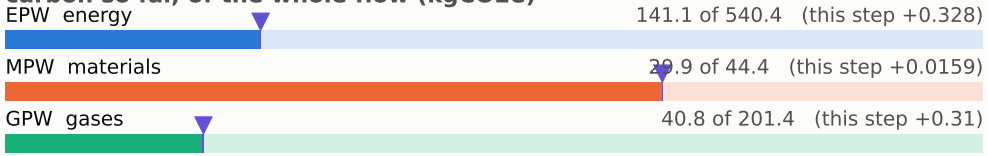


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

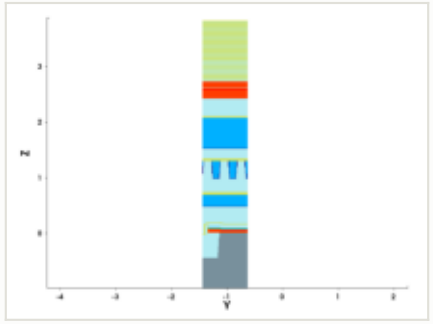


y cut at -1.035 µm

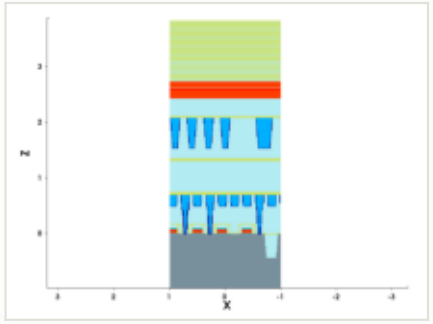

mask for this step

no mask for this step


steps by process area

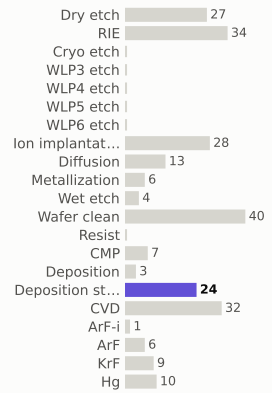

materials deposited (g)



gases emitted (g)

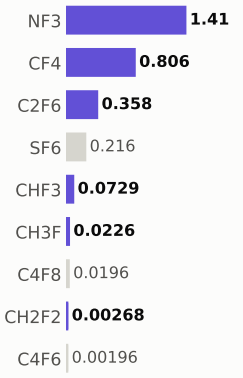


Step #2790: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	212.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

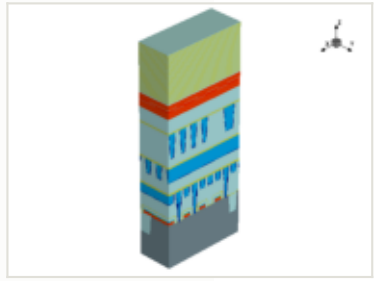






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

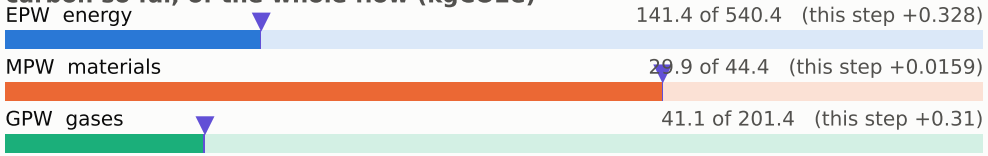


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

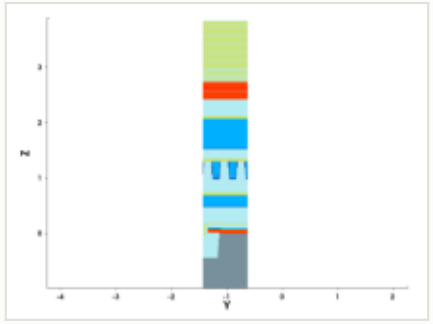


y cut at -1.035 µm

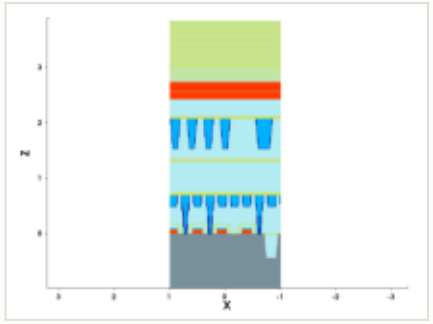

mask for this step

no mask for this step


steps by process area

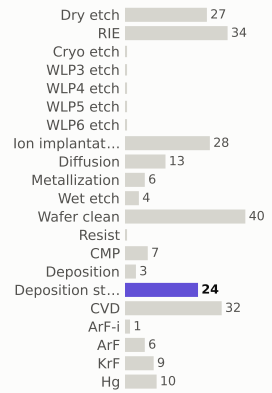

materials deposited (g)



gases emitted (g)




Step #2800: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	213.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

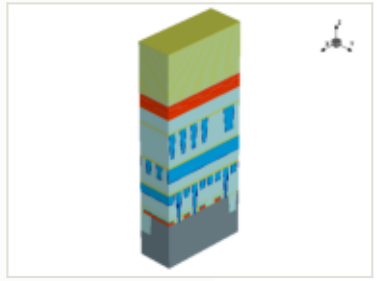






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

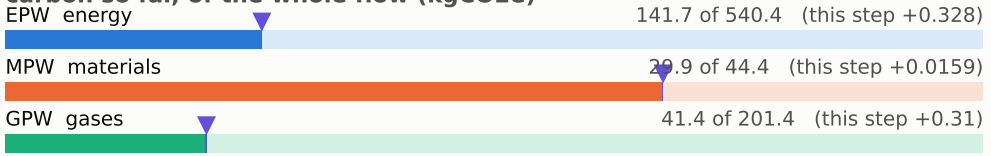


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

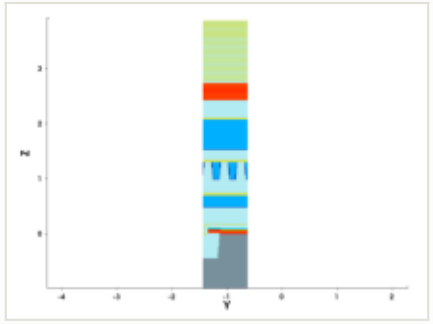


y cut at -1.035 µm

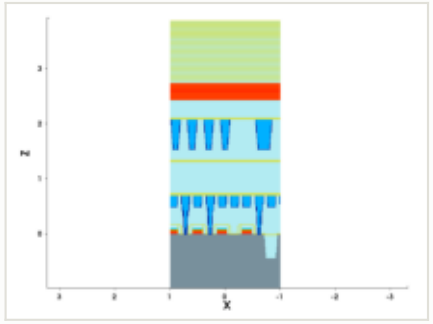


mask for this step

no mask for this step


steps by process area

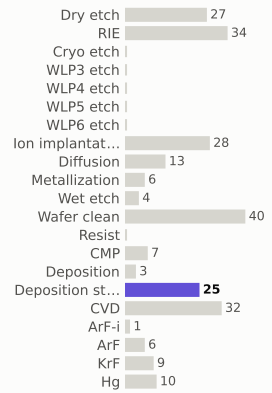

materials deposited (g)

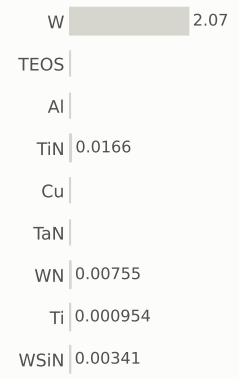

gases emitted (g)




Step #2810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	213.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

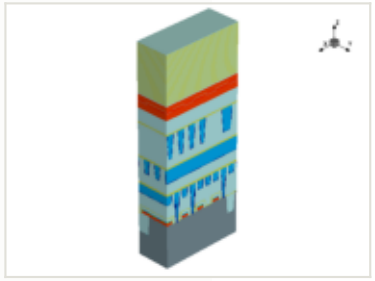



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 142.0 of 540.4 (this step +0.328)


MPW materials — 29.9 of 44.4 (this step +0.0159)

GPW gases — 41.7 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

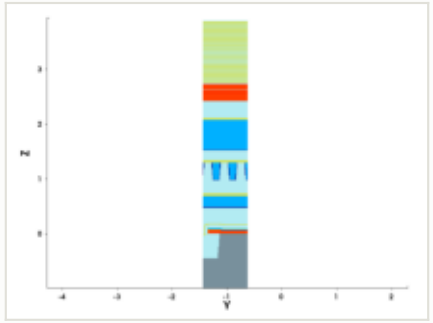


y cut at -1.035 µm

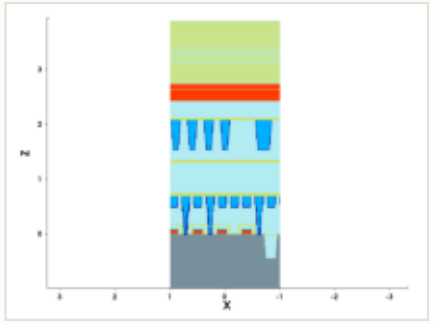


mask for this step

no mask for this step


steps by process area

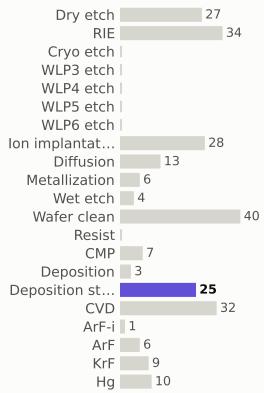

materials deposited (g)

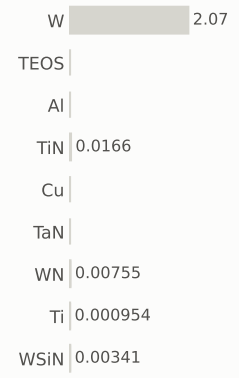

gases emitted (g)




Step #2820: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	214.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

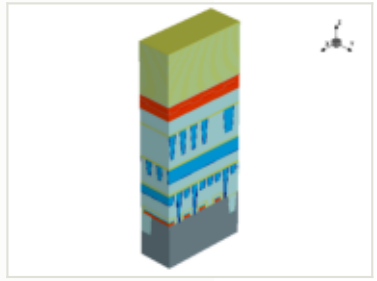




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

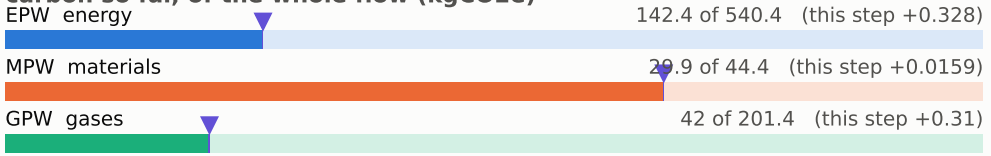


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

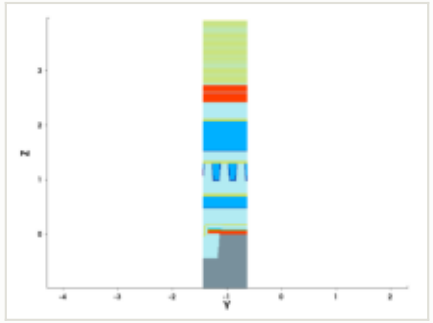


y cut at -1.035 µm

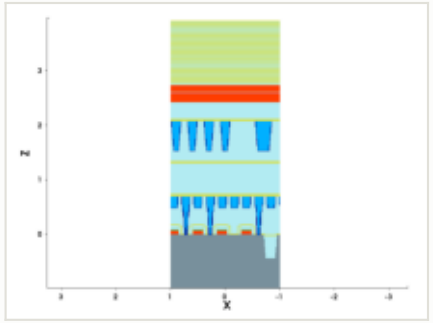


mask for this step

no mask for this step


steps by process area

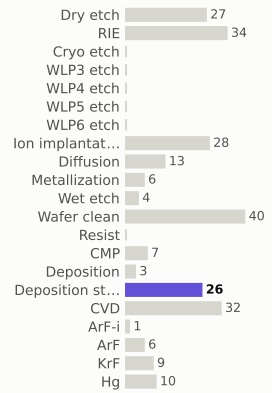

materials deposited (g)

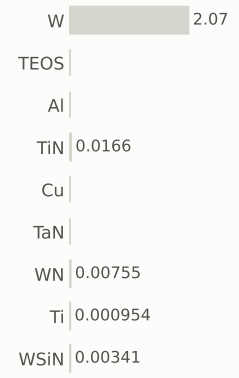

gases emitted (g)

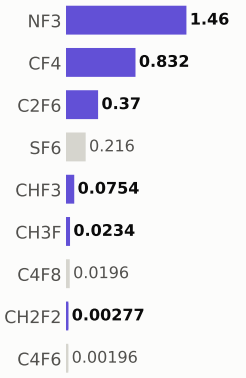


Step #2830: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	215.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

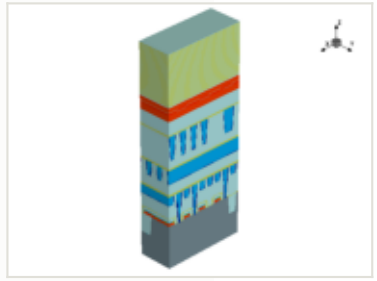






this step


process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

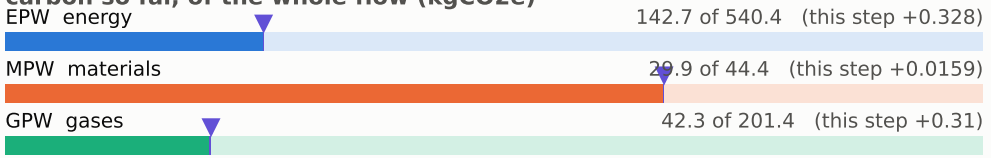


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

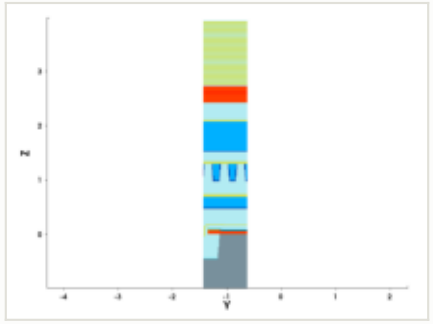


y cut at -1.035 µm

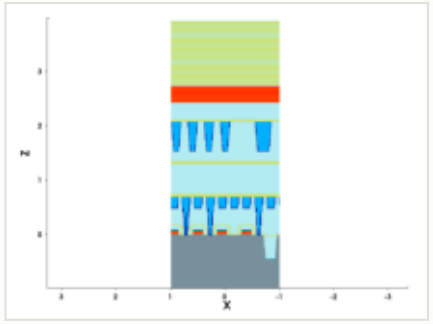


mask for this step

no mask for this step


steps by process area

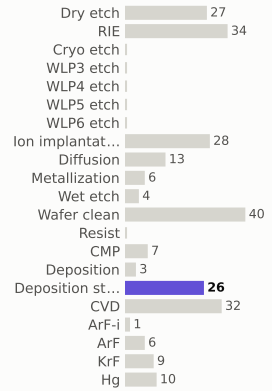

materials deposited (g)

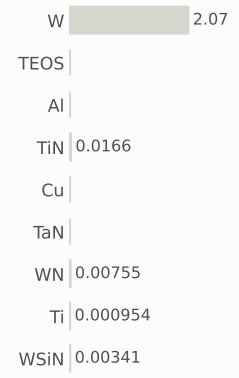

gases emitted (g)




Step #2840: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	215.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

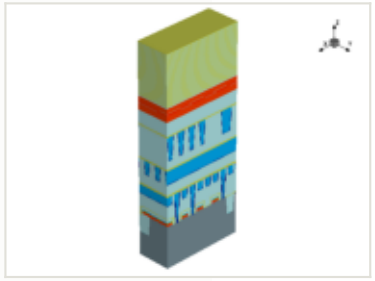



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 143.0 of 540.4 (this step +0.328)


MPW materials — 30 of 44.4 (this step +0.0159)

GPW gases — 42.7 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

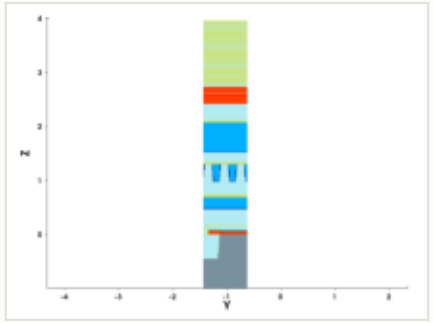


y cut at -1.035 µm

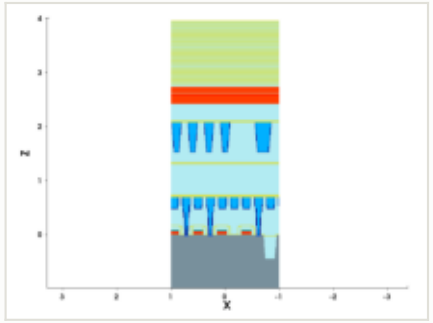


mask for this step

no mask for this step


steps by process area

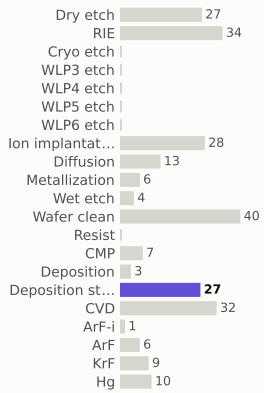

materials deposited (g)

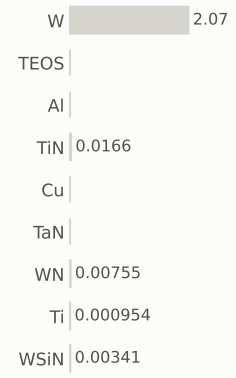

gases emitted (g)

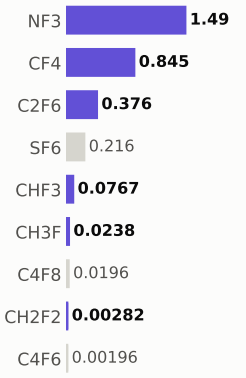


Step #2850: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	216.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

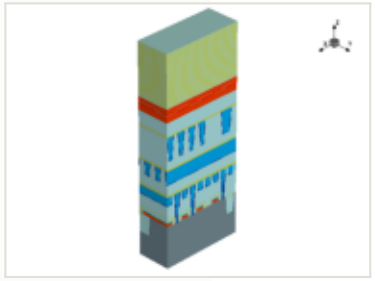





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

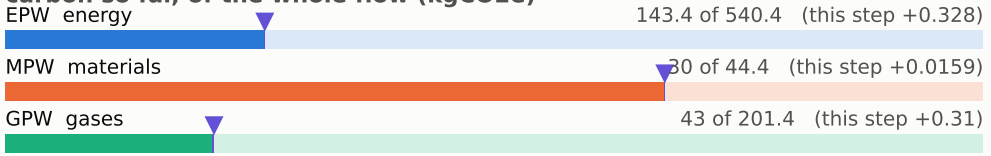


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

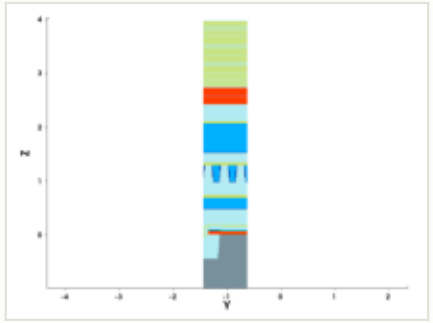


y cut at -1.035 µm

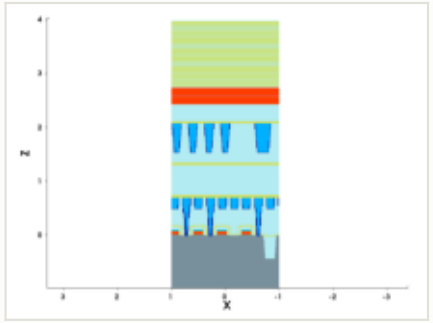


mask for this step

no mask for this step


steps by process area



materials deposited (g)

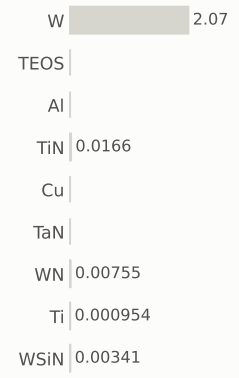

gases emitted (g)




Step #2860: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	216.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

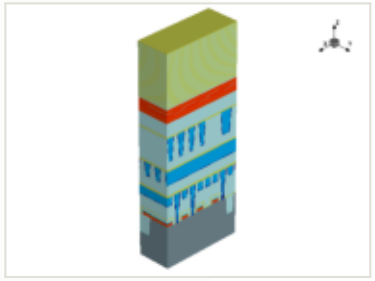



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 143.7 of 540.4 (this step +0.328)


MPW materials — 30 of 44.4 (this step +0.0159)

GPW gases — 43.3 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

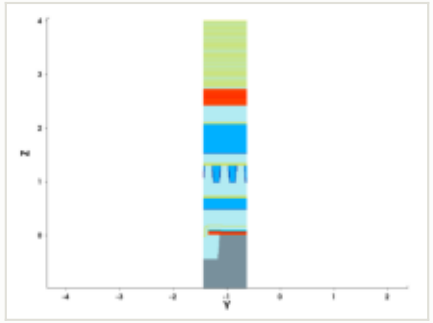


y cut at -1.035 µm

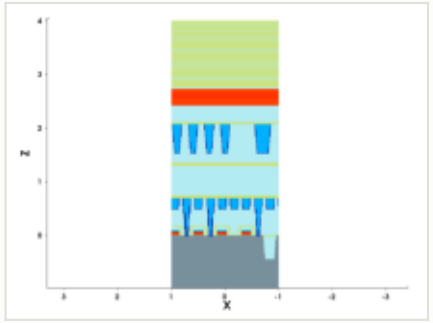


mask for this step

no mask for this step


steps by process area

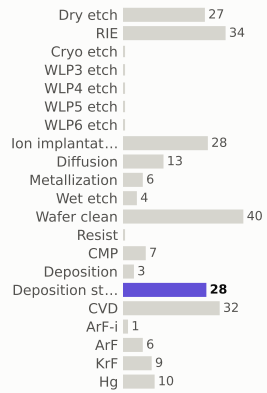

materials deposited (g)

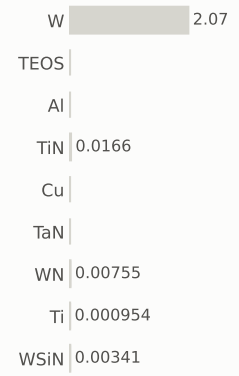

gases emitted (g)




Step #2870: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	217.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

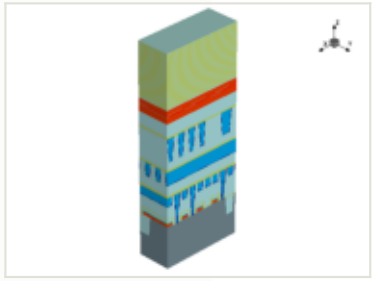






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

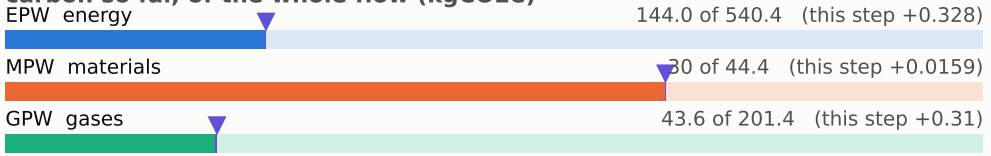


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

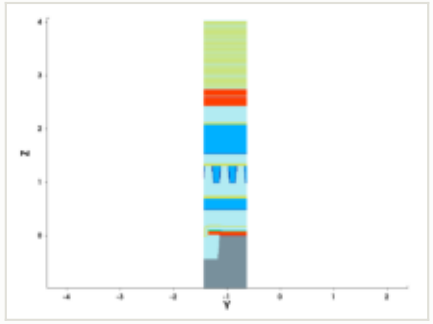


y cut at -1.035 µm

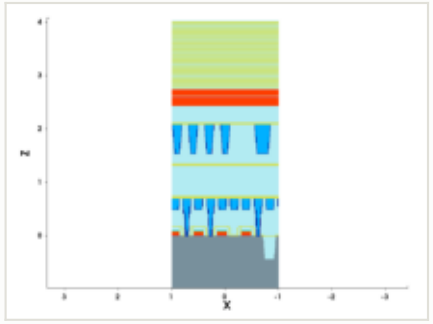


mask for this step

no mask for this step


steps by process area

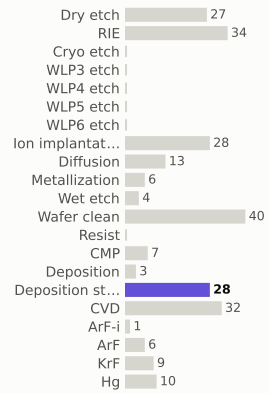

materials deposited (g)

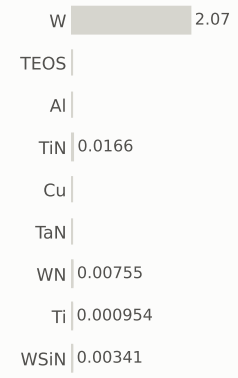

gases emitted (g)




Step #2880: Deposition_stack

depo_anisotropic · Deposition_stack


0.654	218.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

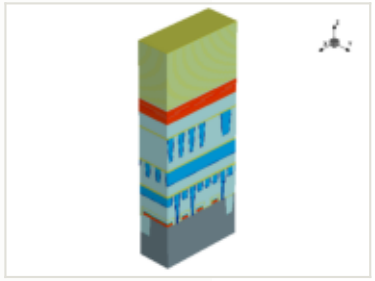






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

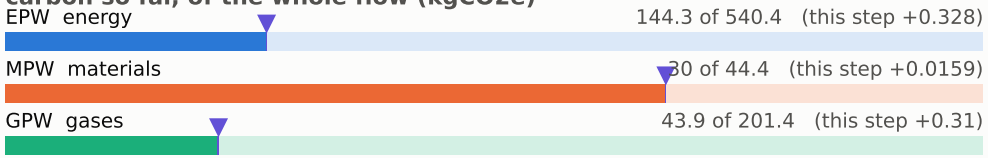


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

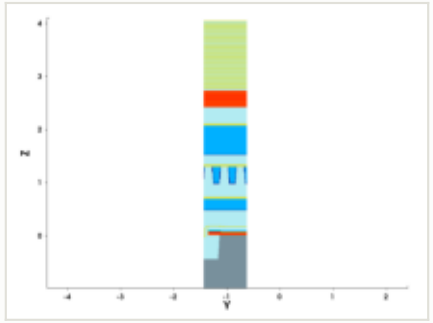


y cut at -1.035 µm

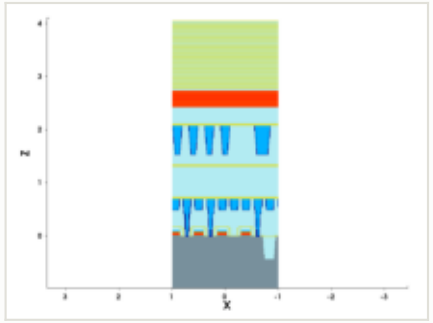


mask for this step

no mask for this step


steps by process area

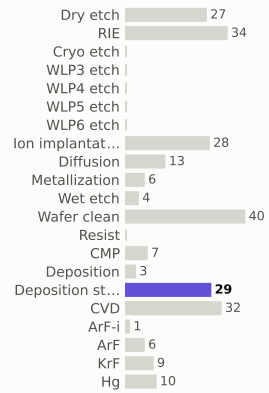

materials deposited (g)

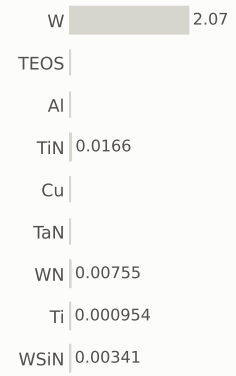

gases emitted (g)

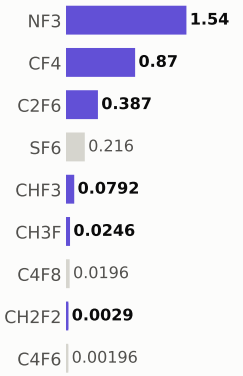


Step #2890: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	218.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

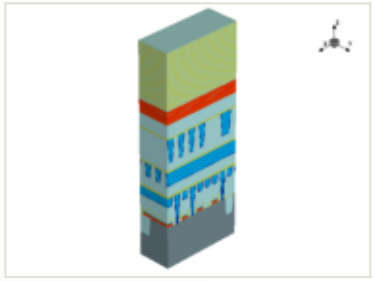






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

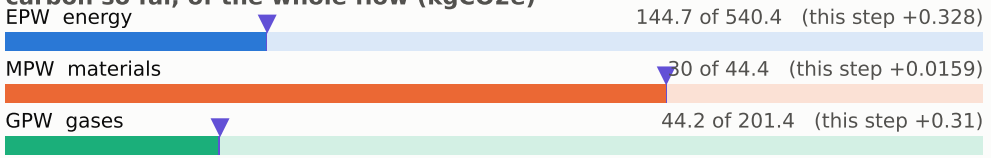


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

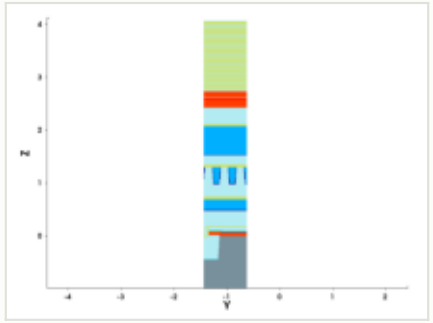


y cut at -1.035 µm

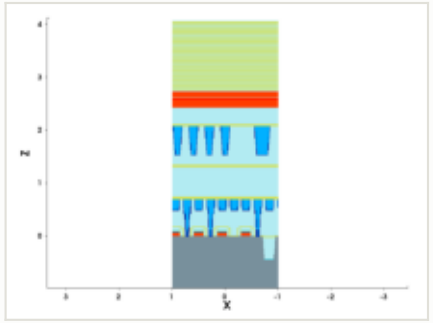

mask for this step

no mask for this step


steps by process area

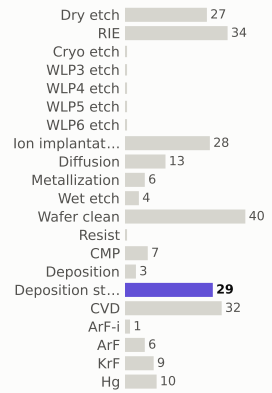

materials deposited (g)



gases emitted (g)




Step #2900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	219.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

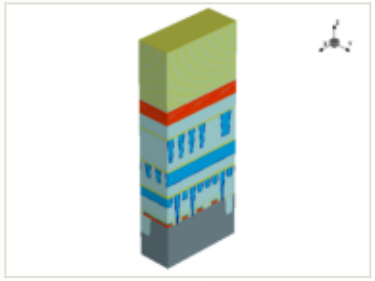




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

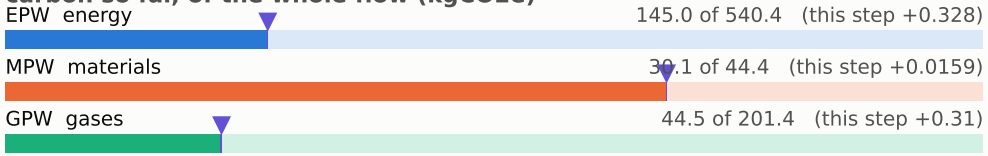


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

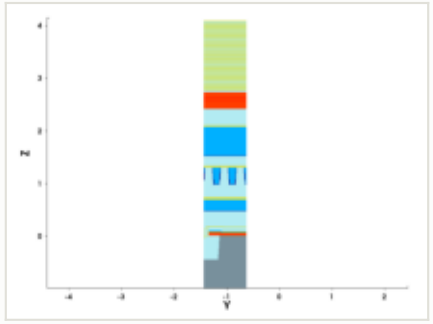


y cut at -1.035 µm

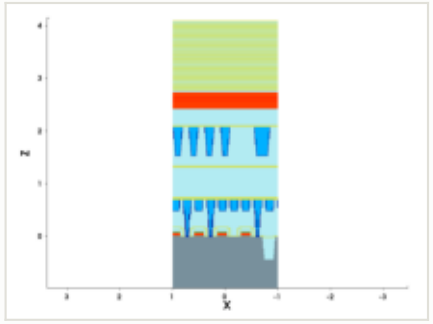


mask for this step

no mask for this step


steps by process area

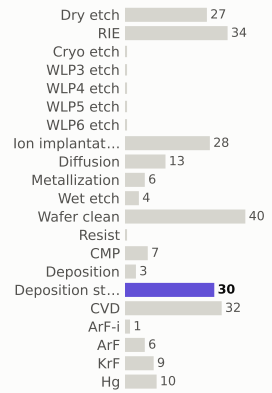

materials deposited (g)

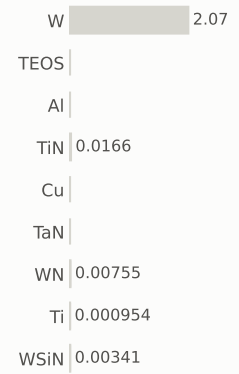

gases emitted (g)




Step #2910: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	220.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

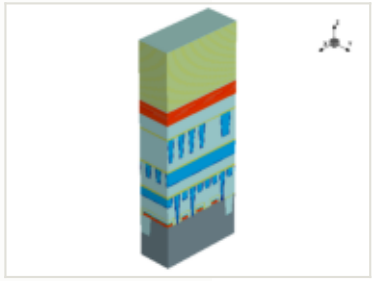






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

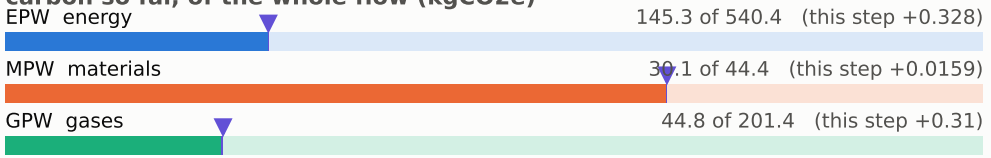


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

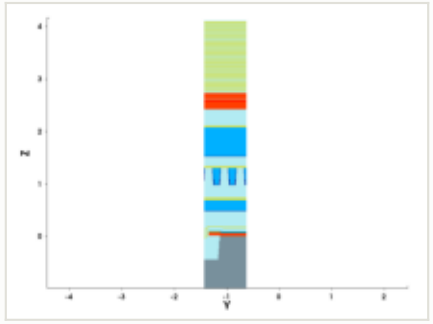


y cut at -1.035 µm

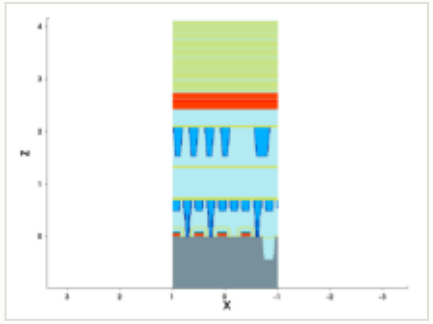

mask for this step

no mask for this step


steps by process area

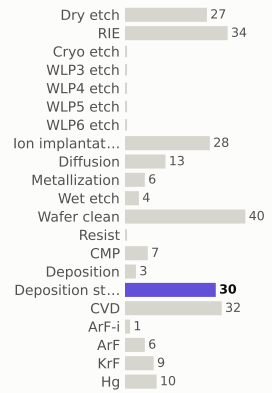

materials deposited (g)



gases emitted (g)




Step #2920: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	220.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

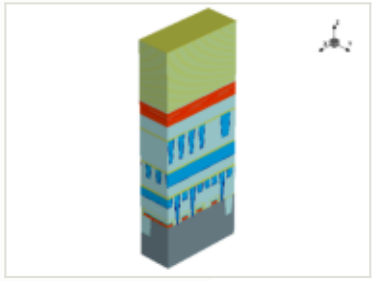




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

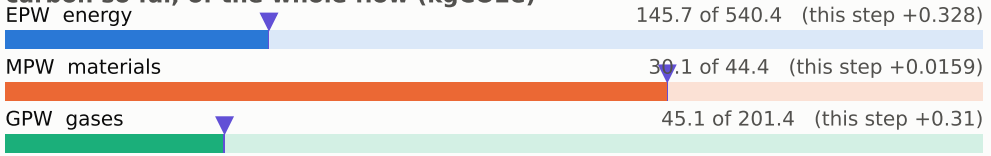


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

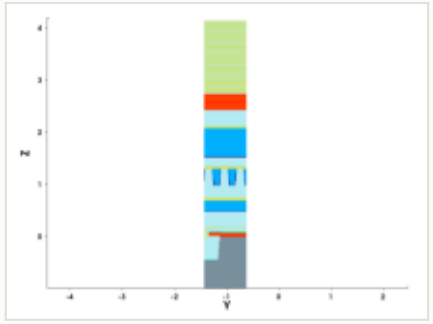


y cut at -1.035 µm

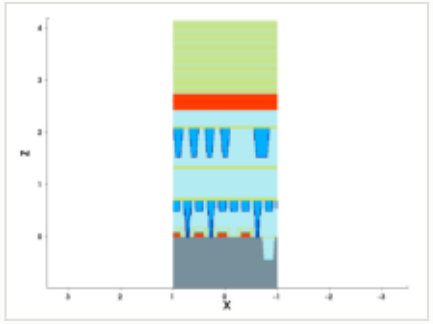


mask for this step

no mask for this step


steps by process area

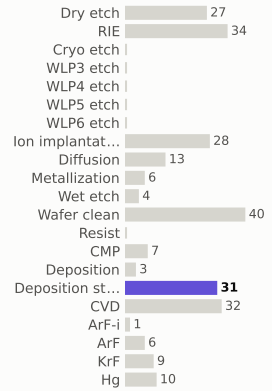

materials deposited (g)

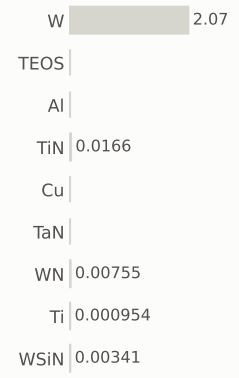

gases emitted (g)




Step #2930: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	221.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

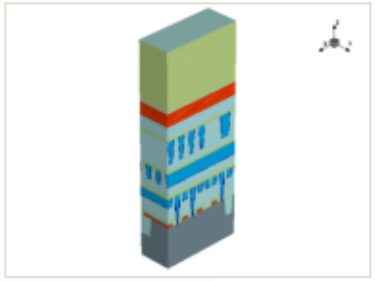



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 146.0 of 540.4 (this step +0.328)


MPW materials — 30.1 of 44.4 (this step +0.0159)

GPW gases — 45.4 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

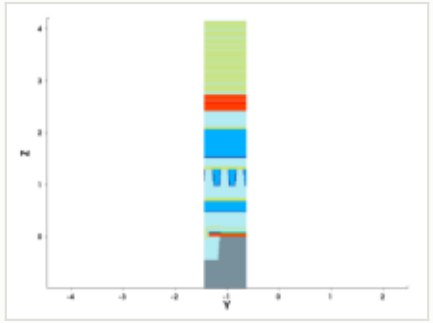


y cut at -1.035 µm

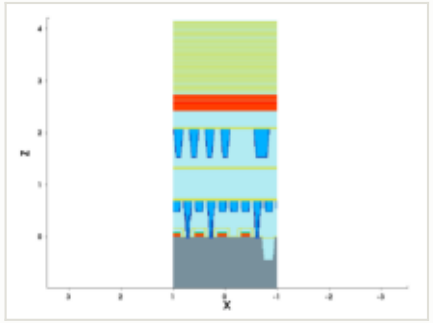


mask for this step

no mask for this step


steps by process area

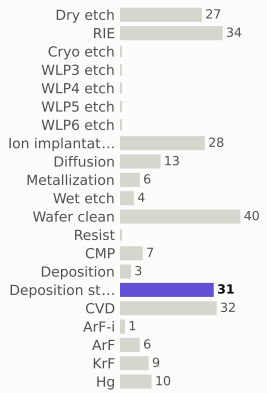

materials deposited (g)

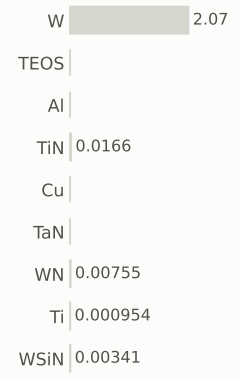

gases emitted (g)




Step #2940: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	222.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

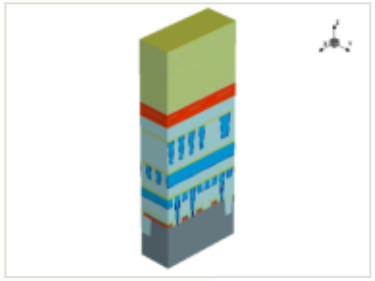






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

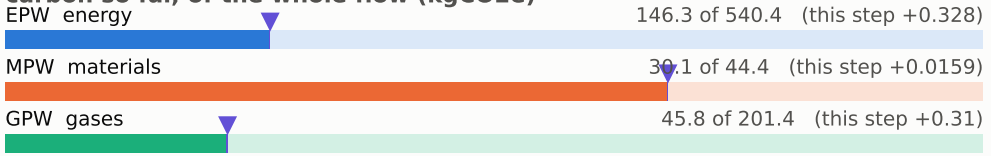


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

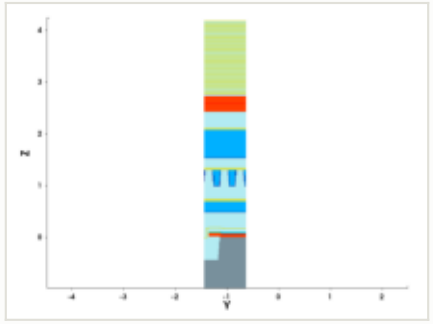


y cut at -1.035 µm

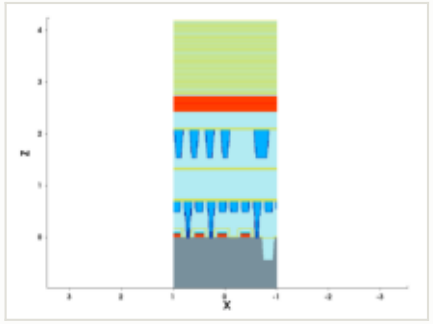

mask for this step

no mask for this step


steps by process area

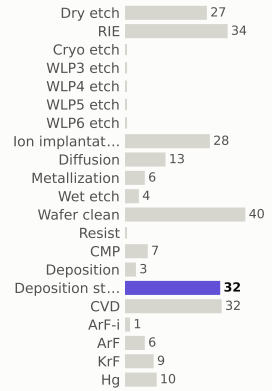

materials deposited (g)



gases emitted (g)




Step #2950: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	222.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

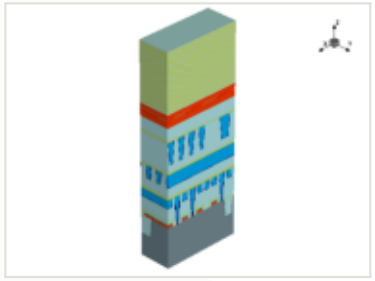



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 146.6 of 540.4 (this step +0.328)


MPW materials — 30.1 of 44.4 (this step +0.0159)

GPW gases — 46.1 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

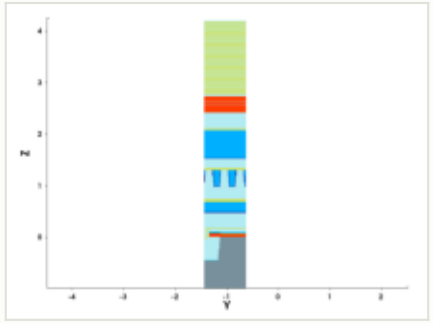


y cut at -1.035 µm

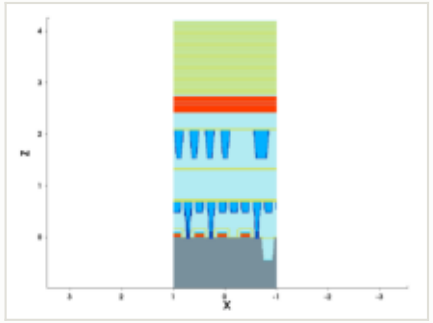


mask for this step

no mask for this step


steps by process area

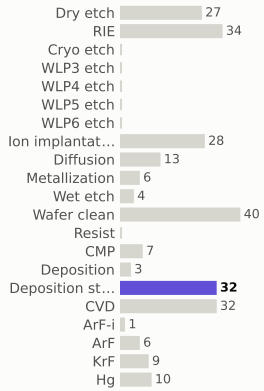

materials deposited (g)

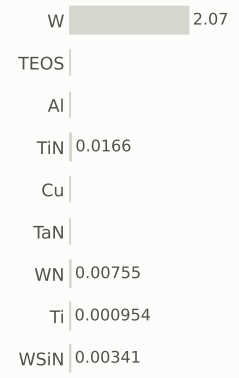

gases emitted (g)




Step #2960: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	223.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

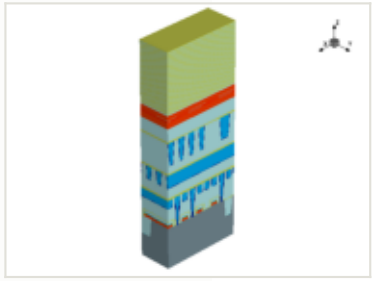






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

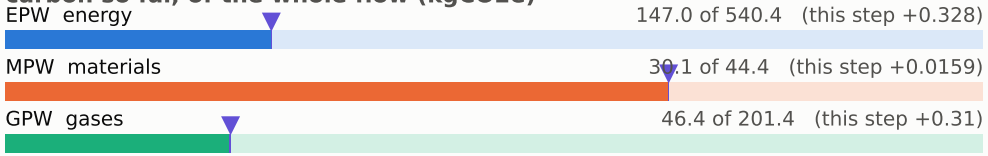


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

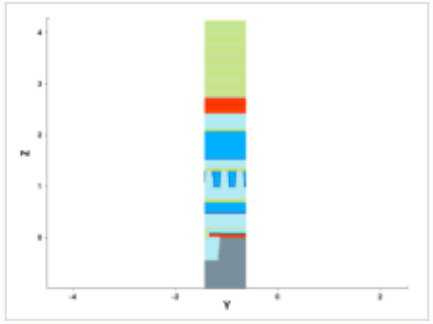


y cut at -1.035 µm

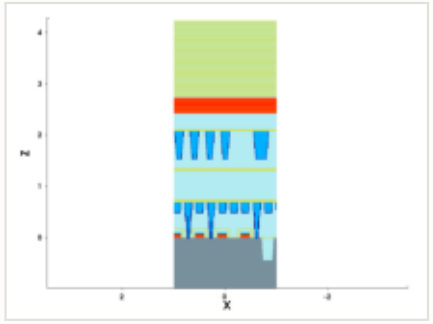


mask for this step

no mask for this step


steps by process area

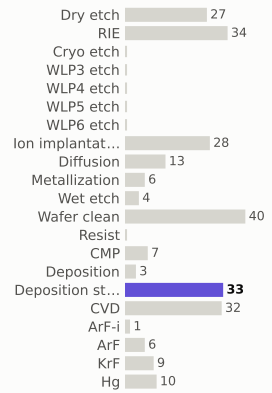

materials deposited (g)

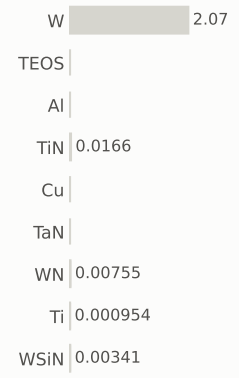

gases emitted (g)




Step #2970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	224.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

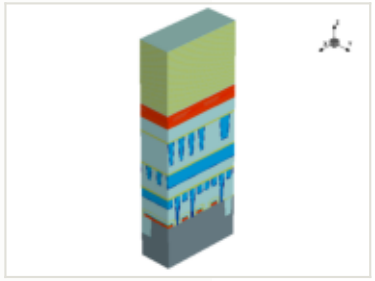



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 147.3 of 540.4 (this step +0.328)


MPW materials — 30.2 of 44.4 (this step +0.0159)

GPW gases — 46.7 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

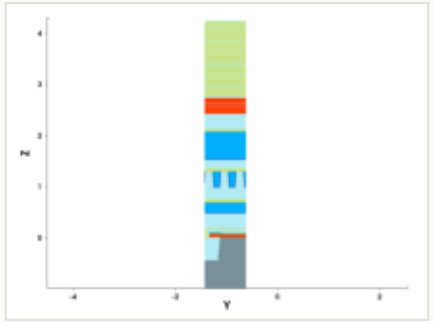


y cut at -1.035 µm

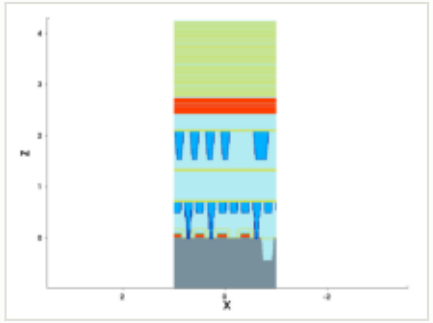


mask for this step

no mask for this step


steps by process area

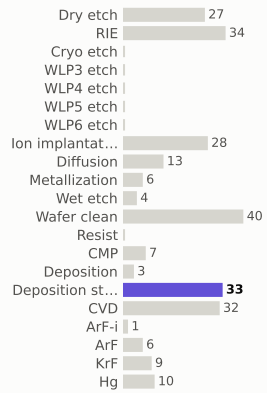

materials deposited (g)

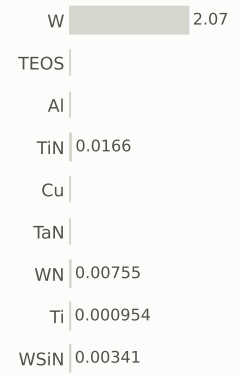

gases emitted (g)




Step #2980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	224.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

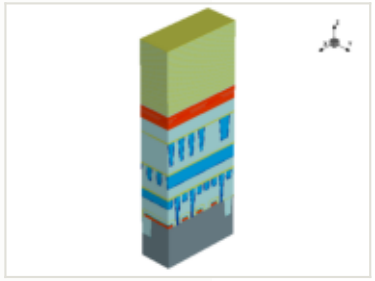






this step

process area	Deposition_stack
material	—
thickness	0.028 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

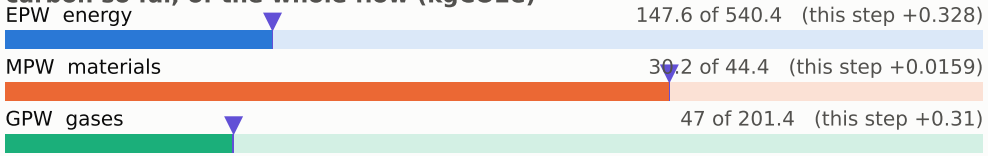


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

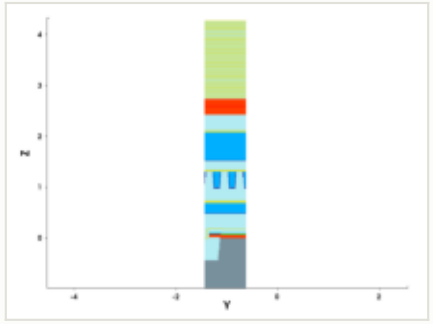


y cut at -1.035 µm

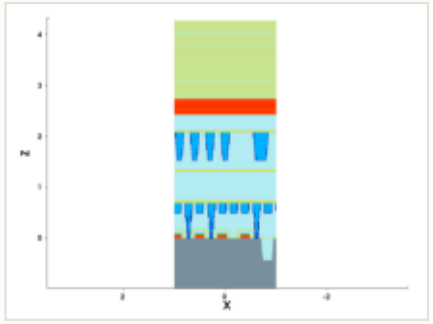


mask for this step

no mask for this step


steps by process area

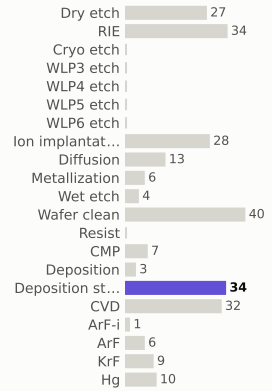

materials deposited (g)

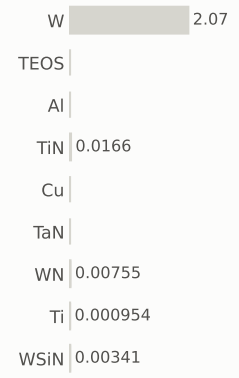

gases emitted (g)




Step #2990: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	225.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

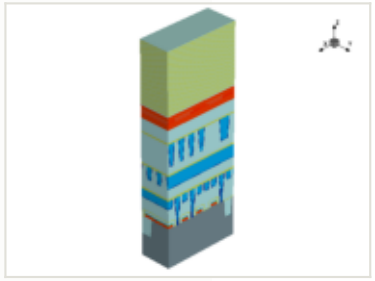






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

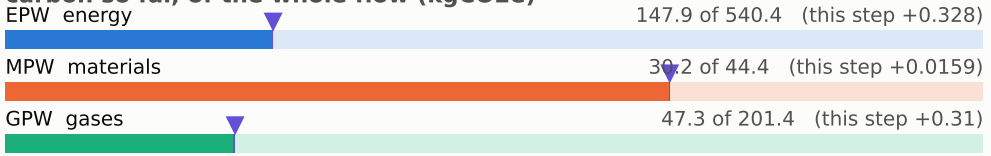


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

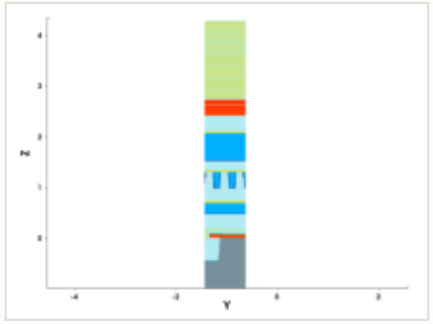


y cut at -1.035 µm

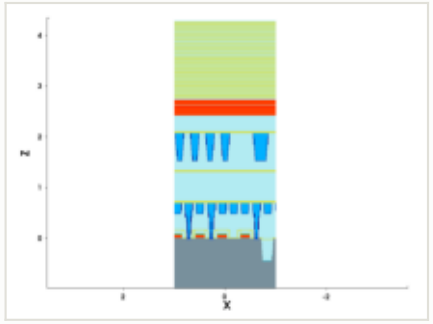


mask for this step

no mask for this step


steps by process area

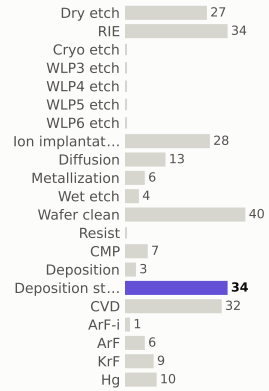

materials deposited (g)

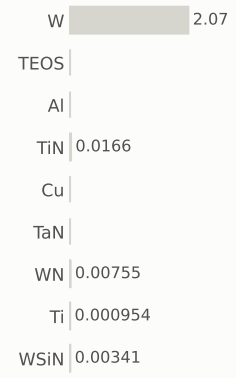

gases emitted (g)




Step #3000: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	226.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

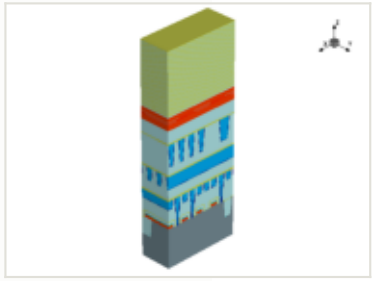



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 148.3 of 540.4 (this step +0.328)


MPW materials — 30.2 of 44.4 (this step +0.0159)

GPW gases — 47.6 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

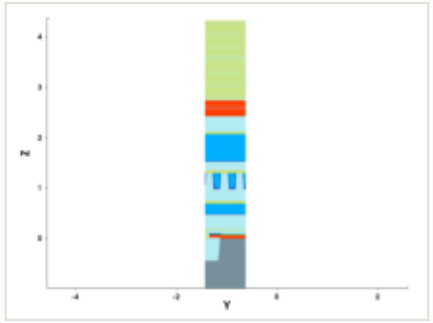


y cut at -1.035 µm

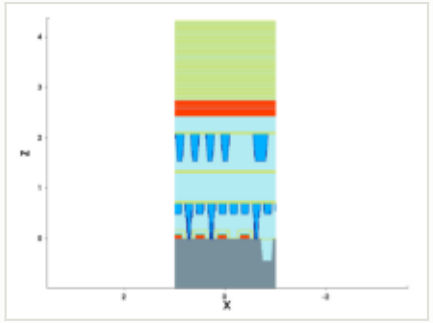


mask for this step

no mask for this step


steps by process area



materials deposited (g)

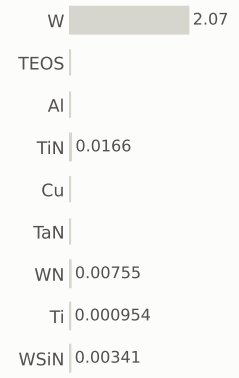

gases emitted (g)




Step #3010: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	226.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

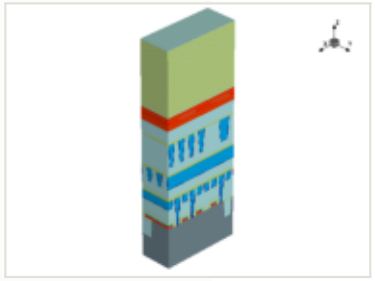




x cut at 0.000 µm

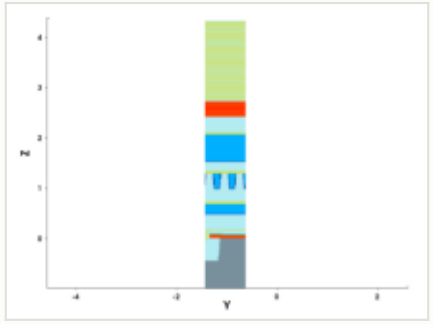

y cut at -1.035 µm

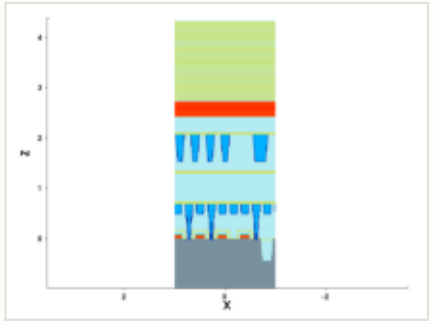


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

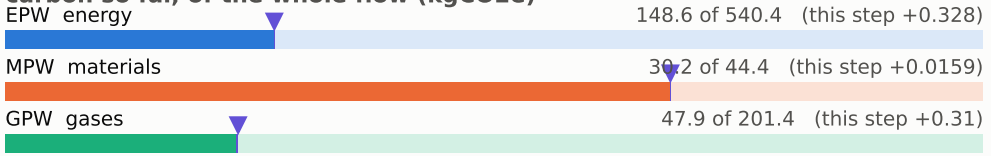

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

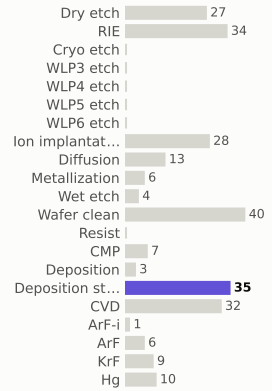

materials deposited (g)



gases emitted (g)

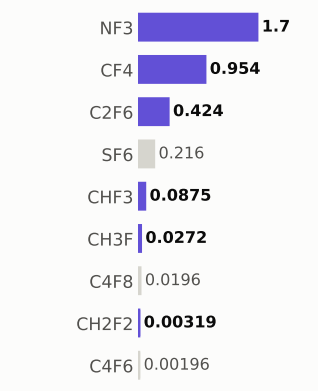


Step #3020: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	227.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

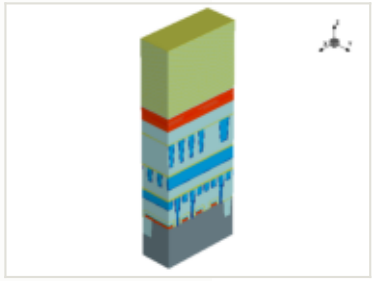



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 148.9 of 540.4 (this step +0.328)


MPW materials — 30.2 of 44.4 (this step +0.0159)

GPW gases — 48.2 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

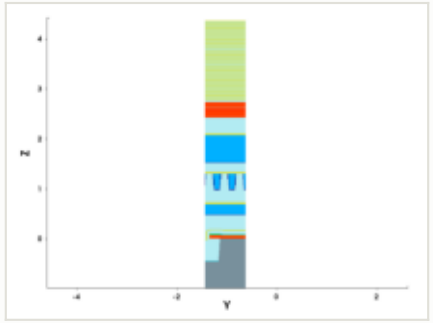


y cut at -1.035 µm

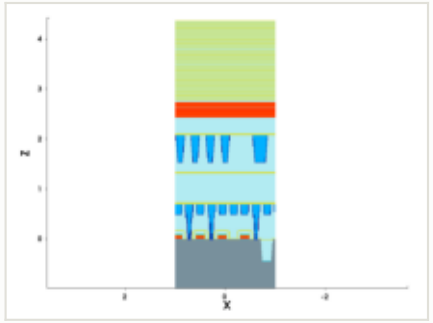


mask for this step

no mask for this step


steps by process area

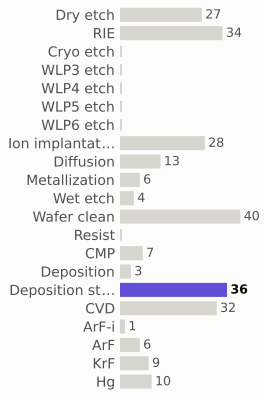

materials deposited (g)

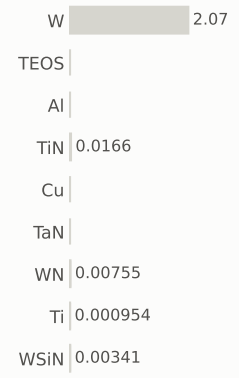

gases emitted (g)




Step #3030: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	228.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

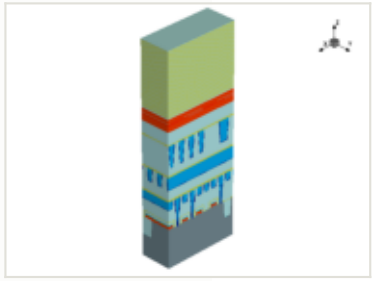



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 149.3 of 540.4 (this step +0.328)


MPW materials — 30.3 of 44.4 (this step +0.0159)

GPW gases — 48.6 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

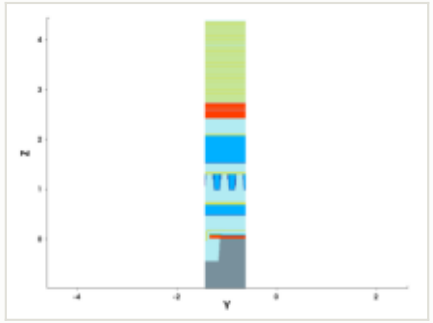


y cut at -1.035 µm

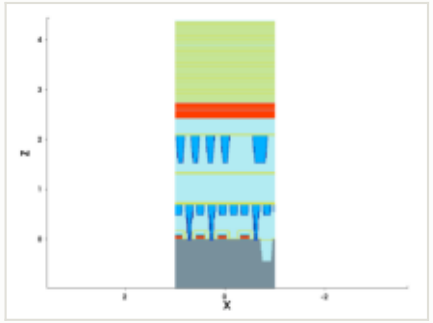


mask for this step

no mask for this step


steps by process area

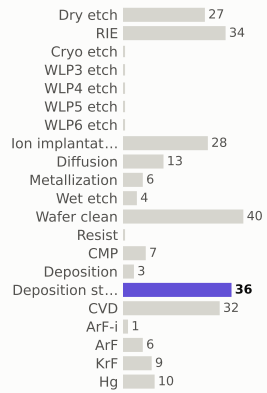

materials deposited (g)

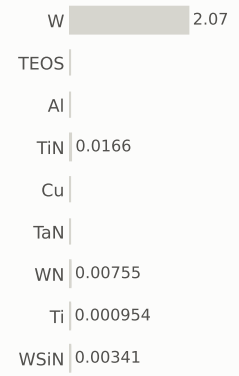

gases emitted (g)




Step #3040: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	228.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

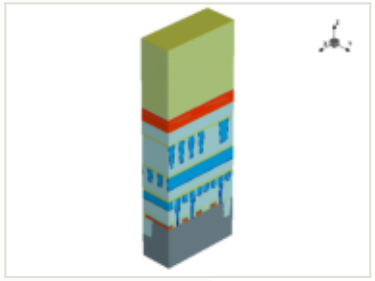



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 149.6 of 540.4 (this step +0.328)


MPW materials — 30.3 of 44.4 (this step +0.0159)

GPW gases — 48.9 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

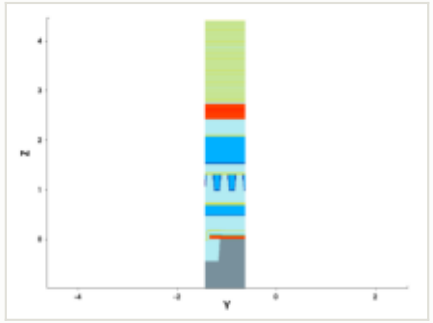


y cut at -1.035 µm

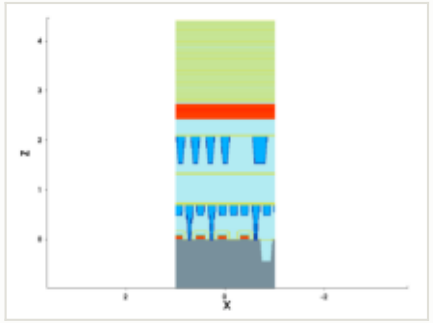


mask for this step

no mask for this step


steps by process area

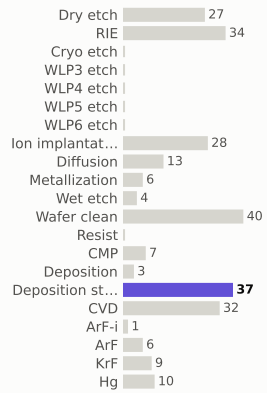

materials deposited (g)

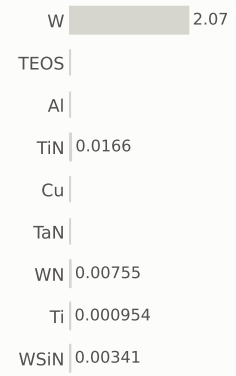

gases emitted (g)




Step #3050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	229.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

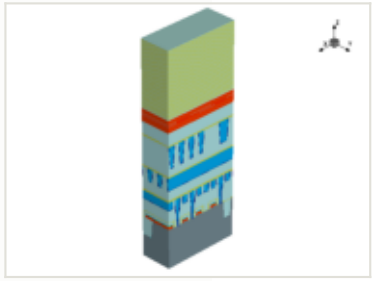




x cut at 0.000 µm

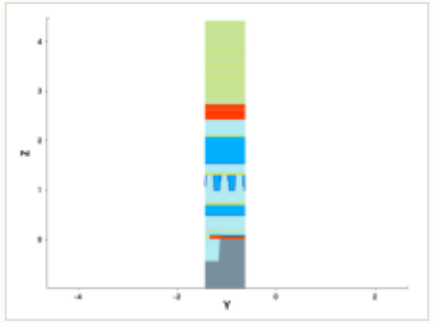

y cut at -1.035 µm

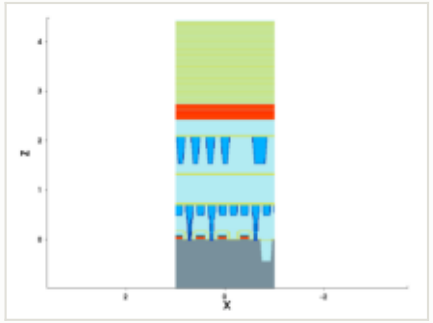


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

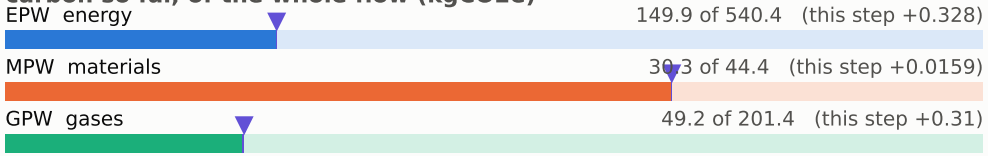

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

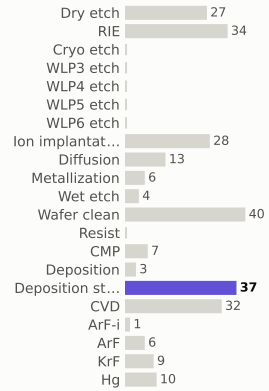

materials deposited (g)



gases emitted (g)




Step #3060: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	230.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

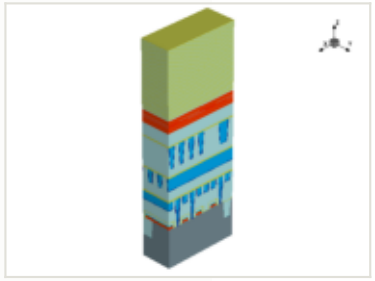



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 150.2 of 540.4 (this step +0.328)


MPW materials — 30.3 of 44.4 (this step +0.0159)

GPW gases — 49.5 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

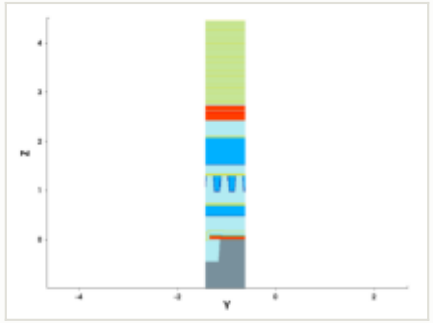


y cut at -1.035 µm

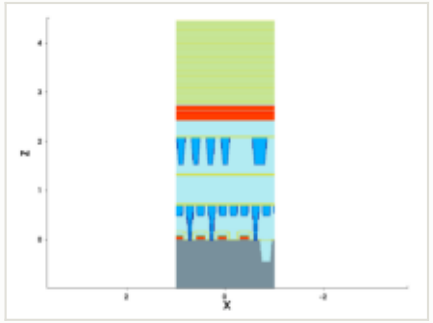


mask for this step

no mask for this step


steps by process area

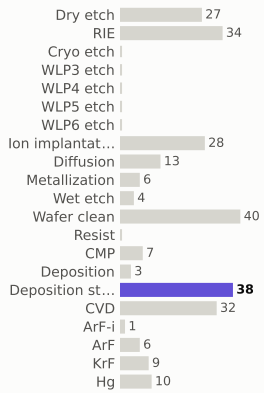

materials deposited (g)

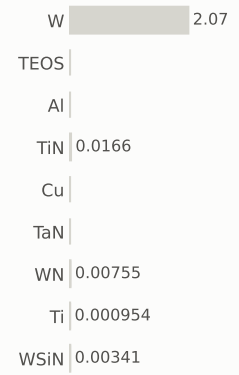

gases emitted (g)




Step #3070: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	230.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

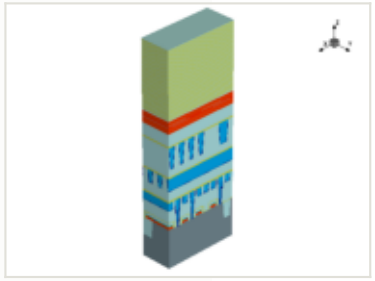




x cut at 0.000 µm

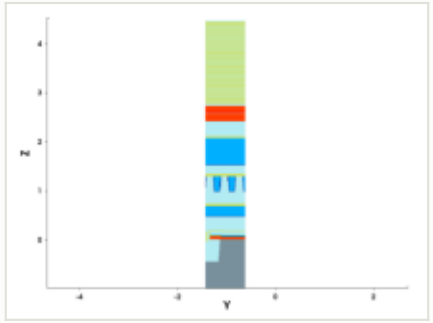

y cut at -1.035 µm

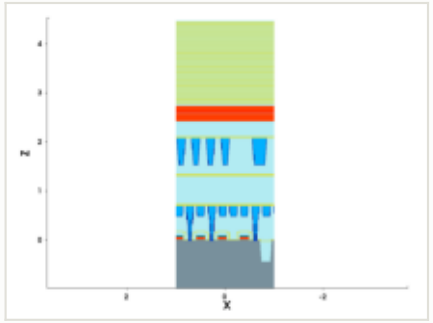


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

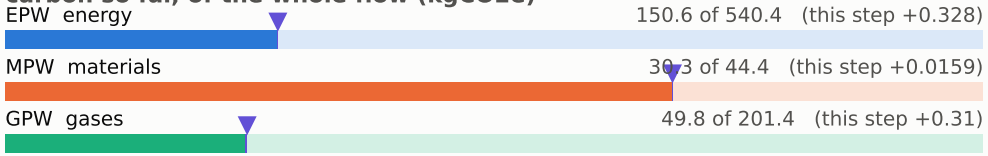


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

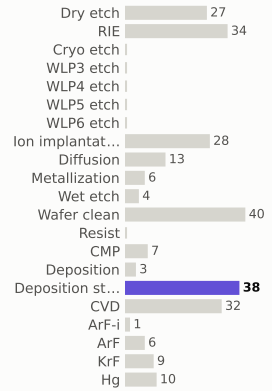

materials deposited (g)

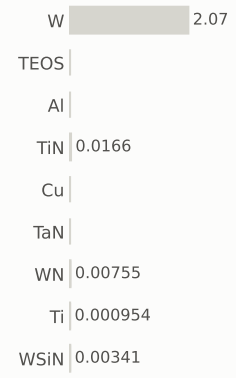

gases emitted (g)

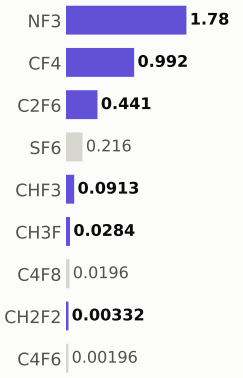


Step #3080: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	231.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

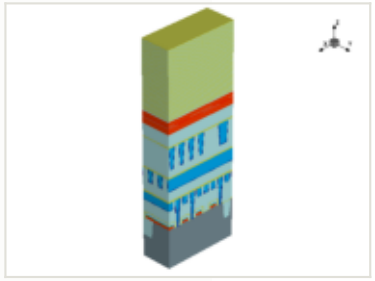



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 150.9 of 540.4 (this step +0.328)


MPW materials — 30.3 of 44.4 (this step +0.0159)

GPW gases — 50.1 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

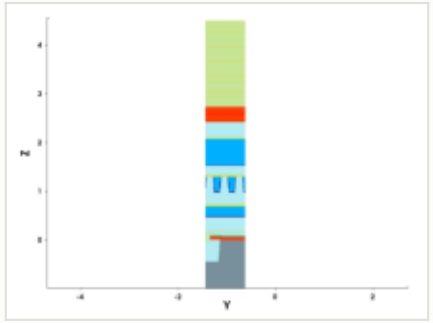


y cut at -1.035 µm

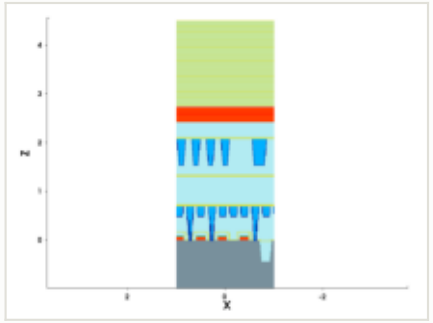


mask for this step

no mask for this step


steps by process area

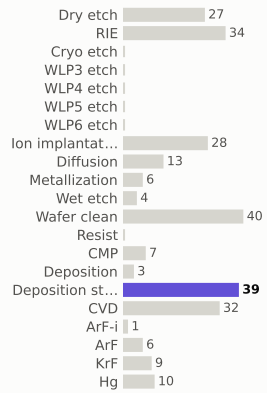

materials deposited (g)

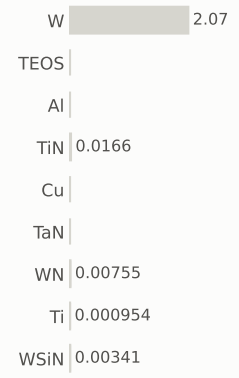

gases emitted (g)

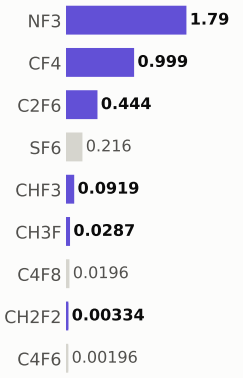


Step #3090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	232.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

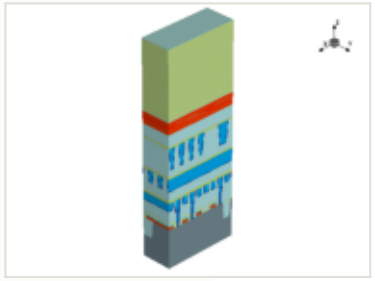

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 151.2 of 540.4 (this step +0.328)


MPW materials — 30.4 of 44.4 (this step +0.0159)

GPW gases — 50.4 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

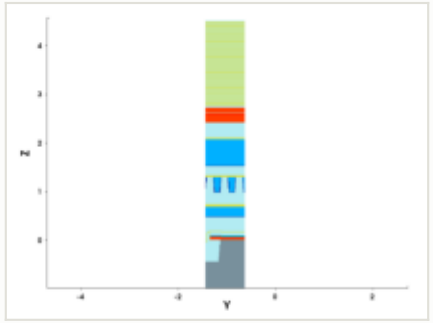


y cut at -1.035 µm

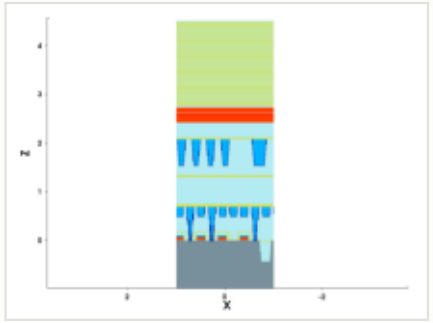


mask for this step

no mask for this step


steps by process area

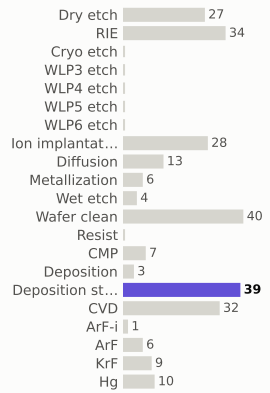

materials deposited (g)

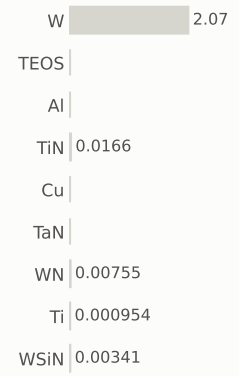

gases emitted (g)




Step #3100: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	232.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

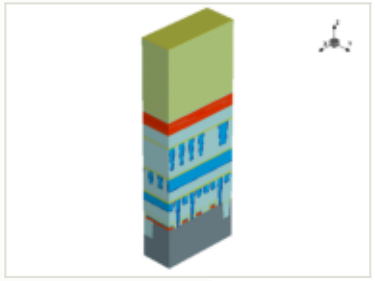




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

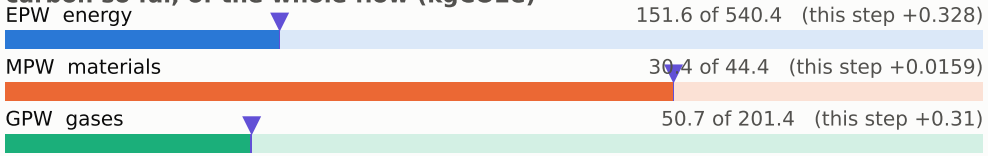


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

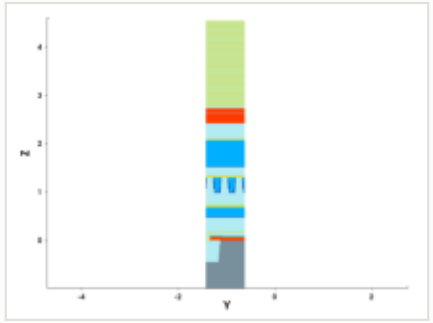


y cut at -1.035 µm

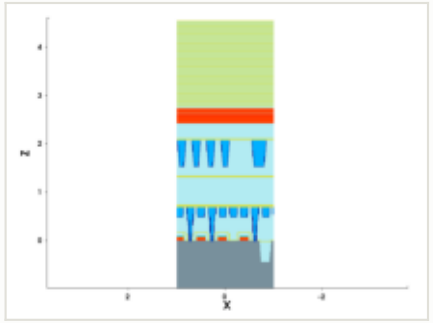

mask for this step

no mask for this step


steps by process area

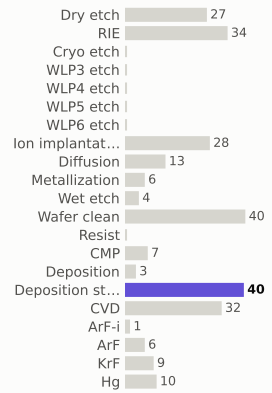

materials deposited (g)



gases emitted (g)




Step #3110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	233.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

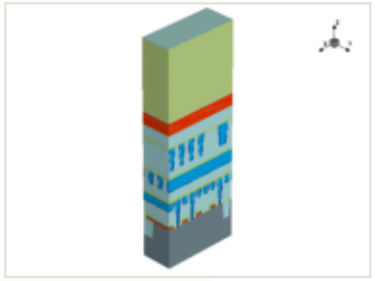






this step

process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

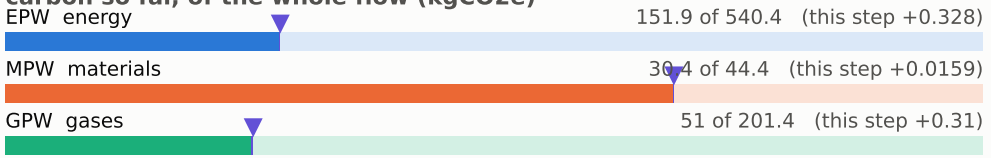


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

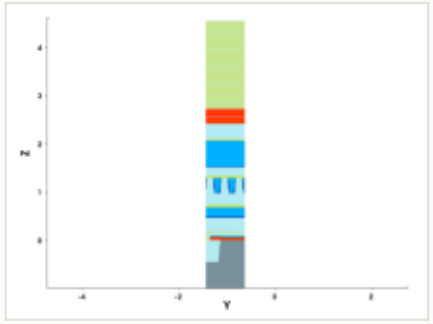


y cut at -1.035 µm

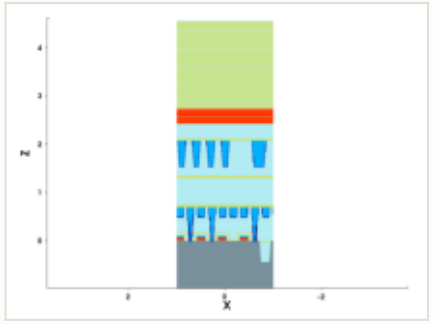

mask for this step

no mask for this step


steps by process area

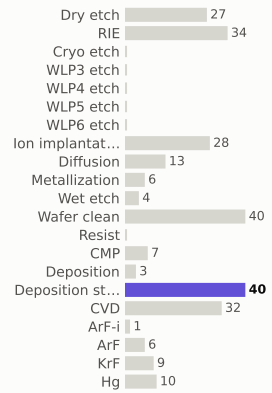

materials deposited (g)



gases emitted (g)




Step #3120: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	234.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

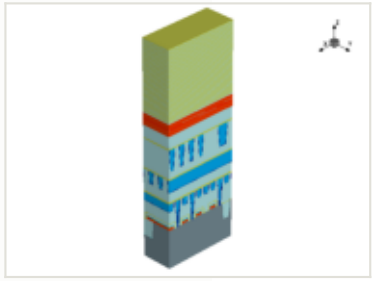



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 152.2 of 540.4 (this step +0.328)


MPW materials — 30.4 of 44.4 (this step +0.0159)

GPW gases — 51.3 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

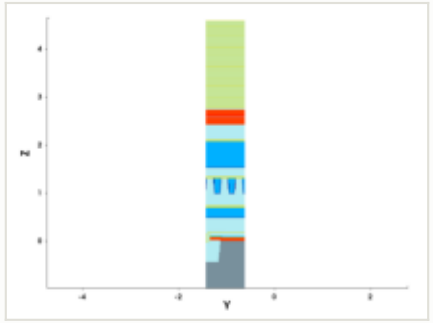


y cut at -1.035 µm

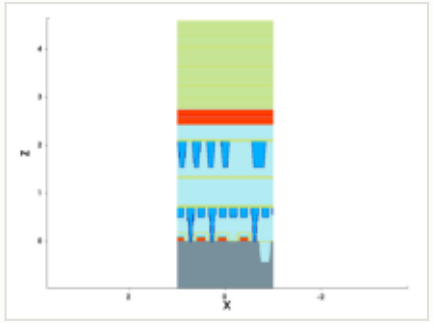


mask for this step

no mask for this step


steps by process area

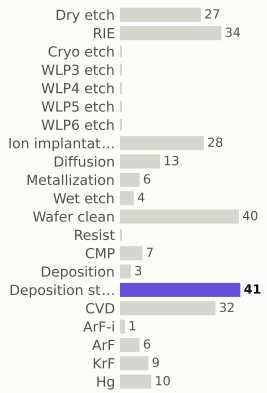

materials deposited (g)

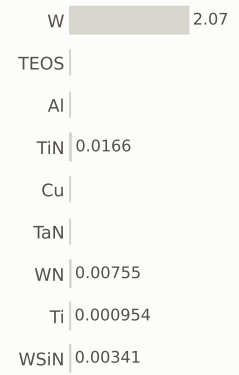

gases emitted (g)




Step #3130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	234.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

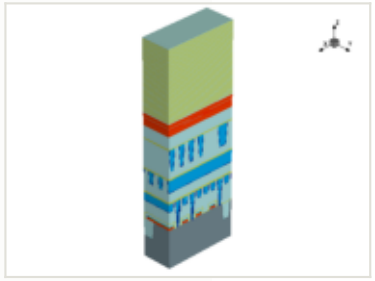



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 152.5 of 540.4 (this step +0.328)


MPW materials — 30.4 of 44.4 (this step +0.0159)

GPW gases — 51.7 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

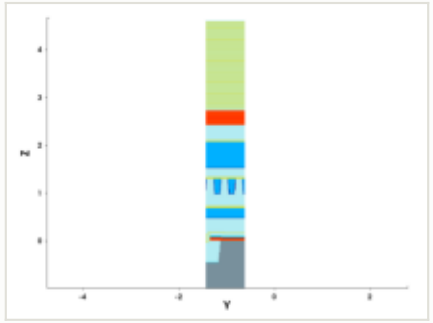


y cut at -1.035 µm

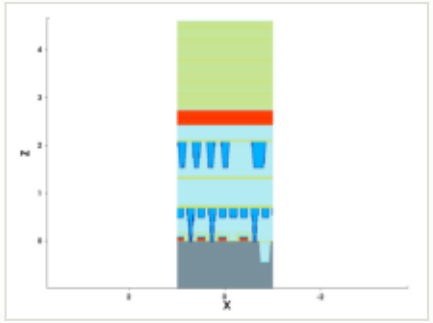


mask for this step

no mask for this step


steps by process area

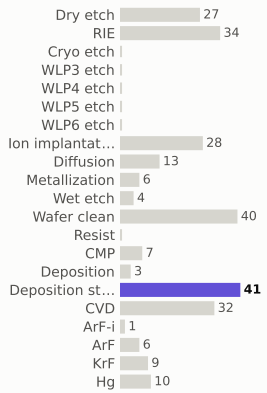

materials deposited (g)

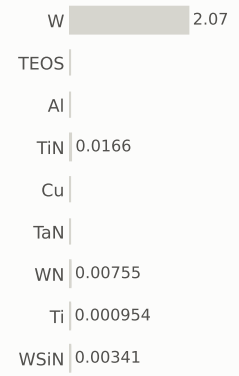

gases emitted (g)




Step #3140: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	235.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

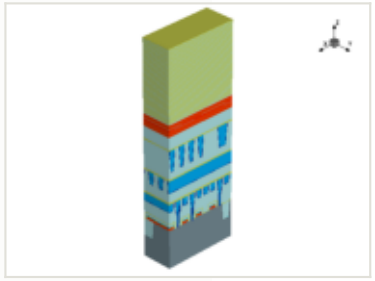




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

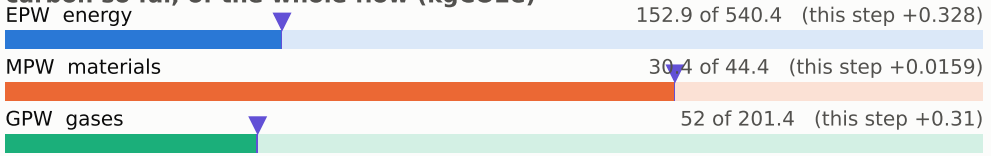


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

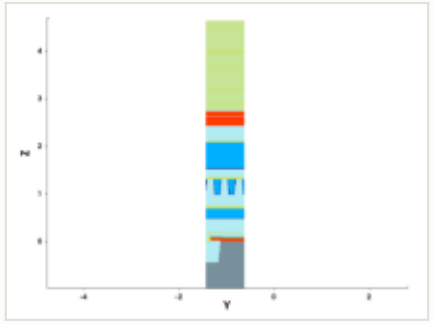


y cut at -1.035 µm

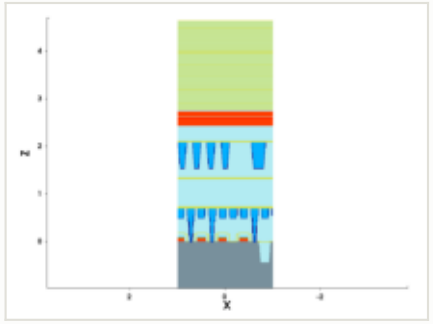

mask for this step

no mask for this step


steps by process area

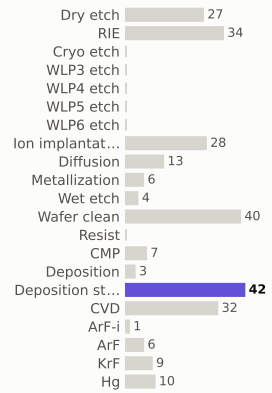

materials deposited (g)



gases emitted (g)




Step #3150: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	235.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

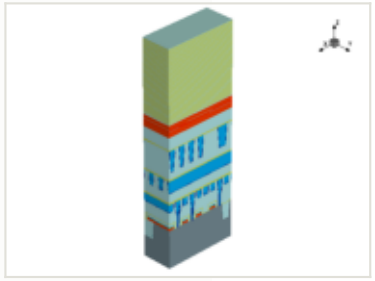



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 153.2 of 540.4 (this step +0.328)


MPW materials — 30.4 of 44.4 (this step +0.0159)

GPW gases — 52.3 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

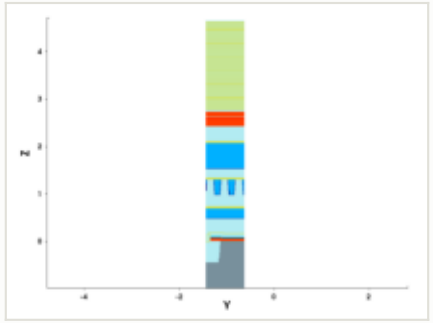


y cut at -1.035 µm

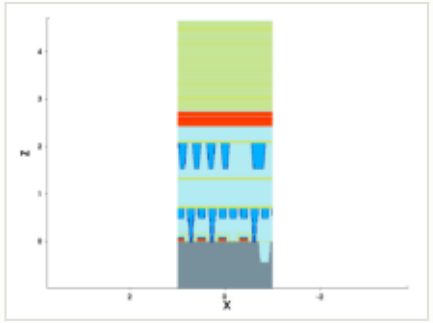


mask for this step

no mask for this step


steps by process area

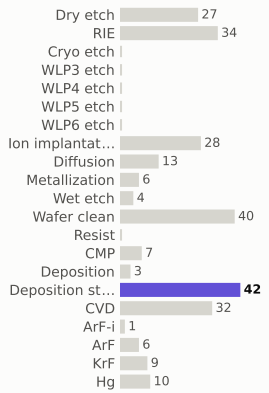

materials deposited (g)

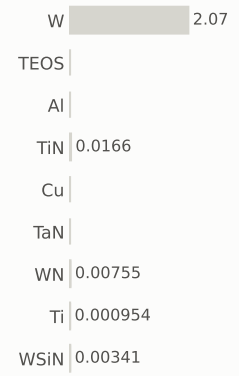

gases emitted (g)




Step #3160: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	236.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

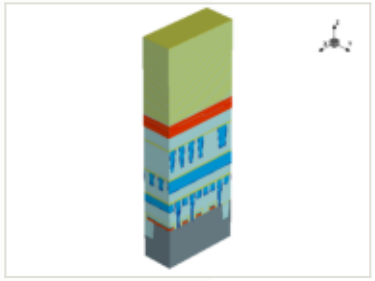




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

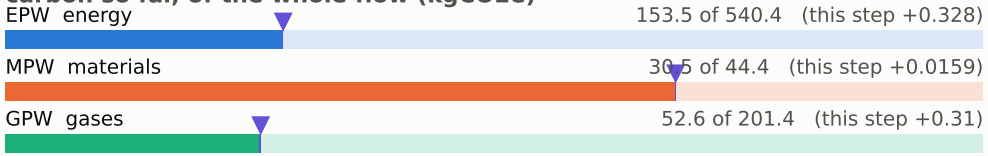


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

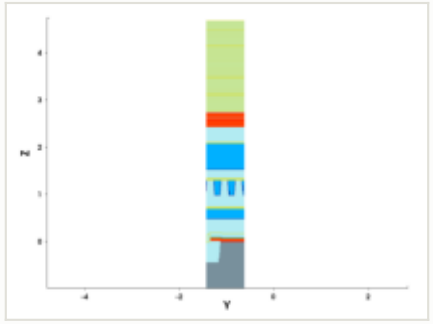


y cut at -1.035 µm

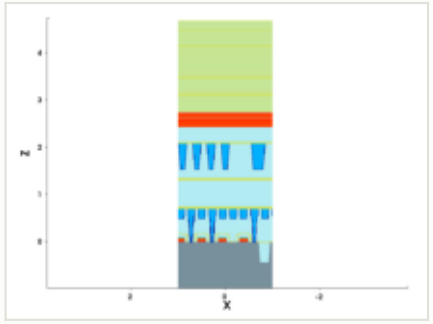

mask for this step

no mask for this step


steps by process area

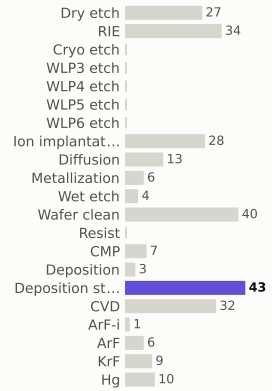

materials deposited (g)



gases emitted (g)




Step #3170: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	237.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

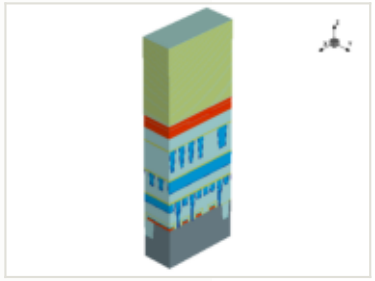




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

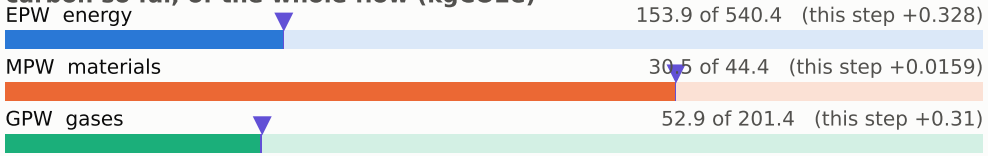


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

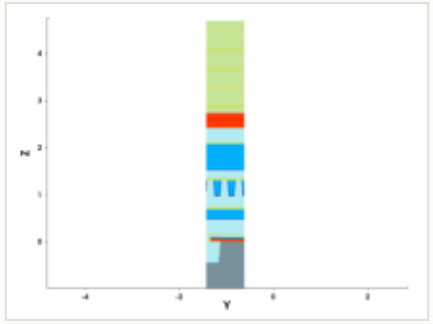


y cut at -1.035 µm

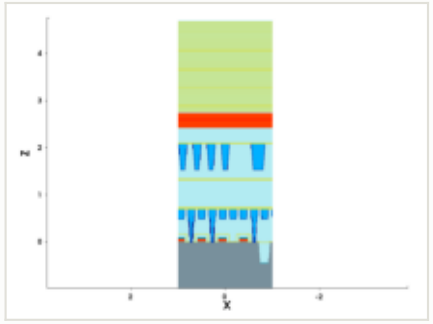

mask for this step

no mask for this step


steps by process area

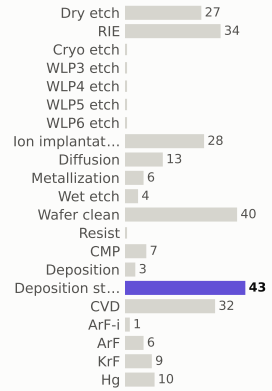

materials deposited (g)



gases emitted (g)




Step #3180: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	237.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

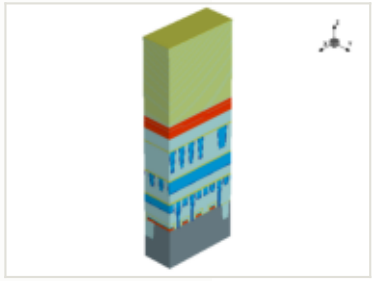




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

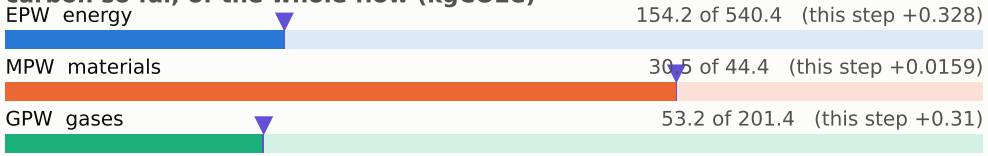


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

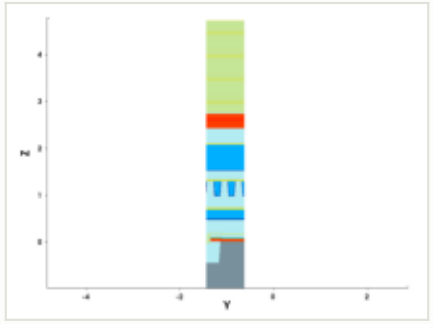


y cut at -1.035 µm

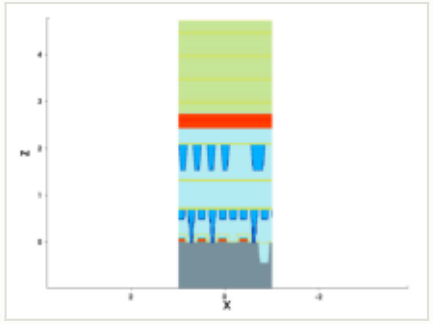

mask for this step

no mask for this step


steps by process area

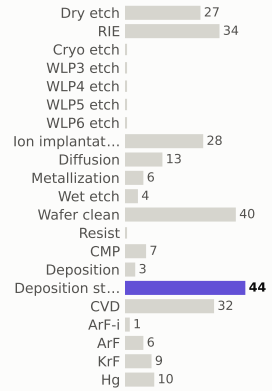

materials deposited (g)



gases emitted (g)




Step #3190: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	238.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

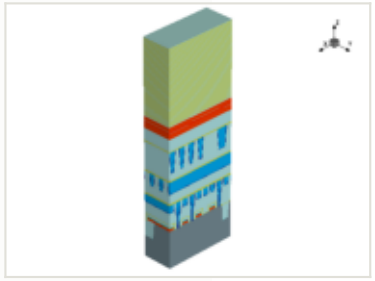




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

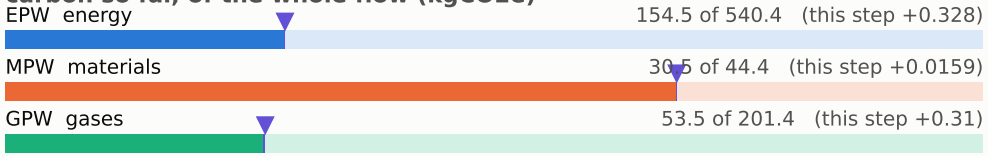


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

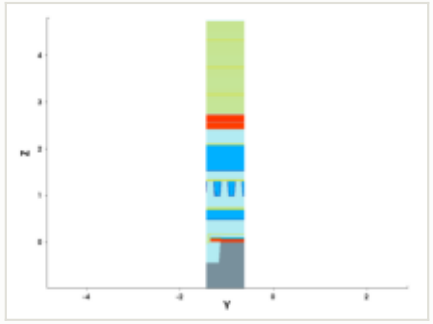


y cut at -1.035 µm

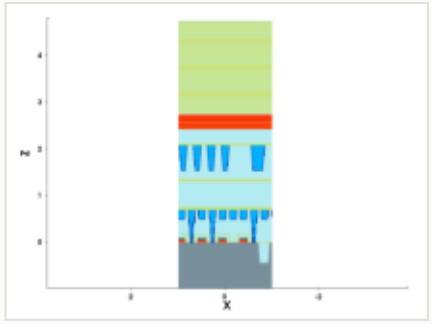

mask for this step

no mask for this step


steps by process area

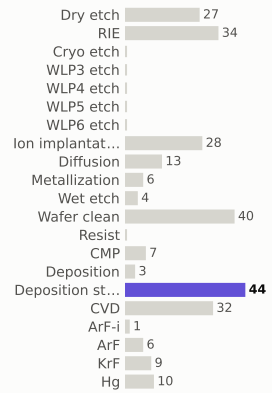

materials deposited (g)



gases emitted (g)




Step #3200: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	239.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

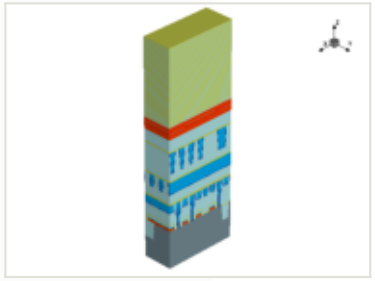




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

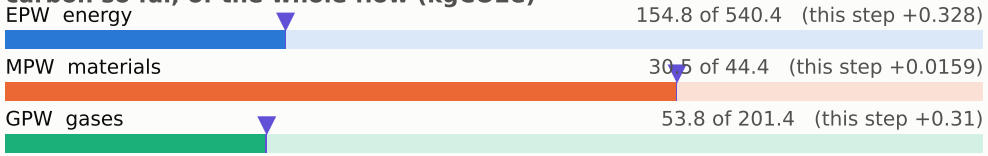


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

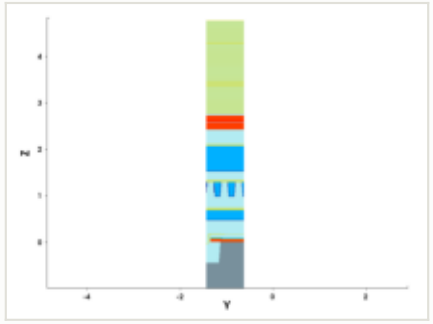


y cut at -1.035 µm

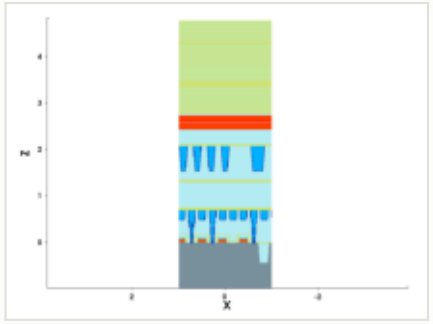

mask for this step

no mask for this step


steps by process area

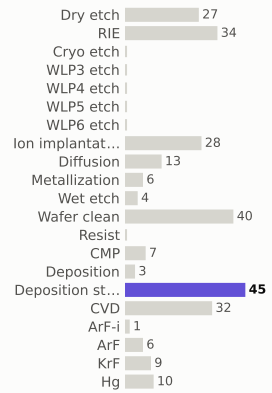

materials deposited (g)



gases emitted (g)




Step #3210: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	239.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

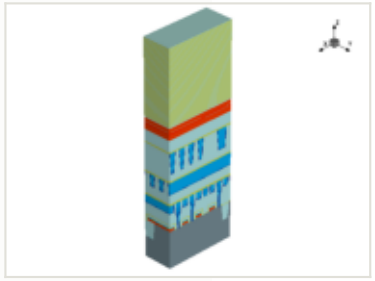




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

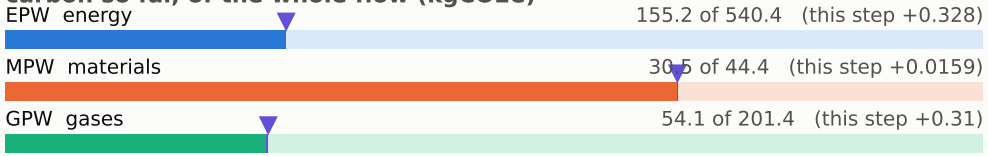


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

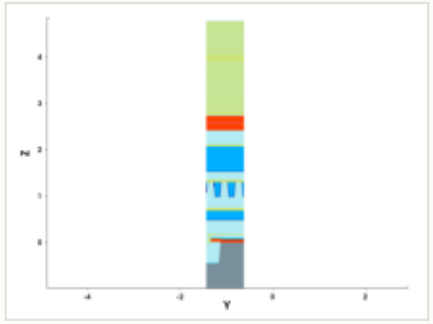


y cut at -1.035 µm

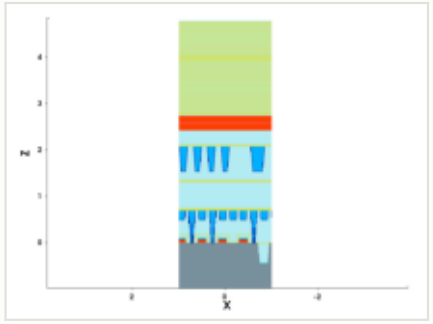

mask for this step

no mask for this step


steps by process area

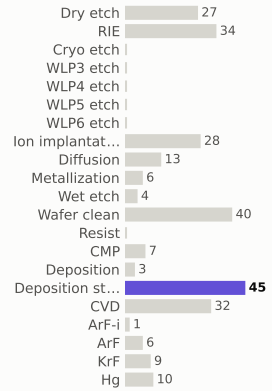

materials deposited (g)



gases emitted (g)




Step #3220: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	240.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

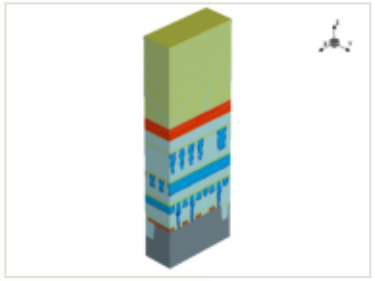



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 155.5 of 540.4 (this step +0.328)


MPW materials — 30.6 of 44.4 (this step +0.0159)

GPW gases — 54.4 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

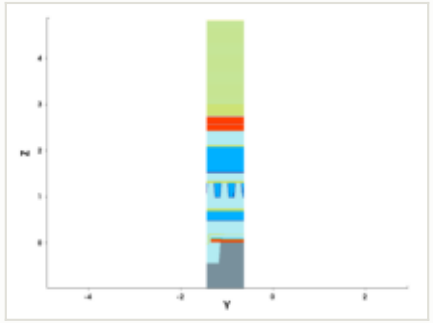


y cut at -1.035 µm

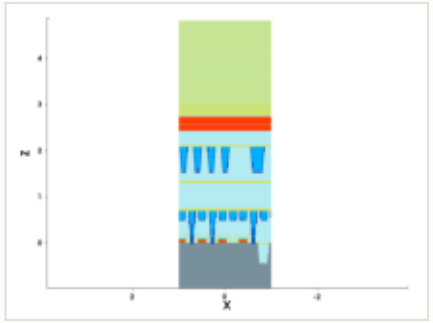

mask for this step

no mask for this step


steps by process area

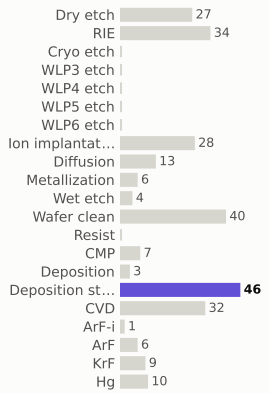

materials deposited (g)



gases emitted (g)




Step #3230: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	241.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

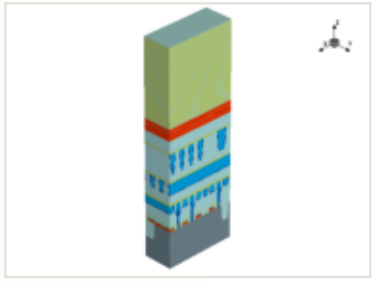



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 155.8 of 540.4 (this step +0.328)


MPW materials — 30.6 of 44.4 (this step +0.0159)

GPW gases — 54.8 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

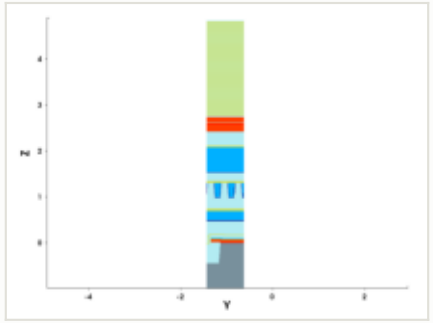


y cut at -1.035 µm

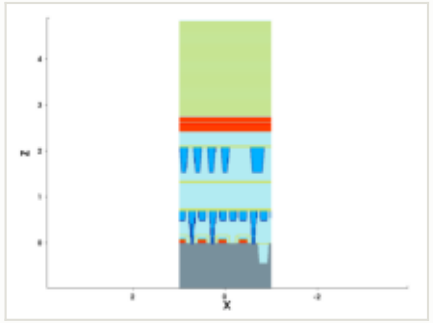


mask for this step

no mask for this step


steps by process area

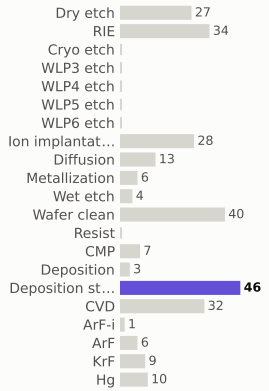

materials deposited (g)

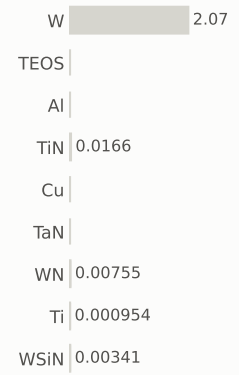

gases emitted (g)




Step #3240: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	241.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

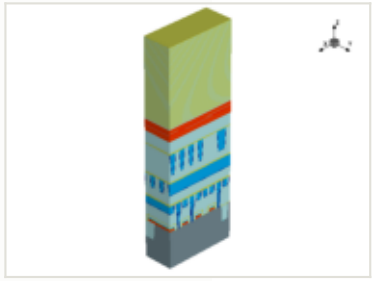

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 156.1 of 540.4 (this step +0.328)


MPW materials — 30.6 of 44.4 (this step +0.0159)

GPW gases — 55.1 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

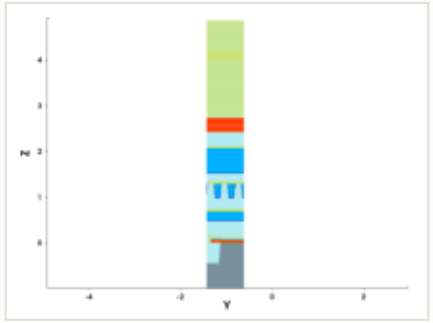


y cut at -1.035 µm

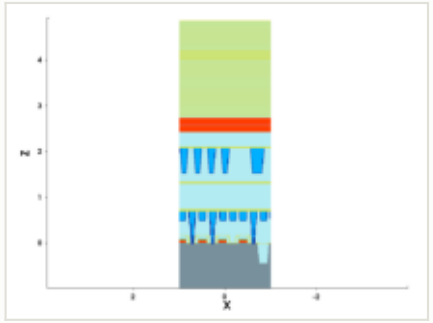


mask for this step

no mask for this step


steps by process area

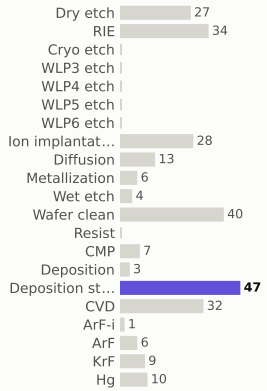

materials deposited (g)

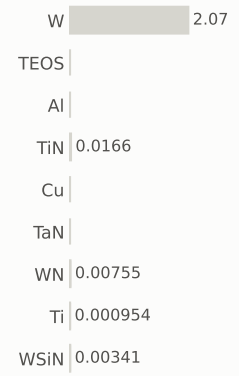

gases emitted (g)




Step #3250: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	242.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

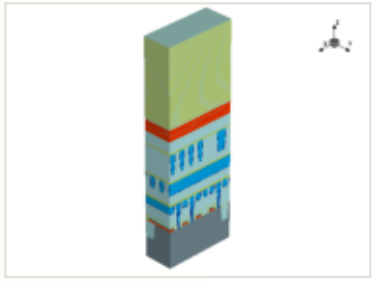





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

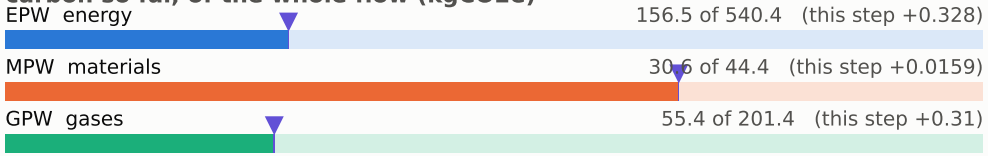


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

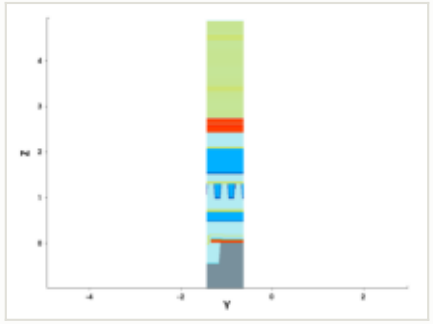


y cut at -1.035 µm

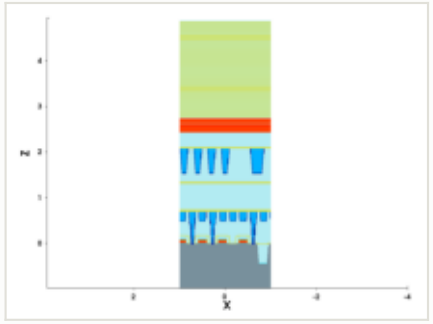

mask for this step

no mask for this step


steps by process area



materials deposited (g)



gases emitted (g)




Step #3260: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	243.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

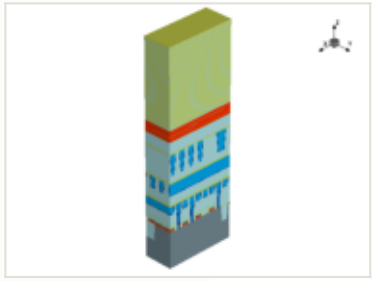



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 156.8 of 540.4 (this step +0.328)


MPW materials — 30.6 of 44.4 (this step +0.0159)

GPW gases — 55.7 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

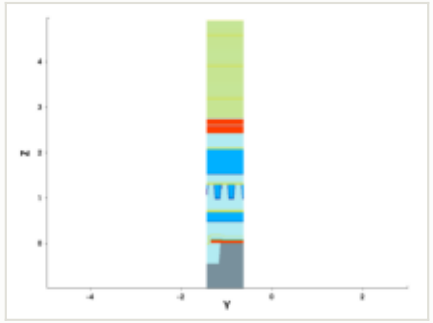


y cut at -1.035 µm

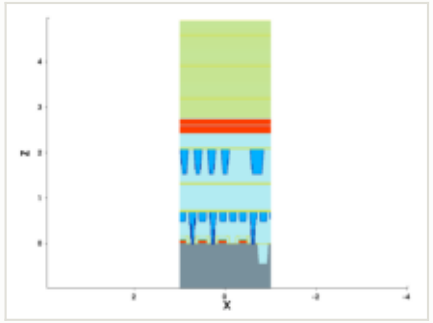


mask for this step

no mask for this step


steps by process area

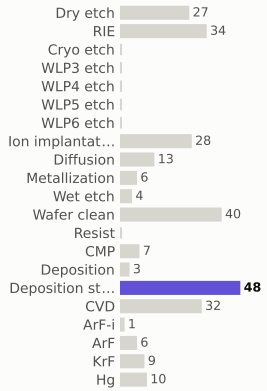

materials deposited (g)

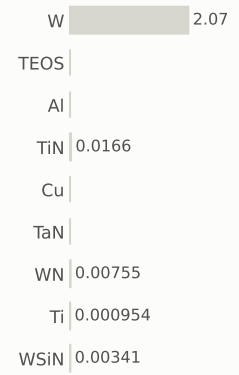

gases emitted (g)




Step #3270: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	243.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

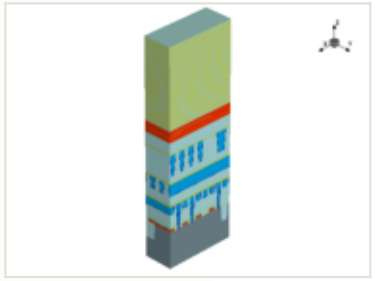



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 157.1 of 540.4 (this step +0.328)


MPW materials — 30.6 of 44.4 (this step +0.0159)

GPW gases — 56 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

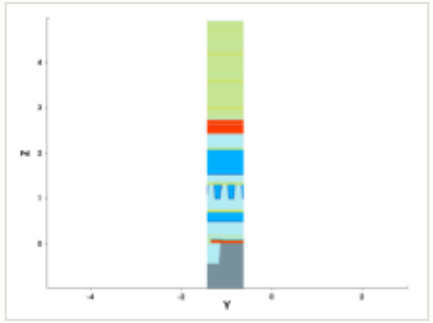


y cut at -1.035 µm

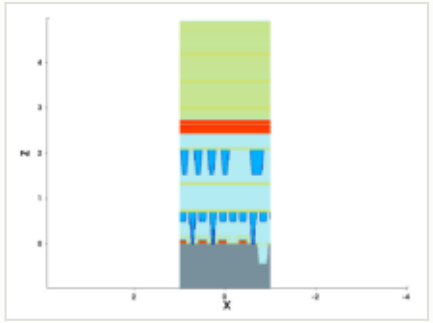


mask for this step

no mask for this step


steps by process area

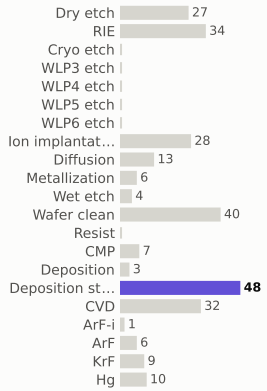

materials deposited (g)

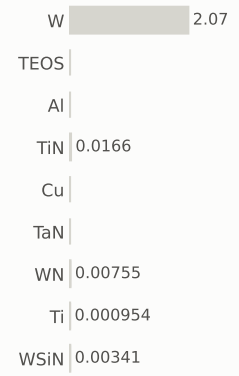

gases emitted (g)




Step #3280: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	244.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

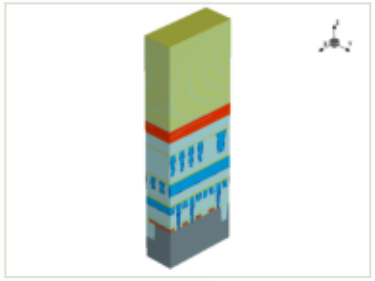




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

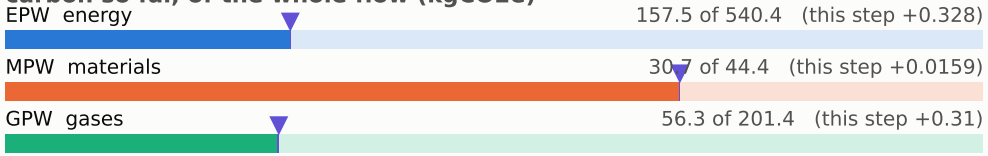


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

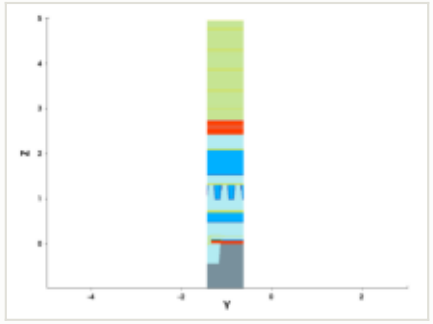


y cut at -1.035 µm

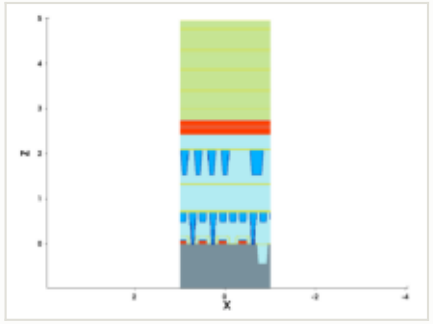


mask for this step

no mask for this step


steps by process area

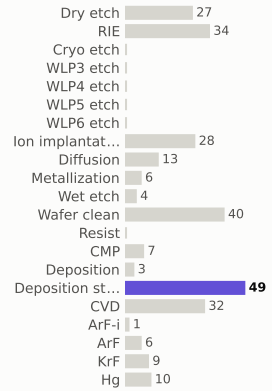

materials deposited (g)

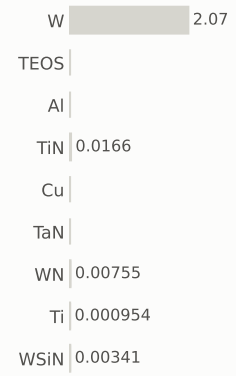

gases emitted (g)

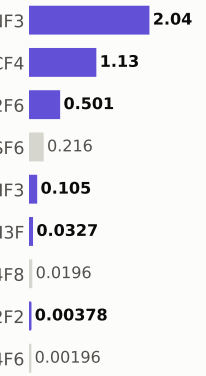


Step #3290: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	245.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

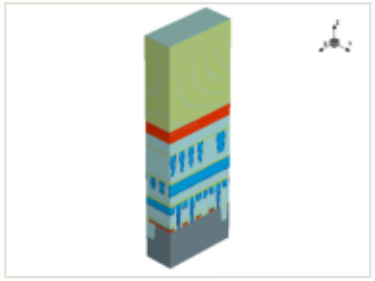



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 157.8 of 540.4 (this step +0.328)


MPW materials — 30.7 of 44.4 (this step +0.0159)

GPW gases — 56.6 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

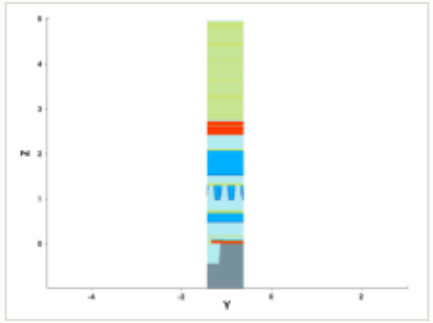


y cut at -1.035 µm

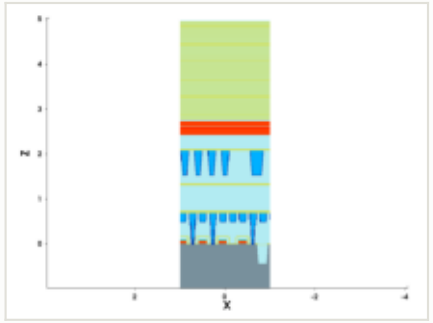


mask for this step

no mask for this step


steps by process area

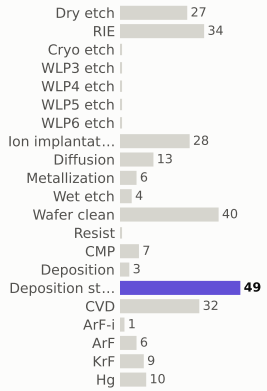

materials deposited (g)

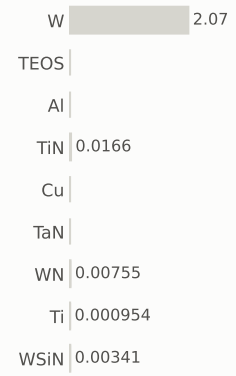

gases emitted (g)




Step #3300: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	245.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

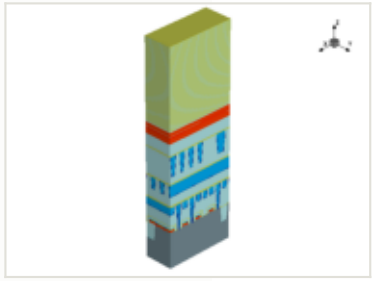



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 158.1 of 540.4 (this step +0.328)


MPW materials — 30.7 of 44.4 (this step +0.0159)

GPW gases — 56.9 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

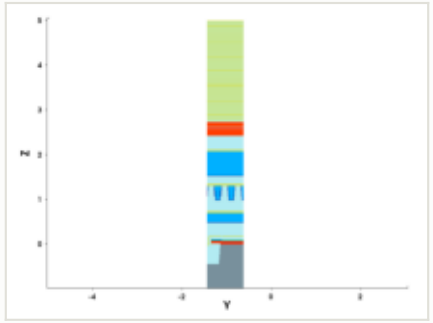


y cut at -1.035 µm

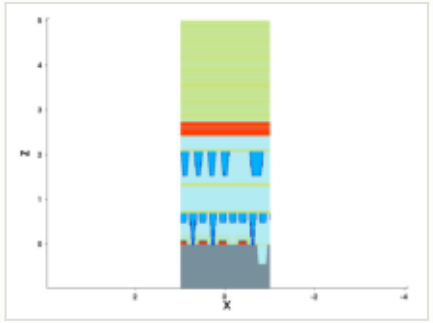


mask for this step

no mask for this step


steps by process area

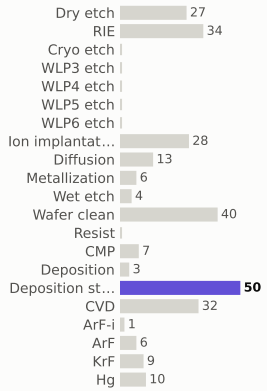

materials deposited (g)

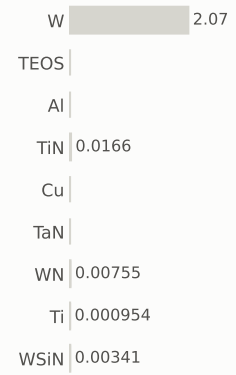

gases emitted (g)




Step #3310: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	246.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

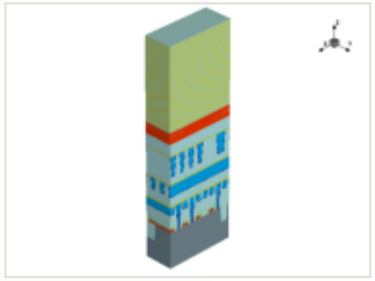




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

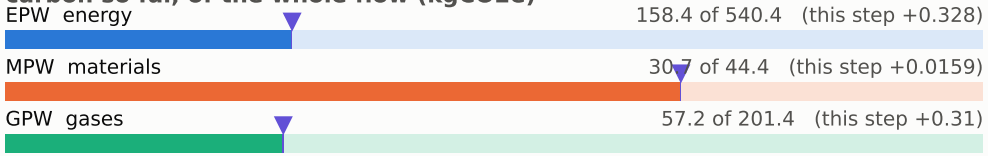


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

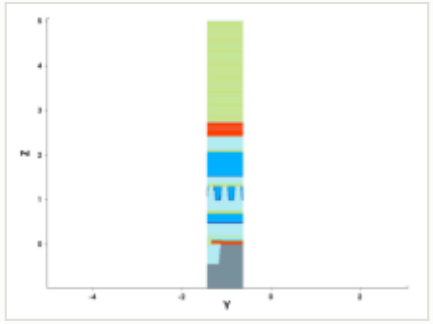


y cut at -1.035 µm

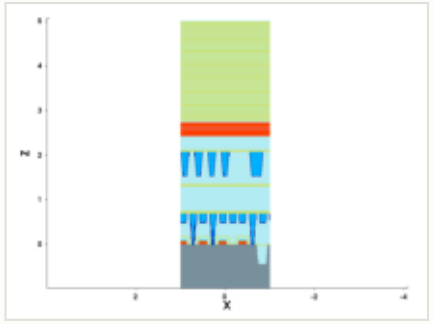


mask for this step

no mask for this step


steps by process area

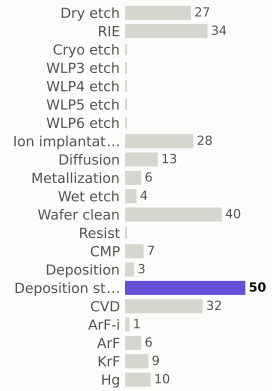

materials deposited (g)

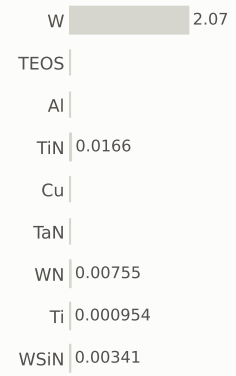

gases emitted (g)




Step #3320: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	247.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

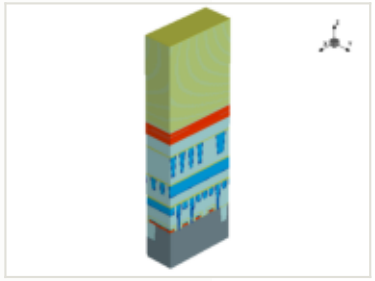



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 158.8 of 540.4 (this step +0.328)


MPW materials — 30.7 of 44.4 (this step +0.0159)

GPW gases — 57.5 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

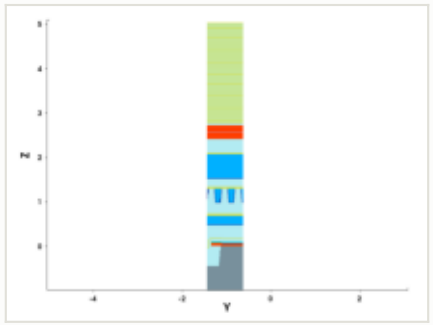


y cut at -1.035 µm

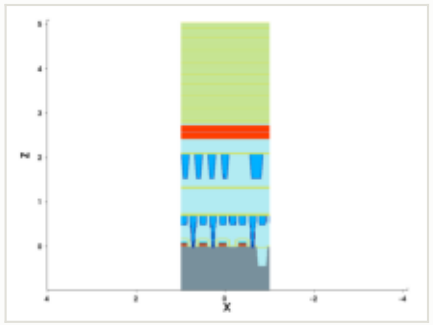


mask for this step

no mask for this step


steps by process area

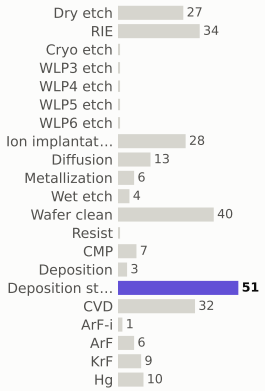

materials deposited (g)

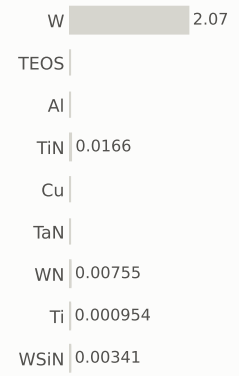

gases emitted (g)




Step #3330: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	247.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

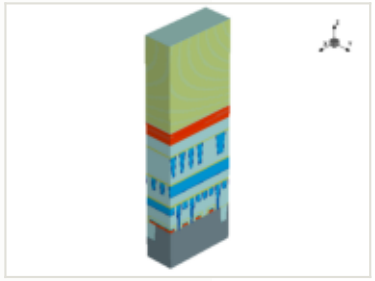



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 159.1 of 540.4 (this step +0.328)


MPW materials — 30.7 of 44.4 (this step +0.0159)

GPW gases — 57.9 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

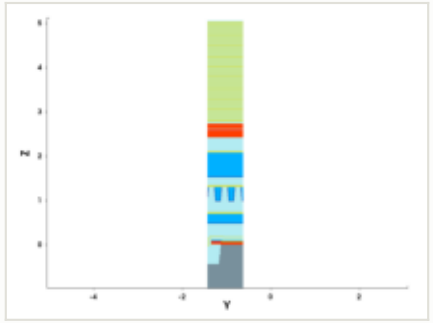


y cut at -1.035 µm

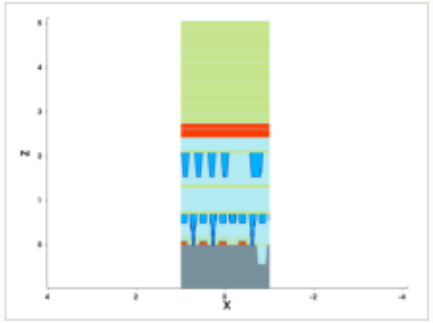


mask for this step

no mask for this step


steps by process area

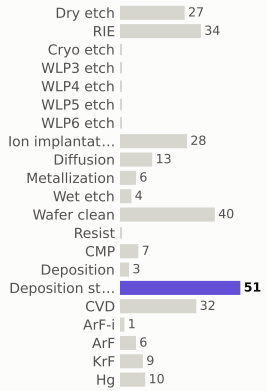

materials deposited (g)

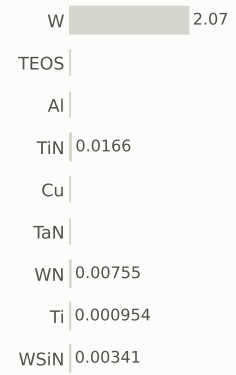

gases emitted (g)




Step #3340: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	248.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

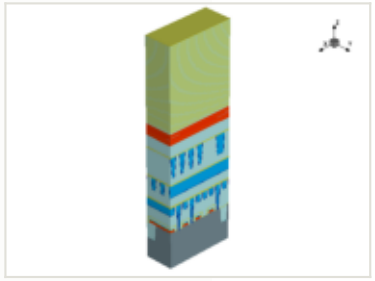



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 159.4 of 540.4 (this step +0.328)


MPW materials — 30.7 of 44.4 (this step +0.0159)

GPW gases — 58.2 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

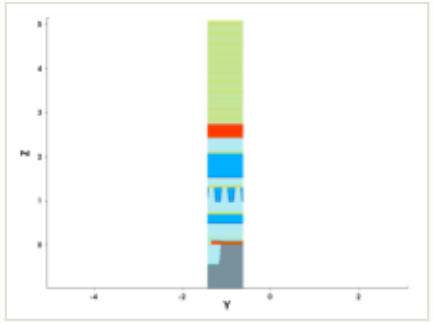


y cut at -1.035 µm

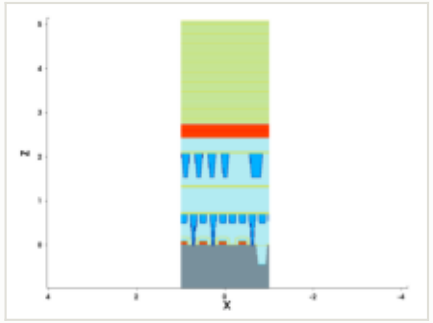


mask for this step

no mask for this step


steps by process area

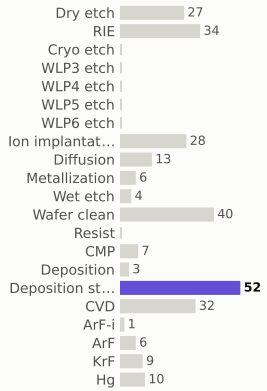

materials deposited (g)

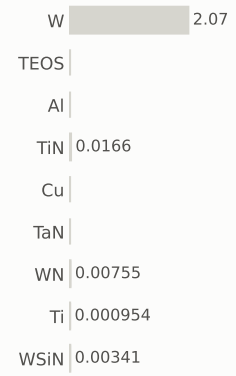

gases emitted (g)




Step #3350: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	249.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

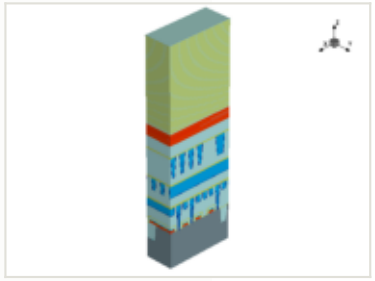




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

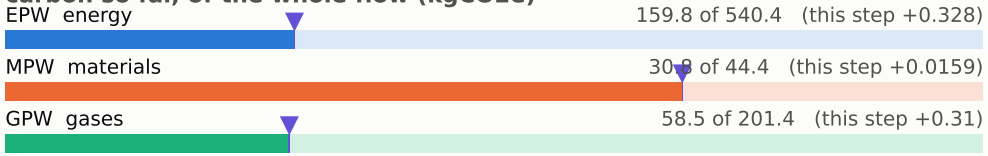


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

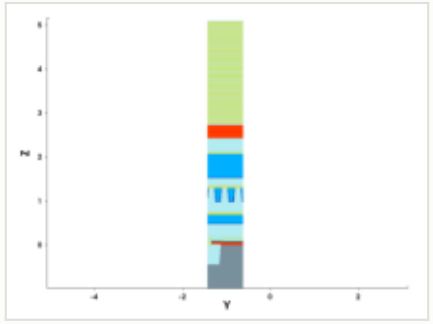


y cut at -1.035 µm

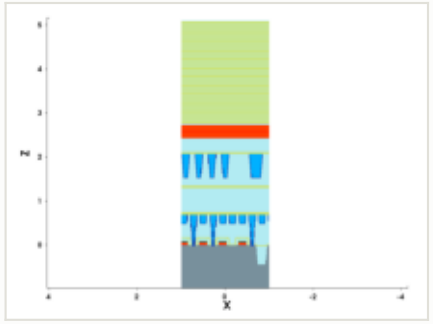


mask for this step

no mask for this step


steps by process area

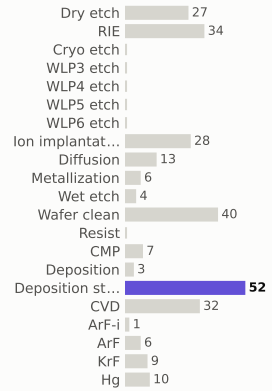

materials deposited (g)

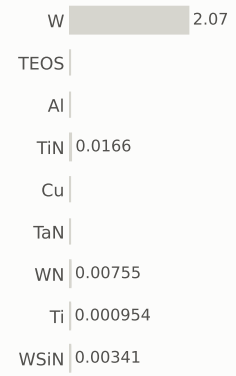

gases emitted (g)




Step #3360: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	249.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

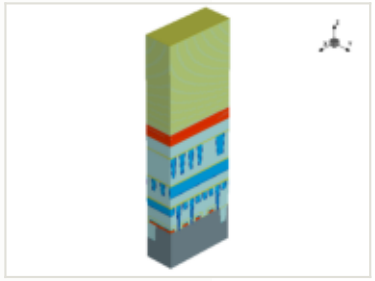




x cut at 0.000 µm

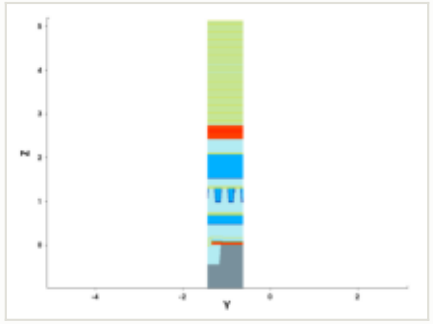

y cut at -1.035 µm

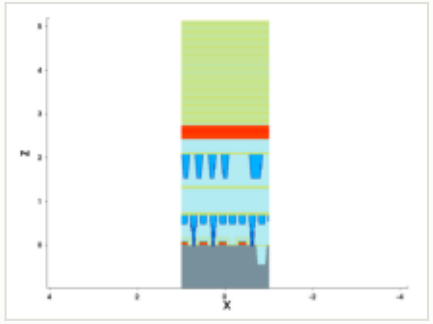


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

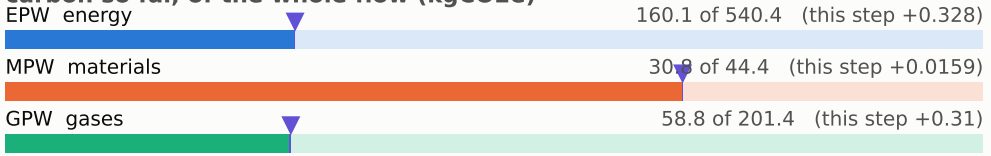

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

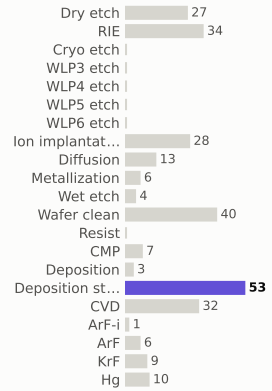

materials deposited (g)



gases emitted (g)




Step #3370: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	250.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

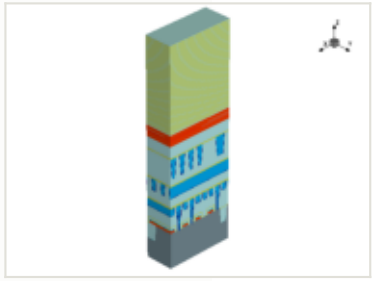




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

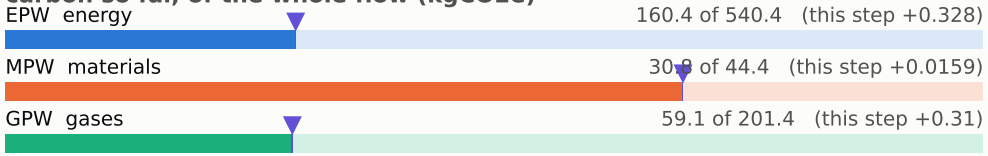


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

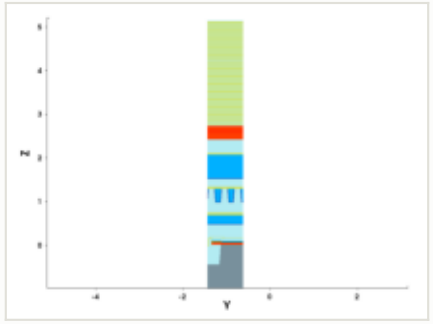


y cut at -1.035 µm

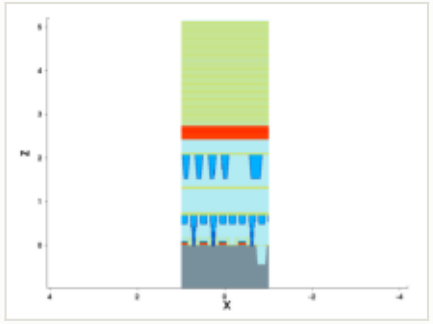


mask for this step

no mask for this step


steps by process area

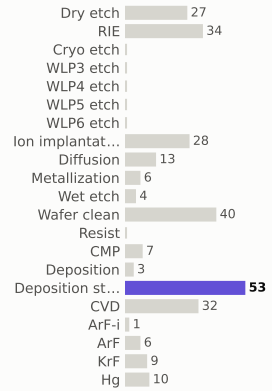

materials deposited (g)

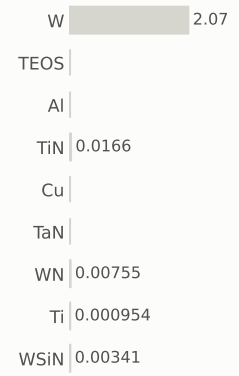

gases emitted (g)




Step #3380: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	251.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

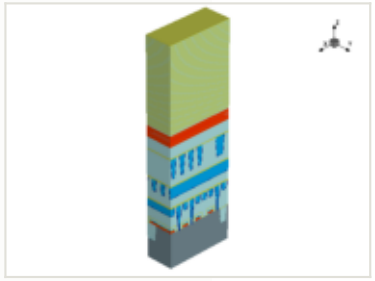



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 160.7 of 540.4 (this step +0.328)


MPW materials — 30.8 of 44.4 (this step +0.0159)

GPW gases — 59.4 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

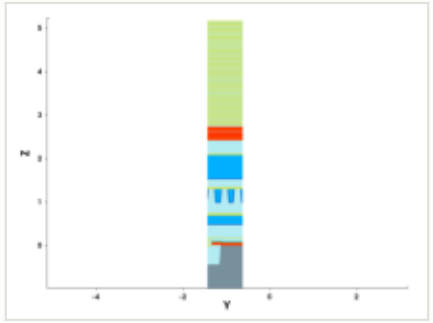


y cut at -1.035 µm

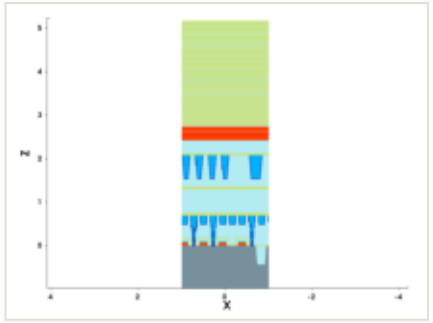


mask for this step

no mask for this step


steps by process area

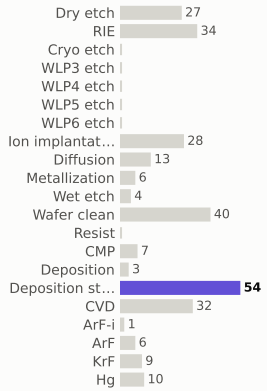

materials deposited (g)

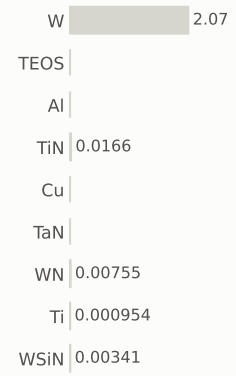

gases emitted (g)




Step #3390: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	251.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

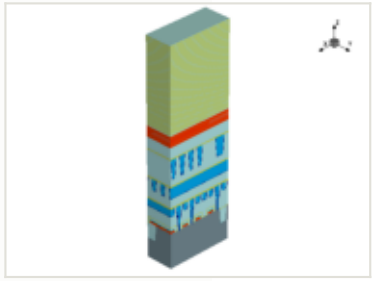




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

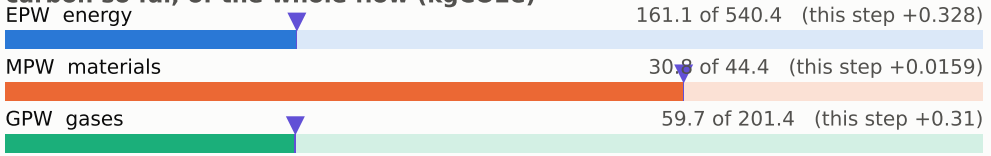


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

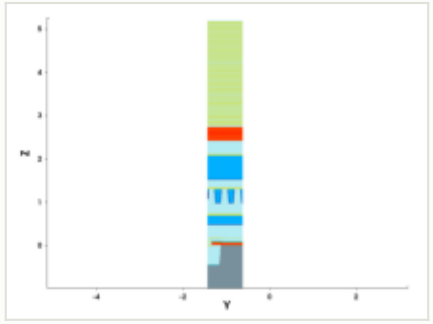


y cut at -1.035 µm

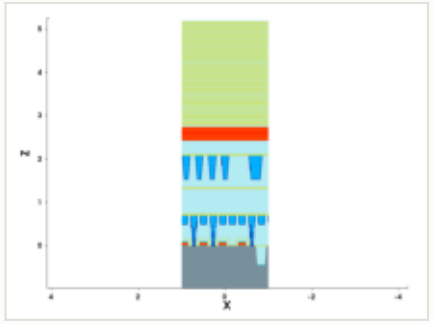


mask for this step

no mask for this step


steps by process area

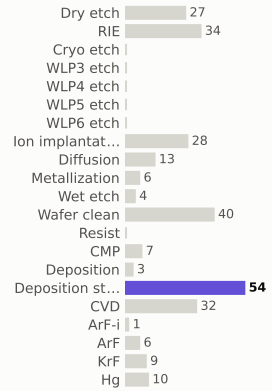

materials deposited (g)

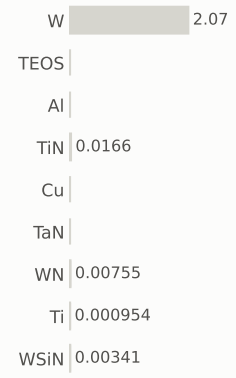

gases emitted (g)




Step #3400: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	252.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

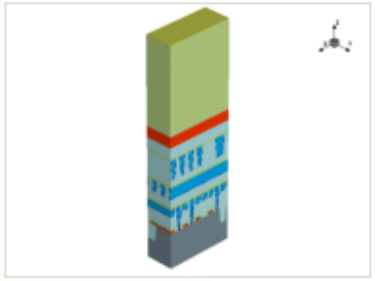




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

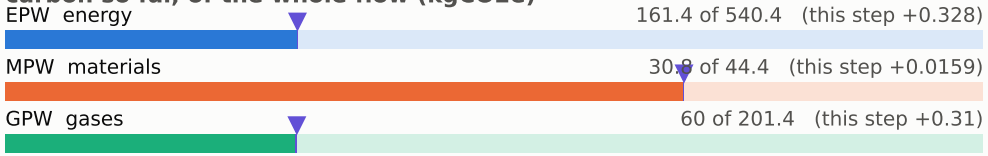


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

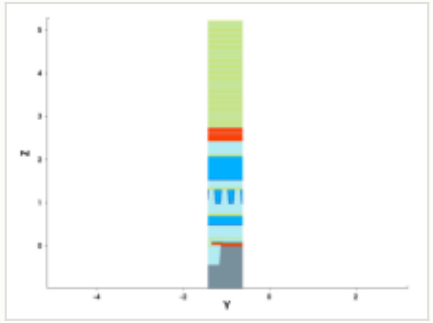


y cut at -1.035 µm

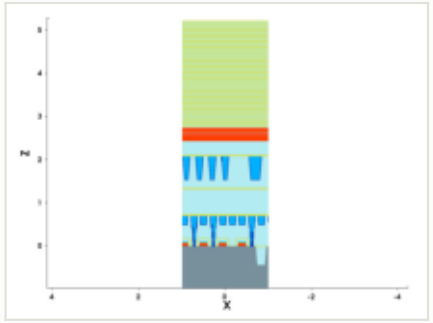

mask for this step

no mask for this step


steps by process area

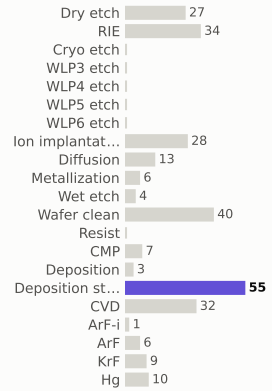

materials deposited (g)



gases emitted (g)




Step #3410: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	252.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

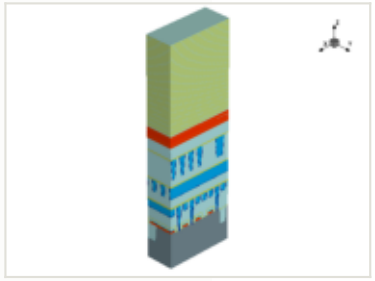




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

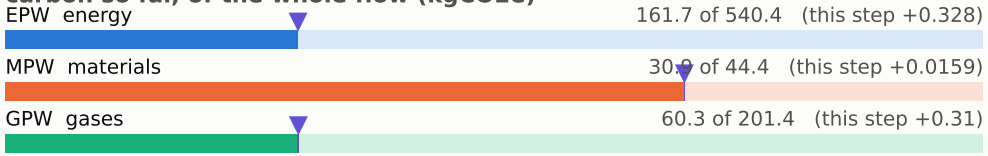


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

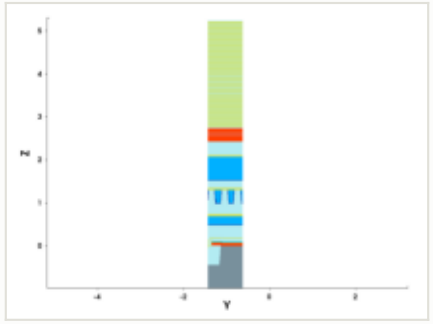


y cut at -1.035 µm

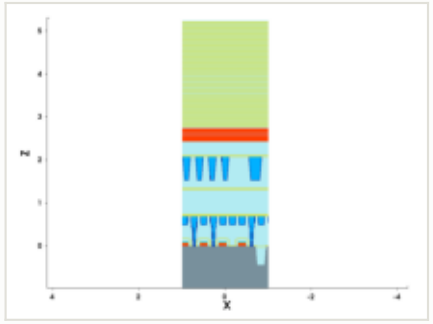

mask for this step

no mask for this step


steps by process area

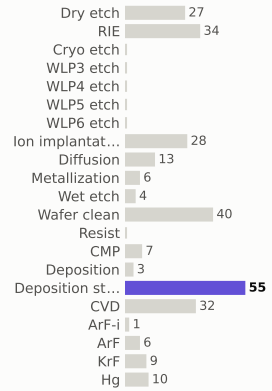

materials deposited (g)



gases emitted (g)




Step #3420: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	253.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

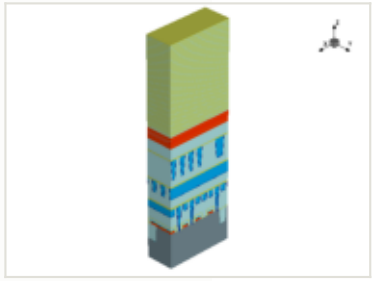



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 162.1 of 540.4 (this step +0.328)


MPW materials — 30.9 of 44.4 (this step +0.0159)

GPW gases — 60.6 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

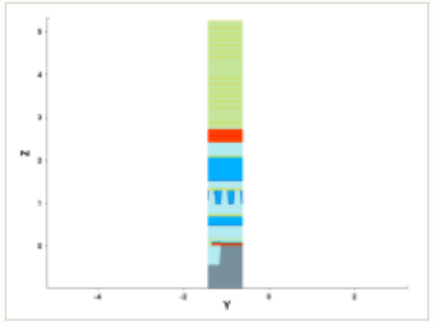


y cut at -1.035 µm

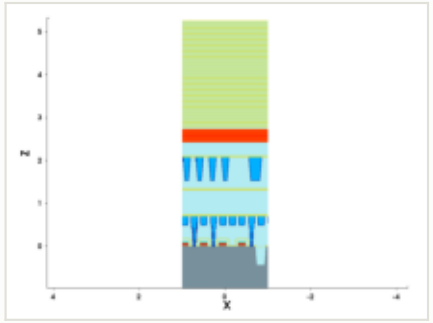


mask for this step

no mask for this step


steps by process area

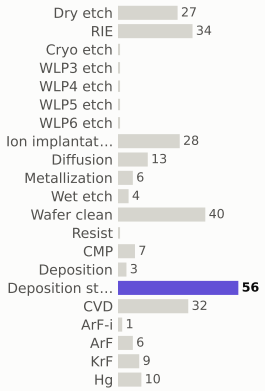

materials deposited (g)

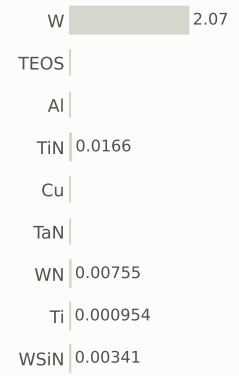

gases emitted (g)




Step #3430: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	254.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

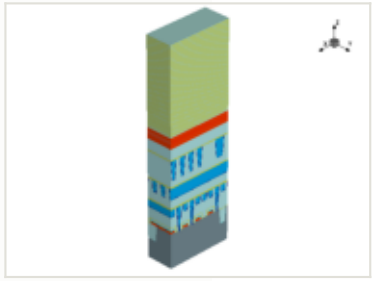



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 162.4 of 540.4 (this step +0.328)


MPW materials — 30.9 of 44.4 (this step +0.0159)

GPW gases — 61 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

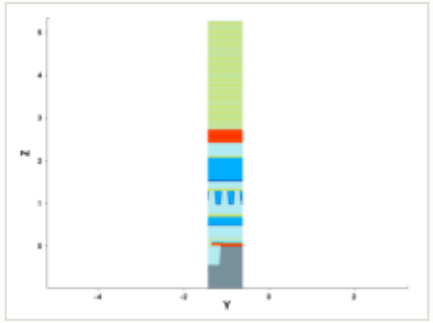


y cut at -1.035 µm

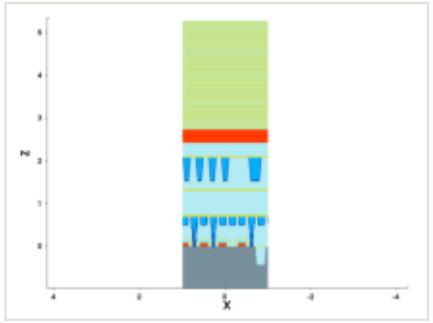


mask for this step

no mask for this step


steps by process area

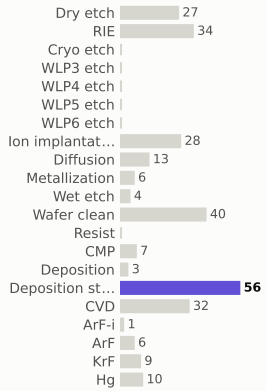

materials deposited (g)

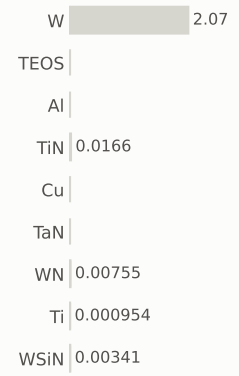

gases emitted (g)




Step #3440: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	254.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

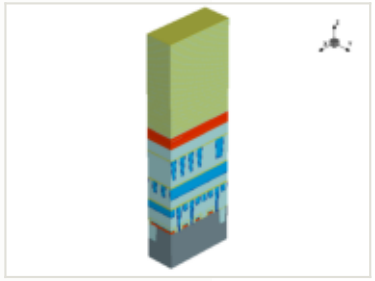




x cut at 0.000 µm

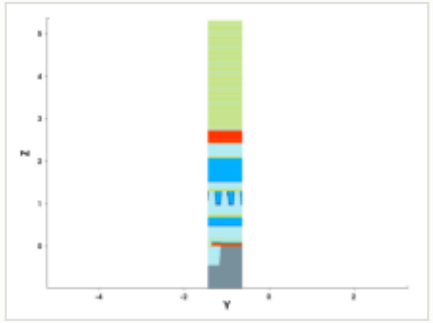

y cut at -1.035 µm

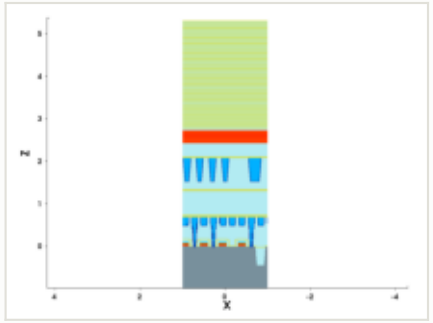


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

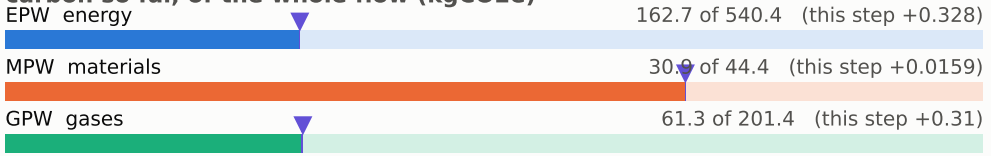

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

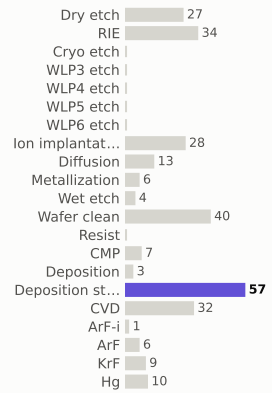

materials deposited (g)



gases emitted (g)

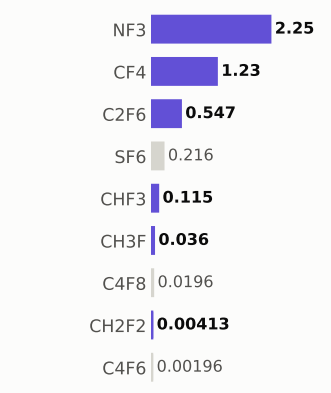


Step #3450: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	255.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

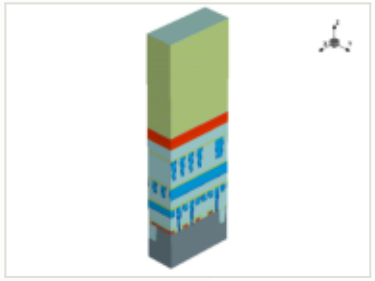



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 163.0 of 540.4 (this step +0.328)


MPW materials — 30.9 of 44.4 (this step +0.0159)

GPW gases — 61.6 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

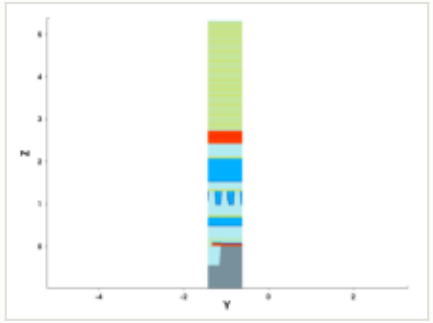


y cut at -1.035 µm

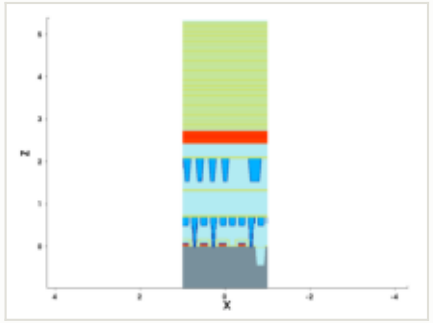


mask for this step

no mask for this step


steps by process area

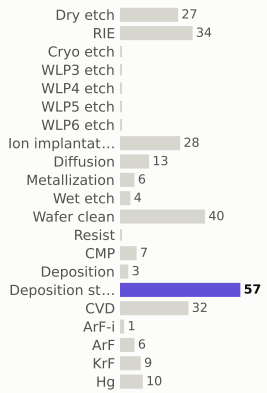

materials deposited (g)

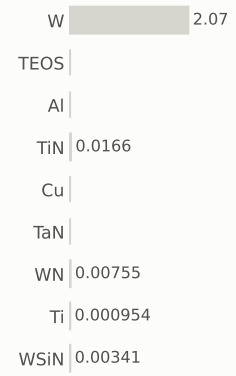

gases emitted (g)




Step #3460: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	256.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

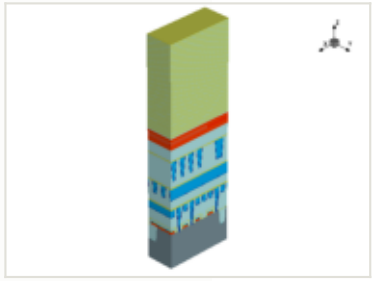



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 163.4 of 540.4 (this step +0.328)


MPW materials — 30.9 of 44.4 (this step +0.0159)

GPW gases — 61.9 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

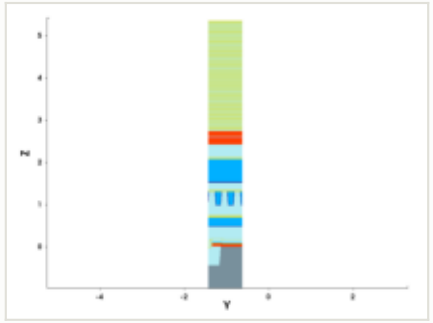


y cut at -1.035 µm

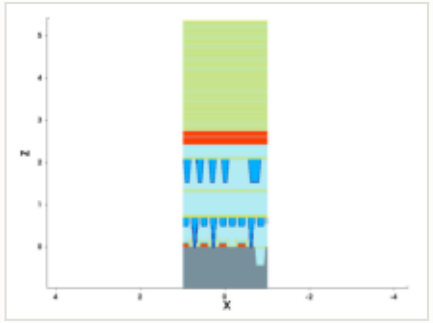


mask for this step

no mask for this step


steps by process area

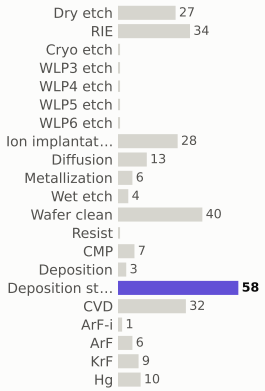

materials deposited (g)

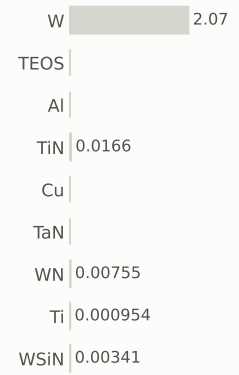

gases emitted (g)




Step #3470: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	256.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

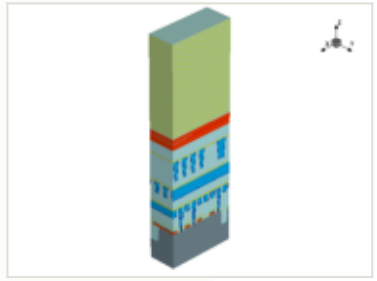



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 163.7 of 540.4 (this step +0.328)


MPW materials — 31 of 44.4 (this step +0.0159)

GPW gases — 62.2 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

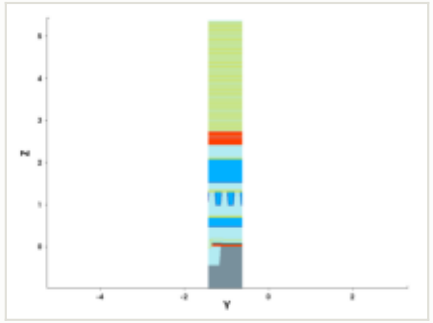


y cut at -1.035 µm

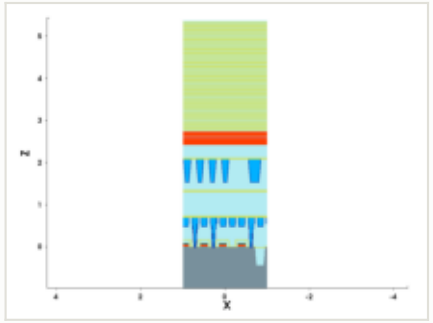


mask for this step

no mask for this step


steps by process area

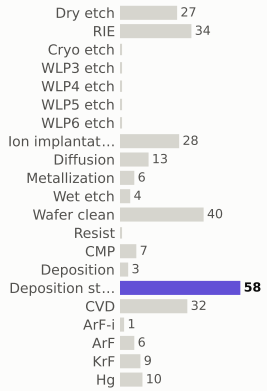

materials deposited (g)

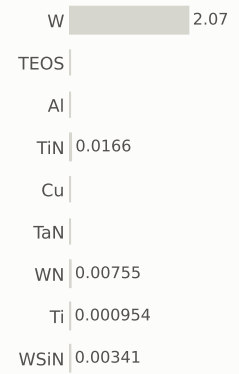

gases emitted (g)




Step #3480: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	257.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

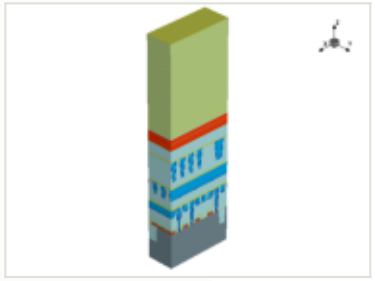




x cut at 0.000 µm

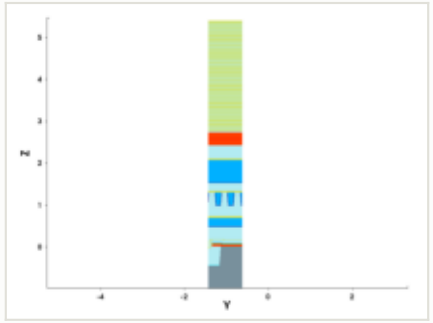

y cut at -1.035 µm

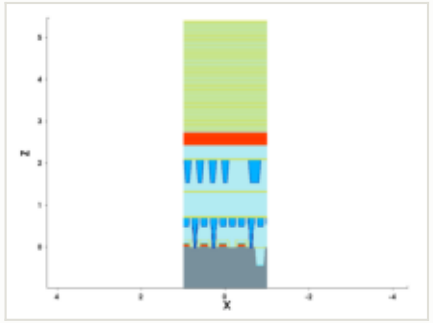

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 164.0 of 540.4 (this step +0.328)


MPW materials — 31 of 44.4 (this step +0.0159)

GPW gases — 62.5 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

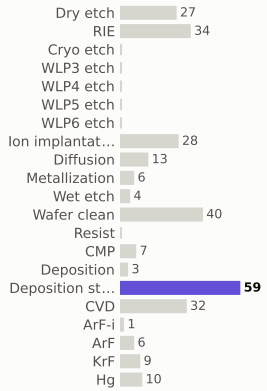

materials deposited (g)

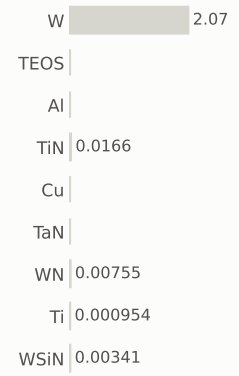

gases emitted (g)




Step #3490: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	258.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

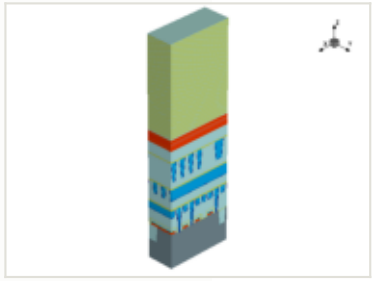



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 164.4 of 540.4 (this step +0.328)


MPW materials — 31 of 44.4 (this step +0.0159)

GPW gases — 62.8 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

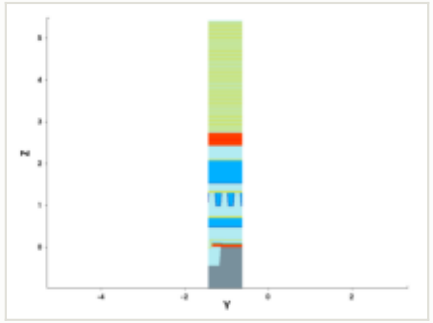


y cut at -1.035 µm

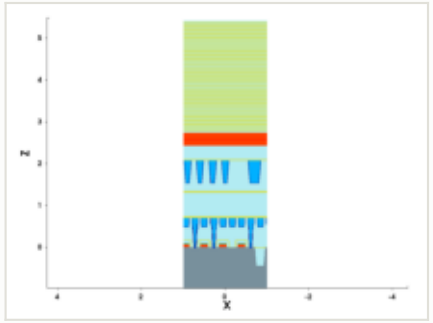


mask for this step

no mask for this step


steps by process area

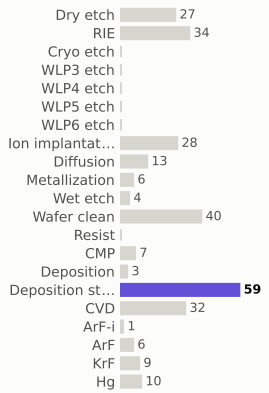

materials deposited (g)

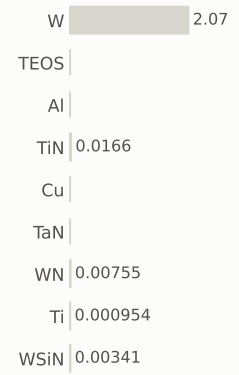

gases emitted (g)




Step #3500: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	258.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

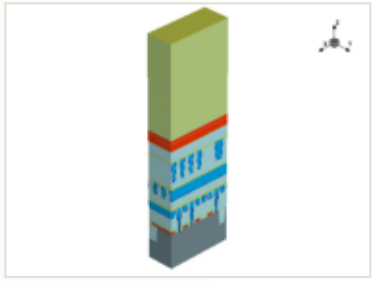



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 164.7 of 540.4 (this step +0.328)


MPW materials — 31 of 44.4 (this step +0.0159)

GPW gases — 63.1 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

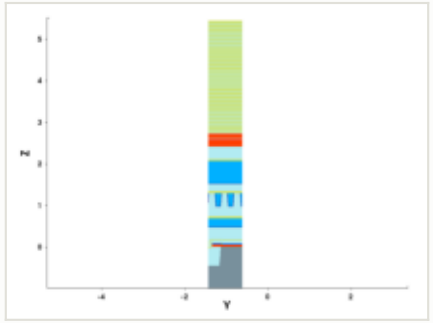


y cut at -1.035 µm

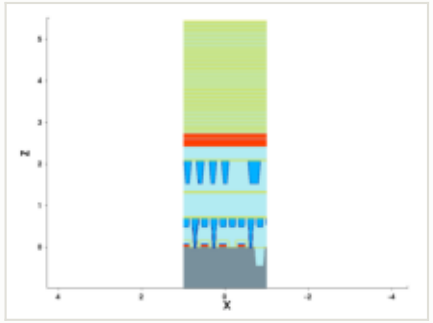


mask for this step

no mask for this step


steps by process area

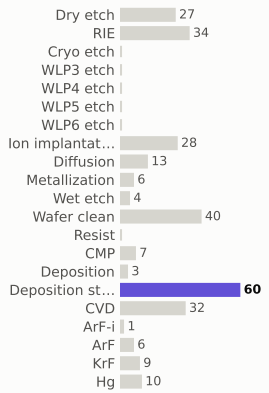

materials deposited (g)

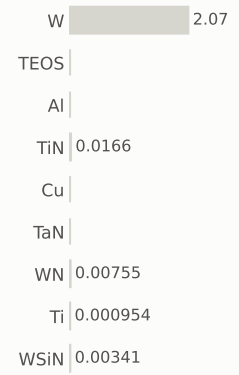

gases emitted (g)




Step #3510: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	259.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

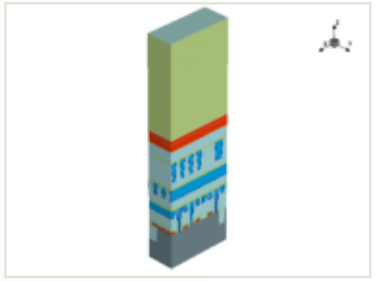



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 165.0 of 540.4 (this step +0.328)


MPW materials — 31 of 44.4 (this step +0.0159)

GPW gases — 63.4 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

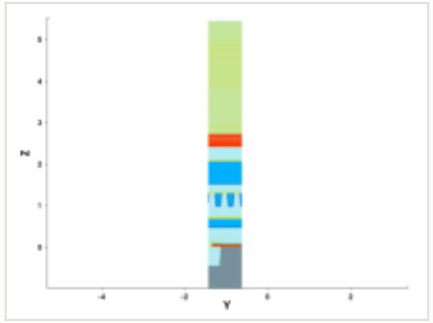


y cut at -1.035 µm

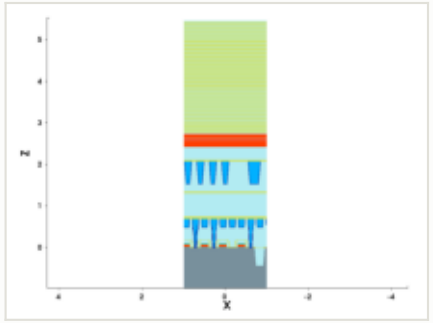


mask for this step

no mask for this step


steps by process area

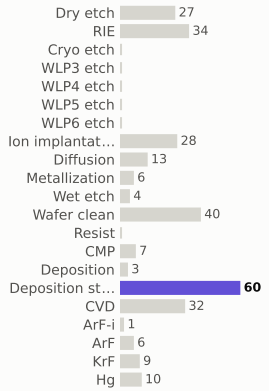

materials deposited (g)

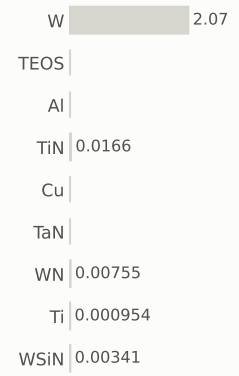

gases emitted (g)




Step #3520: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	260.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

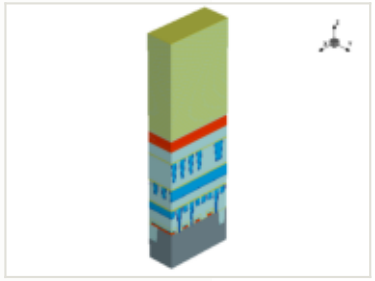




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

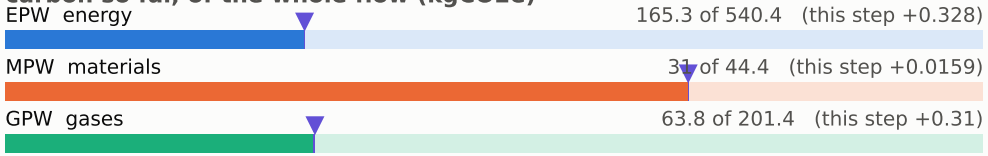


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

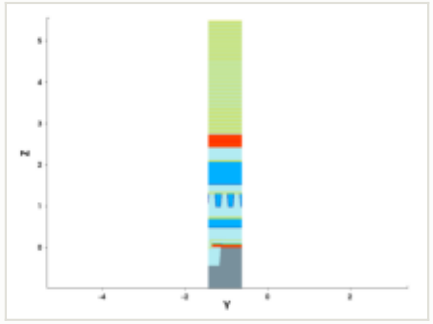


y cut at -1.035 µm

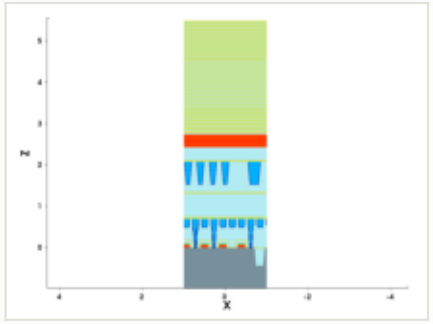


mask for this step

no mask for this step


steps by process area

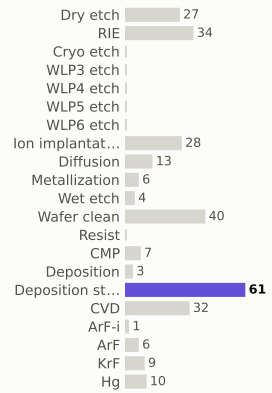

materials deposited (g)

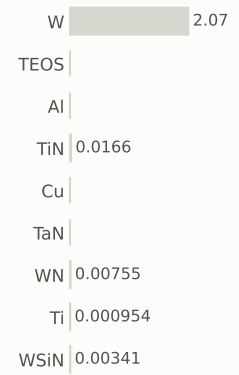

gases emitted (g)




Step #3530: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	260.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

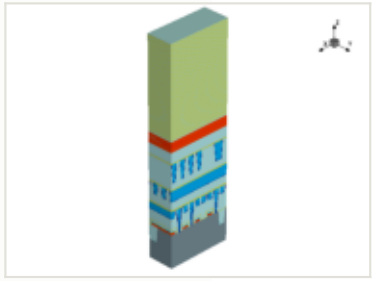




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

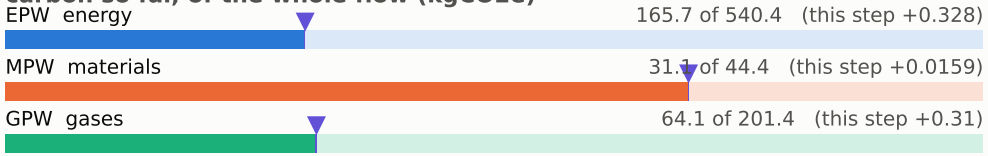


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

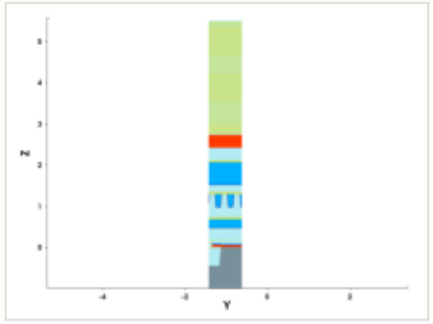


y cut at -1.035 µm

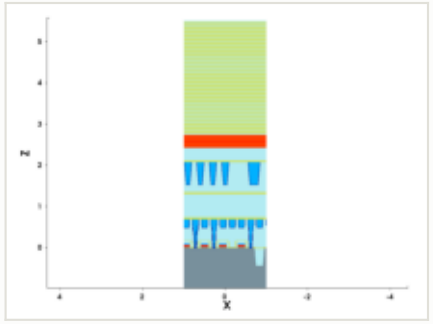


mask for this step

no mask for this step


steps by process area

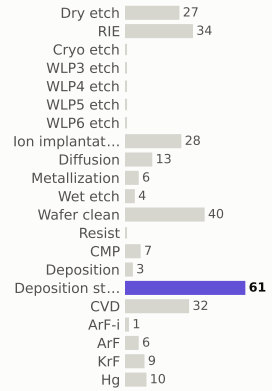

materials deposited (g)

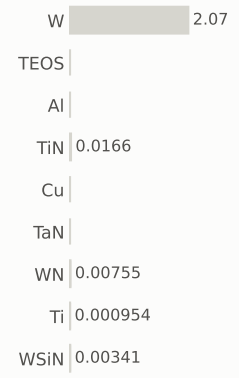

gases emitted (g)




Step #3540: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	261.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

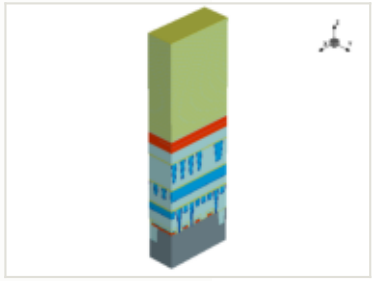




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

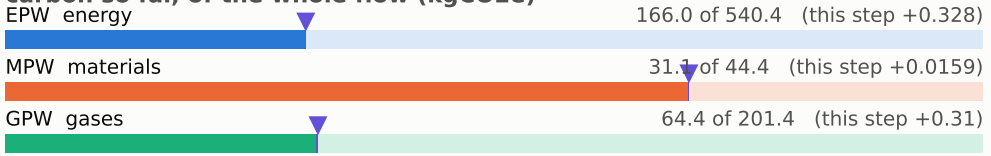


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

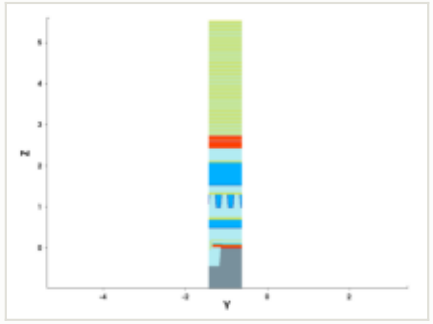


y cut at -1.035 µm

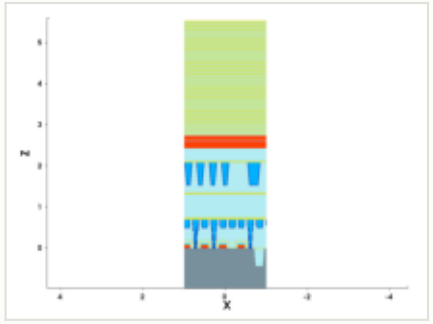

mask for this step

no mask for this step


steps by process area

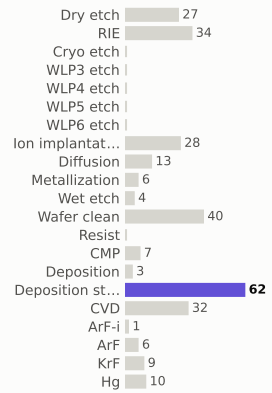

materials deposited (g)



gases emitted (g)

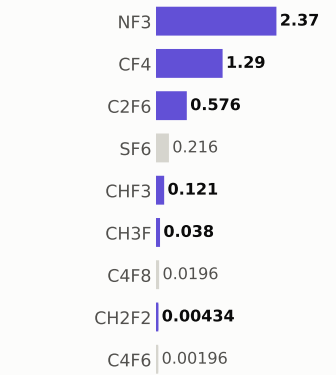


Step #3550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	262.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

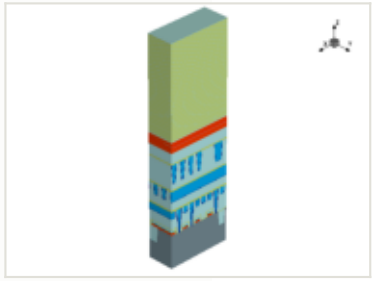




x cut at 0.000 µm

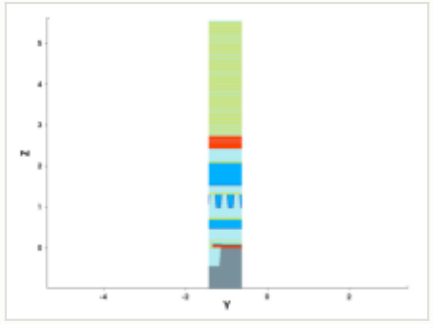

y cut at -1.035 µm

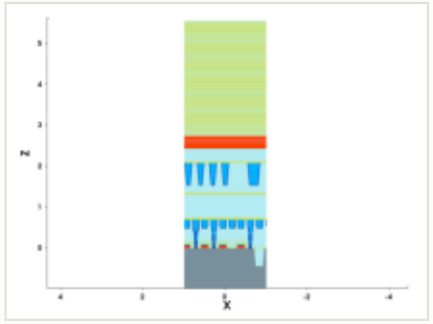


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

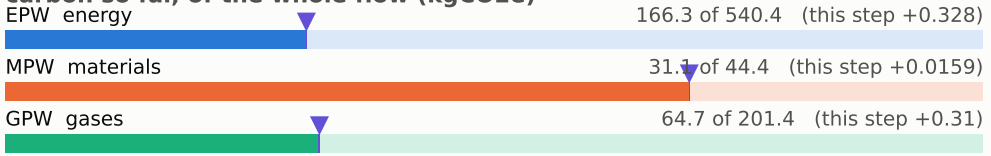


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

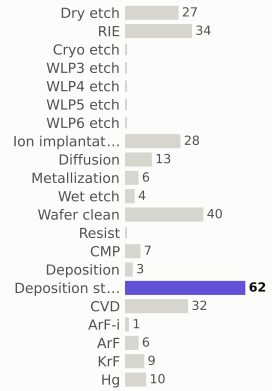

materials deposited (g)

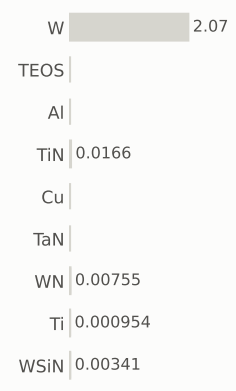

gases emitted (g)




Step #3560: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	262.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

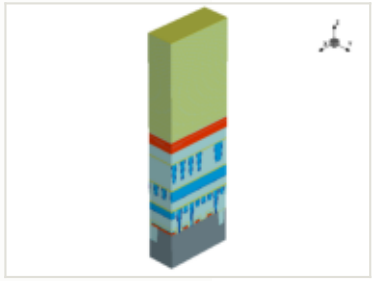




x cut at 0.000 µm

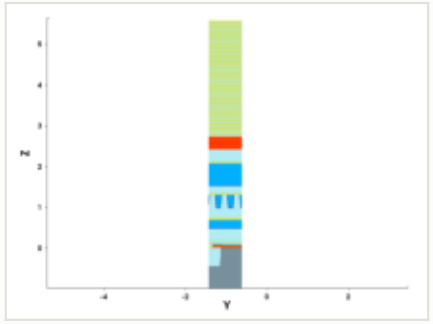

y cut at -1.035 µm

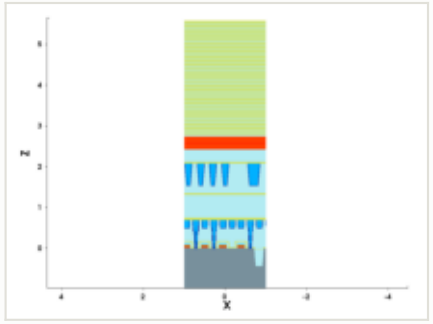


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

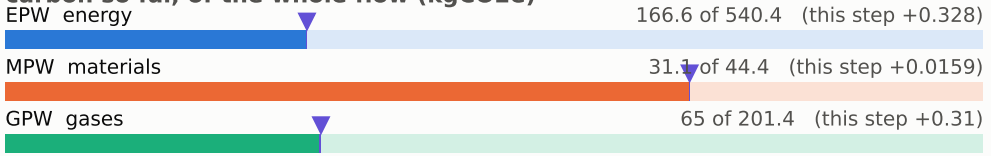

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

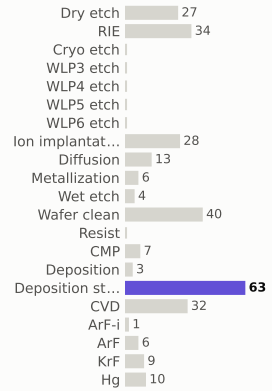

materials deposited (g)



gases emitted (g)




Step #3570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	263.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

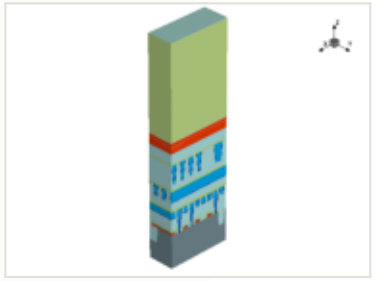




x cut at 0.000 µm

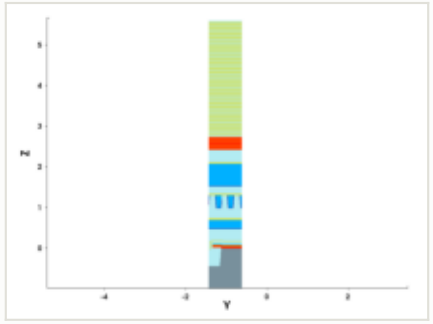

y cut at -1.035 µm

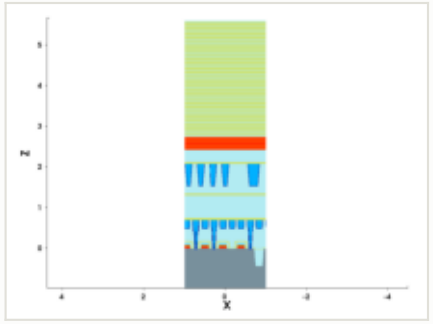


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

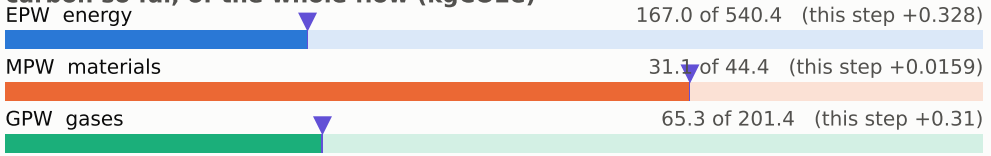


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

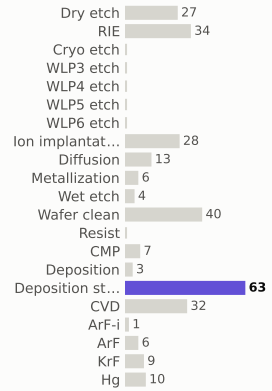

materials deposited (g)

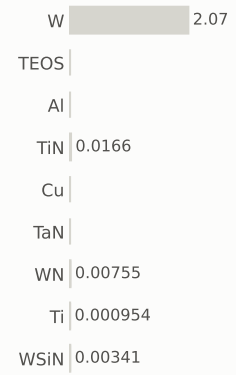

gases emitted (g)




Step #3580: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	264.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

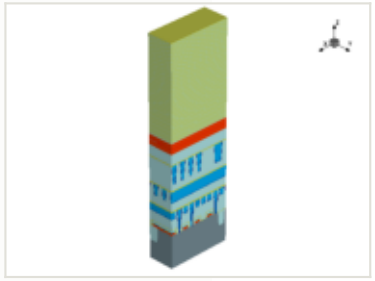




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

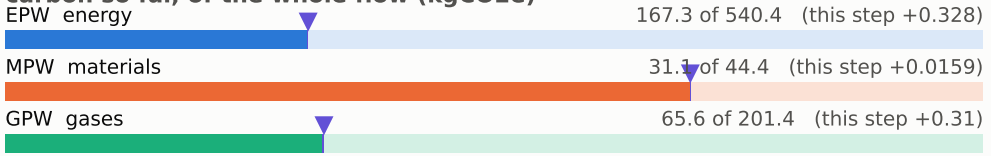


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

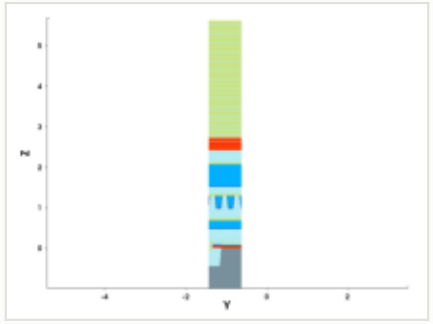


y cut at -1.035 µm

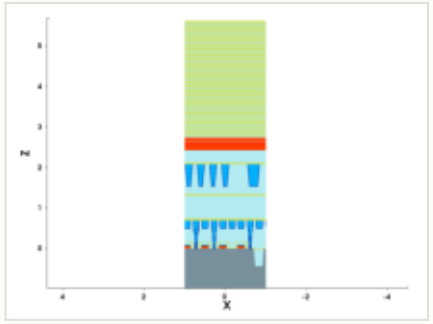

mask for this step

no mask for this step


steps by process area

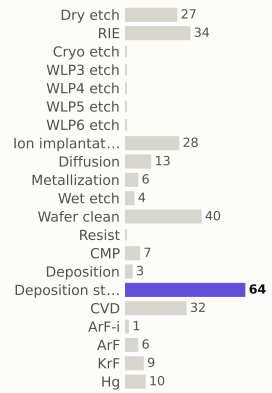

materials deposited (g)



gases emitted (g)




Step #3590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	264.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

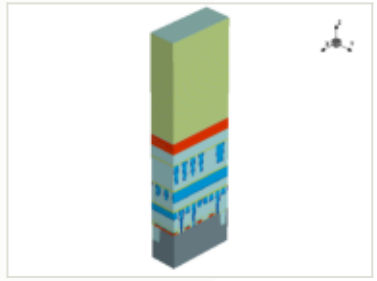



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 167.6 of 540.4 (this step +0.328)


MPW materials — 31.1 of 44.4 (this step +0.0159)

GPW gases — 65.9 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

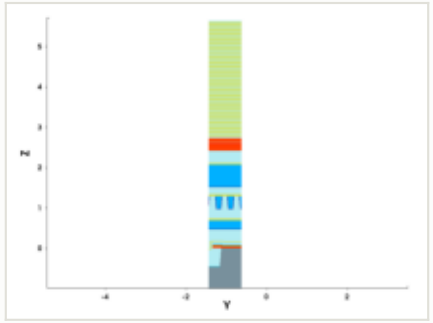


y cut at -1.035 µm

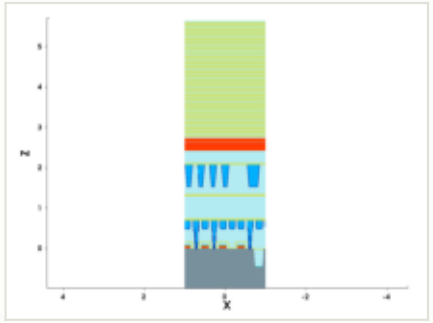


mask for this step

no mask for this step


steps by process area

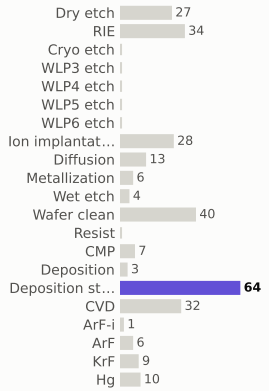

materials deposited (g)

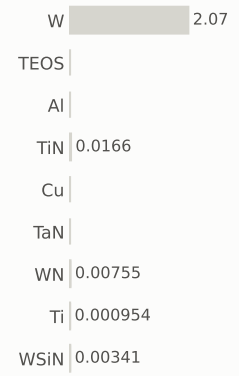

gases emitted (g)




Step #3600: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	265.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

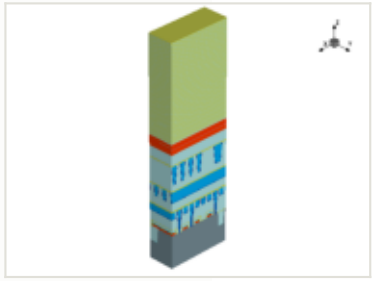




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

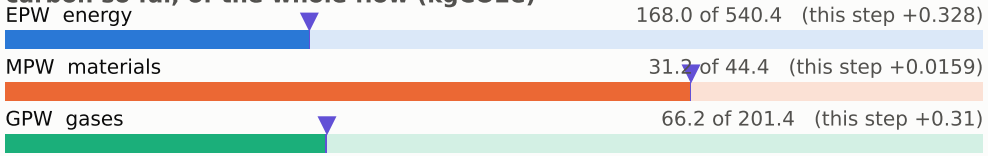


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

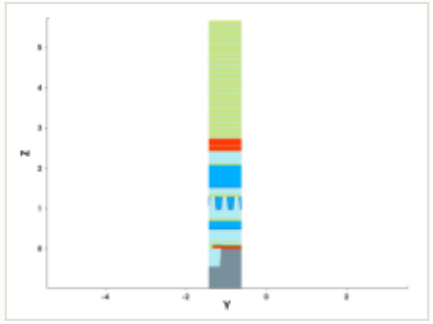


y cut at -1.035 µm

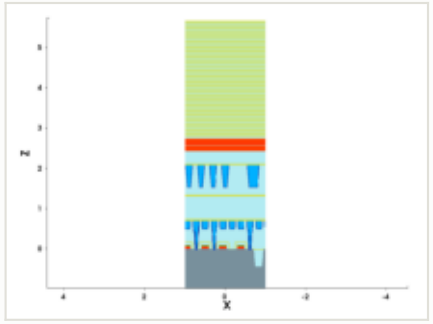

mask for this step

no mask for this step


steps by process area

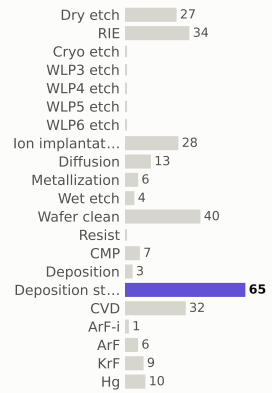

materials deposited (g)



gases emitted (g)




Step #3610: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	266.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

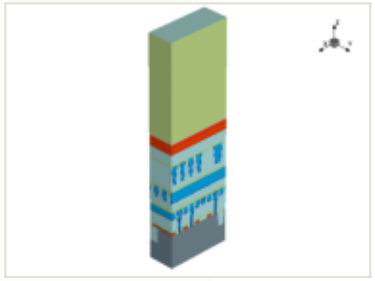




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

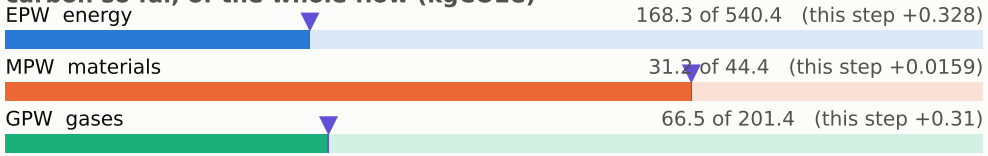


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

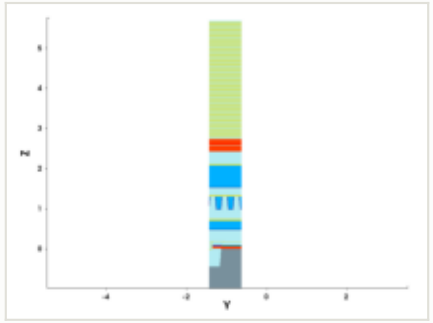


y cut at -1.035 µm

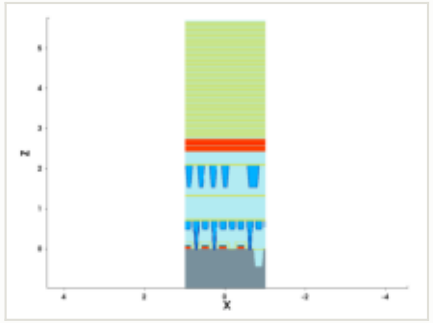

mask for this step

no mask for this step


steps by process area

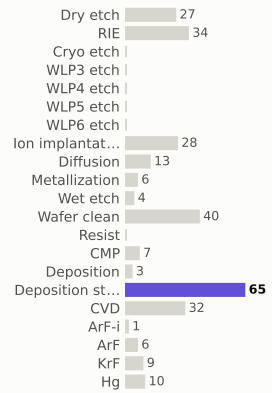

materials deposited (g)



gases emitted (g)




Step #3620: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	266.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

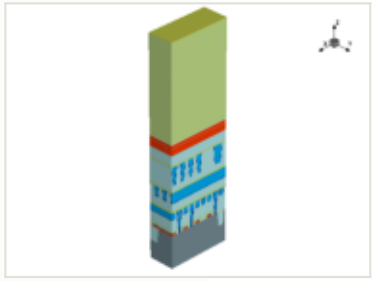


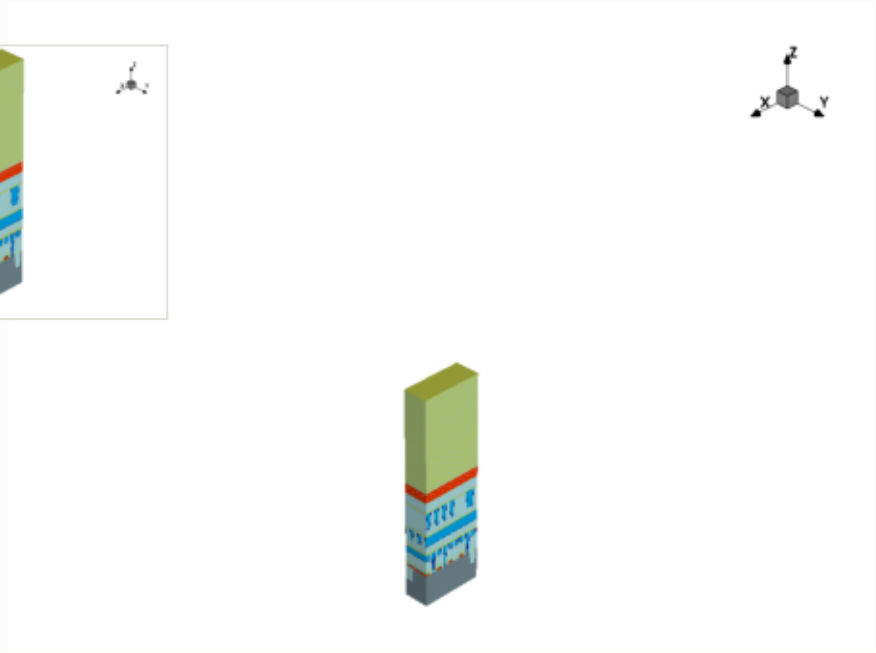

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

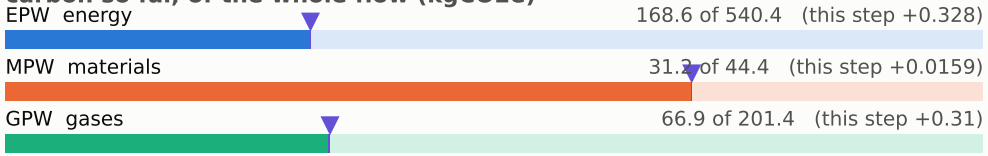


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

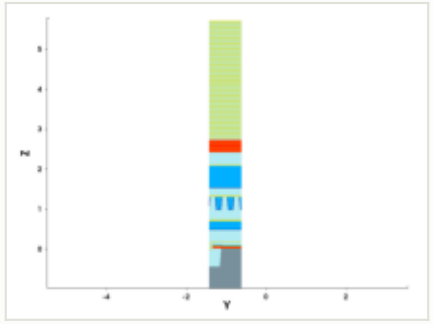


y cut at -1.035 µm

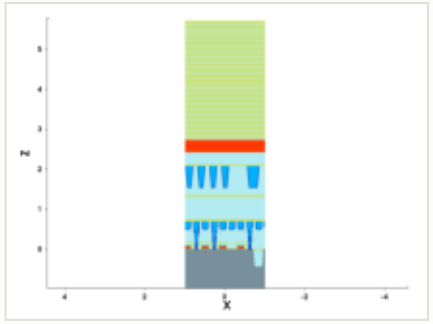

mask for this step

no mask for this step


steps by process area

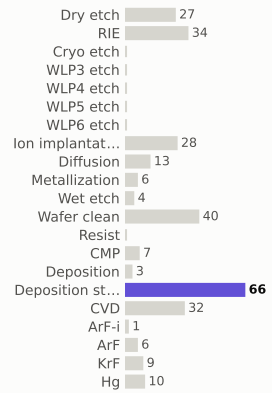

materials deposited (g)



gases emitted (g)




Step #3630: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	267.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

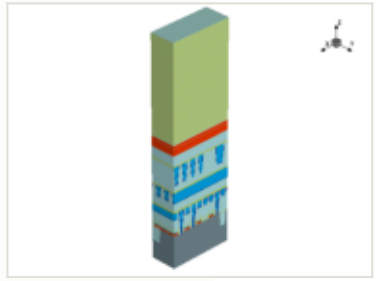




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

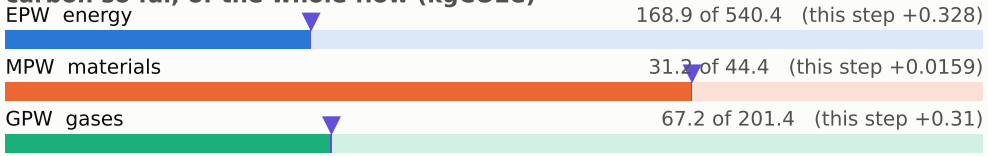


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

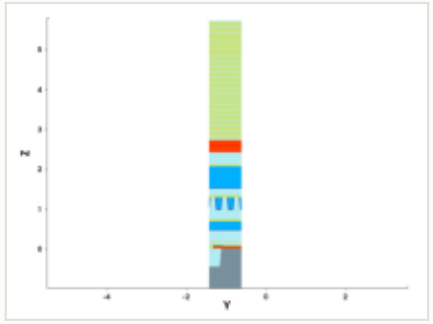


y cut at -1.035 µm

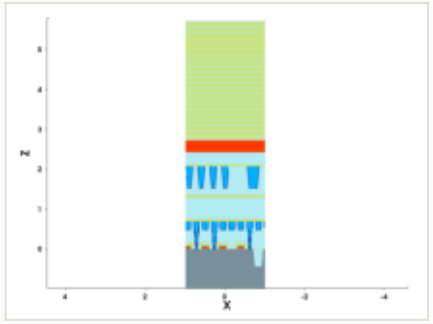

mask for this step

no mask for this step


steps by process area

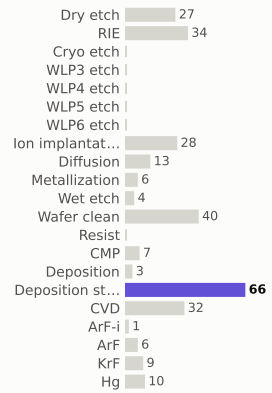

materials deposited (g)



gases emitted (g)




Step #3640: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	268.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

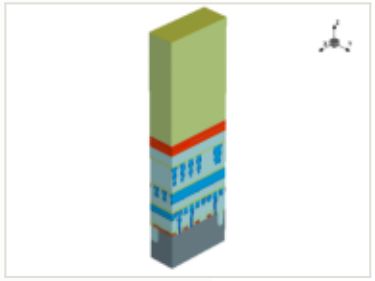


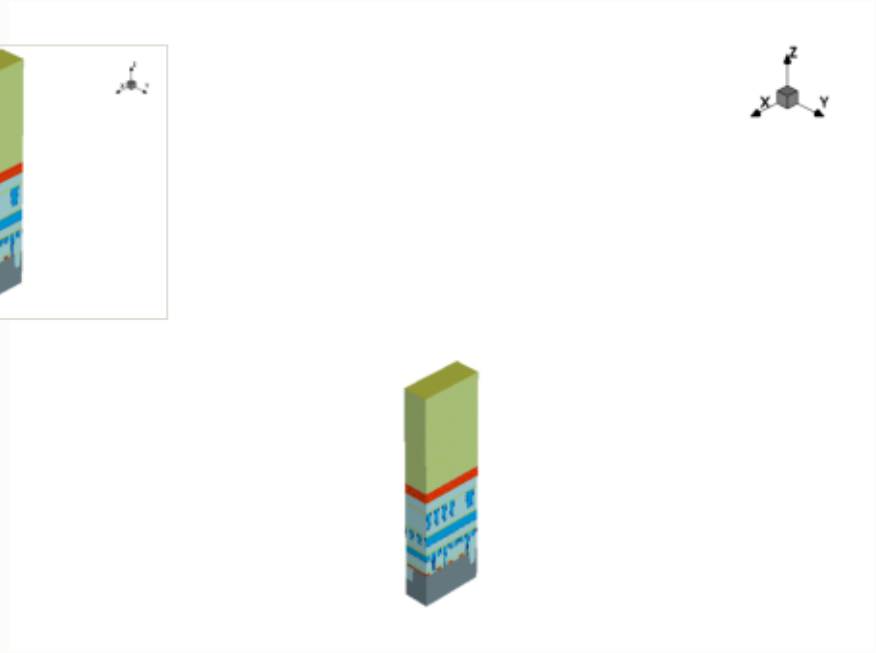

x cut at 0.000 µm

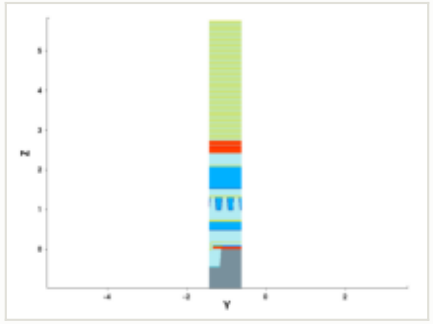

y cut at -1.035 µm

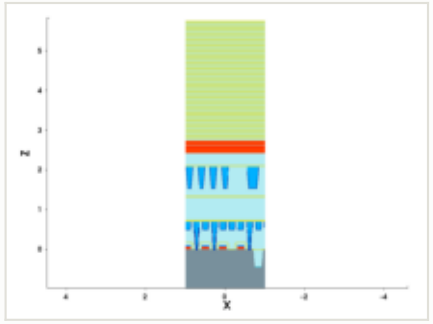

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 169.3 of 540.4 (this step +0.328)


MPW materials — 31.2 of 44.4 (this step +0.0159)

GPW gases — 67.5 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

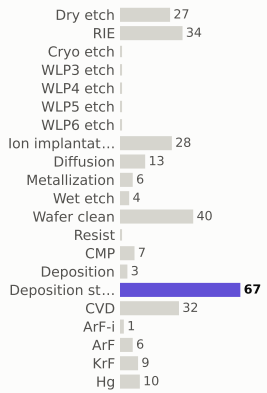

materials deposited (g)

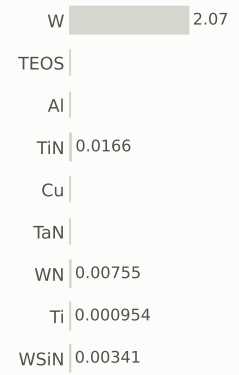

gases emitted (g)




Step #3650: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	268.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

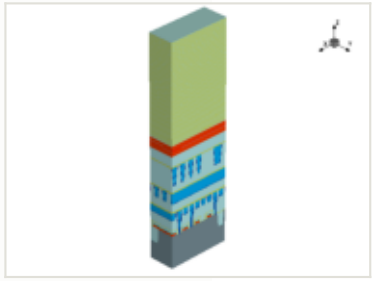




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

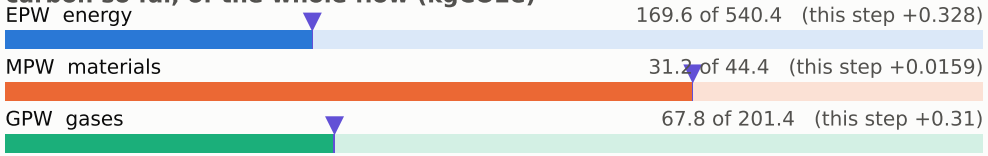


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

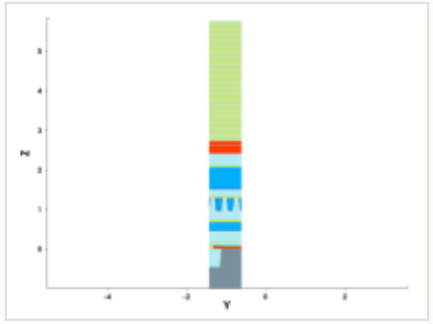


y cut at -1.035 µm

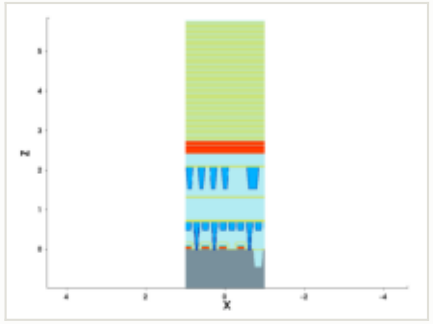


mask for this step

no mask for this step


steps by process area

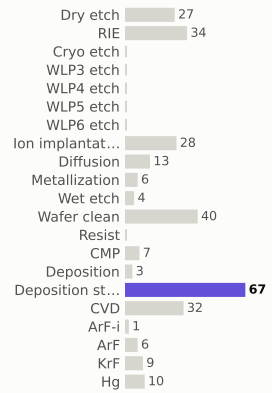

materials deposited (g)

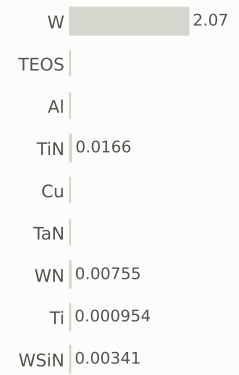

gases emitted (g)




Step #3660: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	269.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

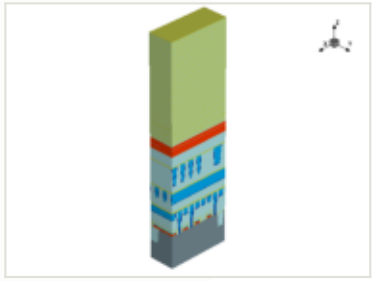


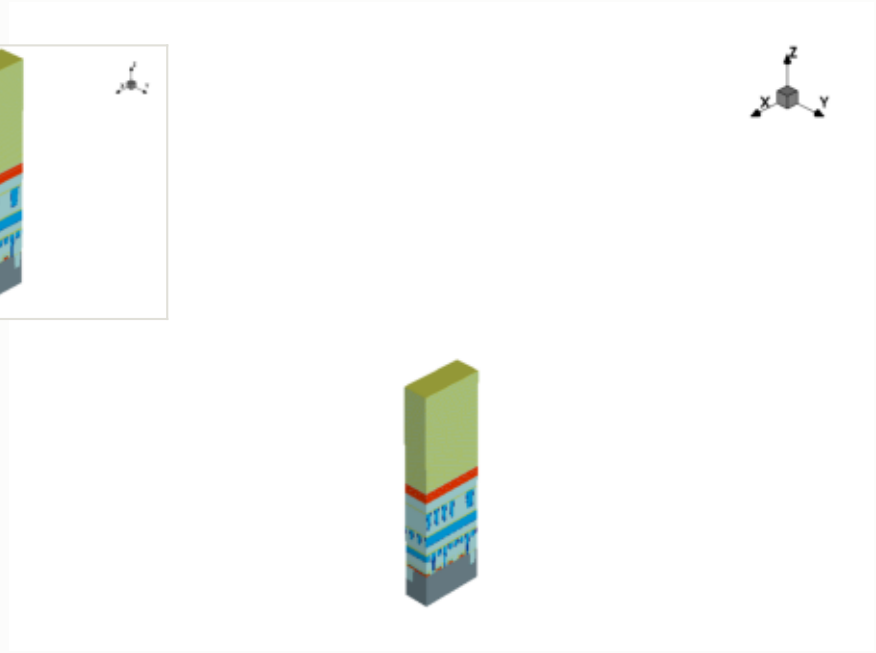

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

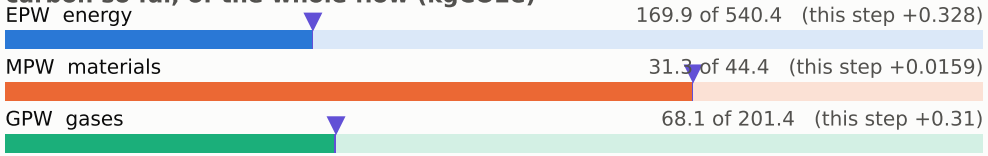


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

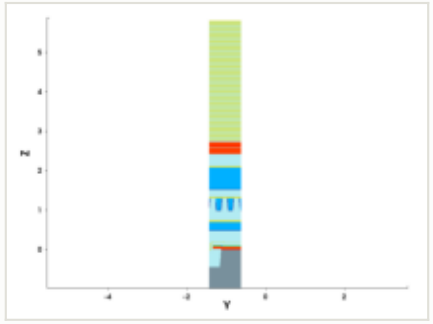


y cut at -1.035 µm

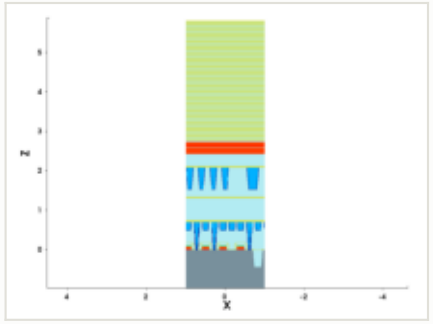

mask for this step

no mask for this step


steps by process area

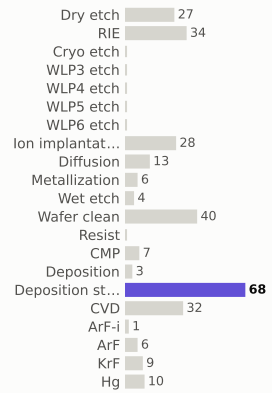

materials deposited (g)



gases emitted (g)




Step #3670: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	269.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

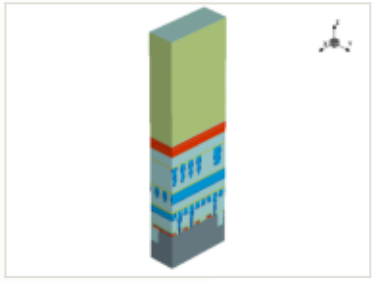




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

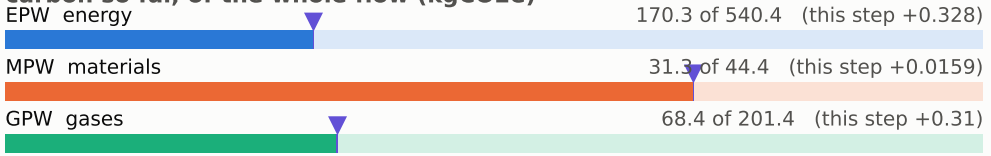


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

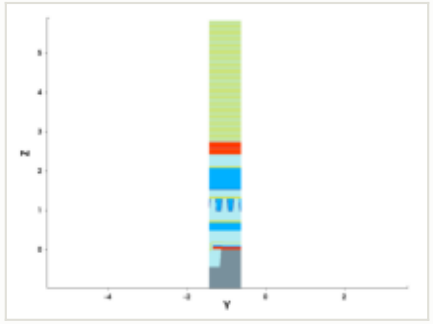


y cut at -1.035 µm

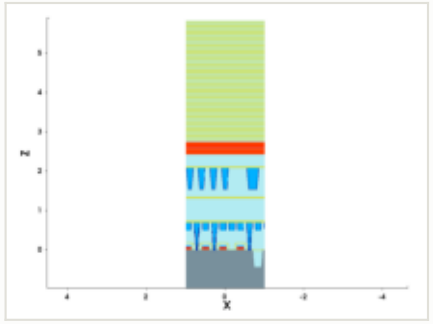

mask for this step

no mask for this step


steps by process area

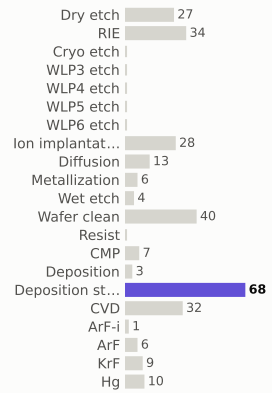

materials deposited (g)



gases emitted (g)




Step #3680: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	270.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

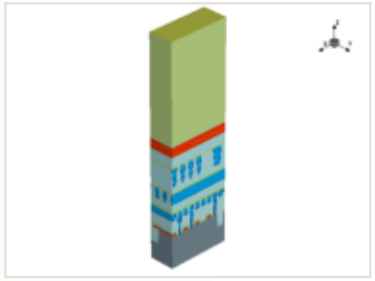


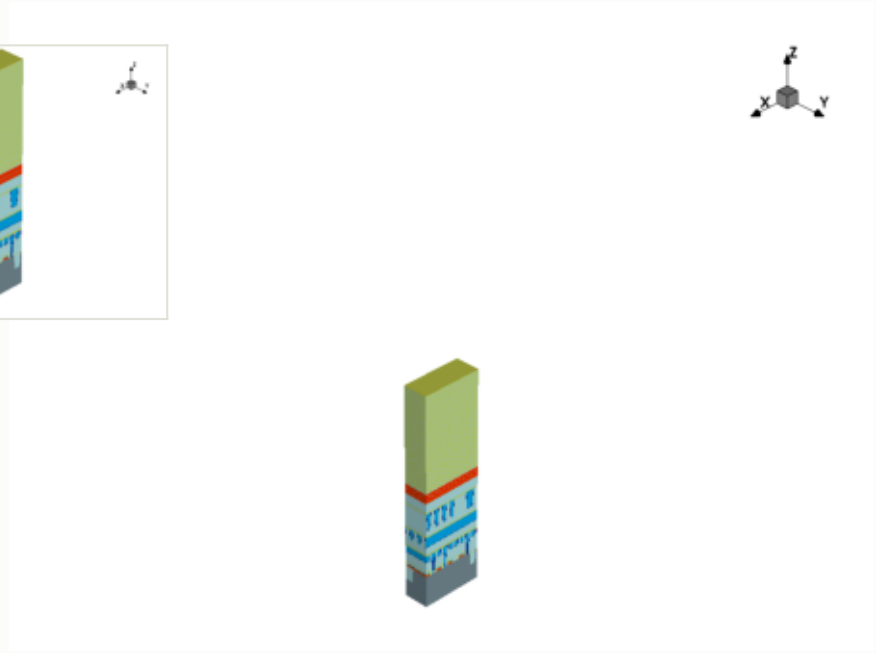

x cut at 0.000 µm

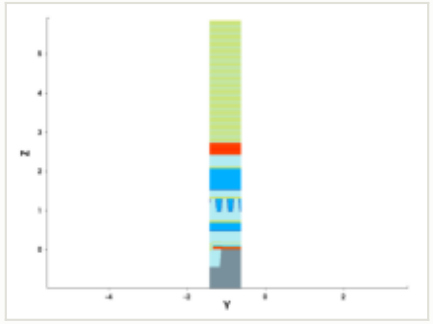

y cut at -1.035 µm

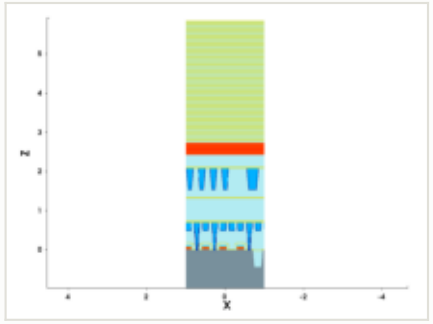


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

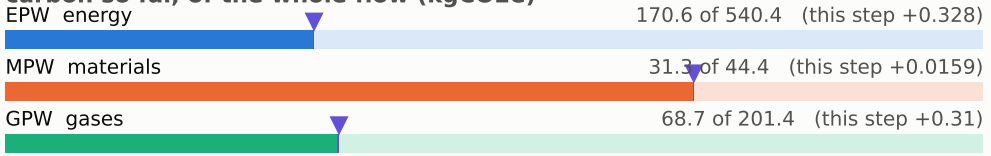

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

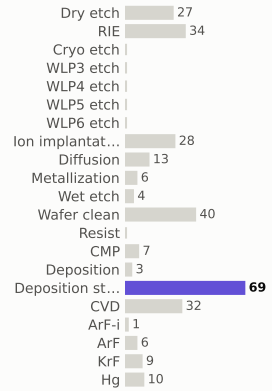

materials deposited (g)



gases emitted (g)




Step #3690: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	271.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

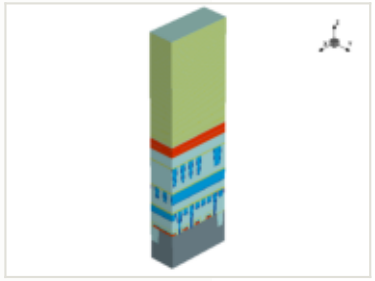


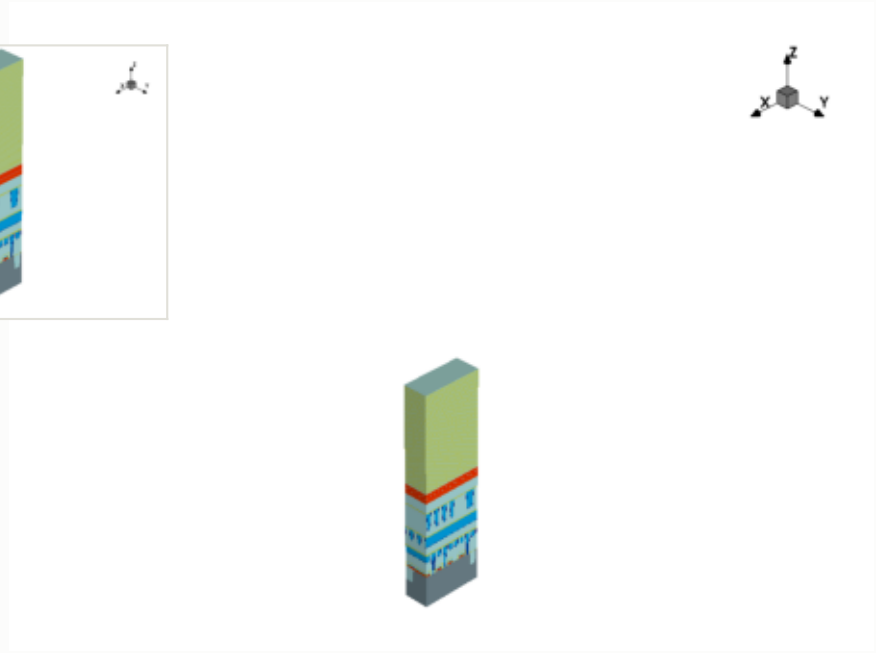

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

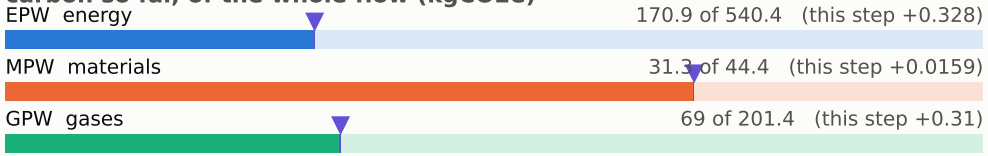


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

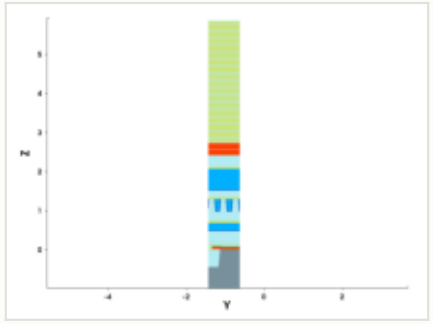


y cut at -1.035 µm

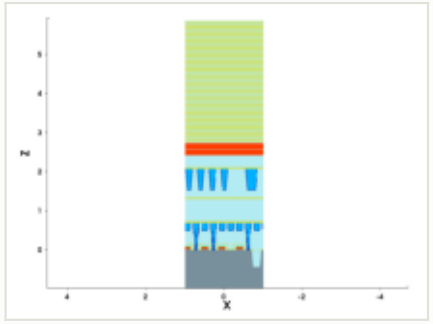

mask for this step

no mask for this step


steps by process area

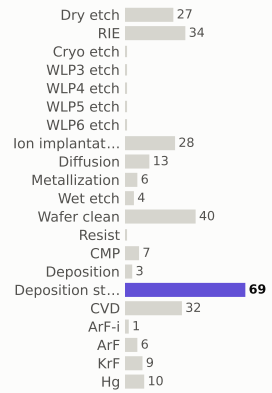

materials deposited (g)



gases emitted (g)




Step #3700: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	271.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

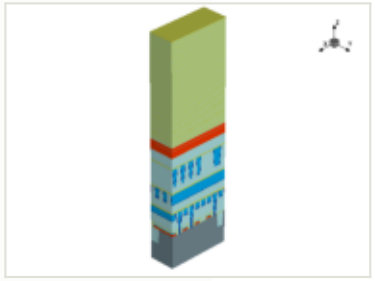


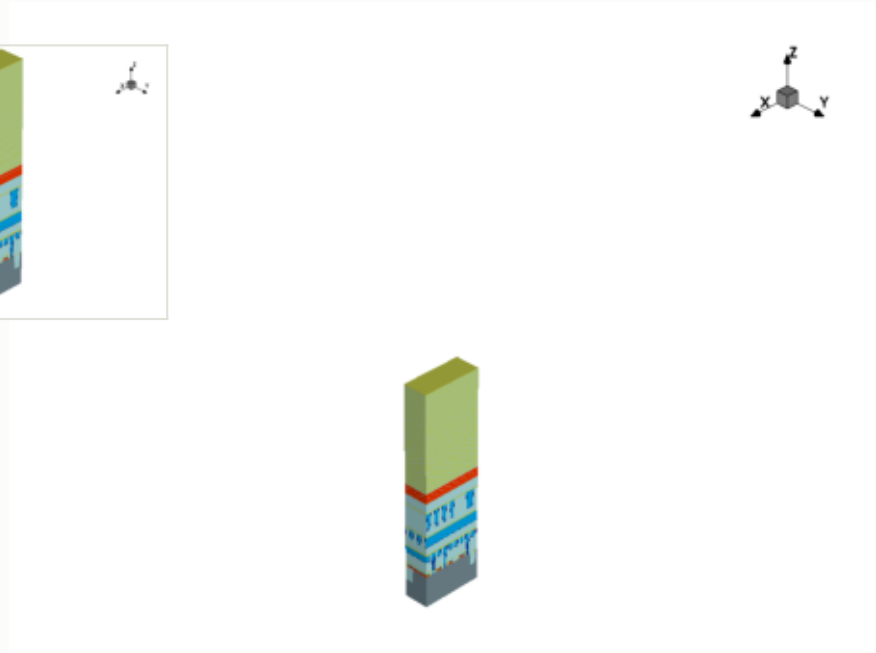

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

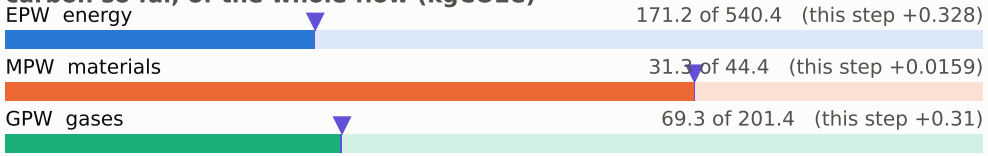


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

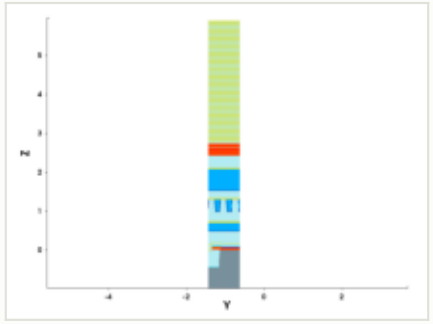


y cut at -1.035 µm

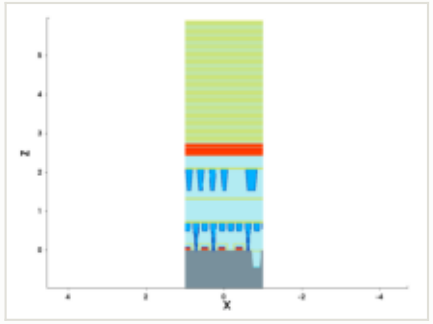

mask for this step

no mask for this step


steps by process area

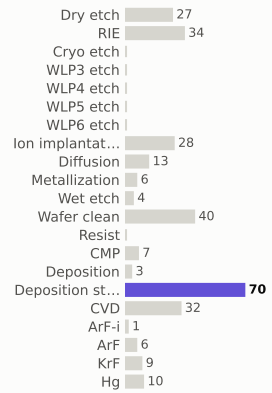

materials deposited (g)



gases emitted (g)




Step #3710: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	272.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

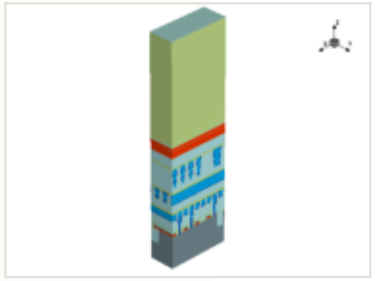


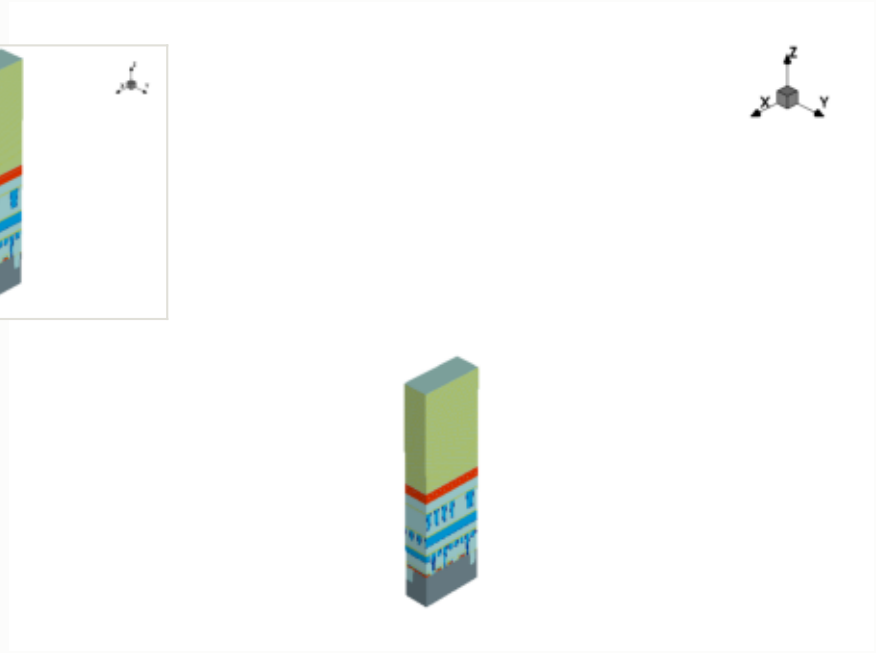

x cut at 0.000 µm

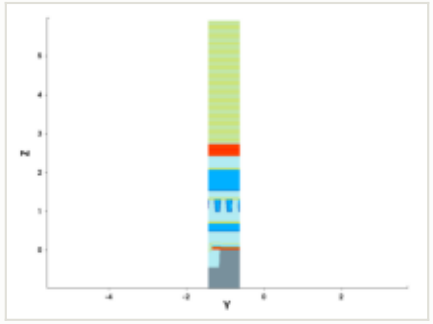

y cut at -1.035 µm

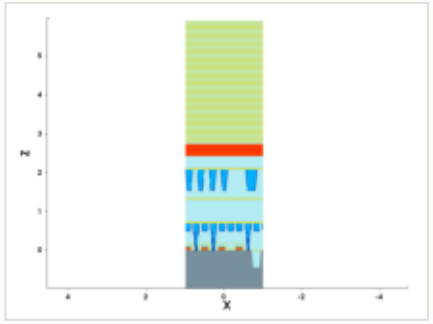


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

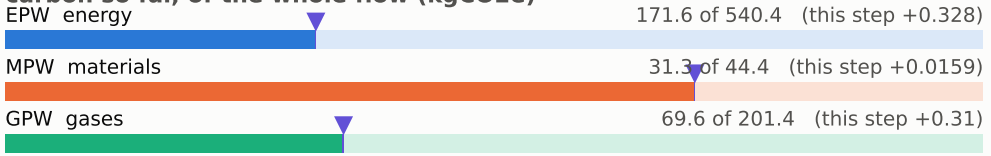

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

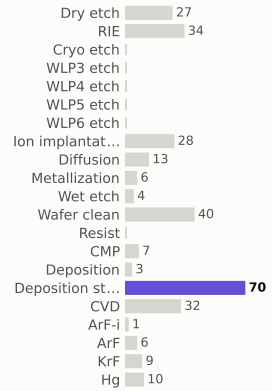

materials deposited (g)



gases emitted (g)




Step #3720: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	273.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

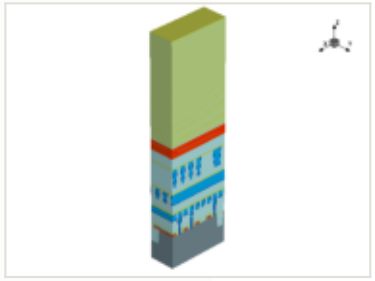

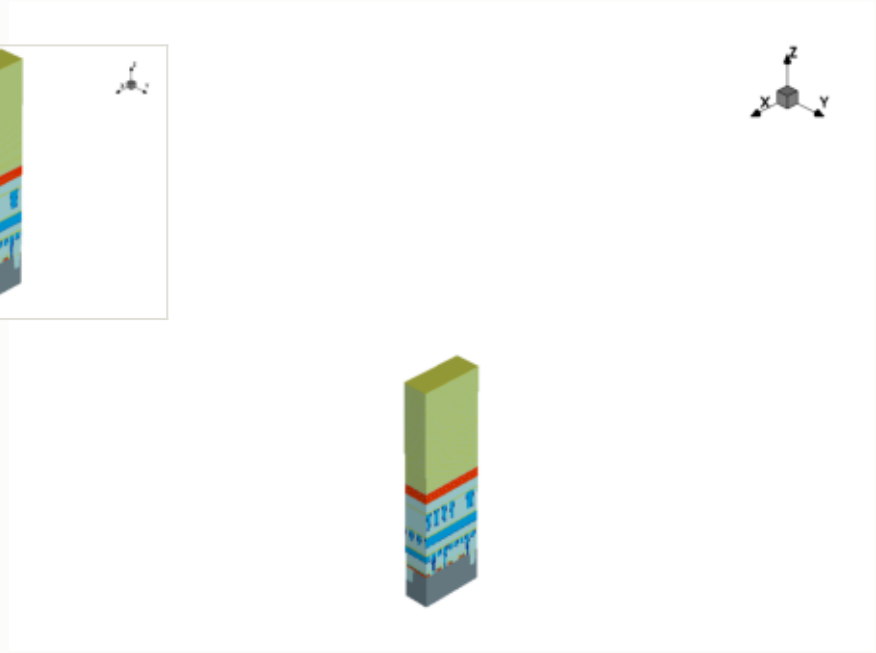

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 171.9 of 540.4 (this step +0.328)


MPW materials — 31.4 of 44.4 (this step +0.0159)

GPW gases — 70 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

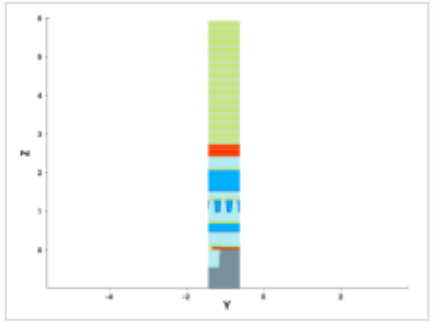


y cut at -1.035 µm

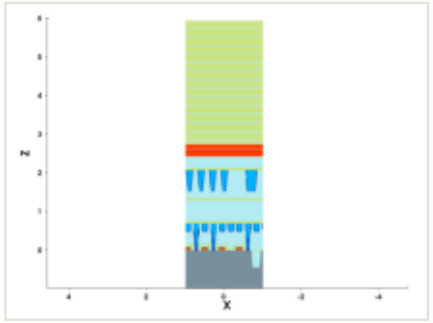


mask for this step

no mask for this step


steps by process area

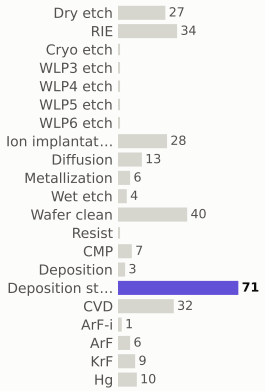

materials deposited (g)

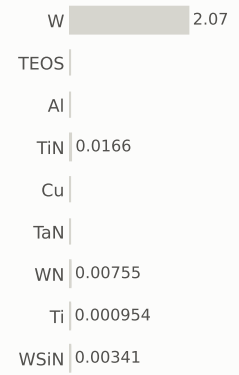

gases emitted (g)




Step #3730: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	273.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

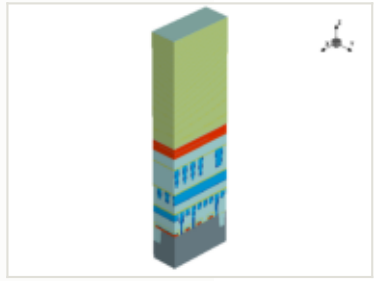


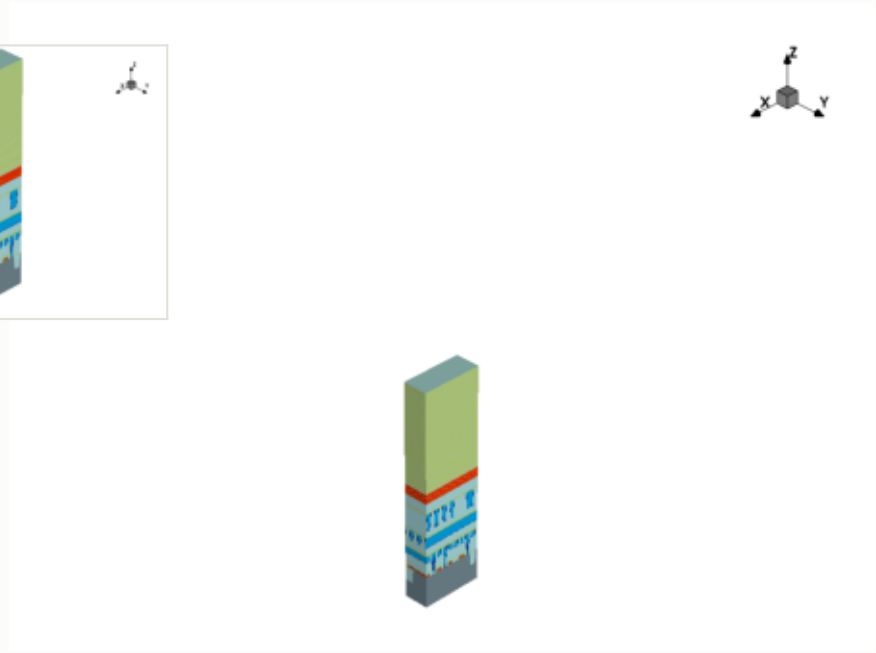

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

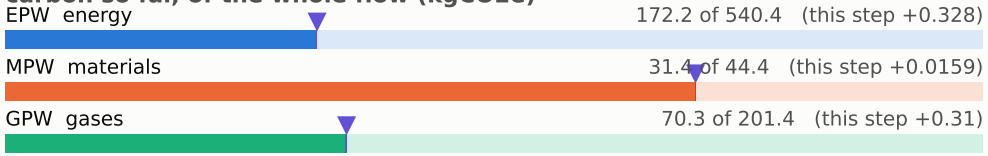


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

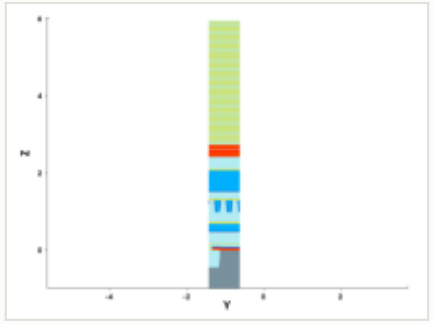


y cut at -1.035 µm

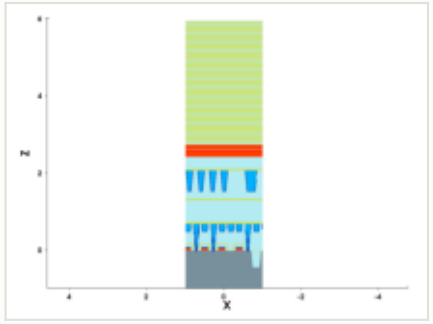

mask for this step

no mask for this step


steps by process area

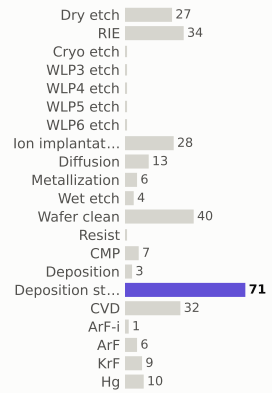

materials deposited (g)



gases emitted (g)




Step #3740: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	274.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

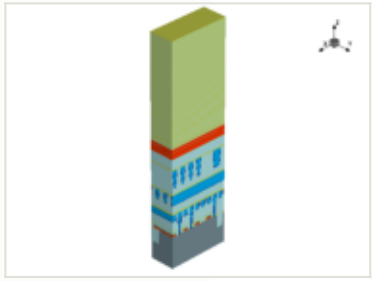



this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 172.6 of 540.4 (this step +0.328)


MPW materials — 31.4 of 44.4 (this step +0.0159)

GPW gases — 70.6 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

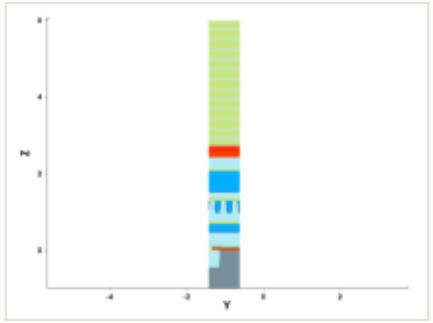


y cut at -1.035 µm

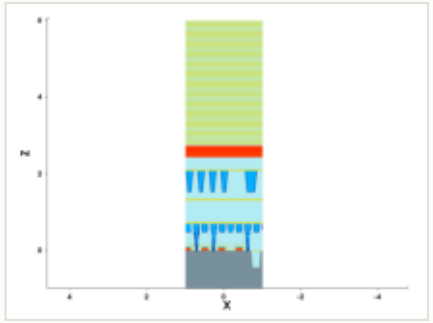


mask for this step

no mask for this step


steps by process area

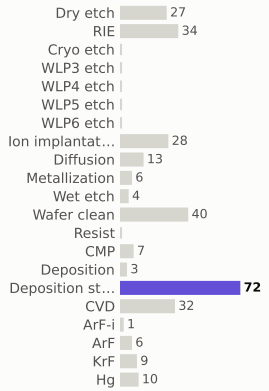

materials deposited (g)

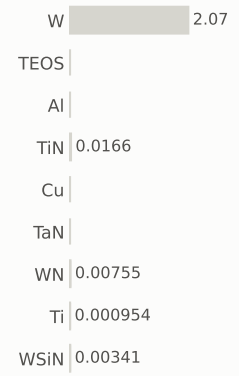

gases emitted (g)




Step #3750: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	275.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

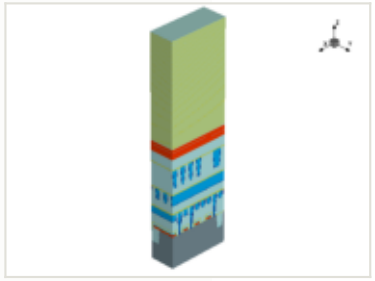


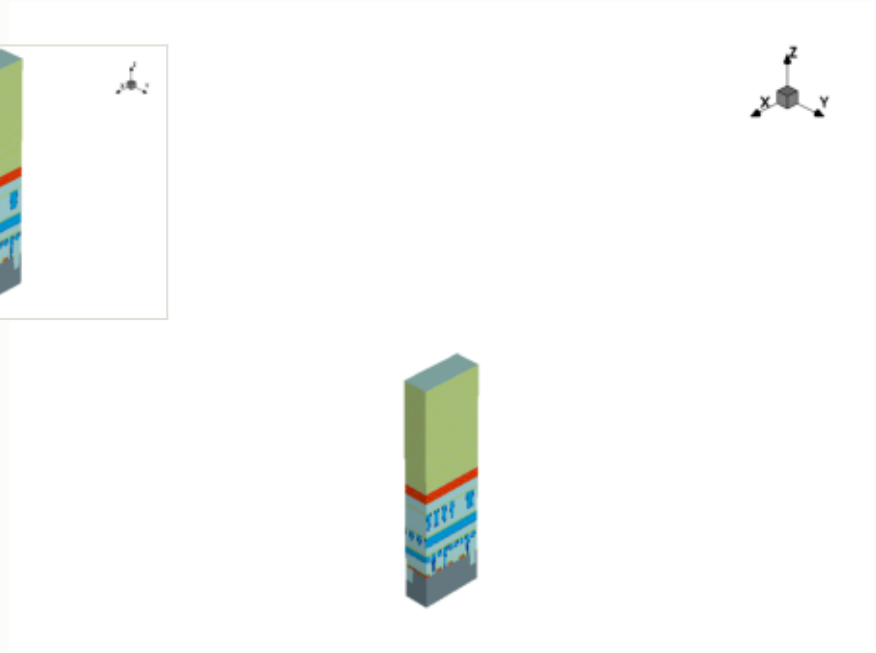

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

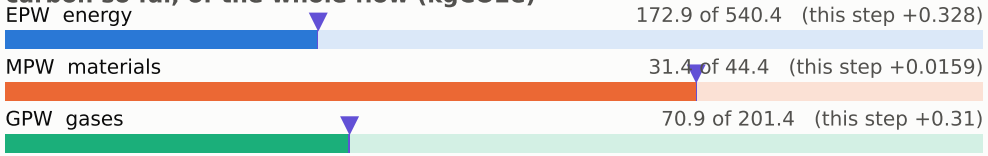


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

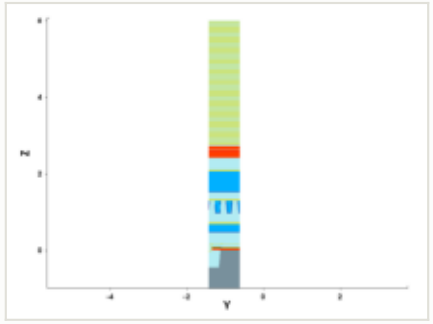


y cut at -1.035 µm

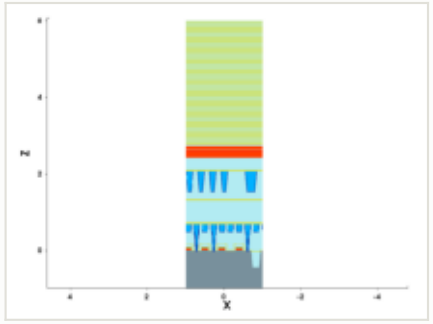

mask for this step

no mask for this step


steps by process area

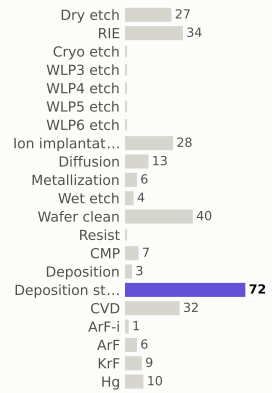

materials deposited (g)



gases emitted (g)




Step #3760: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	275.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

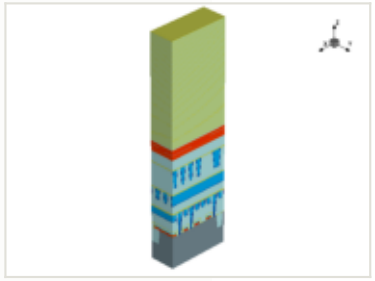


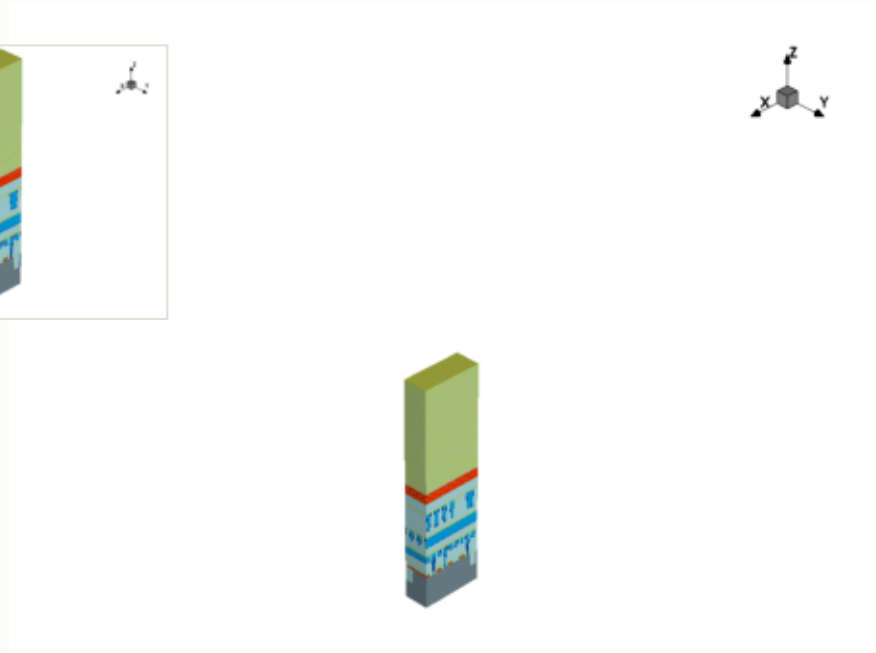

x cut at 0.000 µm

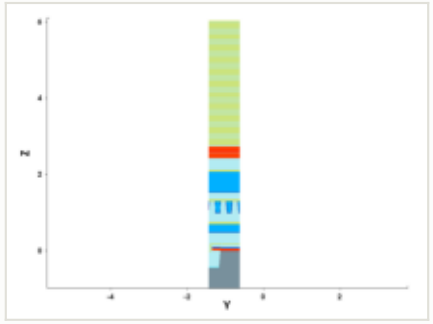

y cut at -1.035 µm

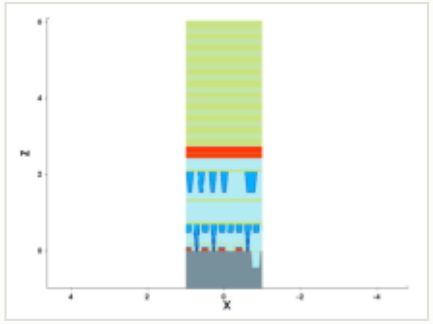


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

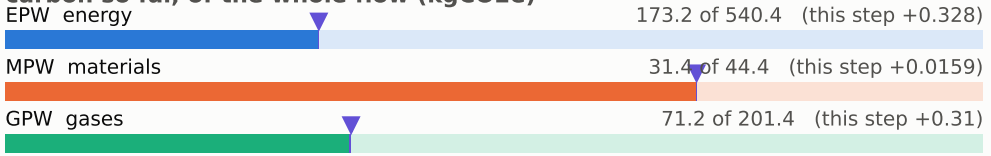


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

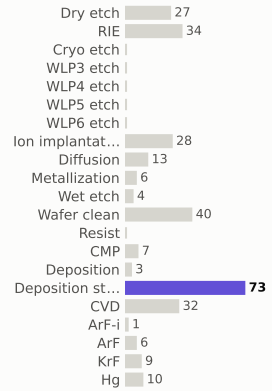

materials deposited (g)

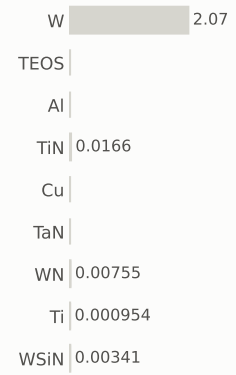

gases emitted (g)




Step #3770: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	276.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

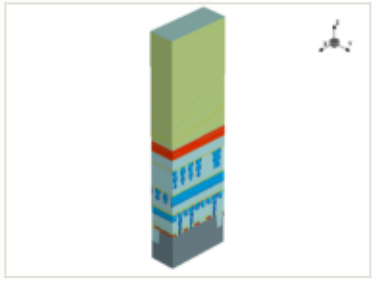


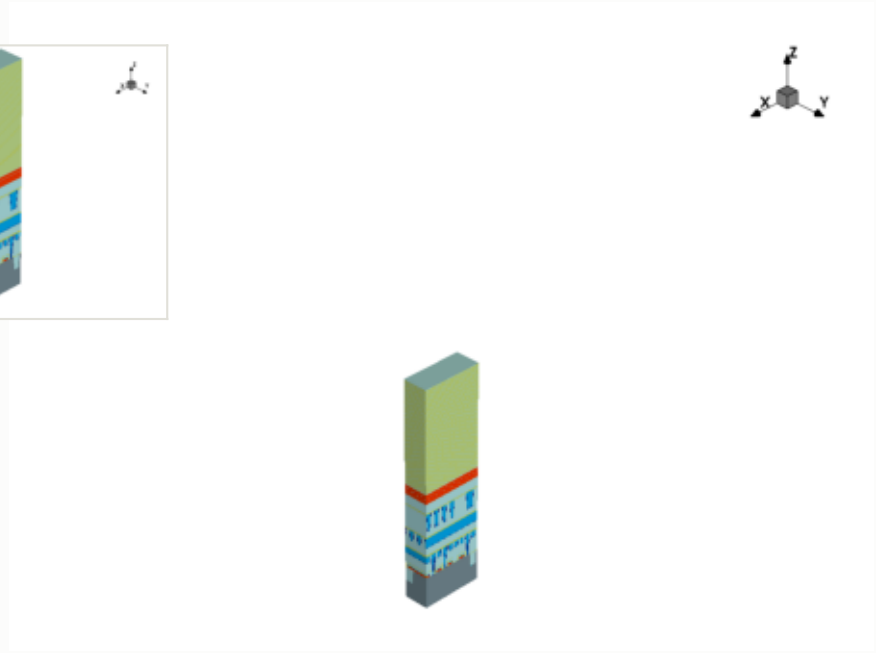

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

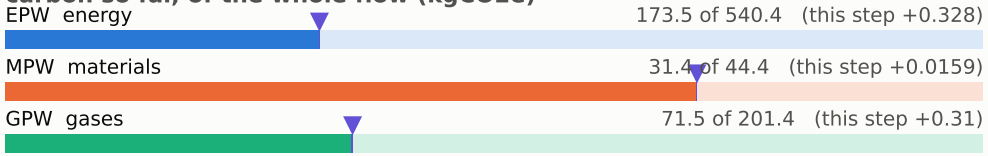


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

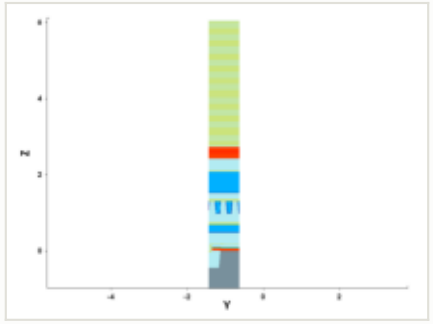


y cut at -1.035 µm

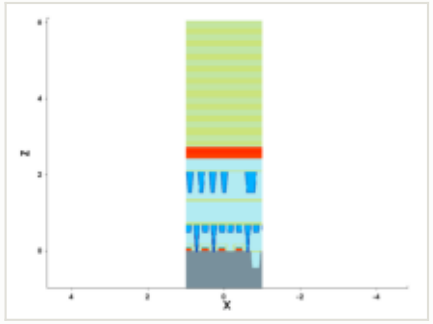

mask for this step

no mask for this step


steps by process area

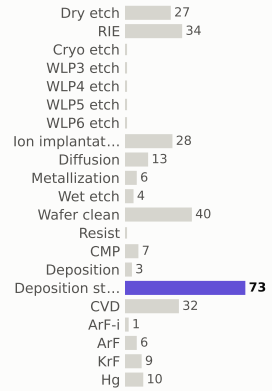

materials deposited (g)



gases emitted (g)




Step #3780: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	277.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

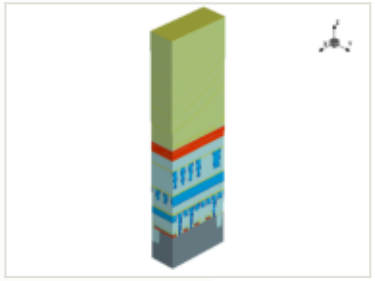


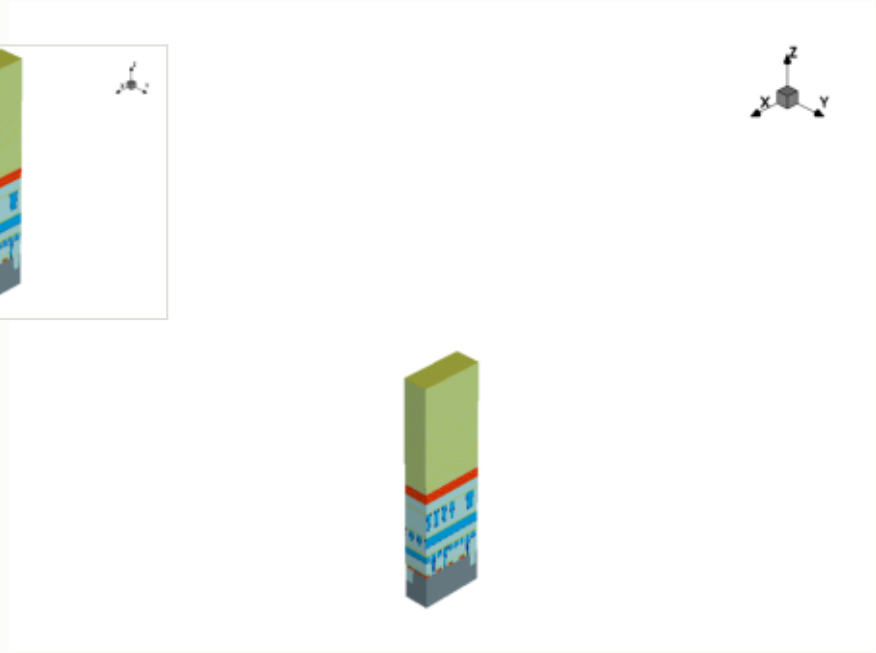

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

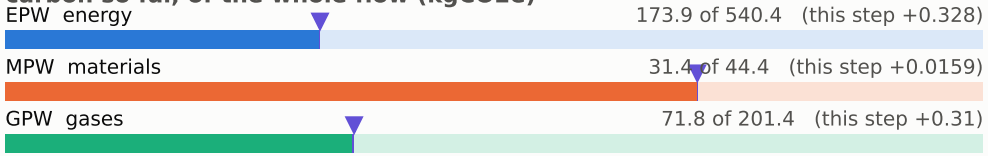


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

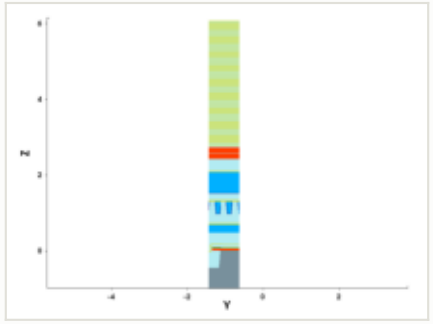


y cut at -1.035 µm

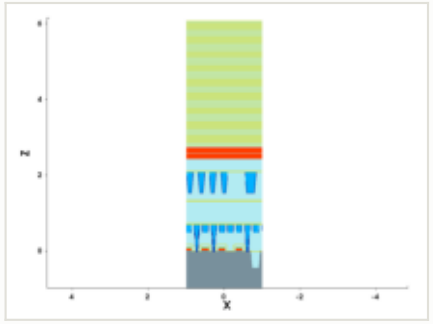

mask for this step

no mask for this step


steps by process area

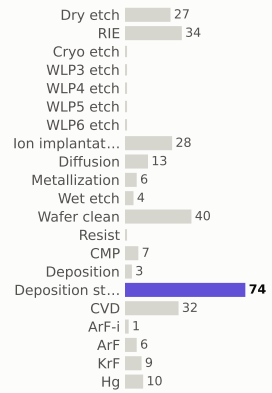

materials deposited (g)



gases emitted (g)




Step #3790: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	277.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

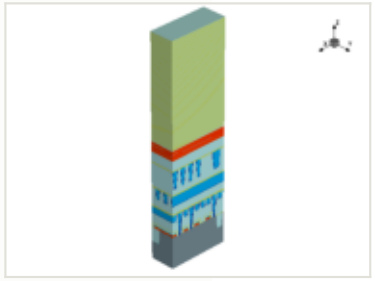




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

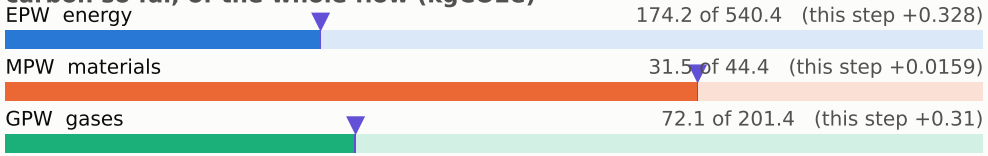


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

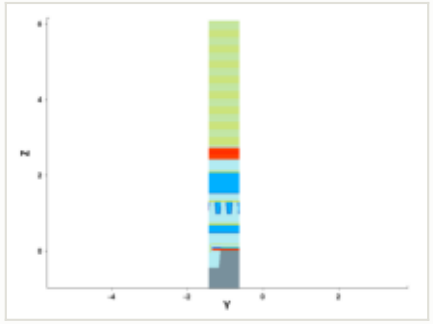


y cut at -1.035 µm

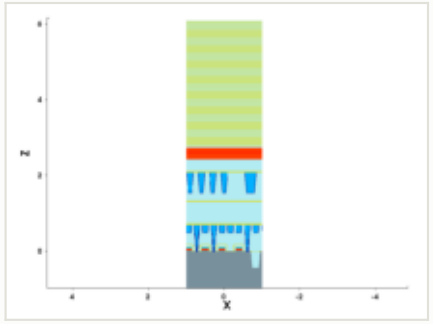


mask for this step

no mask for this step


steps by process area

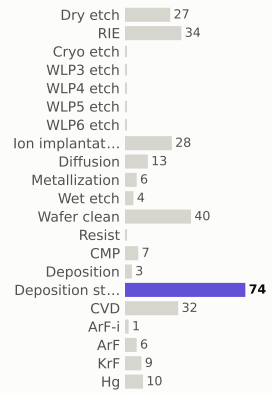

materials deposited (g)

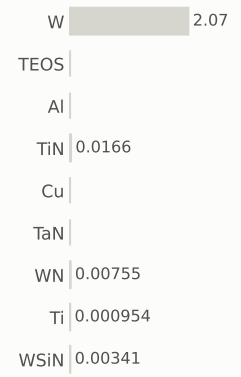

gases emitted (g)




Step #3800: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	278.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

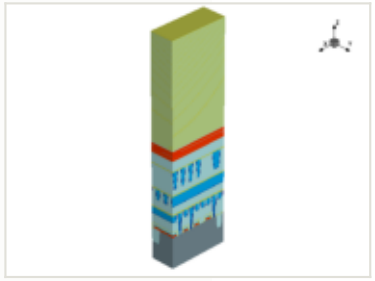





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

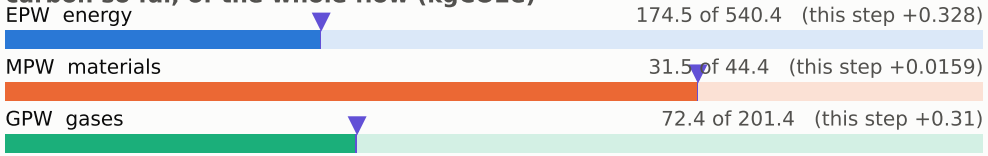


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

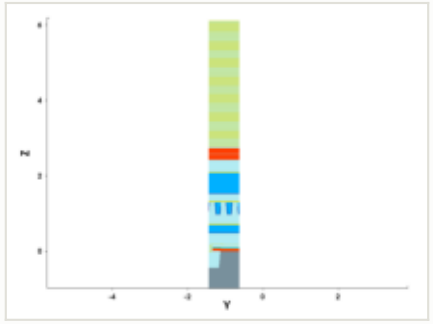


y cut at -1.035 µm

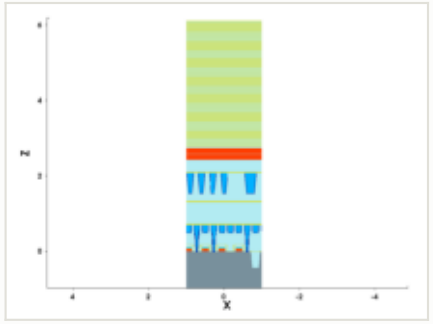


mask for this step

no mask for this step


steps by process area



materials deposited (g)

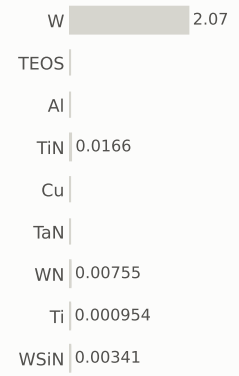

gases emitted (g)




Step #3810: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	279.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

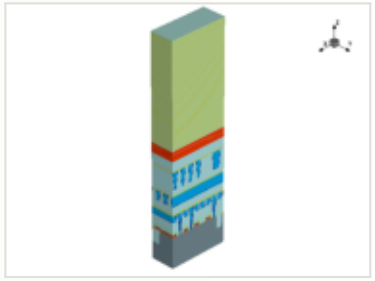





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

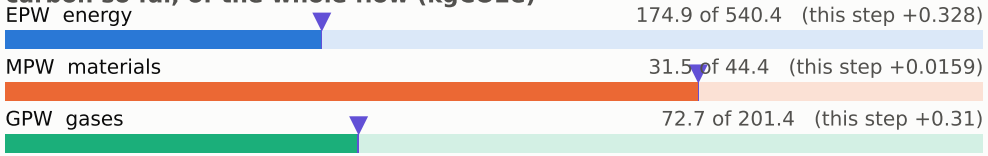


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

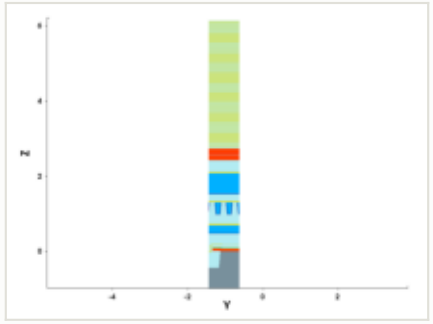


y cut at -1.035 µm

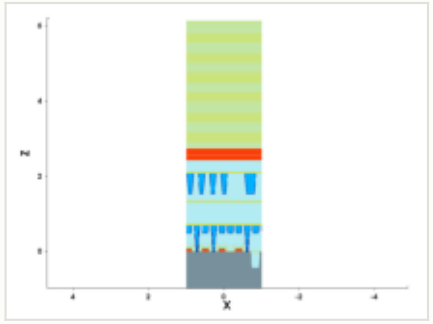


mask for this step

no mask for this step


steps by process area



materials deposited (g)

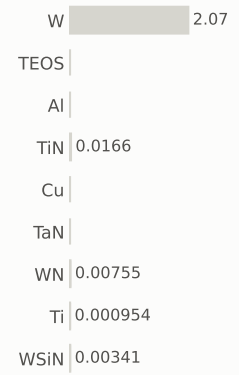

gases emitted (g)




Step #3820: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	279.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

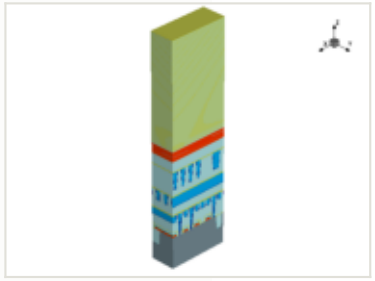


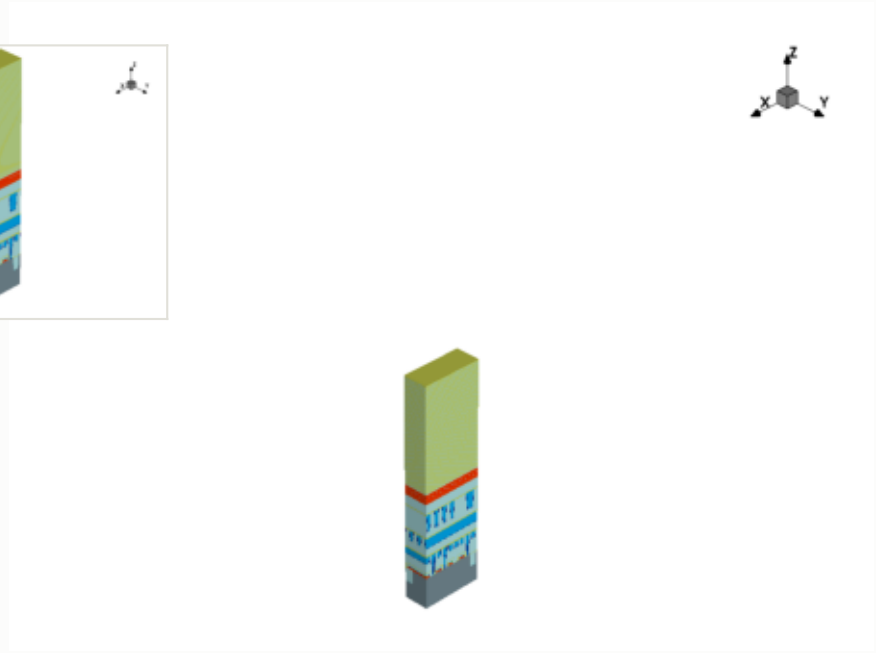


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

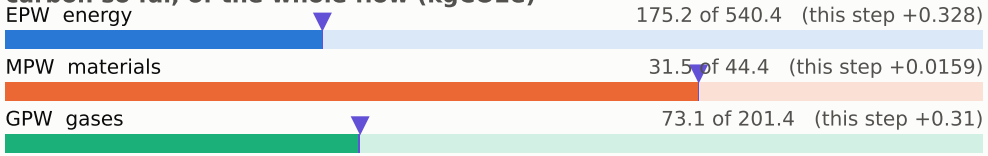


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

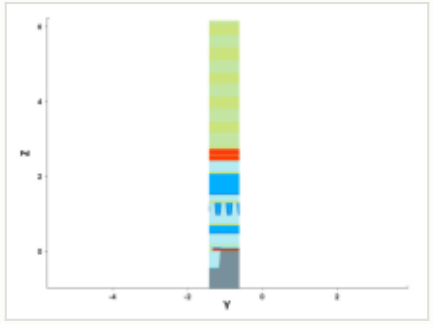


y cut at -1.035 µm

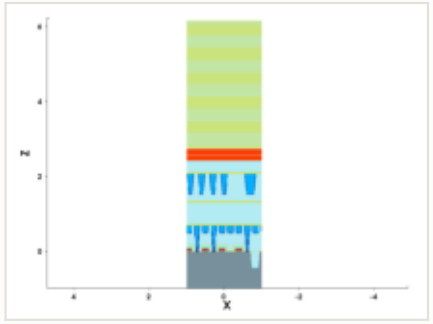


mask for this step

no mask for this step


steps by process area

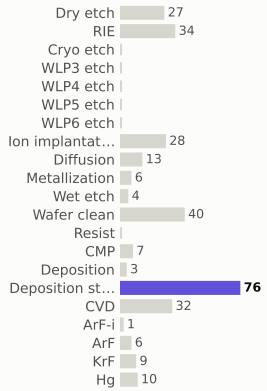

materials deposited (g)

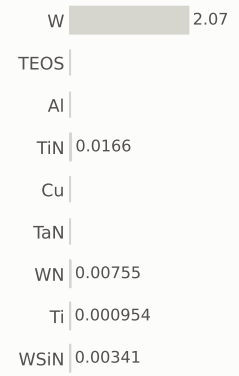

gases emitted (g)




Step #3830: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	280.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

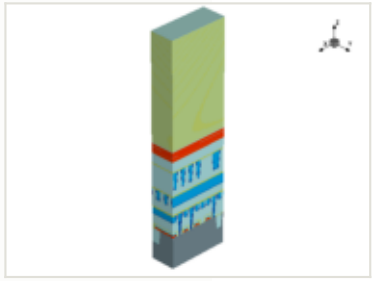


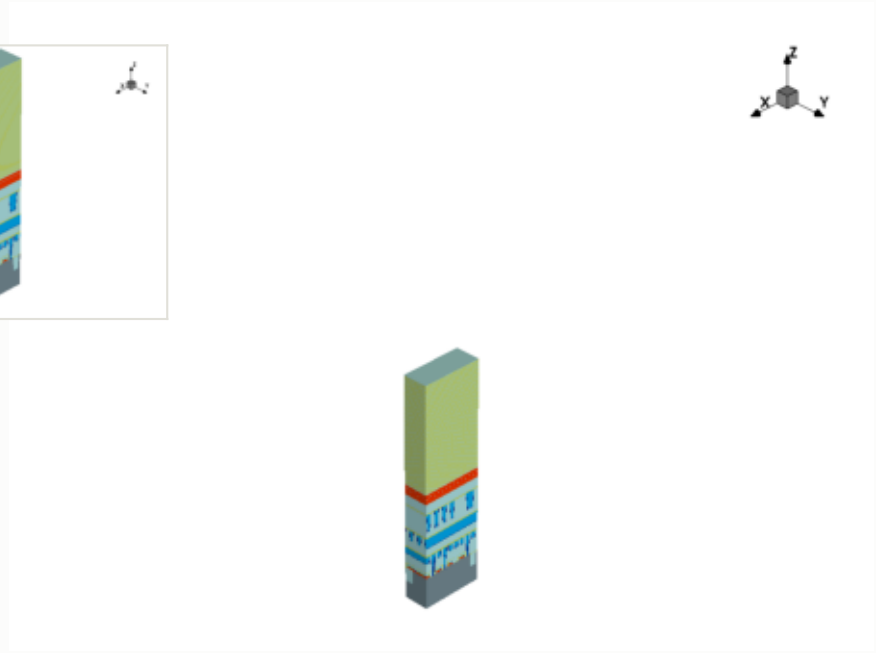

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

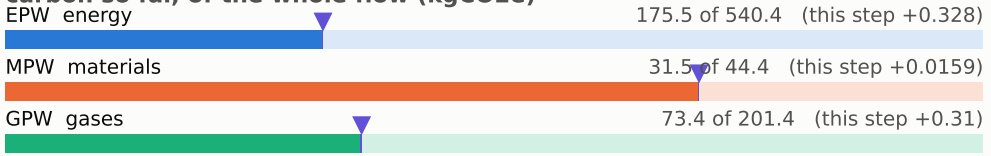


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

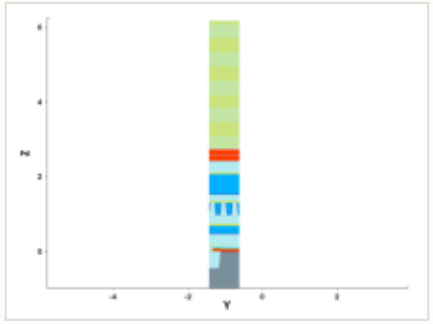


y cut at -1.035 µm

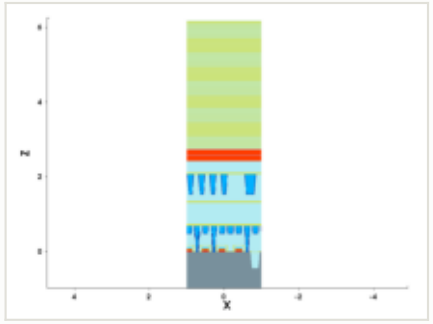

mask for this step

no mask for this step


steps by process area

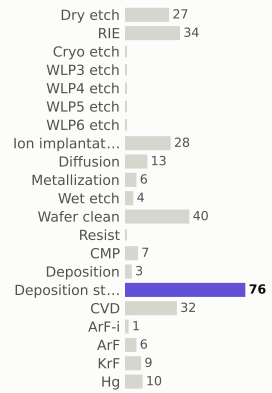

materials deposited (g)



gases emitted (g)




Step #3840: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	281.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

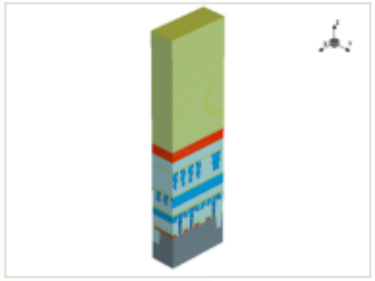




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

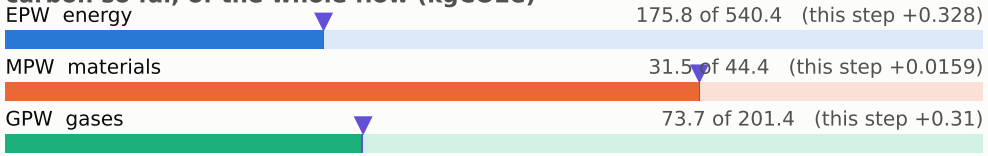


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

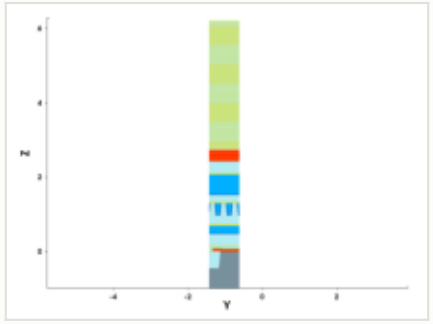


y cut at -1.035 µm

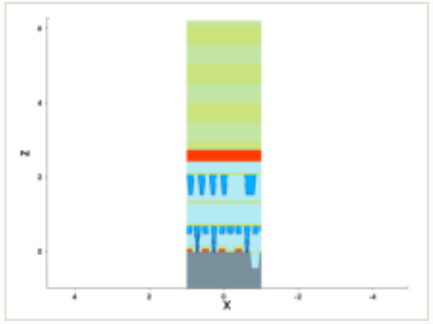


mask for this step

no mask for this step


steps by process area

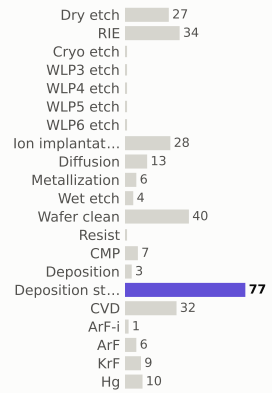

materials deposited (g)

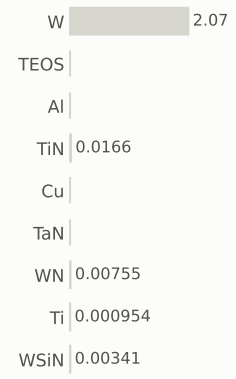

gases emitted (g)




Step #3850: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	281.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

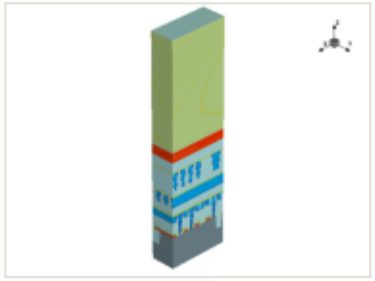




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

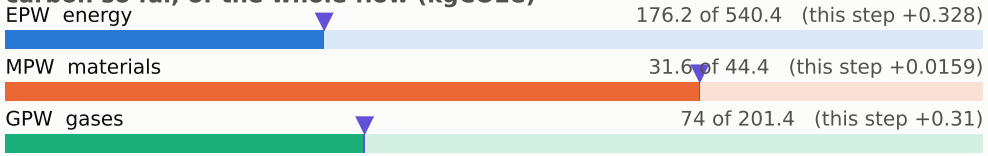


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

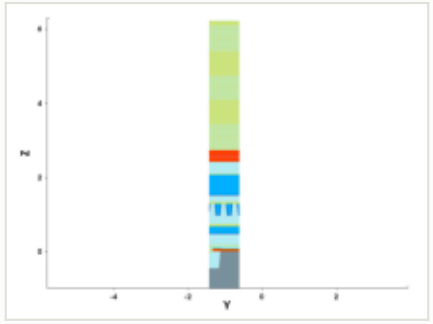


y cut at -1.035 µm

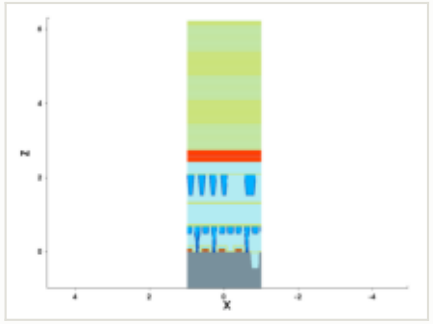


mask for this step

no mask for this step


steps by process area

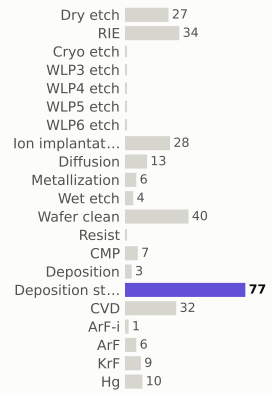

materials deposited (g)

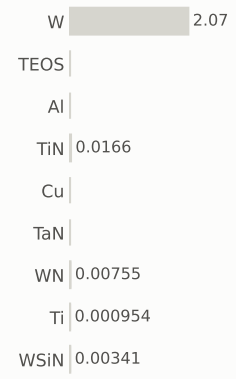

gases emitted (g)




Step #3860: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	282.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

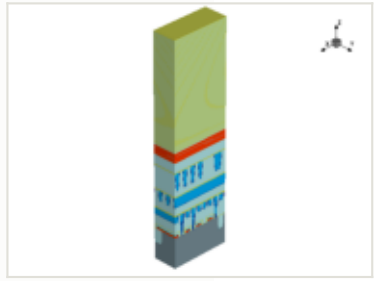


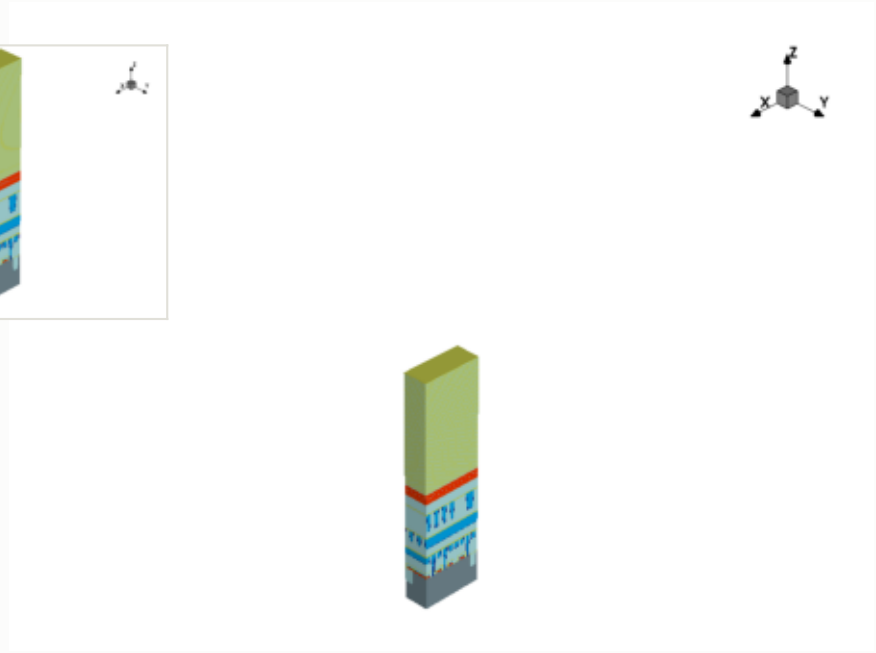

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

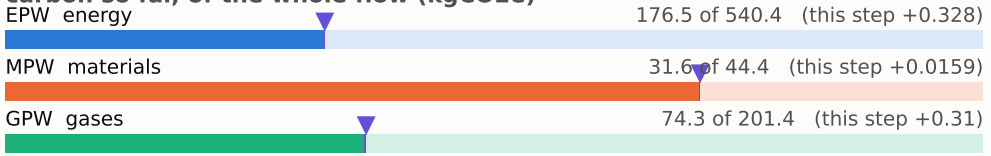


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

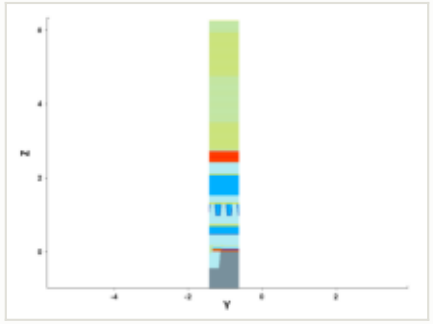


y cut at -1.035 µm

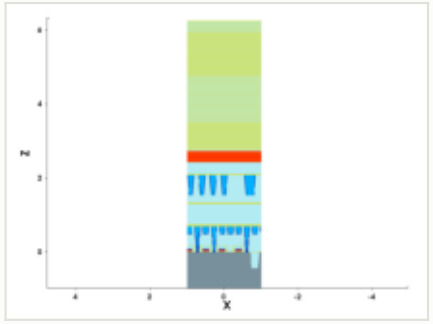

mask for this step

no mask for this step


steps by process area

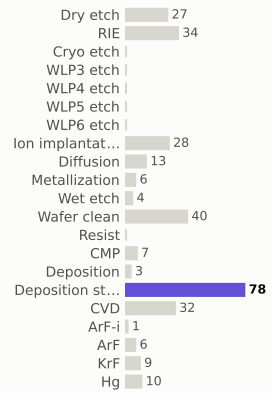

materials deposited (g)



gases emitted (g)




Step #3870: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	283.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

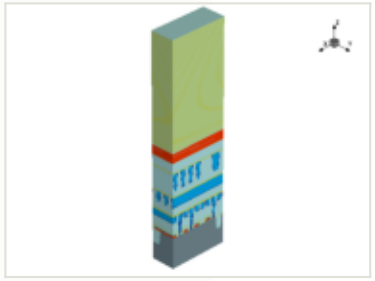


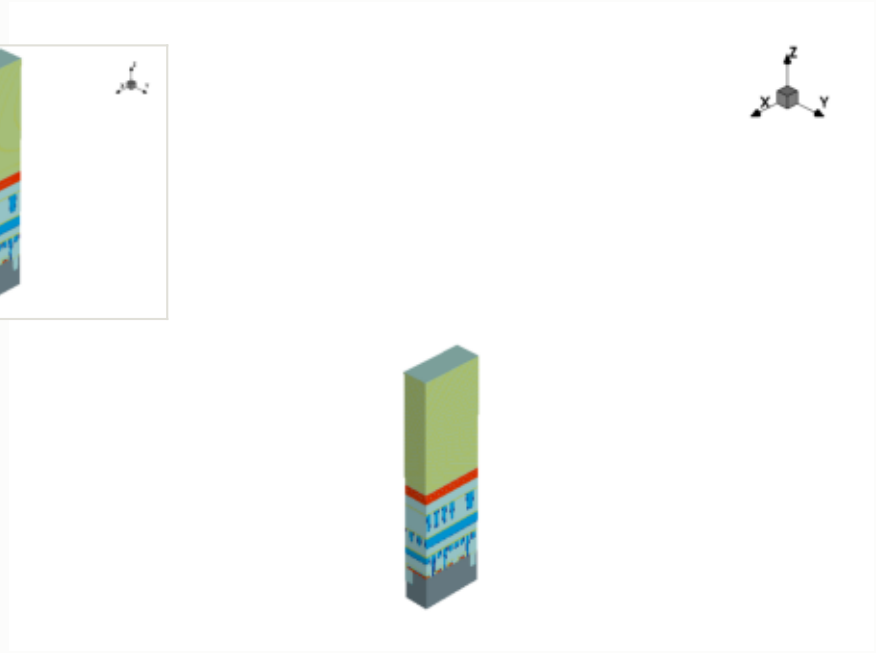

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

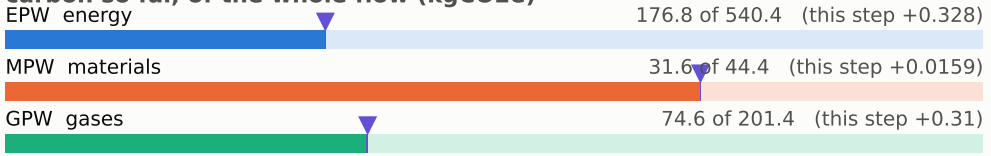


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

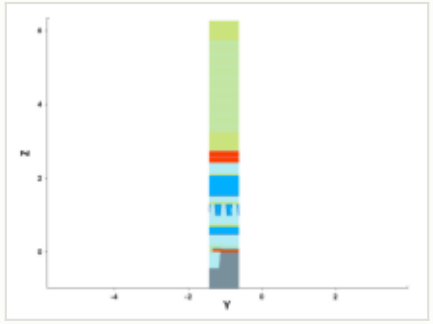


y cut at -1.035 µm

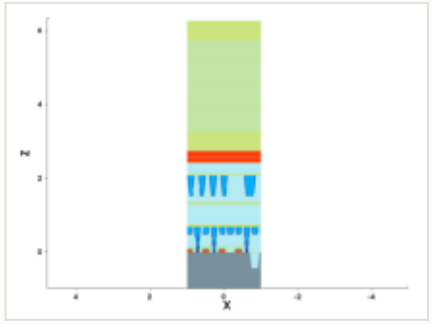

mask for this step

no mask for this step


steps by process area

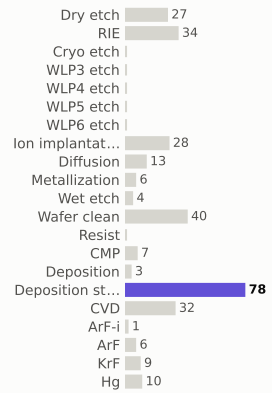

materials deposited (g)



gases emitted (g)




Step #3880: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	283.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

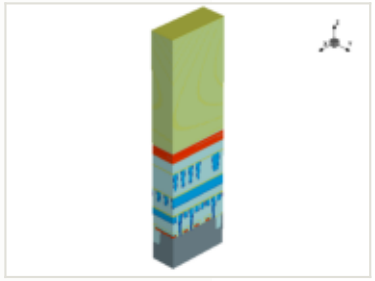


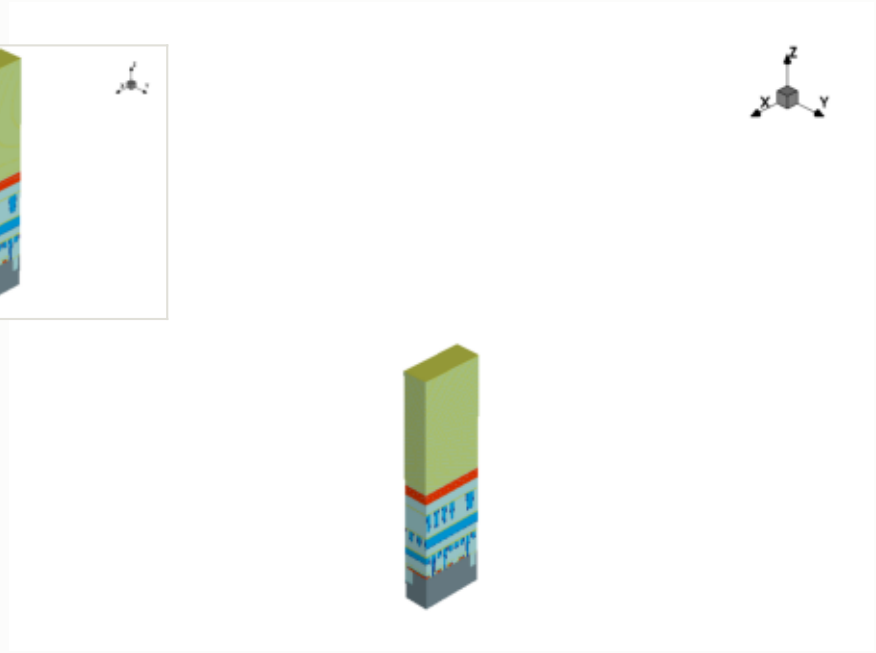

x cut at 0.000 µm

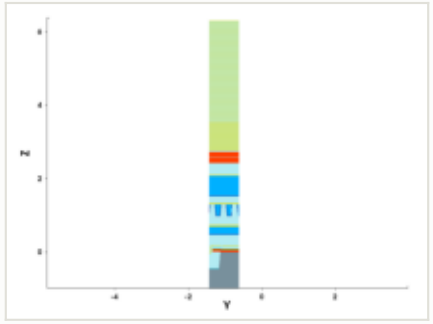

y cut at -1.035 µm

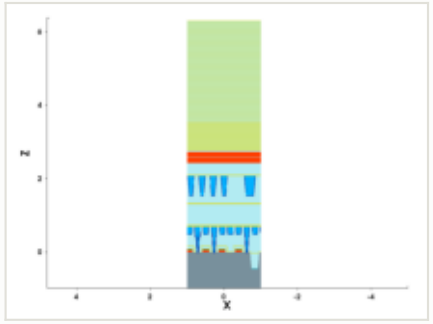


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

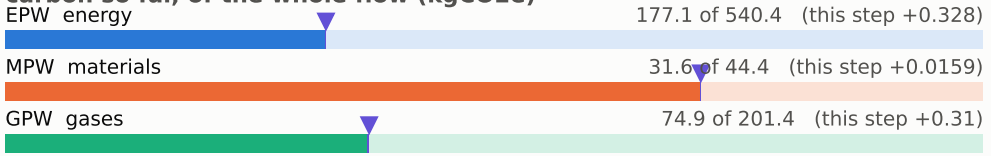

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

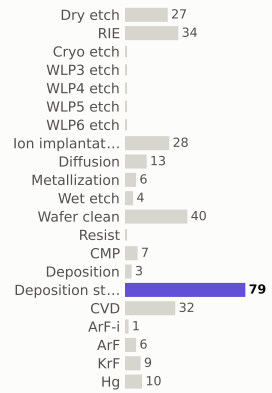

materials deposited (g)



gases emitted (g)




Step #3890: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	284.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

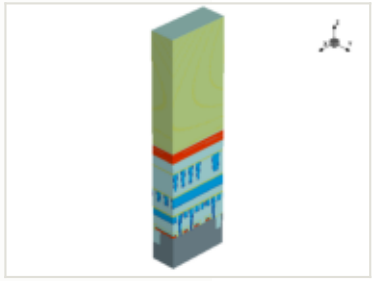


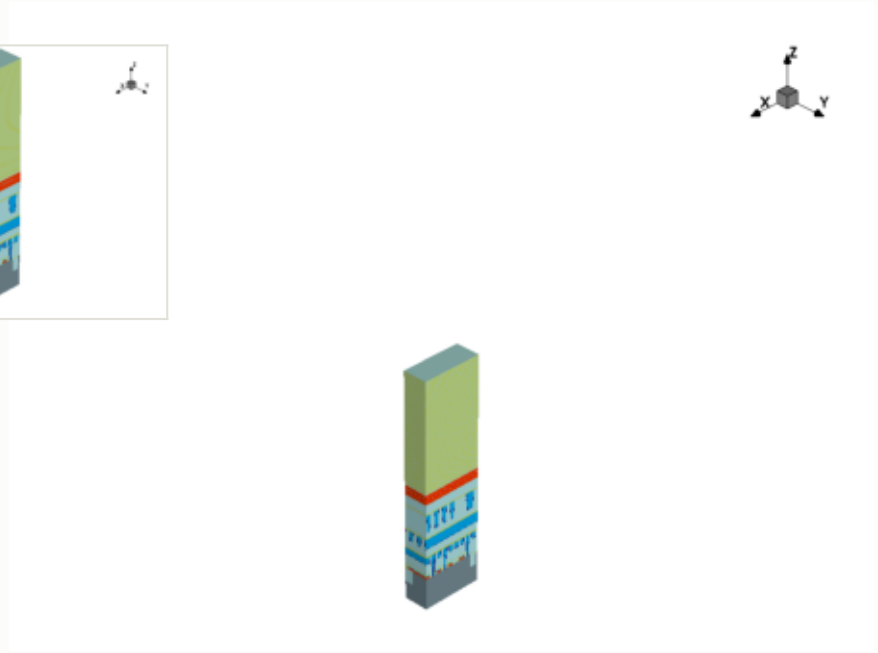

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

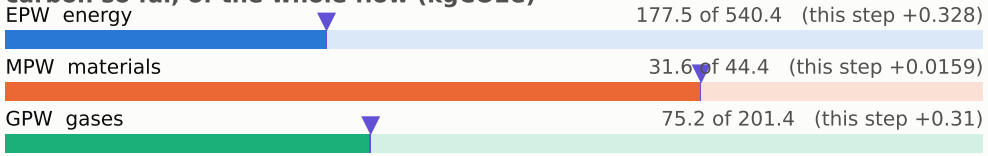


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

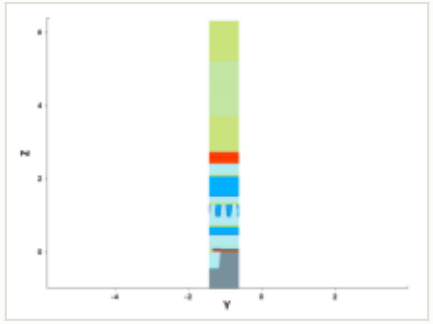


y cut at -1.035 µm

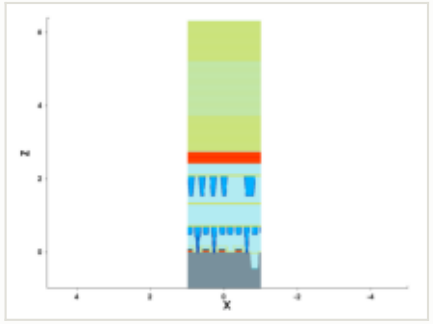

mask for this step

no mask for this step


steps by process area

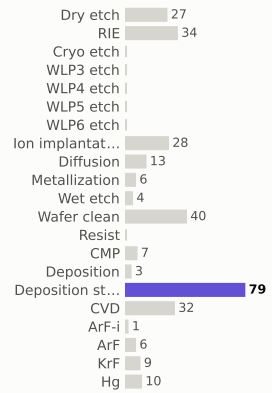

materials deposited (g)



gases emitted (g)




Step #3900: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	285.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

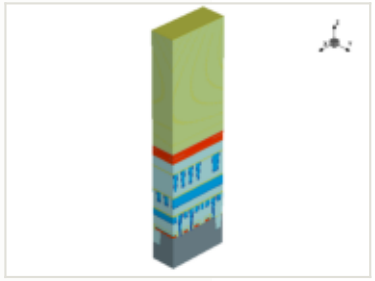




x cut at 0.000 µm

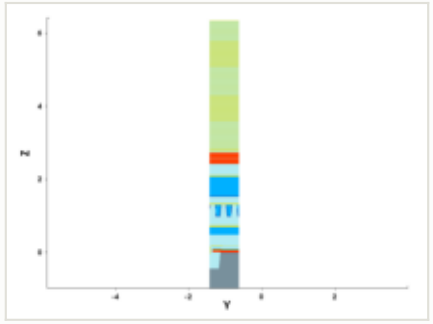

y cut at -1.035 µm

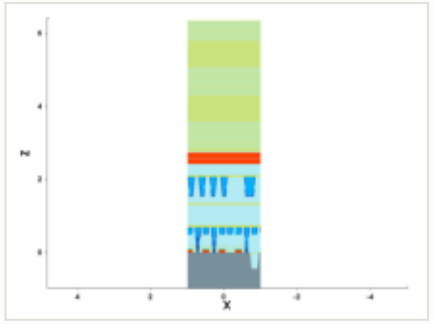


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

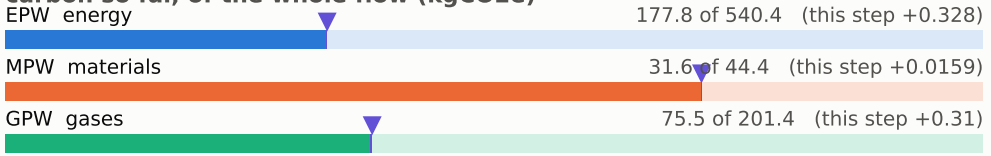

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

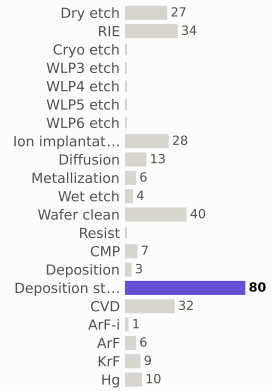

materials deposited (g)



gases emitted (g)

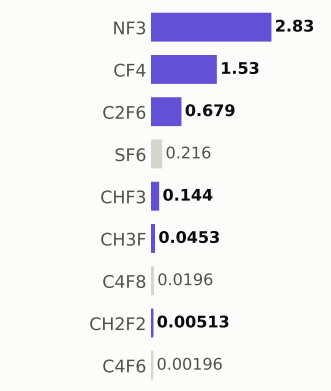


Step #3910: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	285.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

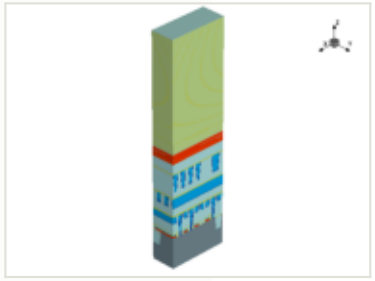


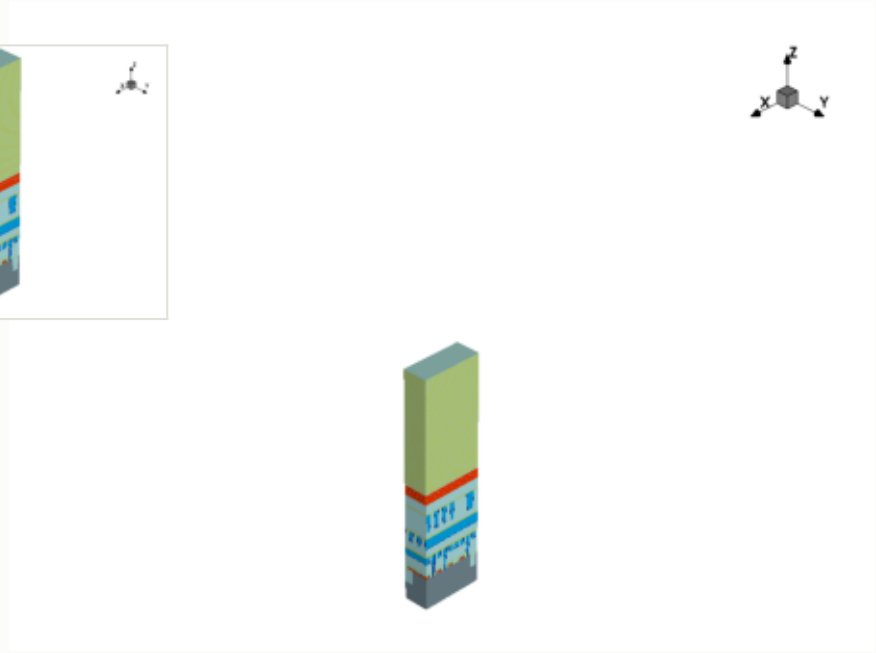

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

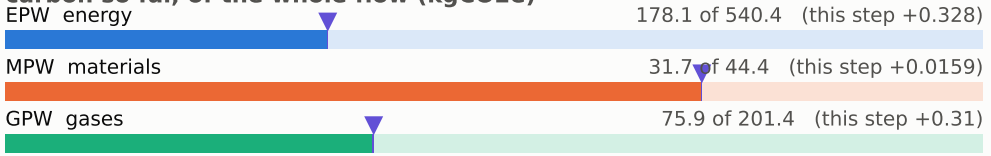


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

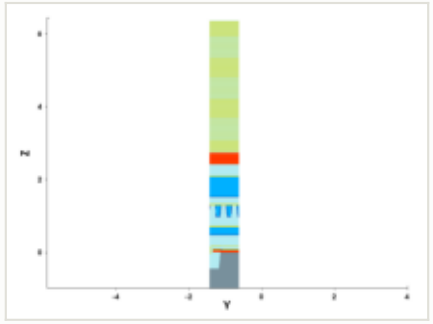


y cut at -1.035 µm

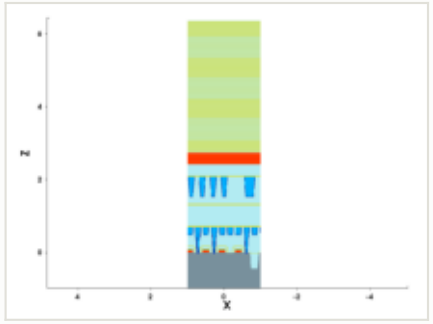


mask for this step

no mask for this step


steps by process area

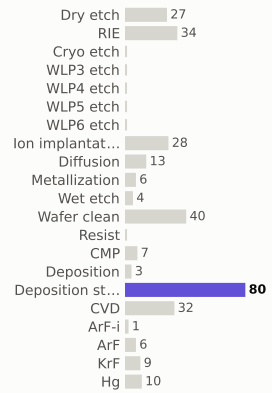

materials deposited (g)

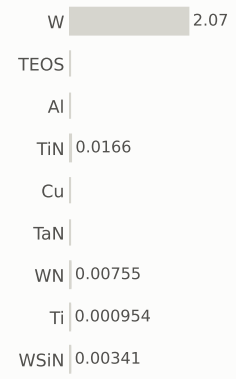

gases emitted (g)




Step #3920: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	286.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

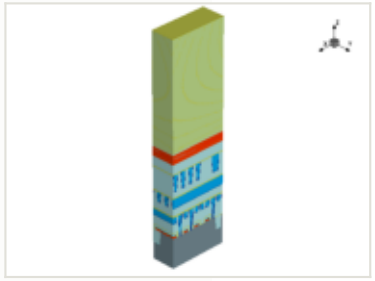


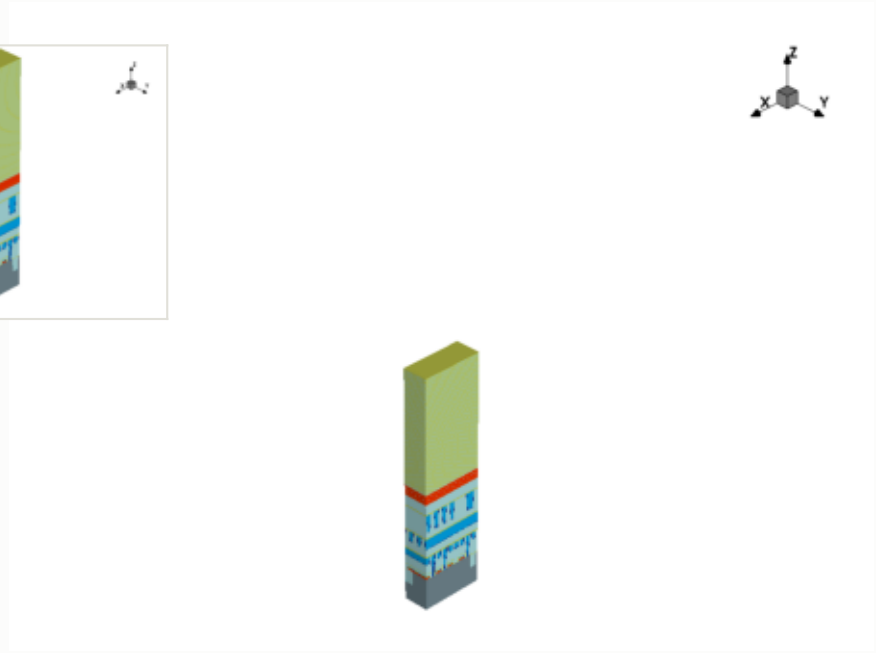

x cut at 0.000 µm

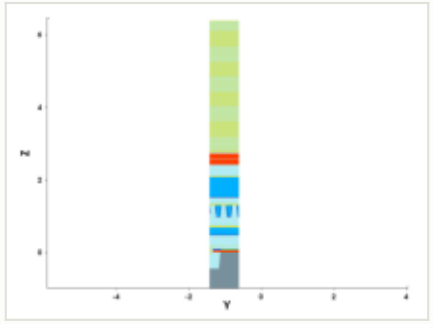

y cut at -1.035 µm

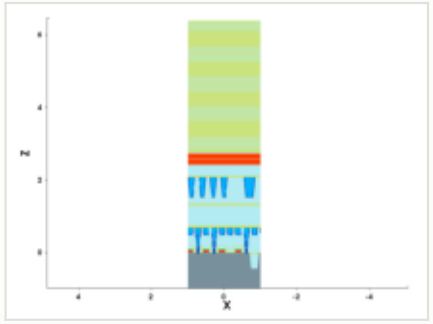


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

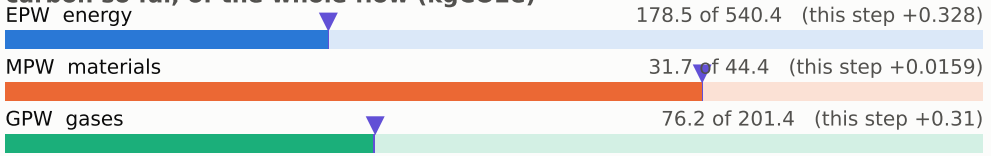


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

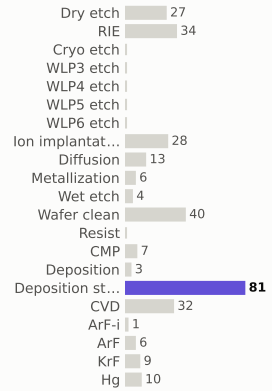

materials deposited (g)

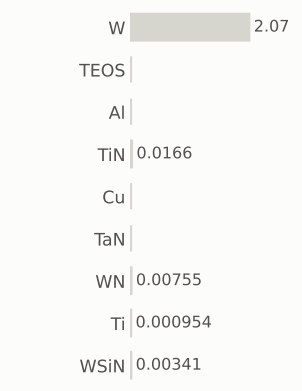

gases emitted (g)

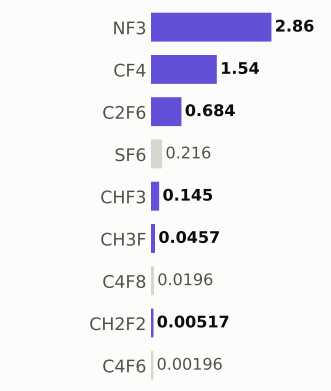


Step #3930: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	286.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

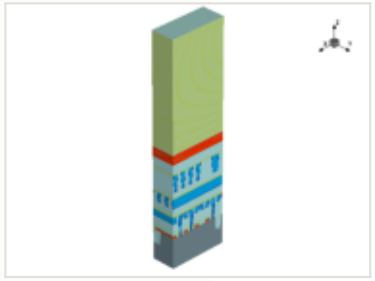


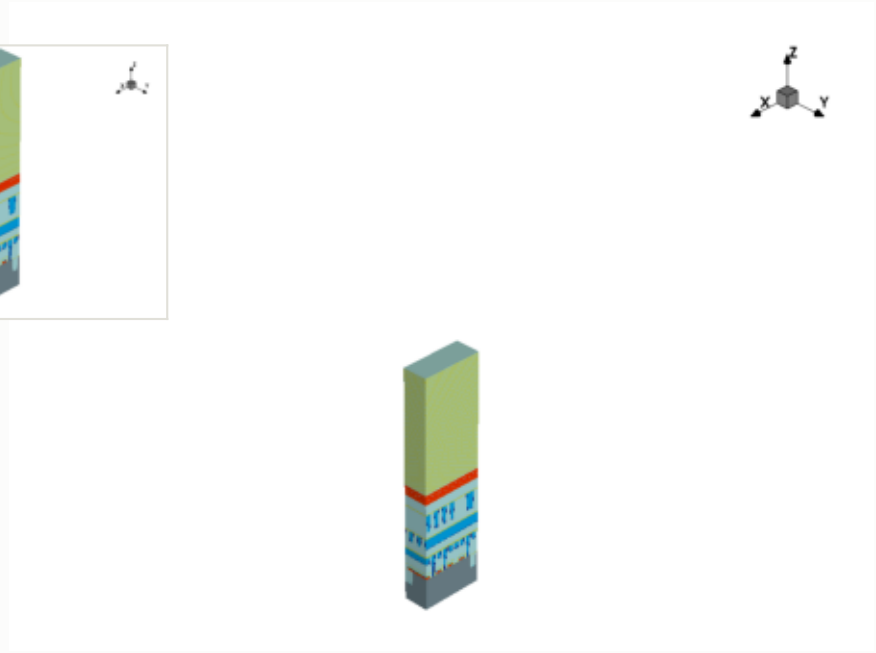

x cut at 0.000 µm

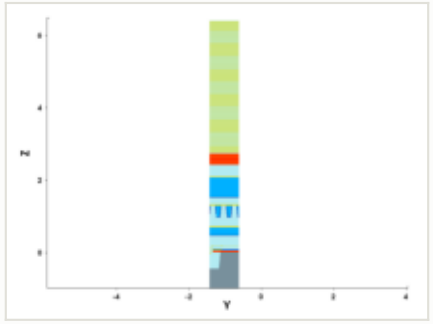

y cut at -1.035 µm

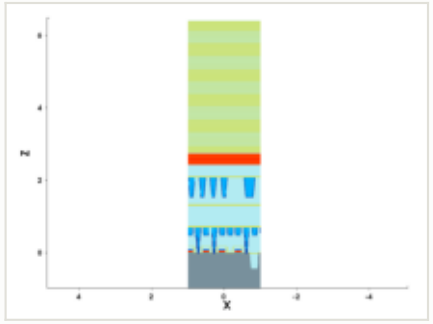


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

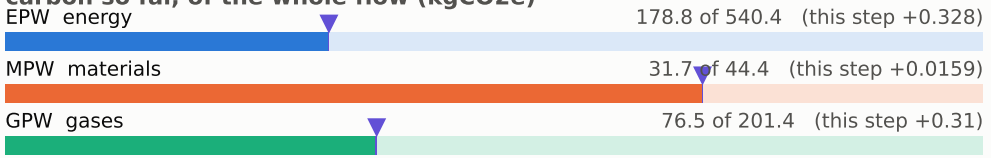

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

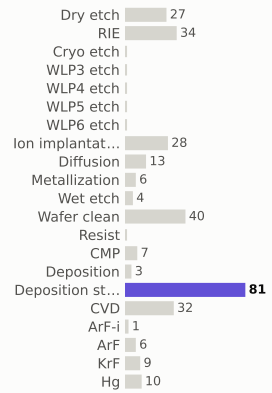

materials deposited (g)



gases emitted (g)

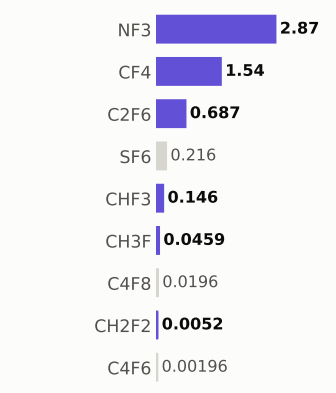


Step #3940: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	287.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

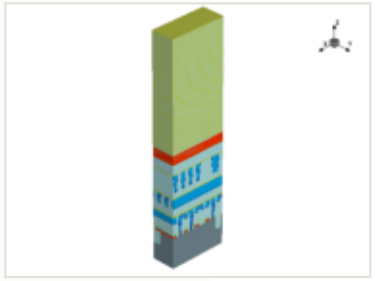


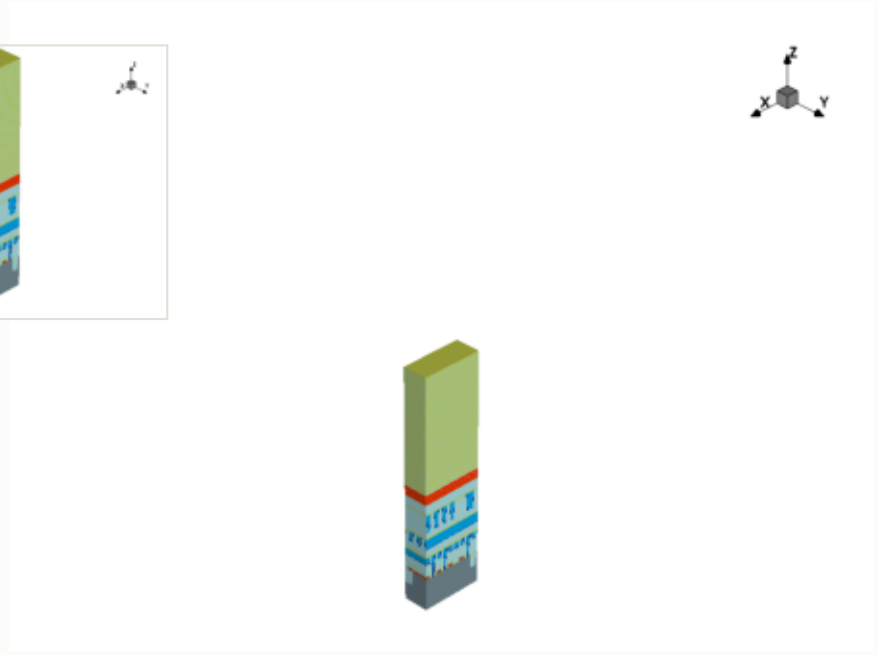

x cut at 0.000 µm

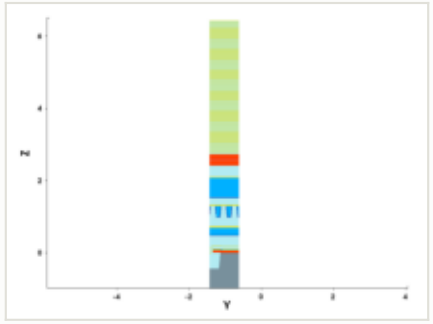

y cut at -1.035 µm

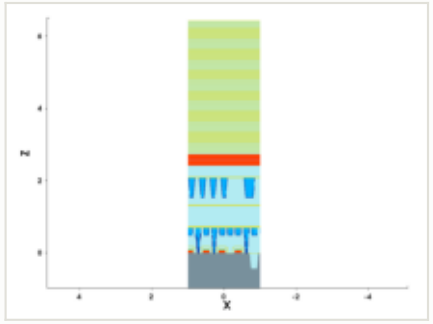


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

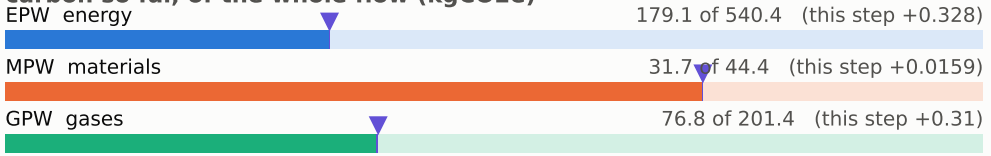

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

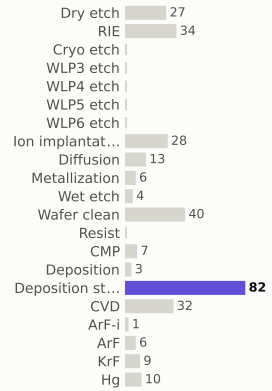

materials deposited (g)



gases emitted (g)




Step #3950: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	288.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

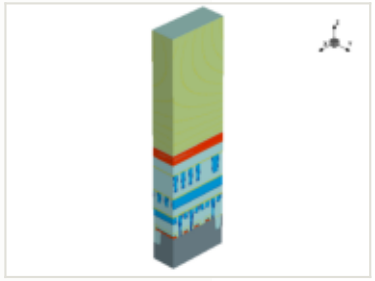


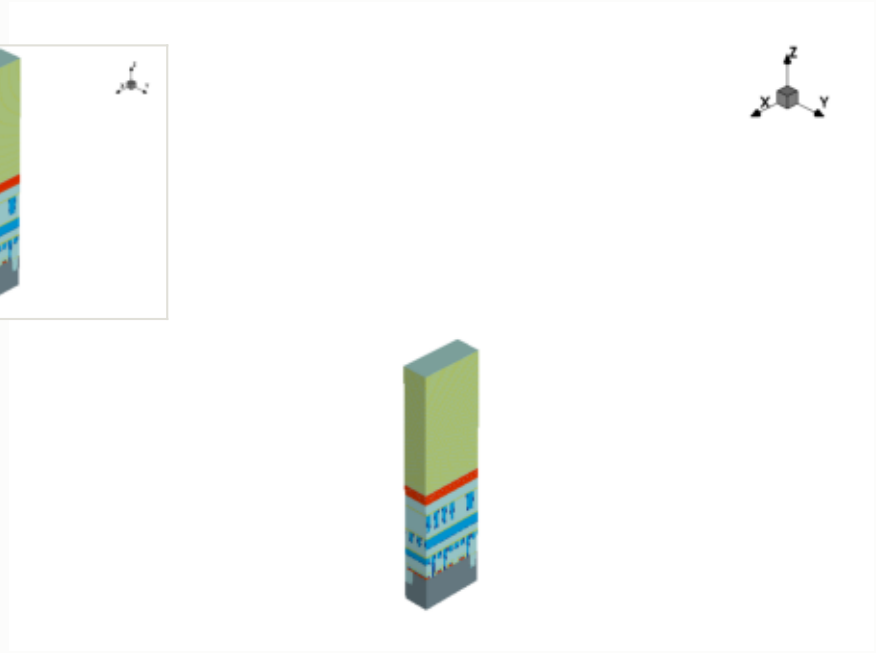

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

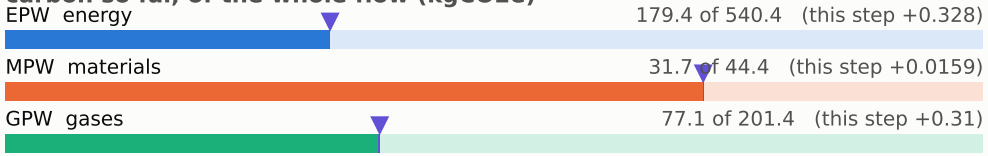


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

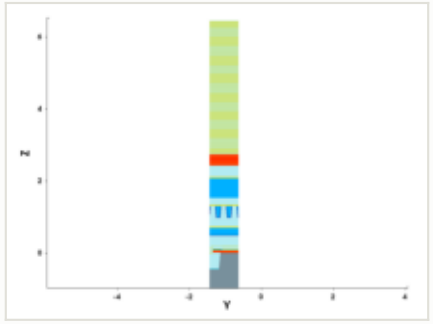


y cut at -1.035 µm

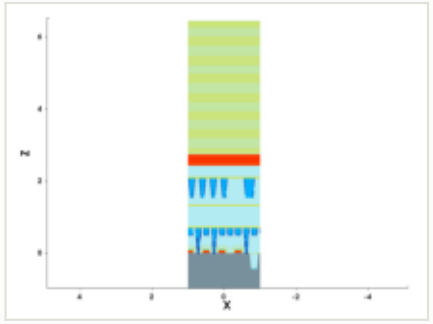

mask for this step

no mask for this step


steps by process area

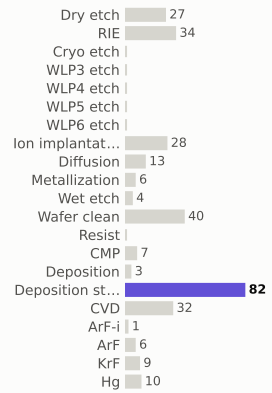

materials deposited (g)



gases emitted (g)




Step #3960: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	288.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

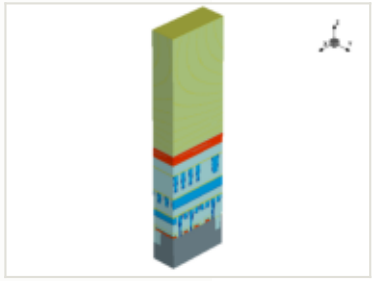


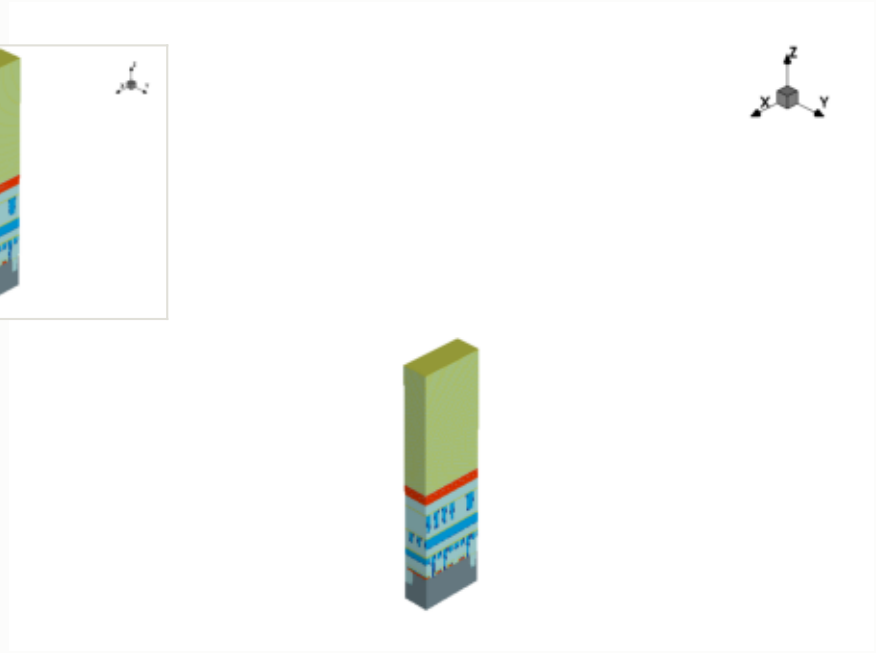

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

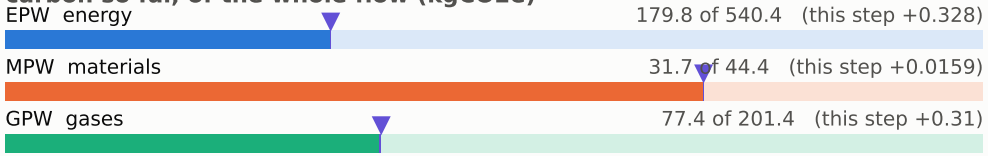


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

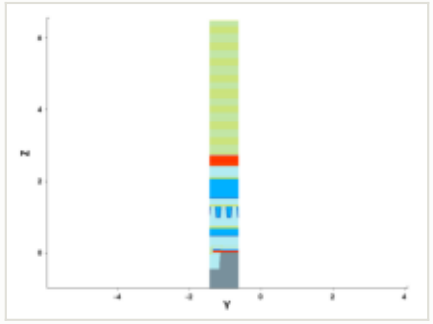


y cut at -1.035 µm

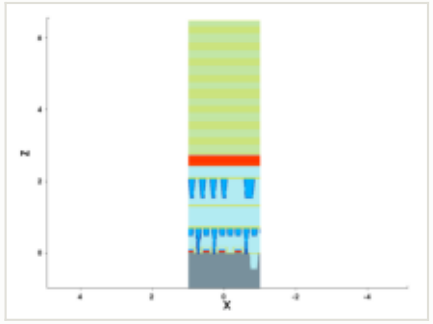

mask for this step

no mask for this step


steps by process area

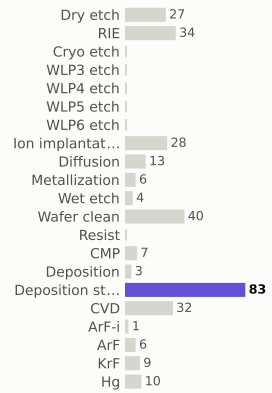

materials deposited (g)



gases emitted (g)




Step #3970: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	289.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

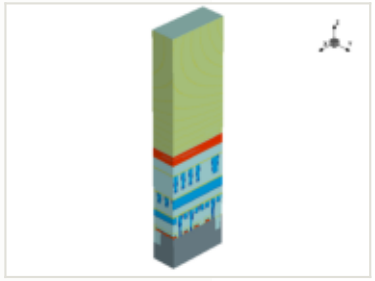


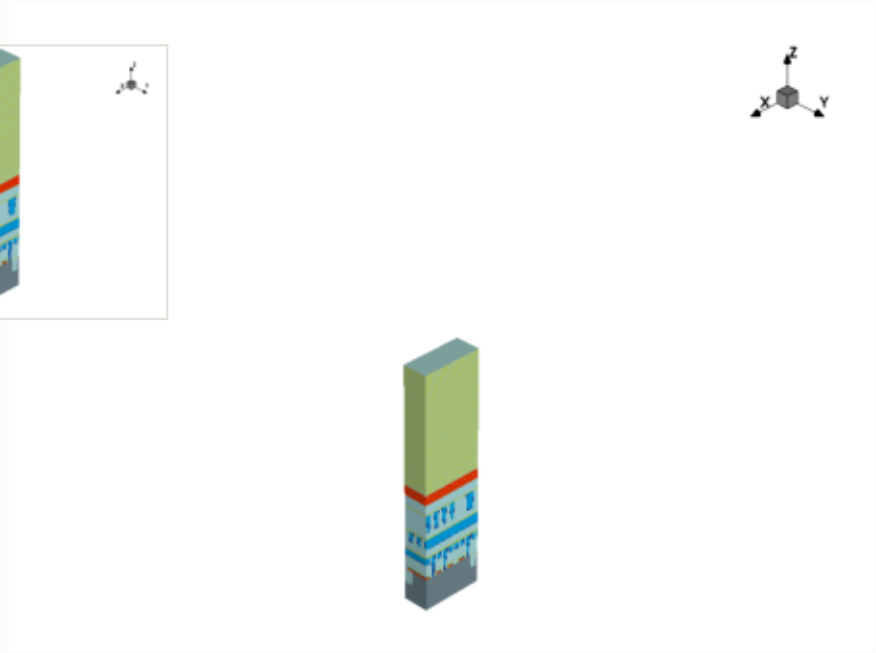

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

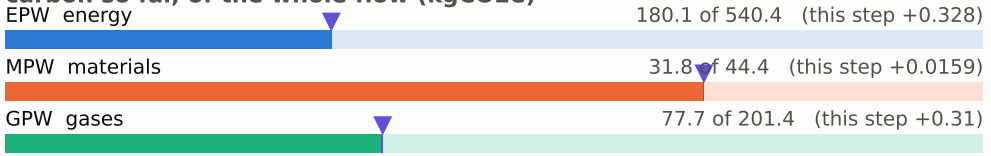


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

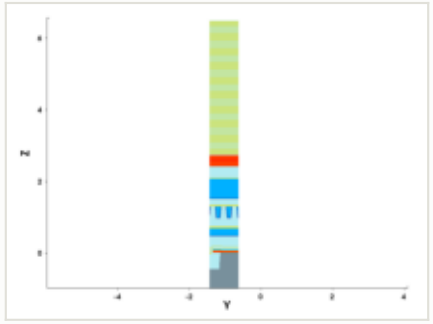


y cut at -1.035 µm

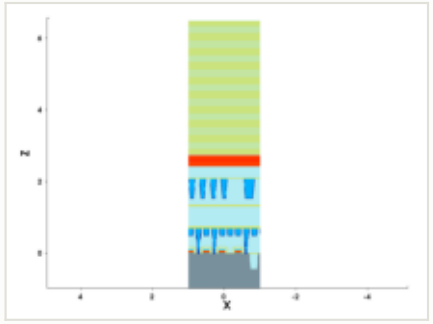

mask for this step

no mask for this step


steps by process area

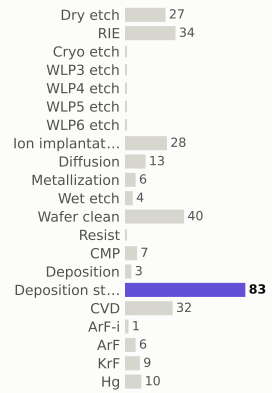

materials deposited (g)



gases emitted (g)




Step #3980: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	290.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

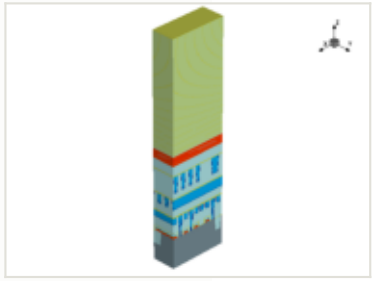




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

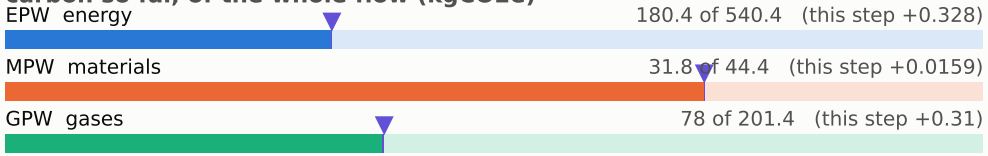


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

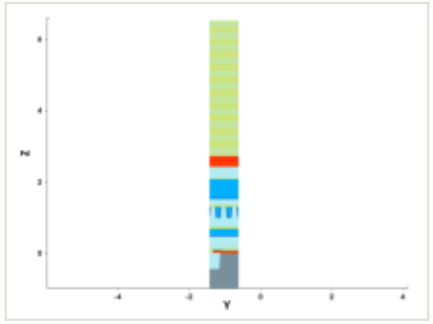


y cut at -1.035 µm

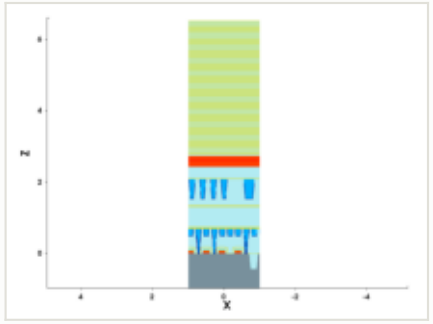

mask for this step

no mask for this step


steps by process area

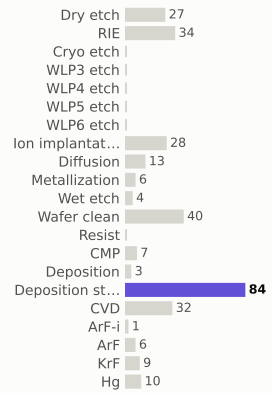

materials deposited (g)



gases emitted (g)




Step #3990: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	290.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

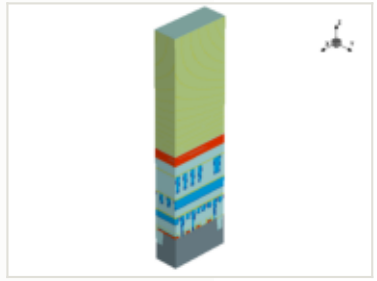


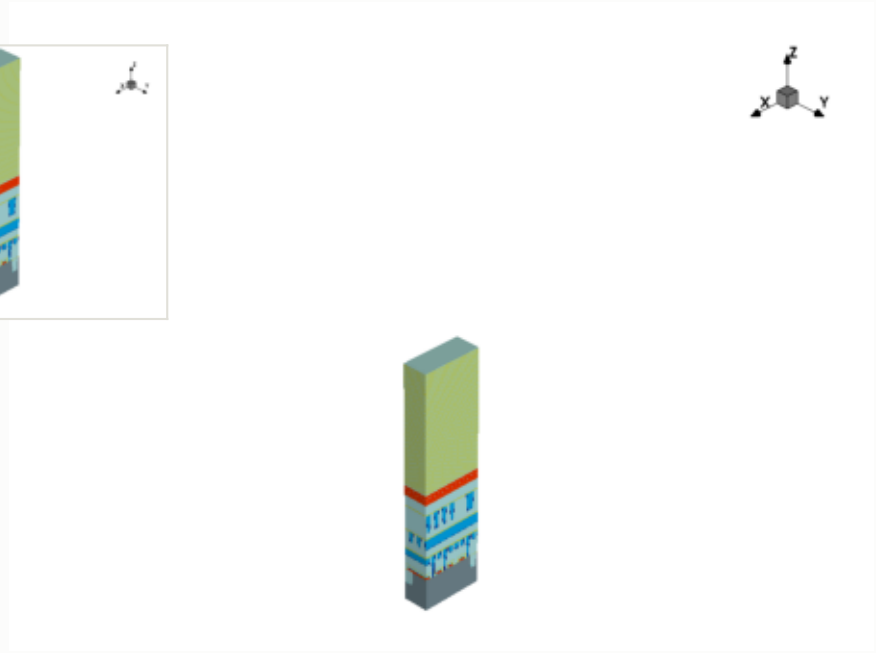

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

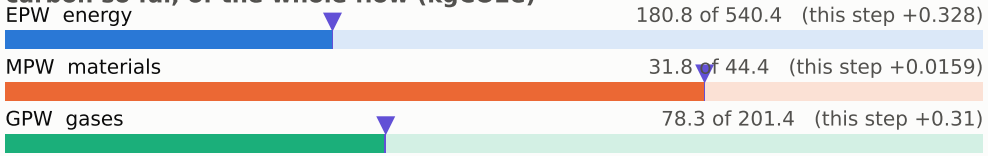


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

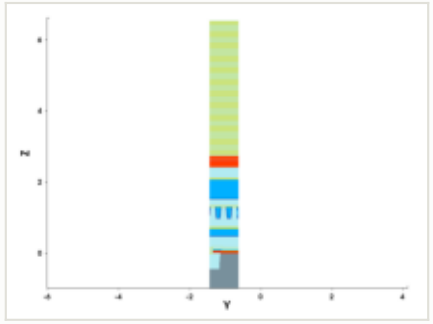


y cut at -1.035 µm

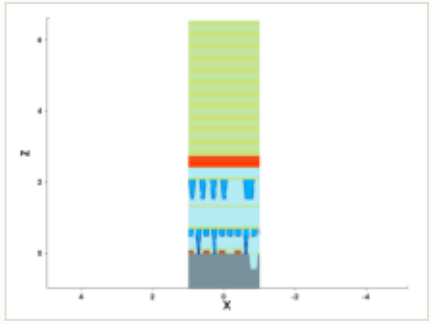


mask for this step

no mask for this step


steps by process area

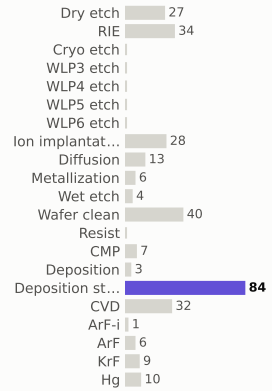

materials deposited (g)

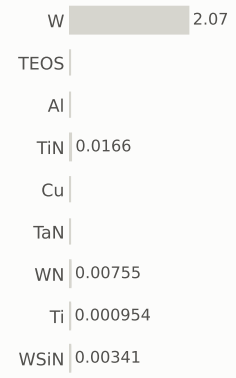

gases emitted (g)




Step #4000: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	291.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

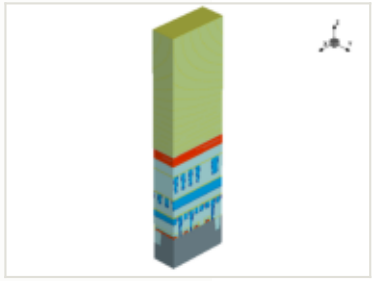


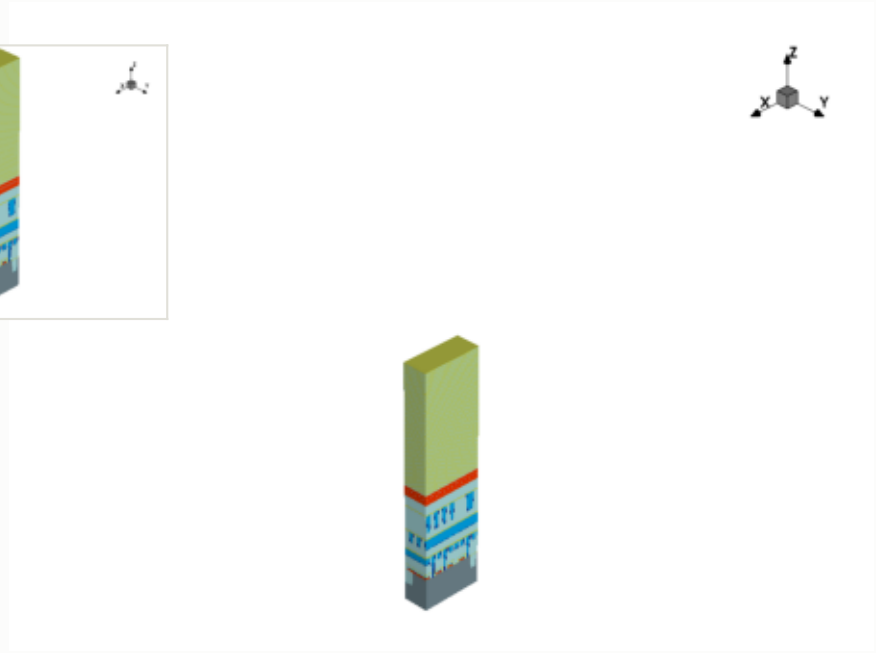

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

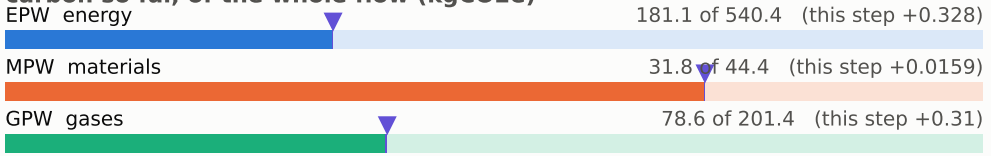


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

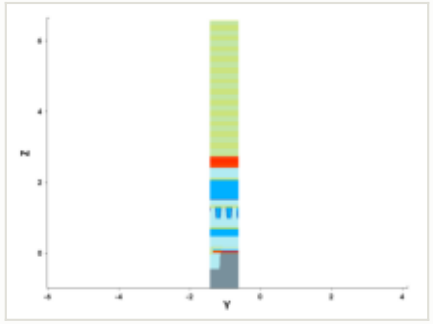


y cut at -1.035 µm

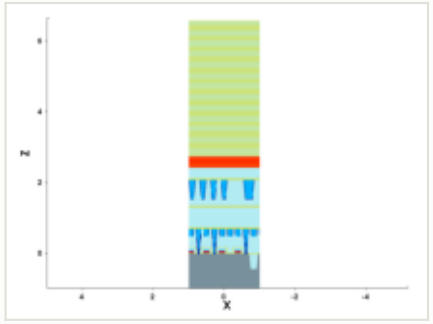


mask for this step

no mask for this step


steps by process area

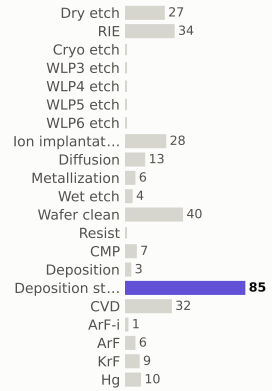

materials deposited (g)

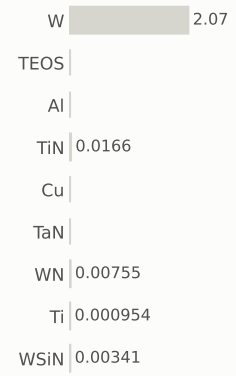

gases emitted (g)




Step #4010: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	292.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

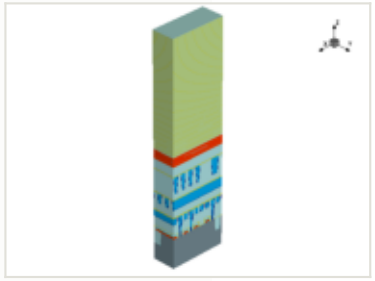


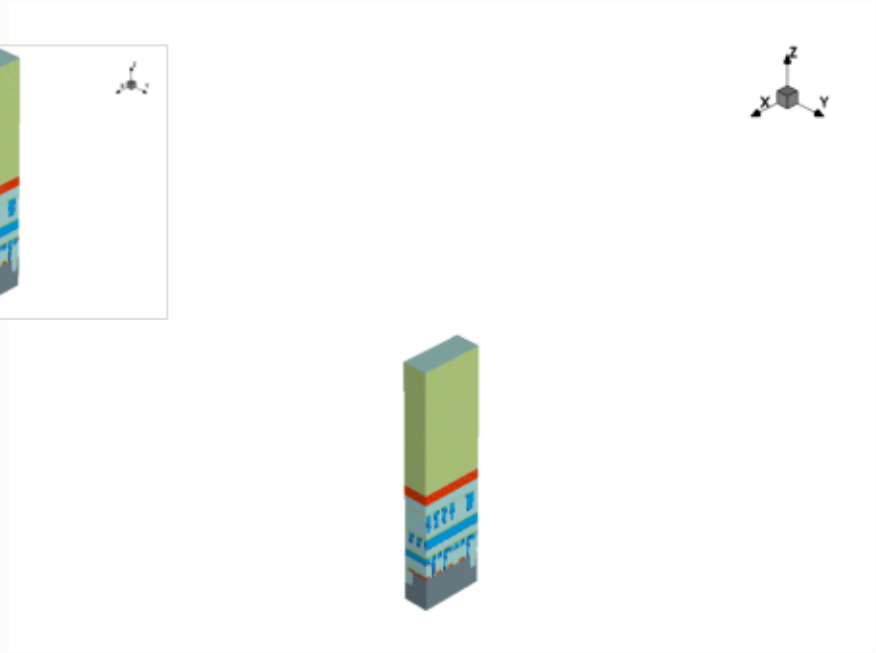

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

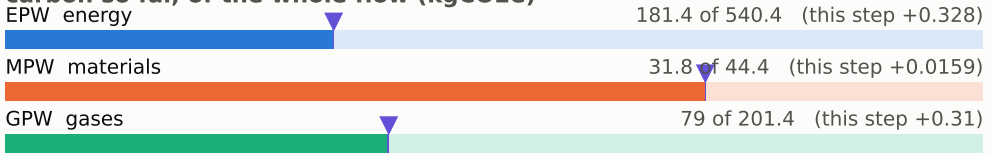


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

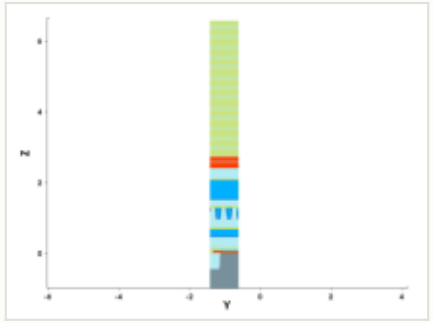


y cut at -1.035 µm

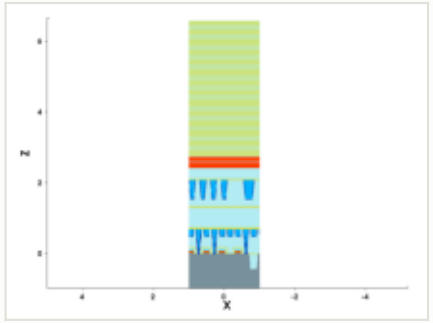


mask for this step

no mask for this step


steps by process area

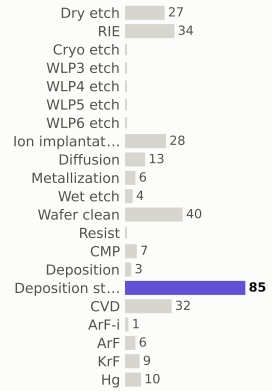

materials deposited (g)

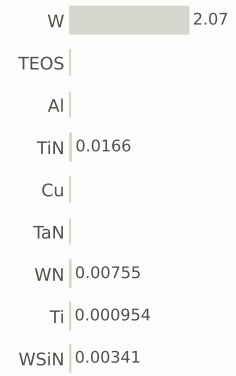

gases emitted (g)




Step #4020: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	292.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

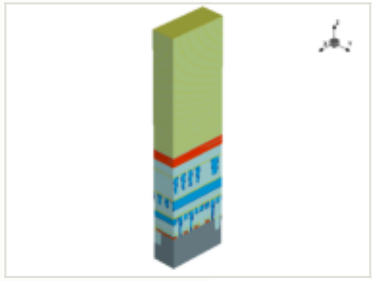


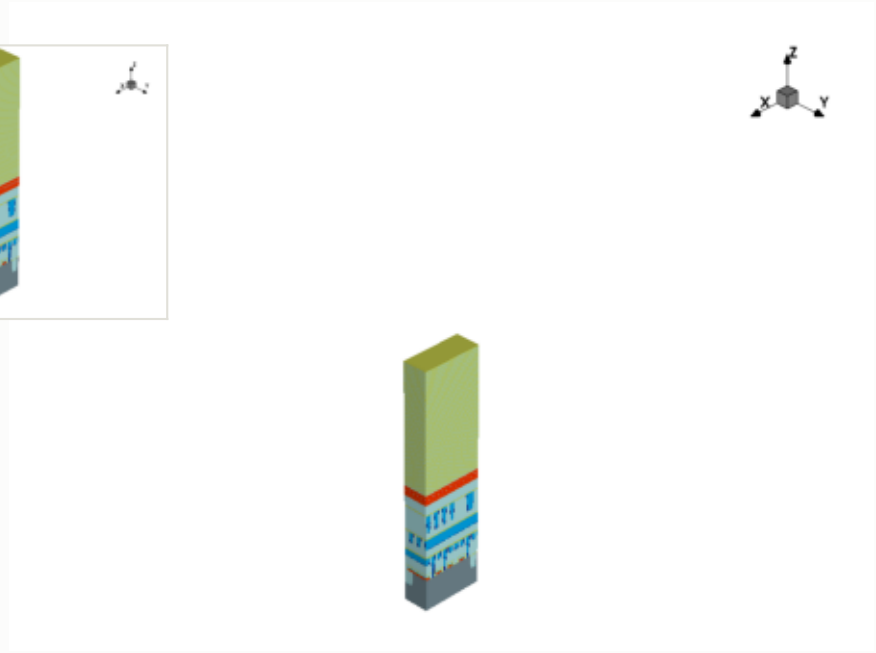

x cut at 0.000 µm

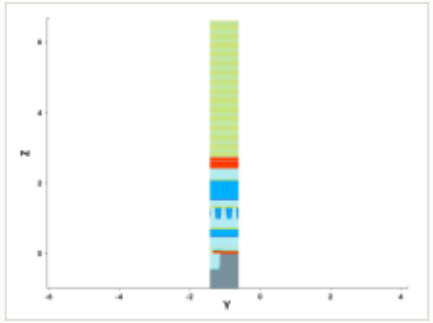

y cut at -1.035 µm

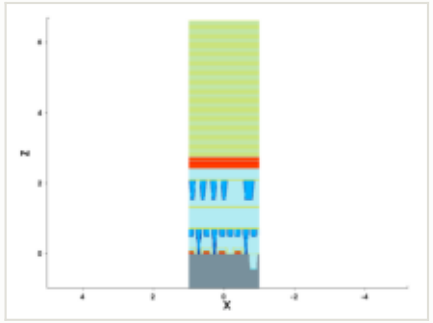


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

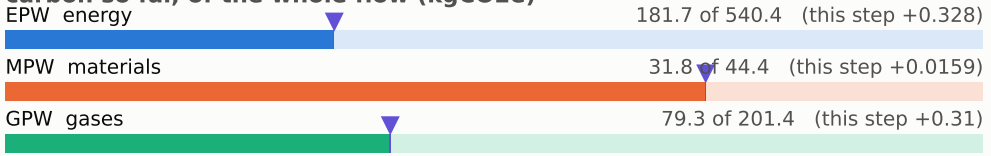


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

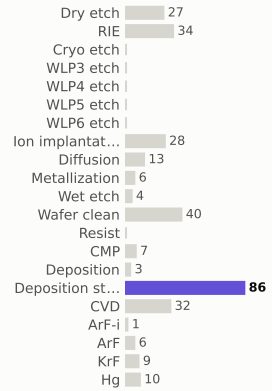

materials deposited (g)

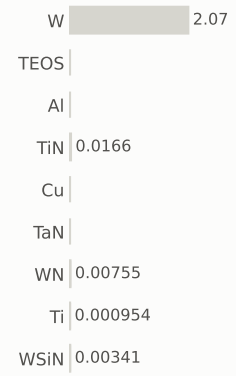

gases emitted (g)




Step #4030: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	293.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

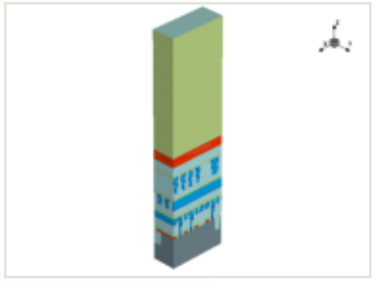


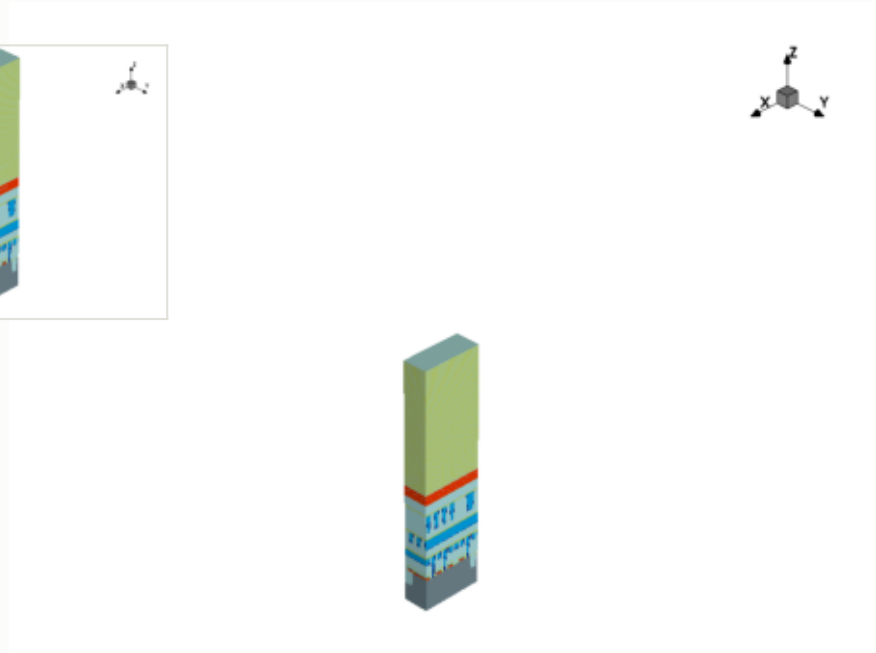

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

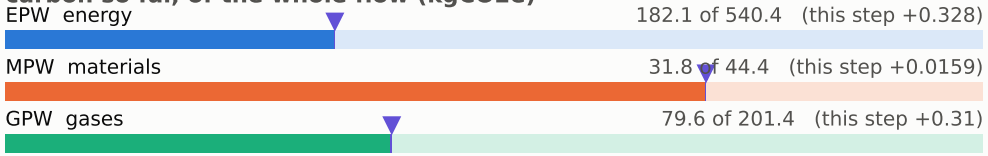


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

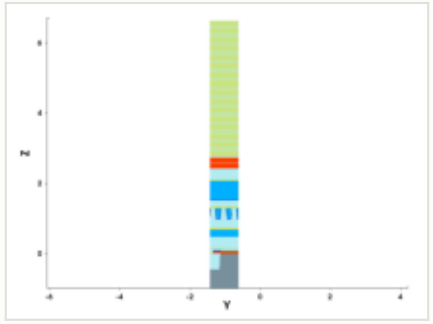


y cut at -1.035 µm

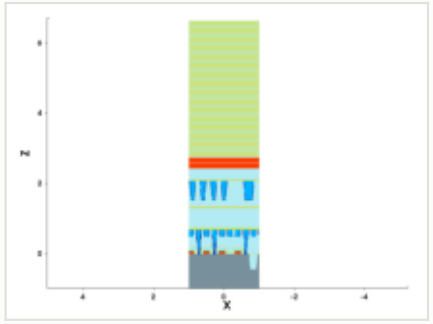


mask for this step

no mask for this step


steps by process area

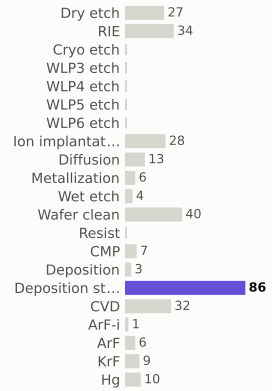

materials deposited (g)

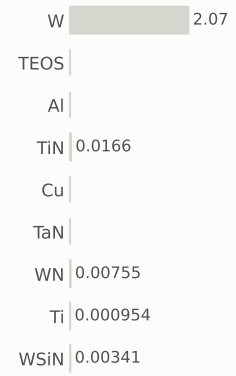

gases emitted (g)




Step #4040: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	294.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

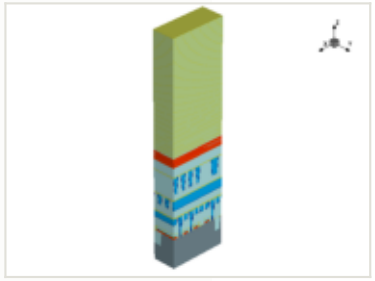


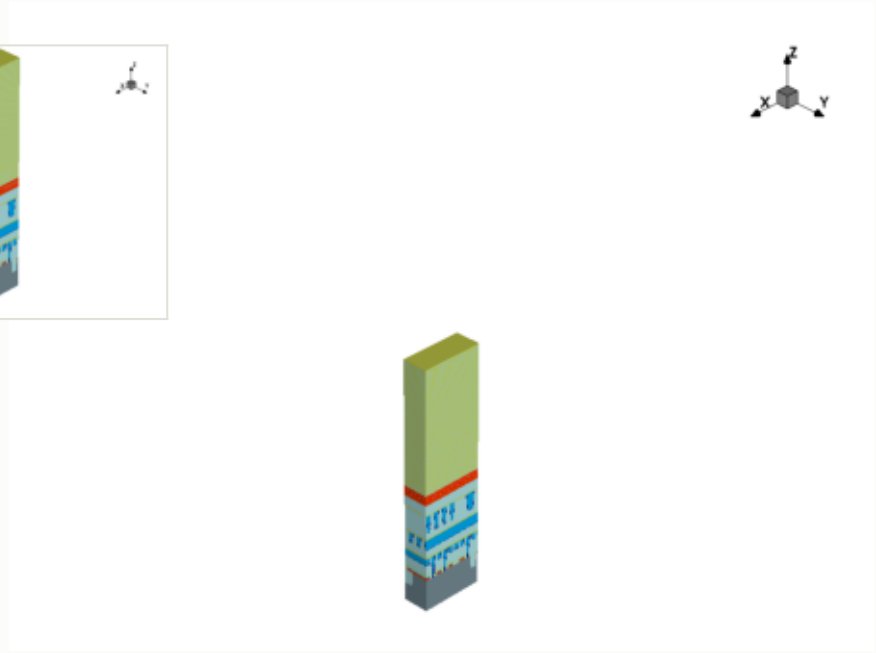

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

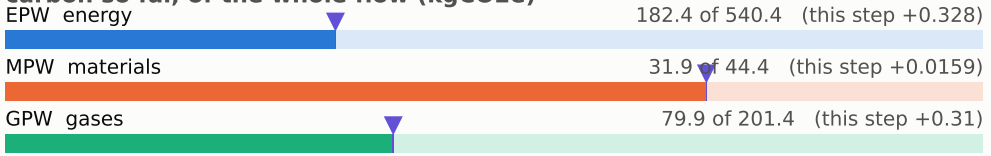


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

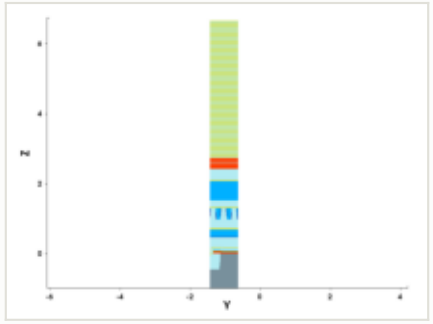


y cut at -1.035 µm

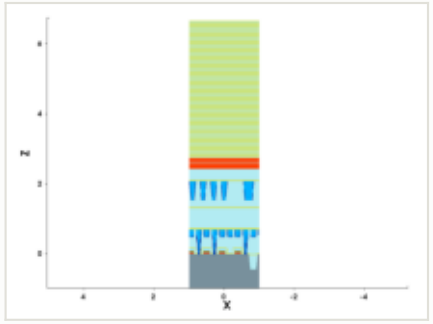

mask for this step

no mask for this step


steps by process area

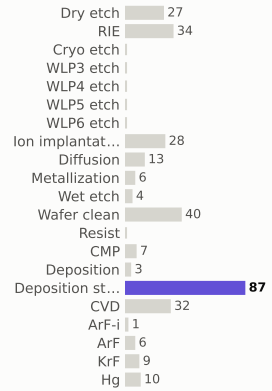

materials deposited (g)



gases emitted (g)

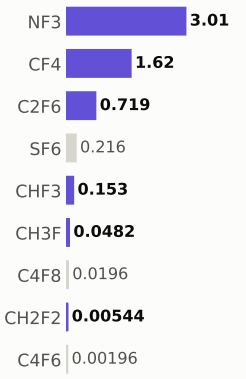


Step #4050: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	294.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

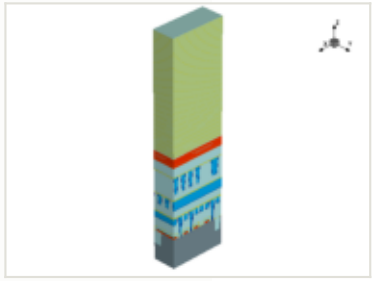




x cut at 0.000 µm

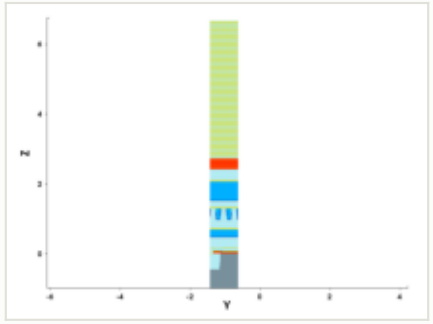

y cut at -1.035 µm

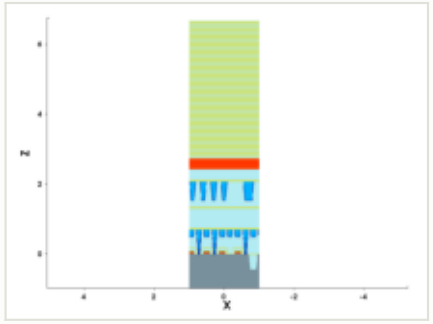


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

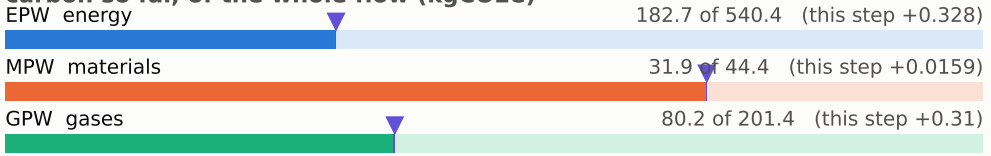

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

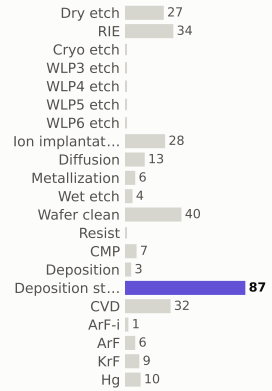

materials deposited (g)



gases emitted (g)

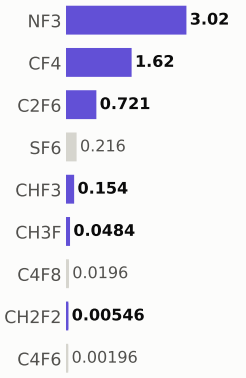


Step #4060: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	295.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

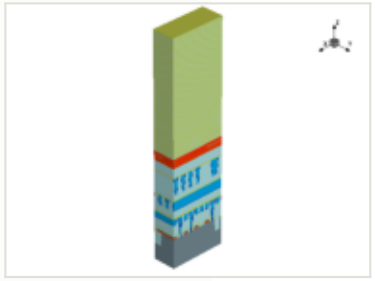


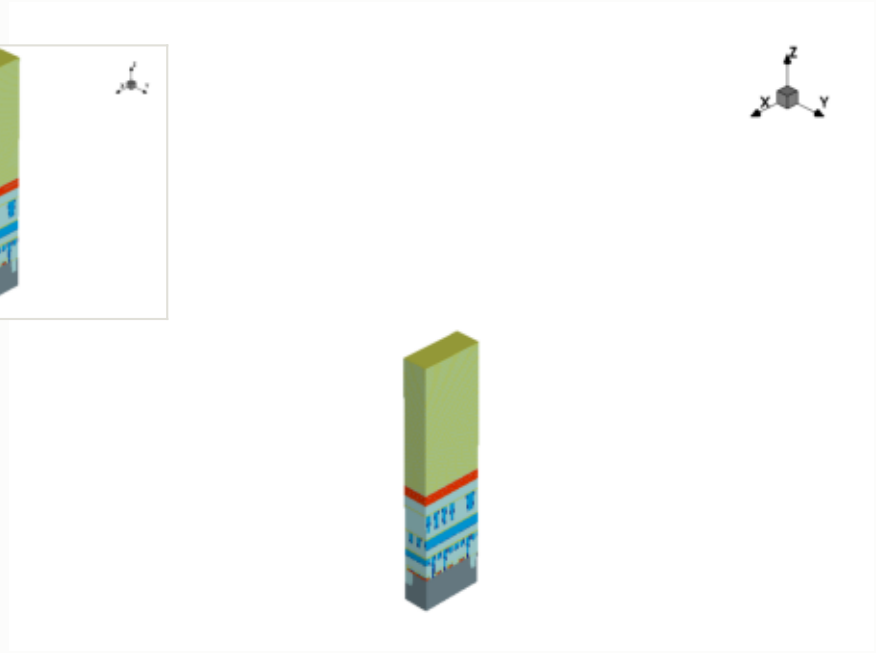

x cut at 0.000 µm

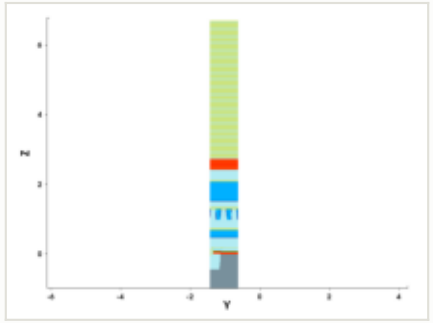

y cut at -1.035 µm

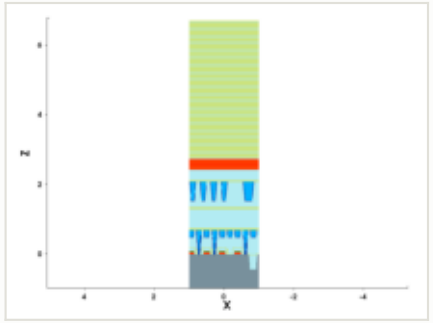


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

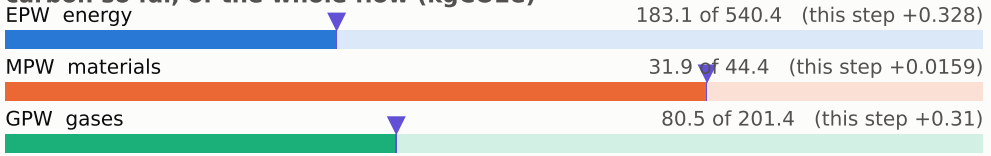


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

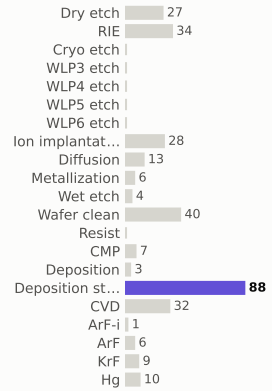

materials deposited (g)

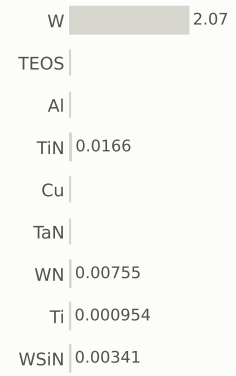

gases emitted (g)

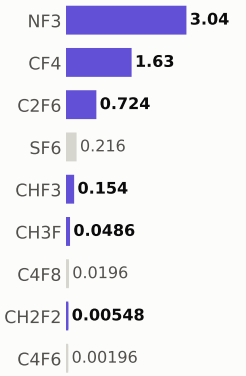


Step #4070: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	296.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

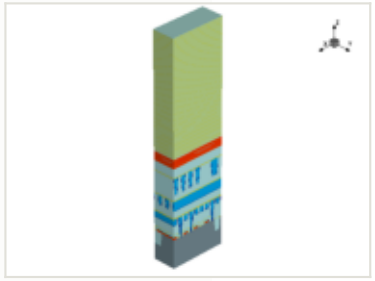


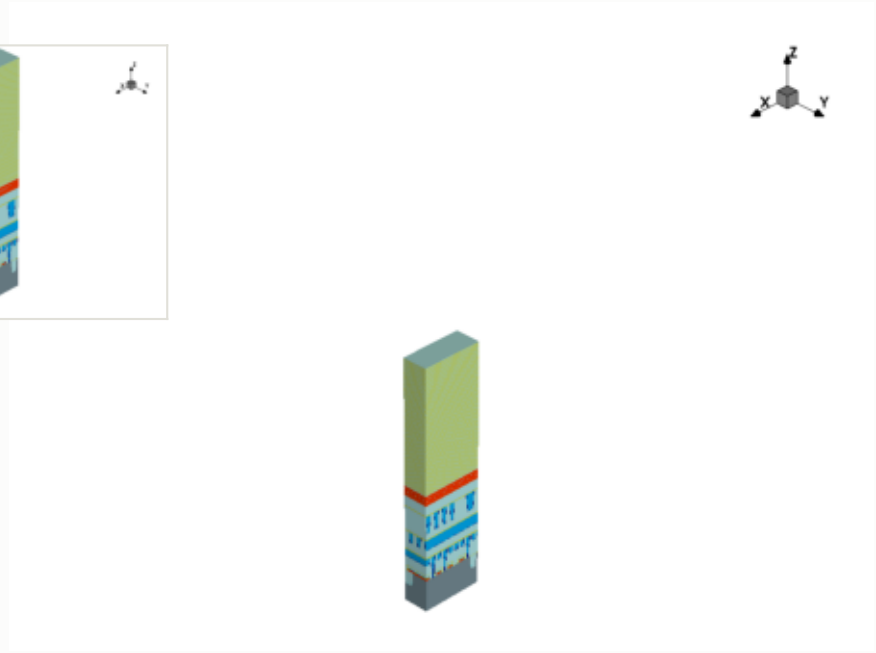

x cut at 0.000 µm

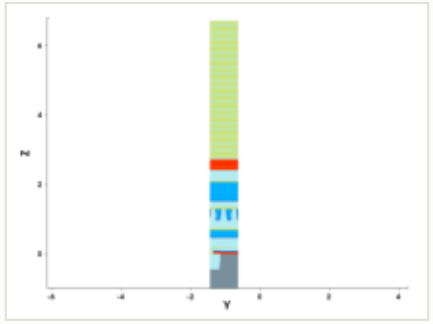

y cut at -1.035 µm

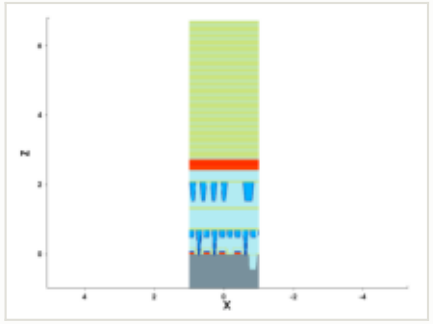


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

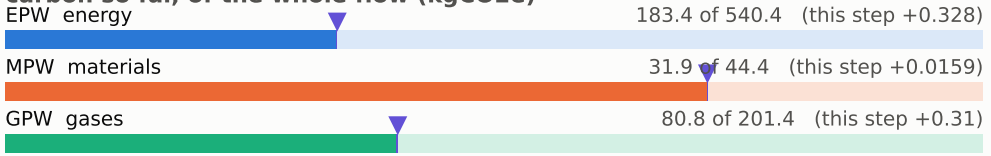

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

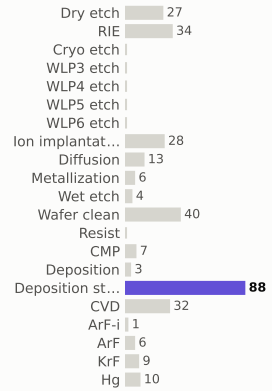

materials deposited (g)



gases emitted (g)

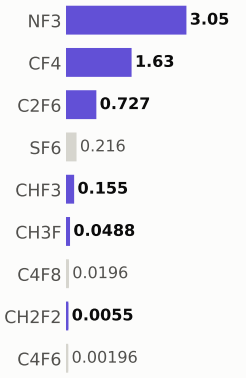


Step #4080: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	296.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

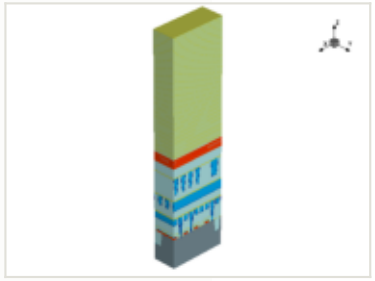


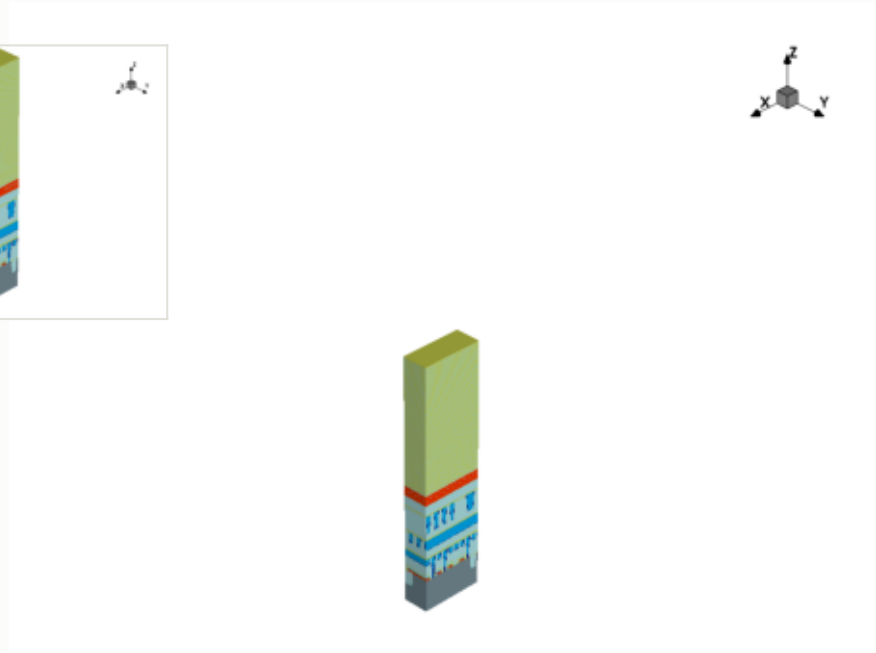

x cut at 0.000 µm

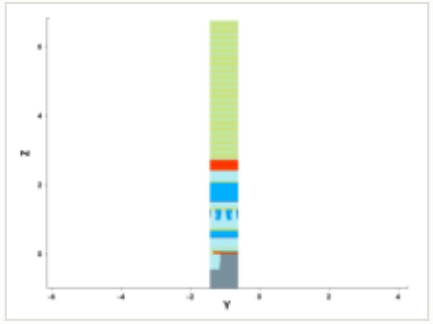

y cut at -1.035 µm

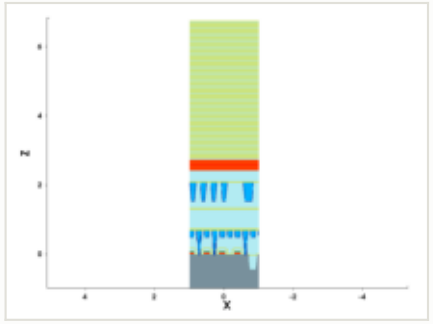


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

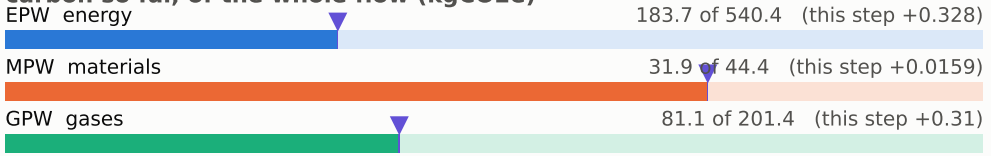

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

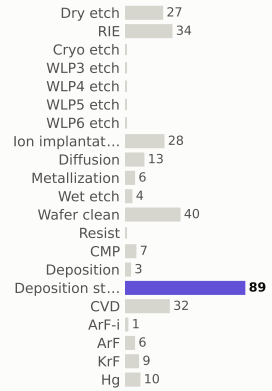

materials deposited (g)



gases emitted (g)

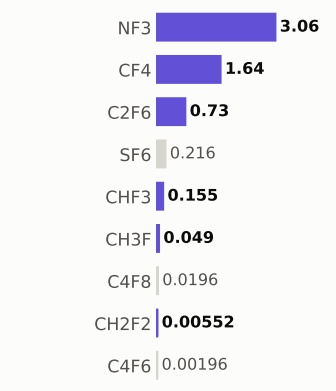


Step #4090: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	297.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

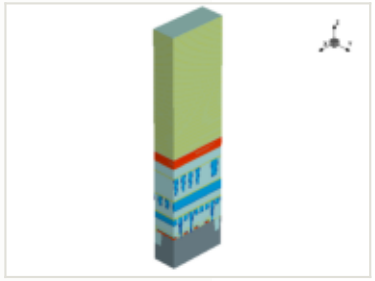




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

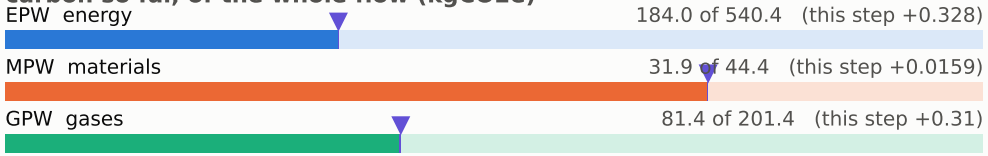


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

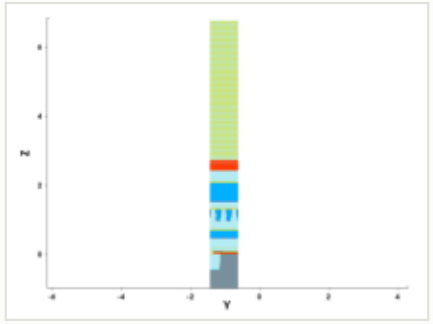


y cut at -1.035 µm

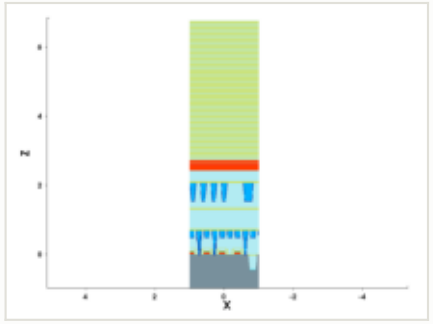


mask for this step

no mask for this step


steps by process area

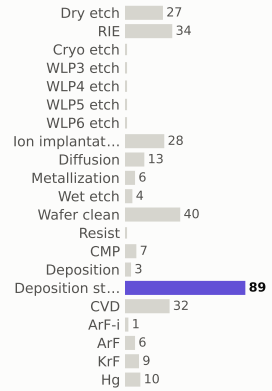

materials deposited (g)

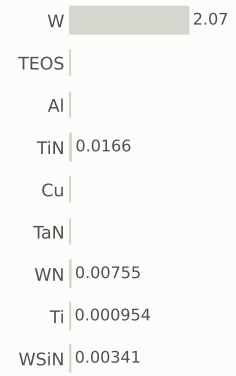

gases emitted (g)




Step #4100: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	298.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

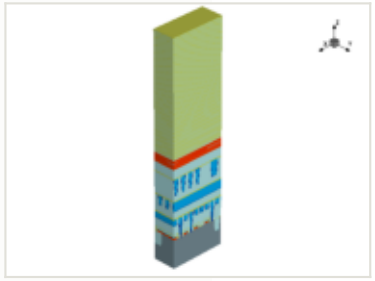


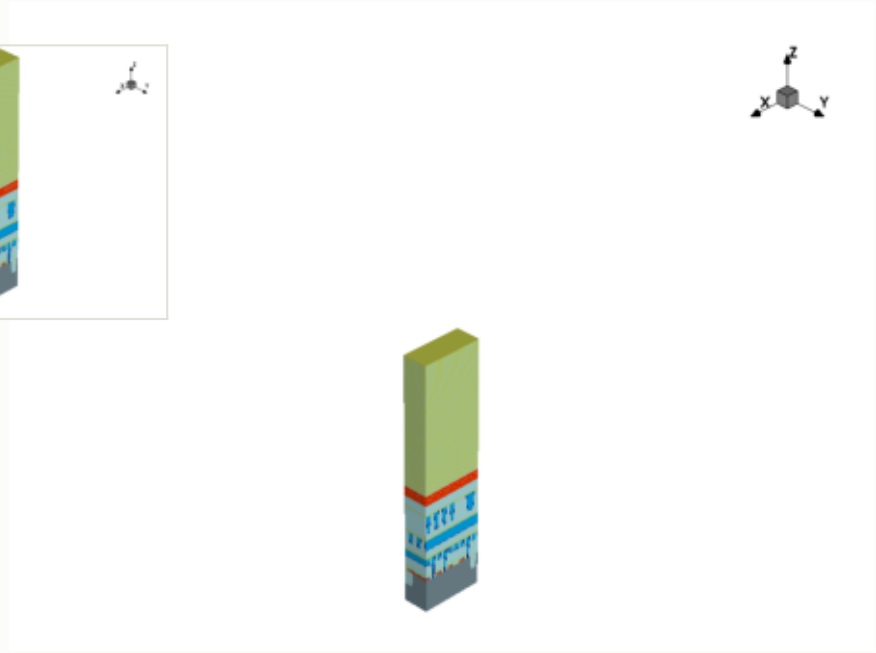

x cut at 0.000 µm

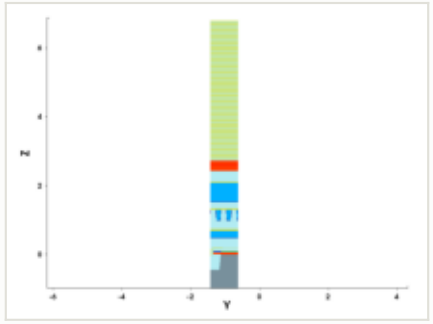

y cut at -1.035 µm

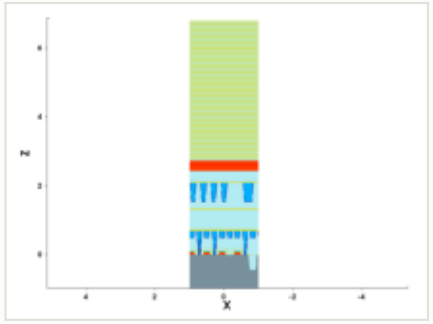


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

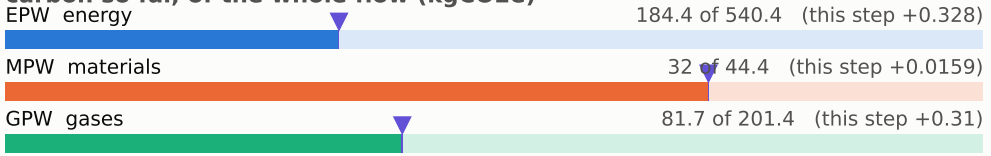

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

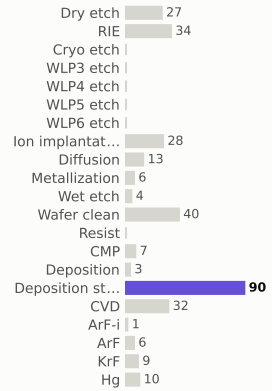

materials deposited (g)



gases emitted (g)

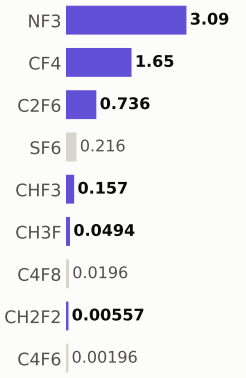


Step #4110: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	298.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

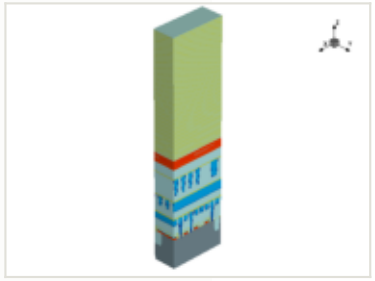




x cut at 0.000 µm

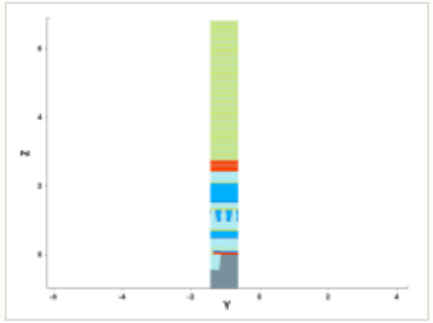

y cut at -1.035 µm

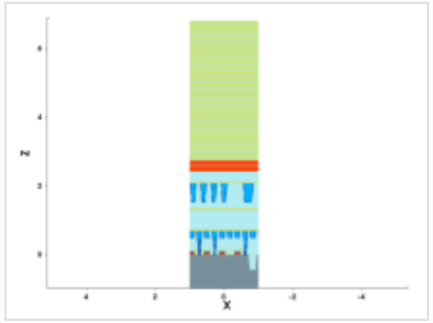


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

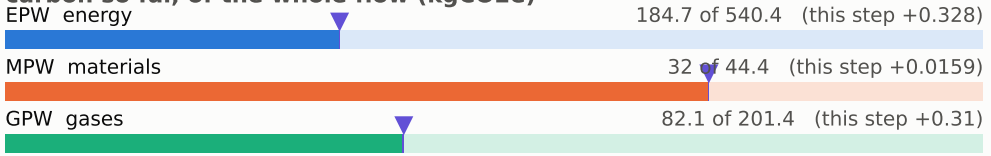

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

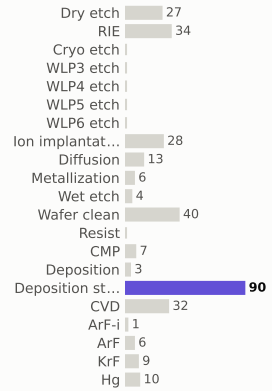

materials deposited (g)



gases emitted (g)

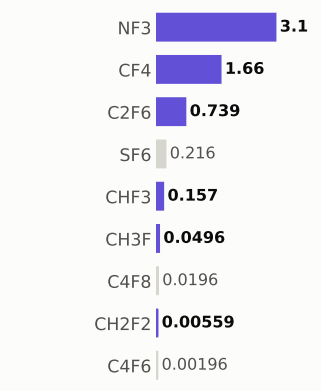


Step #4120: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	299.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

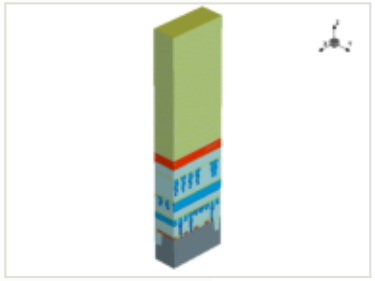


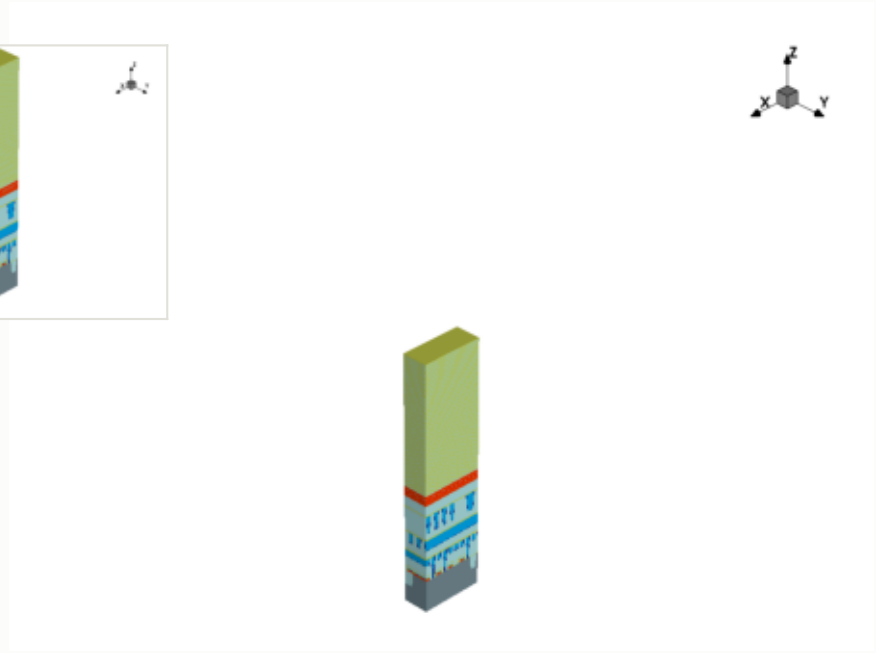

x cut at 0.000 µm

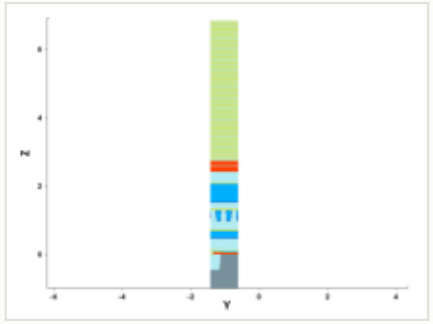

y cut at -1.035 µm

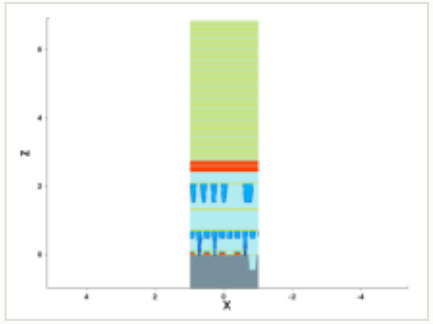


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

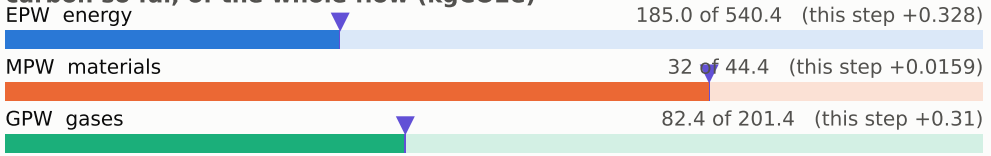

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

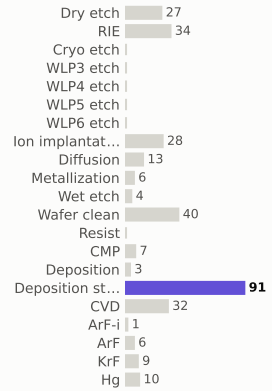

materials deposited (g)



gases emitted (g)

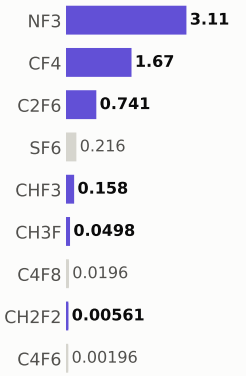


Step #4130: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	300.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

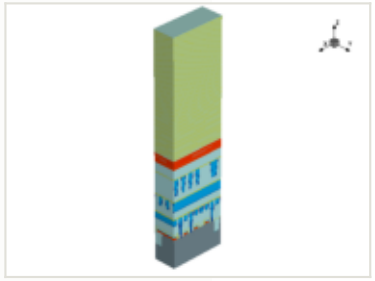




this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

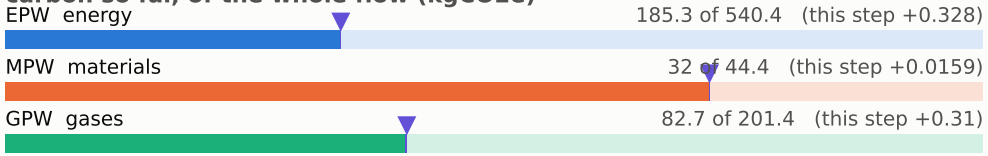


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

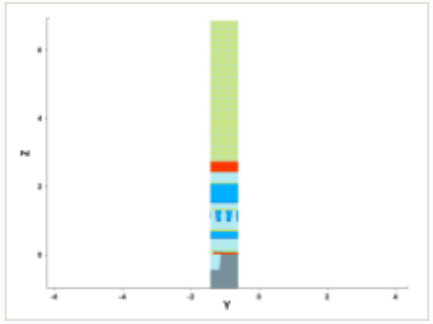


y cut at -1.035 µm

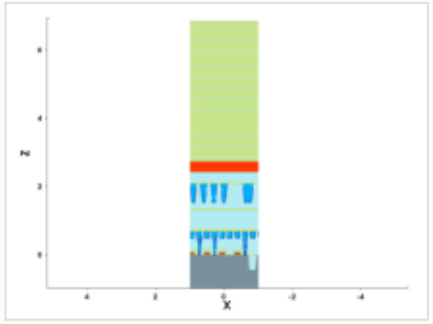

mask for this step

no mask for this step


steps by process area

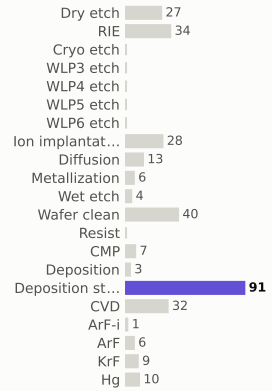

materials deposited (g)



gases emitted (g)

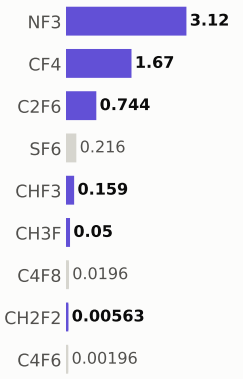


Step #4140: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	300.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

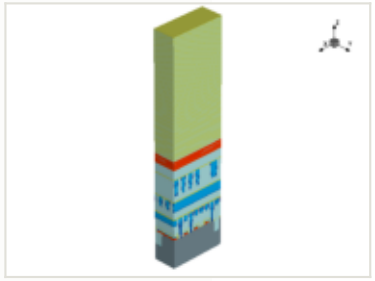


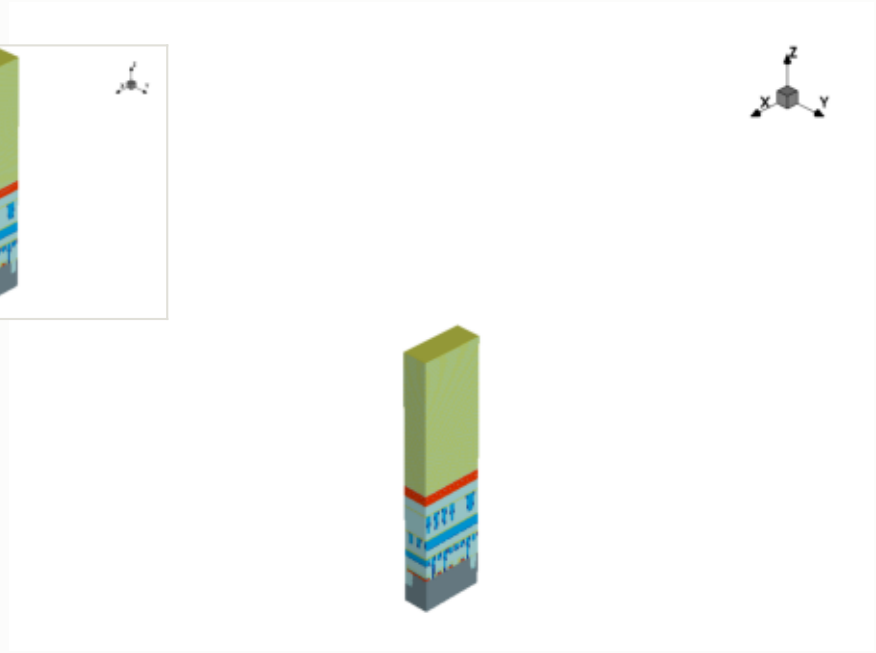

x cut at 0.000 µm

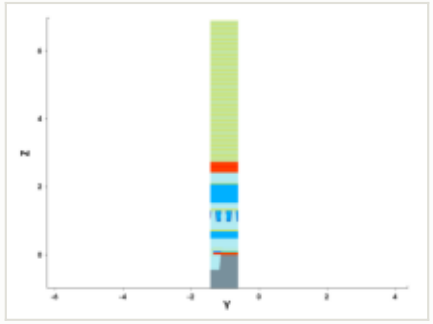

y cut at -1.035 µm

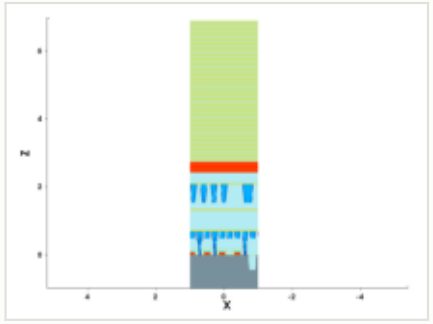


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

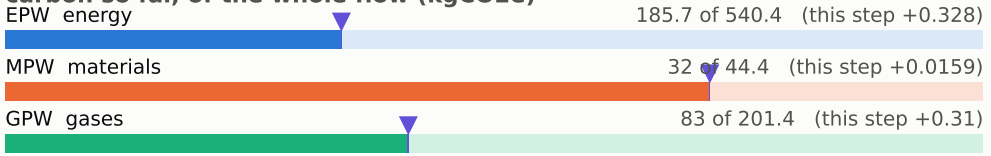

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

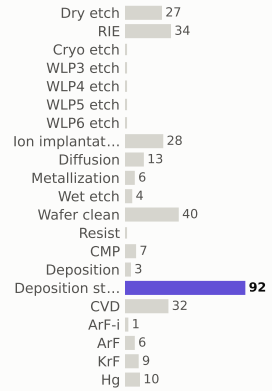

materials deposited (g)



gases emitted (g)




Step #4150: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	301.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

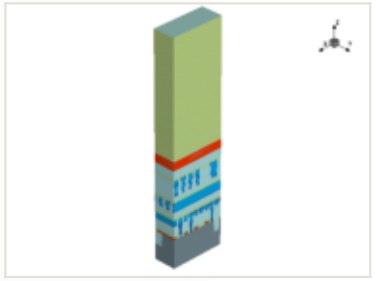


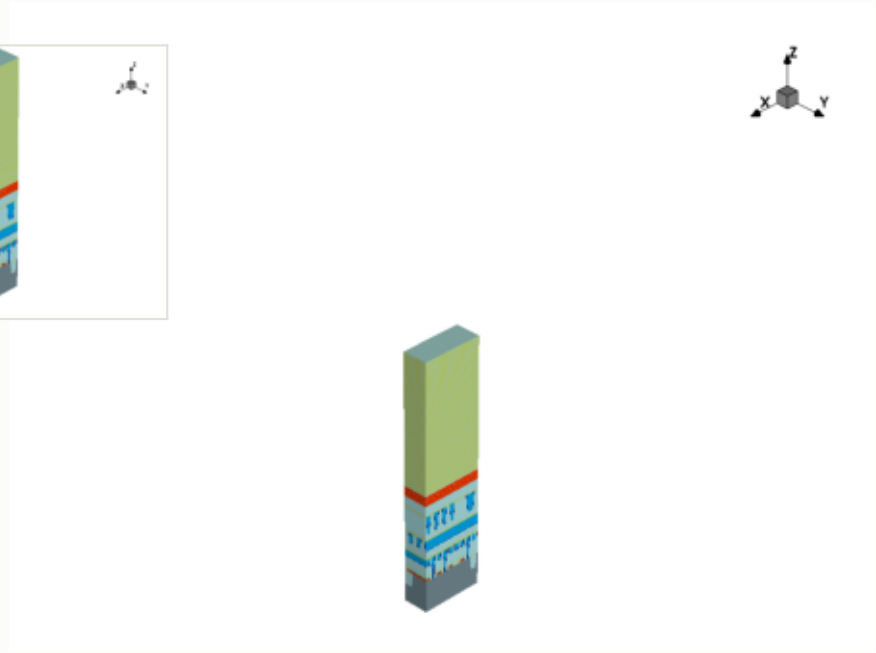

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

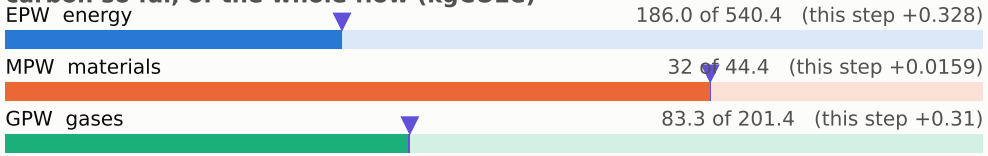


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

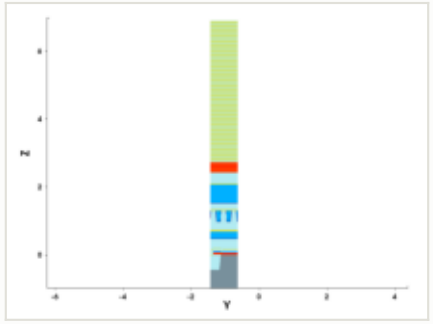


y cut at -1.035 µm

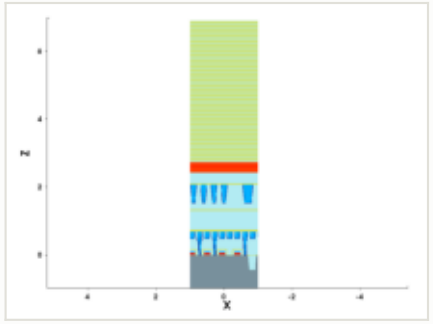

mask for this step

no mask for this step


steps by process area

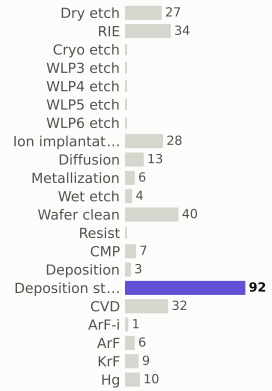

materials deposited (g)



gases emitted (g)




Step #4160: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	302.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

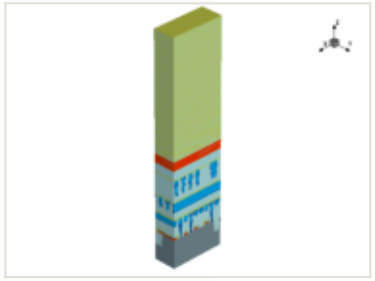


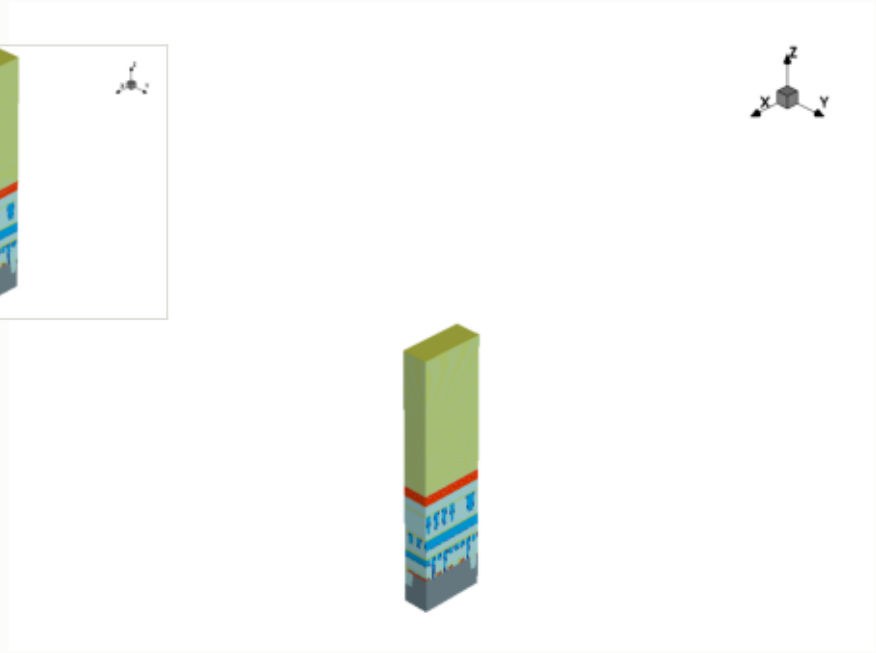

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

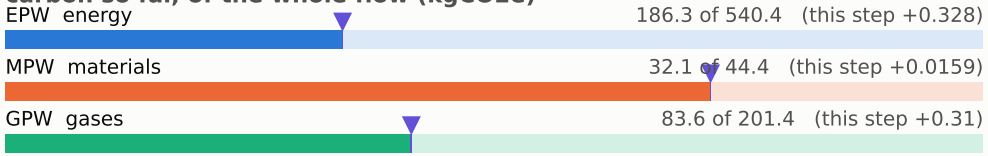


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

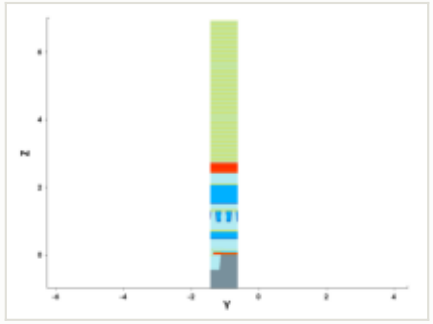


y cut at -1.035 µm

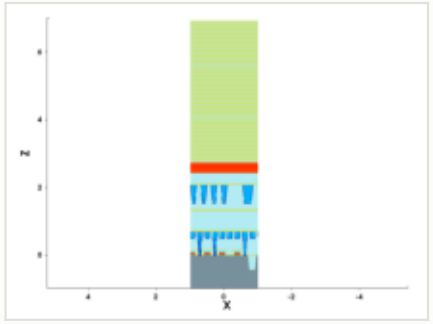


mask for this step

no mask for this step


steps by process area

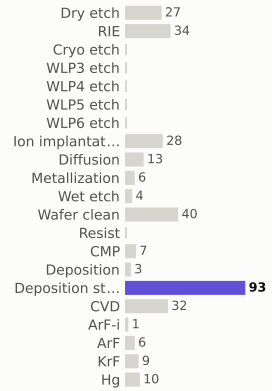

materials deposited (g)

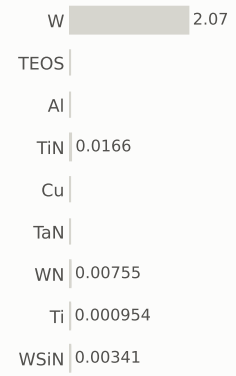

gases emitted (g)




Step #4170: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	302.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

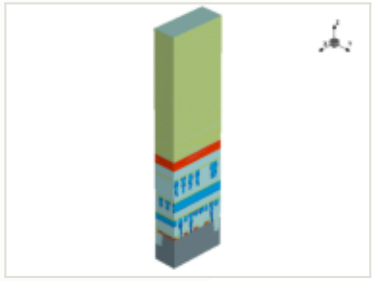





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

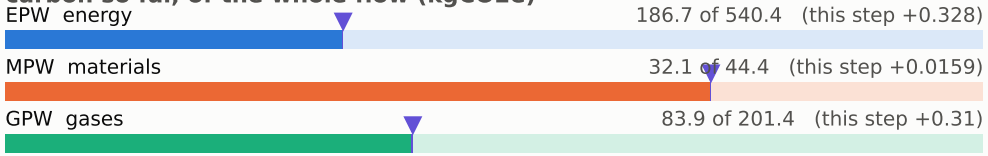


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

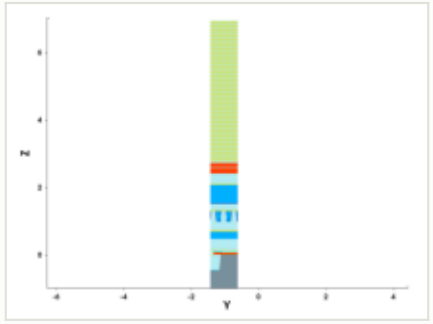


y cut at -1.035 µm

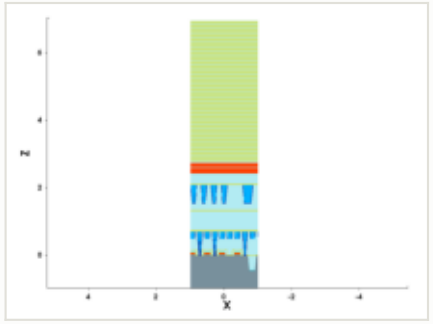


mask for this step

no mask for this step


steps by process area

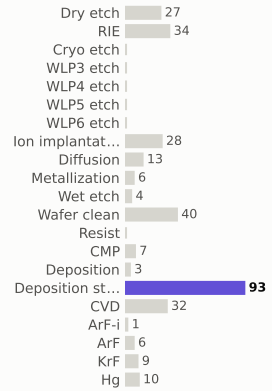

materials deposited (g)

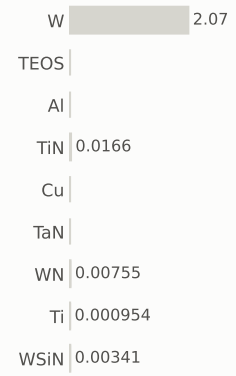

gases emitted (g)




Step #4180: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	303.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

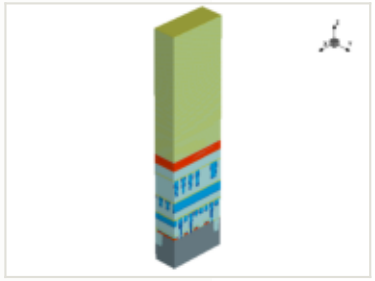


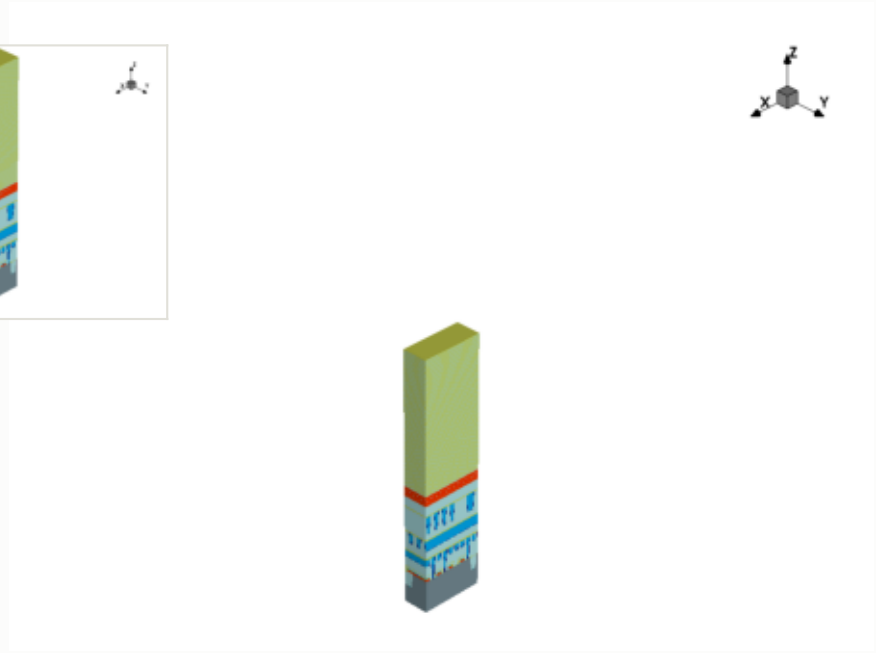


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

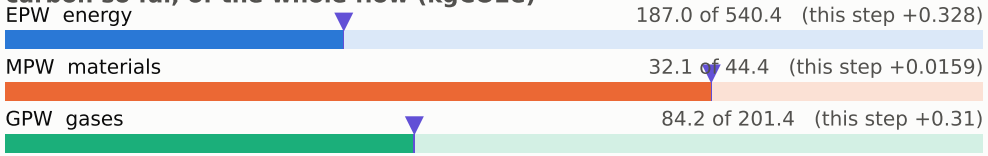


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

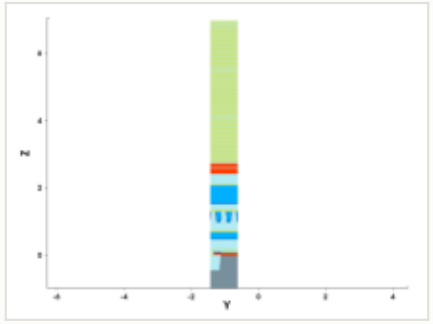


y cut at -1.035 µm

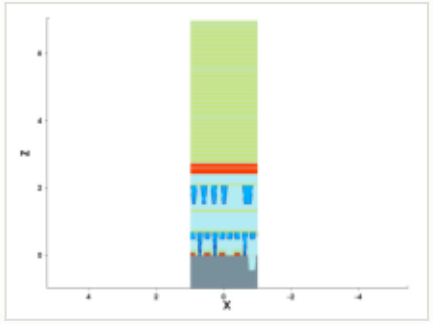

mask for this step

no mask for this step


steps by process area

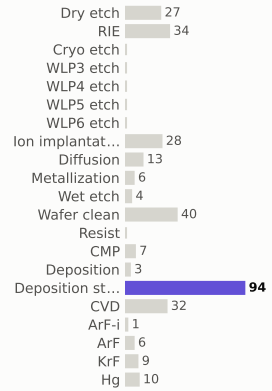

materials deposited (g)



gases emitted (g)

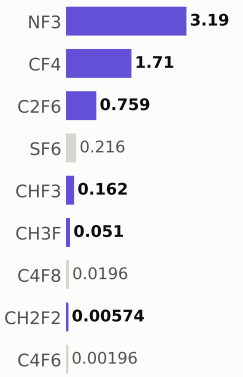


Step #4190: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	304.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

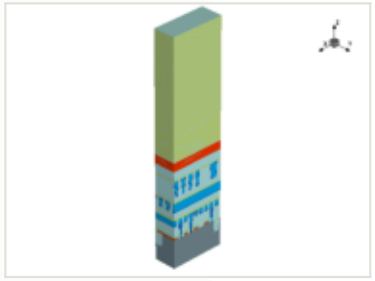





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

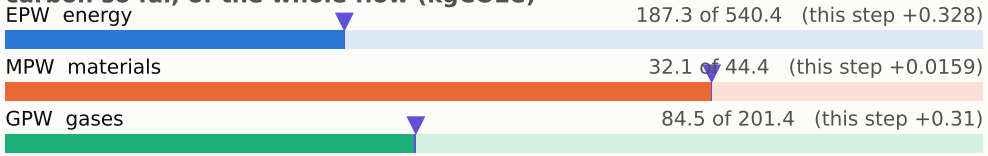


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

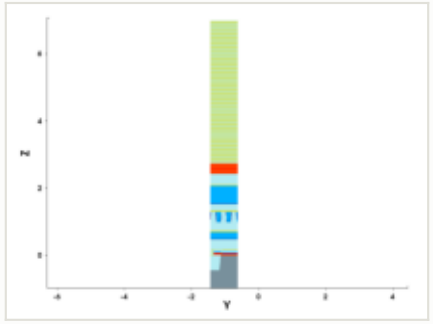


y cut at -1.035 µm

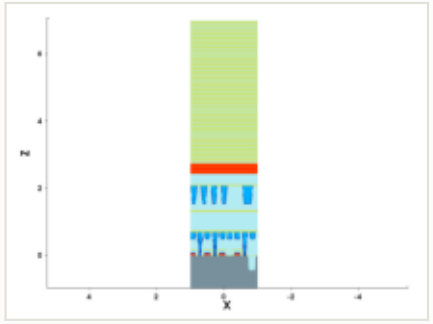

mask for this step

no mask for this step


steps by process area

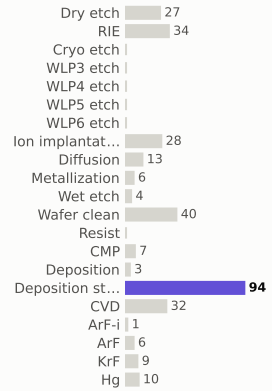

materials deposited (g)



gases emitted (g)




Step #4200: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	304.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

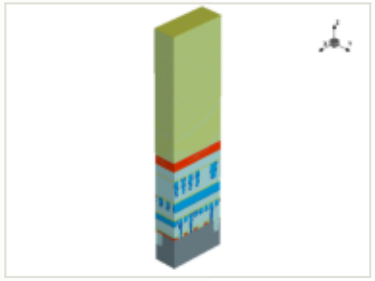

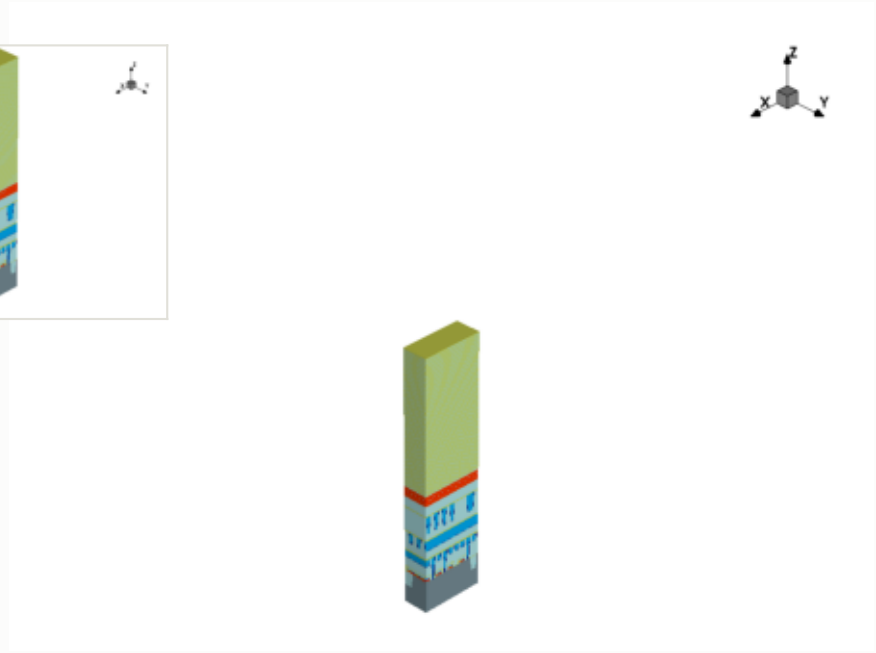

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 187.6 of 540.4 (this step +0.328)


MPW materials — 32.1 of 44.4 (this step +0.0159)

GPW gases — 84.8 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

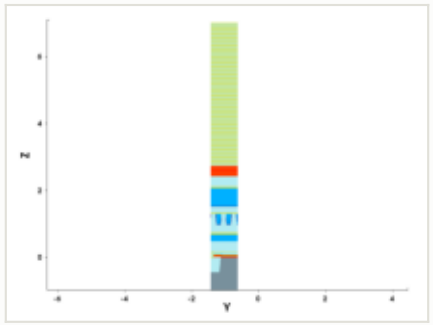


y cut at -1.035 µm

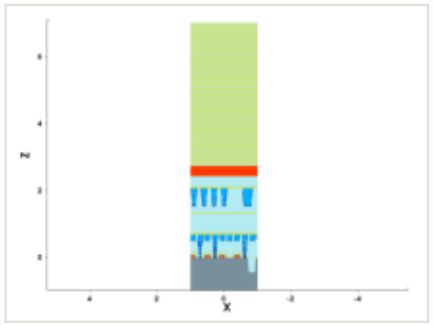


mask for this step

no mask for this step


steps by process area

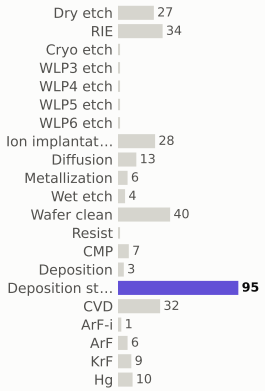

materials deposited (g)

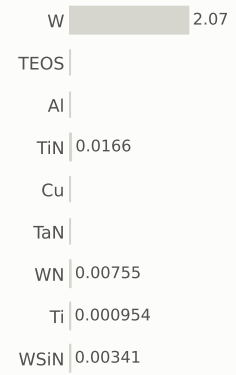

gases emitted (g)




Step #4210: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	305.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

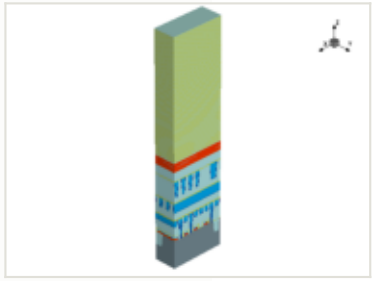


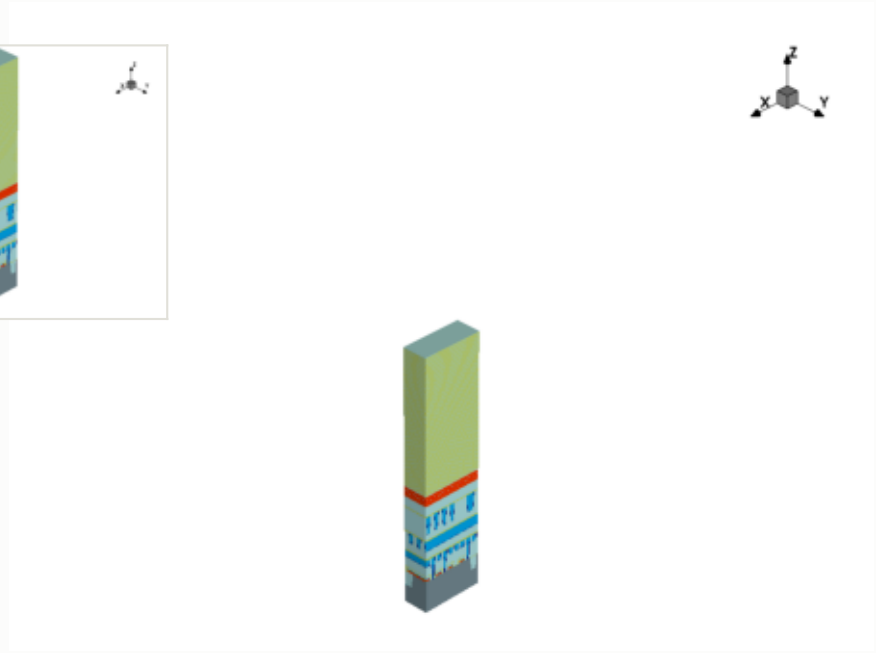


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

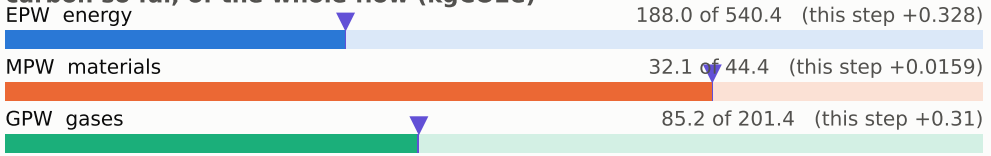


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

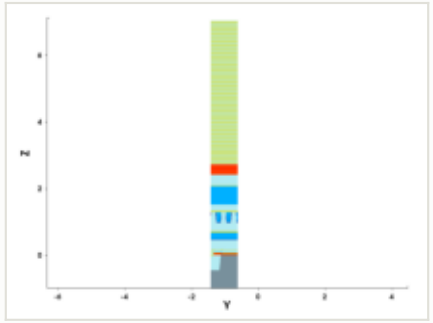


y cut at -1.035 µm

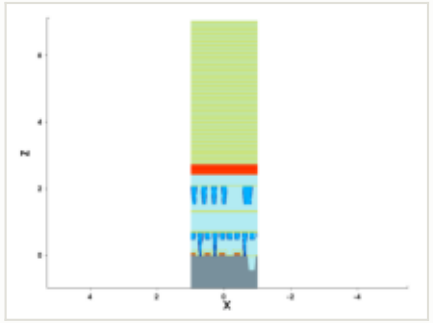

mask for this step

no mask for this step


steps by process area

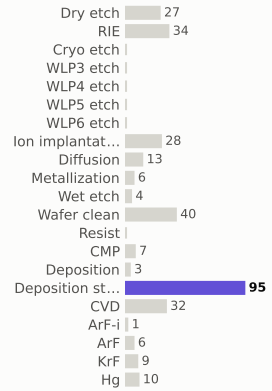

materials deposited (g)



gases emitted (g)

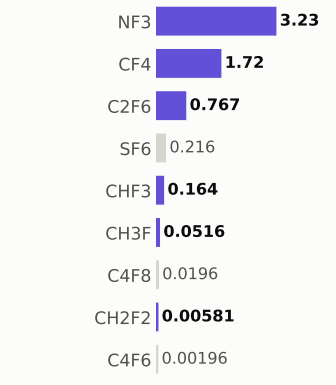


Step #4220: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	305.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

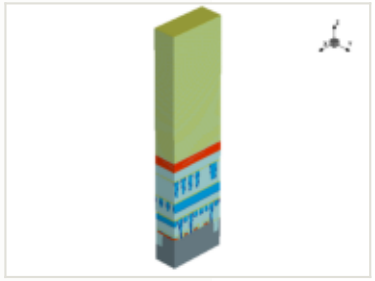


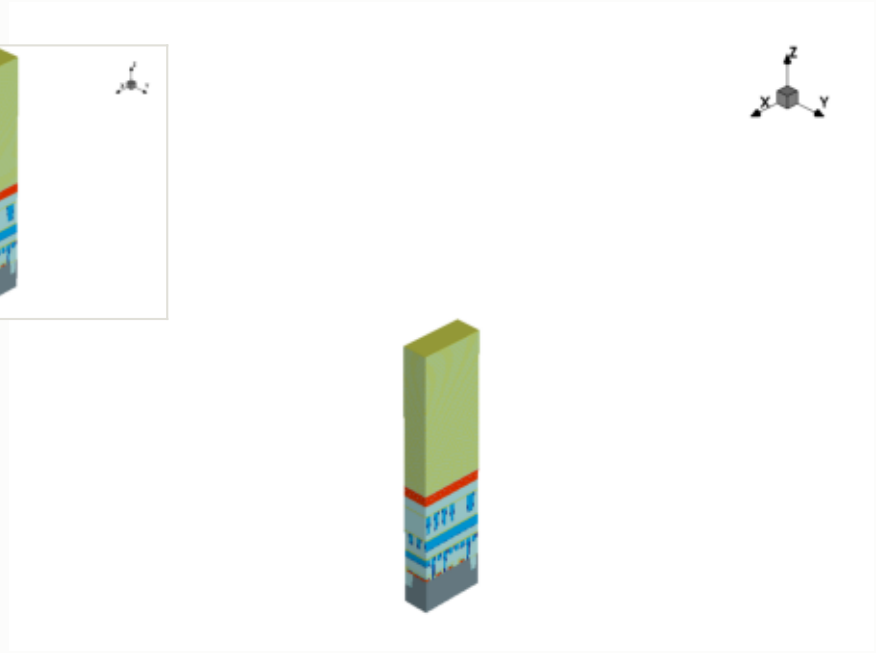


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

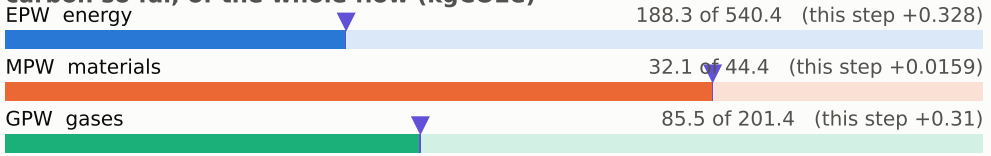


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

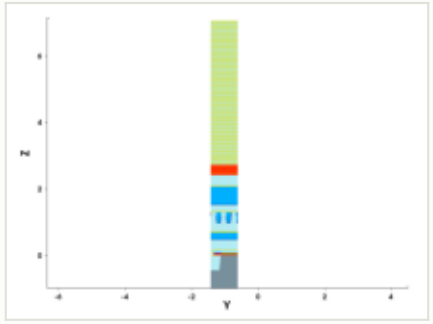


y cut at -1.035 µm

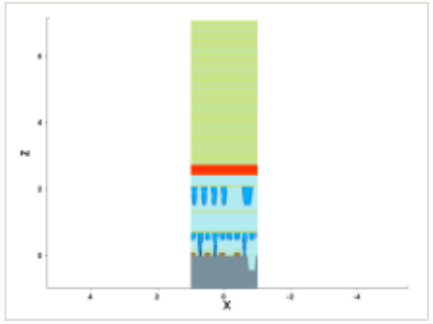


mask for this step

no mask for this step


steps by process area

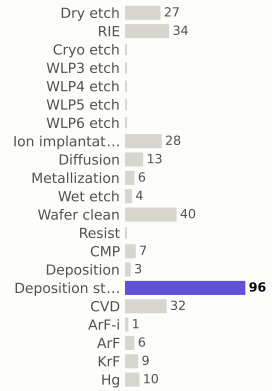

materials deposited (g)

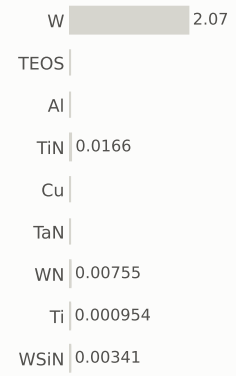

gases emitted (g)




Step #4230: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	306.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

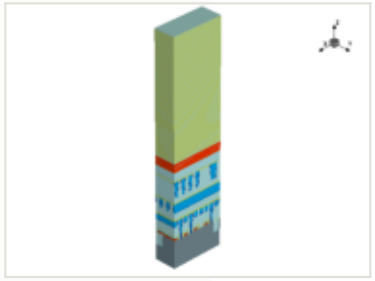


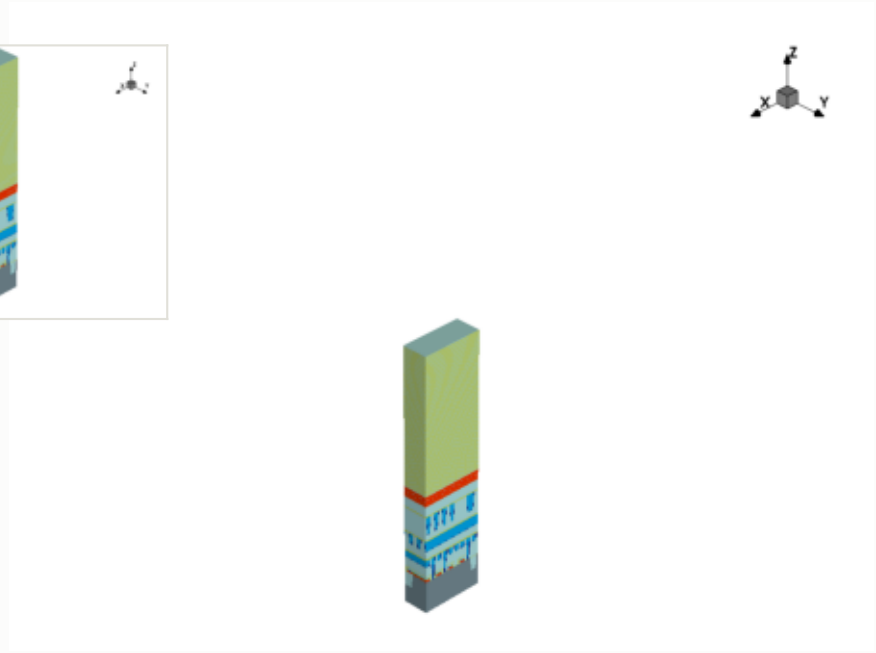

x cut at 0.000 µm

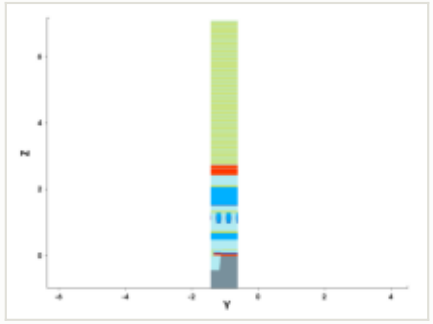

y cut at -1.035 µm

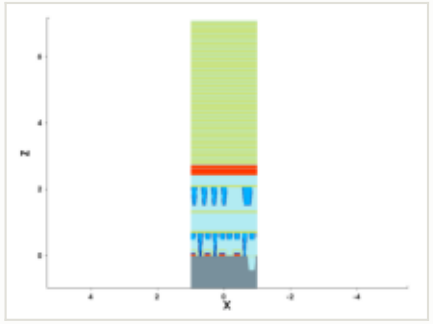


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

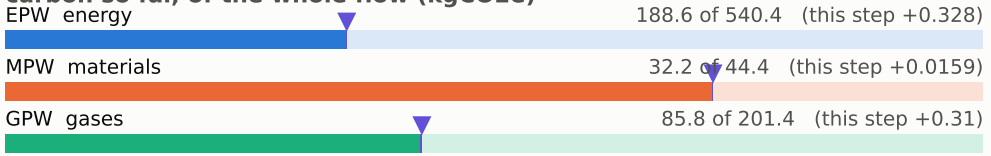

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

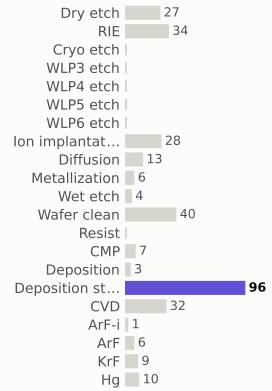

materials deposited (g)



gases emitted (g)

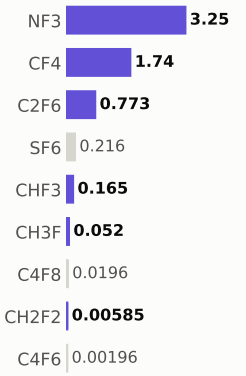


Step #4240: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	307.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

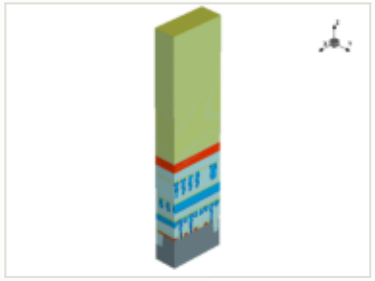


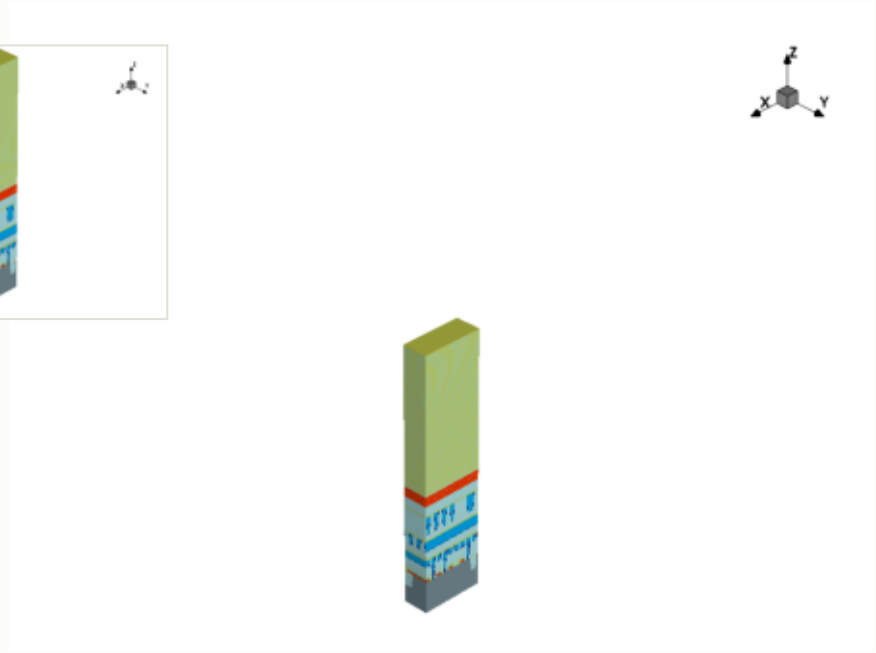

x cut at 0.000 µm

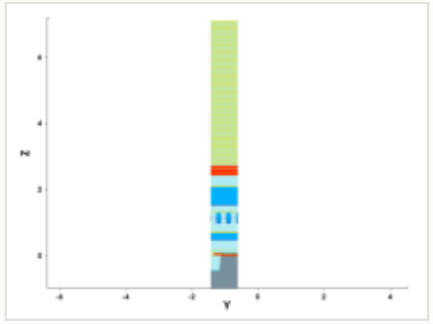

y cut at -1.035 µm

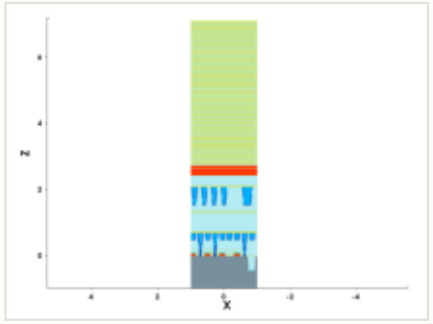


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

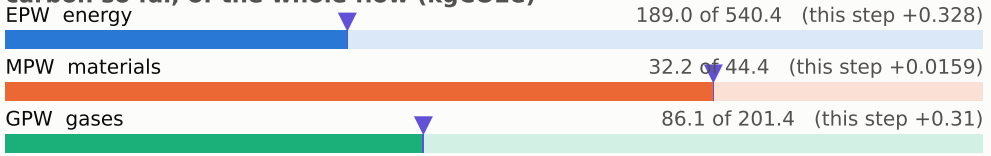

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

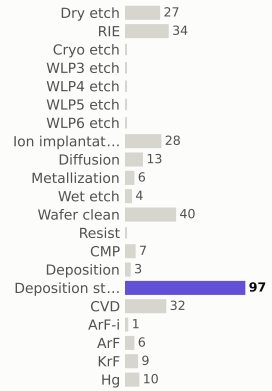

materials deposited (g)



gases emitted (g)

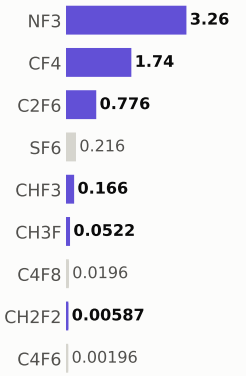


Step #4250: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	307.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

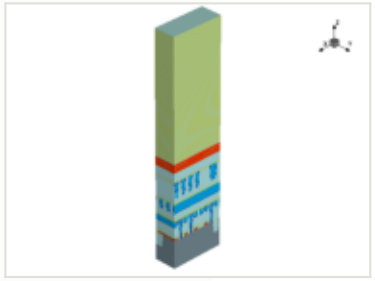

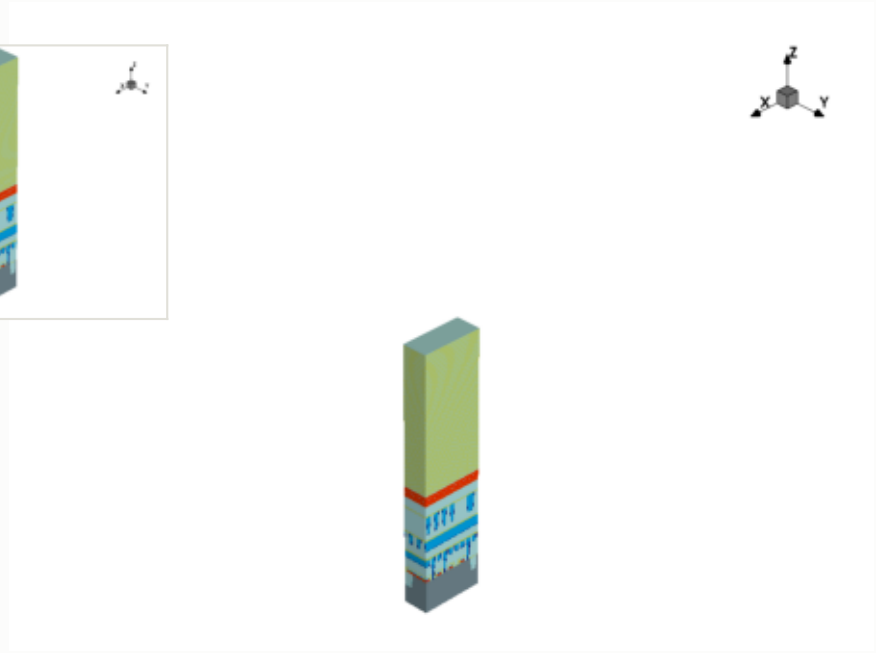

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 189.3 of 540.4 (this step +0.328)


MPW materials — 32.2 of 44.4 (this step +0.0159)

GPW gases — 86.4 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

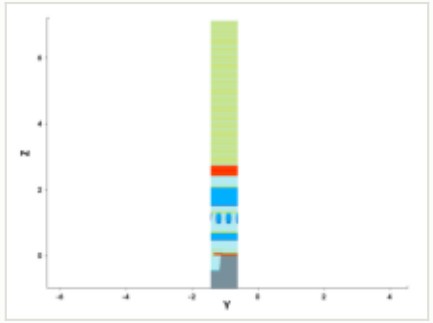


y cut at -1.035 µm

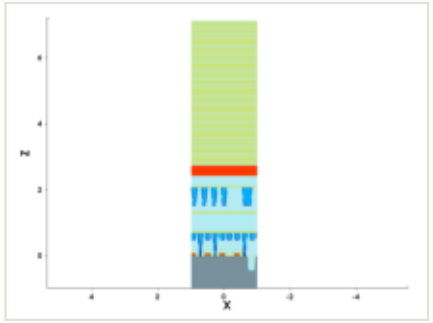


mask for this step

no mask for this step


steps by process area

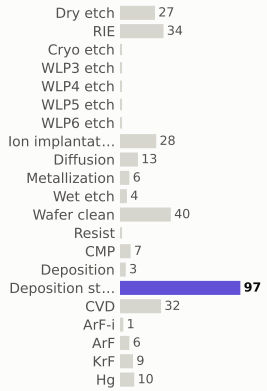

materials deposited (g)

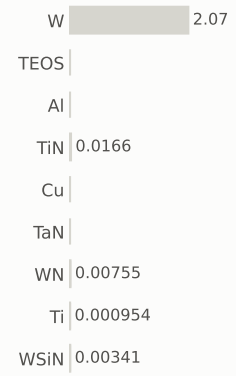

gases emitted (g)




Step #4260: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	308.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

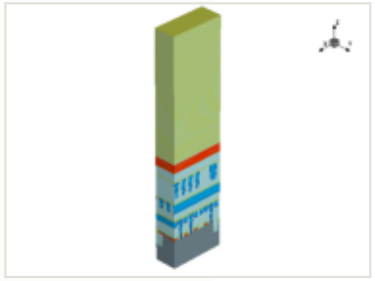


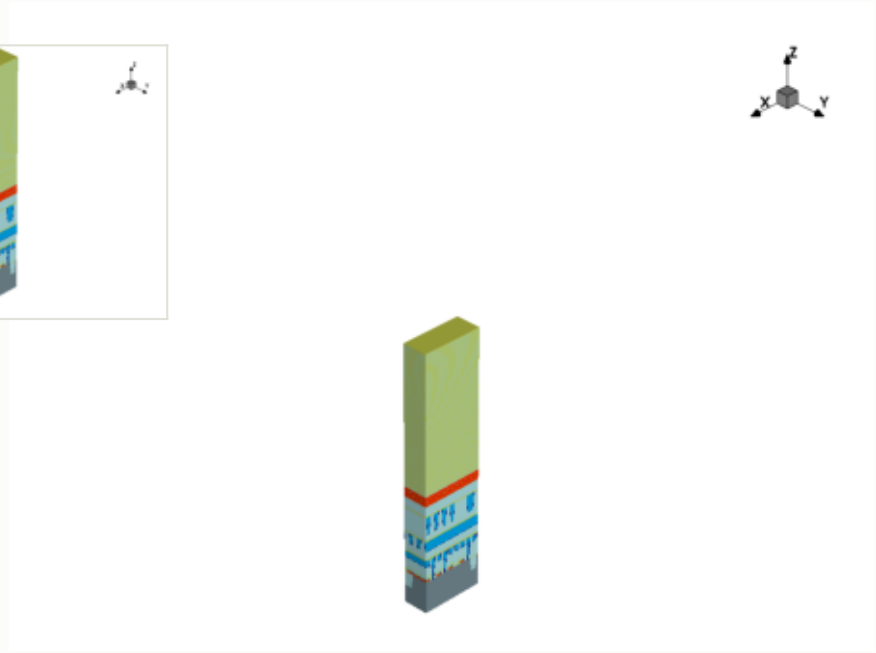


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

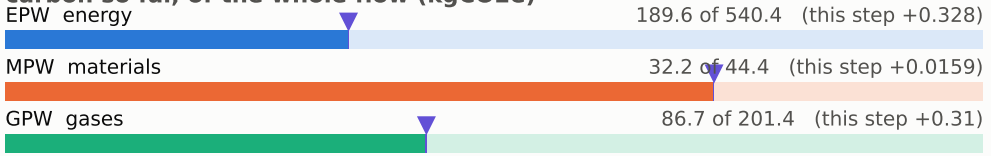


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

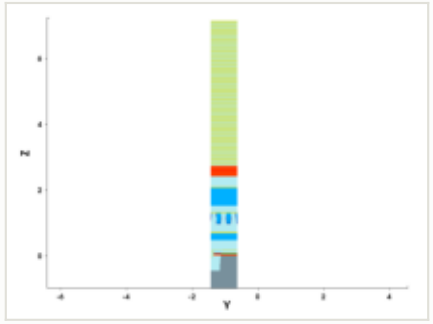


y cut at -1.035 µm

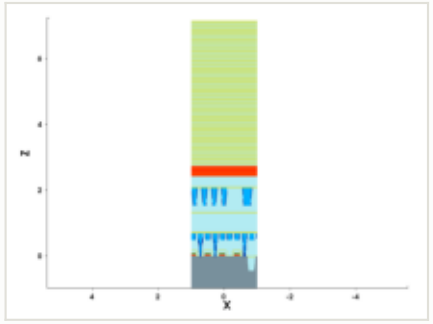


mask for this step

no mask for this step


steps by process area

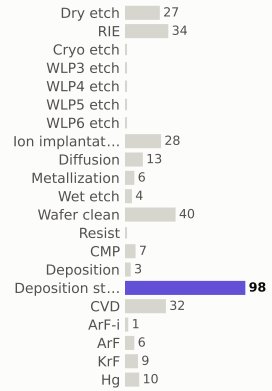

materials deposited (g)

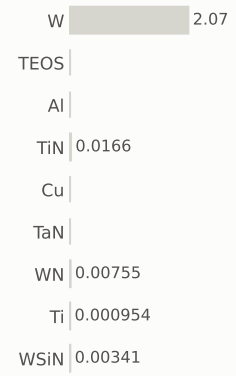

gases emitted (g)



Step #4270: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	309.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




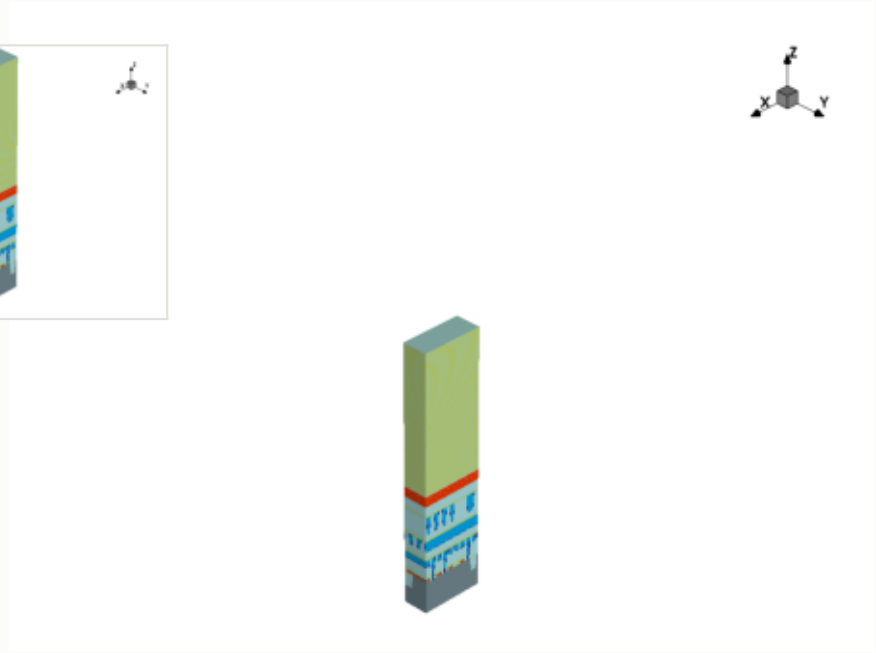


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

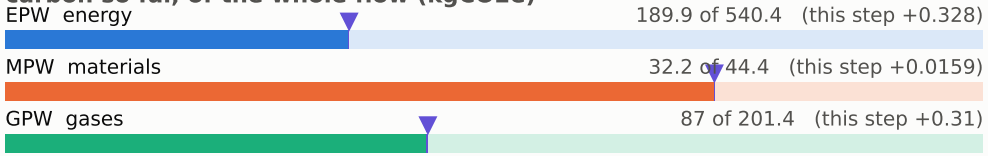


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

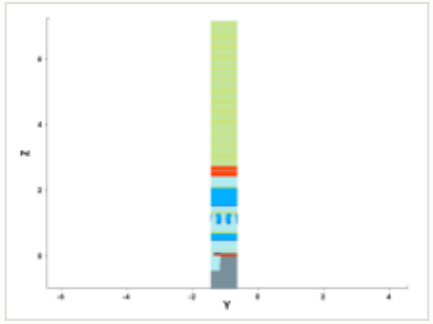


y cut at -1.035 µm

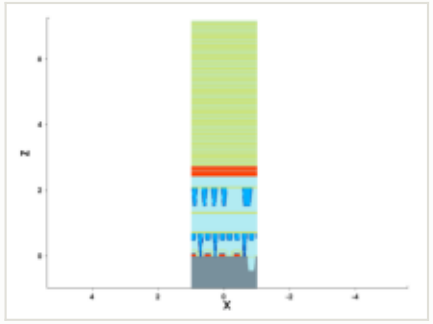


mask for this step

no mask for this step


steps by process area

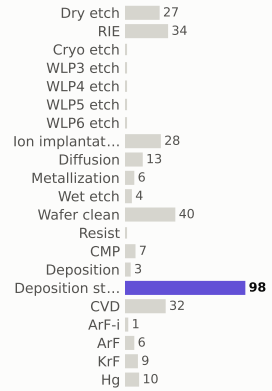

materials deposited (g)

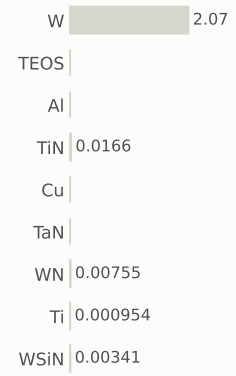

gases emitted (g)

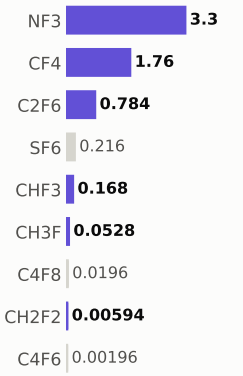


Step #4280: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	309.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

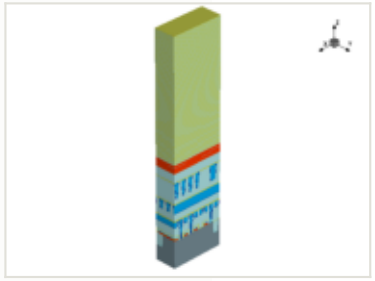


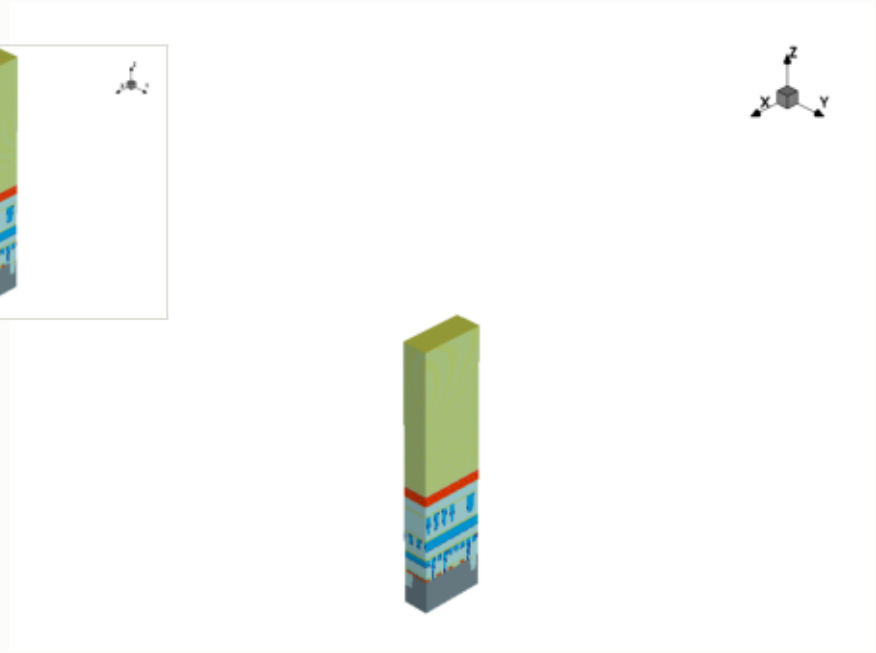


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

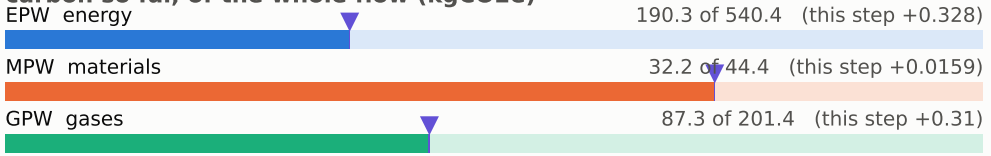


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

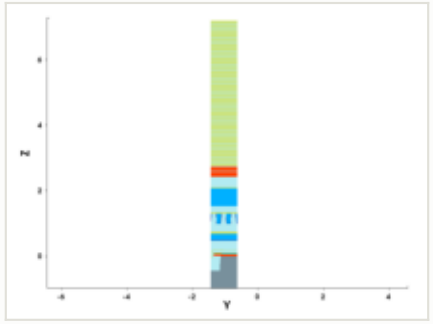


y cut at -1.035 µm

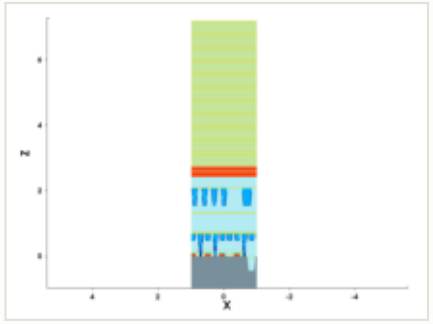


mask for this step

no mask for this step


steps by process area

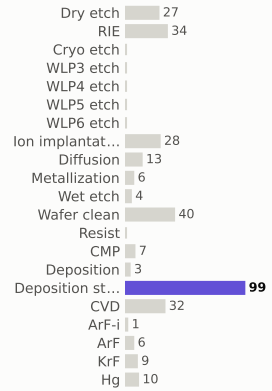

materials deposited (g)

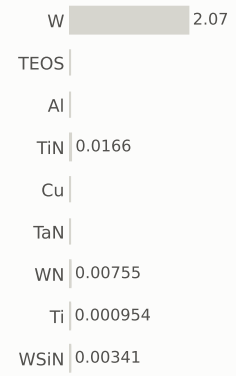

gases emitted (g)

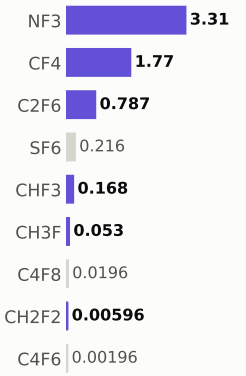


Step #4290: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	310.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

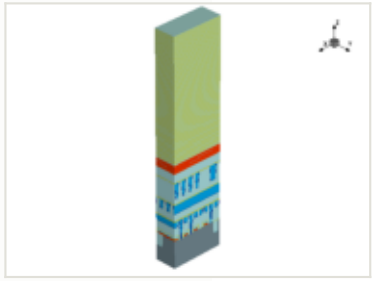


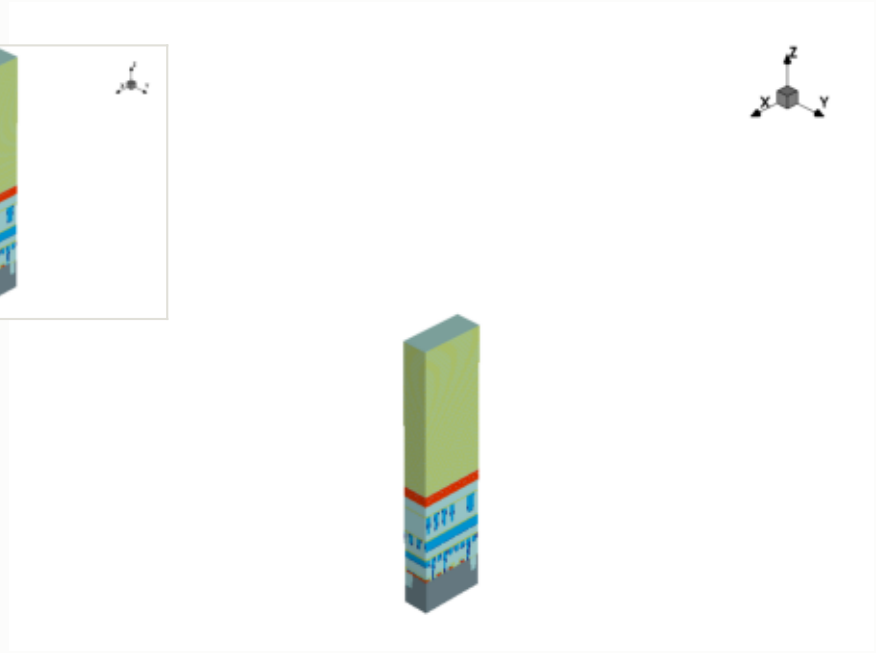


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

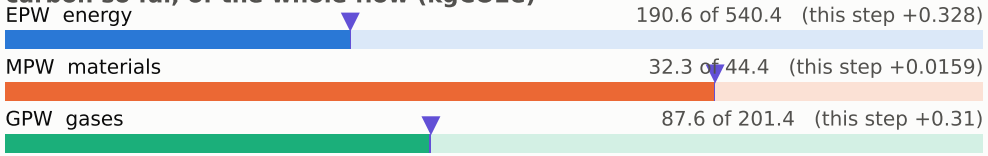


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

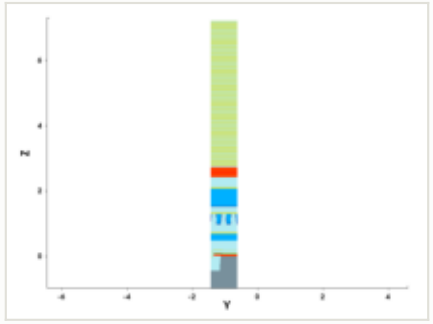


y cut at -1.035 µm

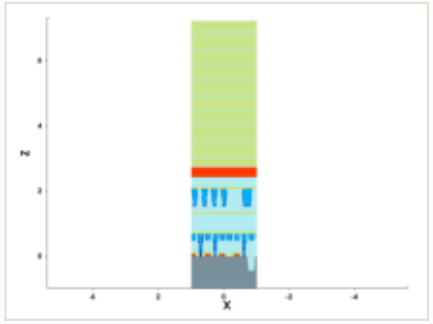


mask for this step

no mask for this step


steps by process area



materials deposited (g)

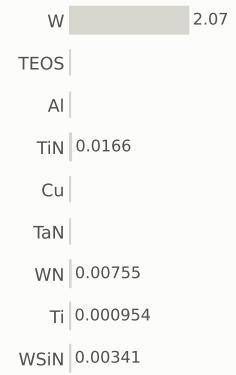

gases emitted (g)

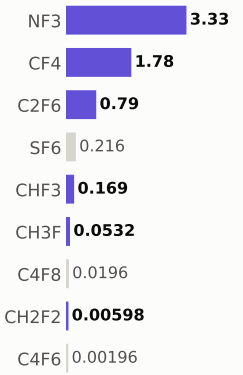


Step #4300: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	311.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

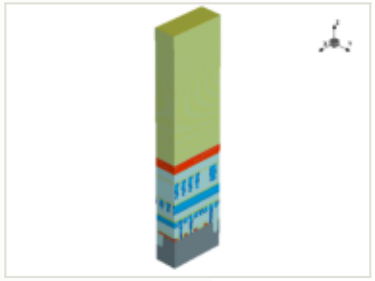


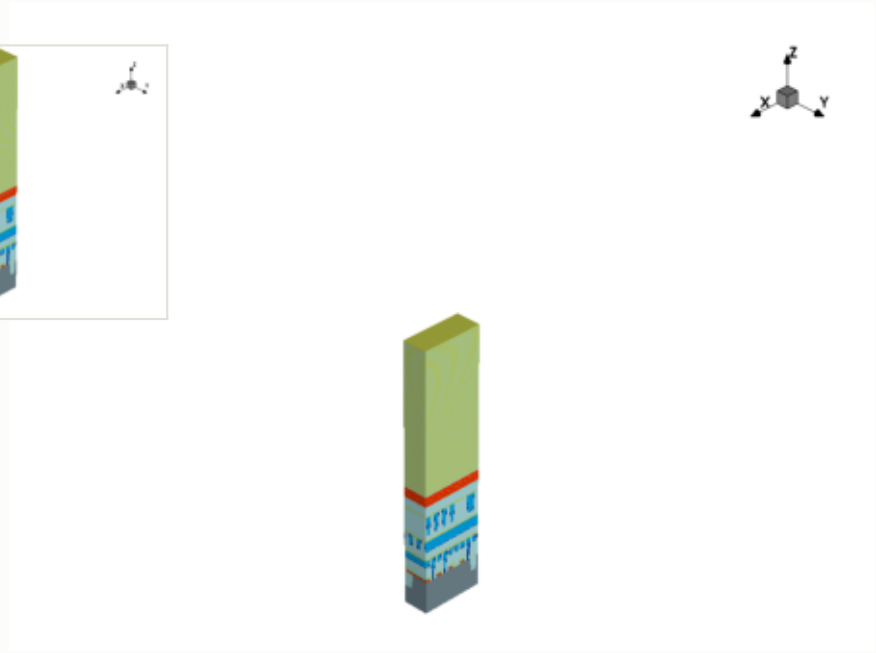


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

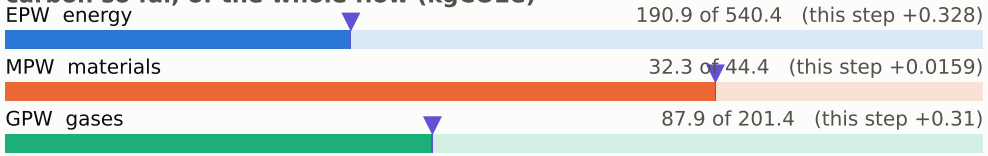


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

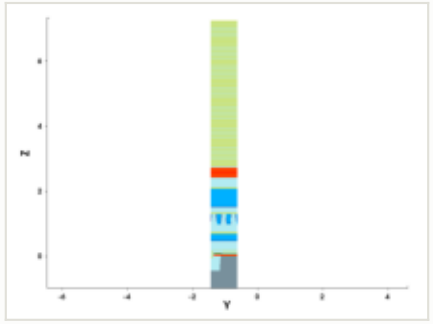


y cut at -1.035 µm

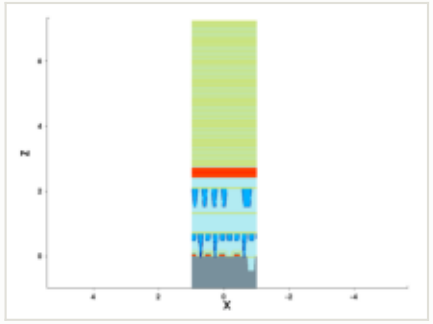


mask for this step

no mask for this step


steps by process area

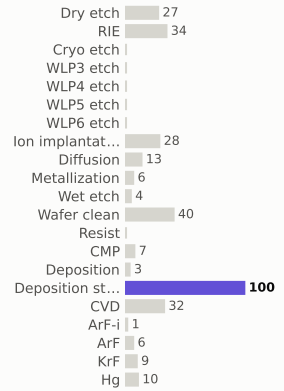

materials deposited (g)

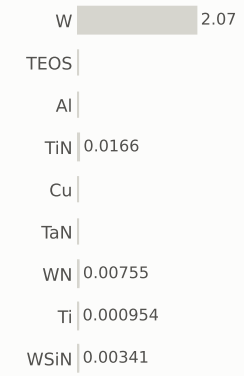

gases emitted (g)

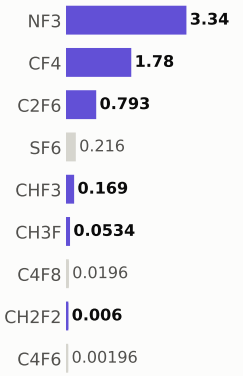

Step #4310: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	311.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




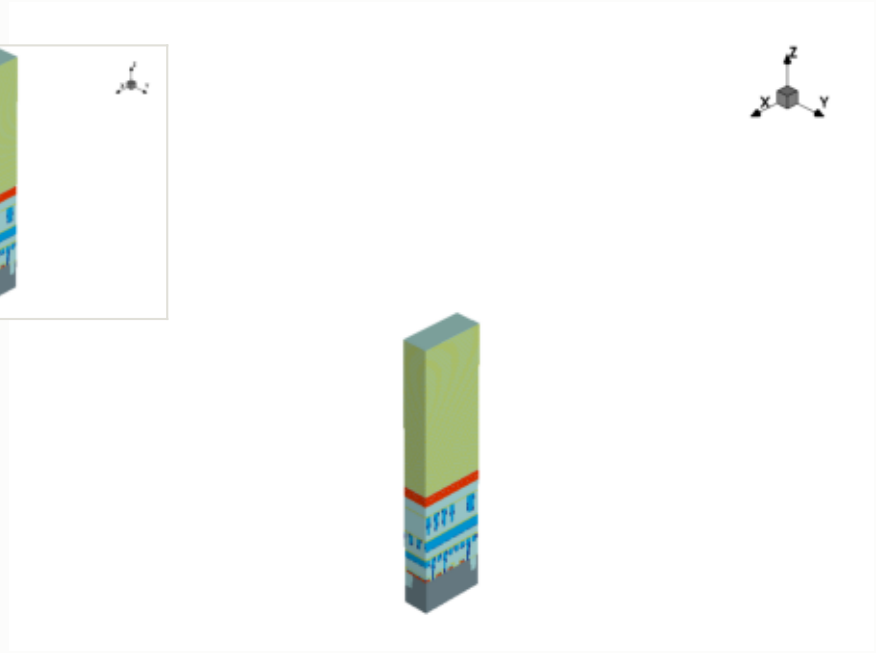


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

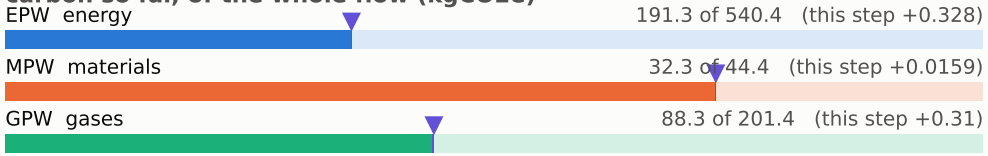


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

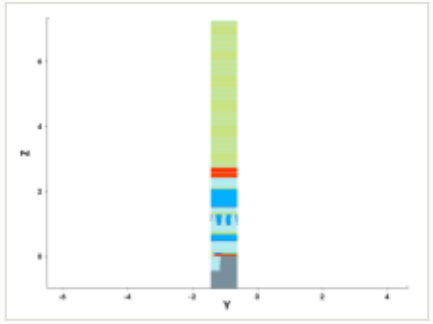


y cut at -1.035 µm

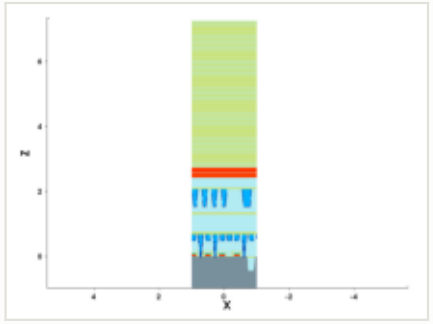

mask for this step

no mask for this step


steps by process area

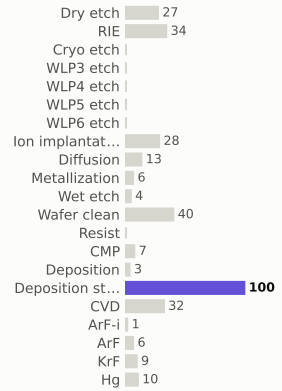

materials deposited (g)



gases emitted (g)

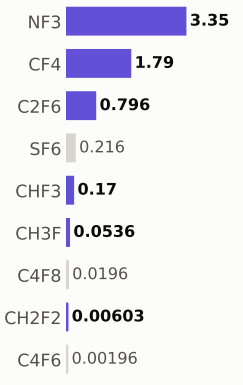


Step #4320: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	312.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

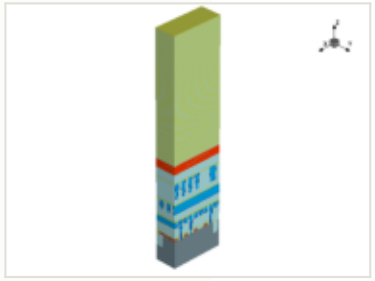


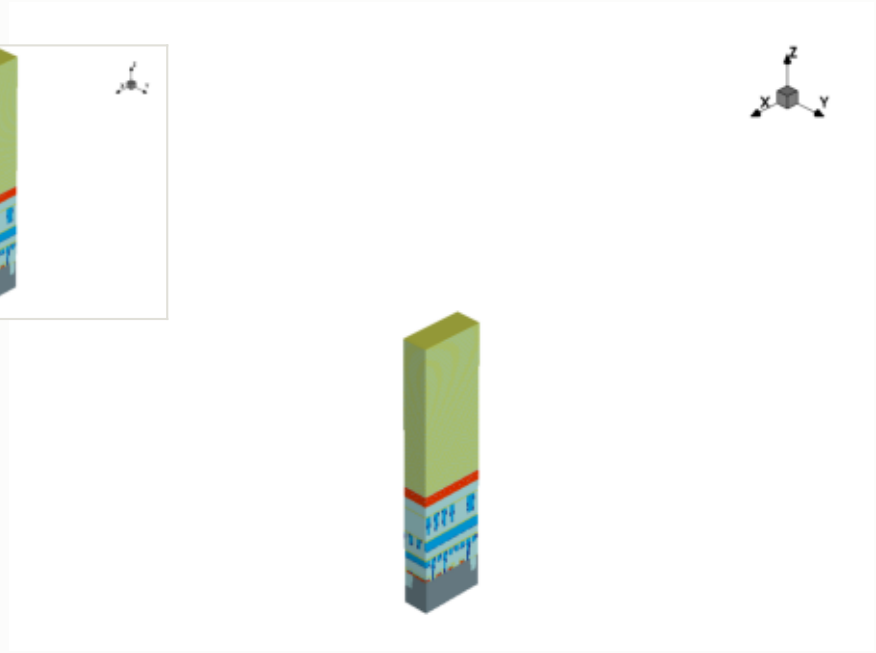

x cut at 0.000 µm

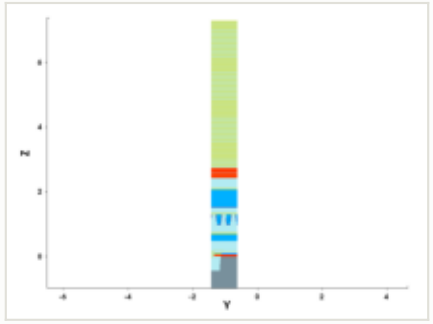

y cut at -1.035 µm

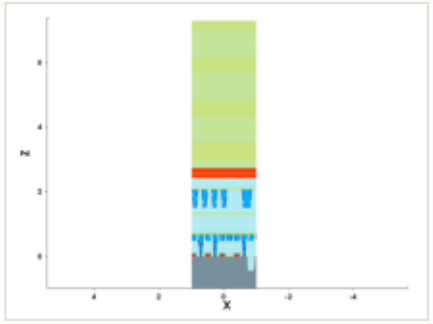


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

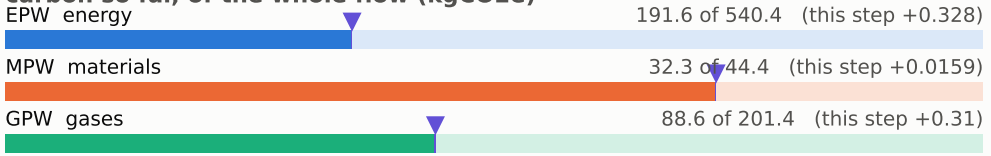

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

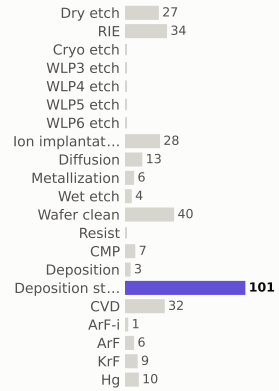

materials deposited (g)



gases emitted (g)

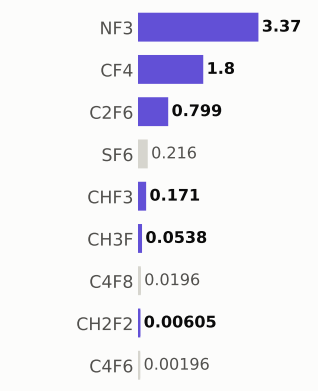

Step #4330: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	313.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




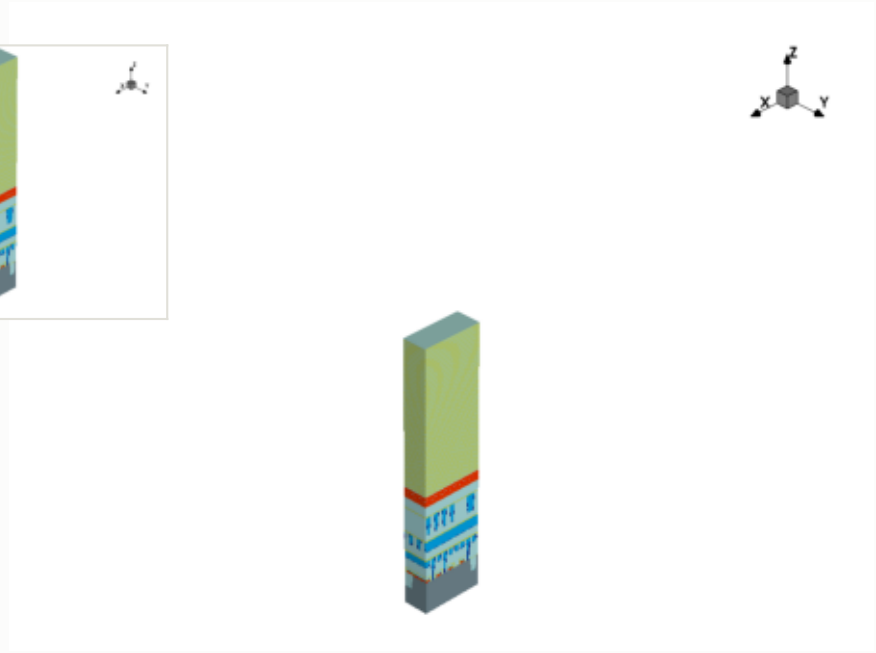


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

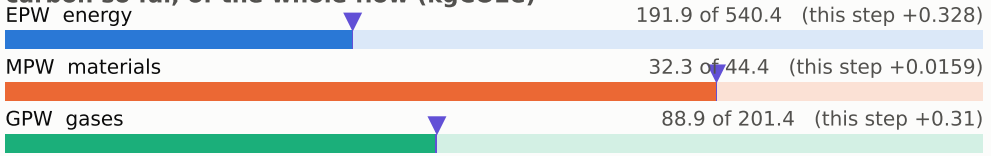


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

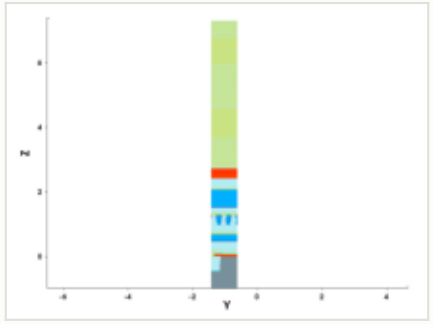


y cut at -1.035 µm

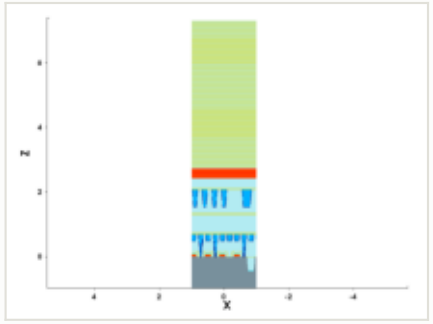


mask for this step

no mask for this step


steps by process area

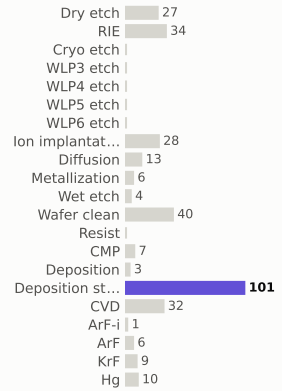

materials deposited (g)

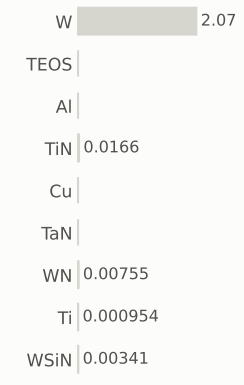

gases emitted (g)



Step #4340: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	313.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




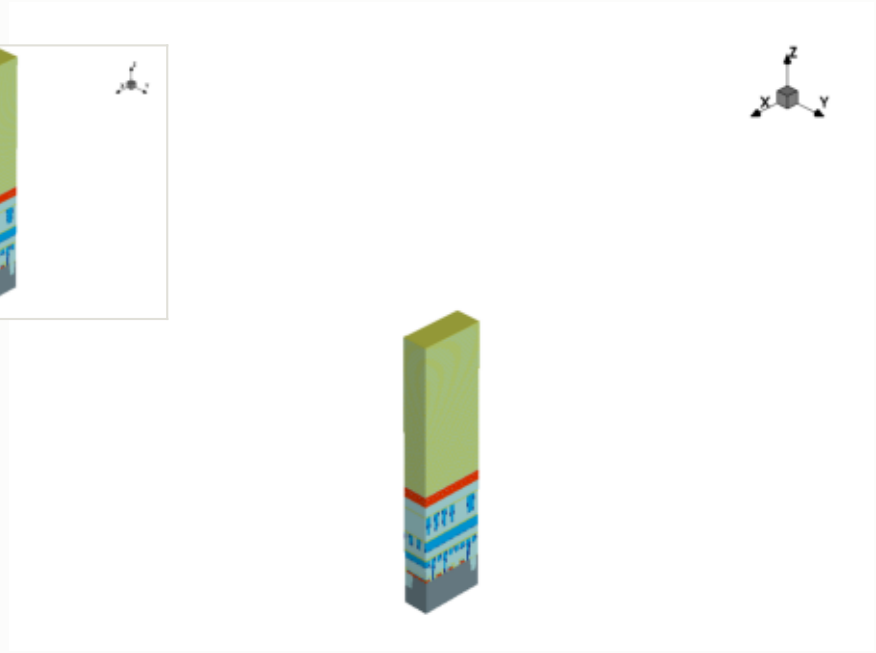


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

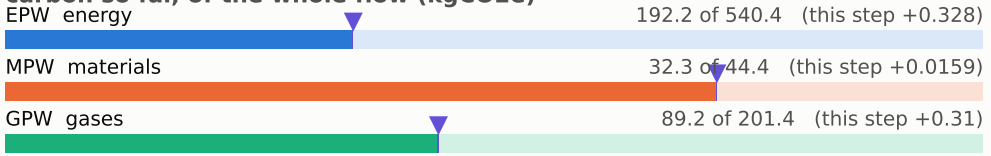


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

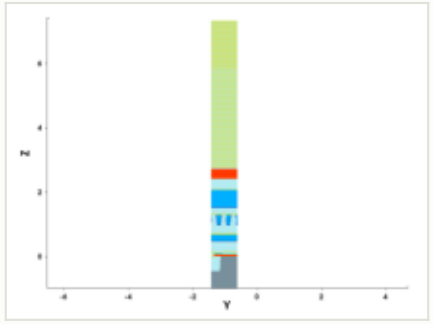


y cut at -1.035 µm

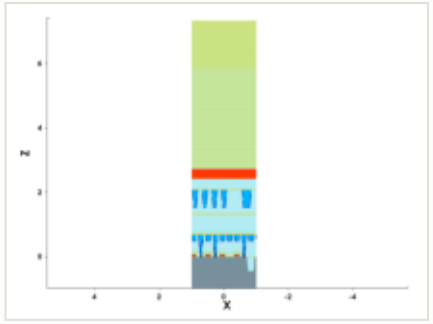

mask for this step

no mask for this step


steps by process area

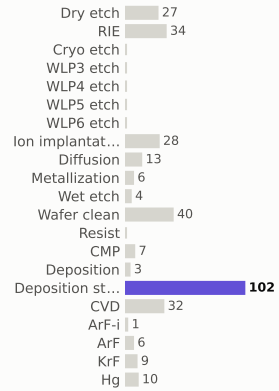

materials deposited (g)



gases emitted (g)

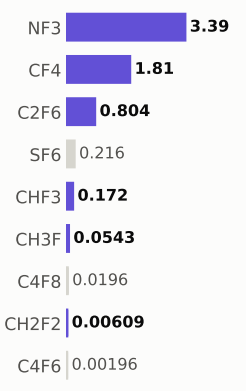

Step #4350: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	314.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




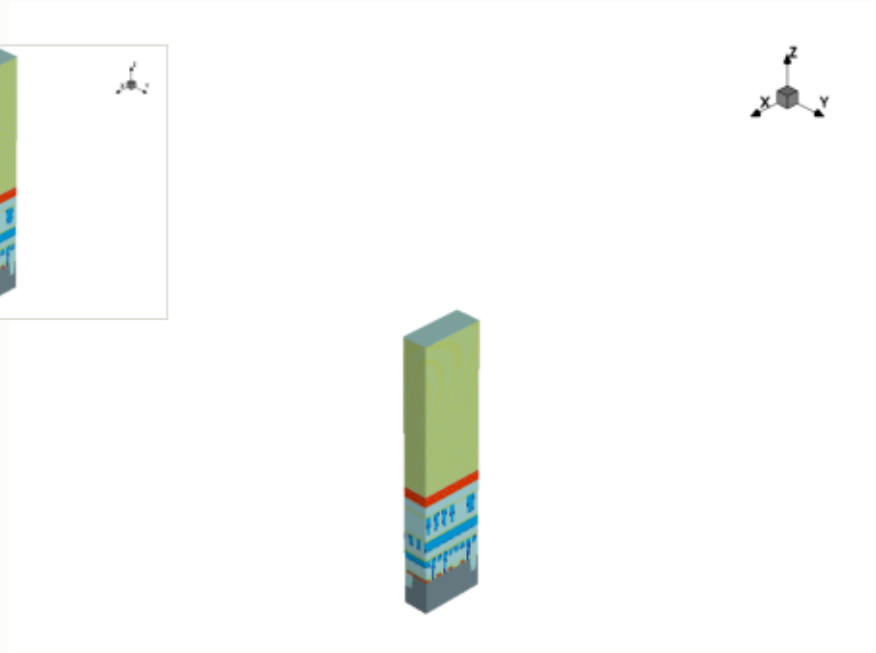


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

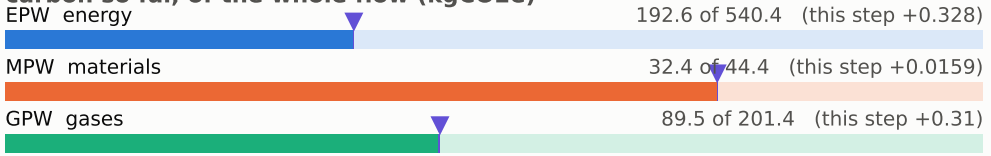


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

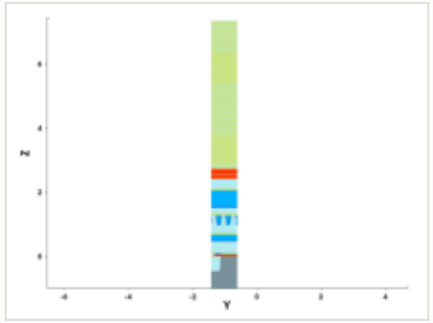


y cut at -1.035 µm

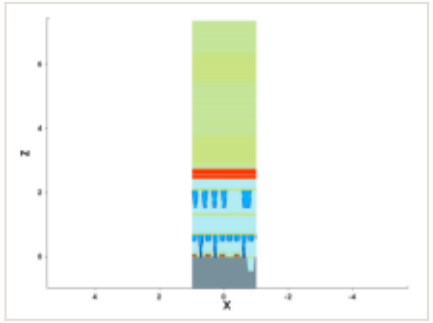

mask for this step

no mask for this step


steps by process area

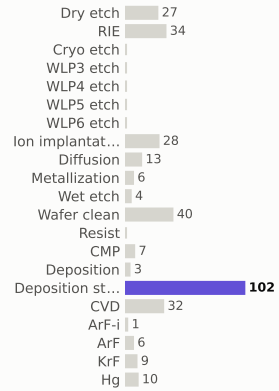

materials deposited (g)



gases emitted (g)

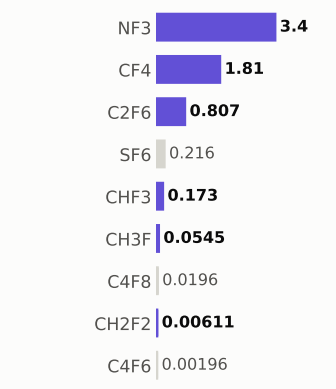


Step #4360: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	315.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

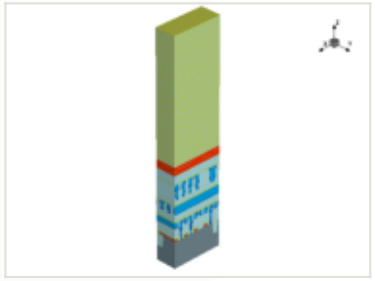


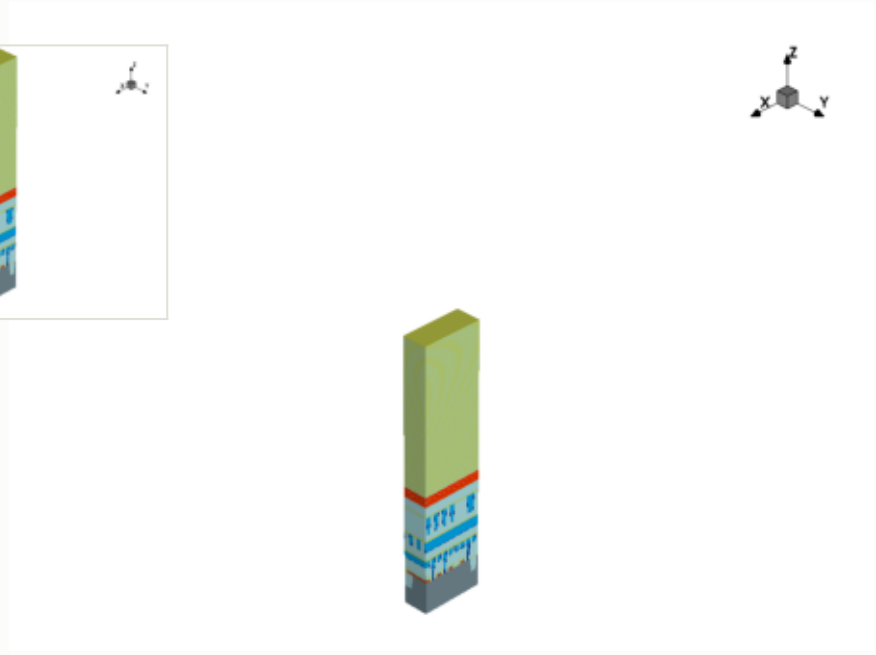


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

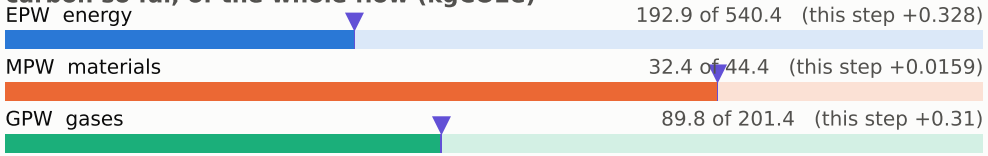


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

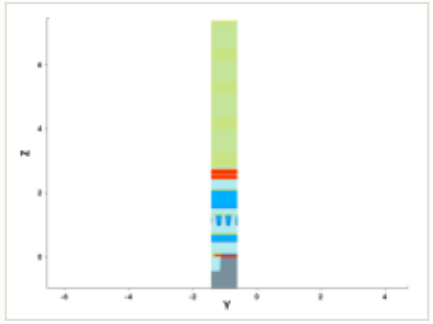


y cut at -1.035 µm

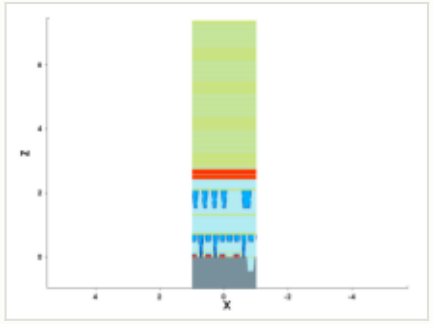

mask for this step

no mask for this step


steps by process area

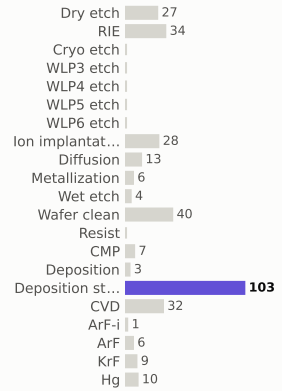

materials deposited (g)



gases emitted (g)

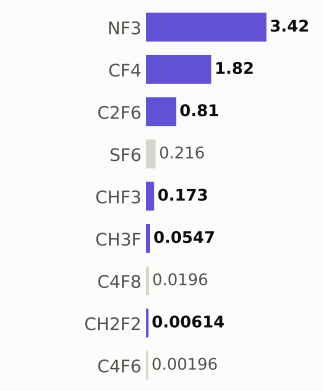


Step #4370: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	315.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

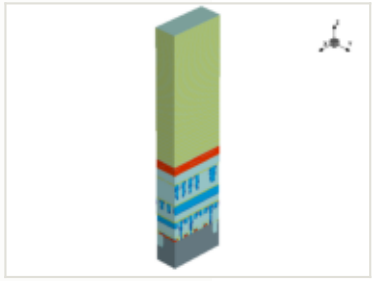


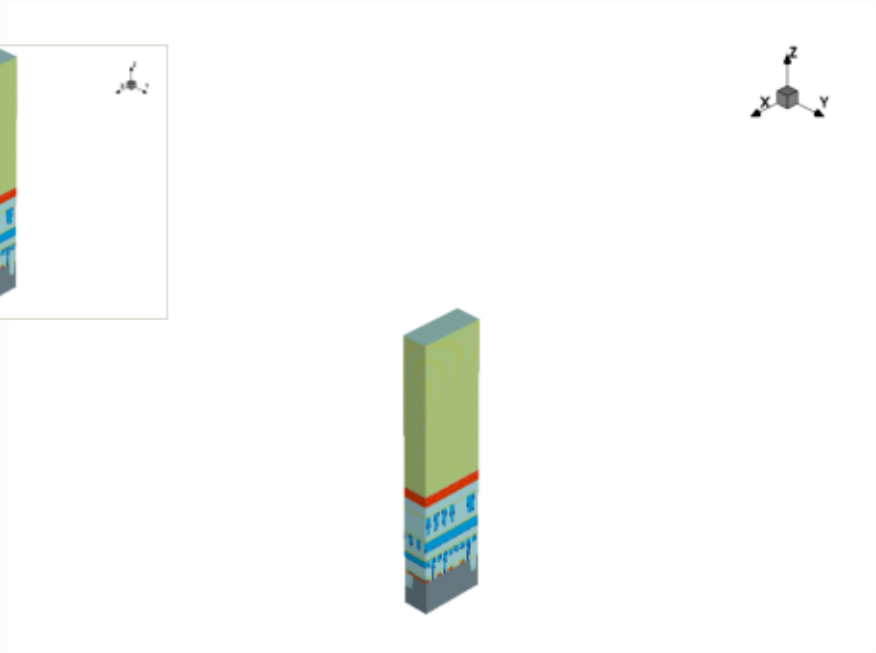


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

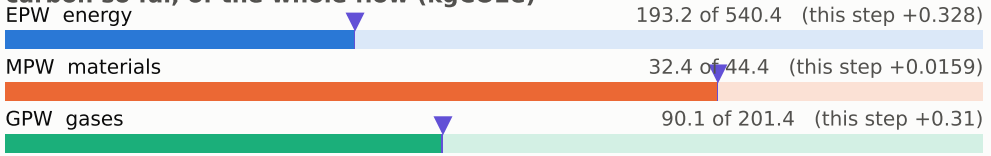


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

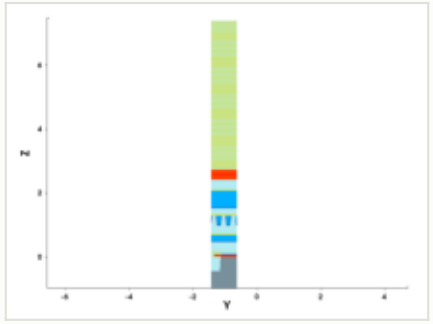


y cut at -1.035 µm

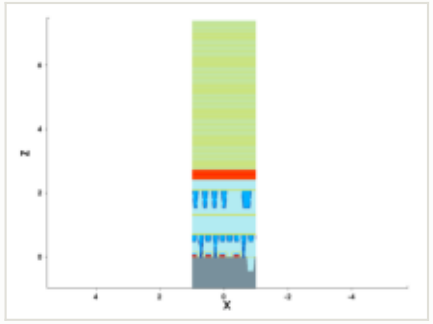


mask for this step

no mask for this step


steps by process area

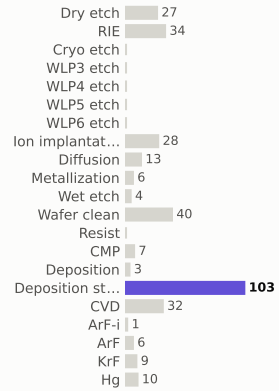

materials deposited (g)

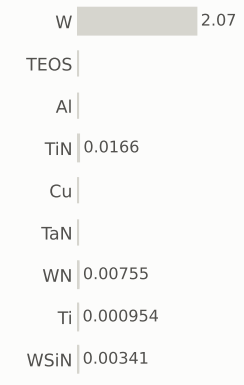

gases emitted (g)




Step #4380: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	316.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

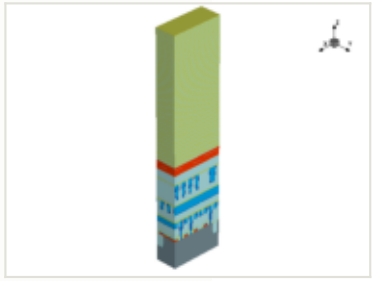


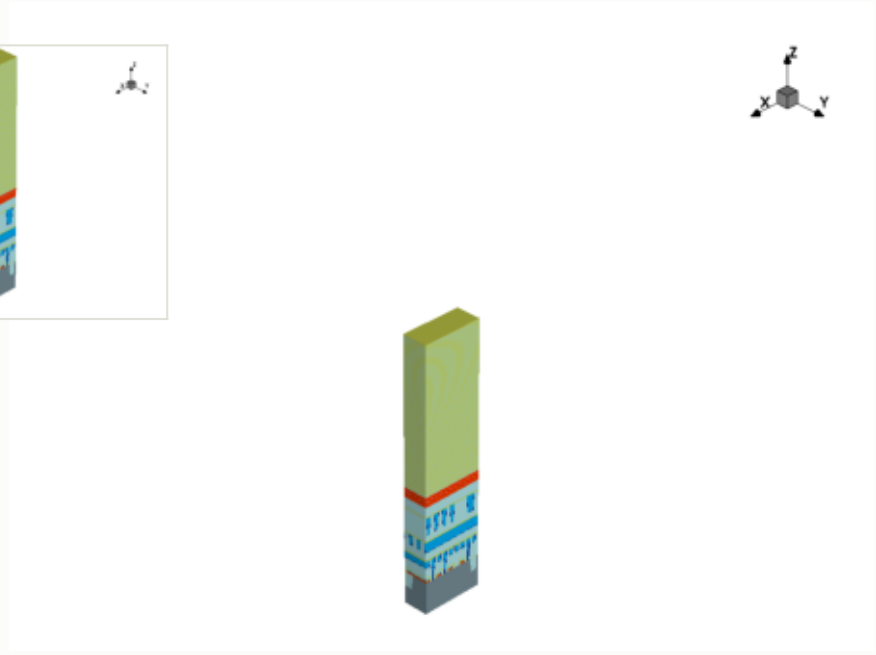


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

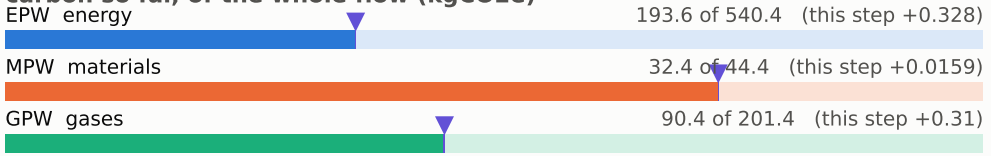


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

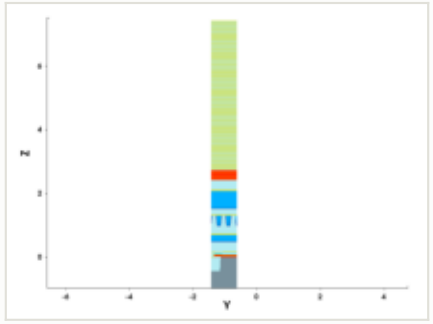


y cut at -1.035 µm

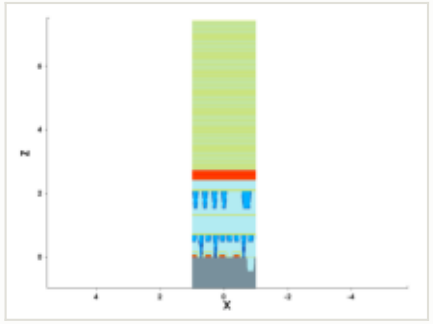

mask for this step

no mask for this step


steps by process area

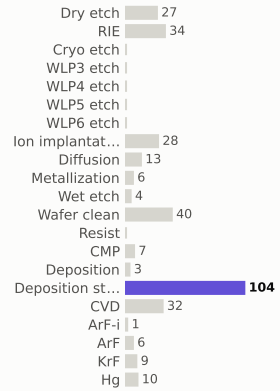

materials deposited (g)



gases emitted (g)

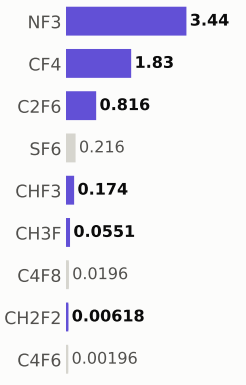


Step #4390: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	317.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

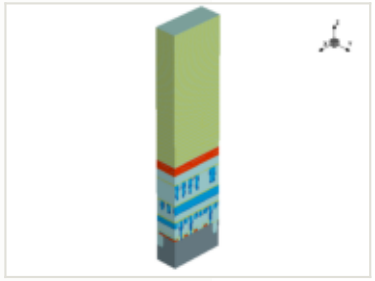


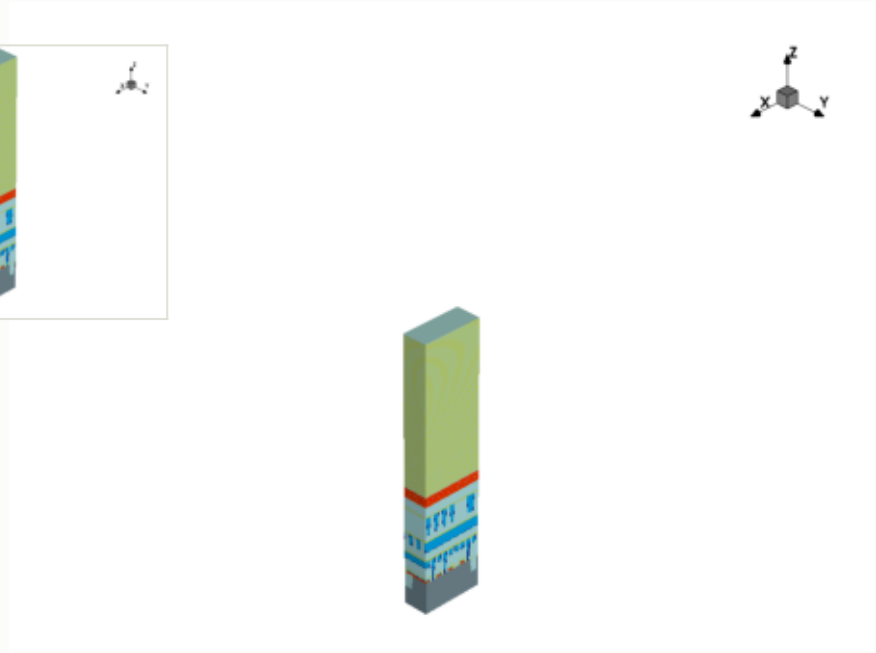


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

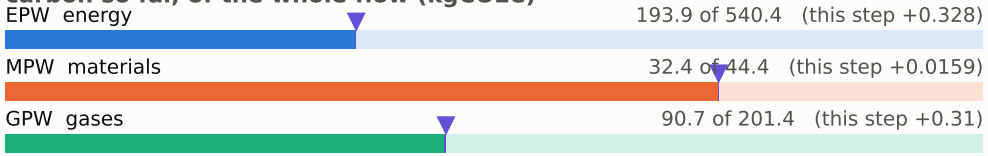


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

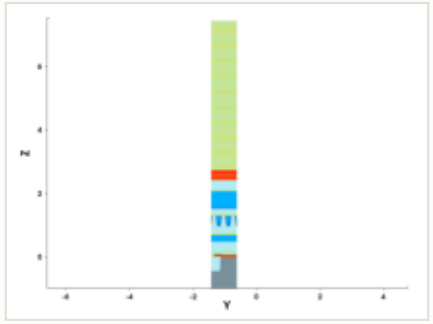


y cut at -1.035 µm

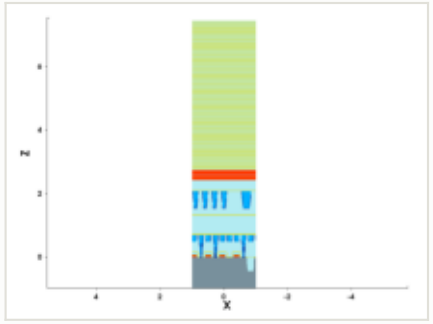

mask for this step

no mask for this step


steps by process area

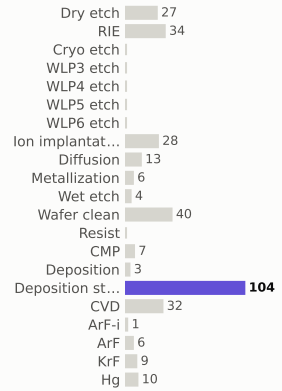

materials deposited (g)



gases emitted (g)




Step #4400: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	317.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

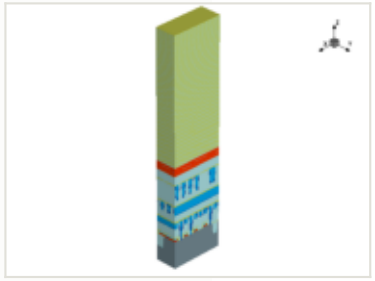


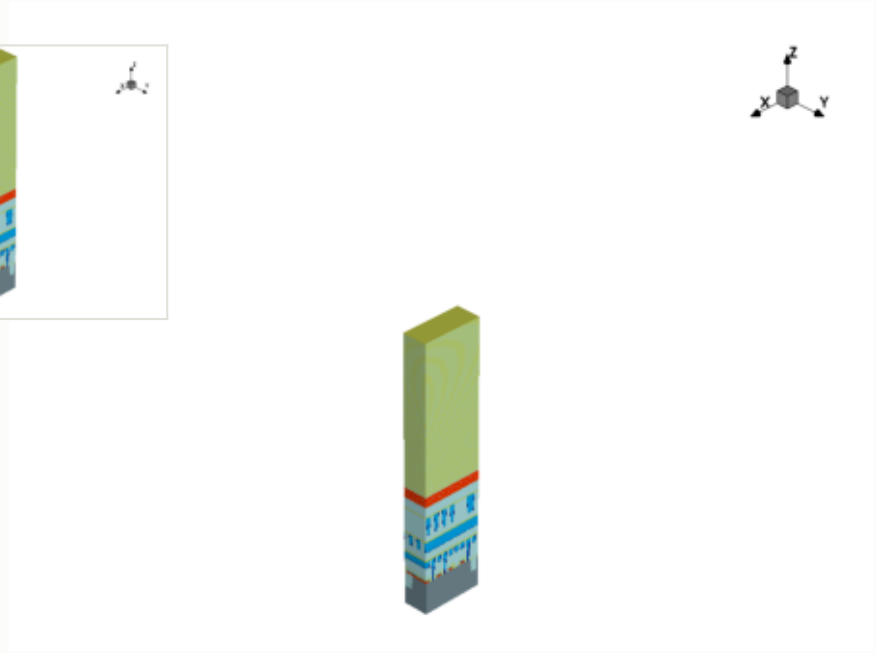


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

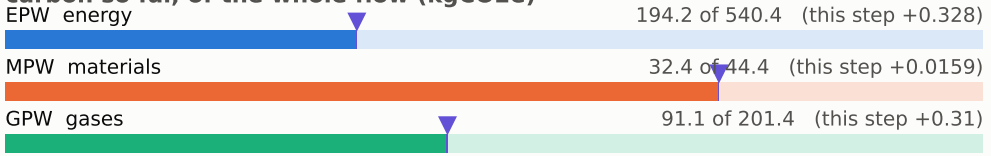


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

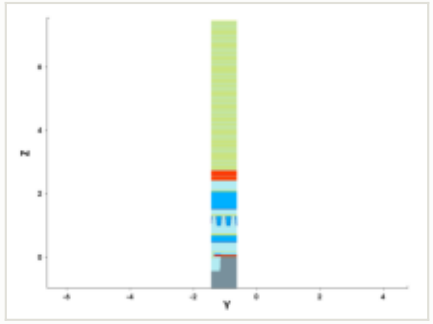


y cut at -1.035 µm

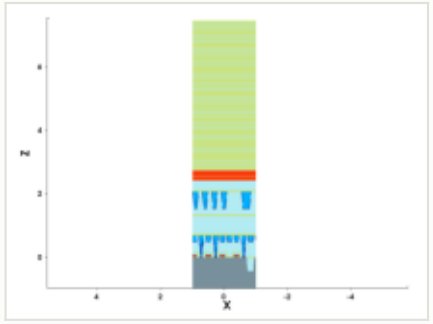

mask for this step

no mask for this step


steps by process area

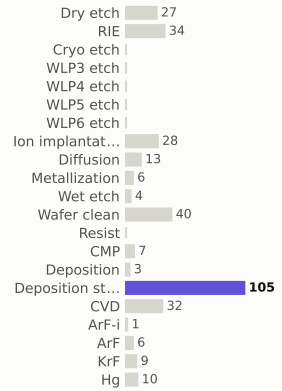

materials deposited (g)



gases emitted (g)




Step #4410: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	318.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

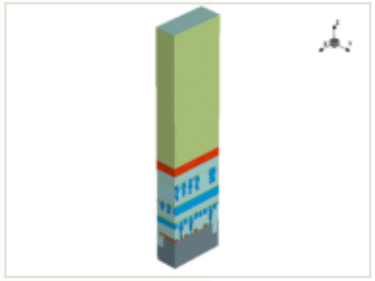


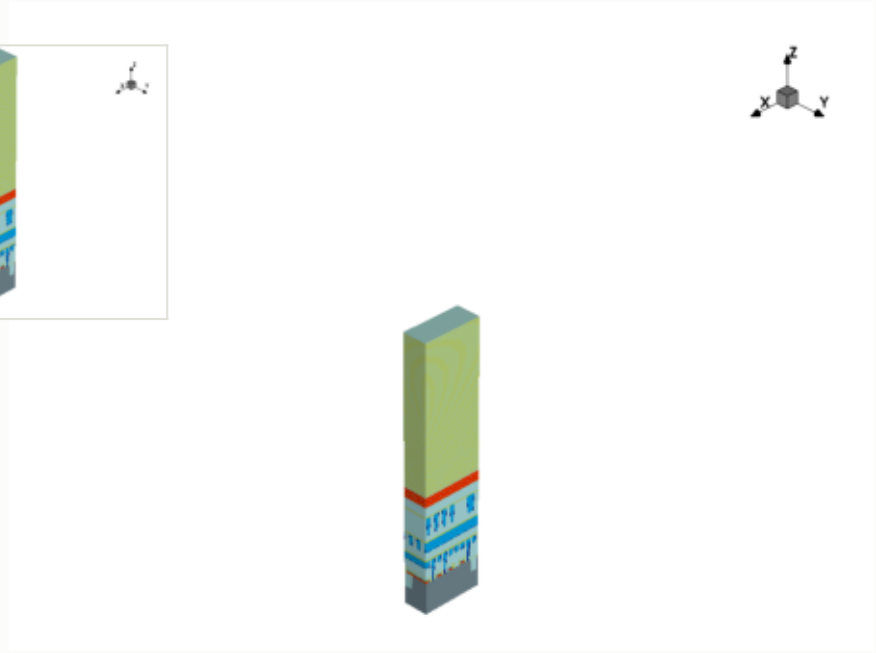


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

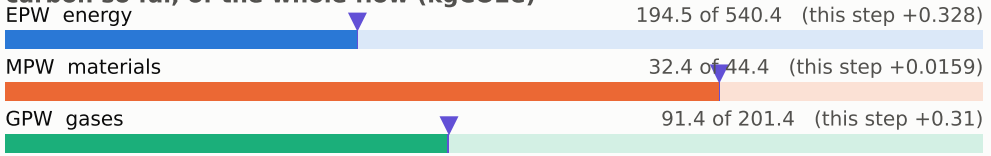


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

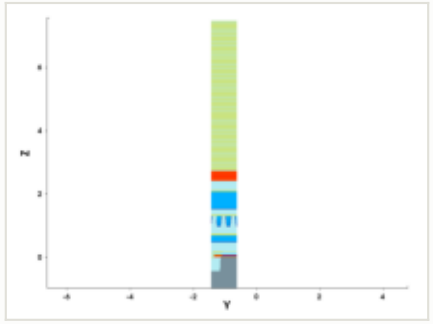


y cut at -1.035 µm

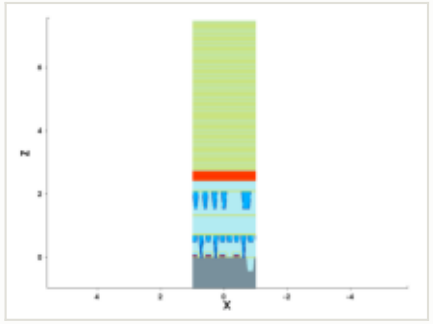

mask for this step

no mask for this step


steps by process area

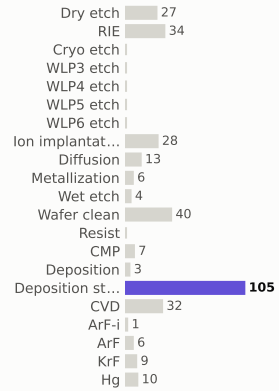

materials deposited (g)



gases emitted (g)

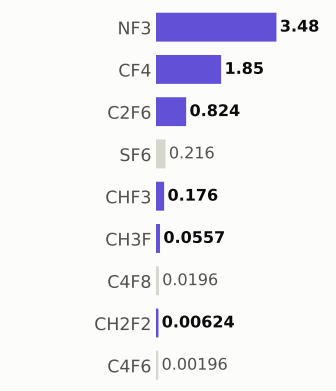


Step #4420: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	319.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

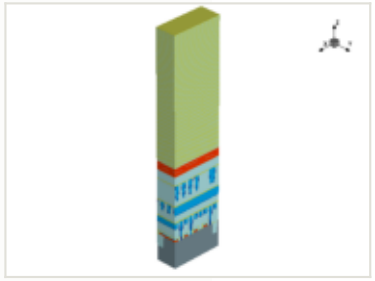


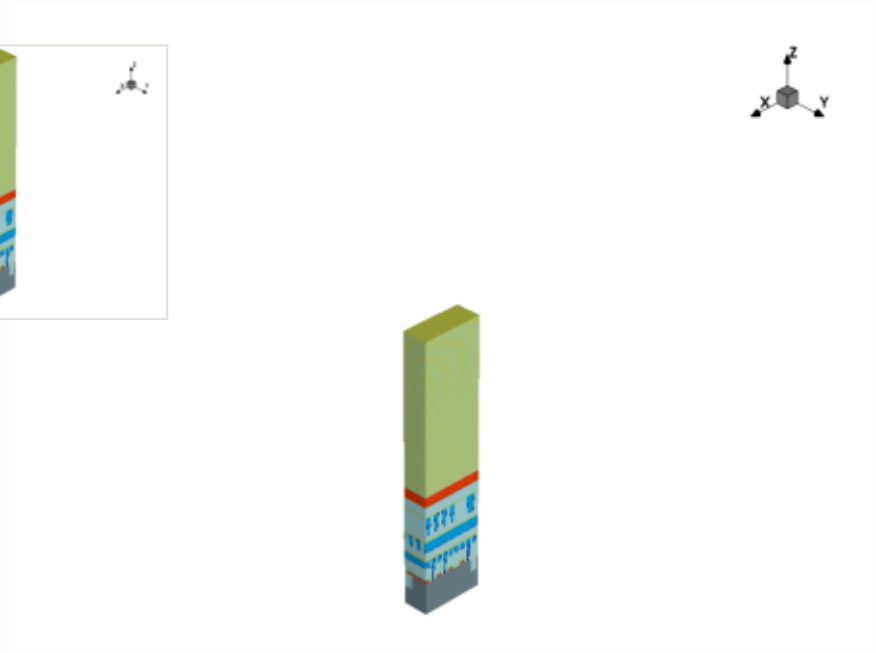


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

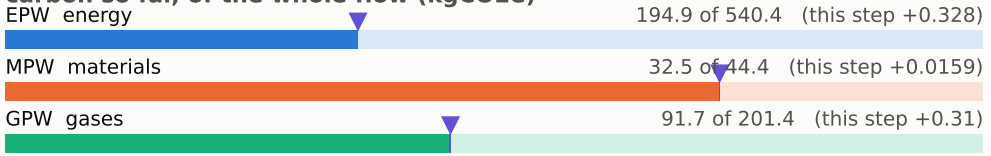


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

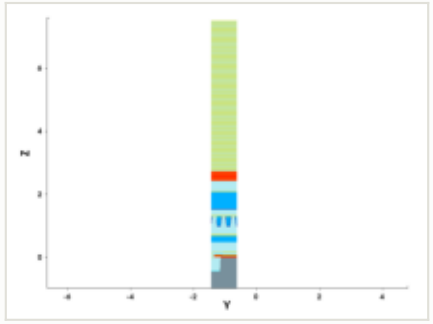


y cut at -1.035 µm

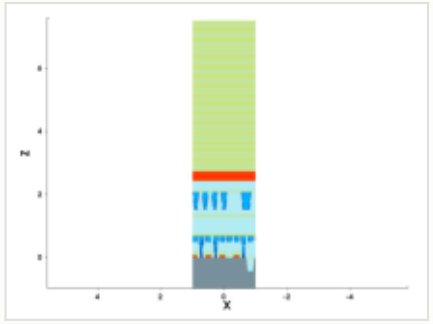

mask for this step

no mask for this step


steps by process area

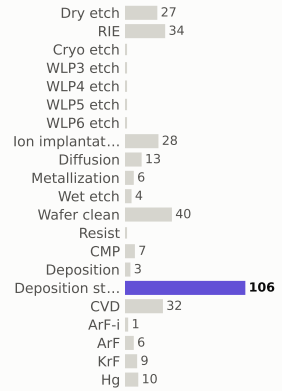

materials deposited (g)



gases emitted (g)




Step #4430: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	319.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

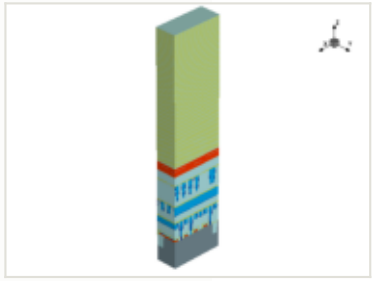


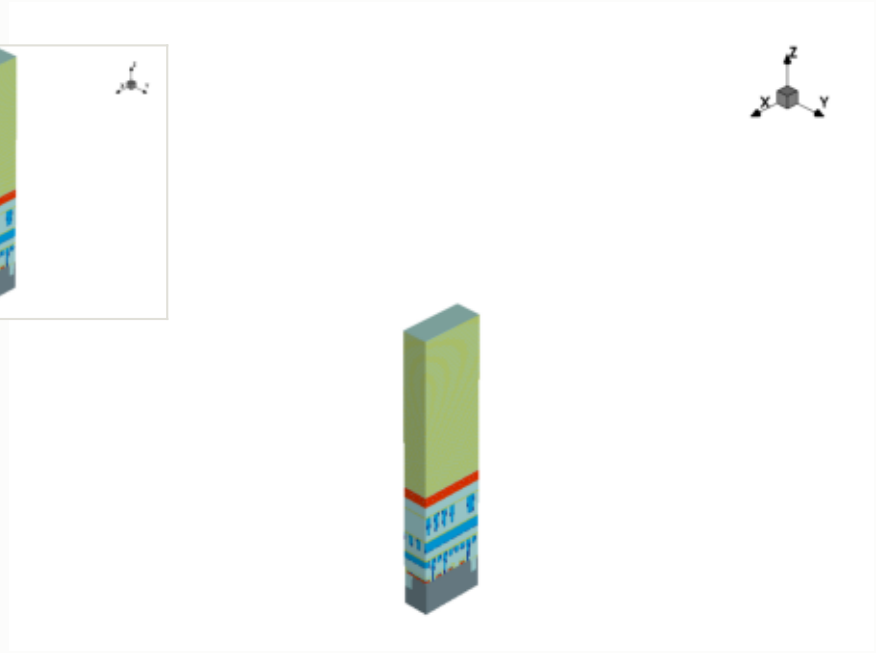


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

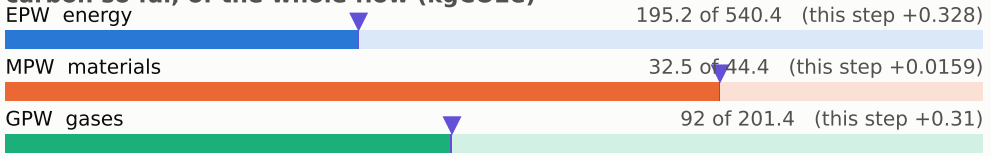


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

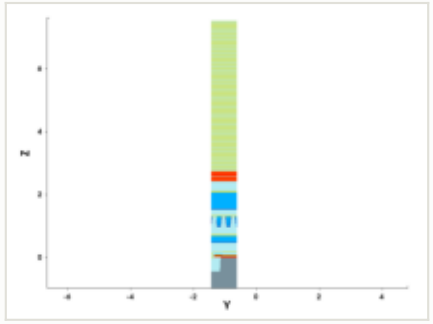


y cut at -1.035 µm

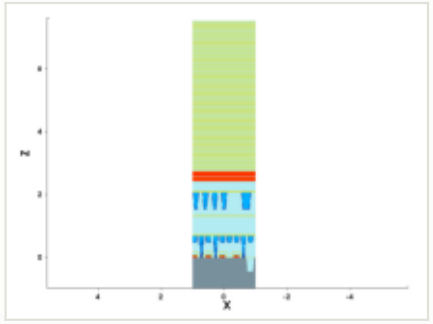

mask for this step

no mask for this step


steps by process area

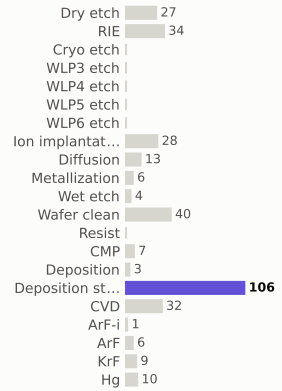

materials deposited (g)



gases emitted (g)




Step #4440: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	320.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

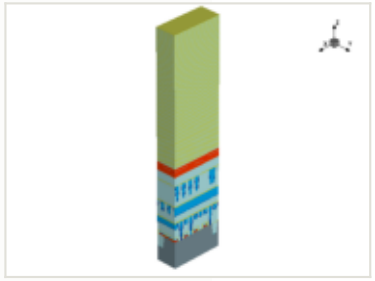


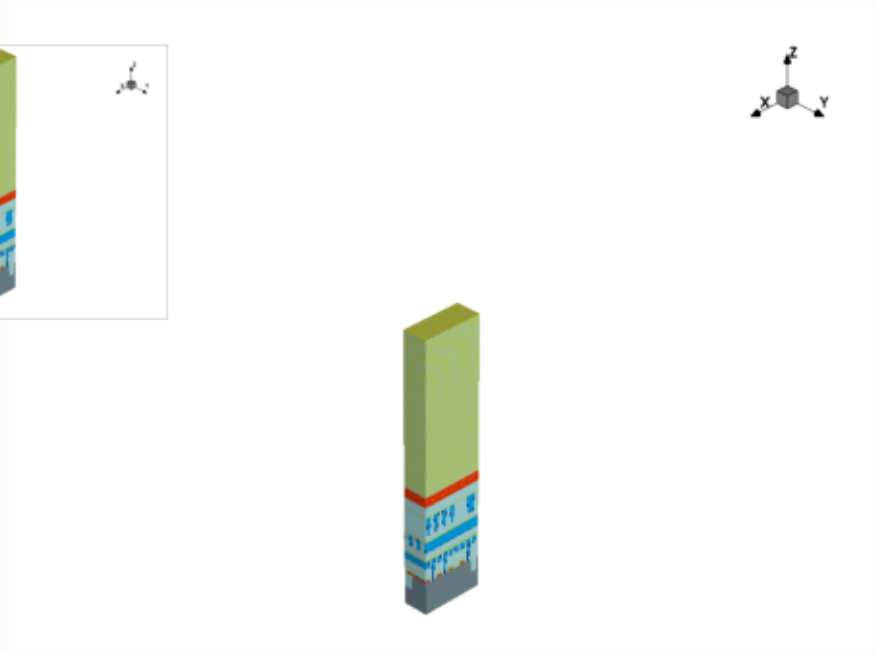


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

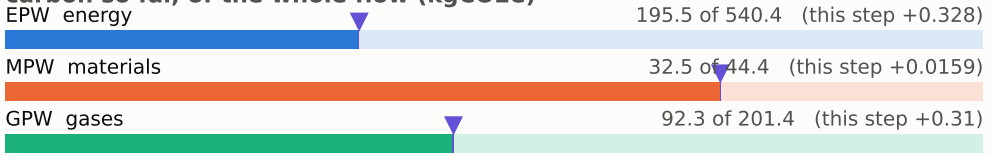


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

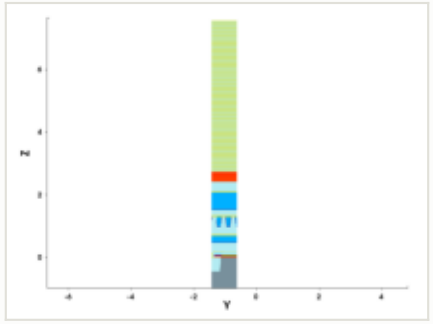


y cut at -1.035 µm

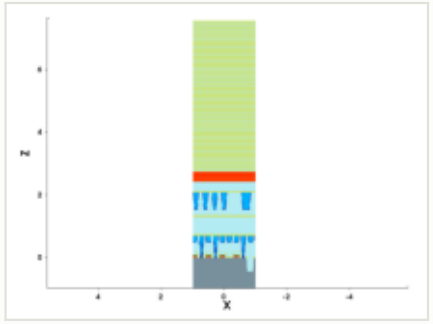


mask for this step

no mask for this step


steps by process area

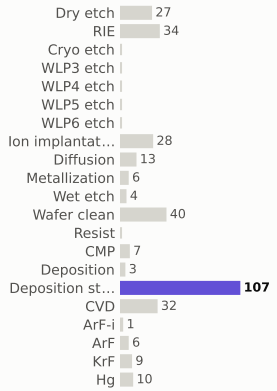

materials deposited (g)

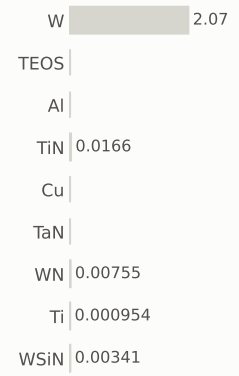

gases emitted (g)




Step #4450: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	321.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

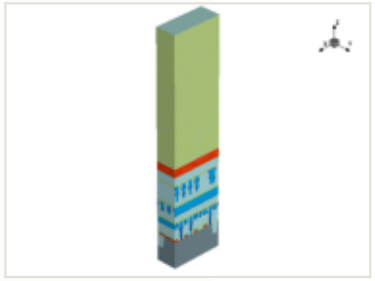


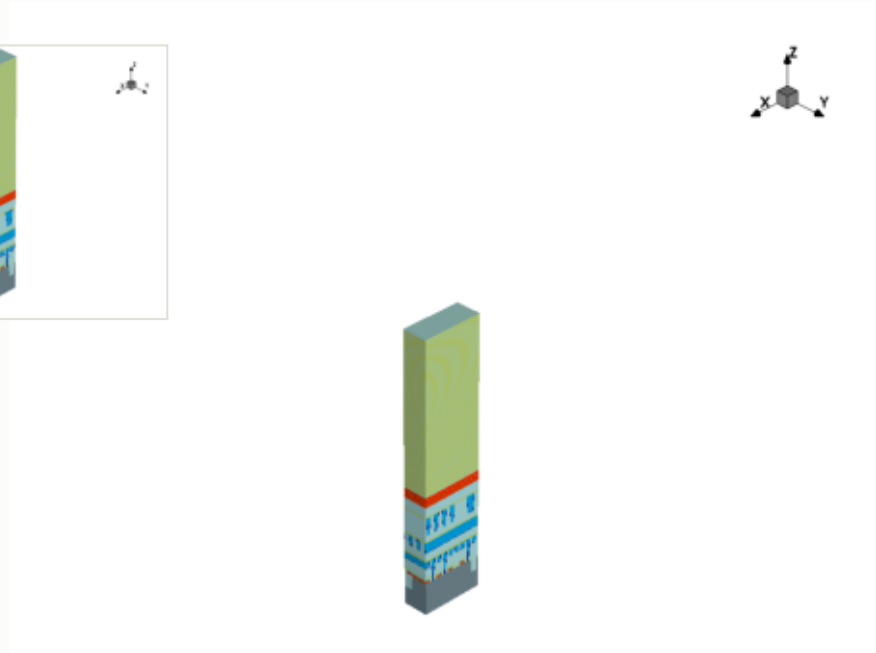


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

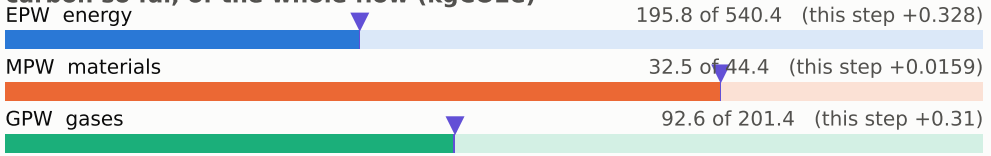


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

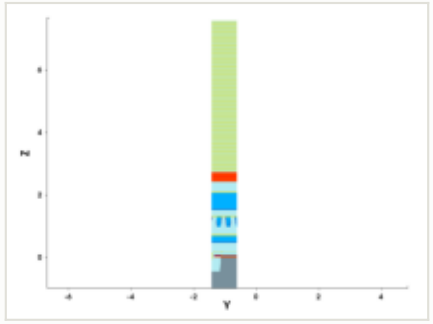


y cut at -1.035 µm

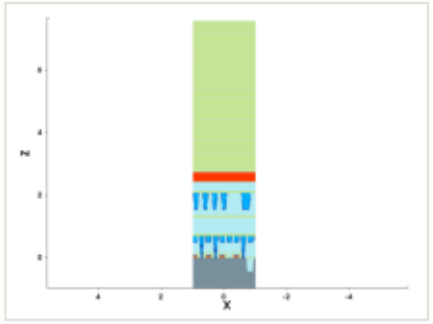

mask for this step

no mask for this step


steps by process area

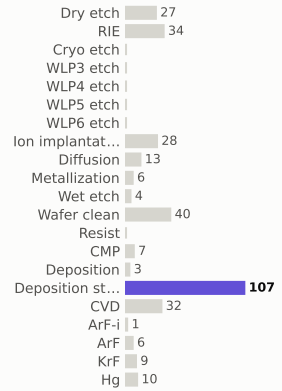

materials deposited (g)



gases emitted (g)




Step #4460: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	321.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

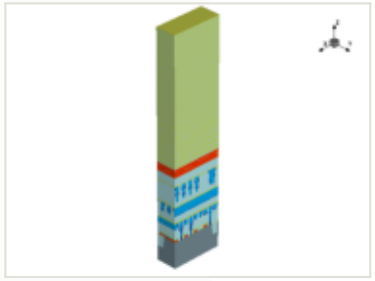


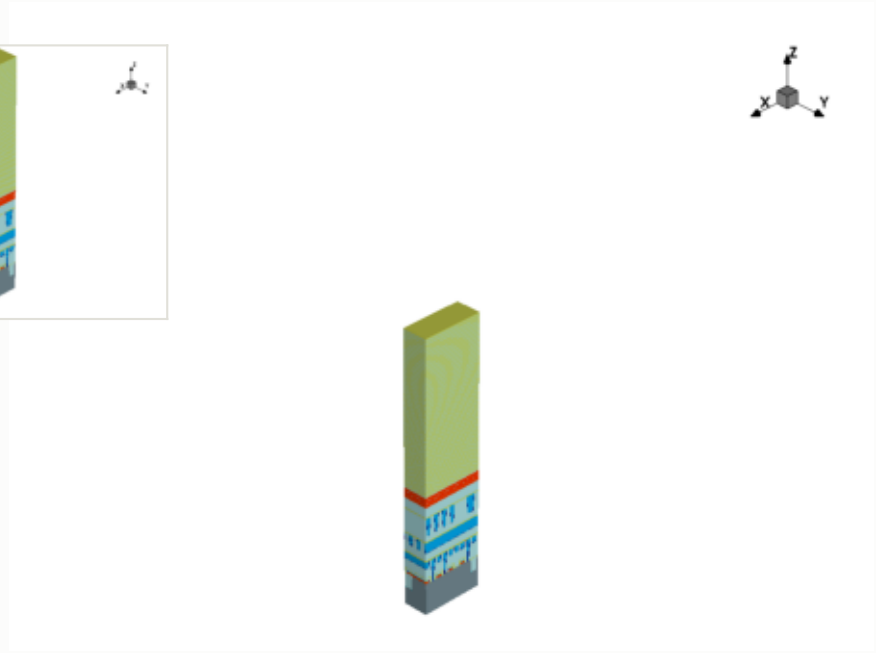


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

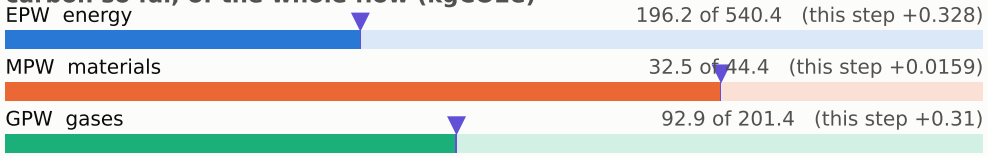


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

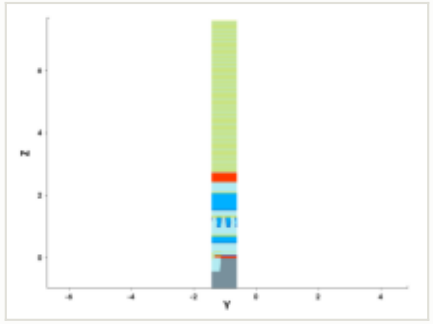


y cut at -1.035 µm

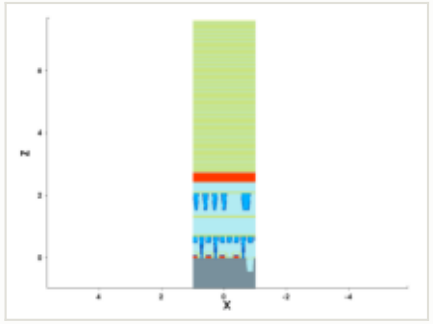

mask for this step

no mask for this step


steps by process area

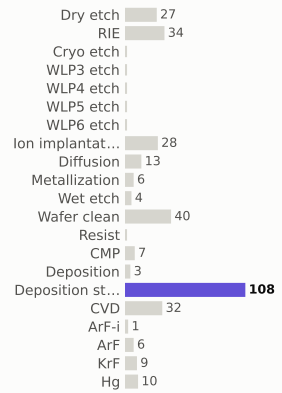

materials deposited (g)



gases emitted (g)




Step #4470: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	322.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

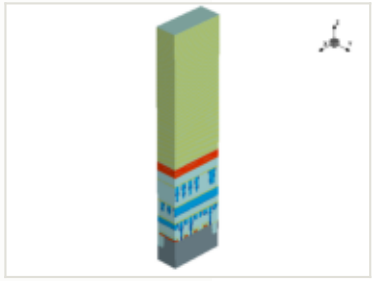


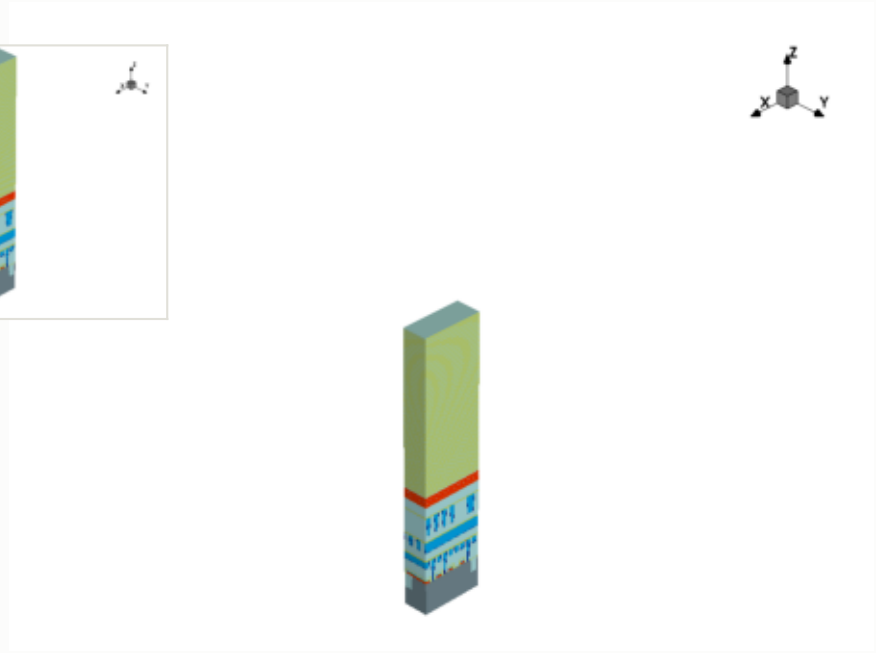


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

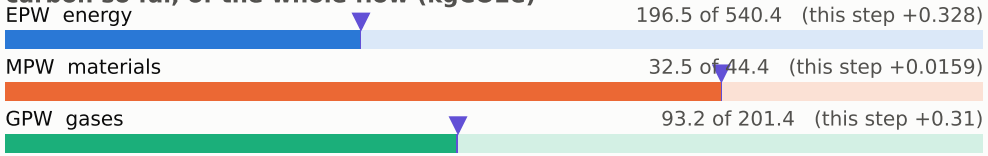


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

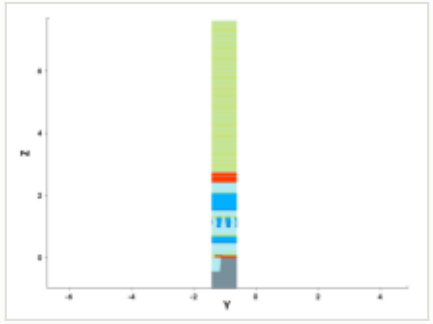


y cut at -1.035 µm

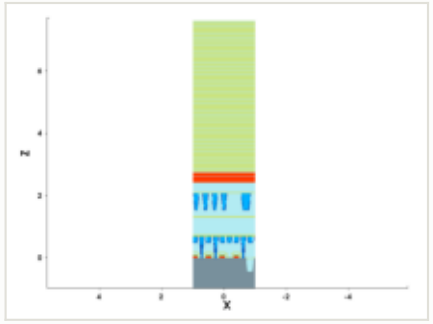


mask for this step

no mask for this step


steps by process area

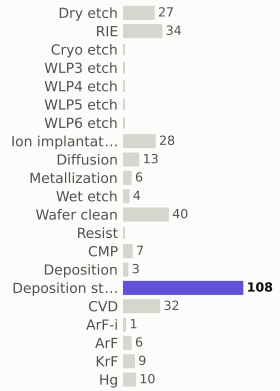

materials deposited (g)

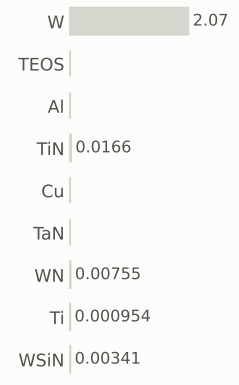

gases emitted (g)




Step #4480: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	322.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

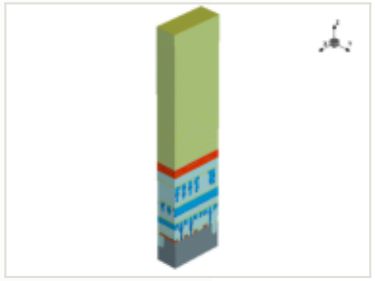


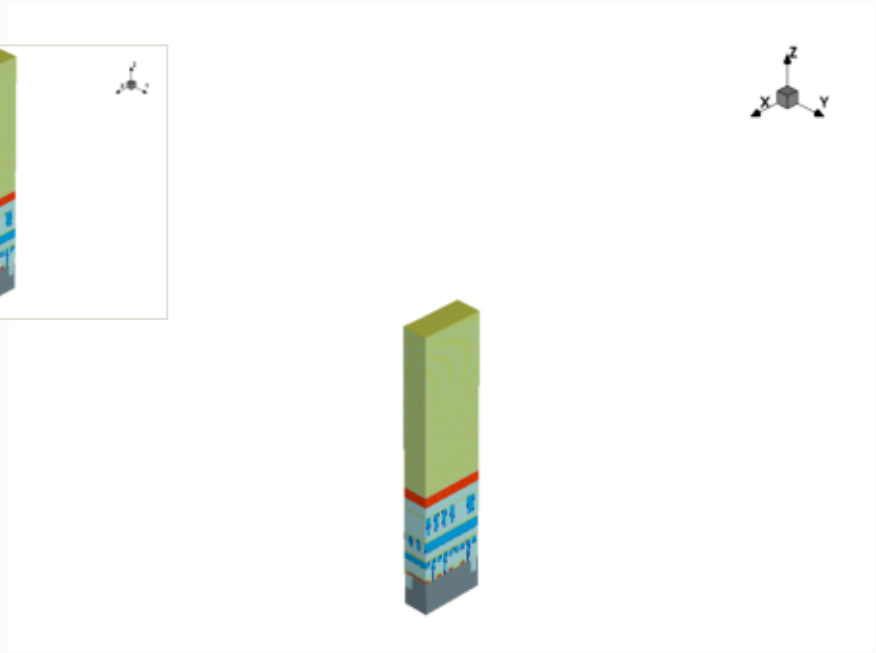

x cut at 0.000 µm

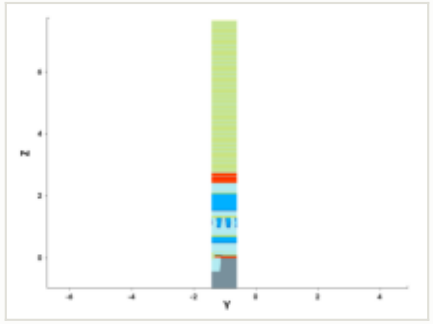

y cut at -1.035 µm

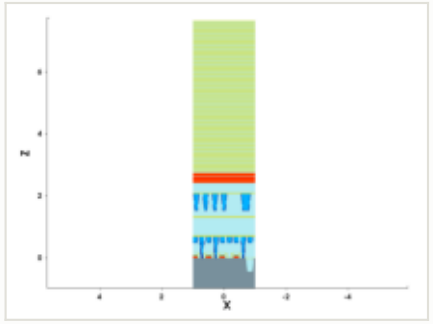


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

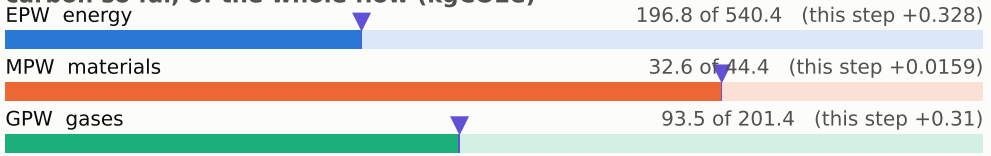

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

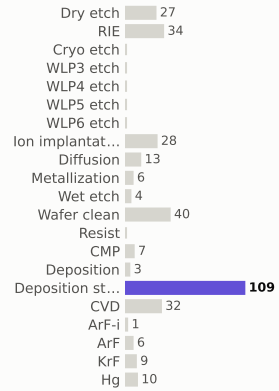

materials deposited (g)



gases emitted (g)




Step #4490: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	323.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

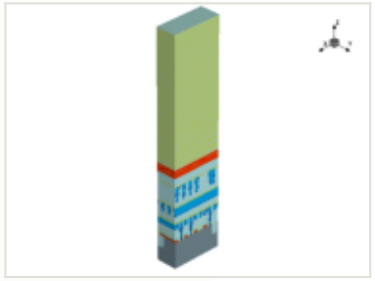


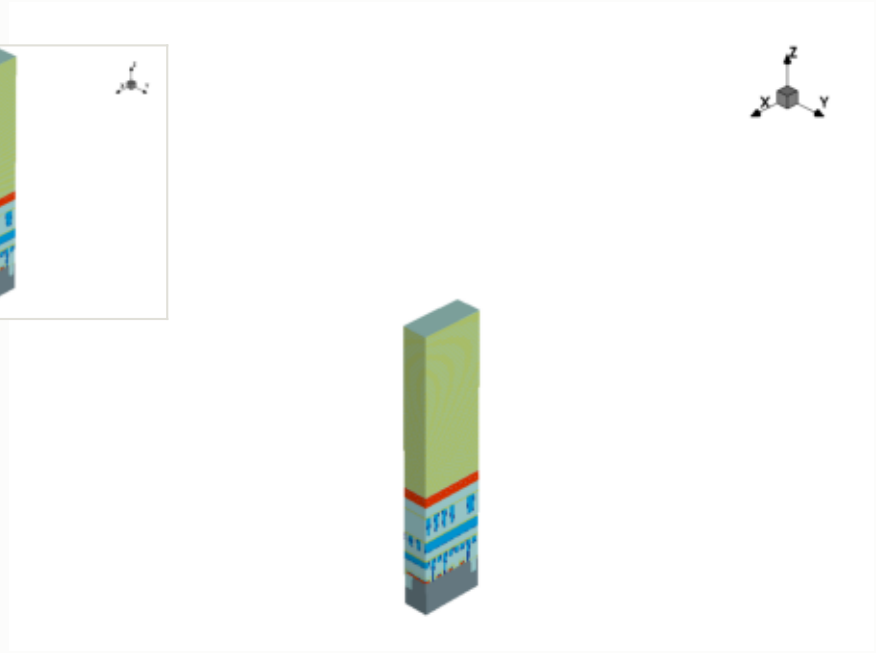


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

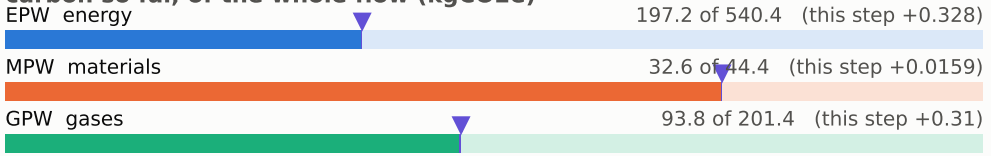


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

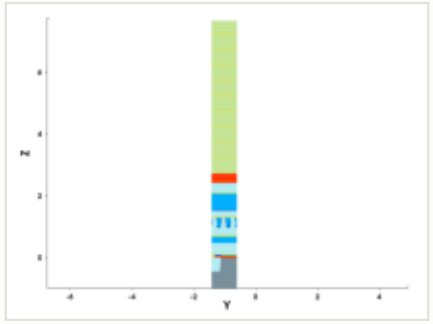


y cut at -1.035 µm

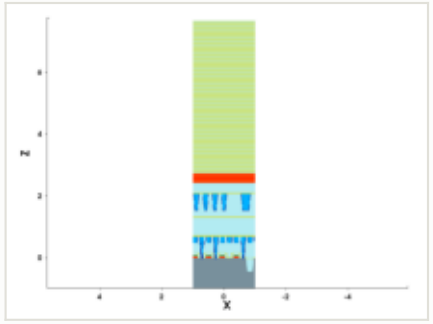

mask for this step

no mask for this step


steps by process area

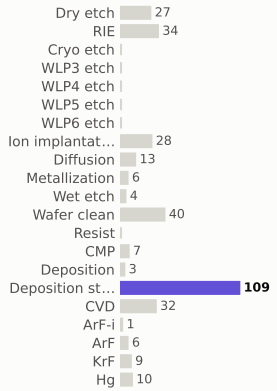

materials deposited (g)



gases emitted (g)

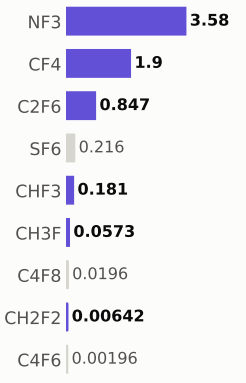


Step #4500: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	324.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

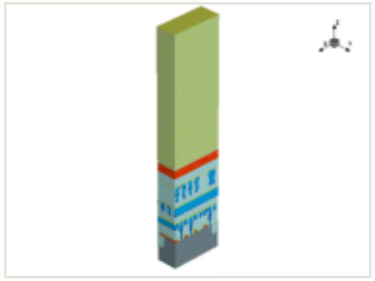


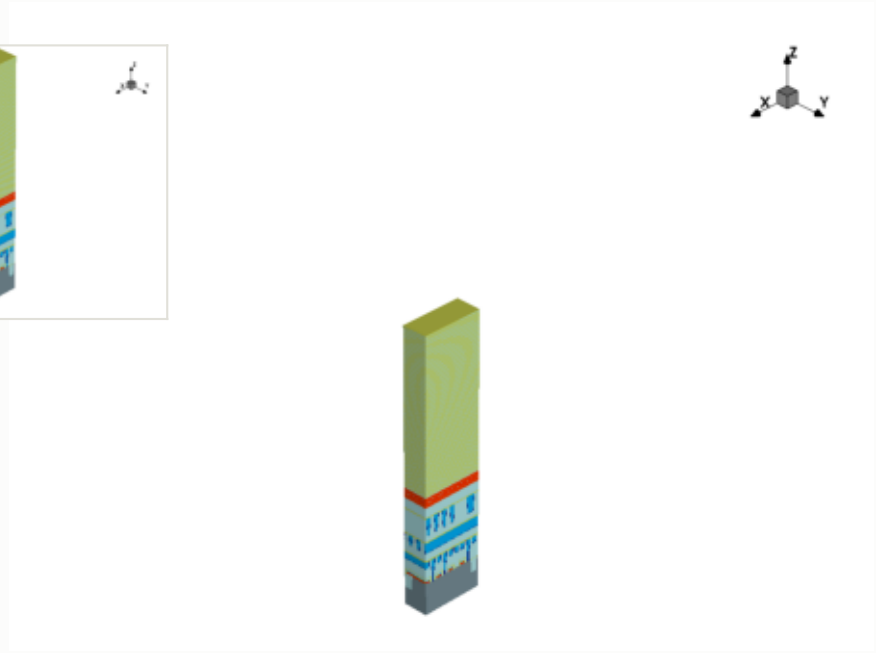


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

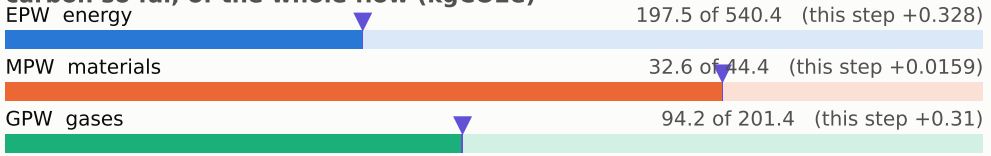


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

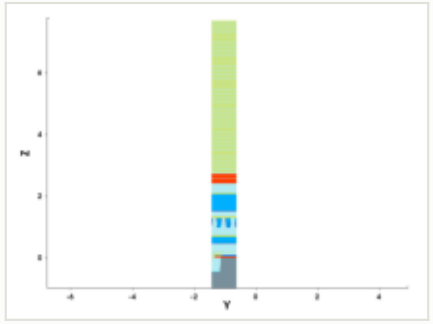


y cut at -1.035 µm

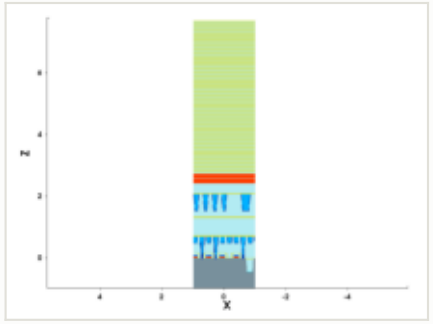

mask for this step

no mask for this step


steps by process area

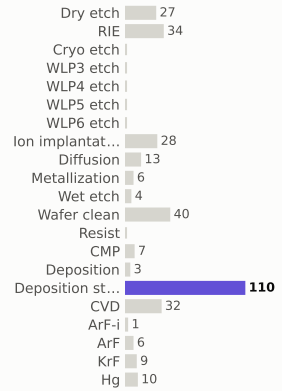

materials deposited (g)



gases emitted (g)

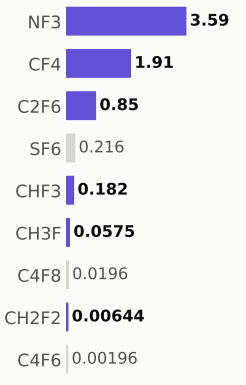


Step #4510: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	324.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

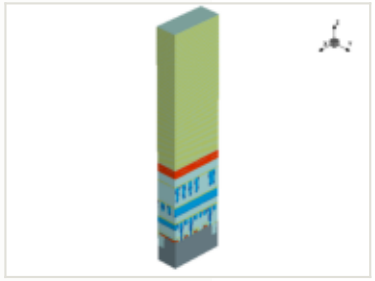


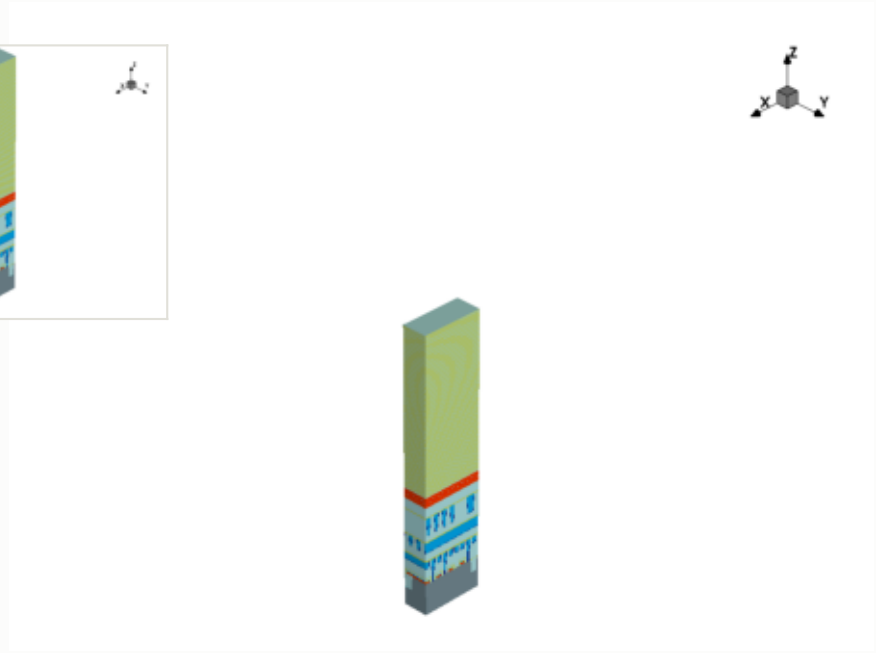


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

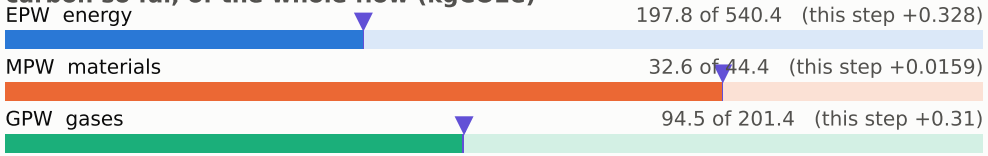


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

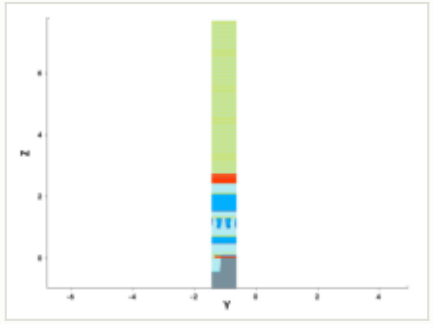


y cut at -1.035 µm

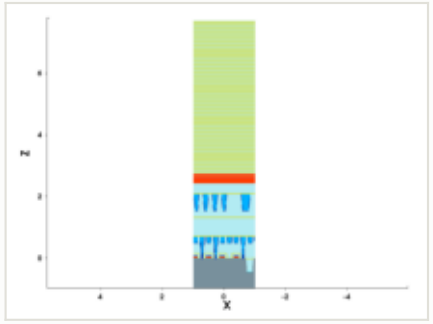

mask for this step

no mask for this step


steps by process area

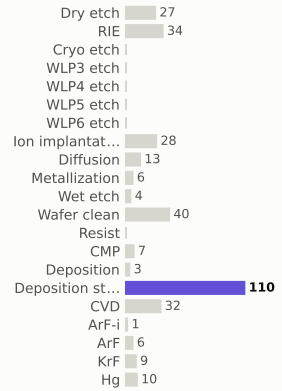

materials deposited (g)



gases emitted (g)




Step #4520: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	325.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

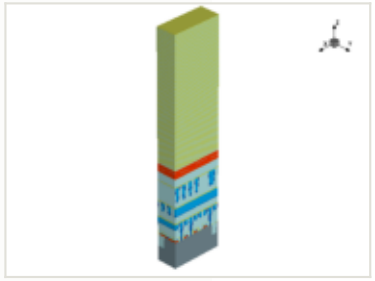


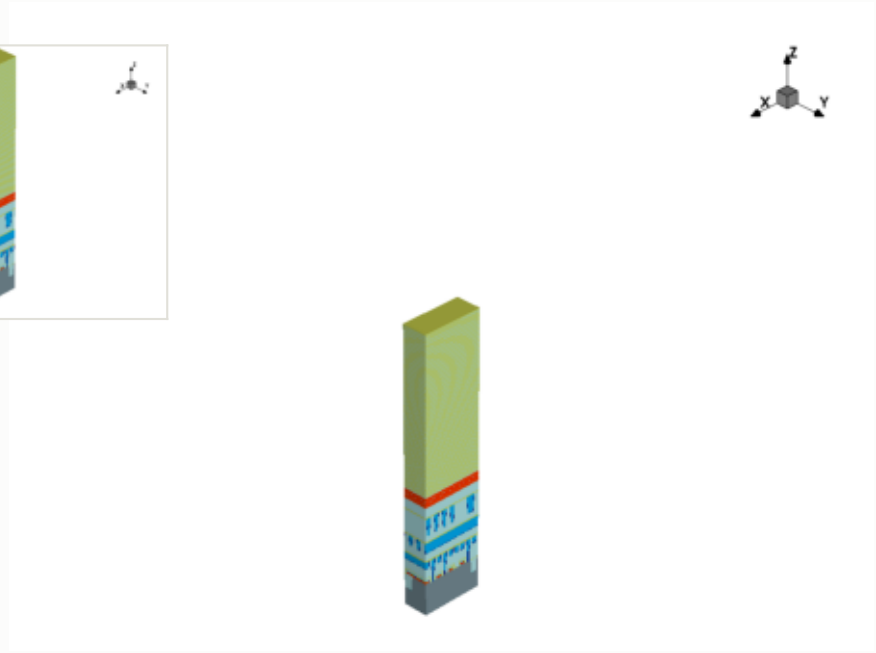


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

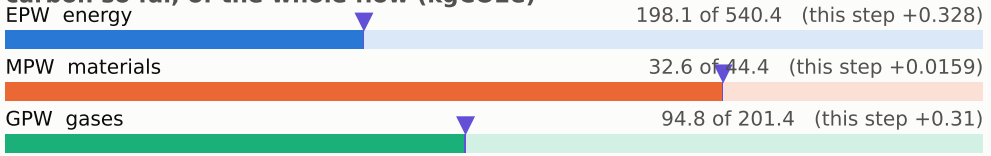


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

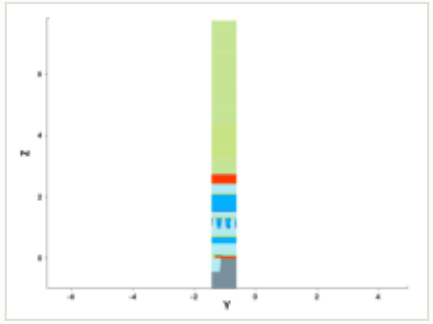


y cut at -1.035 µm

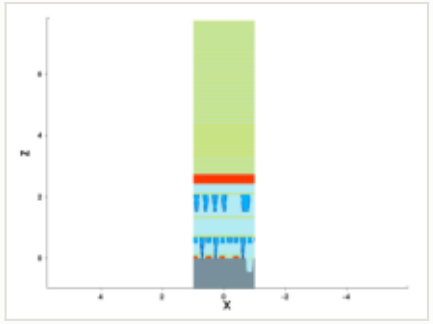

mask for this step

no mask for this step


steps by process area

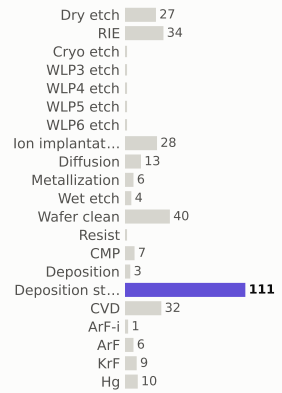

materials deposited (g)



gases emitted (g)

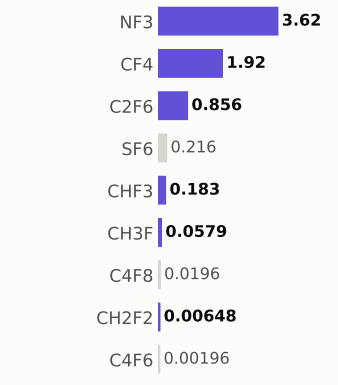


Step #4530: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	326.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

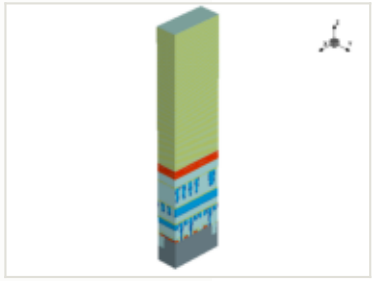





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

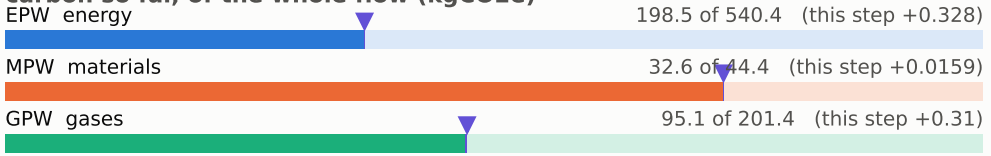


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

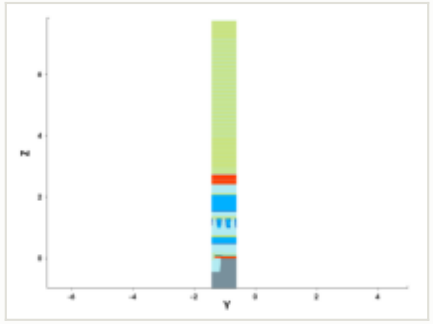


y cut at -1.035 µm

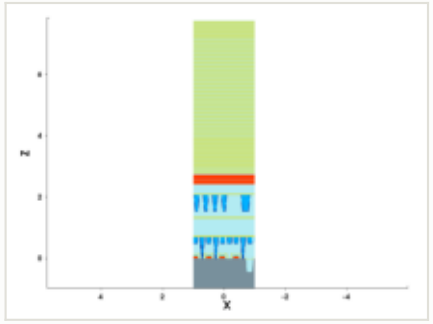


mask for this step

no mask for this step


steps by process area

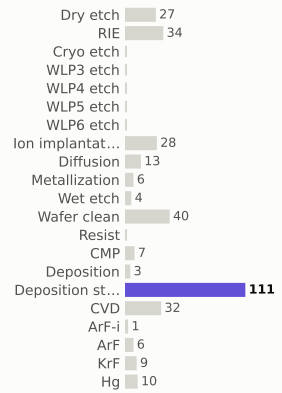

materials deposited (g)

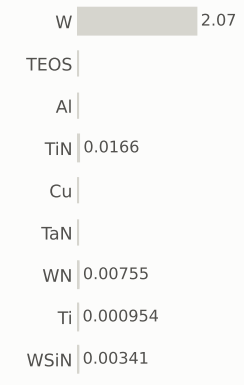

gases emitted (g)




Step #4540: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	326.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

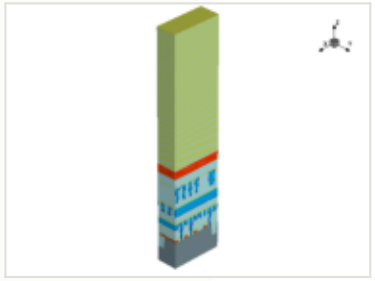


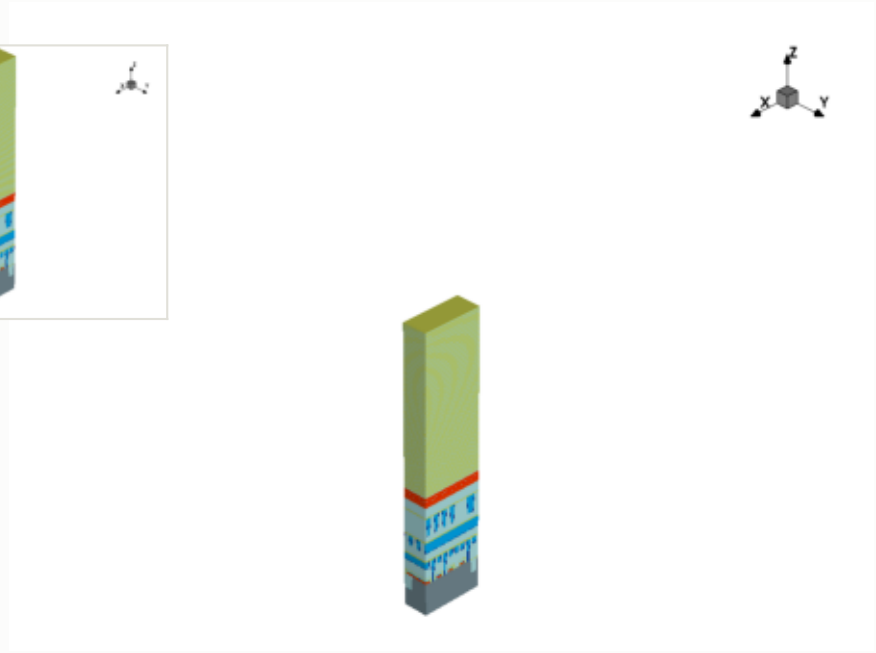


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

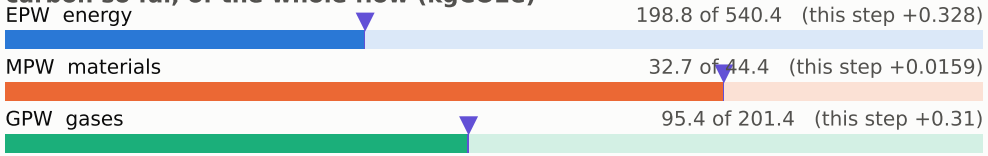


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

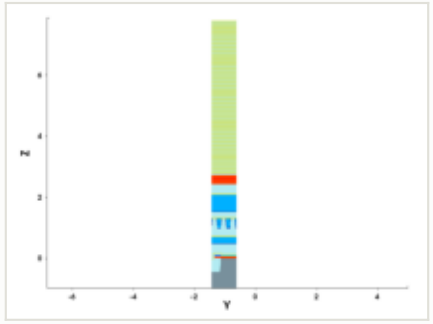


y cut at -1.035 µm

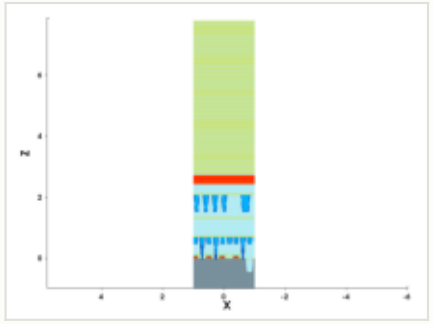


mask for this step

no mask for this step


steps by process area

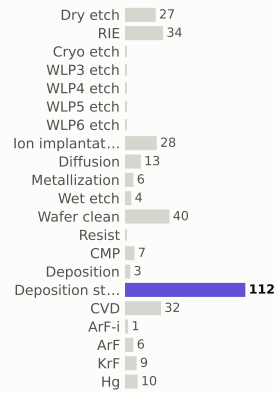

materials deposited (g)

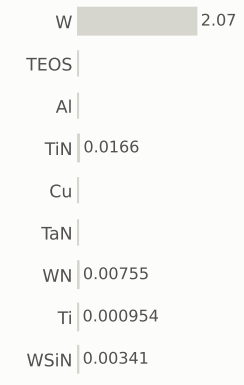

gases emitted (g)




Step #4550: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	327.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

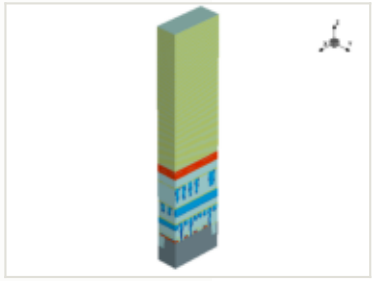




x cut at 0.000 µm

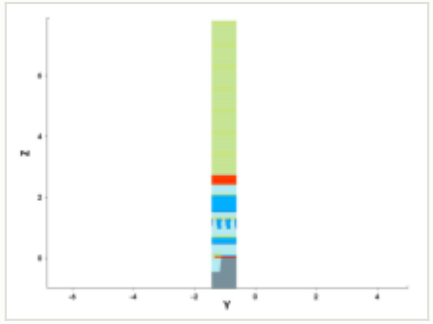

y cut at -1.035 µm

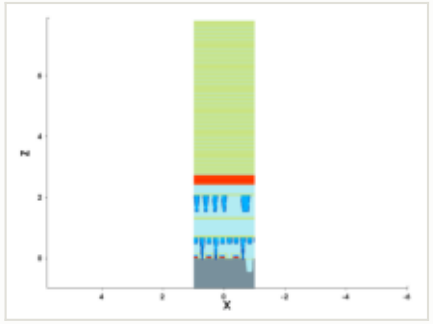


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

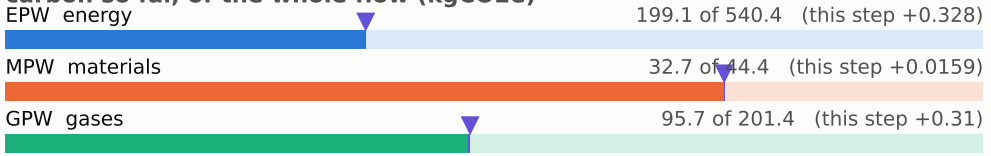

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

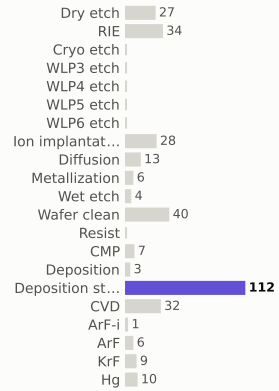

materials deposited (g)



gases emitted (g)

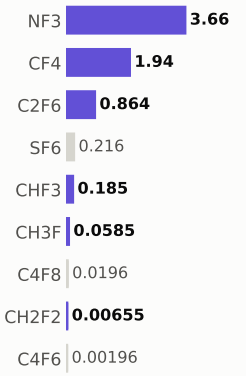


Step #4560: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	328.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

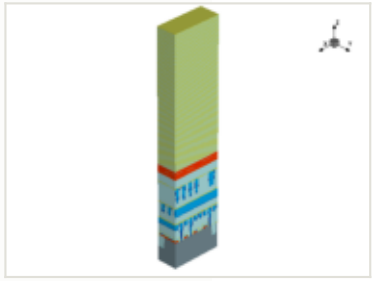


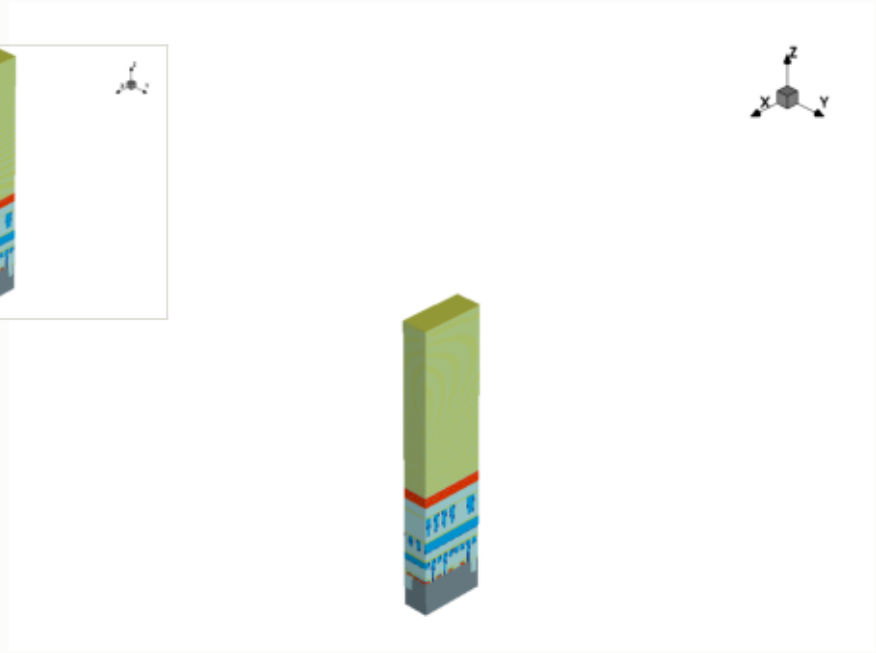


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

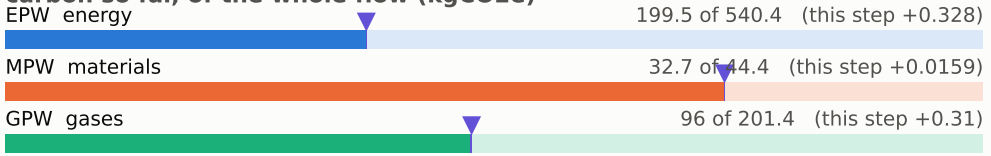


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

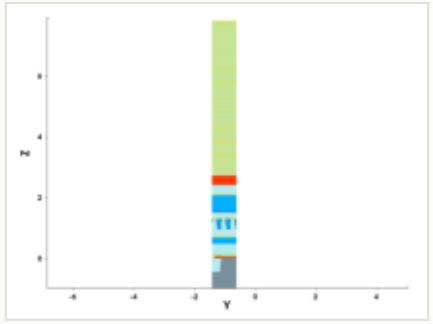


y cut at -1.035 µm

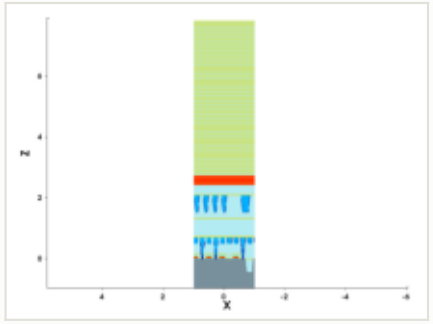


mask for this step

no mask for this step


steps by process area

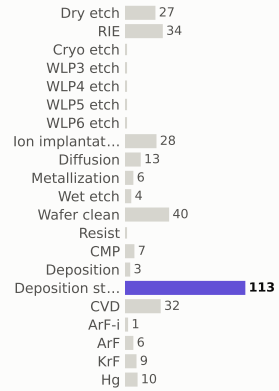

materials deposited (g)

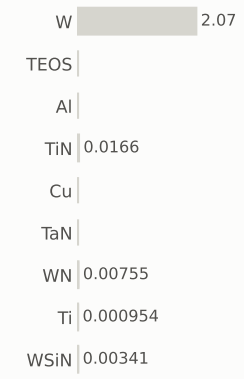

gases emitted (g)




Step #4570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	328.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

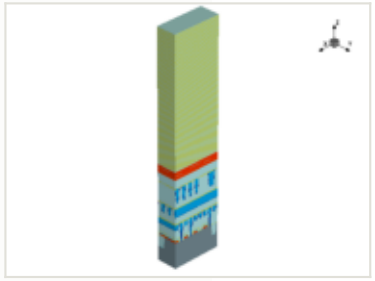





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

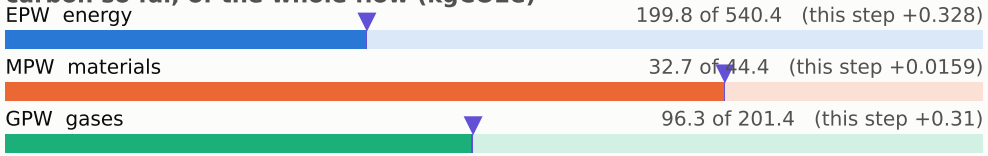


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

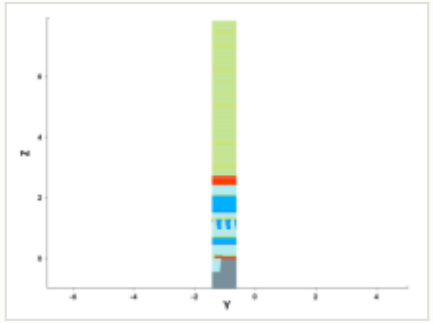


y cut at -1.035 µm

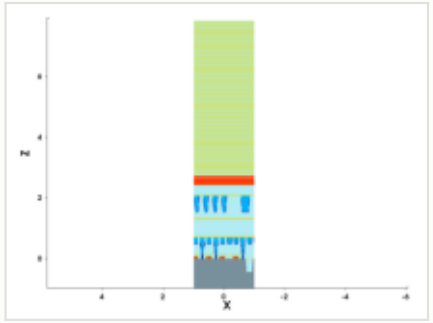

mask for this step

no mask for this step


steps by process area

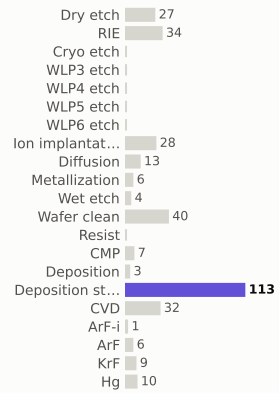

materials deposited (g)



gases emitted (g)

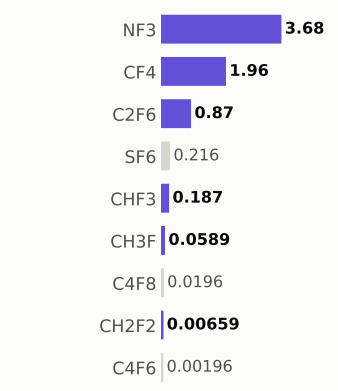


Step #4580: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	329.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

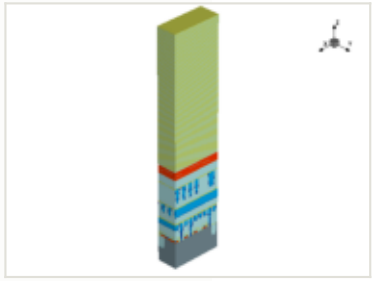


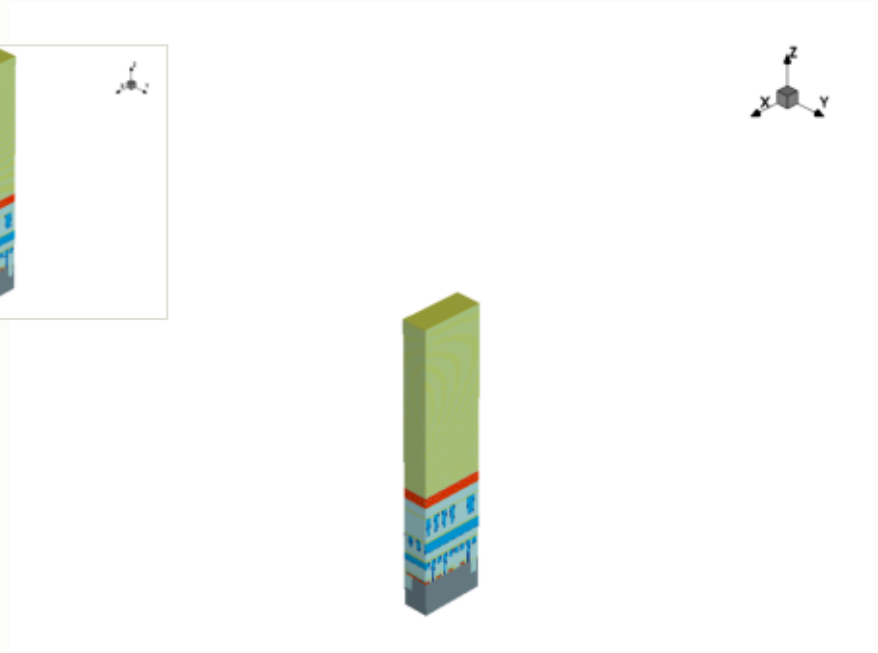


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

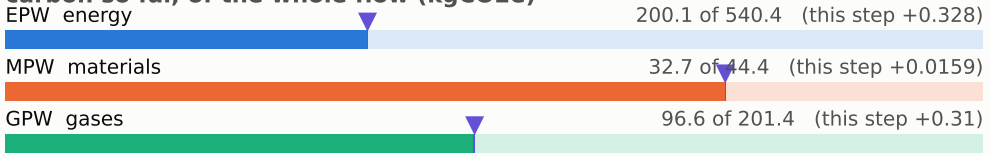


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

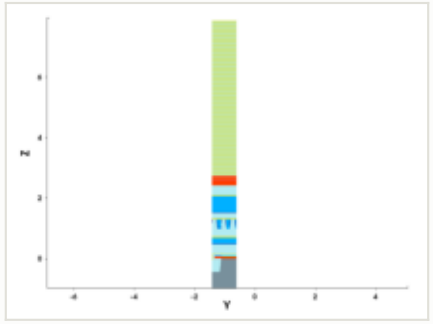


y cut at -1.035 µm

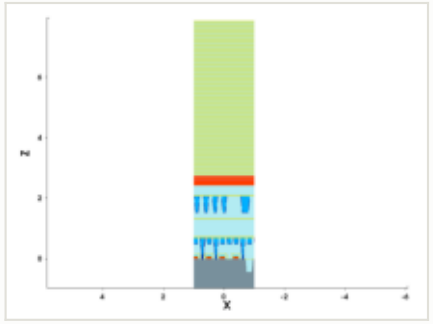

mask for this step

no mask for this step


steps by process area

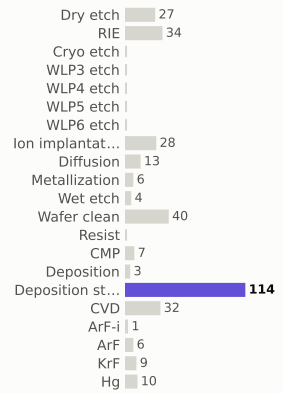

materials deposited (g)



gases emitted (g)

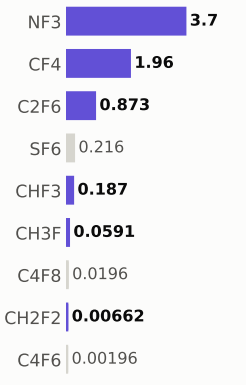


Step #4590: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	330.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

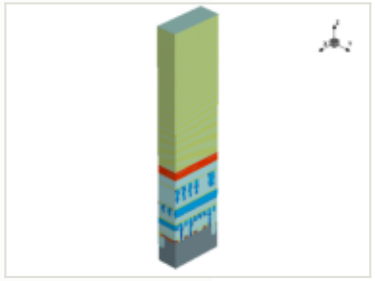





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

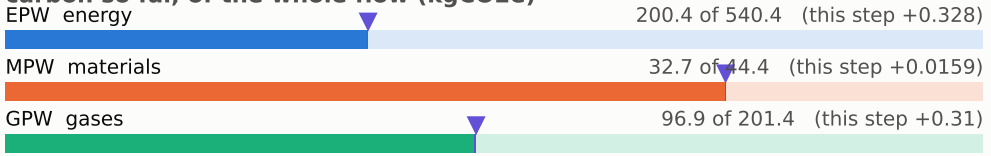


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

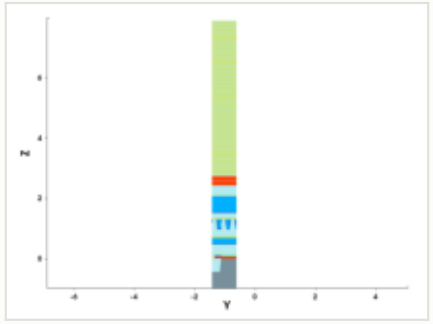


y cut at -1.035 µm

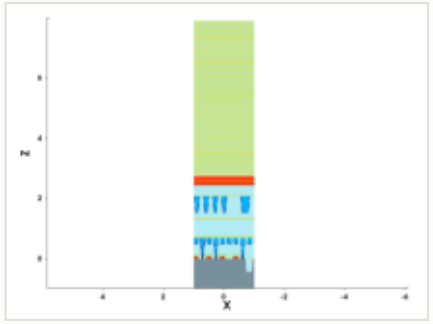

mask for this step

no mask for this step


steps by process area

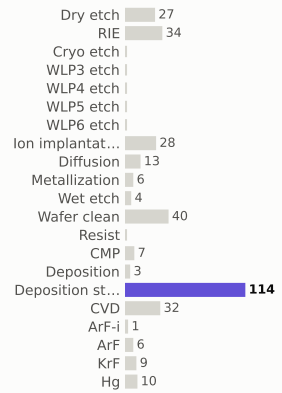

materials deposited (g)



gases emitted (g)

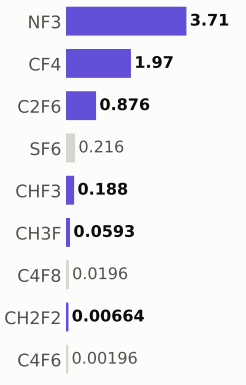

Step #4600: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	330.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




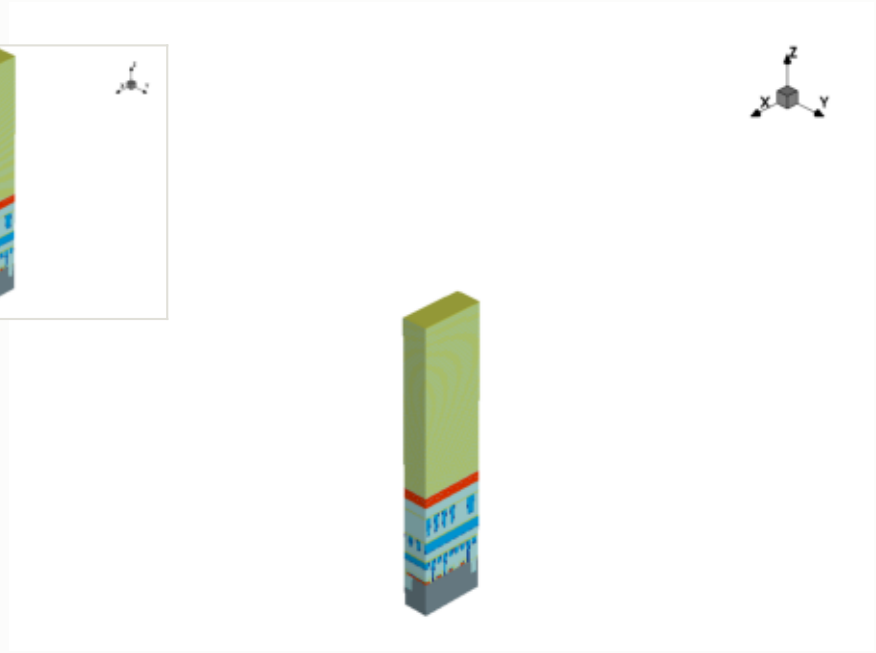


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

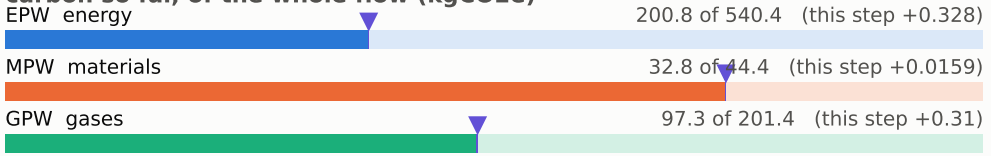


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

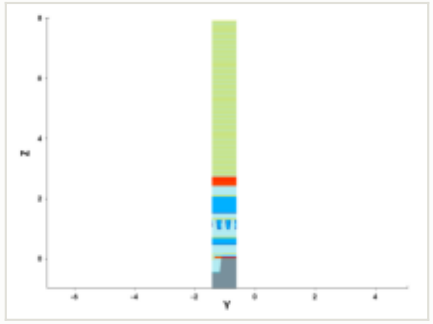


y cut at -1.035 µm

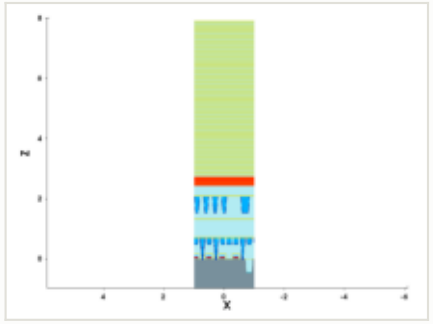


mask for this step

no mask for this step


steps by process area

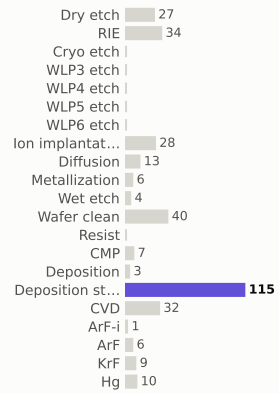

materials deposited (g)

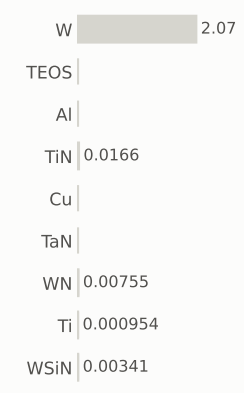

gases emitted (g)

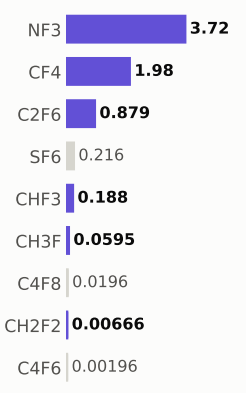


Step #4610: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	331.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

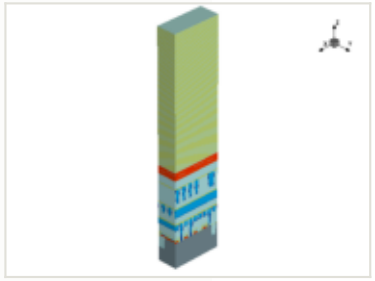


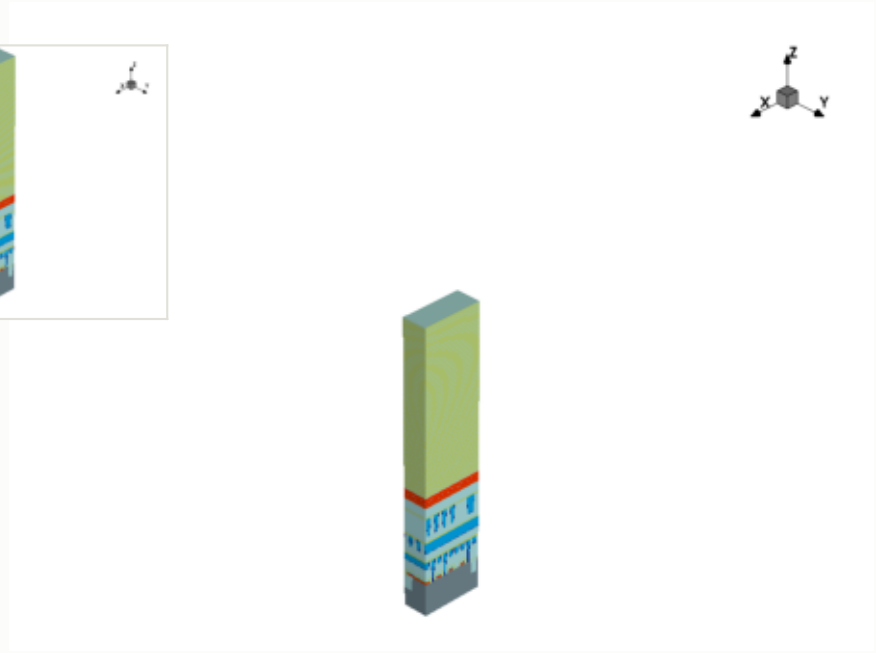


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

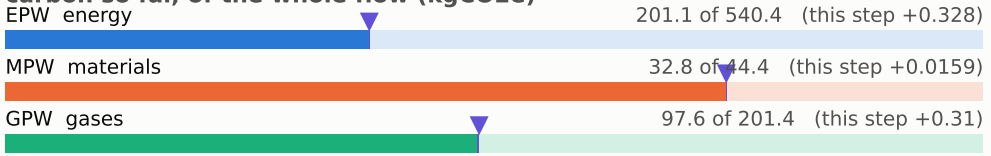


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

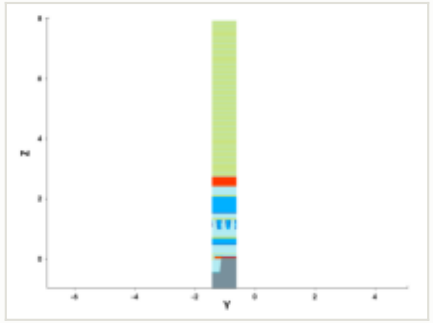


y cut at -1.035 µm

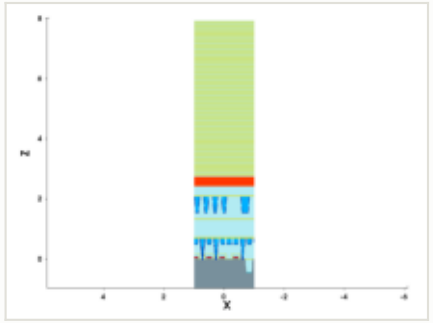

mask for this step

no mask for this step


steps by process area

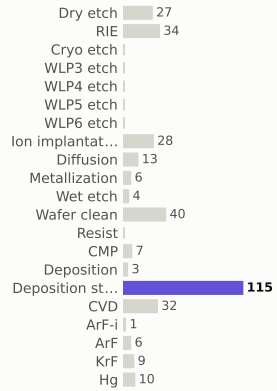

materials deposited (g)



gases emitted (g)

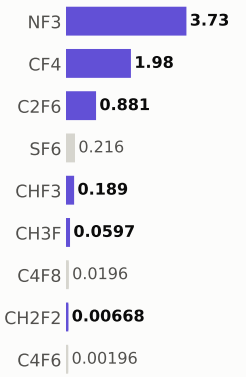


Step #4620: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	332.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

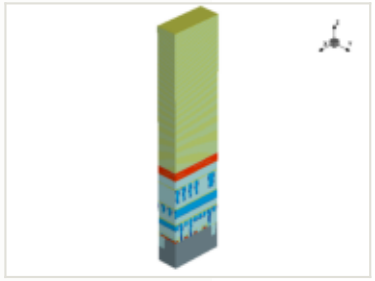





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

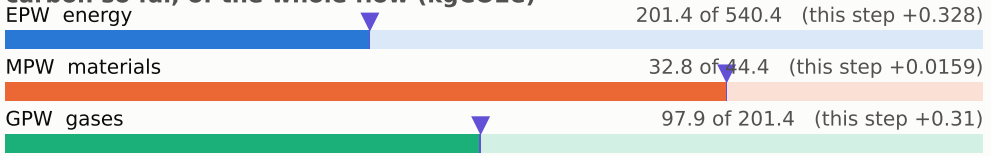


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

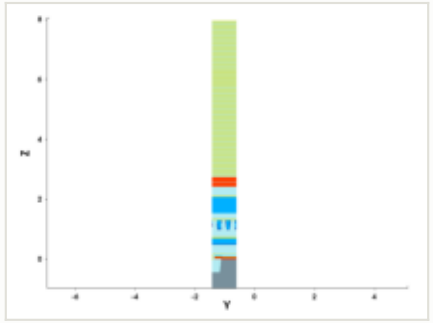


y cut at -1.035 µm

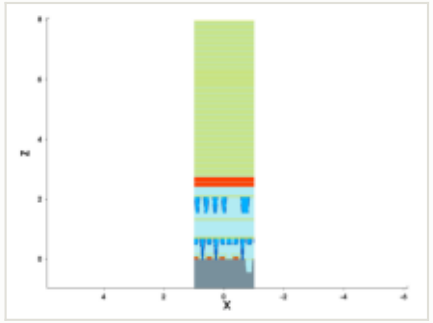

mask for this step

no mask for this step


steps by process area

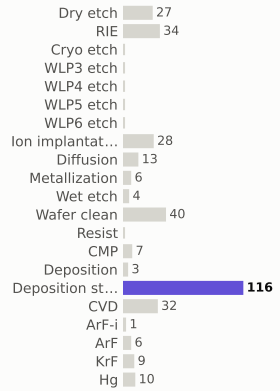

materials deposited (g)



gases emitted (g)



Step #4630: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	332.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




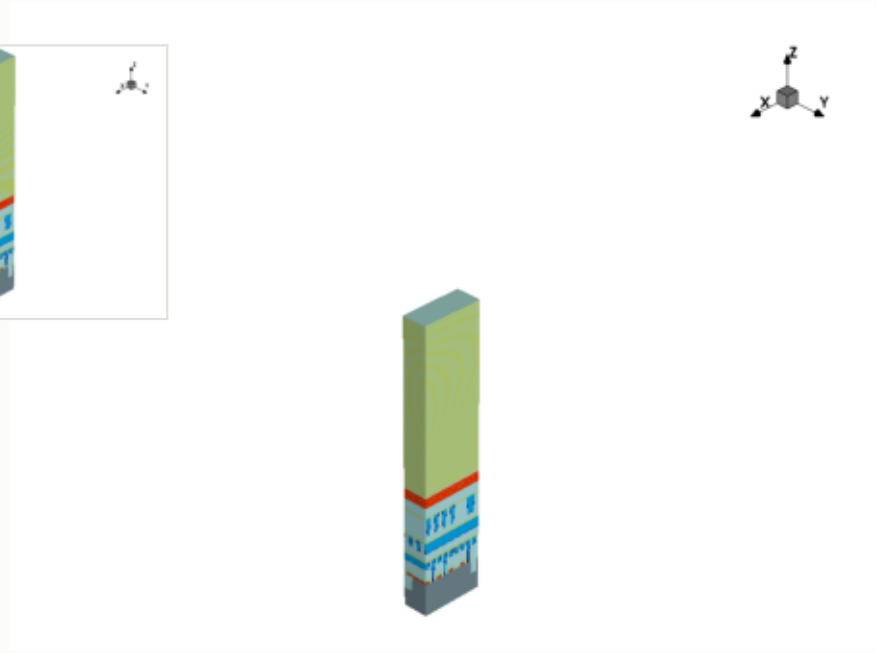


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

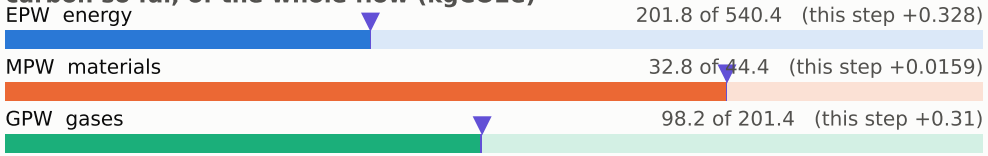


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

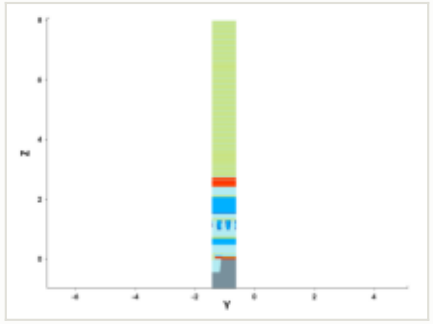


y cut at -1.035 µm

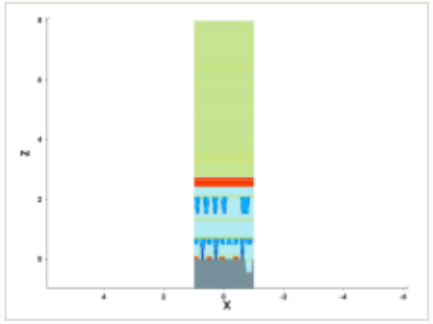

mask for this step

no mask for this step


steps by process area

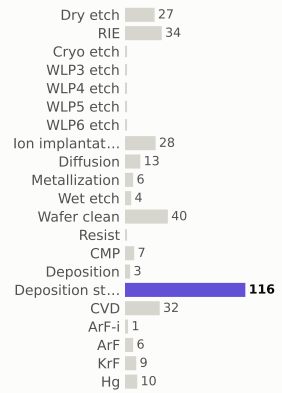

materials deposited (g)



gases emitted (g)

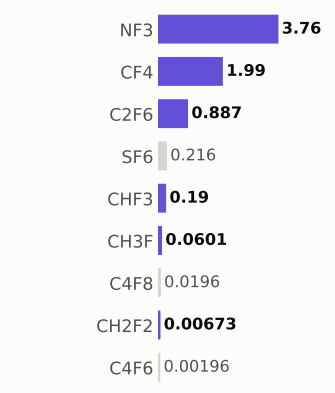


Step #4640: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	333.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

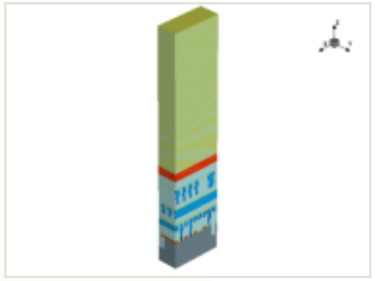


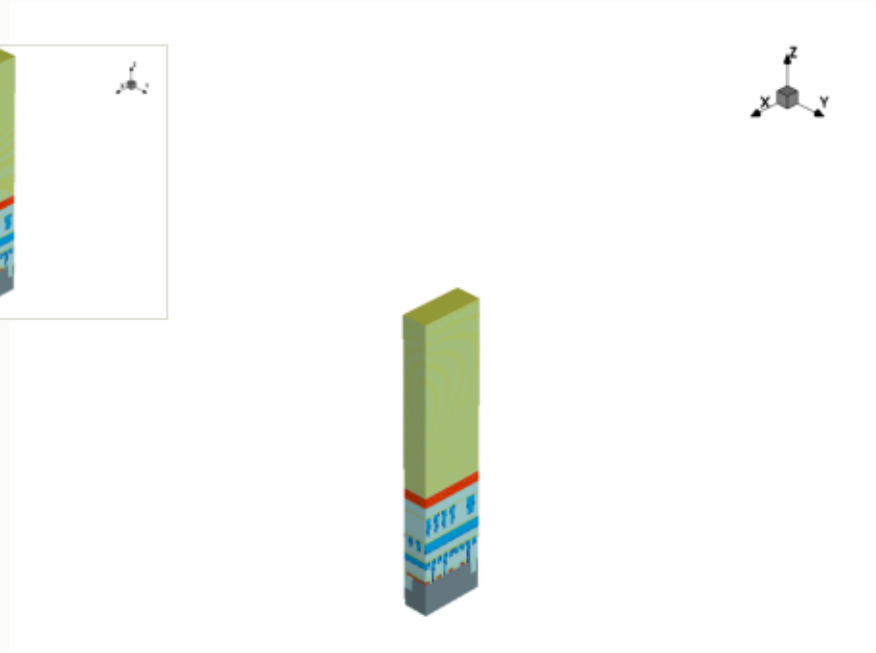


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

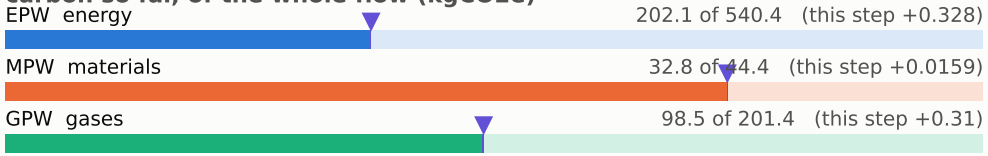


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

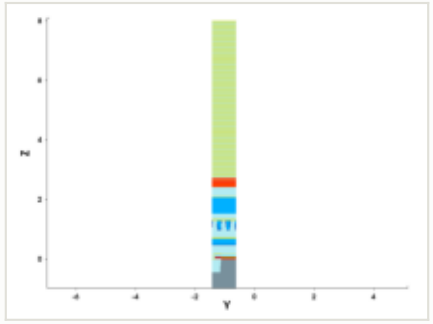


y cut at -1.035 µm

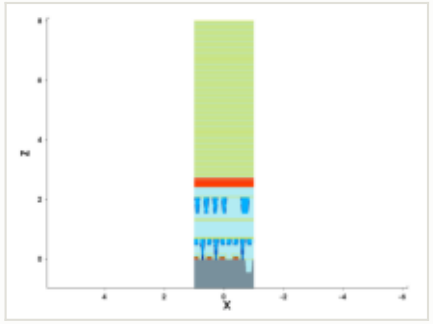


mask for this step

no mask for this step


steps by process area

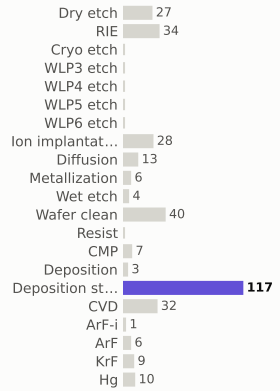

materials deposited (g)

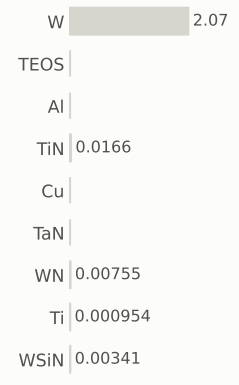

gases emitted (g)



Step #4650: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	334.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




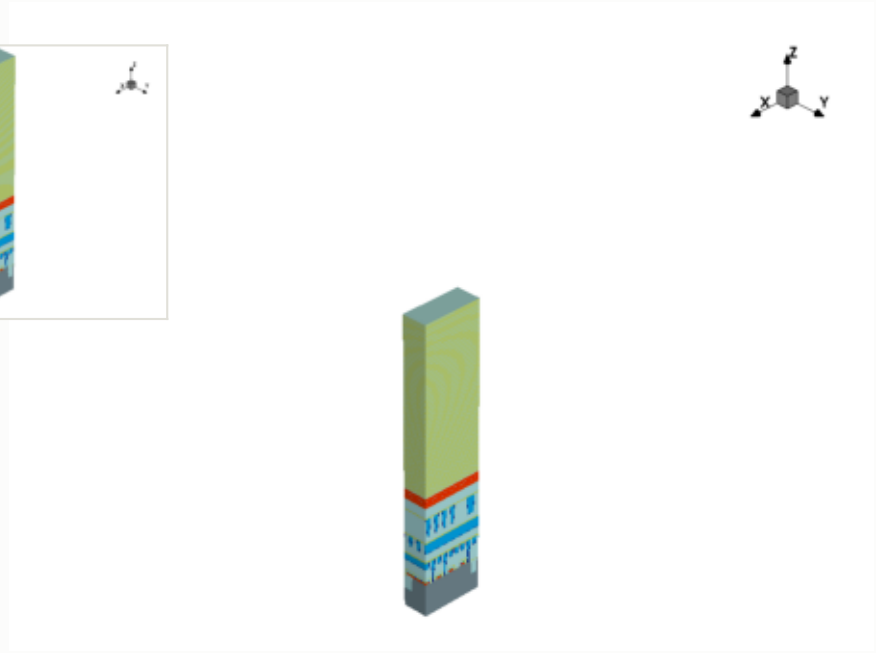


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

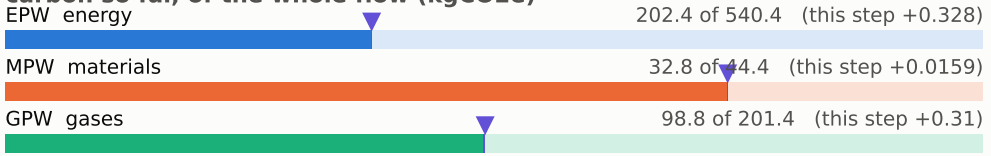


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

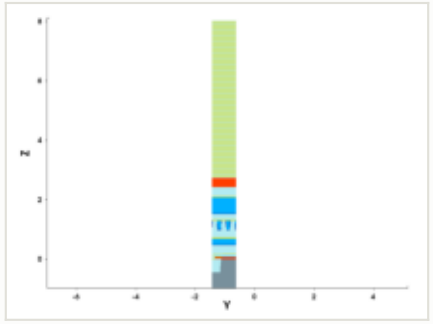


y cut at -1.035 µm

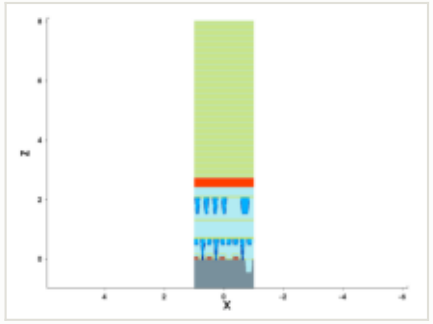

mask for this step

no mask for this step


steps by process area

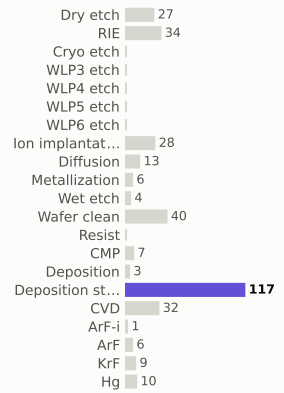

materials deposited (g)



gases emitted (g)

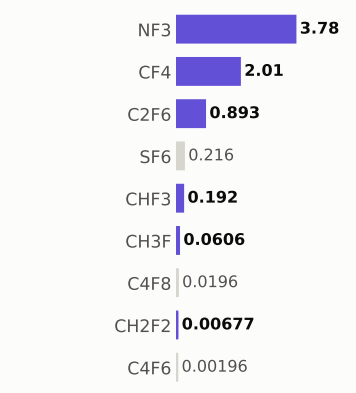


Step #4660: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	334.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

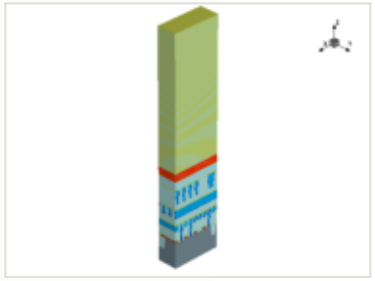


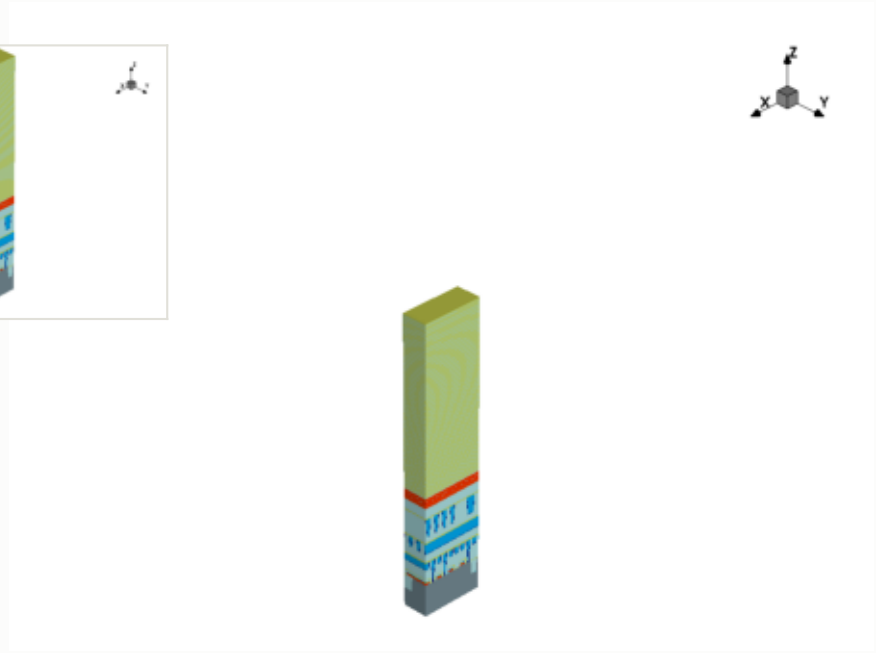


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

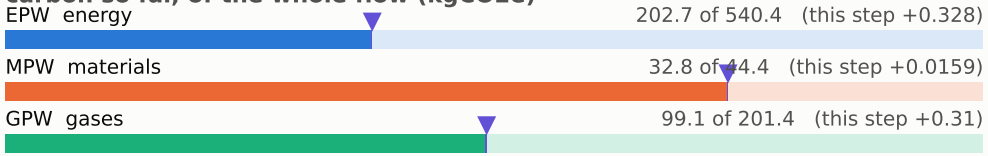


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

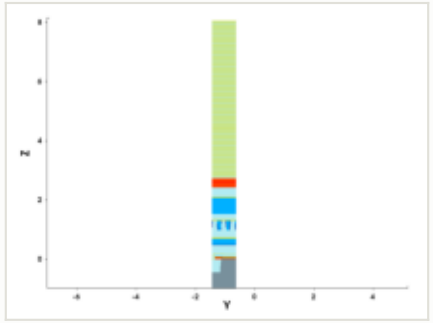


y cut at -1.035 µm

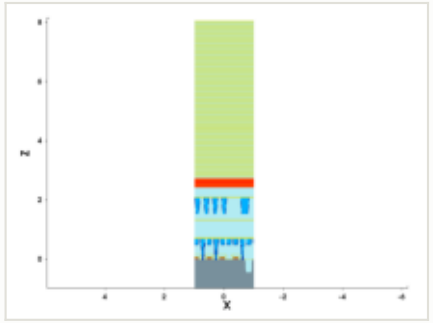

mask for this step

no mask for this step


steps by process area

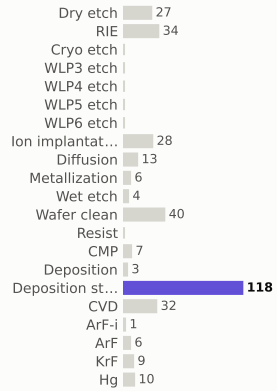

materials deposited (g)



gases emitted (g)



Step #4670: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	335.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




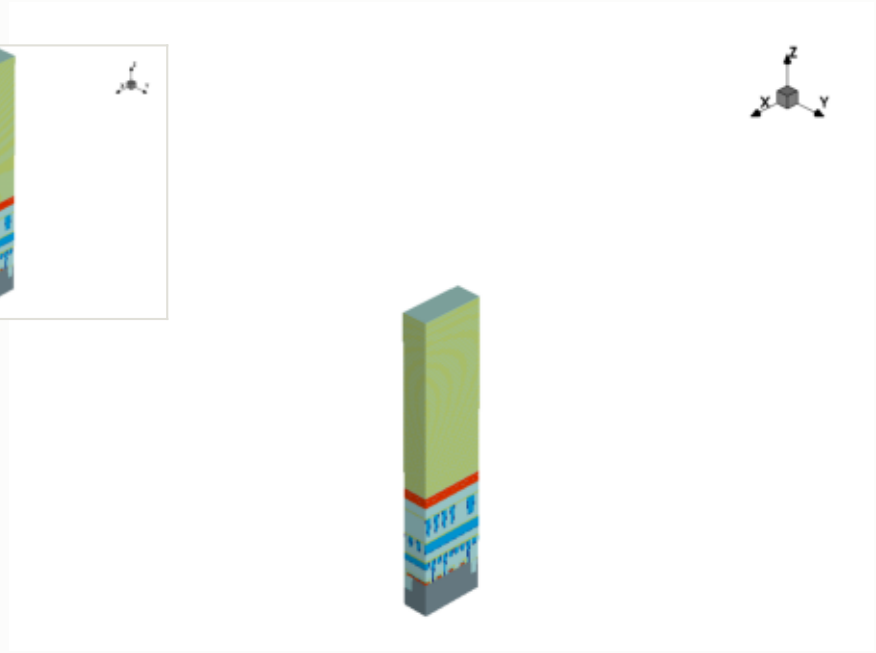


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

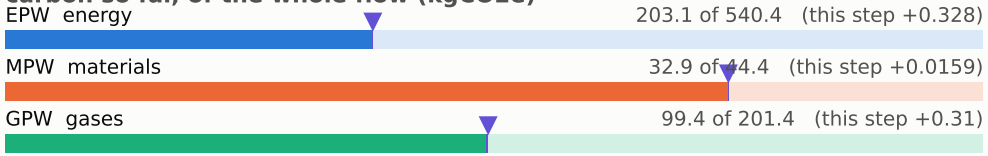


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

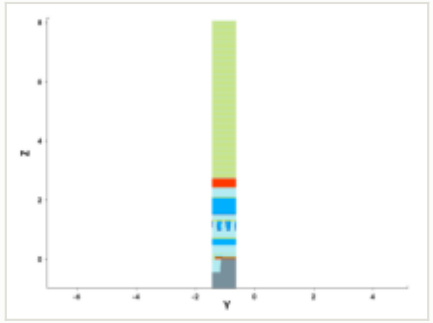


y cut at -1.035 µm

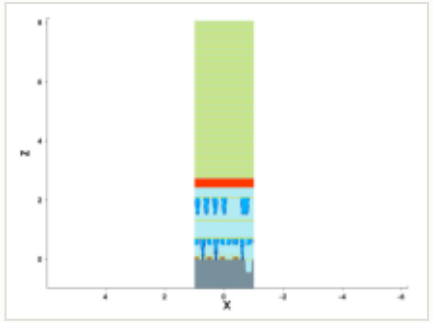

mask for this step

no mask for this step


steps by process area

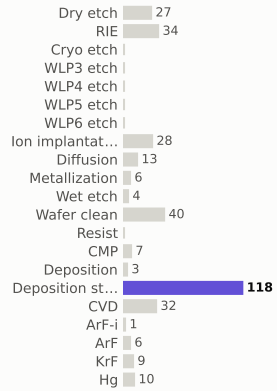

materials deposited (g)



gases emitted (g)

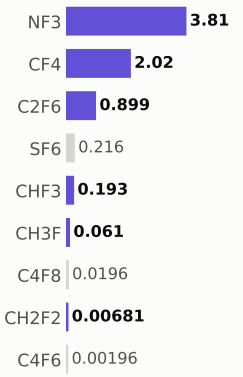

Step #4680: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	336.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




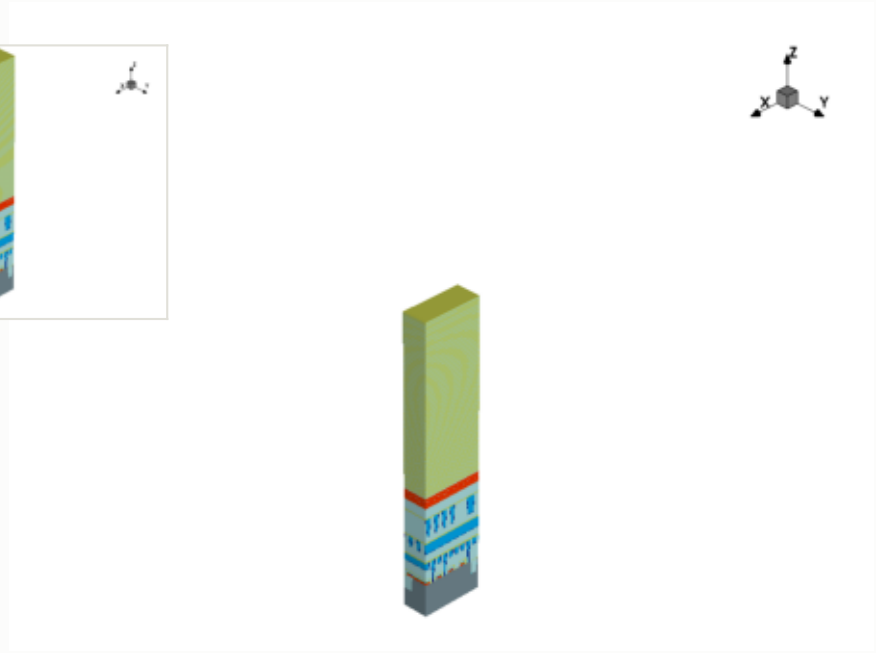

x cut at 0.000 µm

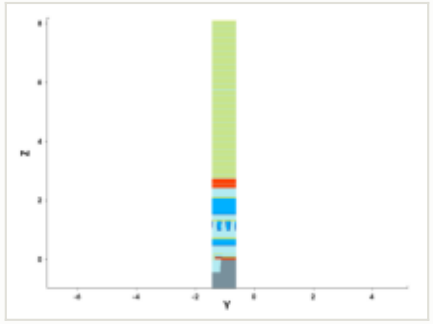

y cut at -1.035 µm

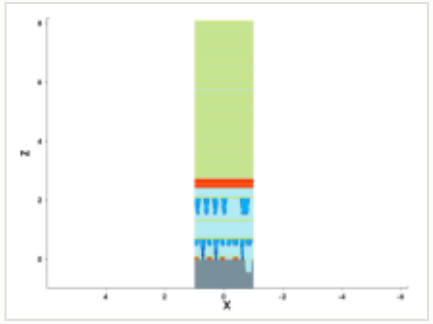


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

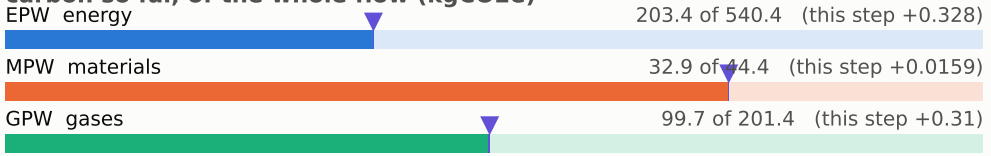

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

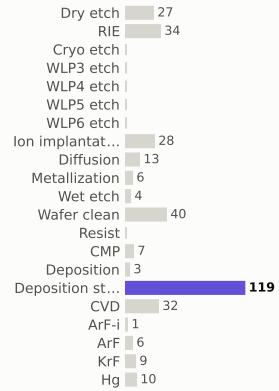

materials deposited (g)



gases emitted (g)

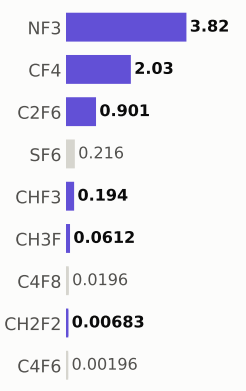

Step #4690: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	336.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




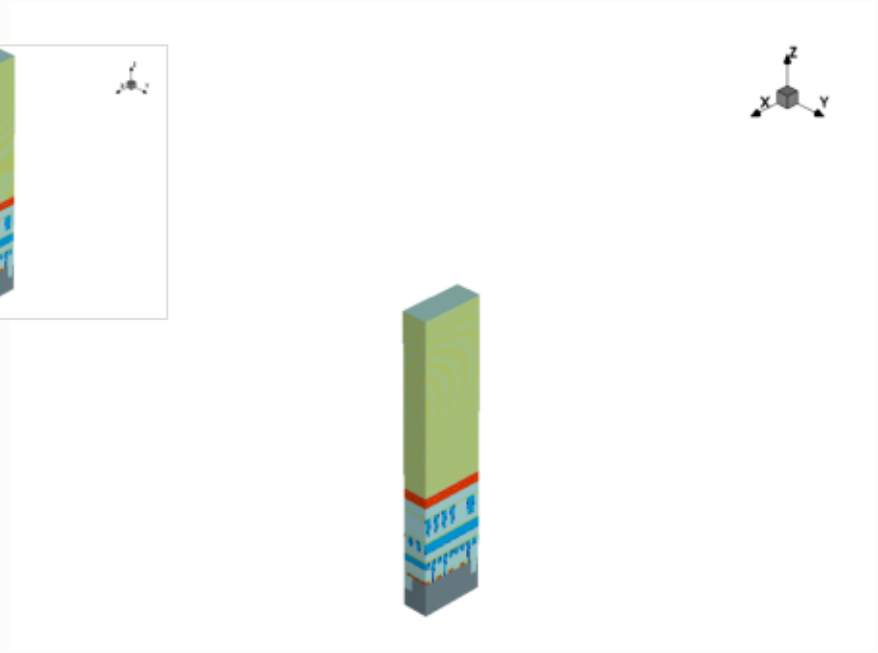


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

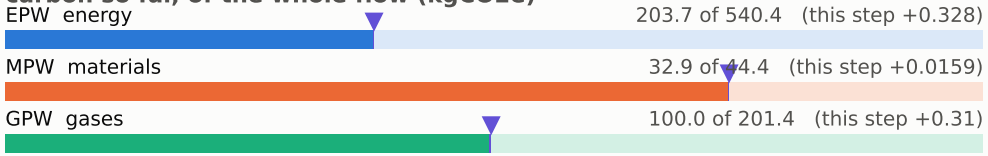


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

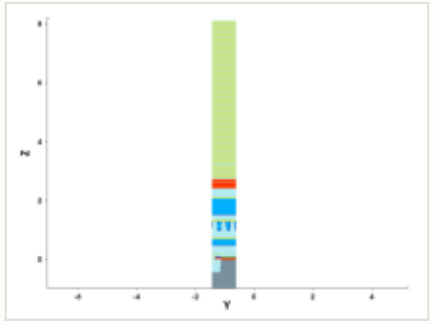


y cut at -1.035 µm

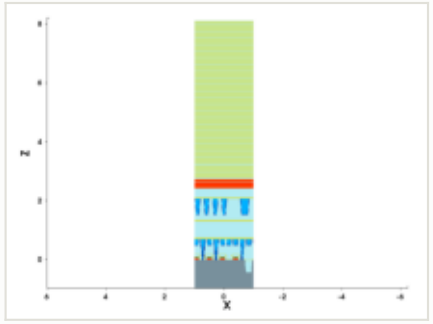


mask for this step

no mask for this step


steps by process area

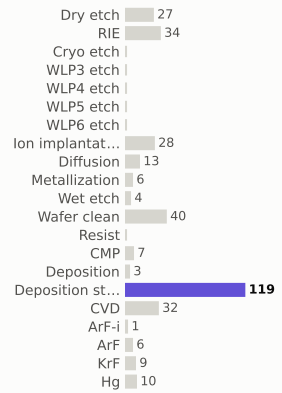

materials deposited (g)



gases emitted (g)

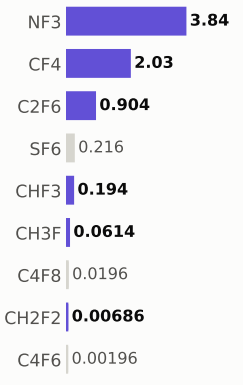


Step #4700: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	337.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

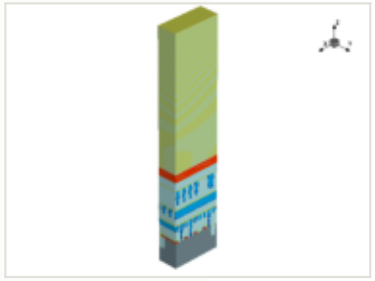


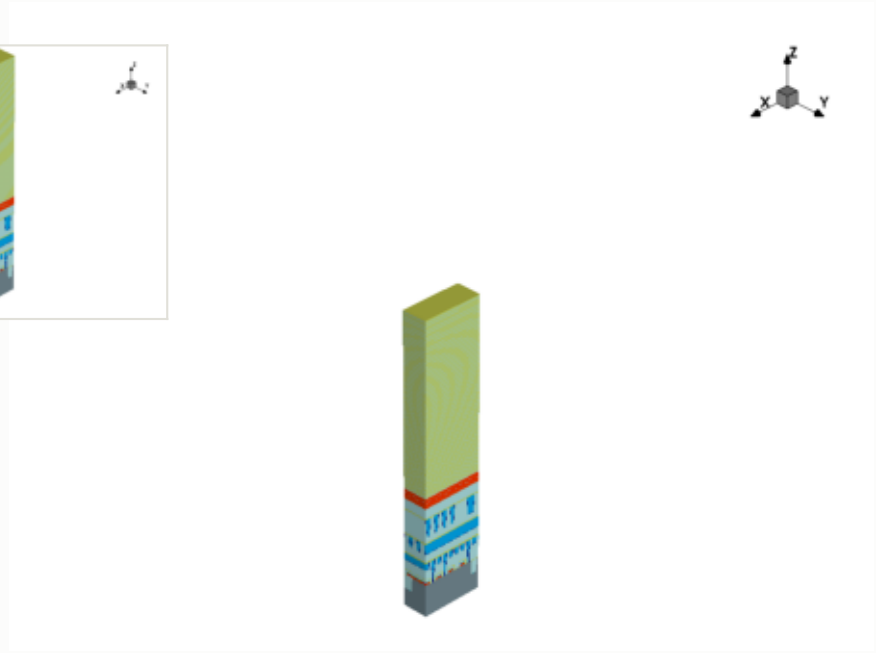


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

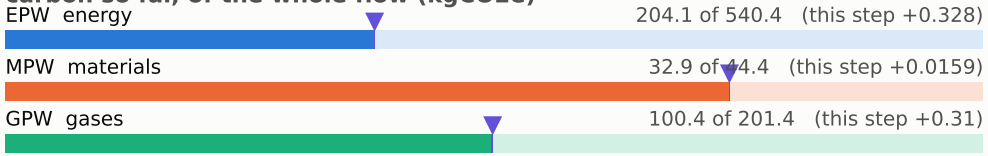


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

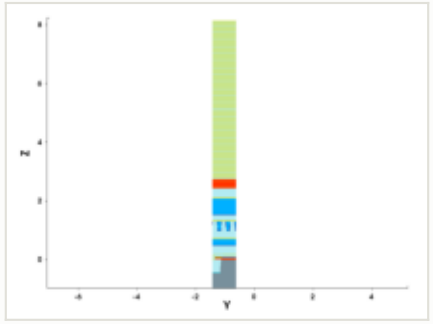


y cut at -1.035 µm

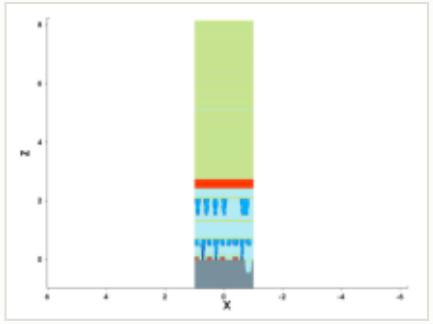


mask for this step

no mask for this step


steps by process area

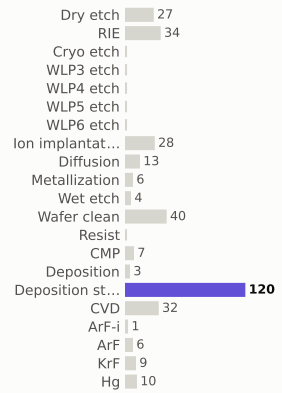

materials deposited (g)

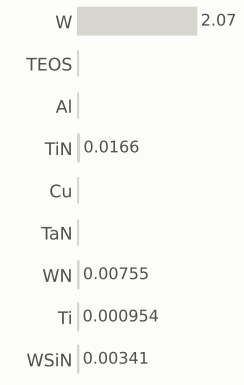

gases emitted (g)



Step #4710: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	338.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




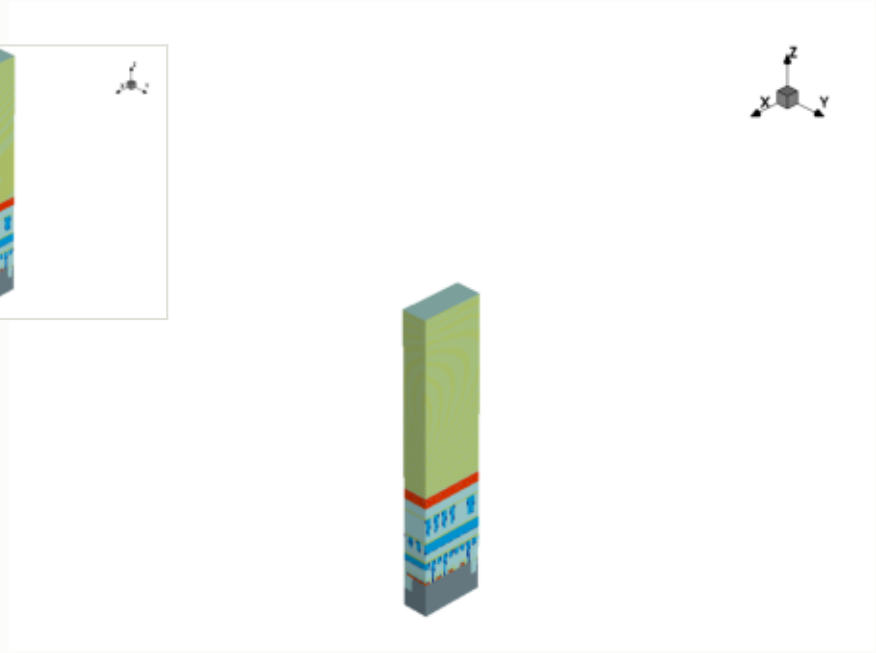


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

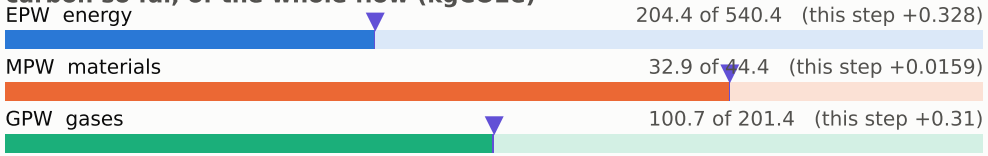


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

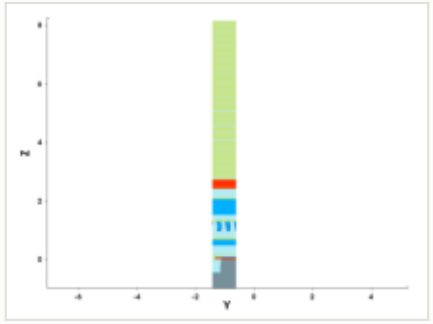


y cut at -1.035 µm

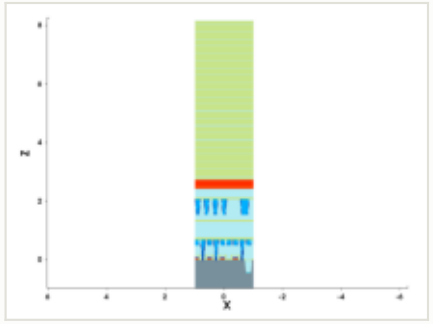


mask for this step

no mask for this step


steps by process area

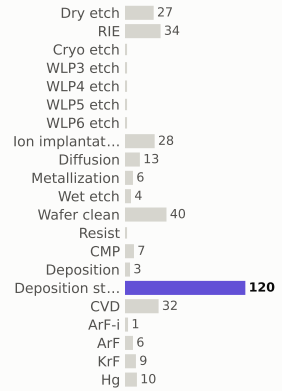

materials deposited (g)

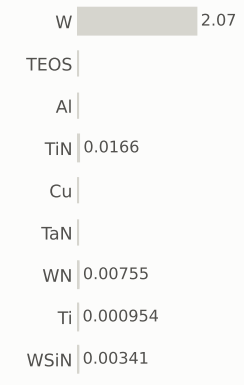

gases emitted (g)




Step #4720: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	338.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

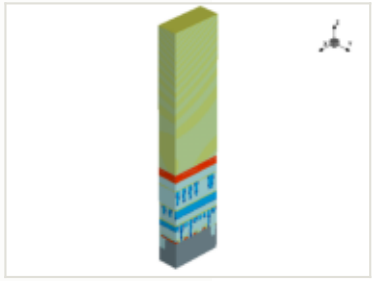


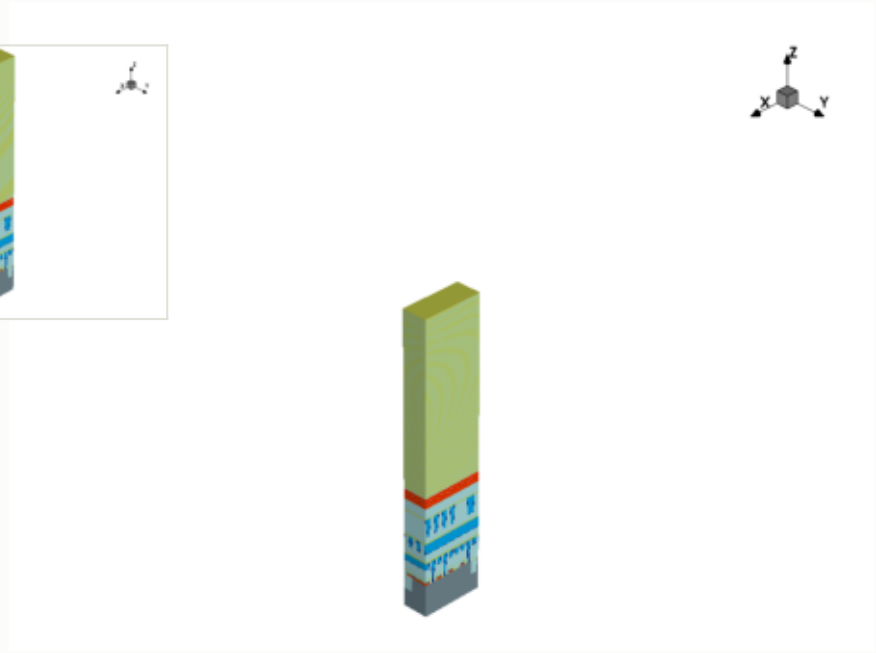


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

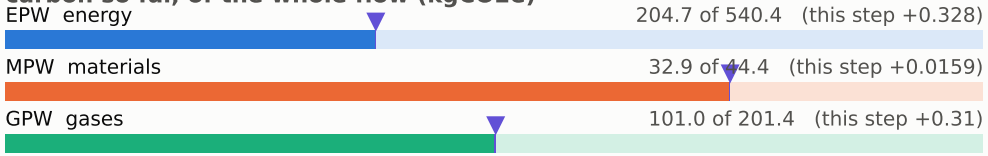


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

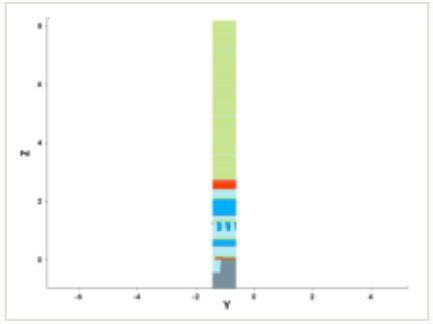


y cut at -1.035 µm

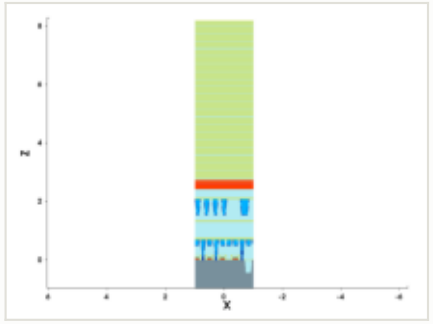


mask for this step

no mask for this step


steps by process area

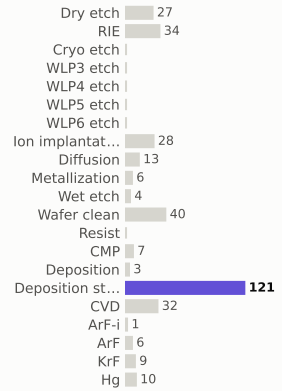

materials deposited (g)



gases emitted (g)

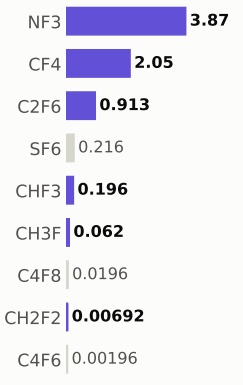

Step #4730: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	339.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




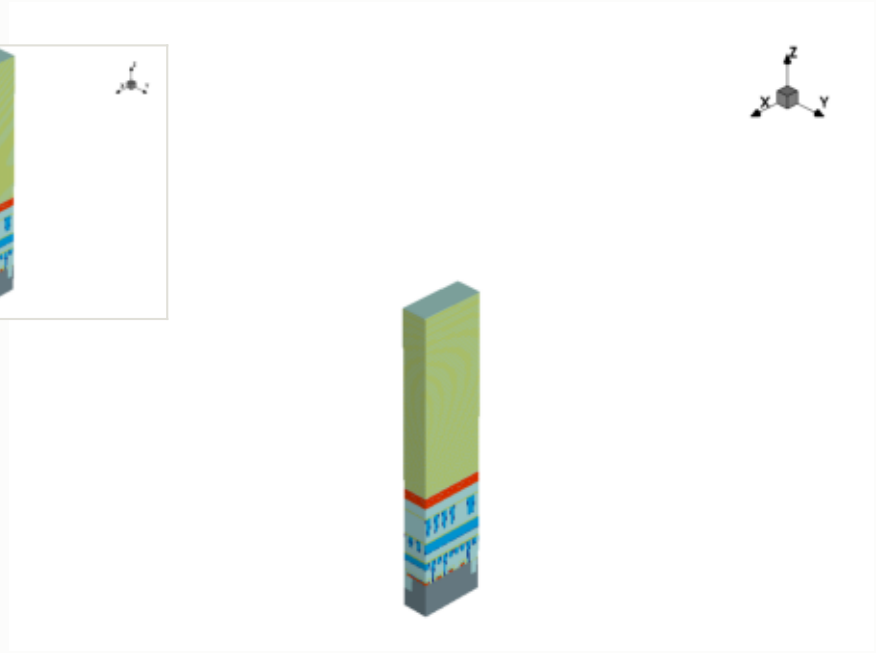


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

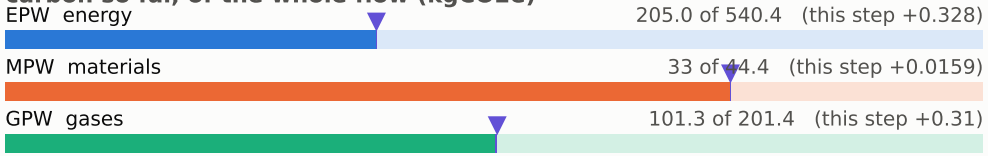


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

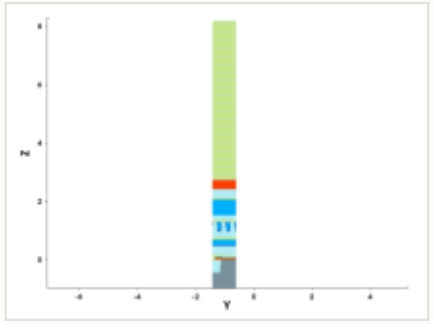


y cut at -1.035 µm

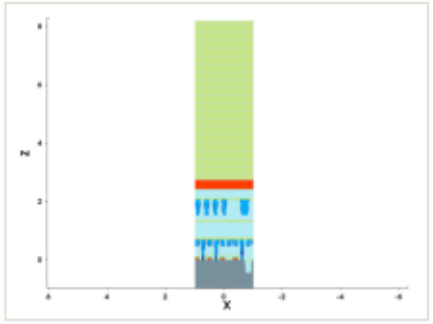


mask for this step

no mask for this step


steps by process area

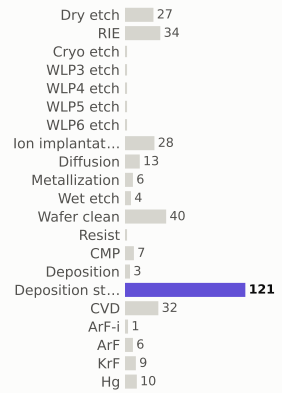

materials deposited (g)



gases emitted (g)

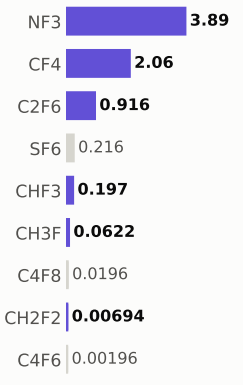


Step #4740: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	339.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

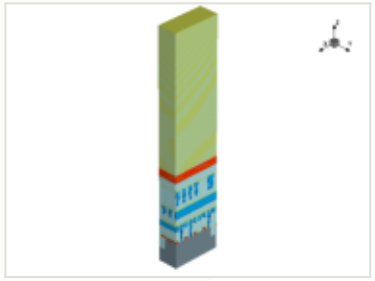




x cut at 0.000 µm

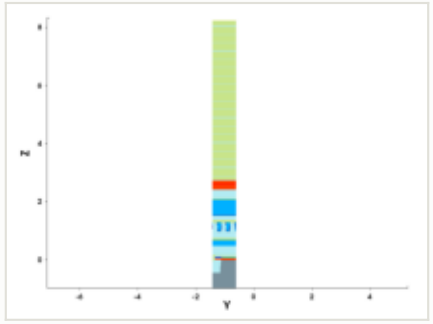

y cut at -1.035 µm

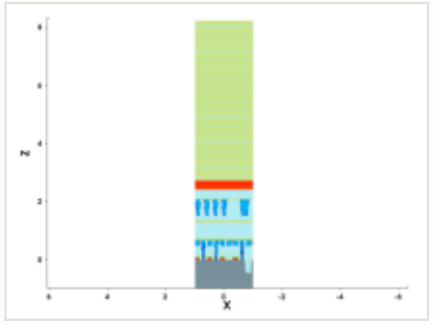


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

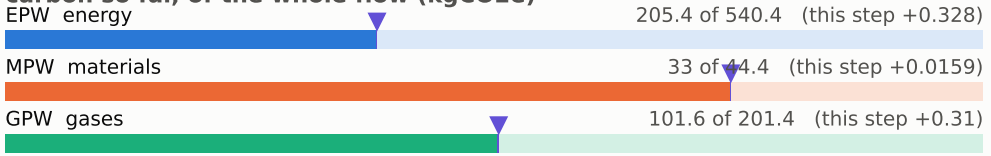

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

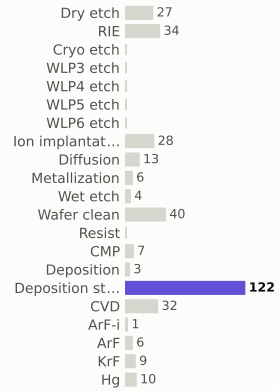

materials deposited (g)



gases emitted (g)



Step #4750: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	340.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




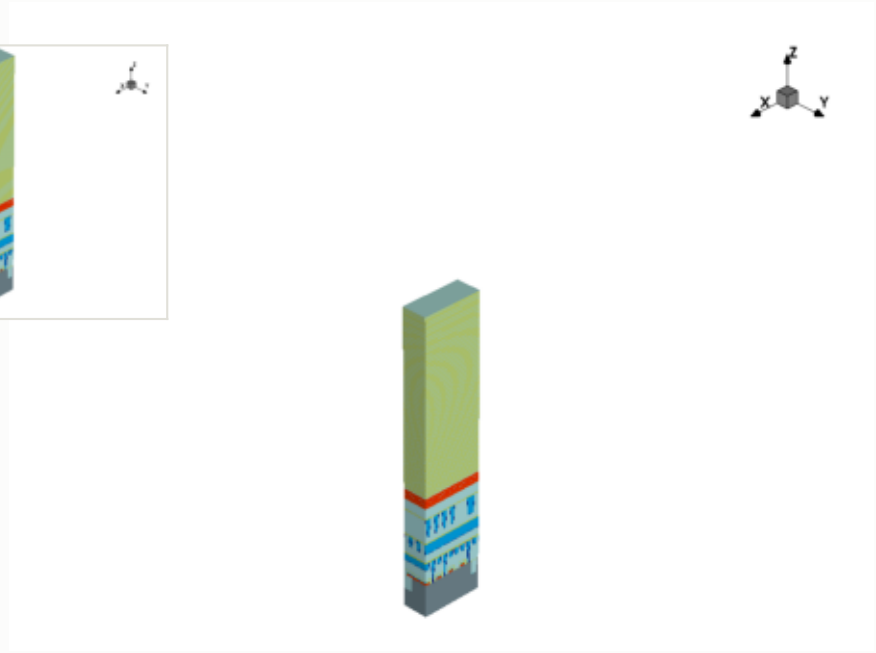

x cut at 0.000 µm

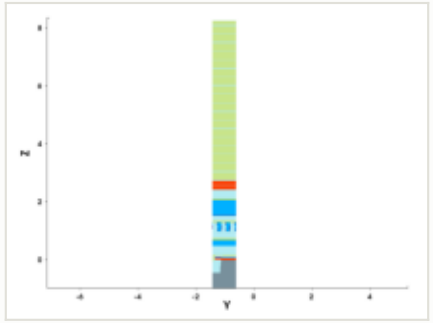

y cut at -1.035 µm

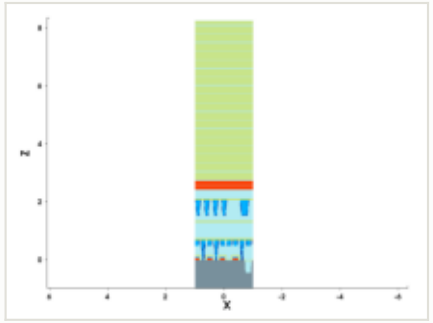


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

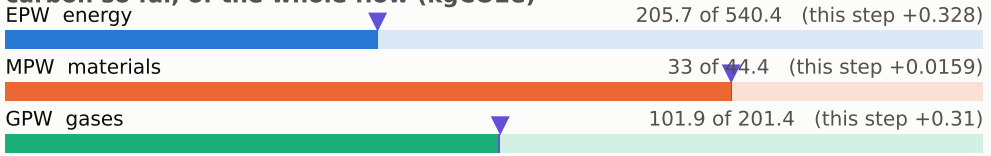


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

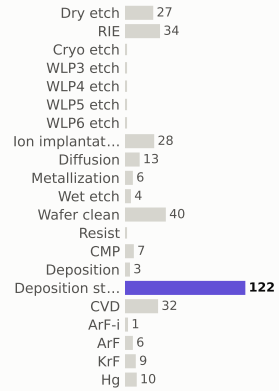

materials deposited (g)

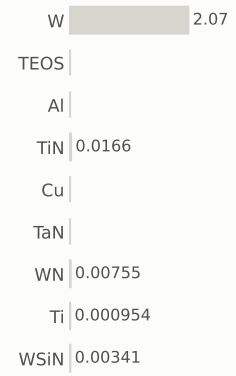

gases emitted (g)

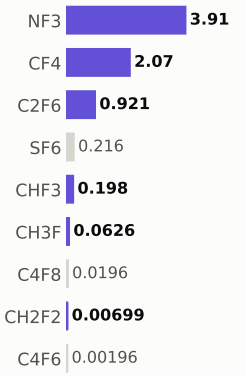


Step #4760: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	341.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

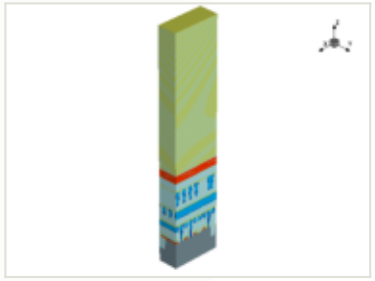


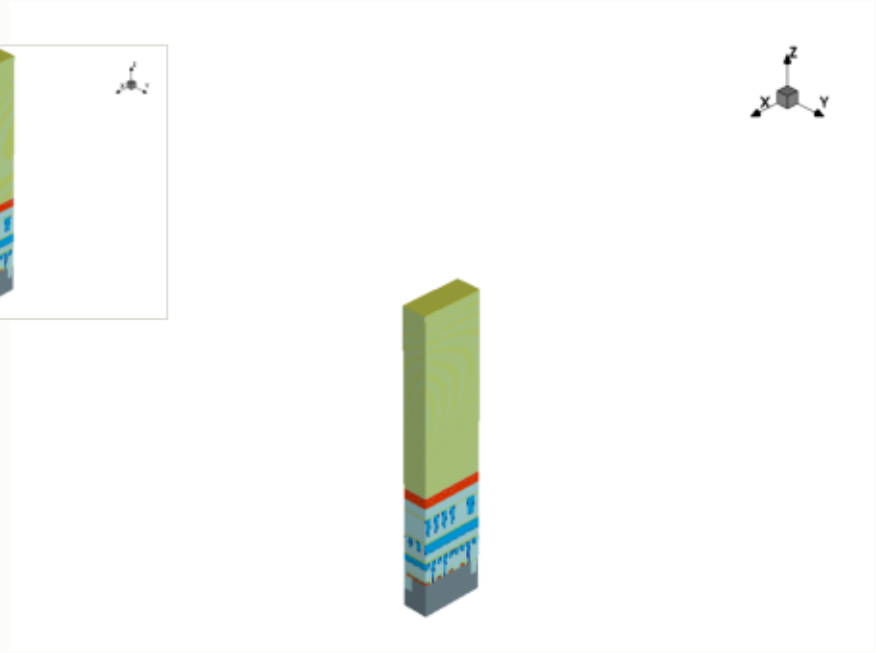

x cut at 0.000 µm

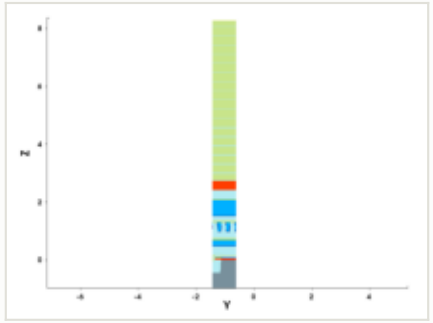

y cut at -1.035 µm

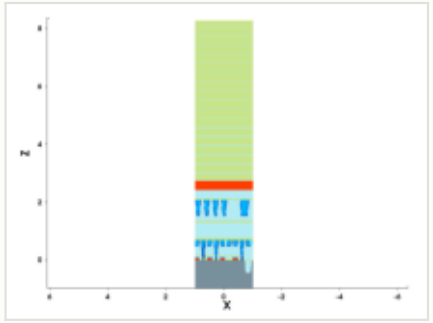


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

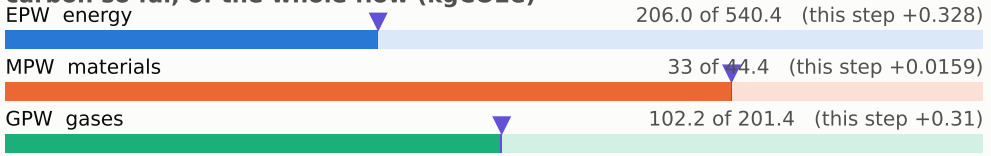


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

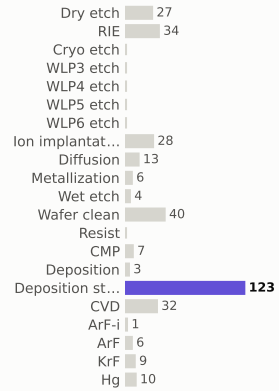

materials deposited (g)

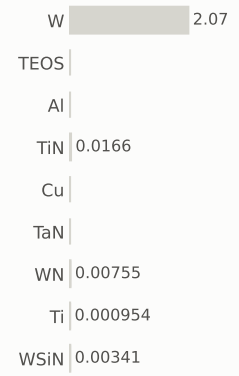

gases emitted (g)

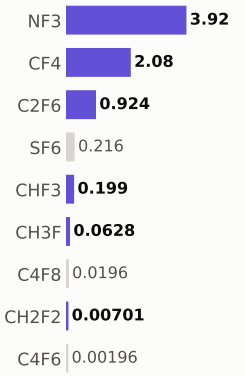

Step #4770: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	341.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




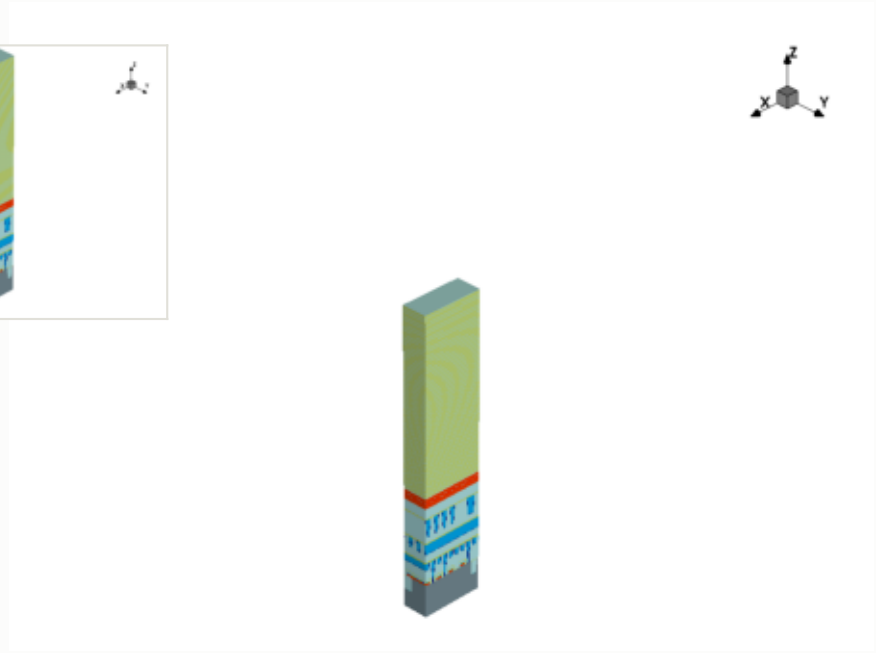

x cut at 0.000 µm

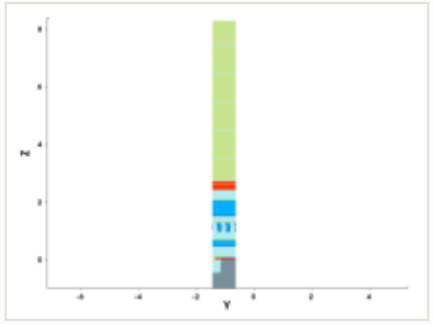

y cut at -1.035 µm

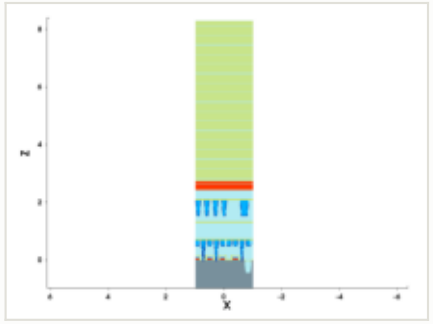


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

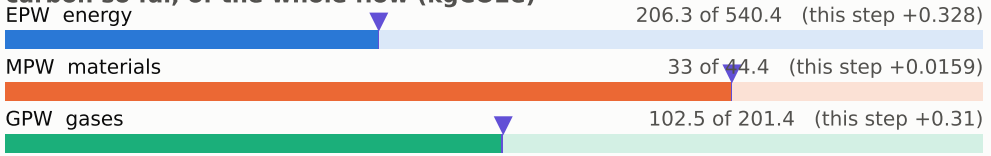


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

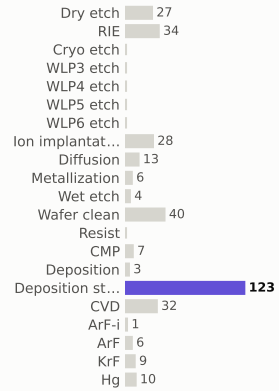

materials deposited (g)

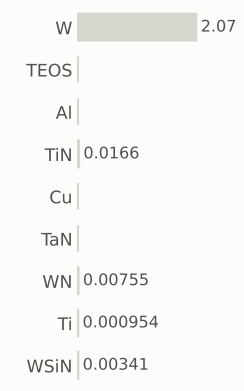

gases emitted (g)

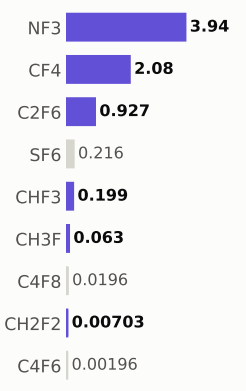

Step #4780: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	342.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




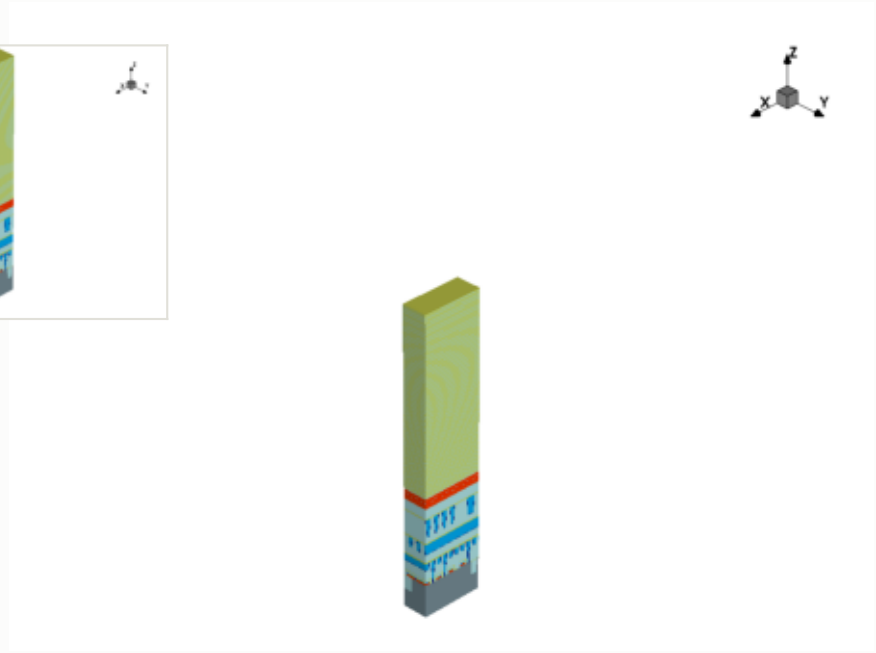

x cut at 0.000 µm

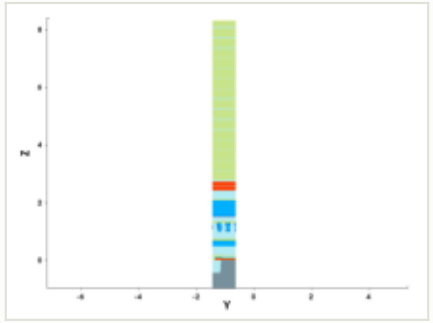

y cut at -1.035 µm

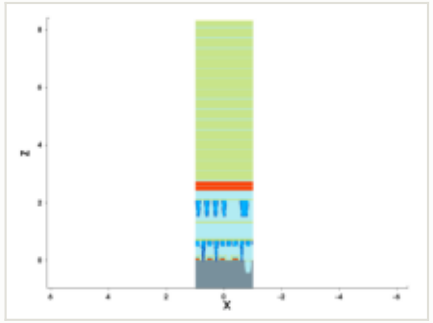


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

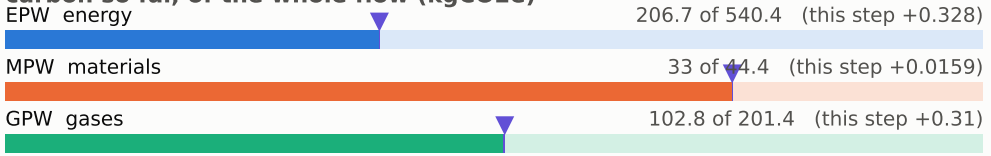


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

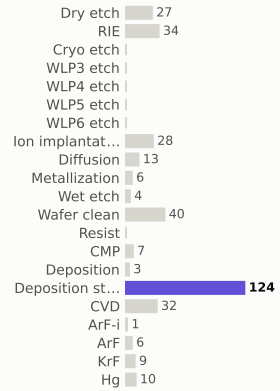

materials deposited (g)

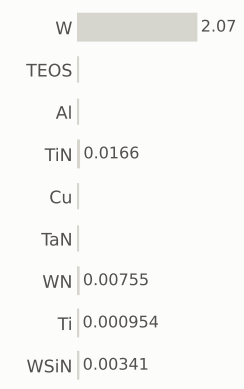

gases emitted (g)

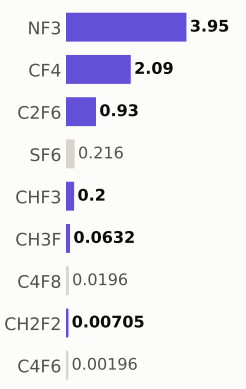

Step #4790: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	343.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




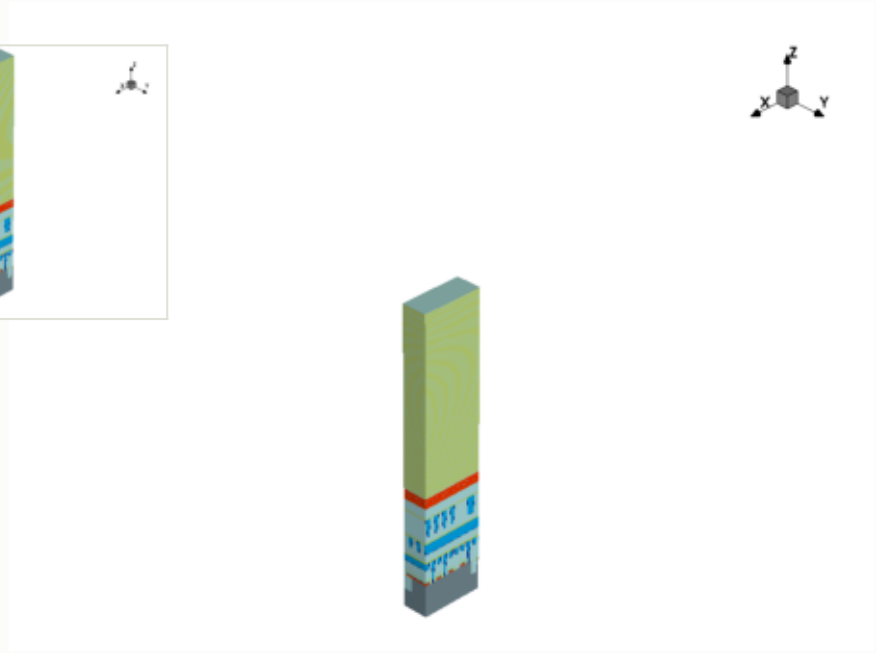

x cut at 0.000 µm

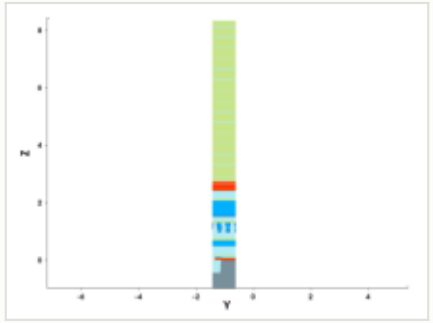

y cut at -1.035 µm

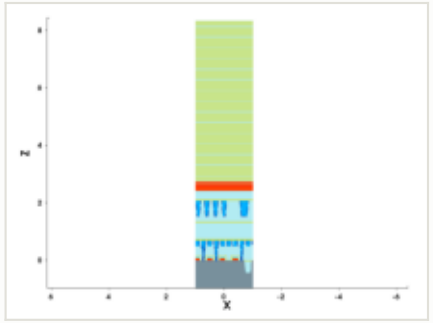


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

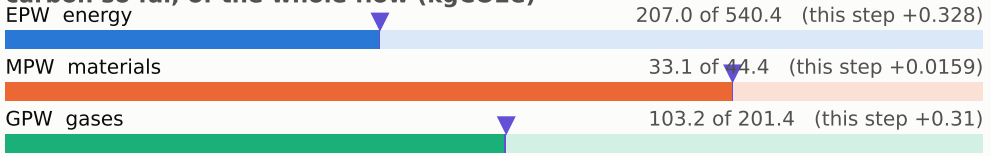


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

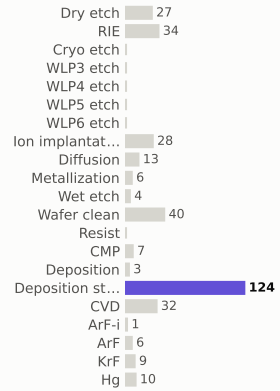

materials deposited (g)

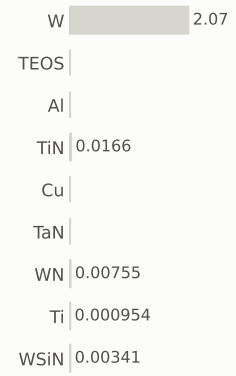

gases emitted (g)

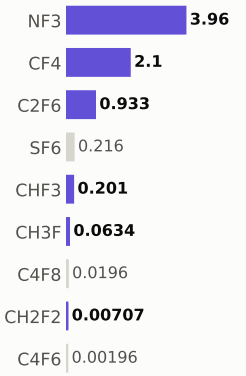

Step #4800: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	343.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




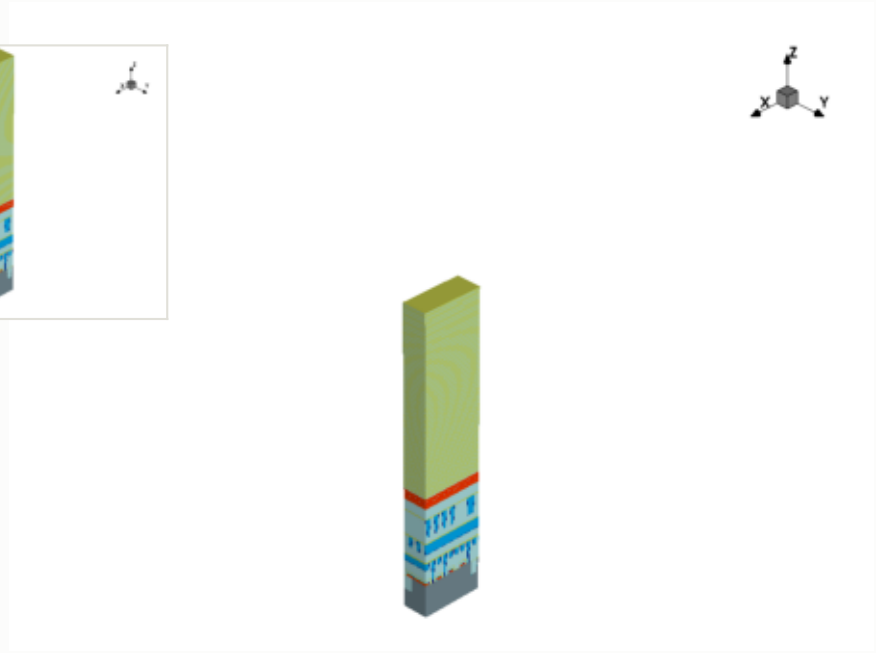


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

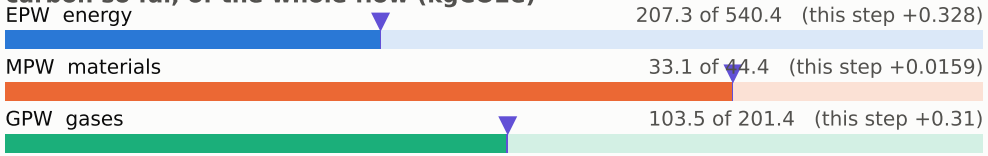


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

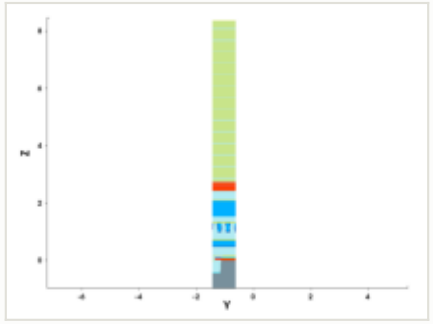


y cut at -1.035 µm

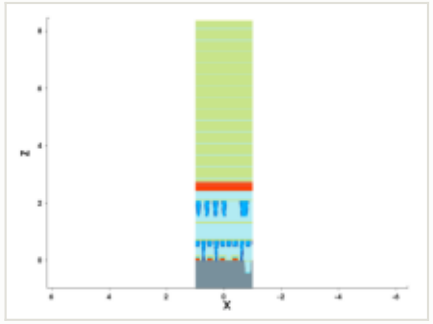


mask for this step

no mask for this step


steps by process area

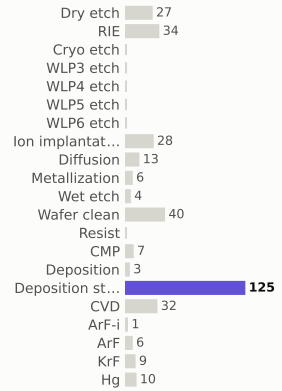

materials deposited (g)

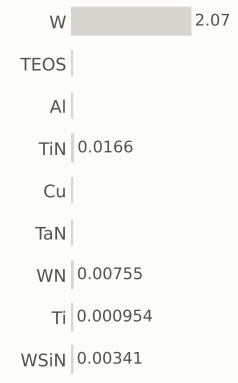

gases emitted (g)

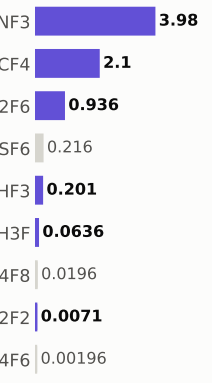

Step #4810: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	344.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

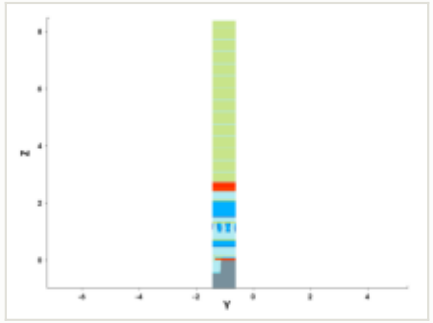

y cut at -1.035 µm

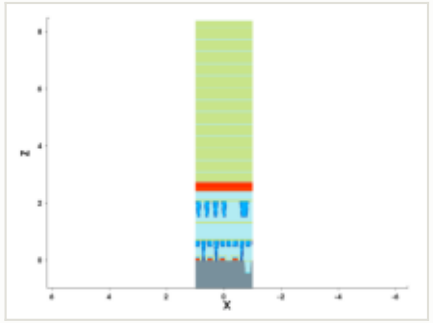

mask for this step


no mask for this step

this step


process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

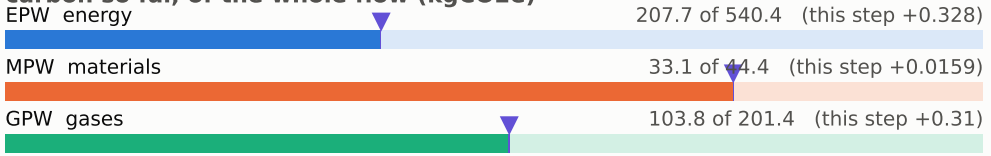


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

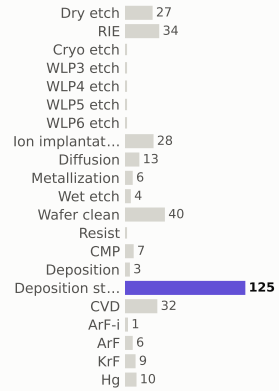

materials deposited (g)

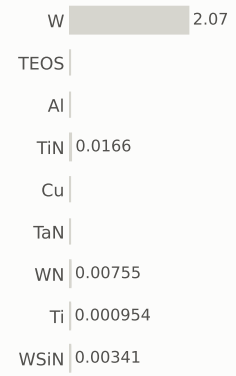

gases emitted (g)

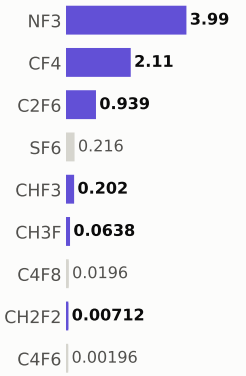

Step #4820: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	345.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




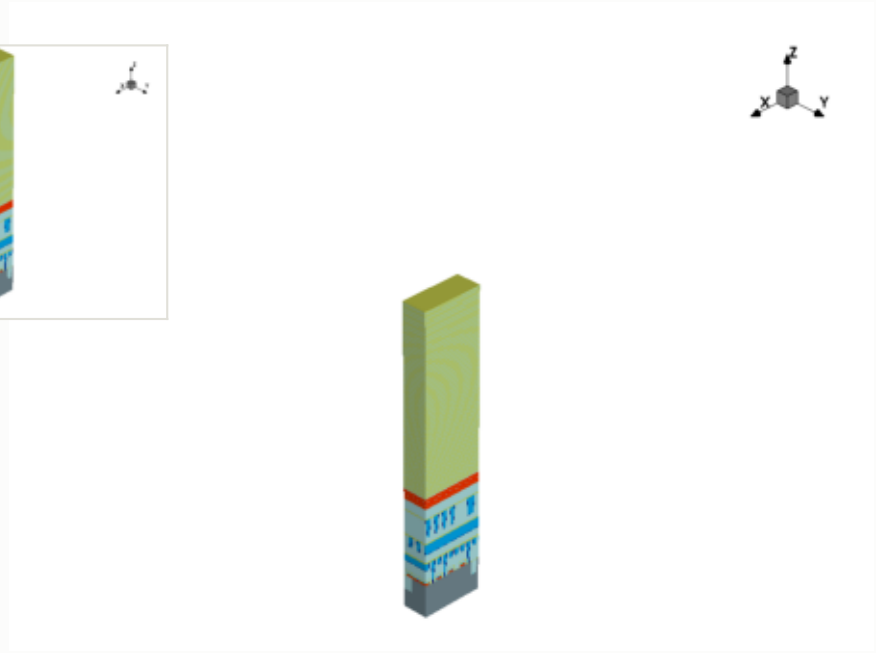


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

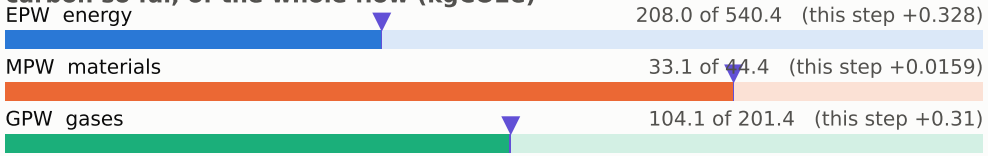


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

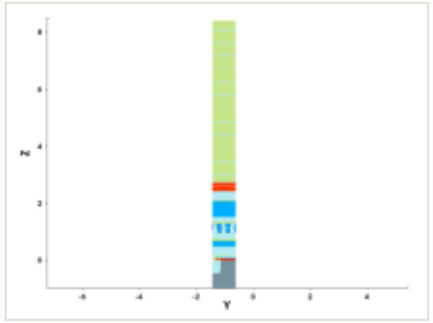


y cut at -1.035 µm

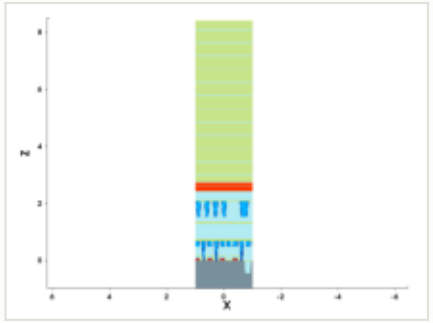


mask for this step

no mask for this step


steps by process area

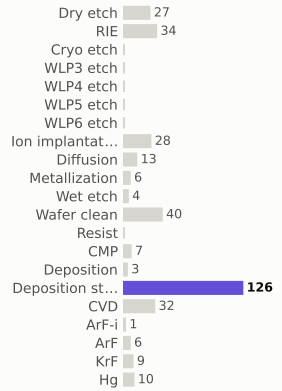

materials deposited (g)

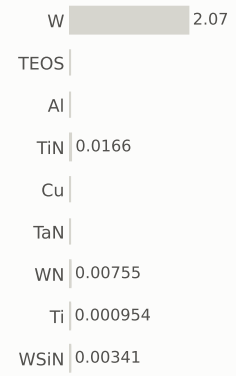

gases emitted (g)



Step #4830: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	345.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




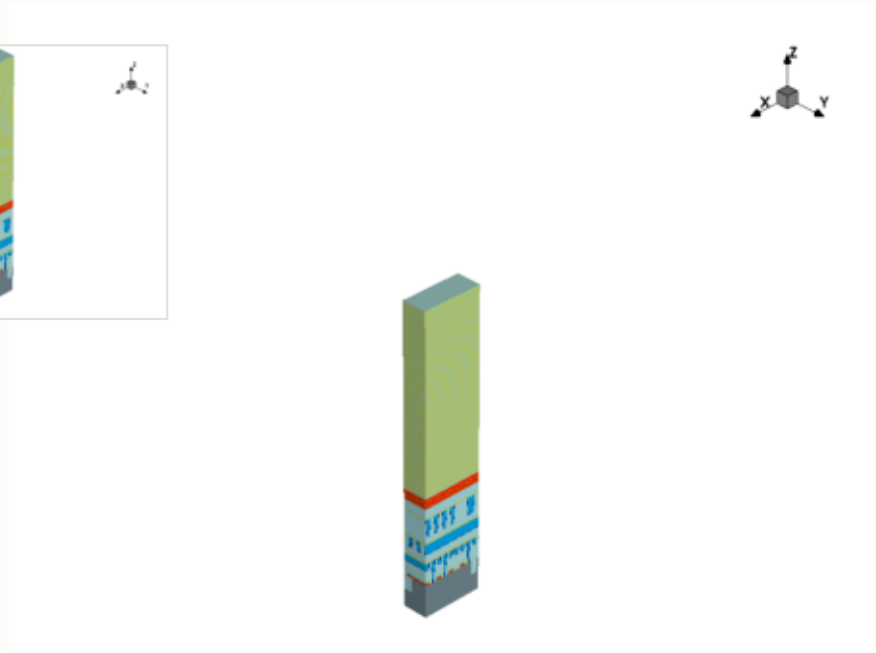


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

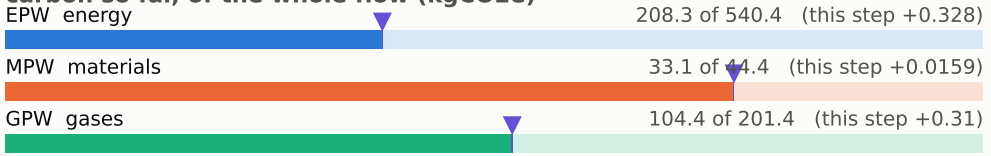


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

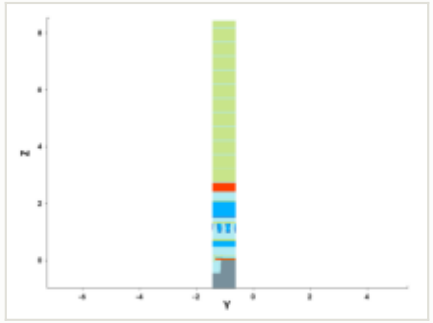


y cut at -1.035 µm

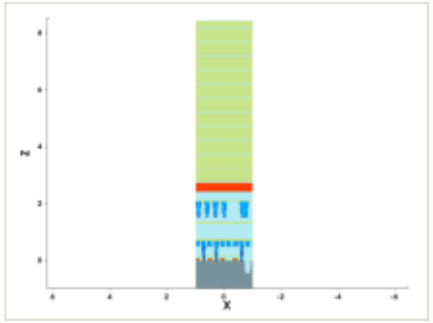

mask for this step

no mask for this step


steps by process area

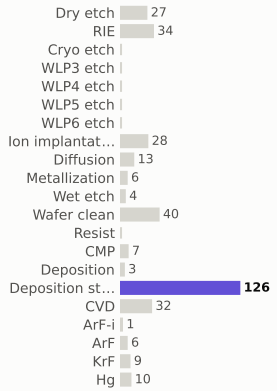

materials deposited (g)



gases emitted (g)



Step #4840: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	346.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




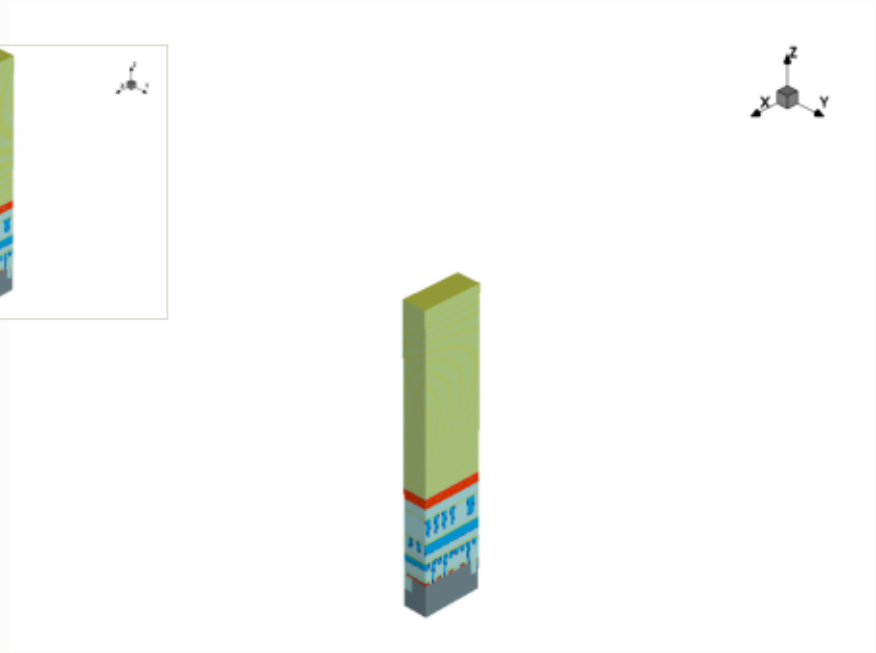


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

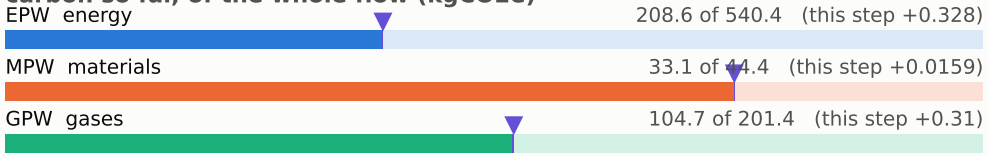


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

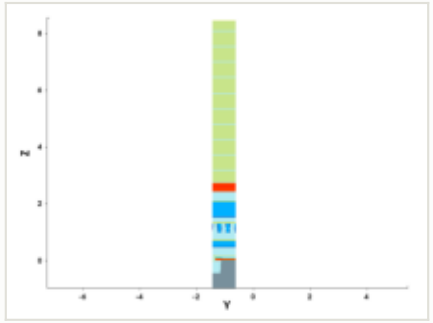


y cut at -1.035 µm

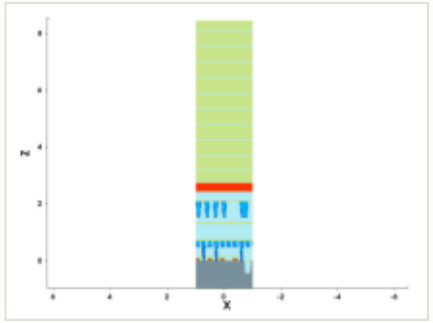


mask for this step

no mask for this step


steps by process area

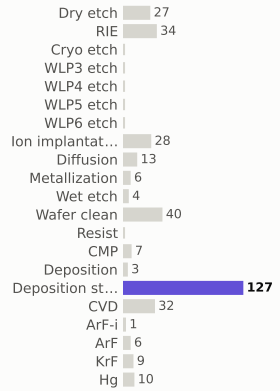

materials deposited (g)

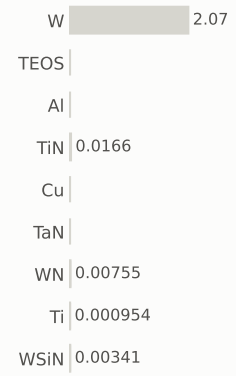

gases emitted (g)

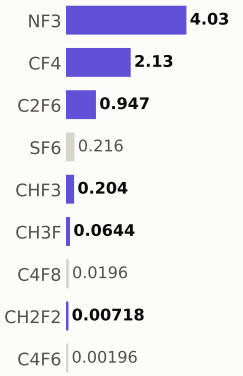

Step #4850: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	347.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




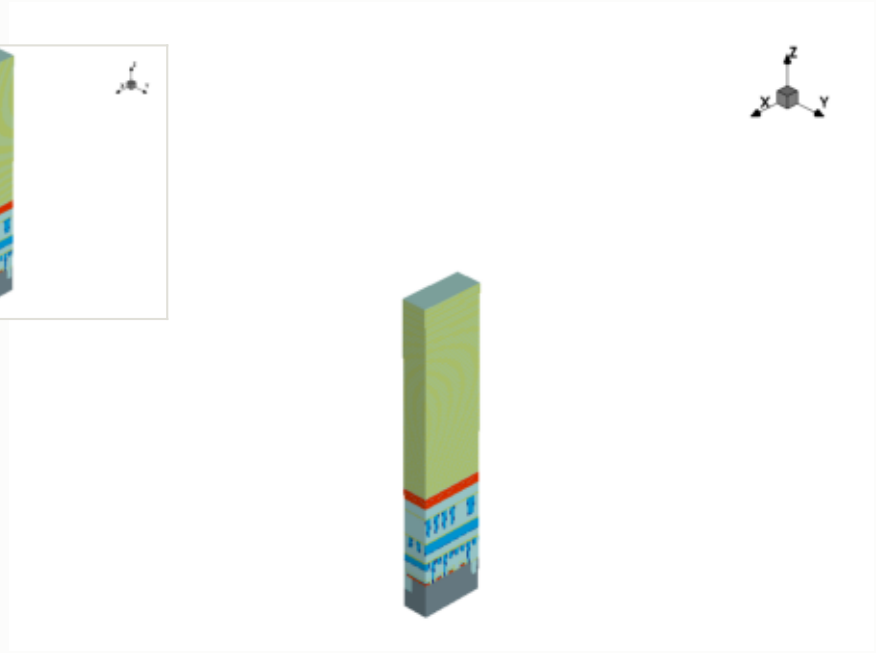


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

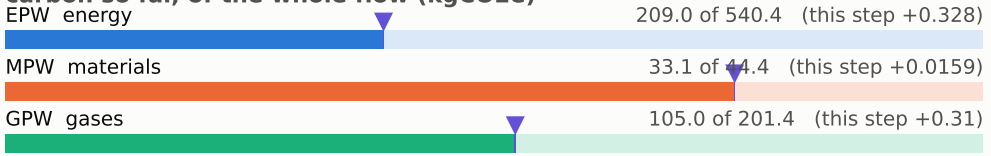


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

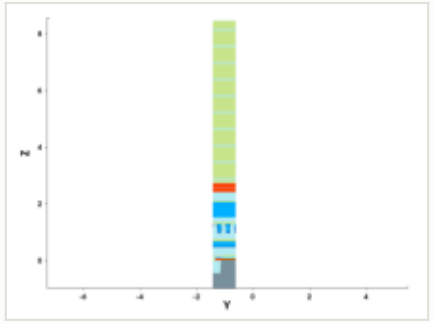


y cut at -1.035 µm

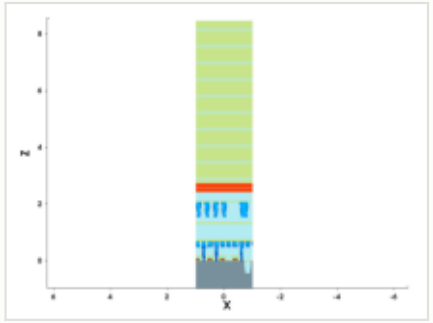

mask for this step

no mask for this step


steps by process area

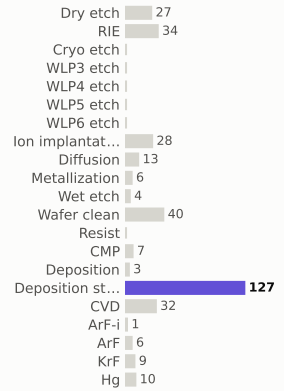

materials deposited (g)



gases emitted (g)



Step #4860: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	347.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




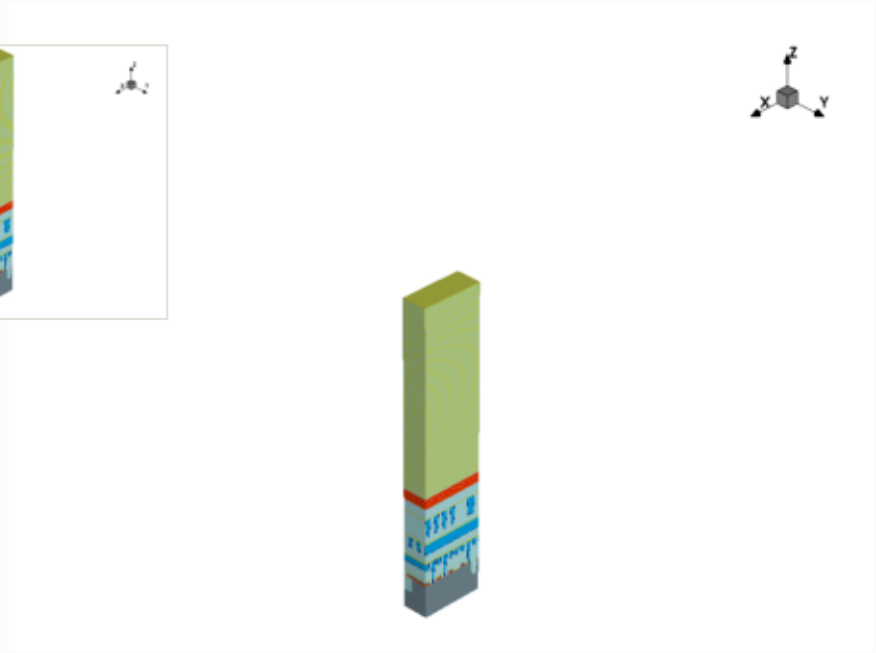


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

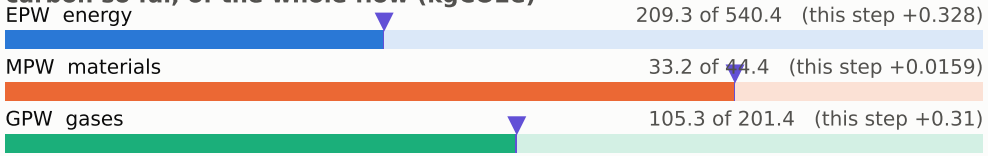


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

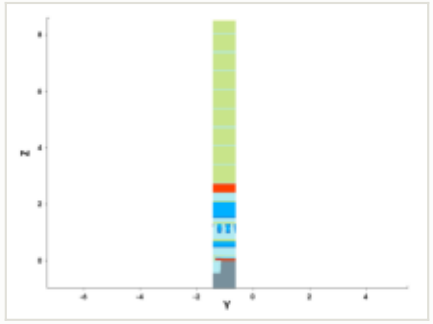


y cut at -1.035 µm

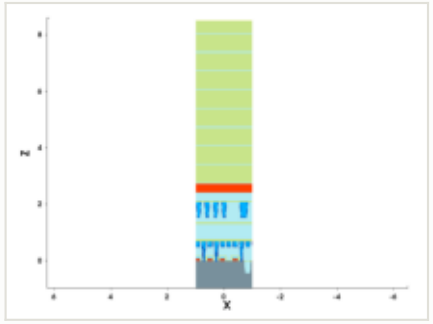

mask for this step

no mask for this step


steps by process area

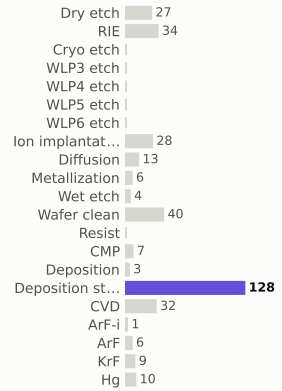

materials deposited (g)



gases emitted (g)



Step #4870: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	348.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




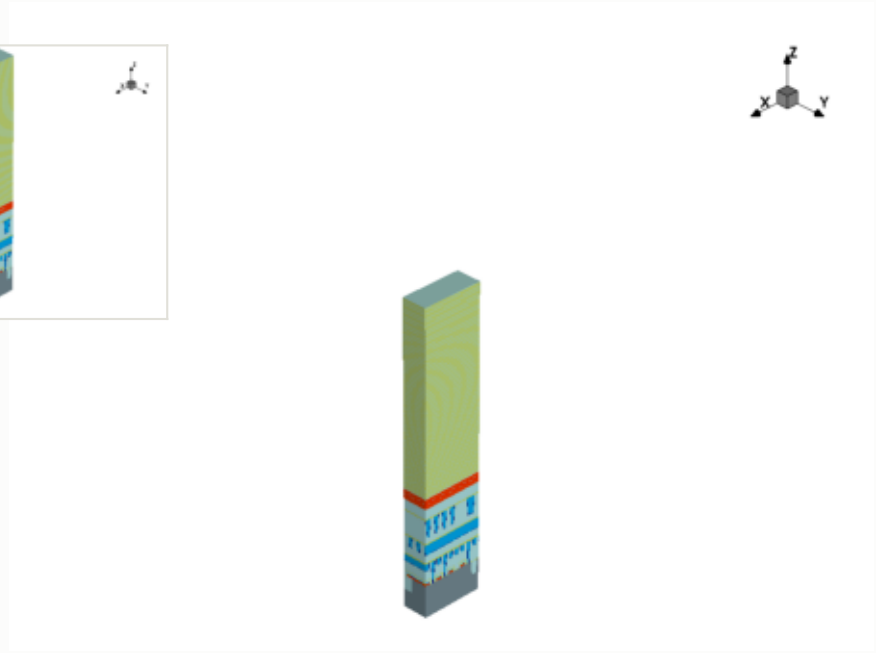


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

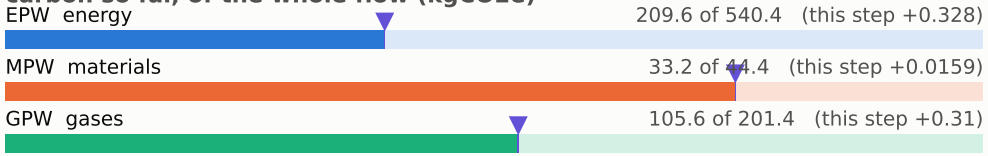


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

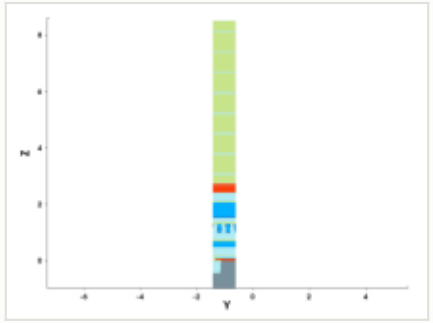


y cut at -1.035 µm

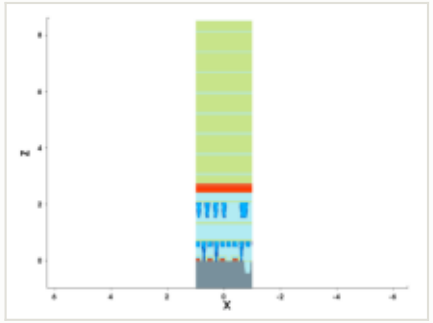

mask for this step

no mask for this step


steps by process area

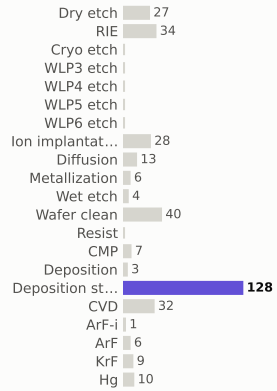

materials deposited (g)



gases emitted (g)

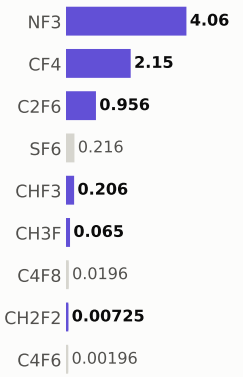

Step #4880: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	349.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




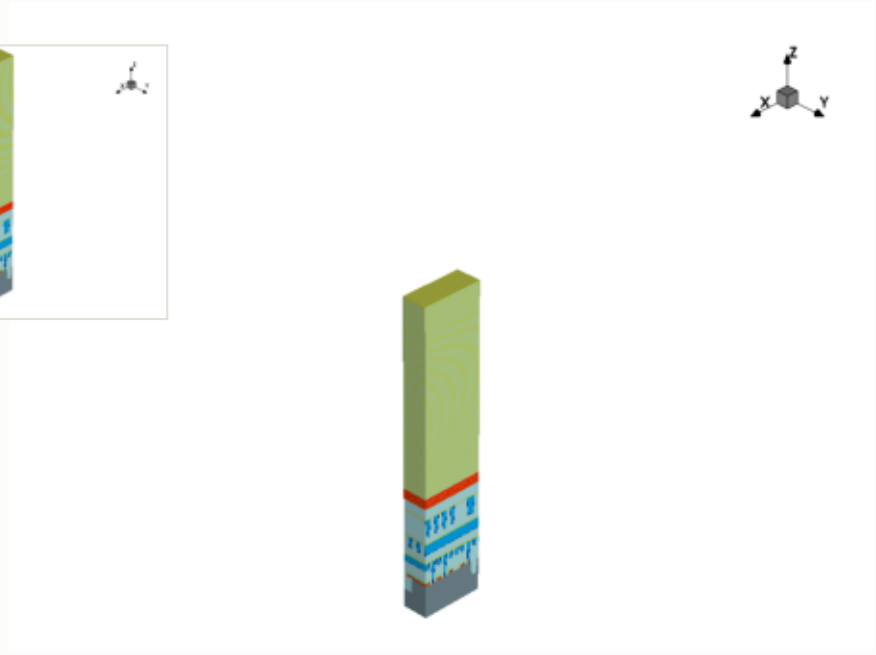


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

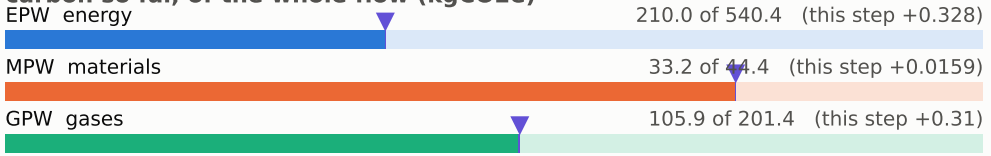


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

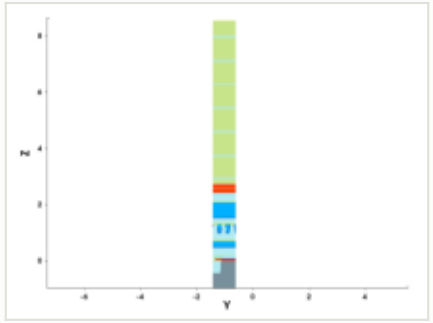


y cut at -1.035 µm

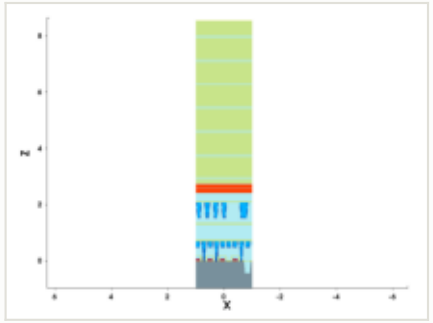


mask for this step

no mask for this step


steps by process area

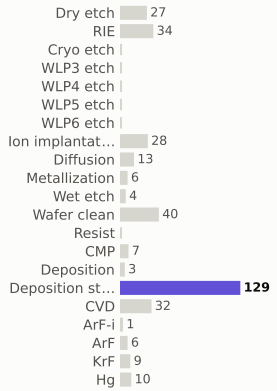

materials deposited (g)

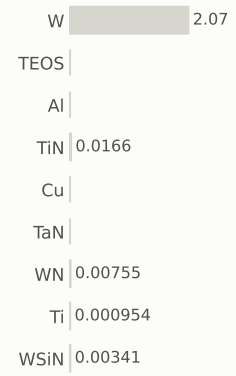

gases emitted (g)

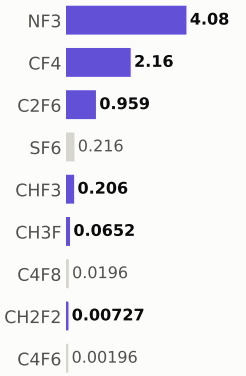

Step #4890: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	349.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




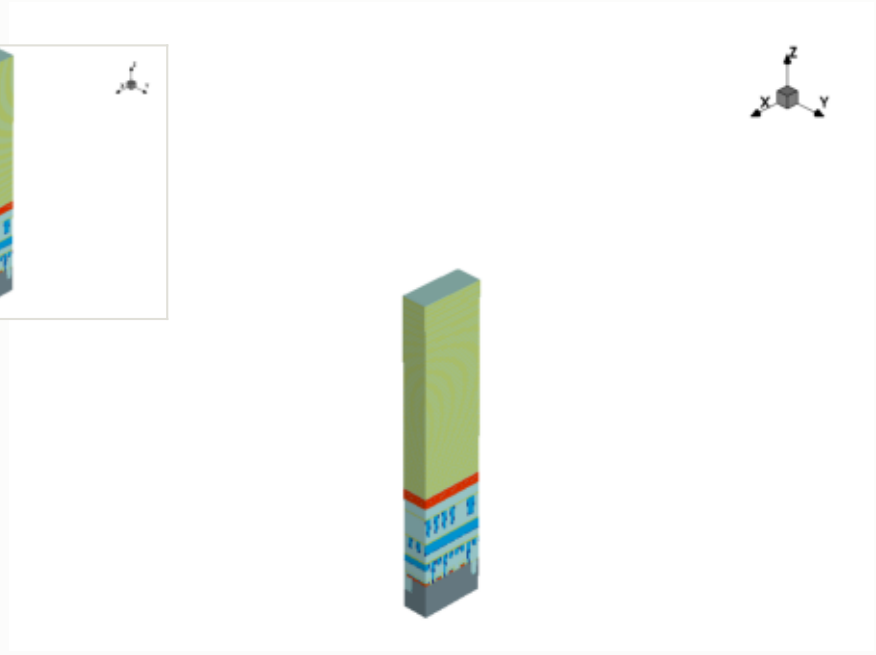


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

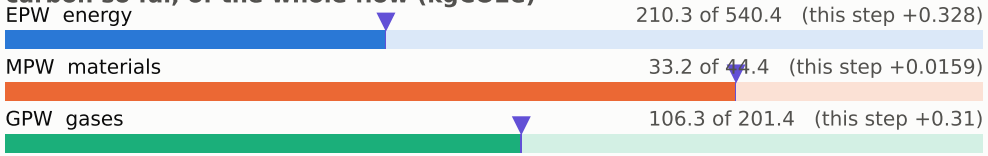


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

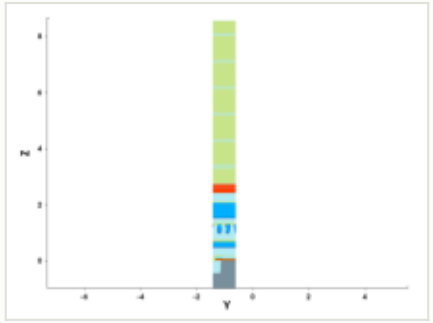


y cut at -1.035 µm

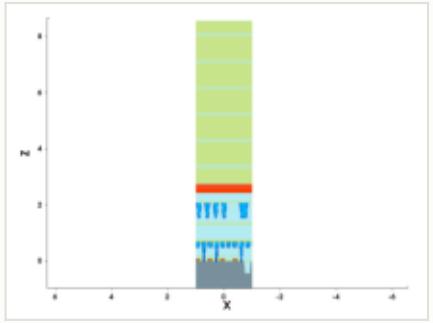

mask for this step

no mask for this step


steps by process area

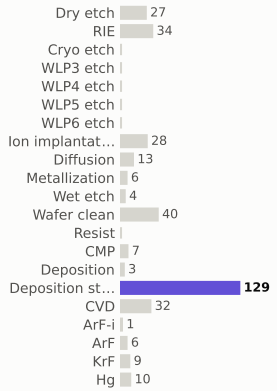

materials deposited (g)



gases emitted (g)



Step #4900: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	350.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




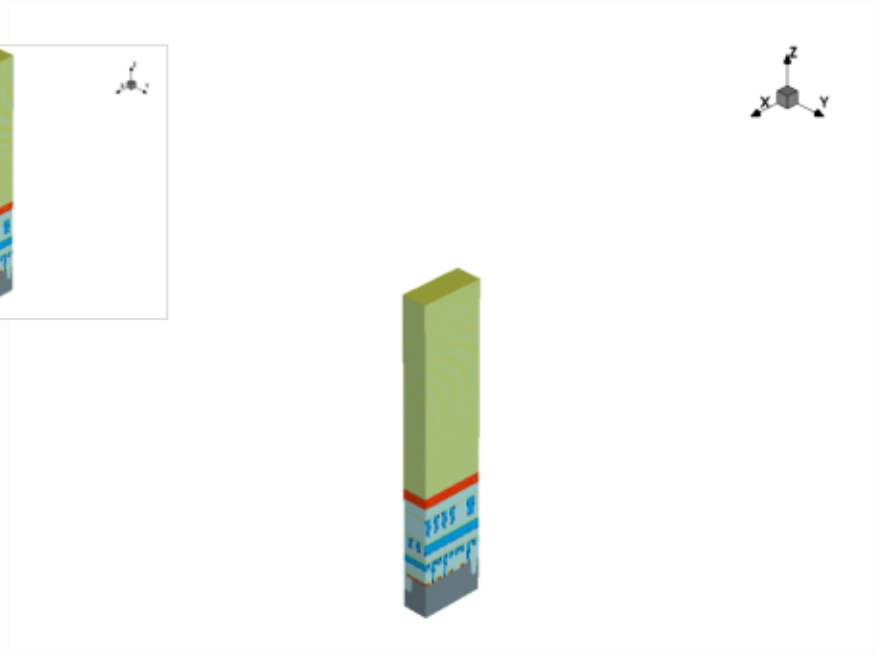


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

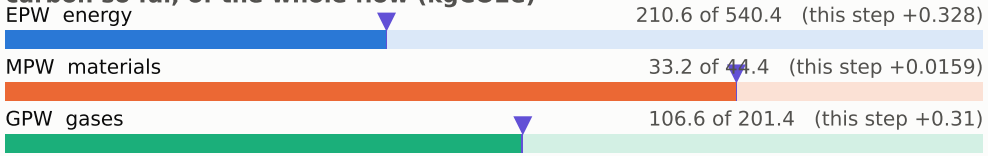


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

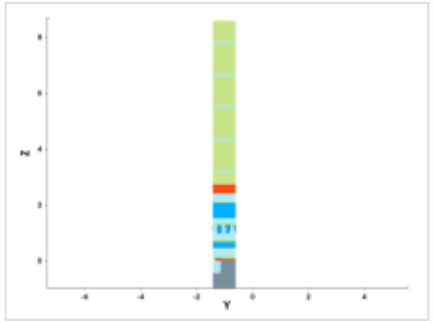


y cut at -1.035 µm

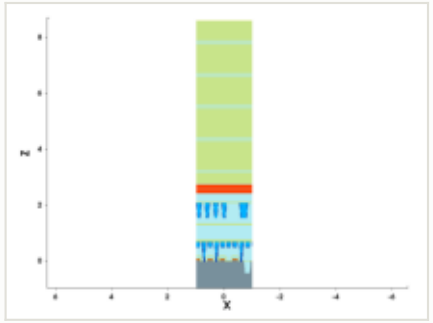


mask for this step

no mask for this step


steps by process area

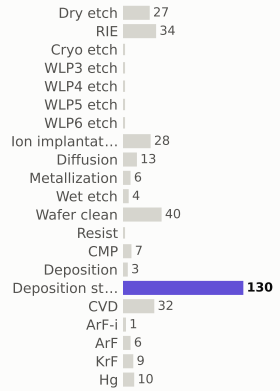

materials deposited (g)

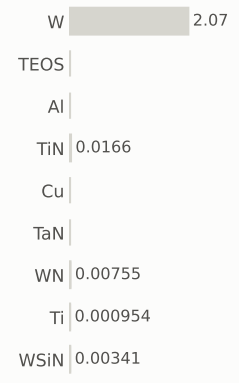

gases emitted (g)



Step #4910: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	351.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




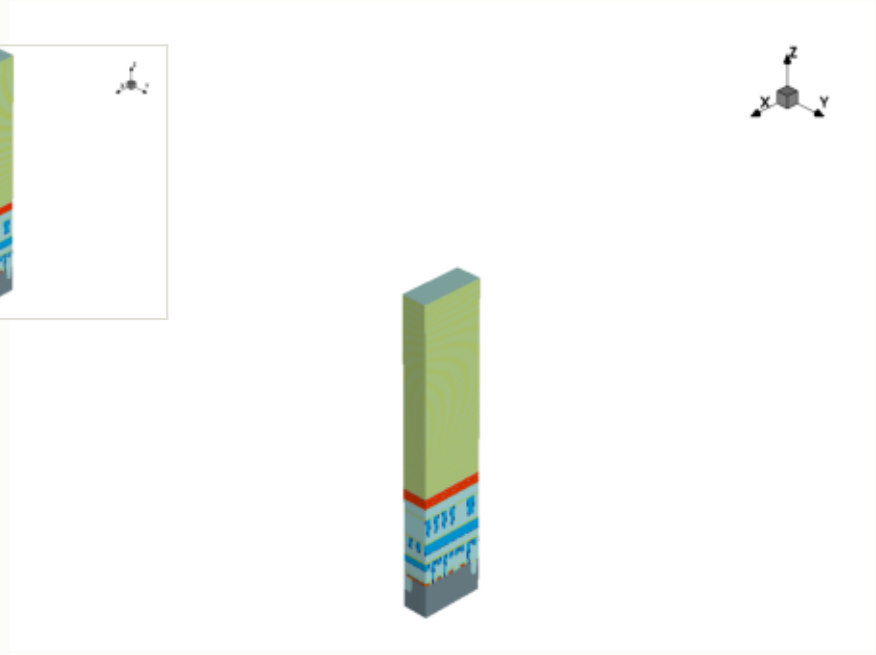


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

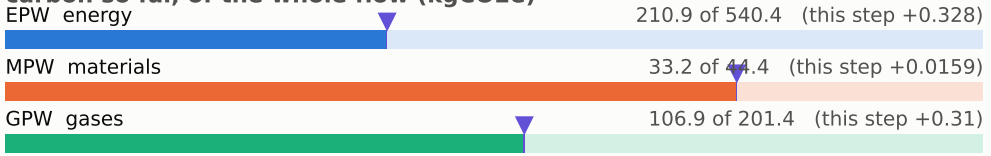


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

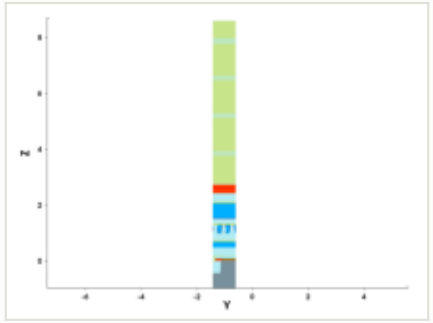


y cut at -1.035 µm

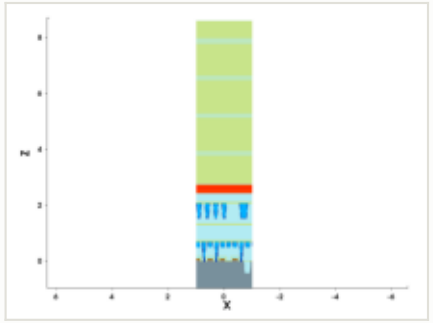


mask for this step

no mask for this step


steps by process area

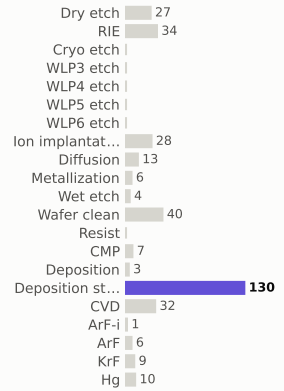

materials deposited (g)

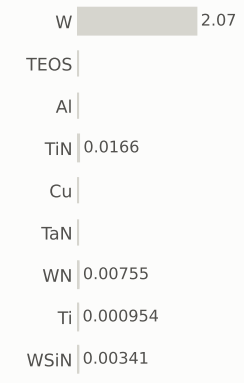

gases emitted (g)

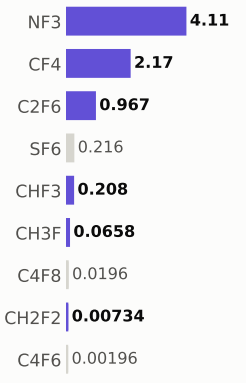

Step #4920: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	351.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




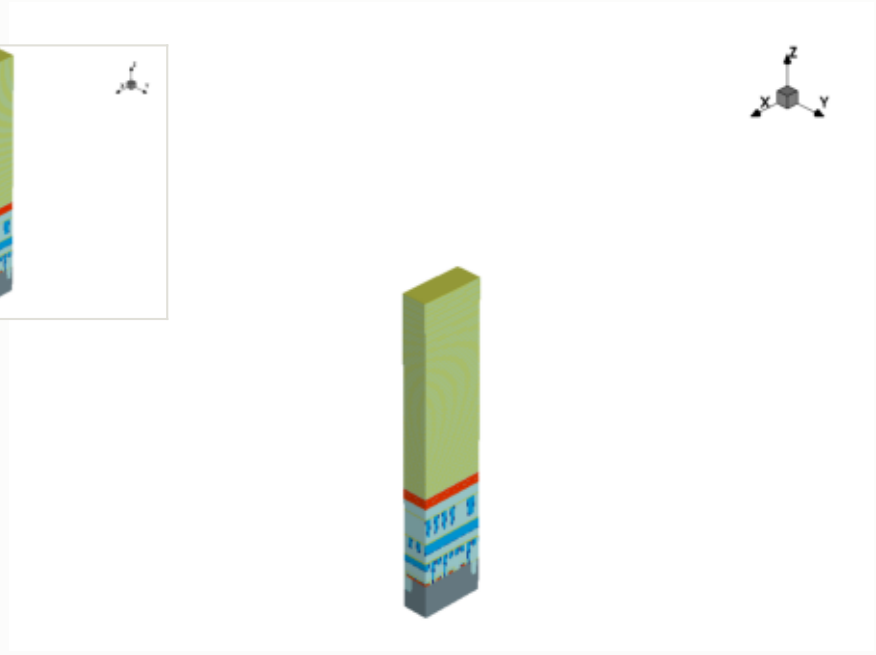


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

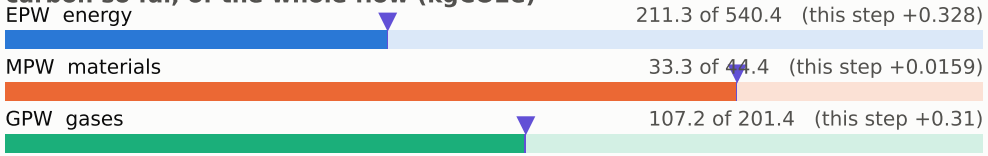


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

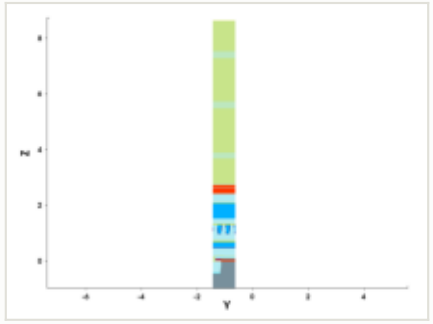


y cut at -1.035 µm

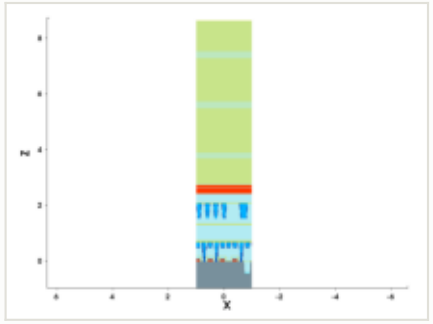

mask for this step

no mask for this step


steps by process area

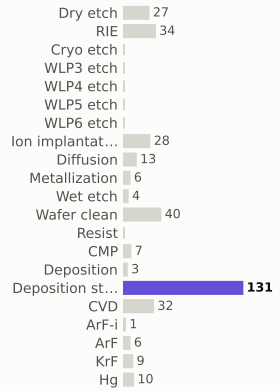

materials deposited (g)



gases emitted (g)



Step #4930: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	352.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




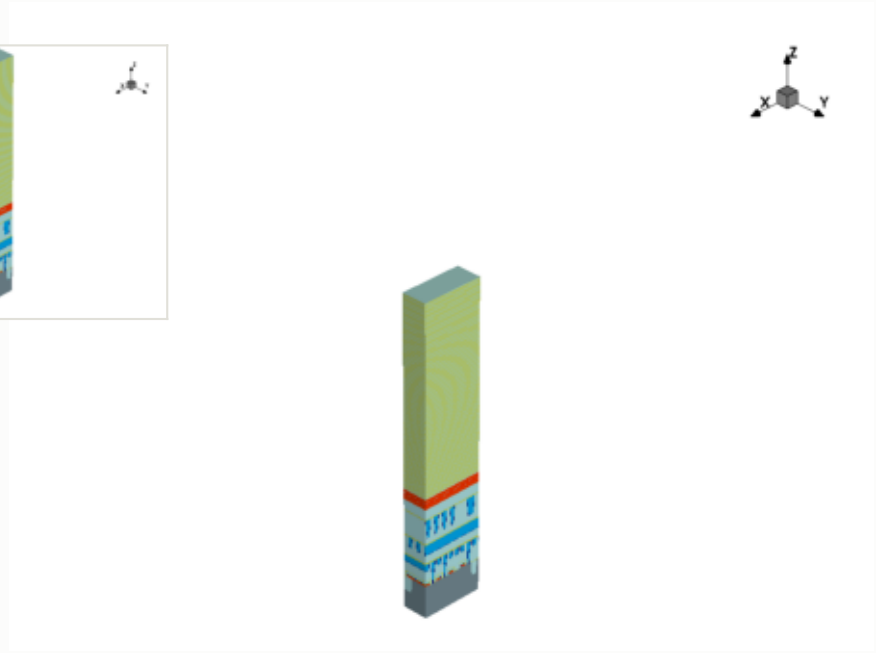


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

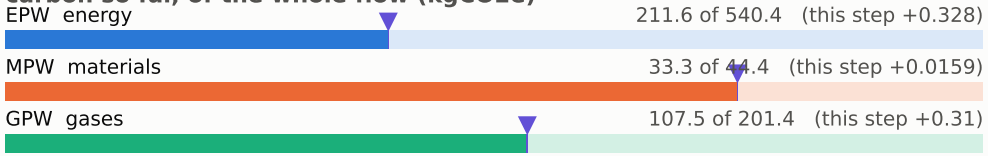


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

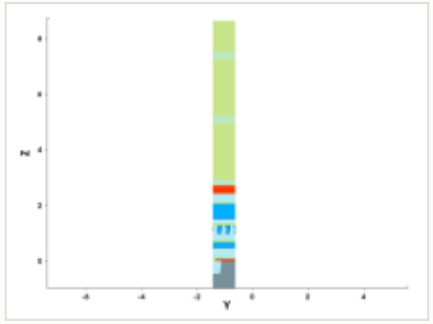


y cut at -1.035 µm

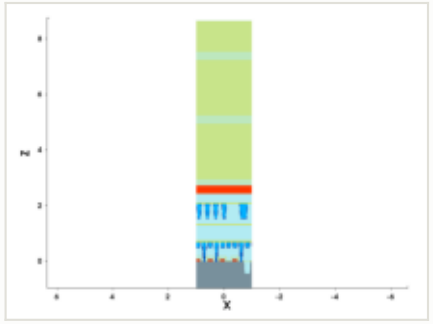


mask for this step

no mask for this step


steps by process area

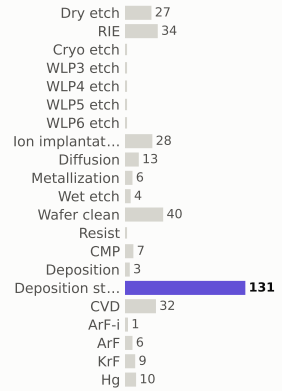

materials deposited (g)

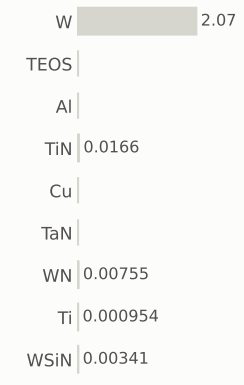

gases emitted (g)



Step #4940: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	353.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




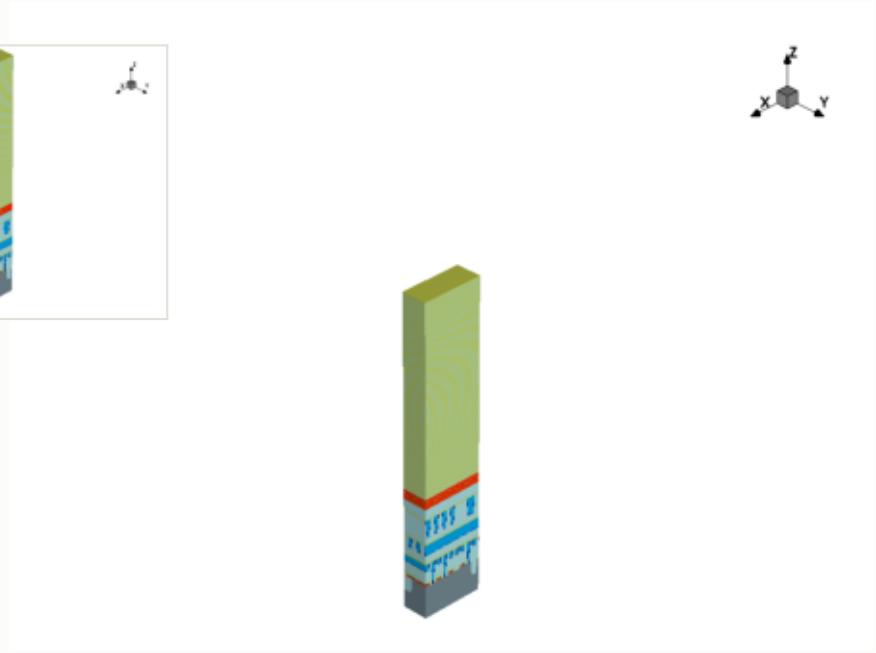


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

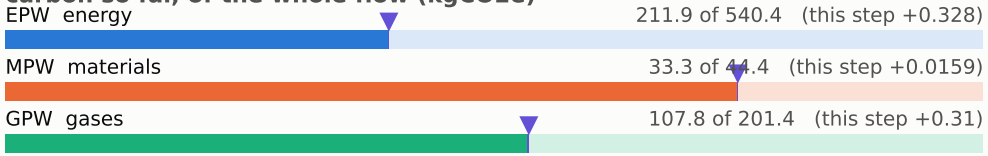


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

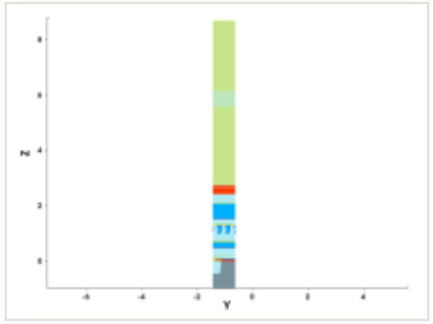


y cut at -1.035 µm

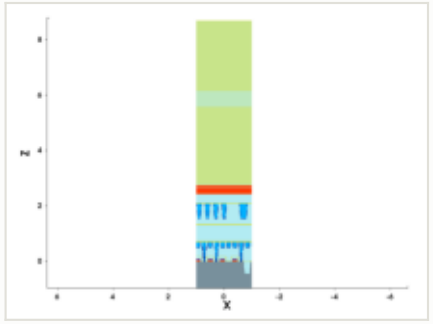

mask for this step

no mask for this step


steps by process area

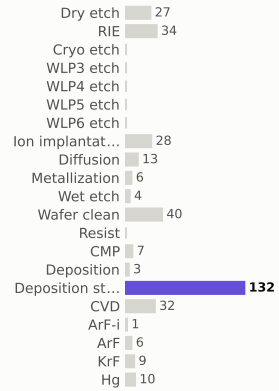

materials deposited (g)



gases emitted (g)



Step #4950: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	353.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




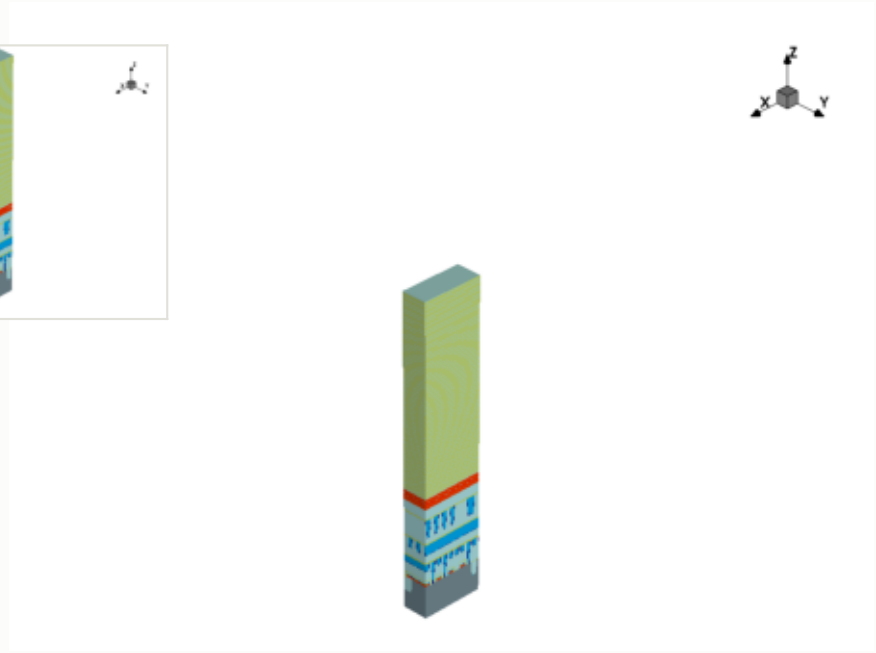

x cut at 0.000 µm

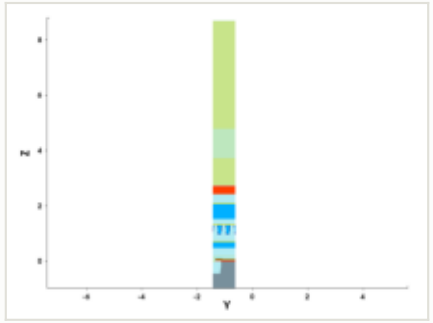

y cut at -1.035 µm

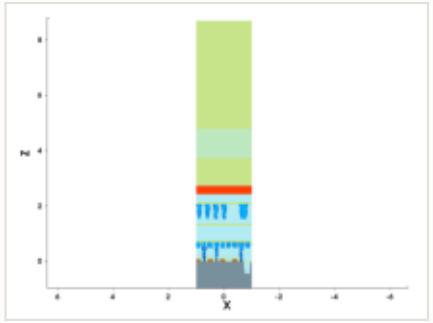


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

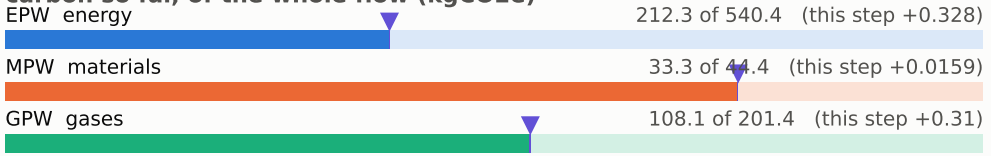


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

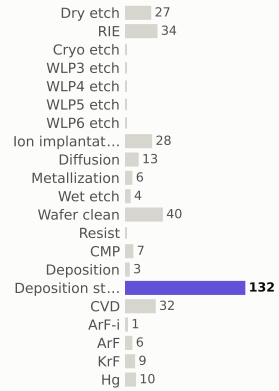

materials deposited (g)

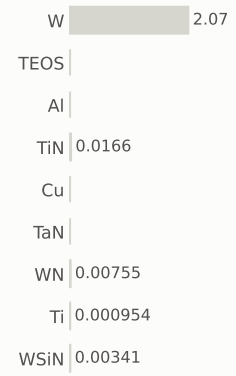

gases emitted (g)

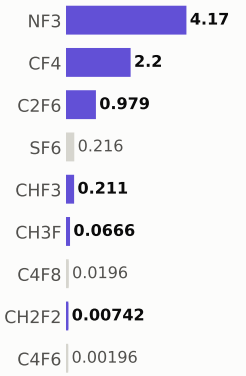

Step #4960: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	354.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




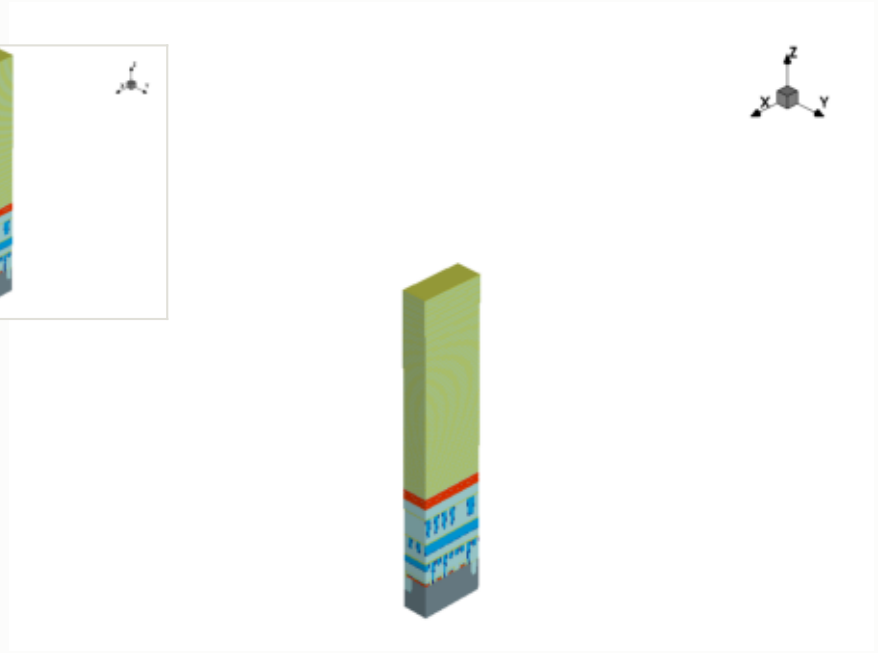

x cut at 0.000 µm

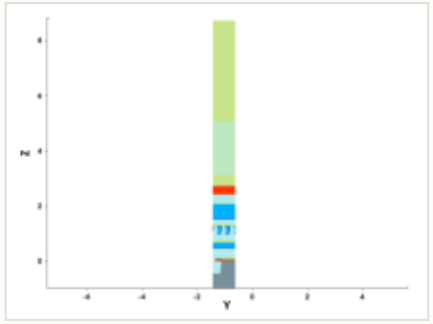

y cut at -1.035 µm

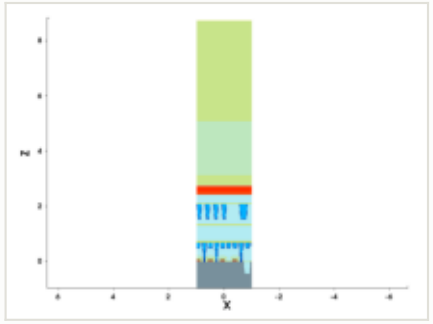


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

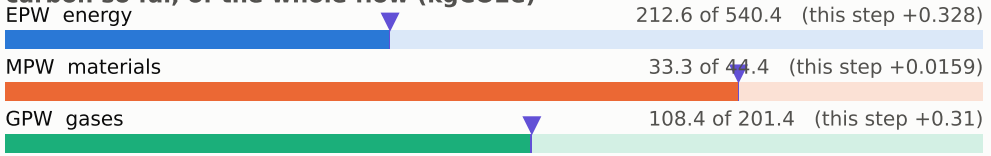


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

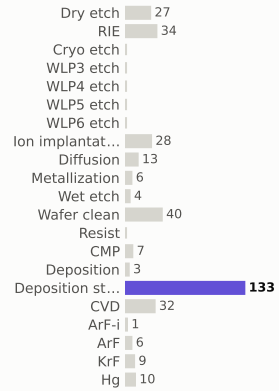

materials deposited (g)

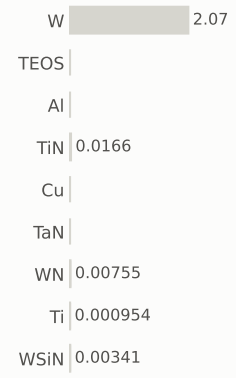

gases emitted (g)

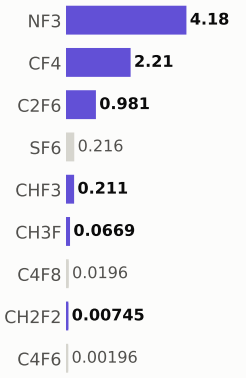

Step #4970: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	355.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 212.9 of 540.4 (this step +0.328)


MPW materials — 33.3 of 44.4 (this step +0.0159)

GPW gases — 108.7 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

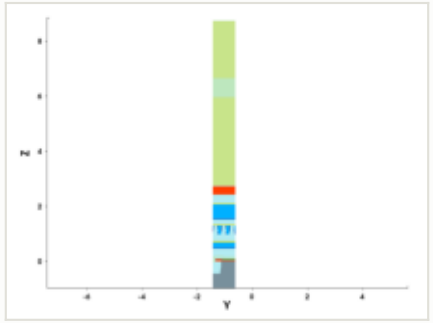


y cut at -1.035 µm

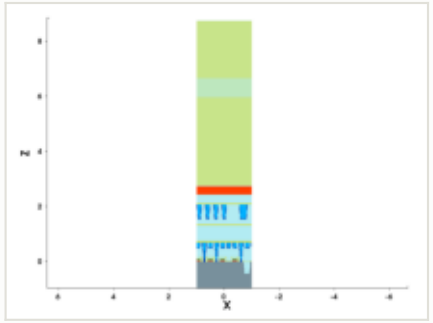

mask for this step

no mask for this step


steps by process area

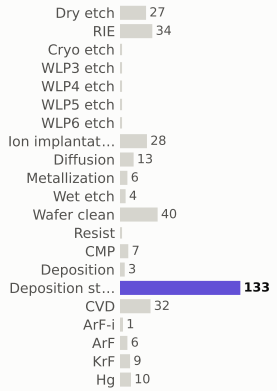

materials deposited (g)



gases emitted (g)



Step #4980: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	355.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




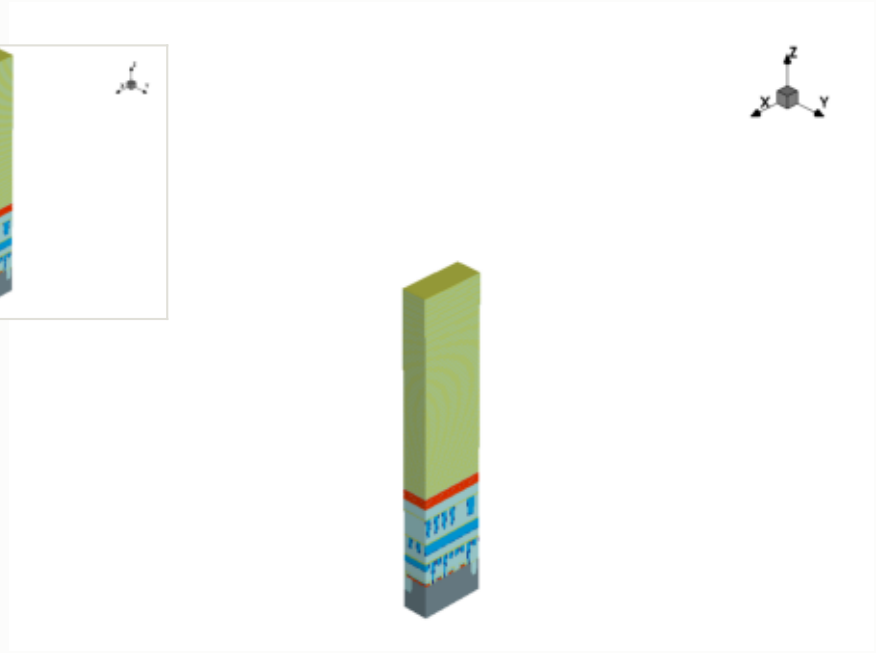

x cut at 0.000 µm

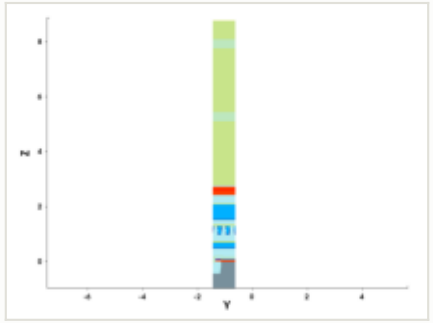

y cut at -1.035 µm

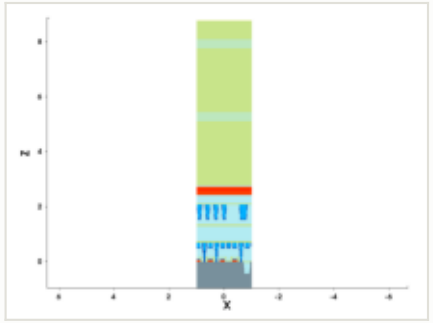


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

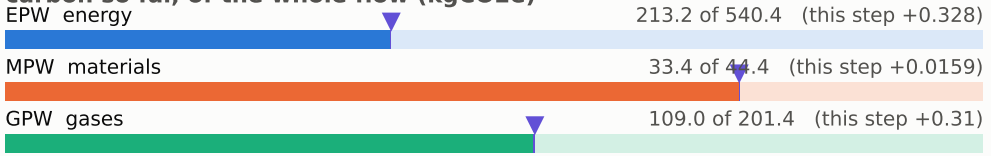


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

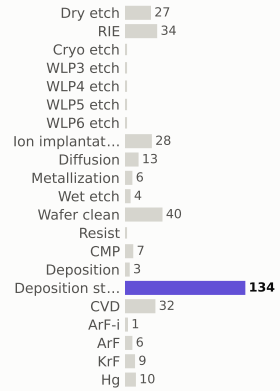

materials deposited (g)

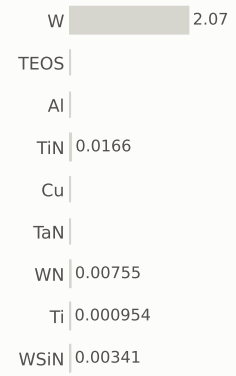

gases emitted (g)

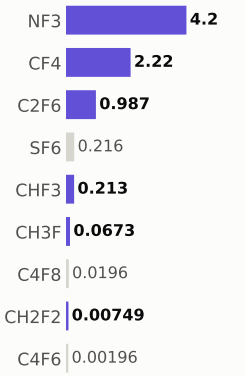

Step #4990: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	356.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




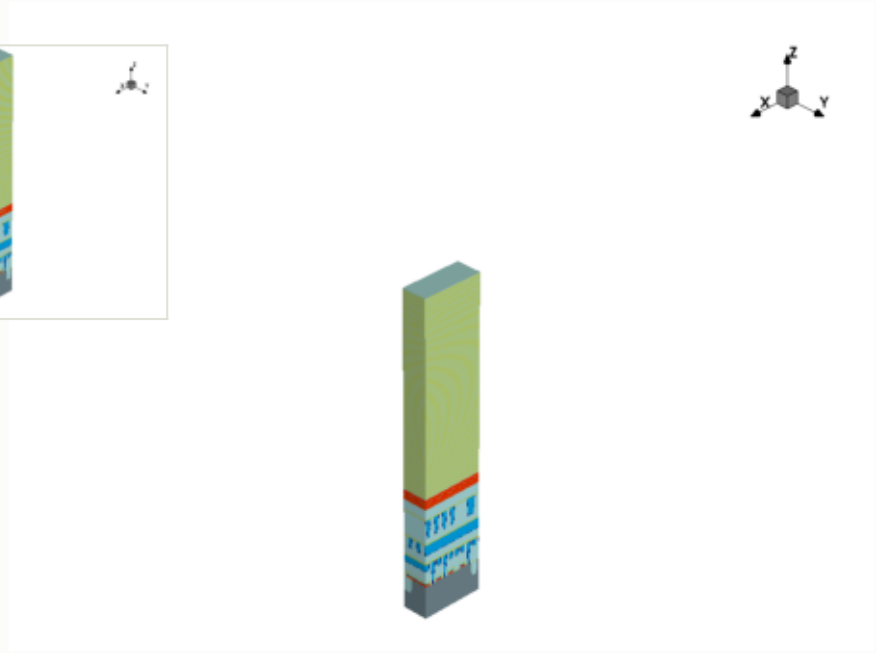


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

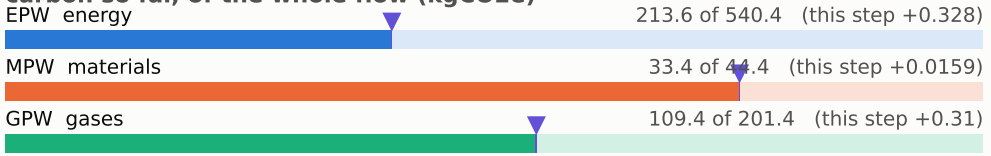


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

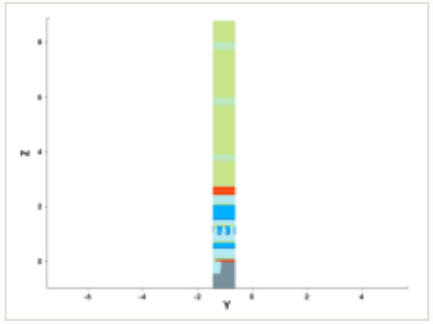


y cut at -1.035 µm

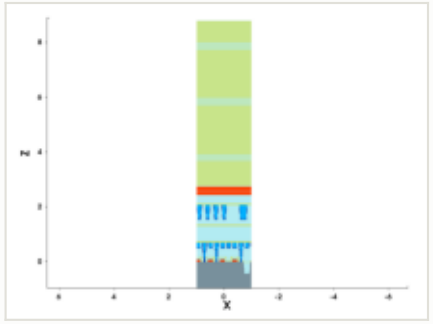

mask for this step

no mask for this step


steps by process area

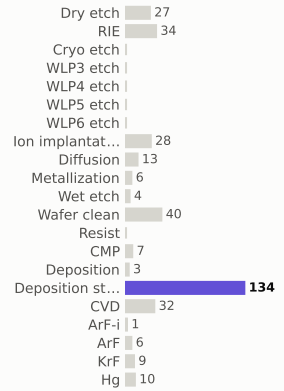

materials deposited (g)



gases emitted (g)



Step #5000: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	356.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




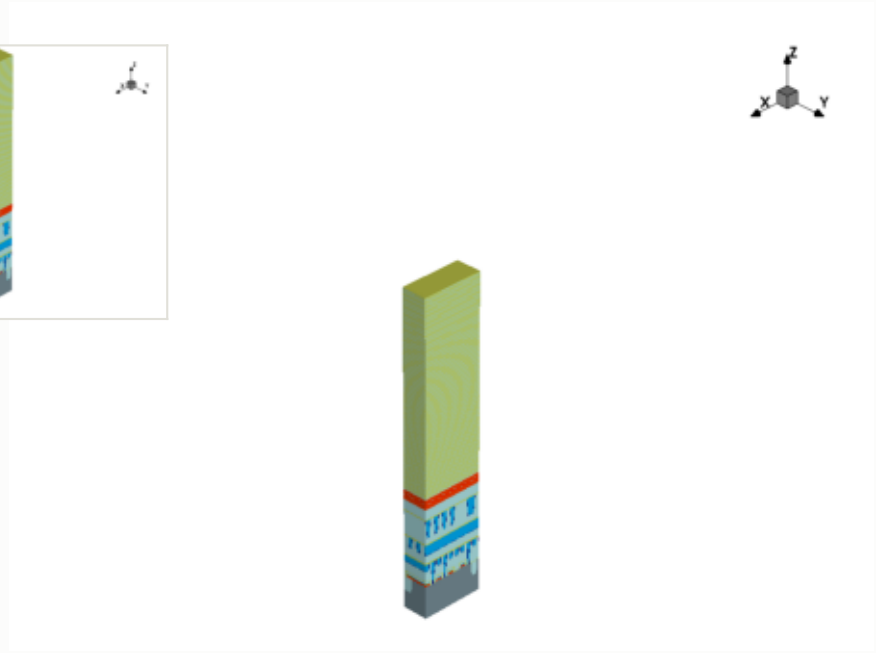

x cut at 0.000 µm

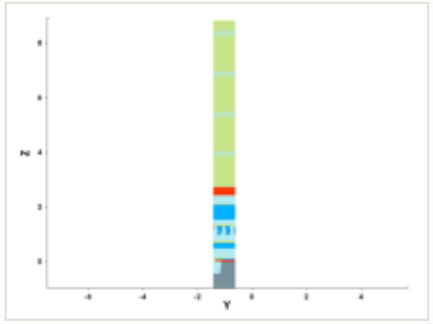

y cut at -1.035 µm

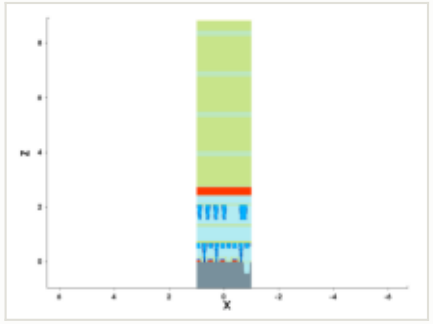


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

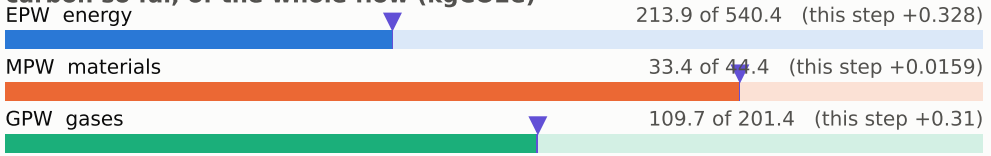


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

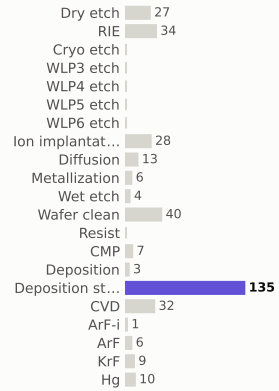

materials deposited (g)

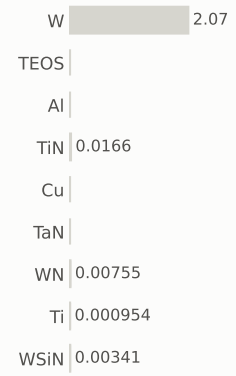

gases emitted (g)

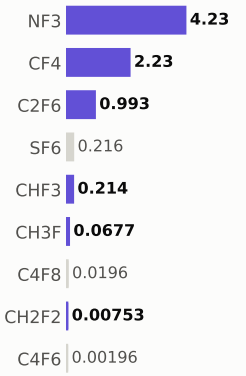

Step #5010: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	357.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




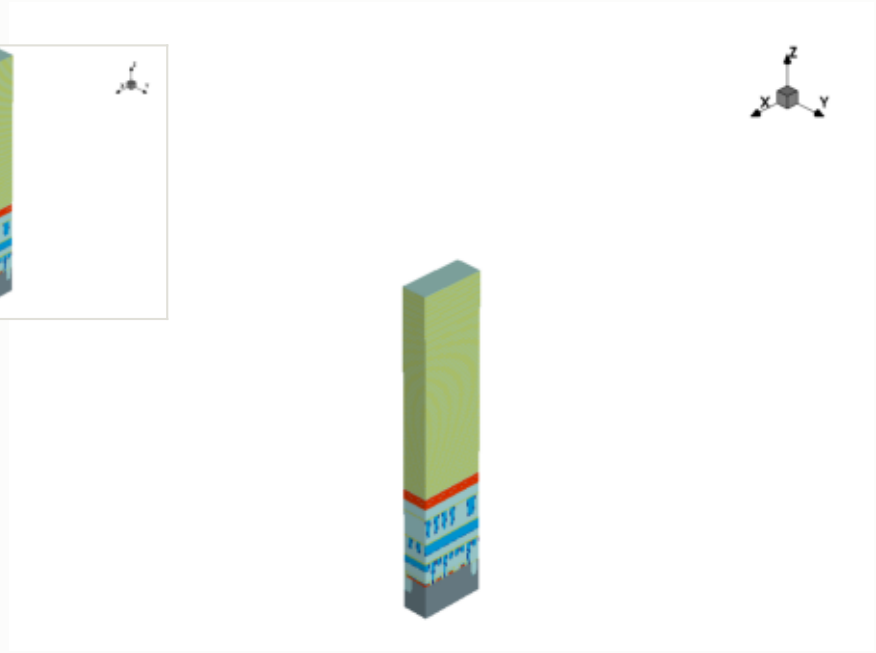

x cut at 0.000 µm

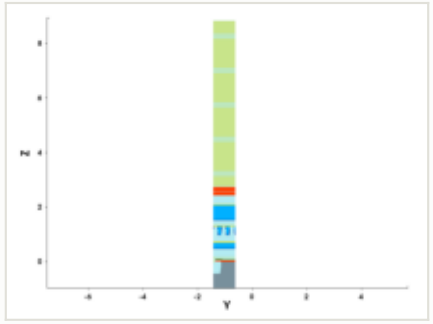

y cut at -1.035 µm

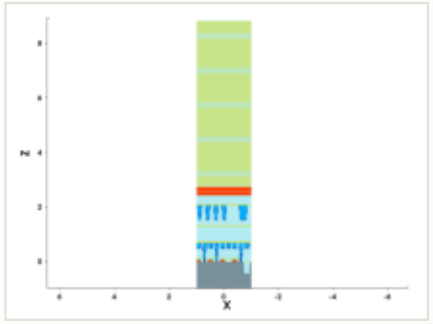


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

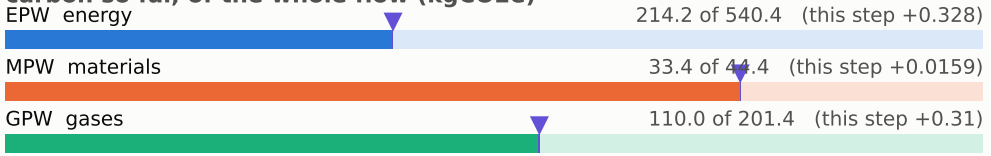


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

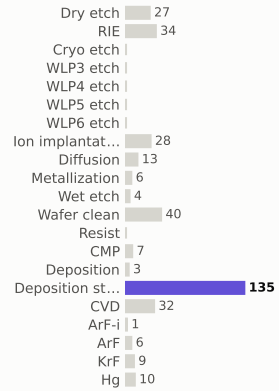

materials deposited (g)

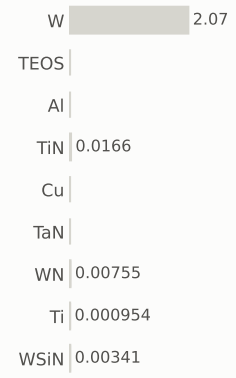

gases emitted (g)

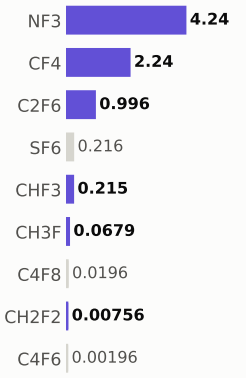

Step #5020: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	358.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




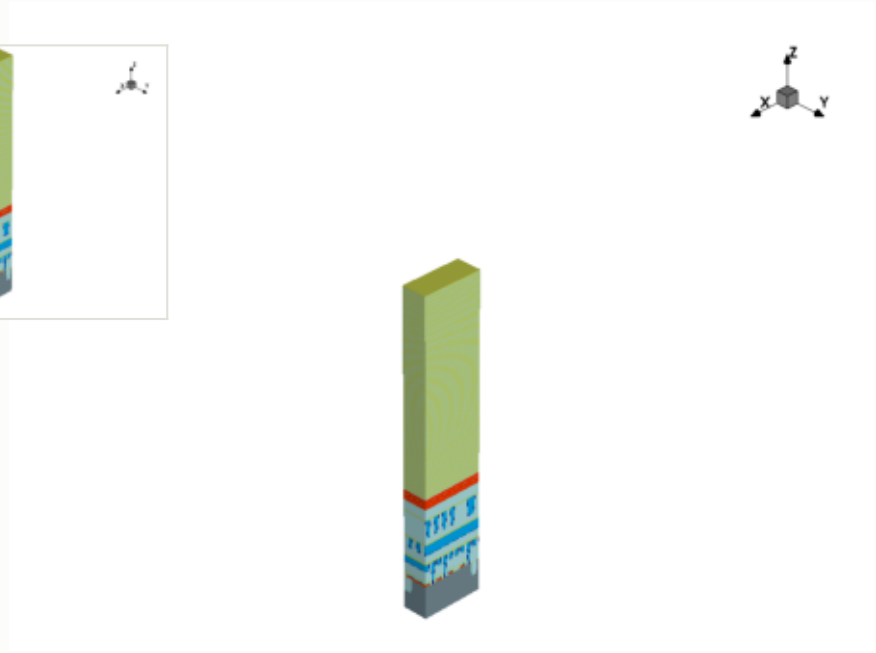


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

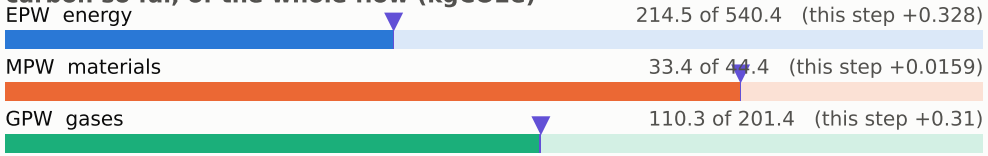


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

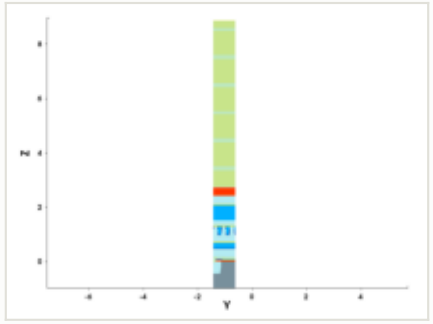


y cut at -1.035 µm

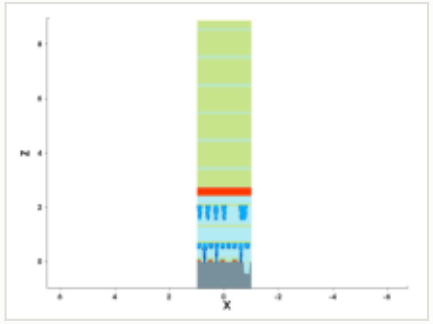

mask for this step

no mask for this step


steps by process area

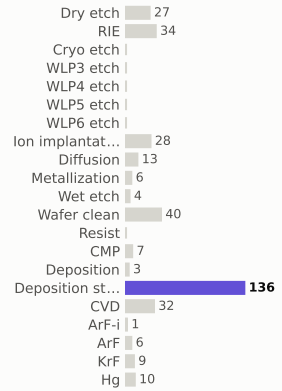

materials deposited (g)



gases emitted (g)



Step #5030: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	358.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




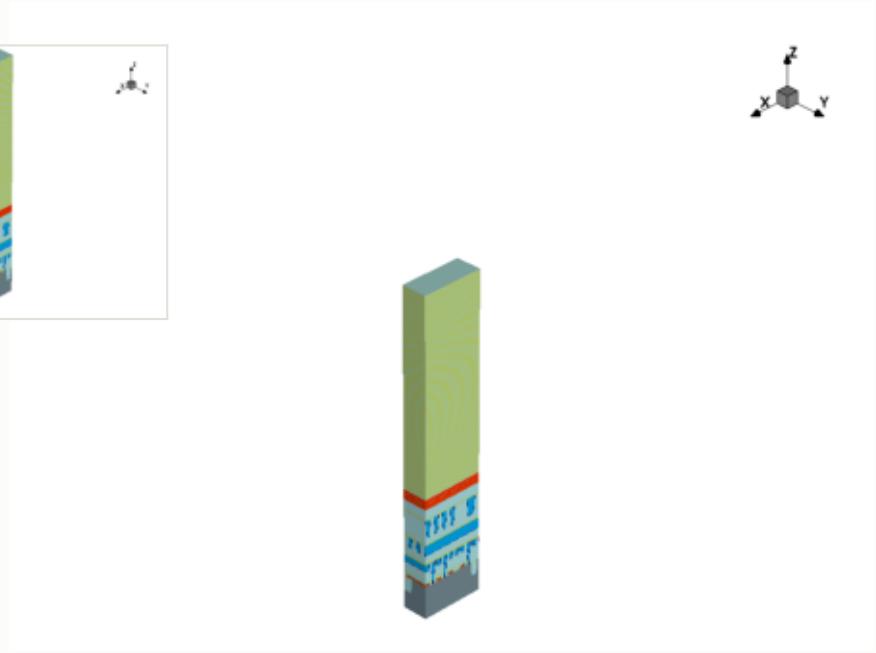

x cut at 0.000 µm

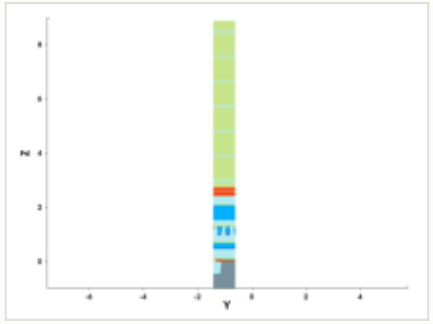

y cut at -1.035 µm

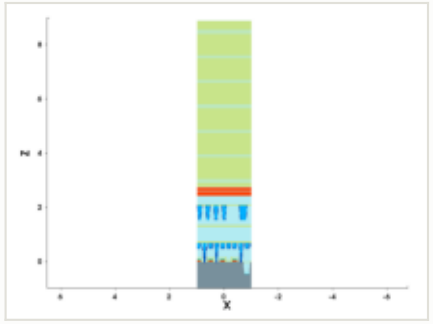


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

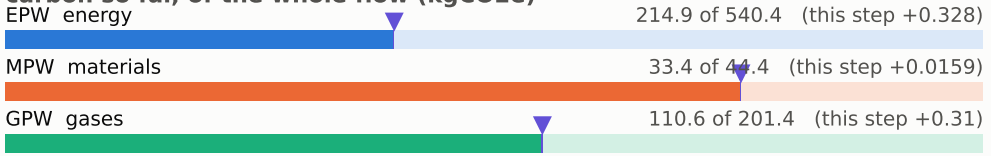


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

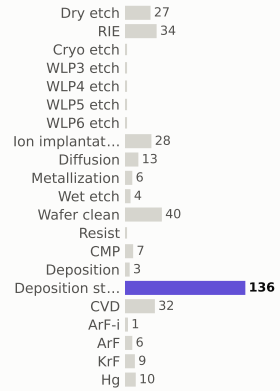

materials deposited (g)

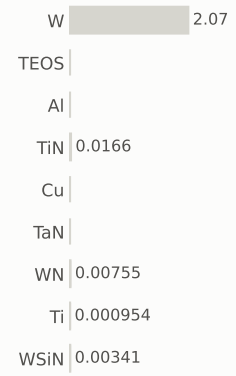

gases emitted (g)

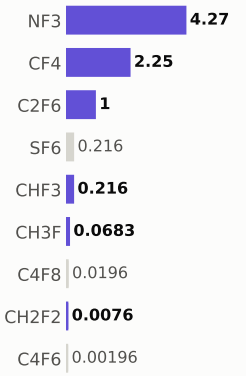


Step #5040: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	359.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

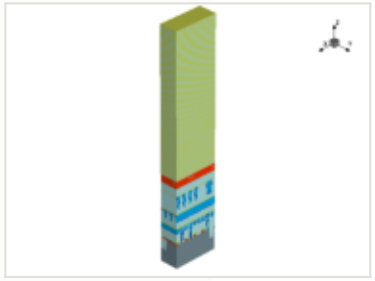


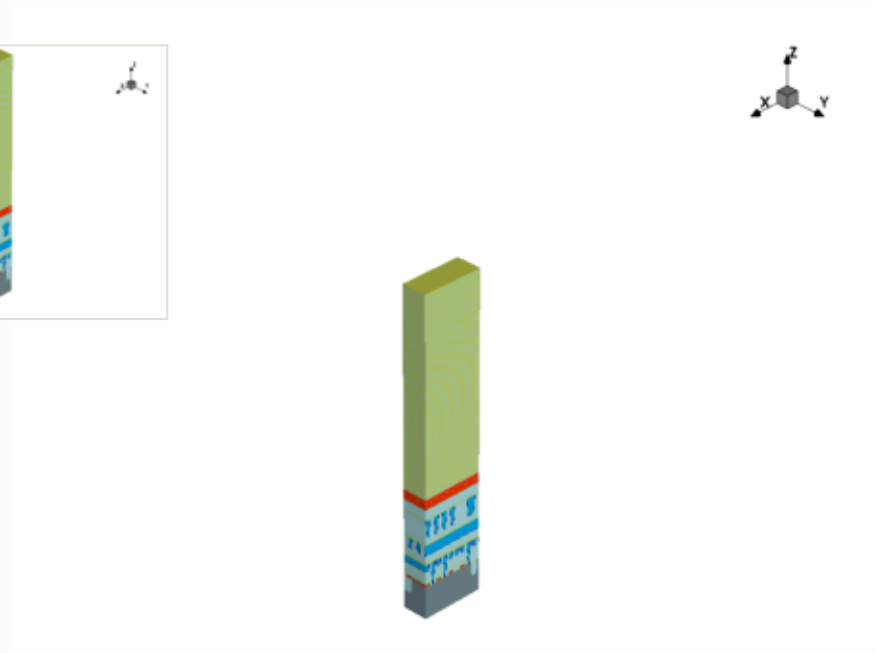


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

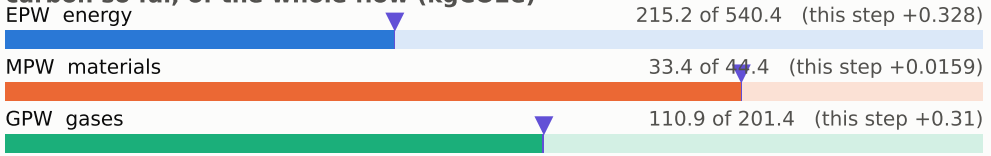


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

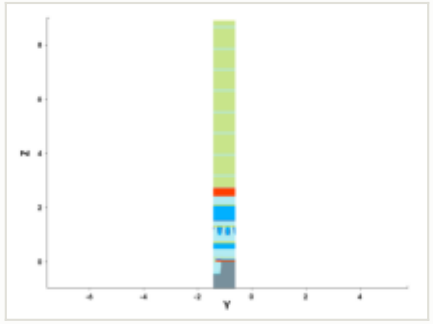


y cut at -1.035 µm

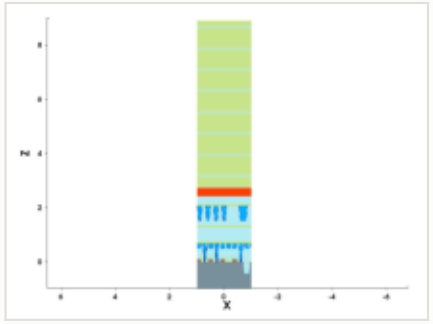


mask for this step

no mask for this step


steps by process area

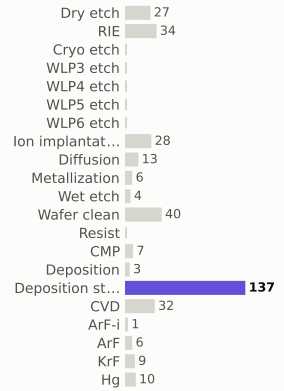

materials deposited (g)

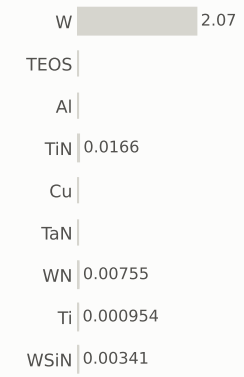

gases emitted (g)

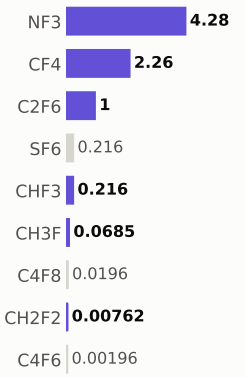

Step #5050: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	360.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




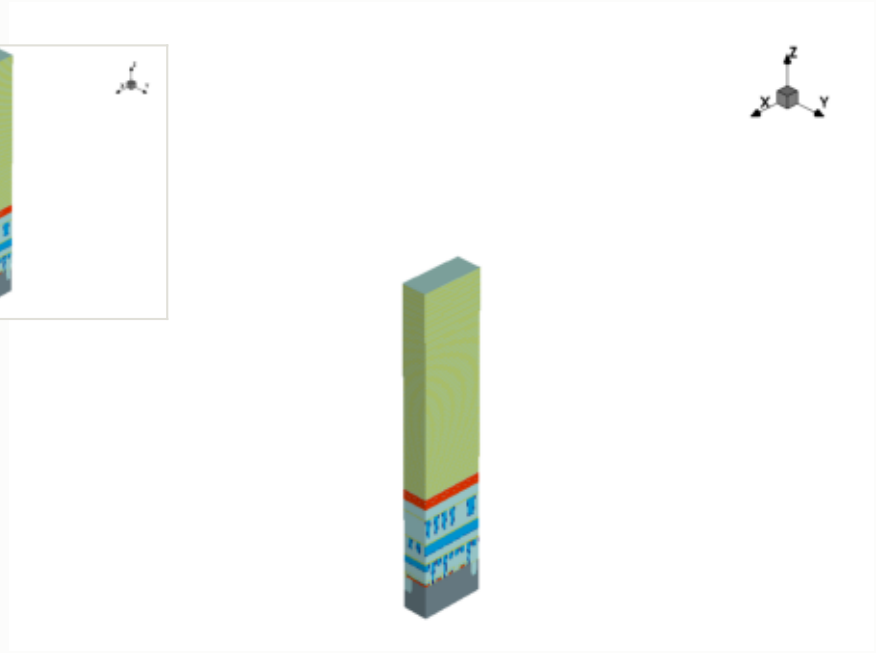


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

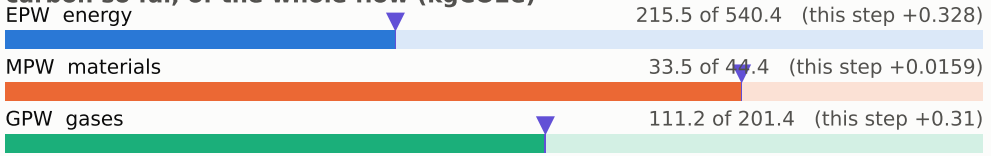


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

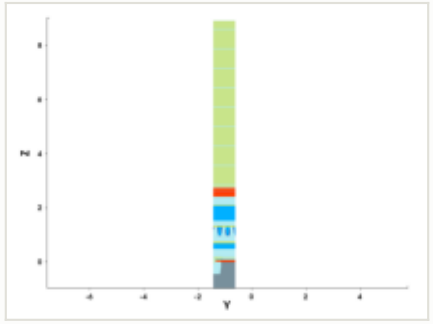


y cut at -1.035 µm

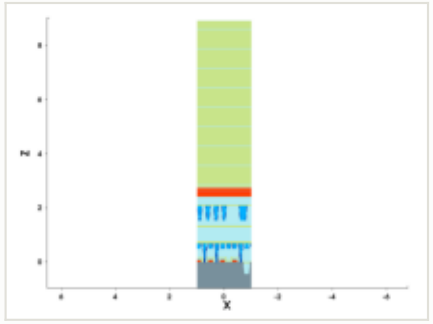

mask for this step

no mask for this step


steps by process area

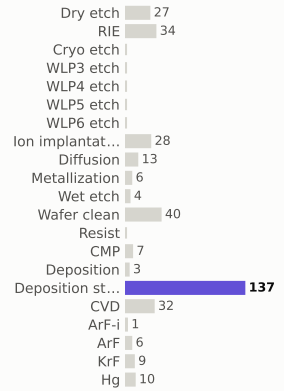

materials deposited (g)



gases emitted (g)

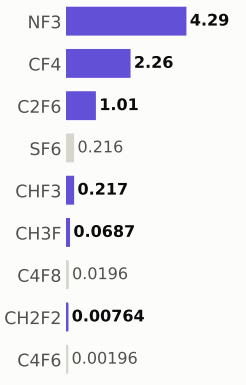


Step #5060: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	360.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

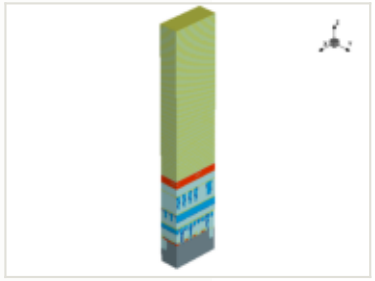


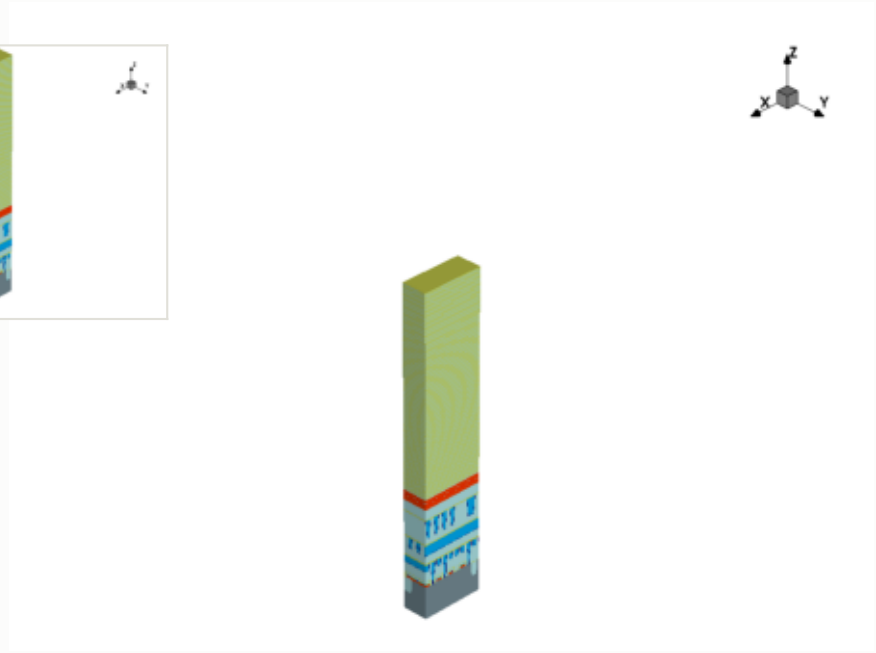

x cut at 0.000 µm

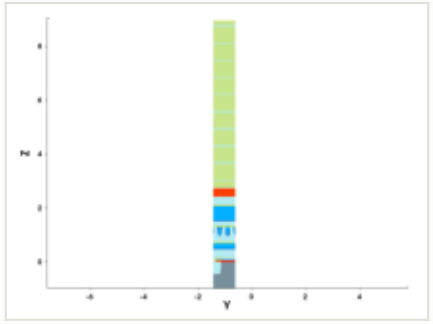

y cut at -1.035 µm

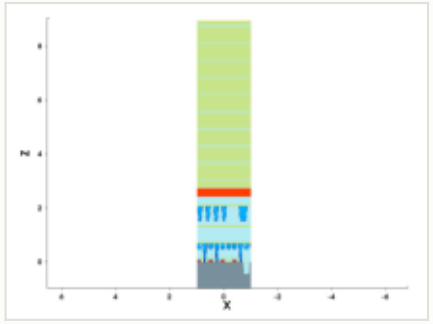


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

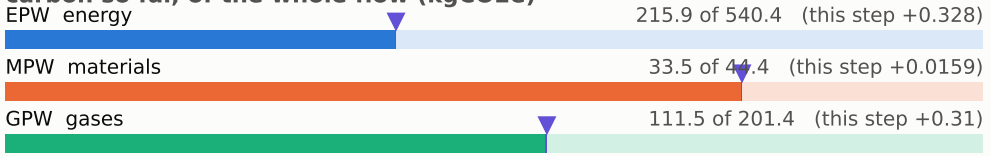

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

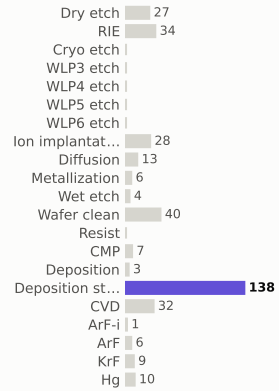

materials deposited (g)



gases emitted (g)

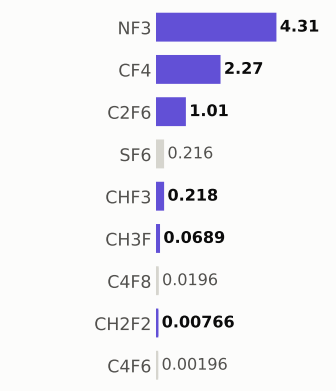


Step #5070: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	361.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

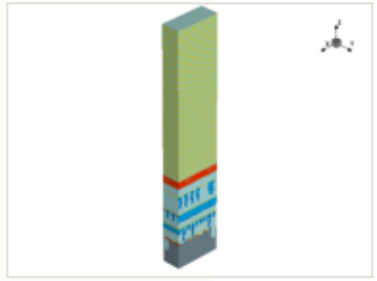


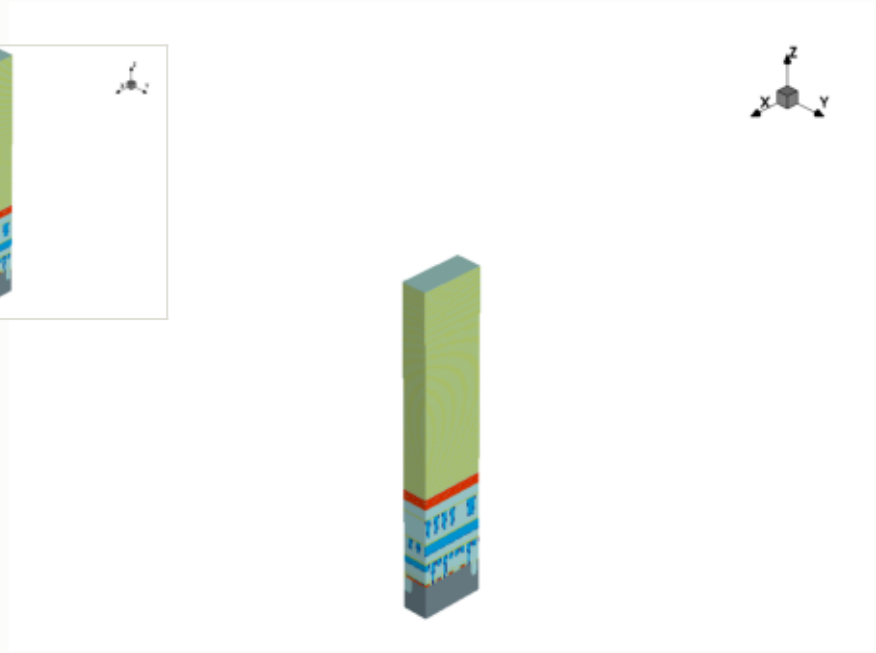

x cut at 0.000 µm

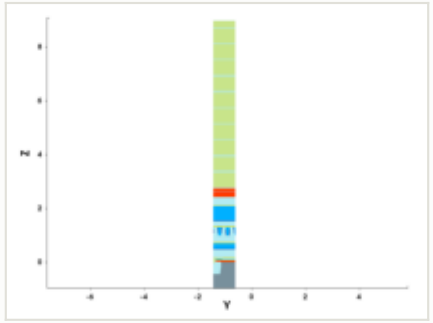

y cut at -1.035 µm

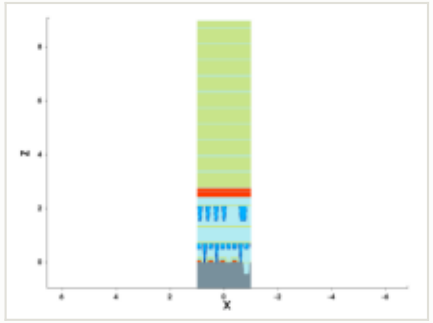


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

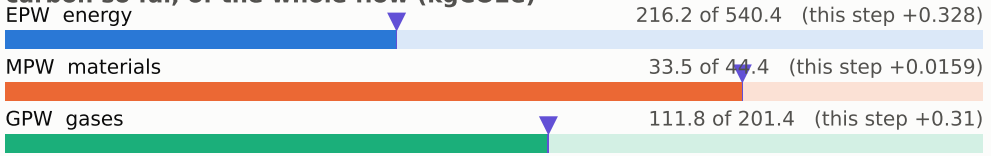


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

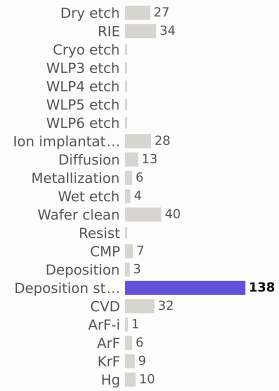

materials deposited (g)

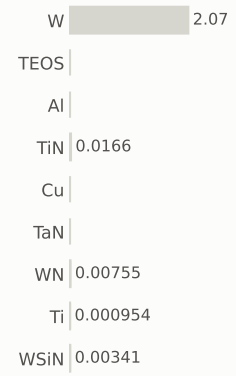

gases emitted (g)

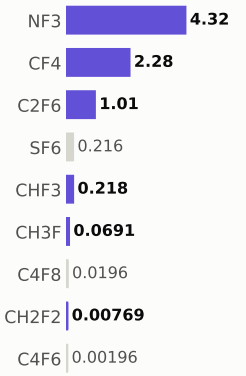


Step #5080: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	362.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

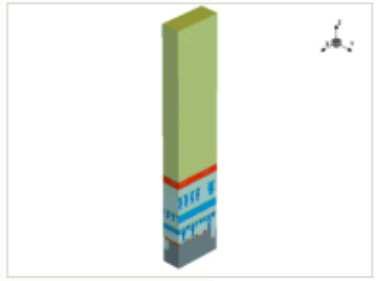


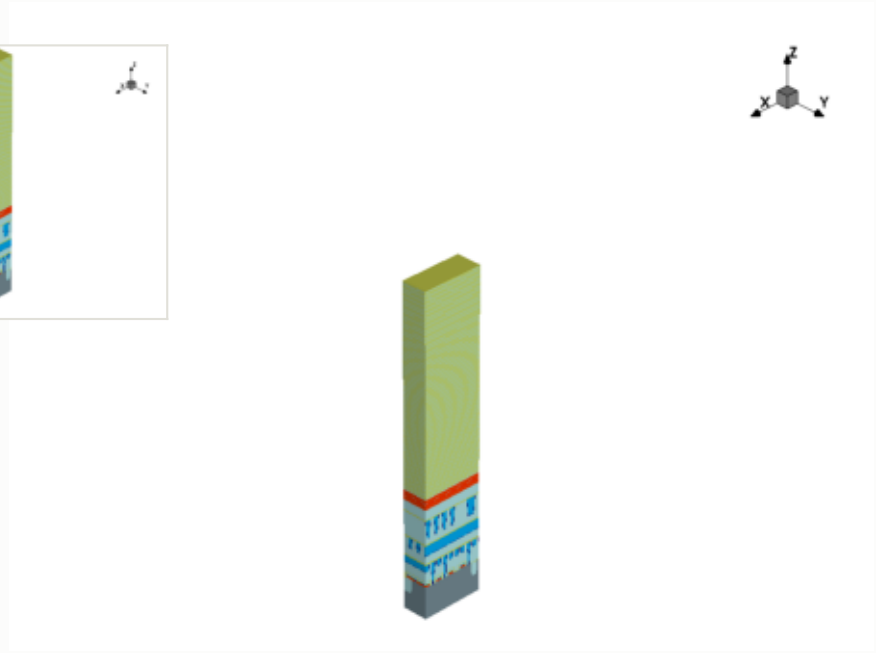

x cut at 0.000 µm

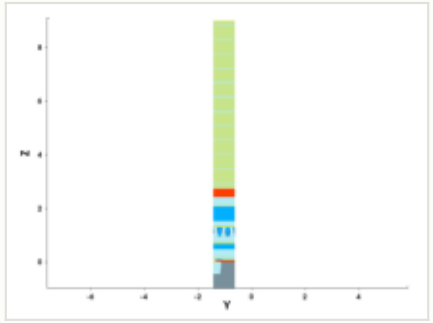

y cut at -1.035 µm

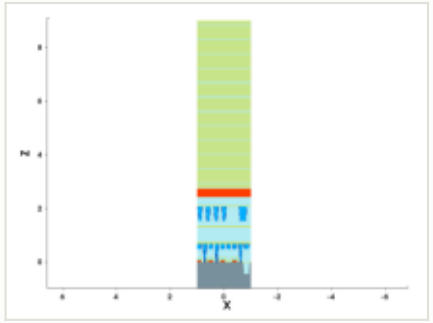


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

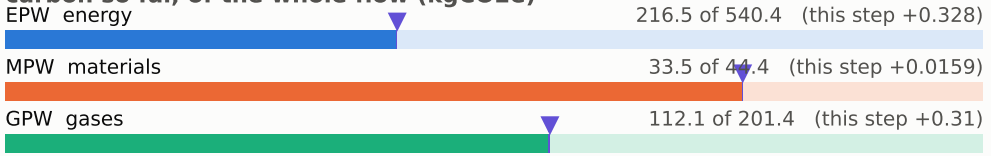


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

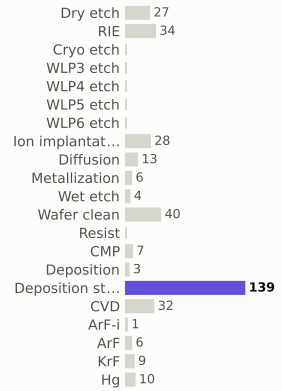

materials deposited (g)

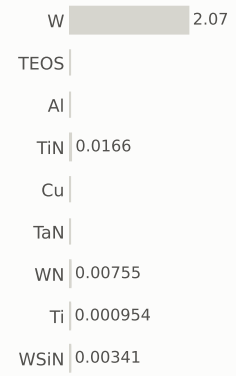

gases emitted (g)

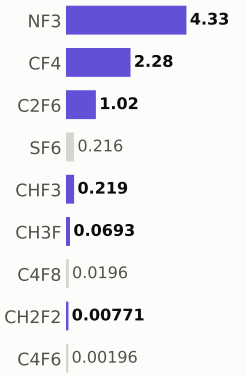


Step #5090: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	362.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

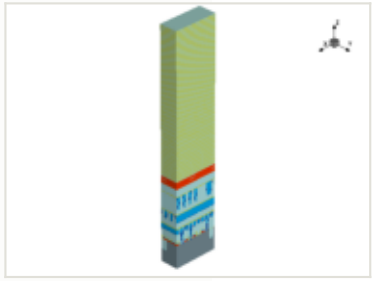


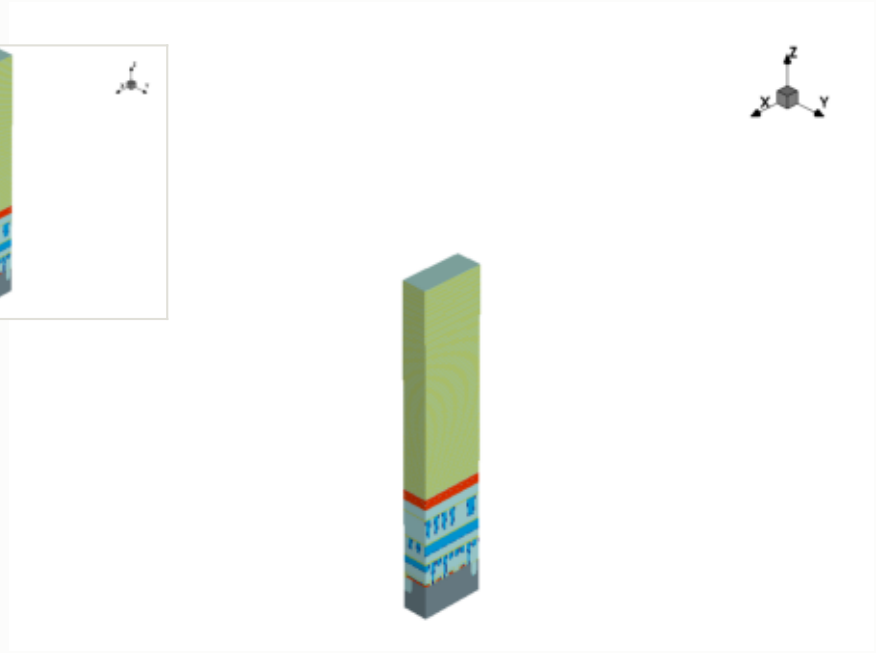


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

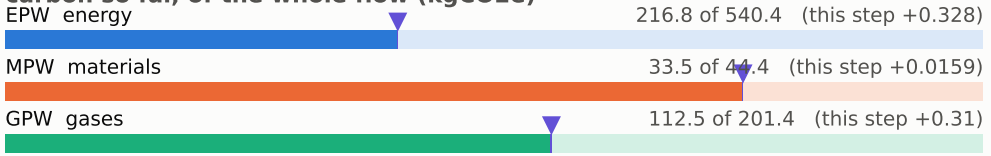


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

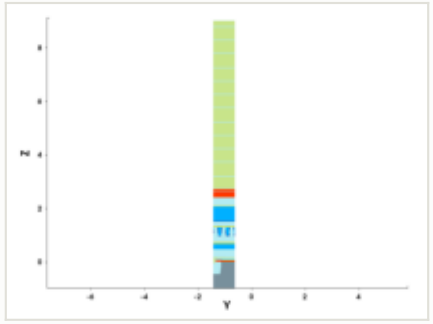


y cut at -1.035 µm

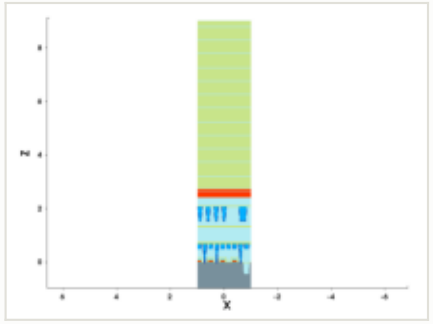

mask for this step

no mask for this step


steps by process area

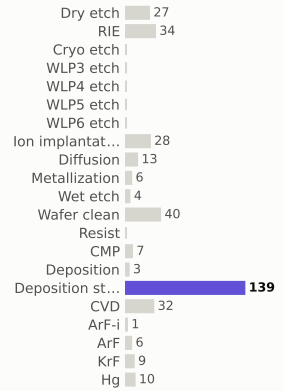

materials deposited (g)



gases emitted (g)

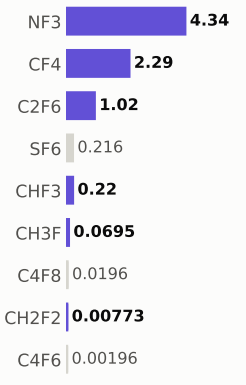


Step #5100: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	363.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

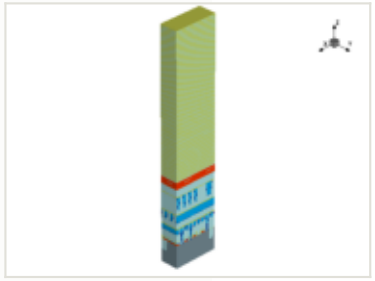


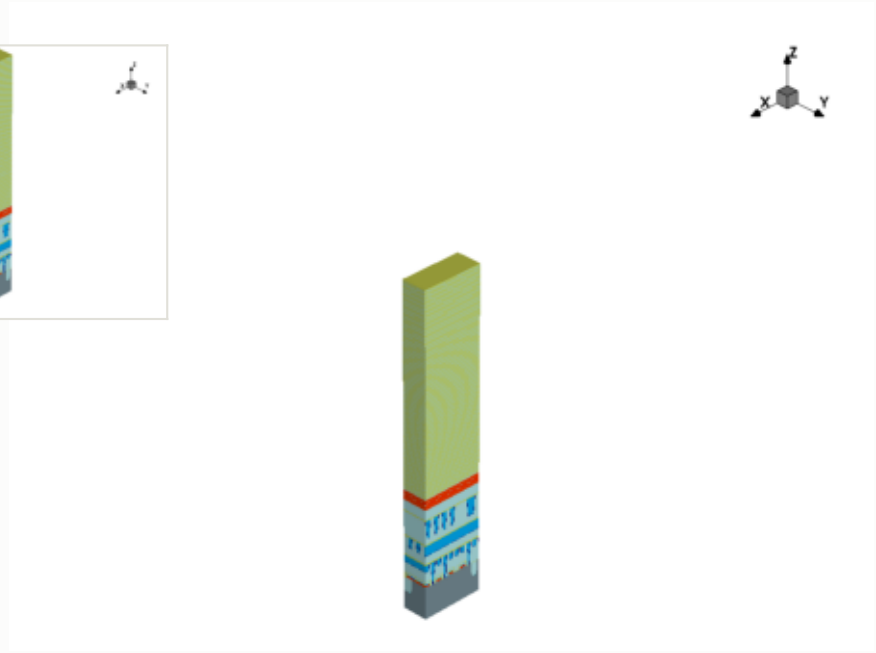


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

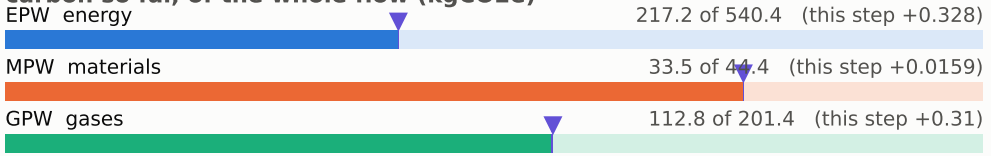


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

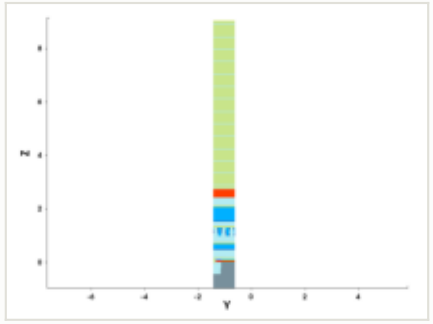


y cut at -1.035 µm

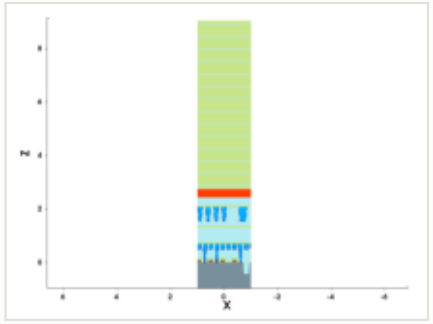


mask for this step

no mask for this step


steps by process area

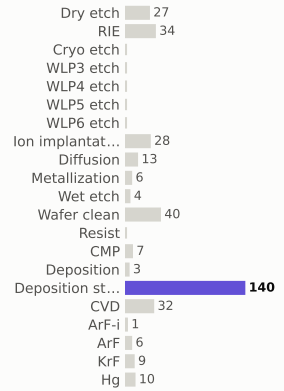

materials deposited (g)

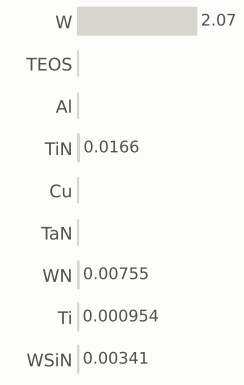

gases emitted (g)

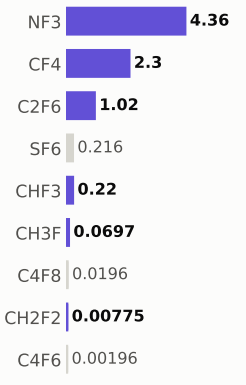


Step #5110: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	364.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

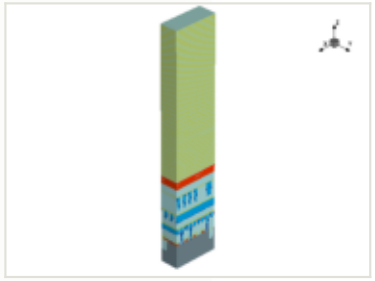


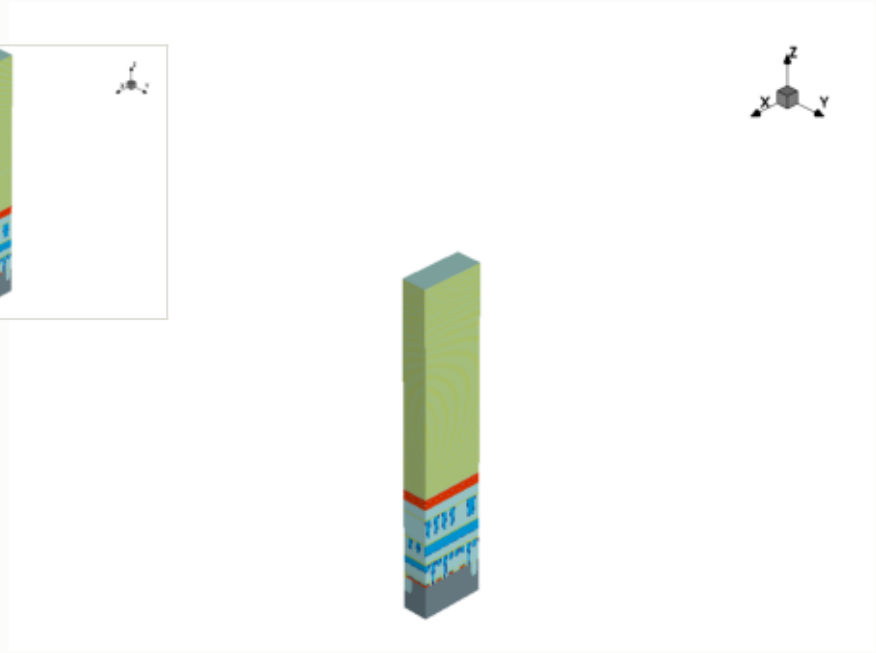


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

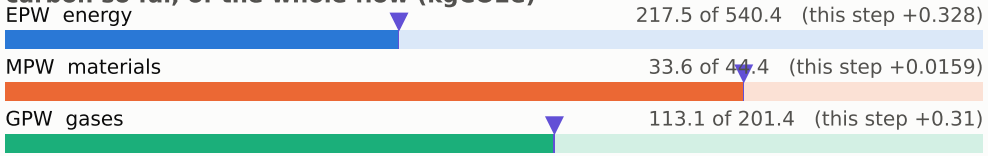


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

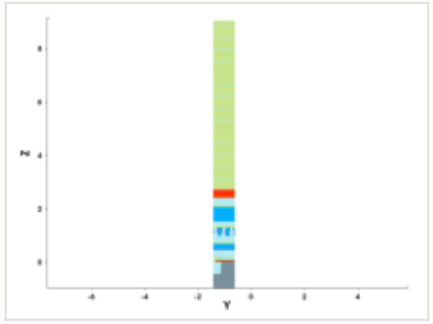


y cut at -1.035 µm

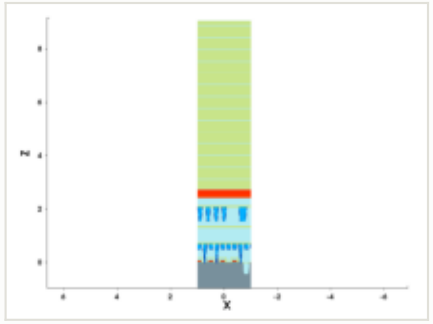

mask for this step

no mask for this step


steps by process area

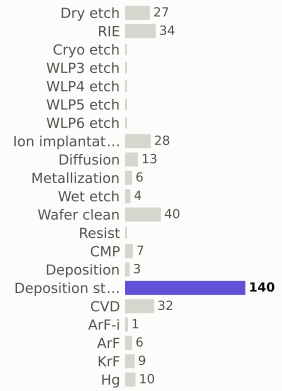

materials deposited (g)



gases emitted (g)




Step #5120: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	364.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

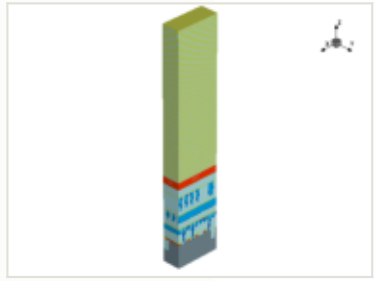


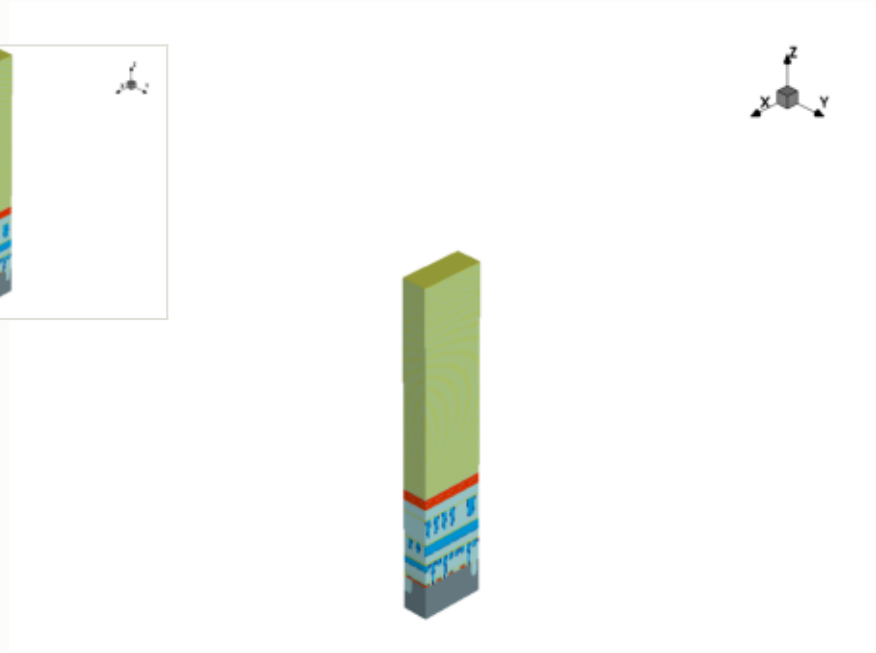


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

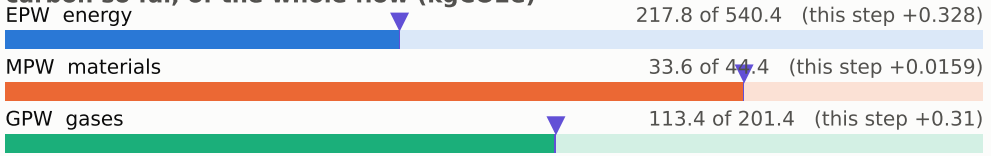


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

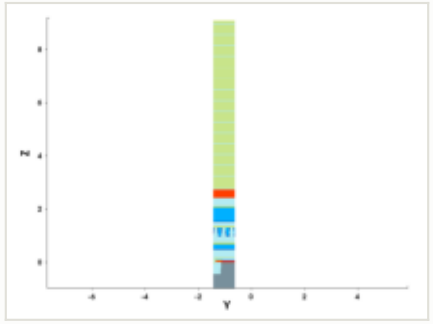


y cut at -1.035 µm

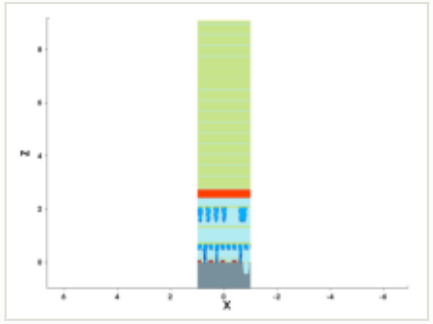

mask for this step

no mask for this step


steps by process area

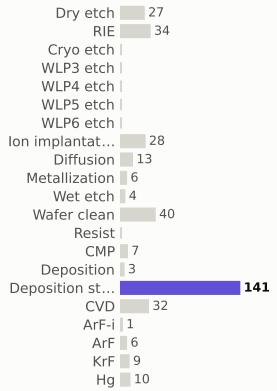

materials deposited (g)



gases emitted (g)




Step #5130: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	365.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

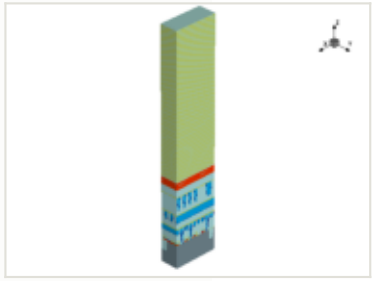


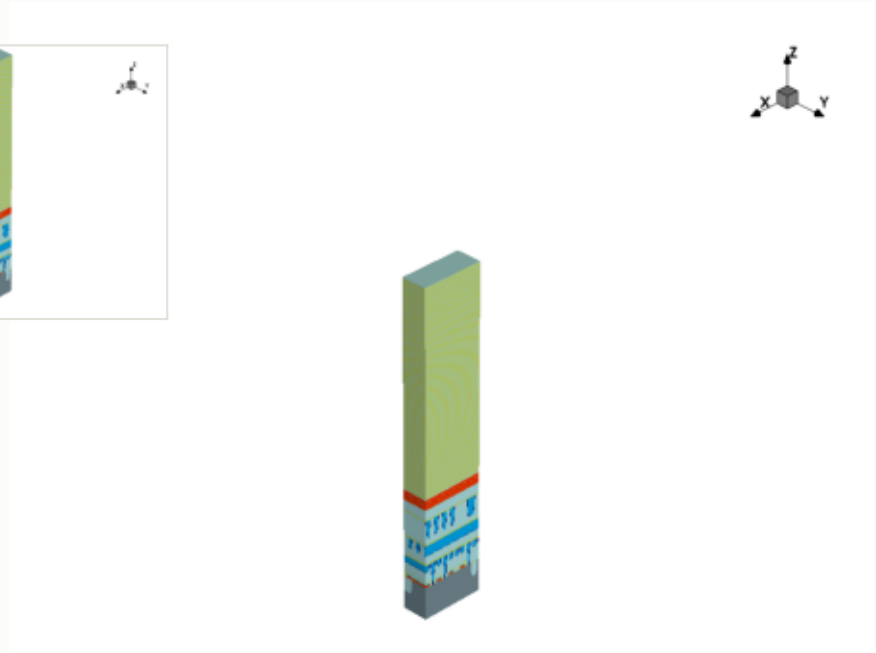


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

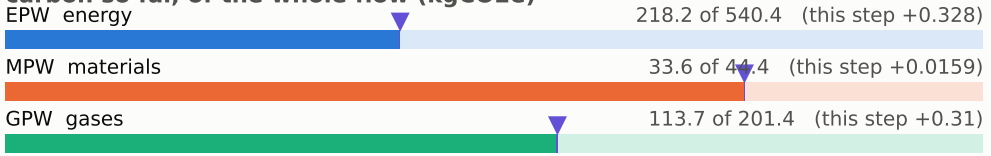


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

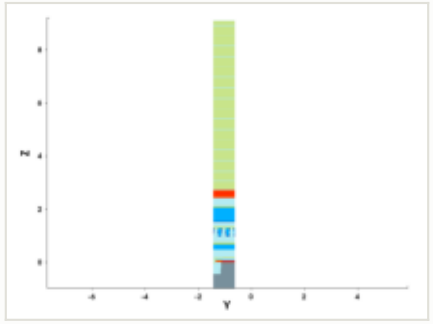


y cut at -1.035 µm

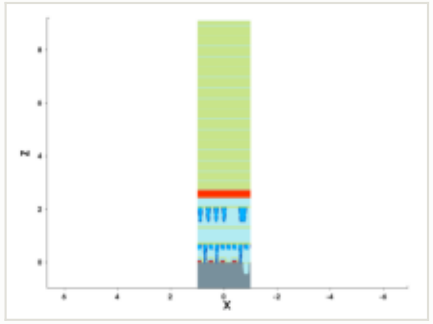

mask for this step

no mask for this step


steps by process area

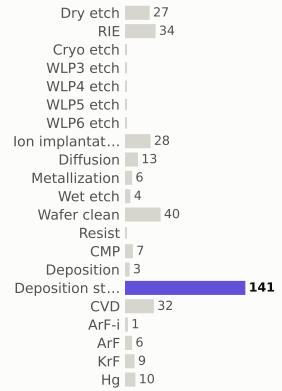

materials deposited (g)



gases emitted (g)




Step #5140: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	366.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

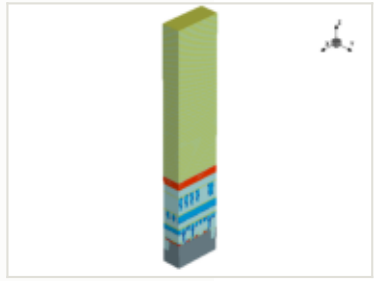


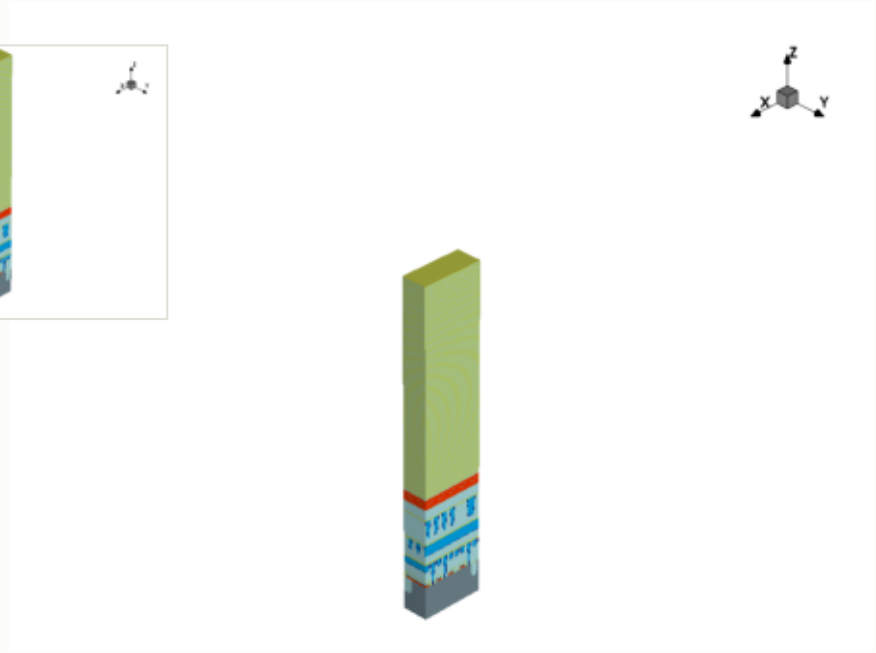


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

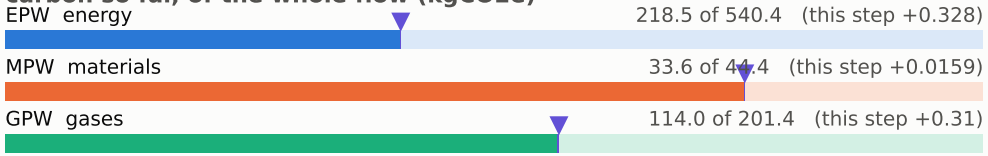


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

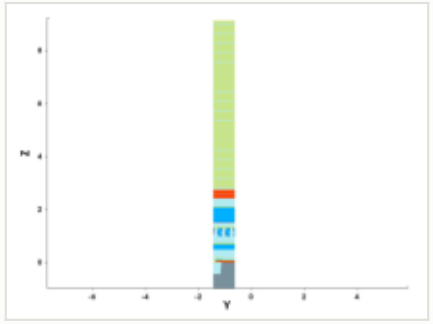


y cut at -1.035 µm

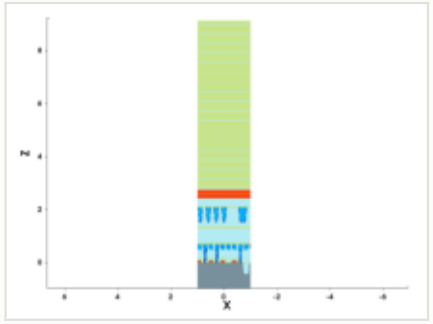

mask for this step

no mask for this step


steps by process area

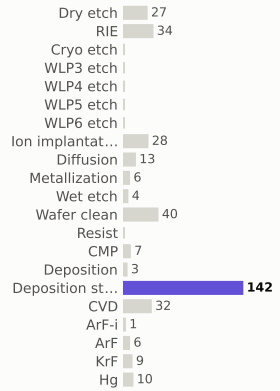

materials deposited (g)



gases emitted (g)




Step #5150: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	366.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

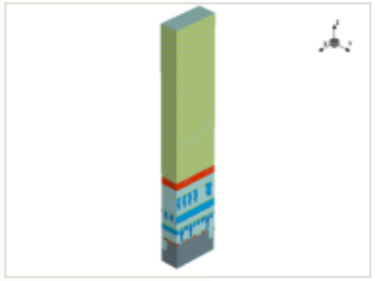


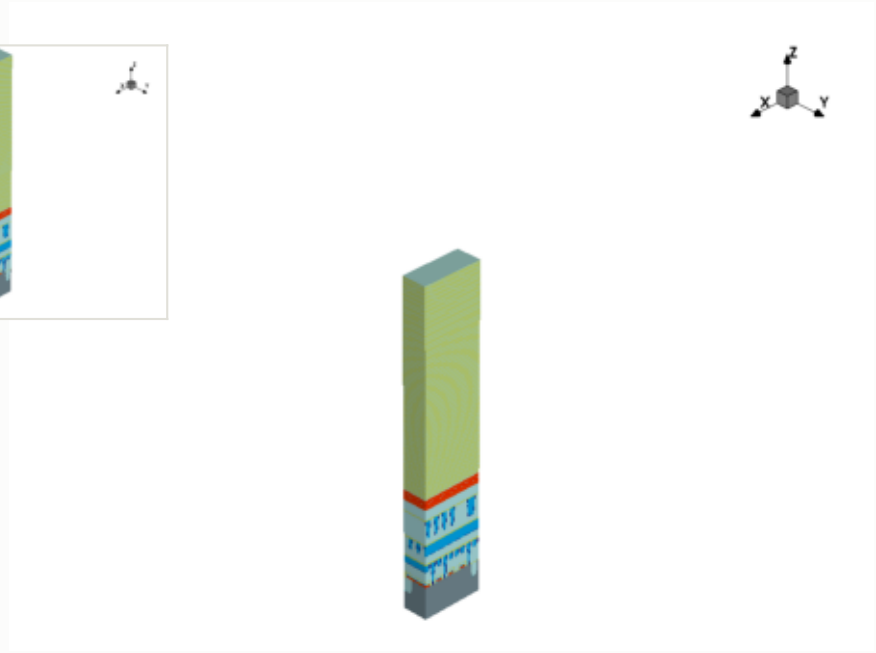

x cut at 0.000 µm

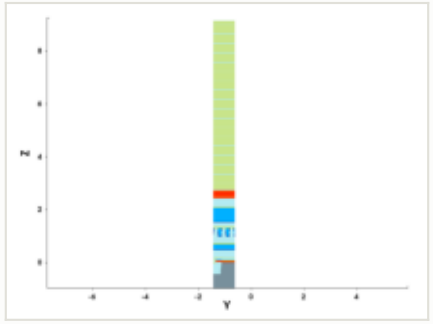

y cut at -1.035 µm

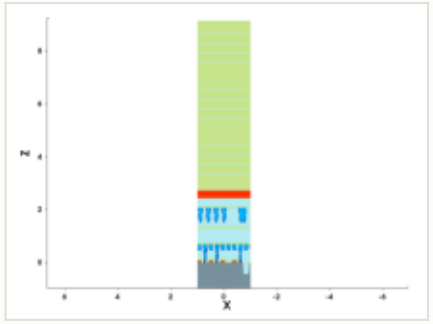


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

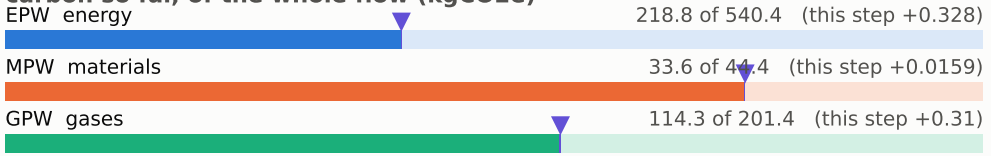

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

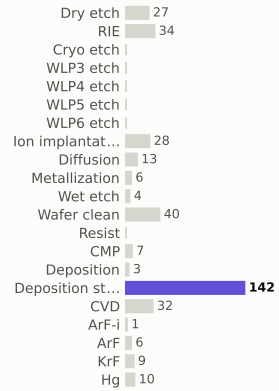

materials deposited (g)



gases emitted (g)

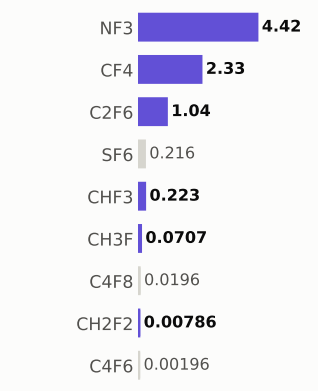


Step #5160: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	367.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

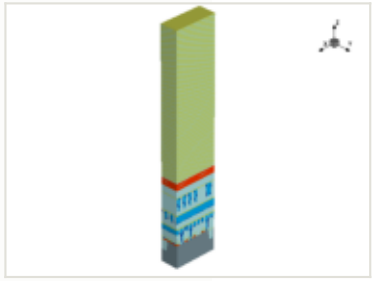


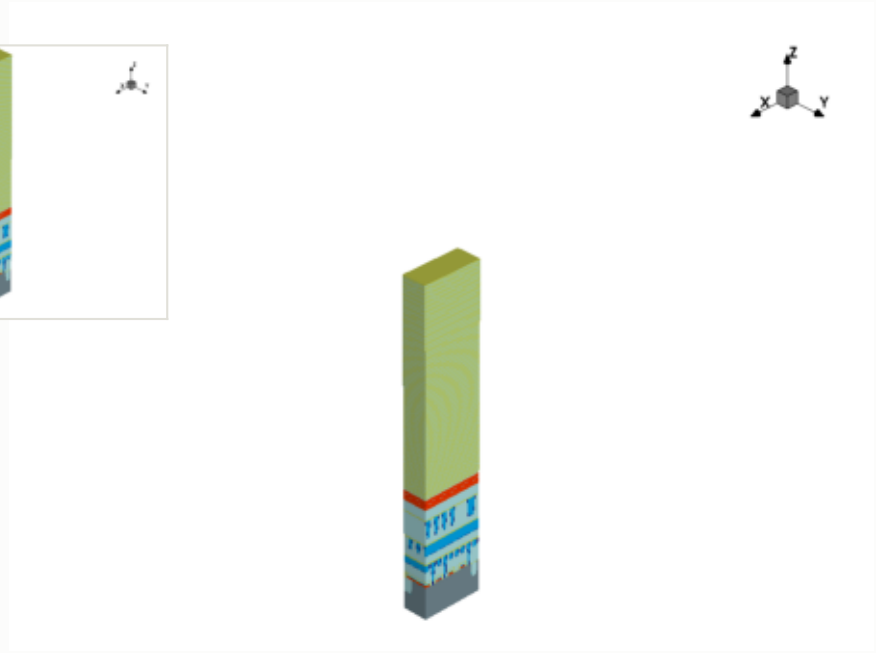

x cut at 0.000 µm

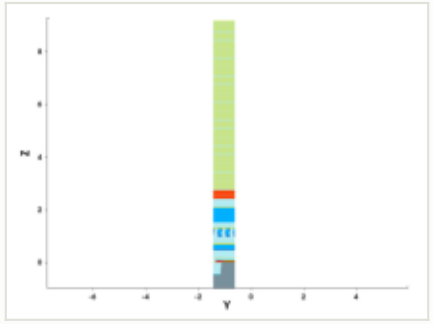

y cut at -1.035 µm

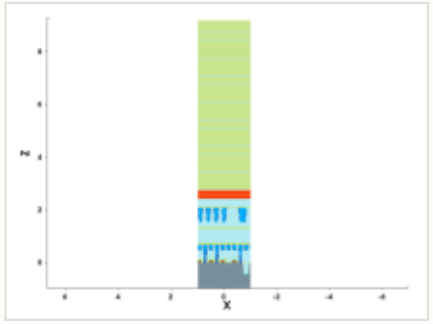


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

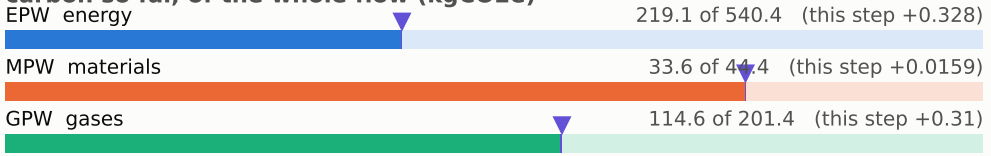

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

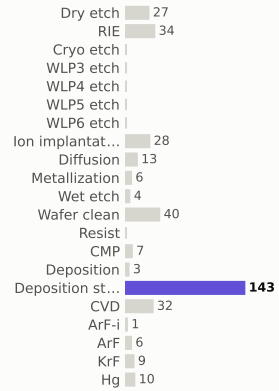

materials deposited (g)



gases emitted (g)

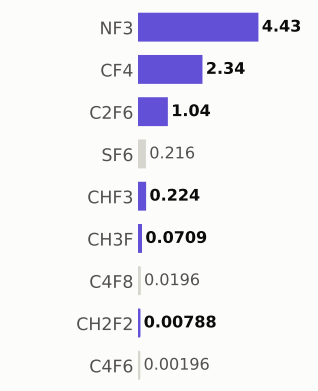


Step #5170: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	368.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

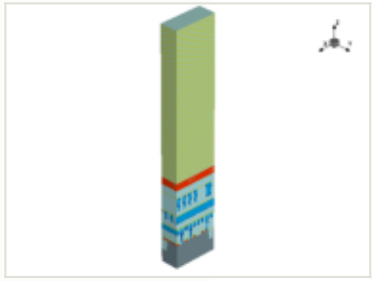


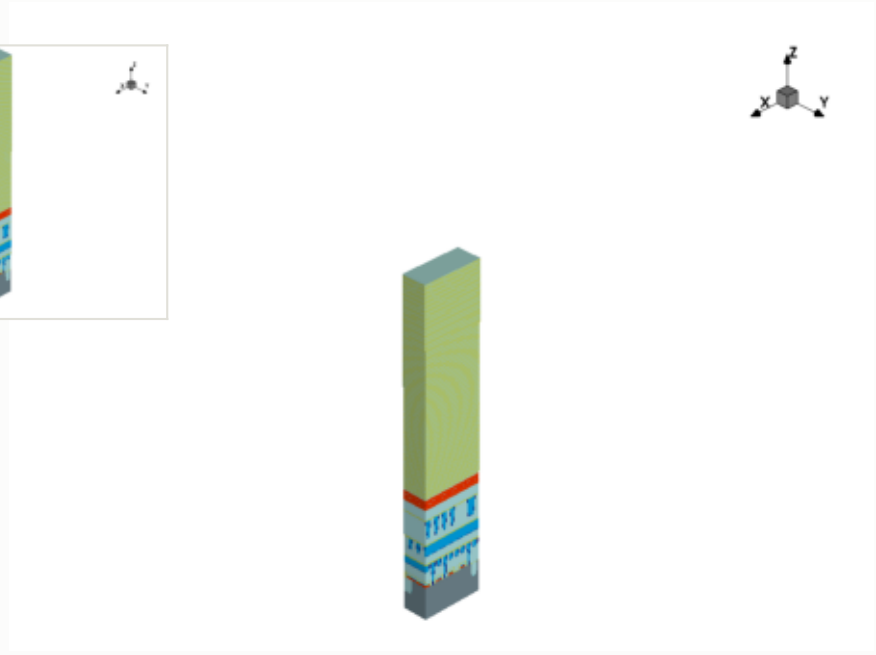

x cut at 0.000 µm

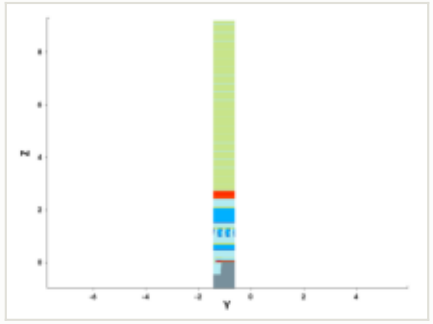

y cut at -1.035 µm

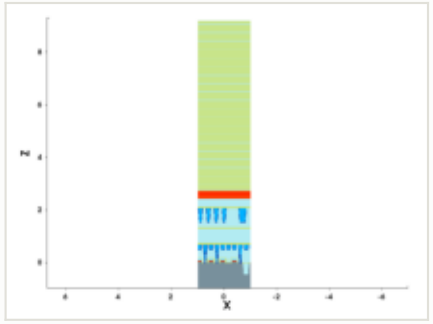


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

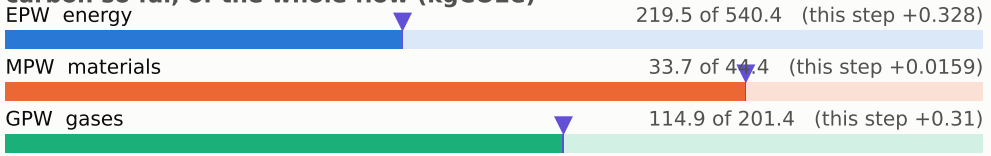

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

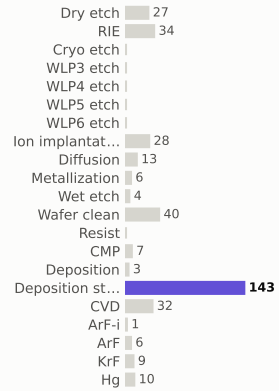

materials deposited (g)



gases emitted (g)

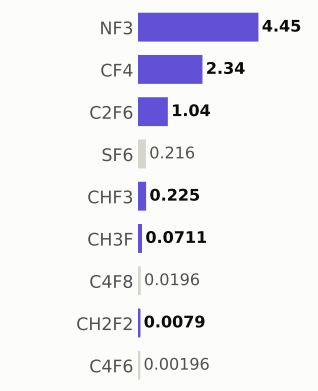


Step #5180: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	368.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

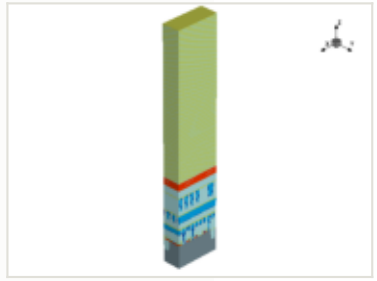


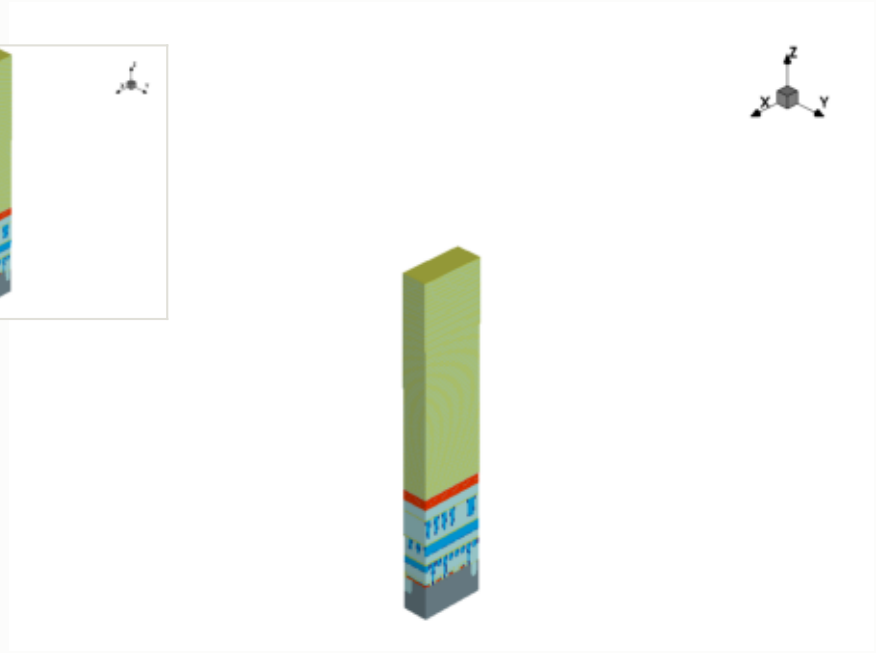

x cut at 0.000 µm

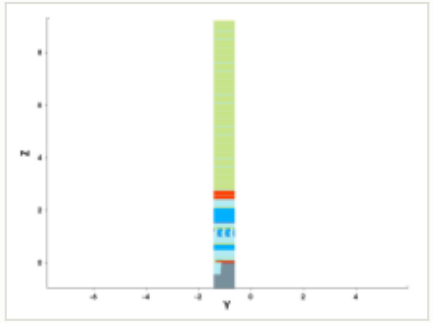

y cut at -1.035 µm

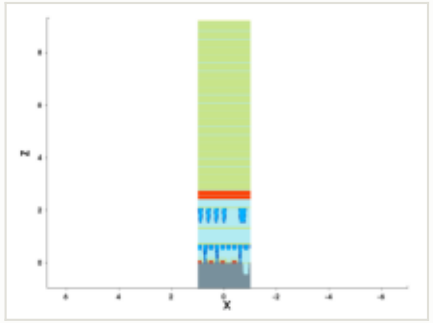


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

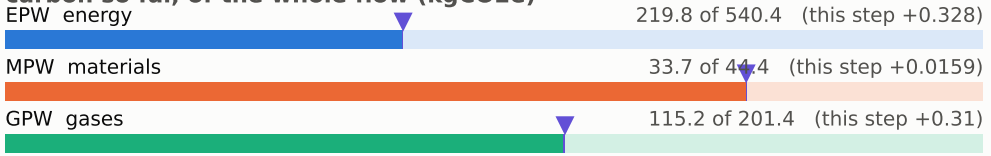


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

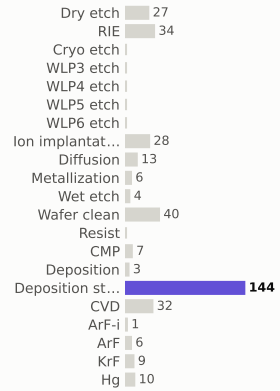

materials deposited (g)

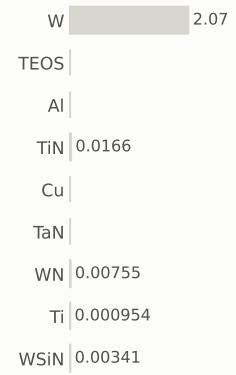

gases emitted (g)

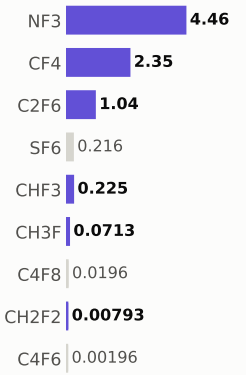


Step #5190: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	369.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

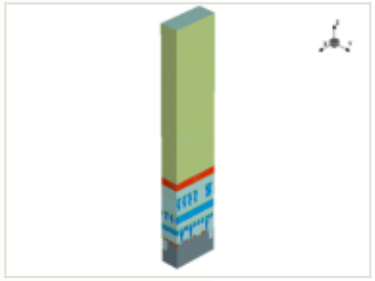


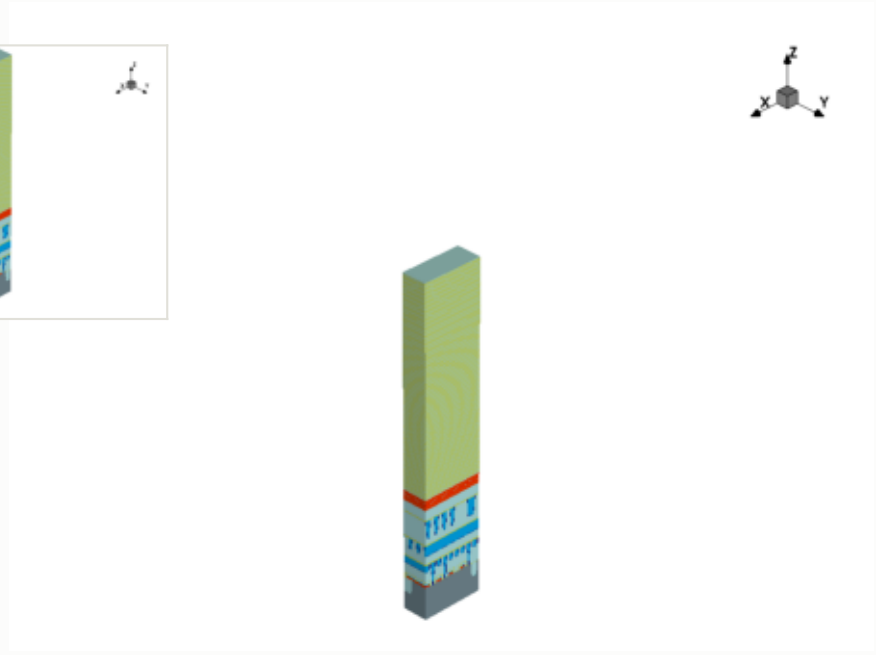

x cut at 0.000 µm

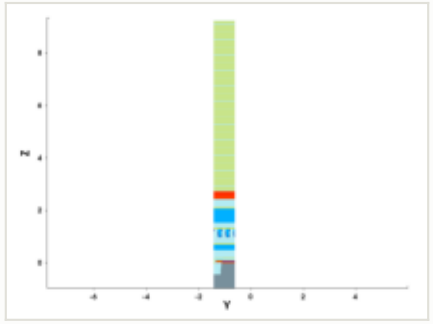

y cut at -1.035 µm

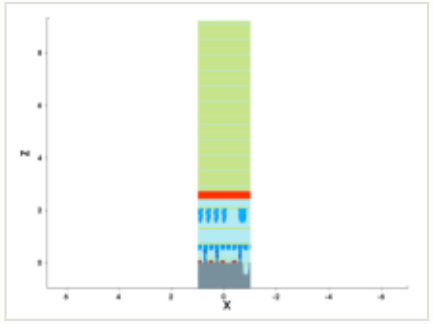


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

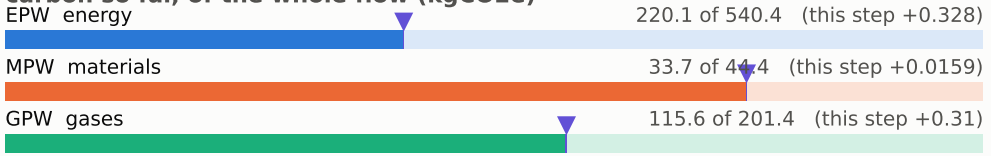

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

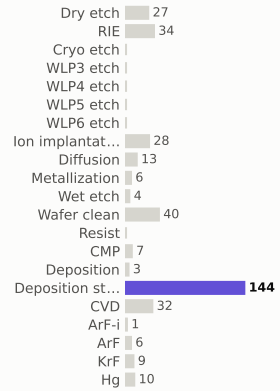

materials deposited (g)



gases emitted (g)

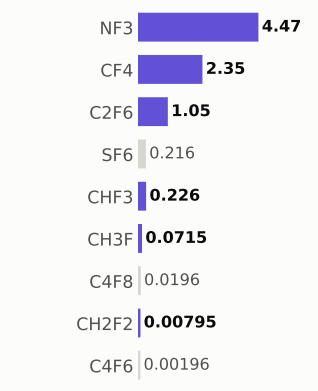


Step #5200: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	370.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

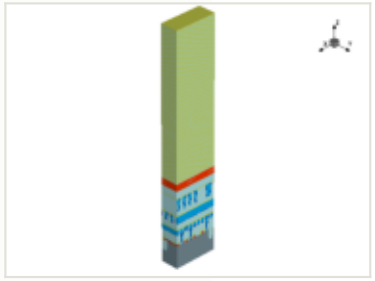


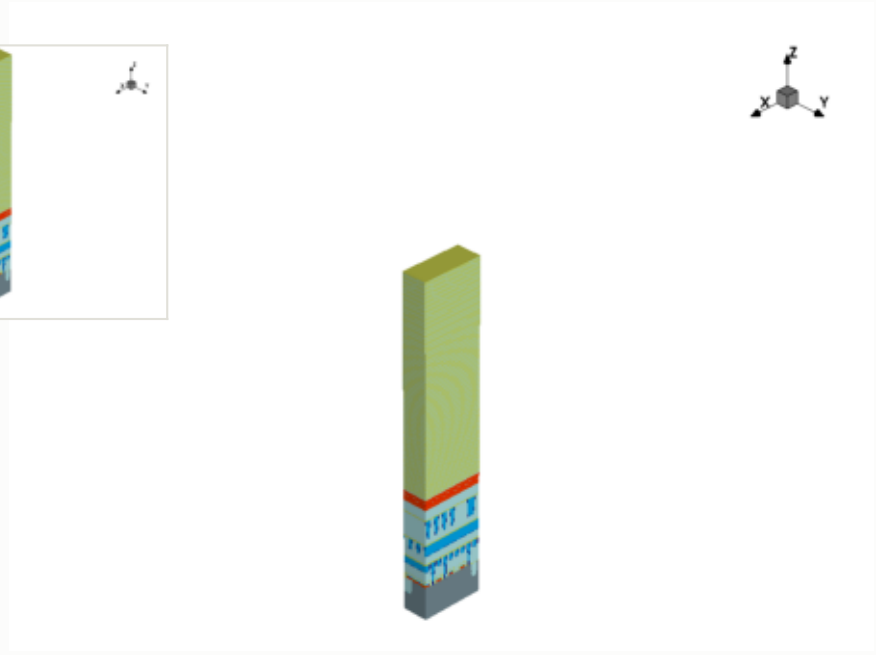

x cut at 0.000 µm

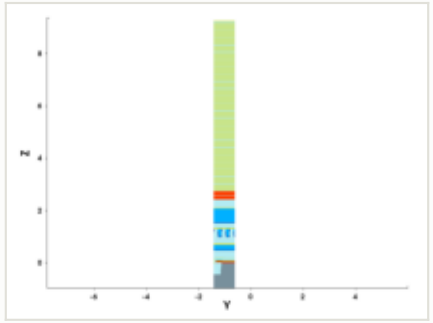

y cut at -1.035 µm

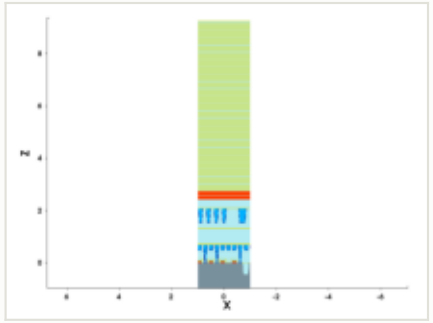


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

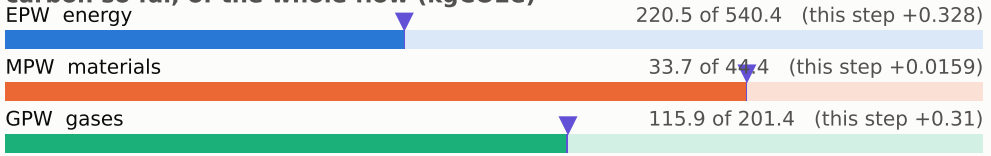


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

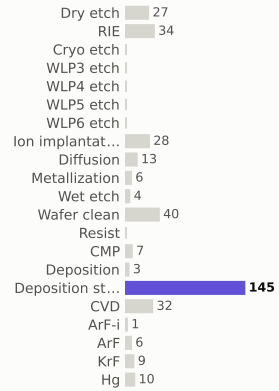

materials deposited (g)

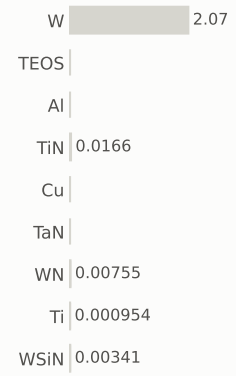

gases emitted (g)

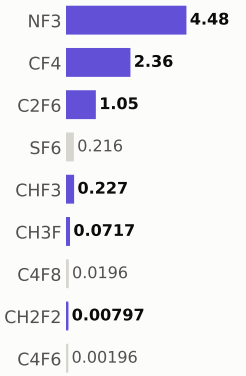


Step #5210: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	370.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

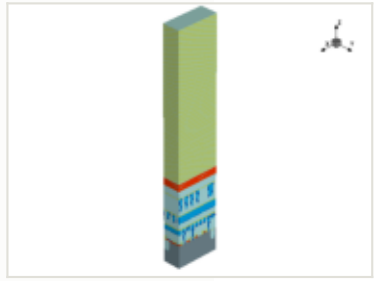


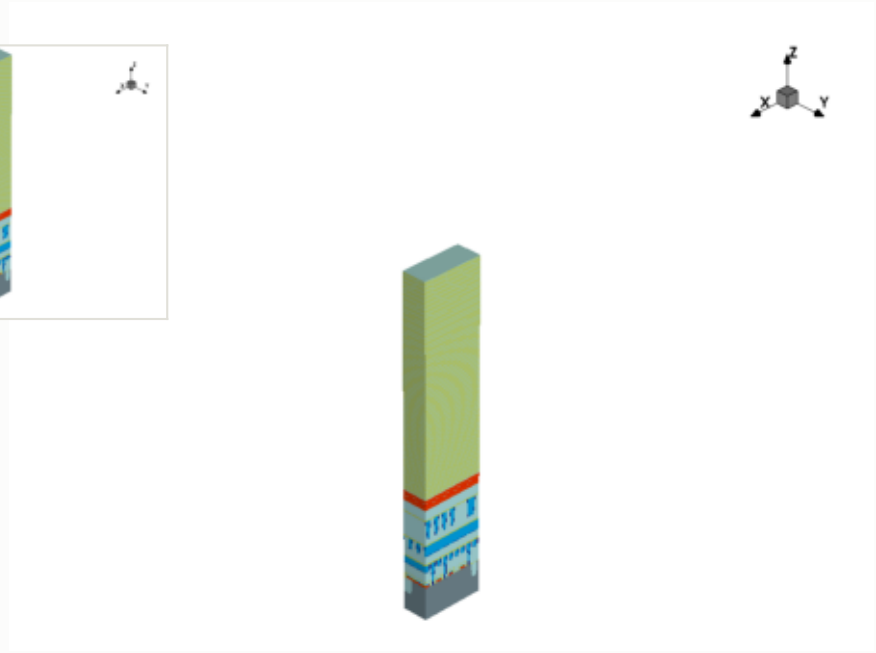

x cut at 0.000 µm

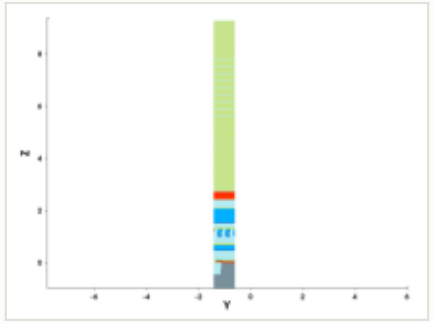

y cut at -1.035 µm

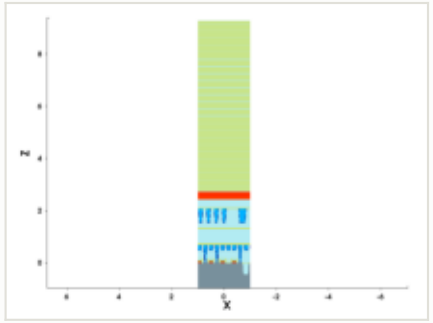


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

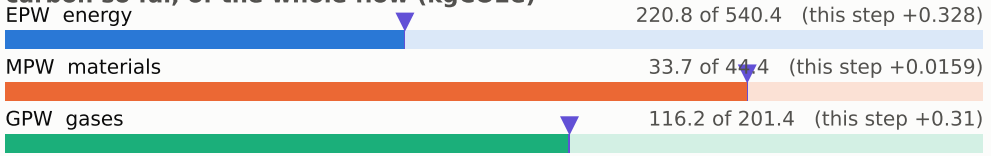


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

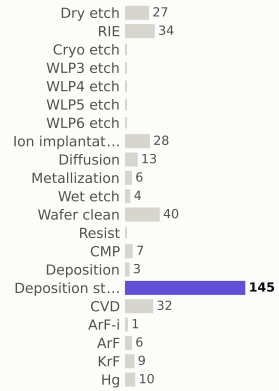

materials deposited (g)

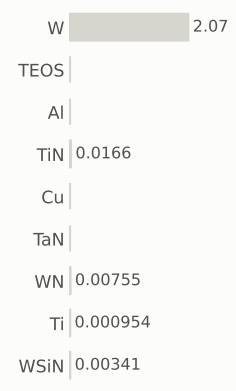

gases emitted (g)



Step #5220: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	371.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




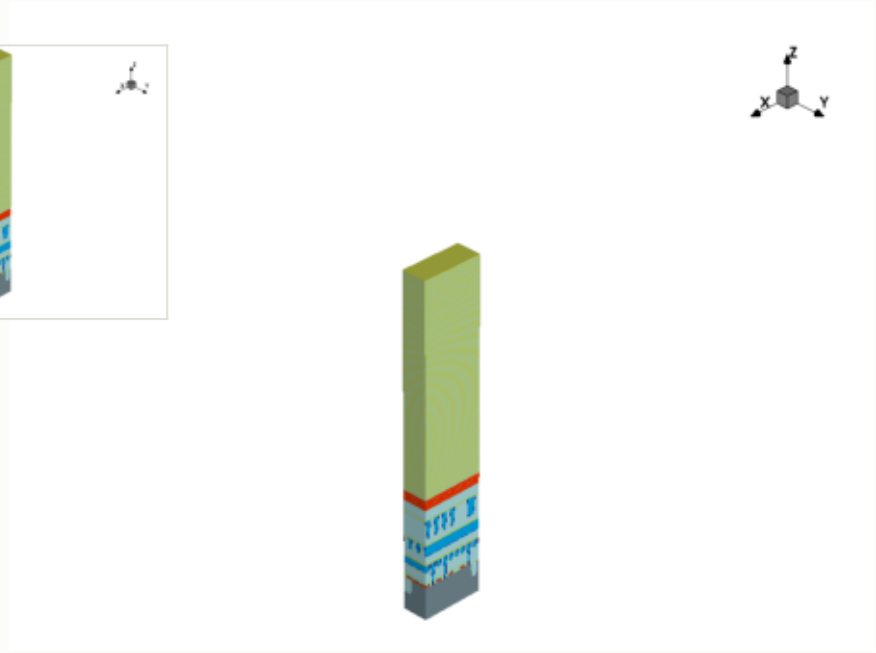

x cut at 0.000 µm

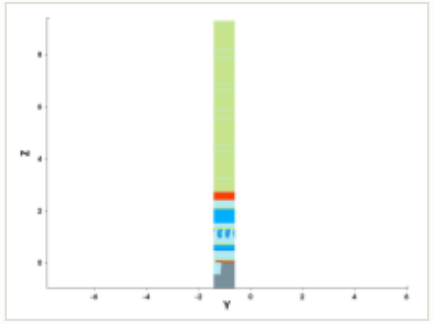

y cut at -1.035 µm

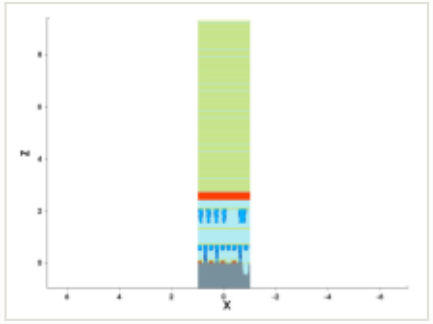


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

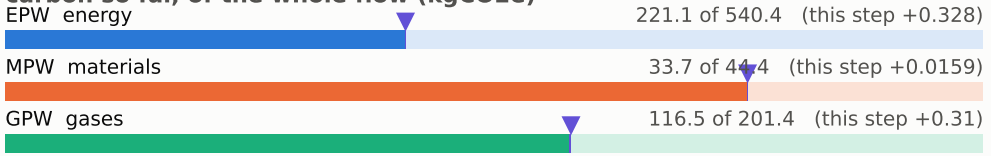


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

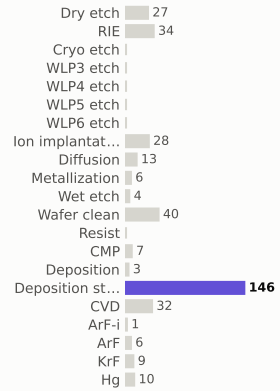

materials deposited (g)

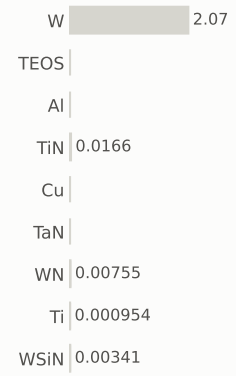

gases emitted (g)

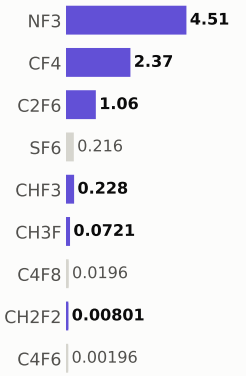

Step #5230: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	372.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




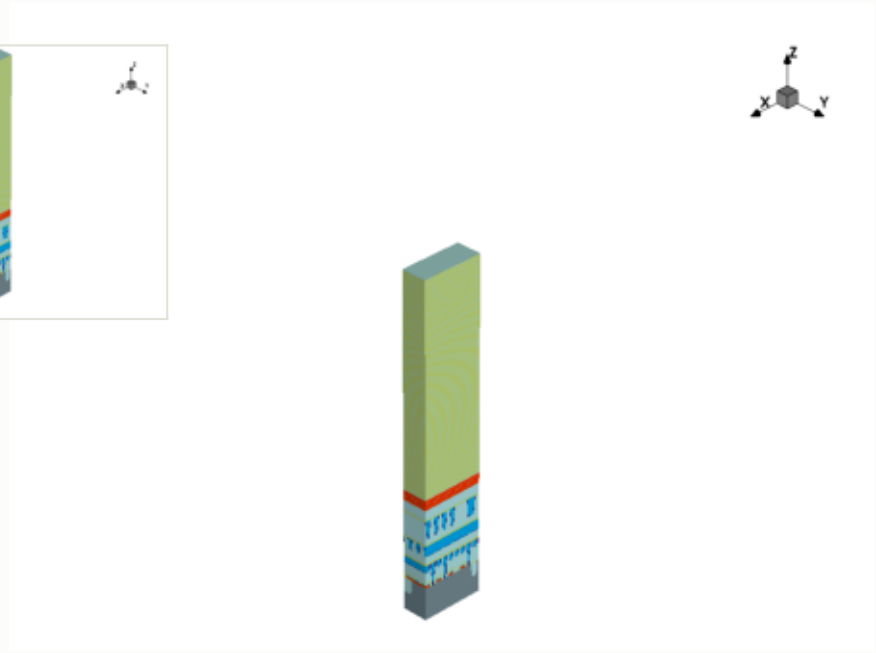

x cut at 0.000 µm

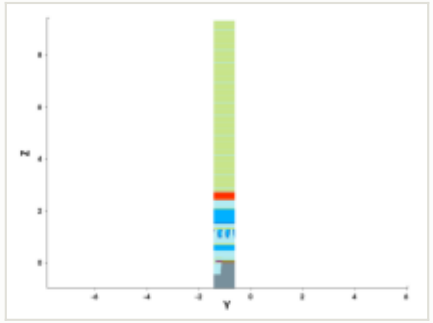

y cut at -1.035 µm

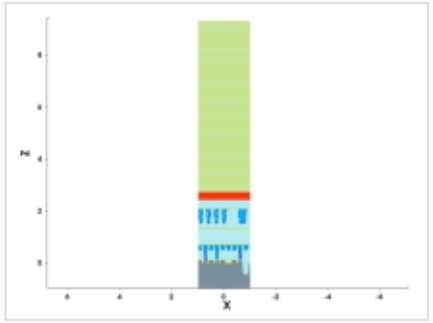

mask for this step


no mask for this step

this step


process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

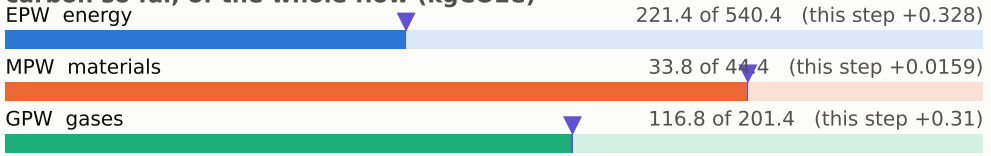


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

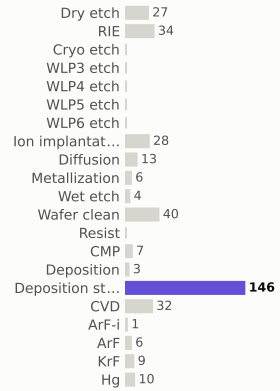

materials deposited (g)

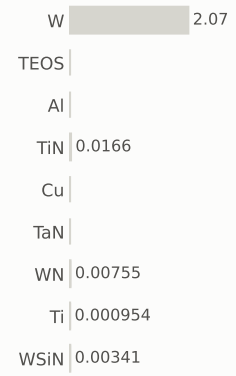

gases emitted (g)

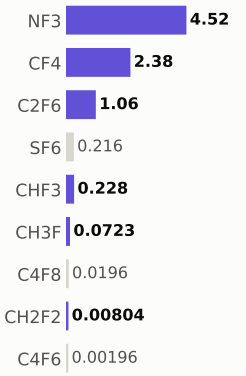


Step #5240: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	372.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

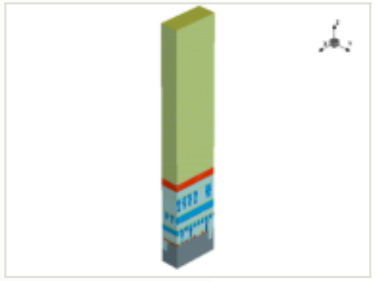


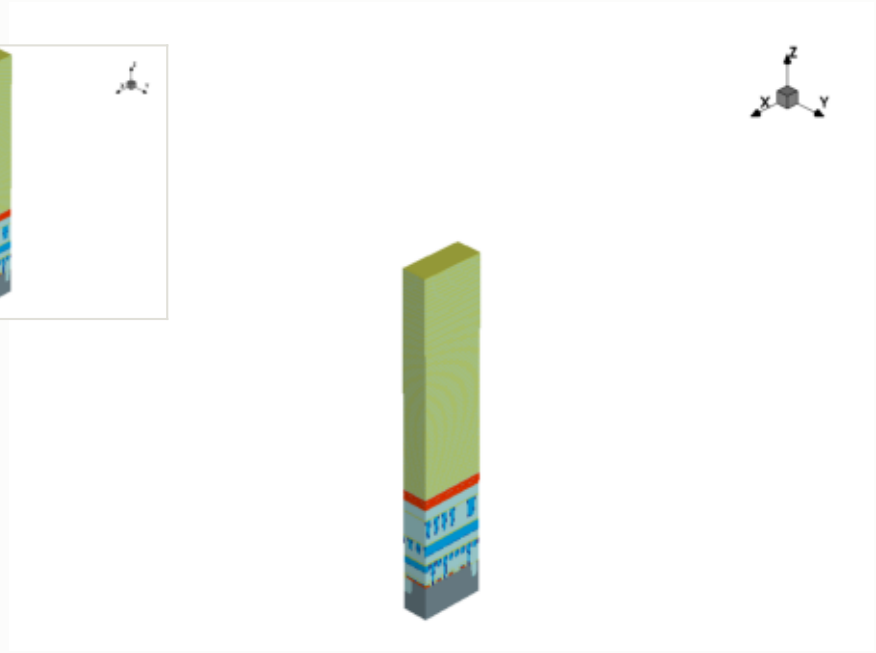

x cut at 0.000 µm

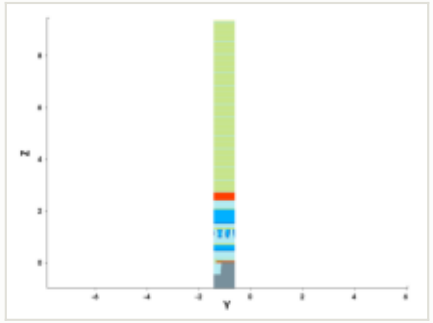

y cut at -1.035 µm

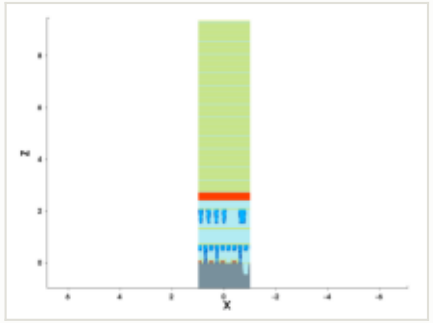


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

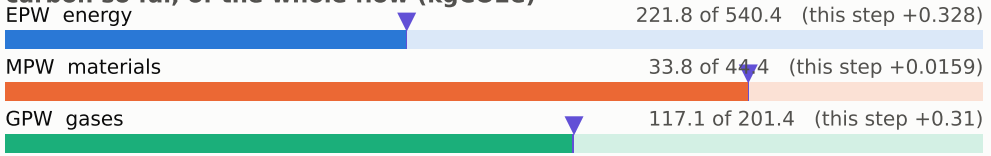


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

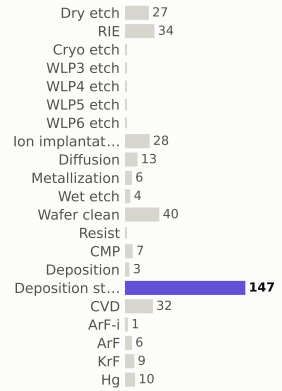

materials deposited (g)

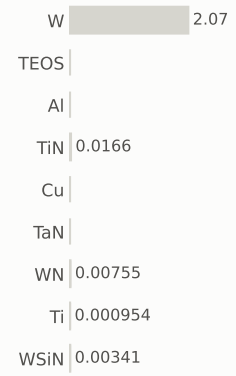

gases emitted (g)

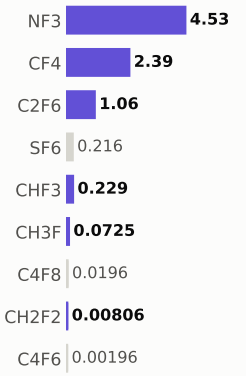


Step #5250: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	373.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

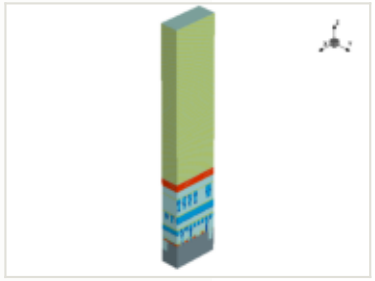


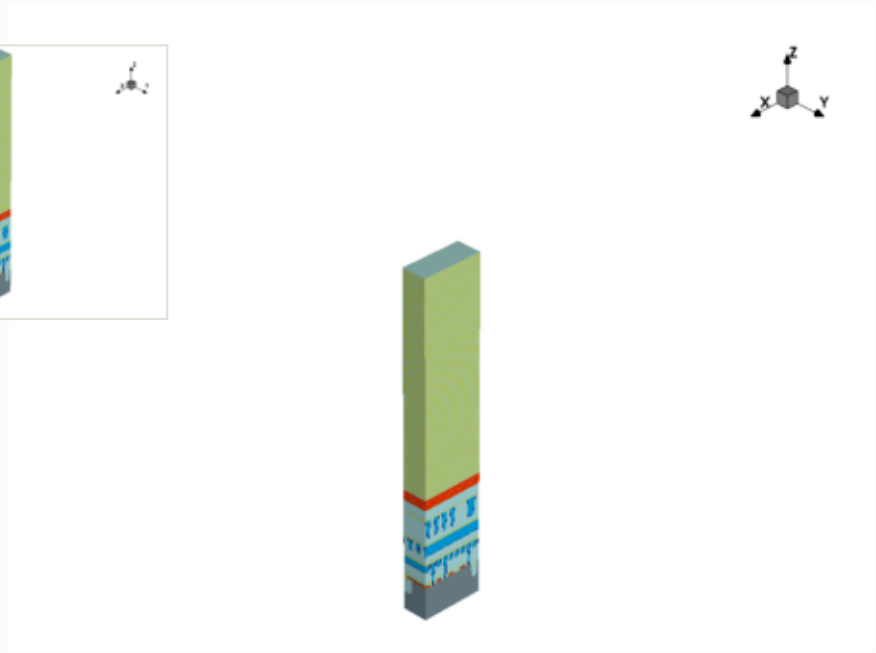


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

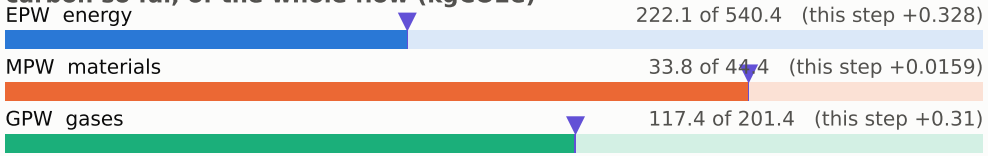


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

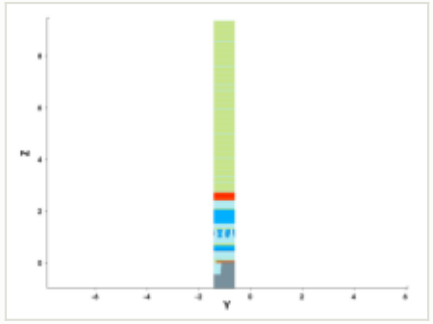


y cut at -1.035 µm

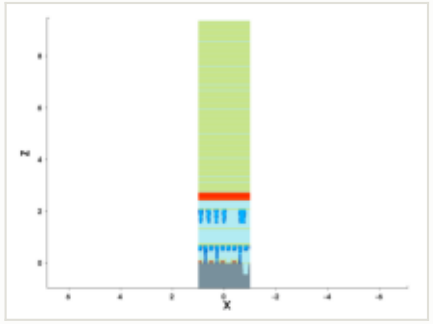


mask for this step

no mask for this step


steps by process area

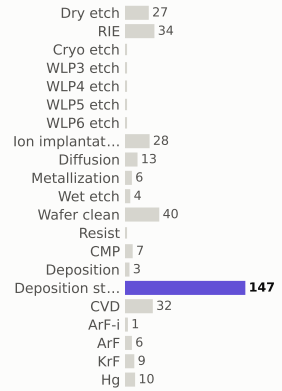

materials deposited (g)

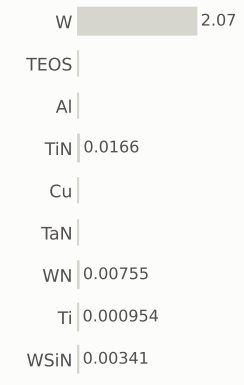

gases emitted (g)




Step #5260: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	374.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

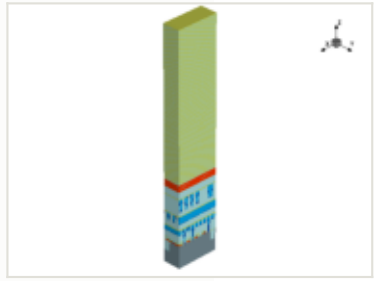

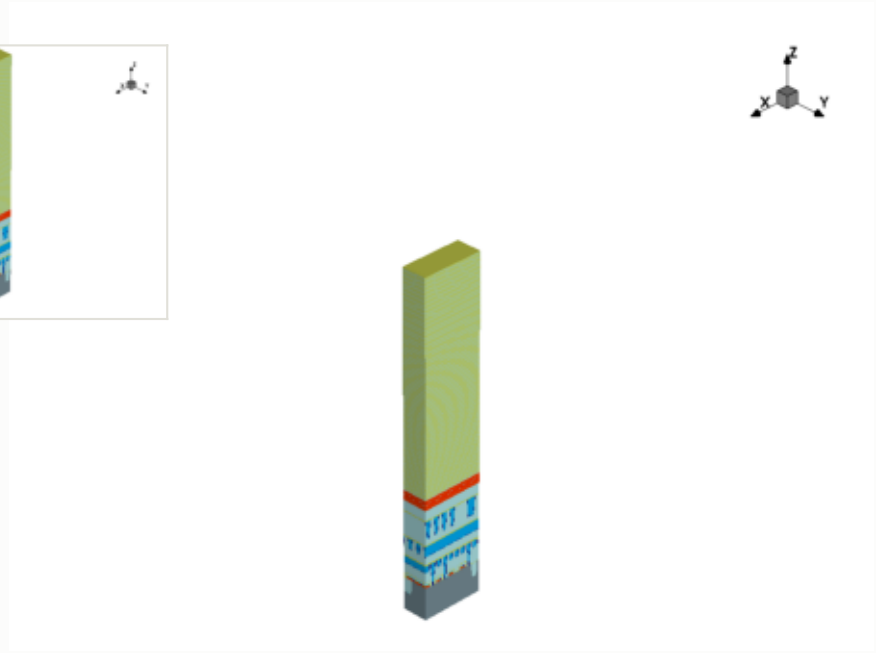


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)




embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

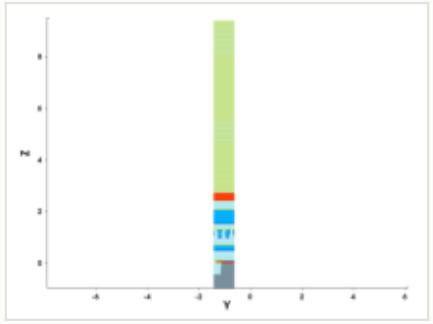


y cut at -1.035 µm

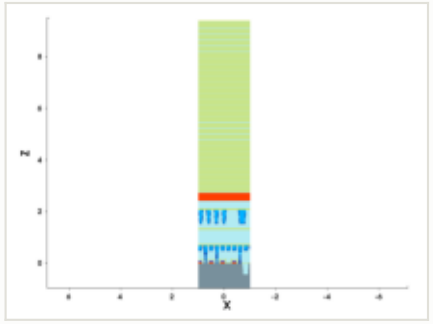

mask for this step

no mask for this step


steps by process area

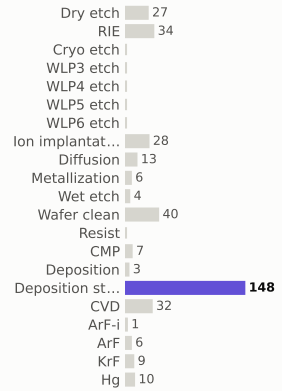

materials deposited (g)



gases emitted (g)




Step #5270: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	374.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

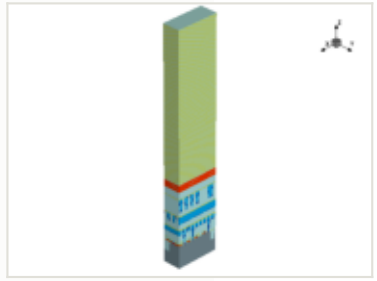


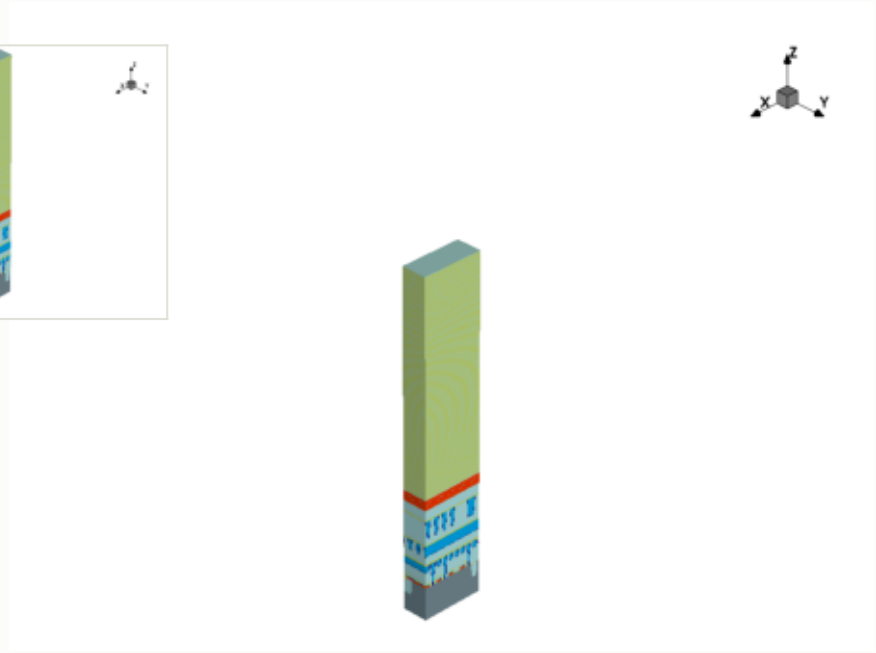

x cut at 0.000 µm

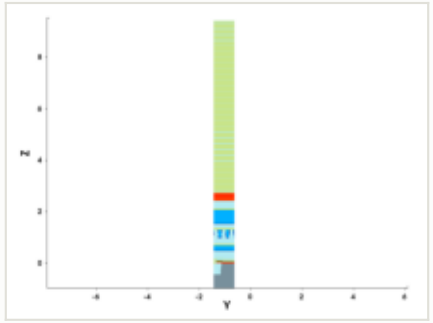

y cut at -1.035 µm

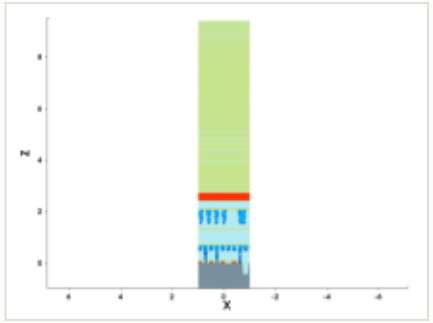

mask for this step


no mask for this step

this step


process area	Deposition_stack
material	—
thickness	0.017 µm
material GWP	—
input gases	NF3 1.27 g
energy	0.545 kWh + 0.218 overhead

EPW	0.328 kgCO2e
EPW tool	0.234 kgCO2e
EPW overhead	0.0937 kgCO2e
MPW	0.0159 kgCO2e (gas 0.0159)
GPW	0.31 kgCO2e
embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

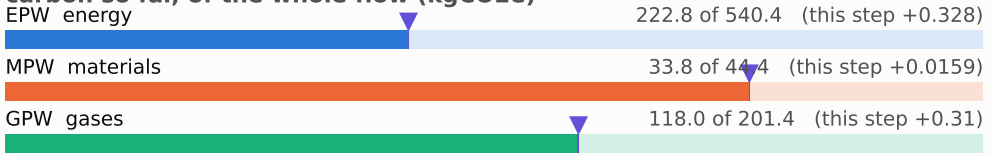

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

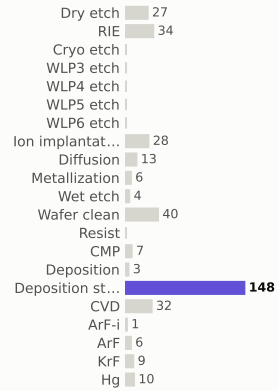

materials deposited (g)



gases emitted (g)

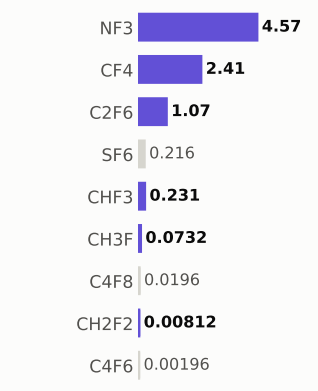

Step #5280: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	375.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




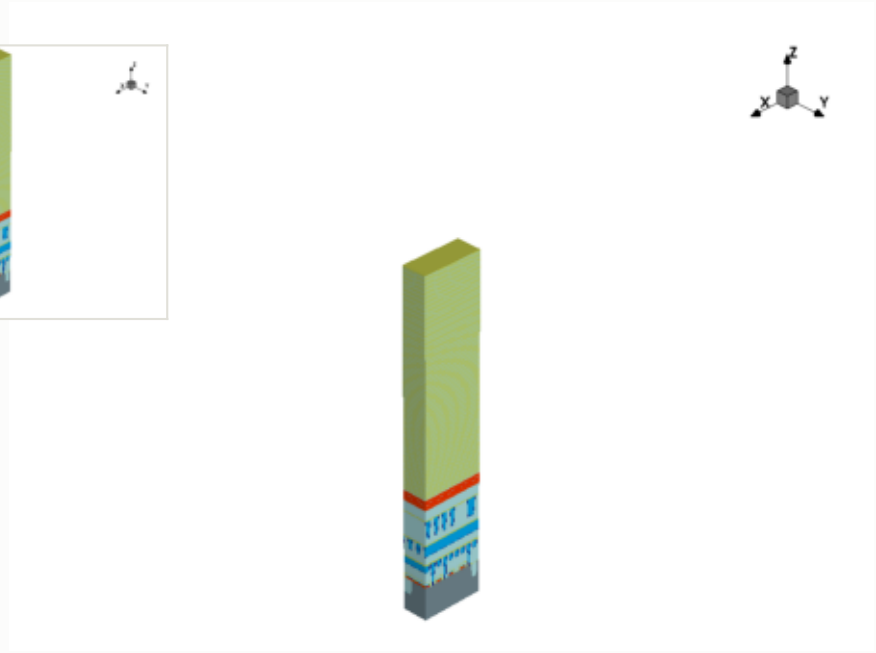

x cut at 0.000 µm

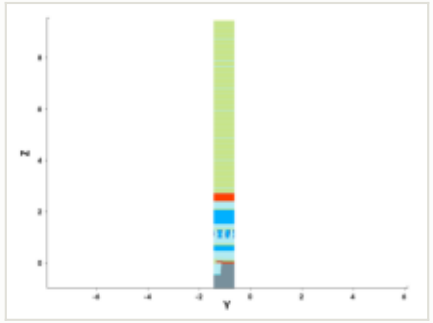

y cut at -1.035 µm

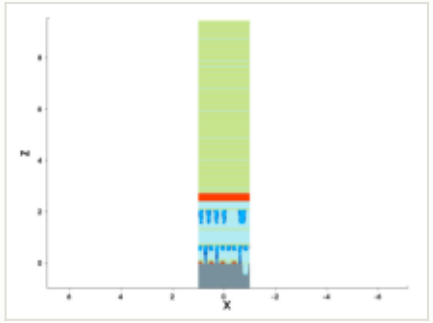


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

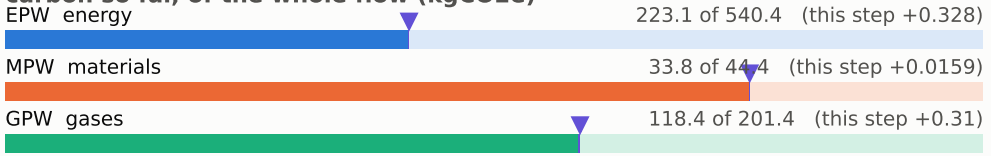


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

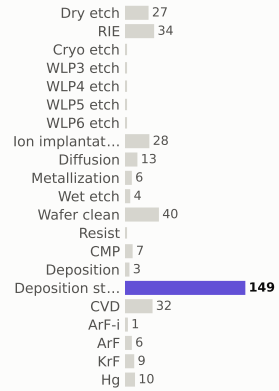

materials deposited (g)

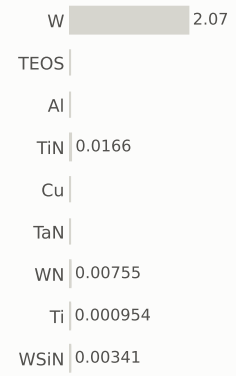

gases emitted (g)

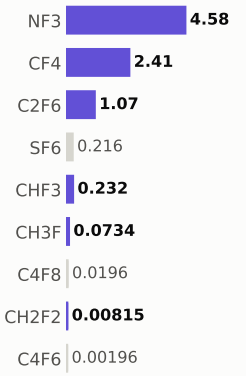


Step #5290: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	375.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

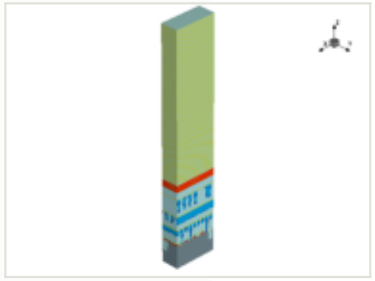


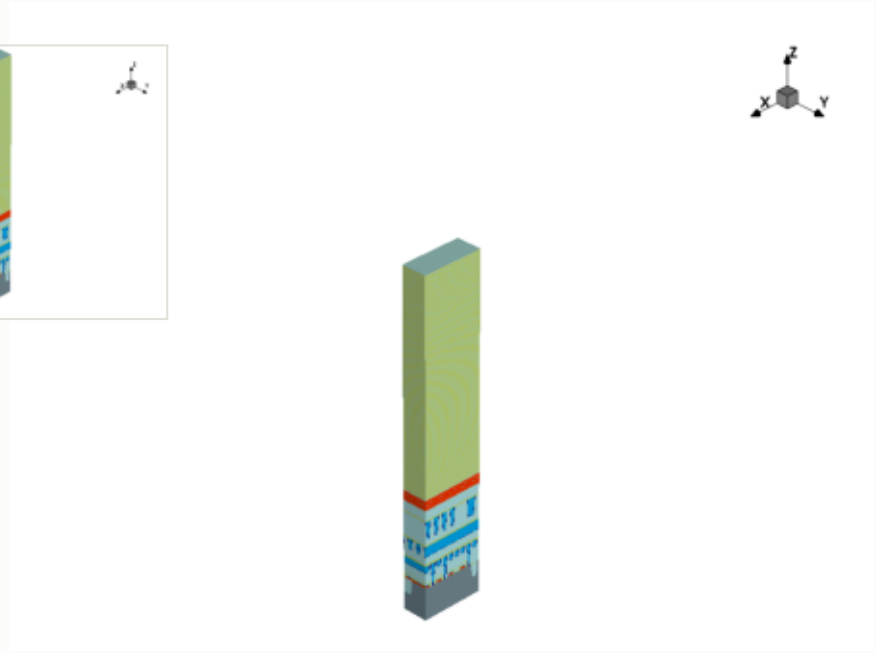

x cut at 0.000 µm

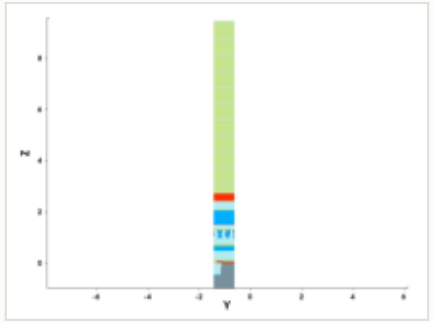

y cut at -1.035 µm

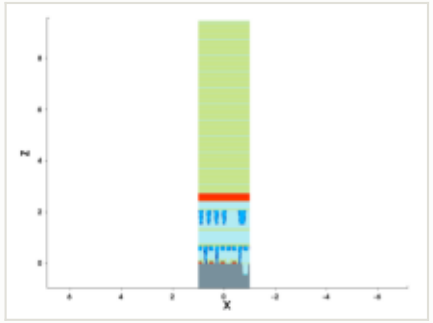


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

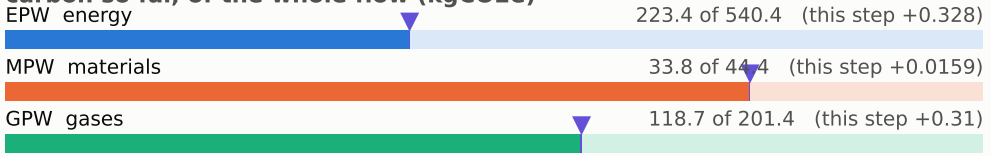


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

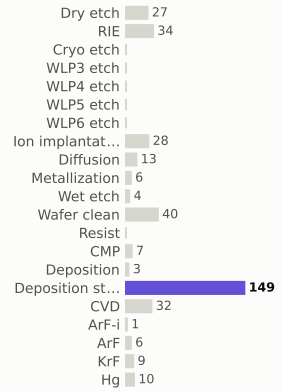

materials deposited (g)

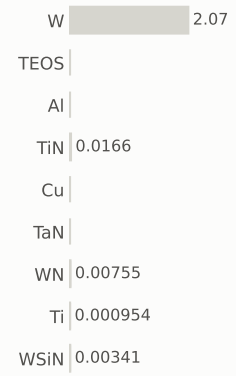

gases emitted (g)



Step #5300: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	376.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




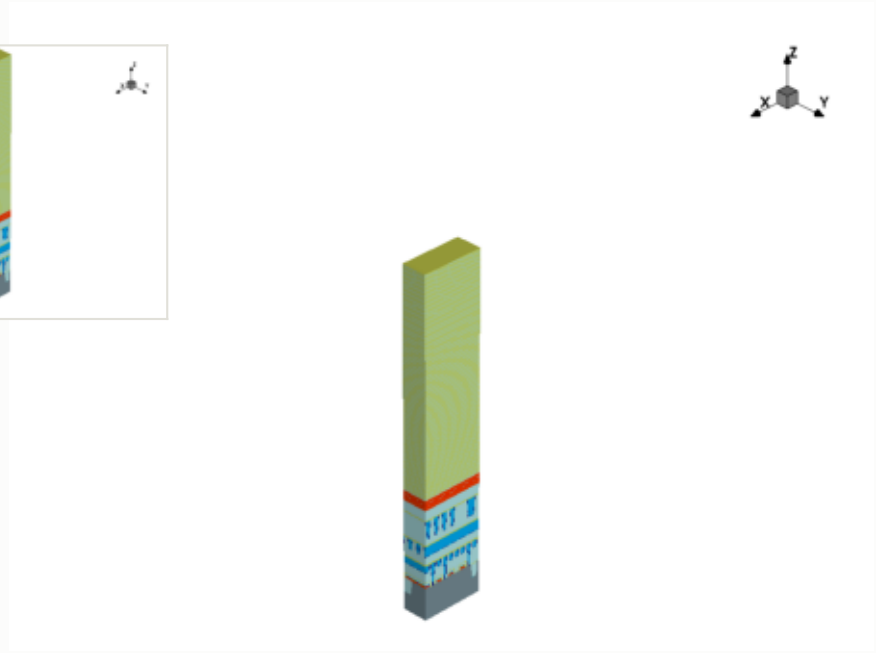

x cut at 0.000 µm

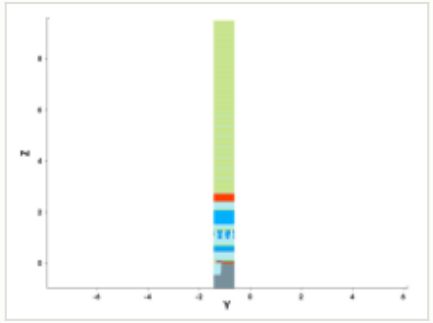

y cut at -1.035 µm

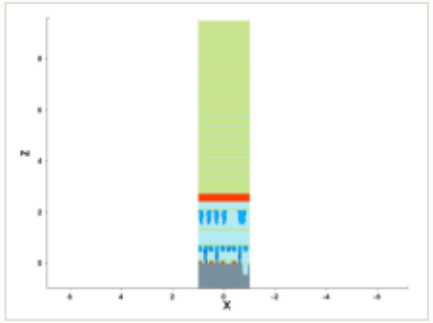


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

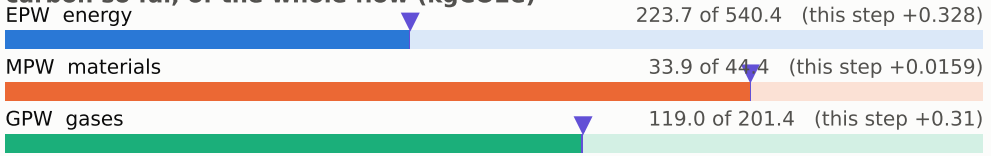


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

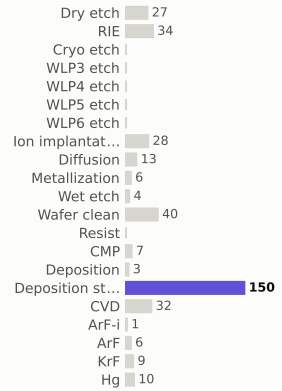

materials deposited (g)

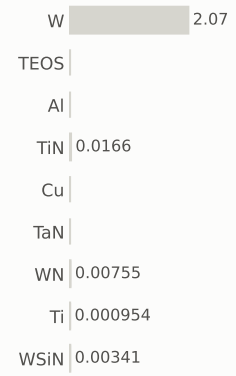

gases emitted (g)

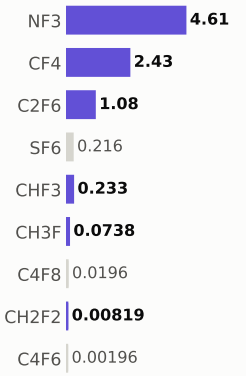

Step #5310: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	377.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




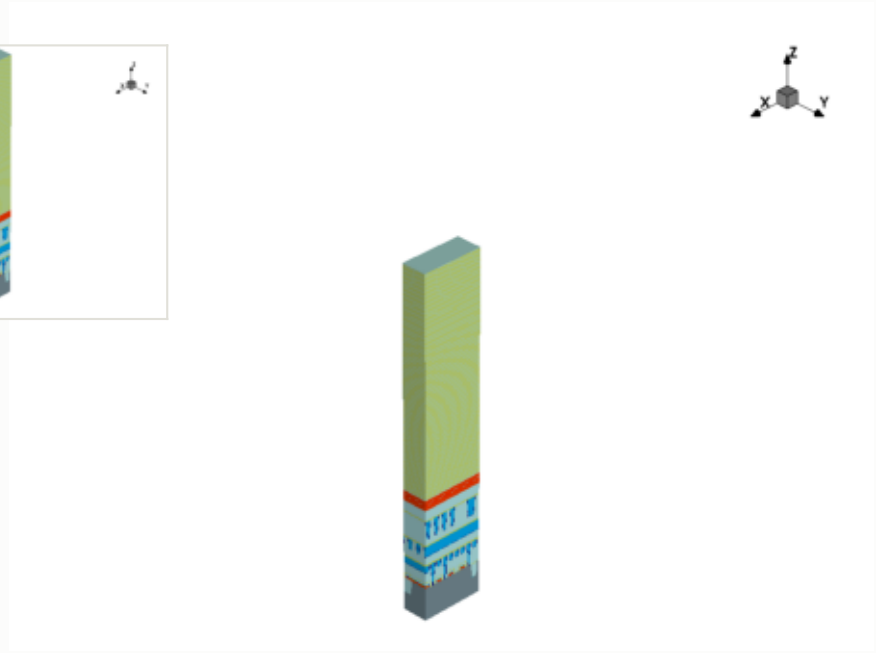

x cut at 0.000 µm

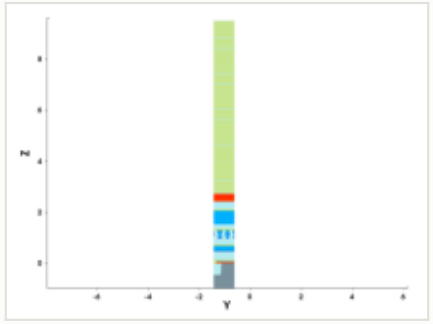

y cut at -1.035 µm

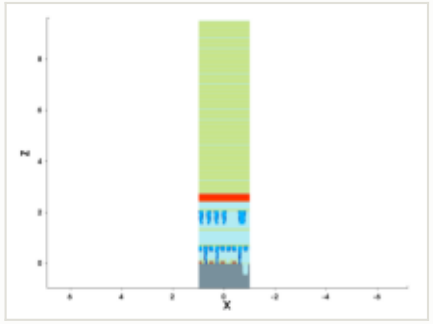


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

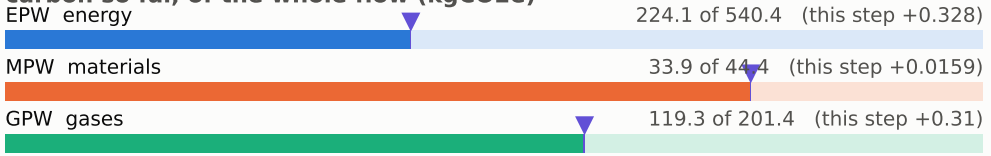


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

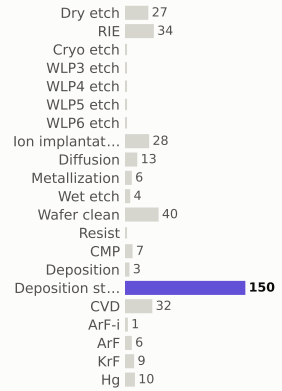

materials deposited (g)

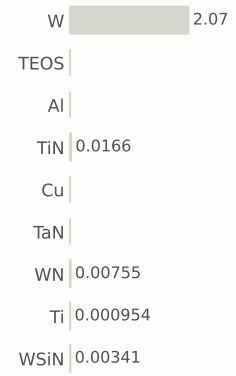

gases emitted (g)

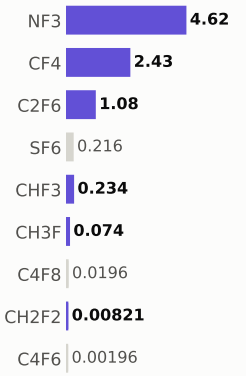


Step #5320: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	377.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

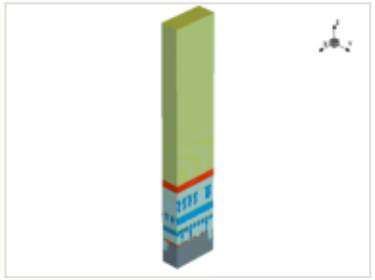


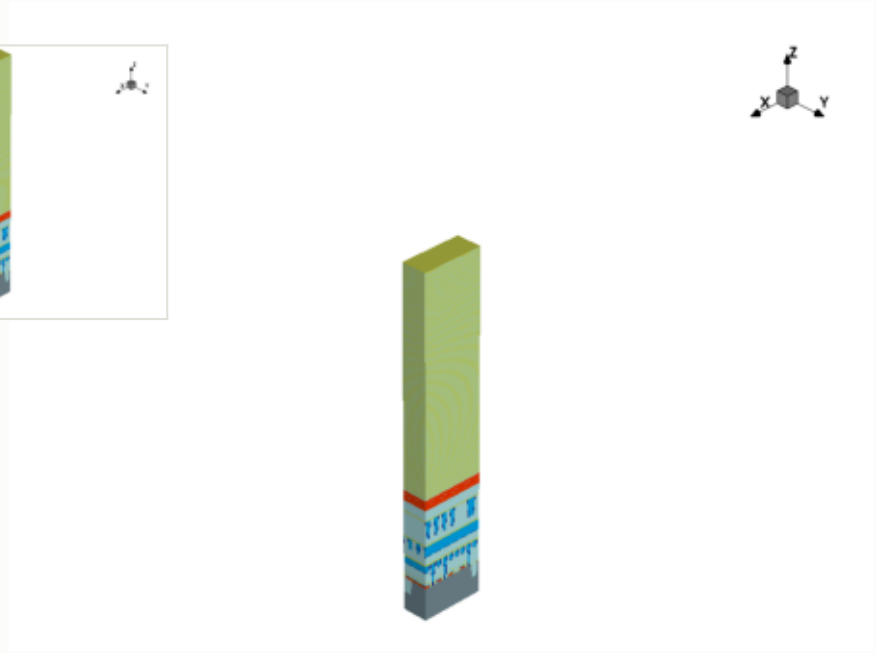

x cut at 0.000 µm

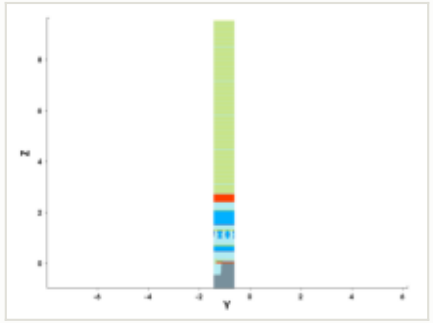

y cut at -1.035 µm

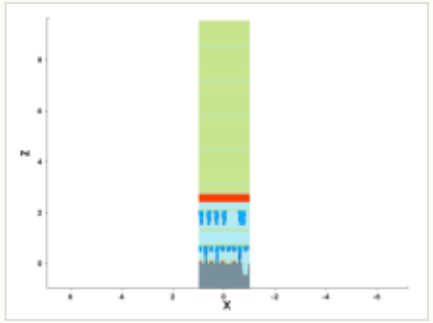


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

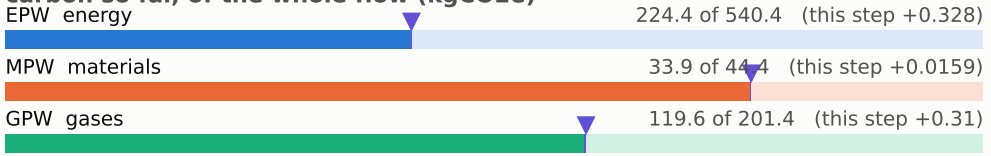

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

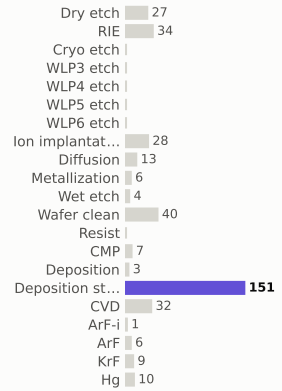

materials deposited (g)



gases emitted (g)




Step #5330: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	378.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

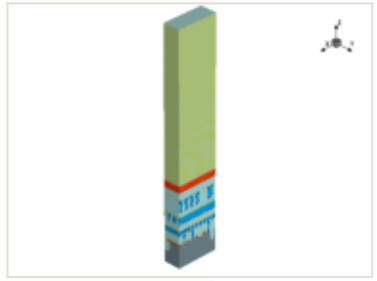


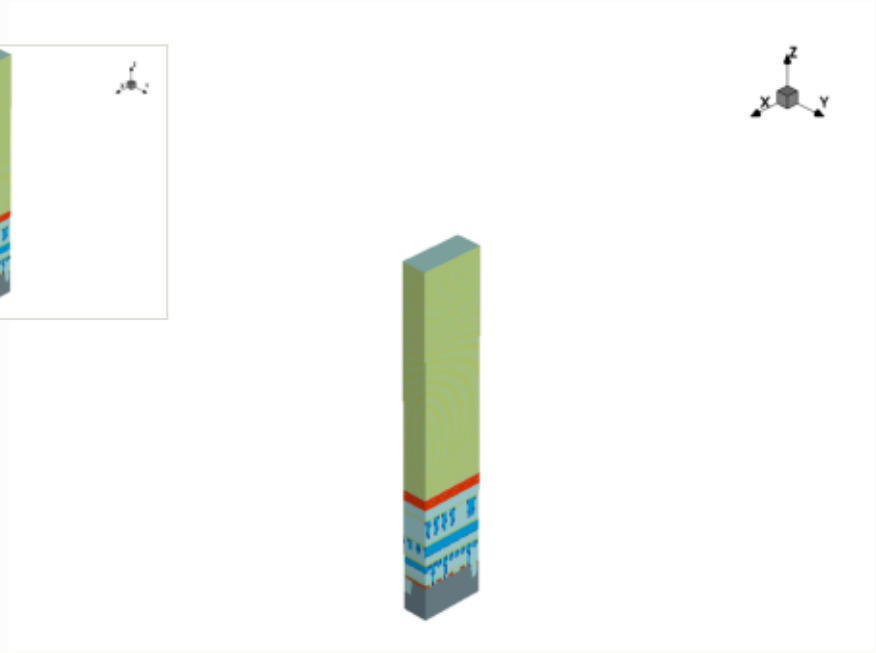

x cut at 0.000 µm

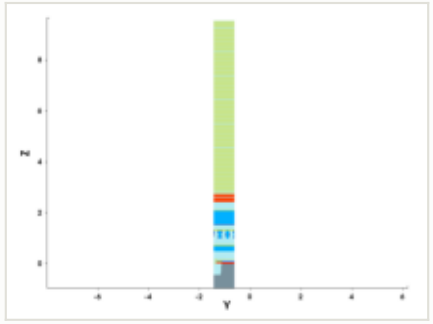

y cut at -1.035 µm

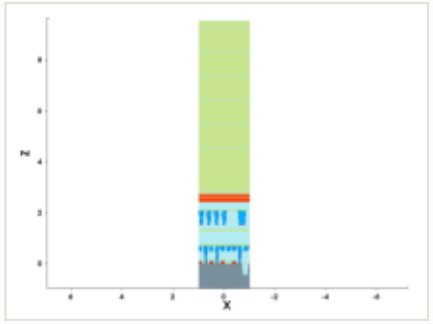


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

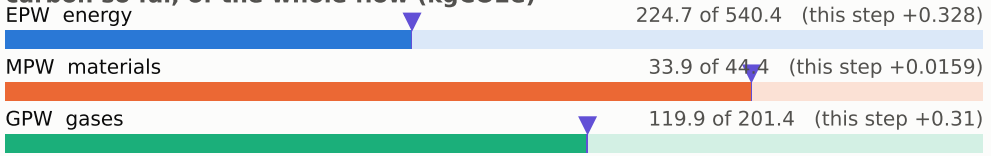

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

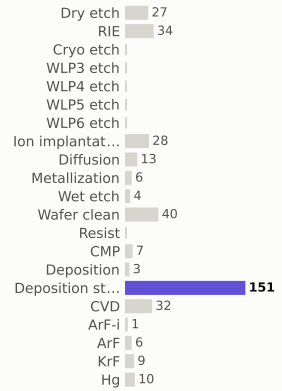

materials deposited (g)



gases emitted (g)




Step #5340: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	379.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

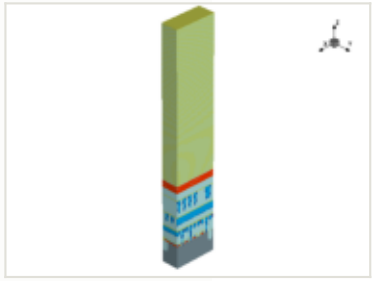


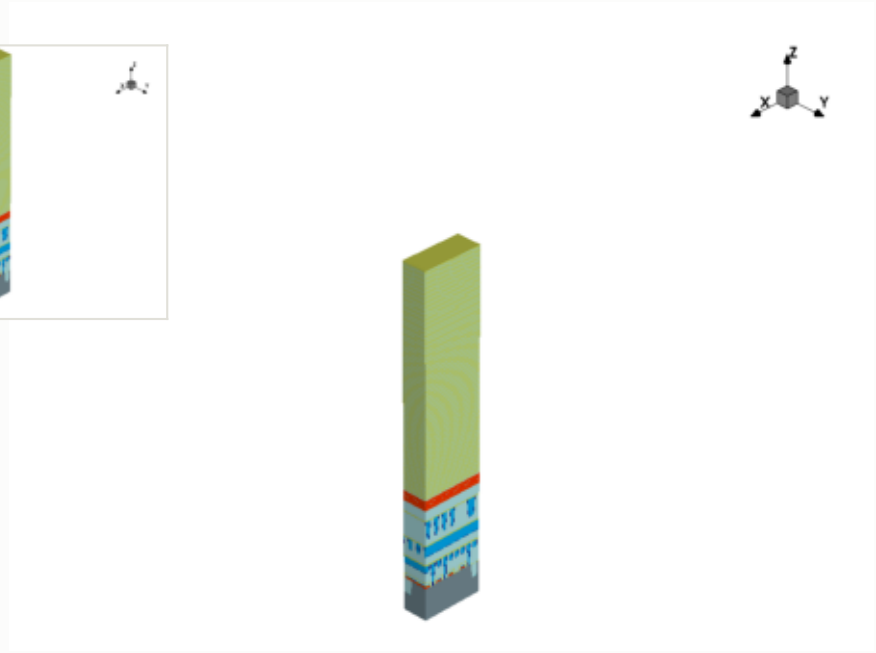

x cut at 0.000 µm

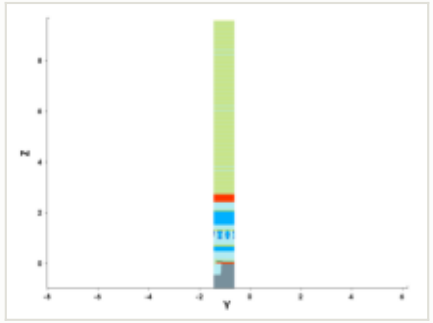

y cut at -1.035 µm

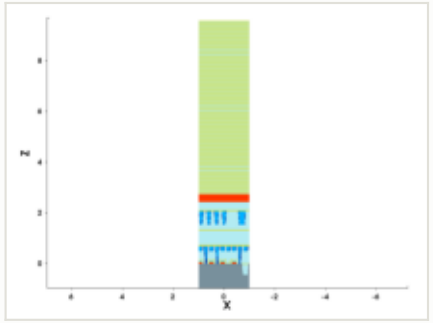


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

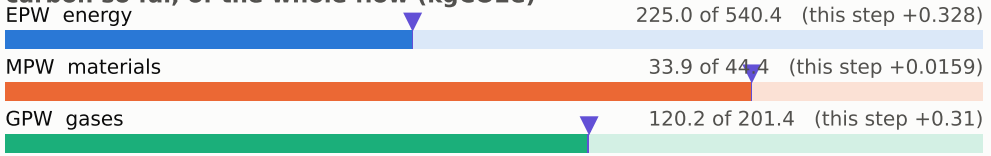

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

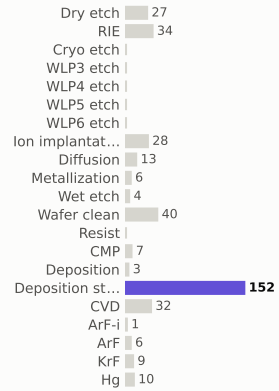

materials deposited (g)



gases emitted (g)

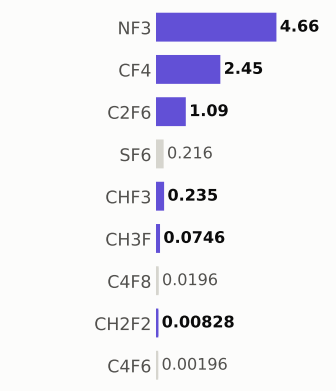


Step #5350: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	379.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

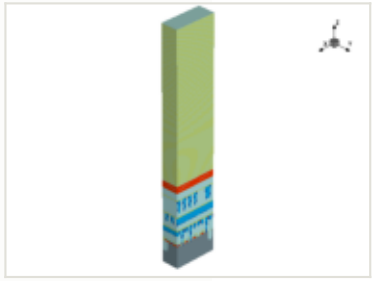


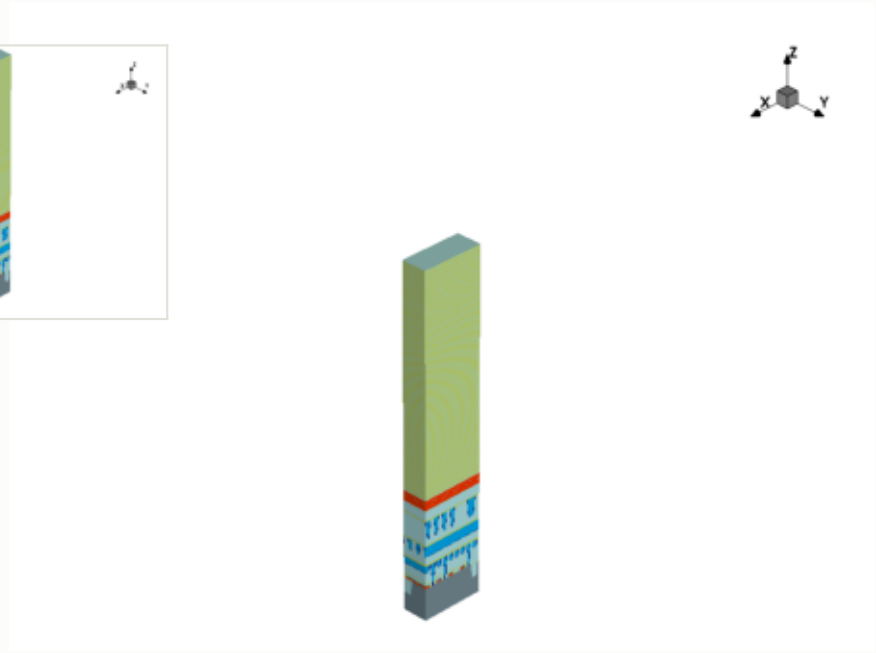

x cut at 0.000 µm

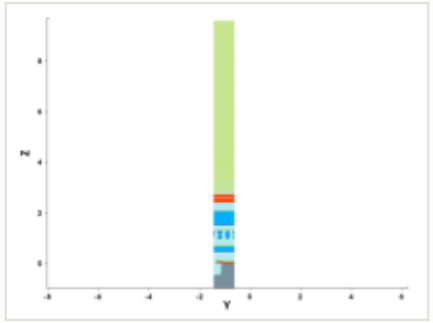

y cut at -1.035 µm

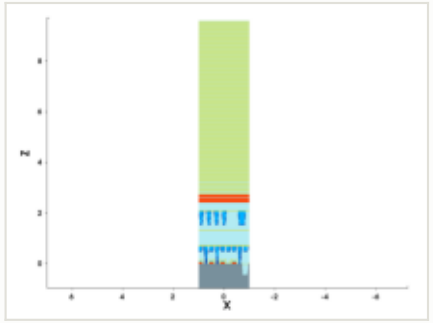


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

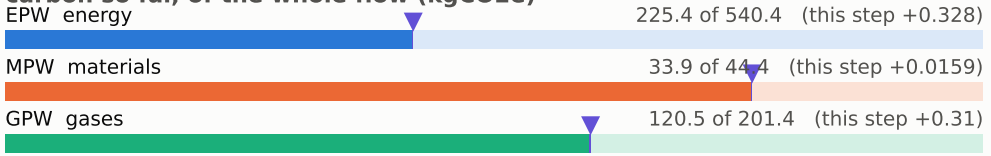

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

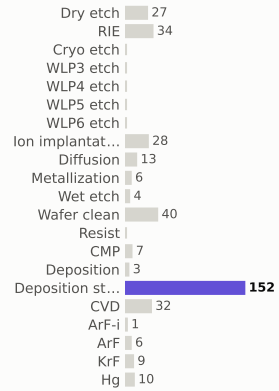

materials deposited (g)



gases emitted (g)

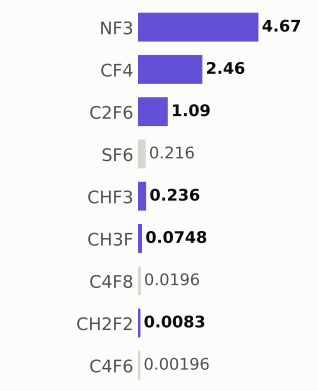

Step #5360: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	380.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




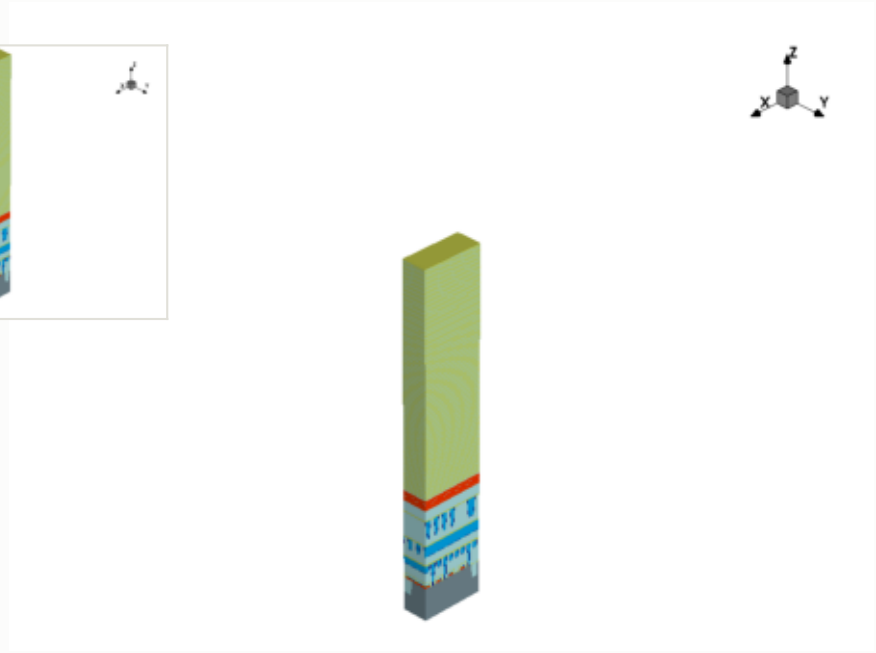

x cut at 0.000 µm

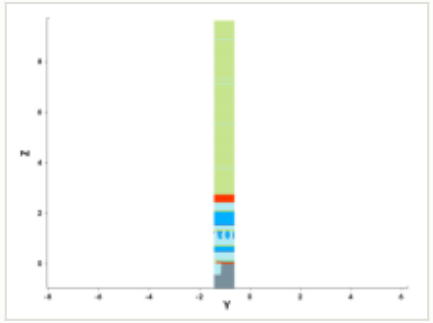

y cut at -1.035 µm

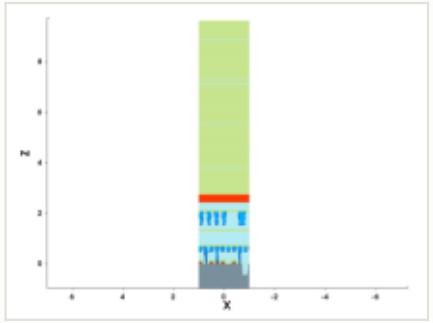


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

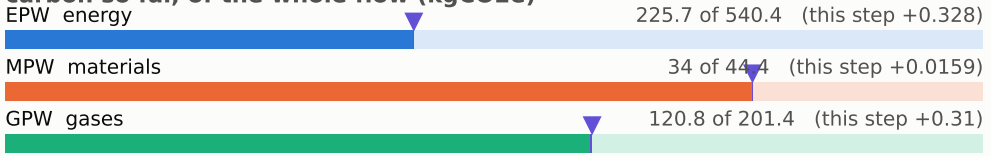

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

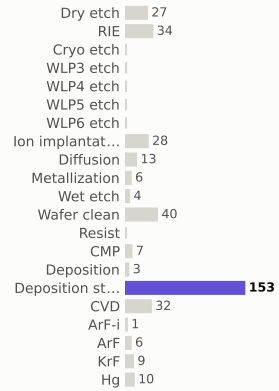

materials deposited (g)



gases emitted (g)

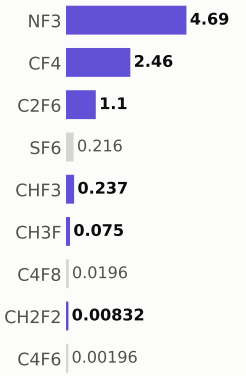


Step #5370: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	381.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

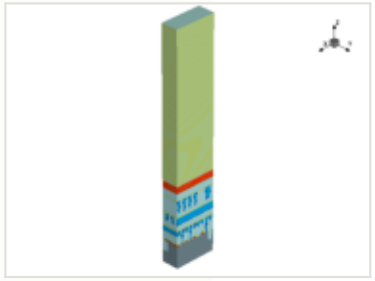


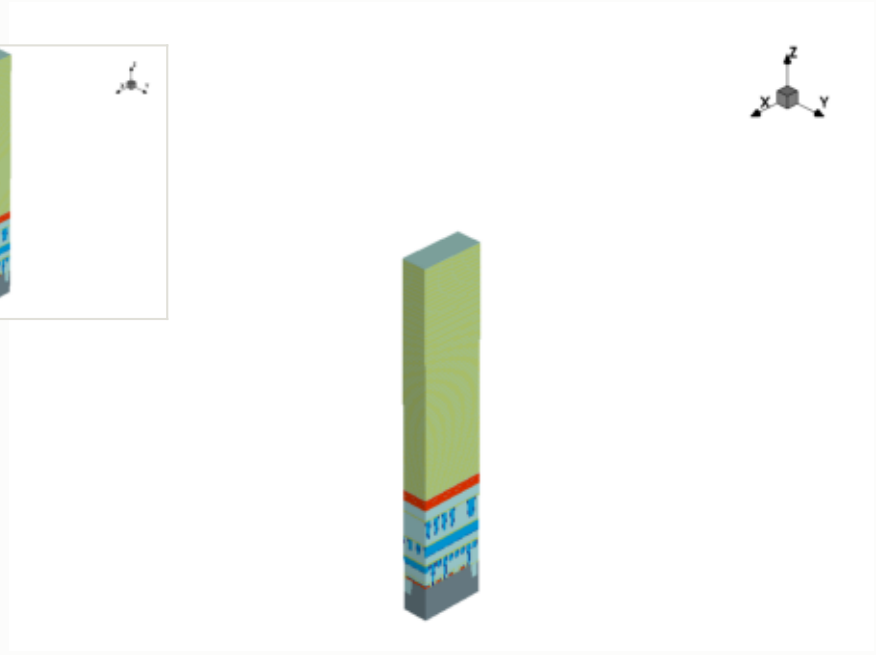

x cut at 0.000 µm

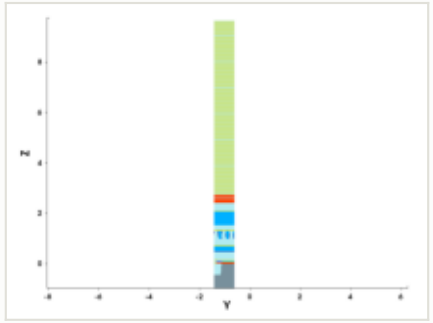

y cut at -1.035 µm

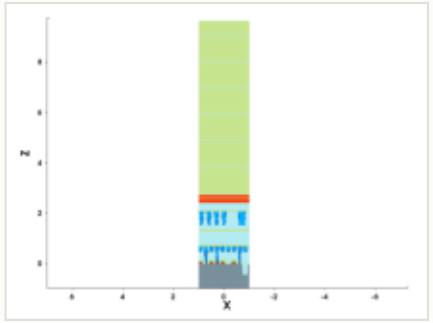


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

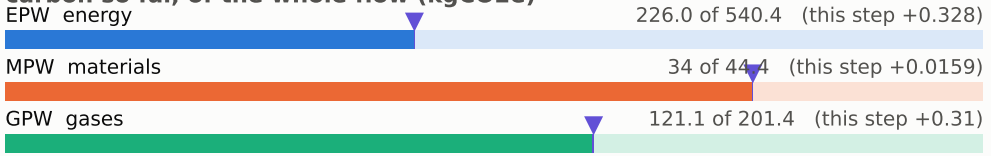


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

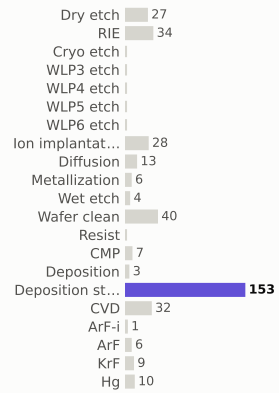

materials deposited (g)

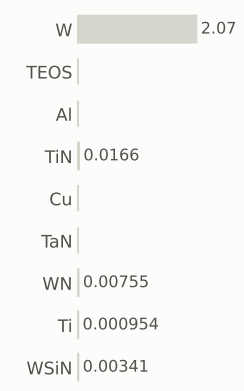

gases emitted (g)




Step #5380: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	381.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

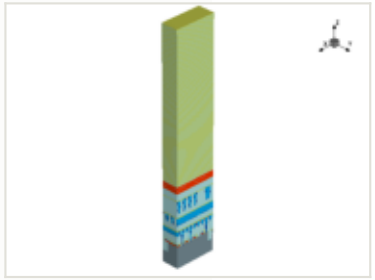


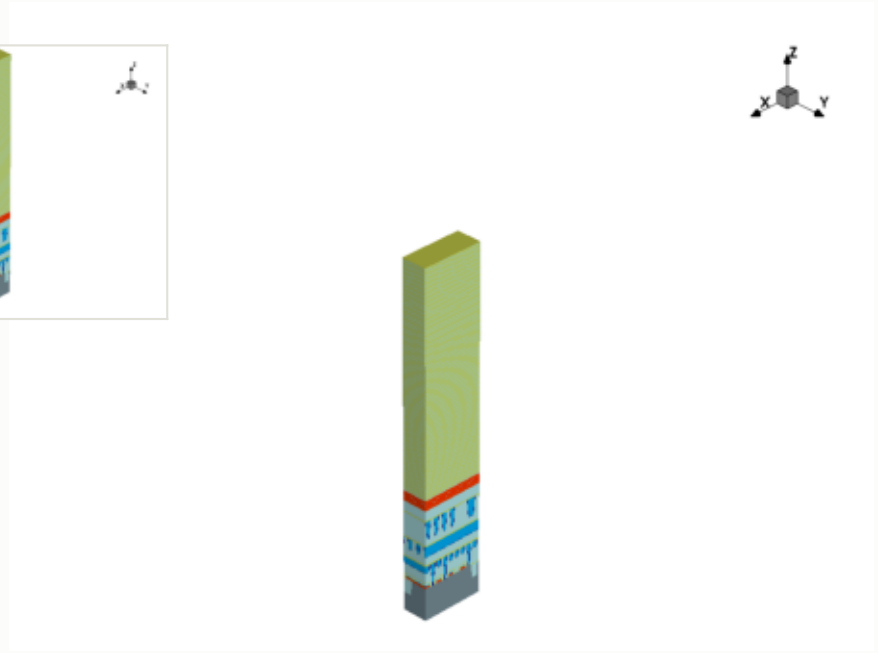

x cut at 0.000 µm

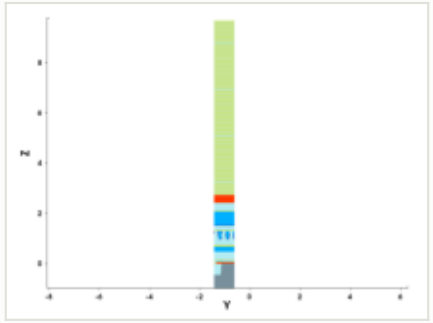

y cut at -1.035 µm

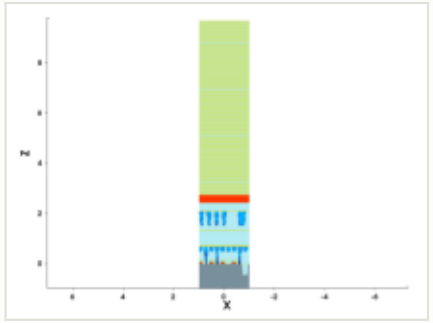


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

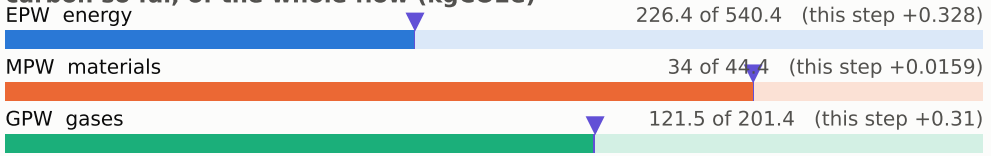

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

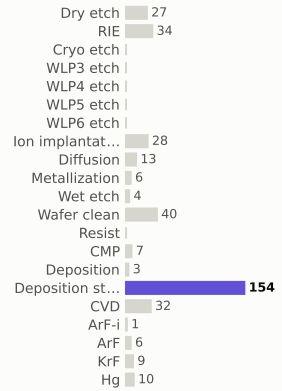

materials deposited (g)



gases emitted (g)

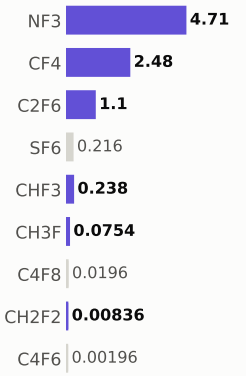


Step #5390: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	382.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

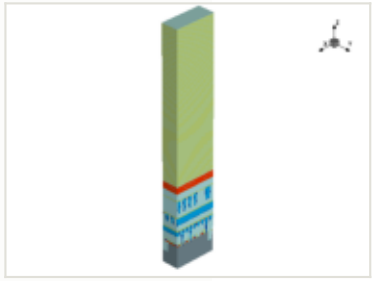


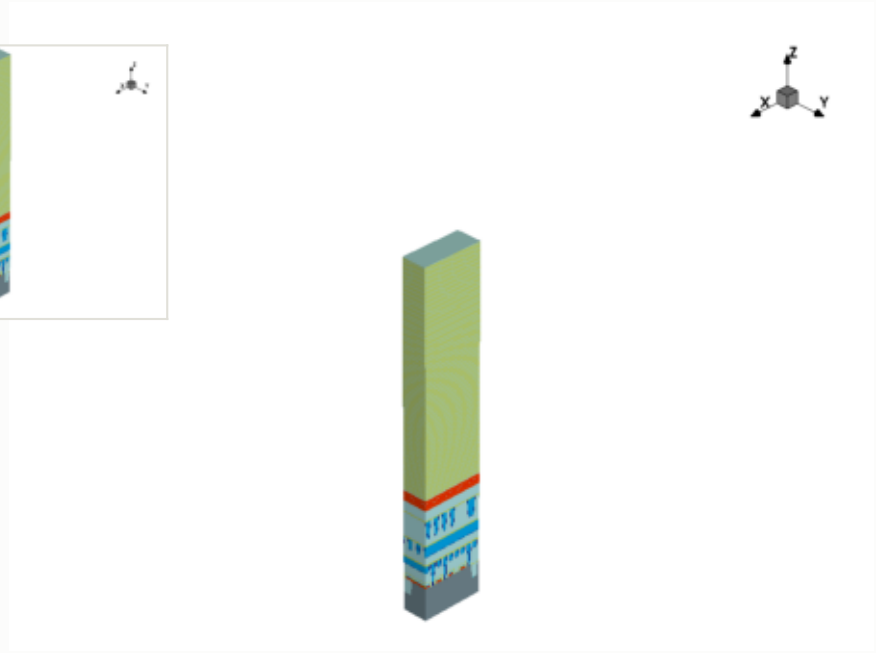

x cut at 0.000 µm

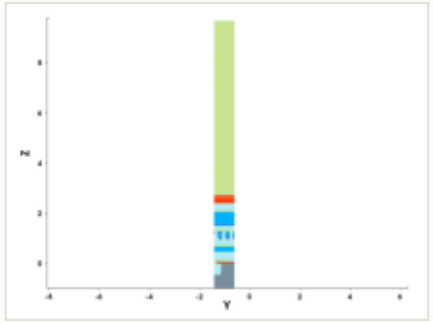

y cut at -1.035 µm

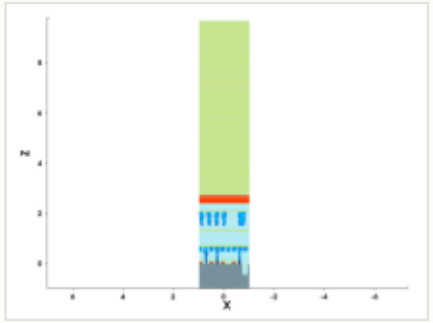


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

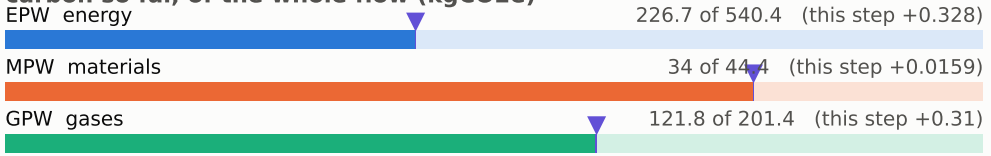


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

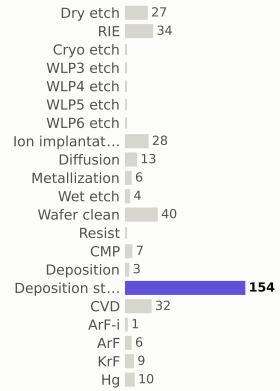

materials deposited (g)

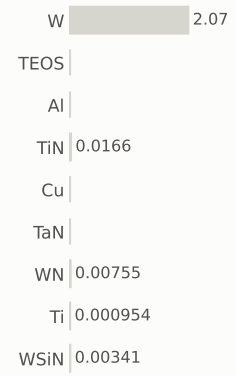

gases emitted (g)

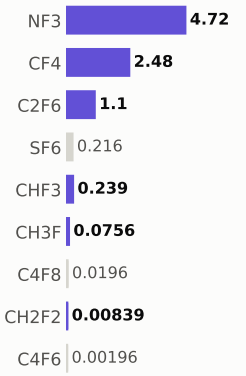


Step #5400: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	383.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

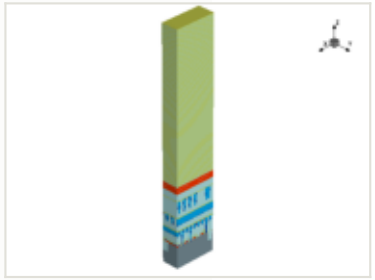


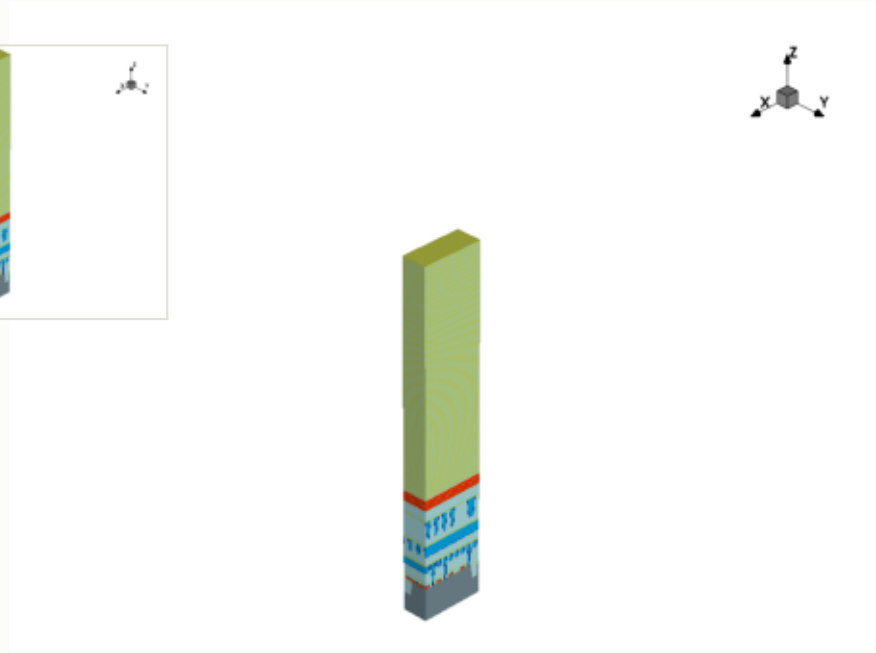


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

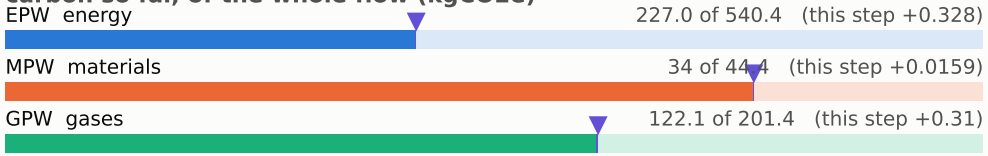


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

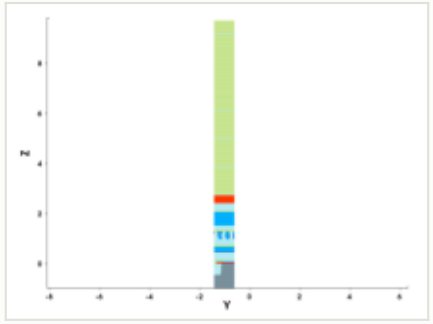


y cut at -1.035 µm

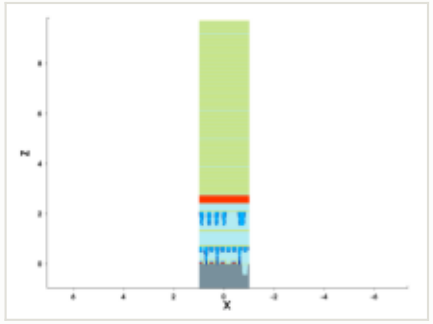


mask for this step

no mask for this step


steps by process area

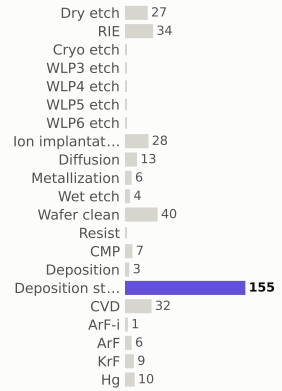

materials deposited (g)

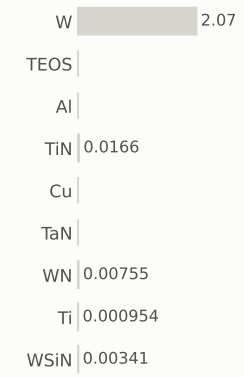

gases emitted (g)

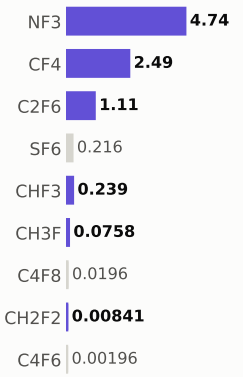


Step #5410: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	383.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

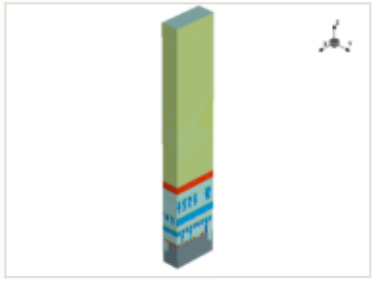


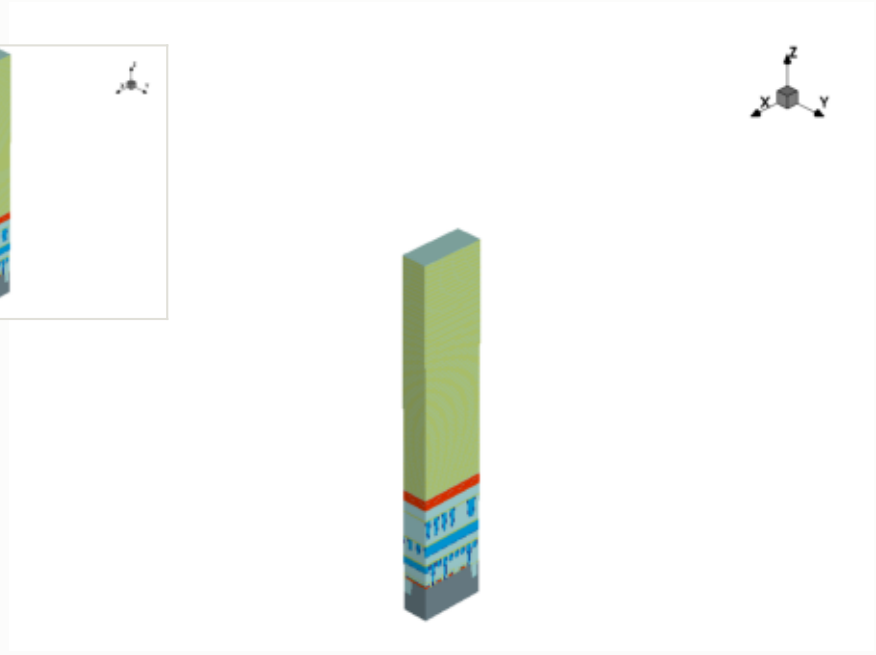

x cut at 0.000 µm

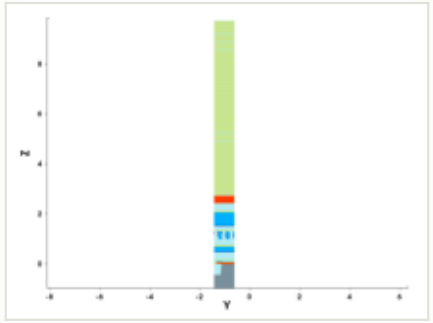

y cut at -1.035 µm

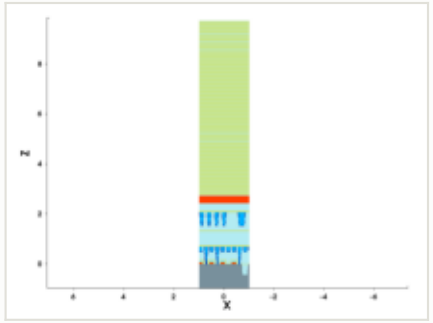


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

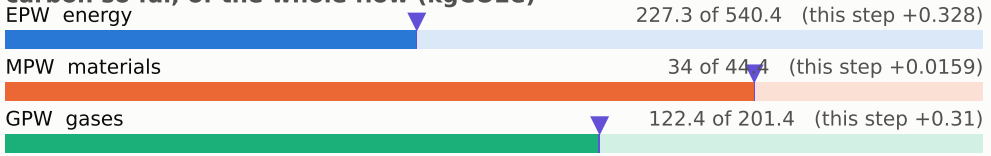

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

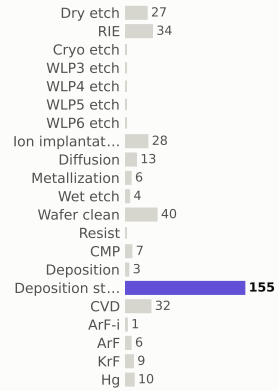

materials deposited (g)



gases emitted (g)

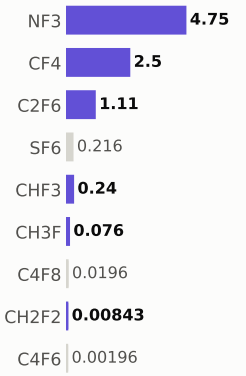

Step #5420: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	384.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




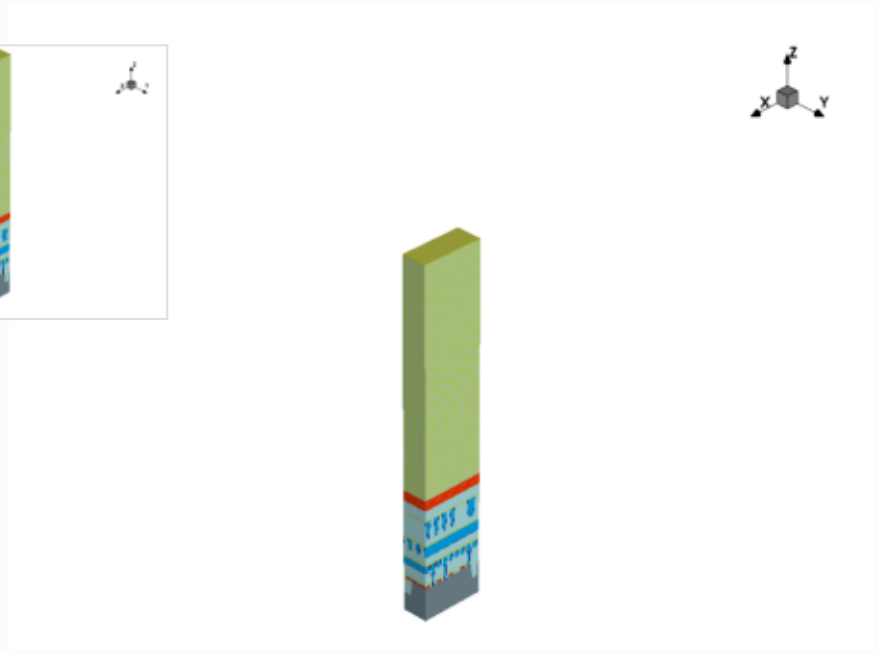

x cut at 0.000 µm

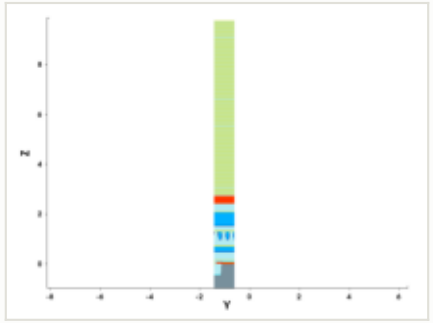

y cut at -1.035 µm

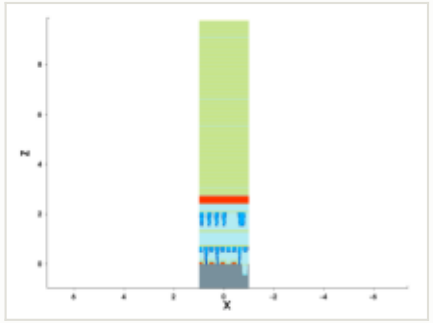


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

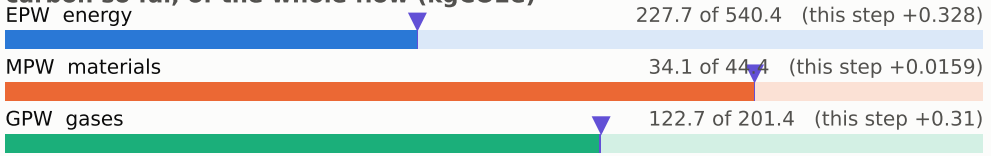

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

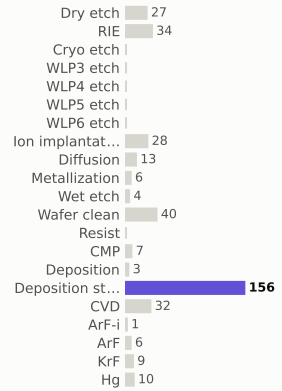

materials deposited (g)



gases emitted (g)

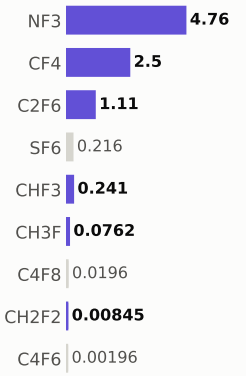


Step #5430: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	385.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

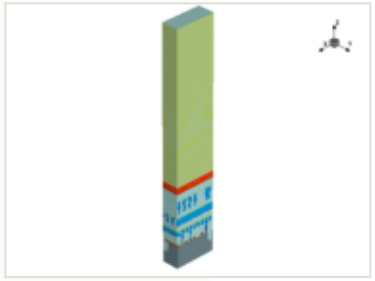


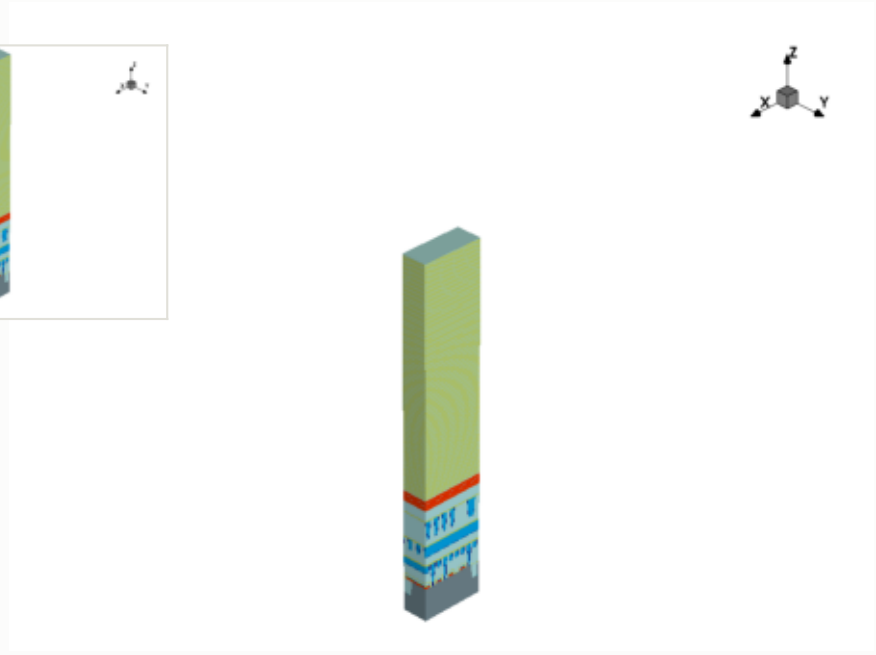

x cut at 0.000 µm

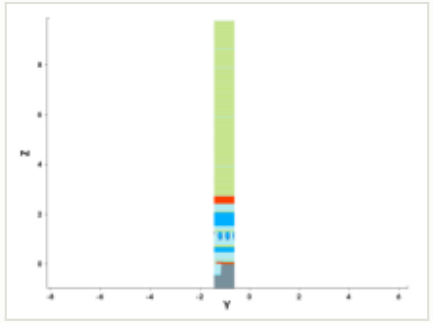

y cut at -1.035 µm

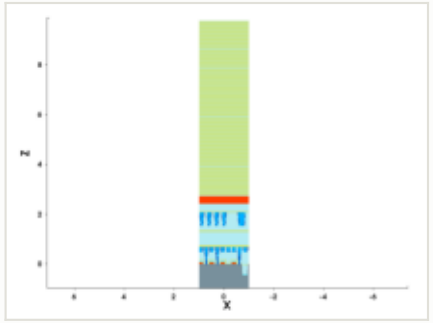

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 228.0 of 540.4 (this step +0.328)


MPW materials — 34.1 of 44.4 (this step +0.0159)

GPW gases — 123.0 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

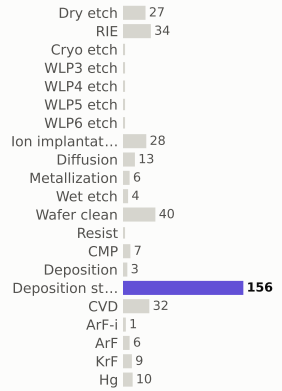

materials deposited (g)

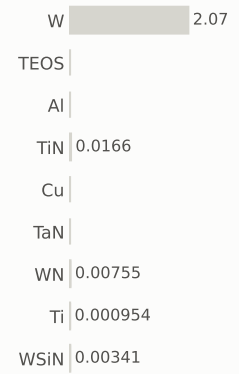

gases emitted (g)




Step #5440: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	385.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

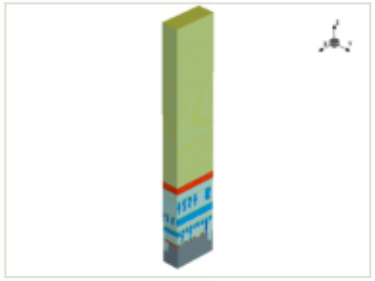


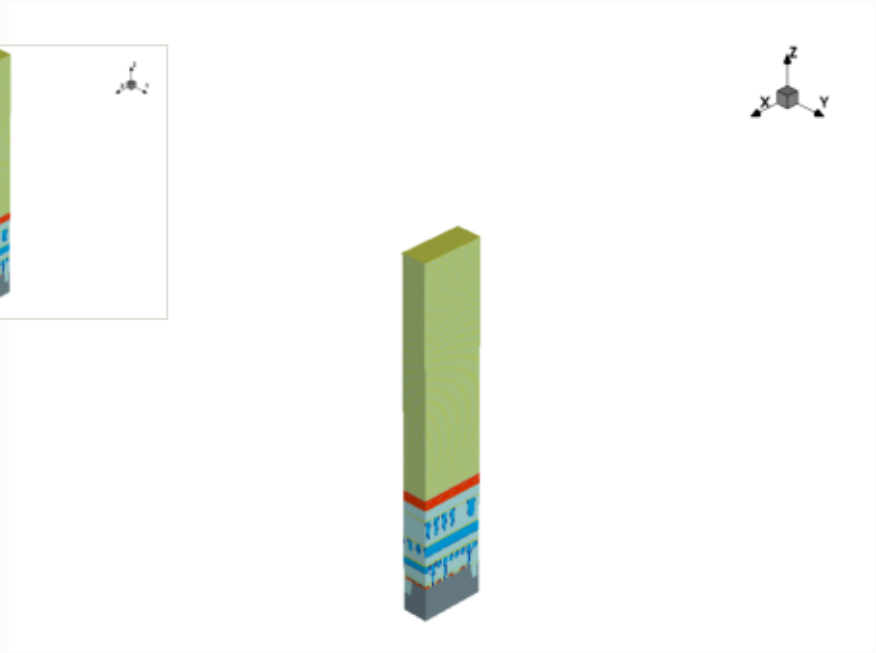


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

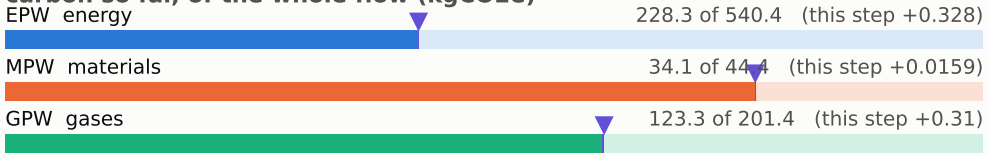


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

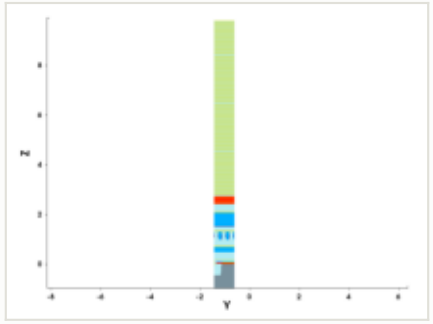


y cut at -1.035 µm

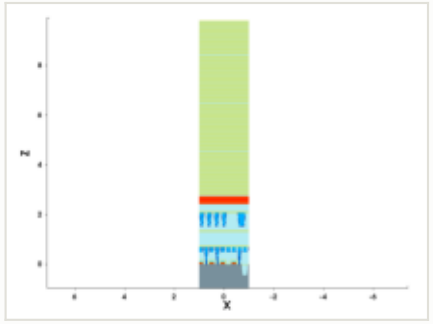


mask for this step

no mask for this step


steps by process area

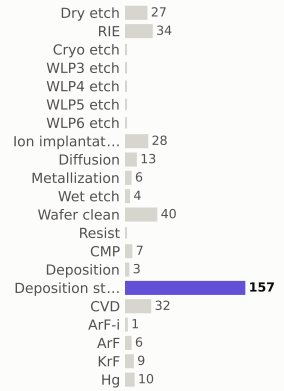

materials deposited (g)

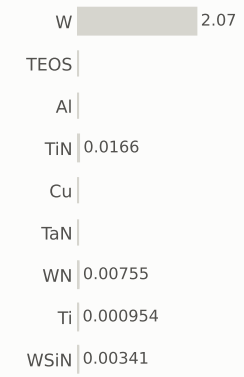

gases emitted (g)




Step #5450: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	386.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

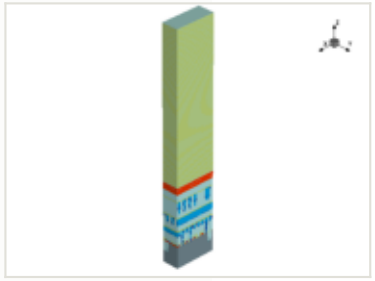


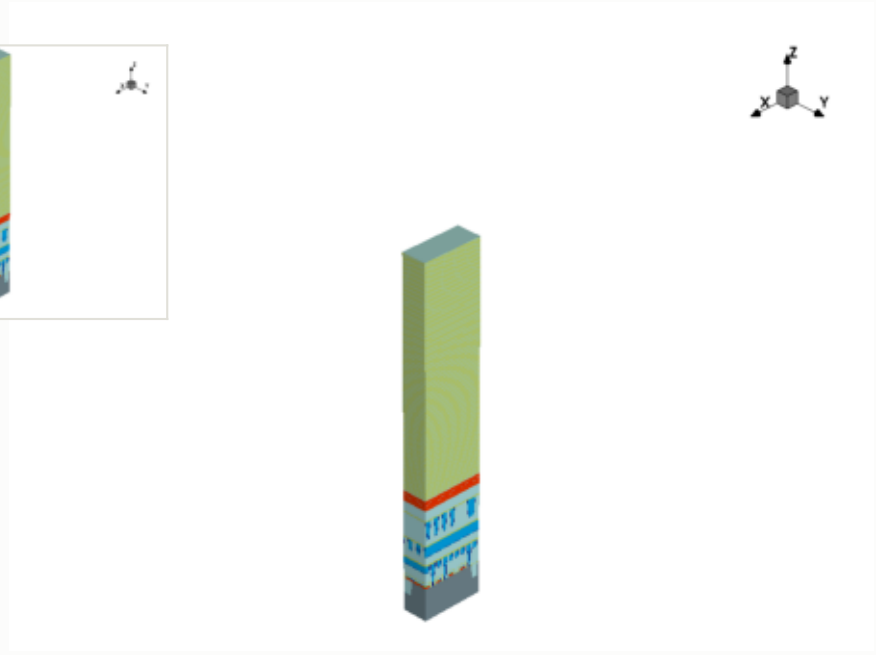

x cut at 0.000 µm

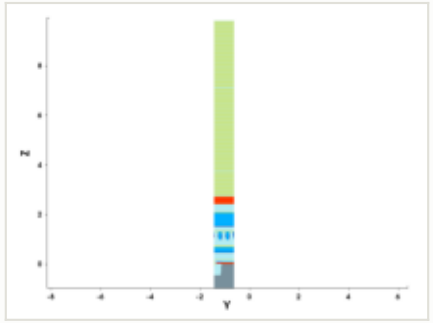

y cut at -1.035 µm

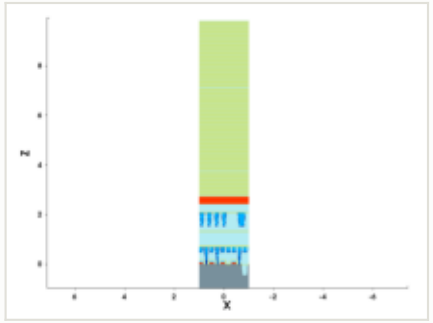


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

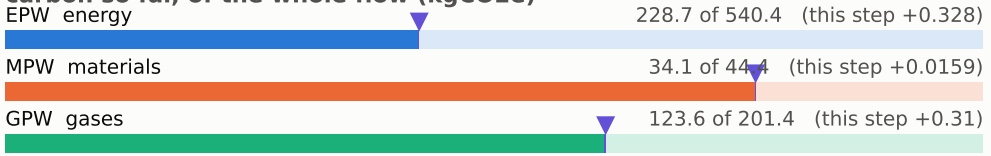

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

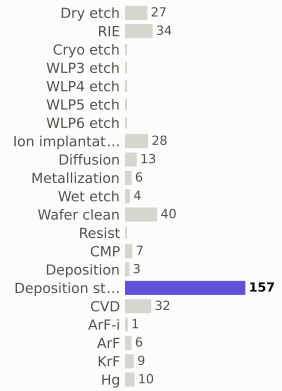

materials deposited (g)



gases emitted (g)

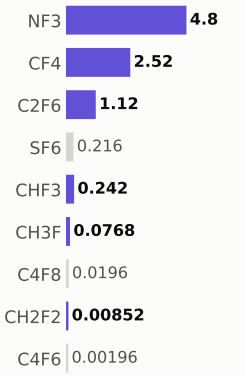


Step #5460: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	387.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

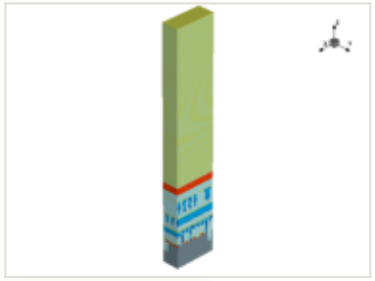


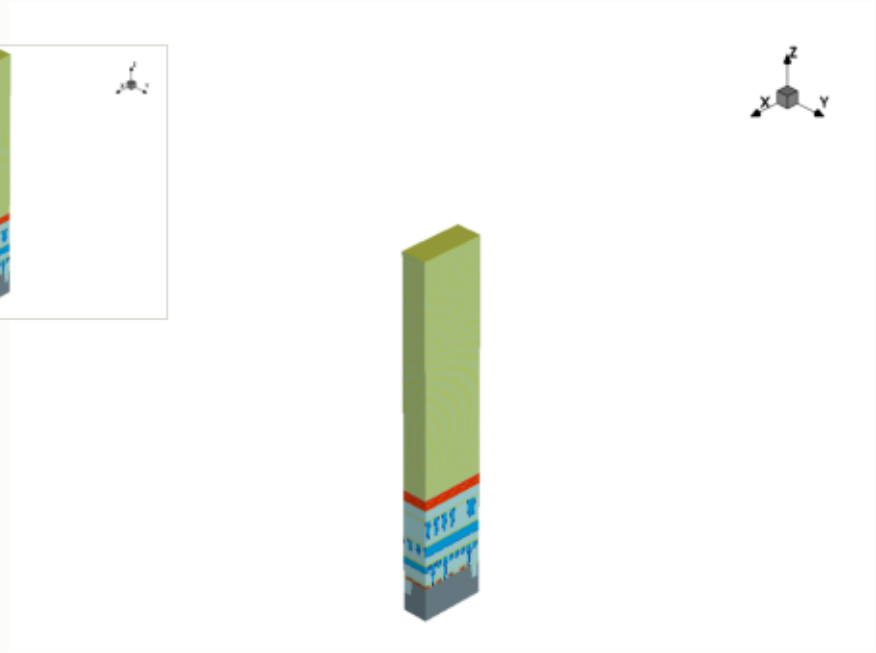

x cut at 0.000 µm

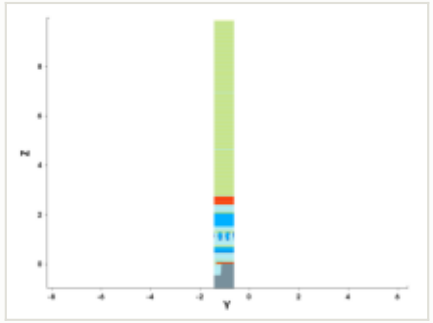

y cut at -1.035 µm

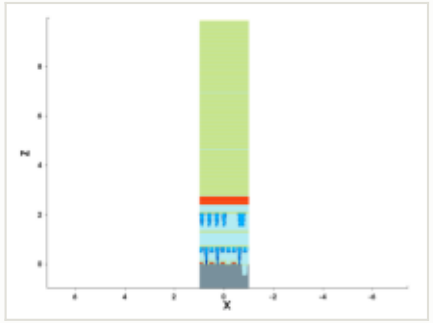

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 229.0 of 540.4 (this step +0.328)


MPW materials — 34.1 of 44.4 (this step +0.0159)

GPW gases — 123.9 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

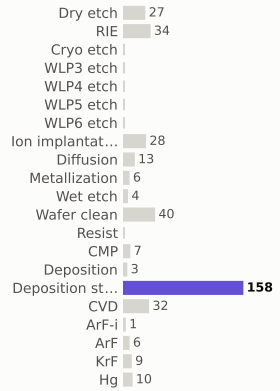

materials deposited (g)

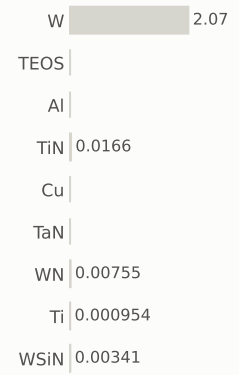

gases emitted (g)

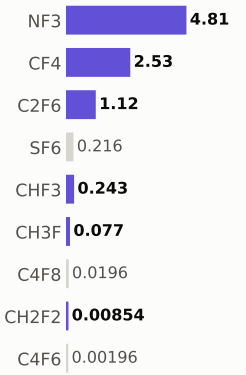

Step #5470: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	387.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




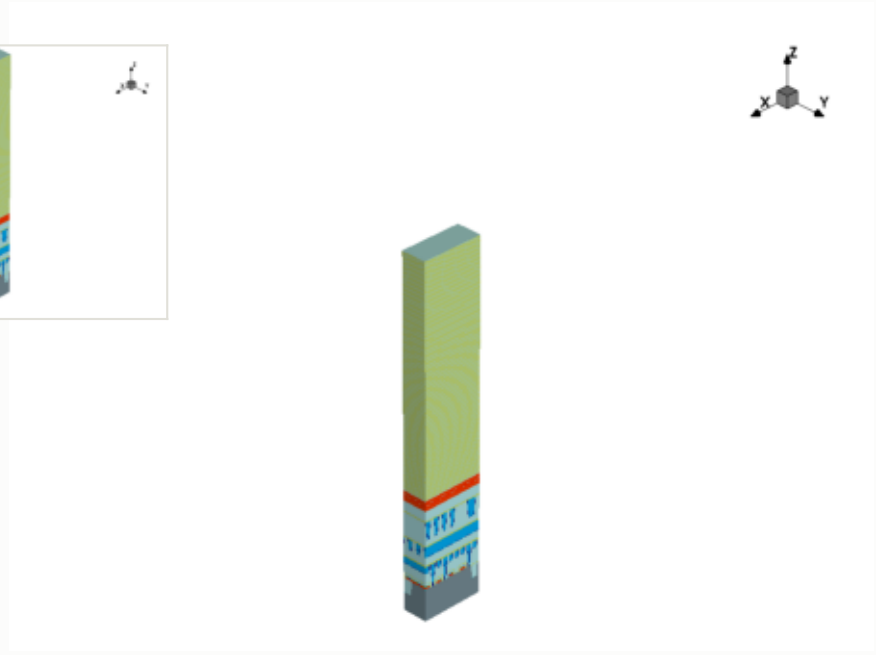

x cut at 0.000 µm

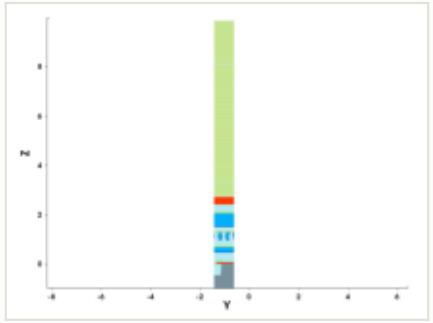

y cut at -1.035 µm

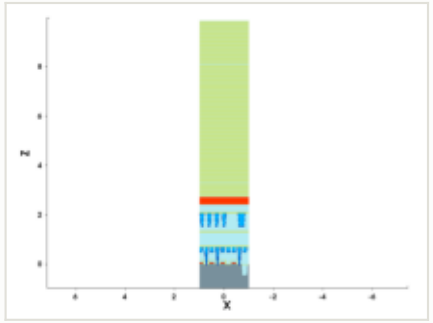


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

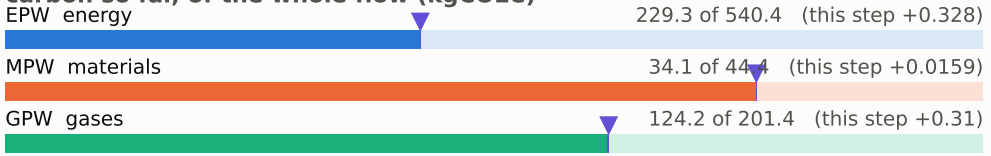


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

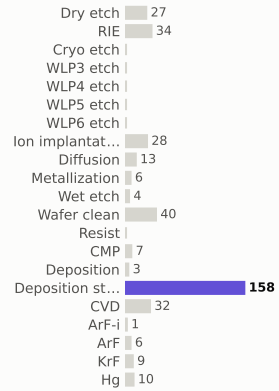

materials deposited (g)

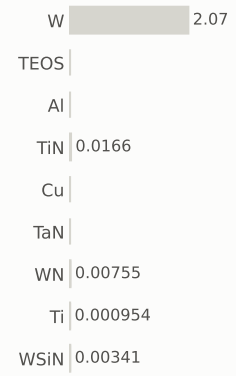

gases emitted (g)

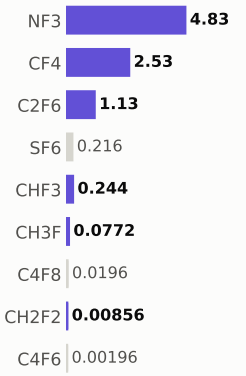


Step #5480: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	388.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

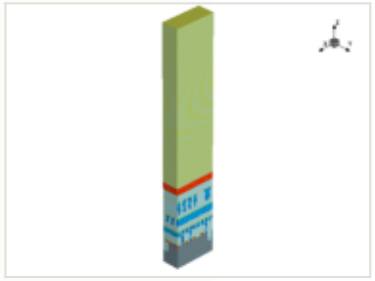


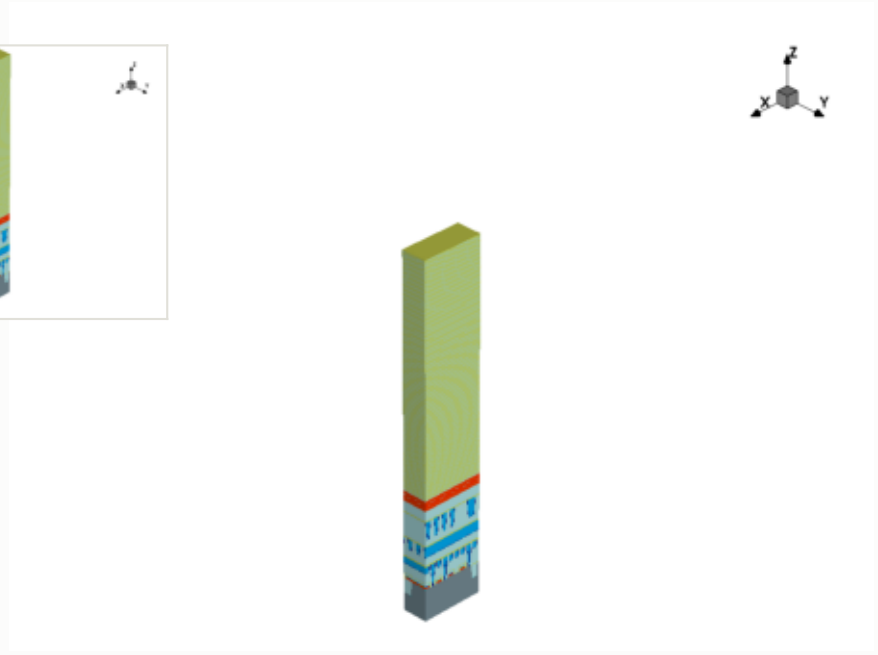

x cut at 0.000 µm

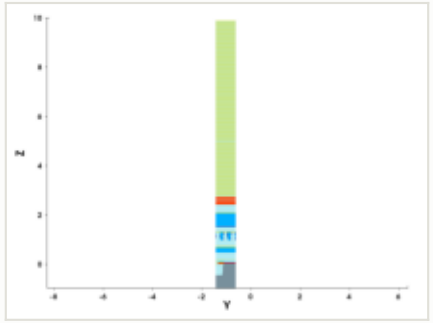

y cut at -1.035 µm

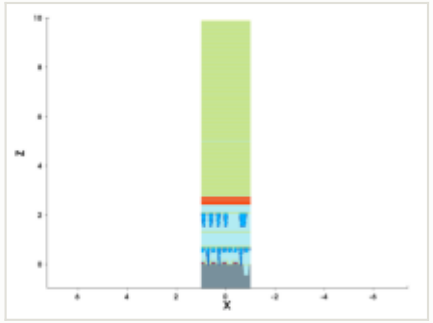


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

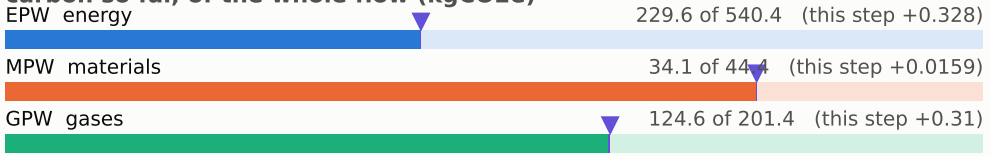

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

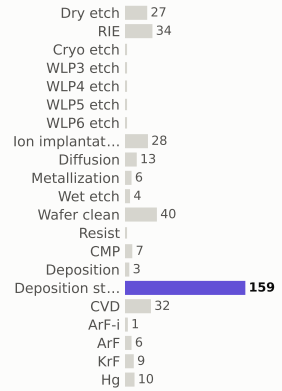

materials deposited (g)



gases emitted (g)

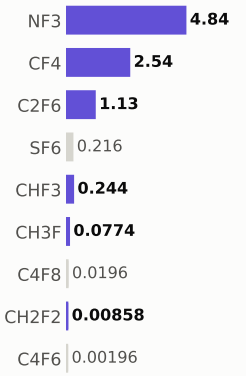


Step #5490: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	389.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

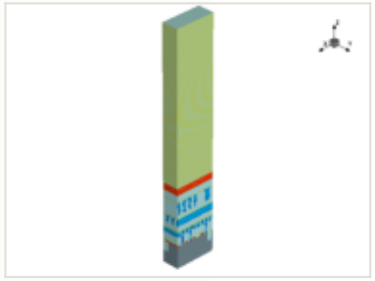


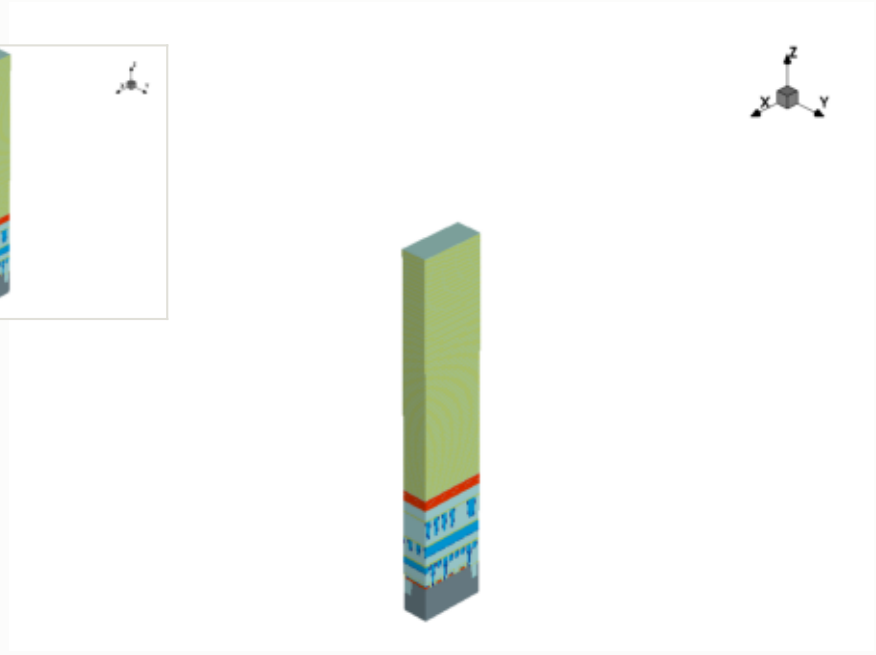

x cut at 0.000 µm

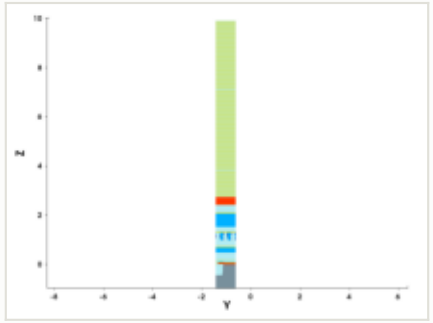

y cut at -1.035 µm

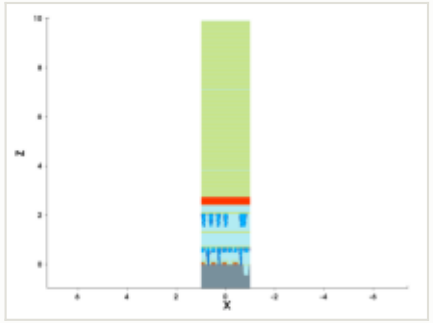


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

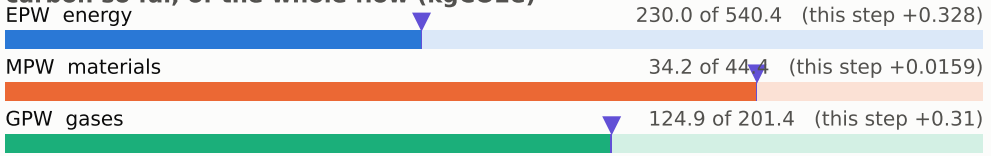

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

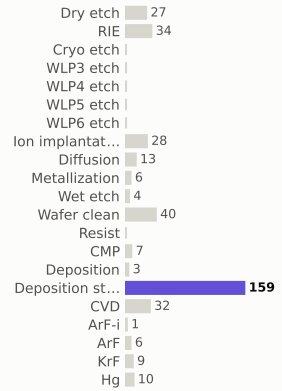

materials deposited (g)



gases emitted (g)




Step #5500: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	389.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

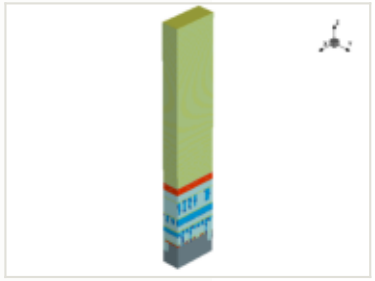


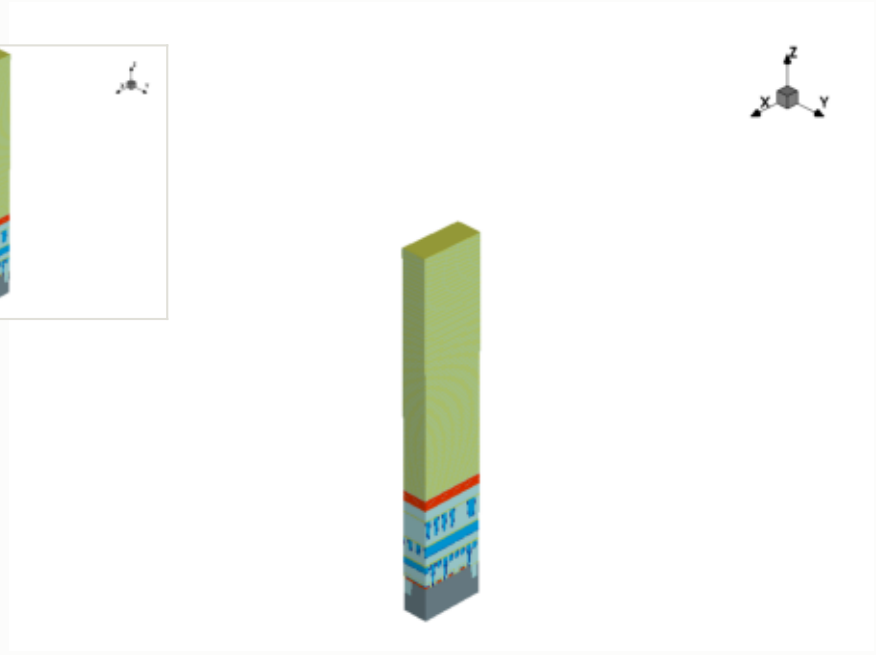

x cut at 0.000 µm

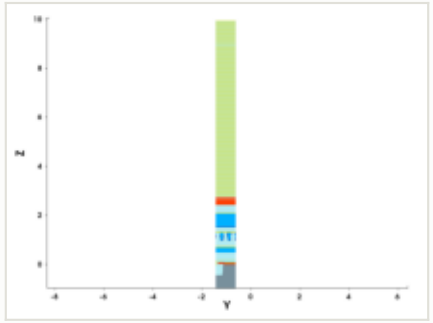

y cut at -1.035 µm

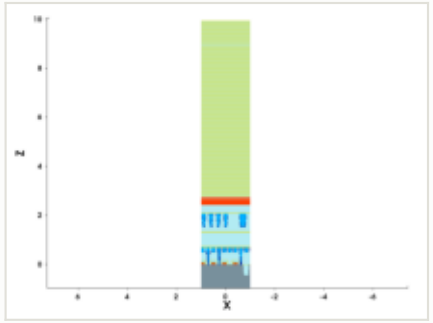


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

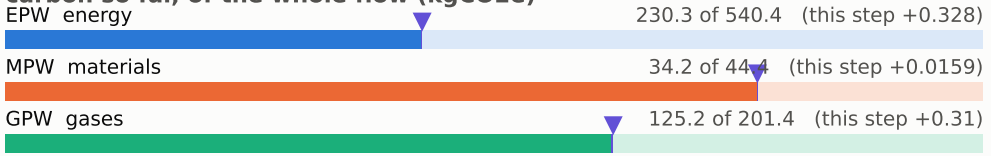

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

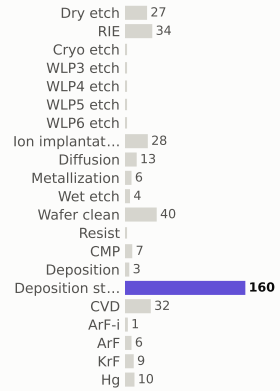

materials deposited (g)



gases emitted (g)

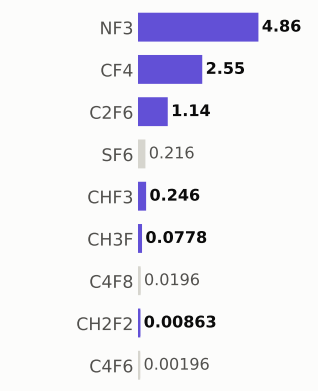

Step #5510: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	390.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




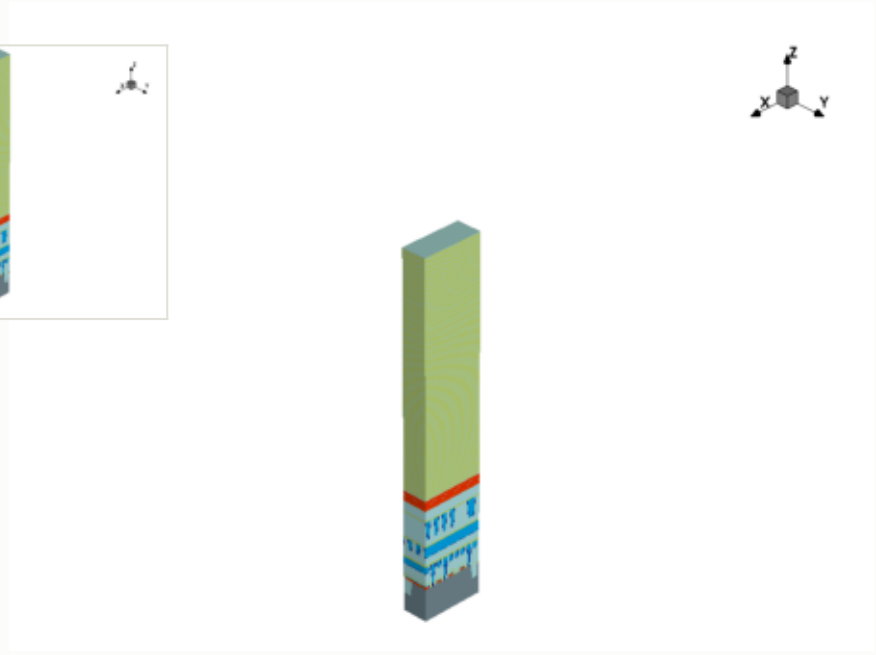

x cut at 0.000 µm

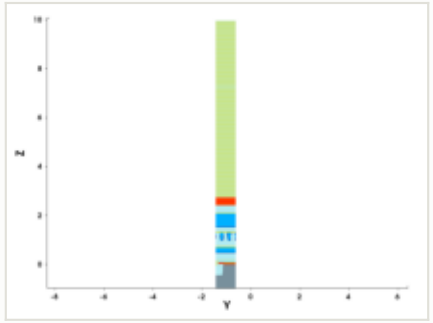

y cut at -1.035 µm

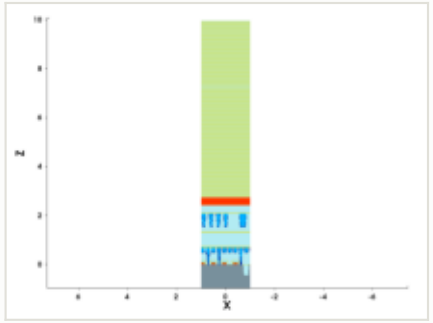


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

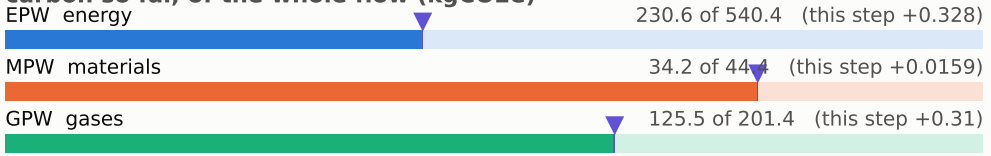

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

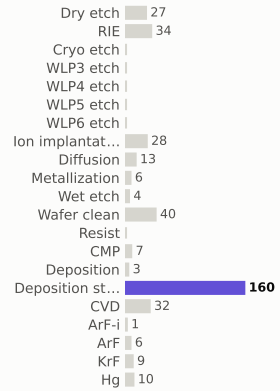

materials deposited (g)



gases emitted (g)

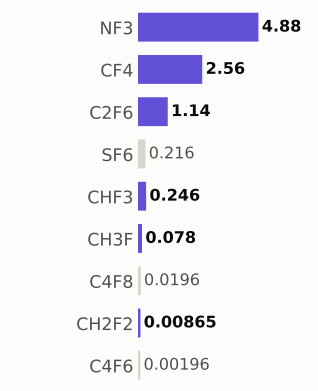

Step #5520: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	391.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




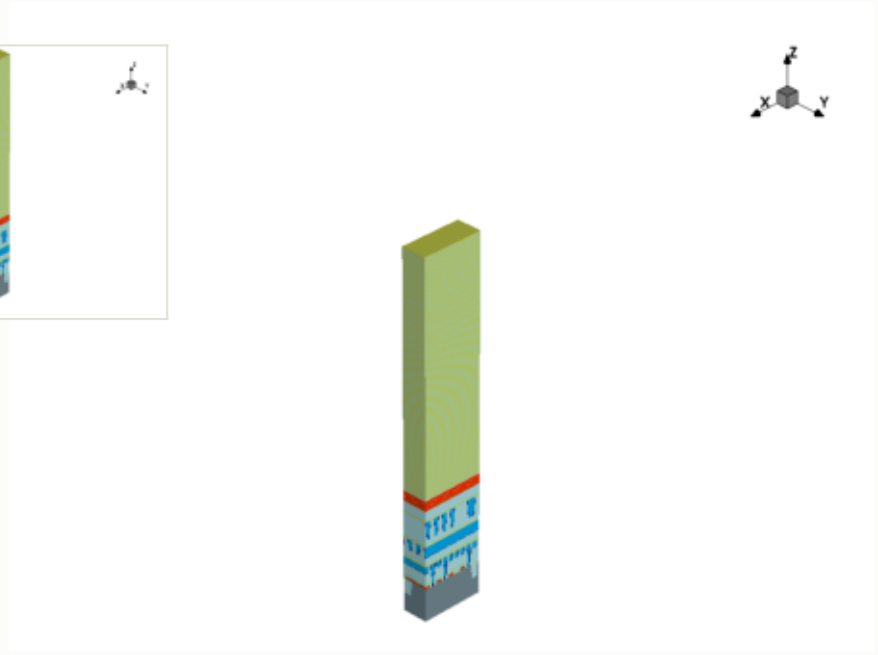

x cut at 0.000 µm

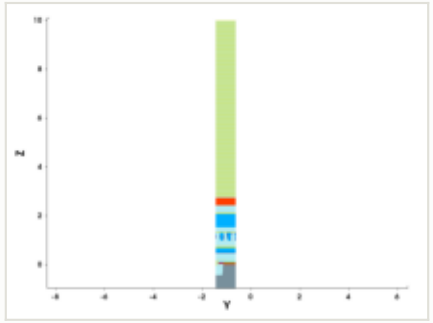

y cut at -1.035 µm

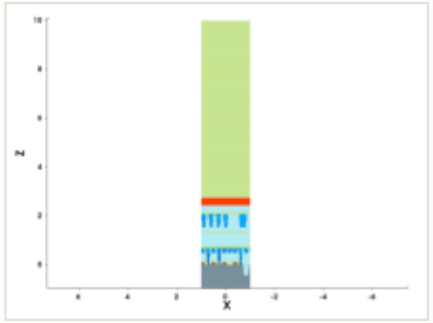


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

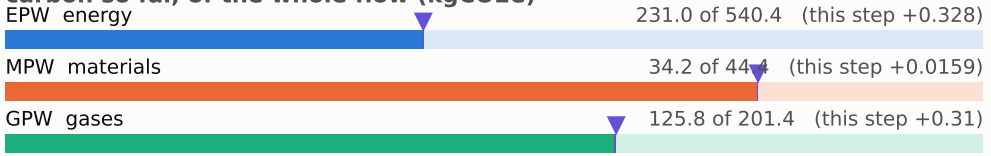

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

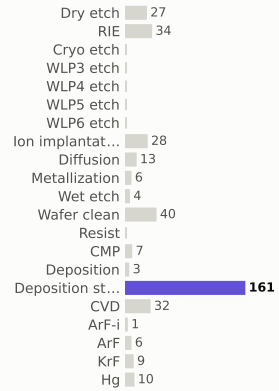

materials deposited (g)



gases emitted (g)

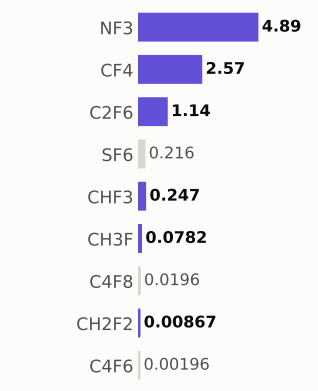

Step #5530: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	391.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




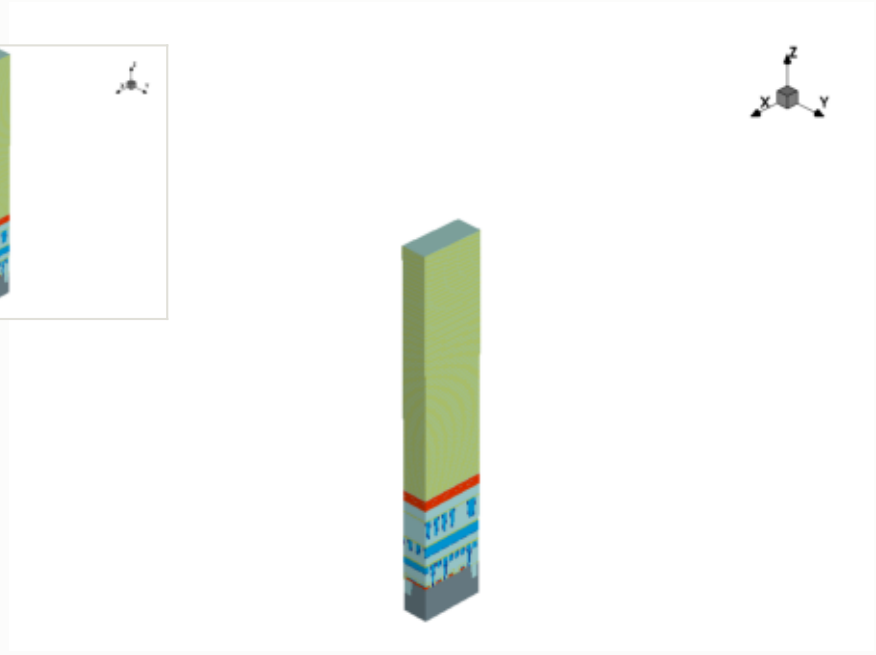

x cut at 0.000 µm

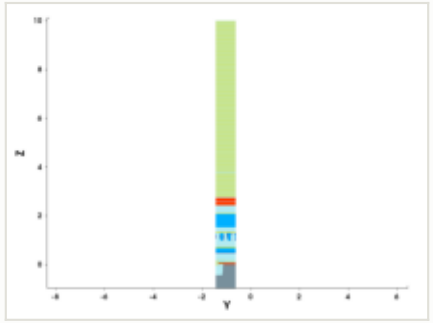

y cut at -1.035 µm

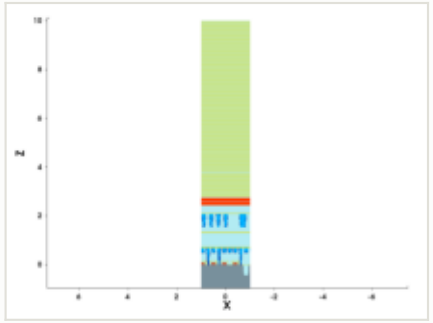


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

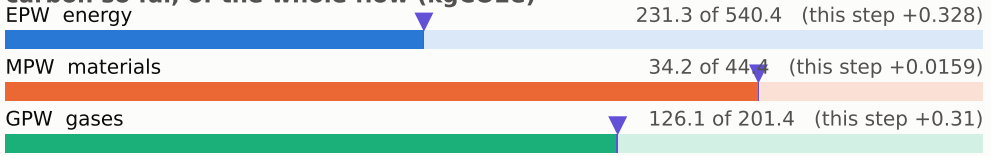

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

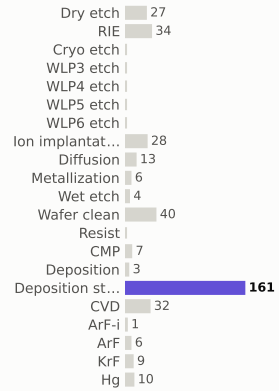

materials deposited (g)



gases emitted (g)




Step #5540: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	392.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

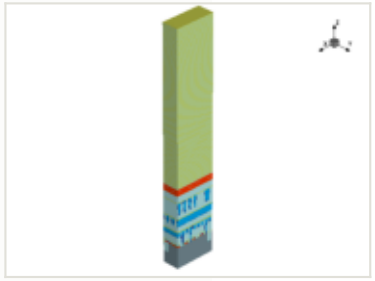


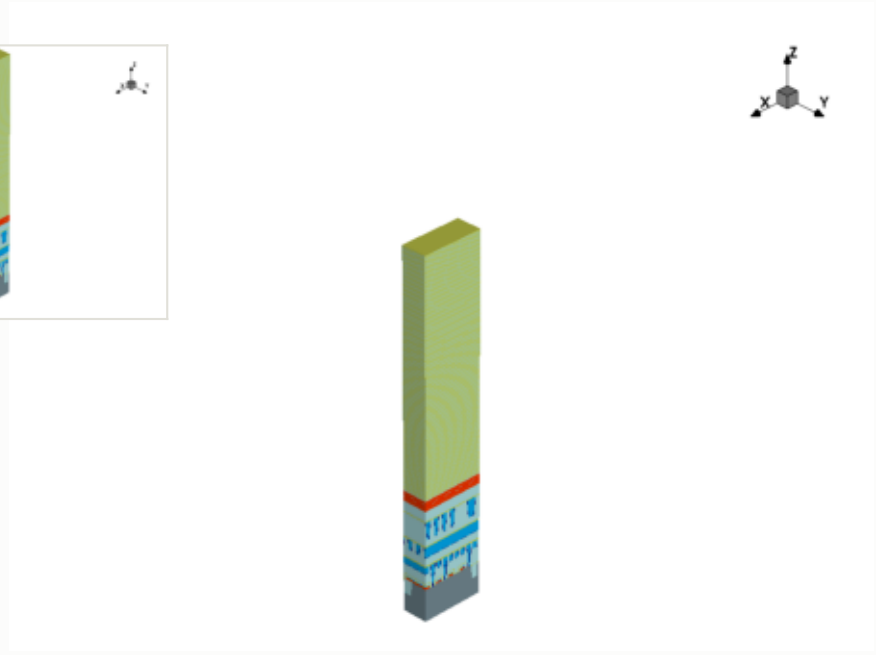

x cut at 0.000 µm

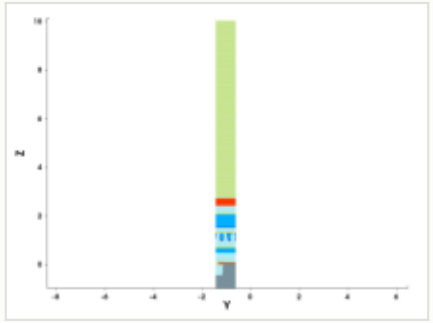

y cut at -1.035 µm

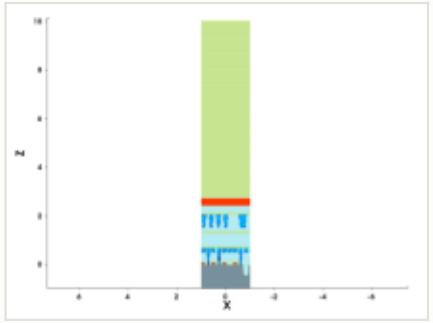

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 231.6 of 540.4 (this step +0.328)


MPW materials — 34.2 of 44.4 (this step +0.0159)

GPW gases — 126.4 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

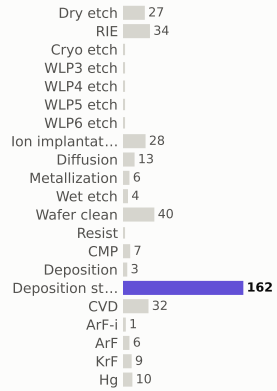

materials deposited (g)

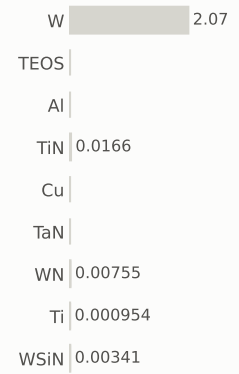

gases emitted (g)



Step #5550: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	392.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




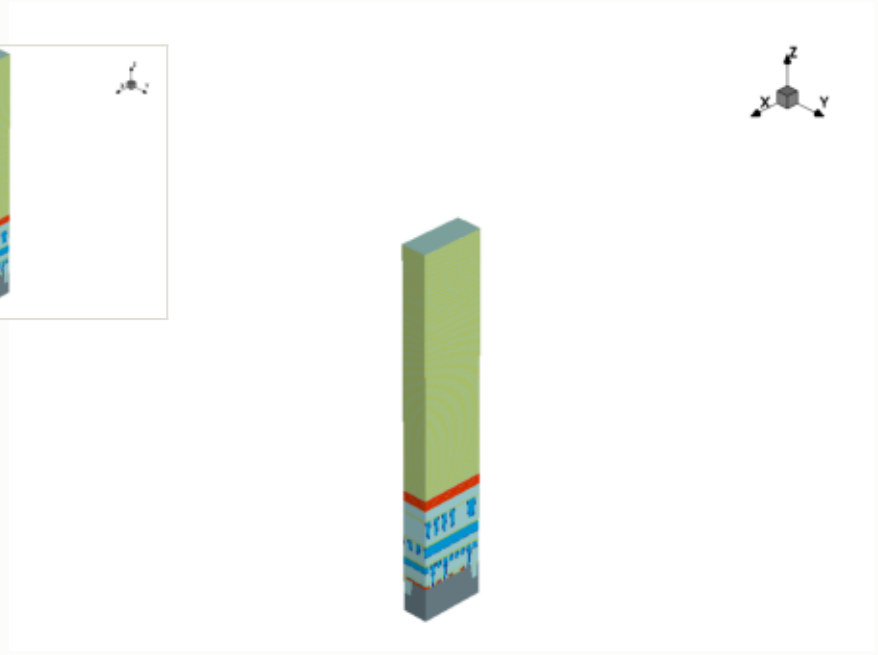


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

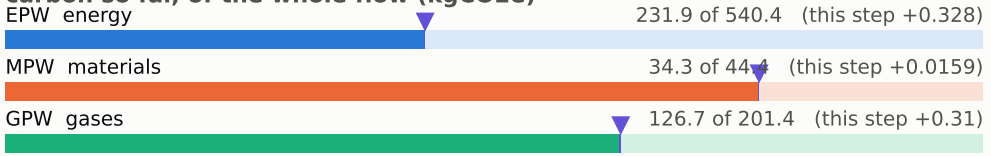


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

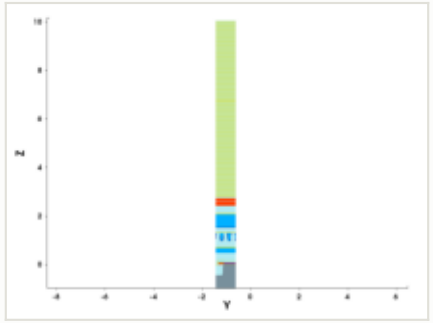


y cut at -1.035 µm

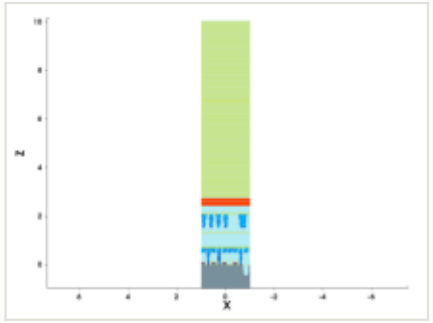


mask for this step

no mask for this step


steps by process area

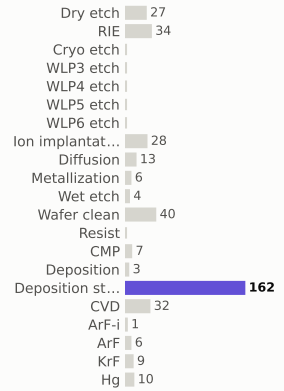

materials deposited (g)



gases emitted (g)




Step #5560: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	393.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

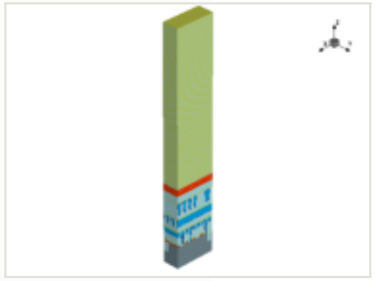


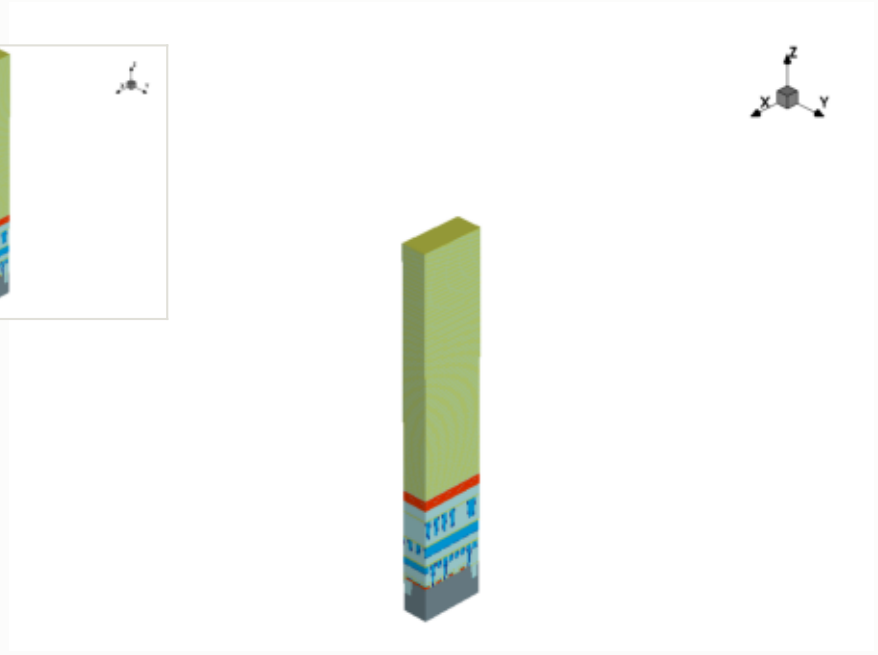


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

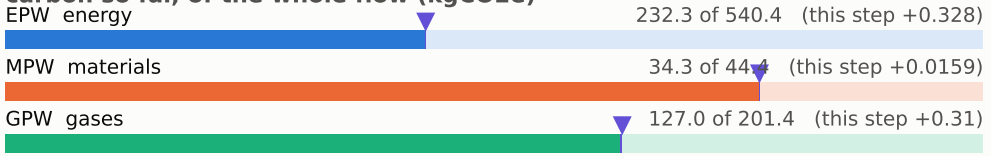


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

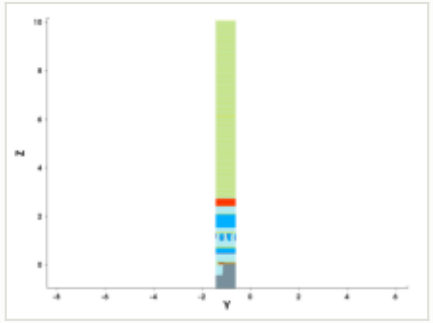


y cut at -1.035 µm

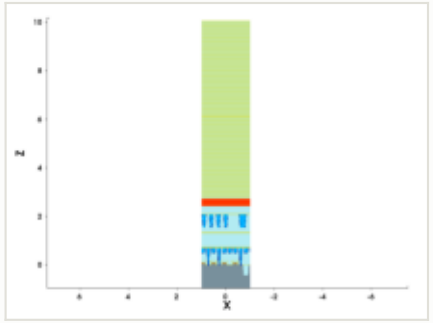


mask for this step

no mask for this step


steps by process area

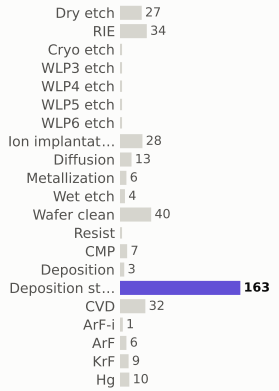

materials deposited (g)

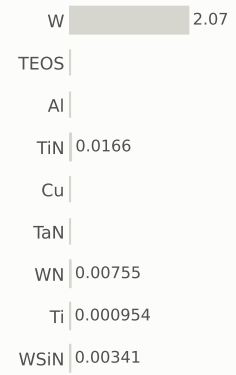

gases emitted (g)

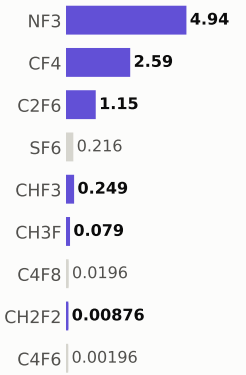


Step #5570: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	394.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

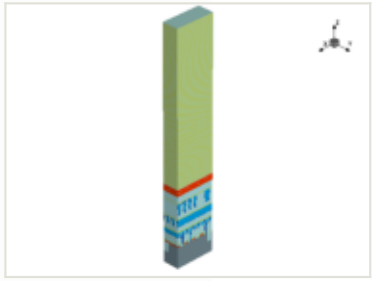




x cut at 0.000 µm

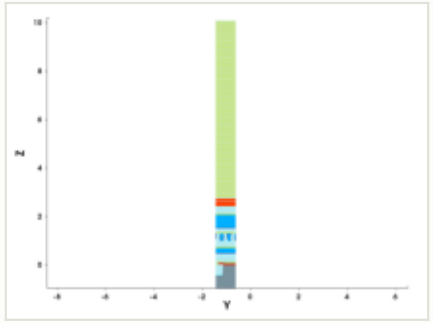

y cut at -1.035 µm

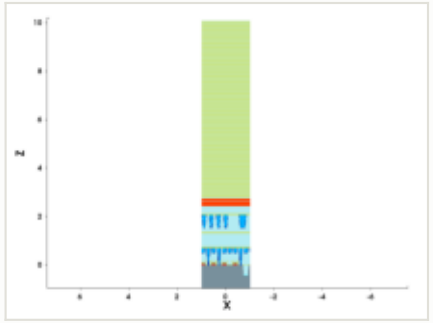


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

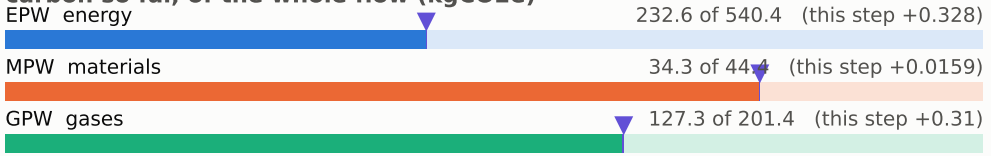

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

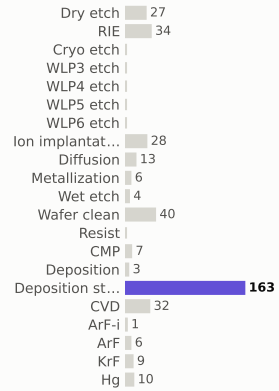

materials deposited (g)



gases emitted (g)



Step #5580: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	394.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




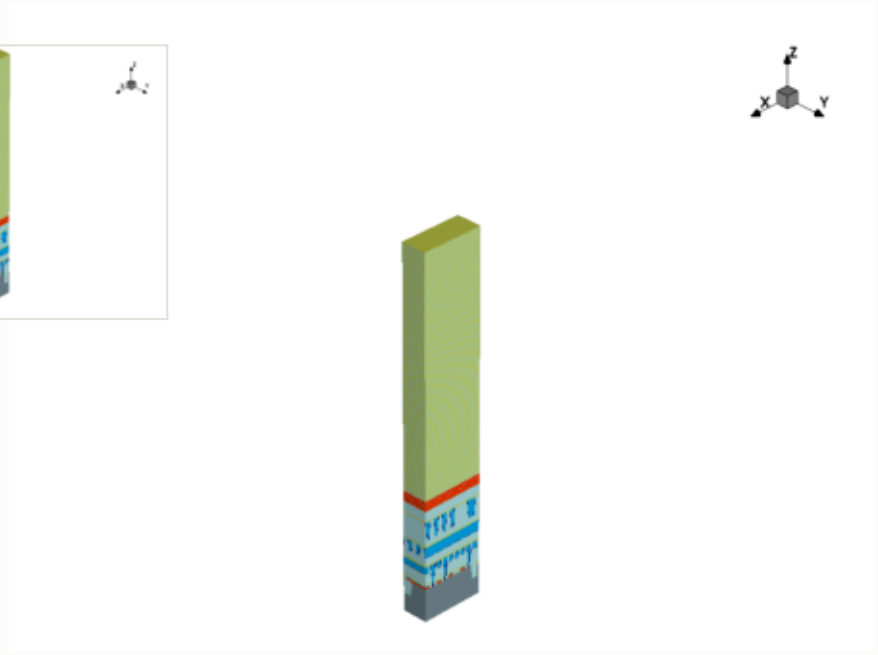

x cut at 0.000 µm

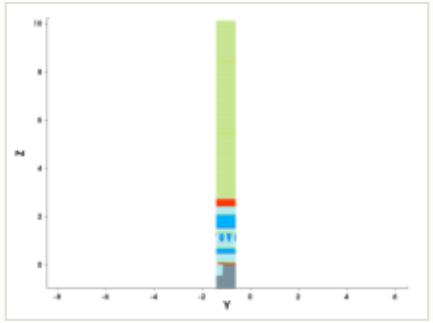

y cut at -1.035 µm

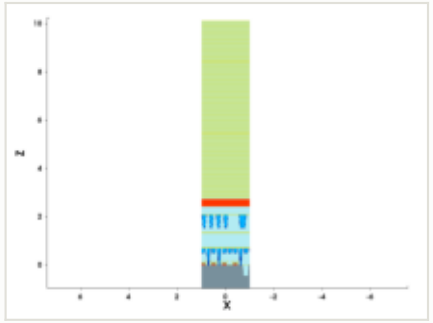


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

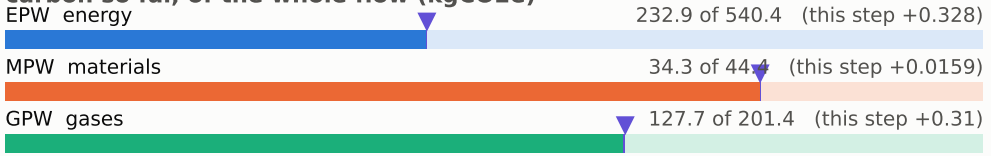


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

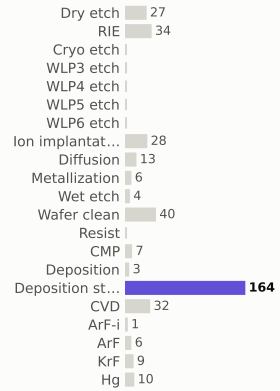

materials deposited (g)

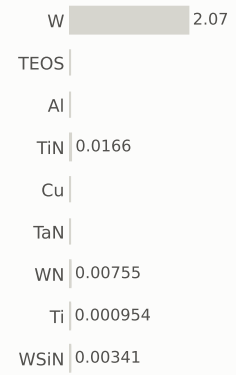

gases emitted (g)



Step #5590: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	395.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




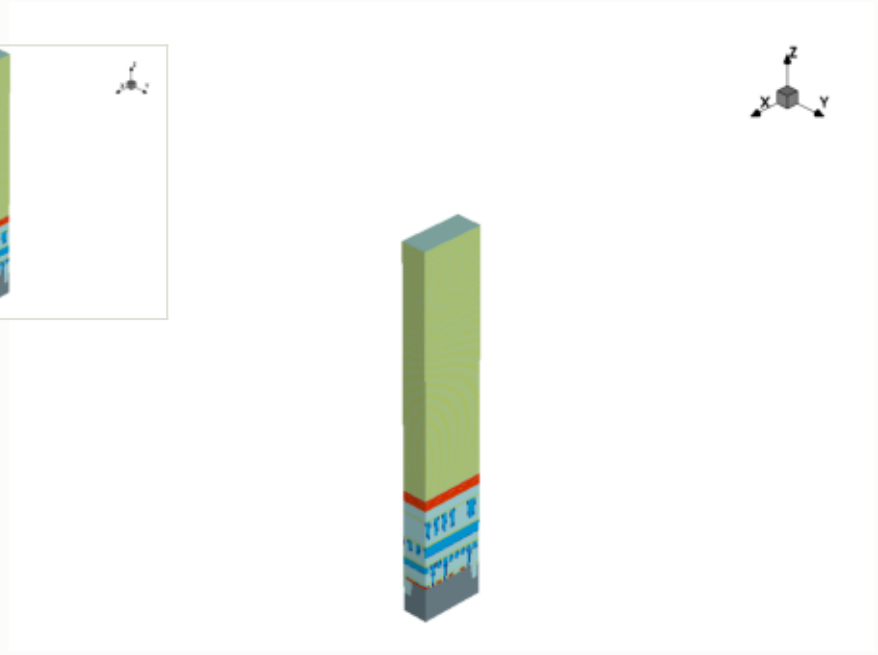


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

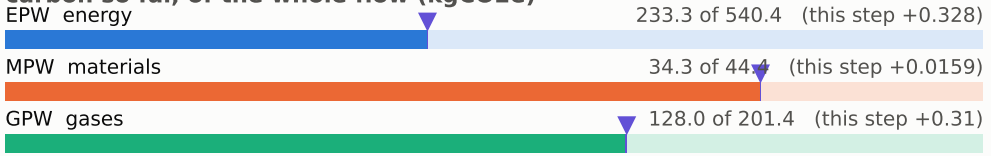


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

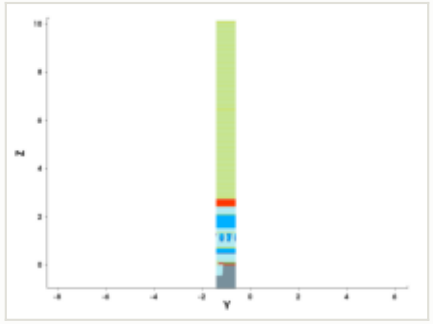


y cut at -1.035 µm

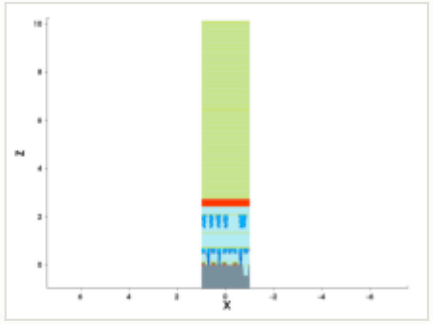


mask for this step

no mask for this step


steps by process area

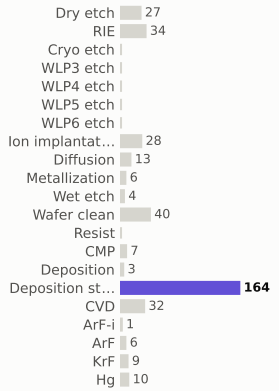

materials deposited (g)

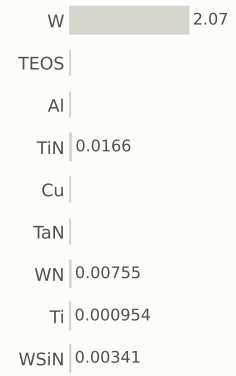

gases emitted (g)

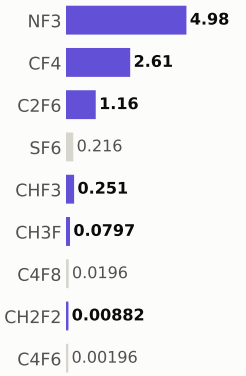


Step #5600: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	396.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

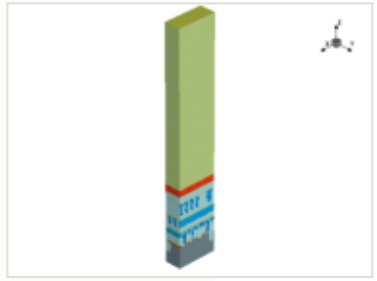


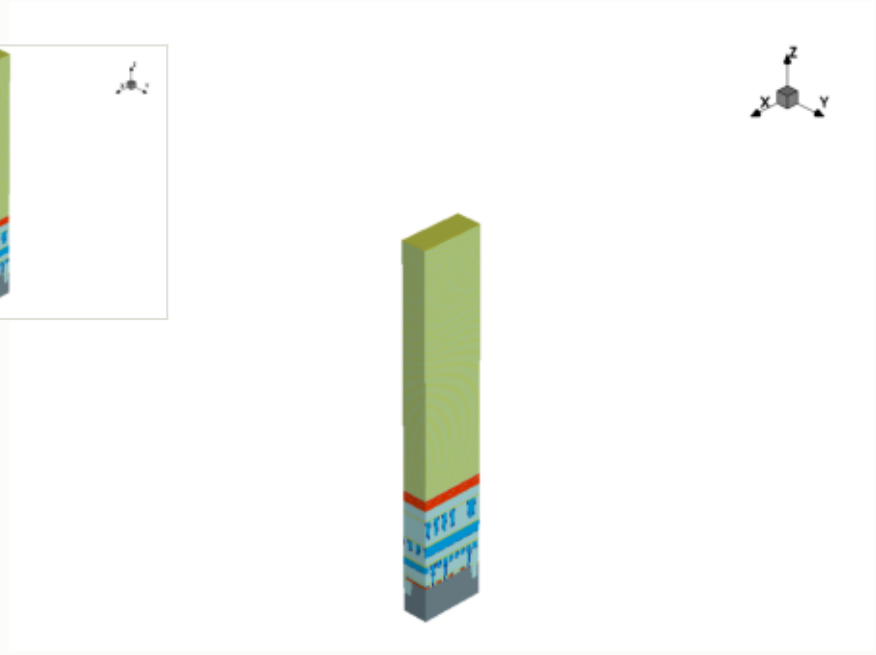

x cut at 0.000 µm

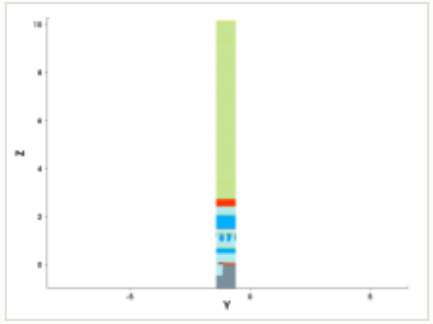

y cut at -1.035 µm

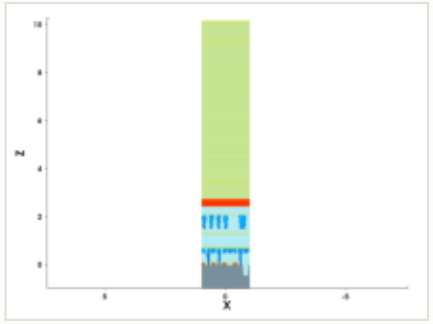


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

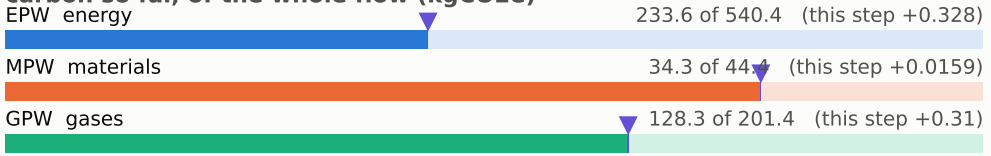

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

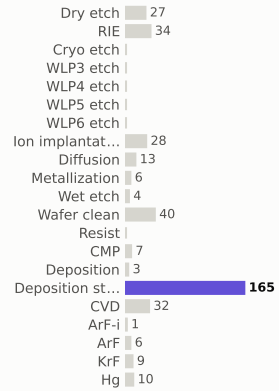

materials deposited (g)



gases emitted (g)

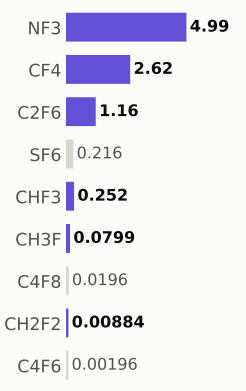

Step #5610: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	396.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




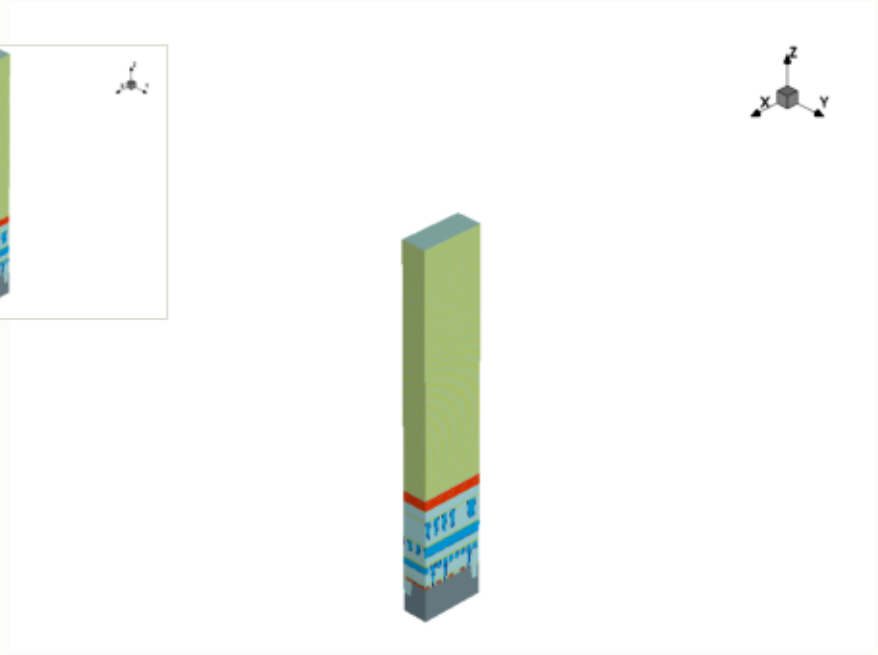

x cut at 0.000 µm

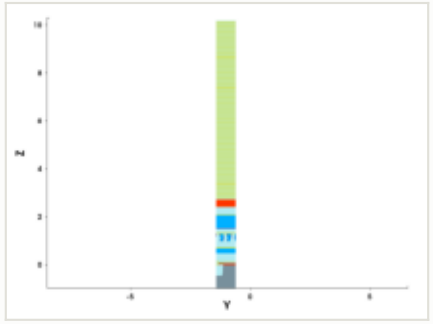

y cut at -1.035 µm

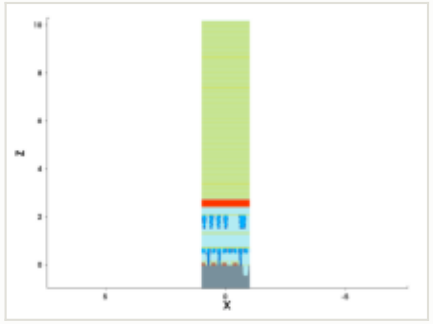


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

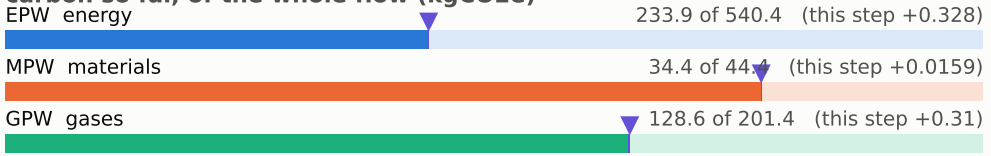

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

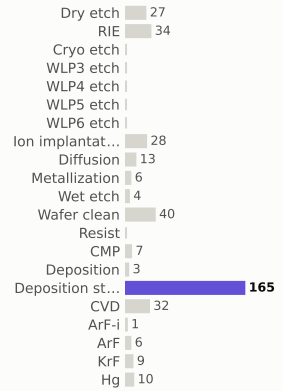

materials deposited (g)



gases emitted (g)

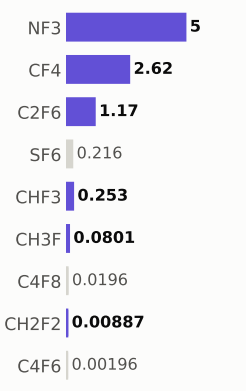

Step #5620: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	397.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




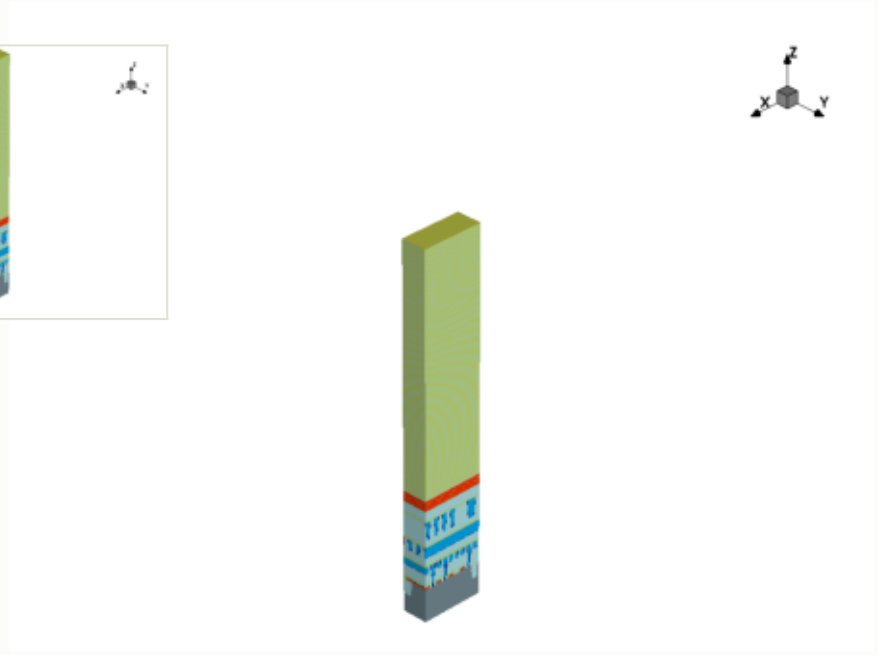

x cut at 0.000 µm

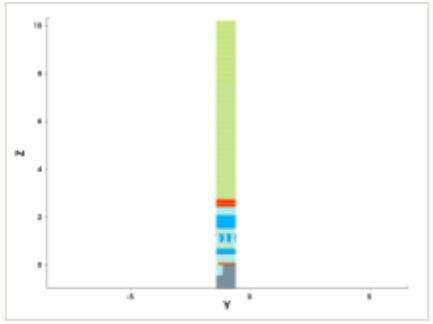

y cut at -1.035 µm

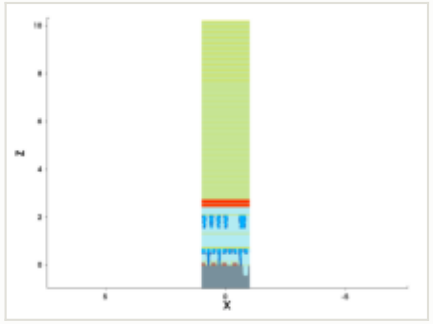


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

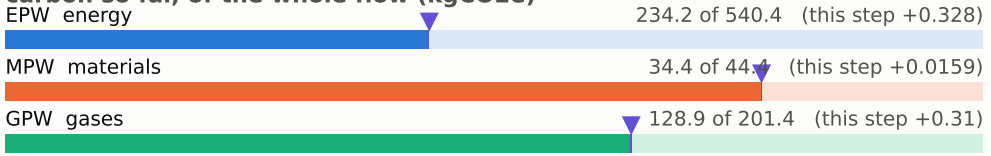


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

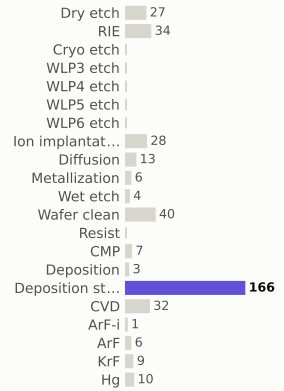

materials deposited (g)

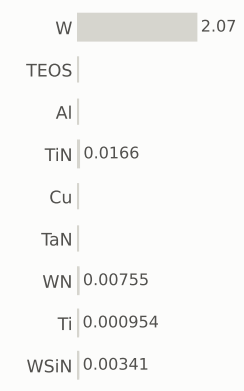

gases emitted (g)




Step #5630: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	398.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

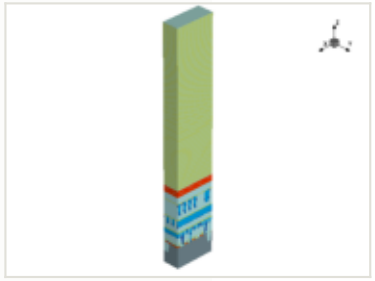


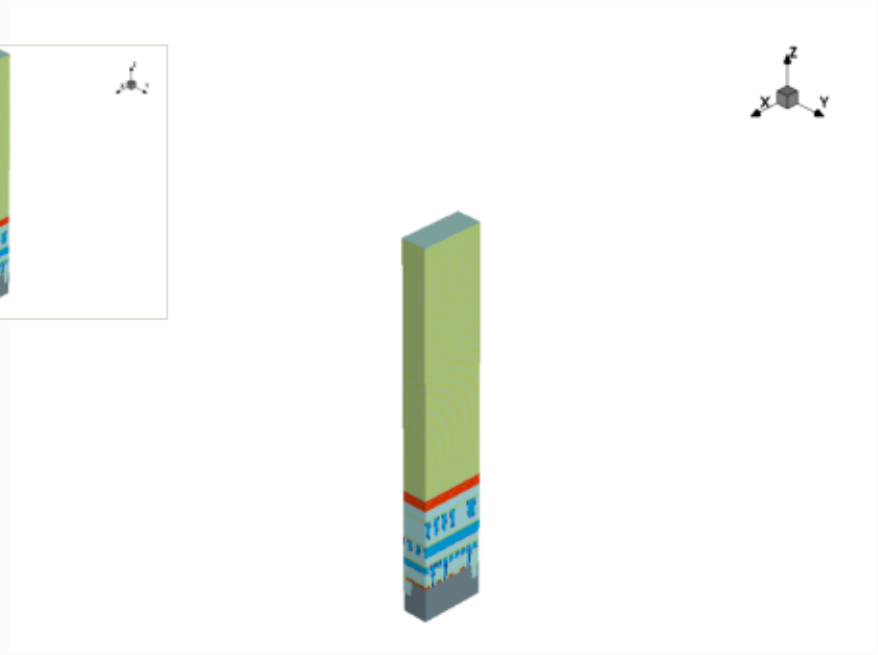

x cut at 0.000 µm

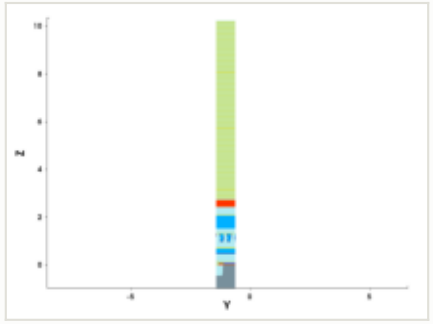

y cut at -1.035 µm

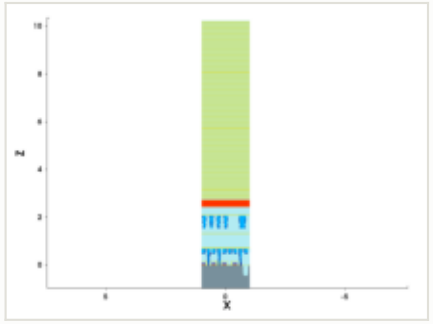


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

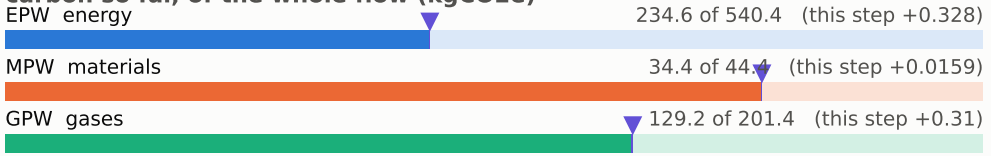

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

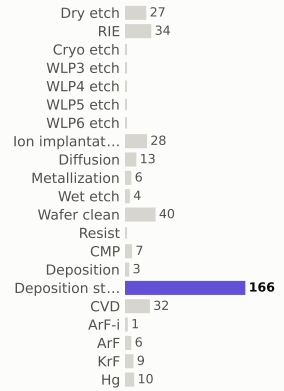

materials deposited (g)



gases emitted (g)

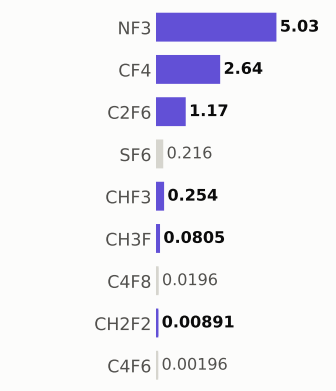

Step #5640: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	398.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




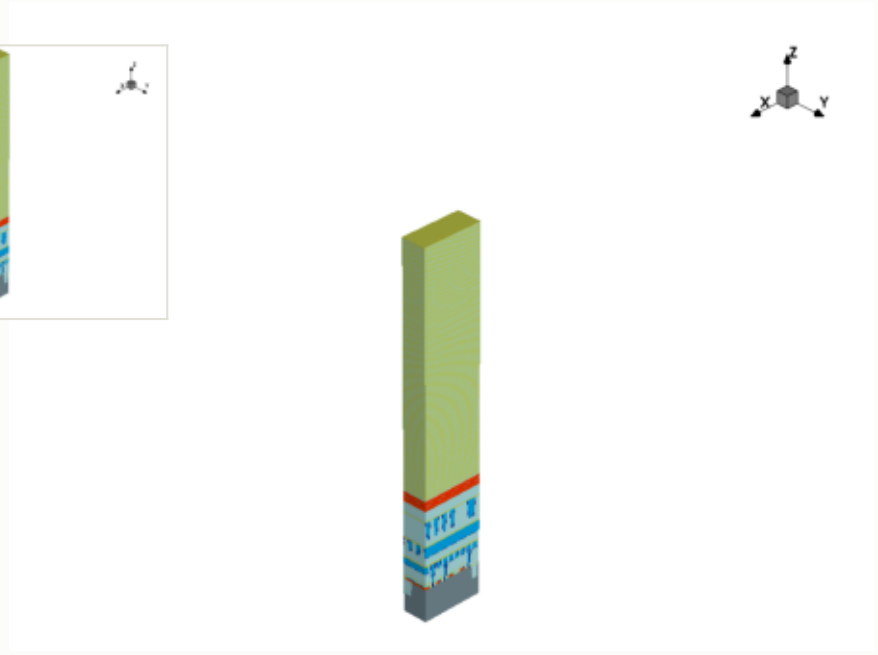

x cut at 0.000 µm

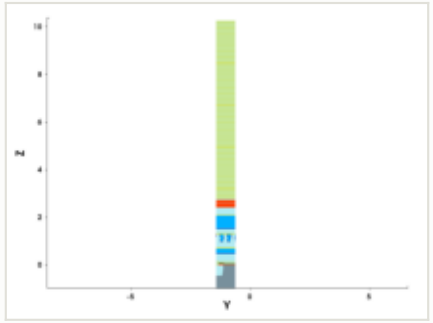

y cut at -1.035 µm

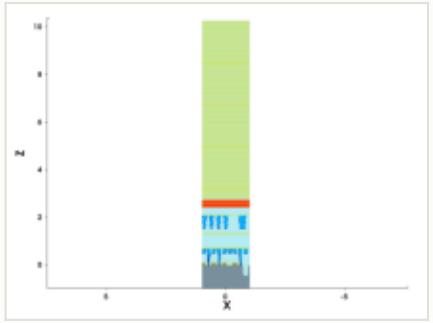


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

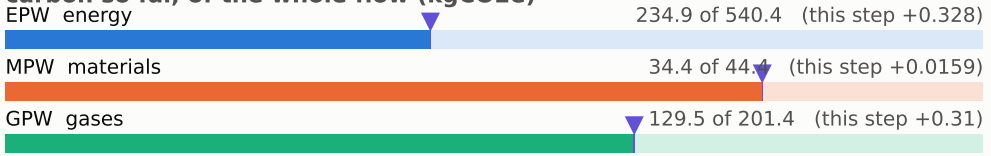


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

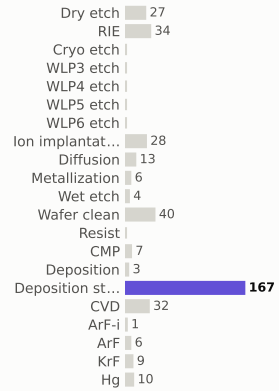

materials deposited (g)

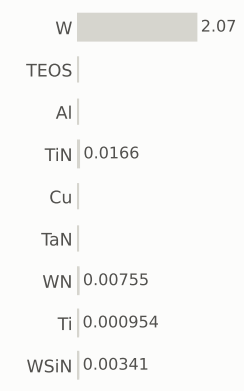

gases emitted (g)

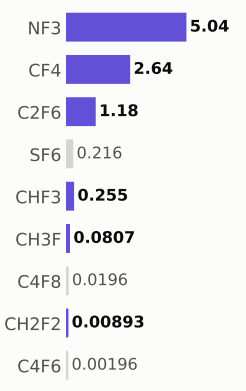


Step #5650: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	399.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

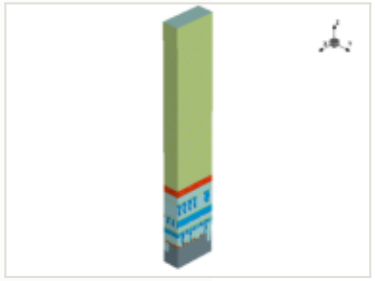


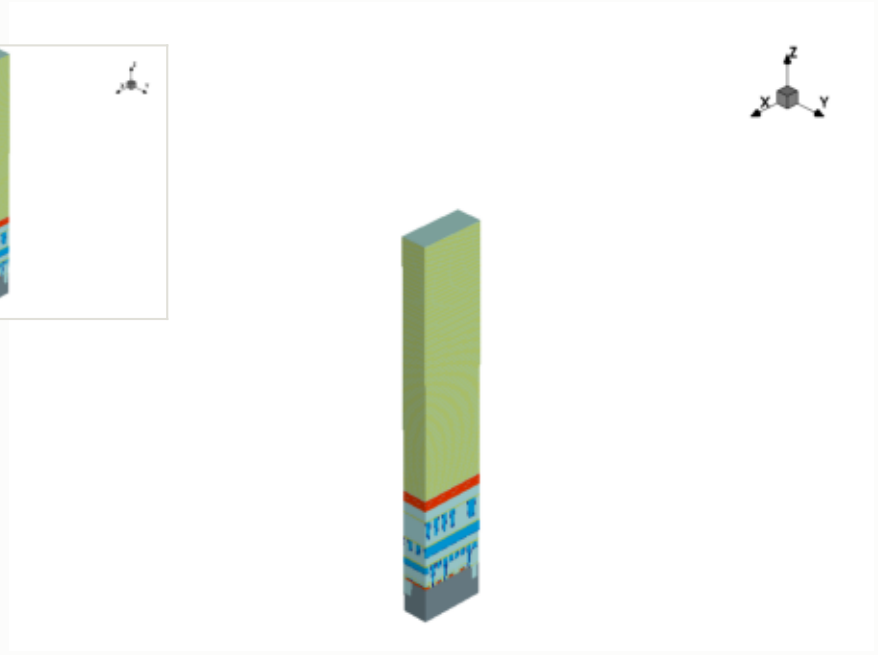

x cut at 0.000 µm

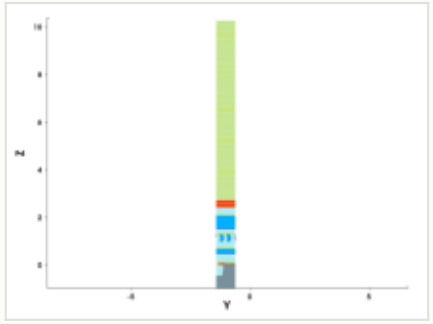

y cut at -1.035 µm

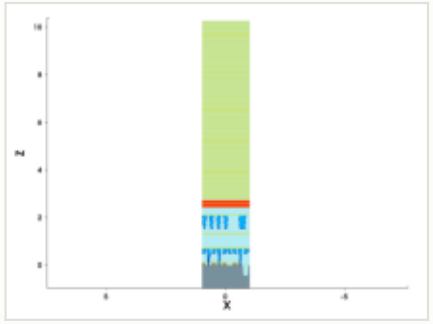


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

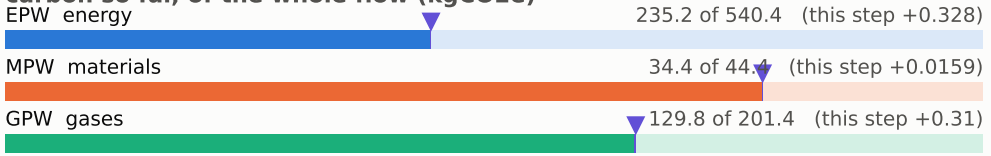


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

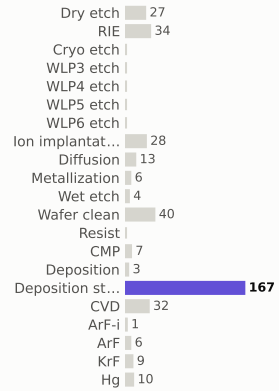

materials deposited (g)

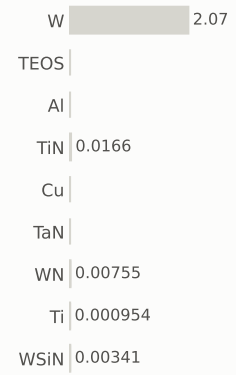

gases emitted (g)

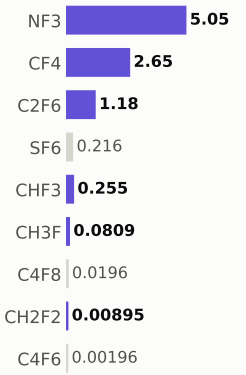


Step #5660: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	400.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

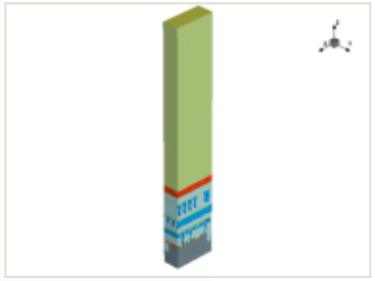


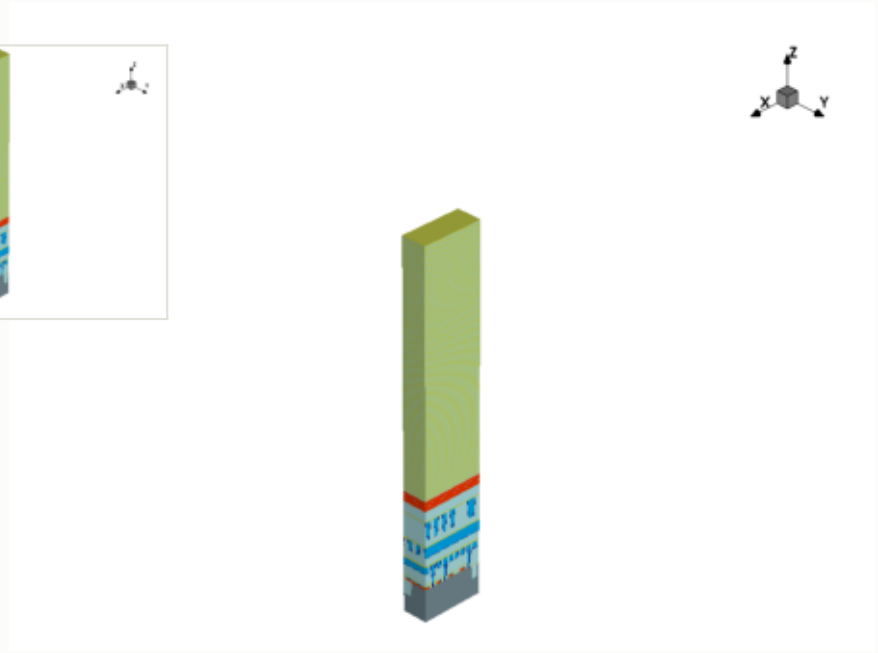

x cut at 0.000 µm

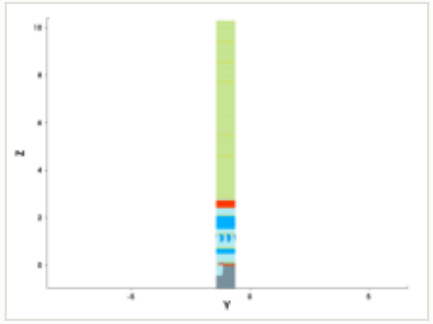

y cut at -1.035 µm

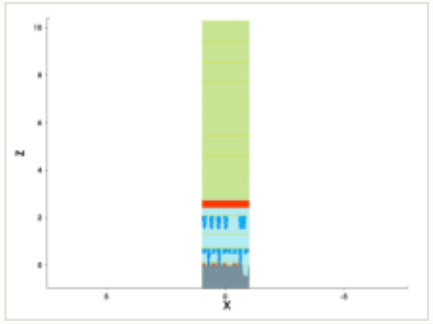


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

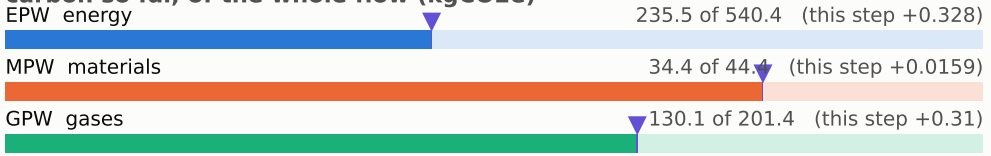


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

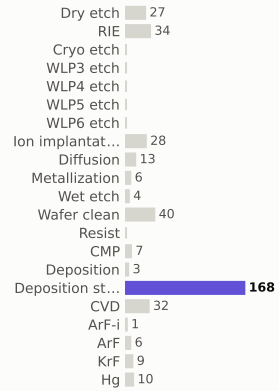

materials deposited (g)

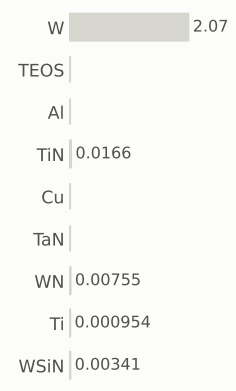

gases emitted (g)




Step #5670: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	400.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

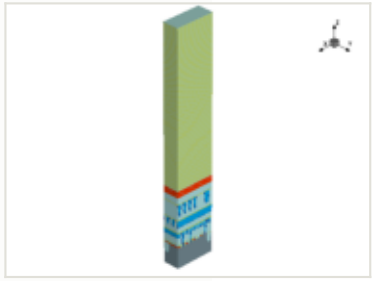


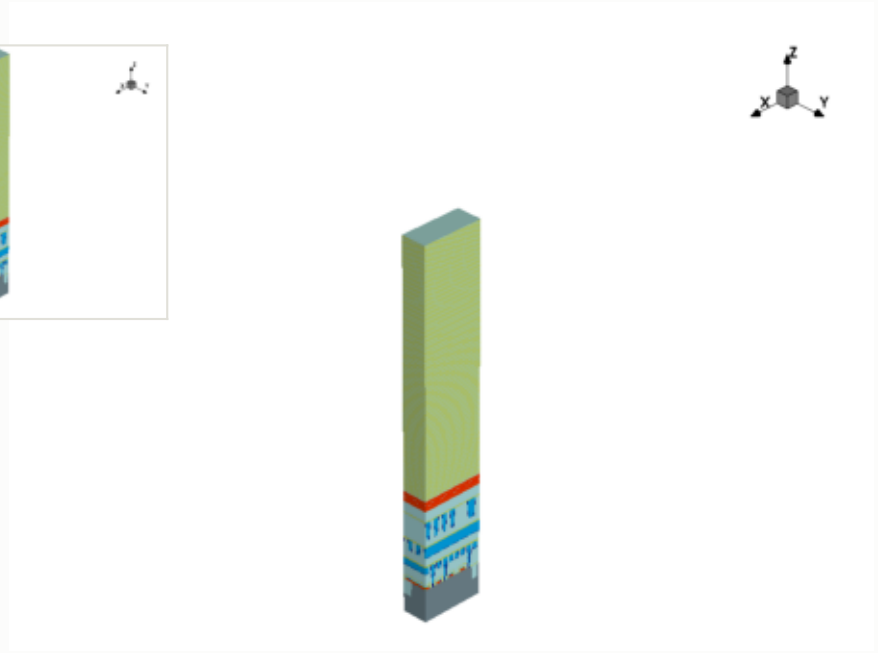

x cut at 0.000 µm

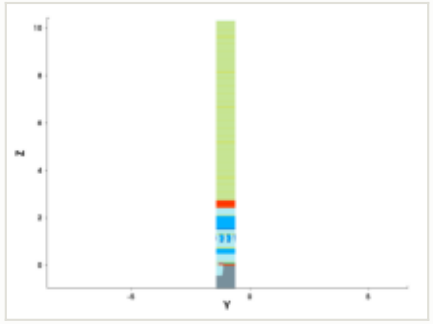

y cut at -1.035 µm

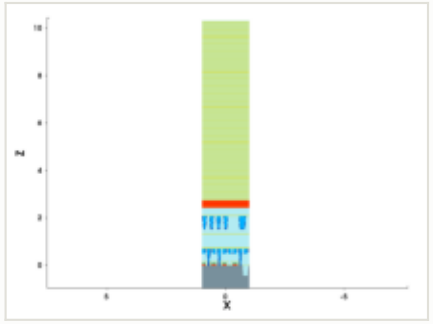


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

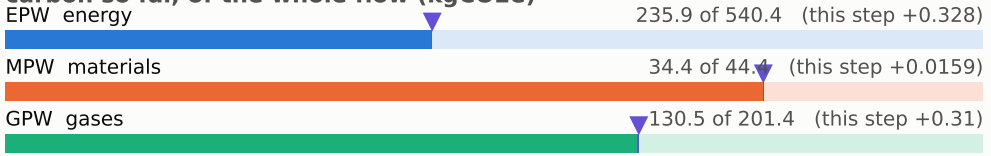


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

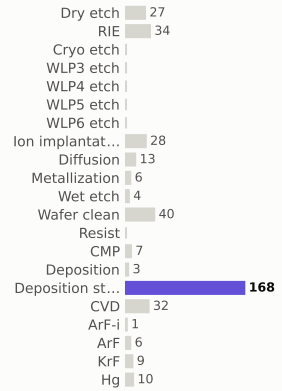

materials deposited (g)

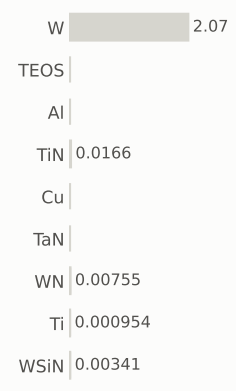

gases emitted (g)




Step #5680: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	401.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

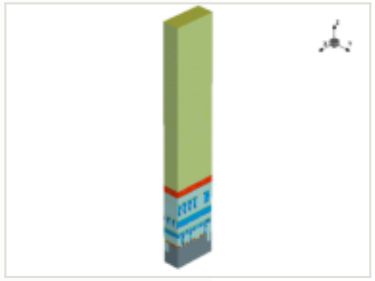


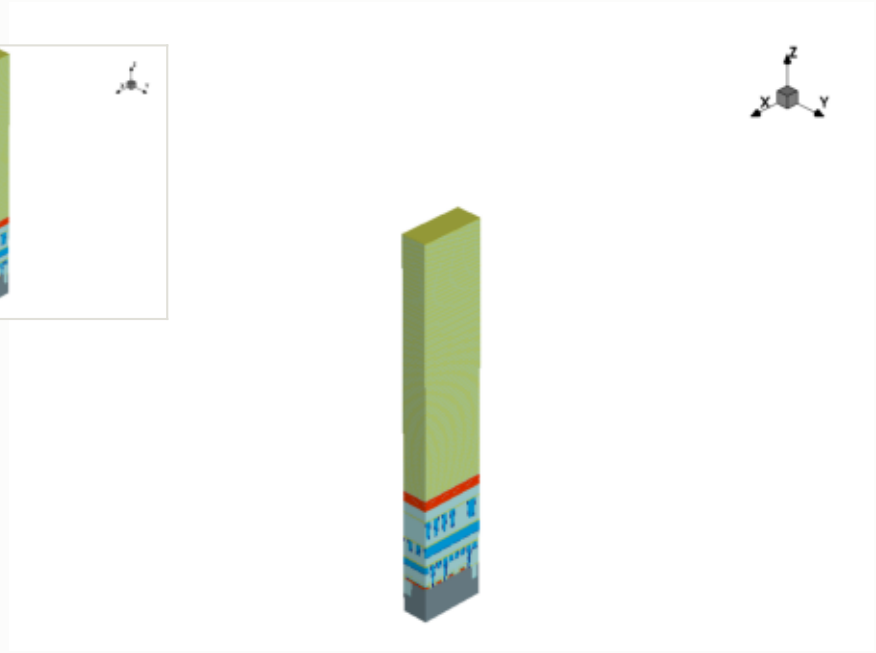

x cut at 0.000 µm

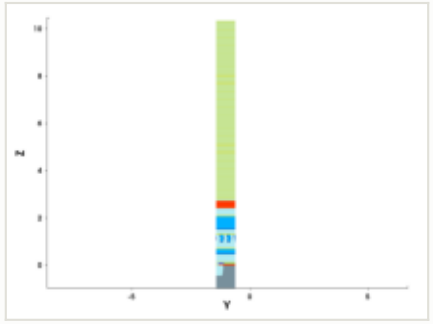

y cut at -1.035 µm

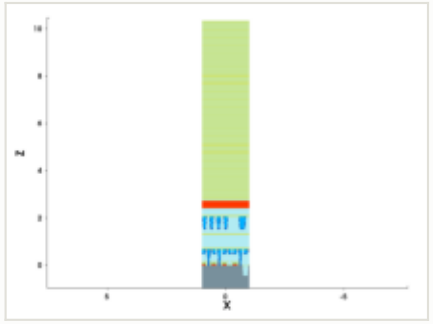


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

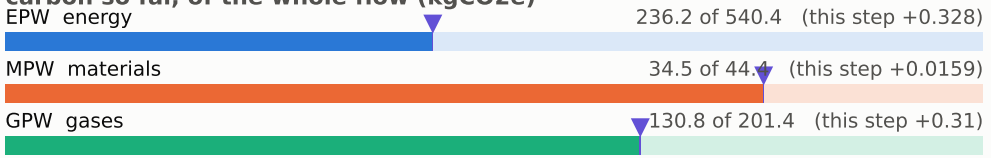


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

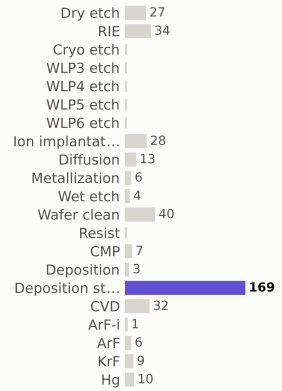

materials deposited (g)

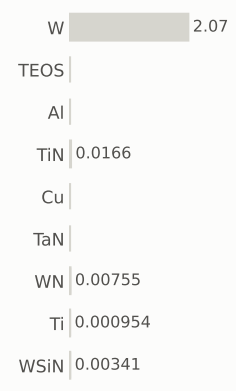

gases emitted (g)




Step #5690: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	402.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

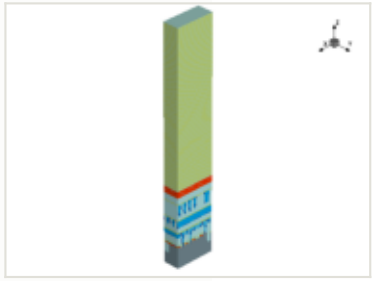


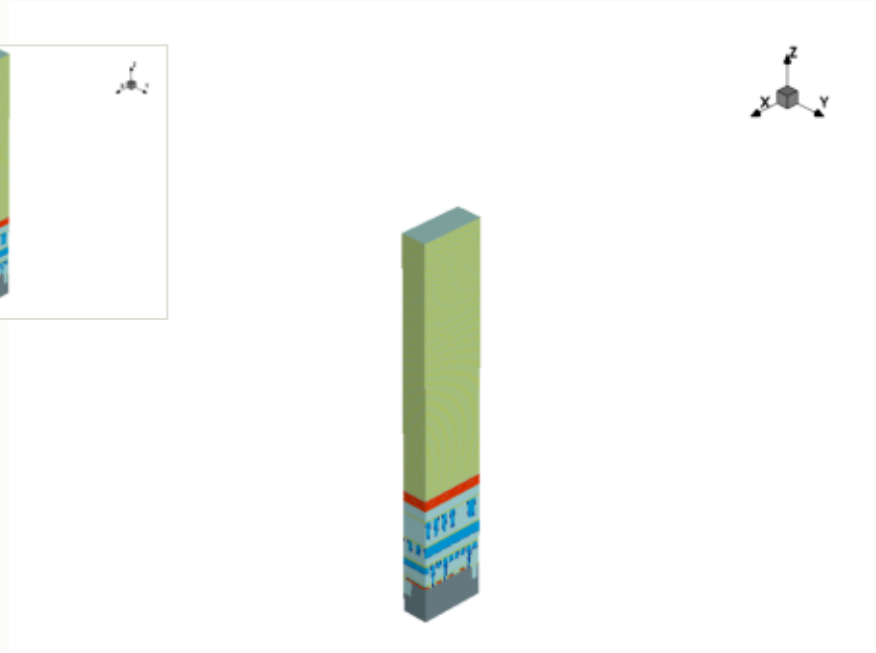


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

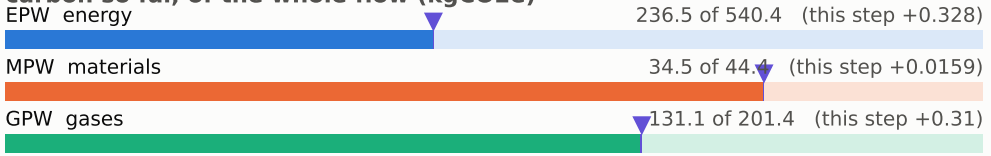


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

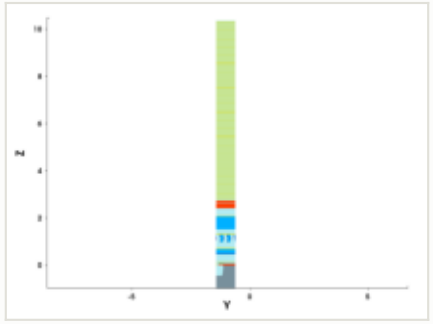


y cut at -1.035 µm

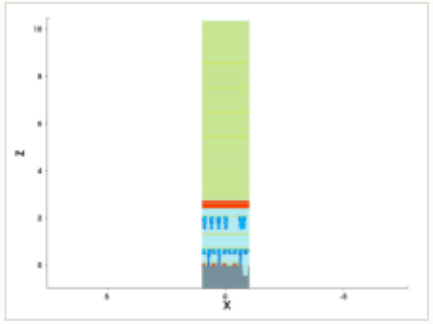


mask for this step

no mask for this step


steps by process area

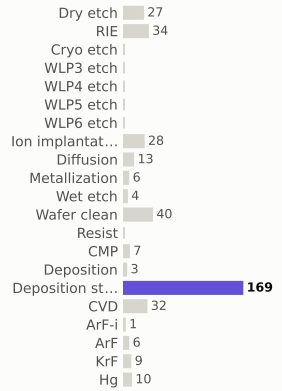

materials deposited (g)

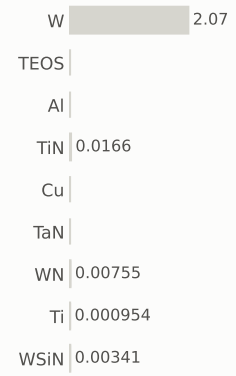

gases emitted (g)




Step #5700: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	402.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

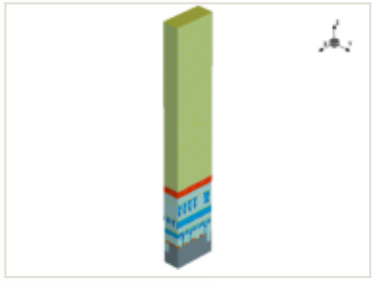


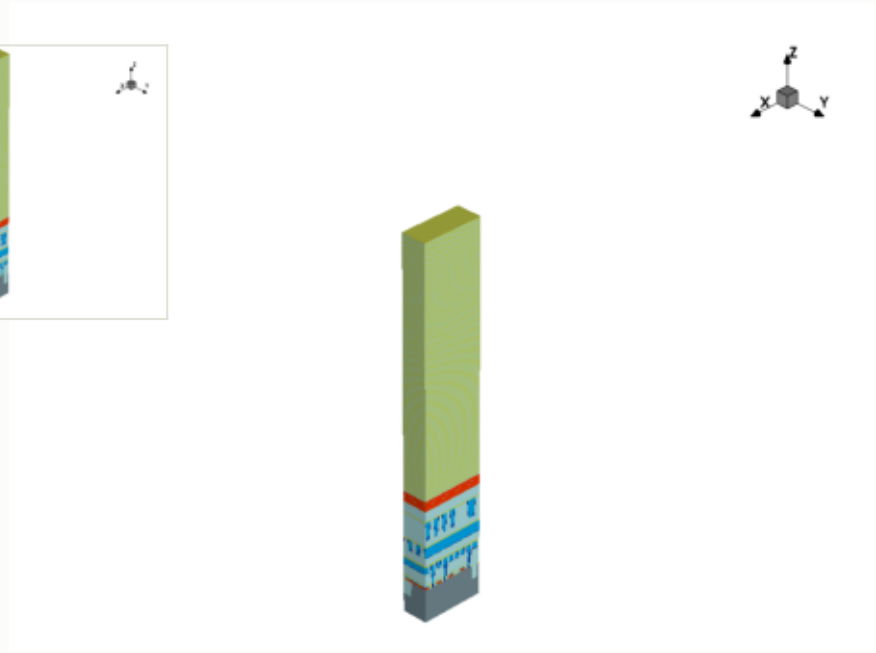

x cut at 0.000 µm

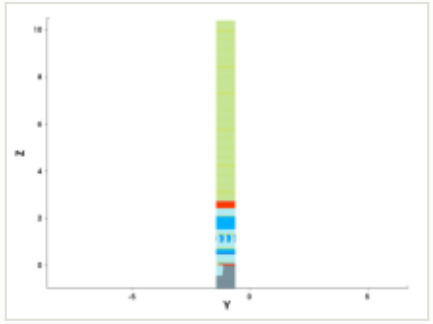

y cut at -1.035 µm

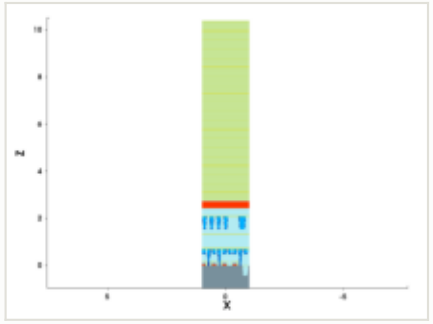


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

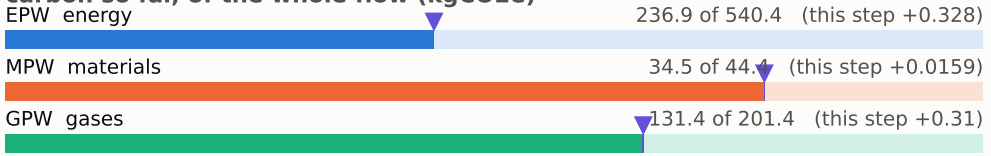

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

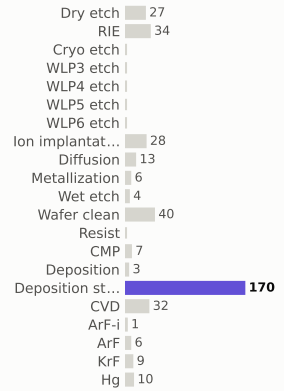

materials deposited (g)



gases emitted (g)




Step #5710: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	403.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

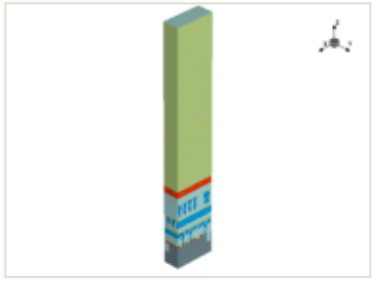


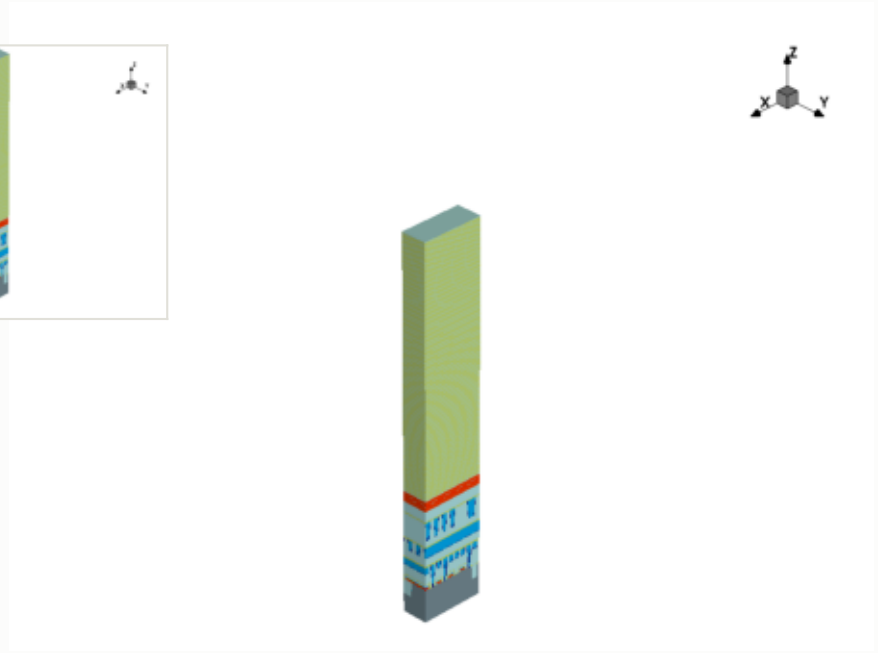


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

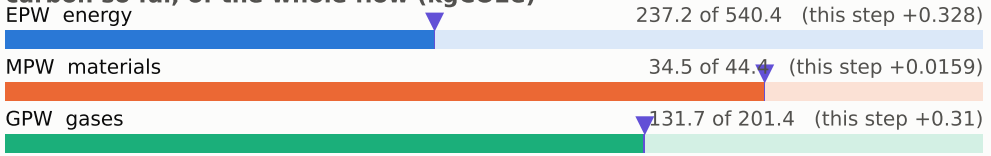


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

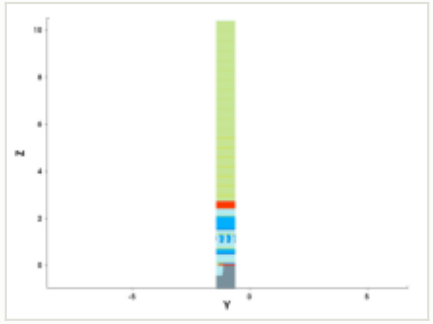


y cut at -1.035 µm

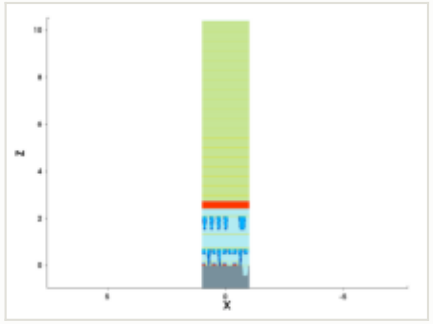

mask for this step

no mask for this step


steps by process area

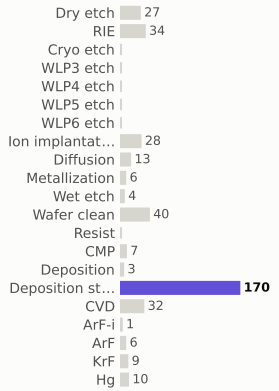

materials deposited (g)



gases emitted (g)




Step #5720: Deposition_stack

depo_anisotropic · Deposition_stack

0.654	404.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

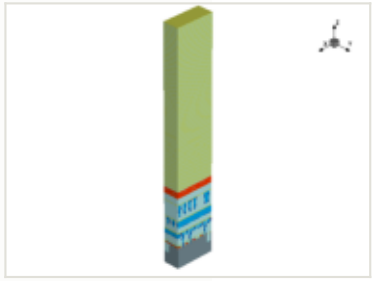





this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

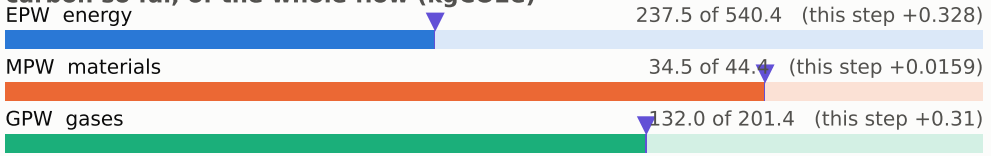


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

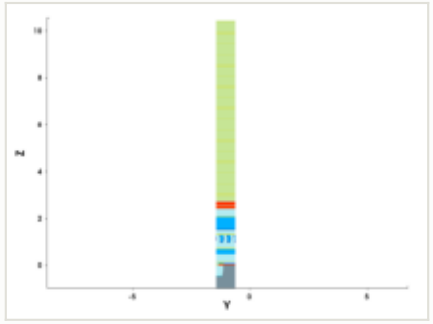


y cut at -1.035 µm

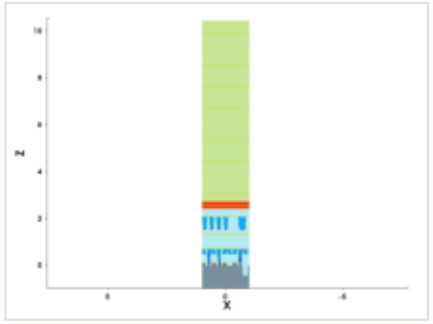

mask for this step

no mask for this step


steps by process area



materials deposited (g)



gases emitted (g)



Step #5730: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	404.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




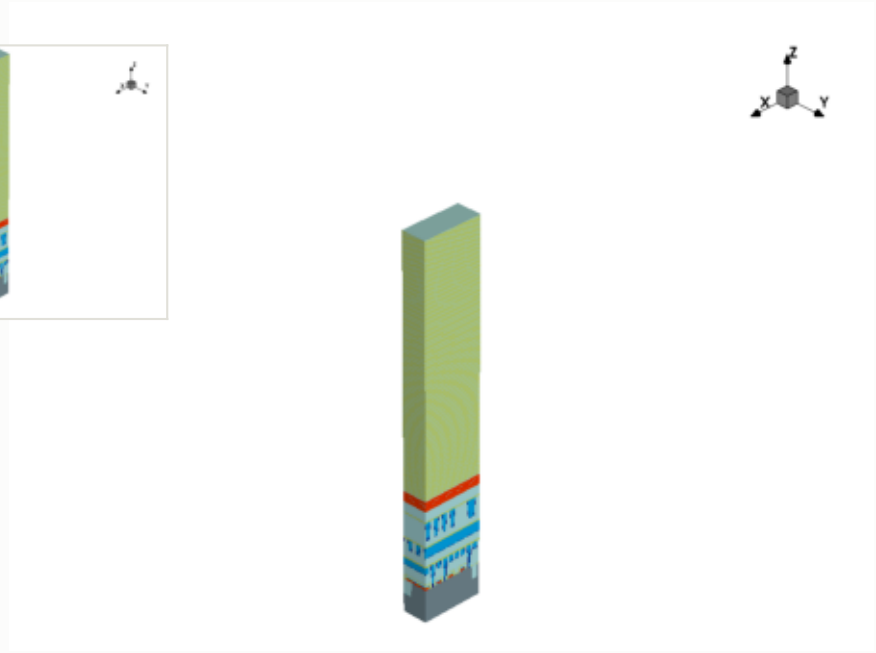


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

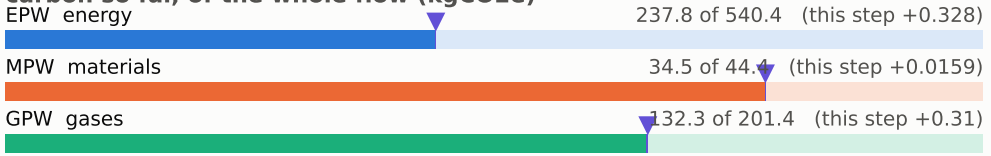


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

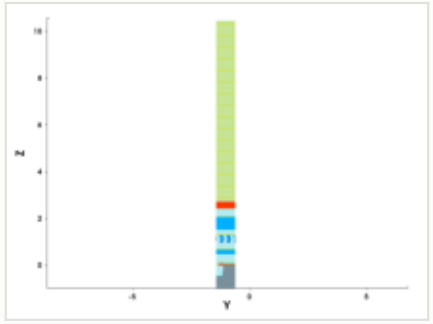


y cut at -1.035 µm

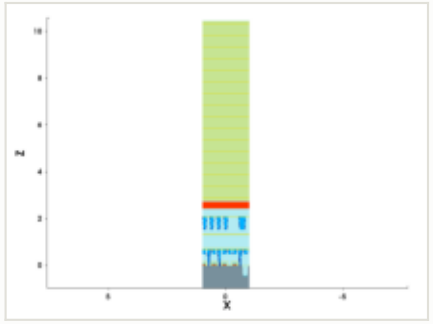


mask for this step

no mask for this step


steps by process area

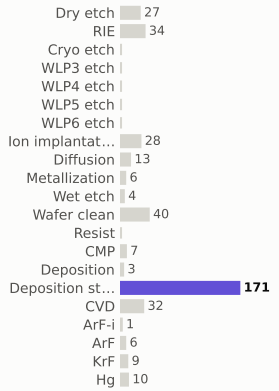

materials deposited (g)

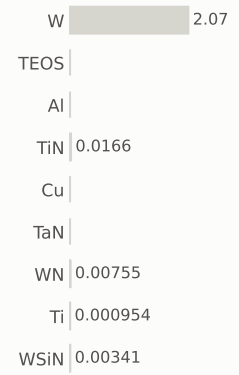

gases emitted (g)




Step #5740: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	405.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

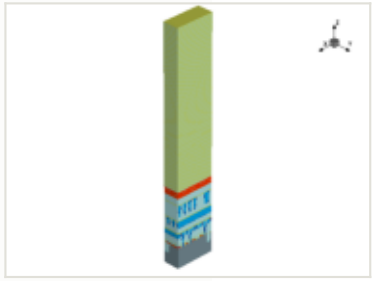


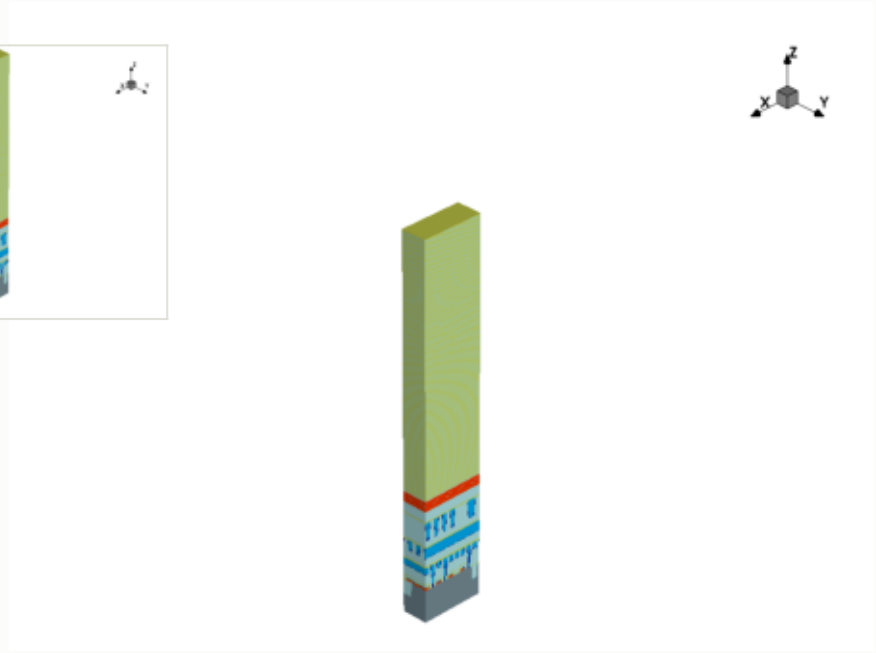

x cut at 0.000 µm

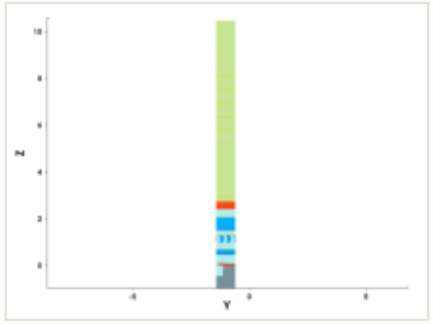

y cut at -1.035 µm

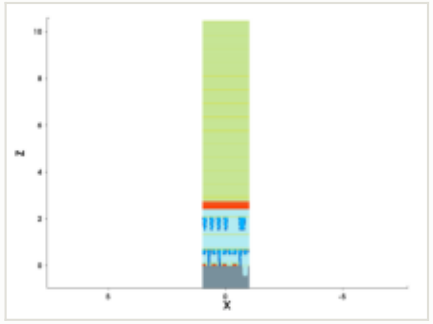


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

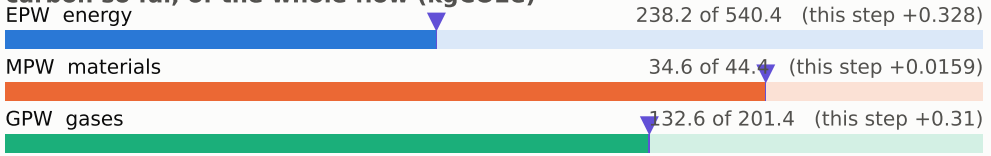


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

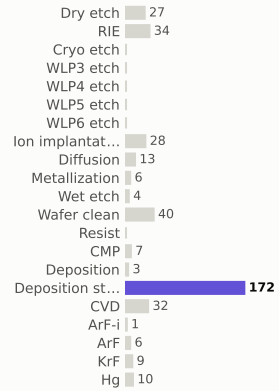

materials deposited (g)

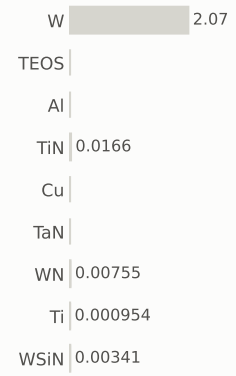

gases emitted (g)

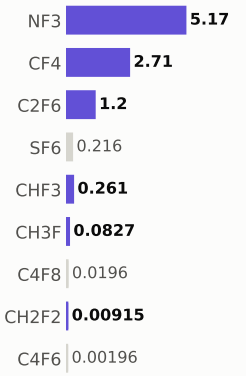


Step #5750: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	406.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

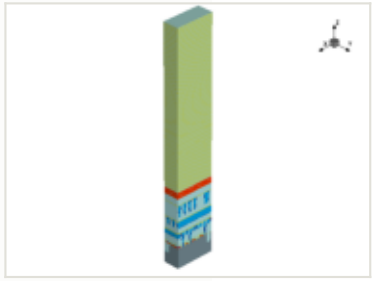


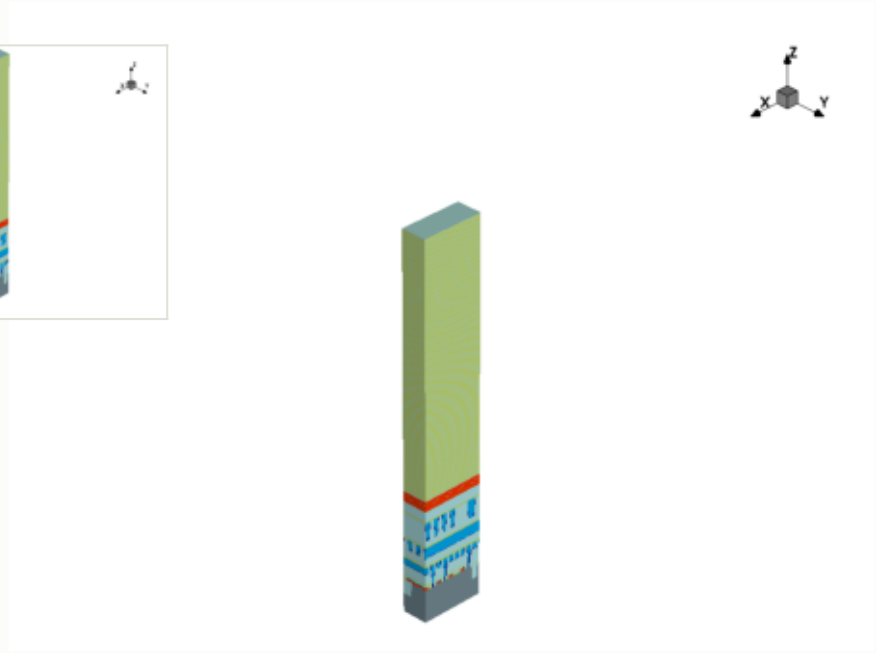

x cut at 0.000 µm

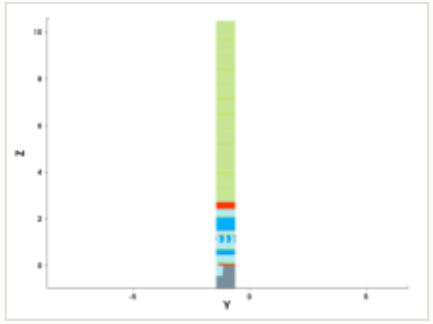

y cut at -1.035 µm

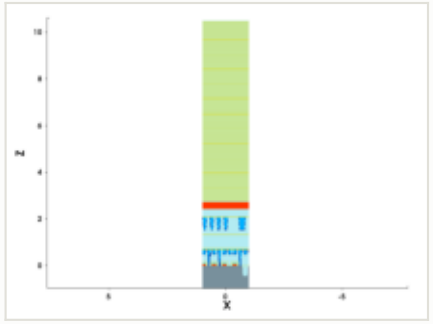


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

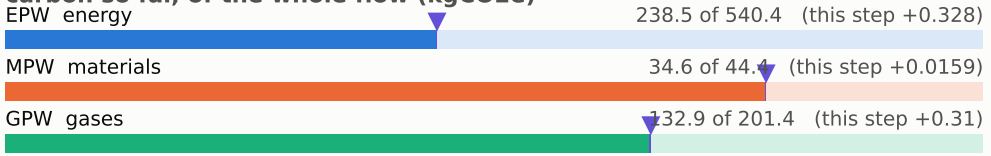

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

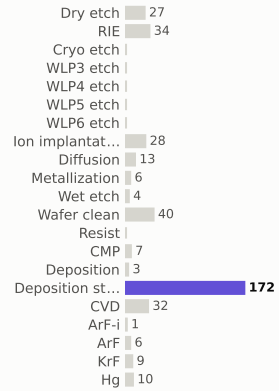

materials deposited (g)



gases emitted (g)

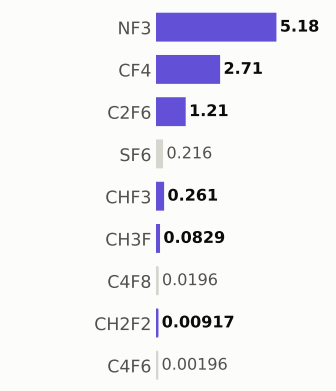


Step #5760: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	406.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

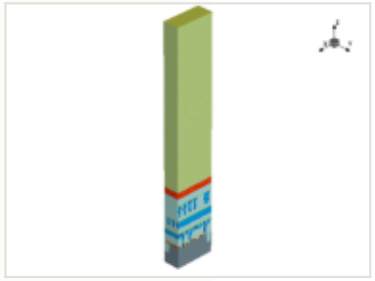


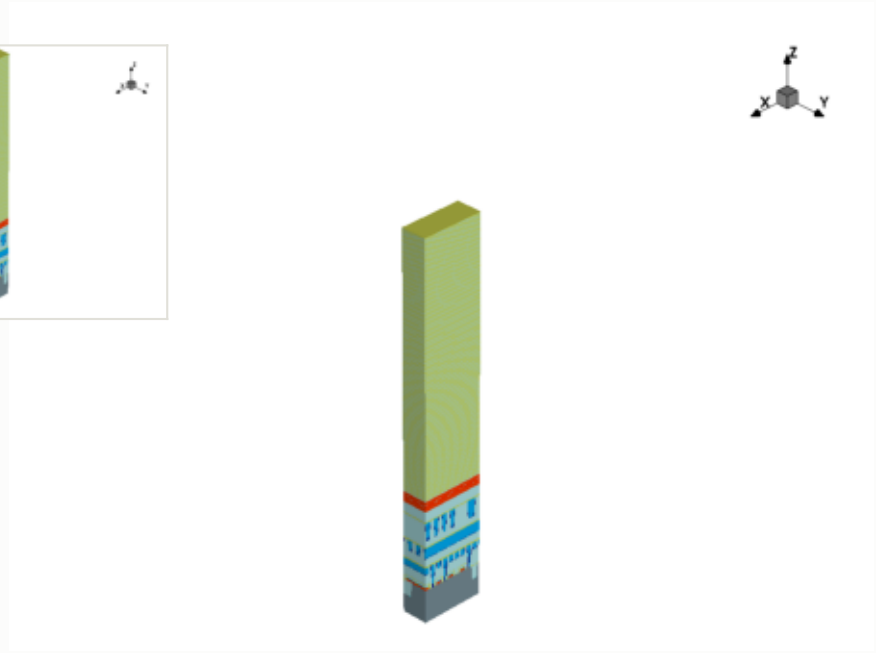

x cut at 0.000 µm

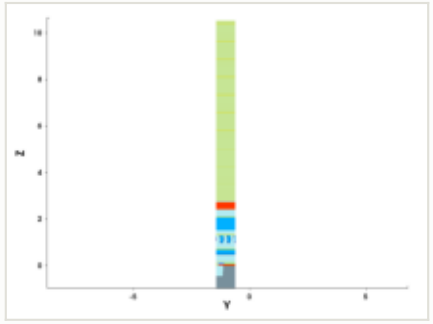

y cut at -1.035 µm

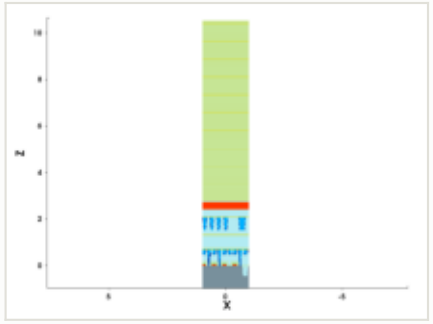


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

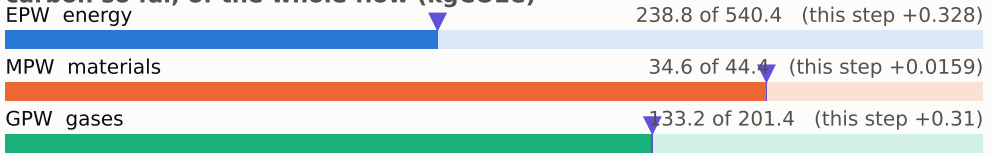

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

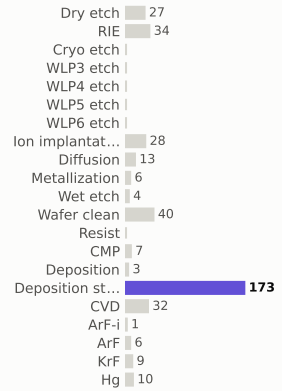

materials deposited (g)



gases emitted (g)




Step #5770: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	407.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

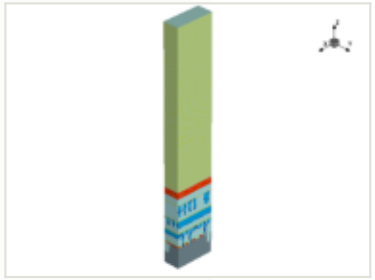


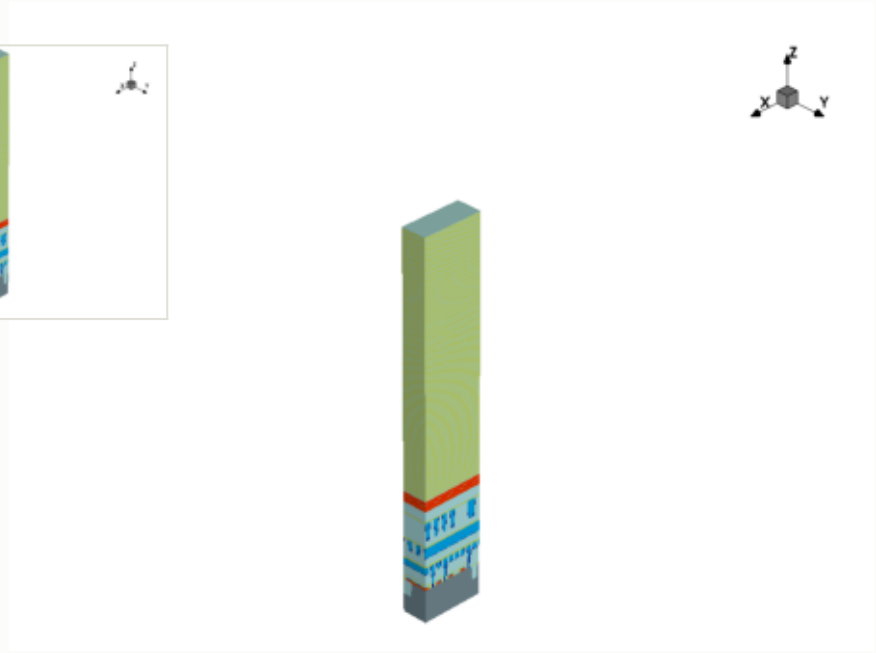

x cut at 0.000 µm

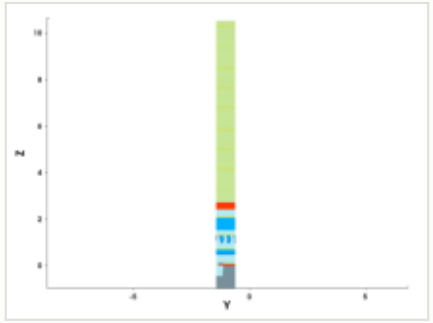

y cut at -1.035 µm

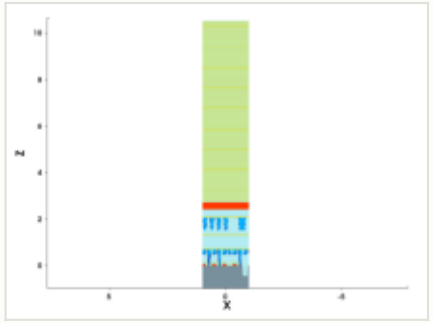


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

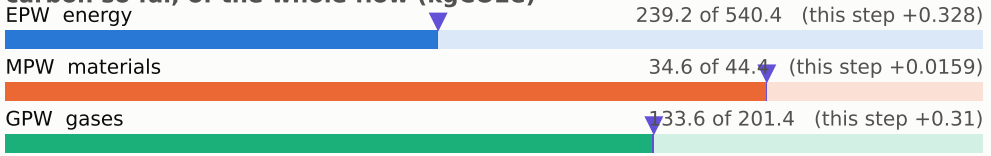


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

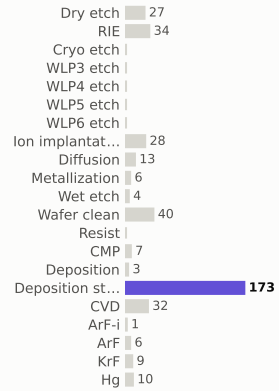

materials deposited (g)

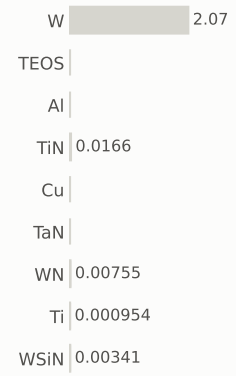

gases emitted (g)




Step #5780: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	408.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

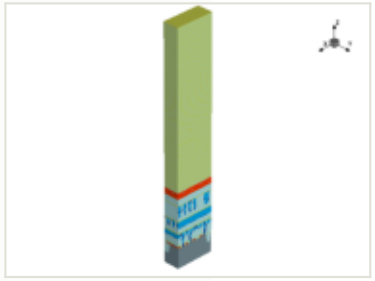


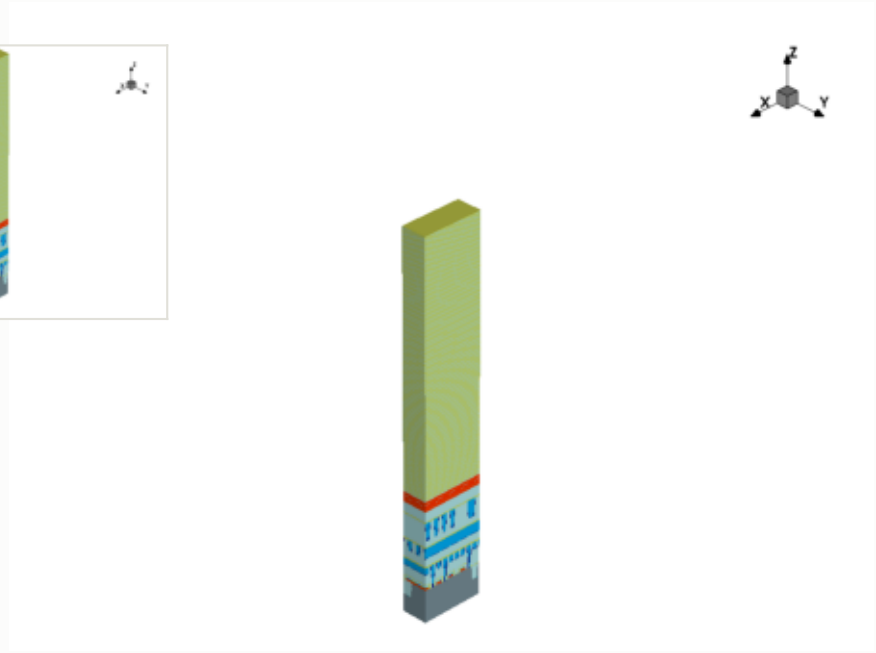


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

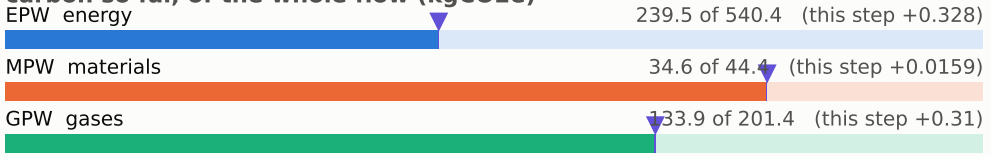


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

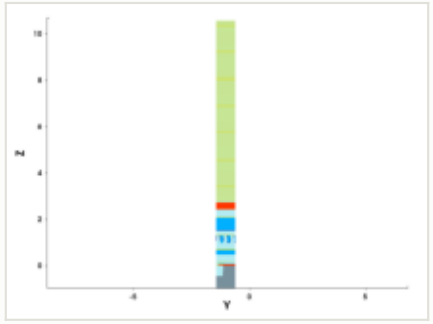


y cut at -1.035 µm

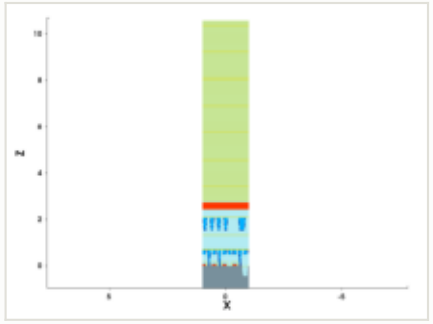


mask for this step

no mask for this step


steps by process area



materials deposited (g)

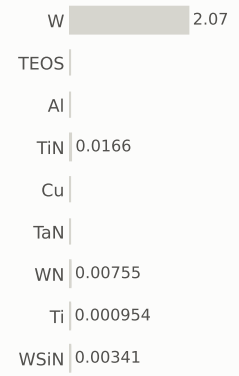

gases emitted (g)




Step #5790: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	408.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

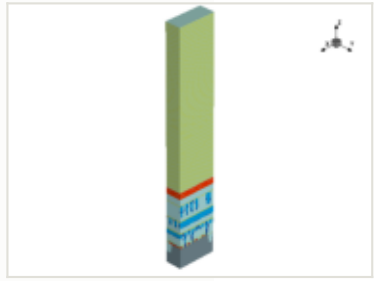


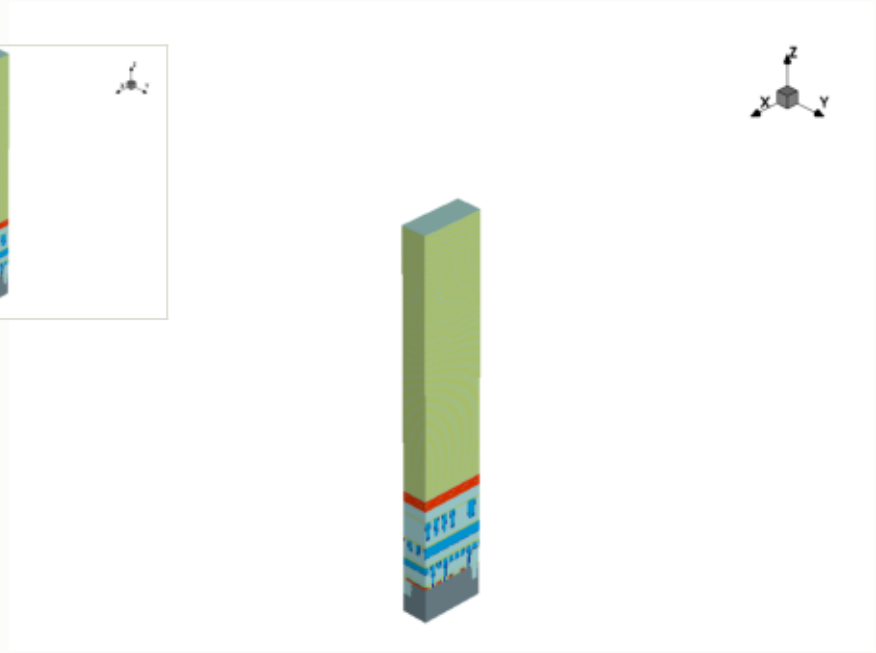

x cut at 0.000 µm

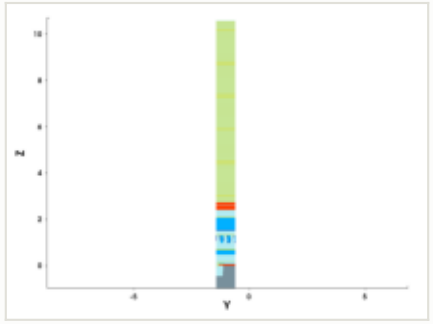

y cut at -1.035 µm

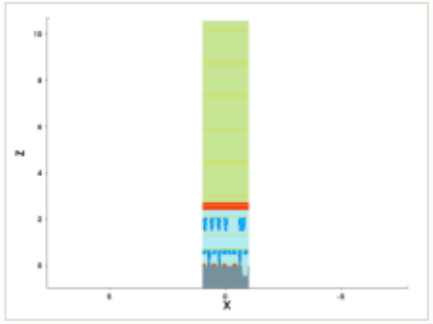


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

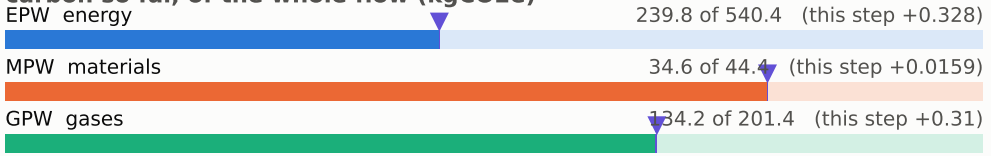


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

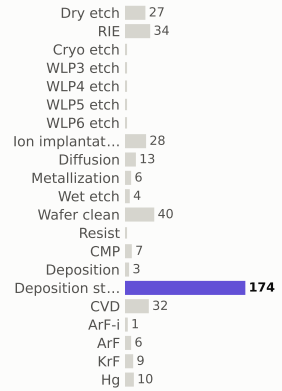

materials deposited (g)

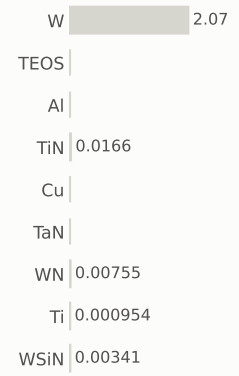

gases emitted (g)

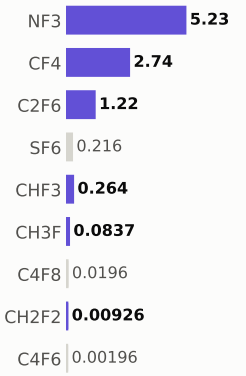


Step #5800: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	409.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

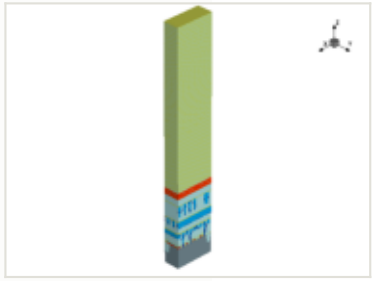


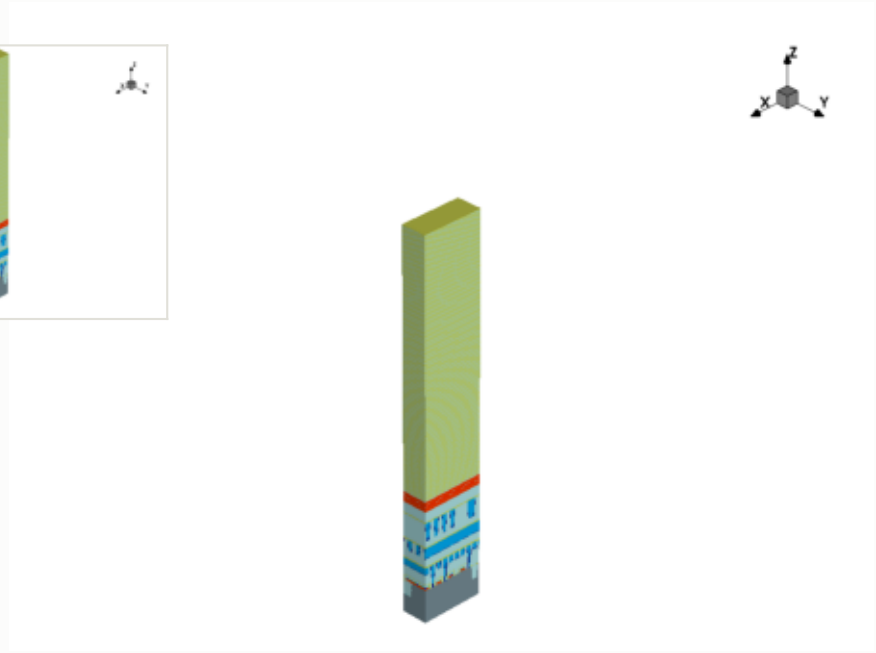

x cut at 0.000 µm

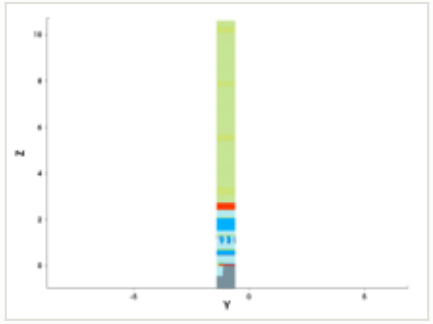

y cut at -1.035 µm

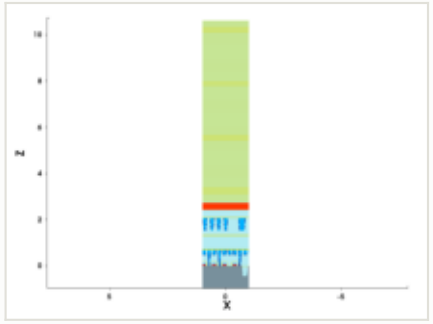


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

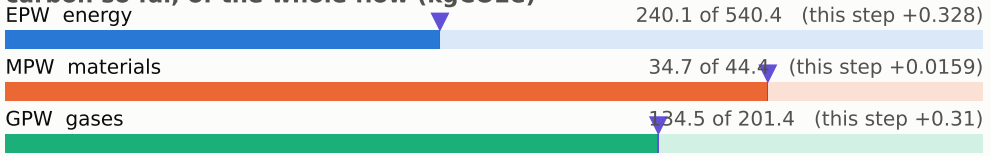


embodied carbon up to each step (kgCO2e per wafer)




steps by process area



materials deposited (g)

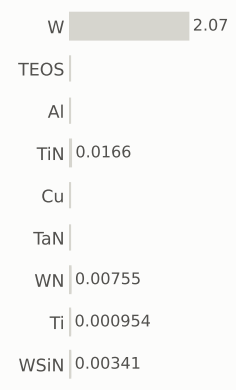

gases emitted (g)




Step #5810: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	409.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

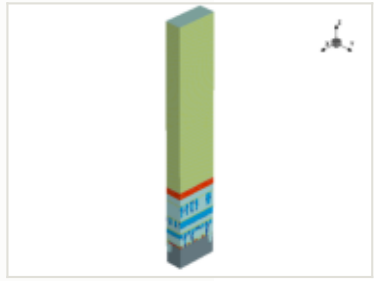


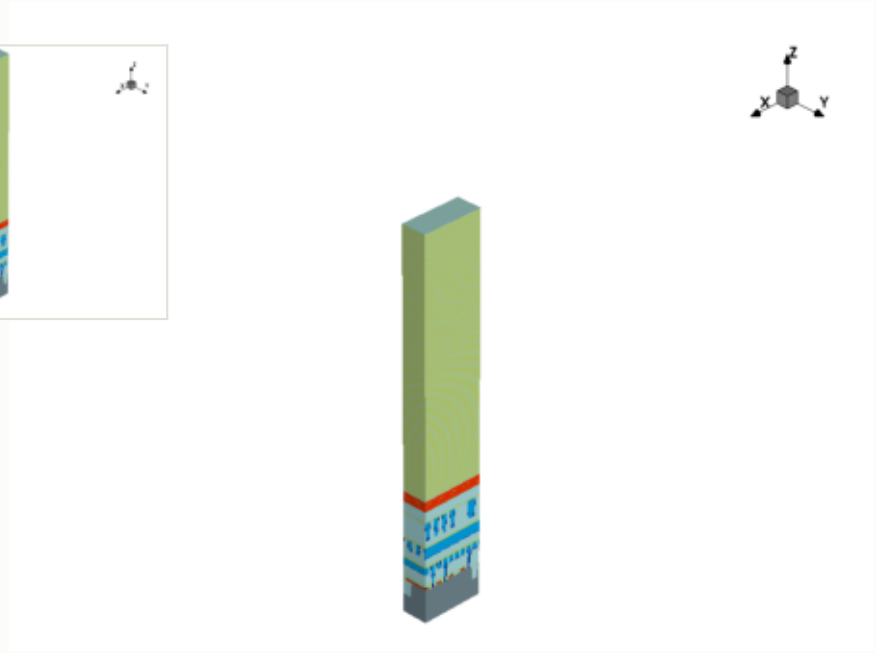

x cut at 0.000 µm

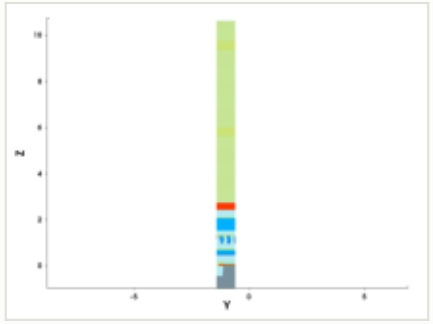

y cut at -1.035 µm

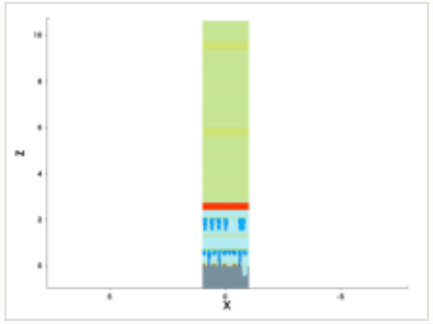


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

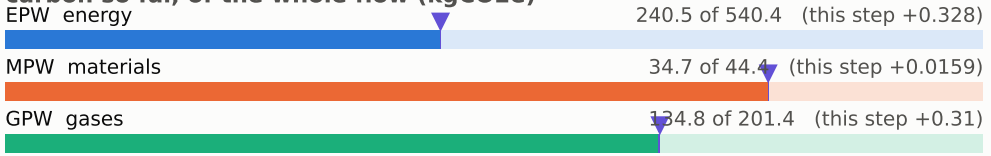

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

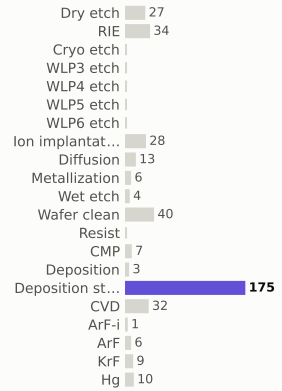

materials deposited (g)



gases emitted (g)

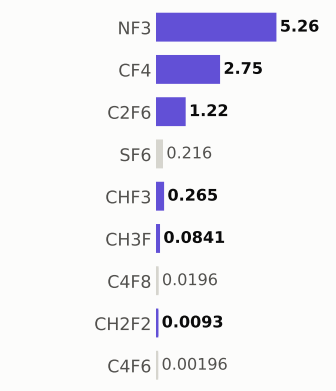


Step #5820: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	410.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

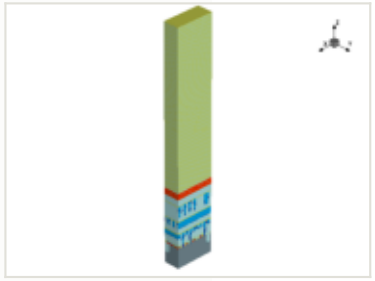


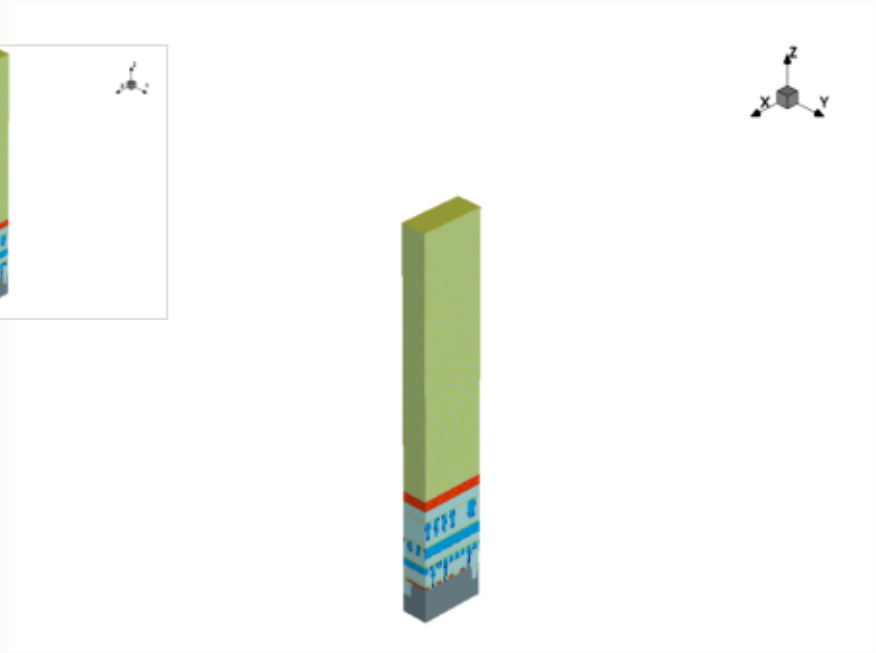


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

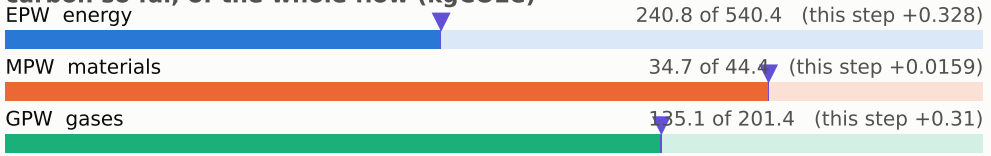


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

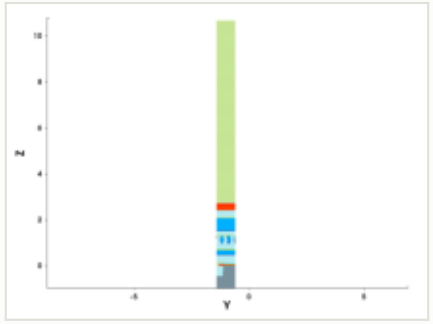


y cut at -1.035 µm

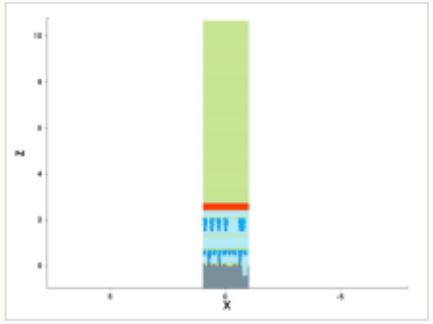


mask for this step

no mask for this step


steps by process area



materials deposited (g)

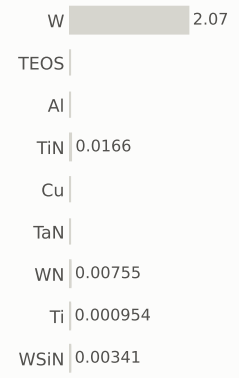

gases emitted (g)




Step #5830: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	411.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

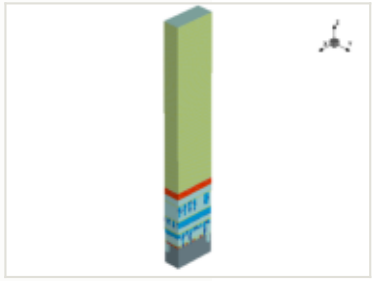


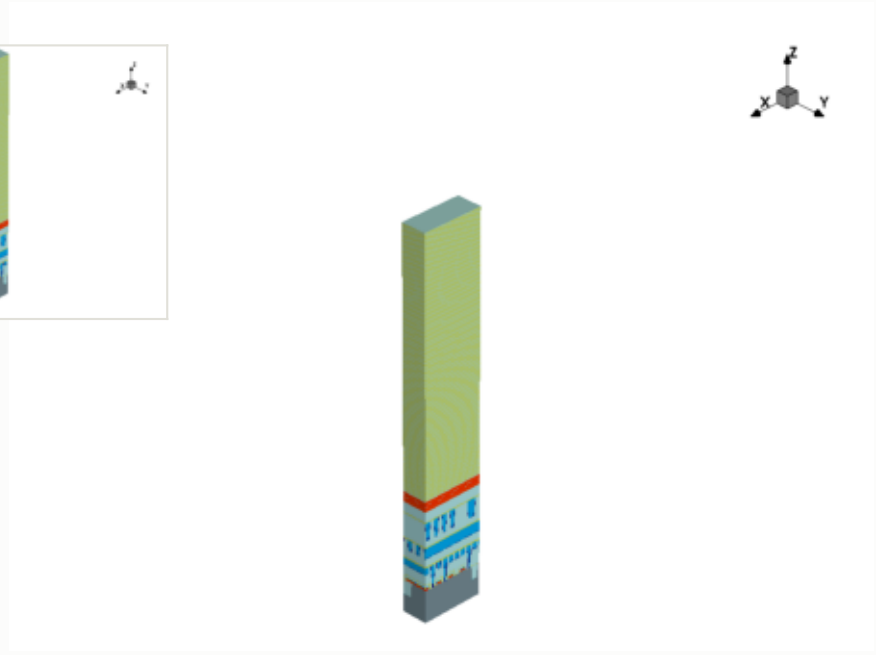

x cut at 0.000 µm

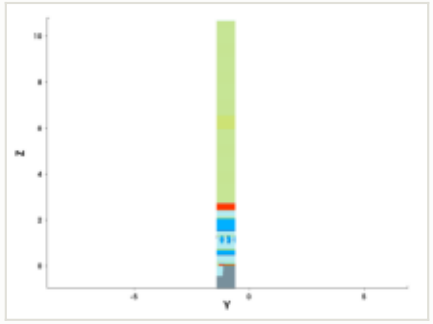

y cut at -1.035 µm

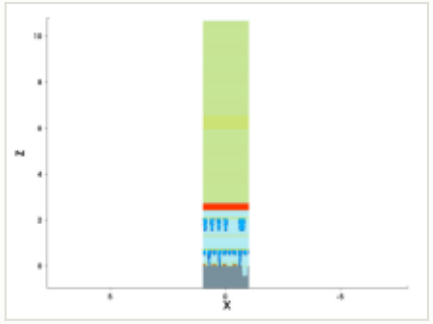


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

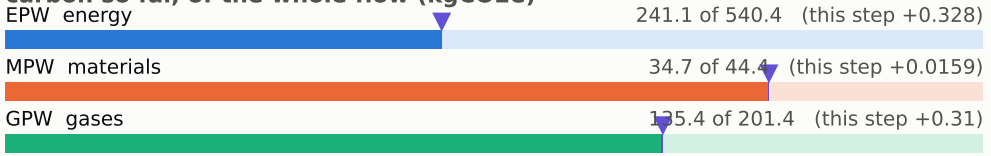

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

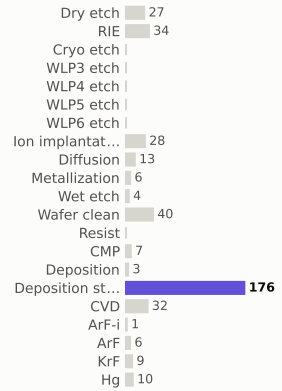

materials deposited (g)



gases emitted (g)

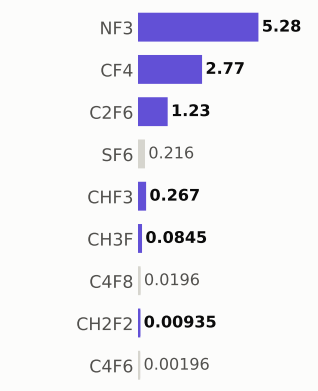


Step #5840: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	411.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

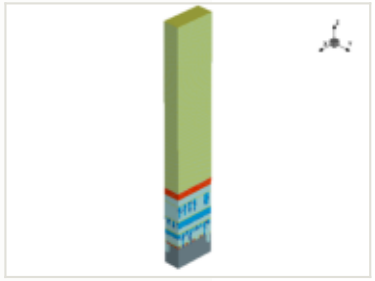


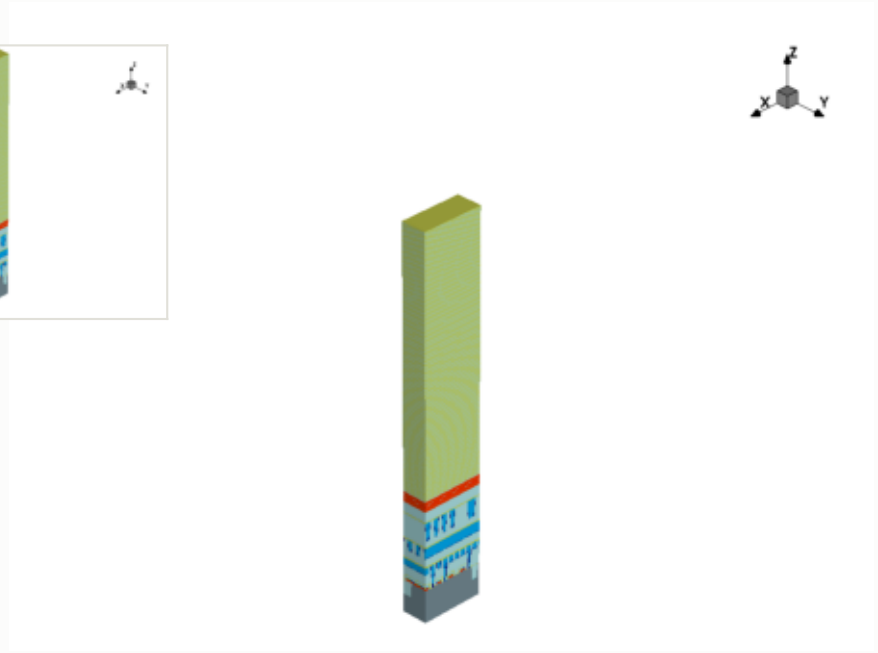

x cut at 0.000 µm

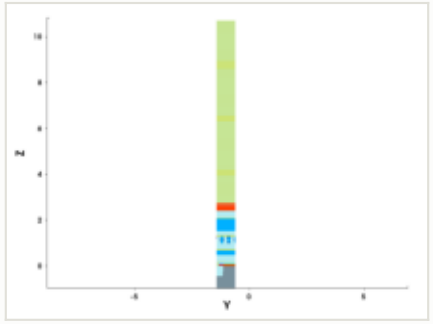

y cut at -1.035 µm

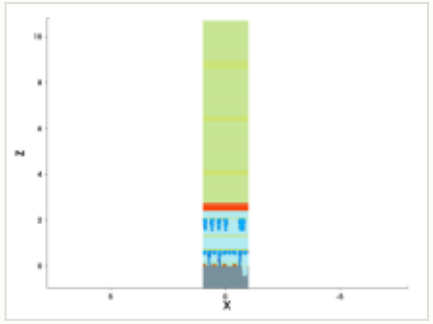


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

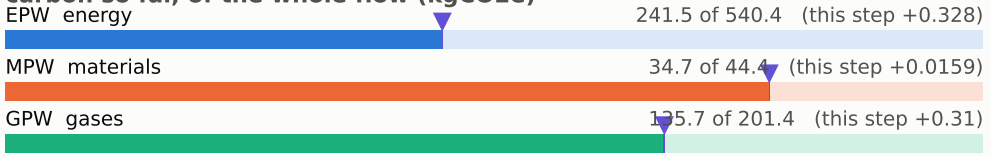

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

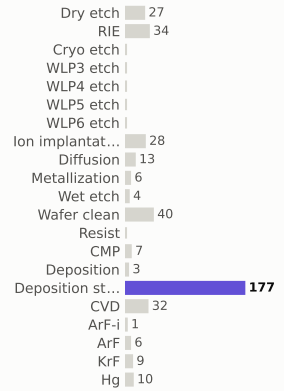

materials deposited (g)



gases emitted (g)




Step #5850: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	412.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

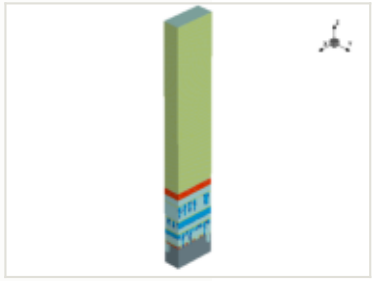


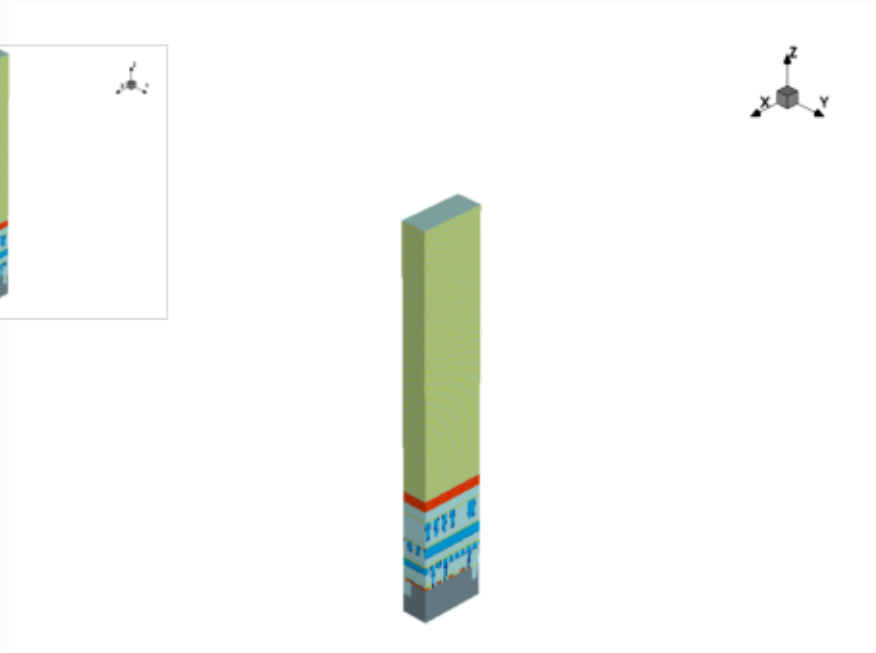

x cut at 0.000 µm

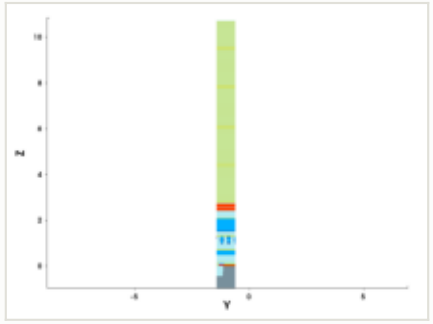

y cut at -1.035 µm

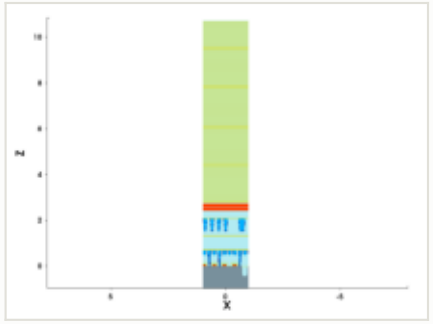


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

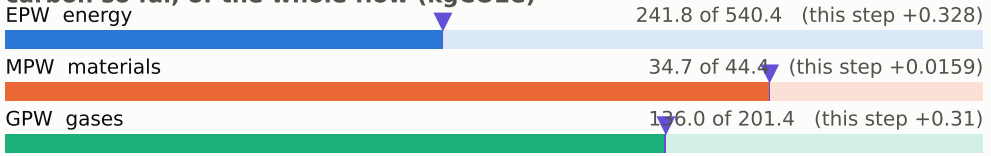

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

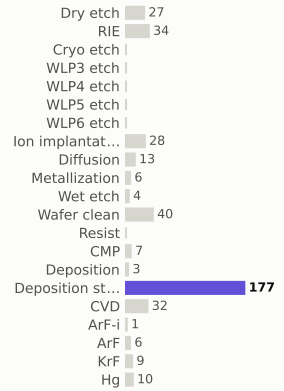

materials deposited (g)



gases emitted (g)

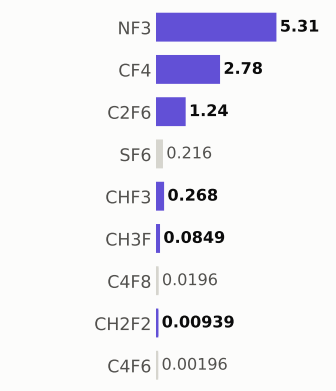


Step #5860: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	413.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

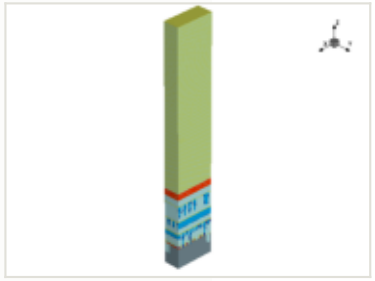


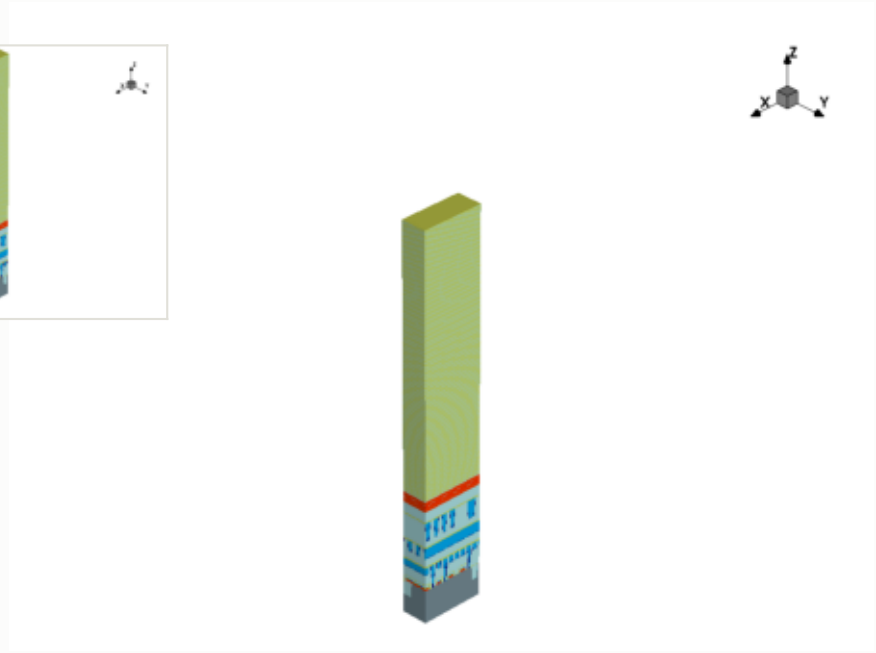

x cut at 0.000 µm

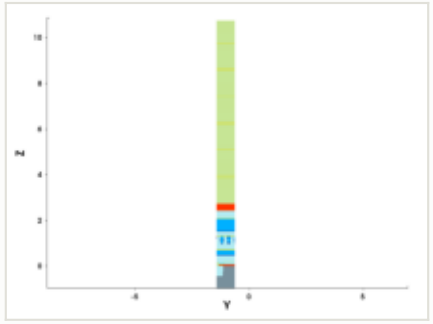

y cut at -1.035 µm

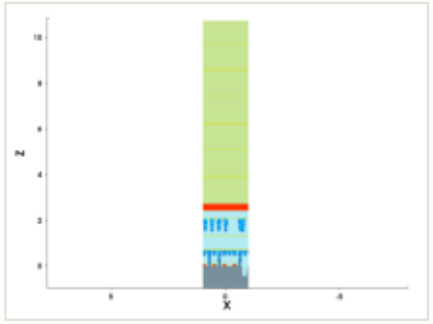


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

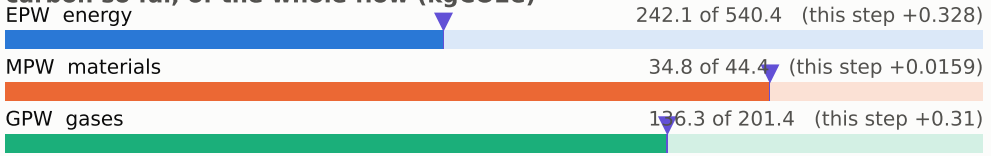

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

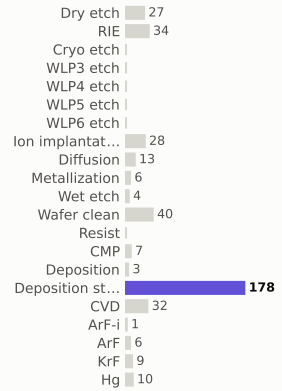

materials deposited (g)



gases emitted (g)

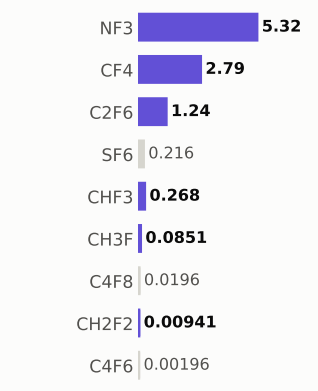


Step #5870: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	413.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

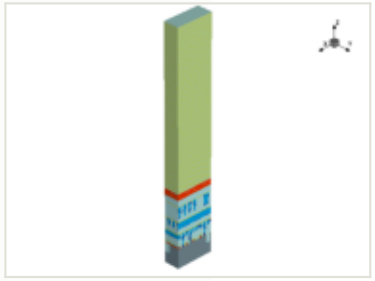


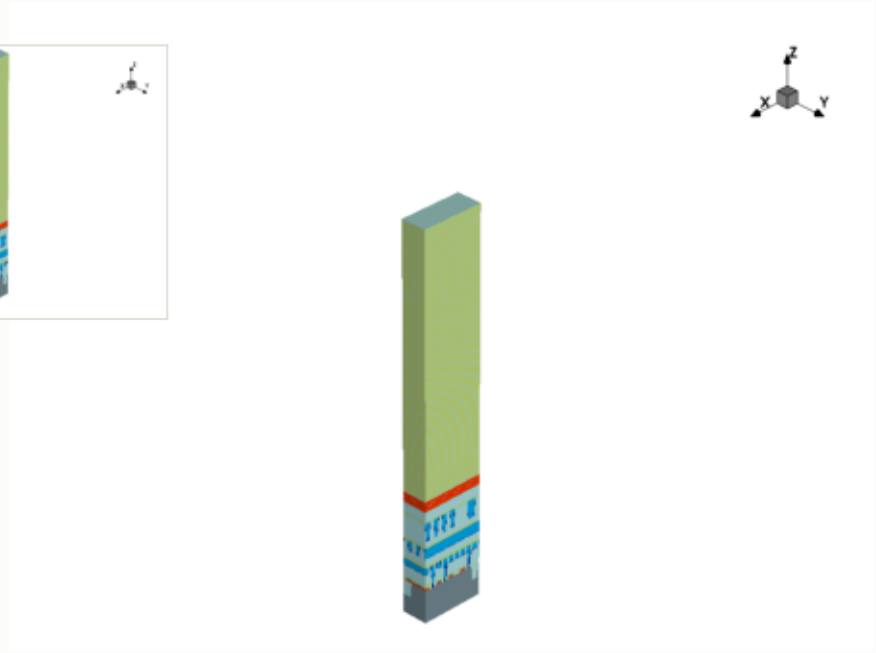

x cut at 0.000 µm

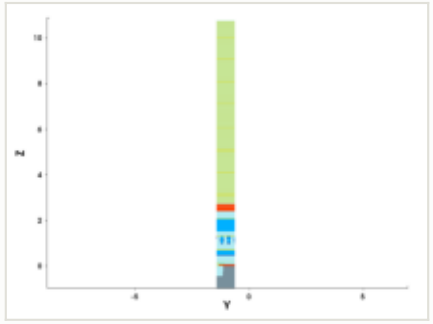

y cut at -1.035 µm

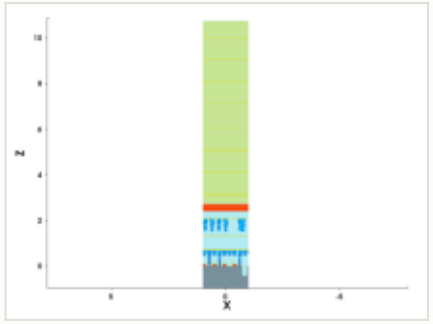


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

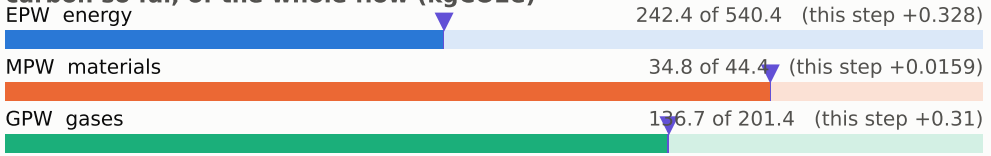


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

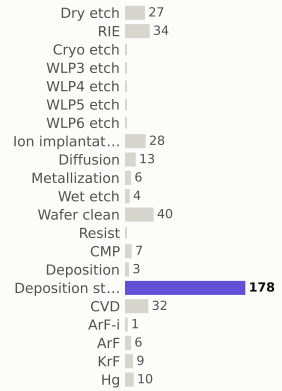

materials deposited (g)

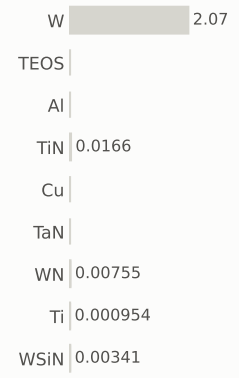

gases emitted (g)

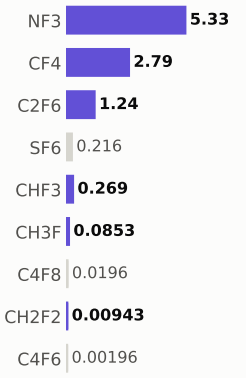


Step #5880: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	414.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

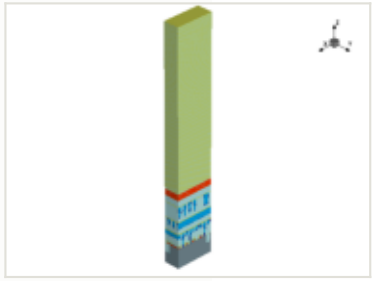


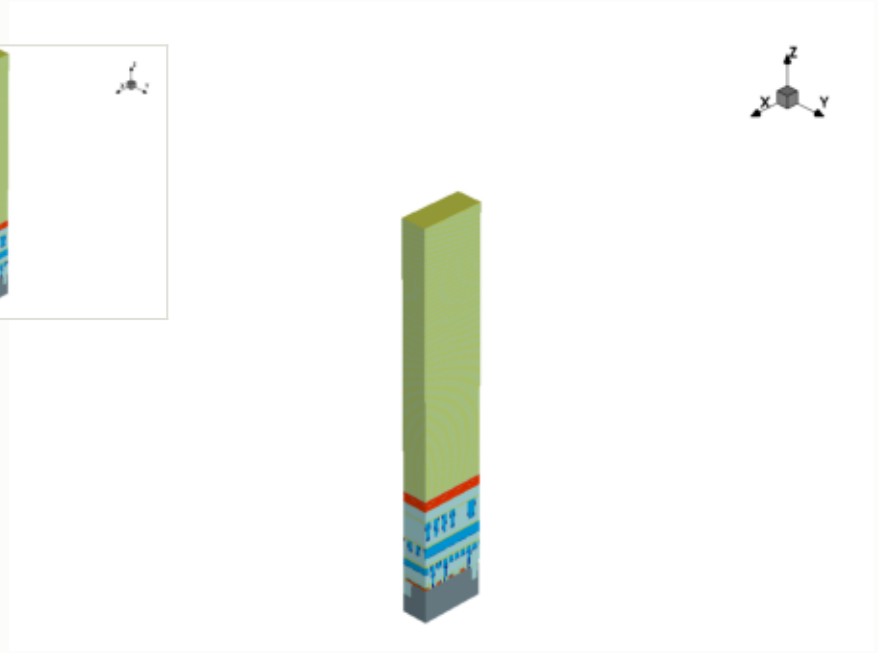

x cut at 0.000 µm

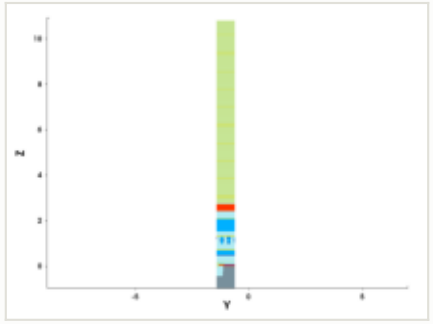

y cut at -1.035 µm

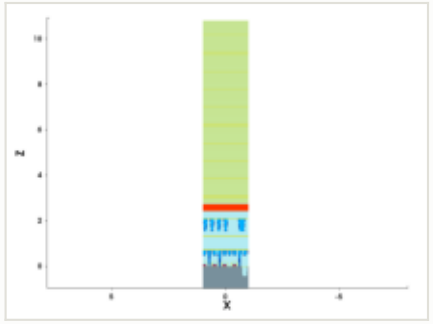


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

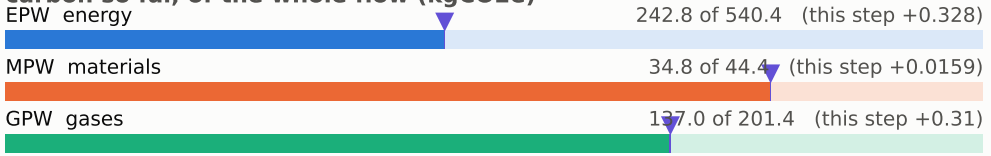

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

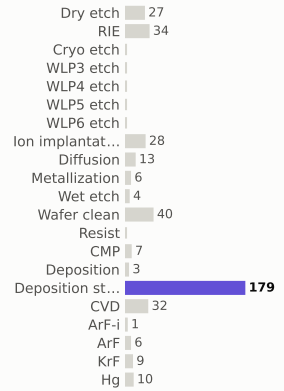

materials deposited (g)



gases emitted (g)

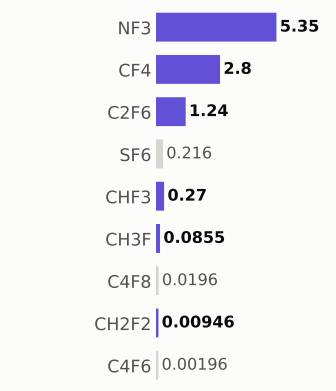


Step #5890: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	415.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

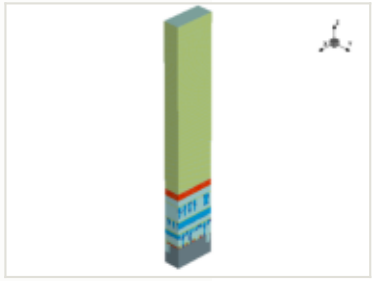


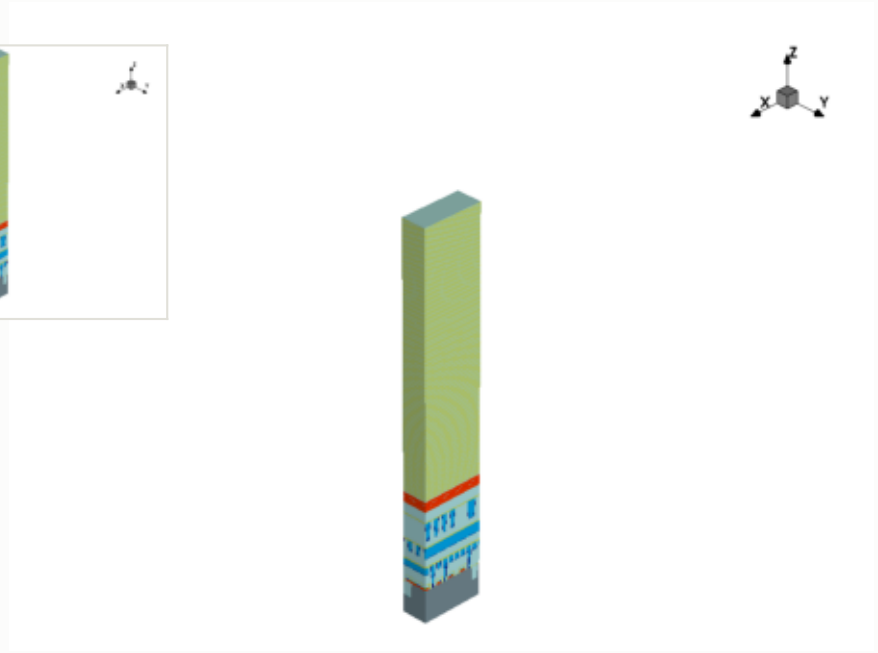

x cut at 0.000 µm

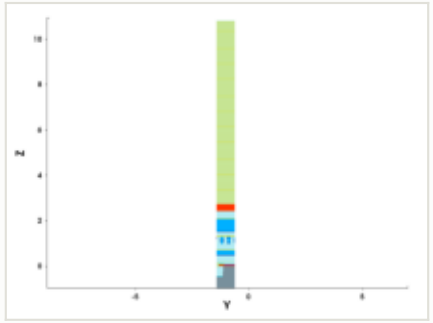

y cut at -1.035 µm

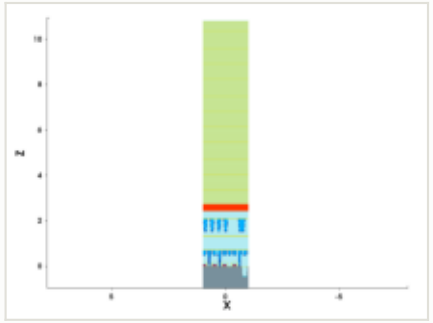


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

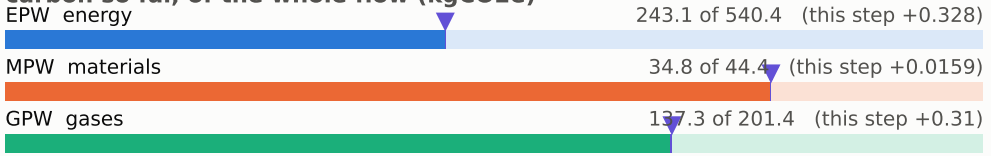

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

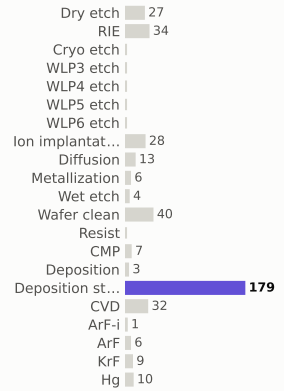

materials deposited (g)



gases emitted (g)

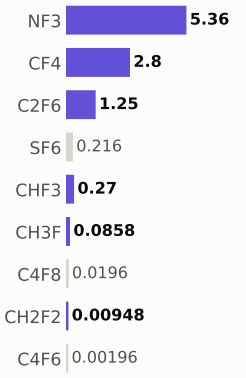


Step #5900: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	415.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

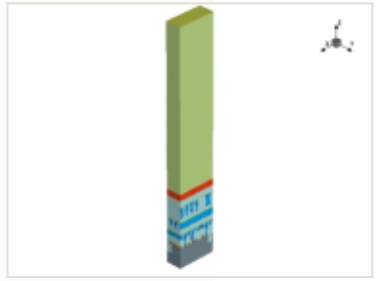


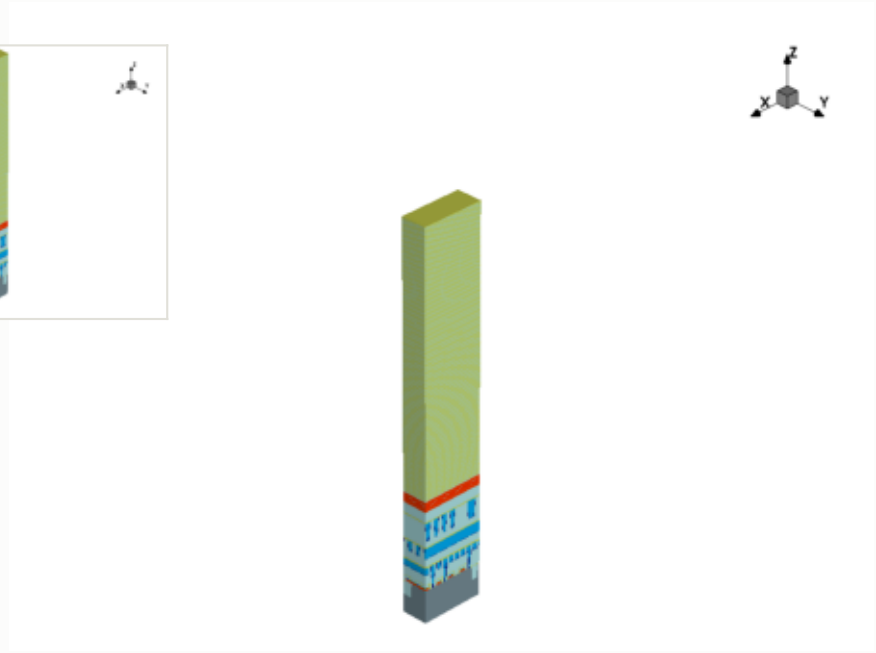


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

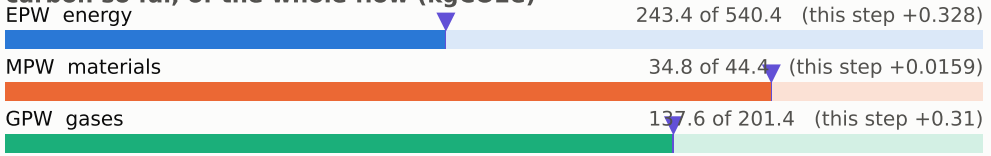


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

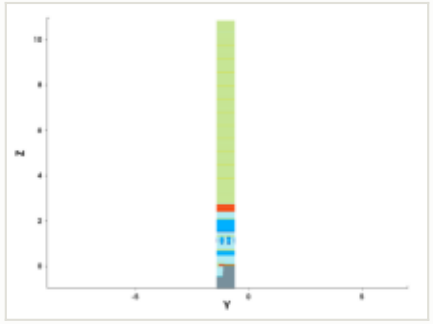


y cut at -1.035 µm

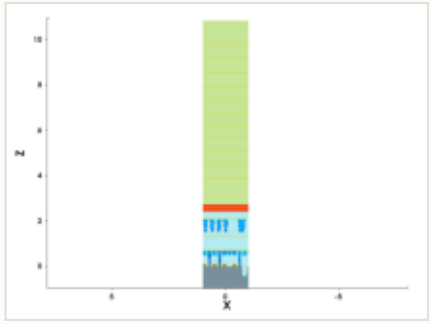


mask for this step

no mask for this step


steps by process area

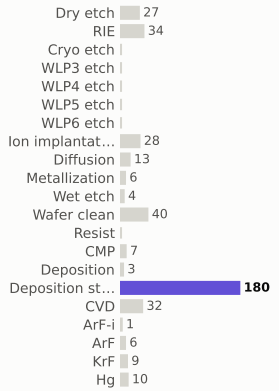

materials deposited (g)

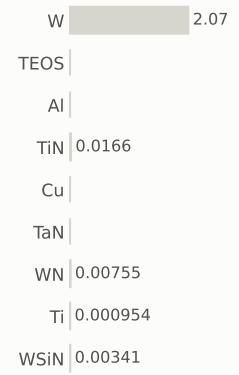

gases emitted (g)




Step #5910: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	416.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

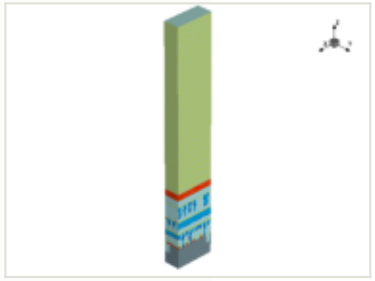


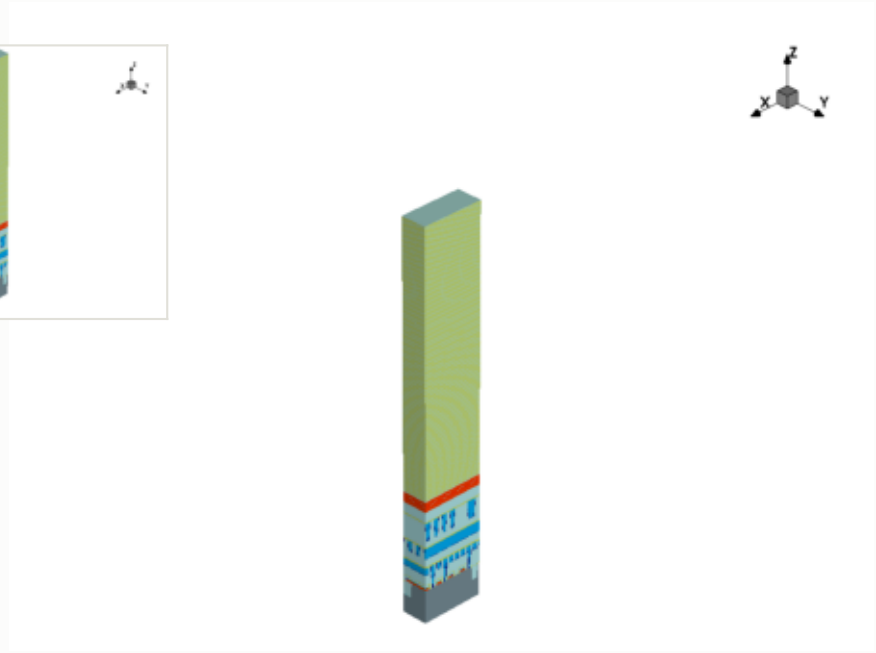

x cut at 0.000 µm

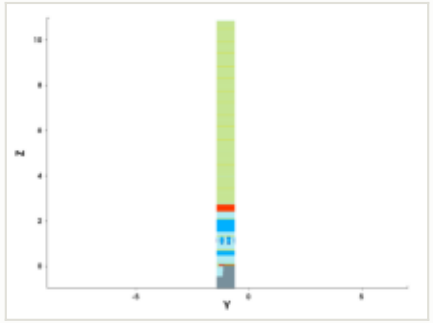

y cut at -1.035 µm

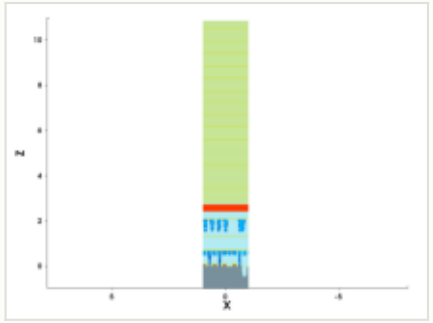

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 243.7 of 540.4 (this step +0.328)


MPW materials — 34.8 of 44.4 (this step +0.0159)

GPW gases — 137.9 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

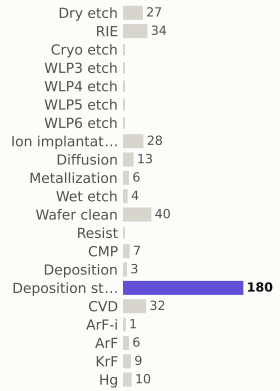

materials deposited (g)

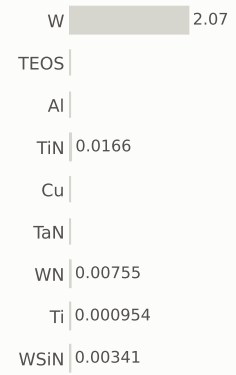

gases emitted (g)




Step #5920: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	417.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

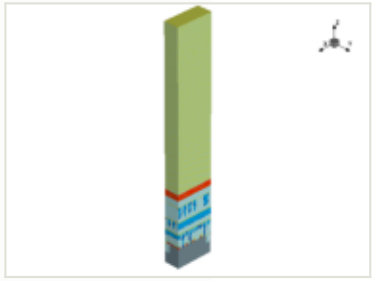


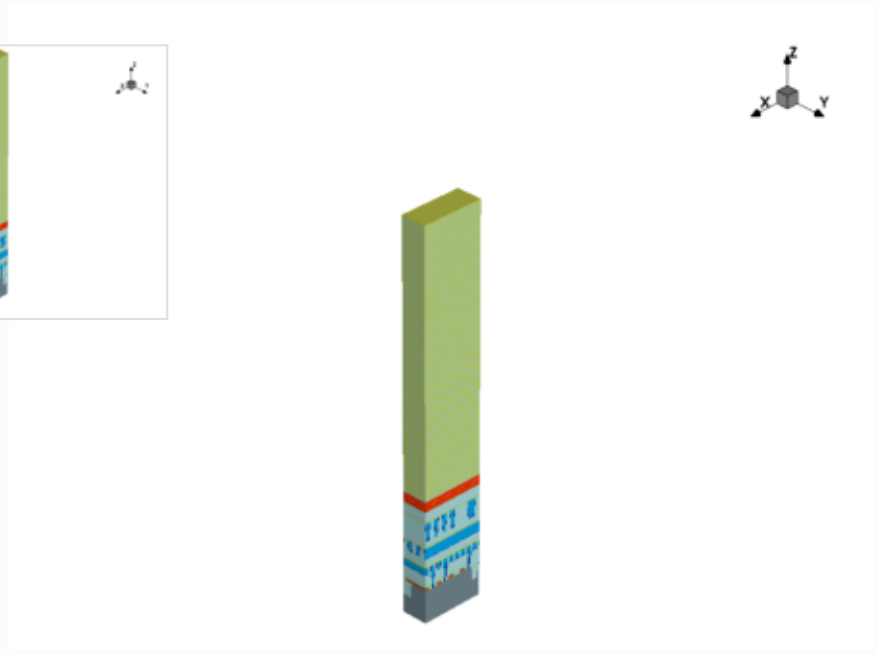

x cut at 0.000 µm

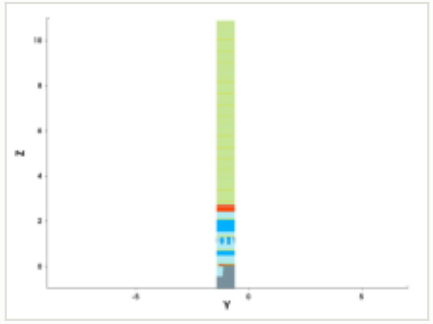

y cut at -1.035 µm

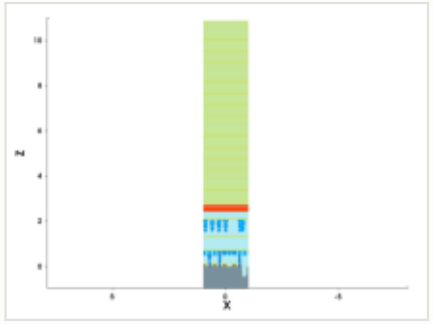


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

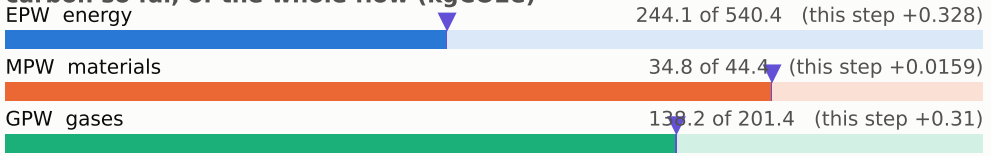

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

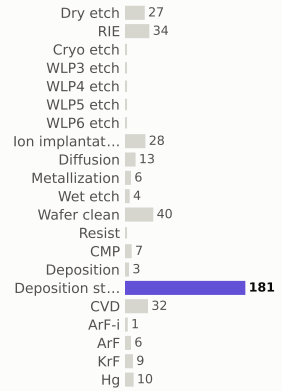

materials deposited (g)



gases emitted (g)



Step #5930: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	417.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




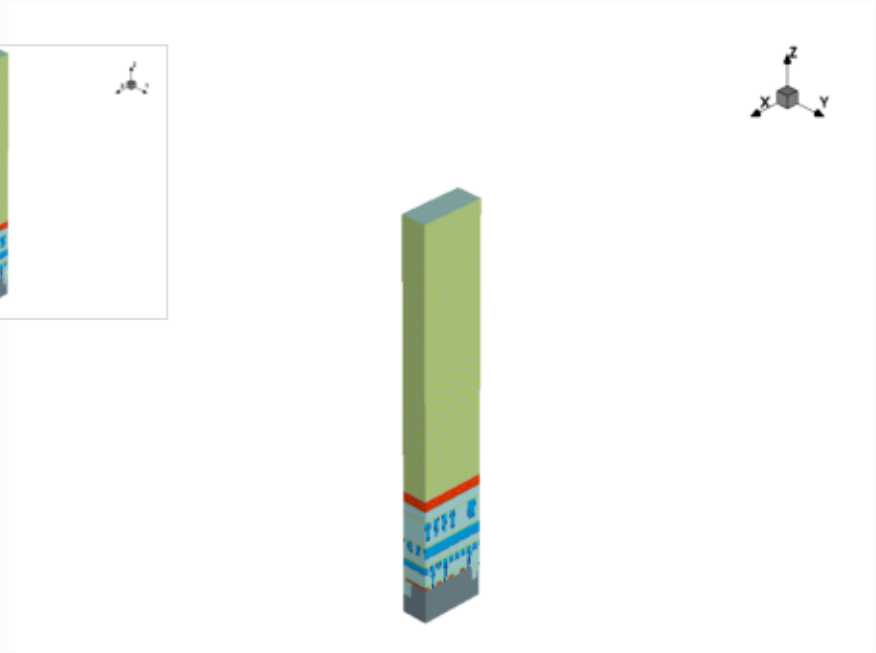

x cut at 0.000 µm

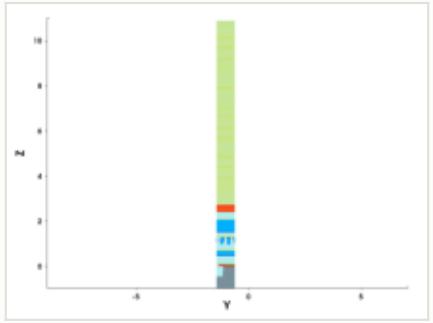

y cut at -1.035 µm

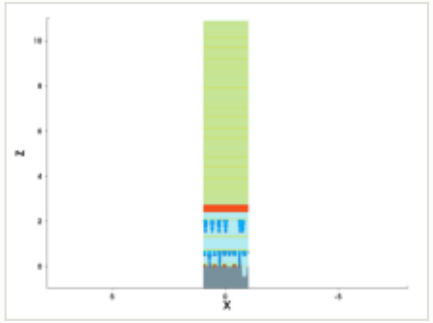


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

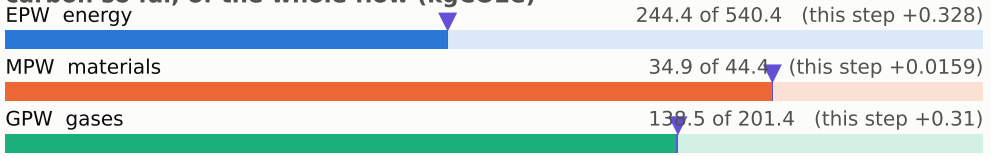

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

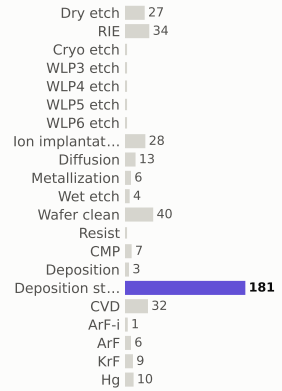

materials deposited (g)



gases emitted (g)



Step #5940: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	418.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




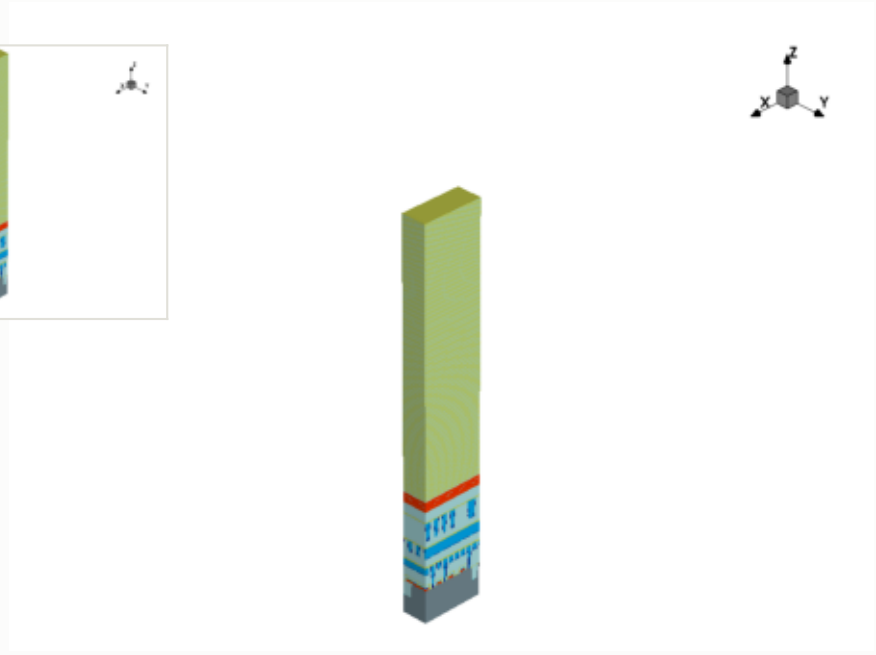


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

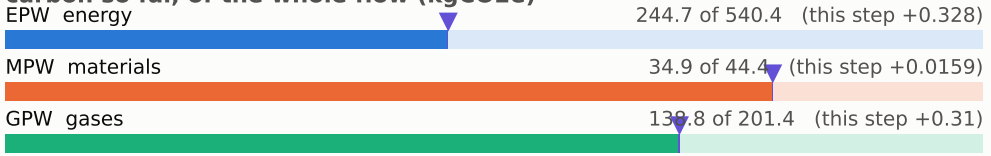


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

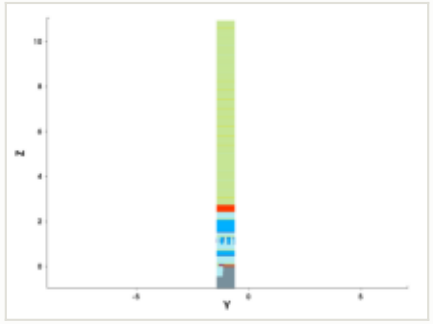


y cut at -1.035 µm

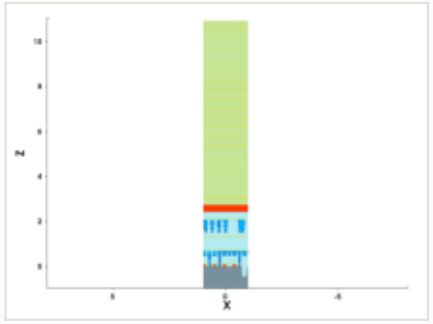


mask for this step

no mask for this step


steps by process area

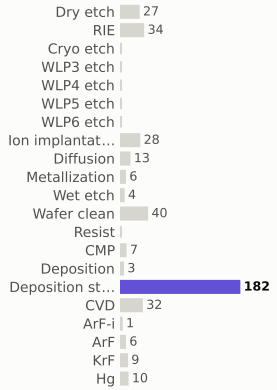

materials deposited (g)

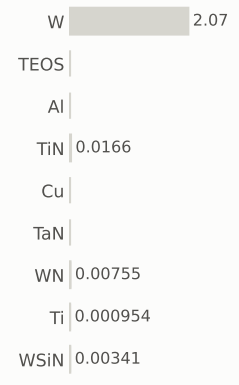

gases emitted (g)



Step #5950: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	419.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




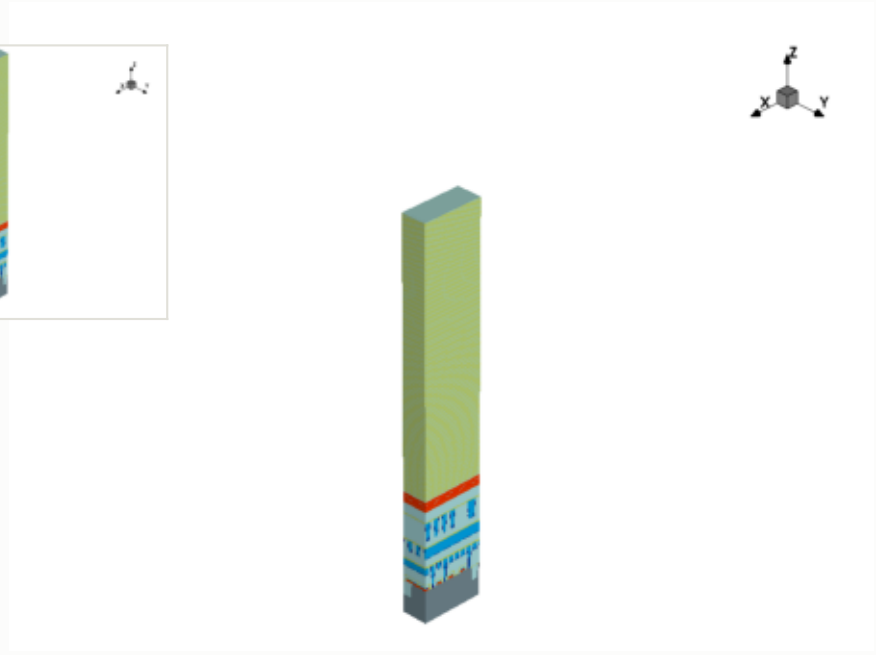


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

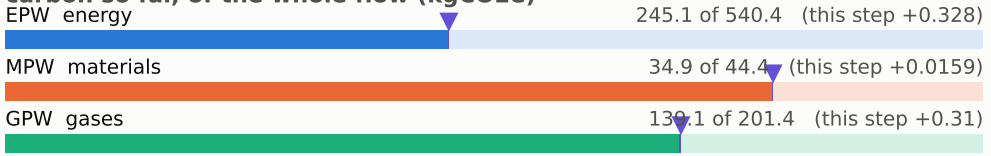


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

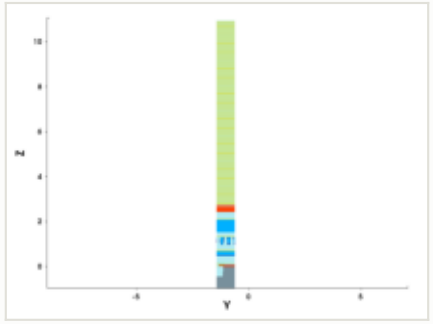


y cut at -1.035 µm

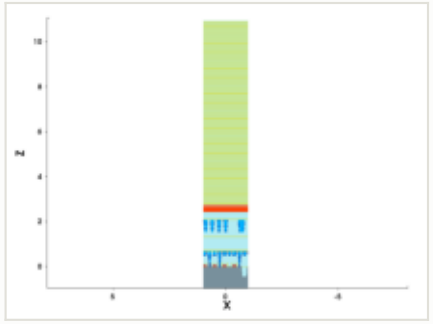

mask for this step

no mask for this step


steps by process area

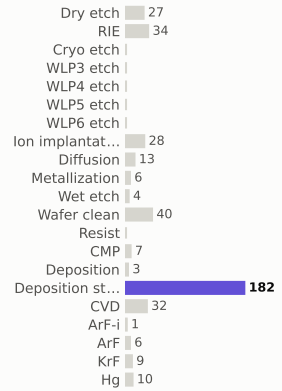

materials deposited (g)



gases emitted (g)

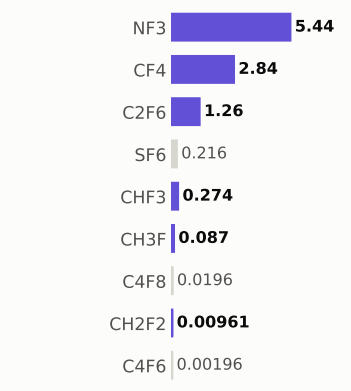

Step #5960: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	419.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




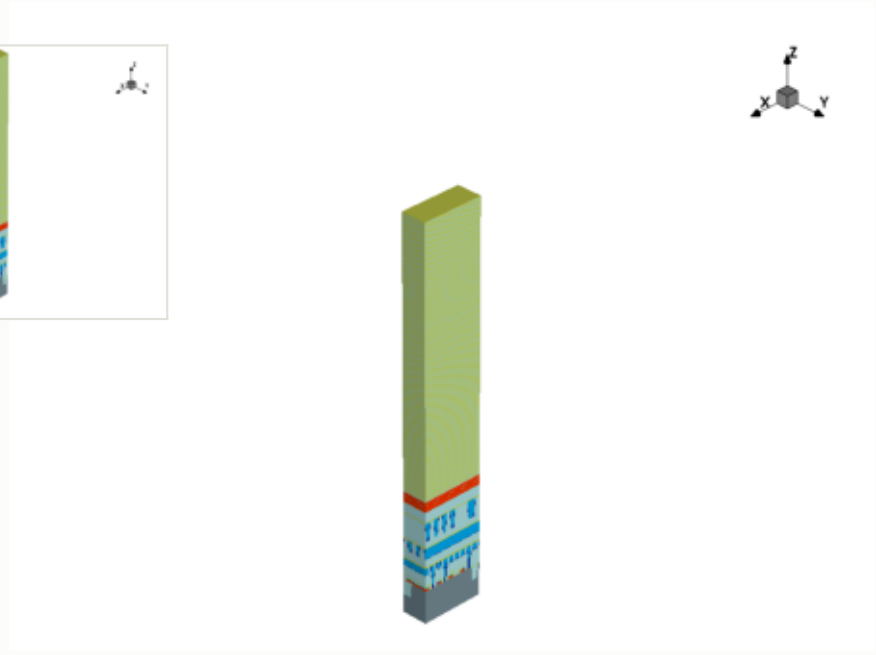

x cut at 0.000 µm

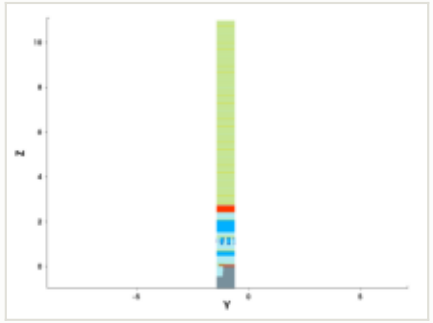

y cut at -1.035 µm

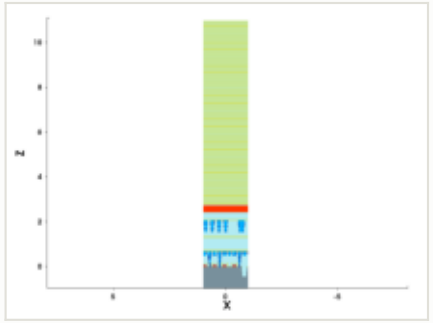


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

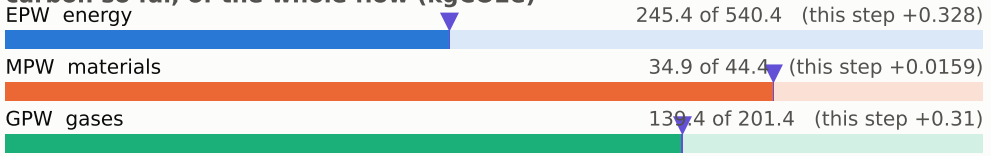

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

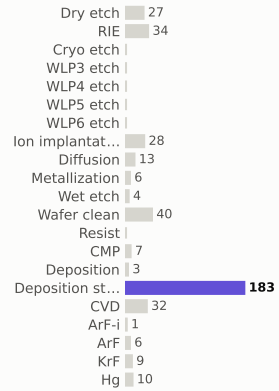

materials deposited (g)



gases emitted (g)

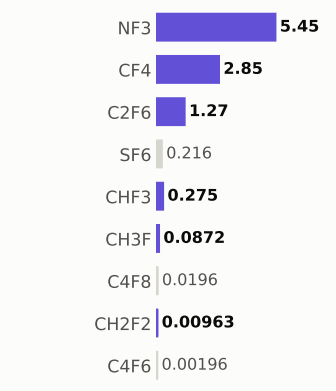

Step #5970: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	420.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




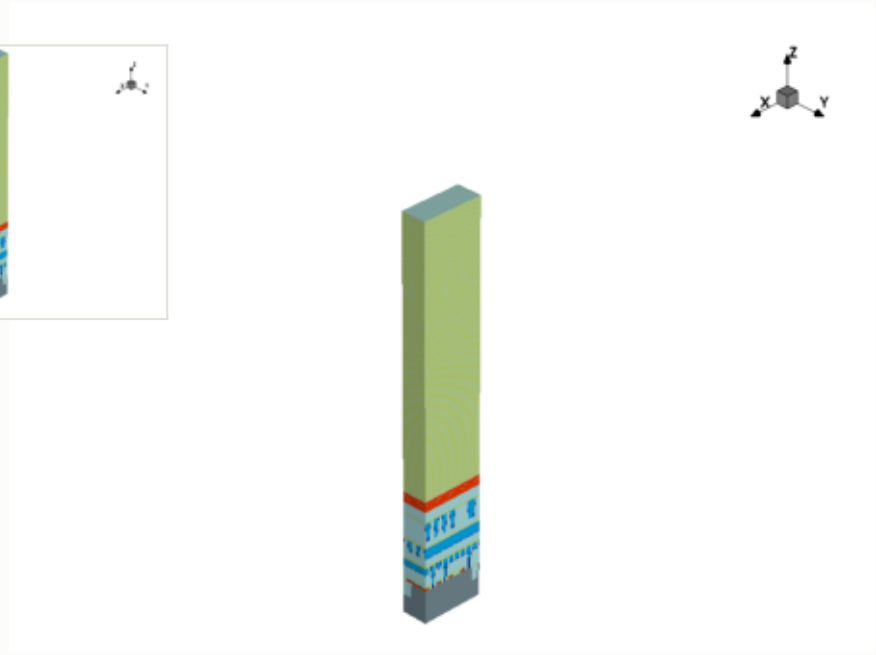


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

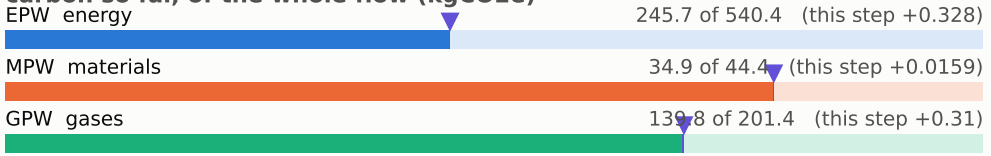


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

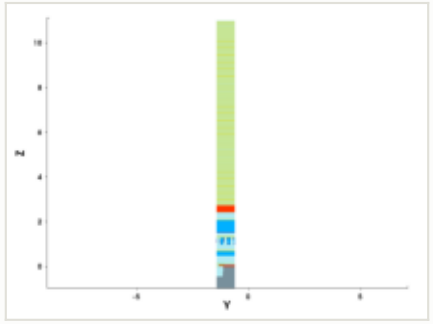


y cut at -1.035 µm

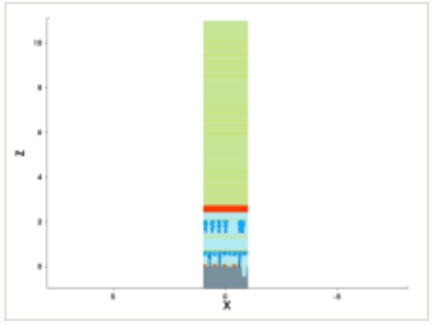

mask for this step

no mask for this step


steps by process area

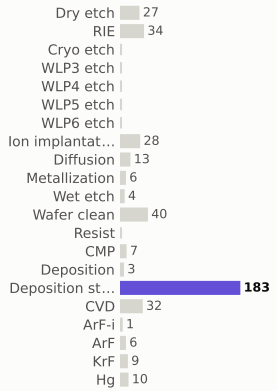

materials deposited (g)



gases emitted (g)



Step #5980: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	421.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




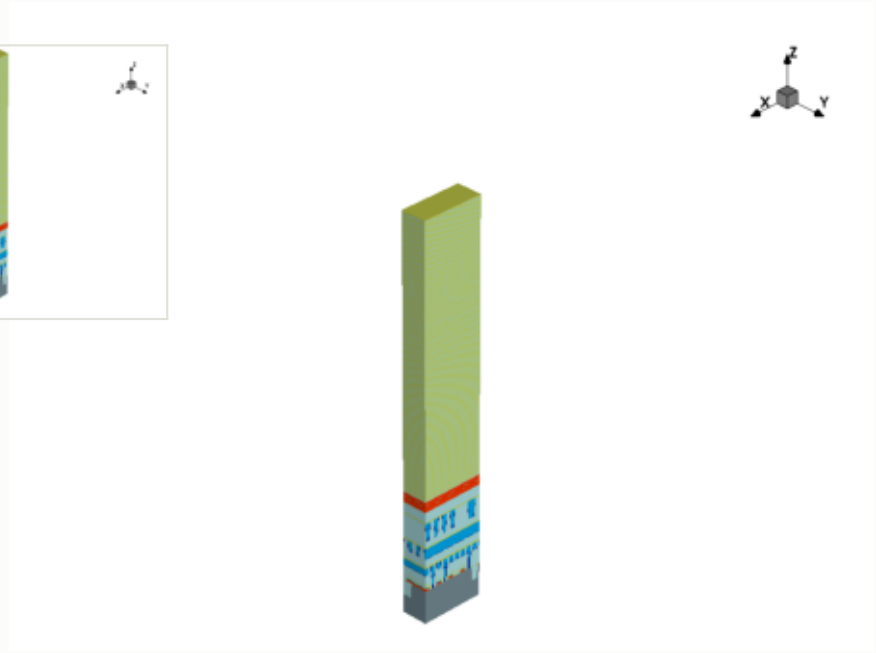


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

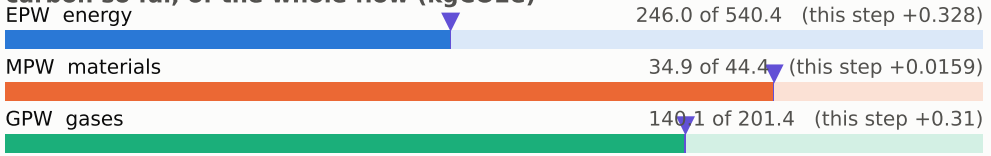


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

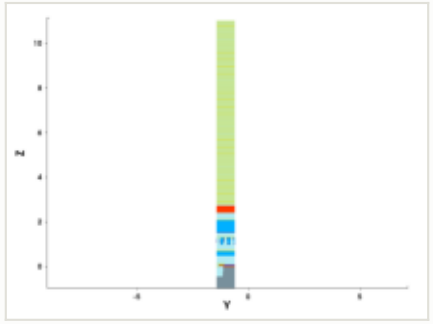


y cut at -1.035 µm

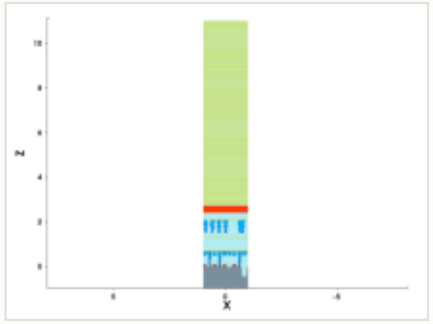

mask for this step

no mask for this step


steps by process area



materials deposited (g)



gases emitted (g)

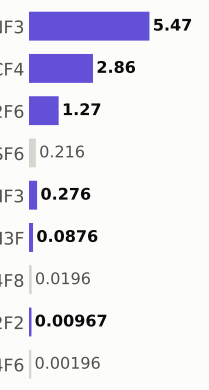

Step #5990: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	421.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




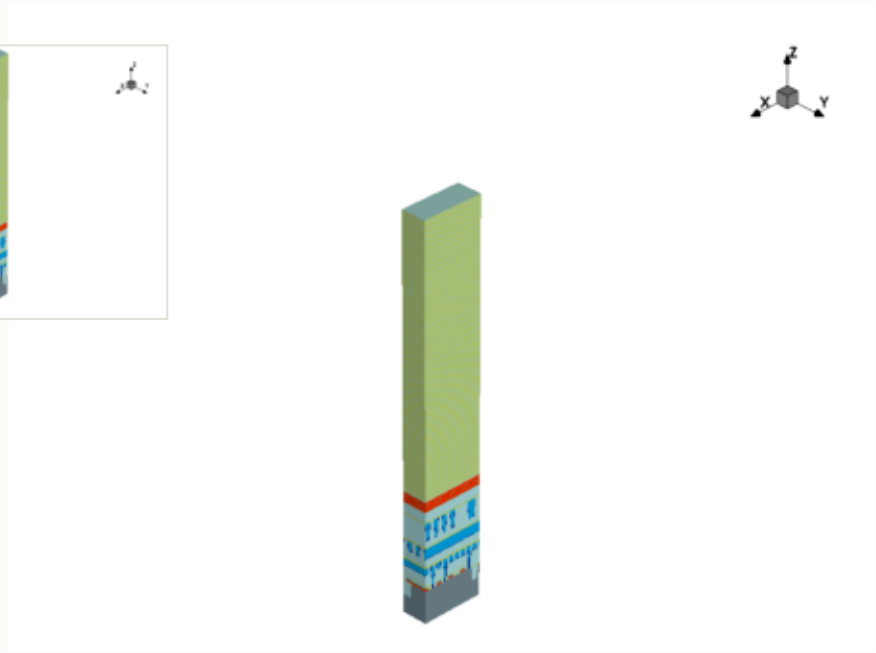

x cut at 0.000 µm

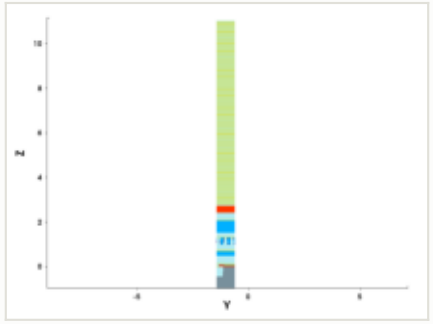

y cut at -1.035 µm

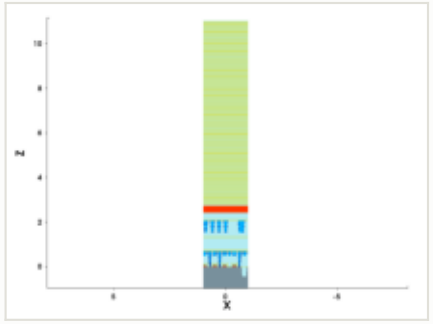


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

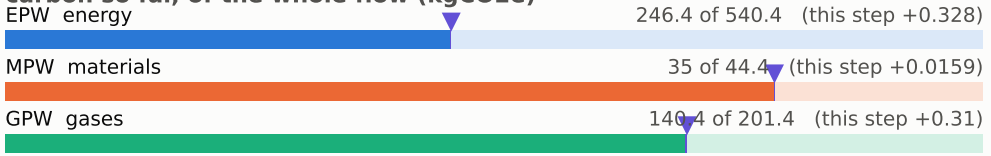

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

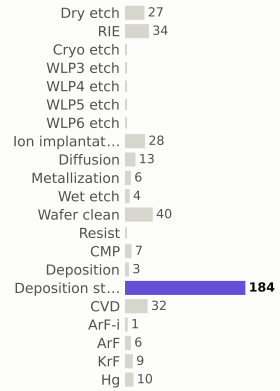

materials deposited (g)



gases emitted (g)

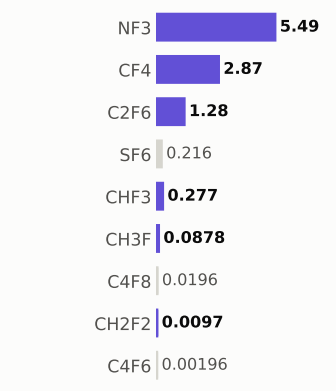

Step #6000: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	422.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




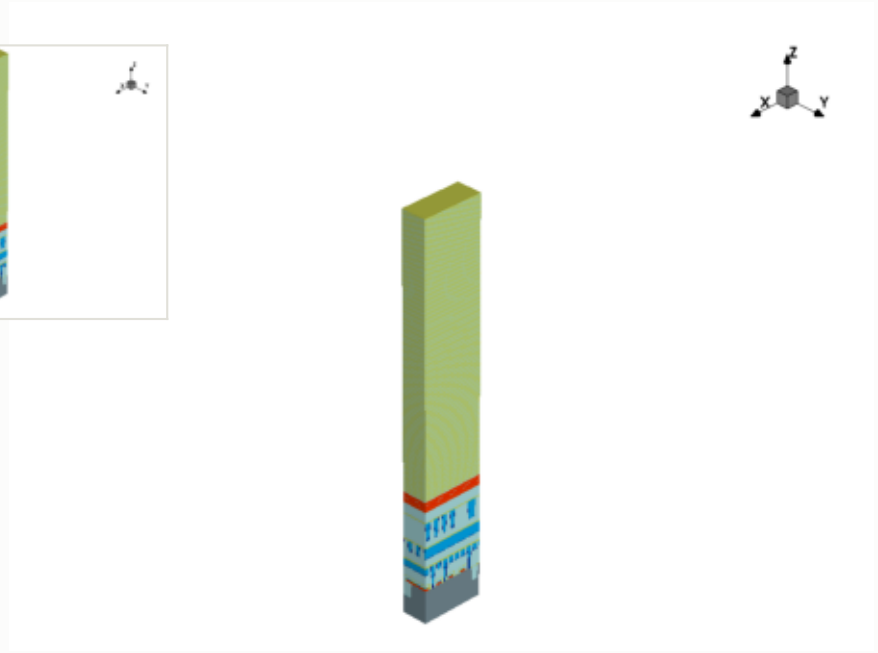


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

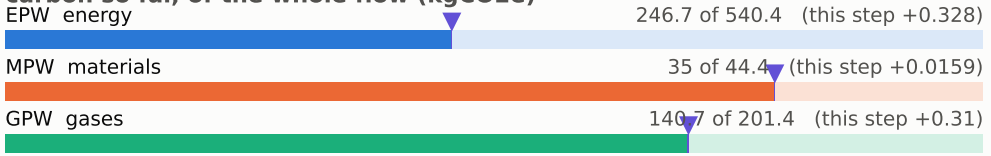


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

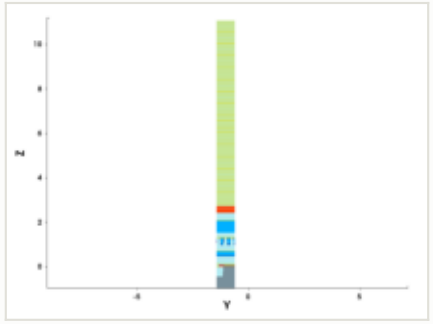


y cut at -1.035 µm

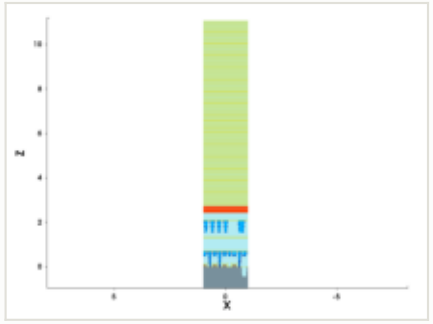

mask for this step

no mask for this step


steps by process area

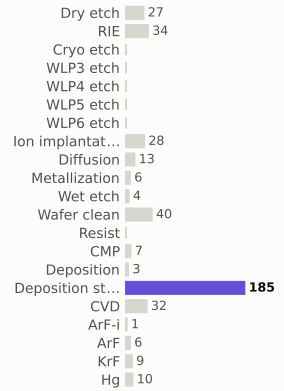

materials deposited (g)



gases emitted (g)



Step #6010: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	423.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




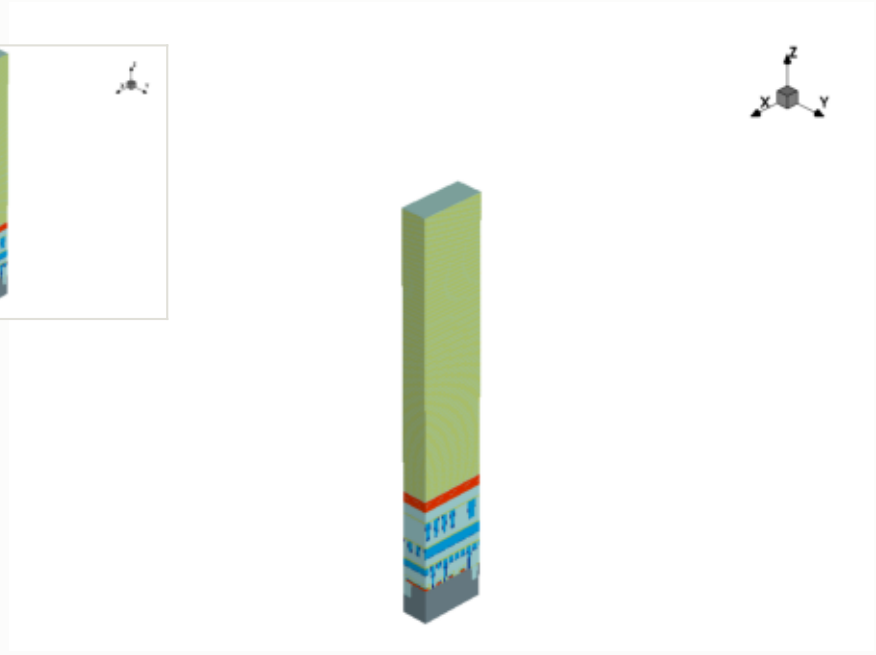

x cut at 0.000 µm

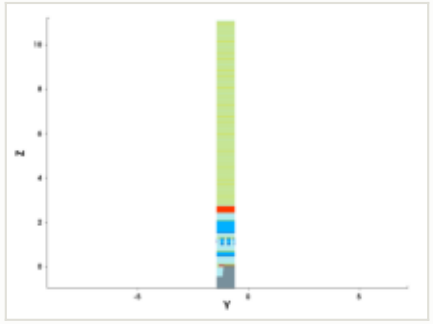

y cut at -1.035 µm

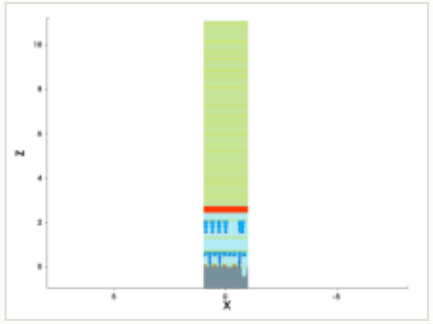


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

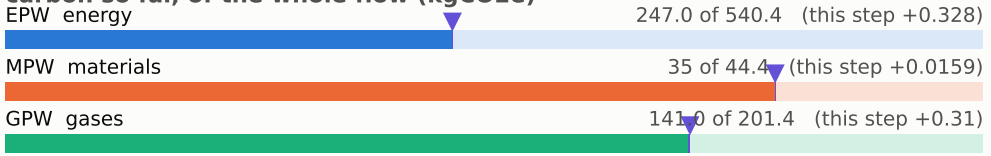

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

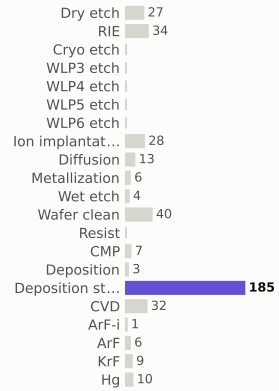

materials deposited (g)



gases emitted (g)

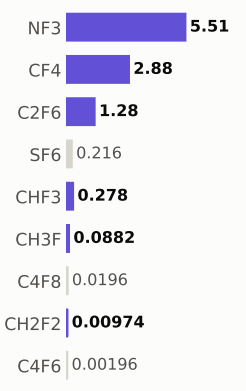

Step #6020: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	423.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




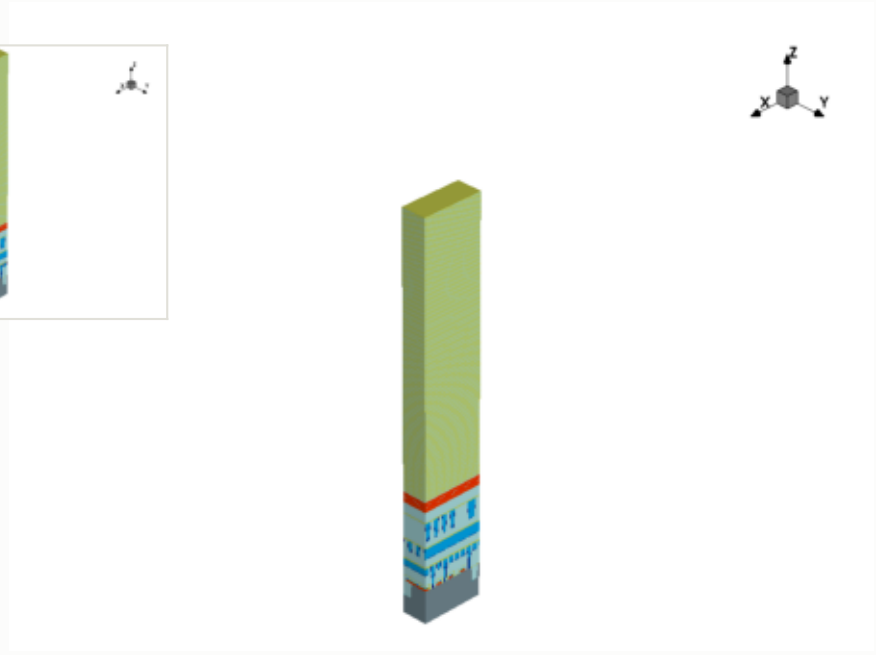

x cut at 0.000 µm

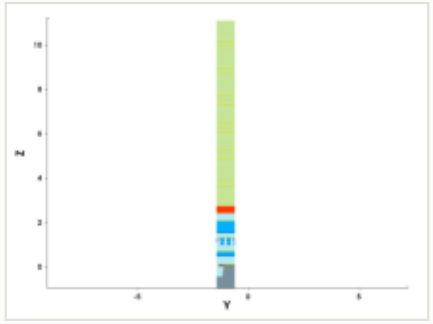

y cut at -1.035 µm

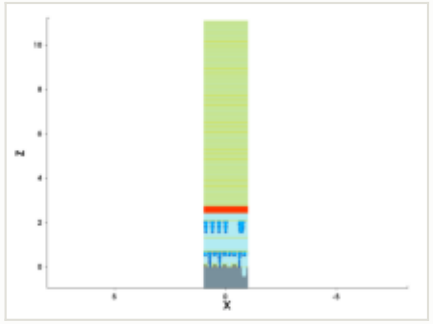


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

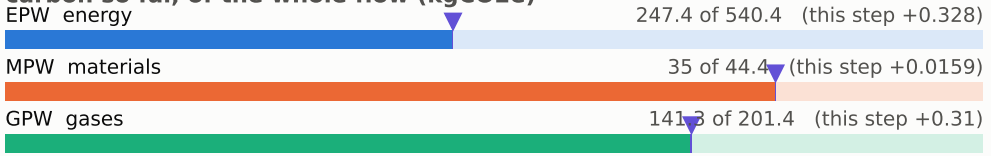

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

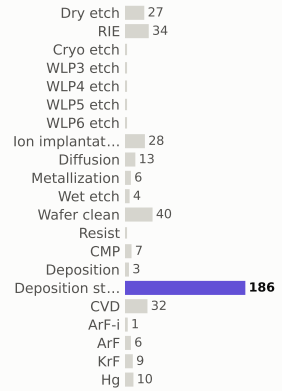

materials deposited (g)



gases emitted (g)

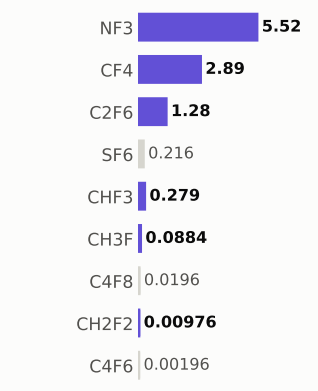

Step #6030: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	424.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




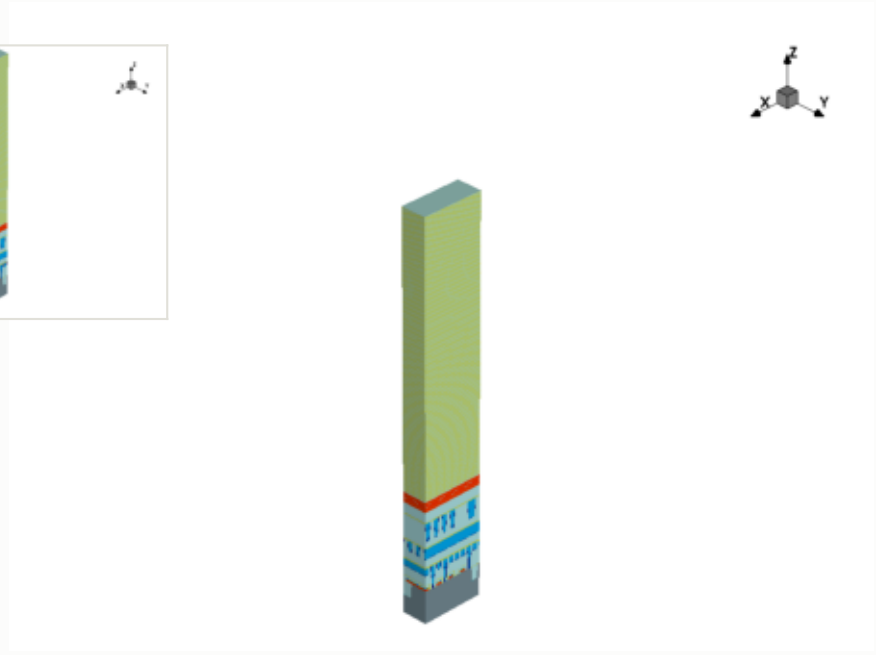

x cut at 0.000 µm

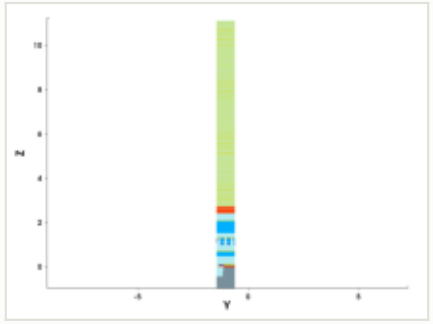

y cut at -1.035 µm

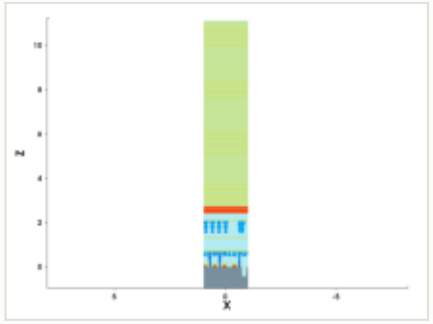


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

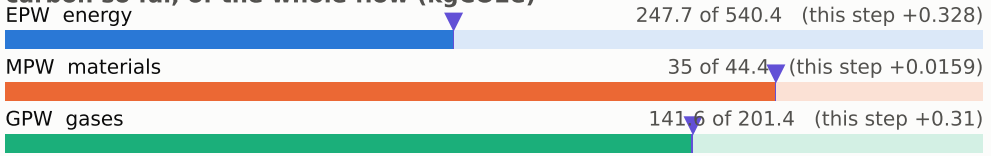

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

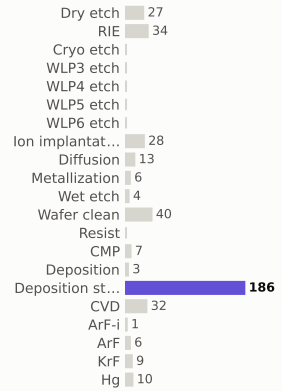

materials deposited (g)



gases emitted (g)

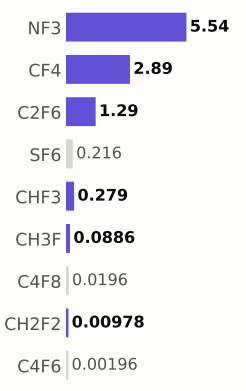

Step #6040: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	425.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




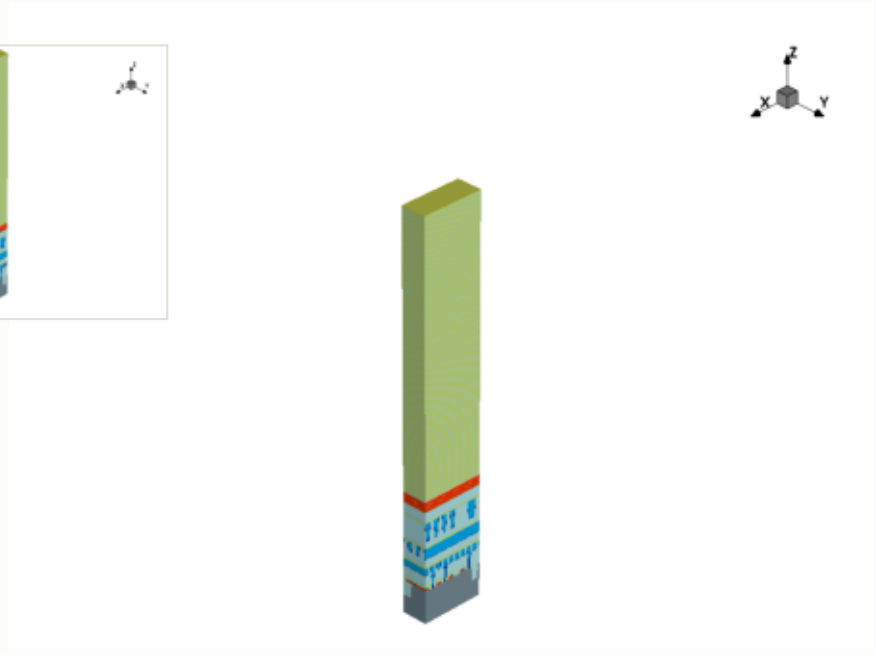

x cut at 0.000 µm

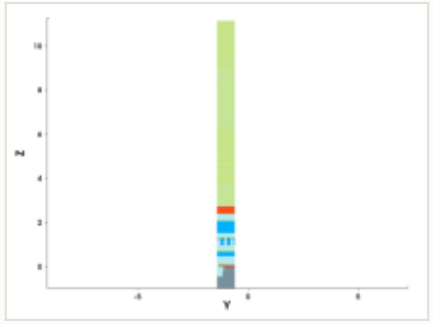

y cut at -1.035 µm

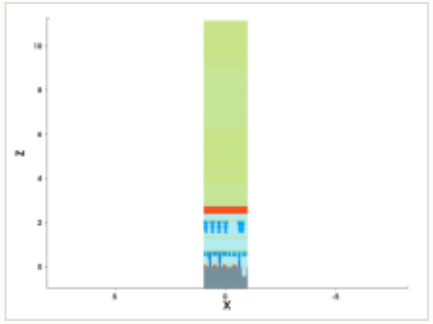


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

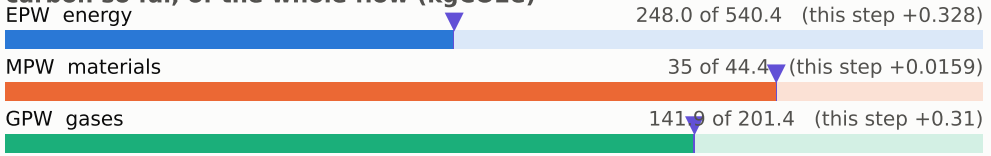

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

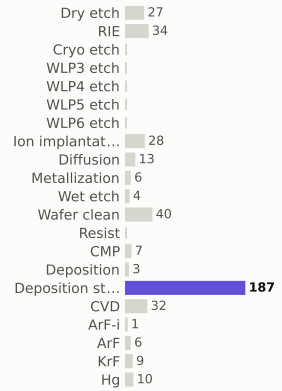

materials deposited (g)



gases emitted (g)

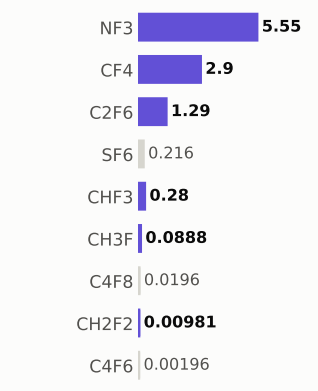


Step #6050: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	425.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

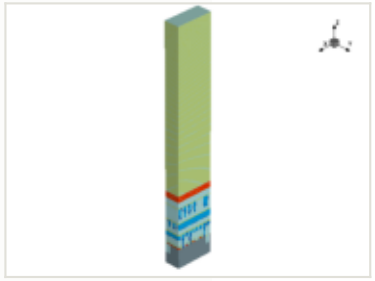


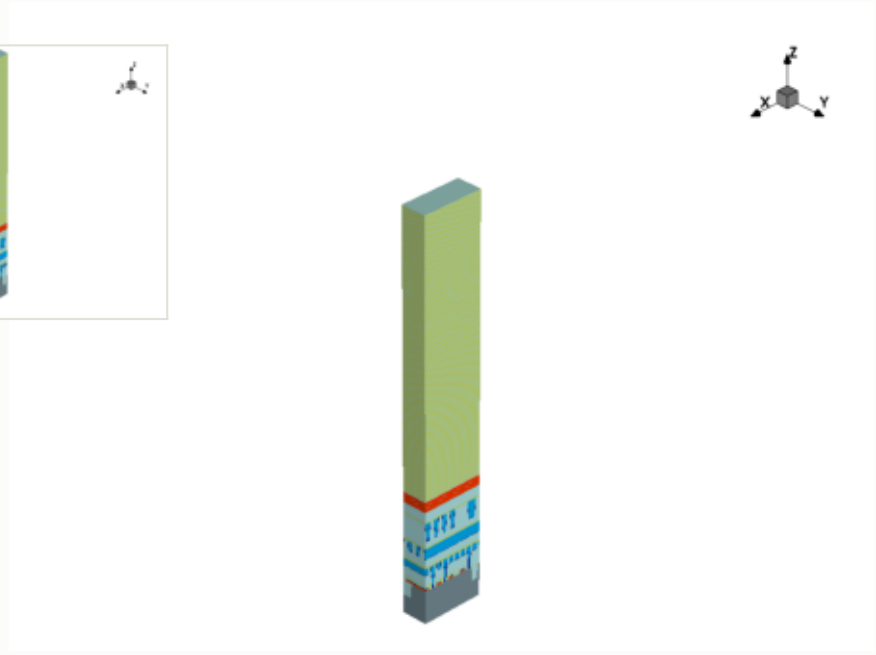

x cut at 0.000 µm

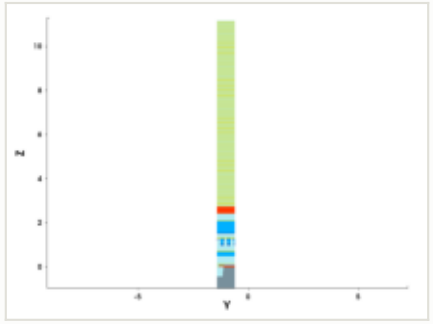

y cut at -1.035 µm

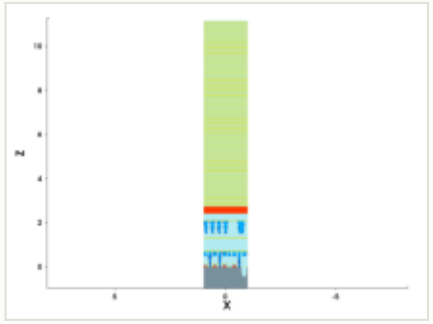

mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

EPW energy — 248.3 of 540.4 (this step +0.328)


MPW materials — 35.1 of 44.4 (this step +0.0159)

GPW gases — 142.2 of 201.4 (this step +0.31)


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

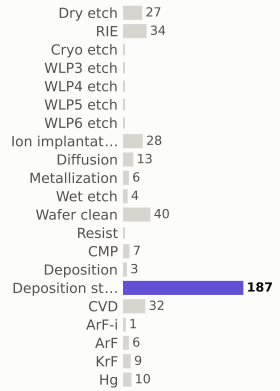

materials deposited (g)

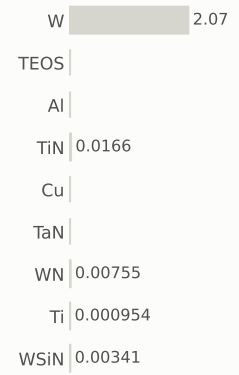

gases emitted (g)




Step #6060: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	426.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

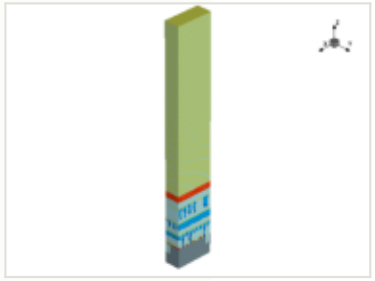


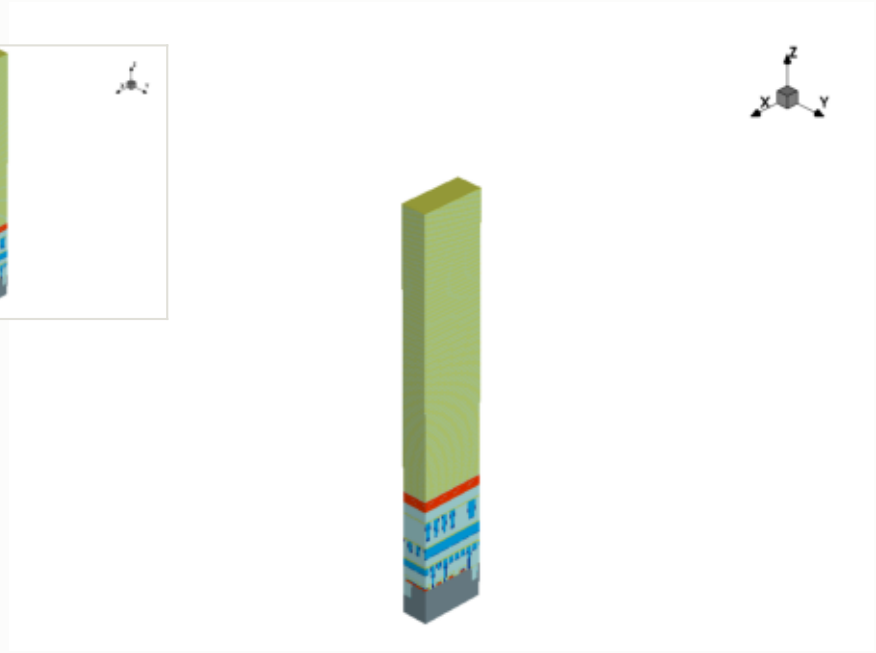

x cut at 0.000 µm

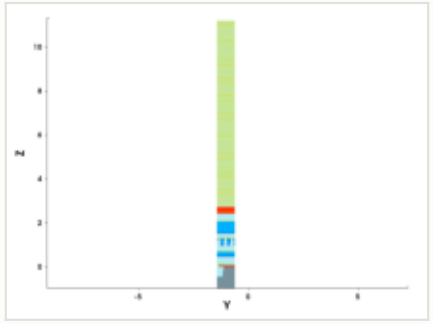

y cut at -1.035 µm

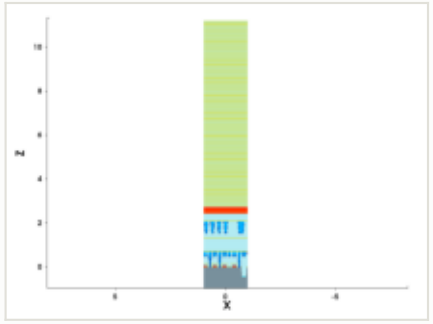


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

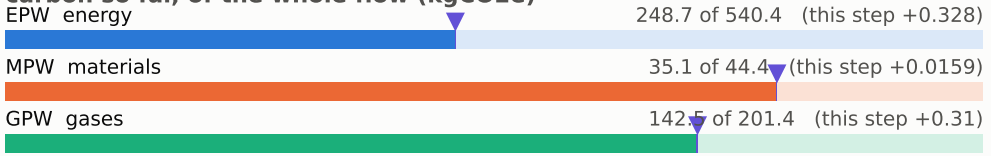

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

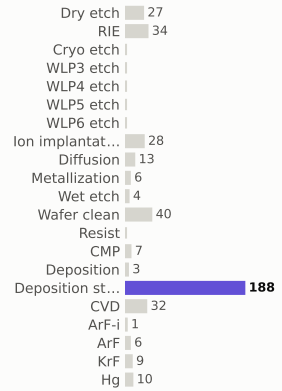

materials deposited (g)



gases emitted (g)

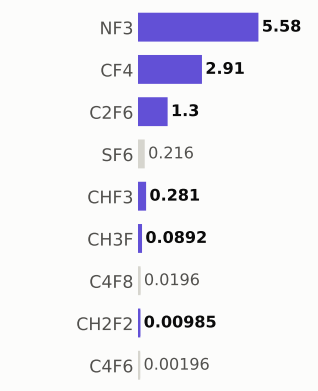


Step #6070: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	426.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

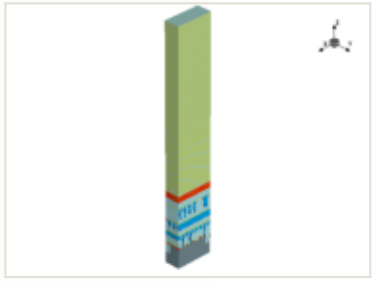


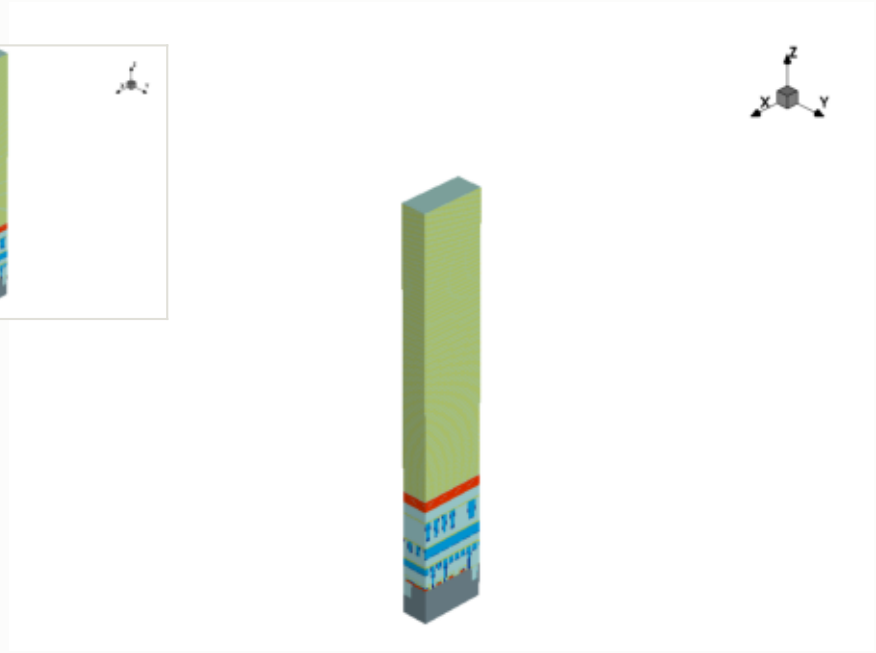

x cut at 0.000 µm

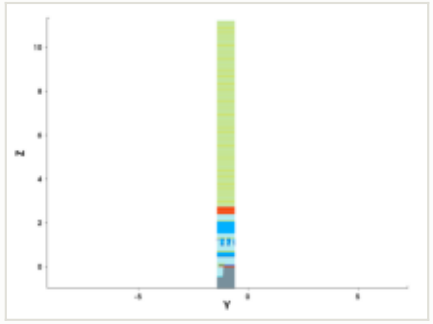

y cut at -1.035 µm

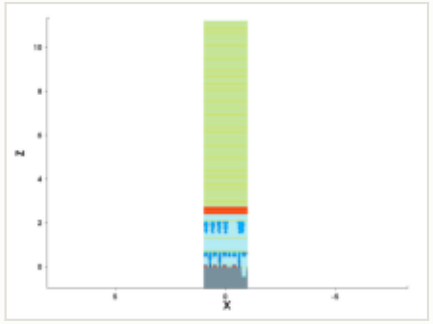


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

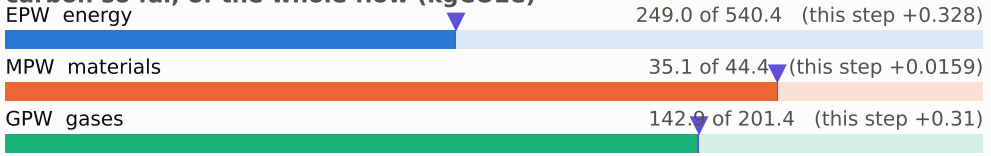

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

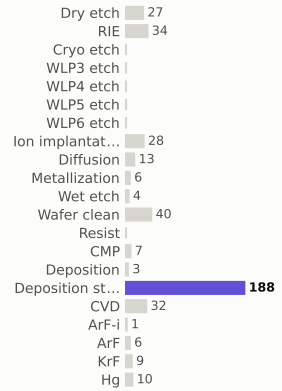

materials deposited (g)



gases emitted (g)




Step #6080: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	427.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

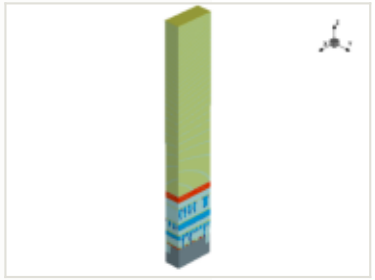


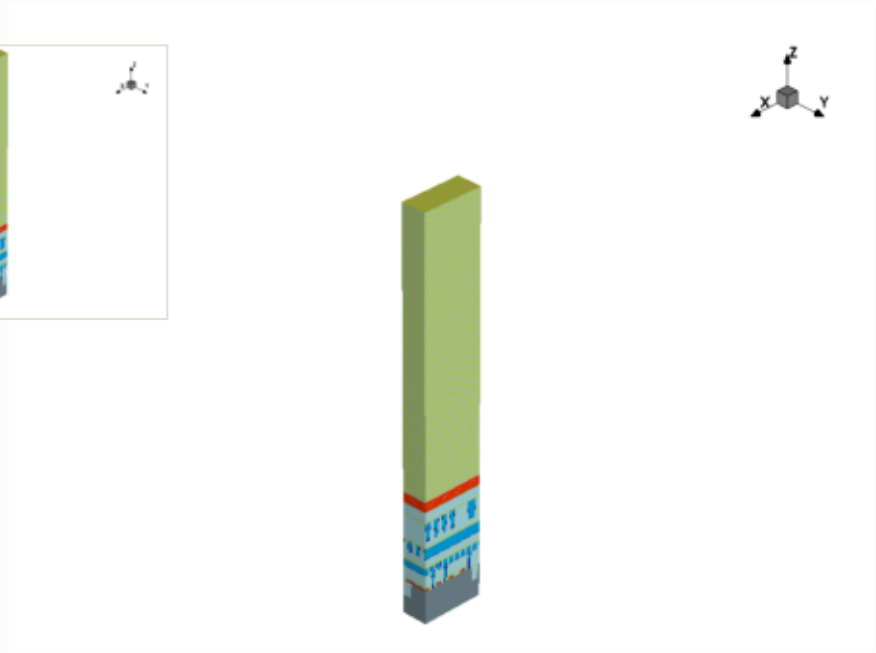

x cut at 0.000 µm

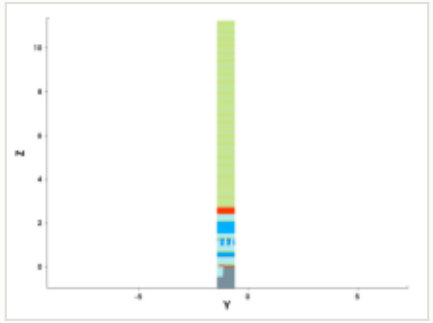

y cut at -1.035 µm

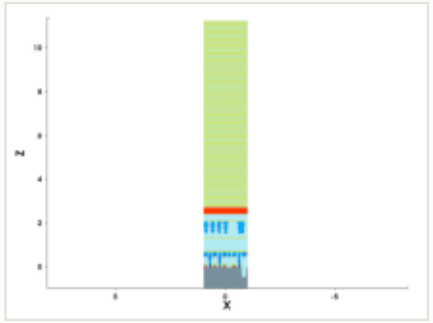


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

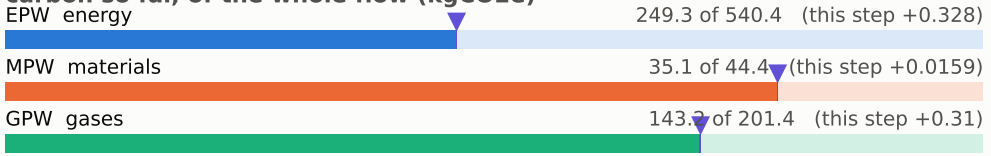

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

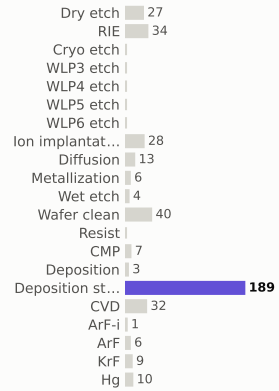

materials deposited (g)



gases emitted (g)

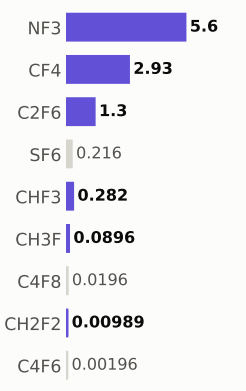


Step #6090: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	428.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

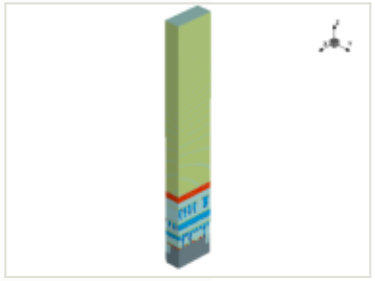


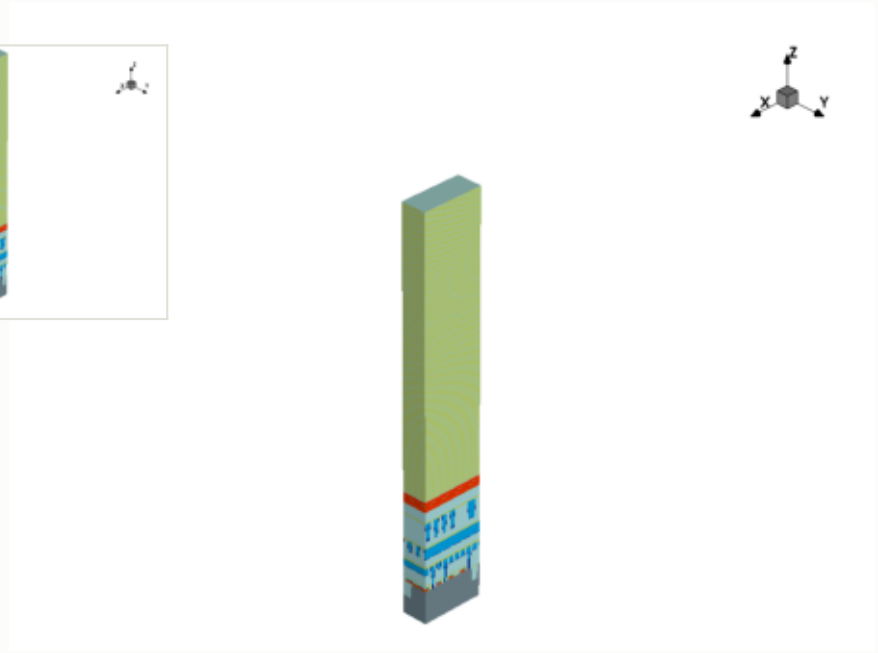


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

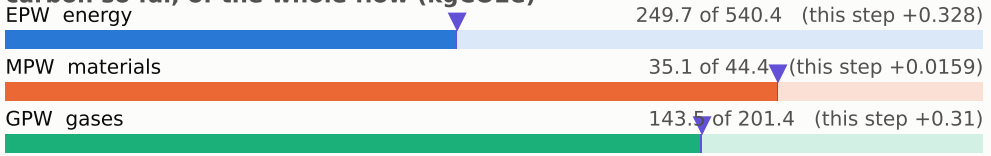


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

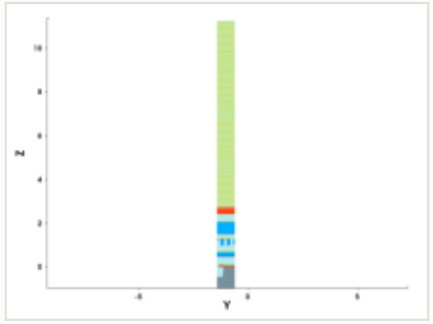


y cut at -1.035 µm

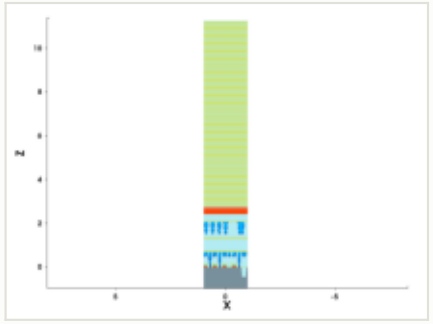


mask for this step

no mask for this step


steps by process area

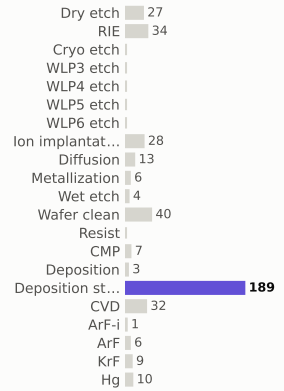

materials deposited (g)

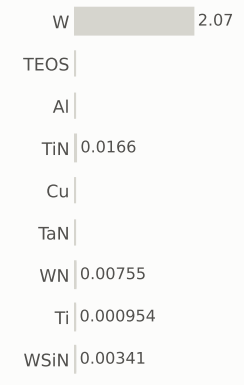

gases emitted (g)




Step #6100: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	428.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

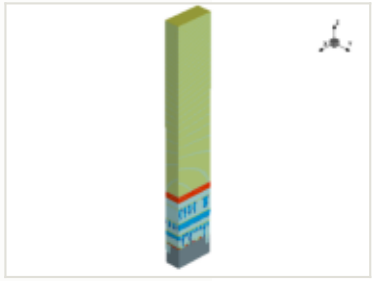


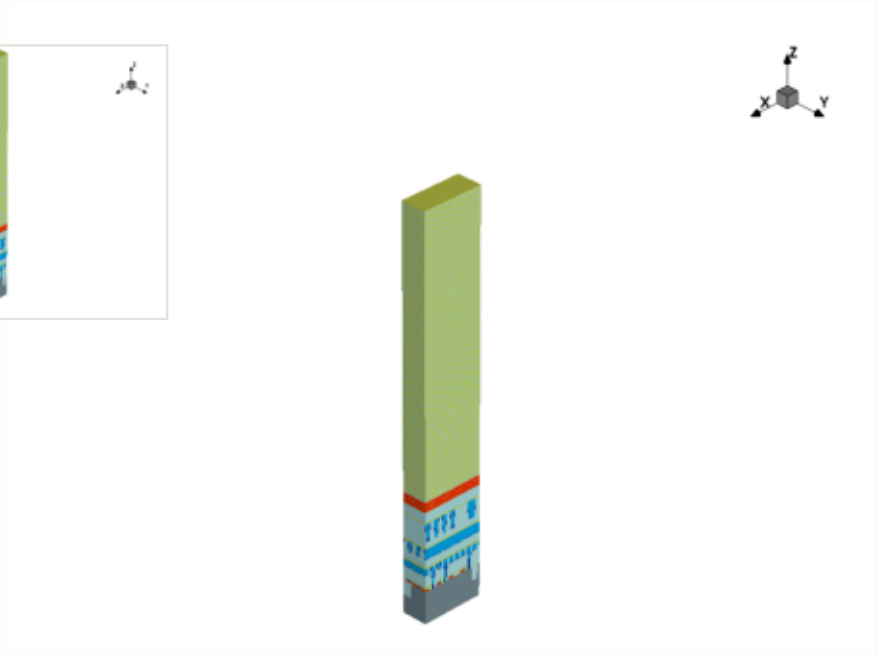


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

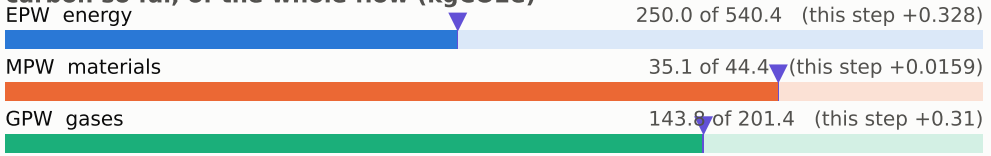


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

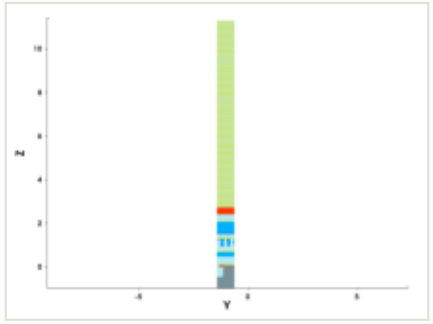


y cut at -1.035 µm

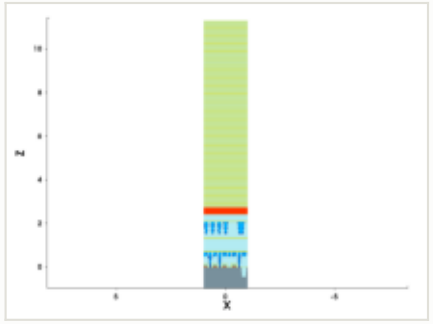


mask for this step

no mask for this step


steps by process area

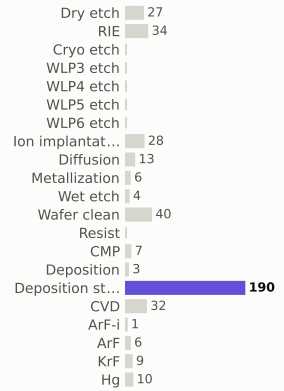

materials deposited (g)



gases emitted (g)

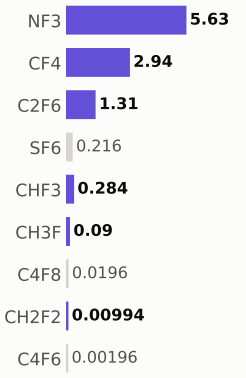


Step #6110: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	429.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

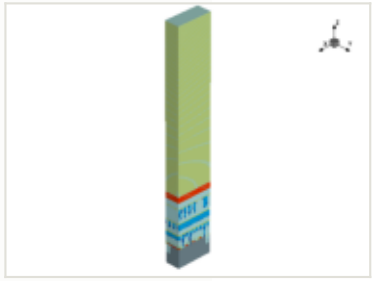


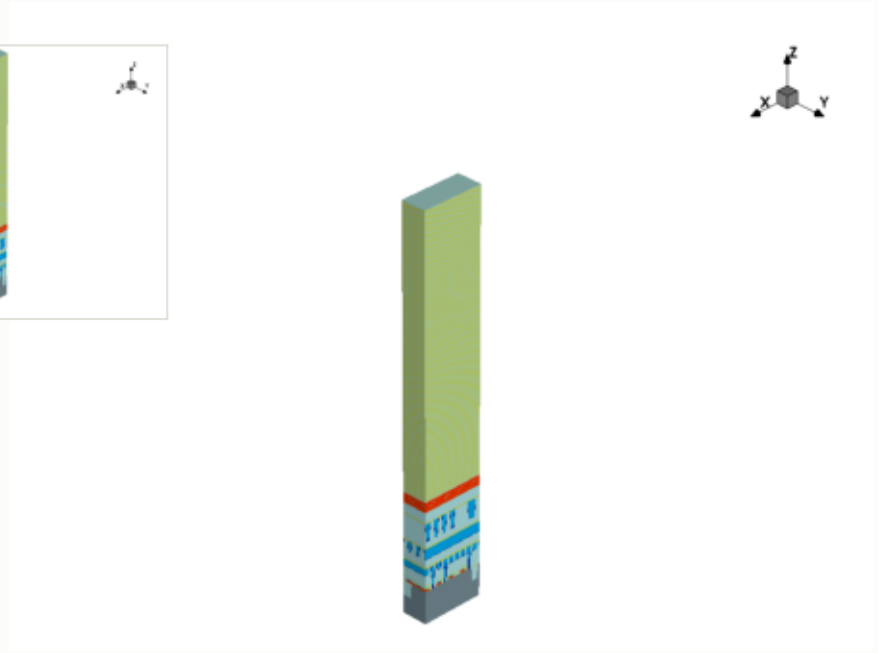


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

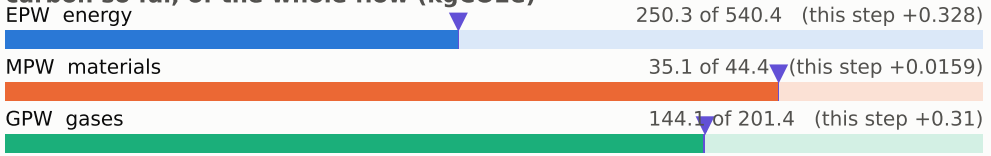


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

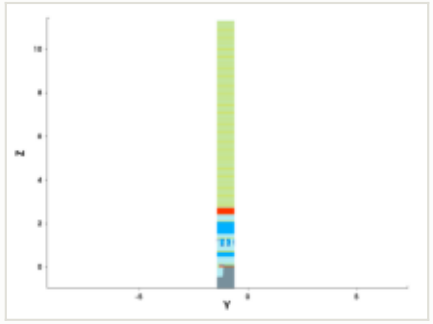


y cut at -1.035 µm

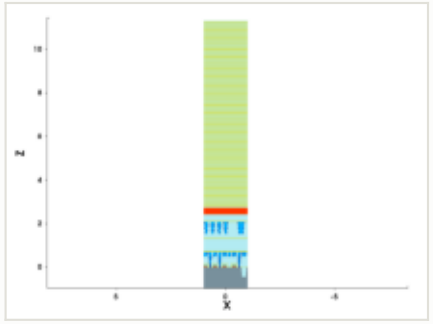


mask for this step

no mask for this step


steps by process area

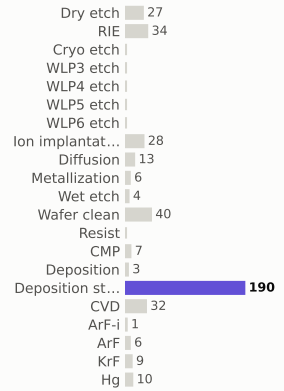

materials deposited (g)

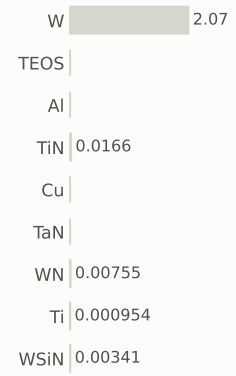

gases emitted (g)




Step #6120: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	430.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

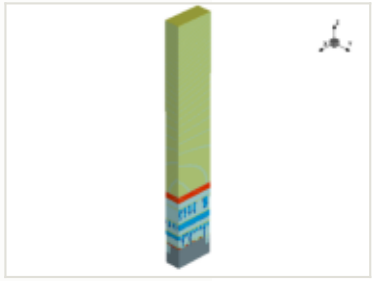


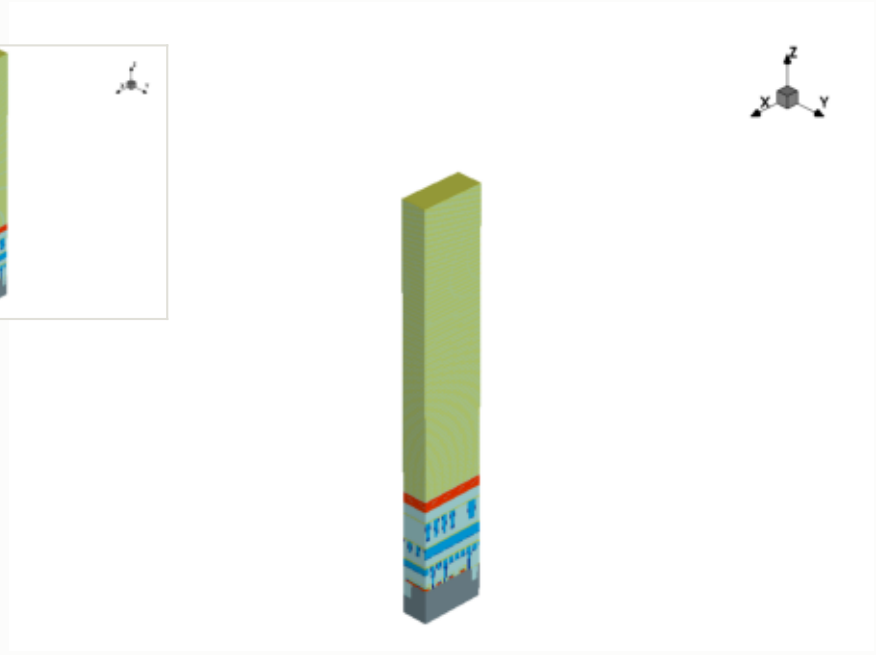

x cut at 0.000 µm

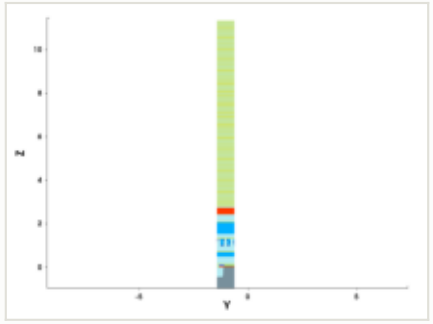

y cut at -1.035 µm

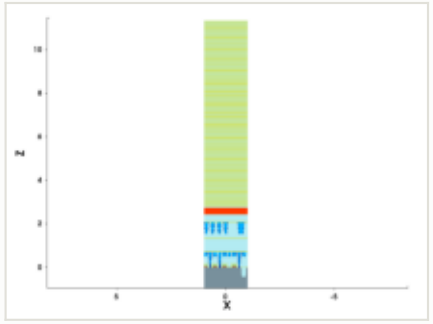


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

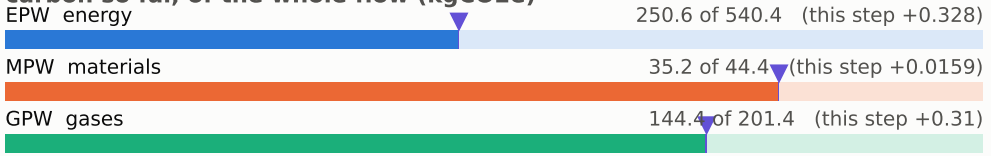

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

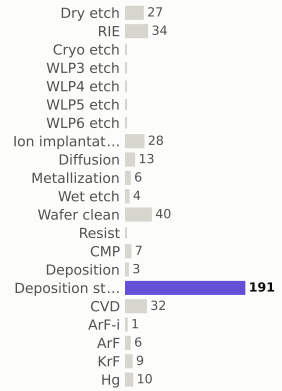

materials deposited (g)



gases emitted (g)

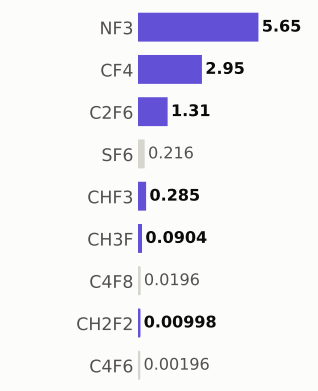


Step #6130: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	430.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

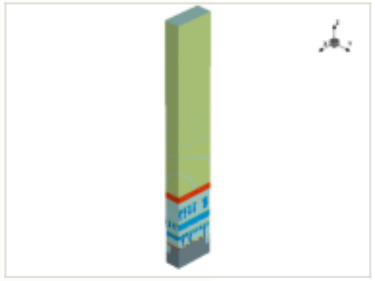


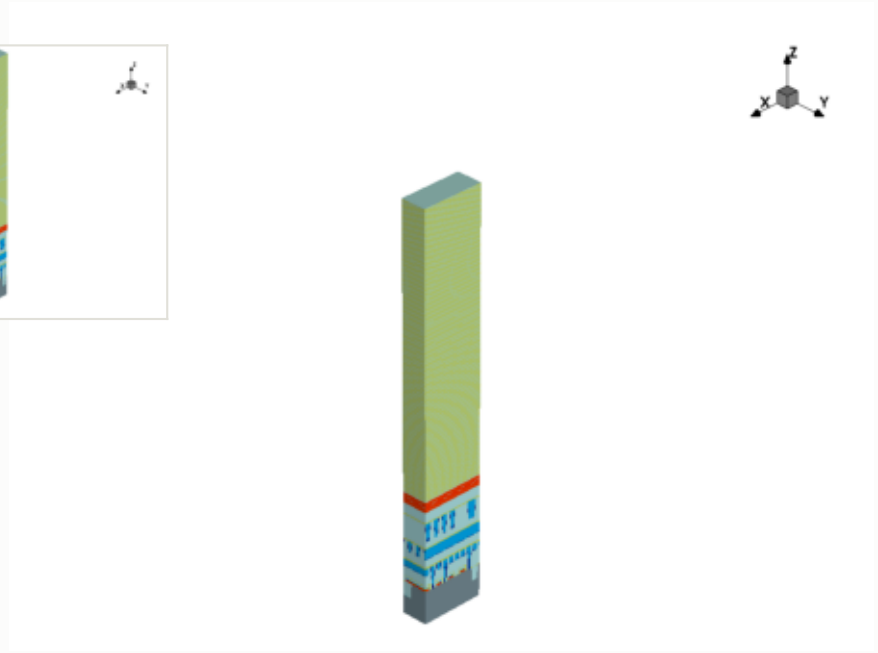

x cut at 0.000 µm

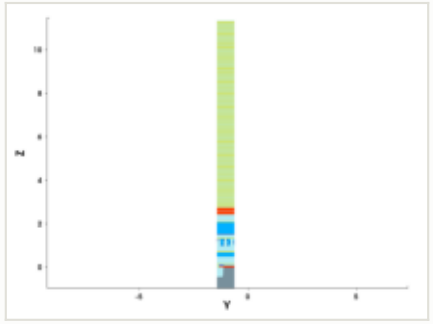

y cut at -1.035 µm

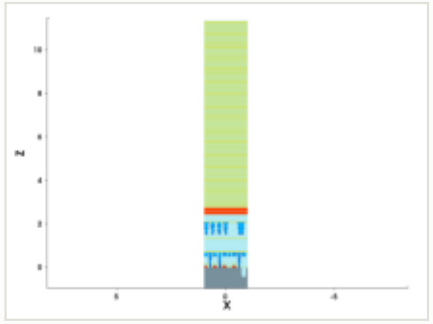


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

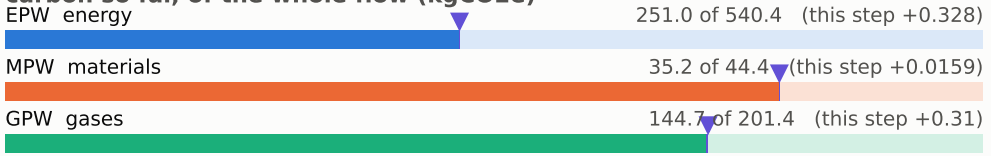

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

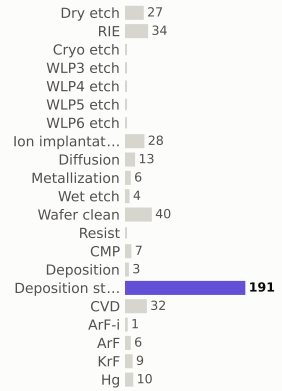

materials deposited (g)



gases emitted (g)




Step #6140: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	431.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

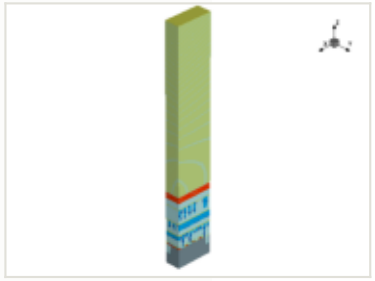


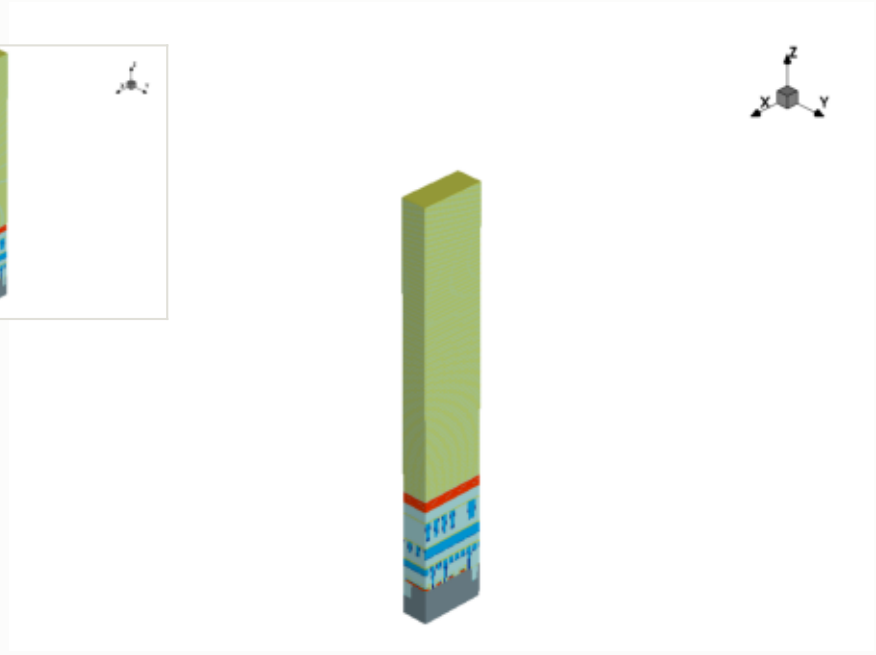

x cut at 0.000 µm

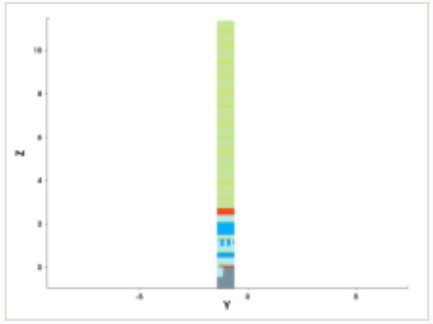

y cut at -1.035 µm

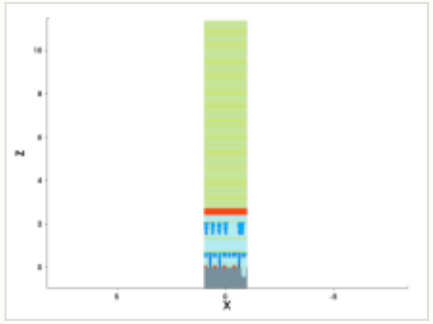


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

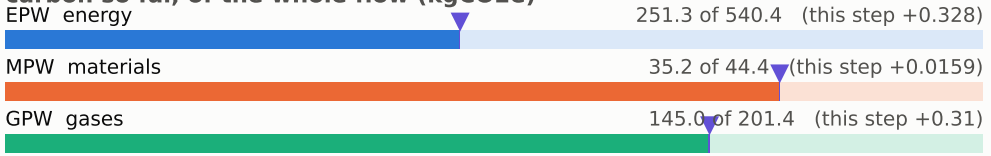

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

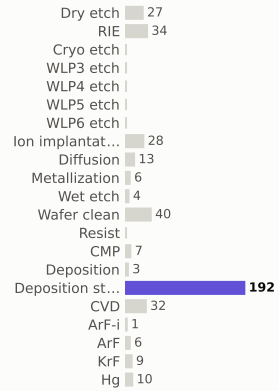

materials deposited (g)



gases emitted (g)

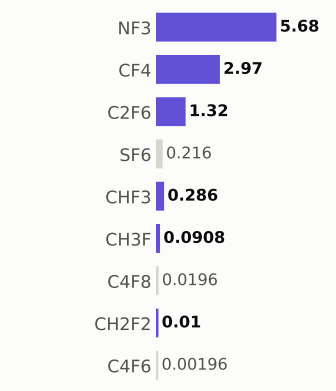


Step #6150: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	432.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

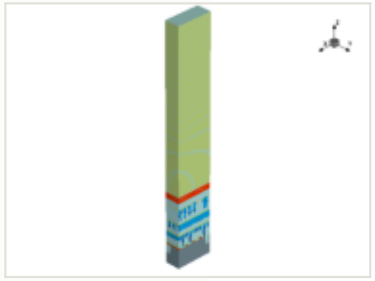


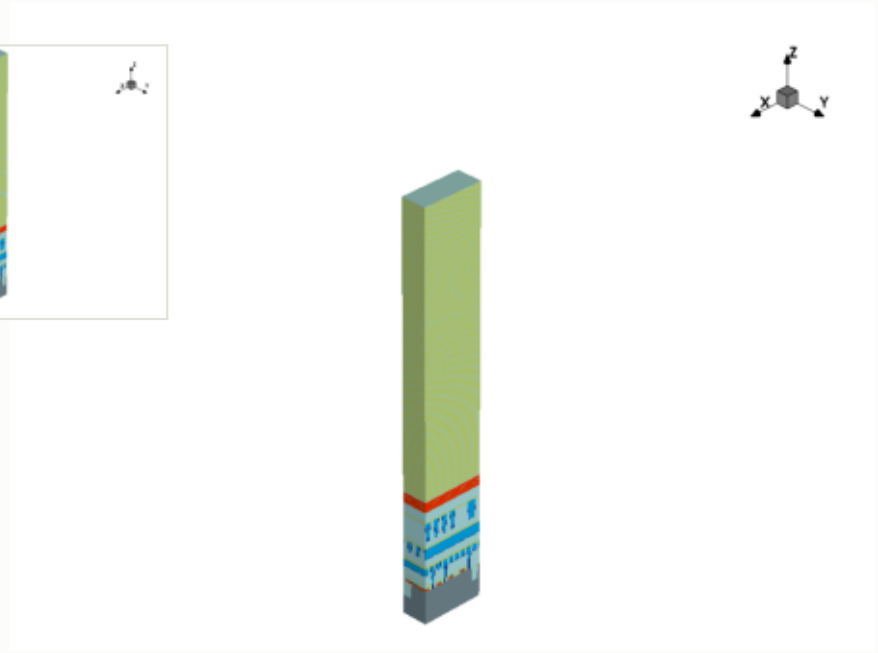

x cut at 0.000 µm

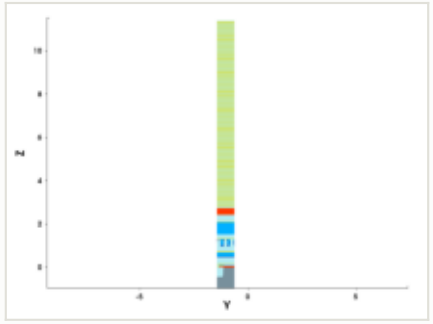

y cut at -1.035 µm

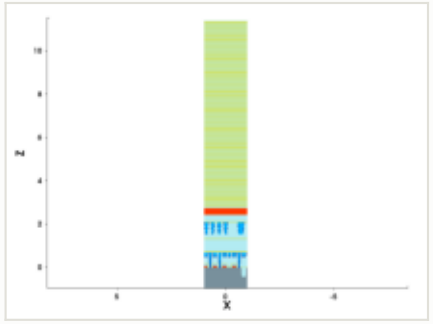


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

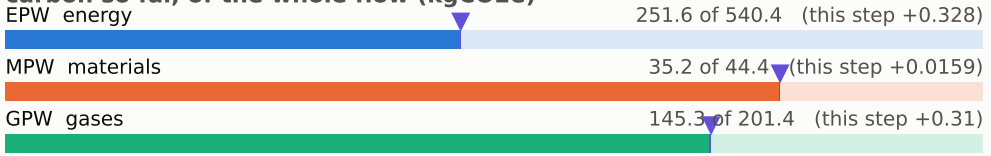

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

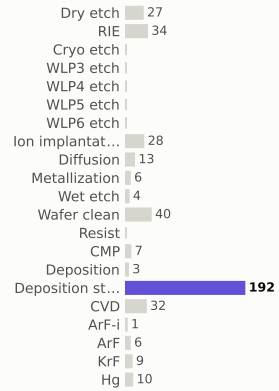

materials deposited (g)



gases emitted (g)

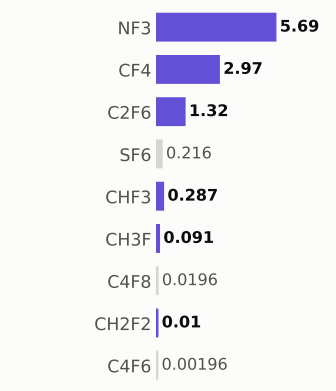


Step #6160: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	432.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

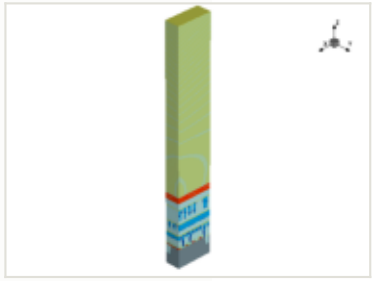


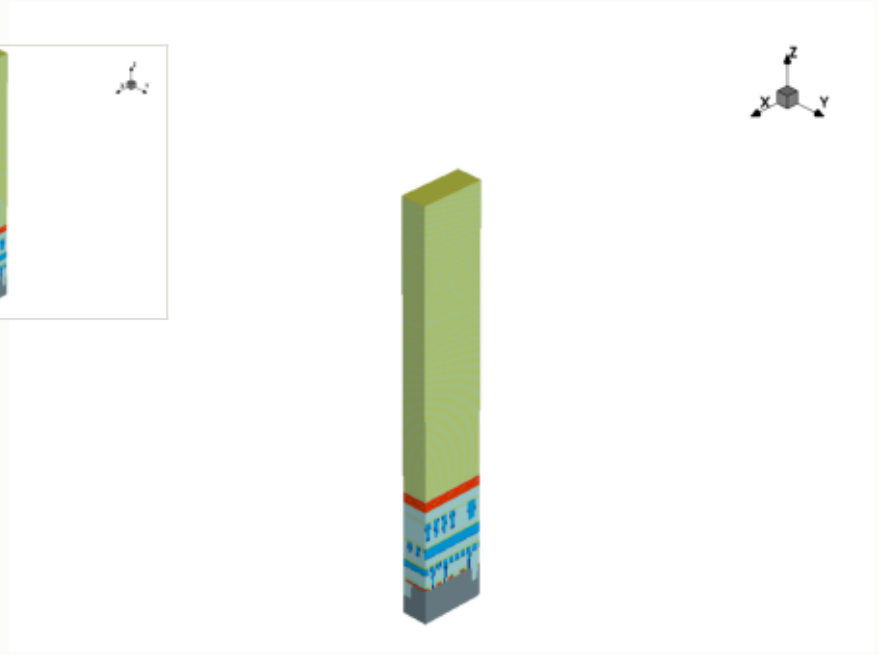


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

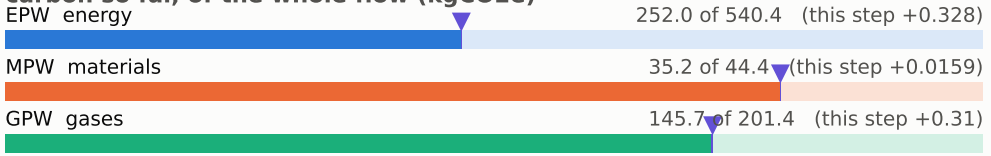


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

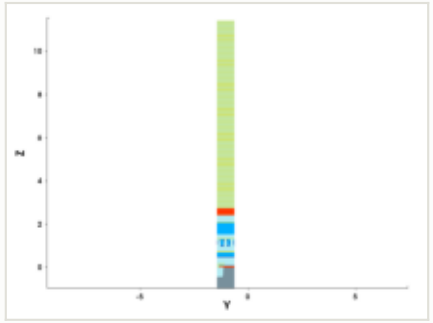


y cut at -1.035 µm

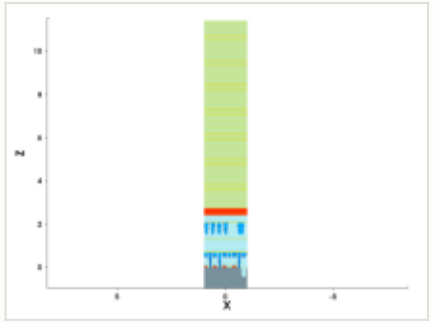


mask for this step

no mask for this step


steps by process area

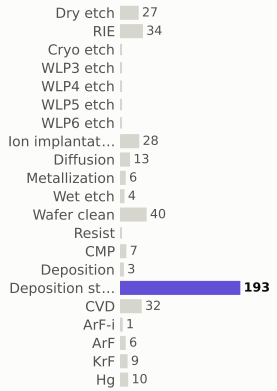

materials deposited (g)

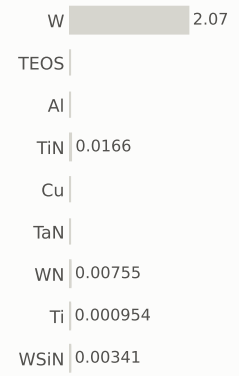

gases emitted (g)




Step #6170: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	433.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

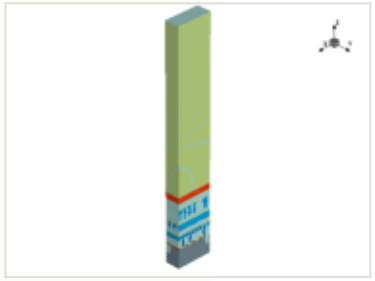


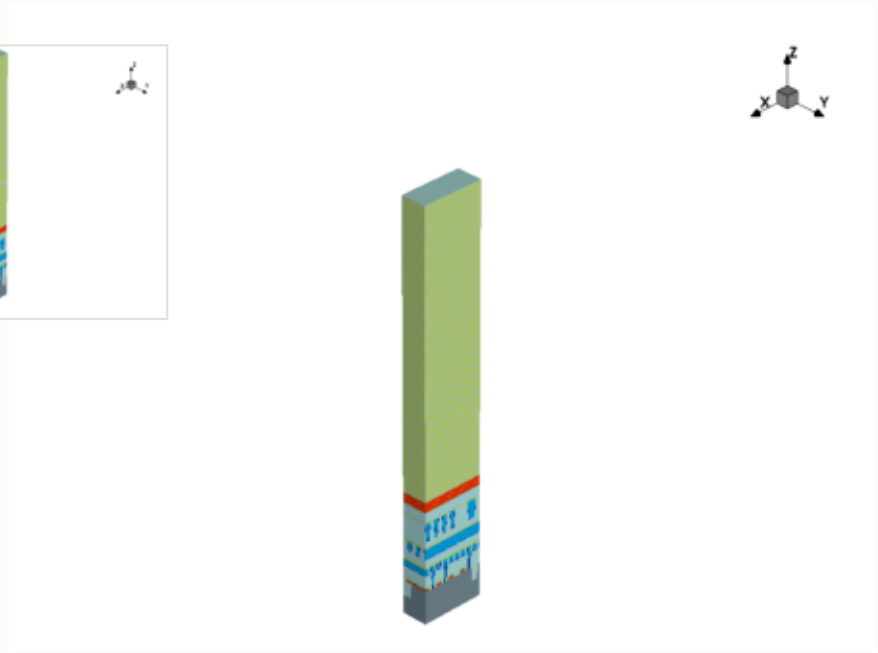

x cut at 0.000 µm

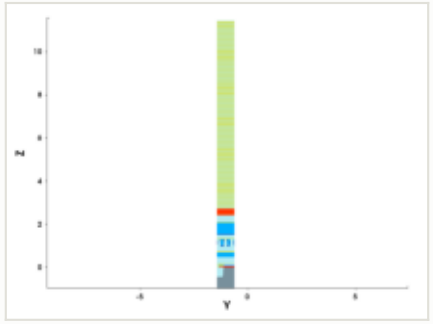

y cut at -1.035 µm

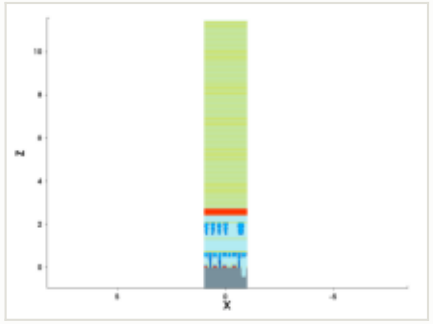


mask for this step

no mask for this step

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

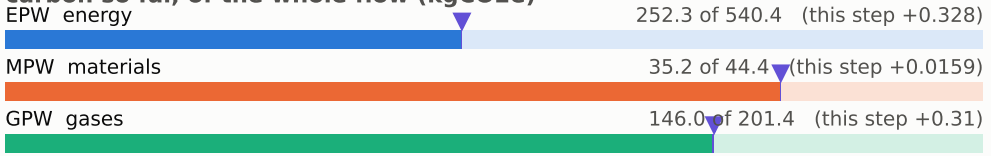

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

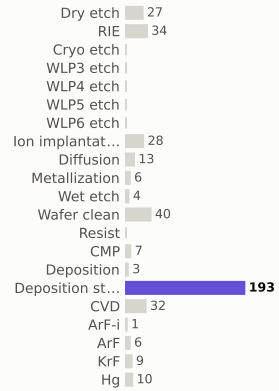

materials deposited (g)



gases emitted (g)

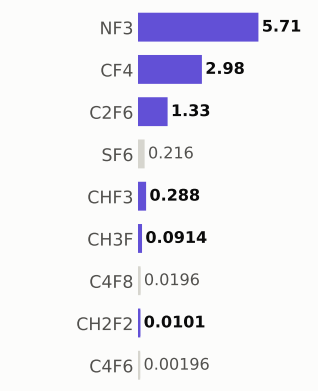


Step #6180: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	434.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

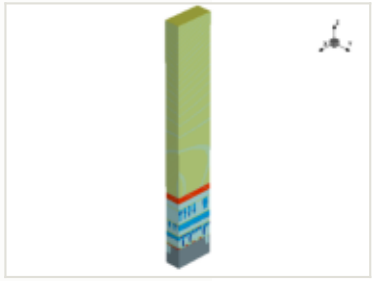


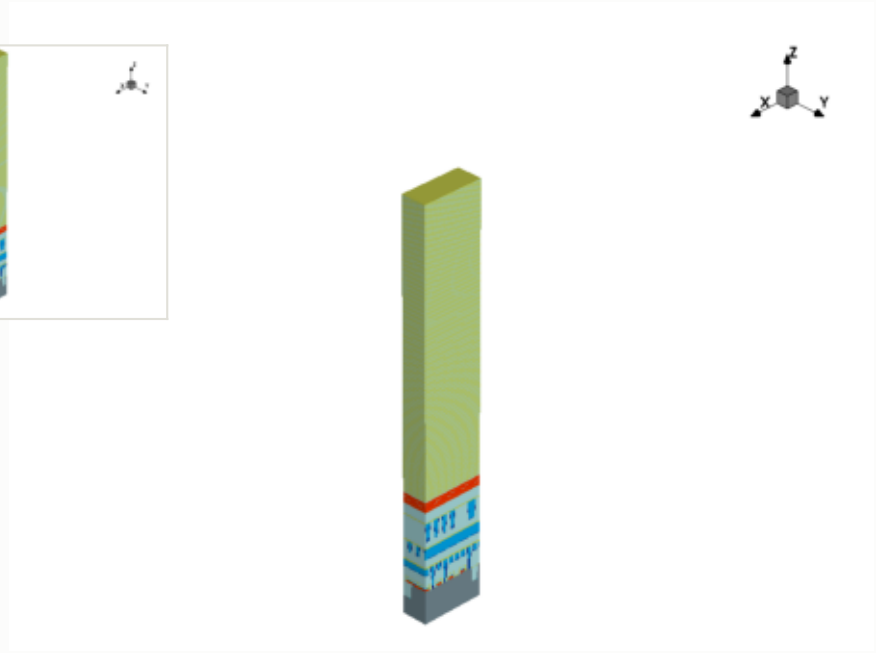


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

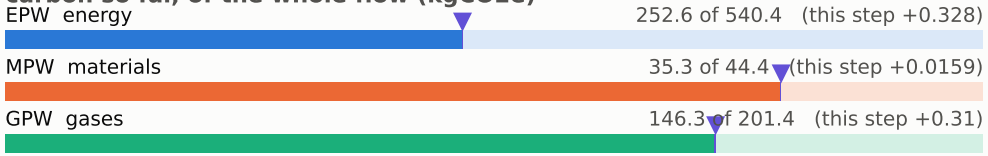


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

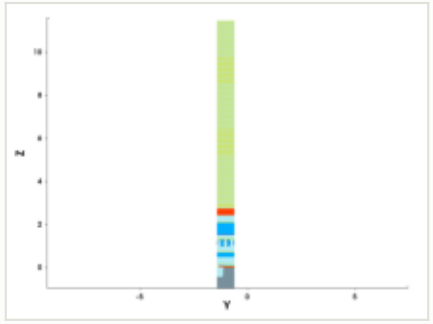


y cut at -1.035 µm

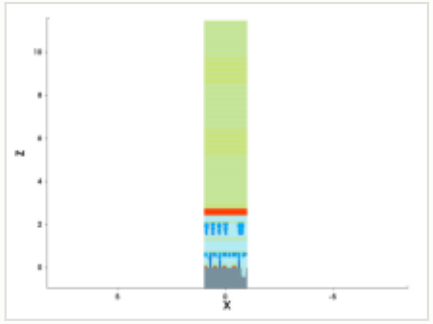

mask for this step

no mask for this step


steps by process area

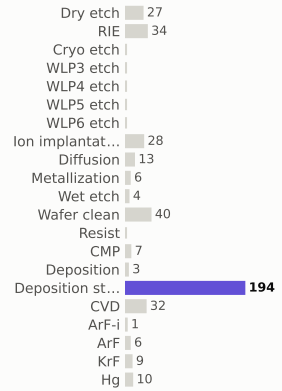

materials deposited (g)



gases emitted (g)




Step #6190: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	434.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

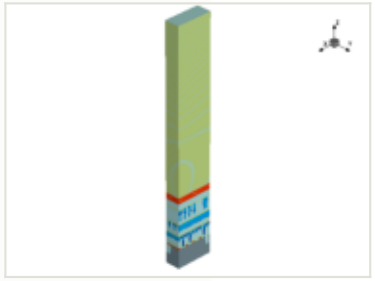


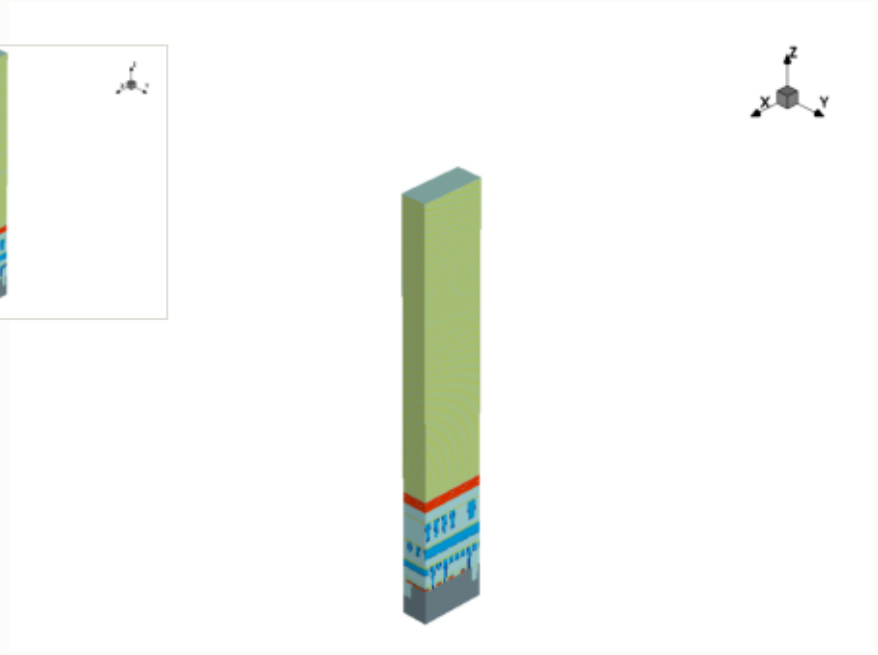


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

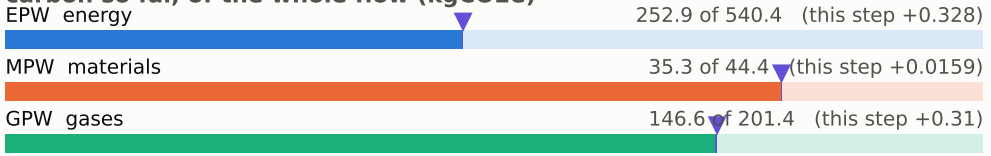


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

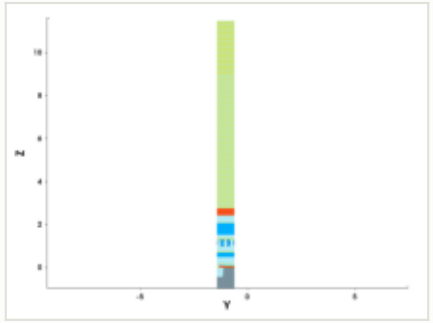


y cut at -1.035 µm

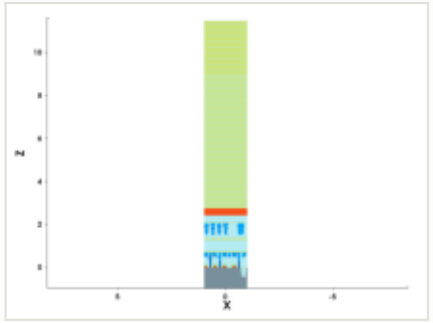


mask for this step

no mask for this step


steps by process area

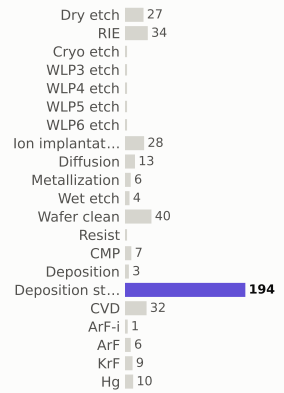

materials deposited (g)

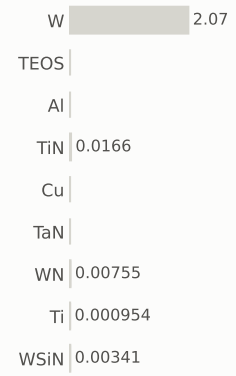

gases emitted (g)




Step #6200: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	435.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

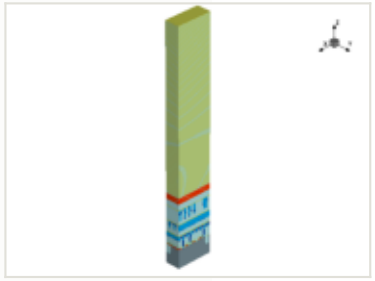


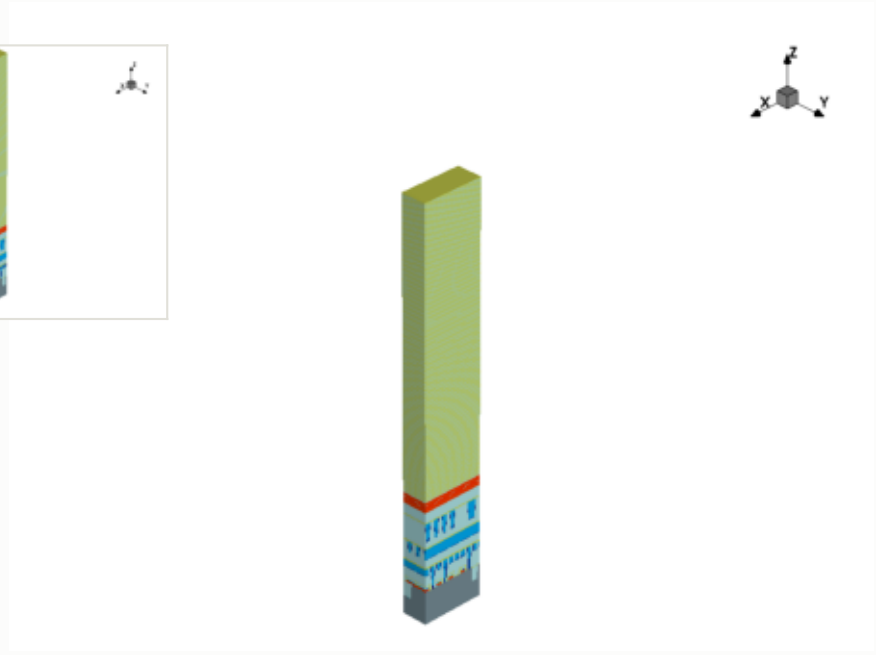


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

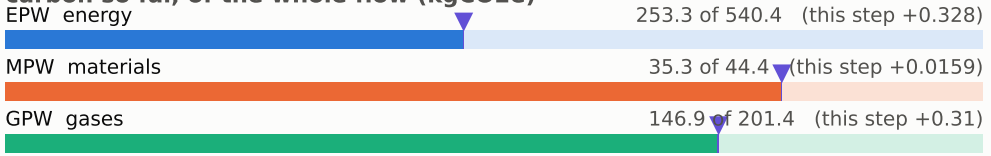


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

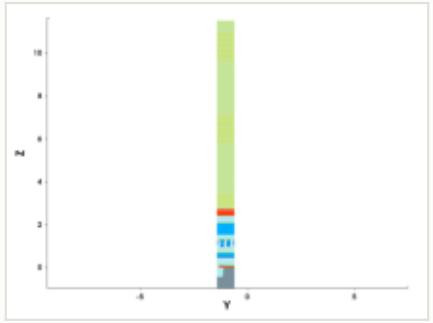


y cut at -1.035 µm

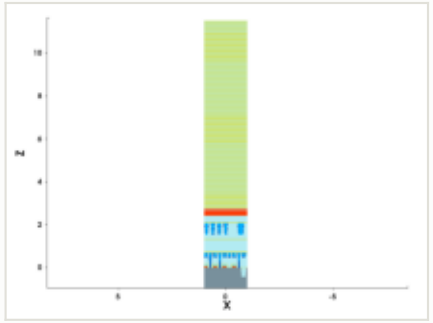


mask for this step

no mask for this step


steps by process area

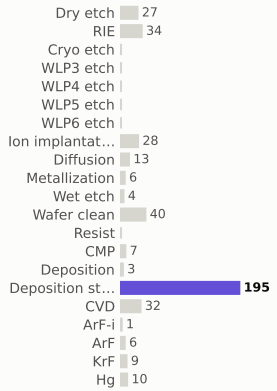

materials deposited (g)

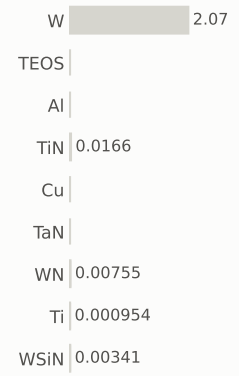

gases emitted (g)



Step #6210: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	436.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




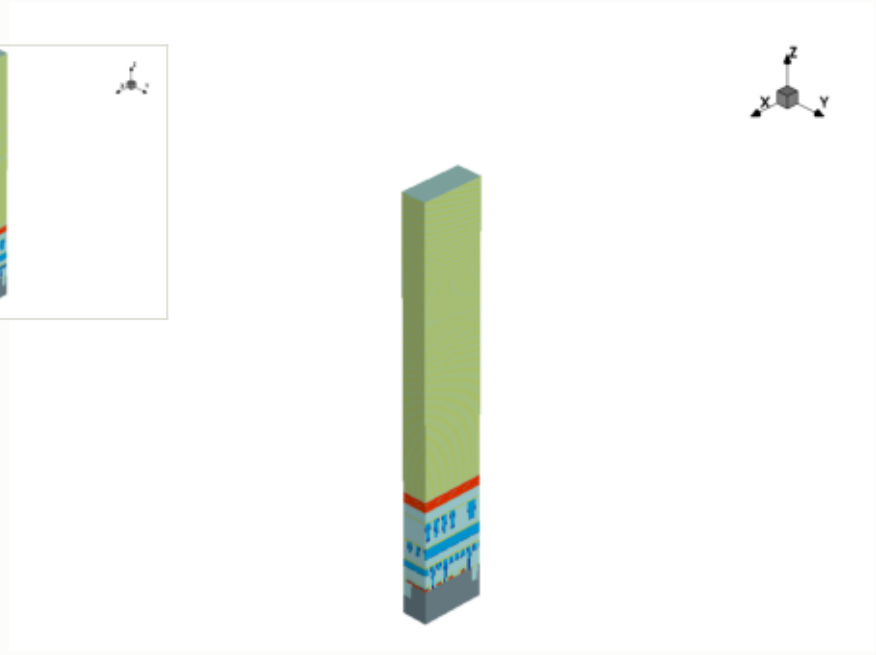


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

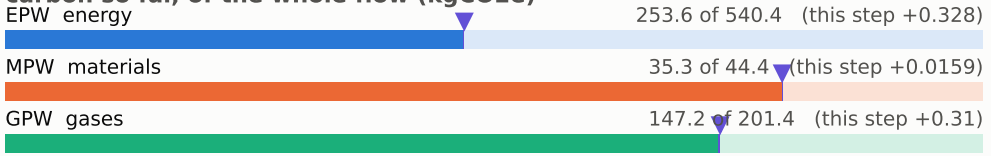


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

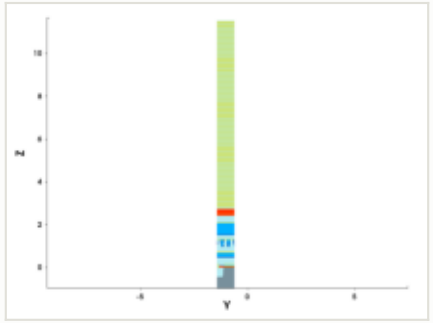


y cut at -1.035 µm

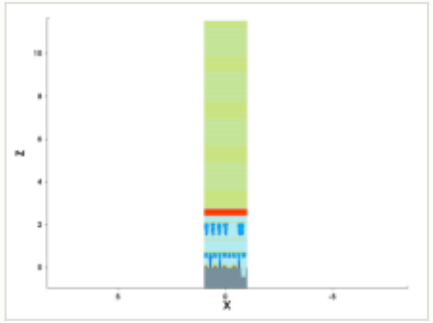


mask for this step

no mask for this step


steps by process area

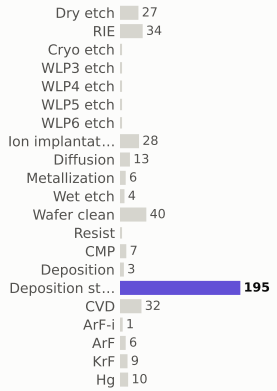

materials deposited (g)

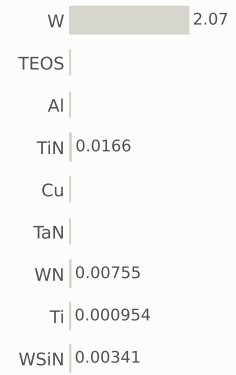

gases emitted (g)




Step #6220: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	436.8	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

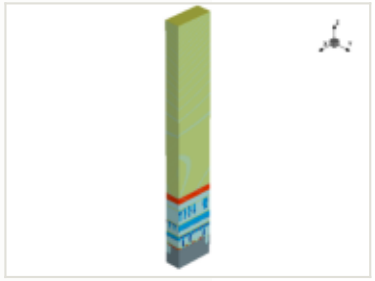


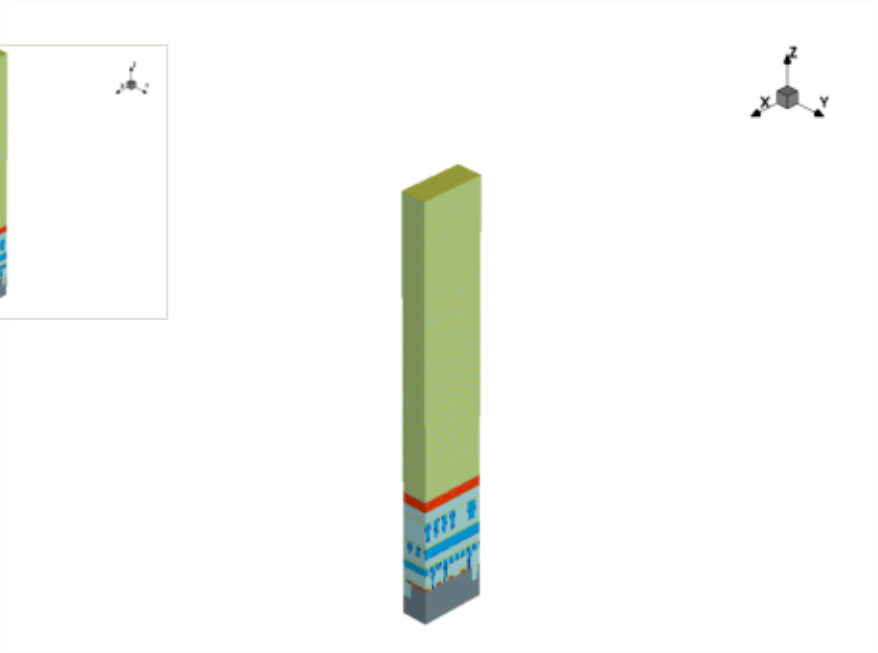

this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.028 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

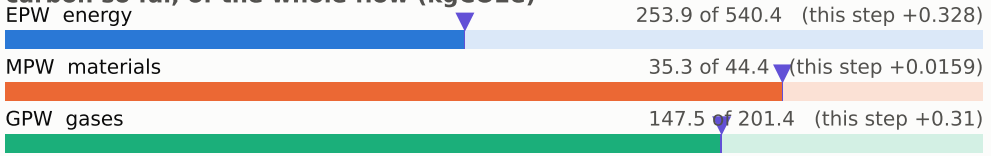


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

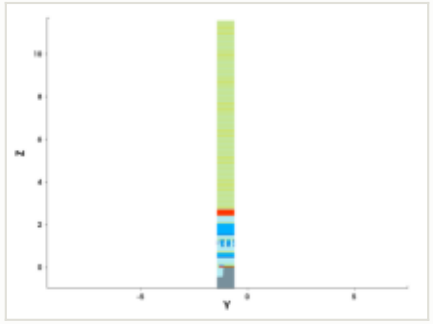


y cut at -1.035 µm

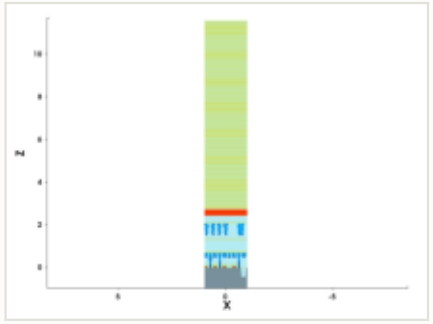


mask for this step

no mask for this step


steps by process area

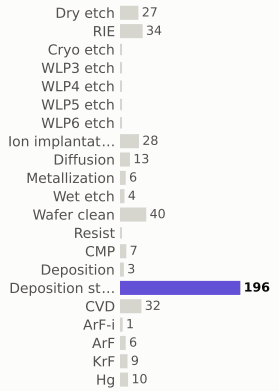

materials deposited (g)

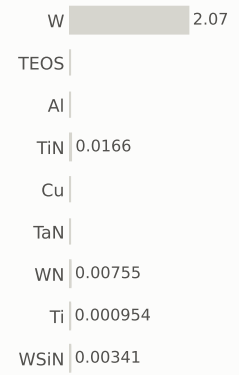

gases emitted (g)




Step #6230: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	437.4	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

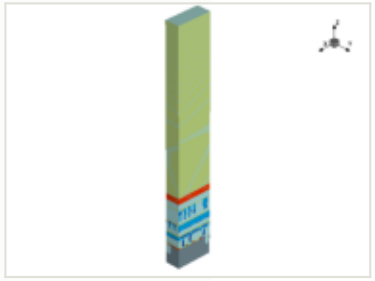


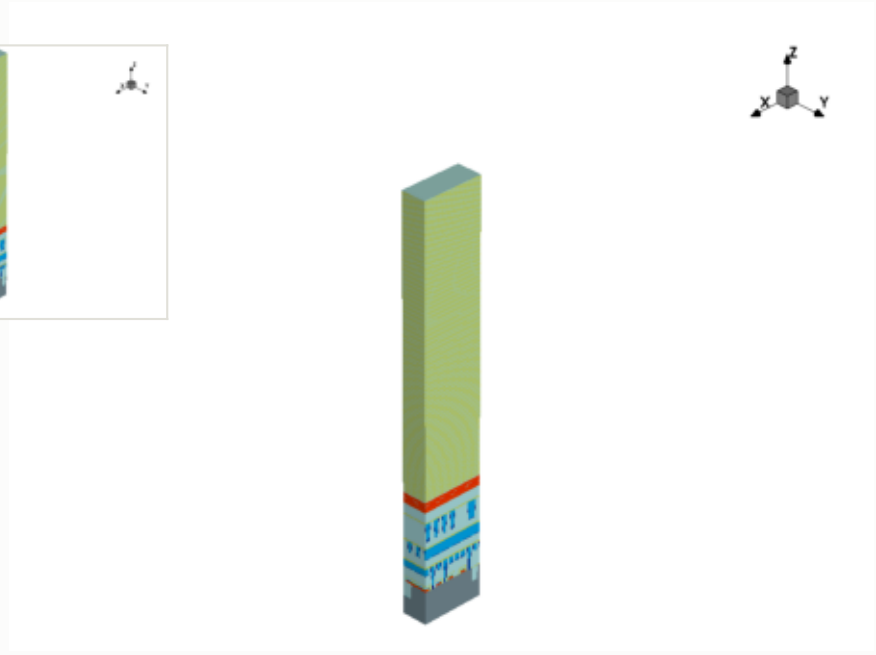


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.017 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

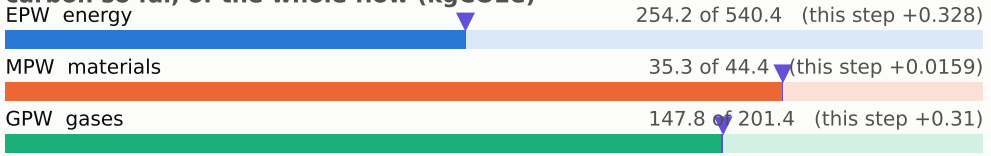


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

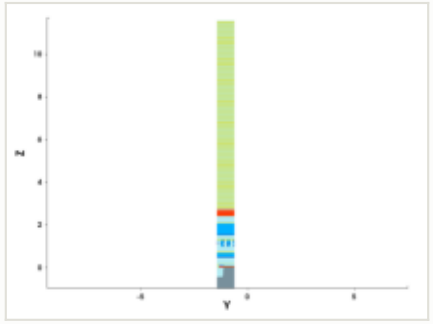


y cut at -1.035 µm

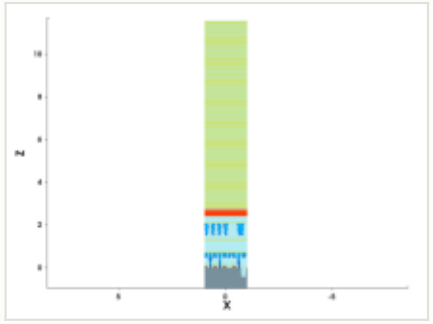

mask for this step

no mask for this step


steps by process area

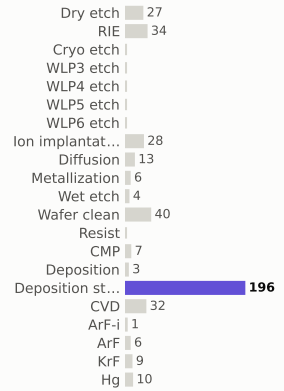

materials deposited (g)



gases emitted (g)

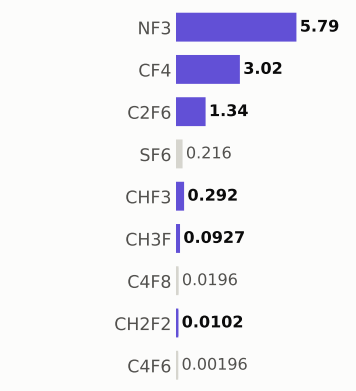

Step #6240: Deposition_stack


depo_anisotropic · Deposition_stack

0.654	438.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




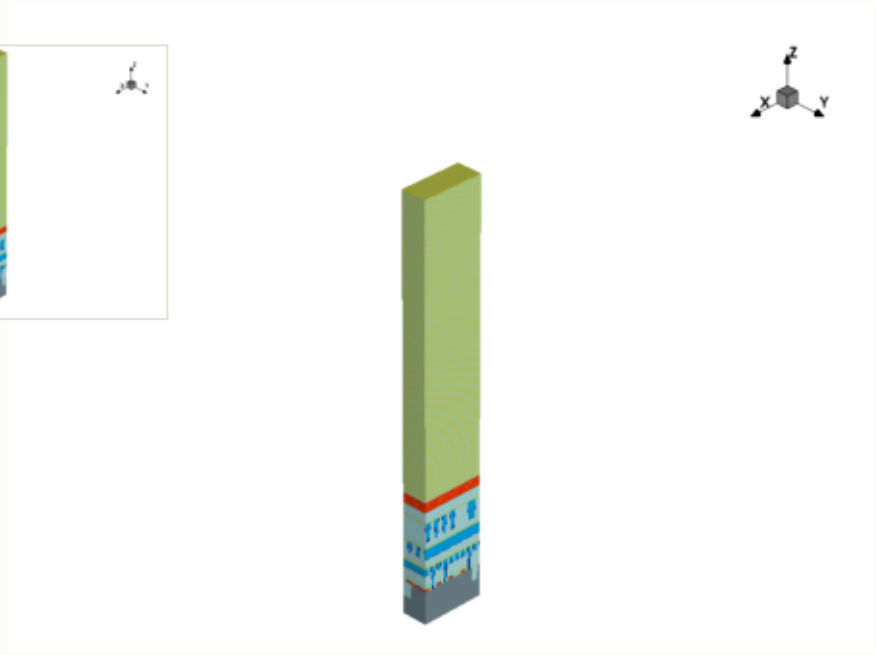

x cut at 0.000 µm

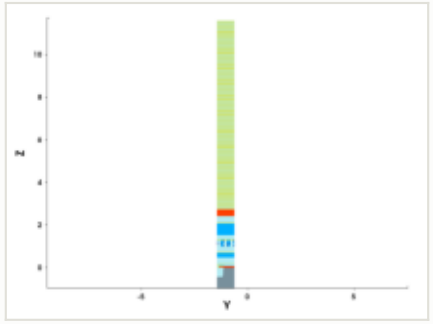

y cut at -1.035 µm

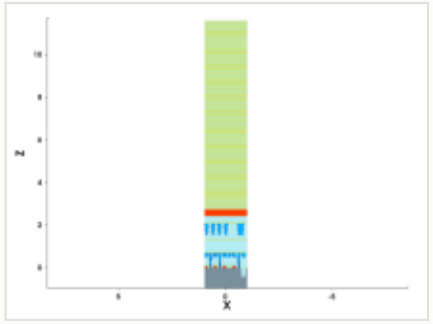


mask for this step

no mask for this step


this step

process area	Deposition_stack	EPW	0.328 kgCO2e
material	—	EPW tool	0.234 kgCO2e
thickness	0.025 µm	EPW overhead	0.0937 kgCO2e
material GWP	—	MPW	0.0159 kgCO2e (gas 0.0159)
input gases	NF3 1.27 g	GPW	0.31 kgCO2e
energy	0.545 kWh + 0.218 overhead	embodied carbon	**0.654 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

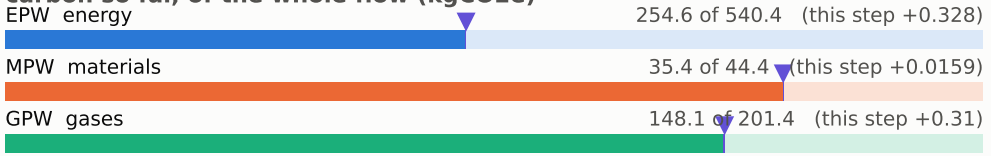

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

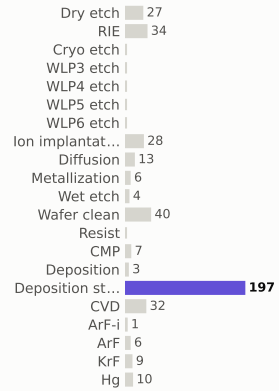

materials deposited (g)



gases emitted (g)




Step #6260: KrF


litho_patterning · KrF

0.199	438.3	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

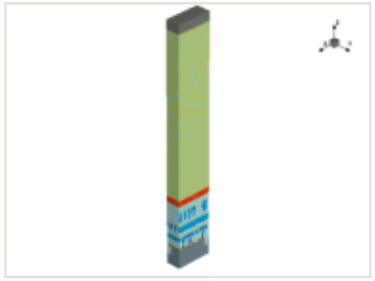

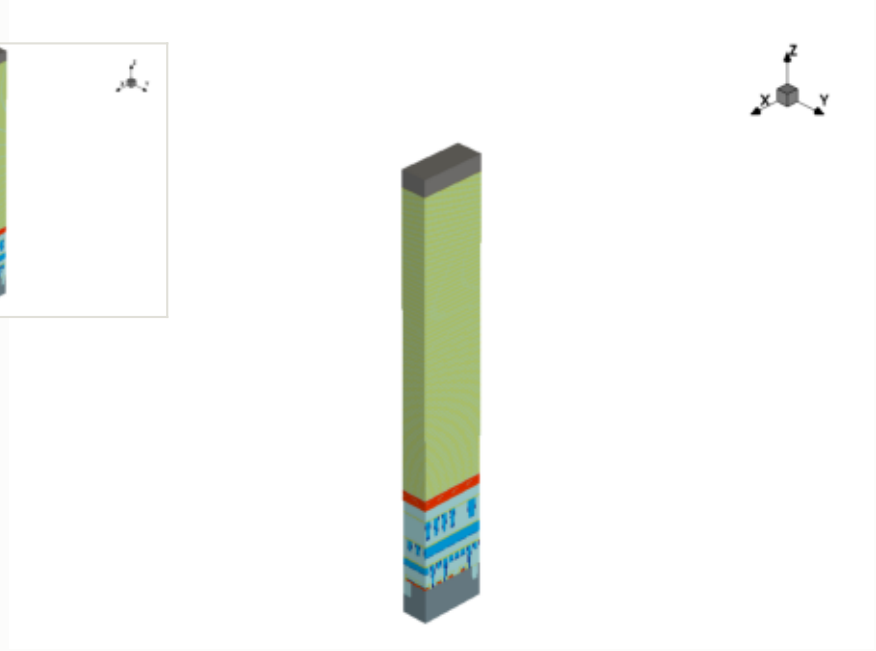


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

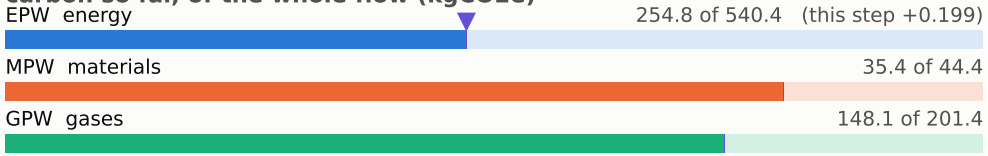


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

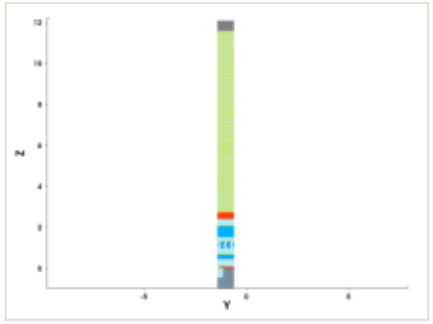


y cut at -1.035 µm

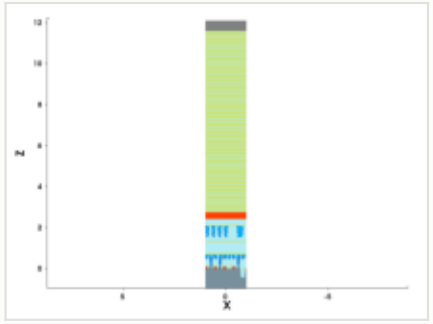


mask: layer 28:0, positive (OASIS)




steps by process area

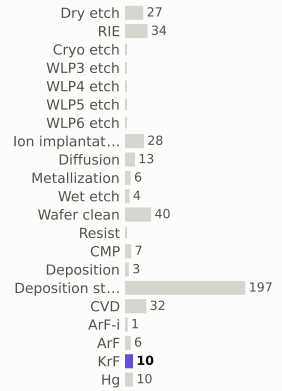

materials deposited (g)

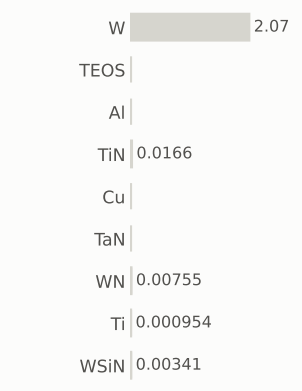

gases emitted (g)

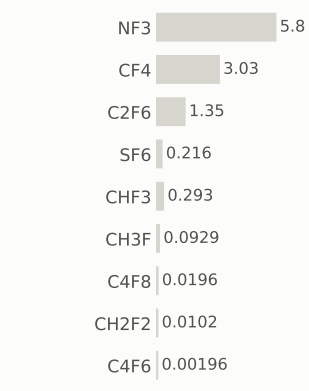


Step #6270: RIE


etch_anisotropic · RIE

1.04	439.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

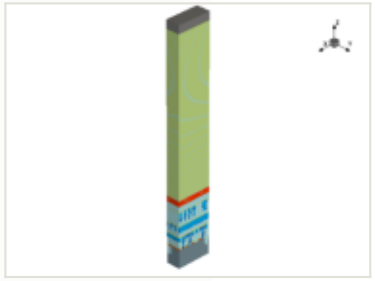

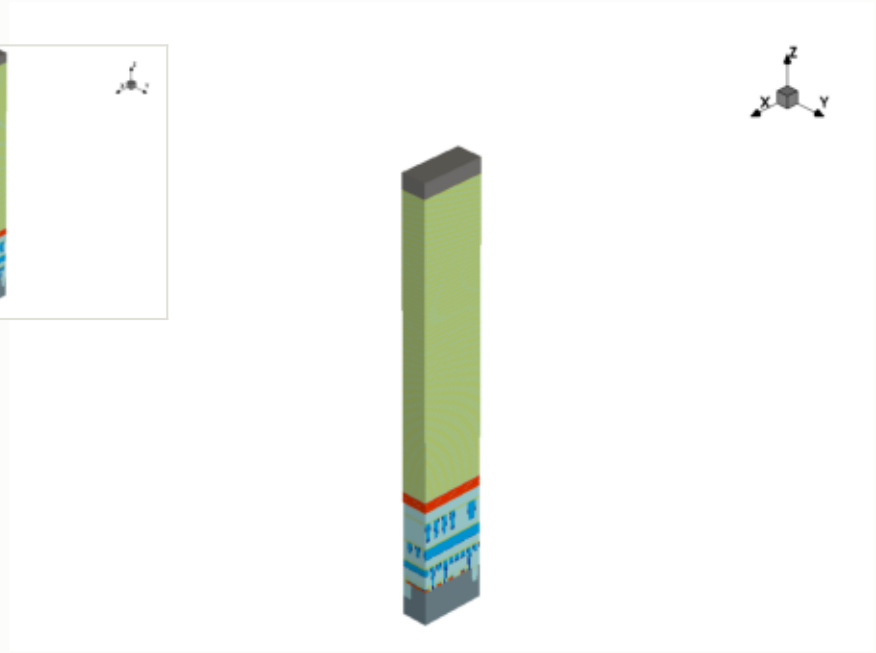


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

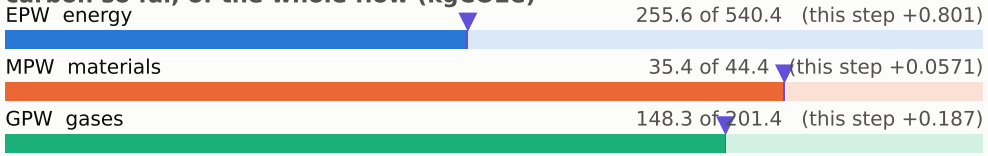


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

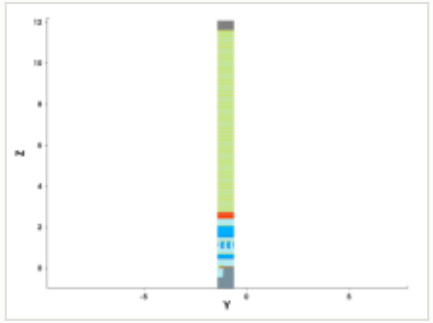


y cut at -1.035 µm

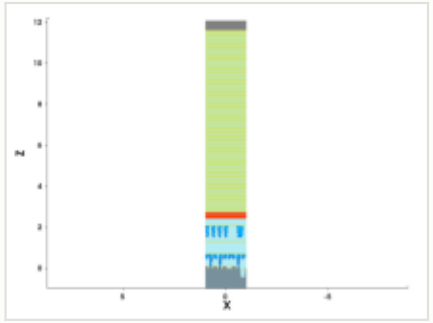


mask for this step

no mask for this step


steps by process area

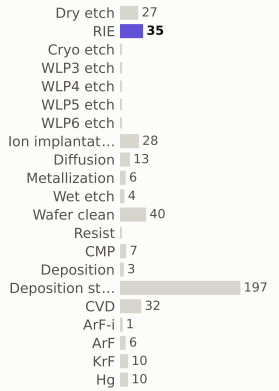

materials deposited (g)

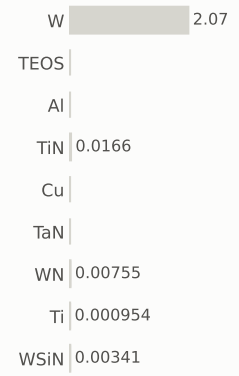

gases emitted (g)




Step #6280: RIE


etch_anisotropic · RIE

1.04	440.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

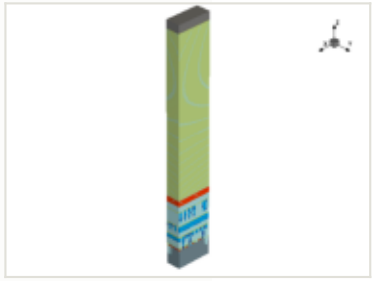

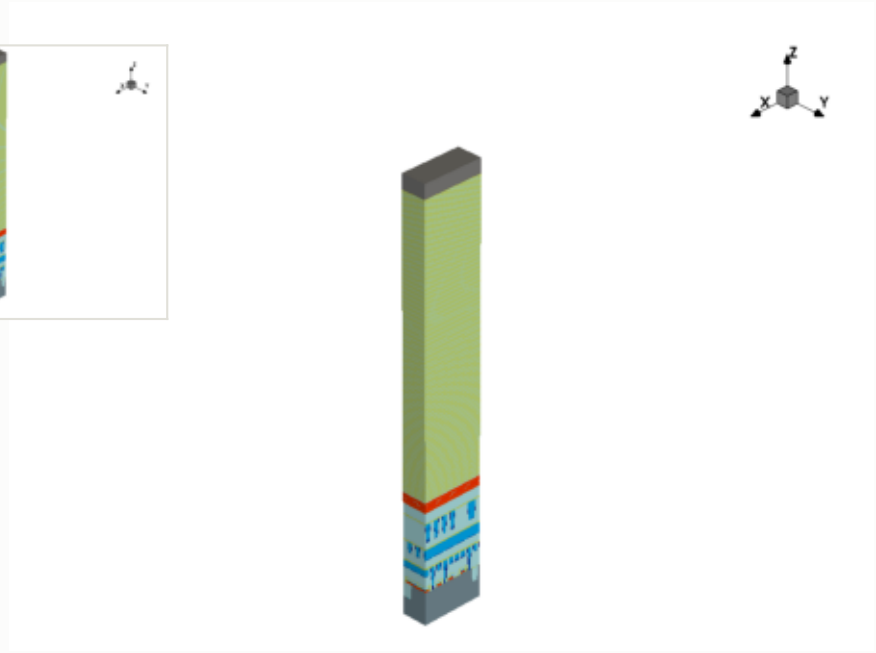


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

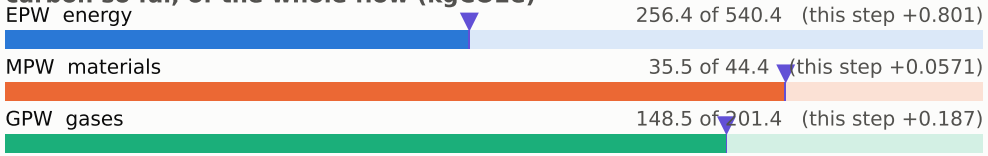


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

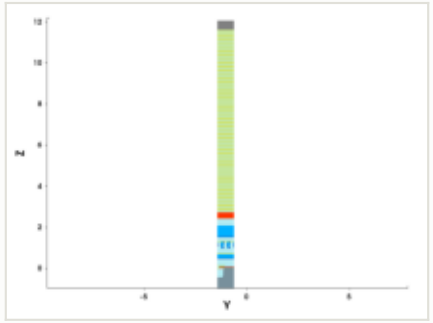


y cut at -1.035 µm

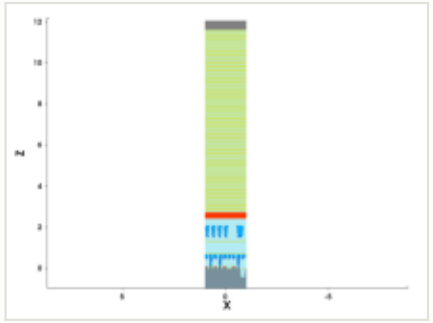


mask for this step

no mask for this step


steps by process area

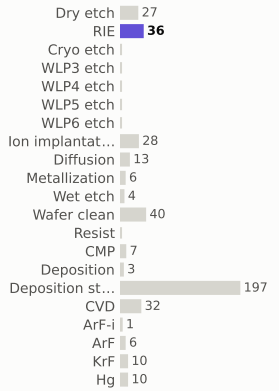

materials deposited (g)

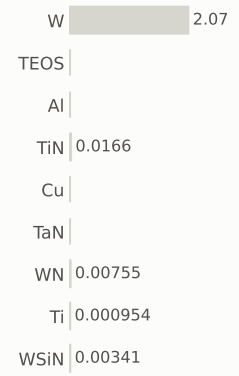

gases emitted (g)



Step #6290: Dry_etch


etch_strip · Dry_etch

0.801	441.2	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



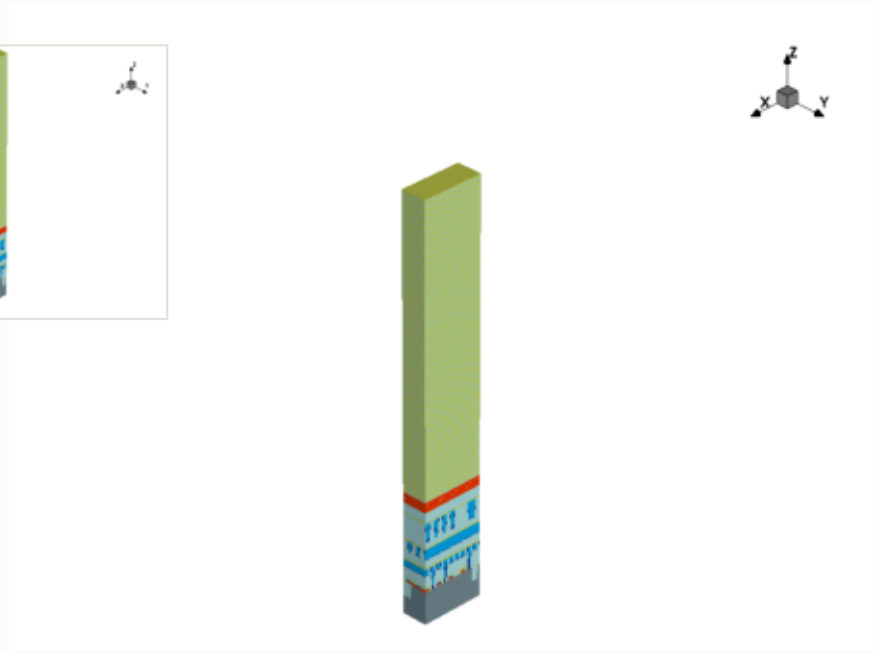


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

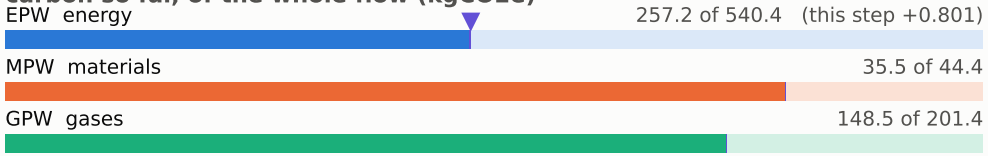


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

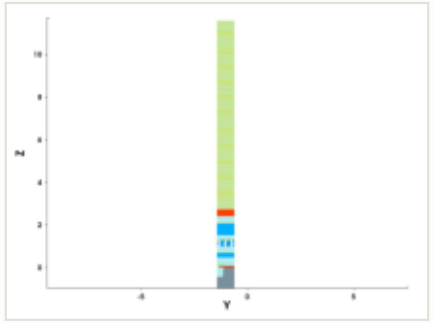


y cut at -1.035 µm

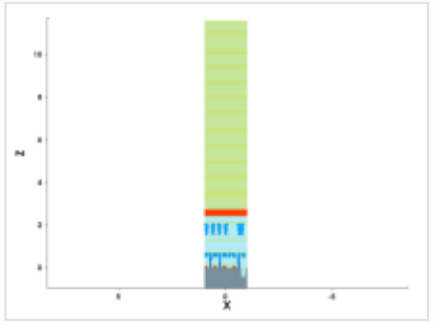


mask for this step

no mask for this step


steps by process area

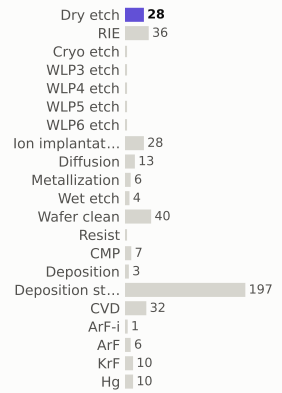

materials deposited (g)

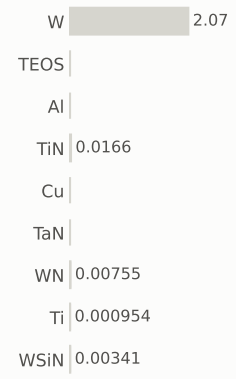

gases emitted (g)

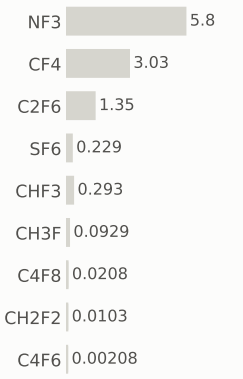

Step #6300: Wafer_clean


clean · Wafer_clean

0.169	441.3	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




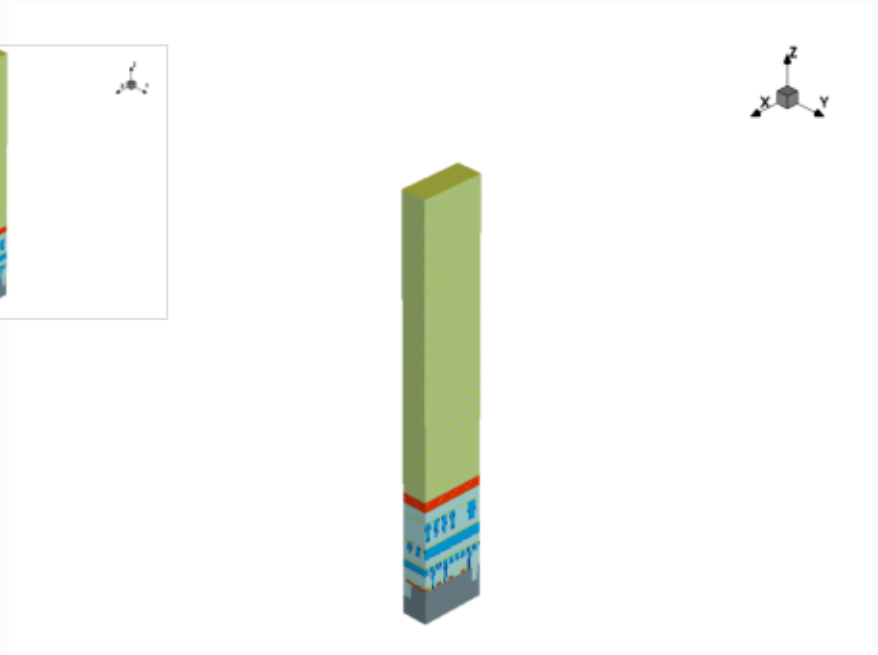

x cut at 0.000 µm

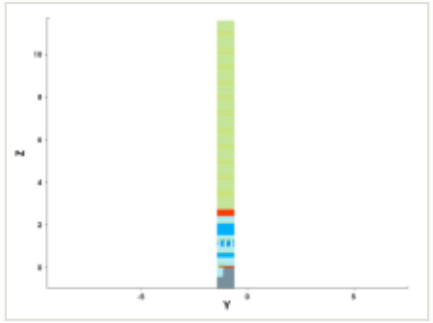

y cut at -1.035 µm

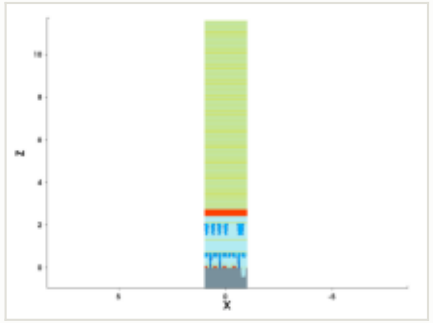

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

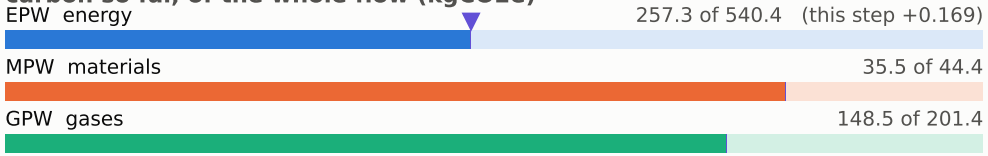

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

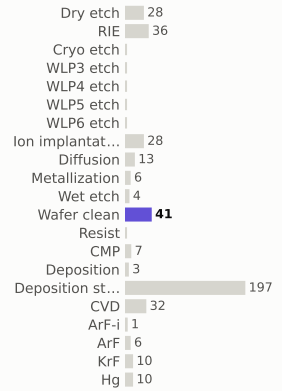

materials deposited (g)



gases emitted (g)

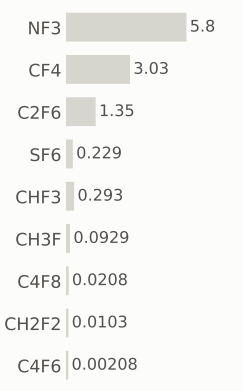

Step #6310: KrF


litho_patterning · KrF

0.199	441.5	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




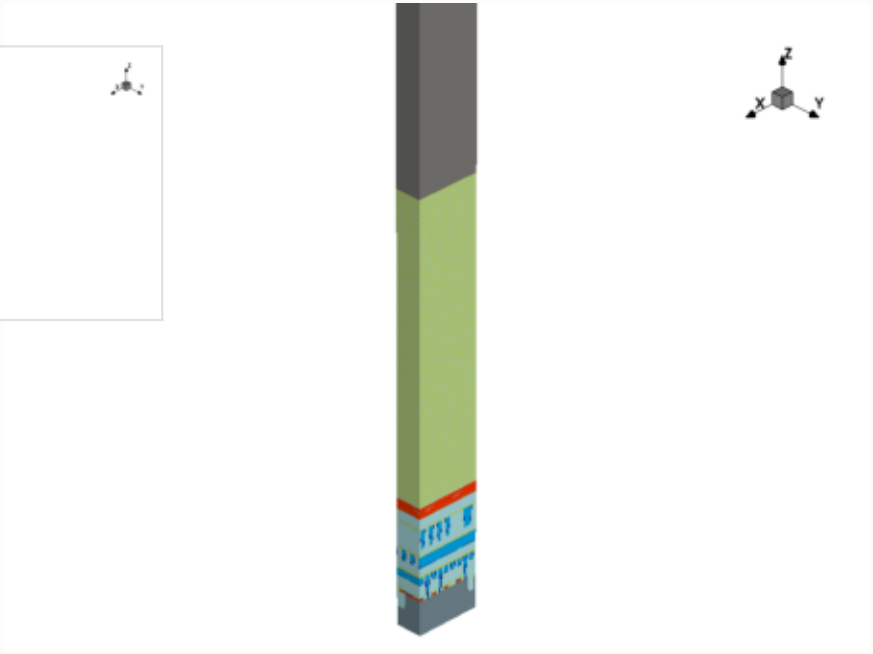

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

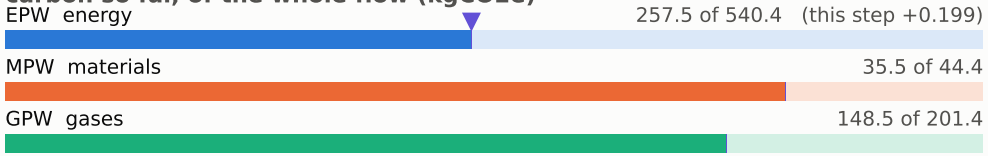


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

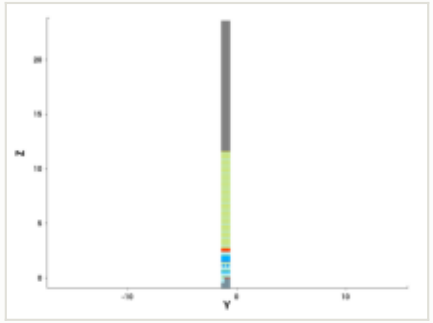


y cut at -1.035 µm

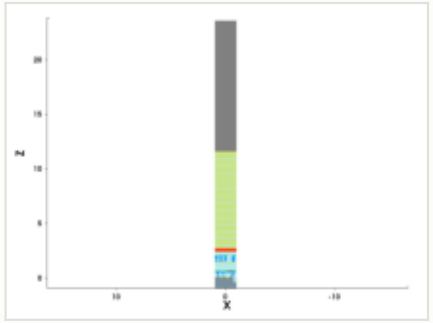

mask: layer 29:0, positive (OASIS)




steps by process area

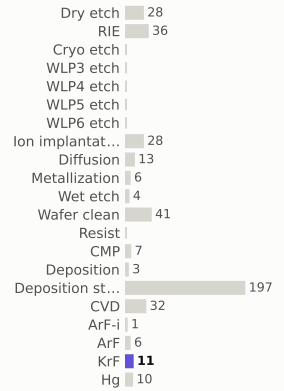

materials deposited (g)



gases emitted (g)

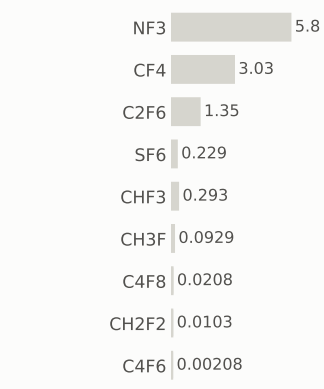

Step #6320: RIE


etch_anisotropic · RIE

1.04	442.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



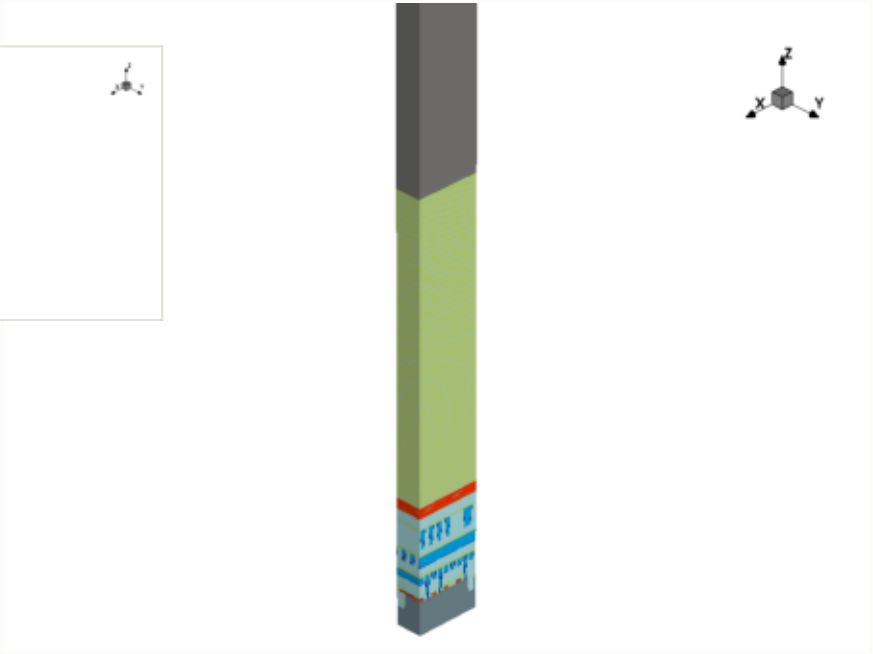


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

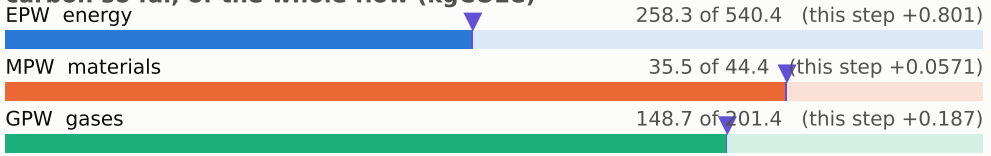


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

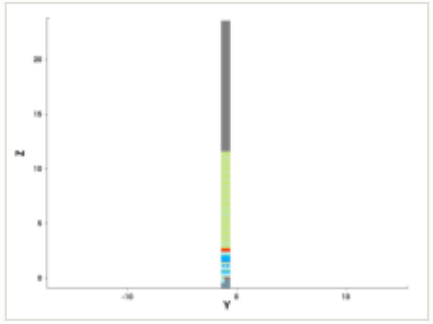


y cut at -1.035 µm

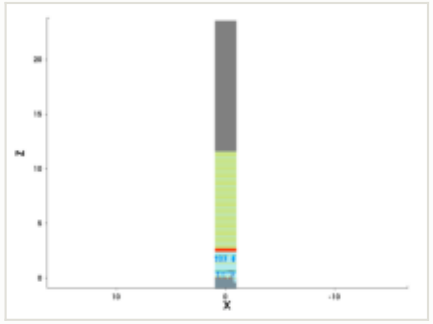


mask for this step

no mask for this step


steps by process area

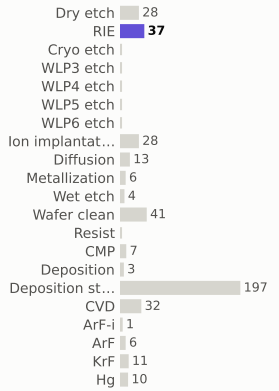

materials deposited (g)

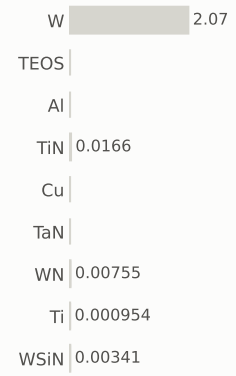

gases emitted (g)



Step #6330: RIE


etch_anisotropic · RIE

1.04	443.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



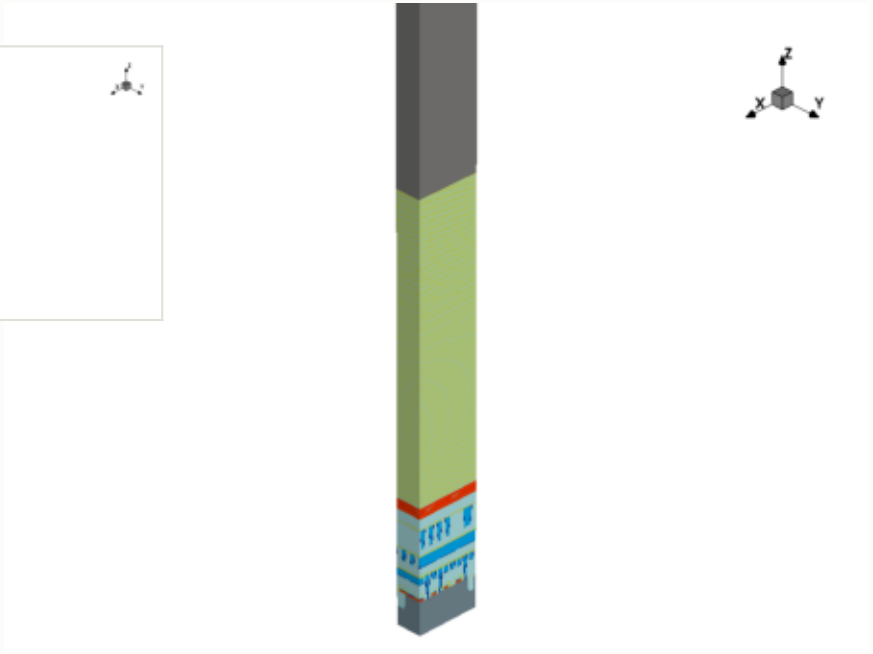


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

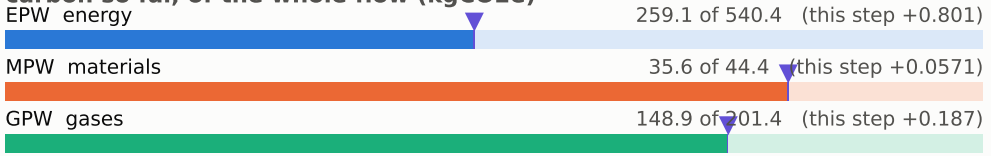


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

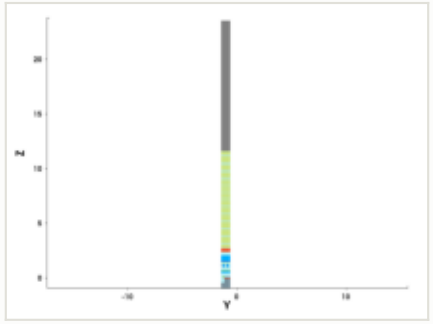


y cut at -1.035 µm

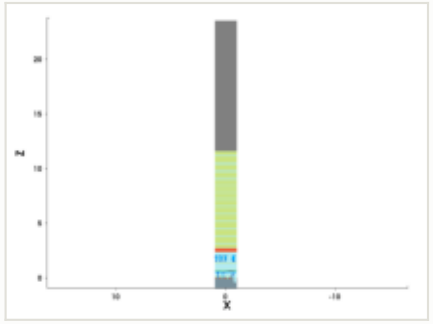


mask for this step

no mask for this step


steps by process area

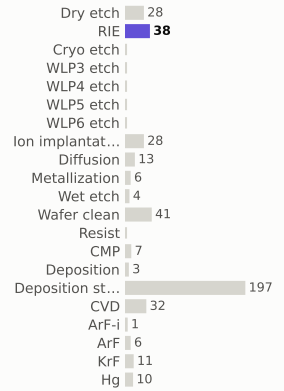

materials deposited (g)

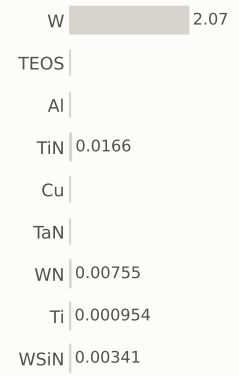

gases emitted (g)



Step #6340: RIE


etch_anisotropic · RIE

1.04	444.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



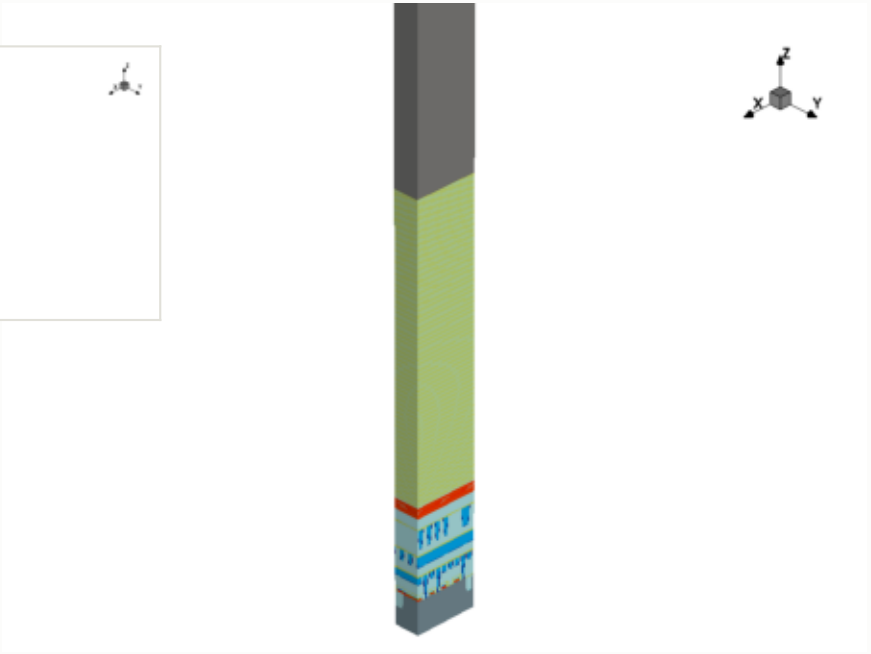


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

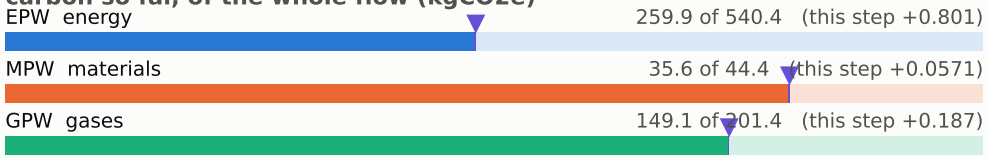


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

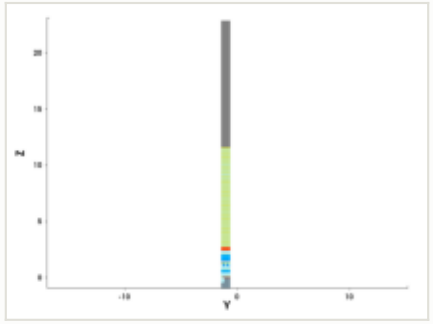


y cut at -1.035 µm

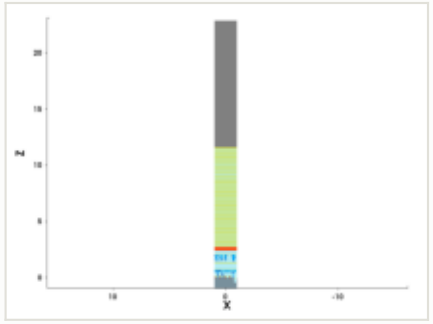

mask for this step

no mask for this step


steps by process area

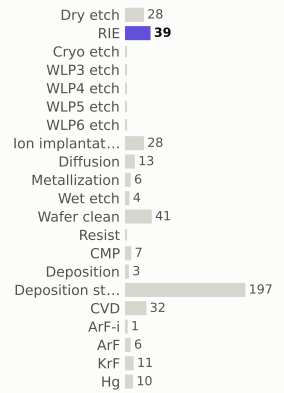

materials deposited (g)



gases emitted (g)



Step #6350: RIE


etch_anisotropic · RIE

1.04	445.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



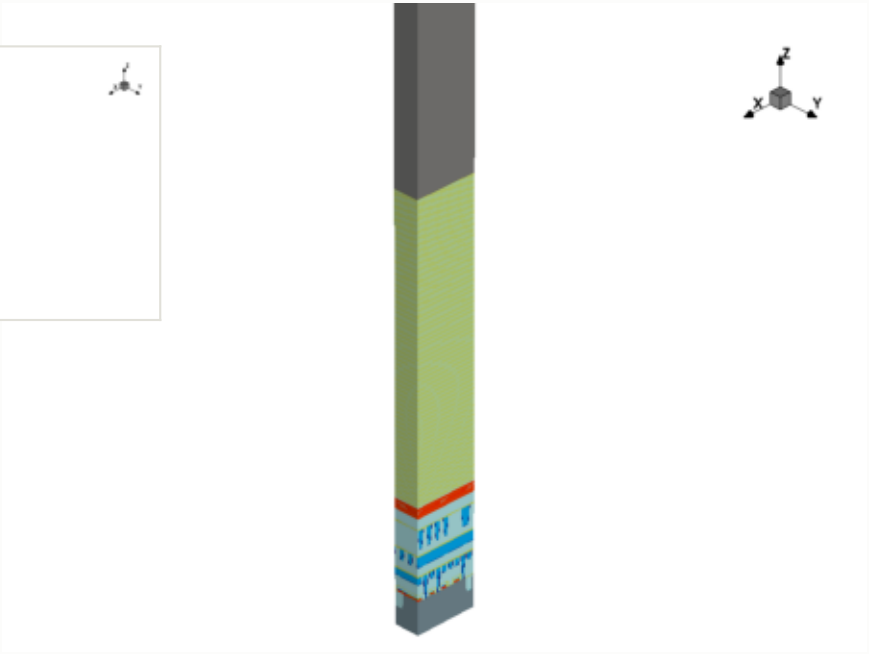


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

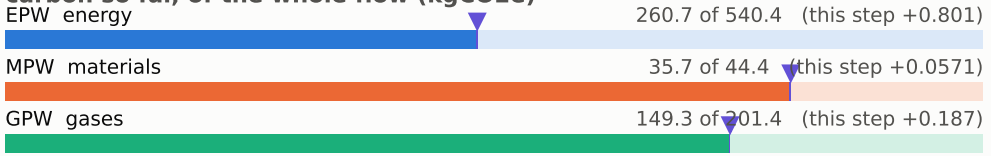


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

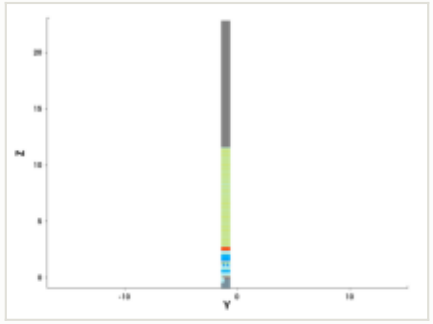


y cut at -1.035 µm

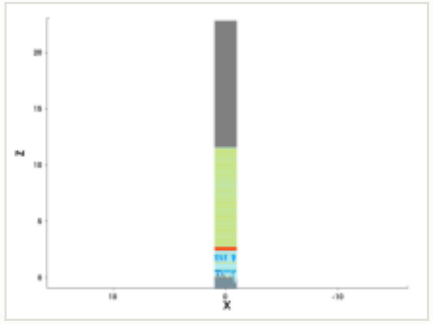

mask for this step

no mask for this step


steps by process area

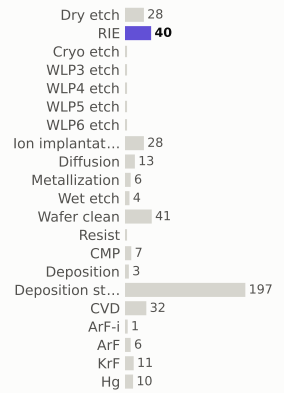

materials deposited (g)



gases emitted (g)

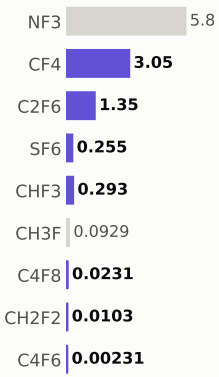

Step #6360: RIE


etch_anisotropic · RIE

1.04	446.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



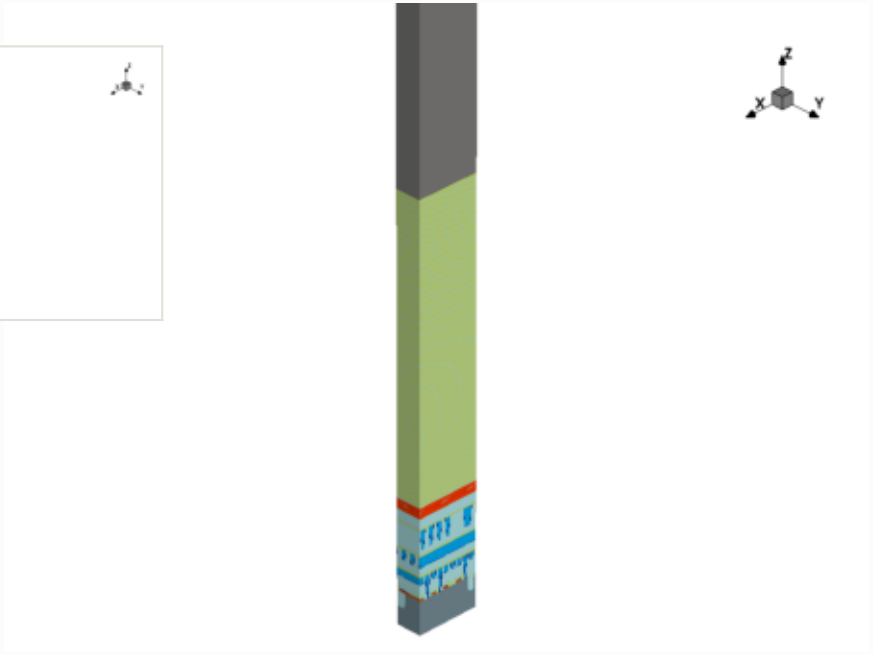


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

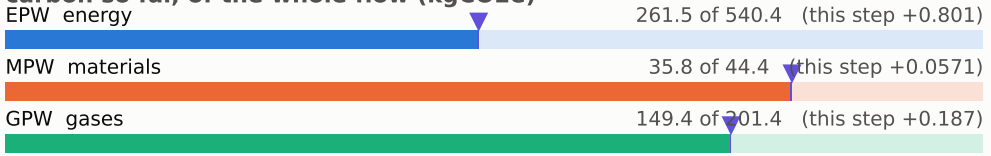


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

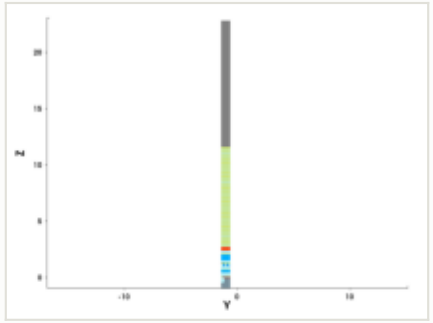


y cut at -1.035 µm

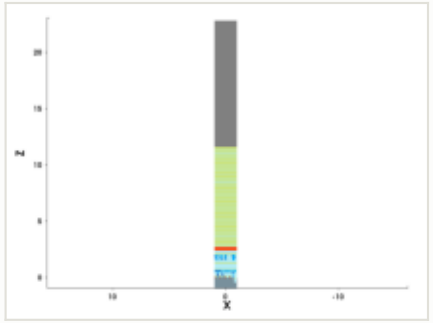

mask for this step

no mask for this step


steps by process area

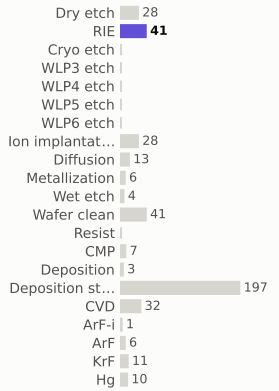

materials deposited (g)



gases emitted (g)



Step #6370: RIE


etch_anisotropic · RIE

1.04	447.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



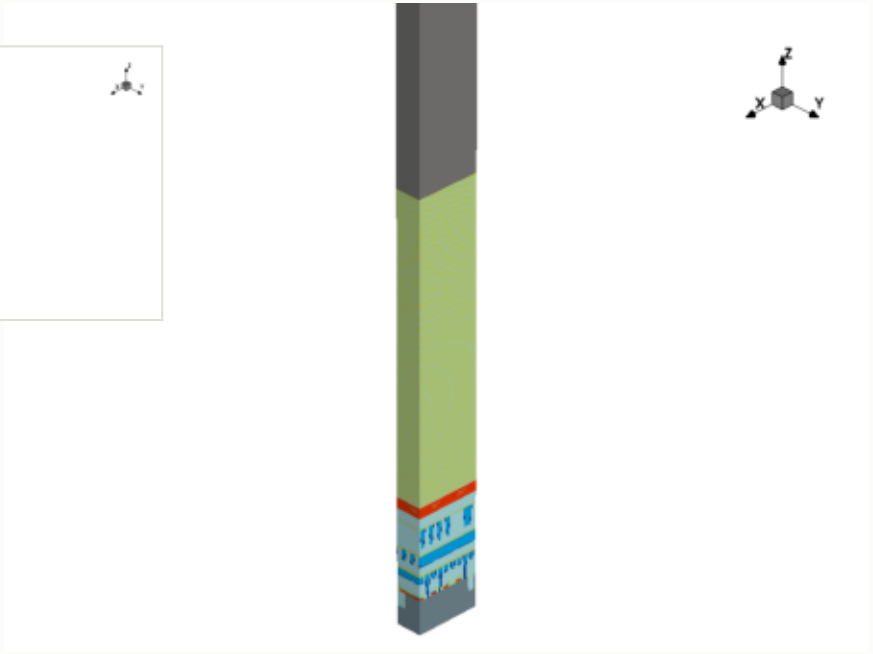


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

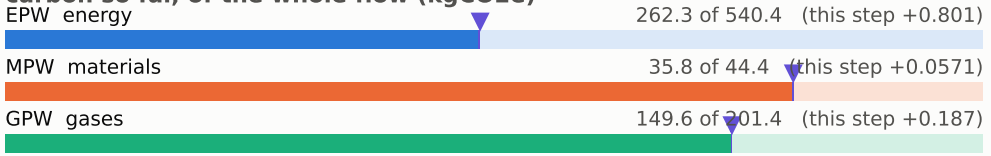


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

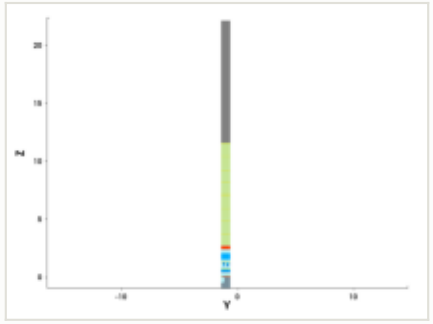


y cut at -1.035 µm

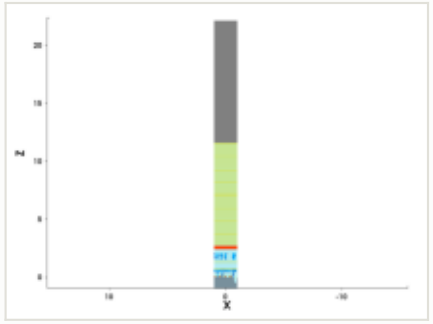

mask for this step

no mask for this step


steps by process area

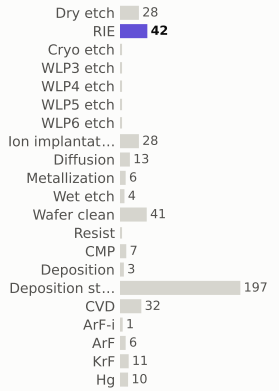

materials deposited (g)



gases emitted (g)



Step #6380: RIE


etch_anisotropic · RIE

1.04	448.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



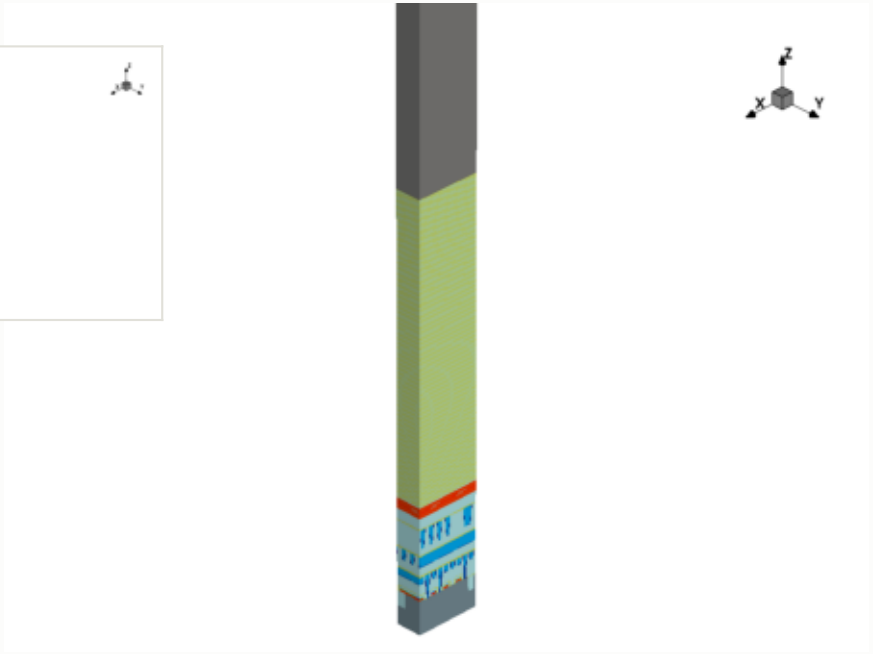


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

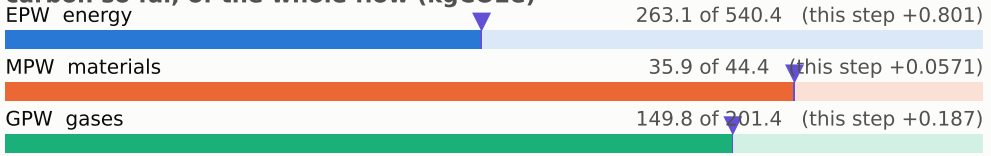


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

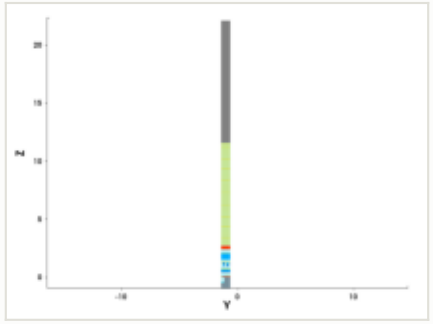


y cut at -1.035 µm

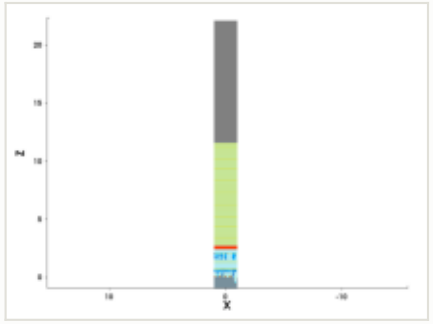

mask for this step

no mask for this step


steps by process area

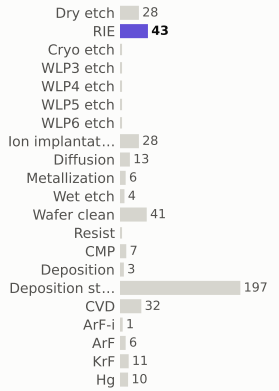

materials deposited (g)



gases emitted (g)



Step #6390: RIE


etch_anisotropic · RIE

1.04	449.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



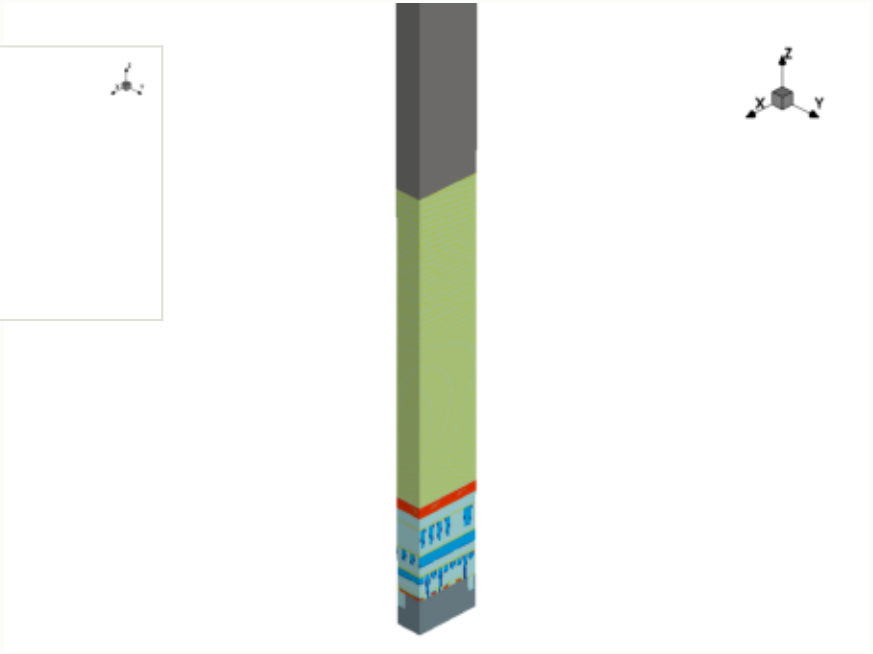


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

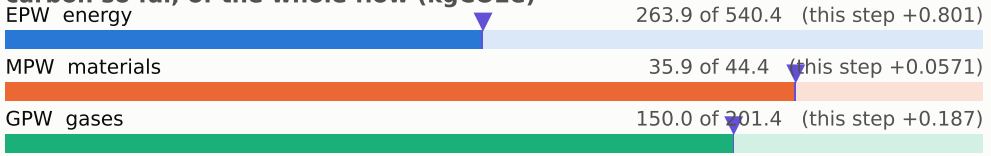


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

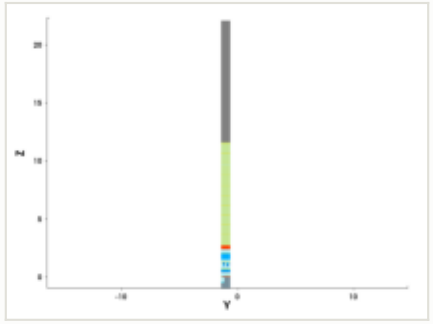


y cut at -1.035 µm

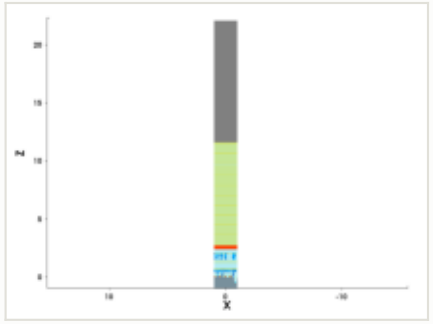

mask for this step

no mask for this step


steps by process area

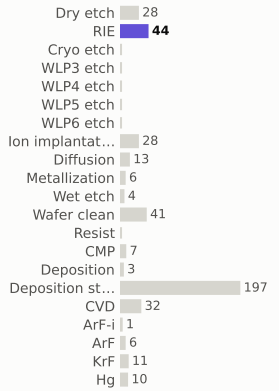

materials deposited (g)



gases emitted (g)



Step #6400: RIE


etch_anisotropic · RIE

1.04	450.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



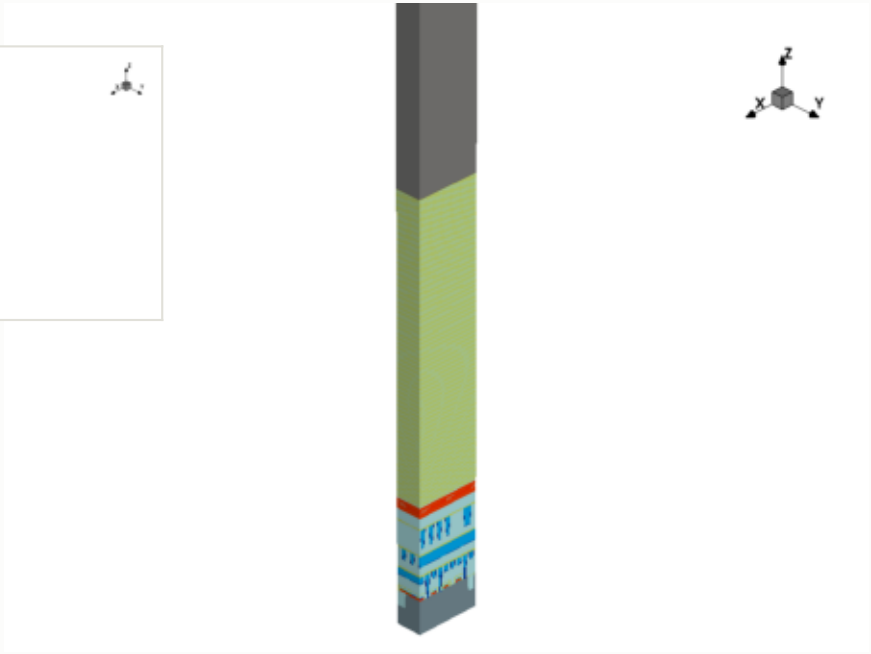


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

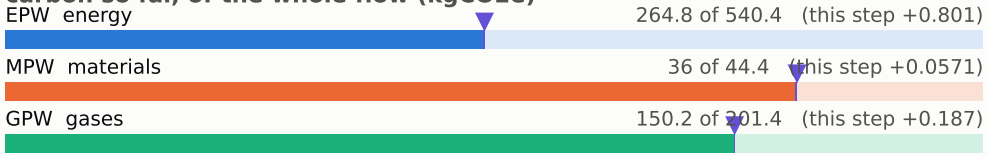


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

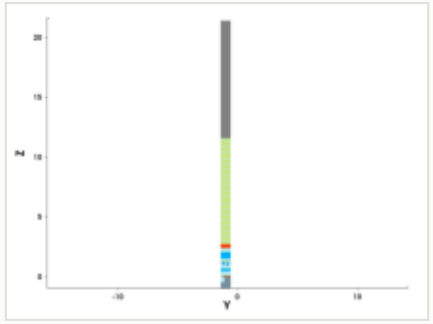


y cut at -1.035 µm

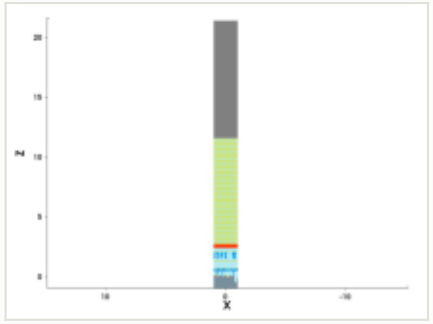


mask for this step

no mask for this step


steps by process area

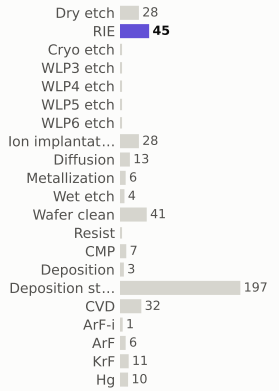

materials deposited (g)

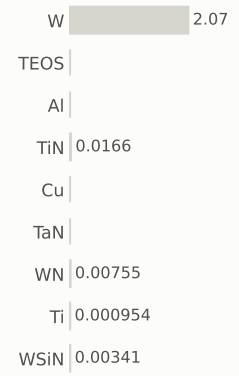

gases emitted (g)

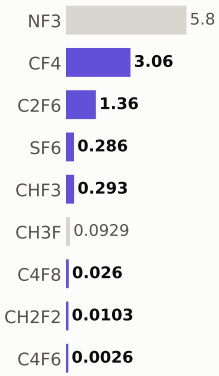

Step #6410: RIE


etch_anisotropic · RIE

1.04	452.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



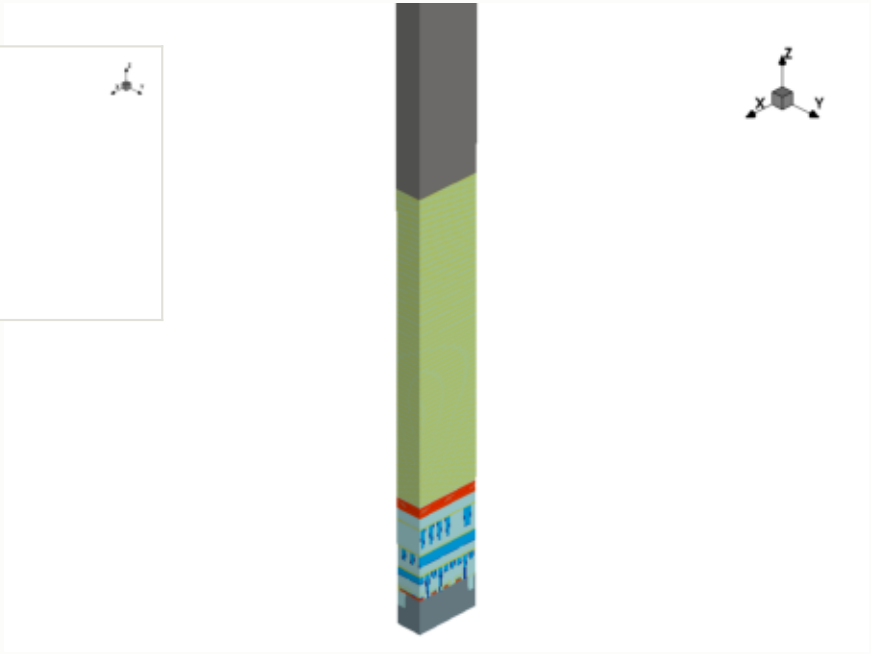


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

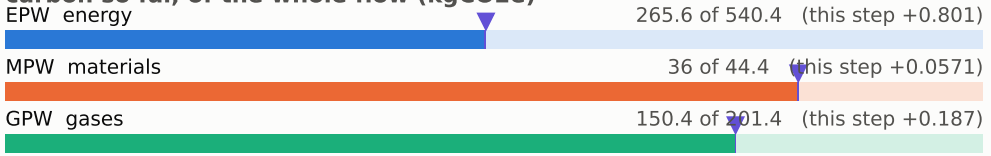


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

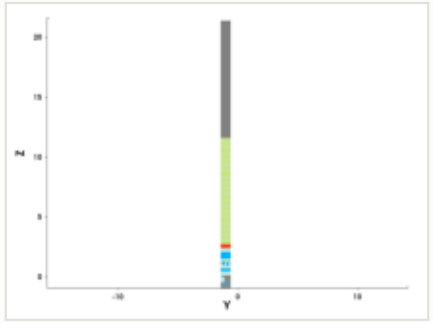


y cut at -1.035 µm

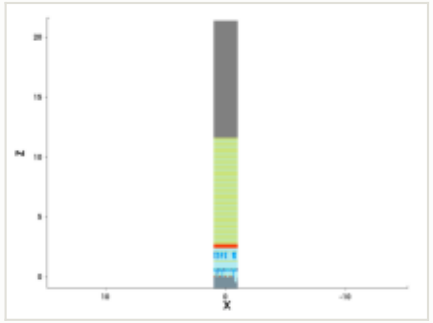

mask for this step

no mask for this step


steps by process area

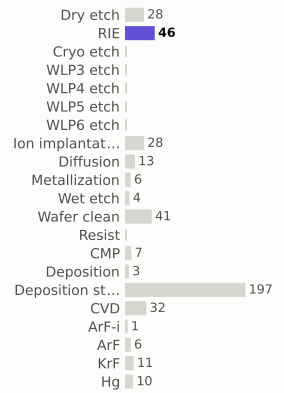

materials deposited (g)



gases emitted (g)

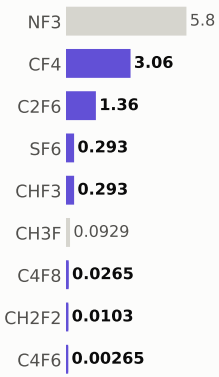

Step #6420: RIE


etch_anisotropic · RIE

1.04	453.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



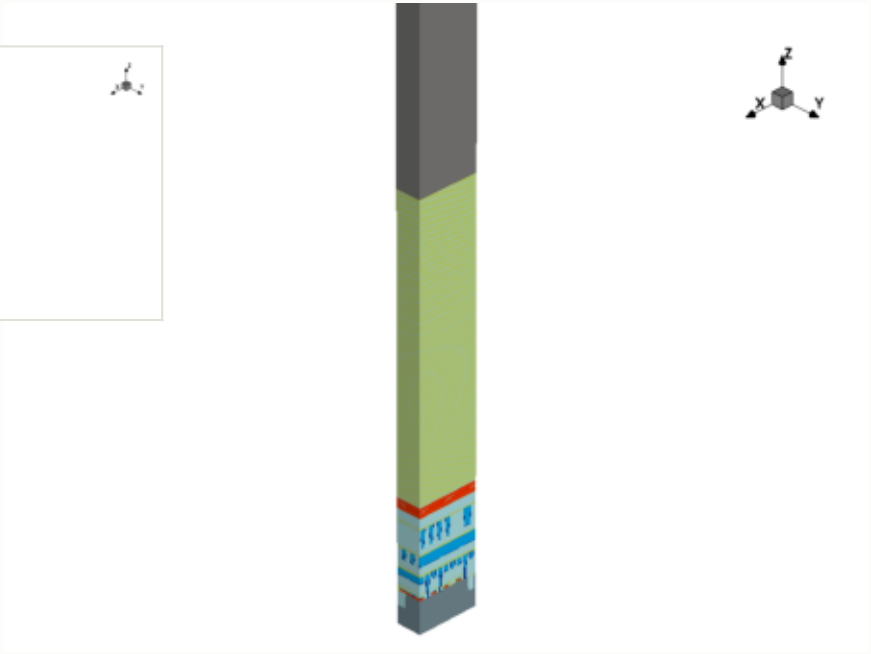


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

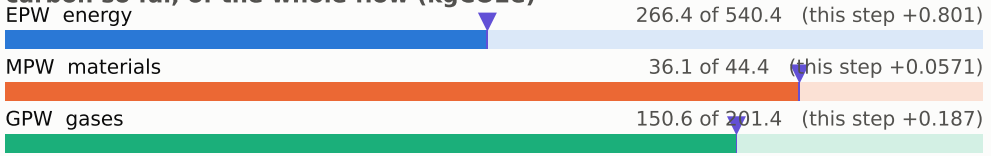


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

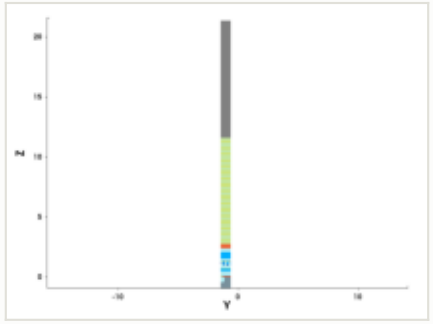


y cut at -1.035 µm

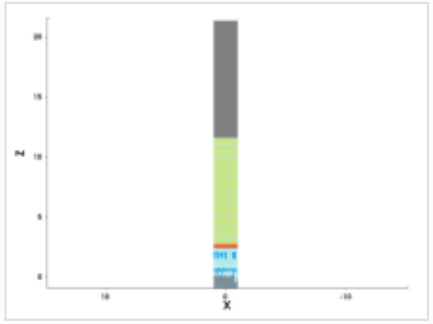

mask for this step

no mask for this step


steps by process area

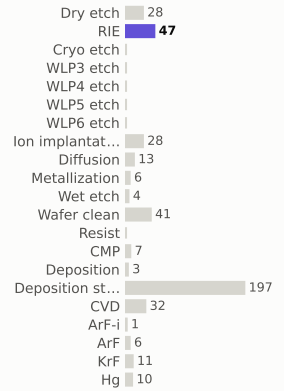

materials deposited (g)



gases emitted (g)

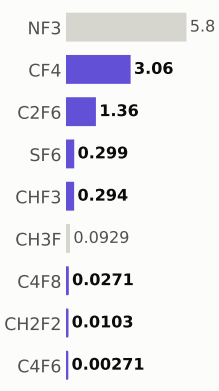

Step #6430: RIE


etch_anisotropic · RIE

1.04	454.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



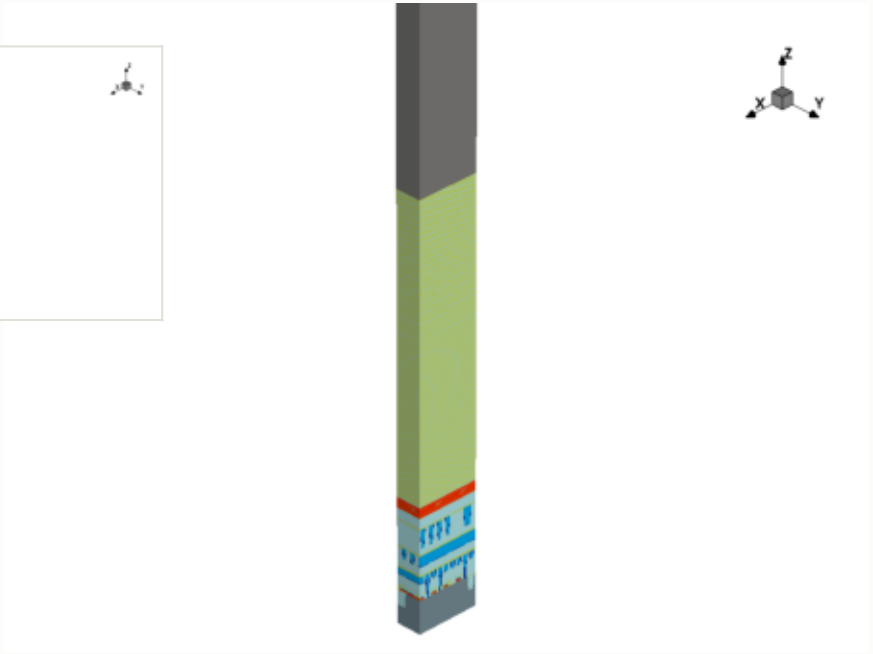


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

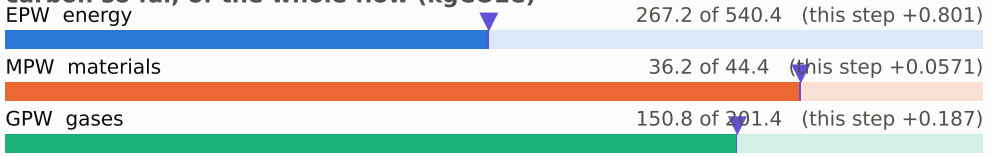


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

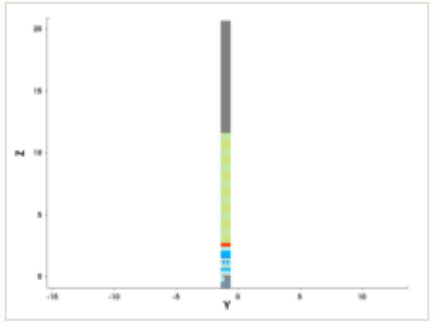


y cut at -1.035 µm

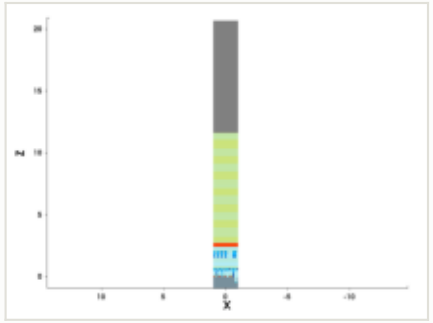

mask for this step

no mask for this step


steps by process area

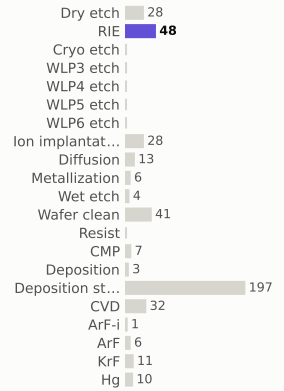

materials deposited (g)



gases emitted (g)

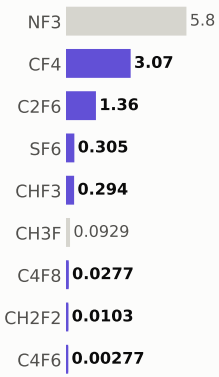

Step #6440: RIE


etch_anisotropic · RIE

1.04	455.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



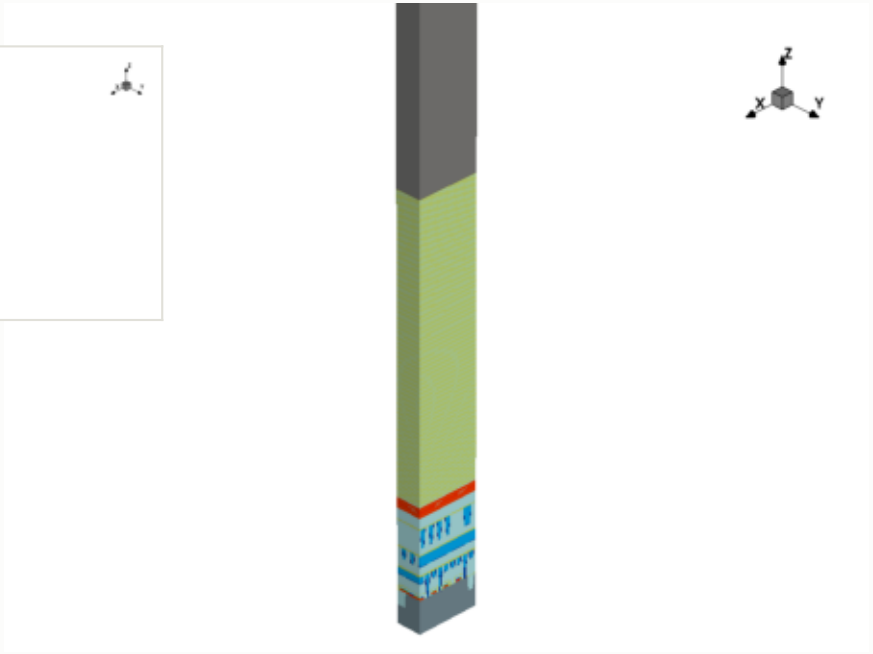


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

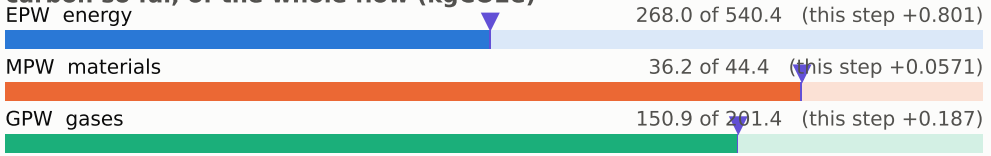


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

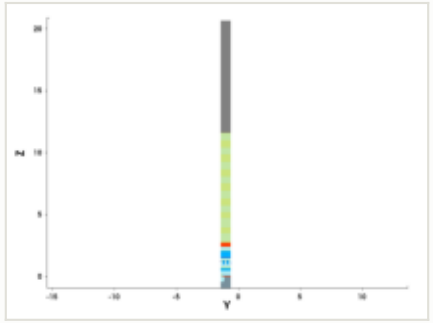


y cut at -1.035 µm

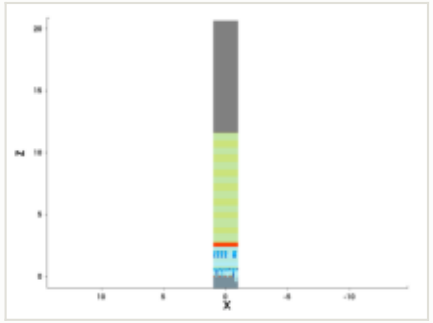

mask for this step

no mask for this step


steps by process area

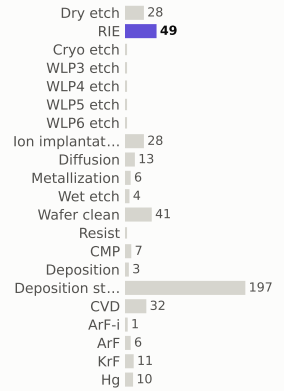

materials deposited (g)



gases emitted (g)

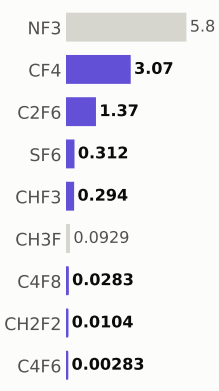

Step #6450: RIE


etch_anisotropic · RIE

1.04	456.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



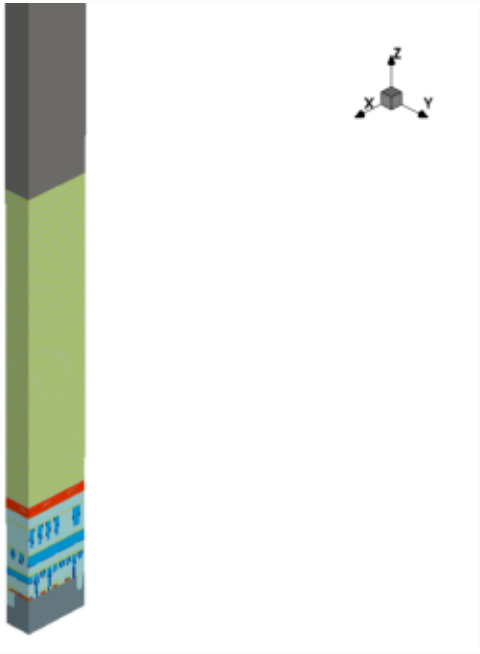


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

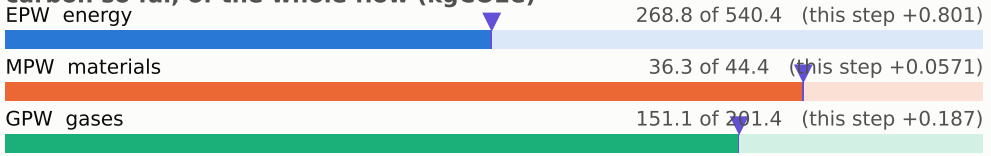


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

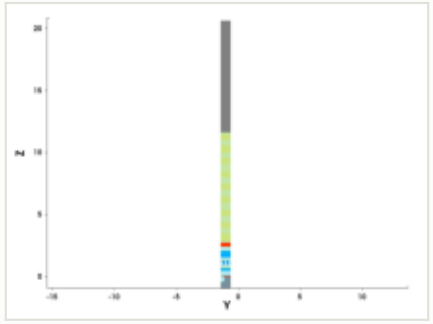


y cut at -1.035 µm

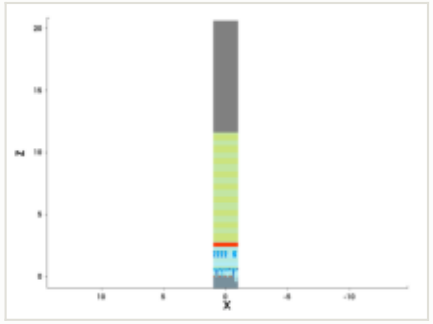


mask for this step

no mask for this step


steps by process area

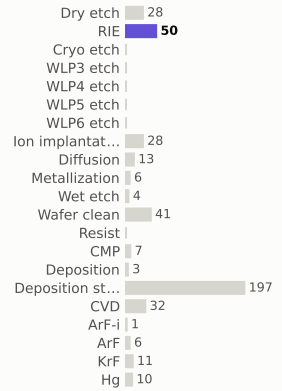

materials deposited (g)

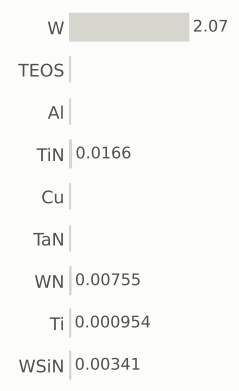

gases emitted (g)

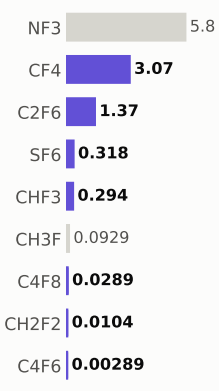

Step #6460: RIE


etch_anisotropic · RIE

1.04	457.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



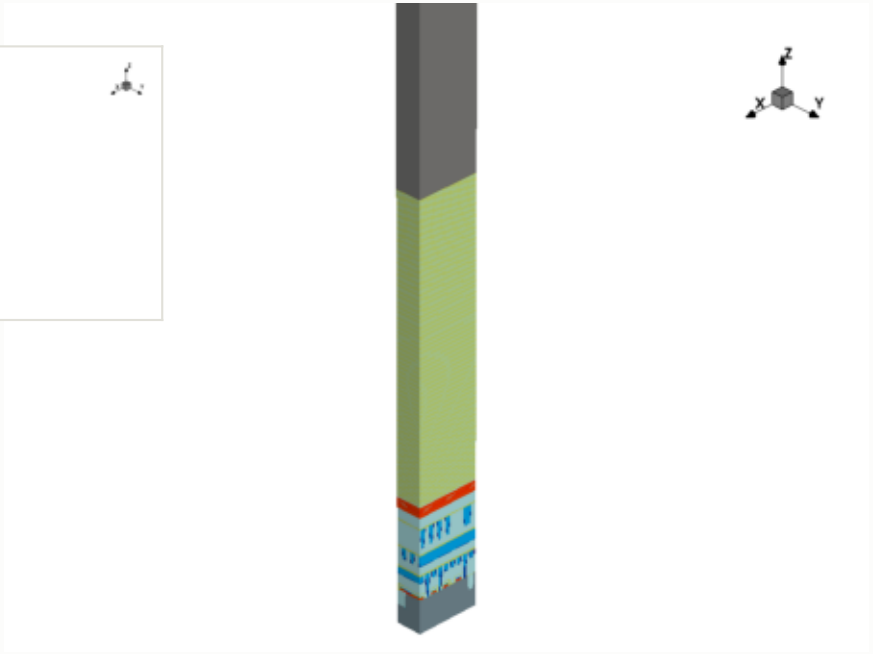


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

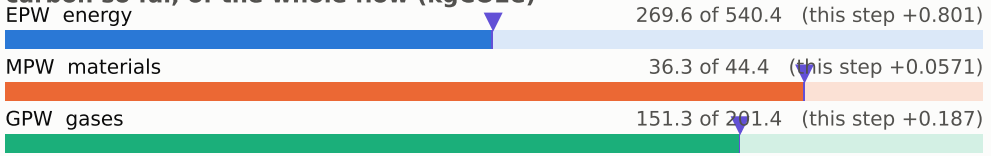


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

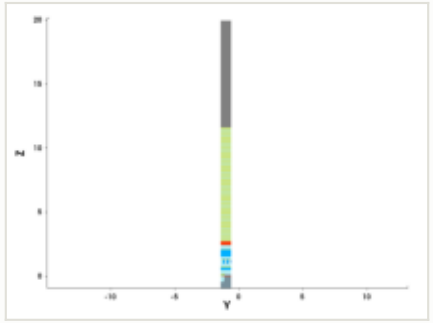


y cut at -1.035 µm

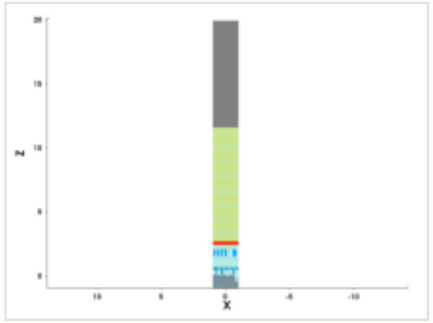

mask for this step

no mask for this step


steps by process area

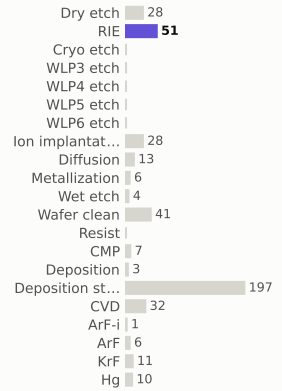

materials deposited (g)



gases emitted (g)

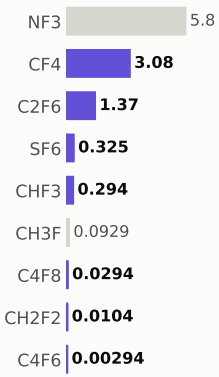


Step #6470: RIE


etch_anisotropic · RIE

1.04	458.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

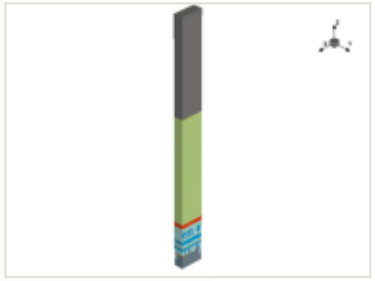

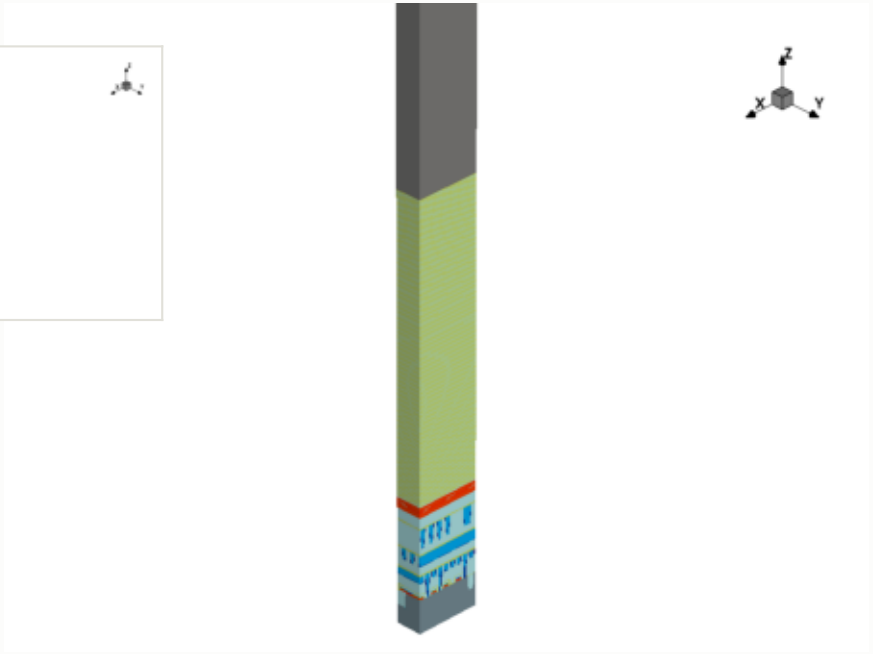


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

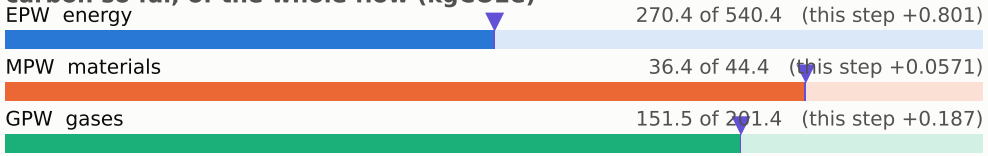


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

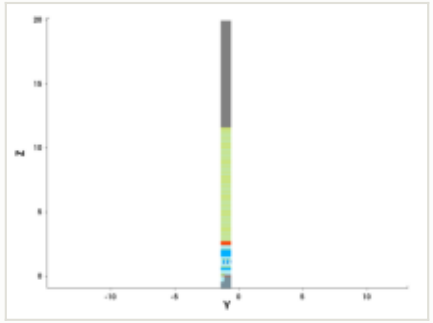


y cut at -1.035 µm

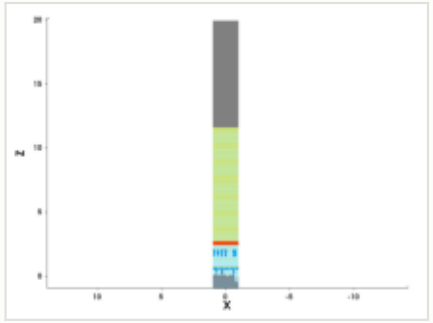


mask for this step

no mask for this step


steps by process area

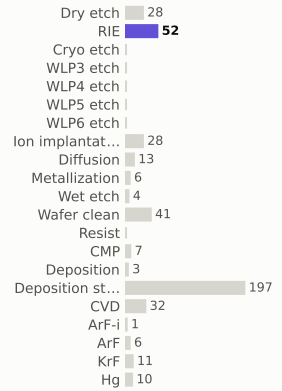

materials deposited (g)

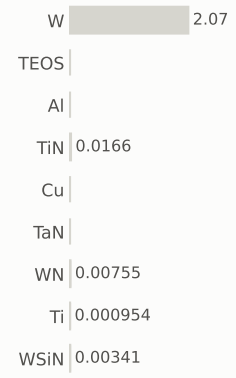

gases emitted (g)




Step #6480: RIE


etch_anisotropic · RIE

1.04	459.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

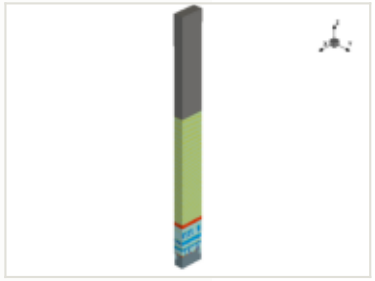

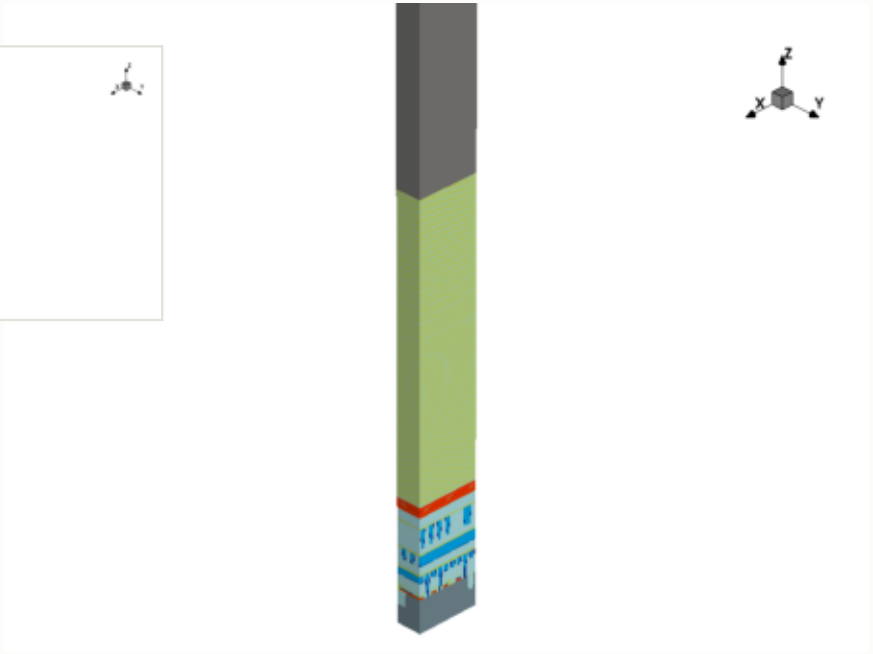


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

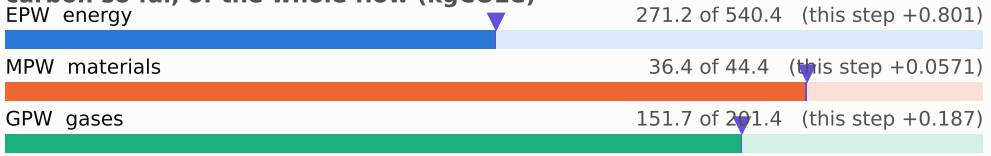


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

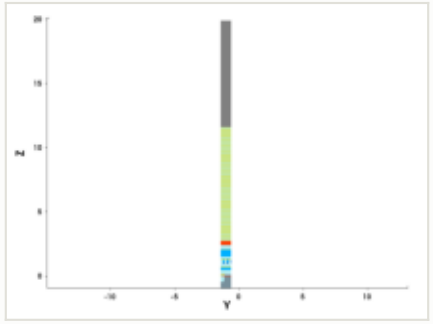


y cut at -1.035 µm

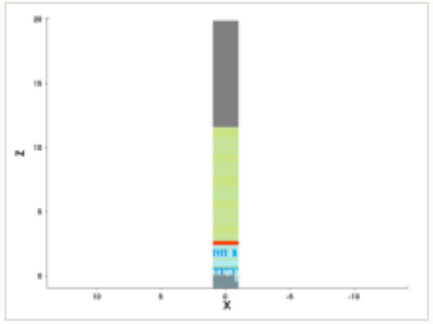


mask for this step

no mask for this step


steps by process area

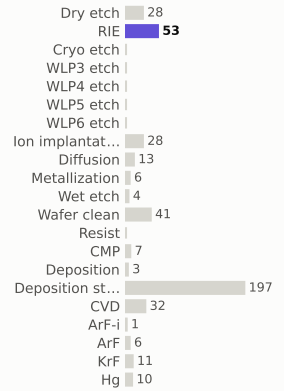

materials deposited (g)

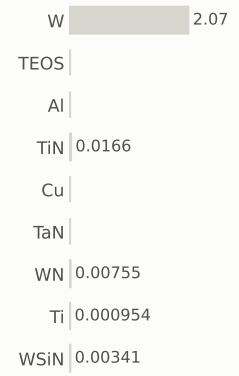

gases emitted (g)

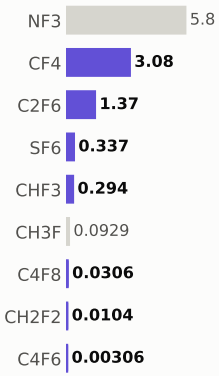


Step #6490: RIE


etch_anisotropic · RIE

1.04	460.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

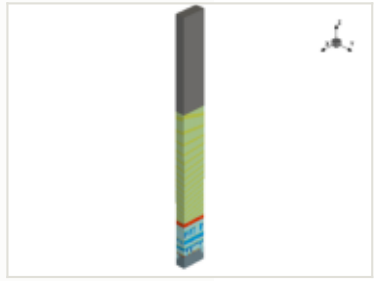

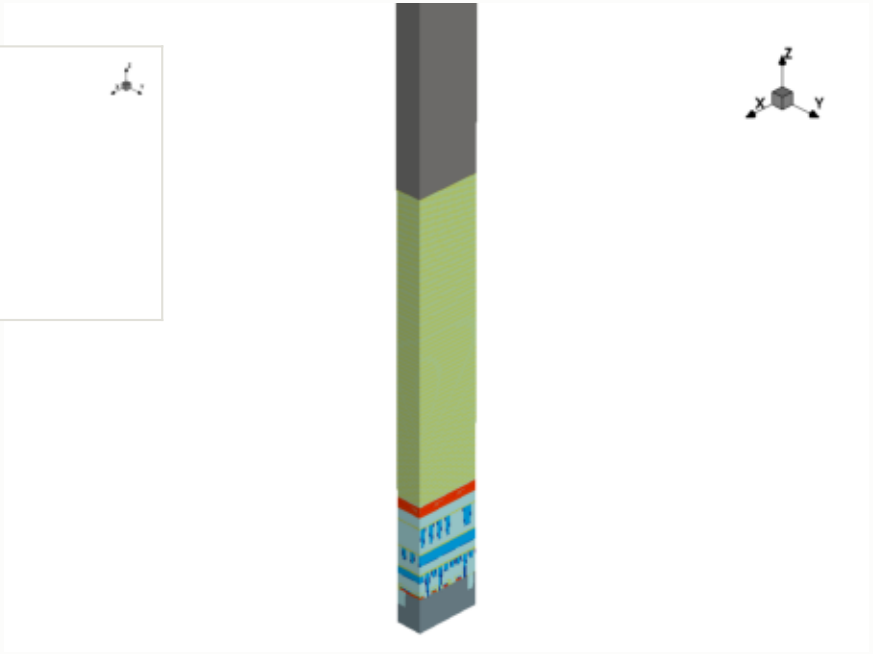


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

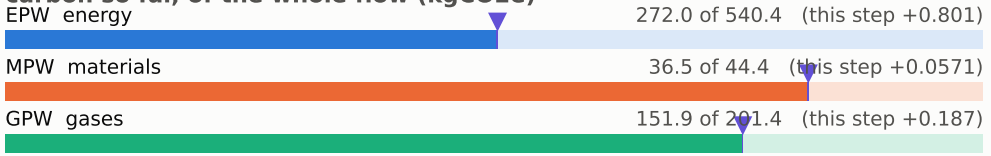


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

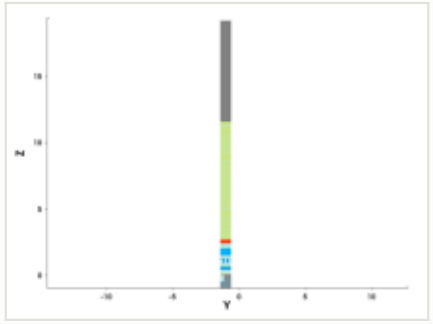


y cut at -1.035 µm

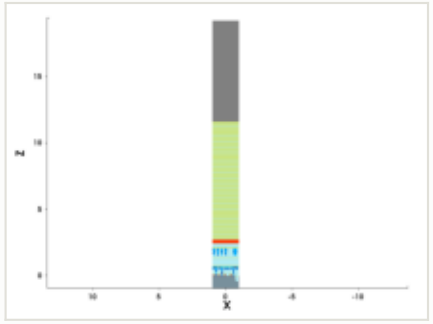


mask for this step

no mask for this step


steps by process area

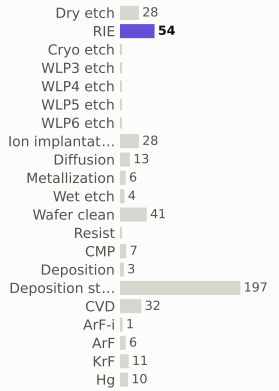

materials deposited (g)

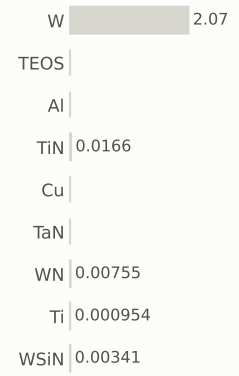

gases emitted (g)




Step #6500: RIE


etch_anisotropic · RIE

1.04	461.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

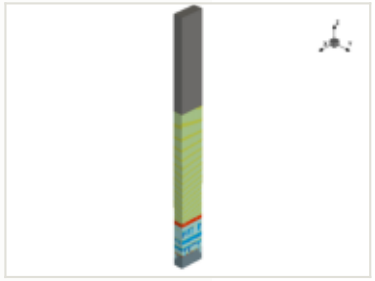

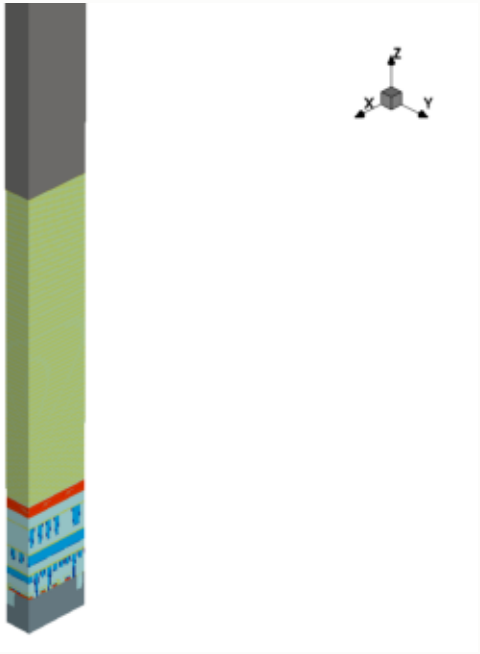


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

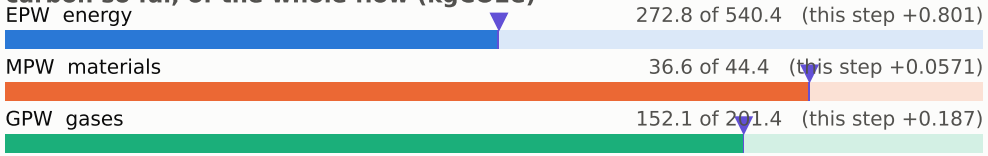


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

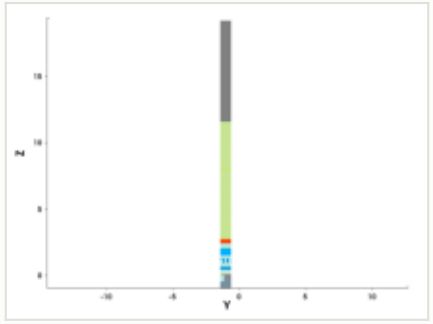


y cut at -1.035 µm

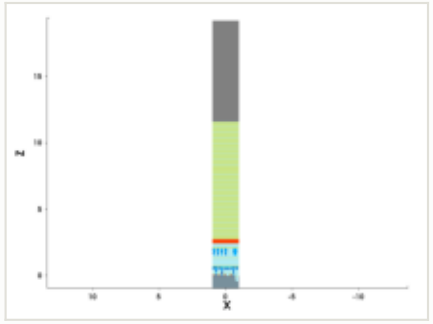


mask for this step

no mask for this step


steps by process area

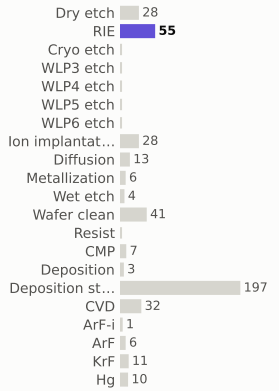

materials deposited (g)

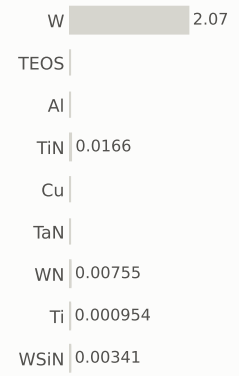

gases emitted (g)




Step #6510: RIE


etch_anisotropic · RIE

1.04	462.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

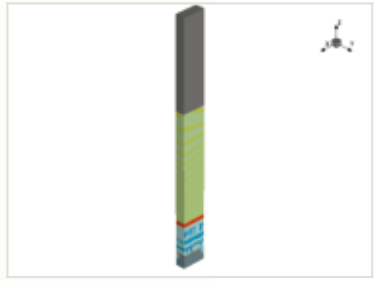

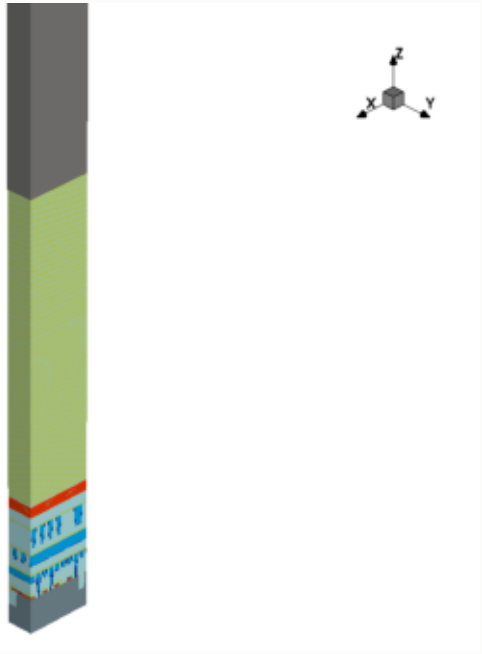


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

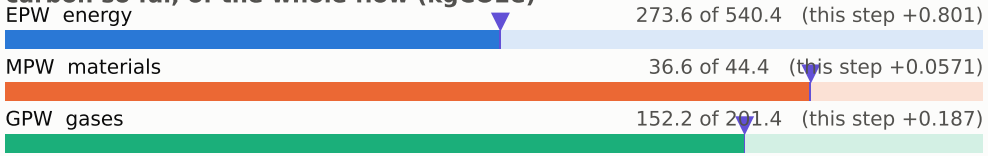


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

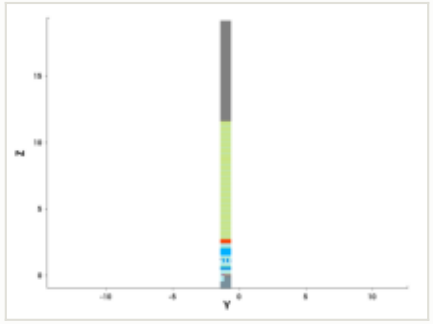


y cut at -1.035 µm

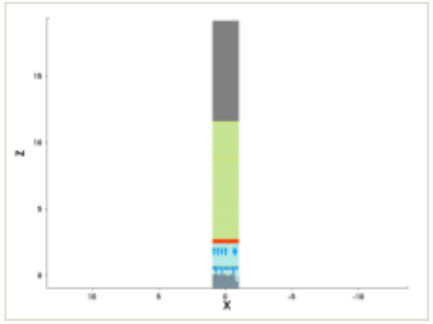


mask for this step

no mask for this step


steps by process area

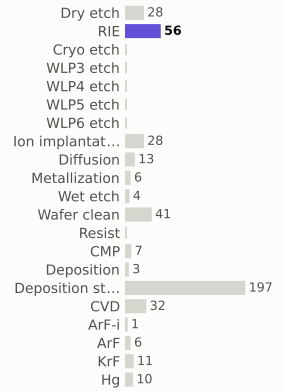

materials deposited (g)

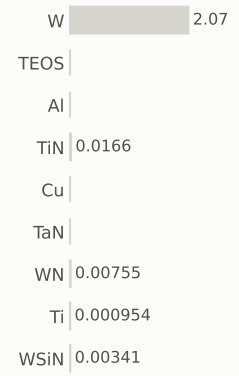

gases emitted (g)

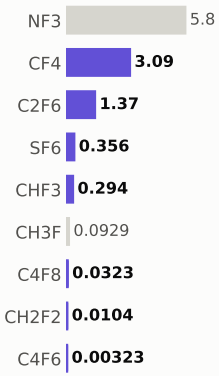


Step #6520: RIE


etch_anisotropic · RIE

1.04	463.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

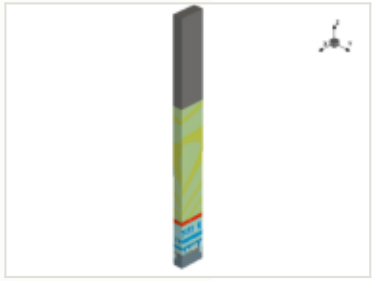

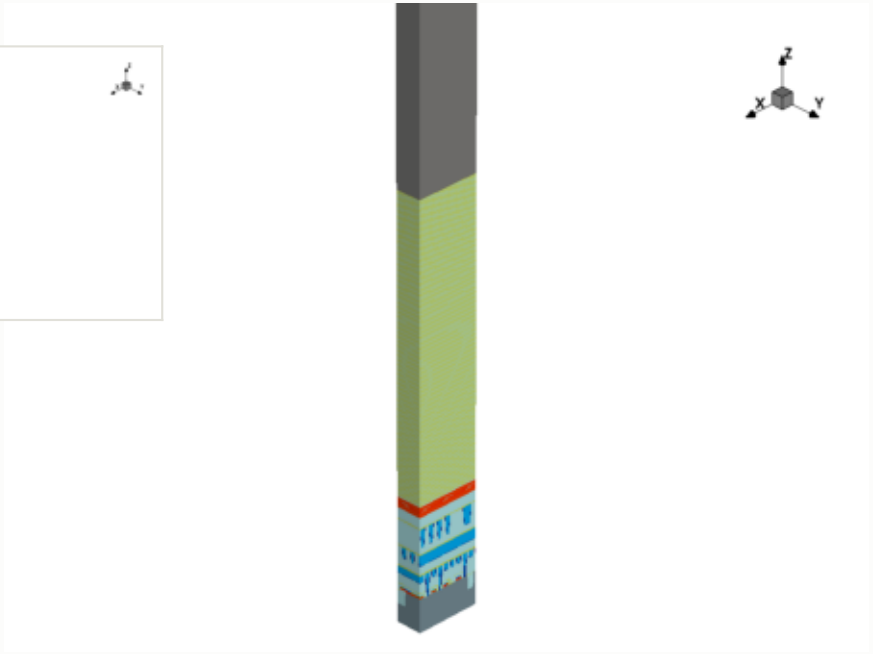


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

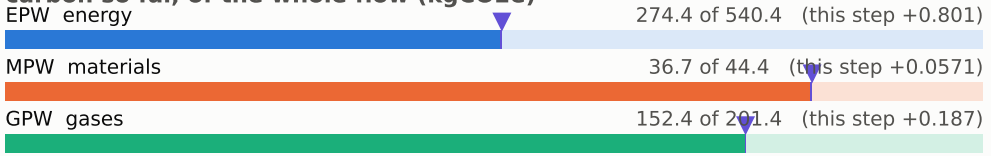


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

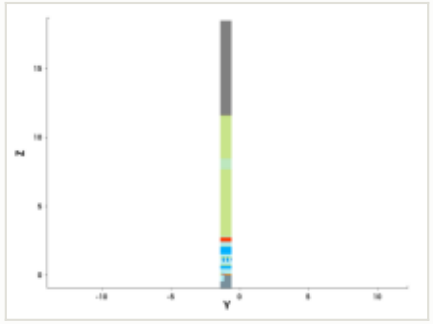


y cut at -1.035 µm

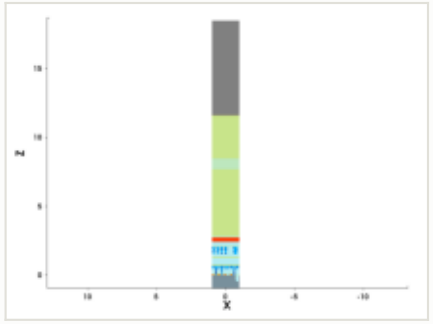


mask for this step

no mask for this step


steps by process area

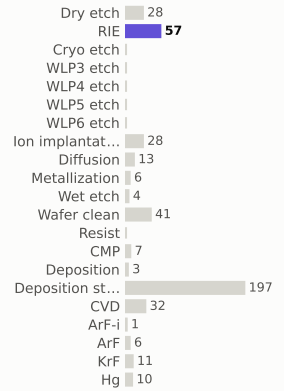

materials deposited (g)

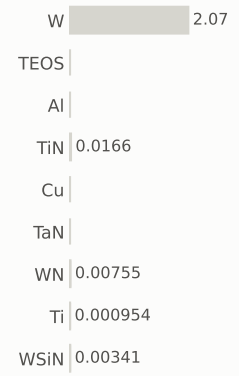

gases emitted (g)

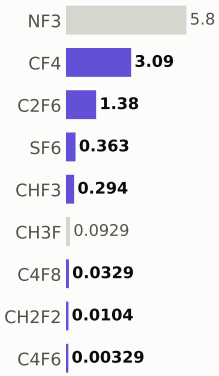


Step #6530: RIE


etch_anisotropic · RIE

1.04	464.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

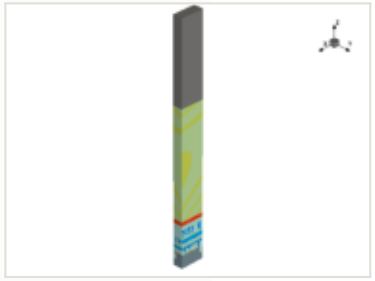

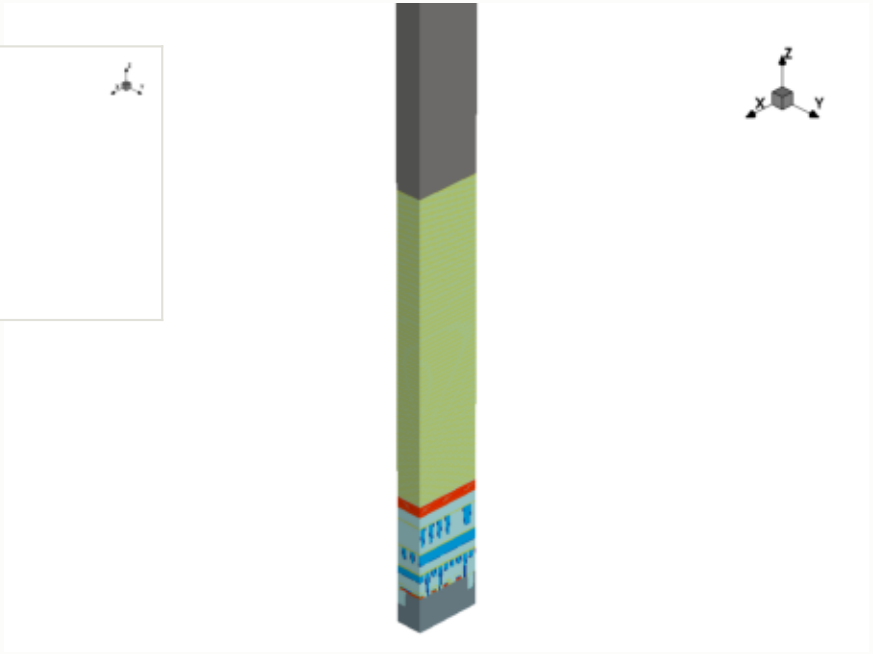


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

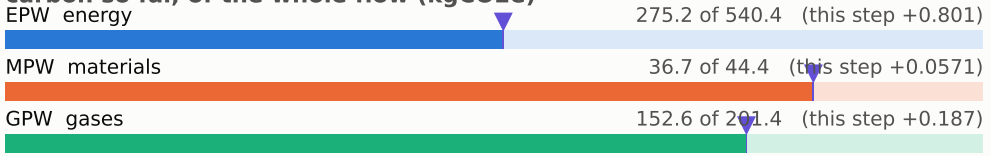


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

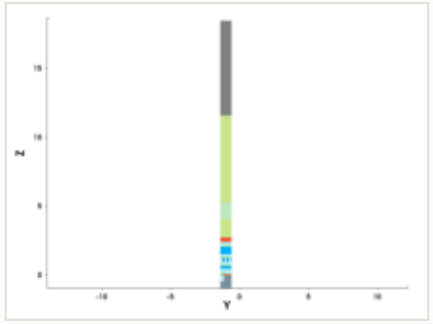


y cut at -1.035 µm

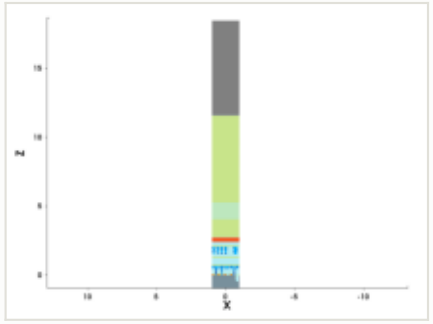


mask for this step

no mask for this step


steps by process area

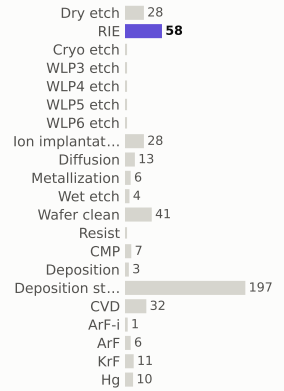

materials deposited (g)

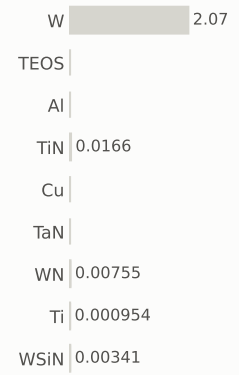

gases emitted (g)

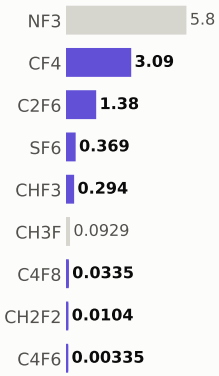


Step #6540: RIE


etch_anisotropic · RIE

1.04	465.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

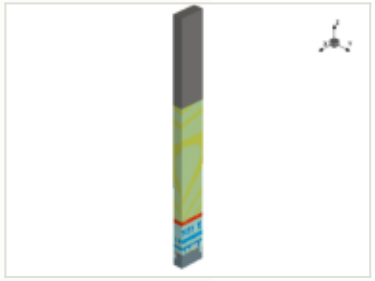

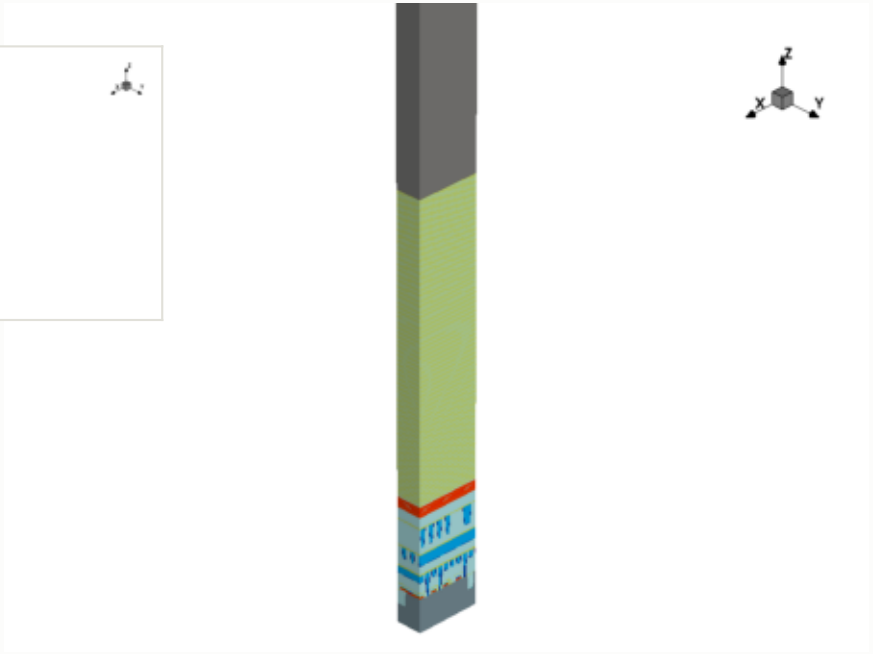


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

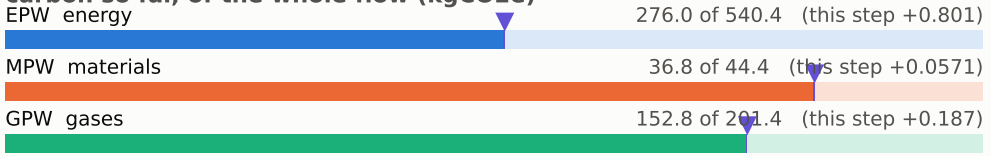


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

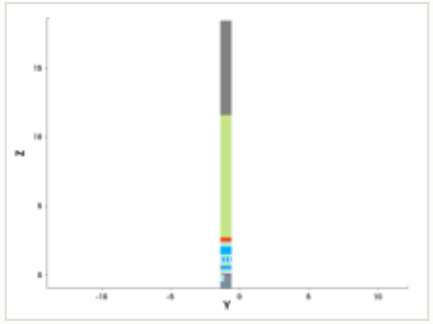


y cut at -1.035 µm

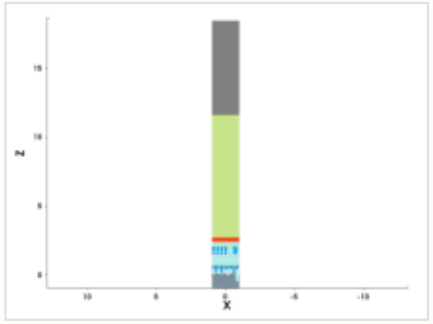


mask for this step

no mask for this step


steps by process area

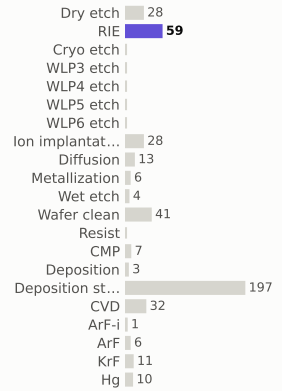

materials deposited (g)

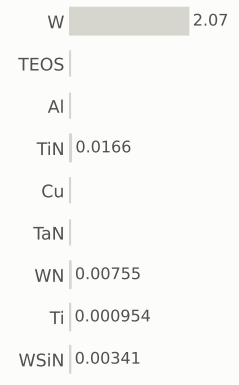

gases emitted (g)




Step #6550: RIE


etch_anisotropic · RIE

1.04	466.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

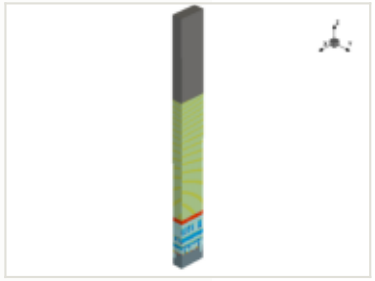

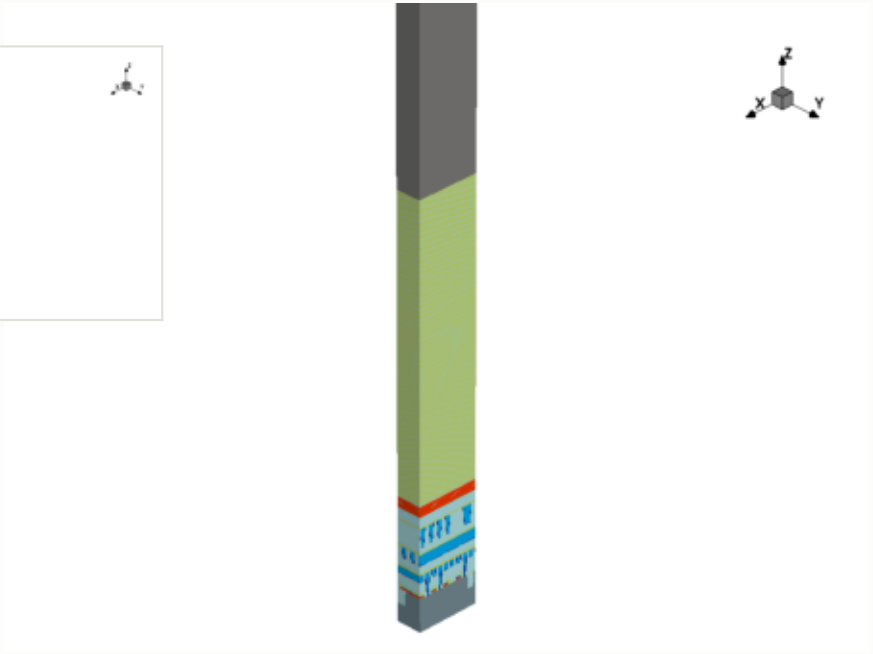


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

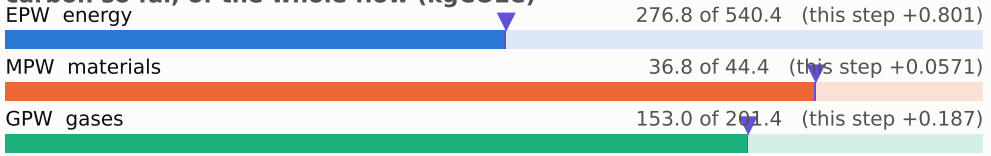


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

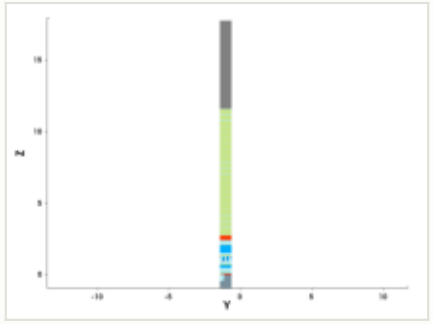


y cut at -1.035 µm

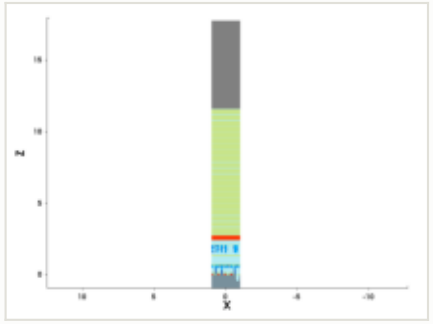


mask for this step

no mask for this step


steps by process area

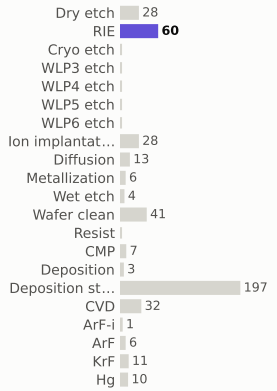

materials deposited (g)

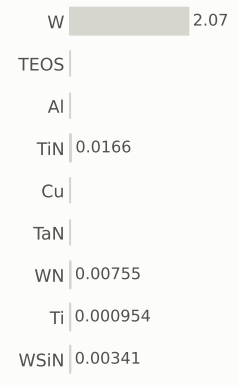

gases emitted (g)



Step #6560: RIE


etch_anisotropic · RIE

1.04	467.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



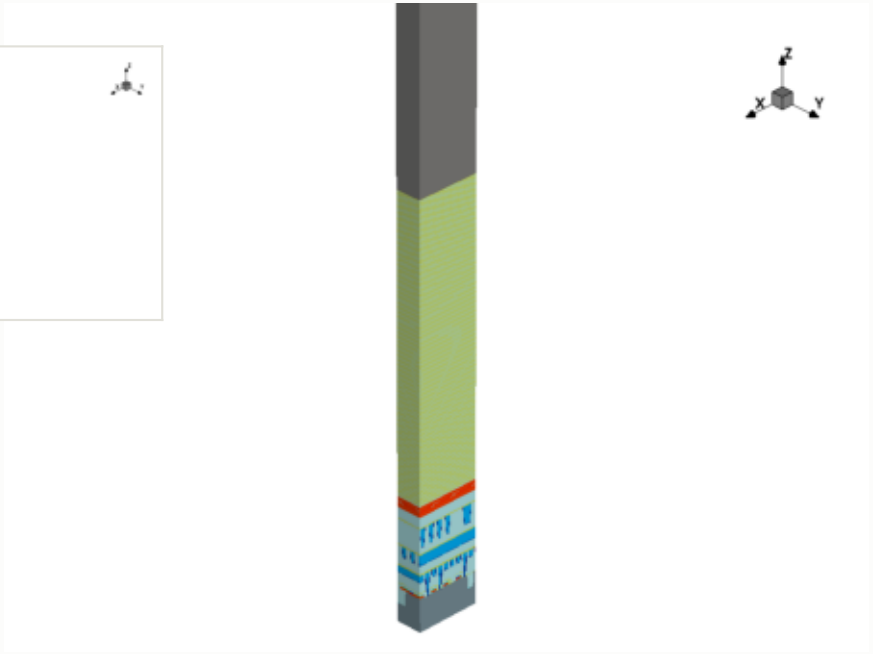


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

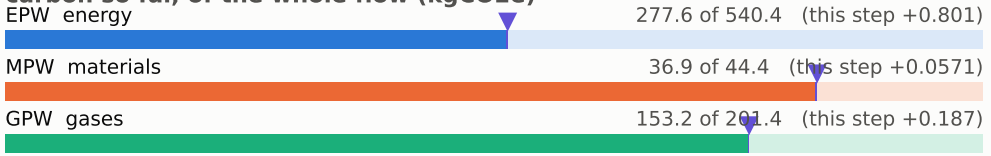


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

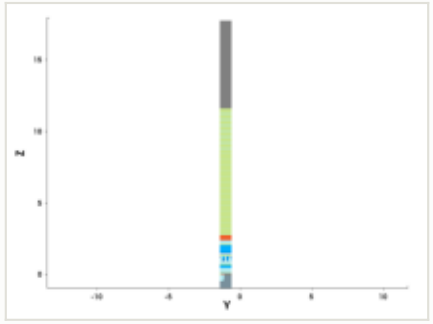


y cut at -1.035 µm

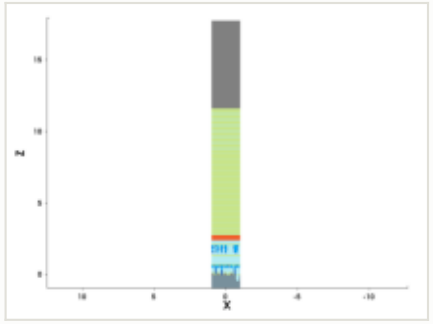

mask for this step

no mask for this step


steps by process area

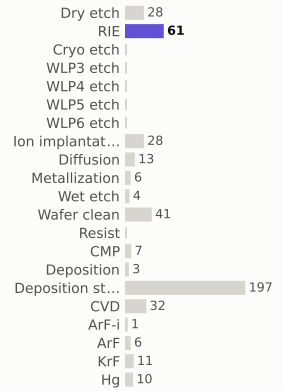

materials deposited (g)



gases emitted (g)




Step #6570: RIE


etch_anisotropic · RIE

1.04	468.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

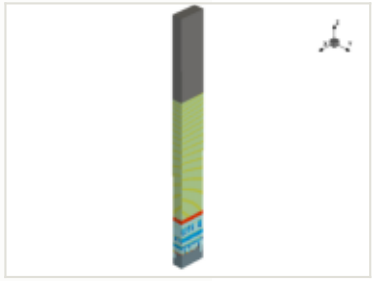

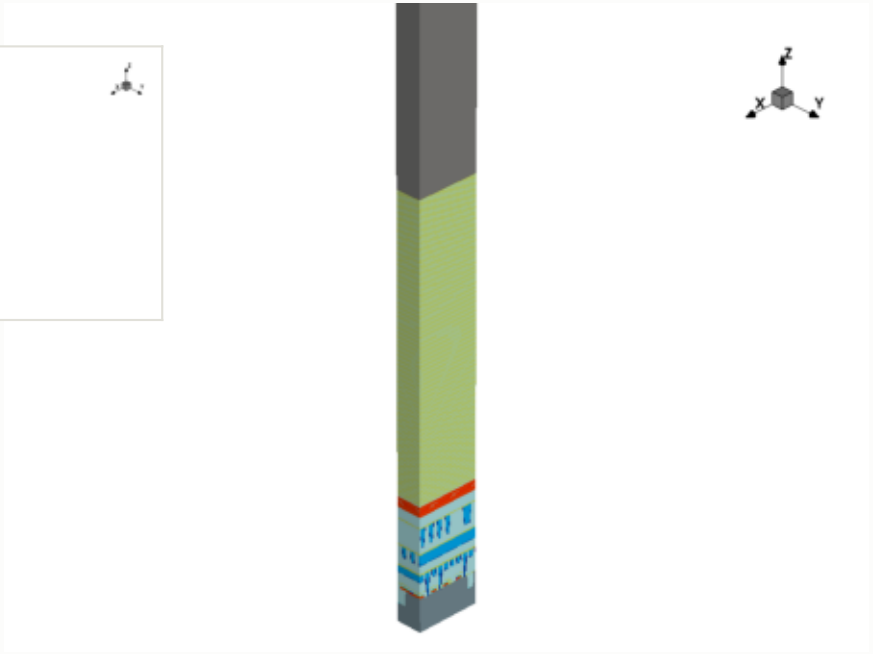


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

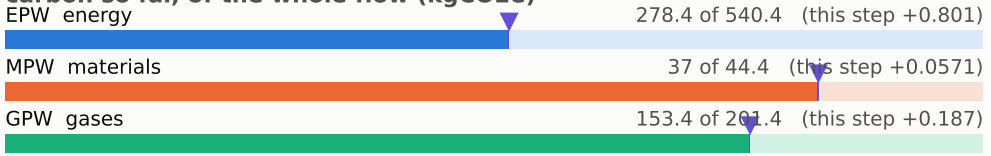


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

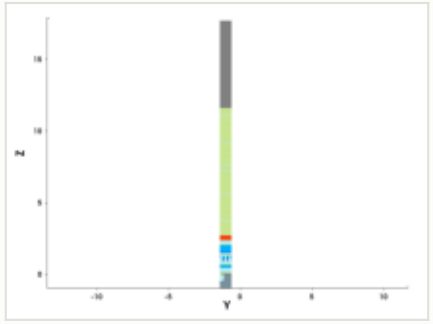


y cut at -1.035 µm

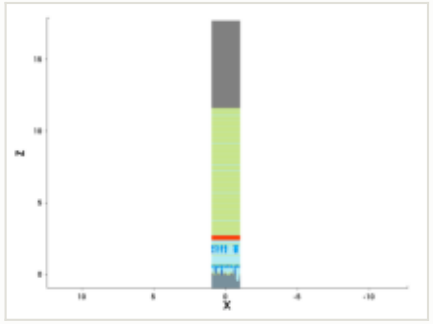


mask for this step

no mask for this step


steps by process area

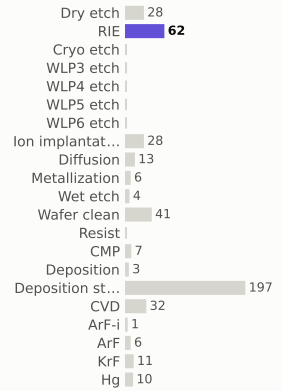

materials deposited (g)

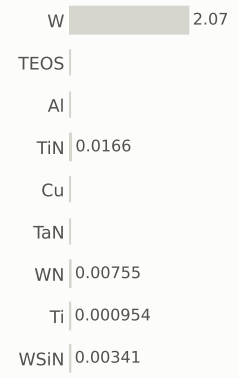

gases emitted (g)

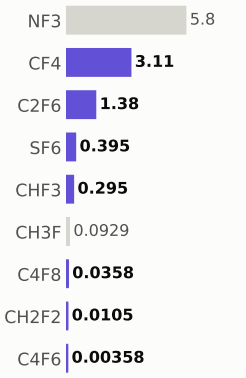


Step #6580: RIE


etch_anisotropic · RIE

1.04	469.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

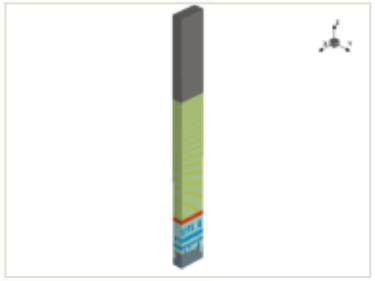

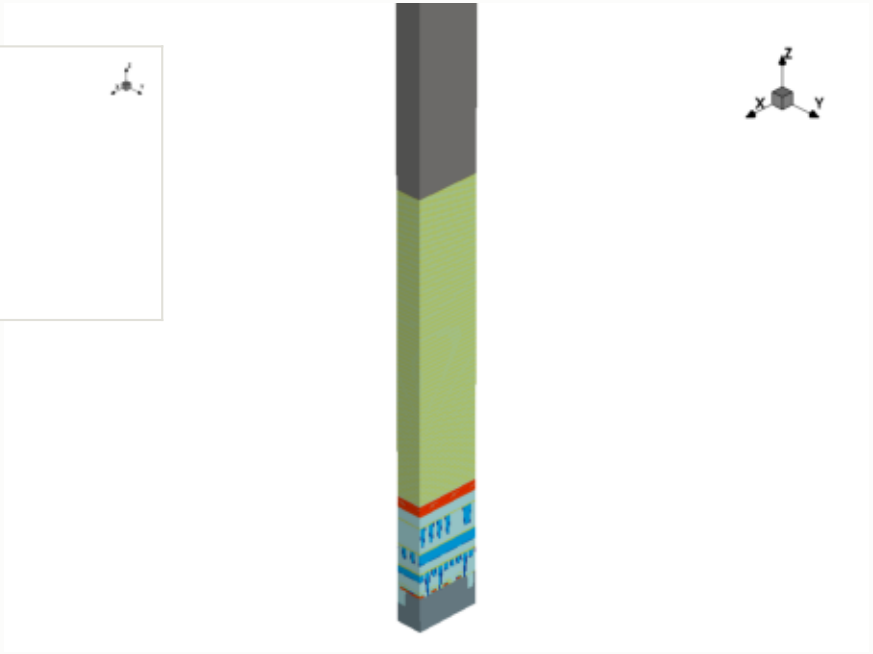


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

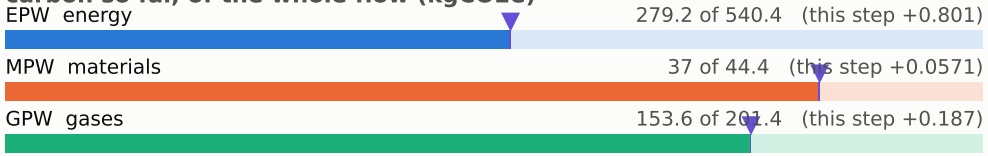


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

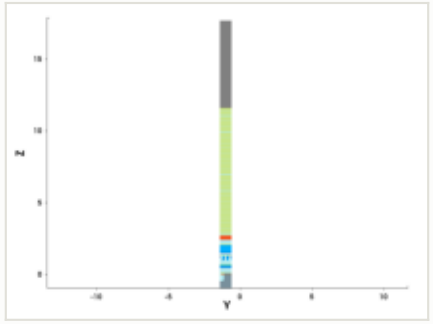


y cut at -1.035 µm

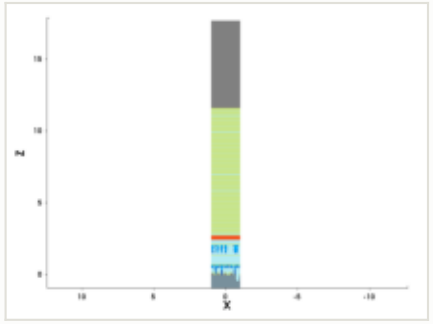


mask for this step

no mask for this step


steps by process area

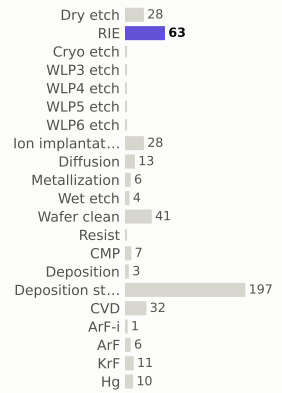

materials deposited (g)

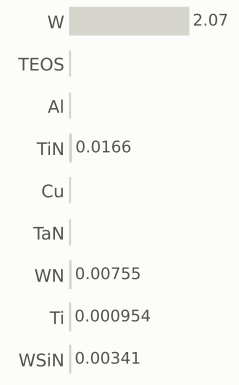

gases emitted (g)

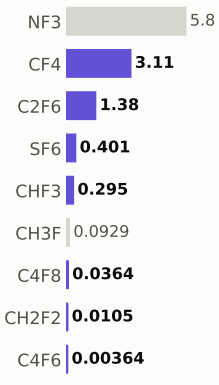

Step #6590: Dry_etch


etch_strip · Dry_etch

0.801	470.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



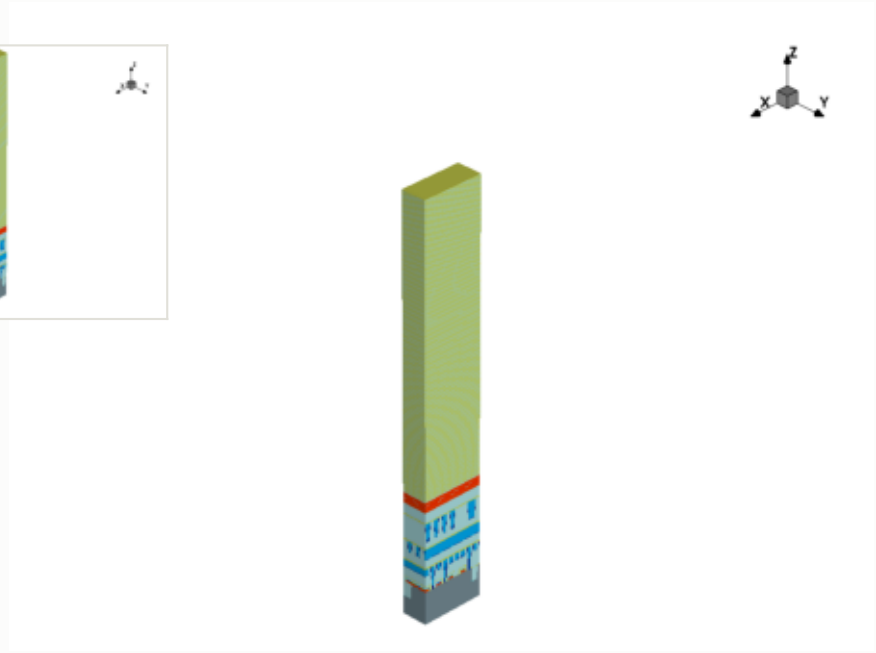


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

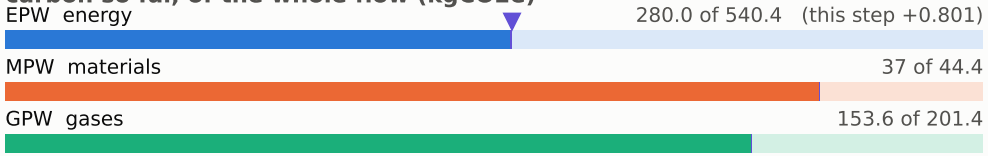


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

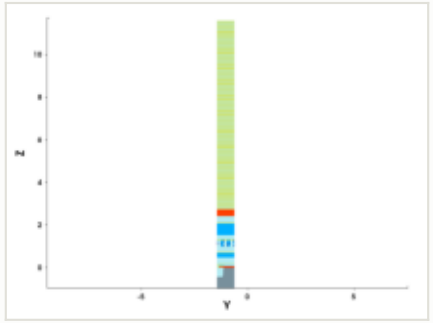


y cut at -1.035 µm

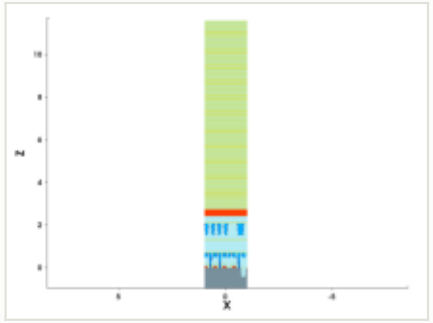

mask for this step

no mask for this step


steps by process area

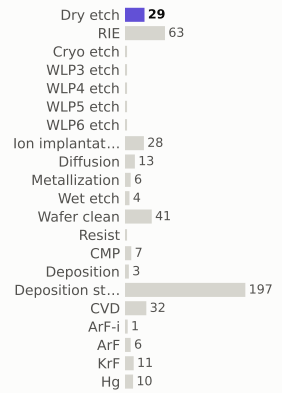

materials deposited (g)



gases emitted (g)



Step #6600: Wafer_clean


clean · Wafer_clean

0.169	470.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




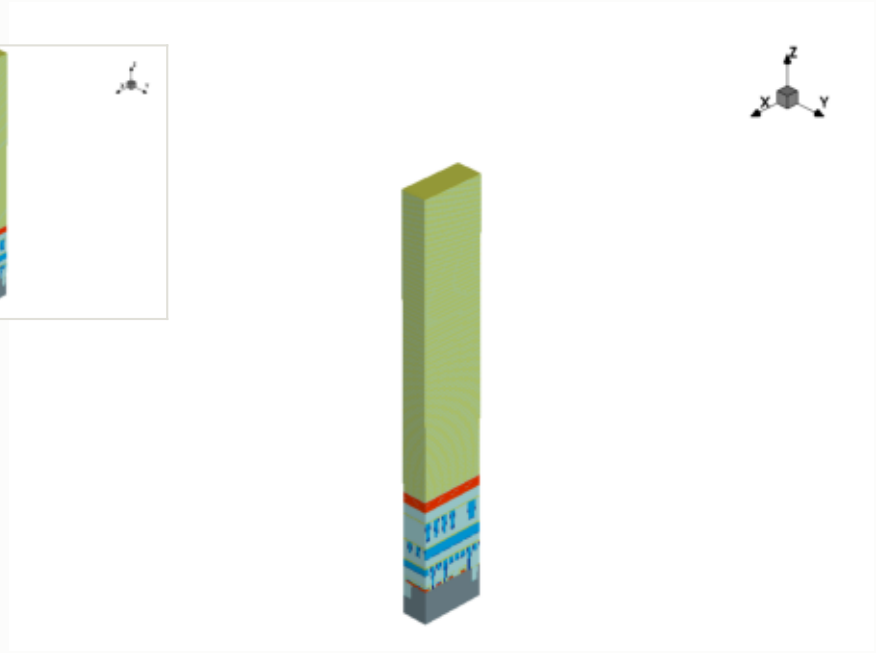

x cut at 0.000 µm

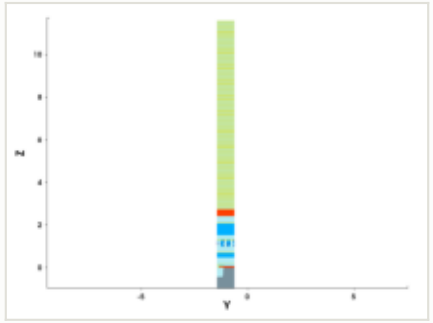

y cut at -1.035 µm

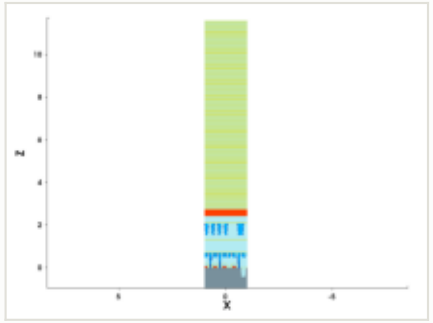

mask for this step

no mask for this step


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead


EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

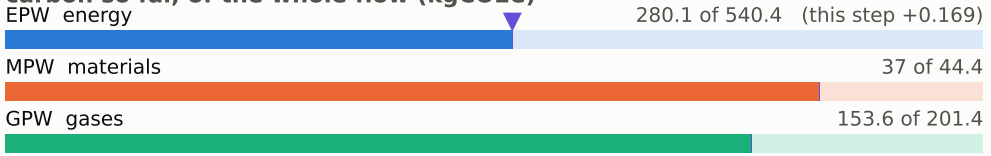


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

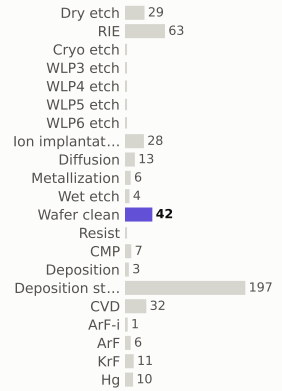

materials deposited (g)

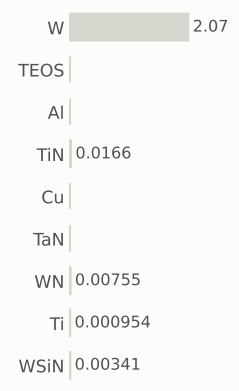

gases emitted (g)

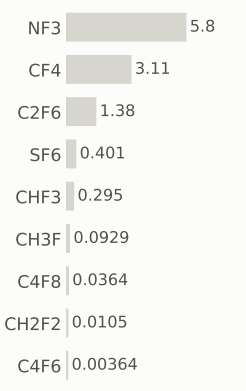

Step #6610: KrF


litho_patterning · KrF

0.199	470.9	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



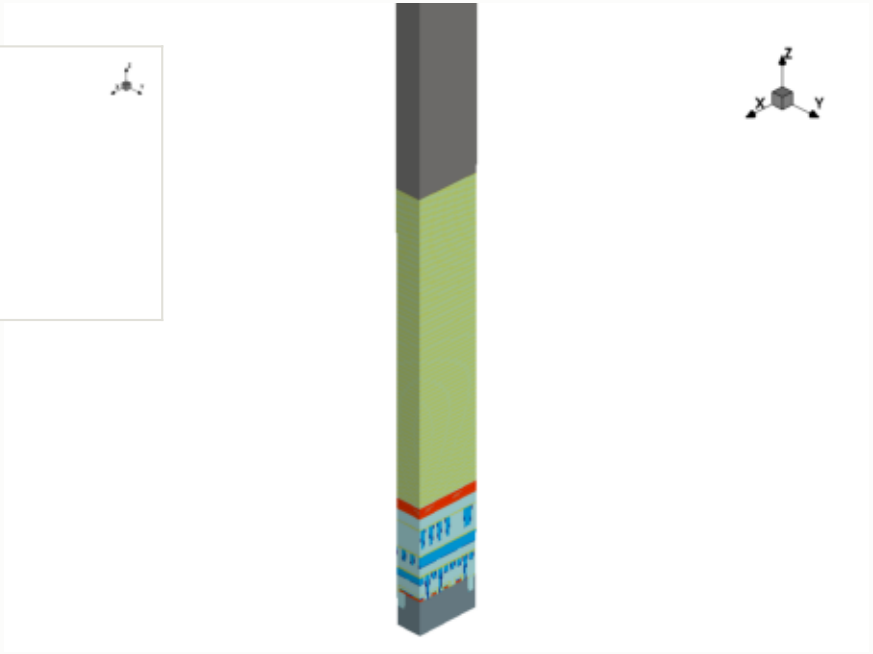


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

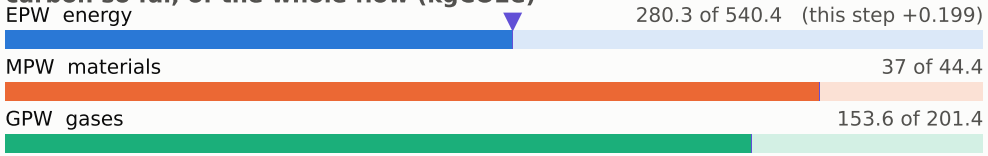


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

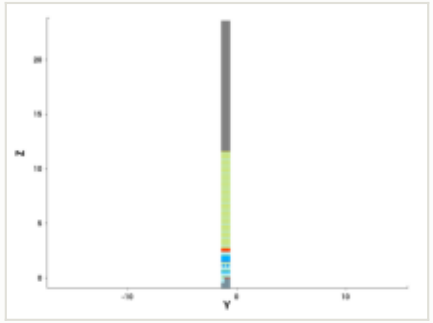


y cut at -1.035 µm

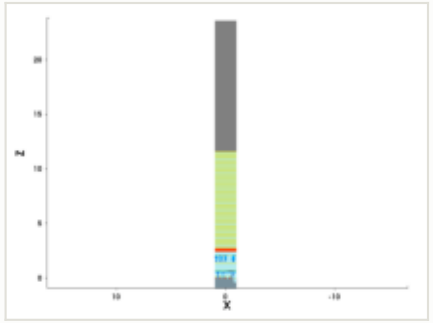


mask: layer 30:0, positive (OASIS)




steps by process area

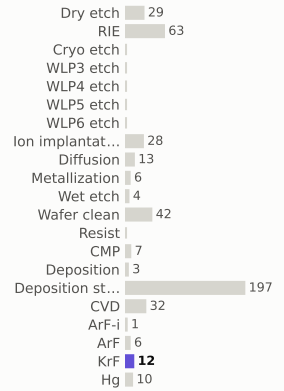

materials deposited (g)

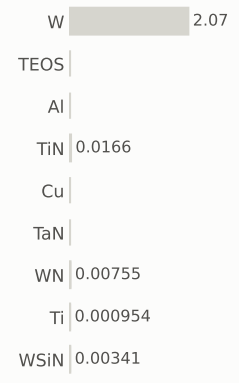

gases emitted (g)

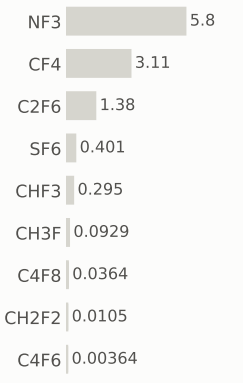

Step #6620: RIE


etch_anisotropic · RIE

1.04	471.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



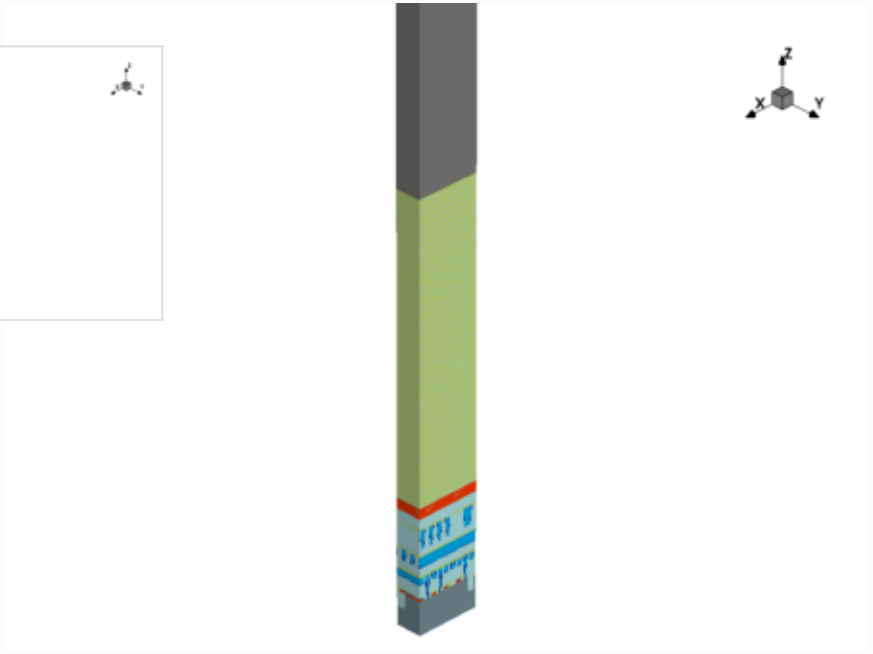


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

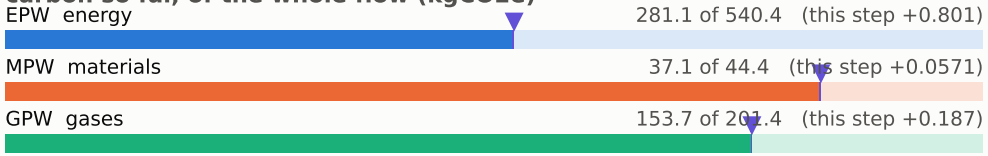


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

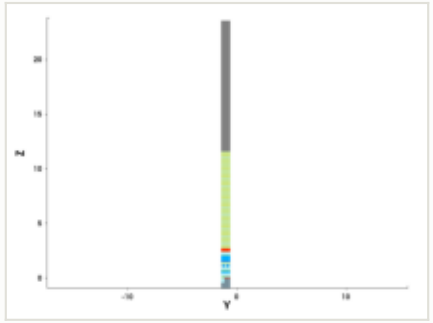


y cut at -1.035 µm

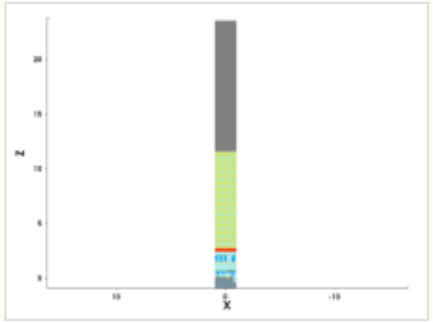


mask for this step

no mask for this step


steps by process area

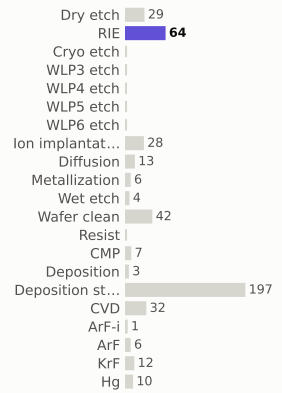

materials deposited (g)

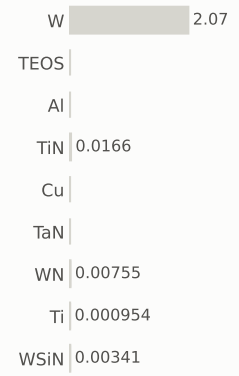

gases emitted (g)

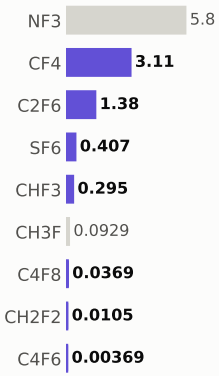

Step #6630: RIE


etch_anisotropic · RIE

1.04	473.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



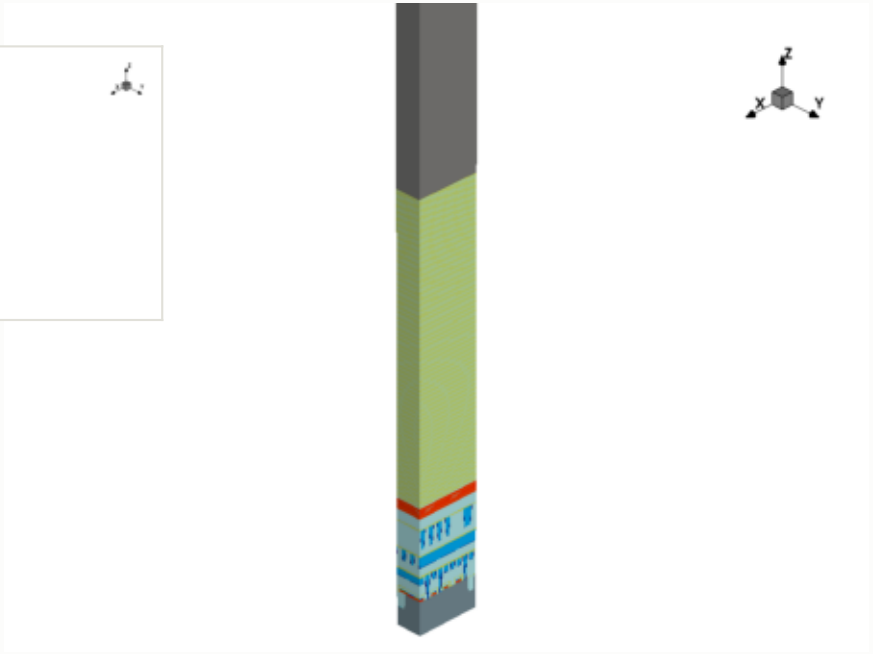


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

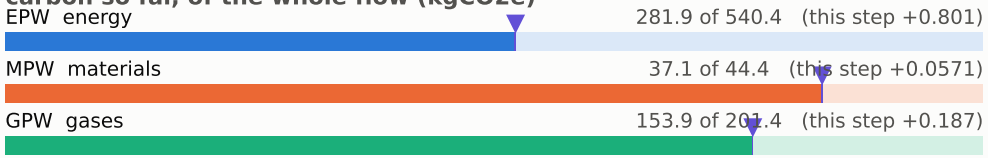


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

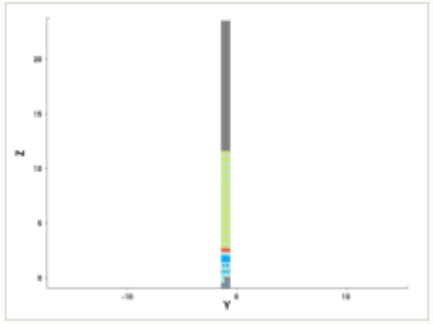


y cut at -1.035 µm

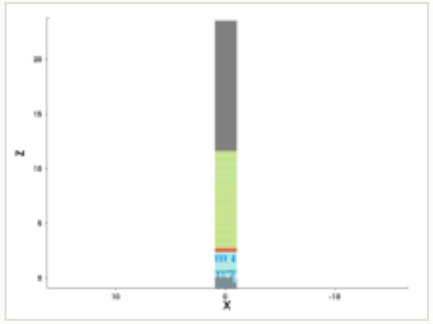


mask for this step

no mask for this step


steps by process area

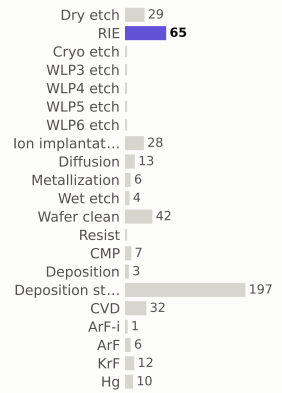

materials deposited (g)

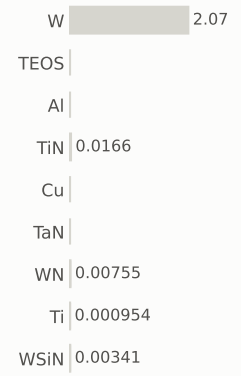

gases emitted (g)

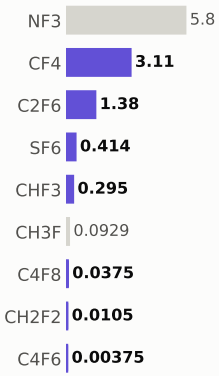

Step #6640: RIE


etch_anisotropic · RIE

1.04	474.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



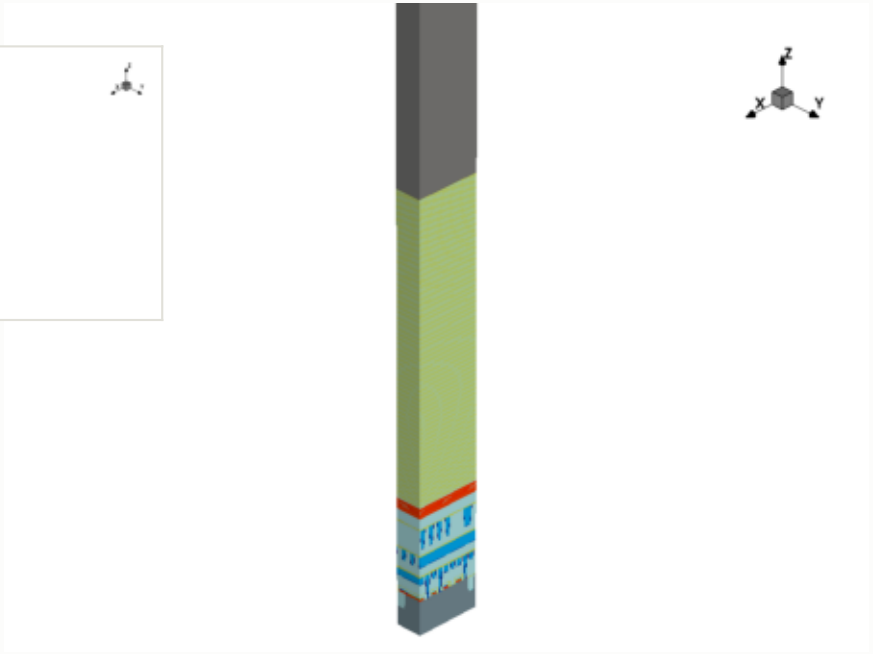


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

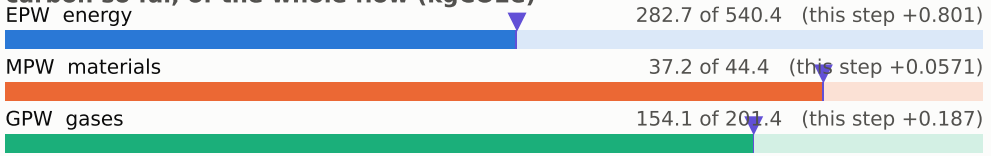


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

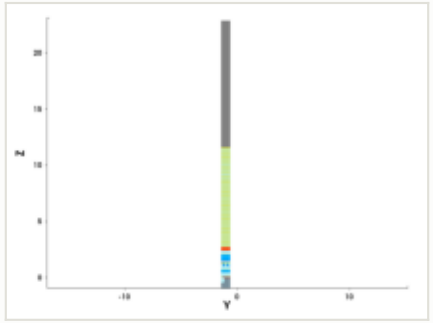


y cut at -1.035 µm

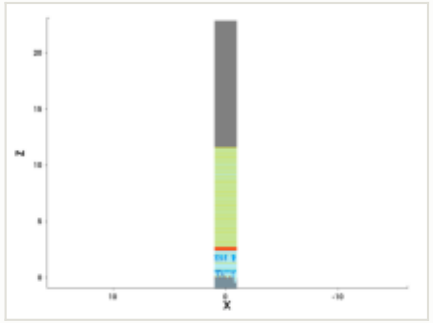


mask for this step

no mask for this step


steps by process area

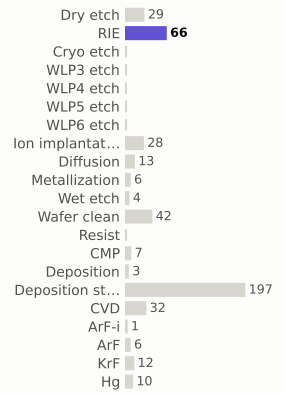

materials deposited (g)

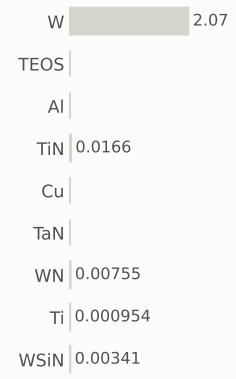

gases emitted (g)

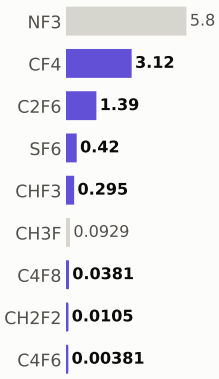

Step #6650: RIE


etch_anisotropic · RIE

1.04	475.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



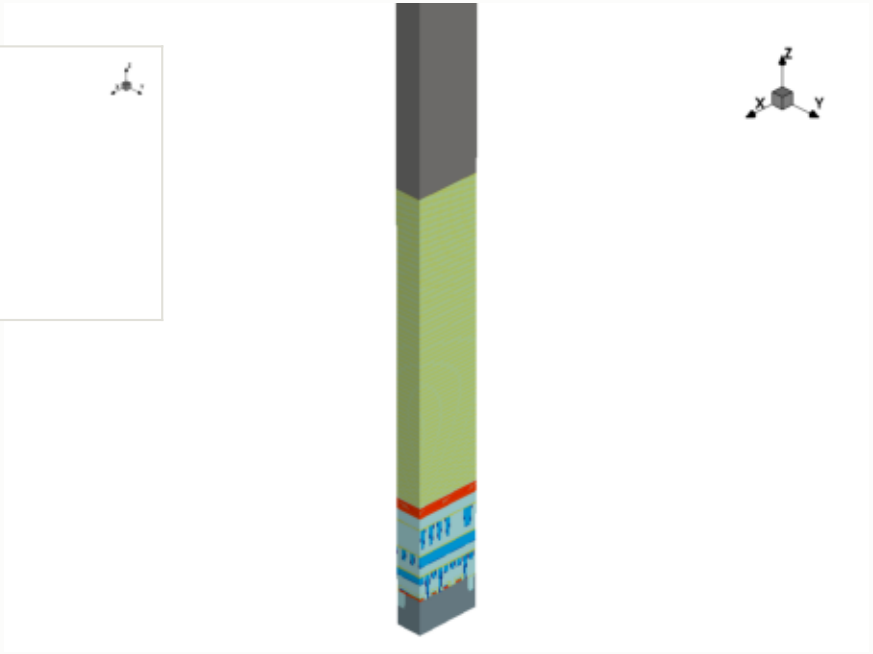


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

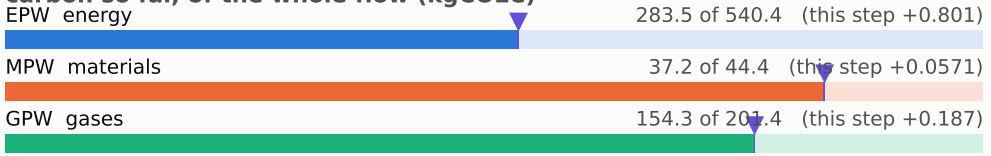


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

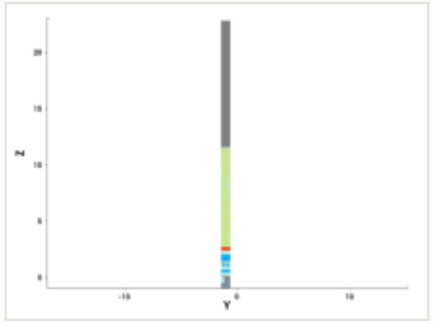


y cut at -1.035 µm

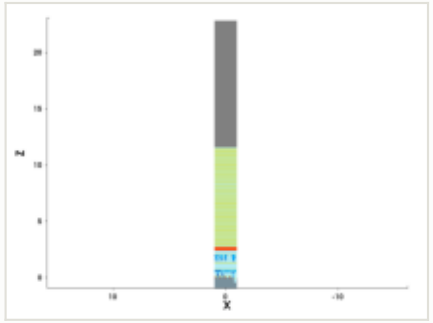

mask for this step

no mask for this step


steps by process area



materials deposited (g)



gases emitted (g)

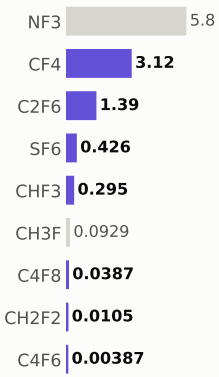

Step #6660: RIE


etch_anisotropic · RIE

1.04	476.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



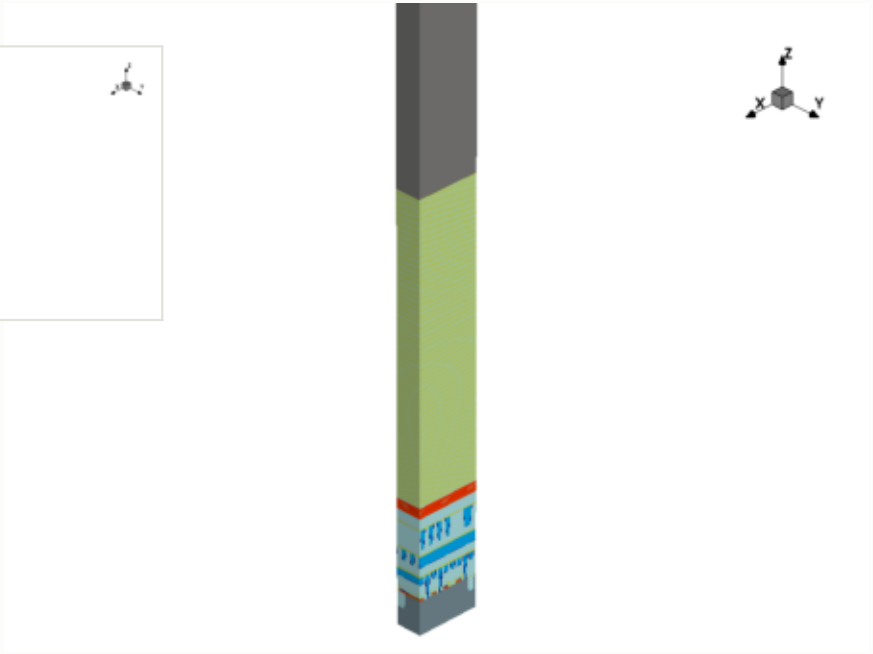


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

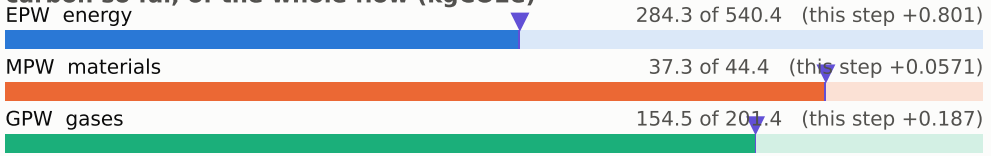


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

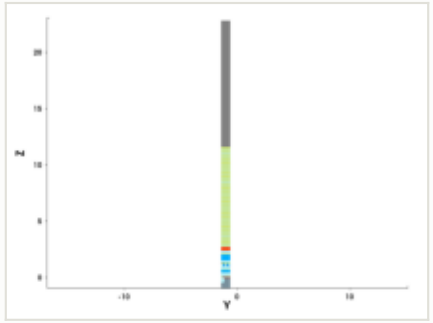


y cut at -1.035 µm

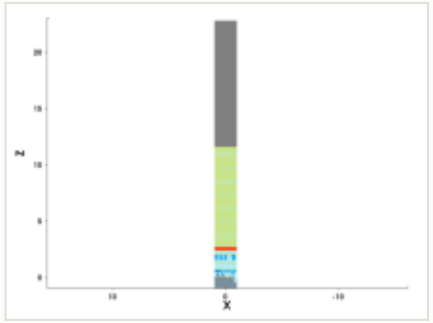


mask for this step

no mask for this step


steps by process area



materials deposited (g)

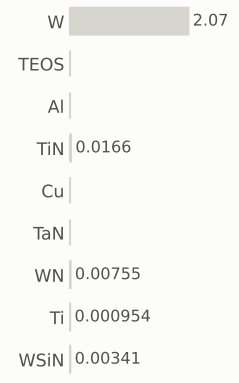

gases emitted (g)



Step #6670: RIE


etch_anisotropic · RIE

1.04	477.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



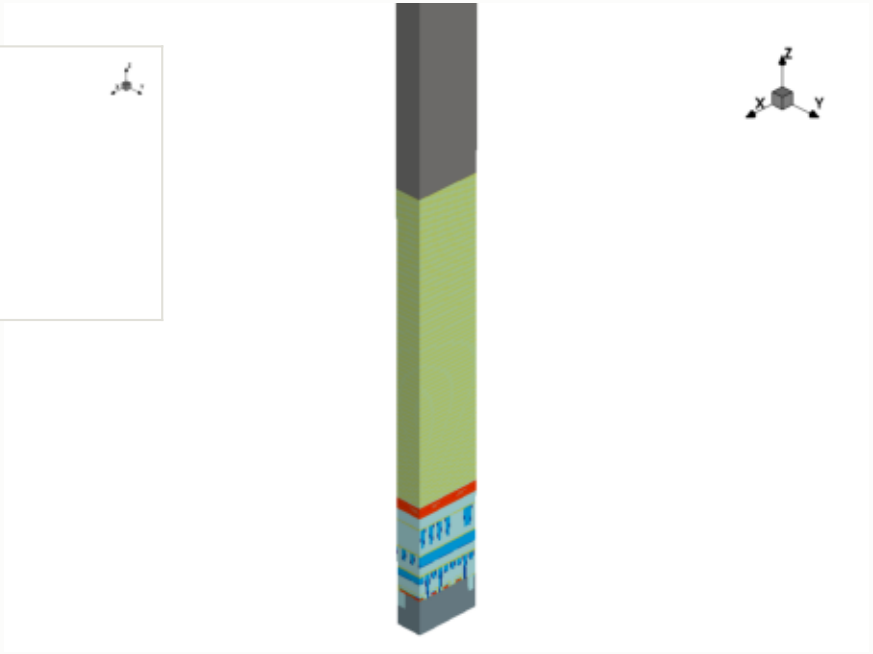


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

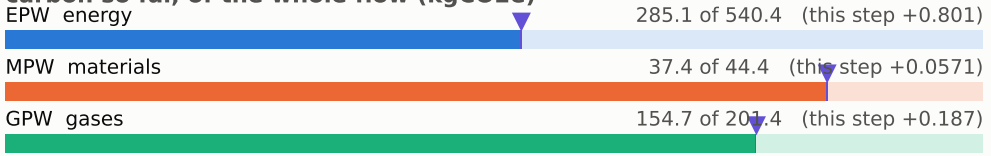


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

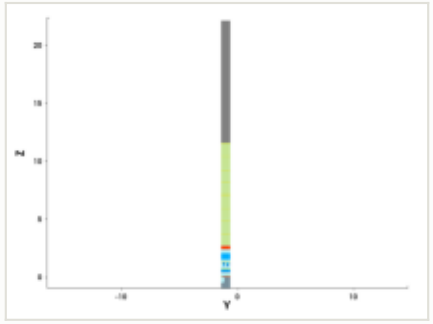


y cut at -1.035 µm

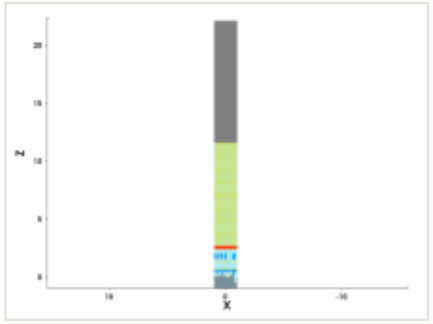

mask for this step

no mask for this step


steps by process area

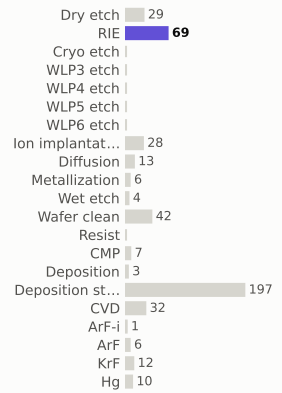

materials deposited (g)



gases emitted (g)

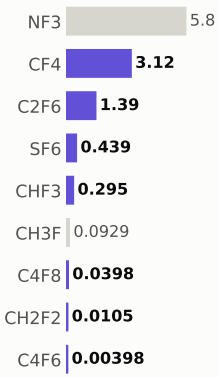

Step #6680: RIE


etch_anisotropic · RIE

1.04	478.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



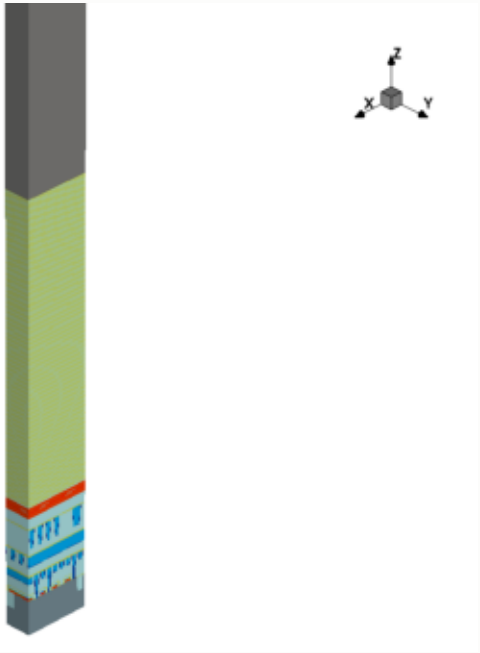


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

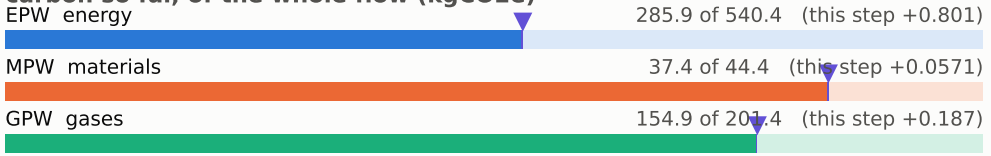


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

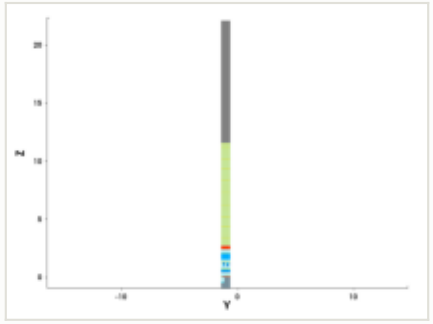


y cut at -1.035 µm

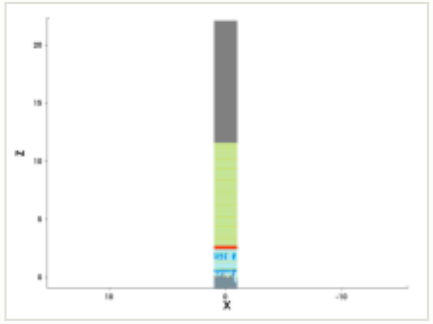

mask for this step

no mask for this step


steps by process area

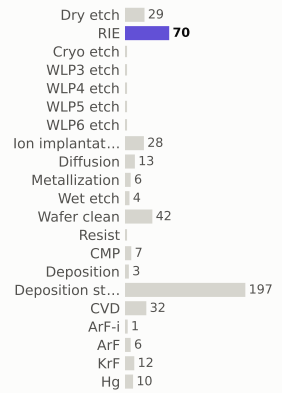

materials deposited (g)



gases emitted (g)

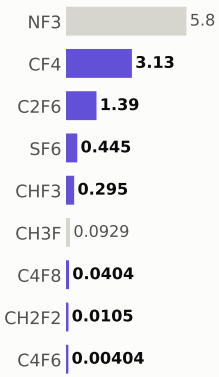

Step #6690: RIE


etch_anisotropic · RIE

1.04	479.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



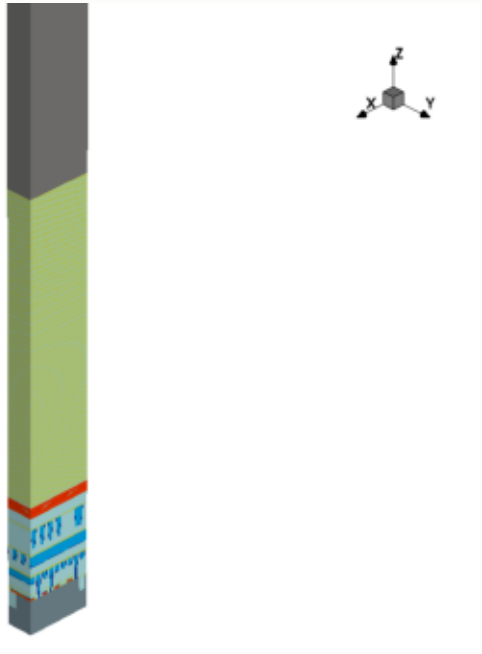


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

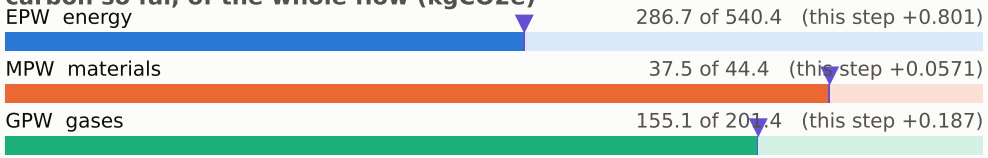


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

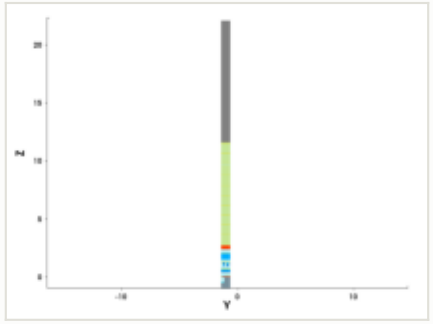


y cut at -1.035 µm

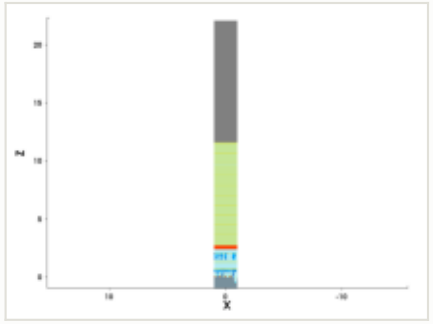

mask for this step

no mask for this step


steps by process area



materials deposited (g)



gases emitted (g)

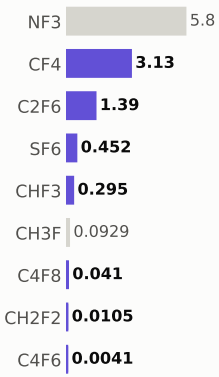

Step #6700: RIE


etch_anisotropic · RIE

1.04	480.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



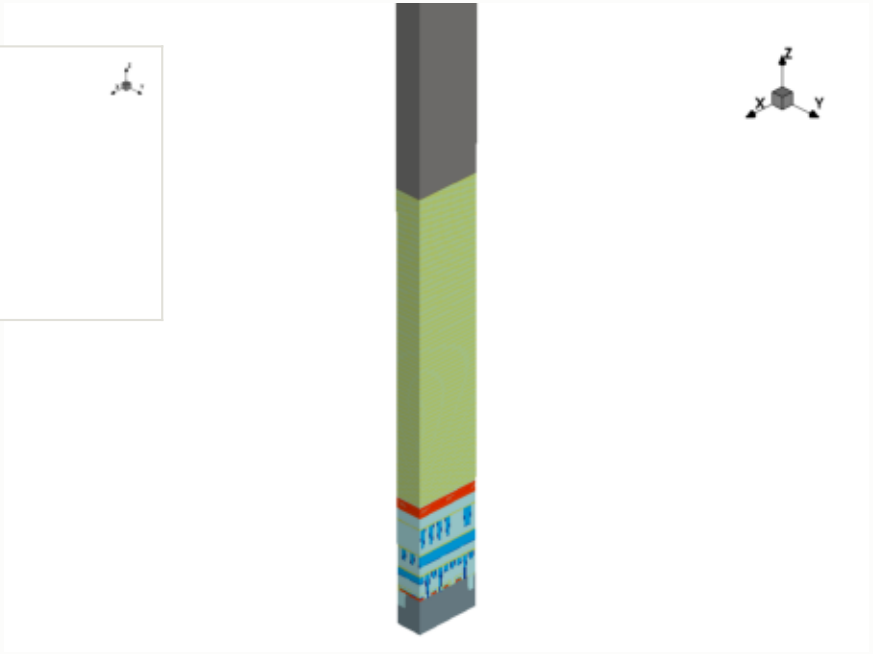


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

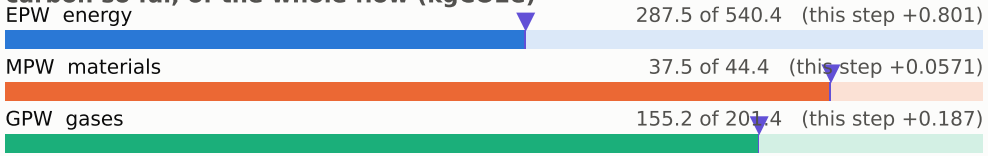


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

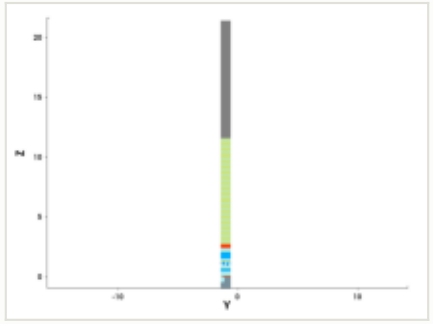


y cut at -1.035 µm

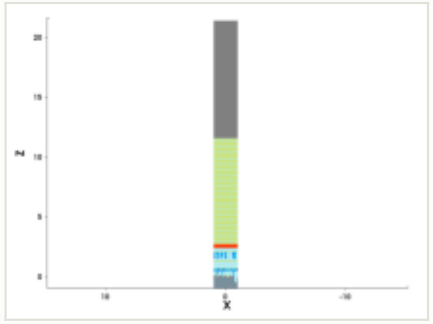

mask for this step

no mask for this step


steps by process area

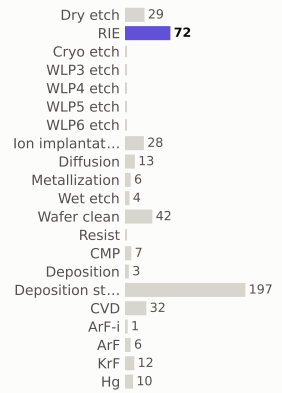

materials deposited (g)



gases emitted (g)

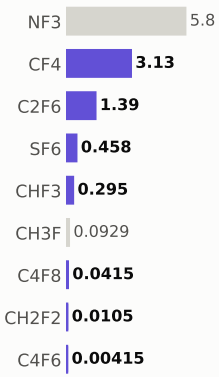


Step #6710: RIE

etch_anisotropic · RIE

1.04	481.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

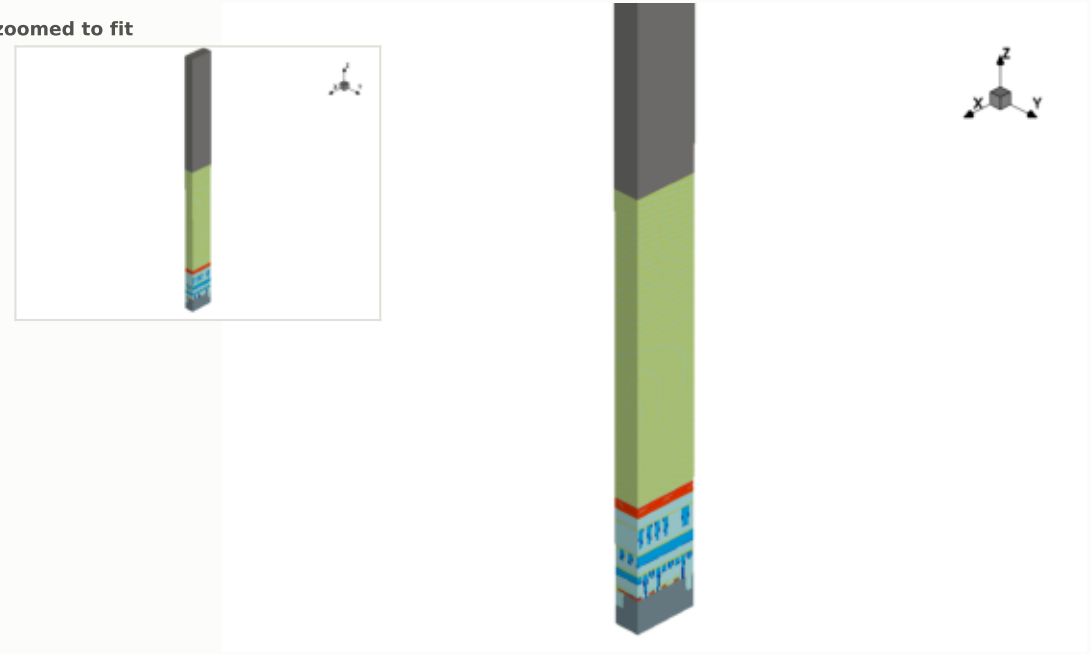


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

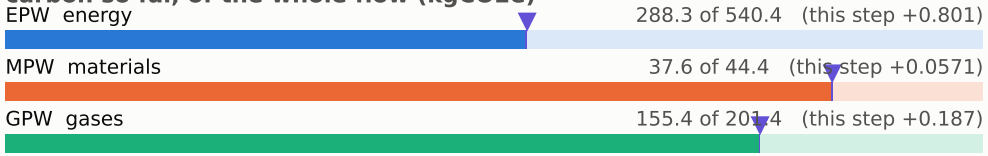


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

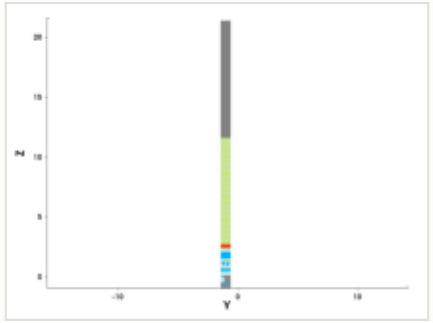


y cut at -1.035 µm

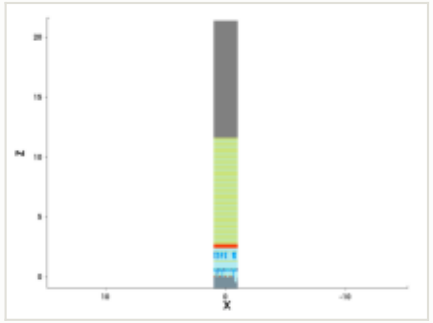


mask for this step

no mask for this step


steps by process area

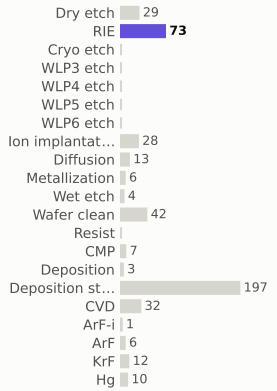

materials deposited (g)

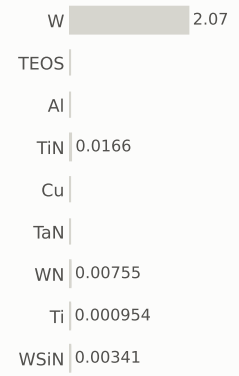

gases emitted (g)

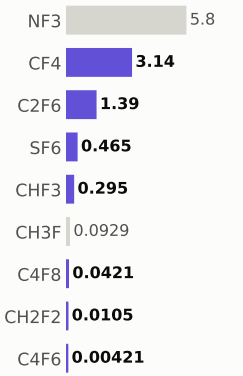

Step #6720: RIE


etch_anisotropic · RIE

1.04	482.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



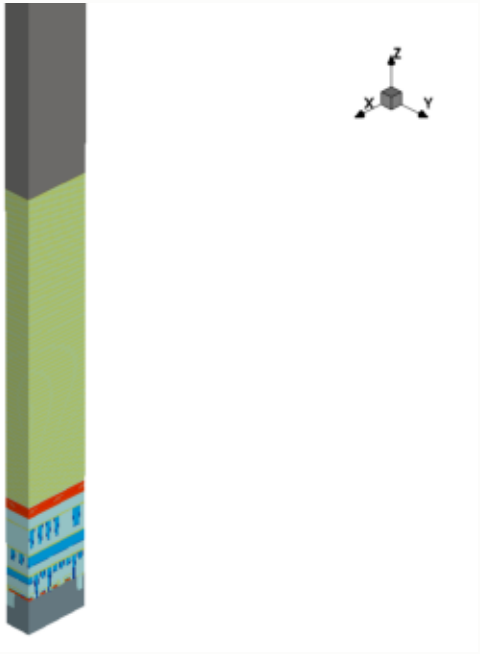


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

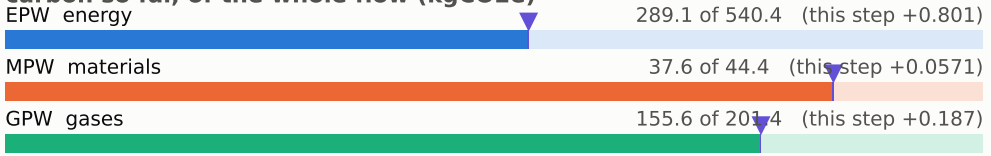


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

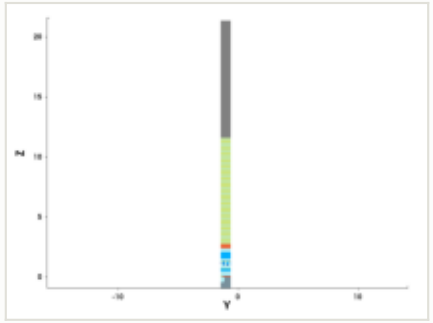


y cut at -1.035 µm

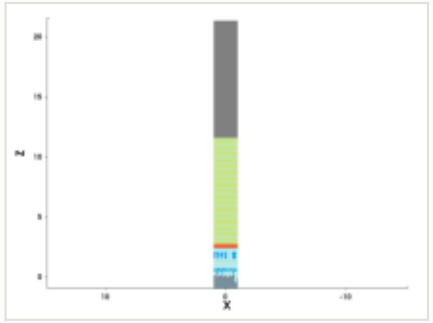


mask for this step

no mask for this step


steps by process area

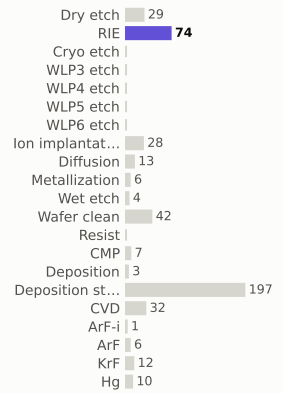

materials deposited (g)

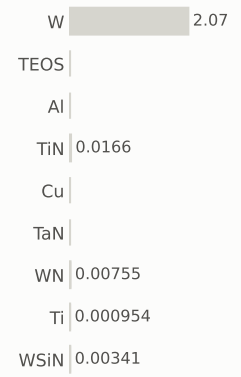

gases emitted (g)

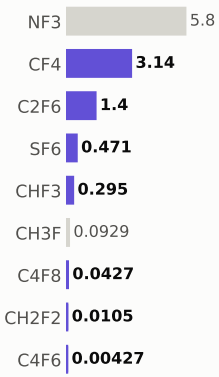

Step #6730: RIE


etch_anisotropic · RIE

1.04	483.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



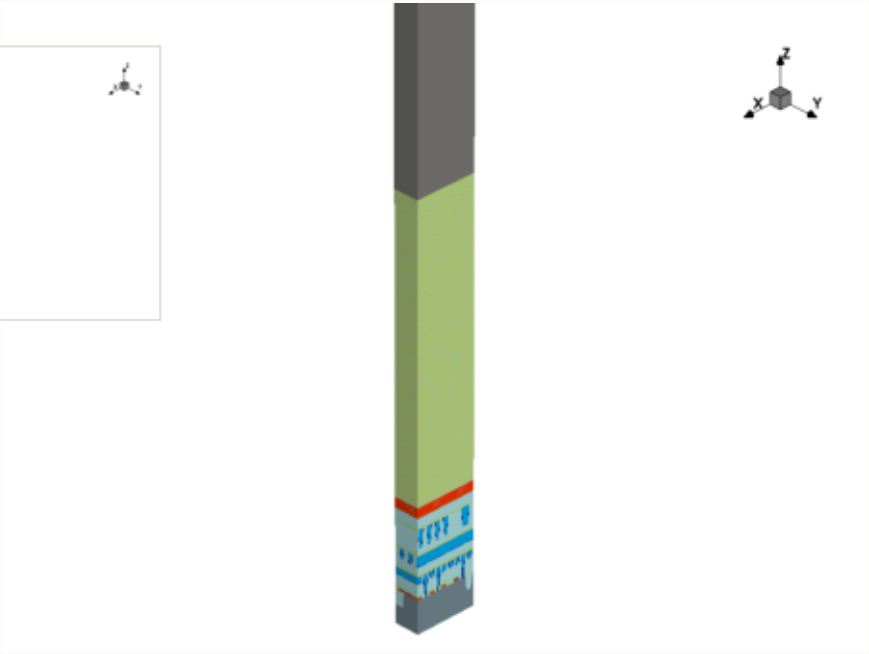


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

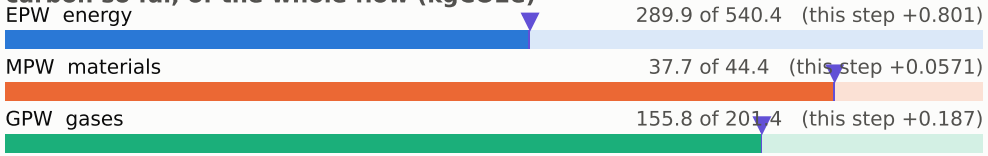


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

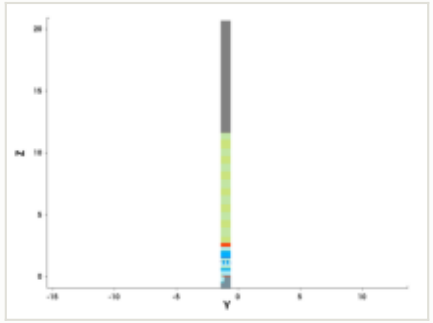


y cut at -1.035 µm

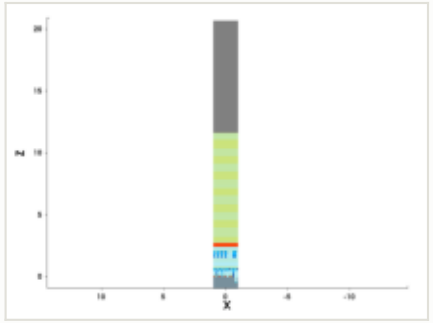

mask for this step

no mask for this step


steps by process area

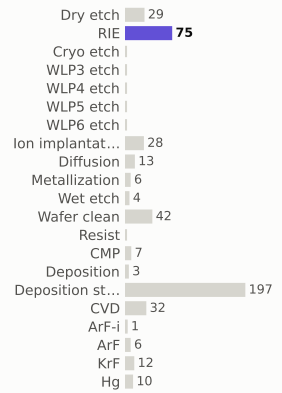

materials deposited (g)



gases emitted (g)

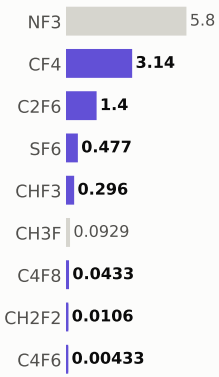

Step #6740: RIE


etch_anisotropic · RIE

1.04	484.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



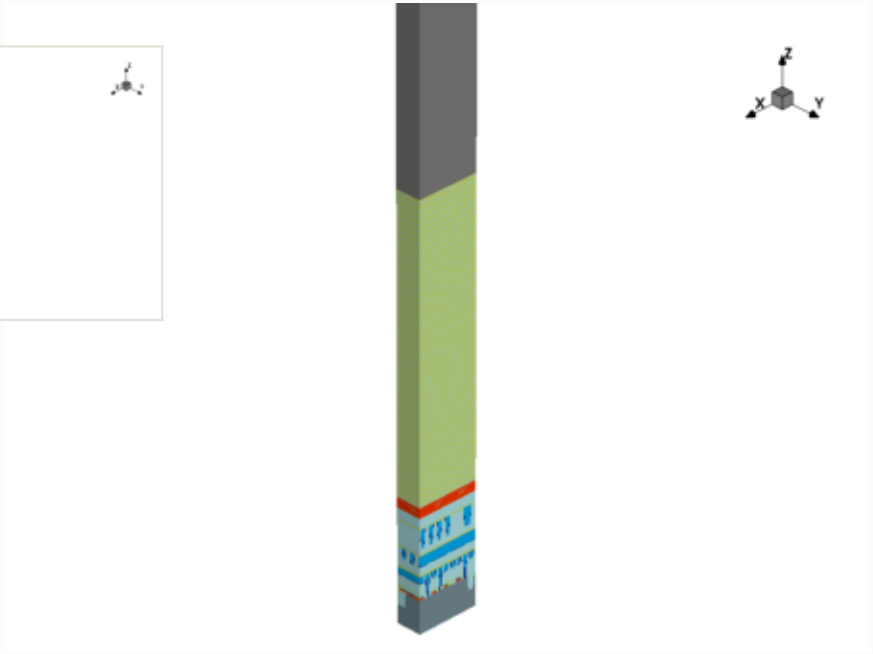


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

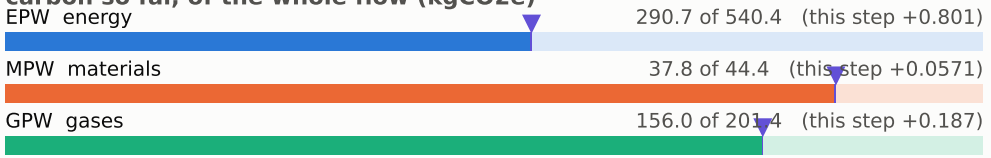


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

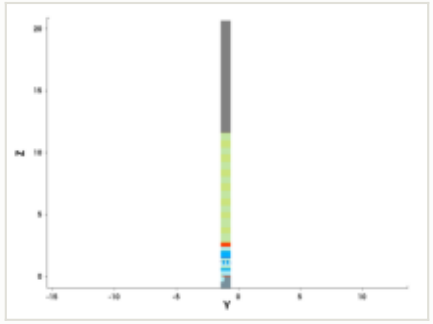


y cut at -1.035 µm

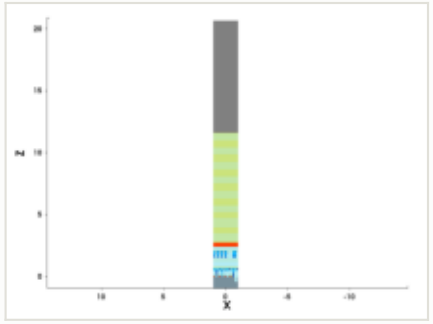

mask for this step

no mask for this step


steps by process area

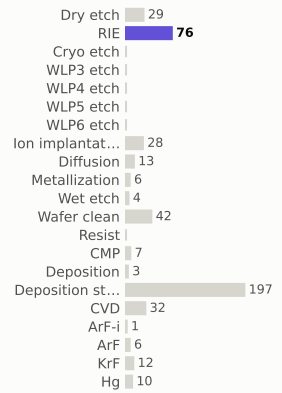

materials deposited (g)



gases emitted (g)

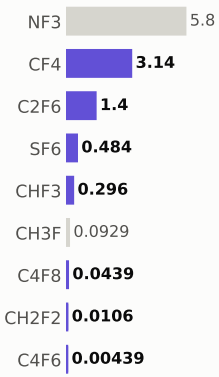

Step #6750: RIE


etch_anisotropic · RIE

1.04	485.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



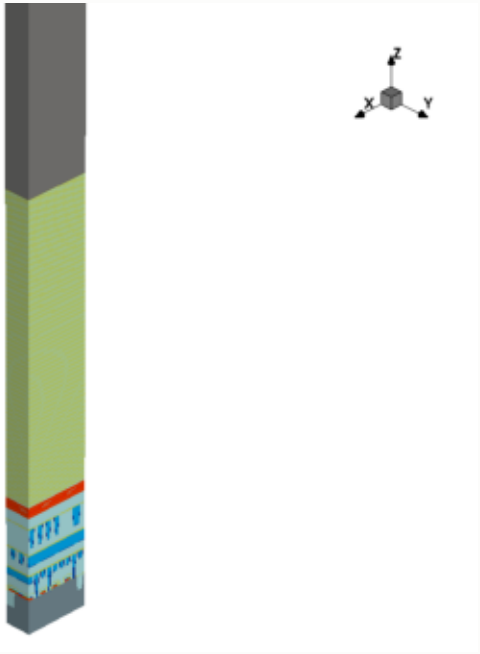


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

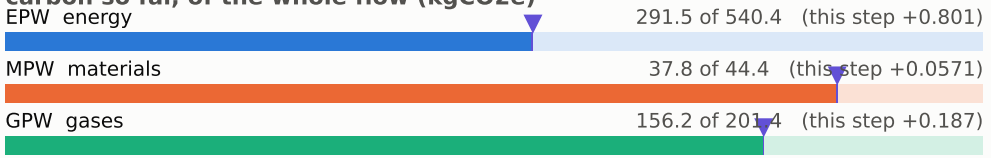


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

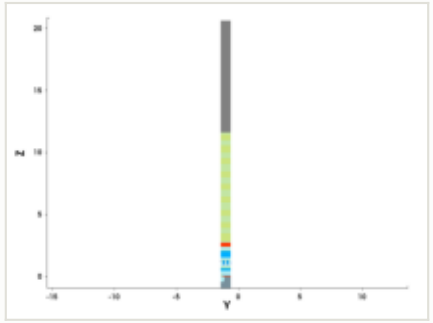


y cut at -1.035 µm

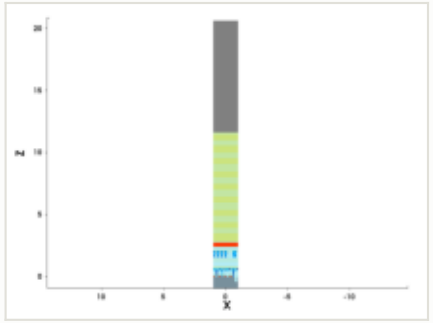

mask for this step

no mask for this step


steps by process area

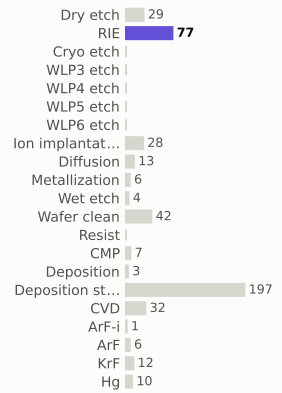

materials deposited (g)



gases emitted (g)

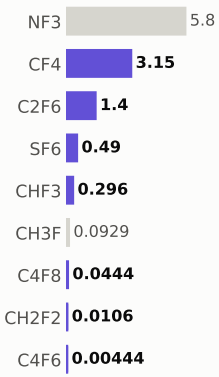

Step #6760: RIE


etch_anisotropic · RIE

1.04	486.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



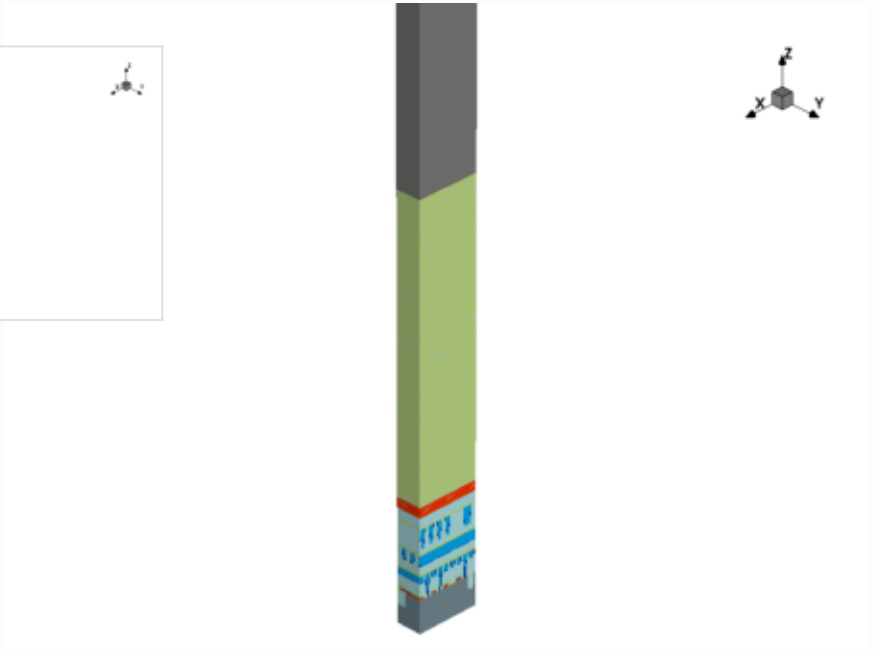


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

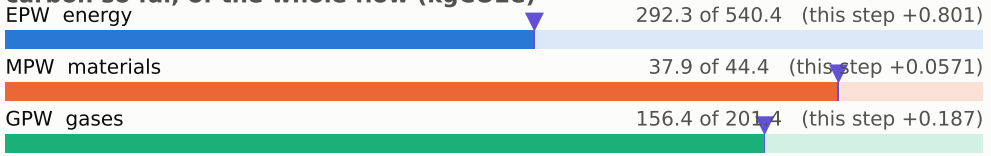


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

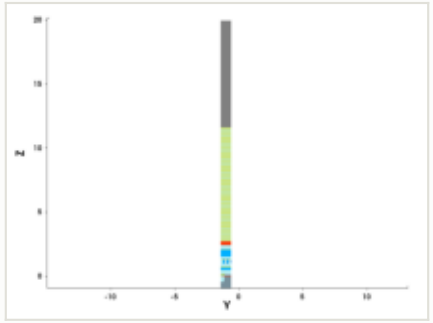


y cut at -1.035 µm

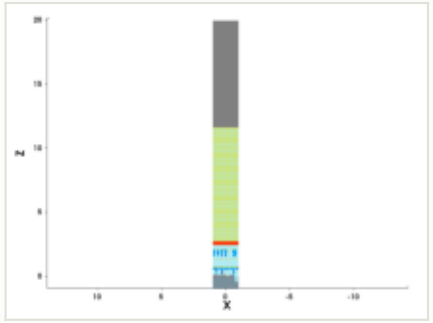


mask for this step

no mask for this step


steps by process area

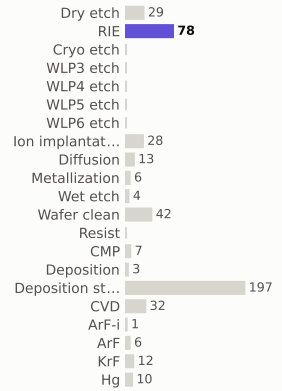

materials deposited (g)

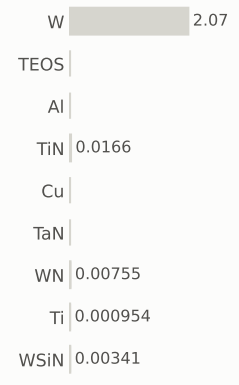

gases emitted (g)




Step #6770: RIE


etch_anisotropic · RIE

1.04	487.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

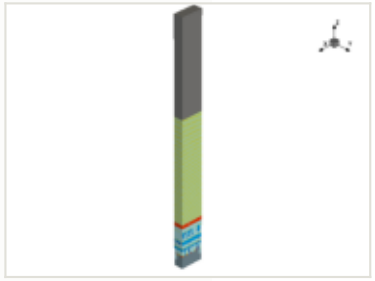

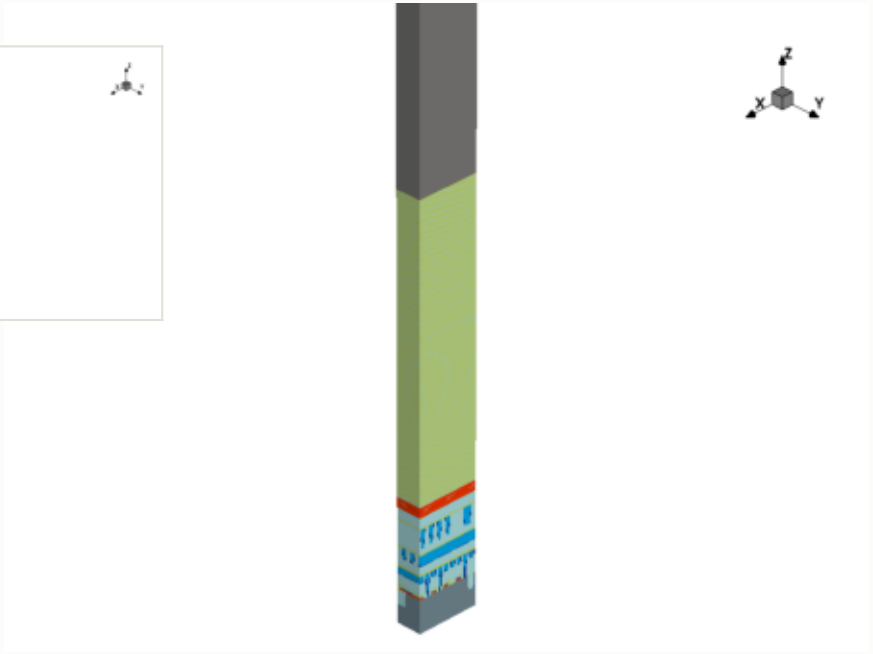


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

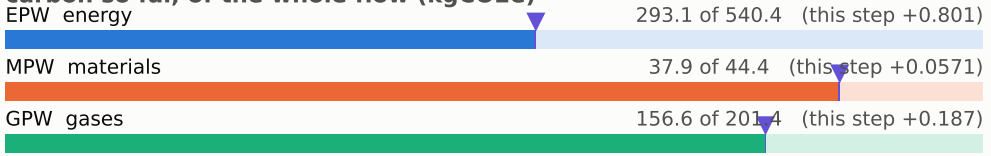


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

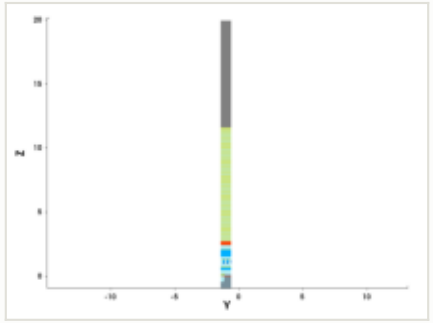


y cut at -1.035 µm

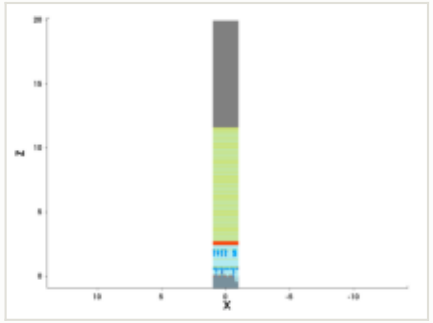


mask for this step

no mask for this step


steps by process area

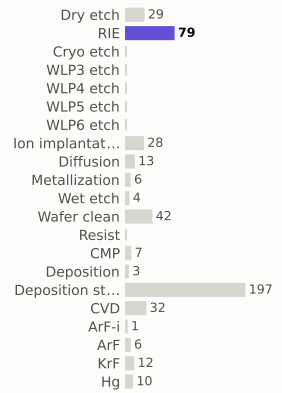

materials deposited (g)

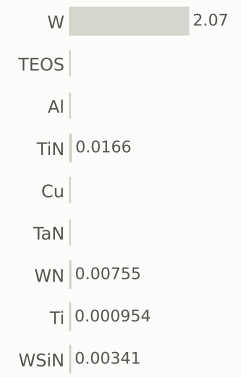

gases emitted (g)

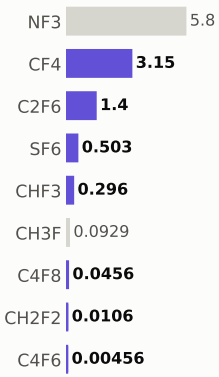


Step #6780: RIE


etch_anisotropic · RIE

1.04	488.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

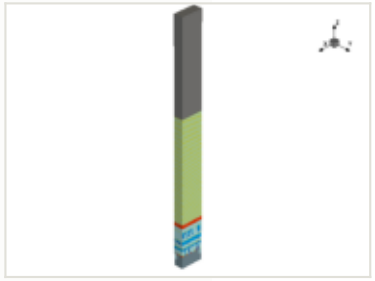

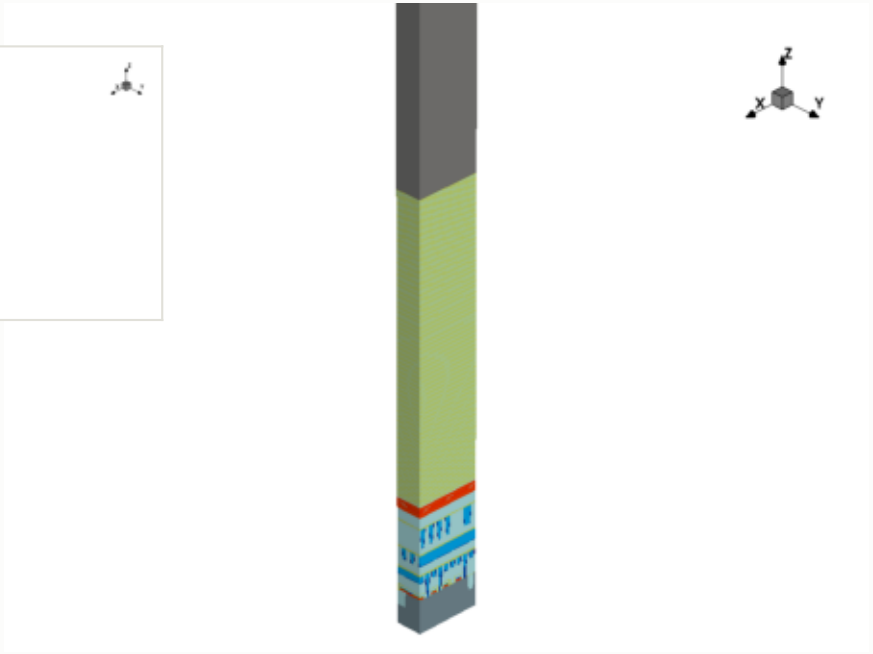


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

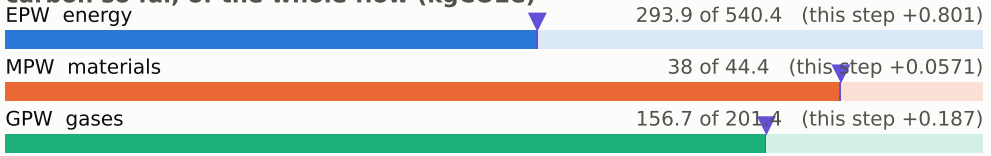


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

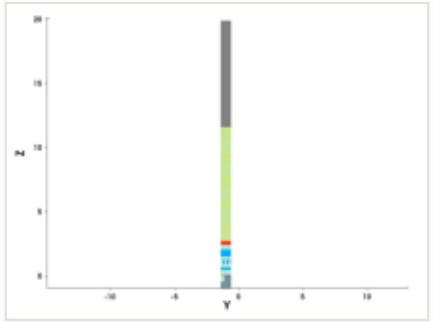


y cut at -1.035 µm

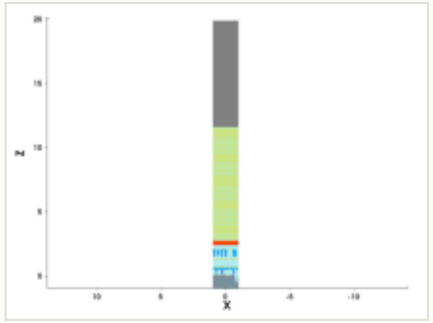

mask for this step

no mask for this step


steps by process area

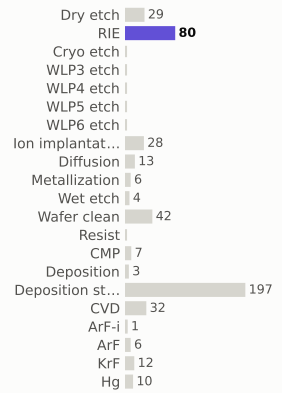

materials deposited (g)



gases emitted (g)

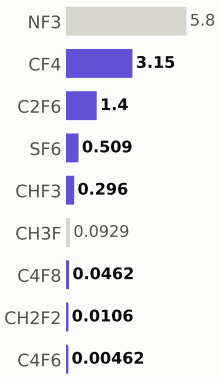


Step #6790: RIE


etch_anisotropic · RIE

1.04	489.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

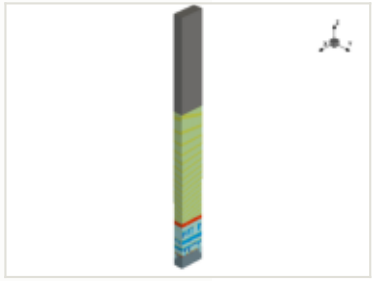

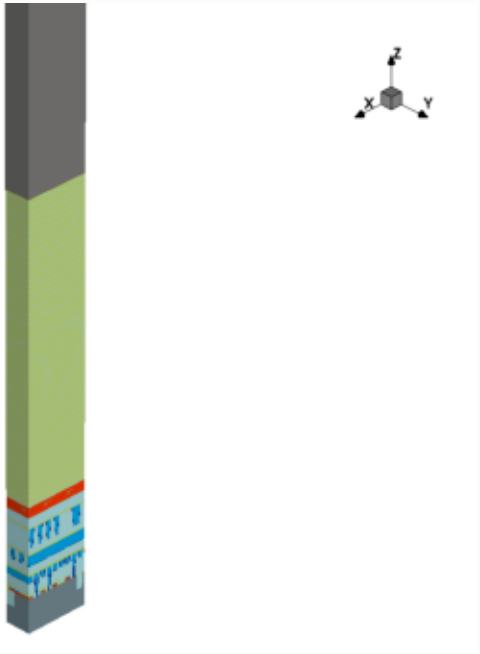


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

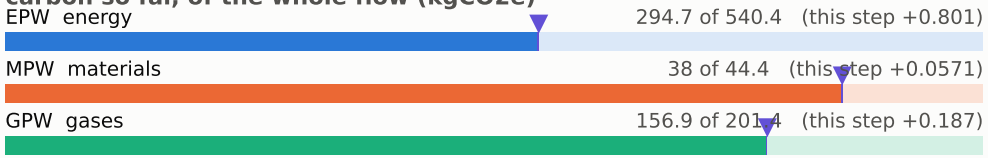


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

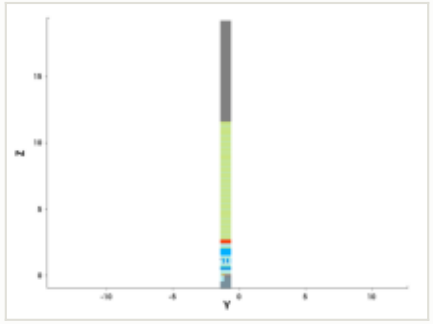


y cut at -1.035 µm

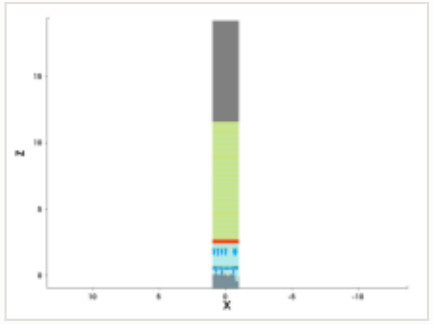


mask for this step

no mask for this step


steps by process area

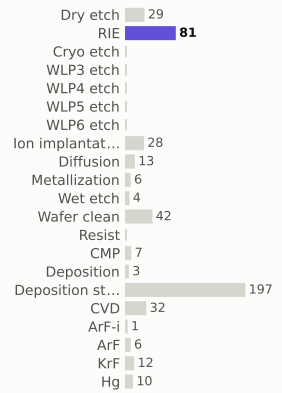

materials deposited (g)

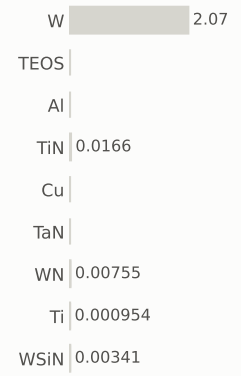

gases emitted (g)

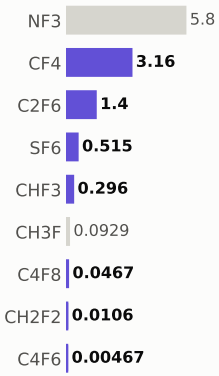


Step #6800: RIE


etch_anisotropic · RIE

1.04	490.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

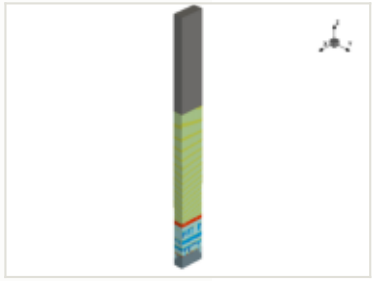

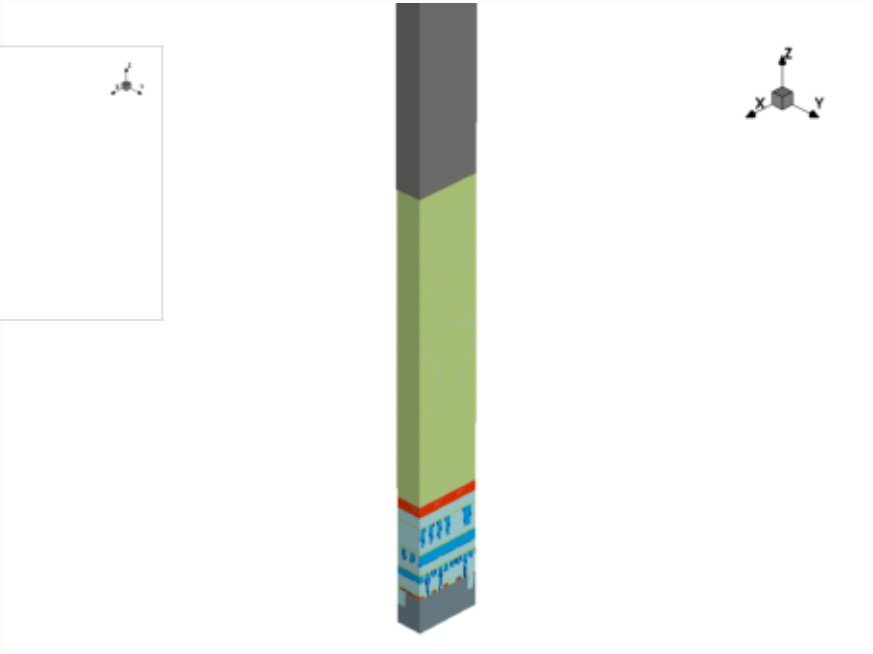


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

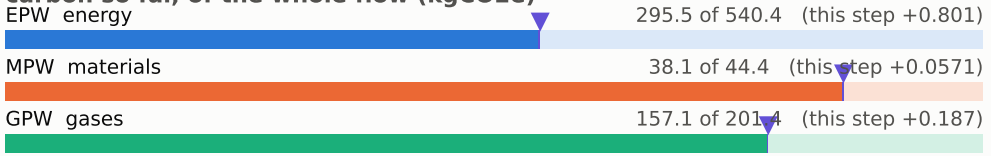


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

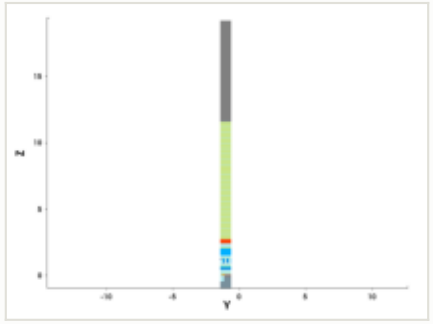


y cut at -1.035 µm

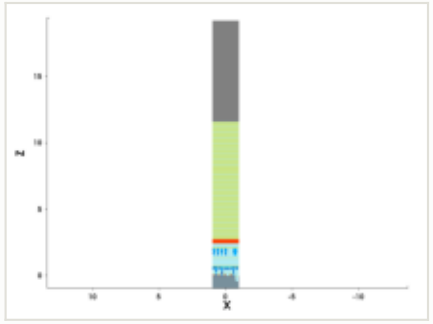


mask for this step

no mask for this step


steps by process area

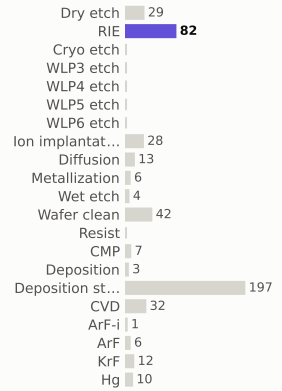

materials deposited (g)

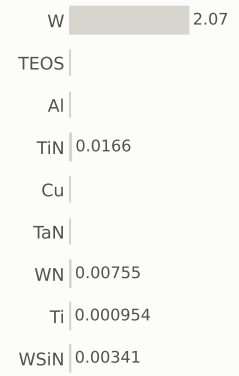

gases emitted (g)

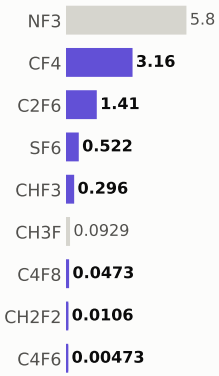


Step #6810: RIE


etch_anisotropic · RIE

1.04	491.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

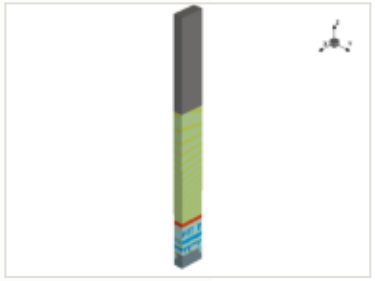

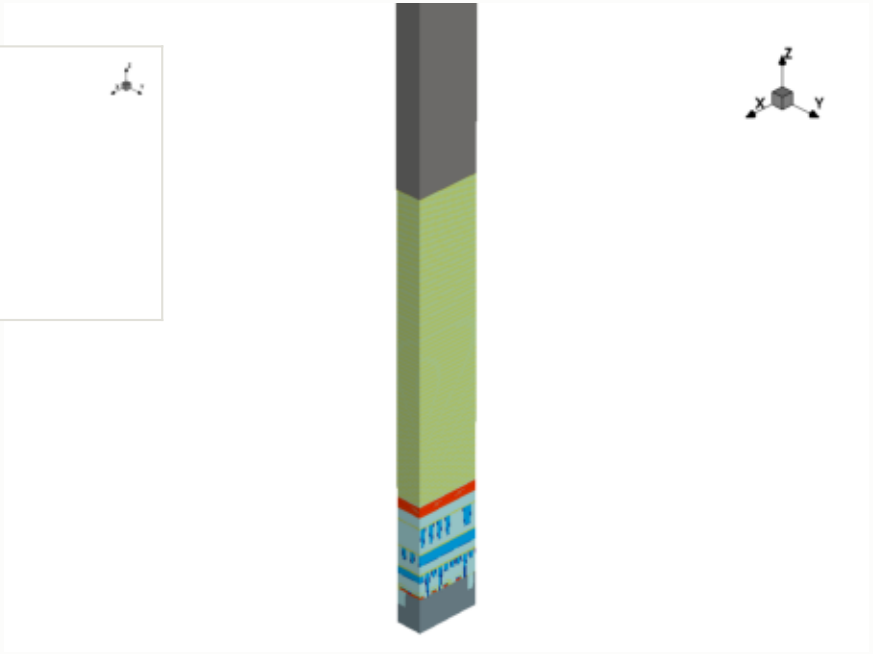


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

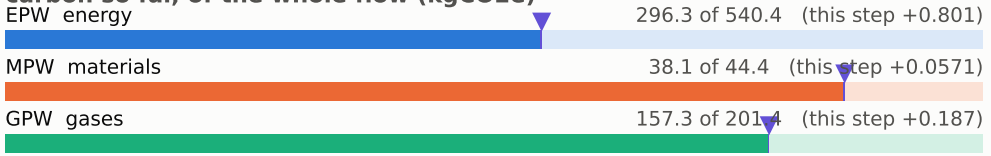


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

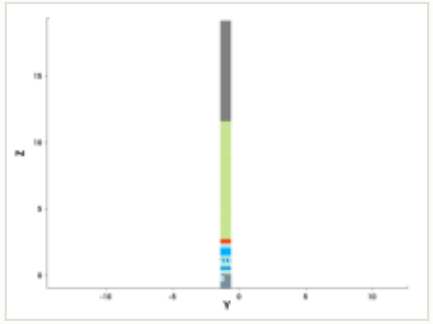


y cut at -1.035 µm

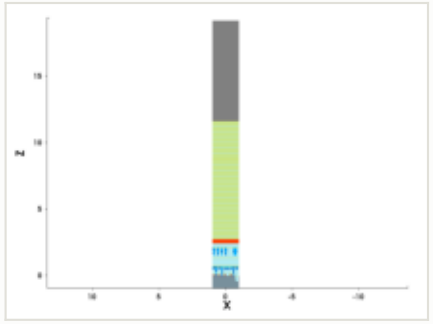


mask for this step

no mask for this step


steps by process area

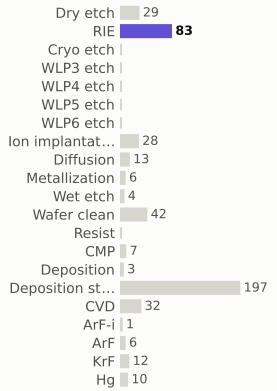

materials deposited (g)

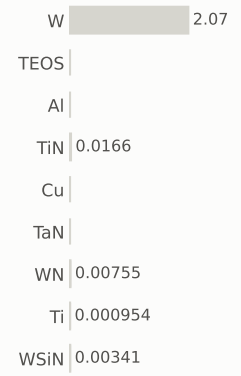

gases emitted (g)

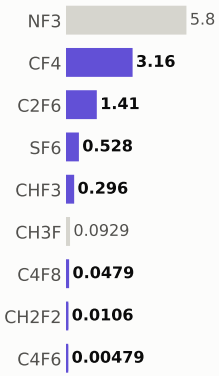


Step #6820: RIE


etch_anisotropic · RIE

1.04	492.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

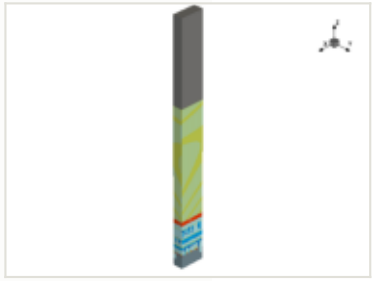

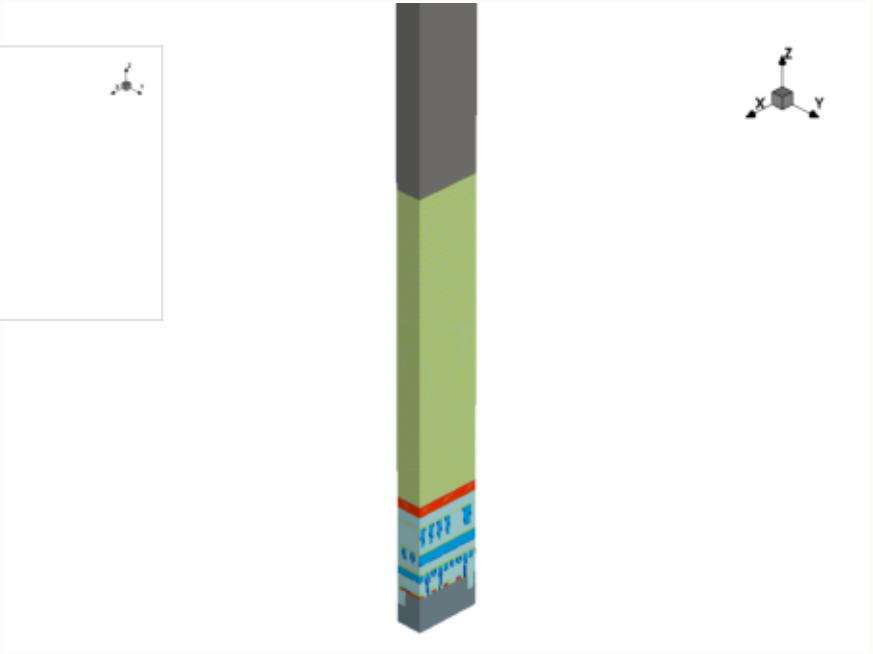


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

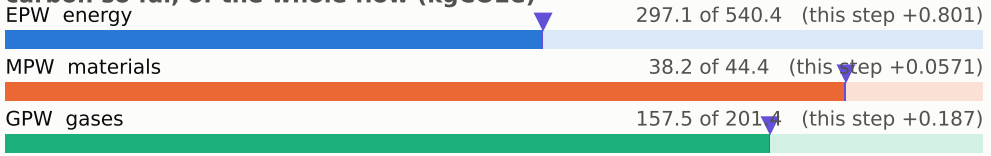


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

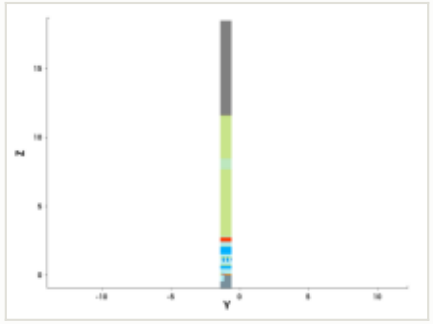


y cut at -1.035 µm

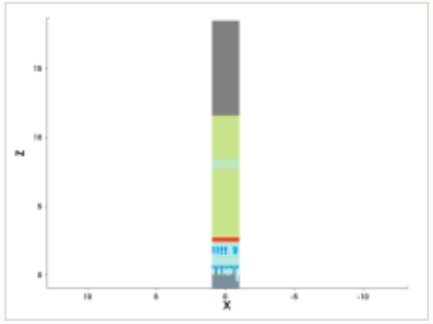

mask for this step

no mask for this step


steps by process area

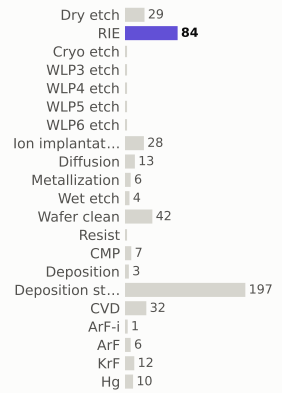

materials deposited (g)



gases emitted (g)

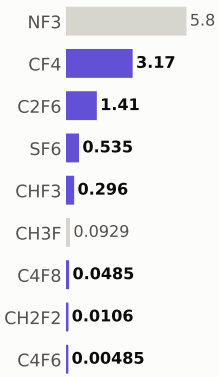


Step #6830: RIE


etch_anisotropic · RIE

1.04	493.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

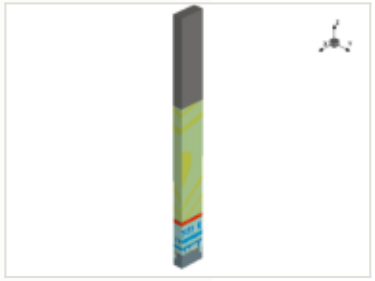

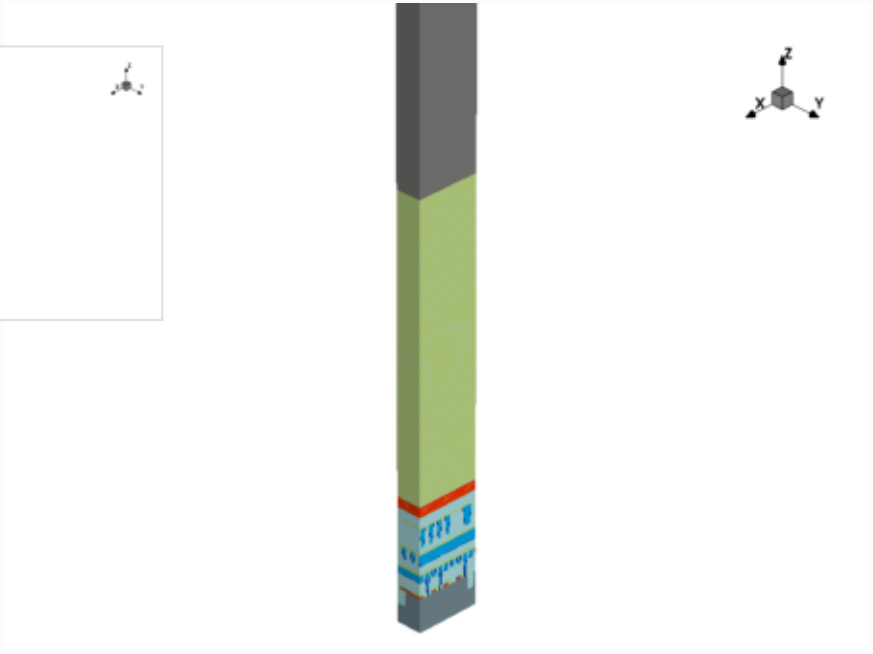


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

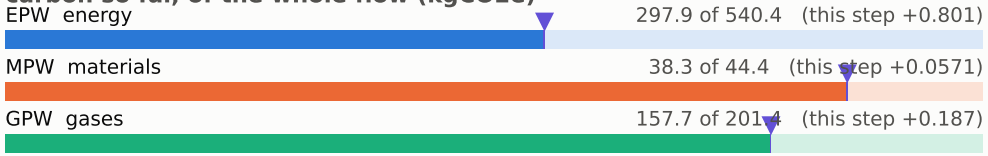


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

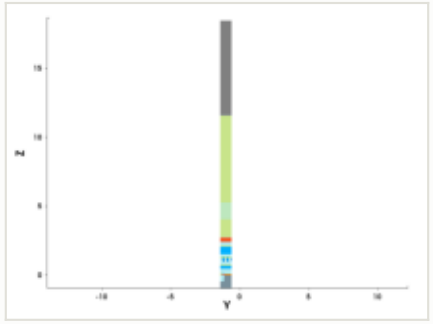


y cut at -1.035 µm

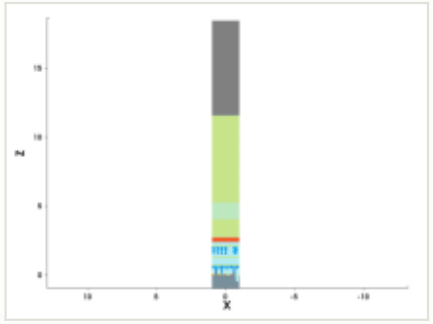


mask for this step

no mask for this step


steps by process area

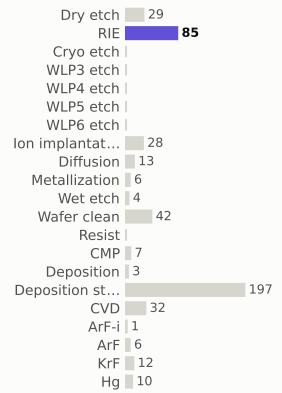

materials deposited (g)

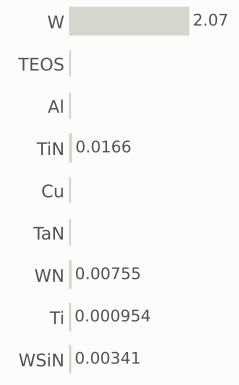

gases emitted (g)




Step #6840: RIE


etch_anisotropic · RIE

1.04	494.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

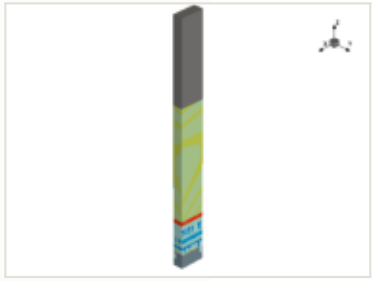

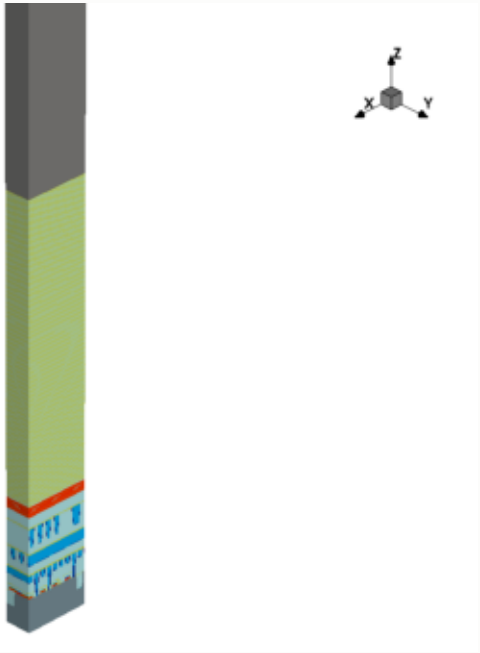


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

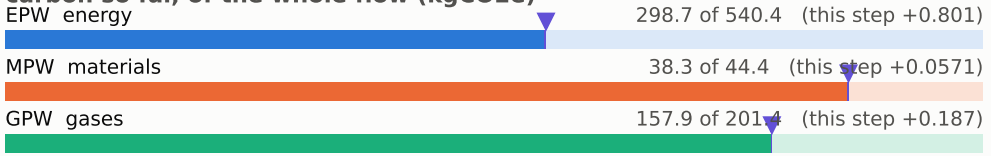


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

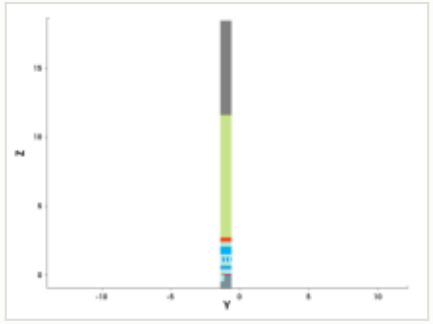


y cut at -1.035 µm

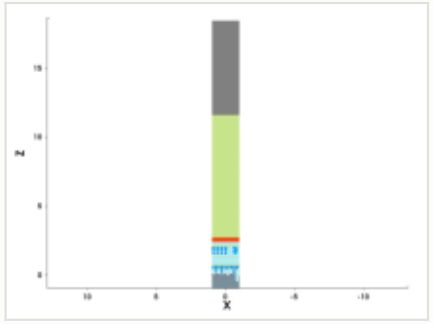

mask for this step

no mask for this step


steps by process area

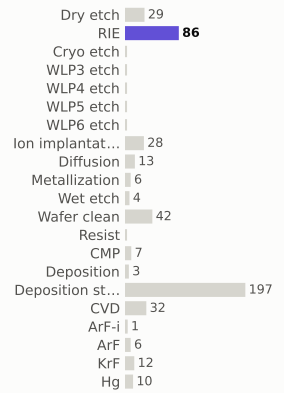

materials deposited (g)



gases emitted (g)

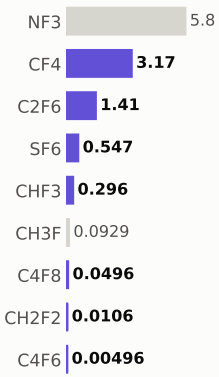


Step #6850: RIE


etch_anisotropic · RIE

1.04	496.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

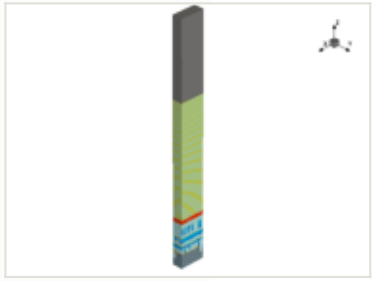

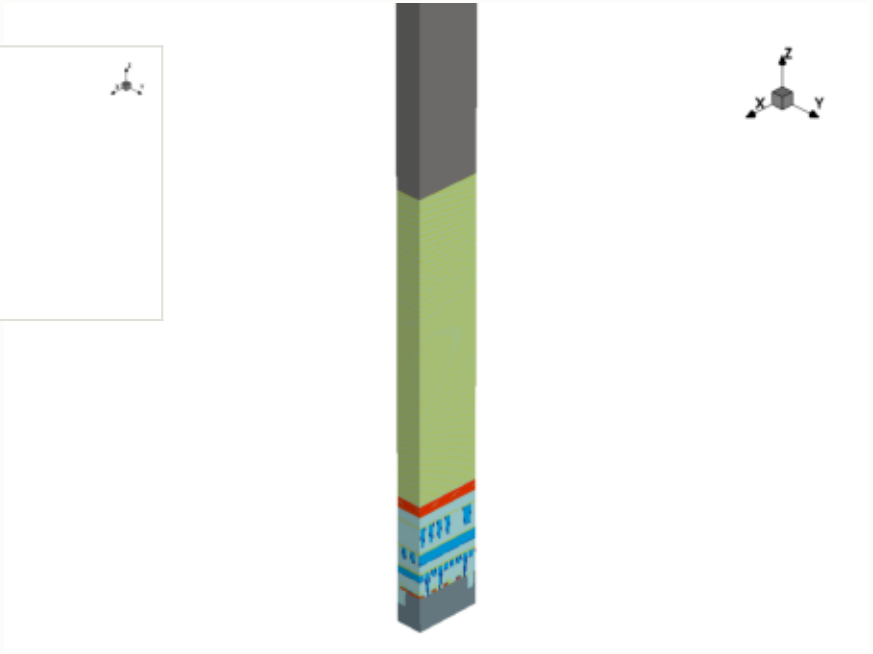


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

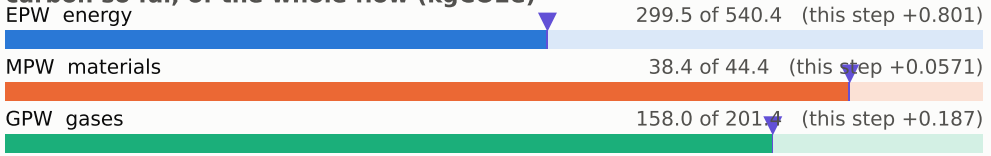


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

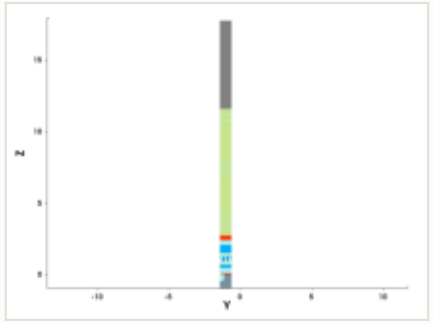


y cut at -1.035 µm

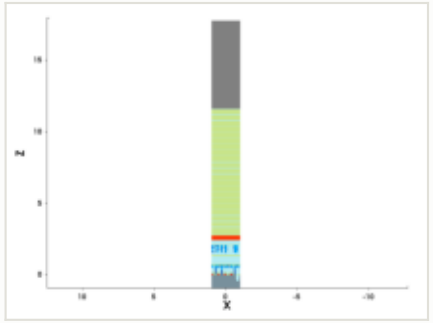


mask for this step

no mask for this step


steps by process area

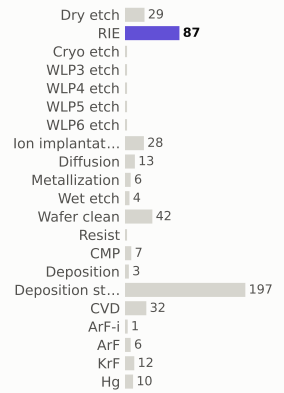

materials deposited (g)

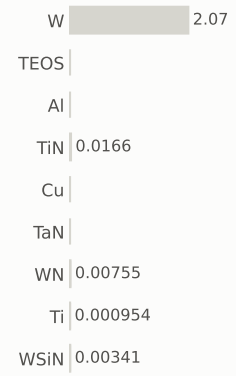

gases emitted (g)

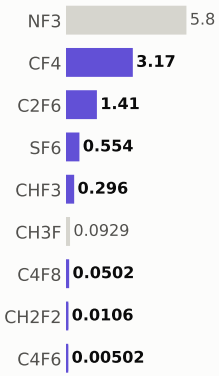


Step #6860: RIE


etch_anisotropic · RIE

1.04	497.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

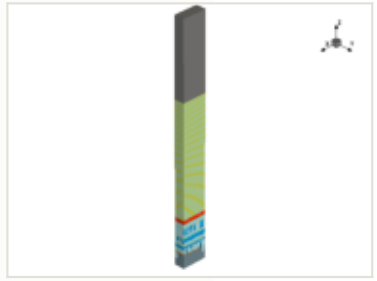

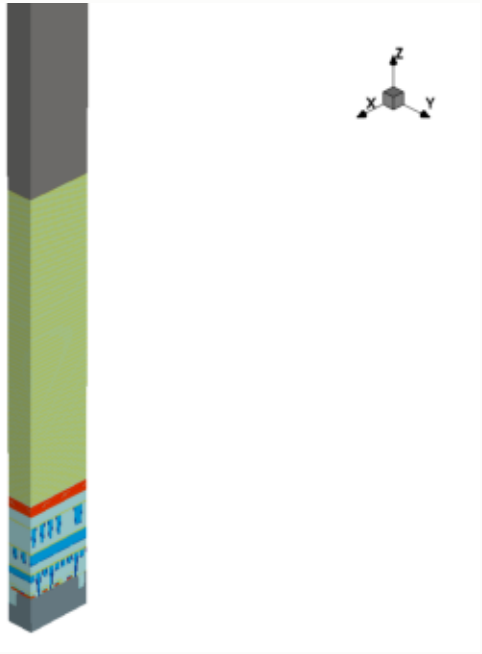


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

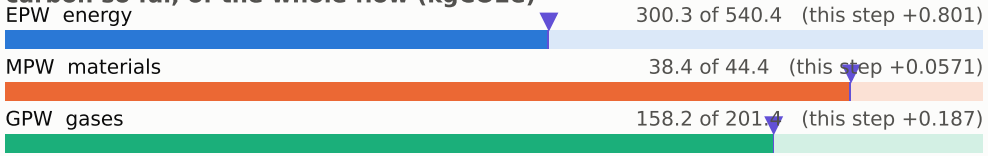


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

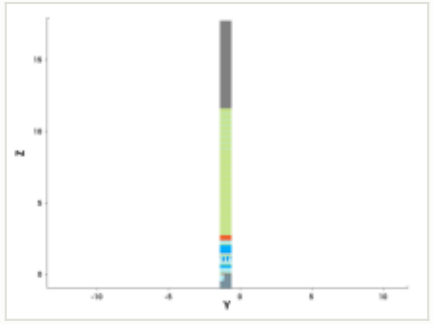


y cut at -1.035 µm

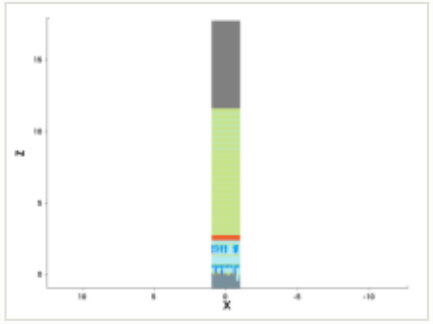

mask for this step

no mask for this step


steps by process area

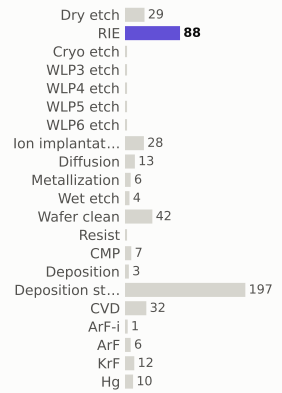

materials deposited (g)



gases emitted (g)

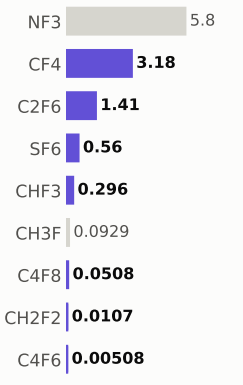


Step #6870: RIE


etch_anisotropic · RIE

1.04	498.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

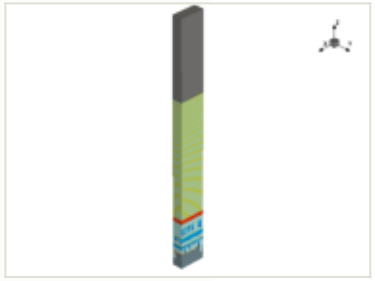

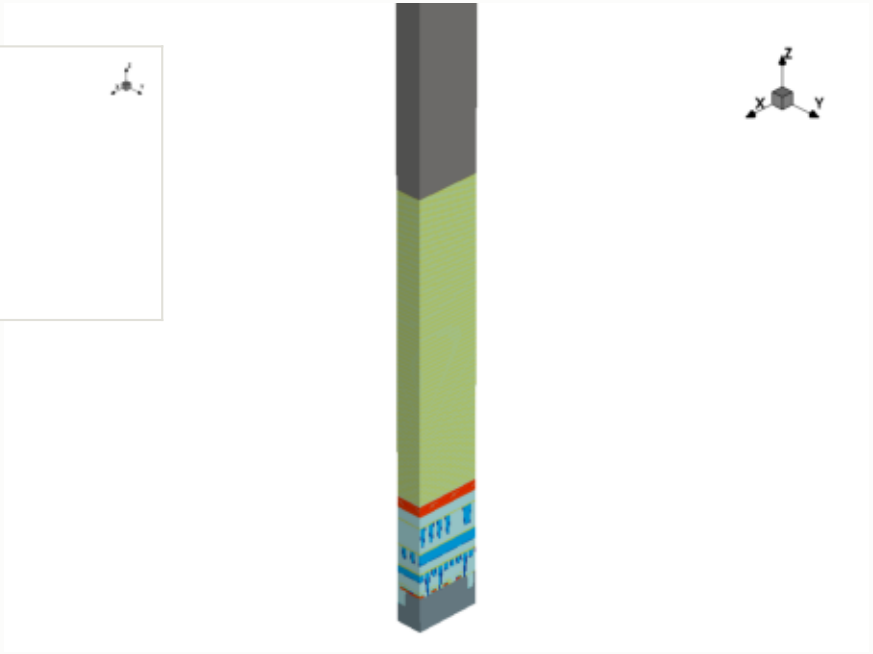


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

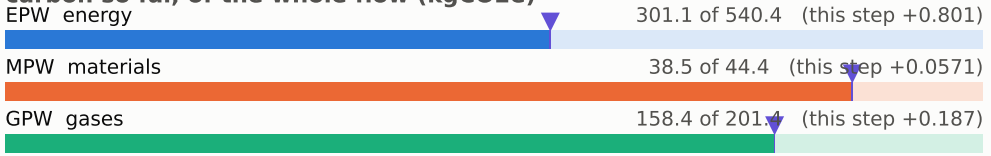


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

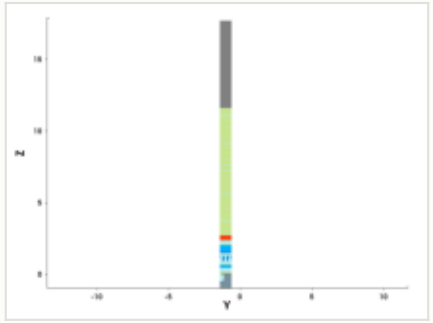


y cut at -1.035 µm

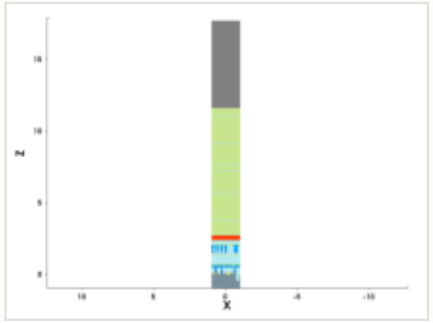

mask for this step

no mask for this step


steps by process area

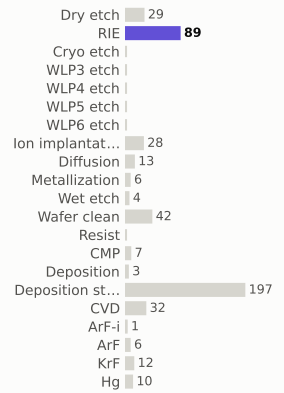

materials deposited (g)



gases emitted (g)

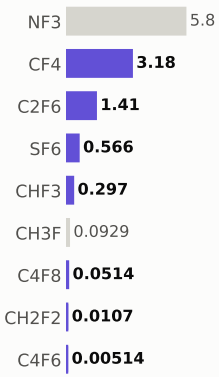


Step #6880: RIE


etch_anisotropic · RIE

1.04	499.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

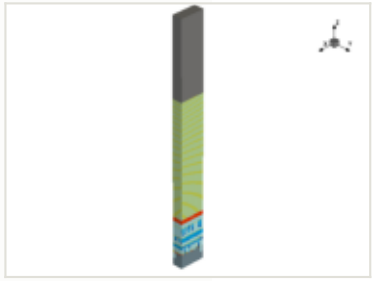

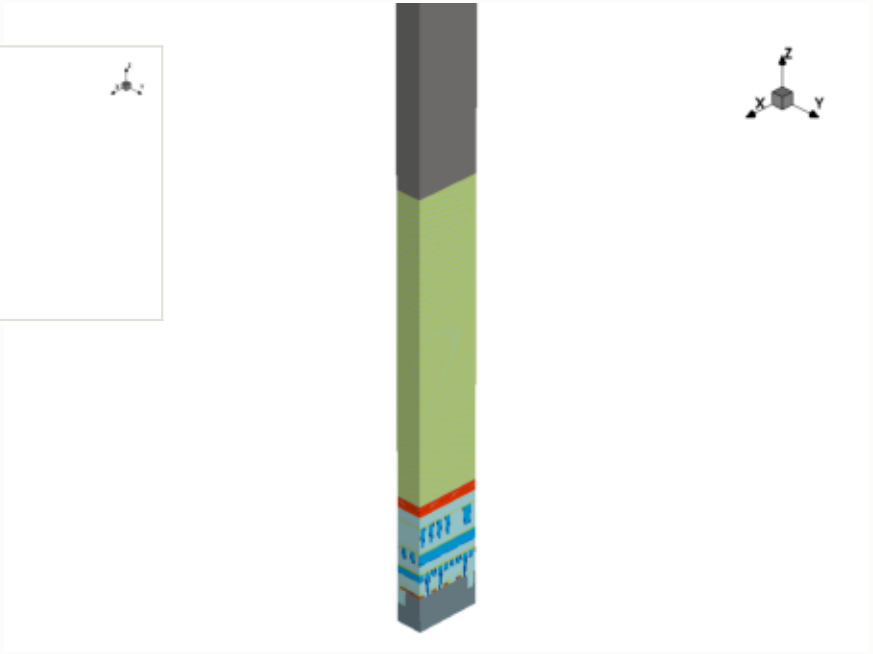


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

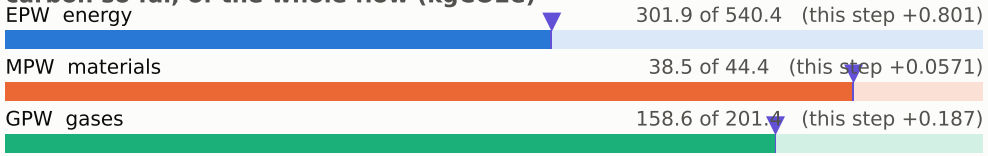


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

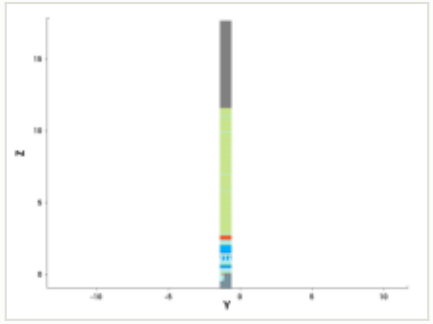


y cut at -1.035 µm

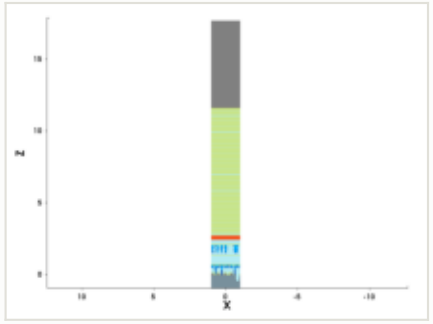

mask for this step

no mask for this step


steps by process area

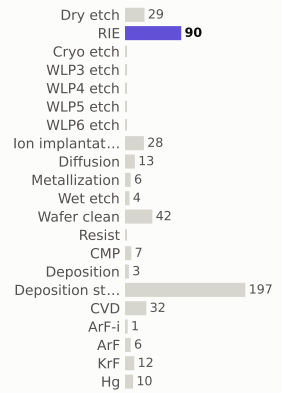

materials deposited (g)



gases emitted (g)



Step #6890: Dry_etch


etch_strip · Dry_etch

0.801	499.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



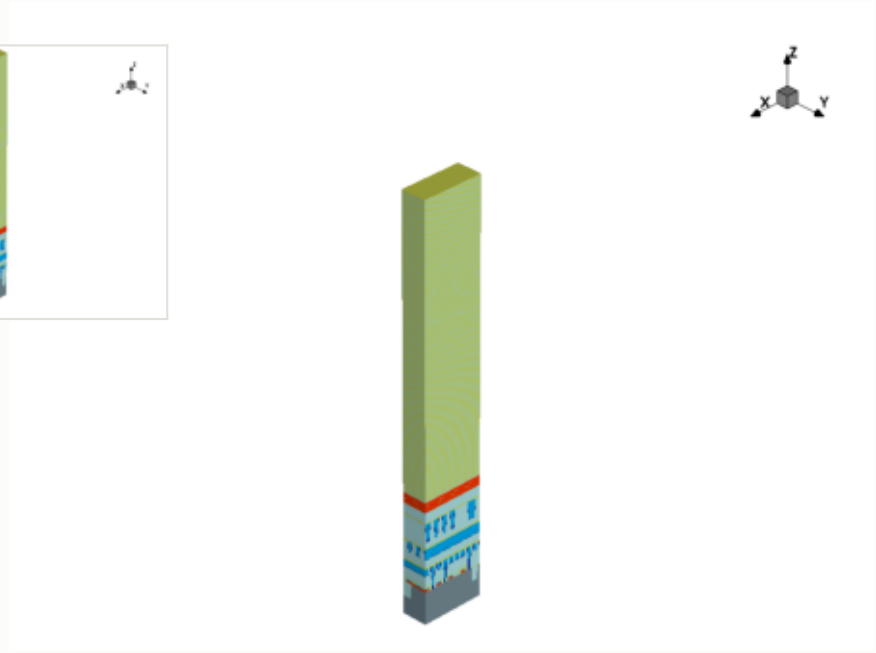


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

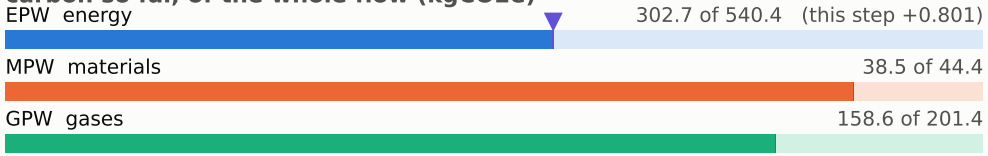


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

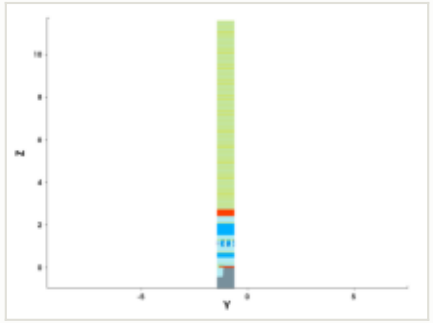


y cut at -1.035 µm

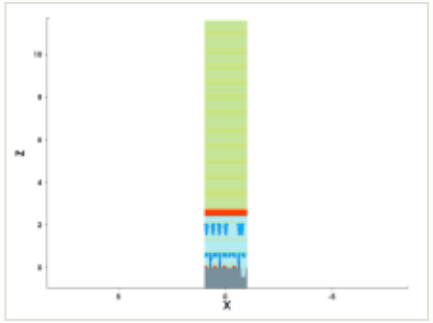


mask for this step

no mask for this step


steps by process area

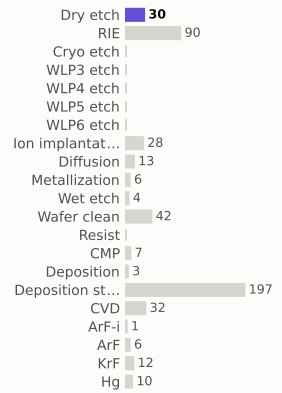

materials deposited (g)

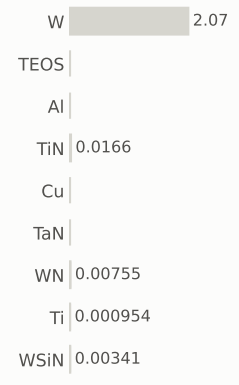

gases emitted (g)

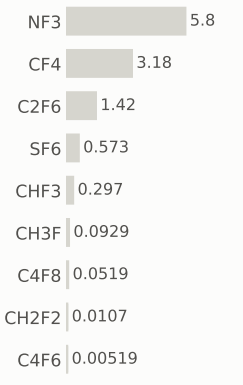

Step #6900: Wafer_clean


clean · Wafer_clean

0.169	500.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




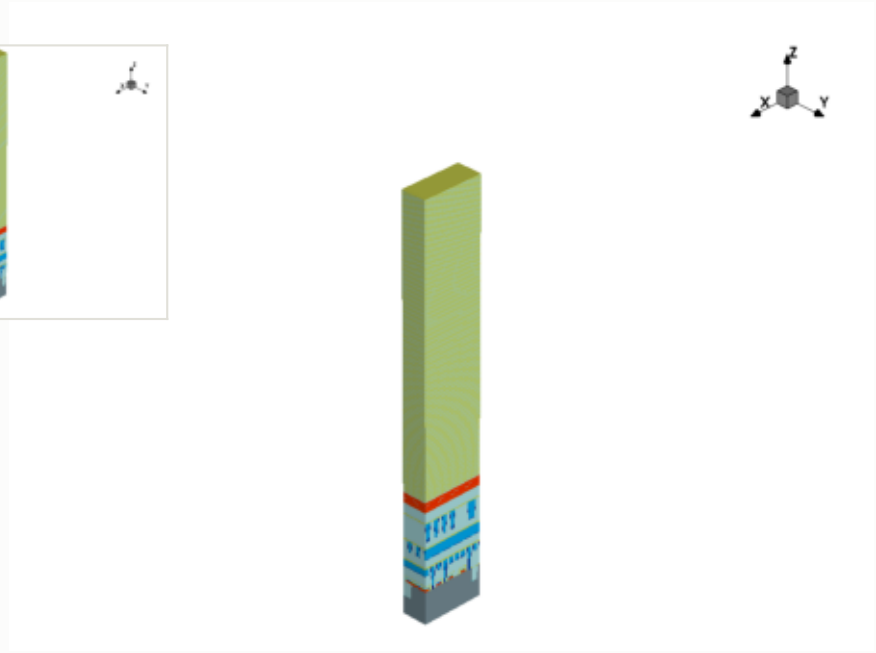

x cut at 0.000 µm

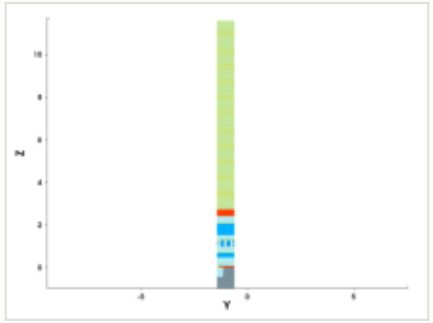

y cut at -1.035 µm

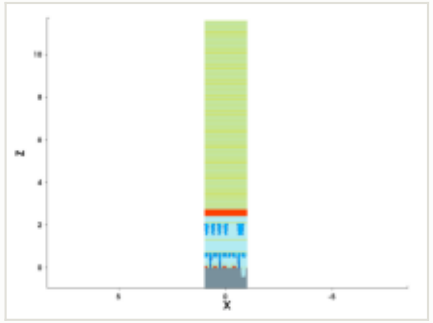

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

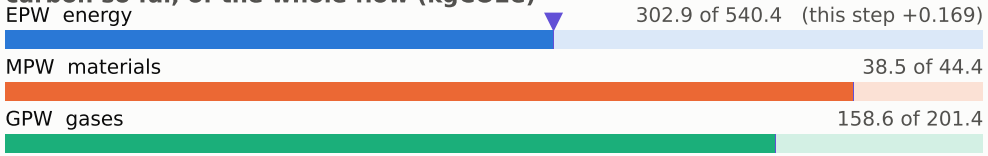


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

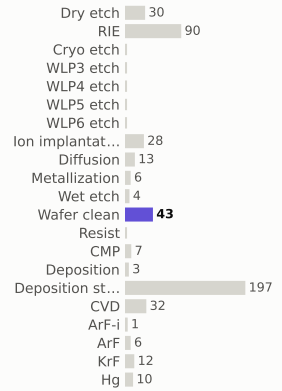

materials deposited (g)

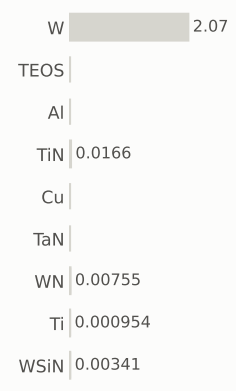

gases emitted (g)

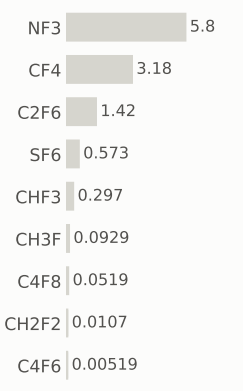


Step #6910: KrF


litho_patterning · KrF

0.199	500.3	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

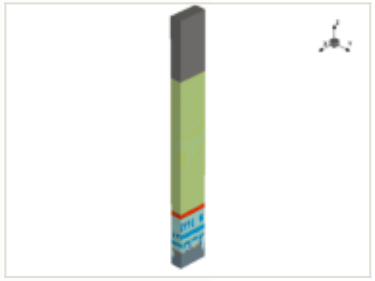

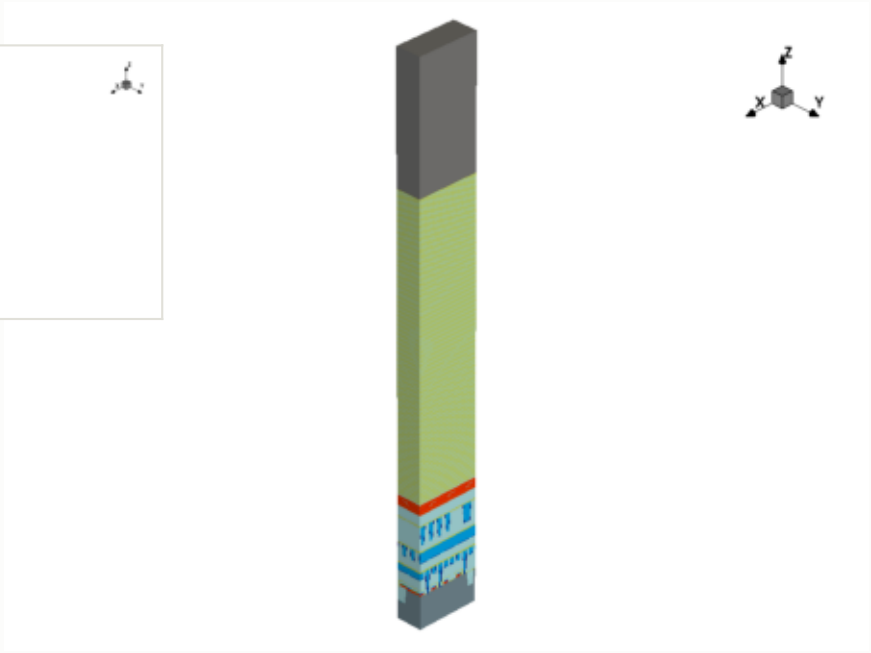


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

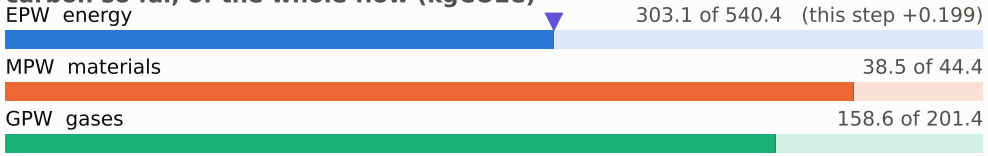


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

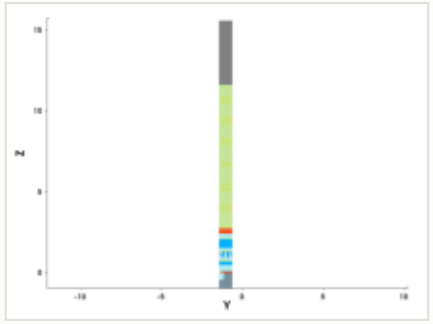


y cut at -1.035 µm

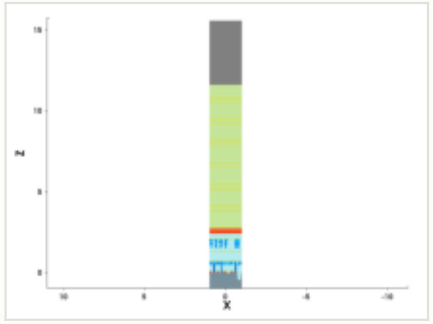

mask: layer 31:0, positive (OASIS)




steps by process area

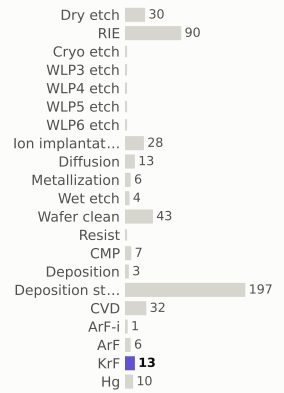

materials deposited (g)



gases emitted (g)

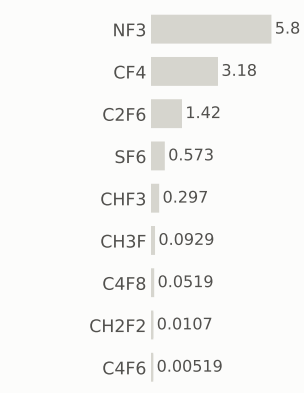


Step #6920: WLP3_etch


etch_anisotropic · WLP3_etch

4.19	504.5	0.53%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

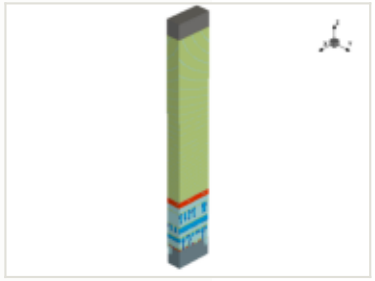

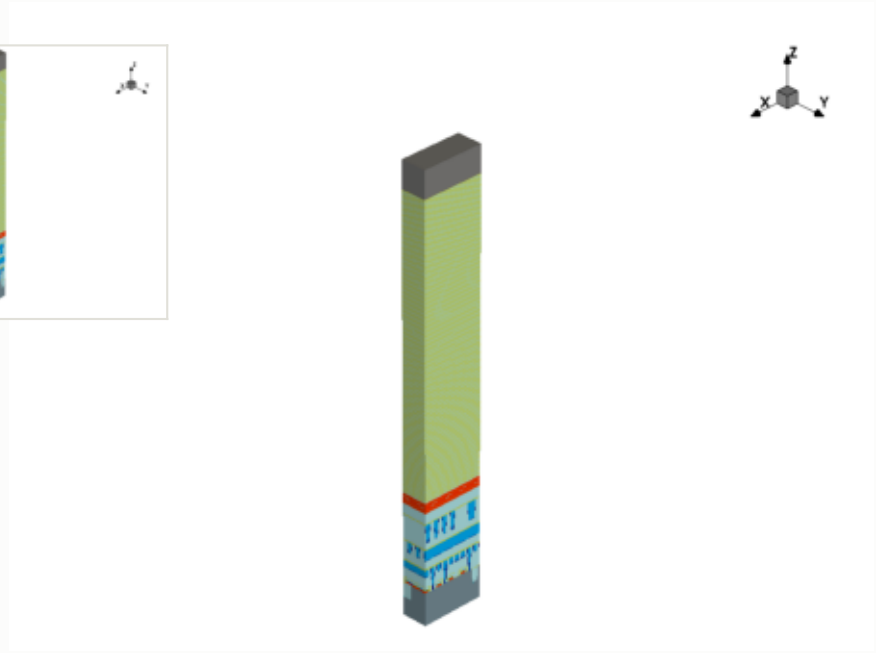


this step


process area	WLP3_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

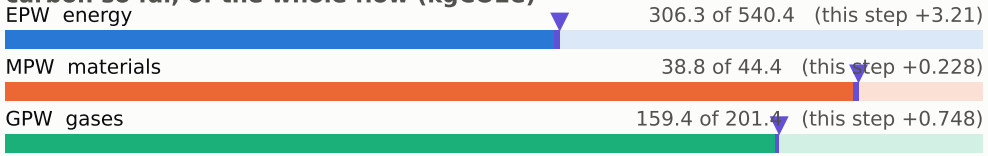


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

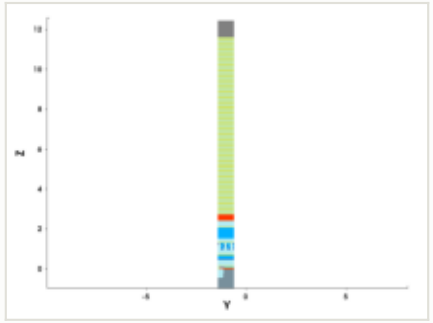


y cut at -1.035 µm

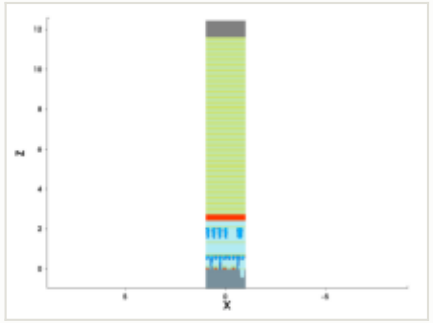


mask for this step

no mask for this step


steps by process area

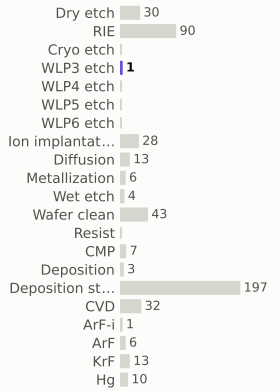

materials deposited (g)

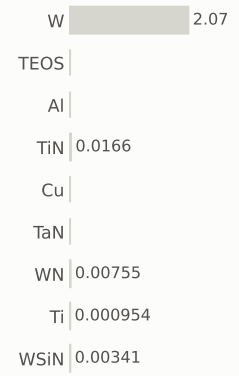

gases emitted (g)




Step #6930: WLP3_etch


etch_anisotropic · WLP3_etch

4.19	508.6	0.53%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

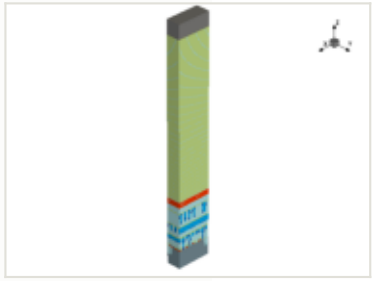

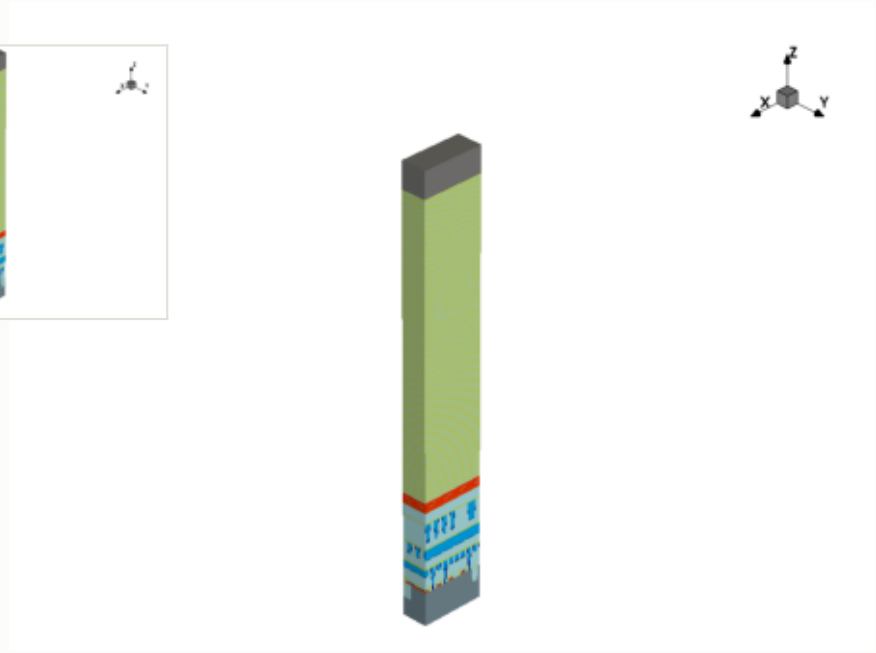


this step

process area	WLP3_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

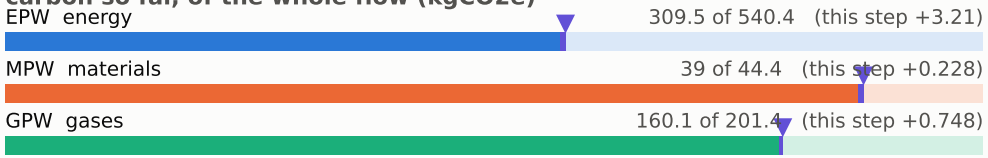


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

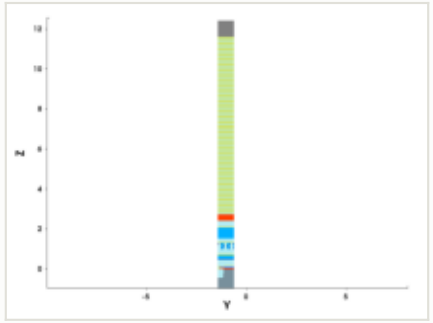


y cut at -1.035 µm

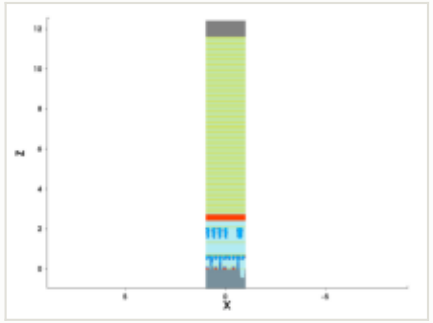


mask for this step

no mask for this step


steps by process area

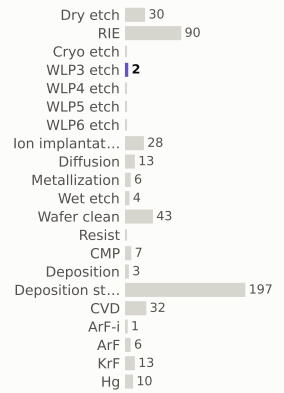

materials deposited (g)

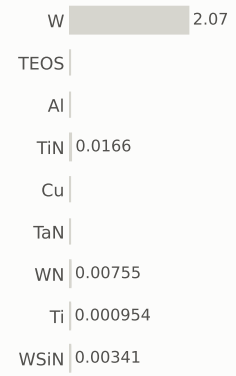

gases emitted (g)



Step #6940: Dry_etch


etch_strip · Dry_etch

0.801	509.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



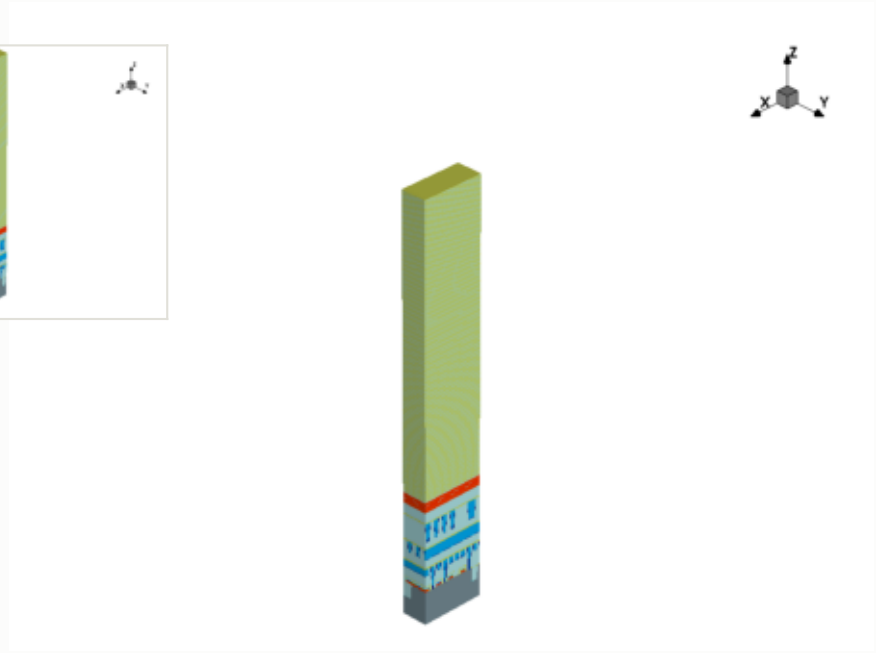


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

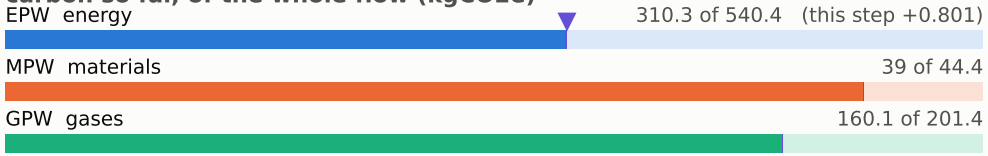


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

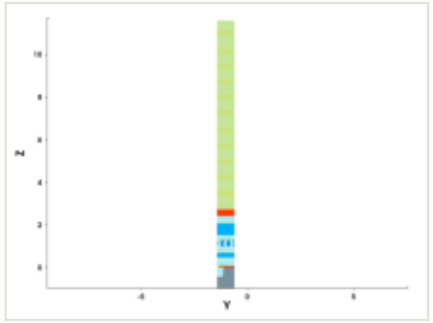


y cut at -1.035 µm

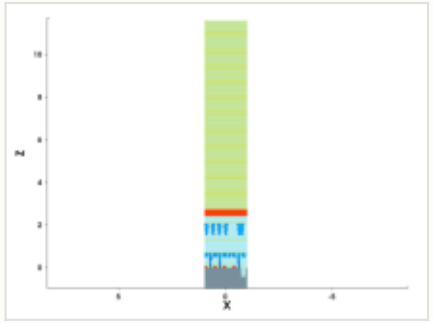


mask for this step

no mask for this step


steps by process area

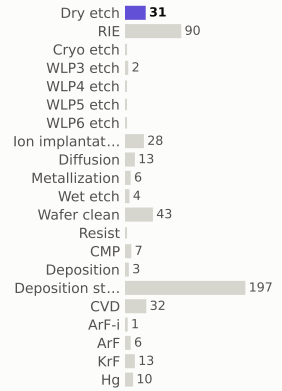

materials deposited (g)

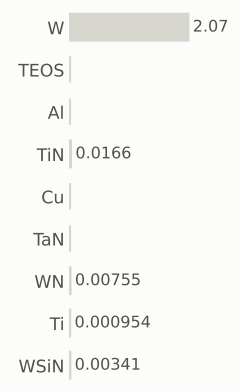

gases emitted (g)



Step #6950: Wafer_clean

clean · Wafer_clean

0.169	509.6	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

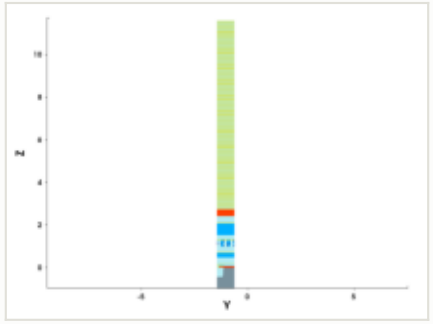

y cut at -1.035 µm

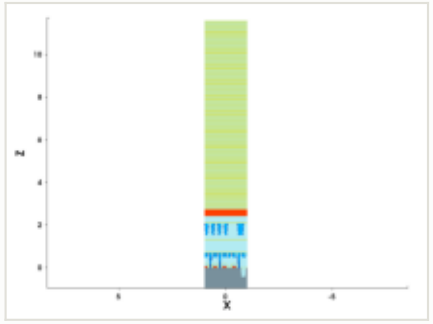

mask for this step


no mask for this step

this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

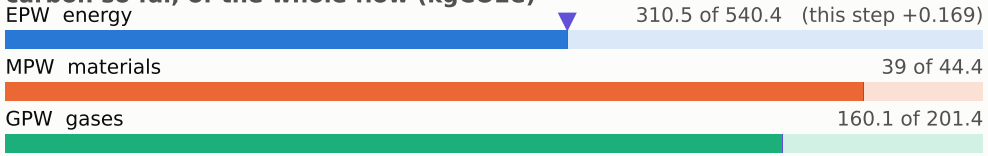

embodied carbon up to each step (kgCO2e per wafer)




steps by process area



materials deposited (g)



gases emitted (g)




Step #6960: KrF


litho_patterning · KrF

0.199	509.8	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

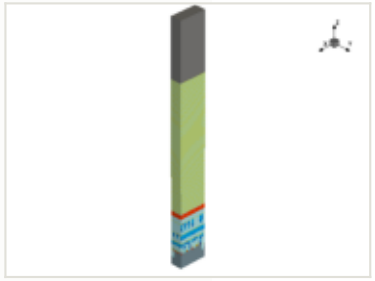

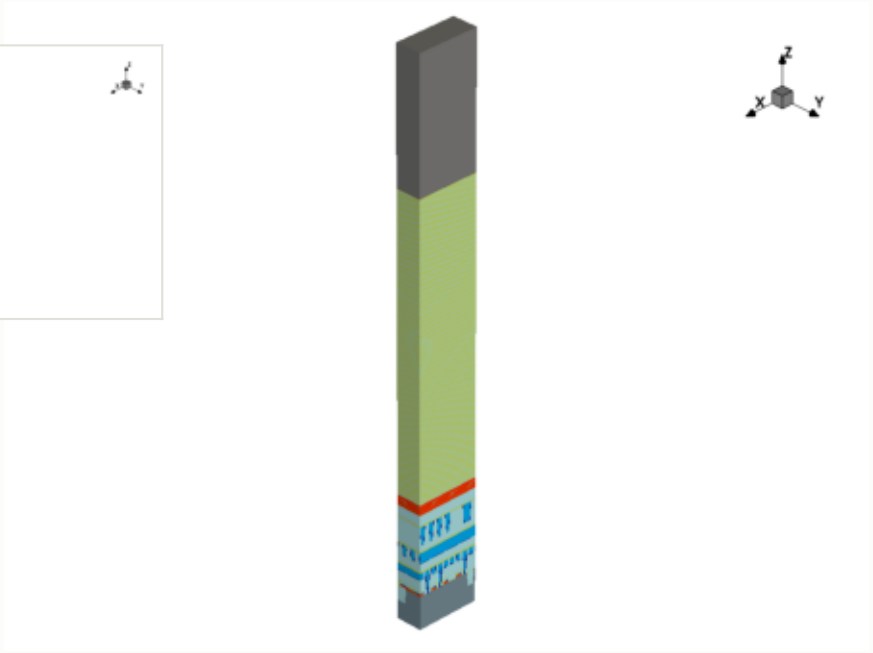


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

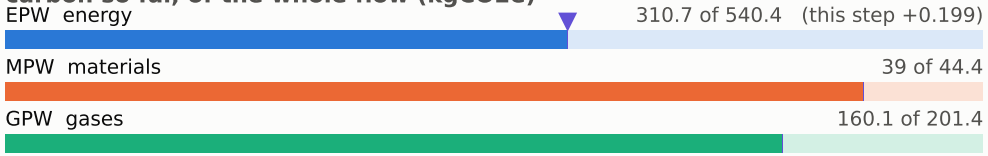


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

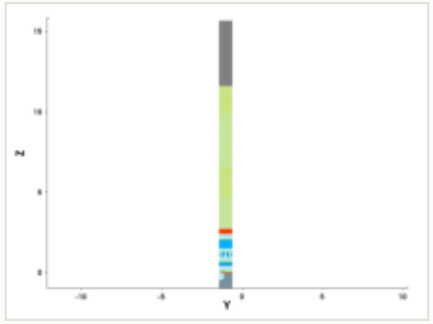


y cut at -1.035 µm

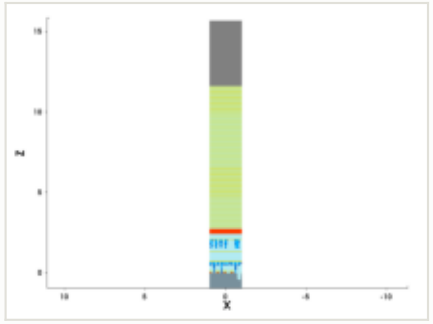


mask: layer 32:0, positive (OASIS)




steps by process area

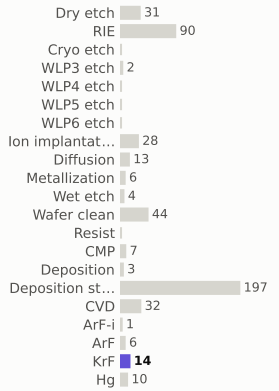

materials deposited (g)

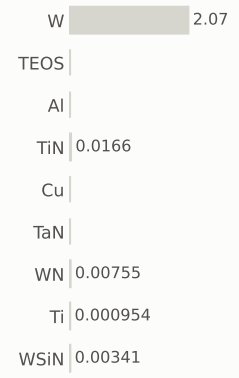

gases emitted (g)

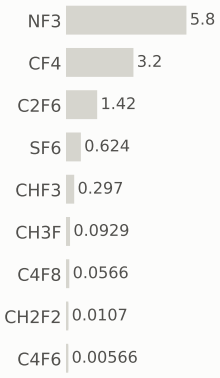


Step #6970: WLP4_etch


etch_anisotropic · WLP4_etch

4.19	514.0	0.53%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

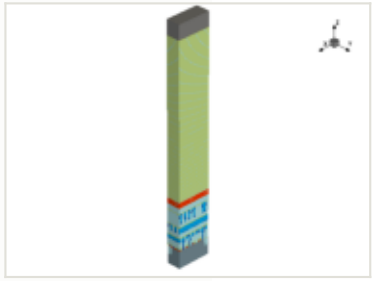

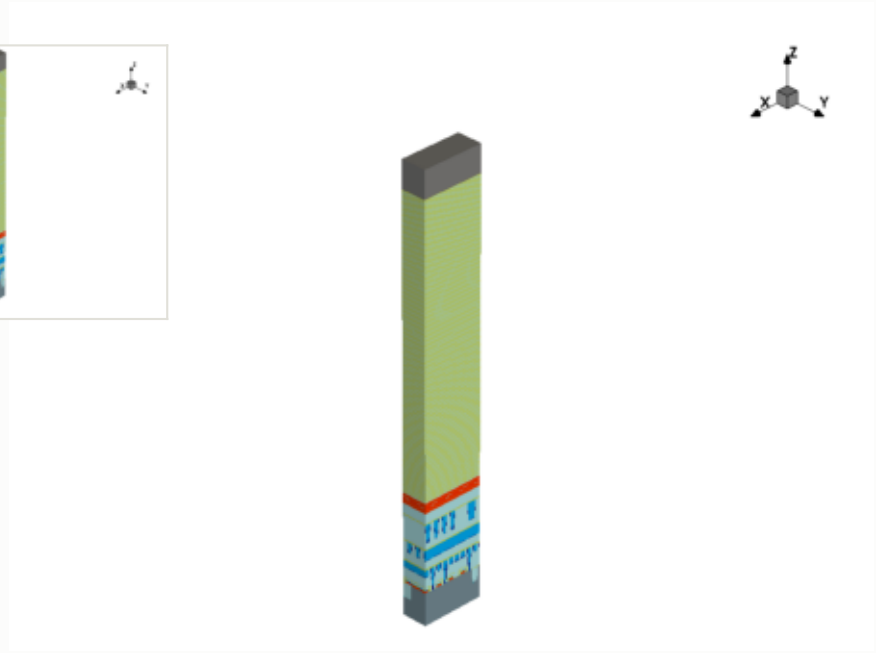


this step

process area	WLP4_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

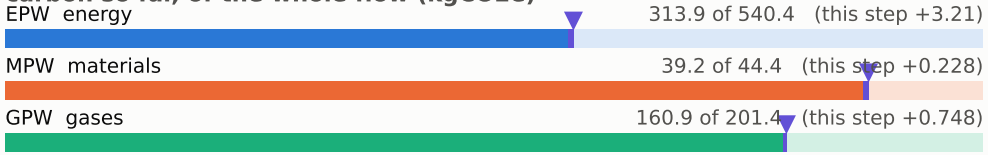


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

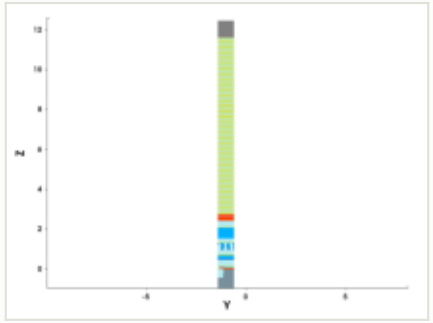


y cut at -1.035 µm

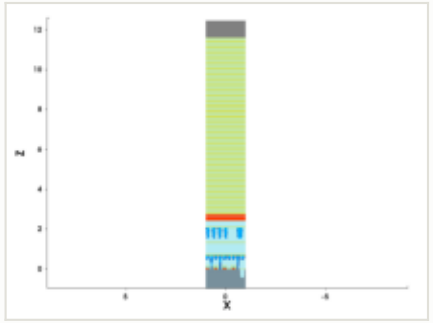

mask for this step

no mask for this step


steps by process area

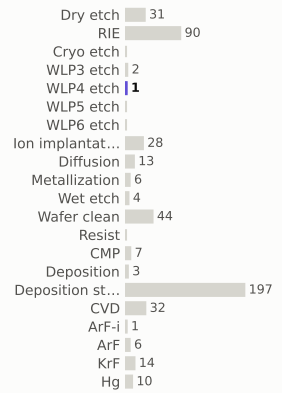

materials deposited (g)



gases emitted (g)




Step #6980: WLP4_etch


etch_anisotropic · WLP4_etch

4.19	518.2	0.53%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

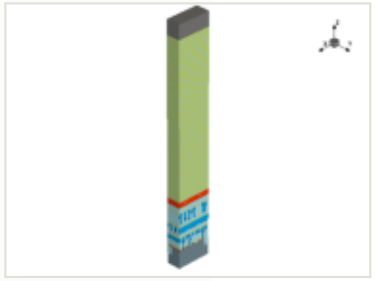


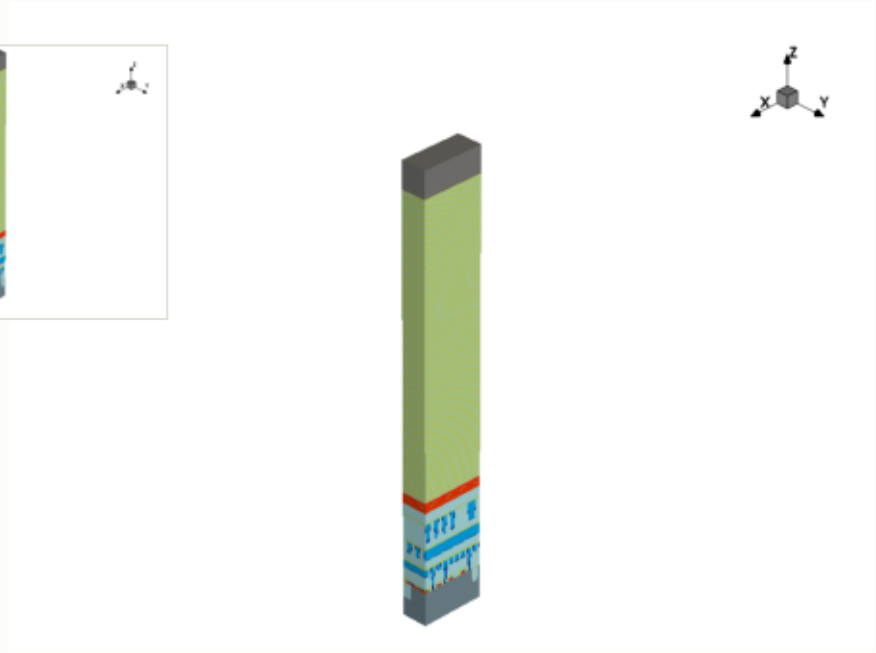

x cut at 0.000 µm

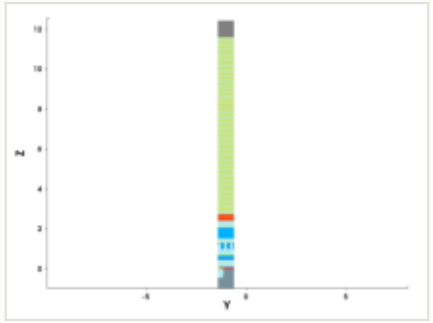

y cut at -1.035 µm

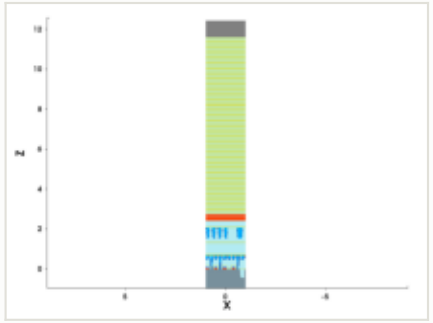

mask for this step


no mask for this step

this step


process area	WLP4_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.641 g, SF6 1.76 g
energy	5.33 kWh + 2.13 overhead

EPW	3.21 kgCO2e
EPW tool	2.29 kgCO2e
EPW overhead	0.917 kgCO2e
MPW	0.228 kgCO2e (gas 0.228)
GPW	0.748 kgCO2e
embodied carbon	**4.19 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

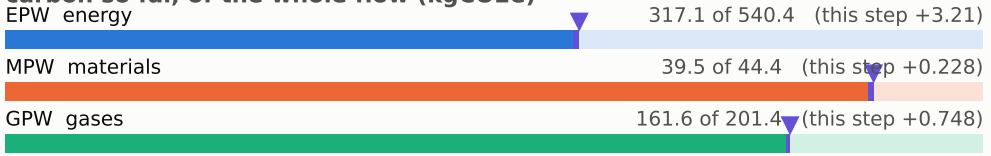

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

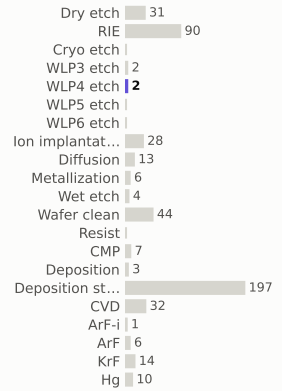

materials deposited (g)



gases emitted (g)

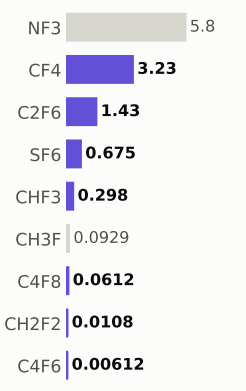

Step #6990: Dry_etch


etch_strip · Dry_etch

0.801	519.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



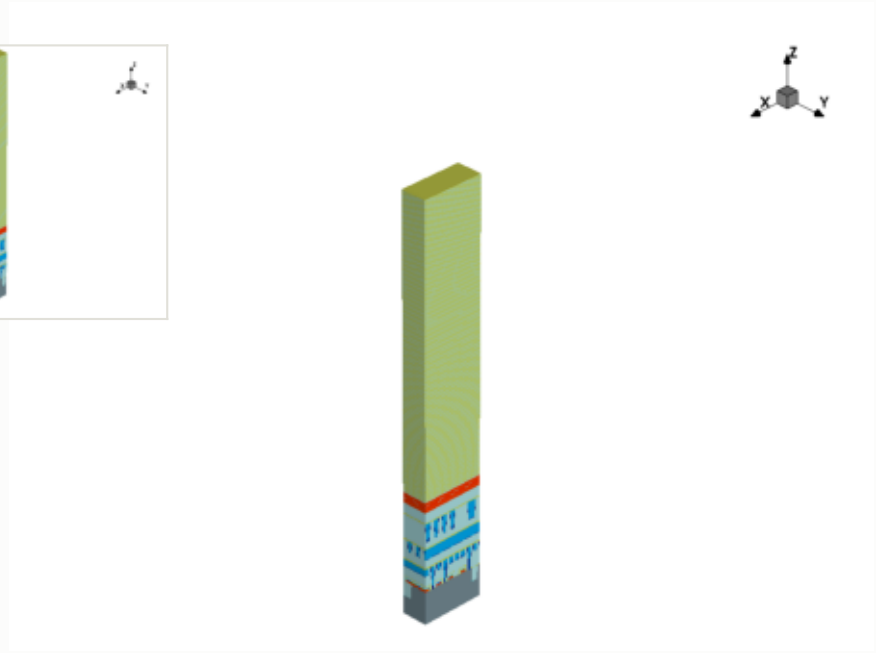


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

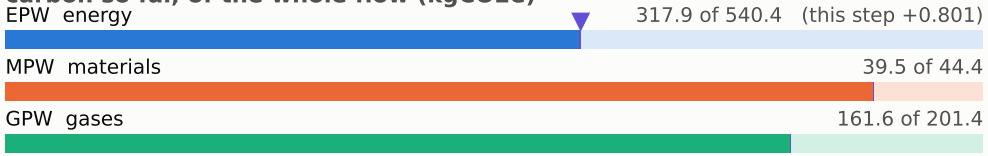


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

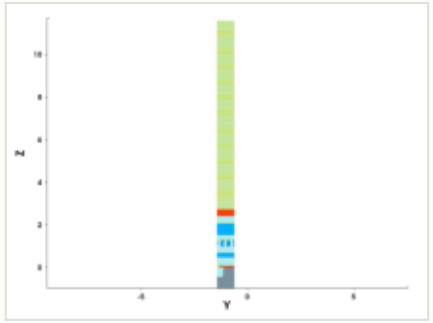


y cut at -1.035 µm

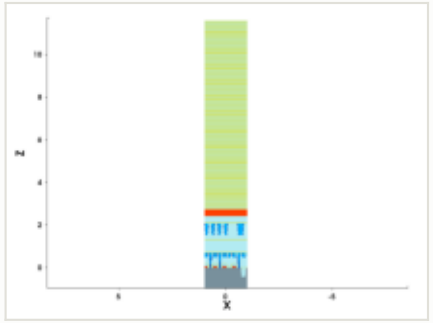


mask for this step

no mask for this step


steps by process area

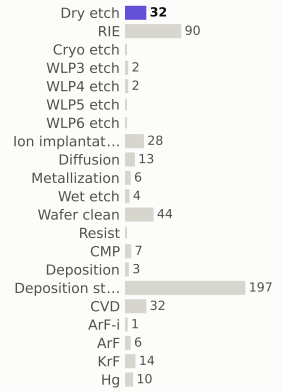

materials deposited (g)

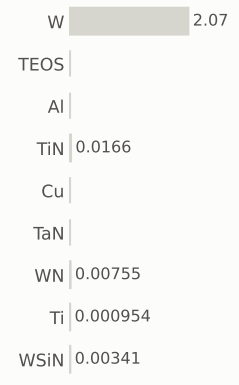

gases emitted (g)

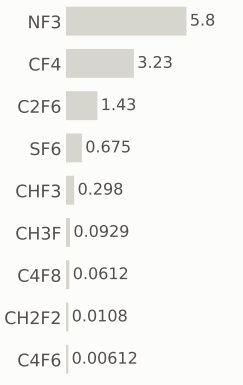

Step #7000: Wafer_clean

clean · Wafer_clean

0.169	519.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

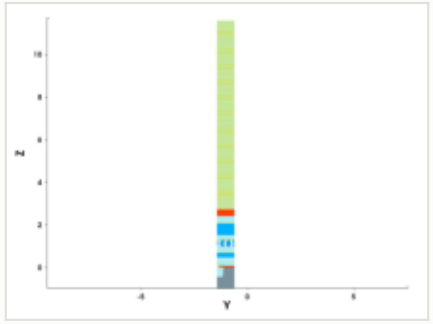

y cut at -1.035 µm

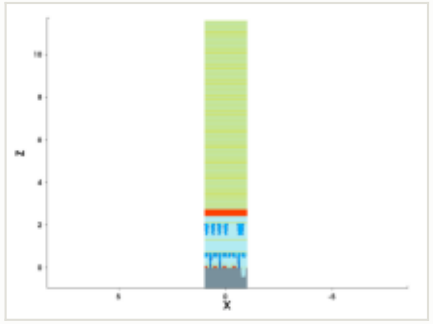

mask for this step

no mask for this step


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

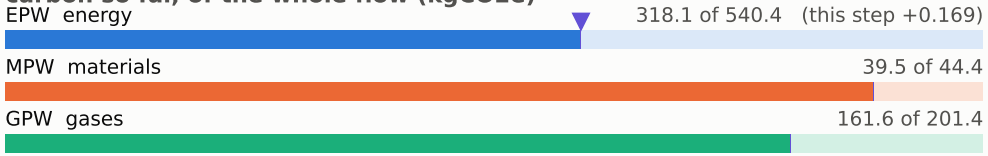


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

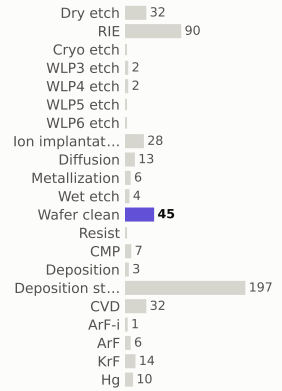

materials deposited (g)

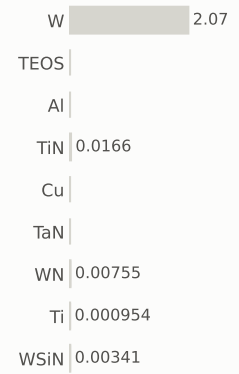

gases emitted (g)



Step #7010: KrF


litho_patterning · KrF

0.199	519.3	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




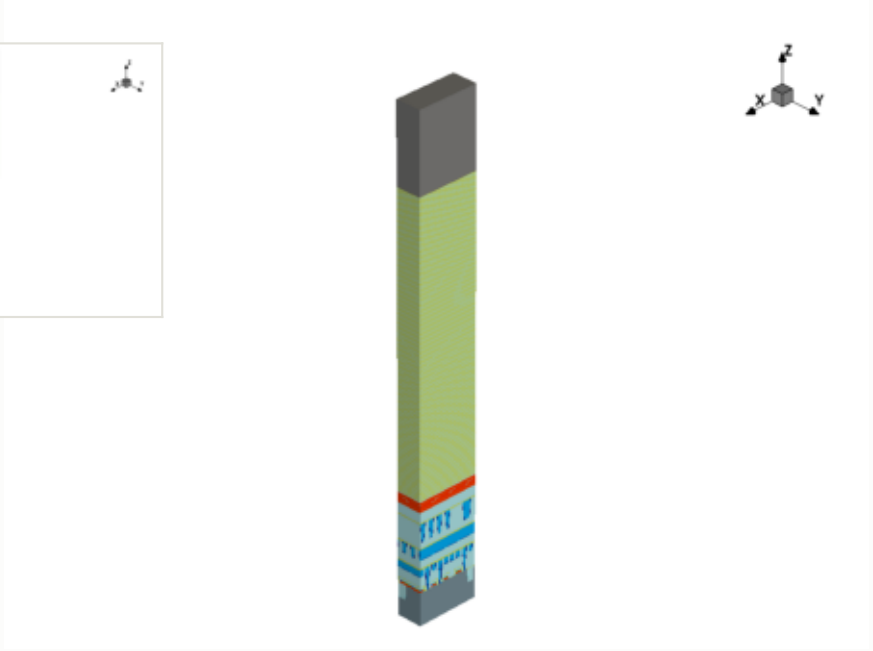

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

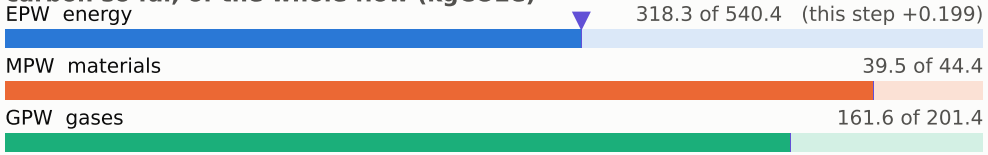


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

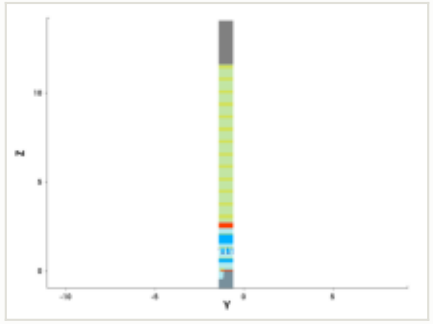


y cut at -1.035 µm

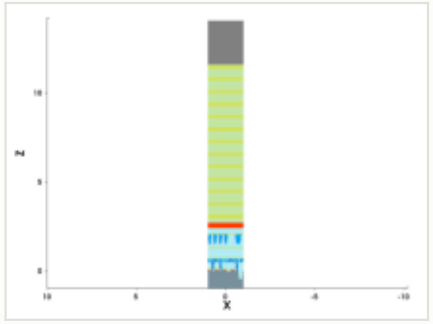

mask: layer 33:0, positive (OASIS)




steps by process area

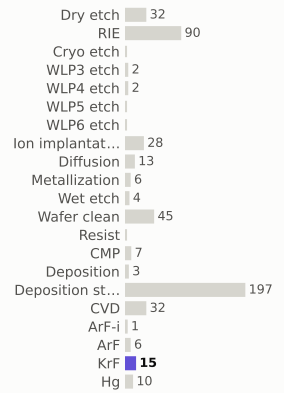

materials deposited (g)



gases emitted (g)

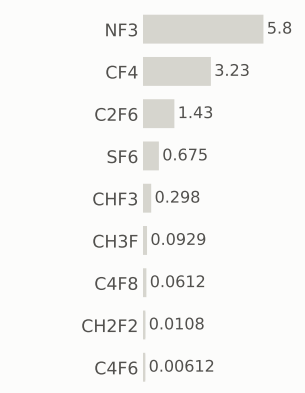


Step #7020: WLP5_etch


etch_anisotropic · WLP5_etch

2.1	521.4	0.27%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

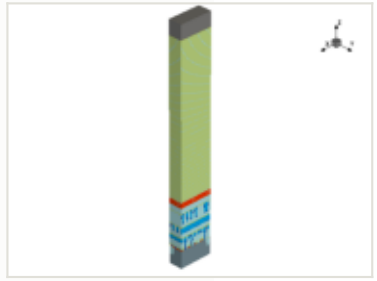

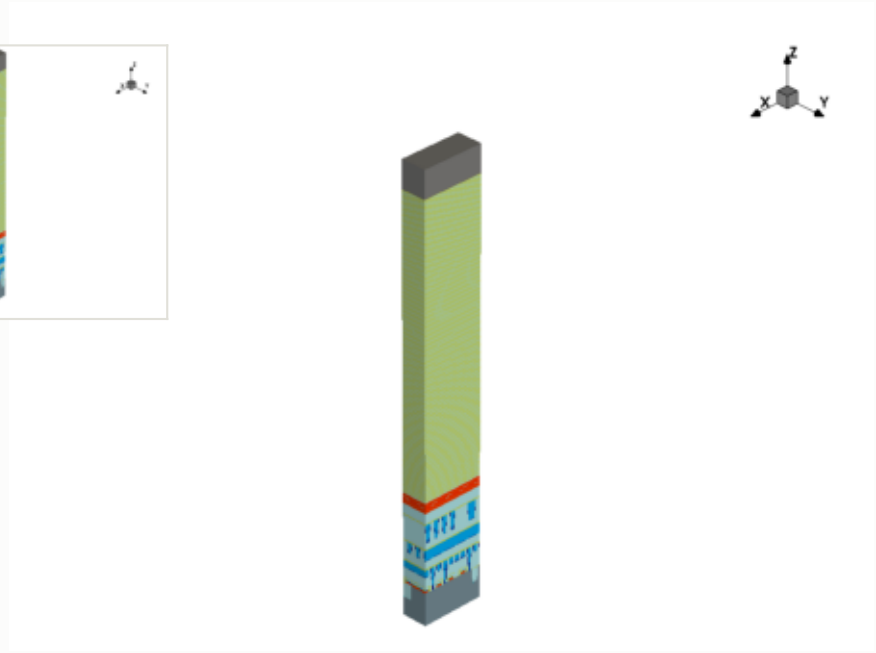


this step

process area	WLP5_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.321 g, SF6 0.878 g
energy	2.67 kWh + 1.07 overhead

EPW	1.61 kgCO2e
EPW tool	1.15 kgCO2e
EPW overhead	0.459 kgCO2e
MPW	0.114 kgCO2e (gas 0.114)
GPW	0.374 kgCO2e
embodied carbon	**2.1 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

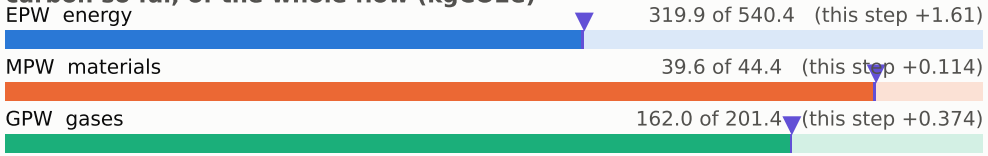


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

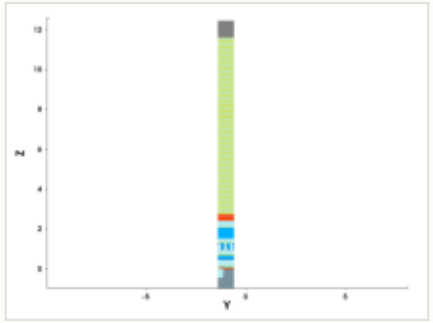


y cut at -1.035 µm

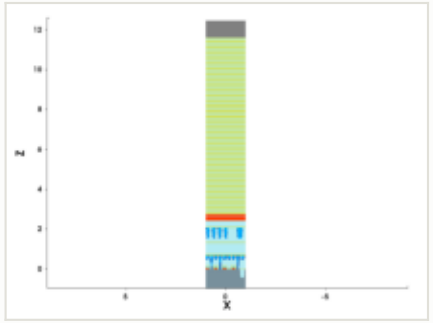

mask for this step

no mask for this step


steps by process area

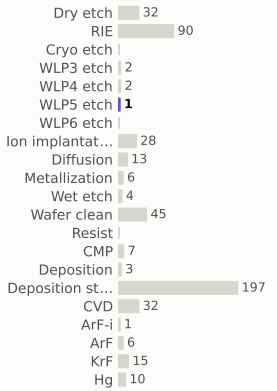

materials deposited (g)



gases emitted (g)




Step #7030: WLP5_etch


etch_anisotropic · WLP5_etch

2.1	523.5	0.27%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

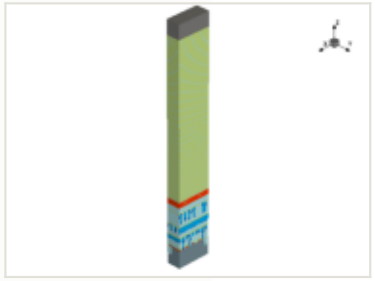


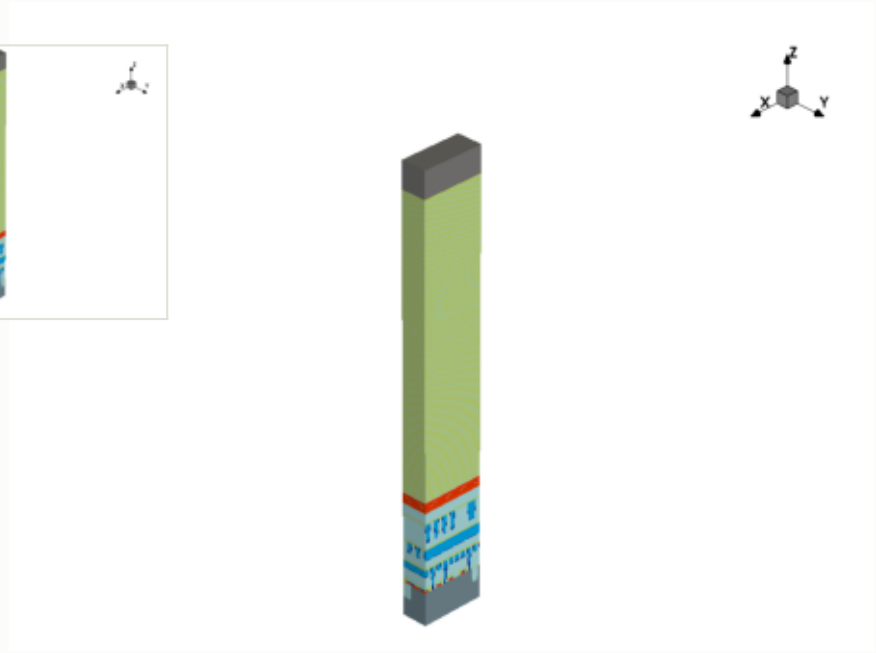

x cut at 0.000 µm

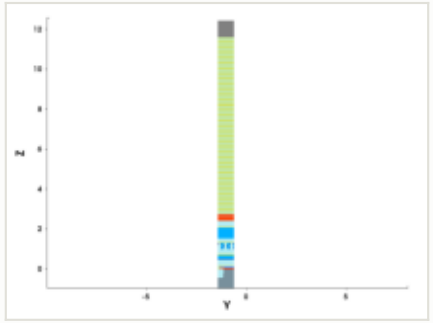

y cut at -1.035 µm

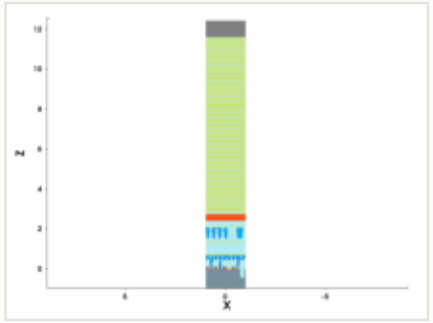

mask for this step


no mask for this step

this step


process area	WLP5_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.321 g, SF6 0.878 g
energy	2.67 kWh + 1.07 overhead

EPW	1.61 kgCO2e
EPW tool	1.15 kgCO2e
EPW overhead	0.459 kgCO2e
MPW	0.114 kgCO2e (gas 0.114)
GPW	0.374 kgCO2e
embodied carbon	**2.1 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

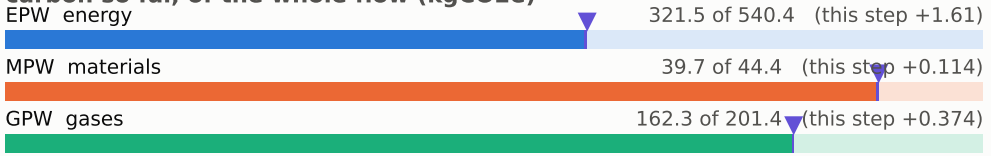

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

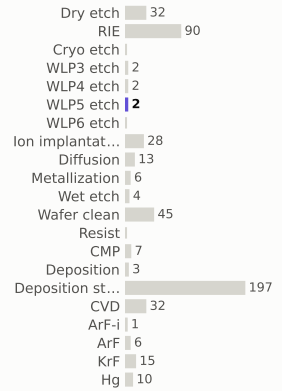

materials deposited (g)



gases emitted (g)

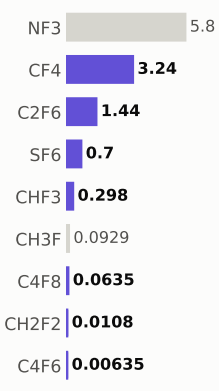

Step #7040: Dry_etch


etch_strip · Dry_etch

0.801	524.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



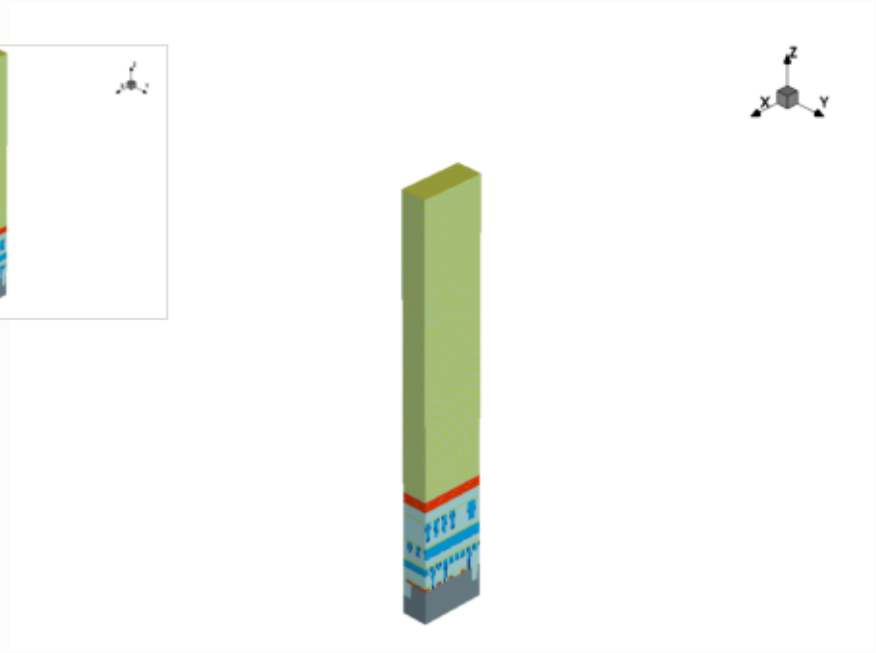


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

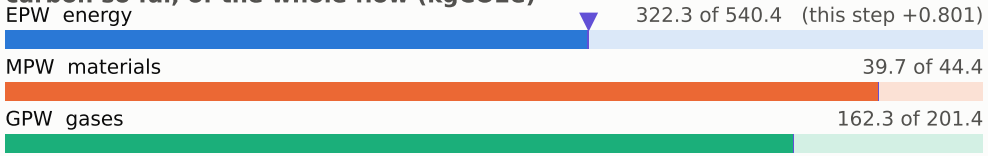


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

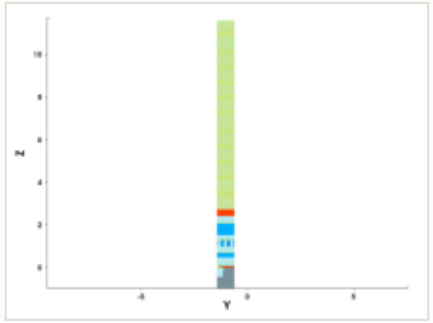


y cut at -1.035 µm

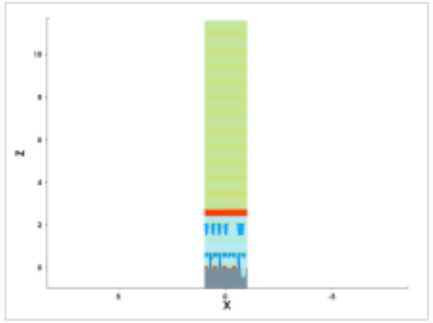


mask for this step

no mask for this step


steps by process area

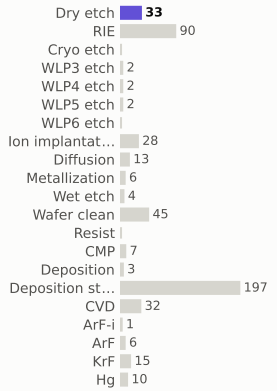

materials deposited (g)

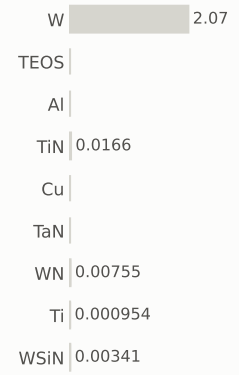

gases emitted (g)



Step #7050: Wafer_clean


clean · Wafer_clean

0.169	524.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




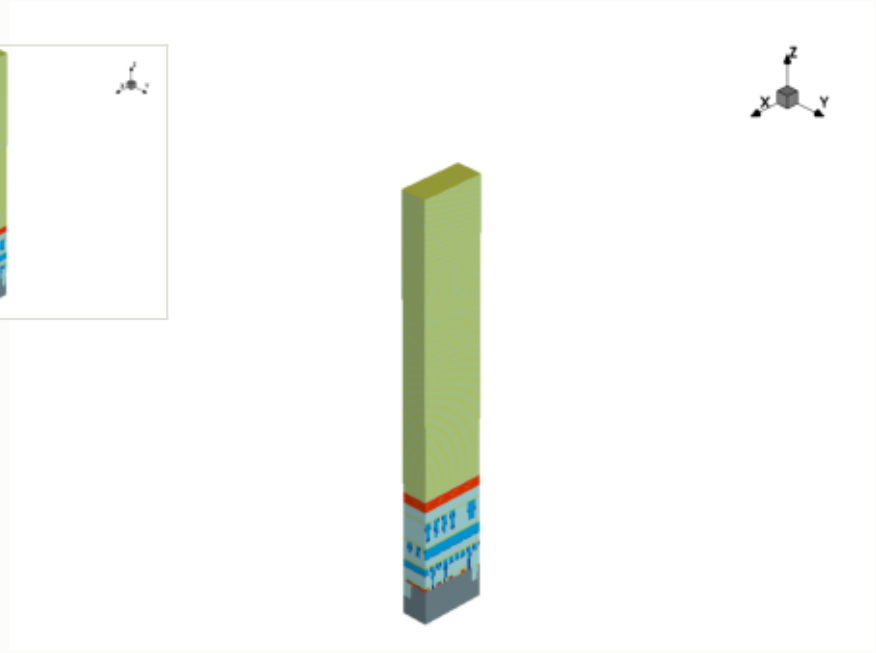

x cut at 0.000 µm

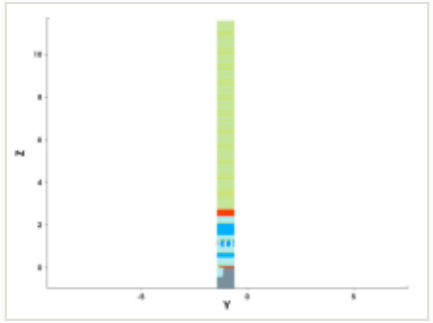

y cut at -1.035 µm

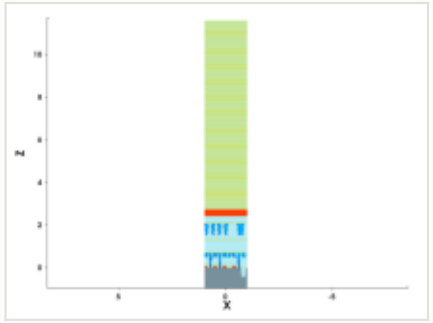

mask for this step

no mask for this step


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead


EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

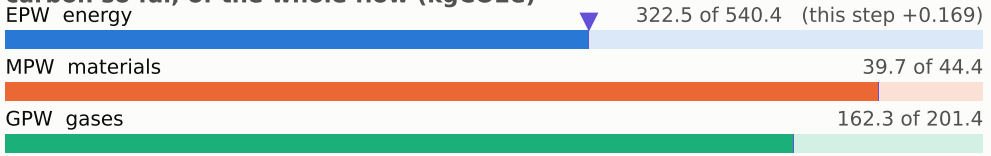


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

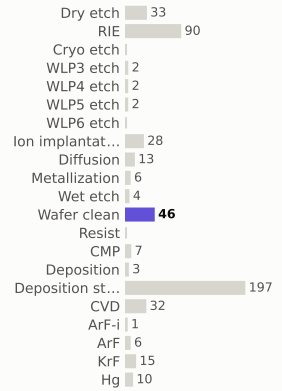

materials deposited (g)

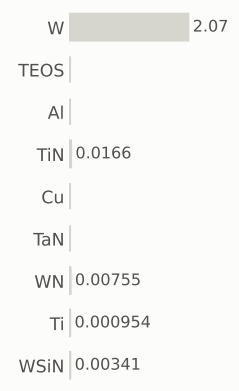

gases emitted (g)

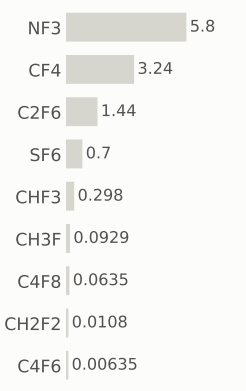


Step #7060: KrF


litho_patterning · KrF

0.199	524.7	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

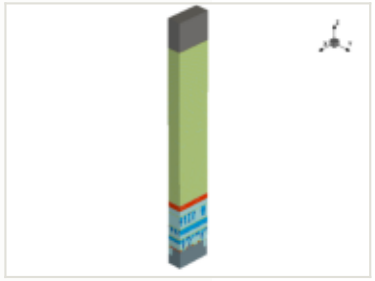


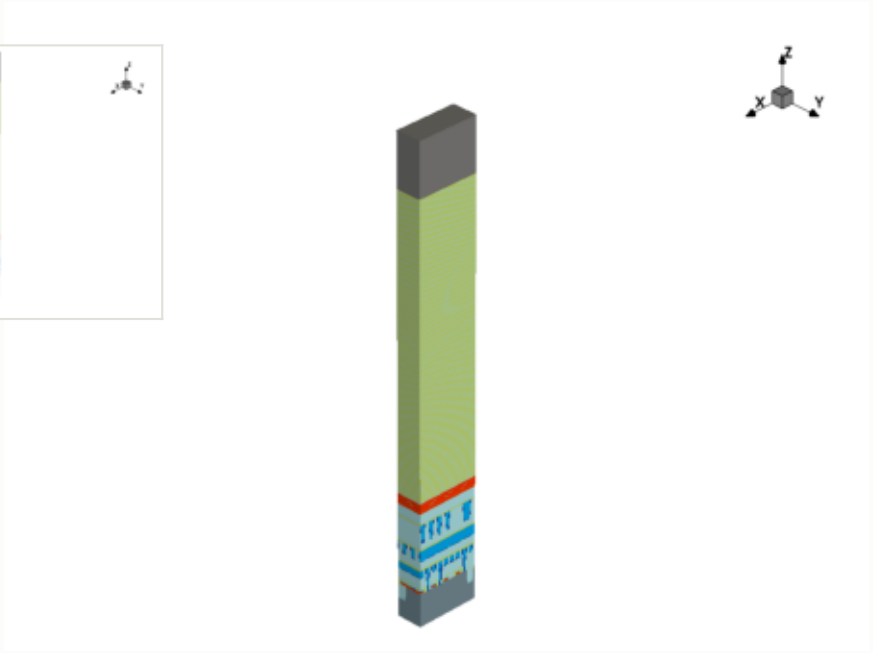


this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

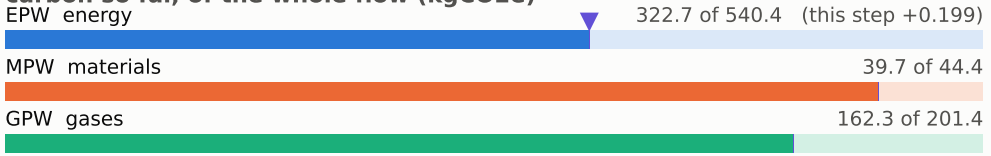


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

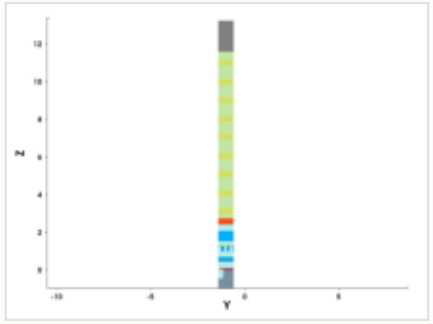


y cut at -1.035 µm

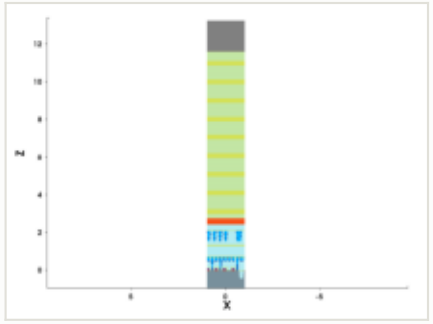


mask: layer 34:0, positive (OASIS)




steps by process area

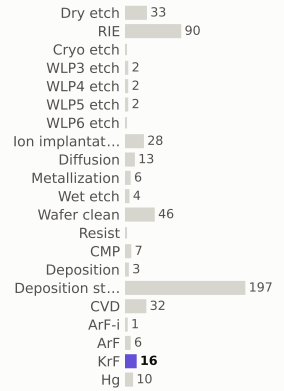

materials deposited (g)

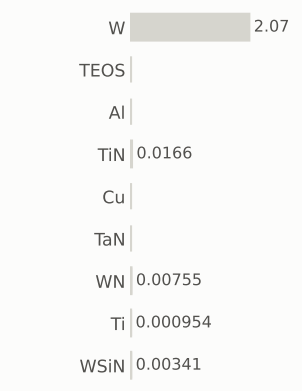

gases emitted (g)

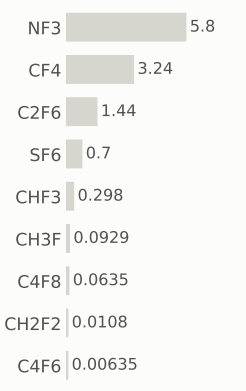


Step #7070: WLP6_etch


etch_anisotropic · WLP6_etch

1.04	525.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

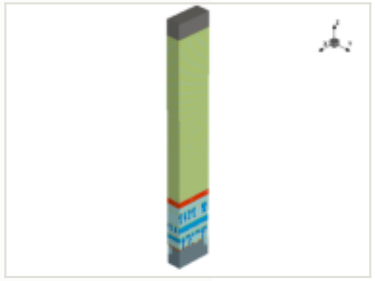


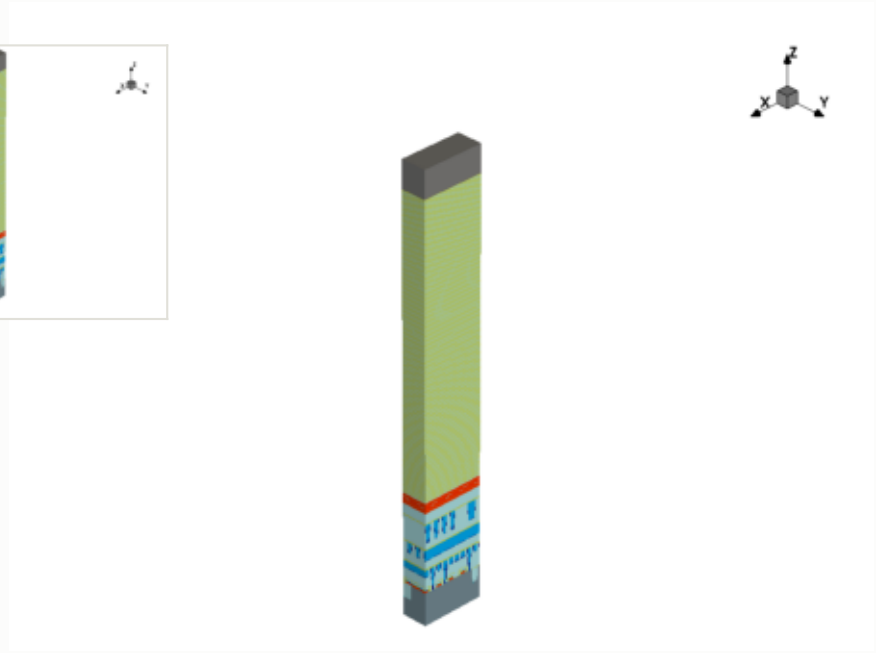

x cut at 0.000 µm

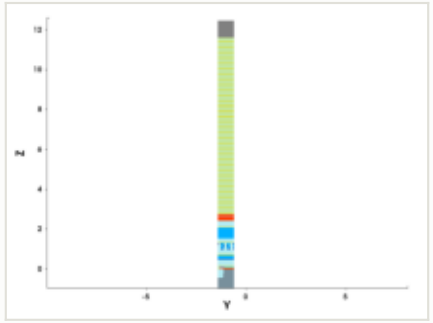

y cut at -1.035 µm

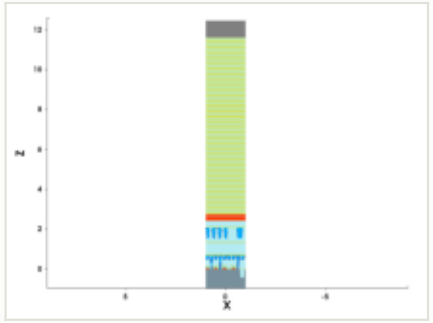


mask for this step

no mask for this step


this step

process area	WLP6_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0.0571 kgCO2e (gas 0.0571)
input gases	C4F8 0.16 g, SF6 0.439 g	GPW	0.187 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

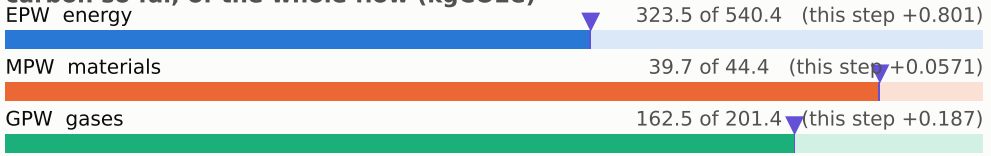


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

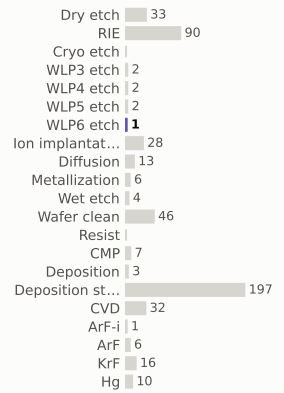

materials deposited (g)

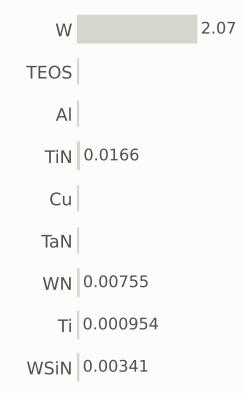

gases emitted (g)

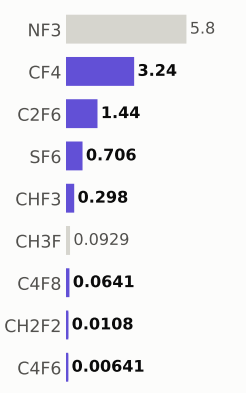


Step #7080: WLP6_etch

etch_anisotropic · WLP6_etch

1.04	526.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

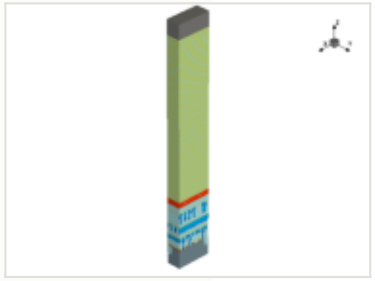




x cut at 0.000 µm

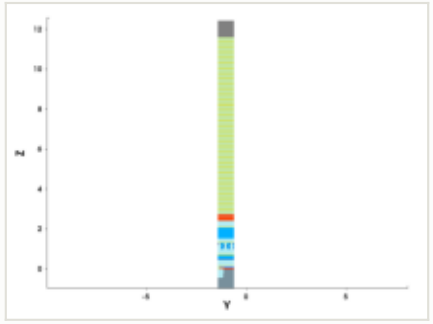

y cut at -1.035 µm

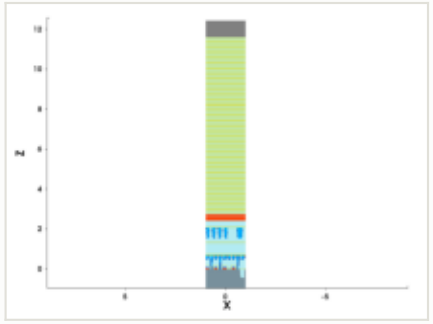

mask for this step


no mask for this step

this step

process area	WLP6_etch
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

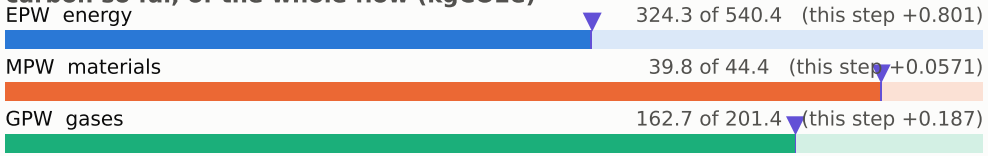


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

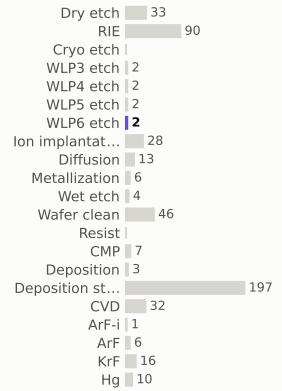

materials deposited (g)

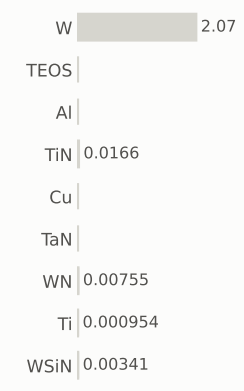

gases emitted (g)

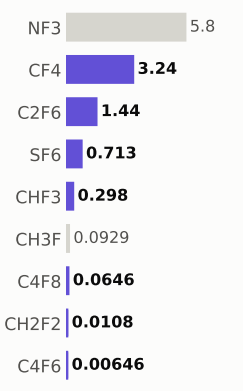

Step #7090: Dry_etch


etch_strip · Dry_etch

0.801	527.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



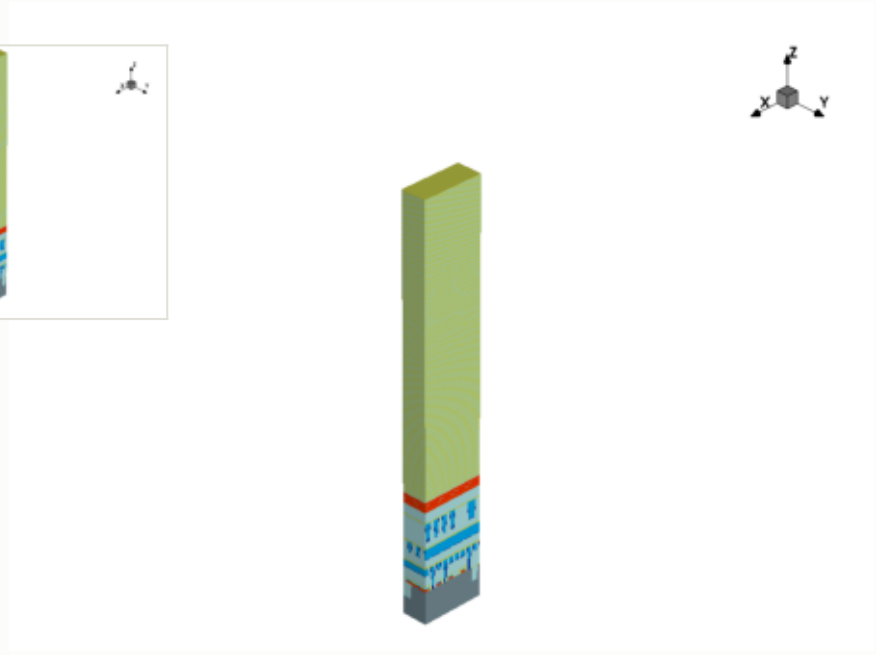


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

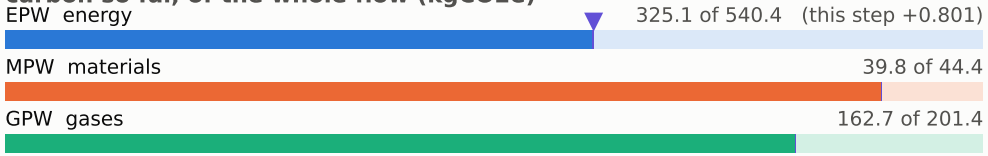


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

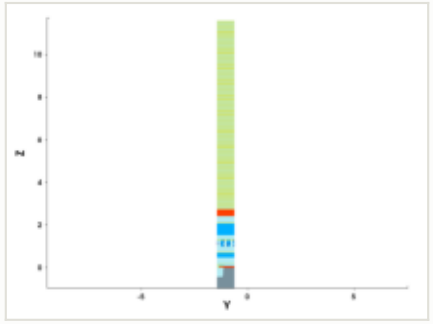


y cut at -1.035 µm

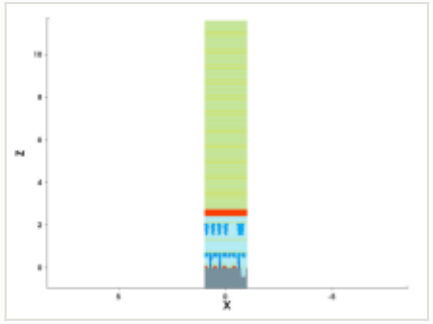

mask for this step

no mask for this step


steps by process area

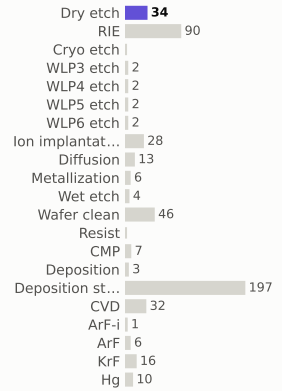

materials deposited (g)



gases emitted (g)

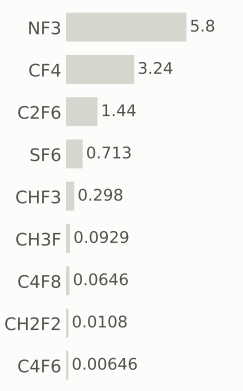

Step #7100: Wafer_clean

clean · Wafer_clean

0.169	527.8	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

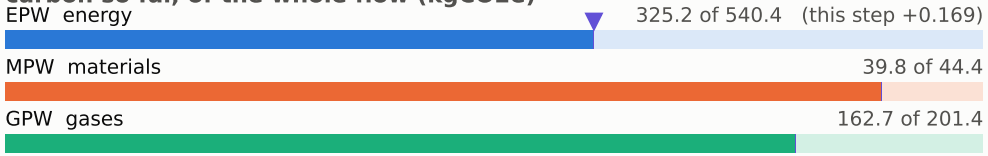


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

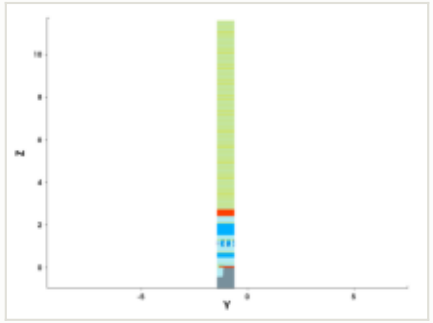


y cut at -1.035 µm

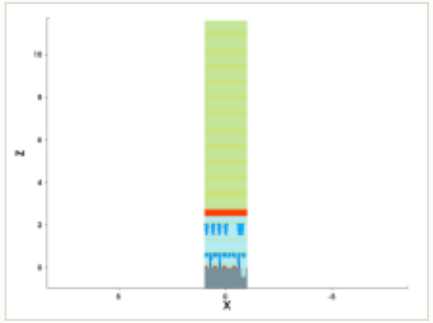

mask for this step

no mask for this step


steps by process area

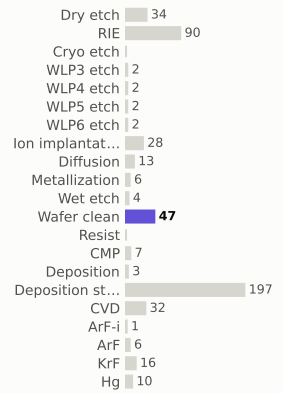

materials deposited (g)



gases emitted (g)

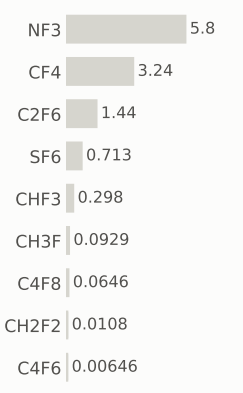

Step #7110: RIE


etch_anisotropic · RIE

1.04	528.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



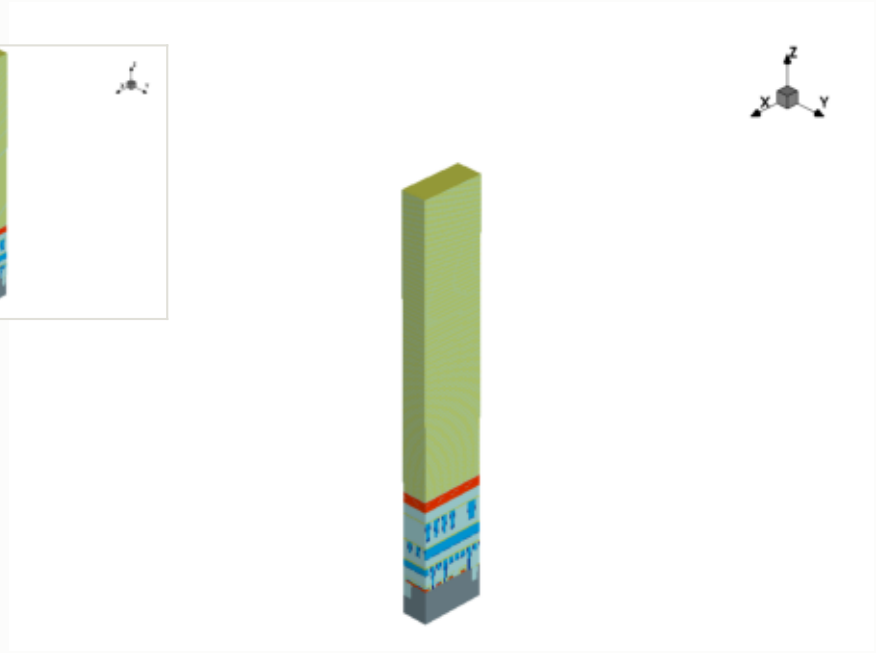


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

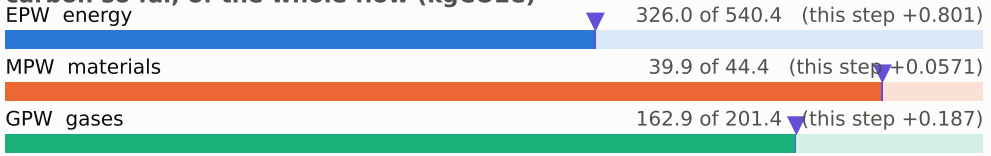


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

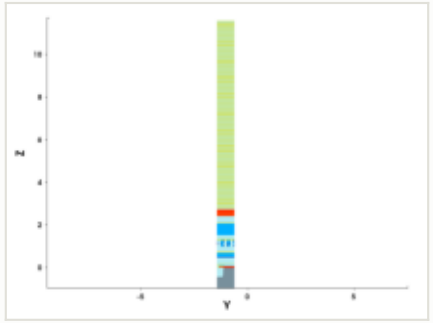


y cut at -1.035 µm

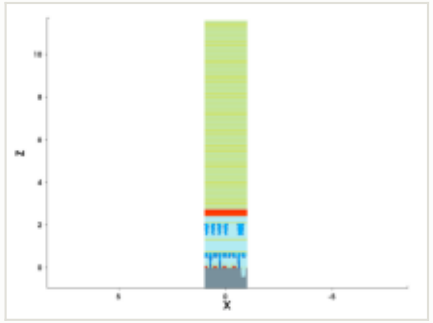

mask for this step

no mask for this step


steps by process area

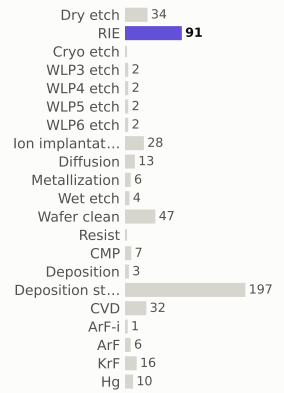

materials deposited (g)



gases emitted (g)

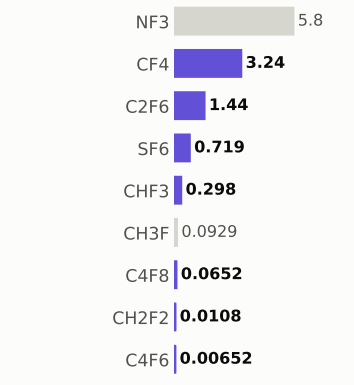

Step #7120: CVD


depo_isotropic · CVD

1.31	530.1	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



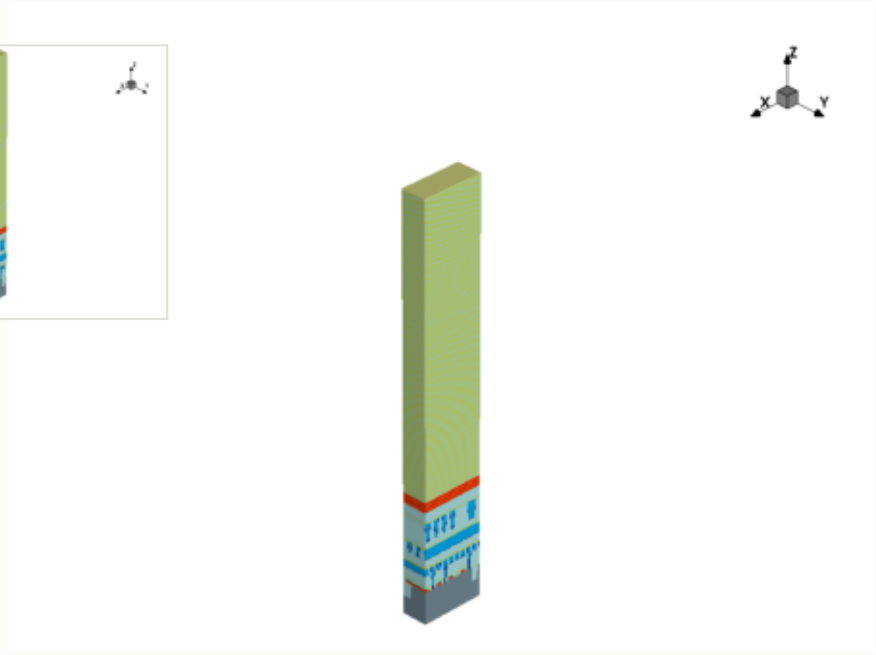


this step


process area	CVD
material	—
thickness	0.034 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

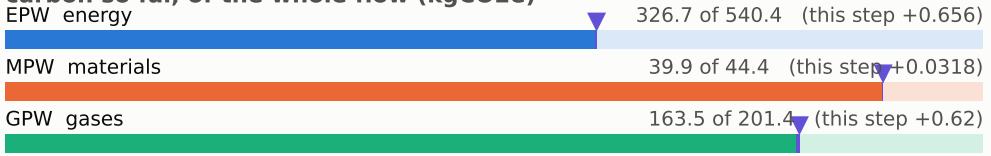


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

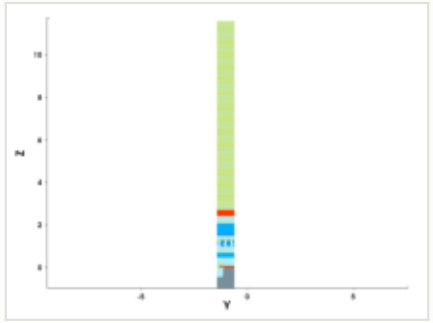


y cut at -1.035 µm

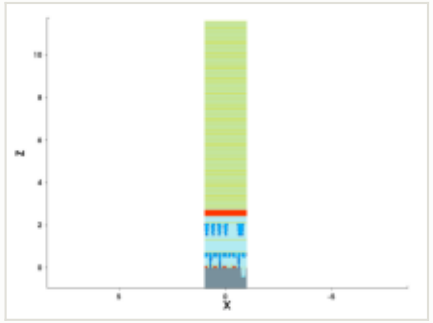


mask for this step

no mask for this step


steps by process area

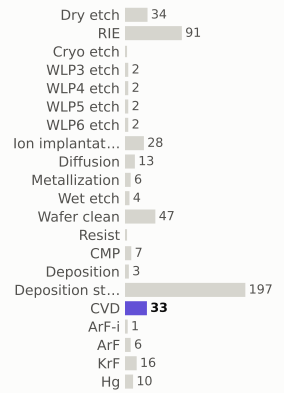

materials deposited (g)

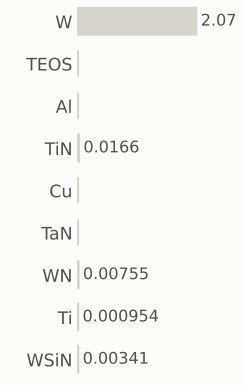

gases emitted (g)




Step #7130: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	530.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

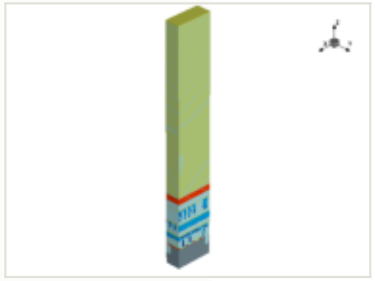


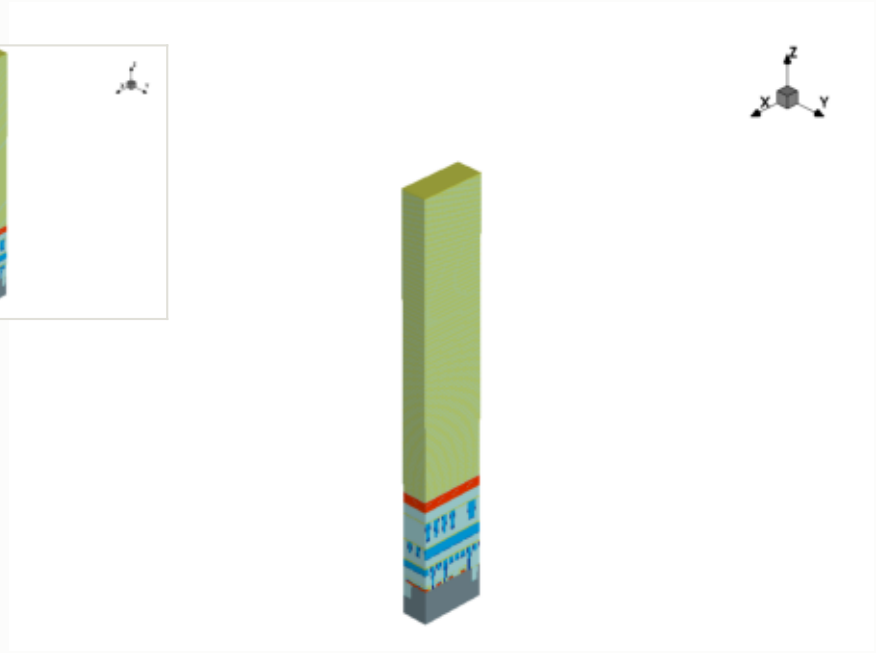

this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

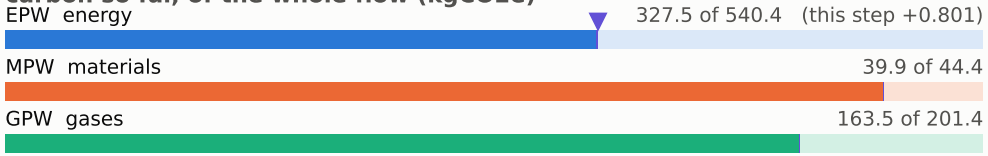


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

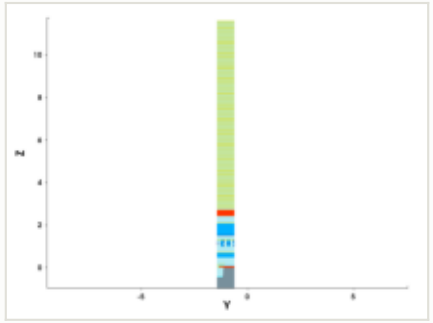


y cut at -1.035 µm

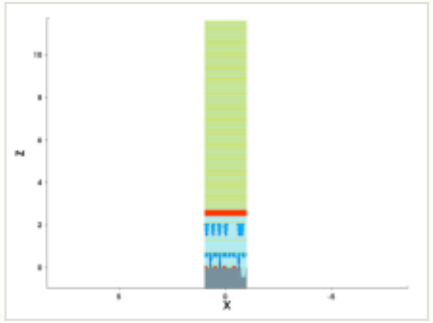


mask for this step

no mask for this step


steps by process area

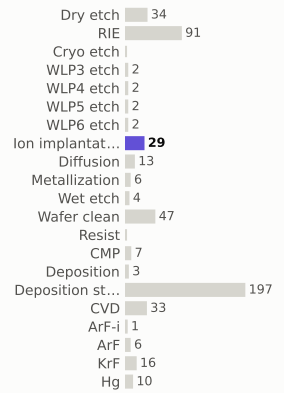

materials deposited (g)

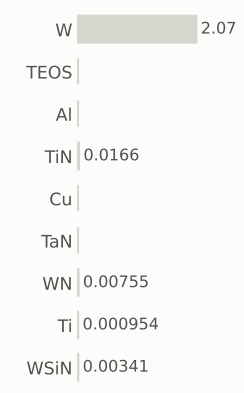

gases emitted (g)

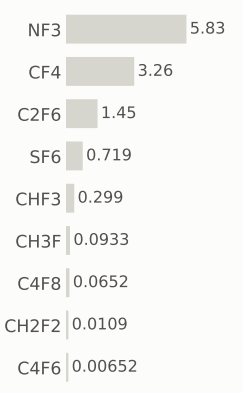


Step #7140: Wet_etch


etch_isotropic · Wet_etch

0.169	531.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

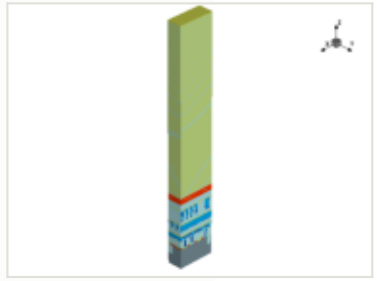

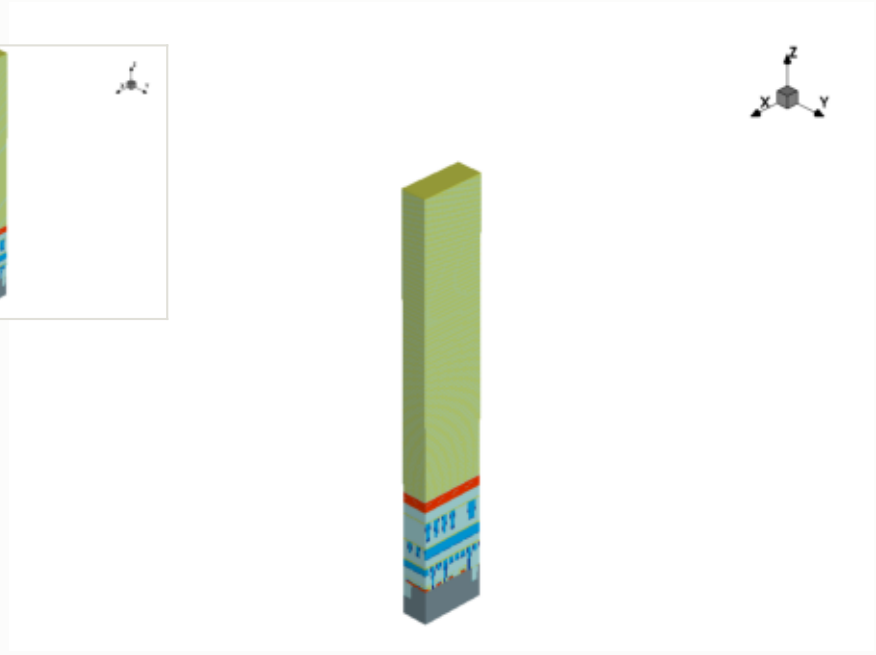


this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

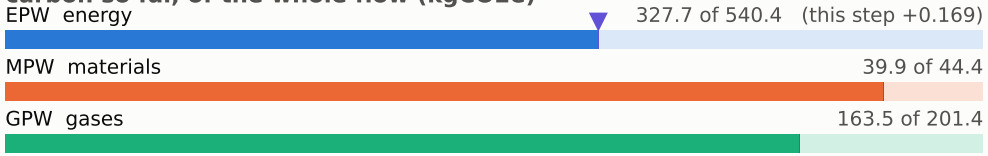


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

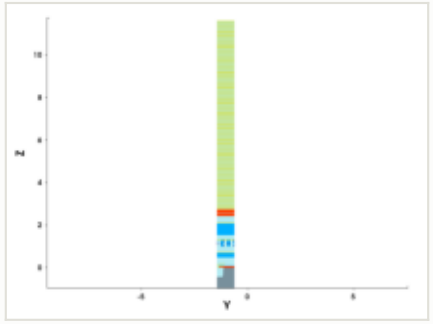


y cut at -1.035 µm

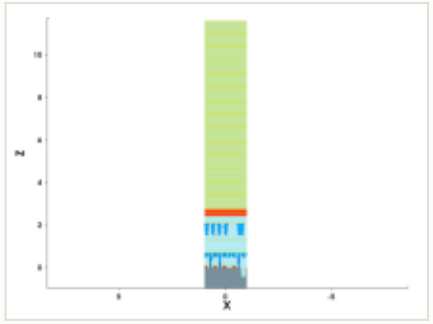

mask for this step

no mask for this step


steps by process area

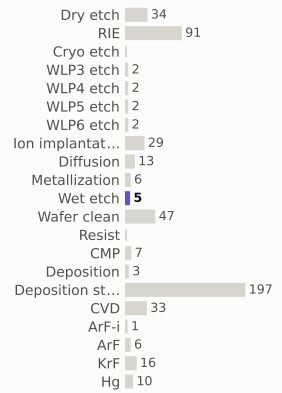

materials deposited (g)



gases emitted (g)

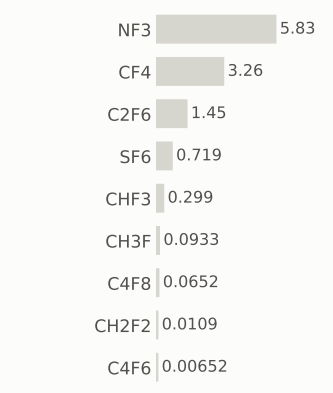


Step #7150: CVD


depo_isotropic · CVD

1.31	532.4	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

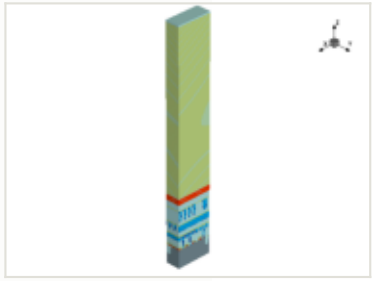

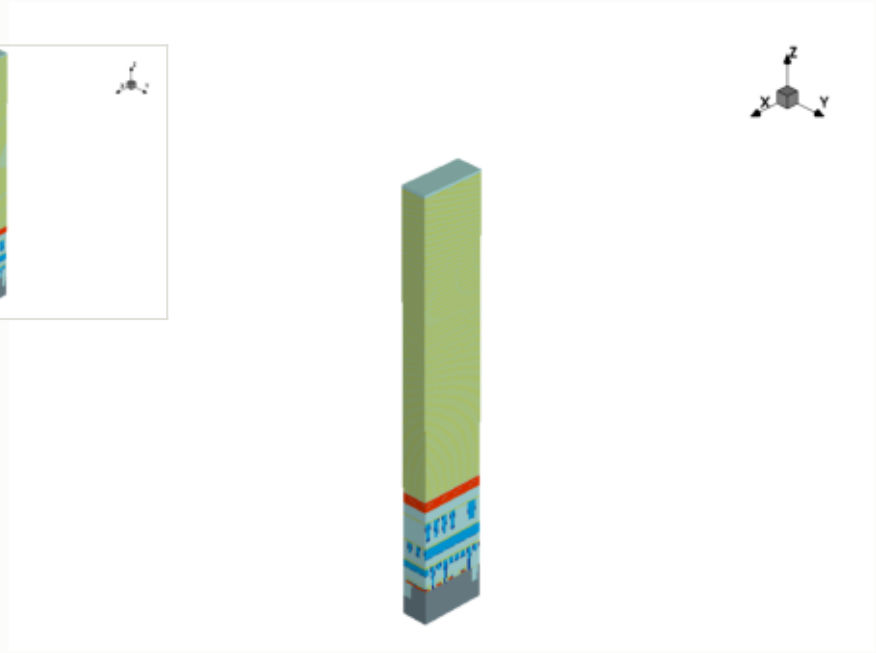


this step


process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

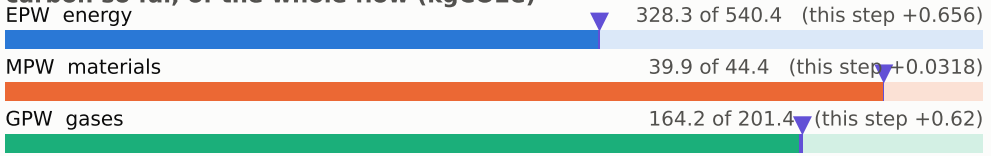


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

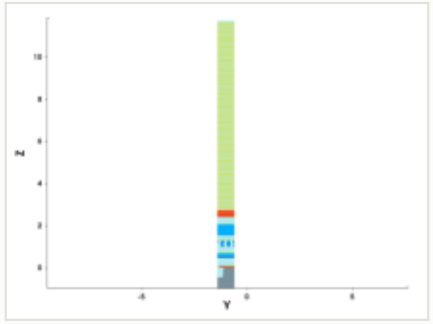


y cut at -1.035 µm

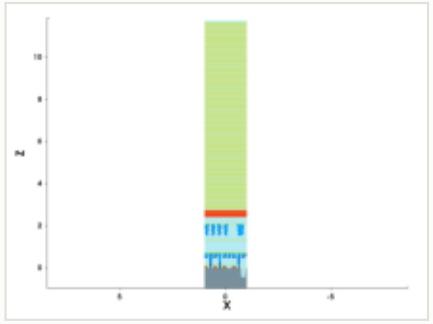

mask for this step

no mask for this step


steps by process area

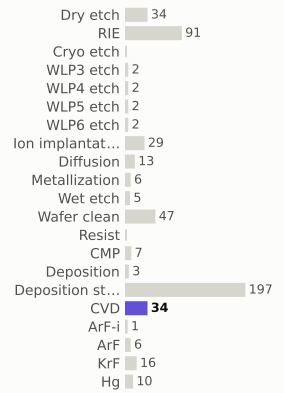

materials deposited (g)



gases emitted (g)

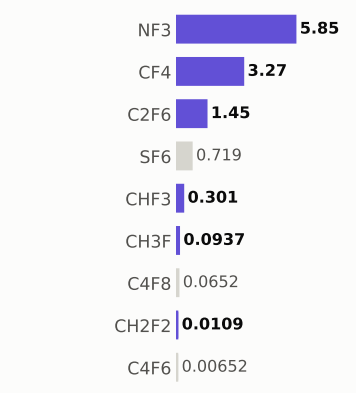

Step #7160: CVD


depo_isotropic · CVD

1.31	533.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



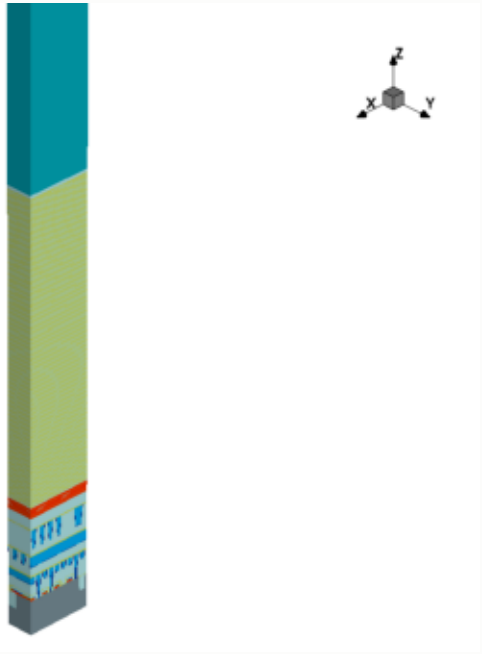


this step


process area	CVD
material	TEOS
thickness	9.99 µm
material GWP	2.85952 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0336 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

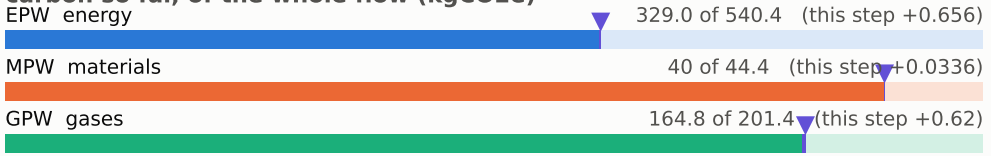


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

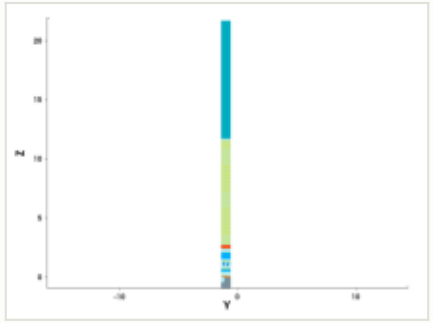


y cut at -1.035 µm

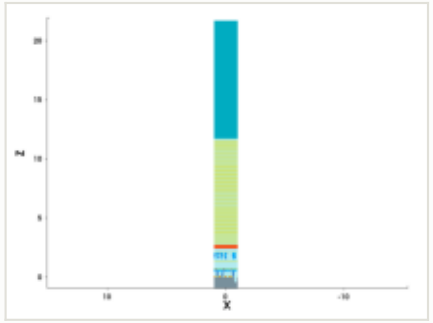


mask for this step

no mask for this step


steps by process area

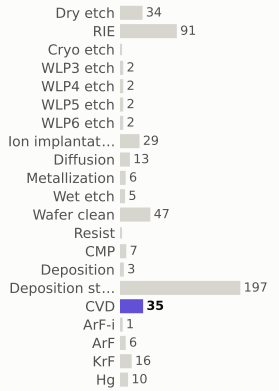

materials deposited (g)

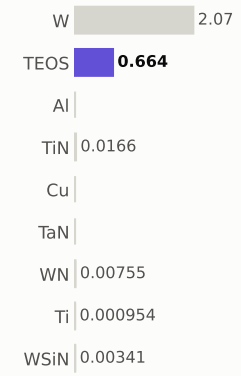

gases emitted (g)




Step #7170: CMP


etch_cmp · CMP

0.169	533.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

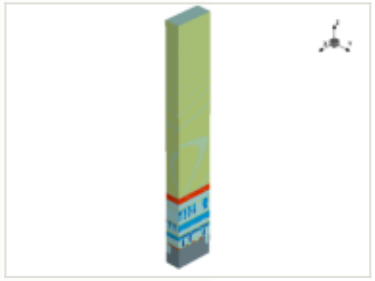

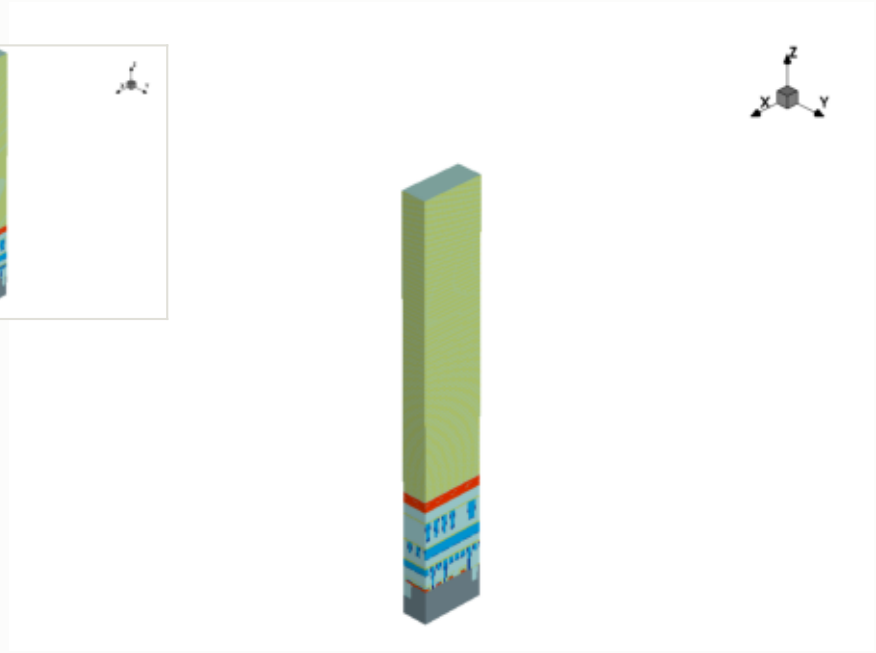


this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

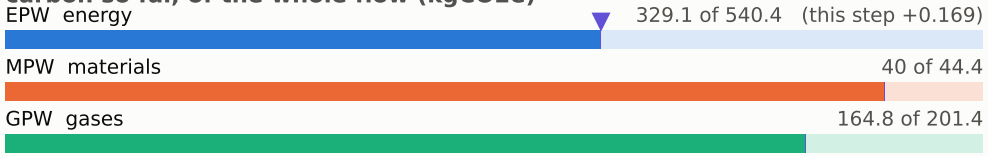


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

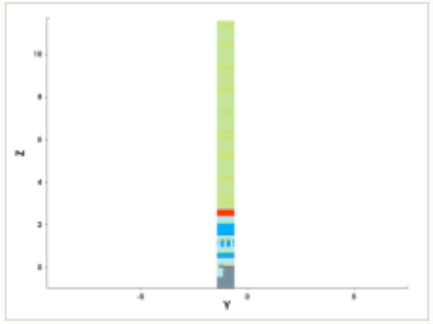


y cut at -1.035 µm

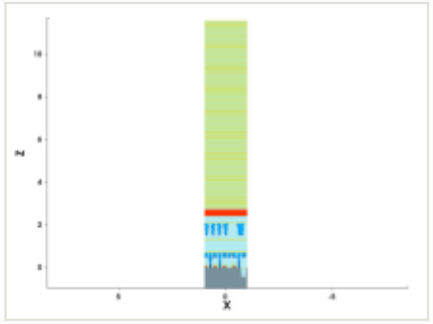


mask for this step

no mask for this step


steps by process area

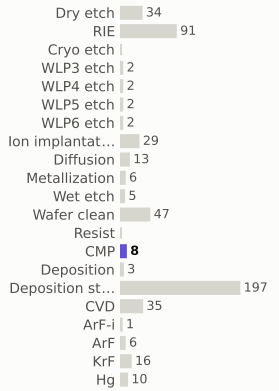

materials deposited (g)

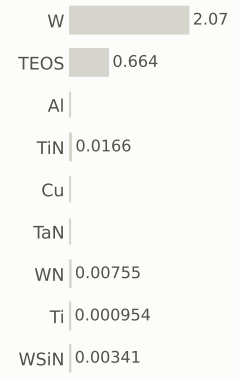

gases emitted (g)




Step #7180: Wafer_clean


clean · Wafer_clean

0.169	534.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

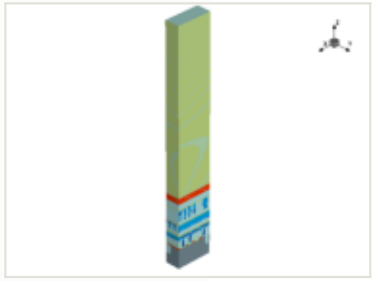


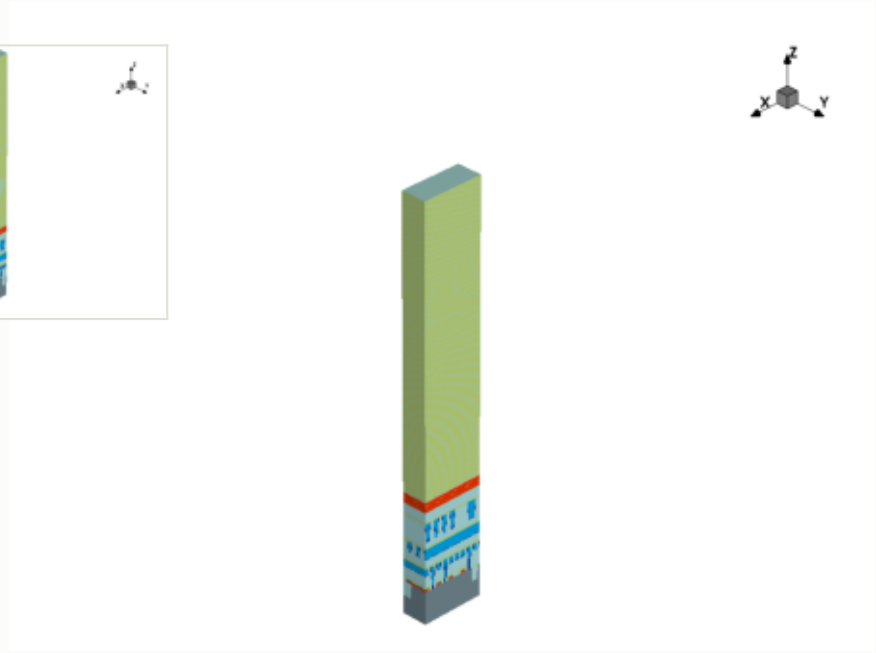

x cut at 0.000 µm

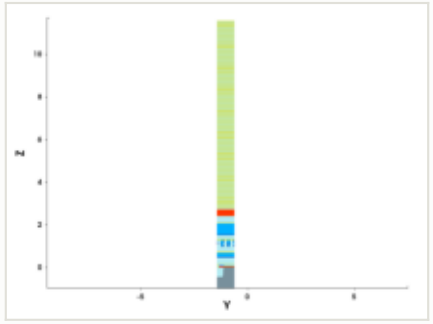

y cut at -1.035 µm

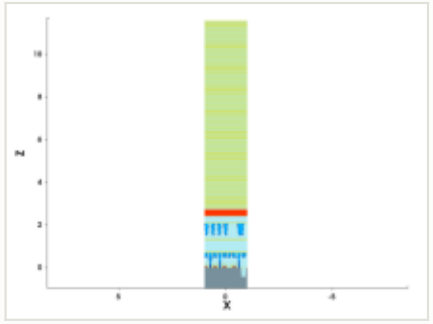

mask for this step


no mask for this step

this step


process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

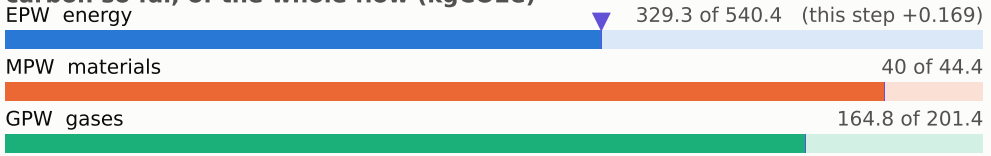


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

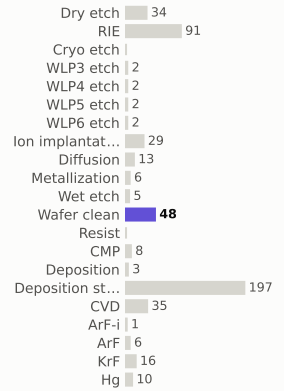

materials deposited (g)

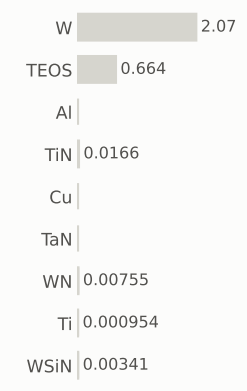

gases emitted (g)

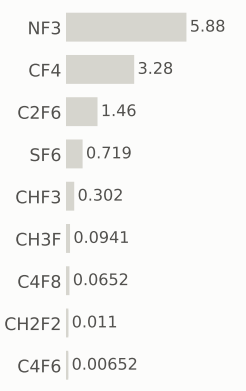


Step #7190: CVD

depo_isotropic · CVD

1.31	535.4	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

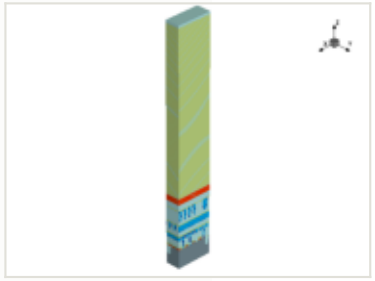




this step


process area	CVD
material	—
thickness	0.13 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

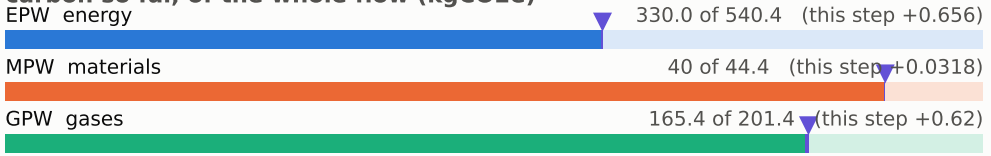


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

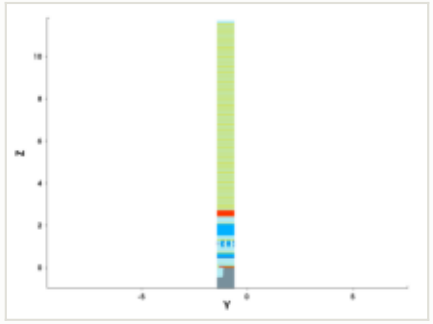


y cut at -1.035 µm

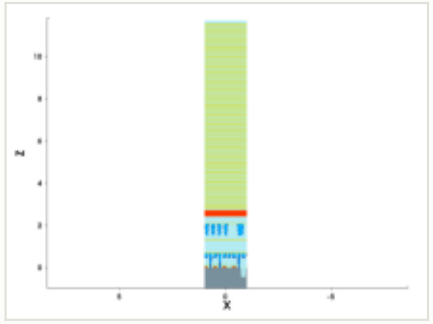


mask for this step

no mask for this step


steps by process area

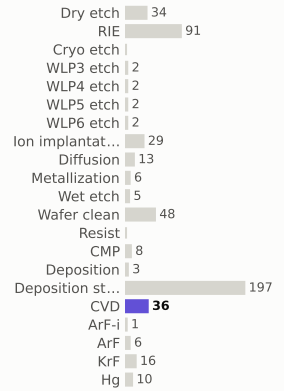

materials deposited (g)

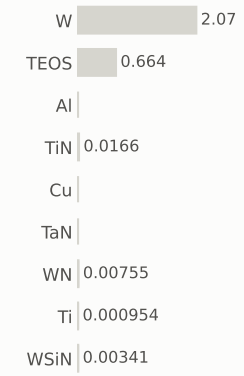

gases emitted (g)




Step #7210: CVD


depo_isotropic · CVD

1.31	536.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

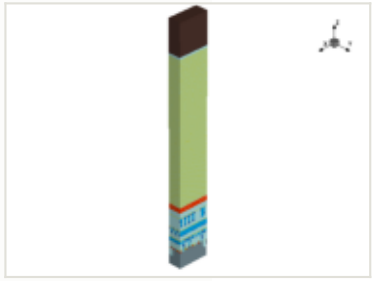

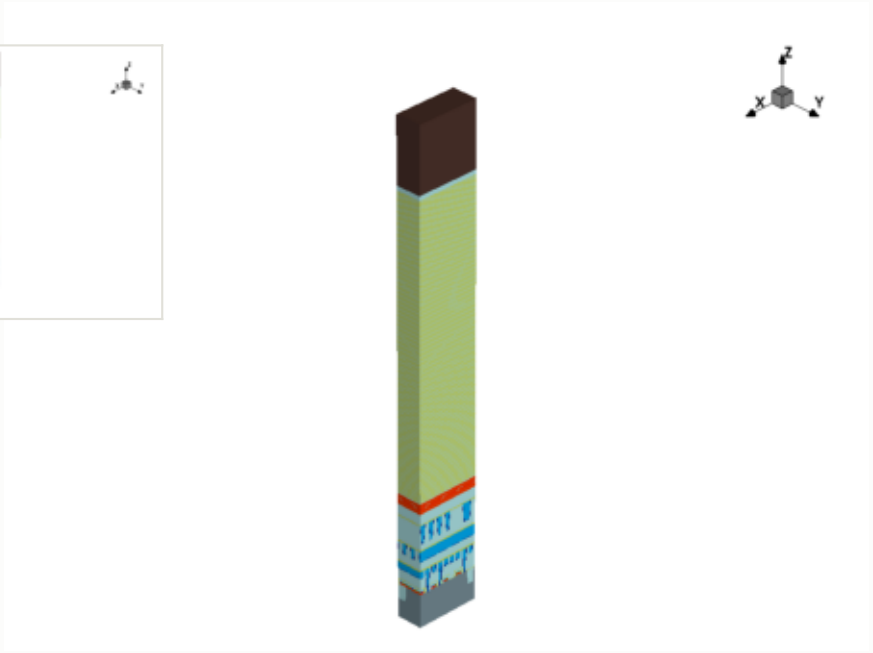


this step


process area	CVD
material	—
thickness	2 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

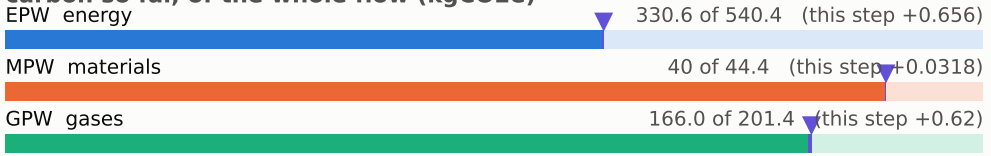


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

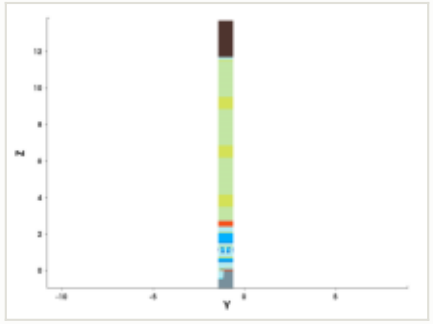


y cut at -1.035 µm

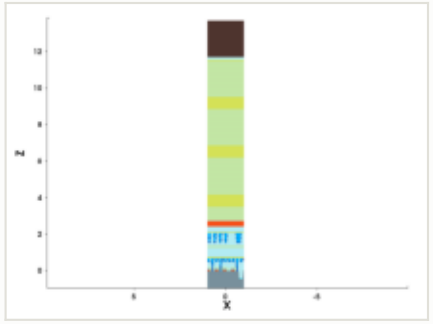


mask for this step

no mask for this step


steps by process area

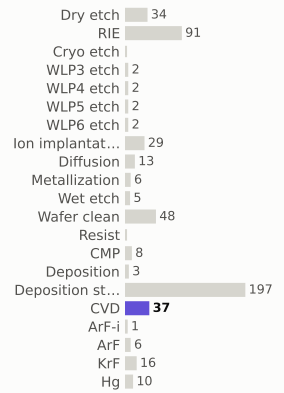

materials deposited (g)

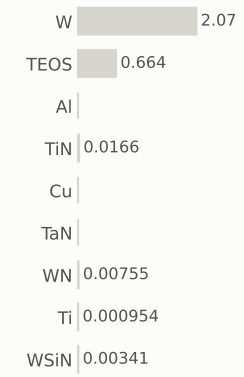

gases emitted (g)




Step #7220: CVD


depo_isotropic · CVD

1.31	538.0	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

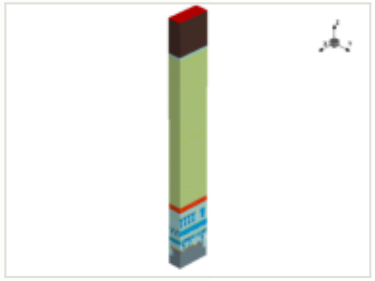

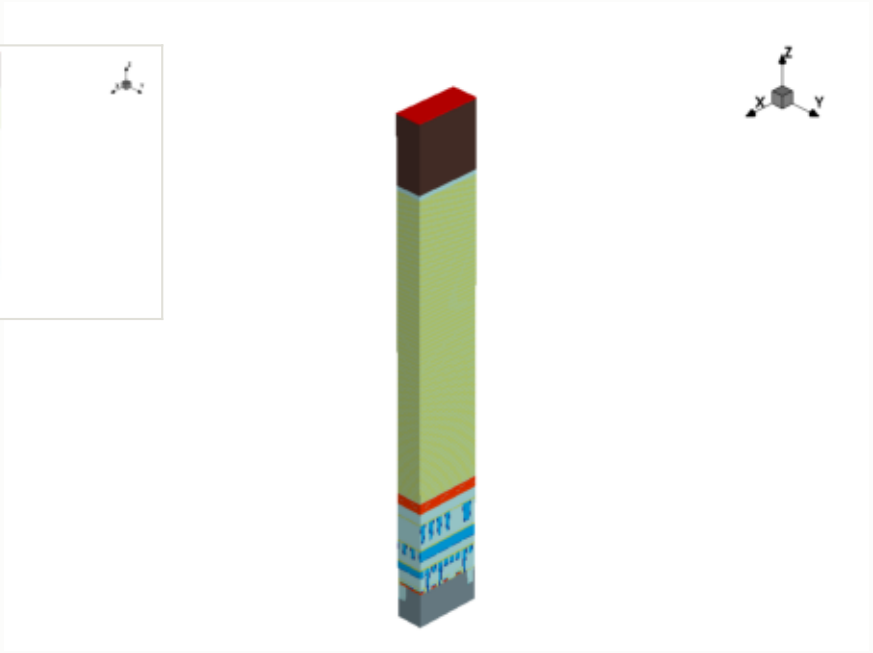


this step


process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

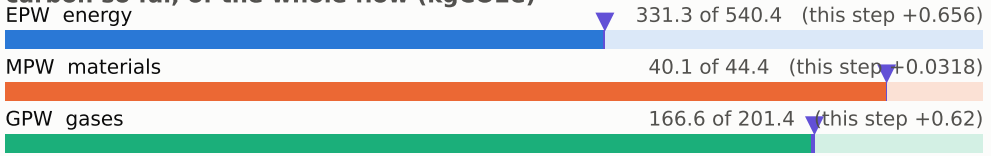


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

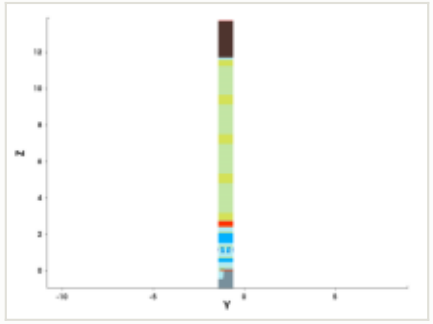


y cut at -1.035 µm

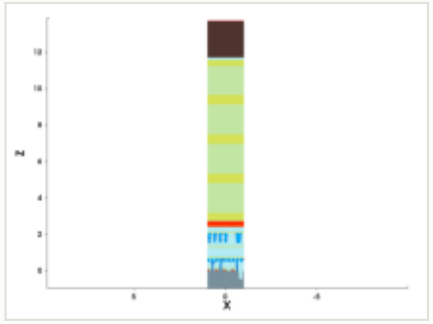


mask for this step

no mask for this step


steps by process area

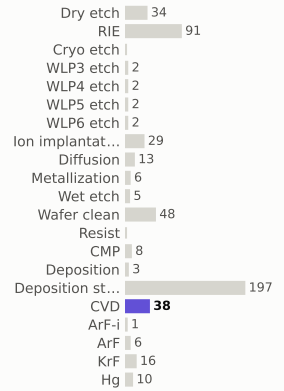

materials deposited (g)

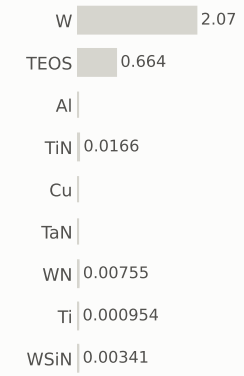

gases emitted (g)




Step #7230: Wafer_clean


clean · Wafer_clean

0.169	538.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit

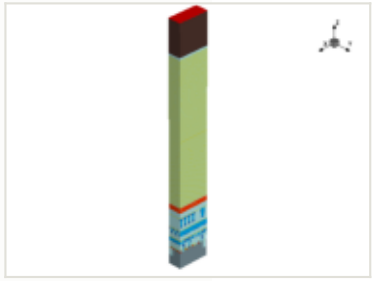


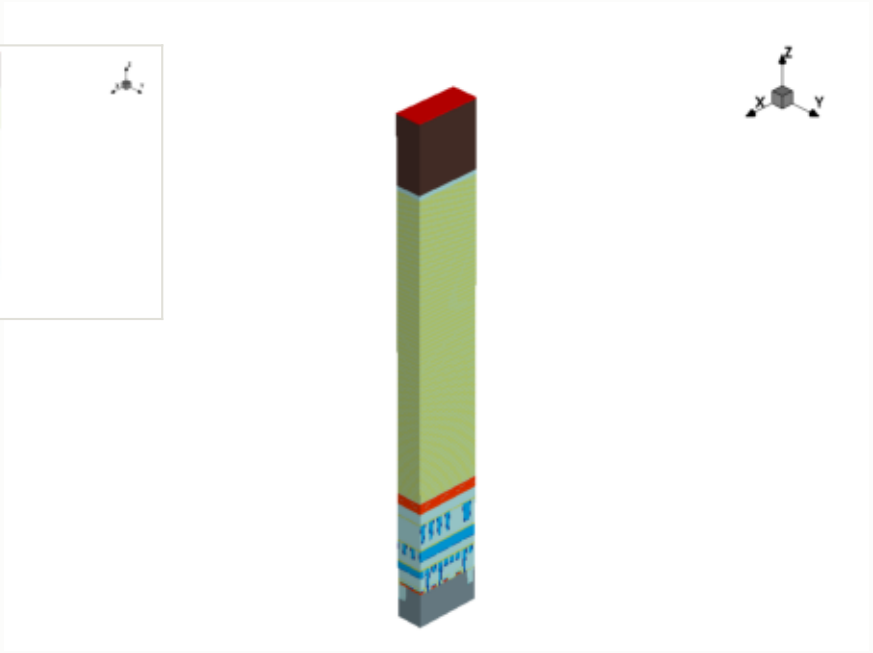

x cut at 0.000 µm

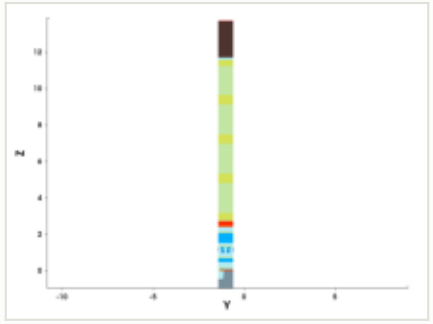

y cut at -1.035 µm

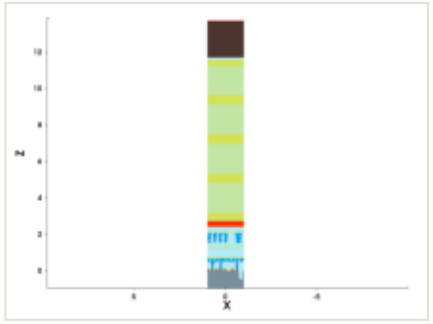

mask for this step


no mask for this step

this step


process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

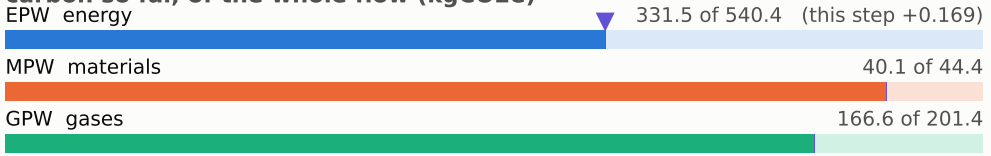


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

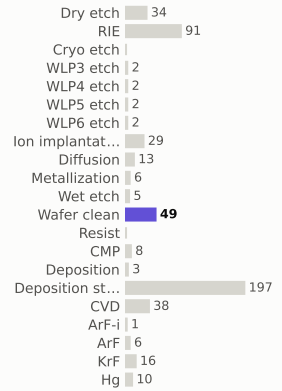

materials deposited (g)

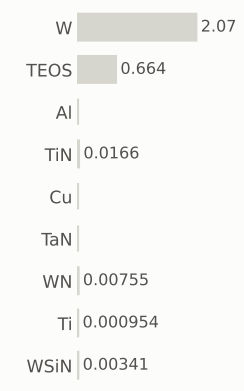

gases emitted (g)




Step #7240: ArF-i


litho_patterning · ArF-i

0.217	538.4	0.028%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

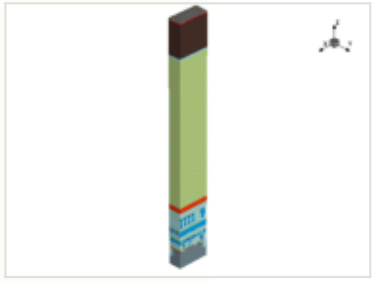

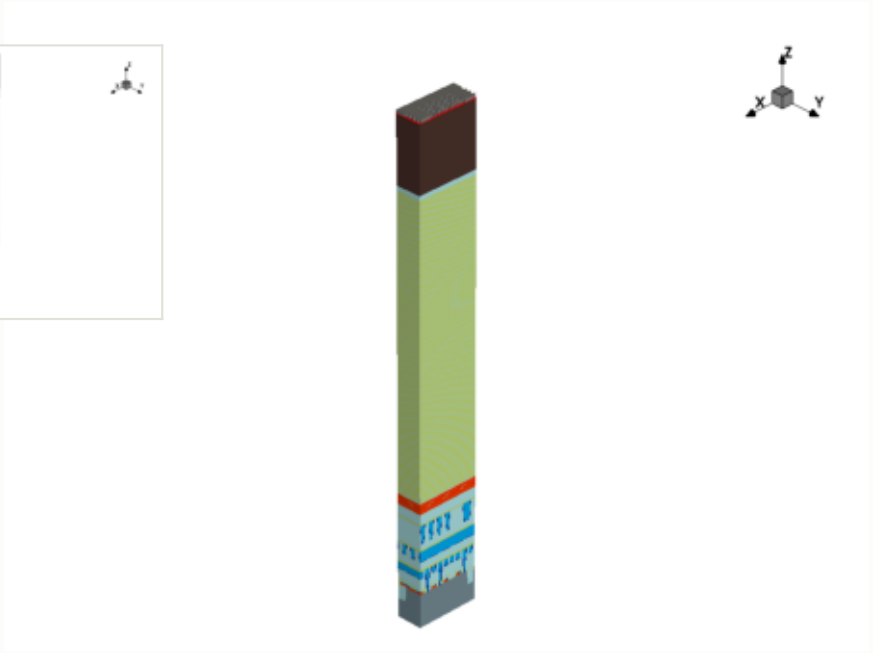


this step

process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

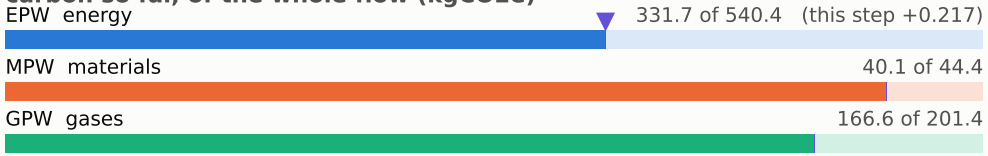


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

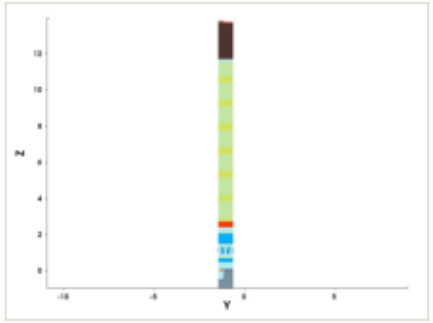


y cut at -1.035 µm

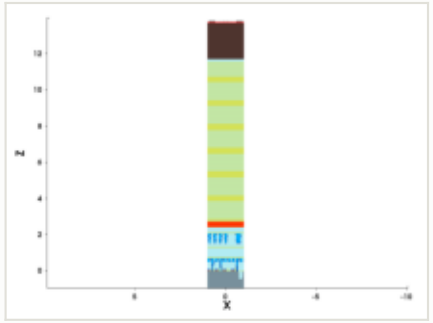

mask: layer 35:0 (OASIS)




steps by process area

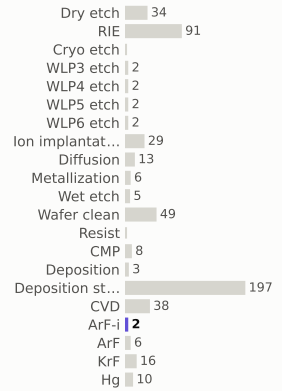

materials deposited (g)



gases emitted (g)

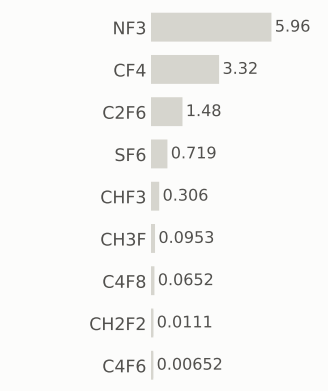


Step #7250: RIE


etch_anisotropic · RIE

1.04	539.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

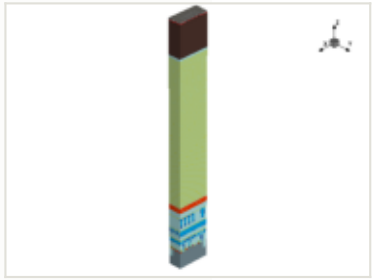

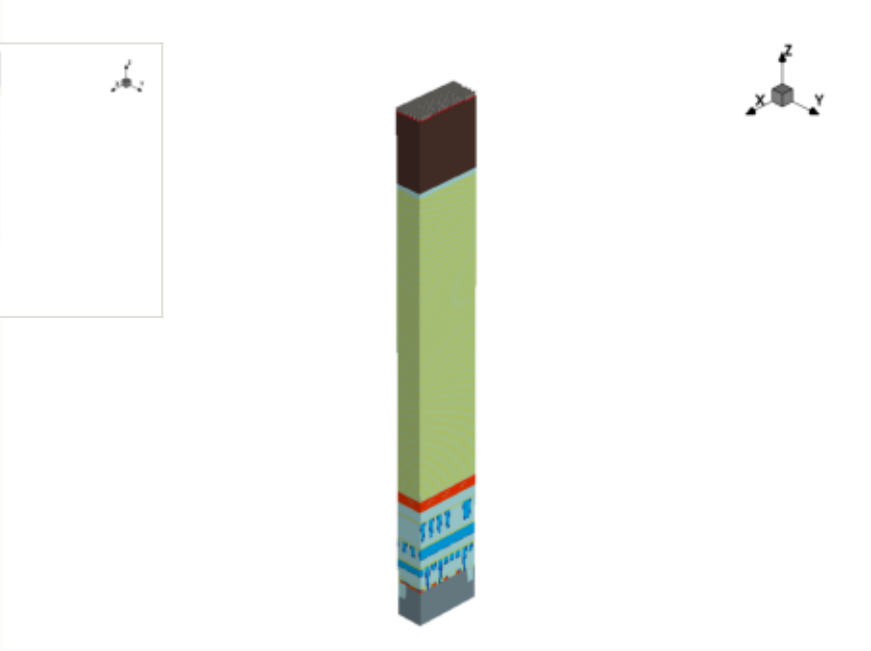


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

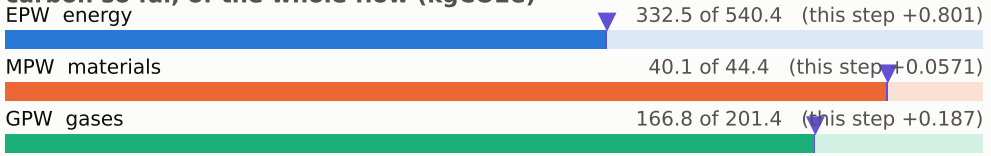


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

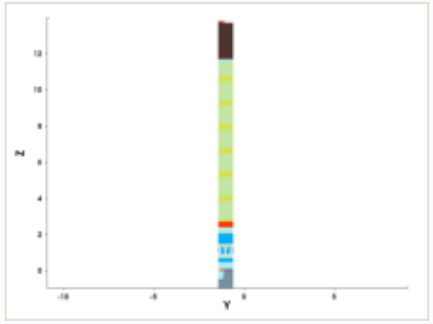


y cut at -1.035 µm

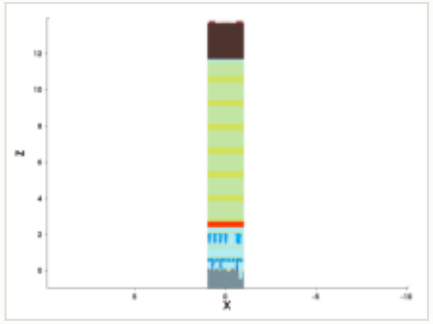


mask for this step

no mask for this step


steps by process area

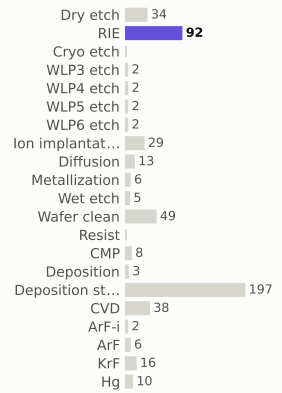

materials deposited (g)

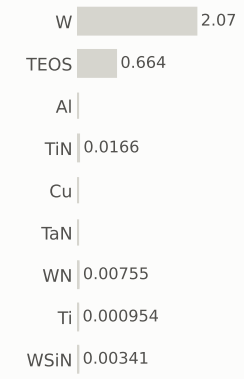

gases emitted (g)




Step #7260: RIE


etch_anisotropic · RIE

1.04	540.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

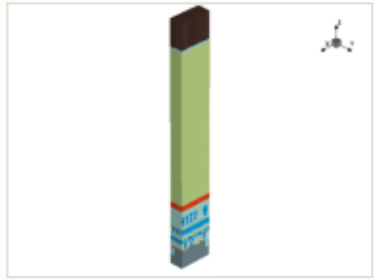

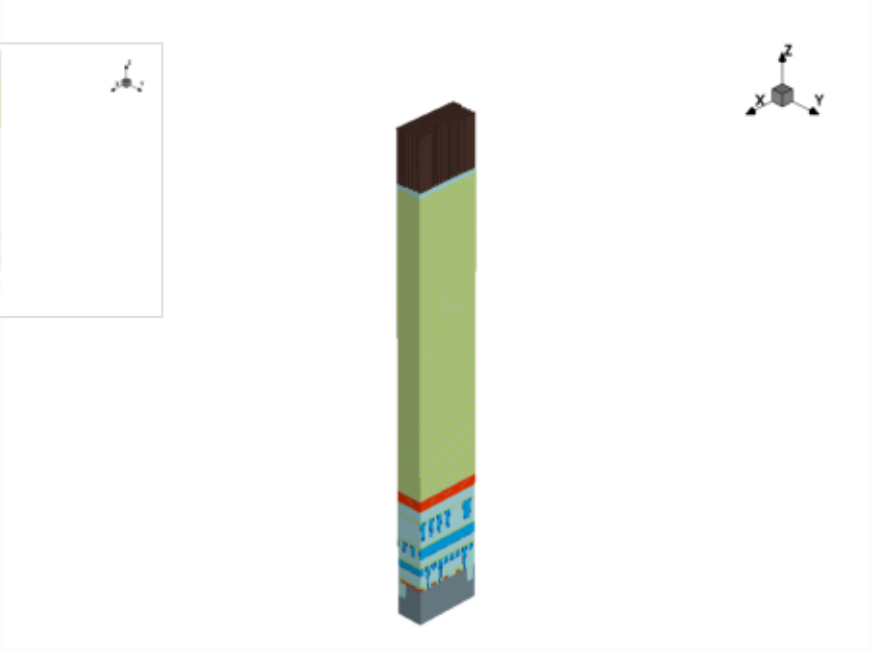


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

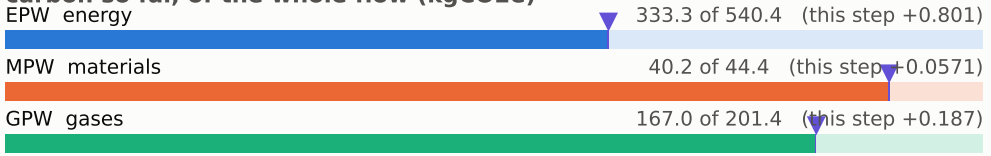


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

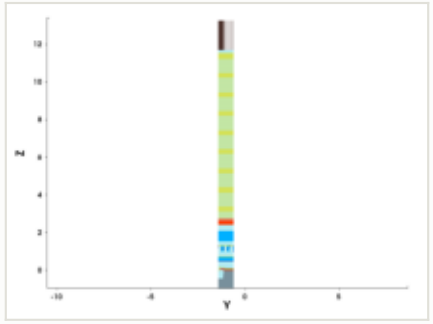


y cut at -1.035 µm

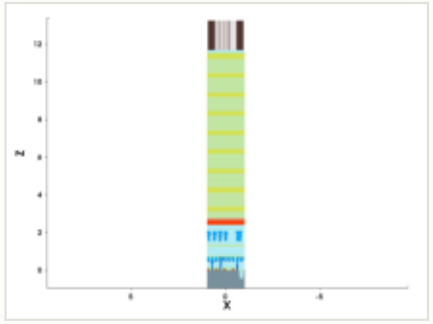


mask for this step

no mask for this step


steps by process area

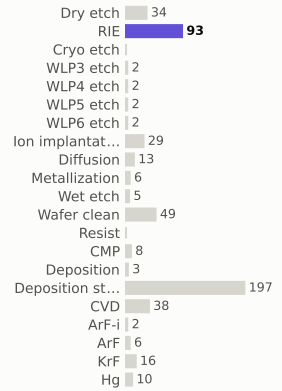

materials deposited (g)

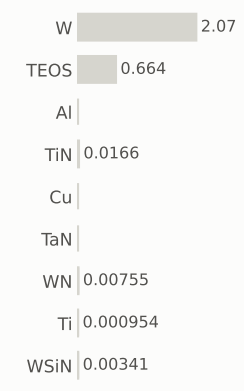

gases emitted (g)




Step #7270: RIE


etch_anisotropic · RIE

1.04	541.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit

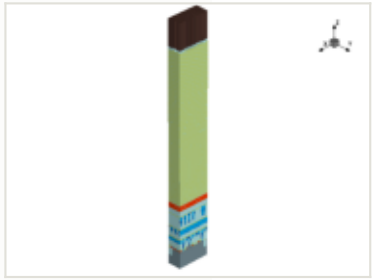

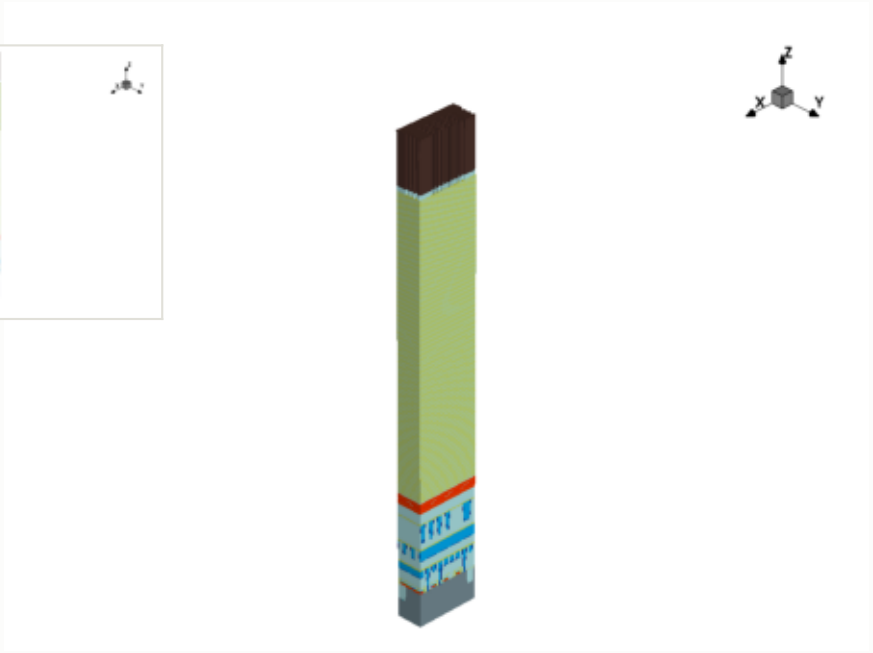


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

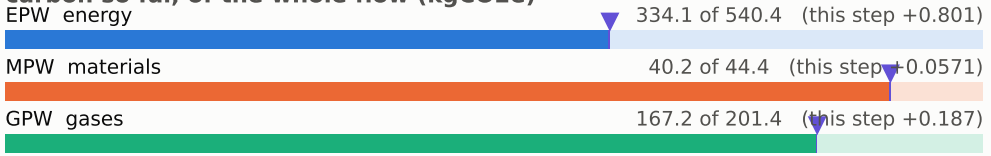


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

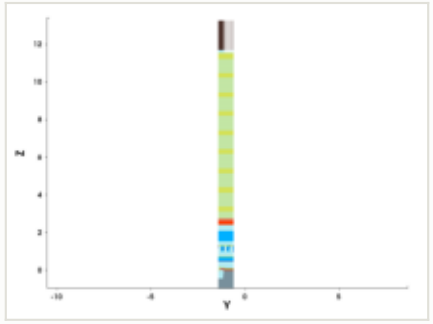


y cut at -1.035 µm

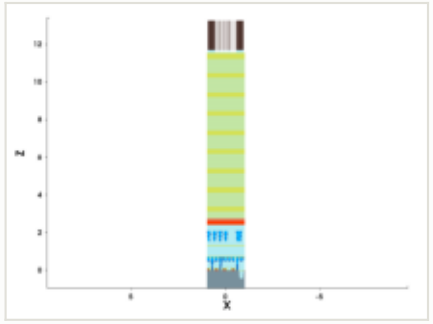


mask for this step

no mask for this step


steps by process area

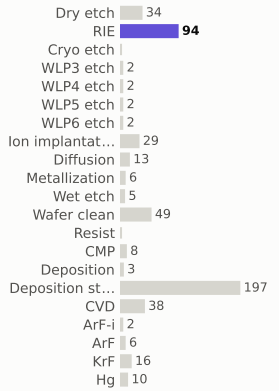

materials deposited (g)

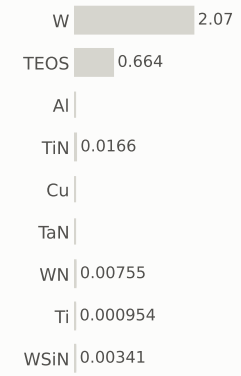

gases emitted (g)



Step #7280: Cryo_etch


etch_anisotropic · Cryo_etch

0.517	542.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




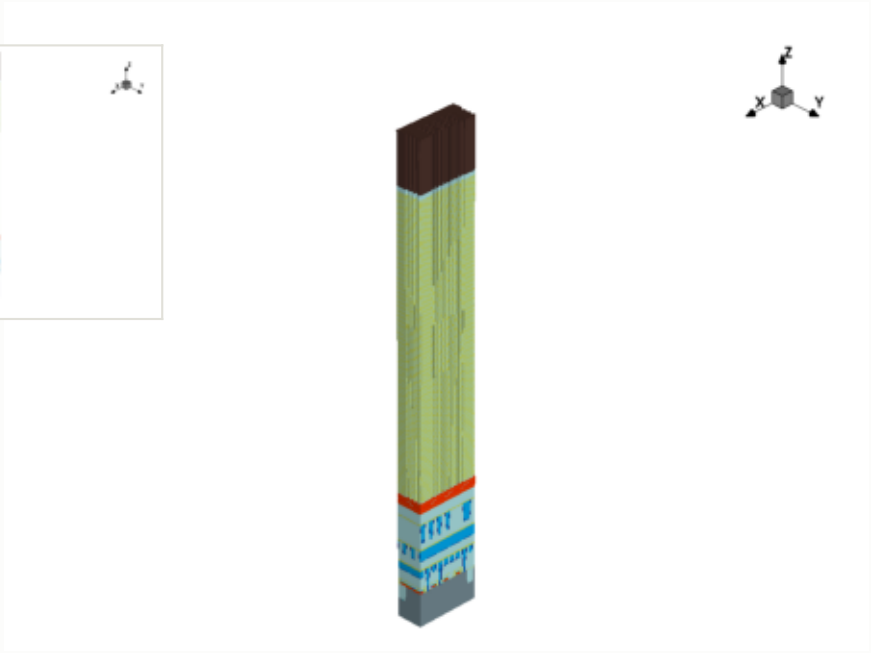

x cut at 0.000 µm

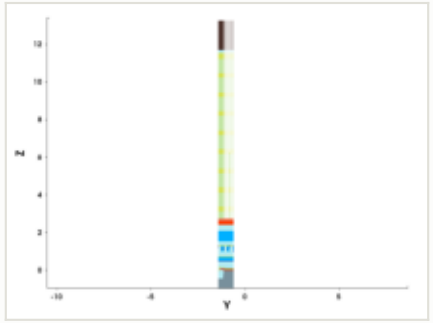

y cut at -1.035 µm

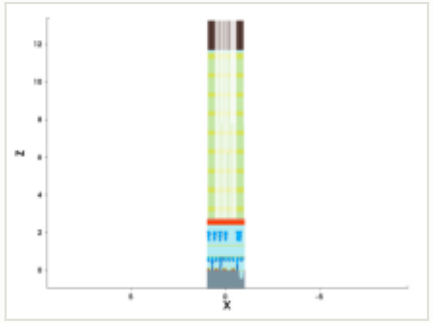

mask for this step


no mask for this step

this step


process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

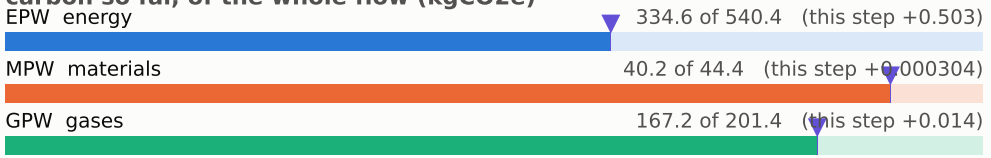


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

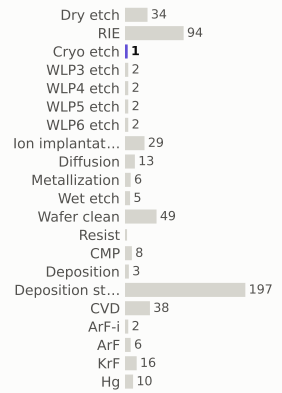

materials deposited (g)

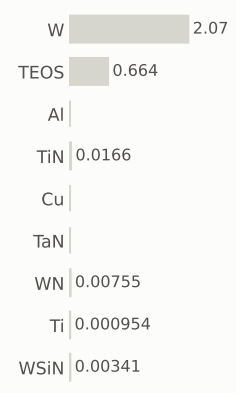

gases emitted (g)



Step #7280.051: Cryo_etch


etch_noop · Cryo_etch

0.517	542.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




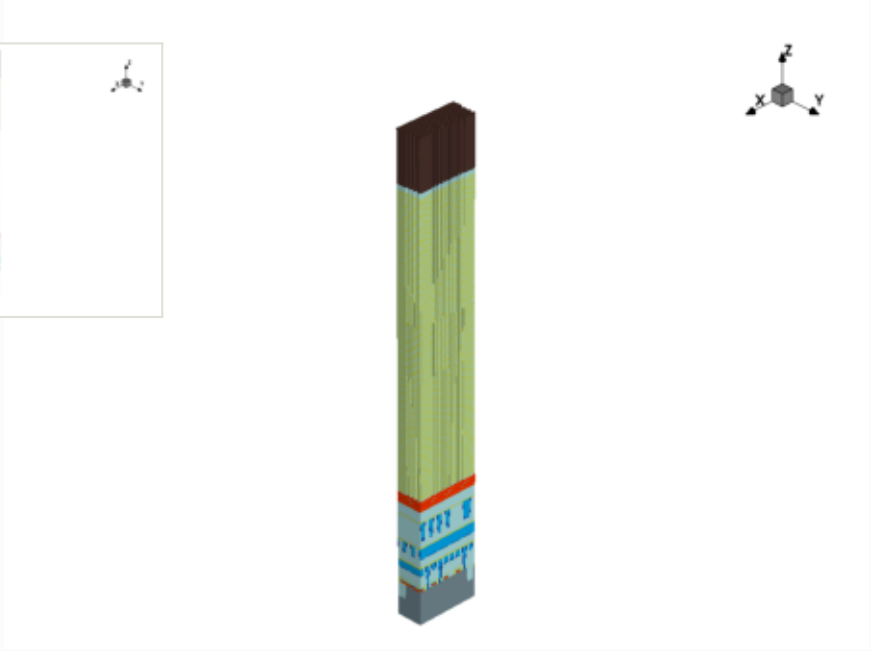

x cut at 0.000 µm

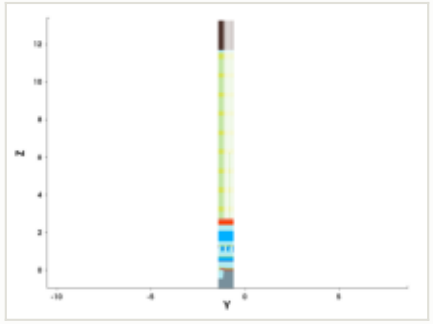

y cut at -1.035 µm

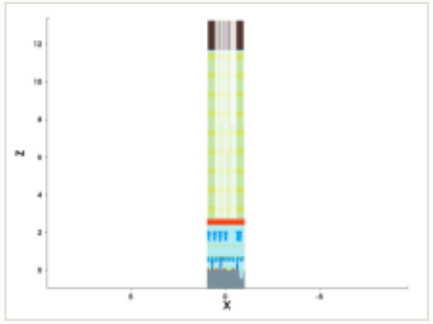

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

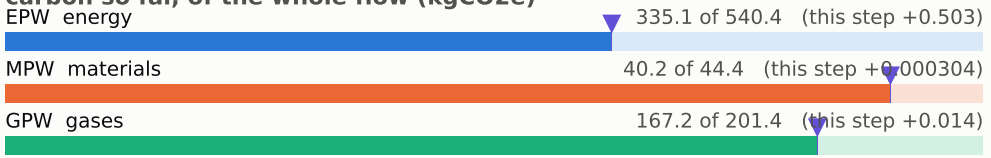


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

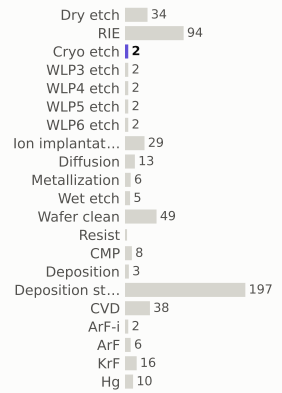

materials deposited (g)

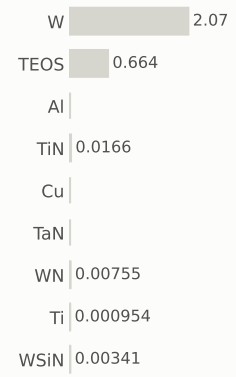

gases emitted (g)



Step #7280.102: Cryo_etch


etch_noop · Cryo_etch

0.517	543.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




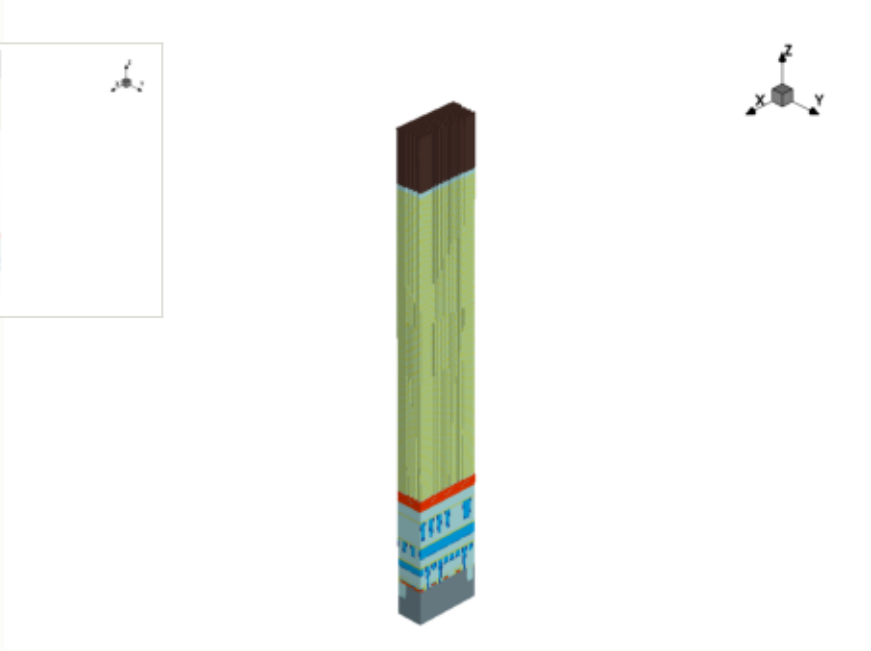

x cut at 0.000 µm

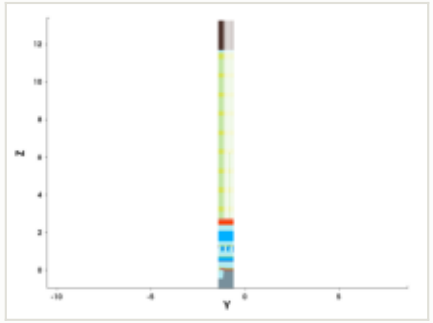

y cut at -1.035 µm

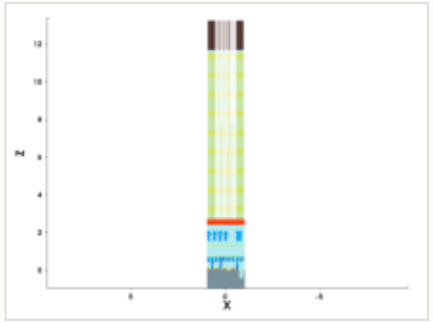

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

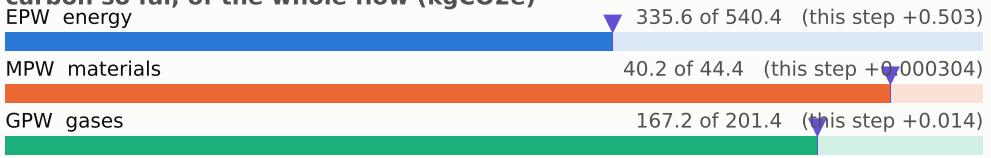


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

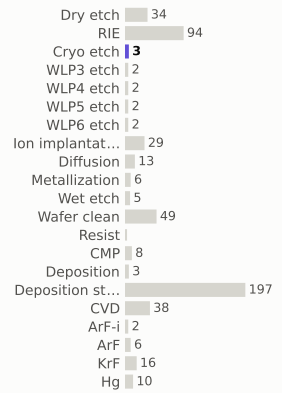

materials deposited (g)

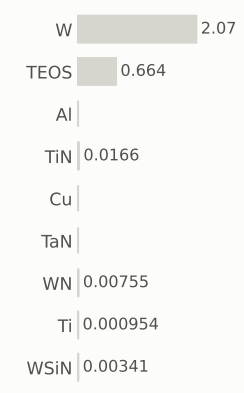

gases emitted (g)



Step #7280.1531: Cryo_etch

etch_noop · Cryo_etch

0.517	543.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

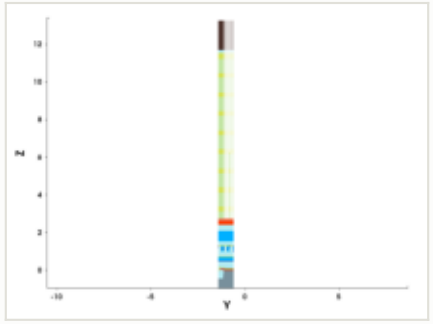

y cut at -1.035 µm

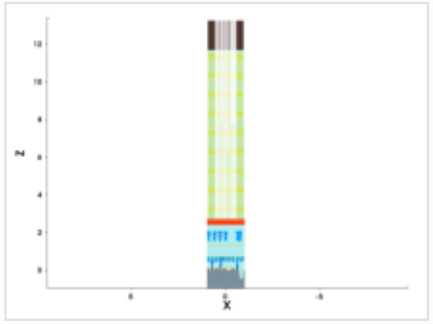

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

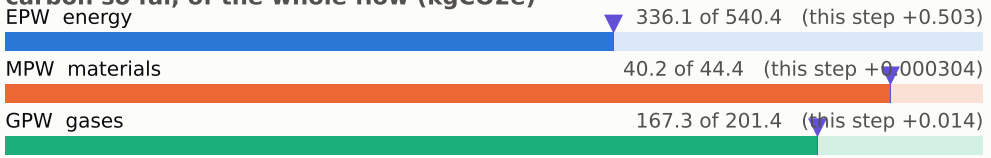


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

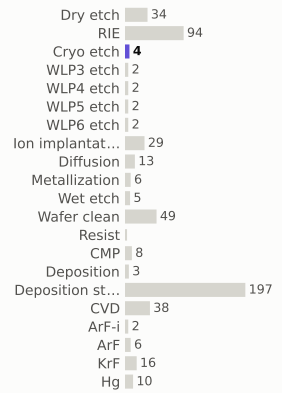

materials deposited (g)

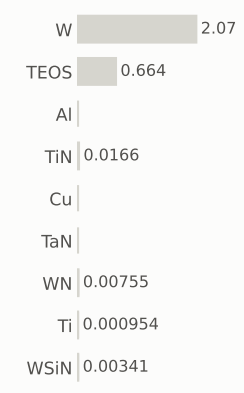

gases emitted (g)



Step #7280.2041: Cryo_etch


etch_noop · Cryo_etch

0.517	544.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




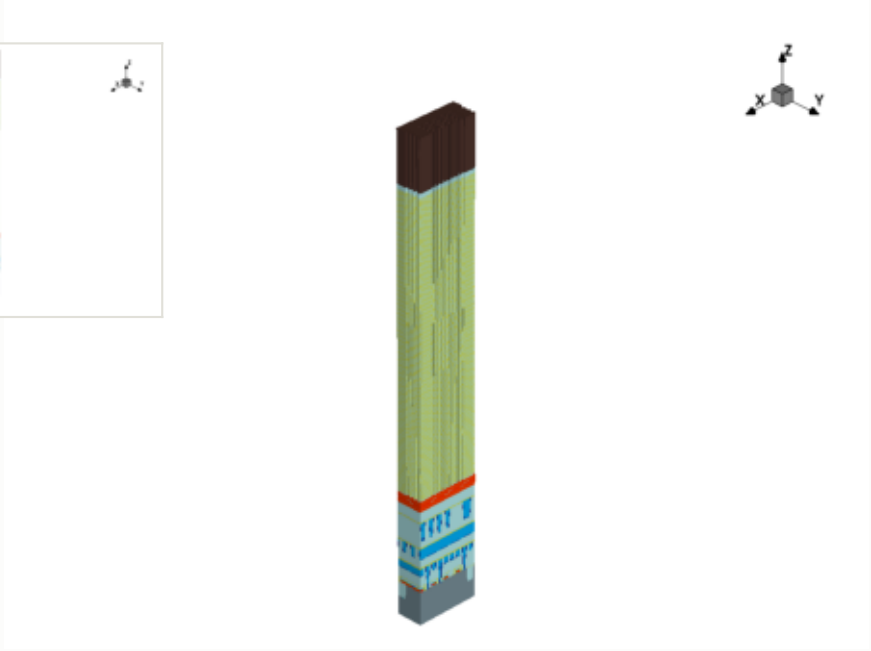

x cut at 0.000 µm

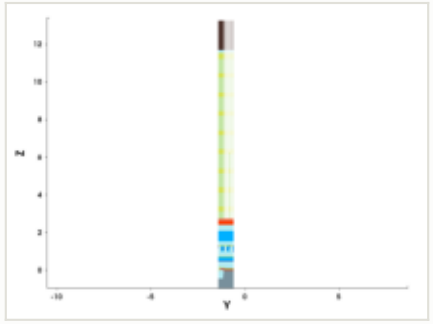

y cut at -1.035 µm

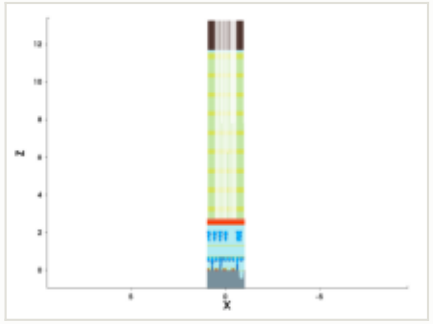

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

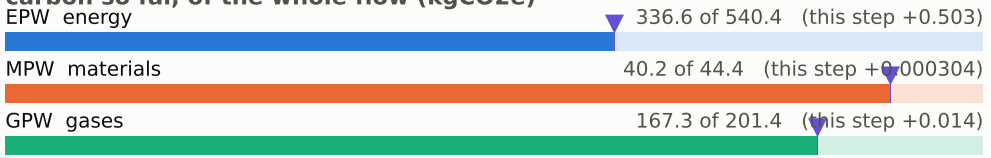


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

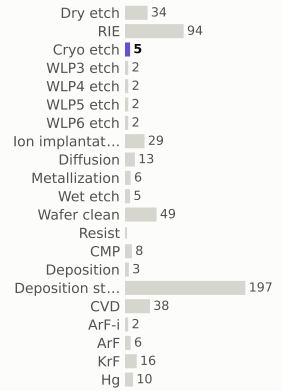

materials deposited (g)

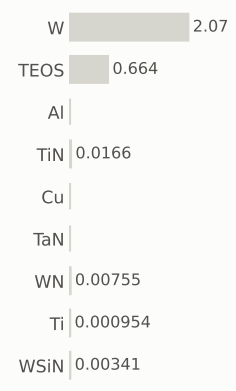

gases emitted (g)



Step #7280.2551: Cryo_etch


etch_noop · Cryo_etch

0.517	544.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




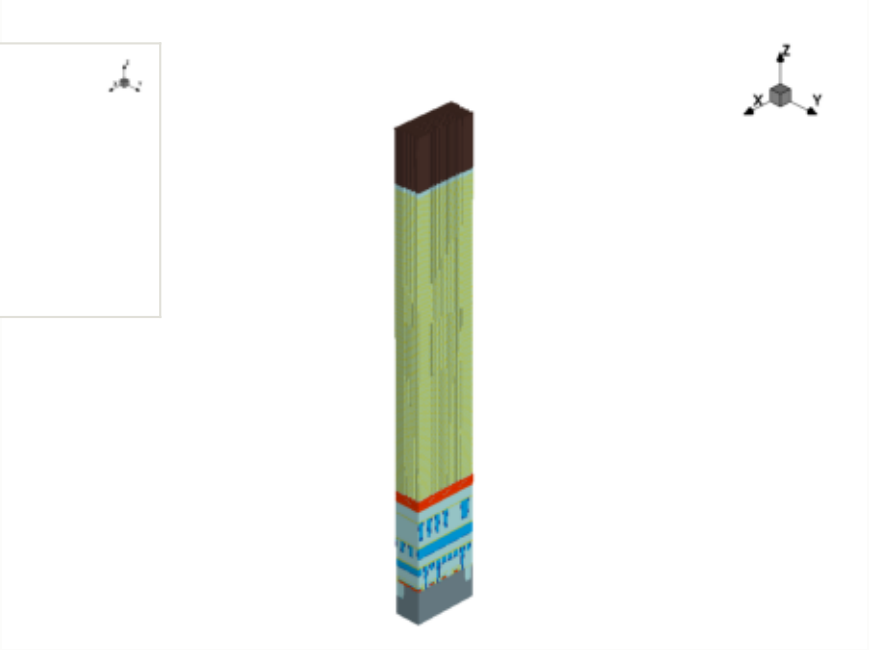

x cut at 0.000 µm

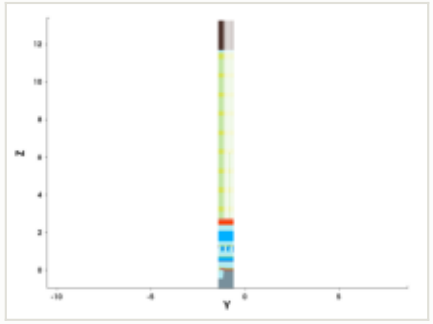

y cut at -1.035 µm

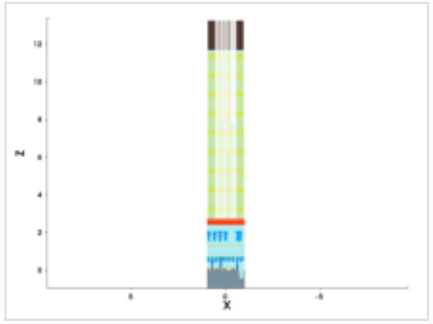

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

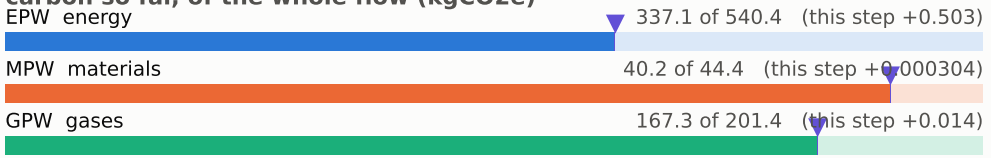


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

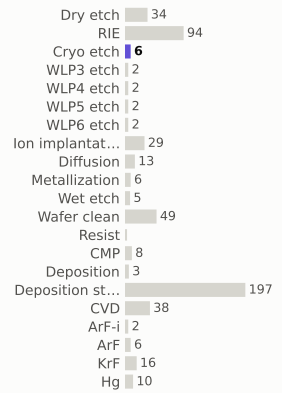

materials deposited (g)



gases emitted (g)



Step #7280.3061: Cryo_etch


etch_noop · Cryo_etch

0.517	545.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




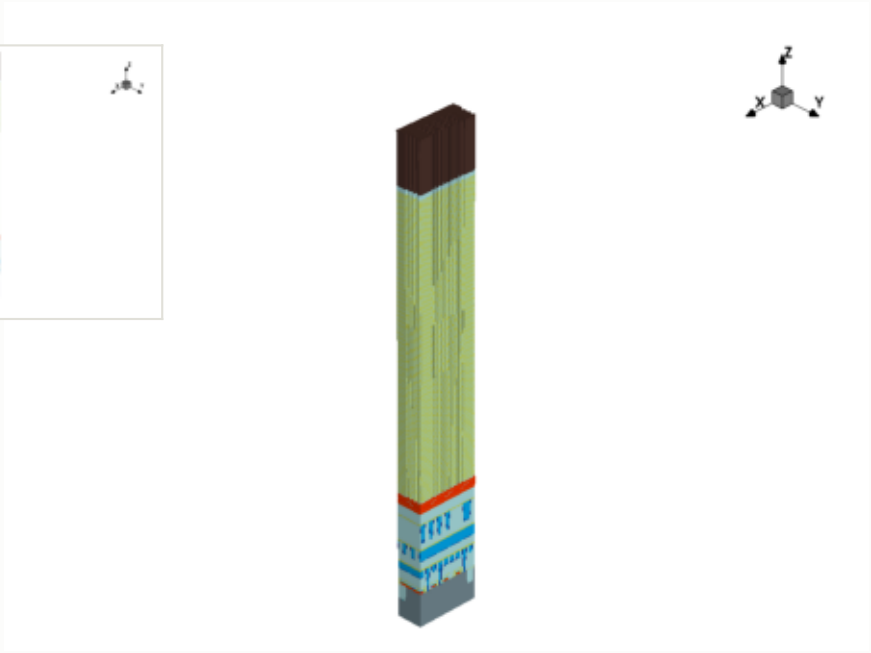

x cut at 0.000 µm

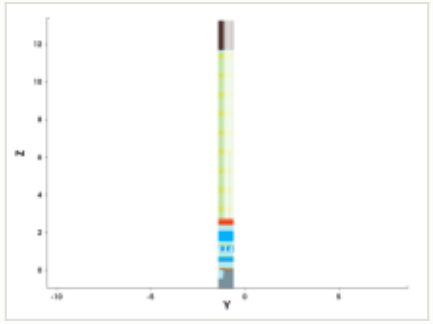

y cut at -1.035 µm

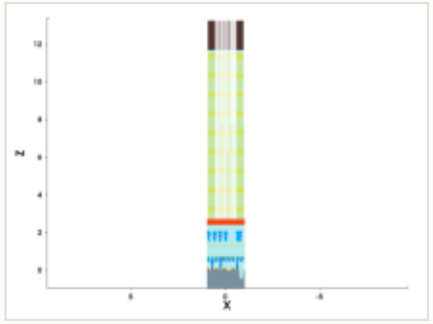

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

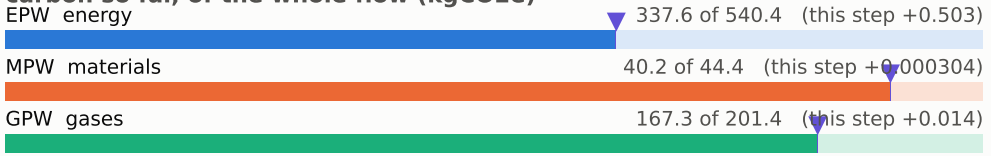


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

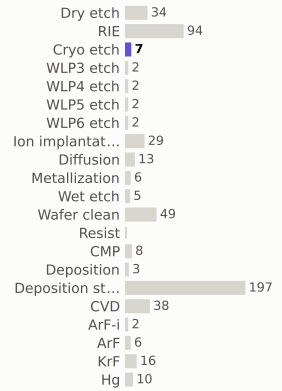

materials deposited (g)

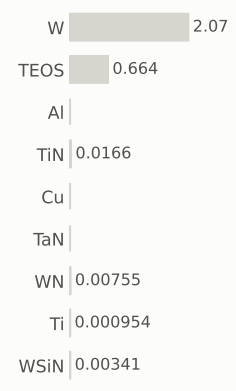

gases emitted (g)



Step #7280.3571: Cryo_etch


etch_noop · Cryo_etch

0.517	545.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




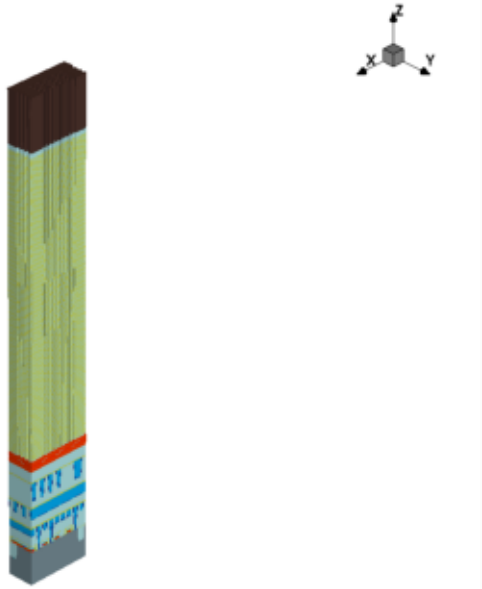

x cut at 0.000 µm

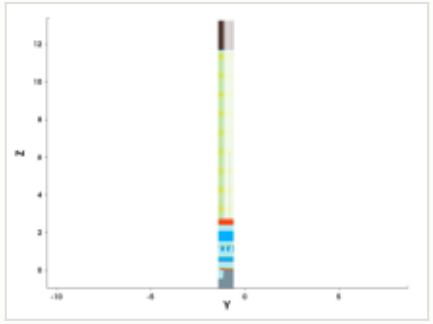

y cut at -1.035 µm

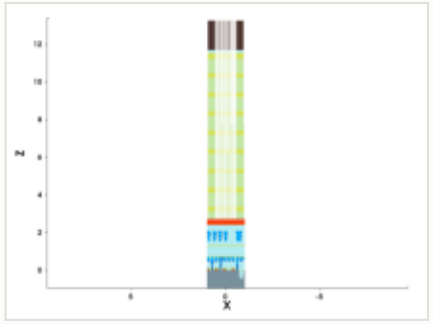

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

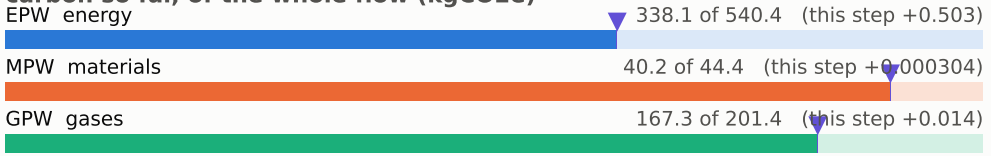


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

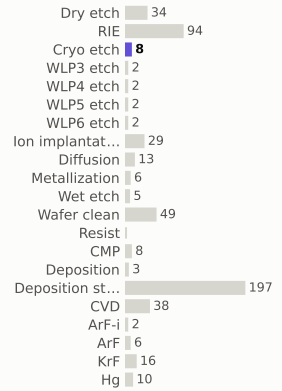

materials deposited (g)

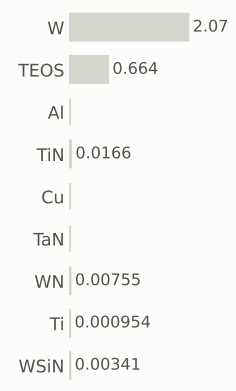

gases emitted (g)



Step #7280.4082: Cryo_etch


etch_noop · Cryo_etch

0.517	546.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




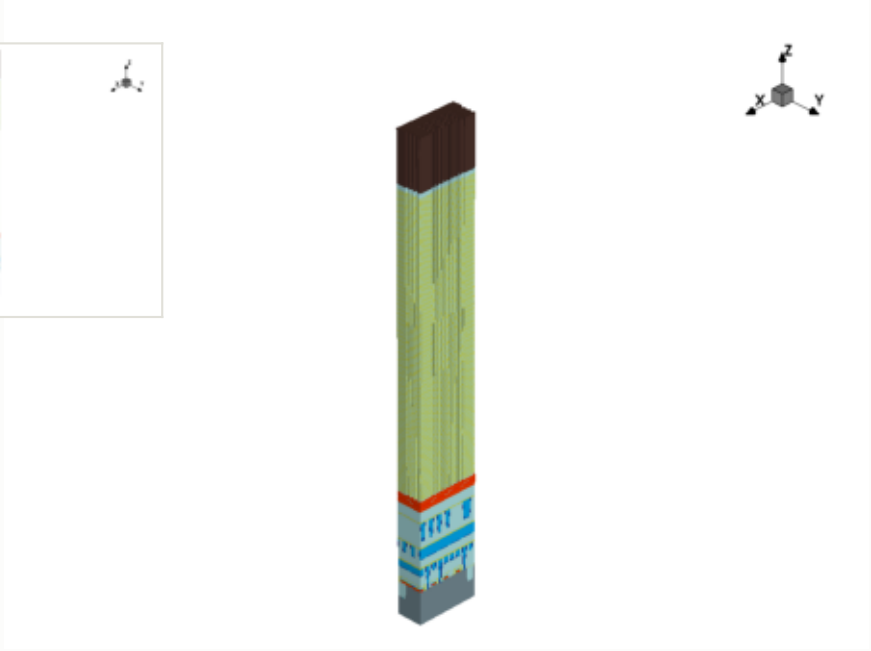

x cut at 0.000 µm

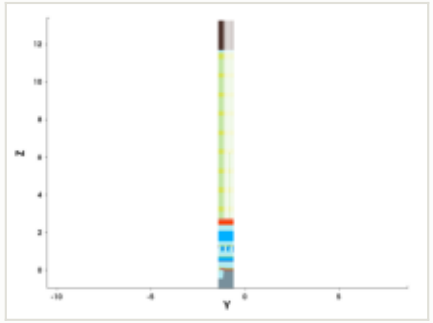

y cut at -1.035 µm

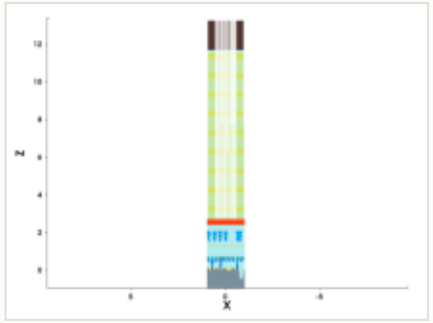

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

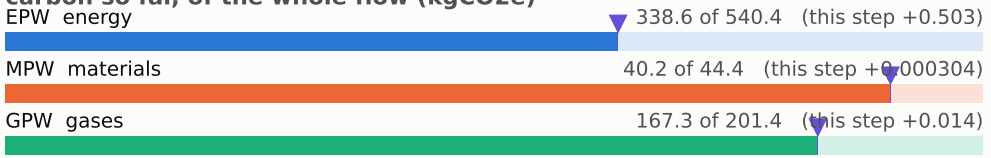


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

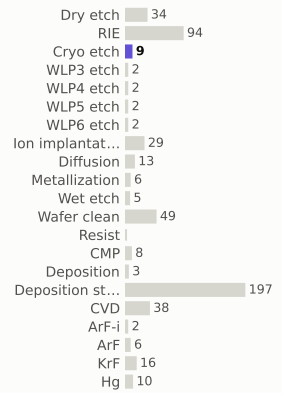

materials deposited (g)

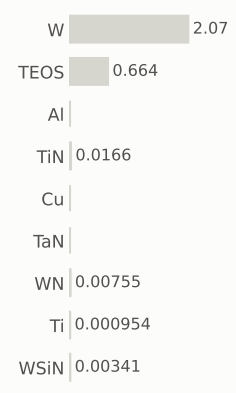

gases emitted (g)



Step #7280.4592: Cryo_etch


etch_noop · Cryo_etch

0.517	546.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




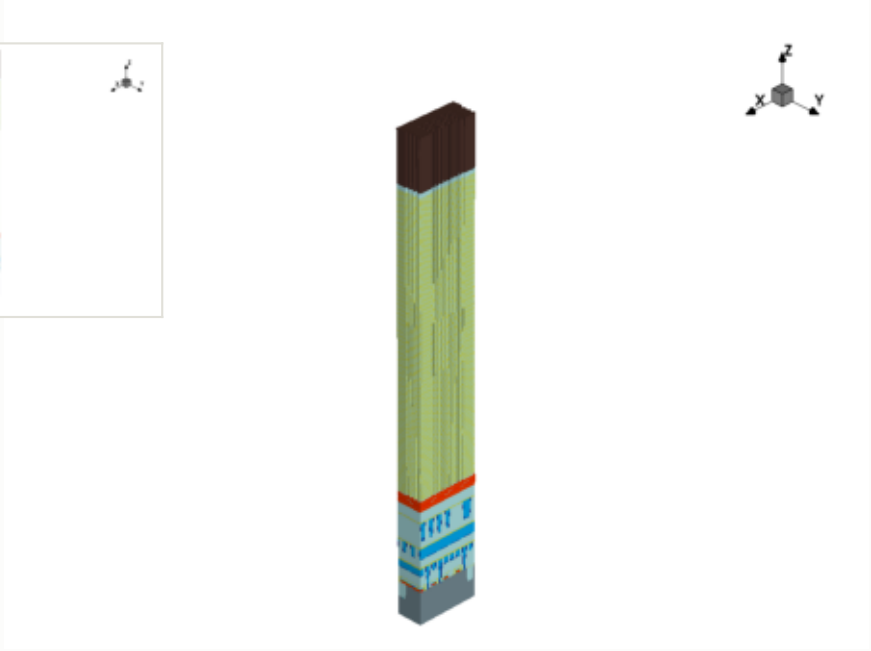

x cut at 0.000 µm

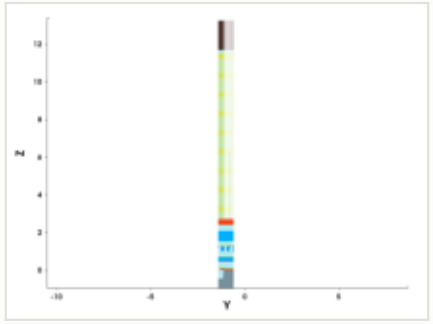

y cut at -1.035 µm

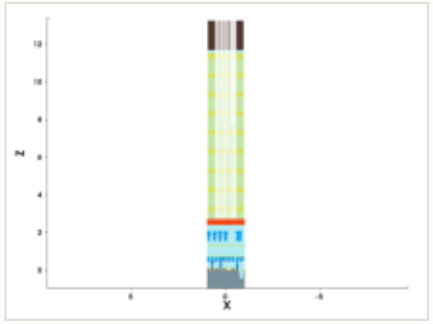

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

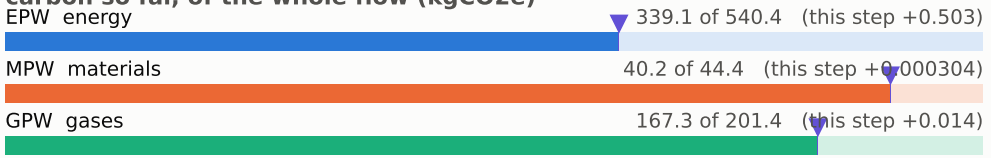


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

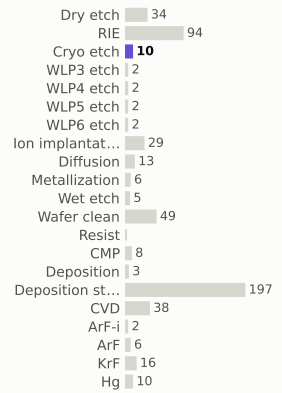

materials deposited (g)

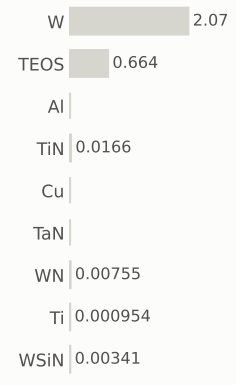

gases emitted (g)



Step #7280.5102: Cryo_etch


etch_noop · Cryo_etch

0.517	547.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




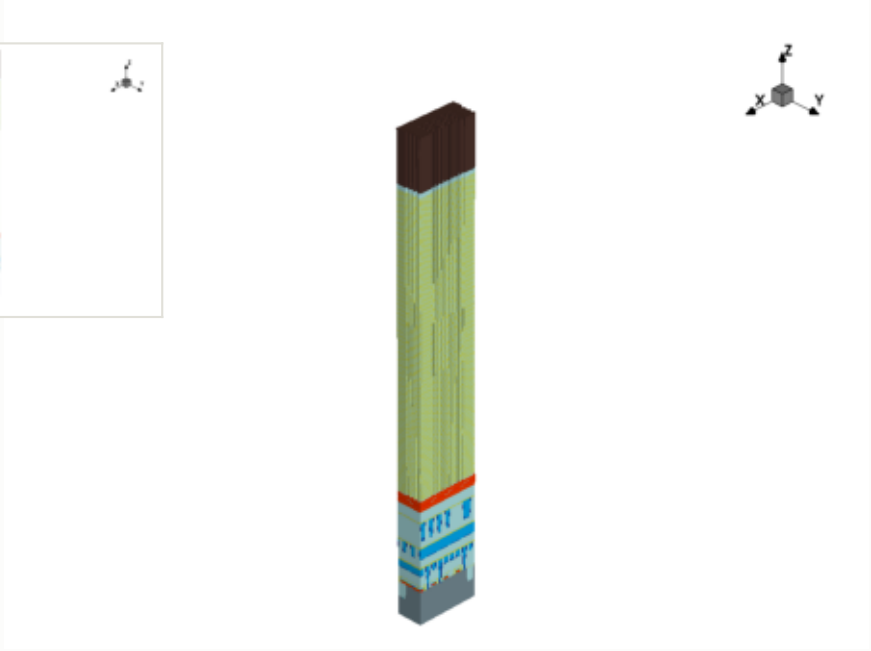

x cut at 0.000 µm

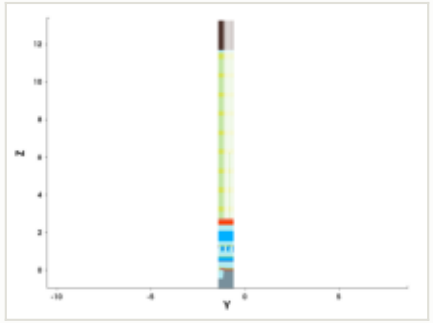

y cut at -1.035 µm

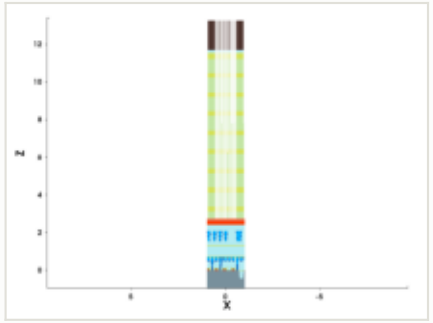

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

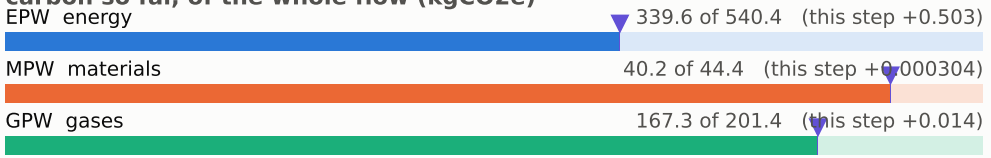


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

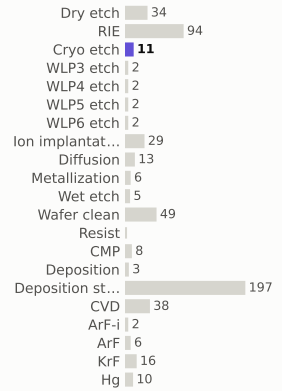

materials deposited (g)

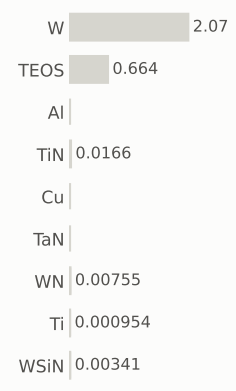

gases emitted (g)



Step #7280.5612: Cryo_etch

etch_noop · Cryo_etch

0.517	547.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

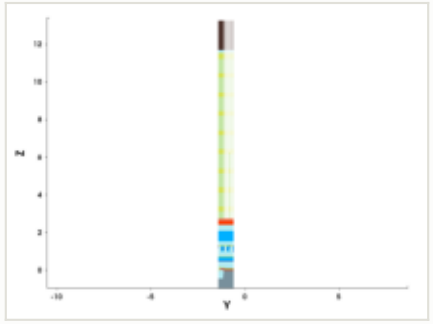

y cut at -1.035 µm

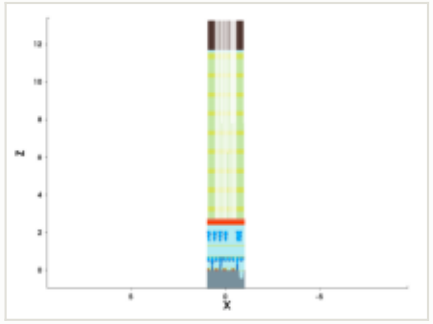

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

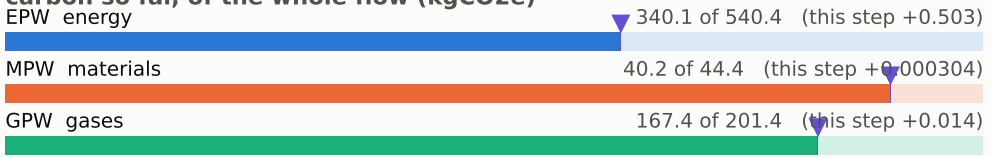


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

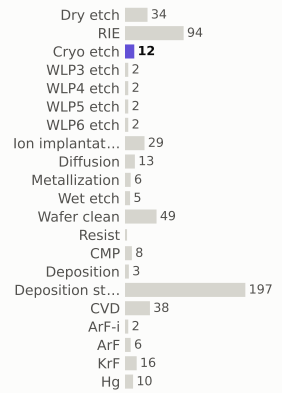

materials deposited (g)

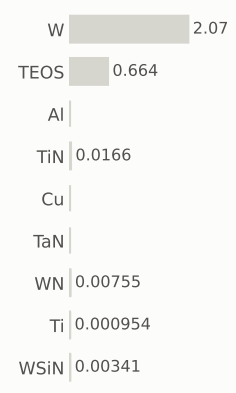

gases emitted (g)



Step #7280.6122: Cryo_etch


etch_noop · Cryo_etch

0.517	548.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




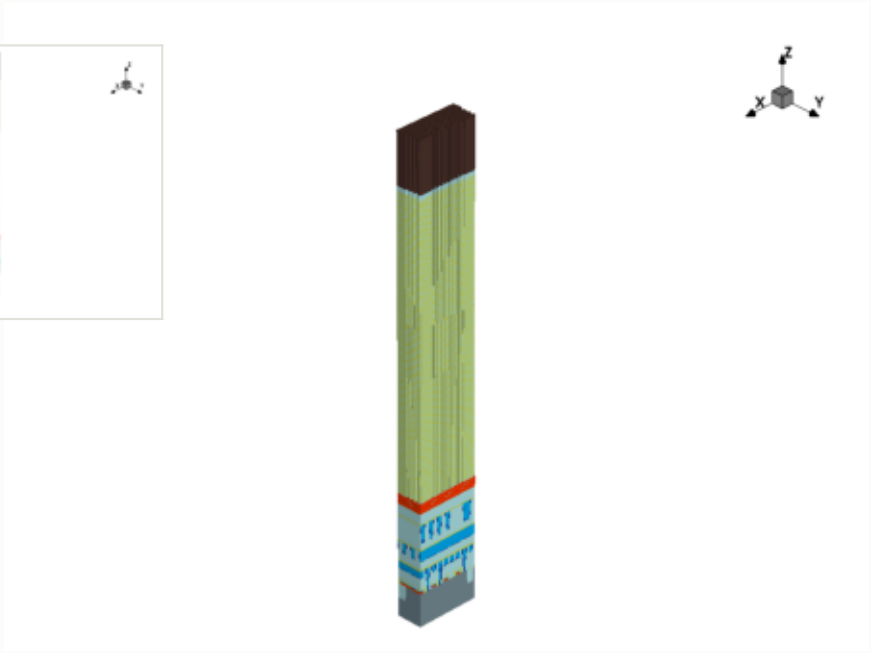

x cut at 0.000 µm

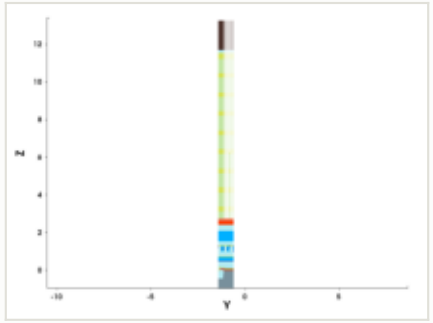

y cut at -1.035 µm

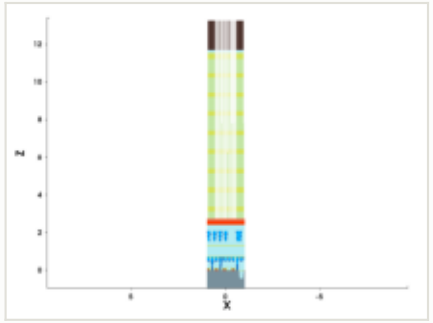

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

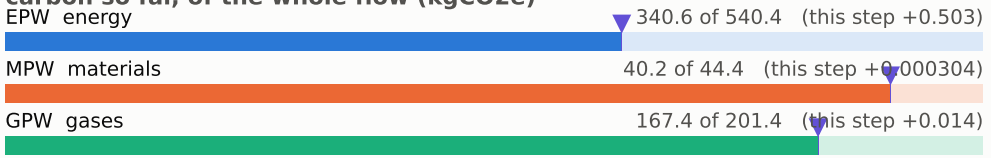


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

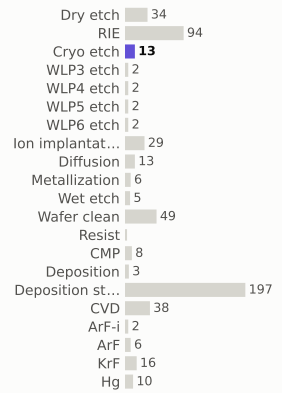

materials deposited (g)

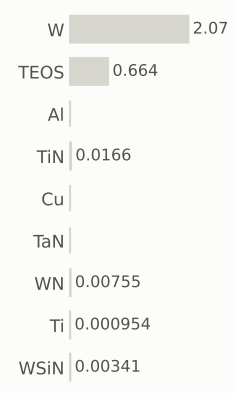

gases emitted (g)



Step #7280.6633: Cryo_etch


etch_noop · Cryo_etch

0.517	548.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




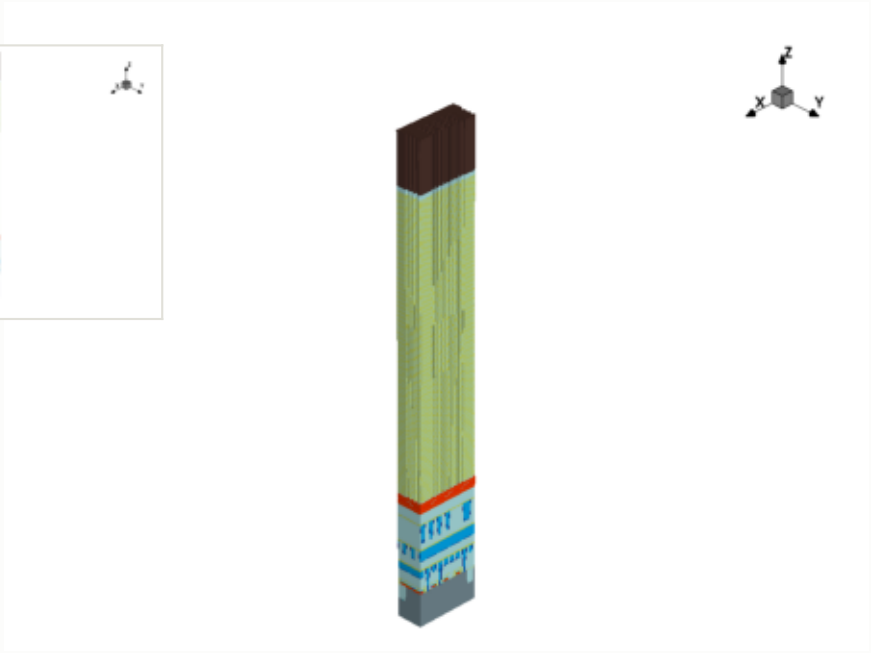

x cut at 0.000 µm

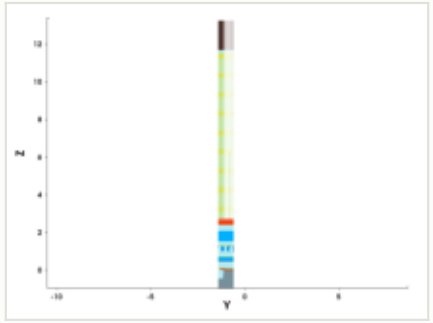

y cut at -1.035 µm

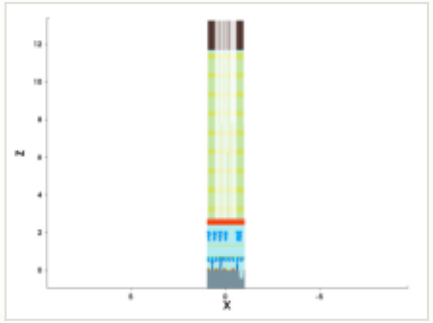

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

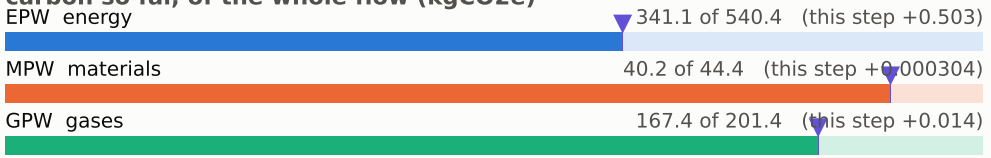


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

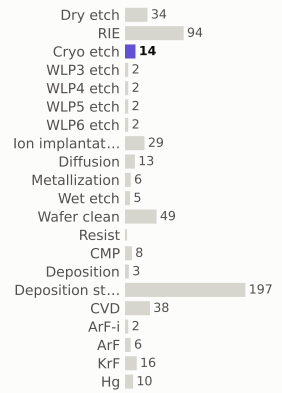

materials deposited (g)

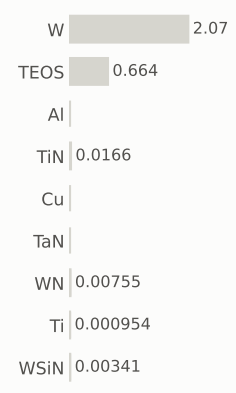

gases emitted (g)



Step #7280.7143: Cryo_etch


etch_noop · Cryo_etch

0.517	549.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




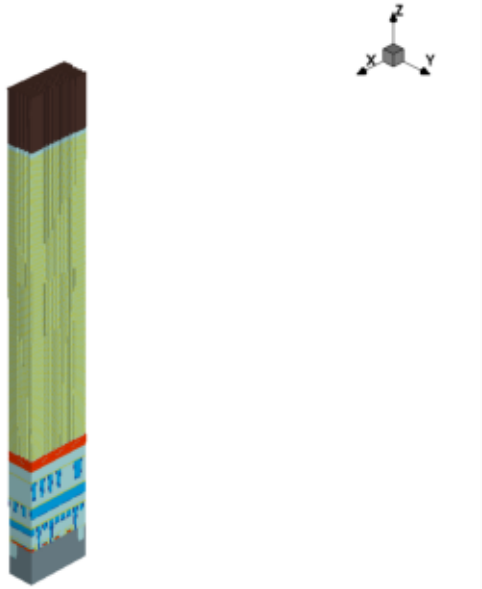

x cut at 0.000 µm

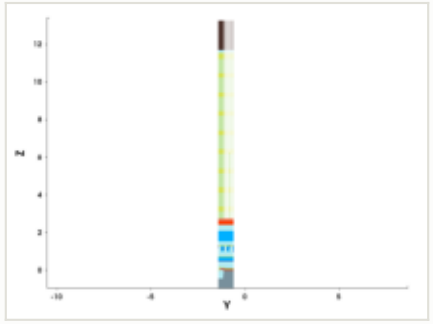

y cut at -1.035 µm

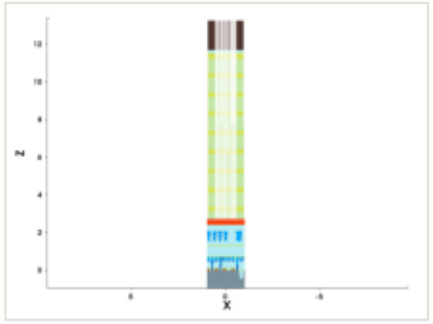

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

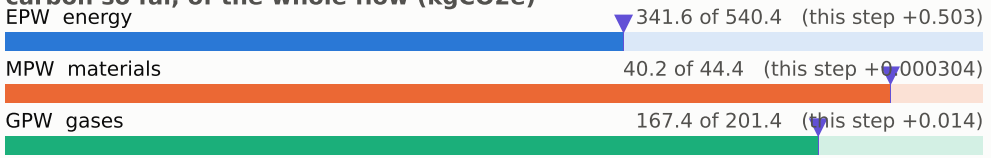


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

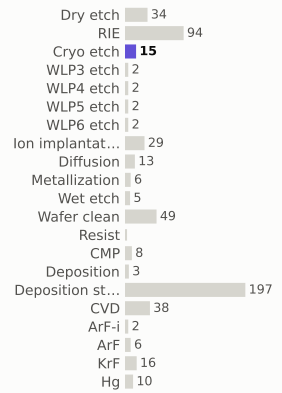

materials deposited (g)

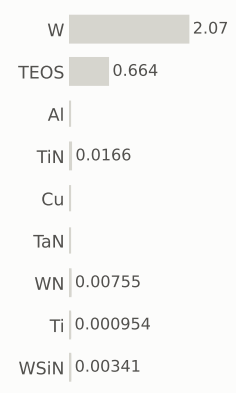

gases emitted (g)



Step #7280.7653: Cryo_etch


etch_noop · Cryo_etch

0.517	549.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




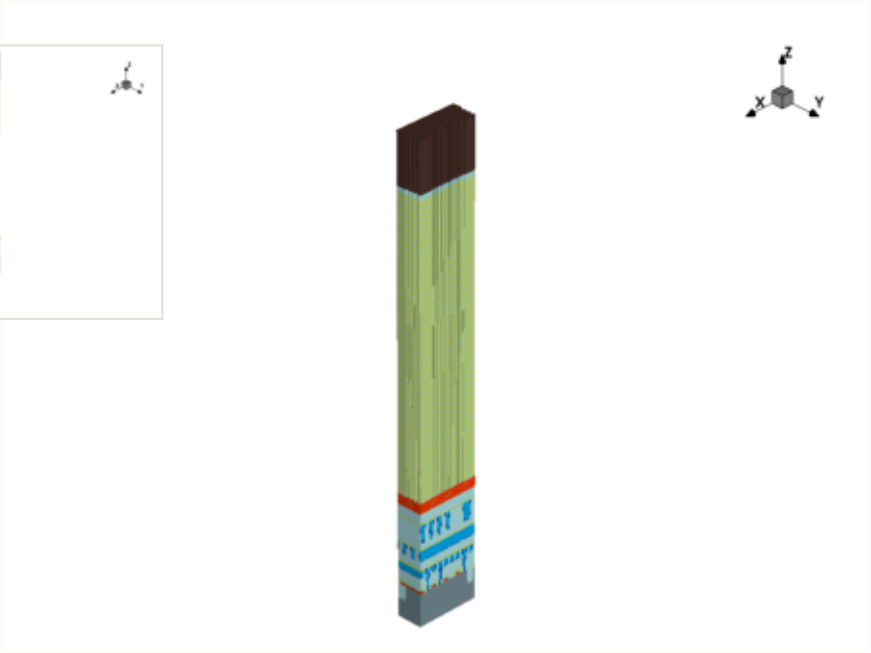

x cut at 0.000 µm

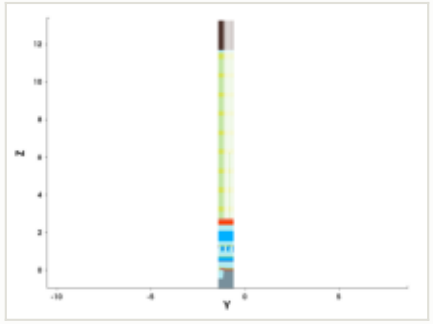

y cut at -1.035 µm

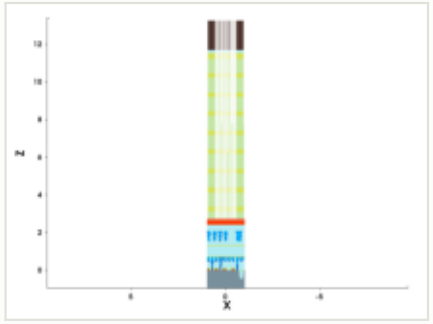

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

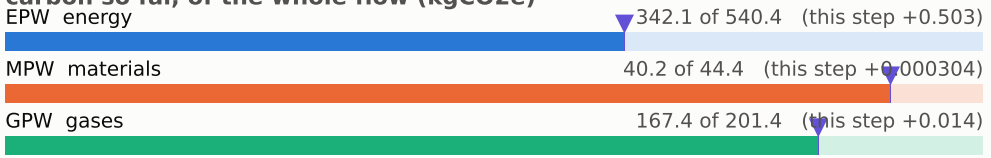


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

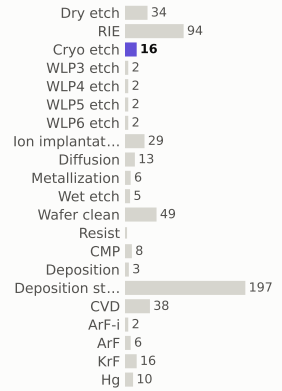

materials deposited (g)

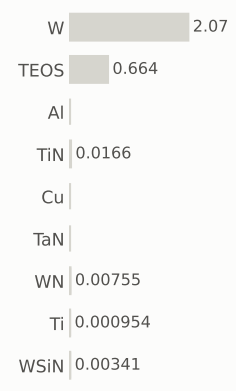

gases emitted (g)



Step #7280.8163: Cryo_etch

etch_noop · Cryo_etch

0.517	550.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

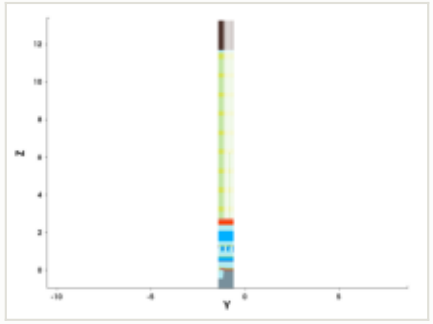

y cut at -1.035 µm

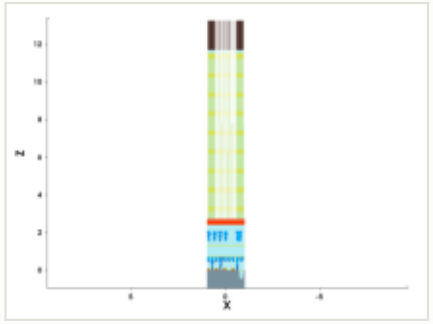

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

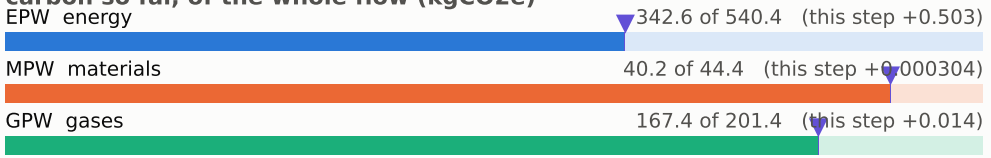


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

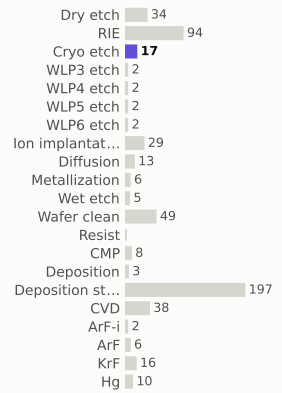

materials deposited (g)

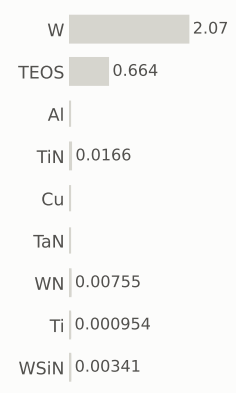

gases emitted (g)



Step #7280.8673: Cryo_etch


etch_noop · Cryo_etch

0.517	550.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




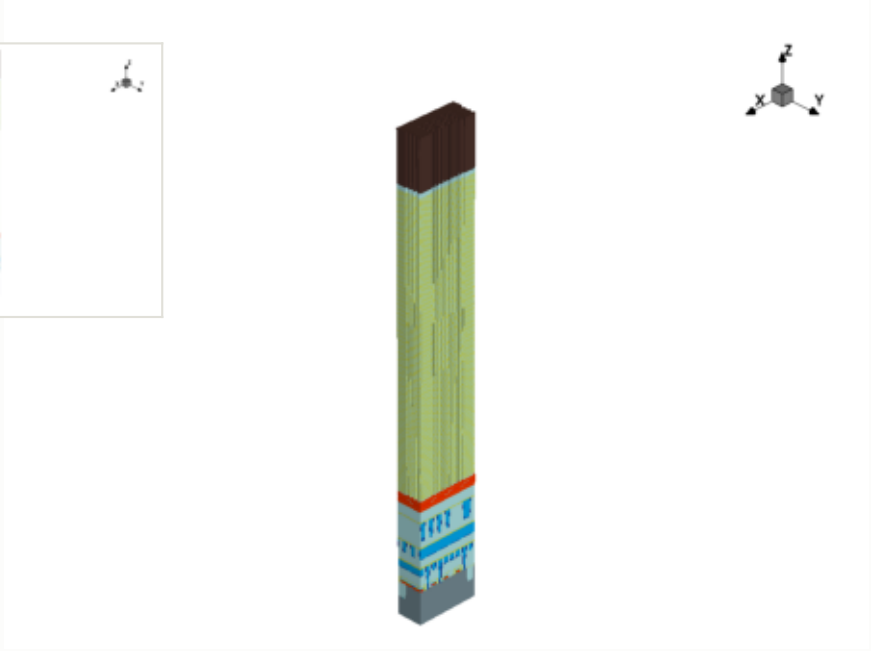

x cut at 0.000 µm

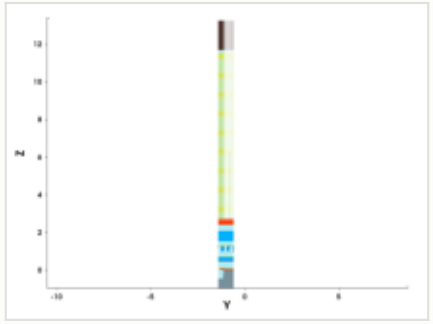

y cut at -1.035 µm

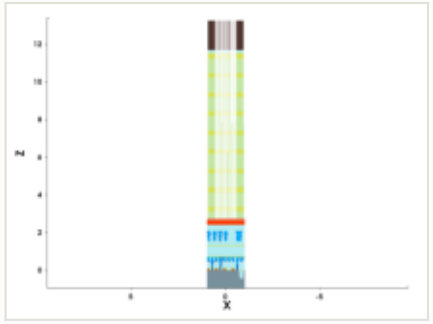

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

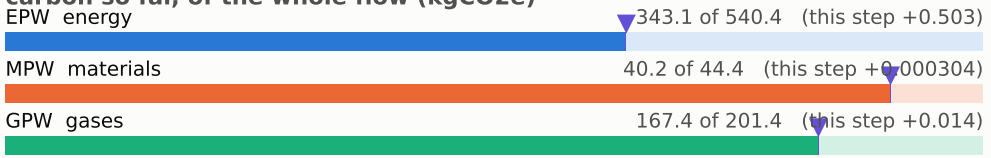


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

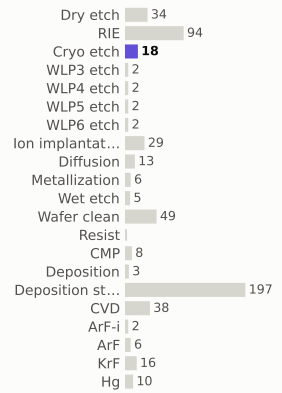

materials deposited (g)

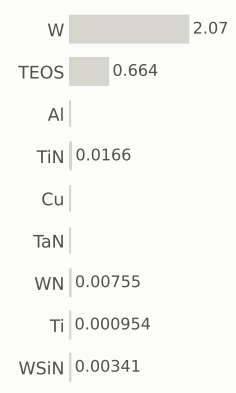

gases emitted (g)



Step #7280.9184: Cryo_etch

etch_noop · Cryo_etch

0.517	551.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

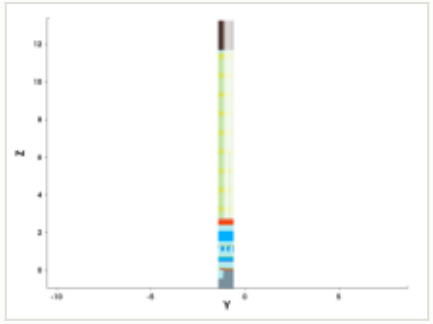

y cut at -1.035 µm

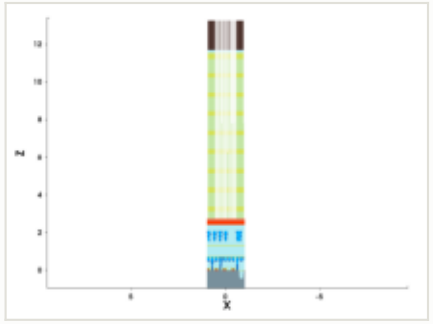

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

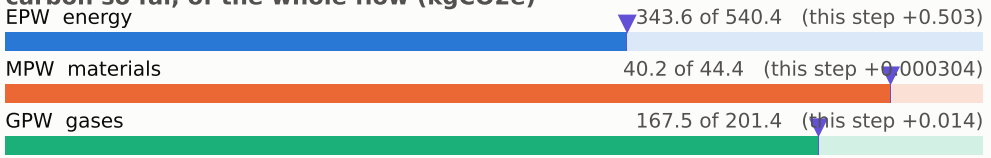


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

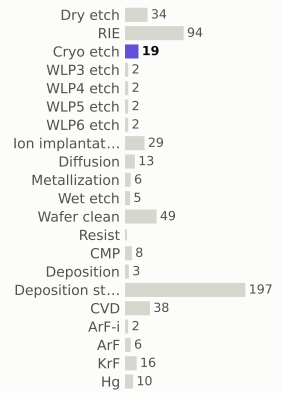

materials deposited (g)

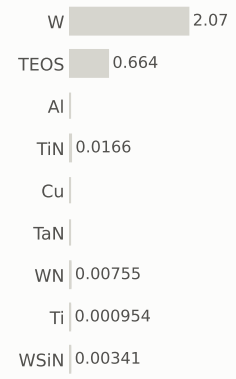

gases emitted (g)



Step #7280.9694: Cryo_etch


etch_noop · Cryo_etch

0.517	551.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




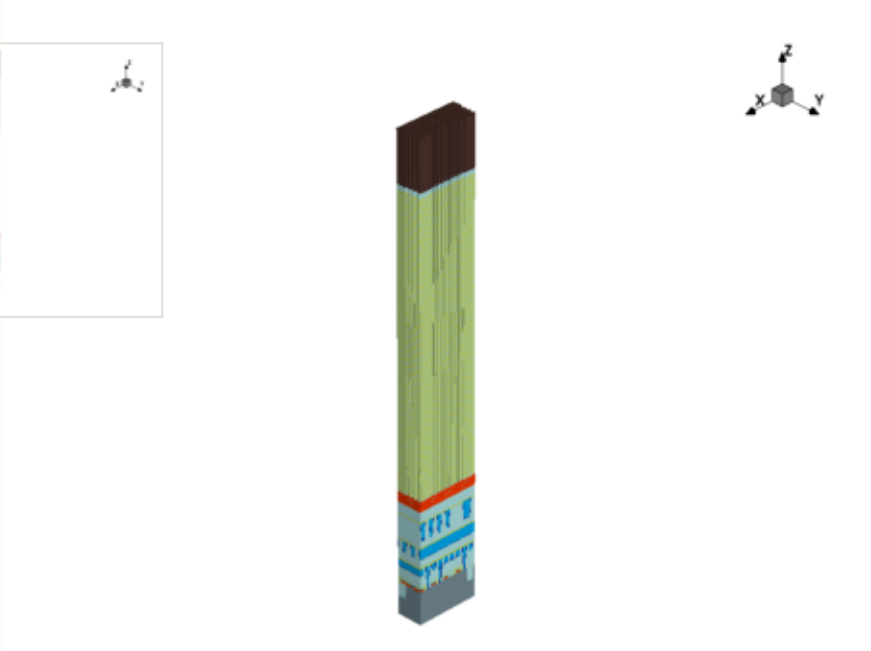

x cut at 0.000 µm

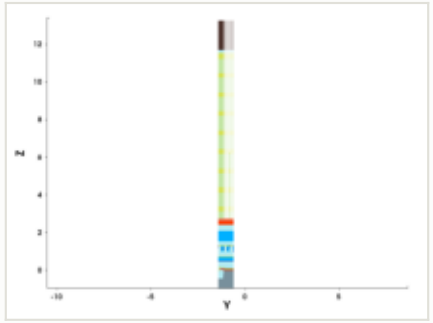

y cut at -1.035 µm

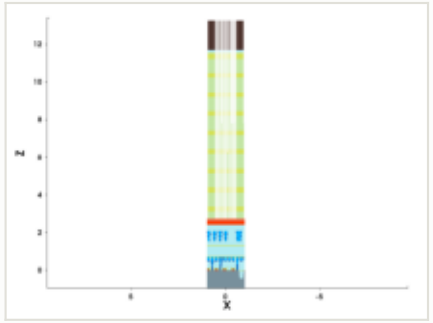

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

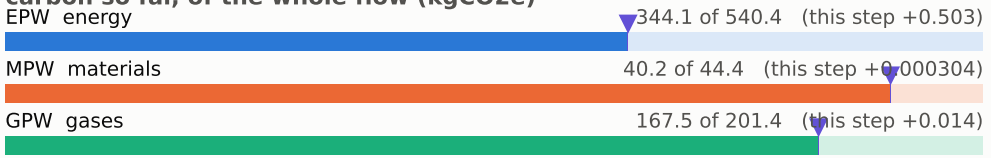


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

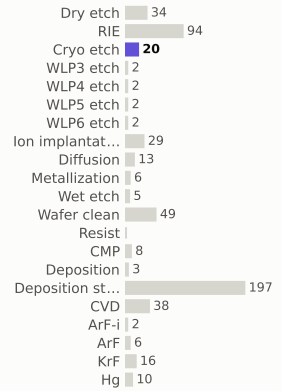

materials deposited (g)

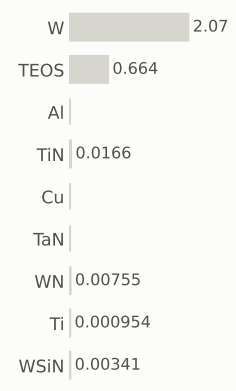

gases emitted (g)



Step #7281.0204: Cryo_etch


etch_noop · Cryo_etch

0.517	552.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




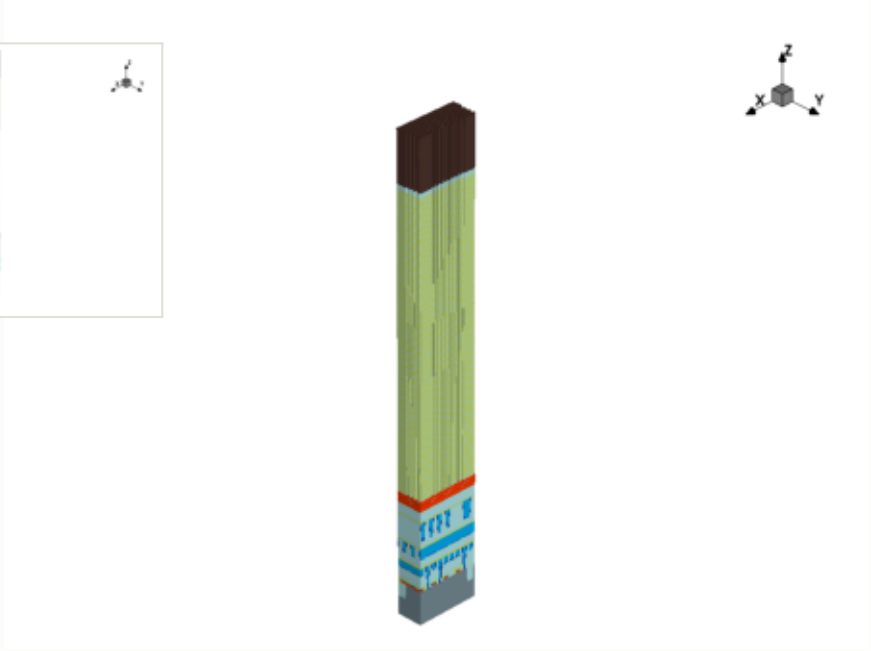

x cut at 0.000 µm

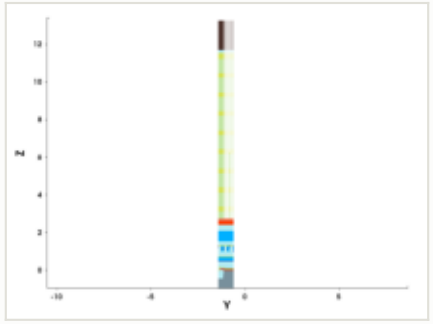

y cut at -1.035 µm

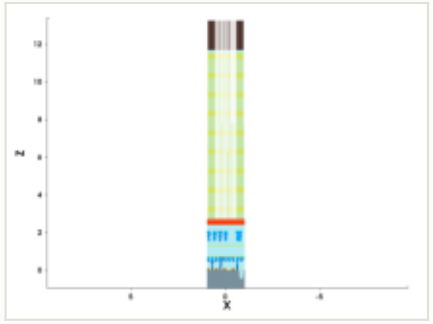

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

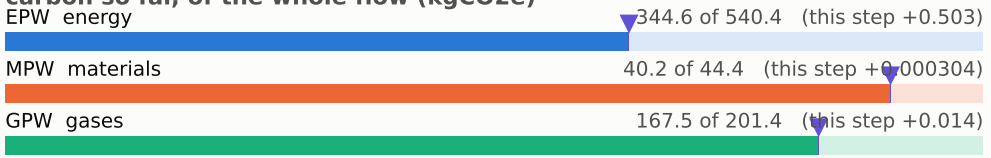


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

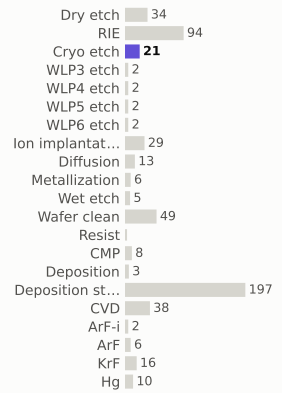

materials deposited (g)

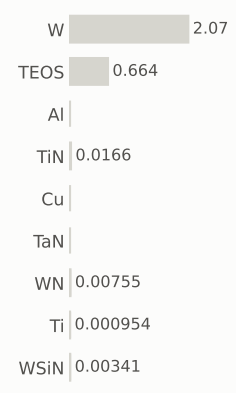

gases emitted (g)



Step #7281.0714: Cryo_etch


etch_noop · Cryo_etch

0.517	552.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




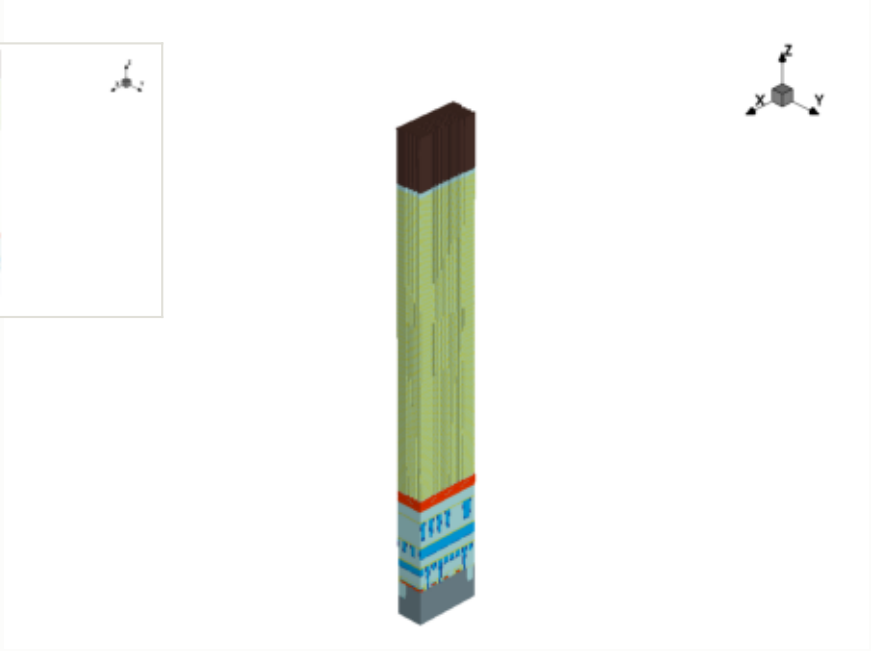

x cut at 0.000 µm

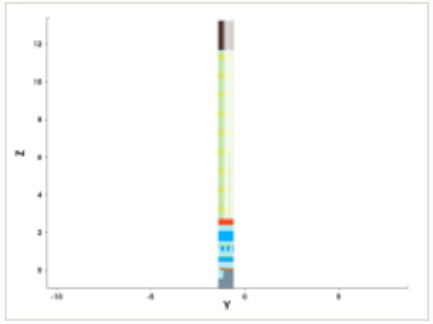

y cut at -1.035 µm

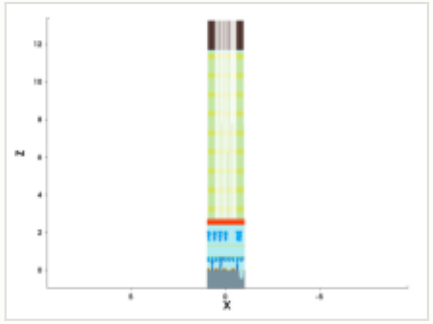

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

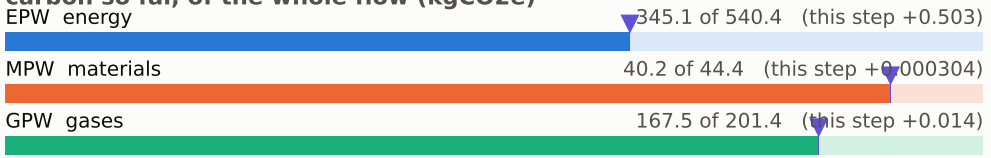


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

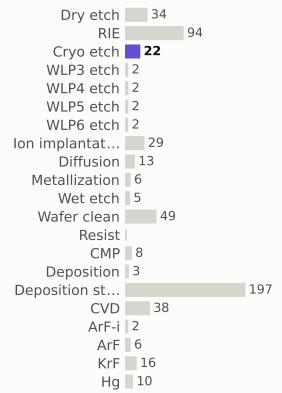

materials deposited (g)

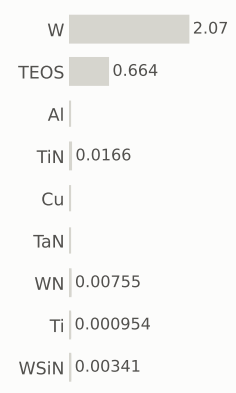

gases emitted (g)



Step #7281.1224: Cryo_etch


etch_noop · Cryo_etch

0.517	553.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




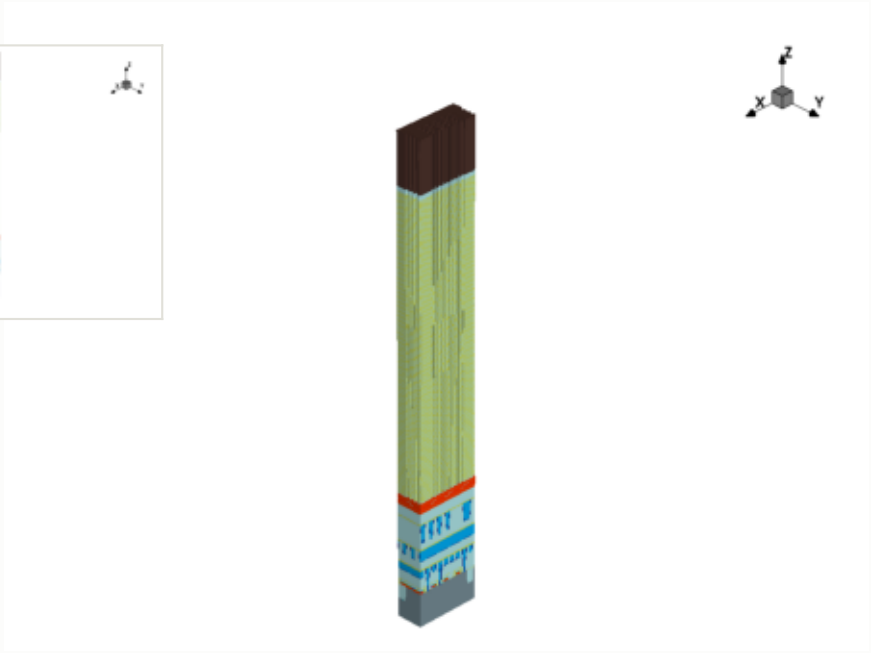

x cut at 0.000 µm

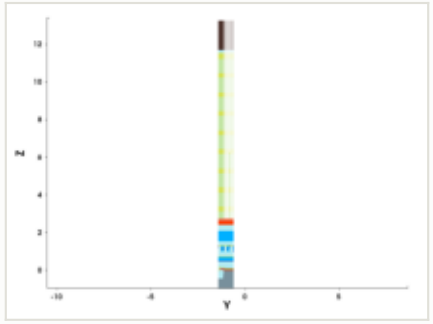

y cut at -1.035 µm

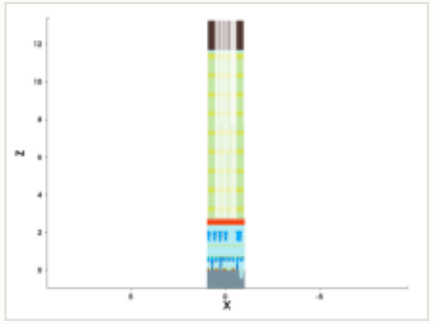

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

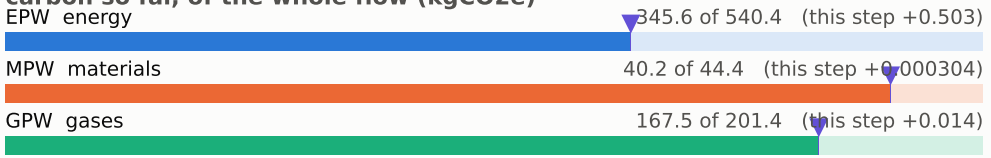


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

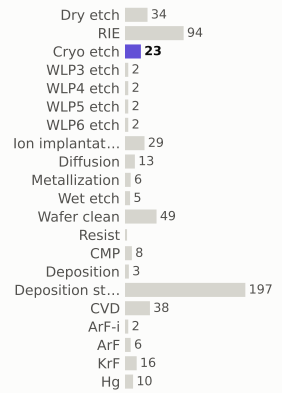

materials deposited (g)

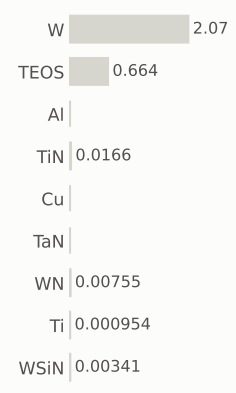

gases emitted (g)



Step #7281.1735: Cryo_etch


etch_noop · Cryo_etch

0.517	553.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




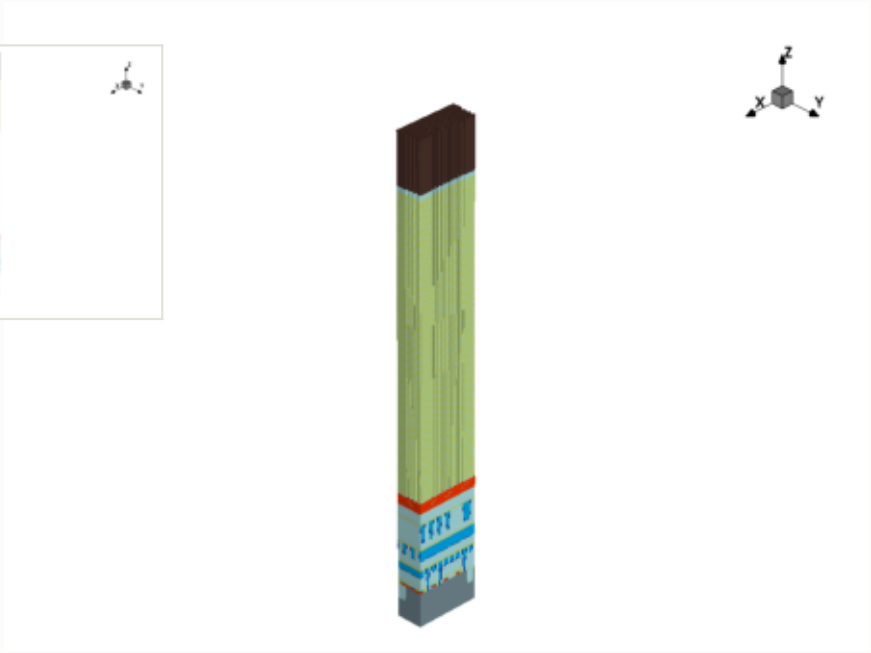

x cut at 0.000 µm

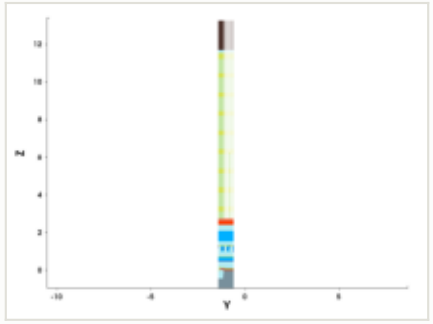

y cut at -1.035 µm

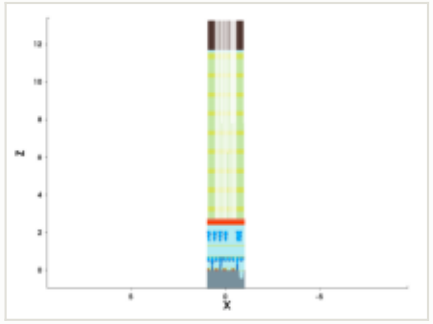

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

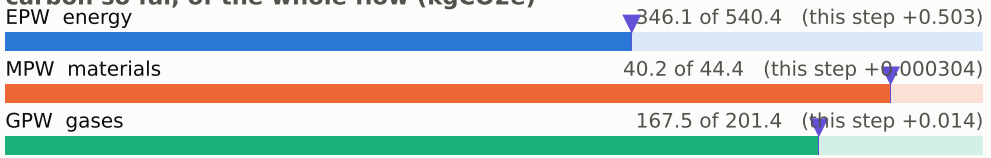


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

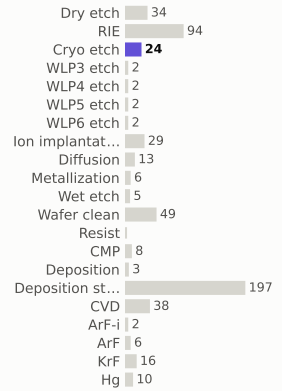

materials deposited (g)

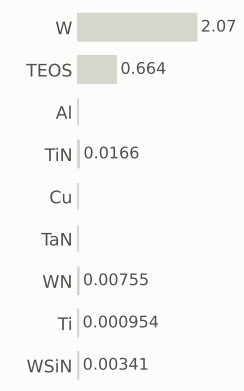

gases emitted (g)



Step #7281.2245: Cryo_etch


etch_noop · Cryo_etch

0.517	554.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




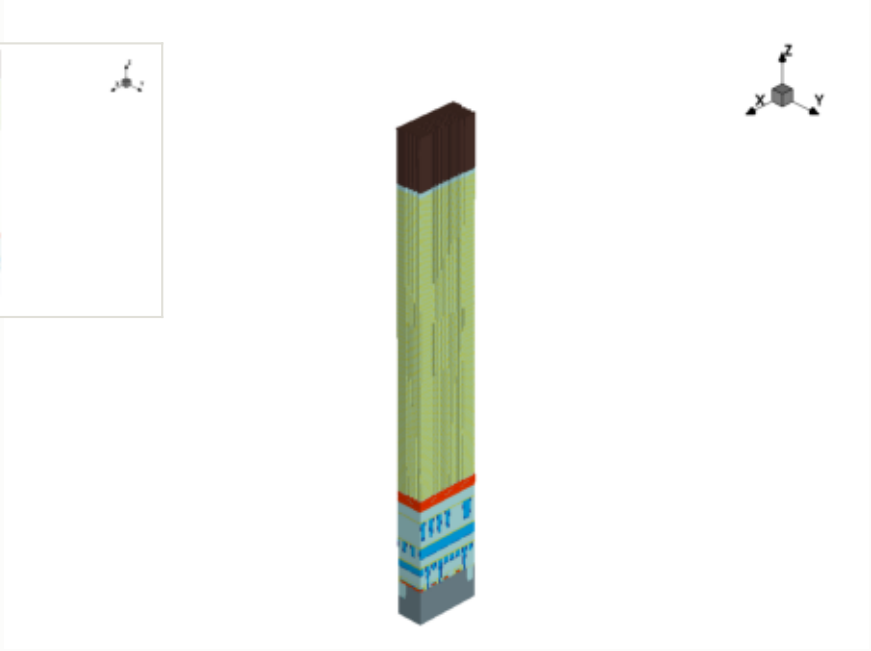

x cut at 0.000 µm

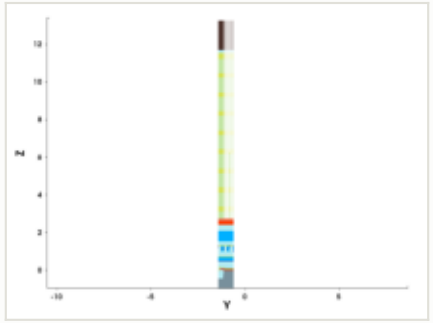

y cut at -1.035 µm

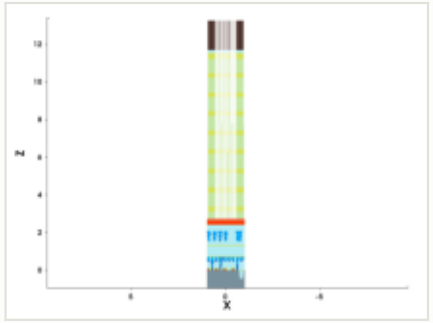

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

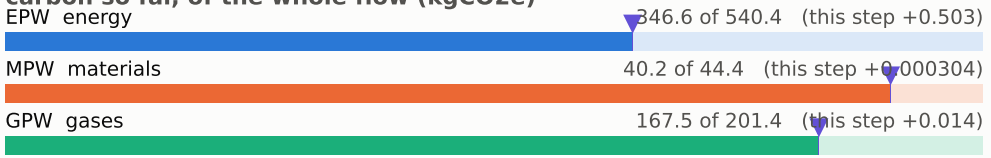


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

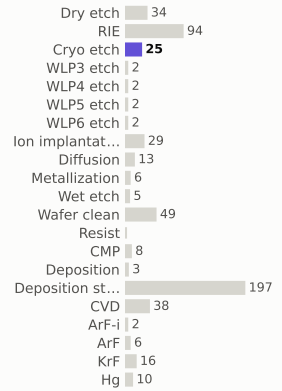

materials deposited (g)

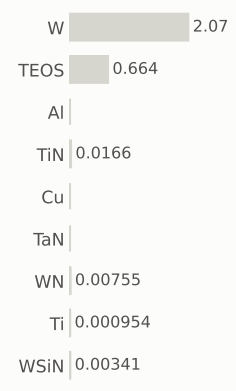

gases emitted (g)



Step #7281.2755: Cryo_etch


etch_noop · Cryo_etch

0.517	554.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




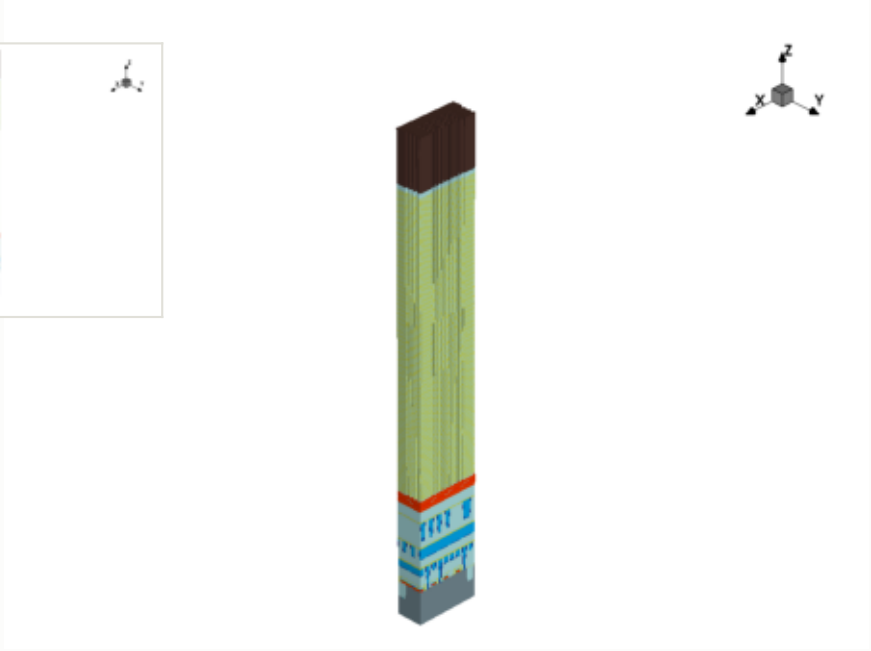

x cut at 0.000 µm

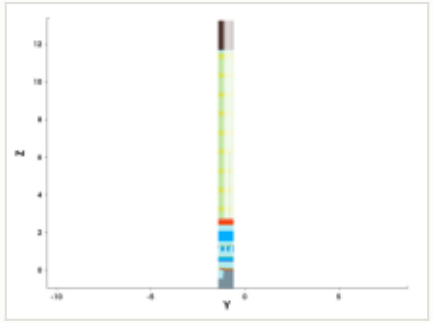

y cut at -1.035 µm

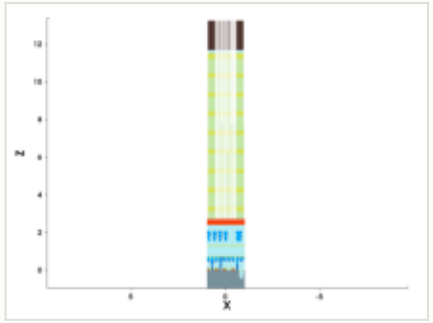

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

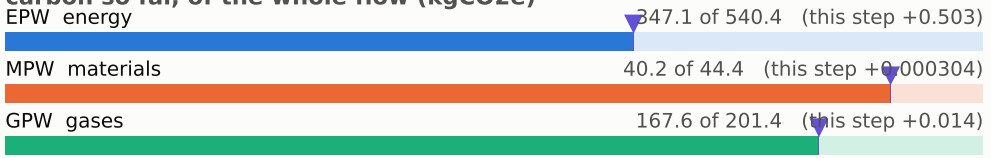


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

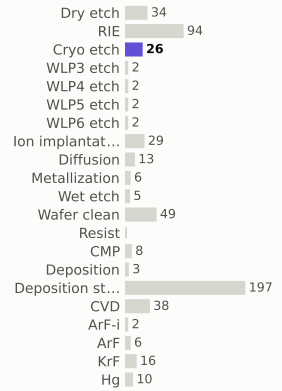

materials deposited (g)

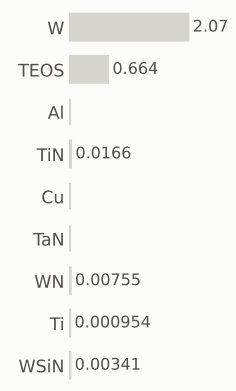

gases emitted (g)



Step #7281.3265: Cryo_etch


etch_noop · Cryo_etch

0.517	555.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




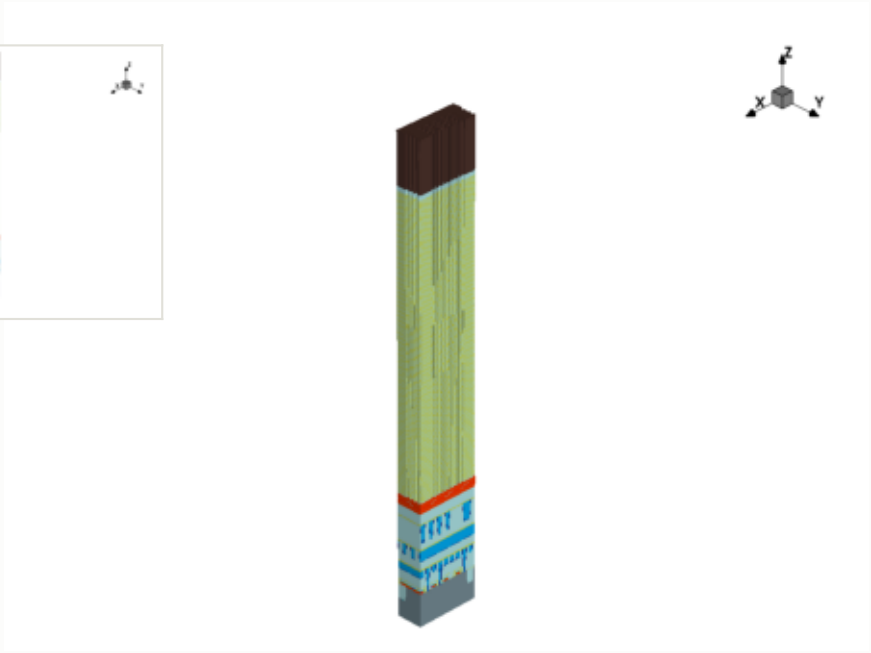

x cut at 0.000 µm

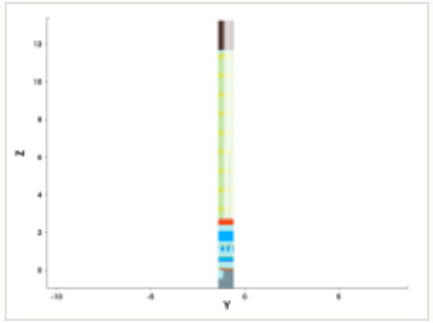

y cut at -1.035 µm

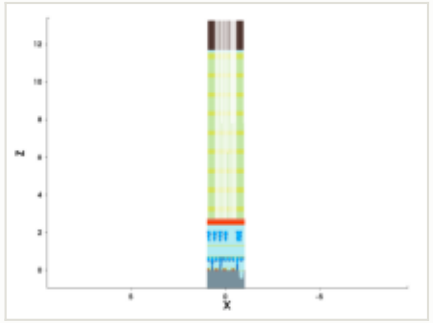

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

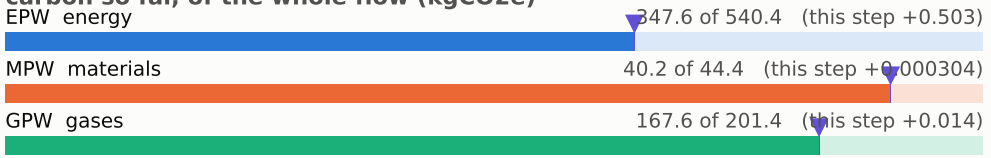


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

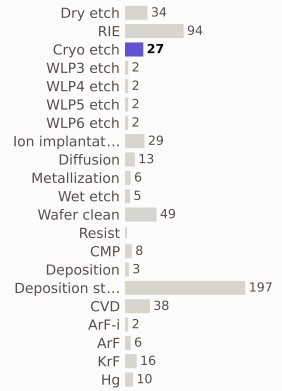

materials deposited (g)

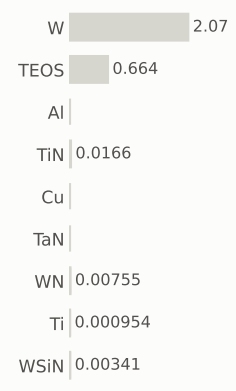

gases emitted (g)



Step #7281.3776: Cryo_etch


etch_noop · Cryo_etch

0.517	556.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




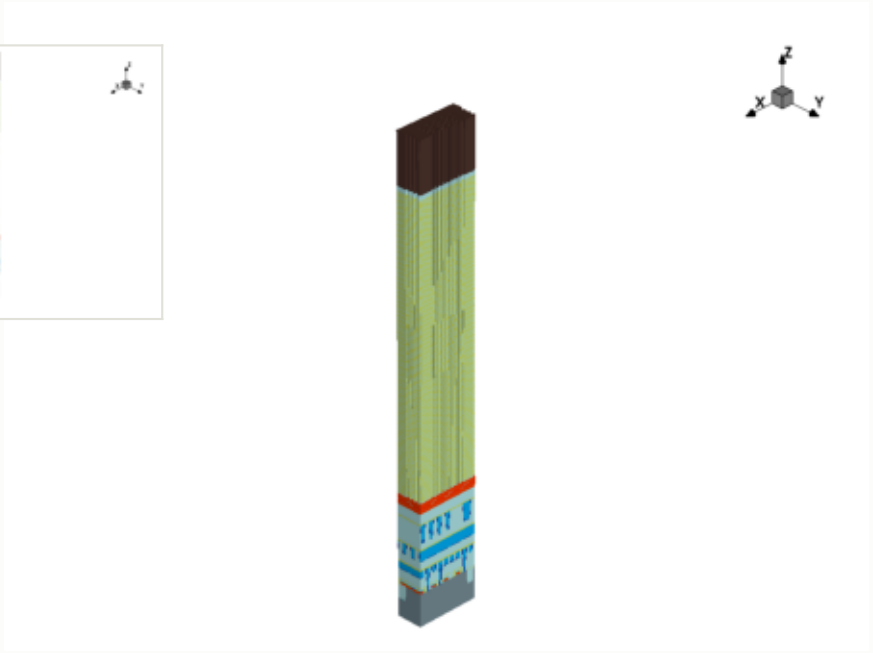

x cut at 0.000 µm

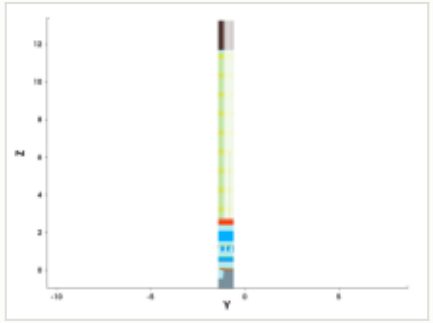

y cut at -1.035 µm

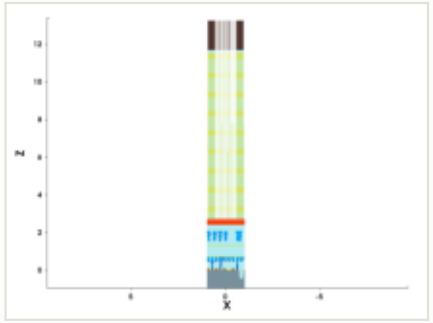

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

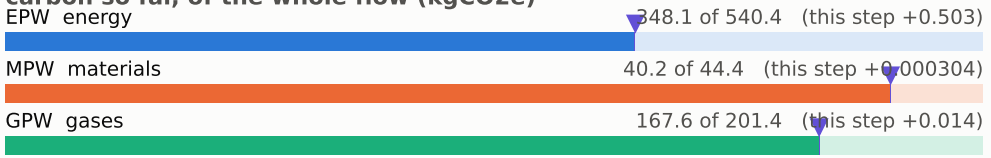


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

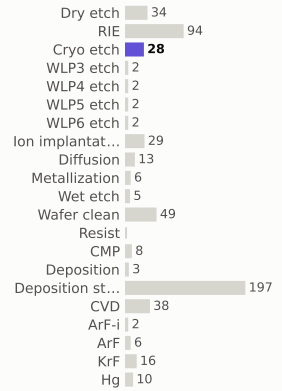

materials deposited (g)

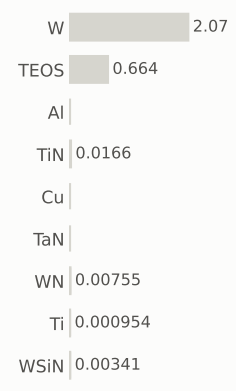

gases emitted (g)



Step #7281.4286: Cryo_etch


etch_noop · Cryo_etch

0.517	556.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




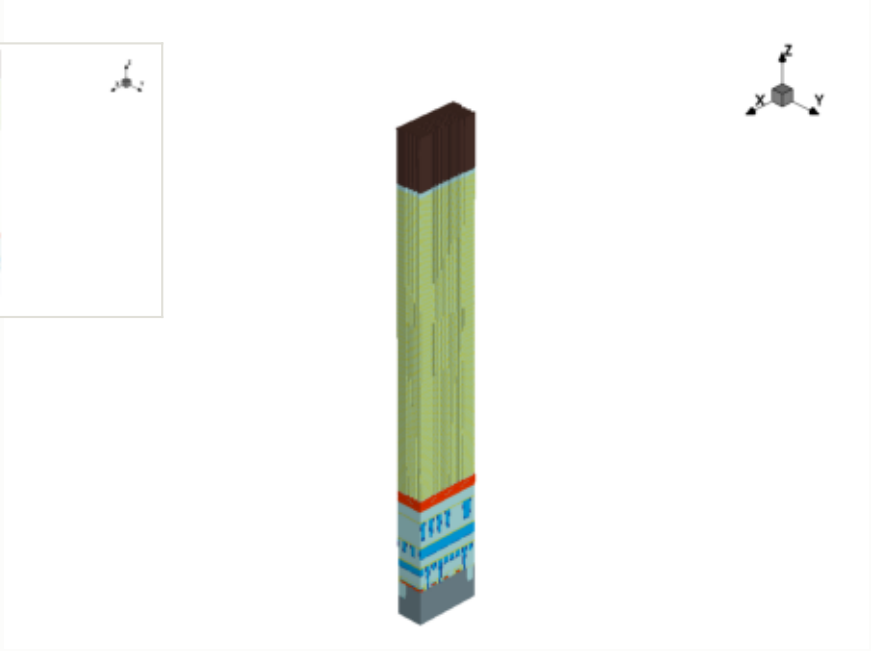

x cut at 0.000 µm

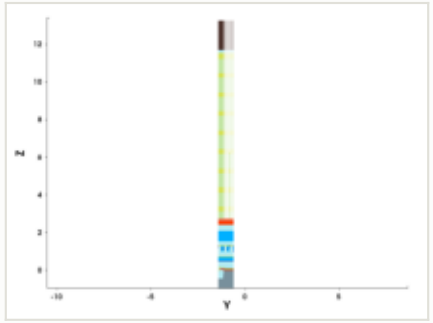

y cut at -1.035 µm

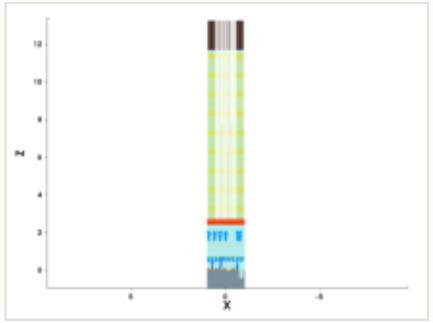

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

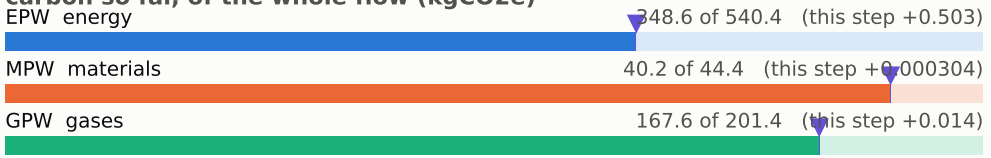


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

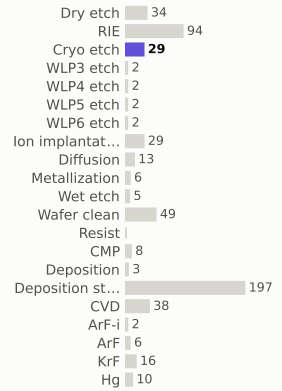

materials deposited (g)

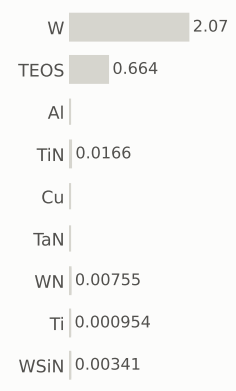

gases emitted (g)



Step #7281.4796: Cryo_etch


etch_noop · Cryo_etch

0.517	557.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




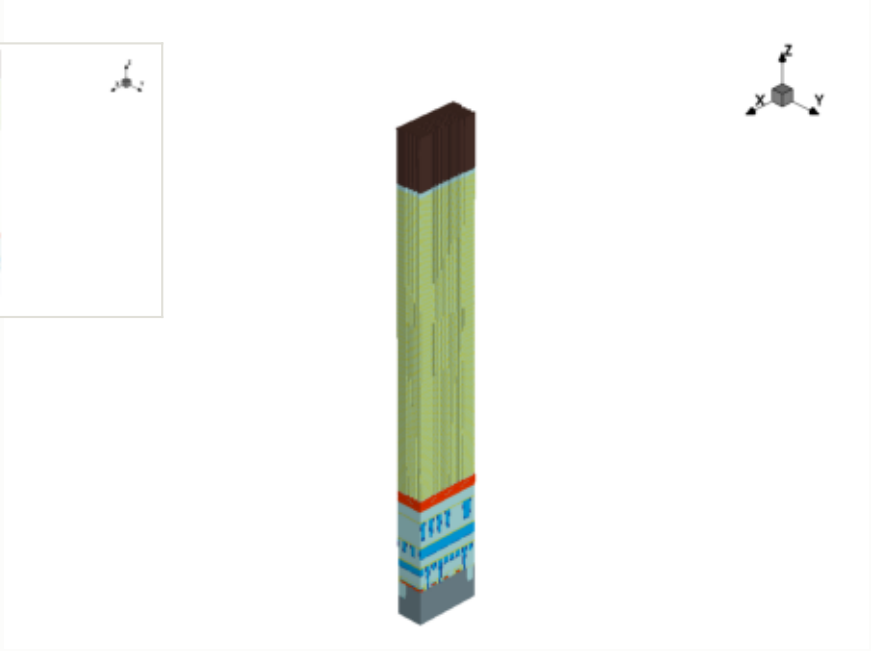

x cut at 0.000 µm

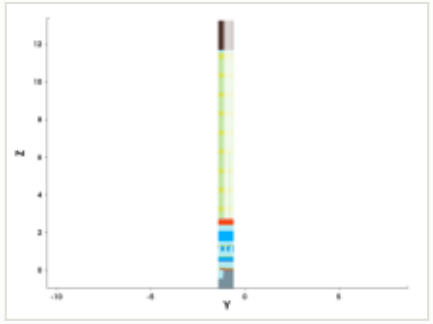

y cut at -1.035 µm

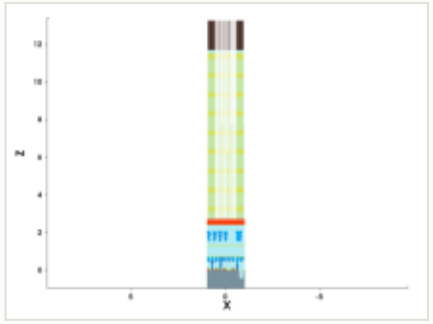

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

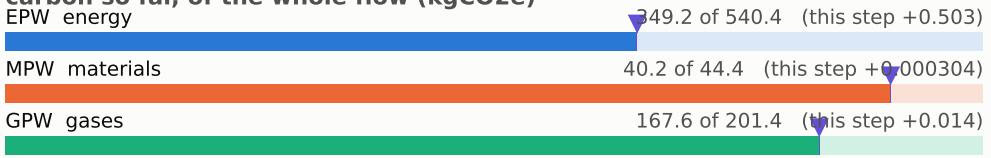


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

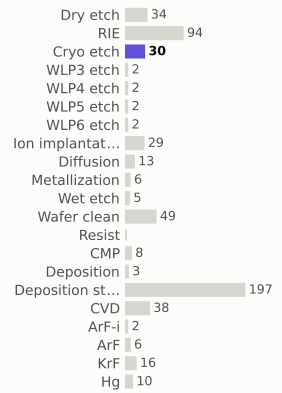

materials deposited (g)

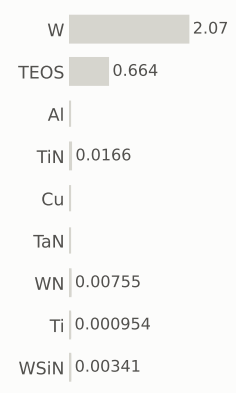

gases emitted (g)



Step #7281.5306: Cryo_etch


etch_noop · Cryo_etch

0.517	557.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




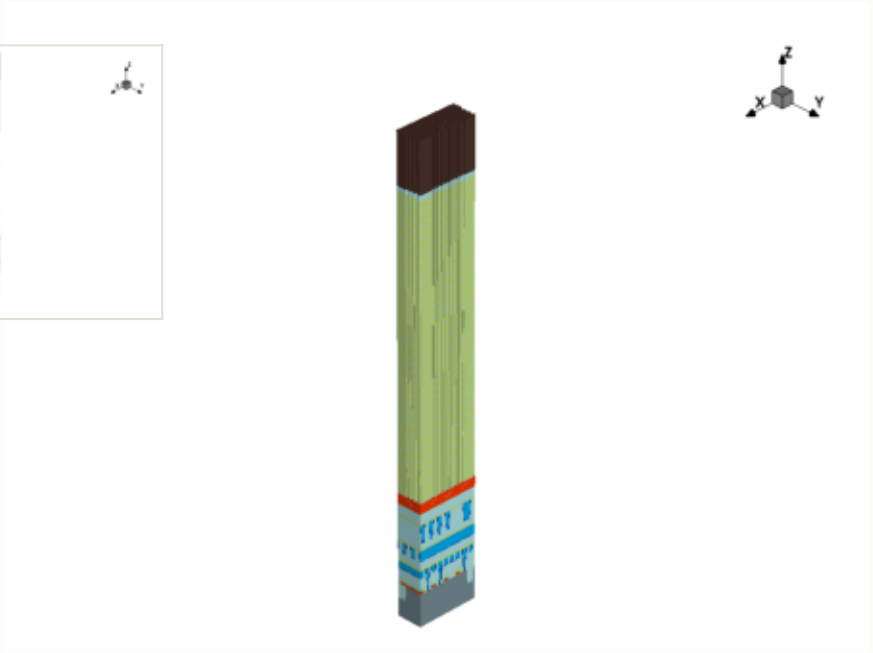

x cut at 0.000 µm

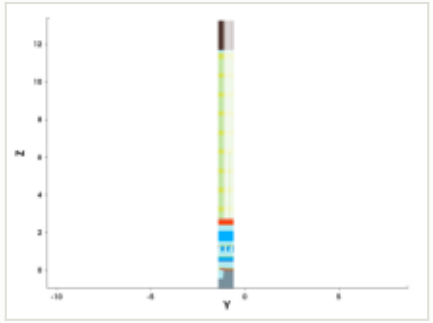

y cut at -1.035 µm

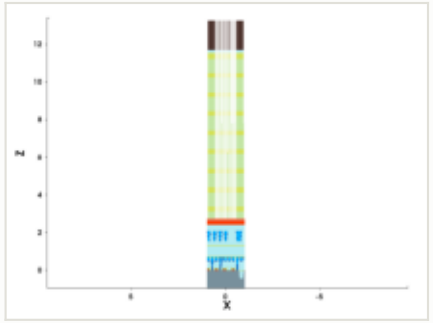

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

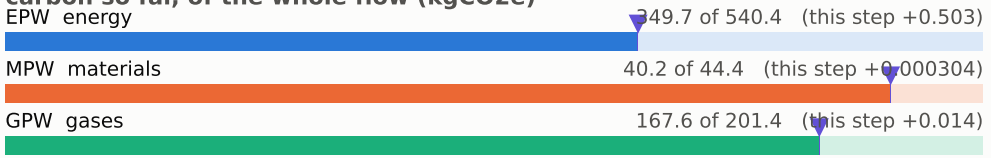


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

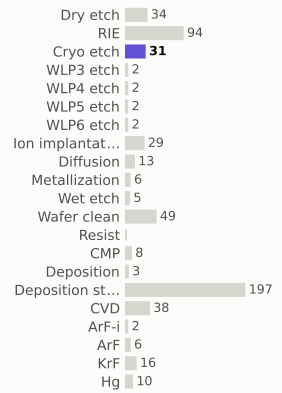

materials deposited (g)

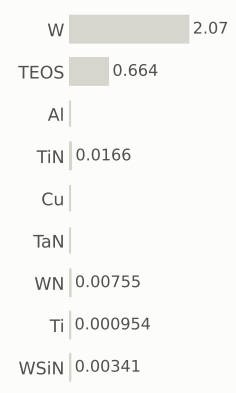

gases emitted (g)



Step #7281.5816: Cryo_etch


etch_noop · Cryo_etch

0.517	558.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



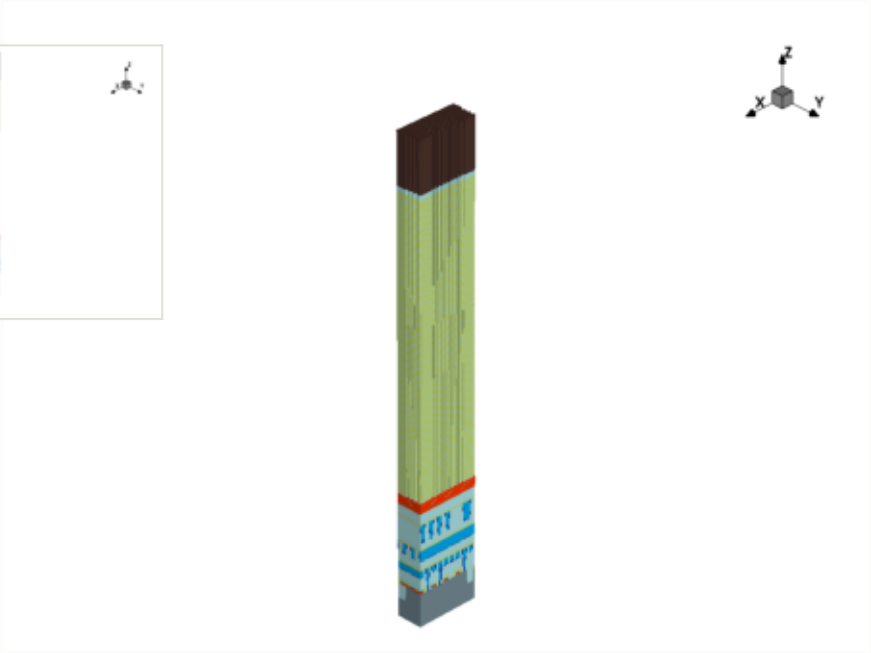


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

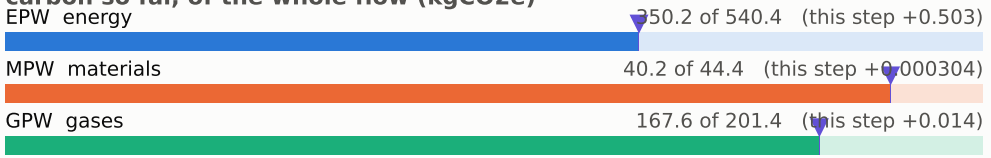


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

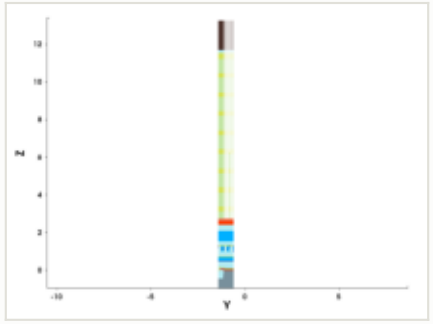


y cut at -1.035 µm

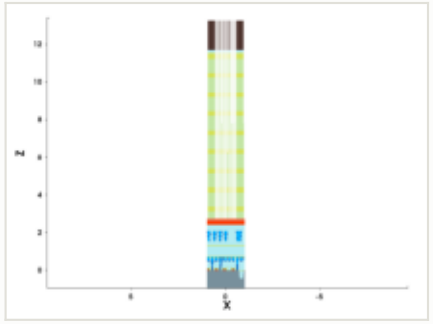


mask for this step

no mask for this step


steps by process area

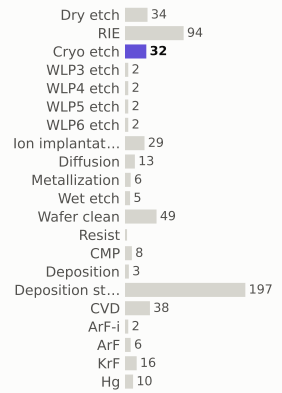

materials deposited (g)

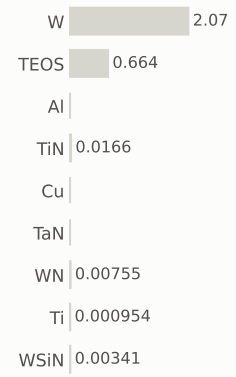

gases emitted (g)



Step #7281.6327: Cryo_etch


etch_noop · Cryo_etch

0.517	558.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




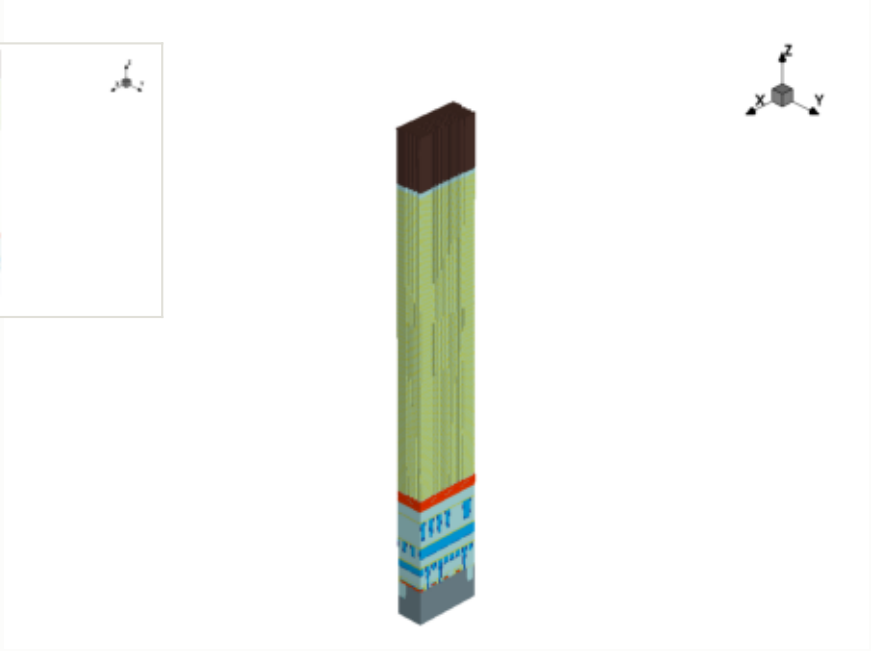

x cut at 0.000 µm

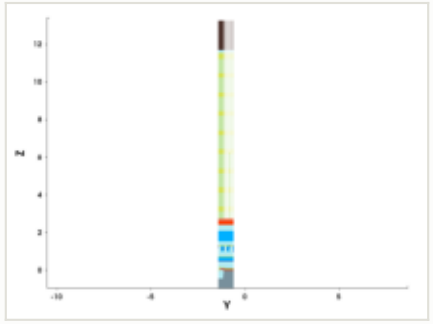

y cut at -1.035 µm

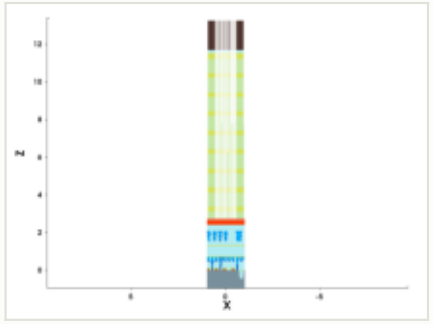

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

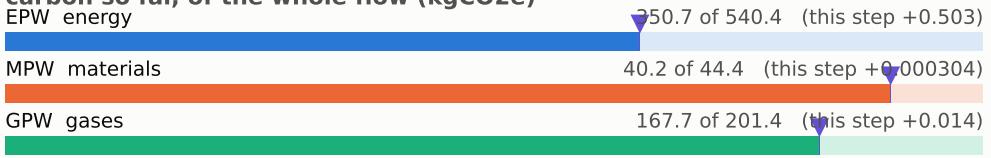


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

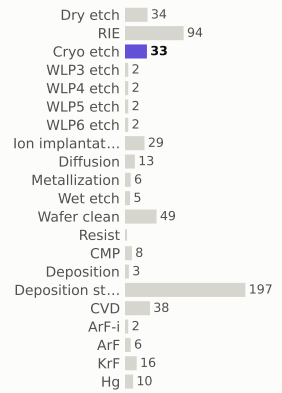

materials deposited (g)

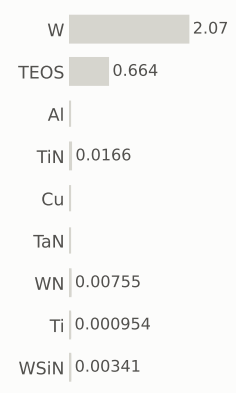

gases emitted (g)



Step #7281.6837: Cryo_etch


etch_noop · Cryo_etch

0.517	559.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



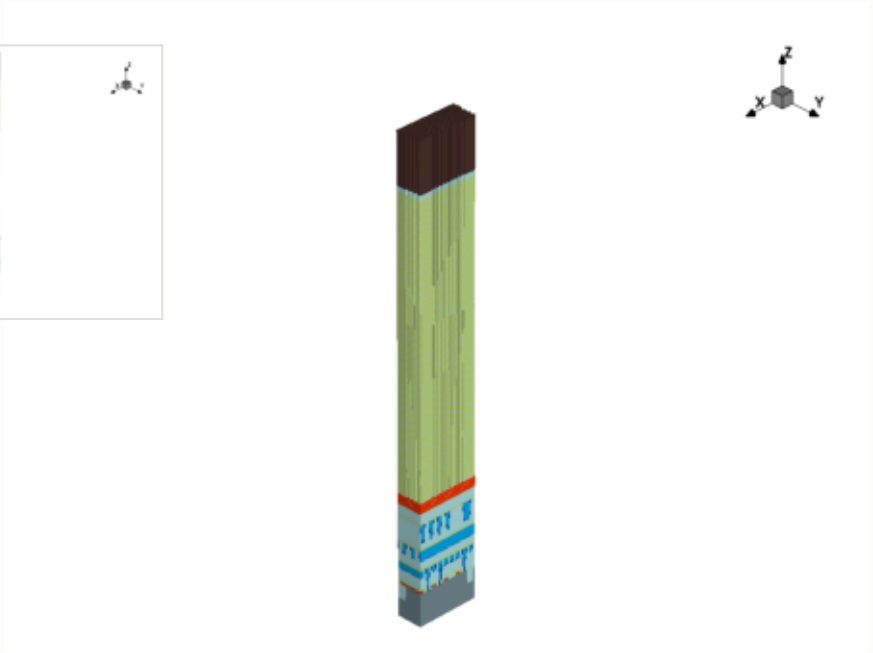


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

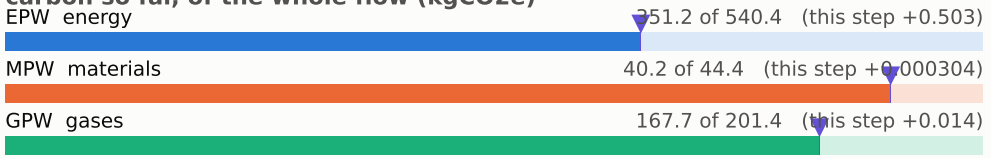


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

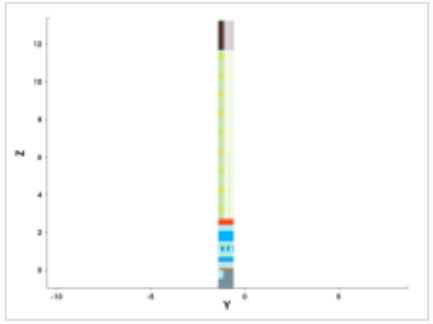


y cut at -1.035 µm

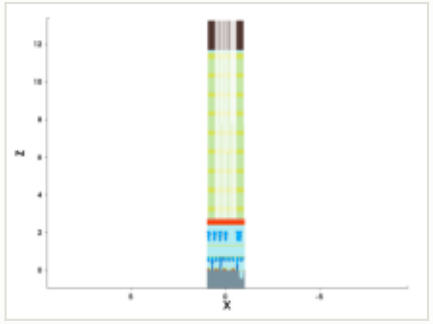


mask for this step

no mask for this step


steps by process area

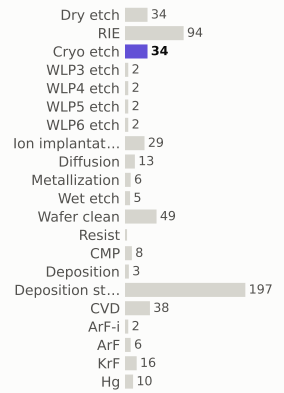

materials deposited (g)

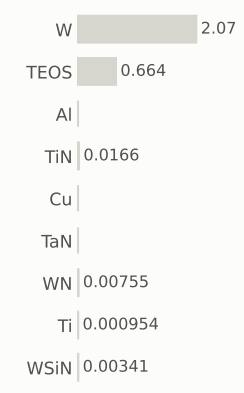

gases emitted (g)



Step #7281.7347: Cryo_etch


etch_noop · Cryo_etch

0.517	559.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




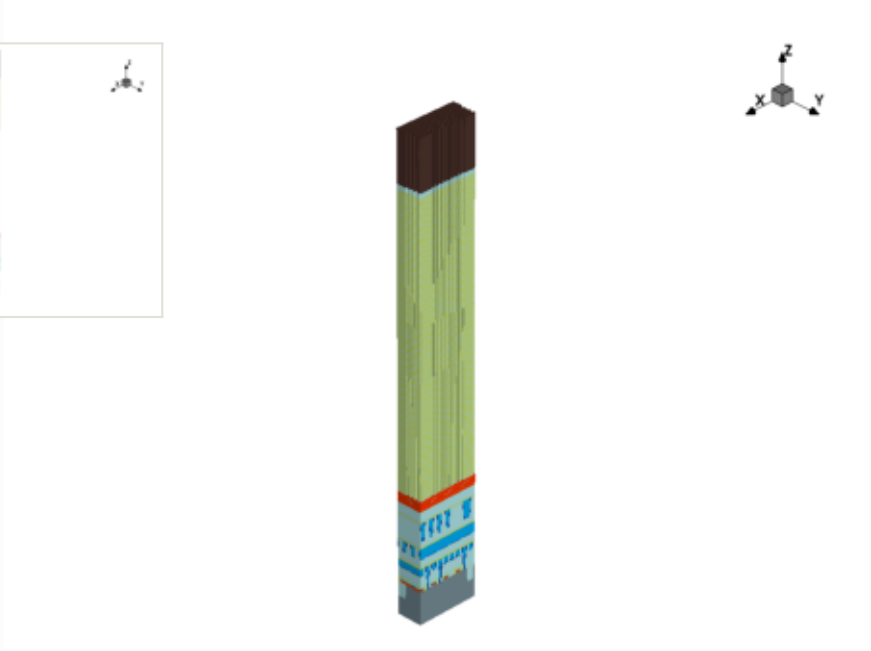

x cut at 0.000 µm

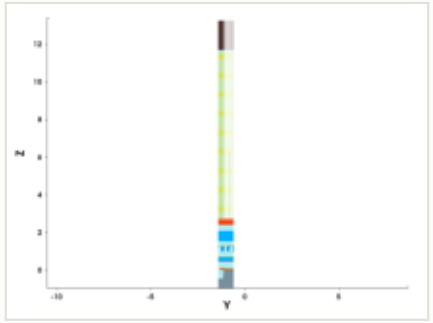

y cut at -1.035 µm

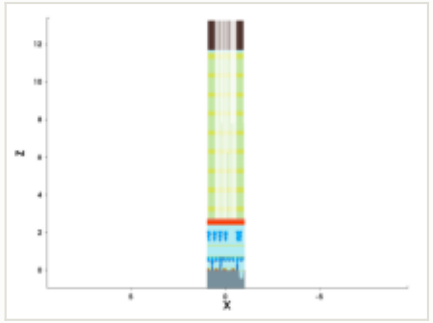

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

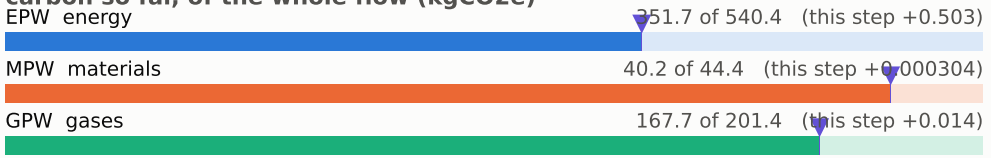


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

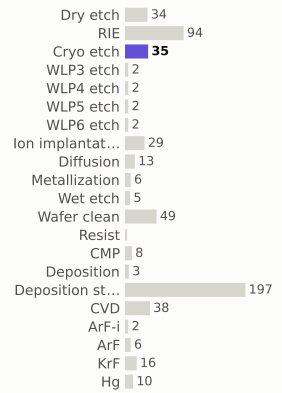

materials deposited (g)

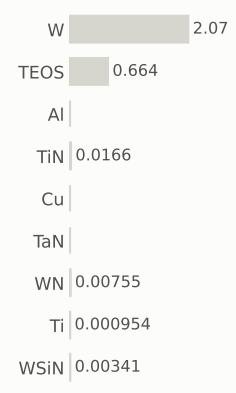

gases emitted (g)



Step #7281.7857: Cryo_etch


etch_noop · Cryo_etch

0.517	560.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




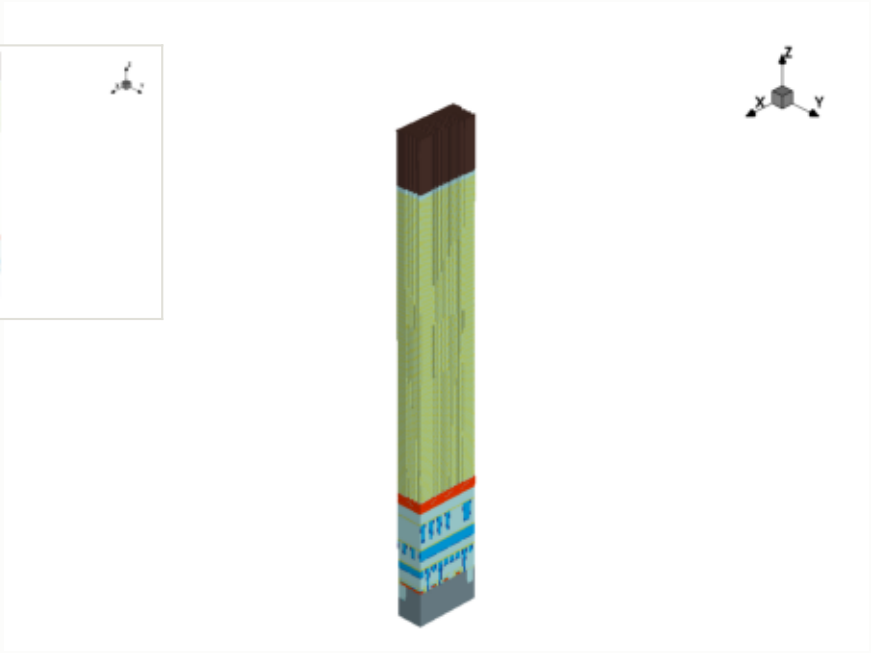

x cut at 0.000 µm

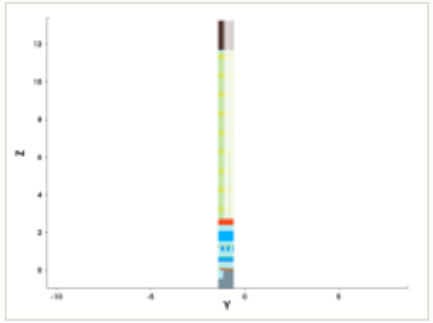

y cut at -1.035 µm

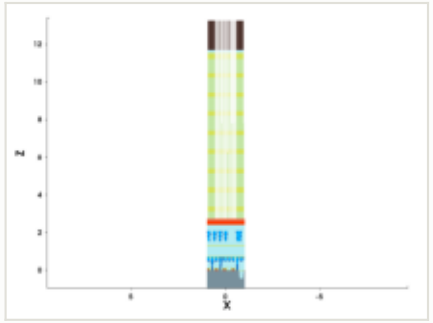

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

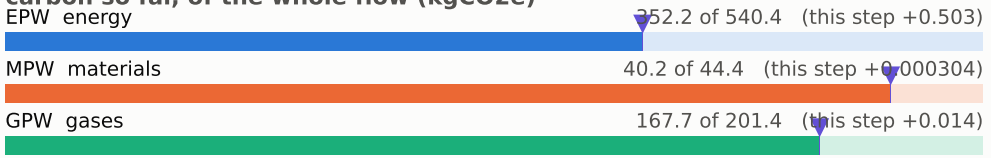


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

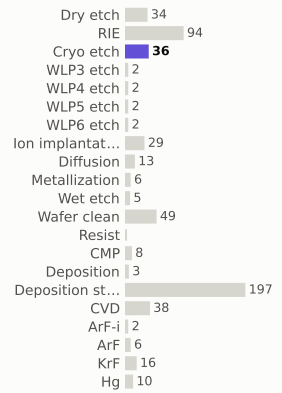

materials deposited (g)

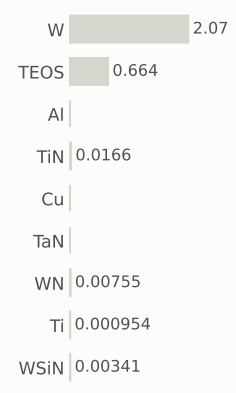

gases emitted (g)



Step #7281.8367: Cryo_etch


etch_noop · Cryo_etch

0.517	560.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




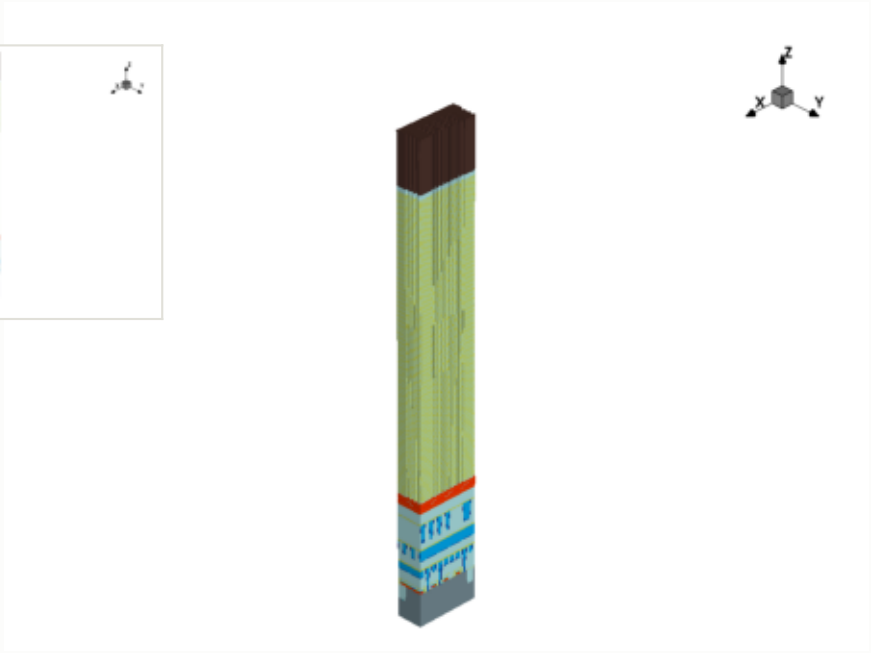

x cut at 0.000 µm

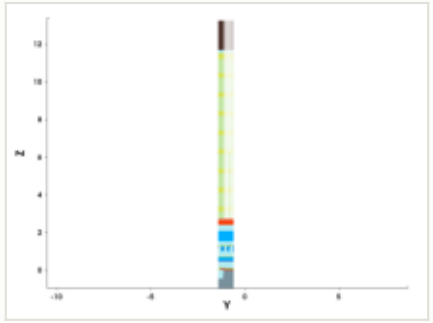

y cut at -1.035 µm

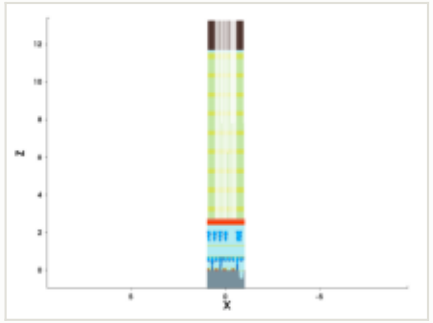

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

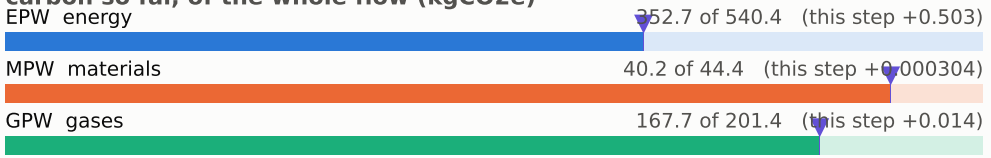


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

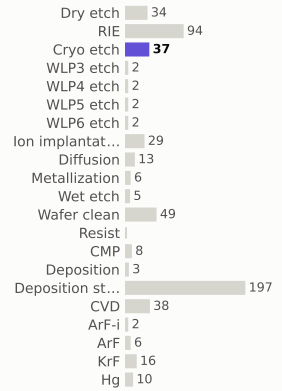

materials deposited (g)

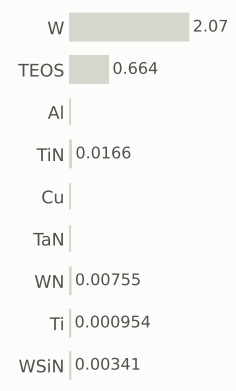

gases emitted (g)



Step #7281.8878: Cryo_etch


etch_noop · Cryo_etch

0.517	561.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




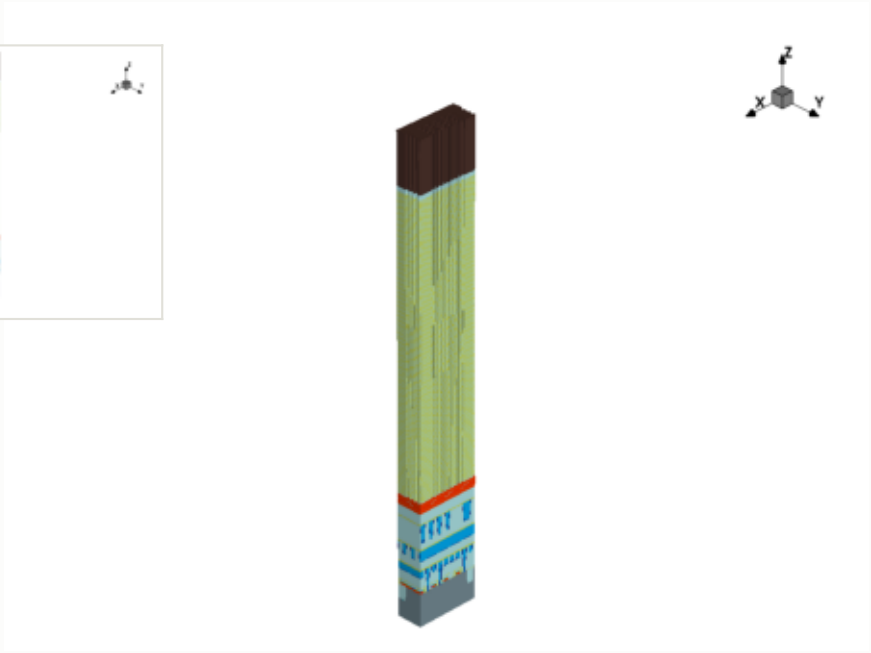

x cut at 0.000 µm

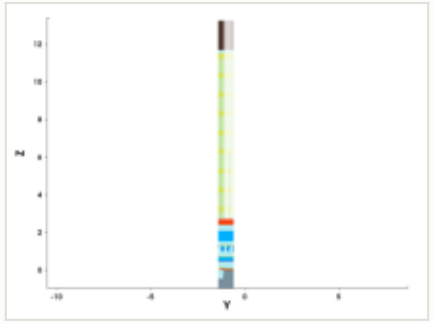

y cut at -1.035 µm

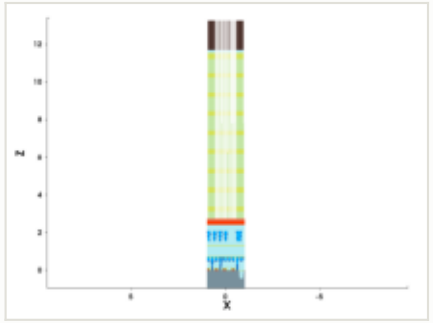

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

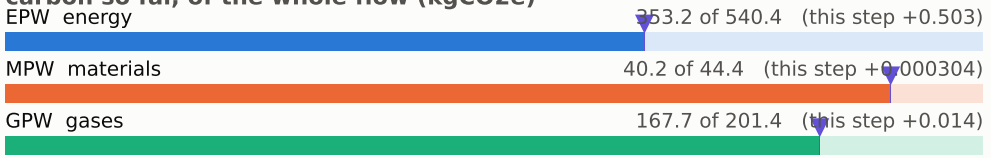


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

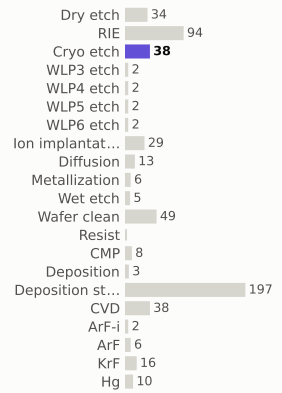

materials deposited (g)

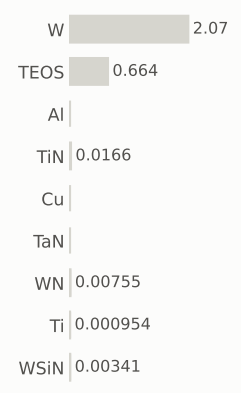

gases emitted (g)



Step #7281.9388: Cryo_etch


etch_noop · Cryo_etch

0.517	561.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




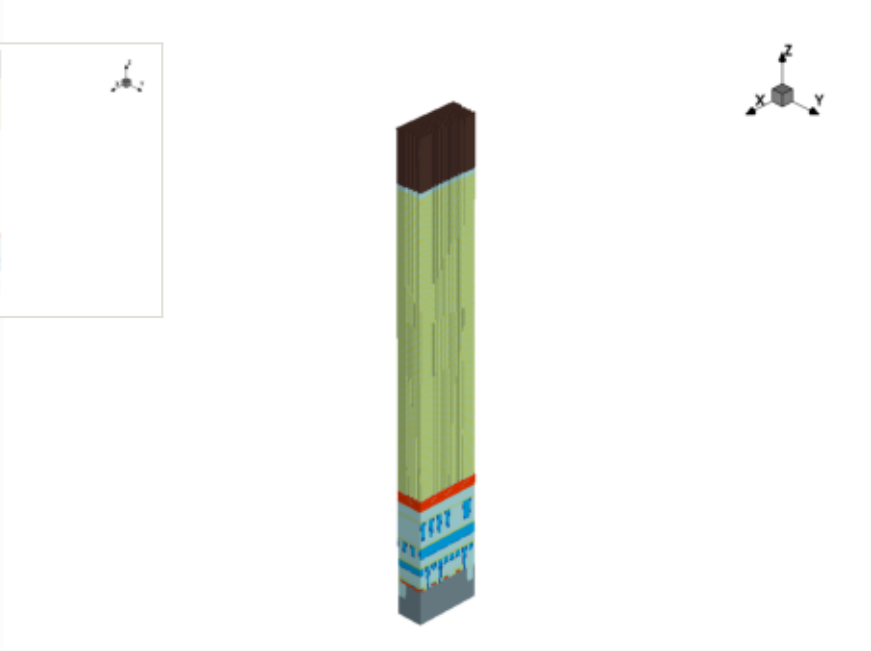

x cut at 0.000 µm

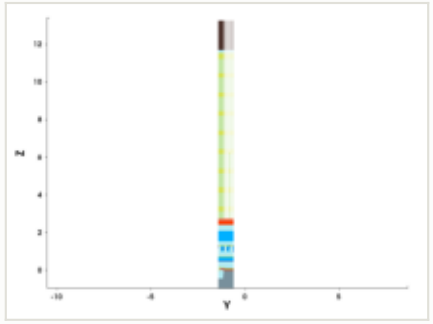

y cut at -1.035 µm

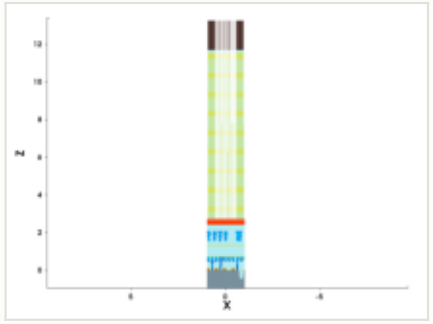

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

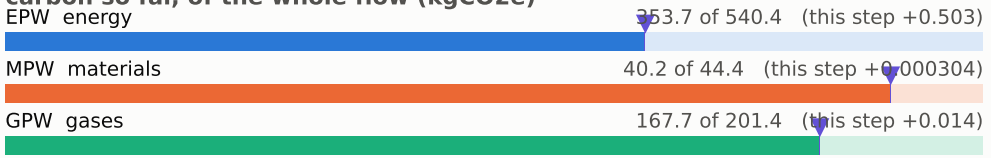


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

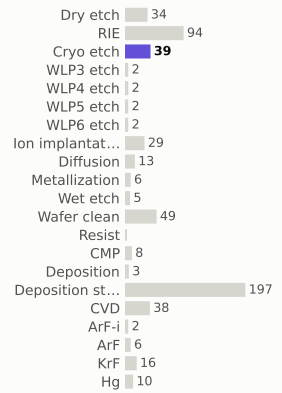

materials deposited (g)

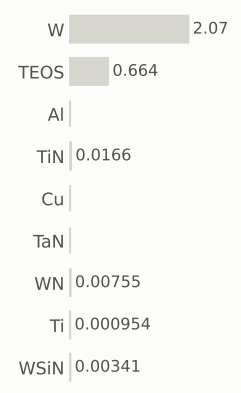

gases emitted (g)



Step #7281.9898: Cryo_etch


etch_noop · Cryo_etch

0.517	562.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




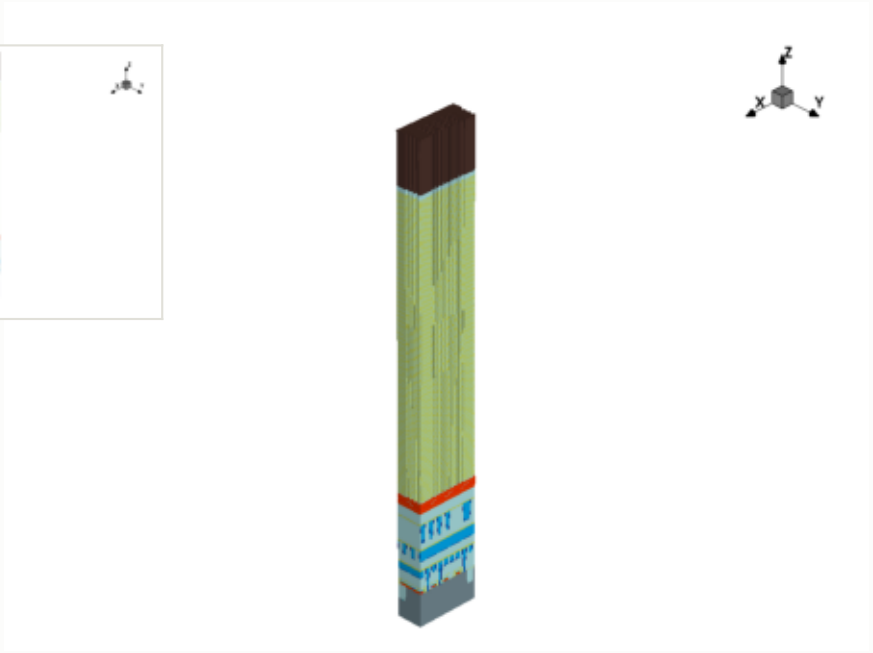

x cut at 0.000 µm

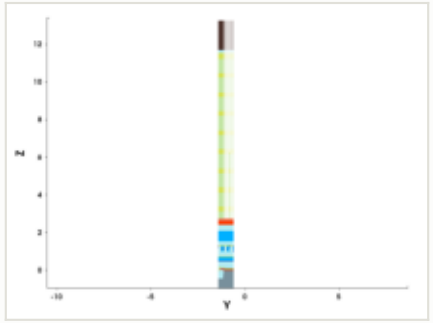

y cut at -1.035 µm

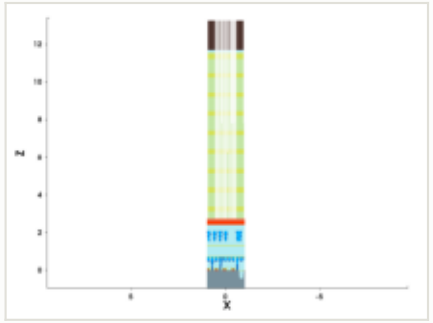

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

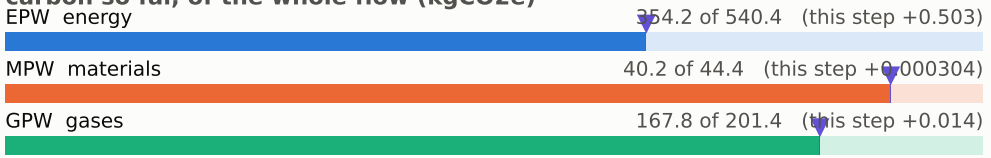


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

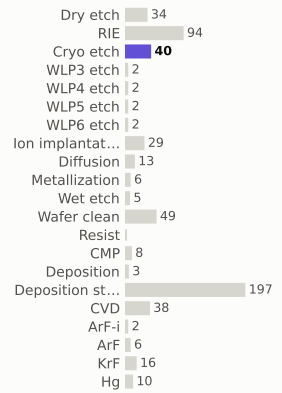

materials deposited (g)

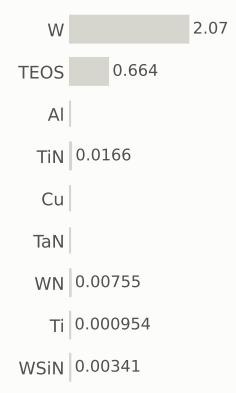

gases emitted (g)



Step #7282.0408: Cryo_etch


etch_noop · Cryo_etch

0.517	562.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



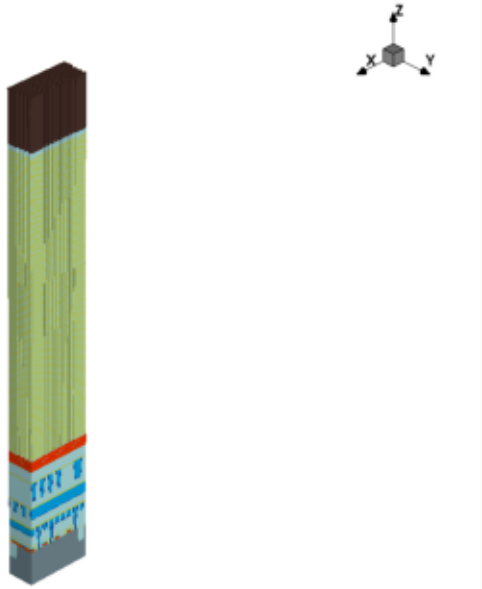


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

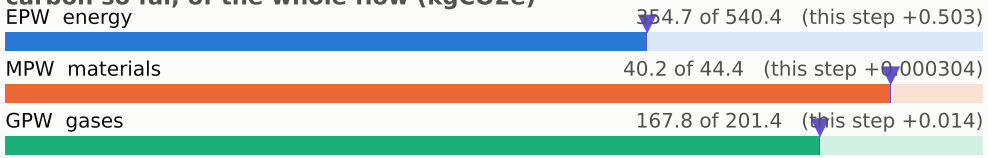


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

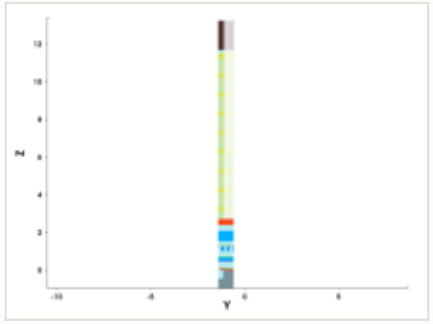


y cut at -1.035 µm

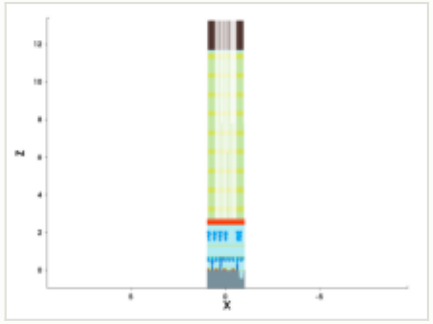


mask for this step

no mask for this step


steps by process area

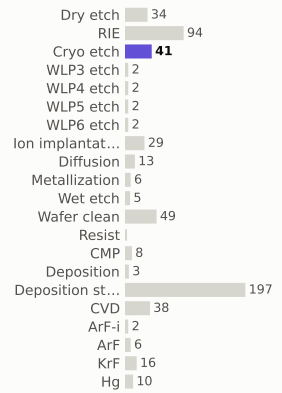

materials deposited (g)

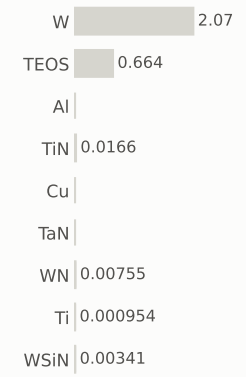

gases emitted (g)



Step #7282.0918: Cryo_etch


etch_noop · Cryo_etch

0.517	563.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




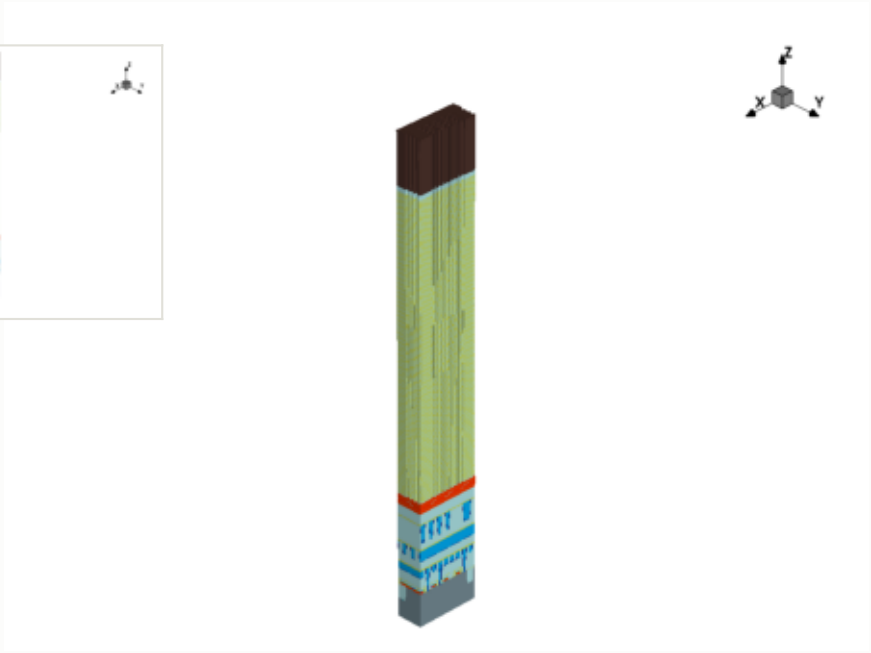

x cut at 0.000 µm

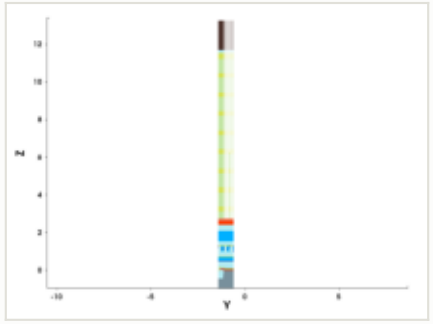

y cut at -1.035 µm

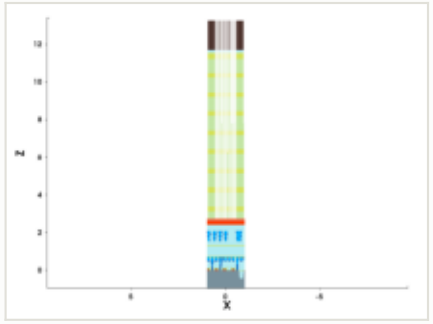

mask for this step


no mask for this step

this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

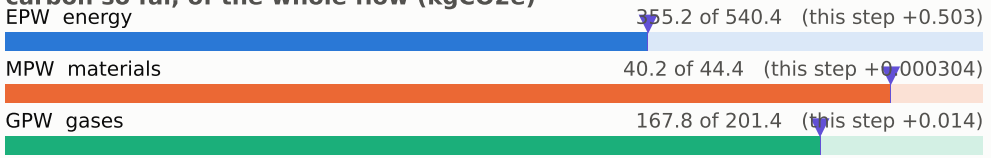


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

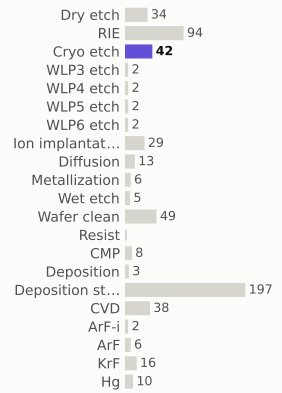

materials deposited (g)

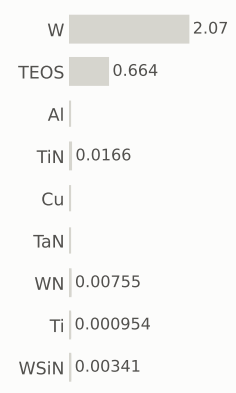

gases emitted (g)



Step #7282.1429: Cryo_etch


etch_noop · Cryo_etch

0.517	563.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




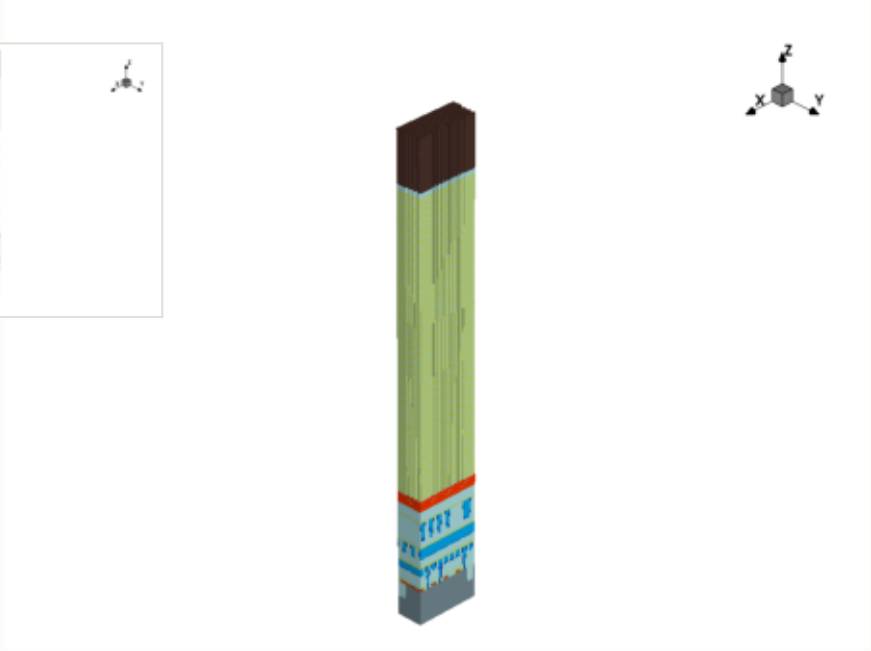

x cut at 0.000 µm

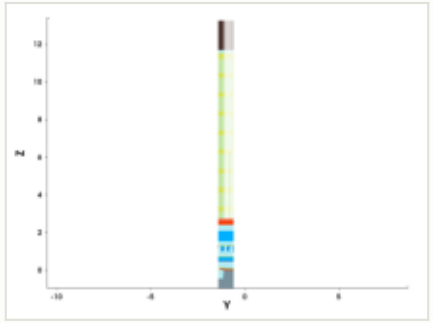

y cut at -1.035 µm

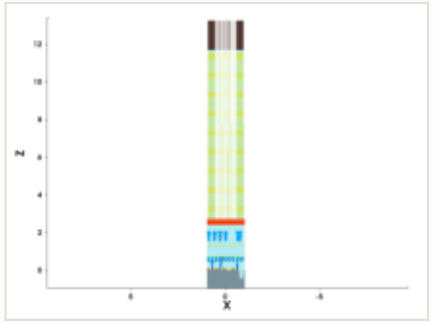

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

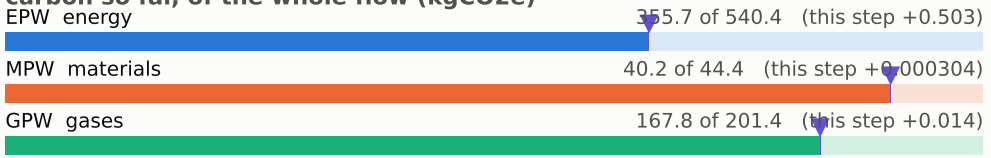


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

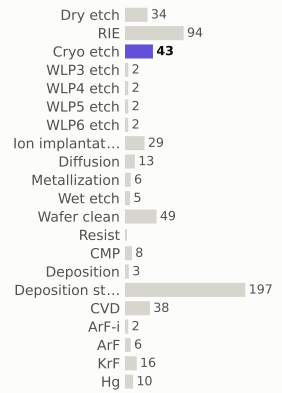

materials deposited (g)

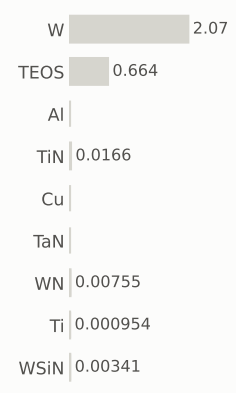

gases emitted (g)



Step #7282.1939: Cryo_etch


etch_noop · Cryo_etch

0.517	564.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




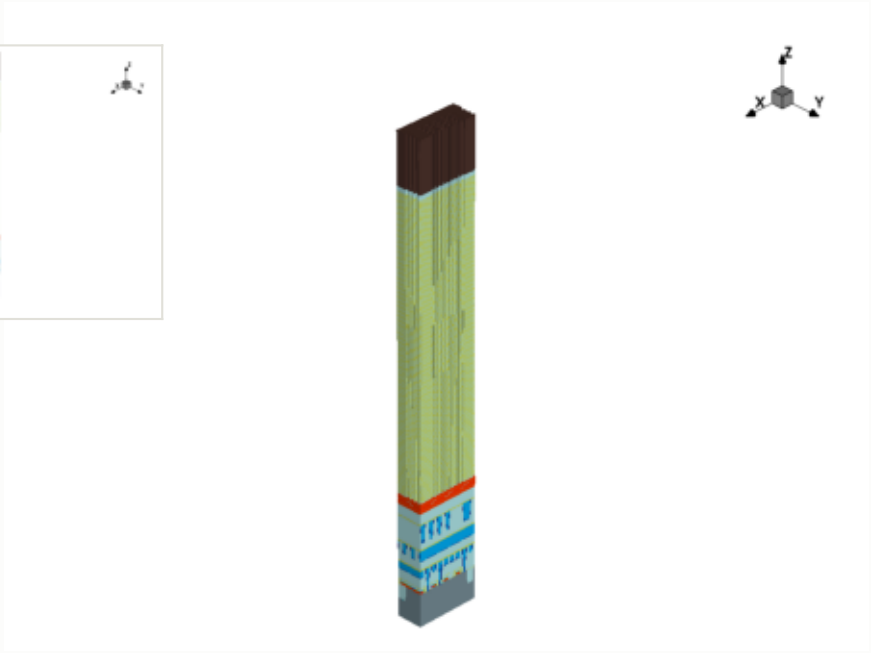

x cut at 0.000 µm

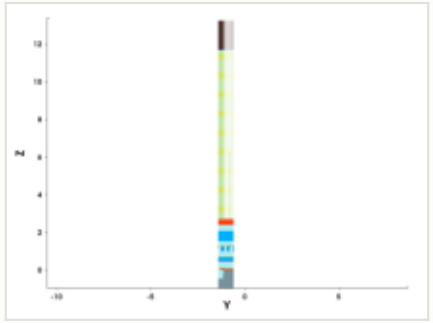

y cut at -1.035 µm

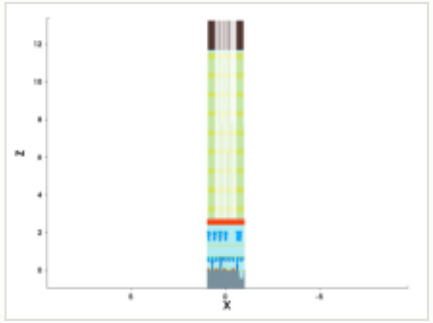

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

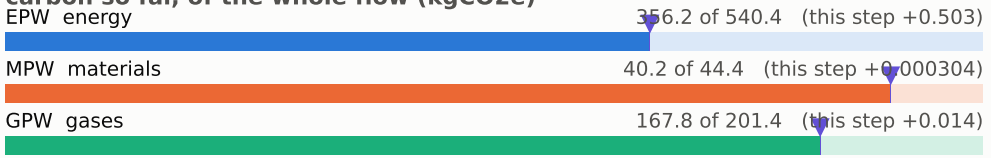


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

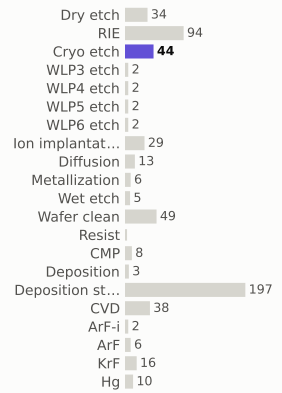

materials deposited (g)

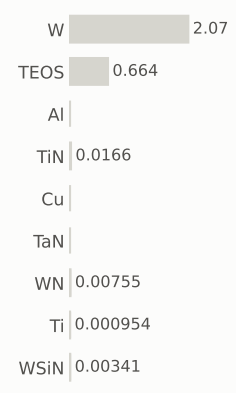

gases emitted (g)



Step #7282.2449: Cryo_etch


etch_noop · Cryo_etch

0.517	564.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




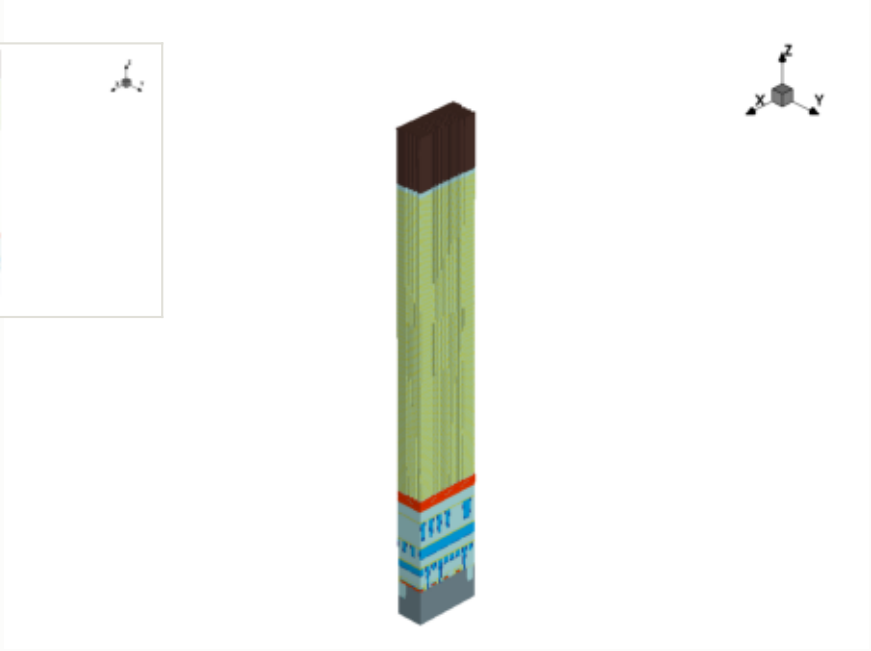

x cut at 0.000 µm

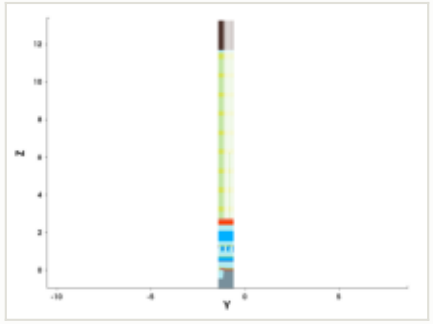

y cut at -1.035 µm

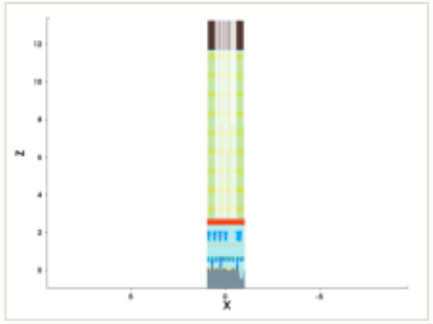

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

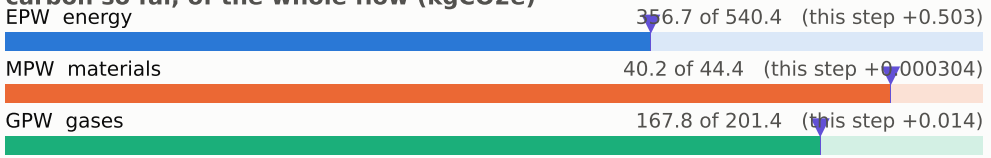


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

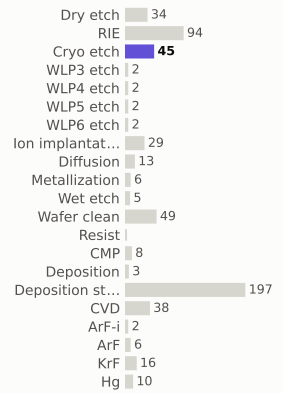

materials deposited (g)

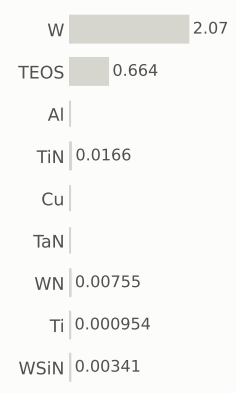

gases emitted (g)



Step #7282.2959: Cryo_etch


etch_noop · Cryo_etch

0.517	565.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




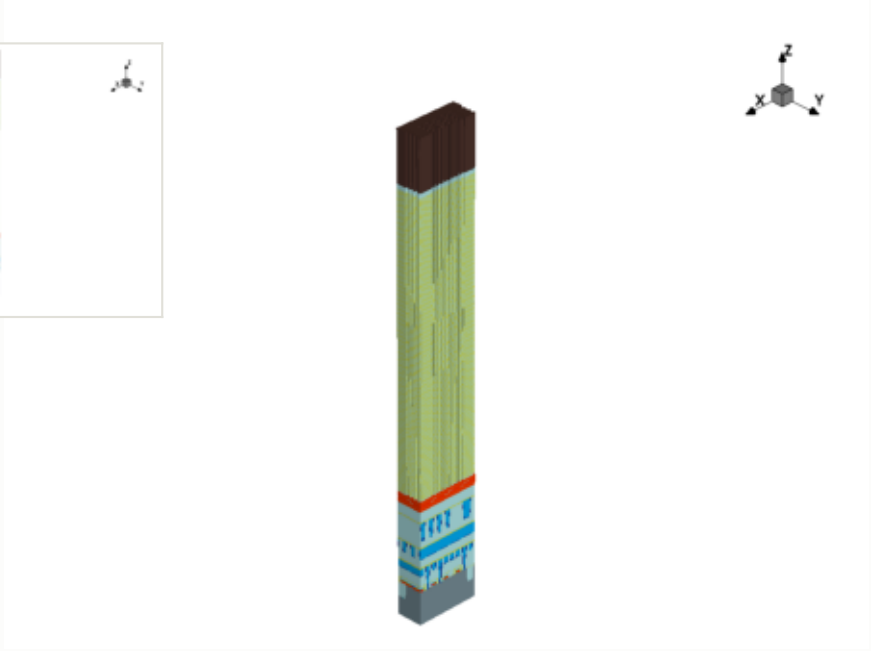

x cut at 0.000 µm

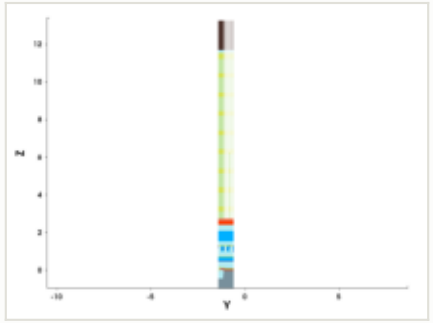

y cut at -1.035 µm

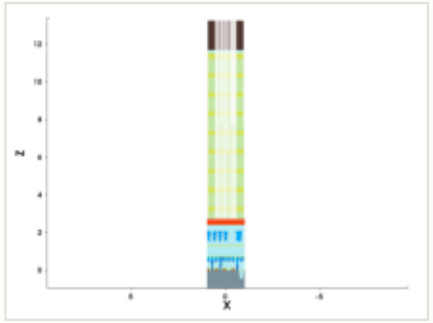

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

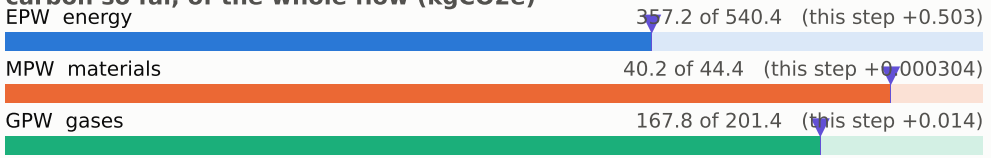


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

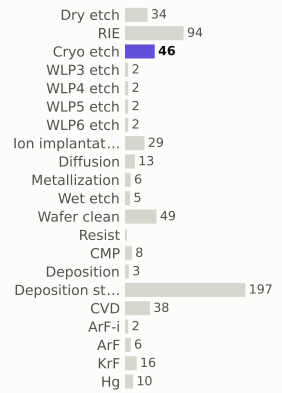

materials deposited (g)

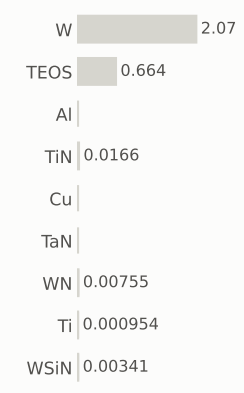

gases emitted (g)



Step #7282.3469: Cryo_etch


etch_noop · Cryo_etch

0.517	565.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




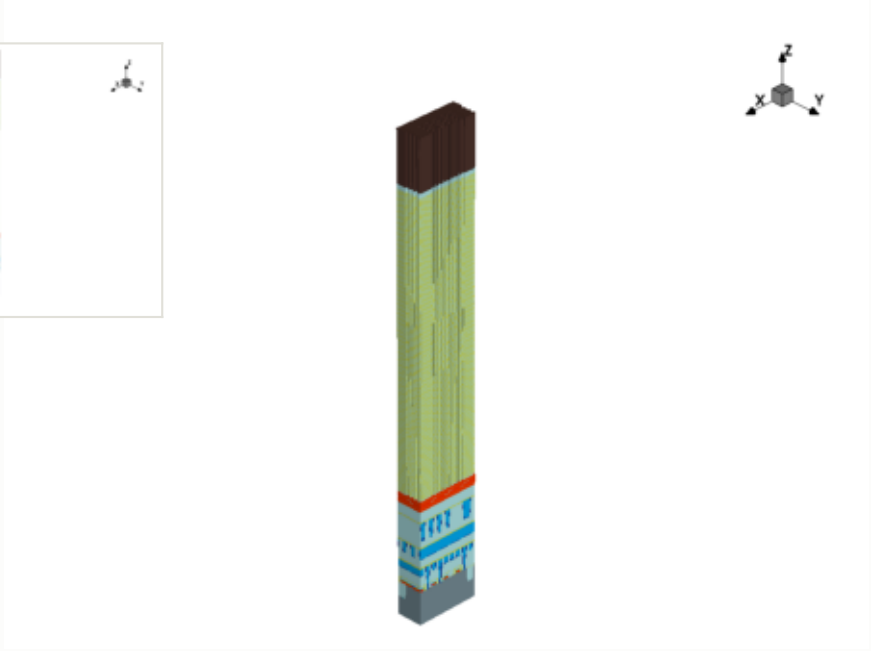

x cut at 0.000 µm

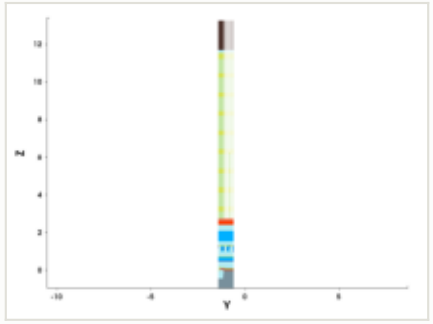

y cut at -1.035 µm

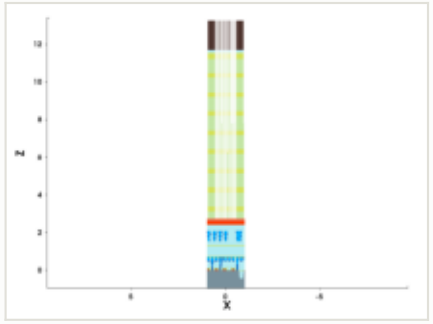

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

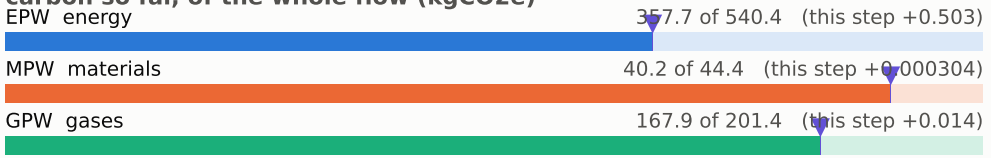


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

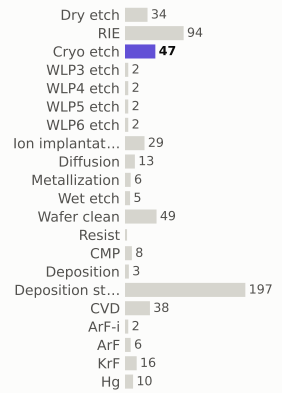

materials deposited (g)

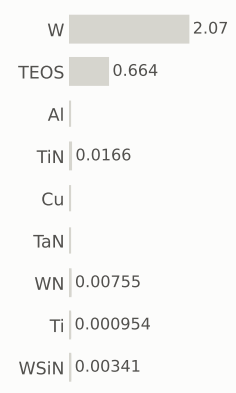

gases emitted (g)



Step #7282.398: Cryo_etch


etch_noop · Cryo_etch

0.517	566.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




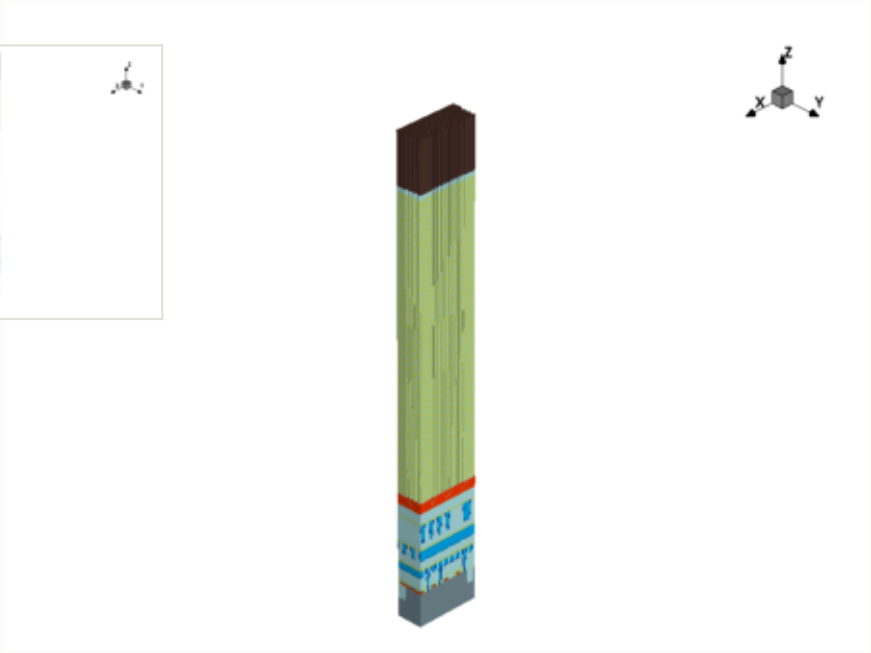

x cut at 0.000 µm

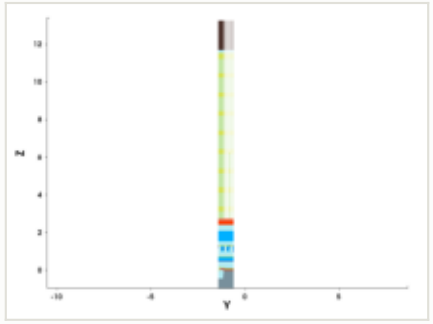

y cut at -1.035 µm

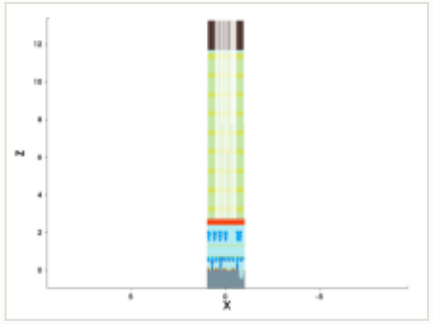

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

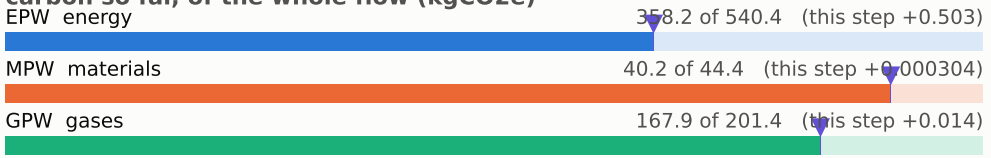


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

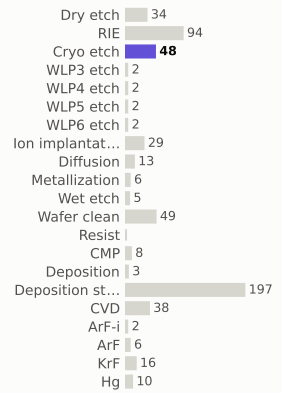

materials deposited (g)

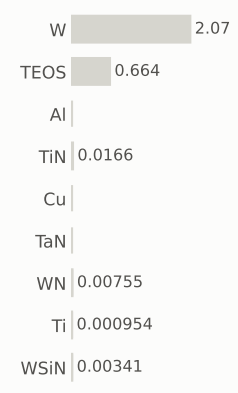

gases emitted (g)



Step #7282.449: Cryo_etch


etch_noop · Cryo_etch

0.517	566.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




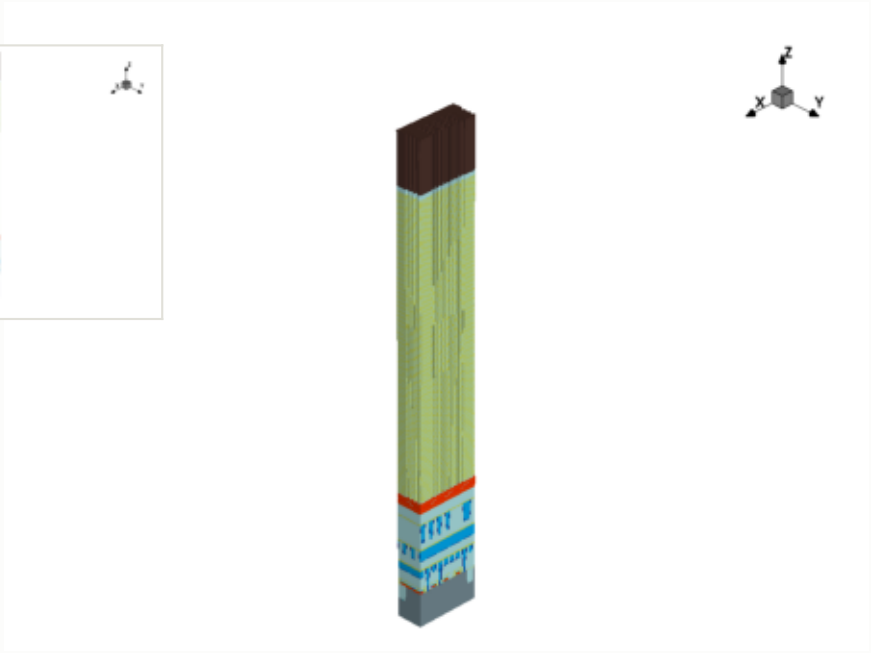

x cut at 0.000 µm

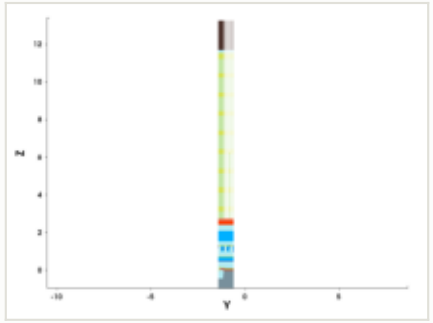

y cut at -1.035 µm

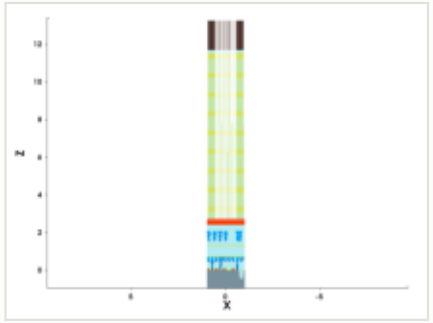

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

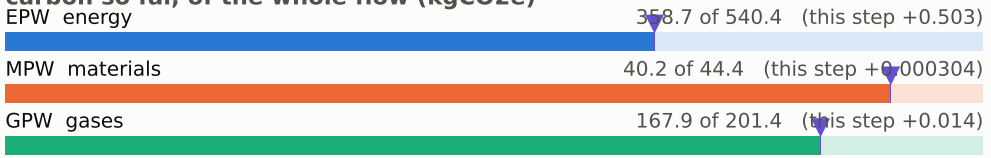


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

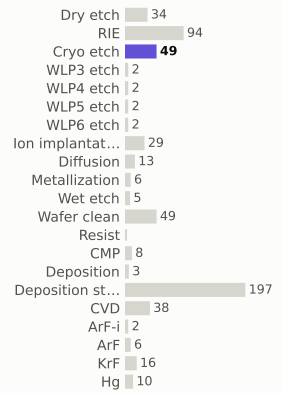

materials deposited (g)

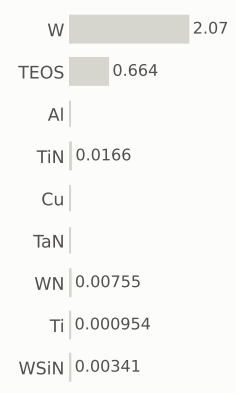

gases emitted (g)



Step #7282.5: Cryo_etch


etch_noop · Cryo_etch

0.517	567.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




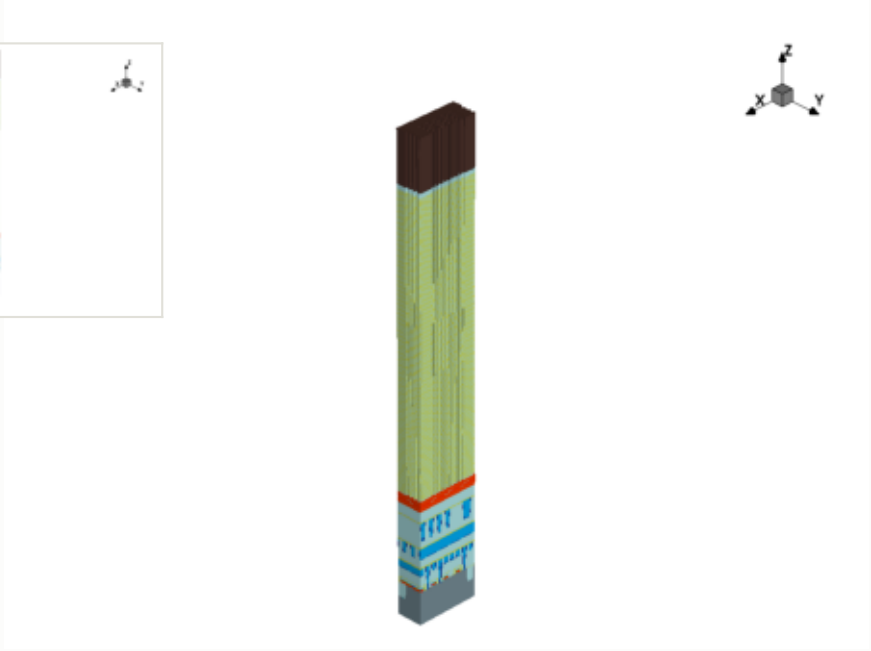

x cut at 0.000 µm

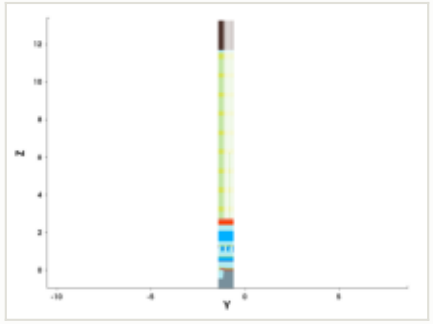

y cut at -1.035 µm

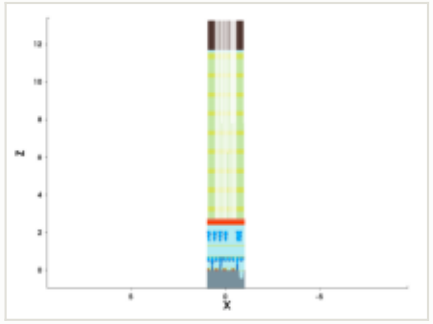

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

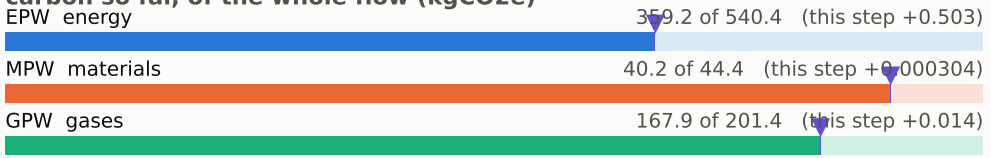


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

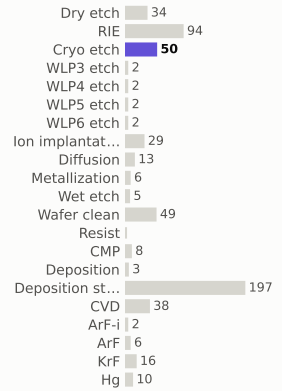

materials deposited (g)

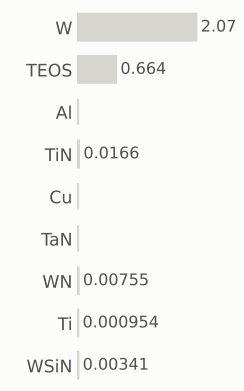

gases emitted (g)



Step #7282.551: Cryo_etch


etch_noop · Cryo_etch

0.517	567.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




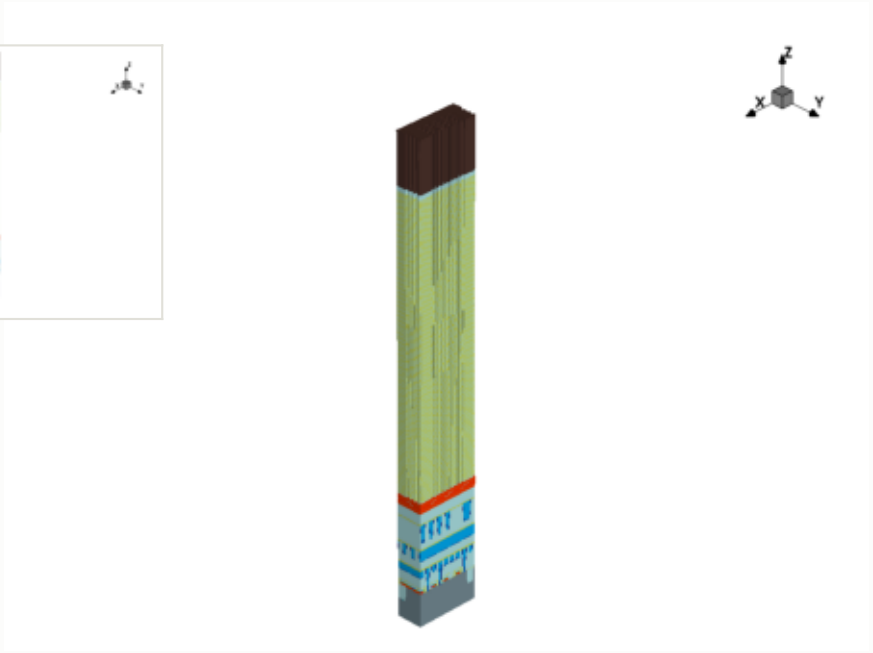

x cut at 0.000 µm

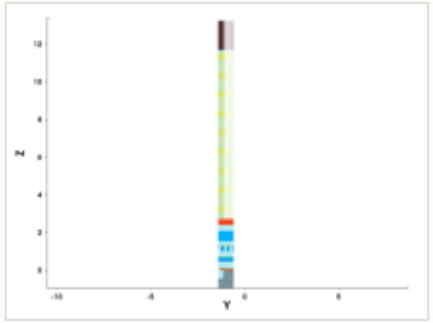

y cut at -1.035 µm

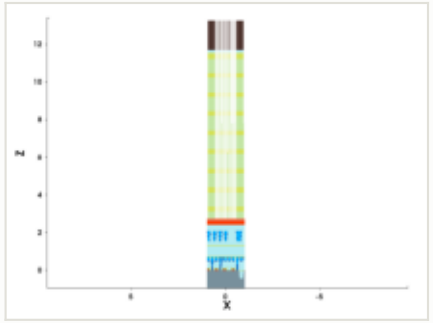

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

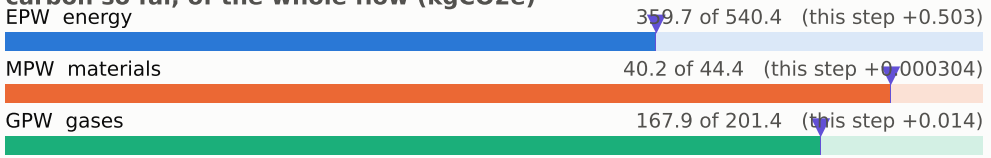


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

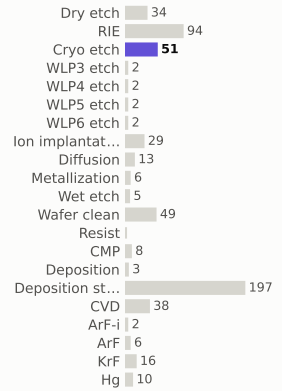

materials deposited (g)

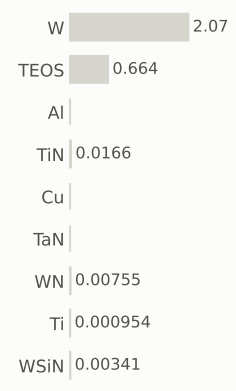

gases emitted (g)



Step #7282.602: Cryo_etch


etch_noop · Cryo_etch

0.517	568.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




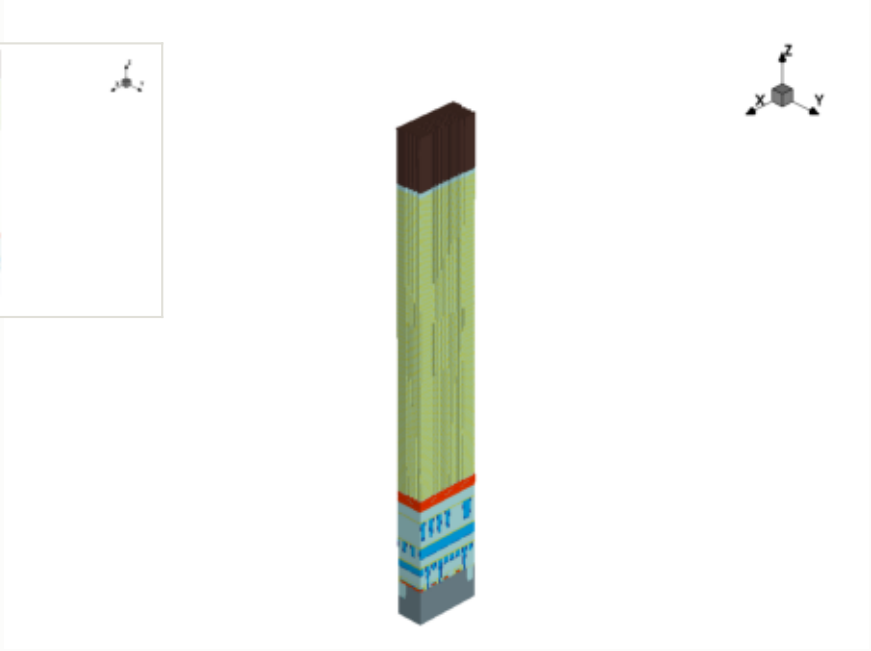

x cut at 0.000 µm

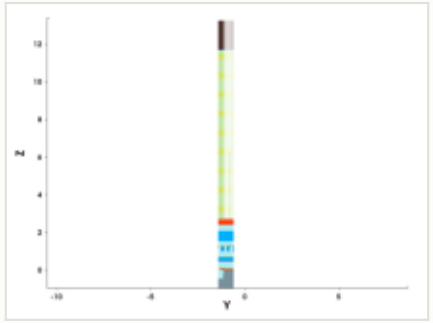

y cut at -1.035 µm

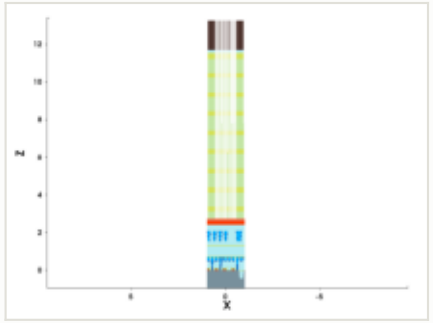

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

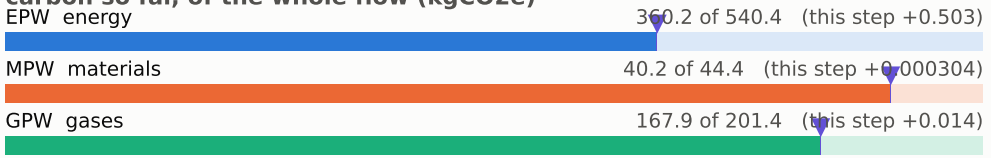


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

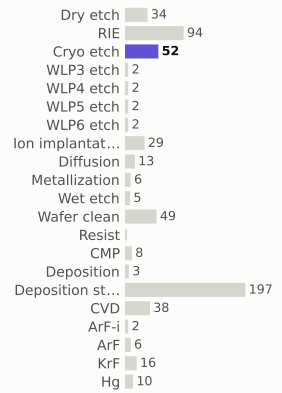

materials deposited (g)

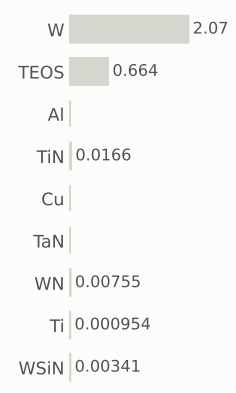

gases emitted (g)



Step #7282.6531: Cryo_etch


etch_noop · Cryo_etch

0.517	568.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




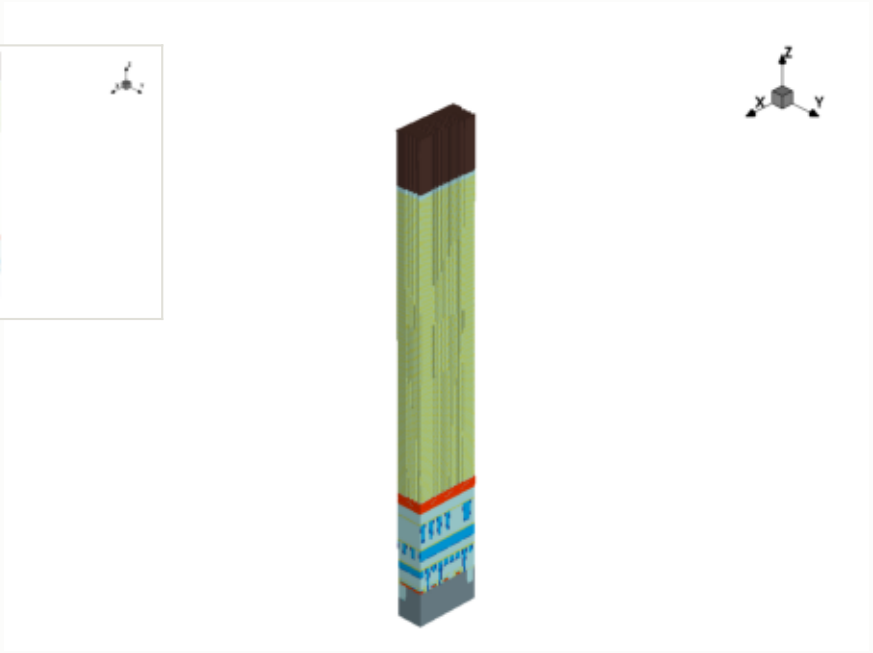

x cut at 0.000 µm

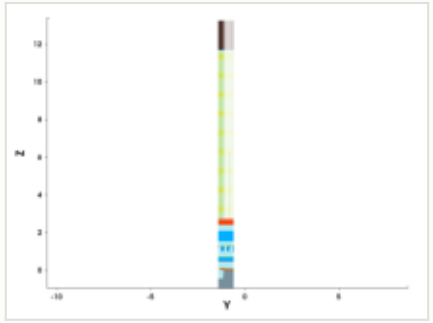

y cut at -1.035 µm

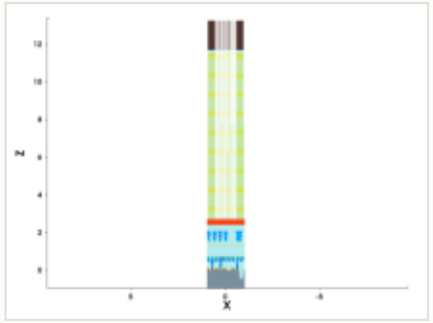

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

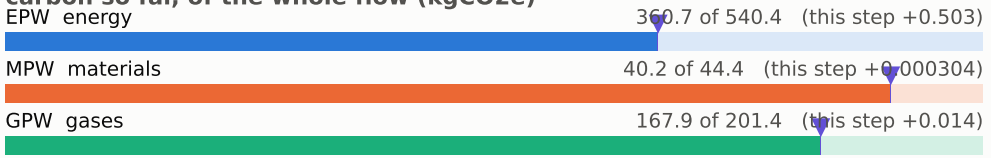


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

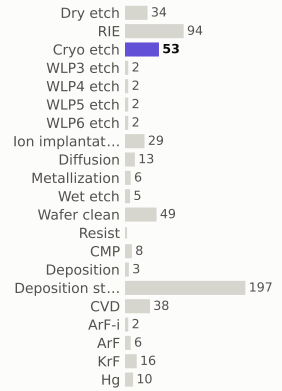

materials deposited (g)

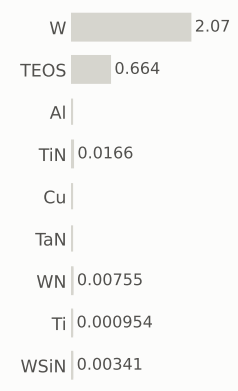

gases emitted (g)



Step #7282.7041: Cryo_etch


etch_noop · Cryo_etch

0.517	569.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




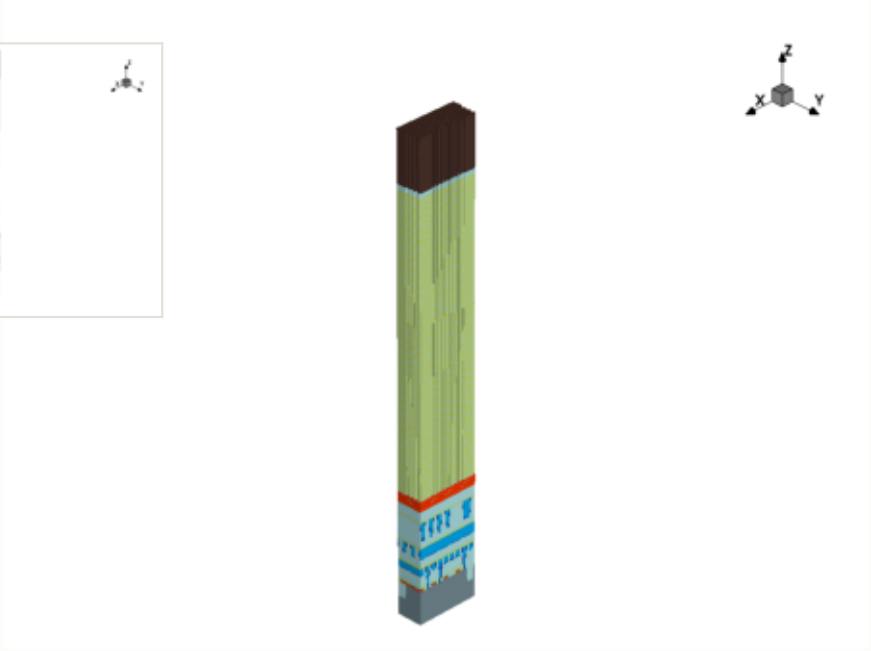

x cut at 0.000 µm

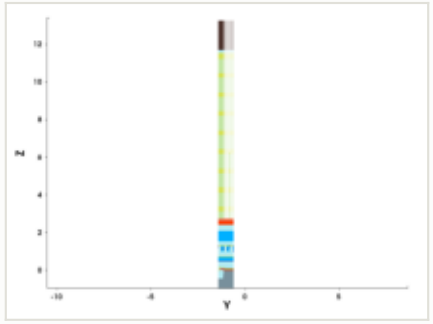

y cut at -1.035 µm

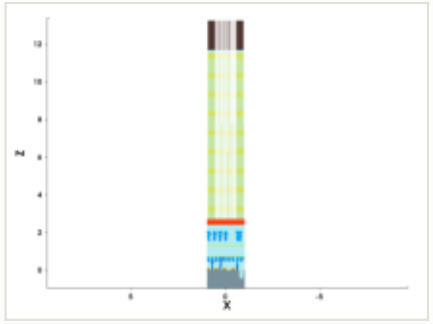

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

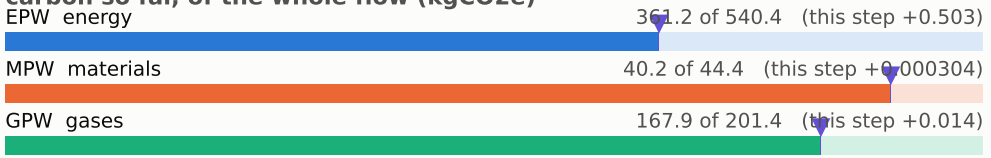


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

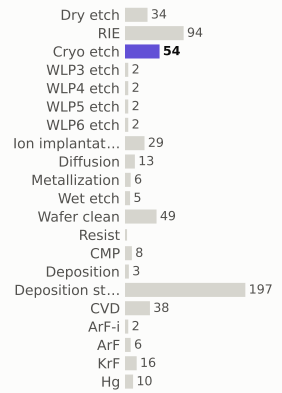

materials deposited (g)

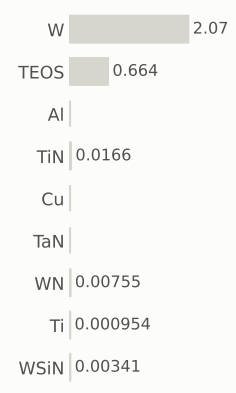

gases emitted (g)



Step #7282.7551: Cryo_etch


etch_noop · Cryo_etch

0.517	569.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




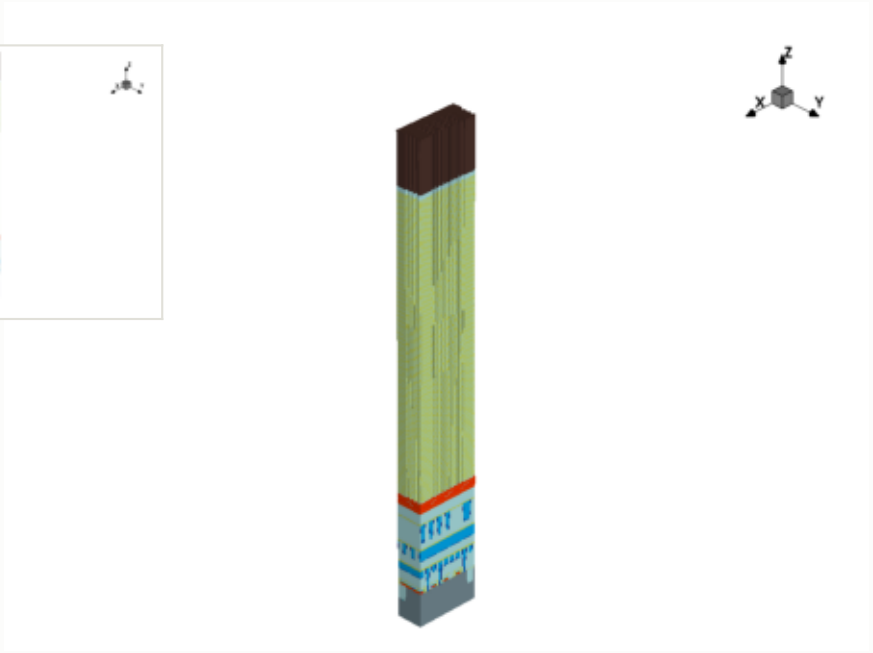

x cut at 0.000 µm

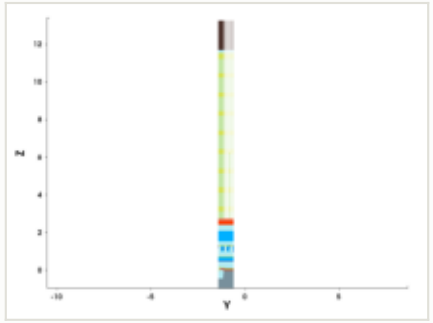

y cut at -1.035 µm

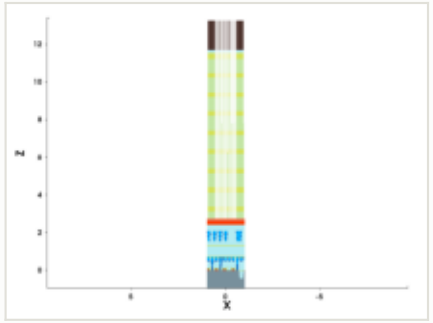

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

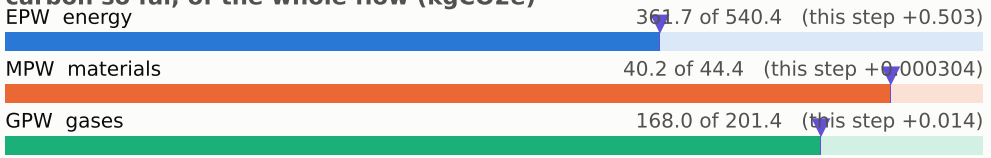


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

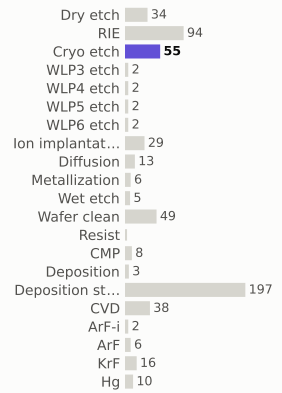

materials deposited (g)

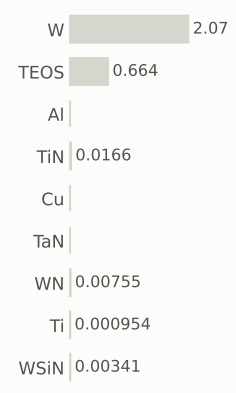

gases emitted (g)



Step #7282.8061: Cryo_etch


etch_noop · Cryo_etch

0.517	570.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




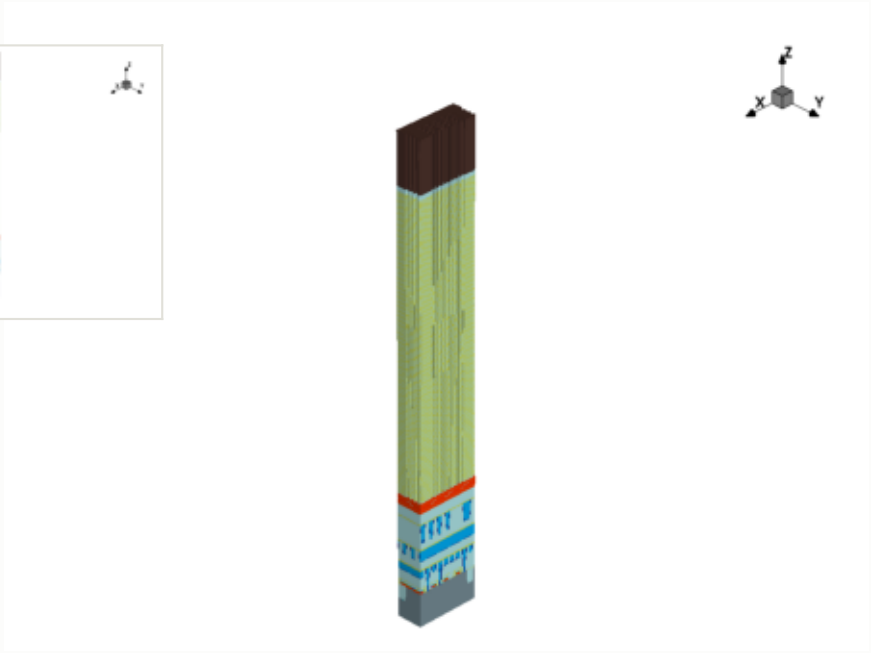

x cut at 0.000 µm

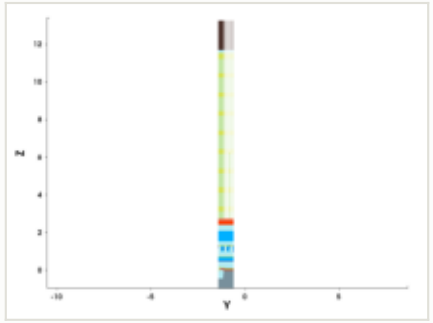

y cut at -1.035 µm

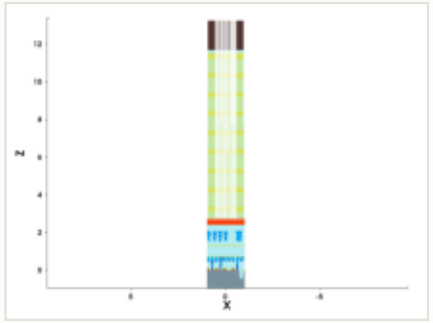

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

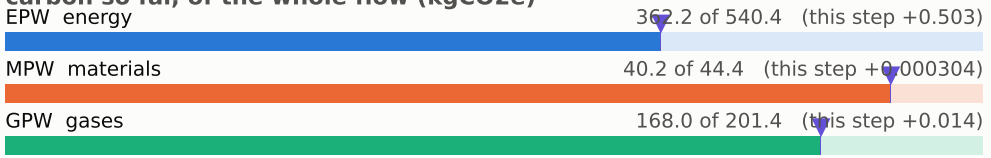


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

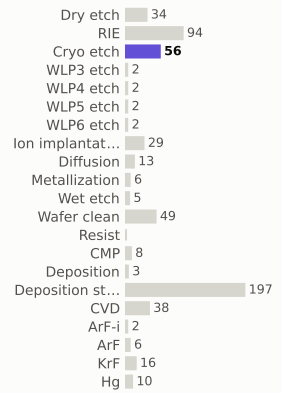

materials deposited (g)

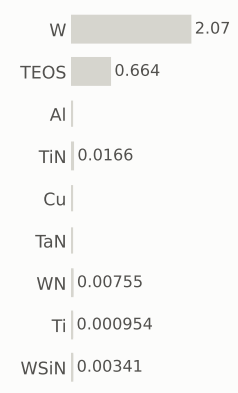

gases emitted (g)



Step #7282.8571: Cryo_etch


etch_noop · Cryo_etch

0.517	571.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




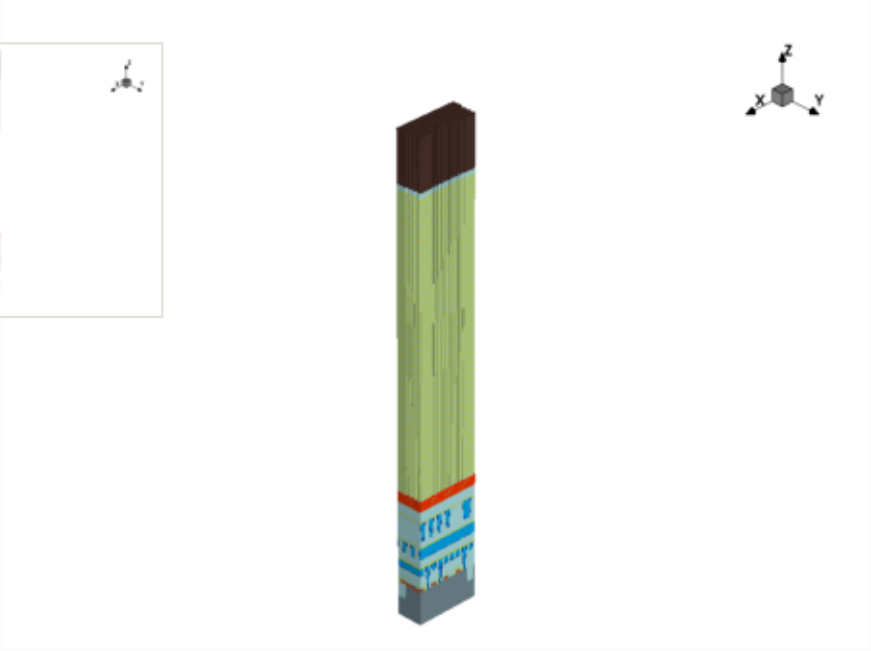

x cut at 0.000 µm

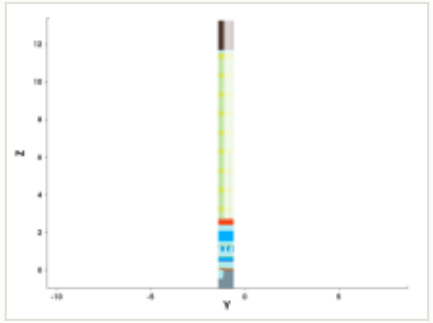

y cut at -1.035 µm

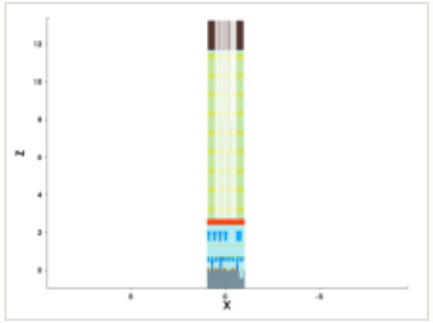

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

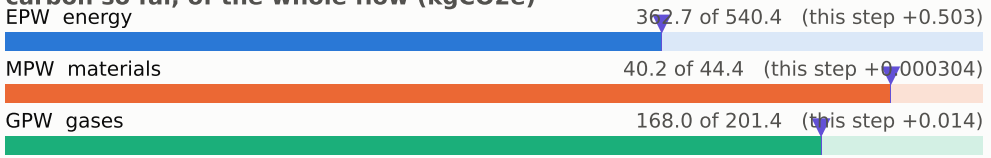


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

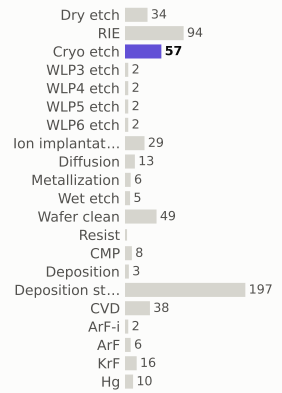

materials deposited (g)

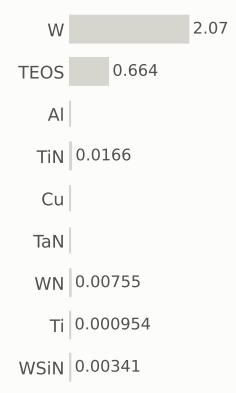

gases emitted (g)



Step #7282.9082: Cryo_etch


etch_noop · Cryo_etch

0.517	571.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




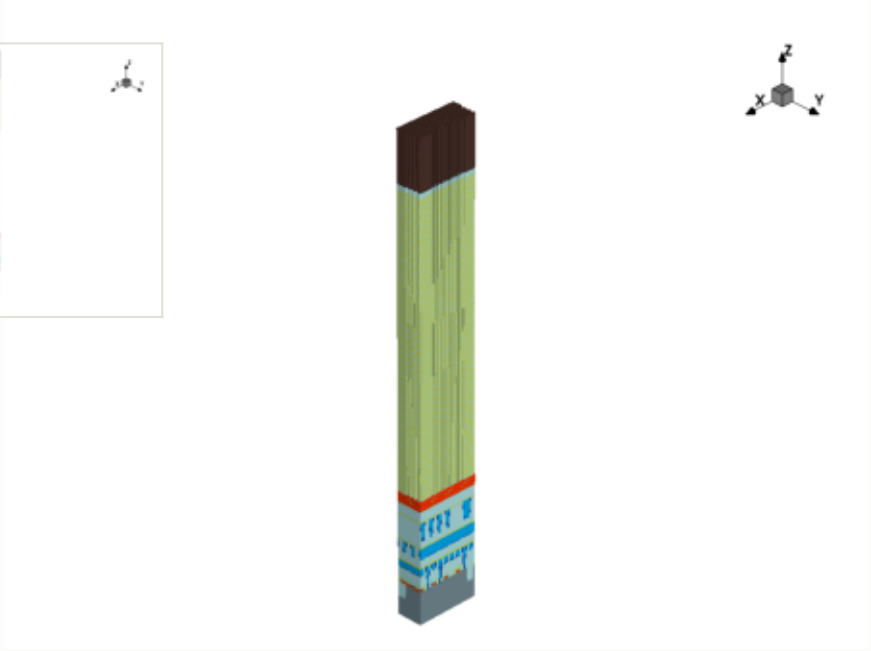

x cut at 0.000 µm

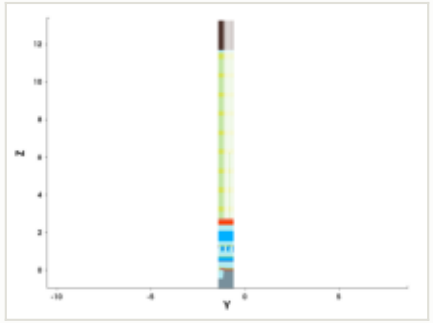

y cut at -1.035 µm

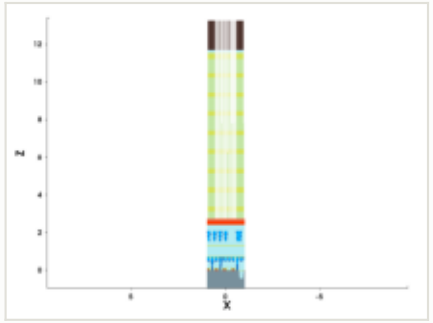

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

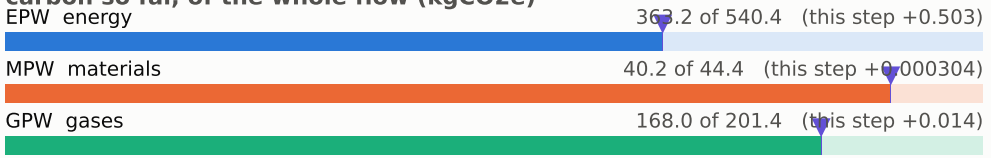


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

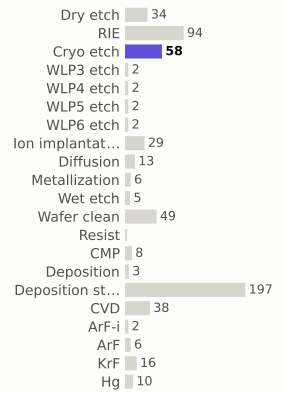

materials deposited (g)

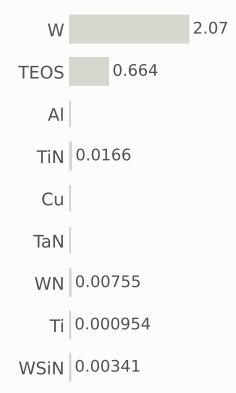

gases emitted (g)



Step #7282.9592: Cryo_etch


etch_noop · Cryo_etch

0.517	572.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




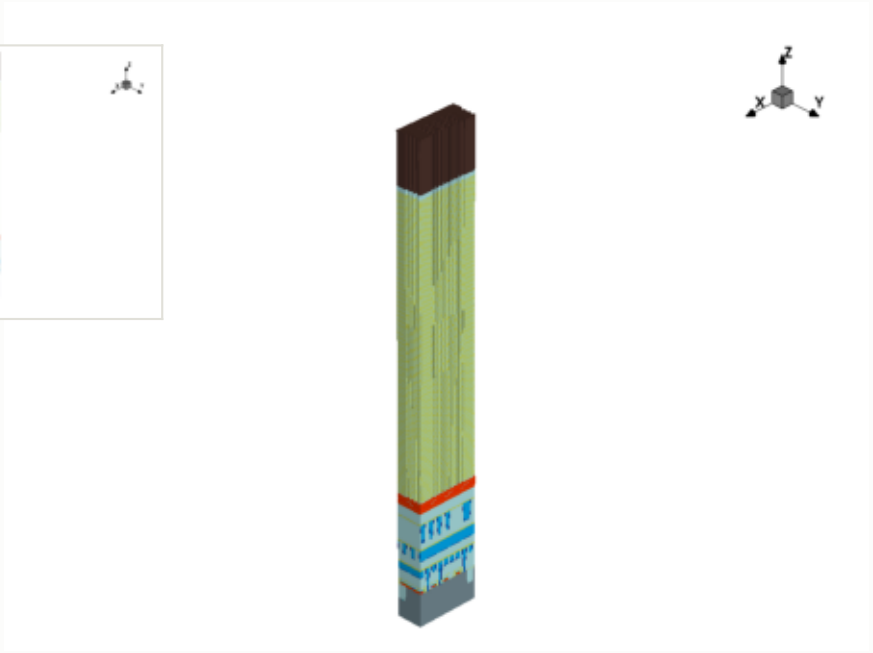

x cut at 0.000 µm

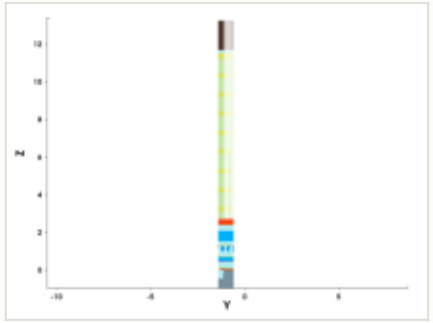

y cut at -1.035 µm

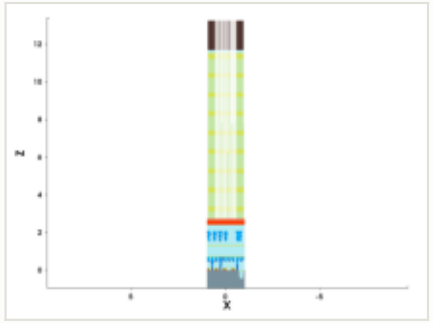

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

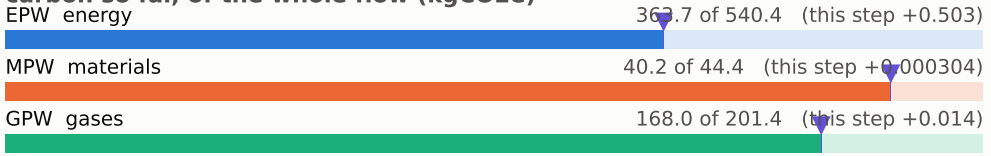


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

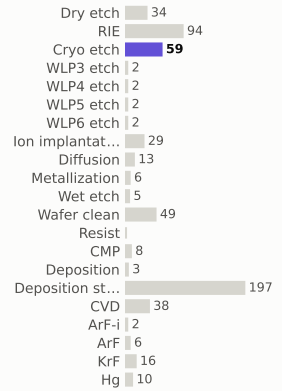

materials deposited (g)

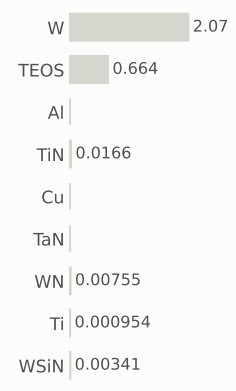

gases emitted (g)



Step #7283.0102: Cryo_etch


etch_noop · Cryo_etch

0.517	572.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




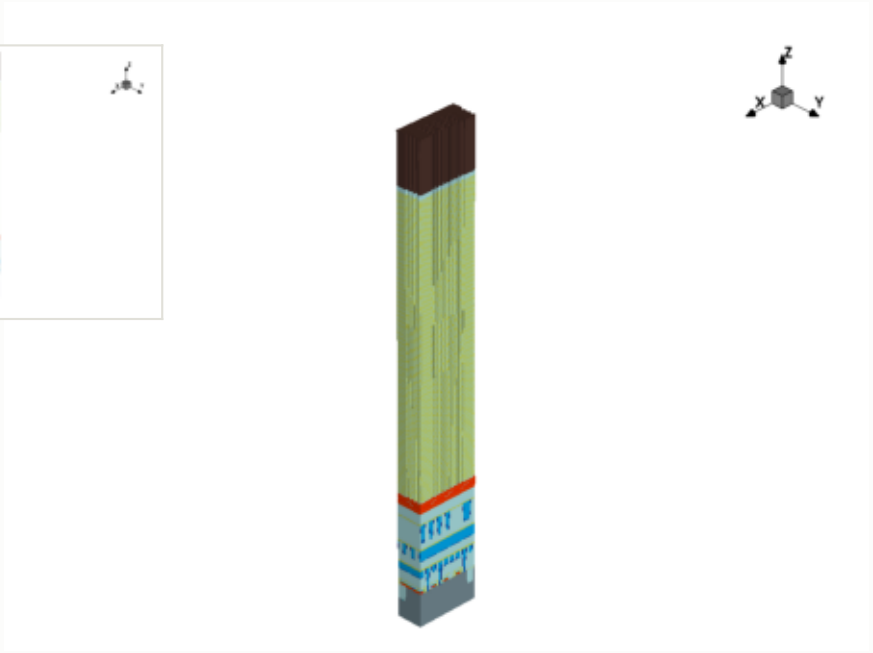

x cut at 0.000 µm

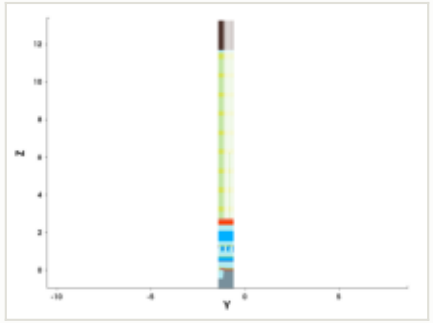

y cut at -1.035 µm

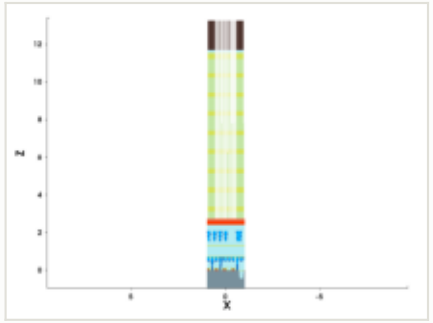

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

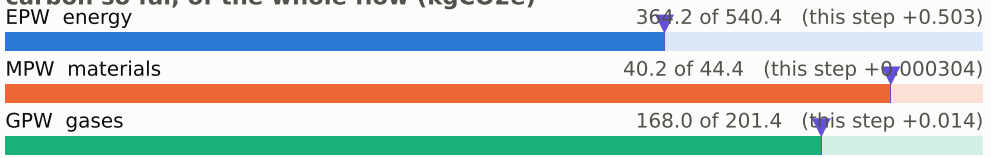


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

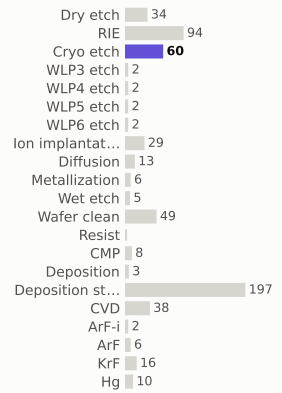

materials deposited (g)

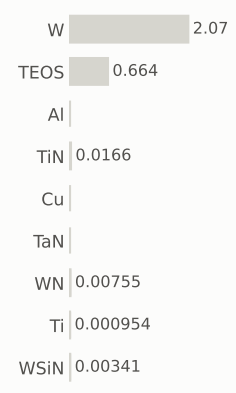

gases emitted (g)



Step #7283.0612: Cryo_etch

etch_noop · Cryo_etch

0.517	573.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

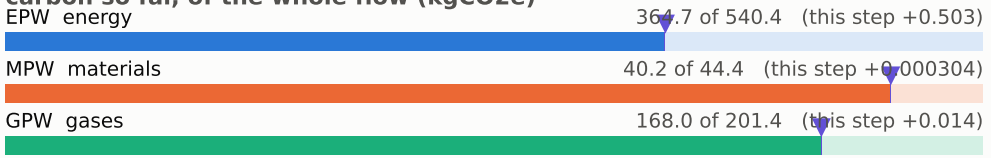


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

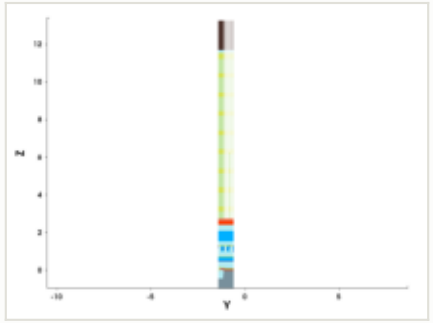


y cut at -1.035 µm

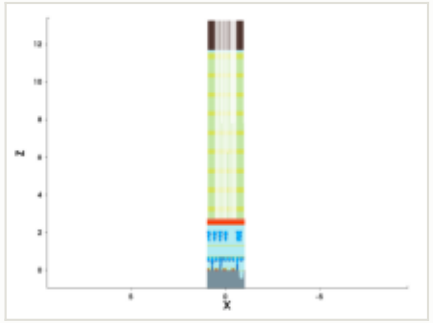


mask for this step

no mask for this step


steps by process area

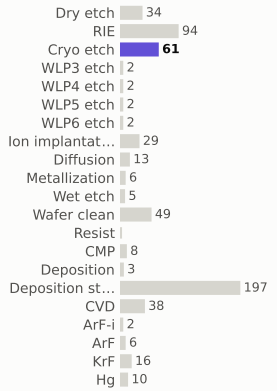

materials deposited (g)

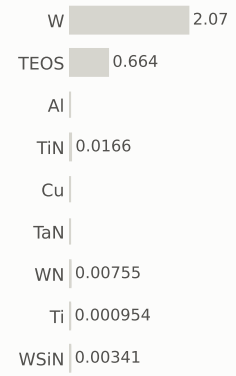

gases emitted (g)



Step #7283.1122: Cryo_etch


etch_noop · Cryo_etch

0.517	573.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




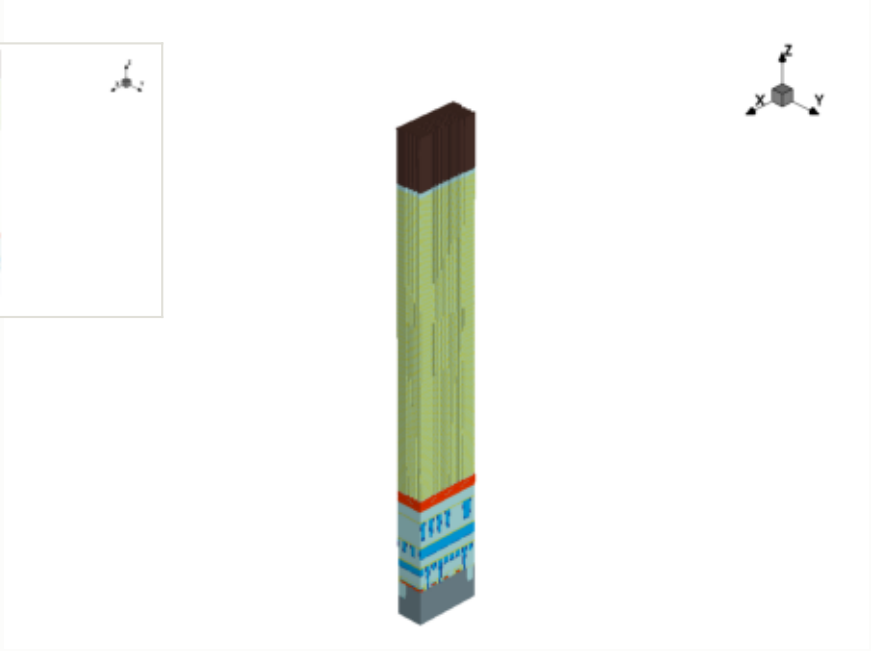

x cut at 0.000 µm

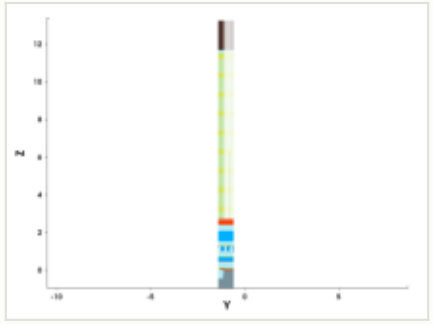

y cut at -1.035 µm

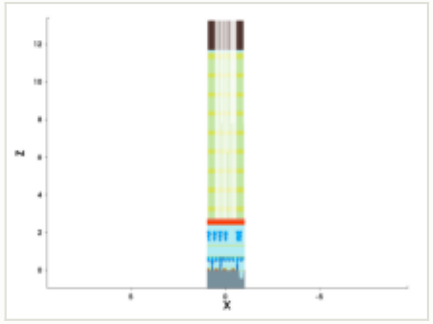

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

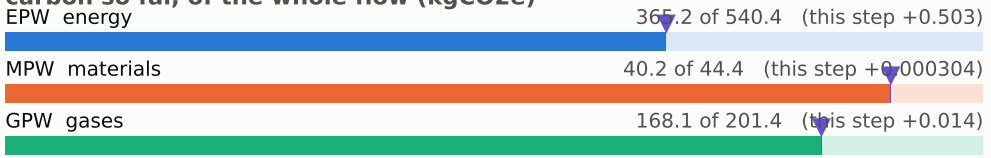


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

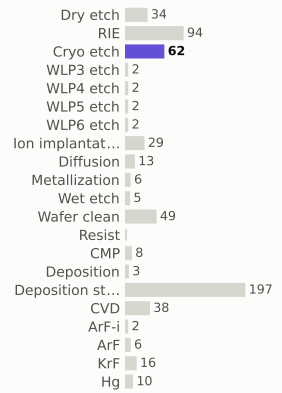

materials deposited (g)

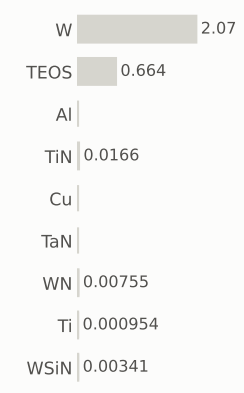

gases emitted (g)



Step #7283.1633: Cryo_etch


etch_noop · Cryo_etch

0.517	574.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




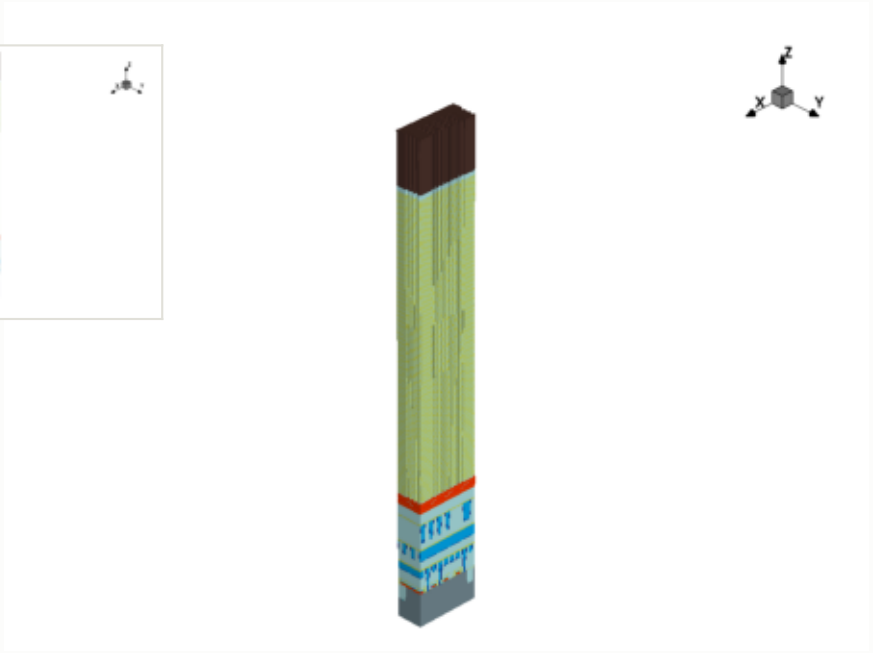

x cut at 0.000 µm

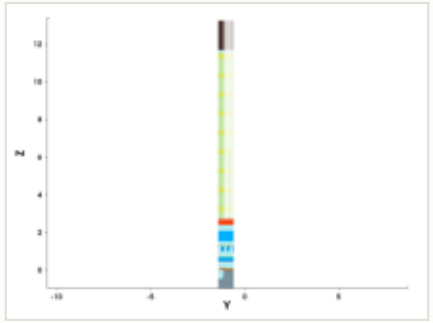

y cut at -1.035 µm

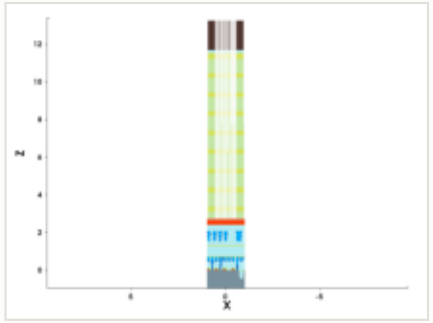

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

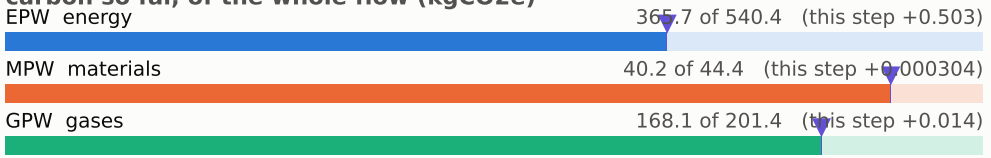


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

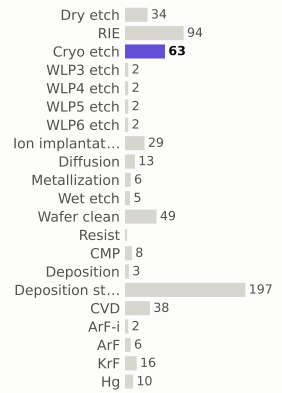

materials deposited (g)

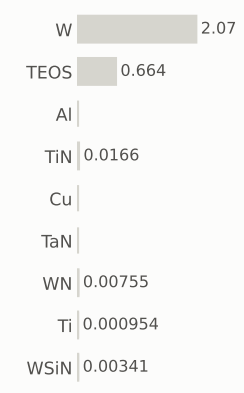

gases emitted (g)



Step #7283.2143: Cryo_etch


etch_noop · Cryo_etch

0.517	574.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




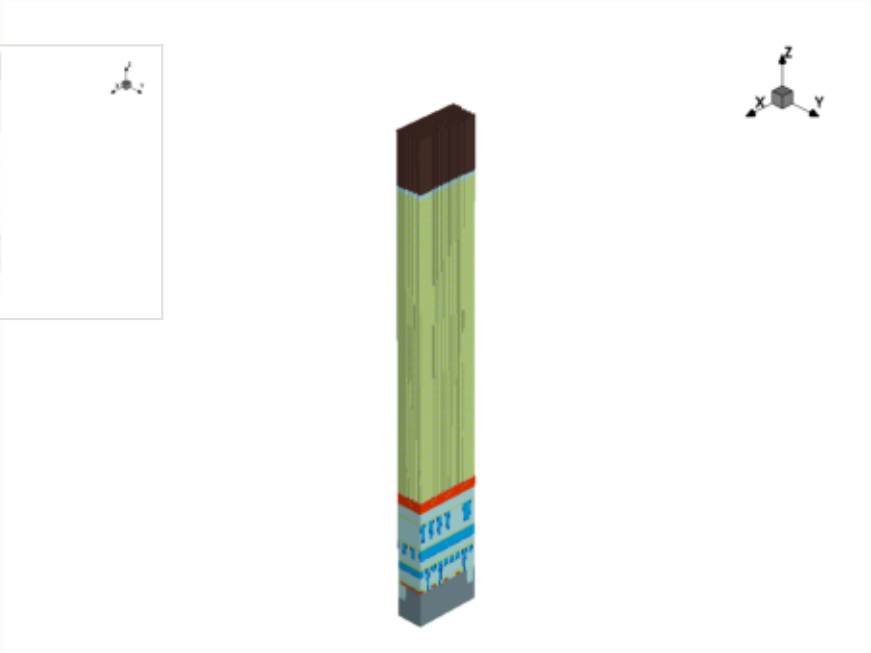

x cut at 0.000 µm

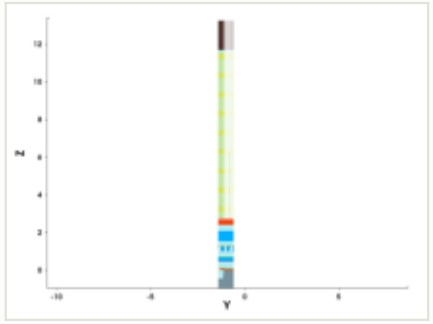

y cut at -1.035 µm

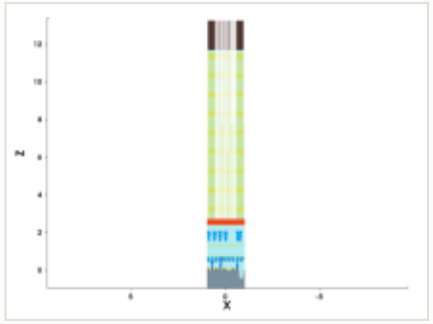

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

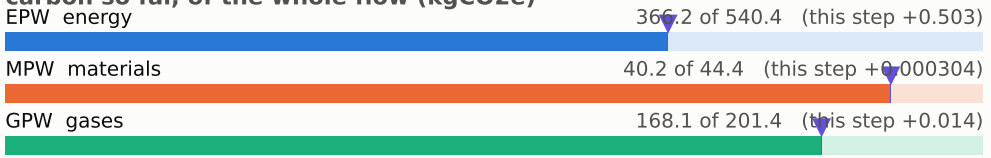


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

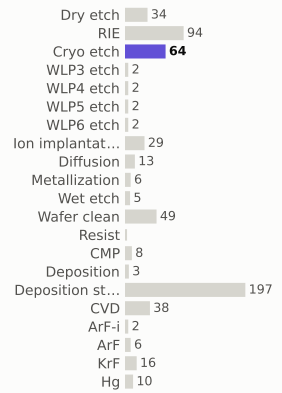

materials deposited (g)

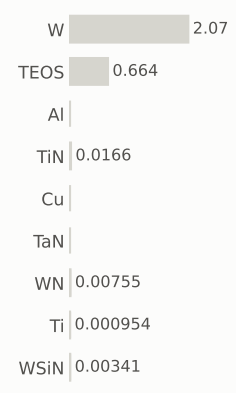

gases emitted (g)



Step #7283.2653: Cryo_etch


etch_noop · Cryo_etch

0.517	575.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




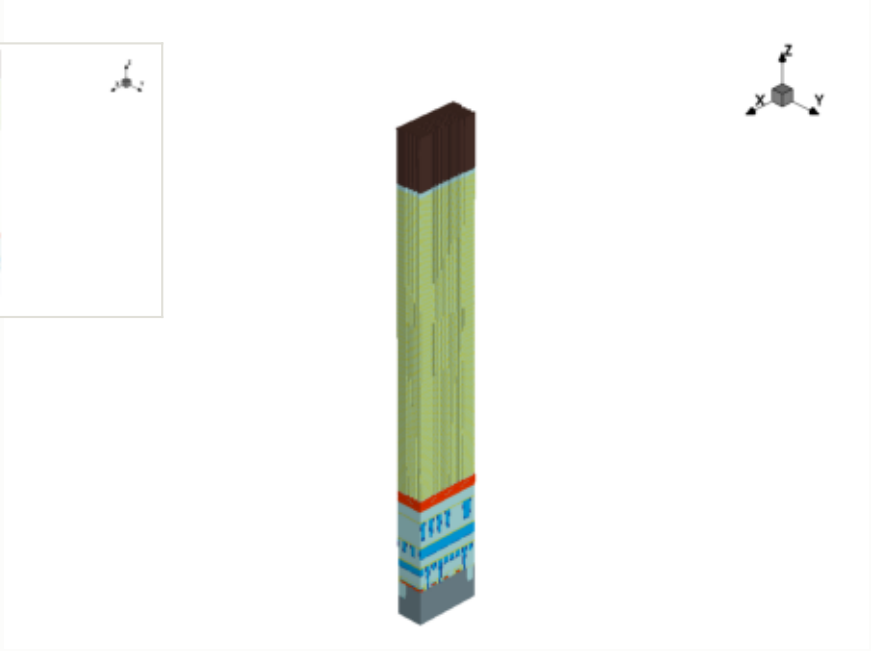

x cut at 0.000 µm

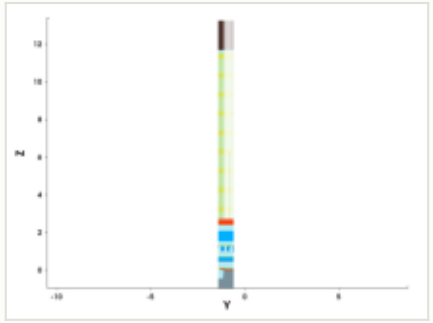

y cut at -1.035 µm

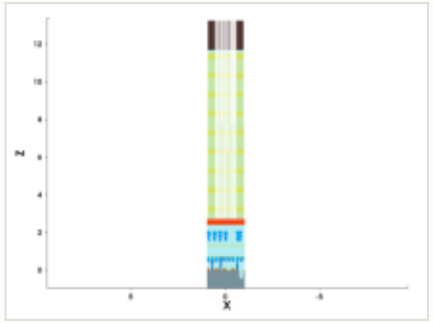

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

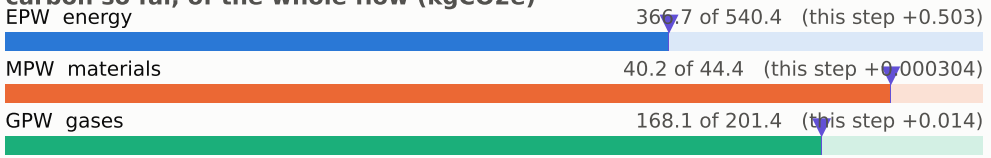


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

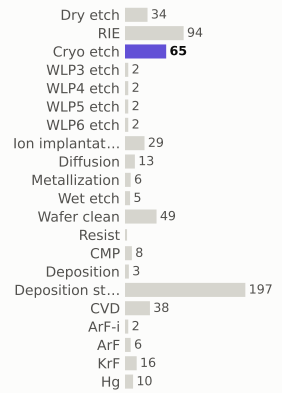

materials deposited (g)

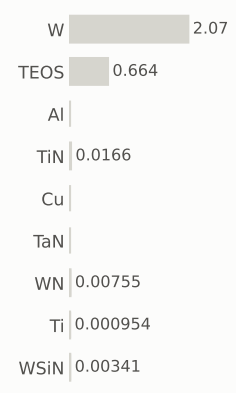

gases emitted (g)



Step #7283.3163: Cryo_etch


etch_noop · Cryo_etch

0.517	575.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




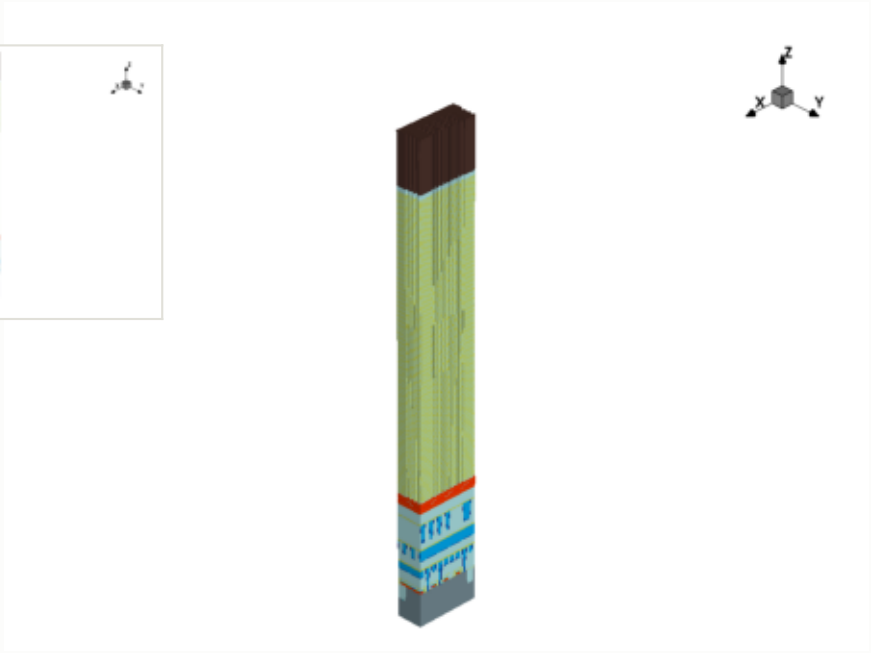

x cut at 0.000 µm

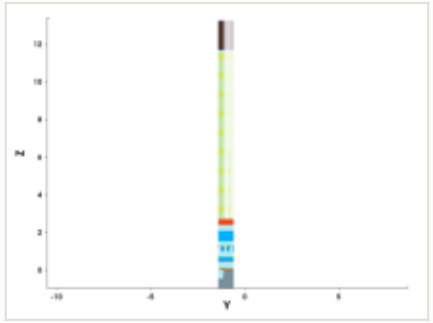

y cut at -1.035 µm

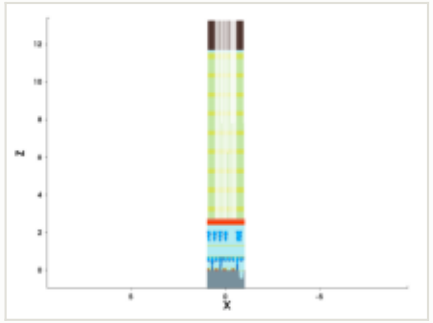

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

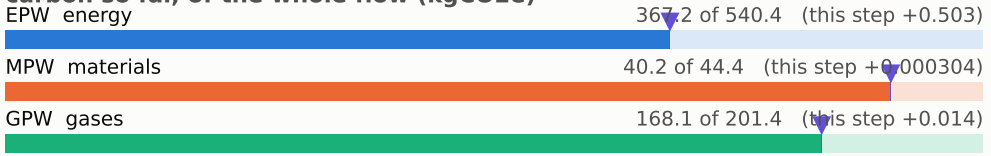


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

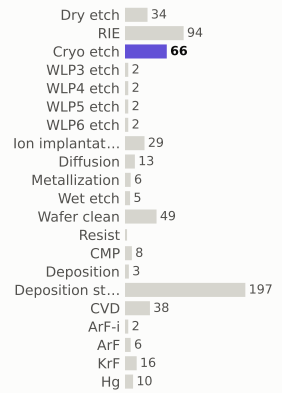

materials deposited (g)

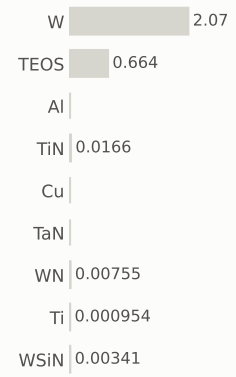

gases emitted (g)



Step #7283.3673: Cryo_etch

etch_noop · Cryo_etch

0.517	576.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

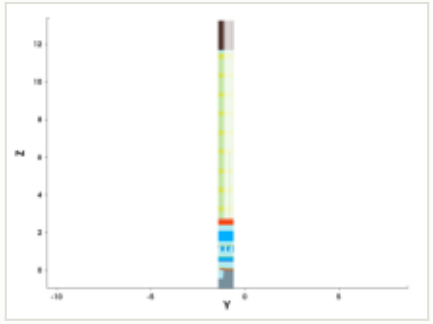

y cut at -1.035 µm

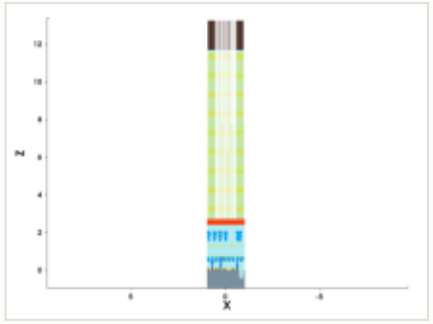

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

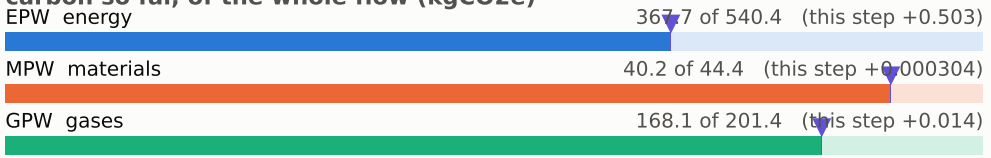


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

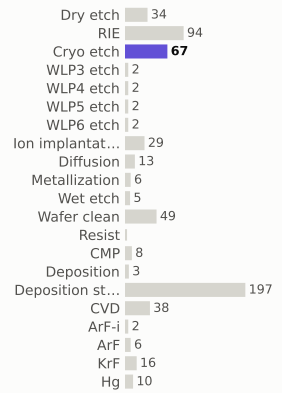

materials deposited (g)

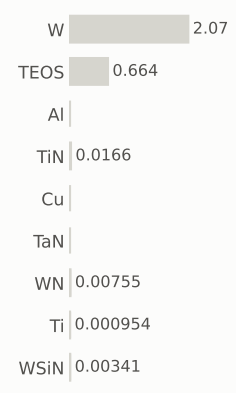

gases emitted (g)



Step #7283.4184: Cryo_etch


etch_noop · Cryo_etch

0.517	576.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




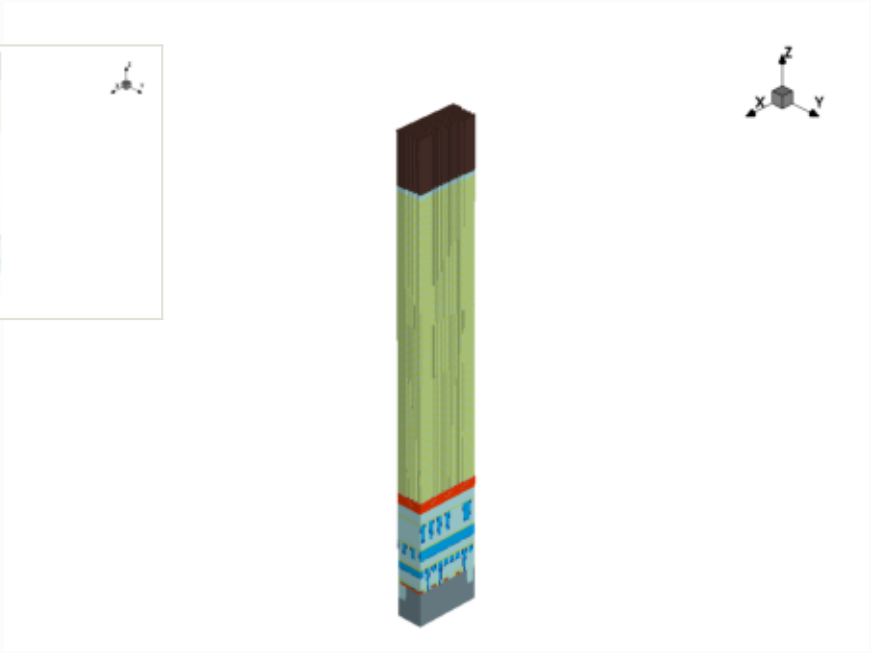

x cut at 0.000 µm

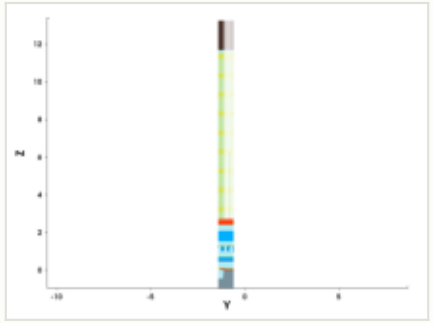

y cut at -1.035 µm

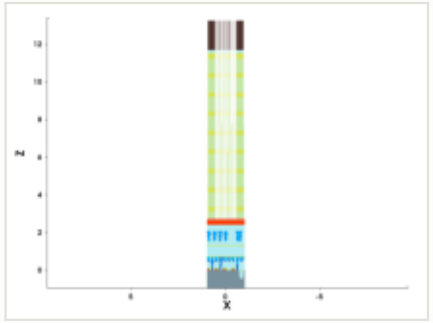

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

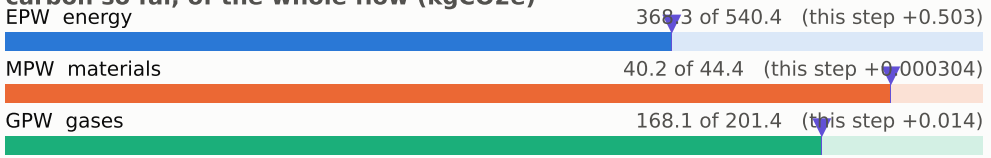


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

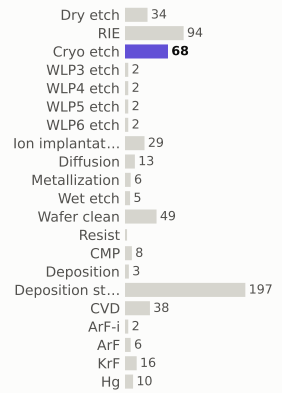

materials deposited (g)

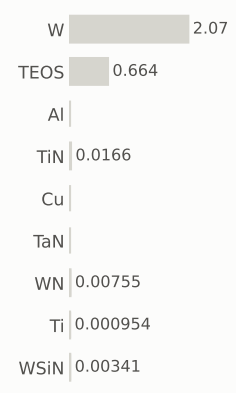

gases emitted (g)



Step #7283.4694: Cryo_etch


etch_noop · Cryo_etch

0.517	577.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




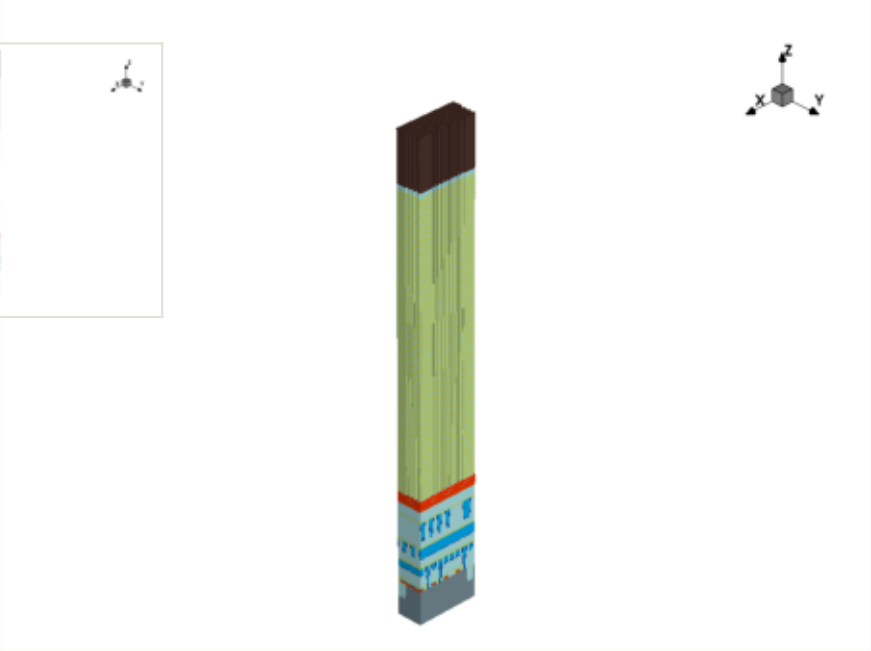

x cut at 0.000 µm

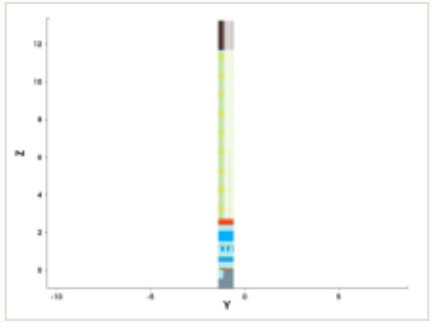

y cut at -1.035 µm

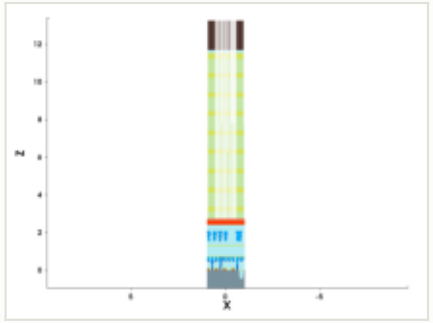

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

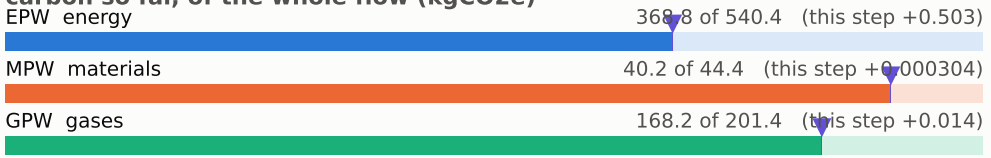


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

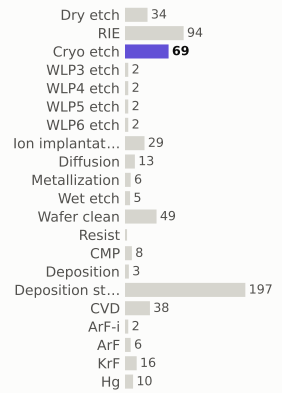

materials deposited (g)

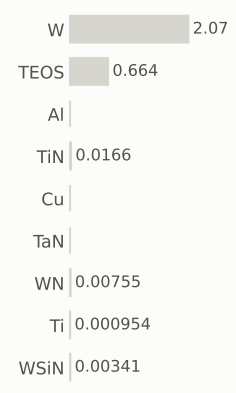

gases emitted (g)



Step #7283.5204: Cryo_etch


etch_noop · Cryo_etch

0.517	577.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




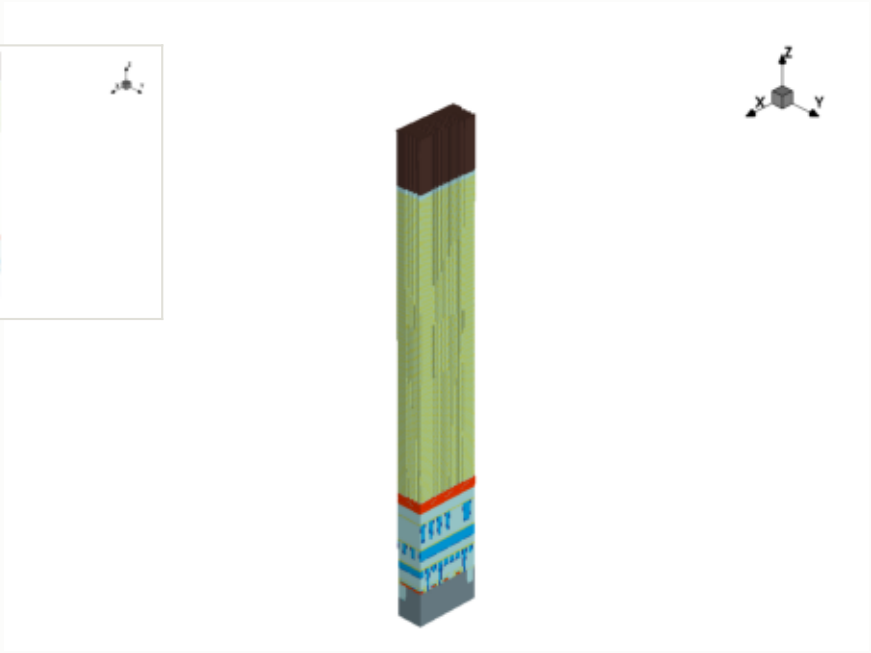

x cut at 0.000 µm

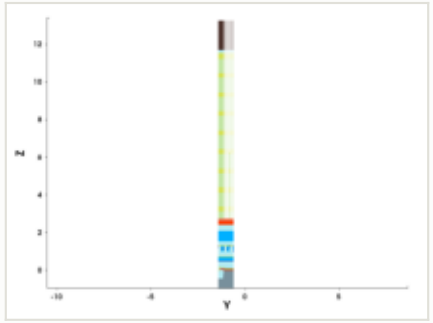

y cut at -1.035 µm

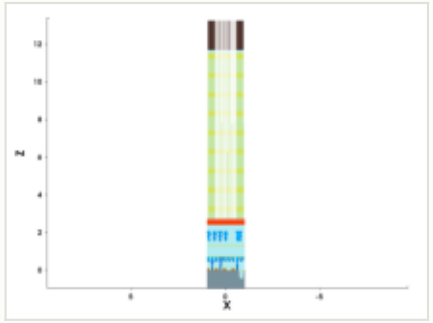

mask for this step


no mask for this step

this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

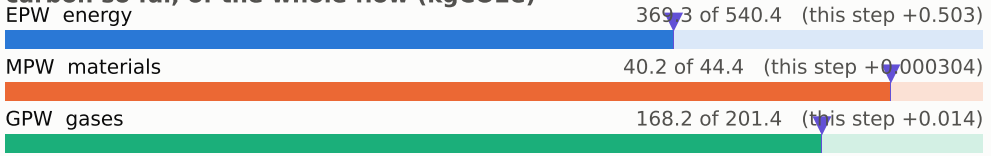


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

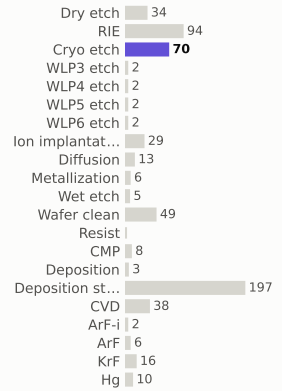

materials deposited (g)

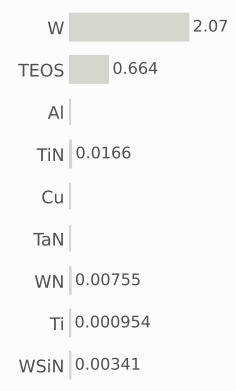

gases emitted (g)



Step #7283.5714: Cryo_etch


etch_noop · Cryo_etch

0.517	578.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




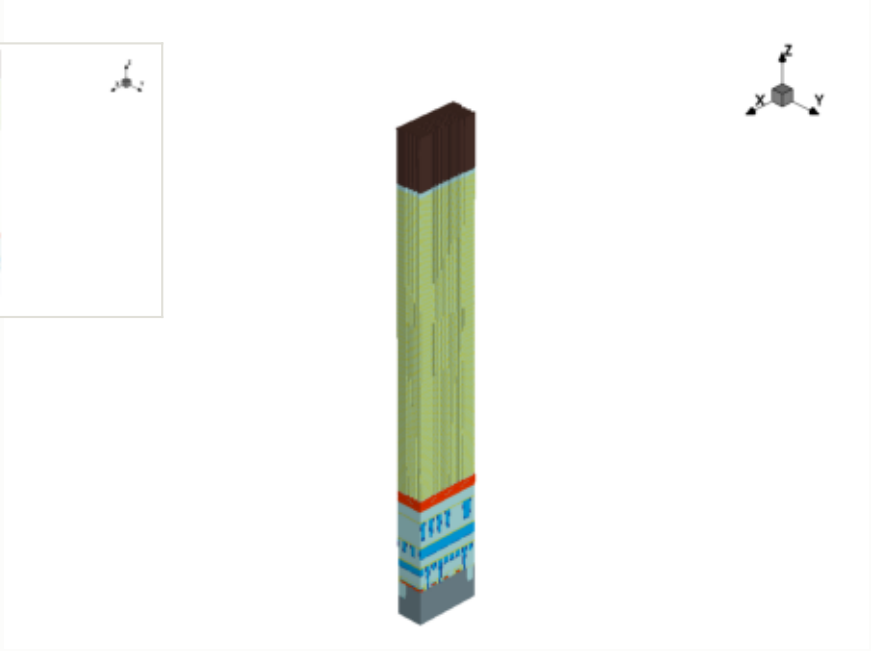

x cut at 0.000 µm

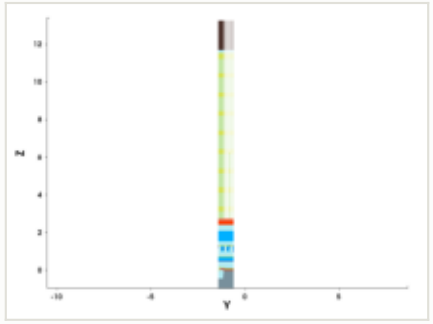

y cut at -1.035 µm

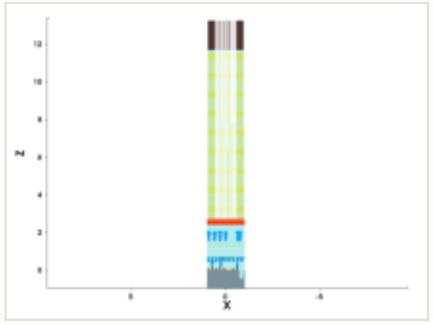

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

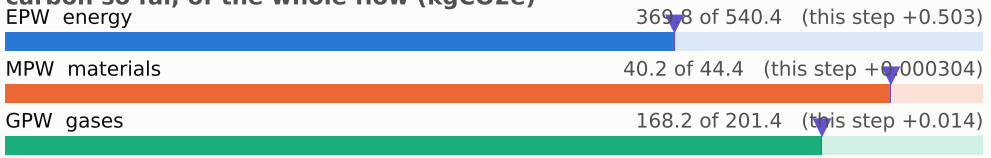


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

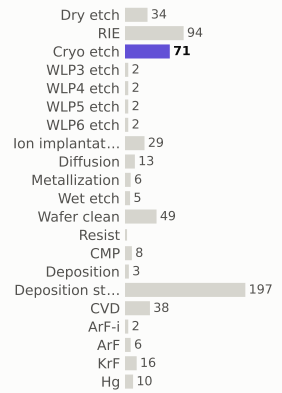

materials deposited (g)



gases emitted (g)



Step #7283.6224: Cryo_etch


etch_noop · Cryo_etch

0.517	578.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




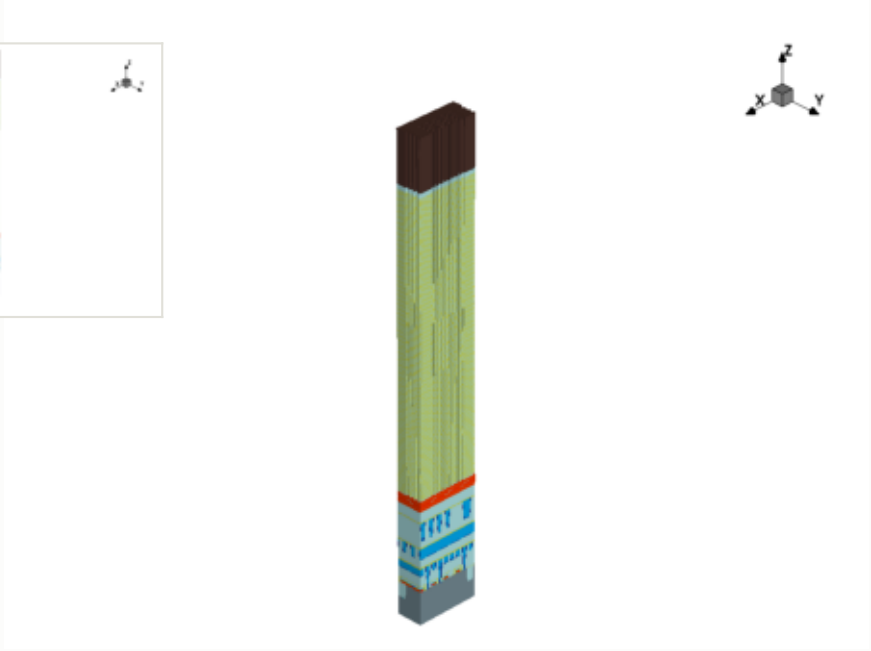

x cut at 0.000 µm

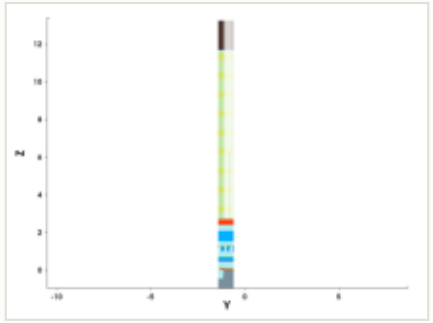

y cut at -1.035 µm

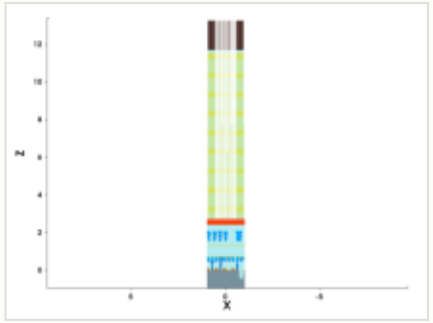

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

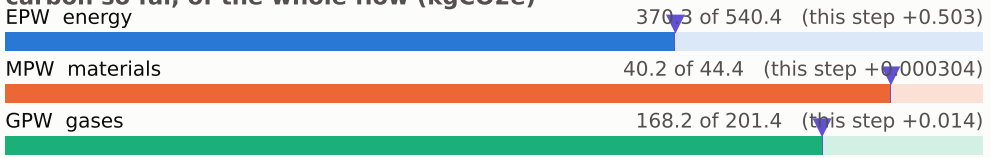


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

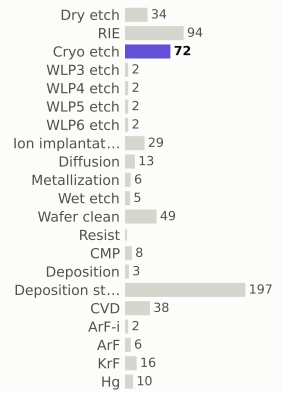

materials deposited (g)

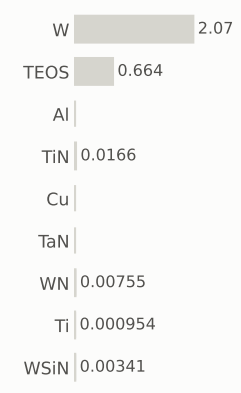

gases emitted (g)



Step #7283.6735: Cryo_etch


etch_noop · Cryo_etch

0.517	579.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




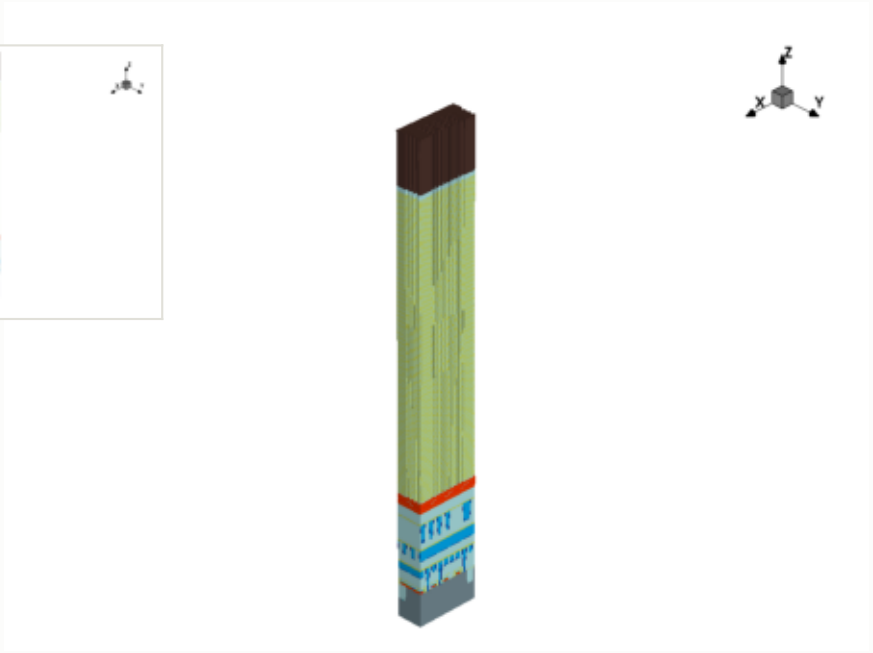

x cut at 0.000 µm

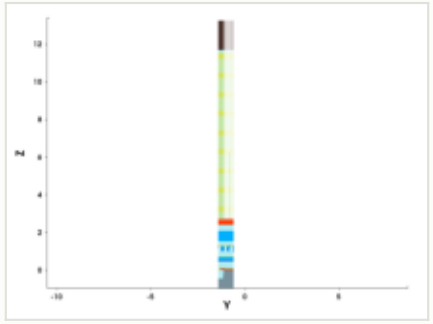

y cut at -1.035 µm

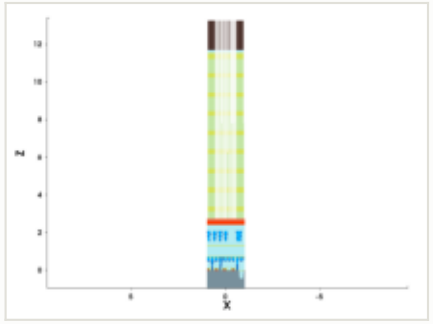

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

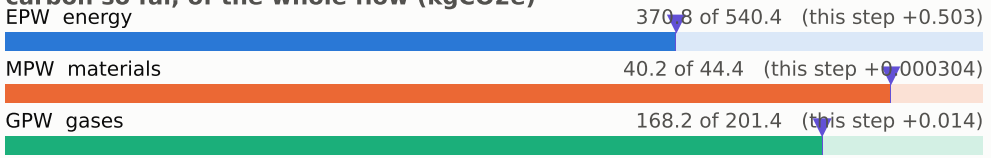


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

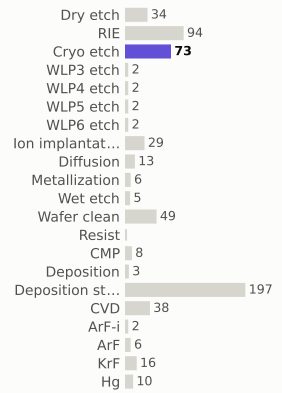

materials deposited (g)

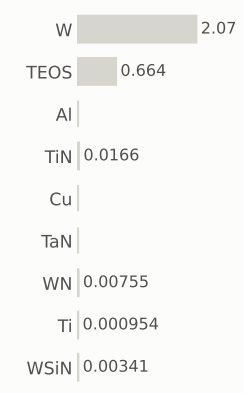

gases emitted (g)



Step #7283.7245: Cryo_etch


etch_noop · Cryo_etch

0.517	579.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




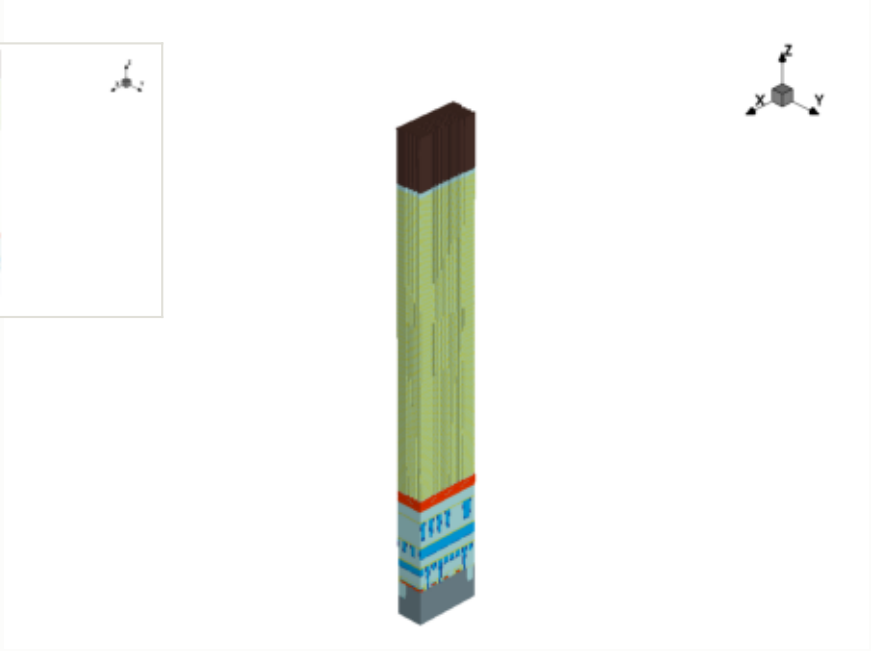

x cut at 0.000 µm

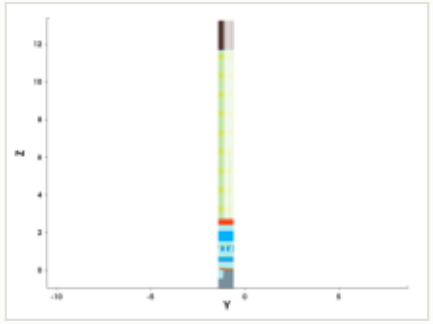

y cut at -1.035 µm

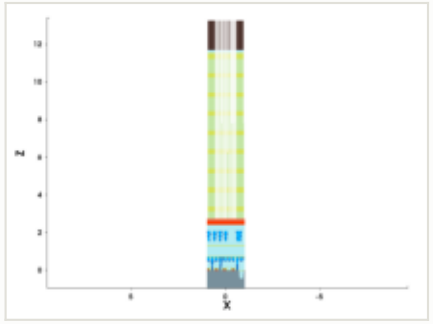

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

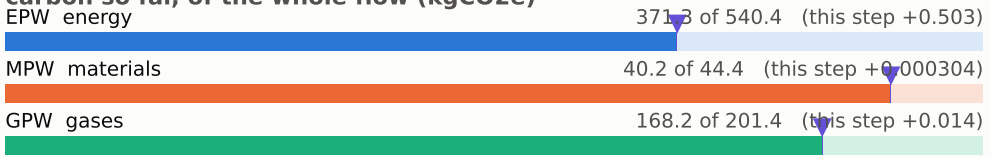


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

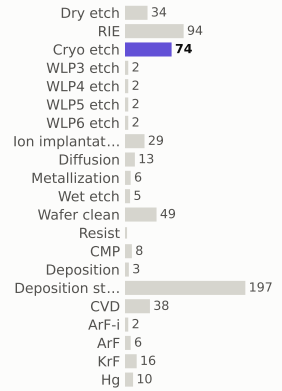

materials deposited (g)

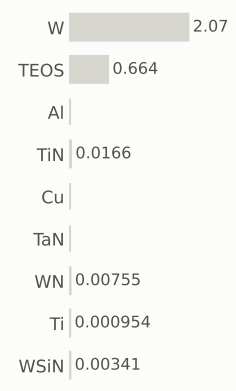

gases emitted (g)



Step #7283.7755: Cryo_etch


etch_noop · Cryo_etch

0.517	580.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




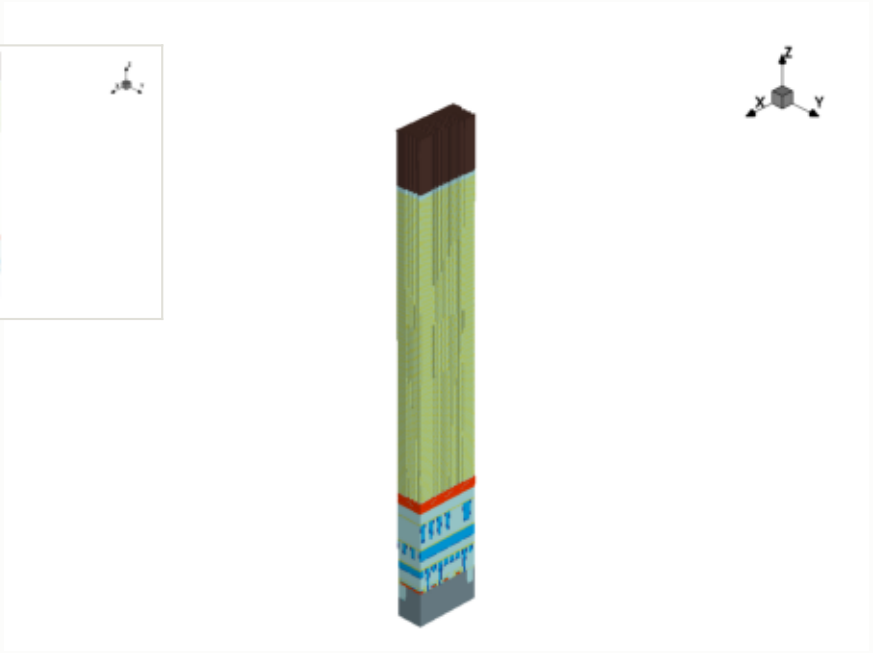

x cut at 0.000 µm

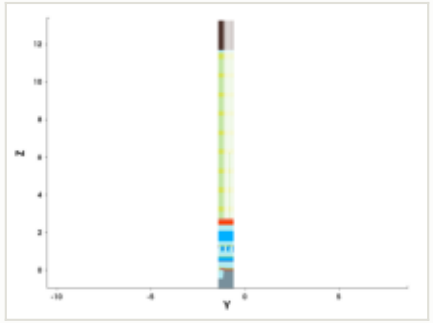

y cut at -1.035 µm

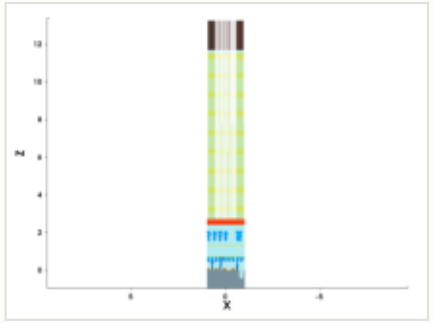

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

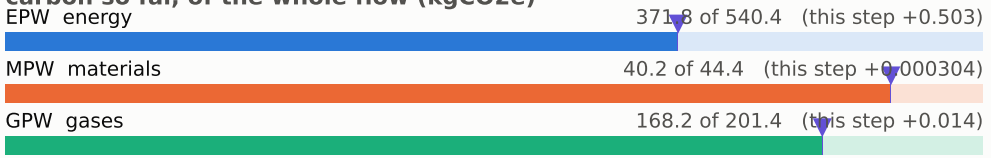


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

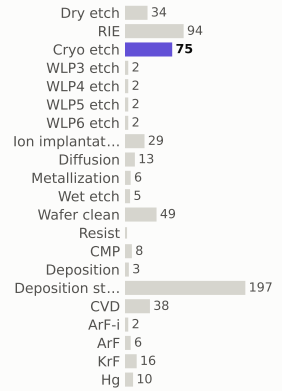

materials deposited (g)

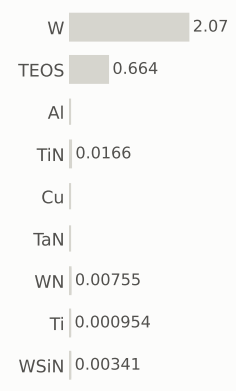

gases emitted (g)



Step #7283.8265: Cryo_etch


etch_noop · Cryo_etch

0.517	580.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




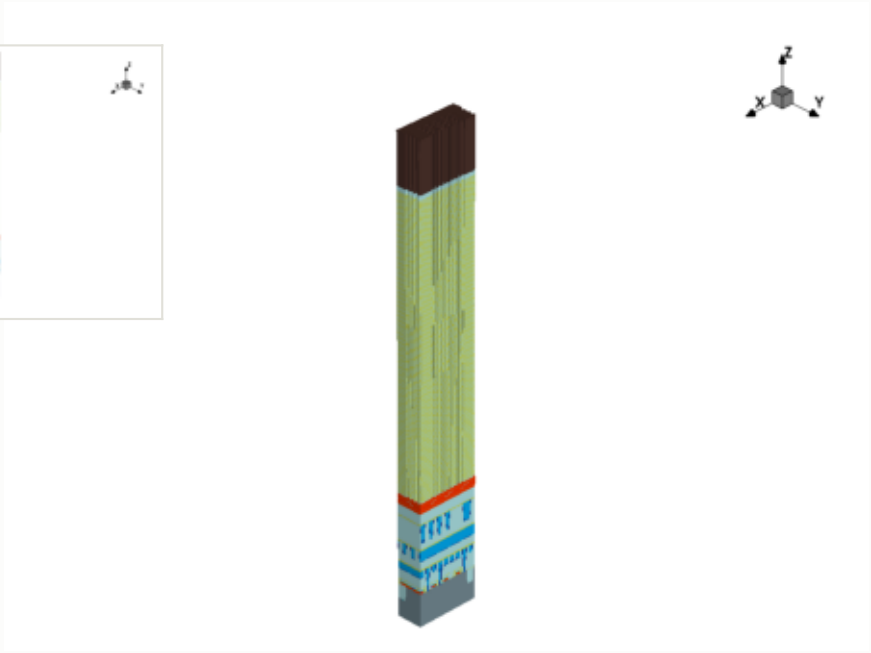

x cut at 0.000 µm

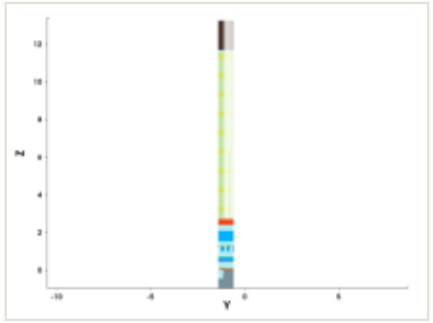

y cut at -1.035 µm

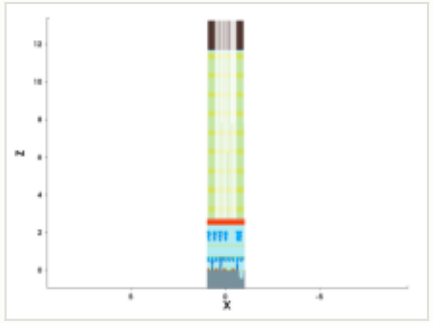

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

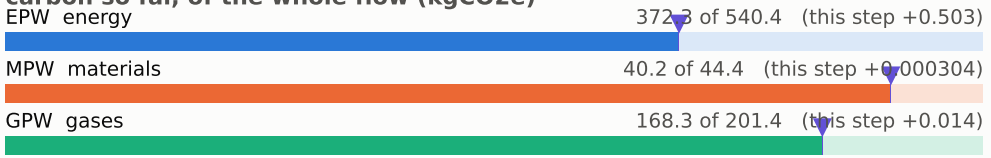


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

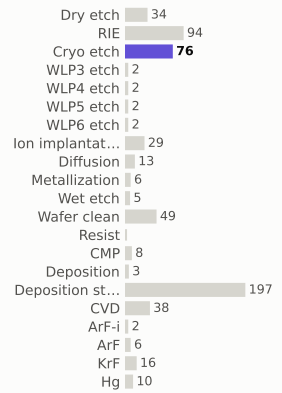

materials deposited (g)

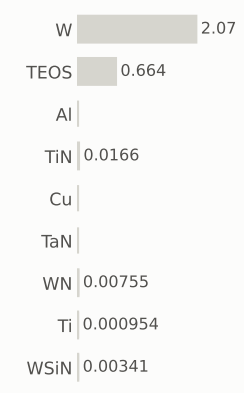

gases emitted (g)



Step #7283.8776: Cryo_etch


etch_noop · Cryo_etch

0.517	581.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




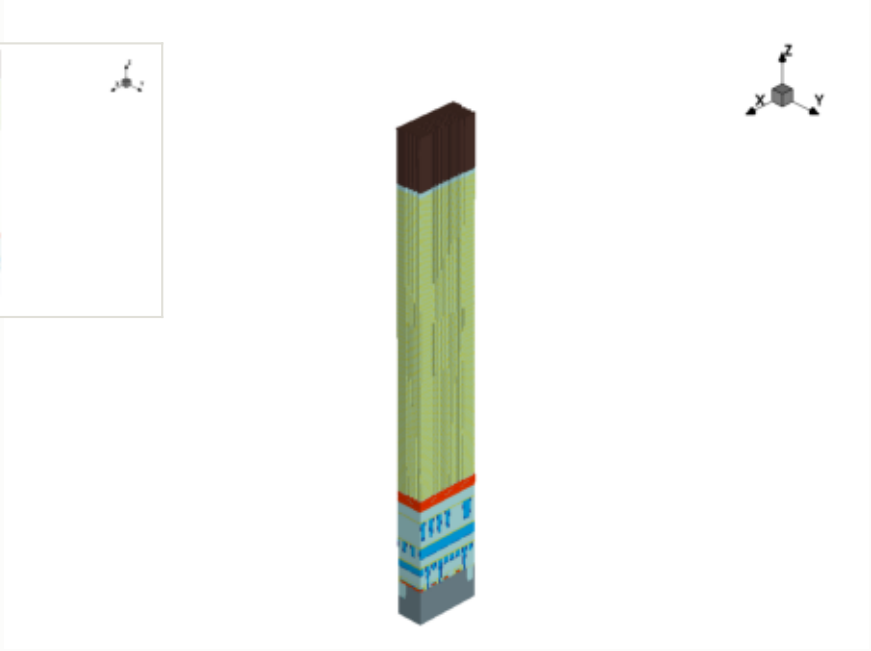

x cut at 0.000 µm

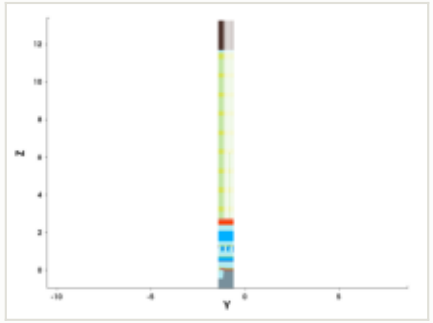

y cut at -1.035 µm

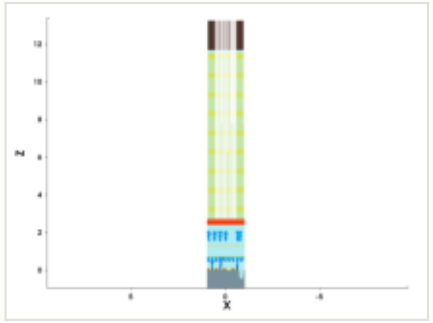

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

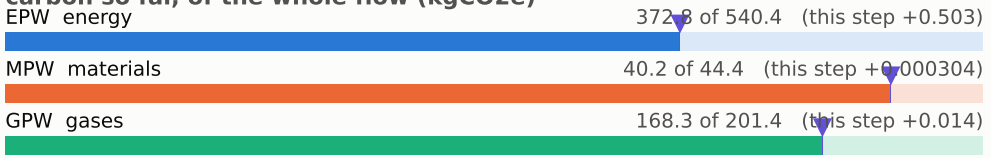


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

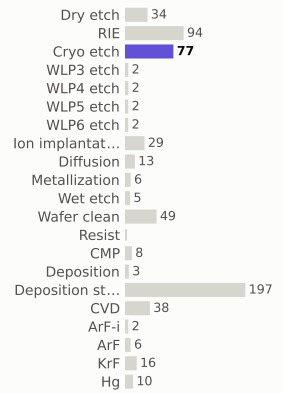

materials deposited (g)

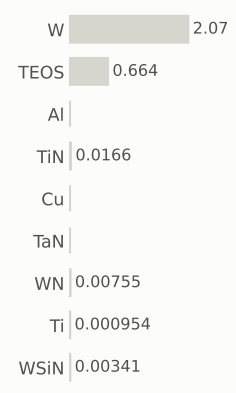

gases emitted (g)



Step #7283.9286: Cryo_etch


etch_noop · Cryo_etch

0.517	581.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




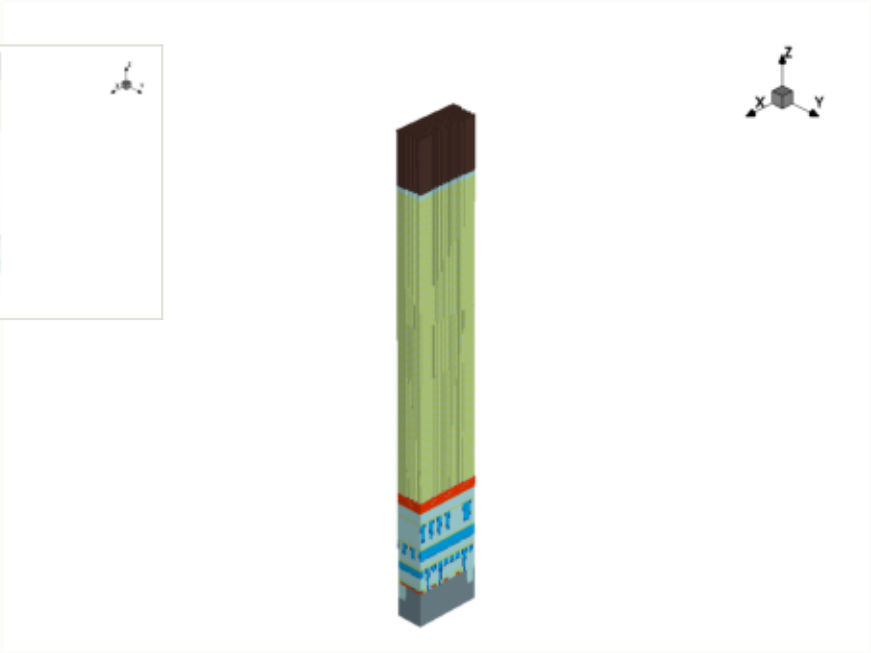

x cut at 0.000 µm

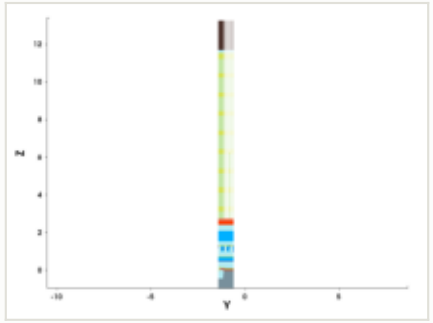

y cut at -1.035 µm

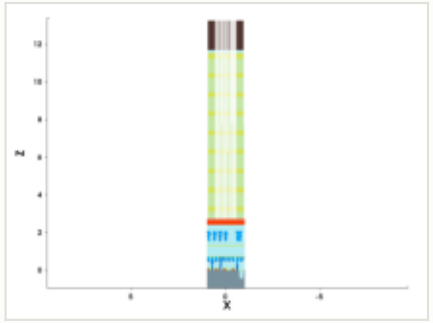

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

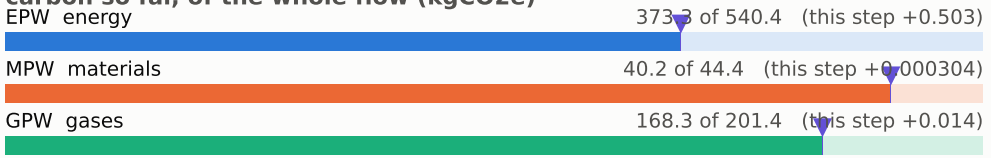


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

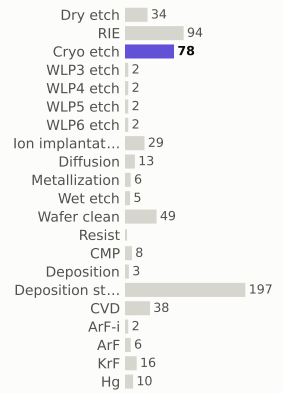

materials deposited (g)

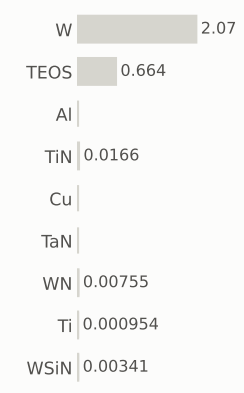

gases emitted (g)



Step #7283.9796: Cryo_etch


etch_noop · Cryo_etch

0.517	582.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




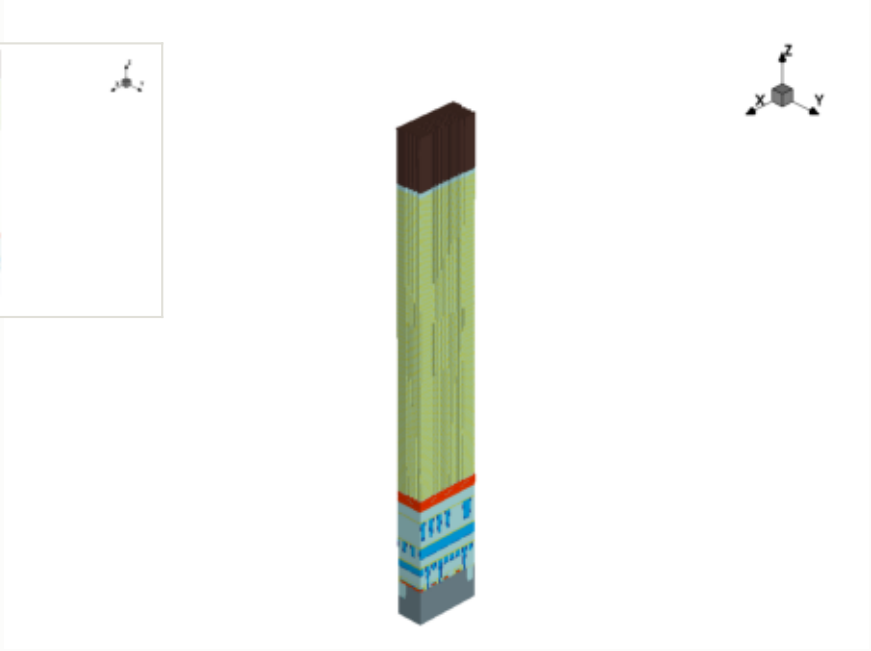

x cut at 0.000 µm

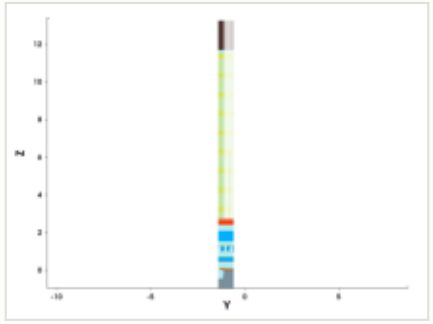

y cut at -1.035 µm

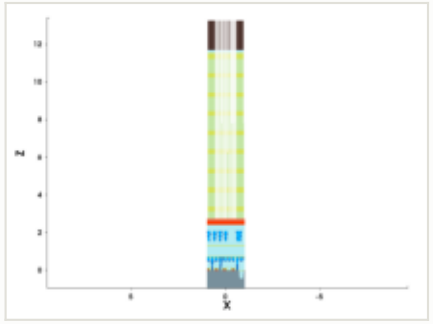

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

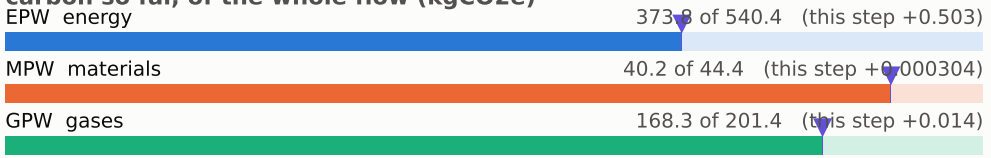


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

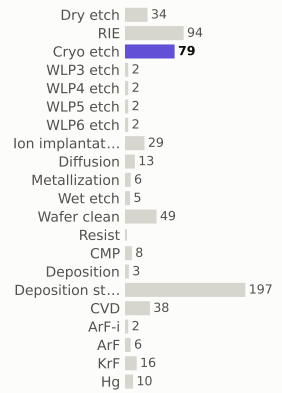

materials deposited (g)

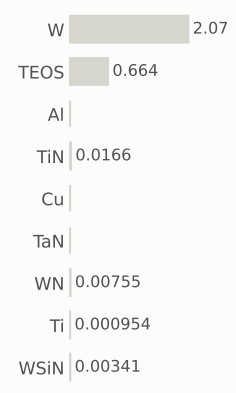

gases emitted (g)



Step #7284.0306: Cryo_etch


etch_noop · Cryo_etch

0.517	582.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




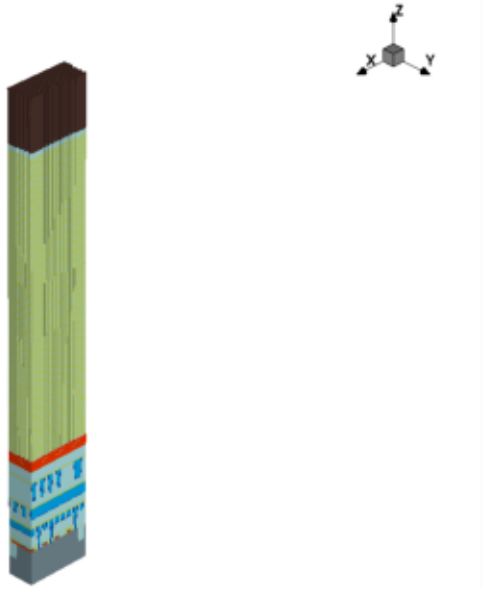

x cut at 0.000 µm

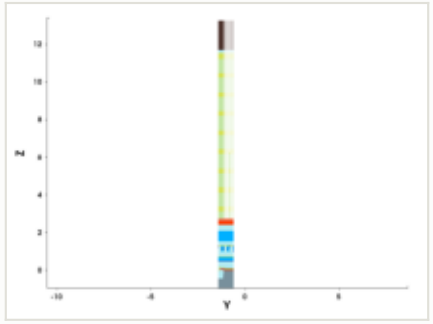

y cut at -1.035 µm

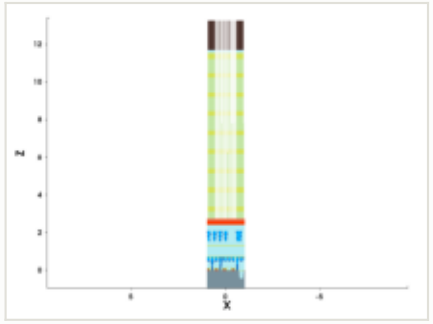

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

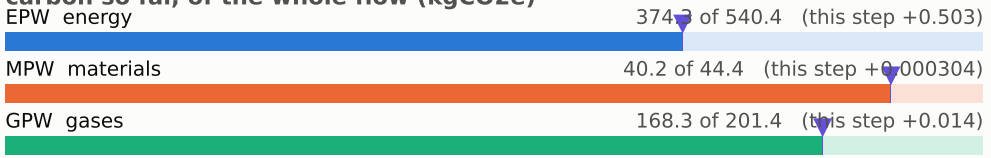


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

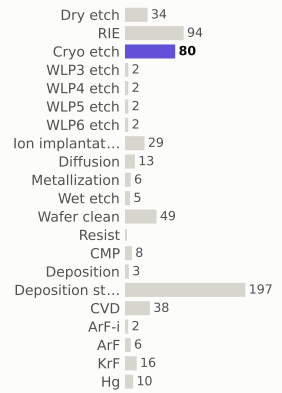

materials deposited (g)

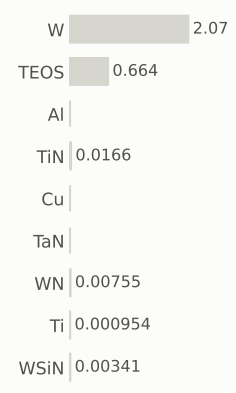

gases emitted (g)



Step #7284.0816: Cryo_etch


etch_noop · Cryo_etch

0.517	583.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




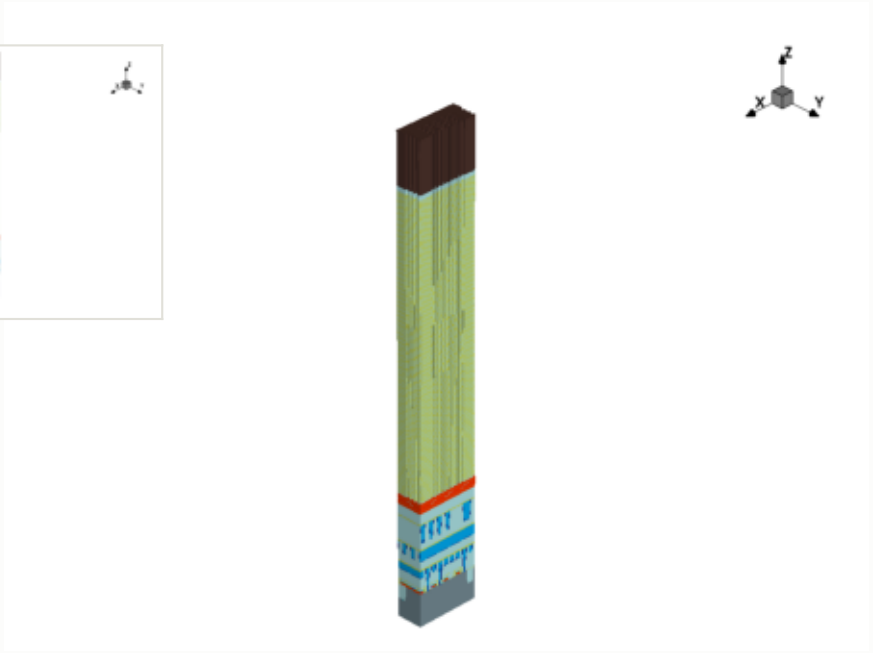

x cut at 0.000 µm

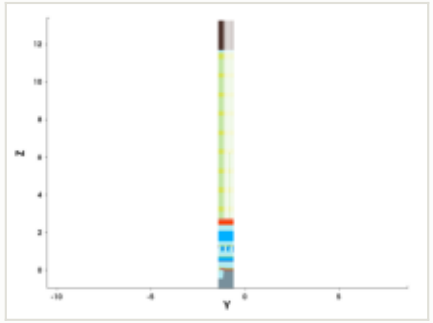

y cut at -1.035 µm

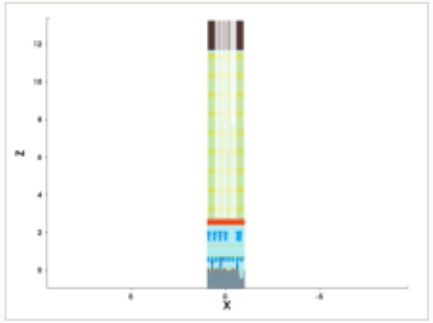

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

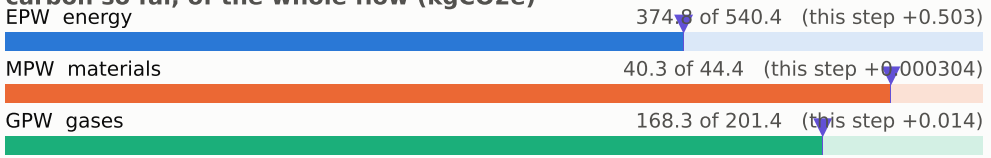


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

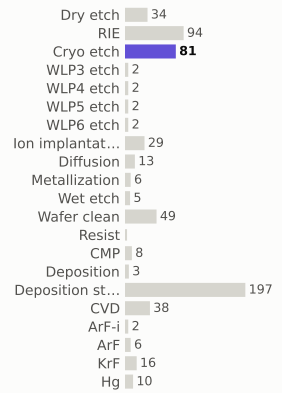

materials deposited (g)

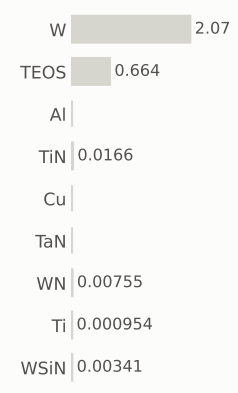

gases emitted (g)



Step #7284.1327: Cryo_etch


etch_noop · Cryo_etch

0.517	583.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




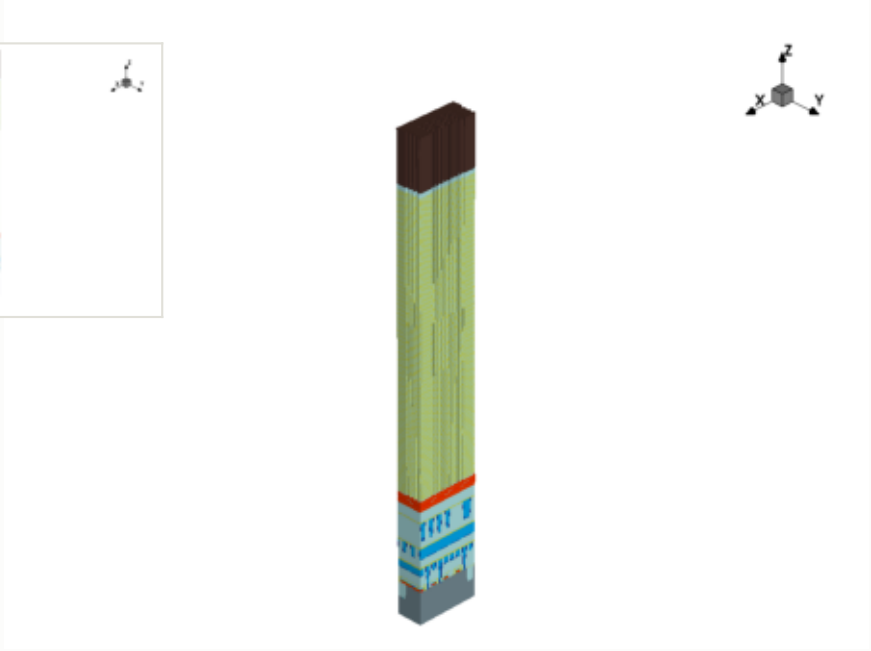

x cut at 0.000 µm

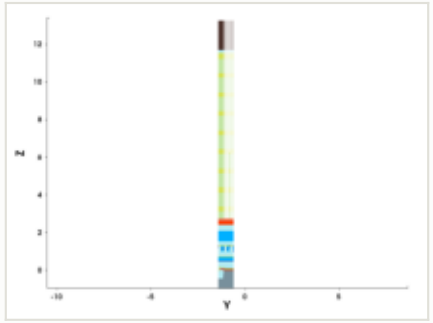

y cut at -1.035 µm

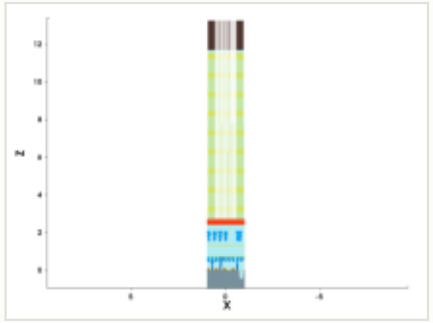

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

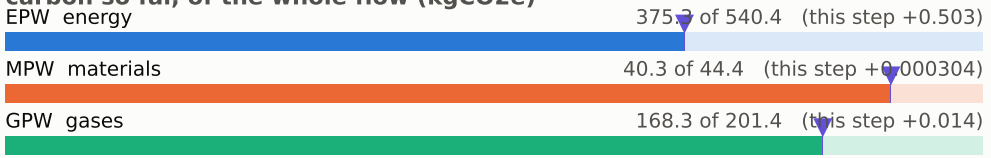


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

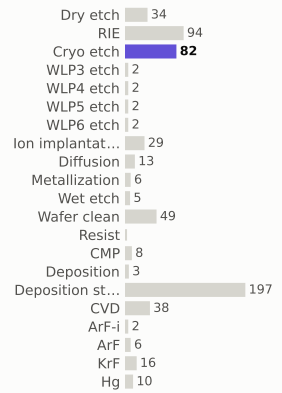

materials deposited (g)

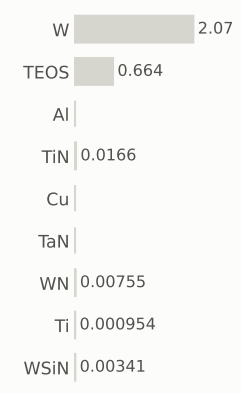

gases emitted (g)



Step #7284.1837: Cryo_etch


etch_noop · Cryo_etch

0.517	584.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




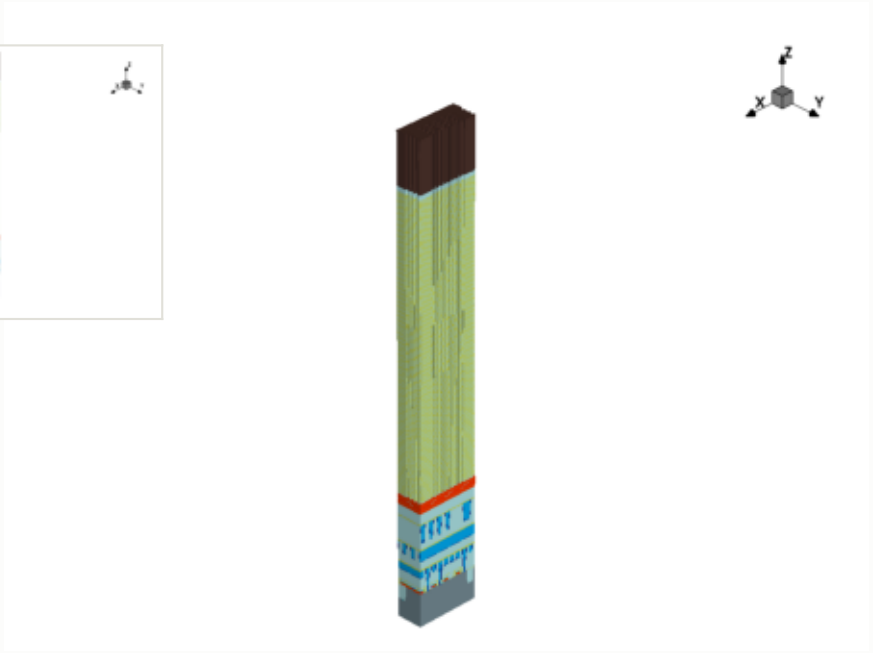

x cut at 0.000 µm

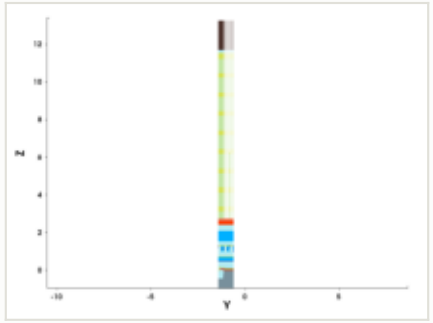

y cut at -1.035 µm

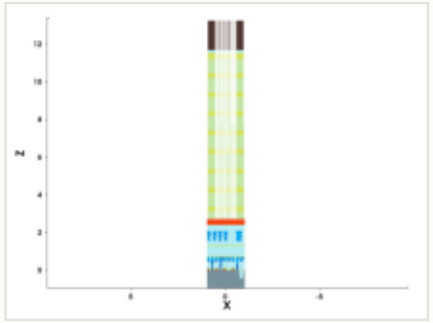

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

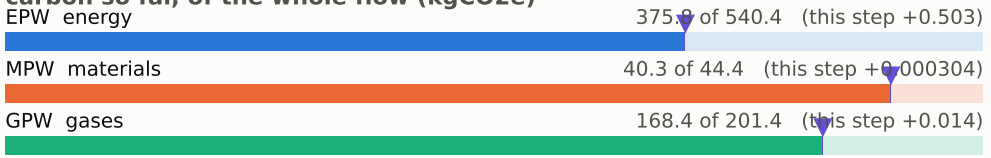


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

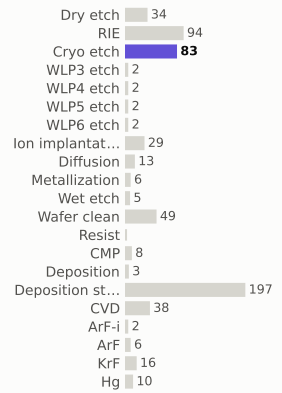

materials deposited (g)

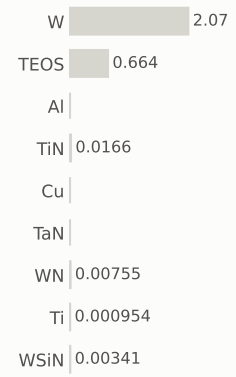

gases emitted (g)



Step #7284.2347: Cryo_etch


etch_noop · Cryo_etch

0.517	584.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




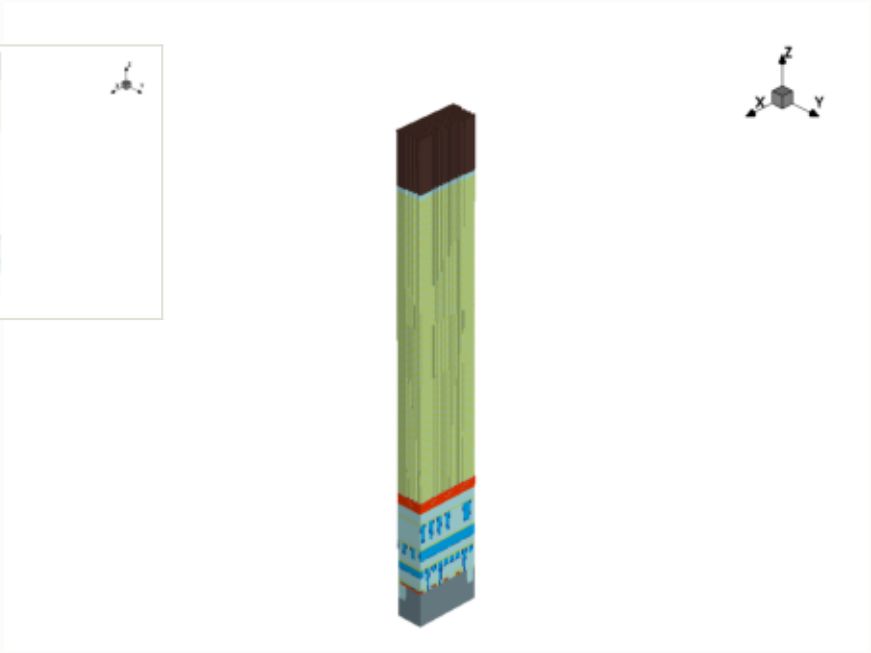

x cut at 0.000 µm

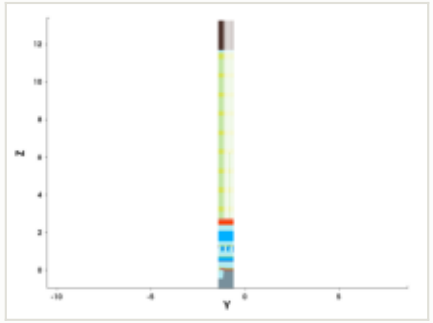

y cut at -1.035 µm

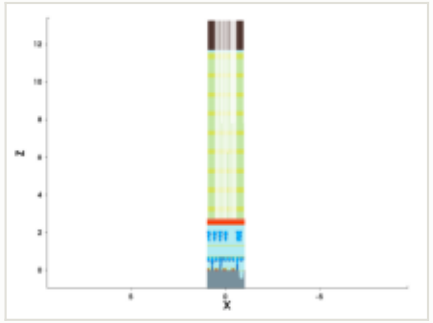

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

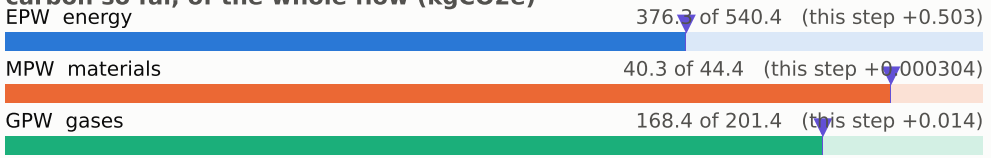


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

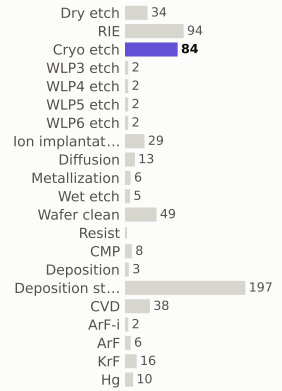

materials deposited (g)

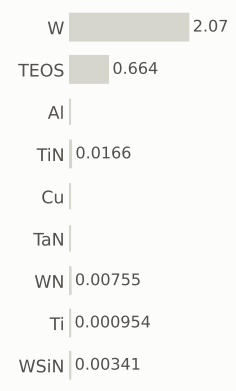

gases emitted (g)



Step #7284.2857: Cryo_etch


etch_noop · Cryo_etch

0.517	585.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




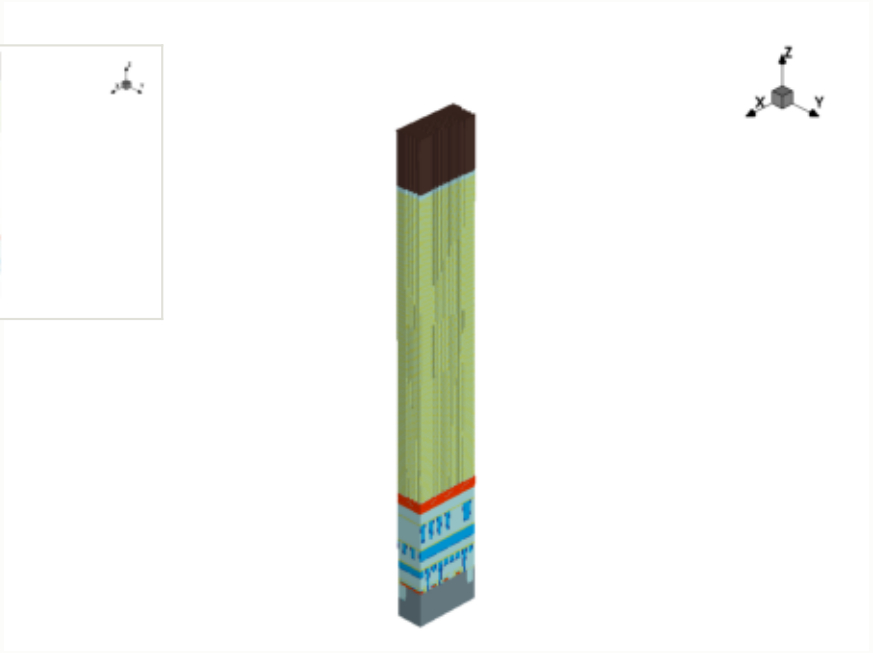

x cut at 0.000 µm

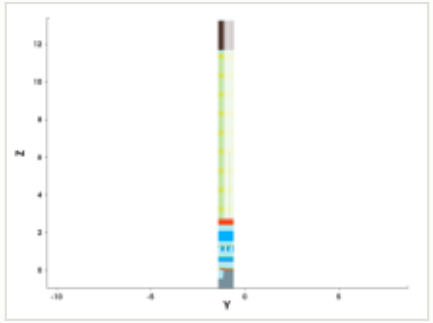

y cut at -1.035 µm

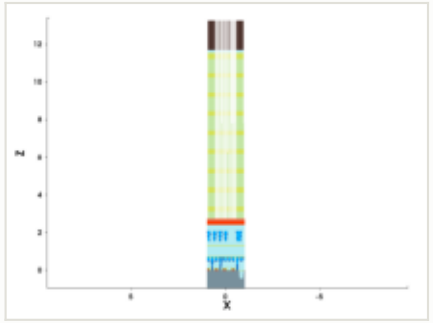

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

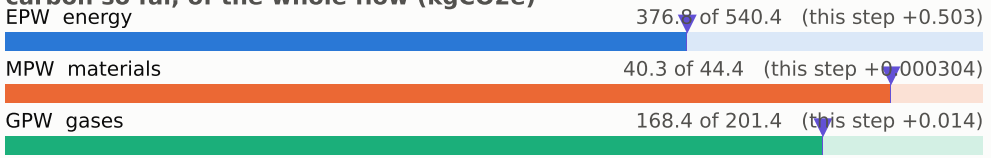


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

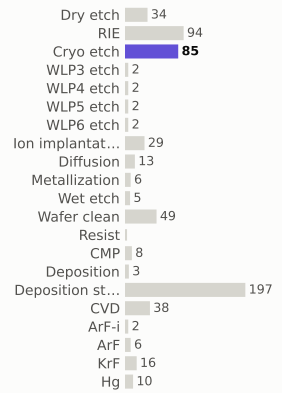

materials deposited (g)

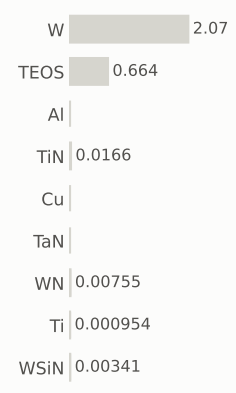

gases emitted (g)



Step #7284.3367: Cryo_etch


etch_noop · Cryo_etch

0.517	585.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




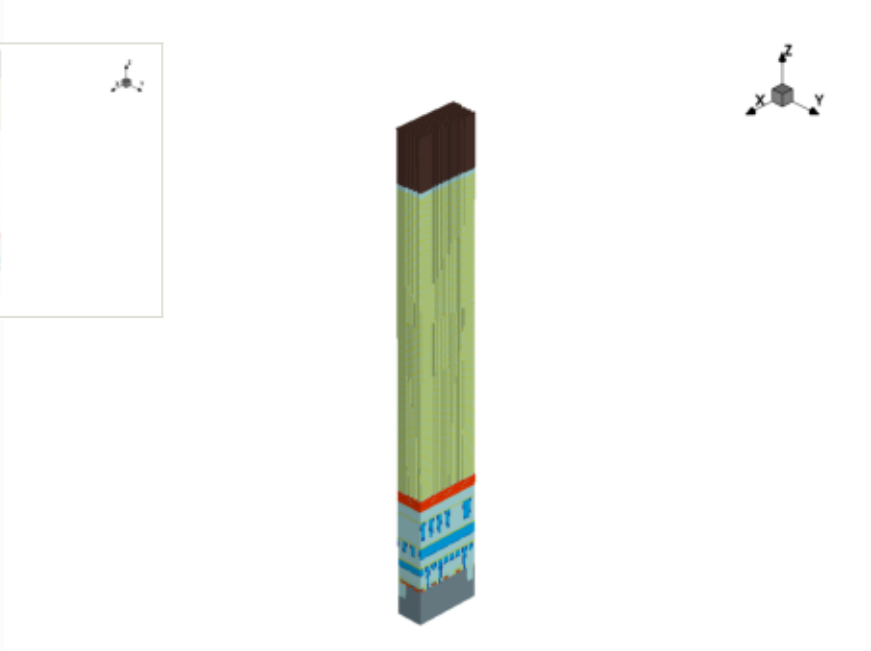

x cut at 0.000 µm

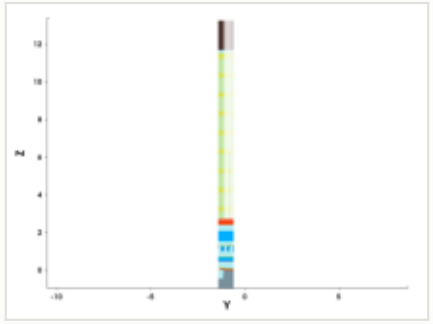

y cut at -1.035 µm

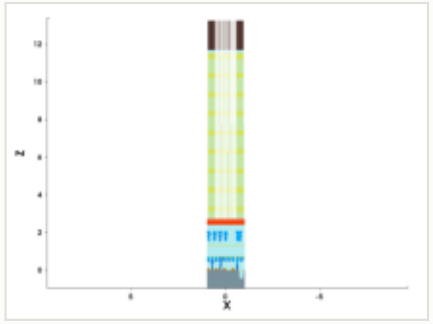

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

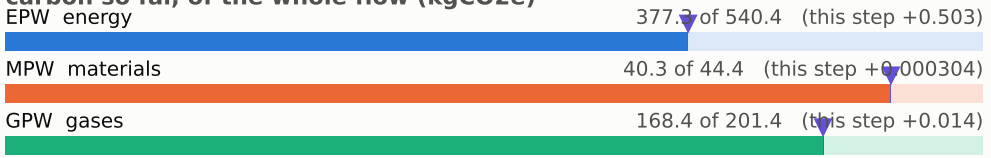


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

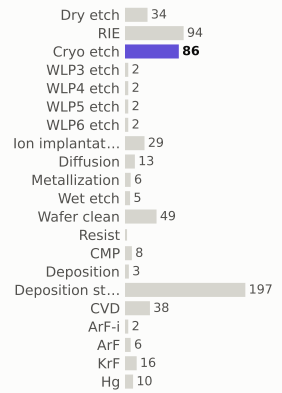

materials deposited (g)

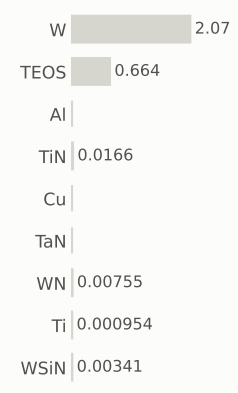

gases emitted (g)



Step #7284.3878: Cryo_etch


etch_noop · Cryo_etch

0.517	586.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




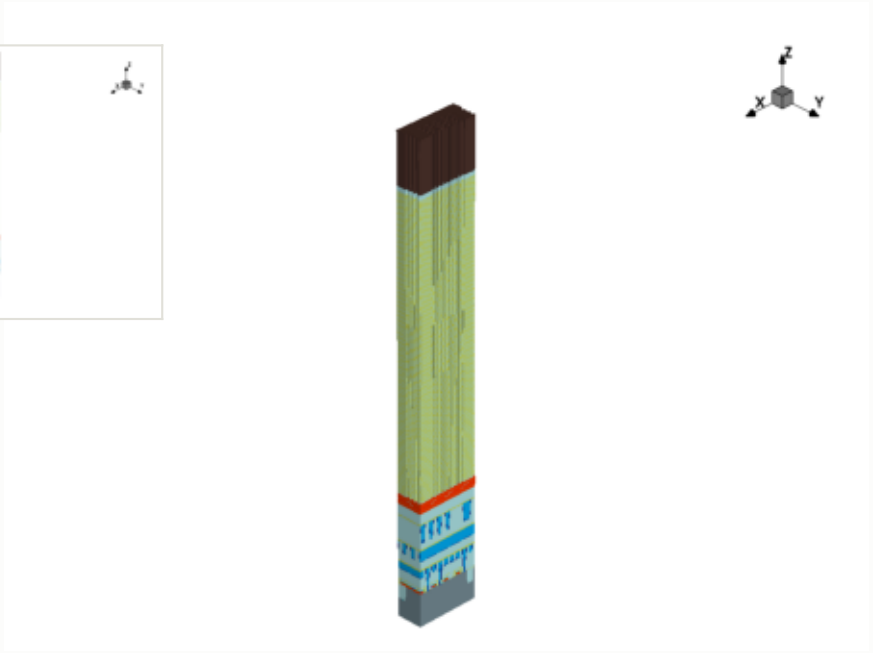

x cut at 0.000 µm

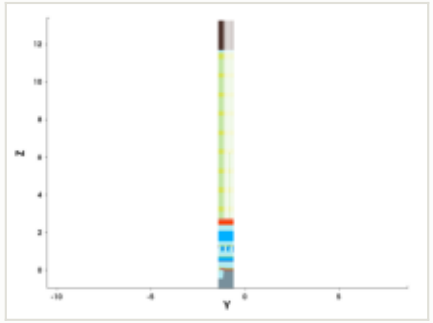

y cut at -1.035 µm

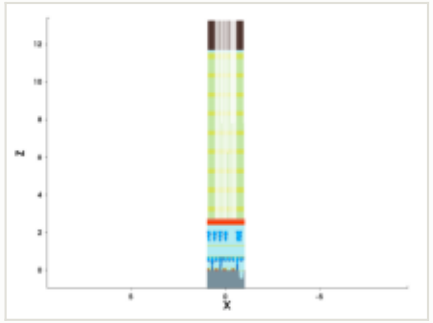

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

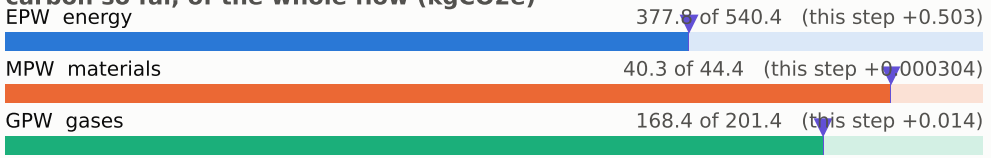


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

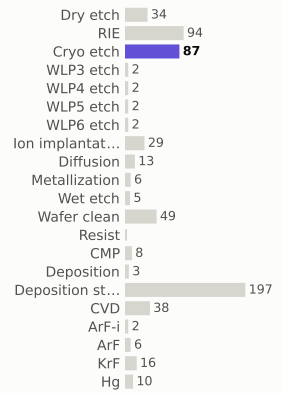

materials deposited (g)

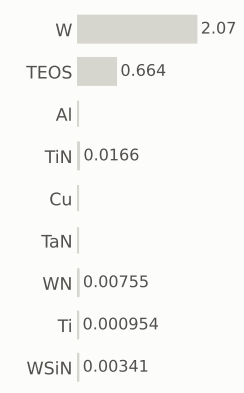

gases emitted (g)



Step #7284.4388: Cryo_etch


etch_noop · Cryo_etch

0.517	587.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




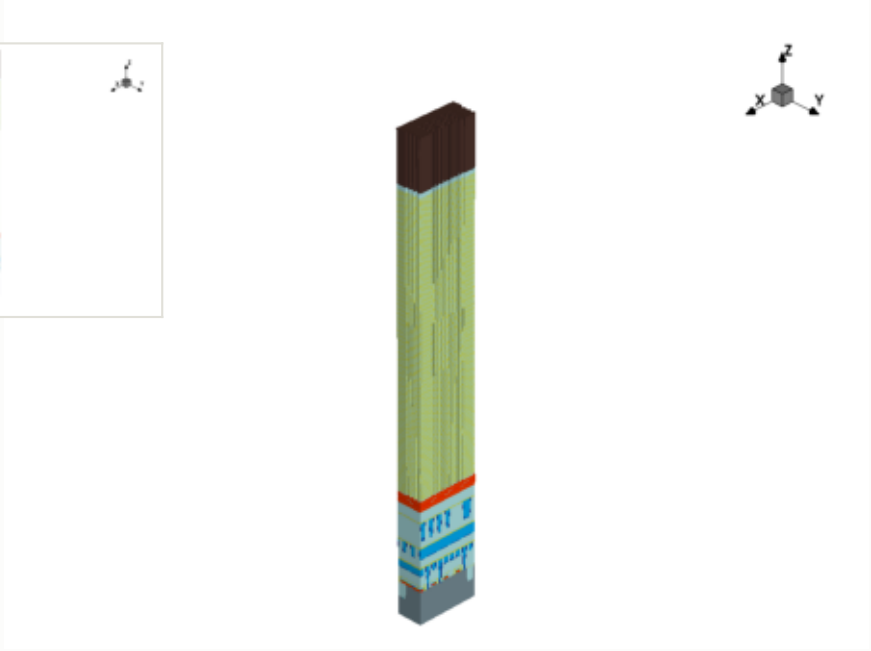

x cut at 0.000 µm

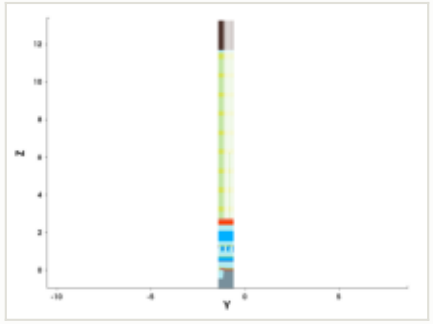

y cut at -1.035 µm

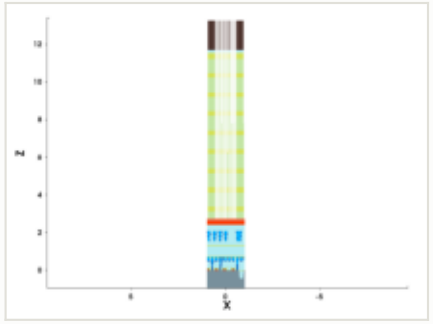

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

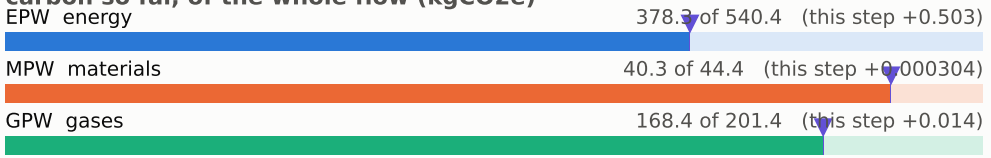


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

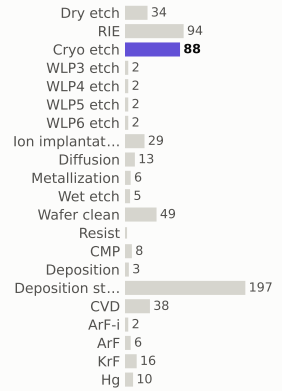

materials deposited (g)

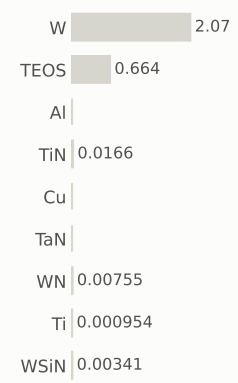

gases emitted (g)



Step #7284.4898: Cryo_etch


etch_noop · Cryo_etch

0.517	587.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




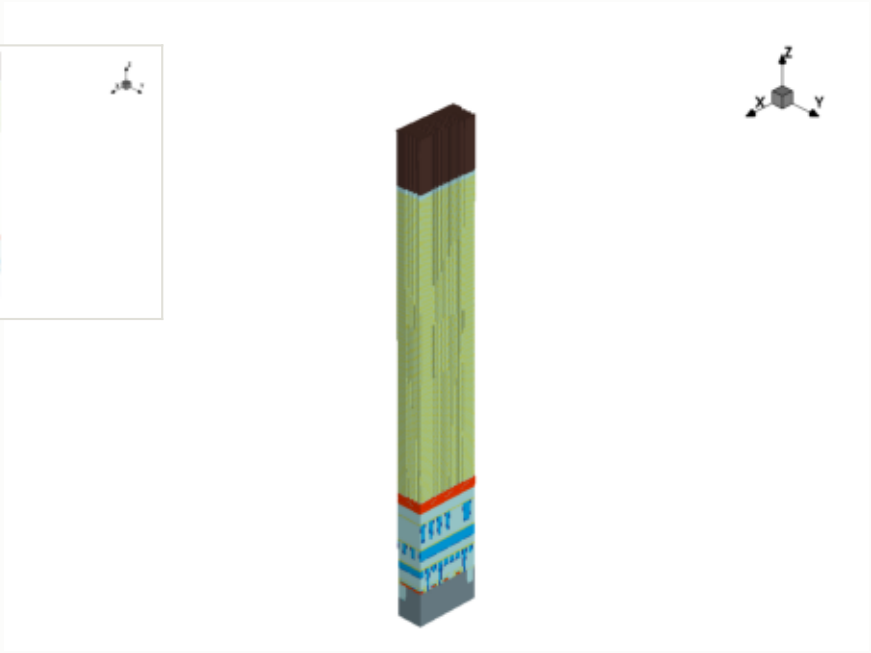

x cut at 0.000 µm

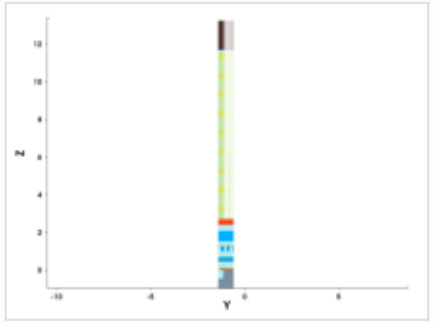

y cut at -1.035 µm

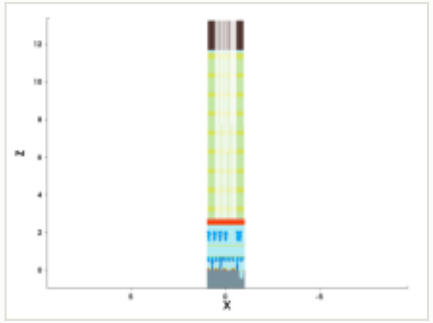

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

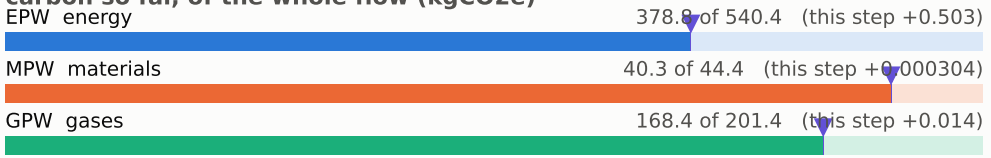


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

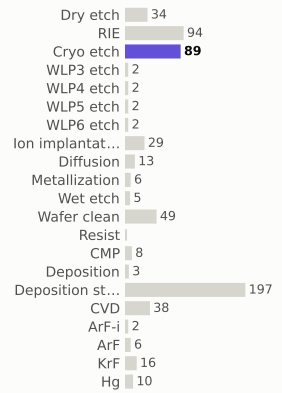

materials deposited (g)

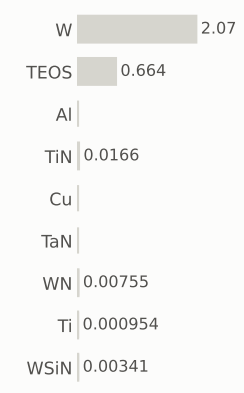

gases emitted (g)



Step #7284.5408: Cryo_etch


etch_noop · Cryo_etch

0.517	588.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




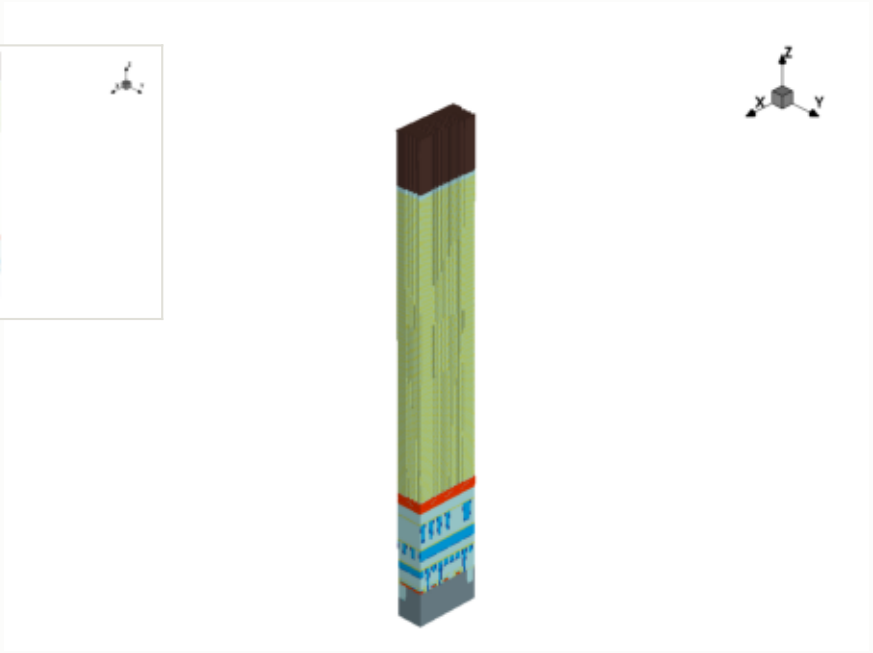

x cut at 0.000 µm

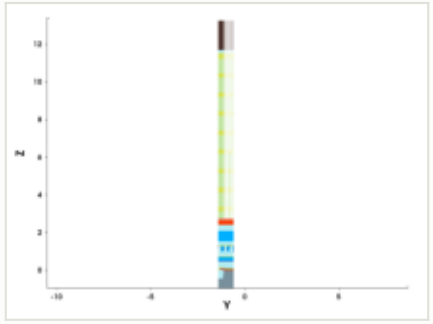

y cut at -1.035 µm

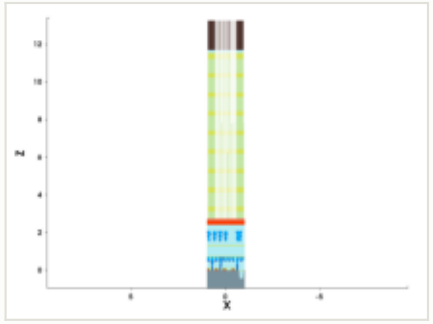

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

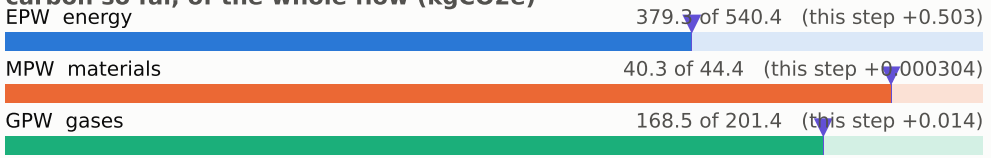


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

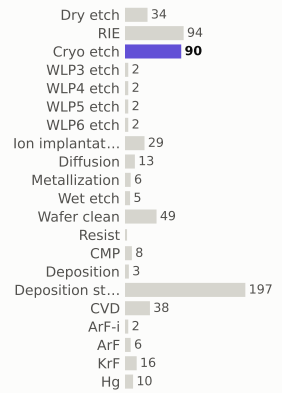

materials deposited (g)

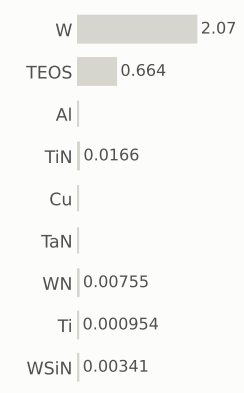

gases emitted (g)



Step #7284.5918: Cryo_etch


etch_noop · Cryo_etch

0.517	588.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




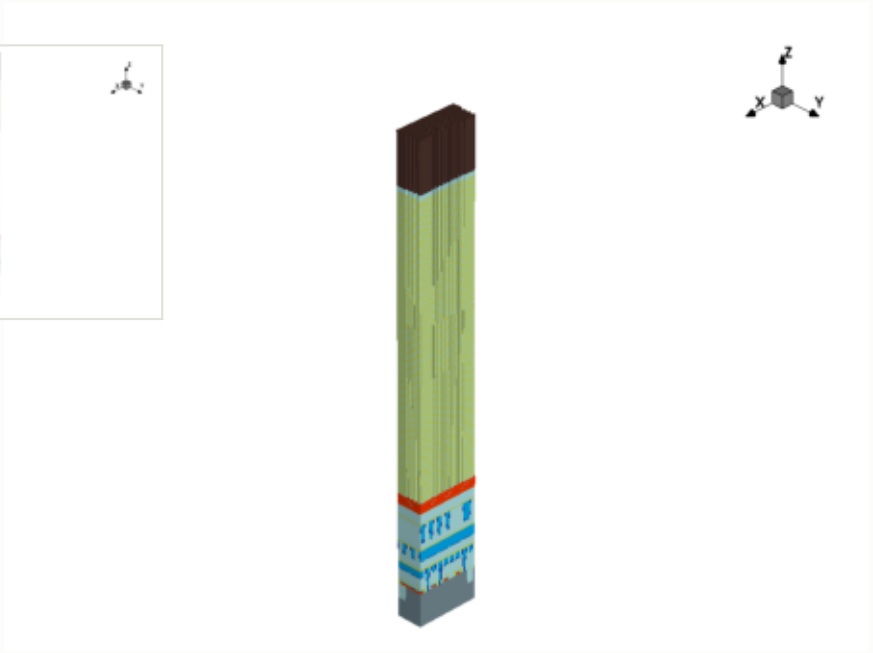

x cut at 0.000 µm

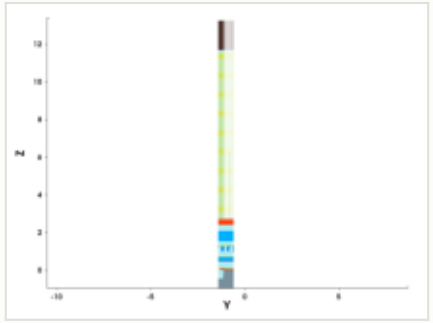

y cut at -1.035 µm

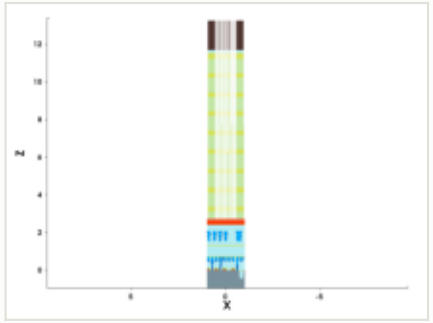

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

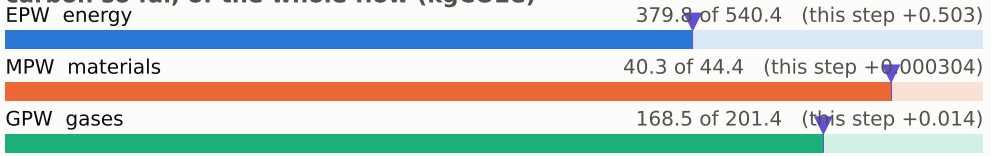


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

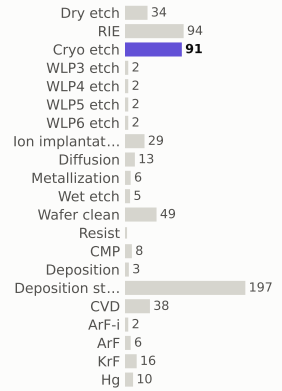

materials deposited (g)

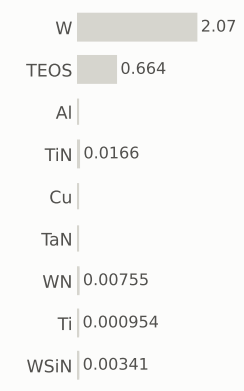

gases emitted (g)



Step #7284.6429: Cryo_etch


etch_noop · Cryo_etch

0.517	589.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




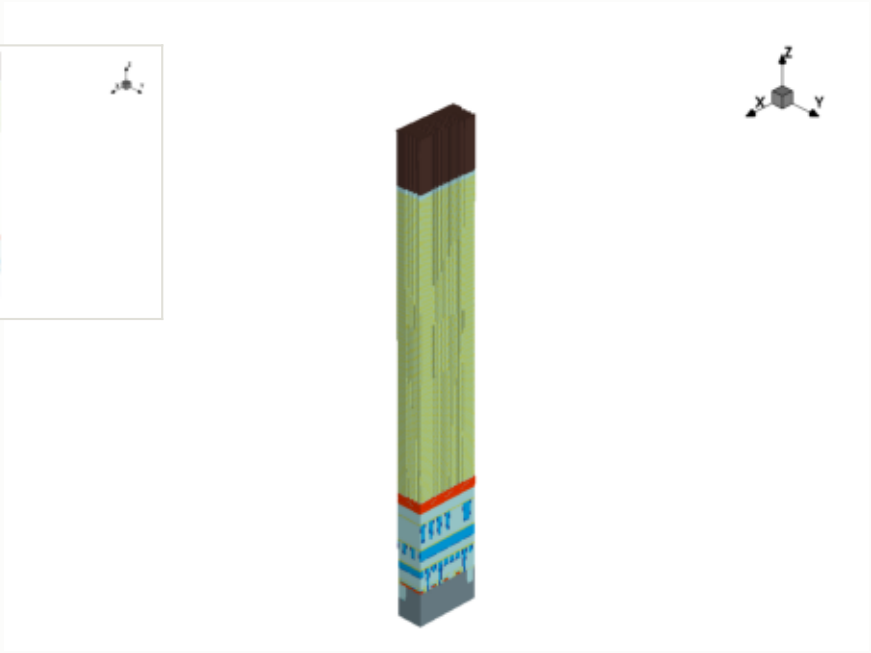

x cut at 0.000 µm

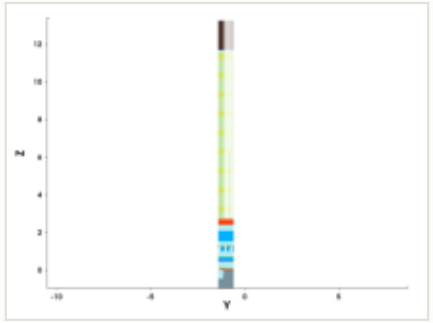

y cut at -1.035 µm

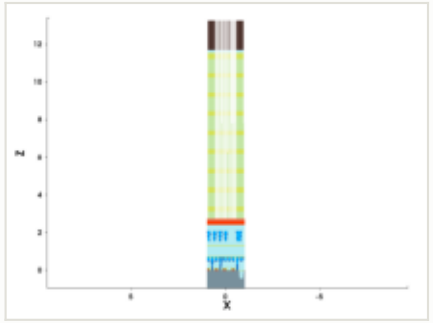

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

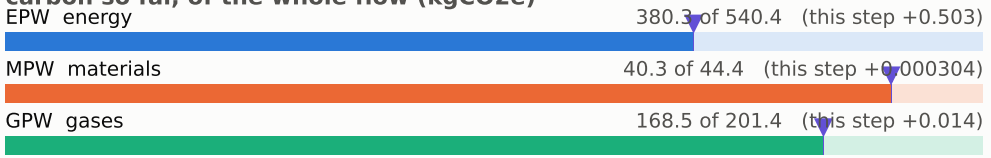


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

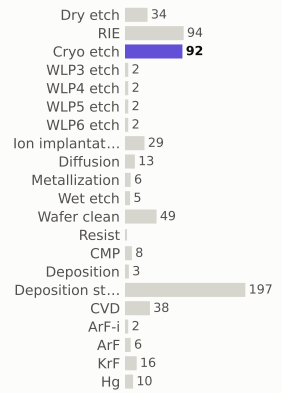

materials deposited (g)

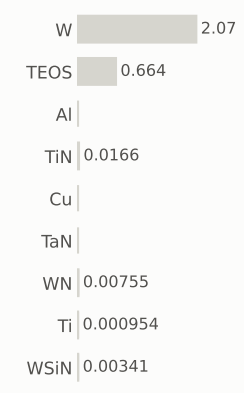

gases emitted (g)



Step #7284.6939: Cryo_etch


etch_noop · Cryo_etch

0.517	589.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




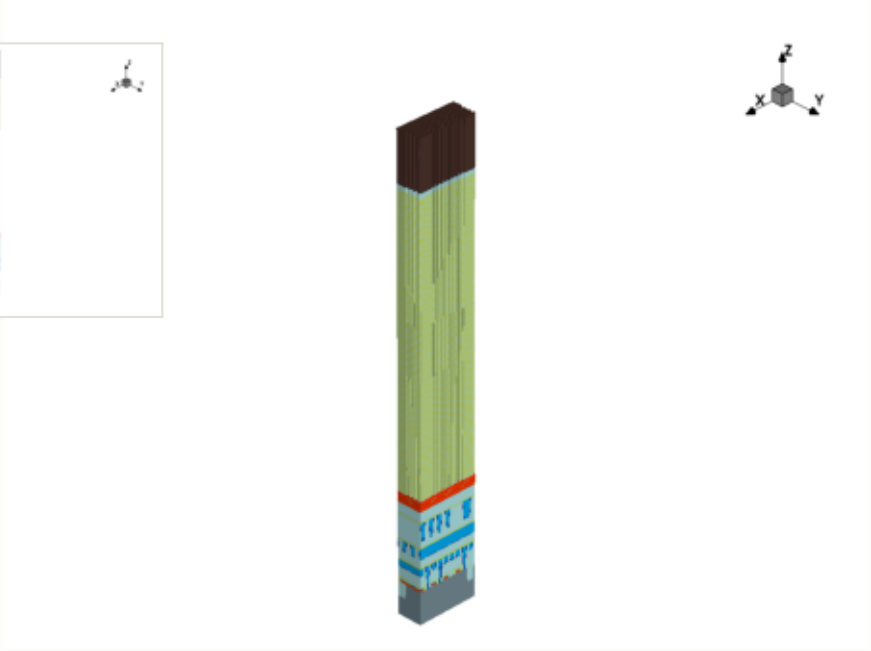

x cut at 0.000 µm

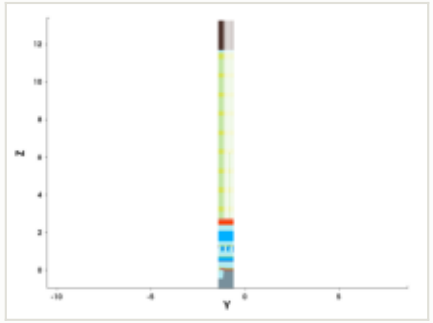

y cut at -1.035 µm

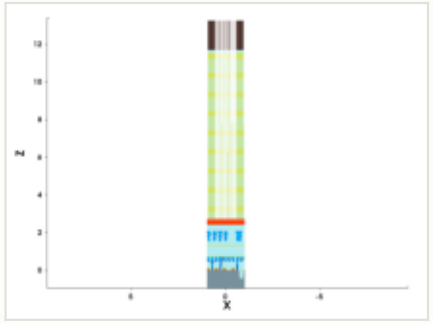

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

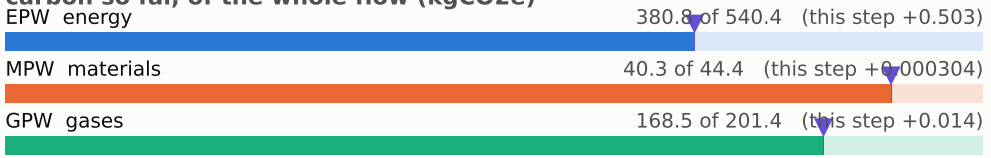


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

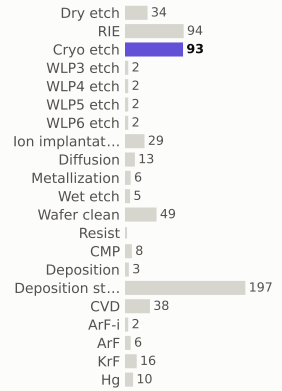

materials deposited (g)

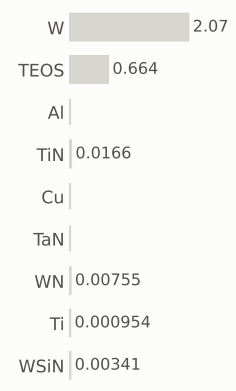

gases emitted (g)



Step #7284.7449: Cryo_etch


etch_noop · Cryo_etch

0.517	590.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




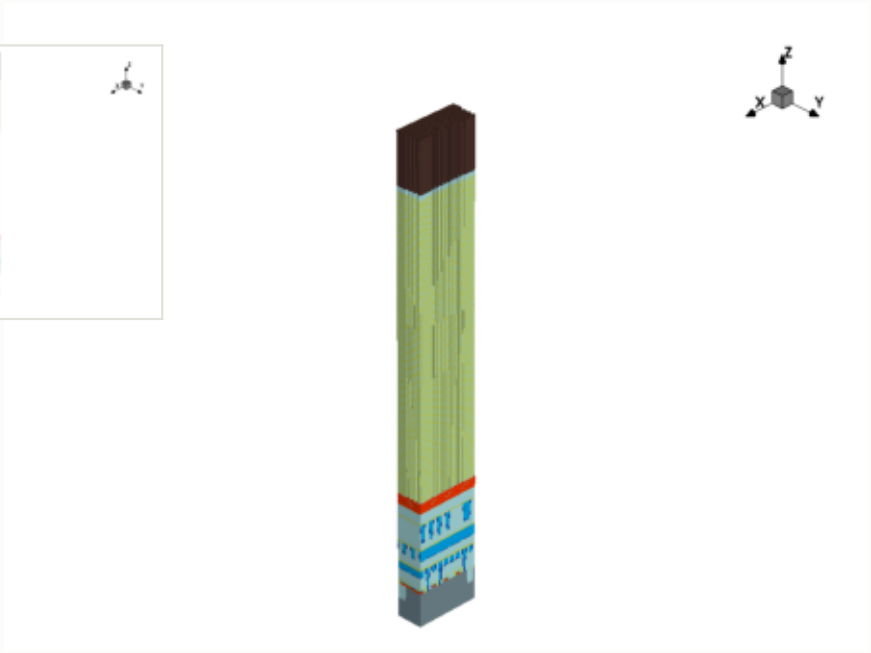

x cut at 0.000 µm

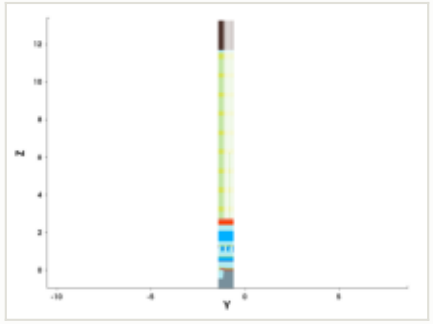

y cut at -1.035 µm

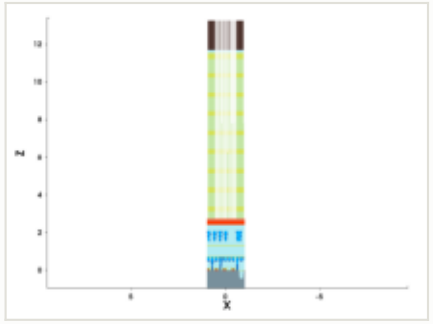

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

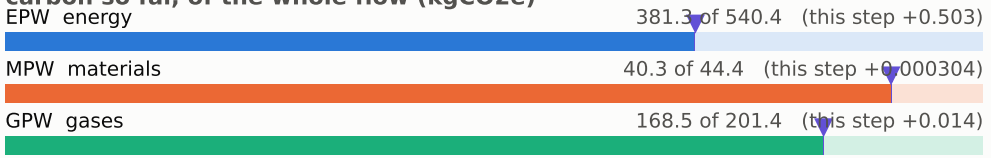


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

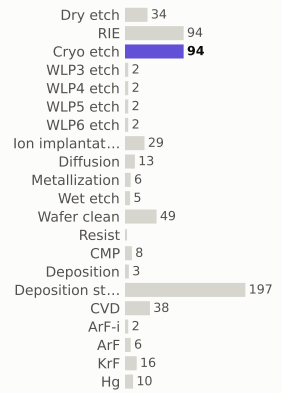

materials deposited (g)

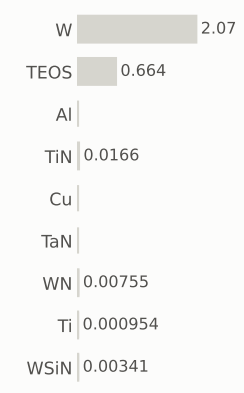

gases emitted (g)



Step #7284.7959: Cryo_etch


etch_noop · Cryo_etch

0.517	590.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




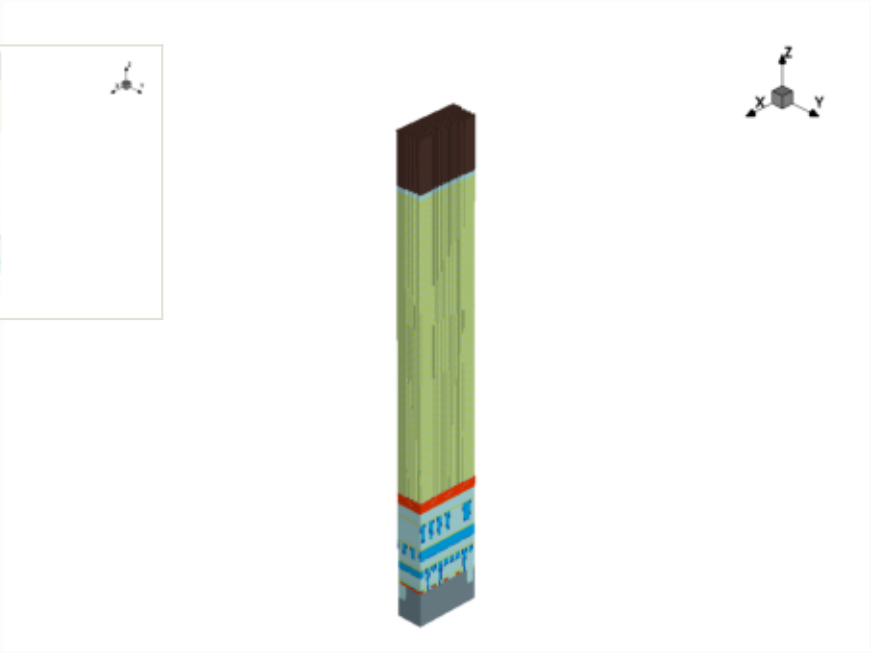

x cut at 0.000 µm

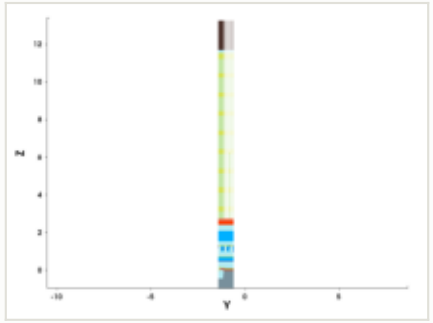

y cut at -1.035 µm

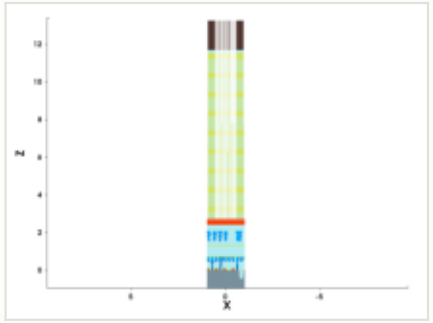

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

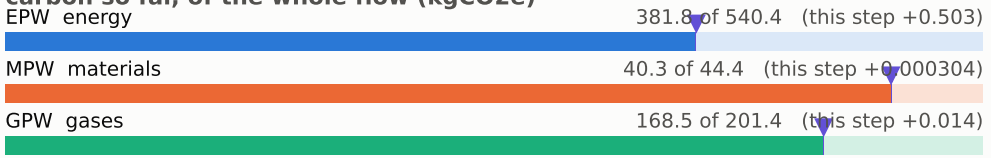


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

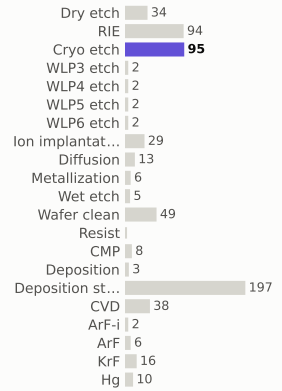

materials deposited (g)

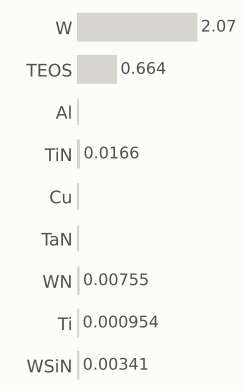

gases emitted (g)



Step #7284.8469: Cryo_etch


etch_noop · Cryo_etch

0.517	591.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



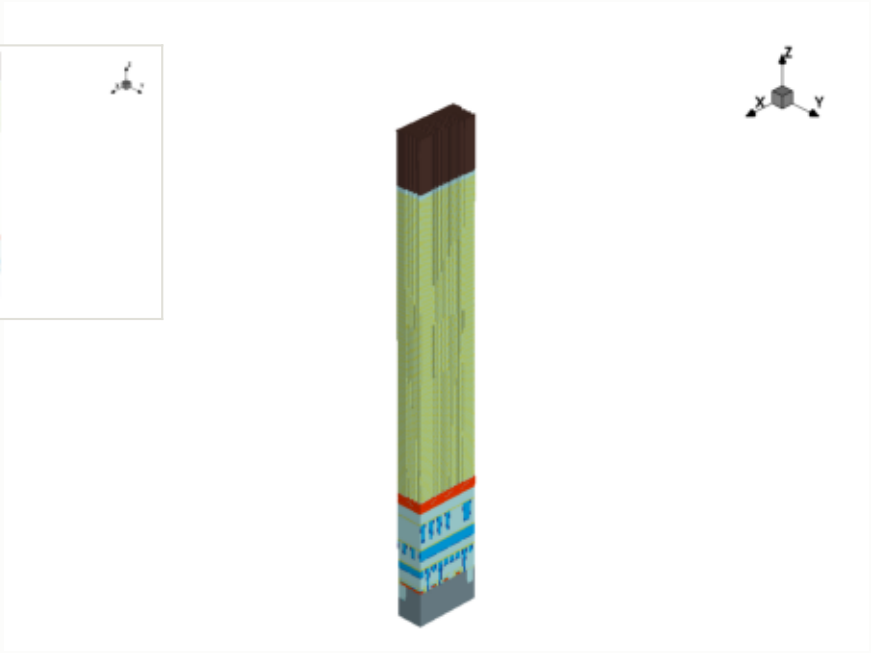


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

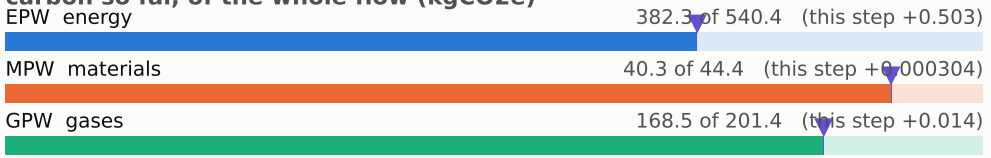


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

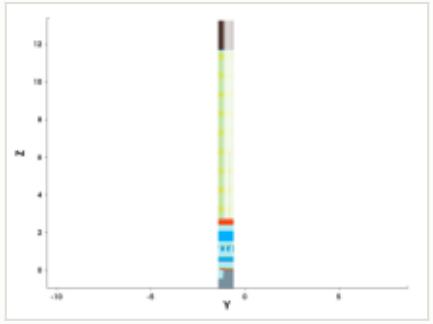


y cut at -1.035 µm

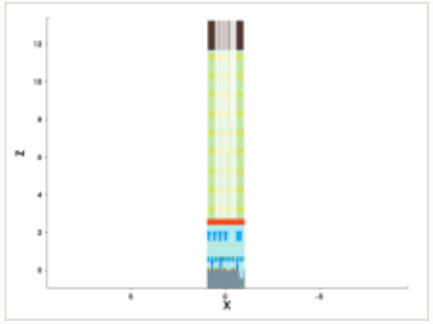


mask for this step

no mask for this step


steps by process area

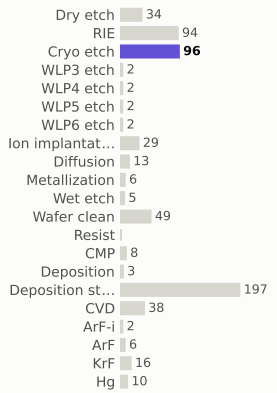

materials deposited (g)

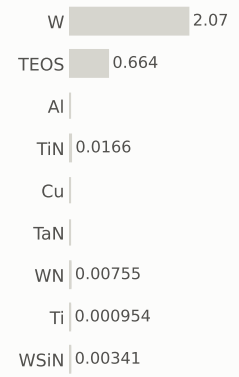

gases emitted (g)



Step #7284.898: Cryo_etch


etch_noop · Cryo_etch

0.517	591.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




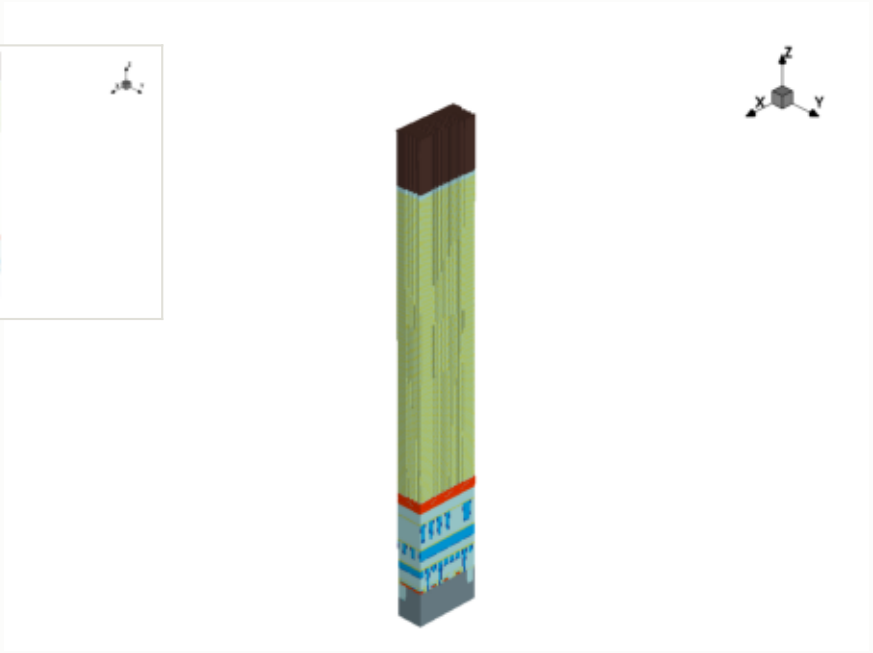

x cut at 0.000 µm

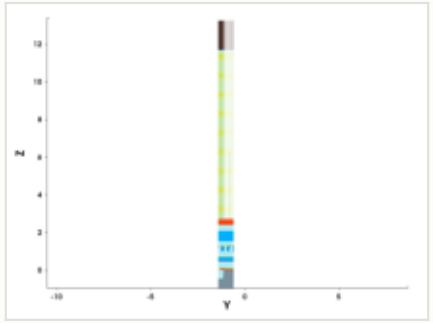

y cut at -1.035 µm

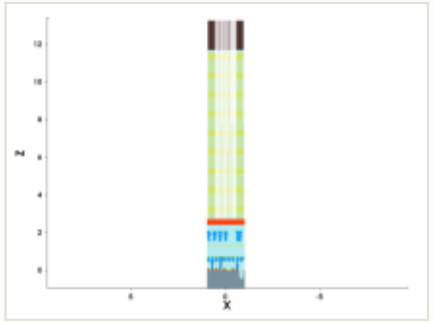

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

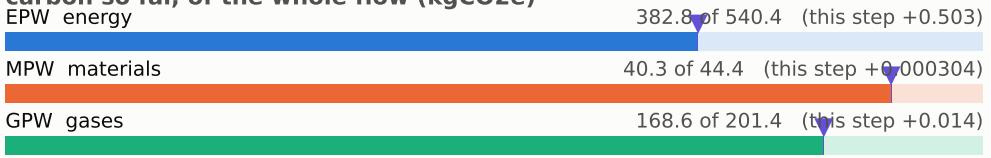


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

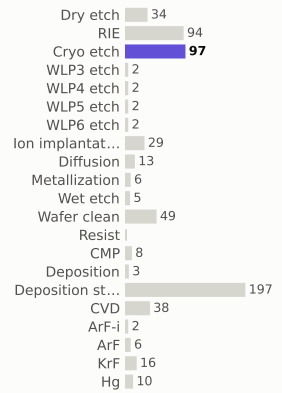

materials deposited (g)

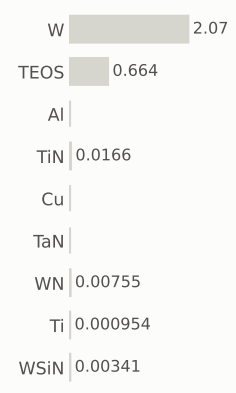

gases emitted (g)



Step #7284.949: Cryo_etch


etch_noop · Cryo_etch

0.517	592.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




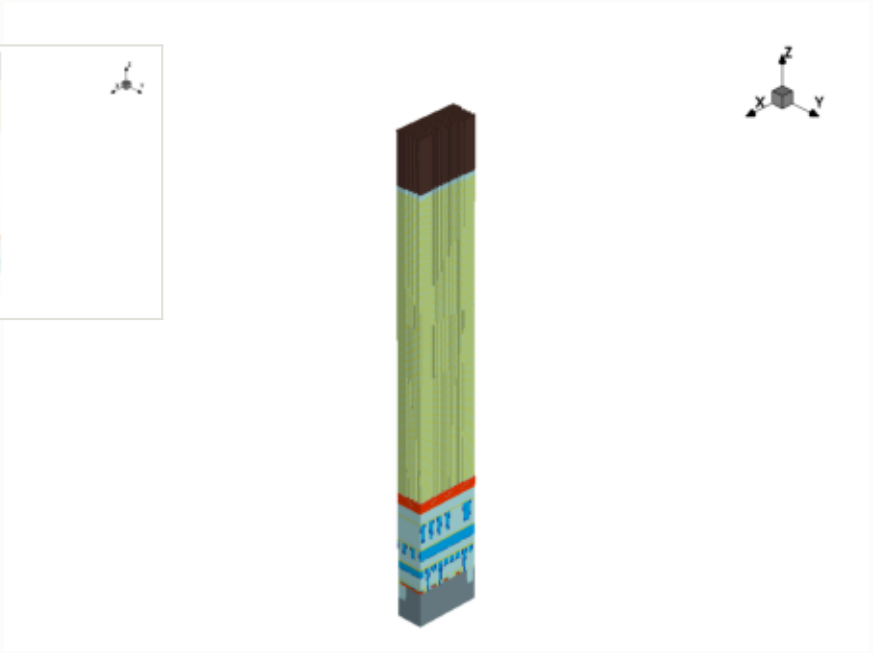

x cut at 0.000 µm

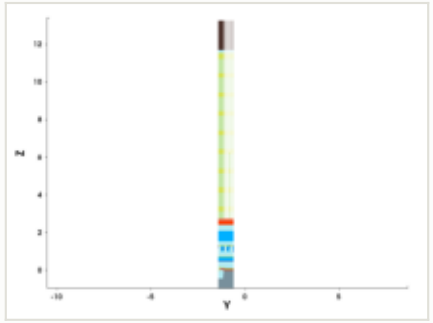

y cut at -1.035 µm

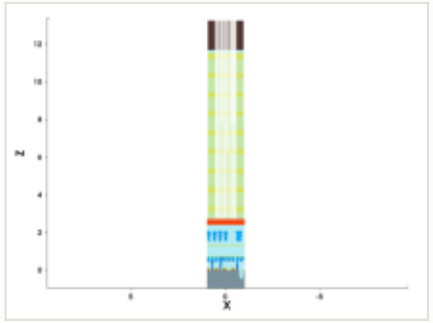

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

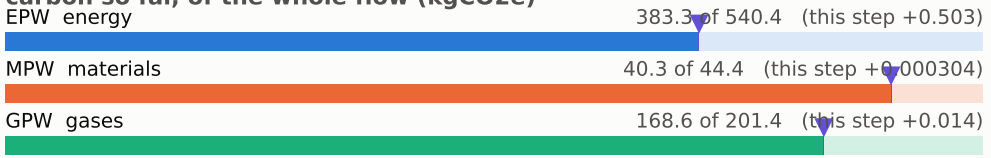


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

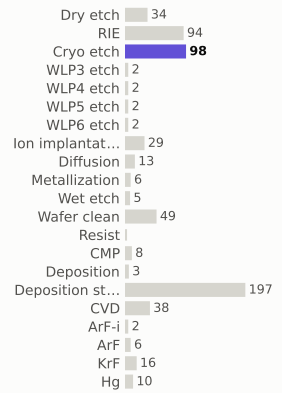

materials deposited (g)

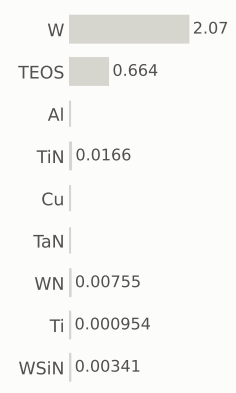

gases emitted (g)



Step #7285: Cryo_etch


etch_noop · Cryo_etch

0.517	592.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




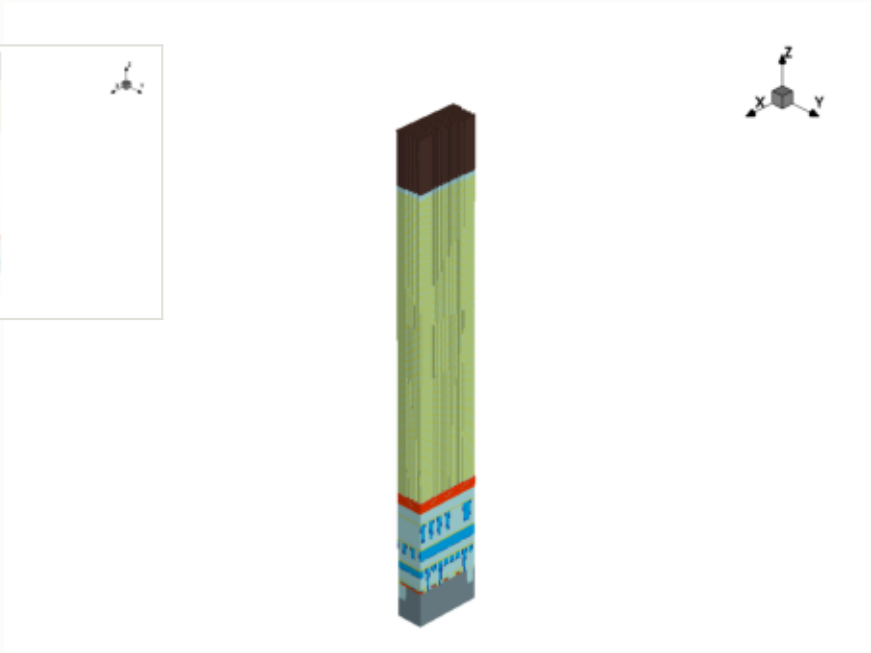

x cut at 0.000 µm

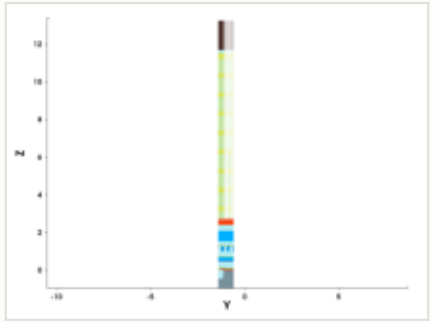

y cut at -1.035 µm

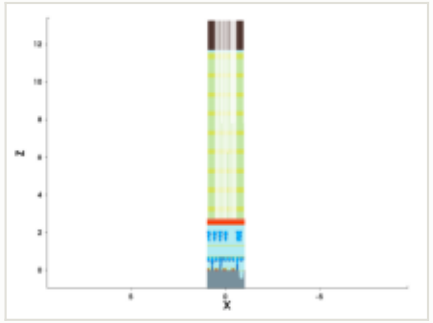

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

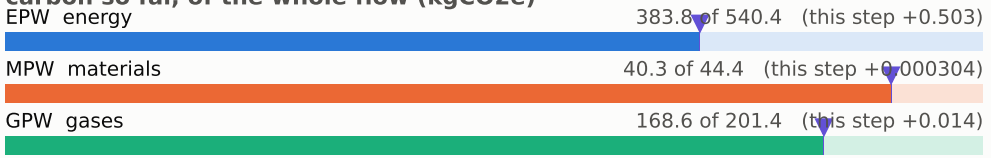


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

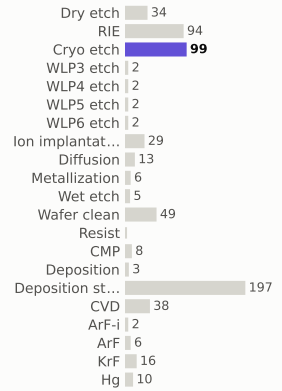

materials deposited (g)

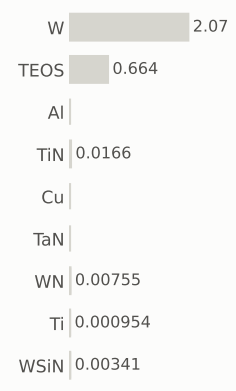

gases emitted (g)



Step #7285.051: Cryo_etch


etch_noop · Cryo_etch

0.517	593.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




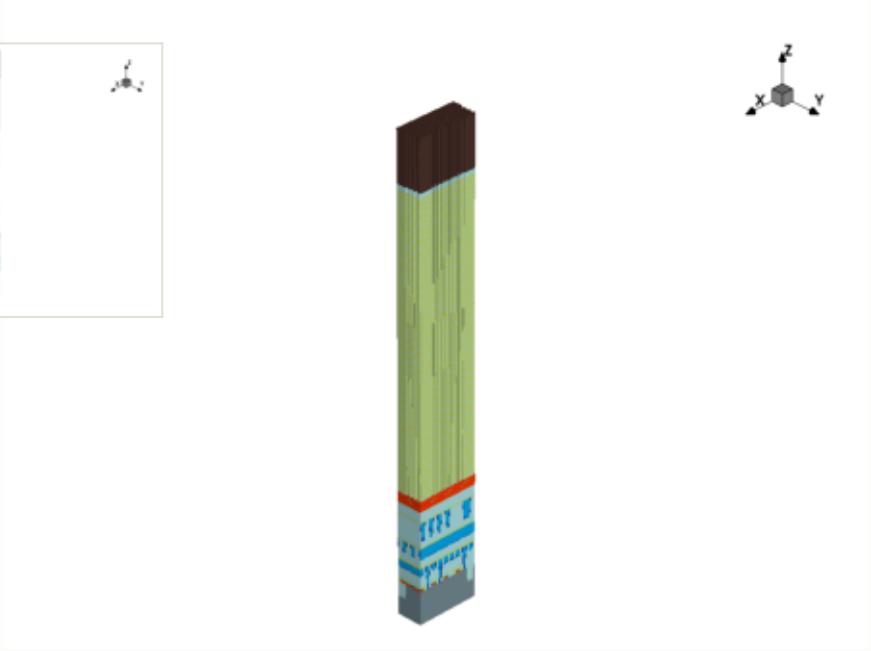

x cut at 0.000 µm

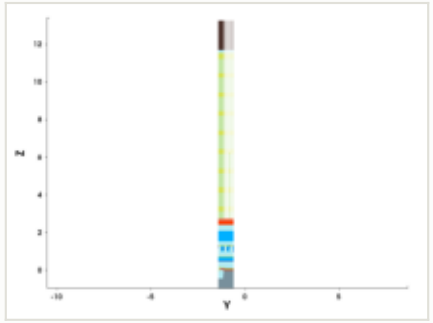

y cut at -1.035 µm

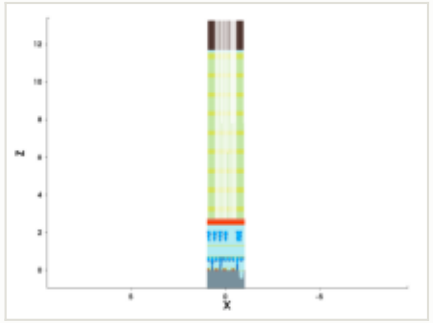

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

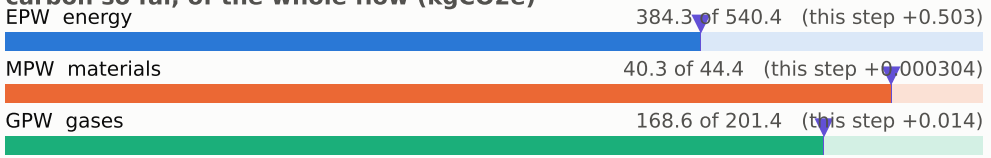


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

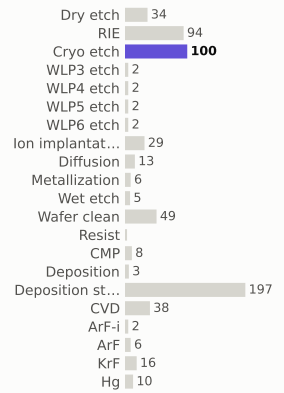

materials deposited (g)

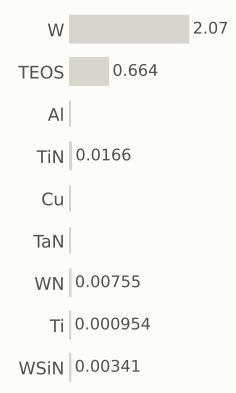

gases emitted (g)



Step #7285.102: Cryo_etch


etch_noop · Cryo_etch

0.517	593.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




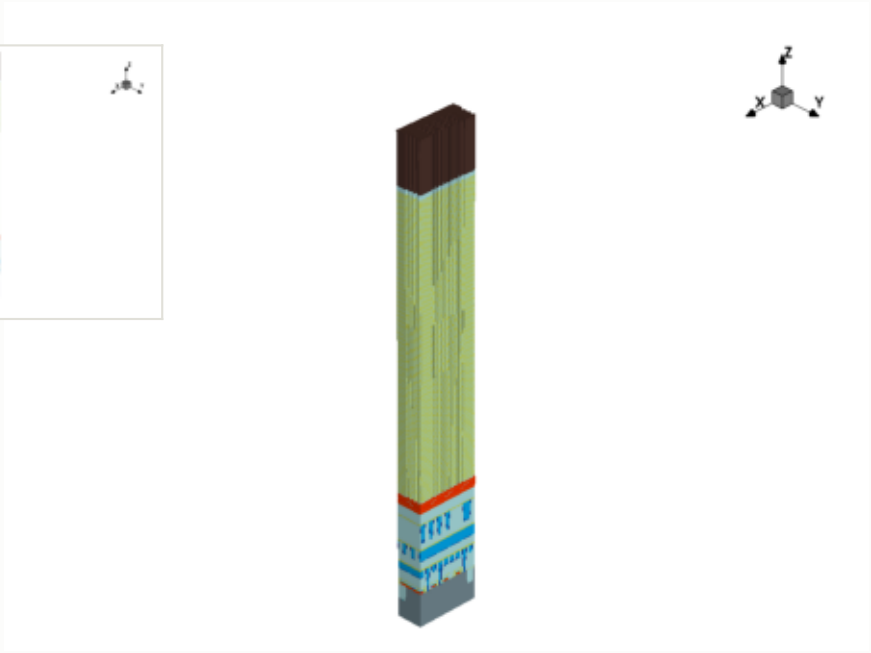

x cut at 0.000 µm

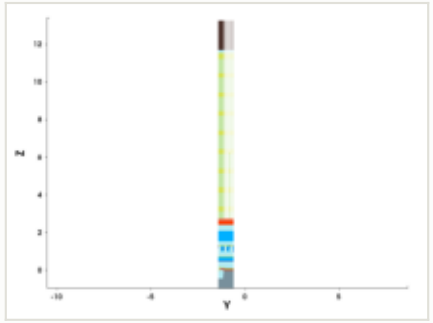

y cut at -1.035 µm

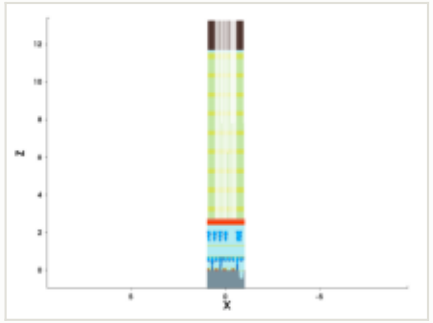

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

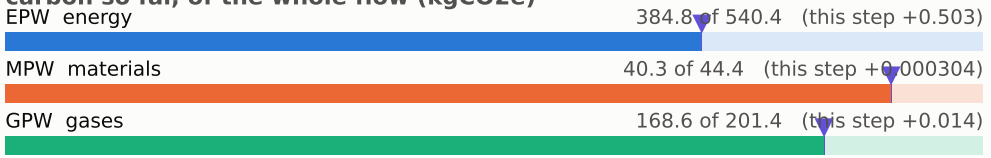


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

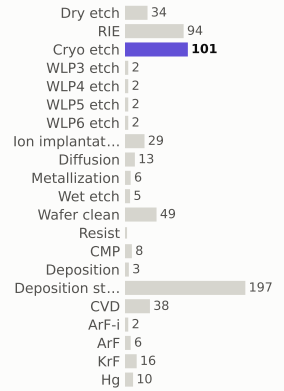

materials deposited (g)

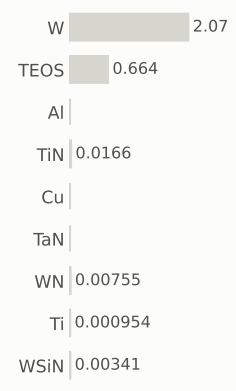

gases emitted (g)



Step #7285.1531: Cryo_etch


etch_noop · Cryo_etch

0.517	594.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




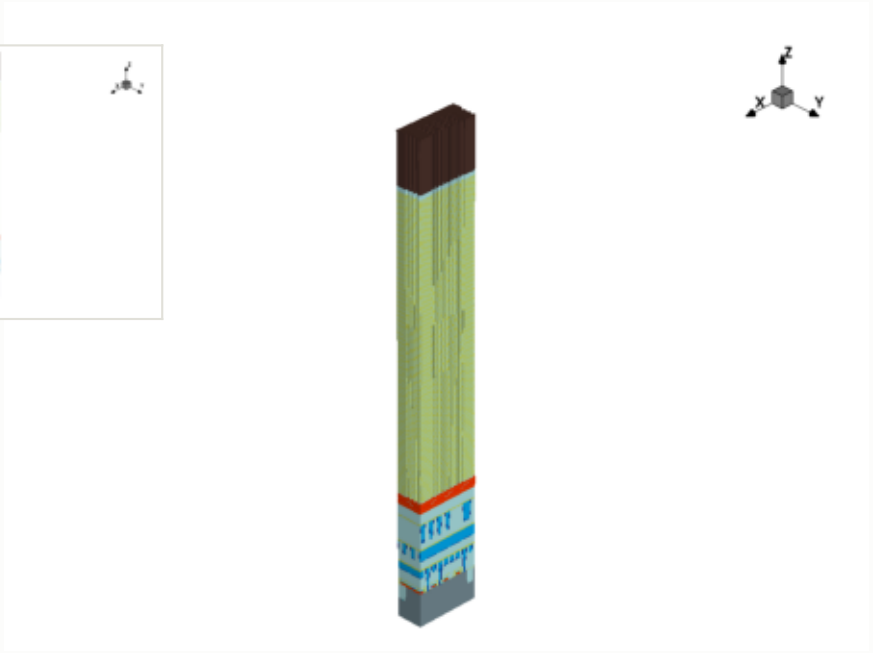

x cut at 0.000 µm

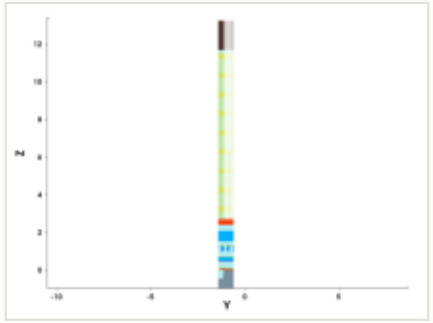

y cut at -1.035 µm

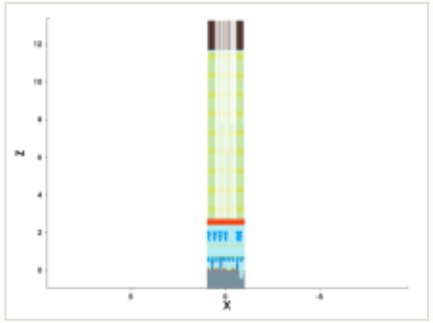

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

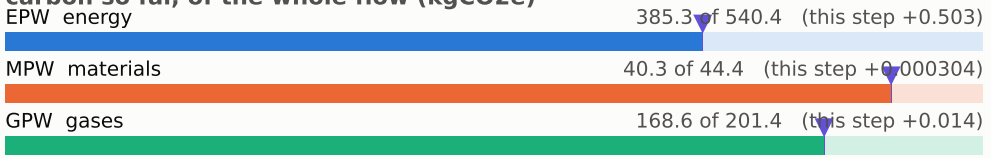


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

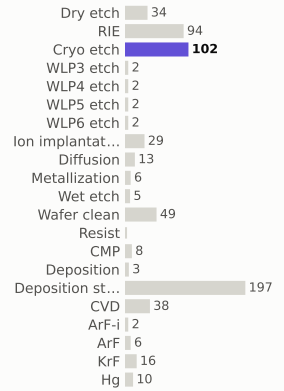

materials deposited (g)

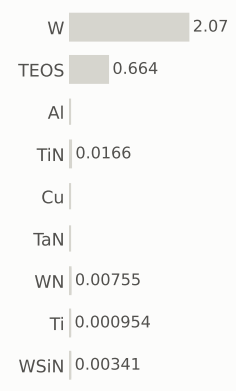

gases emitted (g)



Step #7285.2041: Cryo_etch

etch_noop · Cryo_etch

0.517	594.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

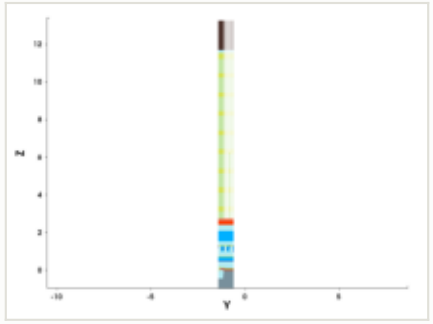

y cut at -1.035 µm

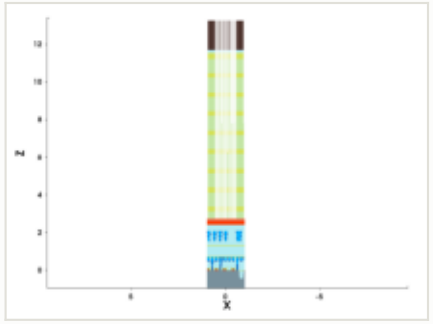

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

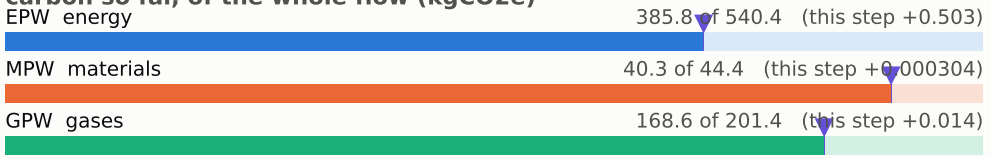


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

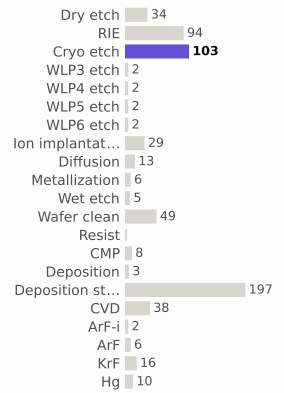

materials deposited (g)

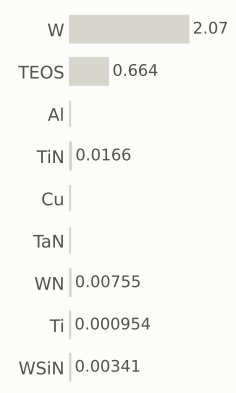

gases emitted (g)



Step #7285.2551: Cryo_etch


etch_noop · Cryo_etch

0.517	595.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




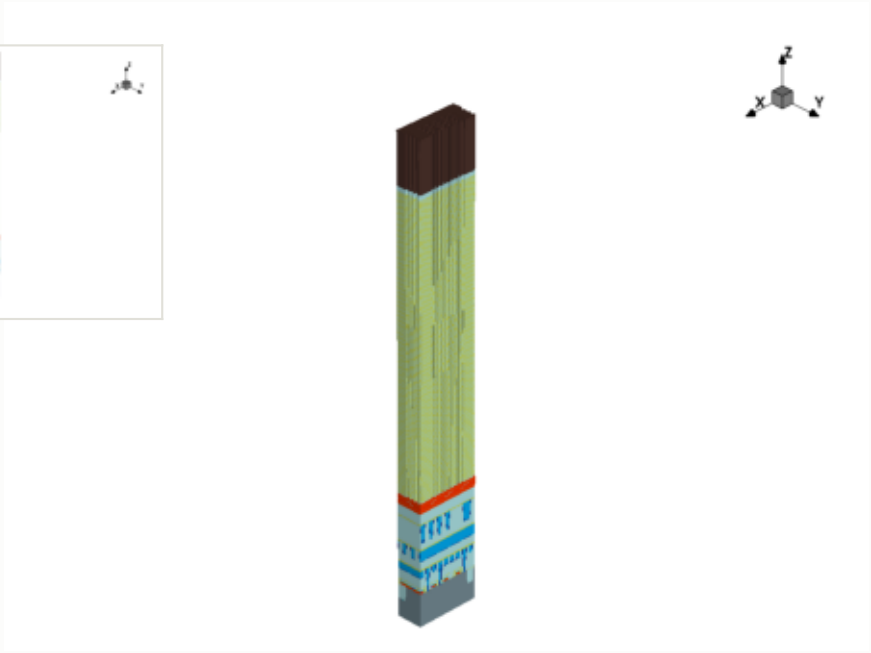

x cut at 0.000 µm

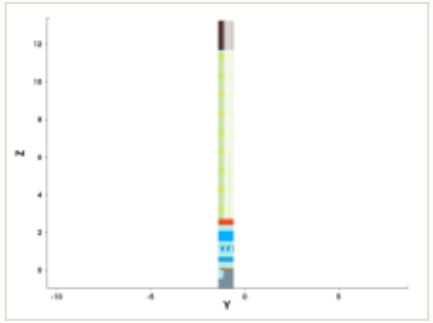

y cut at -1.035 µm

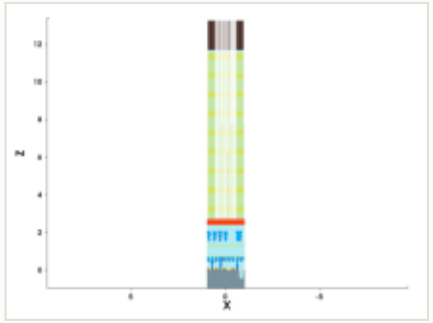

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

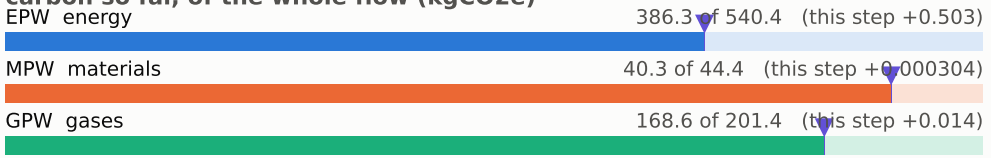


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

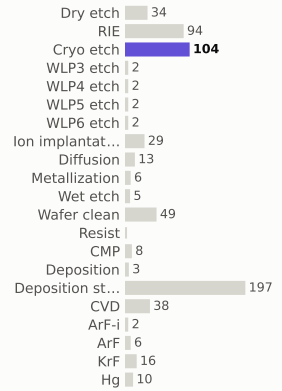

materials deposited (g)

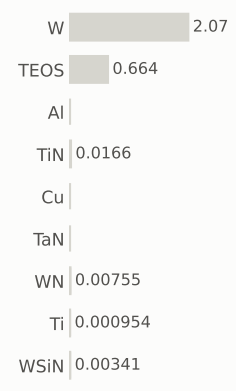

gases emitted (g)



Step #7285.3061: Cryo_etch


etch_noop · Cryo_etch

0.517	595.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




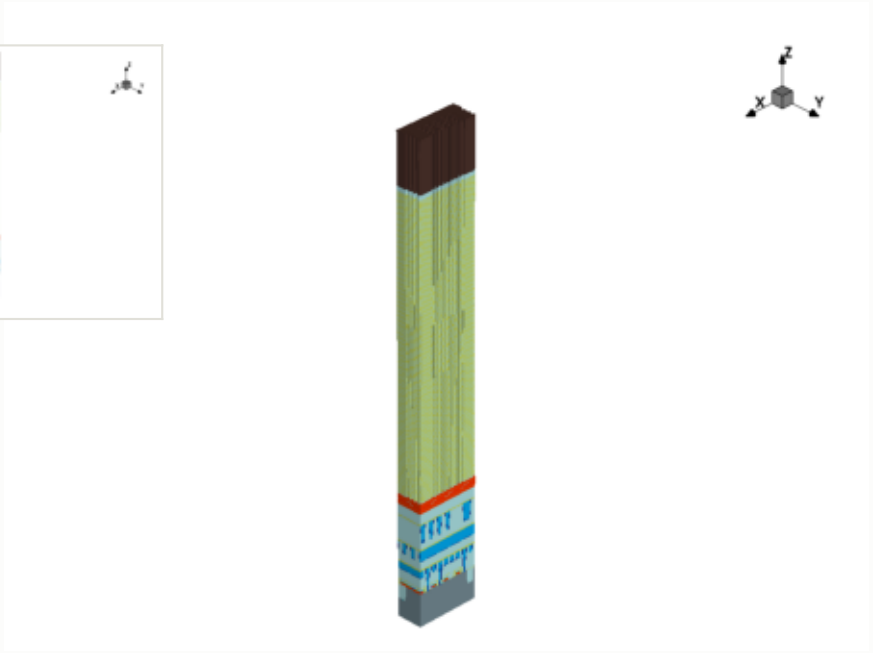

x cut at 0.000 µm

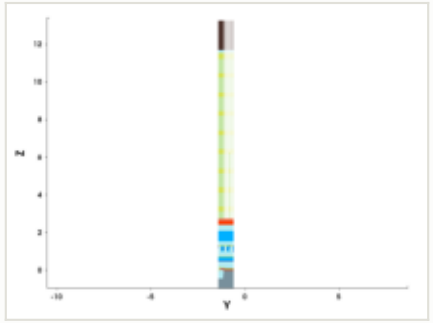

y cut at -1.035 µm

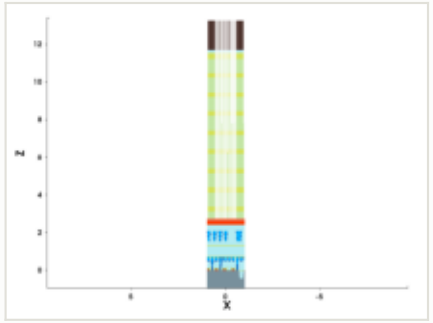

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

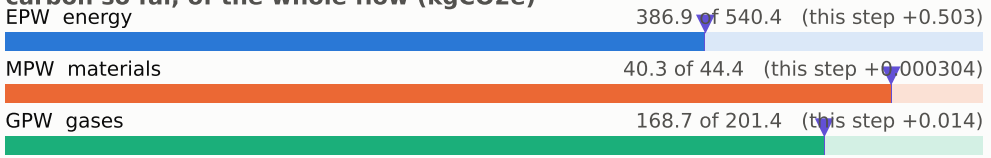


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

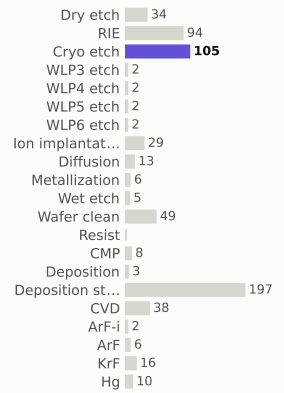

materials deposited (g)

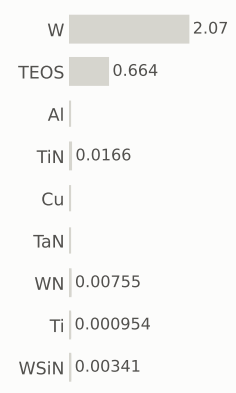

gases emitted (g)



Step #7285.3571: Cryo_etch


etch_noop · Cryo_etch

0.517	596.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




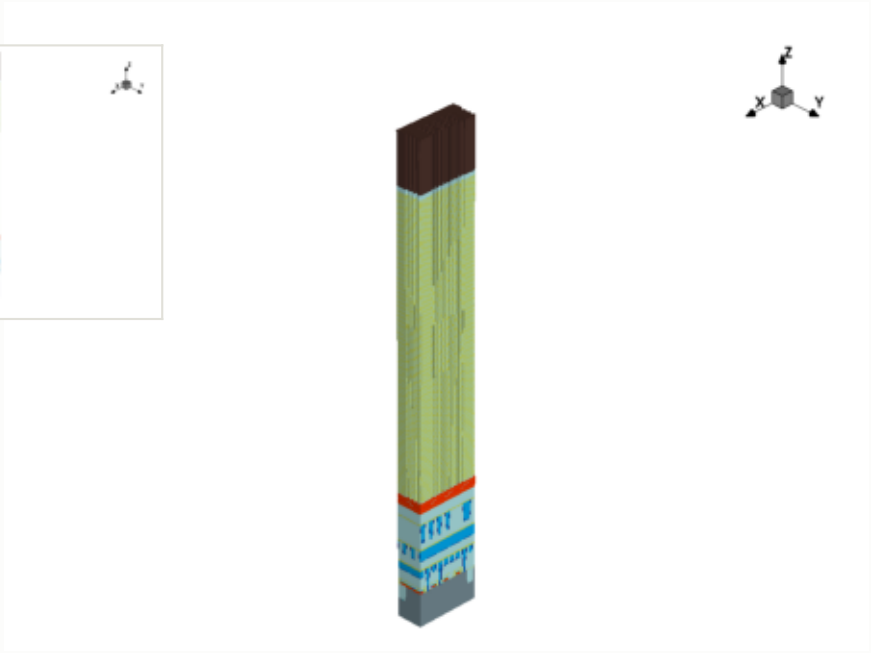

x cut at 0.000 µm

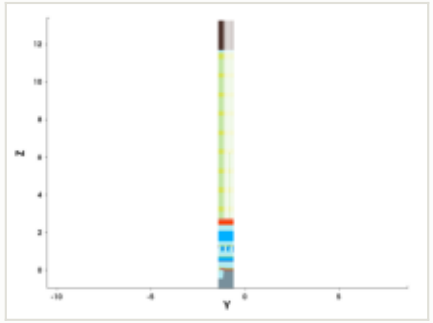

y cut at -1.035 µm

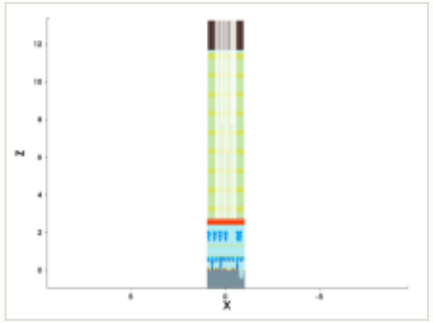

mask for this step

no mask for this step


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead


EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

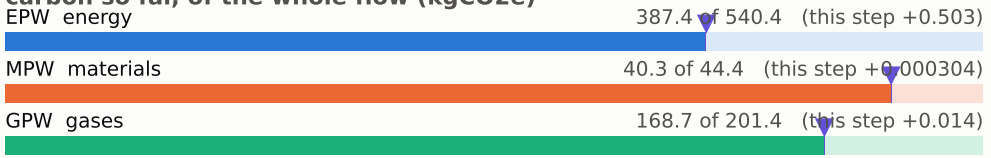


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

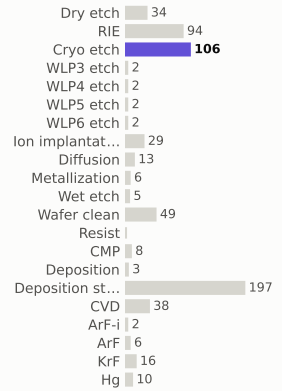

materials deposited (g)

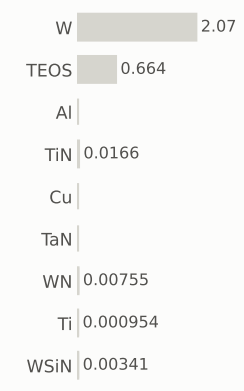

gases emitted (g)



Step #7285.4082: Cryo_etch


etch_noop · Cryo_etch

0.517	596.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




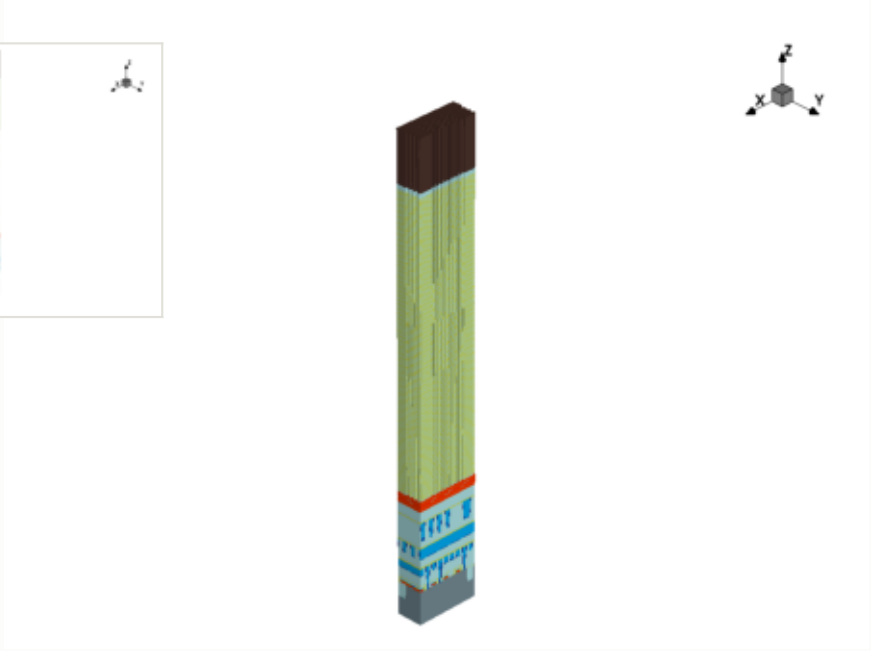

x cut at 0.000 µm

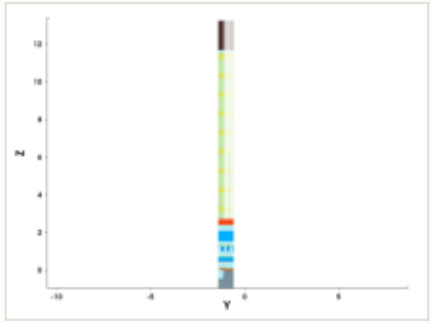

y cut at -1.035 µm

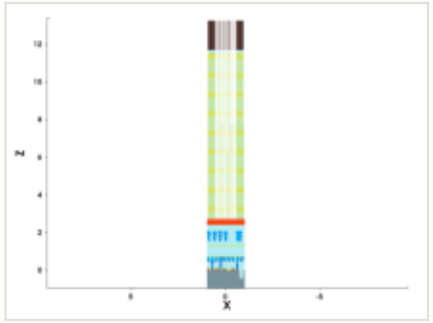

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

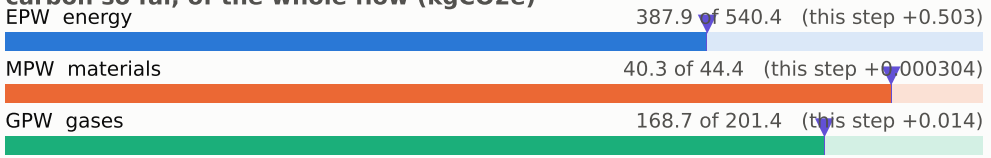


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

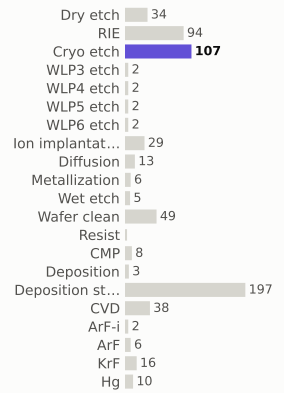

materials deposited (g)

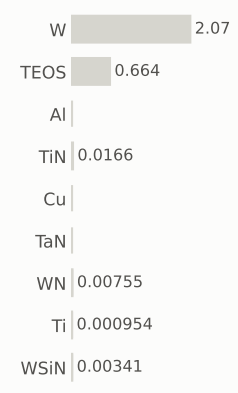

gases emitted (g)



Step #7285.4592: Cryo_etch


etch_noop · Cryo_etch

0.517	597.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



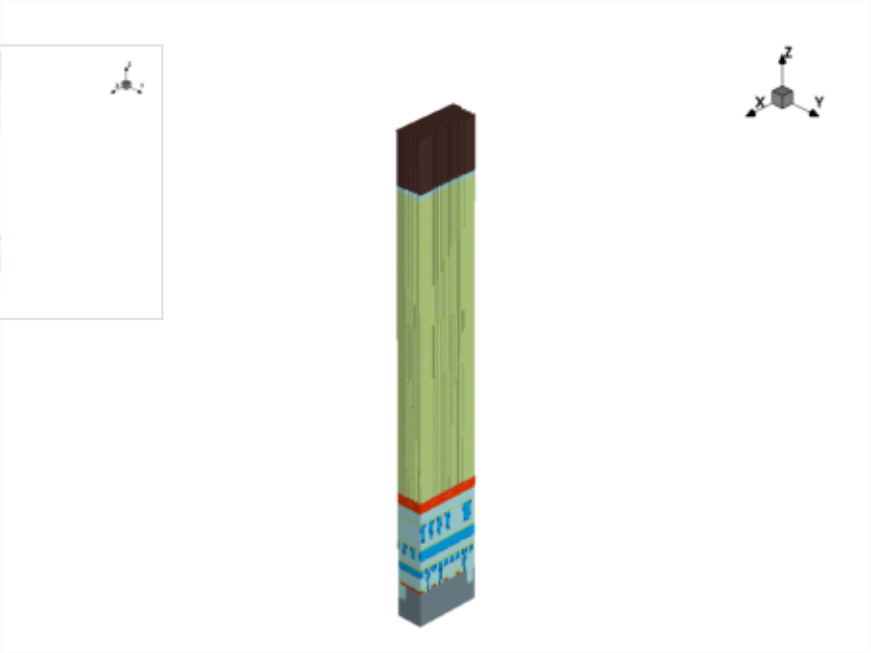


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

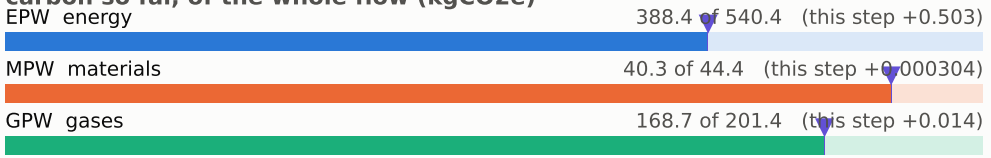


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

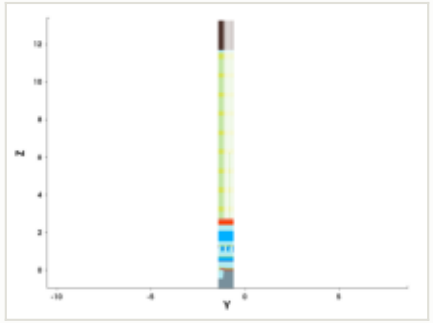


y cut at -1.035 µm

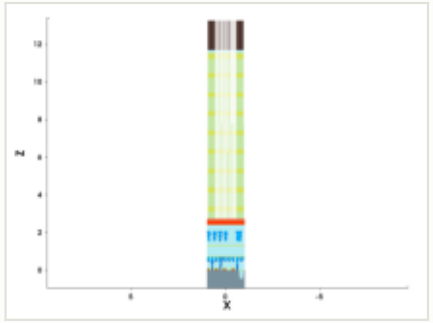


mask for this step

no mask for this step


steps by process area

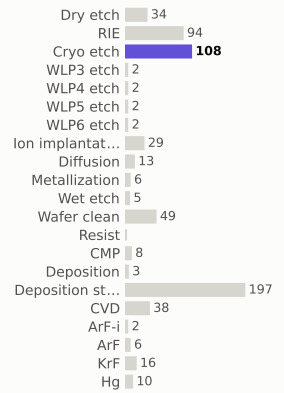

materials deposited (g)

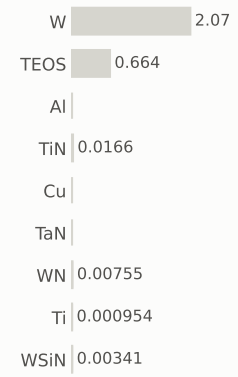

gases emitted (g)



Step #7285.5102: Cryo_etch


etch_noop · Cryo_etch

0.517	597.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




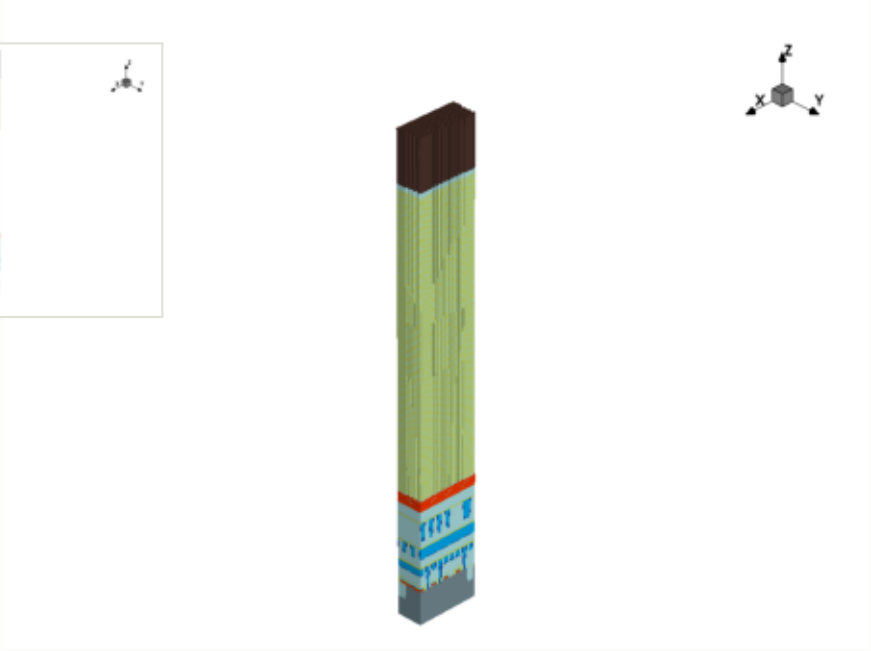

x cut at 0.000 µm

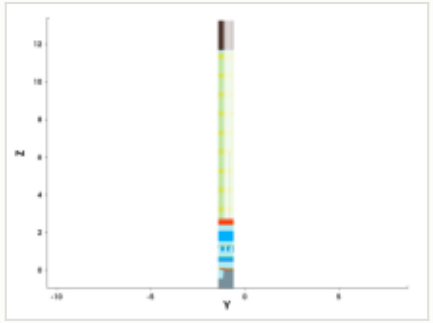

y cut at -1.035 µm

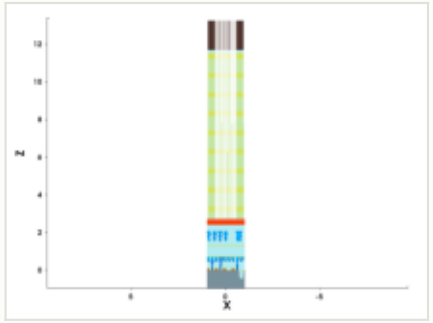

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

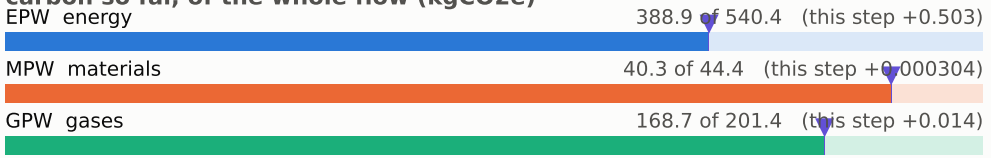


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

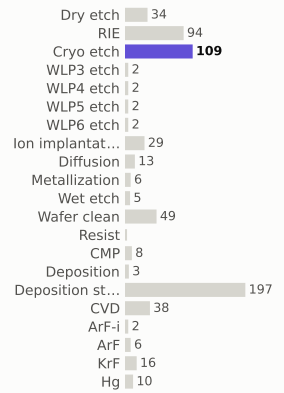

materials deposited (g)

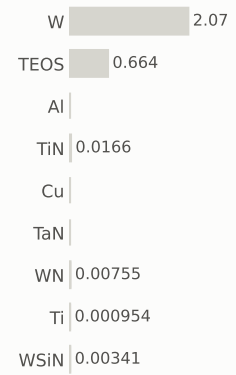

gases emitted (g)



Step #7285.5612: Cryo_etch


etch_noop · Cryo_etch

0.517	598.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



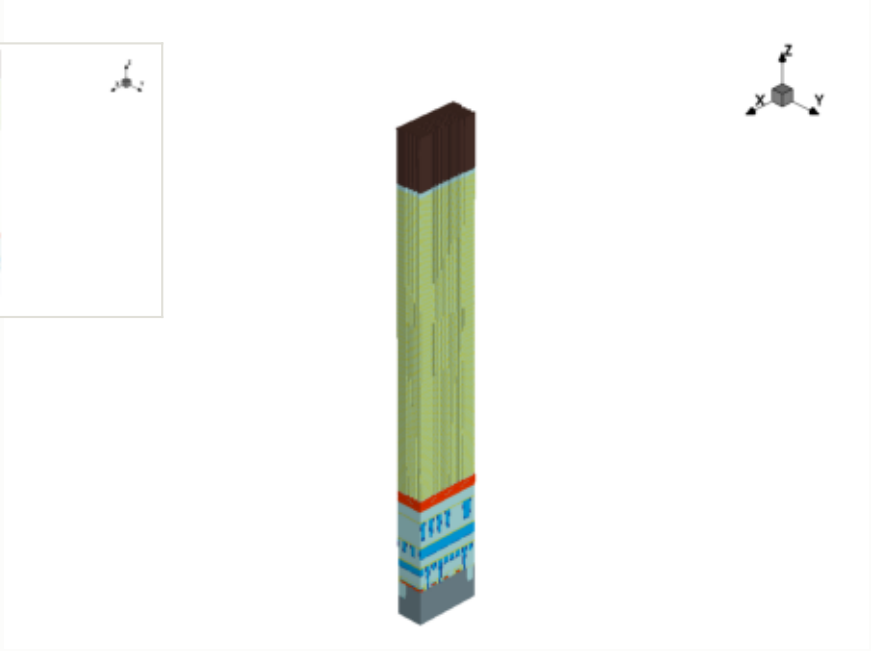


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

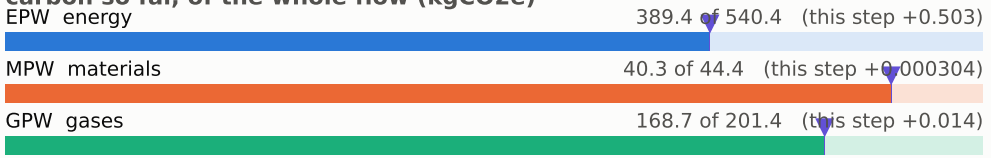


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

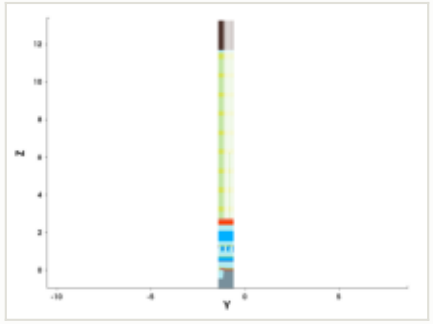


y cut at -1.035 µm

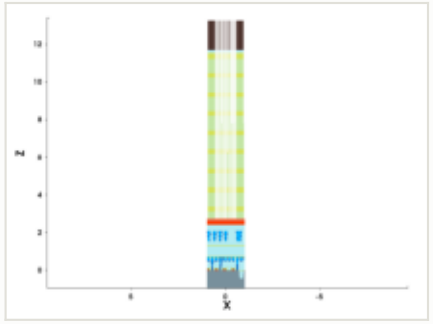


mask for this step

no mask for this step


steps by process area

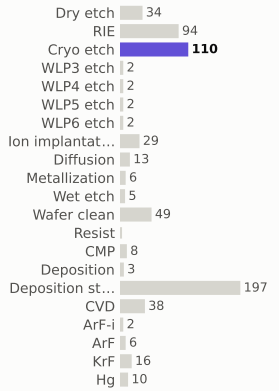

materials deposited (g)

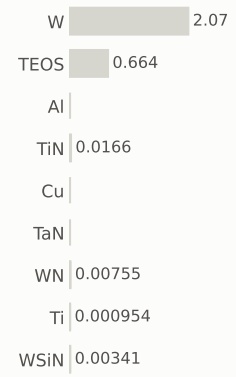

gases emitted (g)



Step #7285.6122: Cryo_etch


etch_noop · Cryo_etch

0.517	598.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



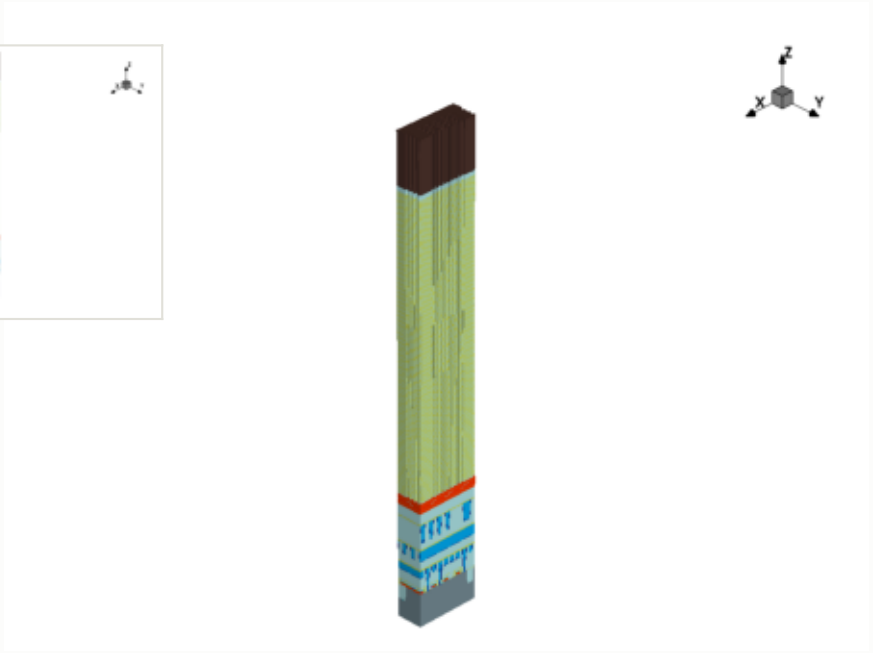


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead


EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

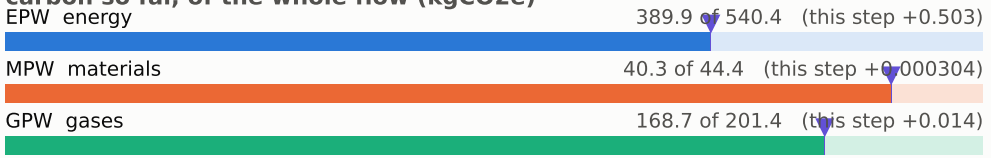


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

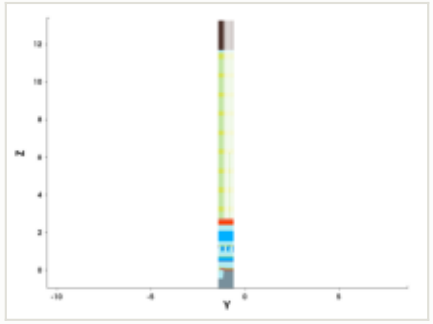


y cut at -1.035 µm

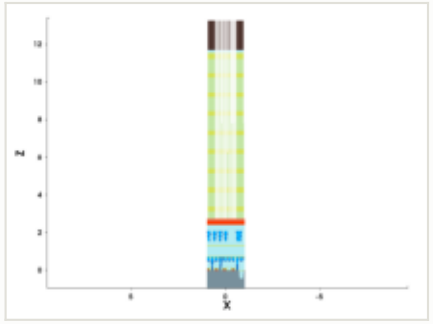


mask for this step

no mask for this step


steps by process area

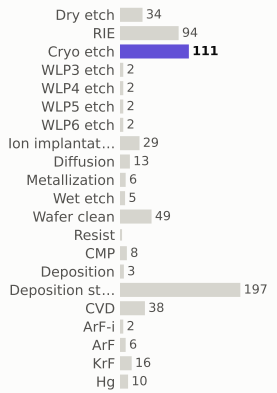

materials deposited (g)

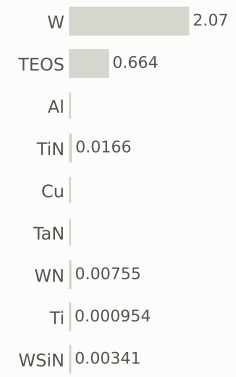

gases emitted (g)



Step #7285.6633: Cryo_etch


etch_noop · Cryo_etch

0.517	599.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



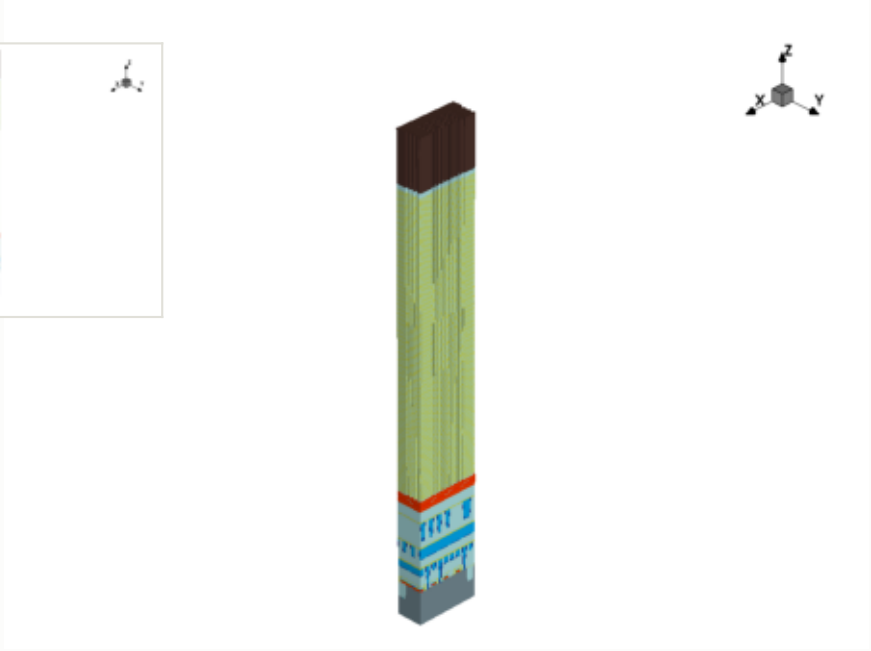


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

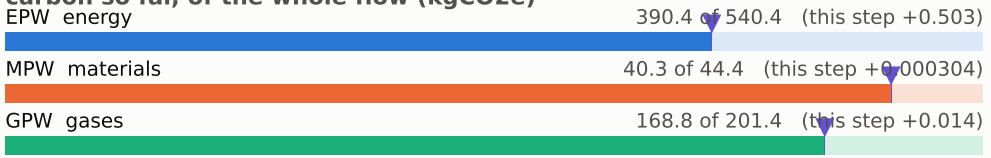


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

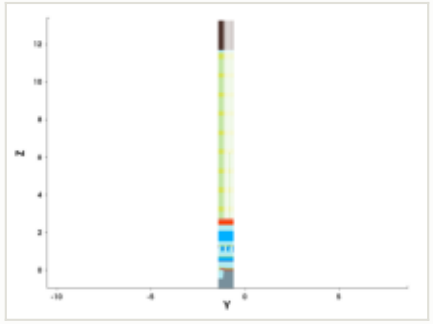


y cut at -1.035 µm

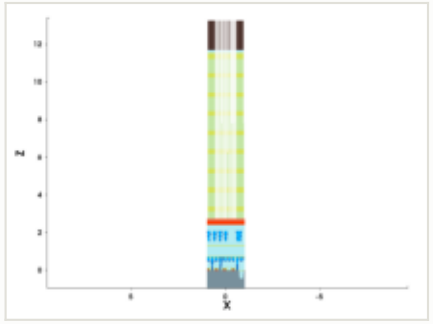


mask for this step

no mask for this step


steps by process area

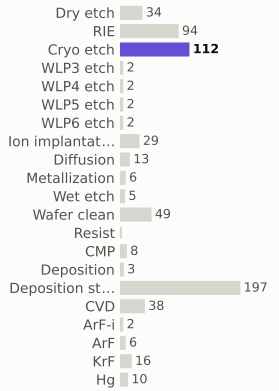

materials deposited (g)

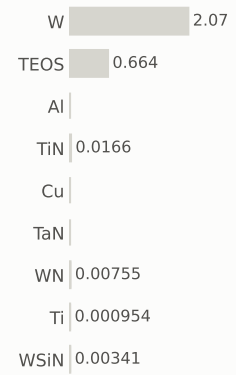

gases emitted (g)

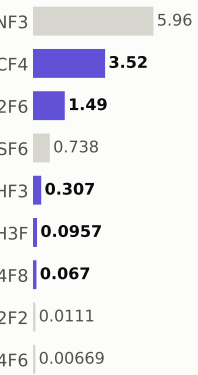

Step #7285.7143: Cryo_etch


etch_noop · Cryo_etch

0.517	599.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




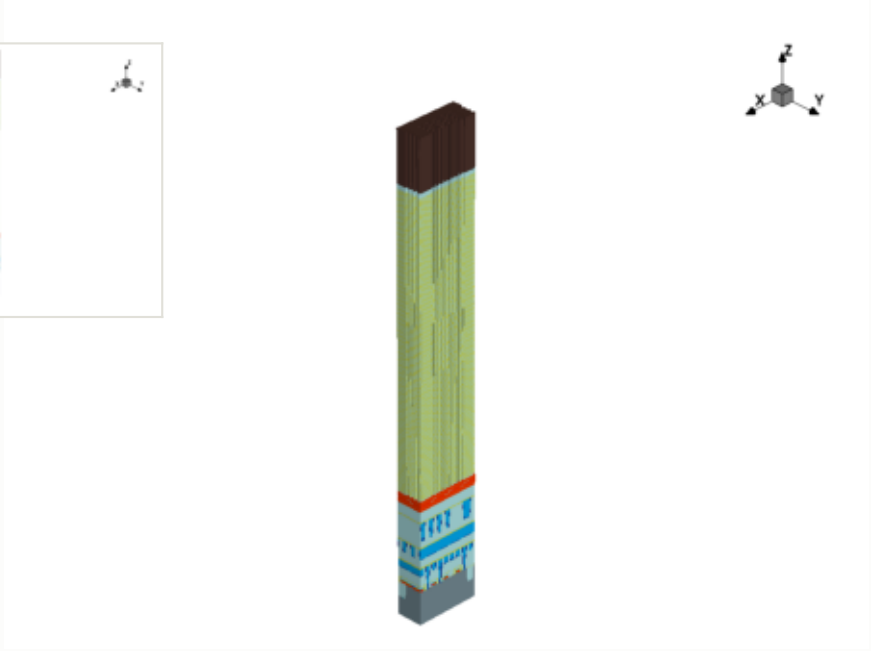

x cut at 0.000 µm

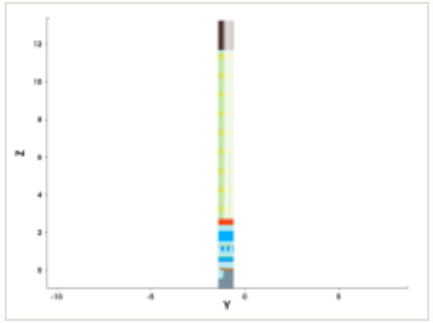

y cut at -1.035 µm

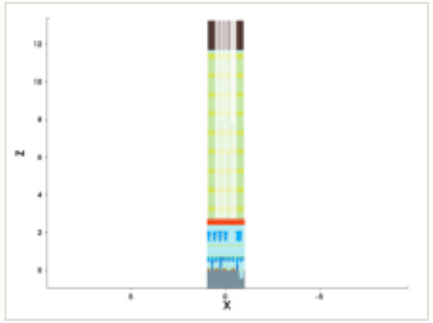

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

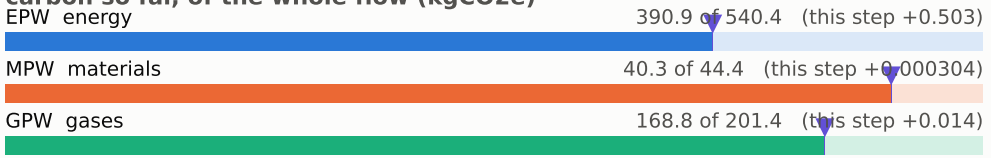


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

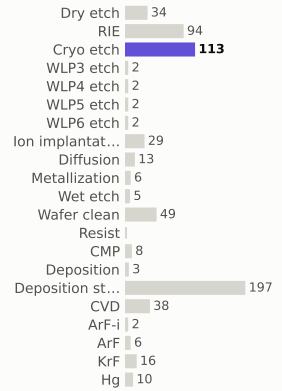

materials deposited (g)

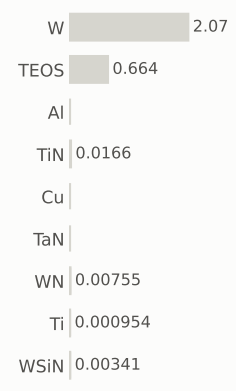

gases emitted (g)



Step #7285.7653: Cryo_etch


etch_noop · Cryo_etch

0.517	600.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



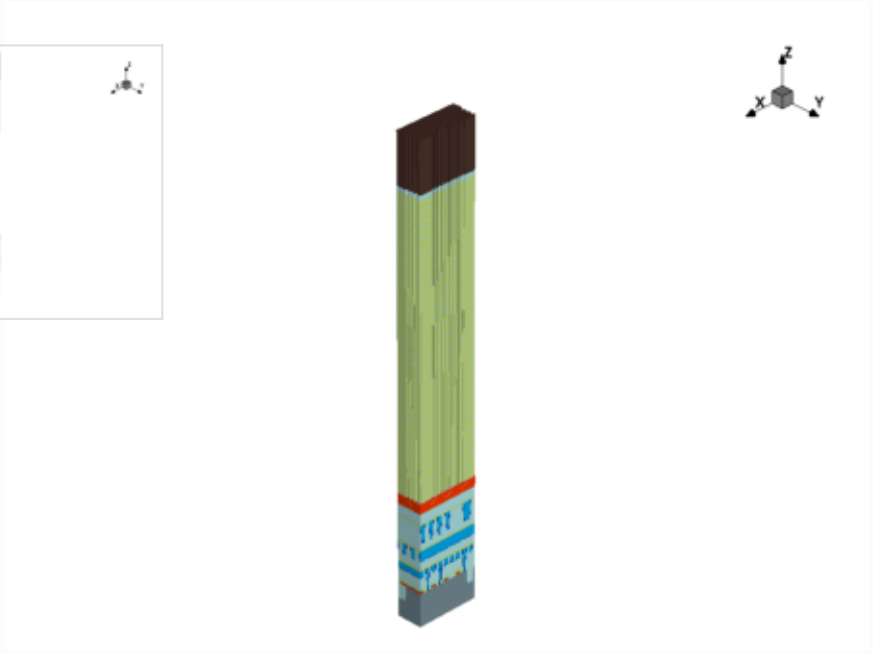


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

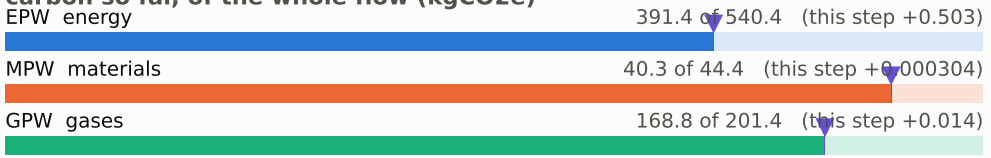


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

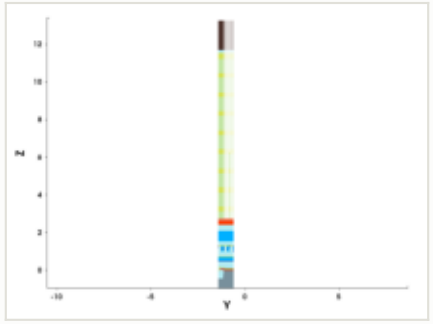


y cut at -1.035 µm

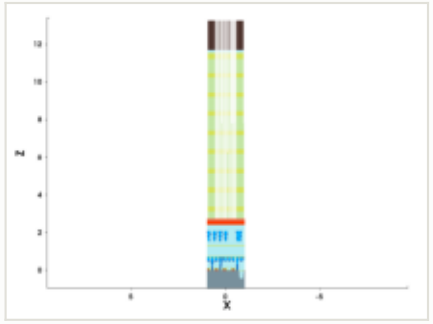


mask for this step

no mask for this step


steps by process area

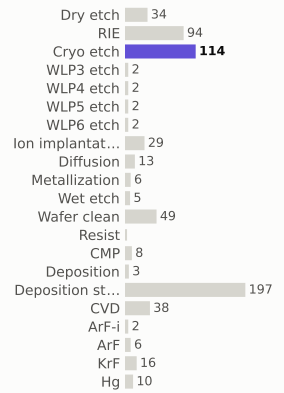

materials deposited (g)

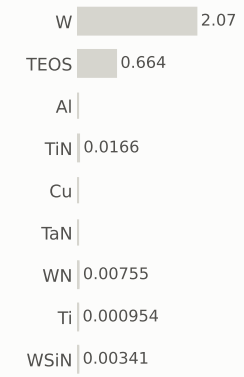

gases emitted (g)



Step #7285.8163: Cryo_etch


etch_noop · Cryo_etch

0.517	600.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



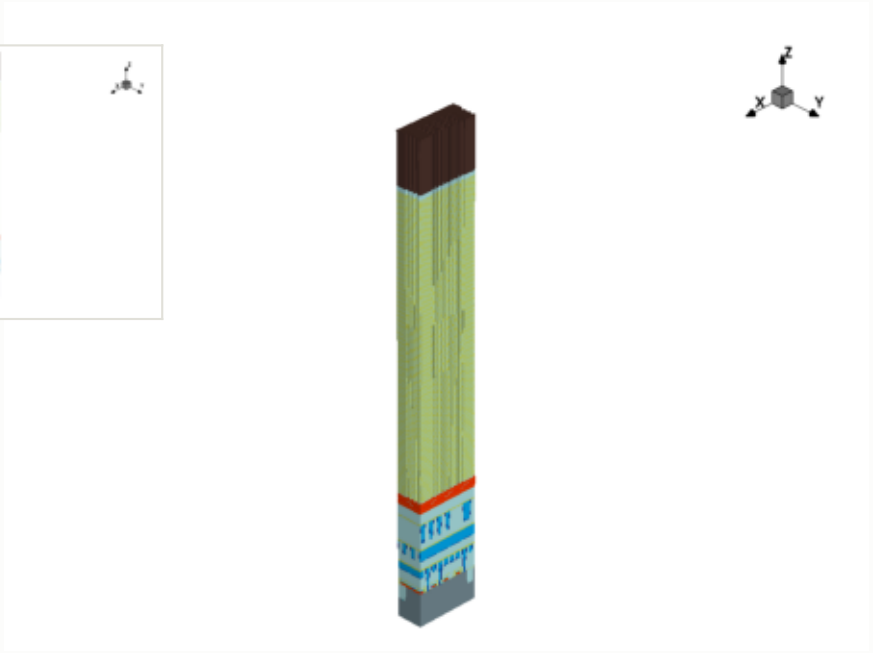


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead


EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

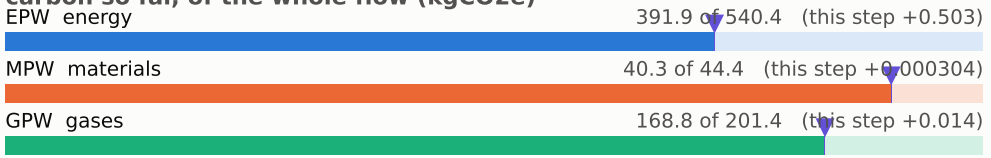


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

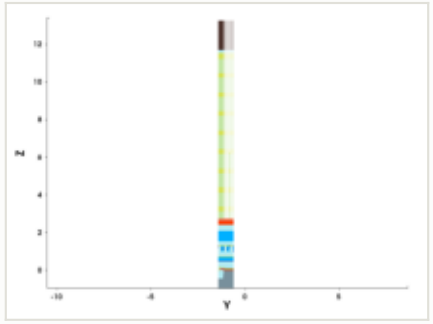


y cut at -1.035 µm

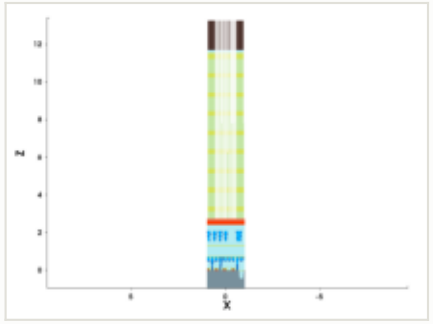


mask for this step

no mask for this step


steps by process area

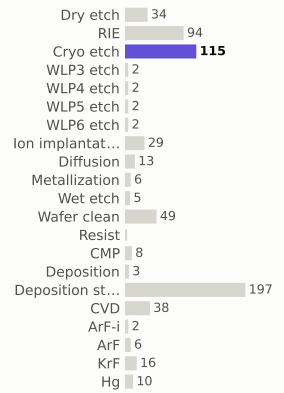

materials deposited (g)

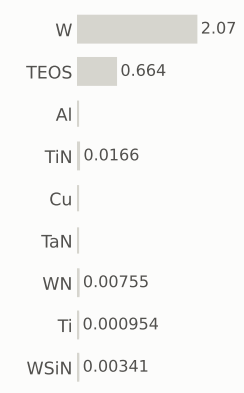

gases emitted (g)



Step #7285.8673: Cryo_etch


etch_noop · Cryo_etch

0.517	601.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




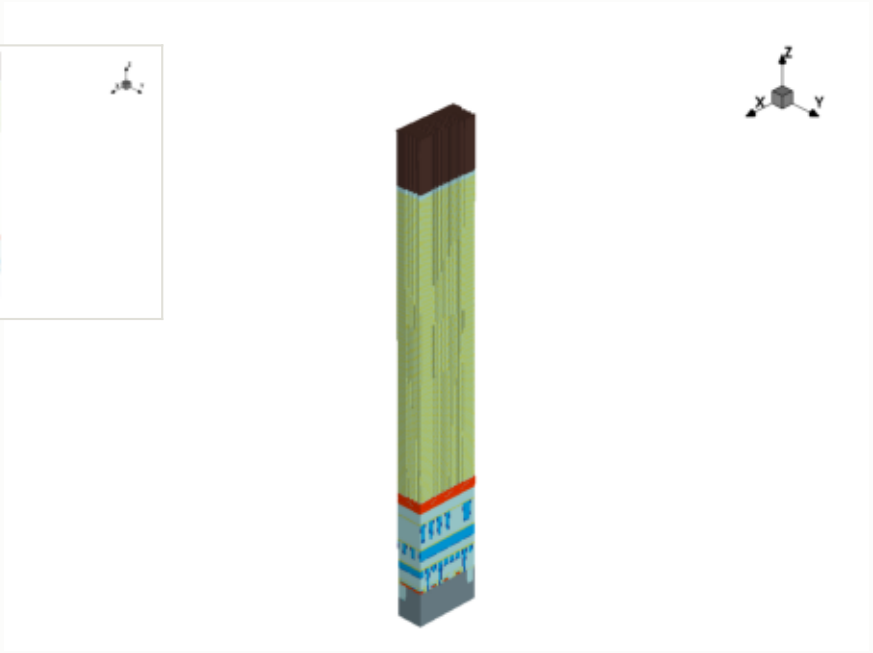

x cut at 0.000 µm

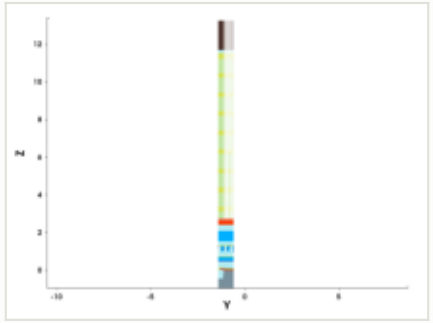

y cut at -1.035 µm

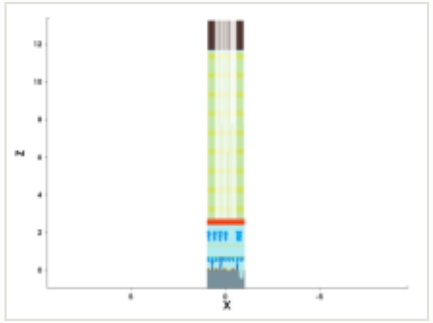

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

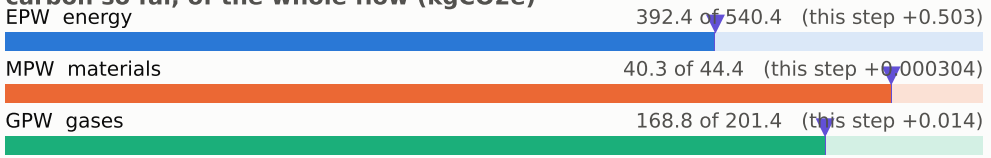


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

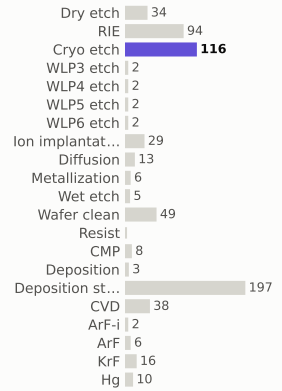

materials deposited (g)

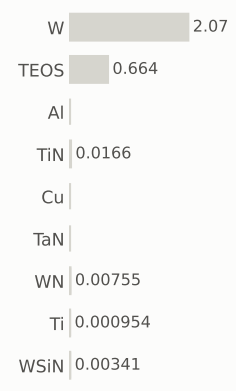

gases emitted (g)



Step #7285.9184: Cryo_etch


etch_noop · Cryo_etch

0.517	602.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




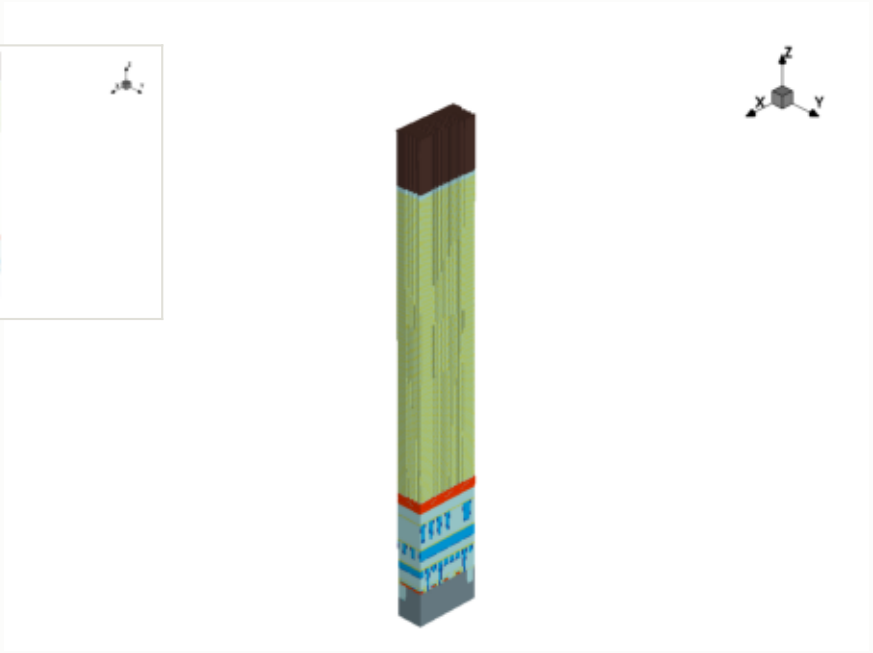

x cut at 0.000 µm

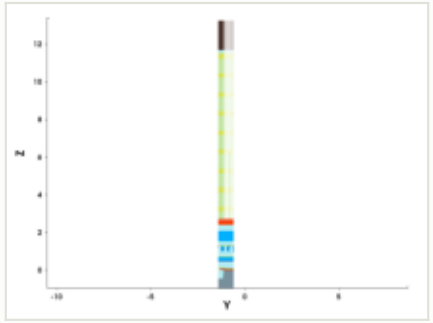

y cut at -1.035 µm

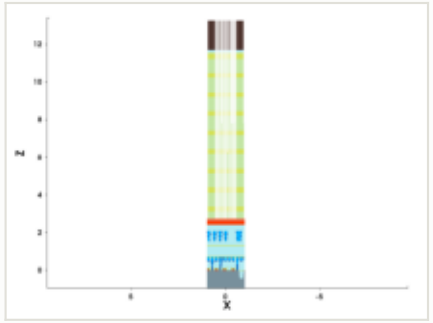

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

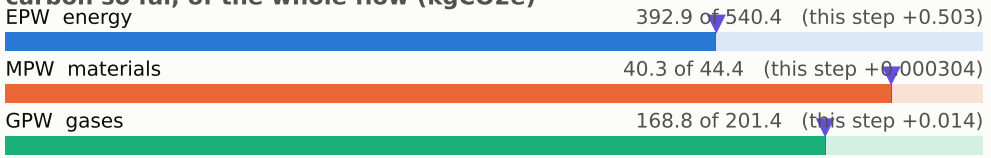


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

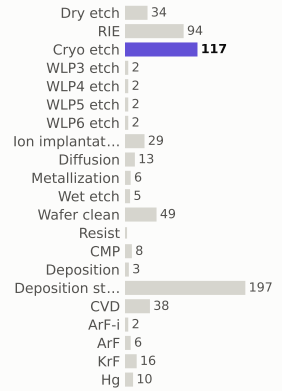

materials deposited (g)

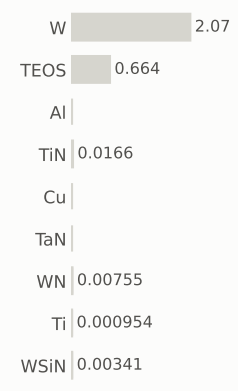

gases emitted (g)



Step #7285.9694: Cryo_etch


etch_noop · Cryo_etch

0.517	602.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



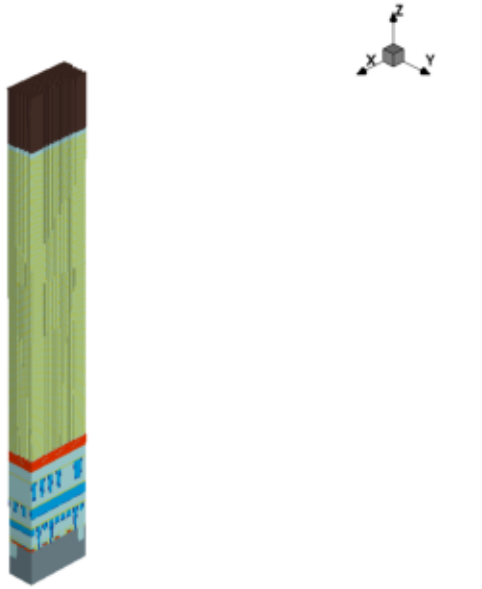


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead


EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

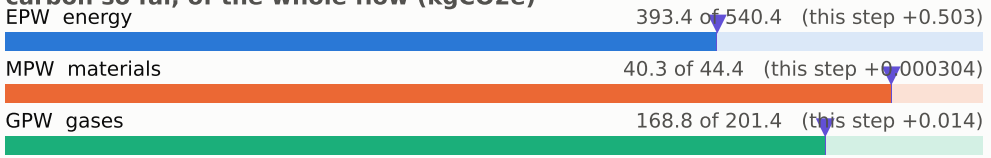


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

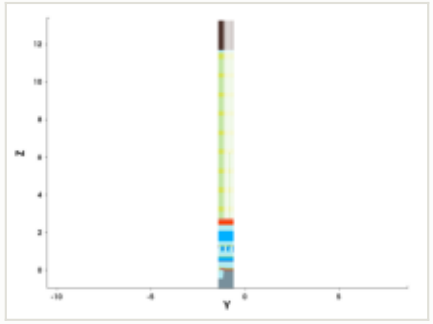


y cut at -1.035 µm

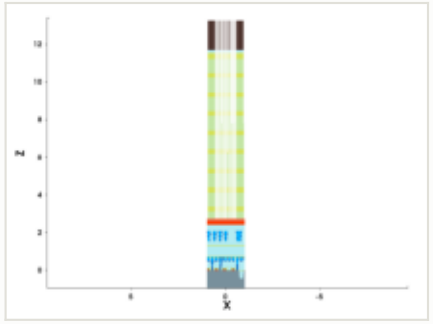


mask for this step

no mask for this step


steps by process area

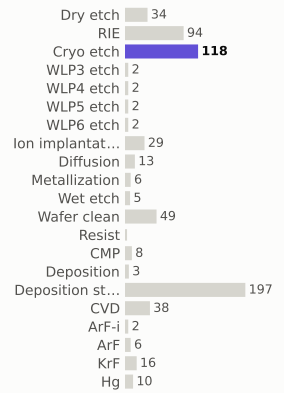

materials deposited (g)

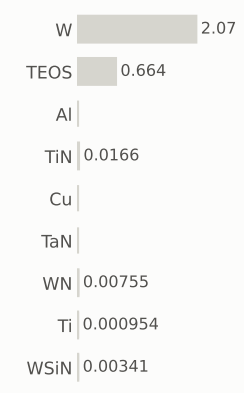

gases emitted (g)



Step #7286.0204: Cryo_etch


etch_noop · Cryo_etch

0.517	603.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




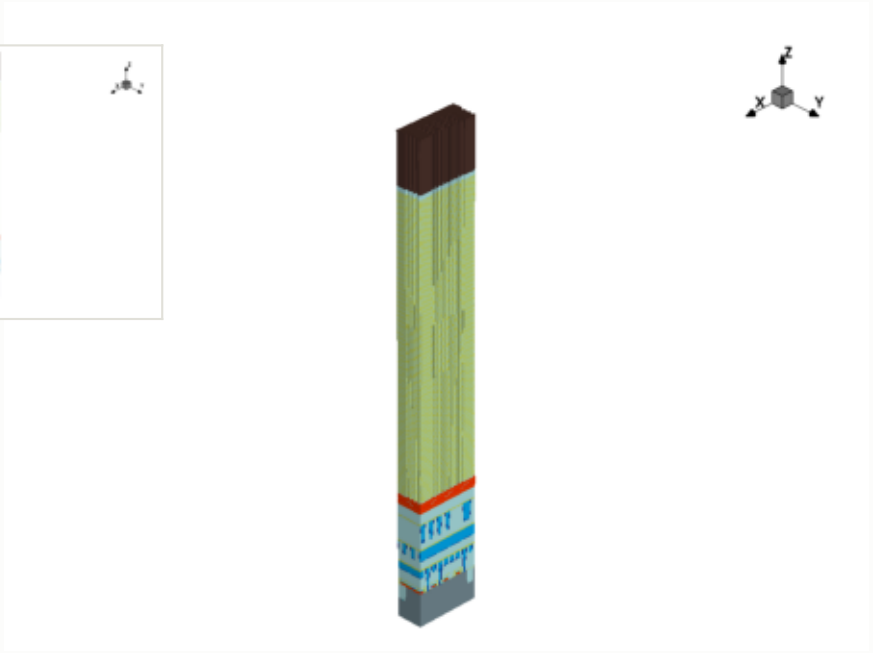

x cut at 0.000 µm

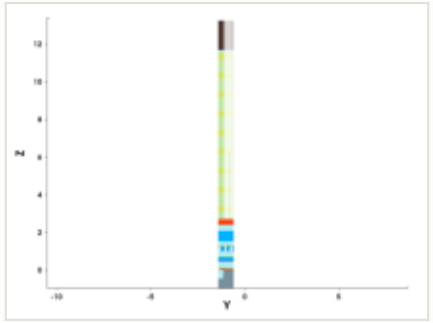

y cut at -1.035 µm

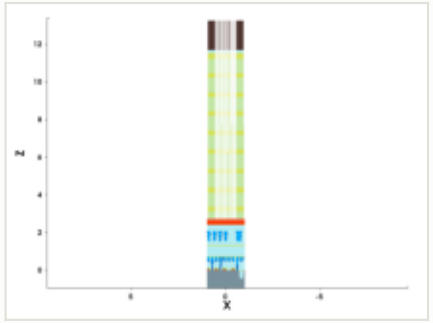

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

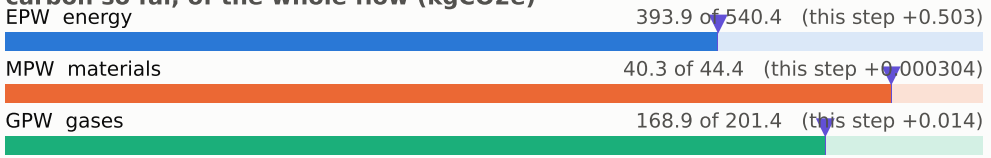


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

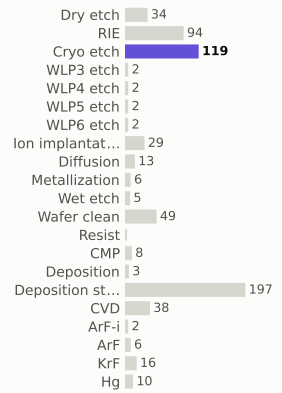

materials deposited (g)

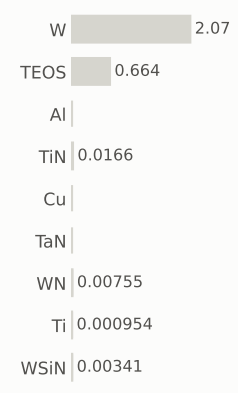

gases emitted (g)



Step #7286.0714: Cryo_etch


etch_noop · Cryo_etch

0.517	603.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



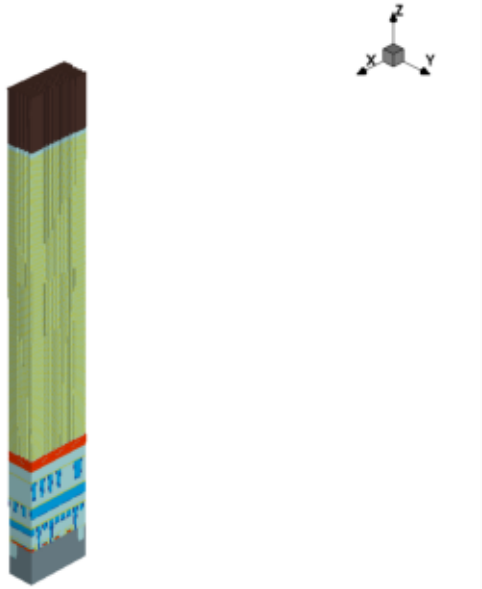


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

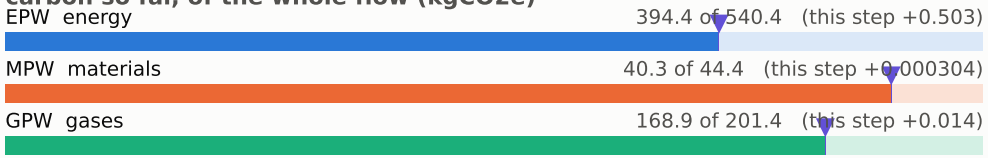


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

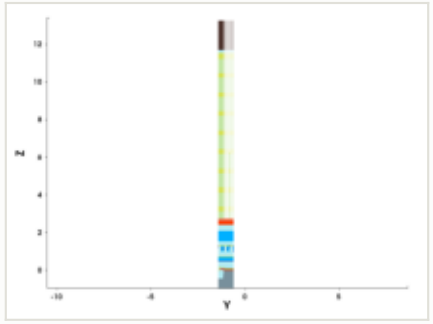


y cut at -1.035 µm

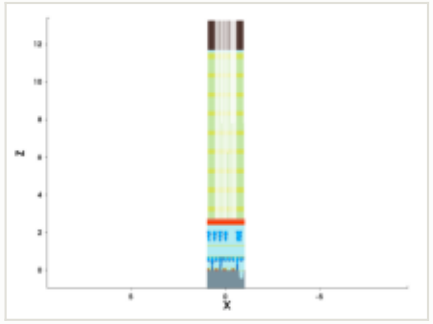


mask for this step

no mask for this step


steps by process area

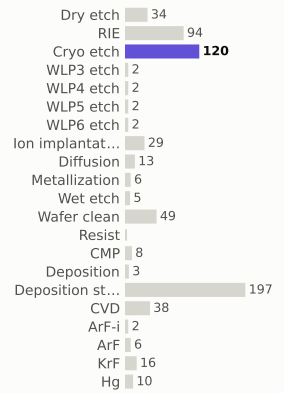

materials deposited (g)

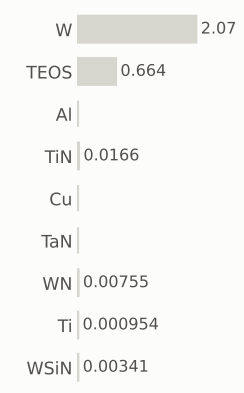

gases emitted (g)

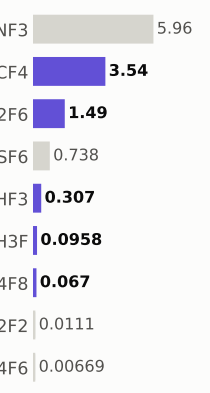

Step #7286.1224: Cryo_etch


etch_noop · Cryo_etch

0.517	604.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




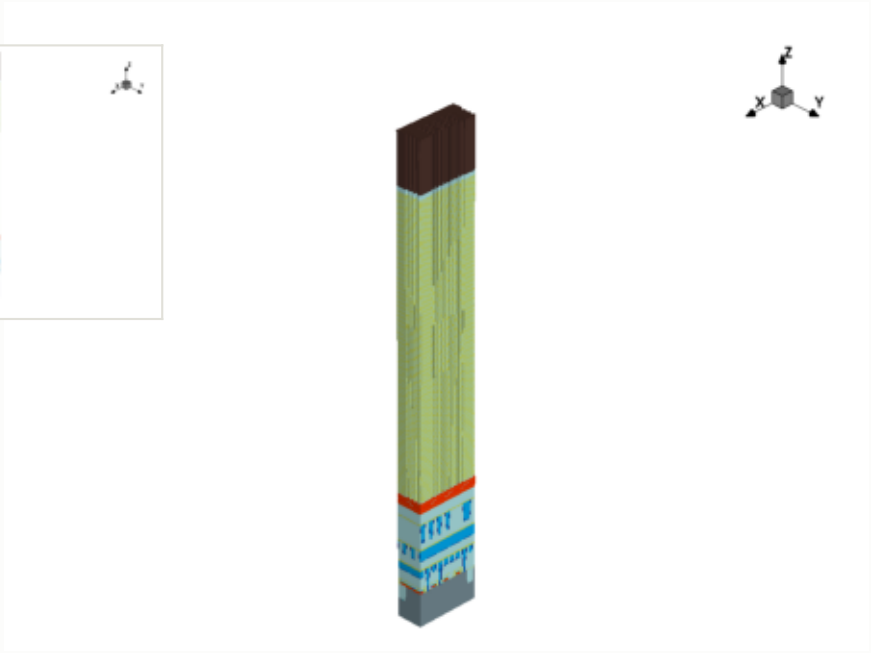

x cut at 0.000 µm

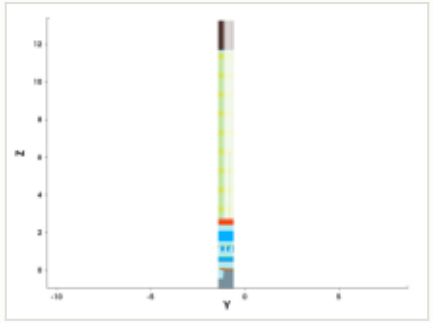

y cut at -1.035 µm

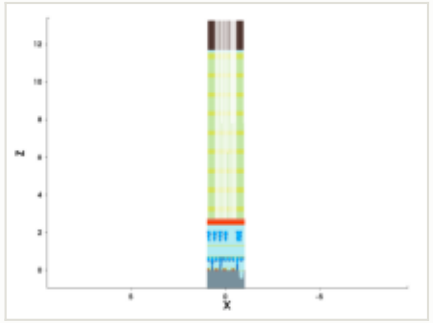

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

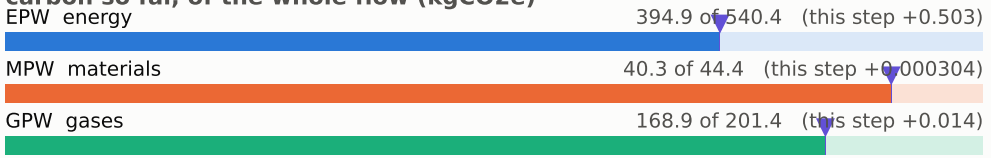


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

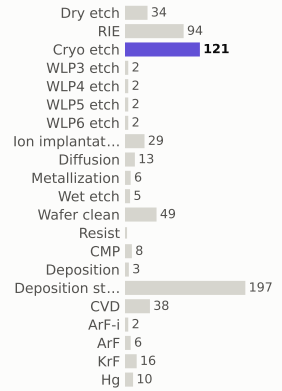

materials deposited (g)

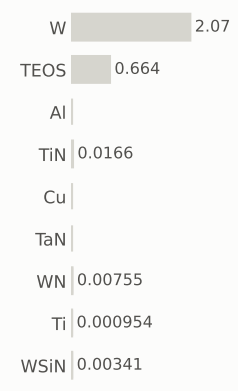

gases emitted (g)



Step #7286.1735: Cryo_etch


etch_noop · Cryo_etch

0.517	604.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




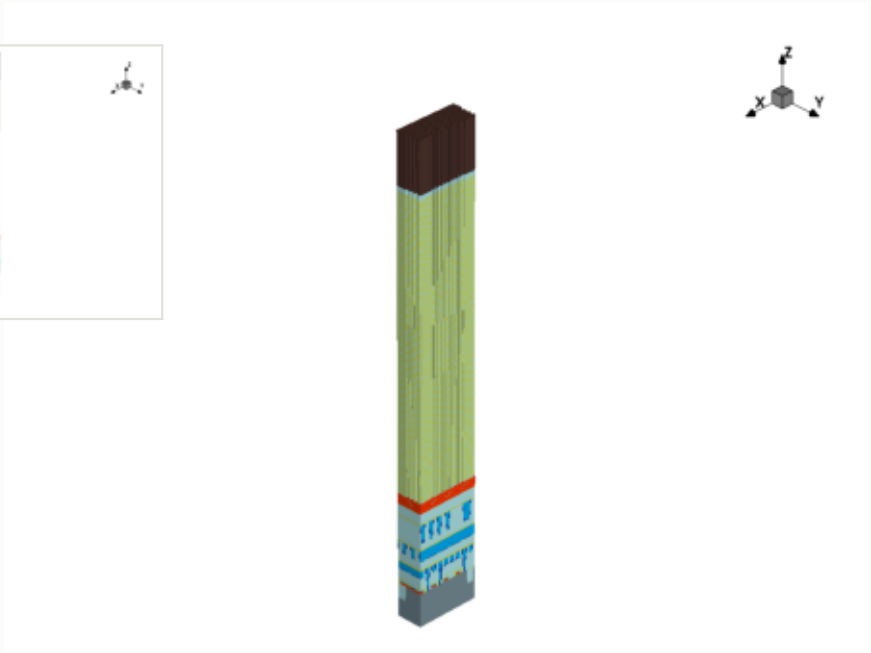

x cut at 0.000 µm

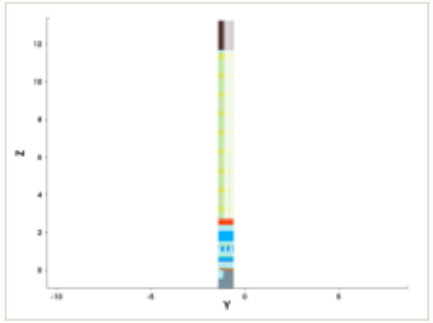

y cut at -1.035 µm

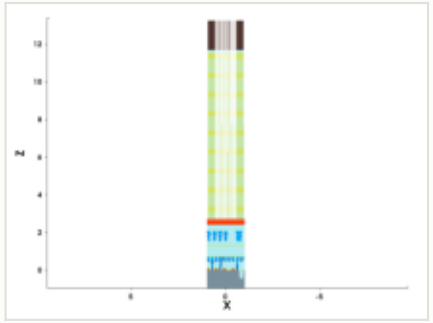

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

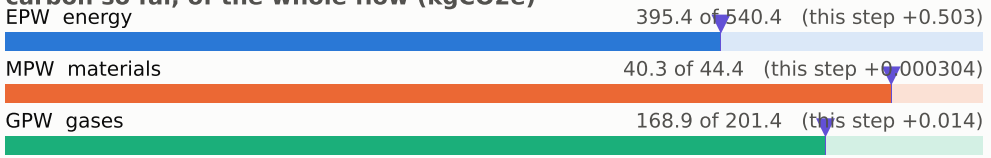


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

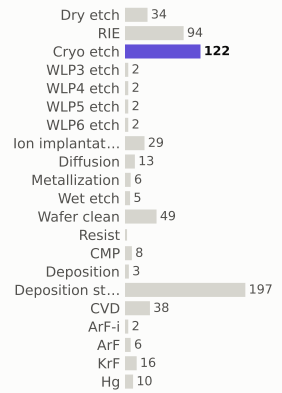

materials deposited (g)

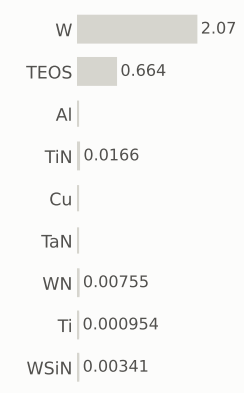

gases emitted (g)



Step #7286.2245: Cryo_etch


etch_noop · Cryo_etch

0.517	605.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




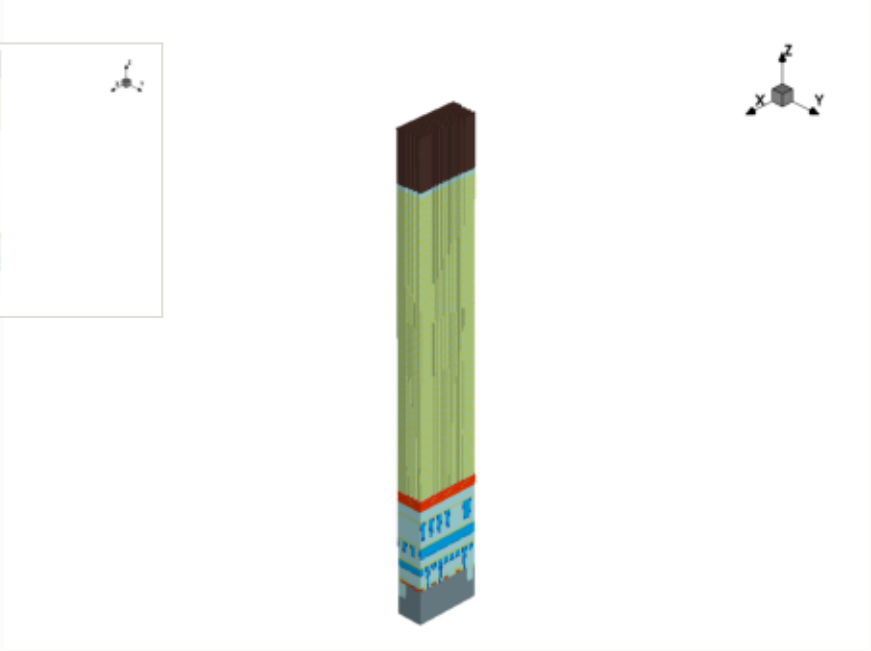

x cut at 0.000 µm

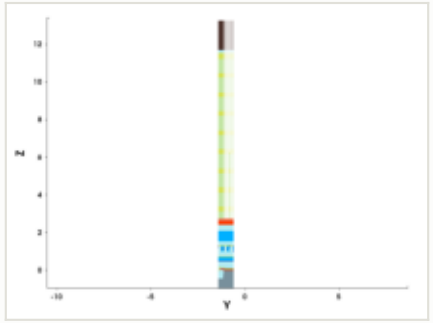

y cut at -1.035 µm

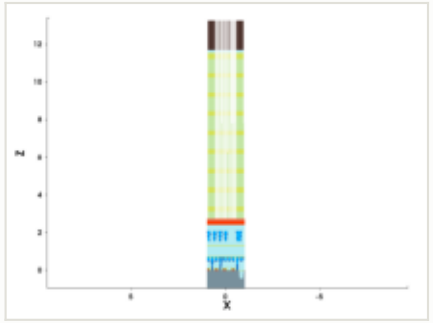

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

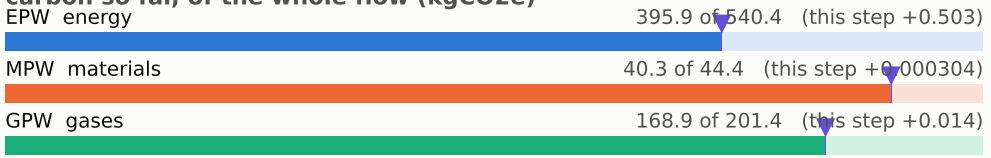


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

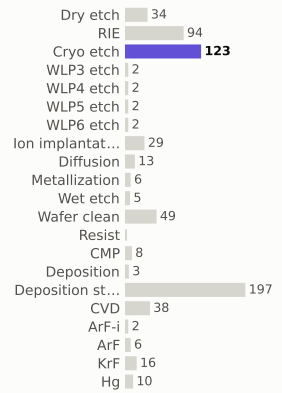

materials deposited (g)

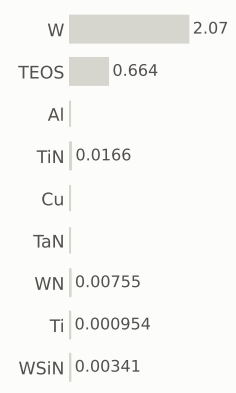

gases emitted (g)



Step #7286.2755: Cryo_etch


etch_noop · Cryo_etch

0.517	605.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




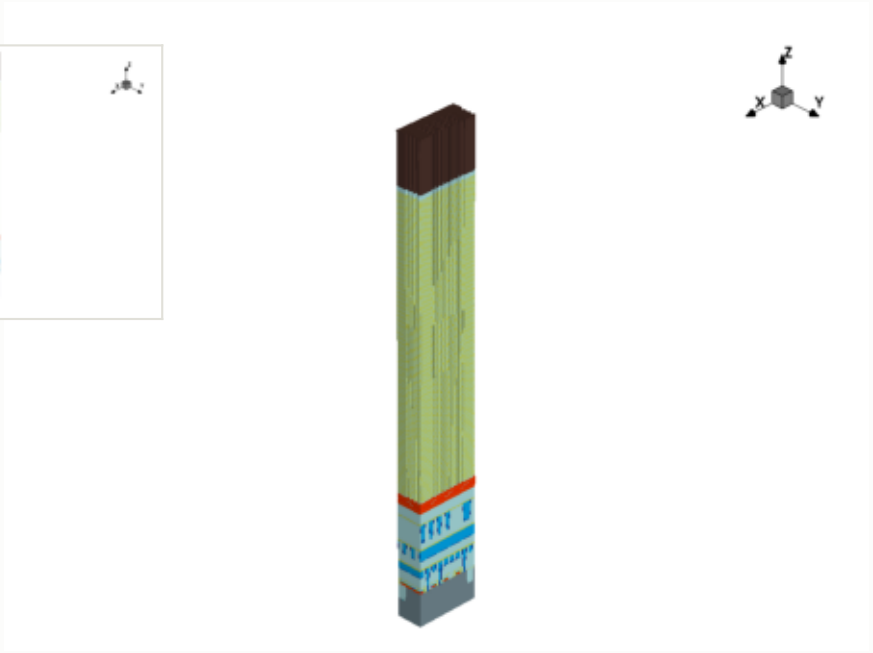

x cut at 0.000 µm

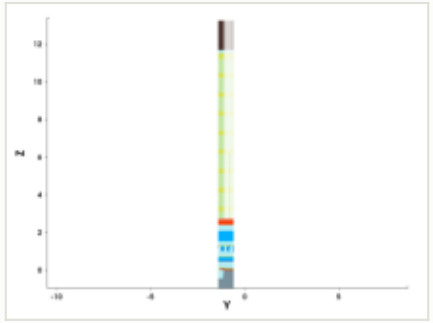

y cut at -1.035 µm

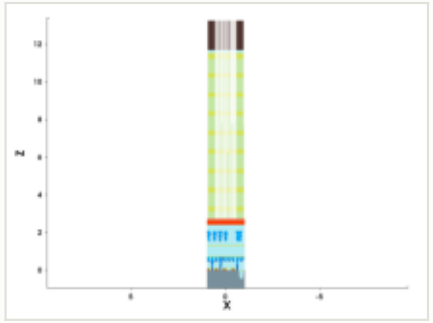

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

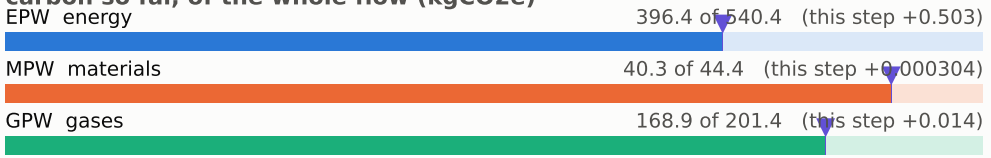


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

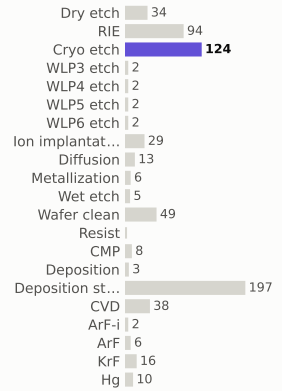

materials deposited (g)

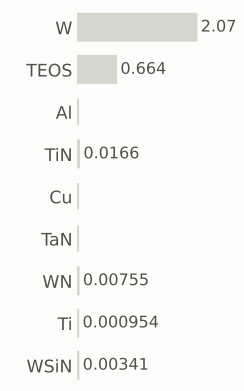

gases emitted (g)



Step #7286.3265: Cryo_etch


etch_noop · Cryo_etch

0.517	606.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



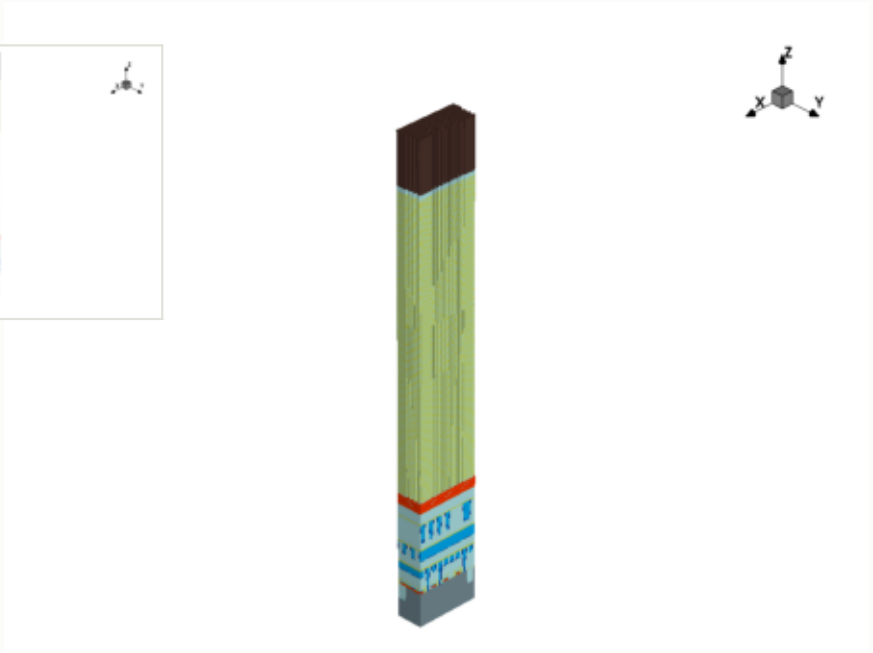


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

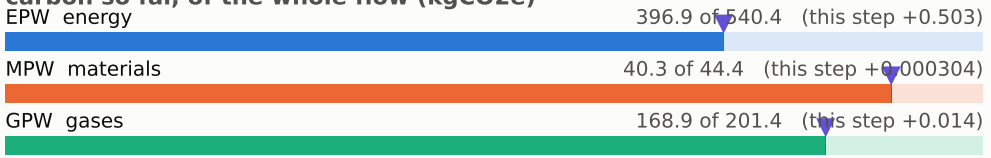


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

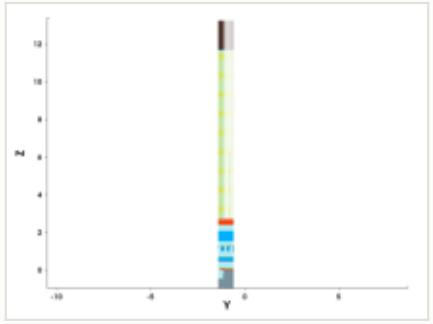


y cut at -1.035 µm

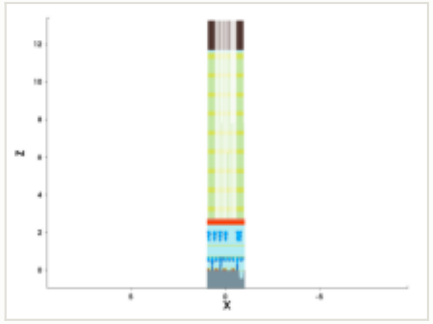


mask for this step

no mask for this step


steps by process area

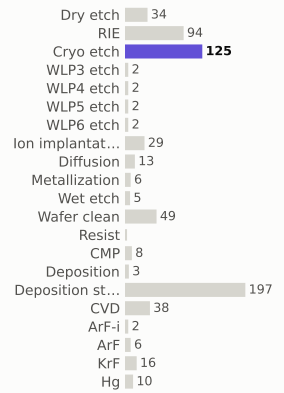

materials deposited (g)

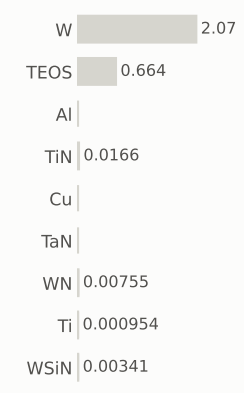

gases emitted (g)



Step #7286.3776: Cryo_etch


etch_noop · Cryo_etch

0.517	606.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




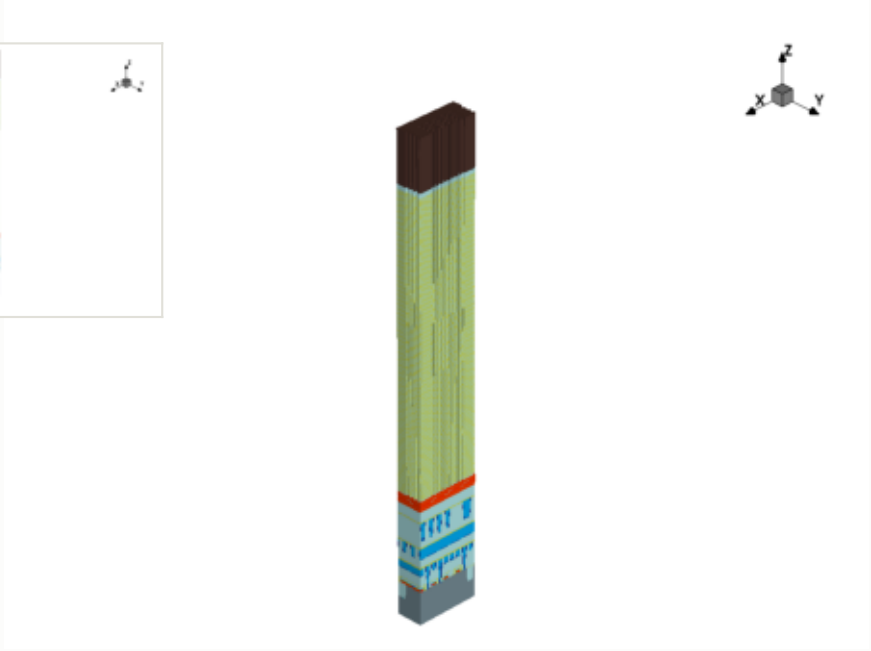

x cut at 0.000 µm

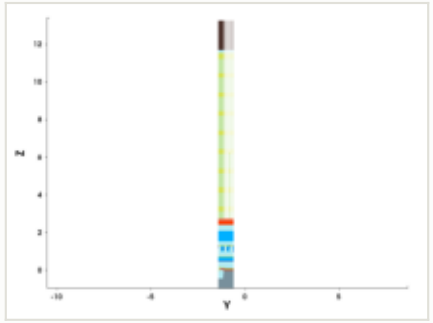

y cut at -1.035 µm

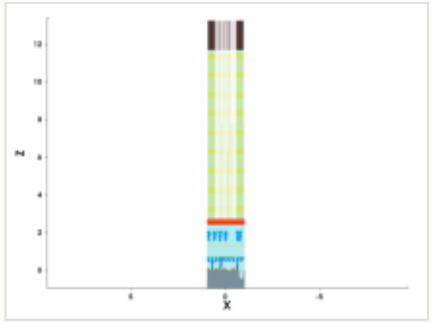

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

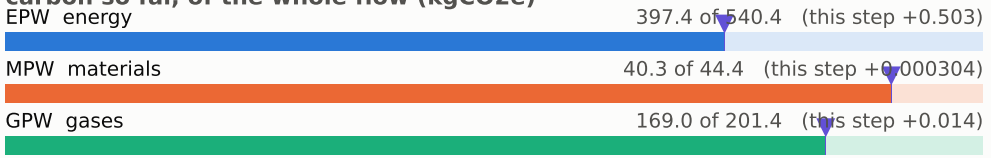


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

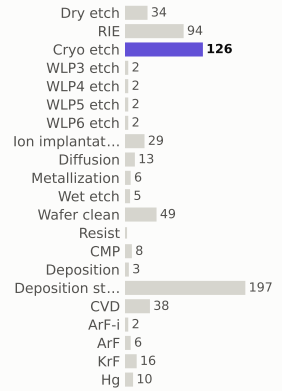

materials deposited (g)

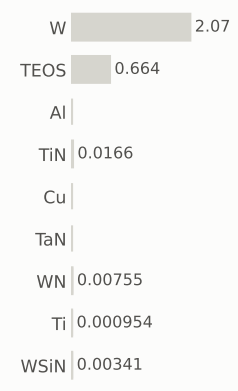

gases emitted (g)



Step #7286.4286: Cryo_etch


etch_noop · Cryo_etch

0.517	607.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




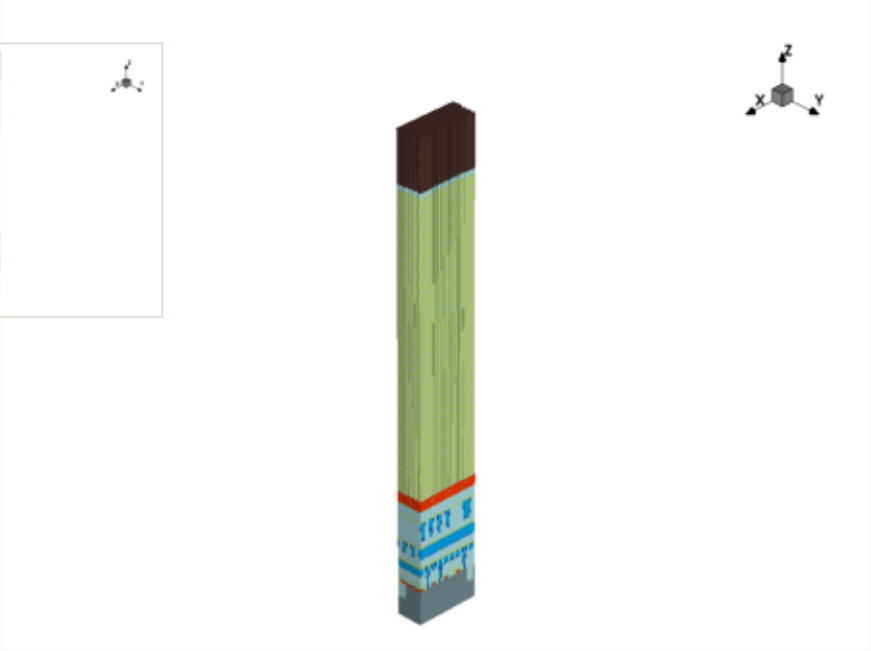

x cut at 0.000 µm

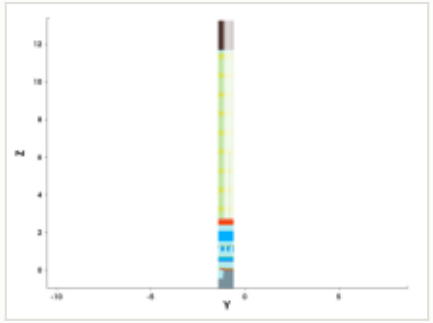

y cut at -1.035 µm

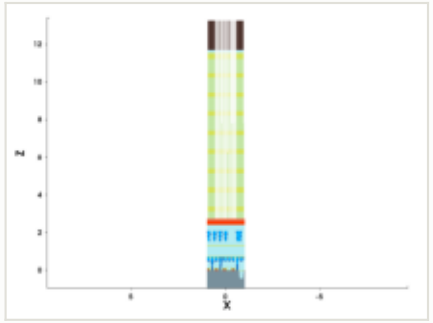

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

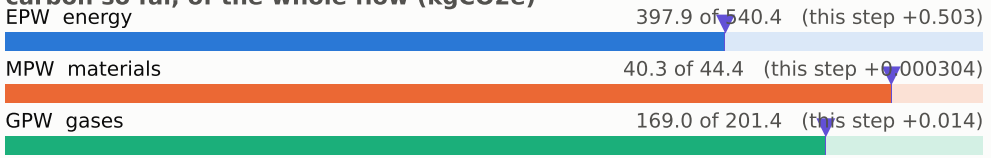


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

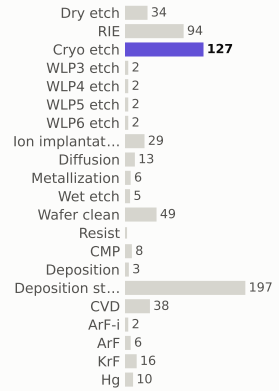

materials deposited (g)

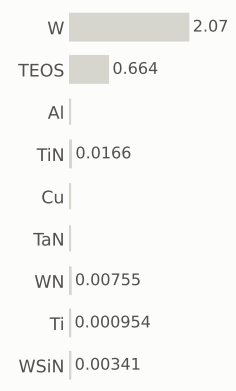

gases emitted (g)



Step #7286.4796: Cryo_etch


etch_noop · Cryo_etch

0.517	607.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



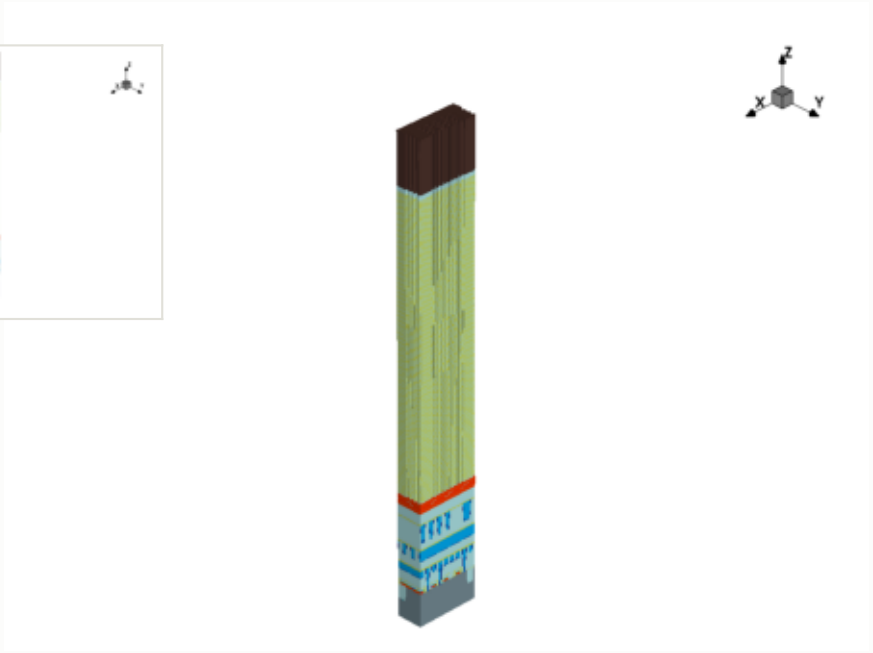


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

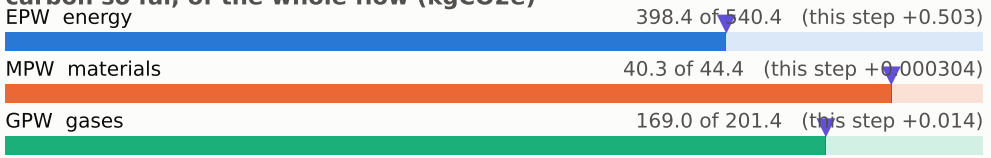


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

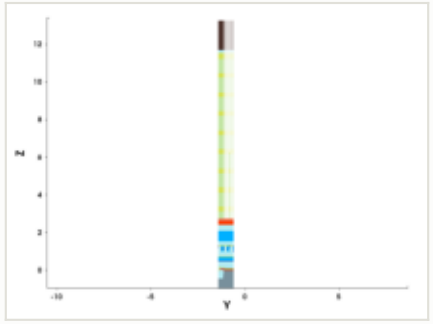


y cut at -1.035 µm

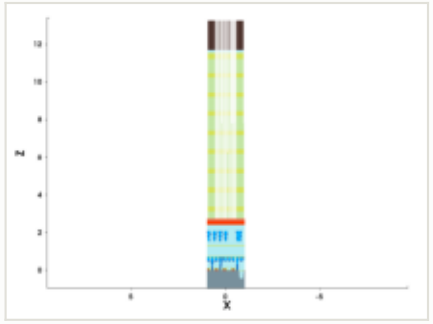


mask for this step

no mask for this step


steps by process area

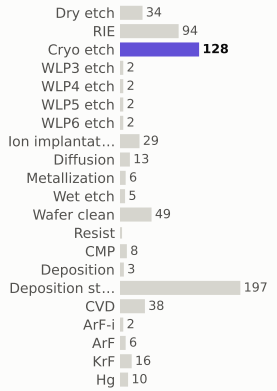

materials deposited (g)

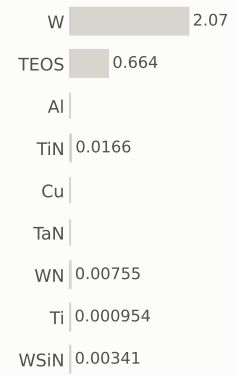

gases emitted (g)



Step #7286.5306: Cryo_etch


etch_noop · Cryo_etch

0.517	608.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




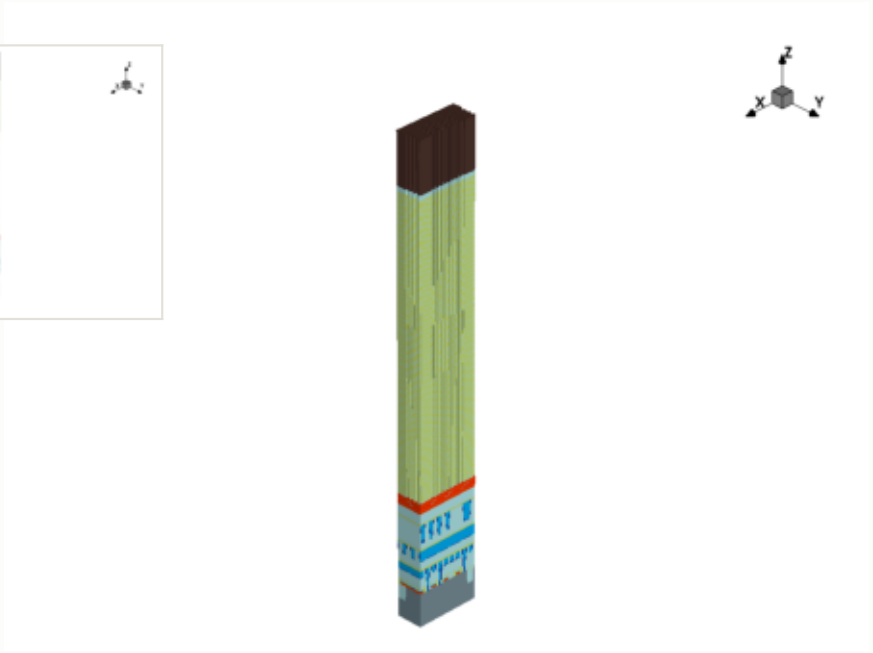

x cut at 0.000 µm

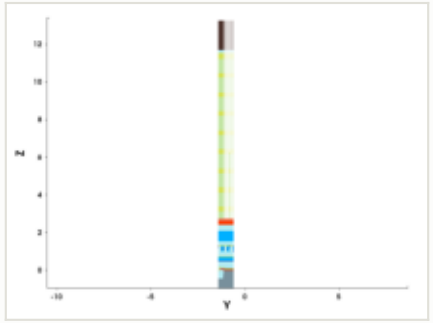

y cut at -1.035 µm

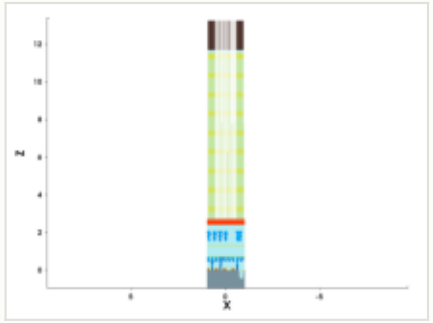

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

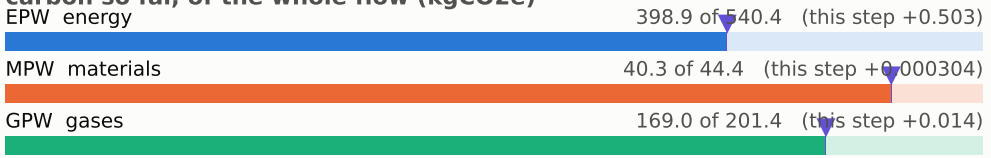


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

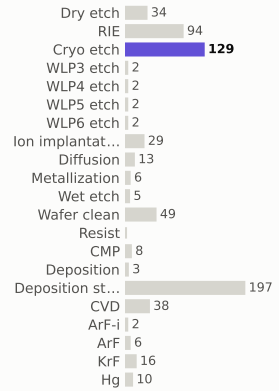

materials deposited (g)

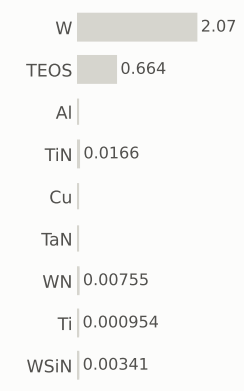

gases emitted (g)



Step #7286.5816: Cryo_etch


etch_noop · Cryo_etch

0.517	608.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



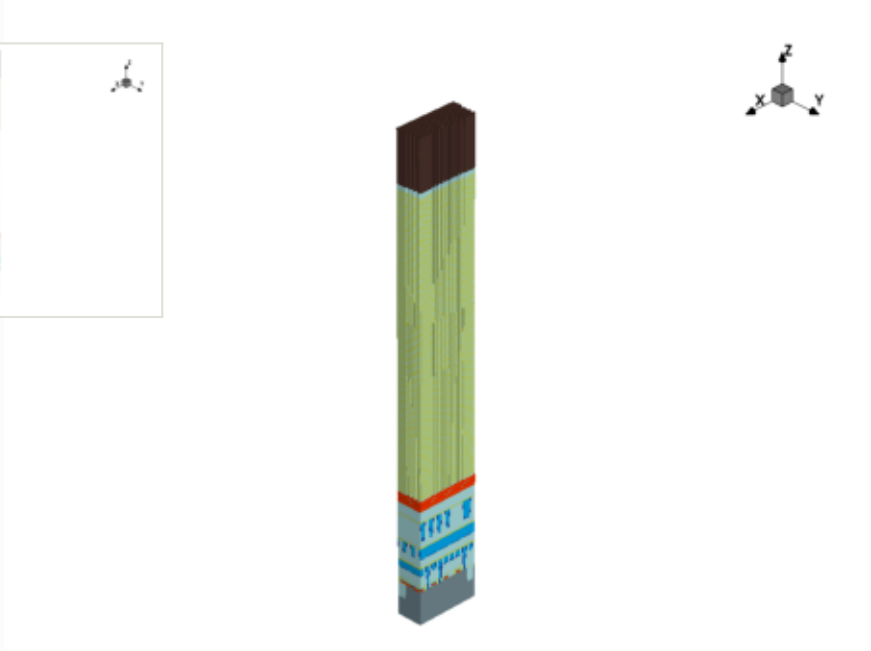


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

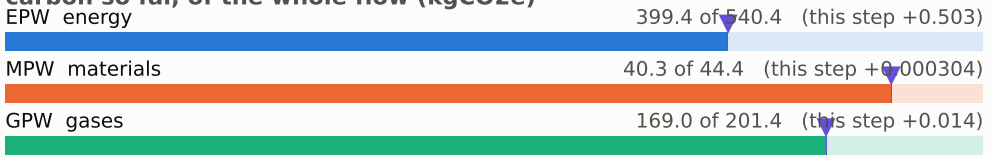


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

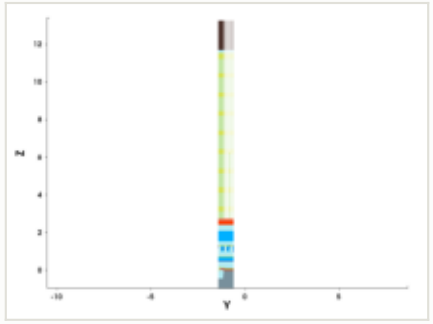


y cut at -1.035 µm

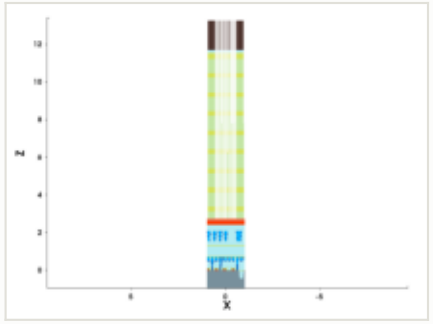


mask for this step

no mask for this step


steps by process area

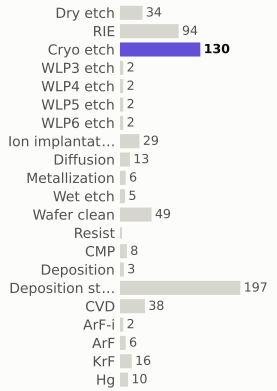

materials deposited (g)

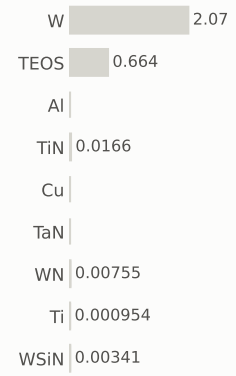

gases emitted (g)



Step #7286.6327: Cryo_etch


etch_noop · Cryo_etch

0.517	609.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



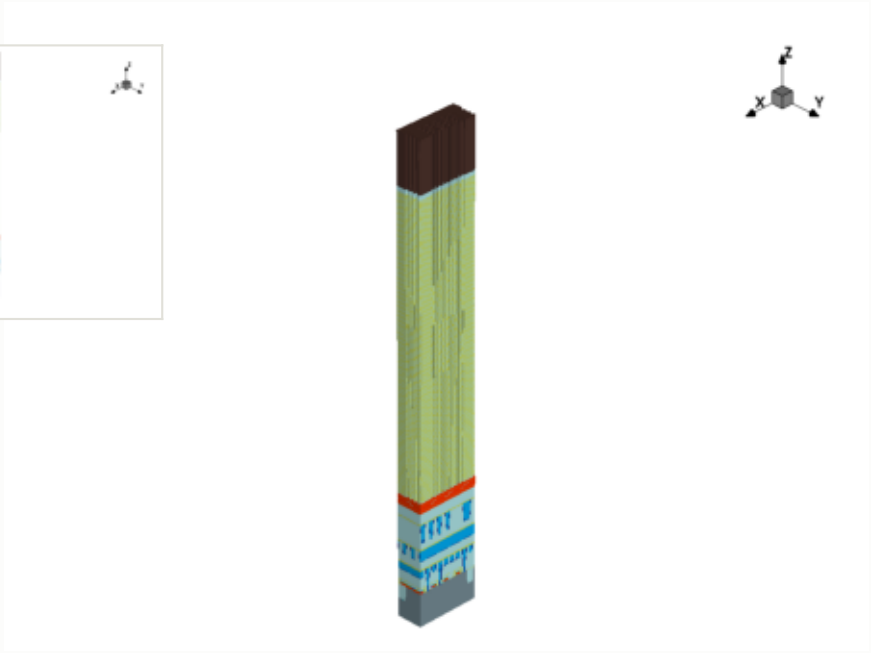


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

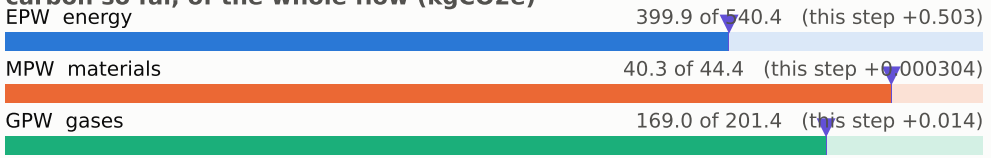


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

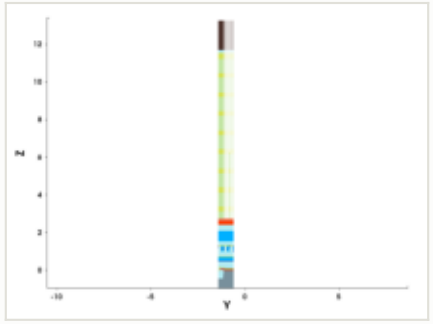


y cut at -1.035 µm

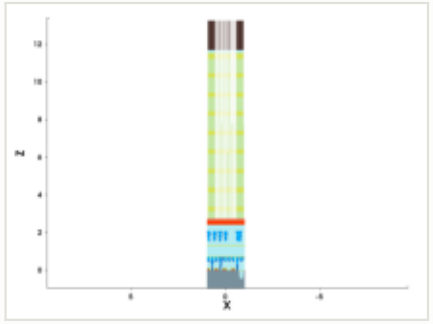


mask for this step

no mask for this step


steps by process area

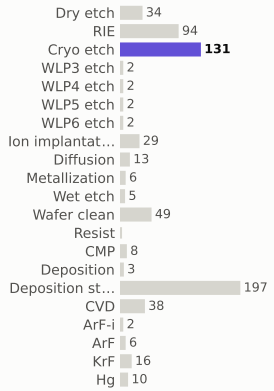

materials deposited (g)

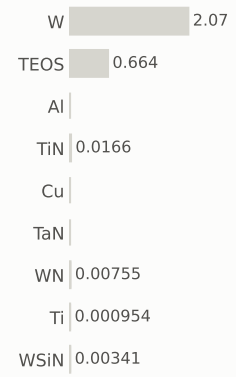

gases emitted (g)



Step #7286.6837: Cryo_etch

etch_noop · Cryo_etch

0.517	609.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

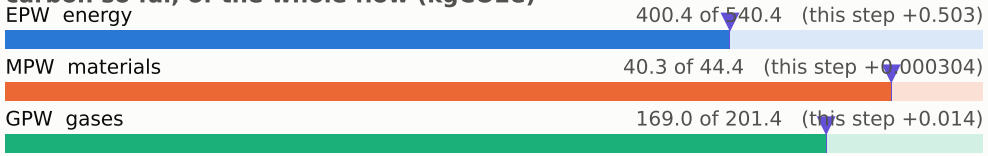


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

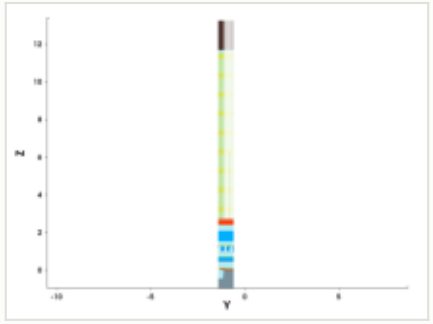


y cut at -1.035 µm

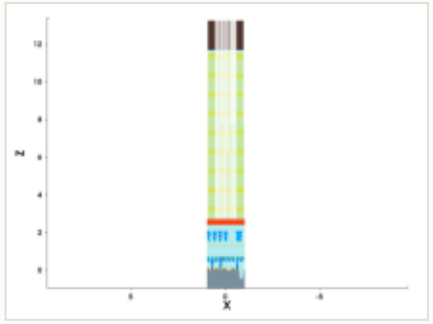


mask for this step

no mask for this step


steps by process area

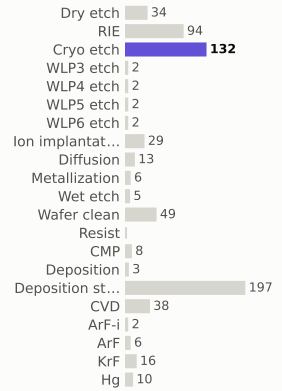

materials deposited (g)

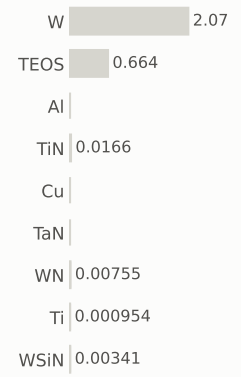

gases emitted (g)



Step #7286.7347: Cryo_etch


etch_noop · Cryo_etch

0.517	610.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



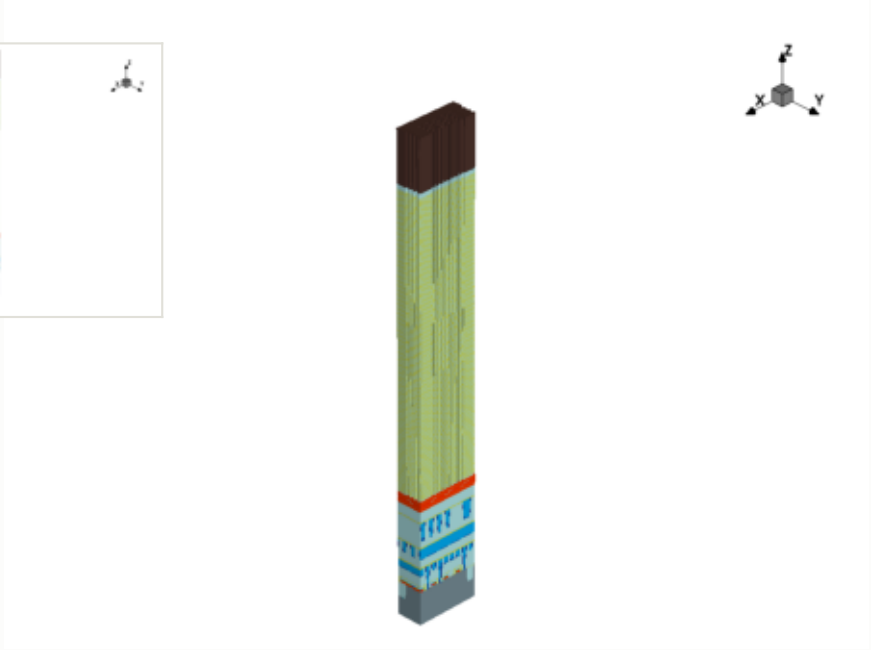


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

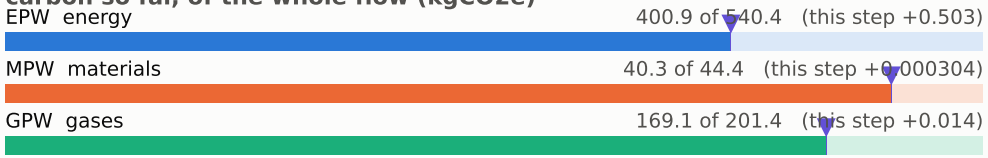


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

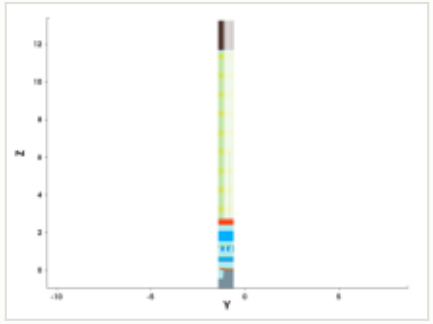


y cut at -1.035 µm

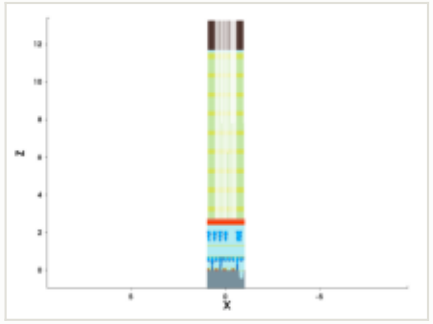


mask for this step

no mask for this step


steps by process area

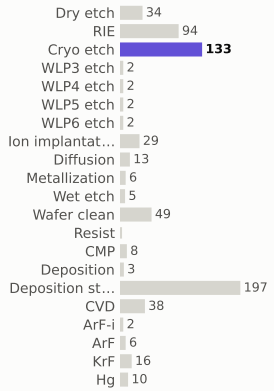

materials deposited (g)

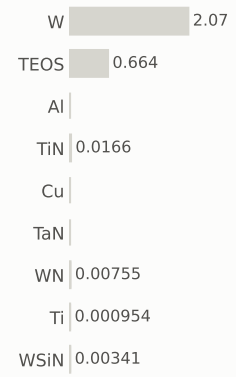

gases emitted (g)



Step #7286.7857: Cryo_etch


etch_noop · Cryo_etch

0.517	610.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



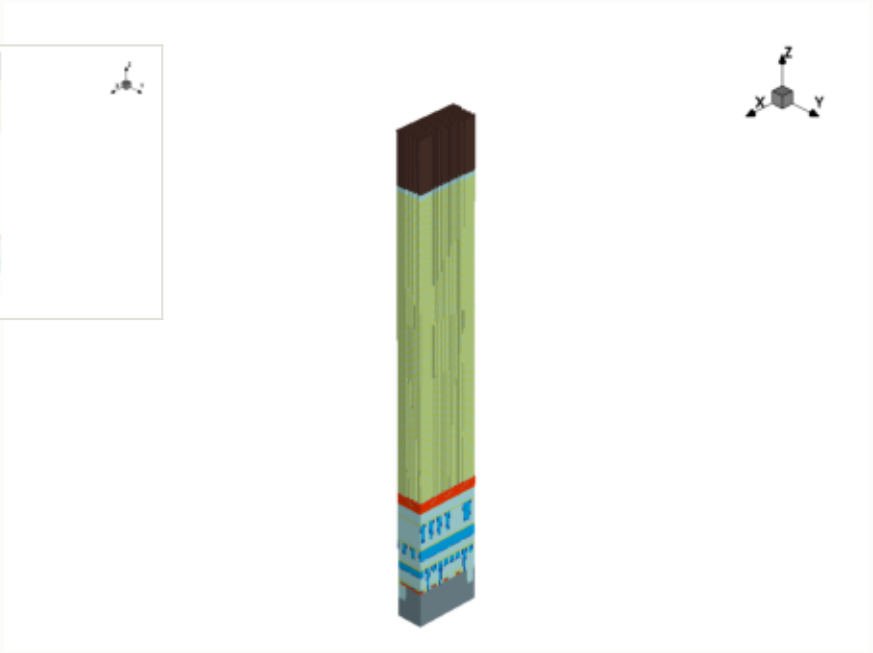


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

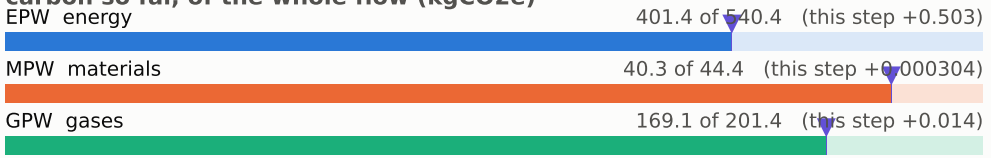


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

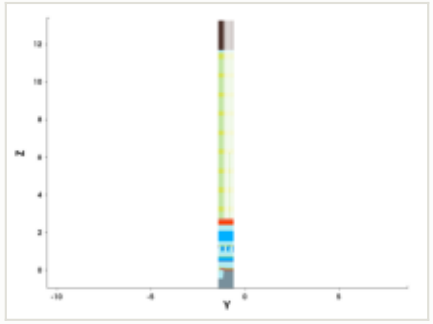


y cut at -1.035 µm

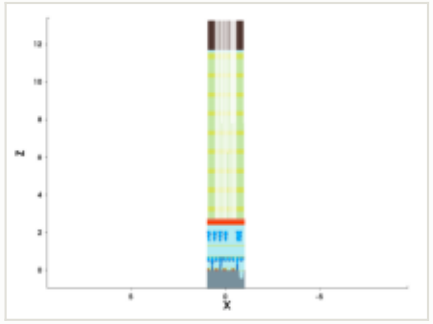


mask for this step

no mask for this step


steps by process area

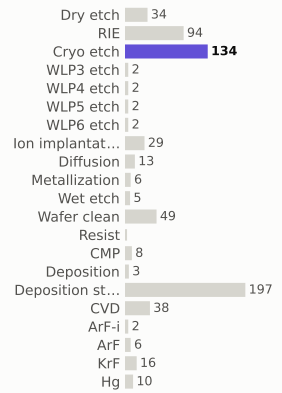

materials deposited (g)

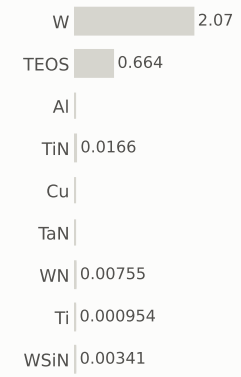

gases emitted (g)



Step #7286.8367: Cryo_etch


etch_noop · Cryo_etch

0.517	611.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



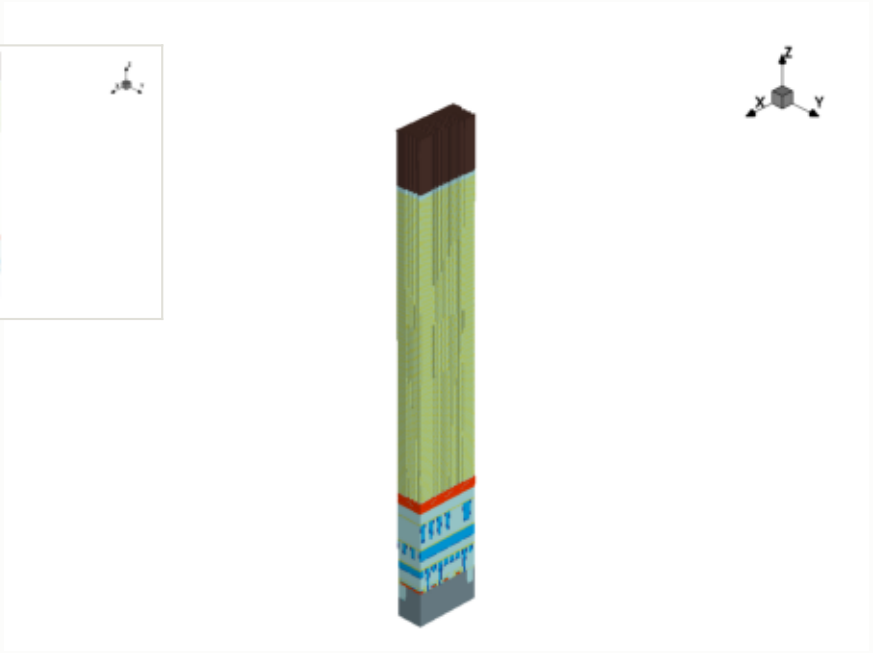


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

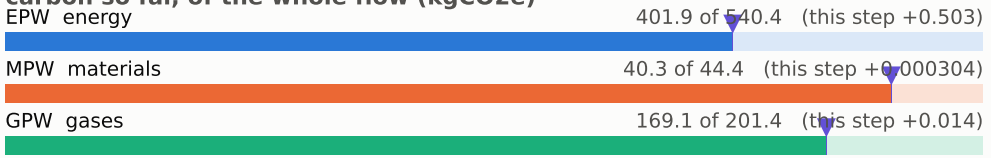


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

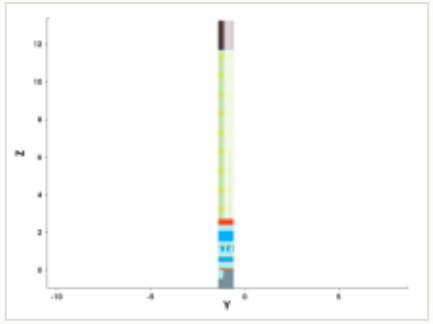


y cut at -1.035 µm

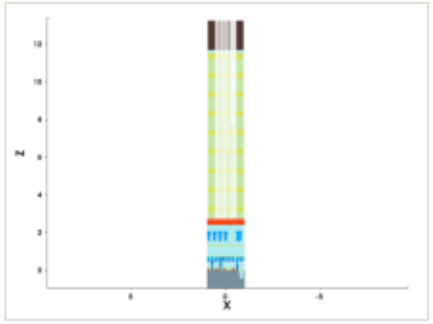


mask for this step

no mask for this step


steps by process area

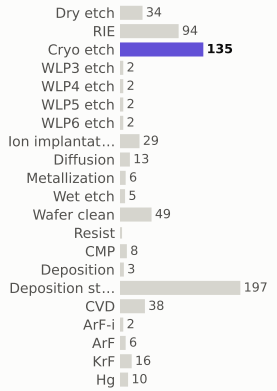

materials deposited (g)

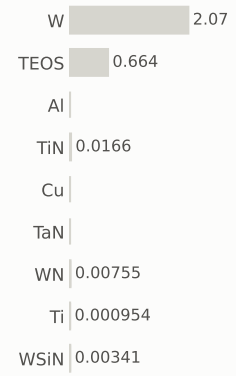

gases emitted (g)



Step #7286.8878: Cryo_etch


etch_noop · Cryo_etch

0.517	611.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



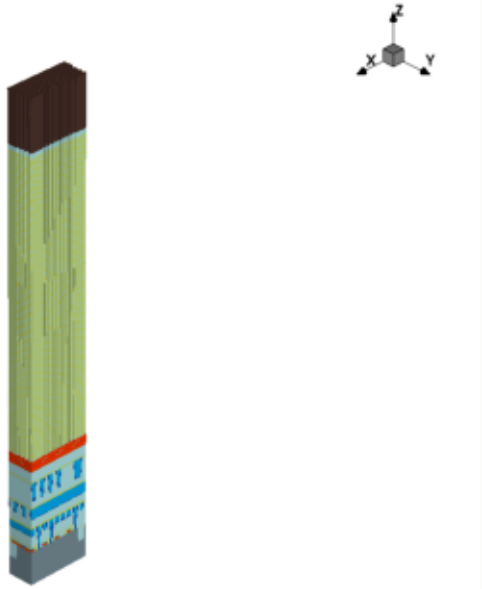


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

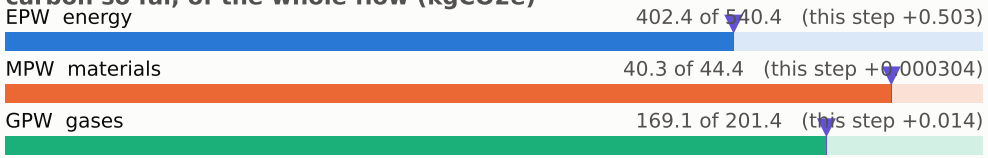


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

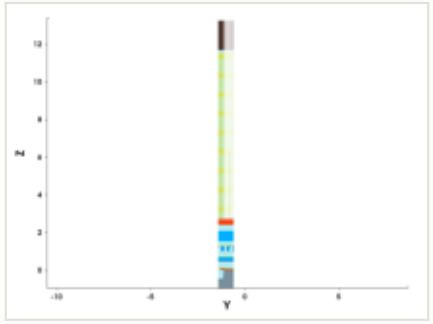


y cut at -1.035 µm

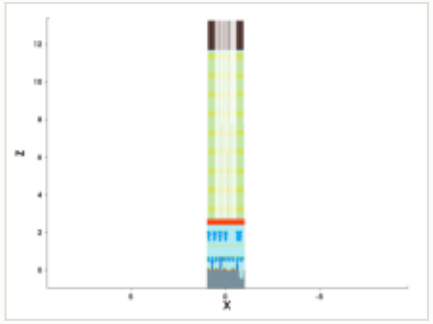


mask for this step

no mask for this step


steps by process area

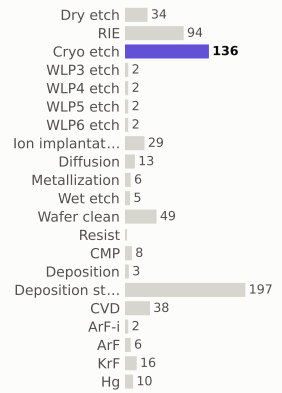

materials deposited (g)

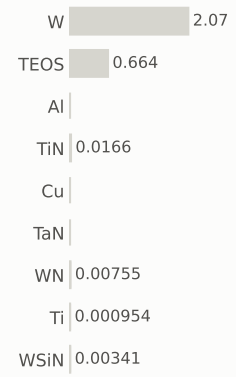

gases emitted (g)



Step #7286.9388: Cryo_etch


etch_noop · Cryo_etch

0.517	612.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



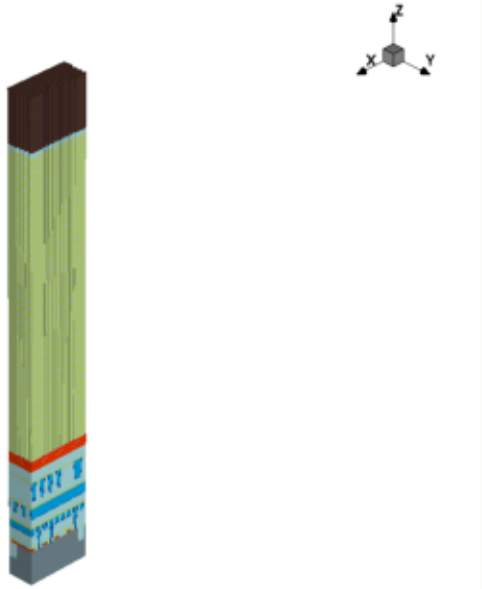


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

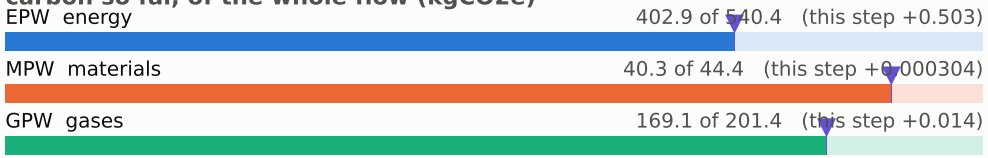


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

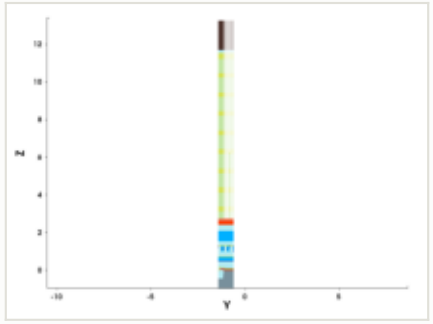


y cut at -1.035 µm

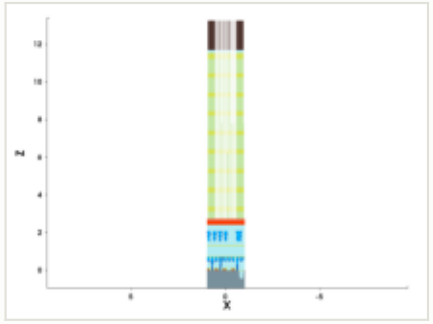


mask for this step

no mask for this step


steps by process area

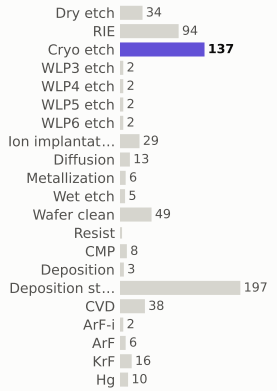

materials deposited (g)

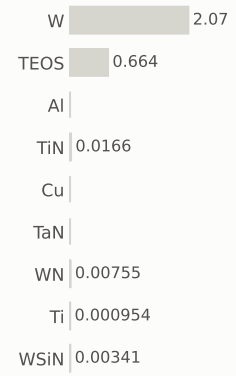

gases emitted (g)



Step #7286.9898: Cryo_etch


etch_noop · Cryo_etch

0.517	612.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




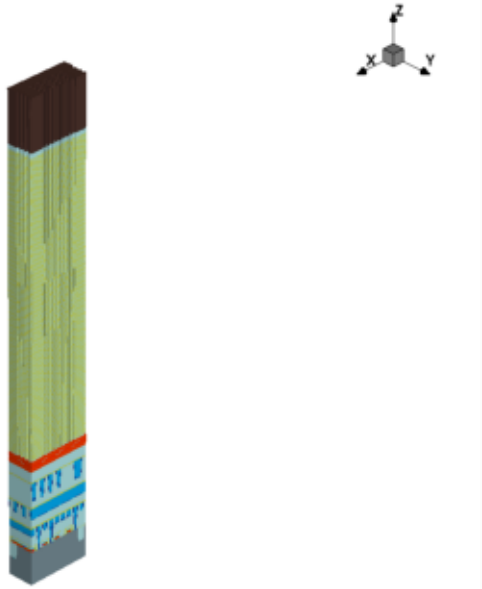

x cut at 0.000 µm

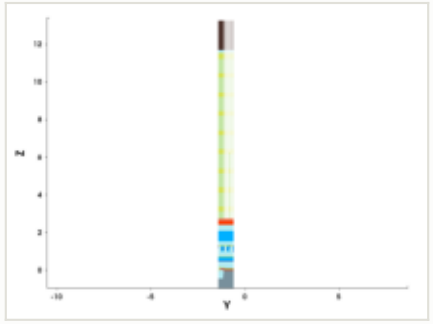

y cut at -1.035 µm

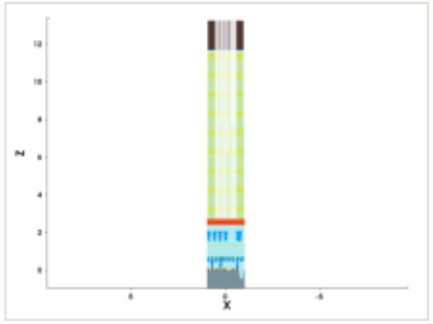

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

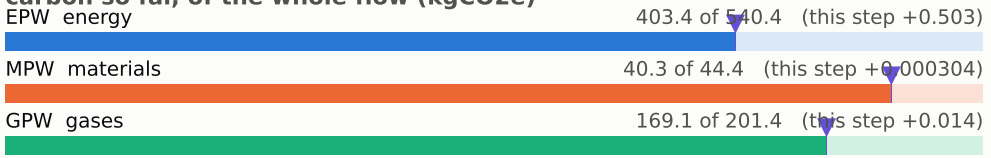


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

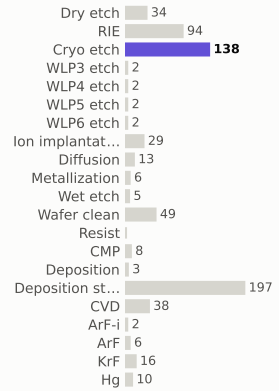

materials deposited (g)

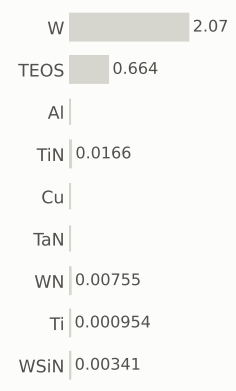

gases emitted (g)



Step #7287.0408: Cryo_etch

etch_noop · Cryo_etch

0.517	613.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

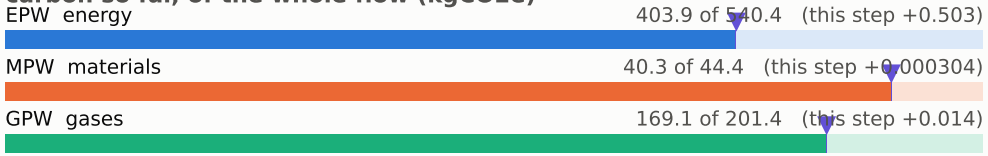


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

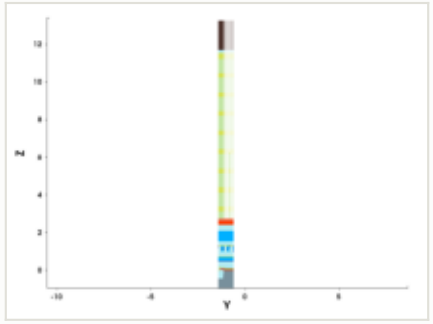


y cut at -1.035 µm

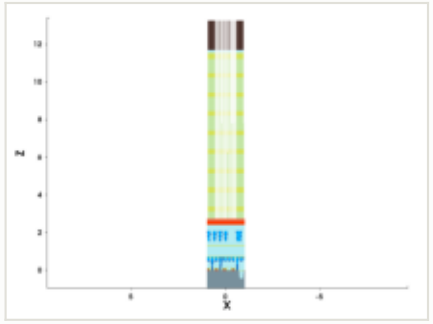


mask for this step

no mask for this step


steps by process area

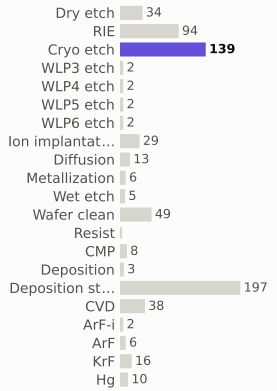

materials deposited (g)

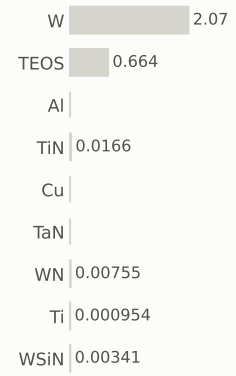

gases emitted (g)



Step #7287.0918: Cryo_etch


etch_noop · Cryo_etch

0.517	613.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



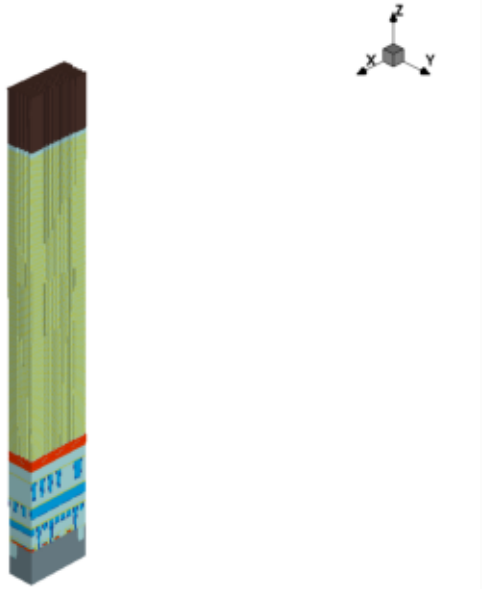


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

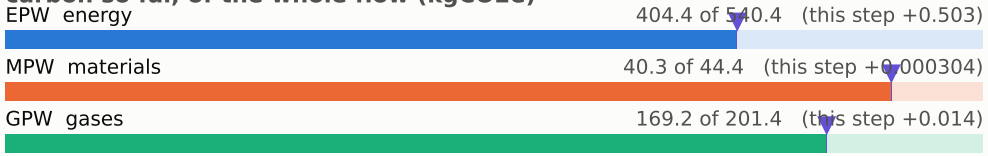


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

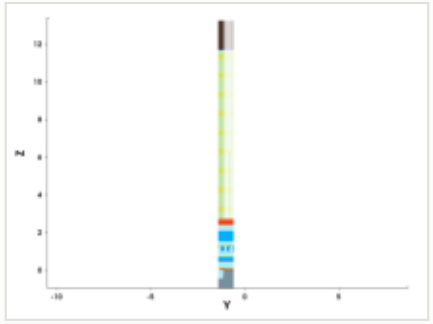


y cut at -1.035 µm

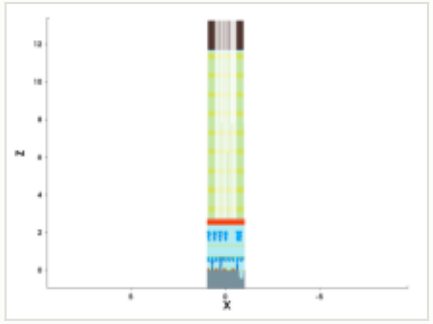


mask for this step

no mask for this step


steps by process area

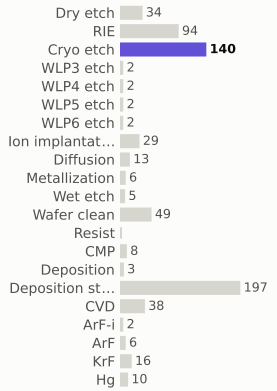

materials deposited (g)

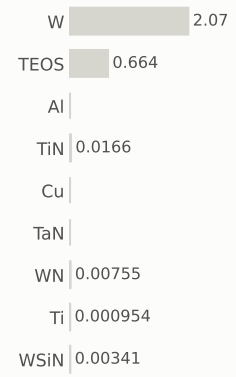

gases emitted (g)



Step #7287.1429: Cryo_etch


etch_noop · Cryo_etch

0.517	614.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




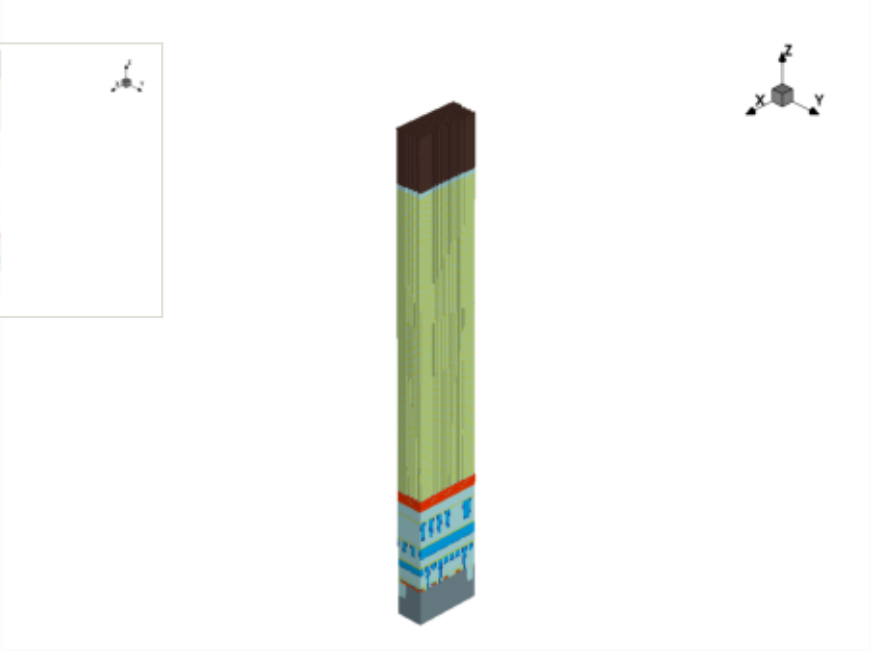

x cut at 0.000 µm

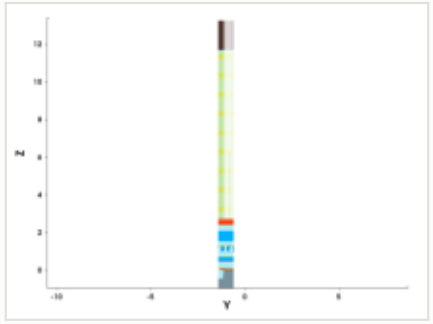

y cut at -1.035 µm

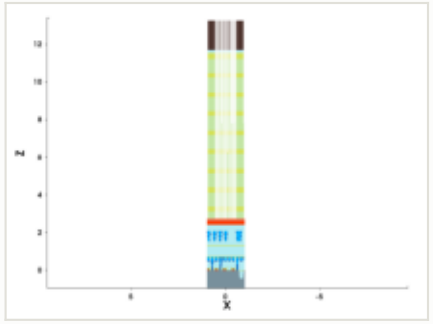

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

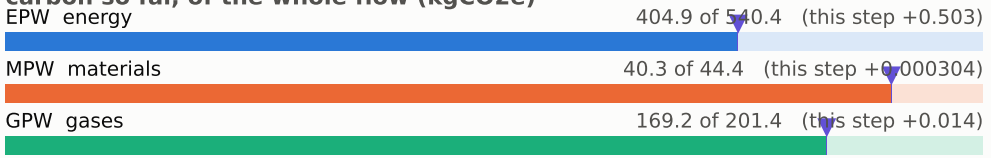


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

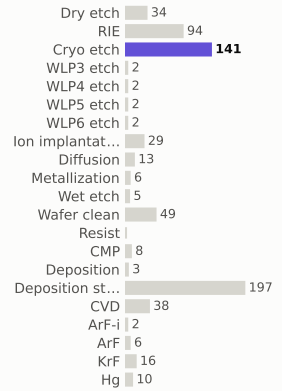

materials deposited (g)

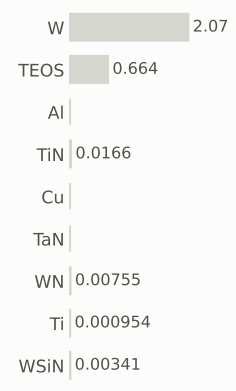

gases emitted (g)



Step #7287.1939: Cryo_etch


etch_noop · Cryo_etch

0.517	614.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




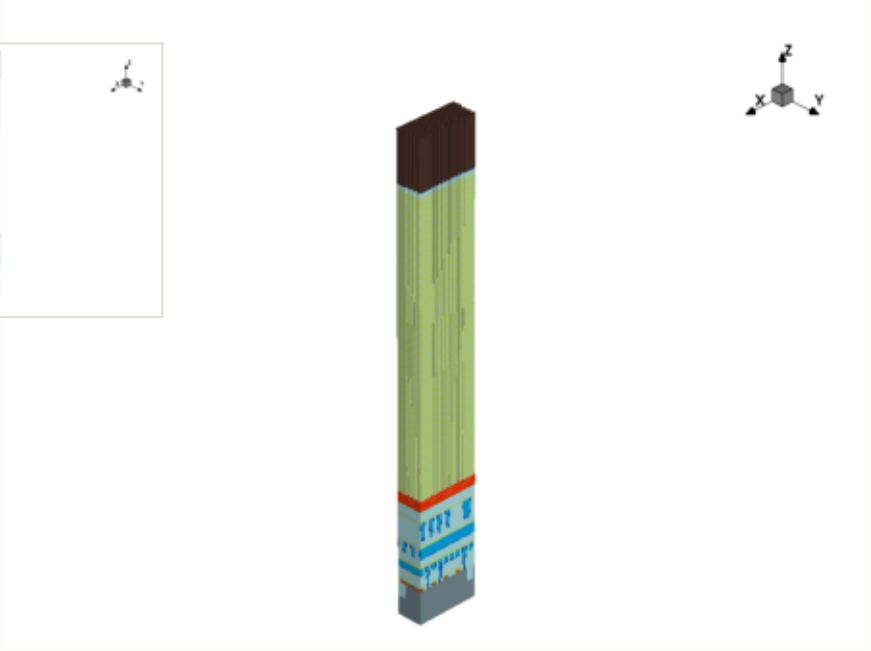

x cut at 0.000 µm

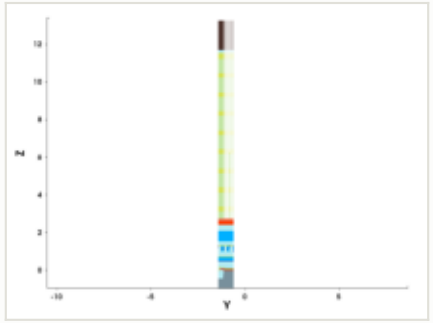

y cut at -1.035 µm

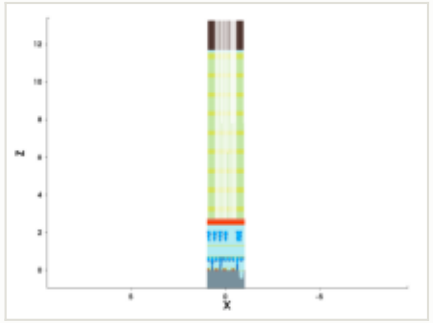

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

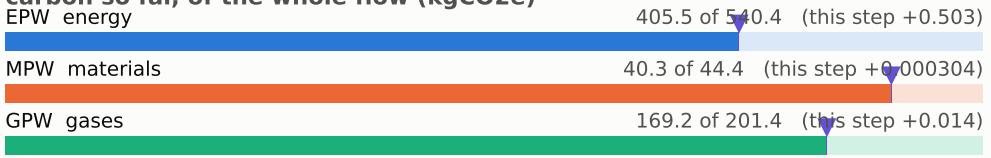


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

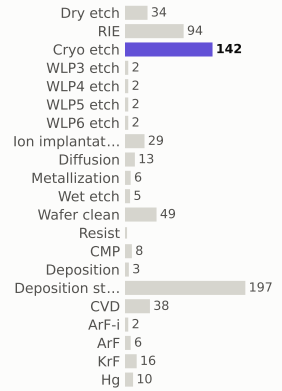

materials deposited (g)

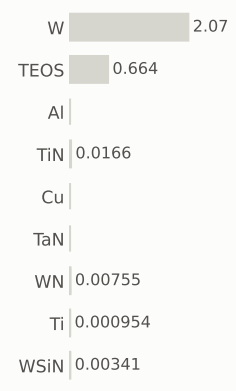

gases emitted (g)



Step #7287.2449: Cryo_etch


etch_noop · Cryo_etch

0.517	615.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



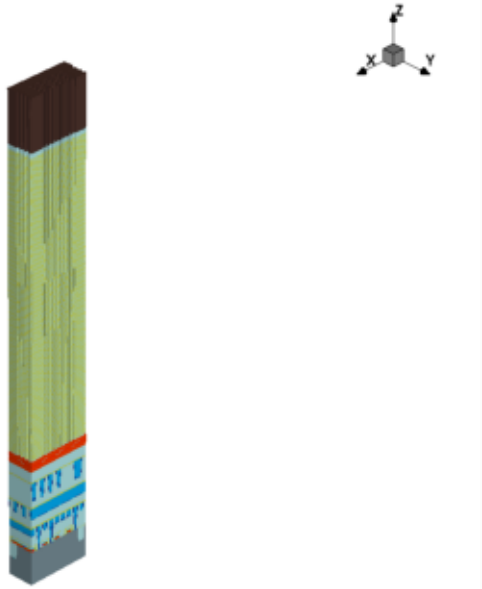


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

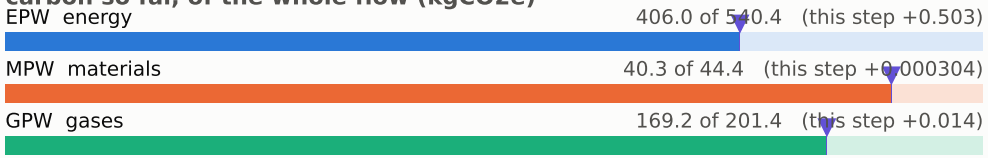


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

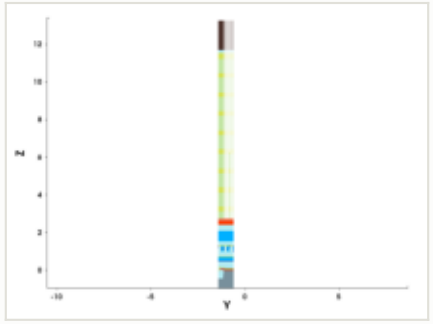


y cut at -1.035 µm

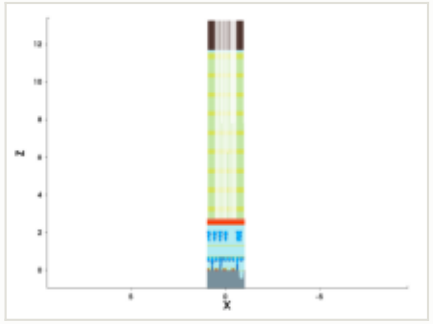


mask for this step

no mask for this step


steps by process area

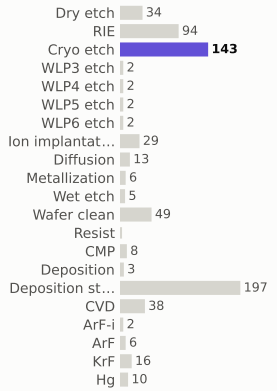

materials deposited (g)

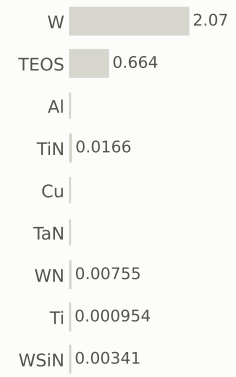

gases emitted (g)



Step #7287.2959: Cryo_etch


etch_noop · Cryo_etch

0.517	615.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




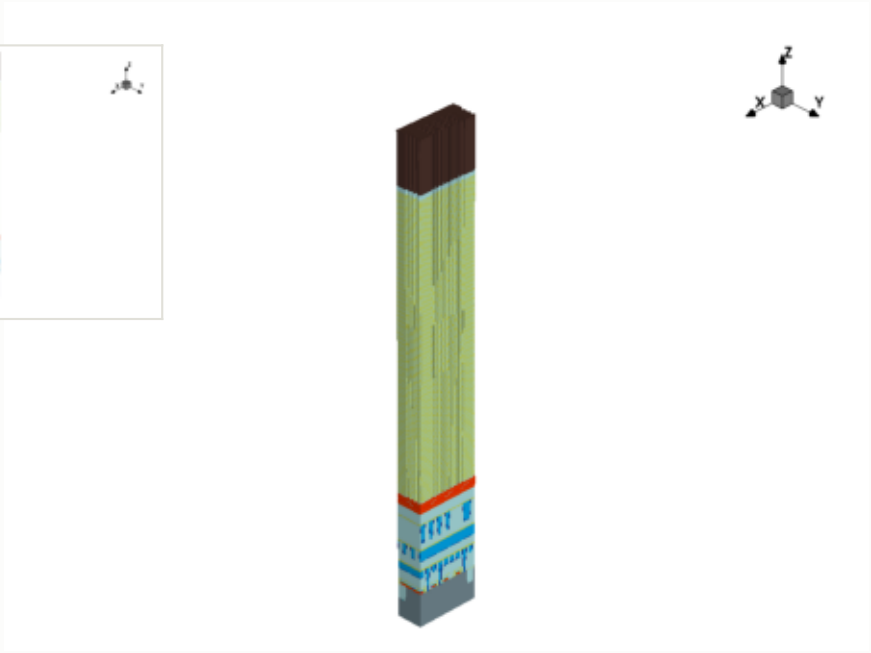

x cut at 0.000 µm

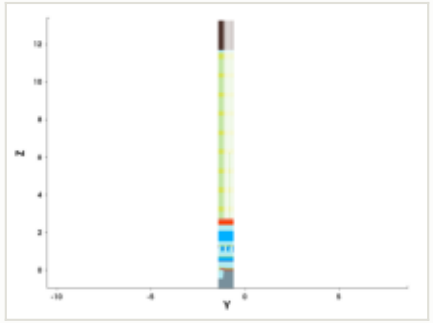

y cut at -1.035 µm

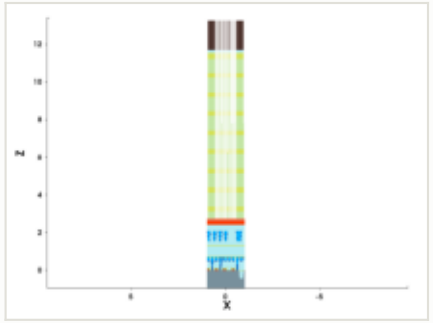

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

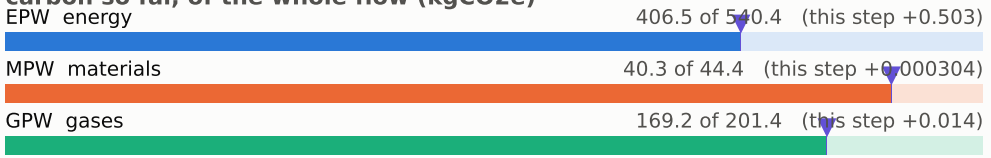


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

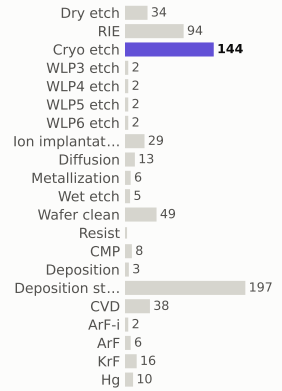

materials deposited (g)

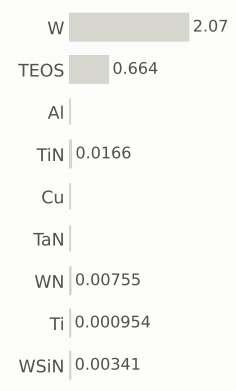

gases emitted (g)



Step #7287.3469: Cryo_etch


etch_noop · Cryo_etch

0.517	616.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



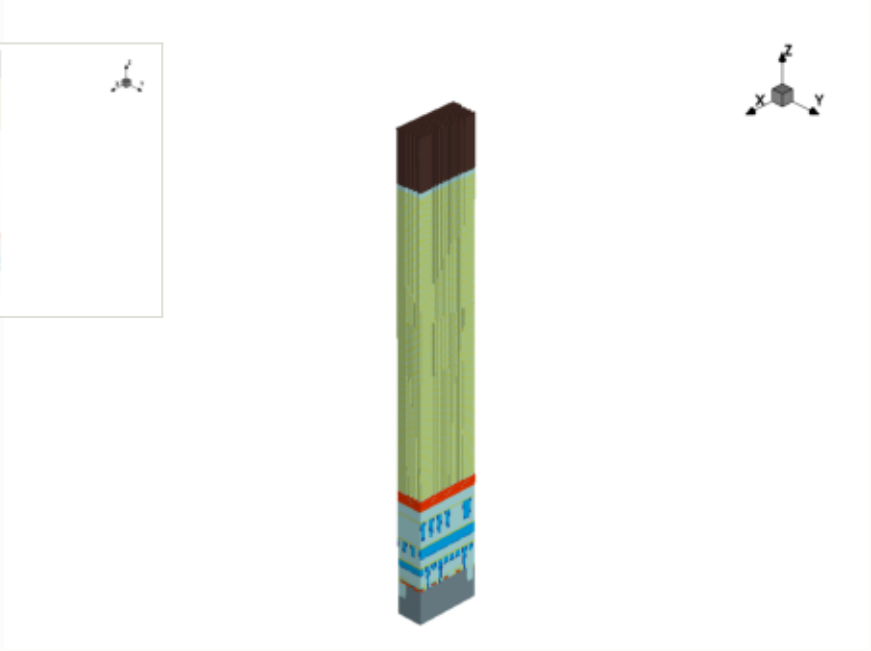


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead


EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

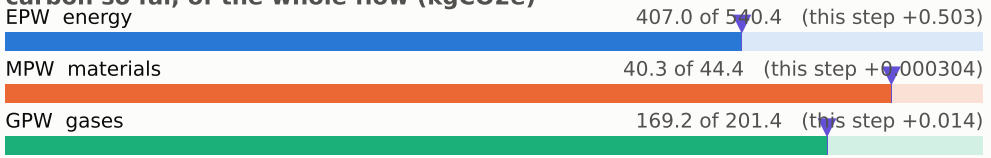


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

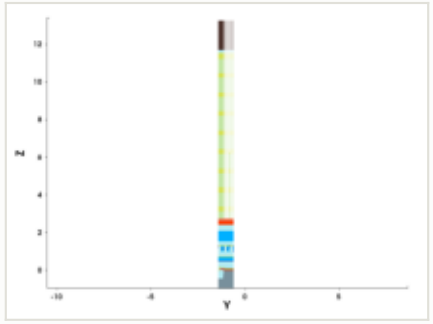


y cut at -1.035 µm

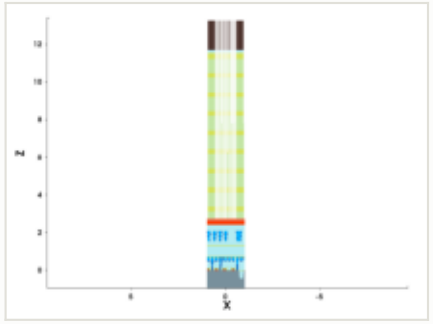


mask for this step

no mask for this step


steps by process area

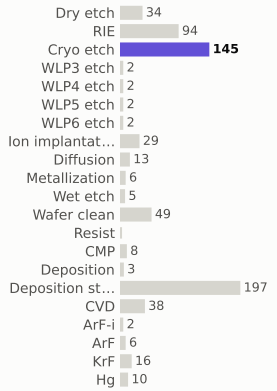

materials deposited (g)

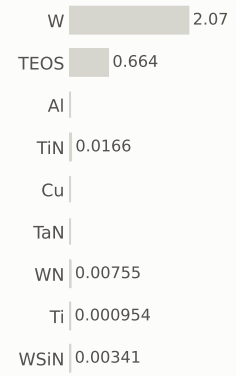

gases emitted (g)



Step #7287.398: Cryo_etch


etch_noop · Cryo_etch

0.517	617.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




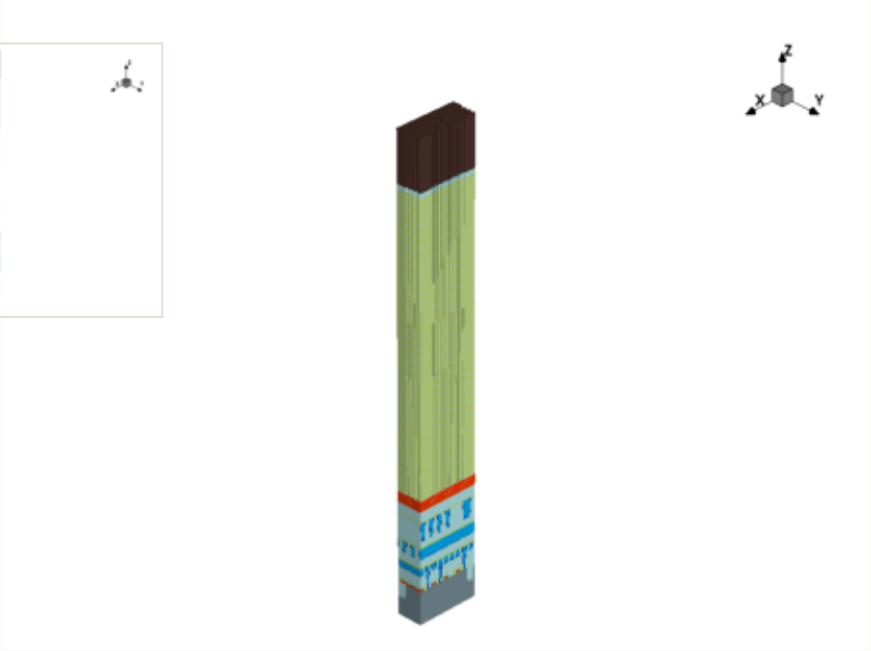

x cut at 0.000 µm

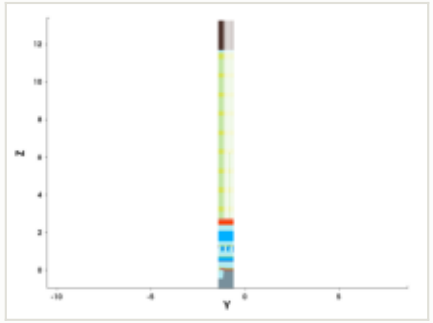

y cut at -1.035 µm

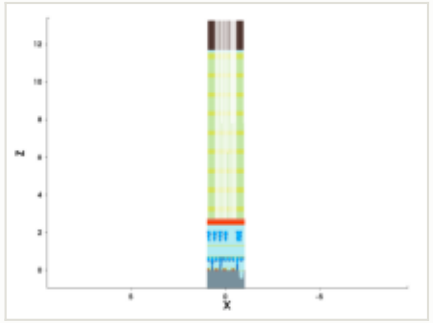

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

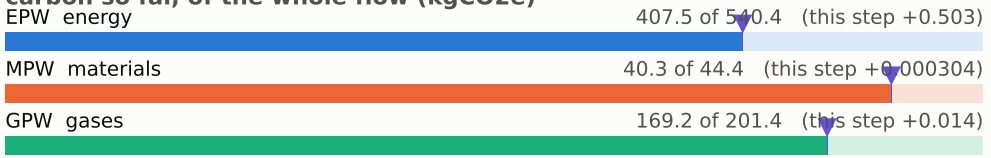


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

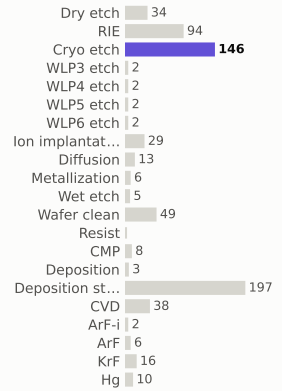

materials deposited (g)

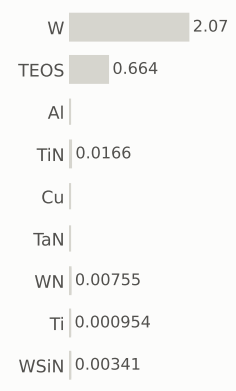

gases emitted (g)



Step #7287.449: Cryo_etch


etch_noop · Cryo_etch

0.517	617.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




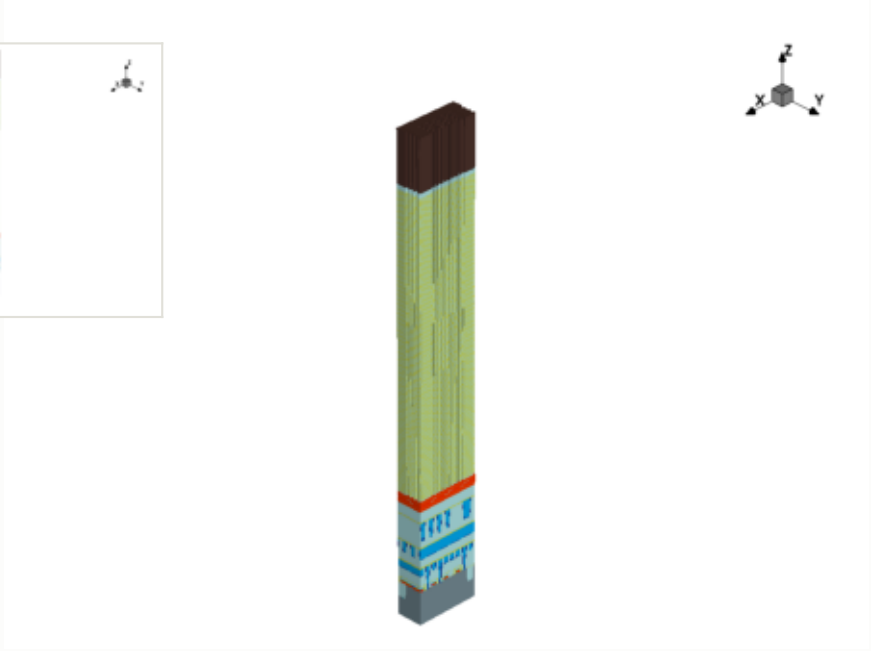

x cut at 0.000 µm

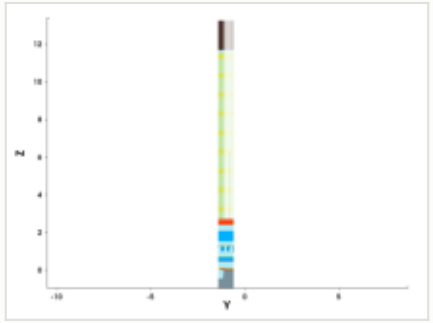

y cut at -1.035 µm

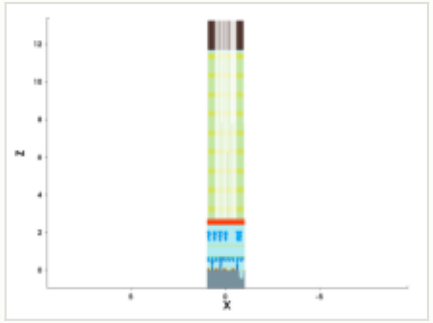

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

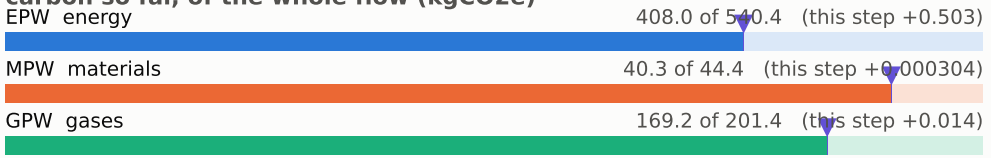


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

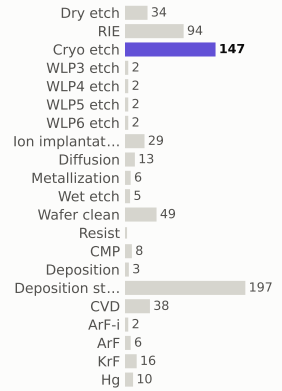

materials deposited (g)

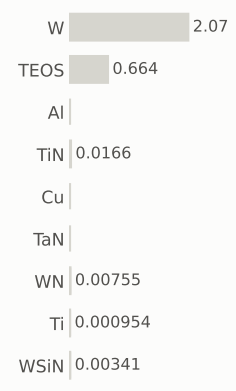

gases emitted (g)



Step #7287.5: Cryo_etch


etch_noop · Cryo_etch

0.517	618.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




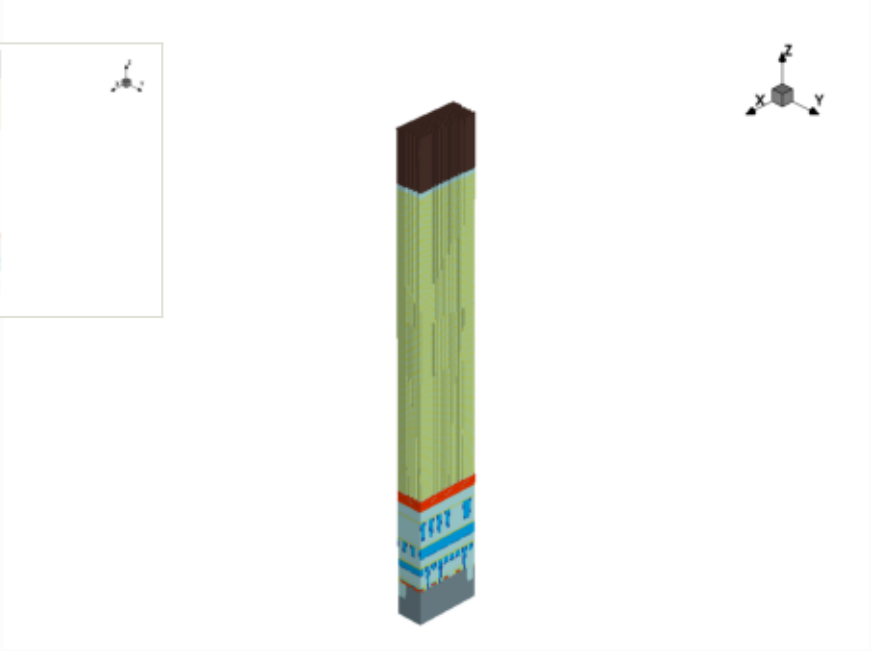

x cut at 0.000 µm

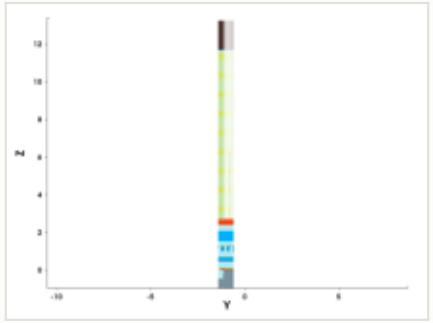

y cut at -1.035 µm

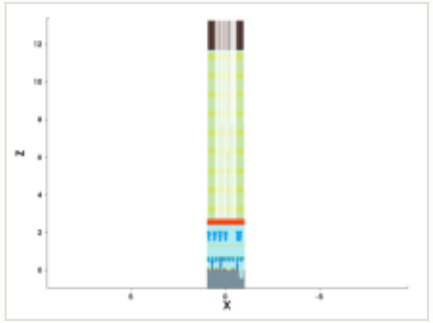

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

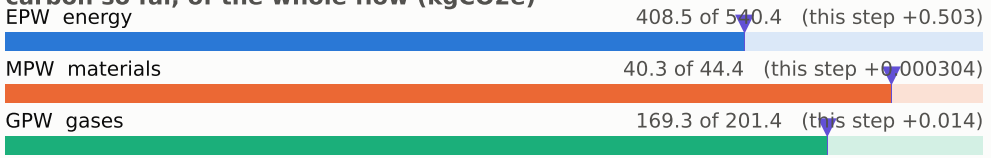


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

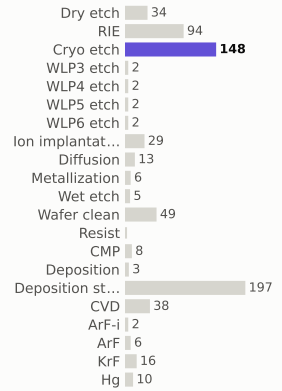

materials deposited (g)

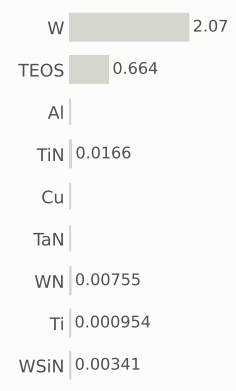

gases emitted (g)



Step #7287.551: Cryo_etch


etch_noop · Cryo_etch

0.517	618.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



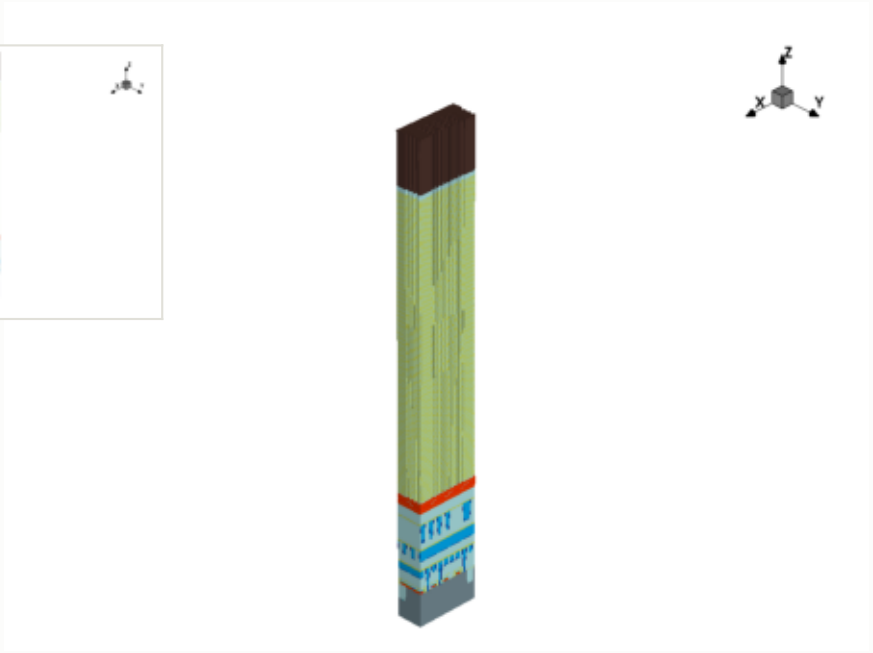


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead


EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

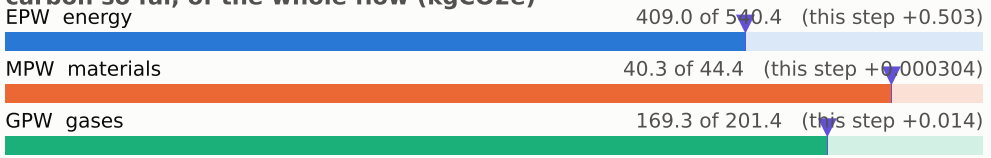


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

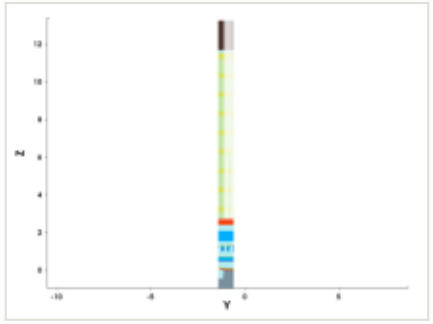


y cut at -1.035 µm

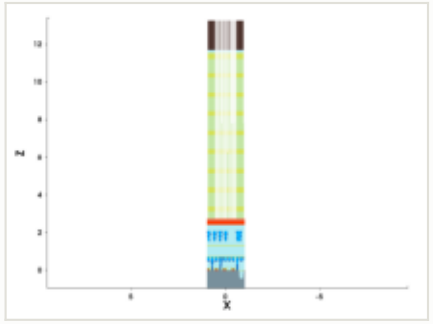


mask for this step

no mask for this step


steps by process area

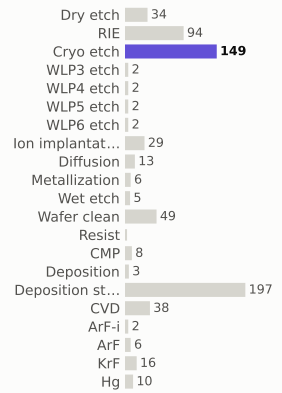

materials deposited (g)

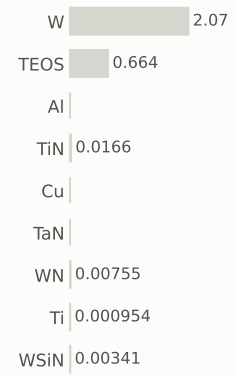

gases emitted (g)



Step #7287.602: Cryo_etch


etch_noop · Cryo_etch

0.517	619.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




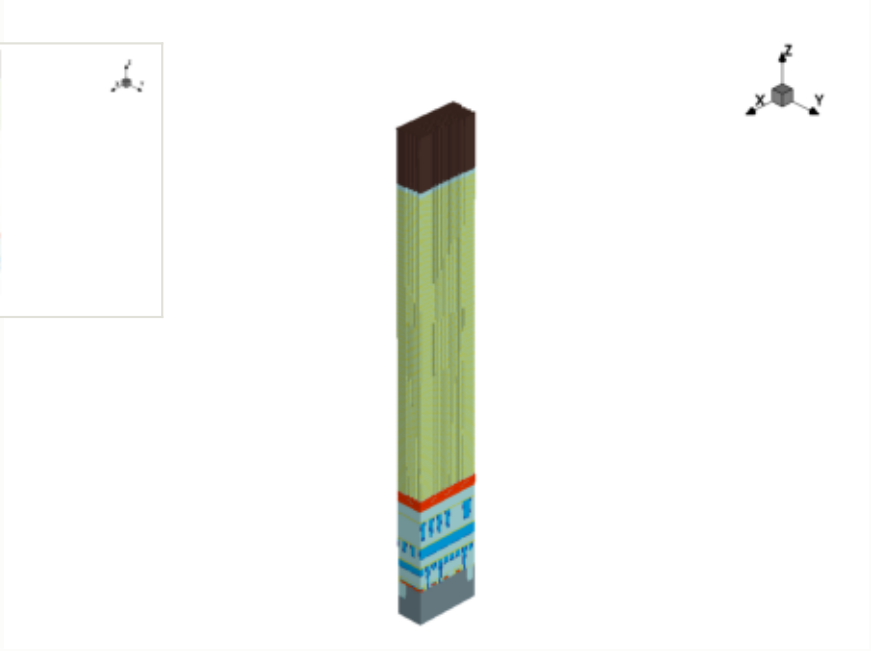

x cut at 0.000 µm

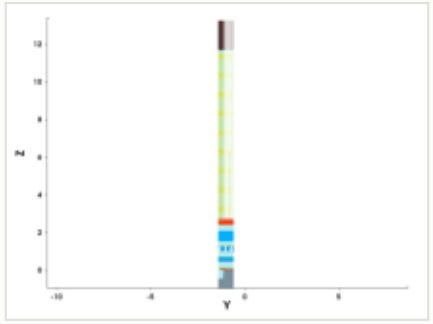

y cut at -1.035 µm

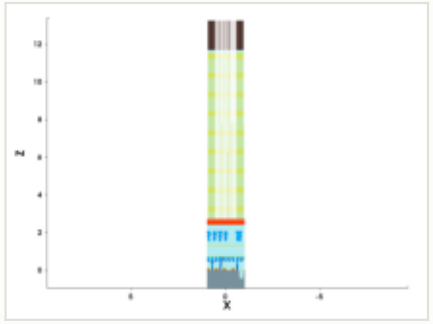

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

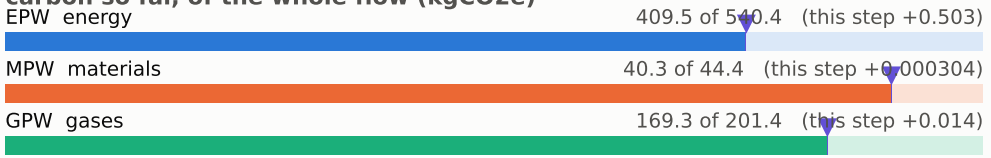


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

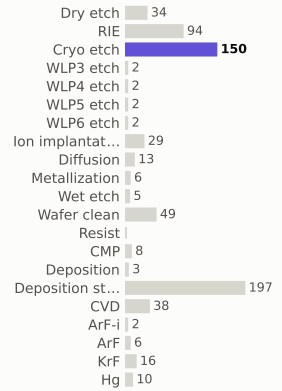

materials deposited (g)

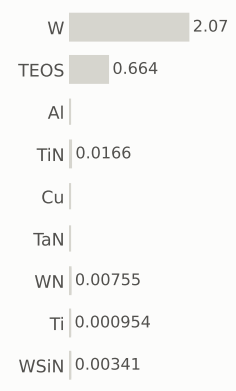

gases emitted (g)



Step #7287.6531: Cryo_etch


etch_noop · Cryo_etch

0.517	619.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



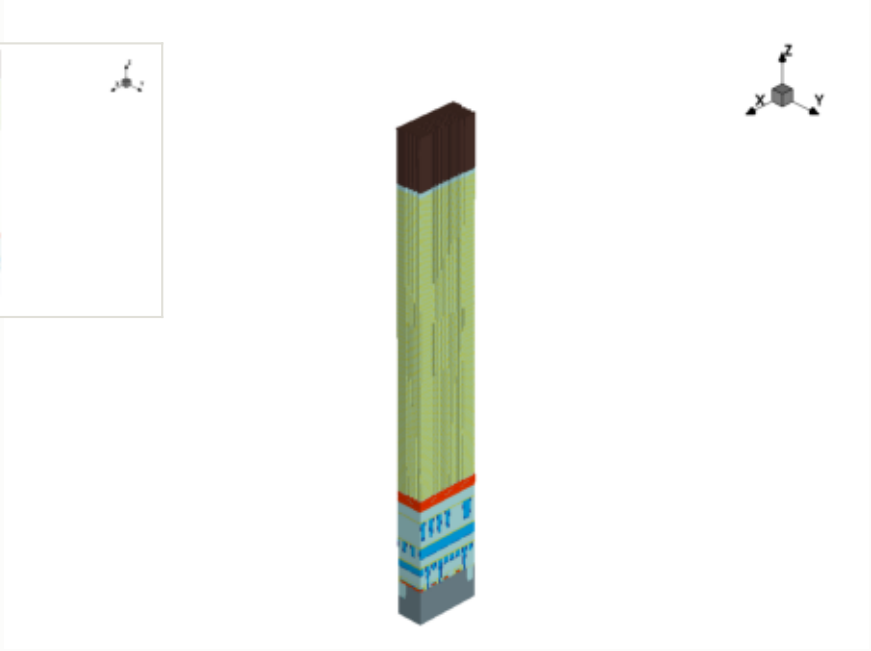


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

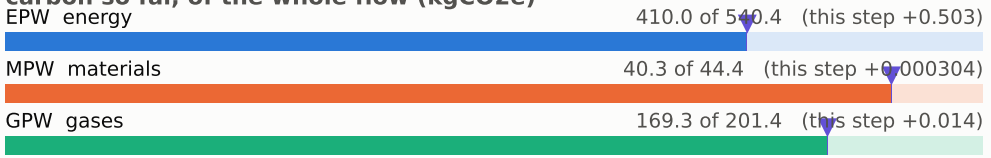


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

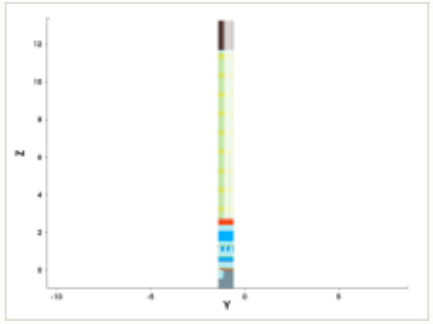


y cut at -1.035 µm

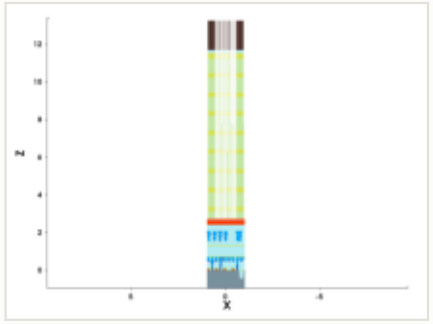


mask for this step

no mask for this step


steps by process area

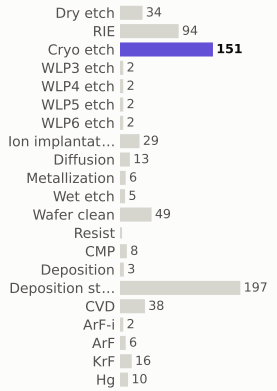

materials deposited (g)

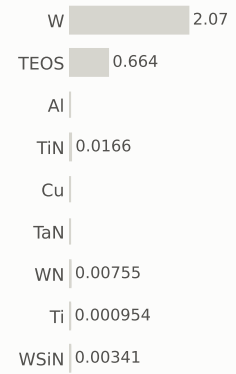

gases emitted (g)



Step #7287.7041: Cryo_etch


etch_noop · Cryo_etch

0.517	620.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



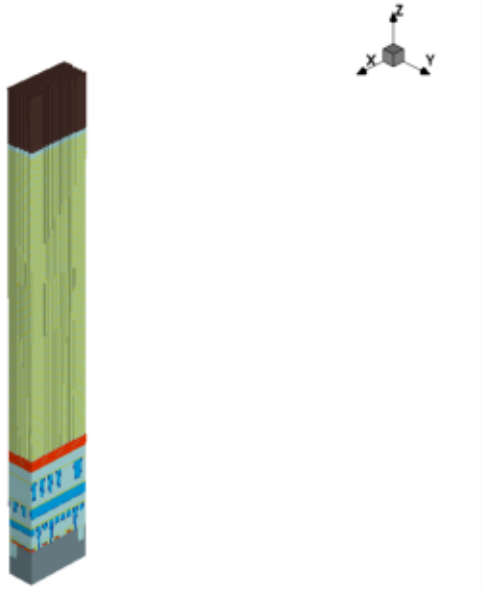


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

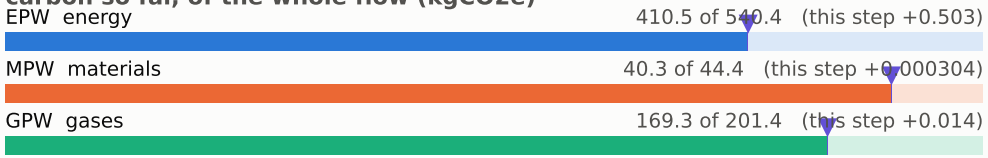


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

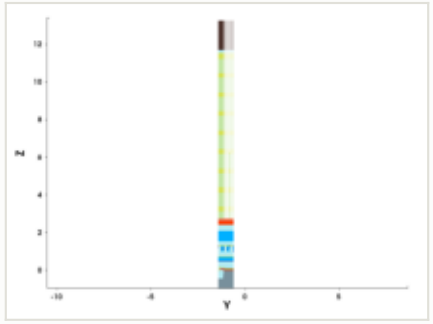


y cut at -1.035 µm

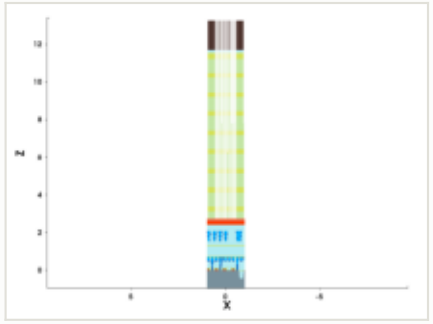


mask for this step

no mask for this step


steps by process area

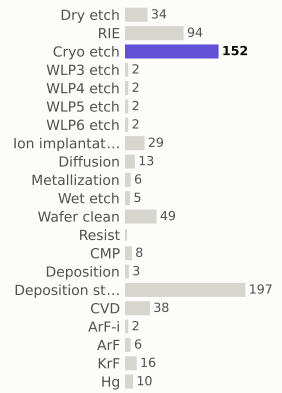

materials deposited (g)

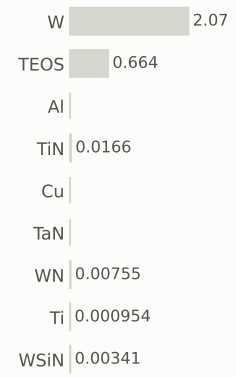

gases emitted (g)



Step #7287.7551: Cryo_etch


etch_noop · Cryo_etch

0.517	620.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




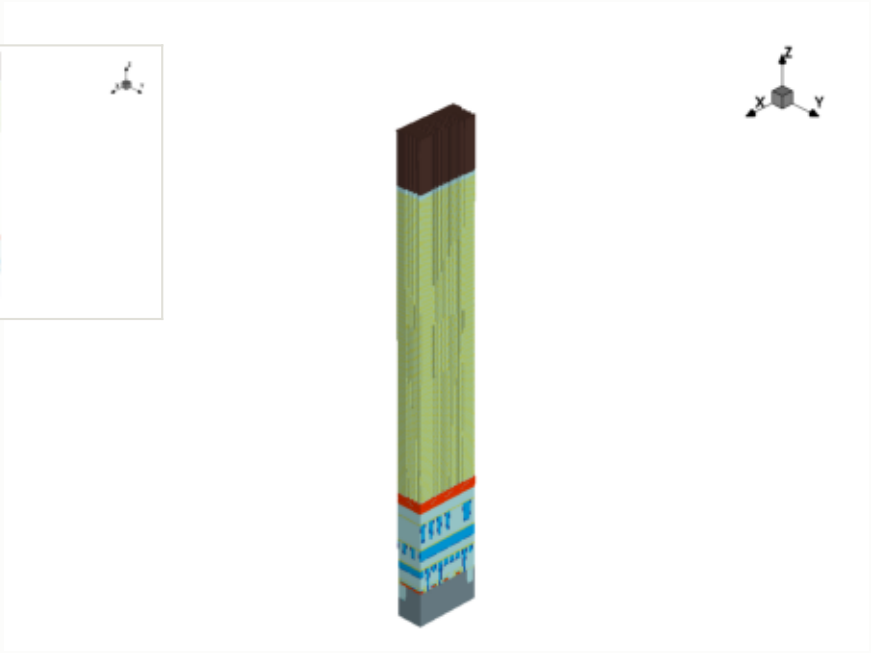

x cut at 0.000 µm

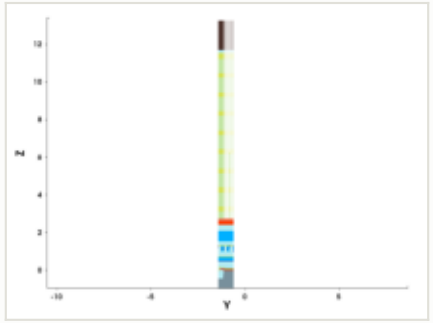

y cut at -1.035 µm

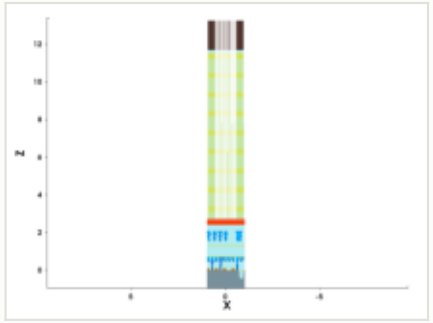

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

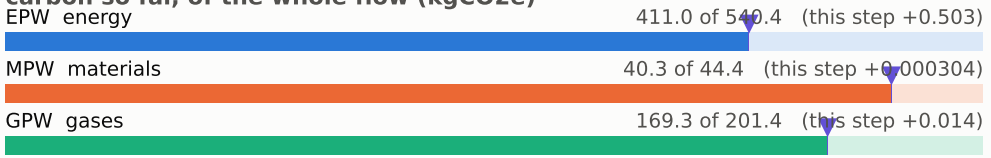


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

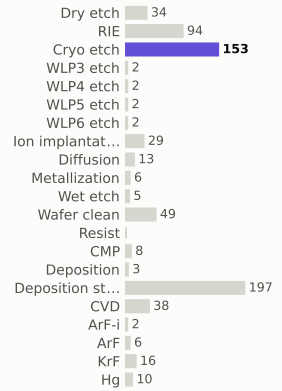

materials deposited (g)

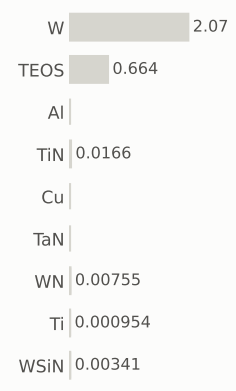

gases emitted (g)



Step #7287.8061: Cryo_etch


etch_noop · Cryo_etch

0.517	621.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



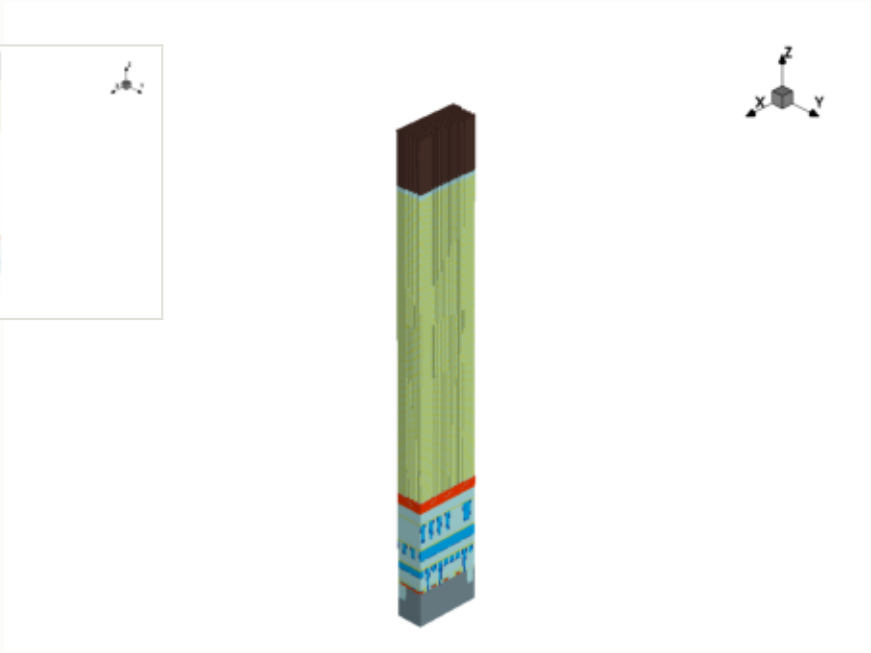


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

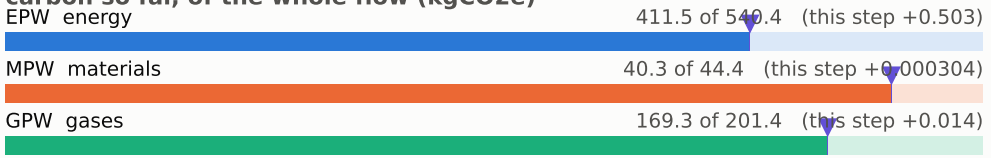


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

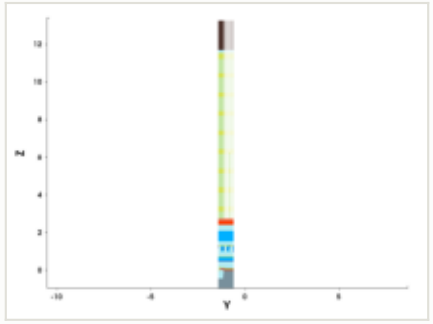


y cut at -1.035 µm

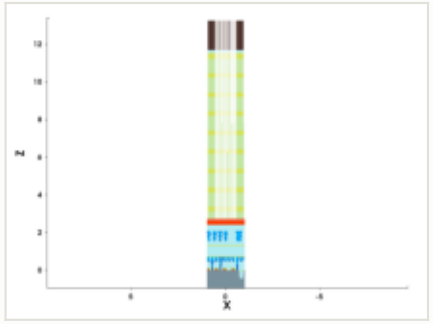


mask for this step

no mask for this step


steps by process area

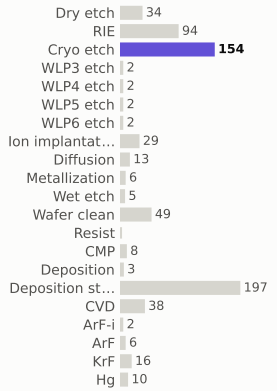

materials deposited (g)

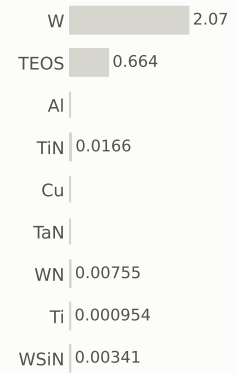

gases emitted (g)



Step #7287.8571: Cryo_etch


etch_noop · Cryo_etch

0.517	621.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



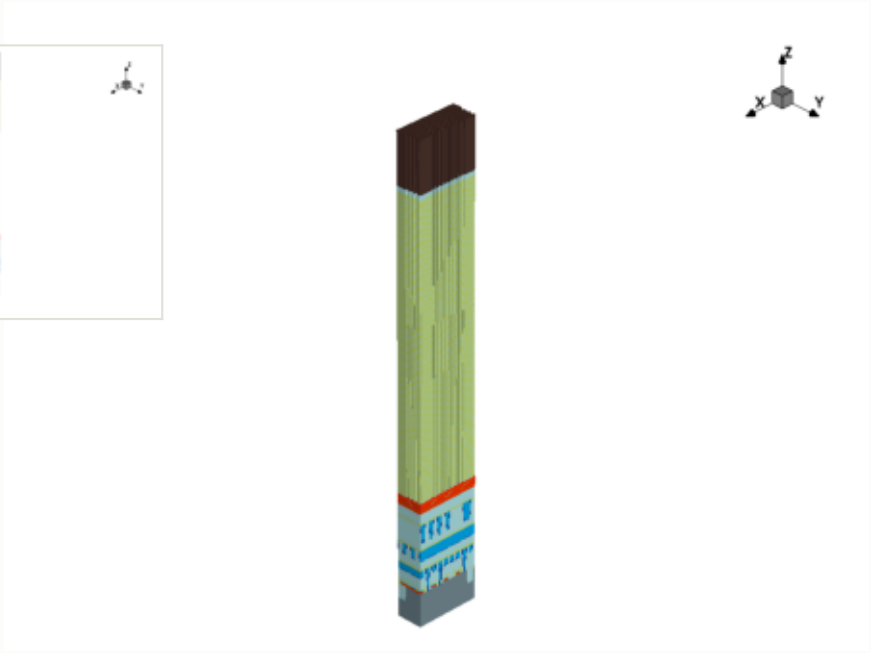


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

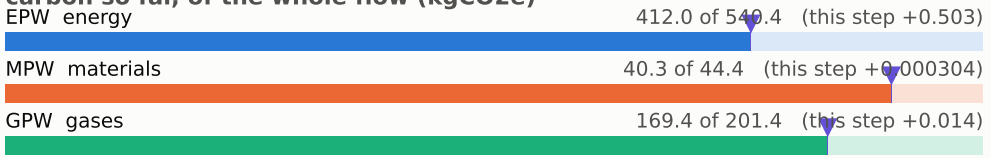


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

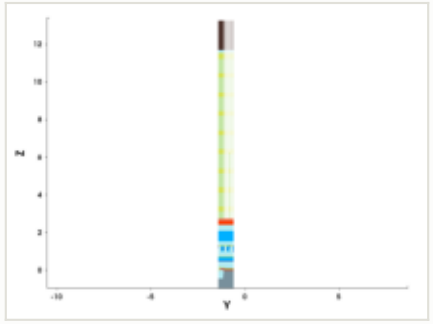


y cut at -1.035 µm

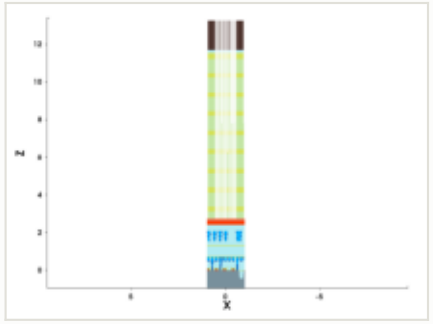


mask for this step

no mask for this step


steps by process area

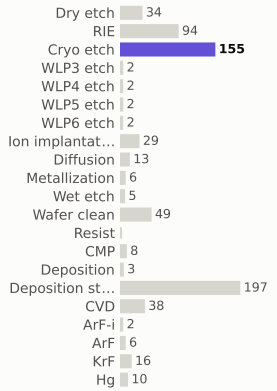

materials deposited (g)

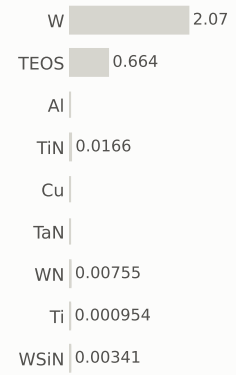

gases emitted (g)



Step #7287.9082: Cryo_etch


etch_noop · Cryo_etch

0.517	622.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



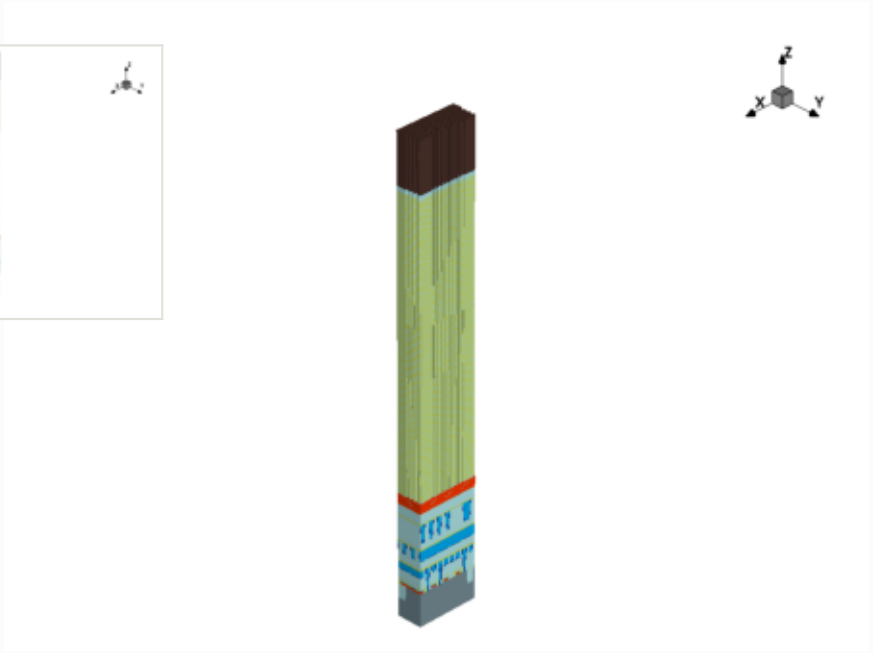


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

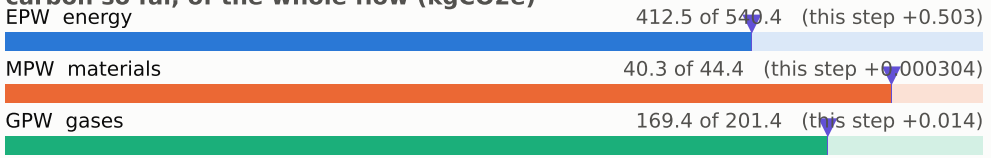


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

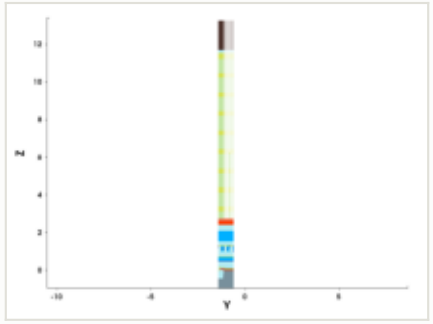


y cut at -1.035 µm

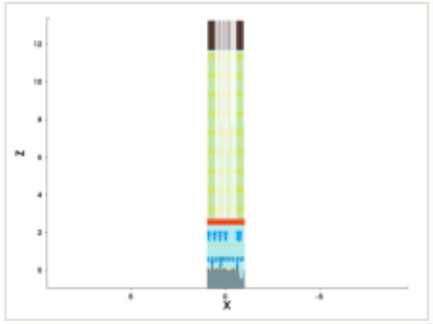


mask for this step

no mask for this step


steps by process area

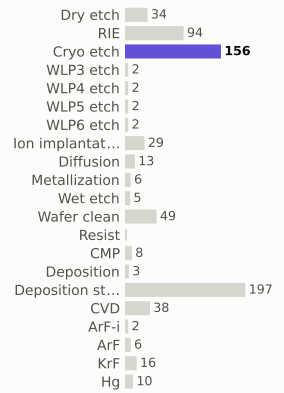

materials deposited (g)

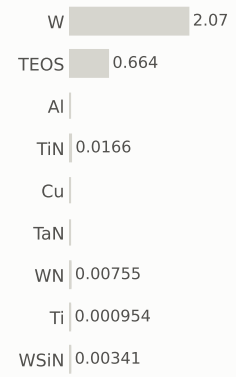

gases emitted (g)



Step #7287.9592: Cryo_etch


etch_noop · Cryo_etch

0.517	622.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



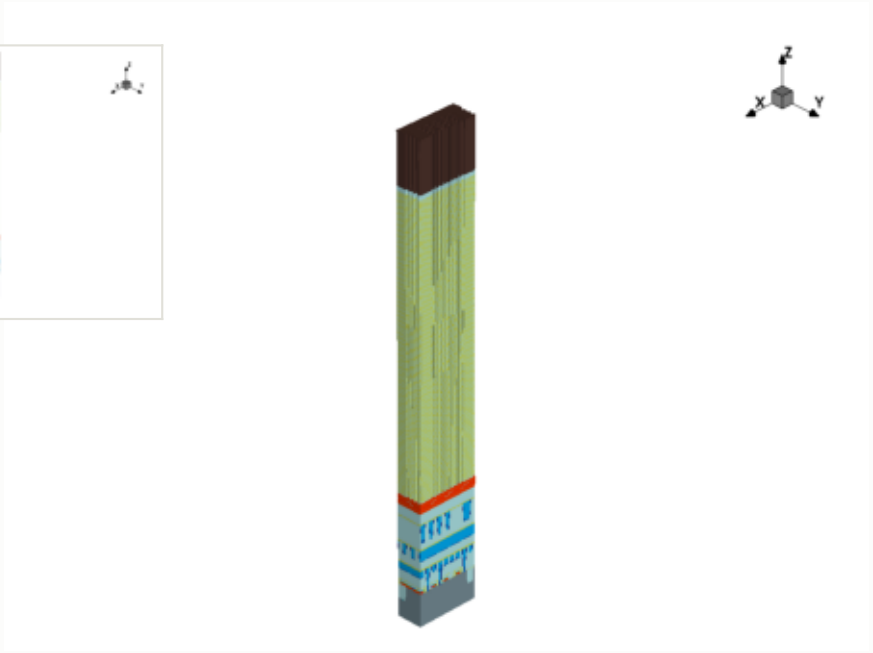


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

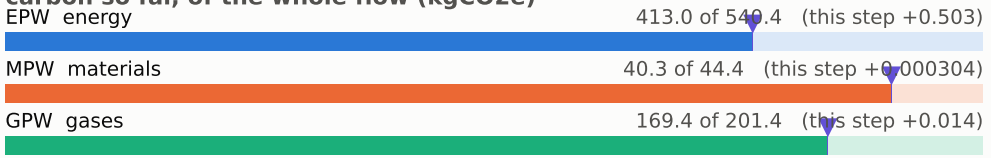


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

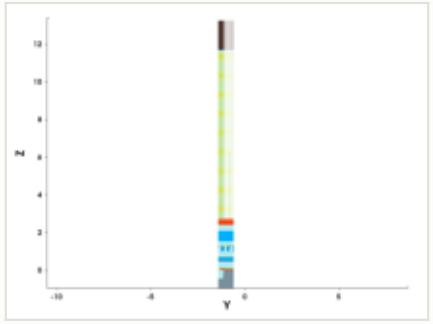


y cut at -1.035 µm

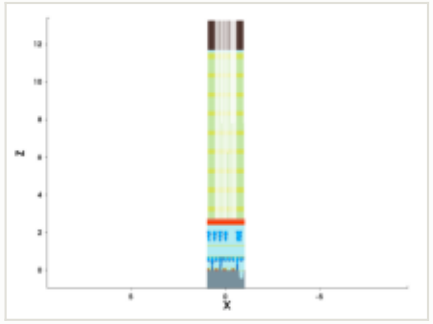


mask for this step

no mask for this step


steps by process area

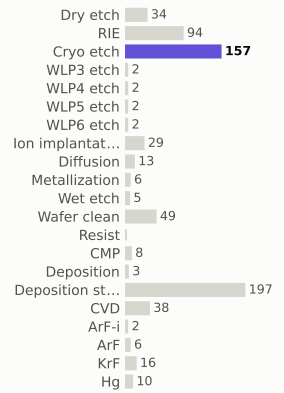

materials deposited (g)

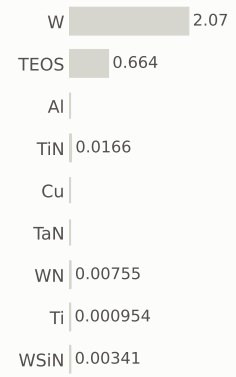

gases emitted (g)



Step #7288.0102: Cryo_etch


etch_noop · Cryo_etch

0.517	623.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



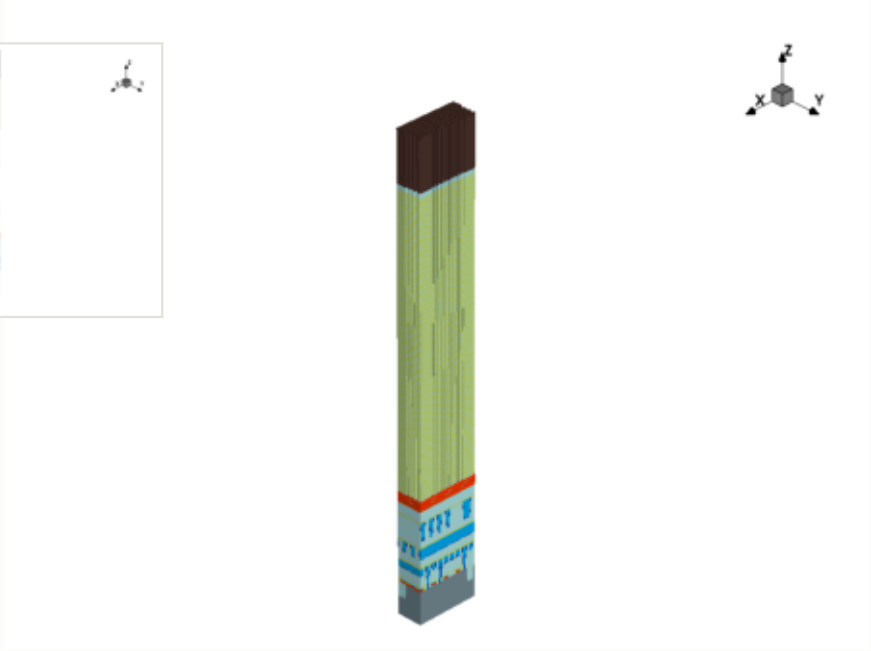


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

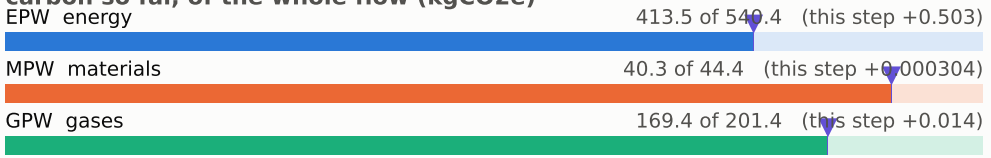


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

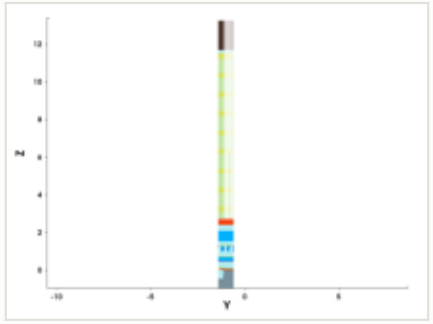


y cut at -1.035 µm

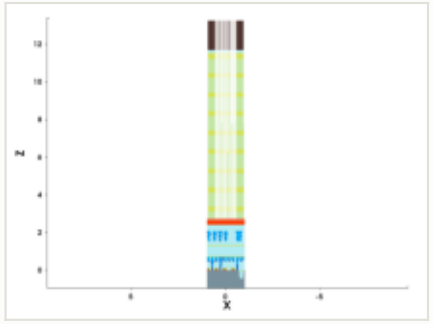


mask for this step

no mask for this step


steps by process area

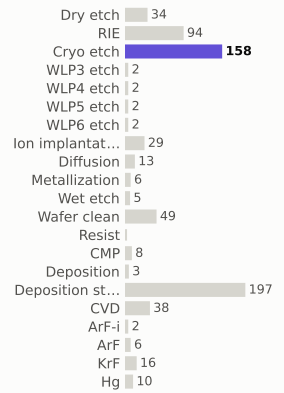

materials deposited (g)

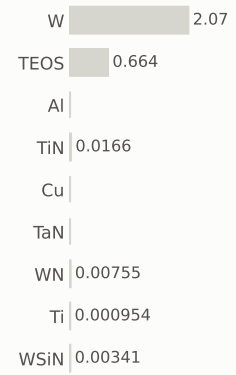

gases emitted (g)



Step #7288.0612: Cryo_etch


etch_noop · Cryo_etch

0.517	623.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



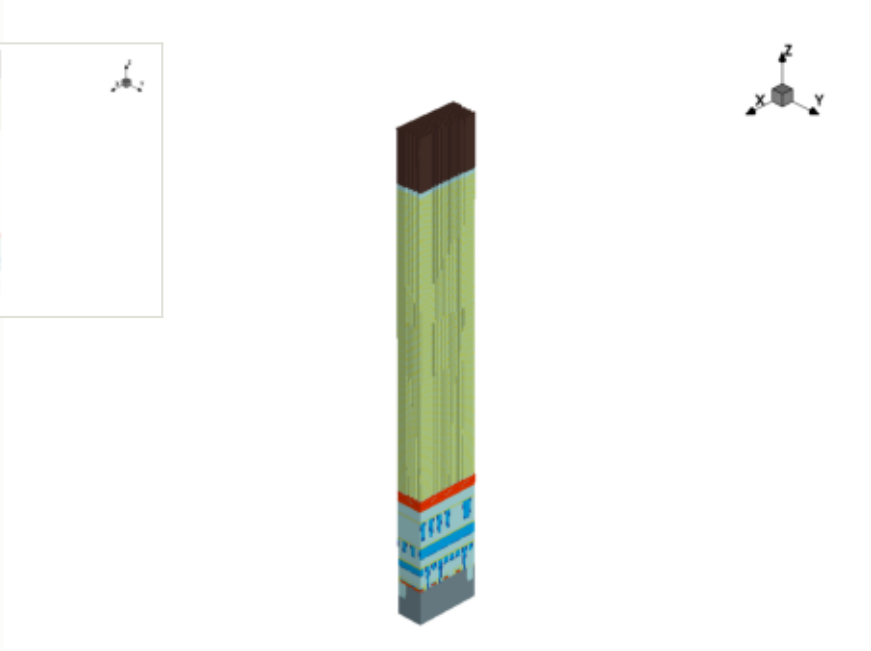


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

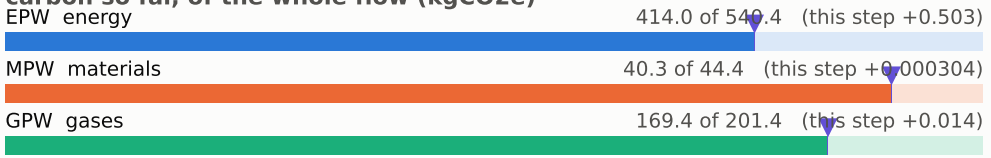


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

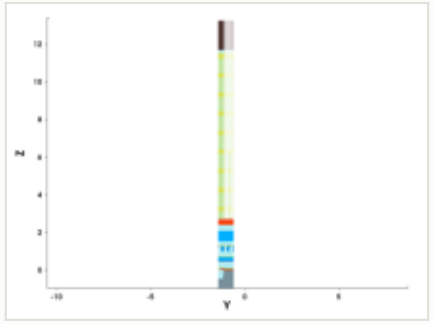


y cut at -1.035 µm

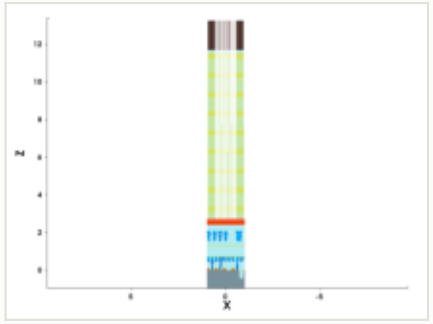


mask for this step

no mask for this step


steps by process area

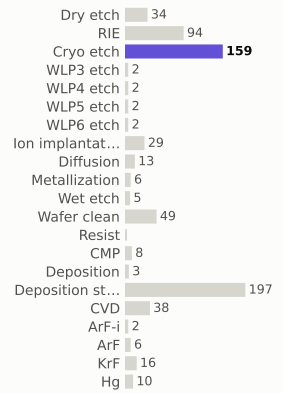

materials deposited (g)

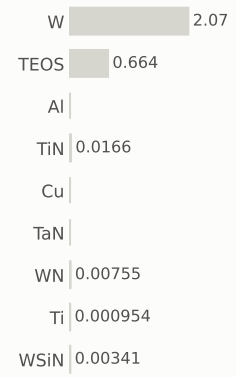

gases emitted (g)



Step #7288.1122: Cryo_etch


etch_noop · Cryo_etch

0.517	624.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




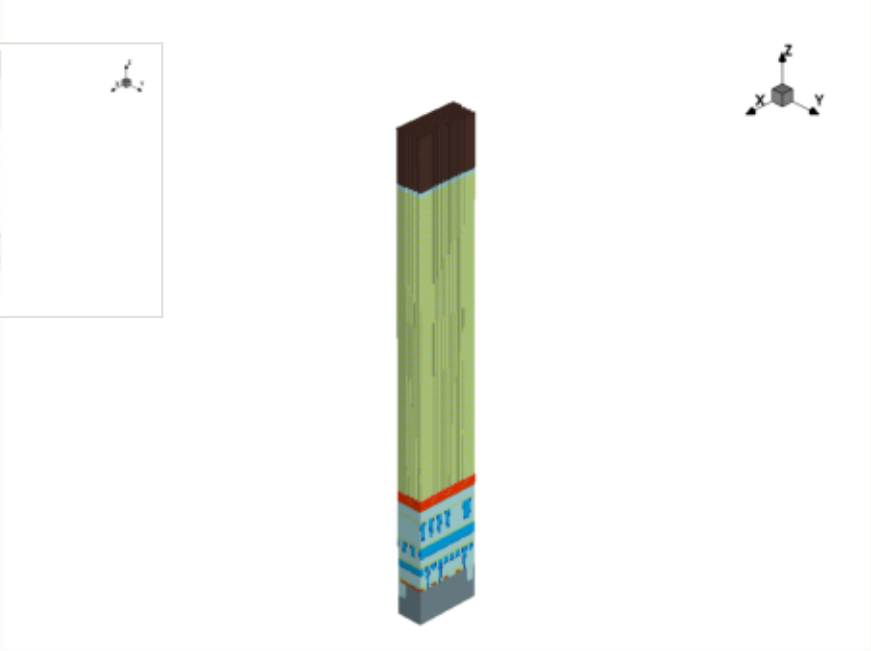

x cut at 0.000 µm

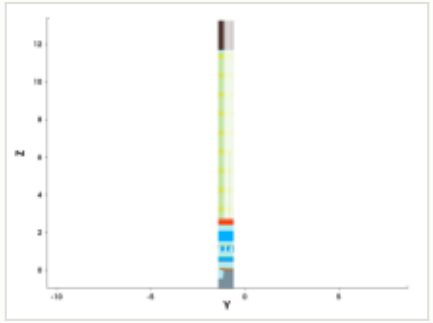

y cut at -1.035 µm

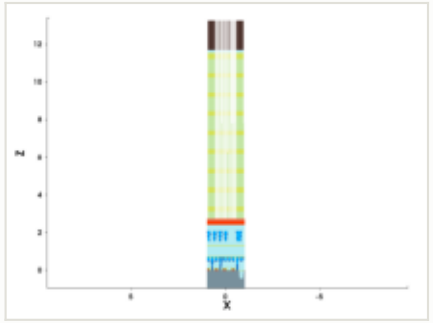

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

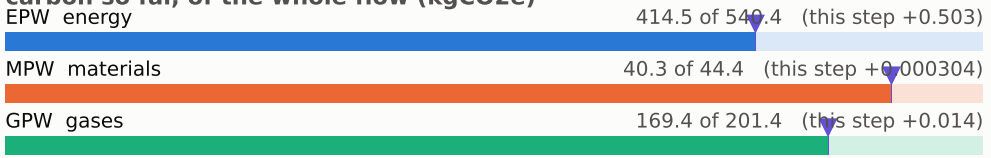


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

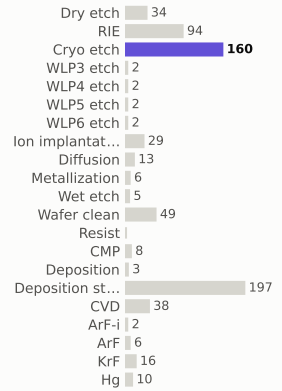

materials deposited (g)

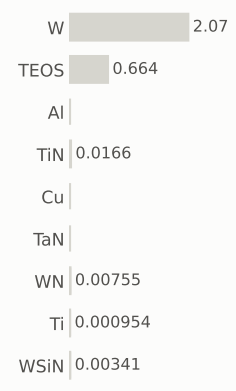

gases emitted (g)



Step #7288.1633: Cryo_etch


etch_noop · Cryo_etch

0.517	624.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




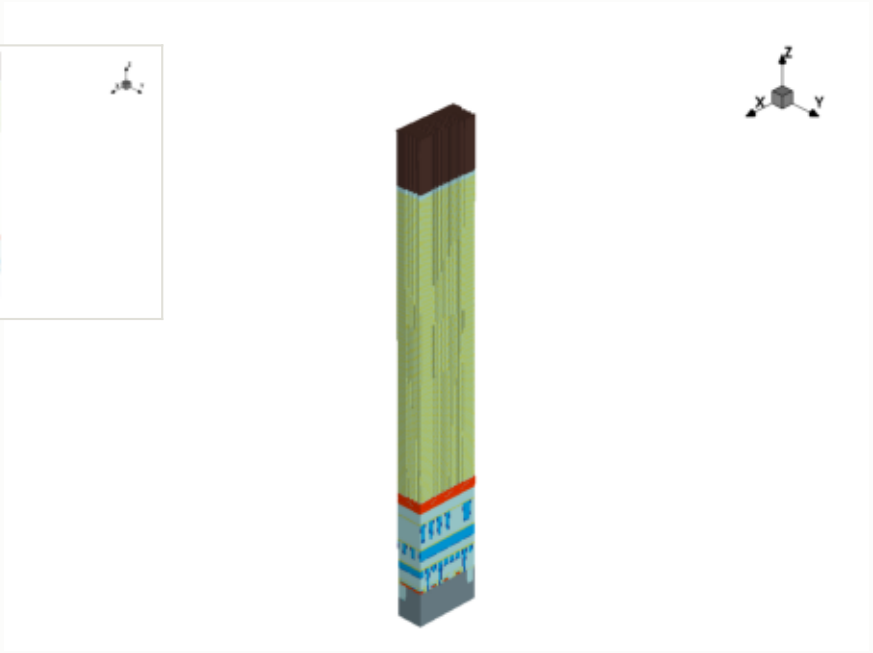

x cut at 0.000 µm

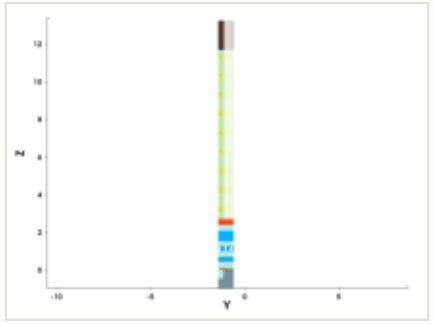

y cut at -1.035 µm

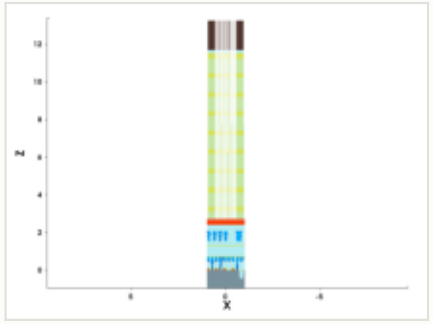

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

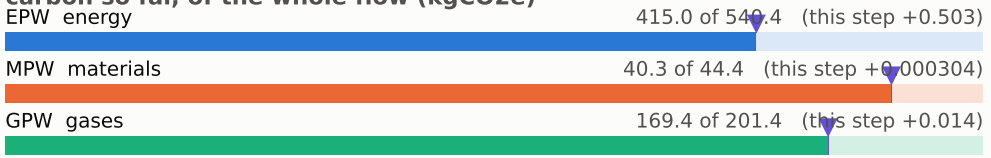


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

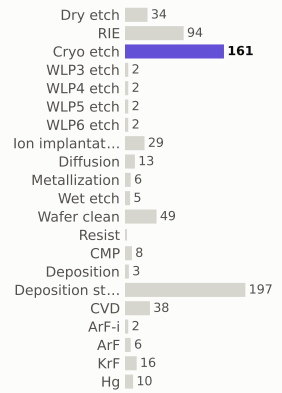

materials deposited (g)

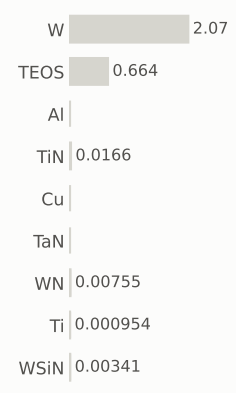

gases emitted (g)



Step #7288.2143: Cryo_etch


etch_noop · Cryo_etch

0.517	625.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



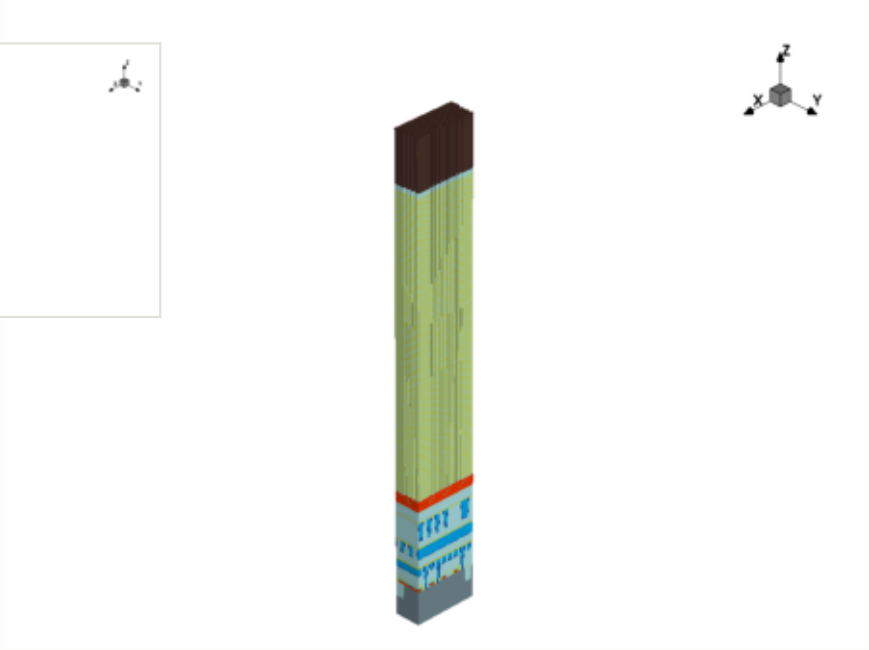


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

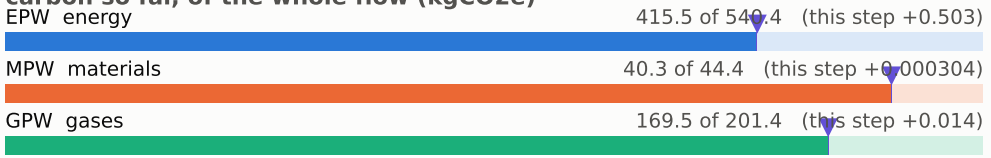


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

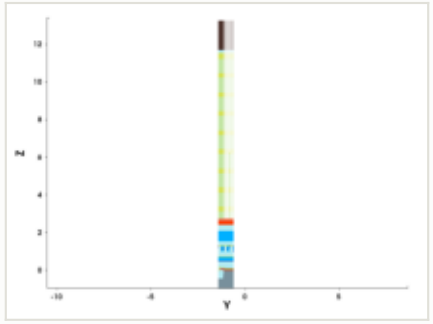


y cut at -1.035 µm

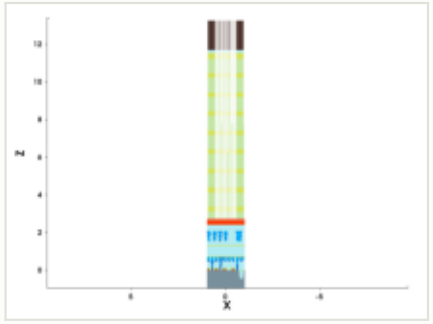


mask for this step

no mask for this step


steps by process area

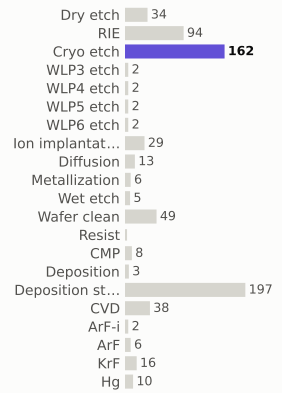

materials deposited (g)

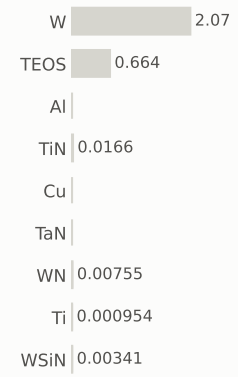

gases emitted (g)



Step #7288.2653: Cryo_etch


etch_noop · Cryo_etch

0.517	625.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




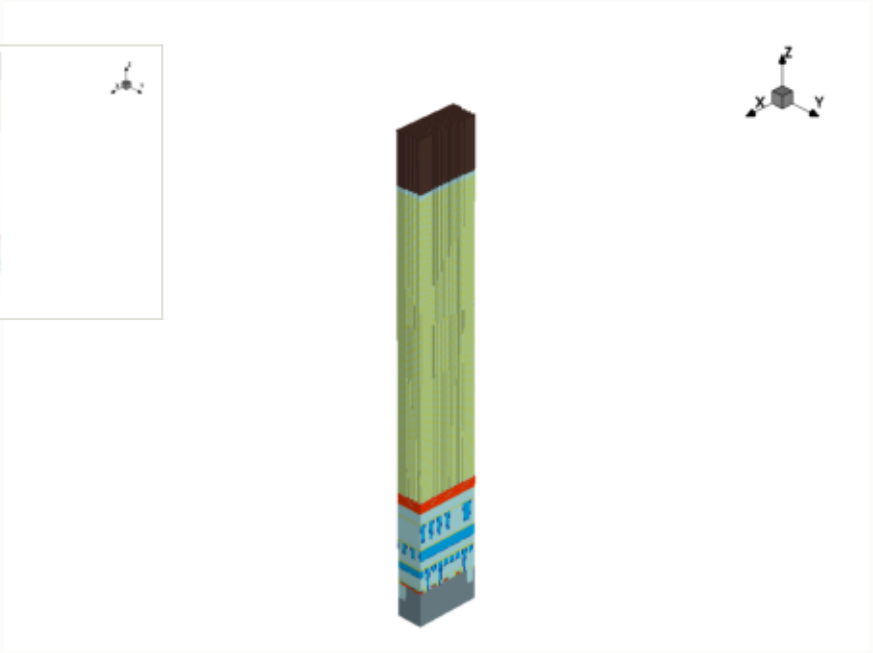

x cut at 0.000 µm

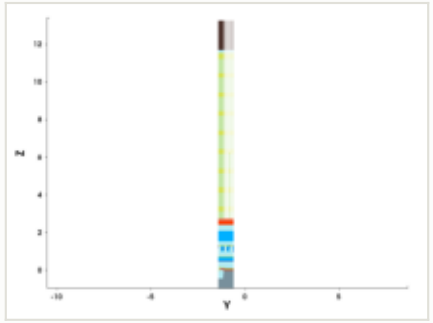

y cut at -1.035 µm

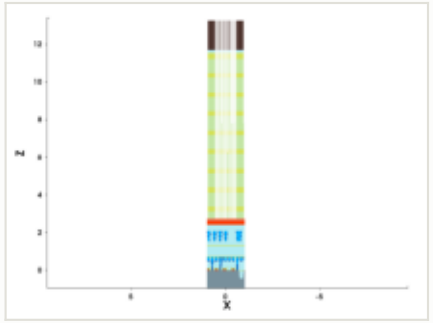

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

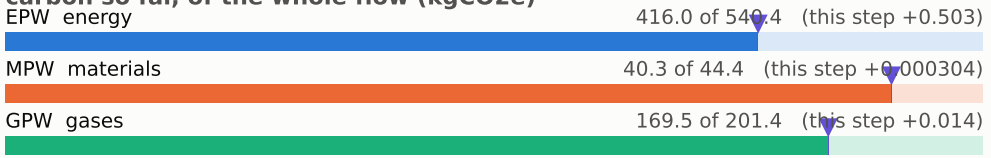


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

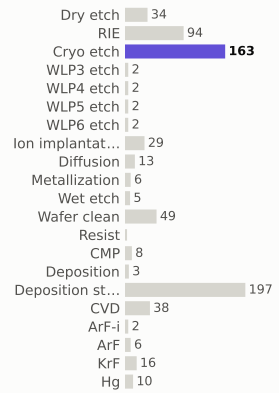

materials deposited (g)

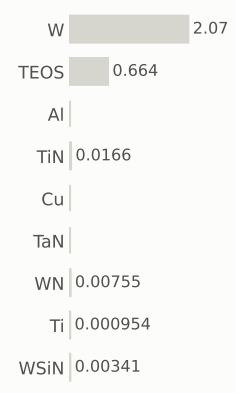

gases emitted (g)



Step #7288.3163: Cryo_etch


etch_noop · Cryo_etch

0.517	626.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



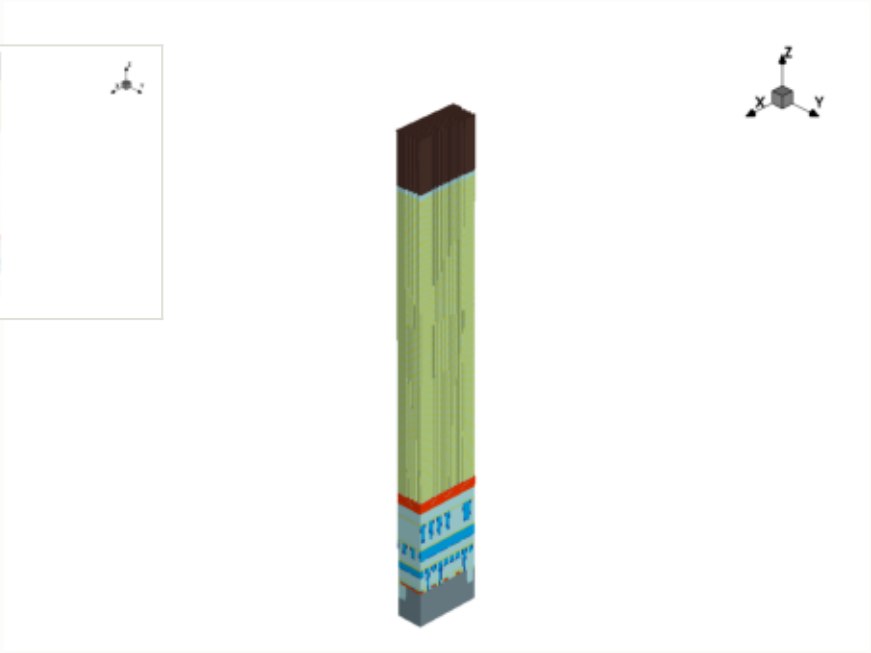


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

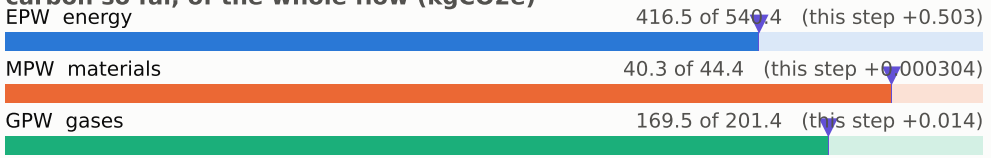


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

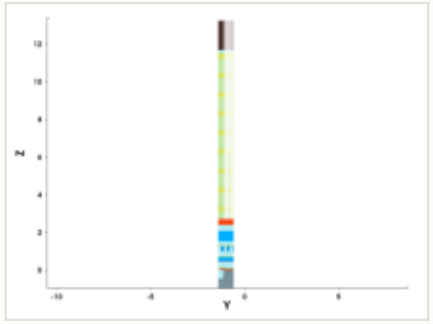


y cut at -1.035 µm

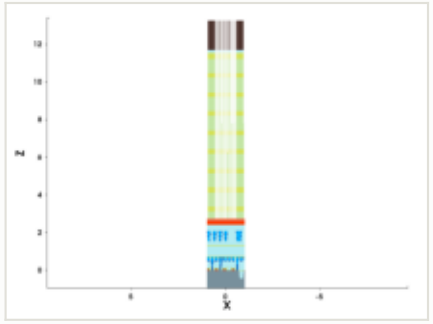


mask for this step

no mask for this step


steps by process area

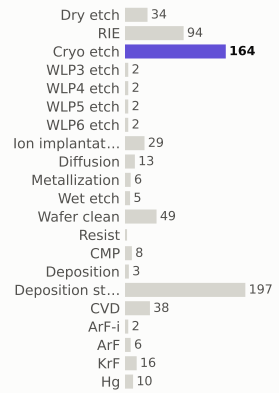

materials deposited (g)

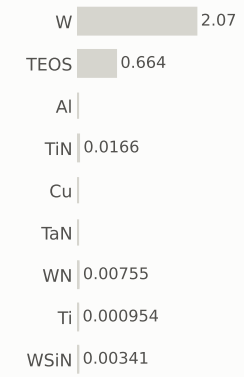

gases emitted (g)



Step #7288.3673: Cryo_etch


etch_noop · Cryo_etch

0.517	626.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




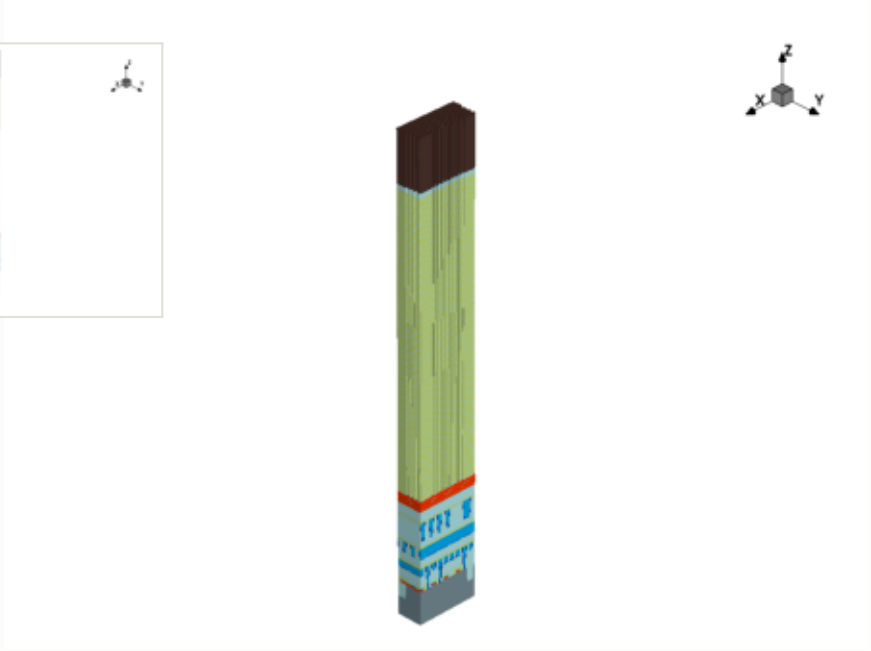

x cut at 0.000 µm

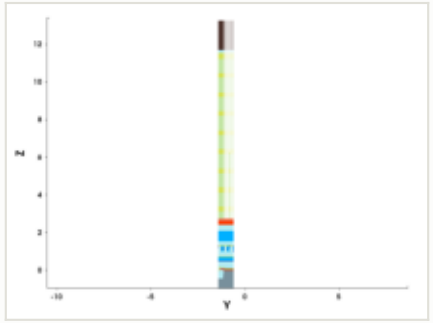

y cut at -1.035 µm

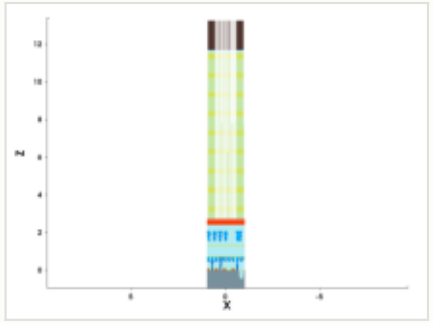

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

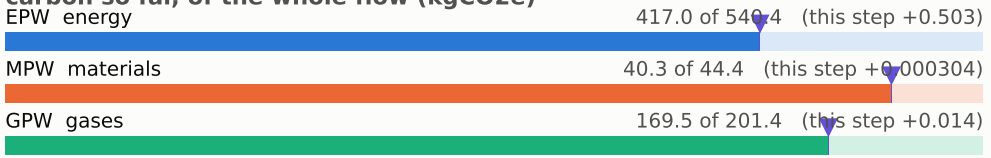


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

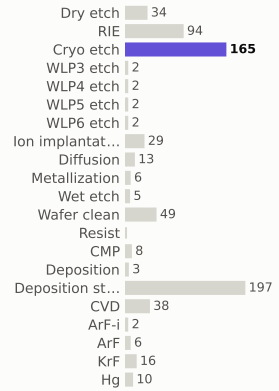

materials deposited (g)

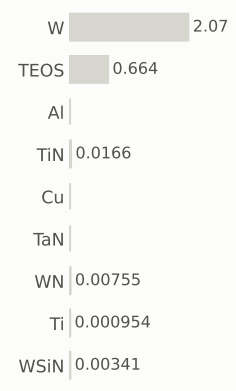

gases emitted (g)



Step #7288.4184: Cryo_etch


etch_noop · Cryo_etch

0.517	627.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



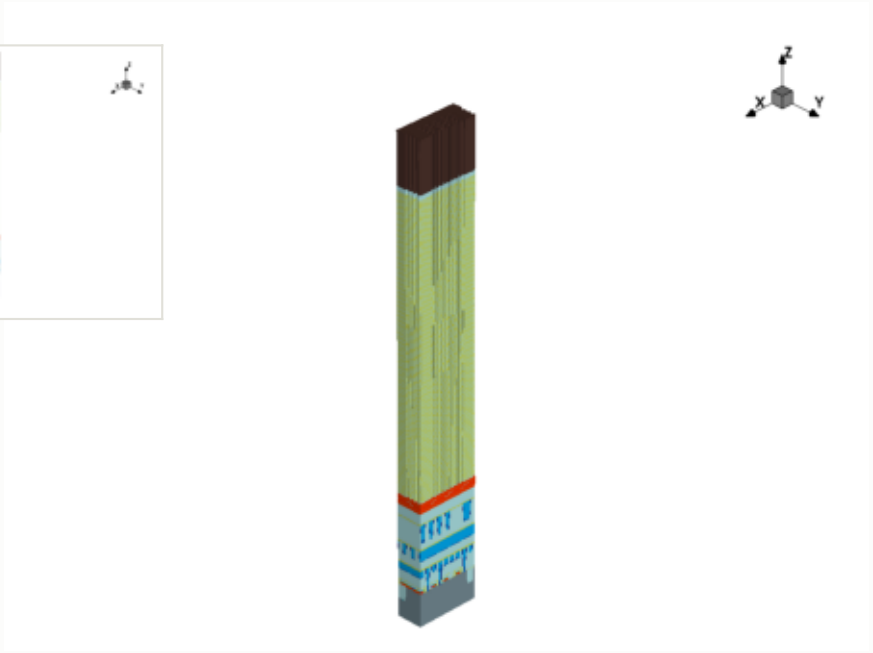


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

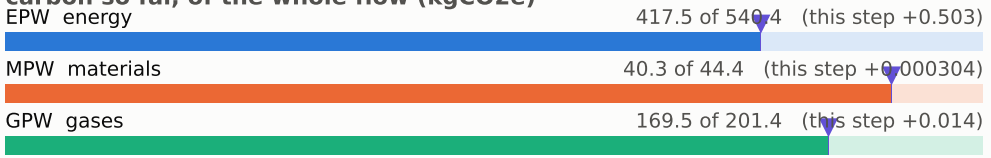


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

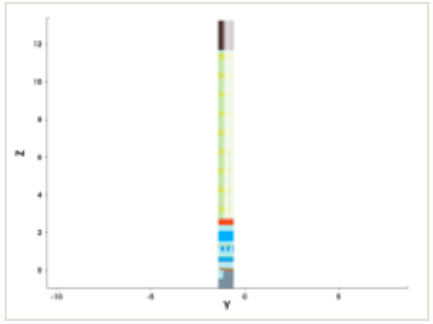


y cut at -1.035 µm

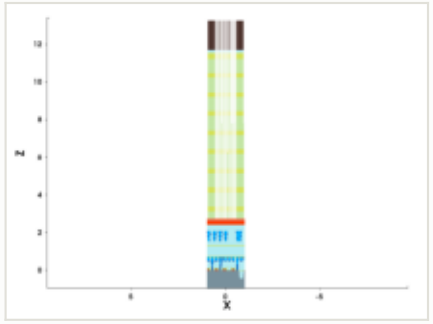


mask for this step

no mask for this step


steps by process area

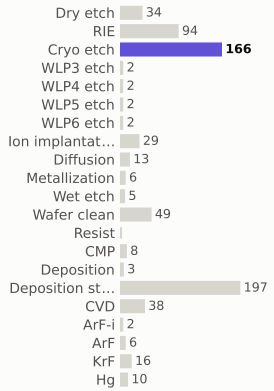

materials deposited (g)

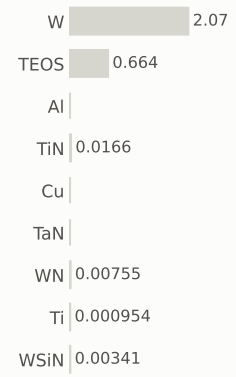

gases emitted (g)

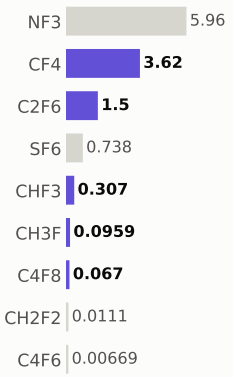

Step #7288.4694: Cryo_etch


etch_noop · Cryo_etch

0.517	627.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




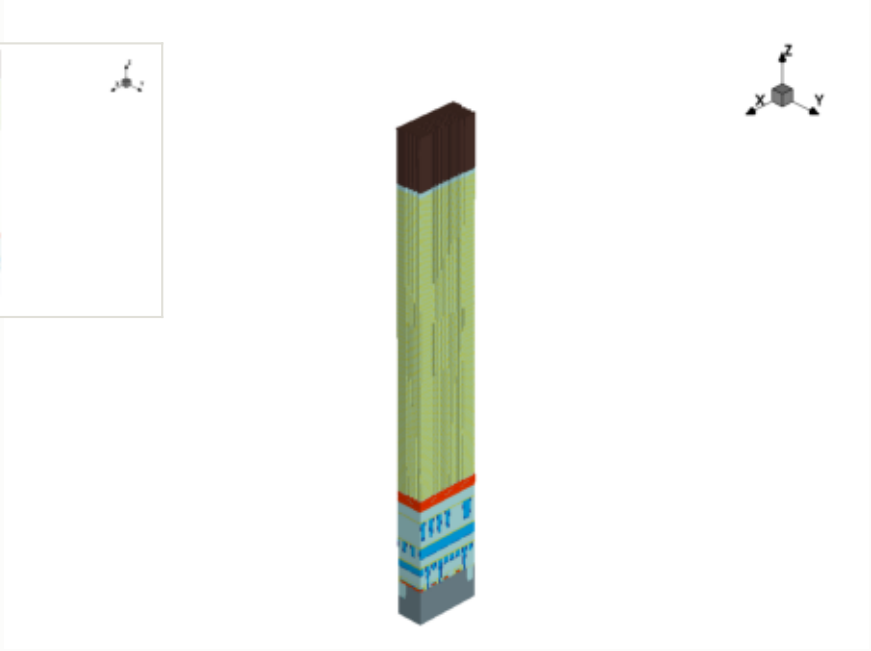

x cut at 0.000 µm

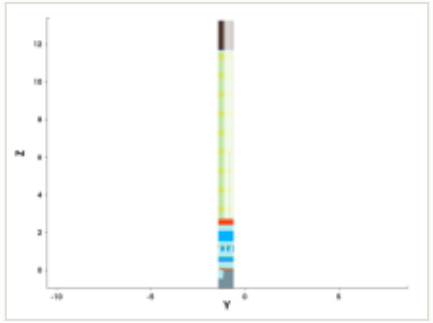

y cut at -1.035 µm

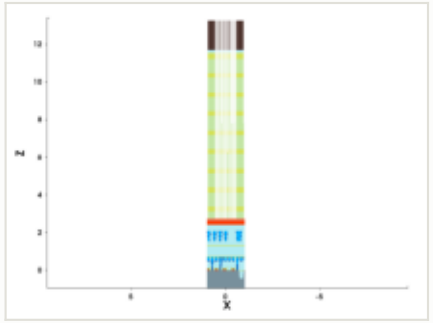

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

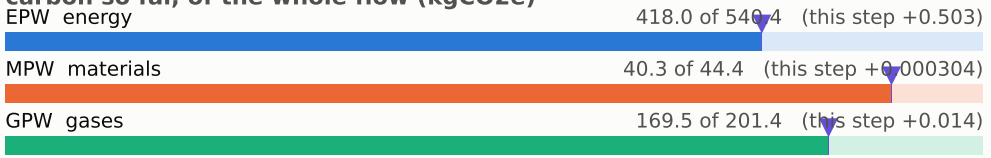


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

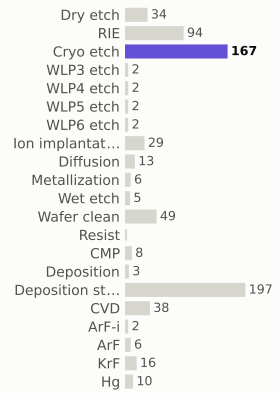

materials deposited (g)

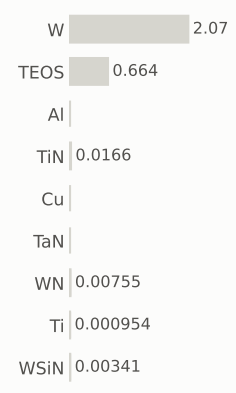

gases emitted (g)



Step #7288.5204: Cryo_etch


etch_noop · Cryo_etch

0.517	628.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




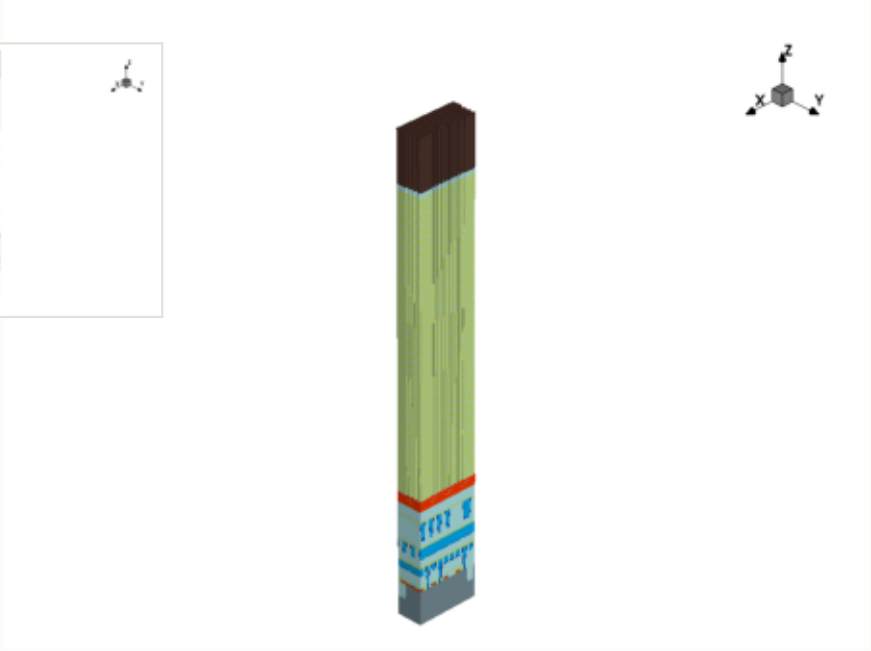

x cut at 0.000 µm

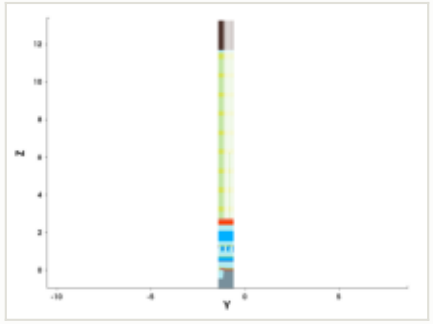

y cut at -1.035 µm

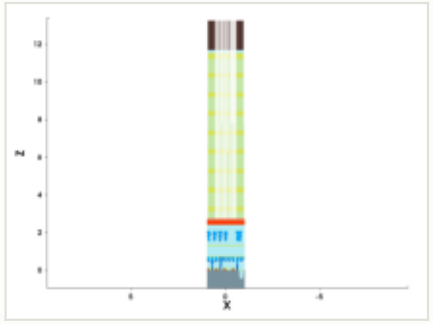

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

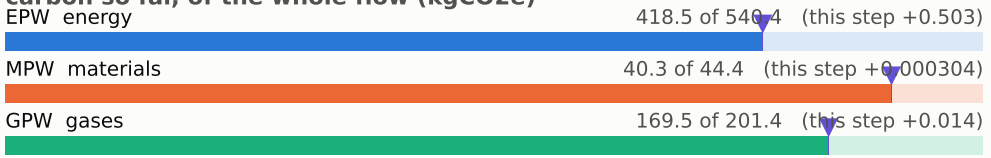


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

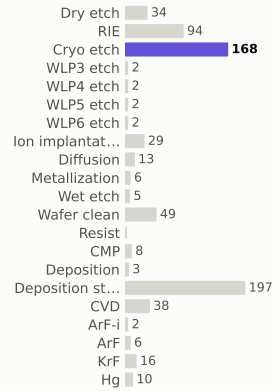

materials deposited (g)

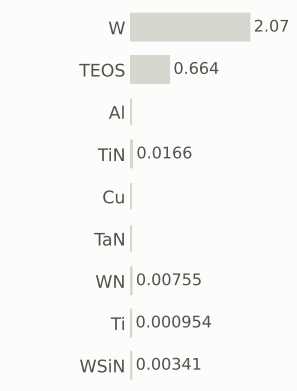

gases emitted (g)

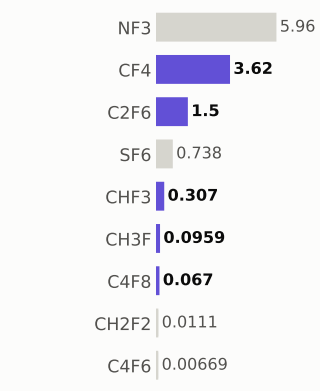

Step #7288.5714: Cryo_etch


etch_noop · Cryo_etch

0.517	628.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




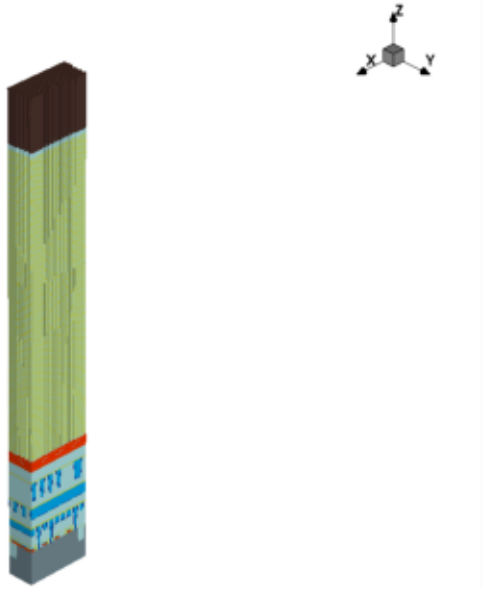

x cut at 0.000 µm

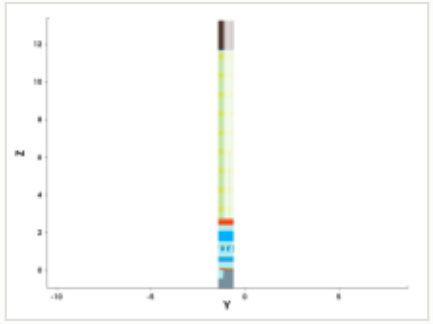

y cut at -1.035 µm

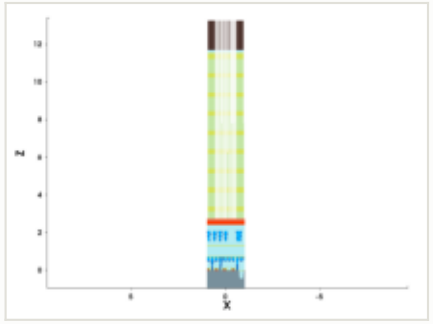

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

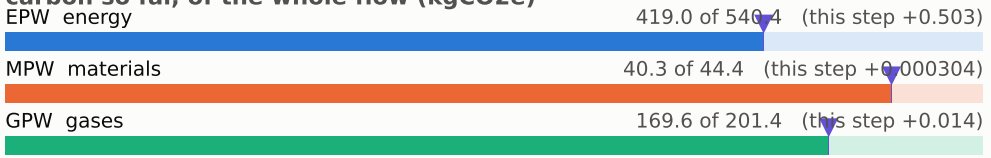


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

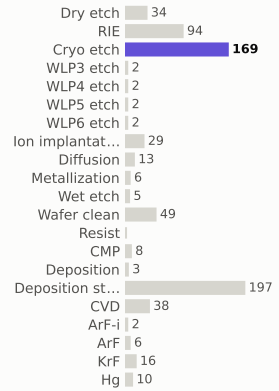

materials deposited (g)

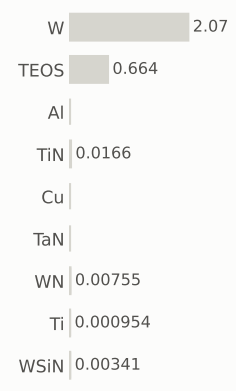

gases emitted (g)



Step #7288.6224: Cryo_etch


etch_noop · Cryo_etch

0.517	629.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




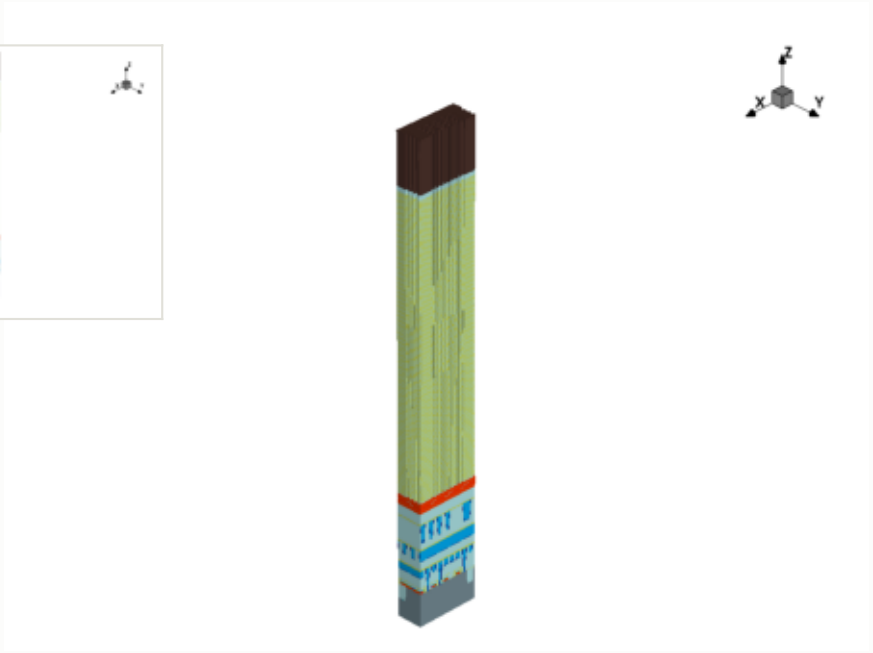

x cut at 0.000 µm

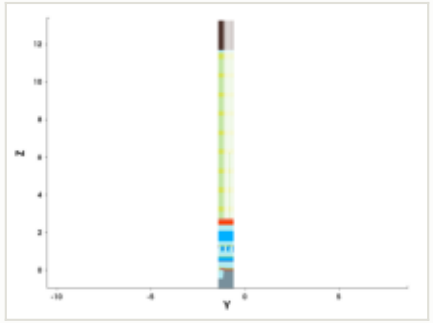

y cut at -1.035 µm

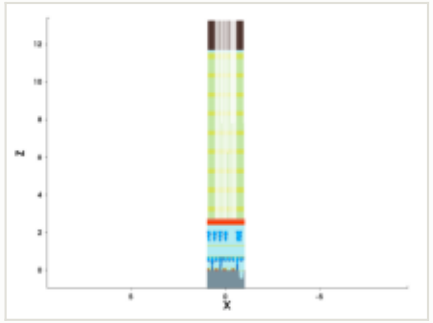

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

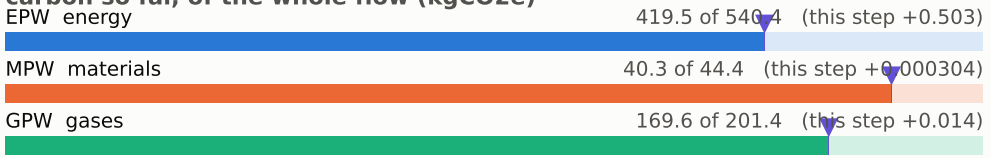


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

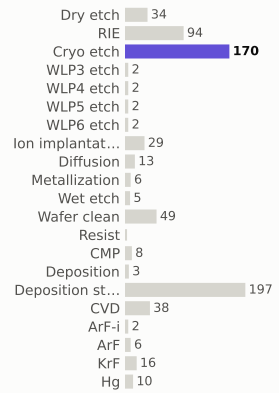

materials deposited (g)

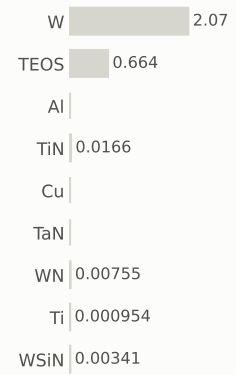

gases emitted (g)



Step #7288.6735: Cryo_etch


etch_noop · Cryo_etch

0.517	629.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




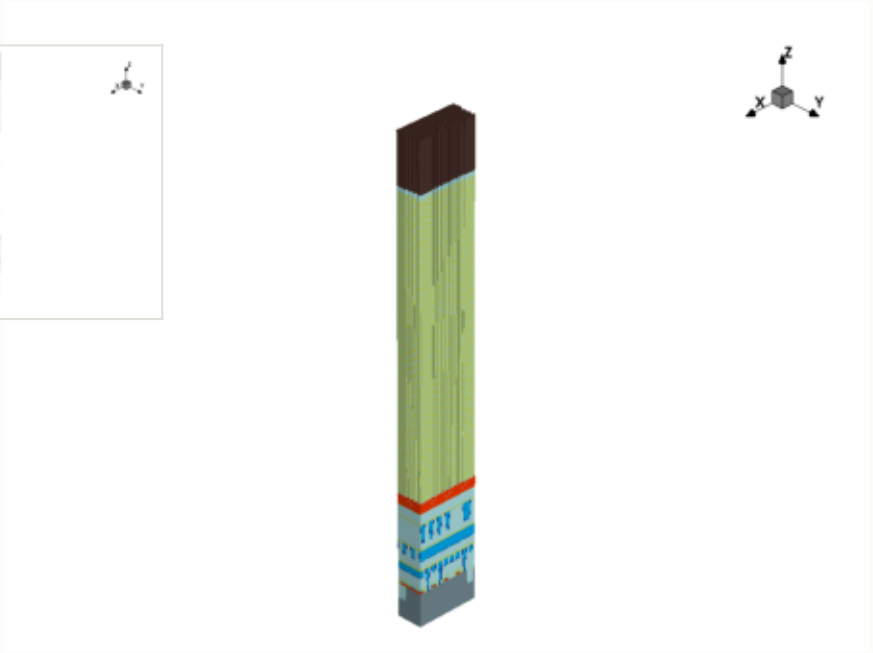

x cut at 0.000 µm

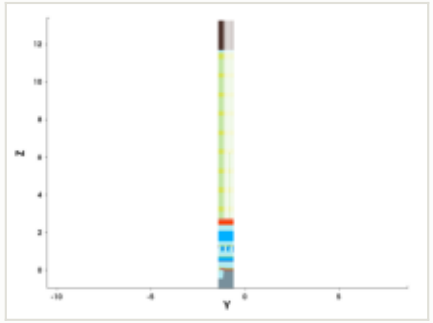

y cut at -1.035 µm

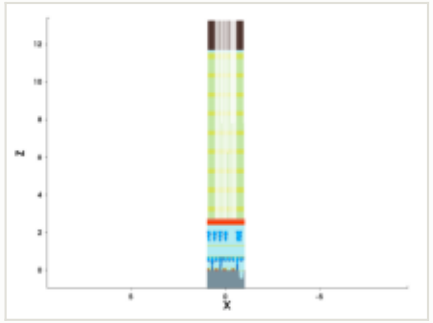

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

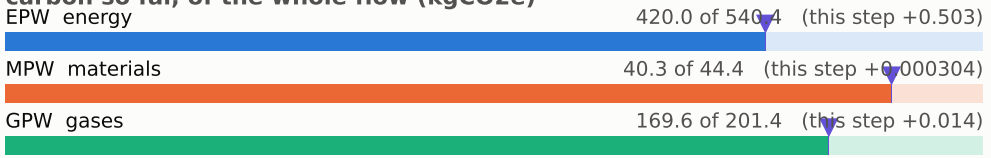


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

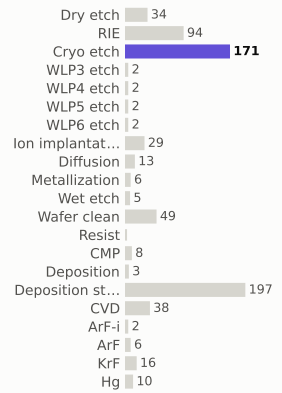

materials deposited (g)

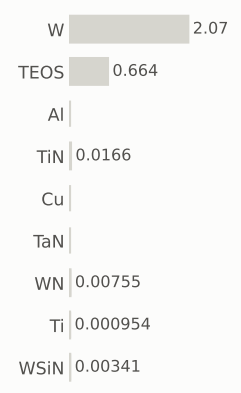

gases emitted (g)



Step #7288.7245: Cryo_etch


etch_noop · Cryo_etch

0.517	630.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



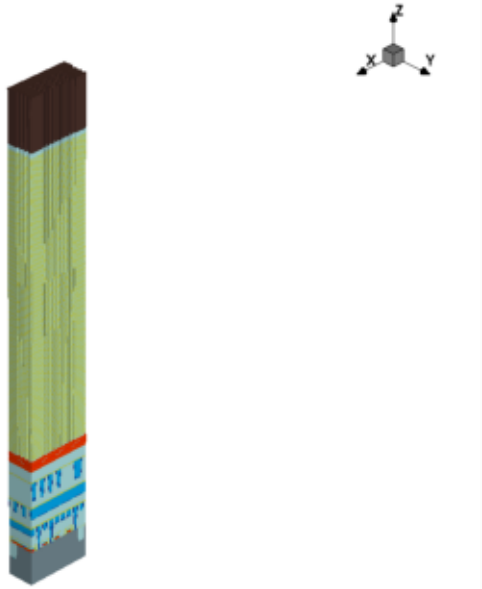


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

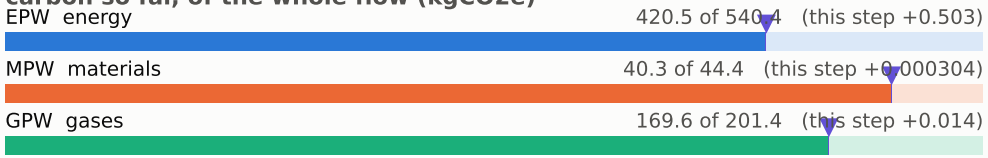


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

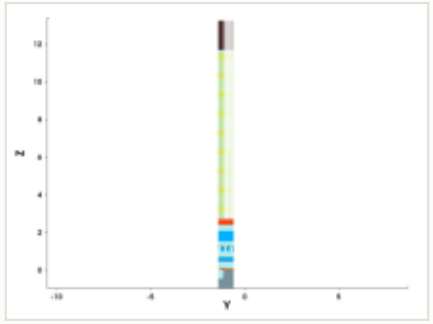


y cut at -1.035 µm

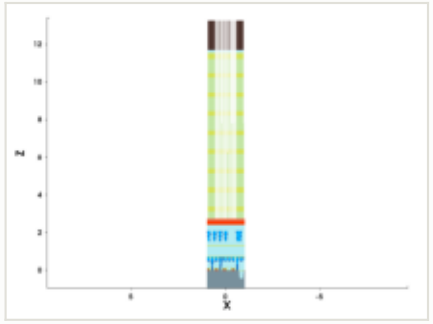


mask for this step

no mask for this step


steps by process area

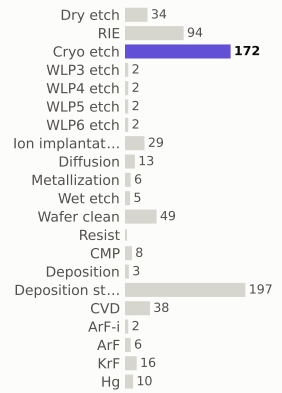

materials deposited (g)

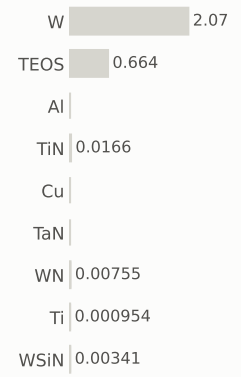

gases emitted (g)



Step #7288.7755: Cryo_etch


etch_noop · Cryo_etch

0.517	630.9	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



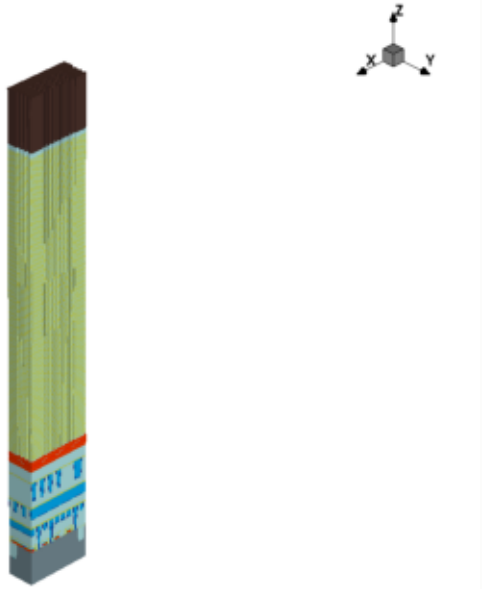


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

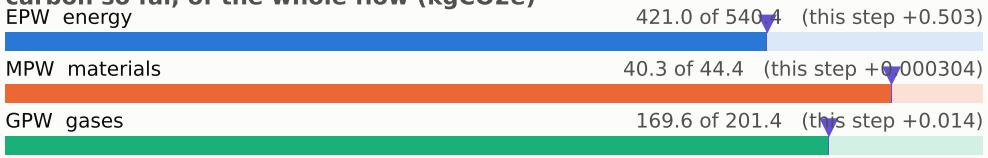


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

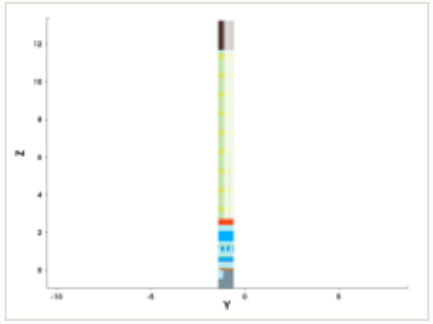


y cut at -1.035 µm

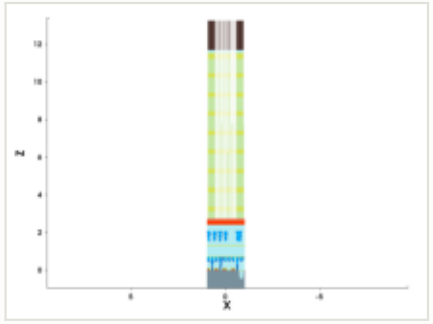


mask for this step

no mask for this step


steps by process area

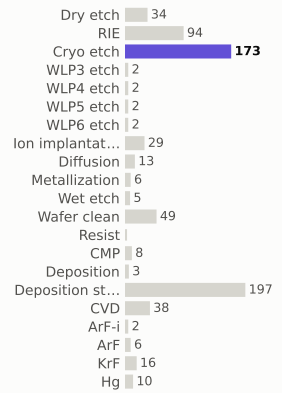

materials deposited (g)

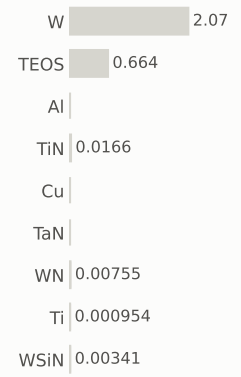

gases emitted (g)



Step #7288.8265: Cryo_etch


etch_noop · Cryo_etch

0.517	631.4	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



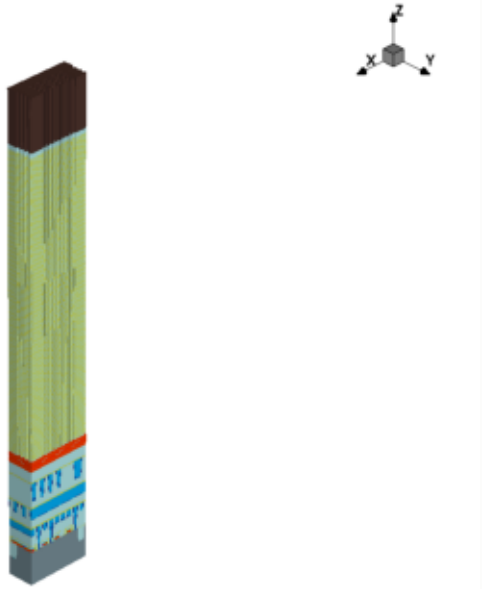


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

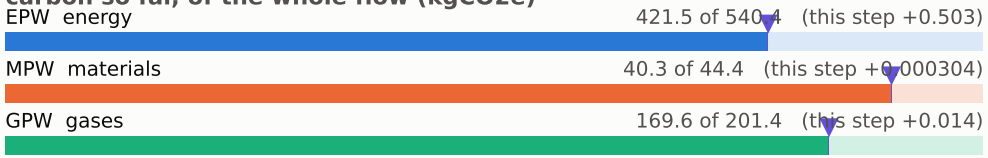


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

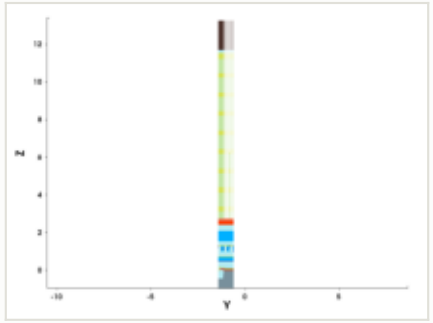


y cut at -1.035 µm

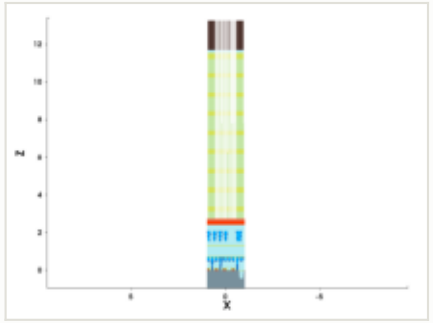


mask for this step

no mask for this step


steps by process area

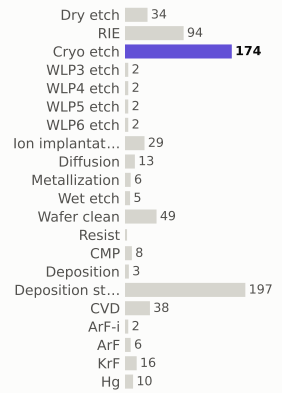

materials deposited (g)

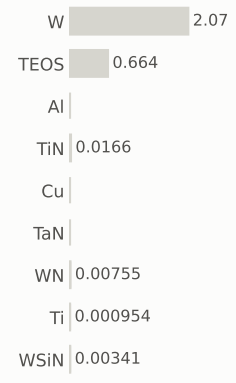

gases emitted (g)

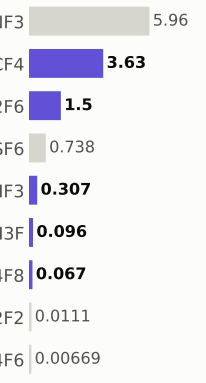

Step #7288.8776: Cryo_etch


etch_noop · Cryo_etch

0.517	632.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




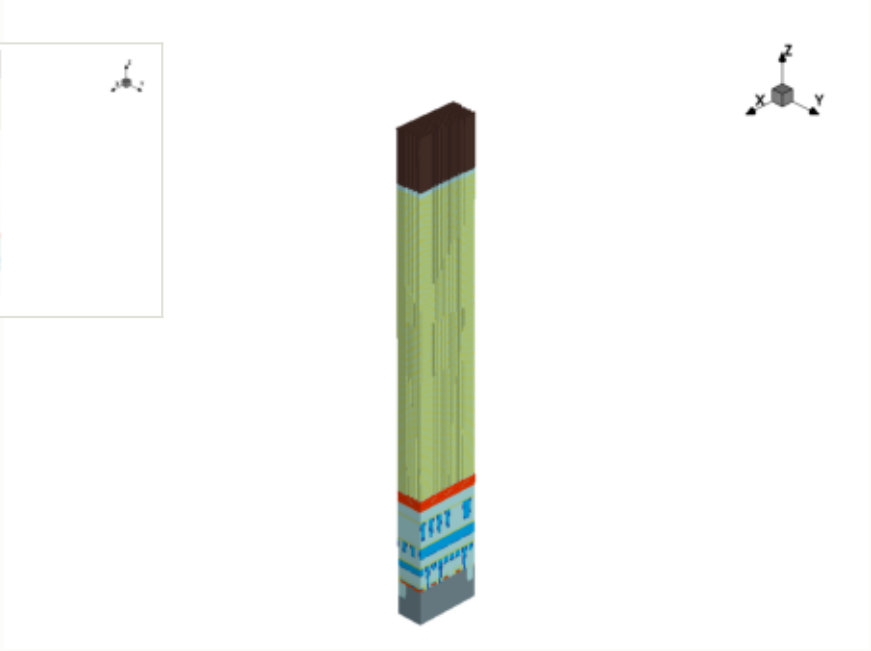

x cut at 0.000 µm

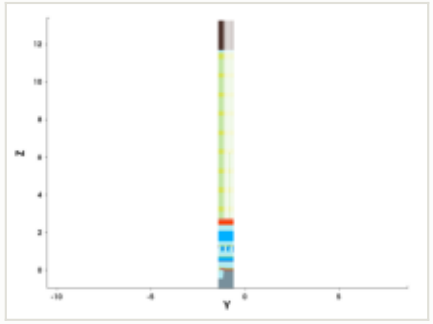

y cut at -1.035 µm

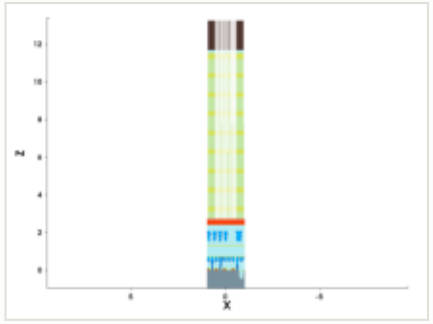

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

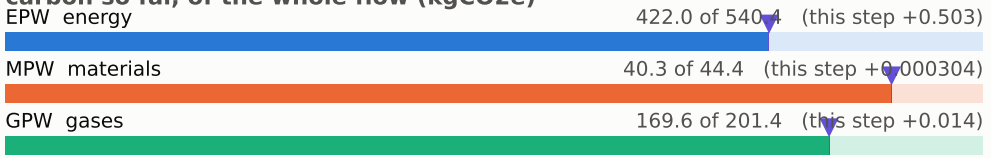


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

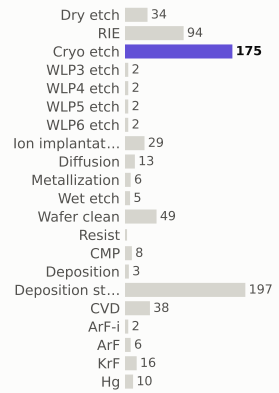

materials deposited (g)

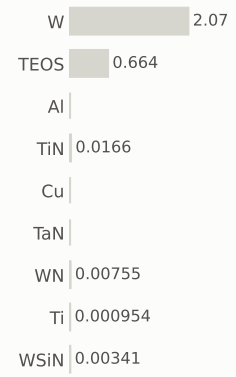

gases emitted (g)



Step #7288.9286: Cryo_etch


etch_noop · Cryo_etch

0.517	632.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




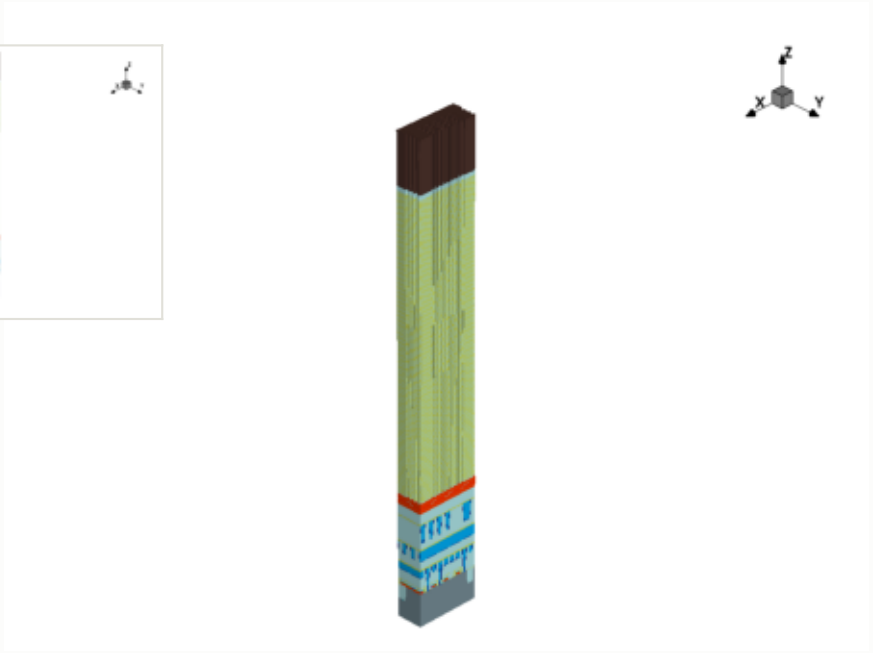

x cut at 0.000 µm

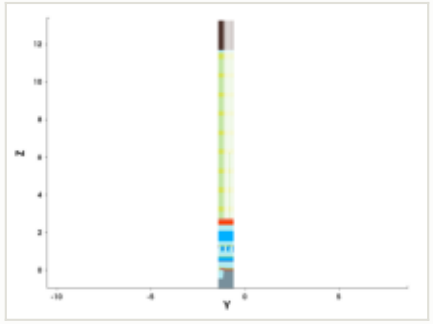

y cut at -1.035 µm

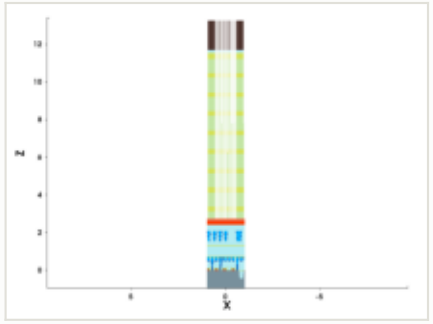

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

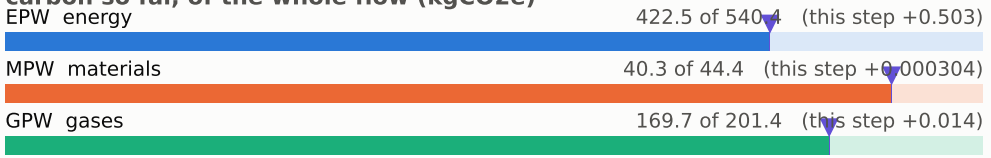


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

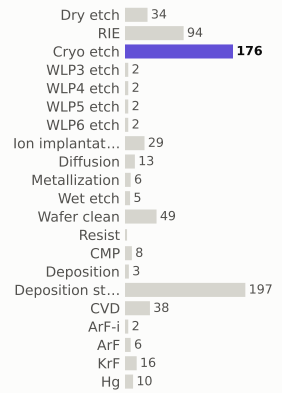

materials deposited (g)

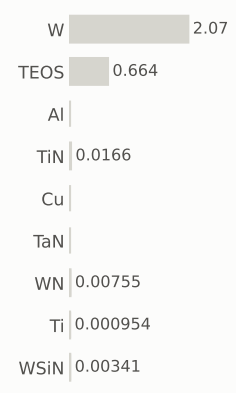

gases emitted (g)



Step #7288.9796: Cryo_etch


etch_noop · Cryo_etch

0.517	633.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



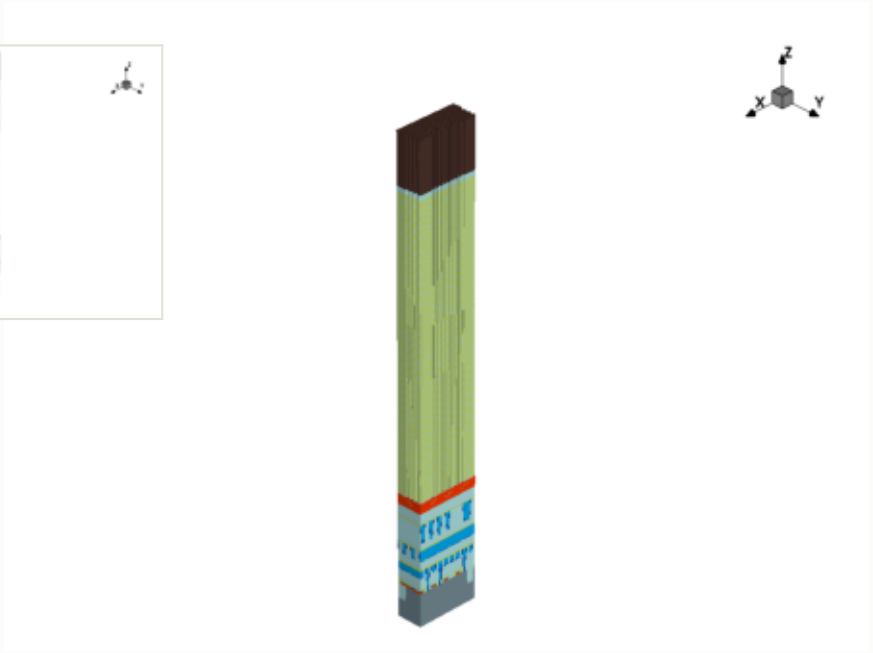


this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

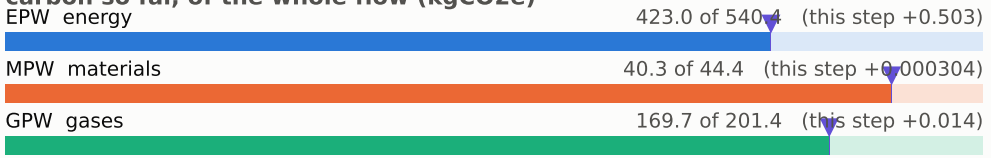


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

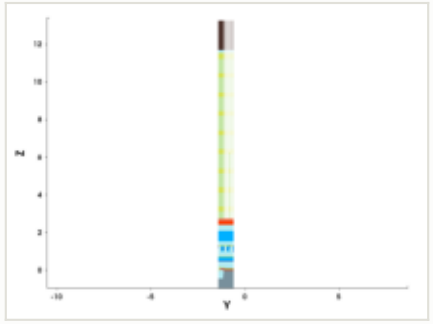


y cut at -1.035 µm

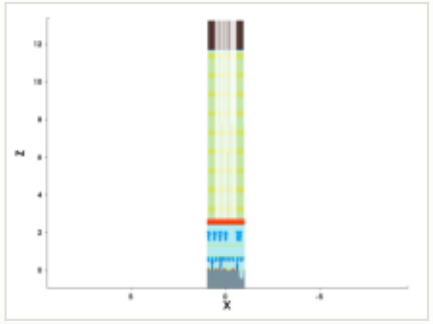


mask for this step

no mask for this step


steps by process area

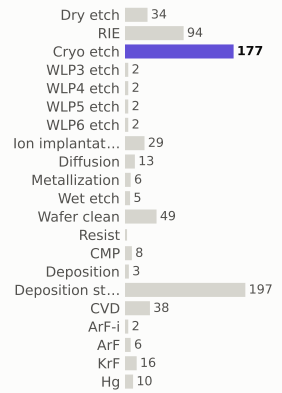

materials deposited (g)

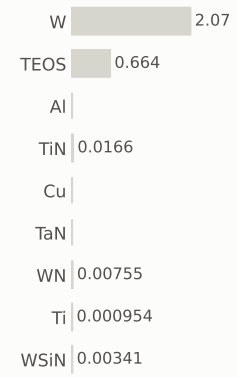

gases emitted (g)



Step #7289.0306: Cryo_etch


etch_noop · Cryo_etch

0.517	633.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



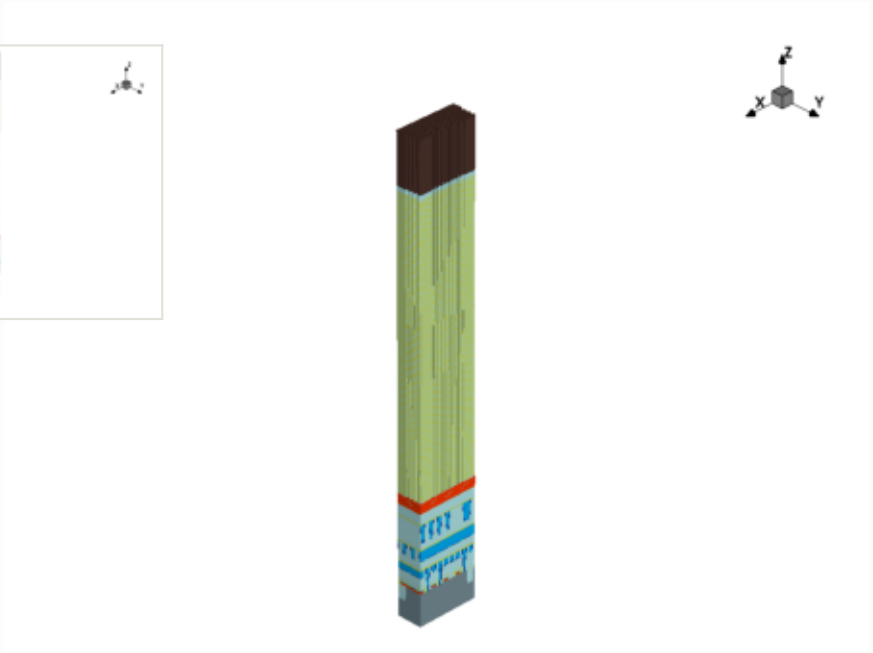


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

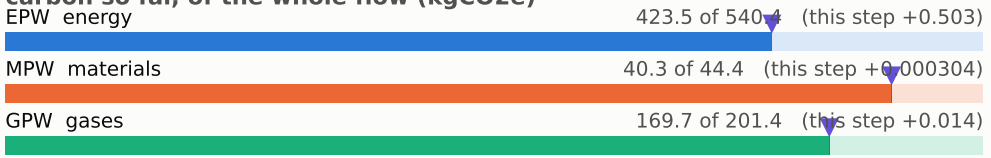


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

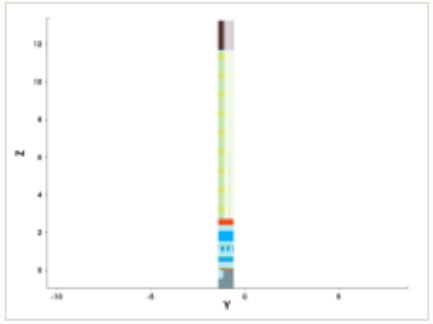


y cut at -1.035 µm

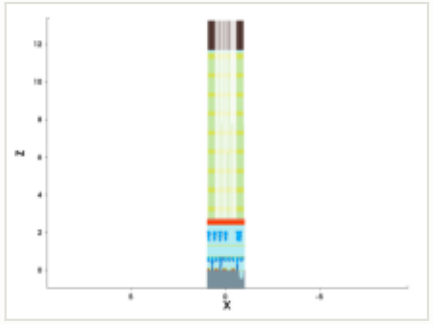


mask for this step

no mask for this step


steps by process area

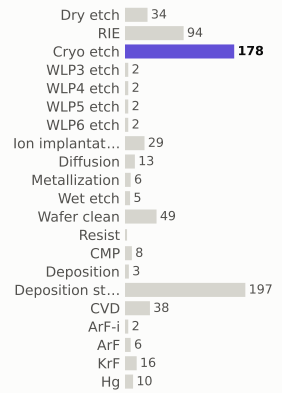

materials deposited (g)

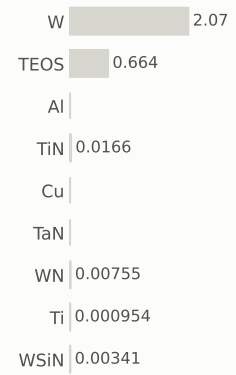

gases emitted (g)



Step #7289.0816: Cryo_etch


etch_noop · Cryo_etch

0.517	634.0	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




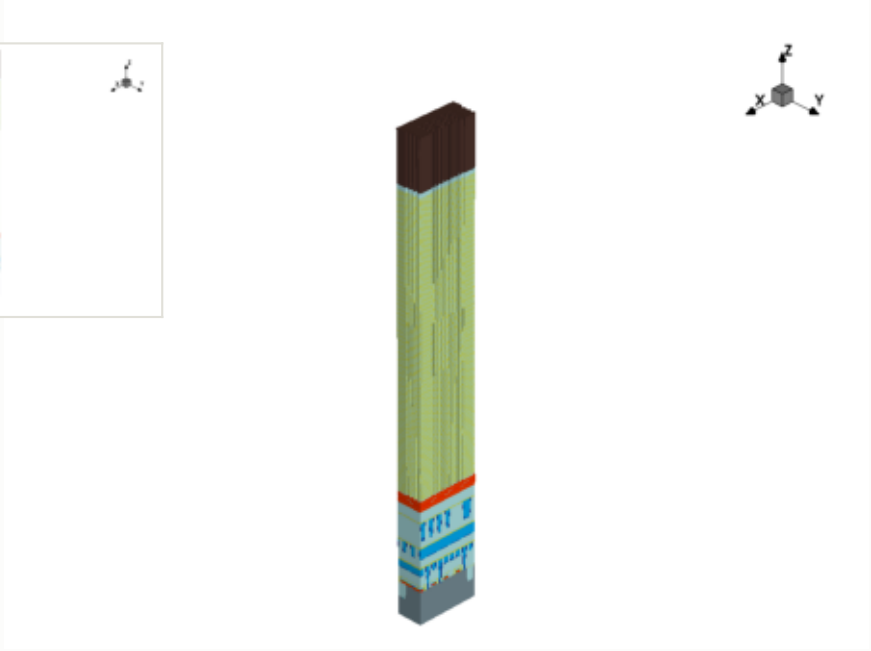

x cut at 0.000 µm

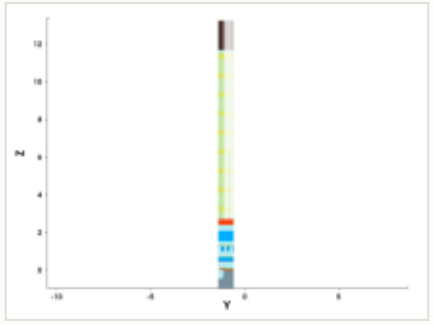

y cut at -1.035 µm

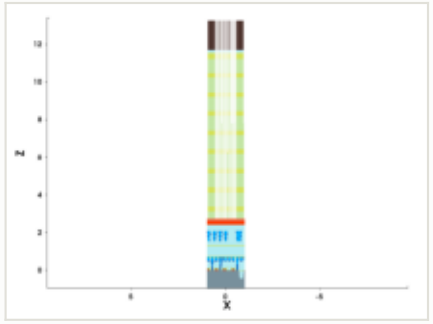

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

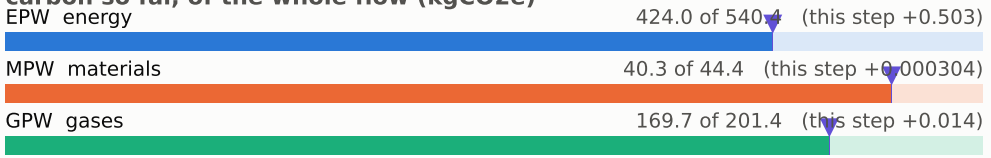


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

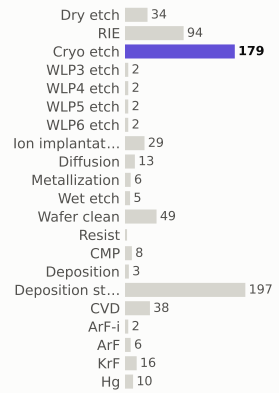

materials deposited (g)

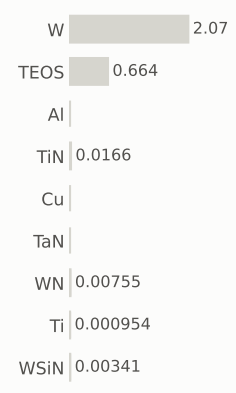

gases emitted (g)



Step #7289.1327: Cryo_etch


etch_noop · Cryo_etch

0.517	634.5	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




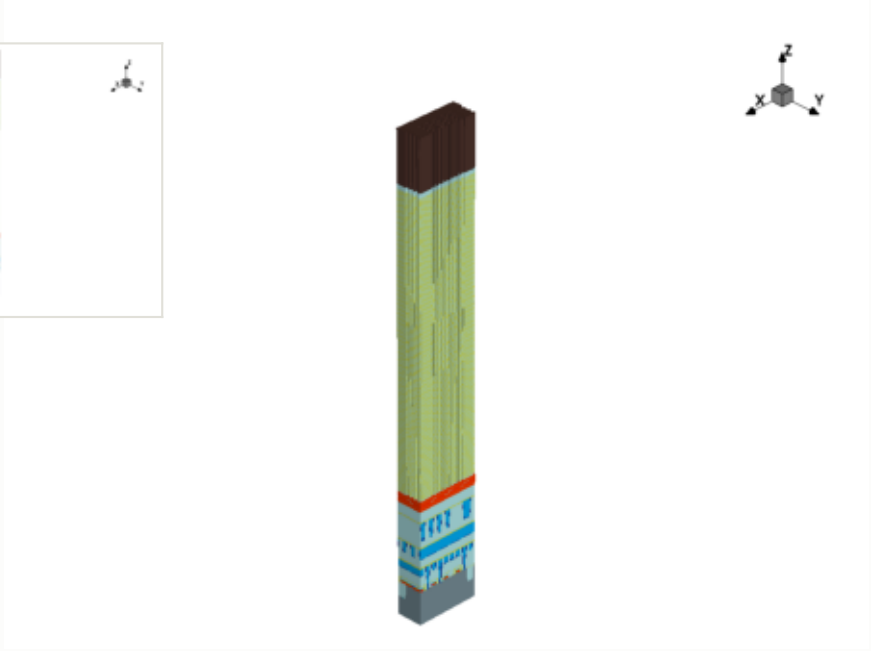

x cut at 0.000 µm

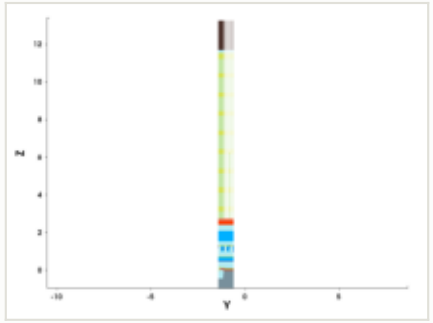

y cut at -1.035 µm

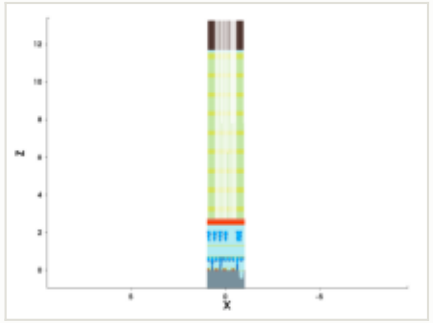

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

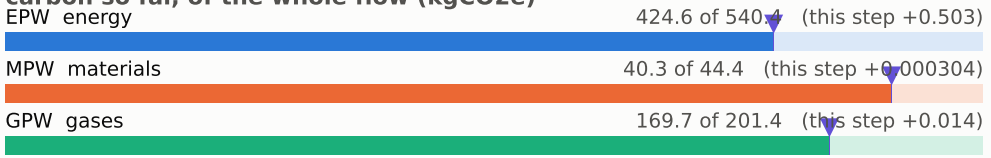


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

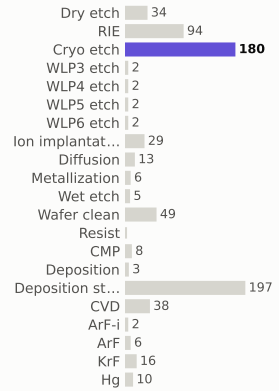

materials deposited (g)

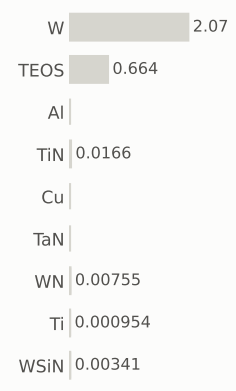

gases emitted (g)



Step #7289.1837: Cryo_etch


etch_noop · Cryo_etch

0.517	635.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




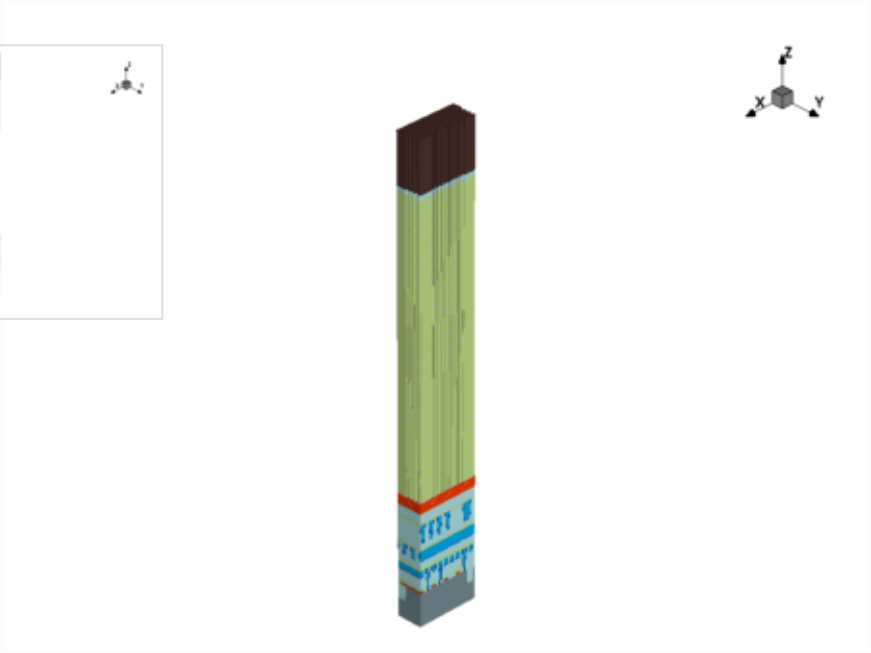

x cut at 0.000 µm

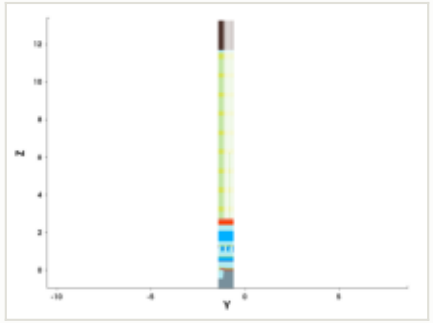

y cut at -1.035 µm

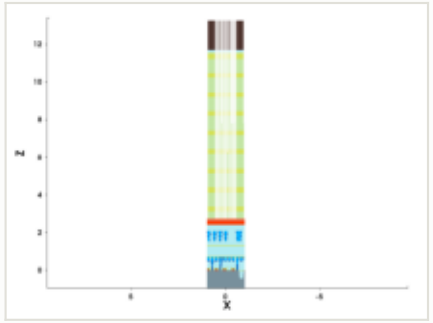

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

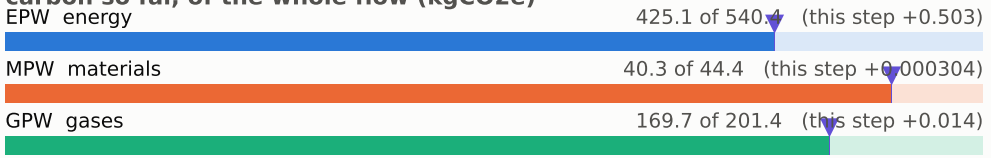


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

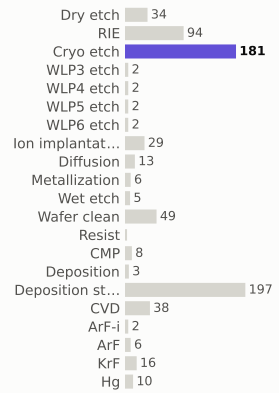

materials deposited (g)

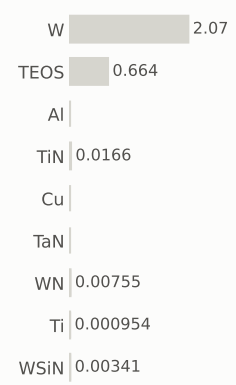

gases emitted (g)



Step #7289.2347: Cryo_etch


etch_noop · Cryo_etch

0.517	635.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




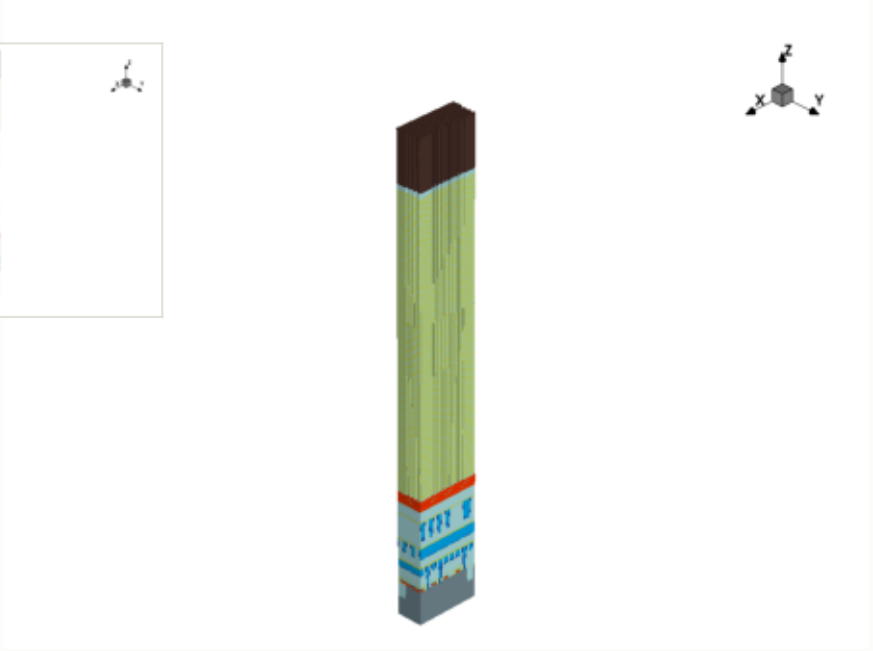

x cut at 0.000 µm

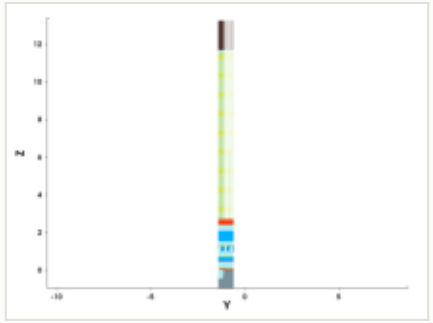

y cut at -1.035 µm

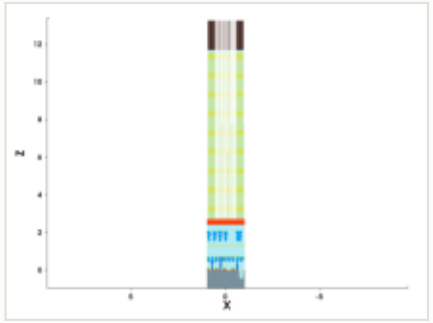

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

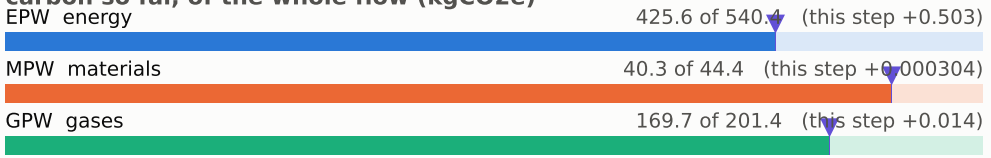


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

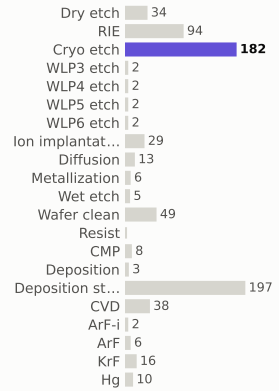

materials deposited (g)

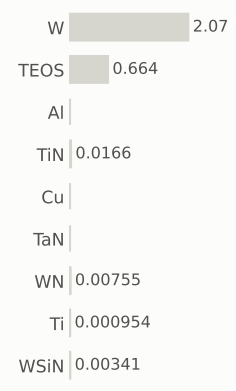

gases emitted (g)



Step #7289.2857: Cryo_etch


etch_noop · Cryo_etch

0.517	636.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




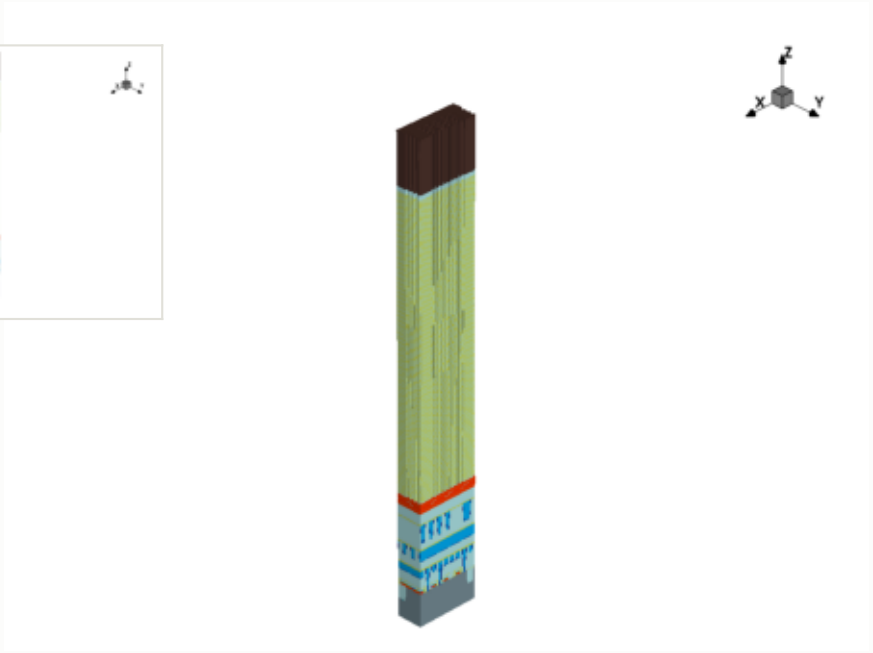

x cut at 0.000 µm

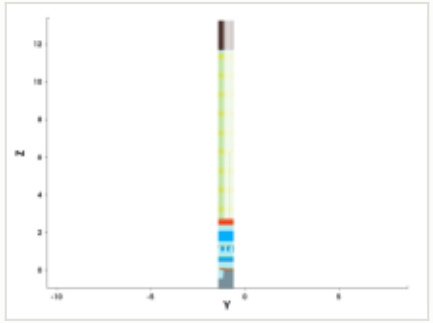

y cut at -1.035 µm

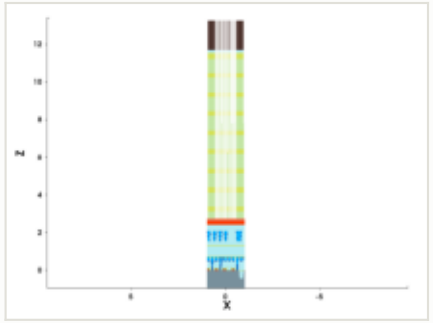

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

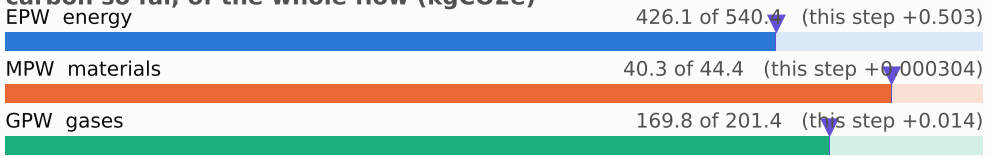


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

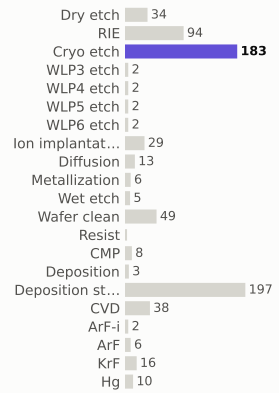

materials deposited (g)

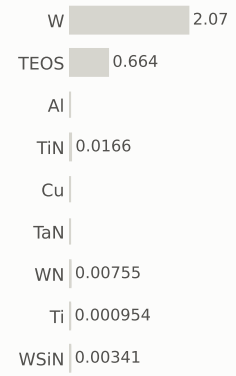

gases emitted (g)



Step #7289.3367: Cryo_etch


etch_noop · Cryo_etch

0.517	636.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




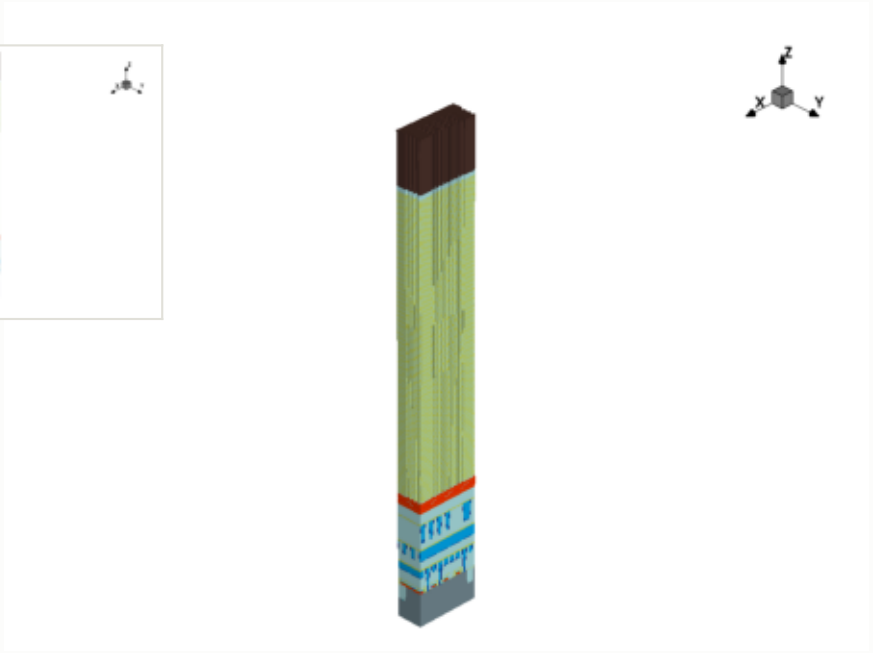

x cut at 0.000 µm

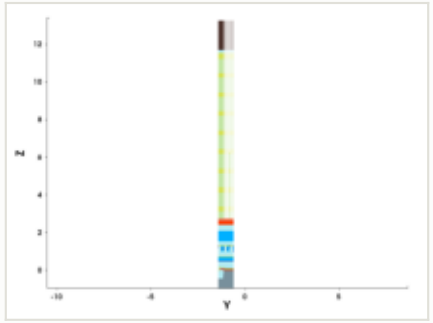

y cut at -1.035 µm

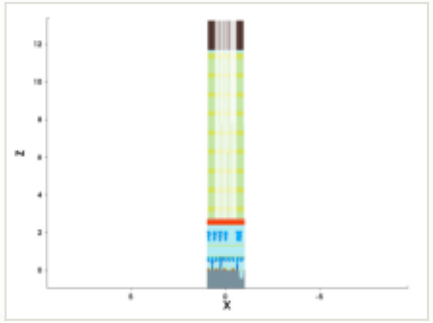

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

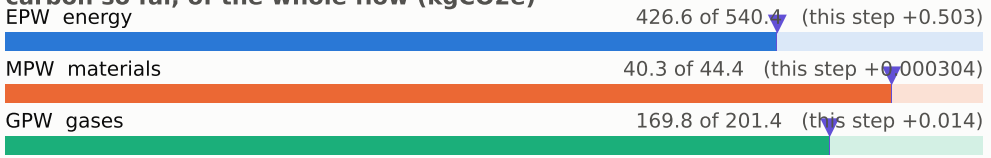


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

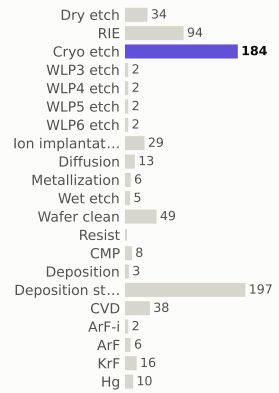

materials deposited (g)

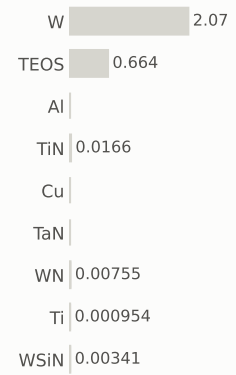

gases emitted (g)



Step #7289.3878: Cryo_etch


etch_noop · Cryo_etch

0.517	637.1	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




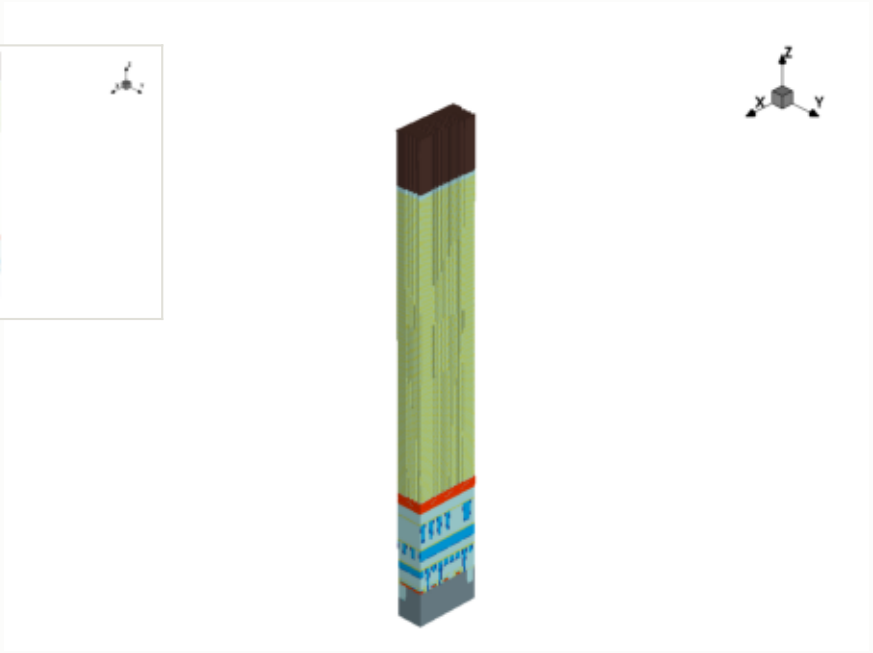

x cut at 0.000 µm

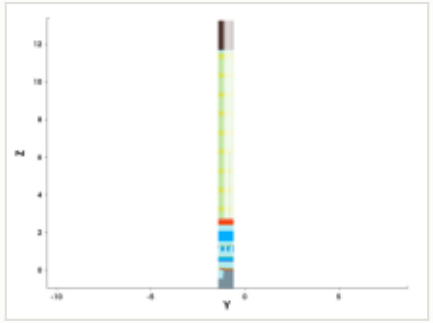

y cut at -1.035 µm

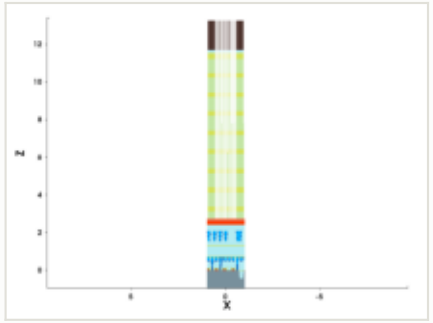

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

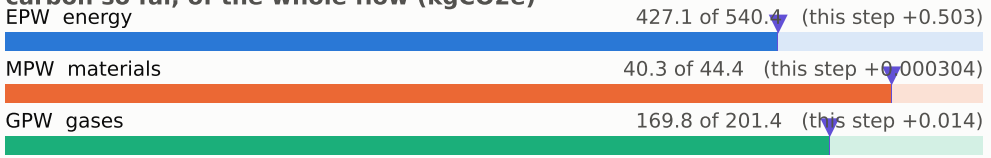


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

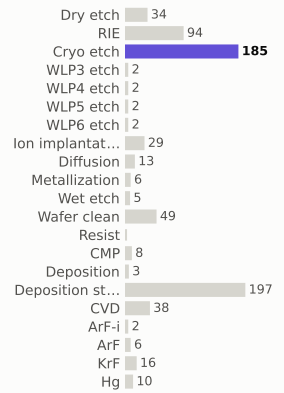

materials deposited (g)

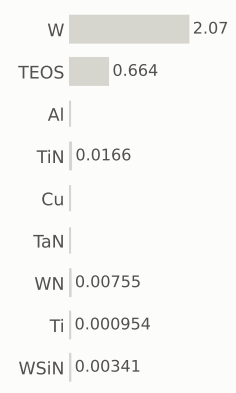

gases emitted (g)



Step #7289.4388: Cryo_etch


etch_noop · Cryo_etch

0.517	637.6	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




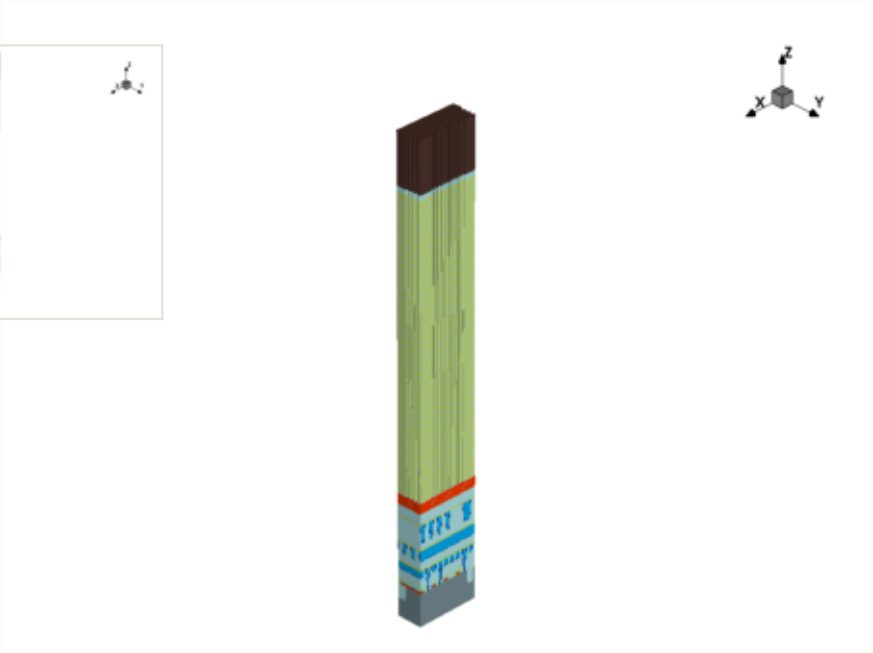

x cut at 0.000 µm

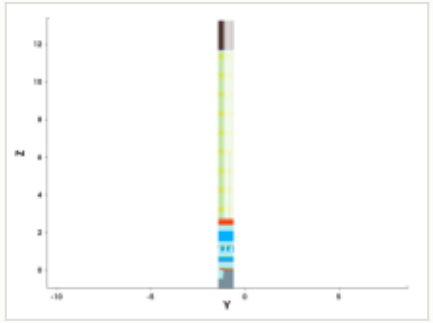

y cut at -1.035 µm

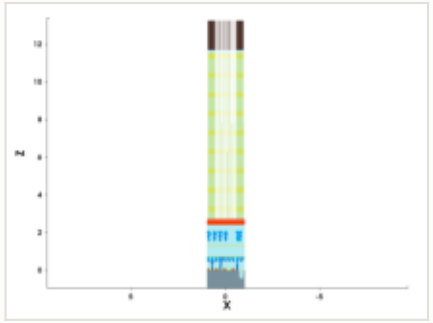

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

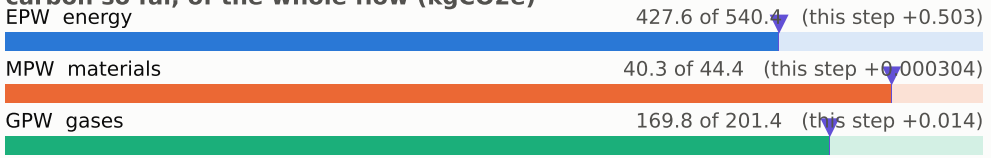


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

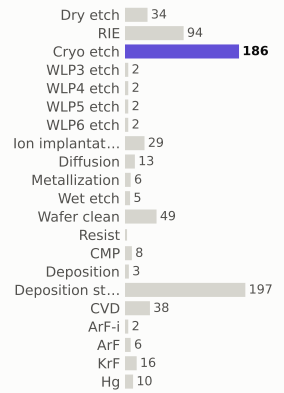

materials deposited (g)

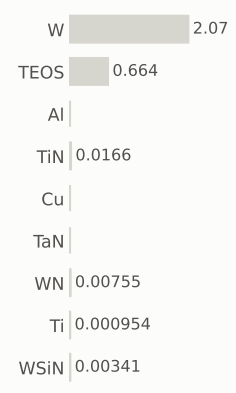

gases emitted (g)



Step #7289.4898: Cryo_etch


etch_noop · Cryo_etch

0.517	638.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




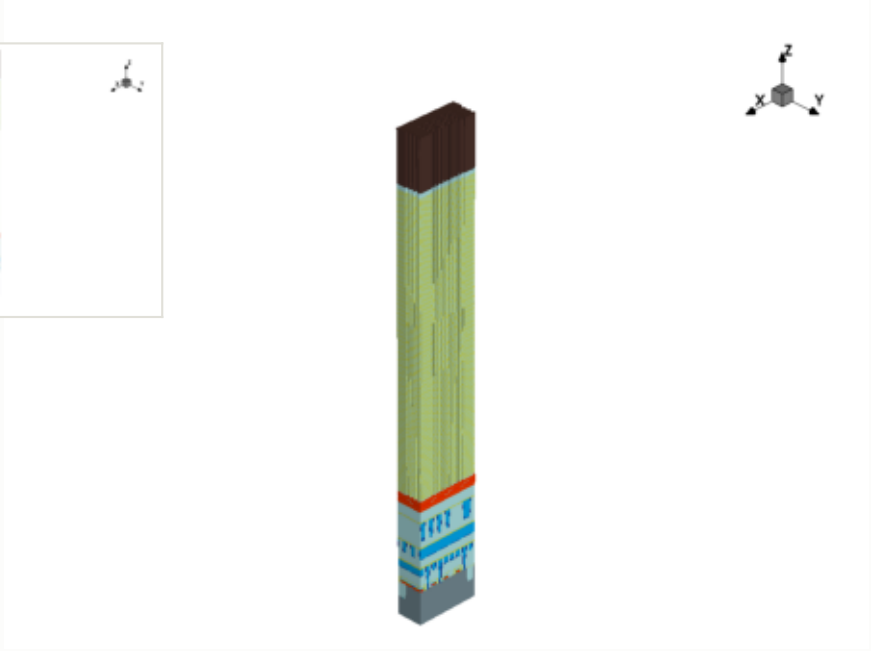

x cut at 0.000 µm

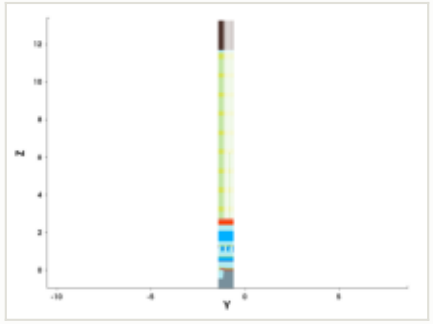

y cut at -1.035 µm

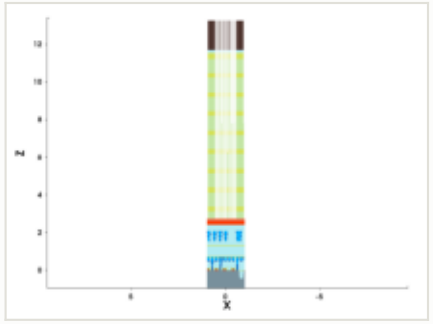

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

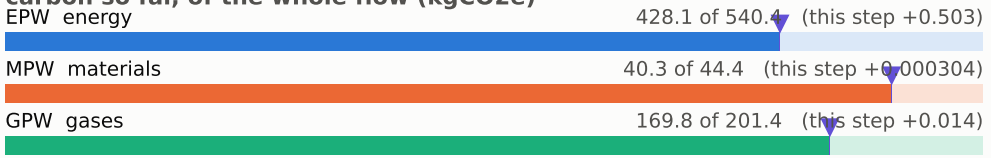


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

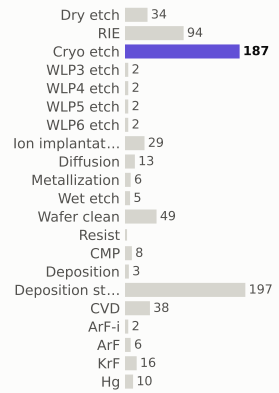

materials deposited (g)

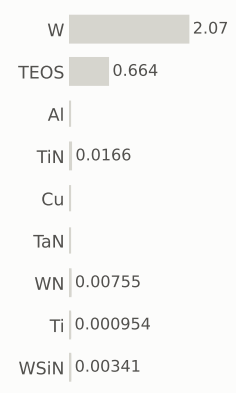

gases emitted (g)



Step #7289.5408: Cryo_etch

etch_noop · Cryo_etch

0.517	638.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead


EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

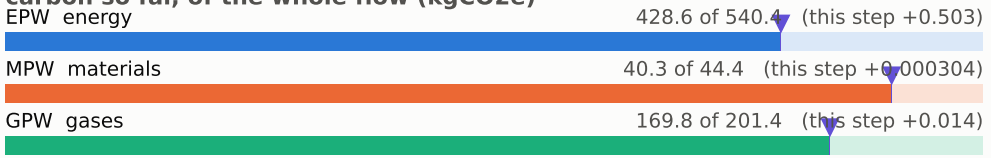


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

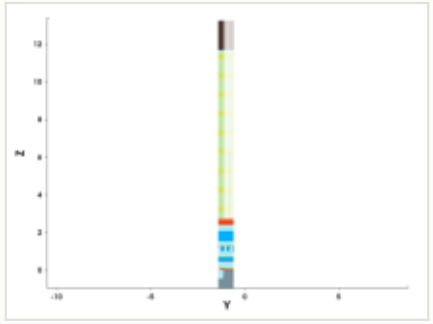


y cut at -1.035 µm

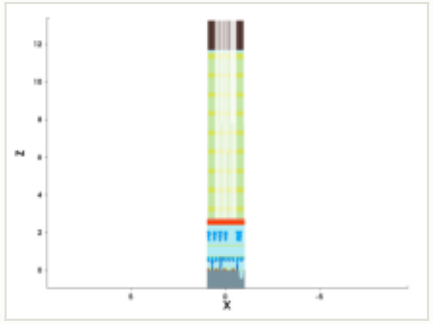


mask for this step

no mask for this step


steps by process area

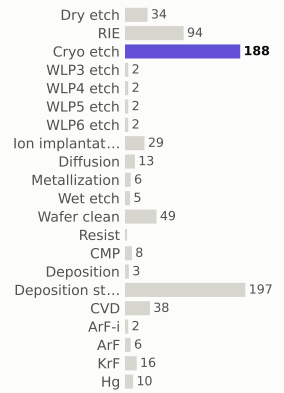

materials deposited (g)

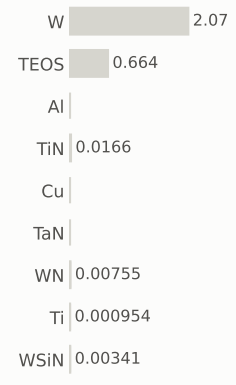

gases emitted (g)



Step #7289.5918: Cryo_etch


etch_noop · Cryo_etch

0.517	639.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



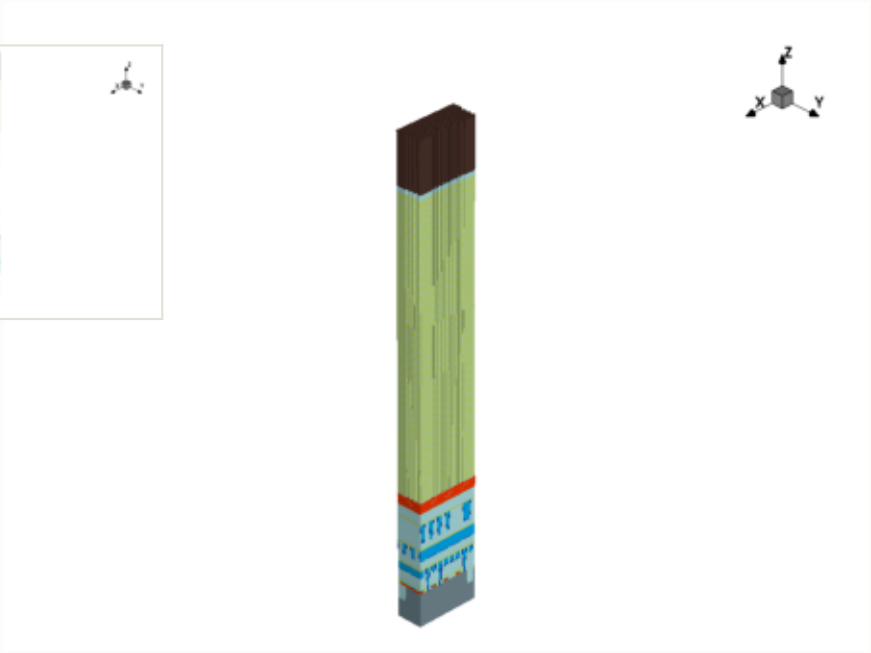


this step

process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

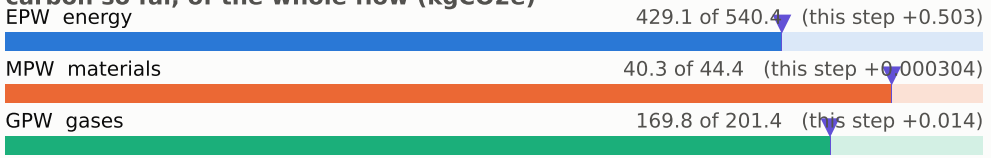


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

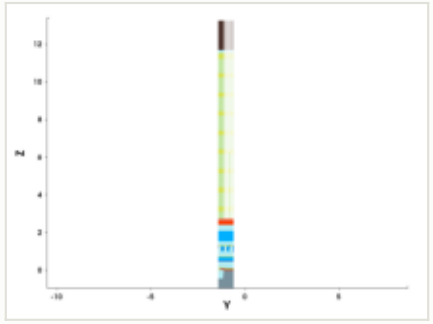


y cut at -1.035 µm

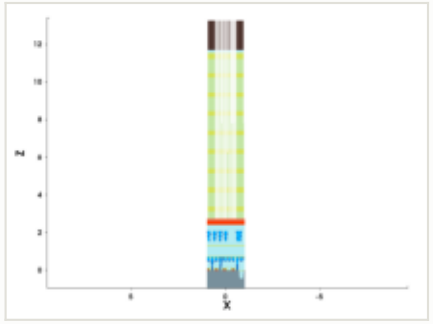


mask for this step

no mask for this step


steps by process area

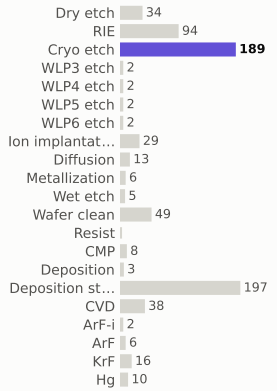

materials deposited (g)

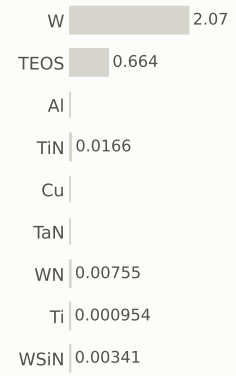

gases emitted (g)



Step #7289.6429: Cryo_etch


etch_noop · Cryo_etch

0.517	639.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



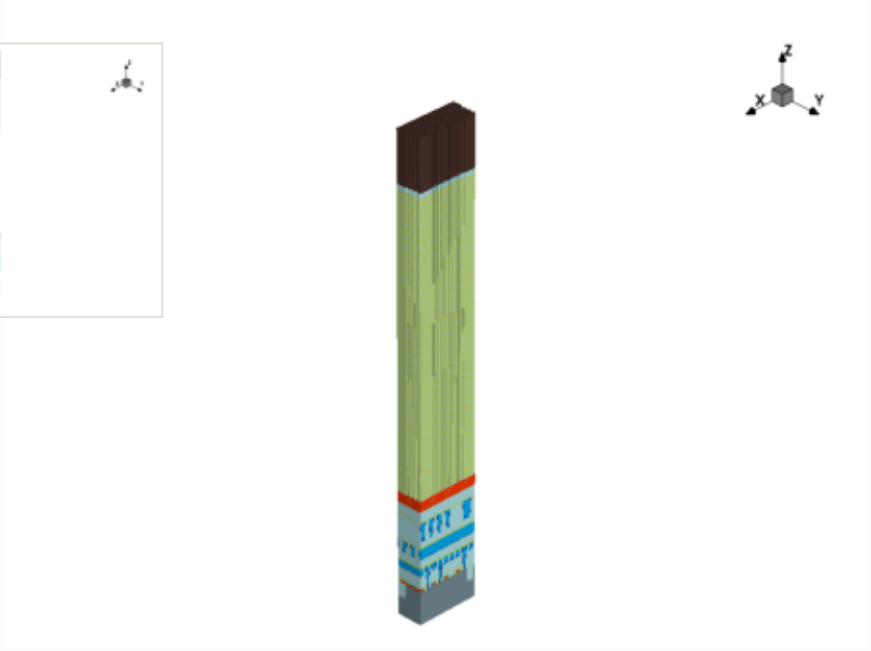


this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

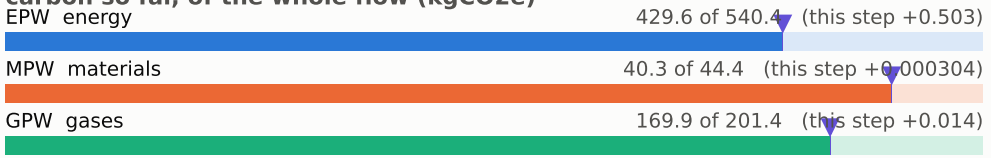


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

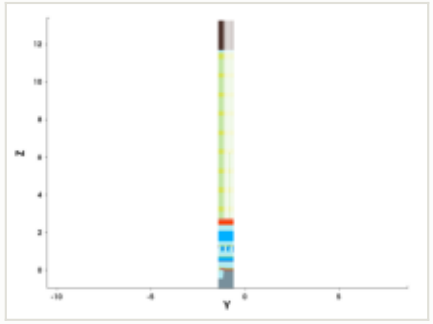


y cut at -1.035 µm

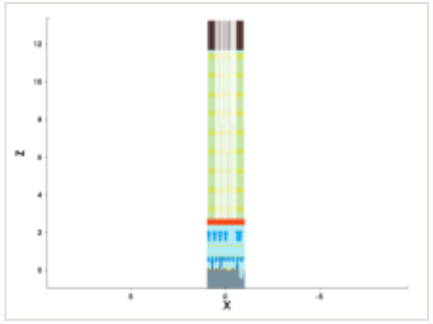


mask for this step

no mask for this step


steps by process area

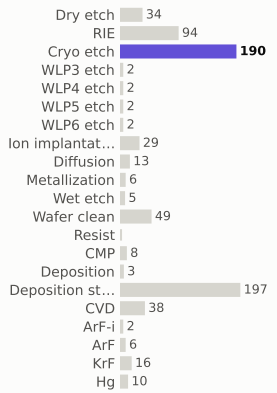

materials deposited (g)

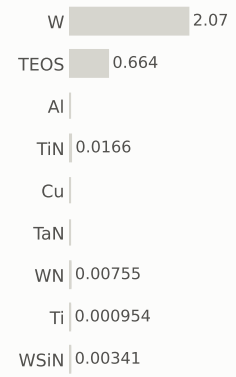

gases emitted (g)



Step #7289.6939: Cryo_etch


etch_noop · Cryo_etch

0.517	640.2	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




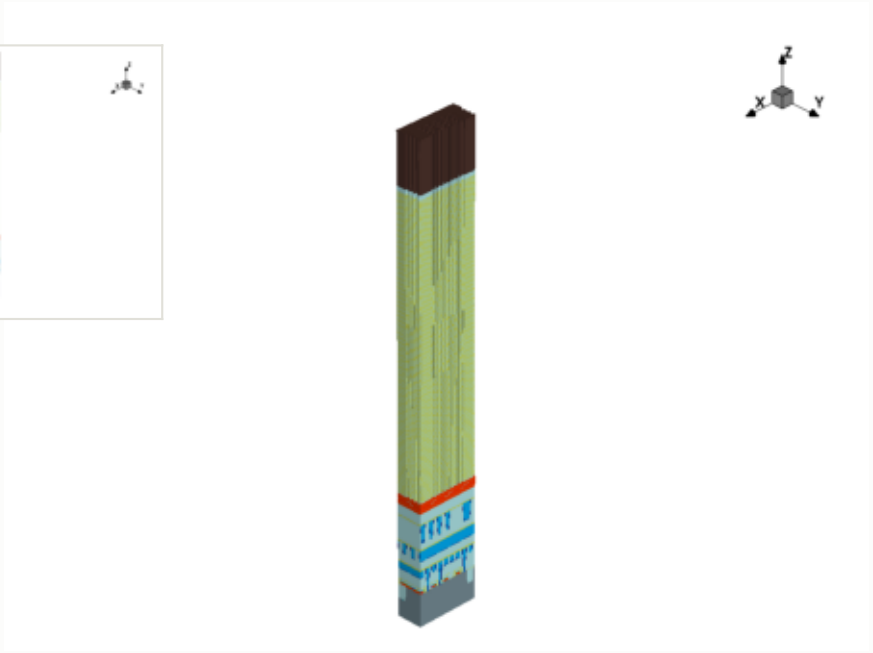

x cut at 0.000 µm

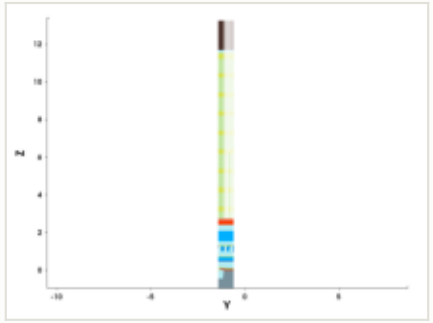

y cut at -1.035 µm

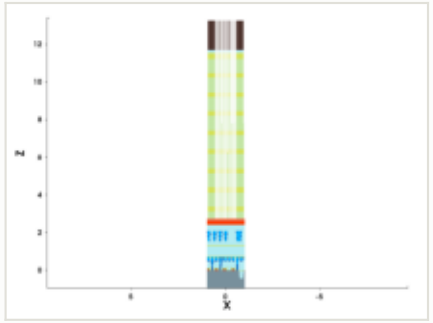

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

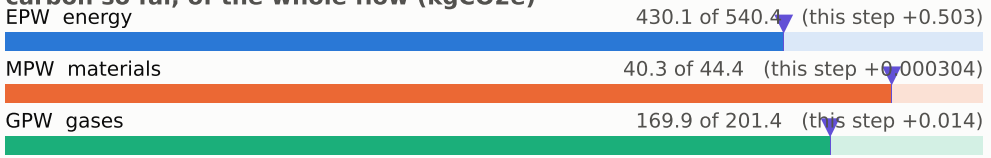


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

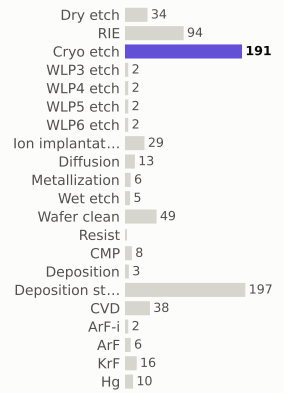

materials deposited (g)

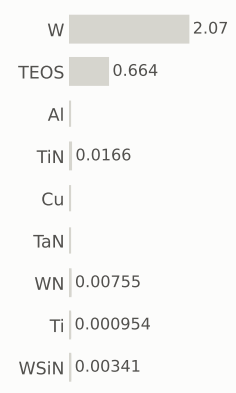

gases emitted (g)



Step #7289.7449: Cryo_etch


etch_noop · Cryo_etch

0.517	640.7	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




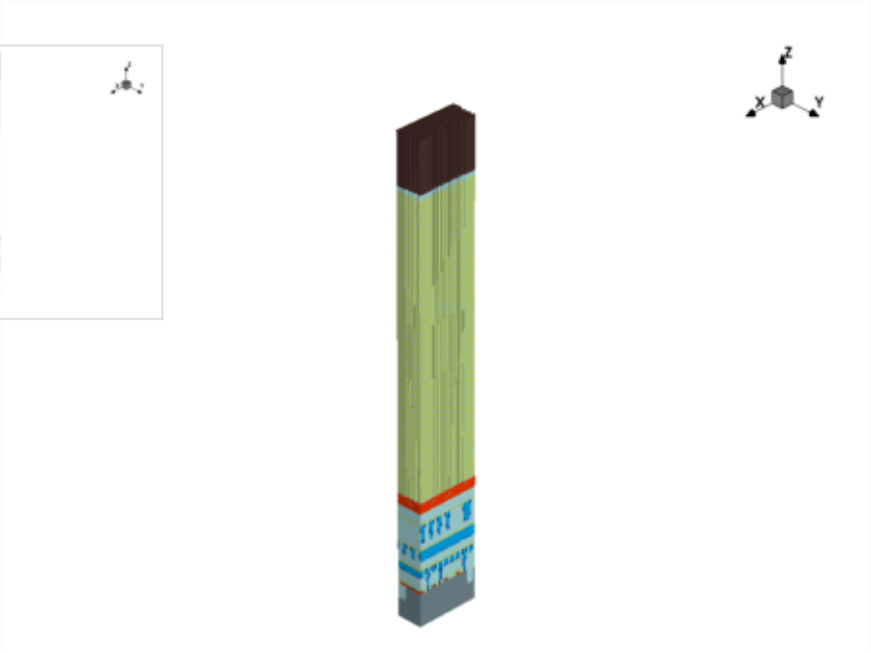

x cut at 0.000 µm

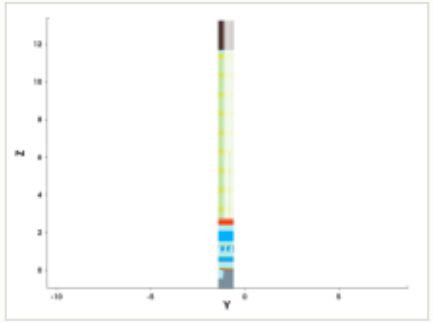

y cut at -1.035 µm

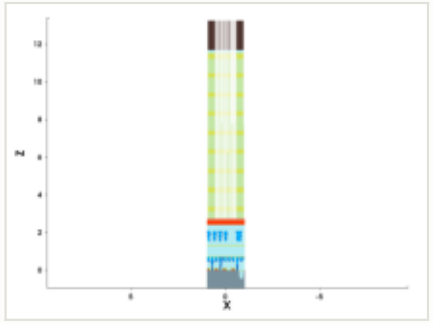

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

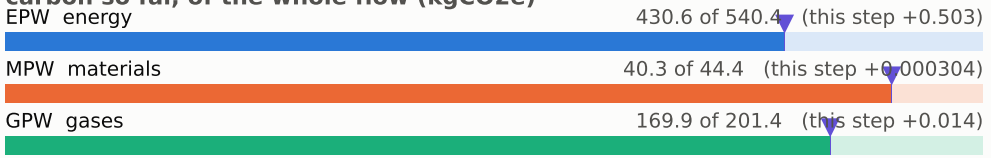


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

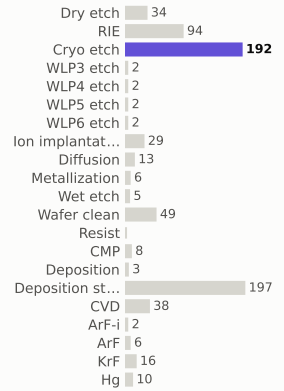

materials deposited (g)

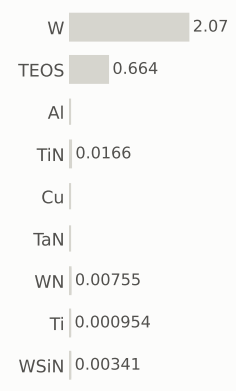

gases emitted (g)



Step #7289.7959: Cryo_etch


etch_noop · Cryo_etch

0.517	641.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




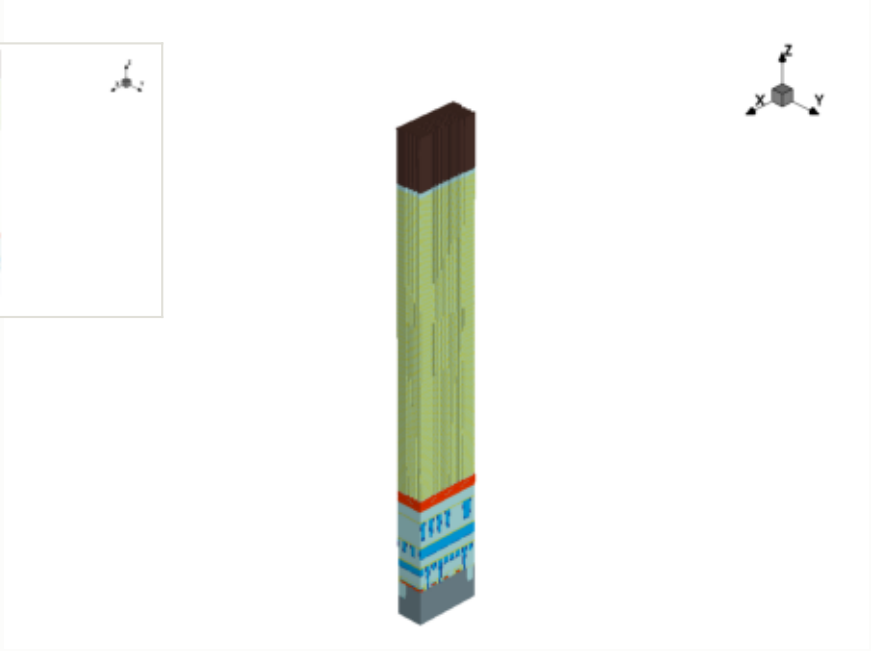

x cut at 0.000 µm

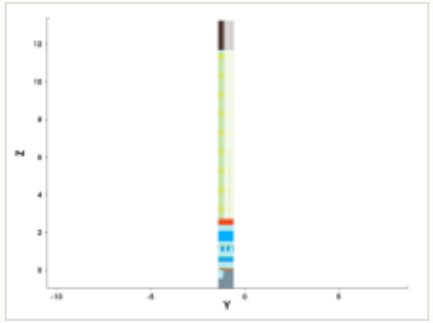

y cut at -1.035 µm

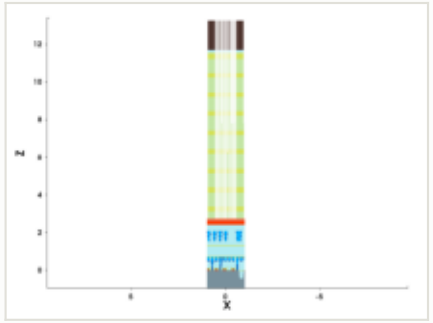

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

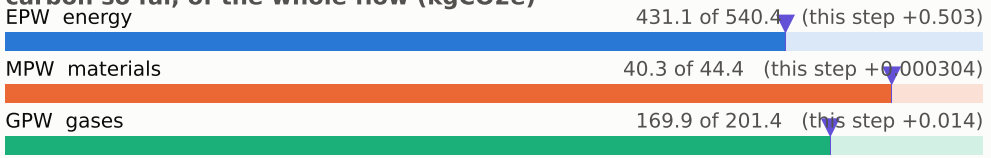


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

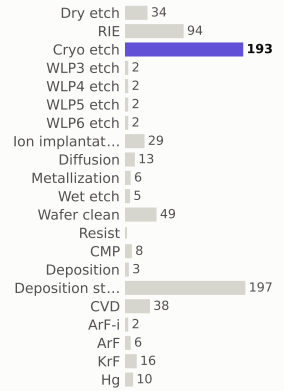

materials deposited (g)

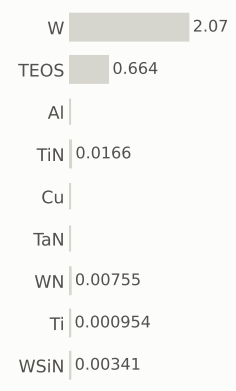

gases emitted (g)



Step #7289.8469: Cryo_etch


etch_noop · Cryo_etch

0.517	641.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




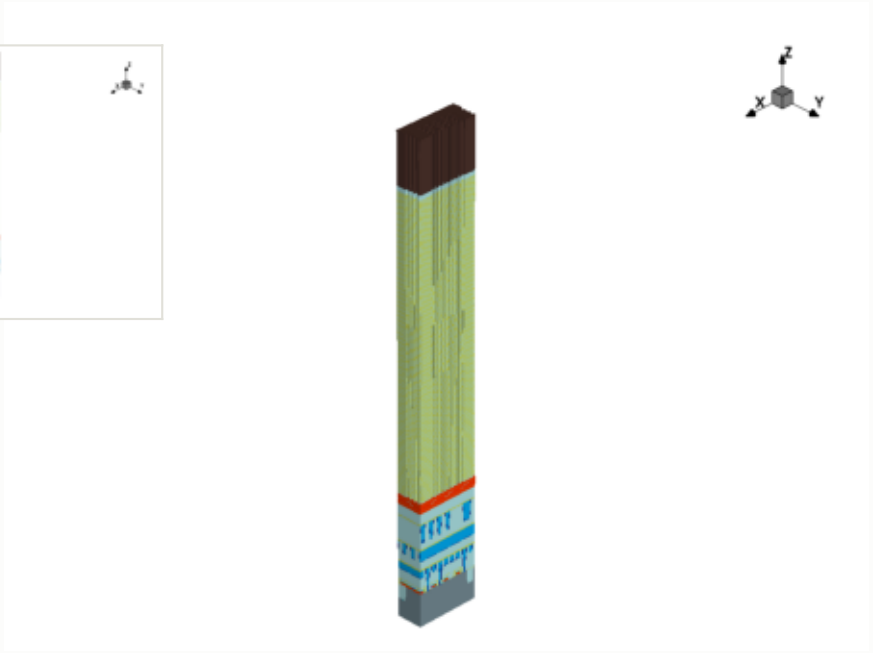

x cut at 0.000 µm

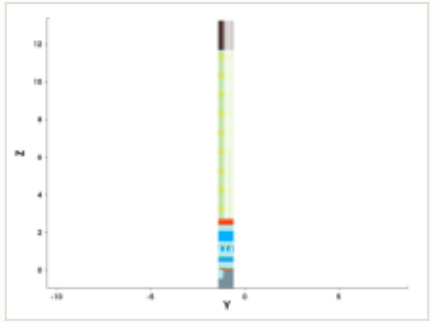

y cut at -1.035 µm

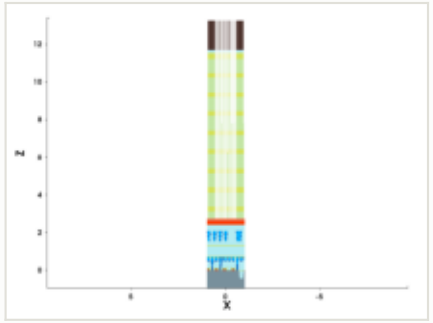

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

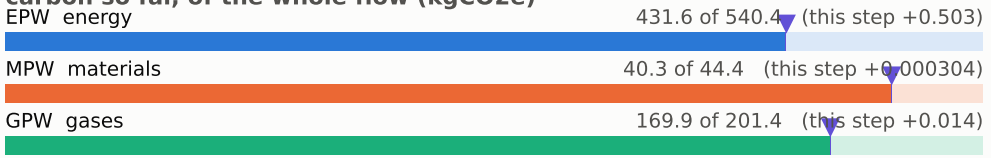


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

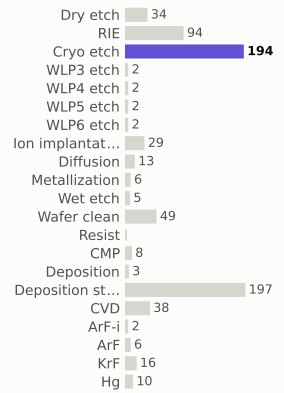

materials deposited (g)

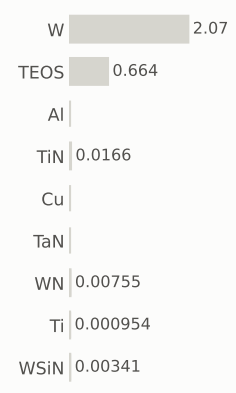

gases emitted (g)



Step #7289.898: Cryo_etch


etch_noop · Cryo_etch

0.517	642.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




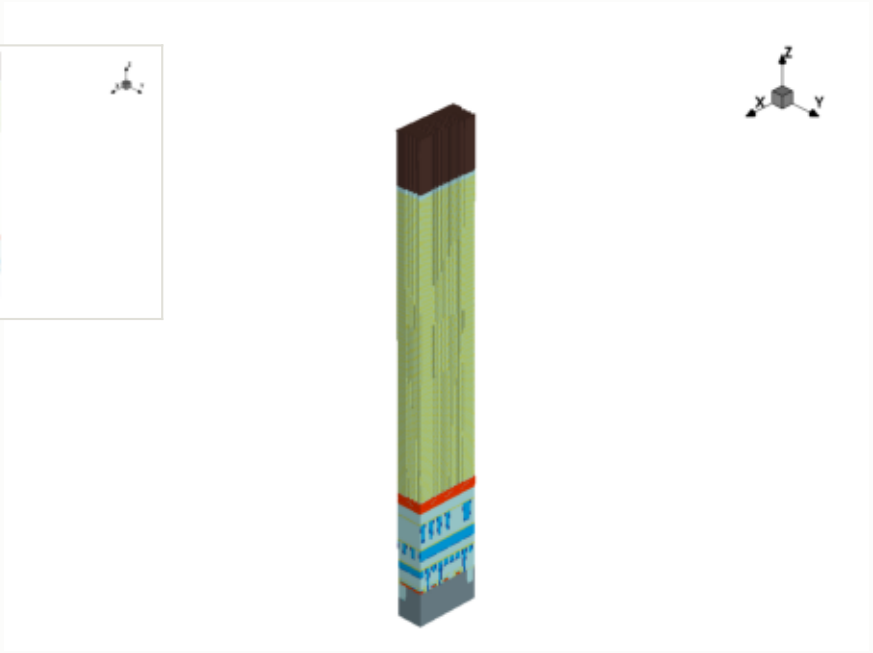

x cut at 0.000 µm

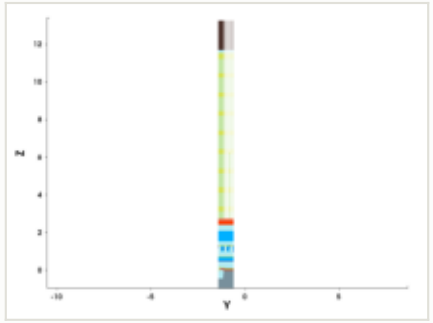

y cut at -1.035 µm

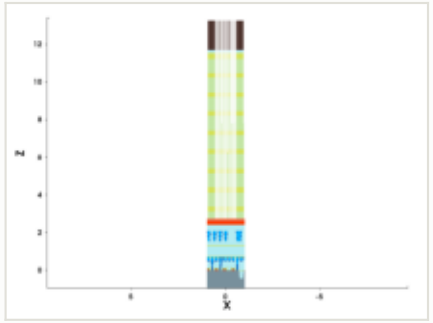

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

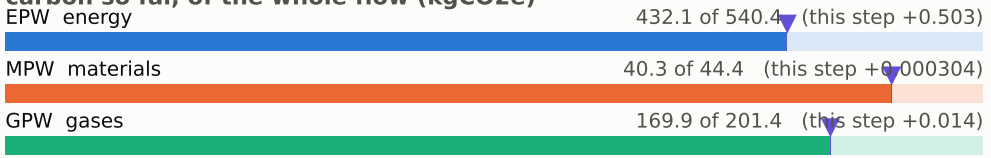


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

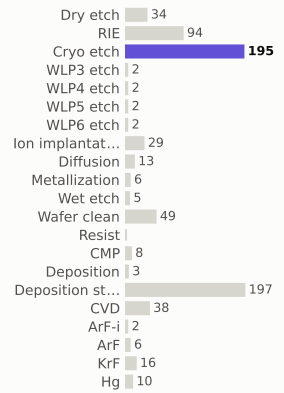

materials deposited (g)

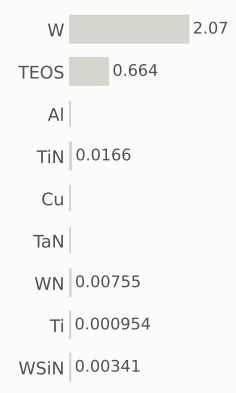

gases emitted (g)



Step #7289.949: Cryo_etch


etch_noop · Cryo_etch

0.517	642.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit




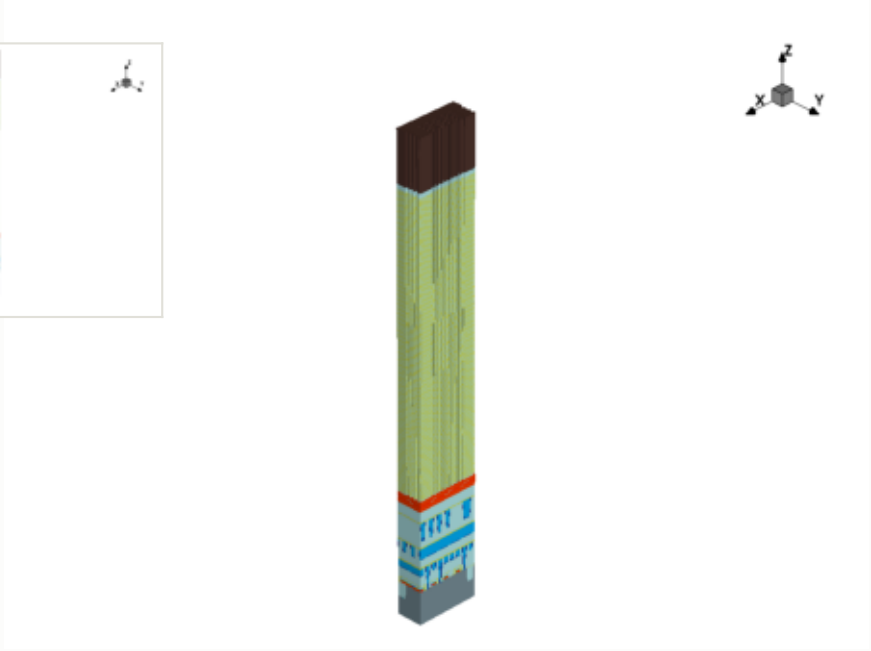

x cut at 0.000 µm

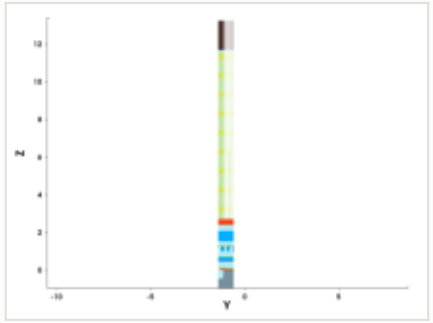

y cut at -1.035 µm

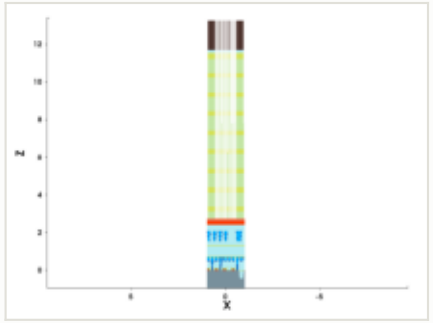

mask for this step


no mask for this step

this step


process area	Cryo_etch	EPW	0.503 kgCO2e
material	—	EPW tool	0.359 kgCO2e
thickness	—	EPW overhead	0.144 kgCO2e
material GWP	—	MPW	0.000304 kgCO2e (gas 0.000304)
input gases	CF4 0.0241 g	GPW	0.014 kgCO2e
energy	0.835 kWh + 0.334 overhead	embodied carbon	**0.517 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

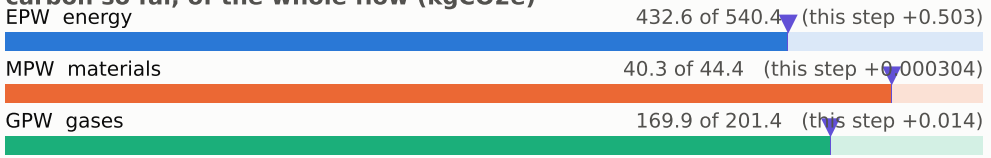


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

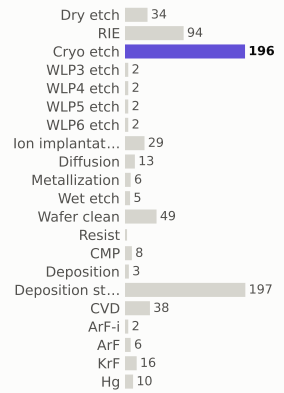

materials deposited (g)

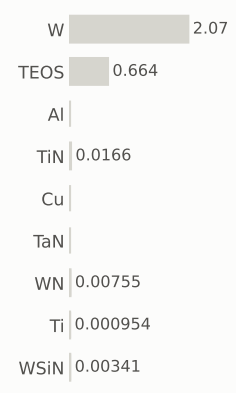

gases emitted (g)



Step #7290: RIE


etch_anisotropic · RIE

1.04	643.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



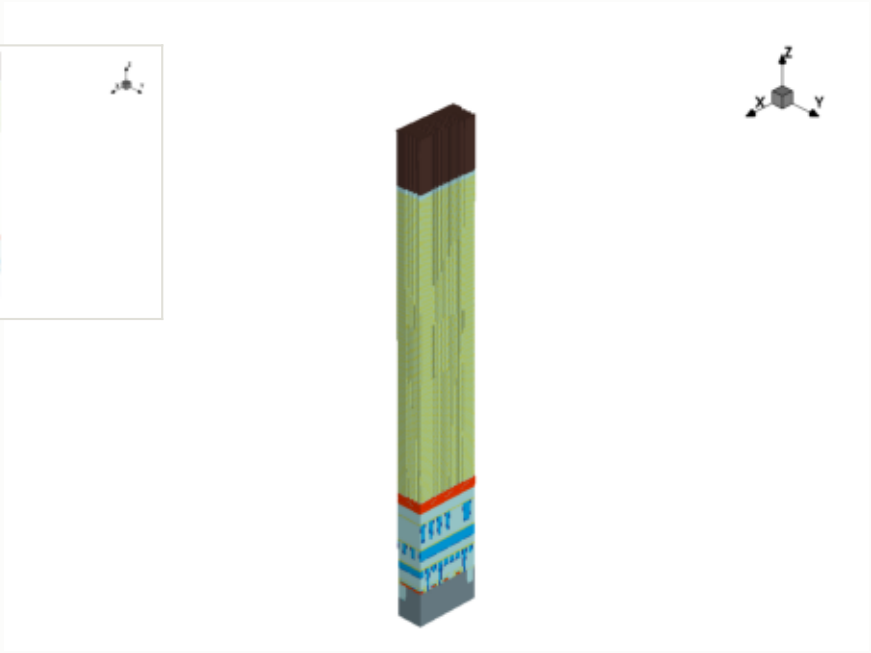


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

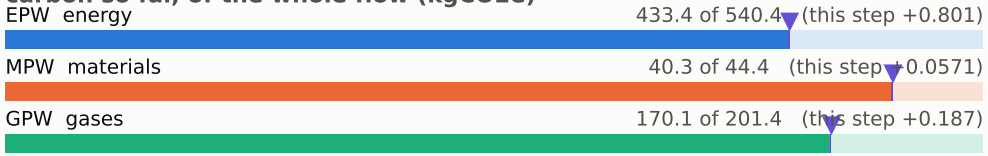


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

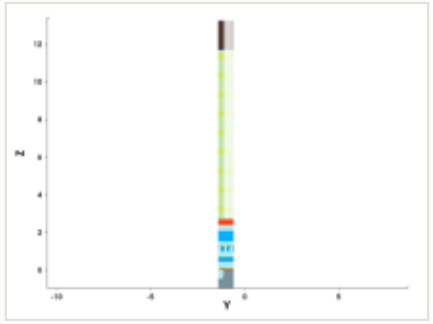


y cut at -1.035 µm

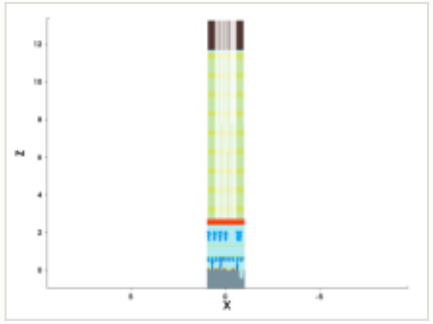


mask for this step

no mask for this step


steps by process area

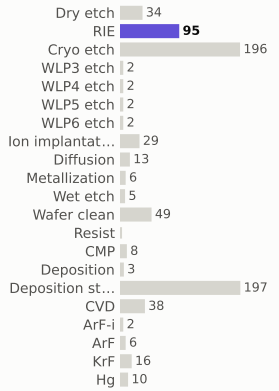

materials deposited (g)

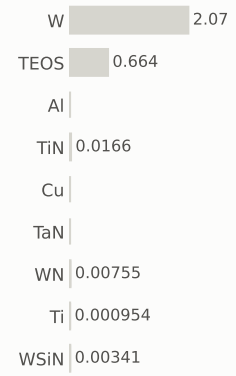

gases emitted (g)

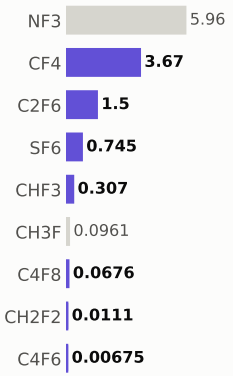

Step #7300: RIE


etch_anisotropic · RIE

1.04	644.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



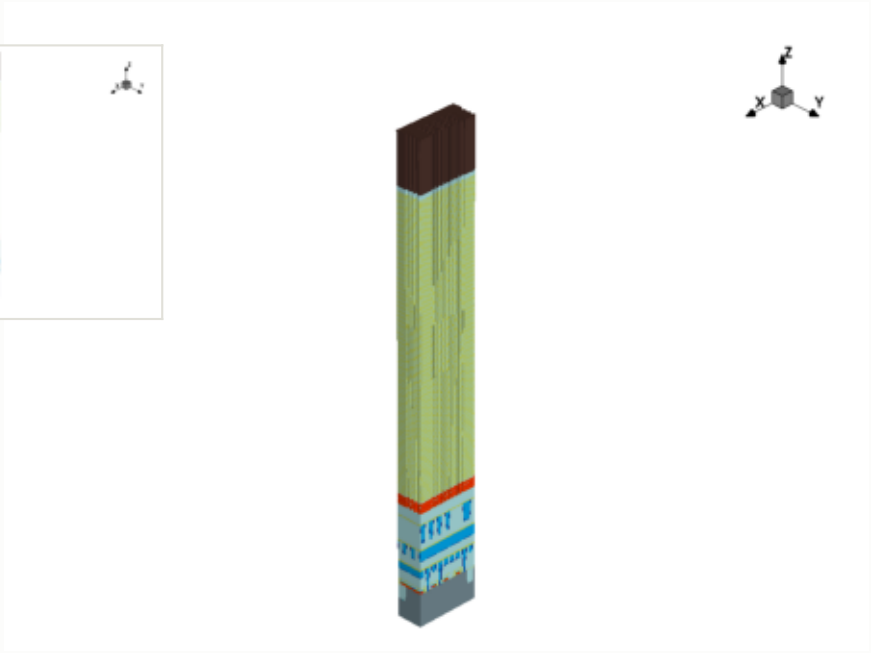


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

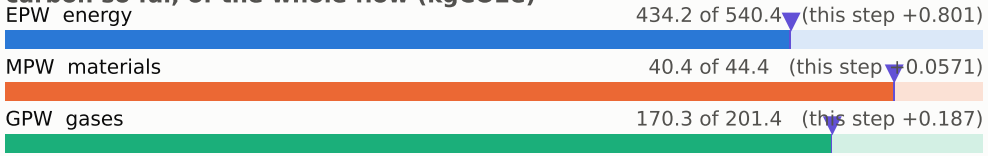


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

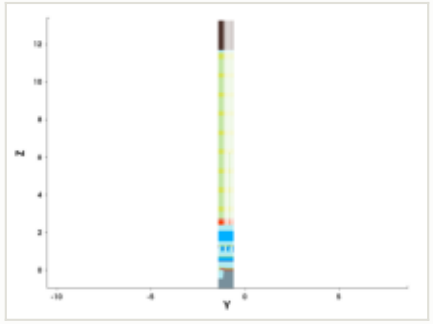


y cut at -1.035 µm

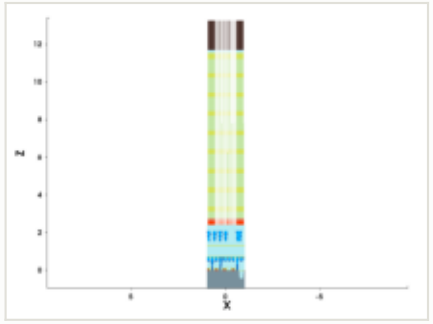


mask for this step

no mask for this step


steps by process area

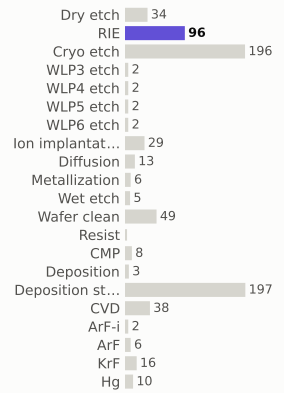

materials deposited (g)

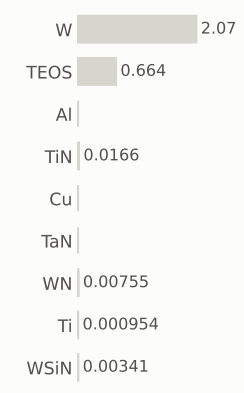

gases emitted (g)



Step #7310: RIE


etch_anisotropic · RIE

1.04	645.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



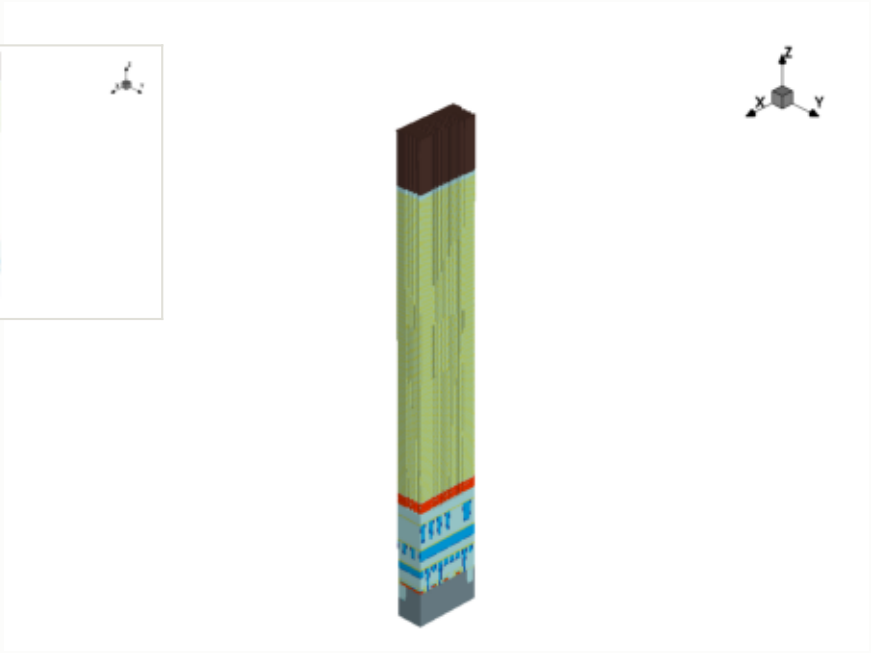


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

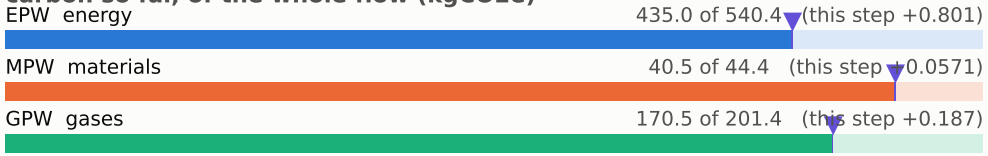


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

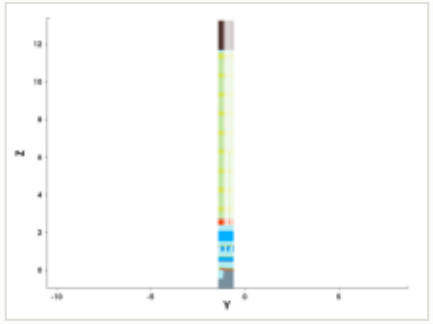


y cut at -1.035 µm

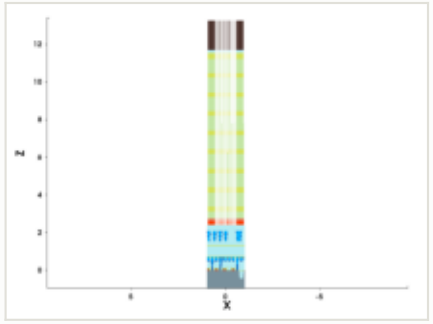


mask for this step

no mask for this step


steps by process area

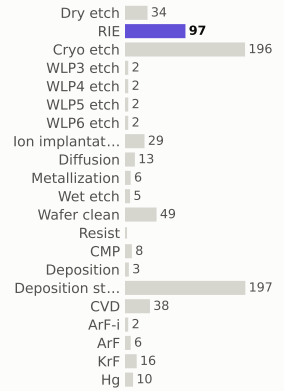

materials deposited (g)

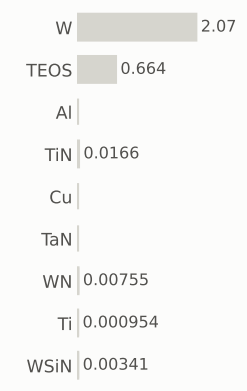

gases emitted (g)



Step #7320: Dry_etch


etch_strip · Dry_etch

0.801	646.7	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



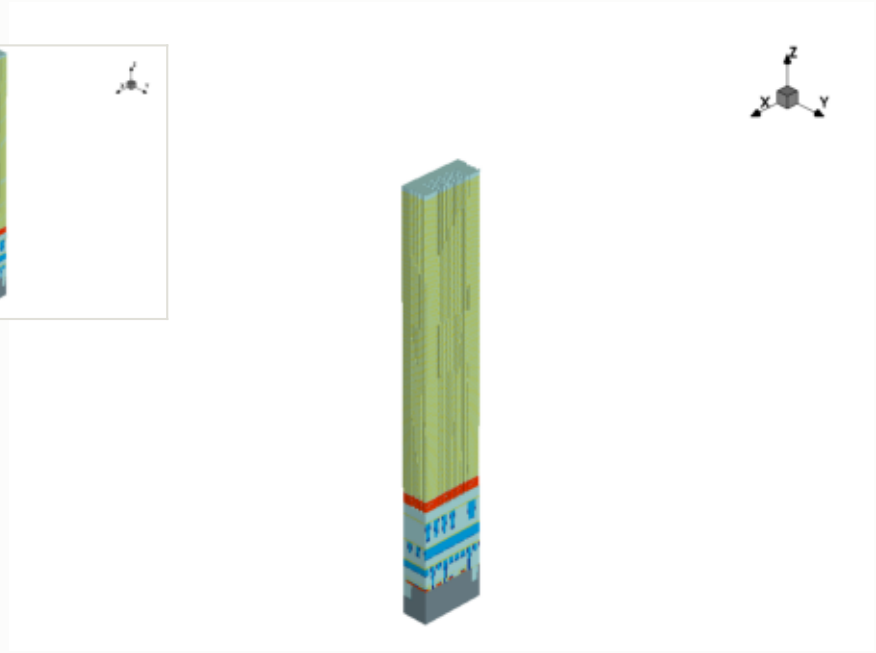


this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

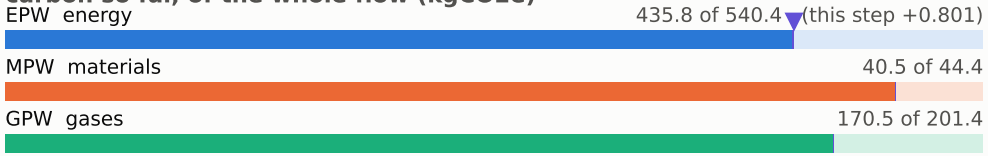


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

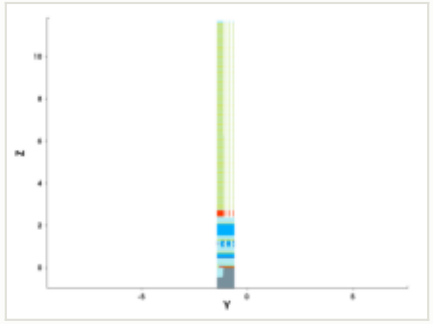


y cut at -1.035 µm

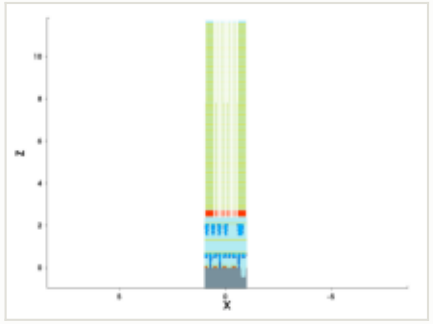


mask for this step

no mask for this step


steps by process area

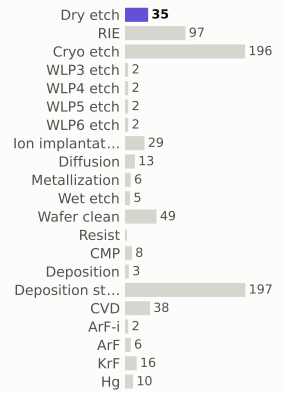

materials deposited (g)

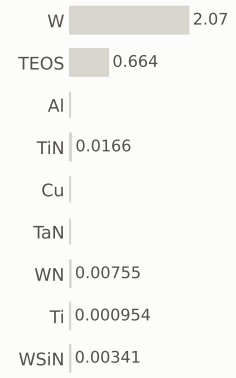

gases emitted (g)



Step #7330: Wafer_clean

clean · Wafer_clean

0.169	646.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

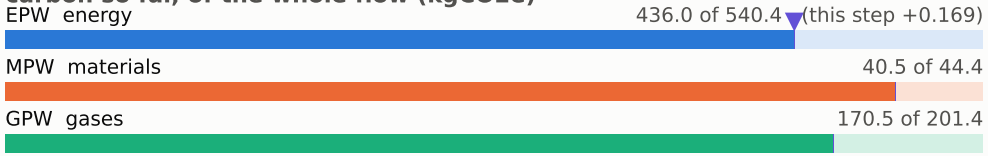


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

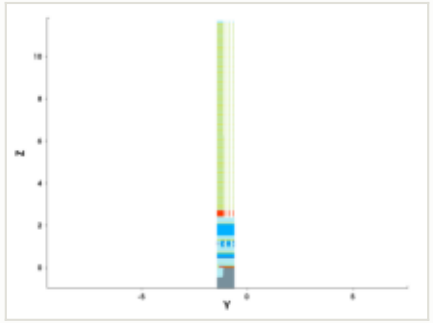


y cut at -1.035 µm

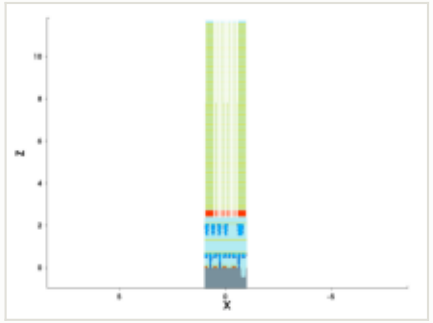


mask for this step

no mask for this step


steps by process area

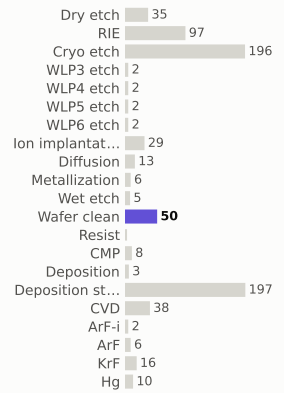

materials deposited (g)

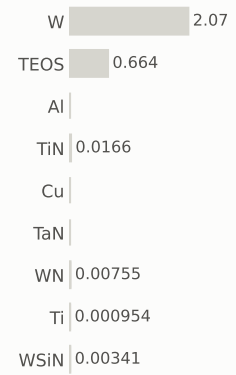

gases emitted (g)



Step #7340: Wet_etch


etch_isotropic · Wet_etch

0.169	647.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



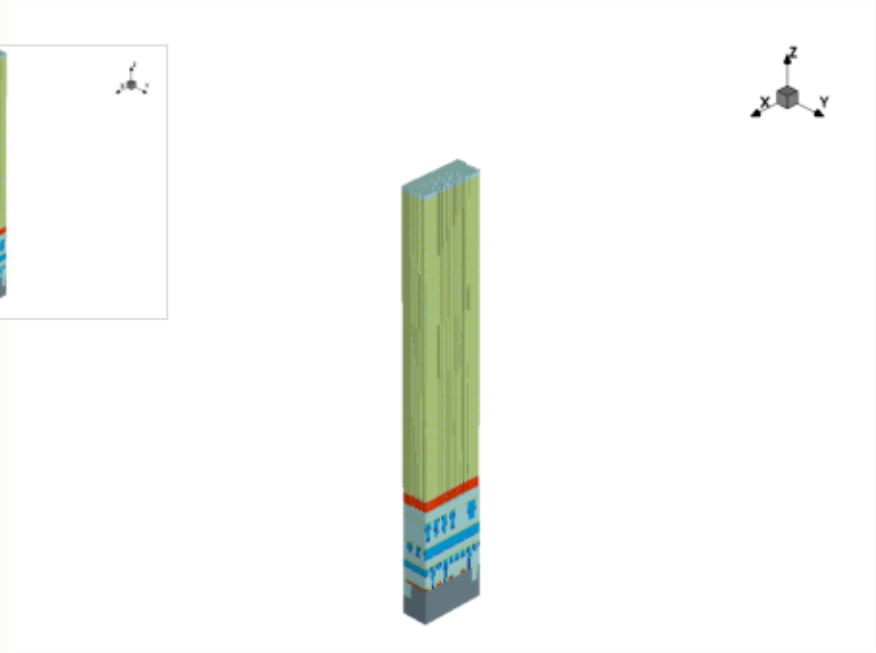


this step

process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

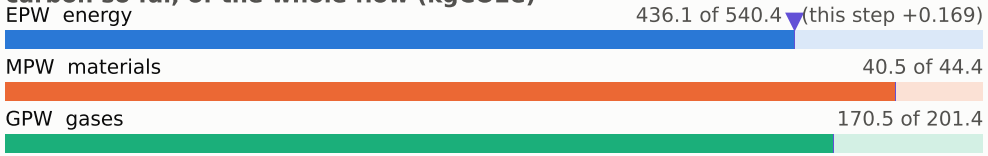


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

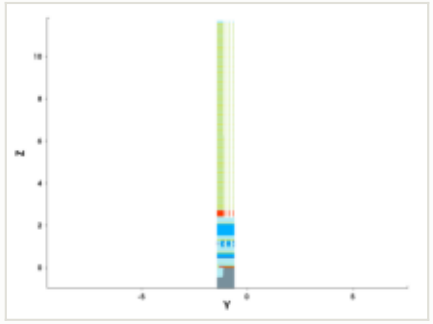


y cut at -1.035 µm

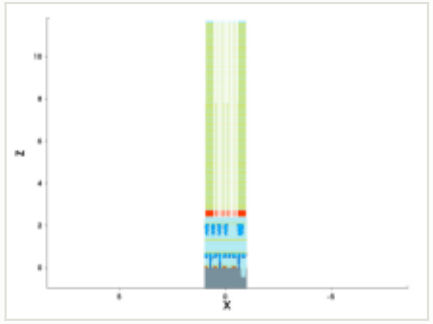


mask for this step

no mask for this step


steps by process area

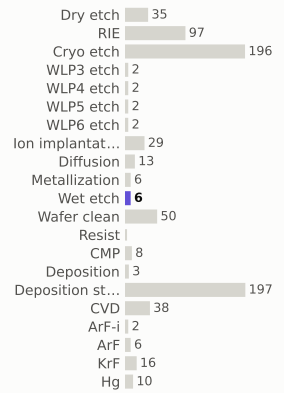

materials deposited (g)

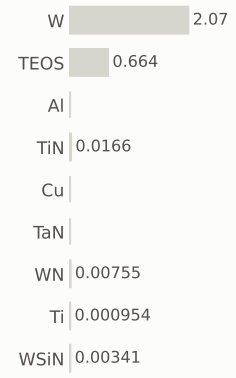

gases emitted (g)



Step #7350: Wafer_clean


clean · Wafer_clean

0.169	647.3	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



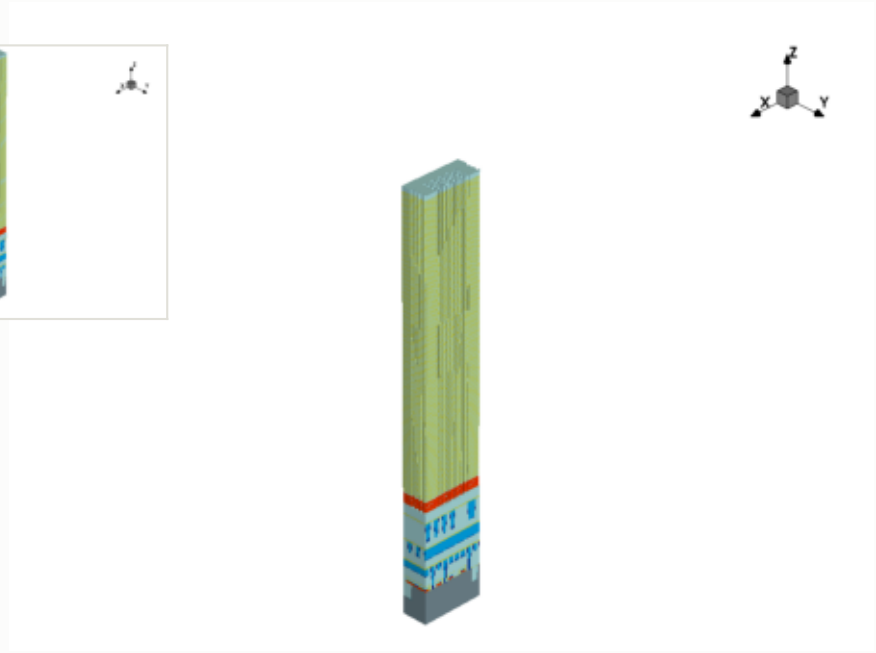


this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

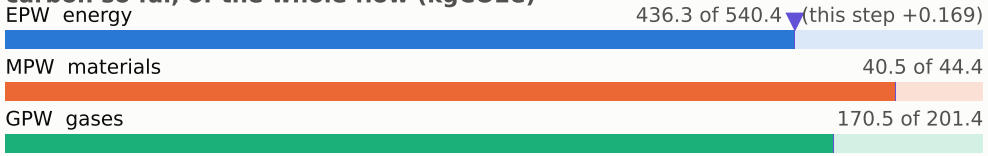


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

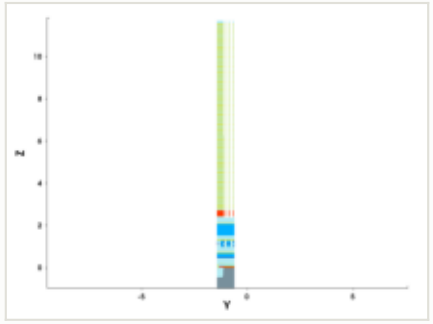


y cut at -1.035 µm

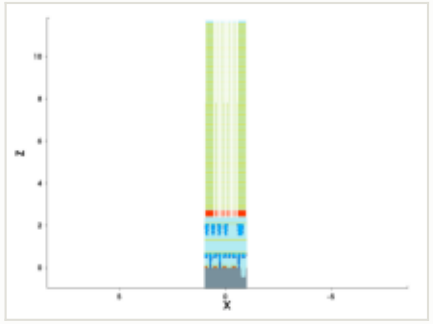


mask for this step

no mask for this step


steps by process area

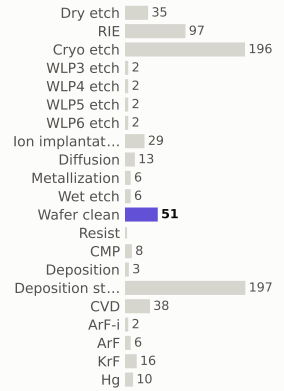

materials deposited (g)

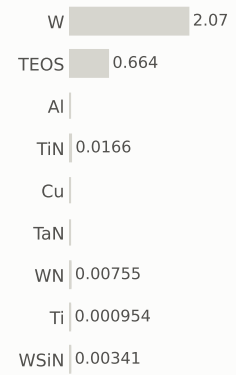

gases emitted (g)

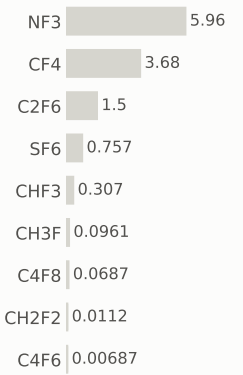

Step #7360: CVD

depo_isotropic · CVD

1.31	648.6	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.008 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

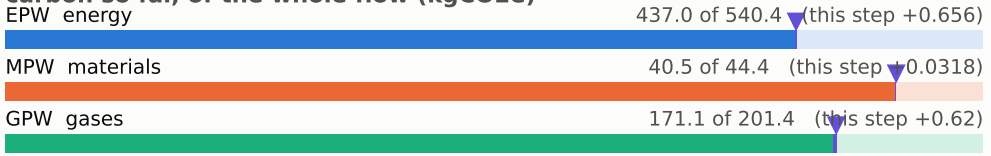


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

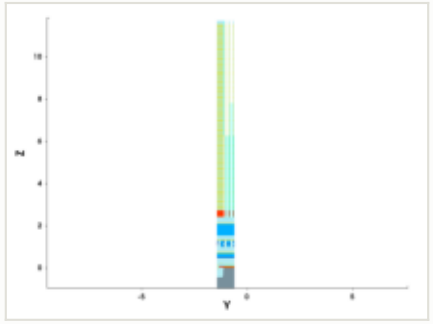


y cut at -1.035 µm

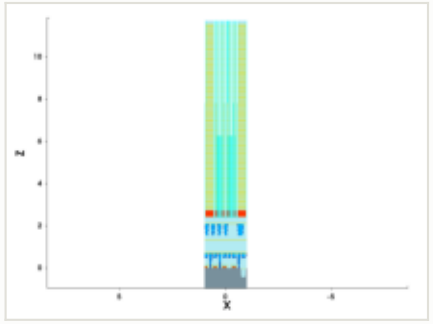


mask for this step

no mask for this step


steps by process area

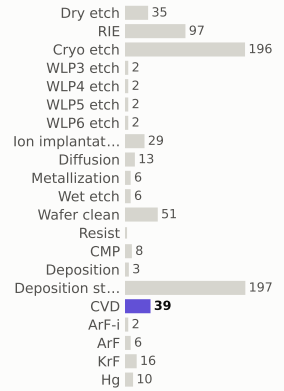

materials deposited (g)

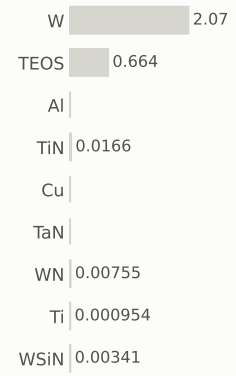

gases emitted (g)

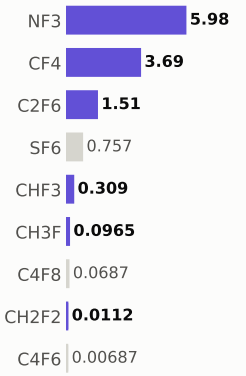

Step #7370: CVD

depo_isotropic · CVD

1.31	649.9	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.006 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

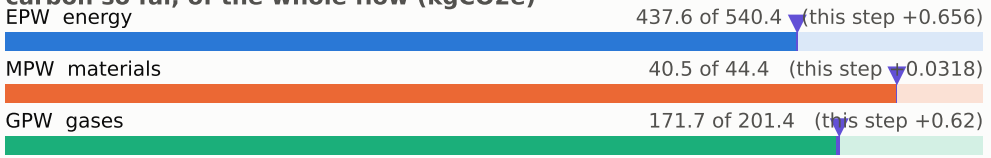


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

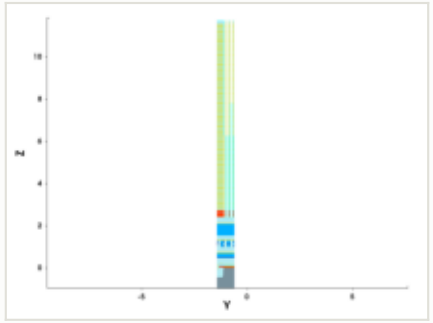


y cut at -1.035 µm

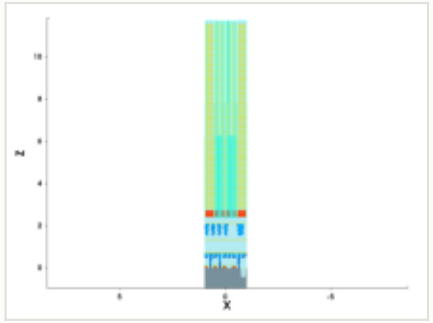


mask for this step

no mask for this step


steps by process area

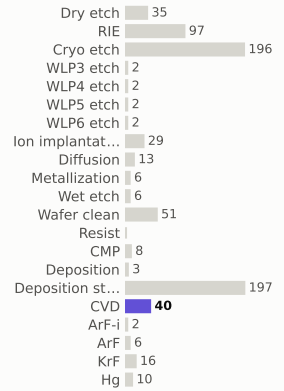

materials deposited (g)

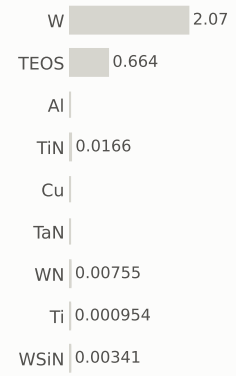

gases emitted (g)



Step #7380: CVD

depo_isotropic · CVD

1.31	651.2	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.004 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

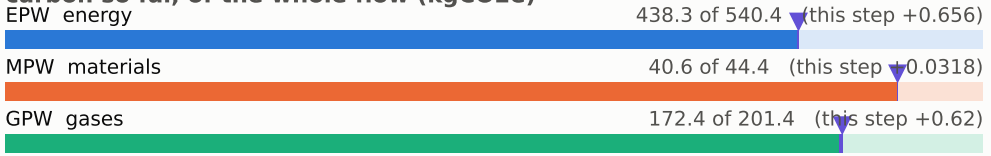


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

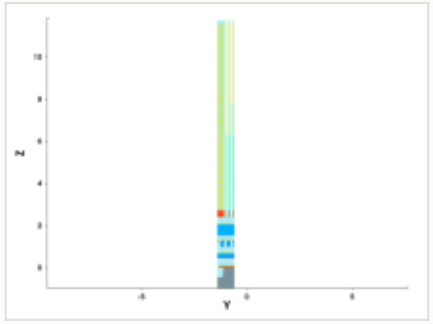


y cut at -1.035 µm

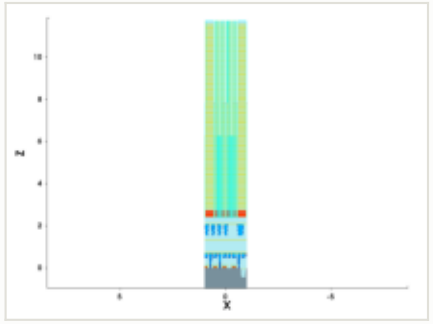


mask for this step

no mask for this step


steps by process area

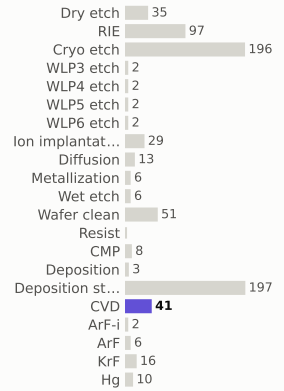

materials deposited (g)

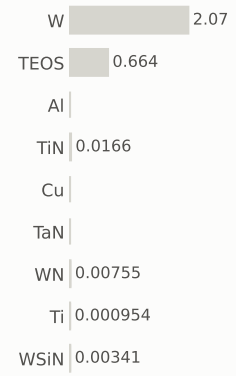

gases emitted (g)

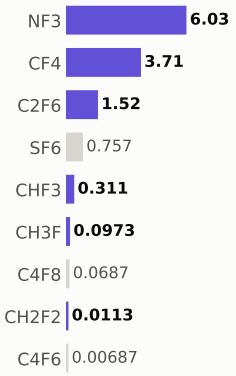

Step #7390: CVD

depo_isotropic · CVD

1.31	652.5	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CVD
material	—
thickness	0.008 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

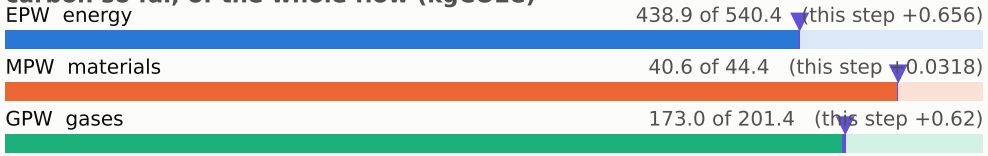


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

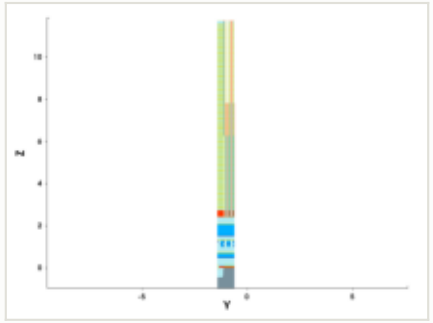


y cut at -1.035 µm

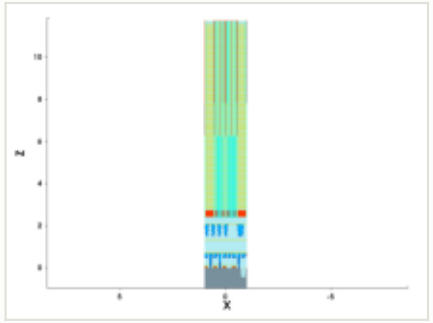


mask for this step

no mask for this step


steps by process area

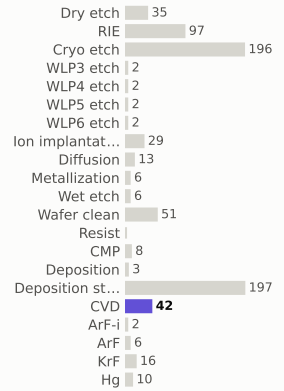

materials deposited (g)

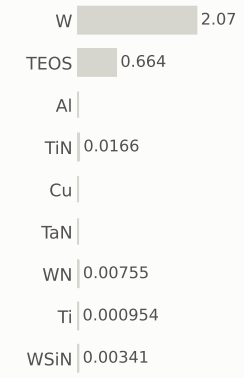

gases emitted (g)

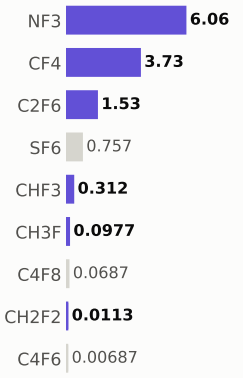

Step #7400: CVD


depo_isotropic · CVD

1.31	653.8	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CVD
material	—
thickness	0.07 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

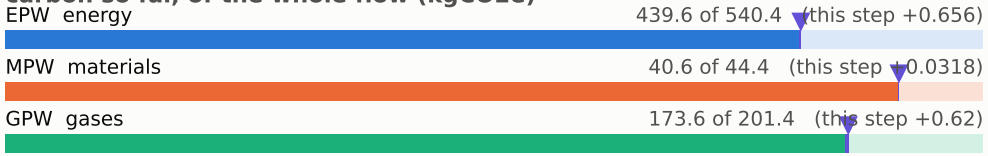


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

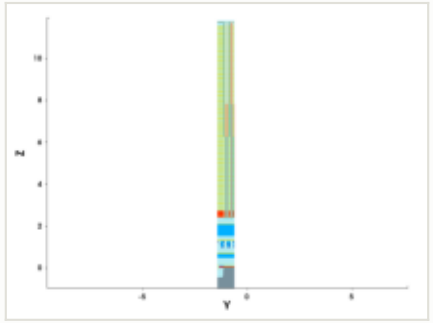


y cut at -1.035 µm

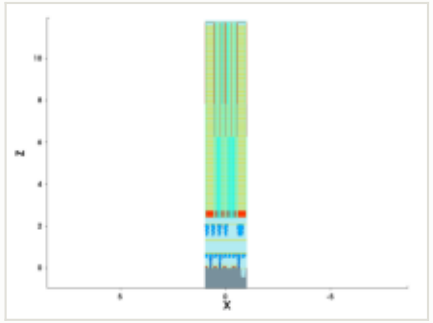


mask for this step

no mask for this step


steps by process area

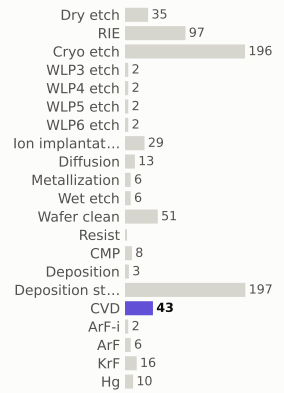

materials deposited (g)

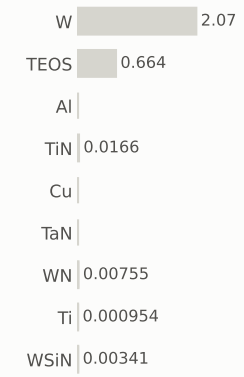

gases emitted (g)

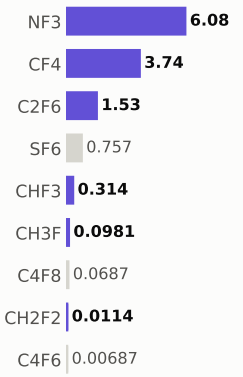

Step #7410: CMP

etch_cmp · CMP

0.169	654.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

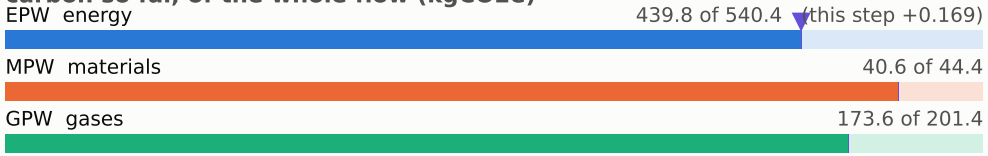


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

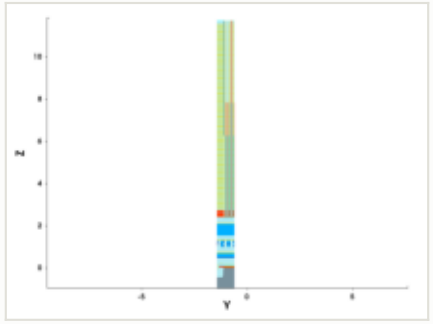


y cut at -1.035 µm

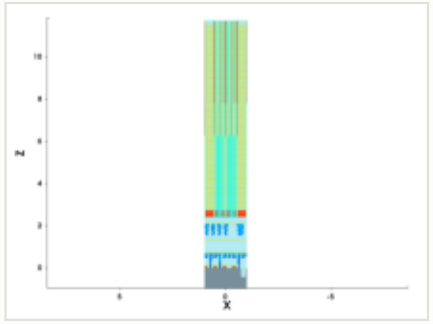


mask for this step

no mask for this step


steps by process area

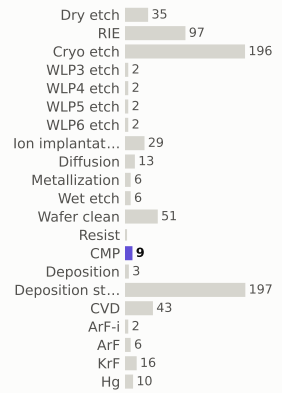

materials deposited (g)

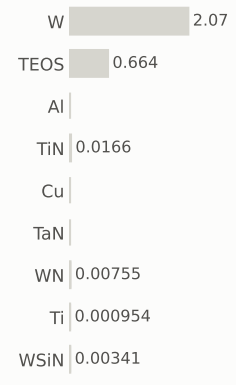

gases emitted (g)



Step #7420: Wafer_clean

clean · Wafer_clean

0.169	654.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

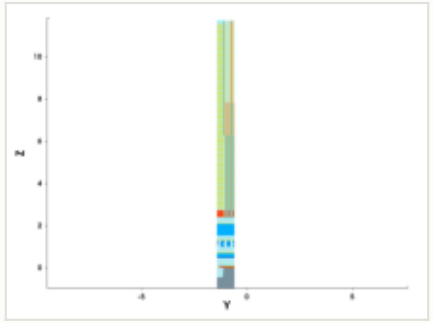

y cut at -1.035 µm

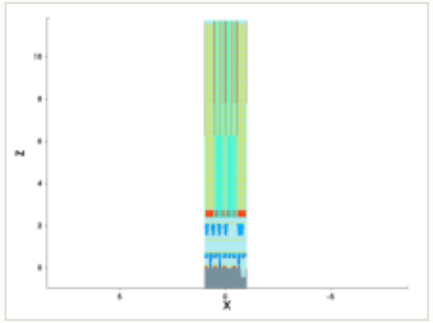

mask for this step


no mask for this step

this step


process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

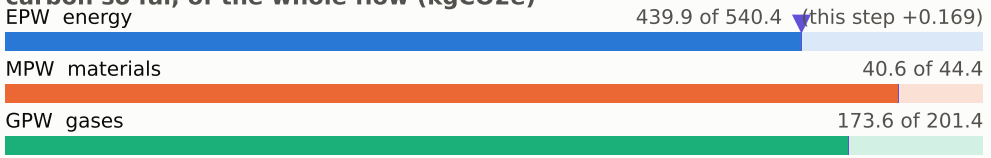


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

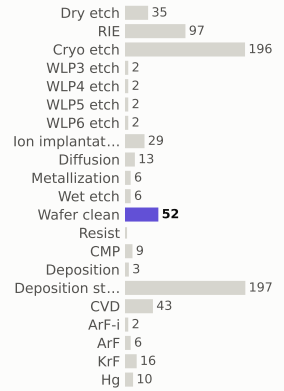

materials deposited (g)

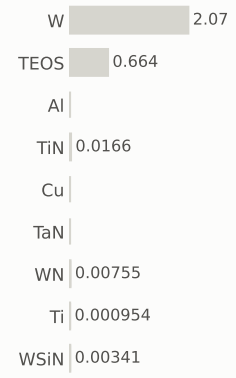

gases emitted (g)



Step #7430: RIE

etch_anisotropic · RIE

1.04	655.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

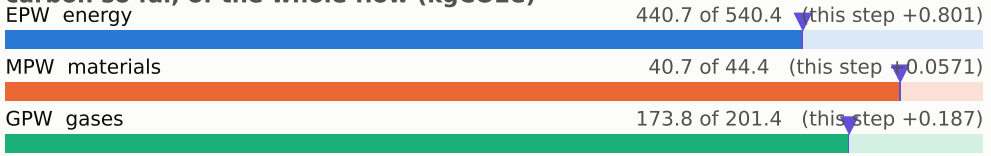


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

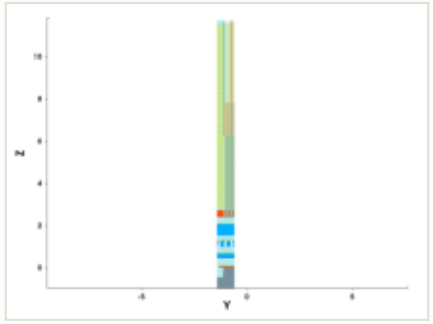


y cut at -1.035 µm

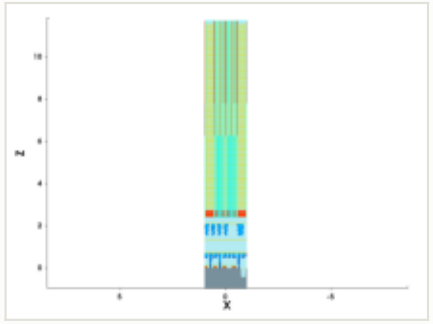


mask for this step

no mask for this step


steps by process area

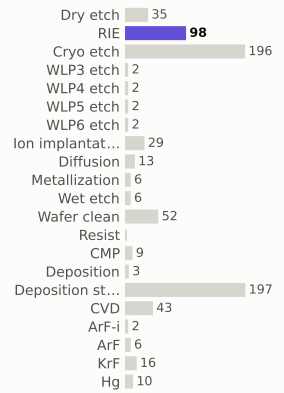

materials deposited (g)

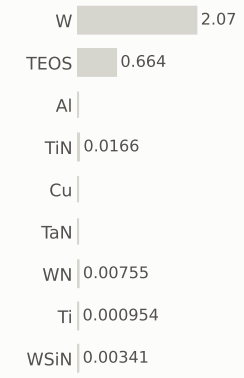

gases emitted (g)

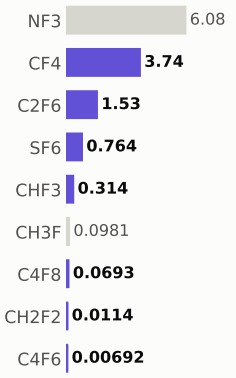

Step #7440: Wafer_clean

clean · Wafer_clean

0.169	655.3	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

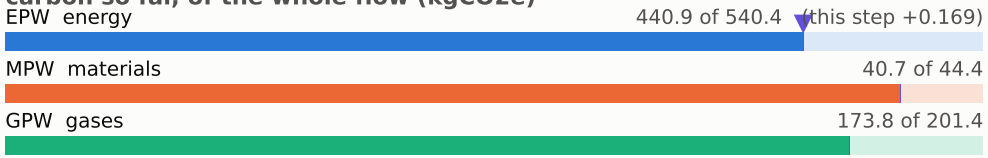


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

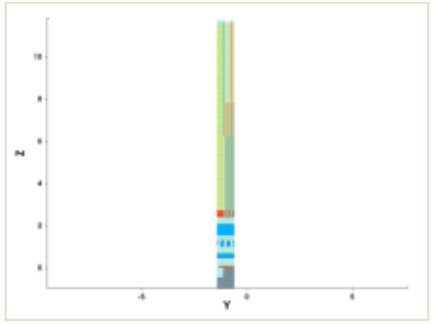


y cut at -1.035 µm

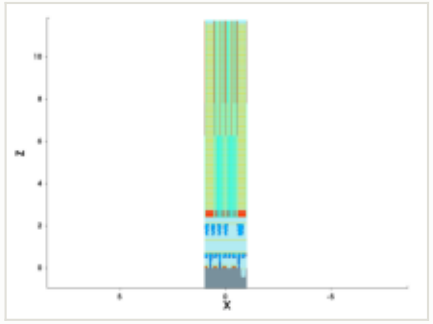


mask for this step

no mask for this step


steps by process area

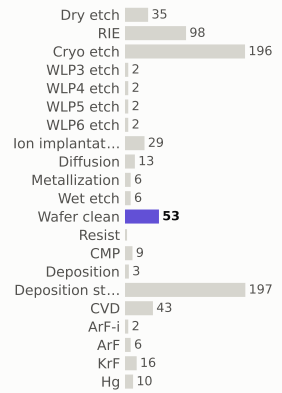

materials deposited (g)

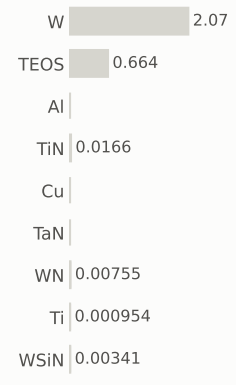

gases emitted (g)



Step #7450: CVD

depo_isotropic · CVD

1.31	656.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

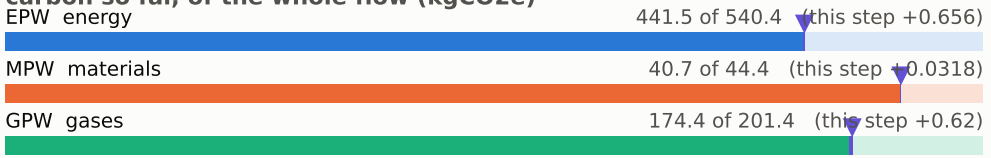


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

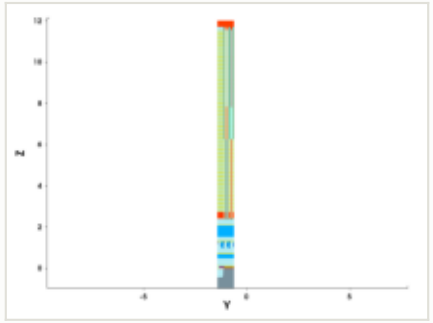


y cut at -1.035 µm

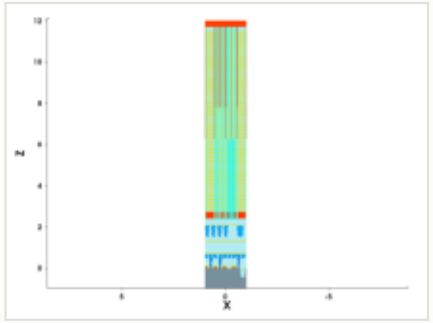


mask for this step

no mask for this step


steps by process area

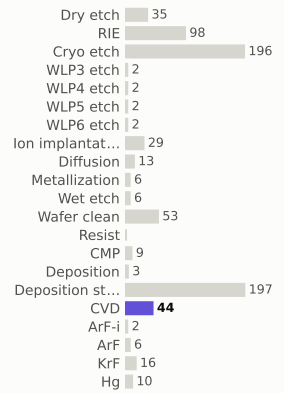

materials deposited (g)



gases emitted (g)



Step #7460: CMP

etch_cmp · CMP

0.169	656.8	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

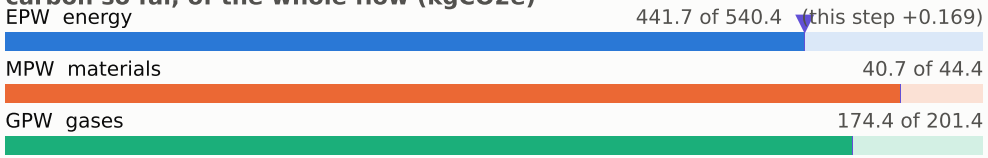


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

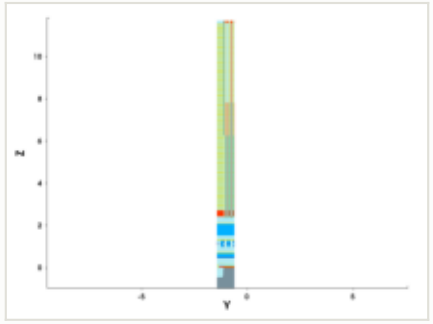


y cut at -1.035 µm

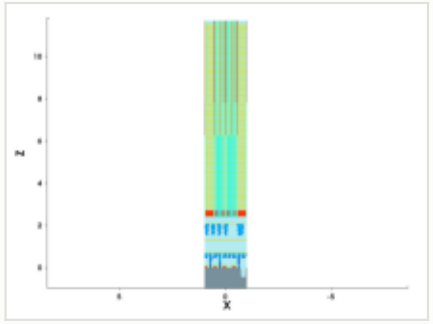


mask for this step

no mask for this step


steps by process area

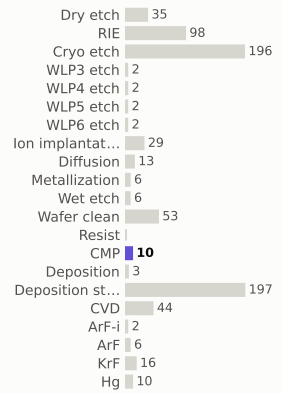

materials deposited (g)

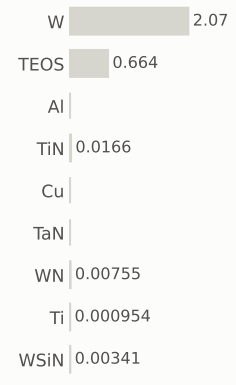

gases emitted (g)



Step #7470: Wafer_clean

clean · Wafer_clean

0.169	657.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

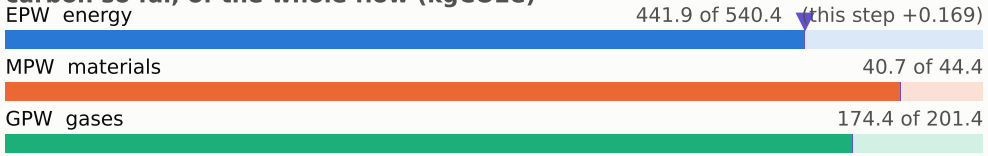


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

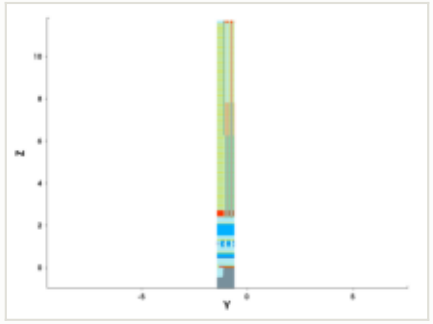


y cut at -1.035 µm

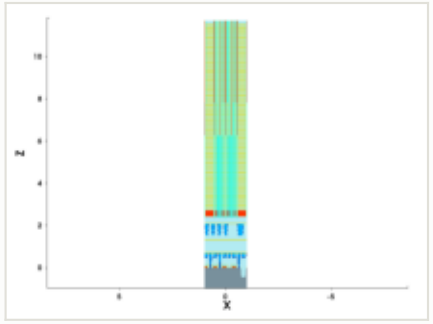


mask for this step

no mask for this step


steps by process area

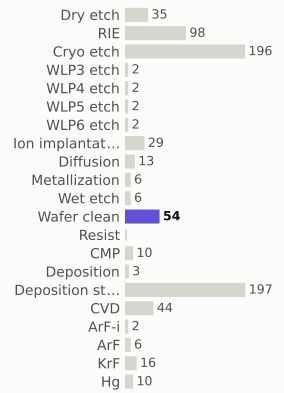

materials deposited (g)

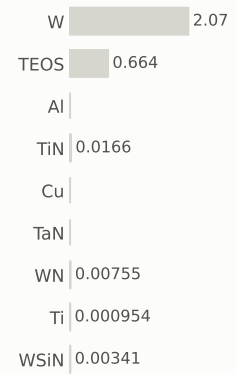

gases emitted (g)



Step #7480: RIE

etch_isotropic · RIE

1.04	658.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

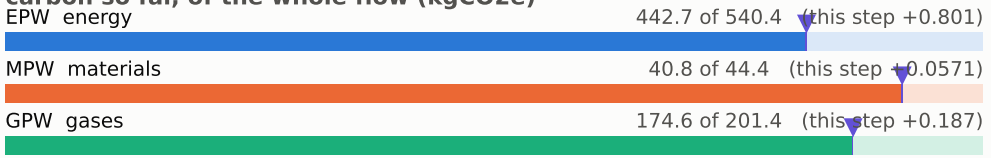


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

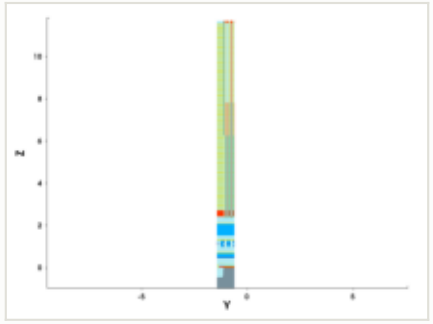


y cut at -1.035 µm

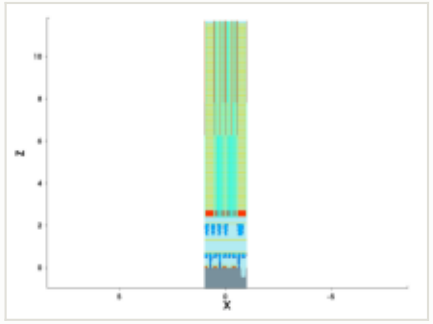


mask for this step

no mask for this step


steps by process area

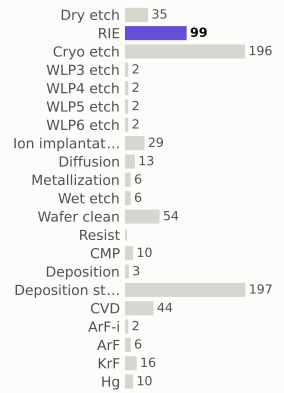

materials deposited (g)

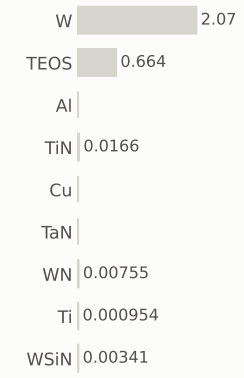

gases emitted (g)

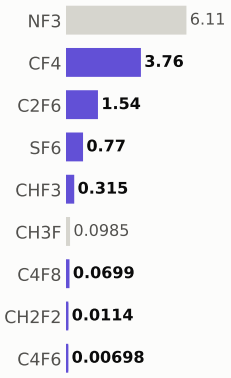

Step #7490: CVD

depo_isotropic · CVD

1.31	659.3	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.07 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

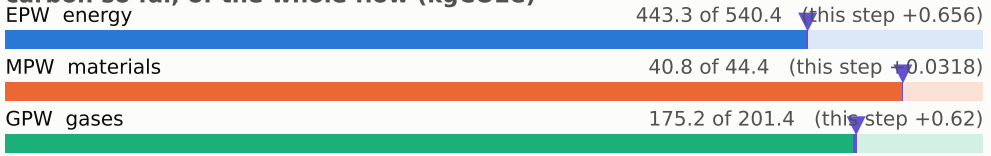


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

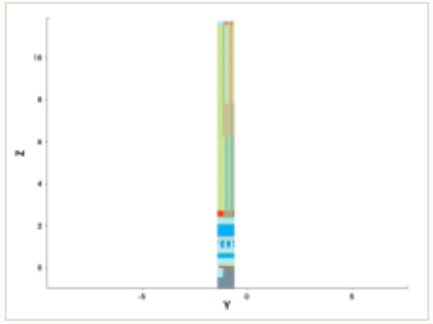


y cut at -1.035 µm

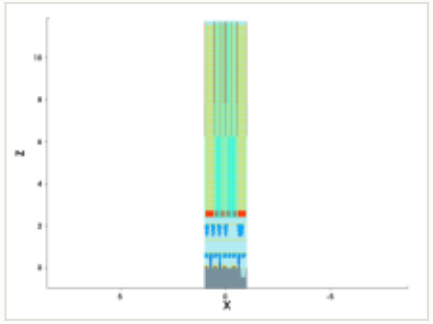


mask for this step

no mask for this step


steps by process area

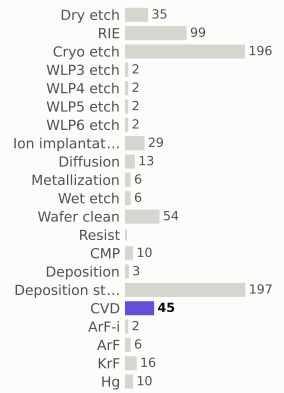

materials deposited (g)



gases emitted (g)

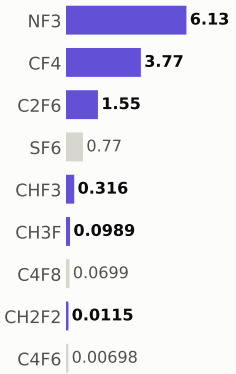

Step #7500: CMP

etch_cmp · CMP

0.169	659.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

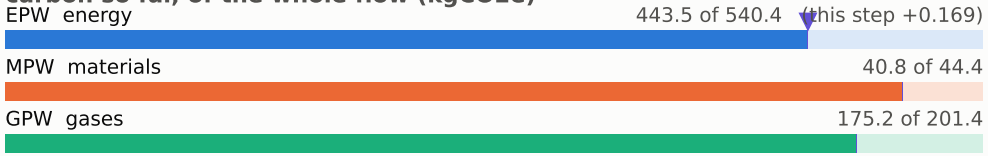


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

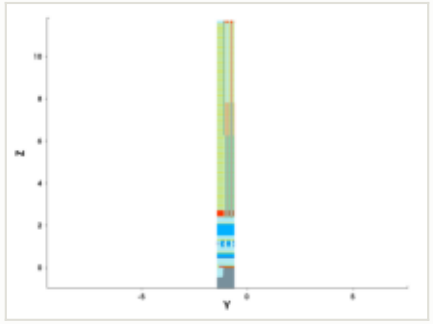


y cut at -1.035 µm

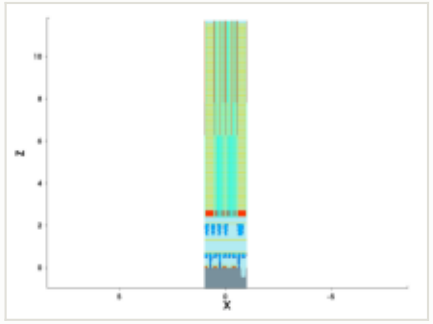


mask for this step

no mask for this step


steps by process area

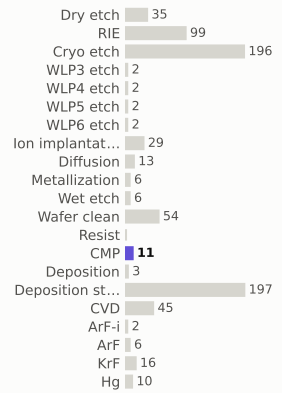

materials deposited (g)

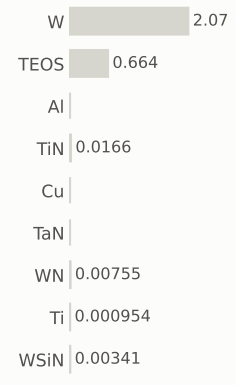

gases emitted (g)



Step #7510: Wafer_clean

clean · Wafer_clean

0.169	659.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

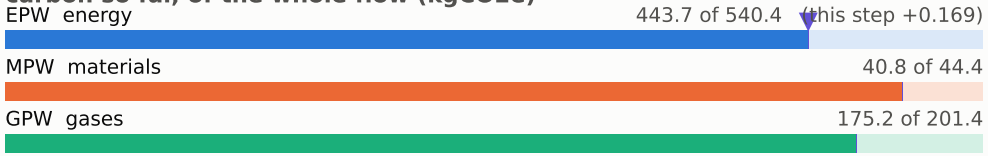


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

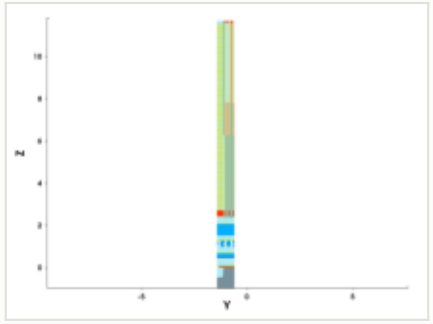


y cut at -1.035 µm

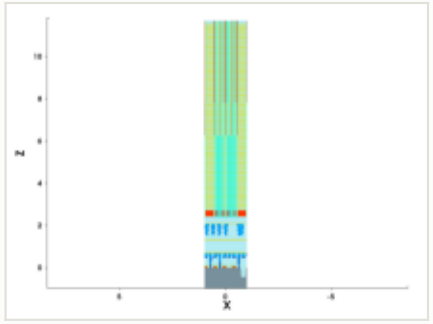


mask for this step

no mask for this step


steps by process area

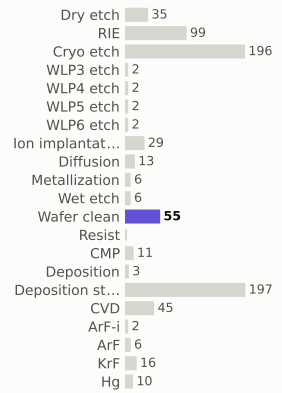

materials deposited (g)

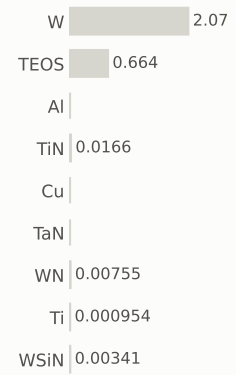

gases emitted (g)



Step #7530: CVD

depo_isotropic · CVD

1.31	661.0	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.003 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

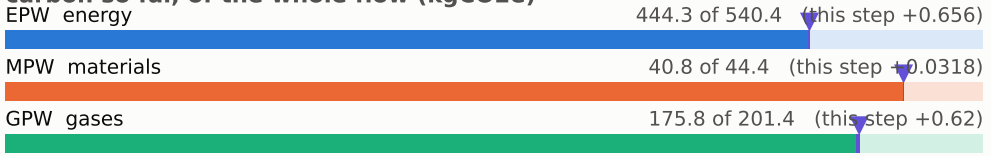


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

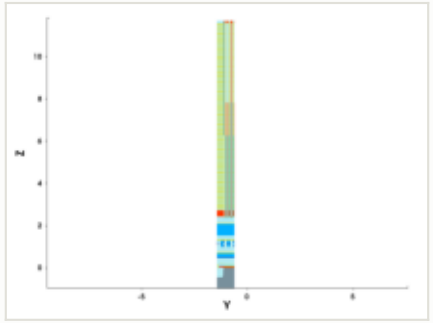


y cut at -1.035 µm

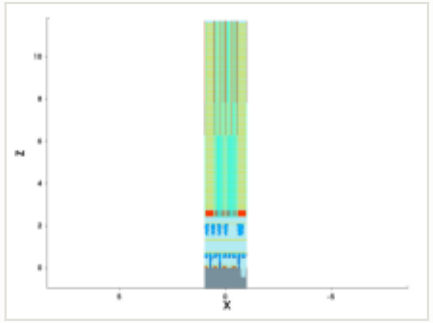


mask for this step

no mask for this step


steps by process area

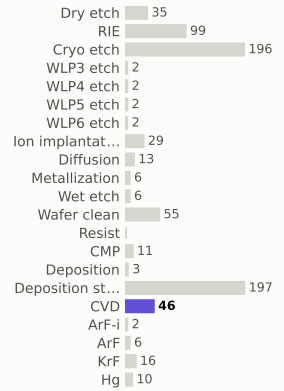

materials deposited (g)



gases emitted (g)



Step #7540: ArF

litho_patterning · ArF

0.199	661.2	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

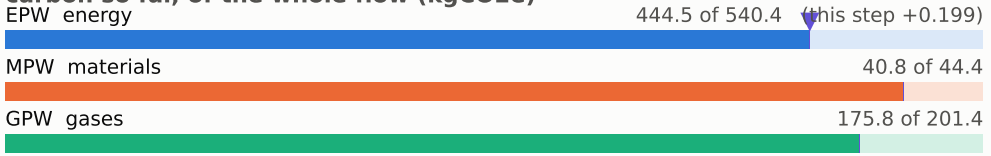


embodied carbon up to each step (kgCO2e per wafer)




x cut at 0.000 µm

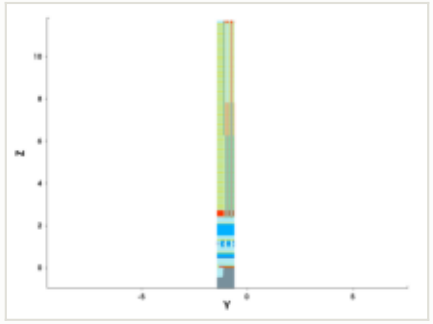


y cut at -1.035 µm

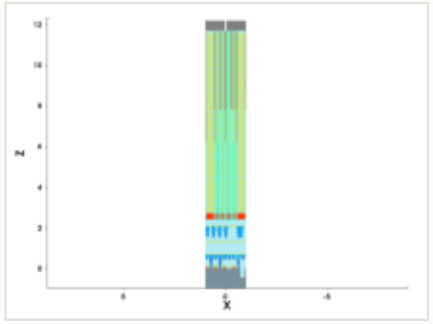


mask: layer 36:0 (OASIS)

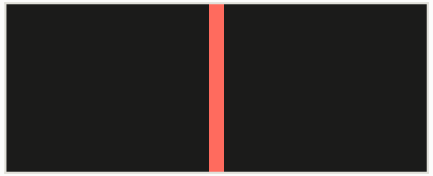


steps by process area

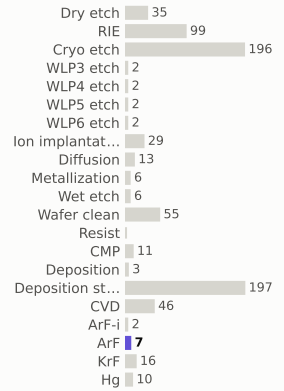

materials deposited (g)

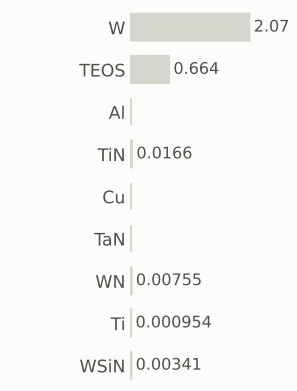

gases emitted (g)

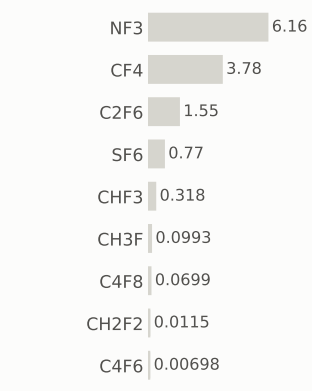

Step #7550: RIE

etch_anisotropic · RIE

1.04	662.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

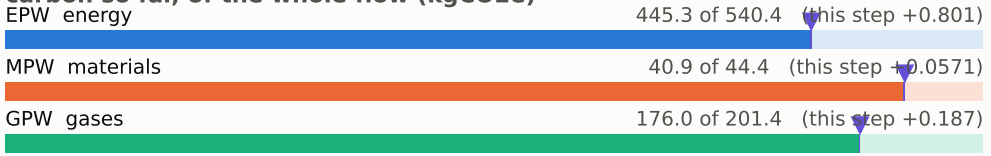


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

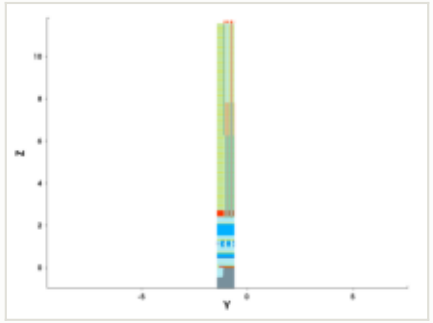


y cut at -1.035 µm

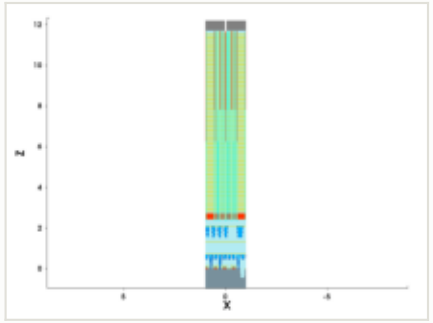


mask for this step

no mask for this step


steps by process area

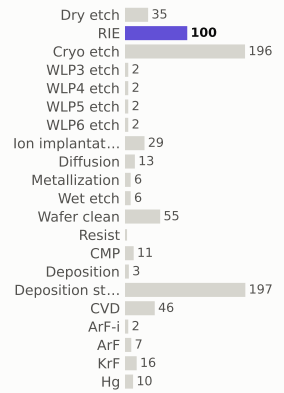

materials deposited (g)

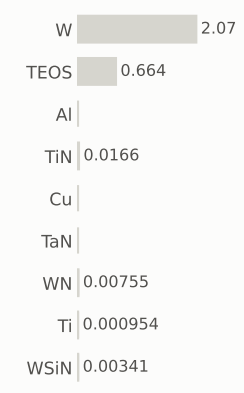

gases emitted (g)



Step #7560: RIE

etch_anisotropic · RIE

1.04	663.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

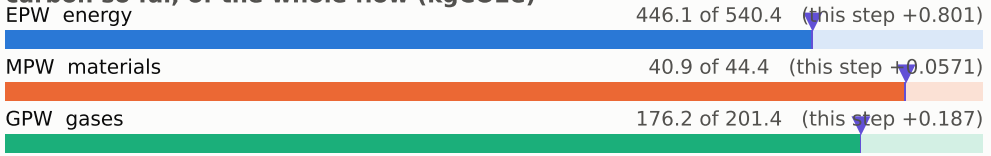


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

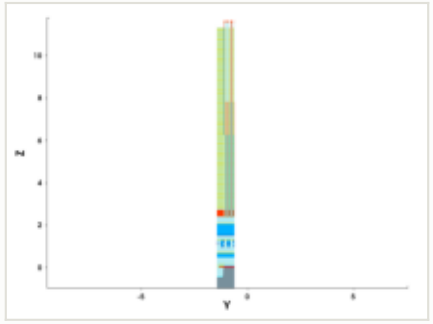


y cut at -1.035 µm

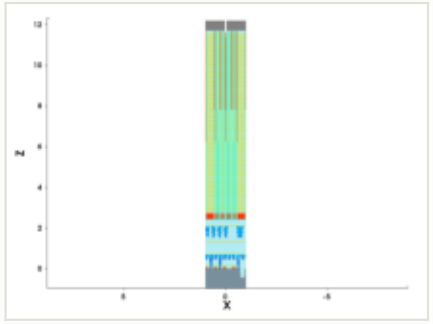


mask for this step

no mask for this step


steps by process area

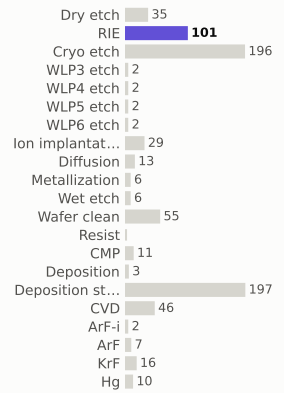

materials deposited (g)

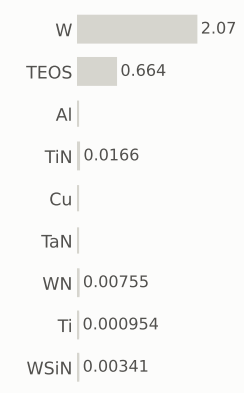

gases emitted (g)



Step #7570: Dry_etch

etch_strip · Dry_etch

0.801	664.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

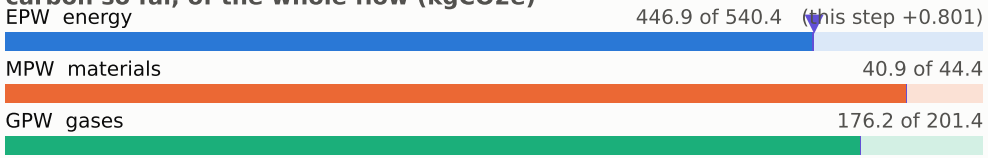


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

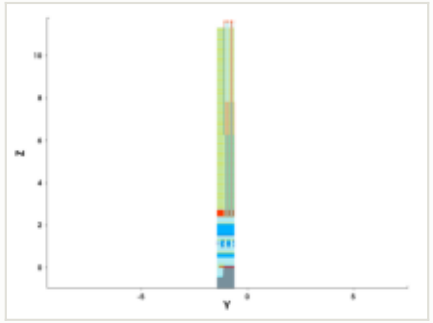


y cut at -1.035 µm

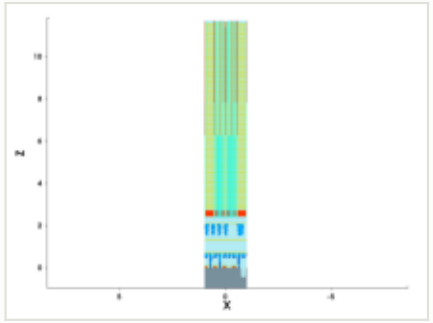


mask for this step

no mask for this step


steps by process area

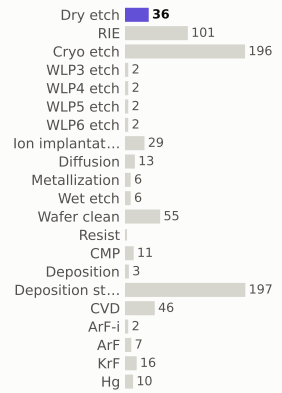

materials deposited (g)

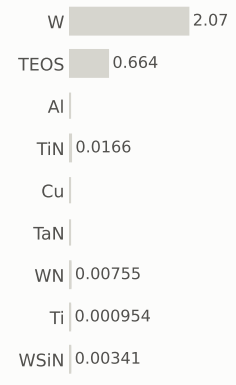

gases emitted (g)



Step #7580: Wafer_clean

clean · Wafer_clean

0.169	664.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

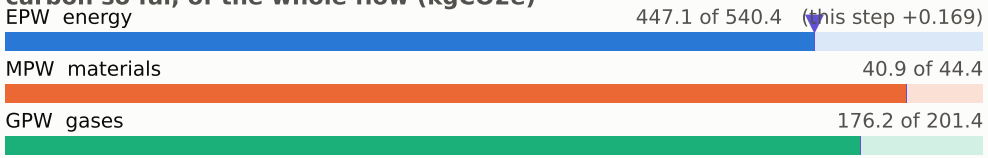


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

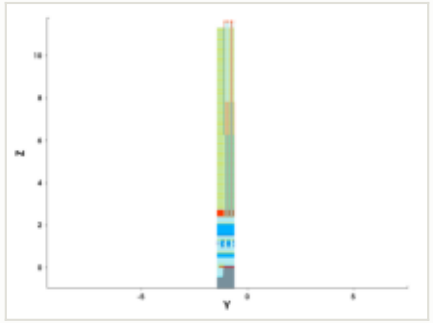


y cut at -1.035 µm

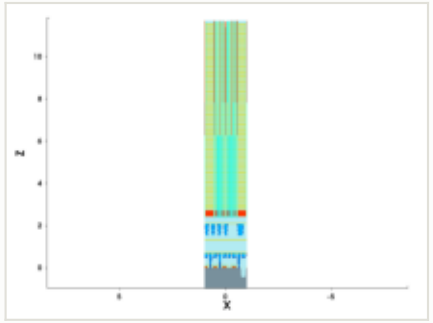


mask for this step

no mask for this step


steps by process area

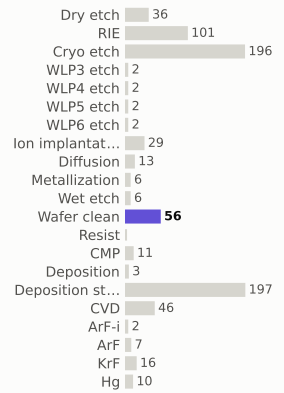

materials deposited (g)

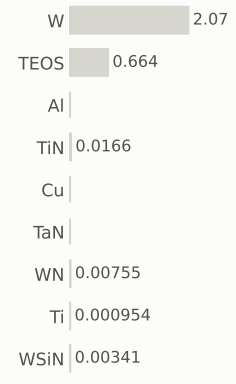

gases emitted (g)



Step #7590: CVD

depo_isotropic · CVD

1.31	665.6	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.7 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

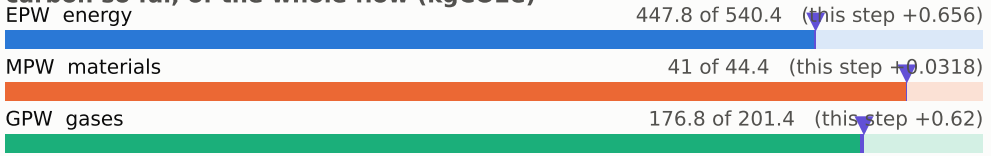


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

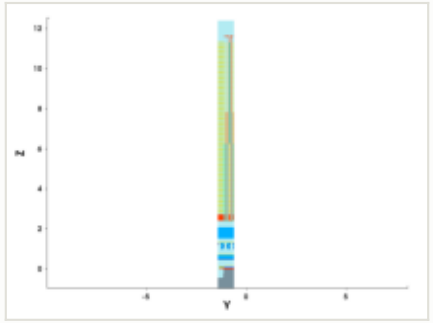


y cut at -1.035 µm

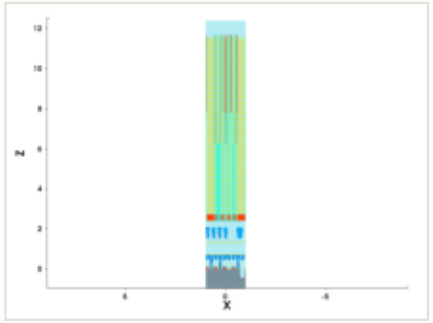


mask for this step

no mask for this step


steps by process area

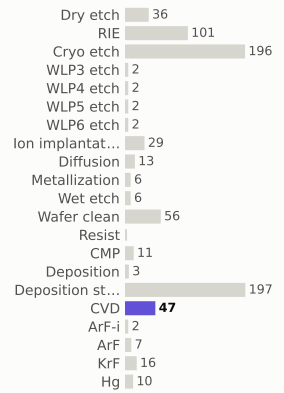

materials deposited (g)

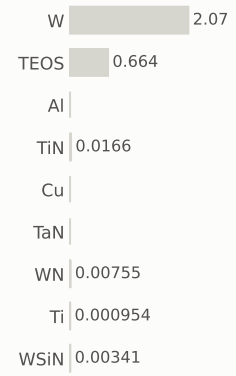

gases emitted (g)

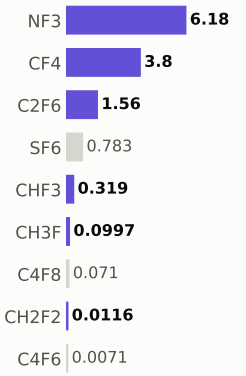

Step #7600: CMP

etch_cmp · CMP

0.169	665.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

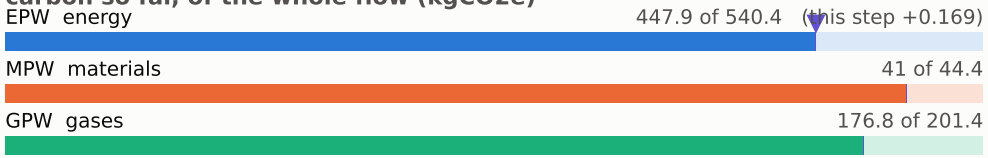


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

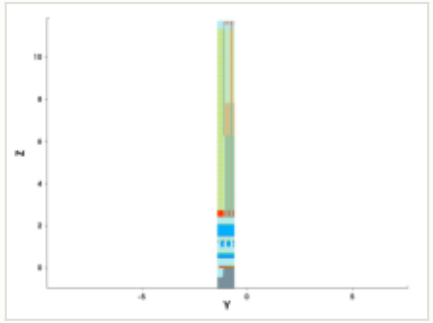


y cut at -1.035 µm

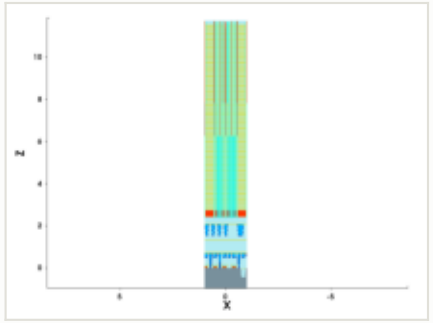


mask for this step

no mask for this step


steps by process area

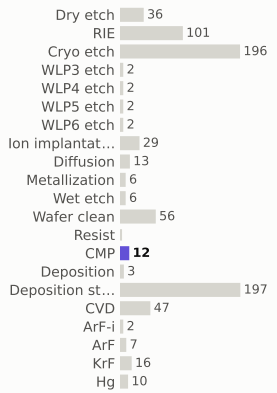

materials deposited (g)

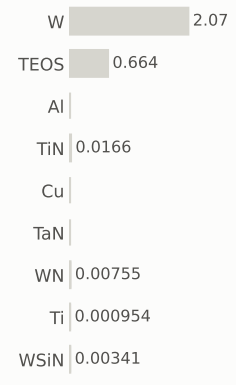

gases emitted (g)



Step #7610: Wafer_clean

clean · Wafer_clean

0.169	665.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

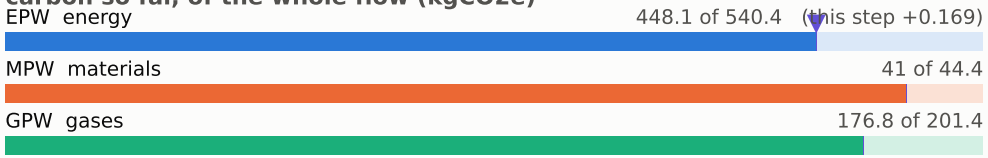


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

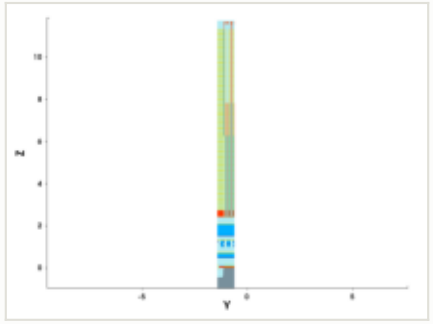


y cut at -1.035 µm

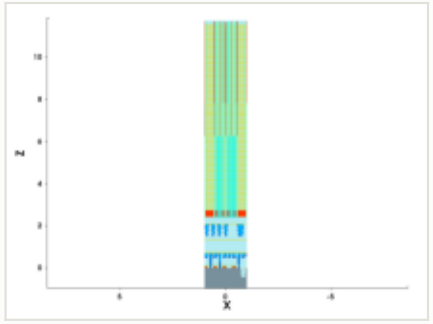


mask for this step

no mask for this step


steps by process area

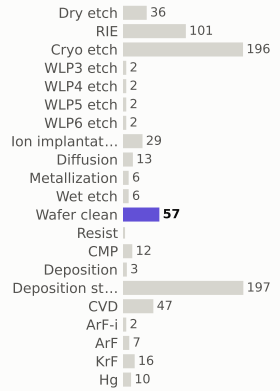

materials deposited (g)

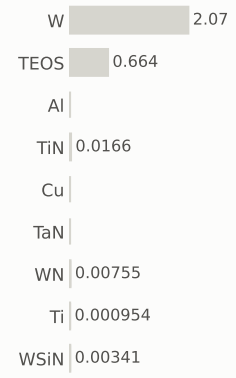

gases emitted (g)



Step #7630: CVD

depo_isotropic · CVD

1.31	667.2	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

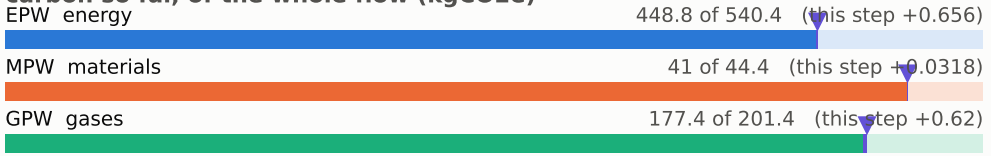


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

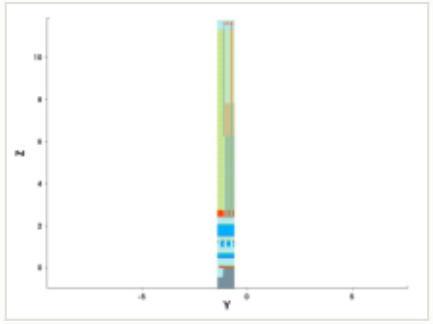


y cut at -1.035 µm

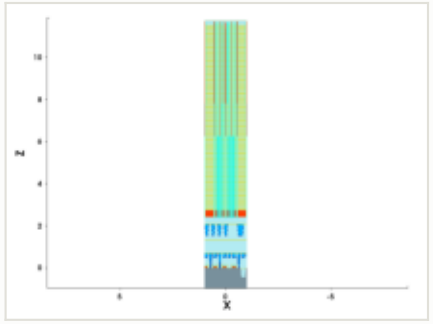


mask for this step

no mask for this step


steps by process area

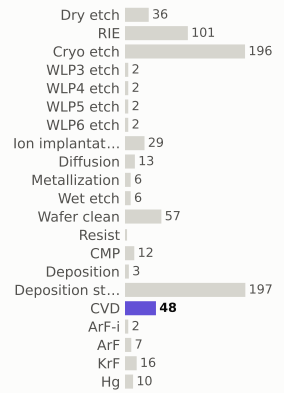

materials deposited (g)

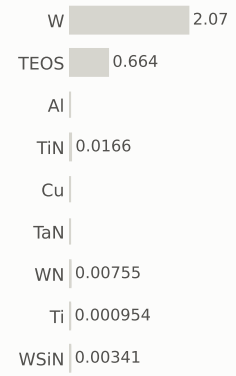

gases emitted (g)

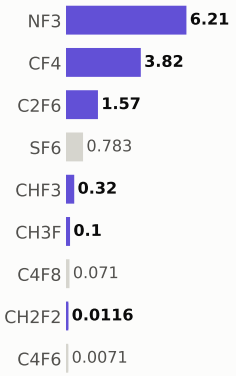

Step #7640: KrF


litho_patterning · KrF

0.199	667.4	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




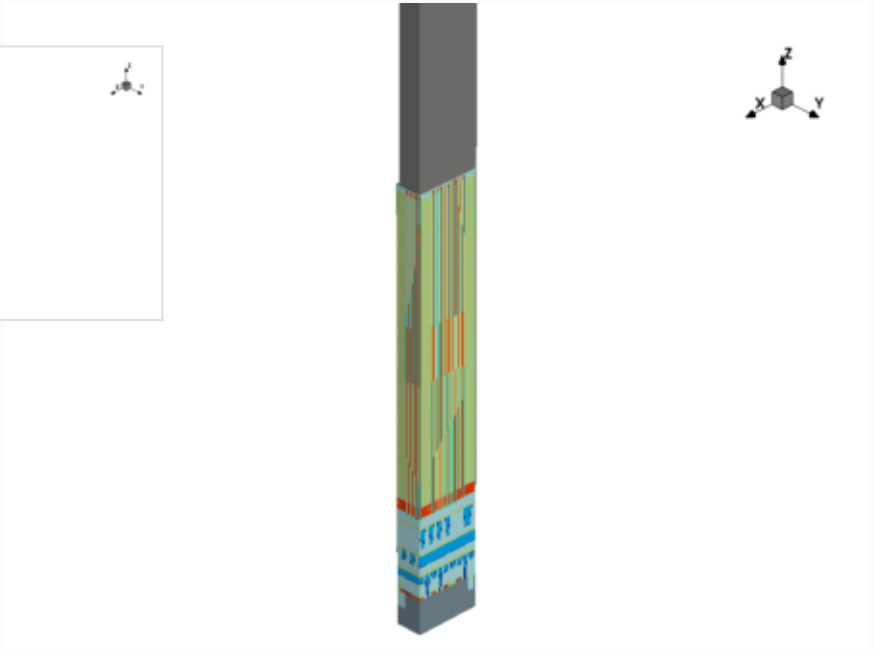

this step

process area	KrF	EPW	0.199 kgCO2e
material	—	EPW tool	0.142 kgCO2e
thickness	—	EPW overhead	0.0568 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.33 kWh + 0.132 overhead	embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

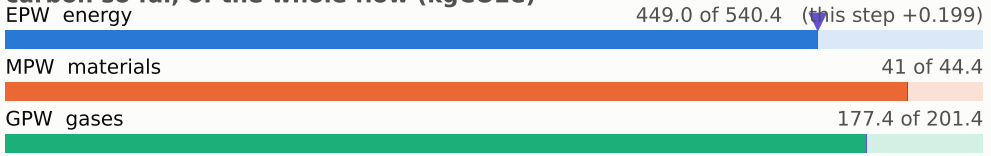


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

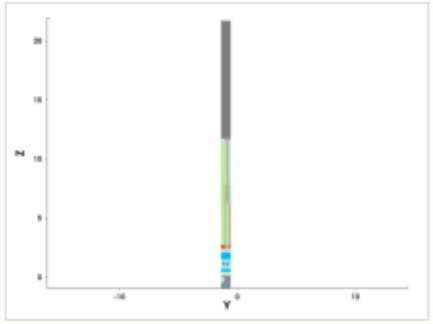


y cut at -1.035 µm

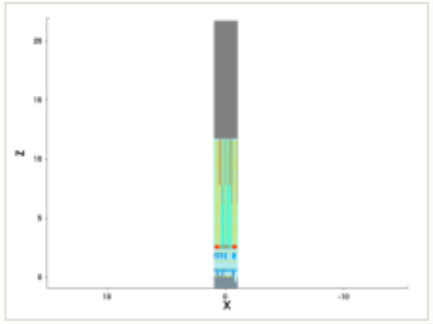


mask: layer 37:0 (OASIS)




steps by process area

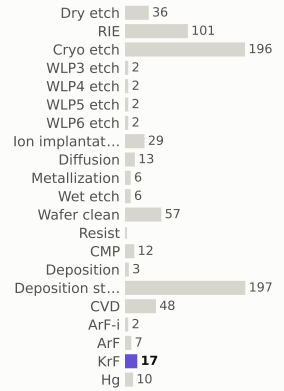

materials deposited (g)

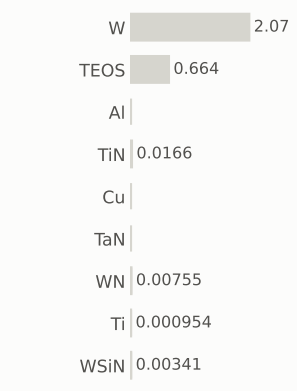

gases emitted (g)

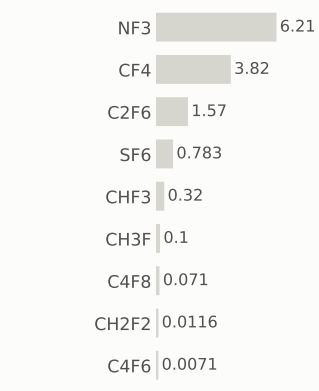

Step #7650: RIE


etch_anisotropic · RIE

1.04	668.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



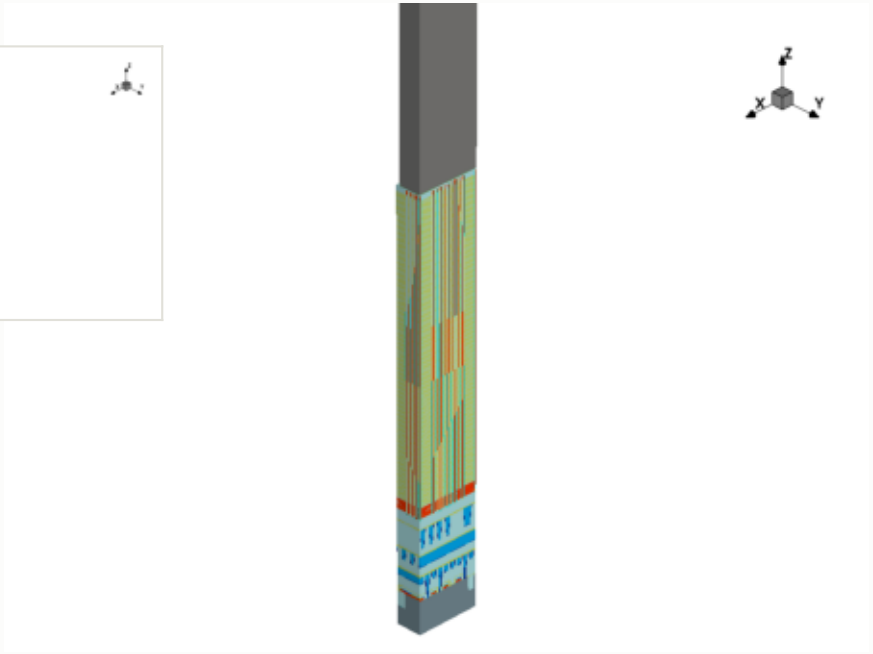


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

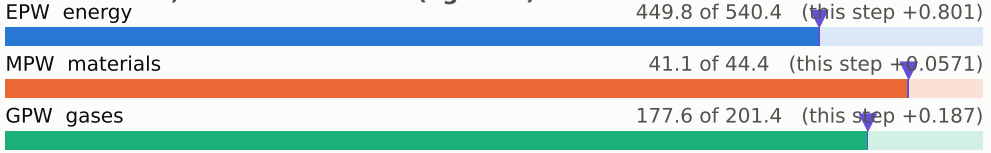


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

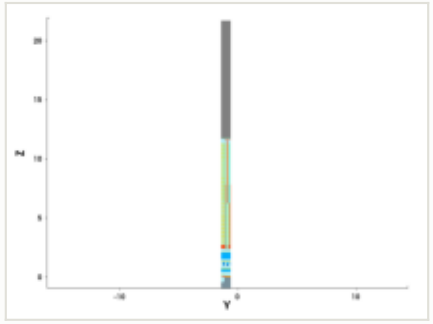


y cut at -1.035 µm

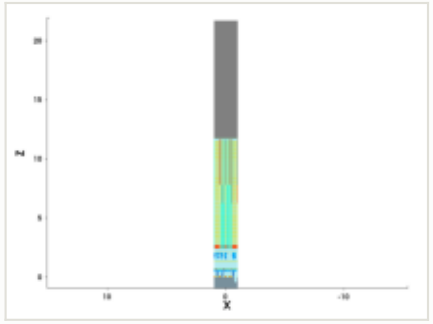


mask for this step

no mask for this step


steps by process area

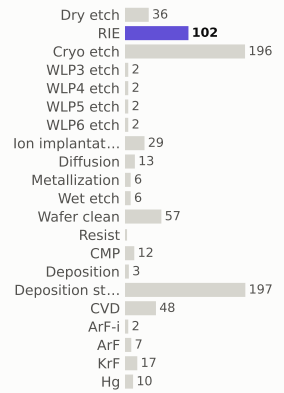

materials deposited (g)

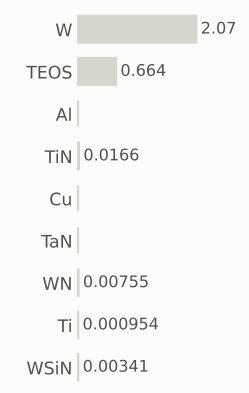

gases emitted (g)

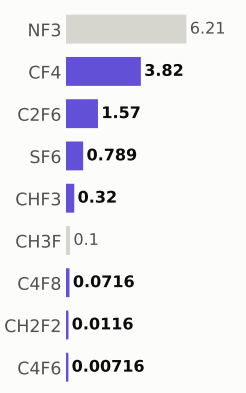

Step #7660: RIE

etch_anisotropic · RIE

1.04	669.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

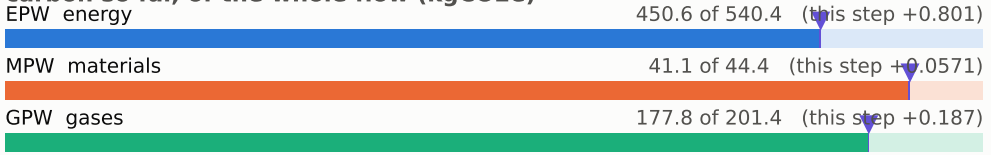


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

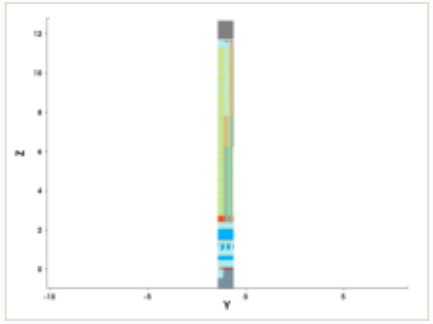


y cut at -1.035 µm

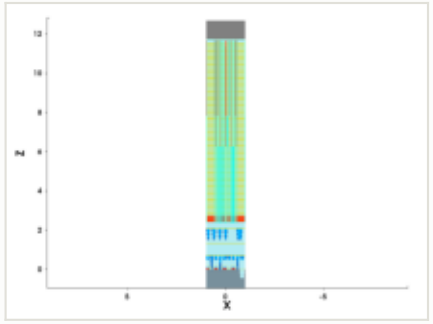


mask for this step

no mask for this step


steps by process area

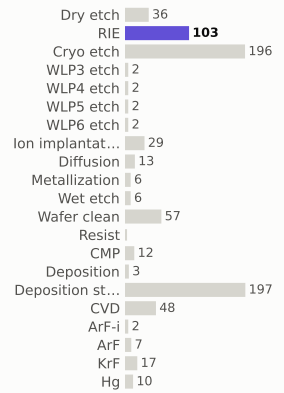

materials deposited (g)

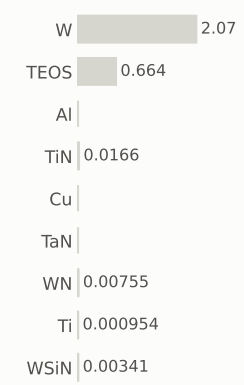

gases emitted (g)

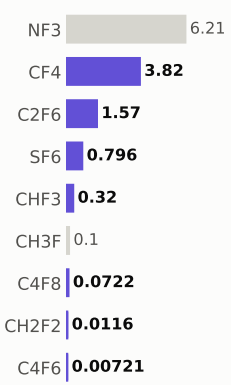

Step #7670: RIE

etch_anisotropic · RIE

1.04	670.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

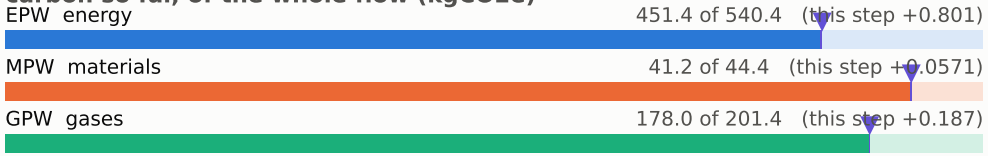


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

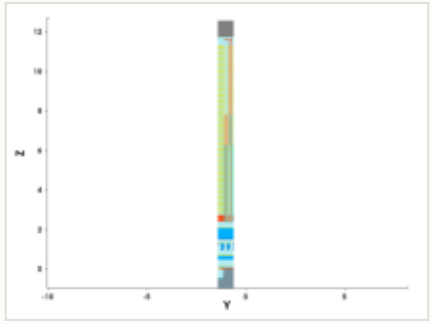


y cut at -1.035 µm

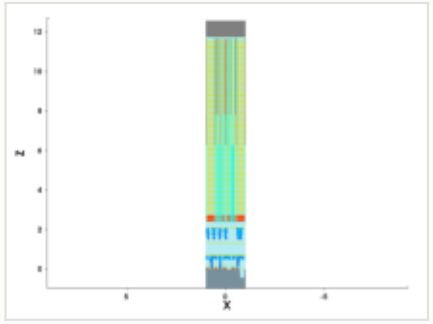


mask for this step

no mask for this step


steps by process area

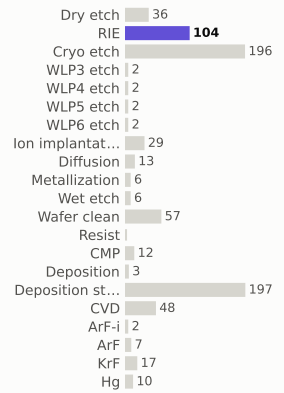

materials deposited (g)

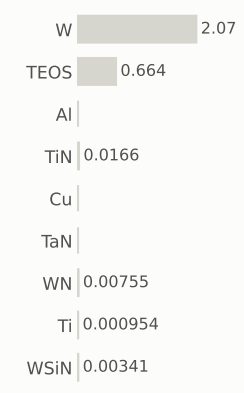

gases emitted (g)

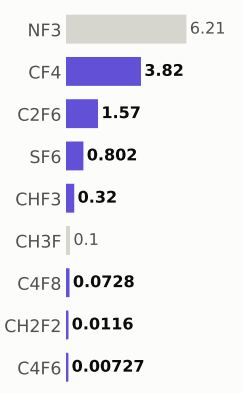

Step #7680: Dry_etch

etch_strip · Dry_etch

0.801	671.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

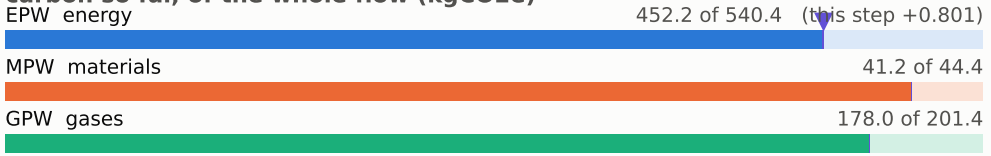


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

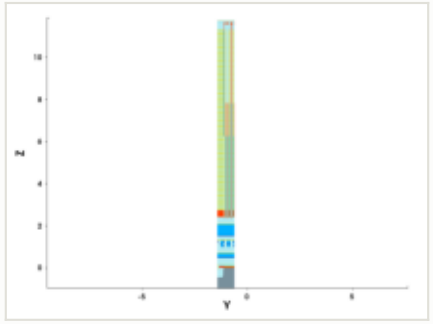


y cut at -1.035 µm

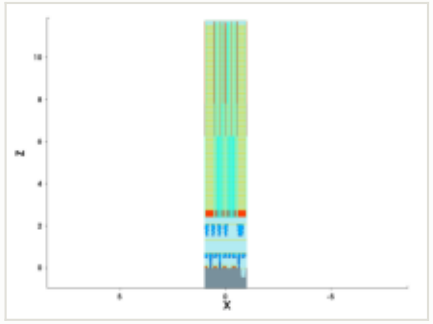


mask for this step

no mask for this step


steps by process area

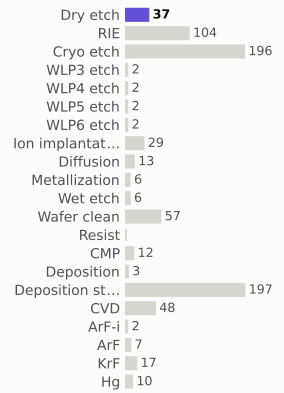

materials deposited (g)

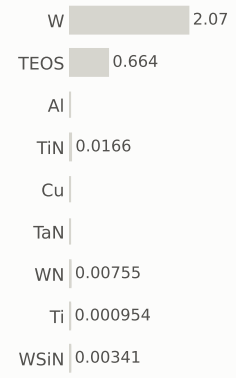

gases emitted (g)



Step #7690: Wafer_clean


clean · Wafer_clean

0.169	671.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

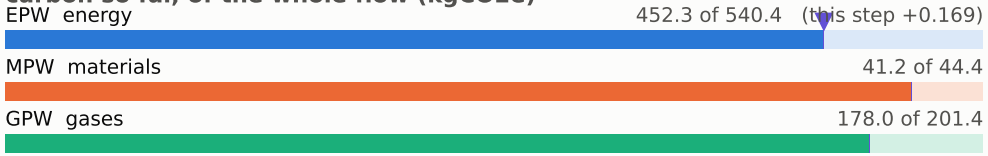


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

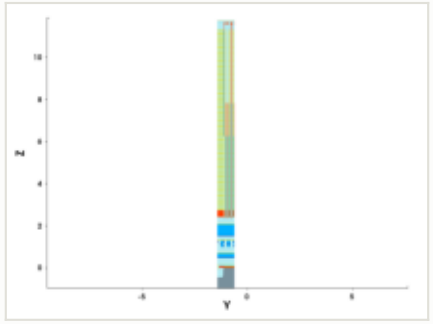


y cut at -1.035 µm

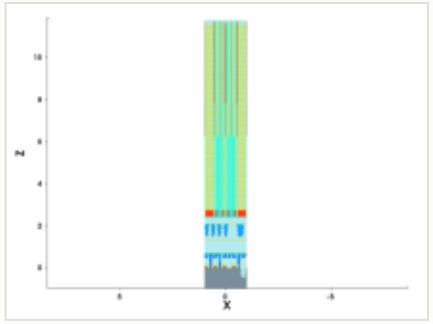


mask for this step

no mask for this step


steps by process area

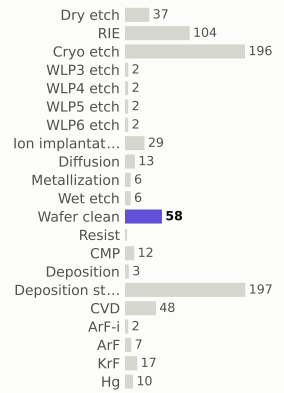

materials deposited (g)

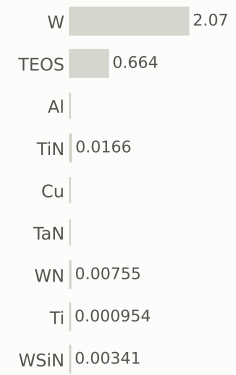

gases emitted (g)

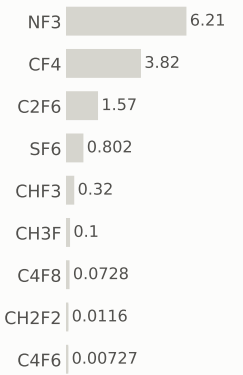

Step #7700: Deposition

depo_isotropic · Deposition

0.656	672.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit







this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.03 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

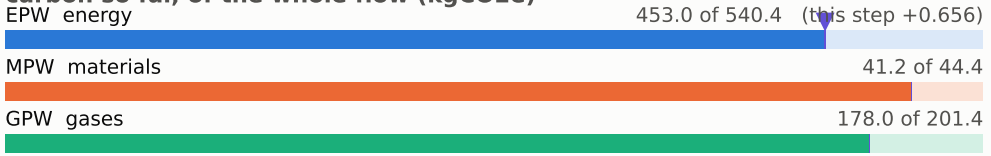


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

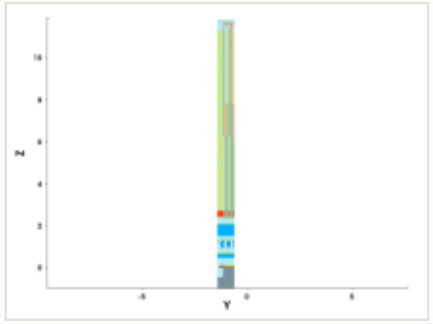


y cut at -1.035 µm

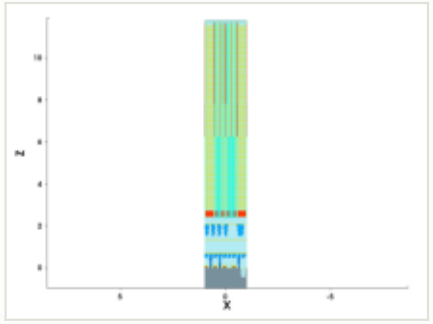


mask for this step

no mask for this step


steps by process area

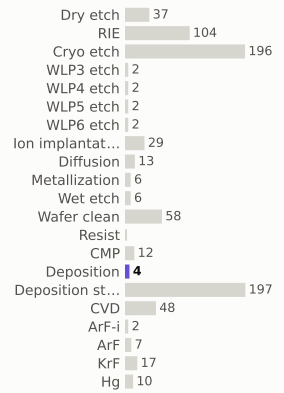

materials deposited (g)

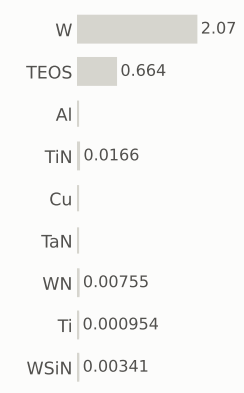

gases emitted (g)



Step #7710: RIE


etch_anisotropic · RIE

1.04	673.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

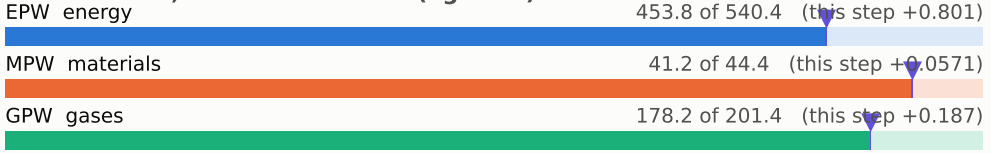


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

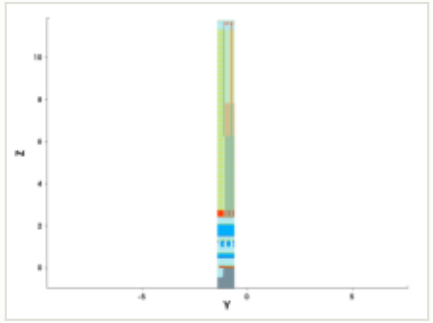


y cut at -1.035 µm

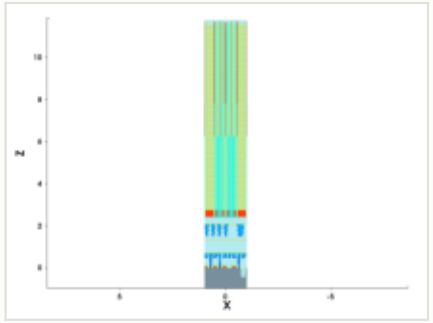


mask for this step

no mask for this step


steps by process area

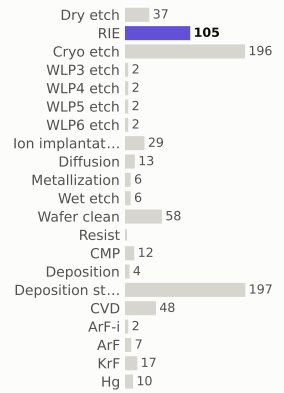

materials deposited (g)

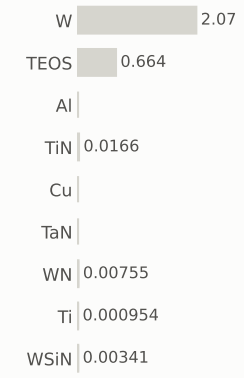

gases emitted (g)

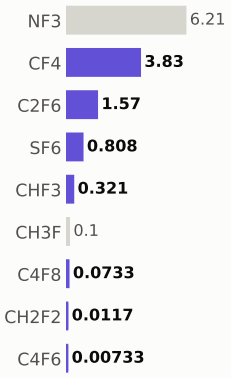

Step #7720: Wet_etch

etch_isotropic · Wet_etch

0.169	673.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

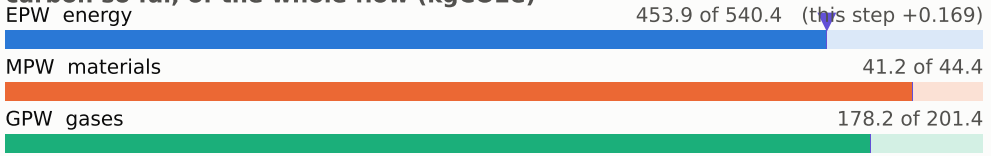


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

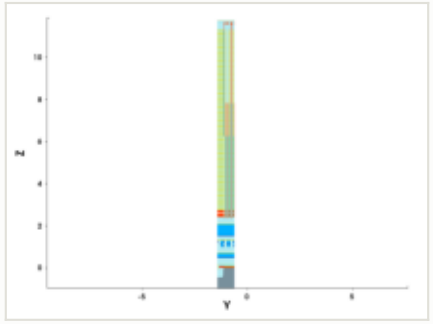


y cut at -1.035 µm

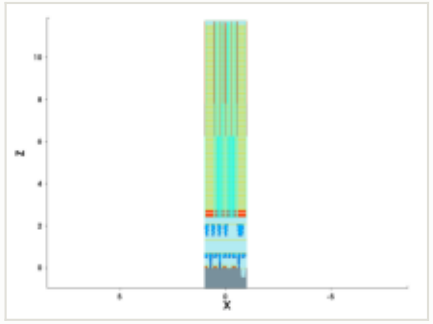


mask for this step

no mask for this step


steps by process area

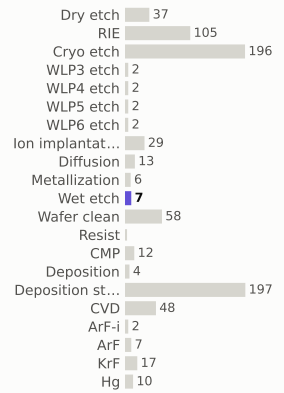

materials deposited (g)

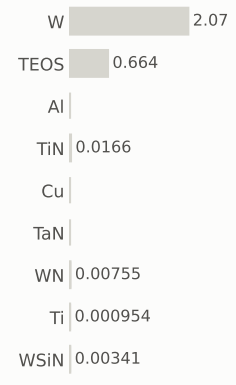

gases emitted (g)



Step #7730: Wet_etch

etch_isotropic · Wet_etch

0.169	673.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

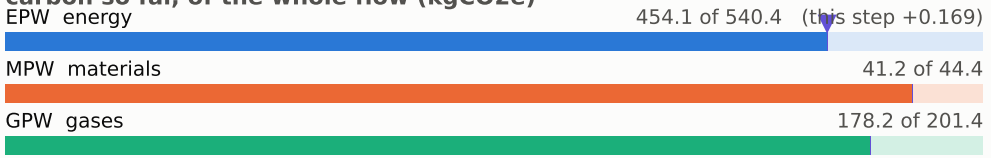


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

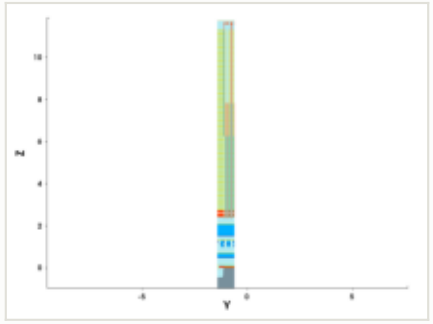


y cut at -1.035 µm

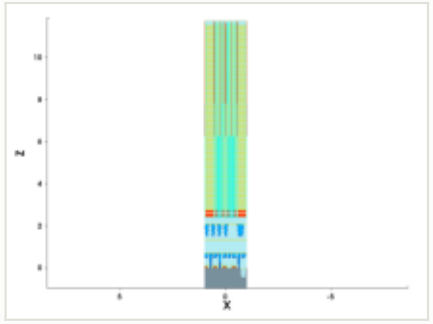


mask for this step

no mask for this step


steps by process area

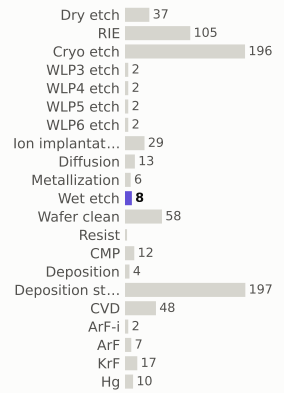

materials deposited (g)

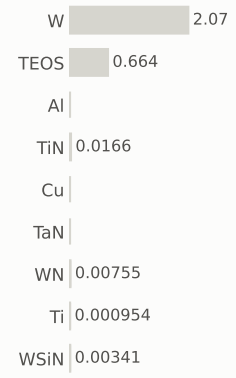

gases emitted (g)



Step #7740: CVD

depo_isotropic · CVD

1.31	674.9	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

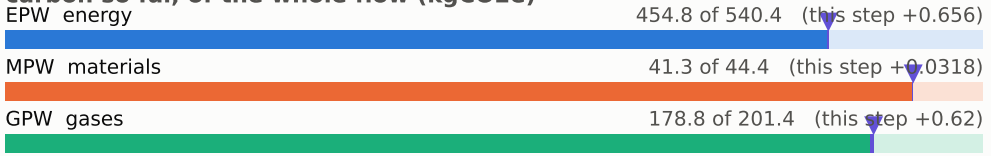


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

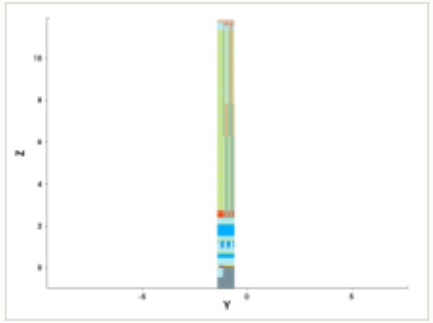


y cut at -1.035 µm

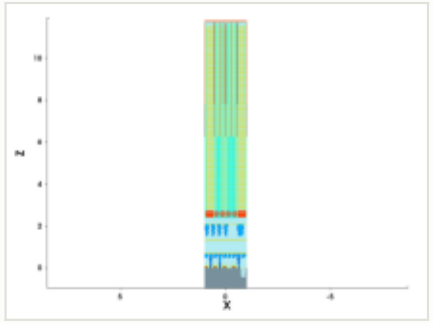


mask for this step

no mask for this step


steps by process area

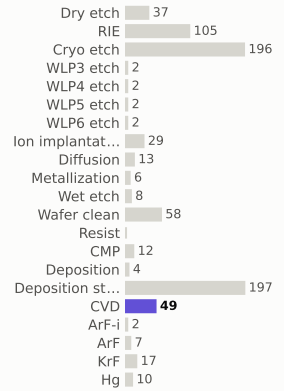

materials deposited (g)

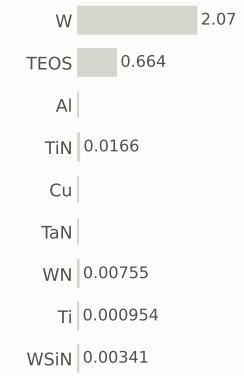

gases emitted (g)

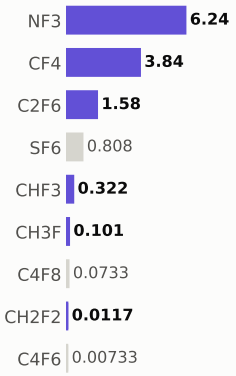

Step #7750: RIE


etch_isotropic · RIE

1.04	675.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

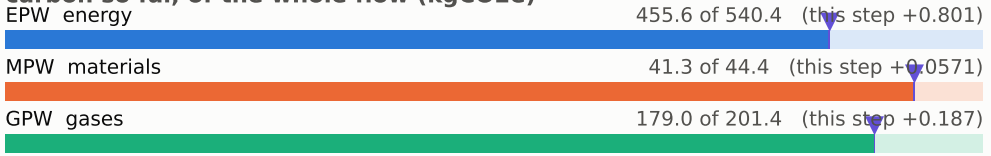


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

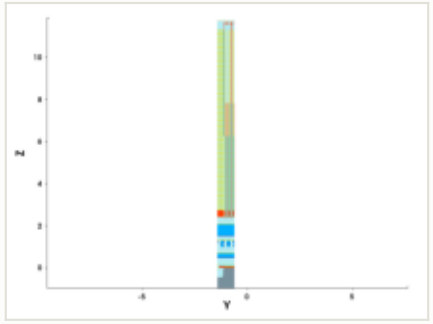


y cut at -1.035 µm

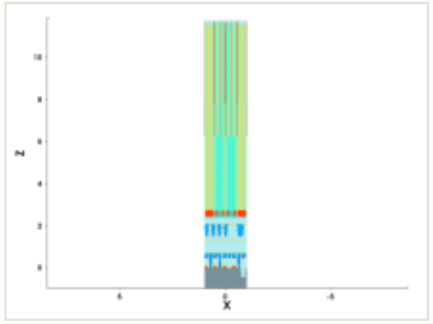


mask for this step

no mask for this step


steps by process area

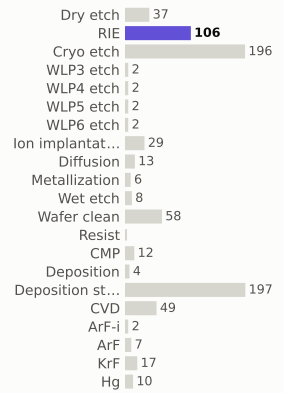

materials deposited (g)

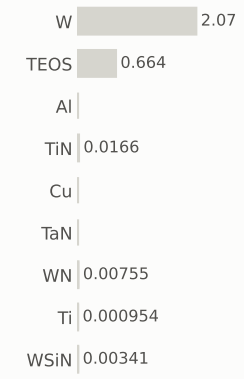

gases emitted (g)

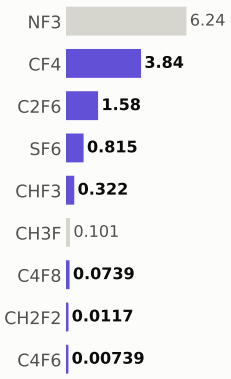

Step #7760: CVD


depo_isotropic · CVD

1.31	677.2	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.15 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

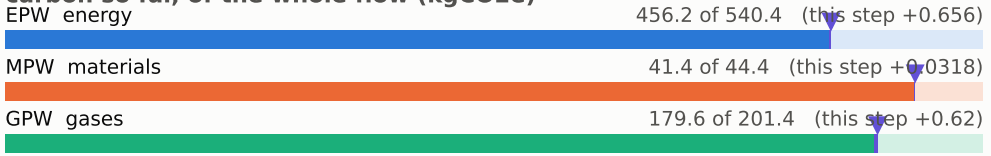


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

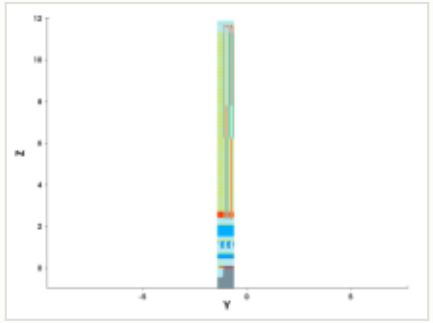


y cut at -1.035 µm

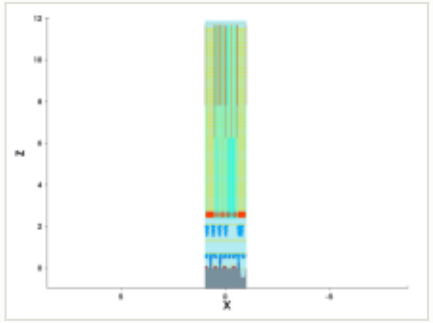


mask for this step

no mask for this step


steps by process area

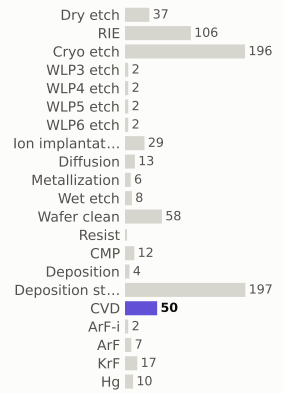

materials deposited (g)



gases emitted (g)



Step #7770: CMP

etch_cmp · CMP

0.169	677.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

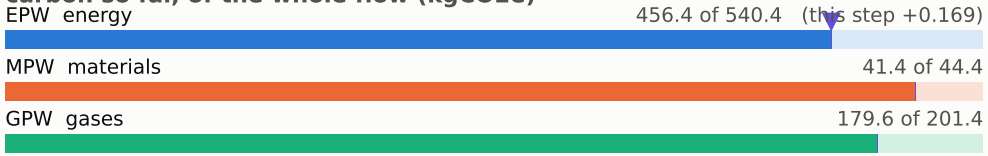


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

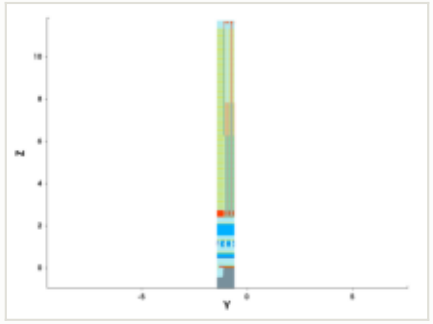


y cut at -1.035 µm

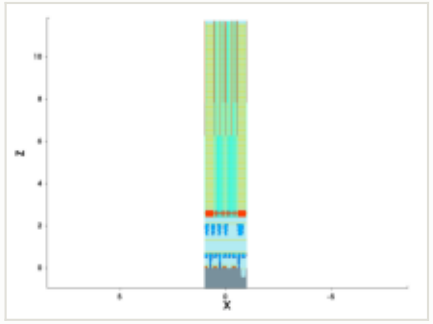


mask for this step

no mask for this step


steps by process area

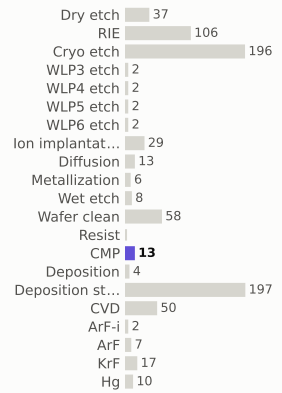

materials deposited (g)

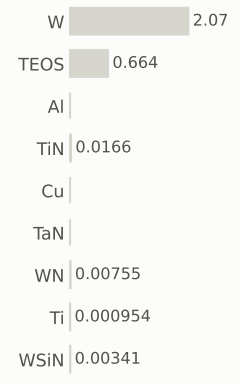

gases emitted (g)



Step #7780: Wafer_clean

clean · Wafer_clean

0.169	677.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

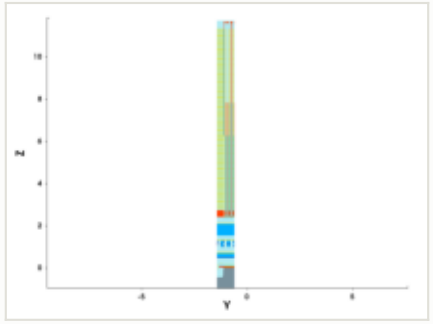

y cut at -1.035 µm

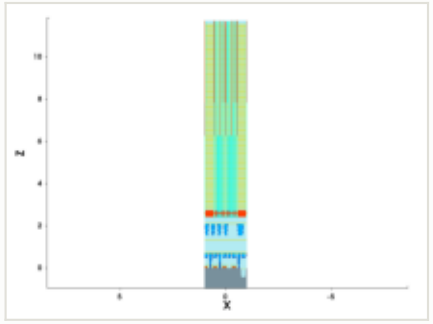

mask for this step

no mask for this step


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead


EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

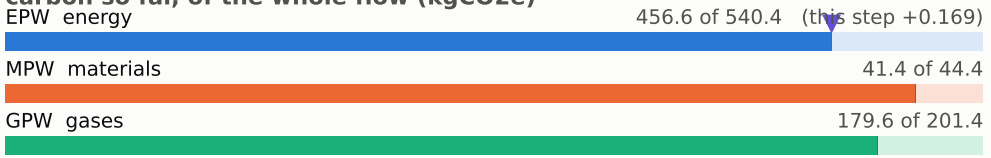


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

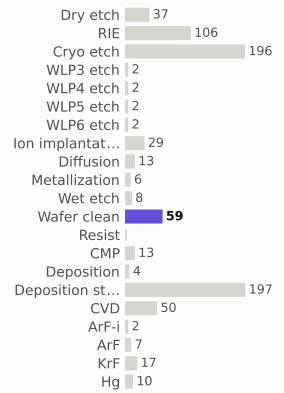

materials deposited (g)

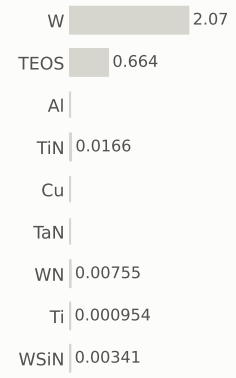

gases emitted (g)



Step #7800: ArF


litho_patterning · ArF

0.199	677.7	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



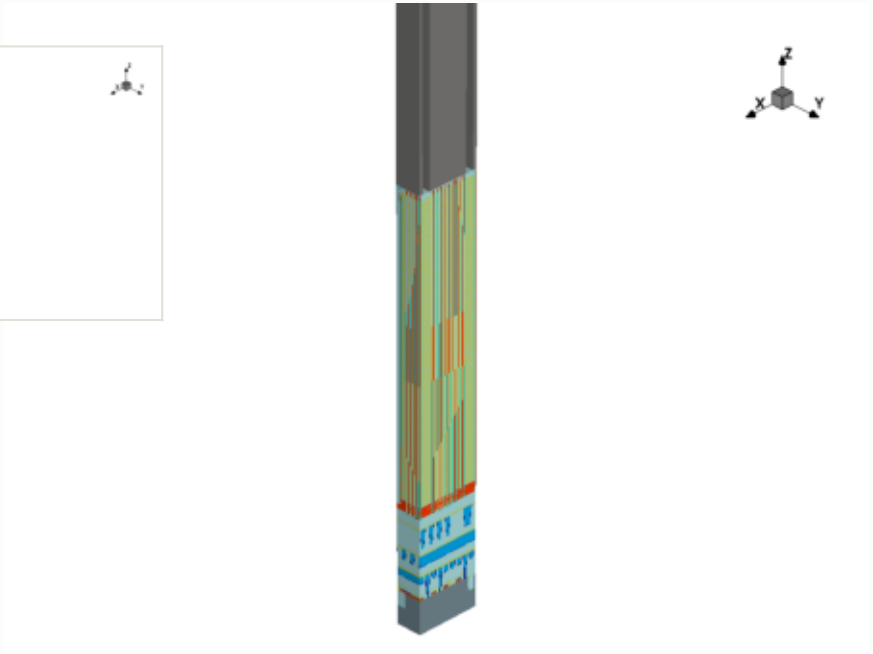


this step

process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

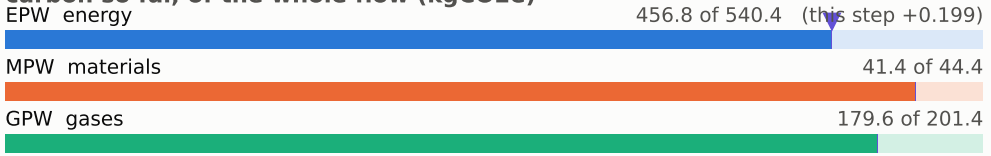


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

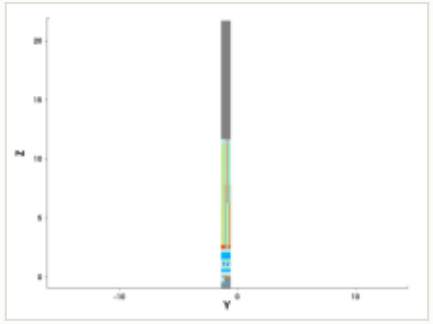


y cut at -1.035 µm

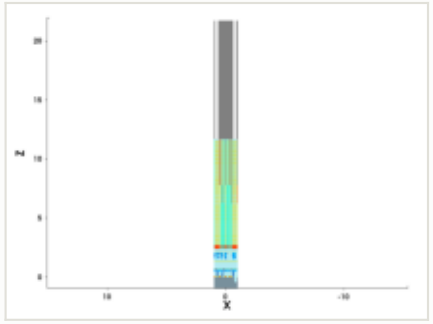


mask: layer 38:0 (OASIS)




steps by process area

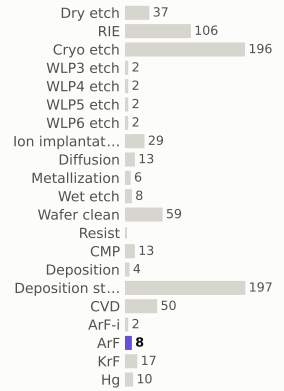

materials deposited (g)

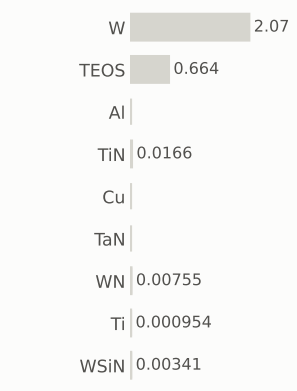

gases emitted (g)

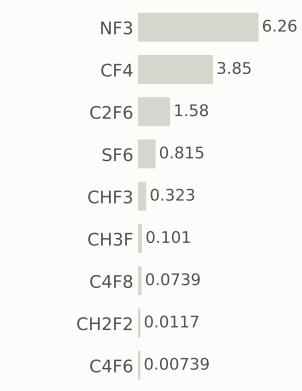

Step #7810: Cryo_etch

etch_anisotropic · Cryo_etch

0.517	678.3	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit




this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

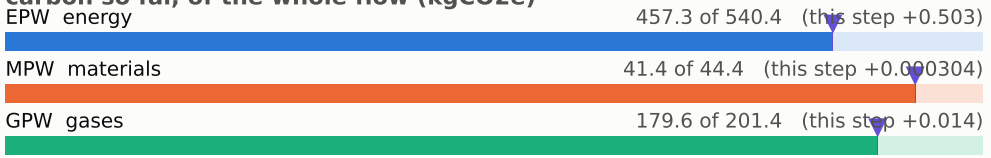


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

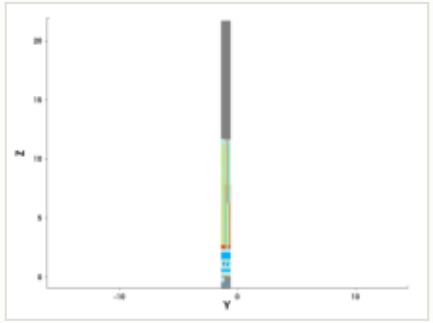


y cut at -1.035 µm

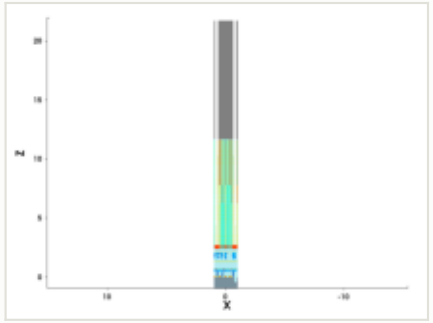


mask for this step

no mask for this step


steps by process area

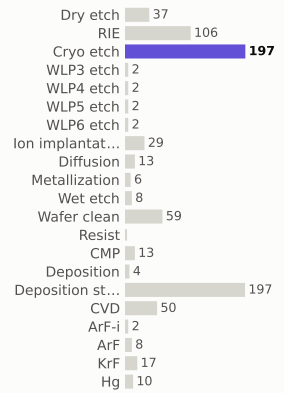

materials deposited (g)

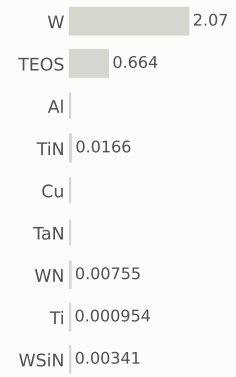

gases emitted (g)

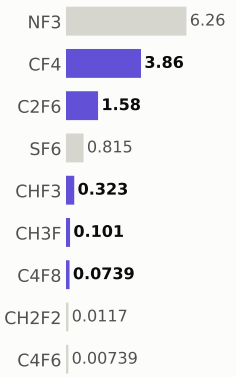

Step #7820: Cryo_etch


etch_multi_offset · Cryo_etch

0.517	678.8	0.066%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Cryo_etch
material	—
thickness	—
material GWP	—
input gases	CF4 0.0241 g
energy	0.835 kWh + 0.334 overhead

EPW	0.503 kgCO2e
EPW tool	0.359 kgCO2e
EPW overhead	0.144 kgCO2e
MPW	0.000304 kgCO2e (gas 0.000304)
GPW	0.014 kgCO2e
embodied carbon	**0.517 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

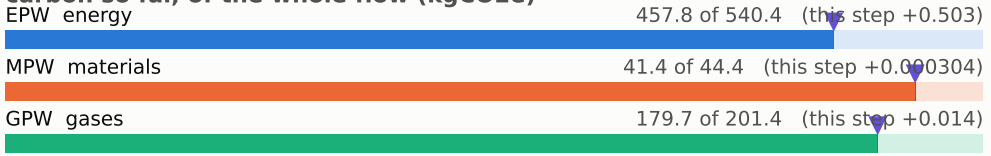


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

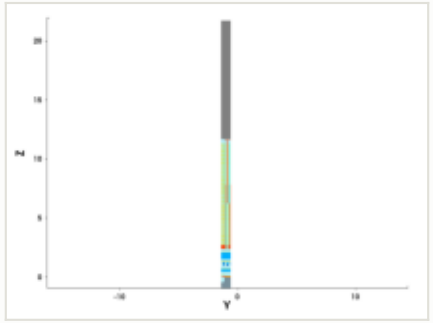


y cut at -1.035 µm

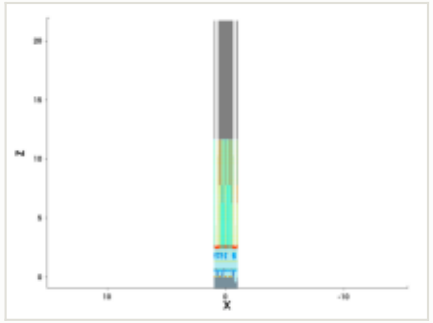


mask for this step

no mask for this step


steps by process area

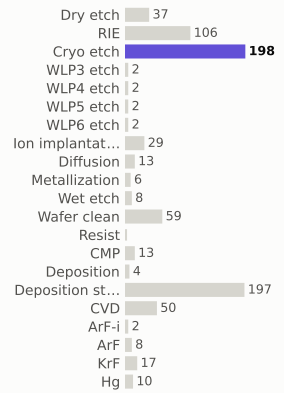

materials deposited (g)

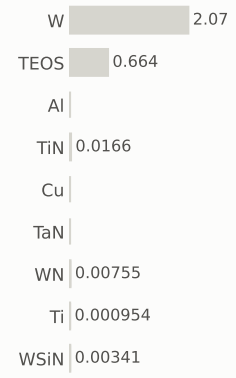

gases emitted (g)



Step #7830: Ion_implantation


implant_ellipsoid · Ion_implantation

0.801	679.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



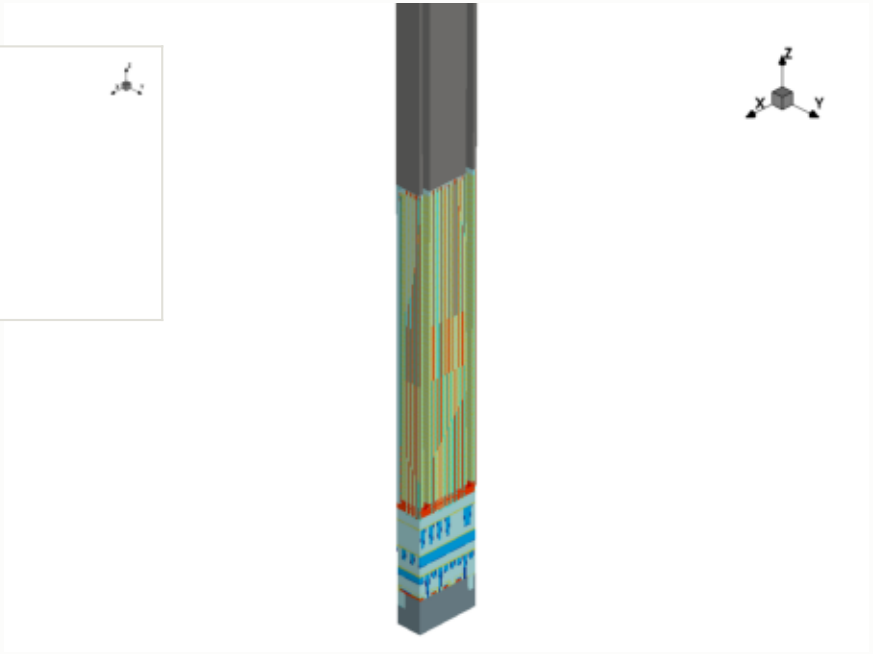


this step

process area	Ion_implantation	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: AffectedMaterialsFilter, Depth, Lateral, MaterialFilter, Primary, RemoveEmptyRegions


carbon so far, of the whole flow (kgCO2e)

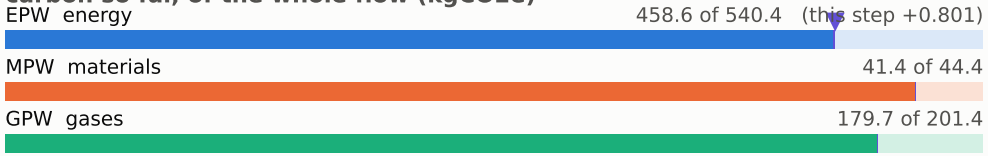


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

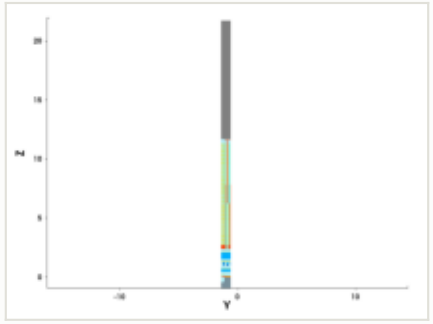


y cut at -1.035 µm

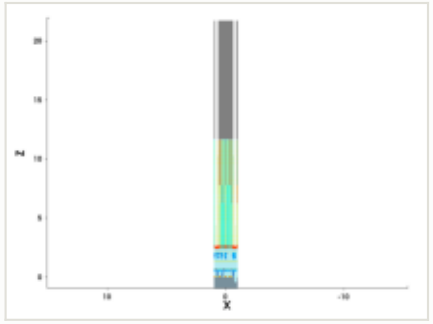


mask for this step

no mask for this step


steps by process area

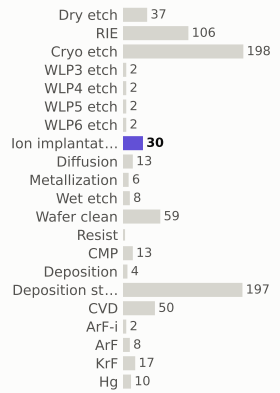

materials deposited (g)

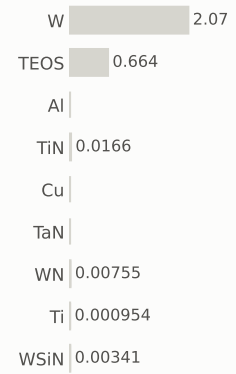

gases emitted (g)



Step #7840: Dry_etch

etch_strip · Dry_etch

0.801	680.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

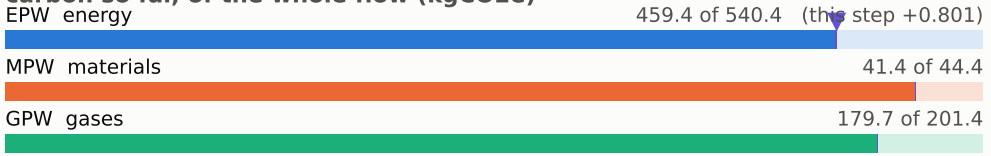


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

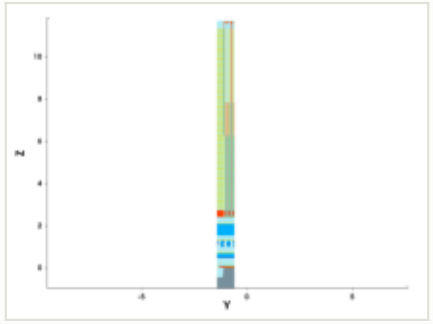


y cut at -1.035 µm

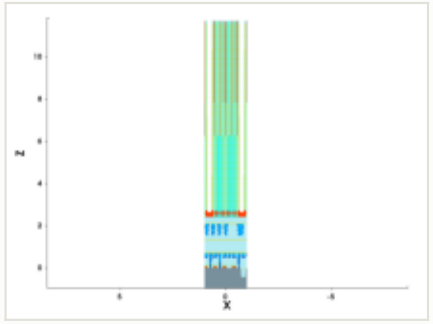


mask for this step

no mask for this step


steps by process area

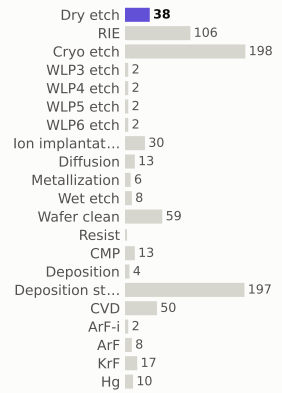

materials deposited (g)

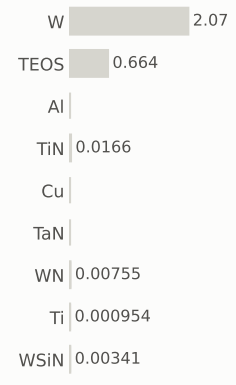

gases emitted (g)



Step #7850: Wafer_clean

clean · Wafer_clean

0.169	680.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

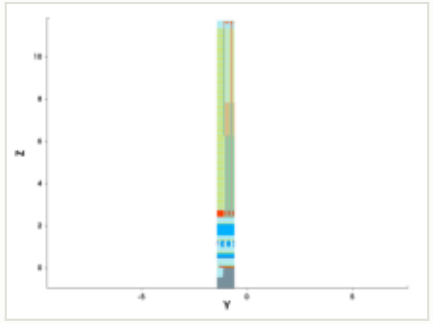

y cut at -1.035 µm

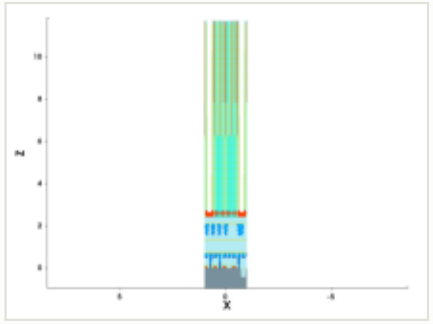

mask for this step


no mask for this step

this step


process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

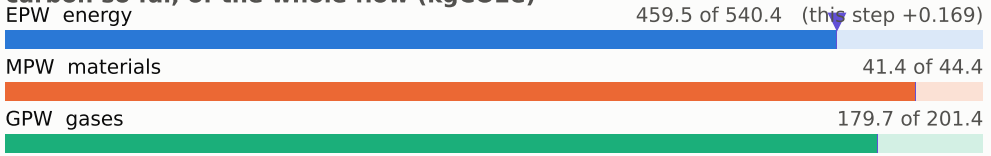


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

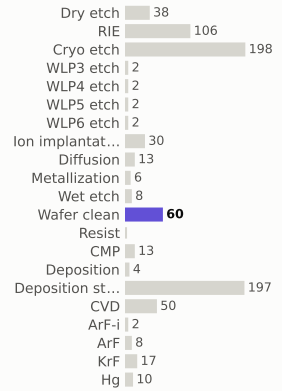

materials deposited (g)

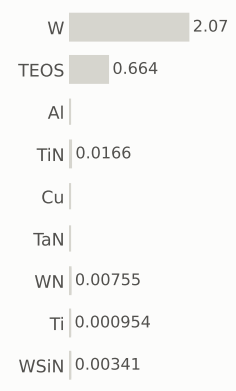

gases emitted (g)



Step #7860: Wet_etch

etch_isotropic · Wet_etch

0.169	680.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Wet_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

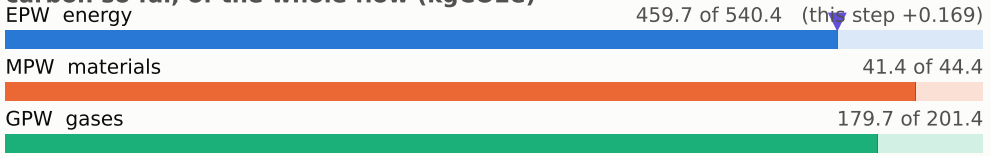


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

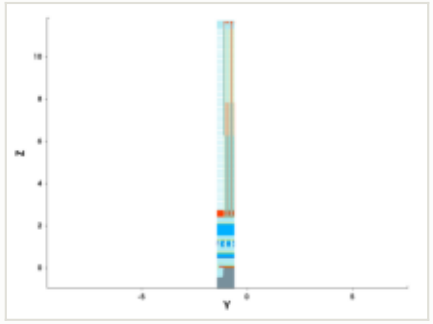


y cut at -1.035 µm

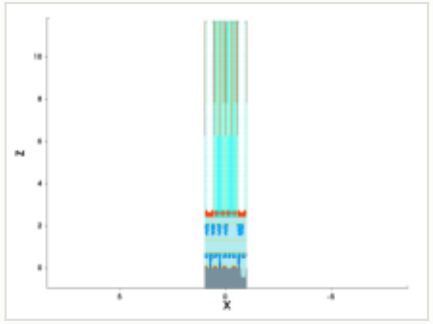


mask for this step

no mask for this step


steps by process area

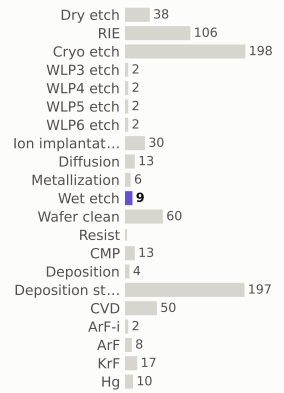

materials deposited (g)

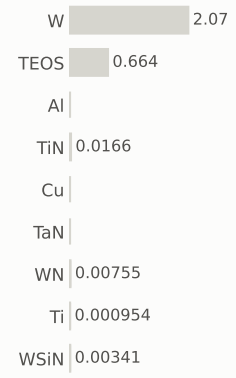

gases emitted (g)



Step #7870: Spx_only

etch_isotropic · Spx_only

0	680.7	0%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Spx_only
material	—
thickness	—
material GWP	—
input gases	—
energy	0 kWh + 0 overhead

EPW	0 kgCO2e
EPW tool	0 kgCO2e
EPW overhead	0 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0 kgCO2e**

Spx_only step: not counted as a process step (uncounted_process_areas)


carbon so far, of the whole flow (kgCO2e)

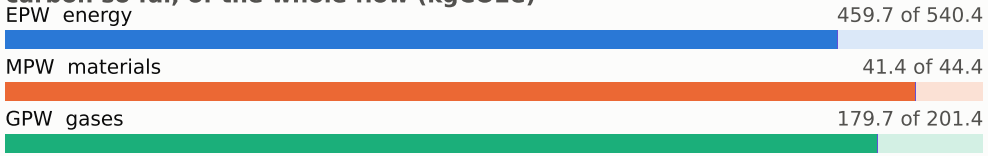


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

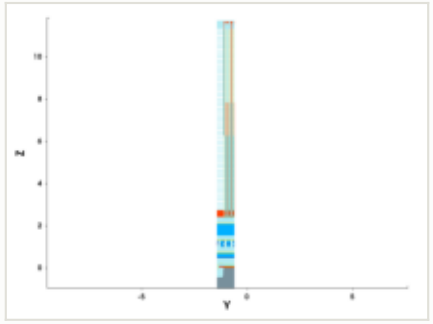


y cut at -1.035 µm

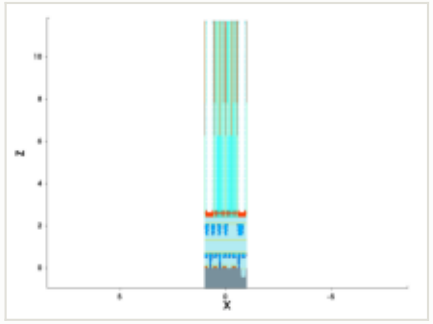


mask for this step

no mask for this step


steps by process area

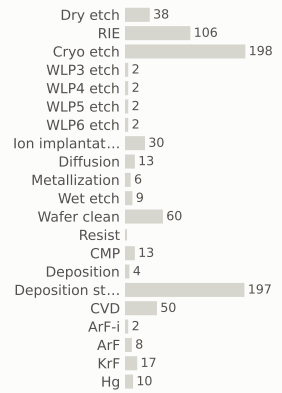

materials deposited (g)

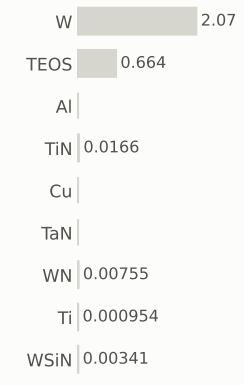

gases emitted (g)



Step #7880: Diffusion

depo_isotropic · Diffusion

0.801	681.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

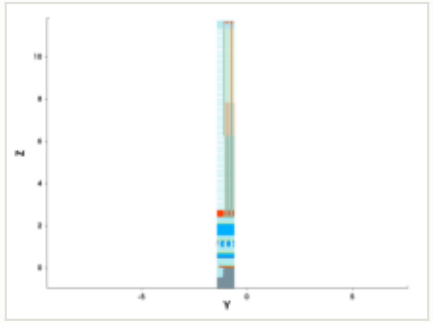

y cut at -1.035 µm

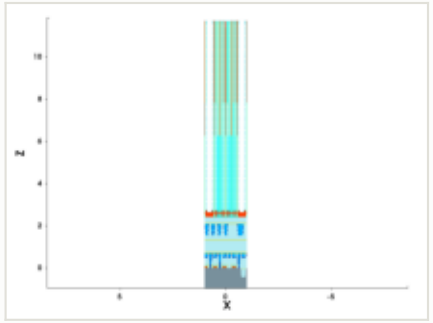

mask for this step


no mask for this step

this step

process area	Diffusion
material	—
thickness	0.03 µm
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

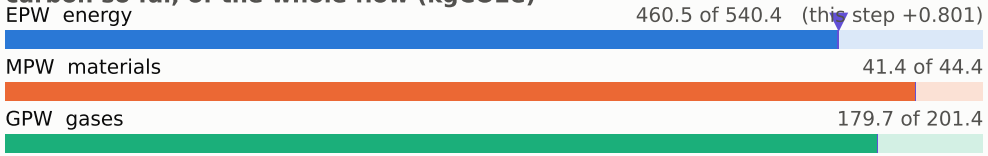


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

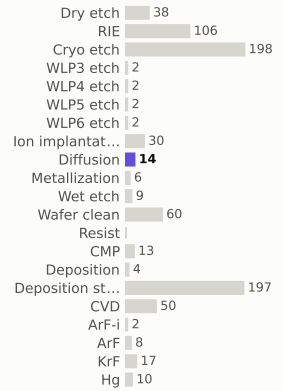

materials deposited (g)

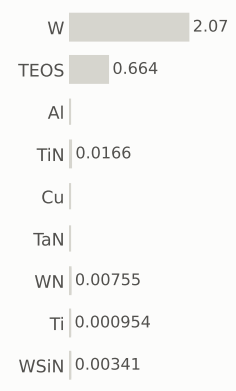

gases emitted (g)



Step #7890: Deposition

depo_isotropic · Deposition

0.656	682.2	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Deposition	EPW	0.656 kgCO2e
material	—	EPW tool	0.469 kgCO2e
thickness	0.002 µm	EPW overhead	0.187 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.09 kWh + 0.436 overhead	embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

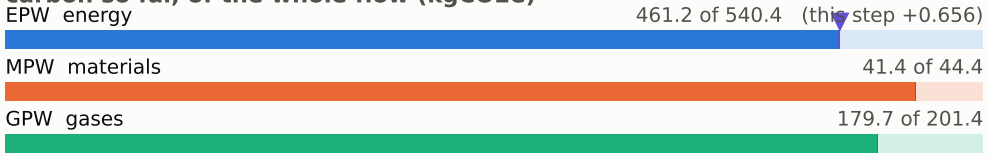


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

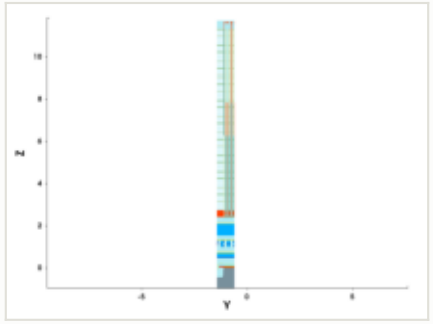


y cut at -1.035 µm

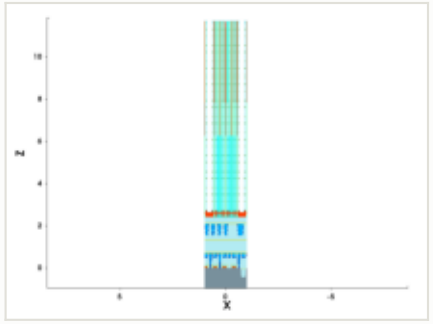


mask for this step

no mask for this step


steps by process area

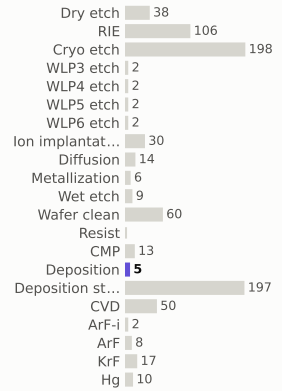

materials deposited (g)

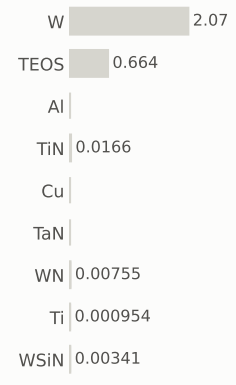

gases emitted (g)



Step #7900: Diffusion

anneal · Diffusion

0.801	683.0	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Diffusion	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp


carbon so far, of the whole flow (kgCO2e)

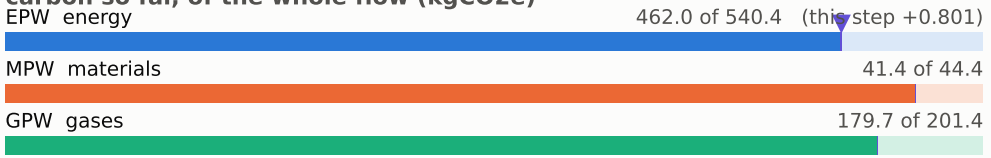


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

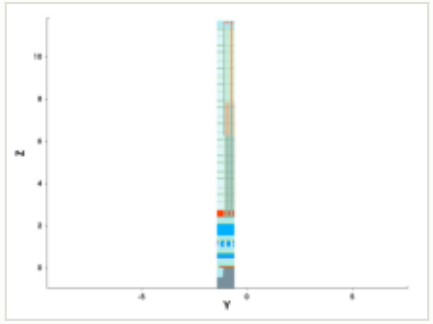


y cut at -1.035 µm

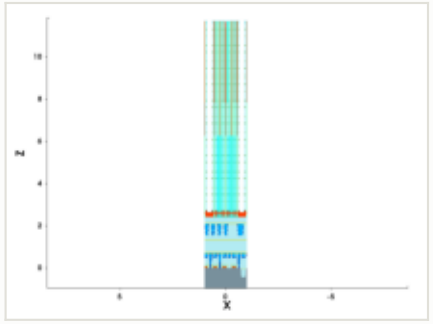


mask for this step

no mask for this step


steps by process area

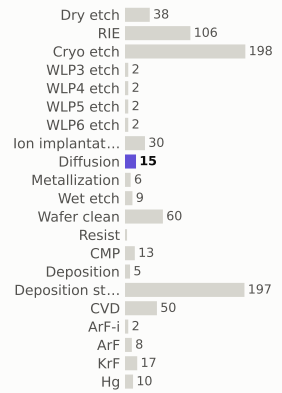

materials deposited (g)

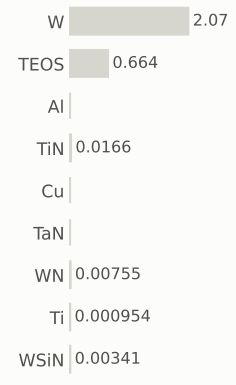

gases emitted (g)



Step #7910: Deposition

depo_isotropic · Deposition

0.656	683.6	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Deposition
material	TiN
thickness	0.002 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	3.24e-05 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

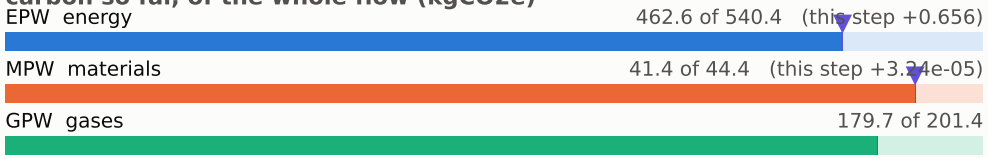


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

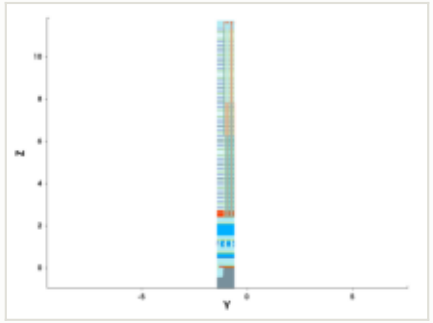


y cut at -1.035 µm

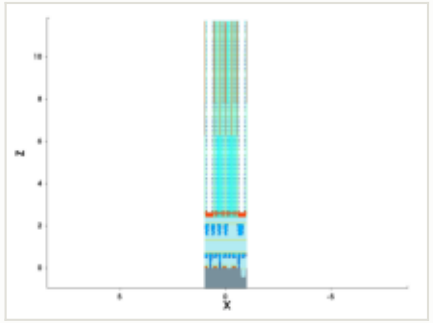


mask for this step

no mask for this step


steps by process area

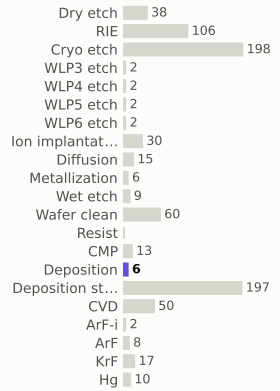

materials deposited (g)

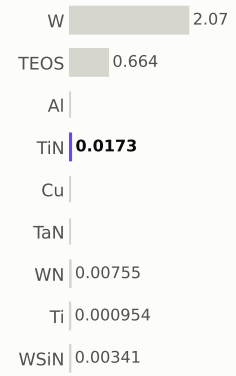

gases emitted (g)



Step #7920: Metallization

depo_isotropic · Metallization

1.21	684.8	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Metallization
material	W
thickness	0.02 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00207 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

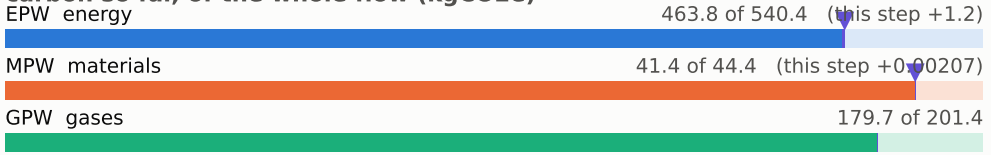


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

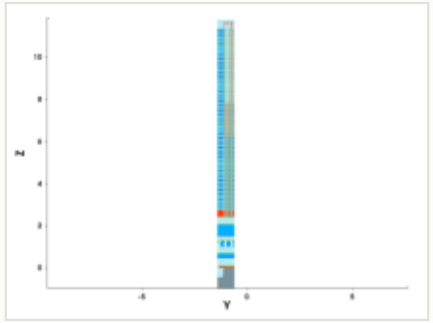


y cut at -1.035 µm

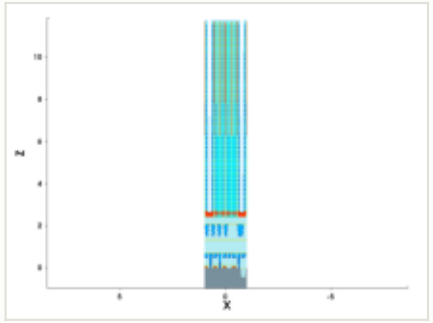

mask for this step

no mask for this step


steps by process area

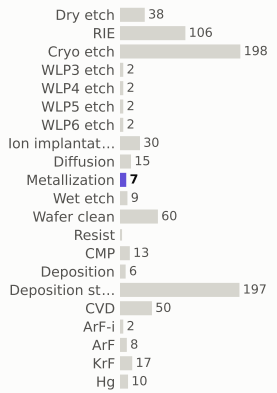

materials deposited (g)



gases emitted (g)



Step #7930: RIE

etch_isotropic · RIE

1.04	685.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

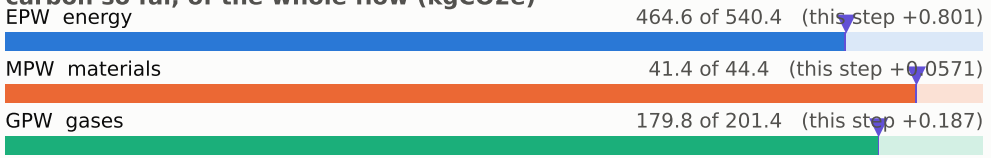


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

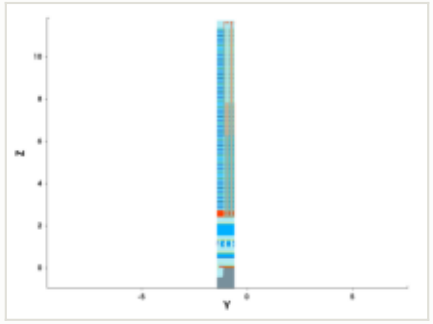


y cut at -1.035 µm

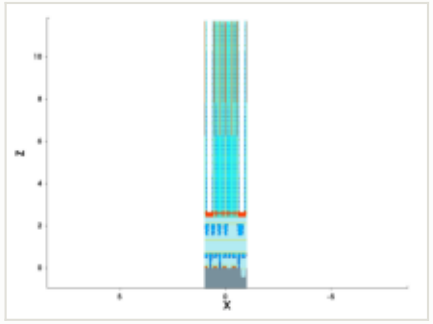


mask for this step

no mask for this step


steps by process area

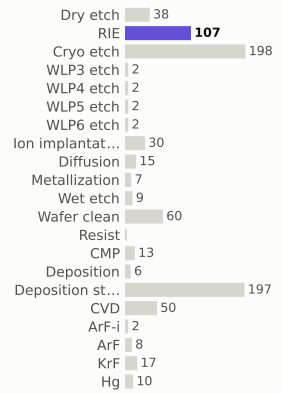

materials deposited (g)

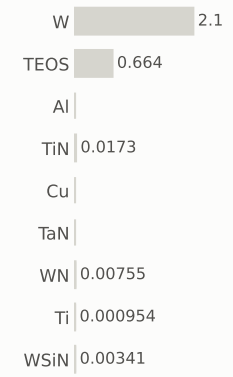

gases emitted (g)

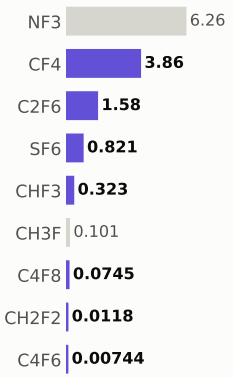

Step #7940: Deposition

depo_isotropic · Deposition

0.656	686.5	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Deposition
material	—
thickness	0.045 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

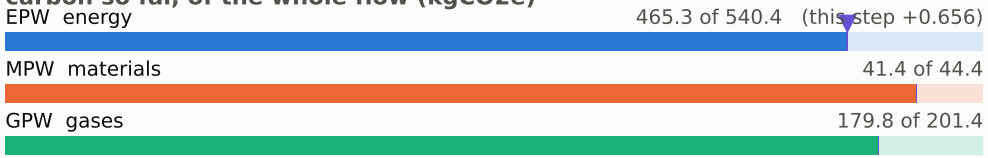


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

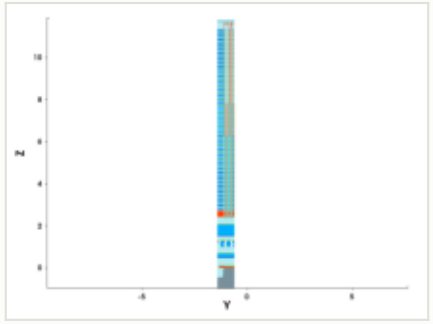


y cut at -1.035 µm

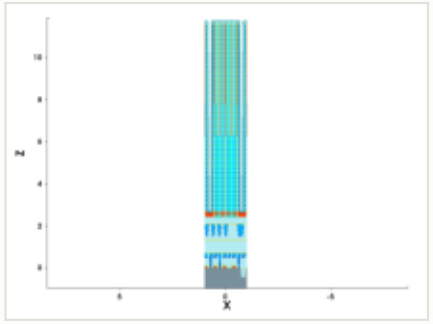


mask for this step

no mask for this step


steps by process area

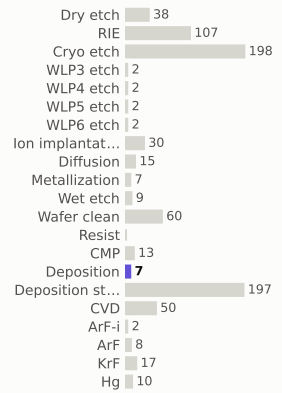

materials deposited (g)

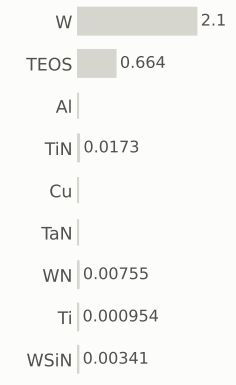

gases emitted (g)

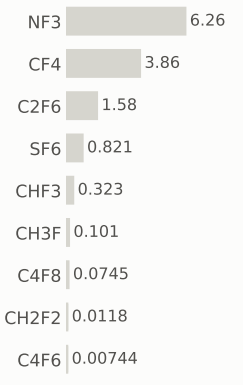

Step #7950: RIE

etch_multi_offset · RIE

1.04	687.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

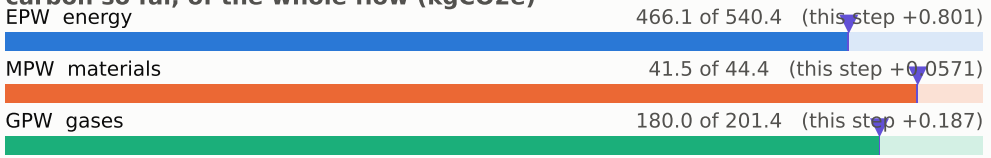


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

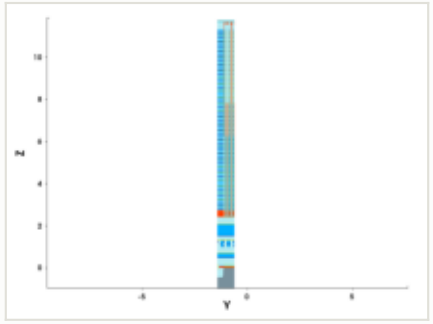


y cut at -1.035 µm

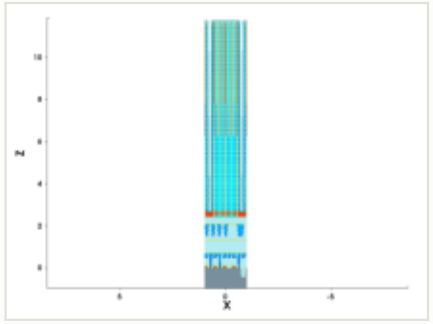


mask for this step

no mask for this step


steps by process area

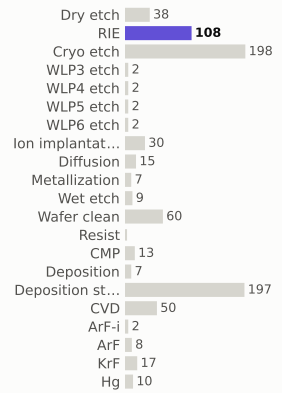

materials deposited (g)

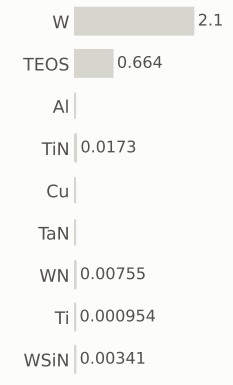

gases emitted (g)

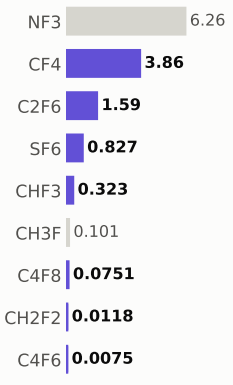

Step #7960: RIE

etch_isotropic · RIE

1.04	688.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

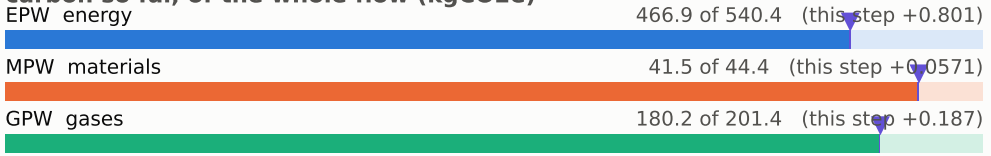


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

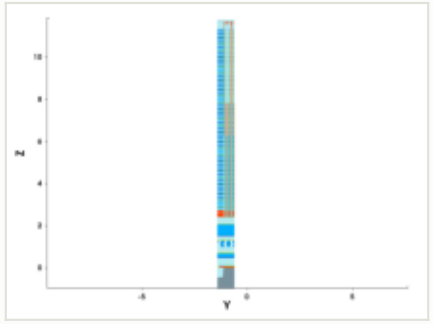


y cut at -1.035 µm

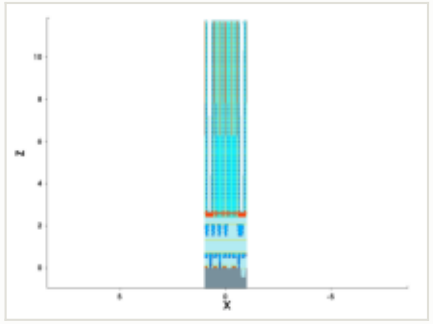


mask for this step

no mask for this step


steps by process area

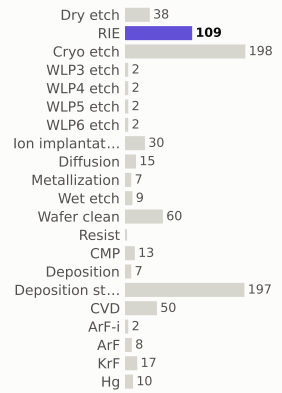

materials deposited (g)

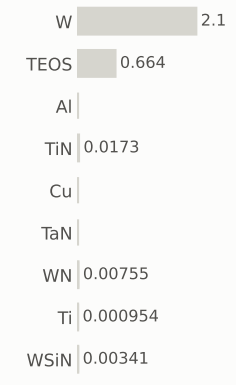

gases emitted (g)

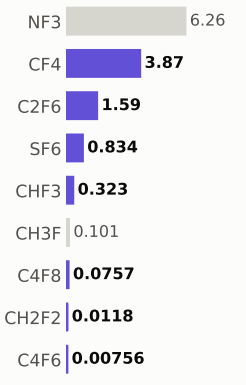

Step #7970: RIE

etch_anisotropic · RIE

1.04	689.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

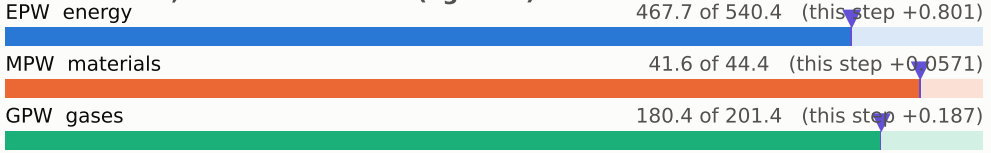


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

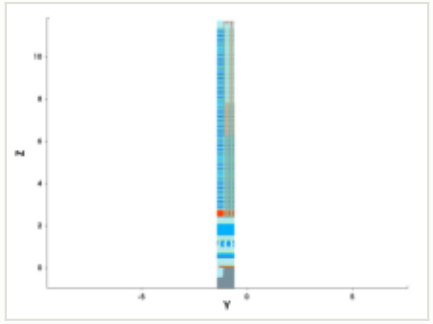


y cut at -1.035 µm

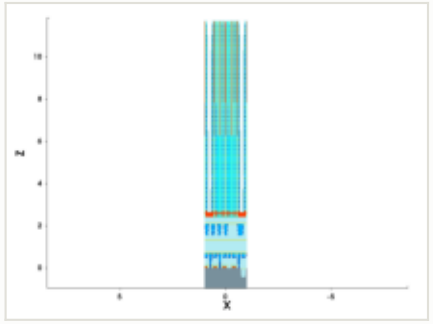

mask for this step

no mask for this step


steps by process area

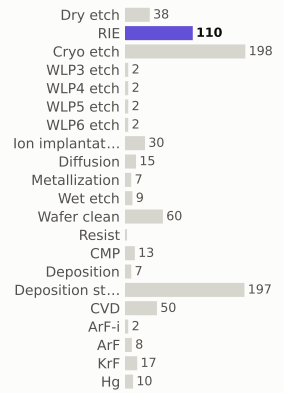

materials deposited (g)



gases emitted (g)

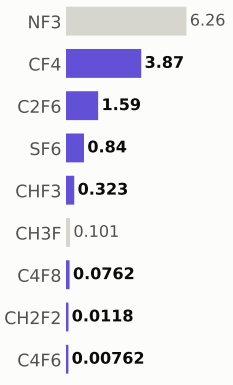

Step #7980: RIE

etch_anisotropic · RIE

1.04	690.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

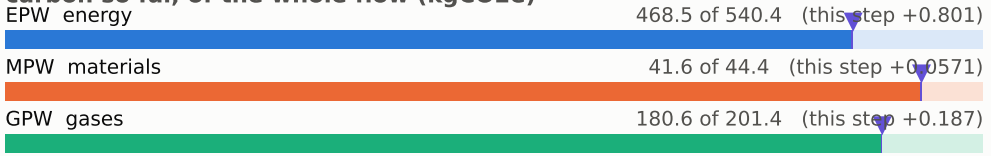


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

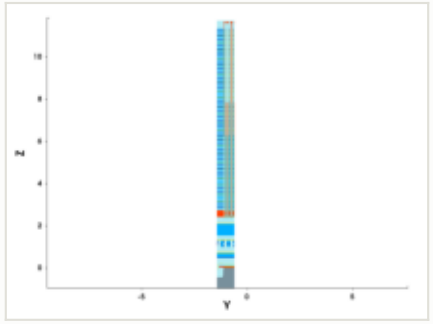


y cut at -1.035 µm

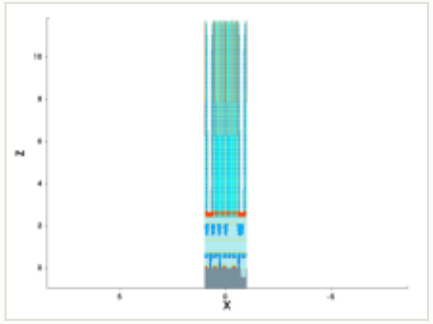


mask for this step

no mask for this step


steps by process area

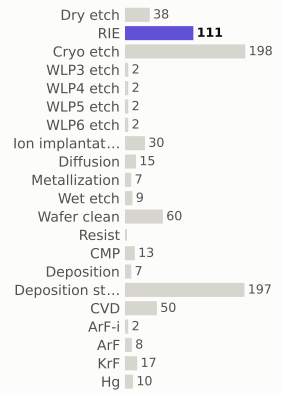

materials deposited (g)

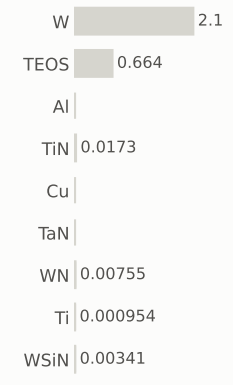

gases emitted (g)

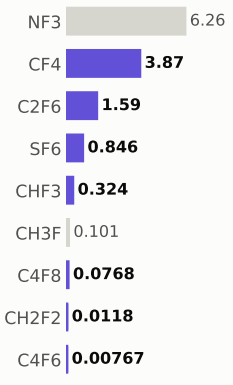

Step #7990: RIE

etch_anisotropic · RIE

1.04	691.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

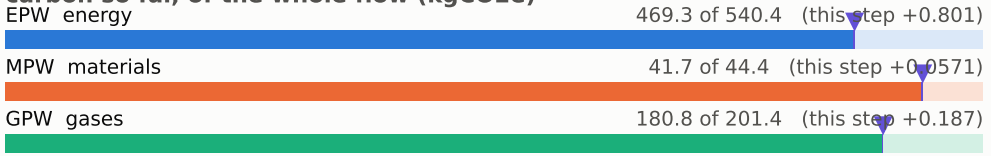


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

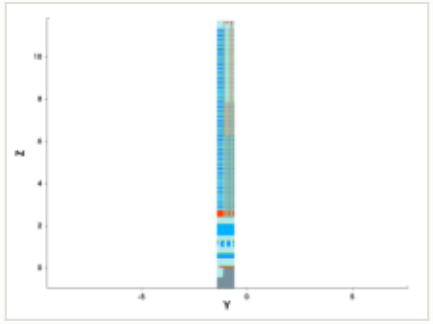


y cut at -1.035 µm

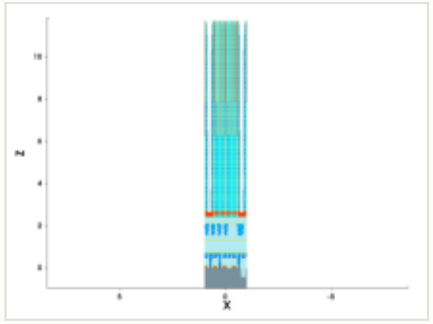


mask for this step

no mask for this step


steps by process area

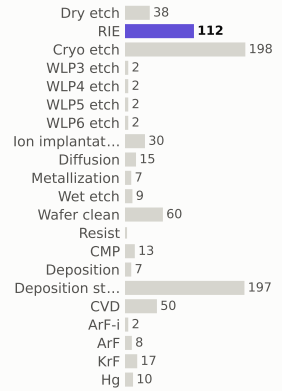

materials deposited (g)

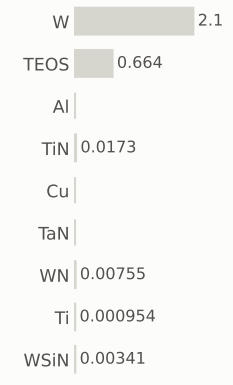

gases emitted (g)

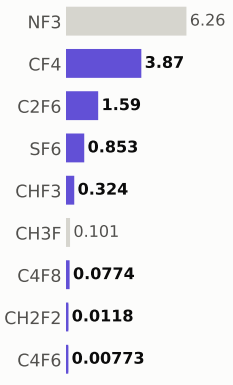

Step #8000: CVD

depo_isotropic · CVD

1.31	693.1	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

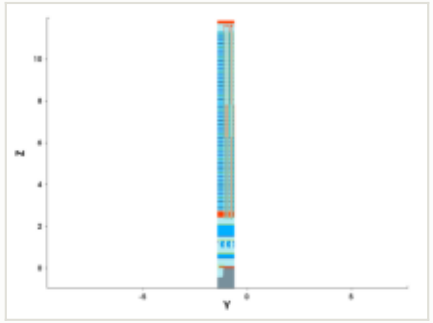

y cut at -1.035 µm

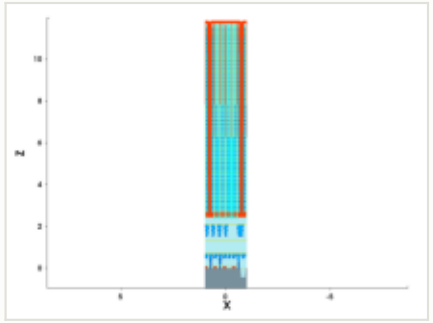

mask for this step


no mask for this step

this step


process area	CVD
material	—
thickness	0.14 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

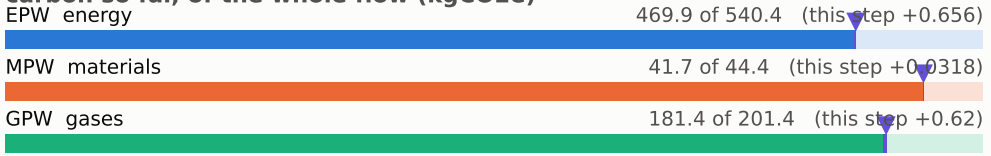


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

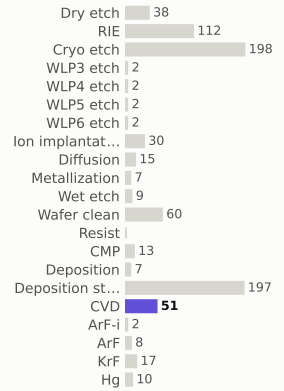

materials deposited (g)

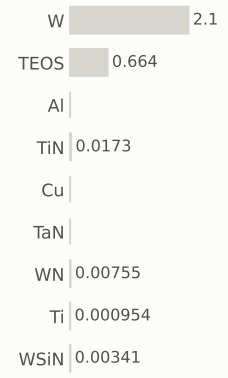

gases emitted (g)

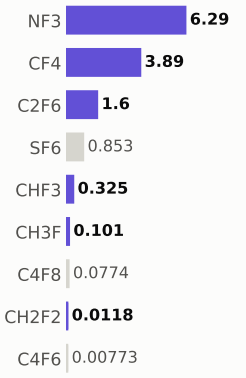

Step #8010: CMP

etch_cmp · CMP

0.169	693.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

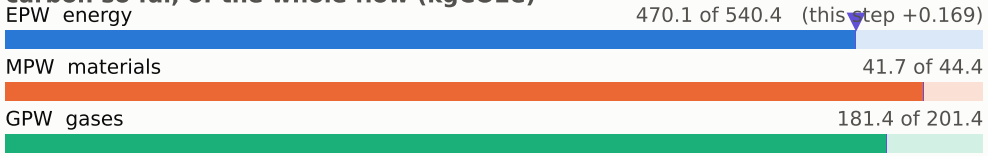


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

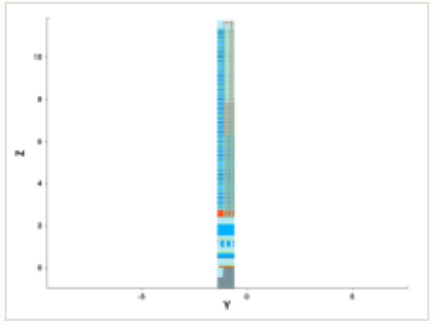


y cut at -1.035 µm

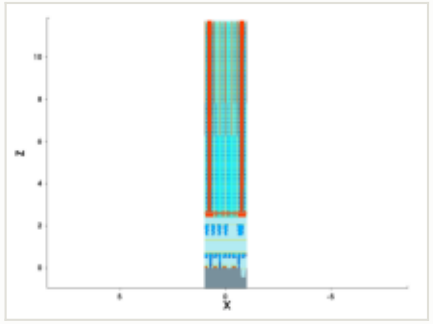

mask for this step

no mask for this step


steps by process area

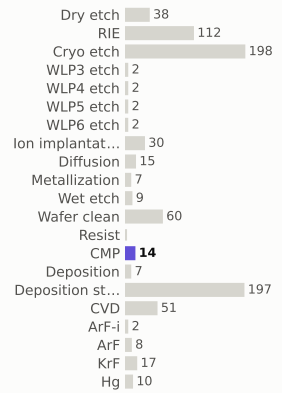

materials deposited (g)



gases emitted (g)



Step #8020: Wafer_clean


clean · Wafer_clean

0.169	693.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

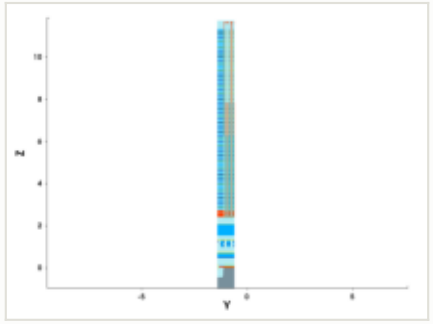

y cut at -1.035 µm

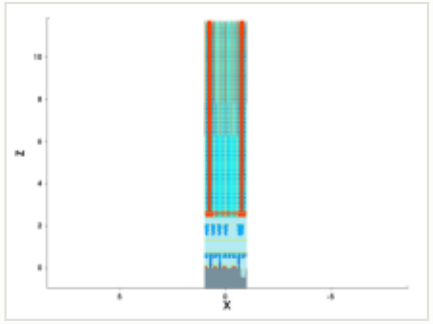

mask for this step


no mask for this step

this step


process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

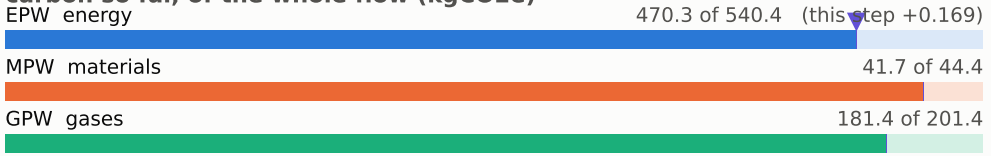


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

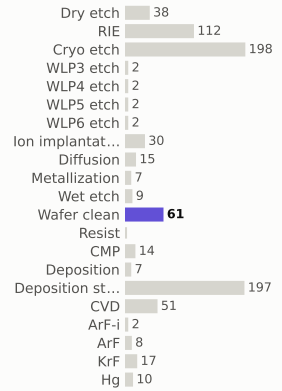

materials deposited (g)

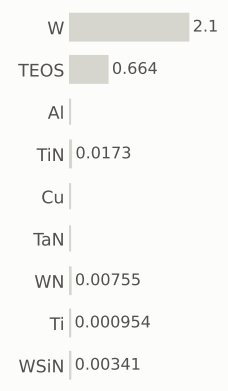

gases emitted (g)

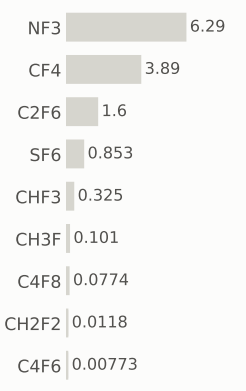

Step #8040: KrF


litho_patterning · KrF

0.199	693.6	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



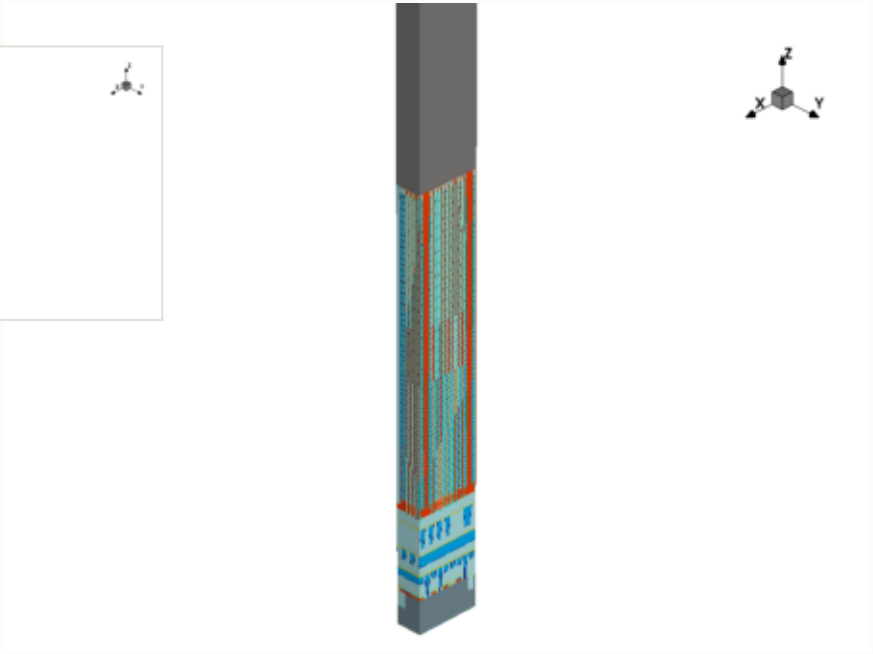


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

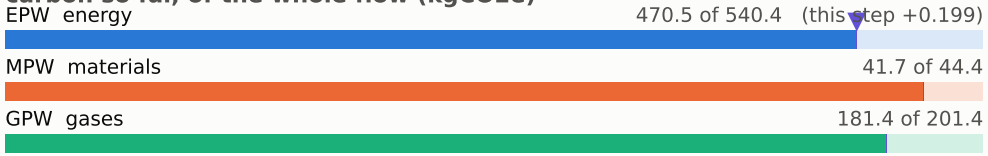


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

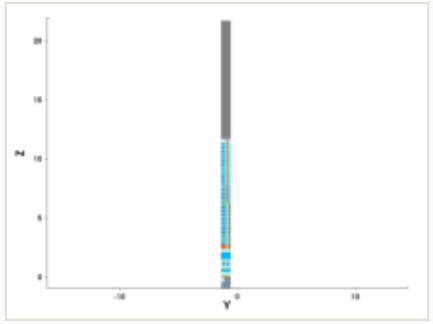


y cut at -1.035 µm

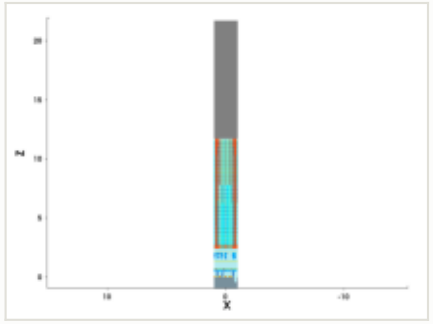

mask: layer 39:0 (OASIS)

nothing in the clip window


steps by process area

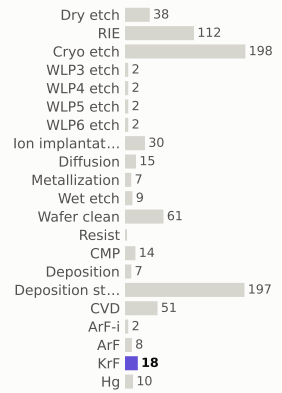

materials deposited (g)



gases emitted (g)



Step #8050: RIE


etch_anisotropic · RIE

1.04	694.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



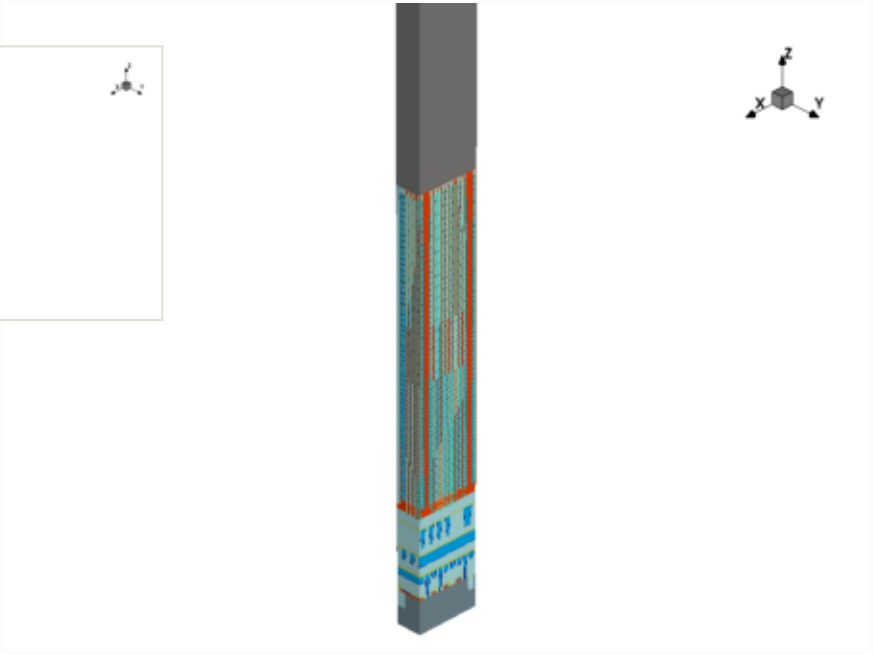


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

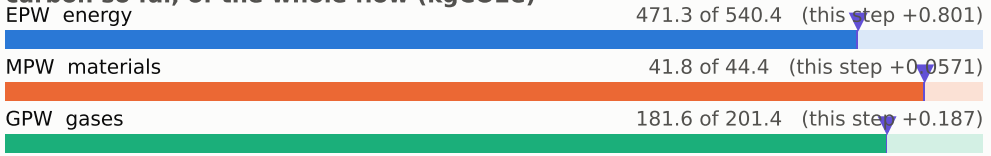


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

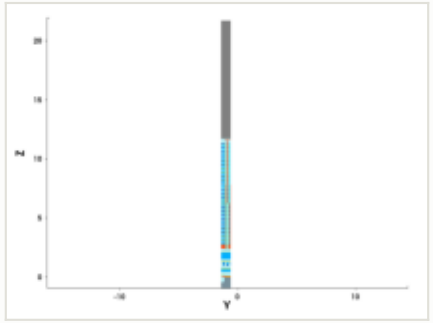


y cut at -1.035 µm

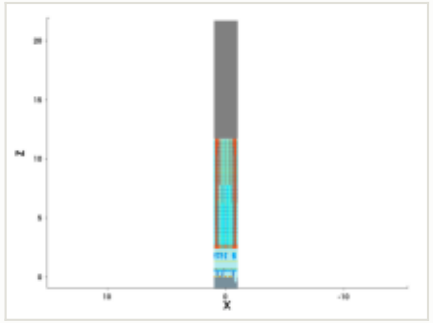

mask for this step

no mask for this step


steps by process area



materials deposited (g)



gases emitted (g)

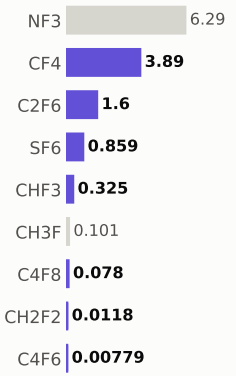

Step #8060: Dry_etch

etch_strip · Dry_etch

0.801	695.4	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

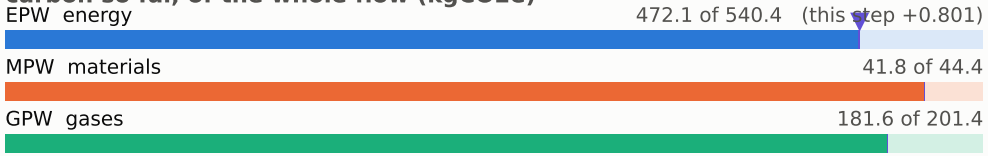


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

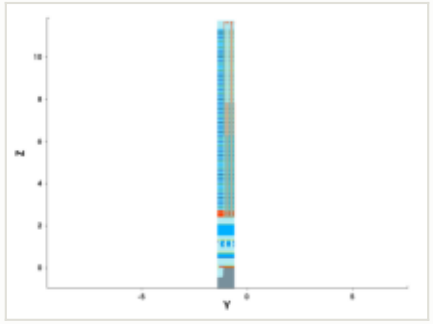


y cut at -1.035 µm

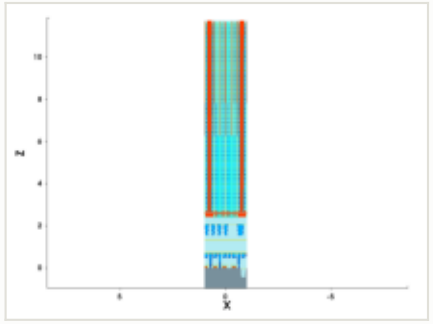

mask for this step

no mask for this step


steps by process area

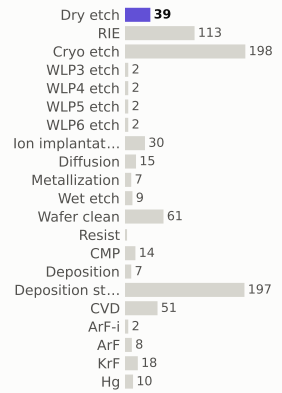

materials deposited (g)



gases emitted (g)



Step #8070: Wafer_clean

clean · Wafer_clean

0.169	695.6	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

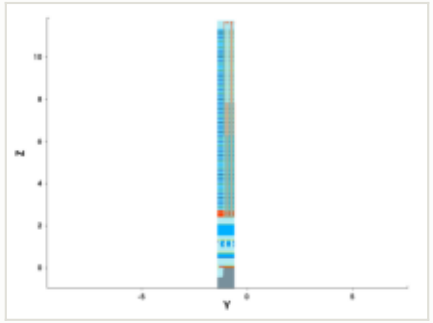

y cut at -1.035 µm

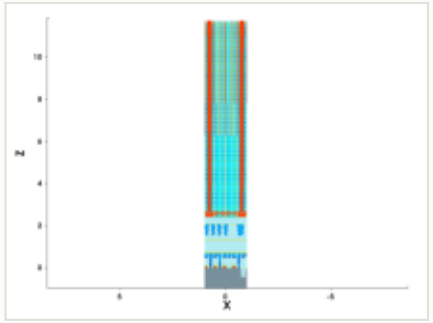

mask for this step

no mask for this step


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

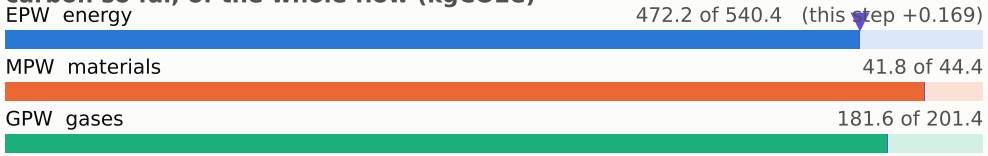

embodied carbon up to each step (kgCO2e per wafer)




steps by process area

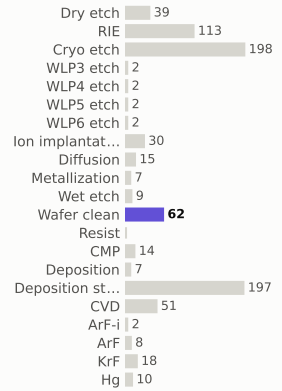

materials deposited (g)



gases emitted (g)

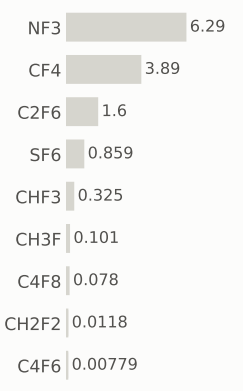

Step #8080: Deposition

depo_isotropic · Deposition

0.656	696.3	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Deposition
material	—
thickness	0.02 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

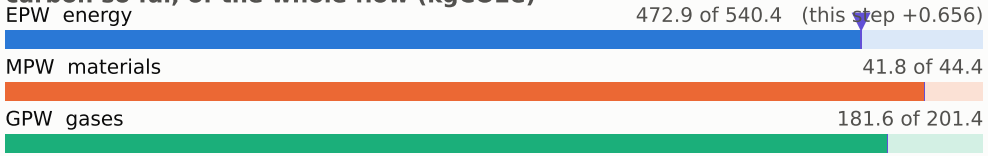


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

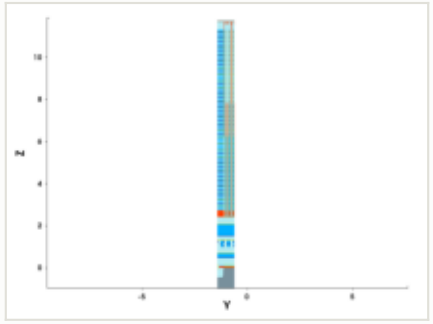


y cut at -1.035 µm

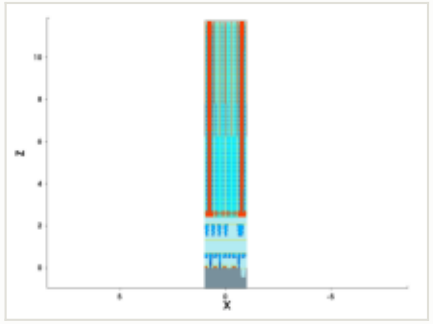

mask for this step

no mask for this step


steps by process area

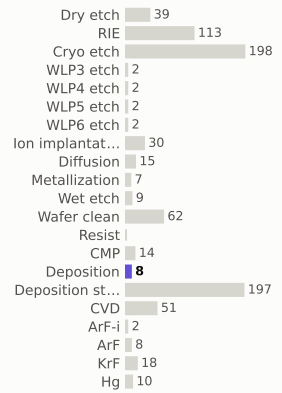

materials deposited (g)



gases emitted (g)



Step #8090: RIE

etch_anisotropic · RIE

1.04	697.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

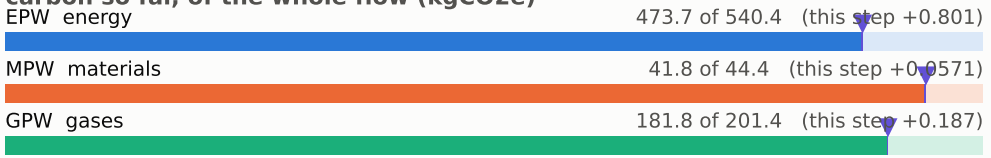


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

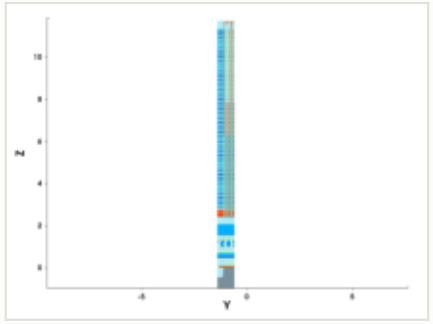


y cut at -1.035 µm

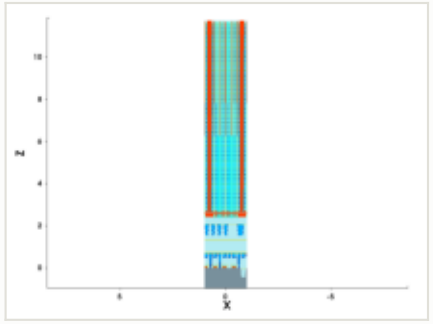

mask for this step

no mask for this step


steps by process area

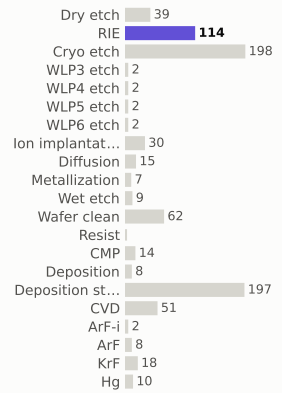

materials deposited (g)



gases emitted (g)

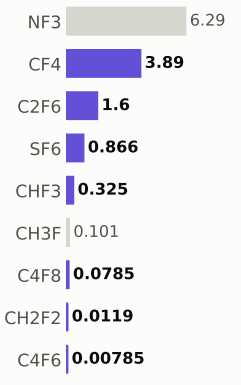

Step #8100: Deposition


depo_isotropic · Deposition

0.656	698.0	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



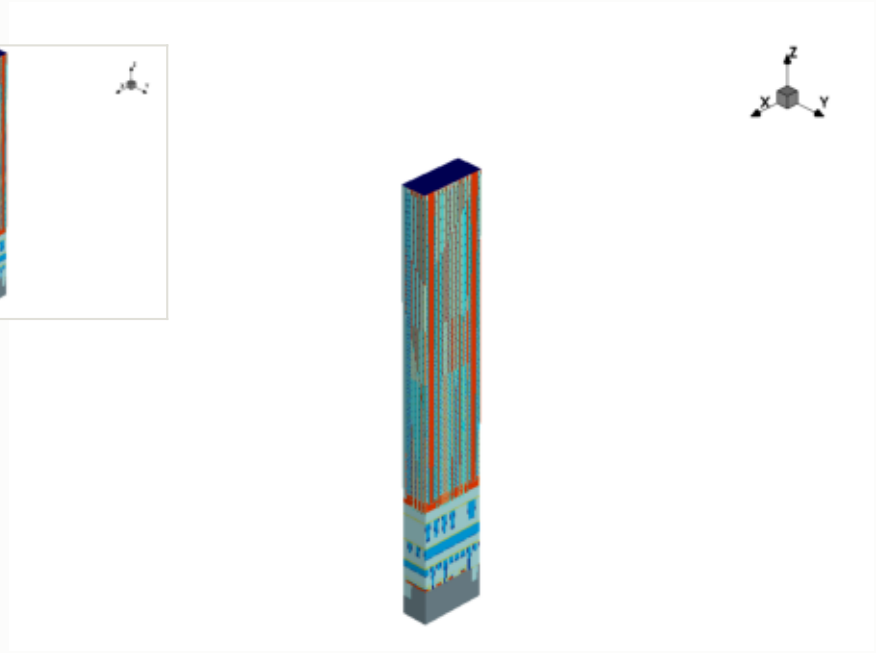


this step

process area	Deposition
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000162 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

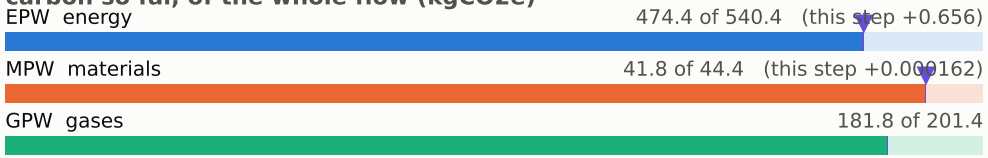


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

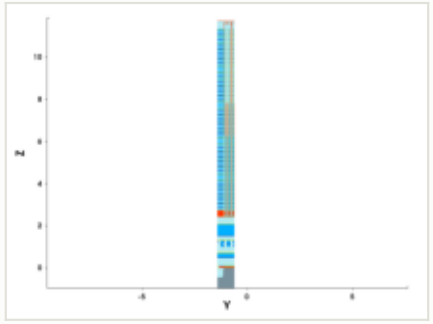


y cut at -1.035 µm

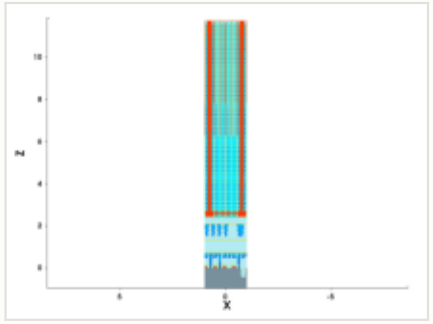


mask for this step

no mask for this step


steps by process area

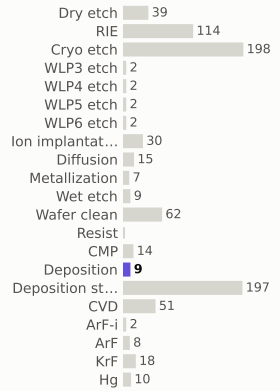

materials deposited (g)



gases emitted (g)

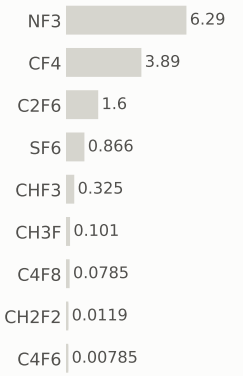

Step #8110: Metallization

depo_isotropic · Metallization

1.23	699.2	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Metallization
material	W
thickness	0.25 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0259 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.23 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

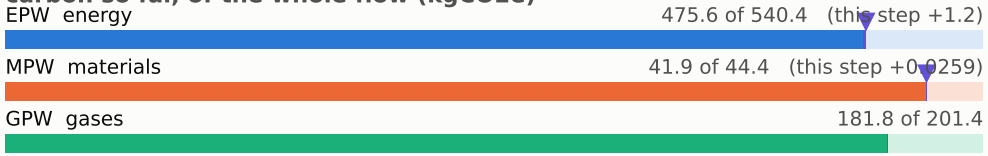


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

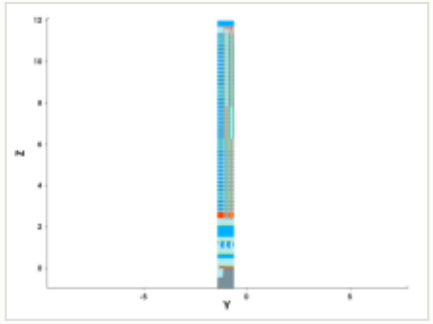


y cut at -1.035 µm

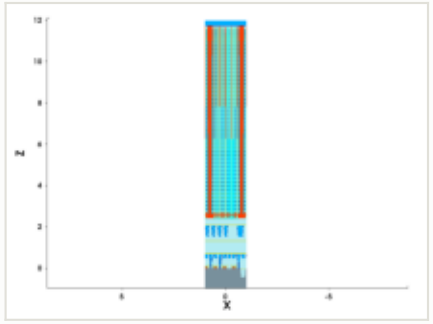


mask for this step

no mask for this step


steps by process area

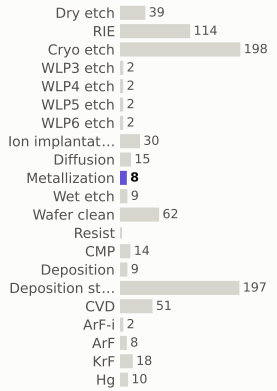

materials deposited (g)

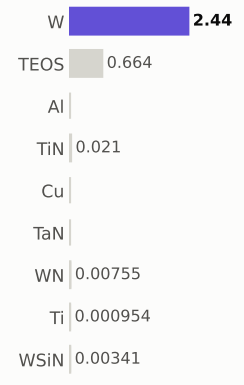

gases emitted (g)



Step #8120: CMP

etch_cmp · CMP

0.169	699.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

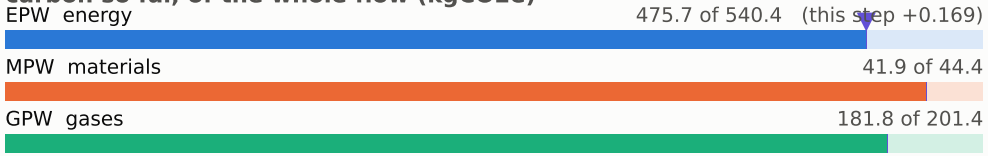


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

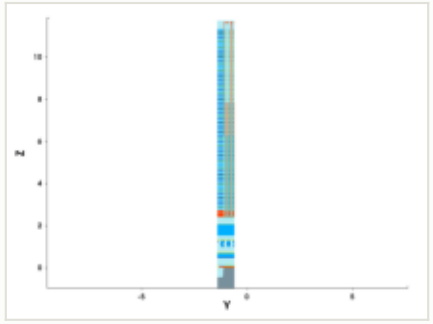


y cut at -1.035 µm

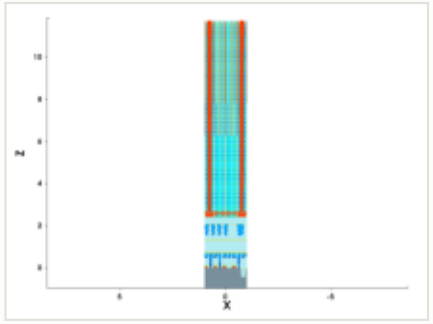


mask for this step

no mask for this step


steps by process area

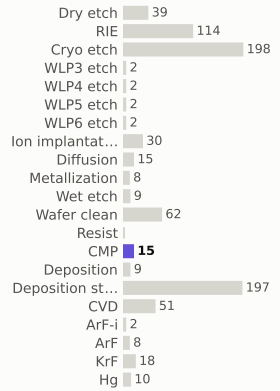

materials deposited (g)

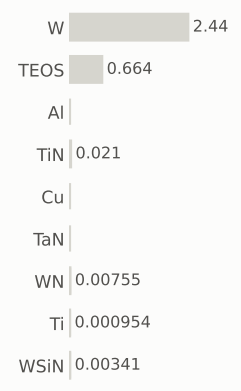

gases emitted (g)



Step #8130: Wafer_clean

clean · Wafer_clean

0.169	699.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

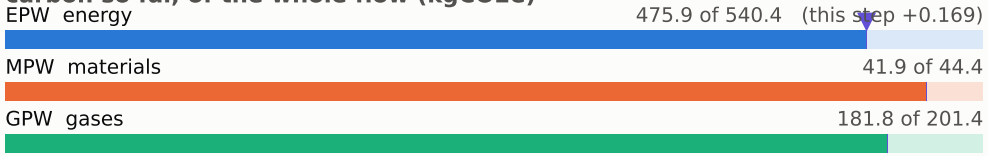


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

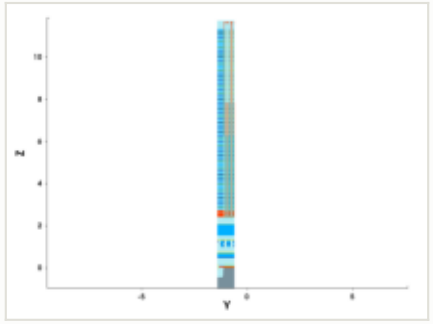


y cut at -1.035 µm

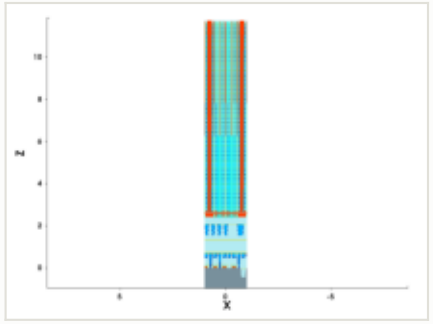


mask for this step

no mask for this step


steps by process area

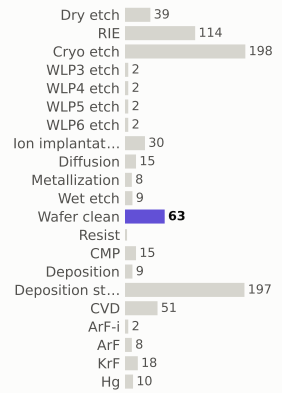

materials deposited (g)

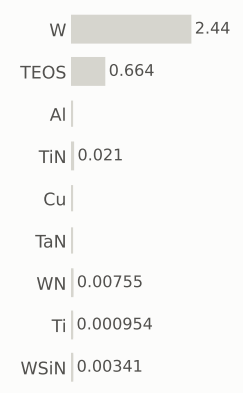

gases emitted (g)

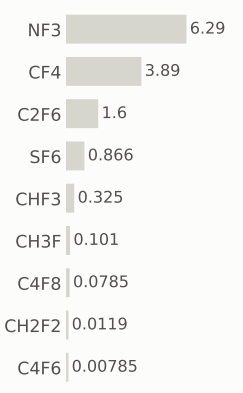

Step #8140: CVD

depo_isotropic · CVD

1.31	700.8	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CVD
material	—
thickness	0.027 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

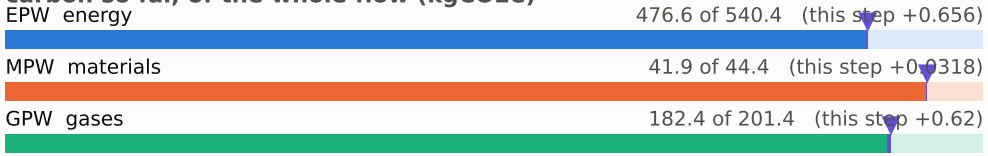


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

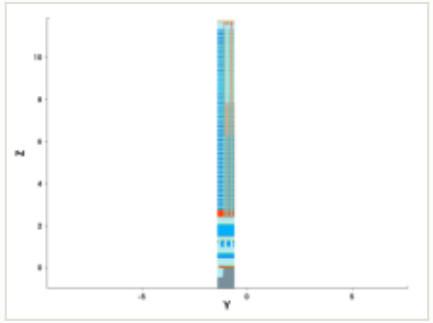


y cut at -1.035 µm

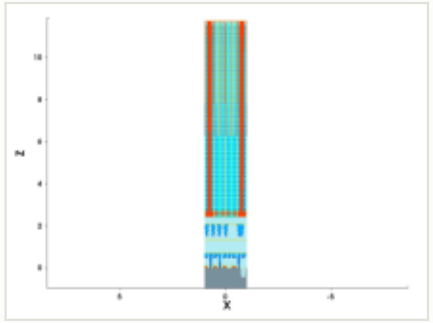


mask for this step

no mask for this step


steps by process area

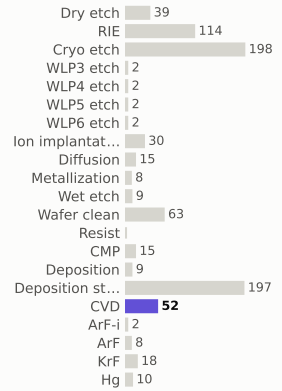

materials deposited (g)

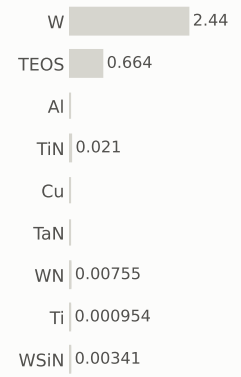

gases emitted (g)



Step #8160: CVD

depo_isotropic · CVD

1.31	702.2	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.045 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

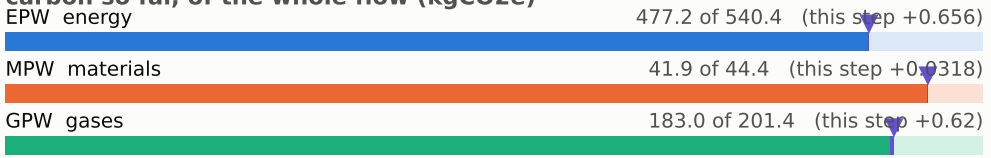


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

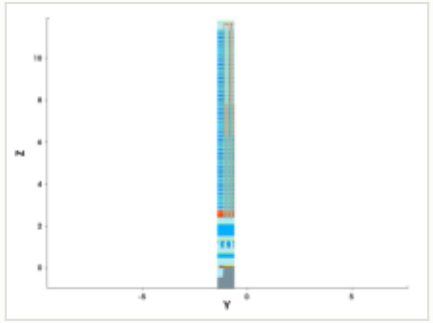


y cut at -1.035 µm

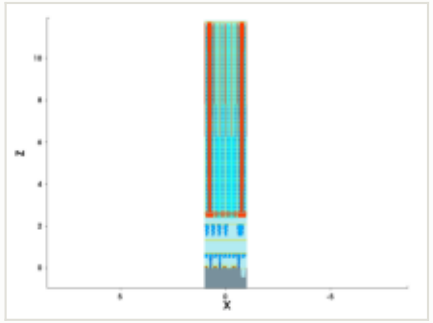


mask for this step

no mask for this step


steps by process area

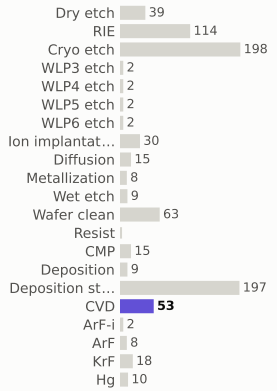

materials deposited (g)

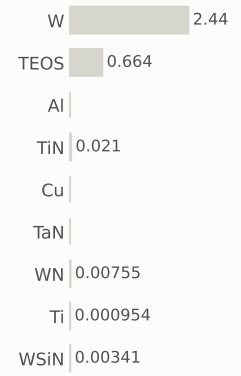

gases emitted (g)



Step #8170: KrF


litho_patterning · KrF

0.199	702.4	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



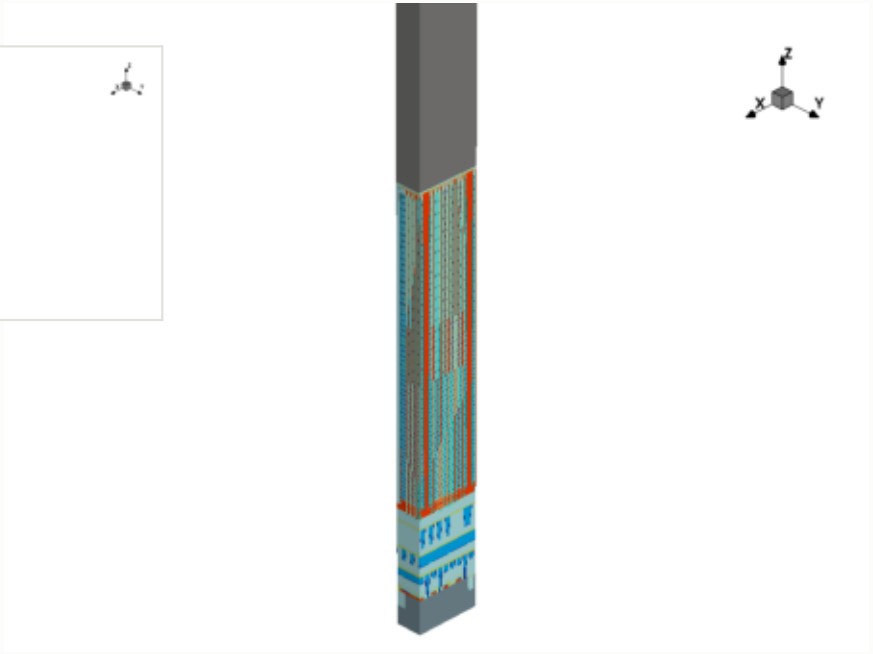


this step

process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

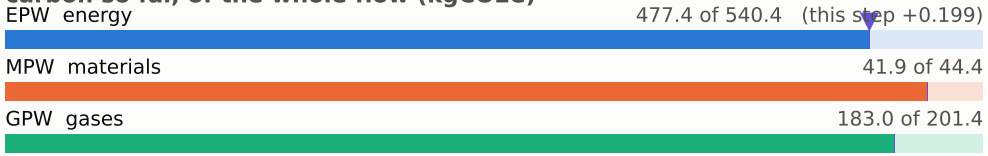


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

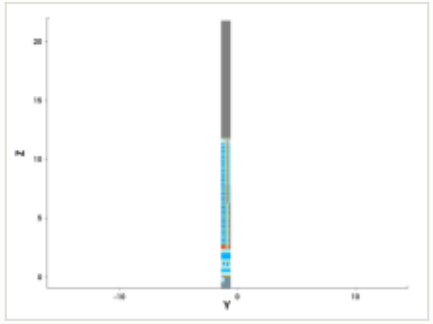


y cut at -1.035 µm

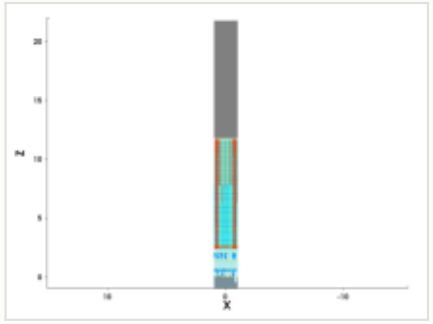


mask: layer 40:0, positive (OASIS)




steps by process area

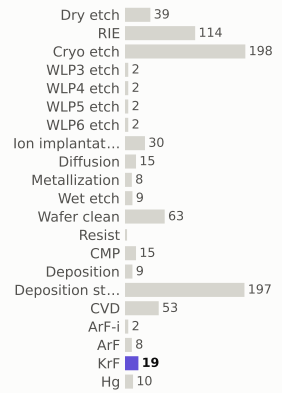

materials deposited (g)

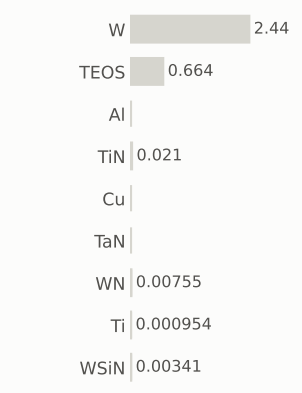

gases emitted (g)

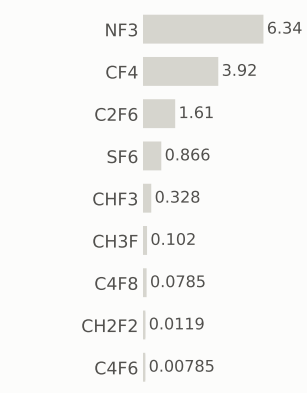

Step #8180: RIE


etch_anisotropic · RIE

1.04	703.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



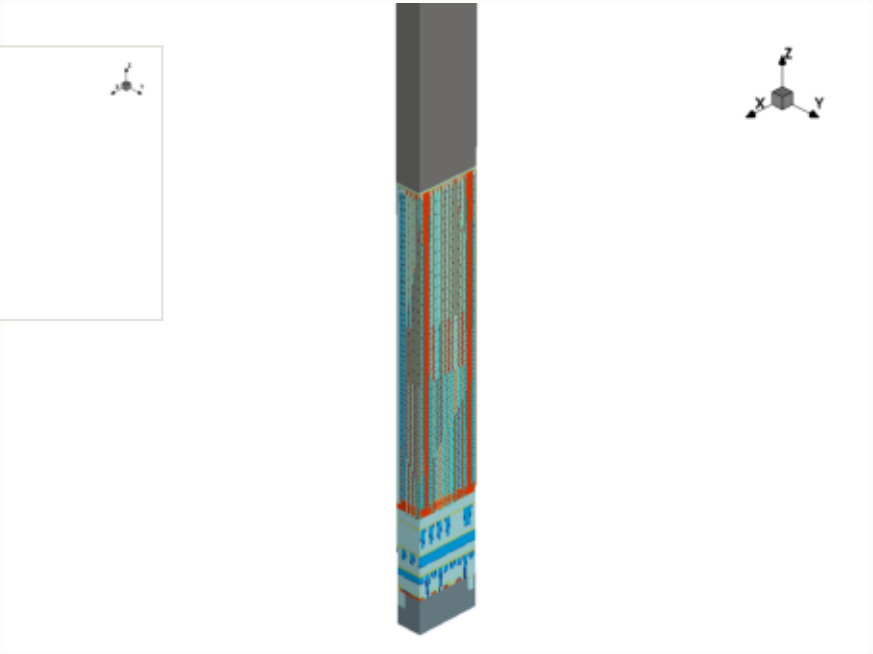


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

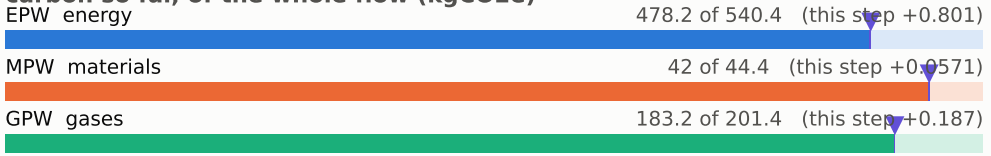


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

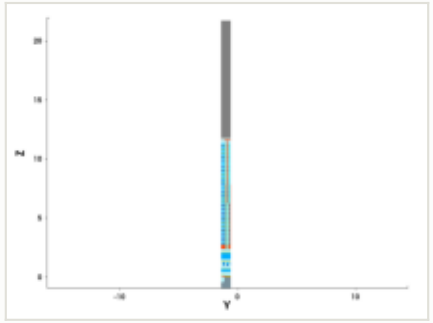


y cut at -1.035 µm

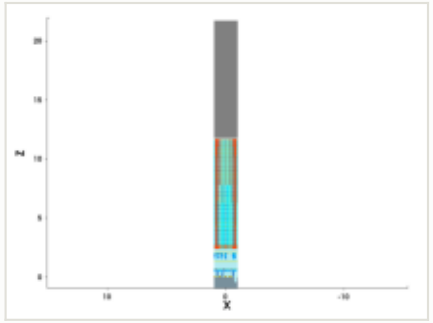


mask for this step

no mask for this step


steps by process area

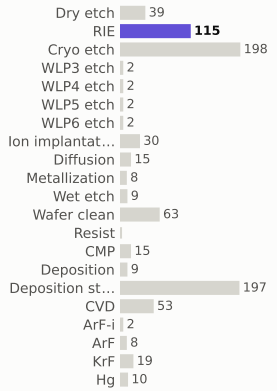

materials deposited (g)

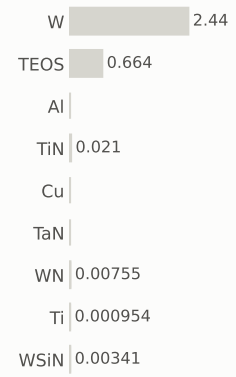

gases emitted (g)



Step #8190: RIE


etch_anisotropic · RIE

1.04	704.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



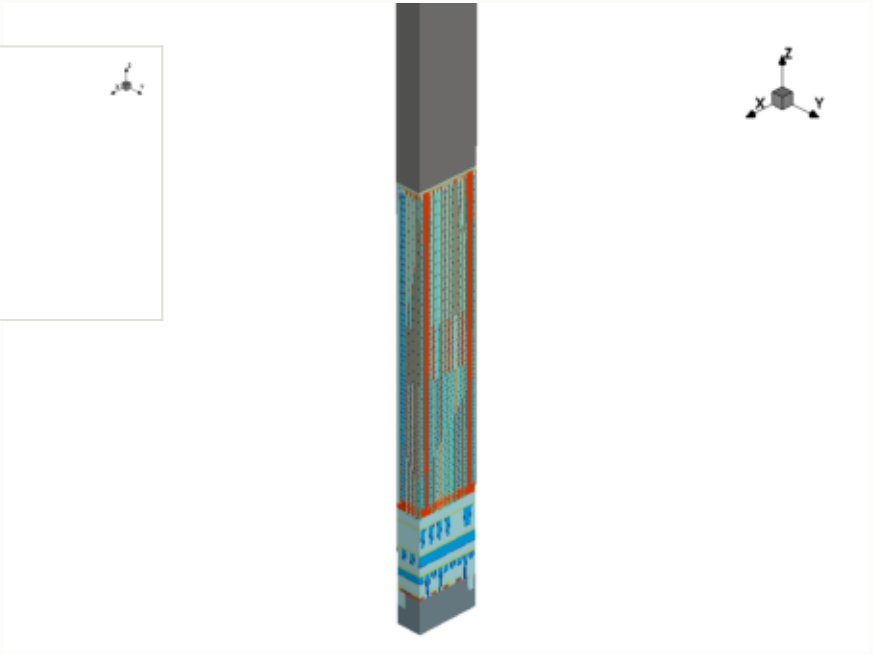


this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

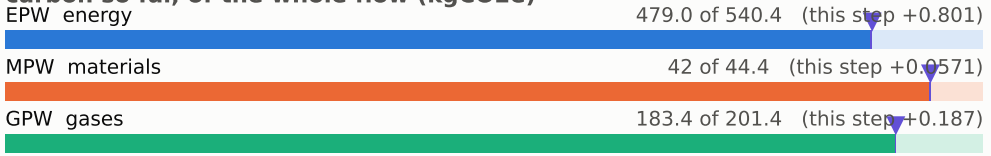


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

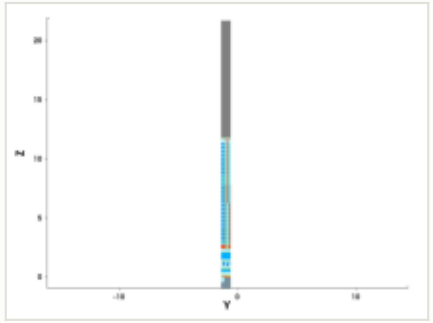


y cut at -1.035 µm

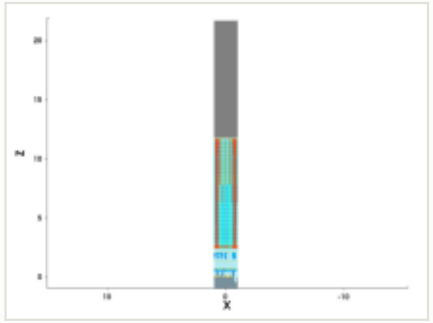


mask for this step

no mask for this step


steps by process area

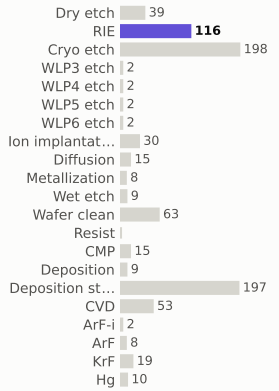

materials deposited (g)

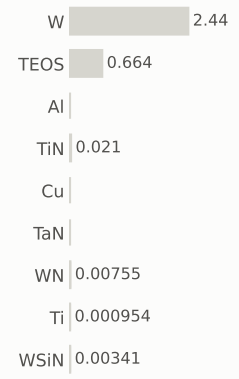

gases emitted (g)

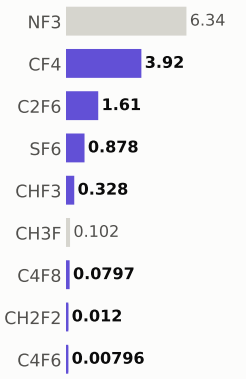

Step #8200: RIE

etch_anisotropic · RIE

1.04	705.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

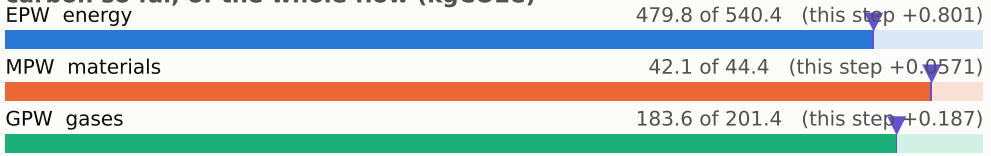


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

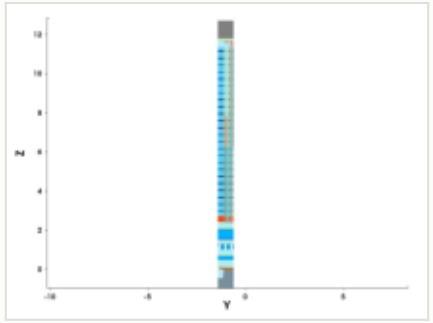


y cut at -1.035 µm

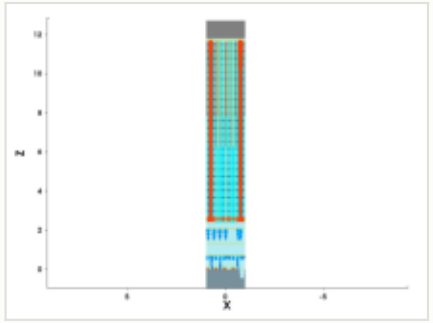


mask for this step

no mask for this step


steps by process area

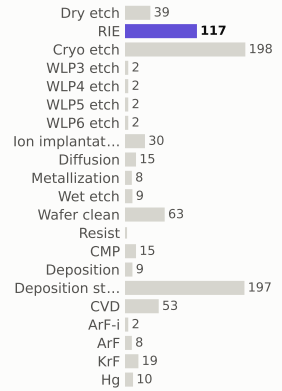

materials deposited (g)

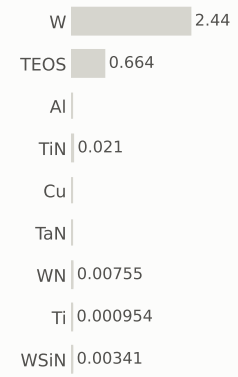

gases emitted (g)



Step #8210: Dry_etch

etch_strip · Dry_etch

0.801	706.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Dry_etch	EPW	0.801 kgCO2e
material	—	EPW tool	0.572 kgCO2e
thickness	—	EPW overhead	0.229 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	1.33 kWh + 0.532 overhead	embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

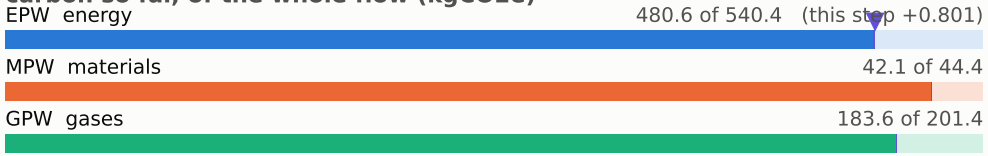


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

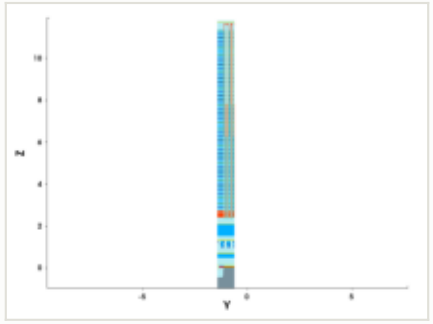


y cut at -1.035 µm

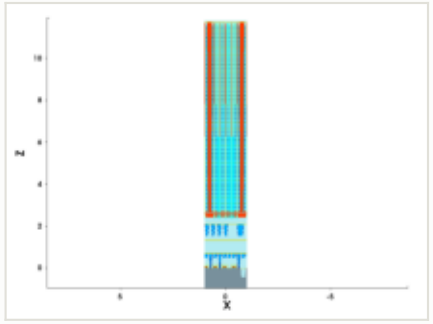


mask for this step

no mask for this step


steps by process area

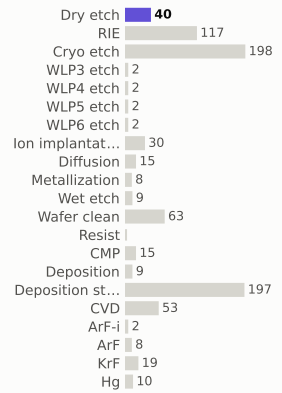

materials deposited (g)

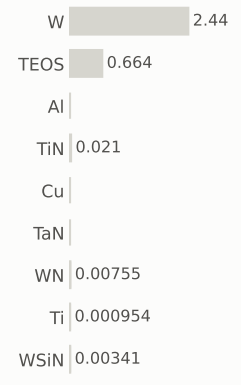

gases emitted (g)

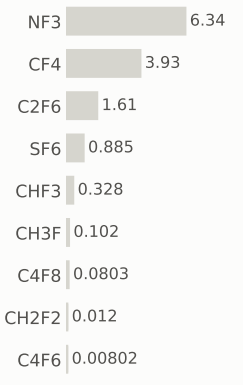

Step #8220: Wafer_clean

clean · Wafer_clean

0.169	706.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

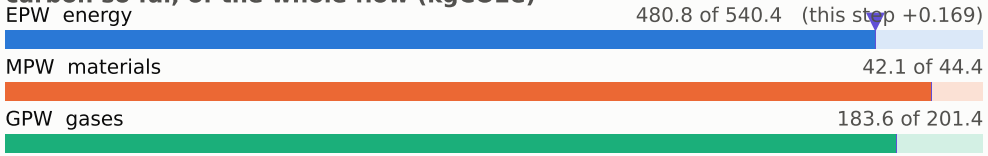


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

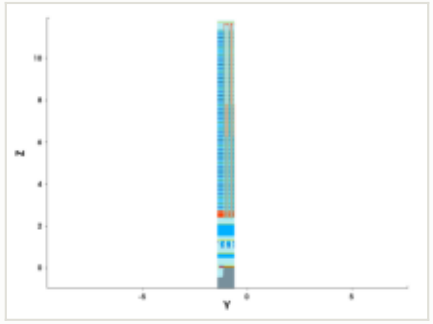


y cut at -1.035 µm

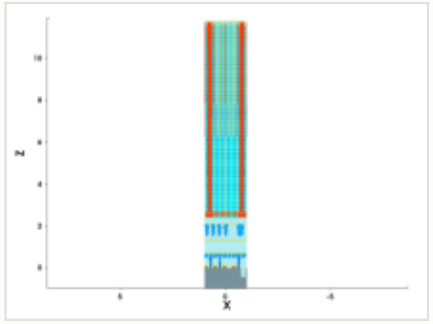


mask for this step

no mask for this step


steps by process area

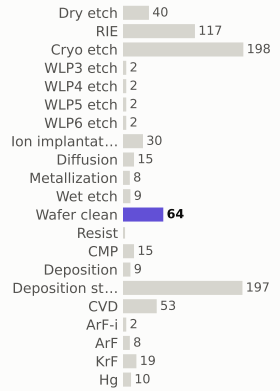

materials deposited (g)

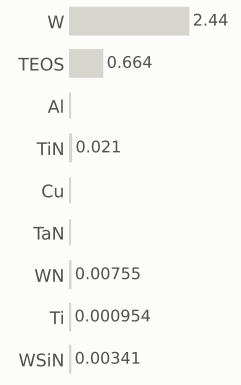

gases emitted (g)



Step #8230: Deposition


depo_isotropic · Deposition

0.656	707.1	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



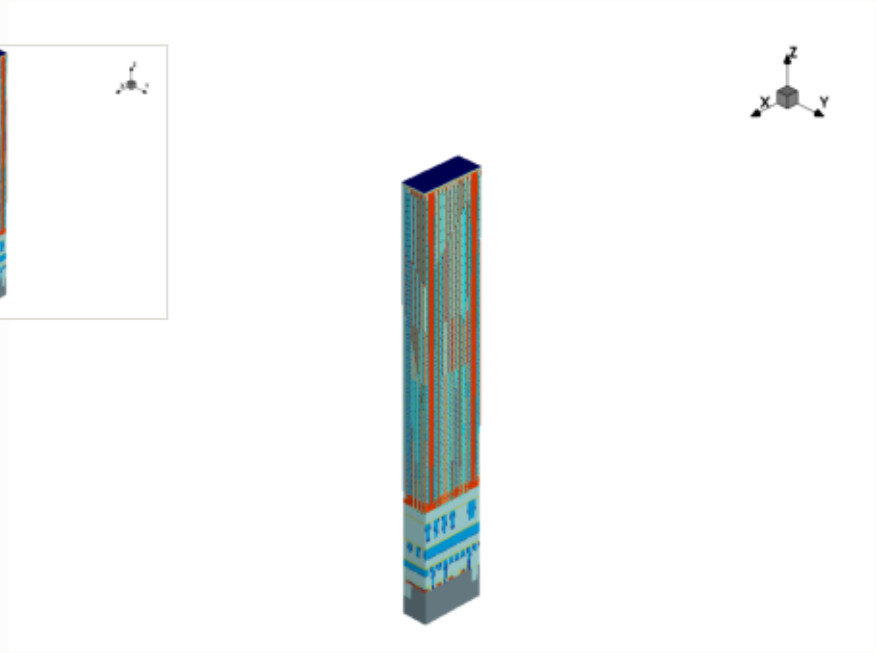


this step

process area	Deposition
material	TiN
thickness	0.01 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000162 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

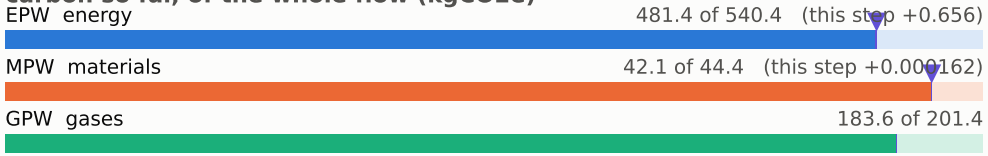


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

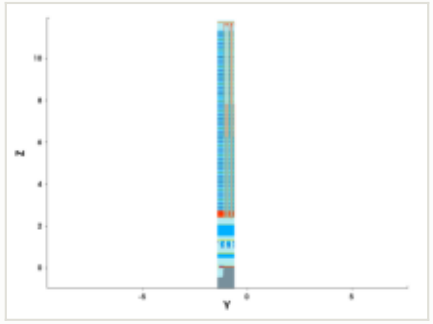


y cut at -1.035 µm

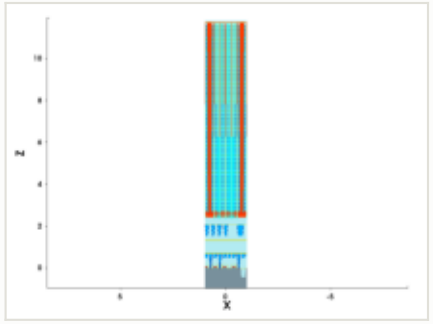


mask for this step

no mask for this step


steps by process area

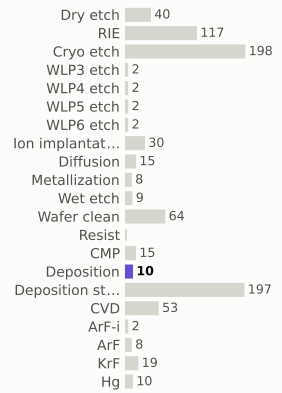

materials deposited (g)

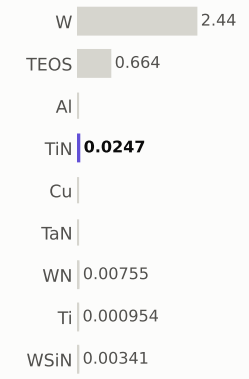

gases emitted (g)

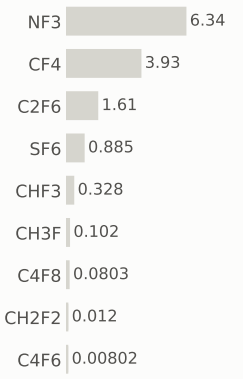

Step #8240: Metallization

depo_isotropic · Metallization

1.23	708.3	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Metallization
material	W
thickness	0.25 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0259 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.23 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

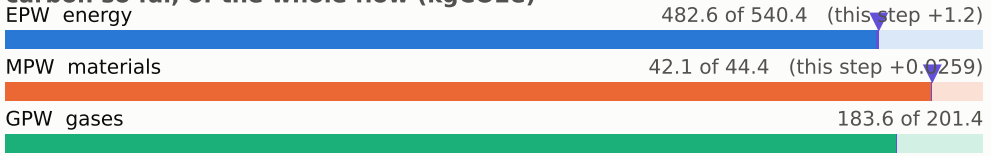


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

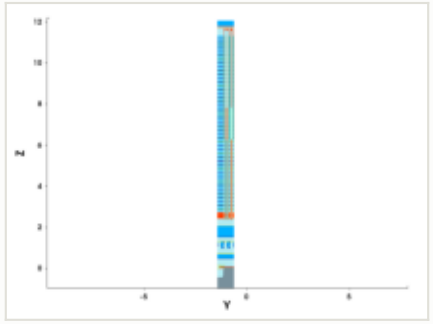


y cut at -1.035 µm

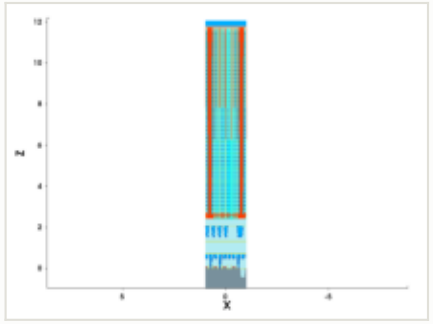


mask for this step

no mask for this step


steps by process area

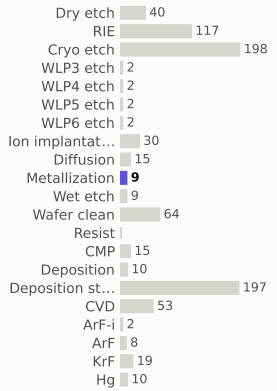

materials deposited (g)

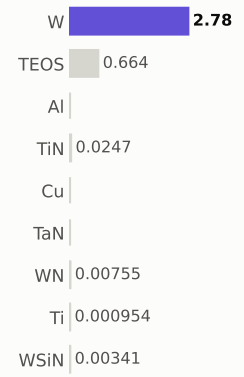

gases emitted (g)

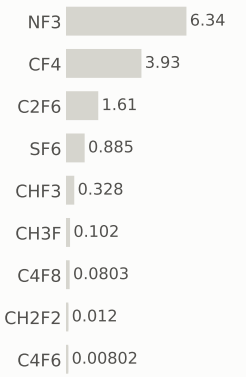

Step #8250: CMP

etch_cmp · CMP

0.169	708.5	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

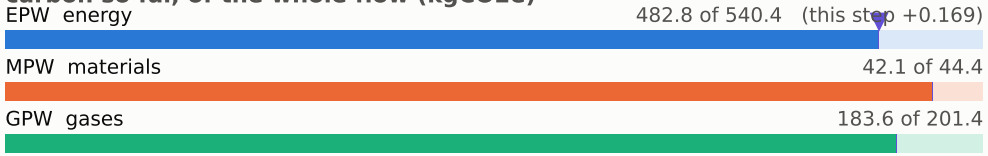


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

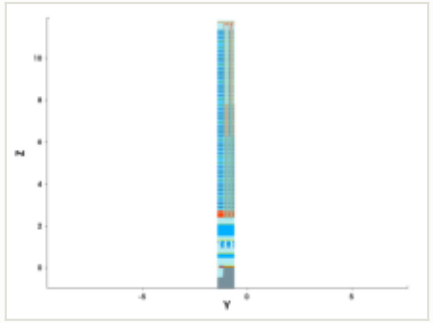


y cut at -1.035 µm

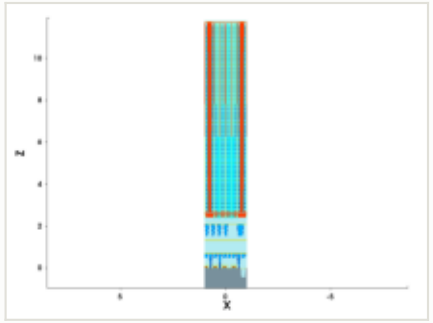


mask for this step

no mask for this step


steps by process area

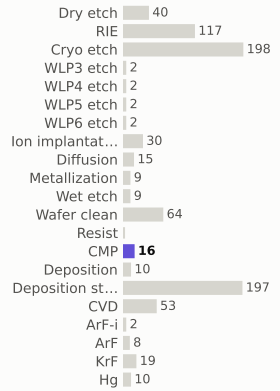

materials deposited (g)

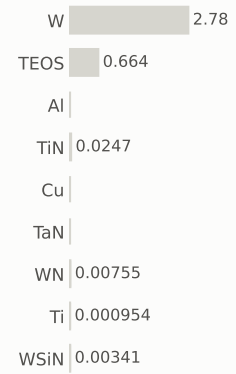

gases emitted (g)



Step #8260: Wafer_clean

clean · Wafer_clean

0.169	708.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

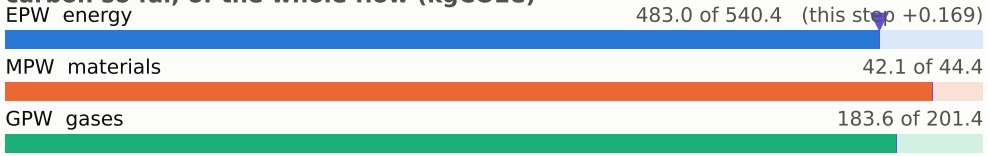


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

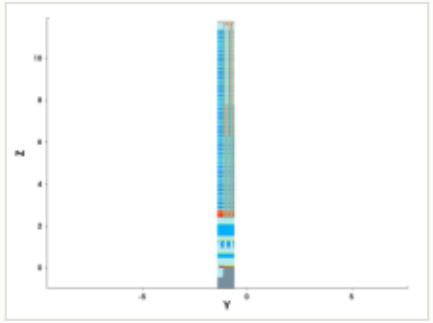


y cut at -1.035 µm

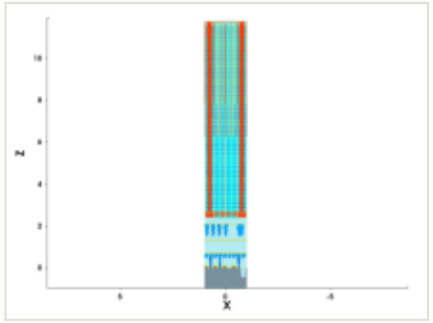


mask for this step

no mask for this step


steps by process area

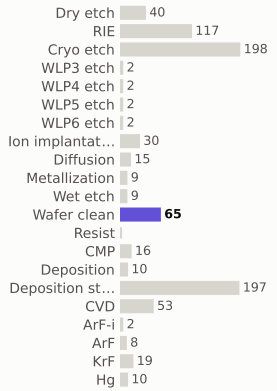

materials deposited (g)

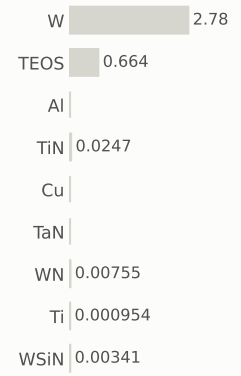

gases emitted (g)



Step #8280: CVD

depo_isotropic · CVD

1.31	710.0	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

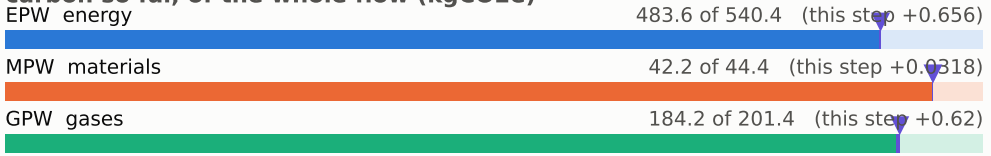


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

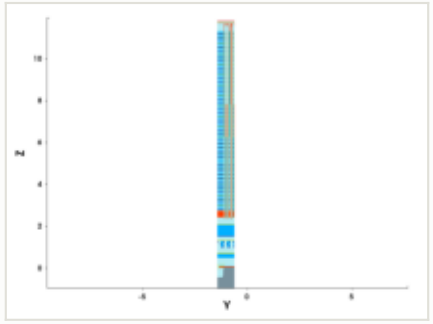


y cut at -1.035 µm

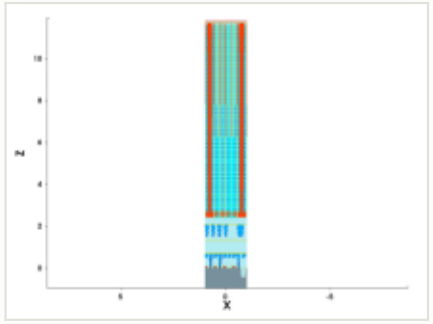


mask for this step

no mask for this step


steps by process area

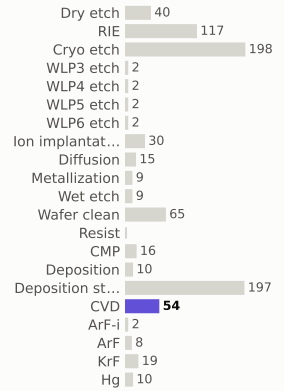

materials deposited (g)



gases emitted (g)



Step #8290: Wafer_clean

clean · Wafer_clean

0.169	710.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

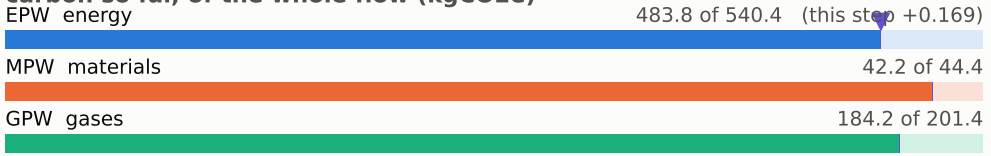


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

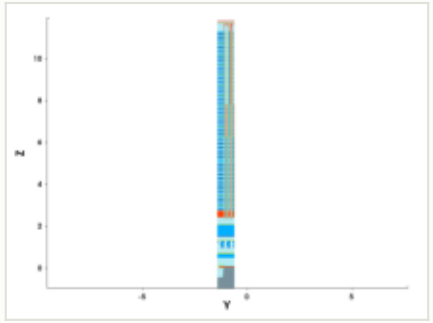


y cut at -1.035 µm

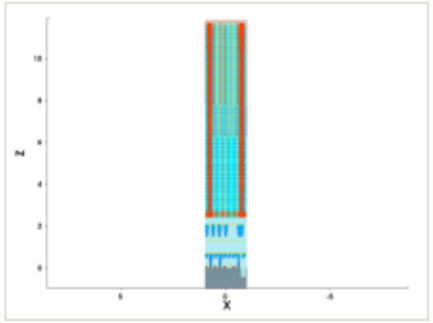


mask for this step

no mask for this step


steps by process area

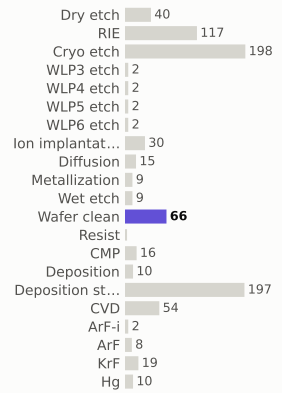

materials deposited (g)

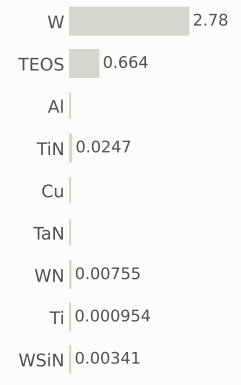

gases emitted (g)



Step #8300: ArF-i

litho_patterning · ArF-i

0.217	710.4	0.028%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

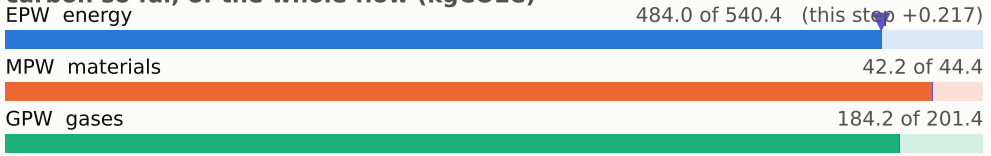


embodied carbon up to each step (kgCO2e per wafer)




x cut at 0.000 µm

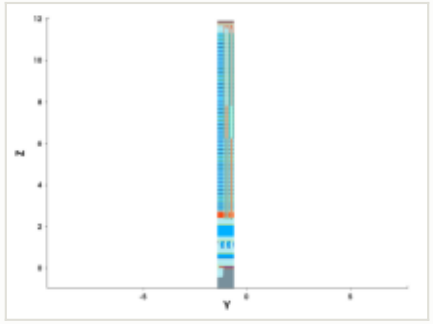


y cut at -1.035 µm

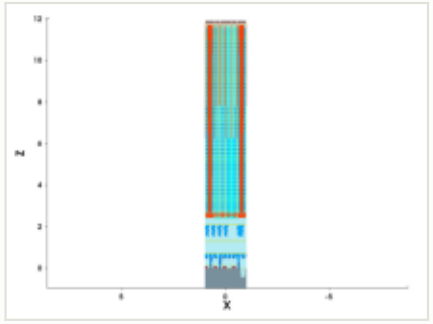


mask: layer 41:0 (OASIS)

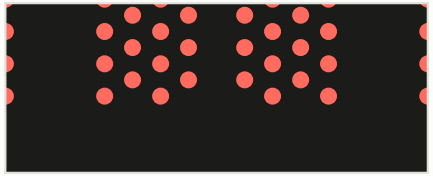


steps by process area

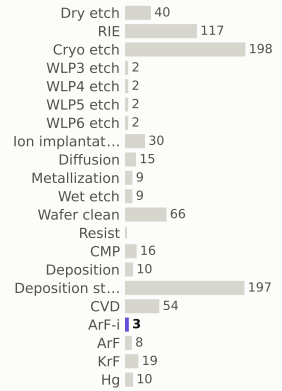

materials deposited (g)

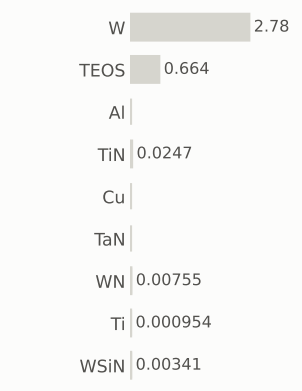

gases emitted (g)

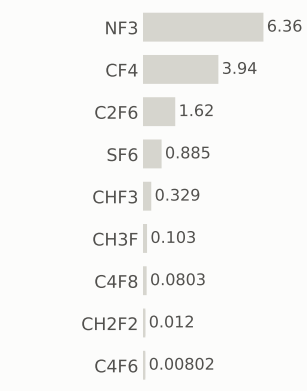

Step #8310: RIE

etch_anisotropic · RIE

1.04	711.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

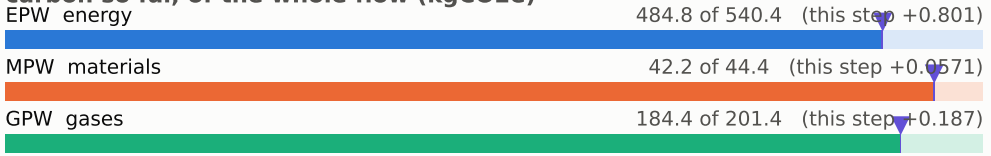


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

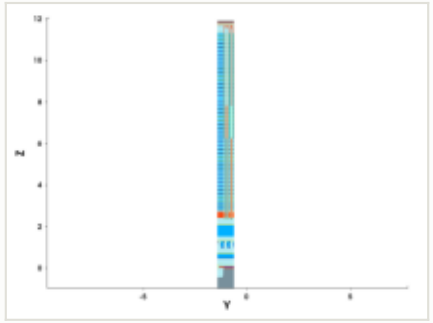


y cut at -1.035 µm

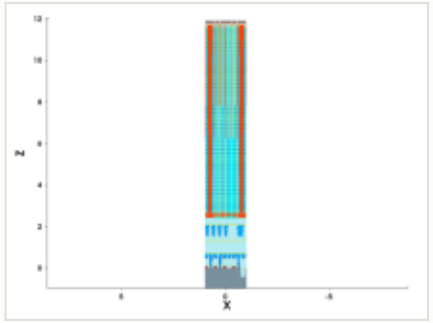


mask for this step

no mask for this step


steps by process area

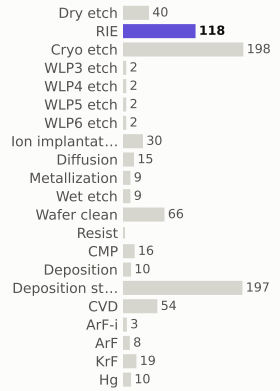

materials deposited (g)

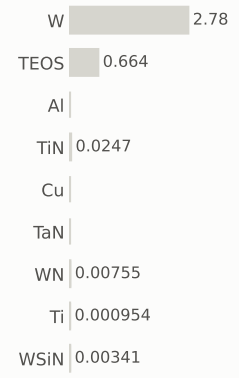

gases emitted (g)

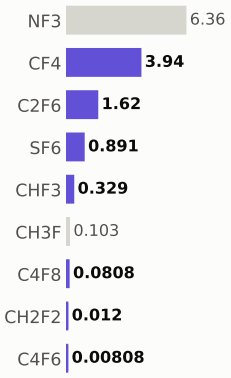

Step #8320: RIE

etch_anisotropic · RIE

1.04	712.5	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

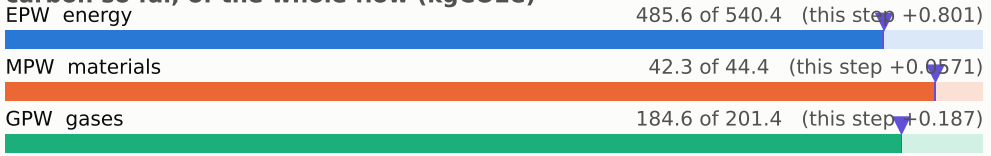


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

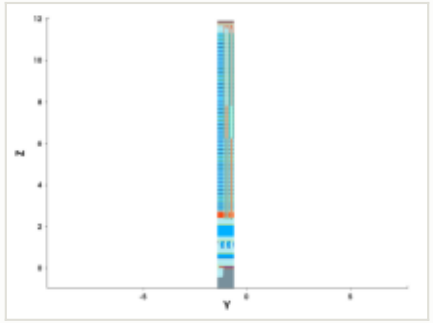


y cut at -1.035 µm

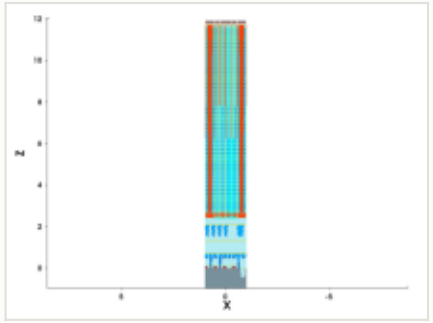


mask for this step

no mask for this step


steps by process area

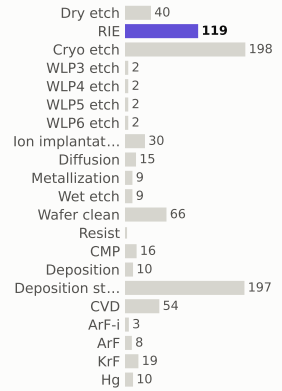

materials deposited (g)

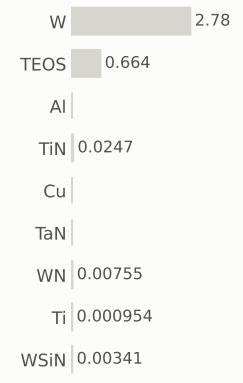

gases emitted (g)

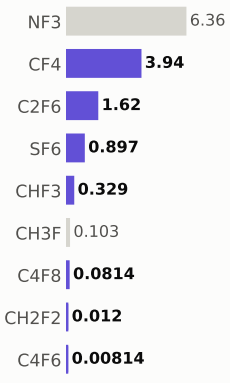

Step #8330: Dry_etch

etch_strip · Dry_etch

0.801	713.3	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

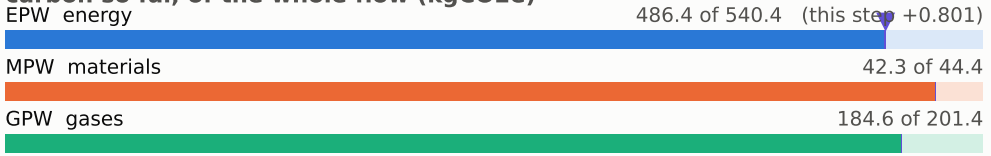


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

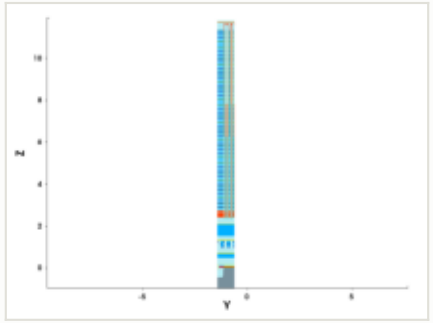


y cut at -1.035 µm

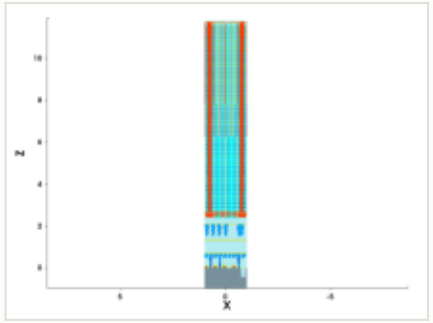


mask for this step

no mask for this step


steps by process area

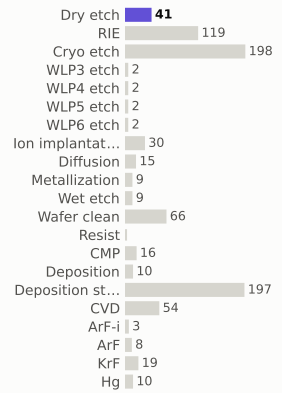

materials deposited (g)

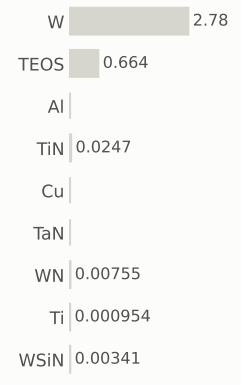

gases emitted (g)



Step #8340: Wafer_clean

clean · Wafer_clean

0.169	713.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

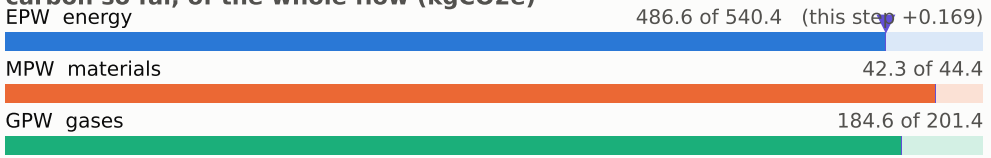


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

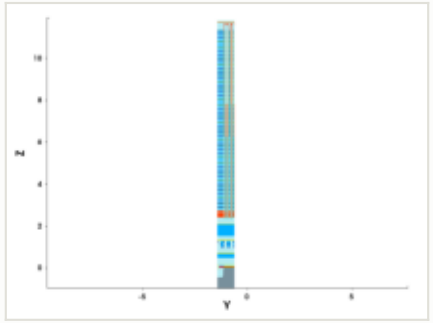


y cut at -1.035 µm

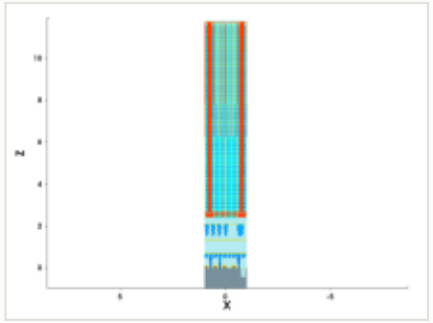


mask for this step

no mask for this step


steps by process area

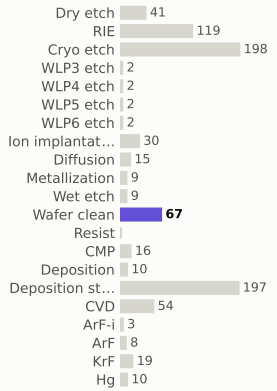

materials deposited (g)

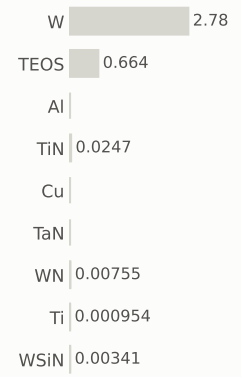

gases emitted (g)



Step #8350: CVD

depo_ellipsoidal · CVD

1.31	714.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	TiN
thickness	0.009 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0319 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

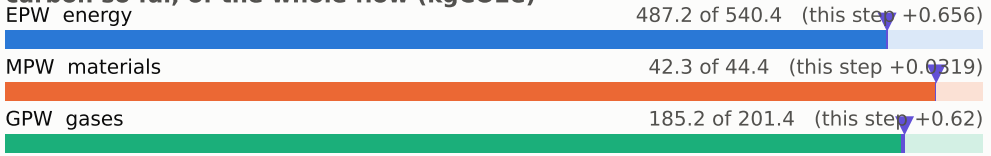


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

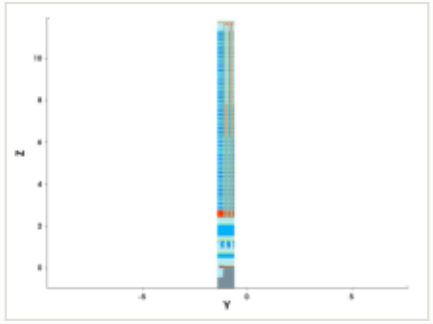


y cut at -1.035 µm

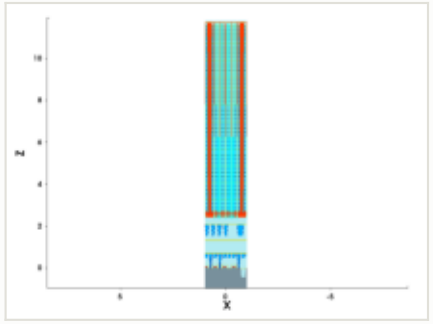


mask for this step

no mask for this step


steps by process area

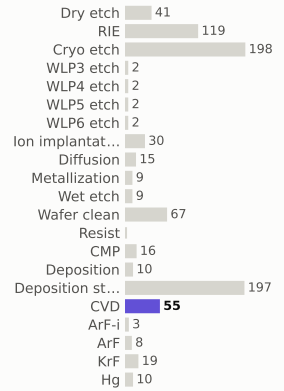

materials deposited (g)

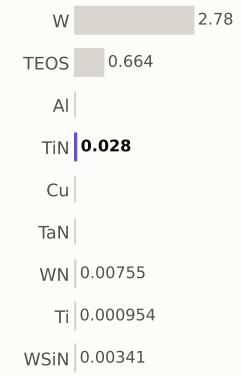

gases emitted (g)



Step #8360: Metallization

depo_isotropic · Metallization

1.21	716.0	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

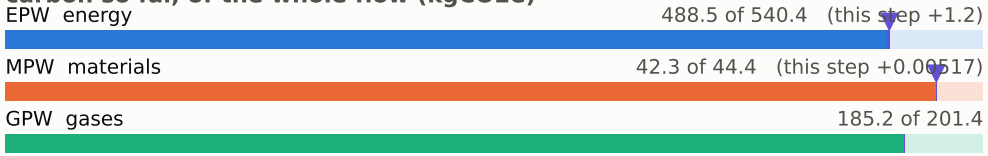


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

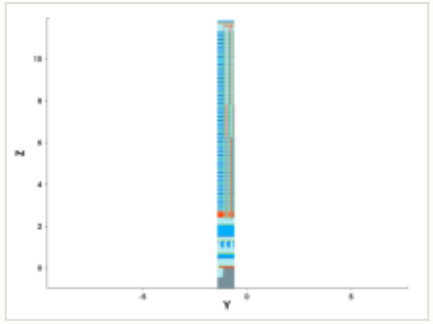


y cut at -1.035 µm

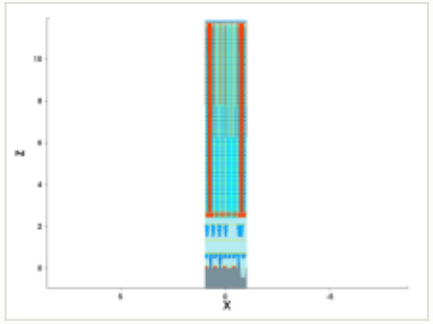


mask for this step

no mask for this step


steps by process area

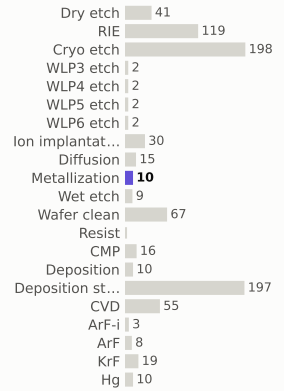

materials deposited (g)

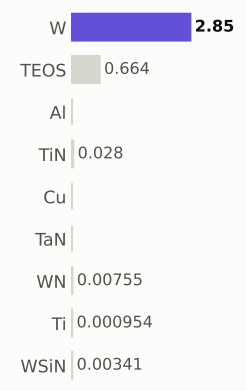

gases emitted (g)

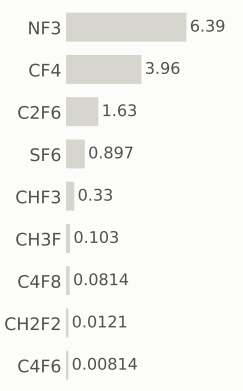

Step #8370: CMP

etch_cmp · CMP

0.169	716.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

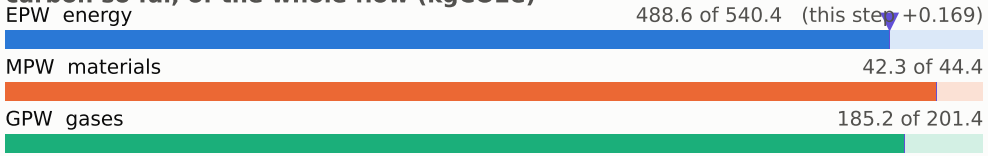


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

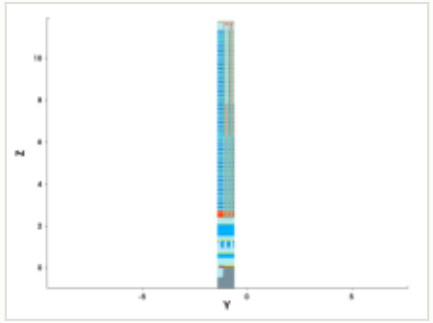


y cut at -1.035 µm

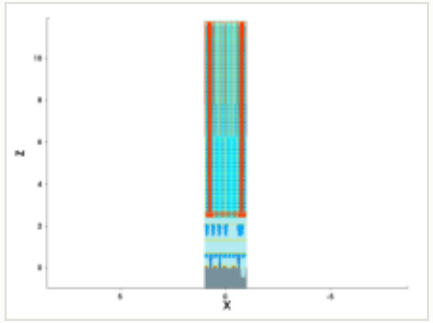


mask for this step

no mask for this step


steps by process area

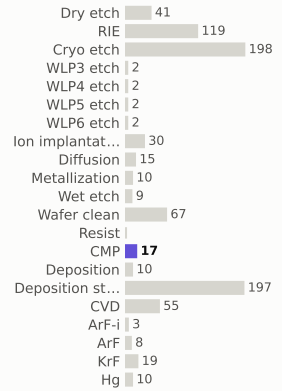

materials deposited (g)

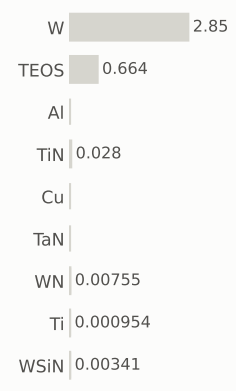

gases emitted (g)

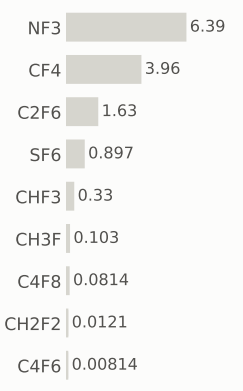

Step #8380: Wafer_clean

clean · Wafer_clean

0.169	716.3	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

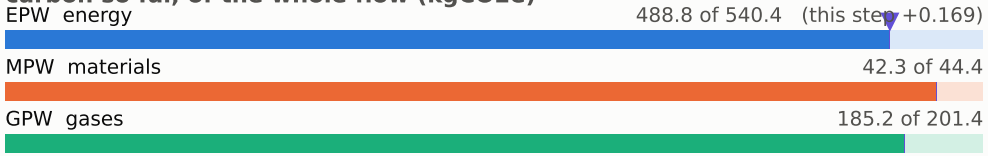


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

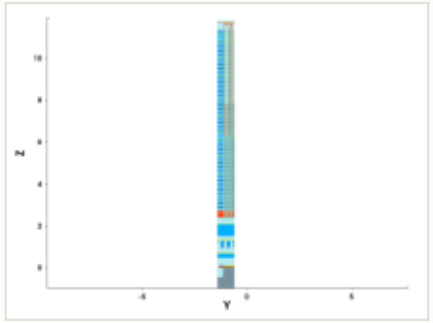


y cut at -1.035 µm

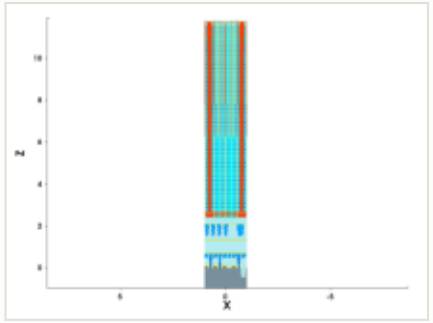


mask for this step

no mask for this step


steps by process area

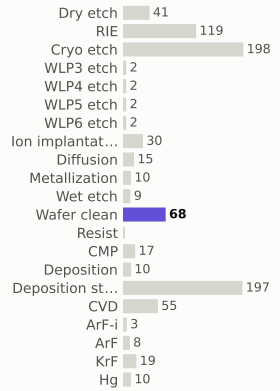

materials deposited (g)

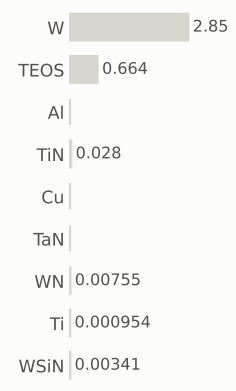

gases emitted (g)

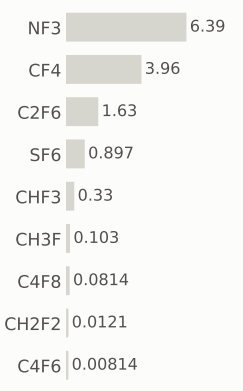

Step #8390: CVD

depo_isotropic · CVD

1.31	717.6	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.09 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

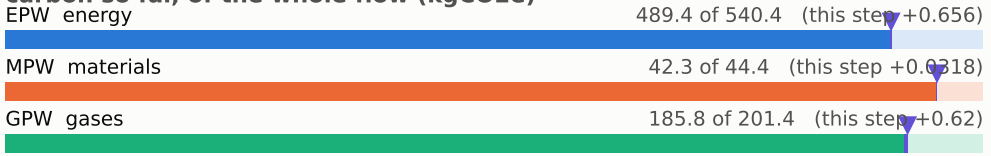


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

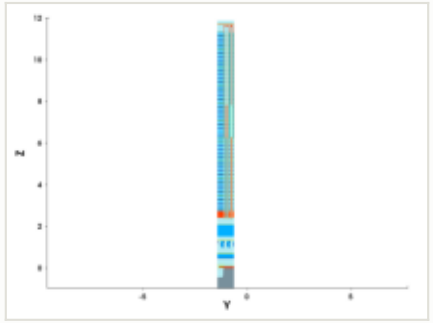


y cut at -1.035 µm

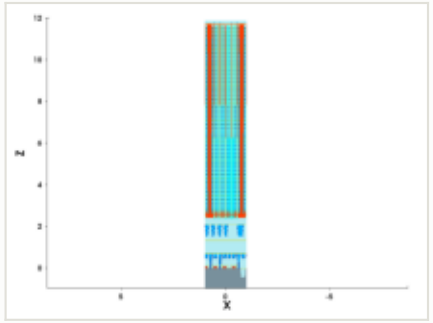


mask for this step

no mask for this step


steps by process area

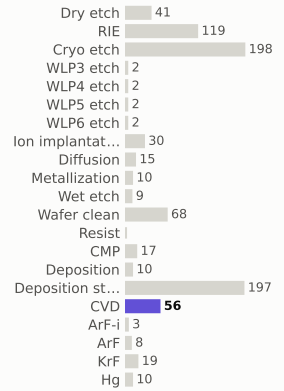

materials deposited (g)



gases emitted (g)

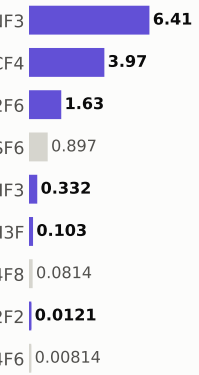

Step #8400: CVD

depo_isotropic · CVD

1.31	718.9	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.024 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

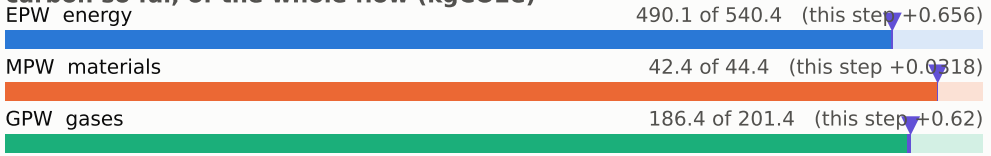


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

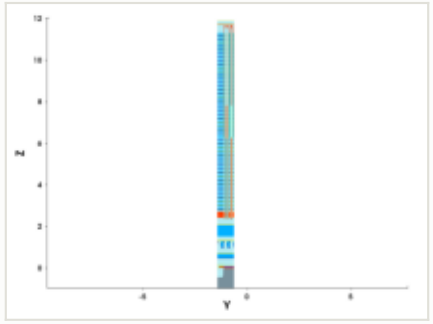


y cut at -1.035 µm

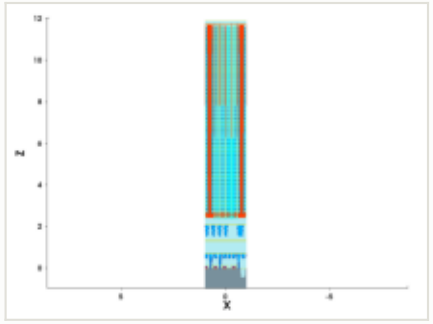

mask for this step

no mask for this step


steps by process area

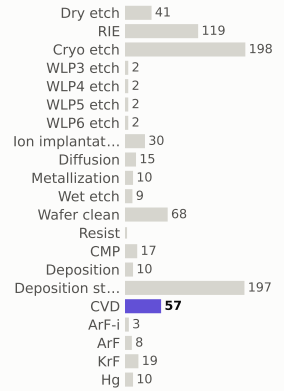

materials deposited (g)



gases emitted (g)



Step #8410: CVD

depo_isotropic · CVD

1.31	720.2	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

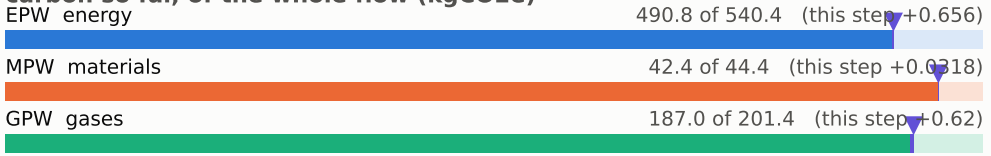


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

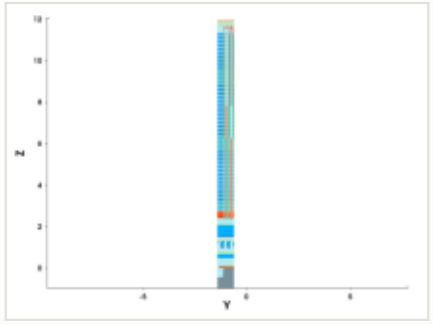


y cut at -1.035 µm

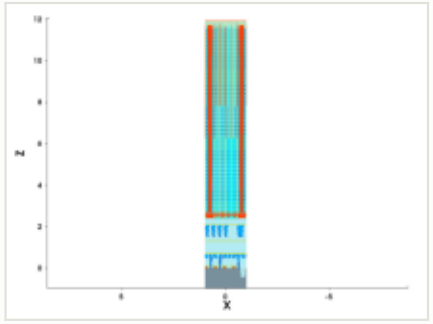


mask for this step

no mask for this step


steps by process area

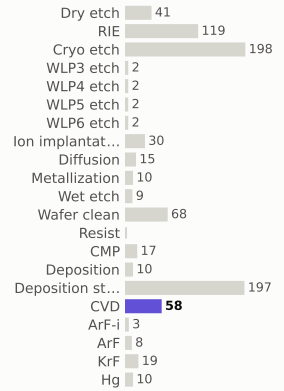

materials deposited (g)

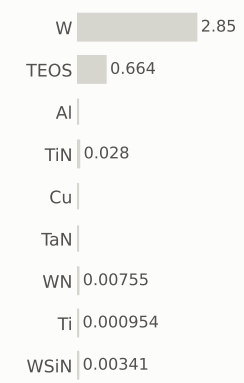

gases emitted (g)



Step #8420: Wafer_clean

clean · Wafer_clean

0.169	720.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

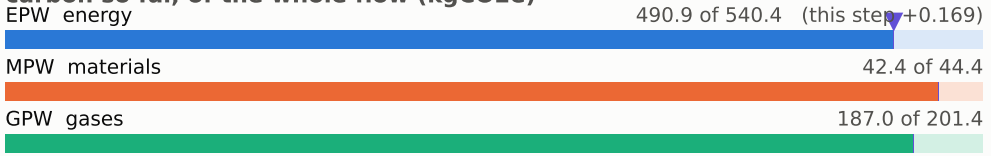


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

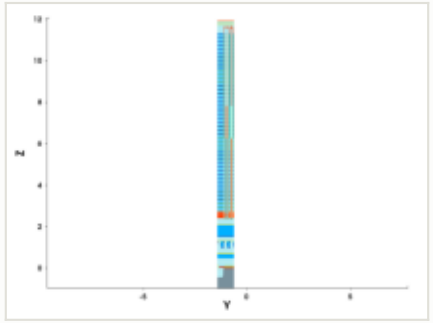


y cut at -1.035 µm

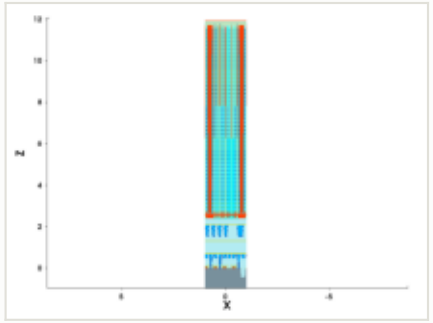


mask for this step

no mask for this step


steps by process area

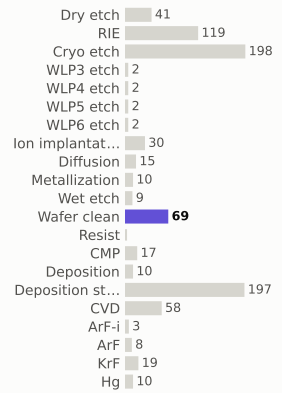

materials deposited (g)

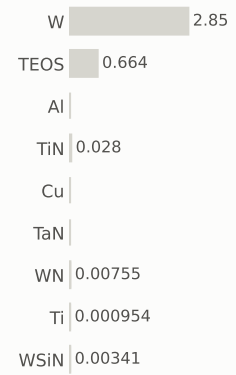

gases emitted (g)

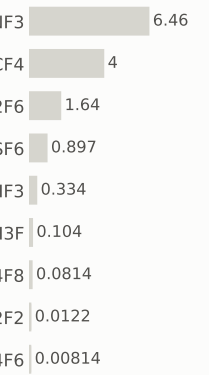

Step #8430: ArF-i

litho_patterning · ArF-i

0.217	720.6	0.028%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

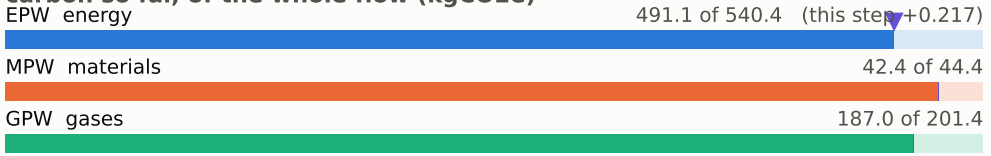


embodied carbon up to each step (kgCO2e per wafer)




x cut at 0.000 µm

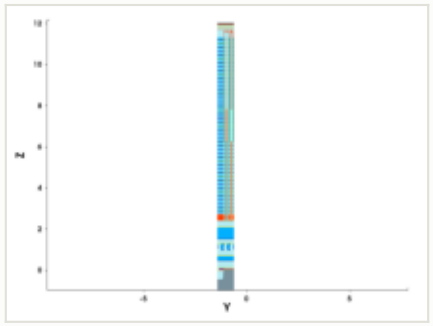


y cut at -1.035 µm

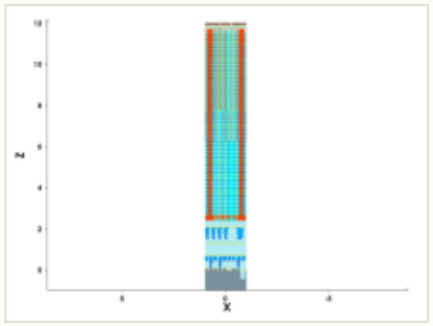


mask: layer 42:0 (OASIS)

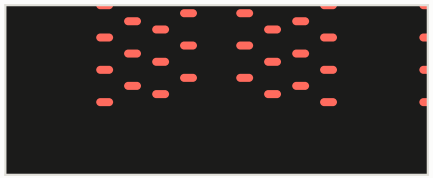


steps by process area

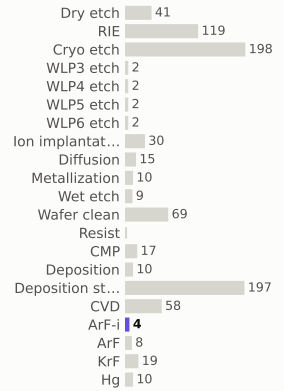

materials deposited (g)

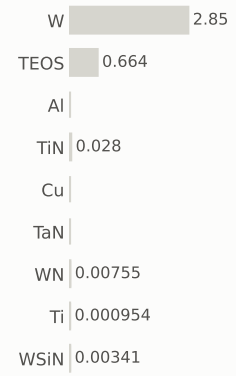

gases emitted (g)



Step #8440: RIE

etch_anisotropic · RIE

1.04	721.6	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

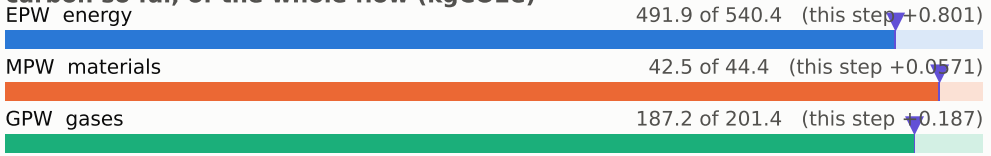


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

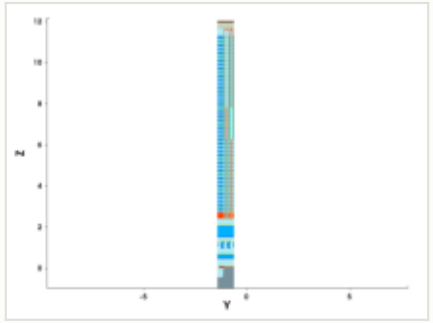


y cut at -1.035 µm

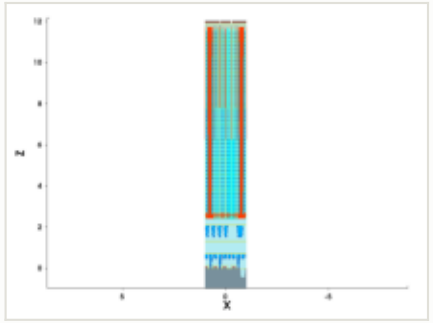


mask for this step

no mask for this step


steps by process area

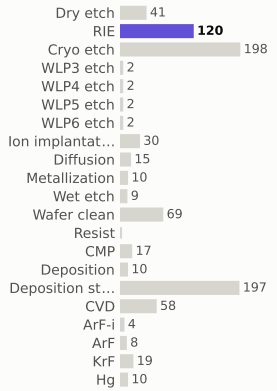

materials deposited (g)

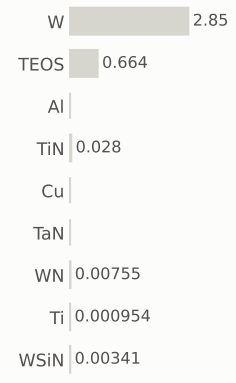

gases emitted (g)

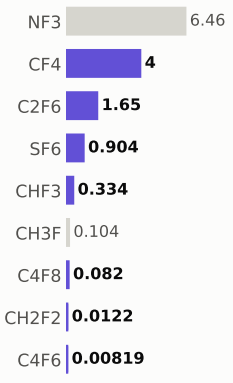

Step #8450: RIE

etch_anisotropic · RIE

1.04	722.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

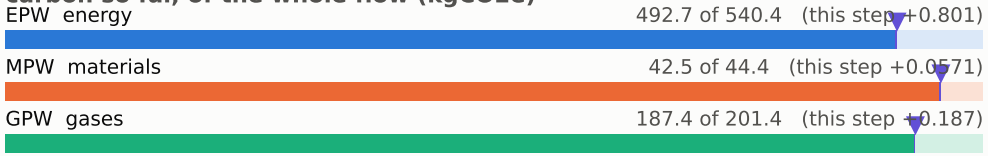


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

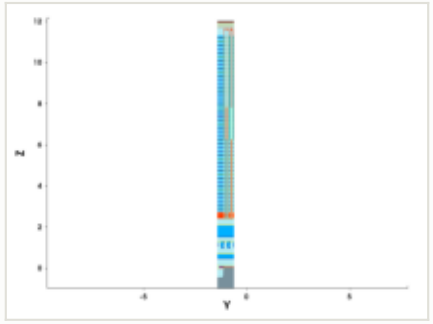


y cut at -1.035 µm

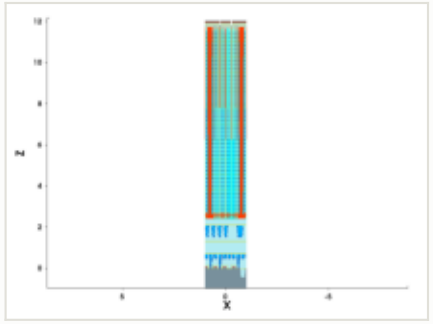


mask for this step

no mask for this step


steps by process area

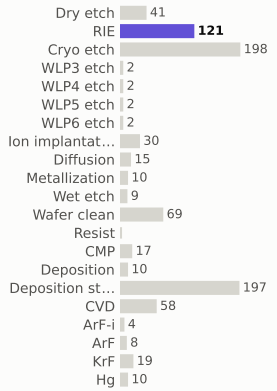

materials deposited (g)

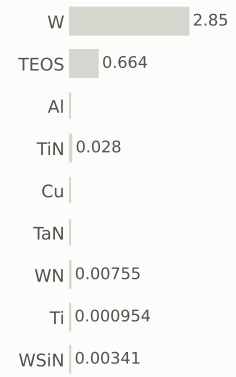

gases emitted (g)



Step #8460: RIE

etch_isotropic · RIE

1.04	723.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

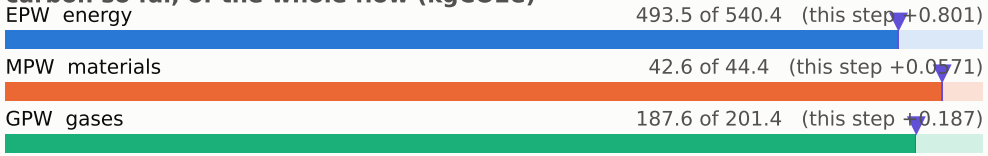


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

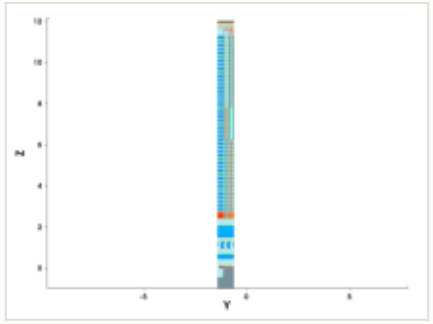


y cut at -1.035 µm

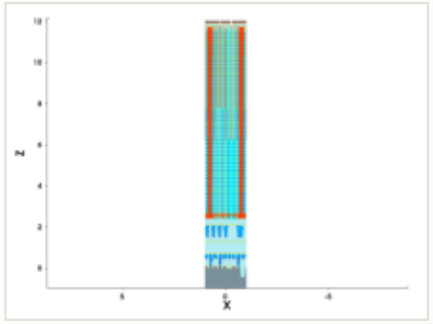

mask for this step

no mask for this step


steps by process area

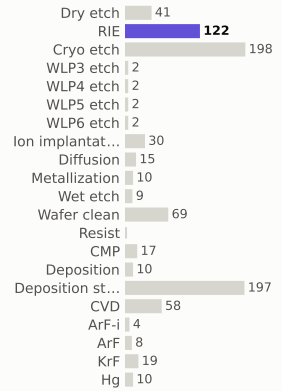

materials deposited (g)



gases emitted (g)



Step #8470: Dry_etch

etch_strip · Dry_etch

0.801	724.5	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

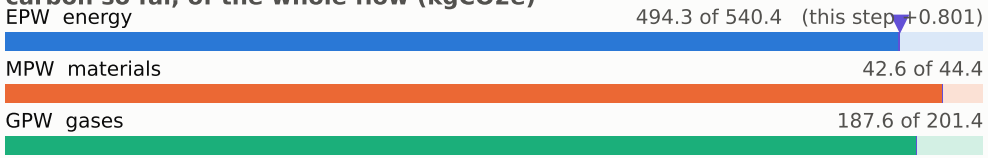


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

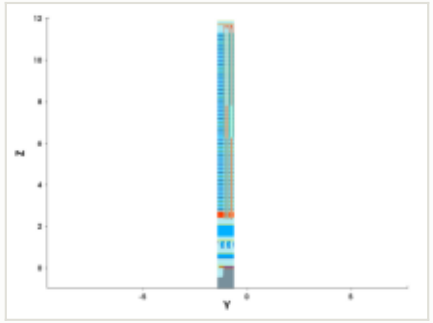


y cut at -1.035 µm

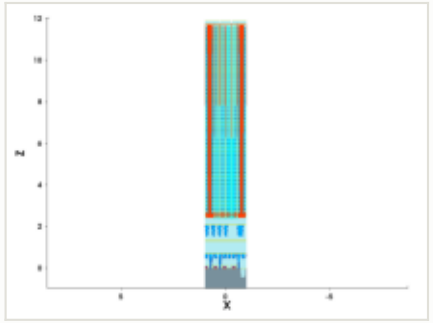


mask for this step

no mask for this step


steps by process area

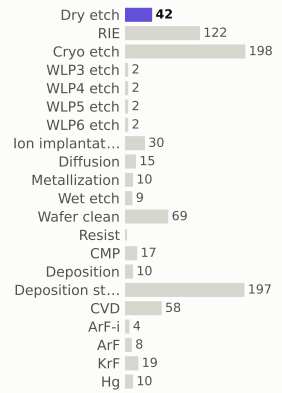

materials deposited (g)

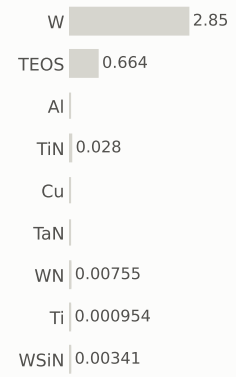

gases emitted (g)

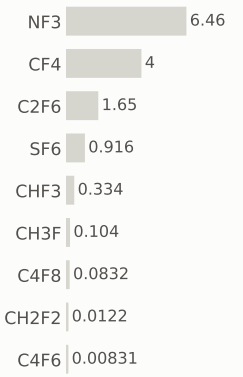

Step #8480: Wafer_clean

clean · Wafer_clean

0.169	724.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

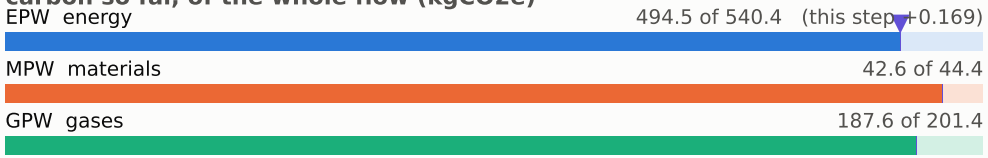


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

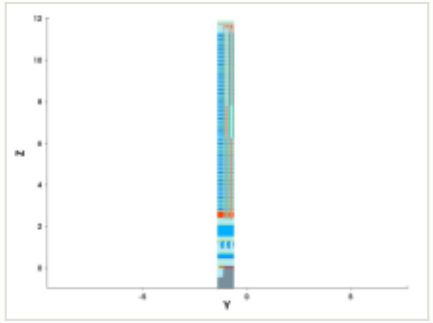


y cut at -1.035 µm

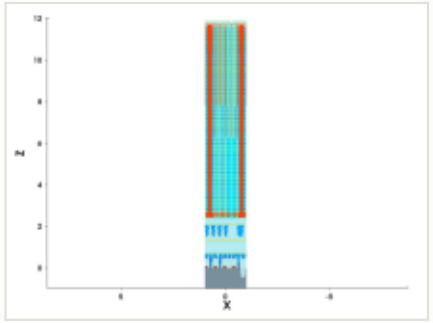


mask for this step

no mask for this step


steps by process area

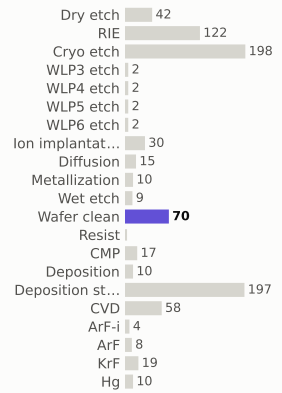

materials deposited (g)

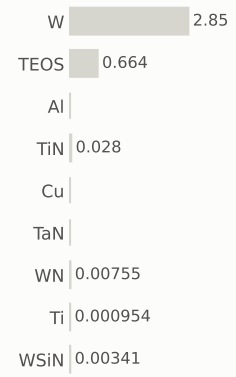

gases emitted (g)

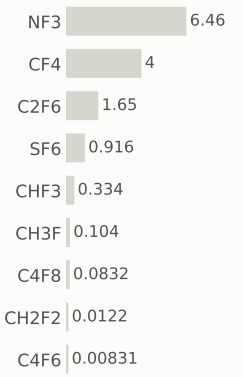

Step #8490: CVD

depo_ellipsoidal · CVD

1.31	726.0	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CVD
material	TiN
thickness	0.005 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

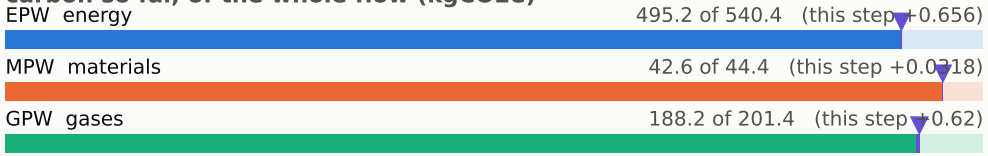


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

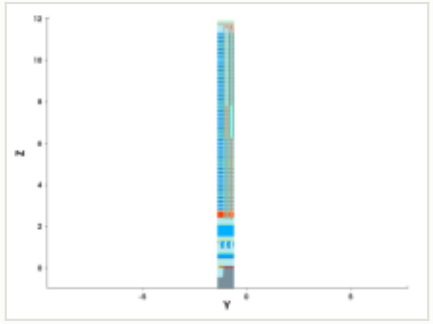


y cut at -1.035 µm

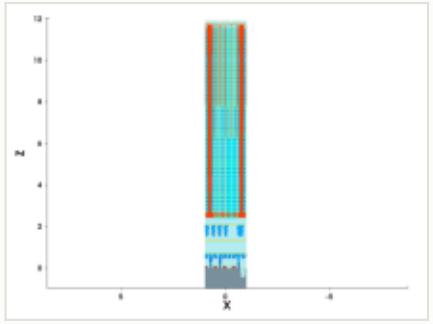


mask for this step

no mask for this step


steps by process area

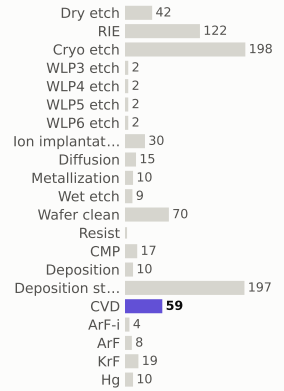

materials deposited (g)

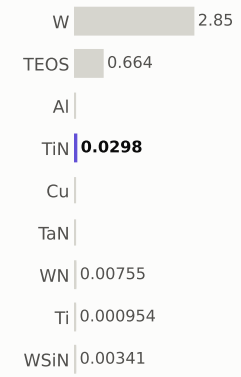

gases emitted (g)



Step #8500: Metallization

depo_isotropic · Metallization

1.22	727.2	0.16%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Metallization
material	W
thickness	0.15 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0155 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.22 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

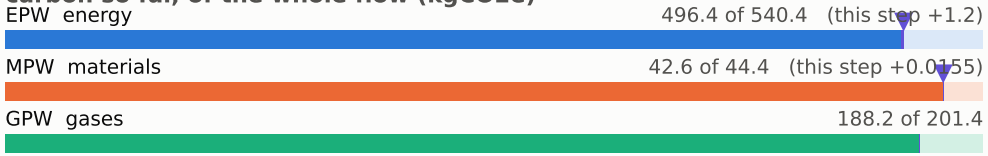


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

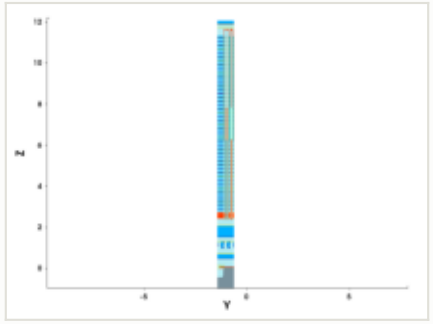


y cut at -1.035 µm

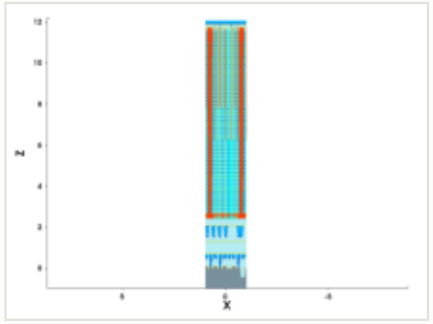


mask for this step

no mask for this step


steps by process area

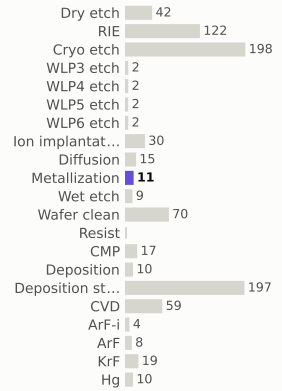

materials deposited (g)

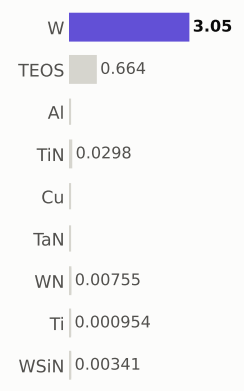

gases emitted (g)

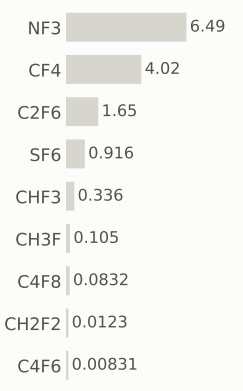

Step #8510: CMP

etch_cmp · CMP

0.169	727.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

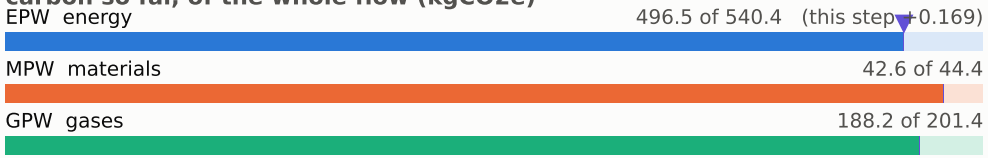


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

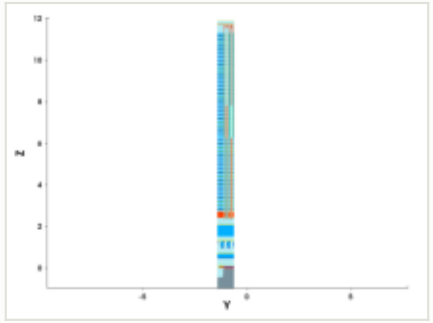


y cut at -1.035 µm

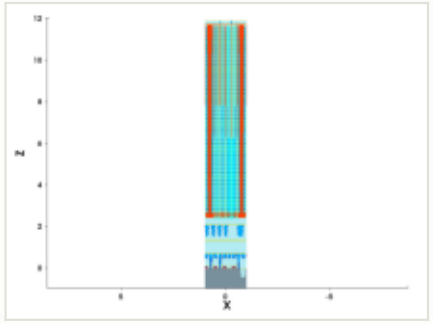


mask for this step

no mask for this step


steps by process area

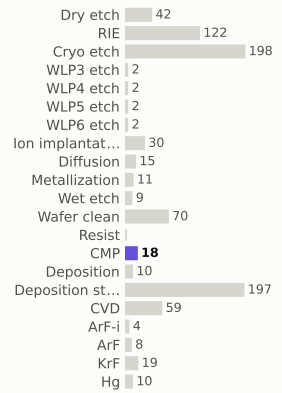

materials deposited (g)

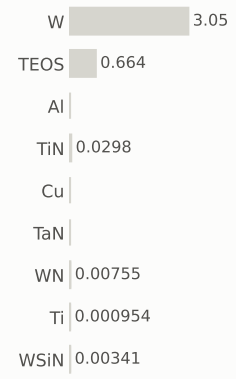

gases emitted (g)



Step #8520: RIE

etch_anisotropic · RIE

1.04	728.4	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

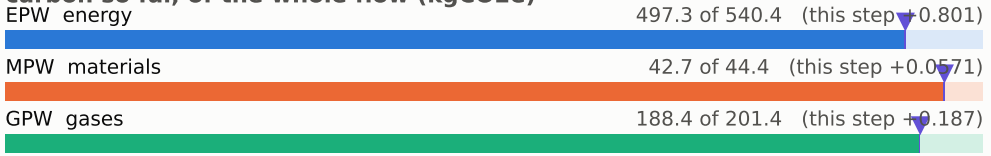


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

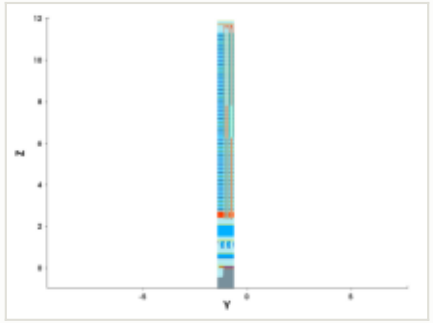


y cut at -1.035 µm

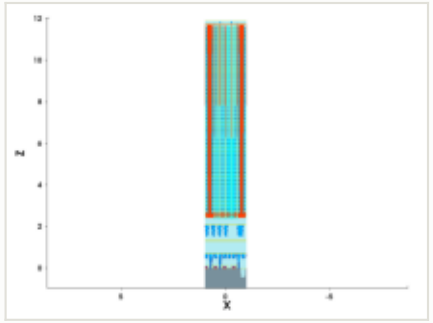


mask for this step

no mask for this step


steps by process area

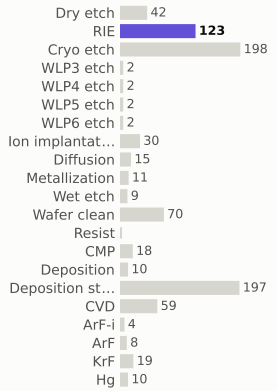

materials deposited (g)

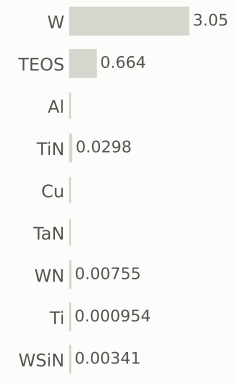

gases emitted (g)

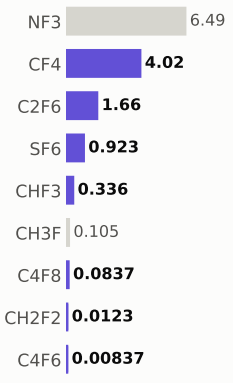

Step #8530: CVD

depo_isotropic · CVD

1.31	729.8	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.05 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

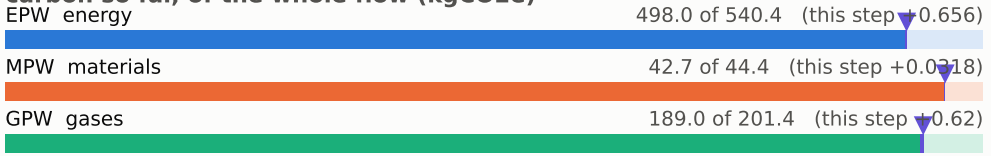


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

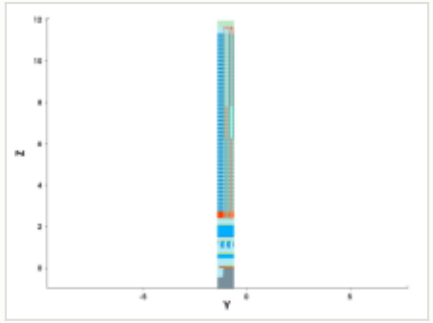


y cut at -1.035 µm

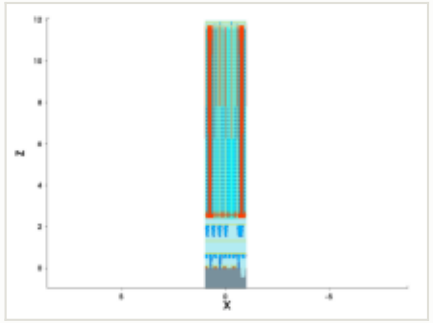


mask for this step

no mask for this step


steps by process area

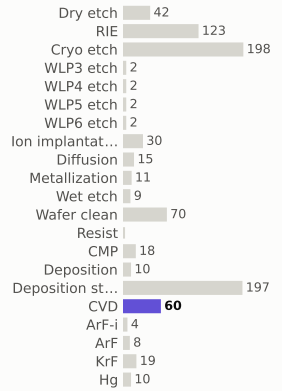

materials deposited (g)

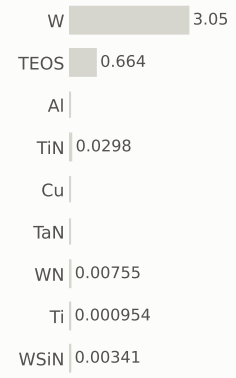

gases emitted (g)

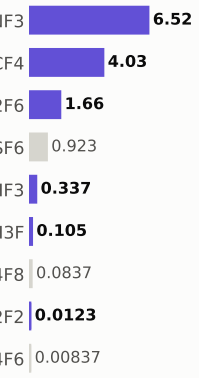

Step #8540: CMP

etch_cmp · CMP

0.169	729.9	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

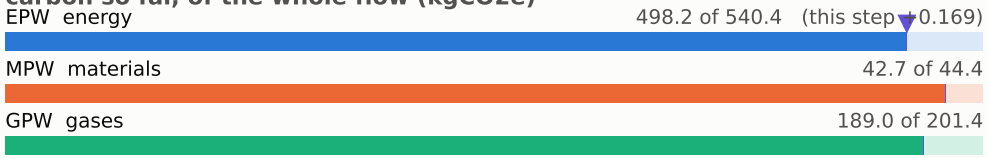


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

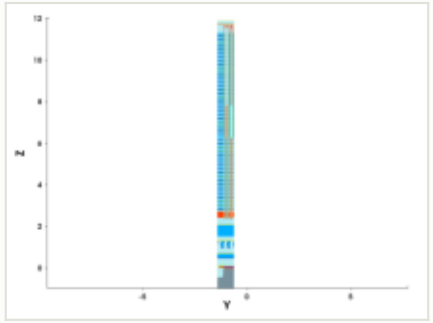


y cut at -1.035 µm

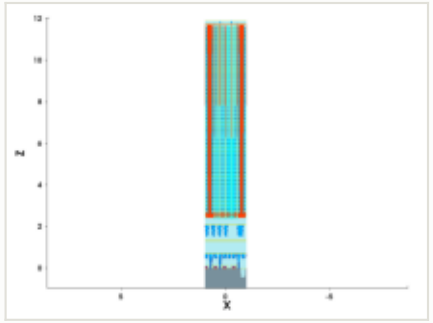


mask for this step

no mask for this step


steps by process area

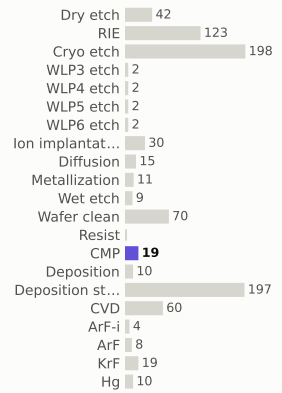

materials deposited (g)

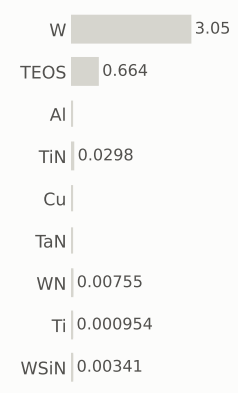

gases emitted (g)



Step #8550: Wafer_clean

clean · Wafer_clean

0.169	730.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

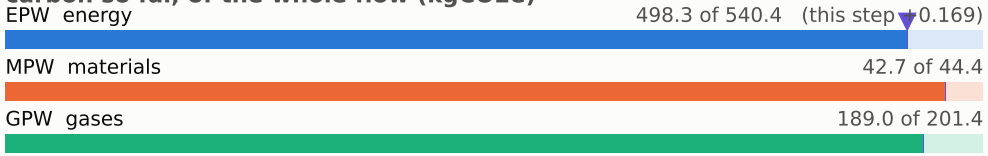


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

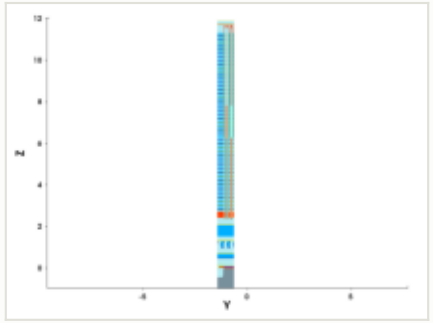


y cut at -1.035 µm

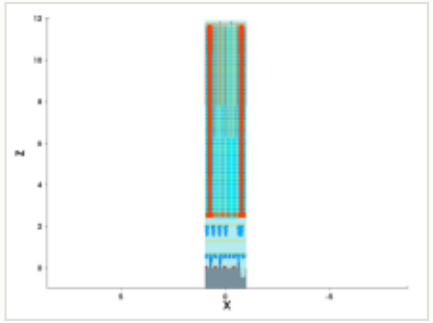


mask for this step

no mask for this step


steps by process area

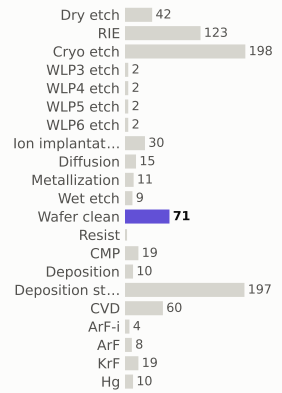

materials deposited (g)

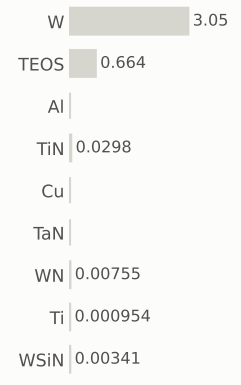

gases emitted (g)



Step #8560: CVD

depo_isotropic · CVD

1.31	731.4	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.04 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

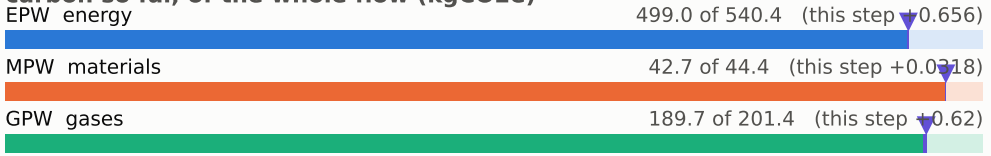


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

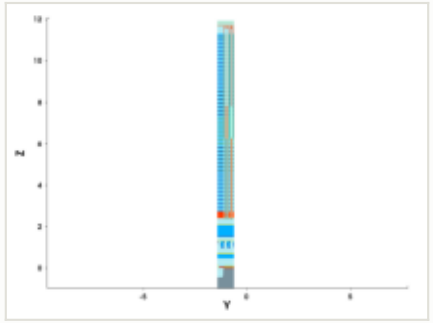


y cut at -1.035 µm

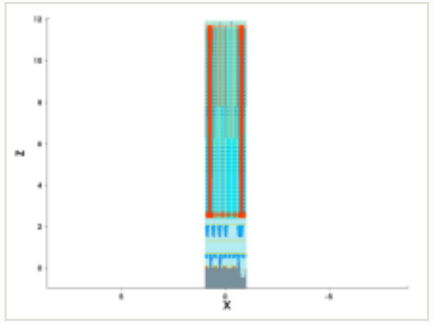


mask for this step

no mask for this step


steps by process area

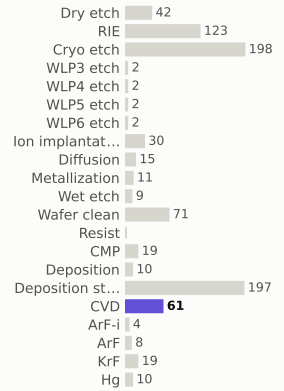

materials deposited (g)



gases emitted (g)



Step #8580: CVD

depo_isotropic · CVD

1.31	732.7	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CVD
material	—
thickness	0.1 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

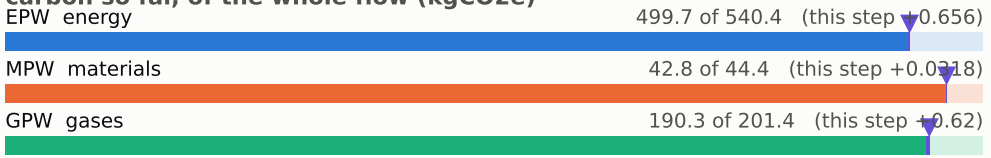


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

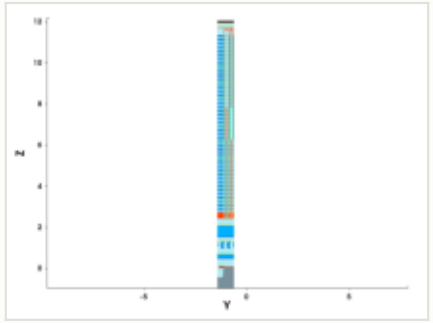


y cut at -1.035 µm

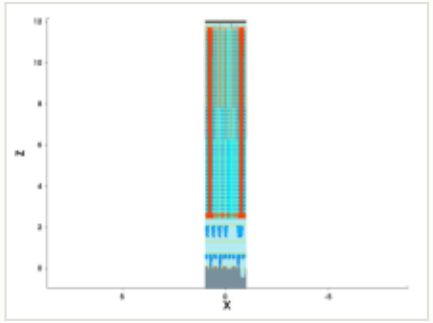


mask for this step

no mask for this step


steps by process area

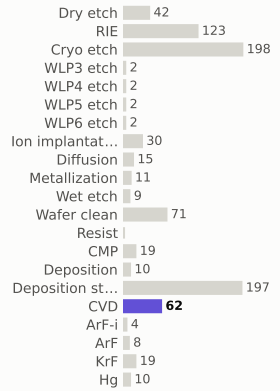

materials deposited (g)

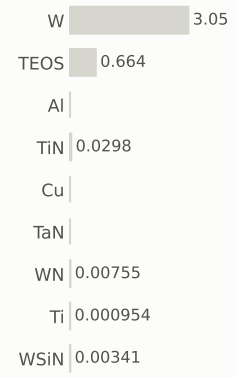

gases emitted (g)



Step #8590: CVD


depo_isotropic · CVD

1.31	734.0	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



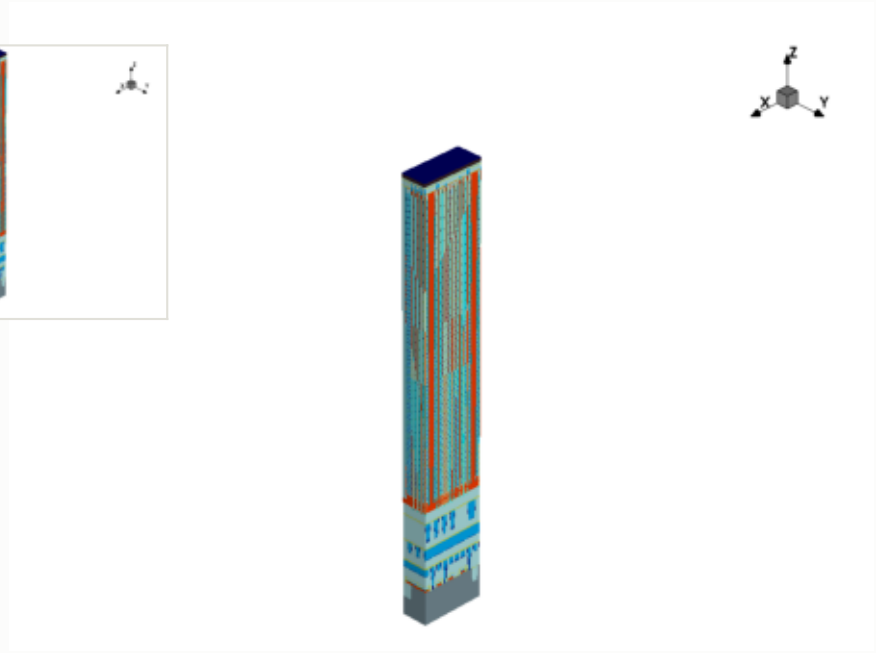


this step


process area	CVD
material	TiN
thickness	0.02 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0321 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

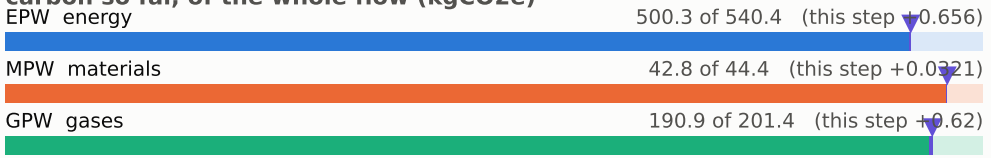


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

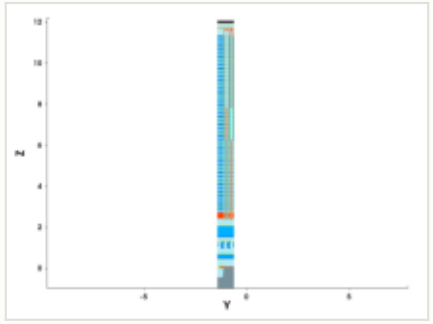


y cut at -1.035 µm

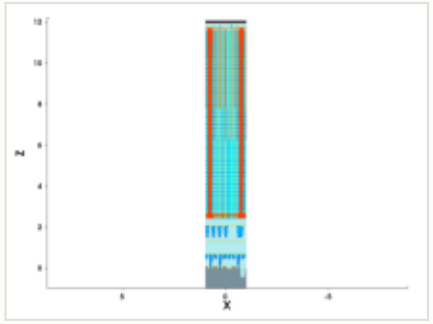


mask for this step

no mask for this step


steps by process area

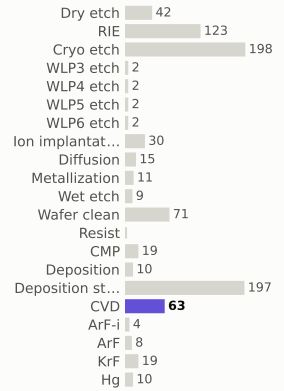

materials deposited (g)

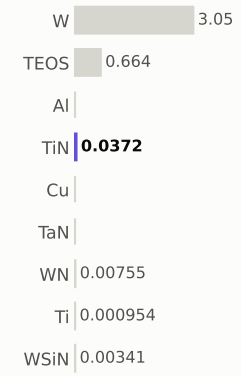

gases emitted (g)



Step #8600: CVD

depo_isotropic · CVD

1.31	735.3	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	CVD
material	—
thickness	0.02 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

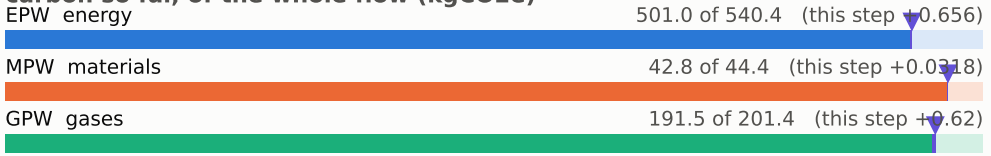


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

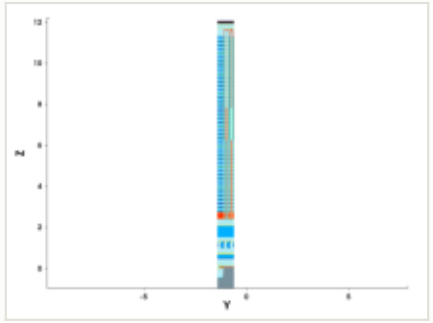


y cut at -1.035 µm

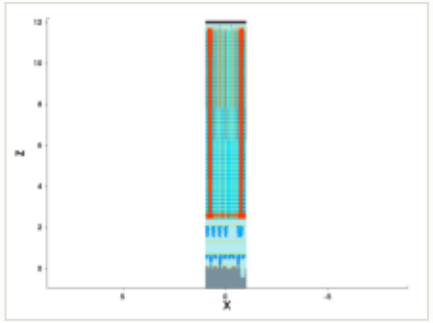


mask for this step

no mask for this step


steps by process area

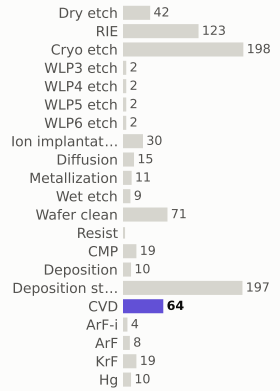

materials deposited (g)

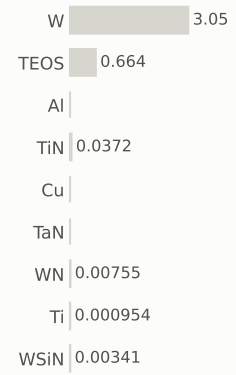

gases emitted (g)

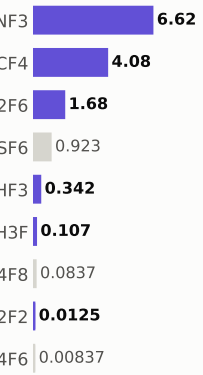

Step #8610: CVD


depo_isotropic · CVD

1.31	736.6	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



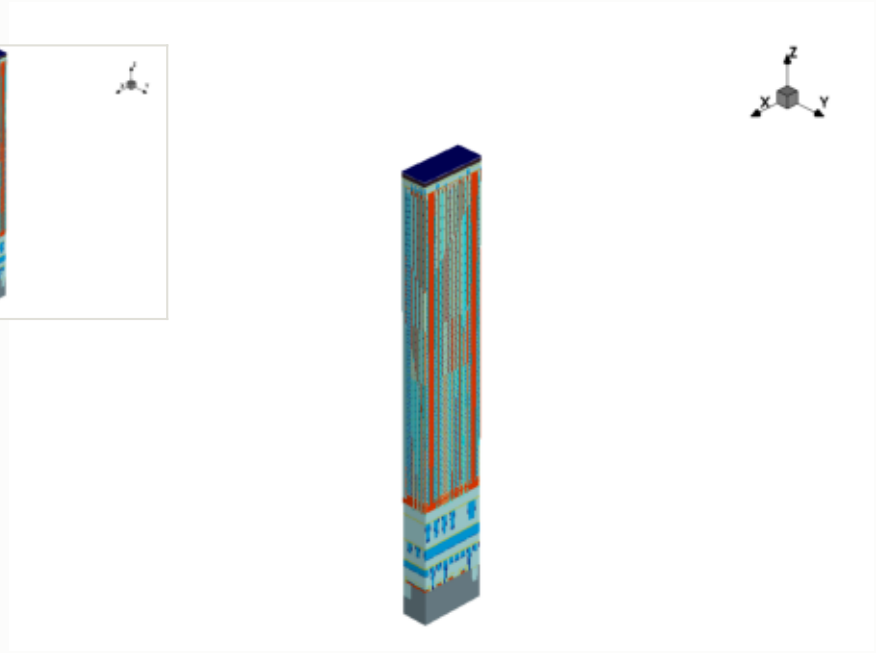


this step


process area	CVD
material	TiN
thickness	0.02 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0321 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

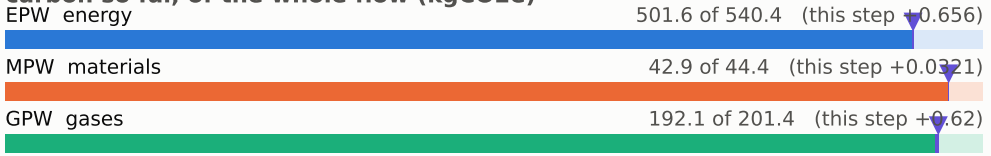


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

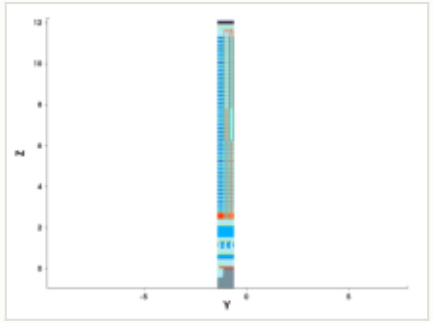


y cut at -1.035 µm

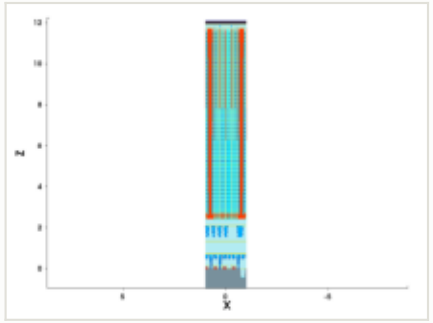


mask for this step

no mask for this step


steps by process area

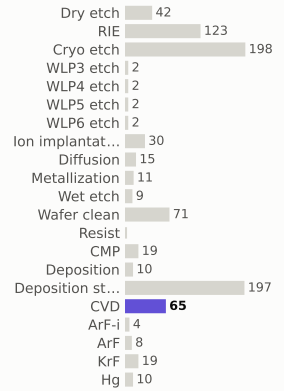

materials deposited (g)

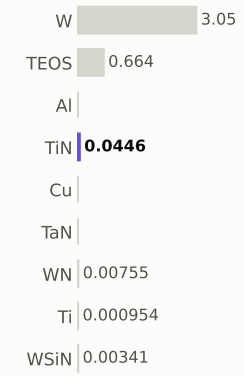

gases emitted (g)

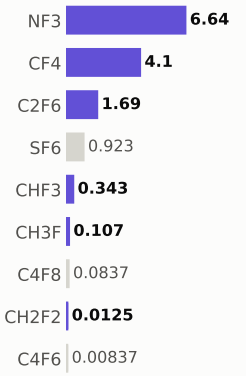

Step #8620: CVD

depo_isotropic · CVD

1.31	737.9	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.07 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

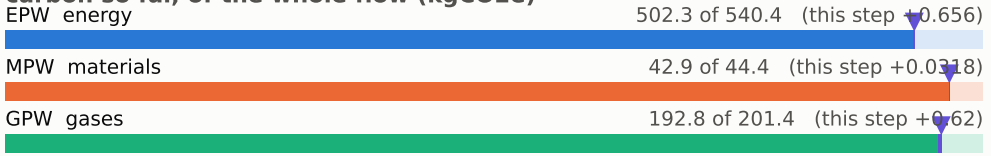


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

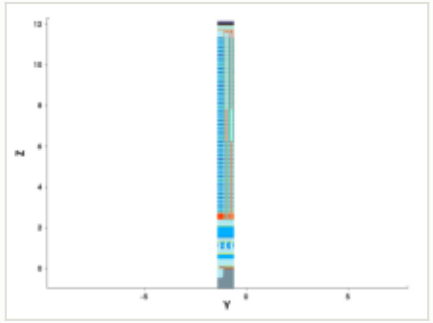


y cut at -1.035 µm

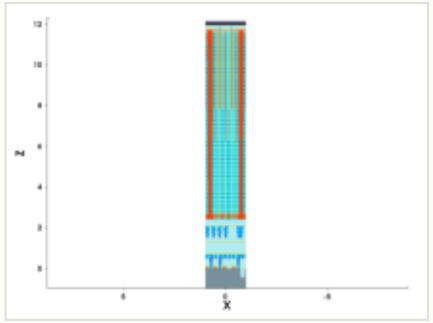


mask for this step

no mask for this step


steps by process area

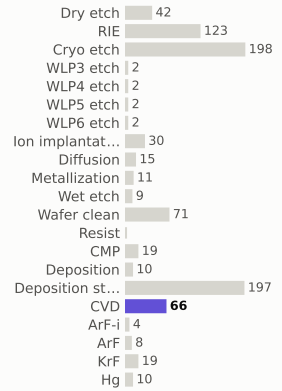

materials deposited (g)

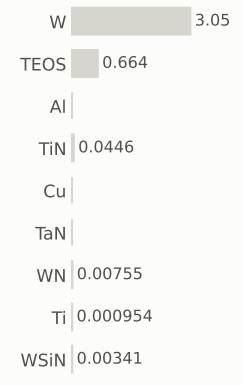

gases emitted (g)



Step #8630: CVD

depo_isotropic · CVD

1.31	739.2	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

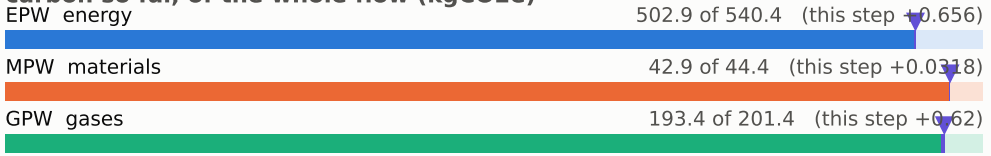


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

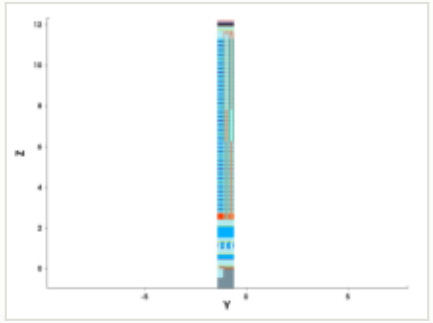


y cut at -1.035 µm

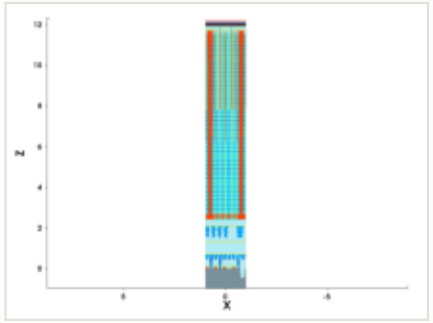


mask for this step

no mask for this step


steps by process area

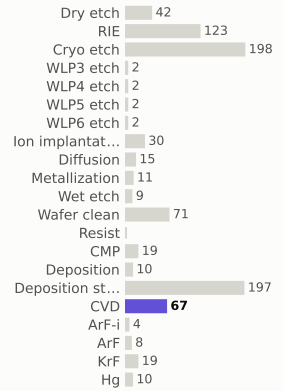

materials deposited (g)

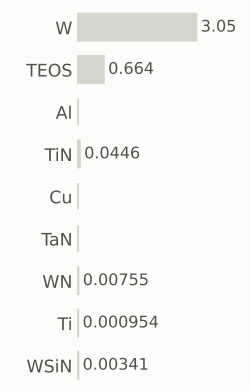

gases emitted (g)



Step #8640: Wafer_clean


clean · Wafer_clean

0.169	739.4	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

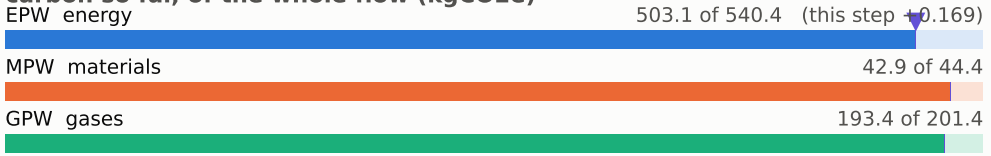


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

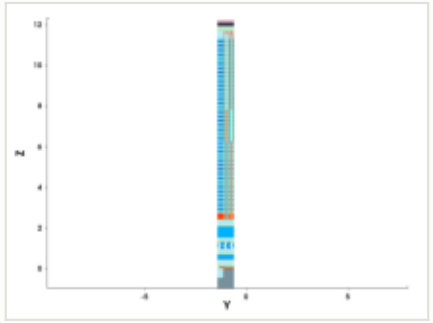


y cut at -1.035 µm

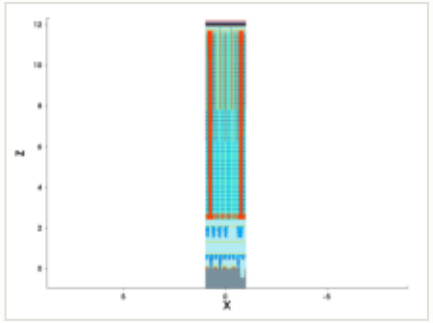


mask for this step

no mask for this step


steps by process area

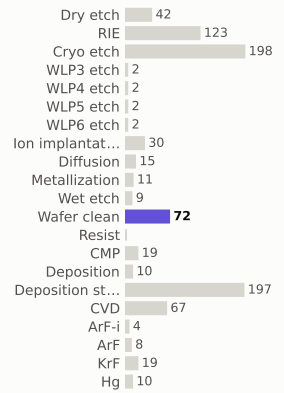

materials deposited (g)

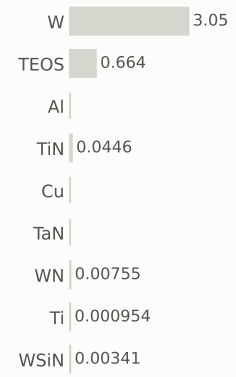

gases emitted (g)



Step #8650: ArF-i

litho_patterning · ArF-i

0.217	739.6	0.028%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

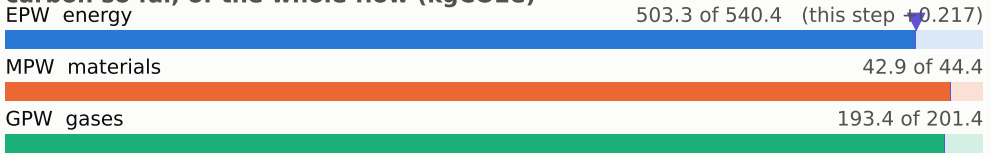


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

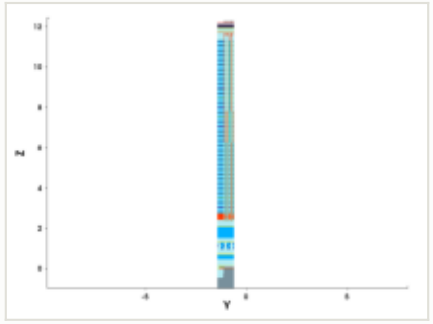


y cut at -1.035 µm

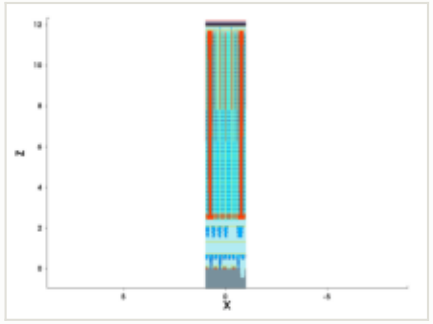


mask: layer 43:0, positive (OASIS)




steps by process area

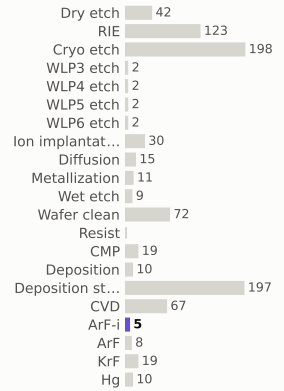

materials deposited (g)

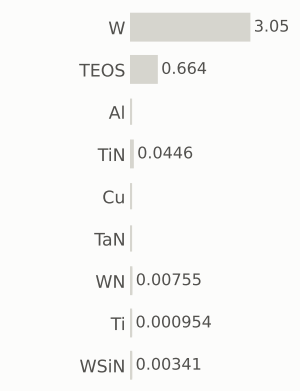

gases emitted (g)

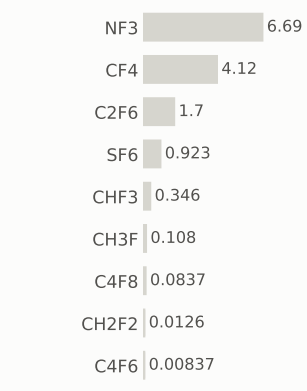

Step #8660: RIE

etch_isotropic · RIE

1.04	740.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

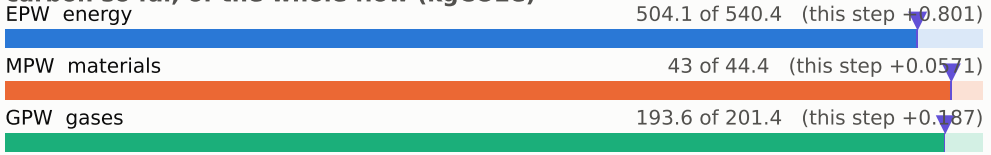


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

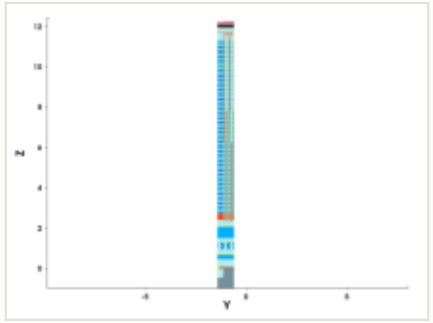


y cut at -1.035 µm

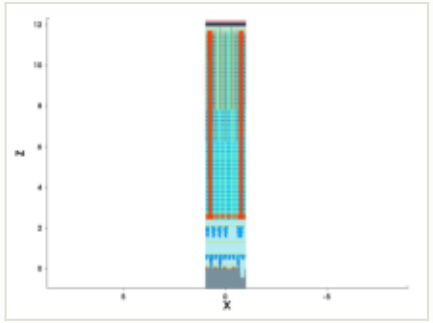


mask for this step

no mask for this step


steps by process area

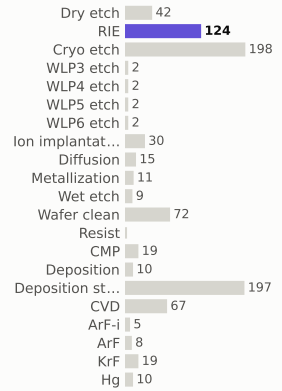

materials deposited (g)



gases emitted (g)



Step #8670: RIE

etch_anisotropic · RIE

1.04	741.7	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

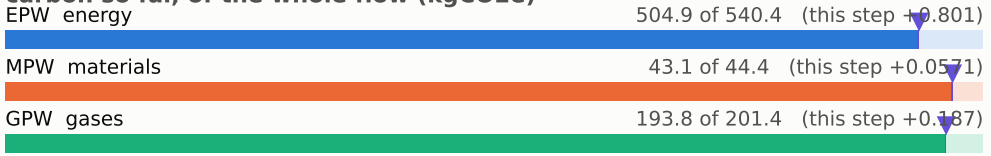


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

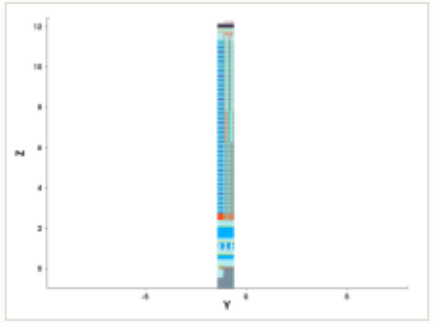


y cut at -1.035 µm

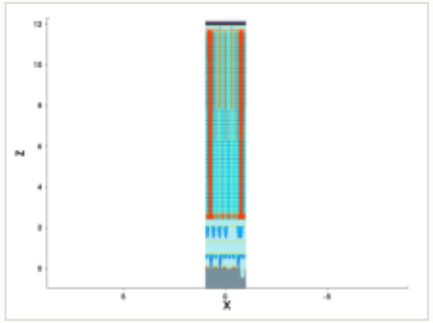


mask for this step

no mask for this step


steps by process area

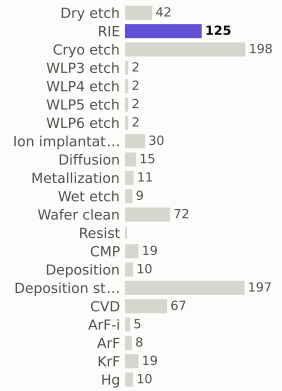

materials deposited (g)

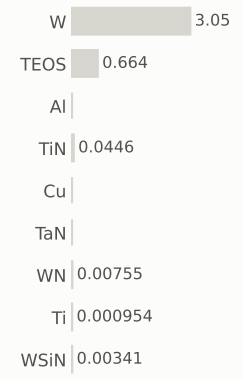

gases emitted (g)



Step #8680: RIE

etch_anisotropic · RIE

1.04	742.8	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

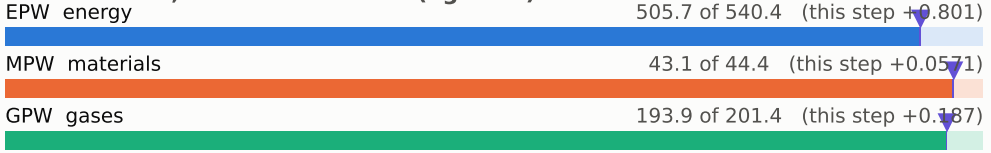


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

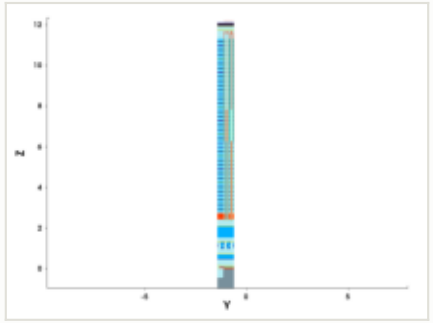


y cut at -1.035 µm

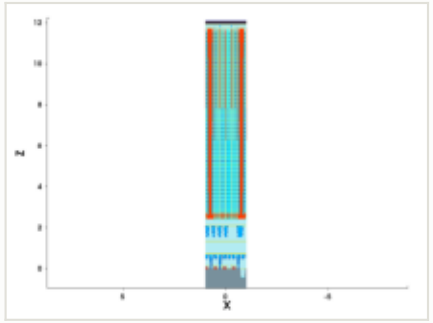


mask for this step

no mask for this step


steps by process area

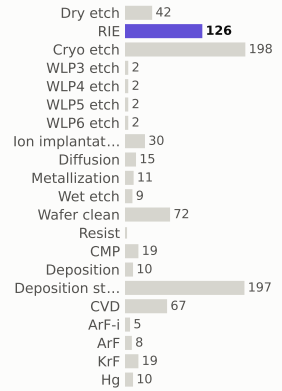

materials deposited (g)

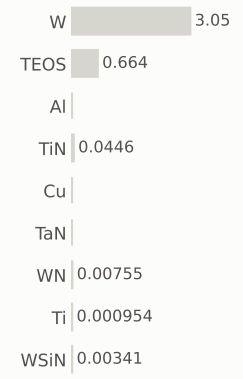

gases emitted (g)



Step #8690: Dry_etch

etch_strip · Dry_etch

0.801	743.6	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

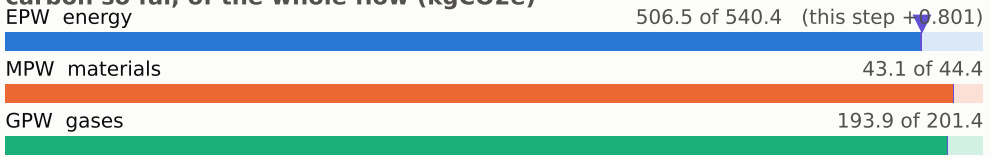


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

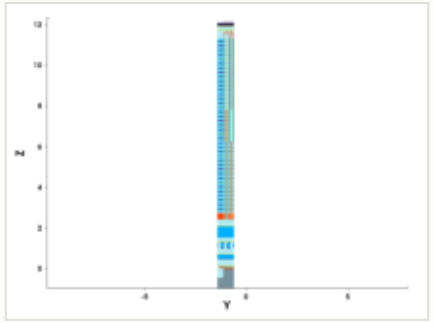


y cut at -1.035 µm

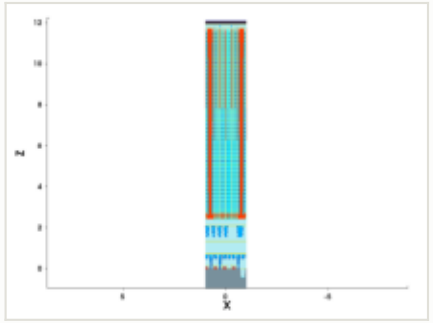


mask for this step

no mask for this step


steps by process area

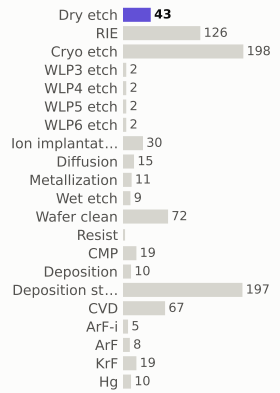

materials deposited (g)

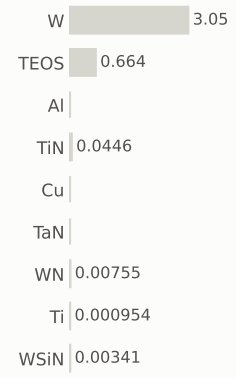

gases emitted (g)



Step #8700: CVD

depo_isotropic · CVD

1.31	744.9	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.016 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

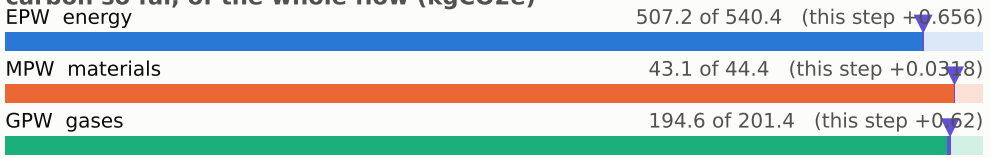


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

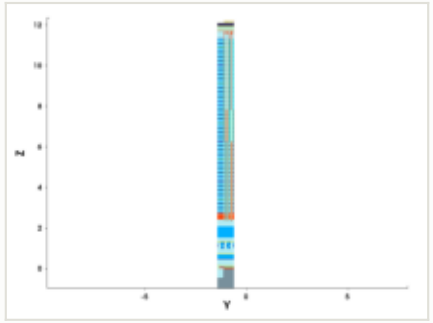


y cut at -1.035 µm

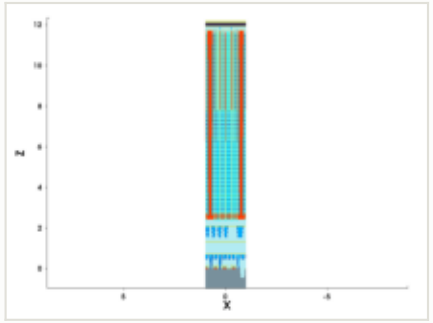


mask for this step

no mask for this step


steps by process area

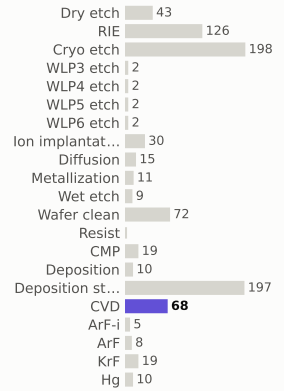

materials deposited (g)

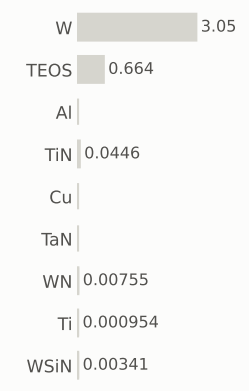

gases emitted (g)



Step #8710: RIE

etch_anisotropic · RIE

1.04	745.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

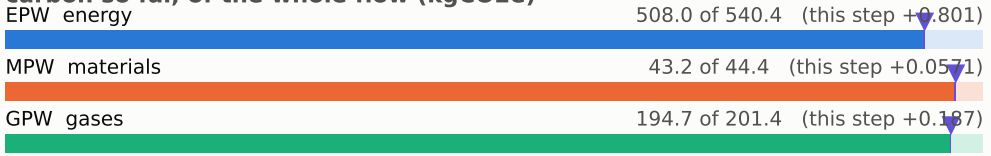


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

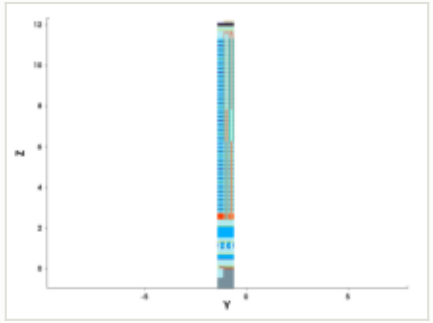


y cut at -1.035 µm

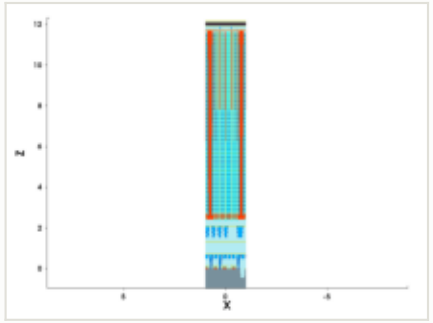


mask for this step

no mask for this step


steps by process area

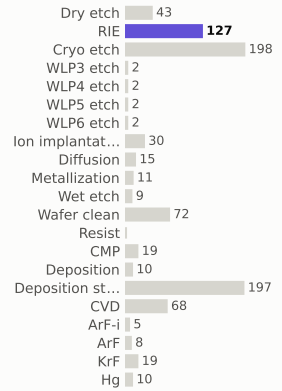

materials deposited (g)

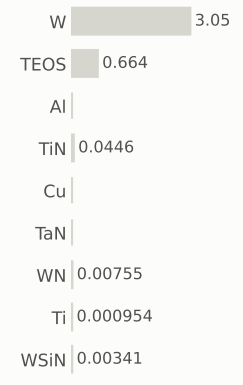

gases emitted (g)



Step #8720: RIE

etch_anisotropic · RIE

1.04	747.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

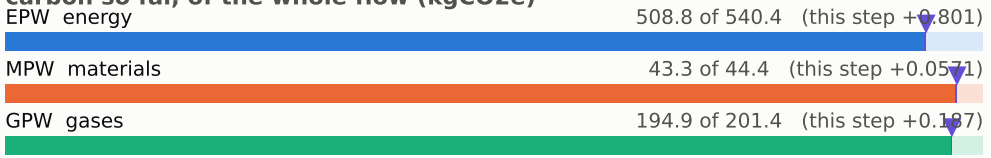


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

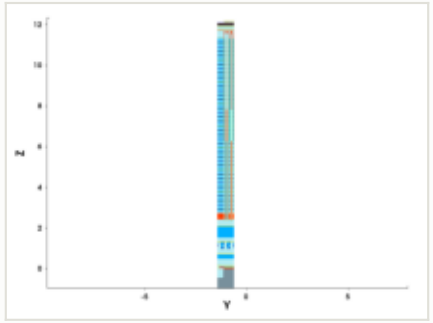


y cut at -1.035 µm

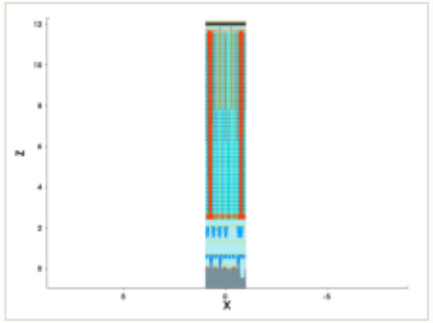


mask for this step

no mask for this step


steps by process area

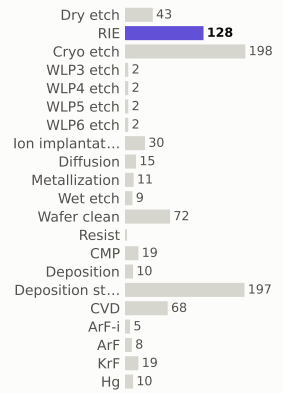

materials deposited (g)

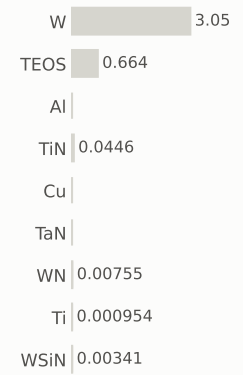

gases emitted (g)



Step #8730: RIE

etch_anisotropic · RIE

1.04	748.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

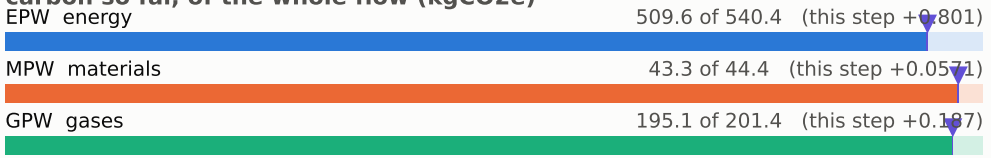


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

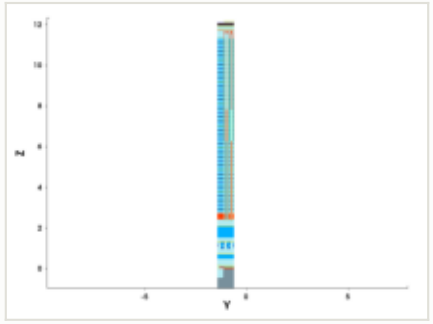


y cut at -1.035 µm

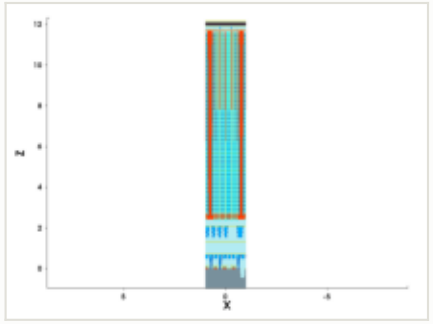


mask for this step

no mask for this step


steps by process area

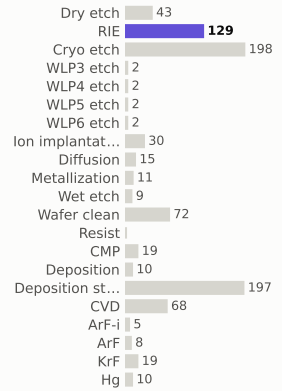

materials deposited (g)

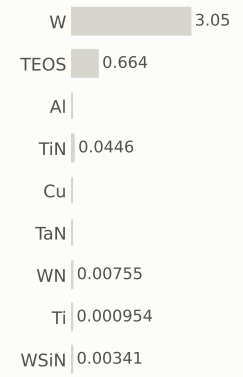

gases emitted (g)

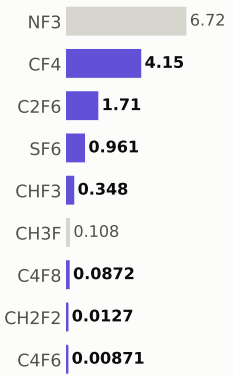

Step #8740: Resist

depo_sog · Resist

0.169	748.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Resist
material	—
thickness	0.15 µm
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

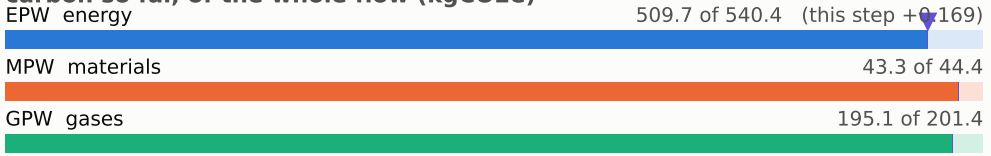


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

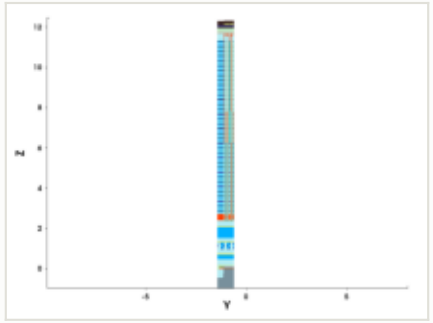


y cut at -1.035 µm

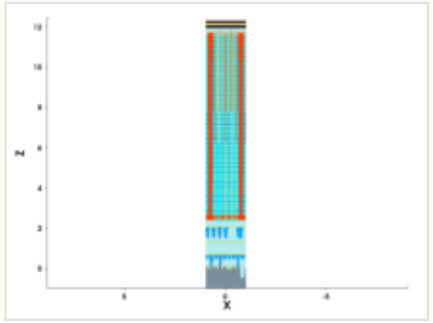


mask for this step

no mask for this step


steps by process area

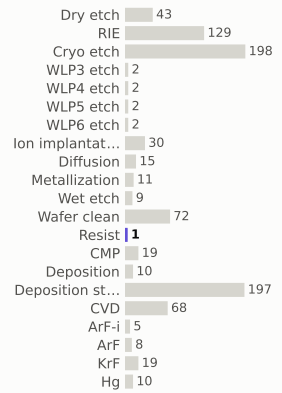

materials deposited (g)

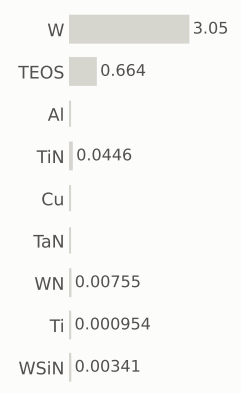

gases emitted (g)



Step #8750: CVD


depo_isotropic · CVD

1.31	749.5	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



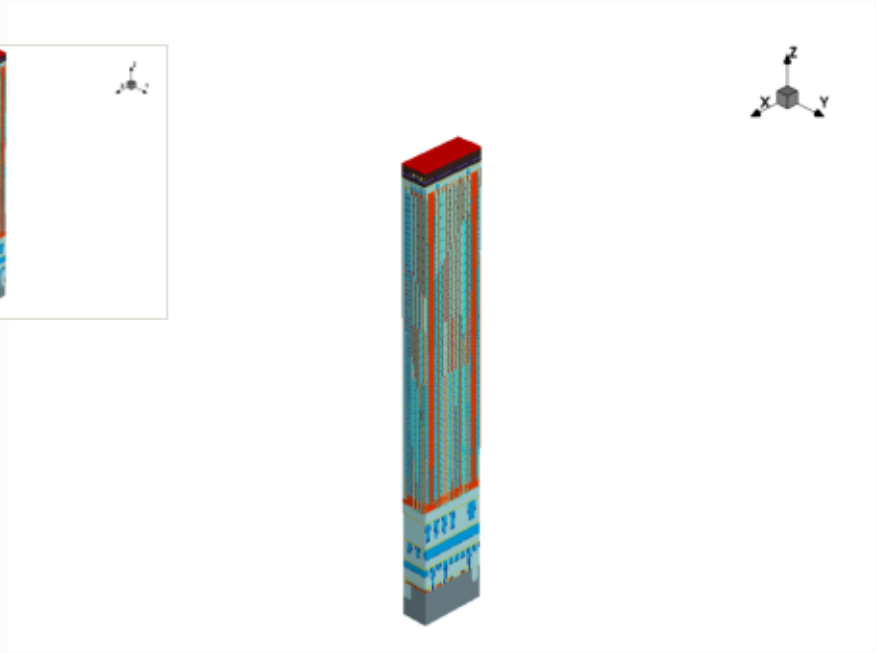


this step


process area	CVD
material	—
thickness	0.03 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

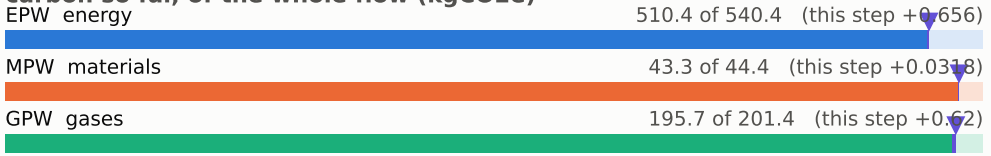


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

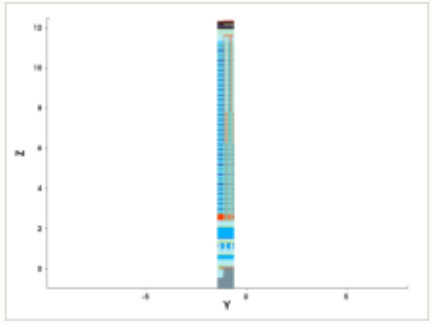


y cut at -1.035 µm

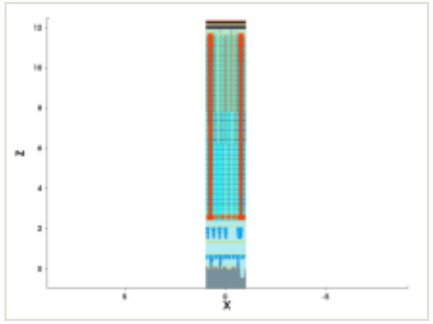


mask for this step

no mask for this step


steps by process area

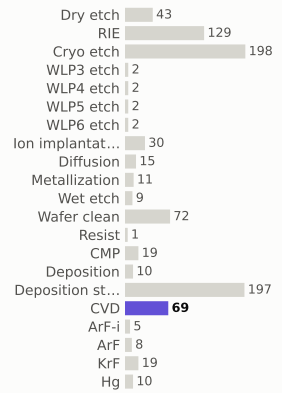

materials deposited (g)

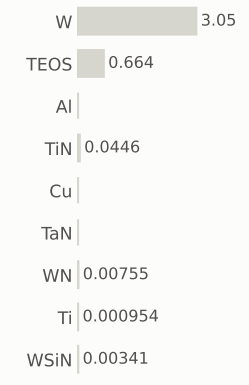

gases emitted (g)



Step #8760: Wafer_clean


clean · Wafer_clean

0.169	749.7	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



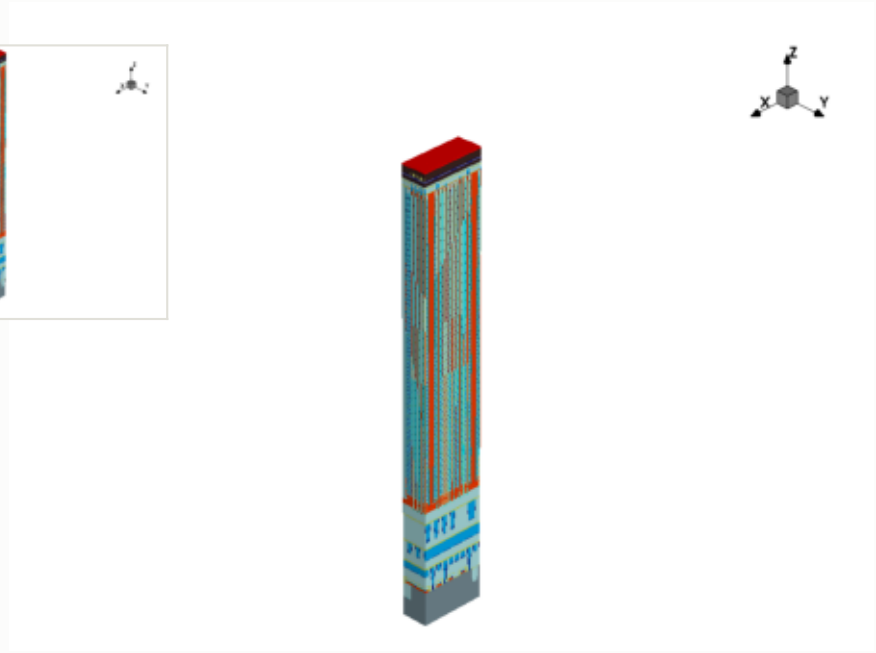


this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

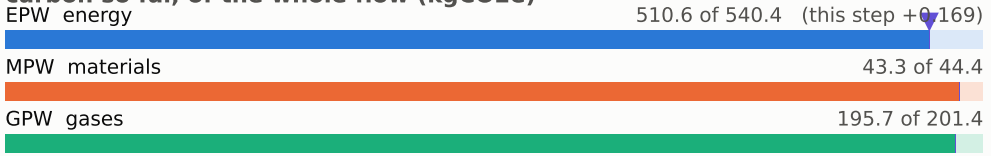


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

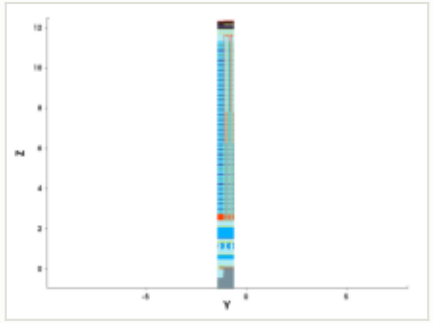


y cut at -1.035 µm

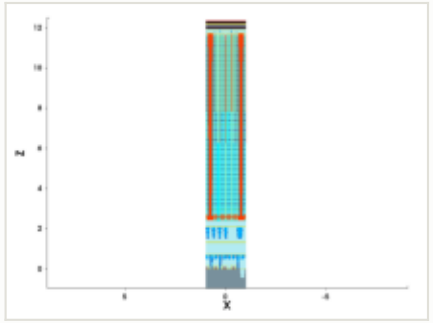


mask for this step

no mask for this step


steps by process area

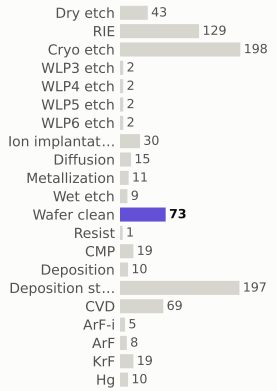

materials deposited (g)

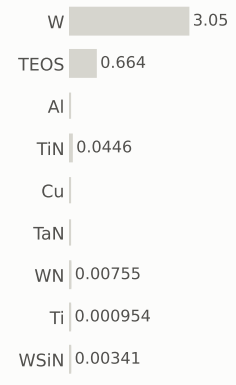

gases emitted (g)



Step #8770: ArF-i

litho_patterning · ArF-i

0.217	749.9	0.028%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	ArF-i
material	—
thickness	—
material GWP	—
input gases	—
energy	0.36 kWh + 0.144 overhead

EPW	0.217 kgCO2e
EPW tool	0.155 kgCO2e
EPW overhead	0.0619 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.217 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

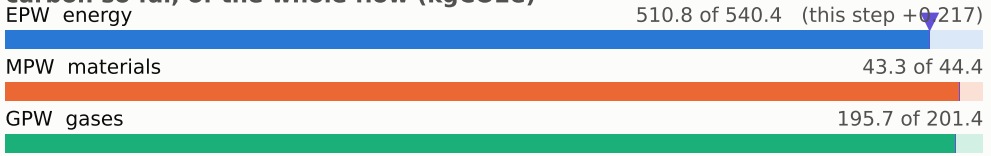


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

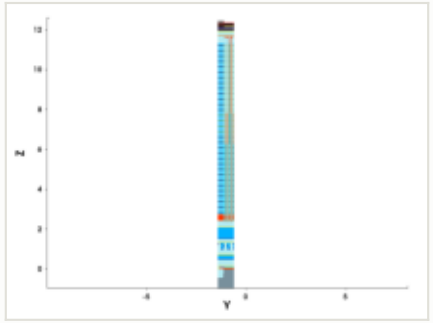


y cut at -1.035 µm

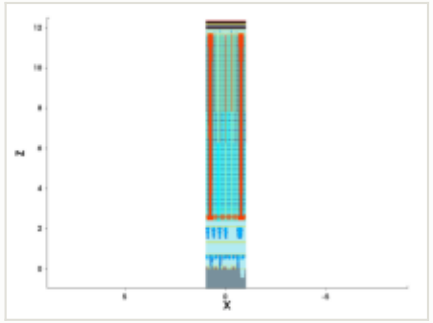


mask: layer 44:0 (OASIS)




steps by process area

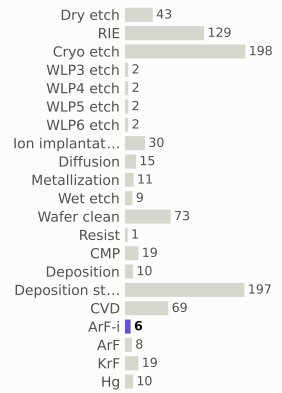

materials deposited (g)

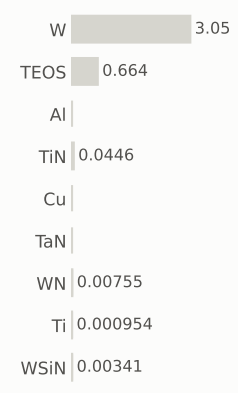

gases emitted (g)

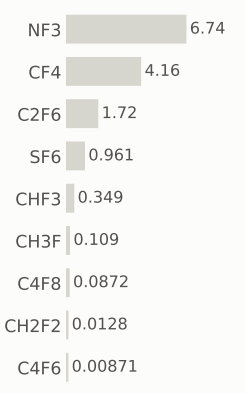

Step #8780: RIE

etch_anisotropic · RIE

1.04	750.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

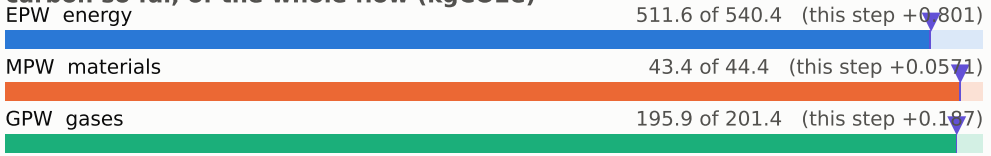


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

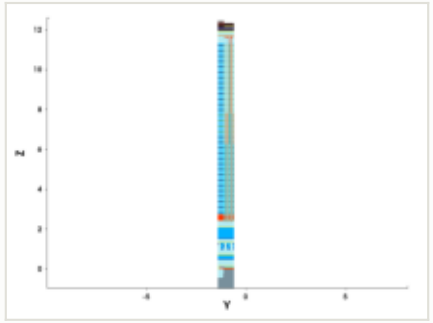


y cut at -1.035 µm

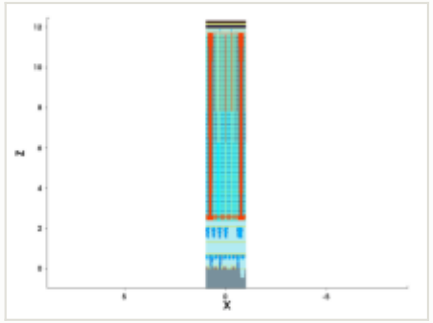


mask for this step

no mask for this step


steps by process area

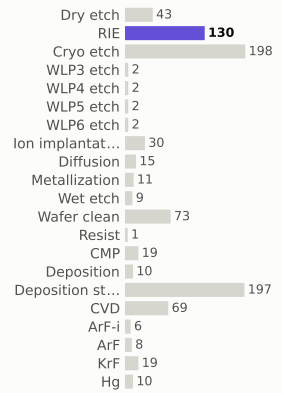

materials deposited (g)

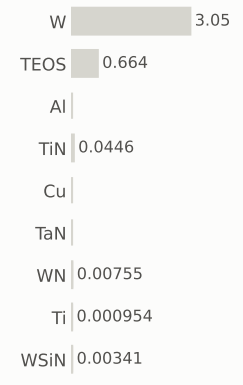

gases emitted (g)

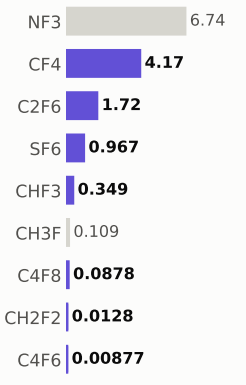

Step #8790: RIE

etch_anisotropic · RIE

1.04	752.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

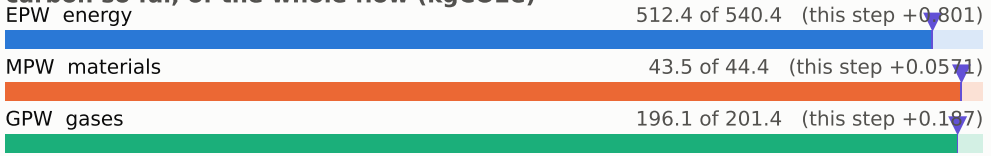


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

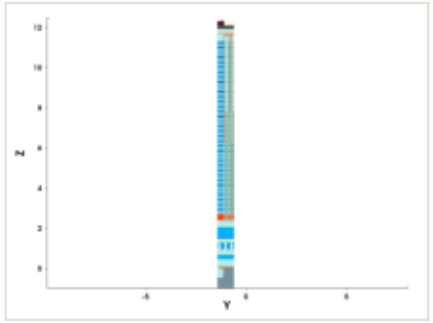


y cut at -1.035 µm

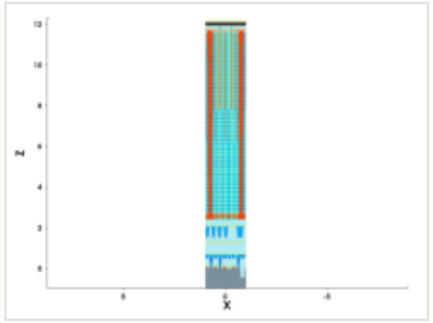


mask for this step

no mask for this step


steps by process area

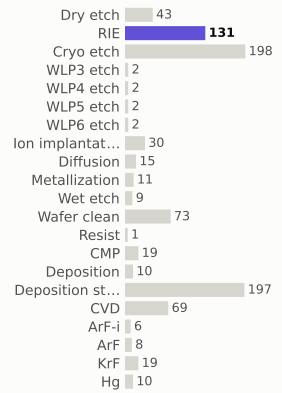

materials deposited (g)

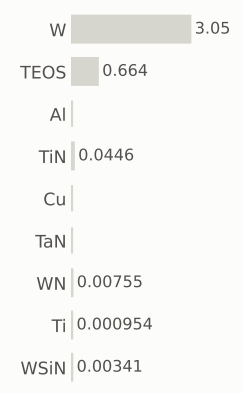

gases emitted (g)

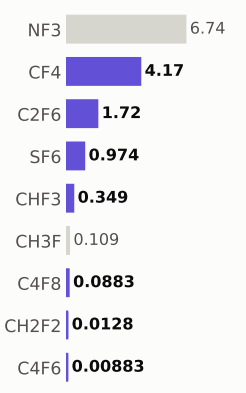

Step #8800: RIE

etch_anisotropic · RIE

1.04	753.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

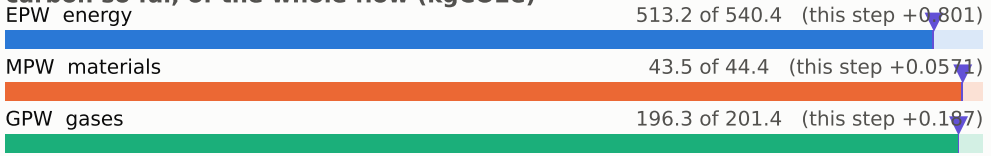


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

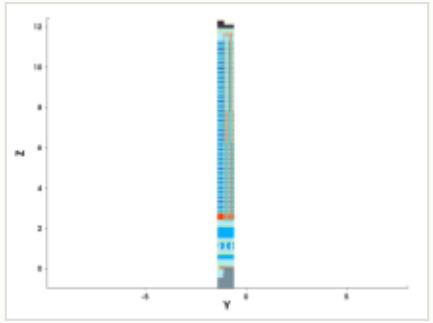


y cut at -1.035 µm

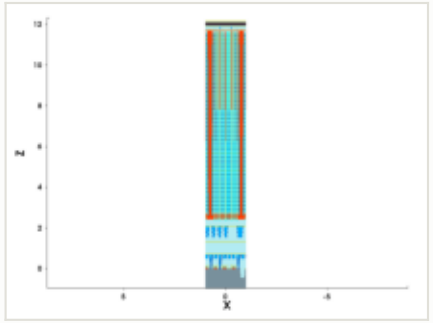


mask for this step

no mask for this step


steps by process area

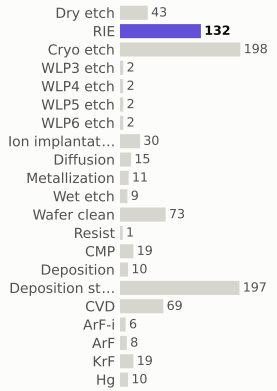

materials deposited (g)

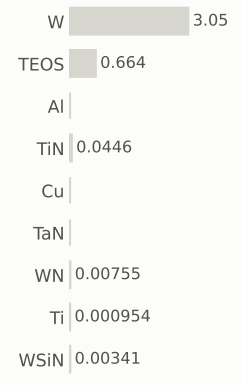

gases emitted (g)



Step #8810: RIE


etch_anisotropic · RIE

1.04	754.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



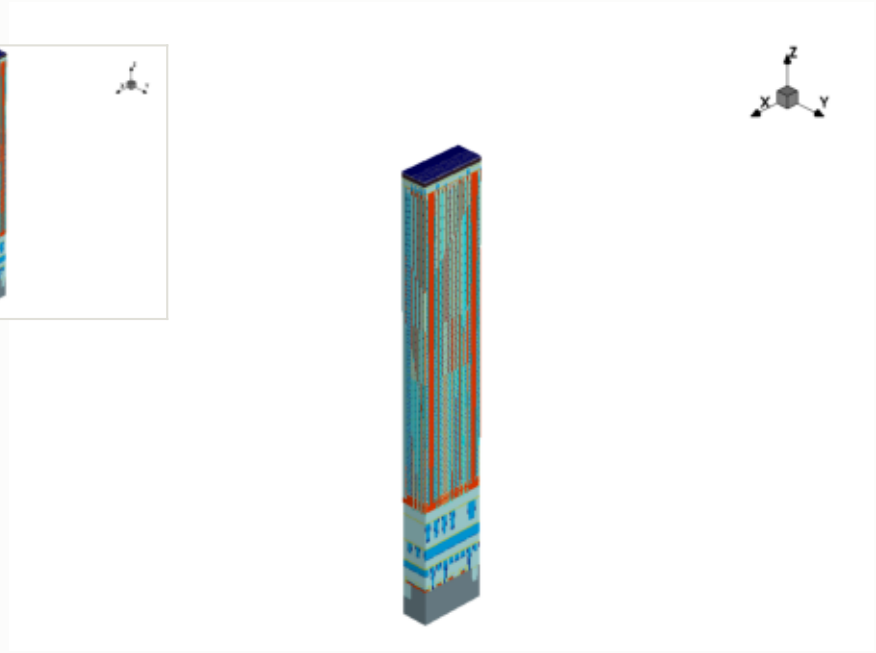


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

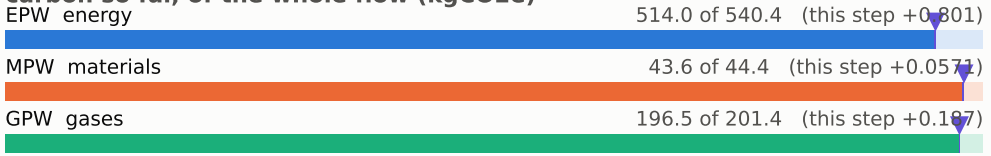


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

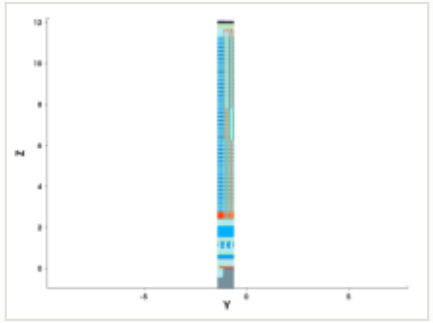


y cut at -1.035 µm

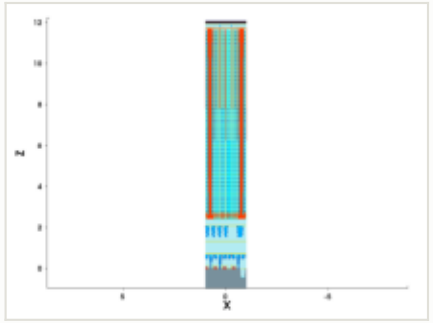


mask for this step

no mask for this step


steps by process area

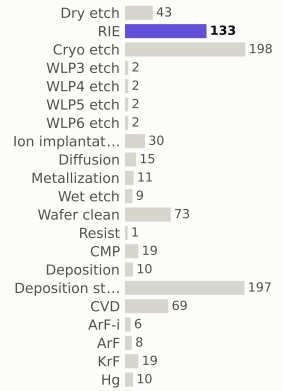

materials deposited (g)

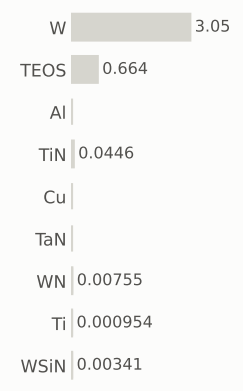

gases emitted (g)



Step #8820: RIE

etch_anisotropic · RIE

1.04	755.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

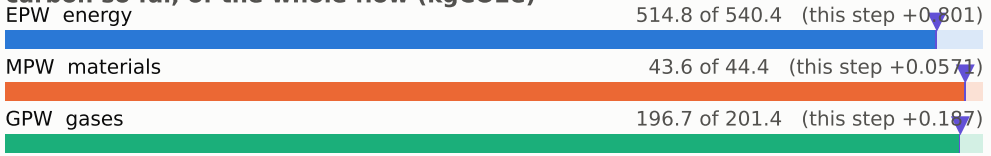


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

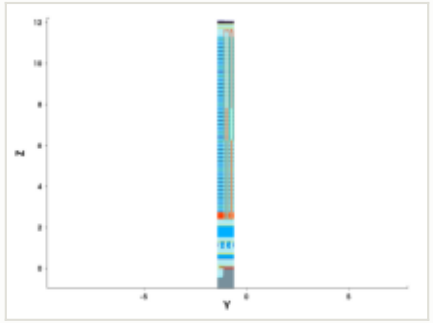


y cut at -1.035 µm

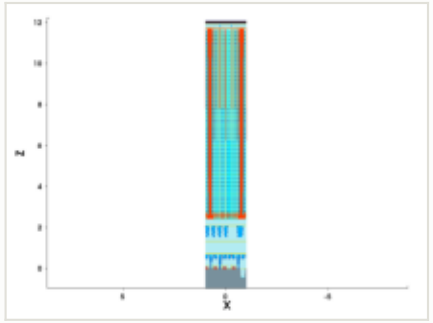


mask for this step

no mask for this step


steps by process area

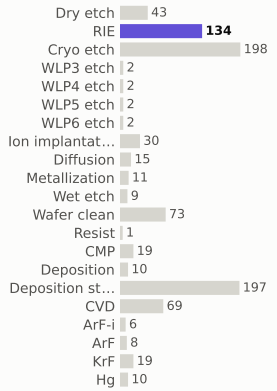

materials deposited (g)

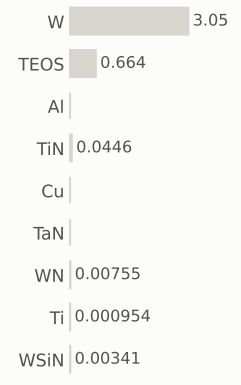

gases emitted (g)



Step #8830: RIE

etch_anisotropic · RIE

1.04	756.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

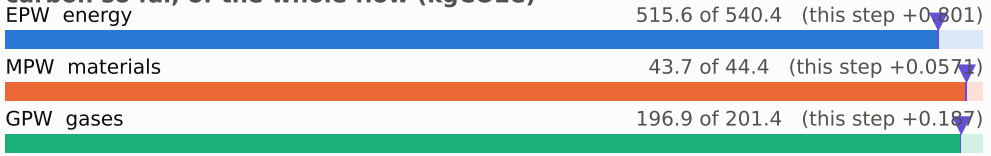


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

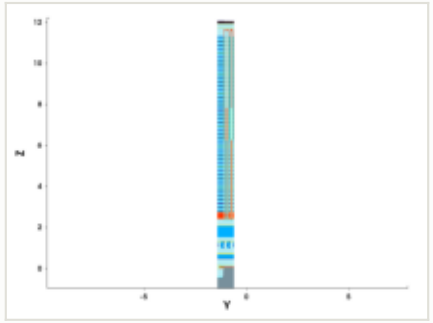


y cut at -1.035 µm

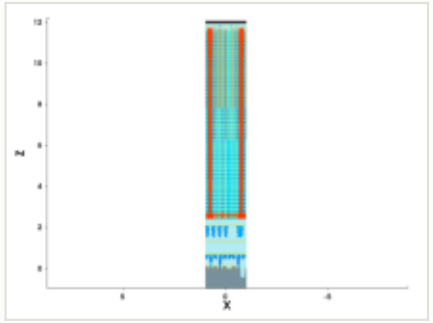


mask for this step

no mask for this step


steps by process area

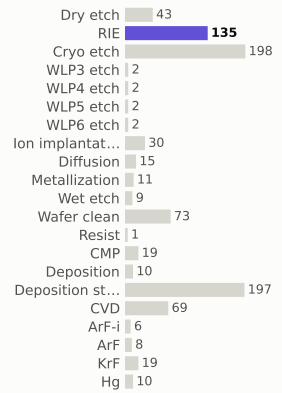

materials deposited (g)

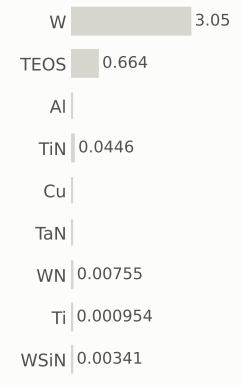

gases emitted (g)

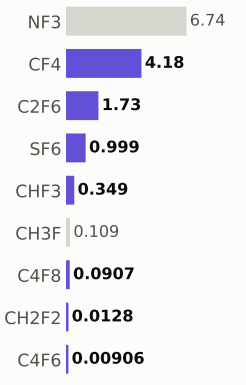

Step #8840: RIE

etch_anisotropic · RIE

1.04	757.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

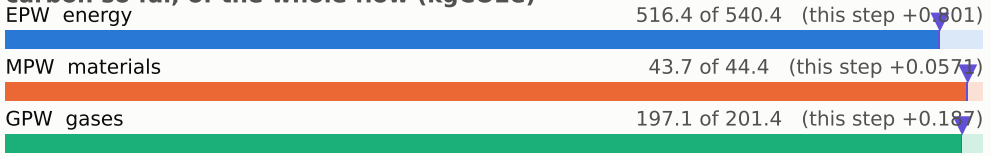


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

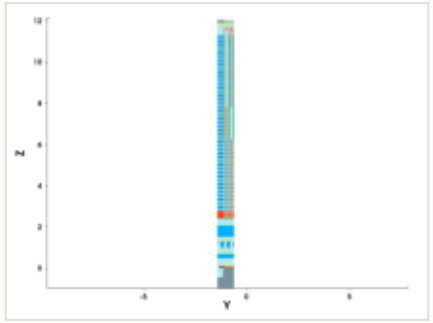


y cut at -1.035 µm

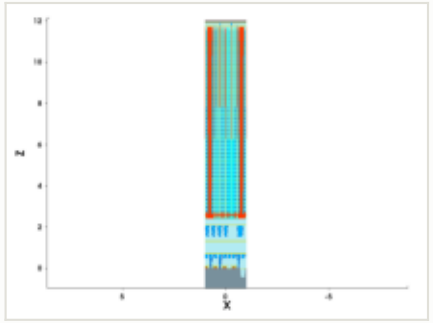


mask for this step

no mask for this step


steps by process area

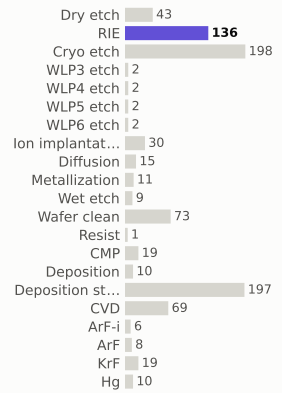

materials deposited (g)

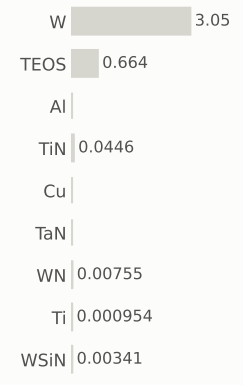

gases emitted (g)

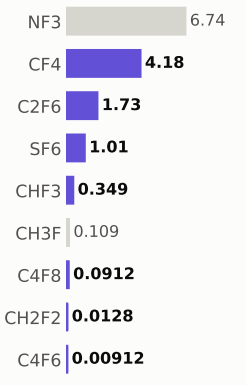

Step #8850: RIE

etch_anisotropic · RIE

1.04	758.2	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

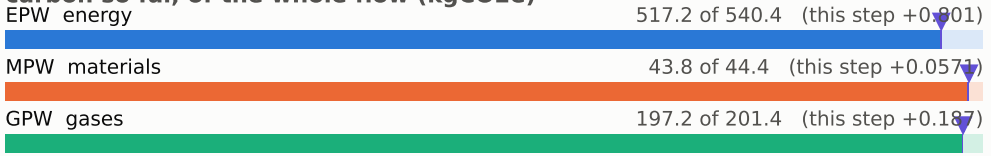


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

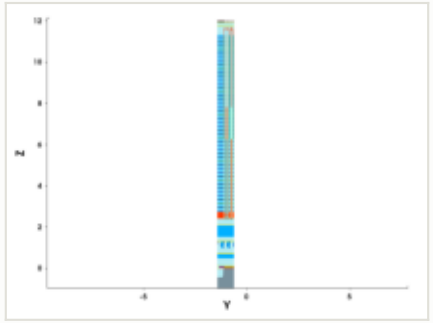


y cut at -1.035 µm

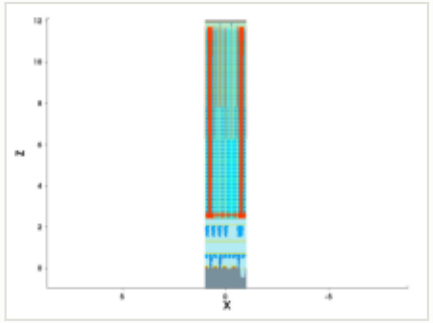


mask for this step

no mask for this step


steps by process area

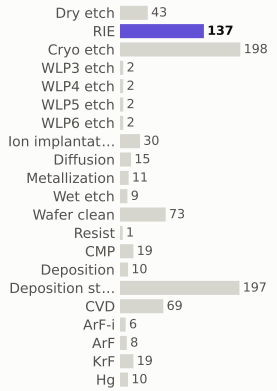

materials deposited (g)

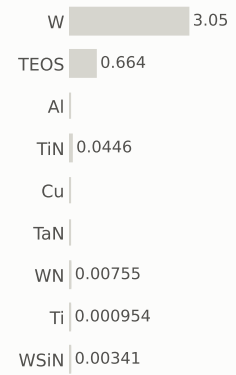

gases emitted (g)



Step #8860: RIE

etch_anisotropic · RIE

1.04	759.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

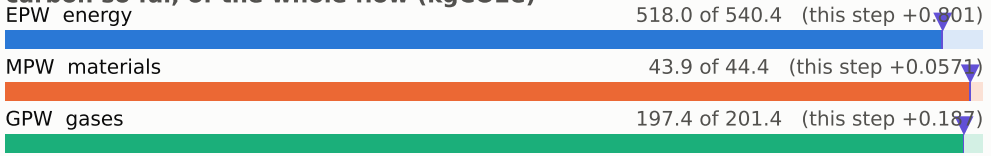


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

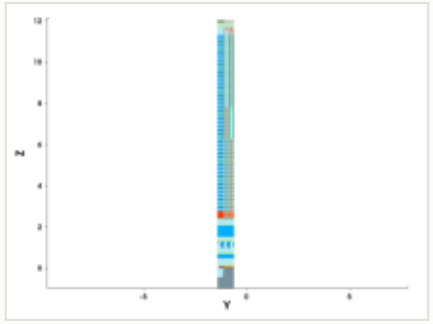


y cut at -1.035 µm

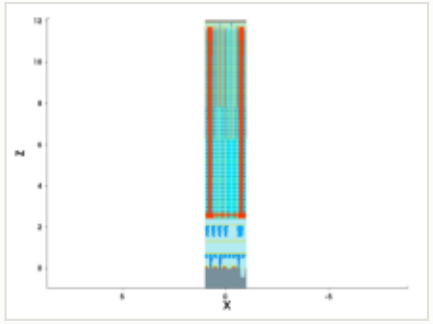


mask for this step

no mask for this step


steps by process area



materials deposited (g)

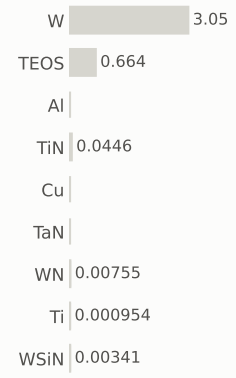

gases emitted (g)

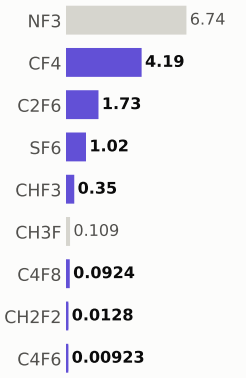

Step #8870: Dry_etch

etch_strip · Dry_etch

0.801	760.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

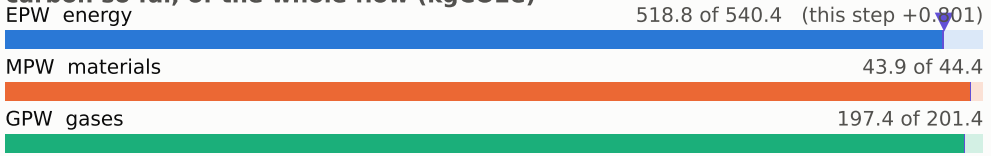


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

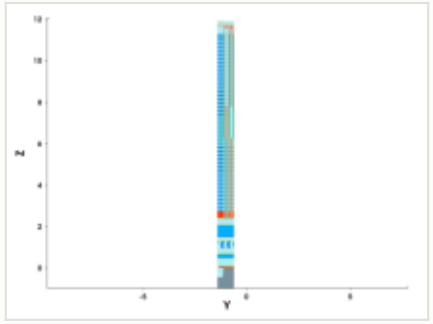


y cut at -1.035 µm

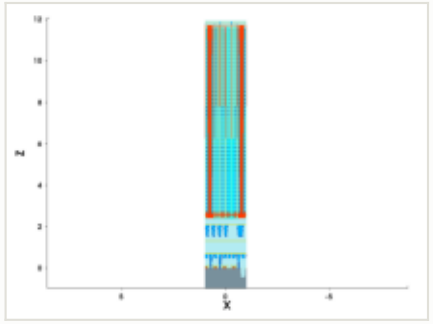


mask for this step

no mask for this step


steps by process area

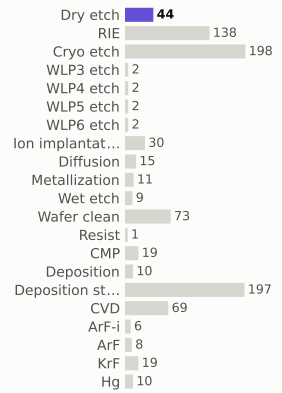

materials deposited (g)

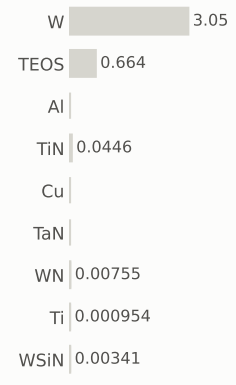

gases emitted (g)



Step #8880: Wafer_clean

clean · Wafer_clean

0.169	760.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step

process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

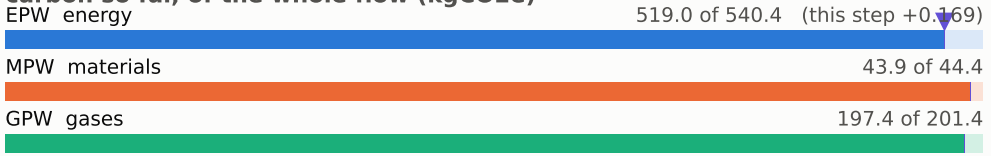


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

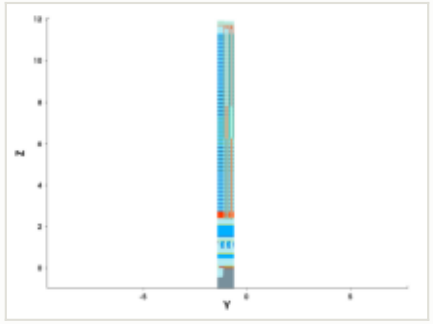


y cut at -1.035 µm

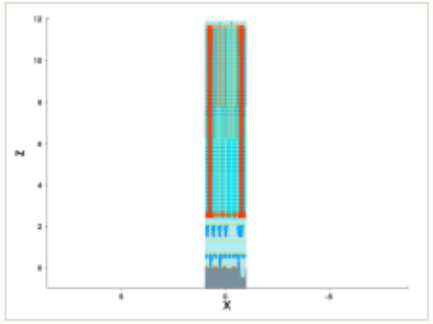


mask for this step

no mask for this step


steps by process area

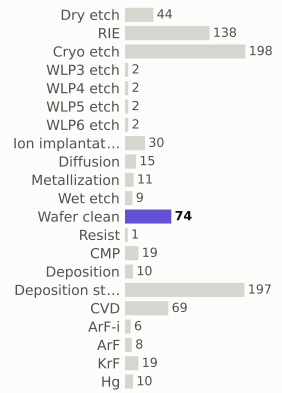

materials deposited (g)

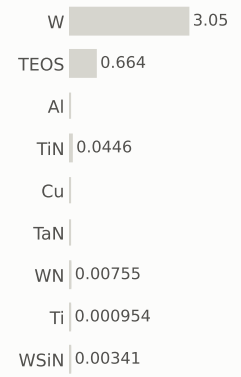

gases emitted (g)



Step #8890: Deposition

depo_ellipsoidal · Deposition

0.656	760.9	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Deposition
material	TaN
thickness	0.01 µm
material GWP	25.8159 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.00025 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

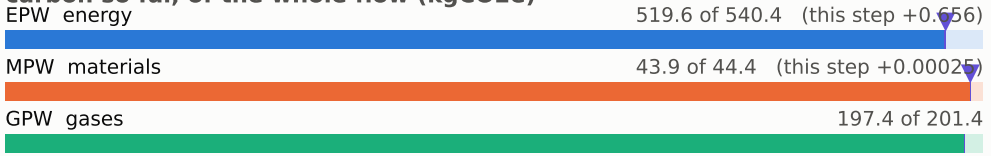


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

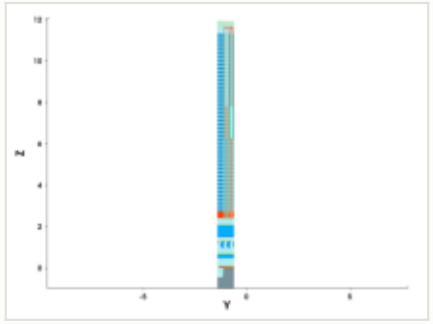


y cut at -1.035 µm

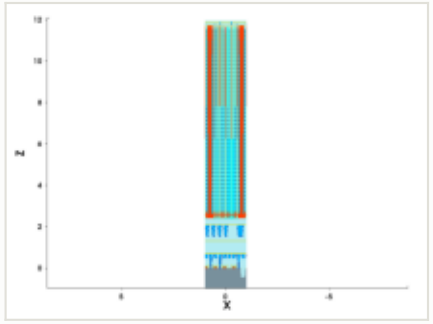


mask for this step

no mask for this step


steps by process area

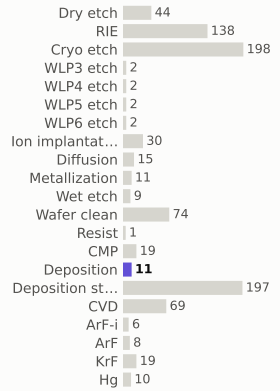

materials deposited (g)

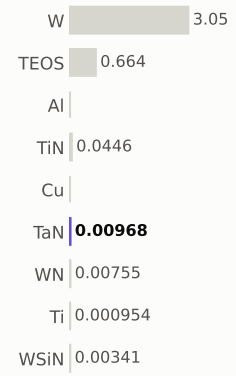

gases emitted (g)



Step #8900: Metallization

depo_isotropic · Metallization

1.2	762.1	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

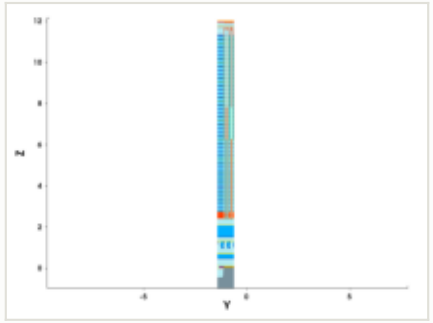

y cut at -1.035 µm

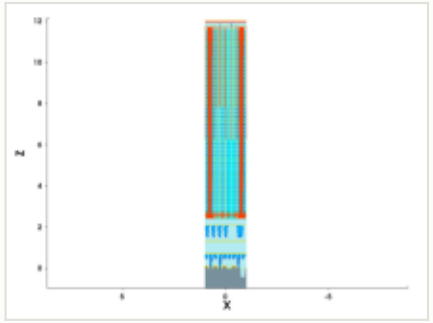

mask for this step


no mask for this step

this step


process area	Metallization
material	Cu
thickness	0.07 µm
material GWP	6.09011 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00027 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

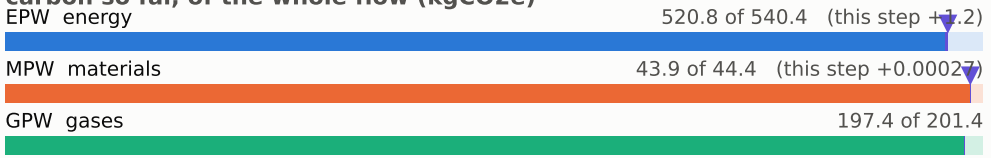


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

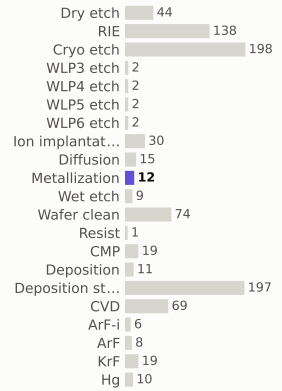

materials deposited (g)

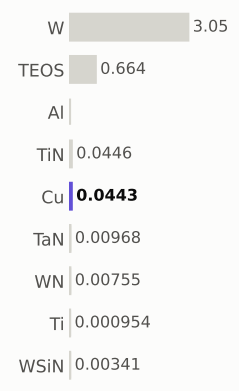

gases emitted (g)



Step #8910: Diffusion

anneal · Diffusion

0.801	762.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

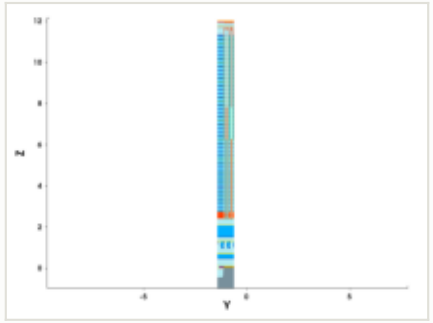

y cut at -1.035 µm

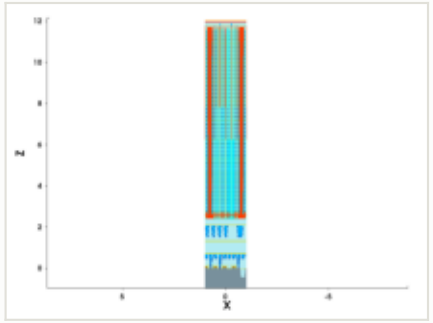

mask for this step

no mask for this step


this step

process area	Diffusion
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead


EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**

spx ran with 0 values for: TemperatureRamp


carbon so far, of the whole flow (kgCO2e)

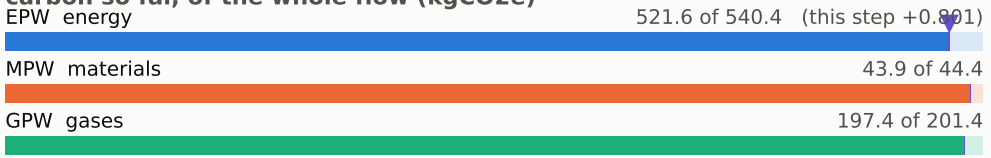


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

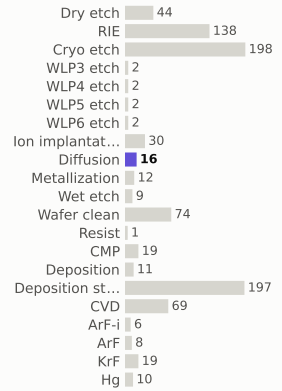

materials deposited (g)

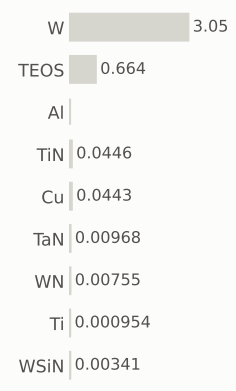

gases emitted (g)



Step #8920: CMP

etch_cmp · CMP

0.169	763.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

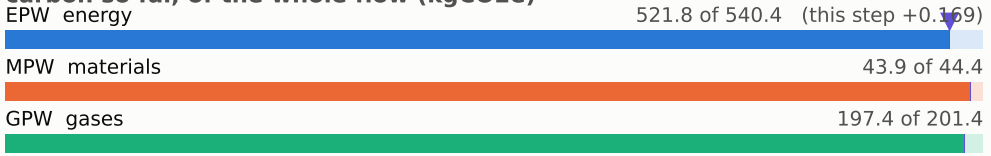


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

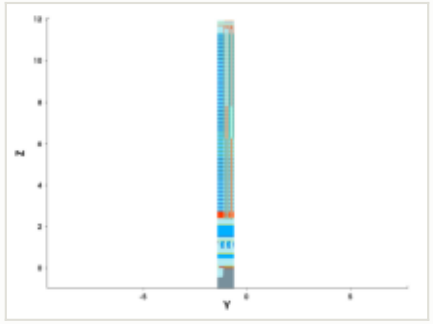


y cut at -1.035 µm

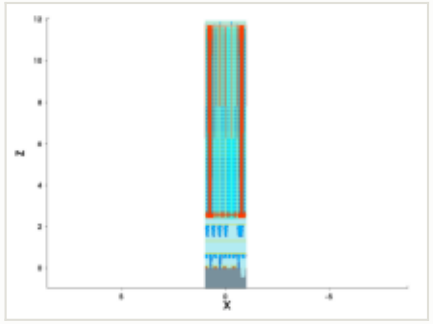


mask for this step

no mask for this step


steps by process area

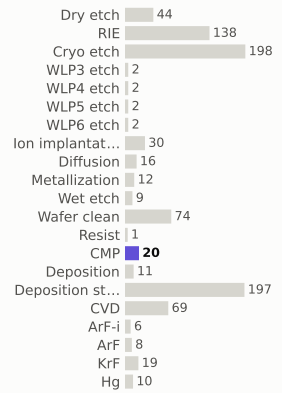

materials deposited (g)

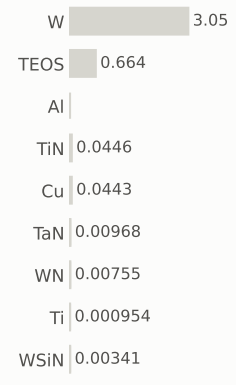

gases emitted (g)



Step #8930: Wafer_clean

clean · Wafer_clean

0.169	763.2	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

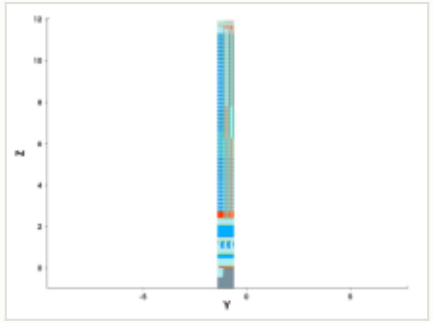

y cut at -1.035 µm

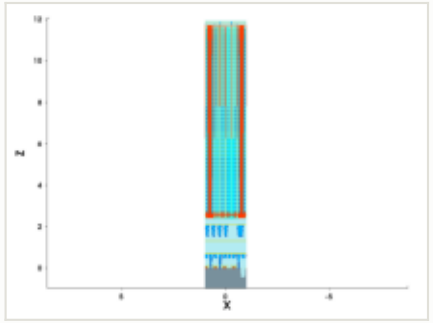

mask for this step

no mask for this step


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead


EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

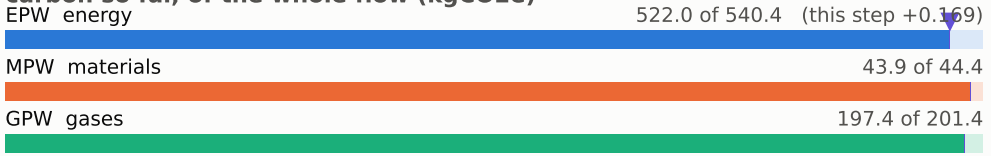


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

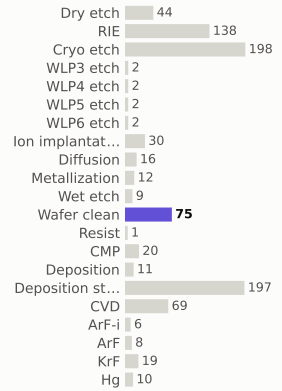

materials deposited (g)

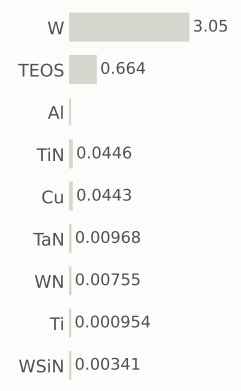

gases emitted (g)



Step #8950: CVD

depo_isotropic · CVD

1.31	764.6	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.075 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

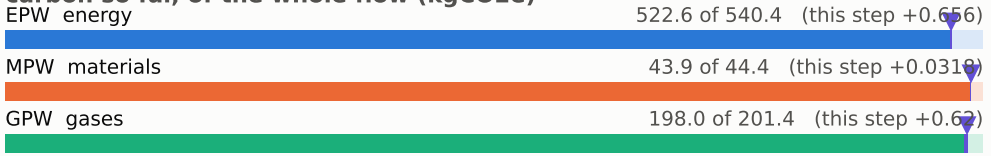


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

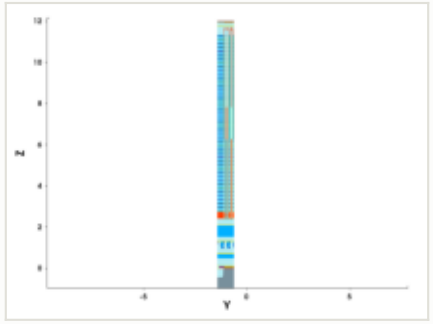


y cut at -1.035 µm

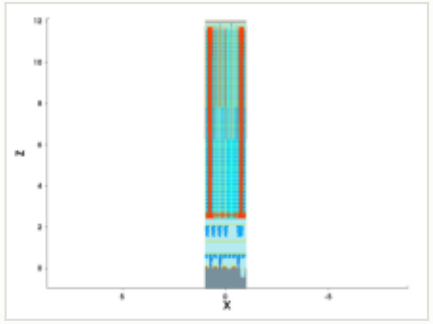


mask for this step

no mask for this step


steps by process area

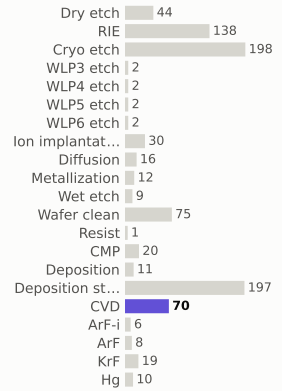

materials deposited (g)

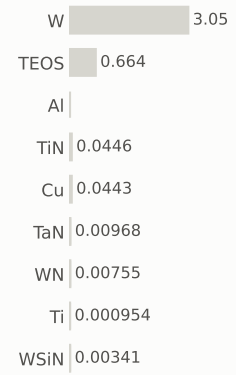

gases emitted (g)



Step #8960: CVD

depo_isotropic · CVD

1.31	765.9	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

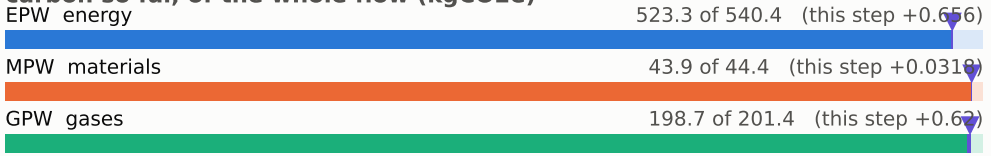


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

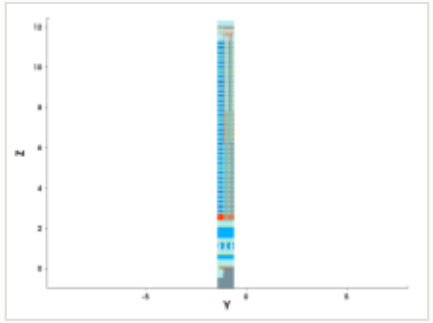


y cut at -1.035 µm

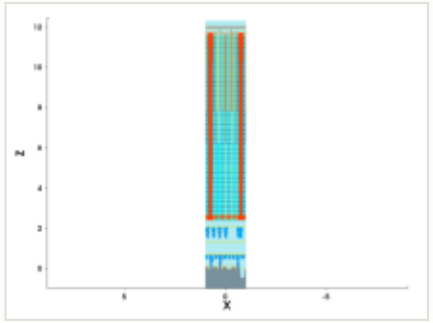


mask for this step

no mask for this step


steps by process area

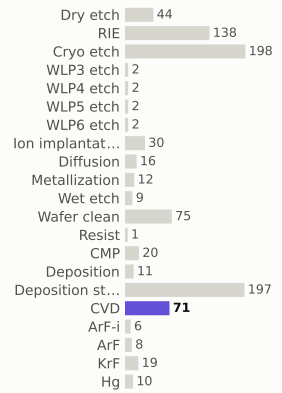

materials deposited (g)

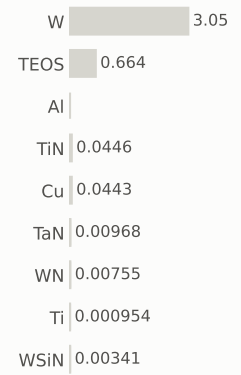

gases emitted (g)



Step #8970: ArF

litho_patterning · ArF

0.199	766.1	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	ArF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

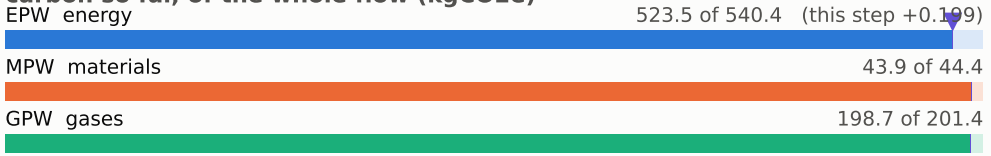


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

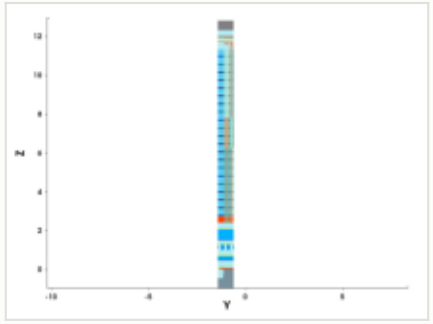


y cut at -1.035 µm

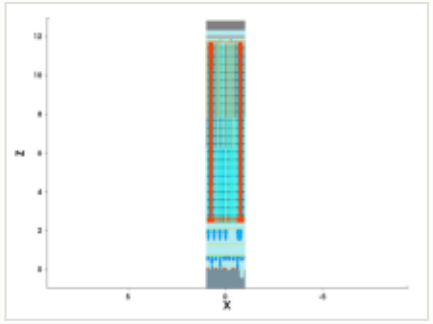

mask: layer 45:0, positive (OASIS)




steps by process area

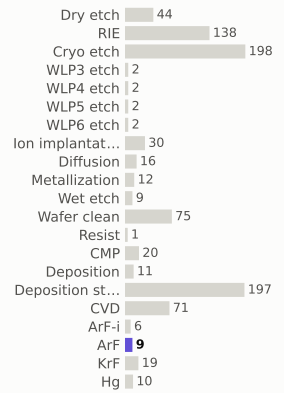

materials deposited (g)



gases emitted (g)

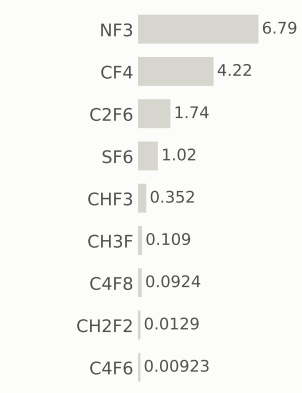

Step #8980: RIE

etch_anisotropic · RIE

1.04	767.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

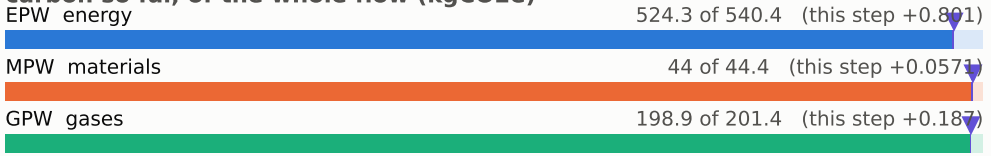


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

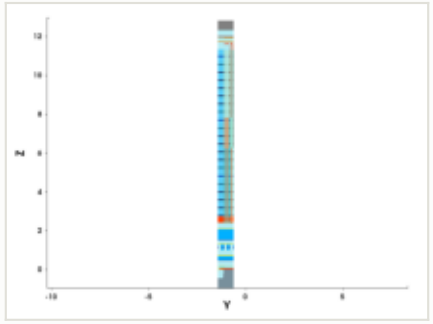


y cut at -1.035 µm

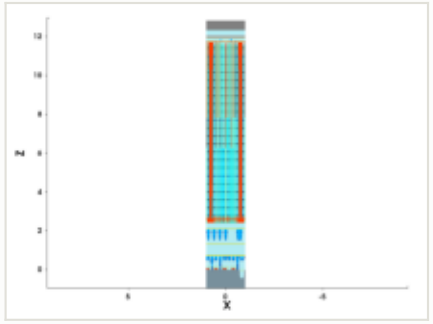


mask for this step

no mask for this step


steps by process area

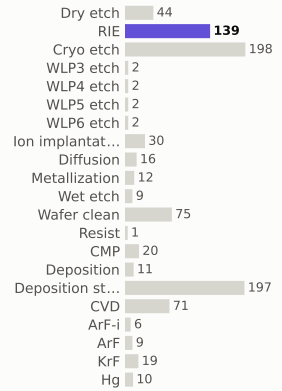

materials deposited (g)

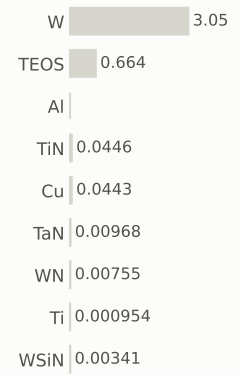

gases emitted (g)

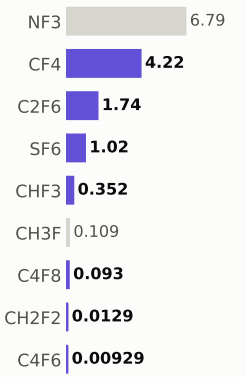

Step #8990: RIE

etch_anisotropic · RIE

1.04	768.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

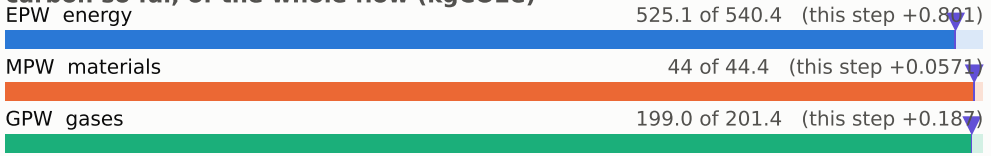


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

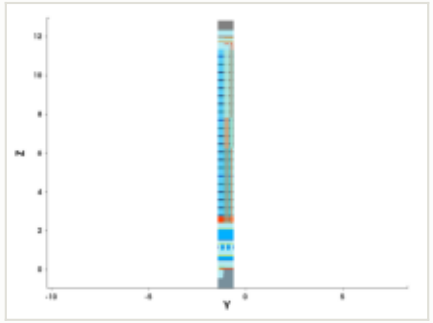


y cut at -1.035 µm

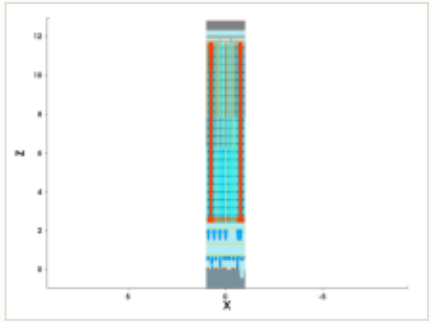


mask for this step

no mask for this step


steps by process area

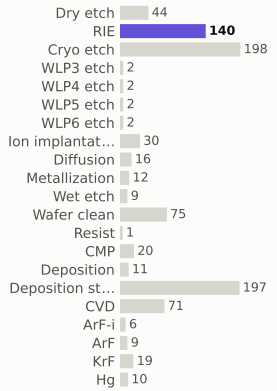

materials deposited (g)

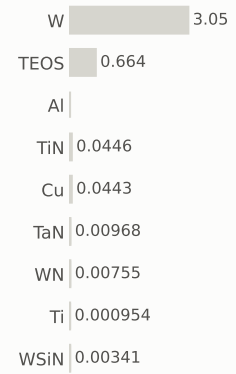

gases emitted (g)

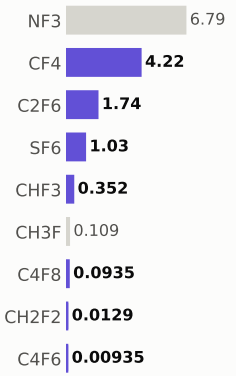

Step #9000: Dry_etch

etch_strip · Dry_etch

0.801	768.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

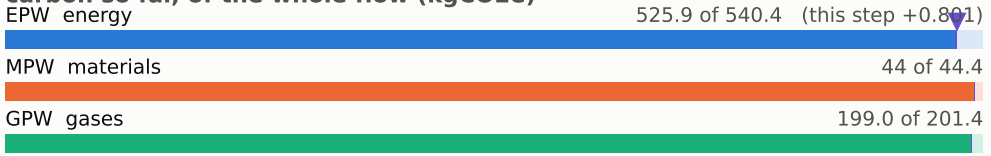


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

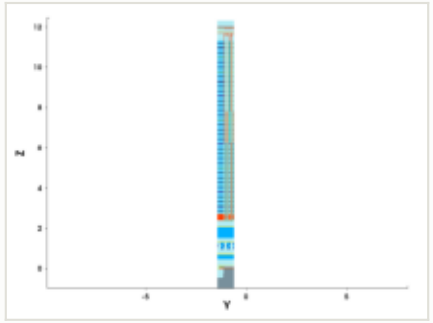


y cut at -1.035 µm

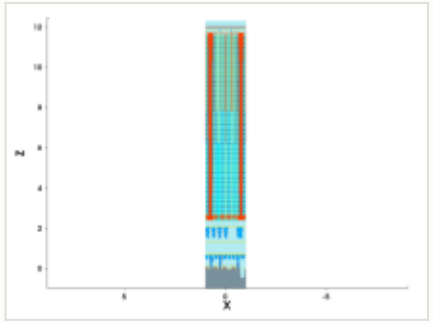


mask for this step

no mask for this step


steps by process area

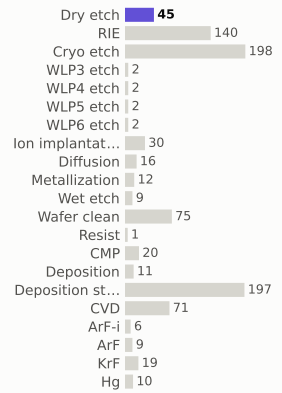

materials deposited (g)

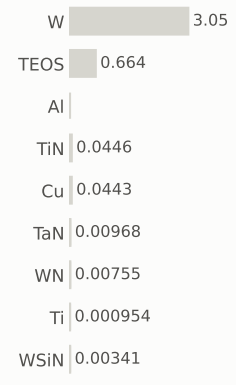

gases emitted (g)

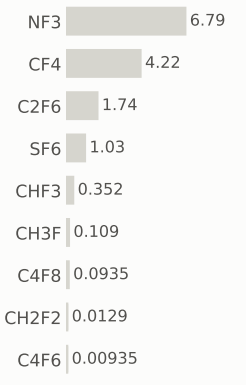

Step #9010: Wafer_clean

clean · Wafer_clean

0.169	769.1	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

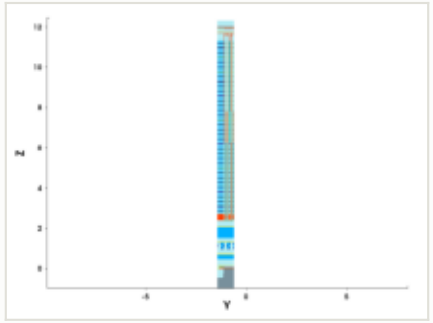

y cut at -1.035 µm

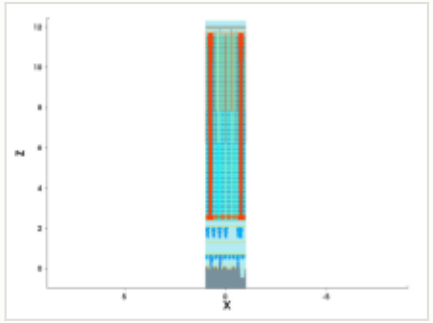

mask for this step

no mask for this step


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead


EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

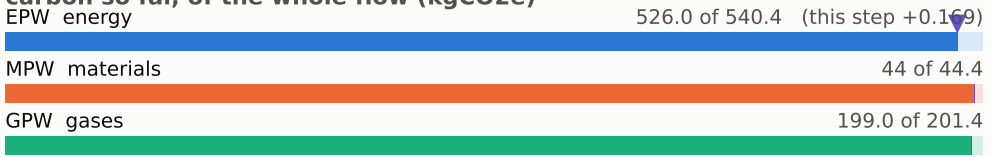


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

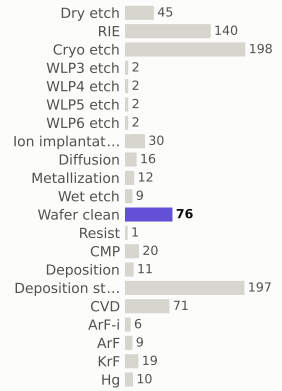

materials deposited (g)

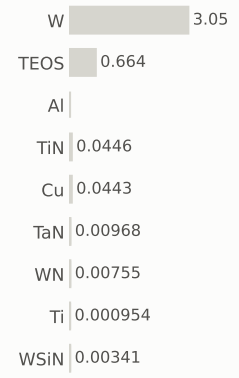

gases emitted (g)



Step #9020: CVD

depo_isotropic · CVD

1.31	770.4	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	TiN
thickness	0.005 µm
material GWP	43.9778 gCO2e/g
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

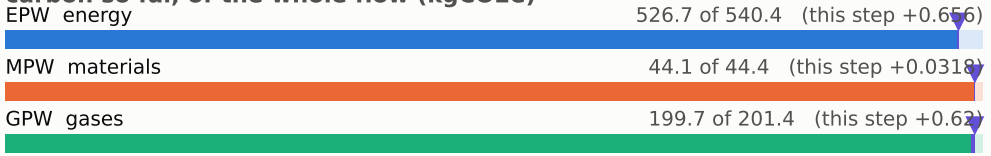


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

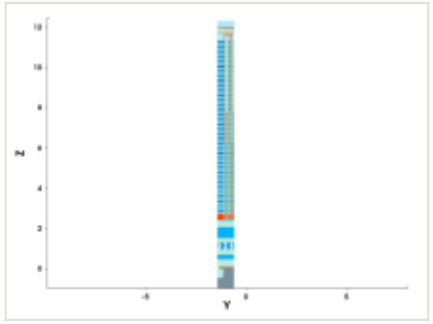


y cut at -1.035 µm

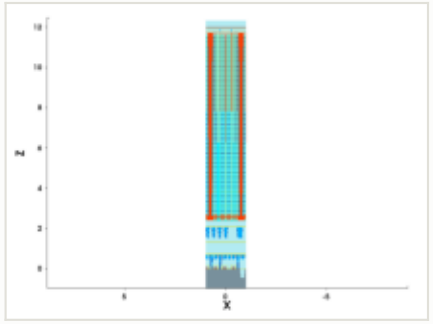


mask for this step

no mask for this step


steps by process area

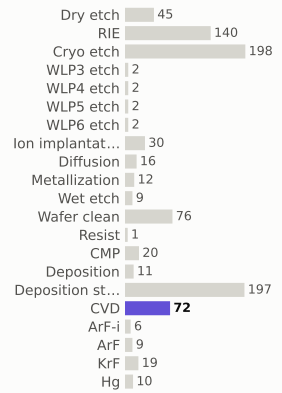

materials deposited (g)



gases emitted (g)

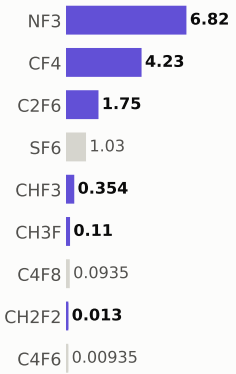

Step #9030: Metallization

depo_isotropic · Metallization

1.21	771.6	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Metallization
material	W
thickness	0.05 µm
material GWP	75.8149 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.00517 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

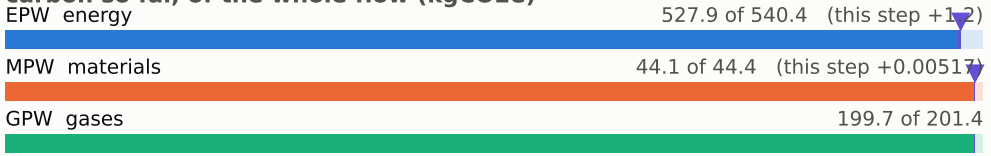


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

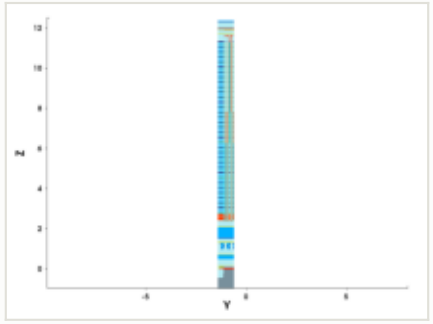


y cut at -1.035 µm

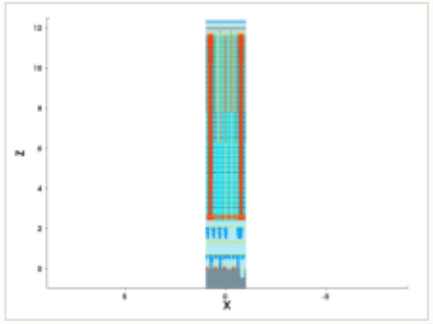


mask for this step

no mask for this step


steps by process area

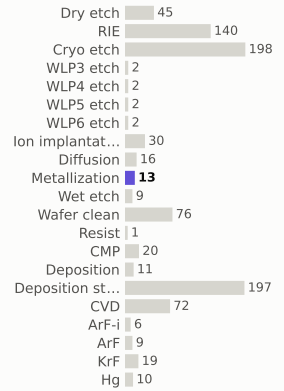

materials deposited (g)

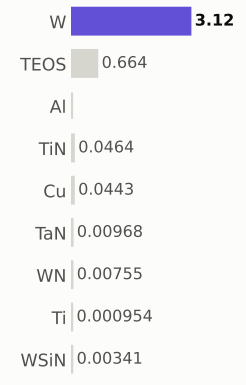

gases emitted (g)

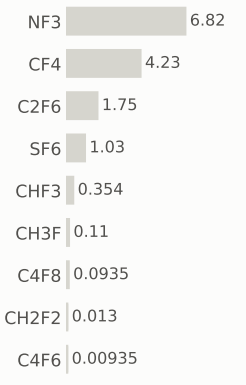

Step #9040: CMP

etch_cmp · CMP

0.169	771.8	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CMP
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead

EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

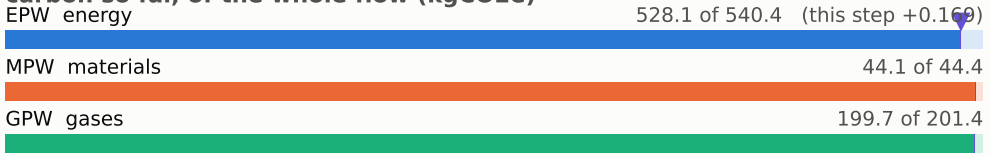


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

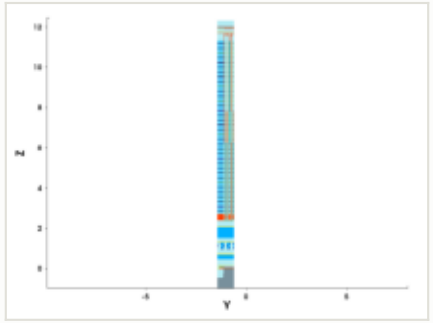


y cut at -1.035 µm

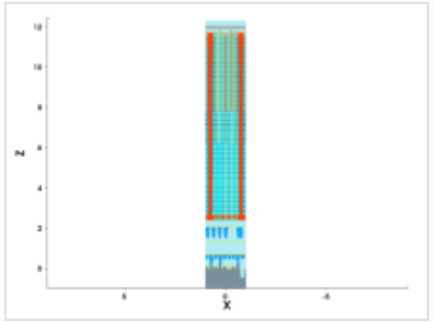


mask for this step

no mask for this step


steps by process area

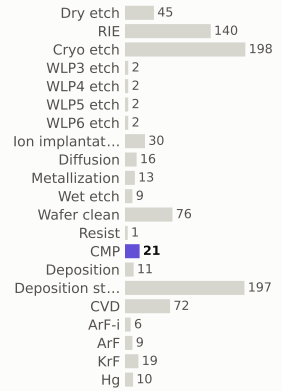

materials deposited (g)

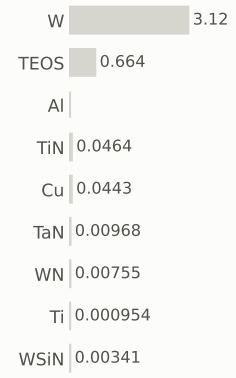

gases emitted (g)



Step #9050: Wafer_clean

clean · Wafer_clean

0.169	772.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

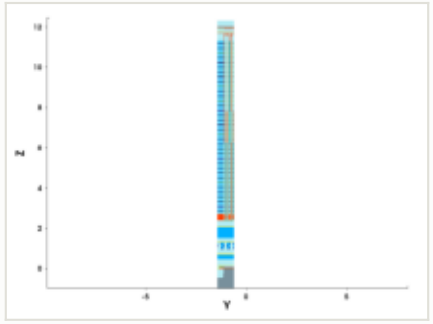

y cut at -1.035 µm

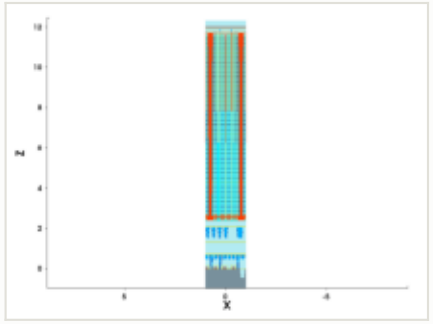

mask for this step

no mask for this step


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead


EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

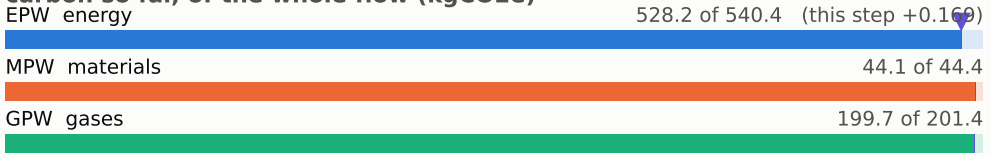


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

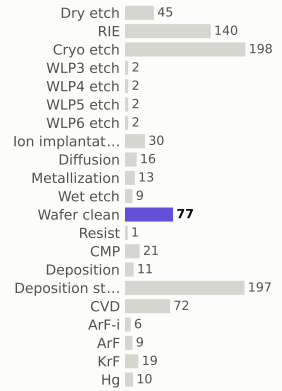

materials deposited (g)

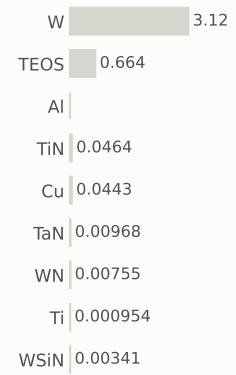

gases emitted (g)

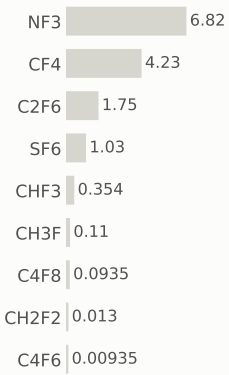

Step #9070: Metallization


depo_isotropic · Metallization

1.2	773.2	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



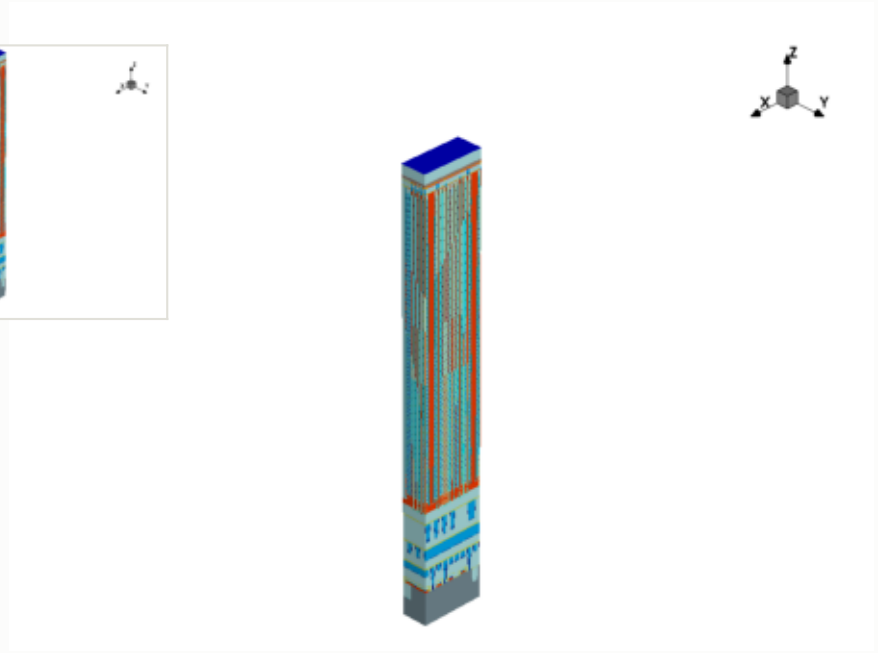


this step


process area	Metallization
material	Ti
thickness	0.01 µm
material GWP	47.6334 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.000152 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.2 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

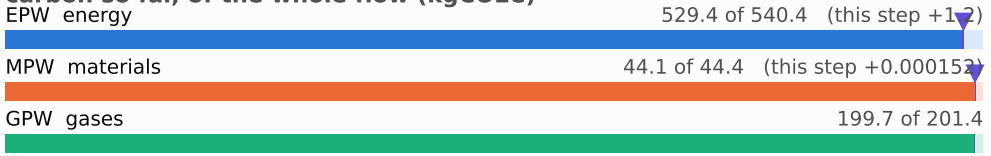


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

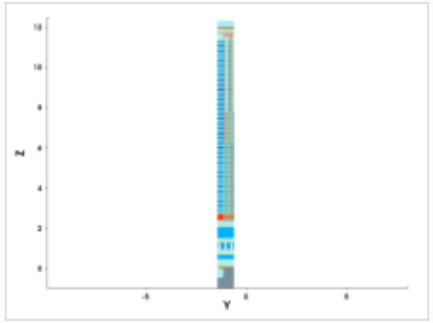


y cut at -1.035 µm

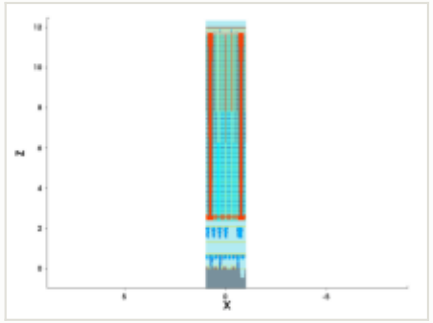


mask for this step

no mask for this step


steps by process area

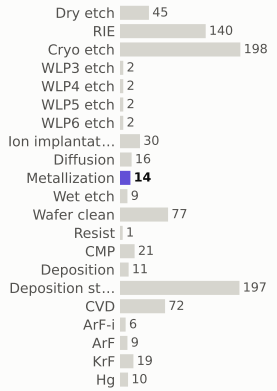

materials deposited (g)

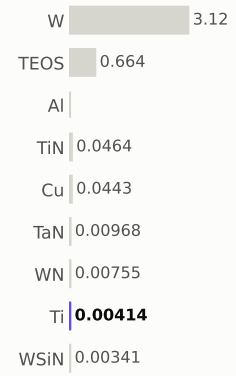

gases emitted (g)

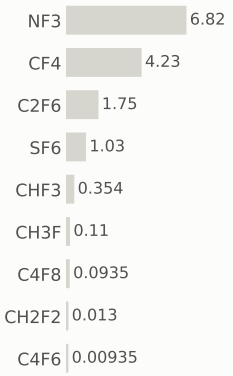

Step #9080: Metallization

depo_isotropic · Metallization

1.21	774.4	0.15%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Metallization
material	Al
thickness	0.635 µm
material GWP	10.7269 gCO2e/g
input gases	—
energy	2 kWh + 0.8 overhead

EPW	1.2 kgCO2e
EPW tool	0.86 kgCO2e
EPW overhead	0.344 kgCO2e
MPW	0.0013 kgCO2e
GPW	0 kgCO2e
embodied carbon	**1.21 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

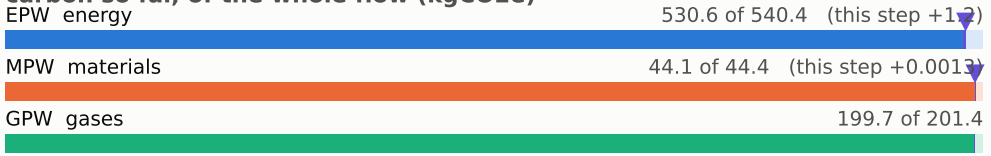


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

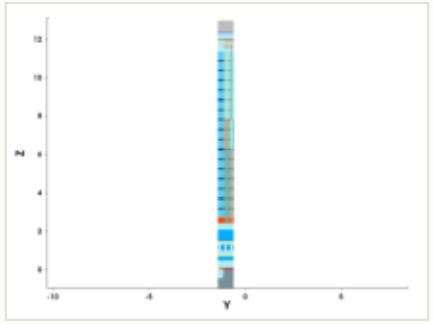


y cut at -1.035 µm

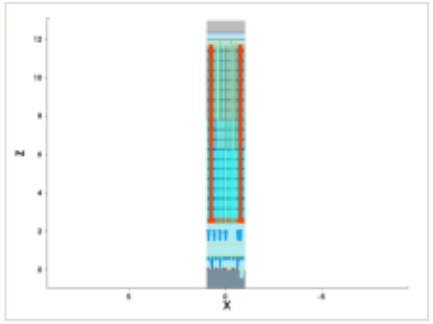


mask for this step

no mask for this step


steps by process area

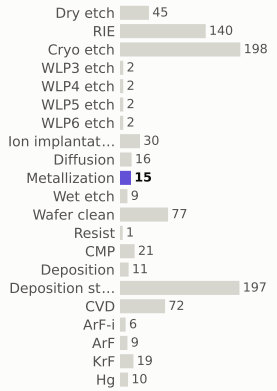

materials deposited (g)

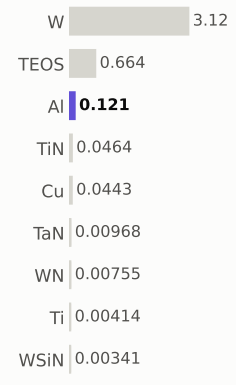

gases emitted (g)

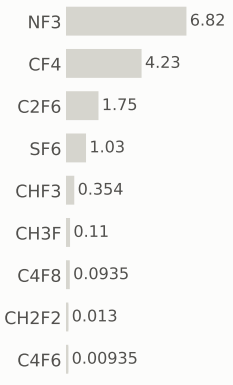

Step #9090: Deposition


depo_isotropic · Deposition

0.657	775.0	0.084%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



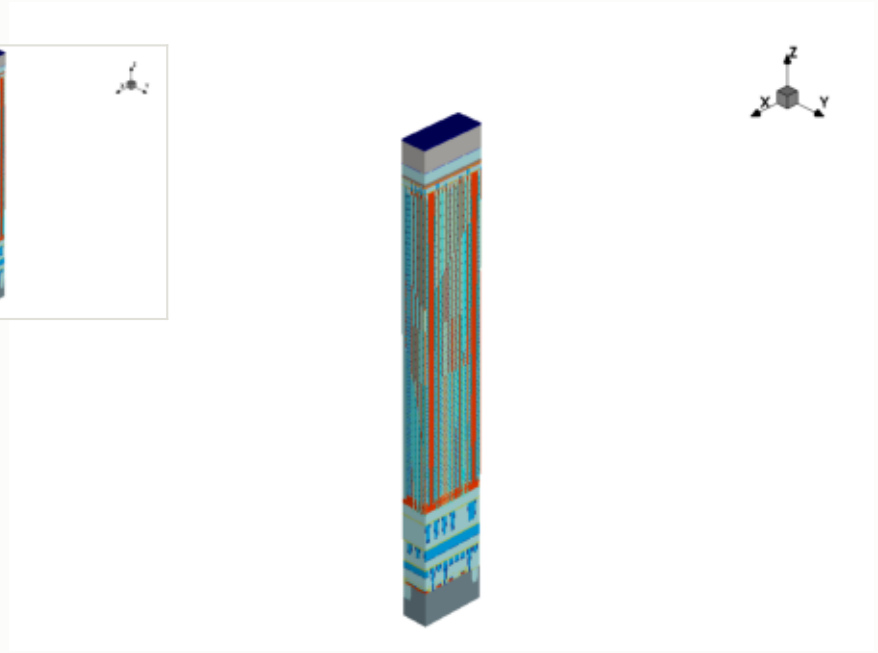


this step


process area	Deposition
material	TiN
thickness	0.048 µm
material GWP	43.9778 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000777 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.657 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

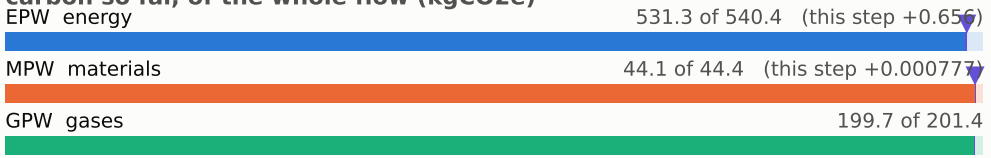


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

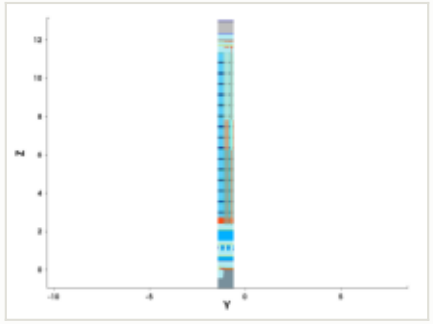


y cut at -1.035 µm

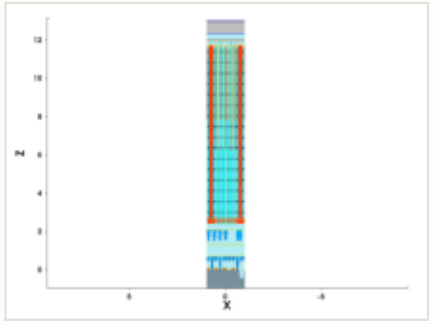

mask for this step

no mask for this step


steps by process area

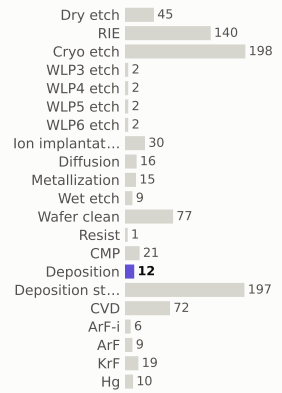

materials deposited (g)



gases emitted (g)

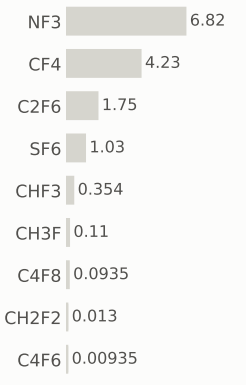

Step #9100: Deposition

depo_isotropic · Deposition

0.656	775.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Deposition
material	—
thickness	0.007 µm
material GWP	—
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

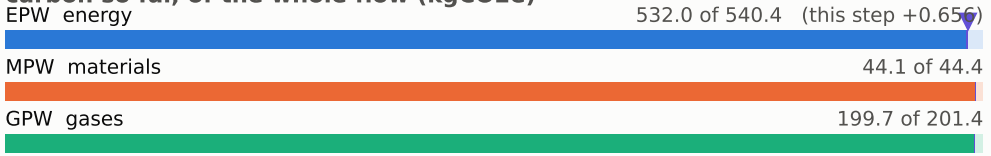


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

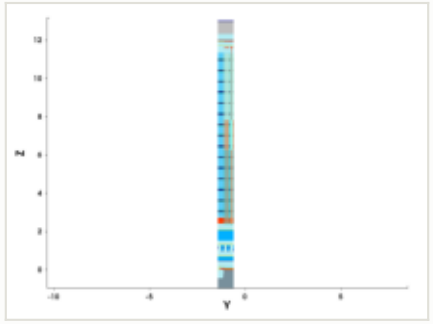


y cut at -1.035 µm

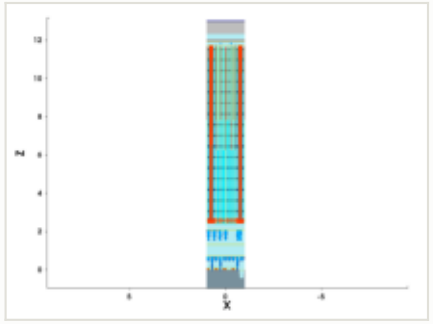

mask for this step

no mask for this step


steps by process area

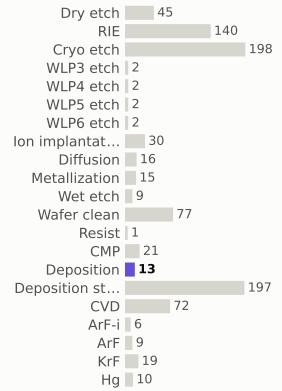

materials deposited (g)



gases emitted (g)

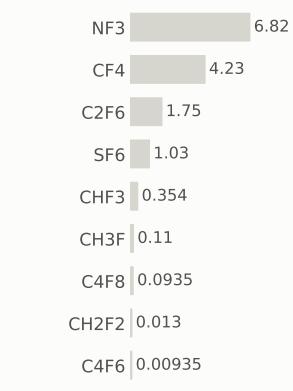

Step #9110: KrF

litho_patterning · KrF

0.199	775.9	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	KrF
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

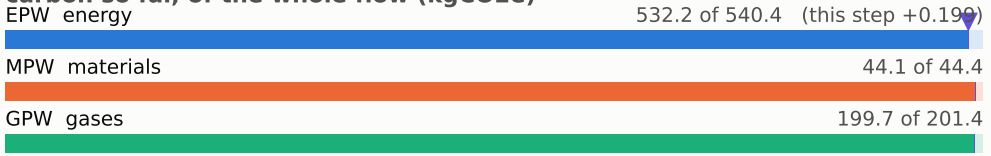


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

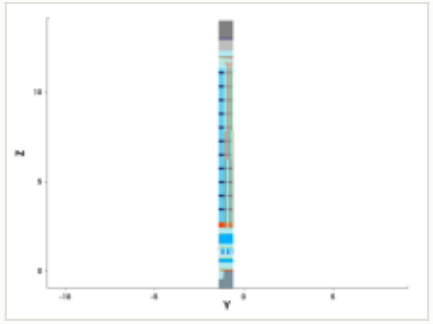


y cut at -1.035 µm

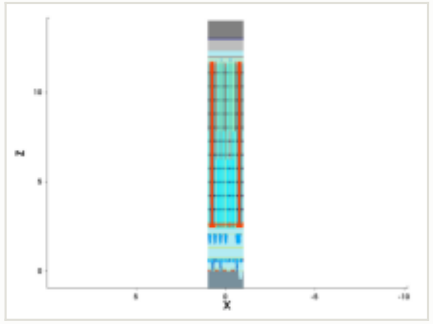


mask: layer 46:0, positive (OASIS)




steps by process area

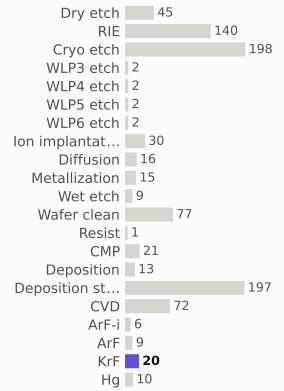

materials deposited (g)

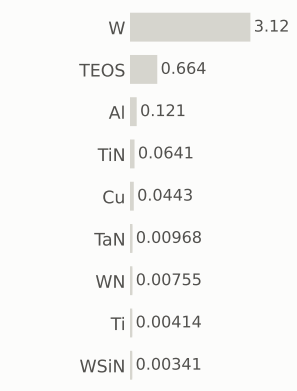

gases emitted (g)



Step #9120: RIE


etch_anisotropic · RIE

1.04	776.9	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



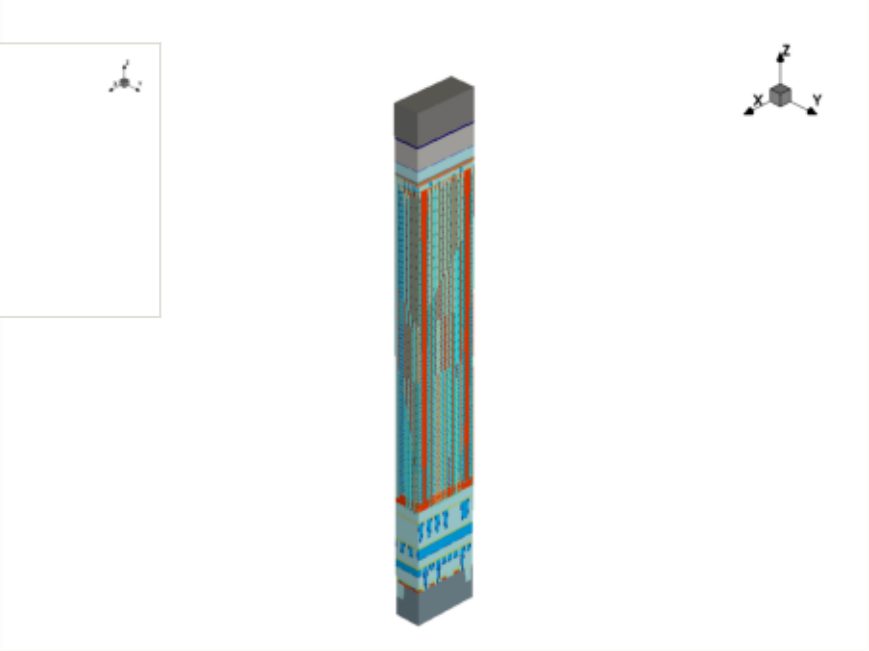


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

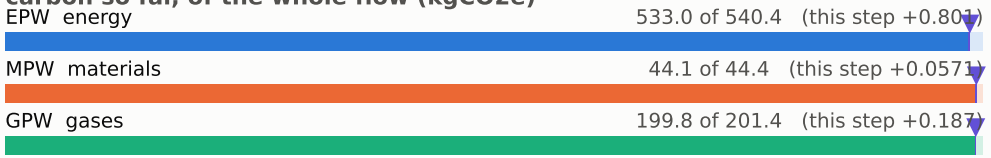


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

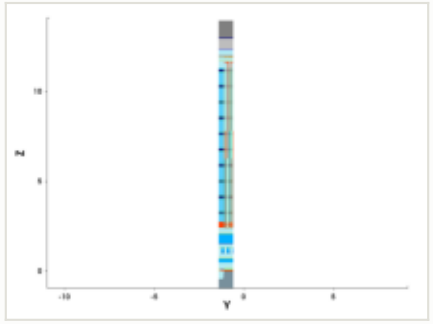


y cut at -1.035 µm

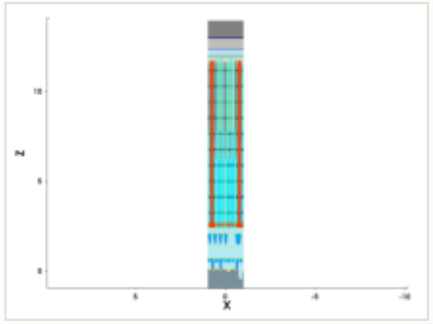

mask for this step

no mask for this step


steps by process area

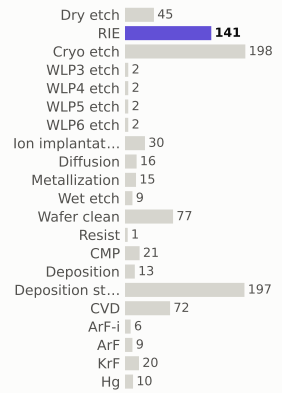

materials deposited (g)



gases emitted (g)

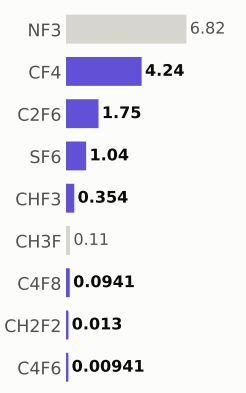

Step #9130: RIE


etch_anisotropic · RIE

1.04	778.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



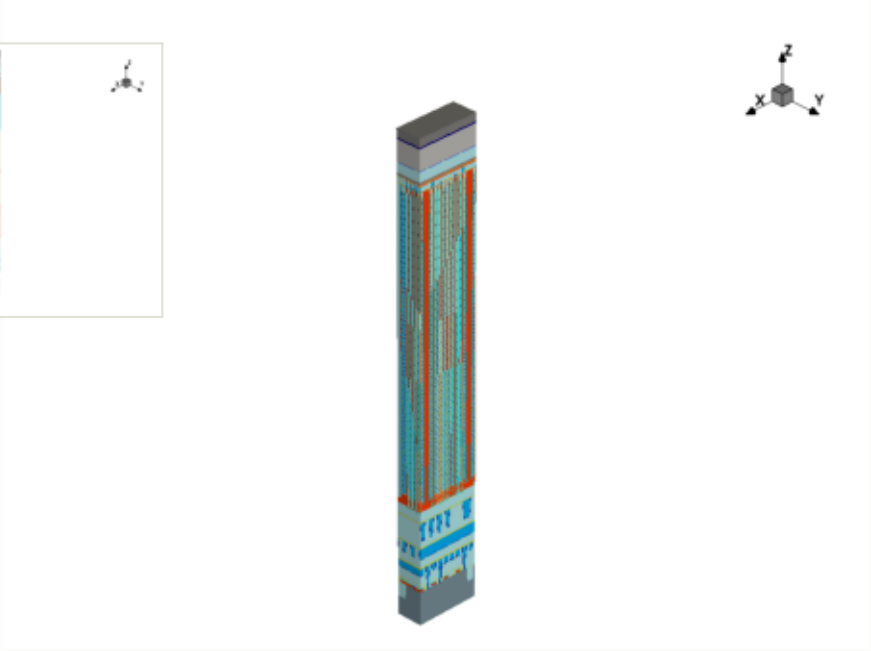


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

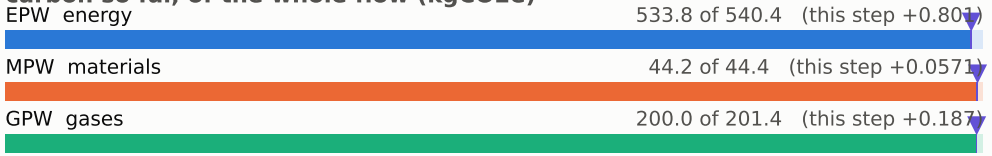


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

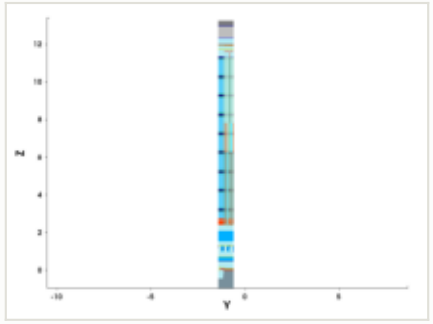


y cut at -1.035 µm

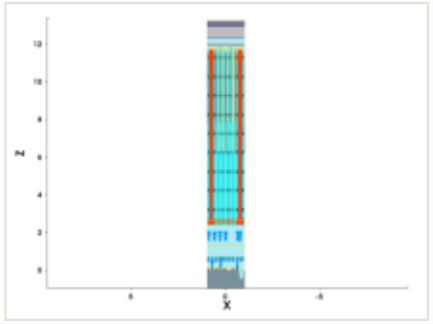


mask for this step

no mask for this step


steps by process area

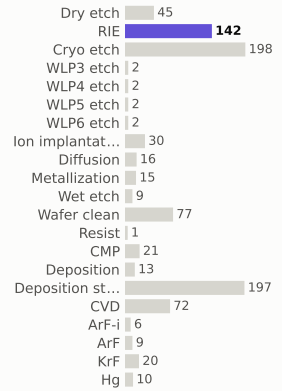

materials deposited (g)

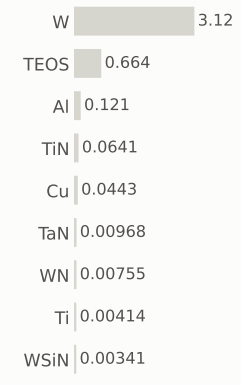

gases emitted (g)

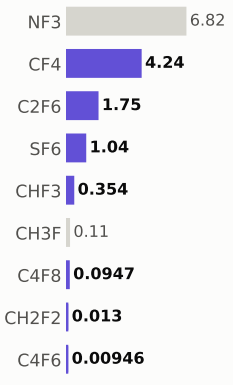

Step #9140: RIE

etch_anisotropic · RIE

1.04	779.0	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

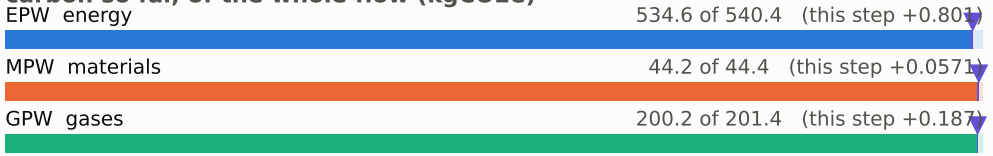


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

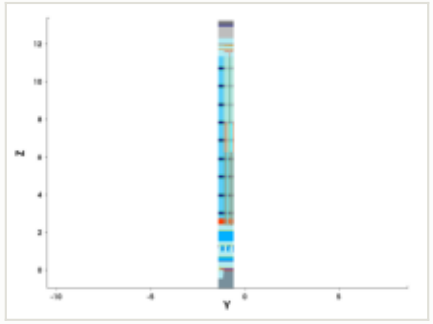


y cut at -1.035 µm

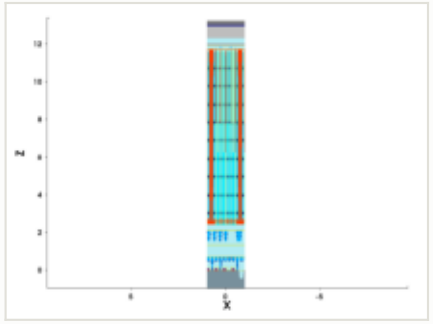

mask for this step

no mask for this step


steps by process area

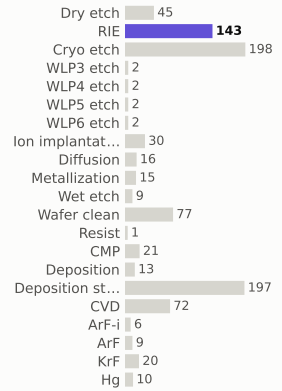

materials deposited (g)



gases emitted (g)

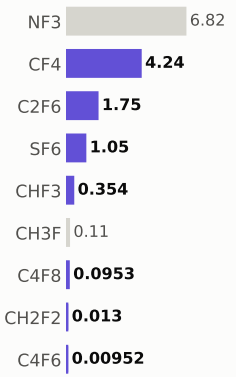

Step #9150: RIE

etch_anisotropic · RIE

1.04	780.1	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

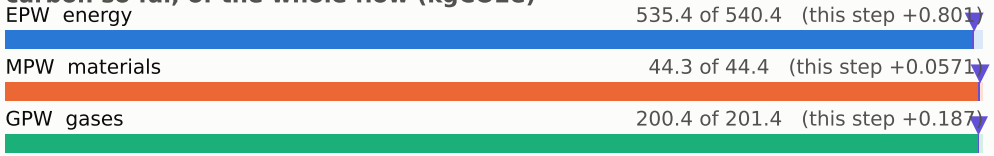


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

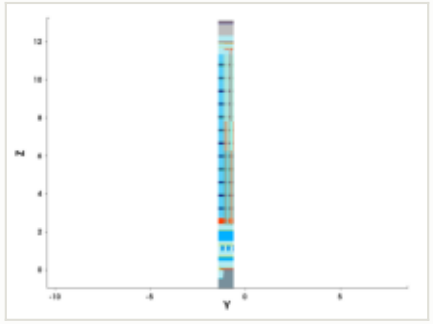


y cut at -1.035 µm

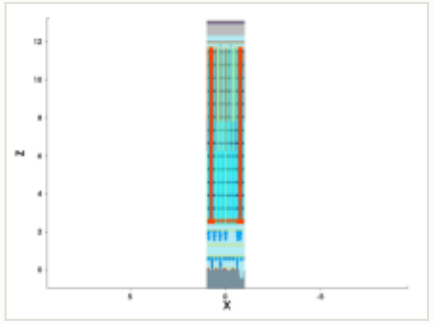


mask for this step

no mask for this step


steps by process area

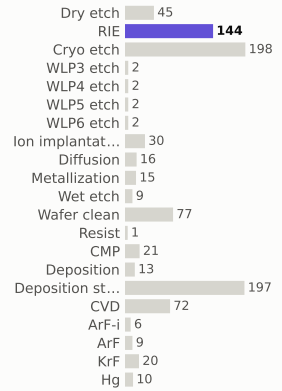

materials deposited (g)

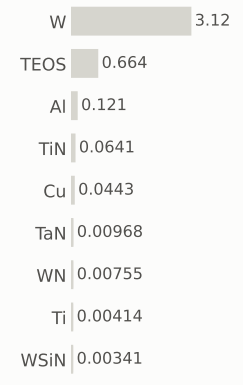

gases emitted (g)

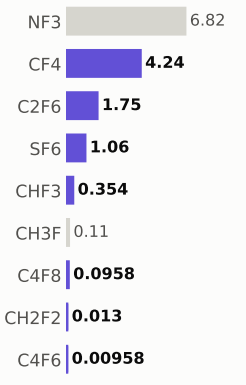

Step #9160: Dry_etch

etch_strip · Dry_etch

0.801	780.9	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

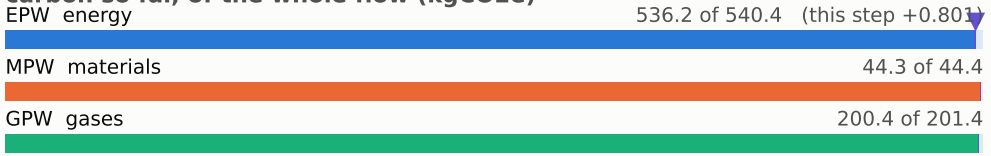


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

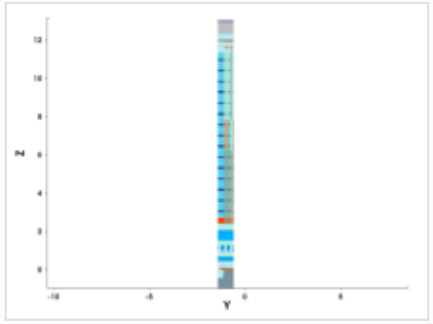


y cut at -1.035 µm

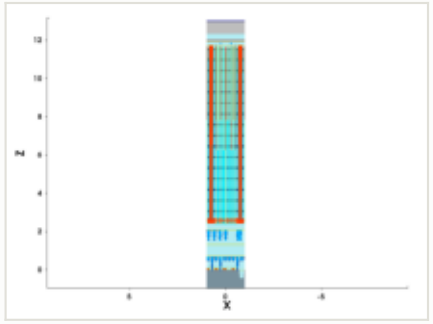

mask for this step

no mask for this step


steps by process area

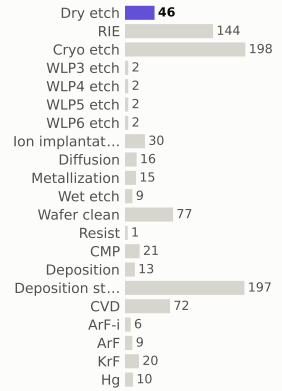

materials deposited (g)



gases emitted (g)



Step #9170: Wafer_clean

clean · Wafer_clean

0.169	781.0	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow


3D structure after this step

zoomed to fit






x cut at 0.000 µm

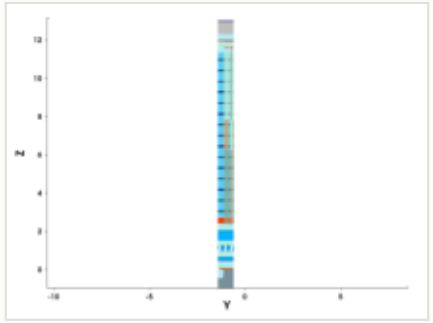

y cut at -1.035 µm

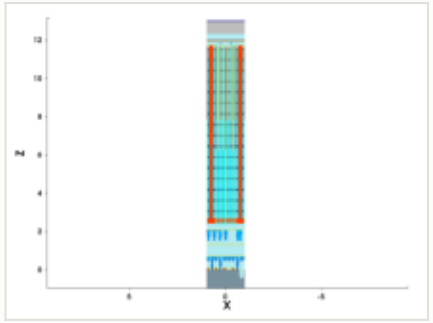

mask for this step

no mask for this step


this step

process area	Wafer_clean
material	—
thickness	—
material GWP	—
input gases	—
energy	0.28 kWh + 0.112 overhead


EPW	0.169 kgCO2e
EPW tool	0.12 kgCO2e
EPW overhead	0.0482 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

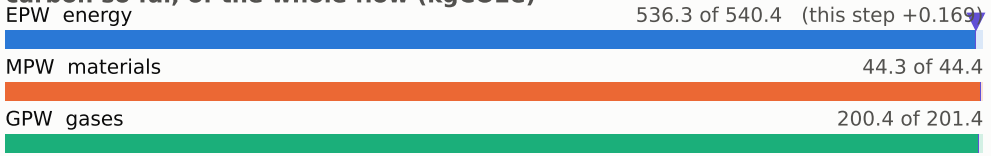


embodied carbon up to each step (kgCO2e per wafer)




steps by process area

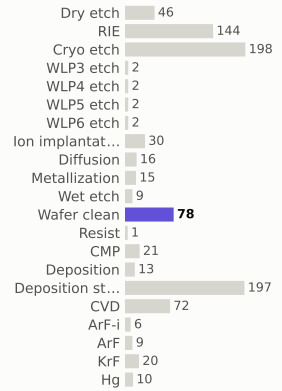

materials deposited (g)

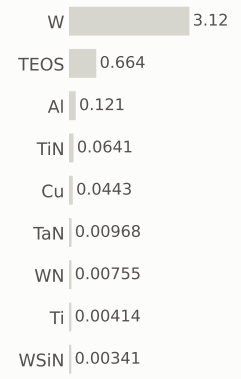

gases emitted (g)

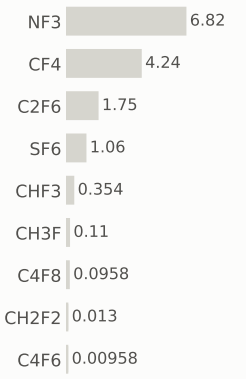

Step #9190: Deposition

depo_isotropic · Deposition

0.656	781.7	0.083%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Deposition
material	TEOS
thickness	1.1 µm
material GWP	2.85952 gCO2e/g
input gases	—
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.000209 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.656 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

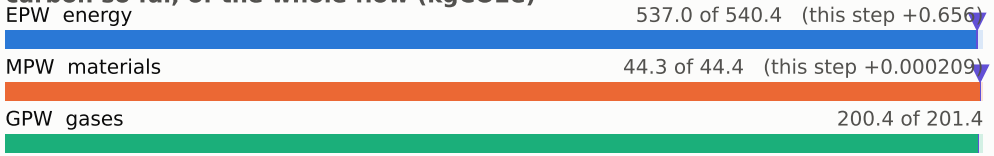


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

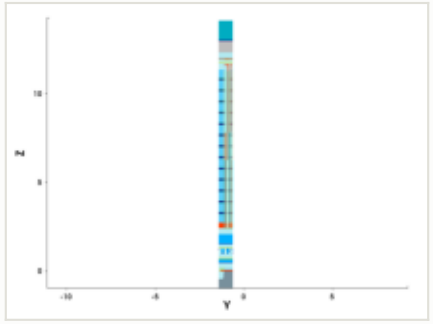


y cut at -1.035 µm

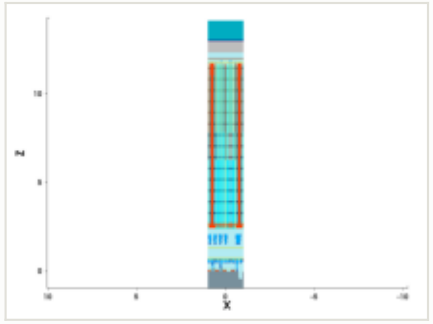


mask for this step

no mask for this step


steps by process area

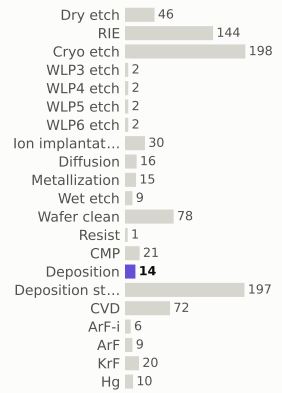

materials deposited (g)

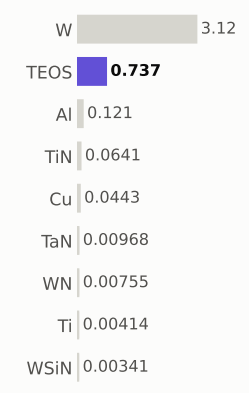

gases emitted (g)

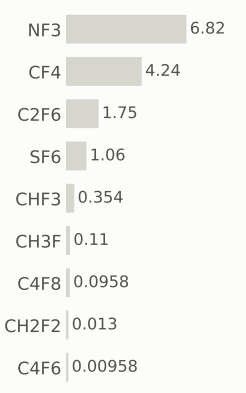

Step #9200: CVD

depo_isotropic · CVD

1.31	783.0	0.17%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	CVD
material	—
thickness	0.3 µm
material GWP	—
input gases	NF3 2.54 g
energy	1.09 kWh + 0.436 overhead

EPW	0.656 kgCO2e
EPW tool	0.469 kgCO2e
EPW overhead	0.187 kgCO2e
MPW	0.0318 kgCO2e (gas 0.0318)
GPW	0.62 kgCO2e
embodied carbon	**1.31 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

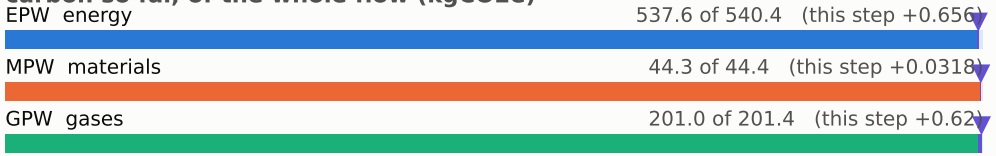


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

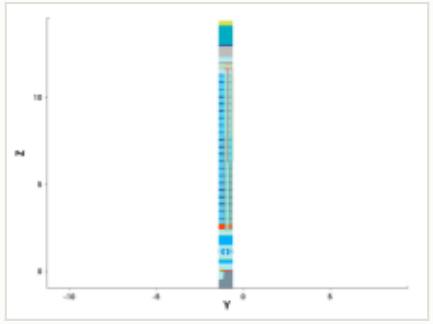


y cut at -1.035 µm

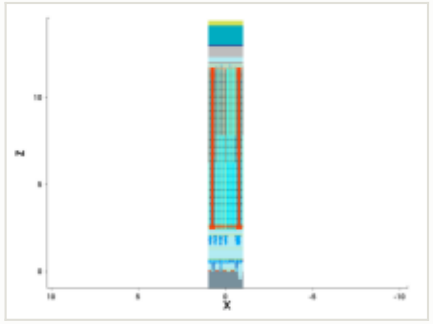

mask for this step

no mask for this step


steps by process area

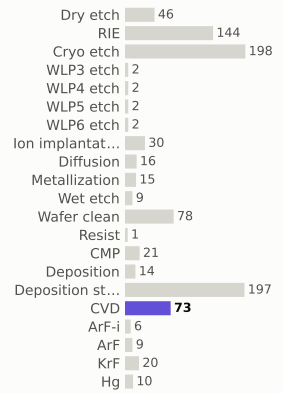

materials deposited (g)



gases emitted (g)



Step #9210: Hg


litho_patterning · Hg

0.199	783.2	0.025%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



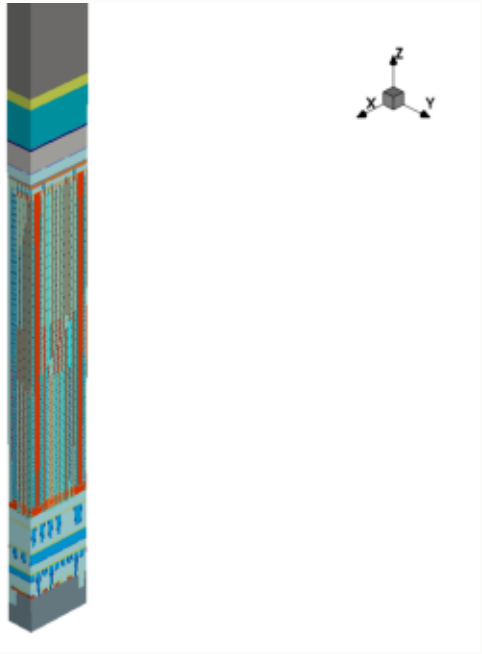


this step


process area	Hg
material	—
thickness	—
material GWP	—
input gases	—
energy	0.33 kWh + 0.132 overhead

EPW	0.199 kgCO2e
EPW tool	0.142 kgCO2e
EPW overhead	0.0568 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.199 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

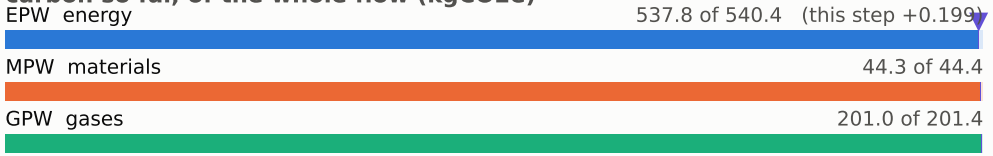


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

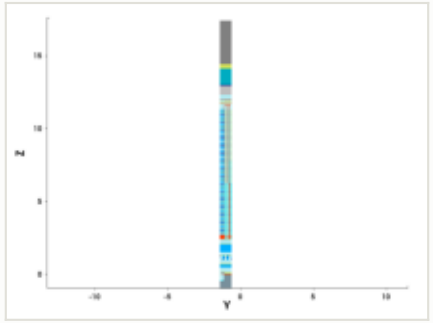


y cut at -1.035 µm

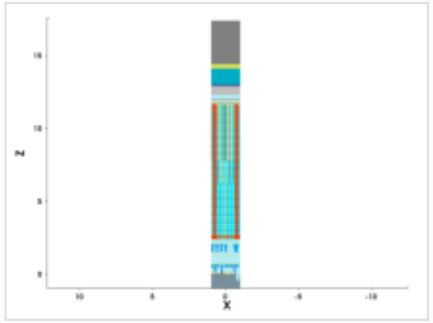

mask: layer 47:0, positive (OASIS)




steps by process area

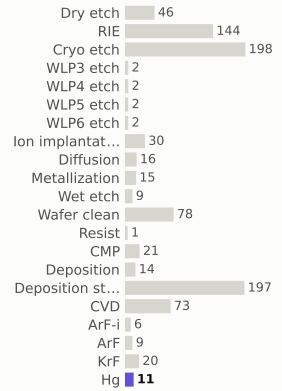

materials deposited (g)



gases emitted (g)

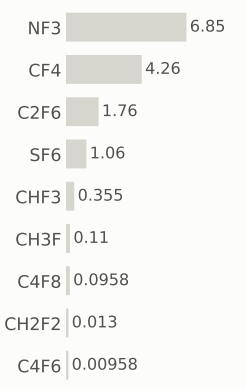

Step #9220: RIE

etch_anisotropic · RIE

1.04	784.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

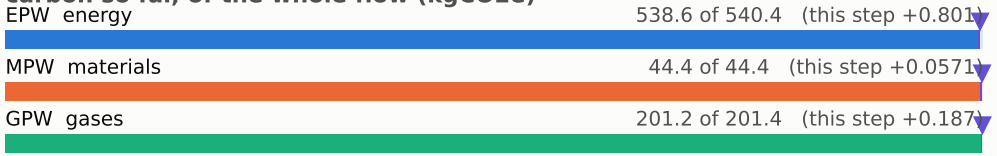


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

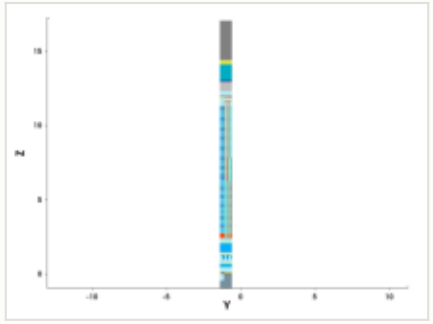


y cut at -1.035 µm

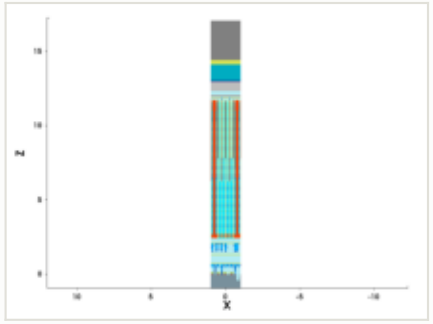


mask for this step

no mask for this step


steps by process area

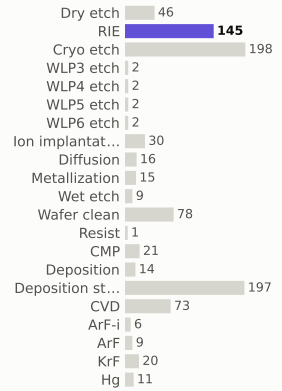

materials deposited (g)

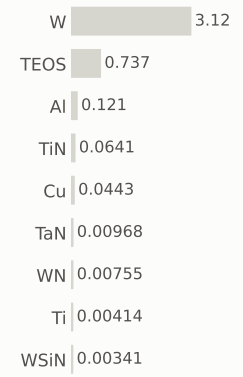

gases emitted (g)

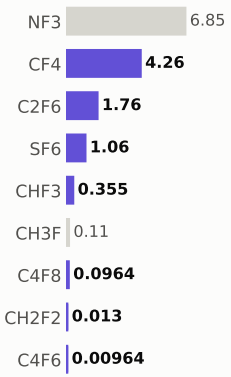

Step #9230: RIE


etch_anisotropic · RIE

1.04	785.3	0.13%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit



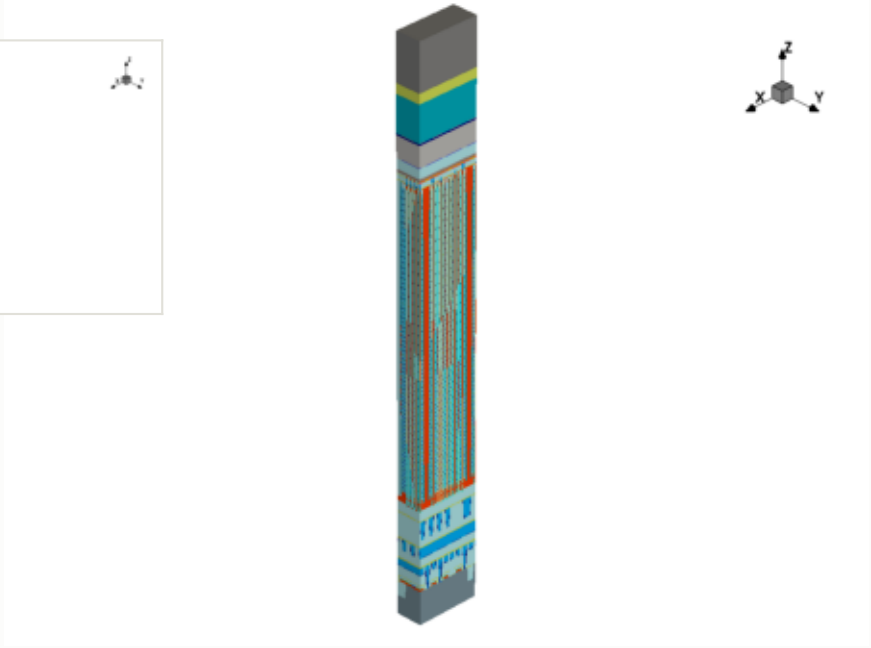


this step


process area	RIE
material	—
thickness	—
material GWP	—
input gases	C4F8 0.16 g, SF6 0.439 g
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0.0571 kgCO2e (gas 0.0571)
GPW	0.187 kgCO2e
embodied carbon	**1.04 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

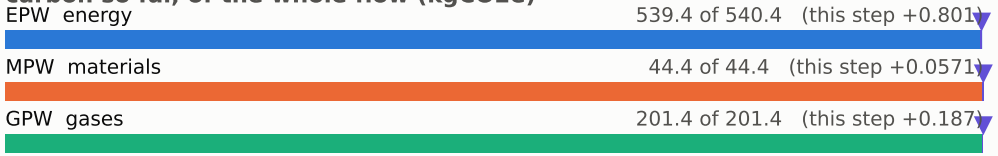


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

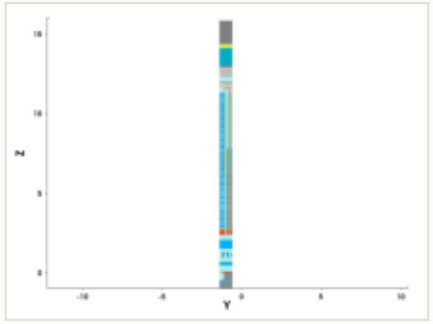


y cut at -1.035 µm

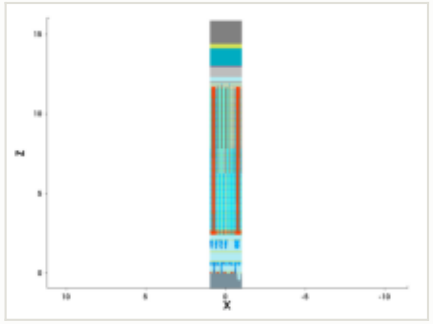

mask for this step

no mask for this step


steps by process area

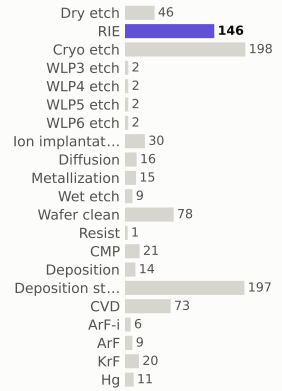

materials deposited (g)



gases emitted (g)

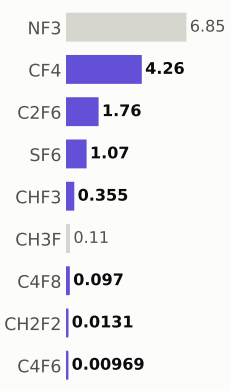

Step #9240: Dry_etch

etch_strip · Dry_etch

0.801	786.1	0.1%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Dry_etch
material	—
thickness	—
material GWP	—
input gases	—
energy	1.33 kWh + 0.532 overhead

EPW	0.801 kgCO2e
EPW tool	0.572 kgCO2e
EPW overhead	0.229 kgCO2e
MPW	0 kgCO2e
GPW	0 kgCO2e
embodied carbon	**0.801 kgCO2e**


carbon so far, of the whole flow (kgCO2e)

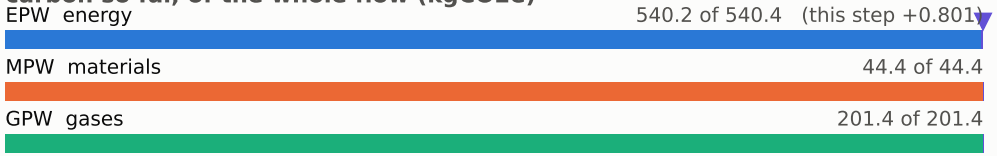


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

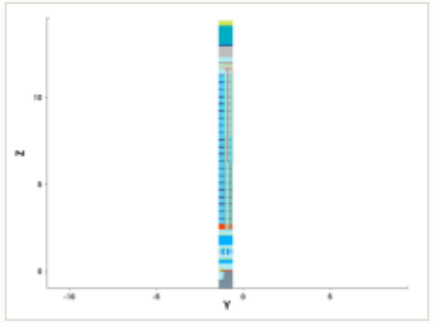


y cut at -1.035 µm

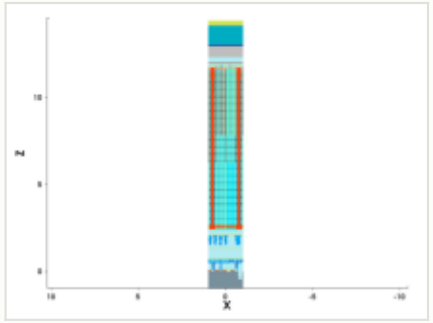

mask for this step

no mask for this step


steps by process area

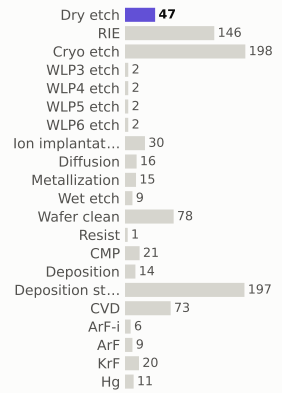

materials deposited (g)



gases emitted (g)

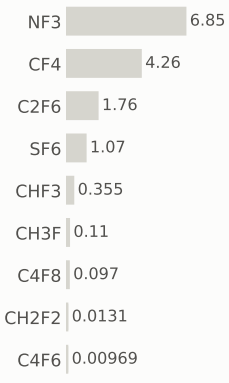

Step #9250: Wafer_clean

clean · Wafer_clean

0.169	786.3	0.021%
this step (kgCO2e)	flow so far (kgCO2e)	share of the flow

3D structure after this step

zoomed to fit






this step


process area	Wafer_clean	EPW	0.169 kgCO2e
material	—	EPW tool	0.12 kgCO2e
thickness	—	EPW overhead	0.0482 kgCO2e
material GWP	—	MPW	0 kgCO2e
input gases	—	GPW	0 kgCO2e
energy	0.28 kWh + 0.112 overhead	embodied carbon	**0.169 kgCO2e**

carbon-only step: no spx operation (structure unchanged)


carbon so far, of the whole flow (kgCO2e)

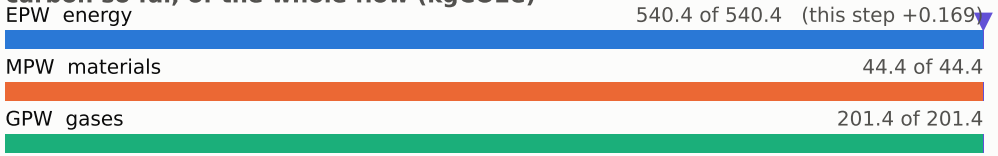


embodied carbon up to each step (kgCO2e per wafer)



x cut at 0.000 µm

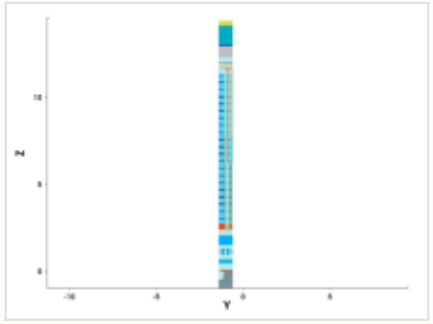


y cut at -1.035 µm

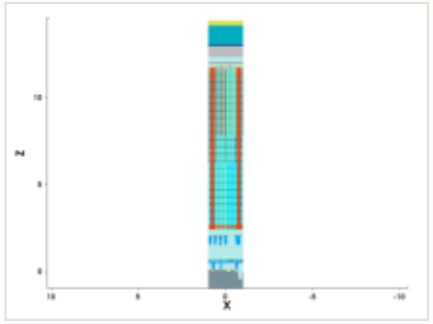


mask for this step

no mask for this step


steps by process area

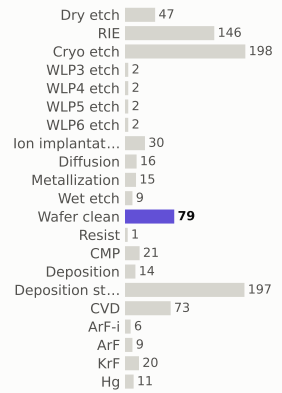

materials deposited (g)

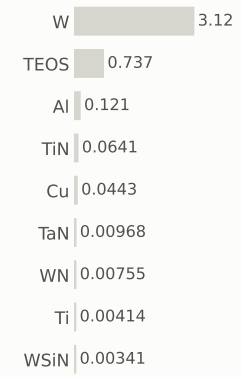


gases emitted (g)

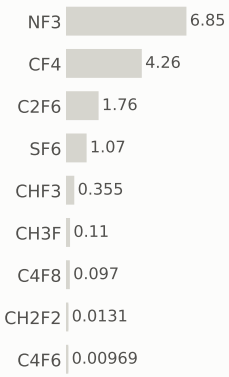

Carbon by module

kgCO2e per wafer, in flow order (steps in brackets)

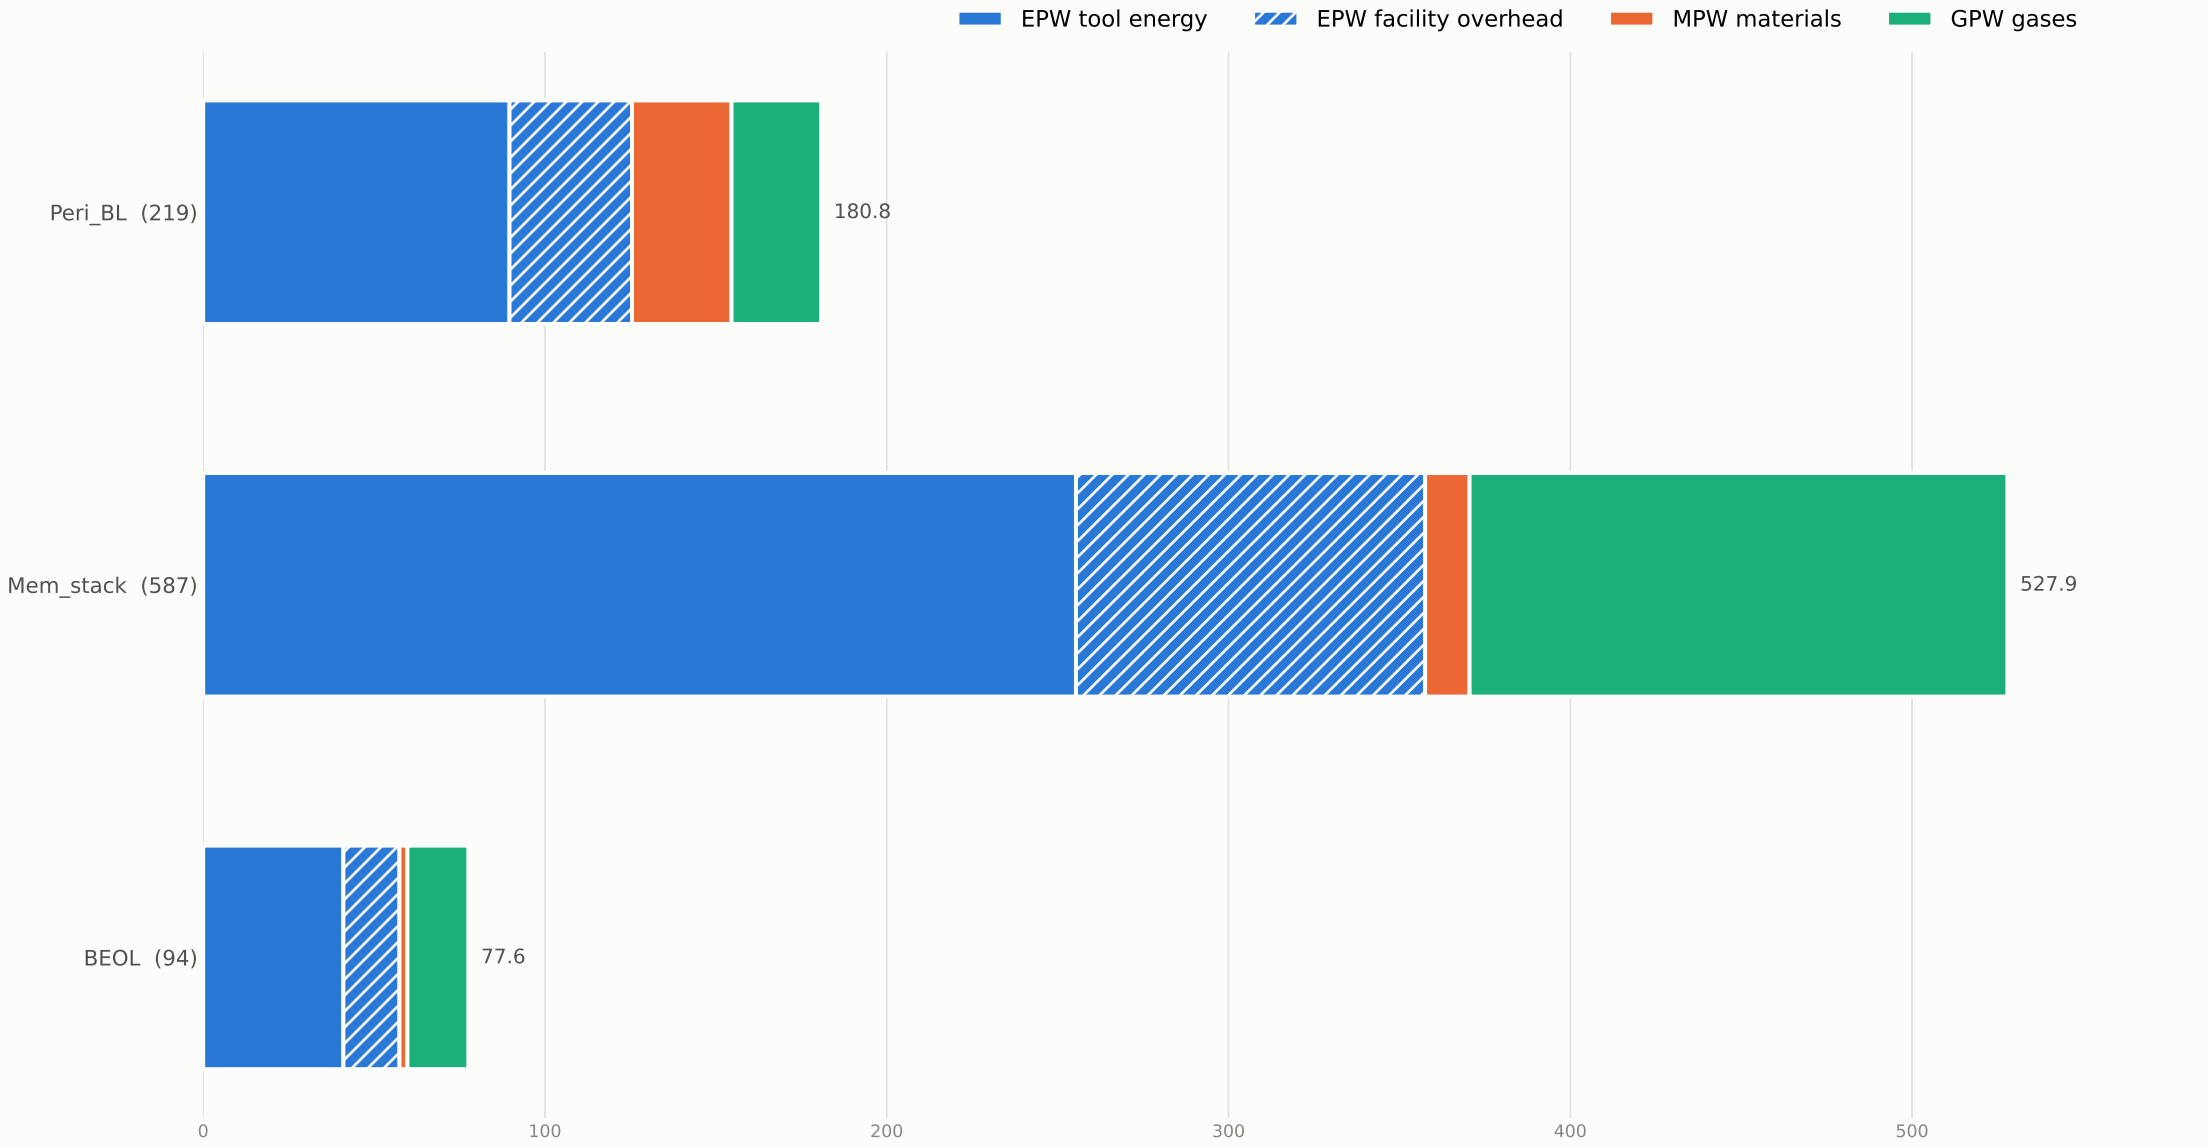

Totals by process area

kgCO2e per wafer; EPW = tool + facility overhead (overhead energy = tool energy x 0.4)

process area	steps	tool kWh	overhead kWh	EPW tool	EPW overhead	EPW	MPW	GPW	total
Deposition_stack	197	214.18	85.67	92.10	36.84	128.94	6.24	121.92	257.10
RIE	146	194.18	77.67	83.50	33.40	116.90	8.33	27.31	152.54
Cryo_etch	198	165.33	66.13	71.09	28.44	99.53	0.06	2.77	102.36
CVD	73	79.57	31.83	34.22	13.69	47.90	2.32	45.29	95.52
Dry_etch	47	62.51	25.00	26.88	10.75	37.63	0.00	0.00	37.63
Ion_implantation	30	39.90	15.96	17.16	6.86	24.02	0.00	0.00	24.02
Metallization	15	30.00	12.00	12.90	5.16	18.06	0.24	0.00	18.30
Wafer_clean	79	22.12	8.85	9.51	3.80	13.32	0.00	0.00	13.32
Diffusion	16	21.28	8.51	9.15	3.66	12.81	0.00	0.00	12.81
Deposition	14	15.26	6.10	6.56	2.62	9.19	0.00	0.00	9.19
WLP3_etch	2	10.66	4.26	4.58	1.83	6.42	0.46	1.50	8.37
WLP4_etch	2	10.66	4.26	4.58	1.83	6.42	0.46	1.50	8.37
WLP5_etch	2	5.34	2.14	2.30	0.92	3.21	0.23	0.75	4.19
KrF	20	6.60	2.64	2.84	1.14	3.97	0.00	0.00	3.97
CMP	21	5.88	2.35	2.53	1.01	3.54	0.00	0.00	3.54
Hg	11	3.63	1.45	1.56	0.62	2.19	0.00	0.00	2.19
WLP6_etch	2	2.66	1.06	1.14	0.46	1.60	0.11	0.37	2.09
ArF	9	2.97	1.19	1.28	0.51	1.79	0.00	0.00	1.79
Wet_etch	9	2.52	1.01	1.08	0.43	1.52	0.00	0.00	1.52
ArF-i	6	2.16	0.86	0.93	0.37	1.30	0.00	0.00	1.30
Resist	1	0.28	0.11	0.12	0.05	0.17	0.00	0.00	0.17